

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Report No.: RFBBUI-WTW-P26020159-5
FCC ID: TX2-RTL8922D
Product: 11be RTL8922D M.2 1216 Combo module
Brand: REALTEK
Model No.: RTL8922D
Received Date: 2026/2/9
Test Date: 2026/3/26 ~ 2026/5/27
Issued Date: 2026/7/21

Applicant: Realtek Semiconductor Corp.
Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories
Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
Test Location(1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan
Test Location(2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
FCC Registration / 788550 / TW0003 for Test Location(1)
Designation Number: 281270 / TW0032 for Test Location(2)

Approved by:

Jeremy Lin

Jeremy Lin / Project Engineer

, Date:

2026/7/21

This test report consists of 421 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Polly Chien / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information.....	7
3.1 General Description.....	7
3.2 Antenna Description of EUT.....	8
3.3 MRU Configuration.....	9
3.4 Channel List.....	9
3.5 Test Mode Applicability and Tested Channel Detail.....	10
3.6 Duty Cycle of Test Signal.....	12
3.7 Test Program Used and Operation Descriptions.....	14
3.8 Connection Diagram of EUT and Peripheral Devices.....	14
3.9 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 RF Output Power.....	15
4.2 Power Spectral Density	15
4.3 6 dB Bandwidth	15
4.4 Conducted Out of Band Emissions	15
4.5 AC Power Conducted Emissions	16
4.6 Unwanted Emissions below 1 GHz	17
4.7 Unwanted Emissions above 1 GHz.....	18
5 Limits of Test Items.....	19
5.1 RF Output Power.....	19
5.2 Power Spectral Density	19
5.3 6 dB Bandwidth	19
5.4 Conducted Out of Band Emissions	19
5.5 AC Power Conducted Emissions	19
5.6 Unwanted Emissions below 1 GHz	19
5.7 Unwanted Emissions above 1 GHz.....	20
6 Test Arrangements.....	21
6.1 RF Output Power.....	21
6.1.1 Test Setup	21
6.1.2 Test Procedure.....	21
6.2 Power Spectral Density	21
6.2.1 Test Setup	21
6.2.2 Test Procedure.....	21
6.3 6 dB Bandwidth	22
6.3.1 Test Setup	22
6.3.2 Test Procedure.....	22
6.4 Conducted Out of Band Emissions	23
6.4.1 Test Setup	23
6.4.2 Test Procedure.....	23
6.5 AC Power Conducted Emissions	24
6.5.1 Test Setup	24
6.5.2 Test Procedure.....	24
6.6 Unwanted Emissions below 1 GHz	25
6.6.1 Test Setup	25
6.6.2 Test Procedure.....	26
6.7 Unwanted Emissions above 1 GHz.....	27
6.7.1 Test Setup	27
6.7.2 Test Procedure.....	27

7	Test Results of Test Item	28
7.1	RF Output Power	28
7.2	Power Spectral Density	34
7.3	6 dB Bandwidth	46
7.4	Conducted Out of Band Emissions	56
7.5	AC Power Conducted Emissions	112
7.6	Unwanted Emissions below 1 GHz	116
7.7	Unwanted Emissions above 1 GHz	120
8	Pictures of Test Arrangements	420
9	Information of the Testing Laboratories	421

Release Control Record

Issue No.	Description	Date Issued
RFBBUI-WTW-P26020159-5	Original release.	2026/7/21

1 Certificate

Product: 11be RTL8922D M.2 1216 Combo module
Brand: REALTEK
Test Model: RTL8922D
Sample Status: Engineering sample
Applicant: Realtek Semiconductor Corp.
Test Date: 2026/3/26 ~ 2026/5/27
Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)
Measurement procedure: ANSI C63.10-2020
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -7.58 dB at 0.74432 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -1.5 dB at 299.66 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -1.5 dB at 2390.00 MHz and 2483.50 MHz
15.203	Antenna Requirement	Pass	Antenna connector is IPEX, MHF4 & Quick couple RP PLUG & not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.79 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.88 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	11be RTL8922D M.2 1216 Combo module
Brand	REALTEK
Test Model	RTL8922D
Status of EUT	Engineering sample
Power Supply Rating	3.3 Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 300 Mbps VHT: up to 400 Mbps 802.11ax: up to 573.5 Mbps 802.11be: up to 688.2 Mbps
Operating Frequency	2.412 GHz ~ 2.472 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20), 802.11be (EHT20):13 802.11n (HT40), VHT40, 802.11ax (HE40), 802.11be (EHT40):9
Partial RU Mode	Single RU Multi-RU
Channel Puncturing	Not support
Output Power	1TX: 162.93 mW (22.12 dBm) 2TX: 272.3 mW (24.35 dBm)

Note:

1. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.
2. Simultaneously transmission combination.

1Tx		
Combination	Technology	
	S0 (Chain 1)	S1 (Chain 0)
1	WLAN (5 GHz)_H	Bluetooth + WLAN (5 GHz)_L
2	WLAN (6 GHz)	Bluetooth + WLAN (5 GHz)_H
3	WLAN (5 GHz)_H	Bluetooth + WLAN (6 GHz)
4	WLAN (2.4 GHz)	Bluetooth + WLAN (5 GHz)_Full
5	WLAN (2.4 GHz)	WLAN (6 GHz)
6	WLAN (5 GHz)_Full	Bluetooth
7	WLAN (6 GHz)	Bluetooth
2Tx		
1	WLAN (5 GHz)_L + Bluetooth	WLAN (5 GHz)_L + Bluetooth
2	WLAN (5 GHz)_H + Bluetooth	WLAN (5 GHz)_H + Bluetooth
3	WLAN (6 GHz) + Bluetooth	WLAN (6 GHz) + Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	Chain 0/1	REALTEK	RTK-ANT-0022	3.40	2.4~2.4835	PIFA	IPEX, MHF4	300
				5.00	5.15~5.895			
				5.00	5.925~7.125			
2	Chain 0/1	HongBo	260-25096	3.11	2.4~2.4835	Monopole	MHF4L	300
				4.91	5.15~5.895			
				4.73	5.925~7.125			

*Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	1Tx Diversity/2Tx	2RX
802.11g	1Tx Diversity/2Tx	2RX
802.11n (HT20)	1Tx Diversity/2Tx	2RX
802.11n (HT40)	1Tx Diversity/2Tx	2RX
VHT20	1Tx Diversity/2Tx	2RX
VHT40	1Tx Diversity/2Tx	2RX
802.11ax (HE20)	1Tx Diversity/2Tx	2RX
802.11ax (HE40)	1Tx Diversity/2Tx	2RX
802.11be (EHT20)	1Tx Diversity/2Tx	2RX
802.11be (EHT40)	1Tx Diversity/2Tx	2RX
802.11ax (RU26/52/106/242/484)	1Tx Diversity/2Tx	2RX
802.11be (RU26/52/106/242/484 MRU52+26/106+26)	1Tx Diversity/2Tx	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz), VHT mode for 20 MHz (40 MHz), 802.11ax mode for 20 MHz (40 MHz) and 802.11be mode for 20 MHz (40 MHz). Therefore, the investigated worst case is the representative mode in test report.

3.3 MRU Configuration

Small MRU	
Tone-plan	EUT supported (Y)
52+26-tone	EUT supported (Y)
106+26-tone	EUT supported (Y)
Note: The EUT supports both 52+26-tone and 106+26-tone small MRU tone-plans across all applicable bandwidths (20/40 MHz). The detailed MRU allocations are defined in the IEEE 802.11be specification. The worst-case configuration identified during pretest is presented in this report.	

The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified. (The worst case data were presented in section 3.5)

3.4 Channel List

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

9 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

3.5 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. The PIFA/ monopole antenna can be used in the following ways: X / Y / Z axis. Pre-scan in these ways and find the worst case as a representative test condition. 2. For 1Tx diversity configuration. Pre-scan in these chains and find the worst case as a representative test condition. 3. All bandwidths supported by the EUT were covered during the pre-scan for Partial RU and Multi-RU modes. Based on the results the Partial RU and Multi-RU test modes shown below were selected as the representative worst-case test modes. 4. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.
Worst Case:	1. The antenna sets of the worst case was found when positioned on (X/ Y/ Z axis) ➤ PIFA antenna: Z axis ➤ Monopole antenna: Z axis 2. For 1Tx diversity configuration the worst chain is: Chain 0

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Transmitter Configuration	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
RF Output Power	-	802.11b	1Tx/ 2Tx	1, 6, 11, 12, 13	BPSK	6Mb/s	NA
		802.11g		1, 2, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT20)		1, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT40)		3, 6, 9, 10, 11	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	0, 0, 8, 8, 8
		802.11be (EHT20) 52-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	37, 37, 40, 40, 40
		802.11be (EHT20) 106-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	53, 53, 54, 54, 54
		802.11be (EHT20) 52+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
		802.11be (EHT20) 106+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
Power Spectral Density	-	802.11b	1Tx/ 2Tx	1, 6, 11, 12, 13	BPSK	6Mb/s	NA
		802.11g		1, 2, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT20)		1, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT40)		3, 6, 9, 10, 11	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	0, 0, 8, 8, 8
		802.11be (EHT20) 52-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	37, 37, 40, 40, 40
		802.11be (EHT20) 106-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	53, 53, 54, 54, 54
		802.11be (EHT20) 52+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
		802.11be (EHT20) 106+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2

Test Item	EUT Configure Mode	Mode	Transmitter Configuration	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
6 dB Bandwidth / Conducted Out of Band Emissions	-	802.11b	1Tx/ 2Tx	1, 6, 11, 12, 13	BPSK	6Mb/s	NA
		802.11g		1, 2, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT20)		1, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT40)		3, 6, 9, 10, 11	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	0, 0, 8, 8, 8
		802.11be (EHT20) 52-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	37, 37, 40, 40, 40
		802.11be (EHT20) 106-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	53, 53, 54, 54, 54
		802.11be (EHT20) 52+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
		802.11be (EHT20) 106+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
AC Power Conducted Emissions	A, B	802.11b	2Tx	6	DBPSK	1Mb/s	NA
Unwanted Emissions below 1 GHz	A, B	802.11b	2Tx	6	DBPSK	1Mb/s	NA
Unwanted Emissions above 1 GHz	A, B	802.11b	1Tx/ 2Tx	1, 6, 11, 12, 13	BPSK	6Mb/s	NA
		802.11g		1, 2, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT20)		1, 6, 11, 12, 13	BPSK	MCS0	NA
		802.11be (EHT40)		3, 6, 9, 10, 11	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	0, 0, 8, 8, 8
		802.11be (EHT20) 52-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	37, 37, 40, 40, 40
		802.11be (EHT20) 106-tone RU		1, 6, 11, 12, 13	BPSK	MCS0	53, 53, 54, 54, 54
		802.11be (EHT20) 52+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
		802.11be (EHT20) 106+26-tone MRU		1, 6, 11, 12, 13	BPSK	MCS0	1, 1, 2, 2, 2
EUT Configure Mode:	A	PIFA antenna					
	B	Monopole antenna					


3.6 Duty Cycle of Test Signal


802.11b: Duty cycle = 1 ms / 1.005 ms x 100% = 99.5%

802.11g: Duty cycle = 0.97 ms / 0.974 ms x 100% = 99.6%


802.11be (EHT20): Duty cycle = 0.96 ms / 0.965 ms x 100% = 99.5%

802.11be (EHT40): Duty cycle = 0.96 ms / 0.965 ms x 100% = 99.5%

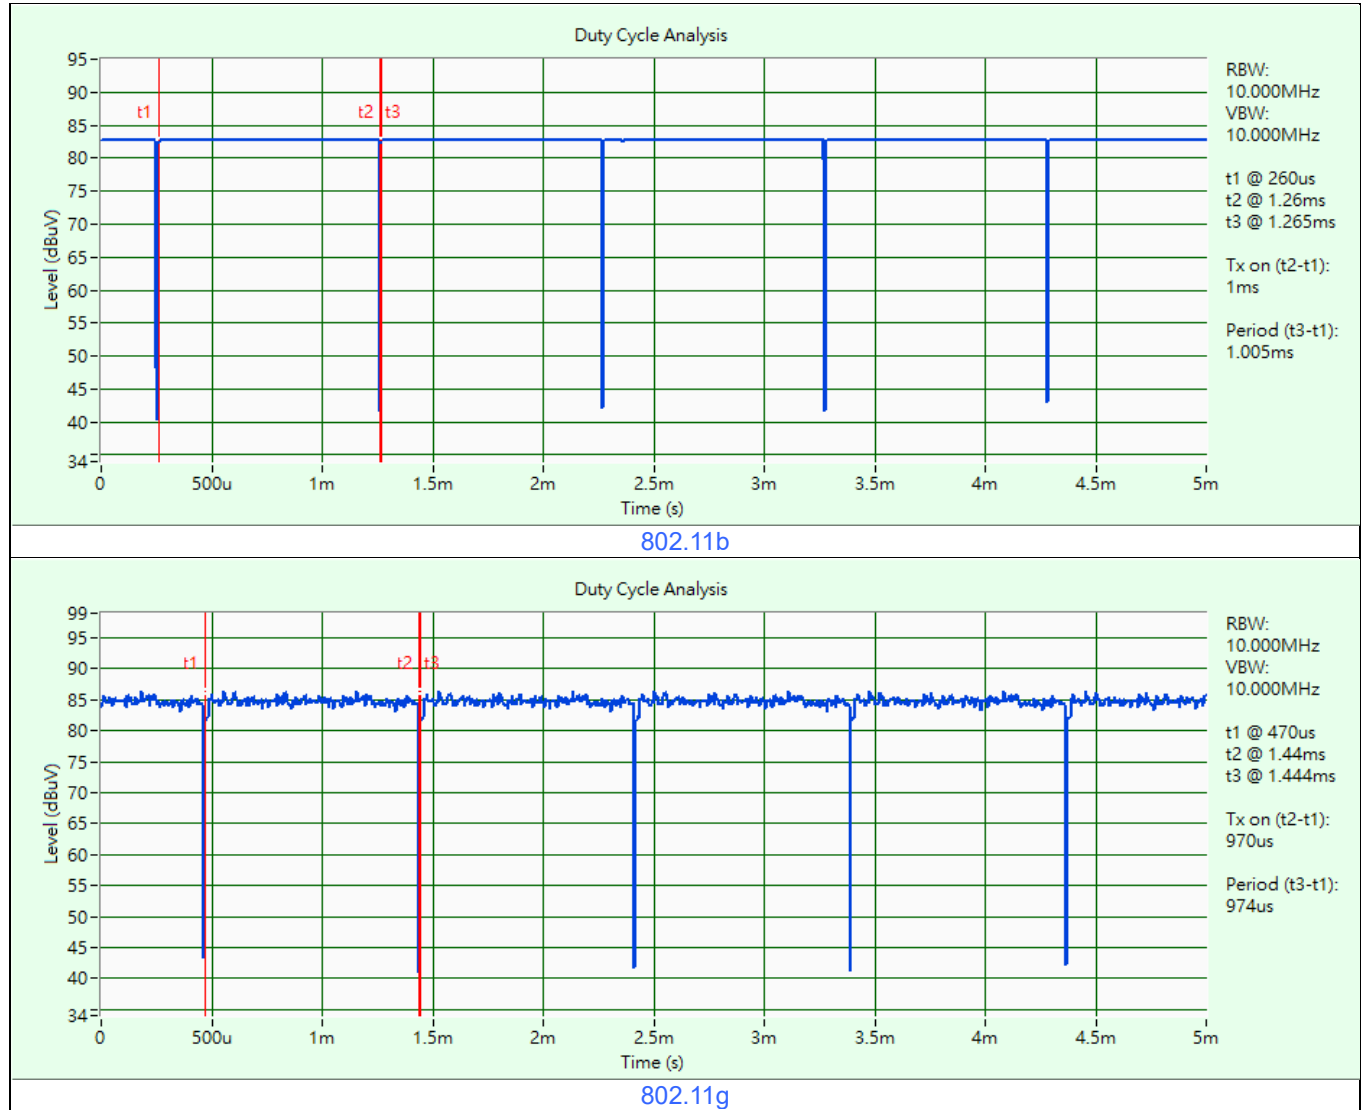

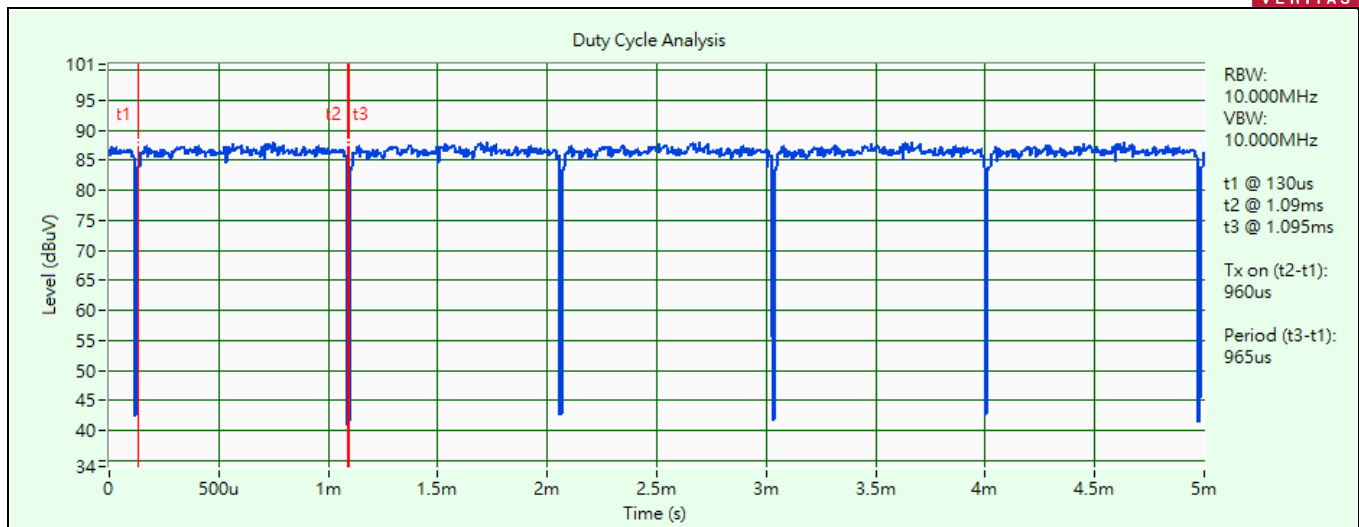

802.11be (EHT20)

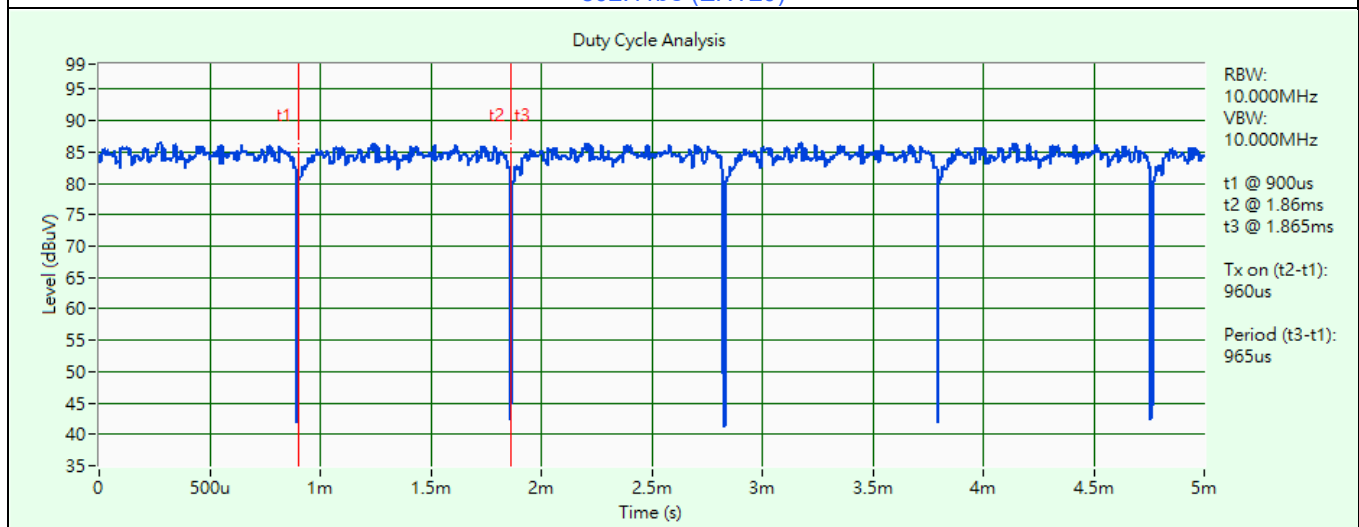


802.11be (EHT40)

3.7 Test Program Used and Operation Descriptions

Controlling software (AX Series MP Tool v1.0.26) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.8 Connection Diagram of EUT and Peripheral Devices

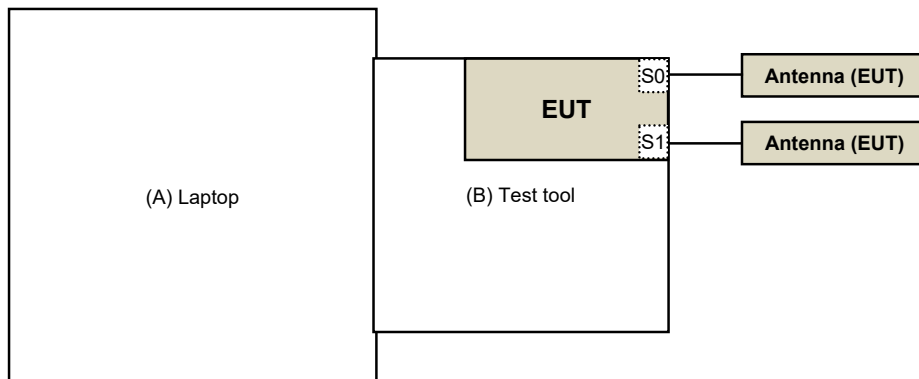

3.9 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenove	L440	N/A	N/A	Provided by Lab
B	Test tool	REALTEK	N/A	N/A	N/A	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23 2026/5/21	2026/5/22 2027/5/20
Peak Power Analyzer Keysight	8990B	MY51000485	2026/1/23	2027/1/22
USB Power Sensor Anritsu	MA24408A	12994	2025/12/5	2026/12/4
Wideband Power Sensor Keysight	N1923A	MY58020002	2026/1/26	2027/1/25
		MY58140009	2026/1/26	2027/1/25
		MY58200003	2025/5/29	2026/5/28

Notes:

1. The test was performed in HY - Oven room(Hwaya).
2. Tested Date: 2026/5/19 ~ 2026/5/27

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23 2026/5/21	2026/5/22 2027/5/20
Signal & Spectrum Analyzer R&S	FSV3044	101504	2025/6/18	2026/6/17
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in HY - Oven room(Hwaya).
2. Tested Date: 2026/5/19 ~ 2026/5/27

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2025/12/4	2026/12/3
	E1-011280	05	2025/12/4	2026/12/3
	E1-011311	09	2025/12/4	2026/12/3
DC LISN Schwarzbeck	NNBM 8126G	8126G-069	2025/11/3	2026/11/2
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01445	2025/4/27	2026/4/26
EMI Test Receiver R&S	ESCI	100613	2025/11/27	2026/11/26
Extension Power Line EMCI	EMCI-EXP-EU-US	023	2026/3/6	2027/3/5
LISN R&S	ENV216	101826	2026/3/6	2027/3/5
	ESH3-Z5	100311	2025/8/28	2026/8/27
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2026/1/3	2027/1/2
Software BVADT	BVADT_Conc_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2025/8/27	2026/8/26

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2026/3/26

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1214	2025/9/18	2026/9/17
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
MXE EMI Receiver Keysight	N9038B	MY60180019	2026/1/14	2027/1/13
Preamplifier EMCI	EMC330N	980798	2026/1/13	2027/1/12
RF Coaxial Cable EMCI	EMCCFD400-NM-NM-500	201248	2026/1/13	2027/1/12
	EMCCFD400-NM-NM-3000	201249	2026/1/13	2027/1/12
	EMCCFD400-NM-NM-9000	201251(with PAD)	2026/1/13	2027/1/12
Signal & Spectrum Analyzer R&S	FSV3044	101504	2025/6/18	2026/6/17
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9(Wenming).
2. Tested Date: 2026/5/6

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
Horn Antenna RFSPIN	DRH18-E	210104A18E	2025/11/9	2026/11/8
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2025/11/9	2026/11/8
MXE EMI Receiver Keysight	N9038B	MY60180019	2026/1/14	2027/1/13
Preamplifier Agilent	83017A	MY39501357	2025/6/11	2026/6/10
Preamplifier EMCI	EMC184045SE	980788	2026/1/13	2027/1/12
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2026/1/13	2027/1/12
		201255	2026/1/13	2027/1/12
	EMC101G-KM-KM-5000	201261	2026/1/13	2027/1/12
	EMC104-SM-SM-1000	210103	2026/1/13	2027/1/12
	EMC104-SM-SM-3000	201241	2026/1/13	2027/1/12
	EMC104-SM-SM-9000	201244	2026/1/13	2027/1/12
Signal & Spectrum Analyzer R&S	FSV3044	101504	2025/6/18	2026/6/17
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9(Wenming).
2. Tested Date: 2026/4/1 ~ 2026/5/5

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup




6.1.2 Test Procedure

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to > 1.5 times the OBW.
- d. Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- e. Set VBW $\geq 3 \times \text{RBW}$.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.

Note: If Duty cycle < 98%, Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

MEASUREMENT PROCEDURE OOB

- Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.
- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = No faster than coupled (auto) time.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

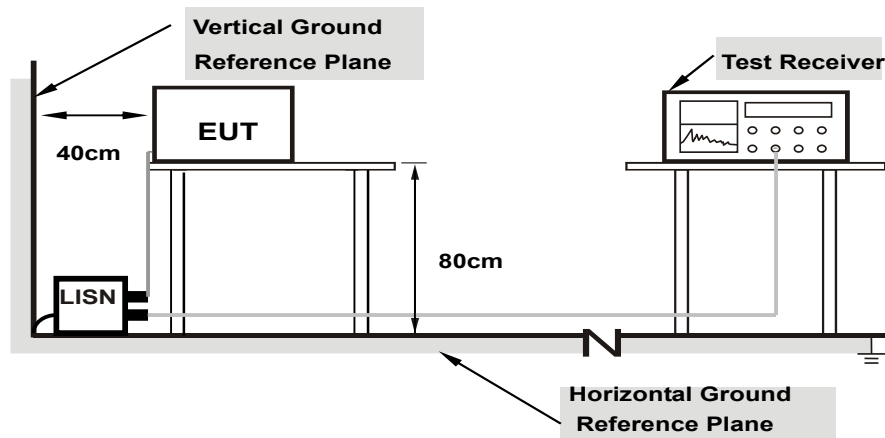

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

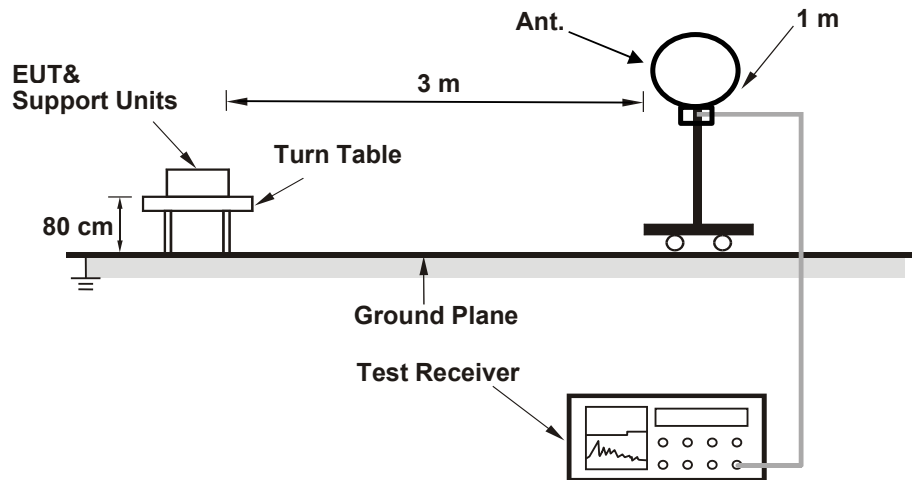

For Radiated emission above 30 MHz

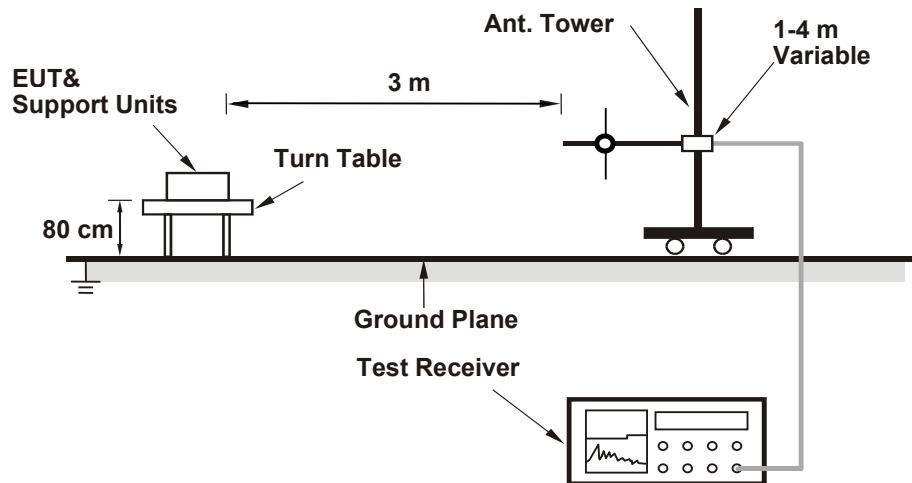

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

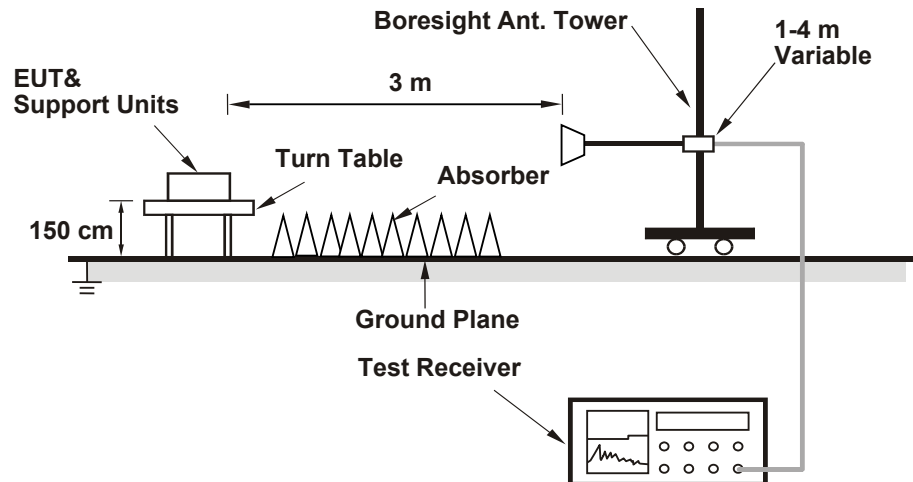

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
---------------------------	--------------	------------	-----------

1TX

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	150.661	21.78	30	Pass
6	2437	158.125	21.99	30	Pass
11	2462	140.605	21.48	30	Pass
12	2467	90.782	19.58	30	Pass
13	2472	33.037	15.19	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	80.538	19.06	30	Pass
2	2417	71.779	18.56	30	Pass
6	2437	162.93	22.12	30	Pass
11	2462	60.256	17.80	30	Pass
12	2467	54.702	17.38	30	Pass
13	2472	32.359	15.10	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	66.988	18.26	30	Pass
6	2437	159.956	22.04	30	Pass
11	2462	57.016	17.56	30	Pass
12	2467	51.05	17.08	30	Pass
13	2472	35.645	15.52	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
3	2422	50.003	16.99	30	Pass
6	2437	61.094	17.86	30	Pass
9	2452	50.933	17.07	30	Pass
10	2457	50.582	17.04	30	Pass
11	2462	28.249	14.51	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	62.373	17.95	30	Pass
6	2437	150.661	21.78	30	Pass
11	2462	57.943	17.63	30	Pass
12	2467	49.888	16.98	30	Pass
13	2472	34.914	15.43	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	45.082	16.54	30	Pass
6	2437	82.604	19.17	30	Pass
11	2462	55.463	17.44	30	Pass
12	2467	49.545	16.95	30	Pass
13	2472	34.594	15.39	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	53.211	17.26	30	Pass
6	2437	106.17	20.26	30	Pass
11	2462	46.774	16.70	30	Pass
12	2467	34.041	15.32	30	Pass
13	2472	30.832	14.89	30	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	66.834	18.25	30	Pass
6	2437	85.31	19.31	30	Pass
11	2462	40.926	16.12	30	Pass
12	2467	28.708	14.58	30	Pass
13	2472	29.309	14.67	30	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
1	2412	48.084	16.82	30	Pass
6	2437	101.625	20.07	30	Pass
11	2462	55.335	17.43	30	Pass
12	2467	45.92	16.62	30	Pass
13	2472	35.318	15.48	30	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

2TX

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	20.42	20.65	226.299	23.55	30	Pass
6	2437	21.30	21.38	272.3	24.35	30	Pass
11	2462	20.88	20.87	244.642	23.89	30	Pass
12	2467	14.86	14.97	62.025	17.93	30	Pass
13	2472	11.86	12.04	31.342	14.96	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	18.56	18.69	145.74	21.64	30	Pass
2	2417	18.69	18.78	149.47	21.75	30	Pass
6	2437	21.19	21.32	267.041	24.27	30	Pass
11	2462	17.40	17.52	111.448	20.47	30	Pass
12	2467	16.86	17.02	98.879	19.95	30	Pass
13	2472	14.88	14.95	62.022	17.93	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.89	17.13	100.507	20.02	30	Pass
6	2437	20.23	20.32	213.085	23.29	30	Pass
11	2462	17.62	17.70	116.694	20.67	30	Pass
12	2467	16.48	16.47	88.824	19.49	30	Pass
13	2472	15.58	15.69	73.209	18.65	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	15.92	16.08	79.635	19.01	30	Pass
6	2437	16.95	17.05	100.244	20.01	30	Pass
9	2452	16.19	16.27	83.955	19.24	30	Pass
10	2457	15.93	16.04	79.353	19.00	30	Pass
11	2462	14.98	15.06	63.54	18.03	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.79	16.88	96.506	19.85	30	Pass
6	2437	17.86	17.92	123.038	20.90	30	Pass
11	2462	16.21	16.39	85.334	19.31	30	Pass
12	2467	16.19	16.28	84.053	19.25	30	Pass
13	2472	13.24	13.42	43.065	16.34	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.27	16.33	85.318	19.31	30	Pass
6	2437	17.94	18.06	126.204	21.01	30	Pass
11	2462	15.55	15.64	72.536	18.61	30	Pass
12	2467	15.60	15.61	72.699	18.62	30	Pass
13	2472	14.22	14.34	53.588	17.29	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.82	16.95	97.629	19.90	30	Pass
6	2437	19.12	19.17	164.262	22.16	30	Pass
11	2462	15.49	15.66	72.213	18.59	30	Pass
12	2467	16.22	16.31	84.636	19.28	30	Pass
13	2472	14.23	14.32	53.525	17.29	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	16.40	16.47	88.012	19.45	30	Pass
6	2437	20.01	20.12	203.032	23.08	30	Pass
11	2462	14.82	15.01	62.035	17.93	30	Pass
12	2467	14.91	15.03	62.816	17.98	30	Pass
13	2472	14.76	14.89	60.755	17.84	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	15.71	15.84	75.61	18.79	30	Pass
6	2437	20.07	20.17	205.617	23.13	30	Pass
11	2462	15.19	15.24	66.456	18.23	30	Pass
12	2467	13.52	13.70	45.933	16.62	30	Pass
13	2472	13.56	13.75	46.412	16.67	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 3.4 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

7.2 Power Spectral Density

Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
---------------------------	--------------	------------	-----------

1TX

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-8.22	8	Pass
6	2437	-7.94	8	Pass
11	2462	-8.53	8	Pass
12	2467	-10.40	8	Pass
13	2472	-14.60	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-10.92	8	Pass
2	2417	-11.36	8	Pass
6	2437	-7.77	8	Pass
11	2462	-12.14	8	Pass
12	2467	-12.57	8	Pass
13	2472	-14.83	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20)


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-13.03	8	Pass
6	2437	-9.22	8	Pass
11	2462	-13.69	8	Pass
12	2467	-14.24	8	Pass
13	2472	-15.85	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
3	2422	-16.96	8	Pass
6	2437	-16.08	8	Pass
9	2452	-16.88	8	Pass
10	2457	-16.91	8	Pass
11	2462	-19.21	8	Pass

Note: The antenna gain is 3.4 dBi <= 6 dBi, so the power density limit shall not be reduced.

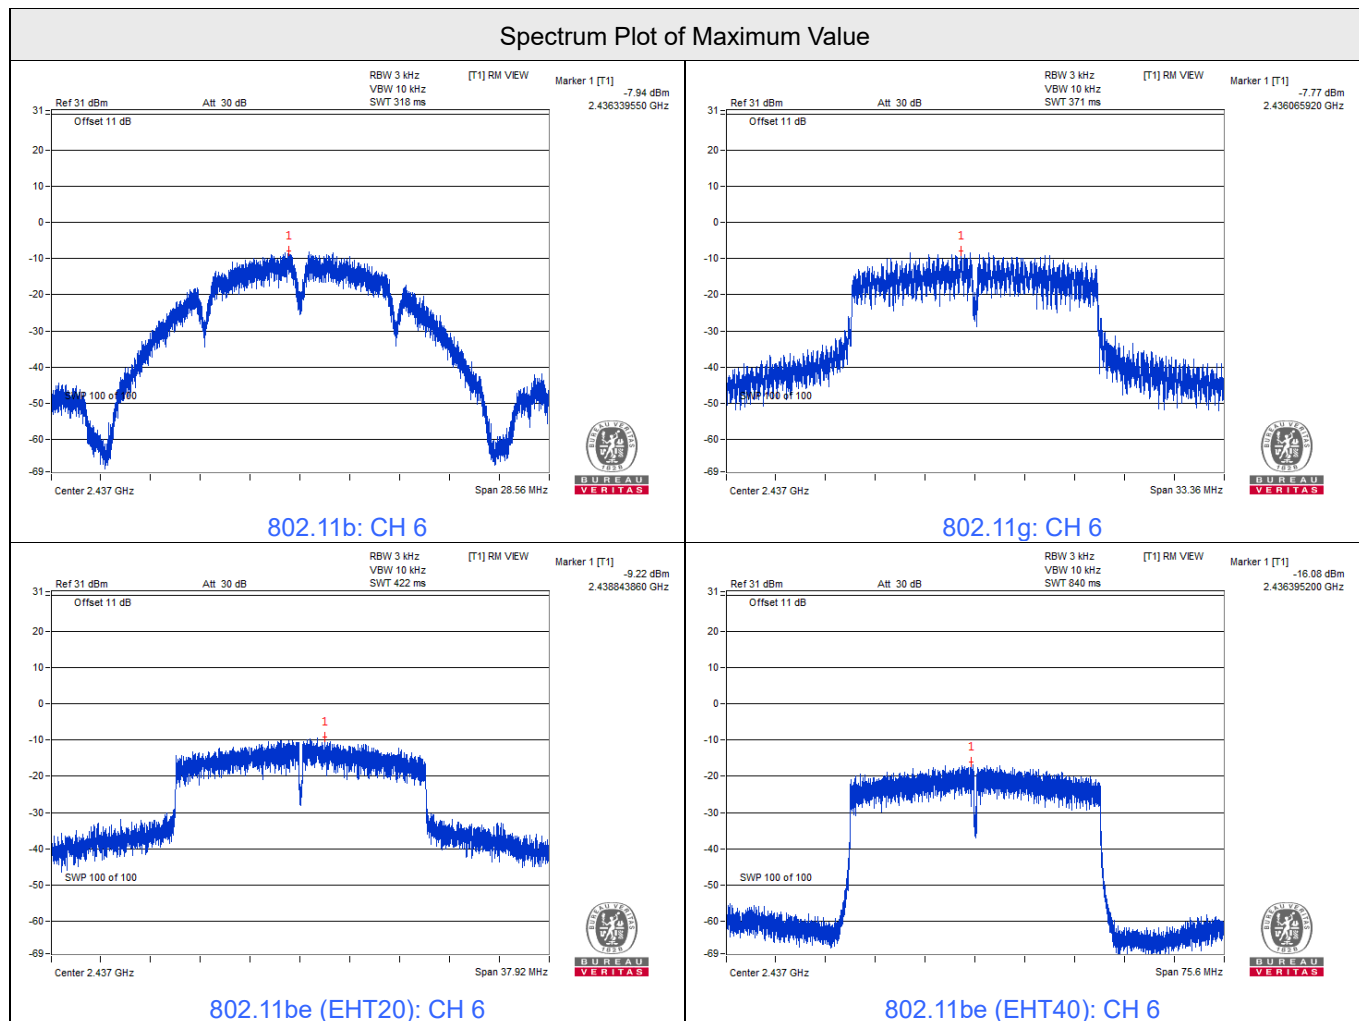

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-5.14	8	Pass
6	2437	-1.38	8	Pass
11	2462	-5.47	8	Pass
12	2467	-6.00	8	Pass
13	2472	-7.54	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-10.05	8	Pass
6	2437	-7.31	8	Pass
11	2462	-8.93	8	Pass
12	2467	-9.42	8	Pass
13	2472	-11.17	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-12.37	8	Pass
6	2437	-9.31	8	Pass
11	2462	-12.85	8	Pass
12	2467	-14.24	8	Pass
13	2472	-14.52	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-8.87	8	Pass
6	2437	-7.91	8	Pass
11	2462	-11.03	8	Pass
12	2467	-12.42	8	Pass
13	2472	-12.32	8	Pass


Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
1	2412	-12.85	8	Pass
6	2437	-9.76	8	Pass
11	2462	-12.31	8	Pass
12	2467	-13.08	8	Pass
13	2472	-14.26	8	Pass

Note: The antenna gain is 3.4 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

Spectrum Plot of Maximum Value

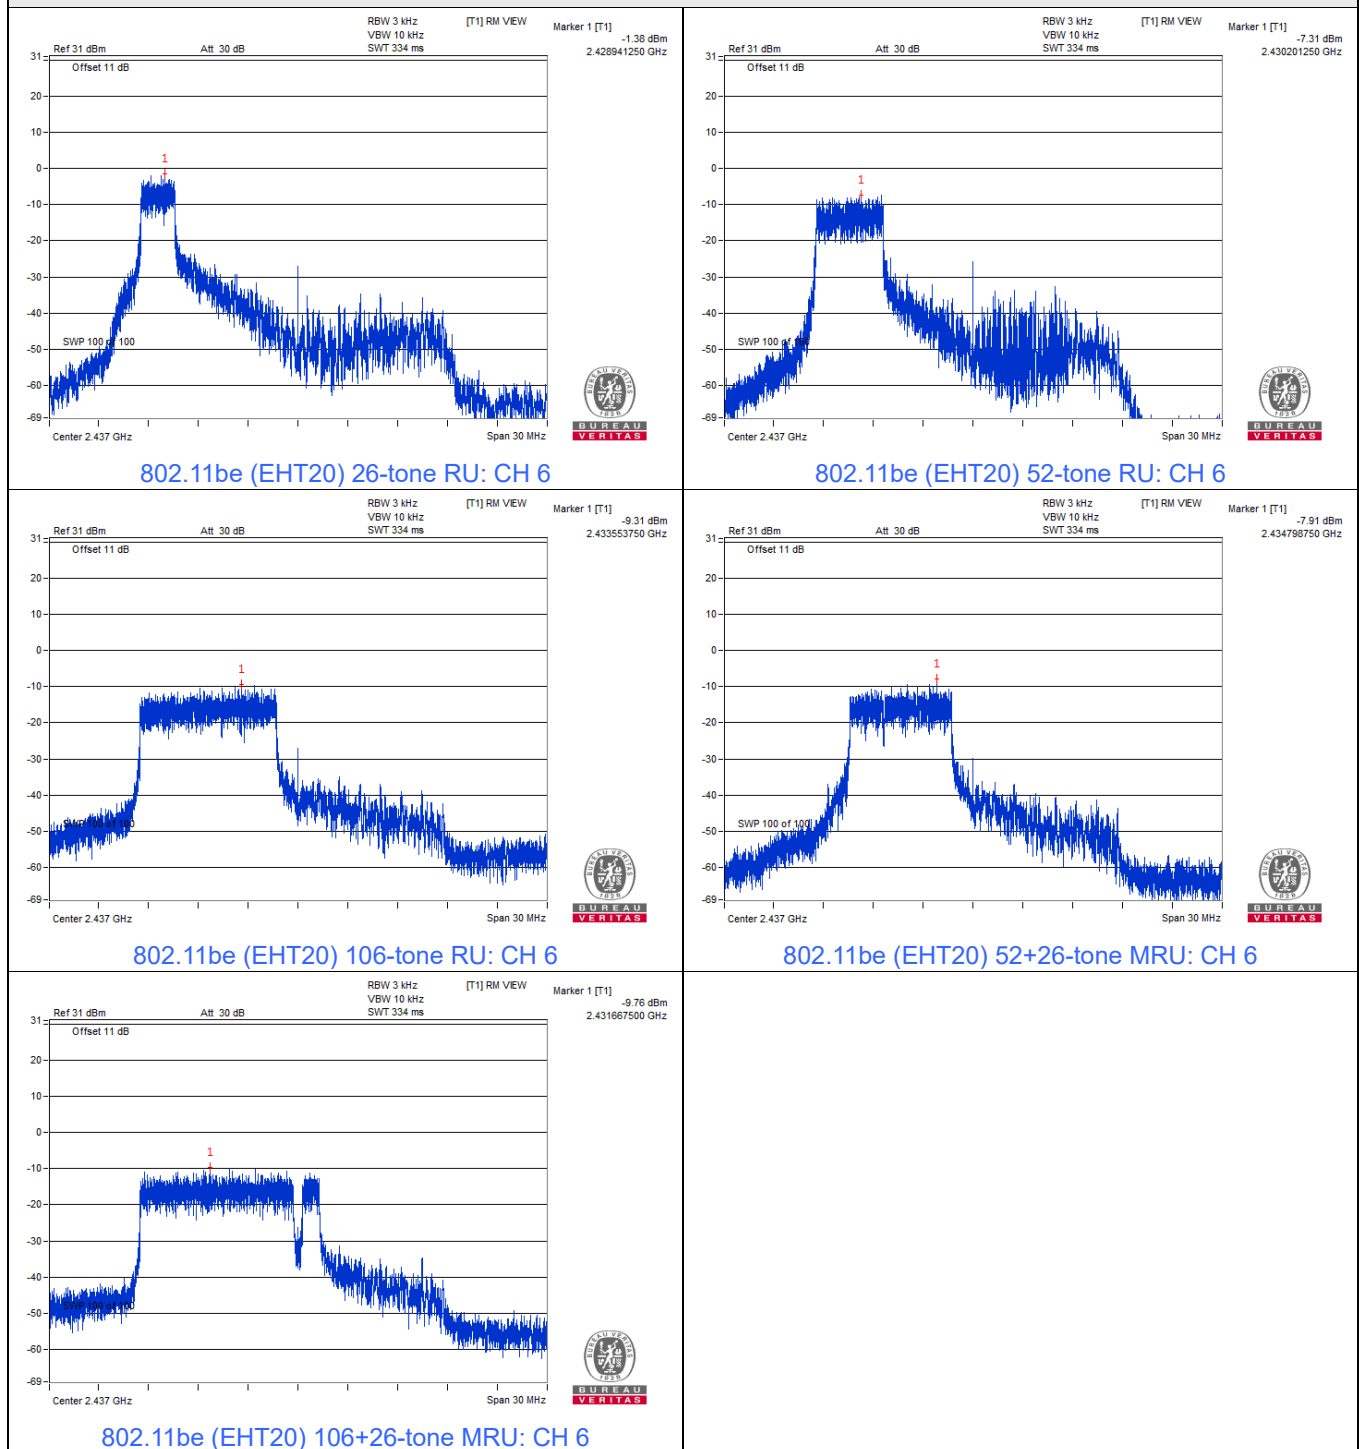

2TX

802.11b

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-9.64	-9.29	-6.45	7.59	Pass
6	2437	-8.83	-8.77	-5.79	7.59	Pass
11	2462	-9.12	-9.12	-6.11	7.59	Pass
12	2467	-15.23	-14.77	-11.98	7.59	Pass
13	2472	-18.21	-18.06	-15.12	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.41 - 6) = 7.59$ dBm/3kHz.

802.11g

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-11.82	-11.64	-8.72	7.59	Pass
2	2417	-11.66	-11.50	-8.57	7.59	Pass
6	2437	-9.09	-8.98	-6.02	7.59	Pass
11	2462	-12.99	-12.87	-9.92	7.59	Pass
12	2467	-13.45	-13.36	-10.39	7.59	Pass
13	2472	-15.42	-14.98	-12.18	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.41 - 6) = 7.59$ dBm/3kHz.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-13.92	-13.68	-10.79	7.59	Pass
6	2437	-10.66	-10.61	-7.62	7.59	Pass
11	2462	-13.10	-12.97	-10.02	7.59	Pass
12	2467	-13.54	-13.61	-10.56	7.59	Pass
13	2472	-14.46	-14.26	-11.35	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8-(6.41-6) = 7.59$ dBm/3kHz.





802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
3	2422	-17.15	-17.03	-14.08	7.59	Pass
6	2437	-16.15	-16.07	-13.10	7.59	Pass
9	2452	-16.90	-16.82	-13.85	7.59	Pass
10	2457	-17.16	-17.03	-14.08	7.59	Pass
11	2462	-18.15	-18.10	-15.11	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8-(6.41-6) = 7.59$ dBm/3kHz.

Spectrum Plot of Maximum Value

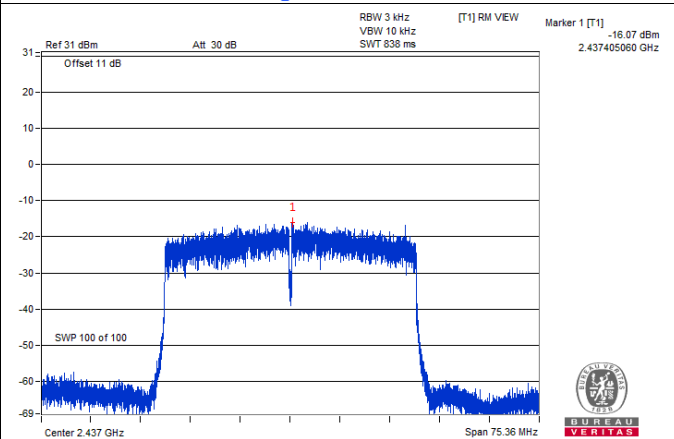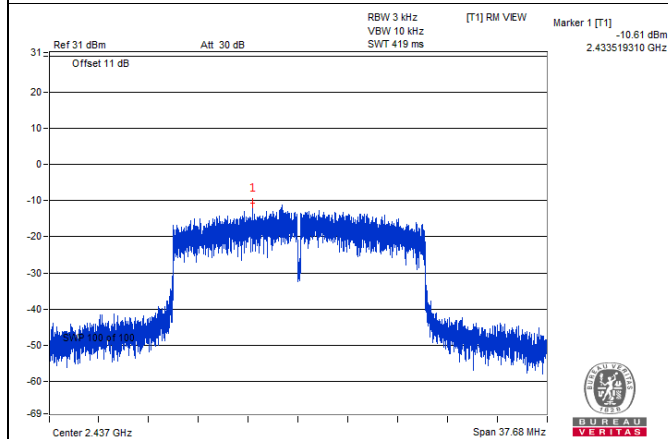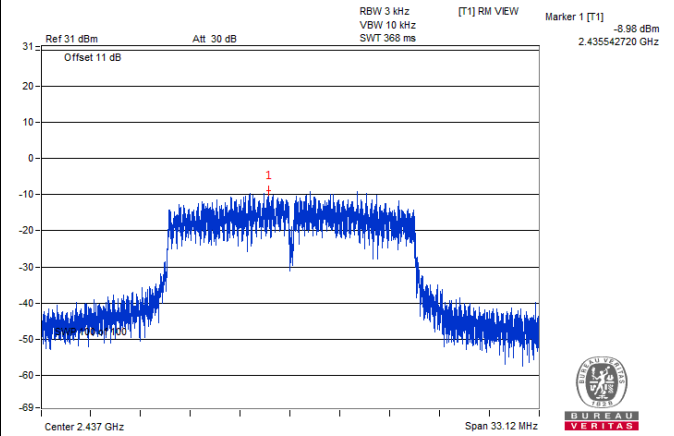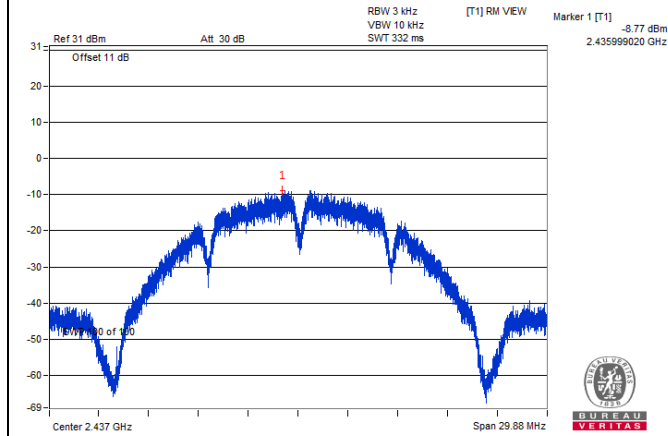

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-7.43	-7.41	-4.41	7.59	Pass
6	2437	-6.40	-6.28	-3.33	7.59	Pass
11	2462	-8.10	-7.93	-5.00	7.59	Pass
12	2467	-8.12	-7.99	-5.04	7.59	Pass
13	2472	-11.11	-10.94	-8.01	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.41 - 6) = 7.59$ dBm/3kHz.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-10.48	-10.40	-7.43	7.59	Pass
6	2437	-8.93	-8.84	-5.87	7.59	Pass
11	2462	-11.24	-11.19	-8.20	7.59	Pass
12	2467	-11.13	-11.01	-8.06	7.59	Pass
13	2472	-12.42	-12.34	-9.37	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.41 - 6) = 7.59$ dBm/3kHz.

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-11.31	-11.12	-8.20	7.59	Pass
6	2437	-9.08	-8.98	-6.02	7.59	Pass
11	2462	-12.73	-12.53	-9.62	7.59	Pass
12	2467	-12.07	-11.98	-9.01	7.59	Pass
13	2472	-14.01	-13.96	-10.97	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8-(6.41-6) = 7.59$ dBm/3kHz.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-11.92	-11.85	-8.87	7.59	Pass
6	2437	-8.32	-8.16	-5.23	7.59	Pass
11	2462	-13.41	-13.26	-10.32	7.59	Pass
12	2467	-13.28	-13.19	-10.22	7.59	Pass
13	2472	-13.35	-13.10	-10.21	7.59	Pass

Notes:


1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8-(6.41-6) = 7.59$ dBm/3kHz.

802.11be (EHT20) 106+26-tone MRU


Chan.	Chan. Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1			
1	2412	-14.48	-14.33	-11.39	7.59	Pass
6	2437	-10.16	-10.01	-7.07	7.59	Pass
11	2462	-15.05	-14.95	-11.99	7.59	Pass
12	2467	-16.65	-16.52	-13.57	7.59	Pass
13	2472	-16.55	-16.40	-13.46	7.59	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. The directional gain is 6.41 dBi > 6 dBi, so the power density limit shall be reduced to $8 - (6.41 - 6) = 7.59$ dBm/3kHz.

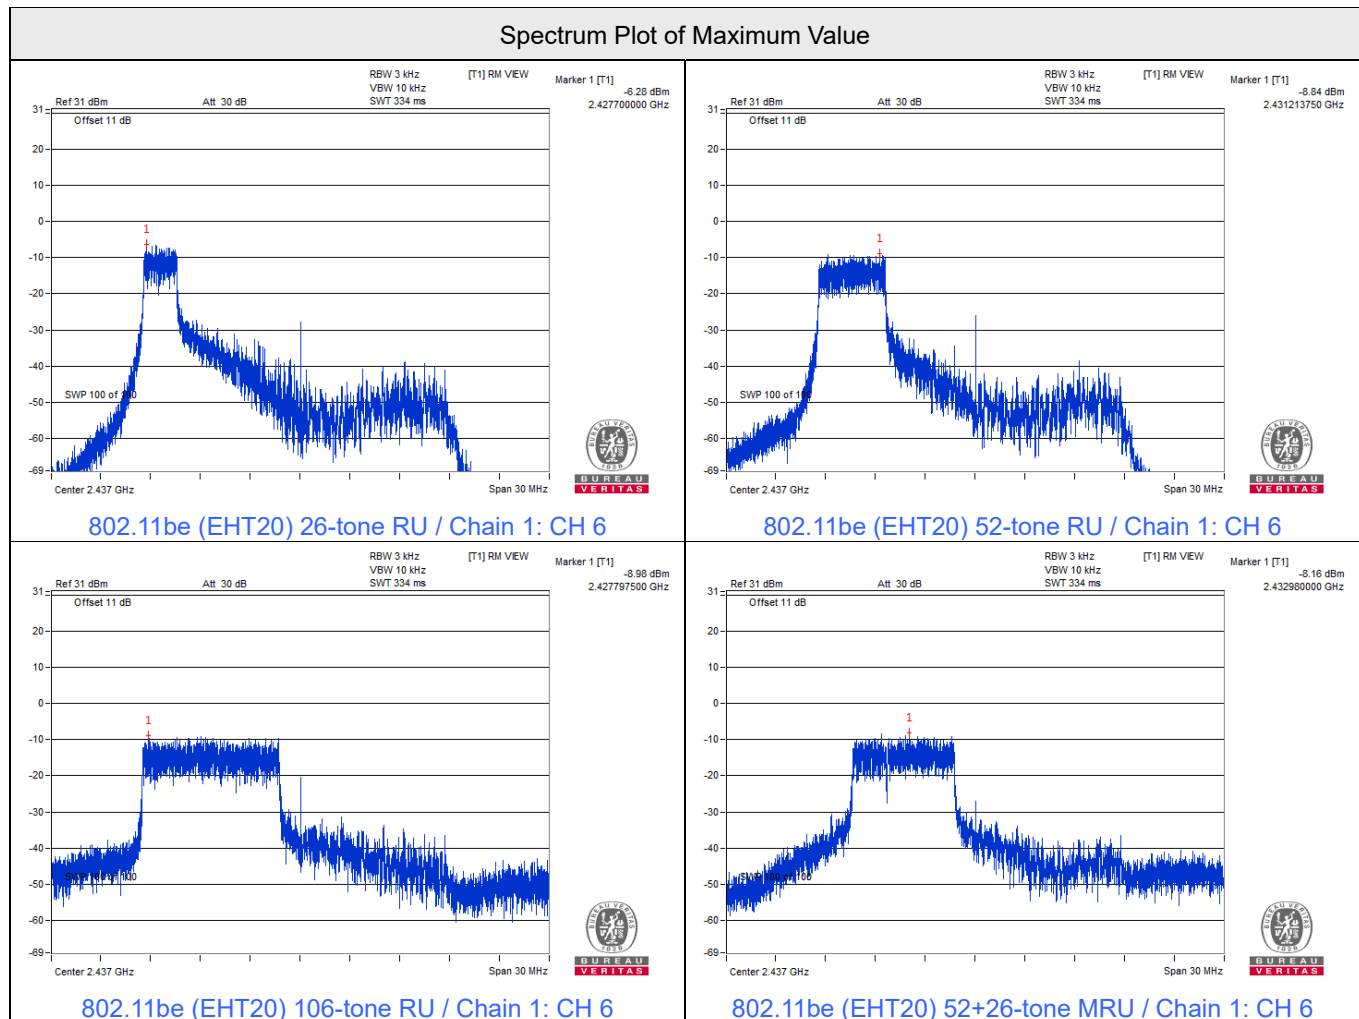

Spectrum Plot of Maximum Value

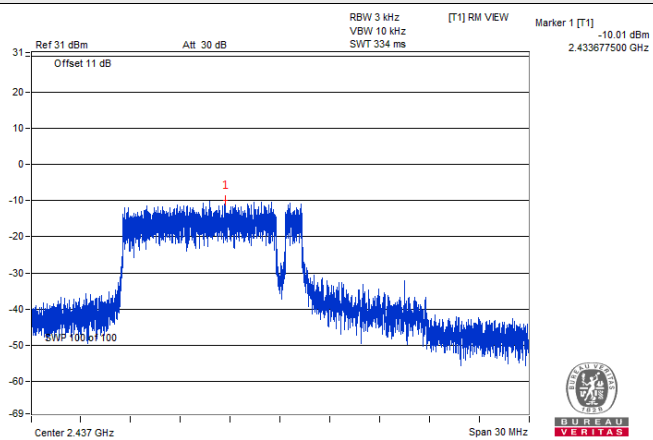

802.11be (EHT20) 106+26-tone MRU / Chain 1: CH 6

7.3 6 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
---------------------------	--------------	------------	-----------

1TX

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	9.27	0.5	Pass
6	2437	9.68	0.5	Pass
11	2462	9.68	0.5	Pass
12	2467	9.27	0.5	Pass
13	2472	9.25	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	16.09	0.5	Pass
2	2417	16.27	0.5	Pass
6	2437	16.24	0.5	Pass
11	2462	16.15	0.5	Pass
12	2467	16.13	0.5	Pass
13	2472	16.06	0.5	Pass


802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	18.84	0.5	Pass
6	2437	18.91	0.5	Pass
11	2462	18.91	0.5	Pass
12	2467	18.99	0.5	Pass
13	2472	18.86	0.5	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
3	2422	37.79	0.5	Pass
6	2437	37.55	0.5	Pass
9	2452	36.2	0.5	Pass
10	2457	37.74	0.5	Pass
11	2462	31.18	0.5	Pass

Spectrum Plot of Minimum Value

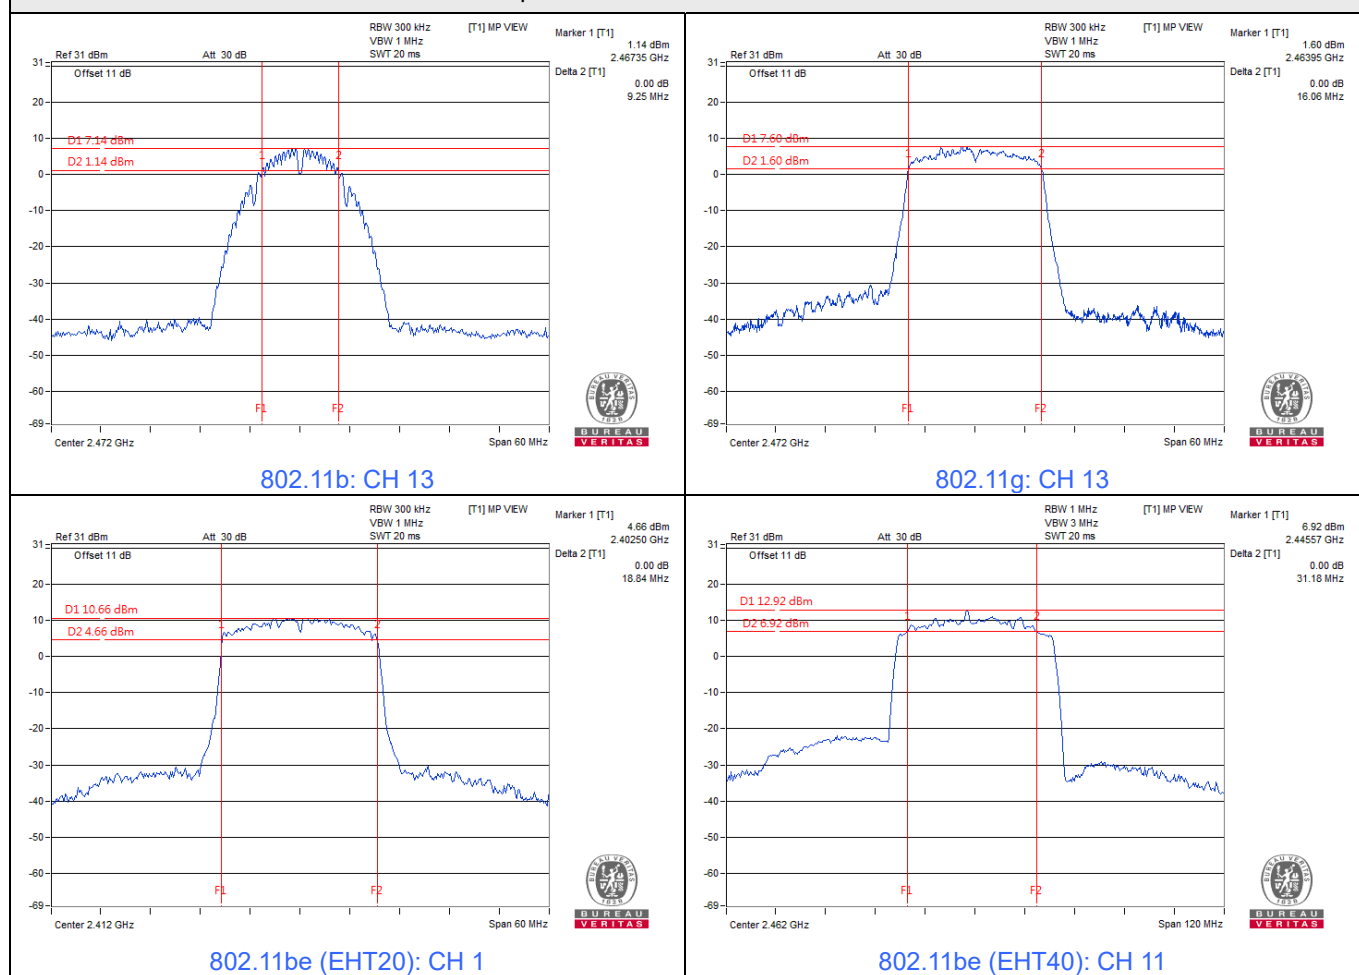

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	2.18	0.5	Pass
6	2437	14.63	0.5	Pass
11	2462	2.1	0.5	Pass
12	2467	2.18	0.5	Pass
13	2472	2.16	0.5	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	17.13	0.5	Pass
6	2437	17.15	0.5	Pass
11	2462	17.14	0.5	Pass
12	2467	17.11	0.5	Pass
13	2472	17.11	0.5	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	17.27	0.5	Pass
6	2437	17.24	0.5	Pass
11	2462	17.23	0.5	Pass
12	2467	17.19	0.5	Pass
13	2472	17.24	0.5	Pass


802.11be (EHT20) 52+26-tone MRU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	15.22	0.5	Pass
6	2437	15.24	0.5	Pass
11	2462	15.22	0.5	Pass
12	2467	15.23	0.5	Pass
13	2472	15.2	0.5	Pass

802.11be (EHT20) 106+26-tone MRU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
1	2412	17.42	0.5	Pass
6	2437	17.23	0.5	Pass
11	2462	17.24	0.5	Pass
12	2467	17.28	0.5	Pass
13	2472	17.27	0.5	Pass

Spectrum Plot of Minimum Value

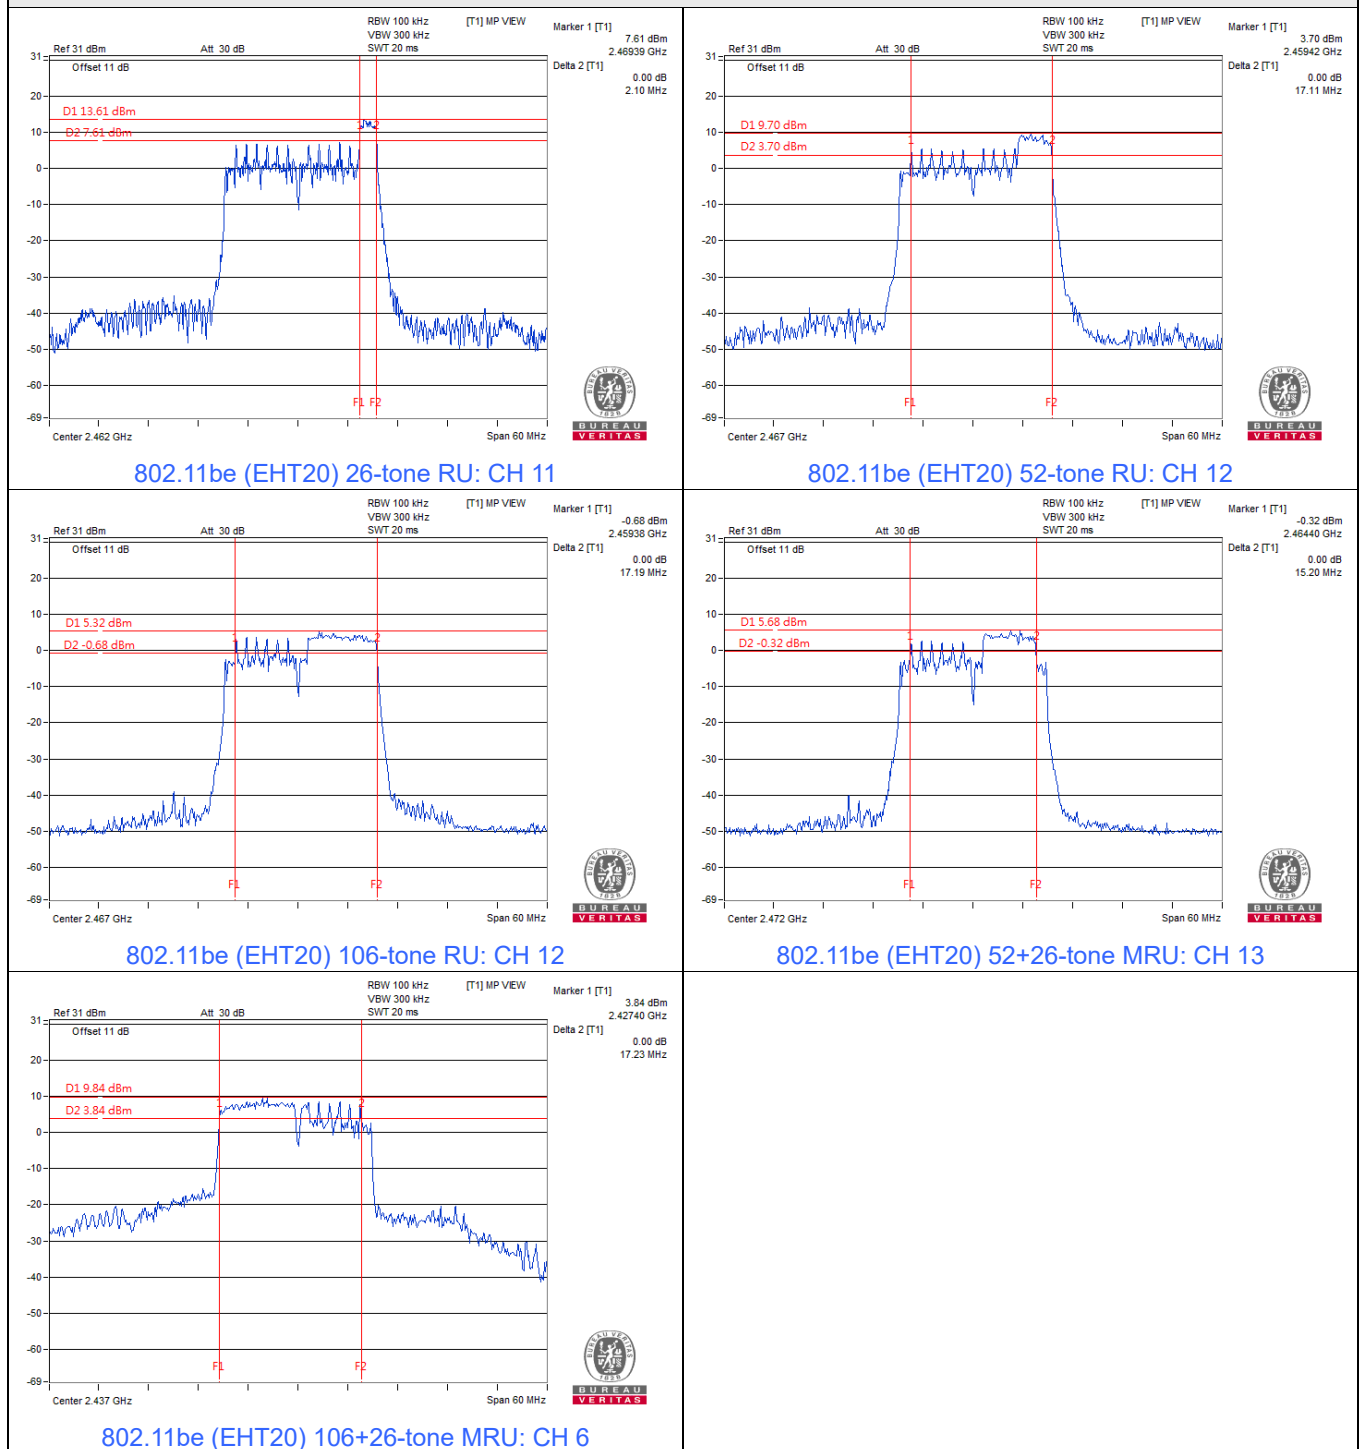

2TX

802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	9.31	9.33	0.5	Pass
6	2437	10.21	10.19	0.5	Pass
11	2462	10.17	10.15	0.5	Pass
12	2467	9.25	9.24	0.5	Pass
13	2472	9.25	9.25	0.5	Pass

802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	16.37	16.37	0.5	Pass
2	2417	16.27	16.27	0.5	Pass
6	2437	16.22	16.20	0.5	Pass
11	2462	16.27	16.28	0.5	Pass
12	2467	16.14	16.15	0.5	Pass
13	2472	16.14	16.16	0.5	Pass


802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	19.00	19.01	0.5	Pass
6	2437	18.95	18.94	0.5	Pass
11	2462	18.21	18.39	0.5	Pass
12	2467	18.24	18.22	0.5	Pass
13	2472	18.66	18.65	0.5	Pass


802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	2422	37.63	37.46	0.5	Pass
6	2437	37.29	37.27	0.5	Pass
9	2452	37.28	37.31	0.5	Pass
10	2457	37.21	37.23	0.5	Pass
11	2462	37.44	37.47	0.5	Pass


Spectrum Plot of Minimum Value

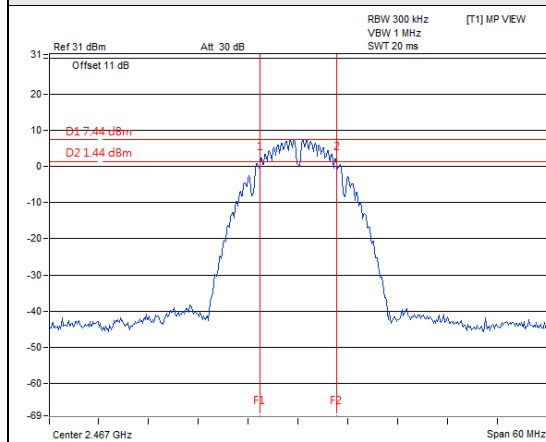


802.11b / Chain 1: CH 12

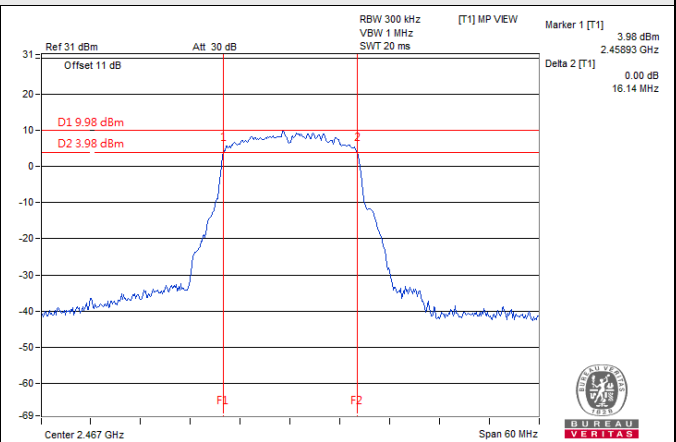

802.11g / Chain 0: CH 12

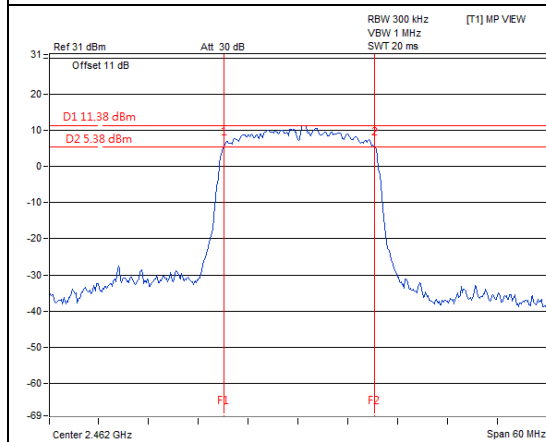

802.11be (EHT20) / Chain 0: CH 11

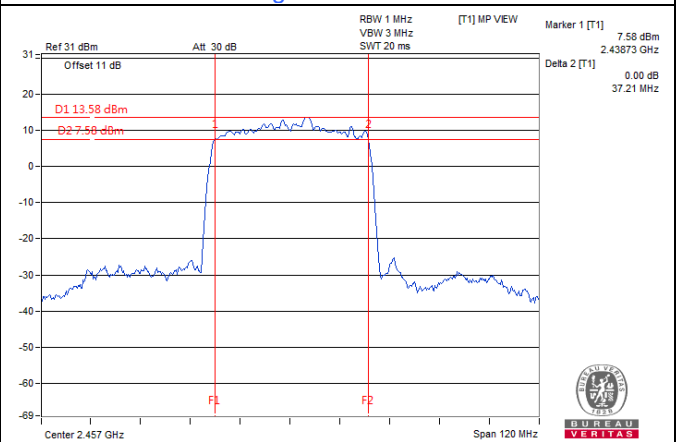

802.11be (EHT40) / Chain 0: CH 10

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	2.21	2.19	0.5	Pass
6	2437	2.20	2.19	0.5	Pass
11	2462	2.22	2.12	0.5	Pass
12	2467	2.21	2.21	0.5	Pass
13	2472	2.19	2.19	0.5	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	17.14	17.15	0.5	Pass
6	2437	17.07	17.07	0.5	Pass
11	2462	17.12	17.11	0.5	Pass
12	2467	17.13	17.13	0.5	Pass
13	2472	17.11	17.16	0.5	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	17.19	17.18	0.5	Pass
6	2437	17.16	17.21	0.5	Pass
11	2462	17.27	17.25	0.5	Pass
12	2467	17.25	17.26	0.5	Pass
13	2472	17.22	17.23	0.5	Pass


802.11be (EHT20) 52+26-tone MRU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	15.22	15.23	0.5	Pass
6	2437	15.25	15.31	0.5	Pass
11	2462	15.22	15.24	0.5	Pass
12	2467	15.22	15.21	0.5	Pass
13	2472	15.23	15.24	0.5	Pass

802.11be (EHT20) 106+26-tone MRU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	17.30	17.43	0.5	Pass
6	2437	18.39	18.38	0.5	Pass
11	2462	17.22	17.22	0.5	Pass
12	2467	17.23	17.25	0.5	Pass
13	2472	17.26	17.25	0.5	Pass


Spectrum Plot of Minimum Value

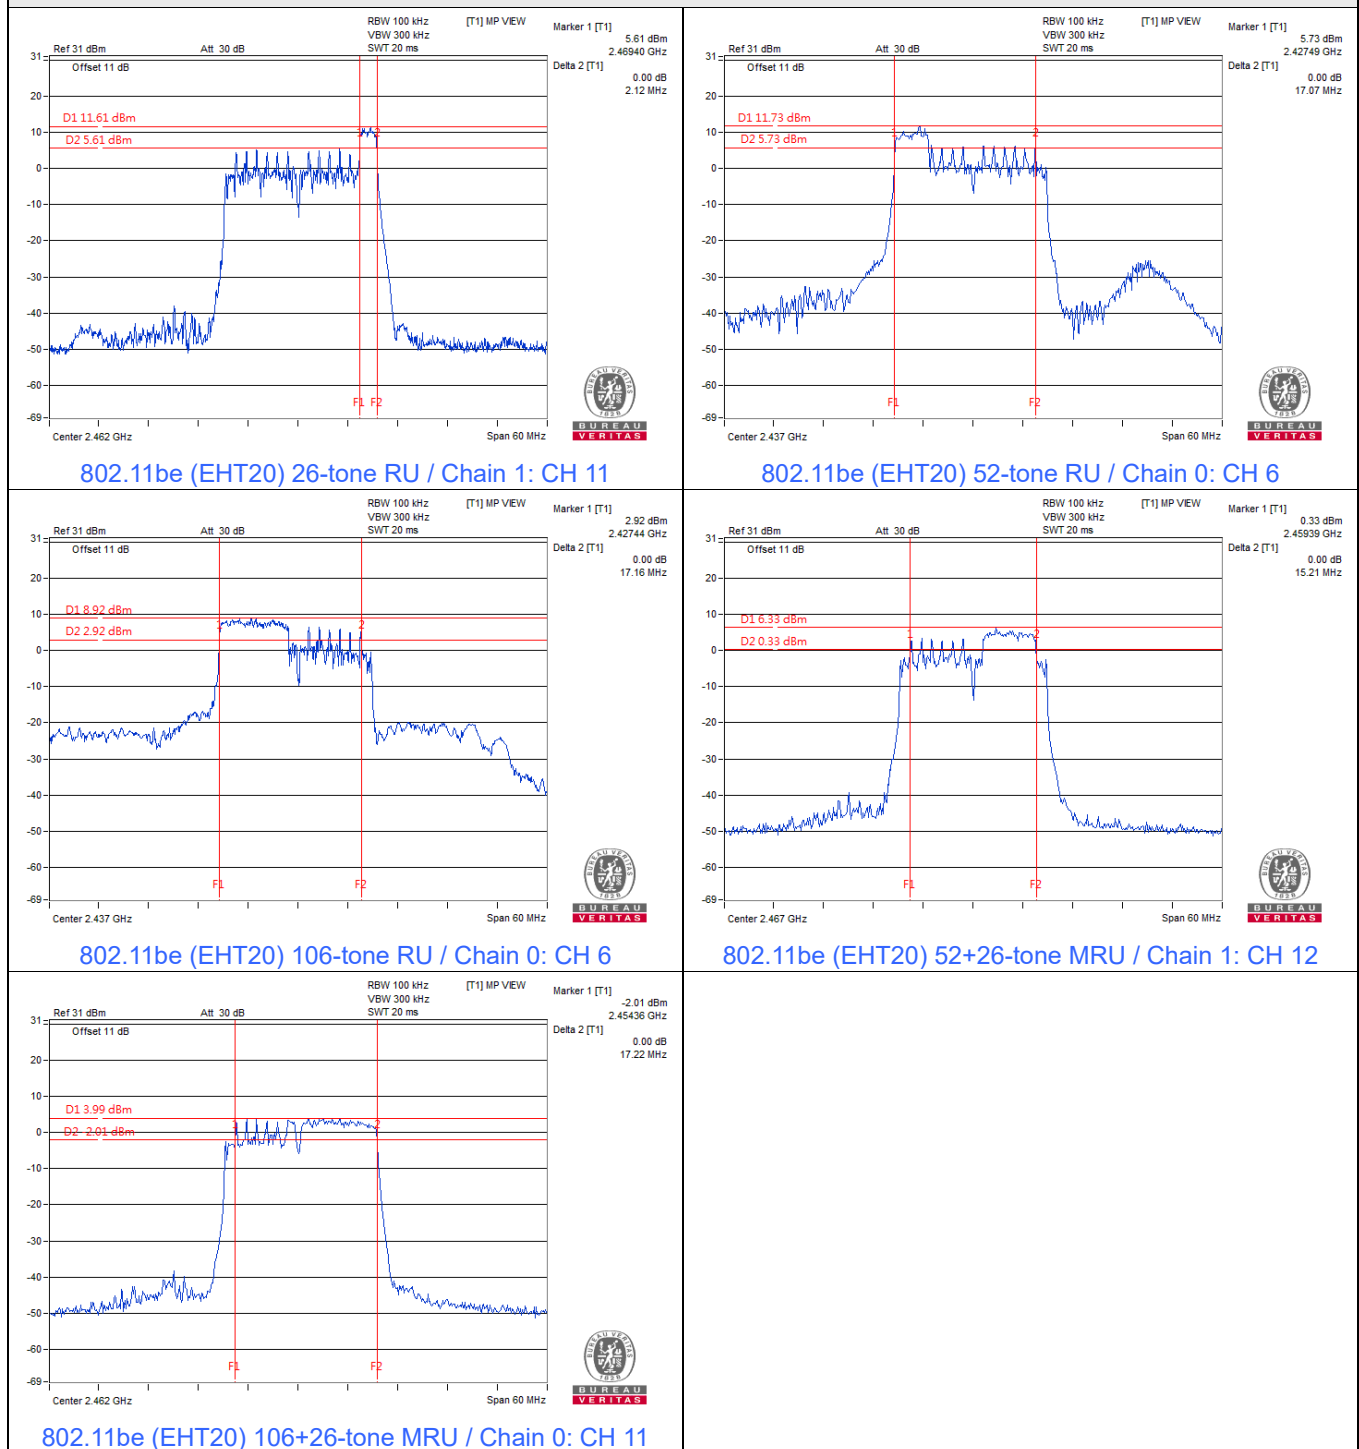


7.4 Conducted Out of Band Emissions


Environmental Conditions:	25°C, 60% RH	Tested By:	Wayne Lin
---------------------------	--------------	------------	-----------


1TX
802.11b

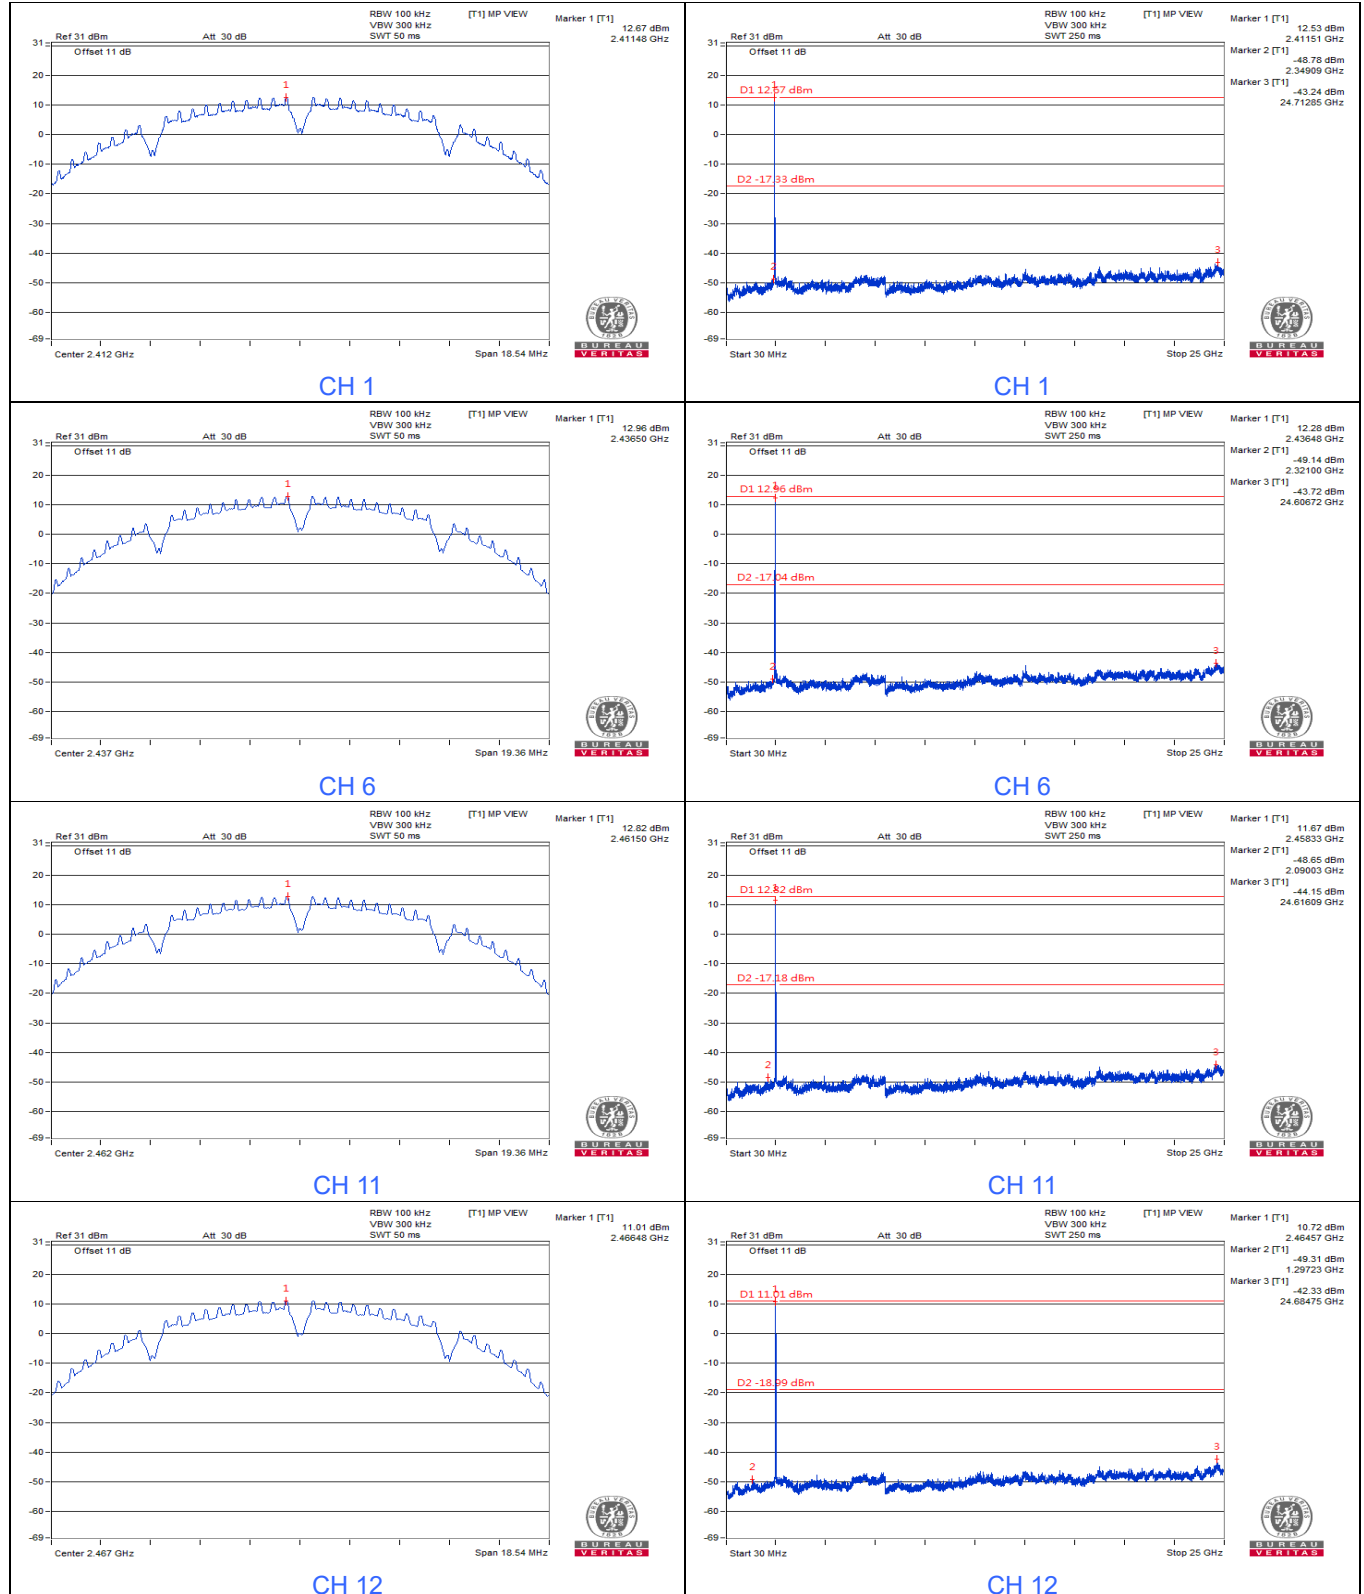


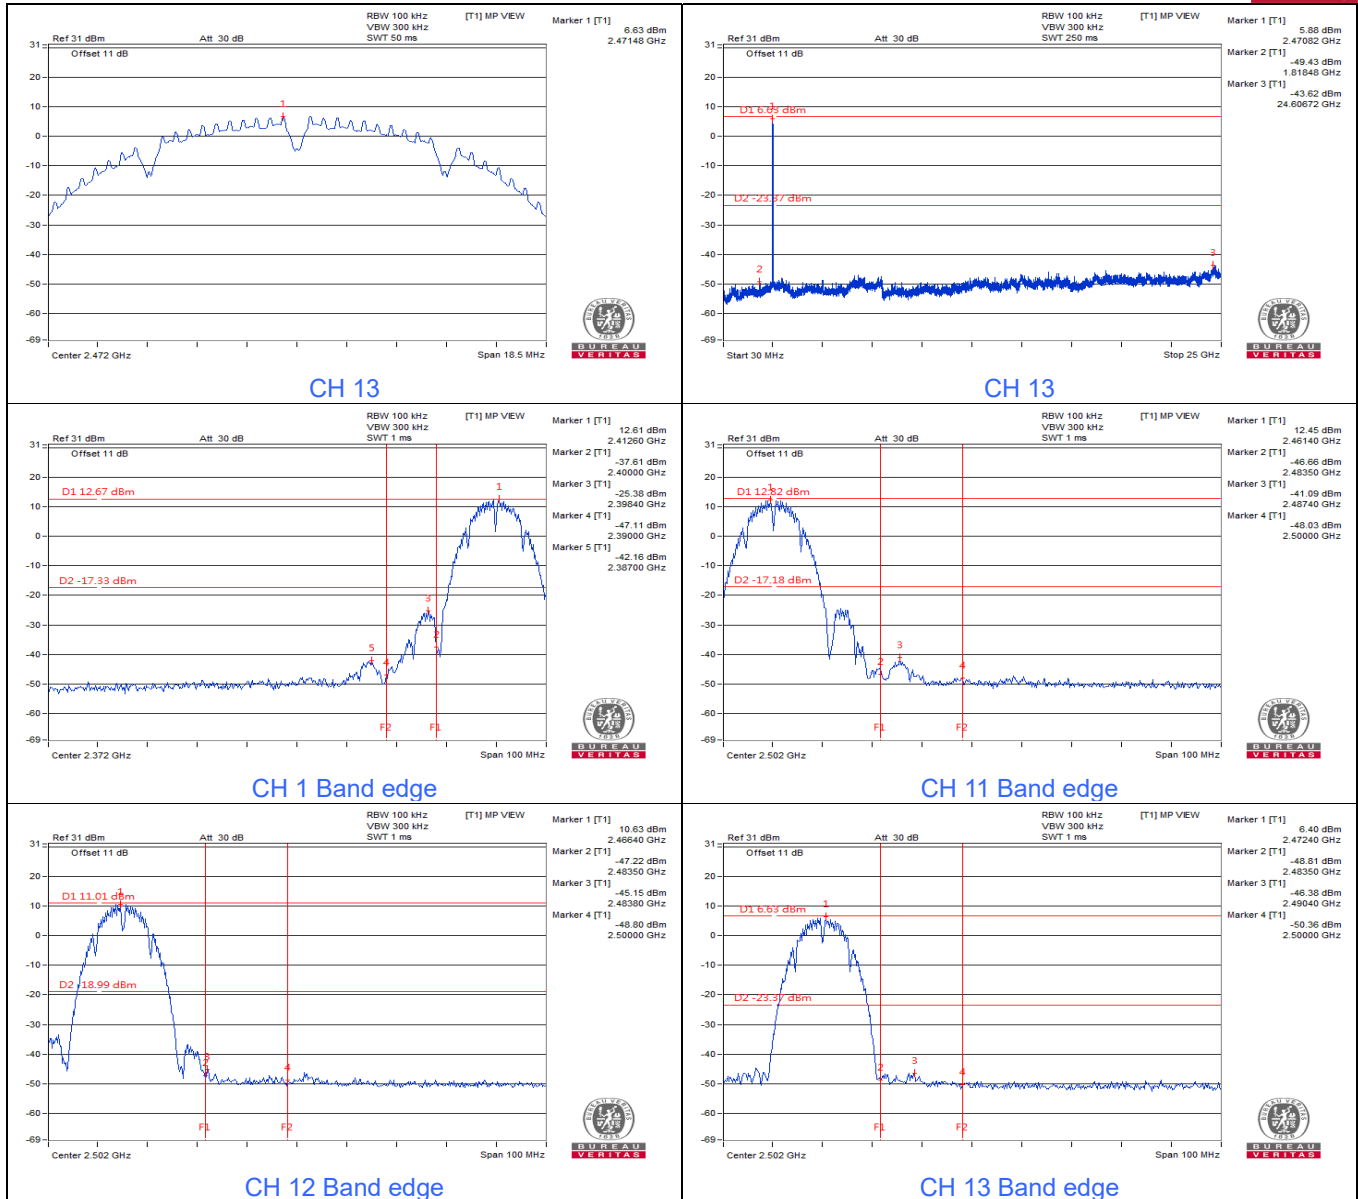


802.11g






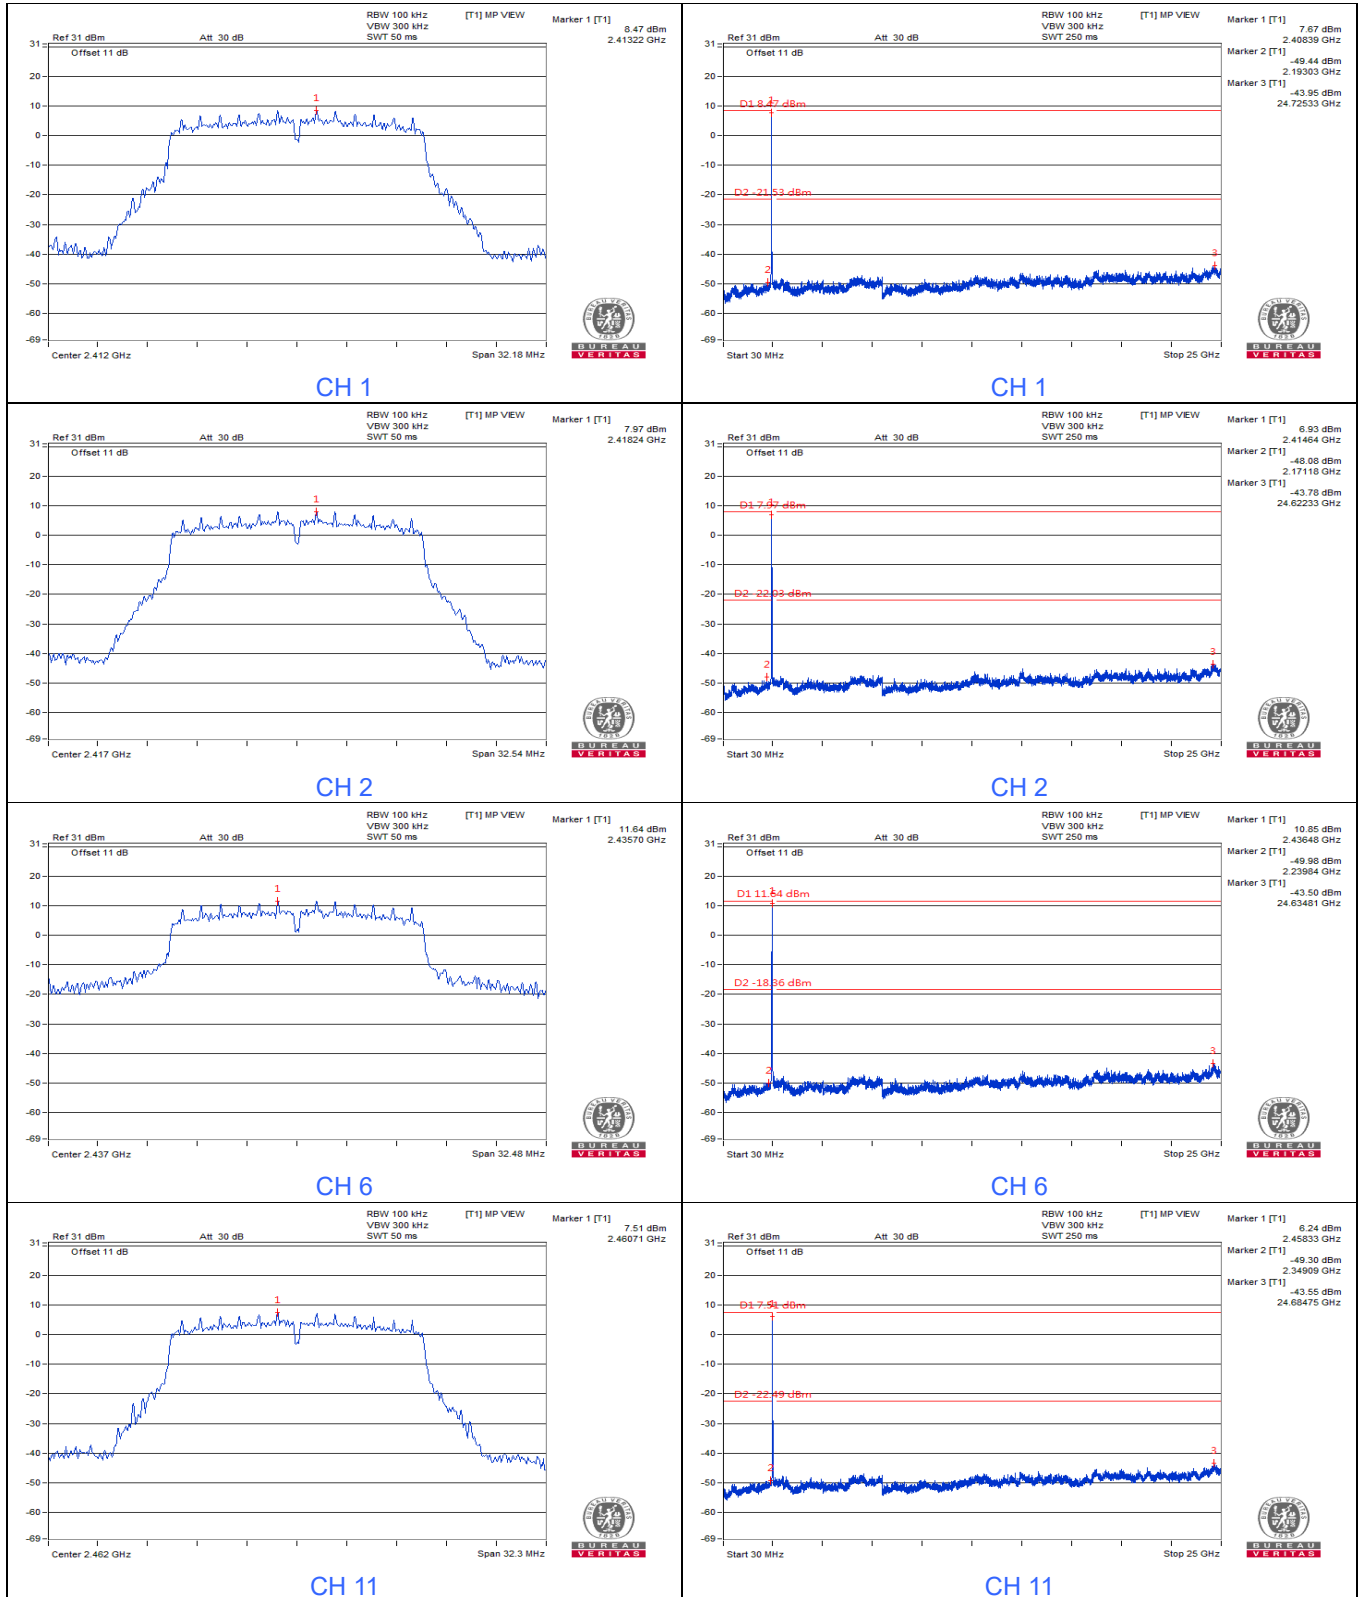


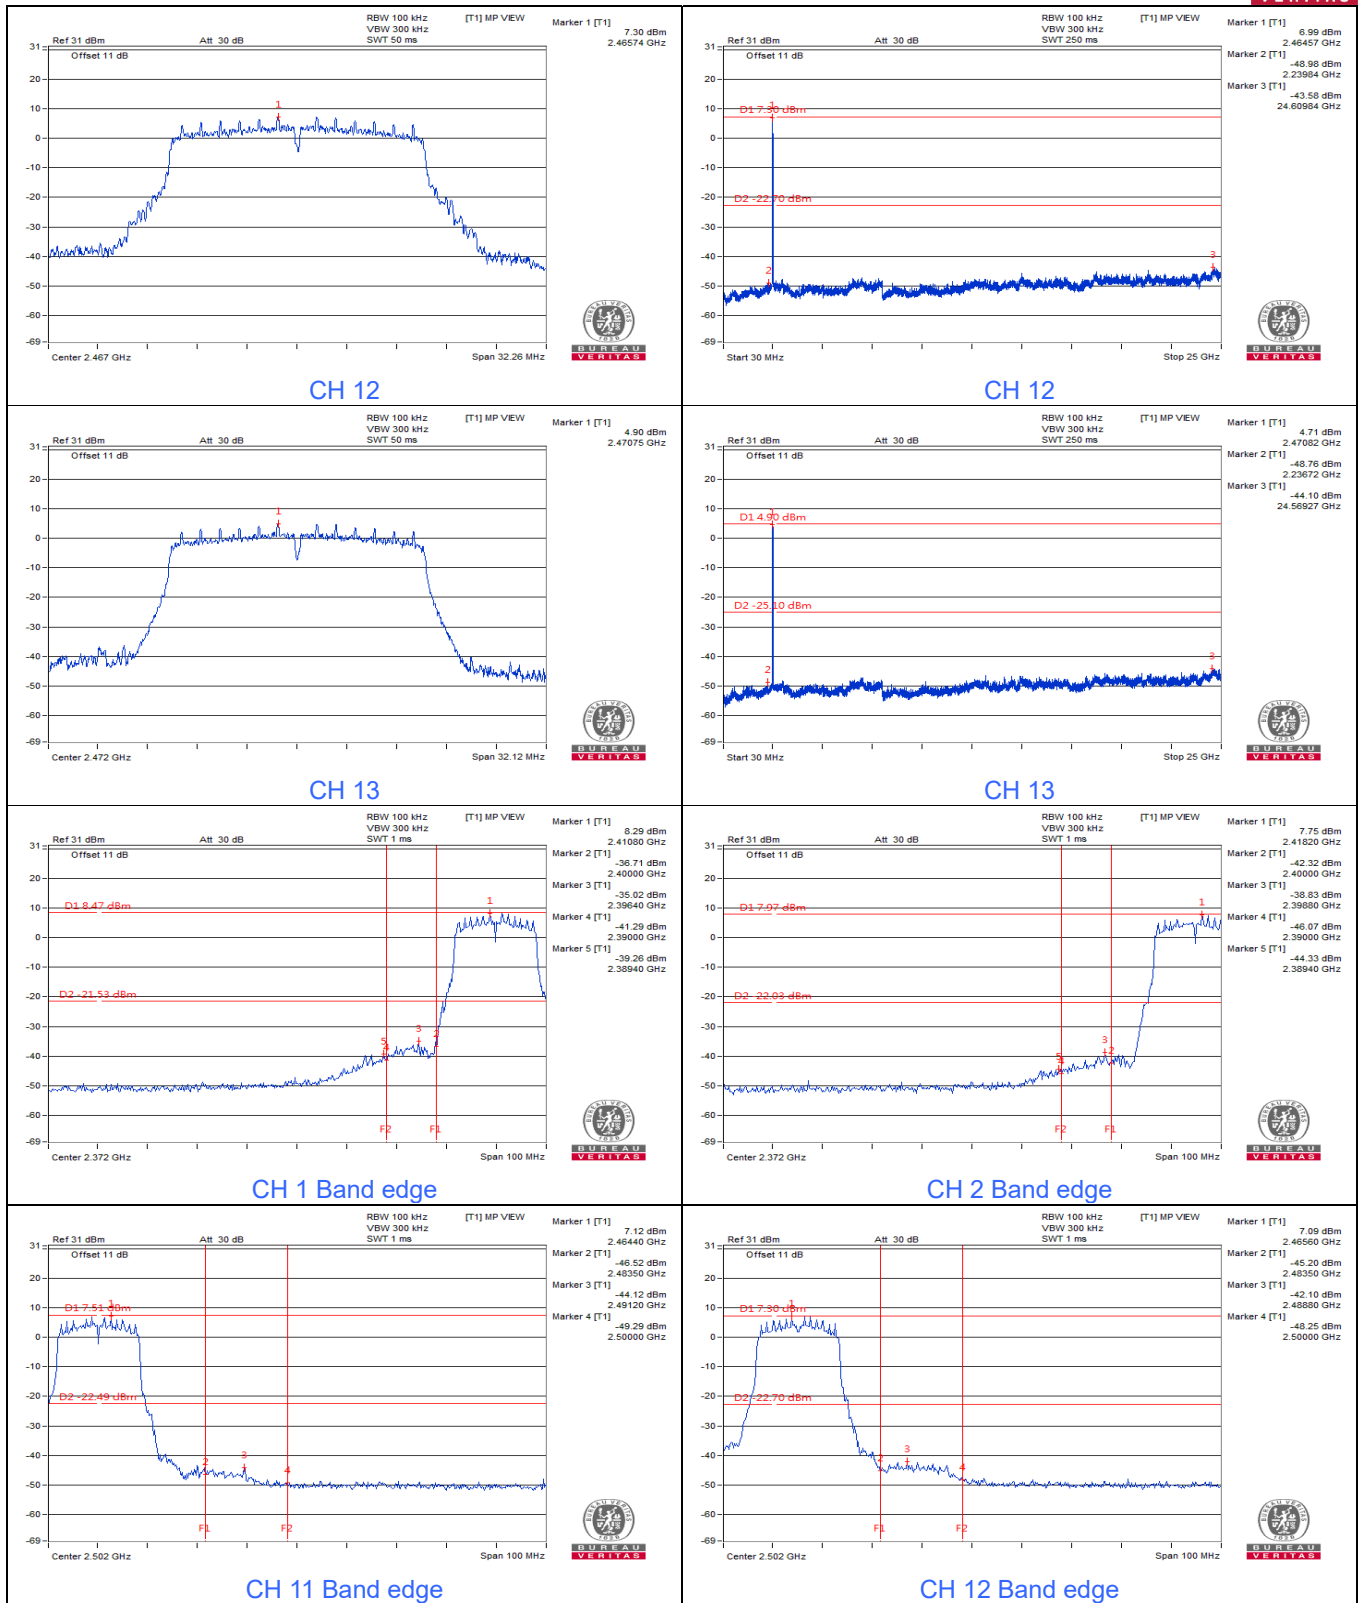

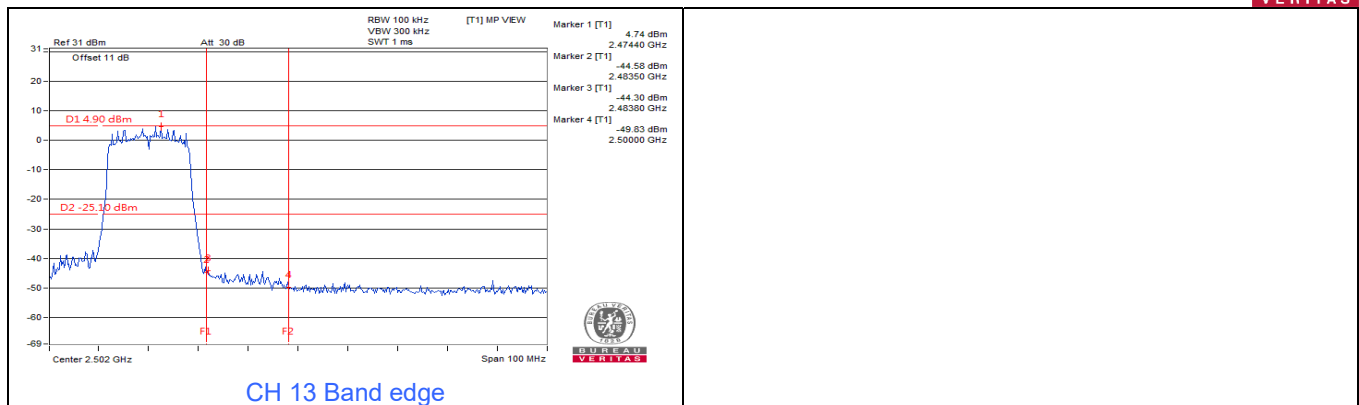








802.11be (EHT20)

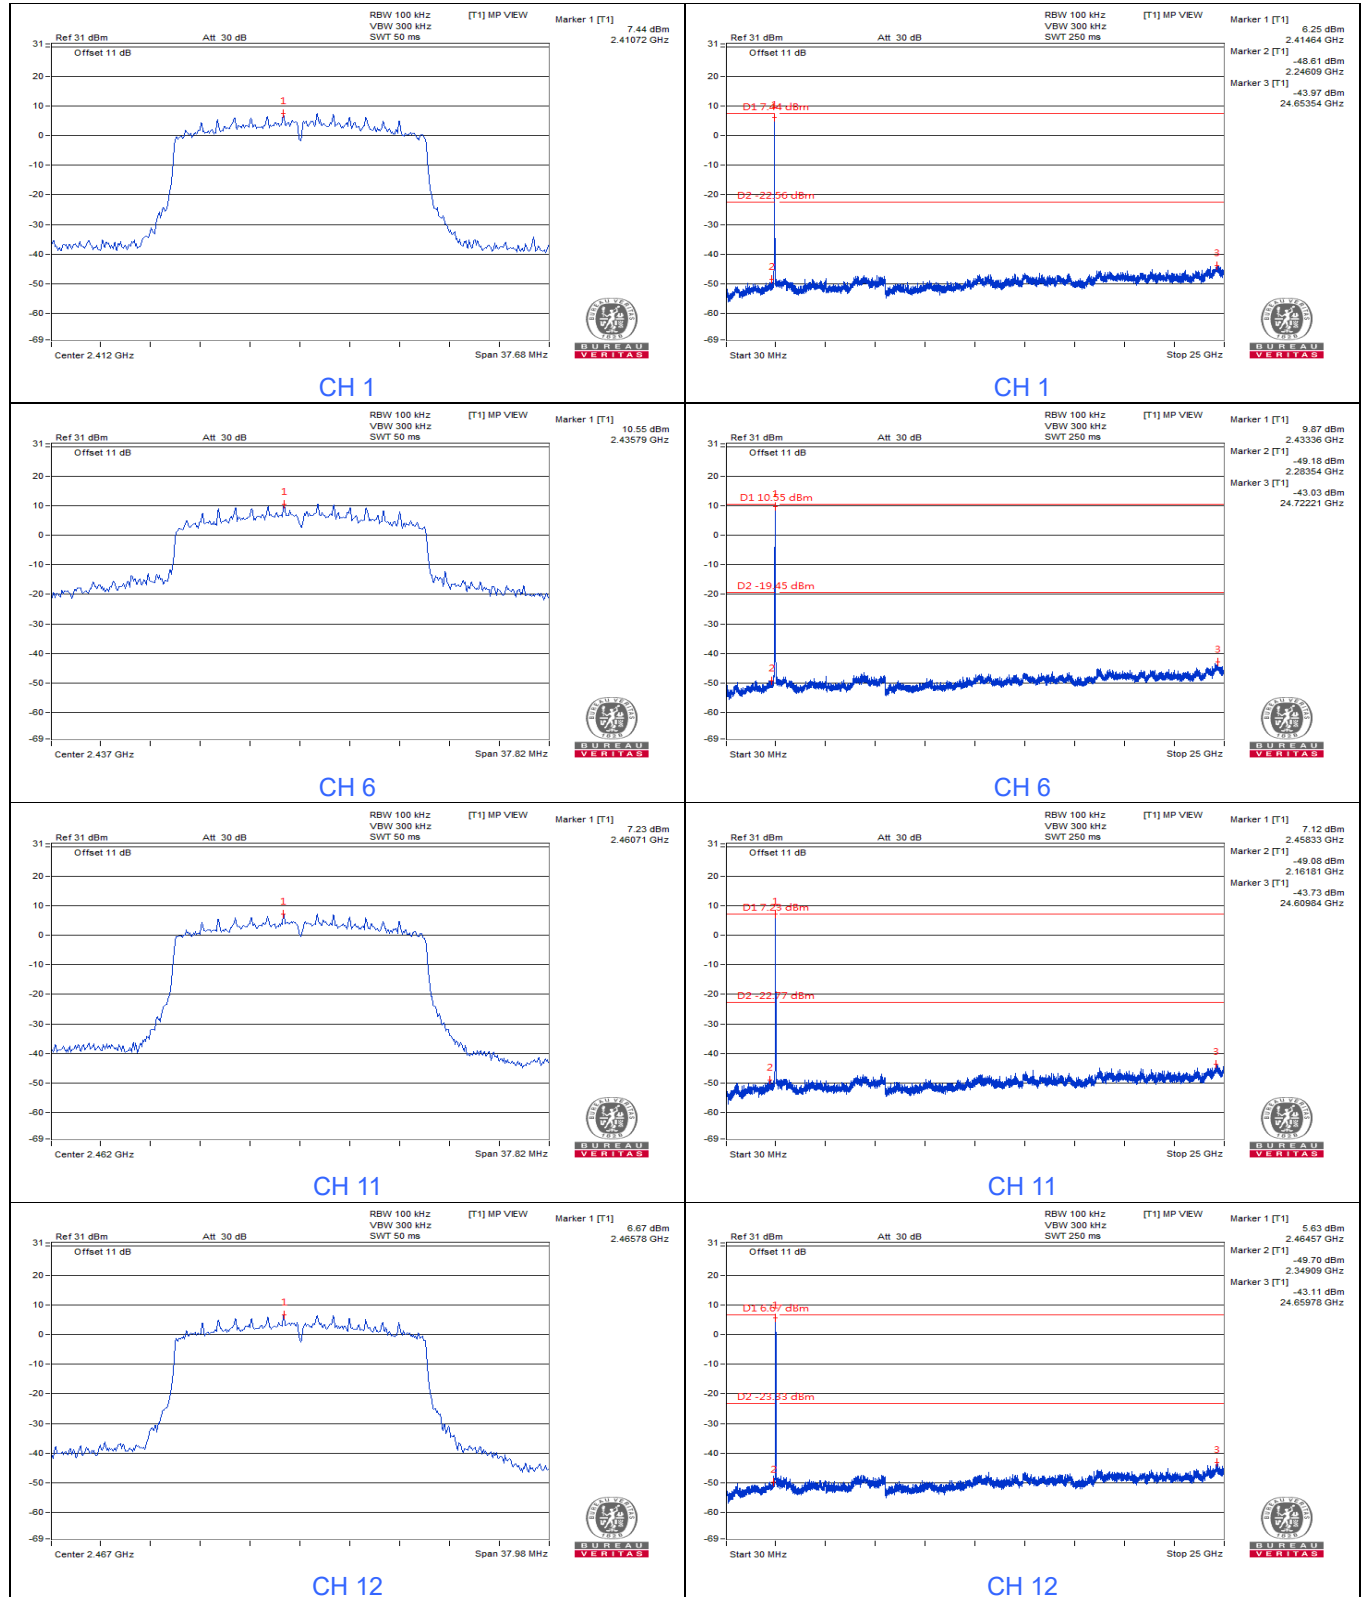

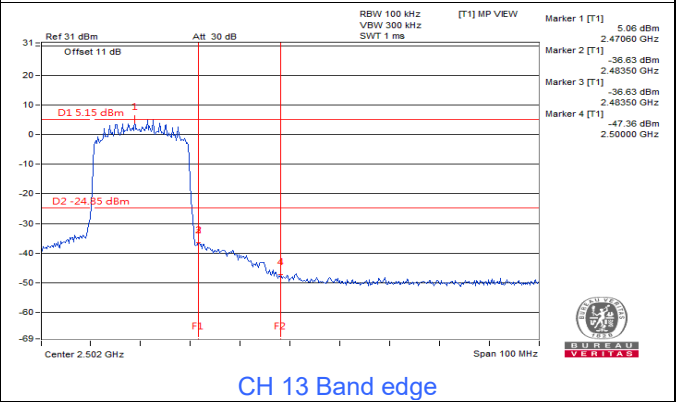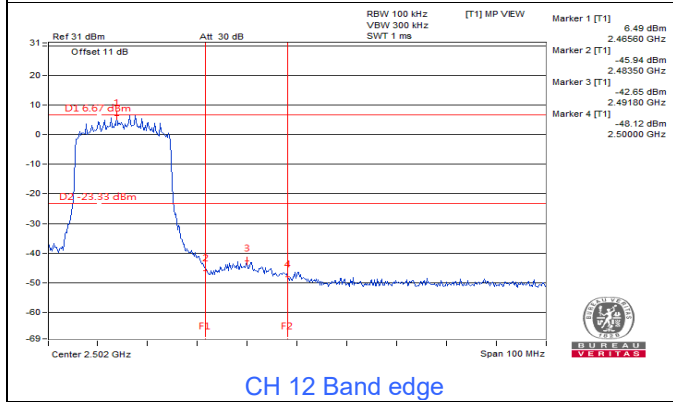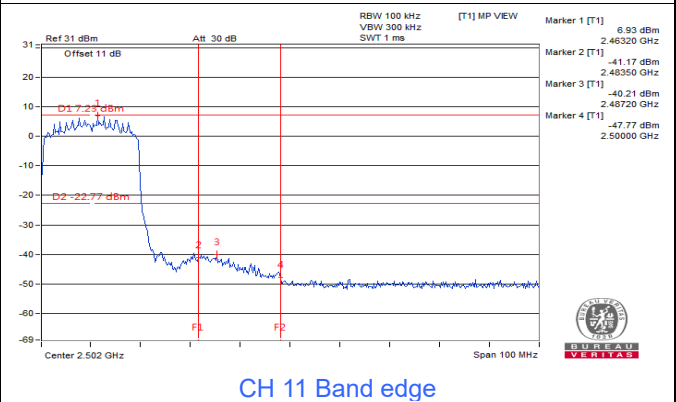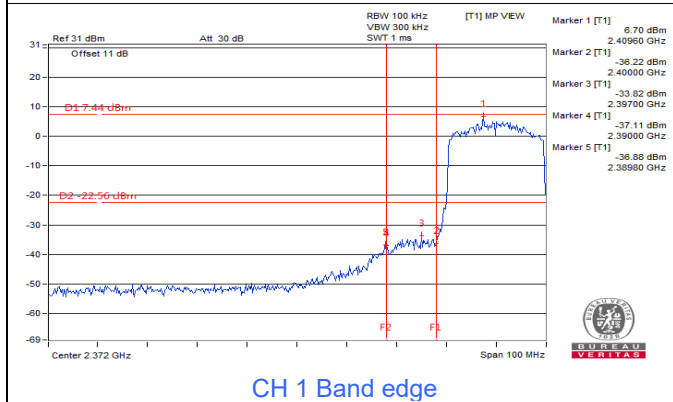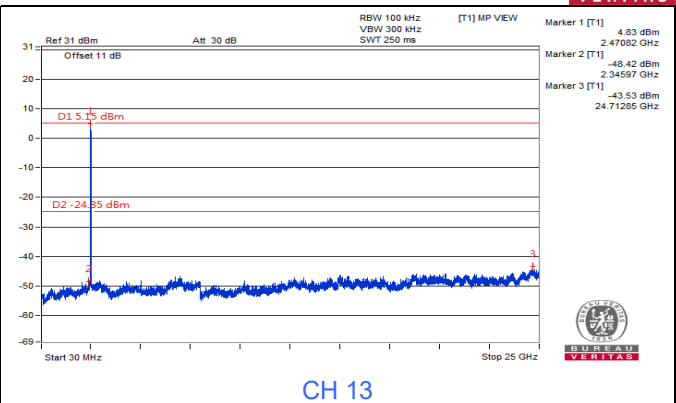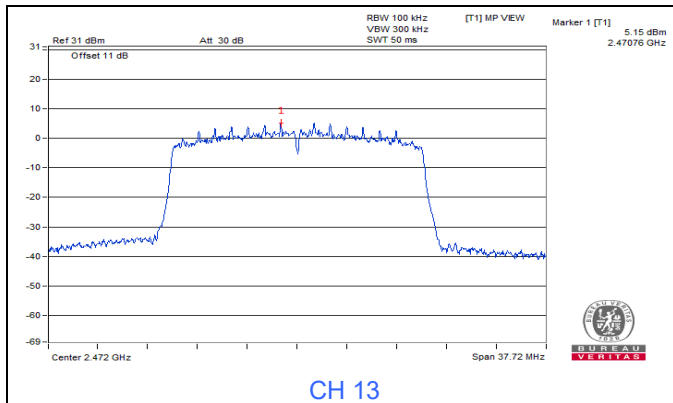



802.11be (EHT40)

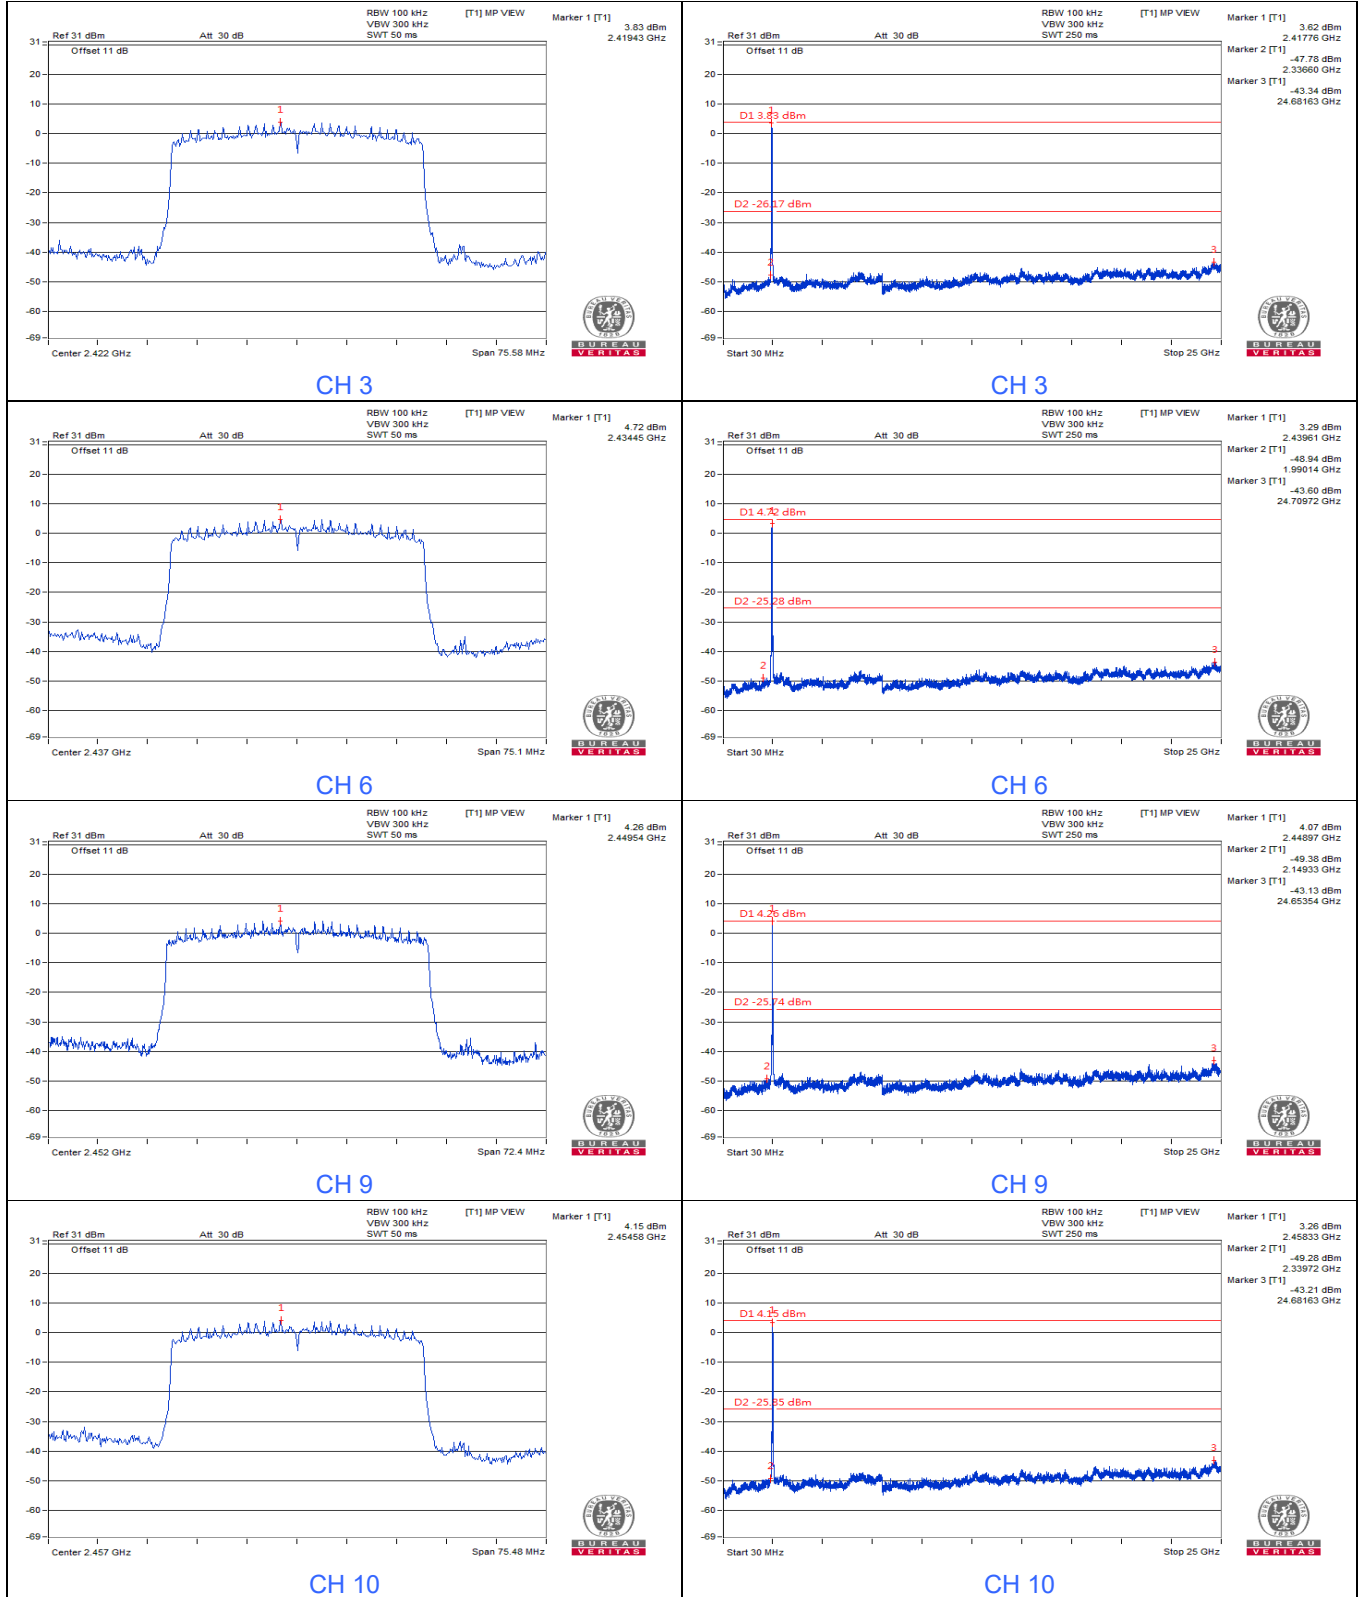

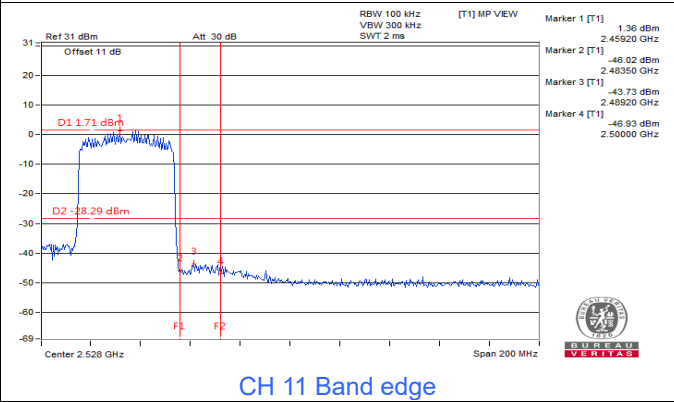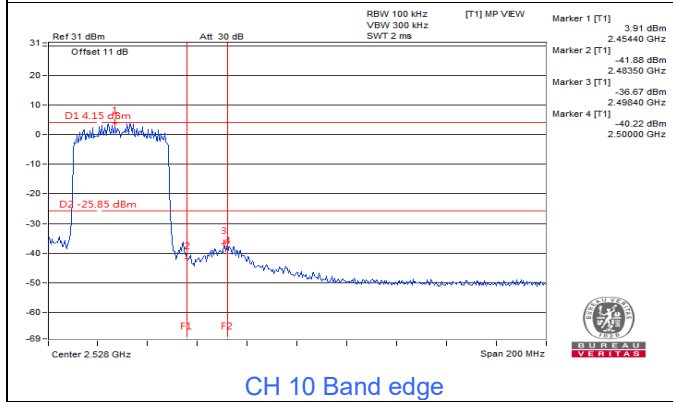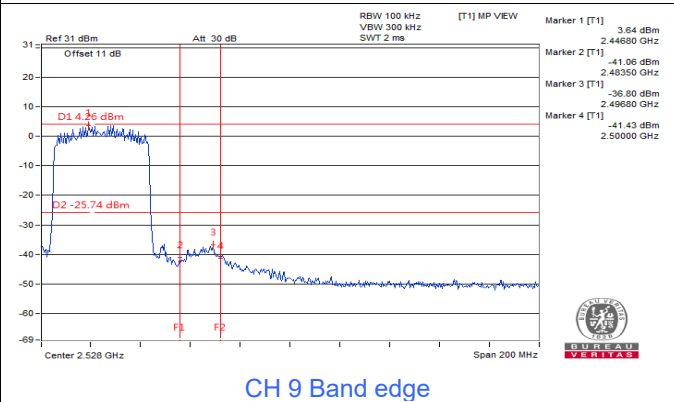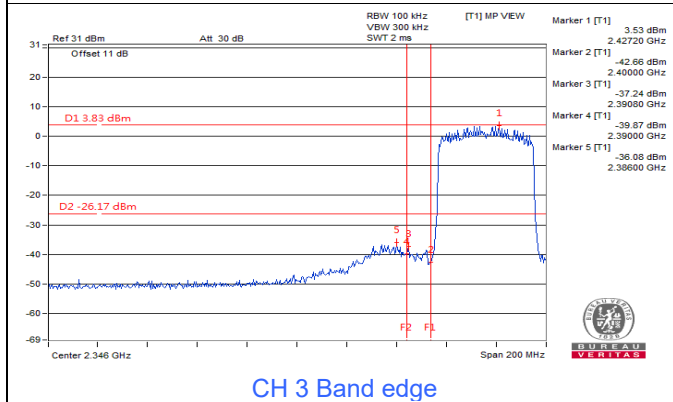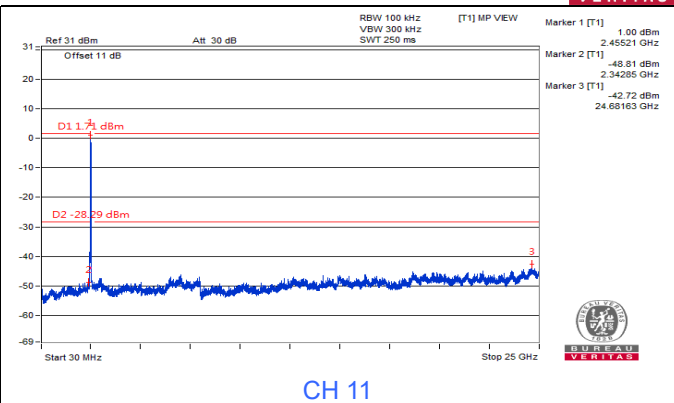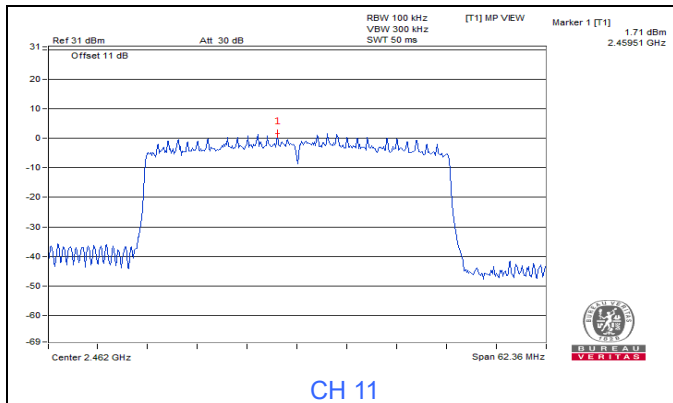



802.11be (EHT20) 26-tone RU

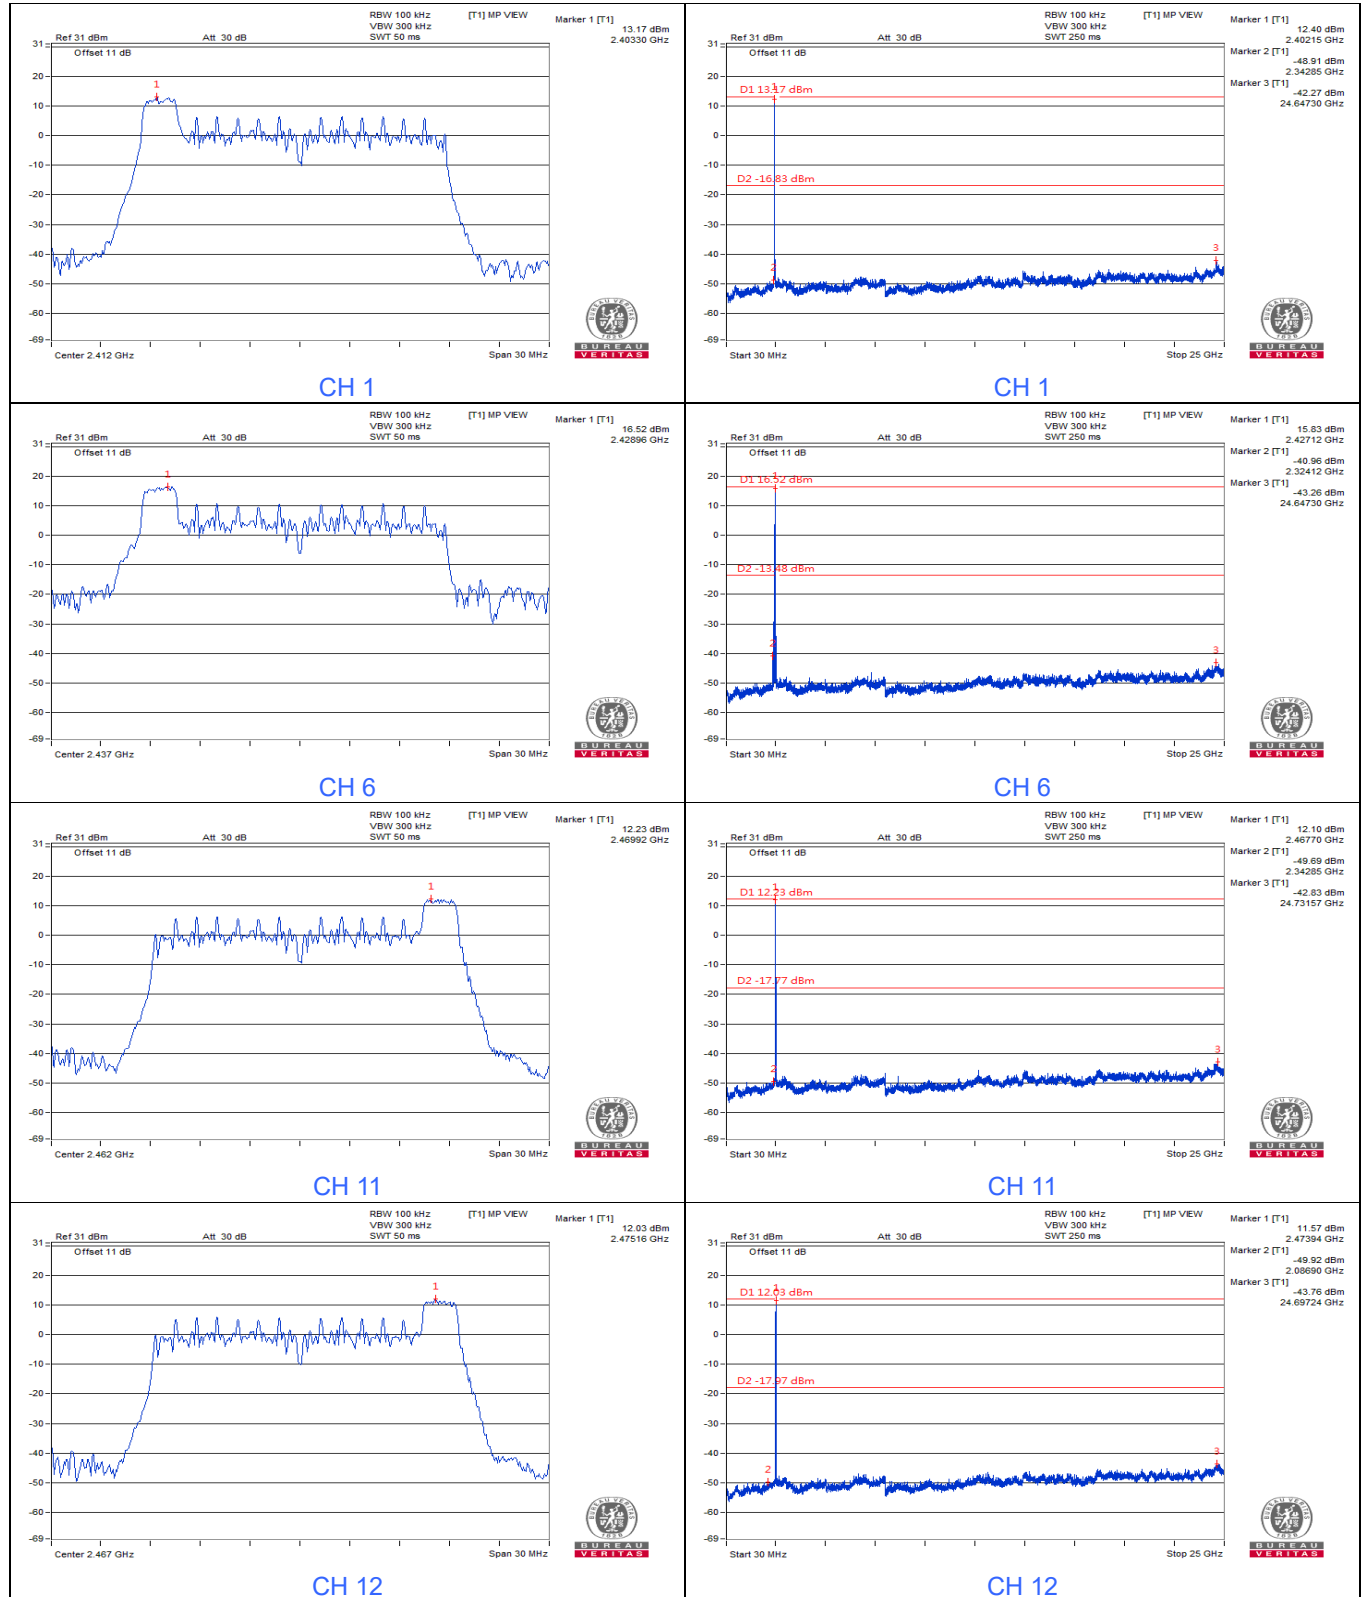

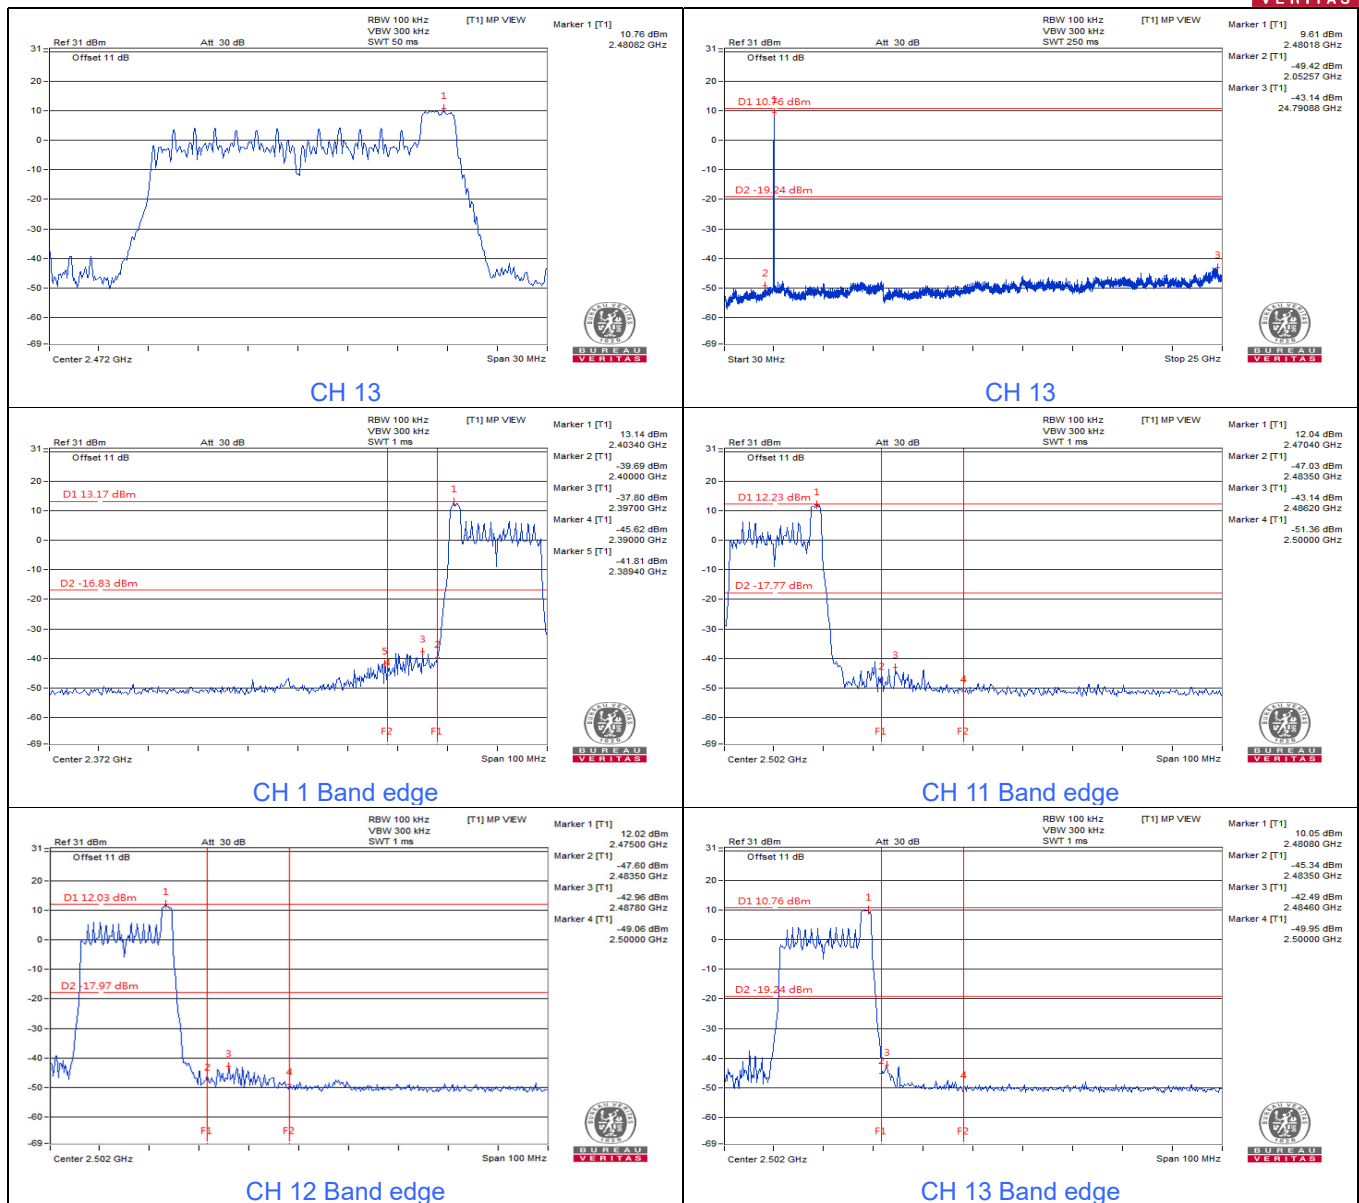



802.11be (EHT20) 52-tone RU

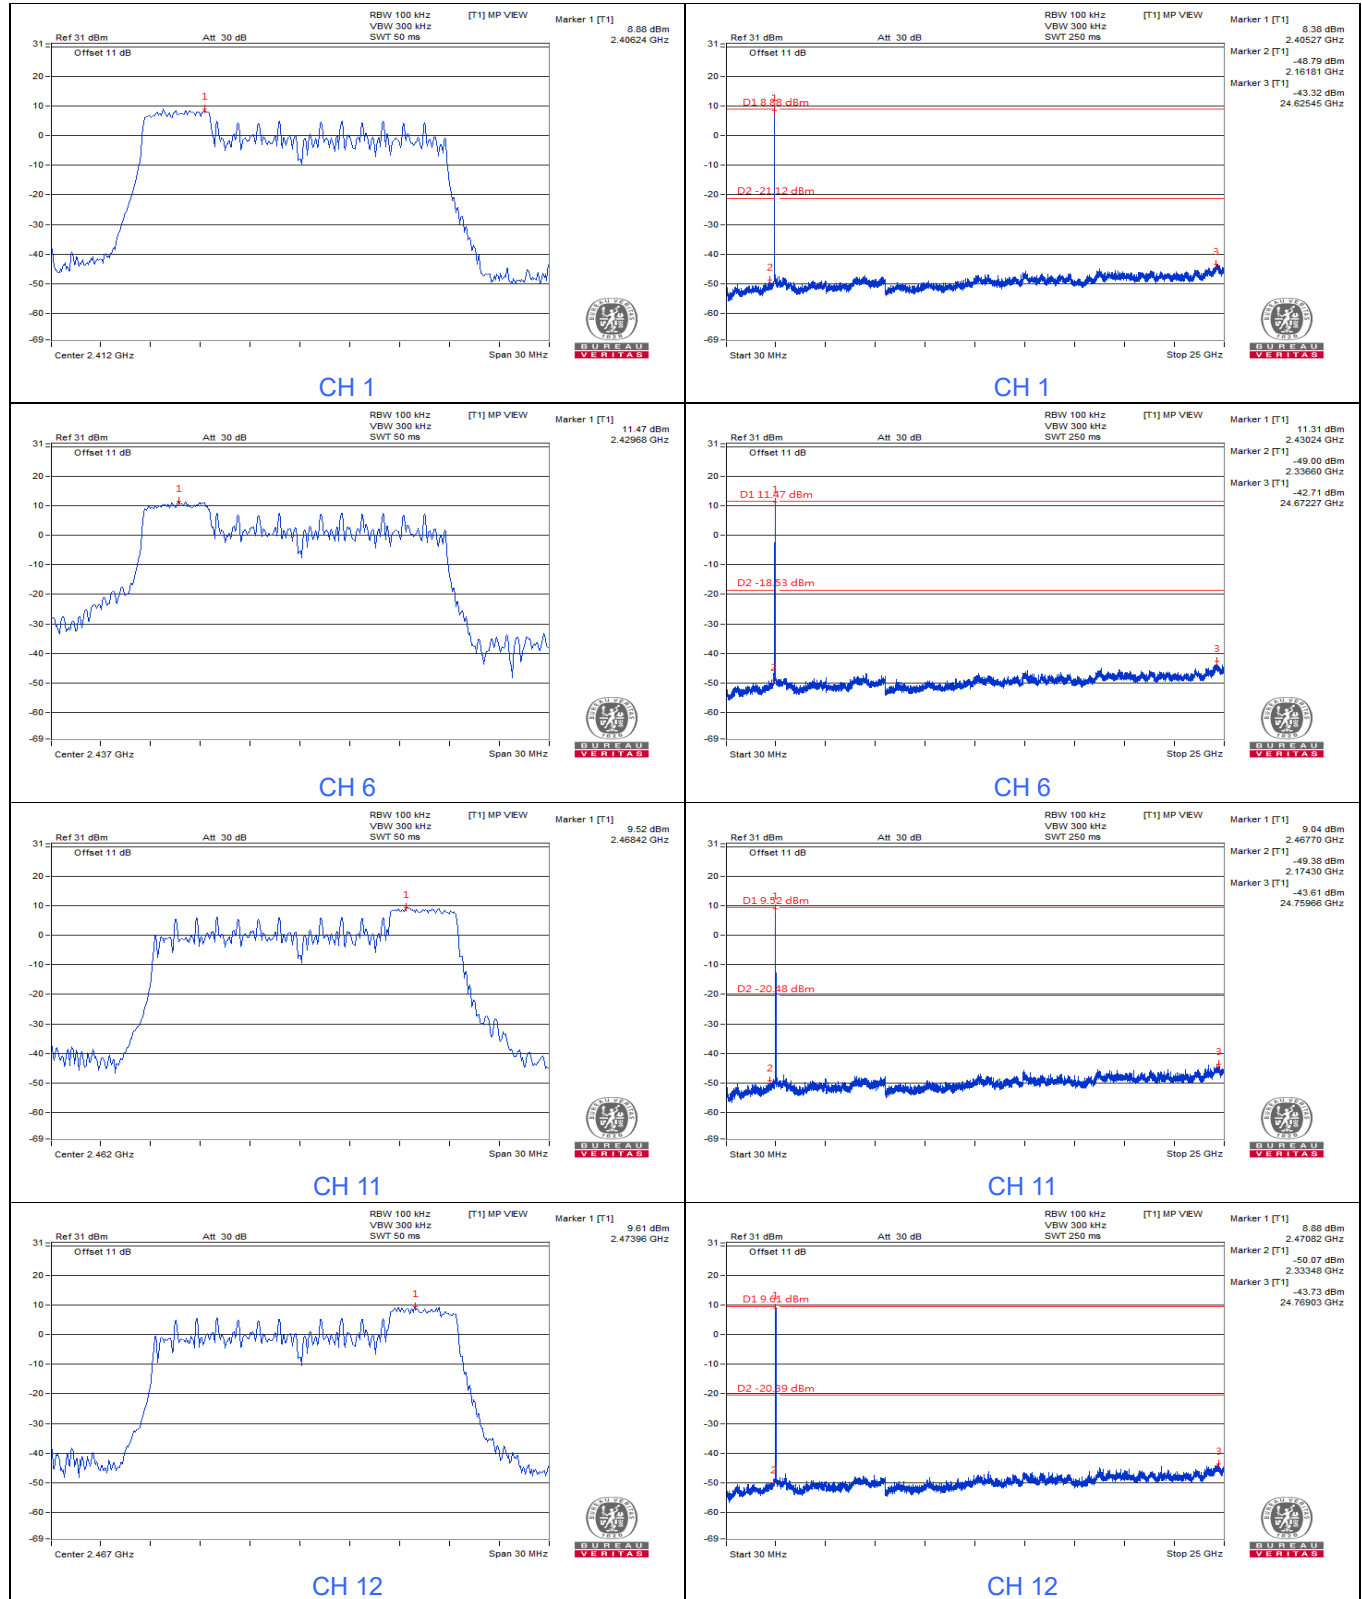

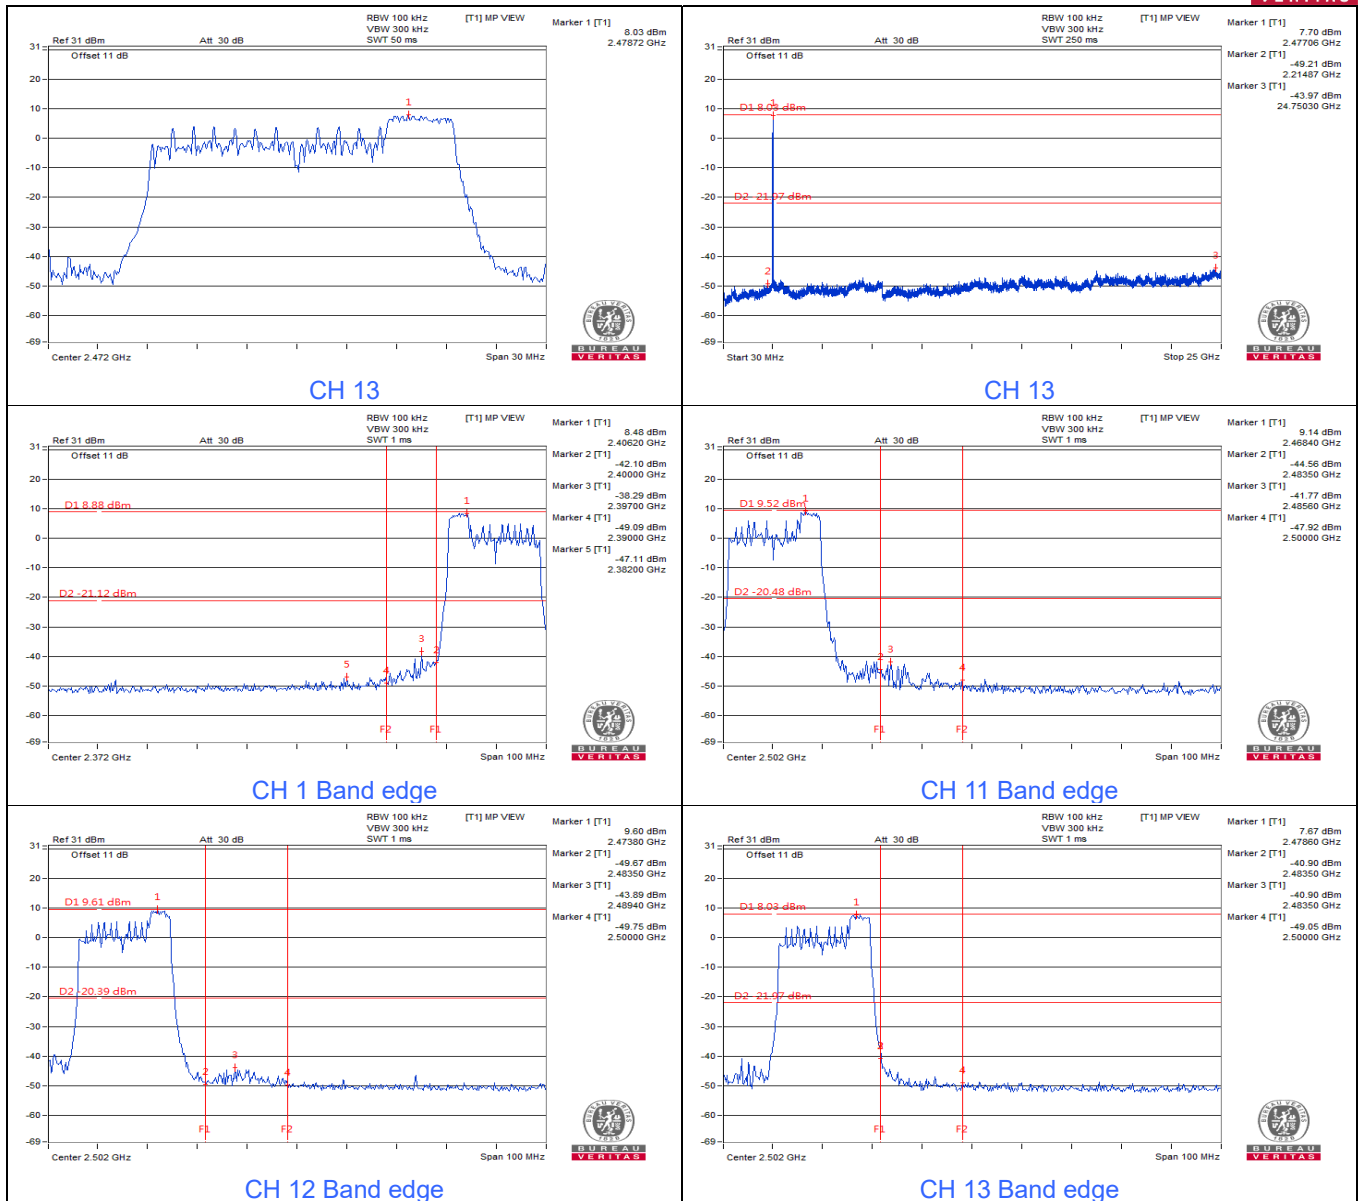


802.11be (EHT20) 106-tone RU

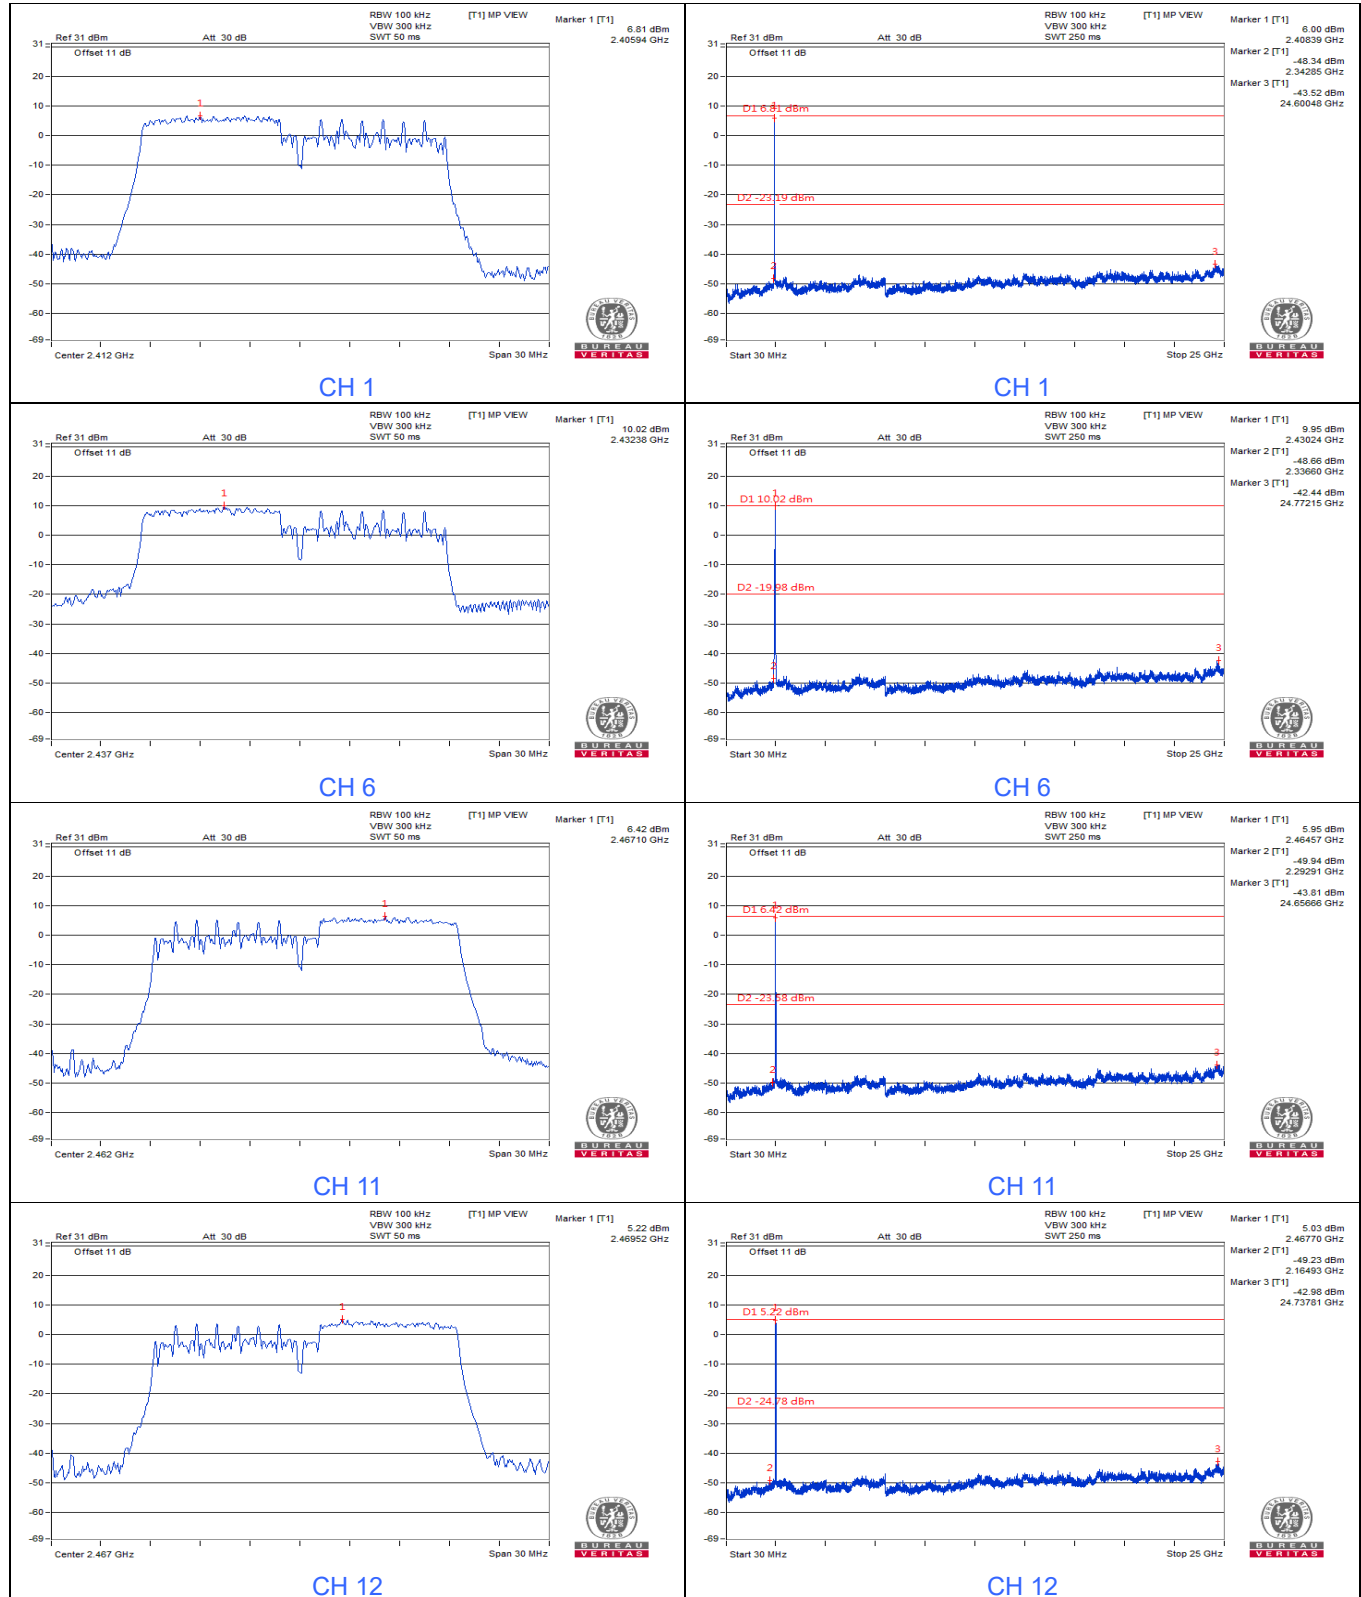


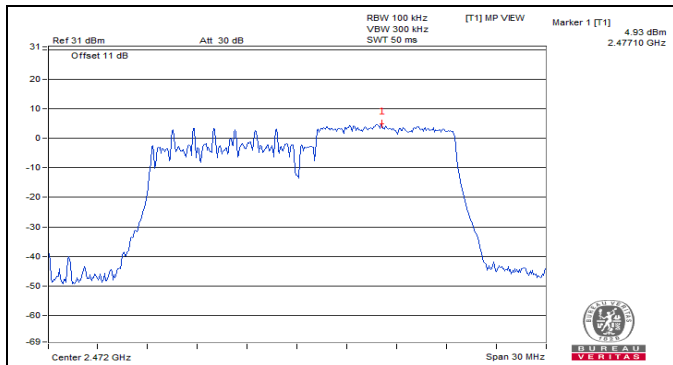


CH 13

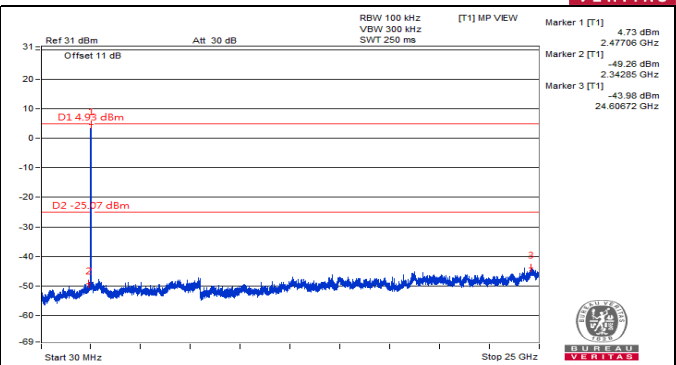


CH 13

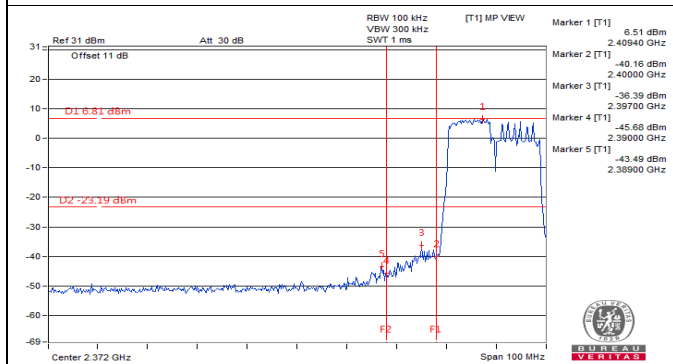


CH 1 Band edge

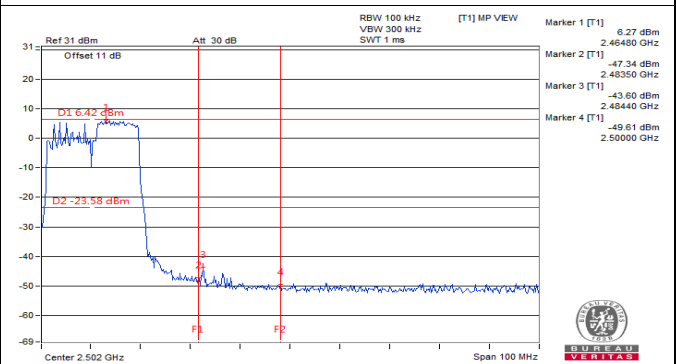

CH 11 Band edge

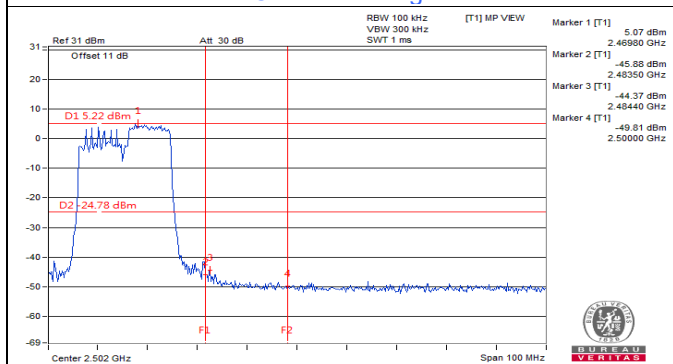








CH 12 Band edge

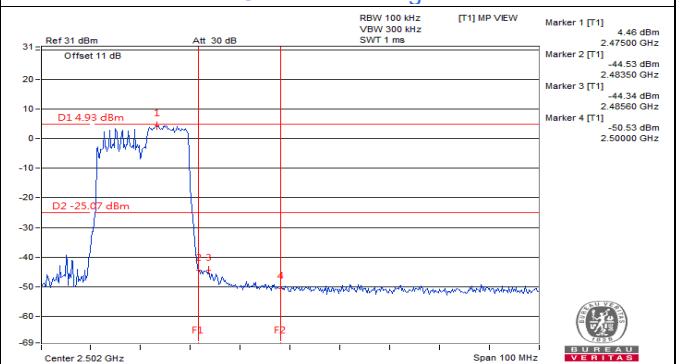


CH 13 Band edge







802.11be (EHT20) 52+26-tone MRU

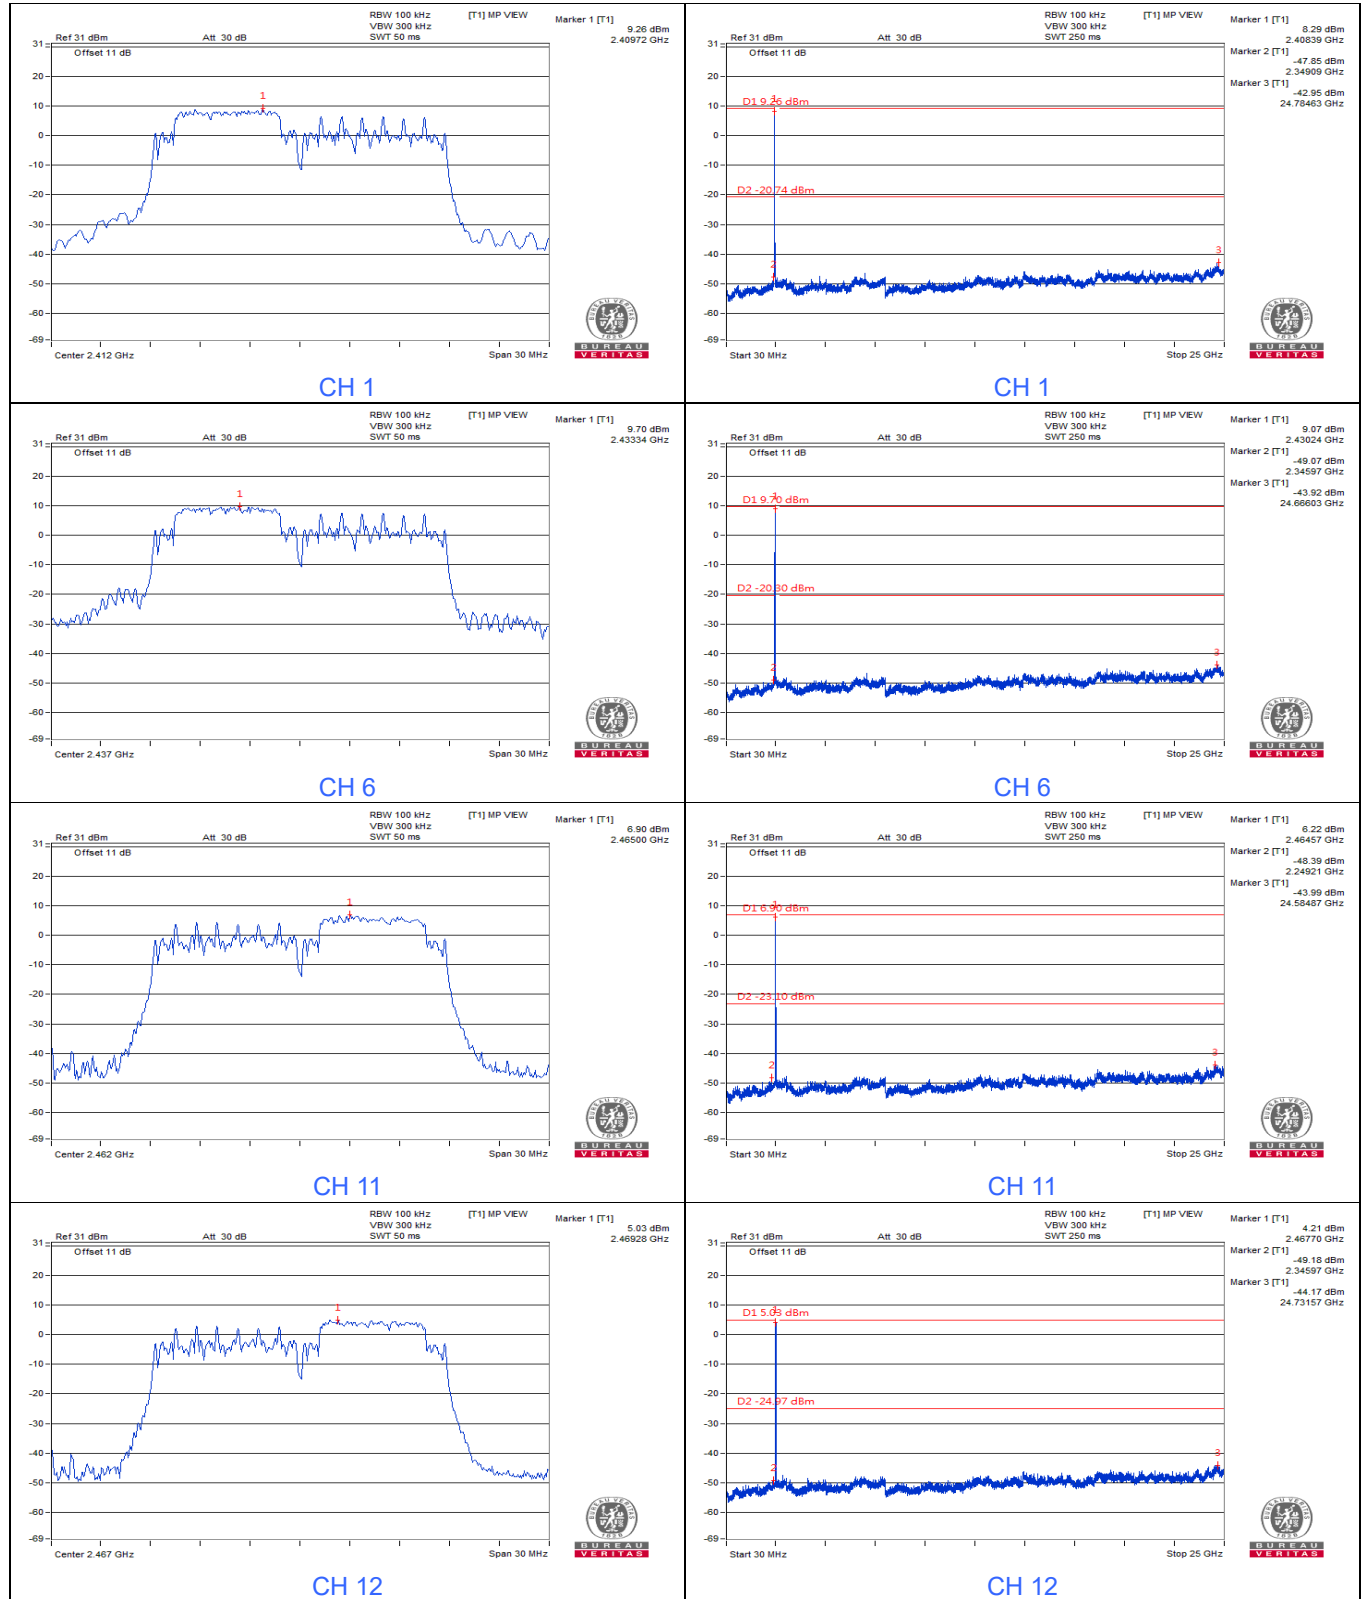

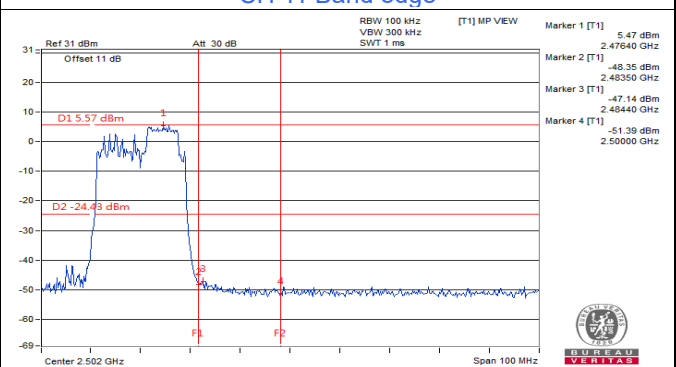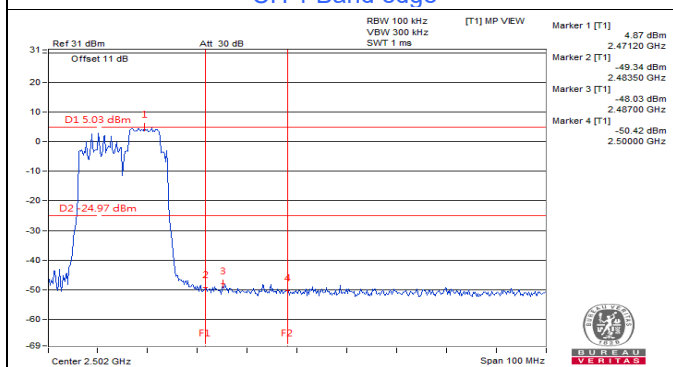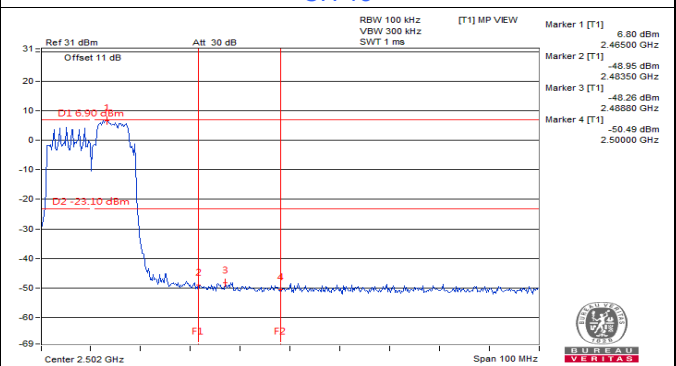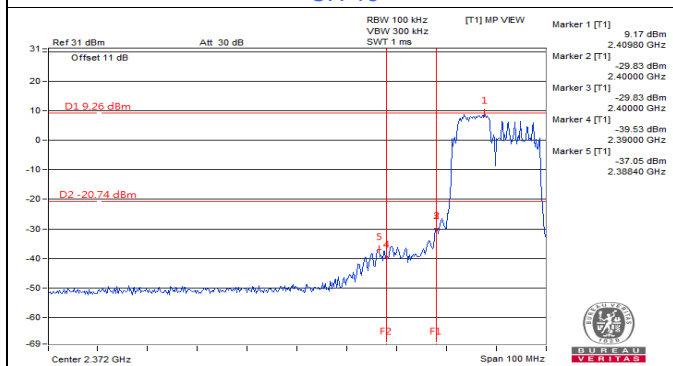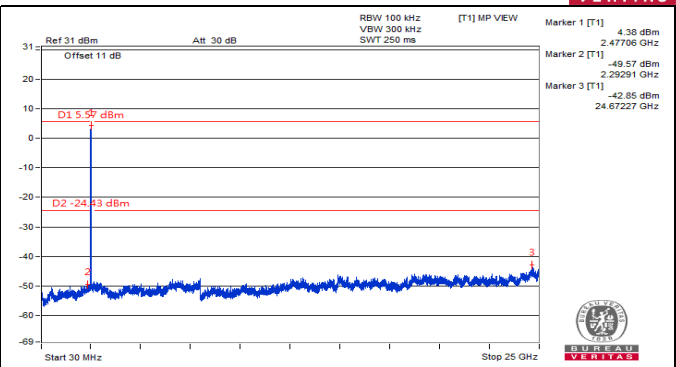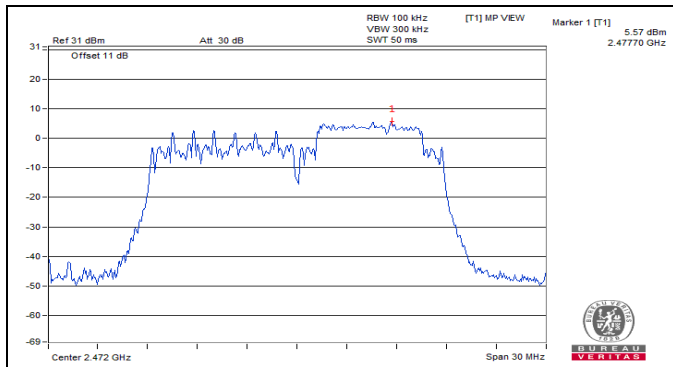










802.11be (EHT20) 106+26-tone MRU

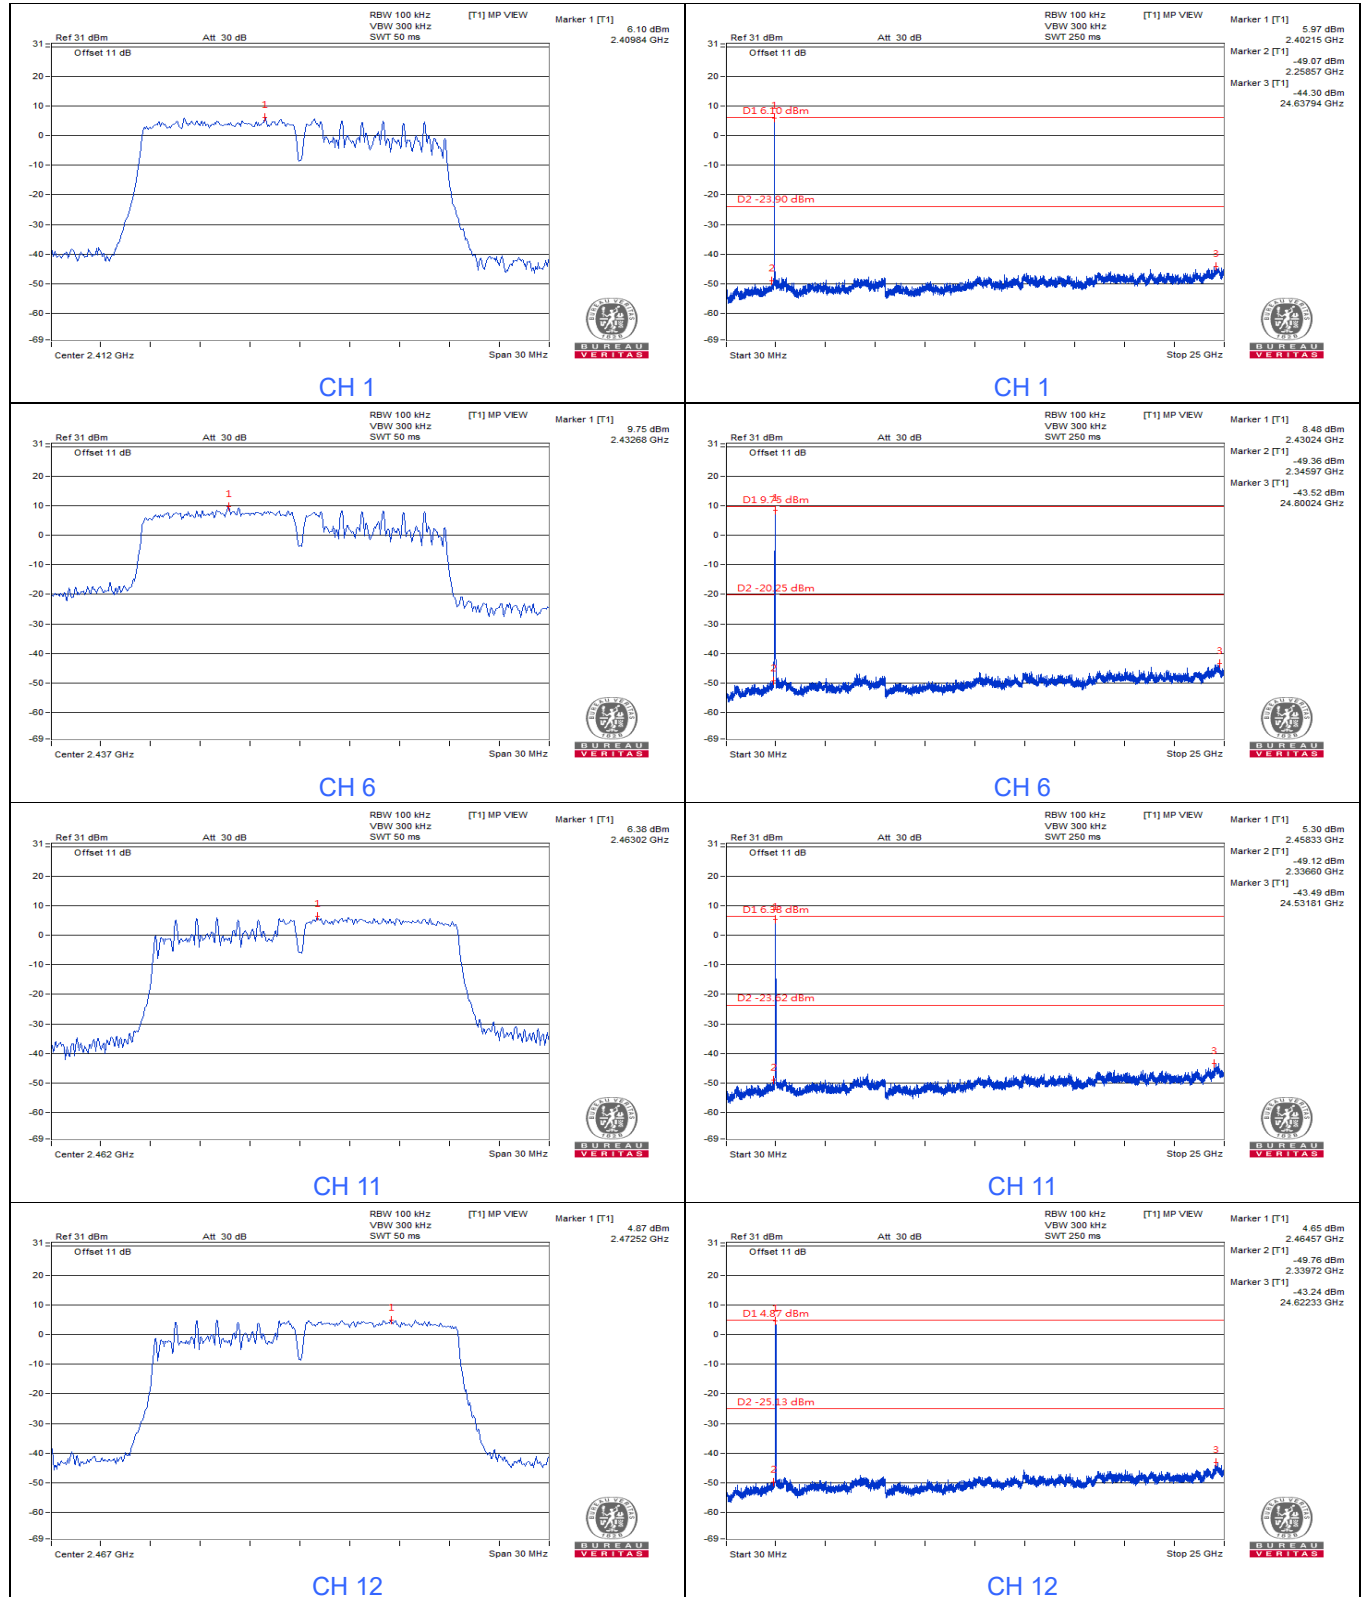

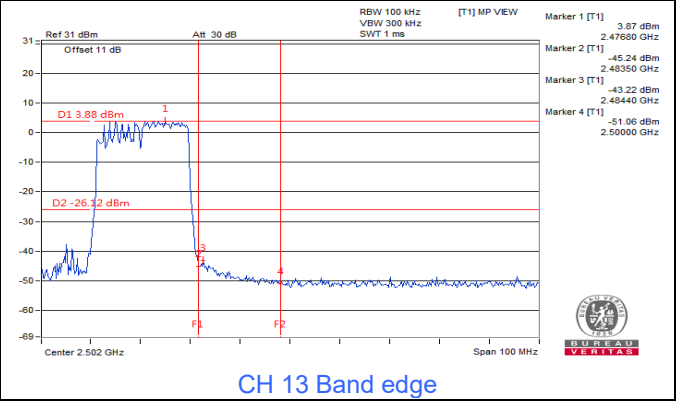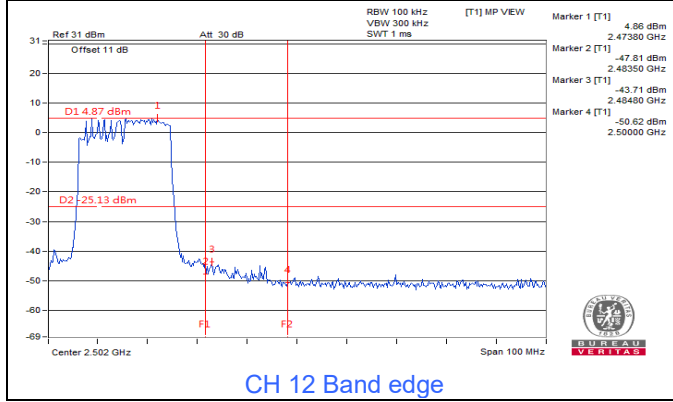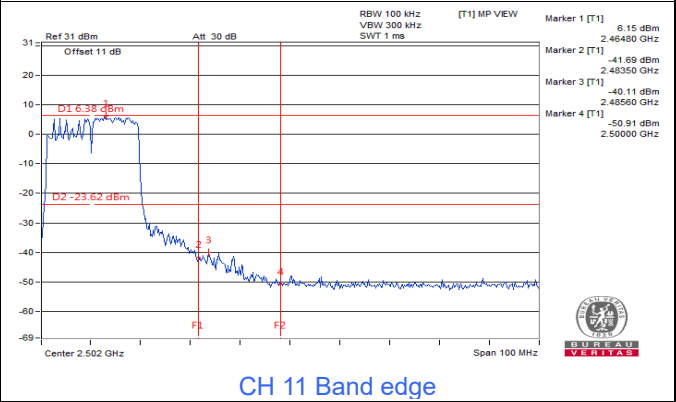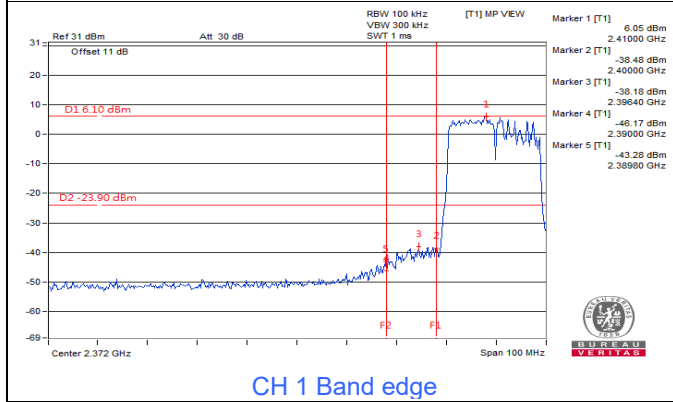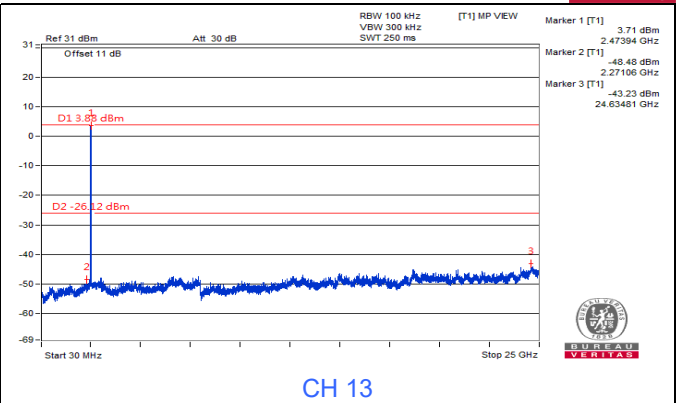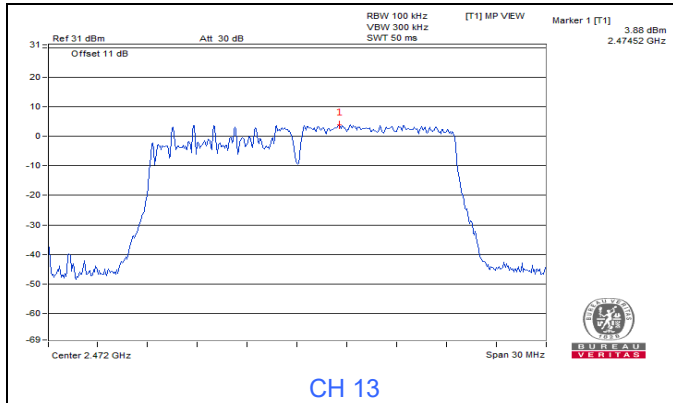


2TX
802.11b

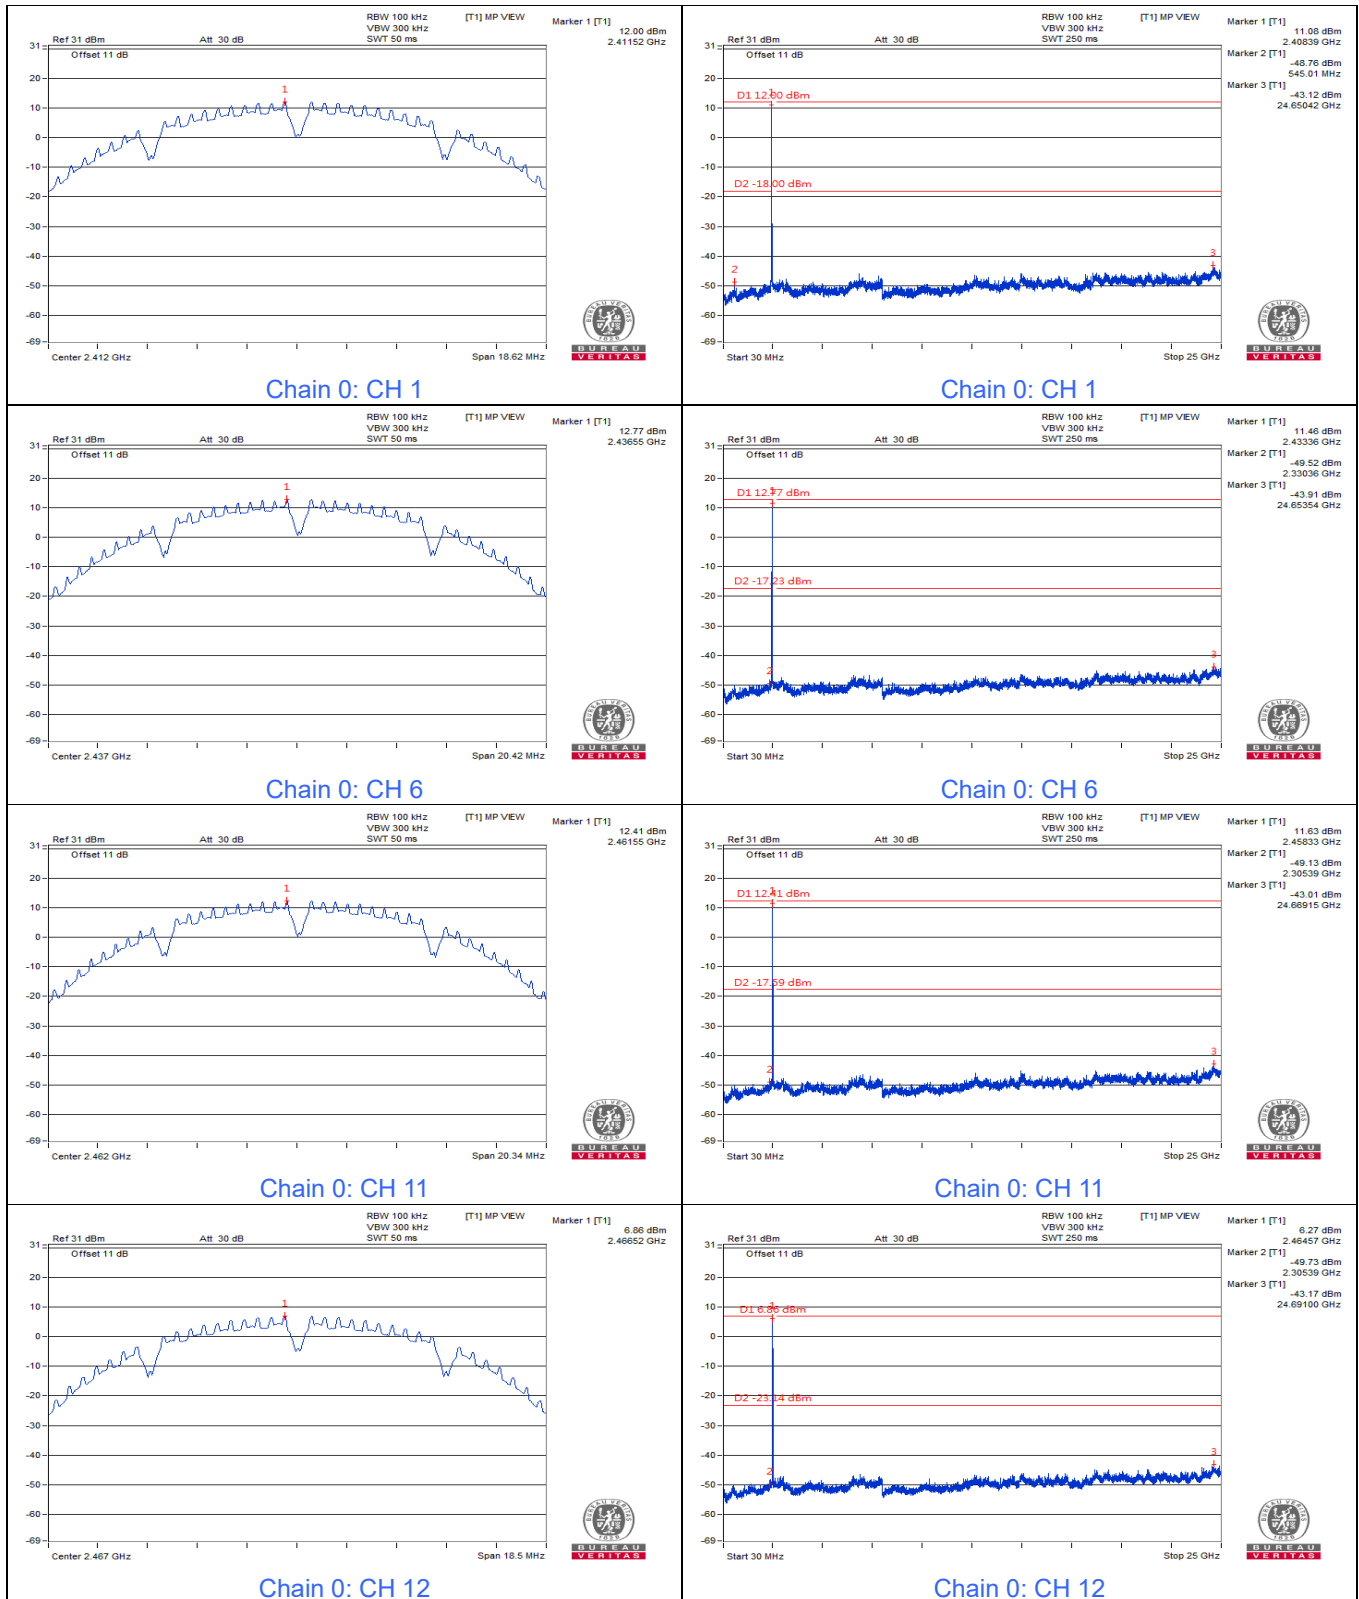

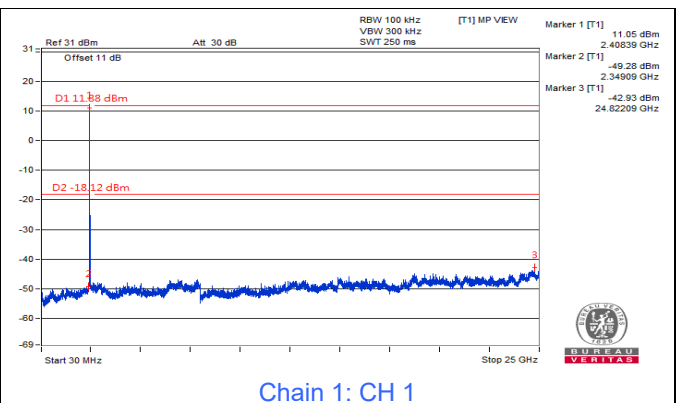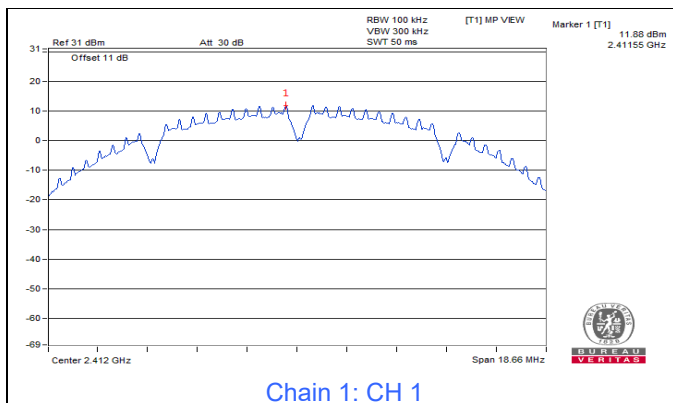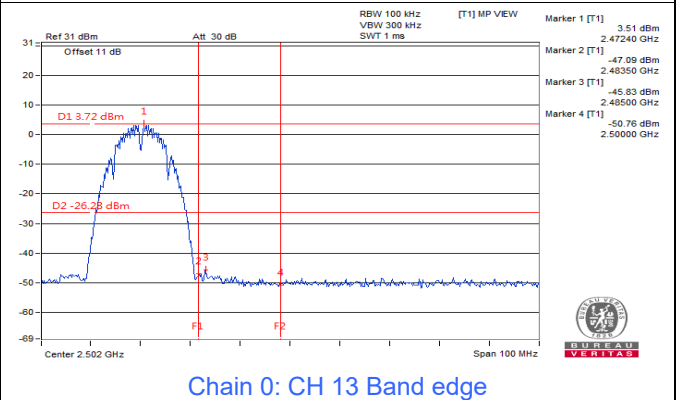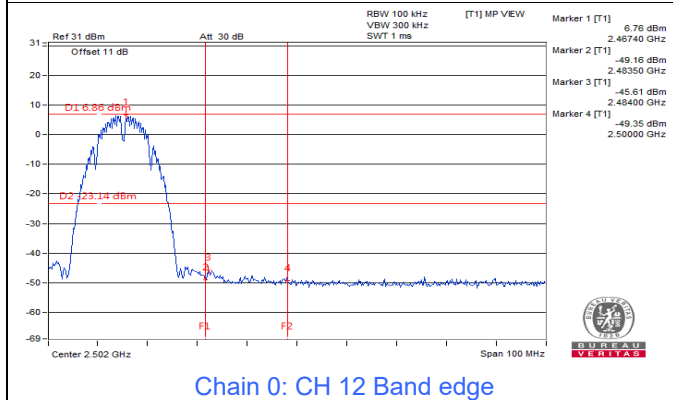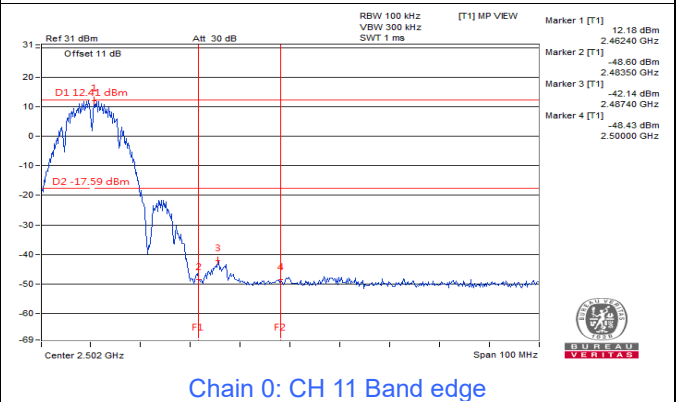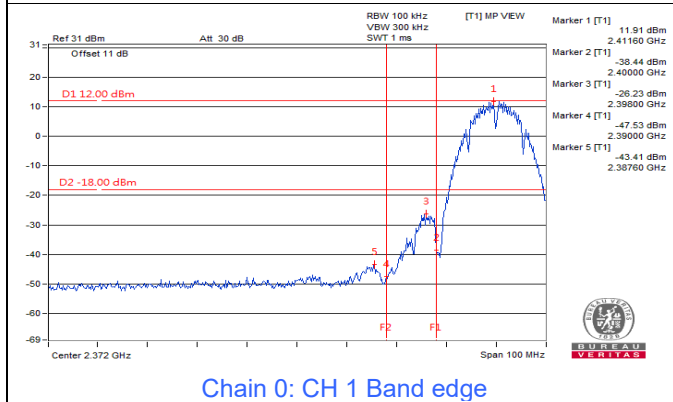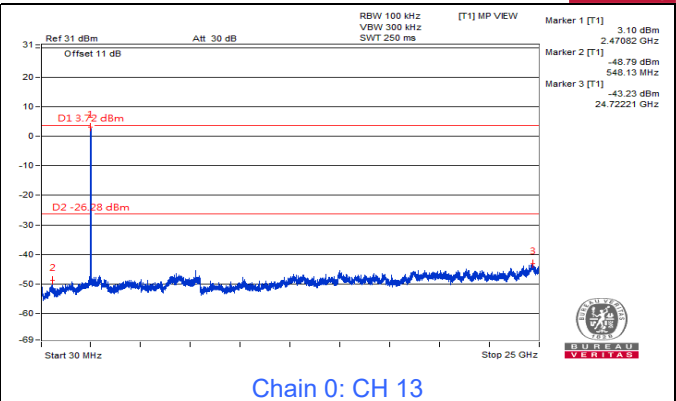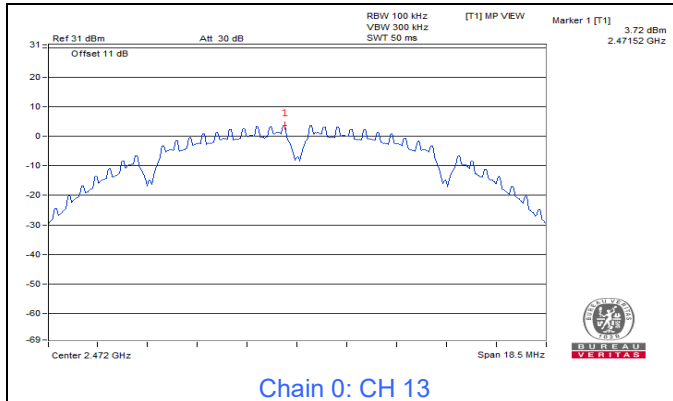





BUREAU
VERITAS

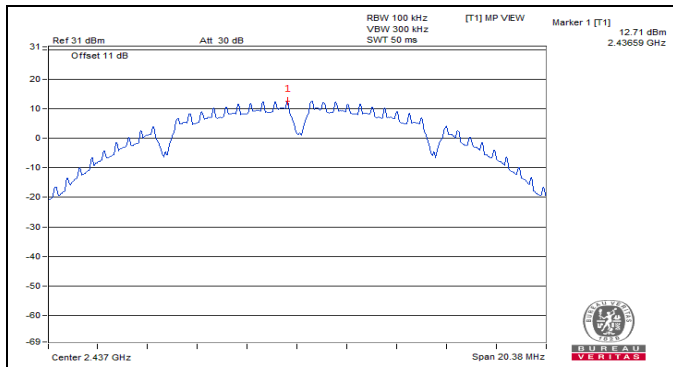


Chain 1: CH 6

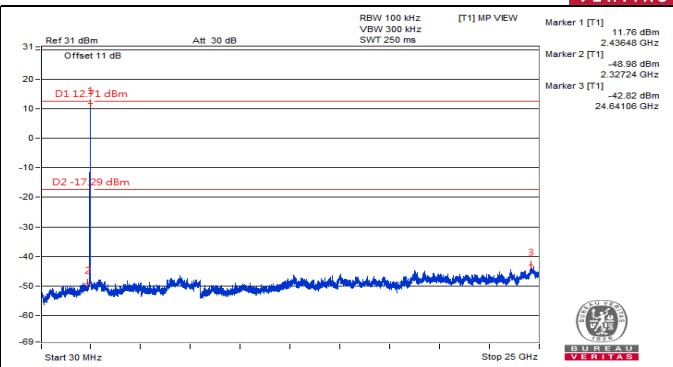


Chain 1: CH 6

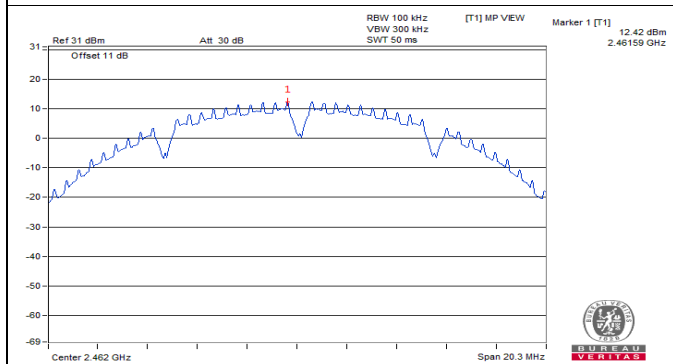


Chain 1: CH 11

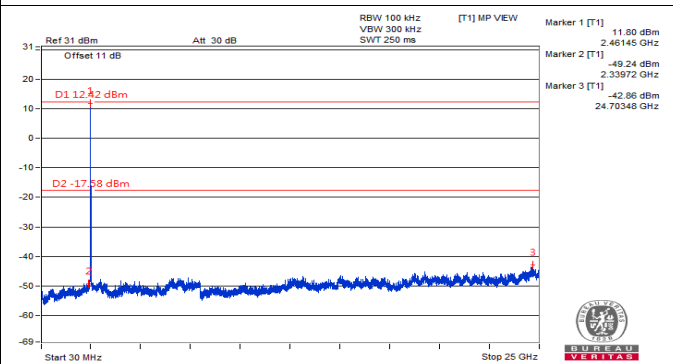


Chain 1: CH 11

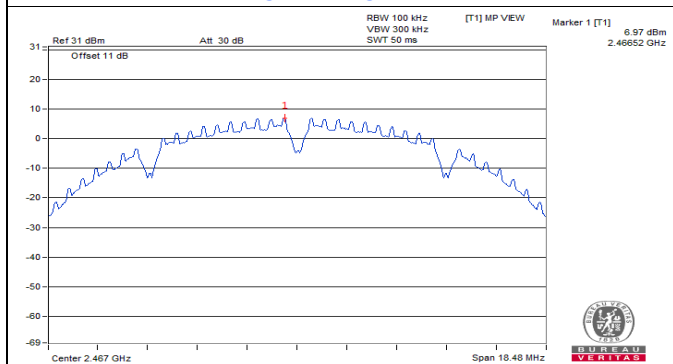


Chain 1: CH 12

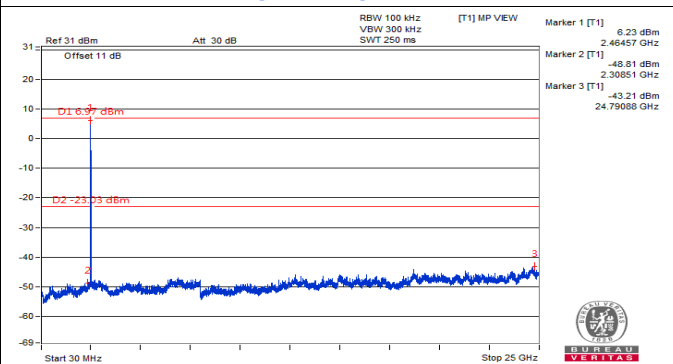


Chain 1: CH 12

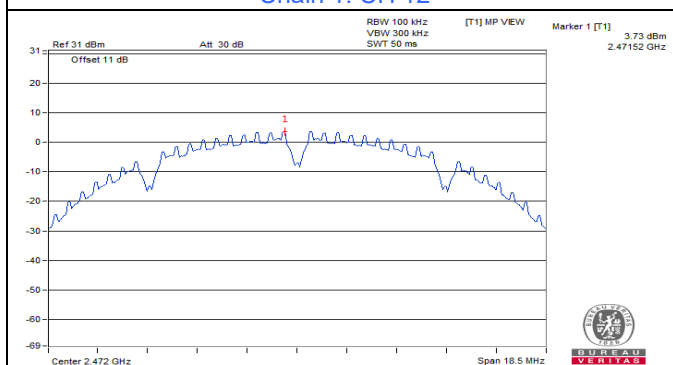


Chain 1: CH 13

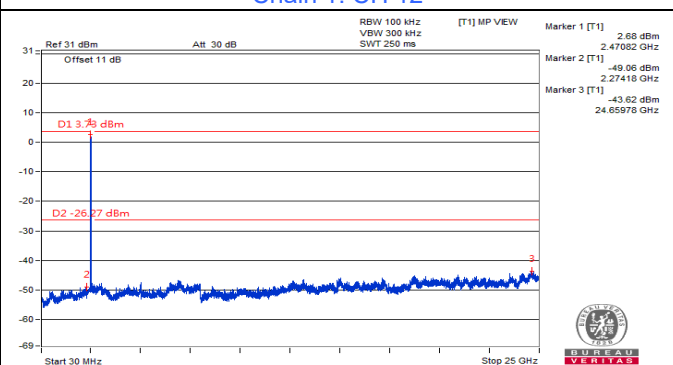


Chain 1: CH 13

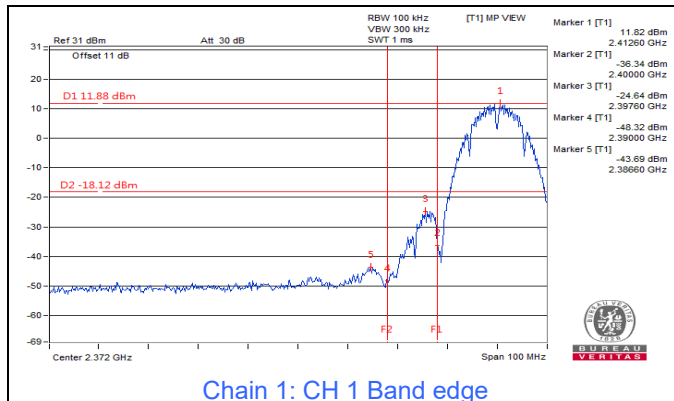


Chain 1: CH 1 Band edge

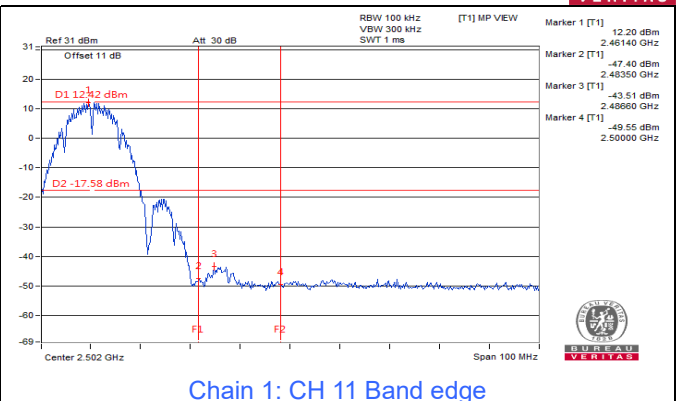

Chain 1: CH 11 Band edge

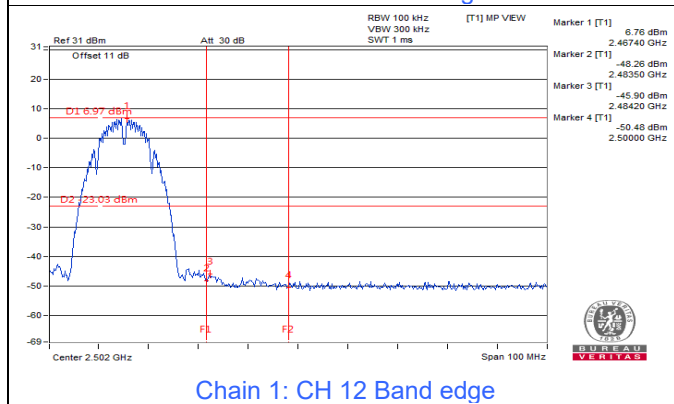










Chain 1: CH 12 Band edge







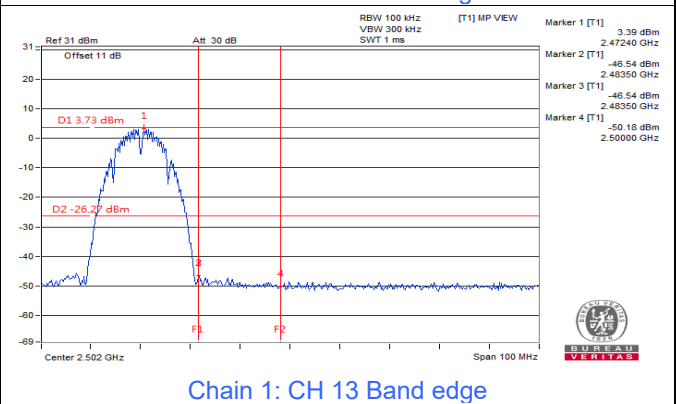










Chain 1: CH 13 Band edge




802.11g

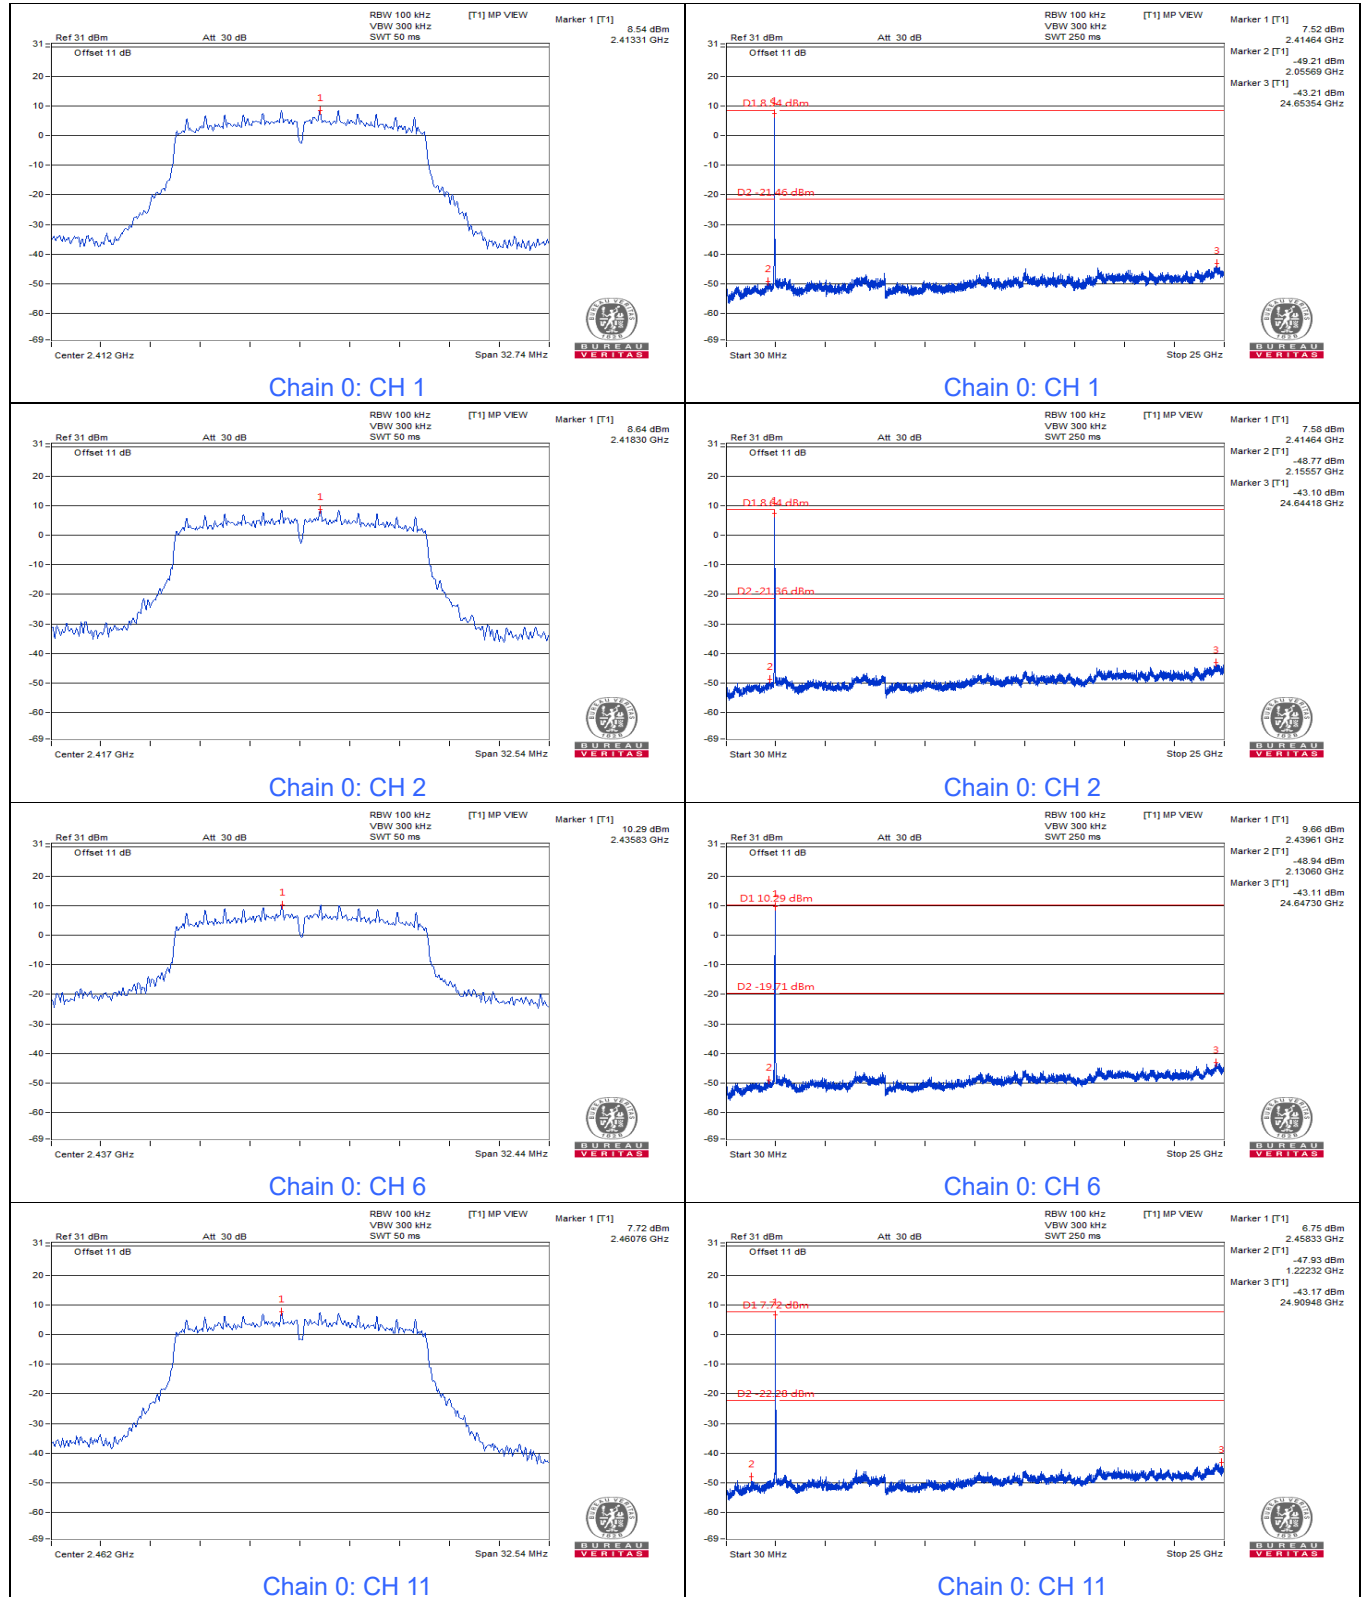

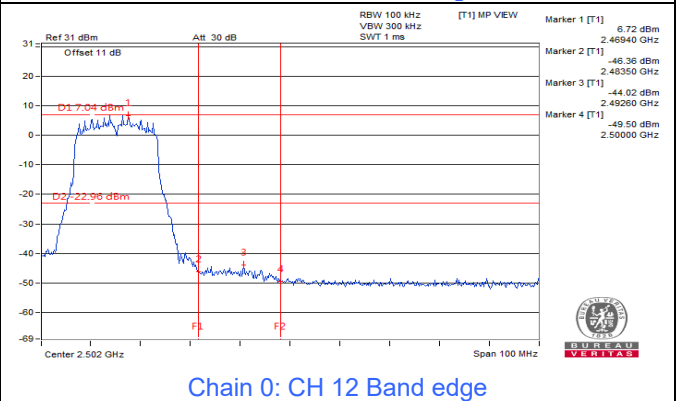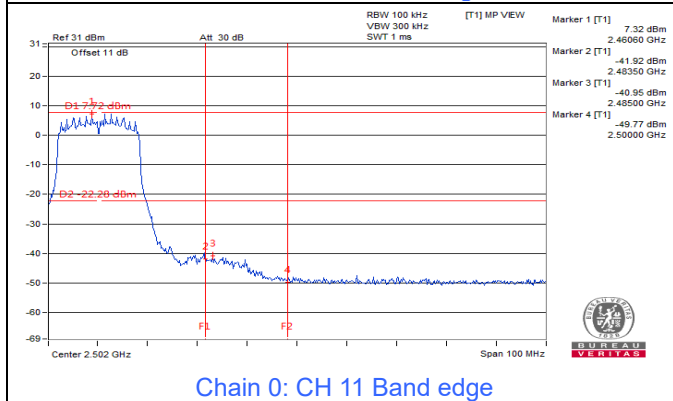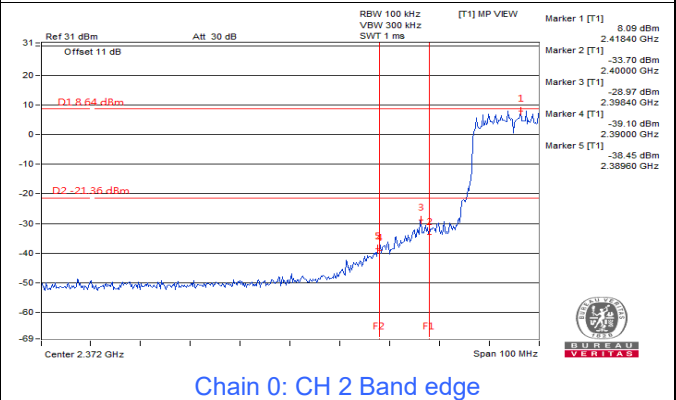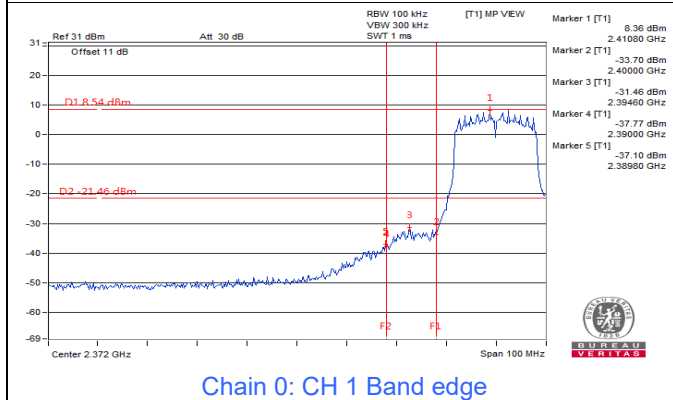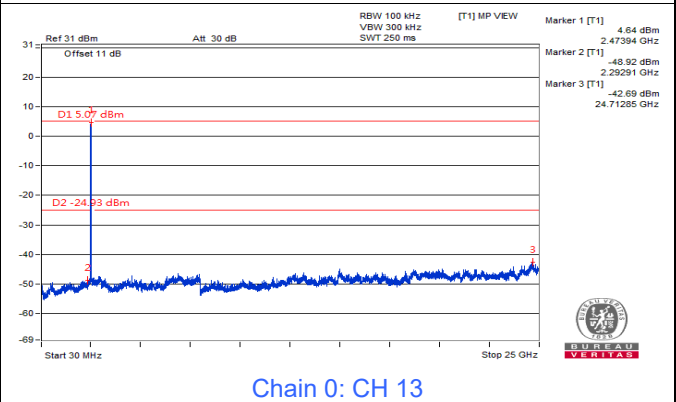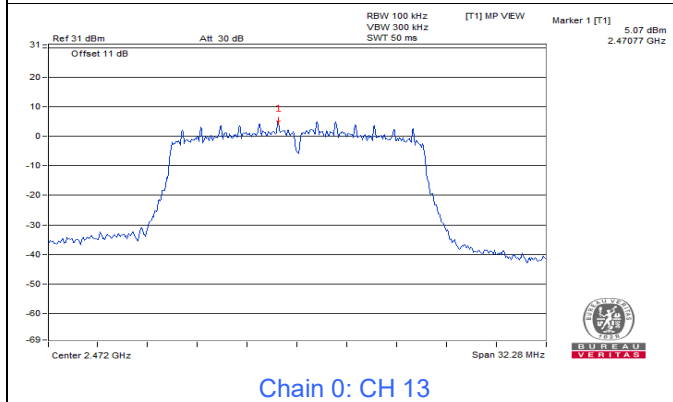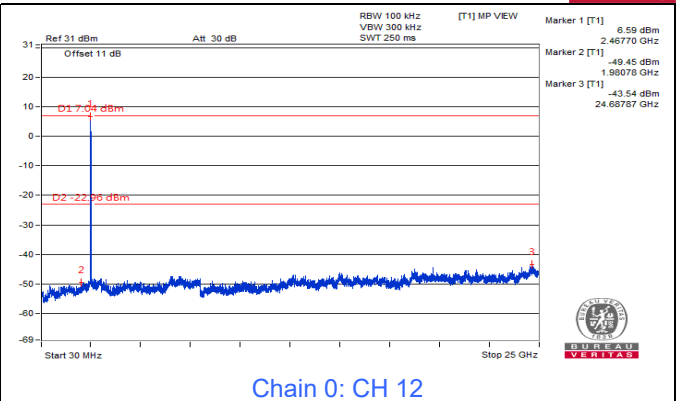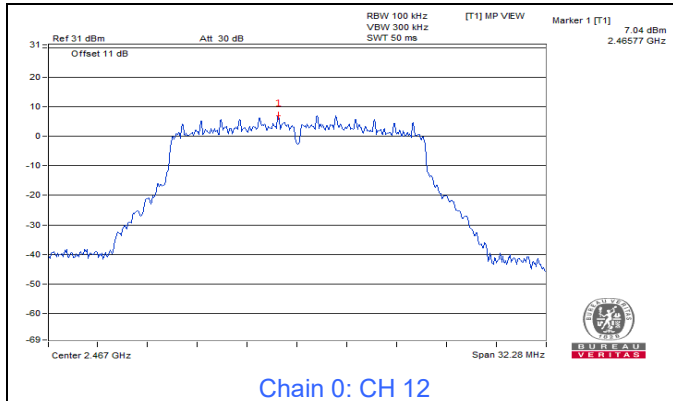



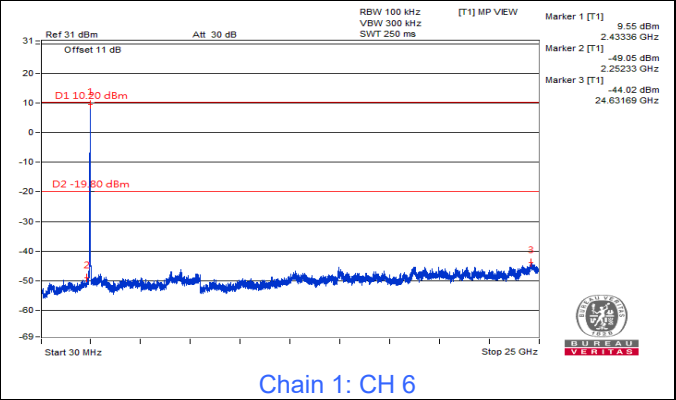
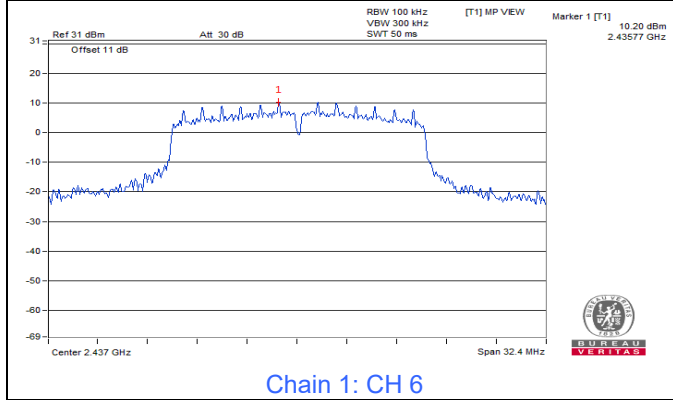
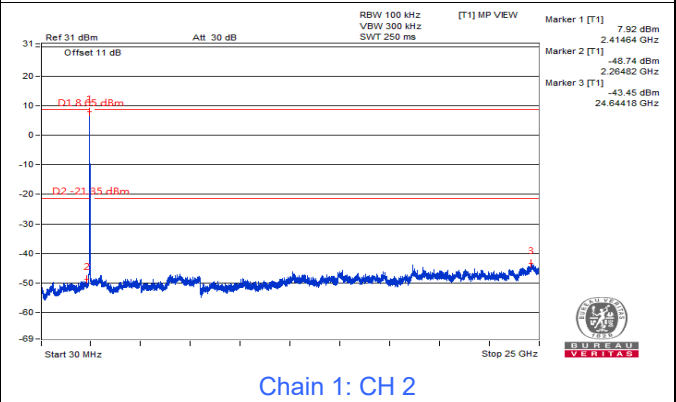
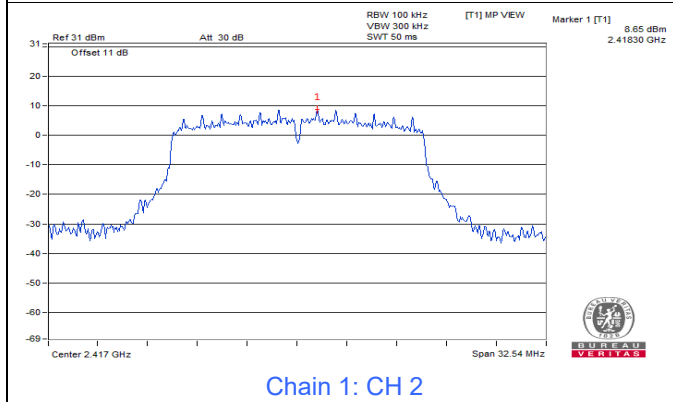
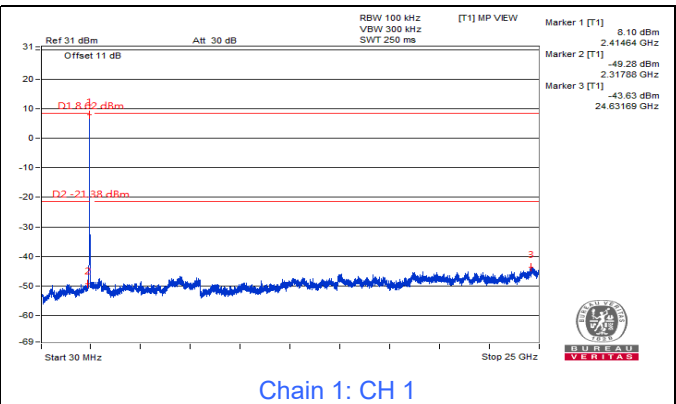
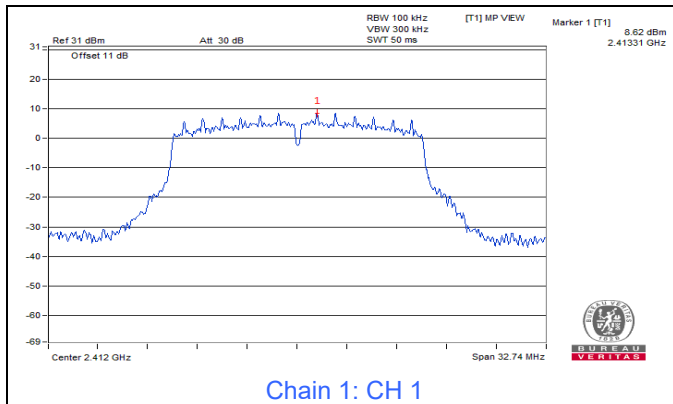
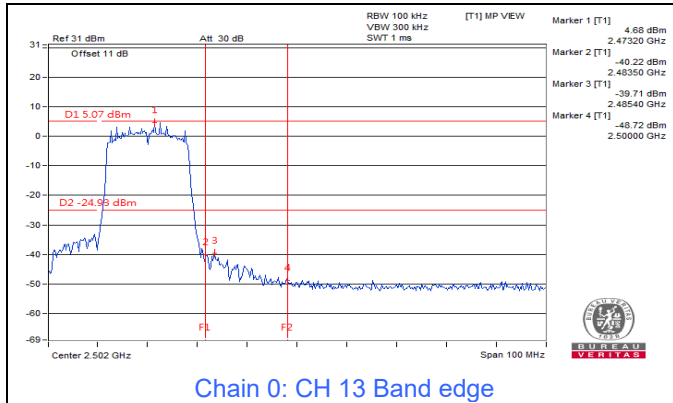


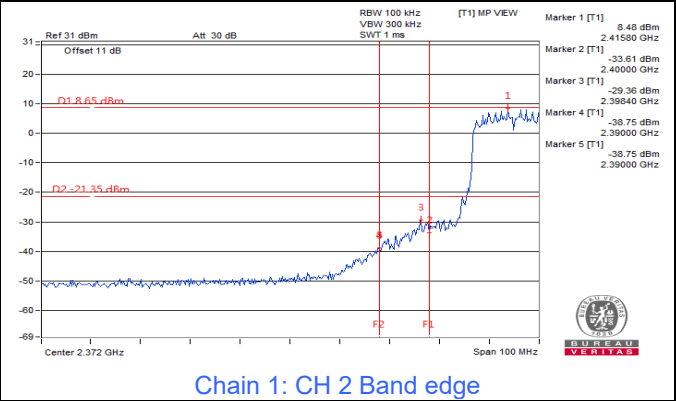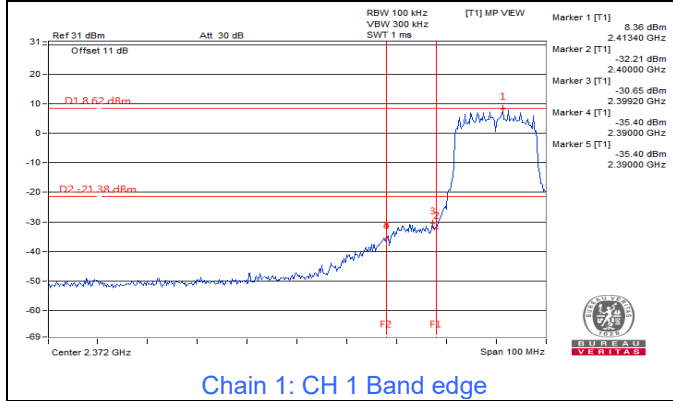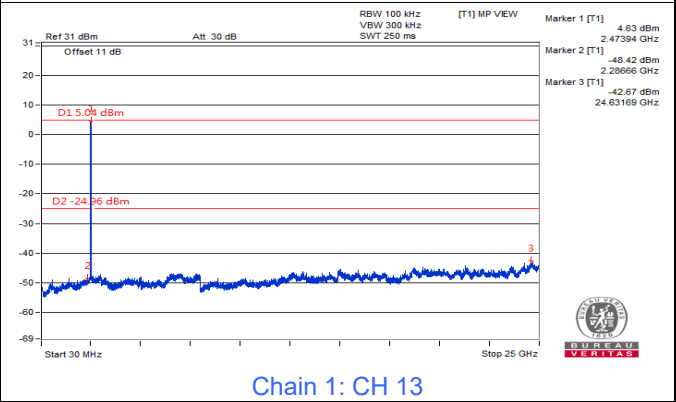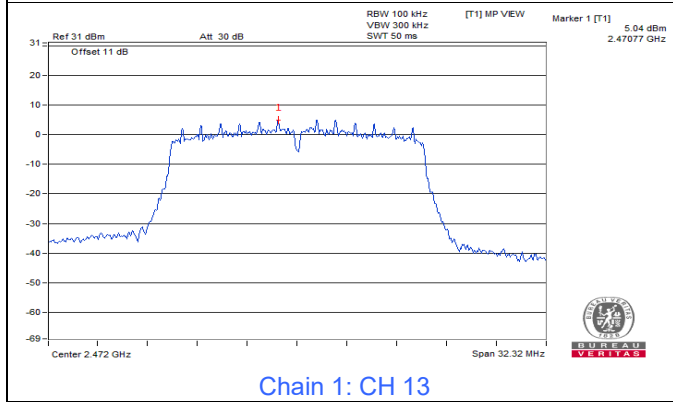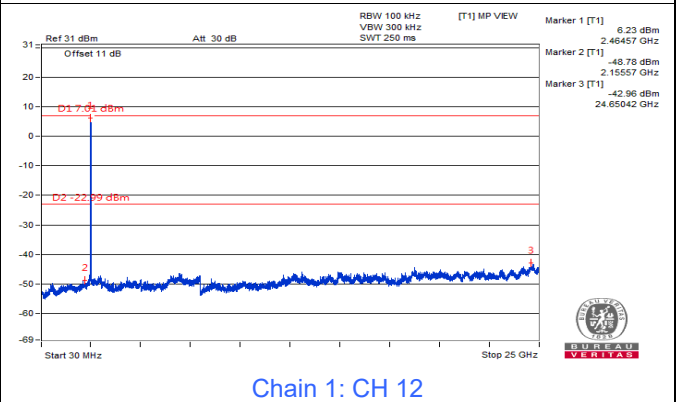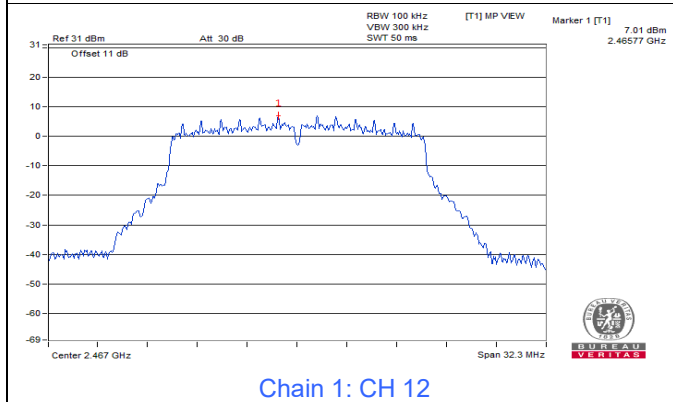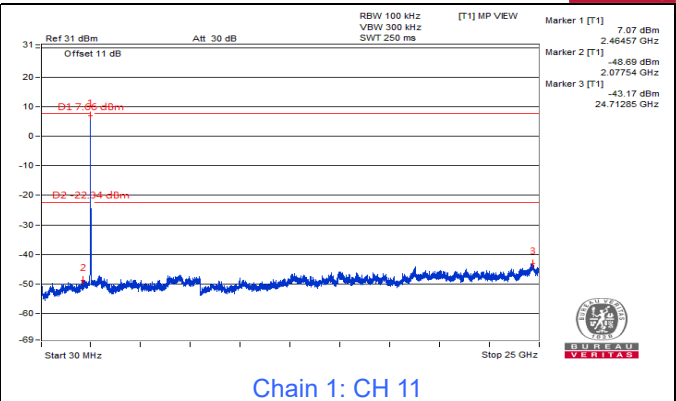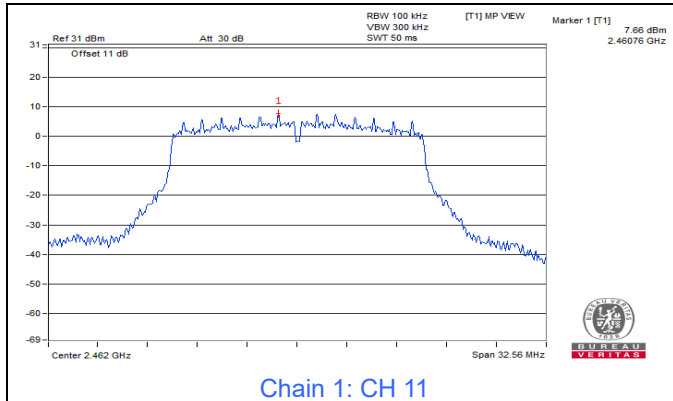

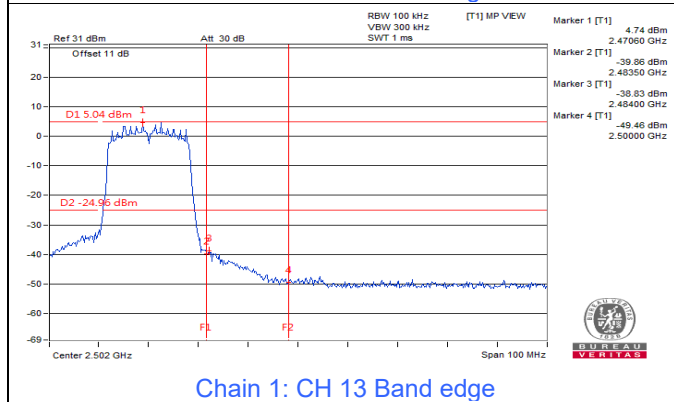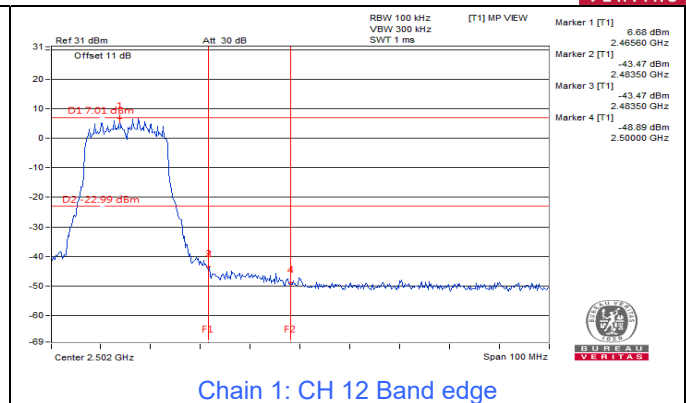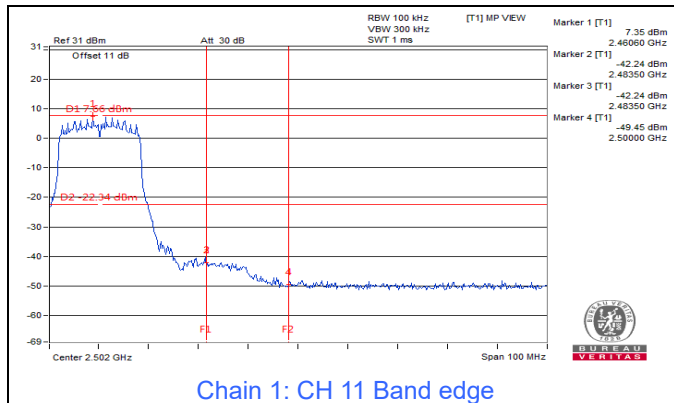


802.11be (EHT20)

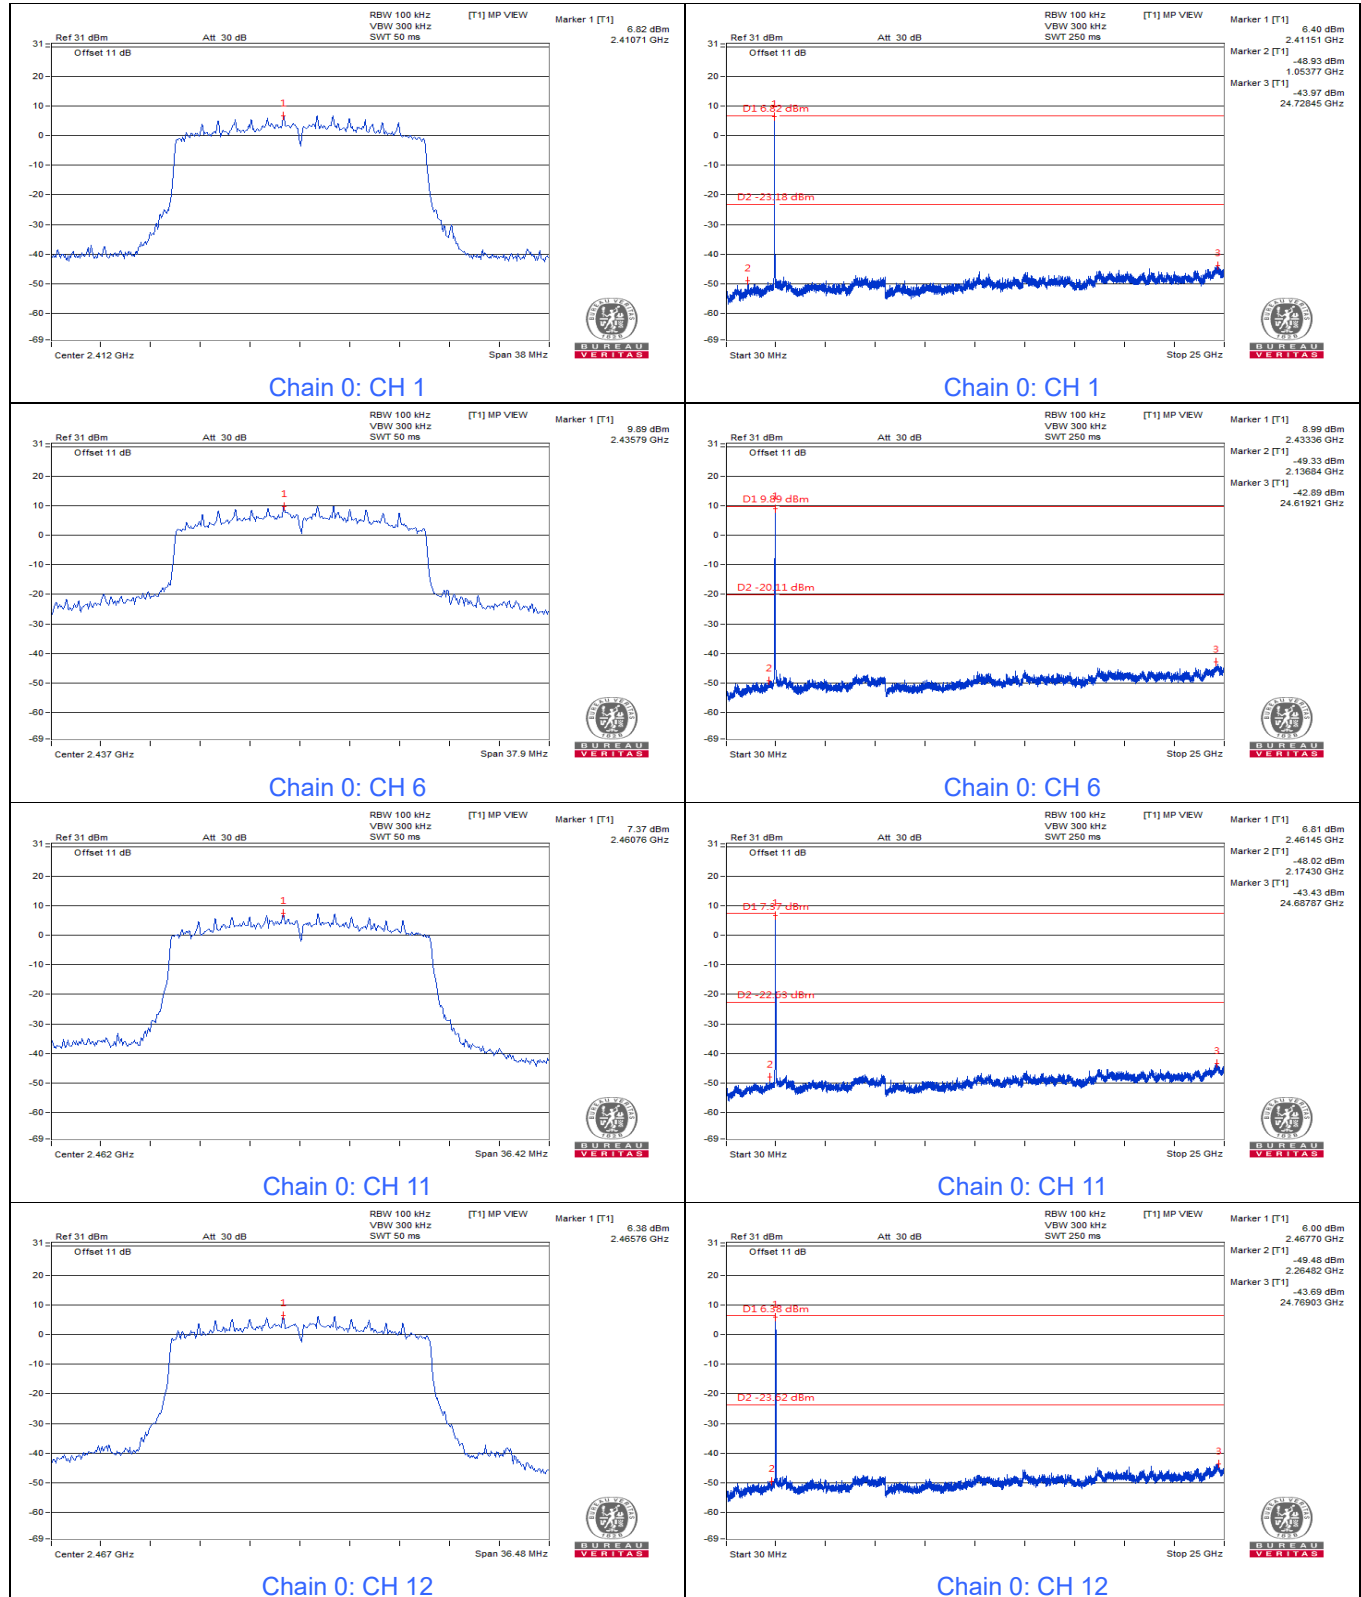


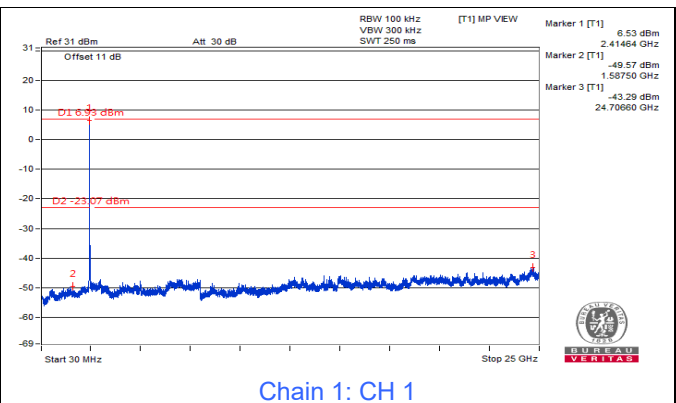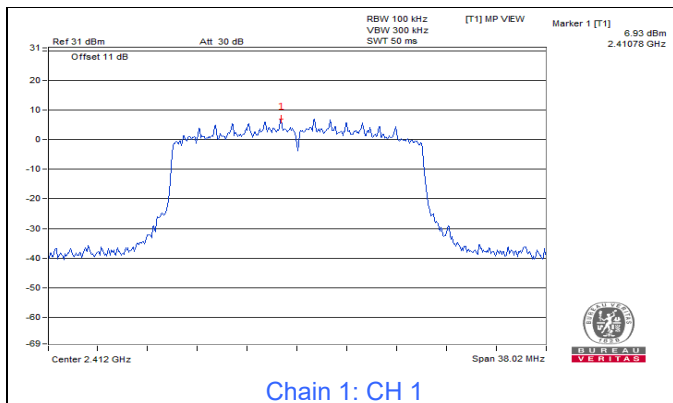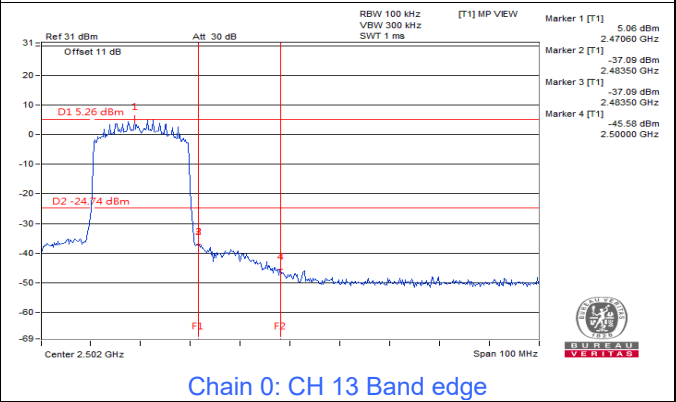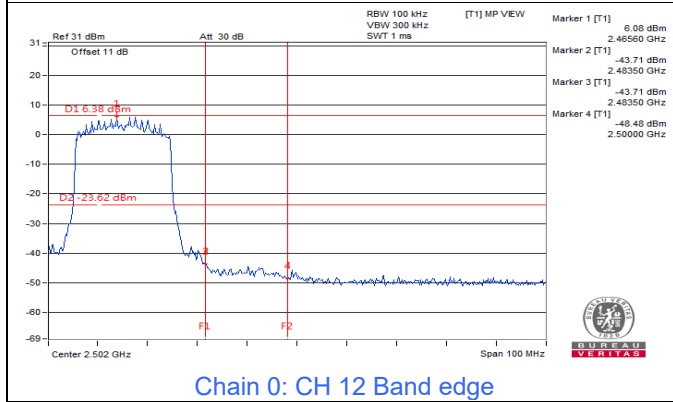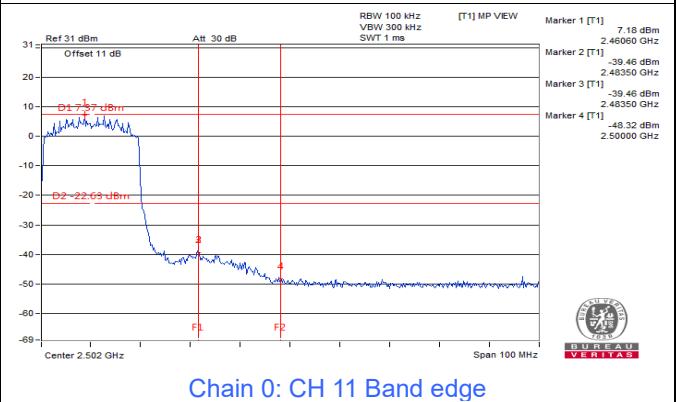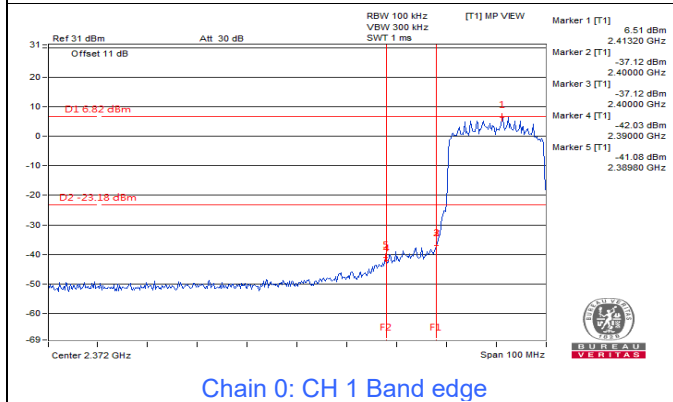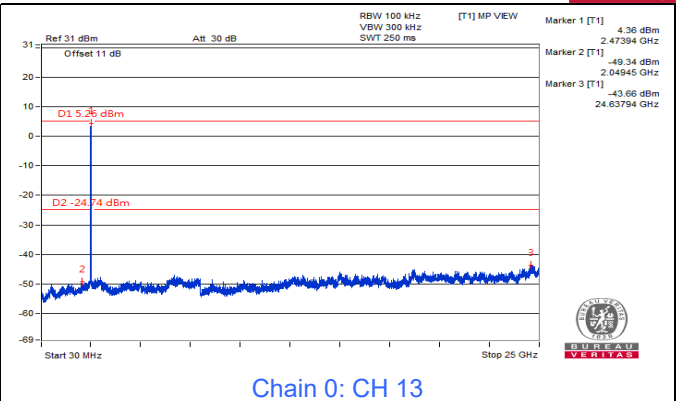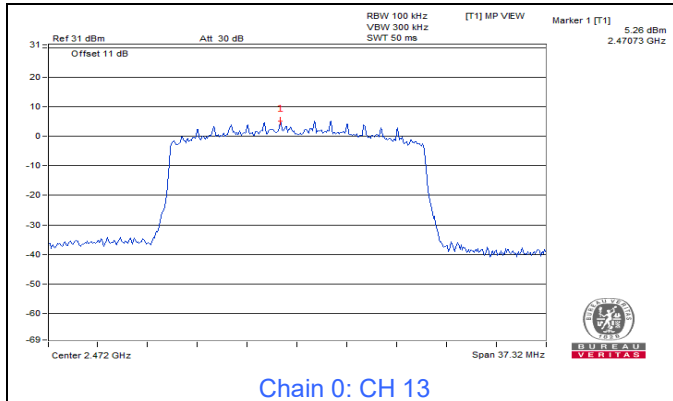




BUREAU
VERITAS

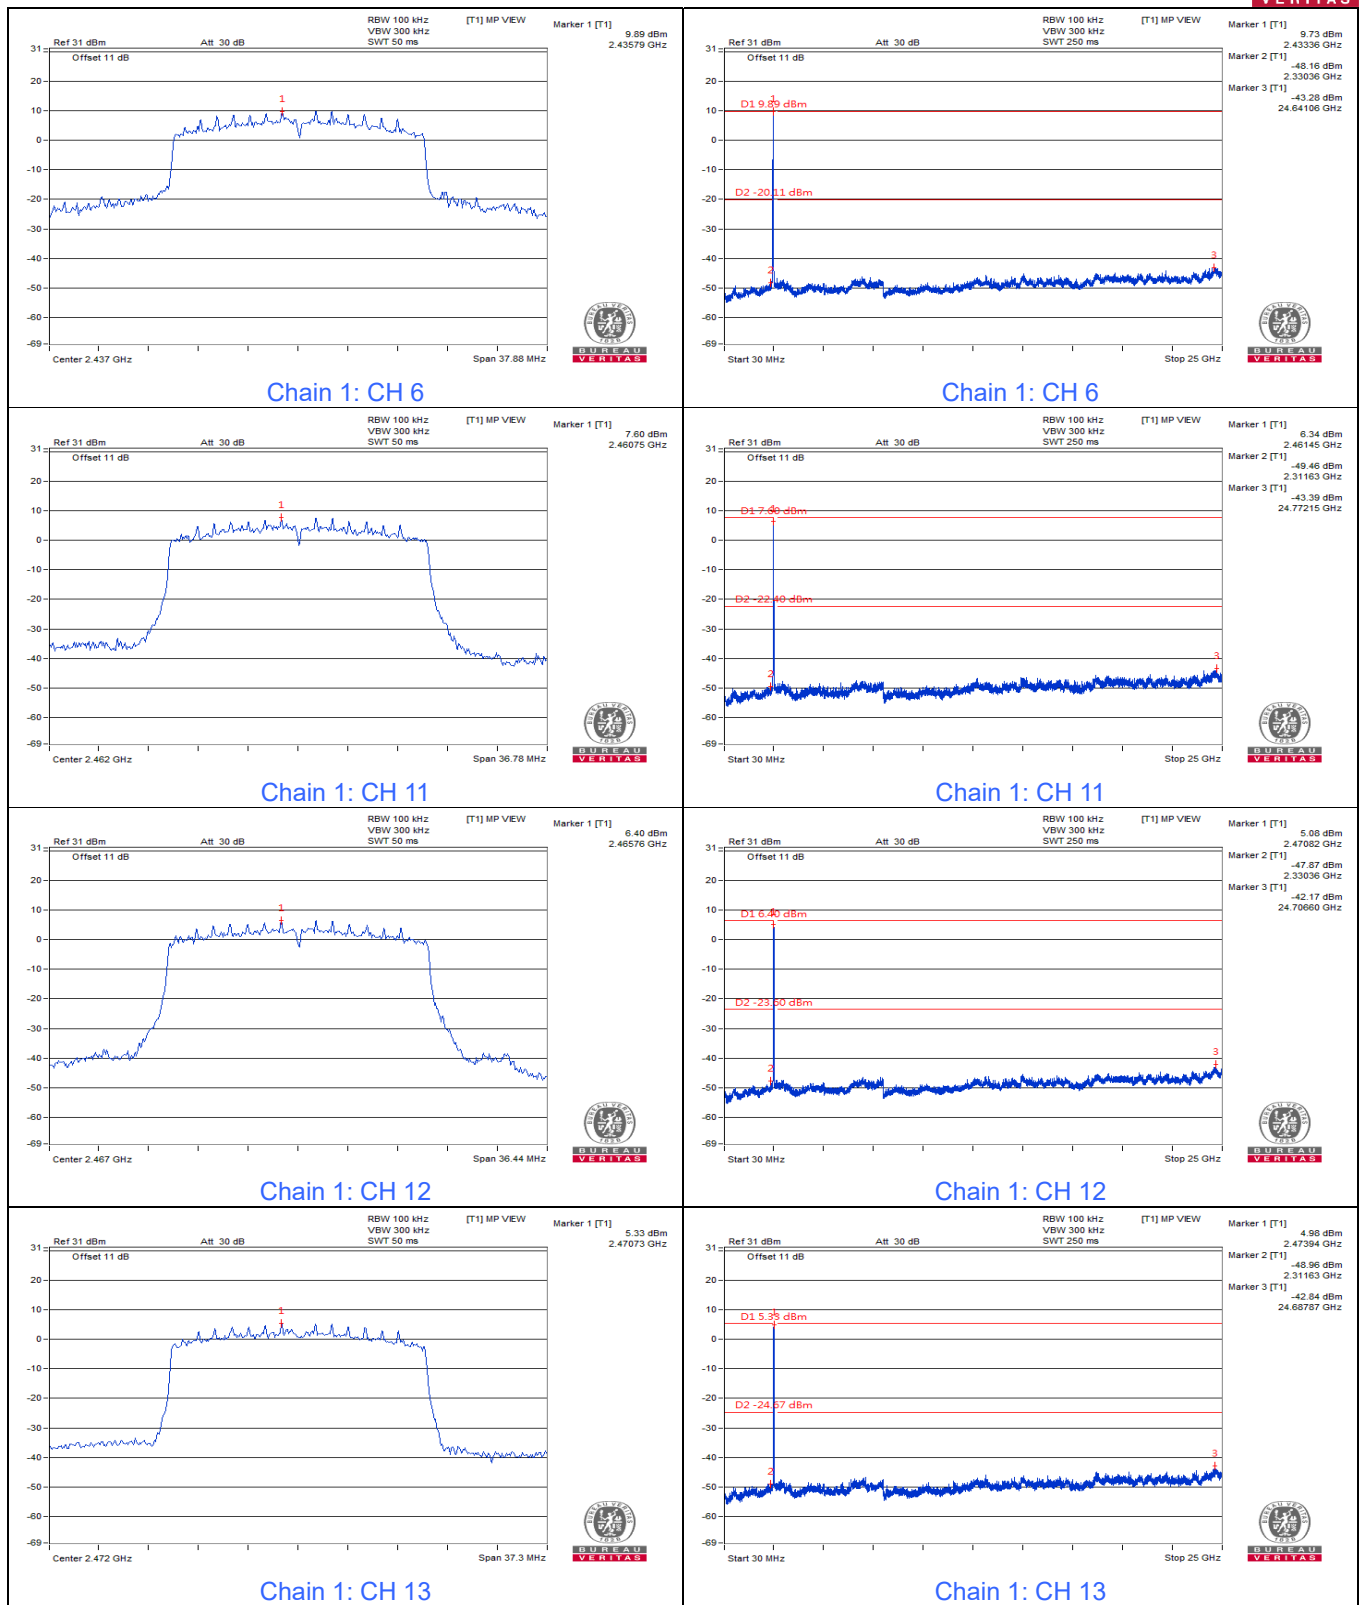


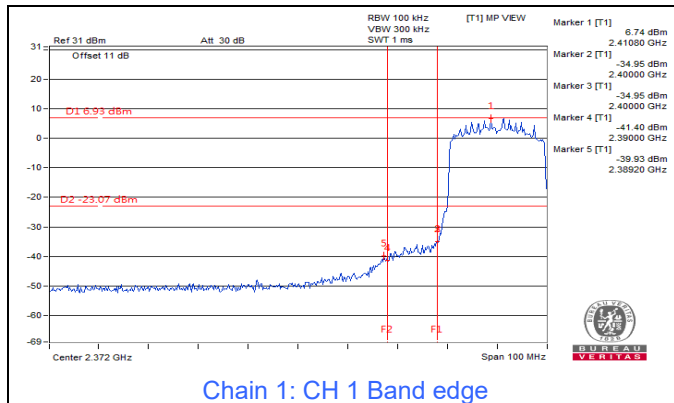


Chain 1: CH 1 Band edge

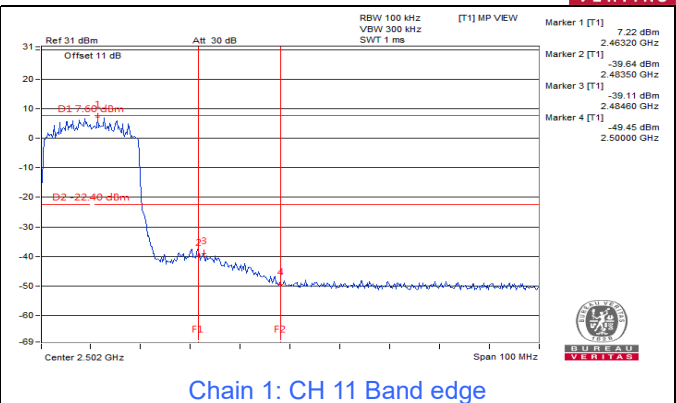

Chain 1: CH 11 Band edge

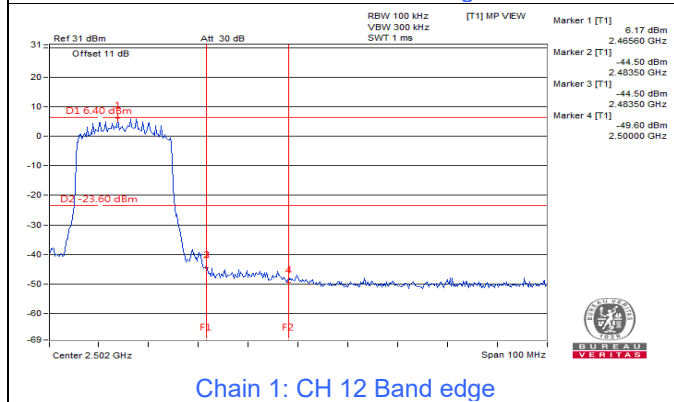










Chain 1: CH 12 Band edge

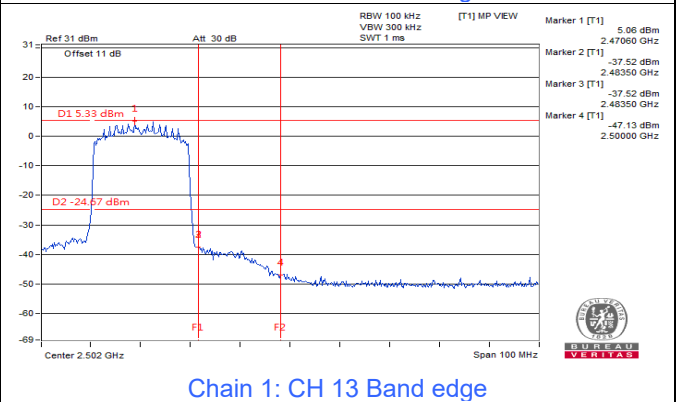

Chain 1: CH 13 Band edge









802.11be (EHT40)

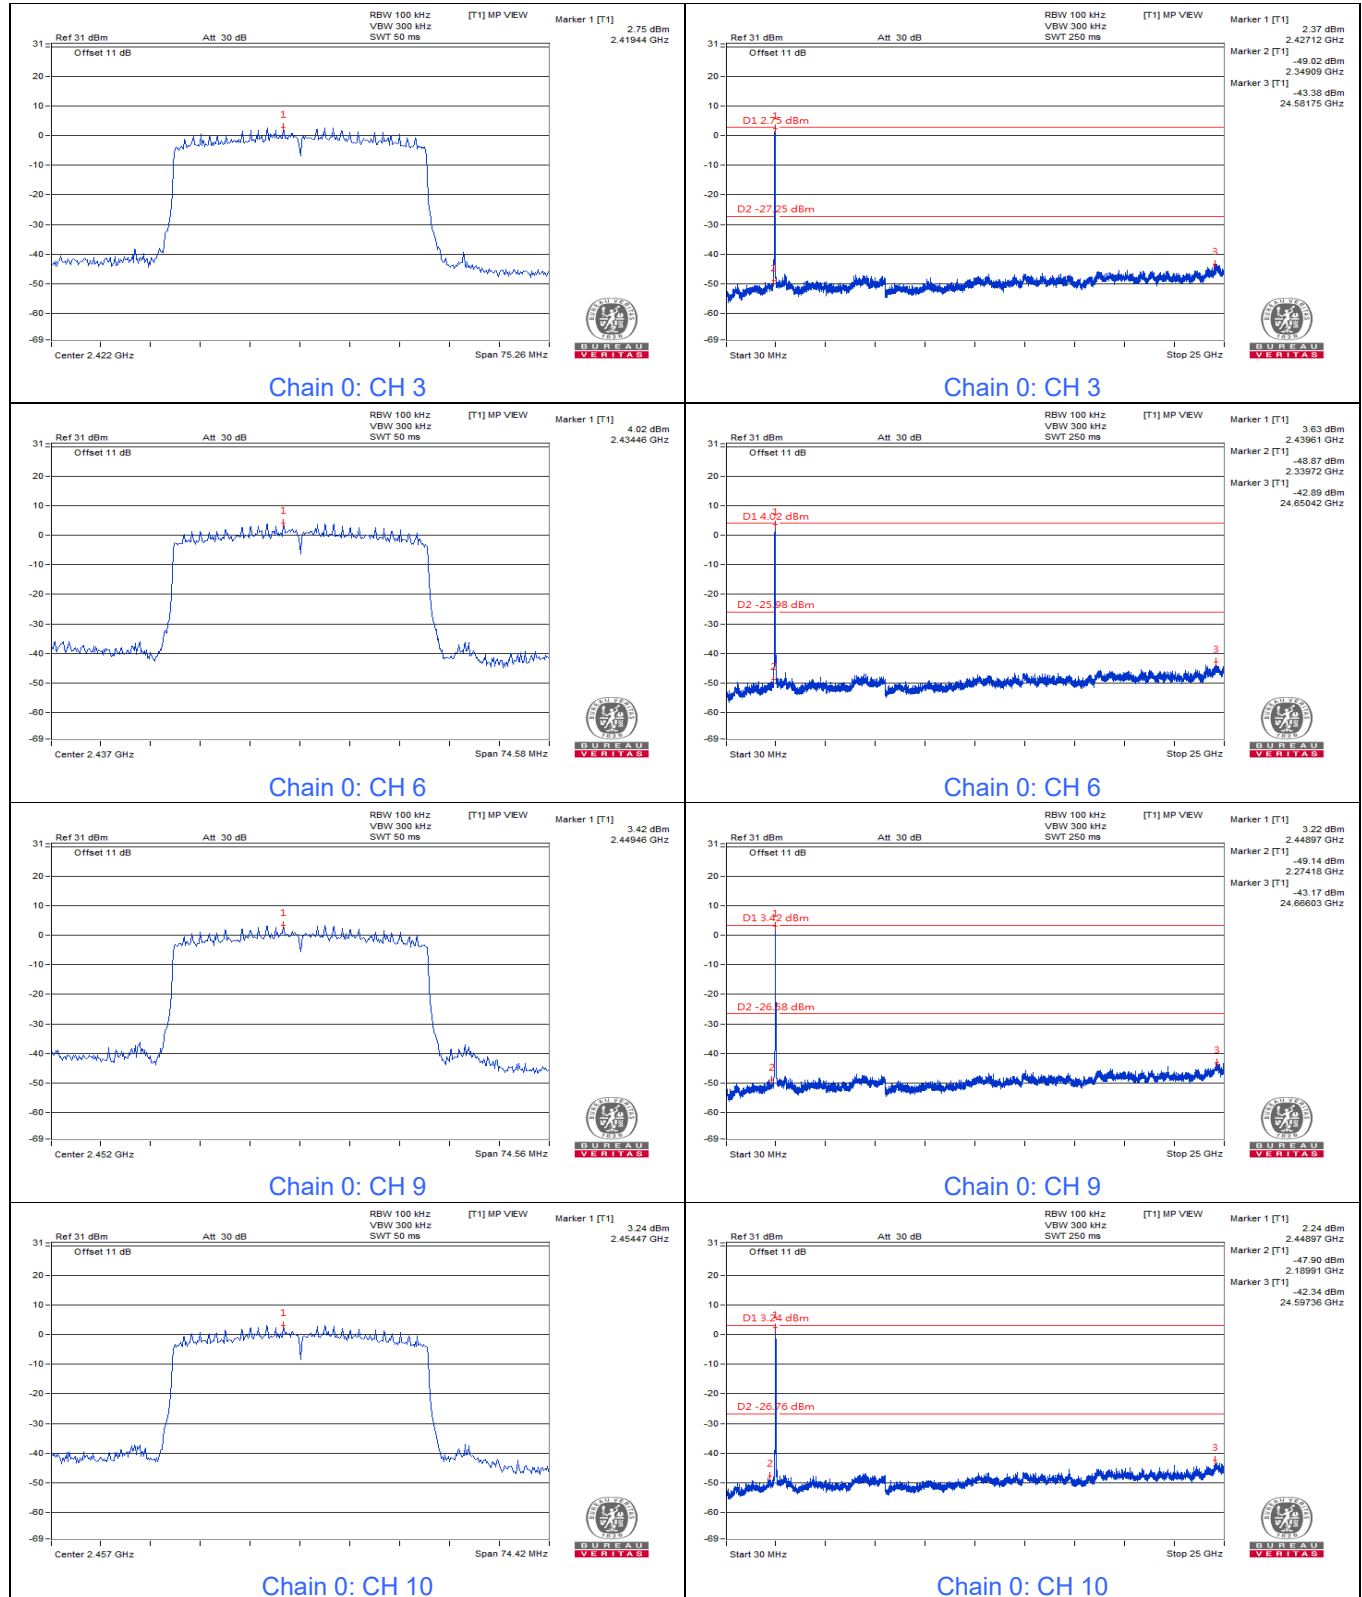


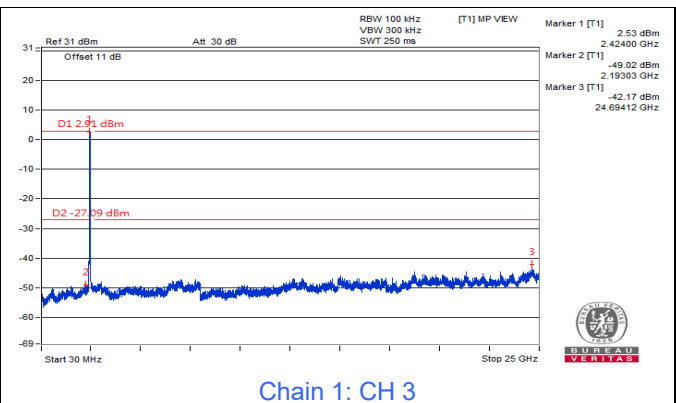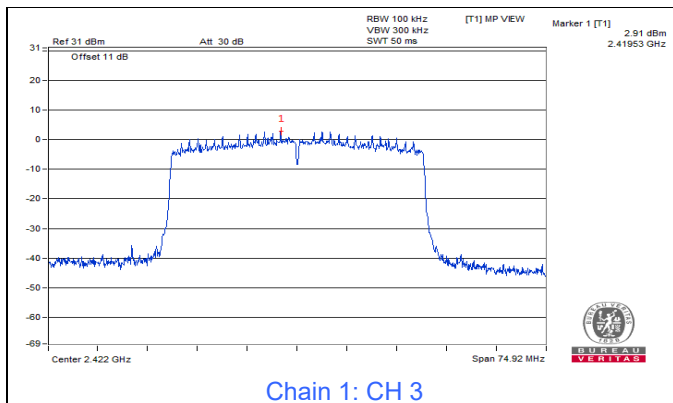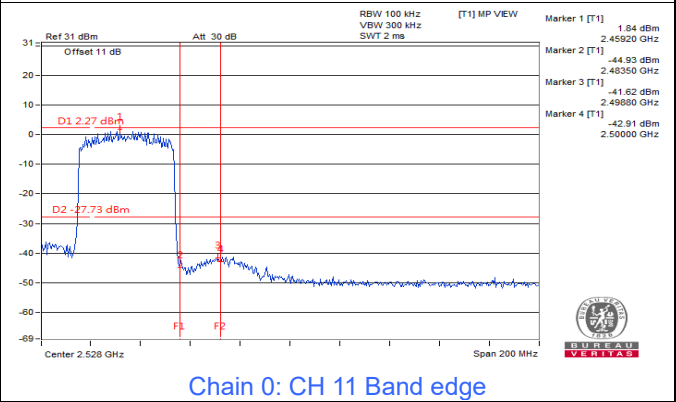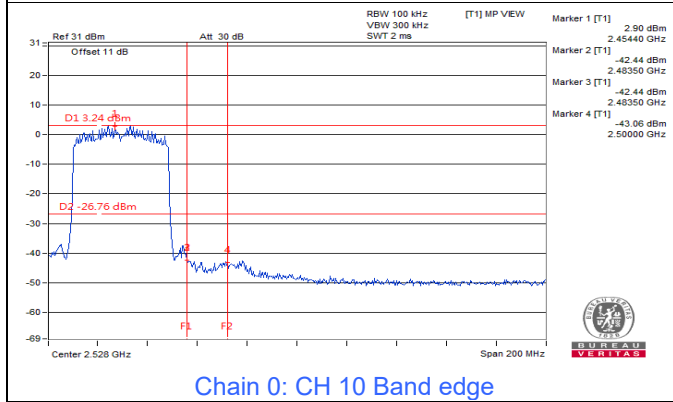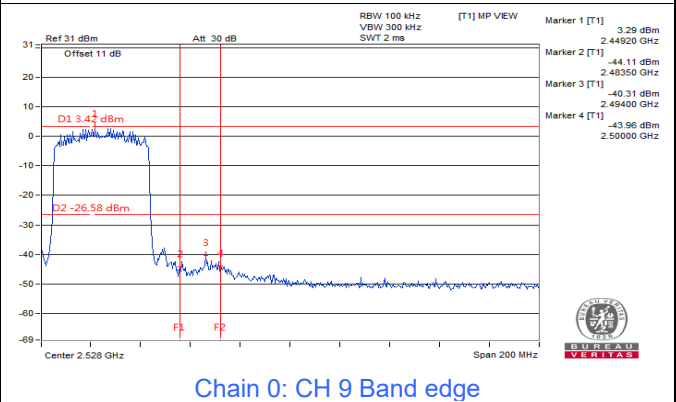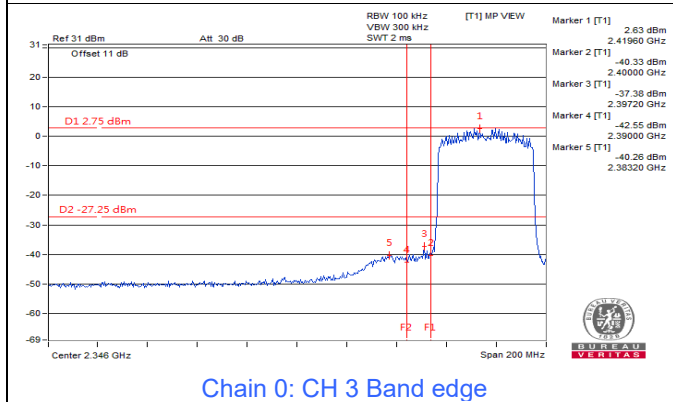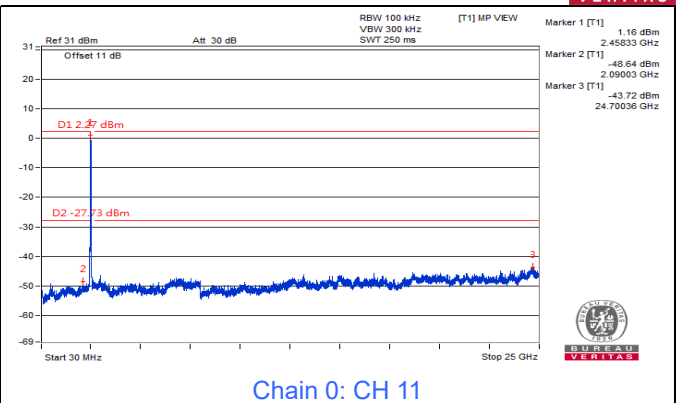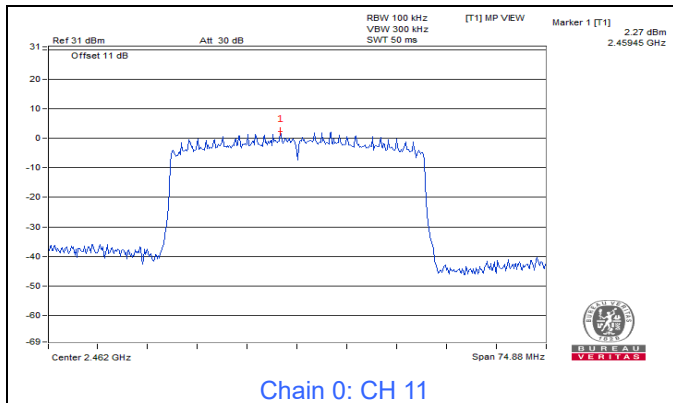




BUREAU
VERITAS

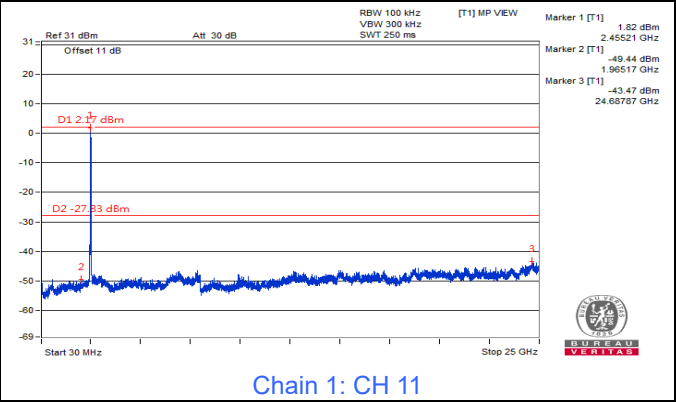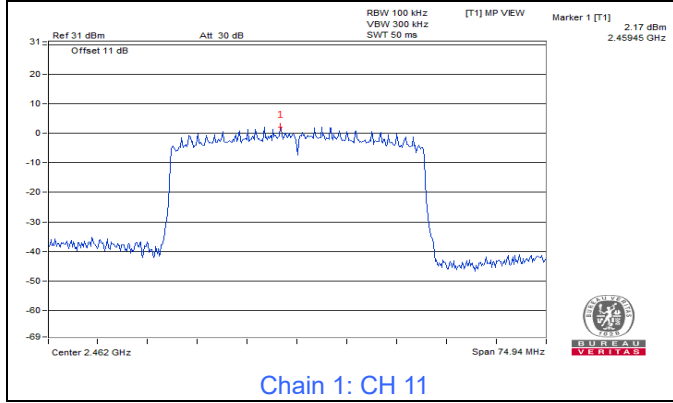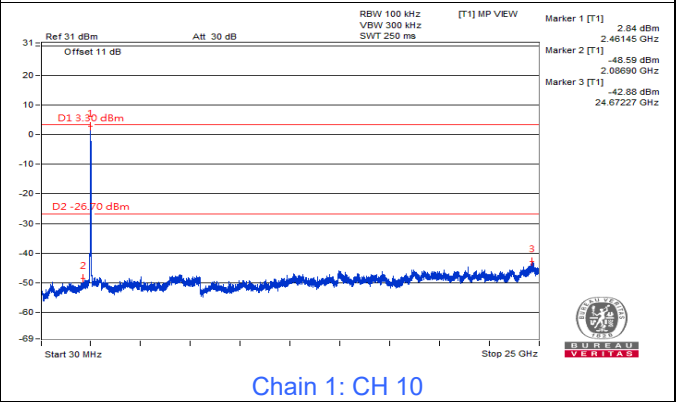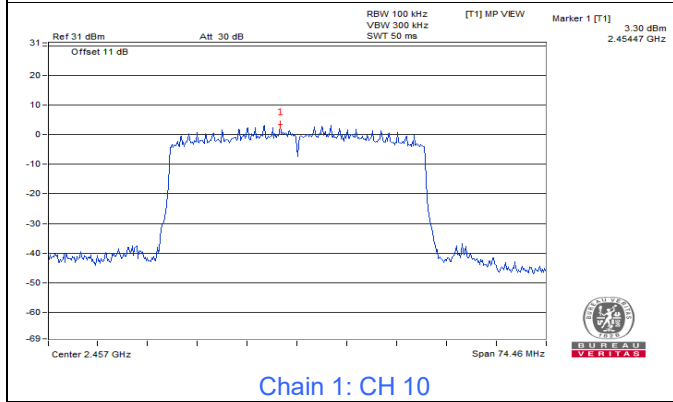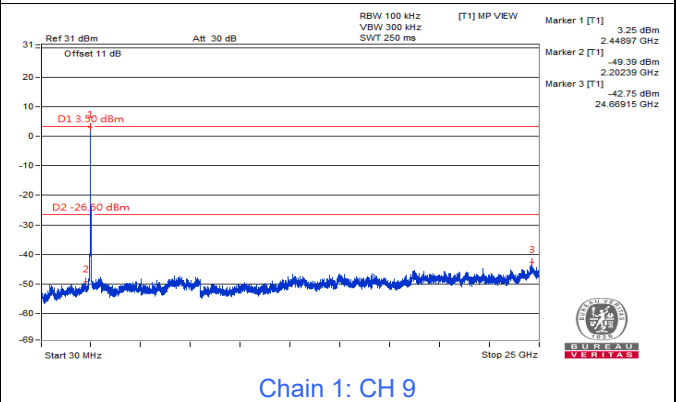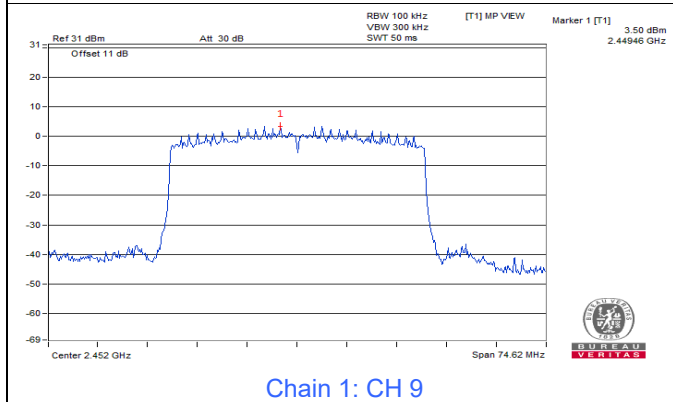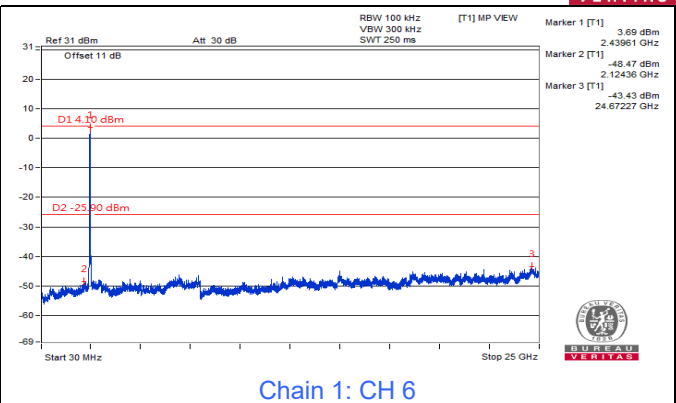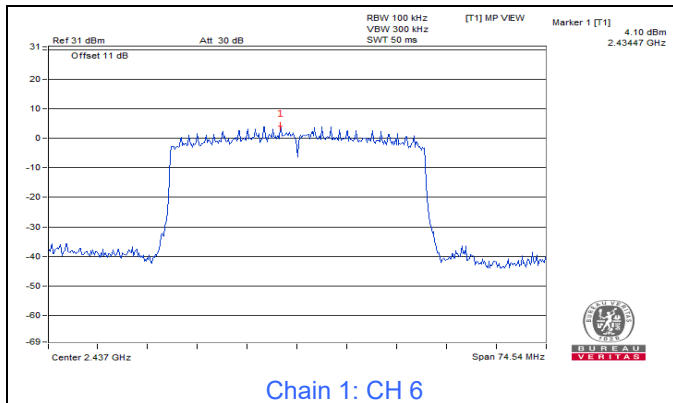


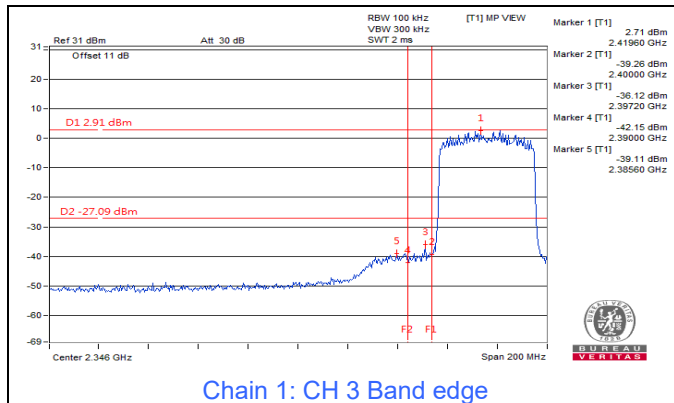


Chain 1: CH 3 Band edge

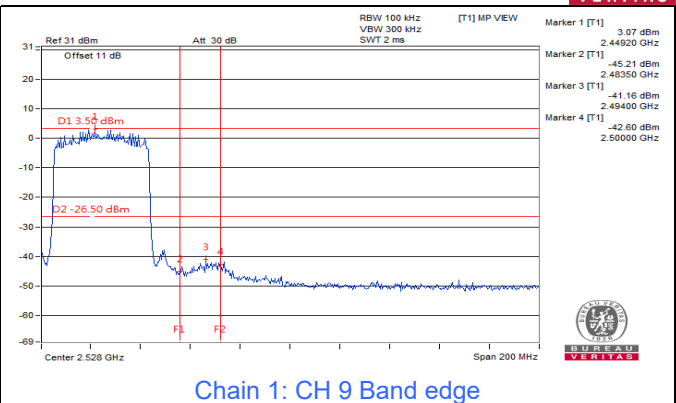

Chain 1: CH 9 Band edge

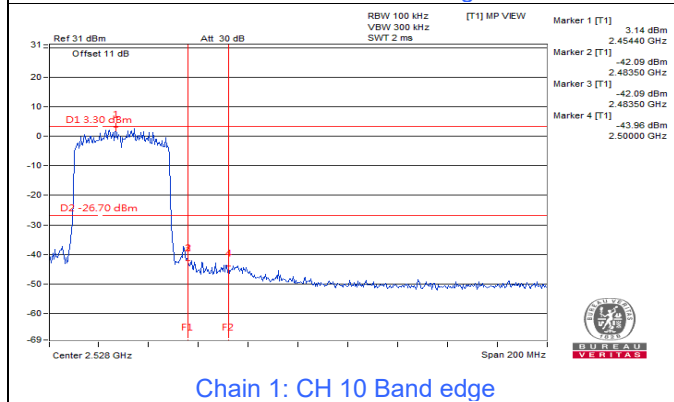










Chain 1: CH 10 Band edge

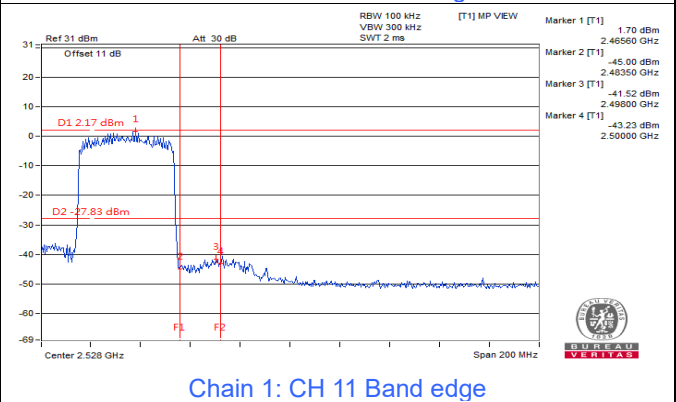

Chain 1: CH 11 Band edge


802.11be (EHT20) 26-tone RU

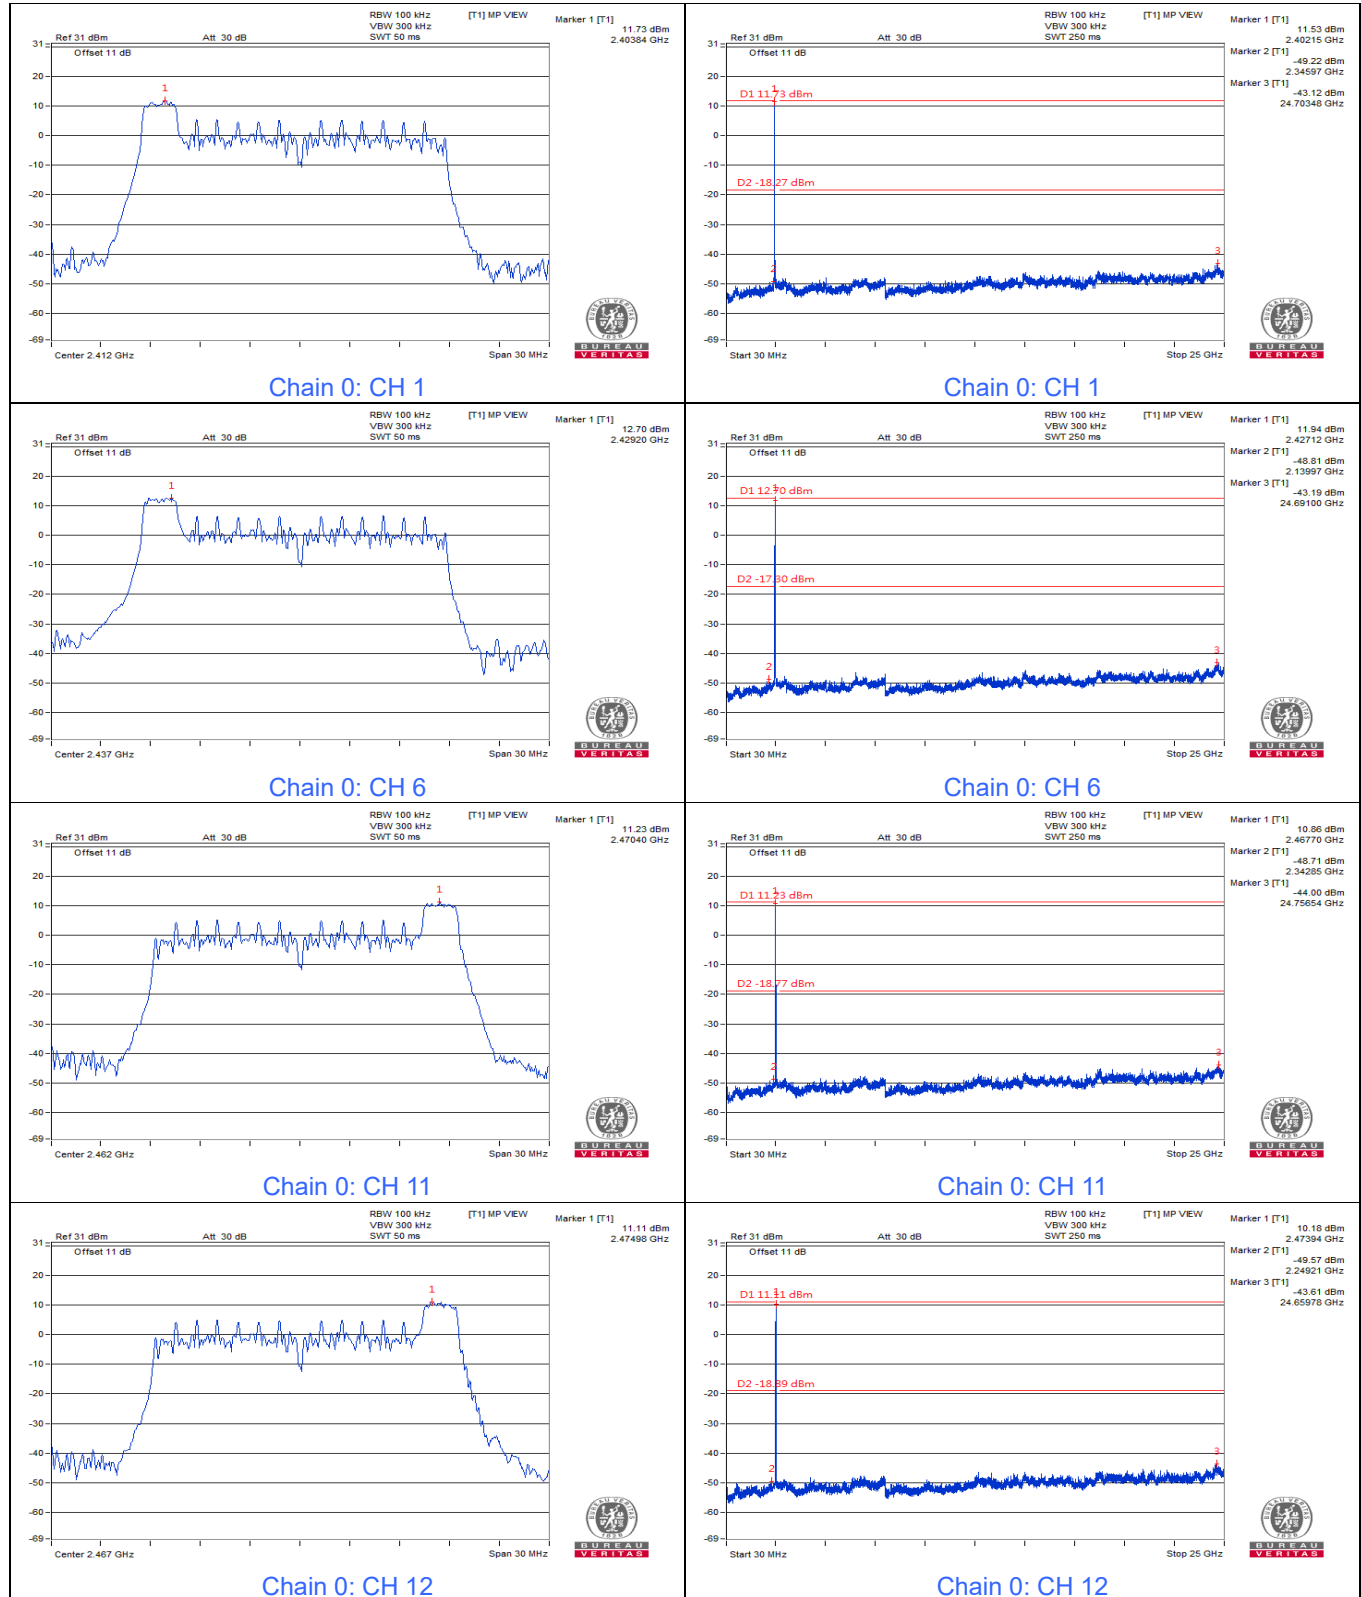

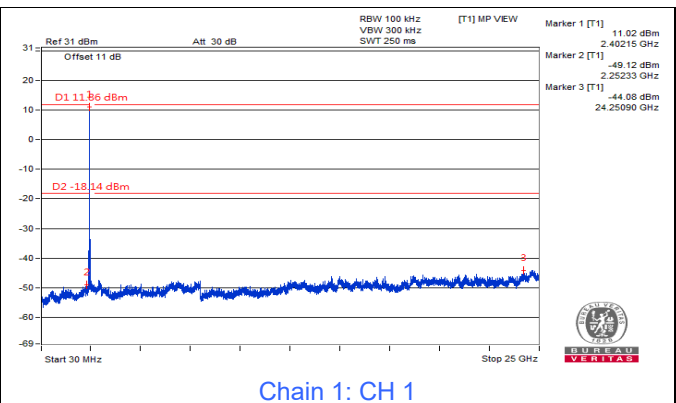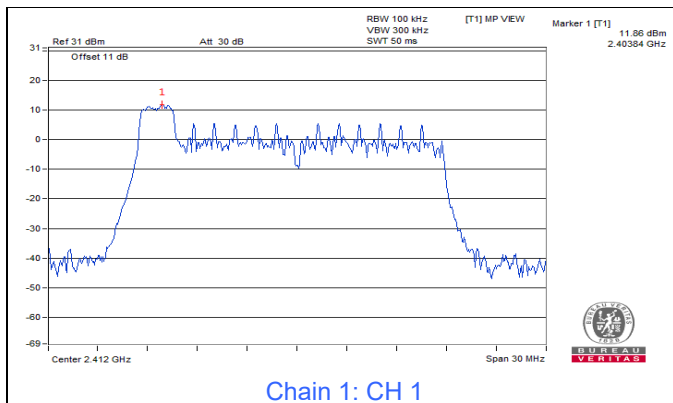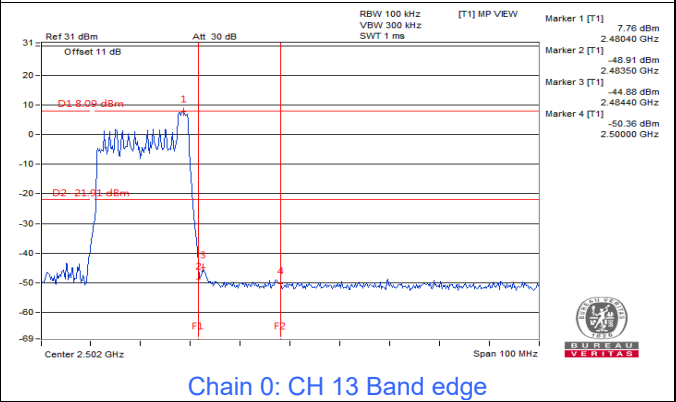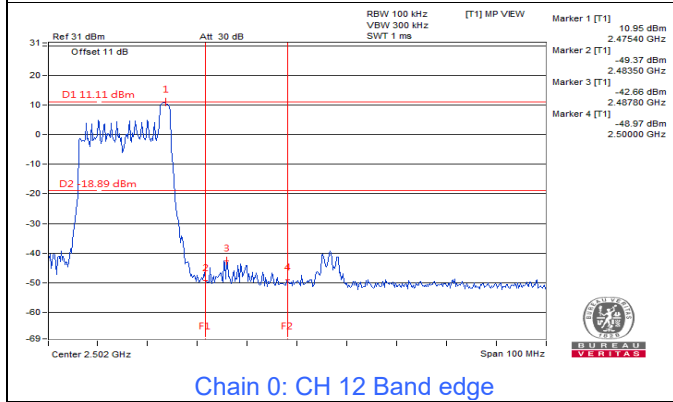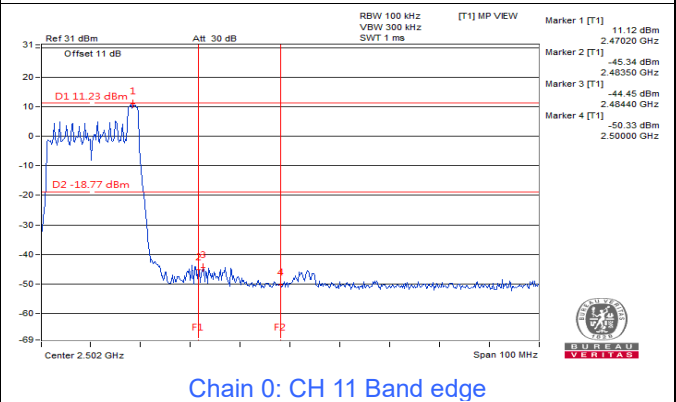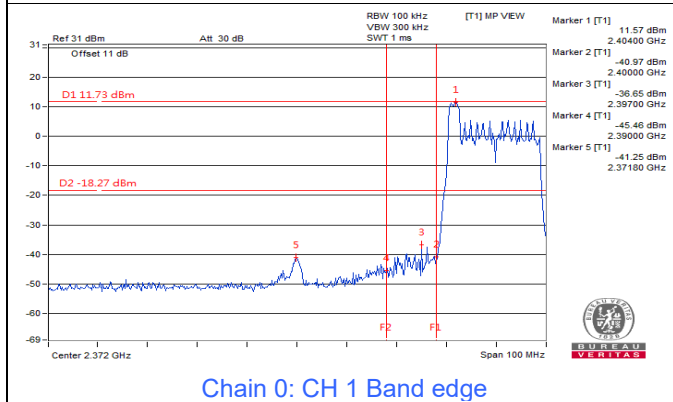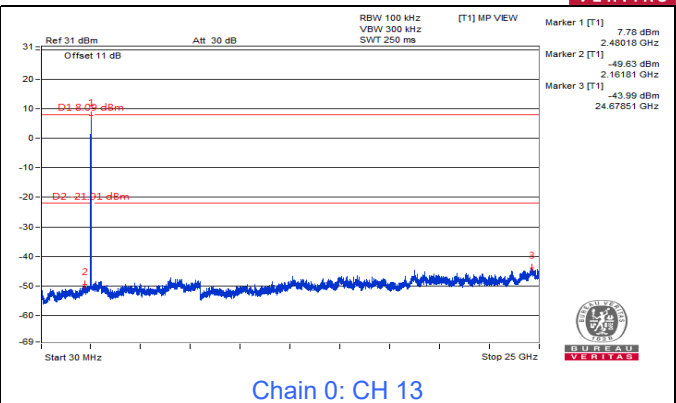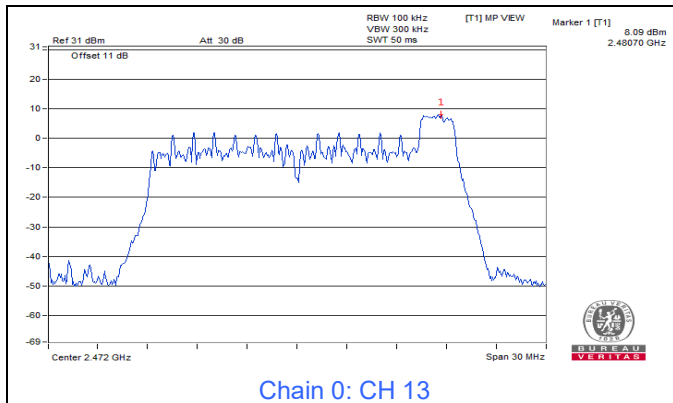





BUREAU
VERITAS

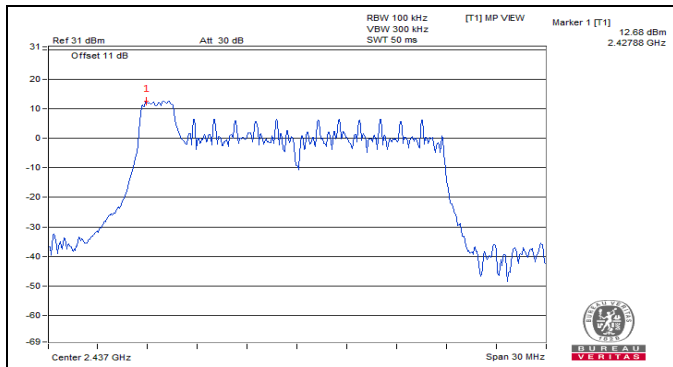


Chain 1: CH 6

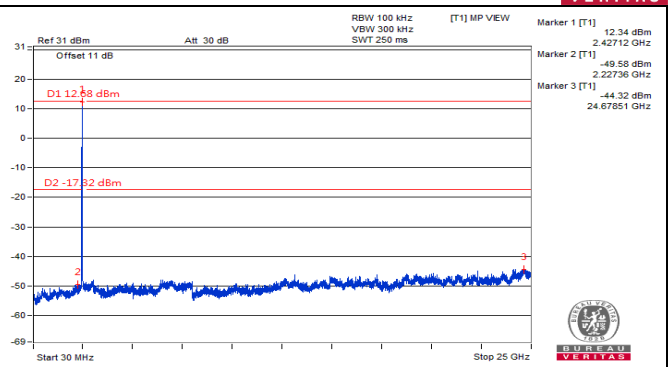


Chain 1: CH 6

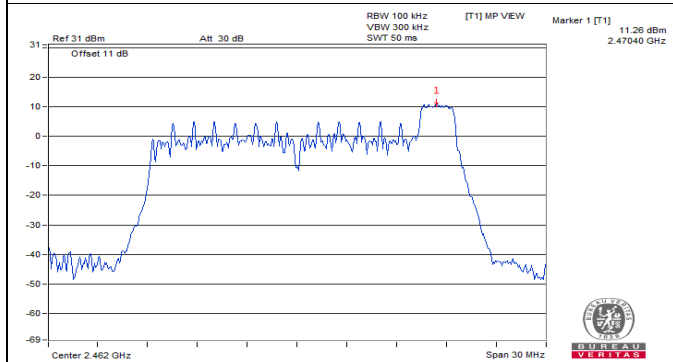


Chain 1: CH 11

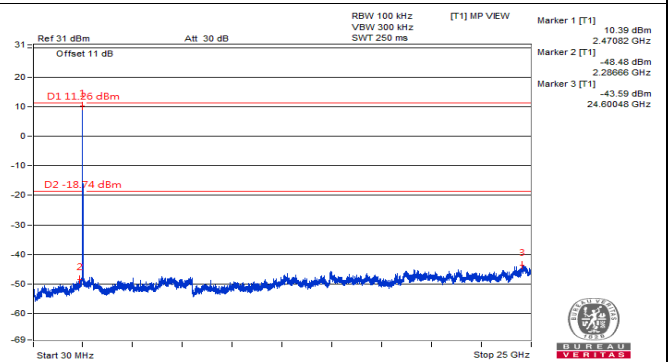


Chain 1: CH 11

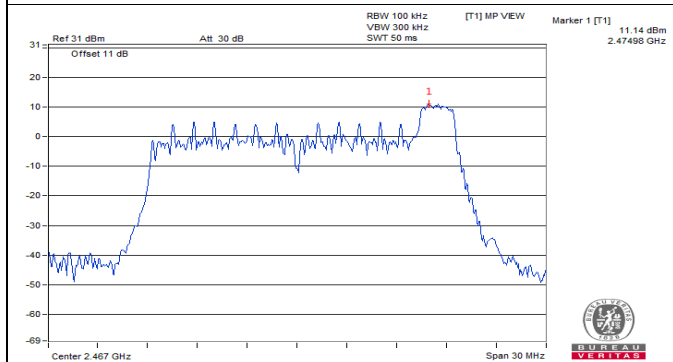


Chain 1: CH 12

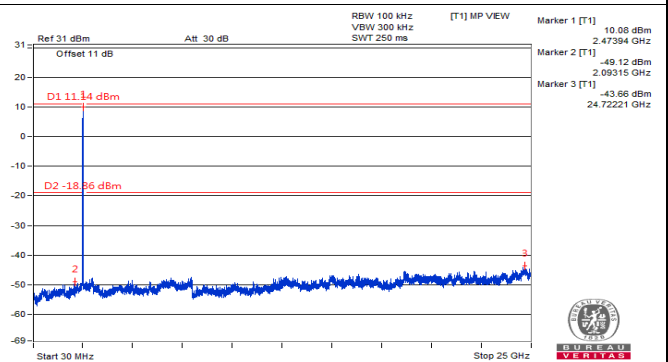





Chain 1: CH 12

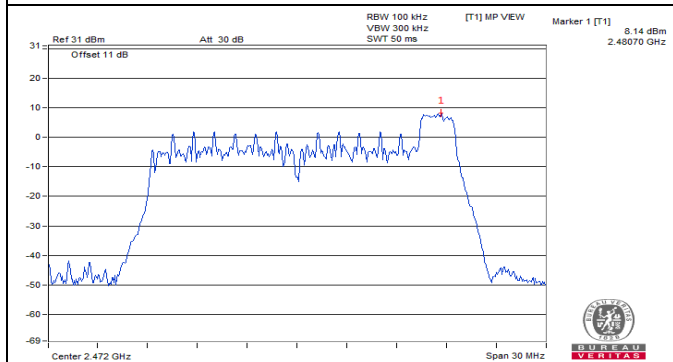


Chain 1: CH 13








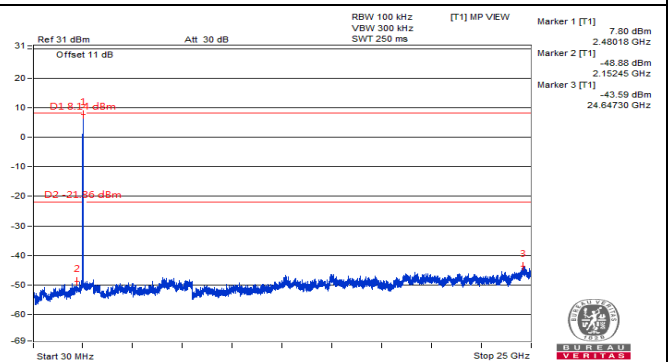


Chain 1: CH 13

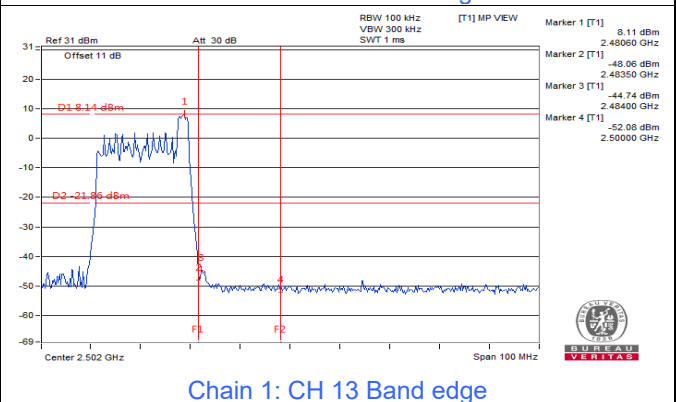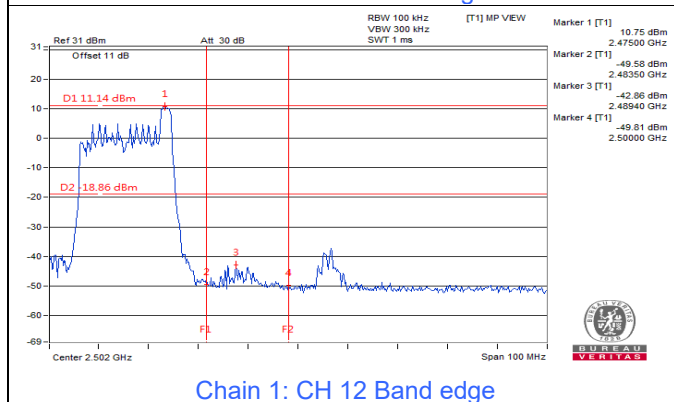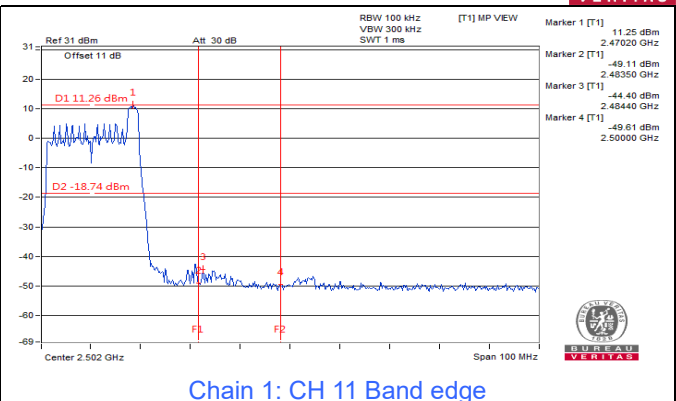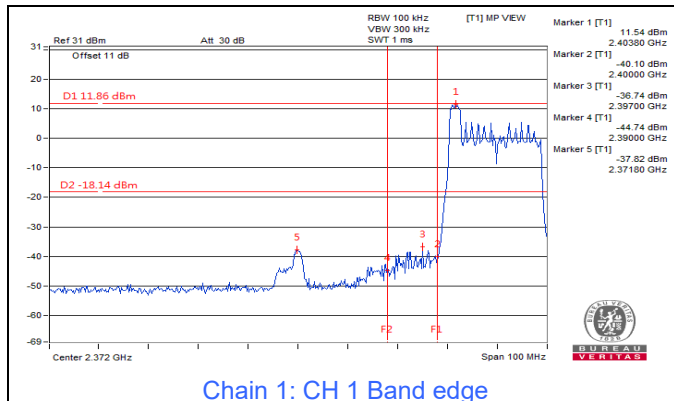


802.11be (EHT20) 52-tone RU

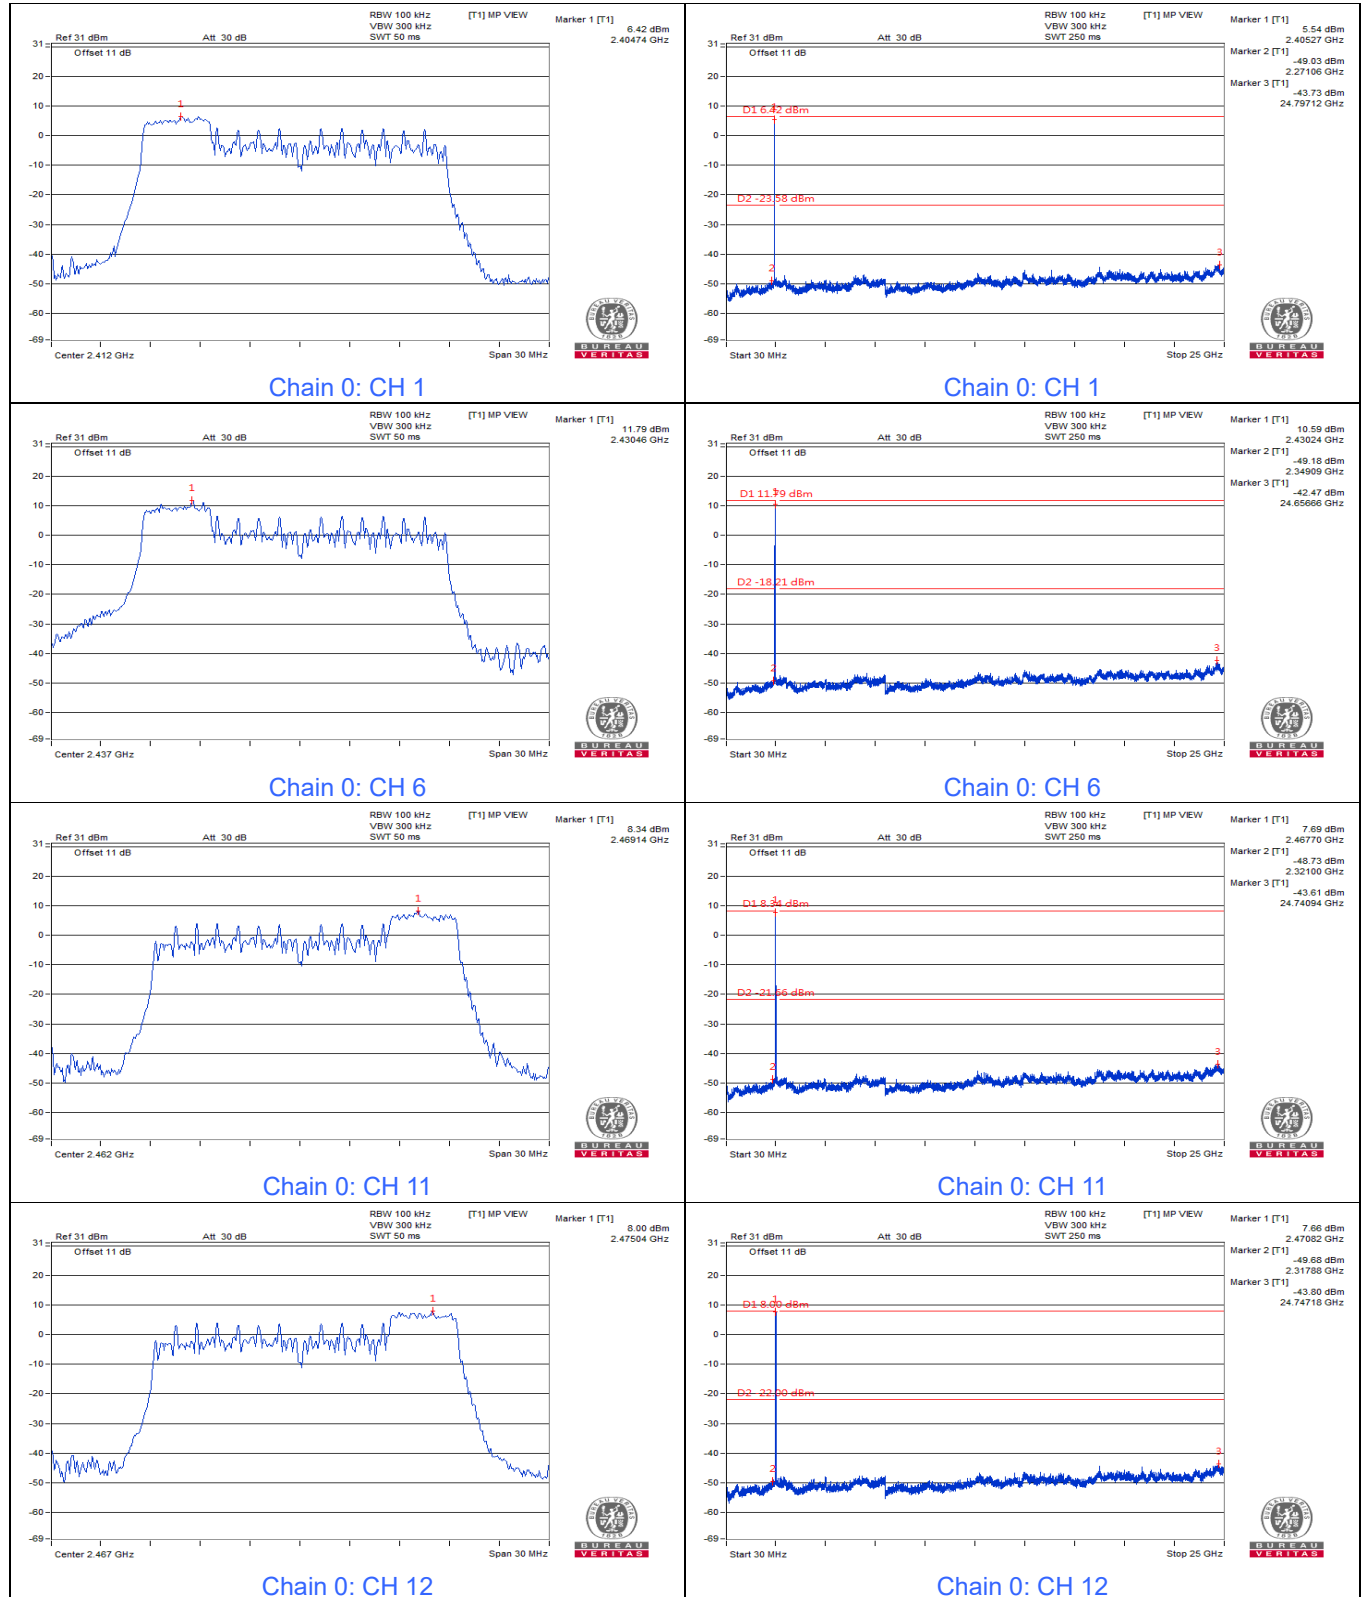

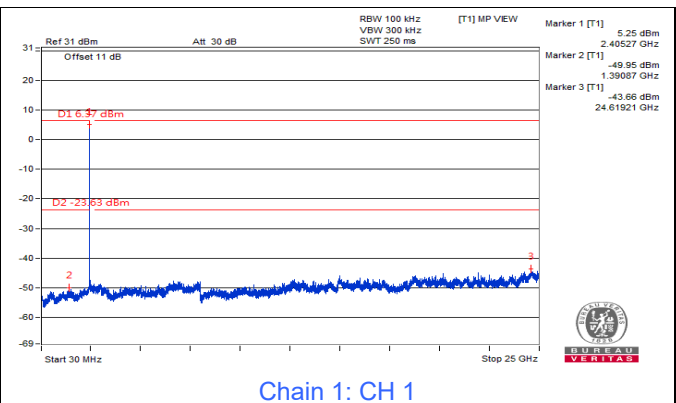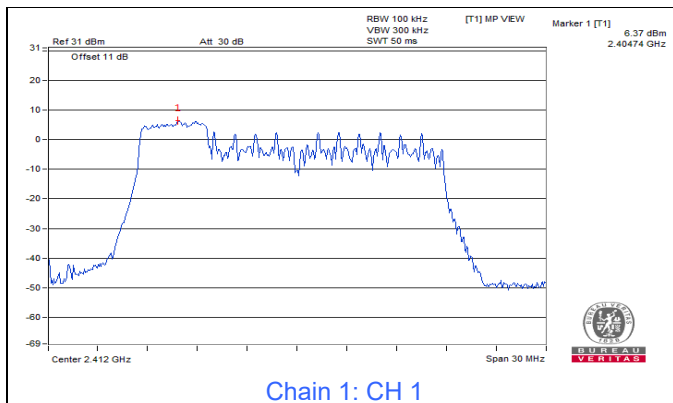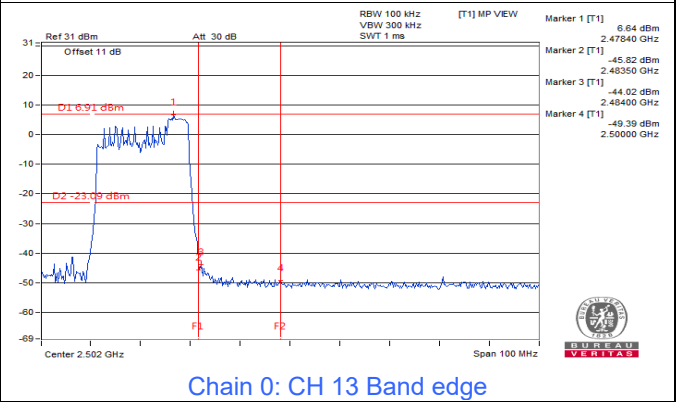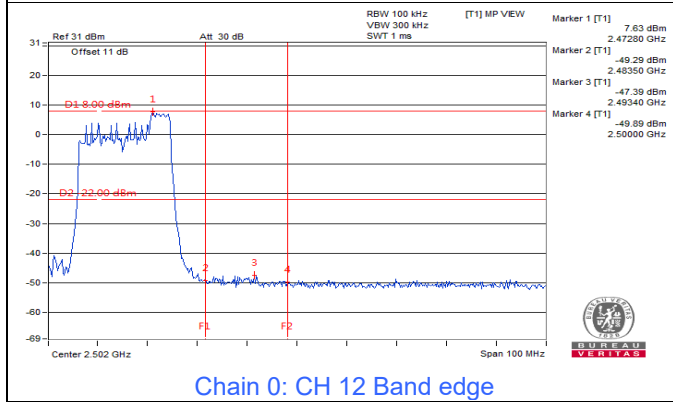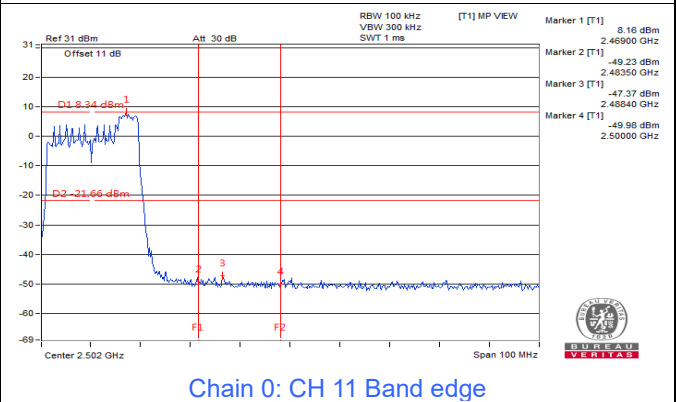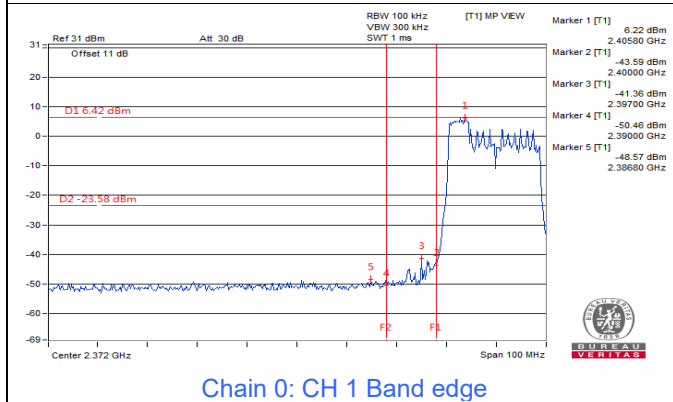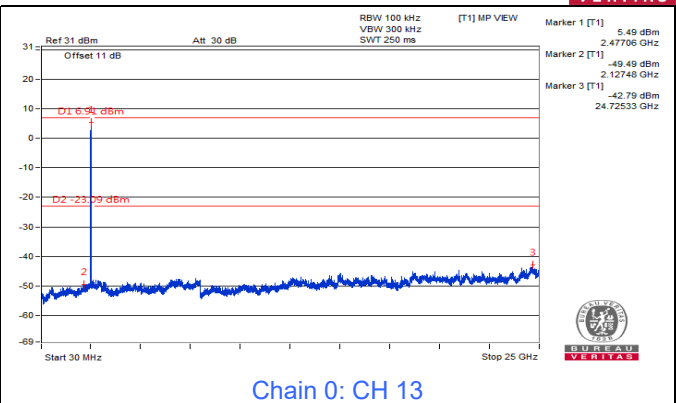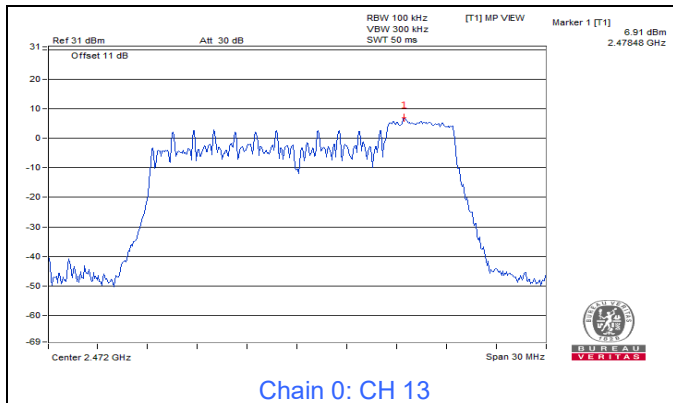





BUREAU
VERITAS

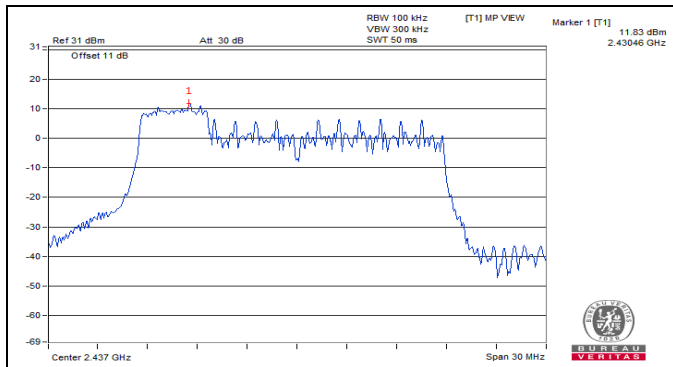


Chain 1: CH 6

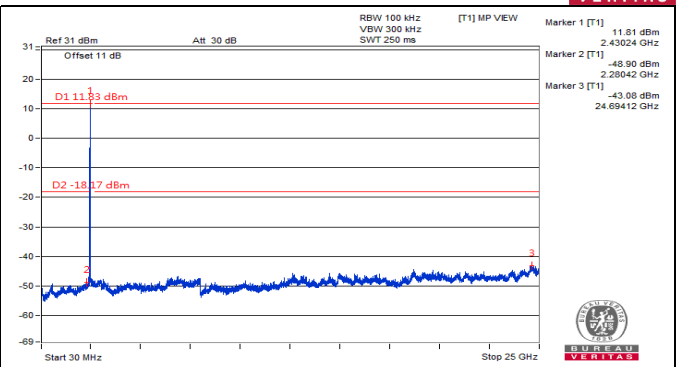


Chain 1: CH 6

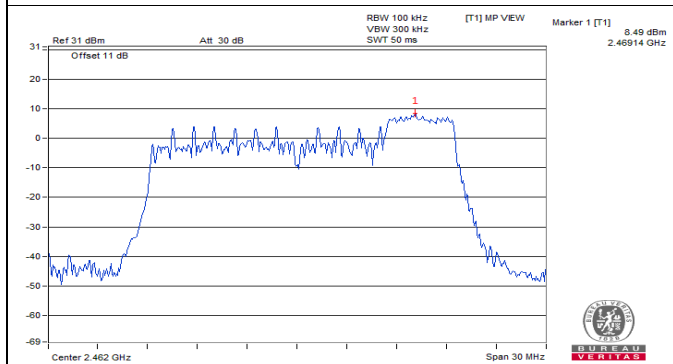


Chain 1: CH 11

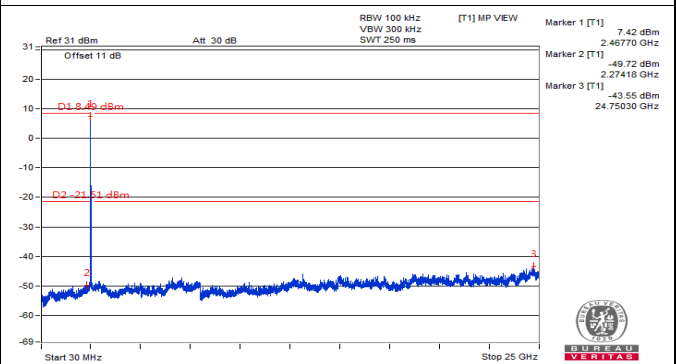


Chain 1: CH 11

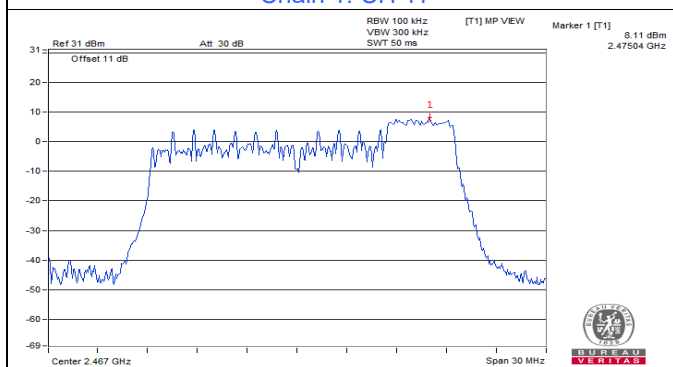


Chain 1: CH 12

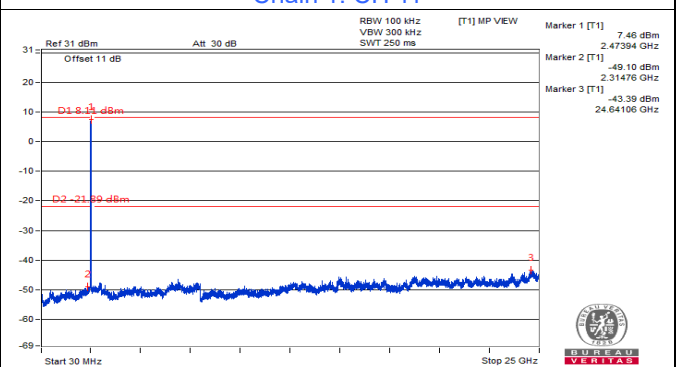


Chain 1: CH 12

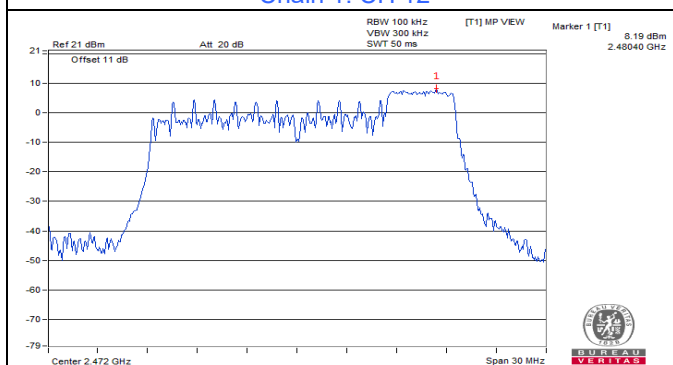


Chain 1: CH 13

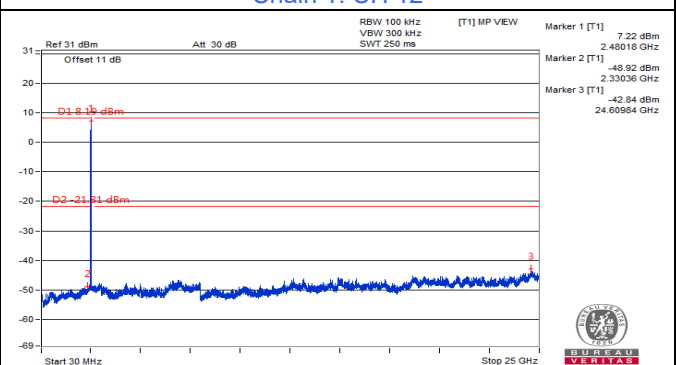


Chain 1: CH 13

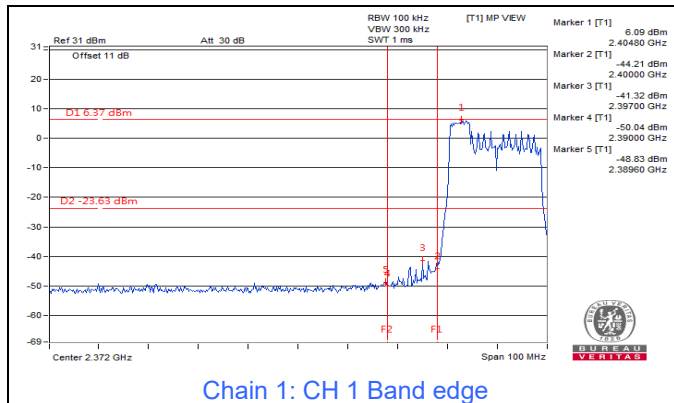


Chain 1: CH 1 Band edge

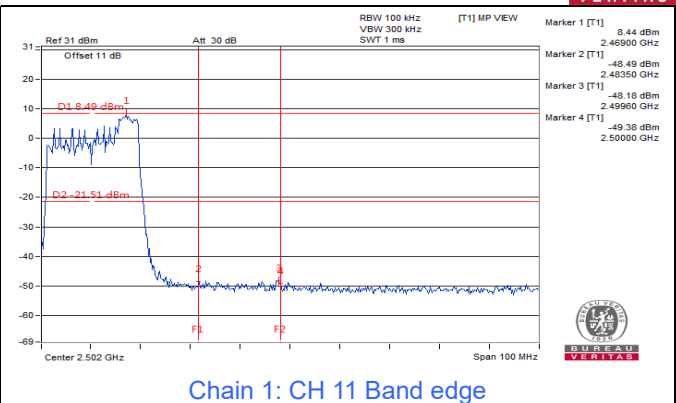

Chain 1: CH 11 Band edge

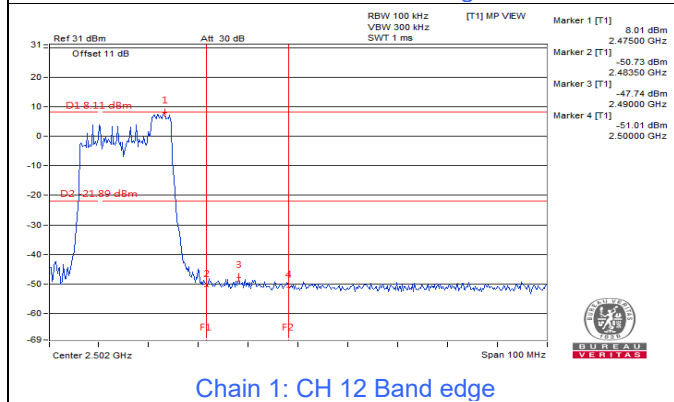










Chain 1: CH 12 Band edge

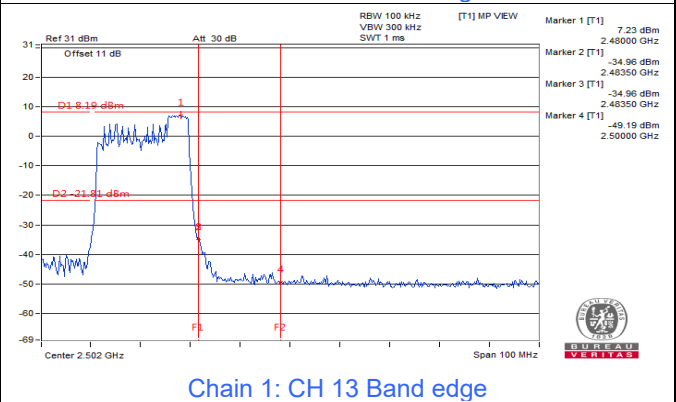

Chain 1: CH 13 Band edge









802.11be (EHT20) 106-tone RU

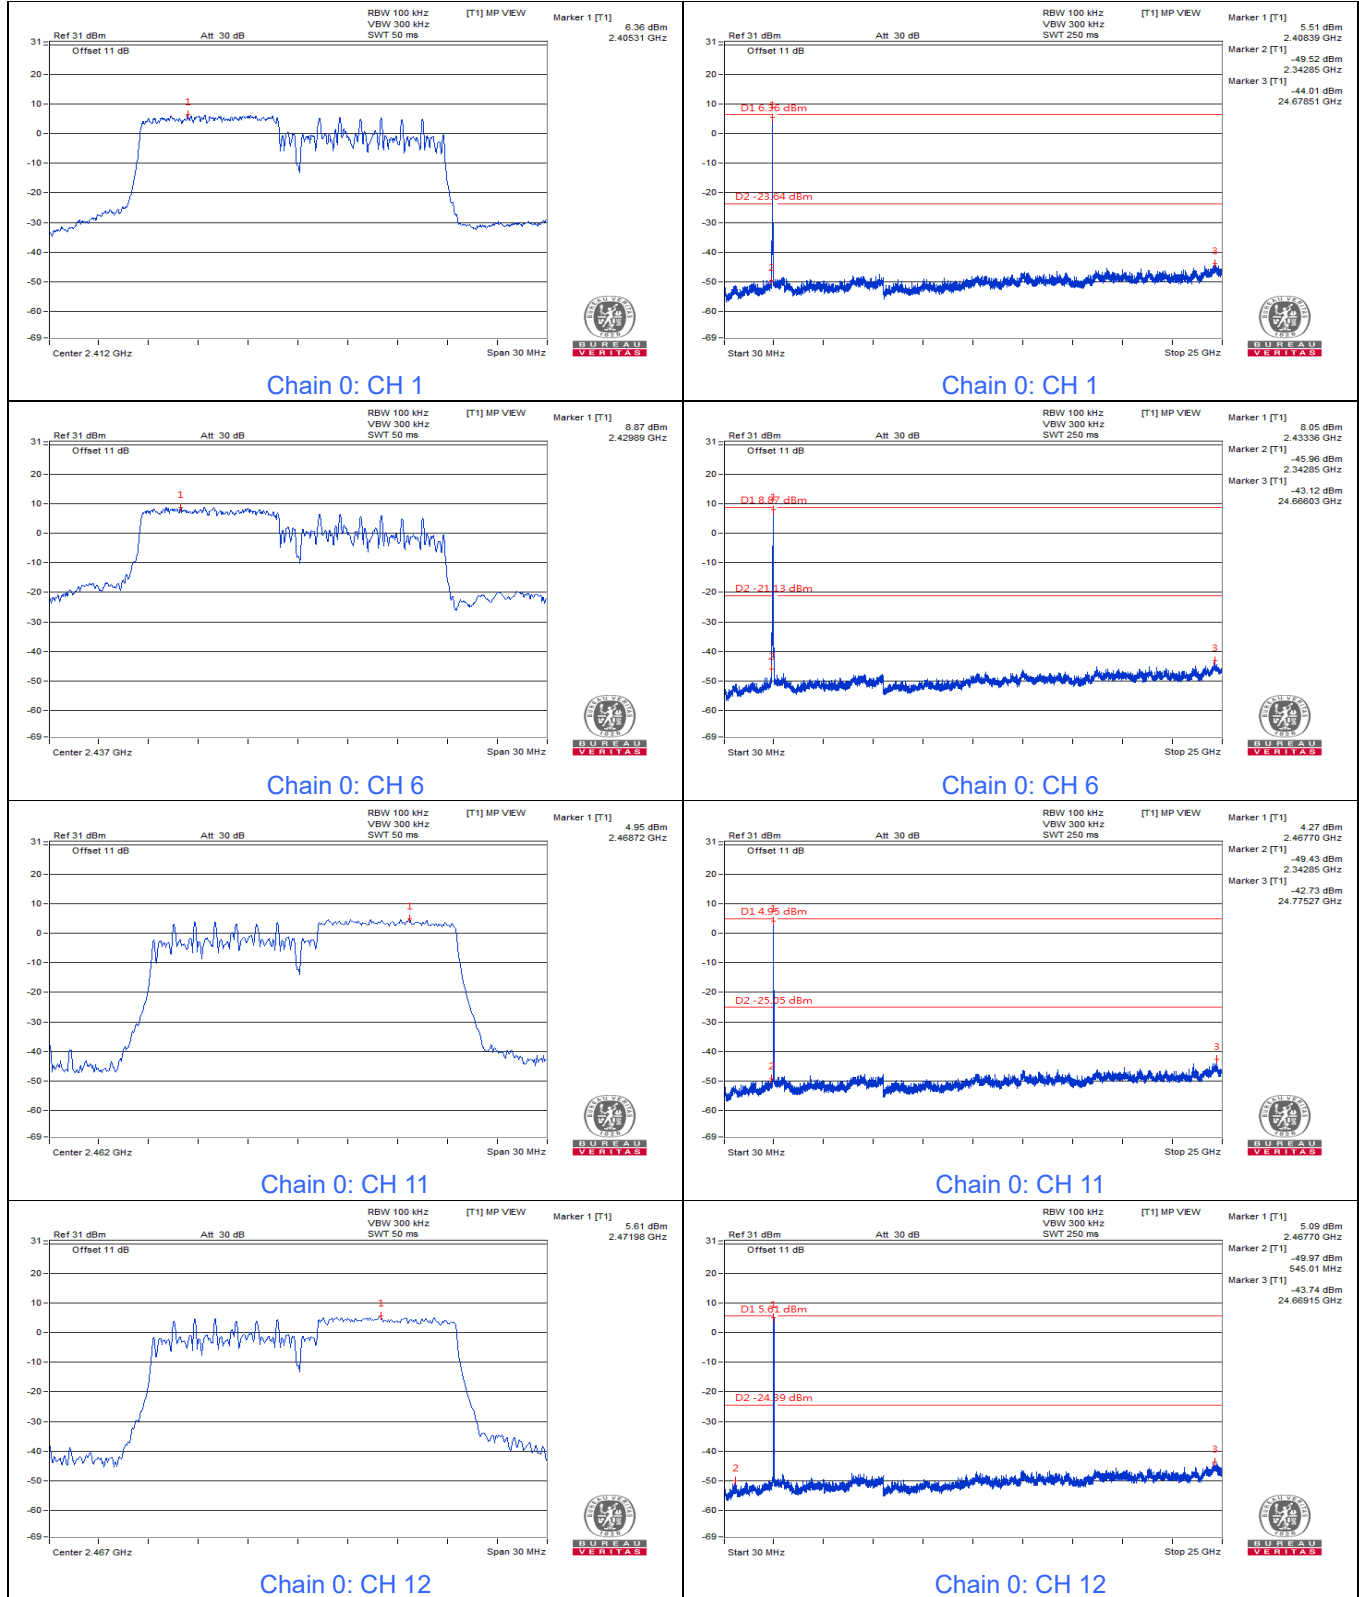


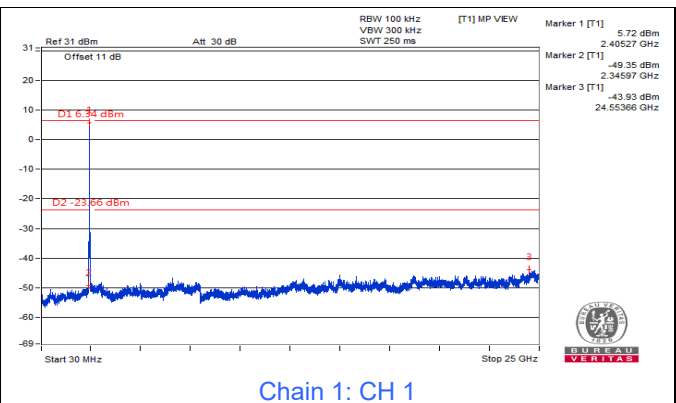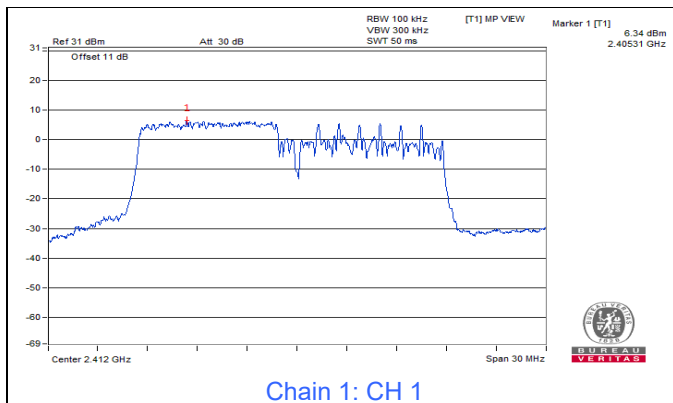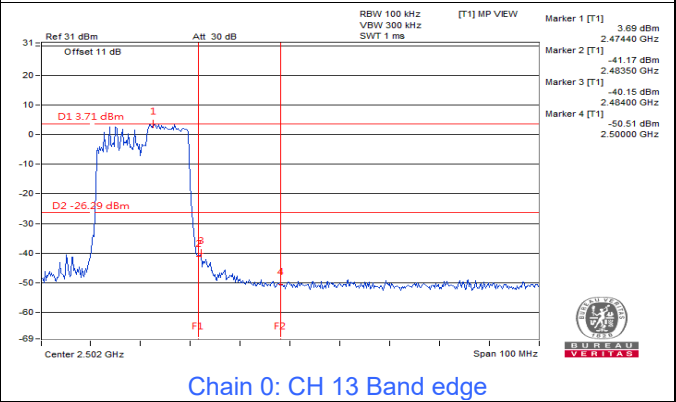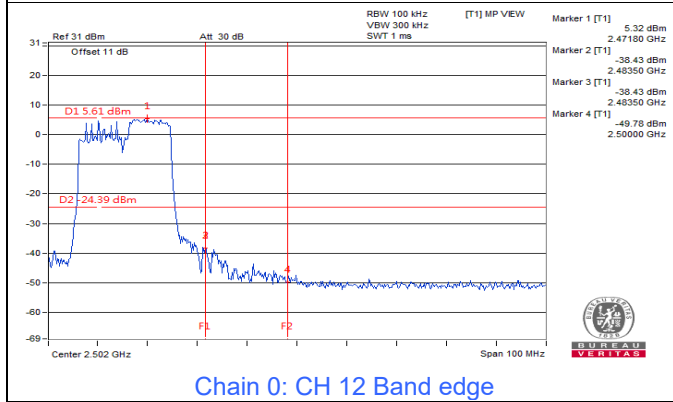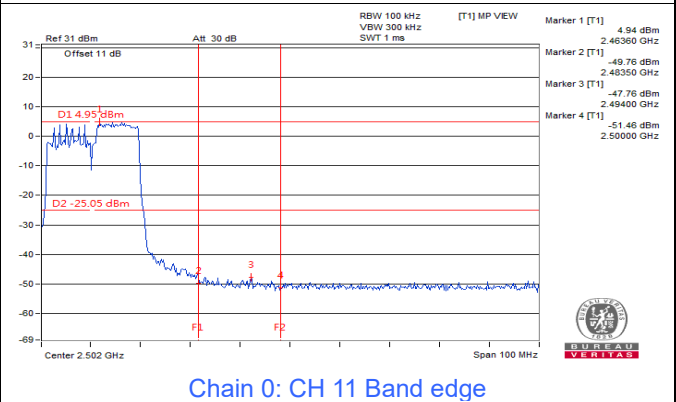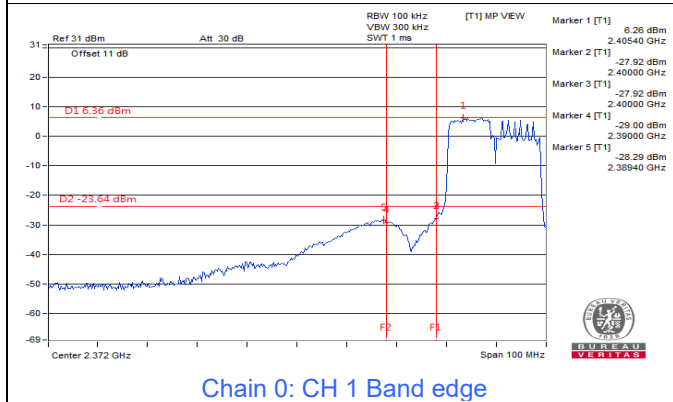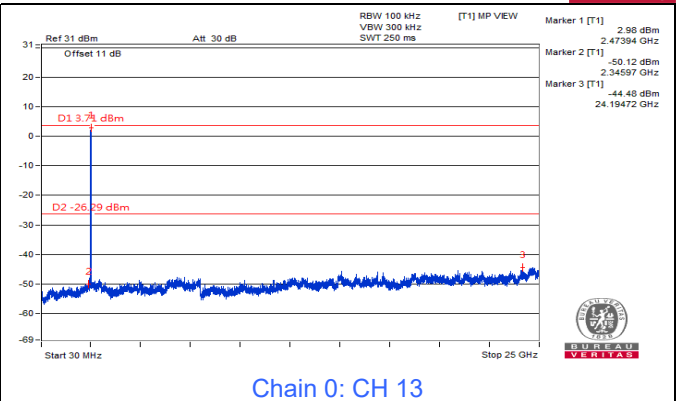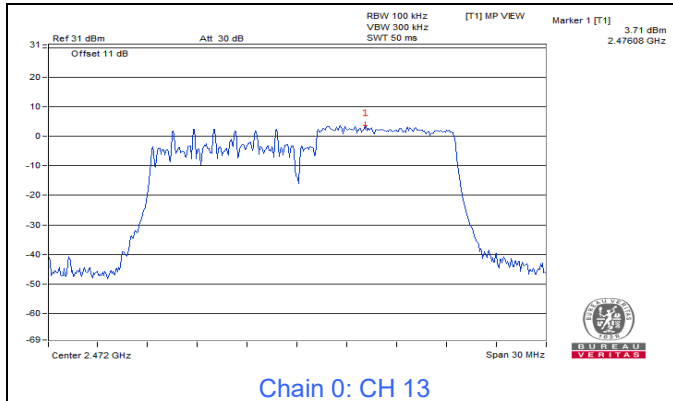




BUREAU
VERITAS

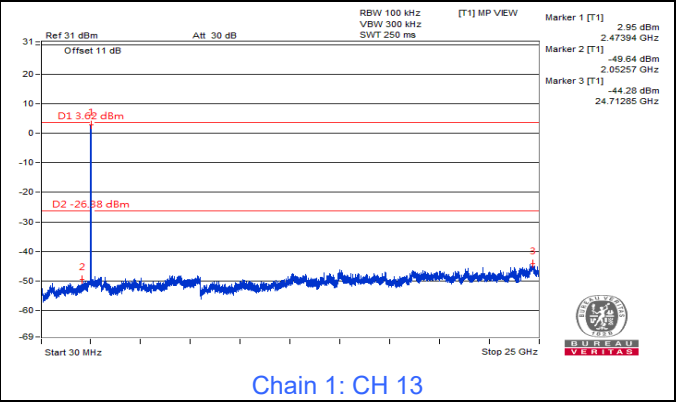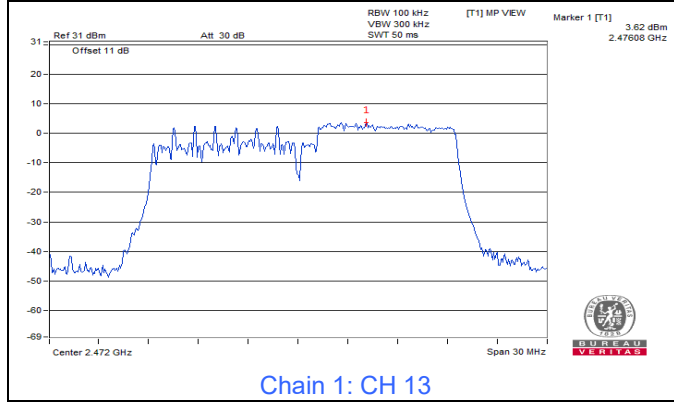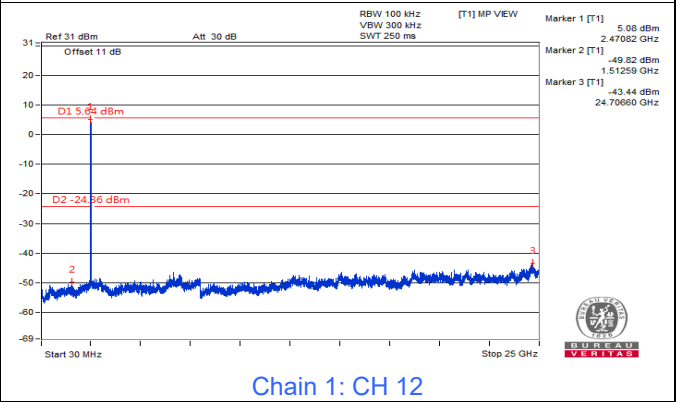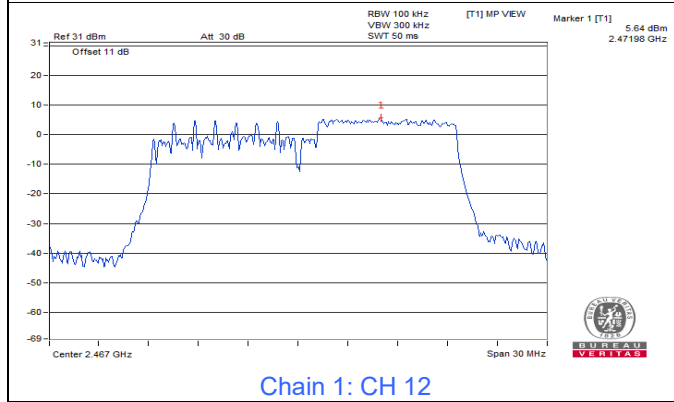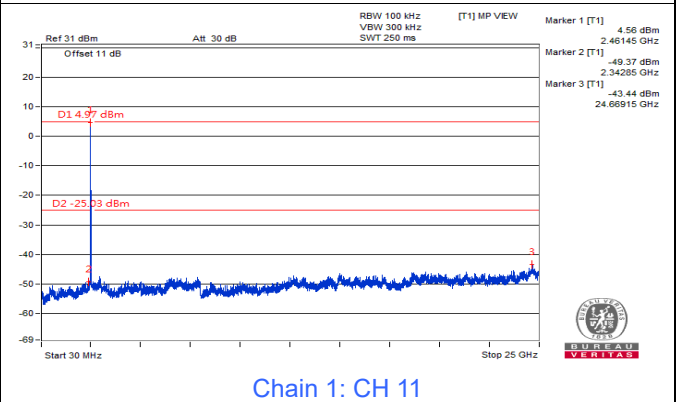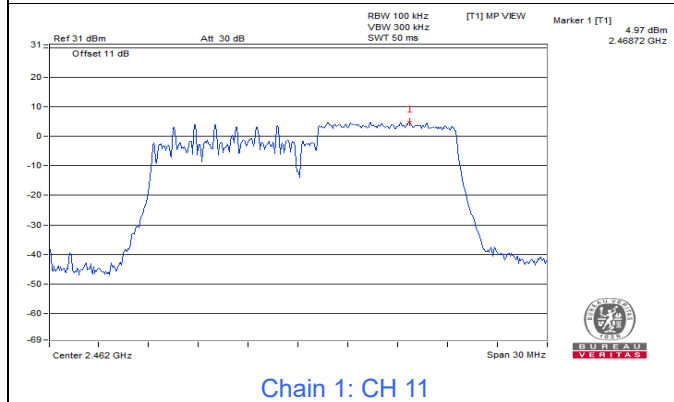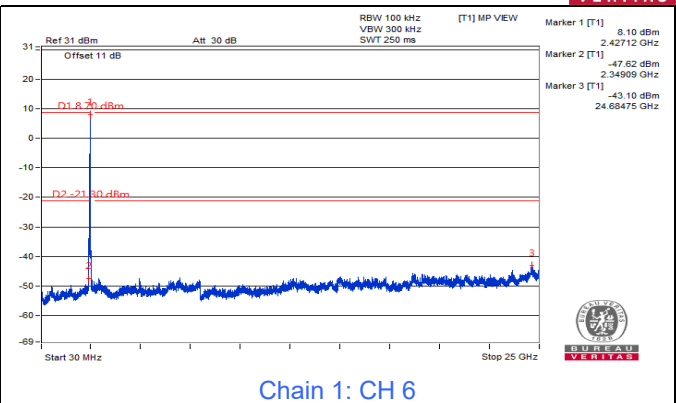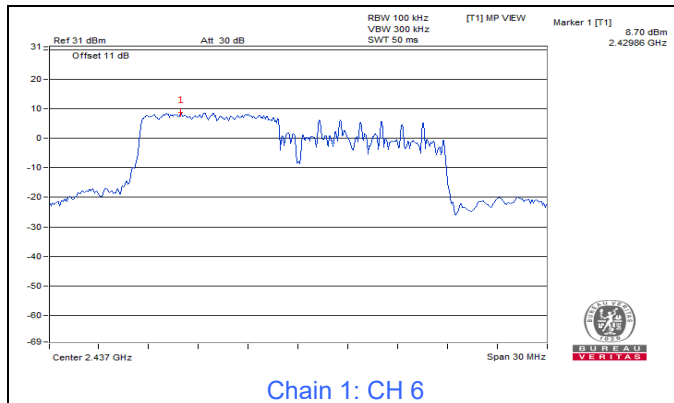


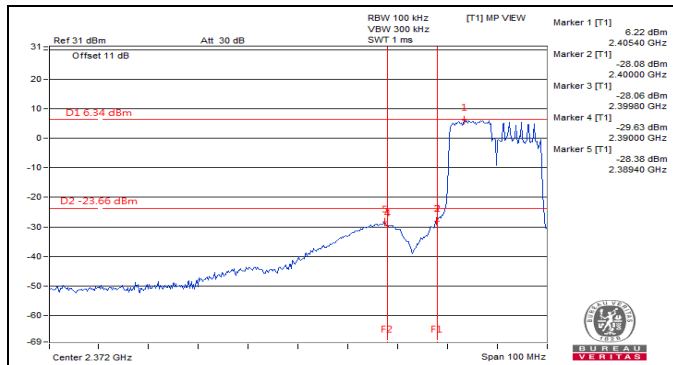


Chain 1: CH 1 Band edge

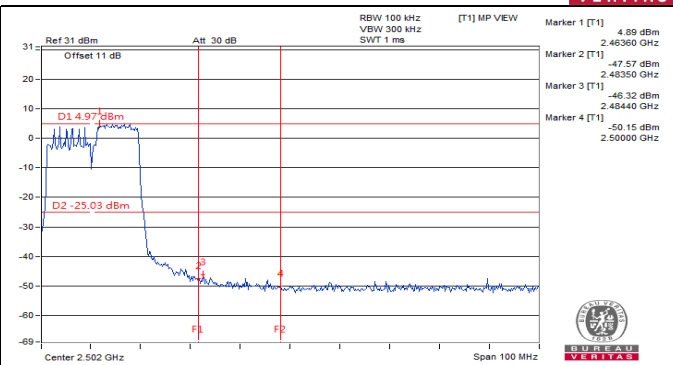

Chain 1: CH 11 Band edge

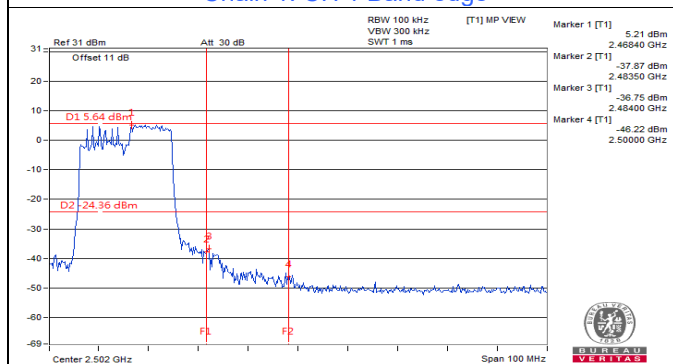










Chain 1: CH 12 Band edge

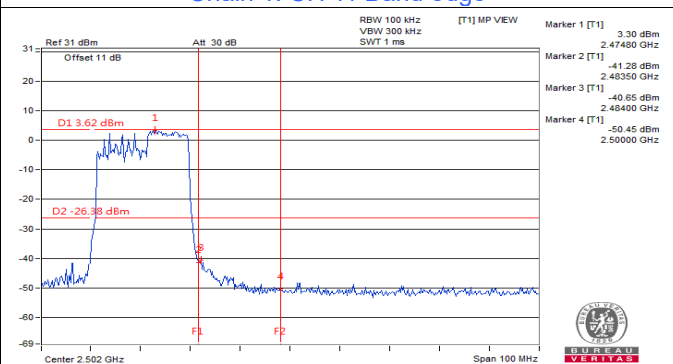

Chain 1: CH 13 Band edge


802.11be (EHT20) 52+26-tone MRU

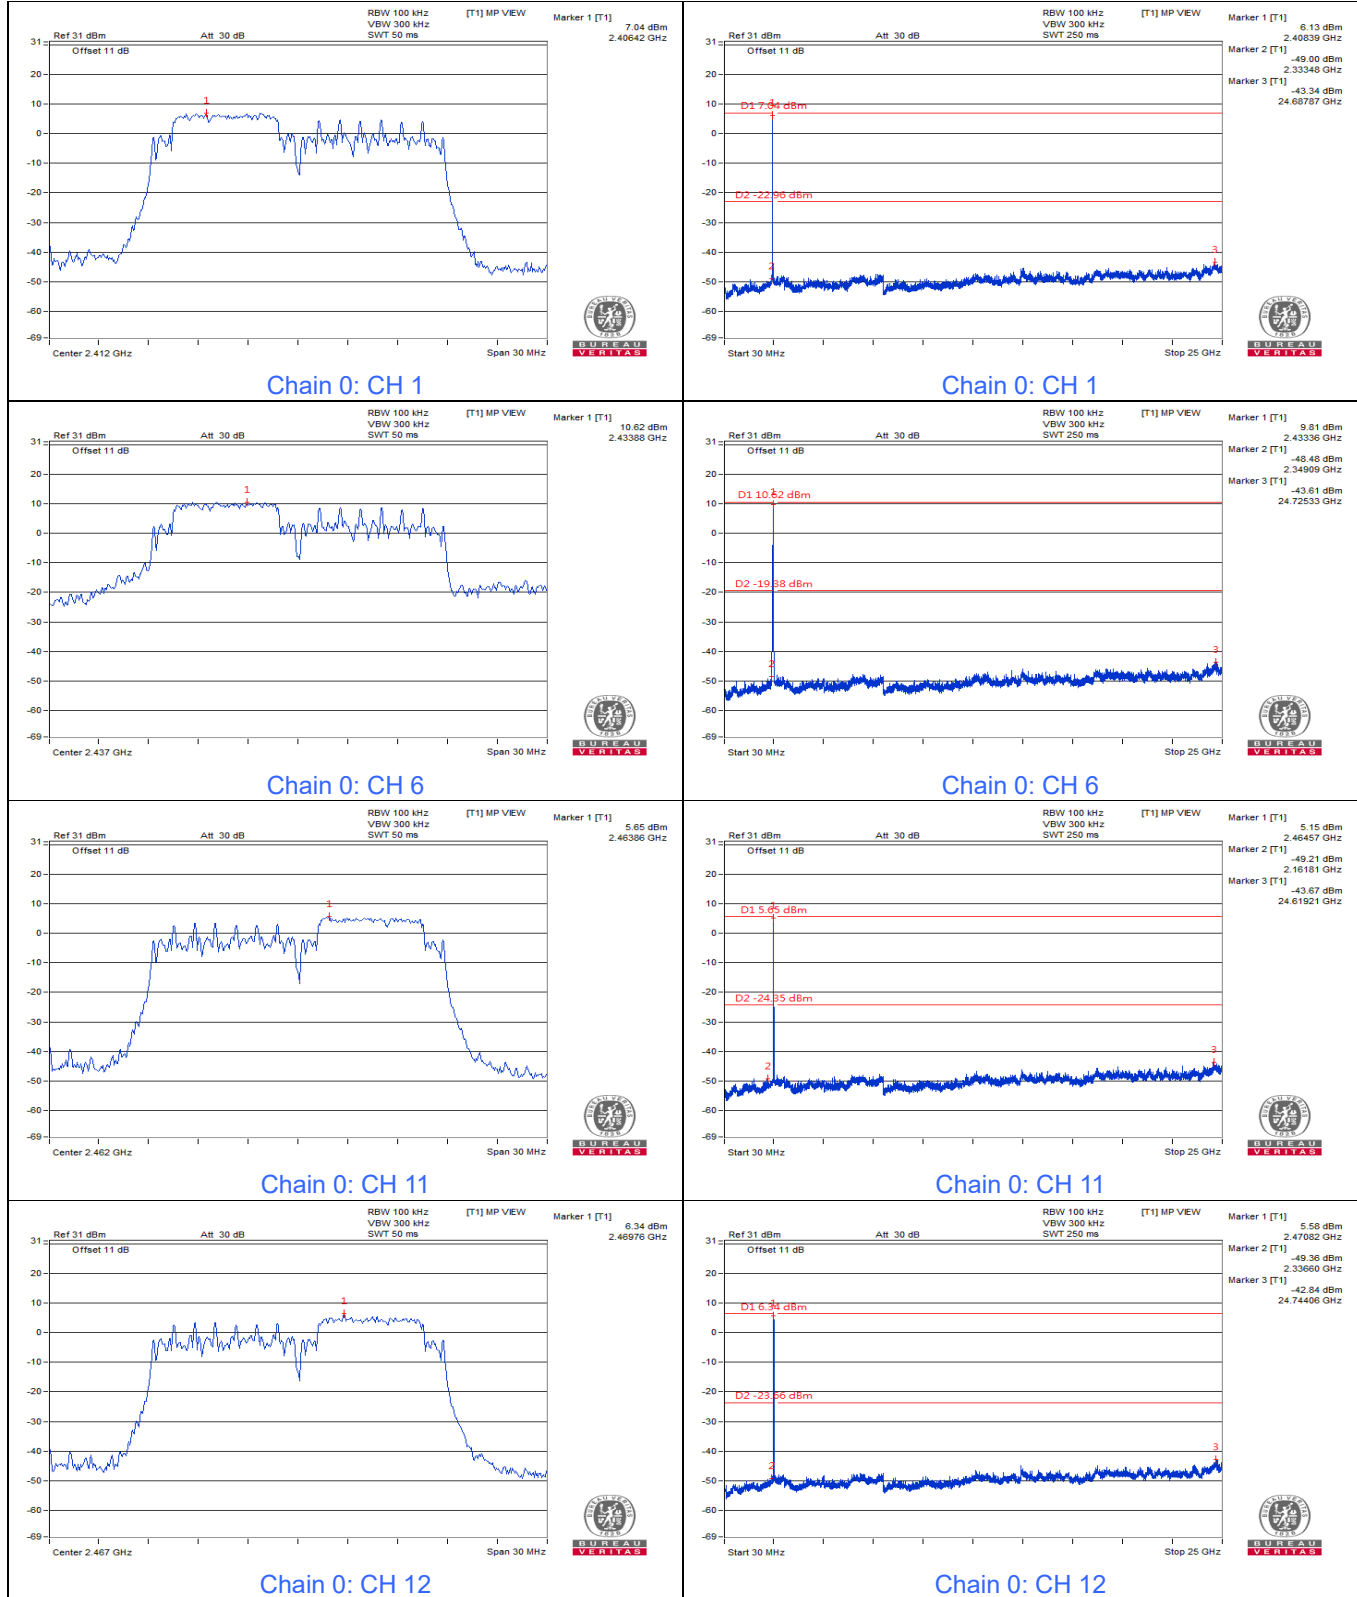

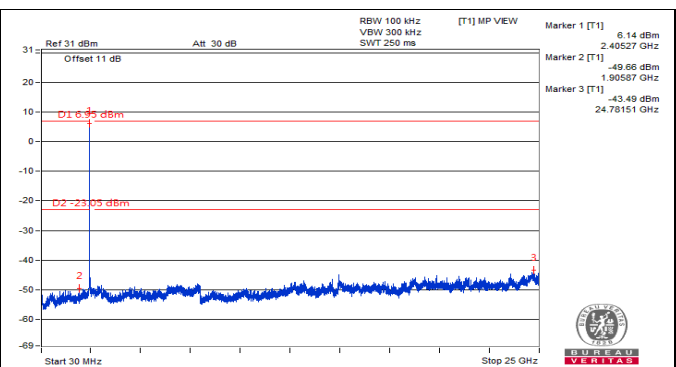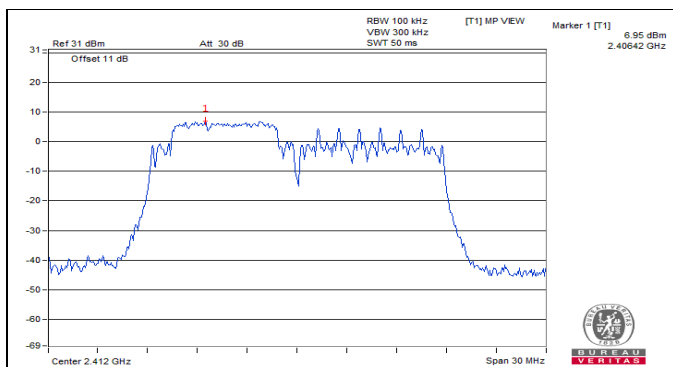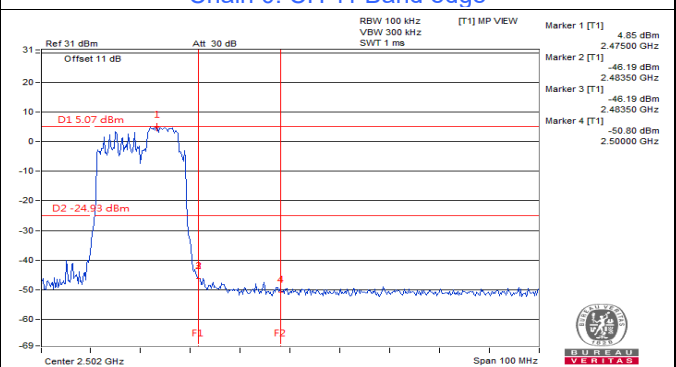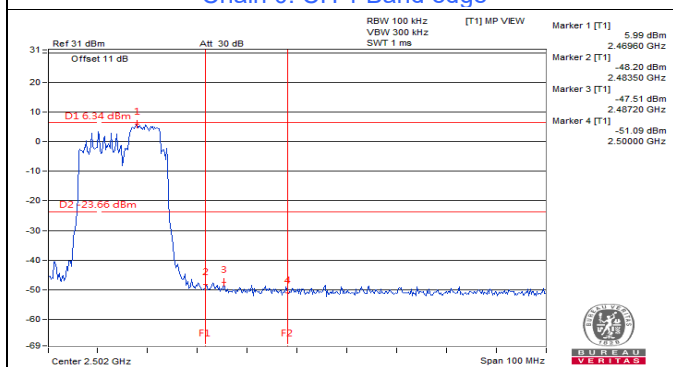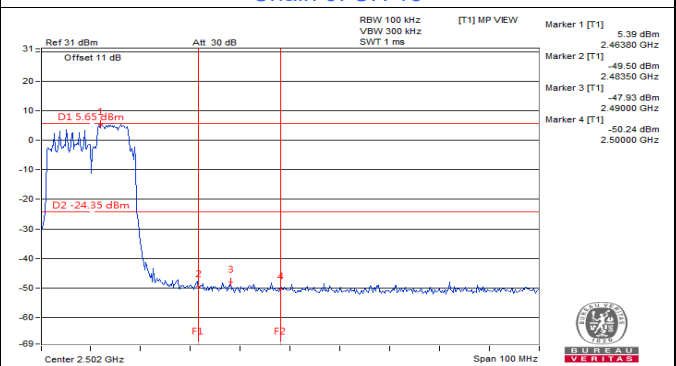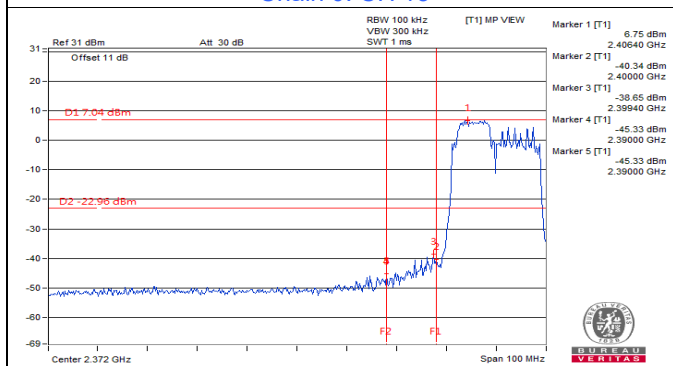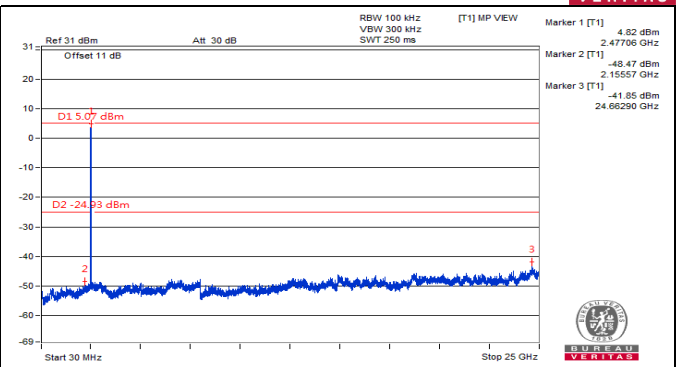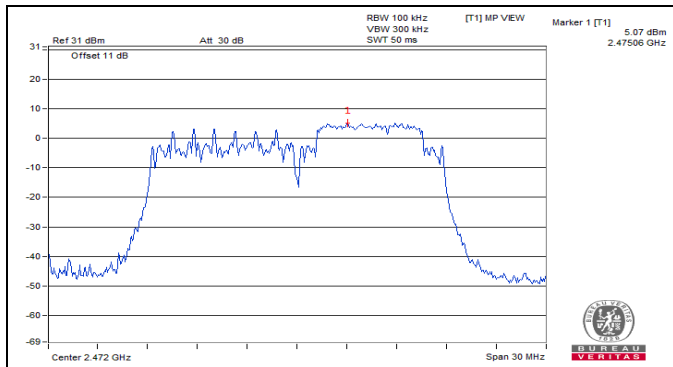





BUREAU
VERITAS

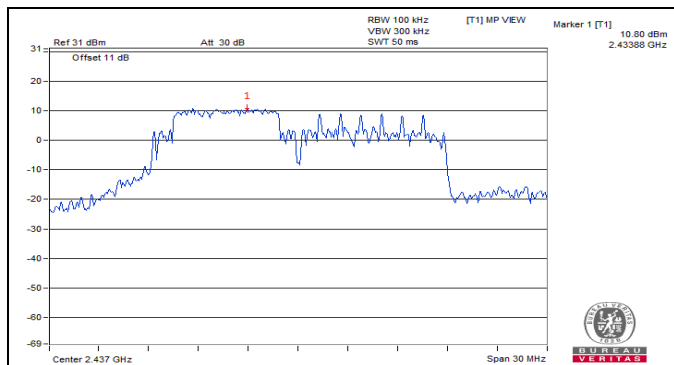


Chain 1: CH 6

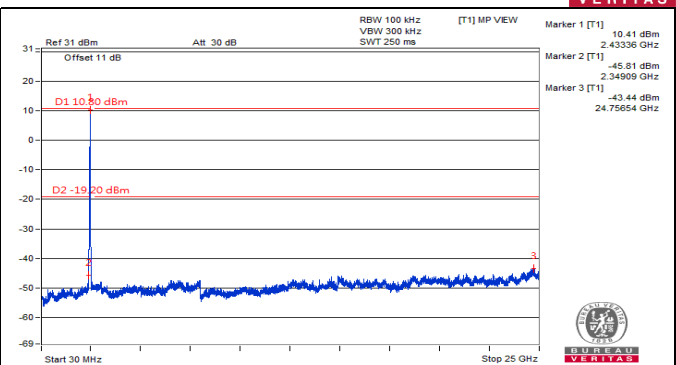


Chain 1: CH 6

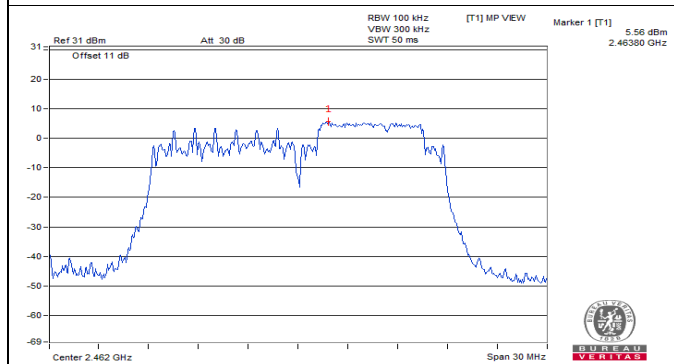


Chain 1: CH 11

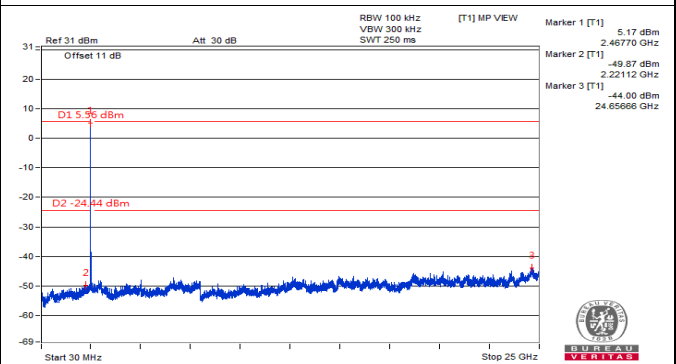


Chain 1: CH 11

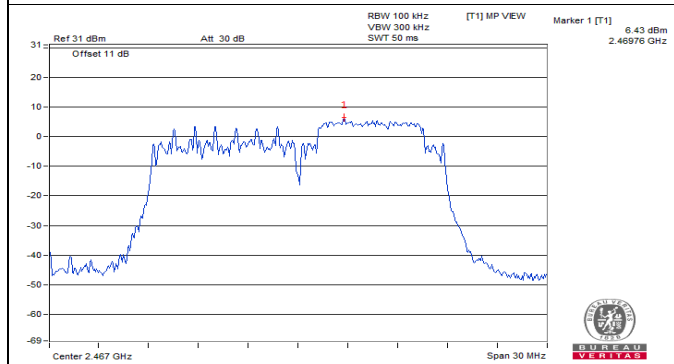


Chain 1: CH 12

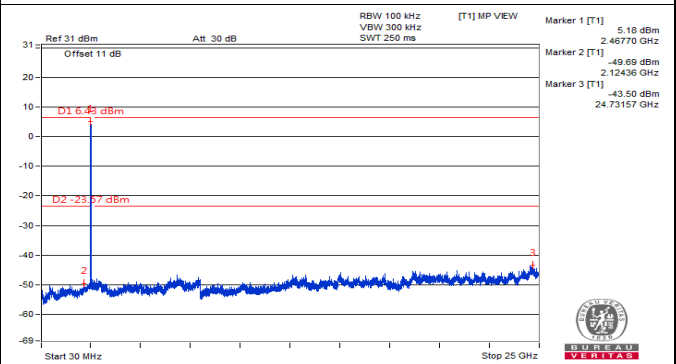





Chain 1: CH 12

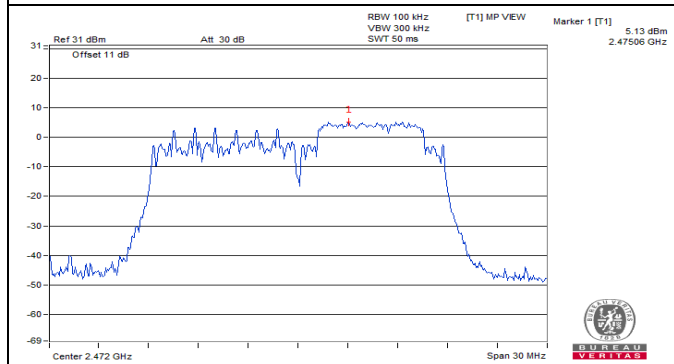


Chain 1: CH 13








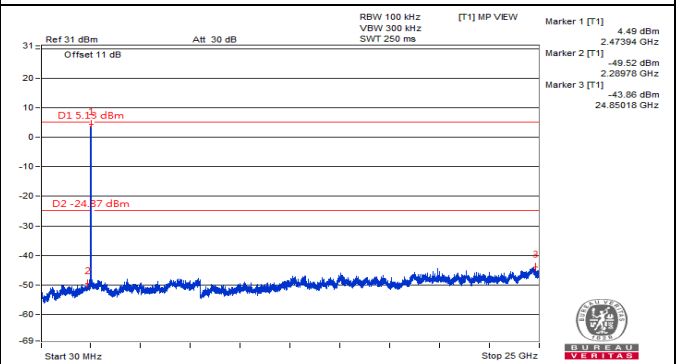


Chain 1: CH 13

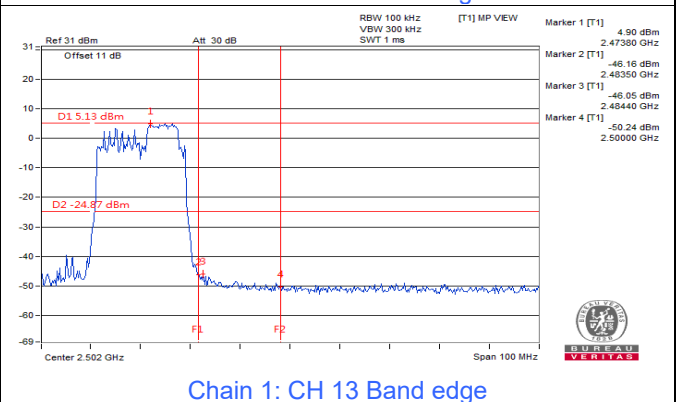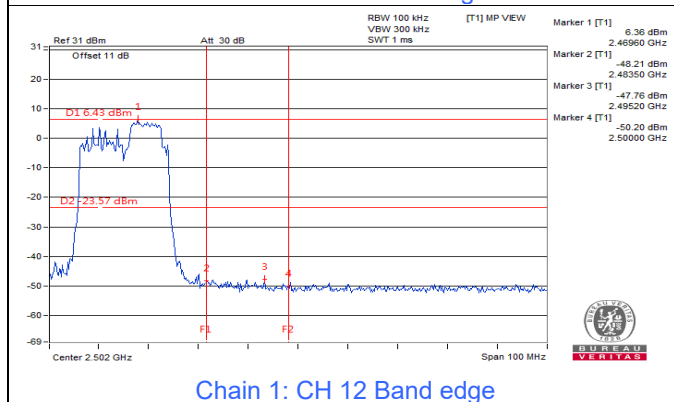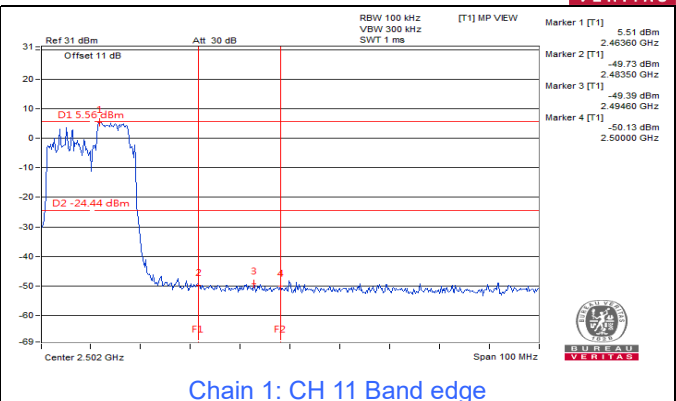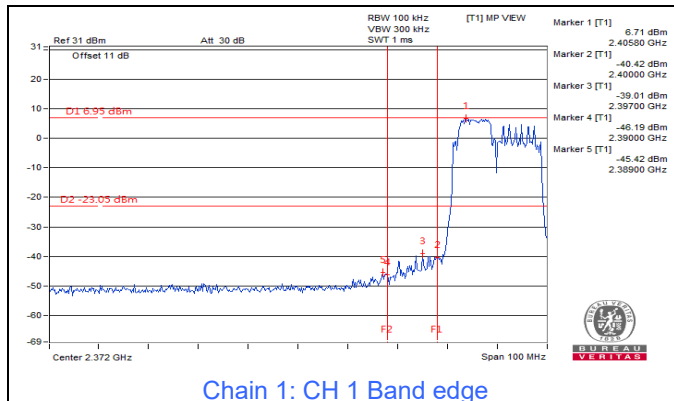


802.11be (EHT20) 106+26-tone MRU




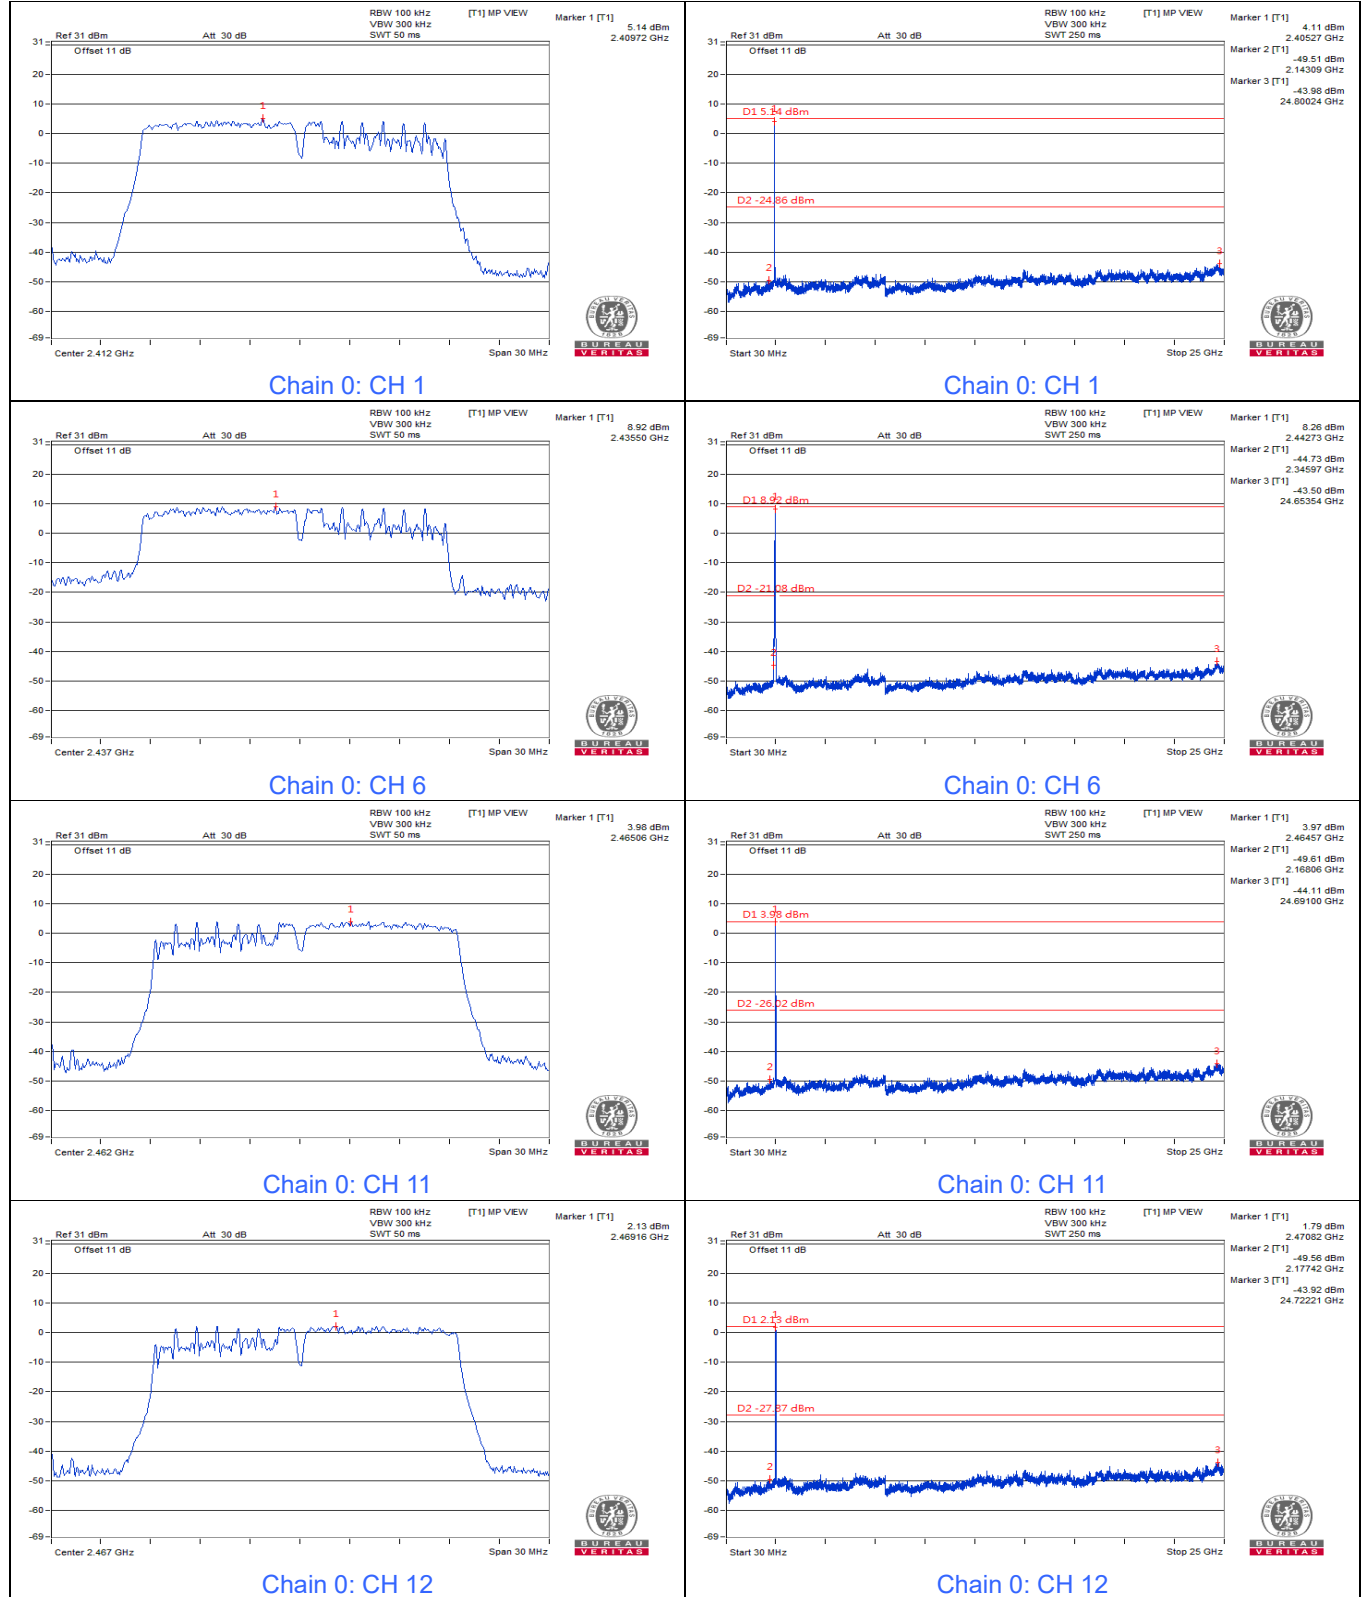


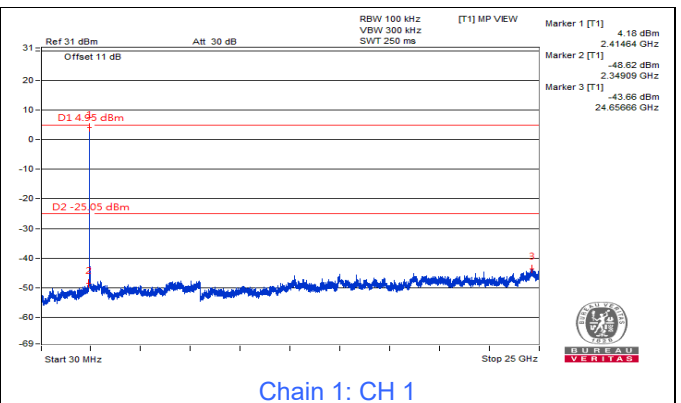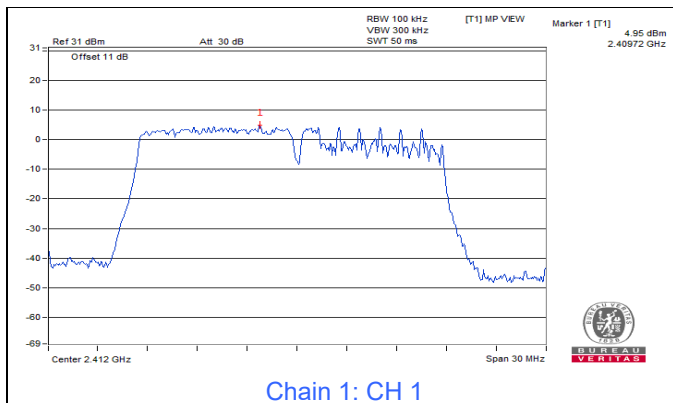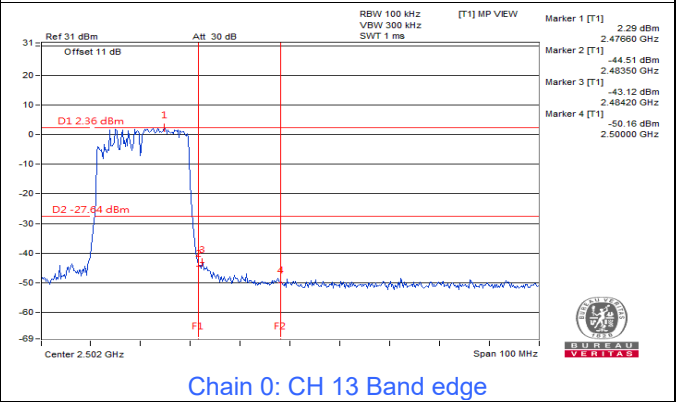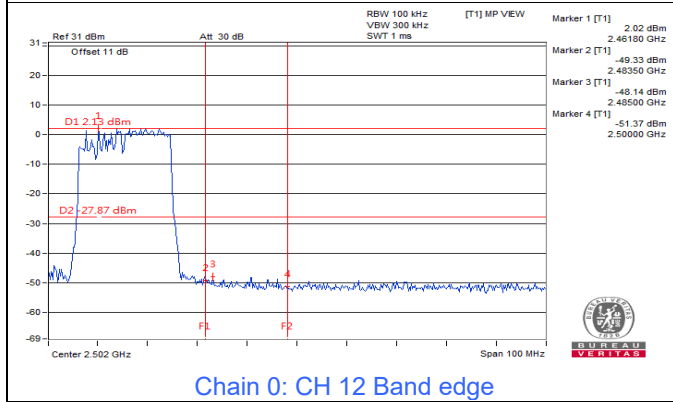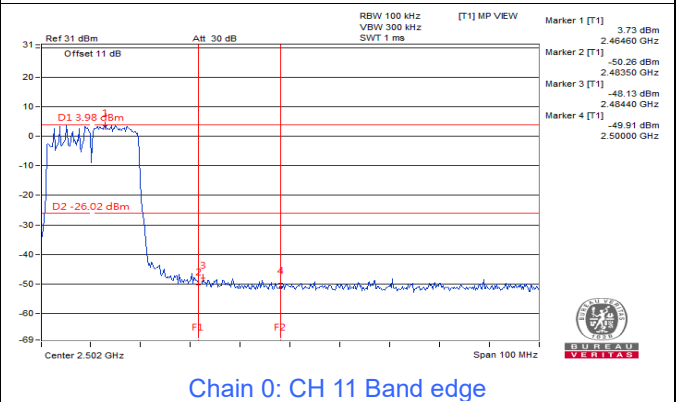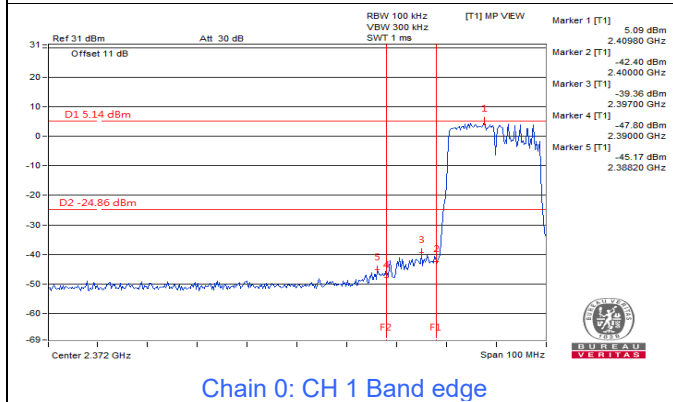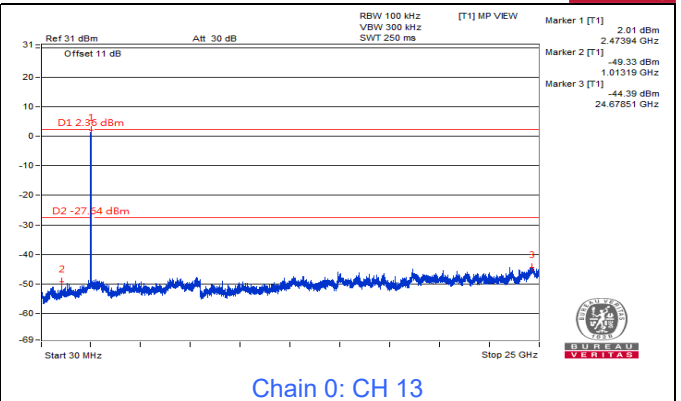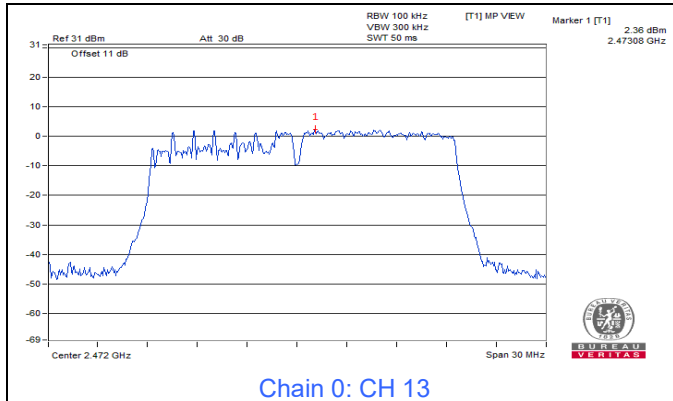



BUREAU
VERITAS

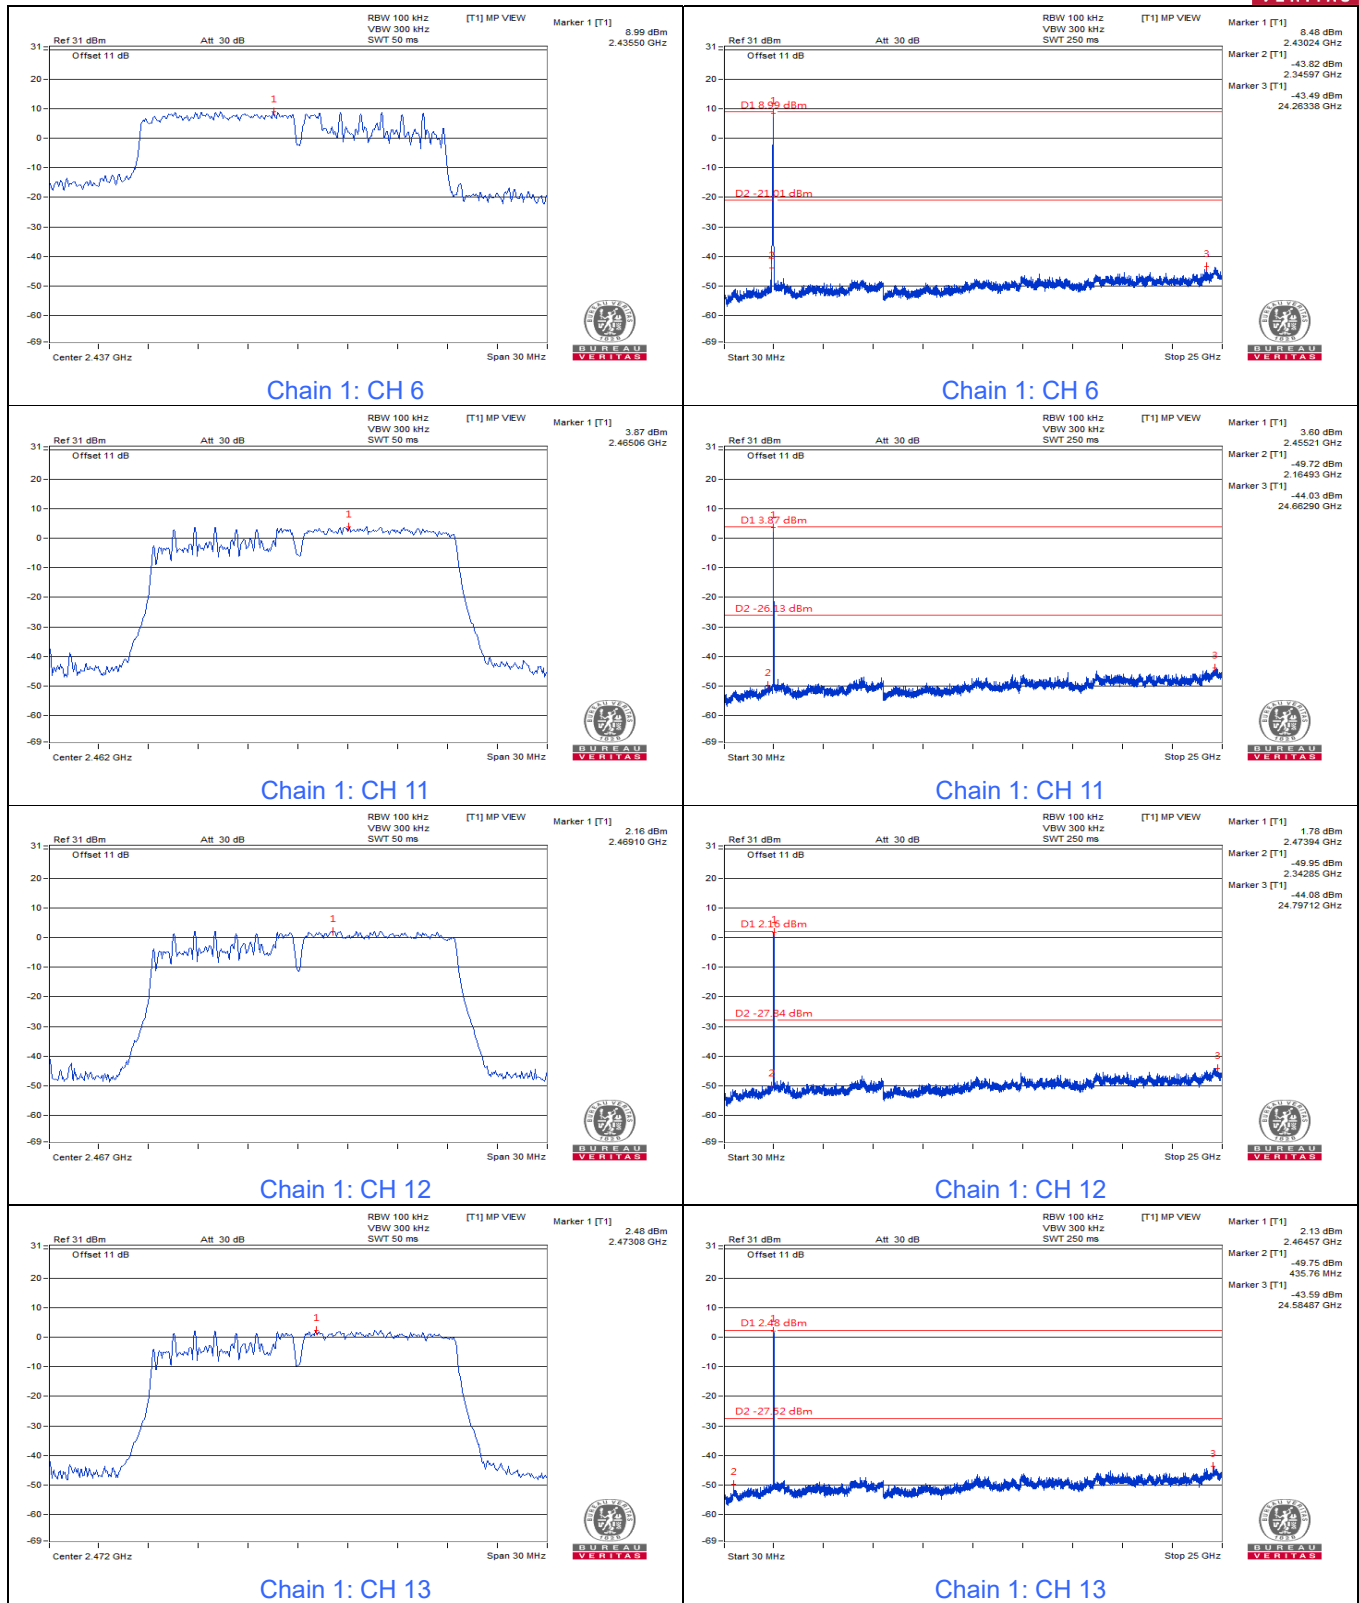

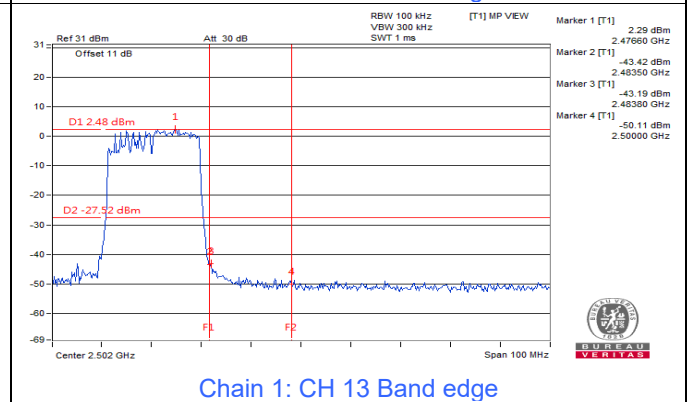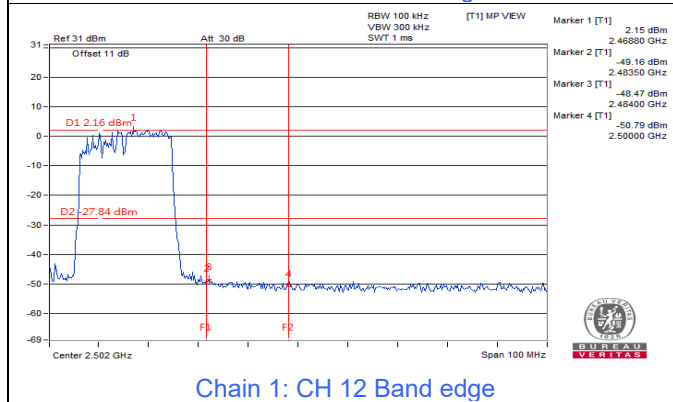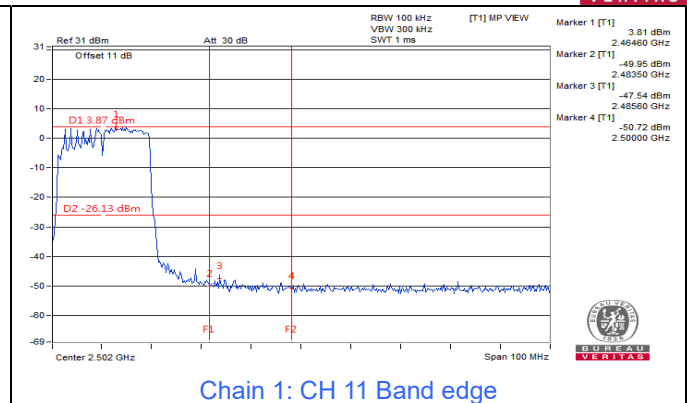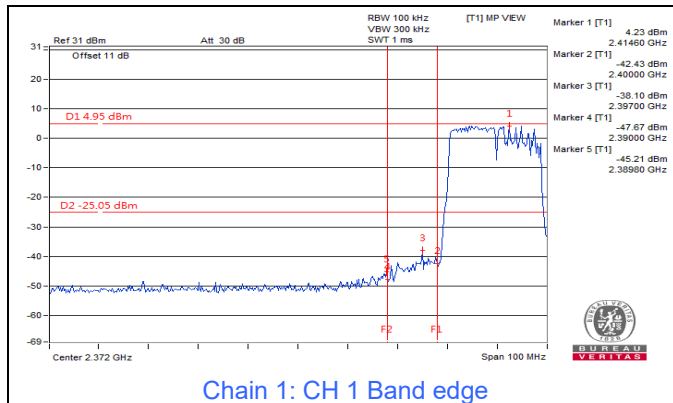

7.5 AC Power Conducted Emissions


2TX (Test Mode A - PIFA Antenna)

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Edison Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.78	42.48	29.27	52.26	39.05	66.00	56.00	-13.74	-16.95
2	0.16063	9.78	43.60	23.84	53.38	33.62	65.43	55.43	-12.05	-21.81
3	0.49400	9.78	35.06	22.49	44.84	32.27	56.10	46.10	-11.26	-13.83
4	0.74432	9.80	38.62	20.28	48.42	30.08	56.00	46.00	-7.58	-15.92
5	0.83800	9.80	34.65	19.84	44.45	29.64	56.00	46.00	-11.55	-16.36
6	7.92600	9.95	21.07	14.25	31.02	24.20	60.00	50.00	-28.98	-25.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

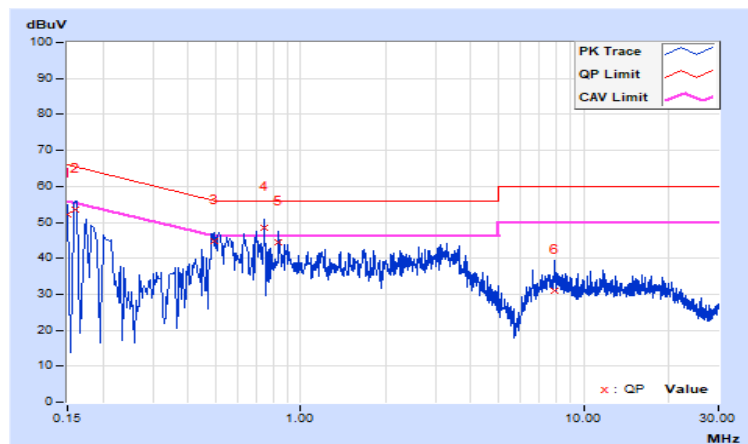


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Edison Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16190	9.78	44.01	23.41	53.79	33.19	65.37	55.37	-11.58	-22.18
2	0.55400	9.79	33.95	20.95	43.74	30.74	56.00	46.00	-12.26	-15.26
3	0.69000	9.79	35.20	17.51	44.99	27.30	56.00	46.00	-11.01	-18.70
4	0.77400	9.79	37.11	20.06	46.90	29.85	56.00	46.00	-9.10	-16.15
5	0.87000	9.79	32.42	17.62	42.21	27.41	56.00	46.00	-13.79	-18.59
6	7.76200	9.98	19.63	13.24	29.61	23.22	60.00	50.00	-30.39	-26.78

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

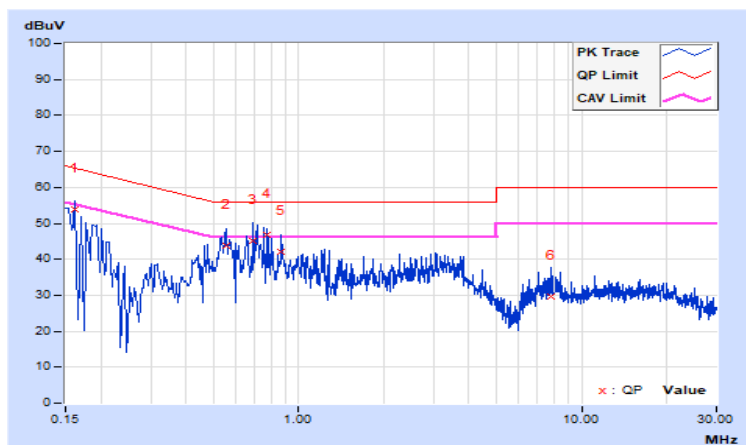


2TX (Test Mode B - Monopole Antenna)

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Edison Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.78	40.31	28.49	50.09	38.27	66.00	56.00	-15.91	-17.73
2	0.55800	9.79	34.32	25.93	44.11	35.72	56.00	46.00	-11.89	-10.28
3	0.71000	9.80	33.40	17.17	43.20	26.97	56.00	46.00	-12.80	-19.03
4	0.75800	9.80	34.30	20.31	44.10	30.11	56.00	46.00	-11.90	-15.89
5	2.71000	9.89	22.75	16.38	32.64	26.27	56.00	46.00	-23.36	-19.73
6	11.75400	9.99	17.32	10.12	27.31	20.11	60.00	50.00	-32.69	-29.89

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

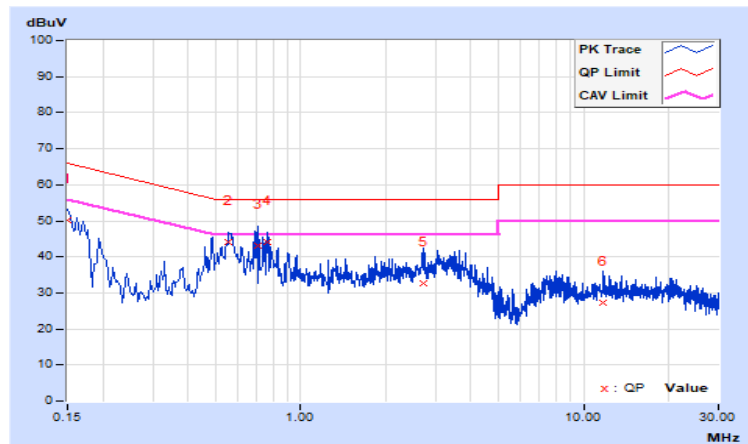


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Edison Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.79	43.17	29.96	52.96	39.75	66.00	56.00	-13.04	-16.25
2	0.19400	9.76	32.66	19.10	42.42	28.86	63.86	53.86	-21.44	-25.00
3	0.55705	9.79	34.52	26.64	44.31	36.43	56.00	46.00	-11.69	-9.57
4	0.75400	9.79	33.81	20.07	43.60	29.86	56.00	46.00	-12.40	-16.14
5	3.30200	9.91	27.04	20.16	36.95	30.07	56.00	46.00	-19.05	-15.93
6	10.89000	10.03	17.12	10.77	27.15	20.80	60.00	50.00	-32.85	-29.20

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

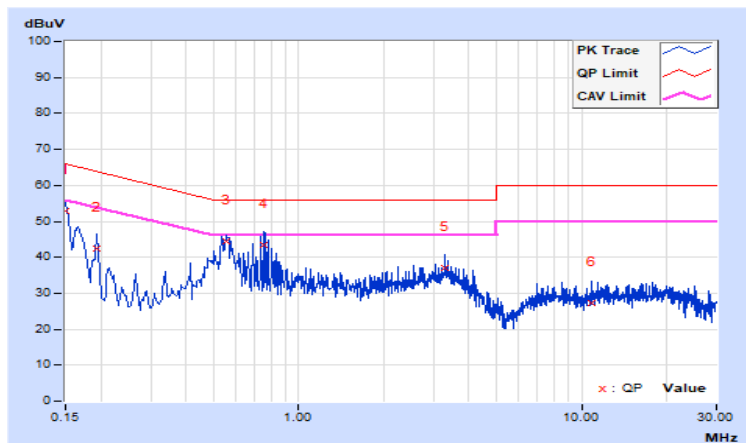

7.6 Unwanted Emissions below 1 GHz


2TX (Test Mode A - PIFA Antenna)

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.84	33.6 QP	43.5	-9.9	1.50 H	225	51.1	-17.5
2	143.49	35.0 QP	43.5	-8.5	1.00 H	38	48.2	-13.2
3	299.66	44.5 QP	46.0	-1.5	1.00 H	272	56.7	-12.2
4	436.43	31.9 QP	46.0	-14.1	2.00 H	23	40.6	-8.7
5	664.38	31.1 QP	46.0	-14.9	1.00 H	154	35.4	-4.3
6	896.21	41.1 QP	46.0	-4.9	1.00 H	349	41.9	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

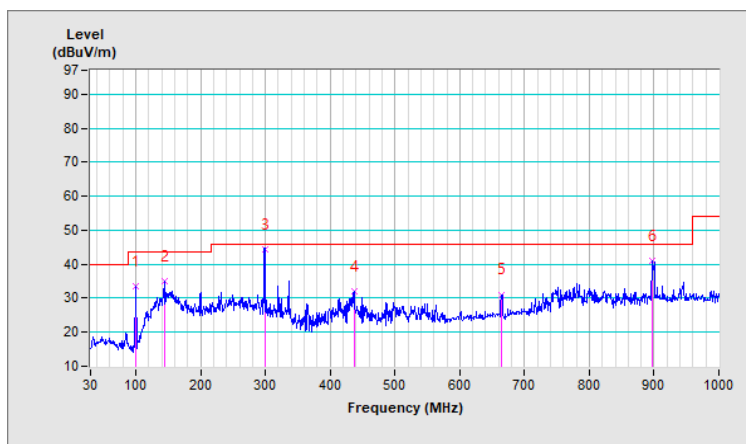


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	32.3 QP	40.0	-7.7	1.50 V	142	46.3	-14.0
2	143.49	28.7 QP	43.5	-14.8	1.00 V	58	41.9	-13.2
3	299.66	34.0 QP	46.0	-12.0	2.00 V	18	46.2	-12.2
4	666.32	35.1 QP	46.0	-10.9	1.00 V	105	39.4	-4.3
5	777.87	34.5 QP	46.0	-11.5	2.00 V	261	36.6	-2.1
6	900.09	36.1 QP	46.0	-9.9	1.00 V	84	36.8	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

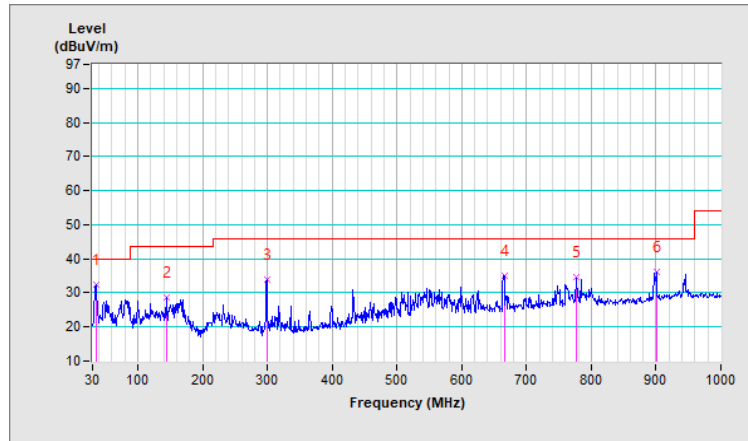


2TX (Test Mode B - Monopole Antenna)

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.84	39.3 QP	43.5	-4.2	1.99 H	48	56.8	-17.5
2	143.49	38.8 QP	43.5	-4.7	1.99 H	43	52.0	-13.2
3	298.69	42.9 QP	46.0	-3.1	1.00 H	67	55.1	-12.2
4	537.31	37.1 QP	46.0	-8.9	1.99 H	17	44.0	-6.9
5	666.32	35.8 QP	46.0	-10.2	1.49 H	70	40.1	-4.3
6	900.09	41.1 QP	46.0	-4.9	1.00 H	302	41.8	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

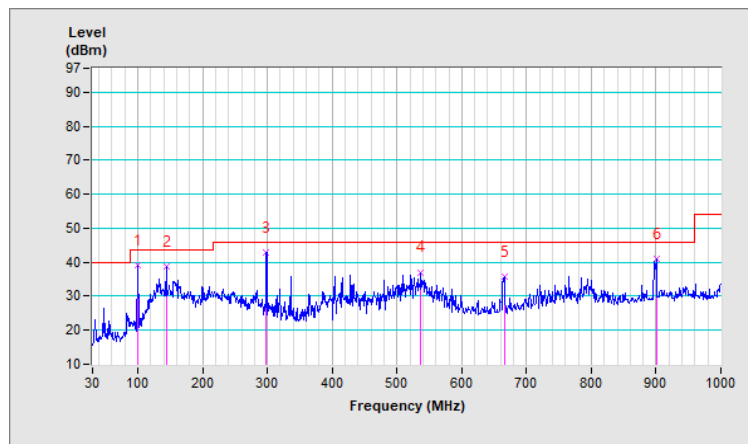


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.91	37.7 QP	40.0	-2.3	1.00 V	188	51.9	-14.2
2	47.46	35.8 QP	40.0	-4.2	1.00 V	284	48.8	-13.0
3	298.69	37.5 QP	46.0	-8.5	1.49 V	326	49.7	-12.2
4	535.37	35.1 QP	46.0	-10.9	1.49 V	123	42.0	-6.9
5	792.42	41.4 QP	46.0	-4.6	1.00 V	309	43.6	-2.2
6	900.09	39.5 QP	46.0	-6.5	1.49 V	91	40.2	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

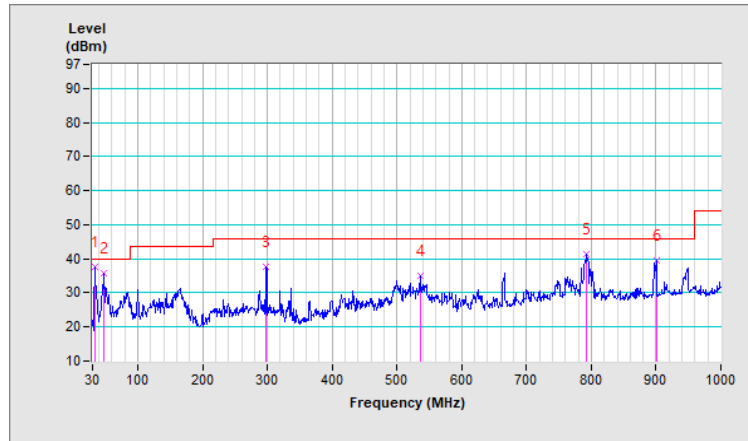

7.7 Unwanted Emissions above 1 GHz

1TX (Test Mode A - PIFA Antenna)

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.20 H	52	32.0	32.9
2	2390.00	52.4 AV	54.0	-1.6	1.20 H	52	19.5	32.9
3	*2412.00	111.9 PK			1.20 H	52	79.0	32.9
4	*2412.00	109.3 AV			1.20 H	52	76.4	32.9
5	4824.00	50.9 PK	74.0	-23.1	1.23 H	50	45.5	5.4
6	4824.00	39.9 AV	54.0	-14.1	1.23 H	50	34.5	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.9 PK	74.0	-12.1	1.15 V	343	29.0	32.9
2	2390.00	50.1 AV	54.0	-3.9	1.15 V	343	17.2	32.9
3	*2412.00	109.9 PK			1.15 V	343	77.0	32.9
4	*2412.00	107.4 AV			1.15 V	343	74.5	32.9
5	4824.00	51.3 PK	74.0	-22.7	1.69 V	350	45.9	5.4
6	4824.00	41.4 AV	54.0	-12.6	1.69 V	350	36.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.7 PK			1.19 H	50	78.8	32.9
2	*2437.00	109.6 AV			1.19 H	50	76.7	32.9
3	4874.00	51.3 PK	74.0	-22.7	1.12 H	60	46.0	5.3
4	4874.00	40.4 AV	54.0	-13.6	1.12 H	60	35.1	5.3
5	7311.00	58.7 PK	74.0	-15.3	4.00 H	59	47.9	10.8
6	7311.00	49.3 AV	54.0	-4.7	4.00 H	59	38.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.5 PK			1.17 V	340	77.6	32.9
2	*2437.00	107.9 AV			1.17 V	340	75.0	32.9
3	4874.00	52.2 PK	74.0	-21.8	1.66 V	342	46.9	5.3
4	4874.00	41.5 AV	54.0	-12.5	1.66 V	342	36.2	5.3
5	7311.00	59.3 PK	74.0	-14.7	1.38 V	24	48.5	10.8
6	7311.00	49.8 AV	54.0	-4.2	1.38 V	24	39.0	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.9 PK			3.99 H	15	78.0	32.9
2	*2462.00	108.9 AV			3.99 H	15	76.0	32.9
3	2483.50	62.4 PK	74.0	-11.6	3.99 H	18	29.5	32.9
4	2483.50	52.3 AV	54.0	-1.7	3.99 H	18	19.4	32.9
5	4924.00	51.4 PK	74.0	-22.6	1.11 H	57	46.1	5.3
6	4924.00	40.4 AV	54.0	-13.6	1.11 H	57	35.1	5.3
7	7386.00	58.9 PK	74.0	-15.1	4.00 H	45	47.9	11.0
8	7386.00	49.3 AV	54.0	-4.7	4.00 H	45	38.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.2 PK			1.24 V	338	77.3	32.9
2	*2462.00	108.1 AV			1.24 V	338	75.2	32.9
3	2483.50	62.5 PK	74.0	-11.5	1.24 V	338	29.6	32.9
4	2483.50	50.9 AV	54.0	-3.1	1.24 V	338	18.0	32.9
5	4924.00	52.1 PK	74.0	-21.9	1.63 V	340	46.8	5.3
6	4924.00	41.6 AV	54.0	-12.4	1.63 V	340	36.3	5.3
7	7386.00	60.2 PK	74.0	-13.8	1.39 V	33	49.2	11.0
8	7386.00	50.5 AV	54.0	-3.5	1.39 V	33	39.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.0 PK			4.00 H	11	76.0	33.0
2	*2467.00	106.5 AV			4.00 H	11	73.5	33.0
3	2483.50	61.4 PK	74.0	-12.6	4.00 H	11	28.5	32.9
4	2483.50	49.7 AV	54.0	-4.3	4.00 H	11	16.8	32.9
5	4924.00	51.2 PK	74.0	-22.8	1.20 H	62	45.9	5.3
6	4924.00	40.4 AV	54.0	-13.6	1.20 H	62	35.1	5.3
7	7401.00	58.2 PK	74.0	-15.8	4.00 H	39	47.2	11.0
8	7401.00	49.0 AV	54.0	-5.0	4.00 H	39	38.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.5 PK			1.13 V	338	75.5	33.0
2	*2467.00	106.0 AV			1.13 V	338	73.0	33.0
3	2483.50	60.9 PK	74.0	-13.1	1.13 V	338	28.0	32.9
4	2483.50	48.9 AV	54.0	-5.1	1.13 V	338	16.0	32.9
5	4934.00	52.3 PK	74.0	-21.7	1.66 V	352	47.0	5.3
6	4934.00	41.6 AV	54.0	-12.4	1.66 V	352	36.3	5.3
7	7401.00	58.7 PK	74.0	-15.3	1.47 V	38	47.7	11.0
8	7401.00	49.2 AV	54.0	-4.8	1.47 V	38	38.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.4 PK			3.96 H	12	71.4	33.0
2	*2472.00	101.8 AV			3.96 H	12	68.8	33.0
3	2483.50	60.5 PK	74.0	-13.5	3.96 H	12	27.6	32.9
4	2483.50	49.4 AV	54.0	-4.6	3.96 H	12	16.5	32.9
5	4944.00	51.0 PK	74.0	-23.0	1.27 H	68	45.6	5.4
6	4944.00	40.2 AV	54.0	-13.8	1.27 H	68	34.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.6 PK			1.20 V	338	70.6	33.0
2	*2472.00	101.2 AV			1.20 V	338	68.2	33.0
3	2483.50	60.4 PK	74.0	-13.6	1.20 V	338	27.5	32.9
4	2483.50	49.1 AV	54.0	-4.9	1.20 V	338	16.2	32.9
5	4944.00	52.3 PK	74.0	-21.7	1.69 V	357	46.9	5.4
6	4944.00	41.5 AV	54.0	-12.5	1.69 V	357	36.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	1.19 H	53	32.2	32.9
2	2390.00	52.2 AV	54.0	-1.8	1.19 H	53	19.3	32.9
3	*2412.00	112.7 PK			1.19 H	53	79.8	32.9
4	*2412.00	102.4 AV			1.19 H	53	69.5	32.9
5	4824.00	50.9 PK	74.0	-23.1	1.14 H	52	45.5	5.4
6	4824.00	39.8 AV	54.0	-14.2	1.14 H	52	34.4	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.17 V	343	30.8	32.9
2	2390.00	50.4 AV	54.0	-3.6	1.17 V	343	17.5	32.9
3	*2412.00	110.1 PK			1.17 V	343	77.2	32.9
4	*2412.00	100.2 AV			1.17 V	343	67.3	32.9
5	4824.00	51.7 PK	74.0	-22.3	1.50 V	357	46.3	5.4
6	4824.00	40.9 AV	54.0	-13.1	1.50 V	357	35.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	1.14 H	50	30.9	32.9
2	2390.00	49.7 AV	54.0	-4.3	1.14 H	50	16.8	32.9
3	*2417.00	112.2 PK			1.14 H	50	79.3	32.9
4	*2417.00	102.2 AV			1.14 H	50	69.3	32.9
5	4834.00	51.0 PK	74.0	-23.0	1.17 H	50	45.6	5.4
6	4834.00	39.8 AV	54.0	-14.2	1.17 H	50	34.4	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.21 V	333	27.5	32.9
2	2390.00	47.6 AV	54.0	-6.4	1.21 V	333	14.7	32.9
3	*2417.00	108.9 PK			1.21 V	333	76.0	32.9
4	*2417.00	99.4 AV			1.21 V	333	66.5	32.9
5	4834.00	51.5 PK	74.0	-22.5	1.49 V	357	46.1	5.4
6	4834.00	40.9 AV	54.0	-13.1	1.49 V	357	35.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.7 PK			1.16 H	49	80.8	32.9
2	*2437.00	104.7 AV			1.16 H	49	71.8	32.9
3	4874.00	51.5 PK	74.0	-22.5	1.19 H	61	46.2	5.3
4	4874.00	40.8 AV	54.0	-13.2	1.19 H	61	35.5	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.2 PK			1.15 V	343	79.3	32.9
2	*2437.00	103.1 AV			1.15 V	343	70.2	32.9
3	4874.00	52.0 PK	74.0	-22.0	1.56 V	348	46.7	5.3
4	4874.00	41.1 AV	54.0	-12.9	1.56 V	348	35.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.1 PK			1.24 H	41	78.2	32.9
2	*2462.00	101.4 AV			1.24 H	41	68.5	32.9
3	2483.50	68.0 PK	74.0	-6.0	1.24 H	41	35.1	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.24 H	41	19.5	32.9
5	4924.00	50.9 PK	74.0	-23.1	1.13 H	54	45.6	5.3
6	4924.00	39.6 AV	54.0	-14.4	1.13 H	54	34.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.3 PK			1.01 V	343	77.4	32.9
2	*2462.00	100.7 AV			1.01 V	343	67.8	32.9
3	2483.50	67.1 PK	74.0	-6.9	1.01 V	343	34.2	32.9
4	2483.50	51.6 AV	54.0	-2.4	1.01 V	343	18.7	32.9
5	4924.00	51.9 PK	74.0	-22.1	1.53 V	354	46.6	5.3
6	4924.00	40.7 AV	54.0	-13.3	1.53 V	354	35.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.9 PK			1.24 H	32	77.9	33.0
2	*2467.00	101.2 AV			1.24 H	32	68.2	33.0
3	2483.50	67.4 PK	74.0	-6.6	1.24 H	32	34.5	32.9
4	2483.50	52.3 AV	54.0	-1.7	1.24 H	32	19.4	32.9
5	4934.00	50.9 PK	74.0	-23.1	1.15 H	58	45.6	5.3
6	4934.00	39.6 AV	54.0	-14.4	1.15 H	58	34.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.2 PK			1.02 V	344	77.2	33.0
2	*2467.00	100.6 AV			1.02 V	344	67.6	33.0
3	2483.50	66.5 PK	74.0	-7.5	1.02 V	344	33.6	32.9
4	2483.50	51.5 AV	54.0	-2.5	1.02 V	344	18.6	32.9
5	4934.00	51.6 PK	74.0	-22.4	1.63 V	357	46.3	5.3
6	4934.00	40.6 AV	54.0	-13.4	1.63 V	357	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.8 PK			1.22 H	42	74.8	33.0
2	*2472.00	98.2 AV			1.22 H	42	65.2	33.0
3	2483.50	63.4 PK	74.0	-10.6	1.22 H	42	30.5	32.9
4	2483.50	50.2 AV	54.0	-3.8	1.22 H	42	17.3	32.9
5	4944.00	50.9 PK	74.0	-23.1	1.13 H	59	45.5	5.4
6	4944.00	39.7 AV	54.0	-14.3	1.13 H	59	34.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.1 PK			1.06 V	348	74.1	33.0
2	*2472.00	97.4 AV			1.06 V	348	64.4	33.0
3	2483.50	62.6 PK	74.0	-11.4	1.06 V	348	29.7	32.9
4	2483.50	49.3 AV	54.0	-4.7	1.06 V	348	16.4	32.9
5	4944.00	51.7 PK	74.0	-22.3	1.57 V	349	46.3	5.4
6	4944.00	40.6 AV	54.0	-13.4	1.57 V	349	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	1.20 H	59	34.1	32.9
2	2390.00	52.5 AV	54.0	-1.5	1.20 H	59	19.6	32.9
3	*2412.00	113.8 PK			1.20 H	59	80.9	32.9
4	*2412.00	101.6 AV			1.20 H	59	68.7	32.9
5	4824.00	51.1 PK	74.0	-22.9	1.16 H	58	45.7	5.4
6	4824.00	39.9 AV	54.0	-14.1	1.16 H	58	34.5	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	1.04 V	344	32.7	32.9
2	2390.00	51.1 AV	54.0	-2.9	1.04 V	344	18.2	32.9
3	*2412.00	111.7 PK			1.04 V	344	78.8	32.9
4	*2412.00	99.6 AV			1.04 V	344	66.7	32.9
5	4824.00	52.1 PK	74.0	-21.9	1.63 V	356	46.7	5.4
6	4824.00	40.9 AV	54.0	-13.1	1.63 V	356	35.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.5 PK			1.06 H	61	84.6	32.9
2	*2437.00	105.0 AV			1.06 H	61	72.1	32.9
3	4874.00	51.1 PK	74.0	-22.9	1.14 H	53	45.8	5.3
4	4874.00	39.9 AV	54.0	-14.1	1.14 H	53	34.6	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.3 PK			1.03 V	341	82.4	32.9
2	*2437.00	103.1 AV			1.03 V	341	70.2	32.9
3	4874.00	52.1 PK	74.0	-21.9	1.64 V	358	46.8	5.3
4	4874.00	41.0 AV	54.0	-13.0	1.64 V	358	35.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.5 PK			1.08 H	58	79.6	32.9
2	*2462.00	100.4 AV			1.08 H	58	67.5	32.9
3	2483.50	65.5 PK	74.0	-8.5	1.08 H	58	32.6	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.08 H	58	17.8	32.9
5	4924.00	50.7 PK	74.0	-23.3	1.19 H	63	45.4	5.3
6	4924.00	39.6 AV	54.0	-14.4	1.19 H	63	34.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.5 PK			1.01 V	347	78.6	32.9
2	*2462.00	99.2 AV			1.01 V	347	66.3	32.9
3	2483.50	64.3 PK	74.0	-9.7	1.01 V	347	31.4	32.9
4	2483.50	50.0 AV	54.0	-4.0	1.01 V	347	17.1	32.9
5	4924.00	51.9 PK	74.0	-22.1	1.64 V	347	46.6	5.3
6	4924.00	40.6 AV	54.0	-13.4	1.64 V	347	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.2 PK			1.11 H	65	79.2	33.0
2	*2467.00	100.1 AV			1.11 H	65	67.1	33.0
3	2483.50	65.6 PK	74.0	-8.4	1.11 H	65	32.7	32.9
4	2483.50	49.3 AV	54.0	-4.7	1.11 H	65	16.4	32.9
5	4934.00	50.6 PK	74.0	-23.4	1.16 H	63	45.3	5.3
6	4934.00	39.6 AV	54.0	-14.4	1.16 H	63	34.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.3 PK			1.03 V	341	78.3	33.0
2	*2467.00	99.2 AV			1.03 V	341	66.2	33.0
3	2483.50	64.7 PK	74.0	-9.3	1.03 V	341	31.8	32.9
4	2483.50	48.8 AV	54.0	-5.2	1.03 V	341	15.9	32.9
5	4934.00	51.7 PK	74.0	-22.3	1.55 V	353	46.4	5.3
6	4934.00	40.6 AV	54.0	-13.4	1.55 V	353	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.7 PK			1.10 H	62	77.7	33.0
2	*2472.00	98.4 AV			1.10 H	62	65.4	33.0
3	2483.50	64.5 PK	74.0	-9.5	1.10 H	62	31.6	32.9
4	2483.50	50.5 AV	54.0	-3.5	1.10 H	62	17.6	32.9
5	4944.00	50.7 PK	74.0	-23.3	1.24 H	65	45.3	5.4
6	4944.00	39.7 AV	54.0	-14.3	1.24 H	65	34.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.8 PK			1.07 V	348	76.8	33.0
2	*2472.00	97.6 AV			1.07 V	348	64.6	33.0
3	2483.50	63.6 PK	74.0	-10.4	1.07 V	348	30.7	32.9
4	2483.50	49.8 AV	54.0	-4.2	1.07 V	348	16.9	32.9
5	4944.00	51.7 PK	74.0	-22.3	1.72 V	358	46.3	5.4
6	4944.00	40.7 AV	54.0	-13.3	1.72 V	358	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.12 H	60	32.4	32.9
2	2390.00	51.3 AV	54.0	-2.7	1.12 H	60	18.4	32.9
3	*2422.00	109.8 PK			1.12 H	60	76.9	32.9
4	*2422.00	97.5 AV			1.12 H	60	64.6	32.9
5	4844.00	50.9 PK	74.0	-23.1	1.12 H	57	45.5	5.4
6	4844.00	39.8 AV	54.0	-14.2	1.12 H	57	34.4	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	1.03 V	340	31.3	32.9
2	2390.00	50.1 AV	54.0	-3.9	1.03 V	340	17.2	32.9
3	*2422.00	107.6 PK			1.03 V	340	74.7	32.9
4	*2422.00	95.4 AV			1.03 V	340	62.5	32.9
5	4844.00	51.9 PK	74.0	-22.1	1.62 V	350	46.5	5.4
6	4844.00	40.8 AV	54.0	-13.2	1.62 V	350	35.4	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.34 H	64	34.3	32.9
2	2390.00	52.4 AV	54.0	-1.6	1.34 H	64	19.5	32.9
3	*2437.00	110.5 PK			1.34 H	64	77.6	32.9
4	*2437.00	98.4 AV			1.34 H	64	65.5	32.9
5	4874.00	50.9 PK	74.0	-23.1	1.12 H	53	45.6	5.3
6	4874.00	39.8 AV	54.0	-14.2	1.12 H	53	34.5	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.02 V	339	33.3	32.9
2	2390.00	50.7 AV	54.0	-3.3	1.02 V	339	17.8	32.9
3	*2437.00	108.7 PK			1.02 V	339	75.8	32.9
4	*2437.00	96.5 AV			1.02 V	339	63.6	32.9
5	4874.00	52.0 PK	74.0	-22.0	1.59 V	352	46.7	5.3
6	4874.00	40.8 AV	54.0	-13.2	1.59 V	352	35.5	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.8 PK			1.21 H	63	76.9	32.9
2	*2452.00	97.7 AV			1.21 H	63	64.8	32.9
3	2483.50	63.2 PK	74.0	-10.8	1.21 H	63	30.3	32.9
4	2483.50	49.2 AV	54.0	-4.8	1.21 H	63	16.3	32.9
5	4904.00	50.7 PK	74.0	-23.3	1.18 H	56	45.5	5.2
6	4904.00	39.5 AV	54.0	-14.5	1.18 H	56	34.3	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.3 PK			1.01 V	341	75.4	32.9
2	*2452.00	96.1 AV			1.01 V	341	63.2	32.9
3	2483.50	62.5 PK	74.0	-11.5	1.01 V	341	29.6	32.9
4	2483.50	48.8 AV	54.0	-5.2	1.01 V	341	15.9	32.9
5	4904.00	51.7 PK	74.0	-22.3	1.56 V	351	46.5	5.2
6	4904.00	39.5 AV	54.0	-14.5	1.56 V	351	34.3	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.6 PK			1.18 H	61	75.7	32.9
2	*2457.00	97.5 AV			1.18 H	61	64.6	32.9
3	2483.50	63.6 PK	74.0	-10.4	1.18 H	61	30.7	32.9
4	2483.50	49.5 AV	54.0	-4.5	1.18 H	61	16.6	32.9
5	4914.00	50.7 PK	74.0	-23.3	1.14 H	62	45.5	5.2
6	4914.00	39.6 AV	54.0	-14.4	1.14 H	62	34.4	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.1 PK			1.03 V	335	75.2	32.9
2	*2457.00	95.8 AV			1.03 V	335	62.9	32.9
3	2483.50	63.1 PK	74.0	-10.9	1.03 V	335	30.2	32.9
4	2483.50	49.0 AV	54.0	-5.0	1.03 V	335	16.1	32.9
5	4914.00	51.6 PK	74.0	-22.4	1.57 V	348	46.4	5.2
6	4914.00	40.5 AV	54.0	-13.5	1.57 V	348	35.3	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			1.07 H	61	74.6	32.9
2	*2462.00	95.4 AV			1.07 H	61	62.5	32.9
3	2483.50	63.6 PK	74.0	-10.4	1.07 H	61	30.7	32.9
4	2483.50	49.0 AV	54.0	-5.0	1.07 H	61	16.1	32.9
5	4924.00	50.6 PK	74.0	-23.4	1.14 H	53	45.3	5.3
6	4924.00	39.5 AV	54.0	-14.5	1.14 H	53	34.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.1 PK			1.03 V	337	73.2	32.9
2	*2462.00	94.0 AV			1.03 V	337	61.1	32.9
3	2483.50	63.1 PK	74.0	-10.9	1.03 V	337	30.2	32.9
4	2483.50	48.6 AV	54.0	-5.4	1.03 V	337	15.7	32.9
5	4924.00	51.6 PK	74.0	-22.4	1.57 V	359	46.3	5.3
6	4924.00	40.5 AV	54.0	-13.5	1.57 V	359	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.12 H	52	33.6	32.9
2	2390.00	47.7 AV	54.0	-6.3	1.12 H	52	14.8	32.9
3	*2412.00	119.8 PK			1.12 H	52	86.9	32.9
4	*2412.00	108.5 AV			1.12 H	52	75.6	32.9
5	4824.00	52.2 PK	74.0	-21.8	1.23 H	46	46.8	5.4
6	4824.00	41.0 AV	54.0	-13.0	1.23 H	46	35.6	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	1.00 V	349	31.9	32.9
2	2390.00	47.0 AV	54.0	-7.0	1.00 V	349	14.1	32.9
3	*2412.00	117.2 PK			1.00 V	349	84.3	32.9
4	*2412.00	105.9 AV			1.00 V	349	73.0	32.9
5	4824.00	53.2 PK	74.0	-20.8	1.06 V	359	47.8	5.4
6	4824.00	41.9 AV	54.0	-12.1	1.06 V	359	36.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.12 H	54	39.1	32.9
2	2390.00	47.6 AV	54.0	-6.4	1.12 H	54	14.7	32.9
3	*2437.00	123.6 PK			1.12 H	54	90.7	32.9
4	*2437.00	112.4 AV			1.12 H	54	79.5	32.9
5	4874.00	52.5 PK	74.0	-21.5	1.29 H	45	47.2	5.3
6	4874.00	41.3 AV	54.0	-12.7	1.29 H	45	36.0	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.02 V	346	36.7	32.9
2	2390.00	46.8 AV	54.0	-7.2	1.02 V	346	13.9	32.9
3	*2437.00	121.6 PK			1.02 V	346	88.7	32.9
4	*2437.00	110.2 AV			1.02 V	346	77.3	32.9
5	4874.00	53.4 PK	74.0	-20.6	1.08 V	352	48.1	5.3
6	4874.00	42.2 AV	54.0	-11.8	1.08 V	352	36.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.1 PK			1.11 H	55	86.2	32.9
2	*2462.00	107.8 AV			1.11 H	55	74.9	32.9
3	2483.50	63.5 PK	74.0	-10.5	1.11 H	55	30.6	32.9
4	2483.50	47.5 AV	54.0	-6.5	1.11 H	55	14.6	32.9
5	4924.00	52.1 PK	74.0	-21.9	1.23 H	48	46.8	5.3
6	4924.00	40.7 AV	54.0	-13.3	1.23 H	48	35.4	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.8 PK			1.05 V	341	83.9	32.9
2	*2462.00	105.6 AV			1.05 V	341	72.7	32.9
3	2483.50	62.2 PK	74.0	-11.8	1.05 V	341	29.3	32.9
4	2483.50	47.0 AV	54.0	-7.0	1.05 V	341	14.1	32.9
5	4924.00	52.8 PK	74.0	-21.2	1.08 V	347	47.5	5.3
6	4924.00	41.6 AV	54.0	-12.4	1.08 V	347	36.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.5 PK			1.12 H	53	85.5	33.0
2	*2467.00	107.3 AV			1.12 H	53	74.3	33.0
3	2483.50	61.5 PK	74.0	-12.5	1.12 H	53	28.6	32.9
4	2483.50	47.2 AV	54.0	-6.8	1.12 H	53	14.3	32.9
5	4934.00	51.9 PK	74.0	-22.1	1.27 H	44	46.6	5.3
6	4934.00	40.6 AV	54.0	-13.4	1.27 H	44	35.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.4 PK			1.00 V	348	83.4	33.0
2	*2467.00	105.1 AV			1.00 V	348	72.1	33.0
3	2483.50	60.8 PK	74.0	-13.2	1.00 V	348	27.9	32.9
4	2483.50	46.6 AV	54.0	-7.4	1.00 V	348	13.7	32.9
5	4934.00	52.7 PK	74.0	-21.3	1.09 V	350	47.4	5.3
6	4934.00	41.6 AV	54.0	-12.4	1.09 V	350	36.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.5 PK			1.13 H	53	83.5	33.0
2	*2472.00	105.1 AV			1.13 H	53	72.1	33.0
3	2483.50	71.9 PK	74.0	-2.1	1.13 H	53	39.0	32.9
4	2483.50	50.8 AV	54.0	-3.2	1.13 H	53	17.9	32.9
5	4944.00	51.9 PK	74.0	-22.1	1.25 H	47	46.5	5.4
6	4944.00	40.7 AV	54.0	-13.3	1.25 H	47	35.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.1 PK			1.08 V	342	81.1	33.0
2	*2472.00	102.8 AV			1.08 V	342	69.8	33.0
3	2483.50	70.5 PK	74.0	-3.5	1.08 V	342	37.6	32.9
4	2483.50	49.8 AV	54.0	-4.2	1.08 V	342	16.9	32.9
5	4944.00	52.7 PK	74.0	-21.3	1.01 V	358	47.3	5.4
6	4944.00	41.6 AV	54.0	-12.4	1.01 V	358	36.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	1.15 H	55	29.8	32.9
2	2390.00	47.5 AV	54.0	-6.5	1.15 H	55	14.6	32.9
3	*2412.00	116.5 PK			1.15 H	55	83.6	32.9
4	*2412.00	105.3 AV			1.15 H	55	72.4	32.9
5	4824.00	51.9 PK	74.0	-22.1	1.29 H	44	46.5	5.4
6	4824.00	40.7 AV	54.0	-13.3	1.29 H	44	35.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	1.03 V	339	26.8	32.9
2	2390.00	46.7 AV	54.0	-7.3	1.03 V	339	13.8	32.9
3	*2412.00	114.2 PK			1.03 V	339	81.3	32.9
4	*2412.00	102.9 AV			1.03 V	339	70.0	32.9
5	4824.00	52.9 PK	74.0	-21.1	1.07 V	355	47.5	5.4
6	4824.00	41.7 AV	54.0	-12.3	1.07 V	355	36.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	118.2 PK			1.13 H	53	85.3	32.9
2	*2437.00	107.0 AV			1.13 H	53	74.1	32.9
3	4874.00	52.2 PK	74.0	-21.8	1.31 H	46	46.9	5.3
4	4874.00	41.0 AV	54.0	-13.0	1.31 H	46	35.7	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.8 PK			1.07 V	346	82.9	32.9
2	*2437.00	104.6 AV			1.07 V	346	71.7	32.9
3	4874.00	53.1 PK	74.0	-20.9	1.08 V	359	47.8	5.3
4	4874.00	42.0 AV	54.0	-12.0	1.08 V	359	36.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.7 PK			1.41 H	57	82.8	32.9
2	*2462.00	104.5 AV			1.41 H	57	71.6	32.9
3	2483.50	61.3 PK	74.0	-12.7	1.41 H	57	28.4	32.9
4	2483.50	47.6 AV	54.0	-6.4	1.41 H	57	14.7	32.9
5	4924.00	51.8 PK	74.0	-22.2	1.34 H	52	46.5	5.3
6	4924.00	40.6 AV	54.0	-13.4	1.34 H	52	35.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			1.03 V	341	80.5	32.9
2	*2462.00	102.1 AV			1.03 V	341	69.2	32.9
3	2483.50	61.2 PK	74.0	-12.8	1.03 V	341	28.3	32.9
4	2483.50	47.1 AV	54.0	-6.9	1.03 V	341	14.2	32.9
5	4924.00	52.6 PK	74.0	-21.4	1.02 V	352	47.3	5.3
6	4924.00	41.5 AV	54.0	-12.5	1.02 V	352	36.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.8 PK			1.42 H	56	82.8	33.0
2	*2467.00	104.6 AV			1.42 H	56	71.6	33.0
3	2483.50	62.2 PK	74.0	-11.8	1.42 H	56	29.3	32.9
4	2483.50	48.0 AV	54.0	-6.0	1.42 H	56	15.1	32.9
5	4934.00	51.6 PK	74.0	-22.4	1.28 H	51	46.3	5.3
6	4934.00	40.5 AV	54.0	-13.5	1.28 H	51	35.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.7 PK			1.04 V	346	80.7	33.0
2	*2467.00	102.4 AV			1.04 V	346	69.4	33.0
3	2483.50	60.8 PK	74.0	-13.2	1.04 V	346	27.9	32.9
4	2483.50	47.1 AV	54.0	-6.9	1.04 V	346	14.2	32.9
5	4934.00	52.4 PK	74.0	-21.6	1.05 V	356	47.1	5.3
6	4934.00	41.4 AV	54.0	-12.6	1.05 V	356	36.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.2 PK			1.45 H	53	81.2	33.0
2	*2472.00	102.9 AV			1.45 H	53	69.9	33.0
3	2483.50	70.8 PK	74.0	-3.2	1.45 H	53	37.9	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.45 H	53	19.5	32.9
5	4944.00	51.7 PK	74.0	-22.3	1.32 H	48	46.3	5.4
6	4944.00	40.6 AV	54.0	-13.4	1.32 H	48	35.2	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.7 PK			1.01 V	347	78.7	33.0
2	*2472.00	100.5 AV			1.01 V	347	67.5	33.0
3	2483.50	69.5 PK	74.0	-4.5	1.01 V	347	36.6	32.9
4	2483.50	51.0 AV	54.0	-3.0	1.01 V	347	18.1	32.9
5	4944.00	52.6 PK	74.0	-21.4	1.05 V	355	47.2	5.4
6	4944.00	41.4 AV	54.0	-12.6	1.05 V	355	36.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.20 H	54	30.6	32.9
2	2390.00	47.9 AV	54.0	-6.1	1.20 H	54	15.0	32.9
3	*2412.00	114.5 PK			1.20 H	54	81.6	32.9
4	*2412.00	103.2 AV			1.20 H	54	70.3	32.9
5	4824.00	51.5 PK	74.0	-22.5	1.24 H	48	46.1	5.4
6	4824.00	40.3 AV	54.0	-13.7	1.24 H	48	34.9	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	1.04 V	332	28.6	32.9
2	2390.00	47.2 AV	54.0	-6.8	1.04 V	332	14.3	32.9
3	*2412.00	112.1 PK			1.04 V	332	79.2	32.9
4	*2412.00	100.7 AV			1.04 V	332	67.8	32.9
5	4824.00	52.6 PK	74.0	-21.4	1.02 V	358	47.2	5.4
6	4824.00	41.5 AV	54.0	-12.5	1.02 V	358	36.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.1 PK			1.02 H	54	84.2	32.9
2	*2437.00	105.6 AV			1.02 H	54	72.7	32.9
3	4874.00	52.0 PK	74.0	-22.0	1.27 H	45	46.7	5.3
4	4874.00	40.7 AV	54.0	-13.3	1.27 H	45	35.4	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.6 PK			1.06 V	337	81.7	32.9
2	*2437.00	103.2 AV			1.06 V	337	70.3	32.9
3	4874.00	52.9 PK	74.0	-21.1	1.07 V	351	47.6	5.3
4	4874.00	41.7 AV	54.0	-12.3	1.07 V	351	36.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.2 PK			1.11 H	59	80.3	32.9
2	*2462.00	101.9 AV			1.11 H	59	69.0	32.9
3	2483.50	62.3 PK	74.0	-11.7	1.11 H	59	29.4	32.9
4	2483.50	48.1 AV	54.0	-5.9	1.11 H	59	15.2	32.9
5	4924.00	51.6 PK	74.0	-22.4	1.28 H	50	46.3	5.3
6	4924.00	40.6 AV	54.0	-13.4	1.28 H	50	35.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.8 PK			1.02 V	336	77.9	32.9
2	*2462.00	99.6 AV			1.02 V	336	66.7	32.9
3	2483.50	60.8 PK	74.0	-13.2	1.02 V	336	27.9	32.9
4	2483.50	47.4 AV	54.0	-6.6	1.02 V	336	14.5	32.9
5	4924.00	52.4 PK	74.0	-21.6	1.09 V	352	47.1	5.3
6	4924.00	41.4 AV	54.0	-12.6	1.09 V	352	36.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.5 PK			1.12 H	56	78.5	33.0
2	*2467.00	100.2 AV			1.12 H	56	67.2	33.0
3	2483.50	62.6 PK	74.0	-11.4	1.12 H	56	29.7	32.9
4	2483.50	48.2 AV	54.0	-5.8	1.12 H	56	15.3	32.9
5	4934.00	51.4 PK	74.0	-22.6	1.25 H	48	46.1	5.3
6	4934.00	40.2 AV	54.0	-13.8	1.25 H	48	34.9	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.2 PK			1.03 V	339	76.2	33.0
2	*2467.00	97.8 AV			1.03 V	339	64.8	33.0
3	2483.50	61.3 PK	74.0	-12.7	1.03 V	339	28.4	32.9
4	2483.50	47.2 AV	54.0	-6.8	1.03 V	339	14.3	32.9
5	4934.00	52.2 PK	74.0	-21.8	1.01 V	348	46.9	5.3
6	4934.00	41.1 AV	54.0	-12.9	1.01 V	348	35.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.9 PK			1.15 H	56	77.9	33.0
2	*2472.00	99.7 AV			1.15 H	56	66.7	33.0
3	2483.50	68.6 PK	74.0	-5.4	1.15 H	56	35.7	32.9
4	2483.50	51.6 AV	54.0	-2.4	1.15 H	56	18.7	32.9
5	4944.00	51.6 PK	74.0	-22.4	1.37 H	41	46.2	5.4
6	4944.00	40.4 AV	54.0	-13.6	1.37 H	41	35.0	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.6 PK			1.00 V	347	75.6	33.0
2	*2472.00	97.3 AV			1.00 V	347	64.3	33.0
3	2483.50	69.6 PK	74.0	-4.4	1.00 V	347	36.7	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.00 V	347	17.8	32.9
5	4944.00	52.3 PK	74.0	-21.7	1.03 V	350	46.9	5.4
6	4944.00	41.2 AV	54.0	-12.8	1.03 V	350	35.8	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.17 H	60	39.0	32.9
2	2390.00	48.9 AV	54.0	-5.1	1.17 H	60	16.0	32.9
3	*2412.00	117.9 PK			1.17 H	60	85.0	32.9
4	*2412.00	106.2 AV			1.17 H	60	73.3	32.9
5	4824.00	51.5 PK	74.0	-22.5	1.37 H	50	46.1	5.4
6	4824.00	40.4 AV	54.0	-13.6	1.37 H	50	35.0	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.00 V	352	35.0	32.9
2	2390.00	48.4 AV	54.0	-5.6	1.00 V	352	15.5	32.9
3	*2412.00	115.3 PK			1.00 V	352	82.4	32.9
4	*2412.00	104.5 AV			1.00 V	352	71.6	32.9
5	4824.00	52.3 PK	74.0	-21.7	1.03 V	350	46.9	5.4
6	4824.00	41.2 AV	54.0	-12.8	1.03 V	350	35.8	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.2 PK			1.12 H	64	86.3	32.9
2	*2437.00	107.1 AV			1.12 H	64	74.2	32.9
3	4874.00	52.3 PK	74.0	-21.7	1.12 H	50	47.0	5.3
4	4874.00	40.8 AV	54.0	-13.2	1.12 H	50	35.5	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.3 PK			1.00 V	355	84.4	32.9
2	*2437.00	105.2 AV			1.00 V	355	72.3	32.9
3	4874.00	52.7 PK	74.0	-21.3	1.03 V	344	47.4	5.3
4	4874.00	41.5 AV	54.0	-12.5	1.03 V	344	36.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.1 PK			1.11 H	68	82.2	32.9
2	*2462.00	103.4 AV			1.11 H	68	70.5	32.9
3	2483.50	60.9 PK	74.0	-13.1	1.11 H	68	28.0	32.9
4	2483.50	47.9 AV	54.0	-6.1	1.11 H	68	15.0	32.9
5	4924.00	51.6 PK	74.0	-22.4	1.21 H	68	46.3	5.3
6	4924.00	40.4 AV	54.0	-13.6	1.21 H	68	35.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			1.02 V	357	80.5	32.9
2	*2462.00	101.9 AV			1.02 V	357	69.0	32.9
3	2483.50	59.9 PK	74.0	-14.1	1.02 V	357	27.0	32.9
4	2483.50	46.7 AV	54.0	-7.3	1.02 V	357	13.8	32.9
5	4924.00	51.9 PK	74.0	-22.1	1.09 V	352	46.6	5.3
6	4924.00	40.5 AV	54.0	-13.5	1.09 V	352	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.3 PK			1.13 H	64	81.3	33.0
2	*2467.00	101.3 AV			1.13 H	64	68.3	33.0
3	2483.50	59.3 PK	74.0	-14.7	1.13 H	64	26.4	32.9
4	2483.50	46.7 AV	54.0	-7.3	1.13 H	64	13.8	32.9
5	4934.00	51.3 PK	74.0	-22.7	1.21 H	52	46.0	5.3
6	4934.00	40.6 AV	54.0	-13.4	1.21 H	52	35.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.0 PK			1.00 V	355	80.0	33.0
2	*2467.00	100.4 AV			1.00 V	355	67.4	33.0
3	2483.50	59.4 PK	74.0	-14.6	1.00 V	355	26.5	32.9
4	2483.50	46.6 AV	54.0	-7.4	1.00 V	355	13.7	32.9
5	4934.00	52.1 PK	74.0	-21.9	1.03 V	352	46.8	5.3
6	4934.00	41.5 AV	54.0	-12.5	1.03 V	352	36.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.5 PK			1.49 H	66	82.5	33.0
2	*2472.00	101.9 AV			1.49 H	66	68.9	33.0
3	2483.50	64.9 PK	74.0	-9.1	1.49 H	66	32.0	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.49 H	66	17.8	32.9
5	4944.00	51.8 PK	74.0	-22.2	1.19 H	55	46.4	5.4
6	4944.00	40.7 AV	54.0	-13.3	1.19 H	55	35.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.5 PK			1.00 V	352	81.5	33.0
2	*2472.00	100.5 AV			1.00 V	352	67.5	33.0
3	2483.50	63.3 PK	74.0	-10.7	1.00 V	352	30.4	32.9
4	2483.50	49.3 AV	54.0	-4.7	1.00 V	352	16.4	32.9
5	4944.00	51.9 PK	74.0	-22.1	1.03 V	342	46.5	5.4
6	4944.00	41.5 AV	54.0	-12.5	1.03 V	342	36.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.15 H	44	31.5	32.9
2	2390.00	48.4 AV	54.0	-5.6	1.15 H	44	15.5	32.9
3	*2412.00	114.4 PK			1.15 H	44	81.5	32.9
4	*2412.00	102.4 AV			1.15 H	44	69.5	32.9
5	4824.00	51.7 PK	74.0	-22.3	1.32 H	48	46.3	5.4
6	4824.00	40.6 AV	54.0	-13.4	1.32 H	48	35.2	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.00 V	350	29.2	32.9
2	2390.00	47.5 AV	54.0	-6.5	1.00 V	350	14.6	32.9
3	*2412.00	112.1 PK			1.00 V	350	79.2	32.9
4	*2412.00	99.7 AV			1.00 V	350	66.8	32.9
5	4824.00	52.6 PK	74.0	-21.4	1.06 V	355	47.2	5.4
6	4824.00	41.4 AV	54.0	-12.6	1.06 V	355	36.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	118.0 PK			1.38 H	60	85.1	32.9
2	*2437.00	105.5 AV			1.38 H	60	72.6	32.9
3	4874.00	51.3 PK	74.0	-22.7	1.22 H	50	46.0	5.3
4	4874.00	40.3 AV	54.0	-13.7	1.22 H	50	35.0	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.9 PK			1.11 V	353	83.0	32.9
2	*2437.00	104.0 AV			1.11 V	353	71.1	32.9
3	4874.00	52.1 PK	74.0	-21.9	1.06 V	352	46.8	5.3
4	4874.00	40.9 AV	54.0	-13.1	1.06 V	352	35.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.1 PK			1.32 H	60	81.2	32.9
2	*2462.00	102.5 AV			1.32 H	60	69.6	32.9
3	2483.50	69.4 PK	74.0	-4.6	1.32 H	60	36.5	32.9
4	2483.50	48.5 AV	54.0	-5.5	1.32 H	60	15.6	32.9
5	4924.00	51.8 PK	74.0	-22.2	1.23 H	53	46.5	5.3
6	4924.00	40.6 AV	54.0	-13.4	1.23 H	53	35.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.00 V	350	80.0	32.9
2	*2462.00	101.4 AV			1.00 V	350	68.5	32.9
3	2483.50	68.1 PK	74.0	-5.9	1.00 V	350	35.2	32.9
4	2483.50	48.0 AV	54.0	-6.0	1.00 V	350	15.1	32.9
5	4924.00	52.1 PK	74.0	-21.9	1.02 V	355	46.8	5.3
6	4924.00	41.4 AV	54.0	-12.6	1.02 V	355	36.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.2 PK			1.06 H	61	81.2	33.0
2	*2467.00	102.2 AV			1.06 H	61	69.2	33.0
3	2483.50	63.9 PK	74.0	-10.1	1.06 H	61	31.0	32.9
4	2483.50	50.9 AV	54.0	-3.1	1.06 H	61	18.0	32.9
5	4934.00	51.4 PK	74.0	-22.6	1.23 H	55	46.1	5.3
6	4934.00	40.4 AV	54.0	-13.6	1.23 H	55	35.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.6 PK			1.02 V	352	79.6	33.0
2	*2467.00	100.8 AV			1.02 V	352	67.8	33.0
3	2483.50	63.4 PK	74.0	-10.6	1.02 V	352	30.5	32.9
4	2483.50	49.5 AV	54.0	-4.5	1.02 V	352	16.6	32.9
5	4934.00	52.1 PK	74.0	-21.9	1.06 V	355	46.8	5.3
6	4934.00	40.9 AV	54.0	-13.1	1.06 V	355	35.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.5 PK			1.49 H	66	82.5	33.0
2	*2472.00	101.9 AV			1.49 H	66	68.9	33.0
3	2483.50	64.9 PK	74.0	-9.1	1.49 H	66	32.0	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.49 H	66	17.8	32.9
5	4944.00	51.8 PK	74.0	-22.2	1.19 H	55	46.4	5.4
6	4944.00	40.7 AV	54.0	-13.3	1.19 H	55	35.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.5 PK			1.00 V	352	81.5	33.0
2	*2472.00	100.5 AV			1.00 V	352	67.5	33.0
3	2483.50	63.3 PK	74.0	-10.7	1.00 V	352	30.4	32.9
4	2483.50	49.3 AV	54.0	-4.7	1.00 V	352	16.4	32.9
5	4944.00	51.9 PK	74.0	-22.1	1.03 V	342	46.5	5.4
6	4944.00	41.5 AV	54.0	-12.5	1.03 V	342	36.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

2TX (Test Mode A - PIFA Antenna)

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.17 H	48	32.4	32.9
2	2390.00	52.4 AV	54.0	-1.6	1.17 H	48	19.5	32.9
3	*2412.00	115.7 PK			1.21 H	23	82.8	32.9
4	*2412.00	112.9 AV			1.21 H	23	80.0	32.9
5	4824.00	52.6 PK	74.0	-21.4	1.05 H	49	47.2	5.4
6	4824.00	42.7 AV	54.0	-11.3	1.05 H	49	37.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.06 V	350	31.2	32.9
2	2390.00	50.4 AV	54.0	-3.6	1.06 V	350	17.5	32.9
3	*2412.00	113.7 PK			1.06 V	350	80.8	32.9
4	*2412.00	111.4 AV			1.06 V	350	78.5	32.9
5	4824.00	51.1 PK	74.0	-22.9	1.00 V	18	45.7	5.4
6	4824.00	41.3 AV	54.0	-12.7	1.00 V	18	35.9	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.6 PK			1.00 H	66	82.7	32.9
2	*2437.00	113.8 AV			1.00 H	66	80.9	32.9
3	4874.00	53.5 PK	74.0	-20.5	1.00 H	66	48.2	5.3
4	4874.00	47.5 AV	54.0	-6.5	1.00 H	66	42.2	5.3
5	7311.00	58.4 PK	74.0	-15.6	2.37 H	46	47.6	10.8
6	7311.00	51.3 AV	54.0	-2.7	2.37 H	46	40.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.7 PK			1.20 V	4	80.8	32.9
2	*2437.00	111.5 AV			1.20 V	4	78.6	32.9
3	4874.00	52.8 PK	74.0	-21.2	1.00 V	7	47.5	5.3
4	4874.00	47.3 AV	54.0	-6.7	1.00 V	7	42.0	5.3
5	7311.00	57.7 PK	74.0	-16.3	1.03 V	2	46.9	10.8
6	7311.00	50.8 AV	54.0	-3.2	1.03 V	2	40.0	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.2 PK			1.14 H	28	82.3	32.9
2	*2462.00	112.5 AV			1.14 H	28	79.6	32.9
3	2483.50	63.9 PK	74.0	-10.1	1.14 H	25	31.0	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.14 H	25	19.6	32.9
5	4924.00	51.9 PK	74.0	-22.1	1.06 H	50	46.6	5.3
6	4924.00	44.6 AV	54.0	-9.4	1.06 H	50	39.3	5.3
7	7386.00	58.7 PK	74.0	-15.3	1.00 H	63	47.7	11.0
8	7386.00	51.0 AV	54.0	-3.0	1.00 H	63	40.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.8 PK			1.08 V	2	80.9	32.9
2	*2462.00	111.4 AV			1.08 V	2	78.5	32.9
3	2483.50	61.7 PK	74.0	-12.3	1.08 V	2	28.8	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.08 V	2	18.5	32.9
5	4924.00	51.7 PK	74.0	-22.3	1.04 V	17	46.4	5.3
6	4924.00	44.2 AV	54.0	-9.8	1.04 V	17	38.9	5.3
7	7386.00	58.3 PK	74.0	-15.7	1.11 V	7	47.3	11.0
8	7386.00	50.5 AV	54.0	-3.5	1.11 V	7	39.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.6 PK			1.07 H	34	76.6	33.0
2	*2467.00	107.0 AV			1.07 H	34	74.0	33.0
3	2483.50	62.9 PK	74.0	-11.1	1.07 H	34	30.0	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.07 H	34	19.5	32.9
5	4934.00	50.9 PK	74.0	-23.1	1.03 H	55	45.6	5.3
6	4934.00	40.4 AV	54.0	-13.6	1.03 H	55	35.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.4 PK			1.03 V	0	75.4	33.0
2	*2467.00	105.9 AV			1.03 V	0	72.9	33.0
3	2483.50	61.7 PK	74.0	-12.3	1.03 V	0	28.8	32.9
4	2483.50	51.5 AV	54.0	-2.5	1.03 V	0	18.6	32.9
5	4934.00	50.5 PK	74.0	-23.5	1.02 V	21	45.2	5.3
6	4934.00	40.1 AV	54.0	-13.9	1.02 V	21	34.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.1 PK			1.00 H	5	73.1	33.0
2	*2472.00	104.0 AV			1.00 H	5	71.0	33.0
3	2483.50	61.2 PK	74.0	-12.8	1.00 H	5	28.3	32.9
4	2483.50	50.9 AV	54.0	-3.1	1.00 H	5	18.0	32.9
5	4944.00	51.0 PK	74.0	-23.0	1.01 H	55	45.6	5.4
6	4944.00	40.5 AV	54.0	-13.5	1.01 H	55	35.1	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.2 PK			1.05 V	8	72.2	33.0
2	*2472.00	103.3 AV			1.05 V	8	70.3	33.0
3	2483.50	60.9 PK	74.0	-13.1	1.05 V	8	28.0	32.9
4	2483.50	50.1 AV	54.0	-3.9	1.05 V	8	17.2	32.9
5	4944.00	50.5 PK	74.0	-23.5	1.03 V	22	45.1	5.4
6	4944.00	40.0 AV	54.0	-14.0	1.03 V	22	34.6	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.15 H	33	36.7	32.9
2	2390.00	52.4 AV	54.0	-1.6	1.15 H	33	19.5	32.9
3	*2412.00	115.7 PK			1.15 H	33	82.8	32.9
4	*2412.00	106.6 AV			1.15 H	33	73.7	32.9
5	4824.00	52.2 PK	74.0	-21.8	1.03 H	51	46.8	5.4
6	4824.00	39.6 AV	54.0	-14.4	1.03 H	51	34.2	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.01 V	1	35.0	32.9
2	2390.00	51.8 AV	54.0	-2.2	1.01 V	1	18.9	32.9
3	*2412.00	113.9 PK			1.01 V	1	81.0	32.9
4	*2412.00	104.5 AV			1.01 V	1	71.6	32.9
5	4824.00	53.2 PK	74.0	-20.8	1.05 V	23	47.8	5.4
6	4824.00	40.1 AV	54.0	-13.9	1.05 V	23	34.7	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.00 H	54	34.3	32.9
2	2390.00	52.2 AV	54.0	-1.8	1.00 H	54	19.3	32.9
3	*2417.00	116.1 PK			1.00 H	54	83.2	32.9
4	*2417.00	106.7 AV			1.00 H	54	73.8	32.9
5	4834.00	52.3 PK	74.0	-21.7	1.03 H	51	46.9	5.4
6	4834.00	39.2 AV	54.0	-14.8	1.03 H	51	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.06 V	0	30.6	32.9
2	2390.00	50.2 AV	54.0	-3.8	1.06 V	0	17.3	32.9
3	*2417.00	113.2 PK			1.06 V	0	80.3	32.9
4	*2417.00	104.3 AV			1.06 V	0	71.4	32.9
5	4834.00	52.1 PK	74.0	-21.9	1.03 V	28	46.7	5.4
6	4834.00	39.0 AV	54.0	-15.0	1.03 V	28	33.6	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	117.7 PK			1.00 H	59	84.8	32.9
2	*2437.00	108.3 AV			1.00 H	59	75.4	32.9
3	4874.00	52.8 PK	74.0	-21.2	1.08 H	59	47.5	5.3
4	4874.00	40.8 AV	54.0	-13.2	1.08 H	59	35.5	5.3
5	7311.00	59.7 PK	74.0	-14.3	2.20 H	67	48.9	10.8
6	7311.00	46.3 AV	54.0	-7.7	2.20 H	67	35.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.7 PK			1.06 V	4	83.8	32.9
2	*2437.00	106.5 AV			1.06 V	4	73.6	32.9
3	4874.00	52.3 PK	74.0	-21.7	1.02 V	32	47.0	5.3
4	4874.00	40.3 AV	54.0	-13.7	1.02 V	32	35.0	5.3
5	7311.00	58.8 PK	74.0	-15.2	1.19 V	3	48.0	10.8
6	7311.00	46.0 AV	54.0	-8.0	1.19 V	3	35.2	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.4 PK			1.05 H	57	81.5	32.9
2	*2462.00	105.2 AV			1.05 H	57	72.3	32.9
3	2483.50	64.4 PK	74.0	-9.6	1.05 H	57	31.5	32.9
4	2483.50	49.4 AV	54.0	-4.6	1.05 H	57	16.5	32.9
5	4924.00	53.1 PK	74.0	-20.9	1.20 H	50	47.8	5.3
6	4924.00	40.0 AV	54.0	-14.0	1.20 H	50	34.7	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.1 PK			1.07 V	0	80.2	32.9
2	*2462.00	103.4 AV			1.07 V	0	70.5	32.9
3	2483.50	63.6 PK	74.0	-10.4	1.07 V	0	30.7	32.9
4	2483.50	48.8 AV	54.0	-5.2	1.07 V	0	15.9	32.9
5	4924.00	52.4 PK	74.0	-21.6	1.07 V	22	47.1	5.3
6	4924.00	39.4 AV	54.0	-14.6	1.07 V	22	34.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.5 PK			1.05 H	64	81.5	33.0
2	*2467.00	104.6 AV			1.05 H	64	71.6	33.0
3	2483.50	64.1 PK	74.0	-9.9	1.05 H	64	31.2	32.9
4	2483.50	51.8 AV	54.0	-2.2	1.05 H	64	18.9	32.9
5	4934.00	52.8 PK	74.0	-21.2	1.17 H	52	47.5	5.3
6	4934.00	40.0 AV	54.0	-14.0	1.17 H	52	34.7	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.0 PK			1.04 V	1	80.0	33.0
2	*2467.00	103.4 AV			1.04 V	1	70.4	33.0
3	2483.50	62.1 PK	74.0	-11.9	1.04 V	1	29.2	32.9
4	2483.50	50.1 AV	54.0	-3.9	1.04 V	1	17.2	32.9
5	4934.00	52.6 PK	74.0	-21.4	1.02 V	22	47.3	5.3
6	4934.00	39.6 AV	54.0	-14.4	1.02 V	22	34.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.6 PK			1.77 H	21	79.6	33.0
2	*2472.00	103.8 AV			1.77 H	21	70.8	33.0
3	2483.50	68.1 PK	74.0	-5.9	1.77 H	21	35.2	32.9
4	2483.50	52.2 AV	54.0	-1.8	1.77 H	21	19.3	32.9
5	4944.00	52.9 PK	74.0	-21.1	1.11 H	53	47.5	5.4
6	4944.00	39.7 AV	54.0	-14.3	1.11 H	53	34.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.3 PK			1.01 V	6	79.3	33.0
2	*2472.00	102.3 AV			1.01 V	6	69.3	33.0
3	2483.50	66.4 PK	74.0	-7.6	1.01 V	6	33.5	32.9
4	2483.50	50.4 AV	54.0	-3.6	1.01 V	6	17.5	32.9
5	4944.00	52.7 PK	74.0	-21.3	1.05 V	23	47.3	5.4
6	4944.00	39.5 AV	54.0	-14.5	1.05 V	23	34.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.12 H	56	31.6	32.9
2	2390.00	52.1 AV	54.0	-1.9	1.12 H	56	19.2	32.9
3	*2412.00	116.5 PK			1.12 H	56	83.6	32.9
4	*2412.00	105.4 AV			1.12 H	56	72.5	32.9
5	4824.00	53.4 PK	74.0	-20.6	1.18 H	51	48.0	5.4
6	4824.00	40.4 AV	54.0	-13.6	1.18 H	51	35.0	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.19 V	352	30.8	32.9
2	2390.00	51.4 AV	54.0	-2.6	1.19 V	352	18.5	32.9
3	*2412.00	115.3 PK			1.19 V	352	82.4	32.9
4	*2412.00	103.3 AV			1.19 V	352	70.4	32.9
5	4824.00	53.2 PK	74.0	-20.8	1.06 V	27	47.8	5.4
6	4824.00	39.9 AV	54.0	-14.1	1.06 V	27	34.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.00 H	60	38.8	32.9
2	2390.00	51.7 AV	54.0	-2.3	1.00 H	60	18.8	32.9
3	*2437.00	119.9 PK			1.00 H	60	87.0	32.9
4	*2437.00	109.1 AV			1.00 H	60	76.2	32.9
5	2483.50	72.4 PK	74.0	-1.6	1.00 H	60	39.5	32.9
6	2483.50	49.4 AV	54.0	-4.6	1.00 H	60	16.5	32.9
7	4874.00	53.4 PK	74.0	-20.6	1.23 H	51	48.1	5.3
8	4874.00	40.3 AV	54.0	-13.7	1.23 H	51	35.0	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.00 V	350	36.0	32.9
2	2390.00	49.9 AV	54.0	-4.1	1.00 V	350	17.0	32.9
3	*2437.00	119.4 PK			1.00 V	350	86.5	32.9
4	*2437.00	108.1 AV			1.00 V	350	75.2	32.9
5	2483.50	71.7 PK	74.0	-2.3	1.00 V	350	38.8	32.9
6	2483.50	49.2 AV	54.0	-4.8	1.00 V	350	16.3	32.9
7	4874.00	53.1 PK	74.0	-20.9	1.02 V	23	47.8	5.3
8	4874.00	40.2 AV	54.0	-13.8	1.02 V	23	34.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.0 PK			1.20 H	21	85.1	32.9
2	*2462.00	106.4 AV			1.20 H	21	73.5	32.9
3	2483.50	70.1 PK	74.0	-3.9	1.20 H	21	37.2	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.20 H	21	19.6	32.9
5	4924.00	53.1 PK	74.0	-20.9	1.27 H	55	47.8	5.3
6	4924.00	40.0 AV	54.0	-14.0	1.27 H	55	34.7	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.1 PK			1.00 V	8	84.2	32.9
2	*2462.00	105.5 AV			1.00 V	8	72.6	32.9
3	2483.50	68.9 PK	74.0	-5.1	1.00 V	8	36.0	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.00 V	8	18.5	32.9
5	4924.00	52.6 PK	74.0	-21.4	1.09 V	28	47.3	5.3
6	4924.00	39.9 AV	54.0	-14.1	1.09 V	28	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.6 PK			1.00 H	25	83.6	33.0
2	*2467.00	104.6 AV			1.00 H	25	71.6	33.0
3	2483.50	65.4 PK	74.0	-8.6	1.00 H	25	32.5	32.9
4	2483.50	50.8 AV	54.0	-3.2	1.00 H	25	17.9	32.9
5	4934.00	52.9 PK	74.0	-21.1	1.16 H	50	47.6	5.3
6	4934.00	39.7 AV	54.0	-14.3	1.16 H	50	34.4	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.7 PK			1.00 V	12	81.7	33.0
2	*2467.00	103.7 AV			1.00 V	12	70.7	33.0
3	2483.50	61.9 PK	74.0	-12.1	1.00 V	12	29.0	32.9
4	2483.50	49.6 AV	54.0	-4.4	1.00 V	12	16.7	32.9
5	4934.00	52.7 PK	74.0	-21.3	1.00 V	33	47.4	5.3
6	4934.00	39.6 AV	54.0	-14.4	1.00 V	33	34.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.2 PK			1.34 H	65	81.2	33.0
2	*2472.00	103.0 AV			1.34 H	65	70.0	33.0
3	2483.50	72.4 PK	74.0	-1.6	1.35 H	65	39.5	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.35 H	65	19.5	32.9
5	4944.00	52.9 PK	74.0	-21.1	1.17 H	52	47.5	5.4
6	4944.00	40.0 AV	54.0	-14.0	1.17 H	52	34.6	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.2 PK			1.00 V	8	80.2	33.0
2	*2472.00	102.7 AV			1.00 V	8	69.7	33.0
3	2483.50	71.9 PK	74.0	-2.1	1.00 V	8	39.0	32.9
4	2483.50	51.8 AV	54.0	-2.2	1.00 V	8	18.9	32.9
5	4944.00	52.7 PK	74.0	-21.3	1.07 V	20	47.3	5.4
6	4944.00	39.6 AV	54.0	-14.4	1.07 V	20	34.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	1.21 H	30	33.0	32.9
2	2390.00	52.4 AV	54.0	-1.6	1.21 H	30	19.5	32.9
3	*2422.00	112.4 PK			1.21 H	30	79.5	32.9
4	*2422.00	100.6 AV			1.21 H	30	67.7	32.9
5	4844.00	53.0 PK	74.0	-21.0	1.15 H	54	47.6	5.4
6	4844.00	39.9 AV	54.0	-14.1	1.15 H	54	34.5	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.00 V	1	32.0	32.9
2	2390.00	50.5 AV	54.0	-3.5	1.00 V	1	17.6	32.9
3	*2422.00	111.1 PK			1.00 V	1	78.2	32.9
4	*2422.00	98.7 AV			1.00 V	1	65.8	32.9
5	4844.00	52.4 PK	74.0	-21.6	1.02 V	29	47.0	5.4
6	4844.00	39.5 AV	54.0	-14.5	1.02 V	29	34.1	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.62 H	27	33.9	32.9
2	2390.00	52.4 AV	54.0	-1.6	1.62 H	27	19.5	32.9
3	*2437.00	114.9 PK			1.62 H	27	82.0	32.9
4	*2437.00	102.4 AV			1.62 H	27	69.5	32.9
5	4874.00	53.3 PK	74.0	-20.7	1.17 H	0	48.0	5.3
6	4874.00	39.8 AV	54.0	-14.2	1.17 H	0	34.5	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	1.00 V	2	32.1	32.9
2	2390.00	51.2 AV	54.0	-2.8	1.00 V	2	18.3	32.9
3	*2437.00	113.2 PK			1.00 V	2	80.3	32.9
4	*2437.00	100.7 AV			1.00 V	2	67.8	32.9
5	4874.00	52.8 PK	74.0	-21.2	1.05 V	33	47.5	5.3
6	4874.00	39.5 AV	54.0	-14.5	1.05 V	33	34.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	114.6 PK			1.00 H	31	81.7	32.9
2	*2452.00	103.1 AV			1.00 H	31	70.2	32.9
3	2483.50	67.6 PK	74.0	-6.4	1.00 H	31	34.7	32.9
4	2483.50	52.2 AV	54.0	-1.8	1.00 H	31	19.3	32.9
5	4904.00	52.8 PK	74.0	-21.2	1.18 H	57	47.6	5.2
6	4904.00	39.5 AV	54.0	-14.5	1.18 H	57	34.3	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	112.4 PK			1.03 V	2	79.5	32.9
2	*2452.00	101.4 AV			1.03 V	2	68.5	32.9
3	2483.50	65.5 PK	74.0	-8.5	1.03 V	2	32.6	32.9
4	2483.50	51.6 AV	54.0	-2.4	1.03 V	2	18.7	32.9
5	4904.00	52.2 PK	74.0	-21.8	1.07 V	22	47.0	5.2
6	4904.00	39.2 AV	54.0	-14.8	1.07 V	22	34.0	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.4 PK			1.77 H	30	80.5	32.9
2	*2457.00	100.9 AV			1.77 H	30	68.0	32.9
3	2483.50	68.1 PK	74.0	-5.9	1.77 H	30	35.2	32.9
4	2483.50	52.2 AV	54.0	-1.8	1.77 H	30	19.3	32.9
5	4914.00	52.8 PK	74.0	-21.2	1.20 H	52	47.6	5.2
6	4914.00	39.6 AV	54.0	-14.4	1.20 H	52	34.4	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.4 PK			1.00 V	3	79.5	32.9
2	*2457.00	100.4 AV			1.00 V	3	67.5	32.9
3	2483.50	67.5 PK	74.0	-6.5	1.00 V	3	34.6	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.00 V	3	18.5	32.9
5	4914.00	52.4 PK	74.0	-21.6	1.00 V	27	47.2	5.2
6	4914.00	39.2 AV	54.0	-14.8	1.00 V	27	34.0	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.0 PK			1.21 H	22	78.1	32.9
2	*2462.00	100.4 AV			1.21 H	22	67.5	32.9
3	2483.50	69.6 PK	74.0	-4.4	1.21 H	22	36.7	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.21 H	22	19.6	32.9
5	4924.00	52.8 PK	74.0	-21.2	1.11 H	52	47.5	5.3
6	4924.00	39.6 AV	54.0	-14.4	1.11 H	52	34.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.8 PK			1.00 V	344	76.9	32.9
2	*2462.00	99.6 AV			1.00 V	344	66.7	32.9
3	2483.50	68.9 PK	74.0	-5.1	1.00 V	344	36.0	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.00 V	344	18.5	32.9
5	4924.00	52.6 PK	74.0	-21.4	1.13 V	27	47.3	5.3
6	4924.00	39.5 AV	54.0	-14.5	1.13 V	27	34.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.02 H	24	34.9	32.9
2	2390.00	48.2 AV	54.0	-5.8	1.02 H	24	15.3	32.9
3	*2412.00	125.2 PK			1.02 H	24	92.3	32.9
4	*2412.00	113.5 AV			1.02 H	24	80.6	32.9
5	4824.00	53.9 PK	74.0	-20.1	1.32 H	56	48.5	5.4
6	4824.00	41.7 AV	54.0	-12.3	1.32 H	56	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	1.00 V	356	33.7	32.9
2	2390.00	47.8 AV	54.0	-6.2	1.00 V	356	14.9	32.9
3	*2412.00	123.2 PK			1.00 V	356	90.3	32.9
4	*2412.00	111.6 AV			1.00 V	356	78.7	32.9
5	4824.00	54.5 PK	74.0	-19.5	1.25 V	347	49.1	5.4
6	4824.00	42.4 AV	54.0	-11.6	1.25 V	347	37.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	126.2 PK			1.51 H	23	93.3	32.9
2	*2437.00	114.6 AV			1.51 H	23	81.7	32.9
3	4874.00	53.9 PK	74.0	-20.1	1.39 H	58	48.6	5.3
4	4874.00	41.6 AV	54.0	-12.4	1.39 H	58	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	124.4 PK			1.08 V	357	91.5	32.9
2	*2437.00	112.8 AV			1.08 V	357	79.9	32.9
3	4874.00	54.6 PK	74.0	-19.4	1.24 V	345	49.3	5.3
4	4874.00	42.4 AV	54.0	-11.6	1.24 V	345	37.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	124.1 PK			1.51 H	26	91.2	32.9
2	*2462.00	112.5 AV			1.51 H	26	79.6	32.9
3	2483.50	67.0 PK	74.0	-7.0	1.51 H	26	34.1	32.9
4	2483.50	48.0 AV	54.0	-6.0	1.51 H	26	15.1	32.9
5	4924.00	53.7 PK	74.0	-20.3	1.39 H	52	48.4	5.3
6	4924.00	41.6 AV	54.0	-12.4	1.39 H	52	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.2 PK			1.01 V	351	79.3	32.9
2	*2462.00	110.6 AV			1.01 V	351	77.7	32.9
3	2483.50	65.5 PK	74.0	-8.5	1.01 V	351	32.6	32.9
4	2483.50	47.1 AV	54.0	-6.9	1.01 V	351	14.2	32.9
5	4924.00	54.3 PK	74.0	-19.7	1.22 V	348	49.0	5.3
6	4924.00	42.1 AV	54.0	-11.9	1.22 V	348	36.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	124.5 PK			1.50 H	29	91.5	33.0
2	*2467.00	112.8 AV			1.50 H	29	79.8	33.0
3	2483.50	67.3 PK	74.0	-6.7	1.50 H	29	34.4	32.9
4	2483.50	49.2 AV	54.0	-4.8	1.50 H	29	16.3	32.9
5	4934.00	53.7 PK	74.0	-20.3	1.35 H	52	48.4	5.3
6	4934.00	41.5 AV	54.0	-12.5	1.35 H	52	36.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	122.4 PK			1.03 V	354	89.4	33.0
2	*2467.00	110.9 AV			1.03 V	354	77.9	33.0
3	2483.50	65.2 PK	74.0	-8.8	1.03 V	354	32.3	32.9
4	2483.50	47.2 AV	54.0	-6.8	1.03 V	354	14.3	32.9
5	4934.00	54.4 PK	74.0	-19.6	1.24 V	339	49.1	5.3
6	4934.00	42.2 AV	54.0	-11.8	1.24 V	339	36.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	121.1 PK			1.37 H	23	88.1	33.0
2	*2472.00	109.5 AV			1.37 H	23	76.5	33.0
3	2483.50	72.5 PK	74.0	-1.5	1.37 H	23	39.6	32.9
4	2483.50	51.0 AV	54.0	-3.0	1.37 H	23	18.1	32.9
5	4944.00	53.7 PK	74.0	-20.3	1.34 H	58	48.3	5.4
6	4944.00	41.4 AV	54.0	-12.6	1.34 H	58	36.0	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	119.1 PK			1.09 V	354	86.1	33.0
2	*2472.00	107.6 AV			1.09 V	354	74.6	33.0
3	2483.50	71.5 PK	74.0	-2.5	1.09 V	354	38.6	32.9
4	2483.50	50.2 AV	54.0	-3.8	1.09 V	354	17.3	32.9
5	4944.00	54.3 PK	74.0	-19.7	1.25 V	338	48.9	5.4
6	4944.00	42.2 AV	54.0	-11.8	1.25 V	338	36.8	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	1.26 H	25	29.8	32.9
2	2390.00	47.6 AV	54.0	-6.4	1.26 H	25	14.7	32.9
3	*2412.00	121.8 PK			1.26 H	25	88.9	32.9
4	*2412.00	110.3 AV			1.26 H	25	77.4	32.9
5	4824.00	53.7 PK	74.0	-20.3	1.37 H	53	48.3	5.4
6	4824.00	41.5 AV	54.0	-12.5	1.37 H	53	36.1	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	1.01 V	350	28.2	32.9
2	2390.00	47.0 AV	54.0	-7.0	1.01 V	350	14.1	32.9
3	*2412.00	119.8 PK			1.01 V	350	86.9	32.9
4	*2412.00	108.4 AV			1.01 V	350	75.5	32.9
5	4824.00	54.3 PK	74.0	-19.7	1.23 V	341	48.9	5.4
6	4824.00	42.1 AV	54.0	-11.9	1.23 V	341	36.7	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	124.5 PK			1.46 H	22	91.6	32.9
2	*2437.00	112.1 AV			1.46 H	22	79.2	32.9
3	4874.00	53.7 PK	74.0	-20.3	1.42 H	55	48.4	5.3
4	4874.00	41.4 AV	54.0	-12.6	1.42 H	55	36.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.6 PK			1.07 V	355	88.7	32.9
2	*2437.00	110.2 AV			1.07 V	355	77.3	32.9
3	4874.00	54.4 PK	74.0	-19.6	1.19 V	343	49.1	5.3
4	4874.00	42.2 AV	54.0	-11.8	1.19 V	343	36.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.7 PK			1.40 H	22	87.8	32.9
2	*2462.00	109.2 AV			1.40 H	22	76.3	32.9
3	2483.50	63.3 PK	74.0	-10.7	1.40 H	22	30.4	32.9
4	2483.50	47.9 AV	54.0	-6.1	1.40 H	22	15.0	32.9
5	4924.00	53.6 PK	74.0	-20.4	1.36 H	51	48.3	5.3
6	4924.00	41.4 AV	54.0	-12.6	1.36 H	51	36.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.8 PK			1.00 V	349	85.9	32.9
2	*2462.00	107.2 AV			1.00 V	349	74.3	32.9
3	2483.50	60.8 PK	74.0	-13.2	1.00 V	349	27.9	32.9
4	2483.50	46.7 AV	54.0	-7.3	1.00 V	349	13.8	32.9
5	4924.00	54.1 PK	74.0	-19.9	1.24 V	347	48.8	5.3
6	4924.00	41.9 AV	54.0	-12.1	1.24 V	347	36.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	120.8 PK			1.39 H	23	87.8	33.0
2	*2467.00	109.3 AV			1.39 H	23	76.3	33.0
3	2483.50	63.5 PK	74.0	-10.5	1.39 H	23	30.6	32.9
4	2483.50	48.0 AV	54.0	-6.0	1.39 H	23	15.1	32.9
5	4934.00	53.6 PK	74.0	-20.4	1.39 H	55	48.3	5.3
6	4934.00	41.4 AV	54.0	-12.6	1.39 H	55	36.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.0 PK			1.04 V	354	86.0	33.0
2	*2467.00	107.4 AV			1.04 V	354	74.4	33.0
3	2483.50	61.6 PK	74.0	-12.4	1.04 V	354	28.7	32.9
4	2483.50	47.0 AV	54.0	-7.0	1.04 V	354	14.1	32.9
5	4934.00	54.2 PK	74.0	-19.8	1.28 V	335	48.9	5.3
6	4934.00	42.0 AV	54.0	-12.0	1.28 V	335	36.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	118.6 PK			1.40 H	25	85.6	33.0
2	*2472.00	107.0 AV			1.40 H	25	74.0	33.0
3	2483.50	71.3 PK	74.0	-2.7	1.40 H	25	38.4	32.9
4	2483.50	52.3 AV	54.0	-1.7	1.40 H	25	19.4	32.9
5	4944.00	53.6 PK	74.0	-20.4	1.33 H	48	48.2	5.4
6	4944.00	41.2 AV	54.0	-12.8	1.33 H	48	35.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.7 PK			1.07 V	355	83.7	33.0
2	*2472.00	105.1 AV			1.07 V	355	72.1	33.0
3	2483.50	69.6 PK	74.0	-4.4	1.07 V	355	36.7	32.9
4	2483.50	50.3 AV	54.0	-3.7	1.07 V	355	17.4	32.9
5	4944.00	54.2 PK	74.0	-19.8	1.21 V	349	48.8	5.4
6	4944.00	41.9 AV	54.0	-12.1	1.21 V	349	36.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.24 H	24	38.1	32.9
2	2390.00	48.9 AV	54.0	-5.1	1.24 H	24	16.0	32.9
3	*2412.00	120.0 PK			1.24 H	24	87.1	32.9
4	*2412.00	108.4 AV			1.24 H	24	75.5	32.9
5	4824.00	53.5 PK	74.0	-20.5	1.32 H	59	48.1	5.4
6	4824.00	41.2 AV	54.0	-12.8	1.32 H	59	35.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.00 V	353	36.8	32.9
2	2390.00	47.6 AV	54.0	-6.4	1.00 V	353	14.7	32.9
3	*2412.00	118.1 PK			1.00 V	353	85.2	32.9
4	*2412.00	106.5 AV			1.00 V	353	73.6	32.9
5	4824.00	54.1 PK	74.0	-19.9	1.23 V	336	48.7	5.4
6	4824.00	41.9 AV	54.0	-12.1	1.23 V	336	36.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.5 PK			1.23 H	21	88.6	32.9
2	*2437.00	109.9 AV			1.23 H	21	77.0	32.9
3	4874.00	53.5 PK	74.0	-20.5	1.29 H	58	48.2	5.3
4	4874.00	41.2 AV	54.0	-12.8	1.29 H	58	35.9	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.6 PK			1.03 V	351	86.7	32.9
2	*2437.00	108.0 AV			1.03 V	351	75.1	32.9
3	4874.00	54.2 PK	74.0	-19.8	1.21 V	358	48.9	5.3
4	4874.00	41.9 AV	54.0	-12.1	1.21 V	358	36.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.7 PK			1.21 H	22	84.8	32.9
2	*2462.00	106.2 AV			1.21 H	22	73.3	32.9
3	2483.50	63.1 PK	74.0	-10.9	1.21 H	22	30.2	32.9
4	2483.50	48.0 AV	54.0	-6.0	1.21 H	22	15.1	32.9
5	4924.00	53.4 PK	74.0	-20.6	1.32 H	50	48.1	5.3
6	4924.00	41.1 AV	54.0	-12.9	1.32 H	50	35.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.8 PK			1.06 V	353	82.9	32.9
2	*2462.00	104.3 AV			1.06 V	353	71.4	32.9
3	2483.50	61.6 PK	74.0	-12.4	1.06 V	353	28.7	32.9
4	2483.50	47.1 AV	54.0	-6.9	1.06 V	353	14.2	32.9
5	4924.00	53.9 PK	74.0	-20.1	1.27 V	339	48.6	5.3
6	4924.00	41.6 AV	54.0	-12.4	1.27 V	339	36.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.2 PK			1.26 H	23	85.2	33.0
2	*2467.00	106.6 AV			1.26 H	23	73.6	33.0
3	2483.50	72.2 PK	74.0	-1.8	1.26 H	23	39.3	32.9
4	2483.50	51.1 AV	54.0	-2.9	1.26 H	23	18.2	32.9
5	4934.00	53.4 PK	74.0	-20.6	1.43 H	49	48.1	5.3
6	4934.00	41.1 AV	54.0	-12.9	1.43 H	49	35.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.3 PK			1.06 V	359	83.3	33.0
2	*2467.00	104.7 AV			1.06 V	359	71.7	33.0
3	2483.50	70.7 PK	74.0	-3.3	1.06 V	359	37.8	32.9
4	2483.50	49.6 AV	54.0	-4.4	1.06 V	359	16.7	32.9
5	4934.00	54.1 PK	74.0	-19.9	1.23 V	338	48.8	5.3
6	4934.00	41.7 AV	54.0	-12.3	1.23 V	338	36.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.1 PK			1.18 H	25	83.1	33.0
2	*2472.00	104.6 AV			1.18 H	25	71.6	33.0
3	2483.50	71.2 PK	74.0	-2.8	1.18 H	25	38.3	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.18 H	25	19.6	32.9
5	4944.00	53.3 PK	74.0	-20.7	1.37 H	53	47.9	5.4
6	4944.00	41.2 AV	54.0	-12.8	1.37 H	53	35.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.3 PK			1.02 V	353	81.3	33.0
2	*2472.00	102.7 AV			1.02 V	353	69.7	33.0
3	2483.50	67.5 PK	74.0	-6.5	1.02 V	353	34.6	32.9
4	2483.50	51.5 AV	54.0	-2.5	1.02 V	353	18.6	32.9
5	4944.00	54.1 PK	74.0	-19.9	1.28 V	352	48.7	5.4
6	4944.00	41.7 AV	54.0	-12.3	1.28 V	352	36.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.21 H	26	30.4	32.9
2	2390.00	47.4 AV	54.0	-6.6	1.21 H	26	14.5	32.9
3	*2412.00	120.4 PK			1.21 H	26	87.5	32.9
4	*2412.00	108.6 AV			1.21 H	26	75.7	32.9
5	4824.00	53.6 PK	74.0	-20.4	1.31 H	55	48.2	5.4
6	4824.00	41.4 AV	54.0	-12.6	1.31 H	55	36.0	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.0 PK	74.0	-12.0	1.04 V	349	29.1	32.9
2	2390.00	47.2 AV	54.0	-6.8	1.04 V	349	14.3	32.9
3	*2412.00	118.4 PK			1.04 V	349	85.5	32.9
4	*2412.00	106.7 AV			1.04 V	349	73.8	32.9
5	4824.00	54.2 PK	74.0	-19.8	1.29 V	335	48.8	5.4
6	4824.00	41.9 AV	54.0	-12.1	1.29 V	335	36.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	124.7 PK			1.52 H	22	91.8	32.9
2	*2437.00	113.0 AV			1.52 H	22	80.1	32.9
3	4874.00	53.8 PK	74.0	-20.2	1.43 H	56	48.5	5.3
4	4874.00	41.5 AV	54.0	-12.5	1.43 H	56	36.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	122.7 PK			1.02 V	353	89.8	32.9
2	*2437.00	111.1 AV			1.02 V	353	78.2	32.9
3	4874.00	54.5 PK	74.0	-19.5	1.21 V	345	49.2	5.3
4	4874.00	42.2 AV	54.0	-11.8	1.21 V	345	36.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.5 PK			1.50 H	17	85.6	32.9
2	*2462.00	106.9 AV			1.50 H	17	74.0	32.9
3	2483.50	63.8 PK	74.0	-10.2	1.50 H	17	30.9	32.9
4	2483.50	47.5 AV	54.0	-6.5	1.50 H	17	14.6	32.9
5	4924.00	53.6 PK	74.0	-20.4	1.35 H	46	48.3	5.3
6	4924.00	41.4 AV	54.0	-12.6	1.35 H	46	36.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.5 PK			1.03 V	352	83.6	32.9
2	*2462.00	104.8 AV			1.03 V	352	71.9	32.9
3	2483.50	61.0 PK	74.0	-13.0	1.03 V	352	28.1	32.9
4	2483.50	46.7 AV	54.0	-7.3	1.03 V	352	13.8	32.9
5	4924.00	54.1 PK	74.0	-19.9	1.22 V	359	48.8	5.3
6	4924.00	41.9 AV	54.0	-12.1	1.22 V	359	36.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.6 PK			1.49 H	21	85.6	33.0
2	*2467.00	107.1 AV			1.49 H	21	74.1	33.0
3	2483.50	64.3 PK	74.0	-9.7	1.49 H	21	31.4	32.9
4	2483.50	48.1 AV	54.0	-5.9	1.49 H	21	15.2	32.9
5	4934.00	53.6 PK	74.0	-20.4	1.32 H	47	48.3	5.3
6	4934.00	41.2 AV	54.0	-12.8	1.32 H	47	35.9	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.7 PK			1.04 V	354	83.7	33.0
2	*2467.00	105.2 AV			1.04 V	354	72.2	33.0
3	2483.50	61.8 PK	74.0	-12.2	1.04 V	354	28.9	32.9
4	2483.50	47.4 AV	54.0	-6.6	1.04 V	354	14.5	32.9
5	4934.00	54.1 PK	74.0	-19.9	1.27 V	336	48.8	5.3
6	4934.00	41.7 AV	54.0	-12.3	1.27 V	336	36.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	118.5 PK			1.50 H	24	85.5	33.0
2	*2472.00	106.8 AV			1.50 H	24	73.8	33.0
3	2483.50	64.6 PK	74.0	-9.4	1.50 H	24	31.7	32.9
4	2483.50	52.0 AV	54.0	-2.0	1.50 H	24	19.1	32.9
5	4944.00	53.6 PK	74.0	-20.4	1.30 H	59	48.2	5.4
6	4944.00	41.2 AV	54.0	-12.8	1.30 H	59	35.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.4 PK			1.06 V	353	83.4	33.0
2	*2472.00	104.8 AV			1.06 V	353	71.8	33.0
3	2483.50	62.6 PK	74.0	-11.4	1.06 V	353	29.7	32.9
4	2483.50	50.1 AV	54.0	-3.9	1.06 V	353	17.2	32.9
5	4944.00	54.2 PK	74.0	-19.8	1.26 V	342	48.8	5.4
6	4944.00	41.9 AV	54.0	-12.1	1.26 V	342	36.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.4 PK	74.0	-8.6	1.24 H	24	32.5	32.9
2	2390.00	49.0 AV	54.0	-5.0	1.24 H	24	16.1	32.9
3	*2412.00	118.4 PK			1.24 H	24	85.5	32.9
4	*2412.00	106.8 AV			1.24 H	24	73.9	32.9
5	4824.00	53.4 PK	74.0	-20.6	1.29 H	54	48.0	5.4
6	4824.00	41.2 AV	54.0	-12.8	1.29 H	54	35.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	1.04 V	351	29.3	32.9
2	2390.00	48.5 AV	54.0	-5.5	1.04 V	351	15.6	32.9
3	*2412.00	116.3 PK			1.04 V	351	83.4	32.9
4	*2412.00	104.7 AV			1.04 V	351	71.8	32.9
5	4824.00	53.9 PK	74.0	-20.1	1.32 V	338	48.5	5.4
6	4824.00	41.7 AV	54.0	-12.3	1.32 V	338	36.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	122.4 PK			1.51 H	24	89.5	32.9
2	*2437.00	110.8 AV			1.51 H	24	77.9	32.9
3	4874.00	53.6 PK	74.0	-20.4	1.28 H	55	48.3	5.3
4	4874.00	41.3 AV	54.0	-12.7	1.28 H	55	36.0	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	120.3 PK			1.03 V	355	87.4	32.9
2	*2437.00	108.8 AV			1.03 V	355	75.9	32.9
3	4874.00	54.2 PK	74.0	-19.8	1.26 V	352	48.9	5.3
4	4874.00	42.0 AV	54.0	-12.0	1.26 V	352	36.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.6 PK			1.49 H	21	83.7	32.9
2	*2462.00	105.1 AV			1.49 H	21	72.2	32.9
3	2483.50	64.5 PK	74.0	-9.5	1.49 H	21	31.6	32.9
4	2483.50	48.5 AV	54.0	-5.5	1.49 H	21	15.6	32.9
5	4924.00	53.4 PK	74.0	-20.6	1.31 H	54	48.1	5.3
6	4924.00	41.1 AV	54.0	-12.9	1.31 H	54	35.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.7 PK			1.00 V	352	81.8	32.9
2	*2462.00	103.2 AV			1.00 V	352	70.3	32.9
3	2483.50	62.5 PK	74.0	-11.5	1.00 V	352	29.6	32.9
4	2483.50	47.7 AV	54.0	-6.3	1.00 V	352	14.8	32.9
5	4924.00	53.9 PK	74.0	-20.1	1.25 V	351	48.6	5.3
6	4924.00	41.6 AV	54.0	-12.4	1.25 V	351	36.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.5 PK			1.48 H	22	82.5	33.0
2	*2467.00	103.9 AV			1.48 H	22	70.9	33.0
3	2483.50	63.6 PK	74.0	-10.4	1.48 H	22	30.7	32.9
4	2483.50	49.9 AV	54.0	-4.1	1.48 H	22	17.0	32.9
5	4934.00	53.4 PK	74.0	-20.6	1.36 H	55	48.1	5.3
6	4934.00	41.1 AV	54.0	-12.9	1.36 H	55	35.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.5 PK			1.02 V	351	80.5	33.0
2	*2467.00	101.9 AV			1.02 V	351	68.9	33.0
3	2483.50	64.5 PK	74.0	-9.5	1.02 V	351	31.6	32.9
4	2483.50	48.4 AV	54.0	-5.6	1.02 V	351	15.5	32.9
5	4934.00	53.9 PK	74.0	-20.1	1.20 V	346	48.6	5.3
6	4934.00	41.6 AV	54.0	-12.4	1.20 V	346	36.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.3 PK			1.51 H	23	82.3	33.0
2	*2472.00	103.7 AV			1.51 H	23	70.7	33.0
3	2483.50	70.9 PK	74.0	-3.1	1.51 H	23	38.0	32.9
4	2483.50	52.3 AV	54.0	-1.7	1.51 H	23	19.4	32.9
5	4944.00	53.3 PK	74.0	-20.7	1.29 H	54	47.9	5.4
6	4944.00	41.2 AV	54.0	-12.8	1.29 H	54	35.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.3 PK			1.06 V	350	80.3	33.0
2	*2472.00	101.7 AV			1.06 V	350	68.7	33.0
3	2483.50	68.2 PK	74.0	-5.8	1.06 V	350	35.3	32.9
4	2483.50	51.5 AV	54.0	-2.5	1.06 V	350	18.6	32.9
5	4944.00	54.1 PK	74.0	-19.9	1.28 V	337	48.7	5.4
6	4944.00	41.7 AV	54.0	-12.3	1.28 V	337	36.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

1TX (Test Mode B - Monopole Antenna)

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.6 PK	74.0	-10.4	3.80 H	208	30.7	32.9
2	2390.00	49.2 AV	54.0	-4.8	3.80 H	208	16.3	32.9
3	*2412.00	109.8 PK			3.80 H	208	76.9	32.9
4	*2412.00	107.2 AV			3.80 H	208	74.3	32.9
5	4824.00	52.6 PK	74.0	-21.4	1.08 H	67	47.2	5.4
6	4824.00	40.3 AV	54.0	-13.7	1.08 H	67	34.9	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.00 V	16	32.6	32.9
2	2390.00	50.2 AV	54.0	-3.8	1.00 V	16	17.3	32.9
3	*2412.00	111.8 PK			1.00 V	16	78.9	32.9
4	*2412.00	109.2 AV			1.00 V	16	76.3	32.9
5	4824.00	53.8 PK	74.0	-20.2	1.06 V	327	48.4	5.4
6	4824.00	44.4 AV	54.0	-9.6	1.06 V	327	39.0	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.1 PK			3.89 H	209	77.2	32.9
2	*2437.00	107.5 AV			3.89 H	209	74.6	32.9
3	4874.00	52.4 PK	74.0	-21.6	1.01 H	65	47.1	5.3
4	4874.00	40.2 AV	54.0	-13.8	1.01 H	65	34.9	5.3
5	7311.00	59.0 PK	74.0	-15.0	1.03 H	71	48.2	10.8
6	7311.00	47.0 AV	54.0	-7.0	1.03 H	71	36.2	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.0 PK			1.02 V	14	79.1	32.9
2	*2437.00	109.4 AV			1.02 V	14	76.5	32.9
3	4874.00	53.9 PK	74.0	-20.1	1.02 V	325	48.6	5.3
4	4874.00	44.4 AV	54.0	-9.6	1.02 V	325	39.1	5.3
5	7311.00	59.5 PK	74.0	-14.5	1.05 V	356	48.7	10.8
6	7311.00	47.4 AV	54.0	-6.6	1.05 V	356	36.6	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.2 PK			3.89 H	210	75.3	32.9
2	*2462.00	105.6 AV			3.89 H	210	72.7	32.9
3	2483.50	62.3 PK	74.0	-11.7	3.89 H	210	29.4	32.9
4	2483.50	51.8 AV	54.0	-2.2	3.89 H	210	18.9	32.9
5	4924.00	52.4 PK	74.0	-21.6	1.15 H	62	47.1	5.3
6	4924.00	40.2 AV	54.0	-13.8	1.15 H	62	34.9	5.3
7	7386.00	58.9 PK	74.0	-15.1	1.10 H	72	47.9	11.0
8	7386.00	47.0 AV	54.0	-7.0	1.10 H	72	36.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.1 PK			1.01 V	13	77.2	32.9
2	*2462.00	107.5 AV			1.01 V	13	74.6	32.9
3	2483.50	63.2 PK	74.0	-10.8	1.01 V	13	30.3	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.01 V	13	19.5	32.9
5	4924.00	53.8 PK	74.0	-20.2	1.06 V	323	48.5	5.3
6	4924.00	44.5 AV	54.0	-9.5	1.06 V	323	39.2	5.3
7	7386.00	59.7 PK	74.0	-14.3	1.07 V	359	48.7	11.0
8	7386.00	47.5 AV	54.0	-6.5	1.07 V	359	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.3 PK			3.84 H	211	73.3	33.0
2	*2467.00	103.7 AV			3.84 H	211	70.7	33.0
3	2483.50	61.1 PK	74.0	-12.9	3.84 H	211	28.2	32.9
4	2483.50	48.2 AV	54.0	-5.8	3.84 H	211	15.3	32.9
5	4934.00	52.4 PK	74.0	-21.6	1.16 H	62	47.1	5.3
6	4934.00	40.1 AV	54.0	-13.9	1.16 H	62	34.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.1 PK			1.00 V	15	75.1	33.0
2	*2467.00	105.5 AV			1.00 V	15	72.5	33.0
3	2483.50	61.8 PK	74.0	-12.2	1.00 V	15	28.9	32.9
4	2483.50	48.8 AV	54.0	-5.2	1.00 V	15	15.9	32.9
5	4934.00	53.6 PK	74.0	-20.4	1.08 V	332	48.3	5.3
6	4934.00	43.9 AV	54.0	-10.1	1.08 V	332	38.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.1 PK			3.87 H	201	69.1	33.0
2	*2472.00	99.5 AV			3.87 H	201	66.5	33.0
3	2483.50	61.0 PK	74.0	-13.0	3.87 H	201	28.1	32.9
4	2483.50	49.1 AV	54.0	-4.9	3.87 H	201	16.2	32.9
5	4944.00	52.3 PK	74.0	-21.7	1.17 H	66	46.9	5.4
6	4944.00	40.2 AV	54.0	-13.8	1.17 H	66	34.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.0 PK			1.00 V	12	71.0	33.0
2	*2472.00	101.4 AV			1.00 V	12	68.4	33.0
3	2483.50	61.5 PK	74.0	-12.5	1.00 V	12	28.6	32.9
4	2483.50	49.9 AV	54.0	-4.1	1.00 V	12	17.0	32.9
5	4944.00	53.2 PK	74.0	-20.8	1.07 V	322	47.8	5.4
6	4944.00	43.7 AV	54.0	-10.3	1.07 V	322	38.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	3.83 H	206	33.0	32.9
2	2390.00	50.7 AV	54.0	-3.3	3.83 H	206	17.8	32.9
3	*2412.00	110.3 PK			3.83 H	206	77.4	32.9
4	*2412.00	100.7 AV			3.83 H	206	67.8	32.9
5	4824.00	51.0 PK	74.0	-23.0	1.12 H	66	45.6	5.4
6	4824.00	38.8 AV	54.0	-15.2	1.12 H	66	33.4	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.00 V	17	34.9	32.9
2	2390.00	51.3 AV	54.0	-2.7	1.00 V	17	18.4	32.9
3	*2412.00	112.1 PK			1.00 V	17	79.2	32.9
4	*2412.00	102.5 AV			1.00 V	17	69.6	32.9
5	4824.00	52.0 PK	74.0	-22.0	1.03 V	334	46.6	5.4
6	4824.00	39.7 AV	54.0	-14.3	1.03 V	334	34.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	3.83 H	204	31.2	32.9
2	2390.00	48.3 AV	54.0	-5.7	3.83 H	204	15.4	32.9
3	*2417.00	110.2 PK			3.83 H	204	77.3	32.9
4	*2417.00	100.7 AV			3.83 H	204	67.8	32.9
5	4834.00	51.1 PK	74.0	-22.9	1.16 H	62	45.7	5.4
6	4834.00	38.8 AV	54.0	-15.2	1.16 H	62	33.4	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.02 V	14	32.6	32.9
2	2390.00	49.2 AV	54.0	-4.8	1.02 V	14	16.3	32.9
3	*2417.00	112.0 PK			1.02 V	14	79.1	32.9
4	*2417.00	102.5 AV			1.02 V	14	69.6	32.9
5	4834.00	52.1 PK	74.0	-21.9	1.05 V	336	46.7	5.4
6	4834.00	39.9 AV	54.0	-14.1	1.05 V	336	34.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.6 PK			3.81 H	211	79.7	32.9
2	*2437.00	103.0 AV			3.81 H	211	70.1	32.9
3	4874.00	51.1 PK	74.0	-22.9	1.13 H	66	45.8	5.3
4	4874.00	38.9 AV	54.0	-15.1	1.13 H	66	33.6	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.3 PK			1.02 V	13	81.4	32.9
2	*2437.00	104.8 AV			1.02 V	13	71.9	32.9
3	4874.00	52.2 PK	74.0	-21.8	1.01 V	329	46.9	5.3
4	4874.00	39.9 AV	54.0	-14.1	1.01 V	329	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.2 PK			1.00 H	48	73.3	32.9
2	*2462.00	96.4 AV			1.00 H	48	63.5	32.9
3	2483.50	67.5 PK	74.0	-6.5	1.00 H	48	34.6	32.9
4	2483.50	50.2 AV	54.0	-3.8	1.00 H	48	17.3	32.9
5	4924.00	51.3 PK	74.0	-22.7	1.11 H	68	46.0	5.3
6	4924.00	38.6 AV	54.0	-15.4	1.11 H	68	33.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.1 PK			1.01 V	12	78.2	32.9
2	*2462.00	100.9 AV			1.01 V	12	68.0	32.9
3	2483.50	70.7 PK	74.0	-3.3	1.01 V	12	37.8	32.9
4	2483.50	52.2 AV	54.0	-1.8	1.01 V	12	19.3	32.9
5	4924.00	51.9 PK	74.0	-22.1	1.07 V	338	46.6	5.3
6	4924.00	38.5 AV	54.0	-15.5	1.07 V	338	33.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.0 PK			1.07 H	49	73.0	33.0
2	*2467.00	96.5 AV			1.07 H	49	63.5	33.0
3	2483.50	66.9 PK	74.0	-7.1	1.07 H	49	34.0	32.9
4	2483.50	50.4 AV	54.0	-3.6	1.07 H	49	17.5	32.9
5	4934.00	51.2 PK	74.0	-22.8	1.26 H	69	45.9	5.3
6	4934.00	38.6 AV	54.0	-15.4	1.26 H	69	33.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.6 PK			1.01 V	10	76.6	33.0
2	*2467.00	100.2 AV			1.01 V	10	67.2	33.0
3	2483.50	70.4 PK	74.0	-3.6	1.01 V	10	37.5	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.01 V	10	19.5	32.9
5	4934.00	51.8 PK	74.0	-22.2	1.06 V	328	46.5	5.3
6	4934.00	38.7 AV	54.0	-15.3	1.06 V	328	33.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.9 PK			1.13 H	45	69.9	33.0
2	*2472.00	94.2 AV			1.13 H	45	61.2	33.0
3	2483.50	66.8 PK	74.0	-7.2	1.13 H	45	33.9	32.9
4	2483.50	48.7 AV	54.0	-5.3	1.13 H	45	15.8	32.9
5	4944.00	51.3 PK	74.0	-22.7	1.15 H	67	45.9	5.4
6	4944.00	38.5 AV	54.0	-15.5	1.15 H	67	33.1	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.0 PK			1.02 V	9	74.0	33.0
2	*2472.00	97.4 AV			1.02 V	9	64.4	33.0
3	2483.50	69.9 PK	74.0	-4.1	1.02 V	9	37.0	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.02 V	9	17.8	32.9
5	4944.00	51.9 PK	74.0	-22.1	1.01 V	316	46.5	5.4
6	4944.00	38.8 AV	54.0	-15.2	1.01 V	316	33.4	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	3.96 H	218	28.2	32.9
2	2390.00	46.8 AV	54.0	-7.2	3.96 H	218	13.9	32.9
3	*2412.00	111.3 PK			3.96 H	218	78.4	32.9
4	*2412.00	99.5 AV			3.96 H	218	66.6	32.9
5	4824.00	51.1 PK	74.0	-22.9	1.17 H	67	45.7	5.4
6	4824.00	38.6 AV	54.0	-15.4	1.17 H	67	33.2	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.00 V	14	33.2	32.9
2	2390.00	52.2 AV	54.0	-1.8	1.00 V	14	19.3	32.9
3	*2412.00	113.1 PK			1.00 V	14	80.2	32.9
4	*2412.00	101.4 AV			1.00 V	14	68.5	32.9
5	4824.00	52.0 PK	74.0	-22.0	1.00 V	333	46.6	5.4
6	4824.00	39.7 AV	54.0	-14.3	1.00 V	333	34.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.1 PK			3.90 H	200	80.2	32.9
2	*2437.00	101.9 AV			3.90 H	200	69.0	32.9
3	4874.00	51.1 PK	74.0	-22.9	1.13 H	66	45.8	5.3
4	4874.00	38.9 AV	54.0	-15.1	1.13 H	66	33.6	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.0 PK			1.00 V	15	81.1	32.9
2	*2437.00	103.4 AV			1.00 V	15	70.5	32.9
3	4874.00	51.7 PK	74.0	-22.3	1.03 V	331	46.4	5.3
4	4874.00	39.9 AV	54.0	-14.1	1.03 V	331	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.5 PK			3.87 H	213	76.6	32.9
2	*2462.00	98.1 AV			3.87 H	213	65.2	32.9
3	2483.50	64.5 PK	74.0	-9.5	3.87 H	213	31.6	32.9
4	2483.50	50.0 AV	54.0	-4.0	3.87 H	213	17.1	32.9
5	4924.00	51.1 PK	74.0	-22.9	1.10 H	67	45.8	5.3
6	4924.00	38.5 AV	54.0	-15.5	1.10 H	67	33.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.4 PK			1.00 V	14	78.5	32.9
2	*2462.00	99.7 AV			1.00 V	14	66.8	32.9
3	2483.50	68.5 PK	74.0	-5.5	1.00 V	14	35.6	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.00 V	14	18.5	32.9
5	4924.00	51.6 PK	74.0	-22.4	1.06 V	333	46.3	5.3
6	4924.00	39.9 AV	54.0	-14.1	1.06 V	333	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.0 PK			3.78 H	213	77.0	33.0
2	*2467.00	98.4 AV			3.78 H	213	65.4	33.0
3	2483.50	68.9 PK	74.0	-5.1	3.78 H	213	36.0	32.9
4	2483.50	49.9 AV	54.0	-4.1	3.78 H	213	17.0	32.9
5	4934.00	51.1 PK	74.0	-22.9	1.20 H	67	45.8	5.3
6	4934.00	38.9 AV	54.0	-15.1	1.20 H	67	33.6	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.5 PK			1.02 V	14	78.5	33.0
2	*2467.00	99.7 AV			1.02 V	14	66.7	33.0
3	2483.50	71.3 PK	74.0	-2.7	1.02 V	14	38.4	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.02 V	14	18.5	32.9
5	4934.00	51.8 PK	74.0	-22.2	1.06 V	339	46.5	5.3
6	4934.00	39.9 AV	54.0	-14.1	1.06 V	339	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.3 PK			3.81 H	200	73.3	33.0
2	*2472.00	94.8 AV			3.81 H	200	61.8	33.0
3	2483.50	67.1 PK	74.0	-6.9	3.81 H	200	34.2	32.9
4	2483.50	48.8 AV	54.0	-5.2	3.81 H	200	15.9	32.9
5	4944.00	51.4 PK	74.0	-22.6	1.11 H	60	46.0	5.4
6	4944.00	39.1 AV	54.0	-14.9	1.11 H	60	33.7	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.5 PK			1.10 V	13	74.5	33.0
2	*2472.00	96.3 AV			1.10 V	13	63.3	33.0
3	2483.50	68.1 PK	74.0	-5.9	1.10 V	13	35.2	32.9
4	2483.50	49.0 AV	54.0	-5.0	1.10 V	13	16.1	32.9
5	4944.00	51.9 PK	74.0	-22.1	1.01 V	333	46.5	5.4
6	4944.00	40.0 AV	54.0	-14.0	1.01 V	333	34.6	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	4.00 H	210	27.4	32.9
2	2390.00	47.4 AV	54.0	-6.6	4.00 H	210	14.5	32.9
3	*2422.00	105.2 PK			4.00 H	210	72.3	32.9
4	*2422.00	93.9 AV			4.00 H	210	61.0	32.9
5	4844.00	51.4 PK	74.0	-22.6	1.11 H	67	46.0	5.4
6	4844.00	39.2 AV	54.0	-14.8	1.11 H	67	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	1.00 V	15	31.2	32.9
2	2390.00	50.9 AV	54.0	-3.1	1.00 V	15	18.0	32.9
3	*2422.00	108.1 PK			1.00 V	15	75.2	32.9
4	*2422.00	96.4 AV			1.00 V	15	63.5	32.9
5	4844.00	51.9 PK	74.0	-22.1	1.08 V	332	46.5	5.4
6	4844.00	39.6 AV	54.0	-14.4	1.08 V	332	34.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	4.00 H	213	32.2	32.9
2	2390.00	50.2 AV	54.0	-3.8	4.00 H	213	17.3	32.9
3	*2437.00	106.4 PK			4.00 H	213	73.5	32.9
4	*2437.00	95.4 AV			4.00 H	213	62.5	32.9
5	4874.00	51.2 PK	74.0	-22.8	1.09 H	333	45.9	5.3
6	4874.00	39.3 AV	54.0	-14.7	1.09 H	333	34.0	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	1.00 V	10	35.5	32.9
2	2390.00	52.5 AV	54.0	-1.5	1.00 V	10	19.6	32.9
3	*2437.00	108.8 PK			1.00 V	10	75.9	32.9
4	*2437.00	97.1 AV			1.00 V	10	64.2	32.9
5	4874.00	51.8 PK	74.0	-22.2	1.08 V	328	46.5	5.3
6	4874.00	39.9 AV	54.0	-14.1	1.08 V	328	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	106.9 PK			3.89 H	231	74.0	32.9
2	*2452.00	94.9 AV			3.89 H	231	62.0	32.9
3	2483.50	61.4 PK	74.0	-12.6	3.89 H	231	28.5	32.9
4	2483.50	48.4 AV	54.0	-5.6	3.89 H	231	15.5	32.9
5	4904.00	51.0 PK	74.0	-23.0	4.00 H	334	45.8	5.2
6	4904.00	39.5 AV	54.0	-14.5	4.00 H	334	34.3	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.7 PK			1.00 V	13	75.8	32.9
2	*2452.00	96.4 AV			1.00 V	13	63.5	32.9
3	2483.50	68.4 PK	74.0	-5.6	1.00 V	13	35.5	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.00 V	13	19.6	32.9
5	4904.00	51.7 PK	74.0	-22.3	1.00 V	322	46.5	5.2
6	4904.00	39.9 AV	54.0	-14.1	1.00 V	322	34.7	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.7 PK			3.82 H	211	73.8	32.9
2	*2457.00	94.7 AV			3.82 H	211	61.8	32.9
3	2483.50	64.7 PK	74.0	-9.3	3.82 H	211	31.8	32.9
4	2483.50	49.9 AV	54.0	-4.1	3.82 H	211	17.0	32.9
5	4914.00	51.1 PK	74.0	-22.9	1.15 H	67	45.9	5.2
6	4914.00	38.9 AV	54.0	-15.1	1.15 H	67	33.7	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.1 PK			1.02 V	12	75.2	32.9
2	*2457.00	96.1 AV			1.02 V	12	63.2	32.9
3	2483.50	67.9 PK	74.0	-6.1	1.02 V	12	35.0	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.02 V	12	19.6	32.9
5	4914.00	51.8 PK	74.0	-22.2	1.01 V	316	46.6	5.2
6	4914.00	39.5 AV	54.0	-14.5	1.01 V	316	34.3	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.5 PK			3.78 H	200	71.6	32.9
2	*2462.00	92.5 AV			3.78 H	200	59.6	32.9
3	2483.50	61.9 PK	74.0	-12.1	3.78 H	200	29.0	32.9
4	2483.50	47.9 AV	54.0	-6.1	3.78 H	200	15.0	32.9
5	4924.00	51.1 PK	74.0	-22.9	1.16 H	62	45.8	5.3
6	4924.00	38.7 AV	54.0	-15.3	1.16 H	62	33.4	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.4 PK			1.03 V	13	73.5	32.9
2	*2462.00	93.4 AV			1.03 V	13	60.5	32.9
3	2483.50	64.9 PK	74.0	-9.1	1.03 V	13	32.0	32.9
4	2483.50	48.4 AV	54.0	-5.6	1.03 V	13	15.5	32.9
5	4924.00	52.1 PK	74.0	-21.9	1.05 V	332	46.8	5.3
6	4924.00	39.9 AV	54.0	-14.1	1.05 V	332	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.7 PK	74.0	-11.3	1.05 H	7	29.8	32.9
2	2390.00	46.1 AV	54.0	-7.9	1.05 H	7	13.2	32.9
3	*2412.00	116.3 PK			1.05 H	7	83.4	32.9
4	*2412.00	104.6 AV			1.05 H	7	71.7	32.9
5	4824.00	52.5 PK	74.0	-21.5	2.76 H	208	47.1	5.4
6	4824.00	39.3 AV	54.0	-14.7	2.76 H	208	33.9	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.7 PK	74.0	-8.3	1.81 V	170	32.8	32.9
2	2390.00	46.7 AV	54.0	-7.3	1.81 V	170	13.8	32.9
3	*2412.00	119.1 PK			1.81 V	170	86.2	32.9
4	*2412.00	107.2 AV			1.81 V	170	74.3	32.9
5	4824.00	53.8 PK	74.0	-20.2	3.06 V	162	48.4	5.4
6	4824.00	40.7 AV	54.0	-13.3	3.06 V	162	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.3 PK			1.02 H	6	88.4	32.9
2	*2437.00	110.1 AV			1.02 H	6	77.2	32.9
3	4874.00	52.7 PK	74.0	-21.3	2.78 H	205	47.4	5.3
4	4874.00	39.5 AV	54.0	-14.5	2.78 H	205	34.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	123.2 PK			1.57 V	171	90.3	32.9
2	*2437.00	112.3 AV			1.57 V	171	79.4	32.9
3	4874.00	54.4 PK	74.0	-19.6	3.04 V	169	49.1	5.3
4	4874.00	41.1 AV	54.0	-12.9	3.04 V	169	35.8	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.5 PK			1.03 H	11	82.6	32.9
2	*2462.00	104.3 AV			1.03 H	11	71.4	32.9
3	2483.50	66.5 PK	74.0	-7.5	1.03 H	11	33.6	32.9
4	2483.50	47.0 AV	54.0	-7.0	1.03 H	11	14.1	32.9
5	4924.00	52.6 PK	74.0	-21.4	2.80 H	204	47.3	5.3
6	4924.00	39.5 AV	54.0	-14.5	2.80 H	204	34.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.8 PK			1.52 V	163	84.9	32.9
2	*2462.00	106.7 AV			1.52 V	163	73.8	32.9
3	2483.50	67.6 PK	74.0	-6.4	1.52 V	163	34.7	32.9
4	2483.50	47.3 AV	54.0	-6.7	1.52 V	163	14.4	32.9
5	4924.00	53.8 PK	74.0	-20.2	3.07 V	172	48.5	5.3
6	4924.00	40.6 AV	54.0	-13.4	3.07 V	172	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.3 PK			1.01 H	1	82.3	33.0
2	*2467.00	104.2 AV			1.01 H	1	71.2	33.0
3	2483.50	66.8 PK	74.0	-7.2	1.01 H	1	33.9	32.9
4	2483.50	47.5 AV	54.0	-6.5	1.01 H	1	14.6	32.9
5	4934.00	52.6 PK	74.0	-21.4	2.82 H	210	47.3	5.3
6	4934.00	39.5 AV	54.0	-14.5	2.82 H	210	34.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.6 PK			1.53 V	164	84.6	33.0
2	*2467.00	106.4 AV			1.53 V	164	73.4	33.0
3	2483.50	67.2 PK	74.0	-6.8	1.53 V	164	34.3	32.9
4	2483.50	47.7 AV	54.0	-6.3	1.53 V	164	14.8	32.9
5	4934.00	53.7 PK	74.0	-20.3	3.01 V	173	48.4	5.3
6	4934.00	40.6 AV	54.0	-13.4	3.01 V	173	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.5 PK			1.01 H	2	80.5	33.0
2	*2472.00	102.2 AV			1.01 H	2	69.2	33.0
3	2483.50	68.5 PK	74.0	-5.5	1.01 H	2	35.6	32.9
4	2483.50	49.6 AV	54.0	-4.4	1.01 H	2	16.7	32.9
5	4944.00	52.3 PK	74.0	-21.7	2.86 H	218	46.9	5.4
6	4944.00	39.2 AV	54.0	-14.8	2.86 H	218	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.7 PK			1.50 V	172	82.7	33.0
2	*2472.00	104.6 AV			1.50 V	172	71.6	33.0
3	2483.50	70.6 PK	74.0	-3.4	1.50 V	172	37.7	32.9
4	2483.50	50.5 AV	54.0	-3.5	1.50 V	172	17.6	32.9
5	4944.00	53.8 PK	74.0	-20.2	3.08 V	157	48.4	5.4
6	4944.00	40.7 AV	54.0	-13.3	3.08 V	157	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	1.07 H	4	28.7	32.9
2	2390.00	46.0 AV	54.0	-8.0	1.07 H	4	13.1	32.9
3	*2412.00	112.1 PK			1.07 H	4	79.2	32.9
4	*2412.00	100.5 AV			1.07 H	4	67.6	32.9
5	4824.00	52.4 PK	74.0	-21.6	2.79 H	203	47.0	5.4
6	4824.00	39.2 AV	54.0	-14.8	2.79 H	203	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.80 V	173	30.4	32.9
2	2390.00	46.4 AV	54.0	-7.6	1.80 V	173	13.5	32.9
3	*2412.00	114.7 PK			1.80 V	173	81.8	32.9
4	*2412.00	103.0 AV			1.80 V	173	70.1	32.9
5	4824.00	53.7 PK	74.0	-20.3	3.03 V	161	48.3	5.4
6	4824.00	40.7 AV	54.0	-13.3	3.03 V	161	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.5 PK			1.03 H	9	83.6	32.9
2	*2437.00	105.1 AV			1.03 H	9	72.2	32.9
3	4874.00	54.2 PK	74.0	-19.8	3.01 H	167	48.9	5.3
4	4874.00	41.0 AV	54.0	-13.0	3.01 H	167	35.7	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	119.0 PK			1.59 V	173	86.1	32.9
2	*2437.00	107.6 AV			1.59 V	173	74.7	32.9
3	4874.00	54.2 PK	74.0	-19.8	3.01 V	167	48.9	5.3
4	4874.00	41.0 AV	54.0	-13.0	3.01 V	167	35.7	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.1 PK			1.05 H	4	80.2	32.9
2	*2462.00	101.7 AV			1.05 H	4	68.8	32.9
3	2483.50	67.7 PK	74.0	-6.3	1.05 H	4	34.8	32.9
4	2483.50	47.0 AV	54.0	-7.0	1.05 H	4	14.1	32.9
5	4924.00	52.6 PK	74.0	-21.4	2.79 H	206	47.3	5.3
6	4924.00	39.4 AV	54.0	-14.6	2.79 H	206	34.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.6 PK			1.55 V	164	82.7	32.9
2	*2462.00	104.3 AV			1.55 V	164	71.4	32.9
3	2483.50	68.8 PK	74.0	-5.2	1.55 V	164	35.9	32.9
4	2483.50	47.4 AV	54.0	-6.6	1.55 V	164	14.5	32.9
5	4924.00	53.7 PK	74.0	-20.3	3.00 V	167	48.4	5.3
6	4924.00	40.6 AV	54.0	-13.4	3.00 V	167	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.4 PK			1.01 H	3	79.4	33.0
2	*2467.00	101.1 AV			1.01 H	3	68.1	33.0
3	2483.50	67.6 PK	74.0	-6.4	1.03 H	3	34.7	32.9
4	2483.50	47.2 AV	54.0	-6.8	1.03 H	3	14.3	32.9
5	4934.00	52.2 PK	74.0	-21.8	2.77 H	203	46.9	5.3
6	4934.00	39.1 AV	54.0	-14.9	2.77 H	203	33.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.8 PK			1.56 V	164	81.8	33.0
2	*2467.00	103.6 AV			1.56 V	164	70.6	33.0
3	2483.50	68.2 PK	74.0	-5.8	1.56 V	164	35.3	32.9
4	2483.50	47.6 AV	54.0	-6.4	1.56 V	164	14.7	32.9
5	4934.00	53.6 PK	74.0	-20.4	2.97 V	169	48.3	5.3
6	4934.00	40.5 AV	54.0	-13.5	2.97 V	169	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.6 PK			1.02 H	10	77.6	33.0
2	*2472.00	99.1 AV			1.02 H	10	66.1	33.0
3	2483.50	69.1 PK	74.0	-4.9	1.02 H	10	36.2	32.9
4	2483.50	49.7 AV	54.0	-4.3	1.02 H	10	16.8	32.9
5	4944.00	52.2 PK	74.0	-21.8	2.84 H	203	46.8	5.4
6	4944.00	39.2 AV	54.0	-14.8	2.84 H	203	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.1 PK			1.51 V	165	80.1	33.0
2	*2472.00	101.5 AV			1.51 V	165	68.5	33.0
3	2483.50	71.8 PK	74.0	-2.2	1.51 V	165	38.9	32.9
4	2483.50	50.8 AV	54.0	-3.2	1.51 V	165	17.9	32.9
5	4944.00	53.7 PK	74.0	-20.3	3.13 V	172	48.3	5.4
6	4944.00	40.6 AV	54.0	-13.4	3.13 V	172	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.03 H	9	27.6	32.9
2	2390.00	46.3 AV	54.0	-7.7	1.03 H	9	13.4	32.9
3	*2412.00	110.5 PK			1.03 H	9	77.6	32.9
4	*2412.00	98.6 AV			1.03 H	9	65.7	32.9
5	4824.00	52.3 PK	74.0	-21.7	2.81 H	209	46.9	5.4
6	4824.00	39.1 AV	54.0	-14.9	2.81 H	209	33.7	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.81 V	172	33.1	32.9
2	2390.00	47.2 AV	54.0	-6.8	1.81 V	172	14.3	32.9
3	*2412.00	113.6 PK			1.81 V	172	80.7	32.9
4	*2412.00	101.2 AV			1.81 V	172	68.3	32.9
5	4824.00	53.5 PK	74.0	-20.5	2.98 V	158	48.1	5.4
6	4824.00	40.3 AV	54.0	-13.7	2.98 V	158	34.9	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.05 H	8	38.3	32.9
2	2390.00	46.6 AV	54.0	-7.4	1.05 H	8	13.7	32.9
3	*2437.00	114.6 PK			1.05 H	8	81.7	32.9
4	*2437.00	103.2 AV			1.05 H	8	70.3	32.9
5	4874.00	52.2 PK	74.0	-21.8	2.81 H	212	46.9	5.3
6	4874.00	39.1 AV	54.0	-14.9	2.81 H	212	33.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.5 PK	74.0	-1.5	1.57 V	171	39.6	32.9
2	2390.00	47.1 AV	54.0	-6.9	1.57 V	171	14.2	32.9
3	*2437.00	117.1 PK			1.56 V	172	84.2	32.9
4	*2437.00	105.6 AV			1.56 V	172	72.7	32.9
5	4874.00	53.8 PK	74.0	-20.2	3.09 V	162	48.5	5.3
6	4874.00	40.6 AV	54.0	-13.4	3.09 V	162	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.7 PK			1.09 H	6	76.8	32.9
2	*2462.00	98.5 AV			1.09 H	6	65.6	32.9
3	2483.50	68.7 PK	74.0	-5.3	1.09 H	6	35.8	32.9
4	2483.50	47.1 AV	54.0	-6.9	1.09 H	6	14.2	32.9
5	#25000.00	60.1 PK			2.83 H	201	47.1	13.0
6	#25000.00	47.0 AV			2.83 H	201	34.0	13.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.3 PK			1.51 V	162	79.4	32.9
2	*2462.00	101.0 AV			1.51 V	162	68.1	32.9
3	2483.50	69.8 PK	74.0	-4.2	1.51 V	162	36.9	32.9
4	2483.50	47.3 AV	54.0	-6.7	1.51 V	162	14.4	32.9
5	4924.00	53.6 PK	74.0	-20.4	3.08 V	162	48.3	5.3
6	4924.00	40.5 AV	54.0	-13.5	3.08 V	162	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.5 PK			1.04 H	9	74.7	32.8
2	*2467.00	96.4 AV			1.04 H	9	63.6	32.8
3	2483.50	66.6 PK	74.0	-7.4	1.04 H	9	33.8	32.8
4	2483.50	47.5 AV	54.0	-6.5	1.04 H	9	14.7	32.8
5	4934.00	51.9 PK	74.0	-22.1	2.74 H	201	46.8	5.1
6	4934.00	38.8 AV	54.0	-15.2	2.74 H	201	33.7	5.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.4 PK			1.50 V	164	77.4	33.0
2	*2467.00	99.1 AV			1.50 V	164	66.1	33.0
3	2483.50	67.5 PK	74.0	-6.5	1.50 V	164	34.6	32.9
4	2483.50	48.1 AV	54.0	-5.9	1.50 V	164	15.2	32.9
5	4934.00	53.6 PK	74.0	-20.4	2.96 V	164	48.3	5.3
6	4934.00	40.5 AV	54.0	-13.5	2.96 V	164	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.6 PK			1.02 H	2	74.6	33.0
2	*2472.00	96.3 AV			1.02 H	2	63.3	33.0
3	2483.50	65.0 PK	74.0	-9.0	1.02 H	2	32.1	32.9
4	2483.50	49.6 AV	54.0	-4.4	1.02 H	2	16.7	32.9
5	4944.00	52.2 PK	74.0	-21.8	2.81 H	206	46.8	5.4
6	4944.00	39.2 AV	54.0	-14.8	2.81 H	206	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.9 PK			1.53 V	164	76.9	33.0
2	*2472.00	98.7 AV			1.53 V	164	65.7	33.0
3	2483.50	66.8 PK	74.0	-7.2	1.53 V	164	33.9	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.53 V	164	17.8	32.9
5	4944.00	53.7 PK	74.0	-20.3	3.01 V	166	48.3	5.4
6	4944.00	40.6 AV	54.0	-13.4	3.01 V	166	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.6 PK	74.0	-9.4	1.04 H	6	31.7	32.9
2	2390.00	46.3 AV	54.0	-7.7	1.04 H	6	13.4	32.9
3	*2412.00	112.5 PK			1.04 H	6	79.6	32.9
4	*2412.00	101.2 AV			1.04 H	6	68.3	32.9
5	4824.00	52.6 PK	74.0	-21.4	2.74 H	203	47.2	5.4
6	4824.00	39.3 AV	54.0	-14.7	2.74 H	203	33.9	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.50 V	161	34.7	32.9
2	2390.00	47.1 AV	54.0	-6.9	1.50 V	161	14.2	32.9
3	*2412.00	115.5 PK			1.50 V	161	82.6	32.9
4	*2412.00	103.8 AV			1.50 V	161	70.9	32.9
5	4824.00	54.0 PK	74.0	-20.0	3.12 V	174	48.6	5.4
6	4824.00	40.7 AV	54.0	-13.3	3.12 V	174	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.2 PK			1.04 H	8	82.3	32.9
2	*2437.00	103.7 AV			1.04 H	8	70.8	32.9
3	4874.00	52.6 PK	74.0	-21.4	2.79 H	206	47.3	5.3
4	4874.00	39.4 AV	54.0	-14.6	2.79 H	206	34.1	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	118.0 PK			1.00 V	17	85.1	32.9
2	*2437.00	106.5 AV			1.00 V	17	73.6	32.9
3	4874.00	53.9 PK	74.0	-20.1	3.08 V	170	48.6	5.3
4	4874.00	40.7 AV	54.0	-13.3	3.08 V	170	35.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			1.08 H	358	78.7	32.9
2	*2462.00	100.1 AV			1.08 H	358	67.2	32.9
3	2483.50	61.1 PK	74.0	-12.9	1.08 H	358	28.2	32.9
4	2483.50	47.0 AV	54.0	-7.0	1.08 H	358	14.1	32.9
5	4924.00	52.6 PK	74.0	-21.4	2.83 H	217	47.3	5.3
6	4924.00	39.2 AV	54.0	-14.8	2.83 H	217	33.9	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.5 PK			1.00 V	12	81.6	32.9
2	*2462.00	102.8 AV			1.00 V	12	69.9	32.9
3	2483.50	62.4 PK	74.0	-11.6	1.00 V	12	29.5	32.9
4	2483.50	47.5 AV	54.0	-6.5	1.00 V	12	14.6	32.9
5	4924.00	53.7 PK	74.0	-20.3	3.06 V	167	48.4	5.3
6	4924.00	40.6 AV	54.0	-13.4	3.06 V	167	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#2462.00	110.2 PK			1.04 H	9	77.3	32.9
2	#2462.00	98.5 AV			1.04 H	9	65.6	32.9
3	2483.50	60.5 PK	74.0	-13.5	1.04 H	9	27.6	32.9
4	2483.50	47.0 AV	54.0	-7.0	1.04 H	9	14.1	32.9
5	4934.00	52.2 PK	74.0	-21.8	2.84 H	201	46.9	5.3
6	4934.00	39.1 AV	54.0	-14.9	2.84 H	201	33.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.9 PK			1.00 V	12	79.9	33.0
2	*2467.00	101.2 AV			1.00 V	12	68.2	33.0
3	2483.50	62.4 PK	74.0	-11.6	1.00 V	12	29.5	32.9
4	2483.50	47.5 AV	54.0	-6.5	1.00 V	12	14.6	32.9
5	4934.00	53.6 PK	74.0	-20.4	3.03 V	172	48.3	5.3
6	4934.00	40.4 AV	54.0	-13.6	3.03 V	172	35.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band, the limit was restricted at the Conducted Out of Band Emissions.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.4 PK			1.07 H	8	76.4	33.0
2	*2472.00	97.7 AV			1.07 H	8	64.7	33.0
3	2483.50	61.3 PK	74.0	-12.7	1.07 H	8	28.4	32.9
4	2483.50	47.6 AV	54.0	-6.4	1.07 H	8	14.7	32.9
5	4944.00	52.4 PK	74.0	-21.6	2.81 H	206	47.0	5.4
6	4944.00	39.2 AV	54.0	-14.8	2.81 H	206	33.8	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.8 PK			1.00 V	15	78.8	33.0
2	*2472.00	100.3 AV			1.00 V	15	67.3	33.0
3	2483.50	62.5 PK	74.0	-11.5	1.00 V	15	29.6	32.9
4	2483.50	48.8 AV	54.0	-5.2	1.00 V	15	15.9	32.9
5	4944.00	53.7 PK	74.0	-20.3	3.03 V	165	48.3	5.4
6	4944.00	40.6 AV	54.0	-13.4	3.03 V	165	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.06 H	3	32.6	32.9
2	2390.00	46.7 AV	54.0	-7.3	1.06 H	3	13.8	32.9
3	*2412.00	109.1 PK			1.06 H	3	76.2	32.9
4	*2412.00	97.4 AV			1.06 H	3	64.5	32.9
5	4824.00	52.3 PK	74.0	-21.7	2.76 H	202	46.9	5.4
6	4824.00	39.1 AV	54.0	-14.9	2.76 H	202	33.7	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.50 V	161	34.2	32.9
2	2390.00	47.4 AV	54.0	-6.6	1.50 V	161	14.5	32.9
3	*2412.00	112.2 PK			1.50 V	161	79.3	32.9
4	*2412.00	100.0 AV			1.50 V	161	67.1	32.9
5	4824.00	53.8 PK	74.0	-20.2	3.07 V	165	48.4	5.4
6	4824.00	40.6 AV	54.0	-13.4	3.07 V	165	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.06 H	6	38.5	32.9
2	2390.00	47.5 AV	54.0	-6.5	1.06 H	6	14.6	32.9
3	*2437.00	114.2 PK			1.06 H	6	81.3	32.9
4	*2437.00	102.6 AV			1.06 H	6	69.7	32.9
5	4874.00	52.4 PK	74.0	-21.6	2.87 H	201	47.1	5.3
6	4874.00	39.1 AV	54.0	-14.9	2.87 H	201	33.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.00 V	18	39.4	32.9
2	2390.00	48.2 AV	54.0	-5.8	1.00 V	18	15.3	32.9
3	*2437.00	116.7 PK			1.00 V	18	83.8	32.9
4	*2437.00	105.3 AV			1.00 V	18	72.4	32.9
5	4874.00	53.7 PK	74.0	-20.3	3.13 V	172	48.4	5.3
6	4874.00	40.4 AV	54.0	-13.6	3.13 V	172	35.1	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.6 PK			1.04 H	2	78.7	32.9
2	*2462.00	100.0 AV			1.04 H	2	67.1	32.9
3	2483.50	70.5 PK	74.0	-3.5	1.04 H	2	37.6	32.9
4	2483.50	49.7 AV	54.0	-4.3	1.04 H	2	16.8	32.9
5	4924.00	52.3 PK	74.0	-21.7	2.79 H	211	47.0	5.3
6	4924.00	39.1 AV	54.0	-14.9	2.79 H	211	33.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.1 PK			1.00 V	14	81.2	32.9
2	*2462.00	102.4 AV			1.00 V	14	69.5	32.9
3	2483.50	72.3 PK	74.0	-1.7	1.00 V	14	39.4	32.9
4	2483.50	51.0 AV	54.0	-3.0	1.00 V	14	18.1	32.9
5	4924.00	53.6 PK	74.0	-20.4	3.01 V	166	48.3	5.3
6	4924.00	40.5 AV	54.0	-13.5	3.01 V	166	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.8 PK			1.02 H	6	76.8	33.0
2	*2467.00	98.3 AV			1.02 H	6	65.3	33.0
3	2483.50	70.4 PK	74.0	-3.6	1.02 H	6	37.5	32.9
4	2483.50	49.3 AV	54.0	-4.7	1.02 H	6	16.4	32.9
5	4934.00	52.1 PK	74.0	-21.9	2.84 H	219	46.8	5.3
6	4934.00	39.1 AV	54.0	-14.9	2.84 H	219	33.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.3 PK			1.00 V	12	79.3	33.0
2	*2467.00	100.9 AV			1.00 V	12	67.9	33.0
3	2483.50	72.5 PK	74.0	-1.5	1.00 V	12	39.6	32.9
4	2483.50	50.2 AV	54.0	-3.8	1.00 V	12	17.3	32.9
5	4934.00	53.4 PK	74.0	-20.6	3.12 V	178	48.1	5.3
6	4934.00	40.2 AV	54.0	-13.8	3.12 V	178	34.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.4 PK			1.06 H	2	74.4	33.0
2	*2472.00	96.7 AV			1.06 H	2	63.7	33.0
3	2483.50	66.4 PK	74.0	-7.6	1.06 H	2	33.5	32.9
4	2483.50	49.5 AV	54.0	-4.5	1.06 H	2	16.6	32.9
5	4944.00	52.2 PK	74.0	-21.8	2.74 H	207	46.8	5.4
6	4944.00	39.1 AV	54.0	-14.9	2.74 H	207	33.7	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.9 PK			1.00 V	14	77.9	33.0
2	*2472.00	99.3 AV			1.00 V	14	66.3	33.0
3	2483.50	68.7 PK	74.0	-5.3	1.00 V	14	35.8	32.9
4	2483.50	50.7 AV	54.0	-3.3	1.00 V	14	17.8	32.9
5	4944.00	53.7 PK	74.0	-20.3	3.01 V	168	48.3	5.4
6	4944.00	40.6 AV	54.0	-13.4	3.01 V	168	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

2TX (Test Mode B - Monopole Antenna)

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	3.83 H	174	29.6	32.9
2	2390.00	49.4 AV	54.0	-4.6	3.83 H	174	16.5	32.9
3	*2412.00	111.3 PK			3.83 H	174	78.4	32.9
4	*2412.00	108.6 AV			3.83 H	174	75.7	32.9
5	4824.00	52.0 PK	74.0	-22.0	2.73 H	24	46.6	5.4
6	4824.00	41.7 AV	54.0	-12.3	2.73 H	24	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.44 V	162	30.6	32.9
2	2390.00	51.2 AV	54.0	-2.8	1.44 V	162	18.3	32.9
3	*2412.00	112.7 PK			1.44 V	162	79.8	32.9
4	*2412.00	110.1 AV			1.44 V	162	77.2	32.9
5	4824.00	53.0 PK	74.0	-21.0	2.53 V	308	47.6	5.4
6	4824.00	43.9 AV	54.0	-10.1	2.53 V	308	38.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.0 PK			3.87 H	178	79.1	32.9
2	*2437.00	109.3 AV			3.87 H	178	76.4	32.9
3	4874.00	52.1 PK	74.0	-21.9	2.68 H	20	46.8	5.3
4	4874.00	41.7 AV	54.0	-12.3	2.68 H	20	36.4	5.3
5	7311.00	59.5 PK	74.0	-14.5	2.72 H	224	48.7	10.8
6	7311.00	50.3 AV	54.0	-3.7	2.72 H	224	39.5	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.4 PK			1.46 V	177	80.5	32.9
2	*2437.00	110.8 AV			1.46 V	177	77.9	32.9
3	4874.00	53.1 PK	74.0	-20.9	2.46 V	307	47.8	5.3
4	4874.00	44.0 AV	54.0	-10.0	2.46 V	307	38.7	5.3
5	7311.00	57.6 PK	74.0	-16.4	2.95 V	354	46.8	10.8
6	7311.00	46.9 AV	54.0	-7.1	2.95 V	354	36.1	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.9 PK			3.89 H	176	78.0	32.9
2	*2462.00	108.3 AV			3.89 H	176	75.4	32.9
3	2483.50	62.2 PK	74.0	-11.8	3.89 H	176	29.3	32.9
4	2483.50	51.6 AV	54.0	-2.4	3.89 H	176	18.7	32.9
5	4924.00	51.8 PK	74.0	-22.2	2.73 H	19	46.5	5.3
6	4924.00	41.6 AV	54.0	-12.4	2.73 H	19	36.3	5.3
7	7386.00	59.5 PK	74.0	-14.5	2.77 H	229	48.5	11.0
8	7386.00	50.3 AV	54.0	-3.7	2.77 H	229	39.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.8 PK			1.35 V	164	79.9	32.9
2	*2462.00	110.2 AV			1.35 V	164	77.3	32.9
3	2483.50	63.0 PK	74.0	-11.0	1.35 V	164	30.1	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.35 V	164	19.5	32.9
5	4924.00	52.7 PK	74.0	-21.3	2.42 V	305	47.4	5.3
6	4924.00	43.6 AV	54.0	-10.4	2.42 V	305	38.3	5.3
7	7386.00	57.5 PK	74.0	-16.5	2.90 V	357	46.5	11.0
8	7386.00	46.8 AV	54.0	-7.2	2.90 V	357	35.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.2 PK			3.86 H	174	74.2	33.0
2	*2467.00	104.6 AV			3.86 H	174	71.6	33.0
3	2483.50	61.9 PK	74.0	-12.1	3.86 H	174	29.0	32.9
4	2483.50	50.6 AV	54.0	-3.4	3.86 H	174	17.7	32.9
5	4934.00	51.8 PK	74.0	-22.2	2.63 H	21	46.5	5.3
6	4934.00	41.5 AV	54.0	-12.5	2.63 H	21	36.2	5.3
7	7401.00	59.3 PK	74.0	-14.7	2.78 H	226	48.3	11.0
8	7401.00	50.2 AV	54.0	-3.8	2.78 H	226	39.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.9 PK			1.22 V	165	75.9	33.0
2	*2467.00	106.3 AV			1.22 V	165	73.3	33.0
3	2483.50	62.6 PK	74.0	-11.4	1.22 V	165	29.7	32.9
4	2483.50	51.3 AV	54.0	-2.7	1.22 V	165	18.4	32.9
5	4934.00	52.6 PK	74.0	-21.4	2.44 V	303	47.3	5.3
6	4934.00	43.6 AV	54.0	-10.4	2.44 V	303	38.3	5.3
7	7401.00	57.4 PK	74.0	-16.6	2.97 V	348	46.4	11.0
8	7401.00	46.7 AV	54.0	-7.3	2.97 V	348	35.7	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.4 PK			3.81 H	179	70.4	33.0
2	*2472.00	100.8 AV			3.81 H	179	67.8	33.0
3	2483.50	61.2 PK	74.0	-12.8	3.81 H	179	28.3	32.9
4	2483.50	49.4 AV	54.0	-4.6	3.81 H	179	16.5	32.9
5	4944.00	51.7 PK	74.0	-22.3	2.66 H	23	46.3	5.4
6	4944.00	41.2 AV	54.0	-12.8	2.66 H	23	35.8	5.4
7	7416.00	59.4 PK	74.0	-14.6	2.74 H	226	48.3	11.1
8	7416.00	50.2 AV	54.0	-3.8	2.74 H	226	39.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.3 PK			1.16 V	164	72.3	33.0
2	*2472.00	102.6 AV			1.16 V	164	69.6	33.0
3	2483.50	61.4 PK	74.0	-12.6	1.16 V	164	28.5	32.9
4	2483.50	50.5 AV	54.0	-3.5	1.16 V	164	17.6	32.9
5	4944.00	52.7 PK	74.0	-21.3	2.40 V	301	47.3	5.4
6	4944.00	43.6 AV	54.0	-10.4	2.40 V	301	38.2	5.4
7	7416.00	57.4 PK	74.0	-16.6	2.98 V	352	46.3	11.1
8	7416.00	46.6 AV	54.0	-7.4	2.98 V	352	35.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	3.85 H	173	34.0	32.9
2	2390.00	50.0 AV	54.0	-4.0	3.85 H	173	17.1	32.9
3	*2412.00	112.3 PK			3.85 H	173	79.4	32.9
4	*2412.00	102.2 AV			3.85 H	173	69.3	32.9
5	4824.00	51.2 PK	74.0	-22.8	2.72 H	25	45.8	5.4
6	4824.00	39.0 AV	54.0	-15.0	2.72 H	25	33.6	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.43 V	165	35.4	32.9
2	2390.00	51.2 AV	54.0	-2.8	1.43 V	165	18.3	32.9
3	*2412.00	114.1 PK			1.43 V	165	81.2	32.9
4	*2412.00	103.9 AV			1.43 V	165	71.0	32.9
5	4824.00	52.0 PK	74.0	-22.0	2.43 V	309	46.6	5.4
6	4824.00	39.9 AV	54.0	-14.1	2.43 V	309	34.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	3.81 H	175	34.3	32.9
2	2390.00	50.0 AV	54.0	-4.0	3.81 H	175	17.1	32.9
3	*2417.00	105.7 PK			3.81 H	175	72.8	32.9
4	*2417.00	103.1 AV			3.81 H	175	70.2	32.9
5	4834.00	51.9 PK	74.0	-22.1	2.74 H	25	46.5	5.4
6	4834.00	41.7 AV	54.0	-12.3	2.74 H	25	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.35 V	165	35.4	32.9
2	2390.00	50.8 AV	54.0	-3.2	1.35 V	165	17.9	32.9
3	*2417.00	114.6 PK			1.35 V	165	81.7	32.9
4	*2417.00	104.8 AV			1.35 V	165	71.9	32.9
5	4834.00	51.9 PK	74.0	-22.1	2.52 V	312	46.5	5.4
6	4834.00	39.7 AV	54.0	-14.3	2.52 V	312	34.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	115.1 PK			3.88 H	176	82.2	32.9
2	*2437.00	105.0 AV			3.88 H	176	72.1	32.9
3	4874.00	52.1 PK	74.0	-21.9	2.74 H	26	46.8	5.3
4	4874.00	41.6 AV	54.0	-12.4	2.74 H	26	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.8 PK			1.17 V	165	83.9	32.9
2	*2437.00	106.4 AV			1.17 V	165	73.5	32.9
3	4874.00	52.0 PK	74.0	-22.0	2.53 V	307	46.7	5.3
4	4874.00	39.9 AV	54.0	-14.1	2.53 V	307	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.7 PK			3.75 H	172	79.8	32.9
2	*2462.00	102.6 AV			3.75 H	172	69.7	32.9
3	2483.50	68.1 PK	74.0	-5.9	3.75 H	172	35.2	32.9
4	2483.50	51.0 AV	54.0	-3.0	3.75 H	172	18.1	32.9
5	4924.00	52.1 PK	74.0	-21.9	2.60 H	22	46.8	5.3
6	4924.00	42.1 AV	54.0	-11.9	2.60 H	22	36.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			1.28 V	165	80.5	32.9
2	*2462.00	103.5 AV			1.28 V	165	70.6	32.9
3	2483.50	69.9 PK	74.0	-4.1	1.28 V	165	37.0	32.9
4	2483.50	52.2 AV	54.0	-1.8	1.28 V	165	19.3	32.9
5	4924.00	51.6 PK	74.0	-22.4	2.50 V	321	46.3	5.3
6	4924.00	39.9 AV	54.0	-14.1	2.50 V	321	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.7 PK			3.80 H	177	77.7	33.0
2	*2467.00	101.3 AV			3.80 H	177	68.3	33.0
3	2483.50	65.1 PK	74.0	-8.9	3.80 H	177	32.2	32.9
4	2483.50	49.8 AV	54.0	-4.2	3.80 H	177	16.9	32.9
5	4934.00	51.8 PK	74.0	-22.2	2.66 H	29	46.5	5.3
6	4934.00	42.0 AV	54.0	-12.0	2.66 H	29	36.7	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.3 PK			1.28 V	165	79.3	33.0
2	*2467.00	103.2 AV			1.28 V	165	70.2	33.0
3	2483.50	68.9 PK	74.0	-5.1	1.28 V	165	36.0	32.9
4	2483.50	52.4 AV	54.0	-1.6	1.28 V	165	19.5	32.9
5	4934.00	51.4 PK	74.0	-22.6	2.50 V	333	46.1	5.3
6	4934.00	39.9 AV	54.0	-14.1	2.50 V	333	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.3 PK			3.78 H	197	76.3	33.0
2	*2472.00	100.4 AV			3.78 H	197	67.4	33.0
3	2483.50	71.1 PK	74.0	-2.9	3.78 H	197	38.2	32.9
4	2483.50	49.4 AV	54.0	-4.6	3.78 H	197	16.5	32.9
5	4944.00	51.9 PK	74.0	-22.1	2.72 H	33	46.5	5.4
6	4944.00	42.0 AV	54.0	-12.0	2.72 H	33	36.6	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.9 PK			1.25 V	163	77.9	33.0
2	*2472.00	101.2 AV			1.25 V	163	68.2	33.0
3	2483.50	72.5 PK	74.0	-1.5	1.25 V	163	39.6	32.9
4	2483.50	49.4 AV	54.0	-4.6	1.25 V	163	16.5	32.9
5	4944.00	51.4 PK	74.0	-22.6	2.57 V	316	46.0	5.4
6	4944.00	39.6 AV	54.0	-14.4	2.57 V	316	34.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	3.91 H	174	28.0	32.9
2	2390.00	48.4 AV	54.0	-5.6	3.91 H	174	15.5	32.9
3	*2412.00	110.7 PK			3.91 H	174	77.8	32.9
4	*2412.00	99.9 AV			3.91 H	174	67.0	32.9
5	4824.00	52.0 PK	74.0	-22.0	2.69 H	20	46.6	5.4
6	4824.00	41.9 AV	54.0	-12.1	2.69 H	20	36.5	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.23 V	164	31.5	32.9
2	2390.00	51.4 AV	54.0	-2.6	1.23 V	164	18.5	32.9
3	*2412.00	112.4 PK			1.23 V	164	79.5	32.9
4	*2412.00	101.1 AV			1.23 V	164	68.2	32.9
5	4824.00	51.7 PK	74.0	-22.3	2.44 V	305	46.3	5.4
6	4824.00	40.0 AV	54.0	-14.0	2.44 V	305	34.6	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	3.85 H	166	27.2	32.9
2	2390.00	46.9 AV	54.0	-7.1	3.85 H	166	14.0	32.9
3	*2437.00	114.9 PK			3.85 H	166	82.0	32.9
4	*2437.00	103.3 AV			3.85 H	166	70.4	32.9
5	4874.00	52.2 PK	74.0	-21.8	2.80 H	32	46.9	5.3
6	4874.00	42.1 AV	54.0	-11.9	2.80 H	32	36.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.4 PK	74.0	-5.6	1.34 V	167	35.5	32.9
2	2390.00	51.1 AV	54.0	-2.9	1.34 V	167	18.2	32.9
3	*2437.00	115.9 PK			1.34 V	167	83.0	32.9
4	*2437.00	104.5 AV			1.34 V	167	71.6	32.9
5	4874.00	51.9 PK	74.0	-22.1	2.57 V	308	46.6	5.3
6	4874.00	39.9 AV	54.0	-14.1	2.57 V	308	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			3.80 H	173	80.5	32.9
2	*2462.00	102.0 AV			3.80 H	173	69.1	32.9
3	2483.50	69.0 PK	74.0	-5.0	3.80 H	173	36.1	32.9
4	2483.50	51.0 AV	54.0	-3.0	3.80 H	173	18.1	32.9
5	4924.00	52.1 PK	74.0	-21.9	2.64 H	24	46.8	5.3
6	4924.00	42.1 AV	54.0	-11.9	2.64 H	24	36.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.5 PK			1.33 V	154	81.6	32.9
2	*2462.00	103.2 AV			1.33 V	154	70.3	32.9
3	2483.50	71.7 PK	74.0	-2.3	1.33 V	154	38.8	32.9
4	2483.50	52.5 AV	54.0	-1.5	1.33 V	154	19.6	32.9
5	4924.00	51.6 PK	74.0	-22.4	2.44 V	308	46.3	5.3
6	4924.00	39.9 AV	54.0	-14.1	2.44 V	308	34.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.4 PK			3.76 H	201	79.4	33.0
2	*2467.00	100.5 AV			3.76 H	201	67.5	33.0
3	2483.50	64.1 PK	74.0	-9.9	3.76 H	201	31.2	32.9
4	2483.50	50.9 AV	54.0	-3.1	3.76 H	201	18.0	32.9
5	4934.00	52.1 PK	74.0	-21.9	2.72 H	25	46.8	5.3
6	4934.00	42.1 AV	54.0	-11.9	2.72 H	25	36.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.6 PK			1.00 V	154	81.6	33.0
2	*2467.00	102.3 AV			1.00 V	154	69.3	33.0
3	2483.50	65.9 PK	74.0	-8.1	1.00 V	154	33.0	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.00 V	154	18.5	32.9
5	4934.00	51.6 PK	74.0	-22.4	2.51 V	312	46.3	5.3
6	4934.00	39.6 AV	54.0	-14.4	2.51 V	312	34.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.8 PK			3.88 H	194	75.8	33.0
2	*2472.00	98.5 AV			3.88 H	194	65.5	33.0
3	2483.50	68.4 PK	74.0	-5.6	3.88 H	194	35.5	32.9
4	2483.50	48.4 AV	54.0	-5.6	3.88 H	194	15.5	32.9
5	4944.00	51.9 PK	74.0	-22.1	2.70 H	31	46.5	5.4
6	4944.00	42.0 AV	54.0	-12.0	2.70 H	31	36.6	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.8 PK			1.05 V	153	78.8	33.0
2	*2472.00	100.6 AV			1.05 V	153	67.6	33.0
3	2483.50	72.4 PK	74.0	-1.6	1.05 V	153	39.5	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.05 V	153	18.5	32.9
5	4944.00	51.6 PK	74.0	-22.4	2.46 V	311	46.2	5.4
6	4944.00	39.7 AV	54.0	-14.3	2.46 V	311	34.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	3.88 H	175	26.0	32.9
2	2390.00	46.6 AV	54.0	-7.4	3.88 H	175	13.7	32.9
3	*2422.00	107.6 PK			3.88 H	175	74.7	32.9
4	*2422.00	96.7 AV			3.88 H	175	63.8	32.9
5	4844.00	51.9 PK	74.0	-22.1	2.71 H	25	46.5	5.4
6	4844.00	41.7 AV	54.0	-12.3	2.71 H	25	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.31 V	164	32.0	32.9
2	2390.00	51.1 AV	54.0	-2.9	1.31 V	164	18.2	32.9
3	*2422.00	110.0 PK			1.31 V	164	77.1	32.9
4	*2422.00	98.0 AV			1.31 V	164	65.1	32.9
5	4844.00	51.6 PK	74.0	-22.4	2.44 V	312	46.2	5.4
6	4844.00	39.7 AV	54.0	-14.3	2.44 V	312	34.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	3.87 H	170	28.6	32.9
2	2390.00	47.4 AV	54.0	-6.6	3.87 H	170	14.5	32.9
3	*2437.00	109.7 PK			3.87 H	170	76.8	32.9
4	*2437.00	97.7 AV			3.87 H	170	64.8	32.9
5	4874.00	52.3 PK	74.0	-21.7	2.62 H	23	47.0	5.3
6	4874.00	41.6 AV	54.0	-12.4	2.62 H	23	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.21 V	164	36.0	32.9
2	2390.00	52.5 AV	54.0	-1.5	1.21 V	164	19.6	32.9
3	*2437.00	111.1 PK			1.21 V	164	78.2	32.9
4	*2437.00	99.1 AV			1.21 V	164	66.2	32.9
5	4874.00	51.6 PK	74.0	-22.4	2.40 V	304	46.3	5.3
6	4874.00	39.8 AV	54.0	-14.2	2.40 V	304	34.5	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	109.2 PK			3.79 H	177	76.3	32.9
2	*2452.00	97.5 AV			3.79 H	177	64.6	32.9
3	2483.50	65.3 PK	74.0	-8.7	3.79 H	177	32.4	32.9
4	2483.50	50.3 AV	54.0	-3.7	3.79 H	177	17.4	32.9
5	4904.00	51.9 PK	74.0	-22.1	2.77 H	33	46.7	5.2
6	4904.00	41.7 AV	54.0	-12.3	2.77 H	33	36.5	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.2 PK			1.35 V	166	77.3	32.9
2	*2452.00	98.4 AV			1.35 V	166	65.5	32.9
3	2483.50	71.7 PK	74.0	-2.3	1.35 V	16	38.8	32.9
4	2483.50	52.3 AV	54.0	-1.7	1.35 V	16	19.4	32.9
5	4904.00	51.5 PK	74.0	-22.5	2.61 V	316	46.3	5.2
6	4904.00	39.7 AV	54.0	-14.3	2.61 V	316	34.5	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	109.3 PK			3.88 H	197	76.4	32.9
2	*2457.00	97.0 AV			3.88 H	197	64.1	32.9
3	2483.50	62.1 PK	74.0	-11.9	3.88 H	197	29.2	32.9
4	2483.50	48.4 AV	54.0	-5.6	3.88 H	197	15.5	32.9
5	4914.00	51.6 PK	74.0	-22.4	2.66 H	33	46.4	5.2
6	4914.00	41.6 AV	54.0	-12.4	2.66 H	33	36.4	5.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	111.2 PK			1.30 V	162	78.3	32.9
2	*2457.00	97.9 AV			1.30 V	162	65.0	32.9
3	2483.50	66.6 PK	74.0	-7.4	1.30 V	162	33.7	32.9
4	2483.50	51.4 AV	54.0	-2.6	1.30 V	162	18.5	32.9
5	4914.00	51.0 PK	74.0	-23.0	2.57 V	303	45.8	5.2
6	4914.00	39.9 AV	54.0	-14.1	2.57 V	303	34.7	5.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.8 PK			3.75 H	173	75.9	32.9
2	*2462.00	96.3 AV			3.75 H	173	63.4	32.9
3	2483.50	68.1 PK	74.0	-5.9	3.75 H	173	35.2	32.9
4	2483.50	49.0 AV	54.0	-5.0	3.75 H	173	16.1	32.9
5	4924.00	51.8 PK	74.0	-22.2	2.77 H	22	46.5	5.3
6	4924.00	41.6 AV	54.0	-12.4	2.77 H	22	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.9 PK			1.23 V	164	77.0	32.9
2	*2462.00	97.4 AV			1.23 V	164	64.5	32.9
3	2483.50	72.4 PK	74.0	-1.6	1.23 V	164	39.5	32.9
4	2483.50	51.3 AV	54.0	-2.7	1.23 V	164	18.4	32.9
5	4924.00	51.7 PK	74.0	-22.3	2.59 V	307	46.4	5.3
6	4924.00	39.7 AV	54.0	-14.3	2.59 V	307	34.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	3.84 H	176	32.6	32.9
2	2390.00	46.6 AV	54.0	-7.4	3.84 H	176	13.7	32.9
3	*2412.00	121.5 PK			3.84 H	176	88.6	32.9
4	*2412.00	109.8 AV			3.84 H	176	76.9	32.9
5	4824.00	53.0 PK	74.0	-21.0	2.83 H	34	47.6	5.4
6	4824.00	41.7 AV	54.0	-12.3	2.83 H	34	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.00 V	19	35.7	32.9
2	2390.00	47.4 AV	54.0	-6.6	1.00 V	19	14.5	32.9
3	*2412.00	123.4 PK			1.00 V	19	90.5	32.9
4	*2412.00	111.6 AV			1.00 V	19	78.7	32.9
5	4824.00	52.3 PK	74.0	-21.7	2.63 V	304	46.9	5.4
6	4824.00	41.1 AV	54.0	-12.9	2.63 V	304	35.7	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.5 PK			3.81 H	172	80.6	32.9
2	*2437.00	111.8 AV			3.81 H	172	78.9	32.9
3	4874.00	52.8 PK	74.0	-21.2	2.88 H	34	47.5	5.3
4	4874.00	41.8 AV	54.0	-12.2	2.88 H	34	36.5	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	125.2 PK			1.00 V	19	92.3	32.9
2	*2437.00	113.5 AV			1.00 V	19	80.6	32.9
3	4874.00	52.2 PK	74.0	-21.8	2.68 V	304	46.9	5.3
4	4874.00	40.9 AV	54.0	-13.1	2.68 V	304	35.6	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.8 PK			3.86 H	172	86.9	32.9
2	*2462.00	108.5 AV			3.86 H	172	75.6	32.9
3	2483.50	66.7 PK	74.0	-7.3	3.86 H	172	33.8	32.9
4	2483.50	47.1 AV	54.0	-6.9	3.86 H	172	14.2	32.9
5	4924.00	52.8 PK	74.0	-21.2	2.78 H	29	47.5	5.3
6	4924.00	41.6 AV	54.0	-12.4	2.78 H	29	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	121.5 PK			1.01 V	181	88.6	32.9
2	*2462.00	110.1 AV			1.01 V	181	77.2	32.9
3	2483.50	68.0 PK	74.0	-6.0	1.01 V	181	35.1	32.9
4	2483.50	48.0 AV	54.0	-6.0	1.01 V	181	15.1	32.9
5	4924.00	52.1 PK	74.0	-21.9	2.57 V	360	46.8	5.3
6	4924.00	40.7 AV	54.0	-13.3	2.57 V	360	35.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.8 PK			3.76 H	178	86.8	33.0
2	*2467.00	108.5 AV			3.76 H	178	75.5	33.0
3	2483.50	68.1 PK	74.0	-5.9	3.76 H	178	35.2	32.9
4	2483.50	47.0 AV	54.0	-7.0	3.76 H	178	14.1	32.9
5	4934.00	52.7 PK	74.0	-21.3	2.87 H	39	47.4	5.3
6	4934.00	41.5 AV	54.0	-12.5	2.87 H	39	36.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	121.4 PK			1.02 V	181	88.4	33.0
2	*2467.00	110.1 AV			1.02 V	181	77.1	33.0
3	2483.50	69.5 PK	74.0	-4.5	1.02 V	181	36.6	32.9
4	2483.50	47.7 AV	54.0	-6.3	1.02 V	181	14.8	32.9
5	4934.00	52.1 PK	74.0	-21.9	2.57 V	306	46.8	5.3
6	4934.00	40.7 AV	54.0	-13.3	2.57 V	306	35.4	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.7 PK			3.82 H	176	83.7	33.0
2	*2472.00	105.4 AV			3.82 H	176	72.4	33.0
3	2483.50	71.0 PK	74.0	-3.0	3.82 H	176	38.1	32.9
4	2483.50	49.1 AV	54.0	-4.9	3.82 H	176	16.2	32.9
5	4944.00	52.7 PK	74.0	-21.3	2.79 H	36	47.3	5.4
6	4944.00	41.7 AV	54.0	-12.3	2.79 H	36	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	118.3 PK			1.00 V	155	85.3	33.0
2	*2472.00	106.9 AV			1.00 V	155	73.9	33.0
3	2483.50	72.3 PK	74.0	-1.7	1.00 V	155	39.4	32.9
4	2483.50	50.3 AV	54.0	-3.7	1.00 V	155	17.4	32.9
5	4944.00	51.9 PK	74.0	-22.1	2.57 V	302	46.5	5.4
6	4944.00	40.7 AV	54.0	-13.3	2.57 V	302	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	3.79 H	180	27.8	32.9
2	2390.00	46.4 AV	54.0	-7.6	3.79 H	180	13.5	32.9
3	*2412.00	118.1 PK			3.79 H	180	85.2	32.9
4	*2412.00	106.3 AV			3.79 H	180	73.4	32.9
5	4824.00	52.9 PK	74.0	-21.1	2.74 H	26	47.5	5.4
6	4824.00	41.7 AV	54.0	-12.3	2.74 H	26	36.3	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.06 V	13	28.9	32.9
2	2390.00	46.8 AV	54.0	-7.2	1.06 V	13	13.9	32.9
3	*2412.00	119.7 PK			1.06 V	13	86.8	32.9
4	*2412.00	108.0 AV			1.06 V	13	75.1	32.9
5	4824.00	52.1 PK	74.0	-21.9	2.57 V	306	46.7	5.4
6	4824.00	40.9 AV	54.0	-13.1	2.57 V	306	35.5	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	121.0 PK			3.76 H	174	88.1	32.9
2	*2437.00	109.2 AV			3.76 H	174	76.3	32.9
3	4874.00	52.9 PK	74.0	-21.1	2.87 H	34	47.6	5.3
4	4874.00	41.6 AV	54.0	-12.4	2.87 H	34	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	122.6 PK			1.01 V	17	89.7	32.9
2	*2437.00	111.0 AV			1.01 V	17	78.1	32.9
3	4874.00	52.1 PK	74.0	-21.9	2.65 V	301	46.8	5.3
4	4874.00	40.8 AV	54.0	-13.2	2.65 V	301	35.5	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.8 PK			3.73 H	182	82.9	32.9
2	*2462.00	104.6 AV			3.73 H	182	71.7	32.9
3	2483.50	63.2 PK	74.0	-10.8	3.73 H	182	30.3	32.9
4	2483.50	47.0 AV	54.0	-7.0	3.73 H	182	14.1	32.9
5	4924.00	52.6 PK	74.0	-21.4	2.87 H	35	47.3	5.3
6	4924.00	41.5 AV	54.0	-12.5	2.87 H	35	36.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.4 PK			1.01 V	180	84.5	32.9
2	*2462.00	106.1 AV			1.01 V	180	73.2	32.9
3	2483.50	64.5 PK	74.0	-9.5	1.01 V	180	31.6	32.9
4	2483.50	47.5 AV	54.0	-6.5	1.01 V	180	14.6	32.9
5	4924.00	51.9 PK	74.0	-22.1	2.53 V	360	46.6	5.3
6	4924.00	40.6 AV	54.0	-13.4	2.53 V	360	35.3	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.2 PK			3.79 H	177	83.2	33.0
2	*2467.00	104.8 AV			3.79 H	177	71.8	33.0
3	2483.50	64.7 PK	74.0	-9.3	3.79 H	177	31.8	32.9
4	2483.50	47.0 AV	54.0	-7.0	3.79 H	177	14.1	32.9
5	4934.00	52.6 PK	74.0	-21.4	2.85 H	31	47.3	5.3
6	4934.00	41.5 AV	54.0	-12.5	2.85 H	31	36.2	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.8 PK			1.03 V	181	84.8	33.0
2	*2467.00	106.4 AV			1.03 V	181	73.4	33.0
3	2483.50	66.1 PK	74.0	-7.9	1.03 V	181	33.2	32.9
4	2483.50	47.7 AV	54.0	-6.3	1.03 V	181	14.8	32.9
5	4934.00	51.7 PK	74.0	-22.3	2.56 V	301	46.4	5.3
6	4934.00	40.5 AV	54.0	-13.5	2.56 V	301	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.9 PK			3.79 H	183	81.9	33.0
2	*2472.00	103.5 AV			3.79 H	183	70.5	33.0
3	2483.50	70.5 PK	74.0	-3.5	3.79 H	183	37.6	32.9
4	2483.50	49.0 AV	54.0	-5.0	3.79 H	183	16.1	32.9
5	4944.00	52.7 PK	74.0	-21.3	2.88 H	25	47.3	5.4
6	4944.00	41.5 AV	54.0	-12.5	2.88 H	25	36.1	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.4 PK			1.01 V	170	83.4	33.0
2	*2472.00	105.1 AV			1.01 V	170	72.1	33.0
3	2483.50	72.2 PK	74.0	-1.8	1.01 V	170	39.3	32.9
4	2483.50	50.1 AV	54.0	-3.9	1.01 V	170	17.2	32.9
5	4944.00	51.7 PK	74.0	-22.3	2.57 V	308	46.3	5.4
6	4944.00	40.7 AV	54.0	-13.3	2.57 V	308	35.3	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	3.84 H	179	30.9	32.9
2	2390.00	46.7 AV	54.0	-7.3	3.84 H	179	13.8	32.9
3	*2412.00	116.1 PK			3.84 H	179	83.2	32.9
4	*2412.00	104.3 AV			3.84 H	179	71.4	32.9
5	4824.00	52.7 PK	74.0	-21.3	2.76 H	35	47.3	5.4
6	4824.00	41.5 AV	54.0	-12.5	2.76 H	35	36.1	5.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.04 V	17	33.2	32.9
2	2390.00	47.7 AV	54.0	-6.3	1.04 V	17	14.8	32.9
3	*2412.00	117.8 PK			1.04 V	17	84.9	32.9
4	*2412.00	106.0 AV			1.04 V	17	73.1	32.9
5	4824.00	51.9 PK	74.0	-22.1	2.76 V	35	46.5	5.4
6	4824.00	40.6 AV	54.0	-13.4	2.76 V	35	35.2	5.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	3.73 H	173	37.9	32.9
2	2390.00	46.8 AV	54.0	-7.2	3.73 H	173	13.9	32.9
3	*2437.00	119.1 PK			3.73 H	173	86.2	32.9
4	*2437.00	107.4 AV			3.73 H	173	74.5	32.9
5	4874.00	52.9 PK	74.0	-21.1	2.87 H	34	47.6	5.3
6	4874.00	41.6 AV	54.0	-12.4	2.87 H	34	36.3	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.01 V	20	39.4	32.9
2	2390.00	47.7 AV	54.0	-6.3	1.01 V	20	14.8	32.9
3	*2437.00	121.1 PK			1.01 V	20	88.2	32.9
4	*2437.00	109.2 AV			1.01 V	20	76.3	32.9
5	4874.00	51.9 PK	74.0	-22.1	2.66 V	296	46.6	5.3
6	4874.00	40.5 AV	54.0	-13.5	2.66 V	296	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.5 PK			3.82 H	169	80.6	32.9
2	*2462.00	102.1 AV			3.82 H	169	69.2	32.9
3	2483.50	64.1 PK	74.0	-9.9	3.82 H	169	31.2	32.9
4	2483.50	47.1 AV	54.0	-6.9	3.82 H	169	14.2	32.9
5	4924.00	52.3 PK	74.0	-21.7	2.89 H	41	47.0	5.3
6	4924.00	41.1 AV	54.0	-12.9	2.89 H	41	35.8	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.2 PK			1.02 V	193	82.3	32.9
2	*2462.00	103.7 AV			1.02 V	193	70.8	32.9
3	2483.50	65.3 PK	74.0	-8.7	1.02 V	193	32.4	32.9
4	2483.50	47.7 AV	54.0	-6.3	1.02 V	193	14.8	32.9
5	4924.00	51.4 PK	74.0	-22.6	2.59 V	302	46.1	5.3
6	4924.00	40.2 AV	54.0	-13.8	2.59 V	302	34.9	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.4 PK			3.78 H	175	81.4	33.0
2	*2467.00	103.1 AV			3.78 H	175	70.1	33.0
3	2483.50	70.8 PK	74.0	-3.2	3.78 H	175	37.9	32.9
4	2483.50	49.1 AV	54.0	-4.9	3.78 H	175	16.2	32.9
5	4934.00	52.4 PK	74.0	-21.6	2.82 H	30	47.1	5.3
6	4934.00	41.2 AV	54.0	-12.8	2.82 H	30	35.9	5.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.2 PK			1.00 V	192	83.2	33.0
2	*2467.00	104.6 AV			1.00 V	192	71.6	33.0
3	2483.50	72.2 PK	74.0	-1.8	1.00 V	192	39.3	32.9
4	2483.50	50.2 AV	54.0	-3.8	1.00 V	192	17.3	32.9
5	4934.00	51.6 PK	74.0	-22.4	2.62 V	293	46.3	5.3
6	4934.00	40.5 AV	54.0	-13.5	2.62 V	293	35.2	5.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.