


For U-NII-7

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	149	6695	6695	-78.72	-2.28	0	-76.44	-62	OFF
					-79.22	-2.28	0	-76.94	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	160	143	6665	6590	-76.41	-2.28	0	-74.13	-62	OFF
					-76.91	-2.28	0	-74.63	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				6665	-78.52	-2.28	0	-76.24	-62	OFF
					-79.02	-2.28	0	-76.74	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				6740	-76.73	-2.28	0	-74.45	-62	OFF
					-77.23	-2.28	0	-74.95	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6695	v	v	x	v	v	v	v	v	v	v	90%	90%	Pass
	160	6590	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6665	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6740	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

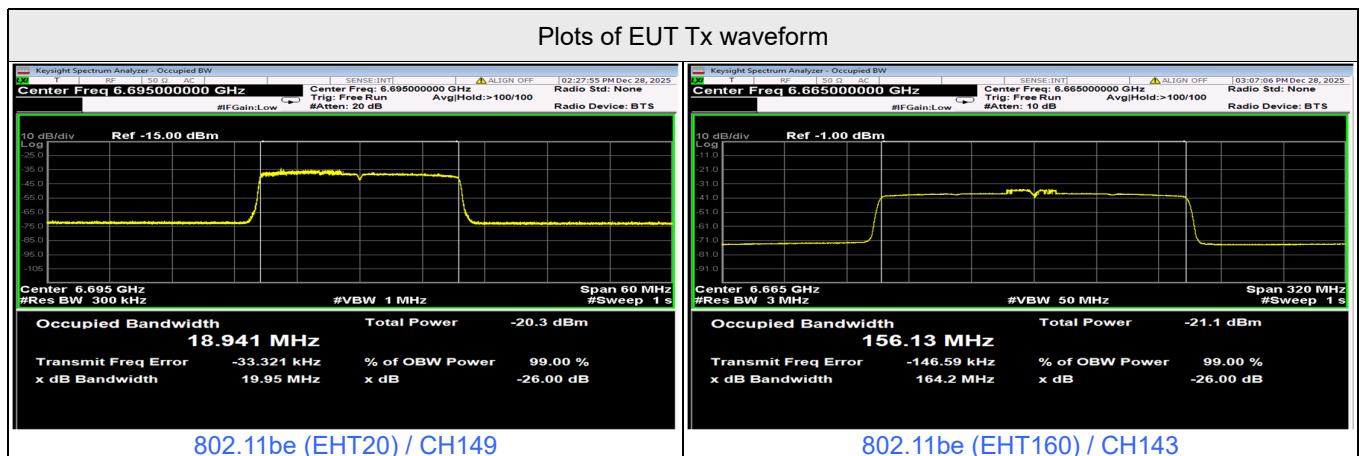

Plots of Injected signal (AWGN) level

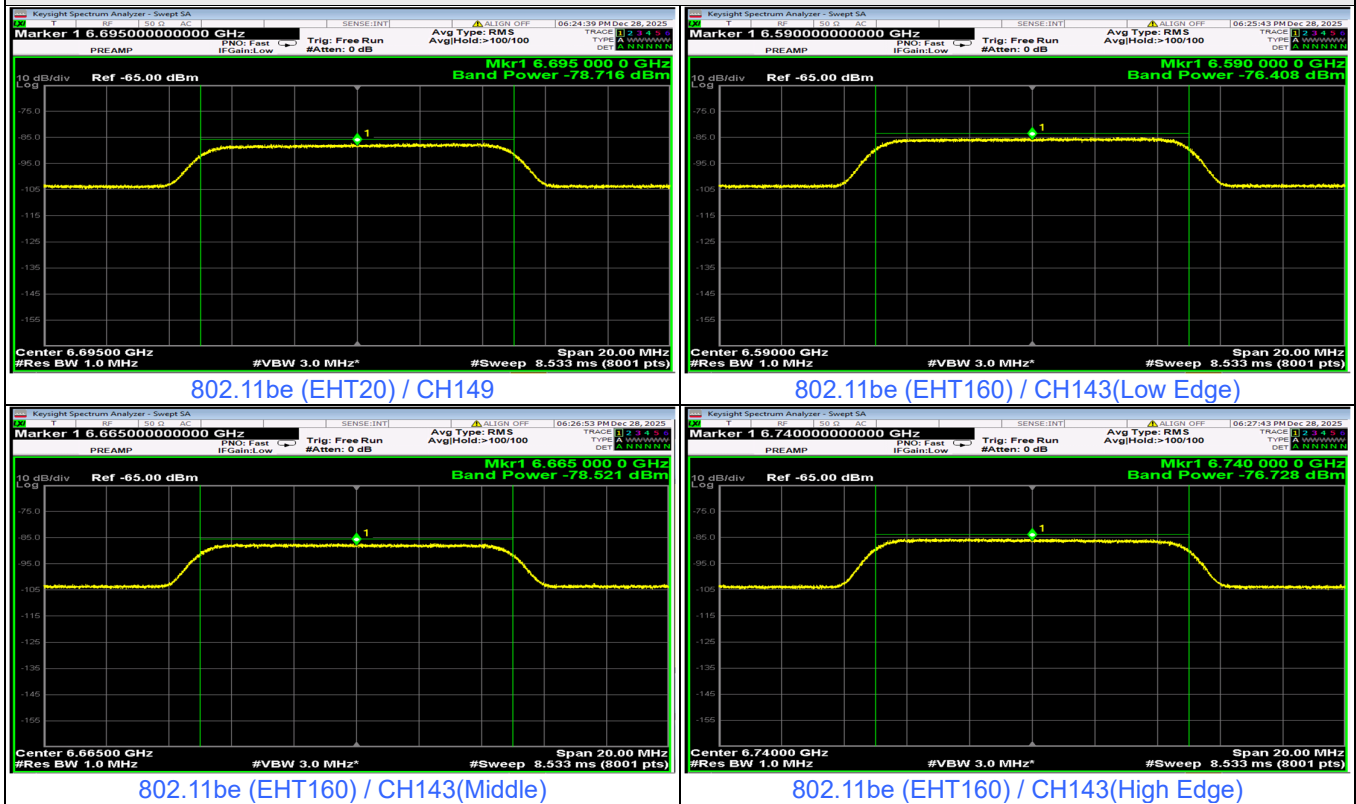


Plots of EUT ceased transmission in the time domain

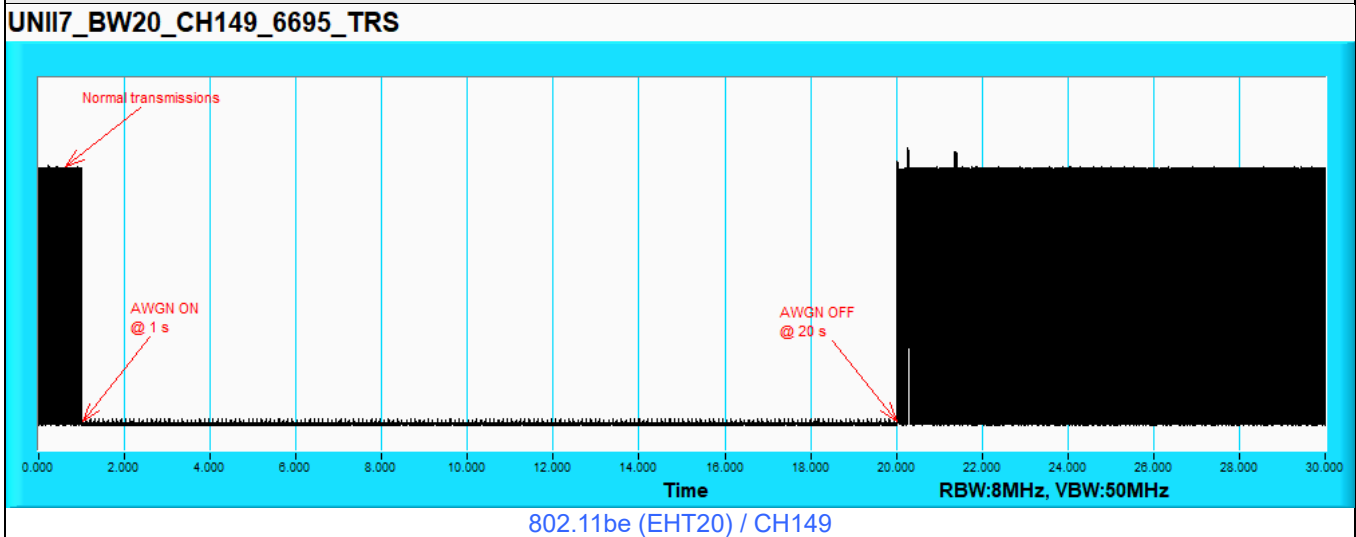


Plots of EUT ceased transmission in the time domain

UNII7_BW160_CH143_6590_TRS

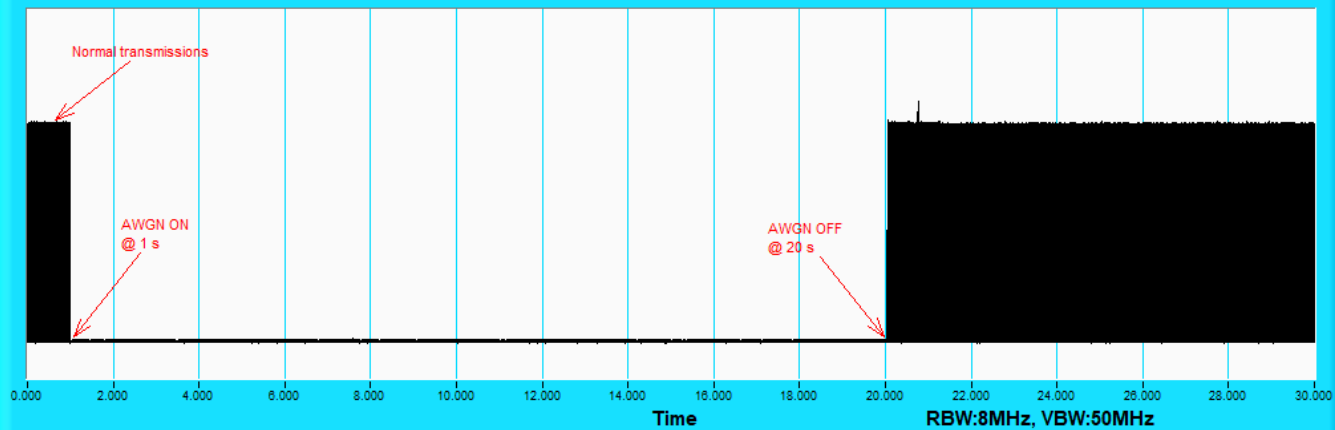


802.11be (EHT160) / CH143(Low Edge)

UNII7_BW160_CH143_6665_TRS

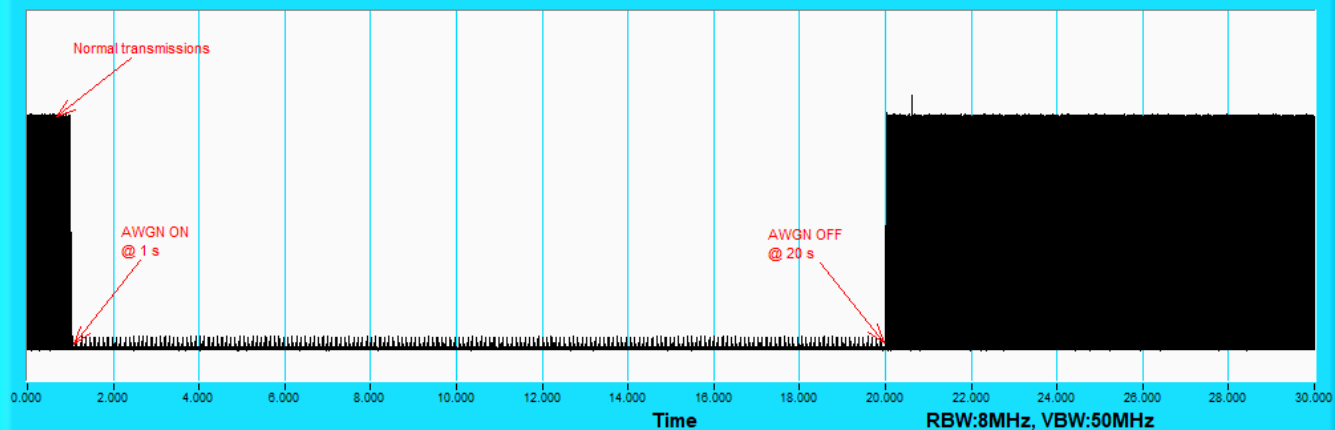

802.11be (EHT160) / CH143(Middle)

UNII7_BW160_CH143_6740_TRS

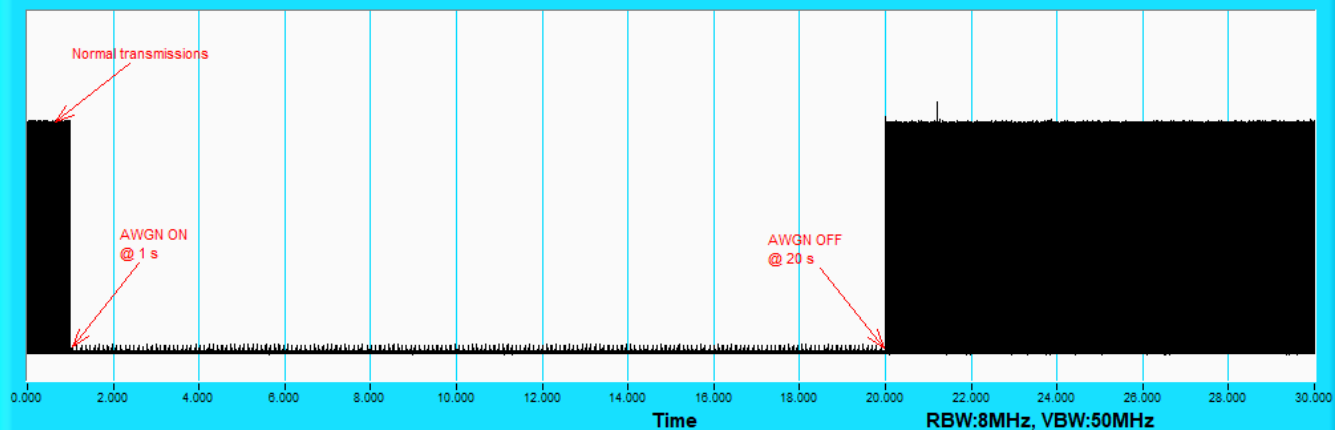

802.11be (EHT160) / CH143(High Edge)


For U-NII-8

Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	197	6935	6935	-79.86	-2.28	0	-77.58	-62	OFF
					-80.36	-2.28	0	-78.08	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
	160	207	6985	6910	-78.28	-2.28	0	-76	-62	OFF
					-78.78	-2.28	0	-76.5	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				6985	-78.7	-2.28	0	-76.42	-62	OFF
					-79.2	-2.28	0	-76.92	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON
				7060	-75.88	-2.28	0	-73.6	-62	OFF
					-76.38	-2.28	0	-74.1	-62	Minimal
					-84.28	-2.28	0	-82	-62	ON


Notes:

1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.


Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6935	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	160	6910	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		6985	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
		7060	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass

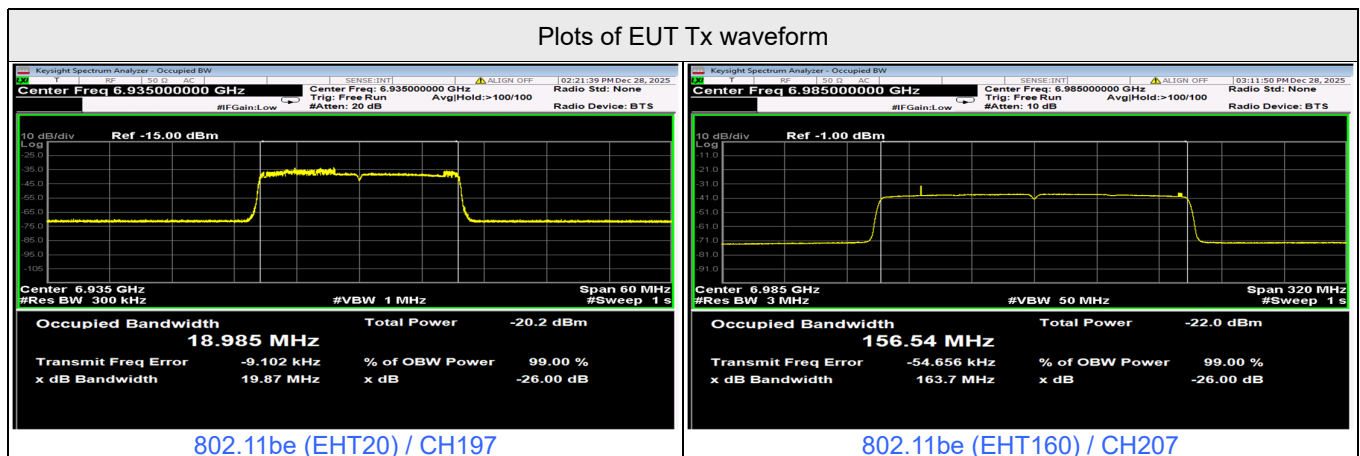

Plots of Injected signal (AWGN) level

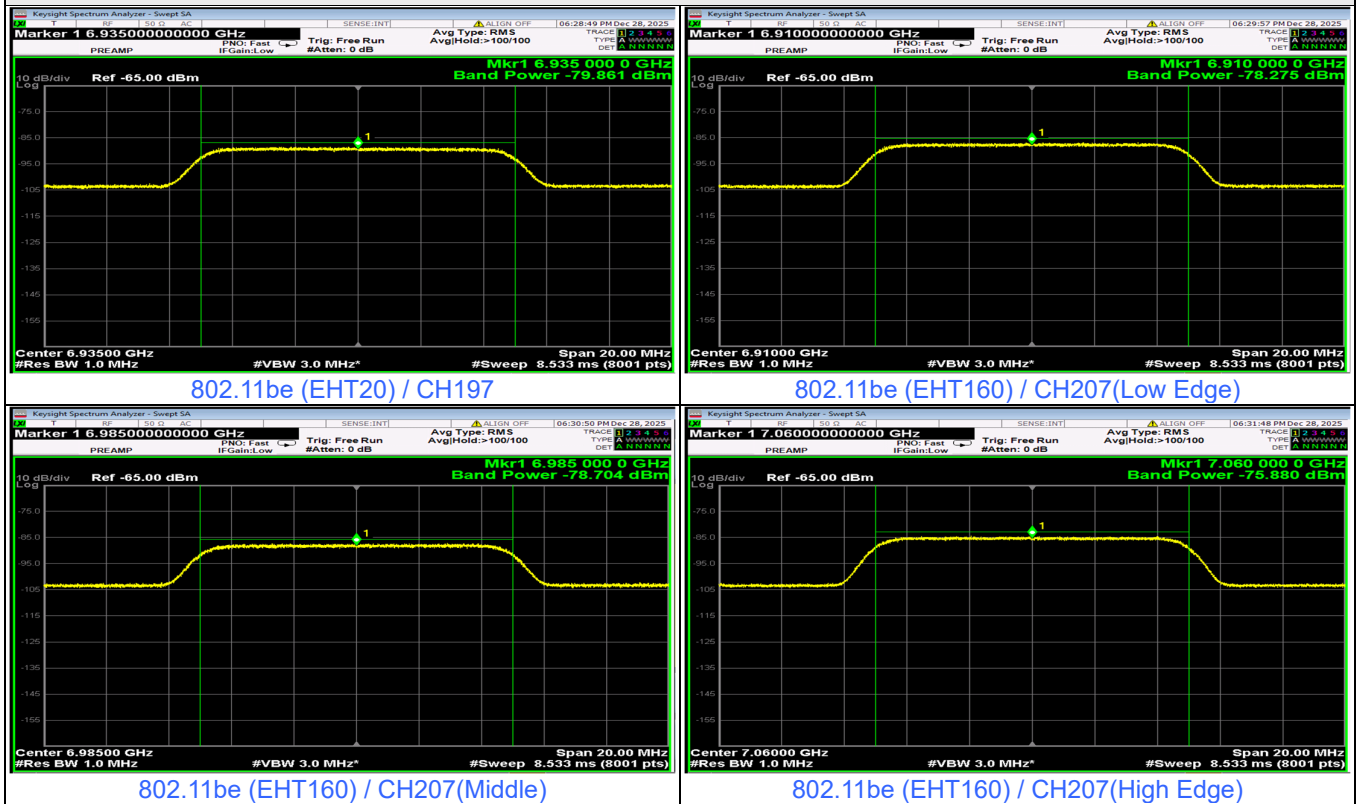


Plots of EUT ceased transmission in the time domain

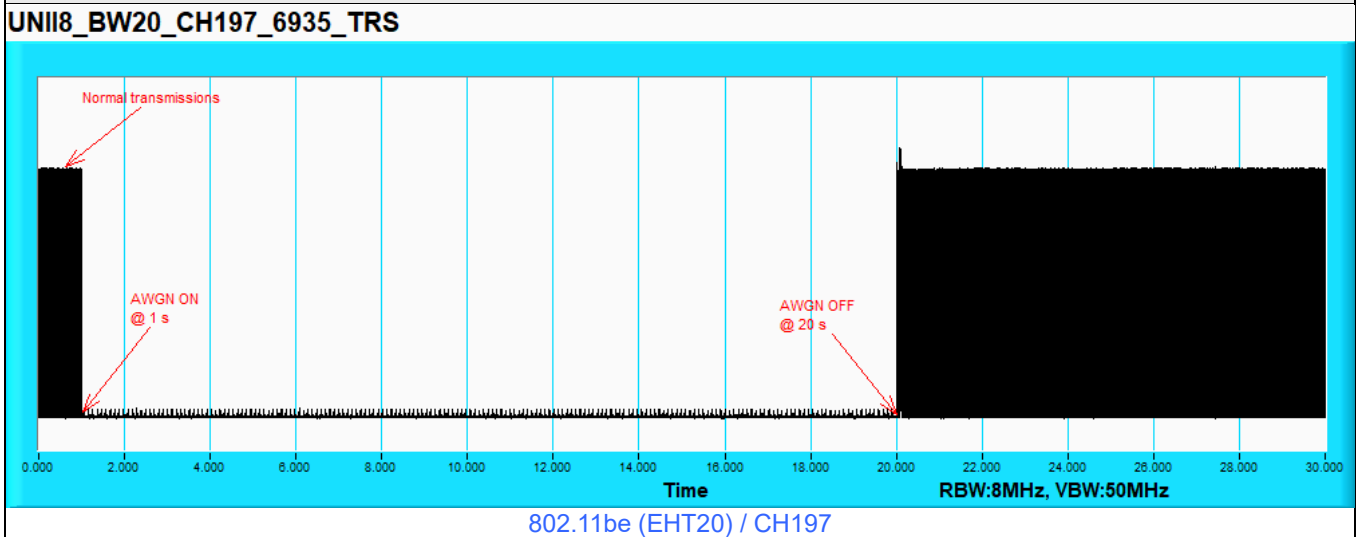


Plots of EUT ceased transmission in the time domain

UNII8_BW160_CH207_6910_TRS

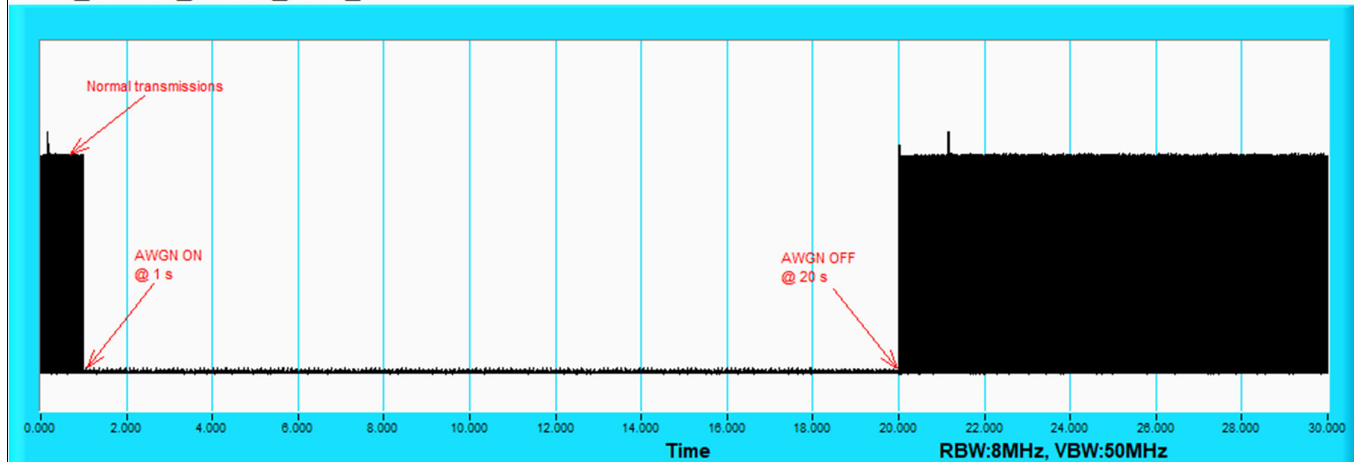


802.11be (EHT160) / CH207(Low Edge)

UNII8_BW160_CH207_6985_TRS

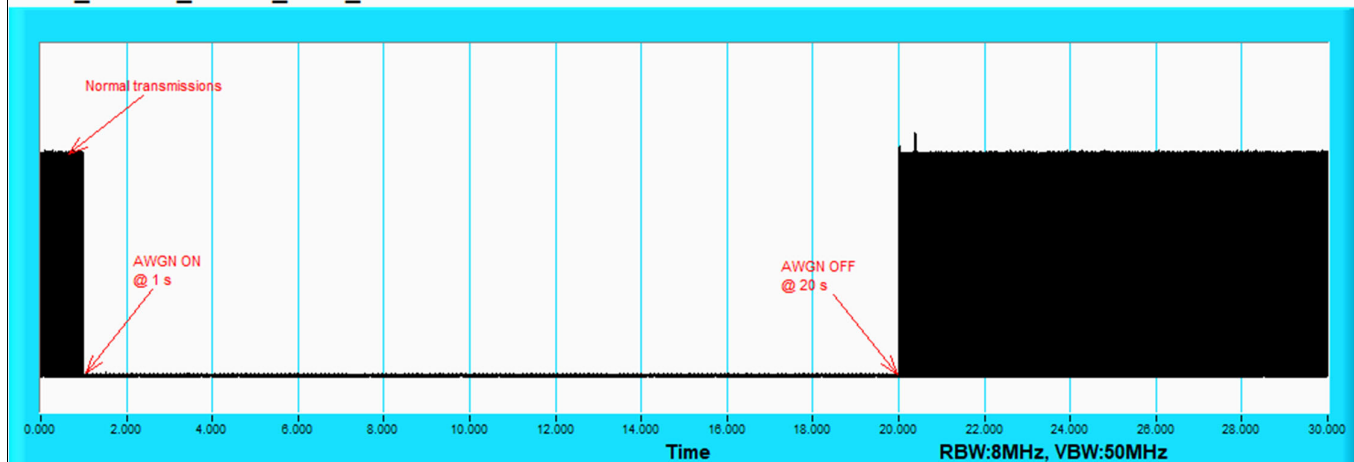

802.11be (EHT160) / CH207(Middle)

UNII8_BW160_CH207_7060_TRS

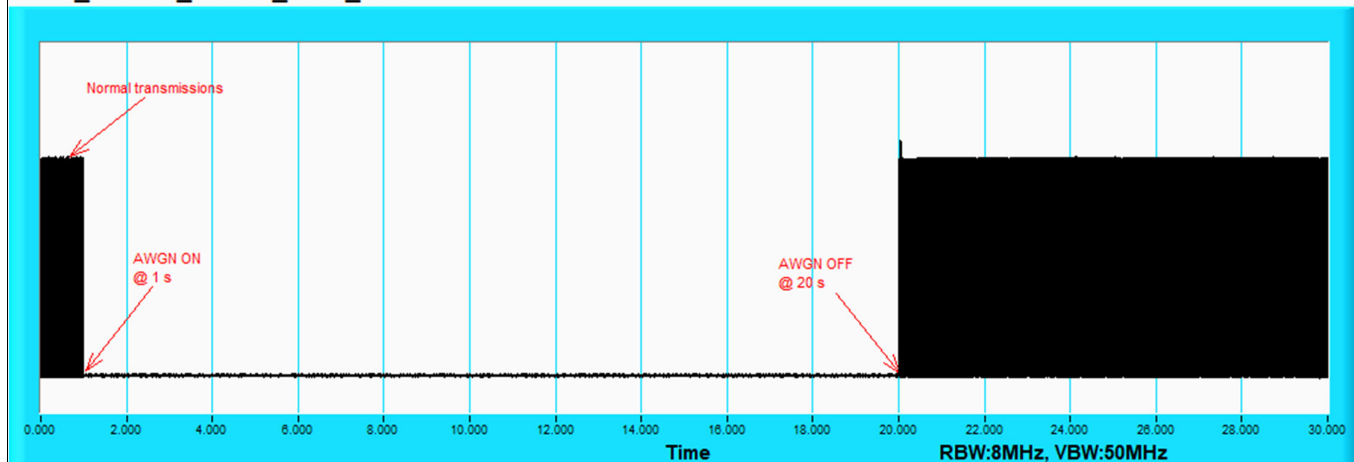

802.11be (EHT160) / CH207(High Edge)

7.7 AC Power Conducted Emissions

Indoor client

Mode A


2Tx NSS2

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Stars Liu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	10.00	38.91	22.94	48.91	32.94	64.08	54.08	-15.17	-21.14
2	2.07813	10.30	20.34	12.30	30.64	22.60	56.00	46.00	-25.36	-23.40
3	4.32422	10.50	19.62	12.24	30.12	22.74	56.00	46.00	-25.88	-23.26
4	6.67188	10.68	15.04	10.04	25.72	20.72	60.00	50.00	-34.28	-29.28
5	14.24219	11.20	27.94	21.09	39.14	32.29	60.00	50.00	-20.86	-17.71
6	21.99219	11.55	22.21	16.55	33.76	28.10	60.00	50.00	-26.24	-21.90
7	25.92578	11.56	17.53	13.72	29.09	25.28	60.00	50.00	-30.91	-24.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

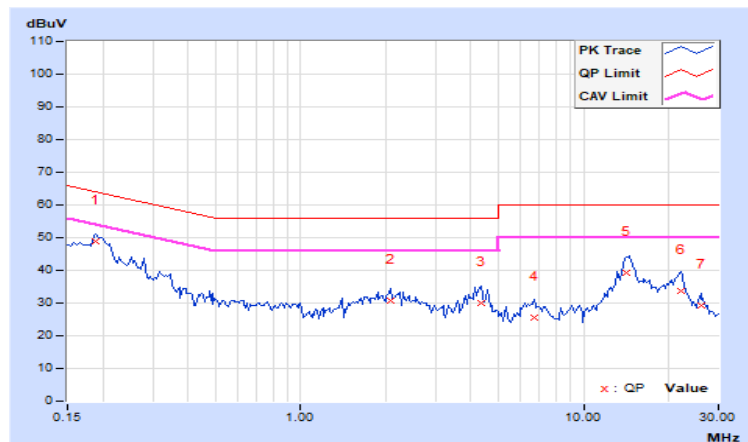


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Stars Liu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18516	9.99	37.76	19.72	47.75	29.71	64.25	54.25	-16.50	-24.54
2	1.76953	10.07	19.90	10.87	29.97	20.94	56.00	46.00	-26.03	-25.06
3	4.40625	10.24	20.20	12.66	30.44	22.90	56.00	46.00	-25.56	-23.10
4	7.04297	10.41	15.26	10.19	25.67	20.60	60.00	50.00	-34.33	-29.40
5	14.25781	10.84	27.03	20.20	37.87	31.04	60.00	50.00	-22.13	-18.96
6	21.68750	11.15	23.85	18.29	35.00	29.44	60.00	50.00	-25.00	-20.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

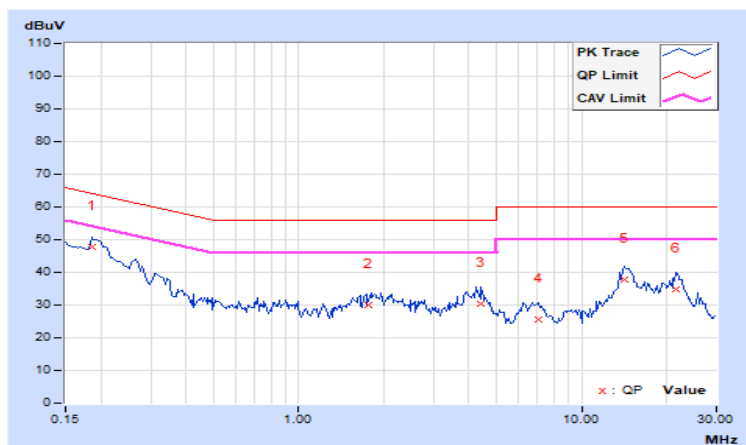

Standard client

Mode A


2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Stars Liu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	10.00	38.97	25.84	48.97	35.84	63.91	53.91	-14.94	-18.07
2	0.25547	10.02	33.05	18.86	43.07	28.88	61.58	51.58	-18.51	-22.70
3	2.34375	10.32	23.05	13.86	33.37	24.18	56.00	46.00	-22.63	-21.82
4	4.23438	10.50	19.95	12.34	30.45	22.84	56.00	46.00	-25.55	-23.16
5	5.08203	10.56	11.72	5.05	22.28	15.61	60.00	50.00	-37.72	-34.39
6	6.87891	10.70	14.98	9.64	25.68	20.34	60.00	50.00	-34.32	-29.66
7	10.05469	10.94	11.64	5.39	22.58	16.33	60.00	50.00	-37.42	-33.67
8	14.94531	11.25	28.97	21.66	40.22	32.91	60.00	50.00	-19.78	-17.09
9	20.21484	11.54	24.51	18.86	36.05	30.40	60.00	50.00	-23.95	-19.60

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

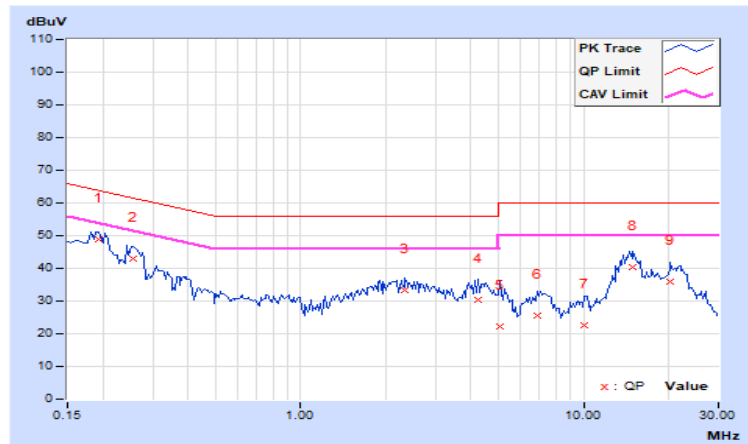


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Stars Liu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19297	9.99	38.35	24.06	48.34	34.05	63.91	53.91	-15.57	-19.86
2	0.89219	10.00	15.13	5.74	25.13	15.74	56.00	46.00	-30.87	-30.26
3	1.84766	10.08	20.54	11.39	30.62	21.47	56.00	46.00	-25.38	-24.53
4	4.14844	10.22	20.61	13.10	30.83	23.32	56.00	46.00	-25.17	-22.68
5	6.55469	10.38	15.74	10.30	26.12	20.68	60.00	50.00	-33.88	-29.32
6	14.37891	10.85	26.95	20.15	37.80	31.00	60.00	50.00	-22.20	-19.00
7	21.28516	11.15	22.66	17.03	33.81	28.18	60.00	50.00	-26.19	-21.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

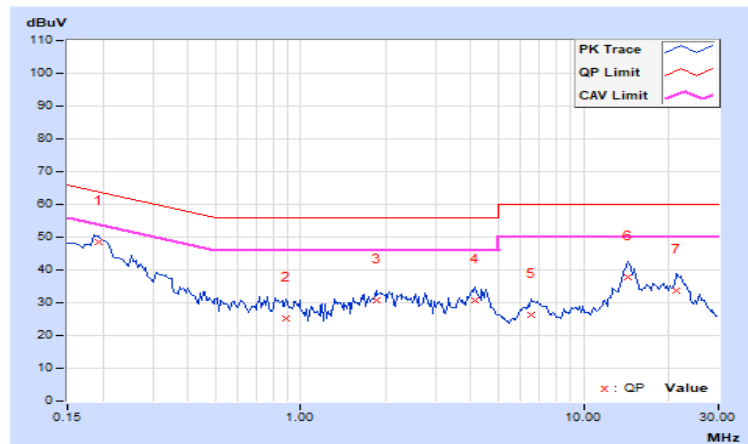

7.8 Unwanted Emissions below 1 GHz

Indoor client

Mode A


2Tx NSS2

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	69.12	21.2 PK	40.0	-18.8	1.00 H	0	36.4	-15.2
2	99.67	29.2 PK	43.5	-14.3	2.00 H	61	46.3	-17.1
3	132.80	35.9 PK	43.5	-7.6	1.00 H	0	49.5	-13.6
4	199.29	32.7 PK	43.5	-10.8	2.00 H	360	48.5	-15.8
5	276.82	30.9 PK	46.0	-15.1	1.00 H	67	43.6	-12.7
6	331.94	32.1 PK	46.0	-13.9	1.00 H	277	42.9	-10.8
7	398.87	30.8 PK	46.0	-15.2	1.00 H	338	40.2	-9.4
8	473.68	30.8 PK	46.0	-15.2	2.00 H	84	38.4	-7.6
9	886.73	31.9 PK	46.0	-14.1	2.00 H	360	32.5	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

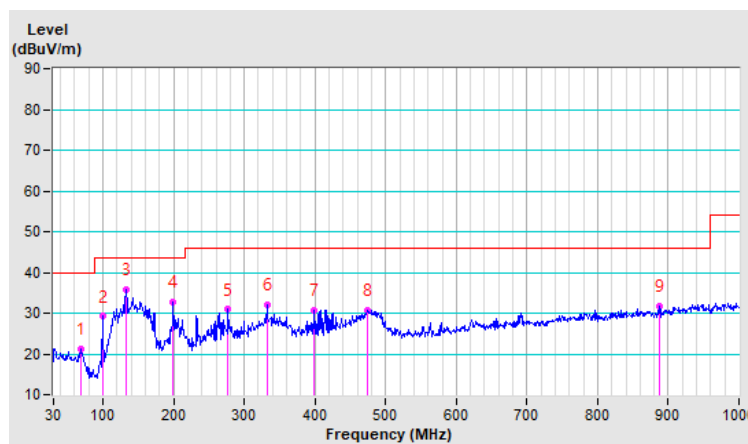


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.02	23.8 PK	40.0	-16.2	1.00 V	257	37.4	-13.6
2	69.16	27.5 PK	40.0	-12.5	1.00 V	0	42.7	-15.2
3	99.72	26.7 PK	43.5	-16.8	2.00 V	232	43.8	-17.1
4	154.48	27.3 PK	43.5	-16.2	2.00 V	319	39.8	-12.5
5	199.22	24.9 PK	43.5	-18.6	2.00 V	319	40.7	-15.8
6	298.91	29.7 PK	46.0	-16.3	3.00 V	360	41.6	-11.9
7	349.08	29.1 PK	46.0	-16.9	2.00 V	329	39.8	-10.7
8	460.92	28.1 PK	46.0	-17.9	1.00 V	0	35.9	-7.8
9	644.37	30.5 PK	46.0	-15.5	1.00 V	360	34.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

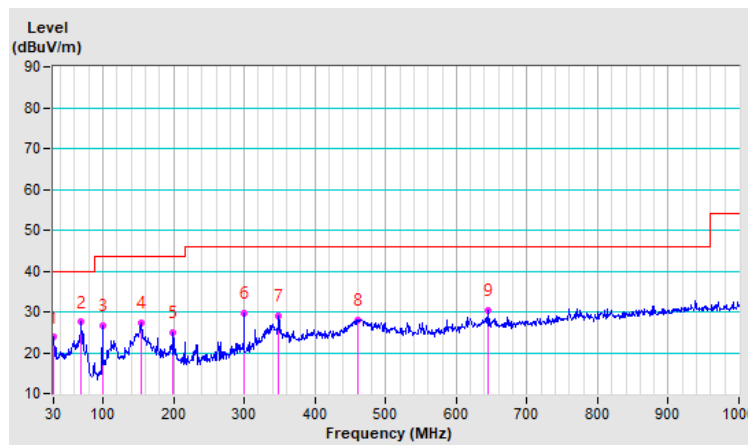

Mode B


2Tx NSS2

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.83	27.1 PK	40.0	-12.9	2.00 H	0	41.1	-14.0
2	99.79	24.7 PK	43.5	-18.8	2.00 H	250	41.8	-17.1
3	132.80	29.0 PK	43.5	-14.5	2.00 H	278	42.6	-13.6
4	199.53	26.8 PK	43.5	-16.7	1.00 H	360	42.6	-15.8
5	232.78	25.9 PK	46.0	-20.1	1.00 H	203	40.6	-14.7
6	331.99	34.5 PK	46.0	-11.5	2.00 H	0	45.3	-10.8
7	465.75	31.4 PK	46.0	-14.6	1.00 H	49	39.2	-7.8
8	551.86	33.7 PK	46.0	-12.3	1.00 H	207	39.9	-6.2
9	623.32	36.0 PK	46.0	-10.0	1.00 H	344	40.5	-4.5
10	859.08	34.7 PK	46.0	-11.3	2.00 H	0	35.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

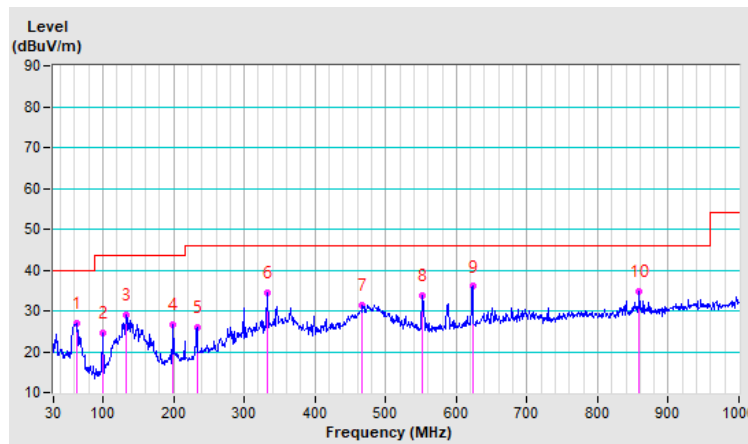


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.05	24.0 PK	40.0	-16.0	1.00 V	360	37.6	-13.6
2	68.65	26.5 PK	40.0	-13.5	1.00 V	0	41.6	-15.1
3	132.72	26.2 PK	43.5	-17.3	3.00 V	119	39.8	-13.6
4	199.53	22.3 PK	43.5	-21.2	1.00 V	196	38.1	-15.8
5	317.07	26.5 PK	46.0	-19.5	2.00 V	245	37.6	-11.1
6	374.08	28.2 PK	46.0	-17.8	2.00 V	161	38.3	-10.1
7	487.82	28.0 PK	46.0	-18.0	1.00 V	222	35.4	-7.4
8	930.60	34.2 PK	46.0	-11.8	1.00 V	240	33.8	0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

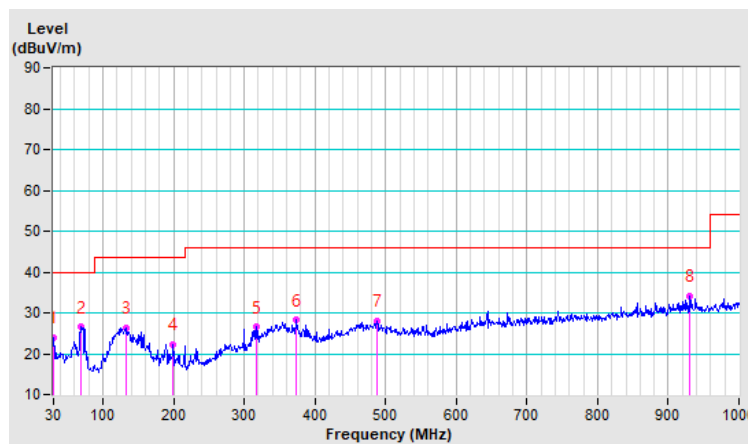

Mode C


2Tx NSS2

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.95	22.7 PK	40.0	-17.3	1.00 H	129	36.3	-13.6
2	132.80	37.2 PK	43.5	-6.3	2.00 H	0	50.8	-13.6
3	150.01	32.8 PK	43.5	-10.7	2.00 H	0	45.3	-12.5
4	205.47	30.8 PK	43.5	-12.7	1.00 H	355	46.7	-15.9
5	297.70	32.1 PK	46.0	-13.9	1.00 H	248	44.1	-12.0
6	346.54	32.0 PK	46.0	-14.0	1.00 H	360	42.7	-10.7
7	406.14	32.3 PK	46.0	-13.7	3.00 H	138	41.6	-9.3
8	705.85	33.2 PK	46.0	-12.8	1.00 H	126	36.6	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

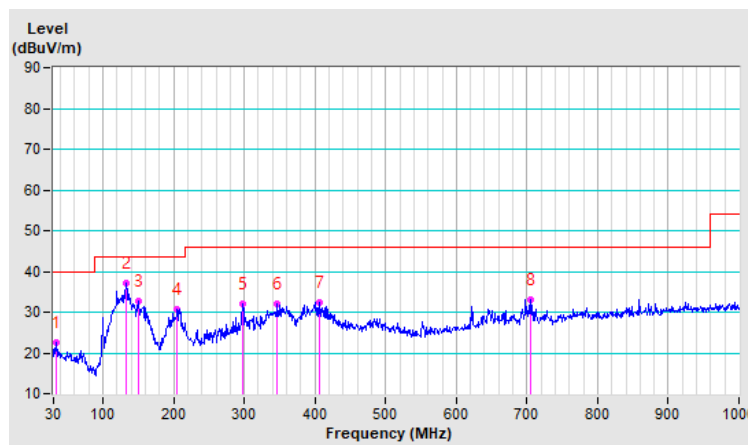


RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.33	27.3 PK	40.0	-12.7	1.00 V	0	42.7	-15.4
2	119.72	28.4 PK	43.5	-15.1	3.00 V	271	43.0	-14.6
3	155.20	26.1 PK	43.5	-17.4	2.00 V	293	38.6	-12.5
4	351.72	29.6 PK	46.0	-16.4	1.00 V	0	40.3	-10.7
5	474.77	30.3 PK	46.0	-15.7	1.00 V	213	37.9	-7.6
6	698.33	31.7 PK	46.0	-14.3	1.00 V	0	35.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

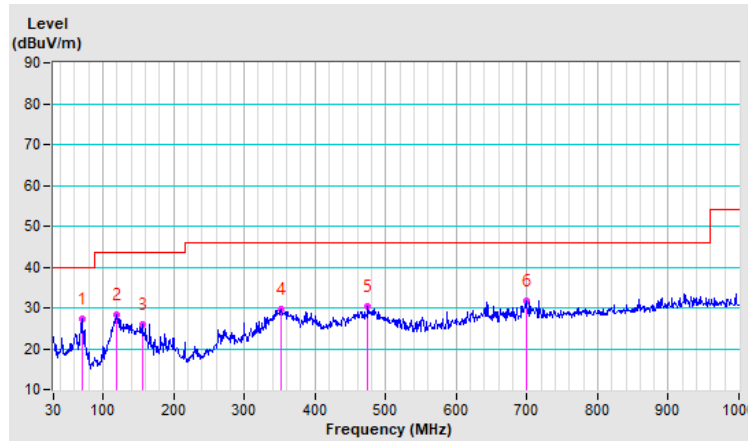

Standard client

Mode A


2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.85	21.6 PK	40.0	-18.4	1.00 H	328	35.5	-13.9
2	132.92	35.8 PK	43.5	-7.7	3.00 H	168	49.4	-13.6
3	199.51	29.7 PK	43.5	-13.8	1.00 H	320	45.5	-15.8
4	262.65	28.8 PK	46.0	-17.2	2.00 H	0	42.3	-13.5
5	299.20	38.8 PK	46.0	-7.2	1.00 H	202	50.7	-11.9
6	418.19	30.0 PK	46.0	-16.0	1.00 H	2	38.8	-8.8
7	478.53	30.8 PK	46.0	-15.2	2.00 H	59	38.3	-7.5
8	690.89	29.8 PK	46.0	-16.2	1.00 H	78	33.5	-3.7
9	855.45	32.5 PK	46.0	-13.5	1.00 H	309	33.6	-1.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

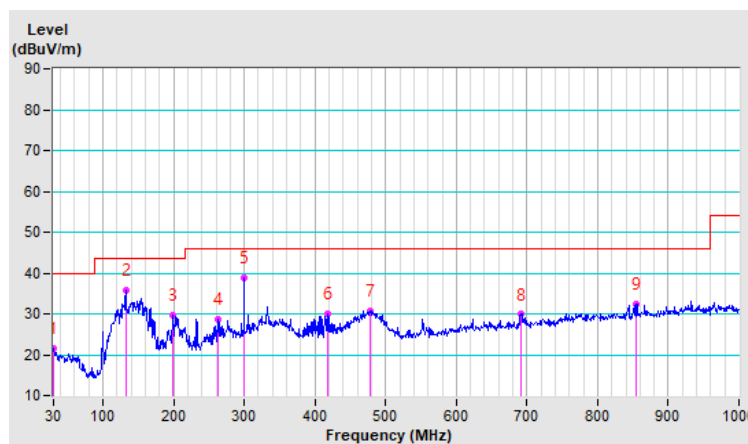


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.41	28.3 PK	40.0	-11.7	1.00 V	146	42.0	-13.7
2	49.21	26.1 PK	40.0	-13.9	1.00 V	216	39.0	-12.9
3	83.45	27.4 PK	40.0	-12.6	1.00 V	233	45.7	-18.3
4	155.91	26.2 PK	43.5	-17.3	1.00 V	32	38.8	-12.6
5	178.17	27.9 PK	43.5	-15.6	1.00 V	276	41.8	-13.9
6	245.51	25.6 PK	46.0	-20.4	1.00 V	230	39.5	-13.9
7	298.84	30.2 PK	46.0	-15.8	2.00 V	242	42.1	-11.9
8	644.35	29.6 PK	46.0	-16.4	2.00 V	122	33.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

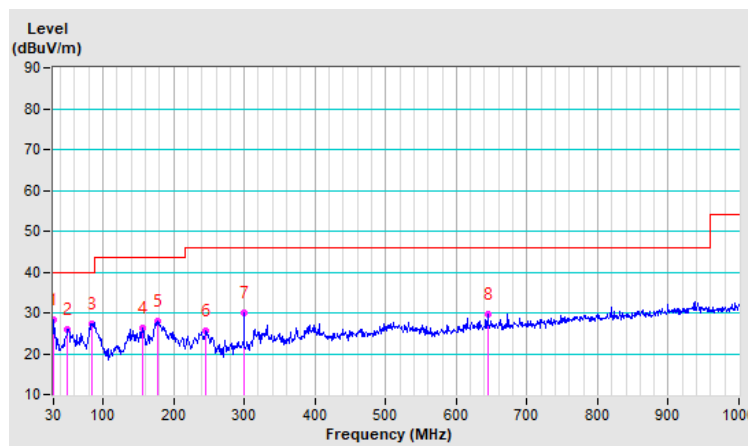

Mode B


2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	69.07	24.0 PK	40.0	-16.0	1.00 H	0	39.2	-15.2
2	99.60	36.2 PK	43.5	-7.3	3.00 H	318	53.3	-17.1
3	132.99	37.1 PK	43.5	-6.4	3.00 H	360	50.7	-13.6
4	199.46	30.4 PK	43.5	-13.1	2.00 H	92	46.2	-15.8
5	358.15	32.6 PK	46.0	-13.4	1.00 H	0	42.9	-10.3
6	470.72	30.6 PK	46.0	-15.4	2.00 H	88	38.3	-7.7
7	554.07	29.4 PK	46.0	-16.6	2.00 H	286	35.6	-6.2
8	700.37	31.9 PK	46.0	-14.1	2.00 H	111	35.3	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

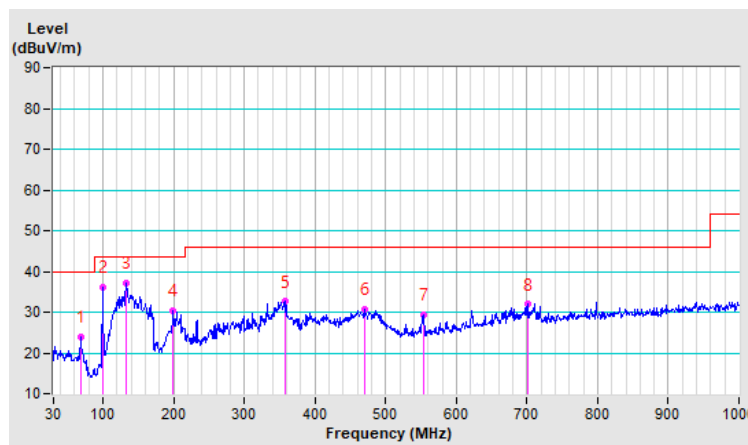


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.05	22.9 PK	40.0	-17.1	1.00 V	360	36.5	-13.6
2	63.17	25.1 PK	40.0	-14.9	2.00 V	0	39.1	-14.0
3	121.18	27.4 PK	43.5	-16.1	3.00 V	255	41.9	-14.5
4	189.73	23.4 PK	43.5	-20.1	2.00 V	90	38.7	-15.3
5	336.98	26.9 PK	46.0	-19.1	2.00 V	0	37.7	-10.8
6	458.84	28.1 PK	46.0	-17.9	2.00 V	0	36.1	-8.0
7	940.37	34.6 PK	46.0	-11.4	1.00 V	236	34.1	0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

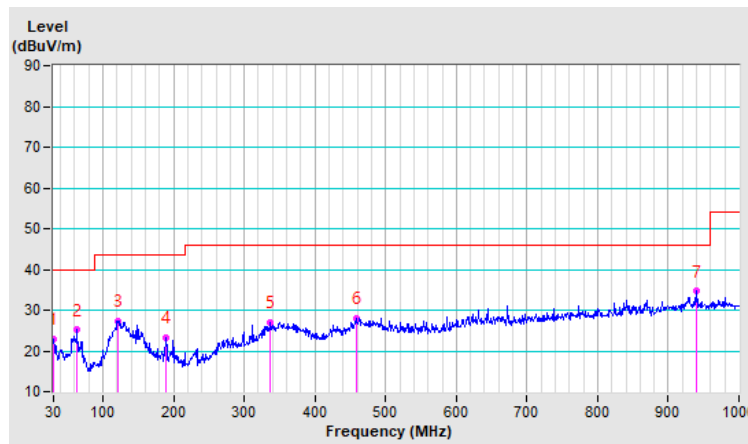

Mode C


2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.95	28.0 PK	40.0	-12.0	1.00 H	194	41.6	-13.6
2	60.34	26.7 PK	40.0	-13.3	2.00 H	0	40.3	-13.6
3	132.97	29.2 PK	43.5	-14.3	2.00 H	99	42.8	-13.6
4	331.94	35.1 PK	46.0	-10.9	2.00 H	0	45.9	-10.8
5	483.48	32.6 PK	46.0	-13.4	1.00 H	360	40.1	-7.5
6	551.96	35.1 PK	46.0	-10.9	1.00 H	89	41.3	-6.2
7	965.78	35.9 PK	54.0	-18.1	1.00 H	141	35.2	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

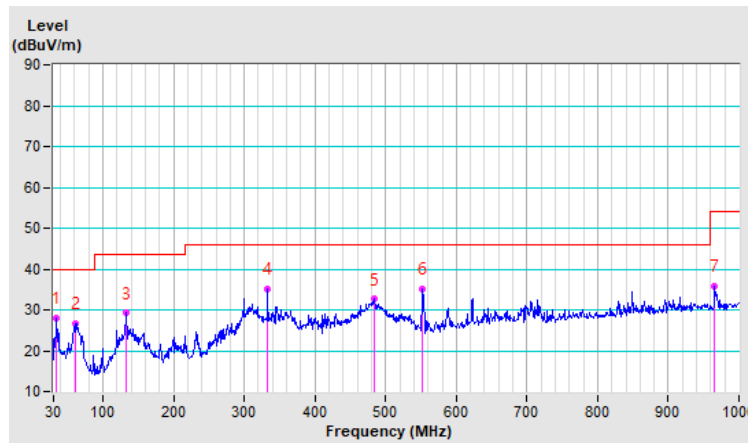


RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	23.5 PK	40.0	-16.5	2.00 V	0	37.1	-13.6
2	63.97	24.6 PK	40.0	-15.4	2.00 V	0	38.6	-14.0
3	122.22	27.4 PK	43.5	-16.1	3.00 V	308	41.8	-14.4
4	298.86	34.0 PK	46.0	-12.0	2.00 V	276	45.9	-11.9
5	354.49	30.4 PK	46.0	-15.6	2.00 V	0	41.0	-10.6
6	464.66	30.4 PK	46.0	-15.6	1.00 V	212	38.2	-7.8
7	641.25	31.1 PK	46.0	-14.9	2.00 V	0	35.1	-4.0
8	703.76	34.0 PK	46.0	-12.0	1.00 V	188	37.4	-3.4
9	917.43	34.7 PK	46.0	-11.3	2.00 V	0	34.7	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

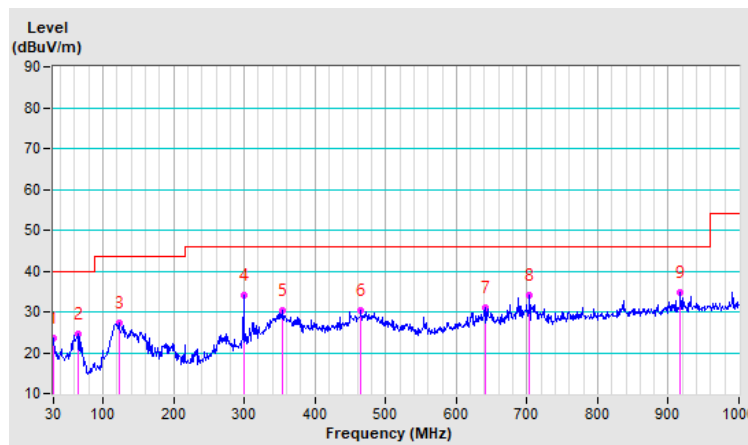

7.9 Unwanted Emissions above 1 GHz

Indoor client

Mode A

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.5 PK	88.2	-20.7	2.15 H	159	63.2	4.3
2	#5925.00	54.4 AV	68.2	-13.8	2.15 H	159	50.1	4.3
3	*5955.00	113.4 PK			2.15 H	159	108.9	4.5
4	*5955.00	104.1 AV			2.15 H	159	99.6	4.5
5	11910.00	50.3 PK	74.0	-23.7	3.84 H	347	38.1	12.2
6	11910.00	38.6 AV	54.0	-15.4	3.84 H	347	26.4	12.2
7	17865.00	56.1 PK	74.0	-17.9	3.99 H	249	34.2	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.99 H	249	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	1.47 V	200	68.5	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.47 V	200	53.1	4.3
3	*5955.00	114.1 PK			1.47 V	200	109.6	4.5
4	*5955.00	105.1 AV			1.47 V	200	100.6	4.5
5	11910.00	50.3 PK	74.0	-23.7	3.26 V	337	38.1	12.2
6	11910.00	37.9 AV	54.0	-16.1	3.26 V	337	25.7	12.2
7	17865.00	55.4 PK	74.0	-18.6	3.51 V	120	33.5	21.9
8	17865.00	43.1 AV	54.0	-10.9	3.51 V	120	21.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.4 PK			2.16 H	155	108.6	4.8
2	*6195.00	104.2 AV			2.16 H	155	99.4	4.8
3	12390.00	50.3 PK	74.0	-23.7	3.84 H	347	38.0	12.3
4	12390.00	38.6 AV	54.0	-15.4	3.84 H	347	26.3	12.3
5	18585.00	56.1 PK	74.0	-17.9	3.99 H	249	61.1	-5.0
6	18585.00	44.2 AV	54.0	-9.8	3.99 H	249	49.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.1 PK			1.47 V	200	109.3	4.8
2	*6195.00	105.1 AV			1.47 V	200	100.3	4.8
3	12390.00	49.8 PK	74.0	-24.2	3.25 V	337	37.5	12.3
4	12390.00	37.5 AV	54.0	-16.5	3.25 V	337	25.2	12.3
5	18585.00	55.3 PK	74.0	-18.7	3.46 V	125	60.3	-5.0
6	18585.00	42.9 AV	54.0	-11.1	3.46 V	125	47.9	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.5 PK			2.21 H	154	107.1	6.4
2	*6415.00	104.1 AV			2.21 H	154	97.7	6.4
3	#12830.00	50.3 PK	88.2	-37.9	3.84 H	347	37.3	13.0
4	#12830.00	38.6 AV	68.2	-29.6	3.84 H	347	25.6	13.0
5	19245.00	56.1 PK	74.0	-17.9	3.99 H	249	59.9	-3.8
6	19245.00	44.2 AV	54.0	-9.8	3.99 H	249	48.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.1 PK			1.47 V	200	107.7	6.4
2	*6415.00	105.1 AV			1.47 V	200	98.7	6.4
3	#12830.00	49.9 PK	88.2	-38.3	3.20 V	324	36.9	13.0
4	#12830.00	37.6 AV	68.2	-30.6	3.20 V	324	24.6	13.0
5	19245.00	55.4 PK	74.0	-18.6	3.54 V	135	59.2	-3.8
6	19245.00	43.0 AV	54.0	-11.0	3.54 V	135	46.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.4 PK			1.02 H	110	94.0	6.4
2	*6435.00	91.7 AV			1.02 H	110	85.3	6.4
3	#12870.00	51.0 PK	88.2	-37.2	3.80 H	350	38.0	13.0
4	#12870.00	39.1 AV	68.2	-29.1	3.80 H	350	26.1	13.0
5	19305.00	56.4 PK	74.0	-17.6	3.99 H	250	60.1	-3.7
6	19305.00	44.6 AV	54.0	-9.4	3.99 H	250	48.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.4 PK			2.11 V	177	95.0	6.4
2	*6435.00	91.9 AV			2.11 V	177	85.5	6.4
3	#12870.00	50.1 PK	88.2	-38.1	3.31 V	328	37.1	13.0
4	#12870.00	37.7 AV	68.2	-30.5	3.31 V	328	24.7	13.0
5	19305.00	55.9 PK	74.0	-18.1	3.56 V	128	59.6	-3.7
6	19305.00	43.6 AV	54.0	-10.4	3.56 V	128	47.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	113.6 PK			2.13 H	151	107.0	6.6
2	*6475.00	104.3 AV			2.13 H	151	97.7	6.6
3	#12950.00	50.3 PK	88.2	-37.9	3.84 H	347	37.2	13.1
4	#12950.00	38.6 AV	68.2	-29.6	3.84 H	347	25.5	13.1
5	19425.00	56.1 PK	74.0	-17.9	3.99 H	249	59.9	-3.8
6	19425.00	44.2 AV	54.0	-9.8	3.99 H	249	48.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.1 PK			1.47 V	200	107.5	6.6
2	*6475.00	105.1 AV			1.47 V	200	98.5	6.6
3	#12950.00	49.8 PK	88.2	-38.4	3.30 V	335	36.7	13.1
4	#12950.00	37.6 AV	68.2	-30.6	3.30 V	335	24.5	13.1
5	19425.00	54.8 PK	74.0	-19.2	3.55 V	112	58.6	-3.8
6	19425.00	42.6 AV	54.0	-11.4	3.55 V	112	46.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.2 PK			1.05 H	107	93.3	6.9
2	*6515.00	91.7 AV			1.05 H	107	84.8	6.9
3	#13030.00	50.6 PK	88.2	-37.6	3.77 H	360	37.4	13.2
4	#13030.00	38.8 AV	68.2	-29.4	3.77 H	360	25.6	13.2
5	19545.00	56.2 PK	74.0	-17.8	4.00 H	242	60.3	-4.1
6	19545.00	44.2 AV	54.0	-9.8	4.00 H	242	48.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.2 PK			2.00 V	179	94.3	6.9
2	*6515.00	91.5 AV			2.00 V	179	84.6	6.9
3	#13030.00	50.1 PK	88.2	-38.1	3.25 V	337	36.9	13.2
4	#13030.00	37.7 AV	68.2	-30.5	3.25 V	337	24.5	13.2
5	19545.00	56.5 PK	74.0	-17.5	3.54 V	130	60.6	-4.1
6	19545.00	43.9 AV	54.0	-10.1	3.54 V	130	48.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.0 PK			2.09 H	174	107.1	6.9
2	*6535.00	104.6 AV			2.09 H	174	97.7	6.9
3	#13070.00	50.3 PK	88.2	-37.9	3.84 H	347	37.1	13.2
4	#13070.00	38.6 AV	68.2	-29.6	3.84 H	347	25.4	13.2
5	19605.00	56.1 PK	74.0	-17.9	3.99 H	249	60.1	-4.0
6	19605.00	44.2 AV	54.0	-9.8	3.99 H	249	48.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.1 PK			1.47 V	200	107.2	6.9
2	*6535.00	105.1 AV			1.47 V	200	98.2	6.9
3	#13070.00	51.1 PK	88.2	-37.1	3.22 V	339	37.9	13.2
4	#13070.00	38.4 AV	68.2	-29.8	3.22 V	339	25.2	13.2
5	19605.00	55.0 PK	74.0	-19.0	3.53 V	120	59.0	-4.0
6	19605.00	42.7 AV	54.0	-11.3	3.53 V	120	46.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.0 PK			2.13 H	157	106.8	7.2
2	*6695.00	104.5 AV			2.13 H	157	97.3	7.2
3	13390.00	50.3 PK	74.0	-23.7	3.84 H	347	36.3	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.84 H	347	24.6	14.0
5	20085.00	56.1 PK	74.0	-17.9	3.99 H	249	59.6	-3.5
6	20085.00	44.2 AV	54.0	-9.8	3.99 H	249	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.1 PK			1.47 V	200	106.9	7.2
2	*6695.00	105.1 AV			1.47 V	200	97.9	7.2
3	13390.00	50.3 PK	74.0	-23.7	3.29 V	337	36.3	14.0
4	13390.00	38.1 AV	54.0	-15.9	3.29 V	337	24.1	14.0
5	20085.00	55.7 PK	74.0	-18.3	3.51 V	124	59.2	-3.5
6	20085.00	43.1 AV	54.0	-10.9	3.51 V	124	46.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.6 PK			2.11 H	163	106.4	7.2
2	*6855.00	104.6 AV			2.11 H	163	97.4	7.2
3	#13710.00	50.3 PK	88.2	-37.9	3.84 H	347	35.1	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.84 H	347	23.4	15.2
5	20565.00	56.1 PK	74.0	-17.9	3.99 H	249	59.4	-3.3
6	20565.00	44.2 AV	54.0	-9.8	3.99 H	249	47.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.1 PK			1.47 V	200	106.9	7.2
2	*6855.00	105.1 AV			1.47 V	200	97.9	7.2
3	#13710.00	49.6 PK	88.2	-38.6	3.29 V	341	34.4	15.2
4	#13710.00	37.5 AV	68.2	-30.7	3.29 V	341	22.3	15.2
5	20565.00	55.4 PK	74.0	-18.6	3.52 V	109	58.7	-3.3
6	20565.00	42.8 AV	54.0	-11.2	3.52 V	109	46.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.6 PK			1.06 H	108	92.4	7.2
2	*6875.00	91.1 AV			1.06 H	108	83.9	7.2
3	#13750.00	50.7 PK	88.2	-37.5	3.76 H	351	35.6	15.1
4	#13750.00	38.6 AV	68.2	-29.6	3.76 H	351	23.5	15.1
5	20625.00	56.3 PK	74.0	-17.7	4.00 H	238	59.6	-3.3
6	20625.00	44.3 AV	54.0	-9.7	4.00 H	238	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.1 PK			2.09 V	178	93.9	7.2
2	*6875.00	91.5 AV			2.09 V	178	84.3	7.2
3	#13750.00	50.4 PK	88.2	-37.8	3.31 V	325	35.3	15.1
4	#13750.00	37.8 AV	68.2	-30.4	3.31 V	325	22.7	15.1
5	20625.00	56.5 PK	74.0	-17.5	3.61 V	129	59.8	-3.3
6	20625.00	44.0 AV	54.0	-10.0	3.61 V	129	47.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.8 PK			1.00 H	126	91.8	8.0
2	*6995.00	91.5 AV			1.00 H	126	83.5	8.0
3	#13990.00	50.4 PK	88.2	-37.8	3.83 H	339	34.8	15.6
4	#13990.00	38.7 AV	68.2	-29.5	3.83 H	339	23.1	15.6
5	20985.00	56.5 PK	74.0	-17.5	4.00 H	240	59.3	-2.8
6	20985.00	44.8 AV	54.0	-9.2	4.00 H	240	47.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.1 PK			2.01 V	175	92.1	8.0
2	*6995.00	91.3 AV			2.01 V	175	83.3	8.0
3	#13990.00	50.1 PK	88.2	-38.1	3.29 V	328	34.5	15.6
4	#13990.00	37.9 AV	68.2	-30.3	3.29 V	328	22.3	15.6
5	20985.00	55.8 PK	74.0	-18.2	3.51 V	122	58.6	-2.8
6	20985.00	43.3 AV	54.0	-10.7	3.51 V	122	46.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			1.00 H	114	90.4	9.5
2	*7115.00	91.4 AV			1.00 H	114	81.9	9.5
3	#7125.00	81.3 PK	88.2	-6.9	1.00 H	114	71.9	9.4
4	#7125.00	61.7 AV	68.2	-6.5	1.00 H	114	52.3	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.00 H	114	46.7	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.00 H	114	34.8	8.7
7	#14230.00	51.5 PK	88.2	-36.7	3.78 H	344	36.2	15.3
8	#14230.00	39.5 AV	68.2	-28.7	3.78 H	344	24.2	15.3
9	21345.00	56.7 PK	74.0	-17.3	4.00 H	253	58.3	-1.6
10	21345.00	44.7 AV	54.0	-9.3	4.00 H	253	46.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			1.43 V	200	91.5	9.5
2	*7115.00	91.8 AV			1.43 V	200	82.3	9.5
3	#7125.00	78.6 PK	88.2	-9.6	1.43 V	200	69.2	9.4
4	#7125.00	61.6 AV	68.2	-6.6	1.43 V	200	52.2	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.43 V	200	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.43 V	200	34.7	8.7
7	#14230.00	49.9 PK	88.2	-38.3	3.26 V	341	34.6	15.3
8	#14230.00	37.6 AV	68.2	-30.6	3.26 V	341	22.3	15.3
9	21345.00	56.4 PK	74.0	-17.6	3.55 V	124	58.0	-1.6
10	21345.00	44.0 AV	54.0	-10.0	3.55 V	124	45.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1Tx NSS1

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.4 PK	88.2	-19.8	2.23 H	131	64.1	4.3
2	#5925.00	56.7 AV	68.2	-11.5	2.23 H	131	52.4	4.3
3	*5955.00	114.6 PK			2.23 H	131	110.1	4.5
4	*5955.00	103.4 AV			2.23 H	131	98.9	4.5
5	11910.00	50.6 PK	74.0	-23.4	3.82 H	352	38.4	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.82 H	352	26.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.94 H	251	34.4	21.9
8	17865.00	44.6 AV	54.0	-9.4	3.94 H	251	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.2 PK	88.2	-18.0	2.02 V	176	65.9	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.02 V	176	55.6	4.3
3	*5955.00	116.3 PK			2.02 V	176	111.8	4.5
4	*5955.00	105.3 AV			2.02 V	176	100.8	4.5
5	11910.00	49.4 PK	74.0	-24.6	3.30 V	342	37.2	12.2
6	11910.00	37.3 AV	54.0	-16.7	3.30 V	342	25.1	12.2
7	17865.00	55.7 PK	74.0	-18.3	3.54 V	104	33.8	21.9
8	17865.00	43.1 AV	54.0	-10.9	3.54 V	104	21.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.4 PK			2.27 H	131	109.6	4.8
2	*6195.00	103.5 AV			2.27 H	131	98.7	4.8
3	12390.00	51.0 PK	74.0	-23.0	3.89 H	360	38.7	12.3
4	12390.00	39.0 AV	54.0	-15.0	3.89 H	360	26.7	12.3
5	18585.00	55.6 PK	74.0	-18.4	3.98 H	262	60.6	-5.0
6	18585.00	43.7 AV	54.0	-10.3	3.98 H	262	48.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			2.08 V	173	111.8	4.8
2	*6195.00	105.6 AV			2.08 V	173	100.8	4.8
3	12390.00	50.0 PK	74.0	-24.0	3.33 V	335	37.7	12.3
4	12390.00	37.8 AV	54.0	-16.2	3.33 V	335	25.5	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.57 V	95	60.2	-5.0
6	18585.00	42.7 AV	54.0	-11.3	3.57 V	95	47.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.7 PK			2.22 H	127	108.3	6.4
2	*6415.00	103.6 AV			2.22 H	127	97.2	6.4
3	#12830.00	50.8 PK	88.2	-37.4	3.86 H	344	37.8	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.86 H	344	25.8	13.0
5	19245.00	55.8 PK	74.0	-18.2	4.00 H	254	59.6	-3.8
6	19245.00	43.9 AV	54.0	-10.1	4.00 H	254	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.2 PK			2.02 V	186	109.8	6.4
2	*6415.00	105.0 AV			2.02 V	186	98.6	6.4
3	#12830.00	49.7 PK	88.2	-38.5	3.28 V	334	36.7	13.0
4	#12830.00	37.6 AV	68.2	-30.6	3.28 V	334	24.6	13.0
5	19245.00	55.9 PK	74.0	-18.1	3.55 V	100	59.7	-3.8
6	19245.00	43.0 AV	54.0	-11.0	3.55 V	100	46.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.7 PK			1.00 H	141	95.3	6.4
2	*6435.00	90.8 AV			1.00 H	141	84.4	6.4
3	#12870.00	51.5 PK	88.2	-36.7	3.78 H	345	38.5	13.0
4	#12870.00	39.6 AV	68.2	-28.6	3.78 H	345	26.6	13.0
5	19305.00	56.6 PK	74.0	-17.4	3.96 H	257	60.3	-3.7
6	19305.00	44.6 AV	54.0	-9.4	3.96 H	257	48.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.9 PK			2.15 V	185	95.5	6.4
2	*6435.00	91.1 AV			2.15 V	185	84.7	6.4
3	#12870.00	50.4 PK	88.2	-37.8	3.36 V	321	37.4	13.0
4	#12870.00	37.7 AV	68.2	-30.5	3.36 V	321	24.7	13.0
5	19305.00	56.6 PK	74.0	-17.4	3.57 V	141	60.3	-3.7
6	19305.00	44.1 AV	54.0	-9.9	3.57 V	141	47.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.7 PK			2.28 H	145	108.1	6.6
2	*6475.00	103.5 AV			2.28 H	145	96.9	6.6
3	#12950.00	50.4 PK	88.2	-37.8	3.79 H	360	37.3	13.1
4	#12950.00	38.5 AV	68.2	-29.7	3.79 H	360	25.4	13.1
5	19425.00	56.6 PK	74.0	-17.4	4.00 H	255	60.4	-3.8
6	19425.00	44.4 AV	54.0	-9.6	4.00 H	255	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.6 PK			1.97 V	161	110.0	6.6
2	*6475.00	105.7 AV			1.97 V	161	99.1	6.6
3	#12950.00	49.3 PK	88.2	-38.9	3.23 V	332	36.2	13.1
4	#12950.00	37.2 AV	68.2	-31.0	3.23 V	332	24.1	13.1
5	19425.00	56.2 PK	74.0	-17.8	3.56 V	112	60.0	-3.8
6	19425.00	43.3 AV	54.0	-10.7	3.56 V	112	47.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.6 PK			1.00 H	129	94.7	6.9
2	*6515.00	90.9 AV			1.00 H	129	84.0	6.9
3	#13030.00	51.1 PK	88.2	-37.1	3.79 H	340	37.9	13.2
4	#13030.00	39.2 AV	68.2	-29.0	3.79 H	340	26.0	13.2
5	19545.00	56.6 PK	74.0	-17.4	3.95 H	258	60.7	-4.1
6	19545.00	44.7 AV	54.0	-9.3	3.95 H	258	48.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.6 PK			2.11 V	189	94.7	6.9
2	*6515.00	90.8 AV			2.11 V	189	83.9	6.9
3	#13030.00	49.8 PK	88.2	-38.4	3.32 V	316	36.6	13.2
4	#13030.00	37.4 AV	68.2	-30.8	3.32 V	316	24.2	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.60 V	141	60.8	-4.1
6	19545.00	44.1 AV	54.0	-9.9	3.60 V	141	48.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.1 PK			2.21 H	146	107.2	6.9
2	*6535.00	103.0 AV			2.21 H	146	96.1	6.9
3	#13070.00	49.9 PK	88.2	-38.3	3.81 H	337	36.7	13.2
4	#13070.00	38.2 AV	68.2	-30.0	3.81 H	337	25.0	13.2
5	19605.00	56.3 PK	74.0	-17.7	4.00 H	245	60.3	-4.0
6	19605.00	44.5 AV	54.0	-9.5	4.00 H	245	48.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.9 PK			2.06 V	177	110.0	6.9
2	*6535.00	105.7 AV			2.06 V	177	98.8	6.9
3	#13070.00	50.1 PK	88.2	-38.1	3.25 V	338	36.9	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.25 V	338	24.7	13.2
5	19605.00	55.8 PK	74.0	-18.2	3.50 V	103	59.8	-4.0
6	19605.00	43.1 AV	54.0	-10.9	3.50 V	103	47.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.6 PK			2.17 H	118	107.4	7.2
2	*6695.00	103.6 AV			2.17 H	118	96.4	7.2
3	13390.00	50.5 PK	74.0	-23.5	3.87 H	341	36.5	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.87 H	341	24.6	14.0
5	20085.00	56.1 PK	74.0	-17.9	4.00 H	254	59.6	-3.5
6	20085.00	44.4 AV	54.0	-9.6	4.00 H	254	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.1 PK			1.97 V	184	109.9	7.2
2	*6695.00	105.8 AV			1.97 V	184	98.6	7.2
3	13390.00	49.3 PK	74.0	-24.7	3.35 V	331	35.3	14.0
4	13390.00	37.4 AV	54.0	-16.6	3.35 V	331	23.4	14.0
5	20085.00	55.2 PK	74.0	-18.8	3.50 V	94	58.7	-3.5
6	20085.00	42.8 AV	54.0	-11.2	3.50 V	94	46.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.9 PK			2.26 H	115	106.7	7.2
2	*6855.00	103.0 AV			2.26 H	115	95.8	7.2
3	#13710.00	50.3 PK	88.2	-37.9	3.82 H	360	35.1	15.2
4	#13710.00	38.7 AV	68.2	-29.5	3.82 H	360	23.5	15.2
5	20565.00	56.6 PK	74.0	-17.4	3.95 H	258	59.9	-3.3
6	20565.00	44.5 AV	54.0	-9.5	3.95 H	258	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.9 PK			1.96 V	185	109.7	7.2
2	*6855.00	105.8 AV			1.96 V	185	98.6	7.2
3	#13710.00	49.7 PK	88.2	-38.5	3.34 V	352	34.5	15.2
4	#13710.00	37.3 AV	68.2	-30.9	3.34 V	352	22.1	15.2
5	20565.00	55.5 PK	74.0	-18.5	3.56 V	123	58.8	-3.3
6	20565.00	42.6 AV	54.0	-11.4	3.56 V	123	45.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.9 PK			1.03 H	119	93.7	7.2
2	*6875.00	90.5 AV			1.03 H	119	83.3	7.2
3	#13750.00	51.0 PK	88.2	-37.2	3.77 H	352	35.9	15.1
4	#13750.00	39.0 AV	68.2	-29.2	3.77 H	352	23.9	15.1
5	20625.00	56.5 PK	74.0	-17.5	4.00 H	243	59.8	-3.3
6	20625.00	44.6 AV	54.0	-9.4	4.00 H	243	47.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.1 PK			2.06 V	179	94.9	7.2
2	*6875.00	91.4 AV			2.06 V	179	84.2	7.2
3	#13750.00	50.5 PK	88.2	-37.7	3.30 V	327	35.4	15.1
4	#13750.00	38.2 AV	68.2	-30.0	3.30 V	327	23.1	15.1
5	20625.00	55.8 PK	74.0	-18.2	3.51 V	136	59.1	-3.3
6	20625.00	43.3 AV	54.0	-10.7	3.51 V	136	46.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.5 PK			1.00 H	120	93.5	8.0
2	*6995.00	90.8 AV			1.00 H	120	82.8	8.0
3	#13990.00	51.2 PK	88.2	-37.0	3.83 H	341	35.6	15.6
4	#13990.00	39.1 AV	68.2	-29.1	3.83 H	341	23.5	15.6
5	20985.00	56.6 PK	74.0	-17.4	3.96 H	247	59.4	-2.8
6	20985.00	44.7 AV	54.0	-9.3	3.96 H	247	47.5	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.0 PK			2.07 V	177	94.0	8.0
2	*6995.00	91.2 AV			2.07 V	177	83.2	8.0
3	#13990.00	49.7 PK	88.2	-38.5	3.32 V	336	34.1	15.6
4	#13990.00	37.3 AV	68.2	-30.9	3.32 V	336	21.7	15.6
5	20985.00	55.5 PK	74.0	-18.5	3.58 V	130	58.3	-2.8
6	20985.00	43.3 AV	54.0	-10.7	3.58 V	130	46.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			1.00 H	114	91.8	9.5
2	*7115.00	90.9 AV			1.00 H	114	81.4	9.5
3	#7125.00	85.8 PK	88.2	-2.4	1.00 H	114	76.4	9.4
4	#7125.00	65.2 AV	68.2	-3.0	1.00 H	114	55.8	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.00 H	114	46.1	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.00 H	114	34.8	8.7
7	#14230.00	50.9 PK	88.2	-37.3	3.78 H	357	35.6	15.3
8	#14230.00	38.9 AV	68.2	-29.3	3.78 H	357	23.6	15.3
9	21345.00	56.5 PK	74.0	-17.5	4.00 H	256	58.1	-1.6
10	21345.00	44.9 AV	54.0	-9.1	4.00 H	256	46.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.4 PK			2.28 V	171	91.9	9.5
2	*7115.00	91.1 AV			2.28 V	171	81.6	9.5
3	#7125.00	86.4 PK	88.2	-1.8	2.28 V	171	77.0	9.4
4	#7125.00	65.4 AV	68.2	-2.8	2.28 V	171	56.0	9.4
5	7250.00	55.4 PK	74.0	-18.6	2.28 V	171	46.7	8.7
6	7250.00	43.4 AV	54.0	-10.6	2.28 V	171	34.7	8.7
7	#14230.00	50.1 PK	88.2	-38.1	3.27 V	328	34.8	15.3
8	#14230.00	38.0 AV	68.2	-30.2	3.27 V	328	22.7	15.3
9	21345.00	56.6 PK	74.0	-17.4	3.52 V	129	58.2	-1.6
10	21345.00	44.1 AV	54.0	-9.9	3.52 V	129	45.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	2.23 H	132	75.0	4.3
2	#5925.00	66.1 AV	68.2	-2.1	2.23 H	132	61.8	4.3
3	*5965.00	110.5 PK			2.23 H	132	106.1	4.4
4	*5965.00	98.6 AV			2.23 H	132	94.2	4.4
5	11930.00	50.6 PK	74.0	-23.4	3.88 H	360	38.5	12.1
6	11930.00	38.8 AV	54.0	-15.2	3.88 H	360	26.7	12.1
7	17895.00	56.9 PK	74.0	-17.1	3.92 H	272	34.6	22.3
8	17895.00	45.0 AV	54.0	-9.0	3.92 H	272	22.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.4 PK	88.2	-8.8	1.59 V	182	75.1	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.59 V	182	62.3	4.3
3	*5965.00	113.4 PK			1.59 V	182	109.0	4.4
4	*5965.00	100.5 AV			1.59 V	182	96.1	4.4
5	11930.00	50.1 PK	74.0	-23.9	3.37 V	336	38.0	12.1
6	11930.00	37.5 AV	54.0	-16.5	3.37 V	336	25.4	12.1
7	17895.00	55.5 PK	74.0	-18.5	3.60 V	123	33.2	22.3
8	17895.00	42.3 AV	54.0	-11.7	3.60 V	123	20.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	110.1 PK			2.18 H	134	105.2	4.9
2	*6205.00	98.1 AV			2.18 H	134	93.2	4.9
3	12410.00	50.6 PK	74.0	-23.4	3.88 H	348	38.3	12.3
4	12410.00	39.1 AV	54.0	-14.9	3.88 H	348	26.8	12.3
5	18615.00	56.6 PK	74.0	-17.4	3.98 H	267	61.5	-4.9
6	18615.00	44.7 AV	54.0	-9.3	3.98 H	267	49.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	113.1 PK			1.54 V	168	108.2	4.9
2	*6205.00	100.5 AV			1.54 V	168	95.6	4.9
3	12410.00	49.6 PK	74.0	-24.4	3.32 V	360	37.3	12.3
4	12410.00	37.5 AV	54.0	-16.5	3.32 V	360	25.2	12.3
5	18615.00	55.9 PK	74.0	-18.1	3.61 V	114	60.8	-4.9
6	18615.00	43.0 AV	54.0	-11.0	3.61 V	114	47.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.1 PK			2.27 H	130	103.7	6.4
2	*6405.00	98.2 AV			2.27 H	130	91.8	6.4
3	#12810.00	50.5 PK	88.2	-37.7	3.79 H	352	37.7	12.8
4	#12810.00	38.6 AV	68.2	-29.6	3.79 H	352	25.8	12.8
5	19215.00	57.0 PK	74.0	-17.0	3.95 H	260	60.7	-3.7
6	19215.00	45.0 AV	54.0	-9.0	3.95 H	260	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.6 PK			1.65 V	188	106.2	6.4
2	*6405.00	100.0 AV			1.65 V	188	93.6	6.4
3	#12810.00	49.5 PK	88.2	-38.7	3.34 V	345	36.7	12.8
4	#12810.00	37.1 AV	68.2	-31.1	3.34 V	345	24.3	12.8
5	19215.00	55.6 PK	74.0	-18.4	3.57 V	122	59.3	-3.7
6	19215.00	42.8 AV	54.0	-11.2	3.57 V	122	46.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.3 PK			1.05 H	110	95.9	6.4
2	*6445.00	91.6 AV			1.05 H	110	85.2	6.4
3	#12890.00	50.9 PK	88.2	-37.3	3.75 H	338	37.9	13.0
4	#12890.00	39.1 AV	68.2	-29.1	3.75 H	338	26.1	13.0
5	19335.00	56.1 PK	74.0	-17.9	3.99 H	260	59.8	-3.7
6	19335.00	44.2 AV	54.0	-9.8	3.99 H	260	47.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	104.5 PK			2.10 V	177	98.1	6.4
2	*6445.00	91.9 AV			2.10 V	177	85.5	6.4
3	#12890.00	50.6 PK	88.2	-37.6	3.35 V	342	37.6	13.0
4	#12890.00	38.0 AV	68.2	-30.2	3.35 V	342	25.0	13.0
5	19335.00	56.2 PK	74.0	-17.8	3.60 V	124	59.9	-3.7
6	19335.00	43.6 AV	54.0	-10.4	3.60 V	124	47.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.4 PK			2.18 H	117	103.7	6.7
2	*6485.00	98.8 AV			2.18 H	117	92.1	6.7
3	#12970.00	50.3 PK	88.2	-37.9	3.85 H	350	37.2	13.1
4	#12970.00	38.8 AV	68.2	-29.4	3.85 H	350	25.7	13.1
5	19455.00	56.7 PK	74.0	-17.3	3.90 H	258	60.6	-3.9
6	19455.00	44.7 AV	54.0	-9.3	3.90 H	258	48.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.8 PK			1.63 V	176	107.1	6.7
2	*6485.00	100.7 AV			1.63 V	176	94.0	6.7
3	#12970.00	50.1 PK	88.2	-38.1	3.32 V	360	37.0	13.1
4	#12970.00	37.4 AV	68.2	-30.8	3.32 V	360	24.3	13.1
5	19455.00	54.9 PK	74.0	-19.1	3.58 V	111	58.8	-3.9
6	19455.00	42.3 AV	54.0	-11.7	3.58 V	111	46.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.9 PK			1.00 H	98	95.0	6.9
2	*6525.00	91.4 AV			1.00 H	98	84.5	6.9
3	#13050.00	50.9 PK	88.2	-37.3	3.79 H	360	37.7	13.2
4	#13050.00	39.0 AV	68.2	-29.2	3.79 H	360	25.8	13.2
5	19575.00	56.6 PK	74.0	-17.4	3.96 H	260	60.7	-4.1
6	19575.00	45.0 AV	54.0	-9.0	3.96 H	260	49.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	103.3 PK			2.11 V	180	96.4	6.9
2	*6525.00	92.2 AV			2.11 V	180	85.3	6.9
3	#13050.00	49.9 PK	88.2	-38.3	3.29 V	329	36.7	13.2
4	#13050.00	37.3 AV	68.2	-30.9	3.29 V	329	24.1	13.2
5	19575.00	55.8 PK	74.0	-18.2	3.56 V	122	59.9	-4.1
6	19575.00	43.8 AV	54.0	-10.2	3.56 V	122	47.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.5 PK			2.23 H	134	103.6	6.9
2	*6565.00	98.7 AV			2.23 H	134	91.8	6.9
3	#13130.00	49.8 PK	88.2	-38.4	3.81 H	360	36.6	13.2
4	#13130.00	38.3 AV	68.2	-29.9	3.81 H	360	25.1	13.2
5	19695.00	56.3 PK	74.0	-17.7	3.91 H	247	60.2	-3.9
6	19695.00	44.4 AV	54.0	-9.6	3.91 H	247	48.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	113.6 PK			1.60 V	186	106.7	6.9
2	*6565.00	100.9 AV			1.60 V	186	94.0	6.9
3	#13130.00	50.0 PK	88.2	-38.2	3.29 V	342	36.8	13.2
4	#13130.00	37.5 AV	68.2	-30.7	3.29 V	342	24.3	13.2
5	19695.00	55.4 PK	74.0	-18.6	3.52 V	127	59.3	-3.9
6	19695.00	42.3 AV	54.0	-11.7	3.52 V	127	46.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.3 PK			2.24 H	130	103.1	7.2
2	*6685.00	98.6 AV			2.24 H	130	91.4	7.2
3	13370.00	50.9 PK	74.0	-23.1	3.84 H	360	36.9	14.0
4	13370.00	39.0 AV	54.0	-15.0	3.84 H	360	25.0	14.0
5	20055.00	56.7 PK	74.0	-17.3	3.93 H	248	60.2	-3.5
6	20055.00	44.9 AV	54.0	-9.1	3.93 H	248	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.2 PK			1.61 V	195	106.0	7.2
2	*6685.00	100.2 AV			1.61 V	195	93.0	7.2
3	13370.00	49.1 PK	74.0	-24.9	3.33 V	360	35.1	14.0
4	13370.00	36.9 AV	54.0	-17.1	3.33 V	360	22.9	14.0
5	20055.00	55.8 PK	74.0	-18.2	3.52 V	117	59.3	-3.5
6	20055.00	43.0 AV	54.0	-11.0	3.52 V	117	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.2 PK			2.23 H	128	103.1	7.1
2	*6845.00	98.4 AV			2.23 H	128	91.3	7.1
3	#13690.00	50.3 PK	88.2	-37.9	3.88 H	352	35.2	15.1
4	#13690.00	38.6 AV	68.2	-29.6	3.88 H	352	23.5	15.1
5	20535.00	56.2 PK	74.0	-17.8	3.96 H	271	59.4	-3.2
6	20535.00	44.2 AV	54.0	-9.8	3.96 H	271	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.7 PK			1.61 V	180	106.6	7.1
2	*6845.00	100.9 AV			1.61 V	180	93.8	7.1
3	#13690.00	50.0 PK	88.2	-38.2	3.35 V	349	34.9	15.1
4	#13690.00	37.8 AV	68.2	-30.4	3.35 V	349	22.7	15.1
5	20535.00	55.4 PK	74.0	-18.6	3.60 V	131	58.6	-3.2
6	20535.00	42.4 AV	54.0	-11.6	3.60 V	131	45.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	101.9 PK			1.04 H	128	94.7	7.2
2	*6885.00	91.5 AV			1.04 H	128	84.3	7.2
3	#13770.00	50.8 PK	88.2	-37.4	3.80 H	360	35.8	15.0
4	#13770.00	39.0 AV	68.2	-29.2	3.80 H	360	24.0	15.0
5	20655.00	56.2 PK	74.0	-17.8	4.00 H	265	59.5	-3.3
6	20655.00	44.2 AV	54.0	-9.8	4.00 H	265	47.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	103.6 PK			2.15 V	174	96.4	7.2
2	*6885.00	92.4 AV			2.15 V	174	85.2	7.2
3	#13770.00	50.3 PK	88.2	-37.9	3.28 V	339	35.3	15.0
4	#13770.00	38.0 AV	68.2	-30.2	3.28 V	339	23.0	15.0
5	20655.00	56.6 PK	74.0	-17.4	3.50 V	123	59.9	-3.3
6	20655.00	44.1 AV	54.0	-9.9	3.50 V	123	47.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.7 PK			1.00 H	120	95.0	7.7
2	*6965.00	92.1 AV			1.00 H	120	84.4	7.7
3	#13930.00	51.1 PK	88.2	-37.1	3.80 H	350	35.8	15.3
4	#13930.00	39.1 AV	68.2	-29.1	3.80 H	350	23.8	15.3
5	20895.00	56.1 PK	74.0	-17.9	4.00 H	236	58.8	-2.7
6	20895.00	44.2 AV	54.0	-9.8	4.00 H	236	46.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	103.4 PK			2.15 V	174	95.7	7.7
2	*6965.00	92.0 AV			2.15 V	174	84.3	7.7
3	#13930.00	50.2 PK	88.2	-38.0	3.35 V	332	34.9	15.3
4	#13930.00	37.6 AV	68.2	-30.6	3.35 V	332	22.3	15.3
5	20895.00	56.5 PK	74.0	-17.5	3.58 V	139	59.2	-2.7
6	20895.00	43.9 AV	54.0	-10.1	3.58 V	139	46.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	102.3 PK			1.00 H	113	93.1	9.2
2	*7085.00	91.8 AV			1.00 H	113	82.6	9.2
3	#7125.00	56.6 PK	88.2	-31.6	1.00 H	113	47.2	9.4
4	#7125.00	45.0 AV	68.2	-23.2	1.00 H	113	35.6	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.00 H	113	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.00 H	113	34.8	8.7
7	#14170.00	51.4 PK	88.2	-36.8	3.84 H	344	36.2	15.2
8	#14170.00	39.5 AV	68.2	-28.7	3.84 H	344	24.3	15.2
9	21255.00	56.4 PK	74.0	-17.6	3.99 H	237	57.8	-1.4
10	21255.00	44.6 AV	54.0	-9.4	3.99 H	237	46.0	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	103.1 PK			1.45 V	185	93.9	9.2
2	*7085.00	92.4 AV			1.45 V	185	83.2	9.2
3	#7125.00	56.4 PK	88.2	-31.8	1.45 V	185	47.0	9.4
4	#7125.00	45.0 AV	68.2	-23.2	1.45 V	185	35.6	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.45 V	185	46.1	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.45 V	185	34.7	8.7
7	#14170.00	50.6 PK	88.2	-37.6	3.35 V	321	35.4	15.2
8	#14170.00	38.0 AV	68.2	-30.2	3.35 V	321	22.8	15.2
9	21255.00	55.5 PK	74.0	-18.5	3.52 V	119	56.9	-1.4
10	21255.00	43.3 AV	54.0	-10.7	3.52 V	119	44.7	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.3 PK	88.2	-13.9	2.20 H	132	70.0	4.3
2	#5925.00	63.2 AV	68.2	-5.0	2.20 H	132	58.9	4.3
3	*5985.00	107.9 PK			2.20 H	132	103.5	4.4
4	*5985.00	96.3 AV			2.20 H	132	91.9	4.4
5	11970.00	50.0 PK	74.0	-24.0	3.93 H	356	37.8	12.2
6	11970.00	38.6 AV	54.0	-15.4	3.93 H	356	26.4	12.2
7	17955.00	55.9 PK	74.0	-18.1	3.98 H	283	32.5	23.4
8	17955.00	43.9 AV	54.0	-10.1	3.98 H	283	20.5	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.59 V	182	72.2	4.3
2	#5925.00	65.8 AV	68.2	-2.4	1.59 V	182	61.5	4.3
3	*5985.00	109.8 PK			1.59 V	182	105.4	4.4
4	*5985.00	97.7 AV			1.59 V	182	93.3	4.4
5	11970.00	50.0 PK	74.0	-24.0	3.33 V	340	37.8	12.2
6	11970.00	37.6 AV	54.0	-16.4	3.33 V	340	25.4	12.2
7	17955.00	55.7 PK	74.0	-18.3	3.56 V	143	32.3	23.4
8	17955.00	42.8 AV	54.0	-11.2	3.56 V	143	19.4	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.6 PK			2.26 H	127	102.6	5.0
2	*6225.00	95.9 AV			2.26 H	127	90.9	5.0
3	12450.00	51.0 PK	74.0	-23.0	3.90 H	340	38.7	12.3
4	12450.00	39.1 AV	54.0	-14.9	3.90 H	340	26.8	12.3
5	18675.00	55.8 PK	74.0	-18.2	4.00 H	286	60.7	-4.9
6	18675.00	43.9 AV	54.0	-10.1	4.00 H	286	48.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.8 PK			1.53 V	195	104.8	5.0
2	*6225.00	97.5 AV			1.53 V	195	92.5	5.0
3	12450.00	49.9 PK	74.0	-24.1	3.29 V	350	37.6	12.3
4	12450.00	37.8 AV	54.0	-16.2	3.29 V	350	25.5	12.3
5	18675.00	55.8 PK	74.0	-18.2	3.59 V	133	60.7	-4.9
6	18675.00	42.8 AV	54.0	-11.2	3.59 V	133	47.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.8 PK			2.26 H	143	101.6	6.2
2	*6385.00	96.1 AV			2.26 H	143	89.9	6.2
3	#12770.00	51.0 PK	88.2	-37.2	3.86 H	360	38.2	12.8
4	#12770.00	39.0 AV	68.2	-29.2	3.86 H	360	26.2	12.8
5	19155.00	56.5 PK	74.0	-17.5	3.99 H	280	60.3	-3.8
6	19155.00	44.4 AV	54.0	-9.6	3.99 H	280	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.4 PK			1.55 V	167	103.2	6.2
2	*6385.00	97.3 AV			1.55 V	167	91.1	6.2
3	#12770.00	49.5 PK	88.2	-38.7	3.38 V	360	36.7	12.8
4	#12770.00	37.3 AV	68.2	-30.9	3.38 V	360	24.5	12.8
5	19155.00	55.1 PK	74.0	-18.9	3.64 V	131	58.9	-3.8
6	19155.00	42.0 AV	54.0	-12.0	3.64 V	131	45.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	108.5 PK			2.22 H	141	102.0	6.5
2	*6465.00	96.8 AV			2.22 H	141	90.3	6.5
3	#12930.00	50.2 PK	88.2	-38.0	3.88 H	360	37.1	13.1
4	#12930.00	38.7 AV	68.2	-29.5	3.88 H	360	25.6	13.1
5	19395.00	56.1 PK	74.0	-17.9	4.00 H	266	59.8	-3.7
6	19395.00	43.9 AV	54.0	-10.1	4.00 H	266	47.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.4 PK			1.58 V	193	102.9	6.5
2	*6465.00	97.3 AV			1.58 V	193	90.8	6.5
3	#12930.00	49.8 PK	88.2	-38.4	3.32 V	346	36.7	13.1
4	#12930.00	37.6 AV	68.2	-30.6	3.32 V	346	24.5	13.1
5	19395.00	55.5 PK	74.0	-18.5	3.55 V	144	59.2	-3.7
6	19395.00	42.5 AV	54.0	-11.5	3.55 V	144	46.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.2 PK			1.00 H	102	96.3	6.9
2	*6545.00	91.0 AV			1.00 H	102	84.1	6.9
3	#13090.00	50.9 PK	88.2	-37.3	3.83 H	360	37.7	13.2
4	#13090.00	39.2 AV	68.2	-29.0	3.83 H	360	26.0	13.2
5	19635.00	56.4 PK	74.0	-17.6	4.00 H	250	60.4	-4.0
6	19635.00	44.8 AV	54.0	-9.2	4.00 H	250	48.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.9 PK			2.09 V	178	97.0	6.9
2	*6545.00	91.9 AV			2.09 V	178	85.0	6.9
3	#13090.00	50.7 PK	88.2	-37.5	3.36 V	322	37.5	13.2
4	#13090.00	38.1 AV	68.2	-30.1	3.36 V	322	24.9	13.2
5	19635.00	55.6 PK	74.0	-18.4	3.55 V	134	59.6	-4.0
6	19635.00	43.5 AV	54.0	-10.5	3.55 V	134	47.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.7 PK			2.15 H	123	100.8	6.9
2	*6625.00	96.0 AV			2.15 H	123	89.1	6.9
3	13250.00	50.2 PK	74.0	-23.8	3.88 H	360	36.6	13.6
4	13250.00	38.3 AV	54.0	-15.7	3.88 H	360	24.7	13.6
5	19875.00	55.9 PK	74.0	-18.1	3.99 H	281	59.4	-3.5
6	19875.00	43.9 AV	54.0	-10.1	3.99 H	281	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.9 PK			1.58 V	186	103.0	6.9
2	*6625.00	97.7 AV			1.58 V	186	90.8	6.9
3	13250.00	49.9 PK	74.0	-24.1	3.41 V	348	36.3	13.6
4	13250.00	37.5 AV	54.0	-16.5	3.41 V	348	23.9	13.6
5	19875.00	55.2 PK	74.0	-18.8	3.60 V	124	58.7	-3.5
6	19875.00	42.4 AV	54.0	-11.6	3.60 V	124	45.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.9 PK			2.22 H	129	100.7	7.2
2	*6705.00	96.5 AV			2.22 H	129	89.3	7.2
3	#13410.00	50.2 PK	88.2	-38.0	3.83 H	353	36.0	14.2
4	#13410.00	38.3 AV	68.2	-29.9	3.83 H	353	24.1	14.2
5	20115.00	56.3 PK	74.0	-17.7	3.96 H	275	59.8	-3.5
6	20115.00	44.6 AV	54.0	-9.4	3.96 H	275	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.2 PK			1.55 V	171	103.0	7.2
2	*6705.00	97.9 AV			1.55 V	171	90.7	7.2
3	#13410.00	49.8 PK	88.2	-38.4	3.34 V	352	35.6	14.2
4	#13410.00	37.9 AV	68.2	-30.3	3.34 V	352	23.7	14.2
5	20115.00	55.0 PK	74.0	-19.0	3.62 V	144	58.5	-3.5
6	20115.00	42.2 AV	54.0	-11.8	3.62 V	144	45.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.2 PK			2.19 H	135	101.2	7.0
2	*6785.00	96.3 AV			2.19 H	135	89.3	7.0
3	#13570.00	50.2 PK	88.2	-38.0	3.85 H	360	35.6	14.6
4	#13570.00	38.3 AV	68.2	-29.9	3.85 H	360	23.7	14.6
5	20355.00	56.1 PK	74.0	-17.9	3.94 H	272	59.2	-3.1
6	20355.00	44.0 AV	54.0	-10.0	3.94 H	272	47.1	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.6 PK			1.56 V	186	102.6	7.0
2	*6785.00	97.5 AV			1.56 V	186	90.5	7.0
3	#13570.00	50.6 PK	88.2	-37.6	3.32 V	353	36.0	14.6
4	#13570.00	38.2 AV	68.2	-30.0	3.32 V	353	23.6	14.6
5	20355.00	55.1 PK	74.0	-18.9	3.59 V	144	58.2	-3.1
6	20355.00	42.2 AV	54.0	-11.8	3.59 V	144	45.3	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.4 PK			1.00 H	104	96.2	7.2
2	*6865.00	90.9 AV			1.00 H	104	83.7	7.2
3	#13730.00	50.9 PK	88.2	-37.3	3.84 H	349	35.8	15.1
4	#13730.00	38.9 AV	68.2	-29.3	3.84 H	349	23.8	15.1
5	20595.00	56.3 PK	74.0	-17.7	4.00 H	256	59.6	-3.3
6	20595.00	44.3 AV	54.0	-9.7	4.00 H	256	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	104.3 PK			2.06 V	176	97.1	7.2
2	*6865.00	92.3 AV			2.06 V	176	85.1	7.2
3	#13730.00	49.9 PK	88.2	-38.3	3.37 V	319	34.8	15.1
4	#13730.00	37.3 AV	68.2	-30.9	3.37 V	319	22.2	15.1
5	20595.00	55.5 PK	74.0	-18.5	3.62 V	113	58.8	-3.3
6	20595.00	43.4 AV	54.0	-10.6	3.62 V	113	46.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	103.3 PK			1.00 H	124	95.8	7.5
2	*6945.00	90.6 AV			1.00 H	124	83.1	7.5
3	#13890.00	51.1 PK	88.2	-37.1	3.79 H	360	35.9	15.2
4	#13890.00	39.3 AV	68.2	-28.9	3.79 H	360	24.1	15.2
5	20835.00	56.3 PK	74.0	-17.7	3.99 H	244	59.2	-2.9
6	20835.00	44.3 AV	54.0	-9.7	3.99 H	244	47.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	103.3 PK			2.12 V	178	95.8	7.5
2	*6945.00	91.6 AV			2.12 V	178	84.1	7.5
3	#13890.00	49.6 PK	88.2	-38.6	3.36 V	335	34.4	15.2
4	#13890.00	37.5 AV	68.2	-30.7	3.36 V	335	22.3	15.2
5	20835.00	55.7 PK	74.0	-18.3	3.59 V	130	58.6	-2.9
6	20835.00	43.4 AV	54.0	-10.6	3.59 V	130	46.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.5 PK			1.00 H	111	95.1	8.4
2	*7025.00	91.0 AV			1.00 H	111	82.6	8.4
3	#7125.00	57.0 PK	88.2	-31.2	1.00 H	111	47.6	9.4
4	#7125.00	45.5 AV	68.2	-22.7	1.00 H	111	36.1	9.4
5	7250.00	54.3 PK	74.0	-19.7	1.00 H	111	45.6	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.00 H	111	34.8	8.7
7	#14050.00	50.9 PK	88.2	-37.3	3.78 H	335	35.4	15.5
8	#14050.00	38.7 AV	68.2	-29.5	3.78 H	335	23.2	15.5
9	21075.00	56.7 PK	74.0	-17.3	3.95 H	234	58.9	-2.2
10	21075.00	45.0 AV	54.0	-9.0	3.95 H	234	47.2	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.5 PK			1.48 V	185	95.1	8.4
2	*7025.00	92.1 AV			1.48 V	185	83.7	8.4
3	#7125.00	56.8 PK	88.2	-31.4	1.48 V	185	47.4	9.4
4	#7125.00	45.7 AV	68.2	-22.5	1.48 V	185	36.3	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.48 V	185	46.3	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.48 V	185	34.9	8.7
7	#14050.00	50.0 PK	88.2	-38.2	3.27 V	324	34.5	15.5
8	#14050.00	37.4 AV	68.2	-30.8	3.27 V	324	21.9	15.5
9	21075.00	56.0 PK	74.0	-18.0	3.57 V	115	58.2	-2.2
10	21075.00	43.6 AV	54.0	-10.4	3.57 V	115	45.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.3 PK	88.2	-13.9	2.24 H	298	70.0	4.3
2	#5925.00	63.6 AV	68.2	-4.6	2.24 H	298	59.3	4.3
3	*6025.00	105.0 PK			2.24 H	298	100.8	4.2
4	*6025.00	93.8 AV			2.24 H	298	89.6	4.2
5	12050.00	49.8 PK	74.0	-24.2	3.83 H	360	37.4	12.4
6	12050.00	37.8 AV	54.0	-16.2	3.83 H	360	25.4	12.4
7	18075.00	56.5 PK	74.0	-17.5	3.90 H	281	61.2	-4.7
8	18075.00	44.5 AV	54.0	-9.5	3.90 H	281	49.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.50 V	199	72.5	4.3
2	#5925.00	65.2 AV	68.2	-3.0	1.50 V	199	60.9	4.3
3	*6025.00	107.5 PK			1.50 V	199	103.3	4.2
4	*6025.00	95.2 AV			1.50 V	199	91.0	4.2
5	12050.00	51.2 PK	74.0	-22.8	3.29 V	360	38.8	12.4
6	12050.00	38.5 AV	54.0	-15.5	3.29 V	360	26.1	12.4
7	18075.00	54.7 PK	74.0	-19.3	3.58 V	156	59.4	-4.7
8	18075.00	41.9 AV	54.0	-12.1	3.58 V	156	46.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.2 PK			2.29 H	296	100.4	4.8
2	*6185.00	94.3 AV			2.29 H	296	89.5	4.8
3	12370.00	49.5 PK	74.0	-24.5	3.89 H	360	37.2	12.3
4	12370.00	37.9 AV	54.0	-16.1	3.89 H	360	25.6	12.3
5	18555.00	56.2 PK	74.0	-17.8	3.92 H	265	61.1	-4.9
6	18555.00	44.3 AV	54.0	-9.7	3.92 H	265	49.2	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.6 PK			1.49 V	207	102.8	4.8
2	*6185.00	95.2 AV			1.49 V	207	90.4	4.8
3	12370.00	51.0 PK	74.0	-23.0	3.34 V	359	38.7	12.3
4	12370.00	38.6 AV	54.0	-15.4	3.34 V	359	26.3	12.3
5	18555.00	55.4 PK	74.0	-18.6	3.57 V	155	60.3	-4.9
6	18555.00	42.4 AV	54.0	-11.6	3.57 V	155	47.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			2.22 H	282	99.2	6.1
2	*6345.00	94.1 AV			2.22 H	282	88.0	6.1
3	12690.00	49.9 PK	74.0	-24.1	3.90 H	354	37.0	12.9
4	12690.00	38.0 AV	54.0	-16.0	3.90 H	354	25.1	12.9
5	19035.00	56.3 PK	74.0	-17.7	3.88 H	258	60.2	-3.9
6	19035.00	44.3 AV	54.0	-9.7	3.88 H	258	48.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.7 PK			1.49 V	187	101.6	6.1
2	*6345.00	95.4 AV			1.49 V	187	89.3	6.1
3	12690.00	51.1 PK	74.0	-22.9	3.25 V	360	38.2	12.9
4	12690.00	38.6 AV	54.0	-15.4	3.25 V	360	25.7	12.9
5	19035.00	54.4 PK	74.0	-19.6	3.59 V	159	58.3	-3.9
6	19035.00	41.6 AV	54.0	-12.4	3.59 V	159	45.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.3 PK			2.28 H	298	98.5	6.8
2	*6505.00	93.9 AV			2.28 H	298	87.1	6.8
3	#13010.00	50.2 PK	88.2	-38.0	3.88 H	360	37.0	13.2
4	#13010.00	38.4 AV	68.2	-29.8	3.88 H	360	25.2	13.2
5	19515.00	56.7 PK	74.0	-17.3	3.93 H	261	60.8	-4.1
6	19515.00	44.5 AV	54.0	-9.5	3.93 H	261	48.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.0 PK			1.53 V	211	100.2	6.8
2	*6505.00	94.8 AV			1.53 V	211	88.0	6.8
3	#13010.00	51.0 PK	88.2	-37.2	3.27 V	360	37.8	13.2
4	#13010.00	38.5 AV	68.2	-29.7	3.27 V	360	25.3	13.2
5	19515.00	55.0 PK	74.0	-19.0	3.61 V	164	59.1	-4.1
6	19515.00	41.9 AV	54.0	-12.1	3.61 V	164	46.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.5 PK			2.23 H	301	97.3	7.2
2	*6665.00	93.4 AV			2.23 H	301	86.2	7.2
3	13330.00	50.6 PK	74.0	-23.4	3.91 H	359	36.8	13.8
4	13330.00	38.5 AV	54.0	-15.5	3.91 H	359	24.7	13.8
5	19995.00	56.3 PK	74.0	-17.7	3.91 H	270	59.9	-3.6
6	19995.00	44.0 AV	54.0	-10.0	3.91 H	270	47.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.5 PK			1.51 V	195	100.3	7.2
2	*6665.00	95.3 AV			1.51 V	195	88.1	7.2
3	13330.00	51.4 PK	74.0	-22.6	3.28 V	358	37.6	13.8
4	13330.00	38.8 AV	54.0	-15.2	3.28 V	358	25.0	13.8
5	19995.00	54.7 PK	74.0	-19.3	3.64 V	150	58.3	-3.6
6	19995.00	41.8 AV	54.0	-12.2	3.64 V	150	45.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	102.4 PK			1.00 H	117	95.3	7.1
2	*6825.00	91.3 AV			1.00 H	117	84.2	7.1
3	#13650.00	51.5 PK	88.2	-36.7	3.81 H	360	36.6	14.9
4	#13650.00	39.3 AV	68.2	-28.9	3.81 H	360	24.4	14.9
5	20475.00	56.5 PK	74.0	-17.5	4.00 H	234	59.7	-3.2
6	20475.00	45.0 AV	54.0	-9.0	4.00 H	234	48.2	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.4 PK			1.99 V	177	97.3	7.1
2	*6825.00	92.4 AV			1.99 V	177	85.3	7.1
3	#13650.00	50.2 PK	88.2	-38.0	3.26 V	338	35.3	14.9
4	#13650.00	37.9 AV	68.2	-30.3	3.26 V	338	23.0	14.9
5	20475.00	56.4 PK	74.0	-17.6	3.55 V	126	59.6	-3.2
6	20475.00	44.1 AV	54.0	-9.9	3.55 V	126	47.3	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.7 PK			1.00 H	112	94.9	7.8
2	*6985.00	91.8 AV			1.00 H	112	84.0	7.8
3	#7125.00	67.1 PK	88.2	-21.1	1.00 H	112	57.7	9.4
4	#7125.00	55.6 AV	68.2	-12.6	1.00 H	112	46.2	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.00 H	112	46.2	8.7
6	7250.00	44.0 AV	54.0	-10.0	1.00 H	112	35.3	8.7
7	#13970.00	50.7 PK	88.2	-37.5	3.83 H	360	35.2	15.5
8	#13970.00	38.8 AV	68.2	-29.4	3.83 H	360	23.3	15.5
9	20955.00	56.0 PK	74.0	-18.0	4.00 H	253	58.7	-2.7
10	20955.00	44.2 AV	54.0	-9.8	4.00 H	253	46.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.6 PK			1.33 V	184	96.8	7.8
2	*6985.00	92.9 AV			1.33 V	184	85.1	7.8
3	#7125.00	68.9 PK	88.2	-19.3	1.33 V	184	59.5	9.4
4	#7125.00	56.4 AV	68.2	-11.8	1.33 V	184	47.0	9.4
5	7250.00	56.0 PK	74.0	-18.0	1.33 V	184	47.3	8.7
6	7250.00	44.7 AV	54.0	-9.3	1.33 V	184	36.0	8.7
7	#13970.00	50.6 PK	88.2	-37.6	3.25 V	313	35.1	15.5
8	#13970.00	38.0 AV	68.2	-30.2	3.25 V	313	22.5	15.5
9	20955.00	56.4 PK	74.0	-17.6	3.54 V	115	59.1	-2.7
10	20955.00	44.1 AV	54.0	-9.9	3.54 V	115	46.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.5 PK	88.2	-16.7	2.22 H	132	67.2	4.3
2	#5925.00	53.2 AV	68.2	-15.0	2.22 H	132	48.9	4.3
3	*5955.00	120.9 PK			2.22 H	132	116.4	4.5
4	*5955.00	113.1 AV			2.22 H	132	108.6	4.5
5	11910.00	50.5 PK	74.0	-23.5	3.86 H	360	38.3	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.86 H	360	26.3	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.89 H	285	34.4	21.9
8	17865.00	44.4 AV	54.0	-9.6	3.89 H	285	22.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	1.63 V	202	68.5	4.3
2	#5925.00	53.9 AV	68.2	-14.3	1.63 V	202	49.6	4.3
3	*5955.00	122.7 PK			1.63 V	202	118.2	4.5
4	*5955.00	113.7 AV			1.63 V	202	109.2	4.5
5	11910.00	51.8 PK	74.0	-22.2	3.28 V	343	39.6	12.2
6	11910.00	39.0 AV	54.0	-15.0	3.28 V	343	26.8	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.66 V	138	32.9	21.9
8	17865.00	41.9 AV	54.0	-12.1	3.66 V	138	20.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			2.22 H	132	116.1	4.8
2	*6195.00	113.1 AV			2.22 H	132	108.3	4.8
3	12390.00	50.5 PK	74.0	-23.5	3.86 H	360	38.2	12.3
4	12390.00	38.5 AV	54.0	-15.5	3.86 H	360	26.2	12.3
5	18585.00	56.3 PK	74.0	-17.7	3.89 H	285	61.3	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.89 H	285	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.3 PK			1.62 V	192	117.5	4.8
2	*6195.00	113.3 AV			1.62 V	192	108.5	4.8
3	12390.00	51.4 PK	74.0	-22.6	3.26 V	338	39.1	12.3
4	12390.00	38.5 AV	54.0	-15.5	3.26 V	338	26.2	12.3
5	18585.00	55.5 PK	74.0	-18.5	3.70 V	128	60.5	-5.0
6	18585.00	42.3 AV	54.0	-11.7	3.70 V	128	47.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.9 PK			2.22 H	132	114.5	6.4
2	*6415.00	113.1 AV			2.22 H	132	106.7	6.4
3	#12830.00	50.5 PK	88.2	-37.7	3.86 H	360	37.5	13.0
4	#12830.00	38.5 AV	68.2	-29.7	3.86 H	360	25.5	13.0
5	19245.00	56.3 PK	74.0	-17.7	3.89 H	285	60.1	-3.8
6	19245.00	44.4 AV	54.0	-9.6	3.89 H	285	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			1.64 V	207	116.3	6.4
2	*6415.00	113.9 AV			1.64 V	207	107.5	6.4
3	#12830.00	52.5 PK	88.2	-35.7	3.31 V	329	39.5	13.0
4	#12830.00	39.5 AV	68.2	-28.7	3.31 V	329	26.5	13.0
5	19245.00	54.2 PK	74.0	-19.8	3.64 V	150	58.0	-3.8
6	19245.00	41.6 AV	54.0	-12.4	3.64 V	150	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.9 PK			3.30 H	89	95.5	6.4
2	*6435.00	91.1 AV			3.30 H	89	84.7	6.4
3	#12870.00	50.3 PK	88.2	-37.9	3.75 H	344	37.3	13.0
4	#12870.00	38.7 AV	68.2	-29.5	3.75 H	344	25.7	13.0
5	19305.00	56.9 PK	74.0	-17.1	4.00 H	248	60.6	-3.7
6	19305.00	44.8 AV	54.0	-9.2	4.00 H	248	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.8 PK			2.12 V	177	96.4	6.4
2	*6435.00	92.4 AV			2.12 V	177	86.0	6.4
3	#12870.00	50.3 PK	88.2	-37.9	3.35 V	344	37.3	13.0
4	#12870.00	37.8 AV	68.2	-30.4	3.35 V	344	24.8	13.0
5	19305.00	55.8 PK	74.0	-18.2	3.52 V	132	59.5	-3.7
6	19305.00	43.4 AV	54.0	-10.6	3.52 V	132	47.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.9 PK			2.22 H	132	114.3	6.6
2	*6475.00	113.1 AV			2.22 H	132	106.5	6.6
3	#12950.00	50.5 PK	88.2	-37.7	3.86 H	360	37.4	13.1
4	#12950.00	38.5 AV	68.2	-29.7	3.86 H	360	25.4	13.1
5	19425.00	56.3 PK	74.0	-17.7	3.89 H	285	60.1	-3.8
6	19425.00	44.4 AV	54.0	-9.6	3.89 H	285	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.5 PK			1.65 V	202	115.9	6.6
2	*6475.00	113.7 AV			1.65 V	202	107.1	6.6
3	#12950.00	51.2 PK	88.2	-37.0	3.23 V	358	38.1	13.1
4	#12950.00	38.5 AV	68.2	-29.7	3.23 V	358	25.4	13.1
5	19425.00	55.5 PK	74.0	-18.5	3.68 V	136	59.3	-3.8
6	19425.00	42.4 AV	54.0	-11.6	3.68 V	136	46.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.3 PK			3.33 H	88	95.4	6.9
2	*6515.00	91.4 AV			3.33 H	88	84.5	6.9
3	#13030.00	50.7 PK	88.2	-37.5	3.81 H	357	37.5	13.2
4	#13030.00	38.6 AV	68.2	-29.6	3.81 H	357	25.4	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.97 H	243	60.8	-4.1
6	19545.00	44.8 AV	54.0	-9.2	3.97 H	243	48.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.3 PK			2.06 V	178	96.4	6.9
2	*6515.00	93.2 AV			2.06 V	178	86.3	6.9
3	#13030.00	50.2 PK	88.2	-38.0	3.28 V	313	37.0	13.2
4	#13030.00	37.9 AV	68.2	-30.3	3.28 V	313	24.7	13.2
5	19545.00	55.8 PK	74.0	-18.2	3.50 V	126	59.9	-4.1
6	19545.00	43.5 AV	54.0	-10.5	3.50 V	126	47.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.9 PK			2.22 H	132	114.0	6.9
2	*6535.00	113.1 AV			2.22 H	132	106.2	6.9
3	#13070.00	50.5 PK	88.2	-37.7	3.86 H	360	37.3	13.2
4	#13070.00	38.5 AV	68.2	-29.7	3.86 H	360	25.3	13.2
5	19605.00	56.3 PK	74.0	-17.7	3.89 H	285	60.3	-4.0
6	19605.00	44.4 AV	54.0	-9.6	3.89 H	285	48.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.3 PK			1.65 V	191	115.4	6.9
2	*6535.00	113.2 AV			1.65 V	191	106.3	6.9
3	#13070.00	51.6 PK	88.2	-36.6	3.32 V	345	38.4	13.2
4	#13070.00	38.9 AV	68.2	-29.3	3.32 V	345	25.7	13.2
5	19605.00	54.7 PK	74.0	-19.3	3.61 V	140	58.7	-4.0
6	19605.00	41.5 AV	54.0	-12.5	3.61 V	140	45.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.9 PK			2.22 H	132	113.7	7.2
2	*6695.00	113.1 AV			2.22 H	132	105.9	7.2
3	13390.00	50.5 PK	74.0	-23.5	3.86 H	360	36.5	14.0
4	13390.00	38.5 AV	54.0	-15.5	3.86 H	360	24.5	14.0
5	20085.00	56.3 PK	74.0	-17.7	3.89 H	285	59.8	-3.5
6	20085.00	44.4 AV	54.0	-9.6	3.89 H	285	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			1.65 V	215	115.1	7.2
2	*6695.00	113.6 AV			1.65 V	215	106.4	7.2
3	13390.00	51.7 PK	74.0	-22.3	3.33 V	338	37.7	14.0
4	13390.00	39.0 AV	54.0	-15.0	3.33 V	338	25.0	14.0
5	20085.00	54.8 PK	74.0	-19.2	3.67 V	135	58.3	-3.5
6	20085.00	41.6 AV	54.0	-12.4	3.67 V	135	45.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.9 PK			2.22 H	132	113.7	7.2
2	*6855.00	113.1 AV			2.22 H	132	105.9	7.2
3	#13710.00	50.5 PK	88.2	-37.7	3.86 H	360	35.3	15.2
4	#13710.00	38.5 AV	68.2	-29.7	3.86 H	360	23.3	15.2
5	20565.00	56.3 PK	74.0	-17.7	3.89 H	285	59.6	-3.3
6	20565.00	44.4 AV	54.0	-9.6	3.89 H	285	47.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.6 PK			1.64 V	207	115.4	7.2
2	*6855.00	113.7 AV			1.64 V	207	106.5	7.2
3	#13710.00	51.2 PK	88.2	-37.0	3.26 V	335	36.0	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.26 V	335	23.4	15.2
5	20565.00	55.2 PK	74.0	-18.8	3.64 V	124	58.5	-3.3
6	20565.00	42.0 AV	54.0	-12.0	3.64 V	124	45.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.6 PK			3.29 H	80	94.4	7.2
2	*6875.00	91.0 AV			3.29 H	80	83.8	7.2
3	#13750.00	51.3 PK	88.2	-36.9	3.84 H	360	36.2	15.1
4	#13750.00	39.2 AV	68.2	-29.0	3.84 H	360	24.1	15.1
5	20625.00	55.7 PK	74.0	-18.3	4.00 H	240	59.0	-3.3
6	20625.00	44.2 AV	54.0	-9.8	4.00 H	240	47.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.6 PK			2.10 V	175	95.4	7.2
2	*6875.00	92.5 AV			2.10 V	175	85.3	7.2
3	#13750.00	50.1 PK	88.2	-38.1	3.27 V	327	35.0	15.1
4	#13750.00	37.6 AV	68.2	-30.6	3.27 V	327	22.5	15.1
5	20625.00	56.0 PK	74.0	-18.0	3.58 V	138	59.3	-3.3
6	20625.00	43.4 AV	54.0	-10.6	3.58 V	138	46.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.9 PK			3.33 H	92	93.9	8.0
2	*6995.00	91.1 AV			3.33 H	92	83.1	8.0
3	#13990.00	50.9 PK	88.2	-37.3	3.86 H	360	35.3	15.6
4	#13990.00	39.0 AV	68.2	-29.2	3.86 H	360	23.4	15.6
5	20985.00	56.9 PK	74.0	-17.1	4.00 H	236	59.7	-2.8
6	20985.00	44.8 AV	54.0	-9.2	4.00 H	236	47.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.3 PK			2.12 V	179	94.3	8.0
2	*6995.00	91.7 AV			2.12 V	179	83.7	8.0
3	#13990.00	49.9 PK	88.2	-38.3	3.35 V	329	34.3	15.6
4	#13990.00	37.3 AV	68.2	-30.9	3.35 V	329	21.7	15.6
5	20985.00	56.0 PK	74.0	-18.0	3.61 V	114	58.8	-2.8
6	20985.00	43.7 AV	54.0	-10.3	3.61 V	114	46.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.2 PK			3.31 H	108	90.7	9.5
2	*7115.00	89.3 AV			3.31 H	108	79.8	9.5
3	#7125.00	84.7 PK	88.2	-3.5	3.31 H	108	75.3	9.4
4	#7125.00	56.5 AV	68.2	-11.7	3.31 H	108	47.1	9.4
5	7250.00	55.2 PK	74.0	-18.8	3.31 H	108	46.5	8.7
6	7250.00	43.9 AV	54.0	-10.1	3.31 H	108	35.2	8.7
7	#14230.00	51.3 PK	88.2	-36.9	3.85 H	340	36.0	15.3
8	#14230.00	39.1 AV	68.2	-29.1	3.85 H	340	23.8	15.3
9	21345.00	56.1 PK	74.0	-17.9	3.99 H	239	57.7	-1.6
10	21345.00	44.3 AV	54.0	-9.7	3.99 H	239	45.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.7 PK			2.05 V	175	91.2	9.5
2	*7115.00	90.3 AV			2.05 V	175	80.8	9.5
3	#7125.00	86.3 PK	88.2	-1.9	2.05 V	175	76.9	9.4
4	#7125.00	57.5 AV	68.2	-10.7	2.05 V	175	48.1	9.4
5	7250.00	55.3 PK	74.0	-18.7	2.05 V	175	46.6	8.7
6	7250.00	43.5 AV	54.0	-10.5	2.05 V	175	34.8	8.7
7	#14230.00	50.4 PK	88.2	-37.8	3.36 V	339	35.1	15.3
8	#14230.00	38.0 AV	68.2	-30.2	3.36 V	339	22.7	15.3
9	21345.00	55.6 PK	74.0	-18.4	3.53 V	142	57.2	-1.6
10	21345.00	43.6 AV	54.0	-10.4	3.53 V	142	45.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.4 PK	88.2	-15.8	2.23 H	131	68.1	4.3
2	#5925.00	56.9 AV	68.2	-11.3	2.23 H	131	52.6	4.3
3	*5955.00	120.6 PK			2.23 H	131	116.1	4.5
4	*5955.00	111.4 AV			2.23 H	131	106.9	4.5
5	11910.00	51.2 PK	74.0	-22.8	3.85 H	360	39.0	12.2
6	11910.00	38.9 AV	54.0	-15.1	3.85 H	360	26.7	12.2
7	17865.00	56.7 PK	74.0	-17.3	3.85 H	276	34.8	21.9
8	17865.00	44.9 AV	54.0	-9.1	3.85 H	276	23.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.0 PK	88.2	-13.2	1.63 V	201	70.7	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.63 V	201	53.1	4.3
3	*5955.00	121.9 PK			1.63 V	201	117.4	4.5
4	*5955.00	112.0 AV			1.63 V	201	107.5	4.5
5	11910.00	51.1 PK	74.0	-22.9	3.25 V	330	38.9	12.2
6	11910.00	38.4 AV	54.0	-15.6	3.25 V	330	26.2	12.2
7	17865.00	54.7 PK	74.0	-19.3	3.58 V	120	32.8	21.9
8	17865.00	41.8 AV	54.0	-12.2	3.58 V	120	19.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.5 PK			2.24 H	133	115.7	4.8
2	*6195.00	111.3 AV			2.24 H	133	106.5	4.8
3	12390.00	50.9 PK	74.0	-23.1	3.91 H	360	38.6	12.3
4	12390.00	38.8 AV	54.0	-15.2	3.91 H	360	26.5	12.3
5	18585.00	57.0 PK	74.0	-17.0	3.85 H	263	62.0	-5.0
6	18585.00	45.4 AV	54.0	-8.6	3.85 H	263	50.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.4 PK			1.60 V	204	116.6	4.8
2	*6195.00	111.7 AV			1.60 V	204	106.9	4.8
3	12390.00	51.2 PK	74.0	-22.8	3.30 V	323	38.9	12.3
4	12390.00	38.6 AV	54.0	-15.4	3.30 V	323	26.3	12.3
5	18585.00	54.7 PK	74.0	-19.3	3.62 V	129	59.7	-5.0
6	18585.00	41.8 AV	54.0	-12.2	3.62 V	129	46.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			2.29 H	147	113.9	6.4
2	*6415.00	111.3 AV			2.29 H	147	104.9	6.4
3	#12830.00	51.8 PK	88.2	-36.4	3.84 H	360	38.8	13.0
4	#12830.00	39.2 AV	68.2	-29.0	3.84 H	360	26.2	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.83 H	263	60.4	-3.8
6	19245.00	44.6 AV	54.0	-9.4	3.83 H	263	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.3 PK			1.62 V	208	115.9	6.4
2	*6415.00	112.4 AV			1.62 V	208	106.0	6.4
3	#12830.00	51.3 PK	88.2	-36.9	3.19 V	335	38.3	13.0
4	#12830.00	38.3 AV	68.2	-29.9	3.19 V	335	25.3	13.0
5	19245.00	54.7 PK	74.0	-19.3	3.57 V	130	58.5	-3.8
6	19245.00	41.6 AV	54.0	-12.4	3.57 V	130	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.6 PK			1.08 H	236	95.2	6.4
2	*6435.00	90.9 AV			1.08 H	236	84.5	6.4
3	#12870.00	51.1 PK	88.2	-37.1	3.84 H	360	38.1	13.0
4	#12870.00	39.2 AV	68.2	-29.0	3.84 H	360	26.2	13.0
5	19305.00	57.0 PK	74.0	-17.0	3.95 H	263	60.7	-3.7
6	19305.00	44.9 AV	54.0	-9.1	3.95 H	263	48.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.4 PK			2.21 V	170	97.0	6.4
2	*6435.00	92.3 AV			2.21 V	170	85.9	6.4
3	#12870.00	49.9 PK	88.2	-38.3	3.28 V	335	36.9	13.0
4	#12870.00	37.4 AV	68.2	-30.8	3.28 V	335	24.4	13.0
5	19305.00	55.6 PK	74.0	-18.4	3.53 V	114	59.3	-3.7
6	19305.00	43.4 AV	54.0	-10.6	3.53 V	114	47.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.4 PK			2.25 H	141	113.8	6.6
2	*6475.00	111.0 AV			2.25 H	141	104.4	6.6
3	#12950.00	51.2 PK	88.2	-37.0	3.79 H	360	38.1	13.1
4	#12950.00	38.8 AV	68.2	-29.4	3.79 H	360	25.7	13.1
5	19425.00	57.0 PK	74.0	-17.0	3.80 H	273	60.8	-3.8
6	19425.00	45.1 AV	54.0	-8.9	3.80 H	273	48.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.6 PK			1.67 V	203	115.0	6.6
2	*6475.00	111.6 AV			1.67 V	203	105.0	6.6
3	#12950.00	50.6 PK	88.2	-37.6	3.29 V	324	37.5	13.1
4	#12950.00	38.1 AV	68.2	-30.1	3.29 V	324	25.0	13.1
5	19425.00	54.6 PK	74.0	-19.4	3.55 V	117	58.4	-3.8
6	19425.00	41.6 AV	54.0	-12.4	3.55 V	117	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.0 PK			1.05 H	249	95.1	6.9
2	*6515.00	91.4 AV			1.05 H	249	84.5	6.9
3	#13030.00	50.5 PK	88.2	-37.7	3.76 H	338	37.3	13.2
4	#13030.00	38.8 AV	68.2	-29.4	3.76 H	338	25.6	13.2
5	19545.00	56.7 PK	74.0	-17.3	4.00 H	236	60.8	-4.1
6	19545.00	45.1 AV	54.0	-8.9	4.00 H	236	49.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.2 PK			2.07 V	179	97.3	6.9
2	*6515.00	92.9 AV			2.07 V	179	86.0	6.9
3	#13030.00	50.5 PK	88.2	-37.7	3.34 V	321	37.3	13.2
4	#13030.00	37.8 AV	68.2	-30.4	3.34 V	321	24.6	13.2
5	19545.00	55.5 PK	74.0	-18.5	3.53 V	129	59.6	-4.1
6	19545.00	43.2 AV	54.0	-10.8	3.53 V	129	47.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.0 PK			2.24 H	135	114.1	6.9
2	*6535.00	111.8 AV			2.24 H	135	104.9	6.9
3	#13070.00	51.0 PK	88.2	-37.2	3.80 H	360	37.8	13.2
4	#13070.00	38.9 AV	68.2	-29.3	3.80 H	360	25.7	13.2
5	19605.00	57.0 PK	74.0	-17.0	3.89 H	266	61.0	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.89 H	266	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.3 PK			1.58 V	206	115.4	6.9
2	*6535.00	112.2 AV			1.58 V	206	105.3	6.9
3	#13070.00	50.7 PK	88.2	-37.5	3.28 V	335	37.5	13.2
4	#13070.00	38.1 AV	68.2	-30.1	3.28 V	335	24.9	13.2
5	19605.00	54.8 PK	74.0	-19.2	3.53 V	108	58.8	-4.0
6	19605.00	42.0 AV	54.0	-12.0	3.53 V	108	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			2.27 H	120	112.6	7.2
2	*6695.00	110.9 AV			2.27 H	120	103.7	7.2
3	13390.00	51.1 PK	74.0	-22.9	3.87 H	360	37.1	14.0
4	13390.00	38.5 AV	54.0	-15.5	3.87 H	360	24.5	14.0
5	20085.00	56.5 PK	74.0	-17.5	3.80 H	282	60.0	-3.5
6	20085.00	44.9 AV	54.0	-9.1	3.80 H	282	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.7 PK			1.62 V	197	114.5	7.2
2	*6695.00	111.9 AV			1.62 V	197	104.7	7.2
3	13390.00	50.9 PK	74.0	-23.1	3.26 V	340	36.9	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.26 V	340	24.0	14.0
5	20085.00	54.4 PK	74.0	-19.6	3.61 V	126	57.9	-3.5
6	20085.00	41.4 AV	54.0	-12.6	3.61 V	126	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.7 PK			2.26 H	135	113.5	7.2
2	*6855.00	111.6 AV			2.26 H	135	104.4	7.2
3	#13710.00	51.5 PK	88.2	-36.7	3.89 H	360	36.3	15.2
4	#13710.00	39.2 AV	68.2	-29.0	3.89 H	360	24.0	15.2
5	20565.00	56.0 PK	74.0	-18.0	3.82 H	289	59.3	-3.3
6	20565.00	44.5 AV	54.0	-9.5	3.82 H	289	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.3 PK			1.57 V	205	115.1	7.2
2	*6855.00	112.2 AV			1.57 V	205	105.0	7.2
3	#13710.00	50.8 PK	88.2	-37.4	3.23 V	330	35.6	15.2
4	#13710.00	38.2 AV	68.2	-30.0	3.23 V	330	23.0	15.2
5	20565.00	54.2 PK	74.0	-19.8	3.54 V	116	57.5	-3.3
6	20565.00	41.4 AV	54.0	-12.6	3.54 V	116	44.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.9 PK			1.03 H	237	94.7	7.2
2	*6875.00	91.3 AV			1.03 H	237	84.1	7.2
3	#13750.00	50.7 PK	88.2	-37.5	3.79 H	353	35.6	15.1
4	#13750.00	38.7 AV	68.2	-29.5	3.79 H	353	23.6	15.1
5	20625.00	56.1 PK	74.0	-17.9	4.00 H	240	59.4	-3.3
6	20625.00	44.5 AV	54.0	-9.5	4.00 H	240	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.0 PK			2.25 V	166	96.8	7.2
2	*6875.00	92.7 AV			2.25 V	166	85.5	7.2
3	#13750.00	50.1 PK	88.2	-38.1	3.34 V	339	35.0	15.1
4	#13750.00	37.7 AV	68.2	-30.5	3.34 V	339	22.6	15.1
5	20625.00	55.6 PK	74.0	-18.4	3.54 V	116	58.9	-3.3
6	20625.00	43.5 AV	54.0	-10.5	3.54 V	116	46.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.9 PK			1.05 H	248	93.9	8.0
2	*6995.00	91.2 AV			1.05 H	248	83.2	8.0
3	#13990.00	51.0 PK	88.2	-37.2	3.78 H	349	35.4	15.6
4	#13990.00	38.9 AV	68.2	-29.3	3.78 H	349	23.3	15.6
5	20985.00	56.9 PK	74.0	-17.1	4.00 H	266	59.7	-2.8
6	20985.00	45.1 AV	54.0	-8.9	4.00 H	266	47.9	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.0 PK			2.25 V	181	95.0	8.0
2	*6995.00	91.8 AV			2.25 V	181	83.8	8.0
3	#13990.00	50.7 PK	88.2	-37.5	3.32 V	325	35.1	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.32 V	325	22.6	15.6
5	20985.00	56.0 PK	74.0	-18.0	3.54 V	142	58.8	-2.8
6	20985.00	43.4 AV	54.0	-10.6	3.54 V	142	46.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.8 PK			3.85 H	134	91.3	9.5
2	*7115.00	90.4 AV			3.85 H	134	80.9	9.5
3	#7125.00	85.8 PK	88.2	-2.4	3.85 H	134	76.4	9.4
4	#7125.00	57.2 AV	68.2	-11.0	3.85 H	134	47.8	9.4
5	7250.00	55.9 PK	74.0	-18.1	3.85 H	134	47.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	3.85 H	134	34.8	8.7
7	#14230.00	51.6 PK	88.2	-36.6	3.75 H	344	36.3	15.3
8	#14230.00	39.6 AV	68.2	-28.6	3.75 H	344	24.3	15.3
9	21345.00	56.0 PK	74.0	-18.0	4.00 H	248	57.6	-1.6
10	21345.00	44.3 AV	54.0	-9.7	4.00 H	248	45.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			1.92 V	175	93.0	8.3
2	*7115.00	91.0 AV			1.92 V	175	82.7	8.3
3	#7125.00	86.0 PK	88.2	-2.2	1.92 V	175	77.8	8.2
4	#7125.00	58.0 AV	68.2	-10.2	1.92 V	175	49.8	8.2
5	7250.00	55.7 PK	74.0	-18.3	1.92 V	175	48.1	7.6
6	7250.00	43.4 AV	54.0	-10.6	1.92 V	175	35.8	7.6
7	#14230.00	49.9 PK	88.2	-38.3	3.29 V	338	36.0	13.9
8	#14230.00	37.8 AV	68.2	-30.4	3.29 V	338	23.9	13.9
9	21345.00	55.9 PK	74.0	-18.1	3.53 V	117	55.9	0.0
10	21345.00	43.8 AV	54.0	-10.2	3.53 V	117	43.8	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	2.25 H	124	69.4	4.3
2	#5925.00	55.9 AV	68.2	-12.3	2.25 H	124	51.6	4.3
3	*5955.00	119.3 PK			2.25 H	124	114.8	4.5
4	*5955.00	108.3 AV			2.25 H	124	103.8	4.5
5	11910.00	51.7 PK	74.0	-22.3	3.91 H	360	39.5	12.2
6	11910.00	39.1 AV	54.0	-14.9	3.91 H	360	26.9	12.2
7	17865.00	56.5 PK	74.0	-17.5	3.80 H	302	34.6	21.9
8	17865.00	44.9 AV	54.0	-9.1	3.80 H	302	23.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	1.47 V	198	70.4	4.3
2	#5925.00	57.5 AV	68.2	-10.7	1.47 V	198	53.2	4.3
3	*5955.00	119.9 PK			1.47 V	198	115.4	4.5
4	*5955.00	109.8 AV			1.47 V	198	105.3	4.5
5	11910.00	50.8 PK	74.0	-23.2	3.23 V	343	38.6	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.23 V	343	26.1	12.2
7	17865.00	54.0 PK	74.0	-20.0	3.53 V	130	32.1	21.9
8	17865.00	41.3 AV	54.0	-12.7	3.53 V	130	19.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			2.27 H	130	114.7	4.8
2	*6195.00	108.7 AV			2.27 H	130	103.9	4.8
3	12390.00	51.9 PK	74.0	-22.1	3.93 H	357	39.6	12.3
4	12390.00	39.5 AV	54.0	-14.5	3.93 H	357	27.2	12.3
5	18585.00	56.7 PK	74.0	-17.3	3.82 H	300	61.7	-5.0
6	18585.00	45.1 AV	54.0	-8.9	3.82 H	300	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			1.48 V	199	115.1	4.8
2	*6195.00	109.7 AV			1.48 V	199	104.9	4.8
3	12390.00	50.7 PK	74.0	-23.3	3.28 V	346	38.4	12.3
4	12390.00	38.0 AV	54.0	-16.0	3.28 V	346	25.7	12.3
5	18585.00	53.4 PK	74.0	-20.6	3.53 V	127	58.4	-5.0
6	18585.00	41.0 AV	54.0	-13.0	3.53 V	127	46.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.5 PK			2.24 H	129	113.1	6.4
2	*6415.00	108.4 AV			2.24 H	129	102.0	6.4
3	#12830.00	51.6 PK	88.2	-36.6	3.88 H	360	38.6	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.88 H	360	25.8	13.0
5	19245.00	56.1 PK	74.0	-17.9	3.79 H	314	59.9	-3.8
6	19245.00	44.4 AV	54.0	-9.6	3.79 H	314	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.9 PK			1.51 V	213	113.5	6.4
2	*6415.00	109.9 AV			1.51 V	213	103.5	6.4
3	#12830.00	51.3 PK	88.2	-36.9	3.25 V	334	38.3	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.25 V	334	25.8	13.0
5	19245.00	53.6 PK	74.0	-20.4	3.52 V	114	57.4	-3.8
6	19245.00	40.9 AV	54.0	-13.1	3.52 V	114	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	105.2 PK			2.65 H	87	98.8	6.4
2	*6435.00	93.3 AV			2.65 H	87	86.9	6.4
3	#12870.00	50.8 PK	88.2	-37.4	3.80 H	349	37.8	13.0
4	#12870.00	38.7 AV	68.2	-29.5	3.80 H	349	25.7	13.0
5	19305.00	56.5 PK	74.0	-17.5	4.00 H	237	60.2	-3.7
6	19305.00	44.7 AV	54.0	-9.3	4.00 H	237	48.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.6 PK			2.12 V	178	98.2	6.4
2	*6435.00	92.7 AV			2.12 V	178	86.3	6.4
3	#12870.00	50.1 PK	88.2	-38.1	3.31 V	338	37.1	13.0
4	#12870.00	37.5 AV	68.2	-30.7	3.31 V	338	24.5	13.0
5	19305.00	55.8 PK	74.0	-18.2	3.60 V	134	59.5	-3.7
6	19305.00	43.5 AV	54.0	-10.5	3.60 V	134	47.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.8 PK			2.20 H	115	112.2	6.6
2	*6475.00	107.9 AV			2.20 H	115	101.3	6.6
3	#12950.00	51.3 PK	88.2	-36.9	3.91 H	360	38.2	13.1
4	#12950.00	38.9 AV	68.2	-29.3	3.91 H	360	25.8	13.1
5	19425.00	56.5 PK	74.0	-17.5	3.84 H	313	60.3	-3.8
6	19425.00	44.9 AV	54.0	-9.1	3.84 H	313	48.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.0 PK			1.51 V	194	113.4	6.6
2	*6475.00	110.0 AV			1.51 V	194	103.4	6.6
3	#12950.00	50.5 PK	88.2	-37.7	3.28 V	345	37.4	13.1
4	#12950.00	38.0 AV	68.2	-30.2	3.28 V	345	24.9	13.1
5	19425.00	54.4 PK	74.0	-19.6	3.58 V	123	58.2	-3.8
6	19425.00	41.4 AV	54.0	-12.6	3.58 V	123	45.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.0 PK			2.73 H	85	98.1	6.9
2	*6515.00	93.2 AV			2.73 H	85	86.3	6.9
3	#13030.00	50.7 PK	88.2	-37.5	3.80 H	358	37.5	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.80 H	358	25.5	13.2
5	19545.00	56.9 PK	74.0	-17.1	3.94 H	262	61.0	-4.1
6	19545.00	44.9 AV	54.0	-9.1	3.94 H	262	49.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	105.1 PK			2.12 V	176	98.2	6.9
2	*6515.00	93.0 AV			2.12 V	176	86.1	6.9
3	#13030.00	49.9 PK	88.2	-38.3	3.28 V	340	36.7	13.2
4	#13030.00	37.5 AV	68.2	-30.7	3.28 V	340	24.3	13.2
5	19545.00	55.3 PK	74.0	-18.7	3.58 V	140	59.4	-4.1
6	19545.00	43.3 AV	54.0	-10.7	3.58 V	140	47.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.0 PK			2.29 H	118	112.1	6.9
2	*6535.00	108.2 AV			2.29 H	118	101.3	6.9
3	#13070.00	51.5 PK	88.2	-36.7	3.93 H	359	38.3	13.2
4	#13070.00	39.2 AV	68.2	-29.0	3.93 H	359	26.0	13.2
5	19605.00	56.9 PK	74.0	-17.1	3.81 H	297	60.9	-4.0
6	19605.00	45.1 AV	54.0	-8.9	3.81 H	297	49.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.5 PK			1.52 V	182	112.6	6.9
2	*6535.00	109.6 AV			1.52 V	182	102.7	6.9
3	#13070.00	50.6 PK	88.2	-37.6	3.18 V	330	37.4	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.18 V	330	24.7	13.2
5	19605.00	54.0 PK	74.0	-20.0	3.48 V	123	58.0	-4.0
6	19605.00	41.6 AV	54.0	-12.4	3.48 V	123	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			2.26 H	108	111.7	7.2
2	*6695.00	107.9 AV			2.26 H	108	100.7	7.2
3	13390.00	51.7 PK	74.0	-22.3	3.88 H	357	37.7	14.0
4	13390.00	39.0 AV	54.0	-15.0	3.88 H	357	25.0	14.0
5	20085.00	56.1 PK	74.0	-17.9	3.78 H	299	59.6	-3.5
6	20085.00	44.6 AV	54.0	-9.4	3.78 H	299	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			1.50 V	200	112.6	7.2
2	*6695.00	109.8 AV			1.50 V	200	102.6	7.2
3	13390.00	50.8 PK	74.0	-23.2	3.17 V	328	36.8	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.17 V	328	24.0	14.0
5	20085.00	54.2 PK	74.0	-19.8	3.51 V	138	57.7	-3.5
6	20085.00	41.5 AV	54.0	-12.5	3.51 V	138	45.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.1 PK			2.20 H	109	111.9	7.2
2	*6855.00	108.1 AV			2.20 H	109	100.9	7.2
3	#13710.00	52.1 PK	88.2	-36.1	3.90 H	360	36.9	15.2
4	#13710.00	39.5 AV	68.2	-28.7	3.90 H	360	24.3	15.2
5	20565.00	56.5 PK	74.0	-17.5	3.85 H	290	59.8	-3.3
6	20565.00	45.1 AV	54.0	-8.9	3.85 H	290	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.2 PK			1.41 V	208	113.0	7.2
2	*6855.00	110.0 AV			1.41 V	208	102.8	7.2
3	#13710.00	50.9 PK	88.2	-37.3	3.23 V	334	35.7	15.2
4	#13710.00	38.3 AV	68.2	-29.9	3.23 V	334	23.1	15.2
5	20565.00	54.1 PK	74.0	-19.9	3.49 V	144	57.4	-3.3
6	20565.00	41.1 AV	54.0	-12.9	3.49 V	144	44.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.7 PK			2.71 H	98	97.5	7.2
2	*6875.00	92.8 AV			2.71 H	98	85.6	7.2
3	#13750.00	51.5 PK	88.2	-36.7	3.85 H	350	36.4	15.1
4	#13750.00	39.4 AV	68.2	-28.8	3.85 H	350	24.3	15.1
5	20625.00	56.6 PK	74.0	-17.4	4.00 H	241	59.9	-3.3
6	20625.00	44.7 AV	54.0	-9.3	4.00 H	241	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	105.2 PK			2.15 V	178	98.0	7.2
2	*6875.00	92.9 AV			2.15 V	178	85.7	7.2
3	#13750.00	49.8 PK	88.2	-38.4	3.25 V	316	34.7	15.1
4	#13750.00	37.5 AV	68.2	-30.7	3.25 V	316	22.4	15.1
5	20625.00	56.5 PK	74.0	-17.5	3.56 V	144	59.8	-3.3
6	20625.00	44.0 AV	54.0	-10.0	3.56 V	144	47.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.8 PK			2.68 H	98	96.8	8.0
2	*6995.00	92.9 AV			2.68 H	98	84.9	8.0
3	#13990.00	50.7 PK	88.2	-37.5	3.80 H	359	35.1	15.6
4	#13990.00	39.0 AV	68.2	-29.2	3.80 H	359	23.4	15.6
5	20985.00	56.1 PK	74.0	-17.9	3.97 H	240	58.9	-2.8
6	20985.00	44.5 AV	54.0	-9.5	3.97 H	240	47.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	105.6 PK			2.09 V	160	97.6	8.0
2	*6995.00	93.4 AV			2.09 V	160	85.4	8.0
3	#13990.00	50.2 PK	88.2	-38.0	3.29 V	336	34.6	15.6
4	#13990.00	38.0 AV	68.2	-30.2	3.29 V	336	22.4	15.6
5	20985.00	56.0 PK	74.0	-18.0	3.59 V	139	58.8	-2.8
6	20985.00	43.4 AV	54.0	-10.6	3.59 V	139	46.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			2.72 H	109	92.8	9.5
2	*7115.00	89.8 AV			2.72 H	109	80.3	9.5
3	#7125.00	86.2 PK	88.2	-2.0	2.72 H	109	76.8	9.4
4	#7125.00	56.0 AV	68.2	-12.2	2.72 H	109	46.6	9.4
5	7250.00	54.8 PK	74.0	-19.2	2.72 H	109	46.1	8.7
6	7250.00	43.5 AV	54.0	-10.5	2.72 H	109	34.8	8.7
7	#14230.00	51.2 PK	88.2	-37.0	3.80 H	355	35.9	15.3
8	#14230.00	39.5 AV	68.2	-28.7	3.80 H	355	24.2	15.3
9	21345.00	56.6 PK	74.0	-17.4	4.00 H	245	58.2	-1.6
10	21345.00	44.6 AV	54.0	-9.4	4.00 H	245	46.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.2 PK			2.11 V	150	91.7	9.5
2	*7115.00	90.1 AV			2.11 V	150	80.6	9.5
3	#7125.00	86.0 PK	88.2	-2.2	2.11 V	150	76.6	9.4
4	#7125.00	56.0 AV	68.2	-12.2	2.11 V	150	46.6	9.4
5	7250.00	55.5 PK	74.0	-18.5	2.11 V	150	46.8	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.11 V	150	35.0	8.7
7	#14230.00	50.0 PK	88.2	-38.2	3.32 V	319	34.7	15.3
8	#14230.00	37.8 AV	68.2	-30.4	3.32 V	319	22.5	15.3
9	21345.00	56.2 PK	74.0	-17.8	3.59 V	114	57.8	-1.6
10	21345.00	43.8 AV	54.0	-10.2	3.59 V	114	45.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	2.25 H	127	72.2	4.3
2	#5925.00	56.9 AV	68.2	-11.3	2.25 H	127	52.6	4.3
3	*5955.00	121.0 PK			2.25 H	127	116.5	4.5
4	*5955.00	110.3 AV			2.25 H	127	105.8	4.5
5	11910.00	58.9 PK	74.0	-15.1	3.86 H	360	46.7	12.2
6	11910.00	49.3 AV	54.0	-4.7	3.86 H	360	37.1	12.2
7	17865.00	56.9 PK	74.0	-17.1	3.61 H	37	35.0	21.9
8	17865.00	44.9 AV	54.0	-9.1	3.61 H	37	23.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.5 PK	88.2	-9.7	2.11 V	161	74.2	4.3
2	#5925.00	53.2 AV	68.2	-15.0	2.11 V	161	48.9	4.3
3	*5955.00	121.9 PK			2.11 V	161	117.4	4.5
4	*5955.00	110.9 AV			2.11 V	161	106.4	4.5
5	11910.00	57.5 PK	74.0	-16.5	3.60 V	71	45.3	12.2
6	11910.00	47.4 AV	54.0	-6.6	3.60 V	71	35.2	12.2
7	17865.00	54.9 PK	74.0	-19.1	1.45 V	326	33.0	21.9
8	17865.00	43.7 AV	54.0	-10.3	1.45 V	326	21.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.1 PK			3.10 H	243	97.5	6.6
2	*6475.00	93.5 AV			3.10 H	243	86.9	6.6
3	#12950.00	51.2 PK	88.2	-37.0	3.81 H	354	38.1	13.1
4	#12950.00	39.0 AV	68.2	-29.2	3.81 H	354	25.9	13.1
5	19425.00	55.8 PK	74.0	-18.2	3.96 H	237	59.6	-3.8
6	19425.00	44.0 AV	54.0	-10.0	3.96 H	237	47.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.8 PK			2.09 V	179	97.2	6.6
2	*6475.00	93.3 AV			2.09 V	179	86.7	6.6
3	#12950.00	48.8 PK	88.2	-39.4	3.26 V	350	35.7	13.1
4	#12950.00	36.8 AV	68.2	-31.4	3.26 V	350	23.7	13.1
5	19425.00	55.9 PK	74.0	-18.1	3.57 V	123	59.7	-3.8
6	19425.00	43.8 AV	54.0	-10.2	3.57 V	123	47.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.4 PK			3.11 H	249	97.2	7.2
2	*6695.00	93.7 AV			3.11 H	249	86.5	7.2
3	13390.00	51.4 PK	74.0	-22.6	3.77 H	347	37.4	14.0
4	13390.00	39.4 AV	54.0	-14.6	3.77 H	347	25.4	14.0
5	20085.00	55.8 PK	74.0	-18.2	3.94 H	225	59.3	-3.5
6	20085.00	43.8 AV	54.0	-10.2	3.94 H	225	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.5 PK			2.03 V	190	96.3	7.2
2	*6695.00	93.1 AV			2.03 V	190	85.9	7.2
3	13390.00	48.3 PK	74.0	-25.7	3.29 V	360	34.3	14.0
4	13390.00	36.4 AV	54.0	-17.6	3.29 V	360	22.4	14.0
5	20085.00	56.3 PK	74.0	-17.7	3.56 V	108	59.8	-3.5
6	20085.00	43.9 AV	54.0	-10.1	3.56 V	108	47.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.8 PK			3.15 H	232	94.3	9.5
2	*7115.00	93.2 AV			3.15 H	232	83.7	9.5
3	#7125.00	68.2 PK	88.2	-20.0	3.15 H	232	58.8	9.4
4	#7125.00	45.8 AV	68.2	-22.4	3.15 H	232	36.4	9.4
5	7250.00	55.2 PK	74.0	-18.8	3.15 H	232	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	3.15 H	232	34.7	8.7
7	#14230.00	50.8 PK	88.2	-37.4	3.85 H	345	35.5	15.3
8	#14230.00	38.8 AV	68.2	-29.4	3.85 H	345	23.5	15.3
9	21345.00	56.0 PK	74.0	-18.0	3.97 H	245	57.6	-1.6
10	21345.00	44.1 AV	54.0	-9.9	3.97 H	245	45.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.9 PK			2.11 V	174	94.4	9.5
2	*7115.00	93.3 AV			2.11 V	174	83.8	9.5
3	#7125.00	69.2 PK	88.2	-19.0	2.11 V	174	59.8	9.4
4	#7125.00	45.9 AV	68.2	-22.3	2.11 V	174	36.5	9.4
5	7250.00	56.0 PK	74.0	-18.0	2.11 V	174	47.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	2.11 V	174	34.8	8.7
7	#14230.00	49.4 PK	88.2	-38.8	3.27 V	335	34.1	15.3
8	#14230.00	37.2 AV	68.2	-31.0	3.27 V	335	21.9	15.3
9	21345.00	55.6 PK	74.0	-18.4	3.52 V	124	57.2	-1.6
10	21345.00	43.5 AV	54.0	-10.5	3.52 V	124	45.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.0 PK	88.2	-13.2	2.25 H	128	70.7	4.3
2	#5925.00	56.6 AV	68.2	-11.6	2.25 H	128	52.3	4.3
3	*5955.00	118.6 PK			2.25 H	128	114.1	4.5
4	*5955.00	108.3 AV			2.25 H	128	103.8	4.5
5	11910.00	58.4 PK	74.0	-15.6	3.91 H	346	46.2	12.2
6	11910.00	48.8 AV	54.0	-5.2	3.91 H	346	36.6	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.66 H	16	35.3	21.9
8	17865.00	45.3 AV	54.0	-8.7	3.66 H	16	23.4	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	2.20 V	179	65.8	4.3
2	#5925.00	55.6 AV	68.2	-12.6	2.20 V	179	51.3	4.3
3	*5955.00	119.1 PK			2.20 V	179	114.6	4.5
4	*5955.00	109.1 AV			2.20 V	179	104.6	4.5
5	11910.00	57.8 PK	74.0	-16.2	3.57 V	67	45.6	12.2
6	11910.00	47.3 AV	54.0	-6.7	3.57 V	67	35.1	12.2
7	17865.00	55.0 PK	74.0	-19.0	1.47 V	325	33.1	21.9
8	17865.00	43.6 AV	54.0	-10.4	1.47 V	325	21.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.5 PK			2.67 H	119	93.9	6.6
2	*6475.00	90.4 AV			2.67 H	119	83.8	6.6
3	#12950.00	51.0 PK	88.2	-37.2	3.76 H	360	37.9	13.1
4	#12950.00	39.4 AV	68.2	-28.8	3.76 H	360	26.3	13.1
5	19425.00	55.5 PK	74.0	-18.5	3.99 H	259	59.3	-3.8
6	19425.00	43.7 AV	54.0	-10.3	3.99 H	259	47.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.1 PK			2.16 V	140	95.5	6.6
2	*6475.00	90.7 AV			2.16 V	140	84.1	6.6
3	#12950.00	51.0 PK	88.2	-37.2	3.38 V	360	37.9	13.1
4	#12950.00	38.2 AV	68.2	-30.0	3.38 V	360	25.1	13.1
5	19425.00	55.6 PK	74.0	-18.4	3.55 V	137	59.4	-3.8
6	19425.00	43.5 AV	54.0	-10.5	3.55 V	137	47.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	100.0 PK			2.70 H	120	92.8	7.2
2	*6695.00	90.0 AV			2.70 H	120	82.8	7.2
3	13390.00	51.2 PK	74.0	-22.8	3.76 H	360	37.2	14.0
4	13390.00	39.4 AV	54.0	-14.6	3.76 H	360	25.4	14.0
5	20085.00	54.9 PK	74.0	-19.1	3.96 H	258	58.4	-3.5
6	20085.00	43.3 AV	54.0	-10.7	3.96 H	258	46.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.8 PK			2.22 V	136	95.6	7.2
2	*6695.00	91.1 AV			2.22 V	136	83.9	7.2
3	13390.00	51.3 PK	74.0	-22.7	3.37 V	360	37.3	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.37 V	360	24.6	14.0
5	20085.00	55.8 PK	74.0	-18.2	3.50 V	127	59.3	-3.5
6	20085.00	43.8 AV	54.0	-10.2	3.50 V	127	47.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.6 PK			2.62 H	107	91.1	9.5
2	*7115.00	90.6 AV			2.62 H	107	81.1	9.5
3	#7125.00	86.0 PK	88.2	-2.2	2.62 H	107	76.6	9.4
4	#7125.00	57.6 AV	68.2	-10.6	2.62 H	107	48.2	9.4
5	7250.00	54.8 PK	74.0	-19.2	2.62 H	107	46.1	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.62 H	107	35.0	8.7
7	#14230.00	51.0 PK	88.2	-37.2	3.76 H	354	35.7	15.3
8	#14230.00	39.1 AV	68.2	-29.1	3.76 H	354	23.8	15.3
9	21345.00	56.0 PK	74.0	-18.0	4.00 H	249	57.6	-1.6
10	21345.00	44.2 AV	54.0	-9.8	4.00 H	249	45.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.9 PK			2.11 V	150	92.4	9.5
2	*7115.00	90.7 AV			2.11 V	150	81.2	9.5
3	#7125.00	86.2 PK	88.2	-2.0	2.11 V	150	76.8	9.4
4	#7125.00	58.3 AV	68.2	-9.9	2.11 V	150	48.9	9.4
5	7250.00	55.9 PK	74.0	-18.1	2.11 V	150	47.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	2.11 V	150	34.8	8.7
7	#14230.00	50.6 PK	88.2	-37.6	3.33 V	344	35.3	15.3
8	#14230.00	37.9 AV	68.2	-30.3	3.33 V	344	22.6	15.3
9	21345.00	56.1 PK	74.0	-17.9	3.55 V	133	57.7	-1.6
10	21345.00	43.7 AV	54.0	-10.3	3.55 V	133	45.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	2.30 H	128	73.1	4.3
2	#5925.00	64.3 AV	68.2	-3.9	2.30 H	128	60.0	4.3
3	*5985.00	109.8 PK			2.30 H	128	105.4	4.4
4	*5985.00	98.8 AV			2.30 H	128	94.4	4.4
5	11970.00	58.3 PK	74.0	-15.7	3.84 H	357	46.1	12.2
6	11970.00	48.6 AV	54.0	-5.4	3.84 H	357	36.4	12.2
7	17955.00	57.6 PK	74.0	-16.4	3.63 H	27	34.2	23.4
8	17955.00	45.1 AV	54.0	-8.9	3.63 H	27	21.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.7 PK	88.2	-11.5	2.18 V	178	72.4	4.3
2	#5925.00	64.3 AV	68.2	-3.9	2.18 V	178	60.0	4.3
3	*5985.00	109.9 PK			2.18 V	178	105.5	4.4
4	*5985.00	99.1 AV			2.18 V	178	94.7	4.4
5	11970.00	57.6 PK	74.0	-16.4	3.61 V	75	45.4	12.2
6	11970.00	47.4 AV	54.0	-6.6	3.61 V	75	35.2	12.2
7	17955.00	54.6 PK	74.0	-19.4	1.46 V	322	31.2	23.4
8	17955.00	43.2 AV	54.0	-10.8	1.46 V	322	19.8	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	104.7 PK			2.62 H	246	98.2	6.5
2	*6465.00	92.6 AV			2.62 H	246	86.1	6.5
3	#12930.00	50.9 PK	88.2	-37.3	3.79 H	351	37.8	13.1
4	#12930.00	38.6 AV	68.2	-29.6	3.79 H	351	25.5	13.1
5	19395.00	57.0 PK	74.0	-17.0	4.00 H	234	60.7	-3.7
6	19395.00	44.7 AV	54.0	-9.3	4.00 H	234	48.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	104.7 PK			2.10 V	157	98.2	6.5
2	*6465.00	92.7 AV			2.10 V	157	86.2	6.5
3	#12930.00	49.6 PK	88.2	-38.6	3.29 V	343	36.5	13.1
4	#12930.00	37.4 AV	68.2	-30.8	3.29 V	343	24.3	13.1
5	19395.00	56.6 PK	74.0	-17.4	3.58 V	123	60.3	-3.7
6	19395.00	44.2 AV	54.0	-9.8	3.58 V	123	47.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.0 PK			2.65 H	251	97.8	7.2
2	*6705.00	92.9 AV			2.65 H	251	85.7	7.2
3	#13410.00	50.9 PK	88.2	-37.3	3.79 H	354	36.7	14.2
4	#13410.00	38.5 AV	68.2	-29.7	3.79 H	354	24.3	14.2
5	20115.00	56.7 PK	74.0	-17.3	3.96 H	238	60.2	-3.5
6	20115.00	44.5 AV	54.0	-9.5	3.96 H	238	48.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.1 PK			2.07 V	156	97.9	7.2
2	*6705.00	93.2 AV			2.07 V	156	86.0	7.2
3	#13410.00	49.6 PK	88.2	-38.6	3.28 V	329	35.4	14.2
4	#13410.00	37.7 AV	68.2	-30.5	3.28 V	329	23.5	14.2
5	20115.00	57.0 PK	74.0	-17.0	3.54 V	125	60.5	-3.5
6	20115.00	44.6 AV	54.0	-9.4	3.54 V	125	48.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.5 PK			2.67 H	234	96.1	8.4
2	*7025.00	92.3 AV			2.67 H	234	83.9	8.4
3	#7125.00	60.2 PK	88.2	-28.0	2.67 H	234	50.8	9.4
4	#7125.00	46.9 AV	68.2	-21.3	2.67 H	234	37.5	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.67 H	234	46.5	8.7
6	7250.00	43.6 AV	54.0	-10.4	2.67 H	234	34.9	8.7
7	#14050.00	51.1 PK	88.2	-37.1	3.77 H	360	35.6	15.5
8	#14050.00	39.0 AV	68.2	-29.2	3.77 H	360	23.5	15.5
9	21075.00	57.1 PK	74.0	-16.9	3.99 H	244	59.3	-2.2
10	21075.00	45.0 AV	54.0	-9.0	3.99 H	244	47.2	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.8 PK			2.12 V	148	96.4	8.4
2	*7025.00	93.0 AV			2.12 V	148	84.6	8.4
3	#7125.00	59.7 PK	88.2	-28.5	2.12 V	148	50.3	9.4
4	#7125.00	46.4 AV	68.2	-21.8	2.12 V	148	37.0	9.4
5	7250.00	55.0 PK	74.0	-19.0	2.12 V	148	46.3	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.12 V	148	35.0	8.7
7	#14050.00	49.8 PK	88.2	-38.4	3.30 V	332	34.3	15.5
8	#14050.00	37.4 AV	68.2	-30.8	3.30 V	332	21.9	15.5
9	21075.00	56.4 PK	74.0	-17.6	3.53 V	122	58.6	-2.2
10	21075.00	44.1 AV	54.0	-9.9	3.53 V	122	46.3	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.4 PK	88.2	-9.8	2.31 H	128	74.1	4.3
2	#5925.00	65.2 AV	68.2	-3.0	2.31 H	128	60.9	4.3
3	*6025.00	107.4 PK			2.31 H	128	103.2	4.2
4	*6025.00	95.6 AV			2.31 H	128	91.4	4.2
5	12050.00	59.3 PK	74.0	-14.7	3.84 H	344	46.9	12.4
6	12050.00	49.4 AV	54.0	-4.6	3.84 H	344	37.0	12.4
7	18075.00	57.3 PK	74.0	-16.7	3.63 H	35	62.0	-4.7
8	18075.00	45.1 AV	54.0	-8.9	3.63 H	35	49.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.1 PK	88.2	-8.1	2.13 V	178	75.8	4.3
2	#5925.00	65.6 AV	68.2	-2.6	2.13 V	178	61.3	4.3
3	*6025.00	108.1 PK			2.13 V	178	103.9	4.2
4	*6025.00	95.6 AV			2.13 V	178	91.4	4.2
5	12050.00	58.1 PK	74.0	-15.9	3.64 V	64	45.7	12.4
6	12050.00	47.7 AV	54.0	-6.3	3.64 V	64	35.3	12.4
7	18075.00	55.0 PK	74.0	-19.0	1.55 V	320	59.7	-4.7
8	18075.00	43.7 AV	54.0	-10.3	1.55 V	320	48.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.9 PK			1.06 H	240	96.1	6.8
2	*6505.00	91.1 AV			1.06 H	240	84.3	6.8
3	#13010.00	51.4 PK	88.2	-36.8	3.71 H	346	38.2	13.2
4	#13010.00	39.5 AV	68.2	-28.7	3.71 H	346	26.3	13.2
5	19515.00	55.8 PK	74.0	-18.2	4.00 H	259	59.9	-4.1
6	19515.00	44.3 AV	54.0	-9.7	4.00 H	259	48.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.5 PK			1.27 V	32	96.7	6.8
2	*6505.00	92.0 AV			1.27 V	32	85.2	6.8
3	#13010.00	49.2 PK	88.2	-39.0	3.33 V	343	36.0	13.2
4	#13010.00	37.2 AV	68.2	-31.0	3.33 V	343	24.0	13.2
5	19515.00	56.1 PK	74.0	-17.9	3.52 V	131	60.2	-4.1
6	19515.00	43.8 AV	54.0	-10.2	3.52 V	131	47.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.0 PK			1.07 H	234	95.8	7.2
2	*6665.00	91.1 AV			1.07 H	234	83.9	7.2
3	13330.00	50.7 PK	74.0	-23.3	3.70 H	331	36.9	13.8
4	13330.00	39.0 AV	54.0	-15.0	3.70 H	331	25.2	13.8
5	19995.00	55.5 PK	74.0	-18.5	4.00 H	271	59.1	-3.6
6	19995.00	43.8 AV	54.0	-10.2	4.00 H	271	47.4	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.9 PK			1.29 V	19	95.7	7.2
2	*6665.00	91.5 AV			1.29 V	19	84.3	7.2
3	13330.00	49.7 PK	74.0	-24.3	3.34 V	329	35.9	13.8
4	13330.00	37.5 AV	54.0	-16.5	3.34 V	329	23.7	13.8
5	19995.00	56.1 PK	74.0	-17.9	3.58 V	126	59.7	-3.6
6	19995.00	43.7 AV	54.0	-10.3	3.58 V	126	47.3	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.7 PK			1.02 H	245	94.9	7.8
2	*6985.00	91.1 AV			1.02 H	245	83.3	7.8
3	#7125.00	71.3 PK	88.2	-16.9	1.02 H	245	61.9	9.4
4	#7125.00	55.0 AV	68.2	-13.2	1.02 H	245	45.6	9.4
5	7250.00	56.4 PK	74.0	-17.6	1.02 H	245	47.7	8.7
6	7250.00	44.9 AV	54.0	-9.1	1.02 H	245	36.2	8.7
7	#13970.00	51.2 PK	88.2	-37.0	3.75 H	360	35.7	15.5
8	#13970.00	39.2 AV	68.2	-29.0	3.75 H	360	23.7	15.5
9	20955.00	55.9 PK	74.0	-18.1	4.00 H	261	58.6	-2.7
10	20955.00	44.3 AV	54.0	-9.7	4.00 H	261	47.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.0 PK			1.31 V	28	95.2	7.8
2	*6985.00	91.6 AV			1.31 V	28	83.8	7.8
3	#7125.00	71.3 PK	88.2	-16.9	1.31 V	28	61.9	9.4
4	#7125.00	54.3 AV	68.2	-13.9	1.31 V	28	44.9	9.4
5	7250.00	56.6 PK	74.0	-17.4	1.31 V	28	47.9	8.7
6	7250.00	44.5 AV	54.0	-9.5	1.31 V	28	35.8	8.7
7	#13970.00	49.5 PK	88.2	-38.7	3.30 V	330	34.0	15.5
8	#13970.00	37.3 AV	68.2	-30.9	3.30 V	330	21.8	15.5
9	20955.00	56.6 PK	74.0	-17.4	3.57 V	119	59.3	-2.7
10	20955.00	44.1 AV	54.0	-9.9	3.57 V	119	46.8	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	2.30 H	118	72.9	4.3
2	#5925.00	62.3 AV	68.2	-5.9	2.30 H	118	58.0	4.3
3	*6025.00	106.8 PK			2.30 H	118	102.6	4.2
4	*6025.00	94.1 AV			2.30 H	118	89.9	4.2
5	12050.00	59.0 PK	74.0	-15.0	3.83 H	353	46.6	12.4
6	12050.00	49.2 AV	54.0	-4.8	3.83 H	353	36.8	12.4
7	18075.00	57.3 PK	74.0	-16.7	3.57 H	9	62.0	-4.7
8	18075.00	45.4 AV	54.0	-8.6	3.57 H	9	50.1	-4.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	2.11 V	178	73.3	4.3
2	#5925.00	63.3 AV	68.2	-4.9	2.11 V	178	59.0	4.3
3	*6025.00	107.0 PK			2.11 V	178	102.8	4.2
4	*6025.00	94.4 AV			2.11 V	178	90.2	4.2
5	12050.00	57.2 PK	74.0	-16.8	3.57 V	73	44.8	12.4
6	12050.00	47.2 AV	54.0	-6.8	3.57 V	73	34.8	12.4
7	18075.00	54.8 PK	74.0	-19.2	1.51 V	334	59.5	-4.7
8	18075.00	43.6 AV	54.0	-10.4	1.51 V	334	48.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.6 PK			1.06 H	245	94.8	6.8
2	*6505.00	90.6 AV			1.06 H	245	83.8	6.8
3	#13010.00	51.4 PK	88.2	-36.8	3.88 H	343	38.2	13.2
4	#13010.00	39.5 AV	68.2	-28.7	3.88 H	343	26.3	13.2
5	19515.00	56.0 PK	74.0	-18.0	4.00 H	221	60.1	-4.1
6	19515.00	44.4 AV	54.0	-9.6	4.00 H	221	48.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.9 PK			1.32 V	23	96.1	6.8
2	*6505.00	91.0 AV			1.32 V	23	84.2	6.8
3	#13010.00	50.5 PK	88.2	-37.7	3.29 V	326	37.3	13.2
4	#13010.00	38.0 AV	68.2	-30.2	3.29 V	326	24.8	13.2
5	19515.00	55.8 PK	74.0	-18.2	3.52 V	118	59.9	-4.1
6	19515.00	43.4 AV	54.0	-10.6	3.52 V	118	47.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.5 PK			1.07 H	240	94.3	7.2
2	*6665.00	90.3 AV			1.07 H	240	83.1	7.2
3	13330.00	51.2 PK	74.0	-22.8	3.83 H	331	37.4	13.8
4	13330.00	39.2 AV	54.0	-14.8	3.83 H	331	25.4	13.8
5	19995.00	56.1 PK	74.0	-17.9	4.00 H	223	59.7	-3.6
6	19995.00	44.7 AV	54.0	-9.3	4.00 H	223	48.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.9 PK			1.27 V	12	95.7	7.2
2	*6665.00	91.0 AV			1.27 V	12	83.8	7.2
3	13330.00	50.4 PK	74.0	-23.6	3.31 V	318	36.6	13.8
4	13330.00	38.0 AV	54.0	-16.0	3.31 V	318	24.2	13.8
5	19995.00	55.8 PK	74.0	-18.2	3.57 V	113	59.4	-3.6
6	19995.00	43.6 AV	54.0	-10.4	3.57 V	113	47.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.8 PK			1.00 H	246	94.0	7.8
2	*6985.00	90.9 AV			1.00 H	246	83.1	7.8
3	#7125.00	75.7 PK	88.2	-12.5	1.00 H	246	66.3	9.4
4	#7125.00	57.4 AV	68.2	-10.8	1.00 H	246	48.0	9.4
5	7250.00	62.4 PK	74.0	-11.6	1.00 H	246	53.7	8.7
6	7250.00	45.1 AV	54.0	-8.9	1.00 H	246	36.4	8.7
7	#13970.00	51.1 PK	88.2	-37.1	3.85 H	338	35.6	15.5
8	#13970.00	39.2 AV	68.2	-29.0	3.85 H	338	23.7	15.5
9	20955.00	56.1 PK	74.0	-17.9	4.00 H	234	58.8	-2.7
10	20955.00	44.5 AV	54.0	-9.5	4.00 H	234	47.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.1 PK			1.36 V	28	95.3	7.8
2	*6985.00	91.1 AV			1.36 V	28	83.3	7.8
3	#7125.00	74.9 PK	88.2	-13.3	1.36 V	28	65.5	9.4
4	#7125.00	56.7 AV	68.2	-11.5	1.36 V	28	47.3	9.4
5	7250.00	60.7 PK	74.0	-13.3	1.36 V	28	52.0	8.7
6	7250.00	44.8 AV	54.0	-9.2	1.36 V	28	36.1	8.7
7	#13970.00	50.3 PK	88.2	-37.9	3.35 V	319	34.8	15.5
8	#13970.00	38.0 AV	68.2	-30.2	3.35 V	319	22.5	15.5
9	20955.00	55.5 PK	74.0	-18.5	3.53 V	127	58.2	-2.7
10	20955.00	43.2 AV	54.0	-10.8	3.53 V	127	45.9	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode A

1Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

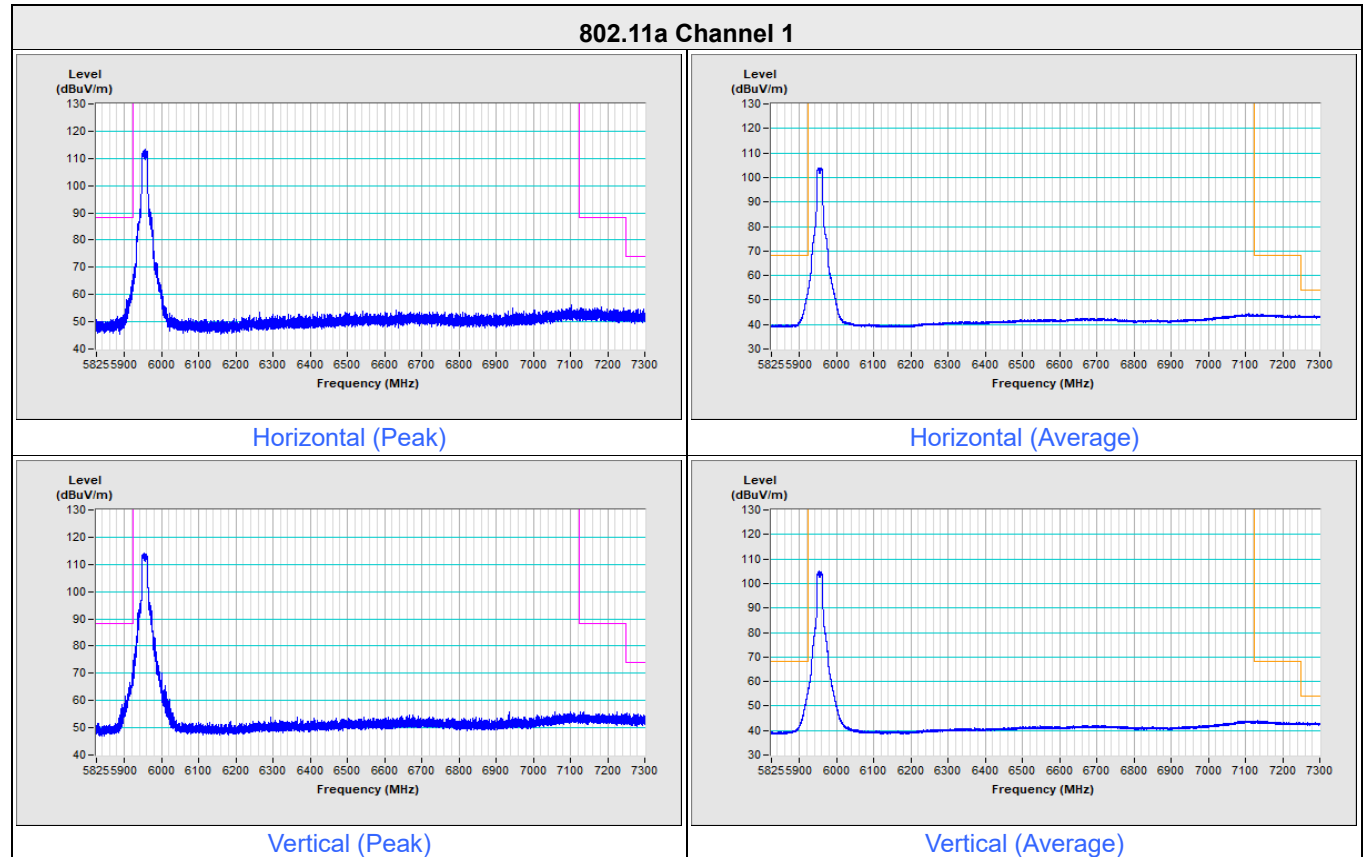


802.11a Channel 233

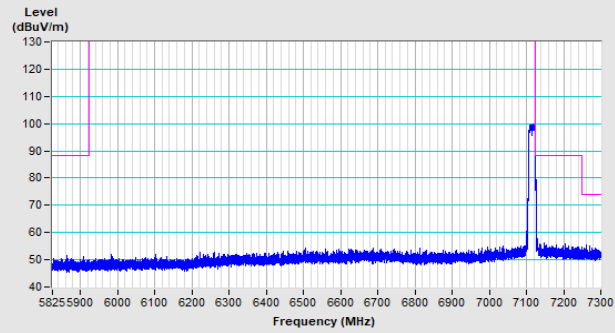


Horizontal (Peak)

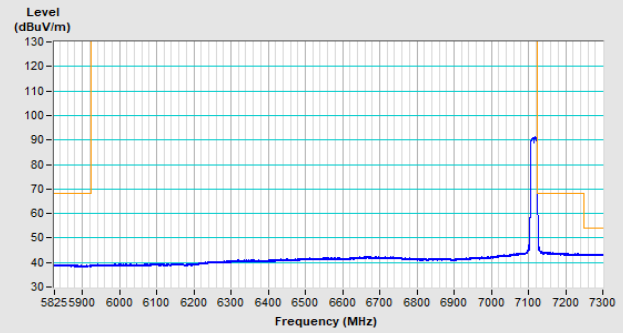

Horizontal (Average)

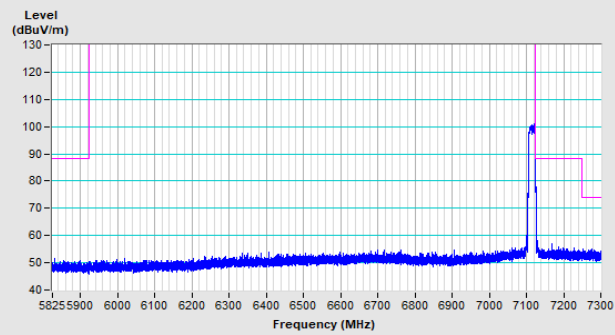


Vertical (Peak)

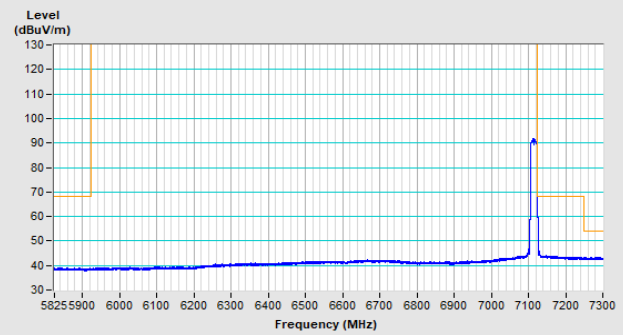


Vertical (Average)

1Tx NSS1


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

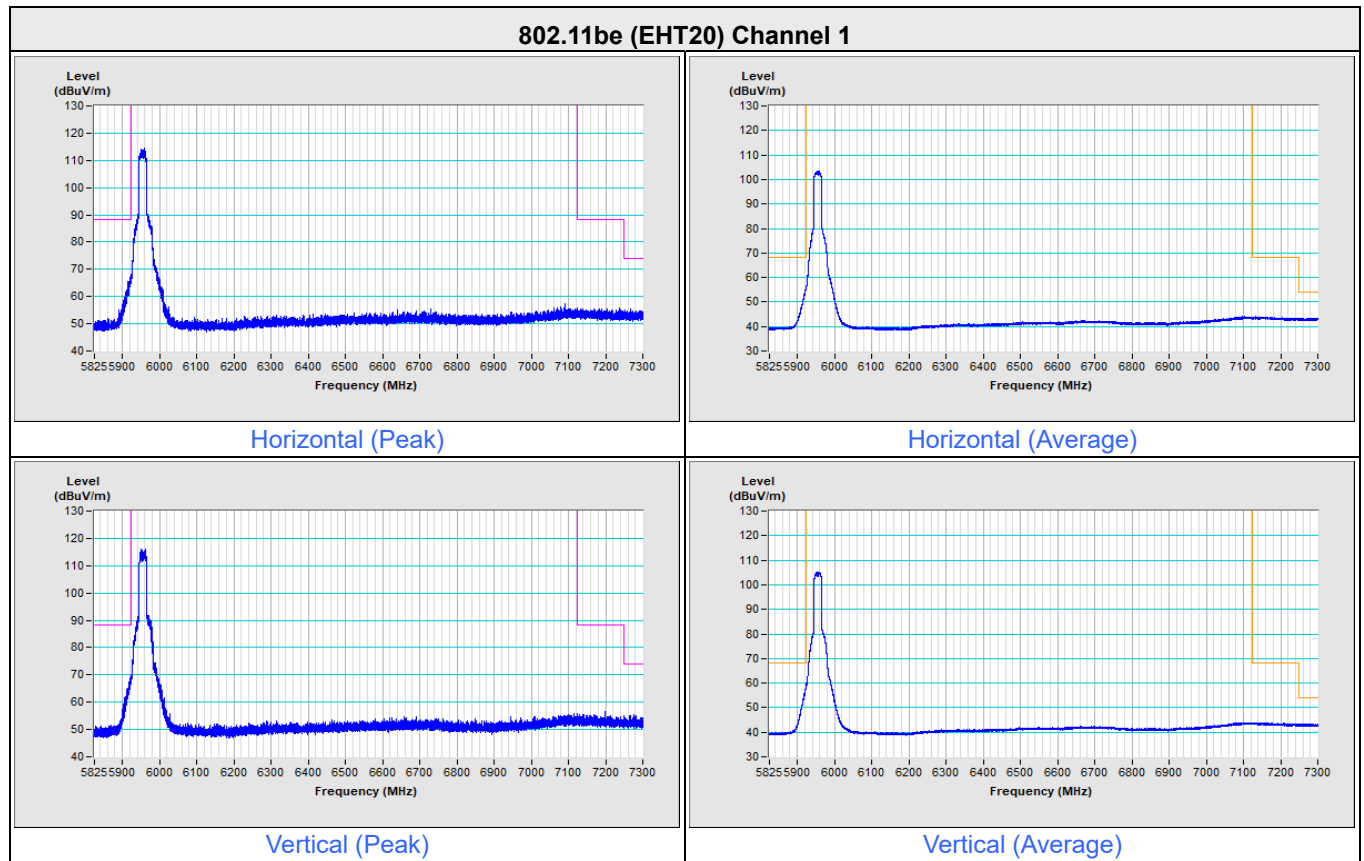

802.11be (EHT20) Channel 233

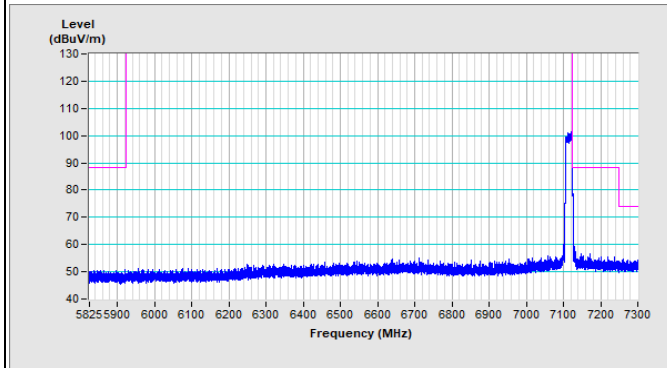

Horizontal (Peak)

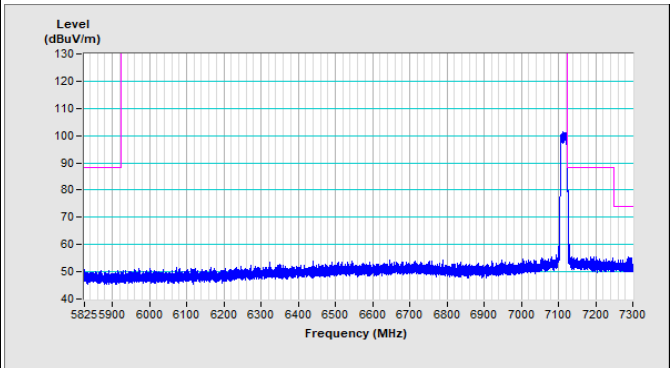

Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233




Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

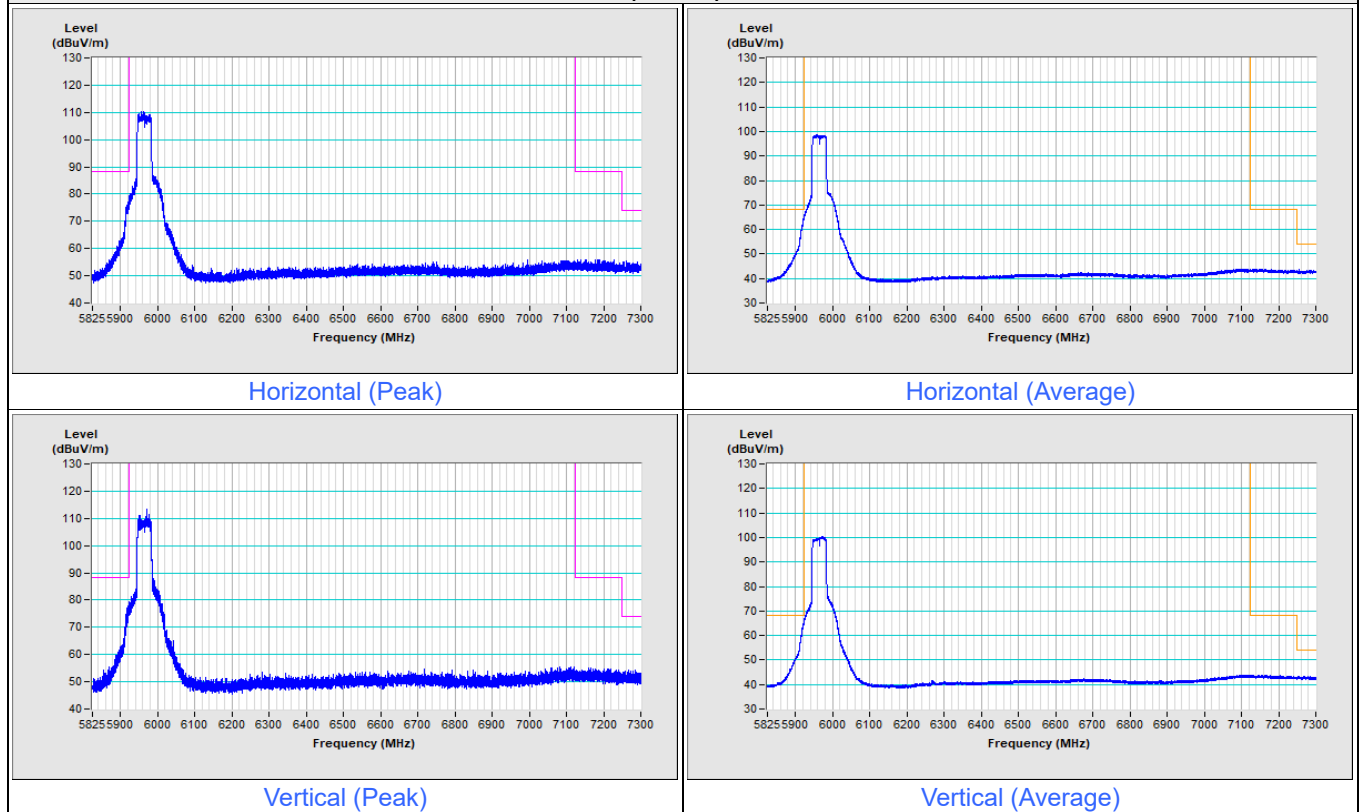


802.11be (EHT40) Channel 227

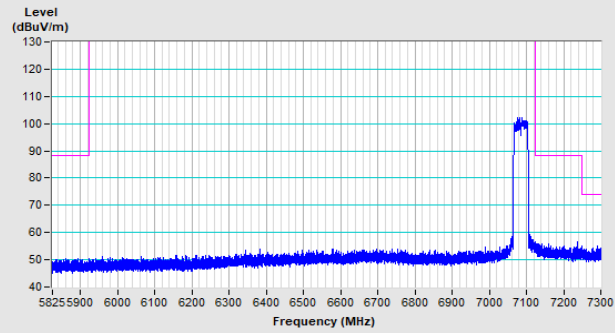


Horizontal (Peak)

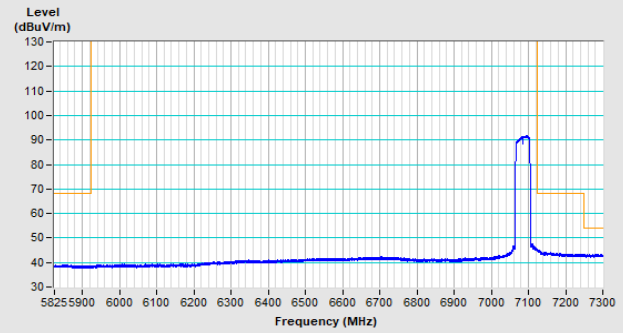

Horizontal (Average)

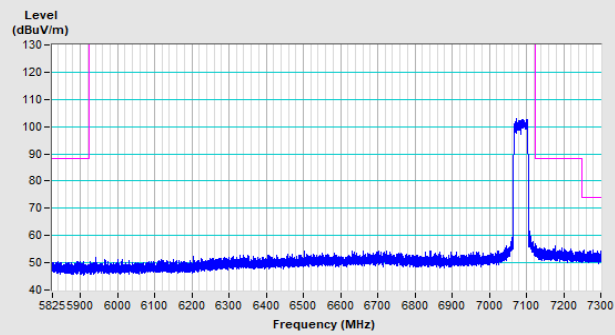


Vertical (Peak)

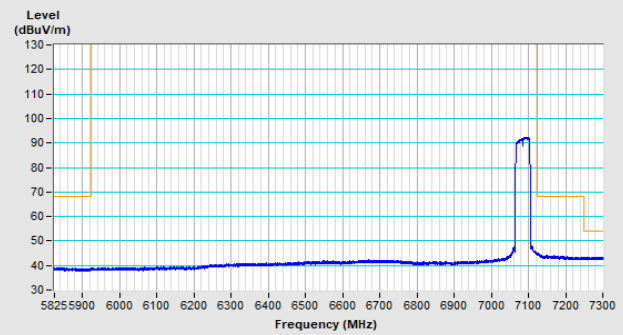


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

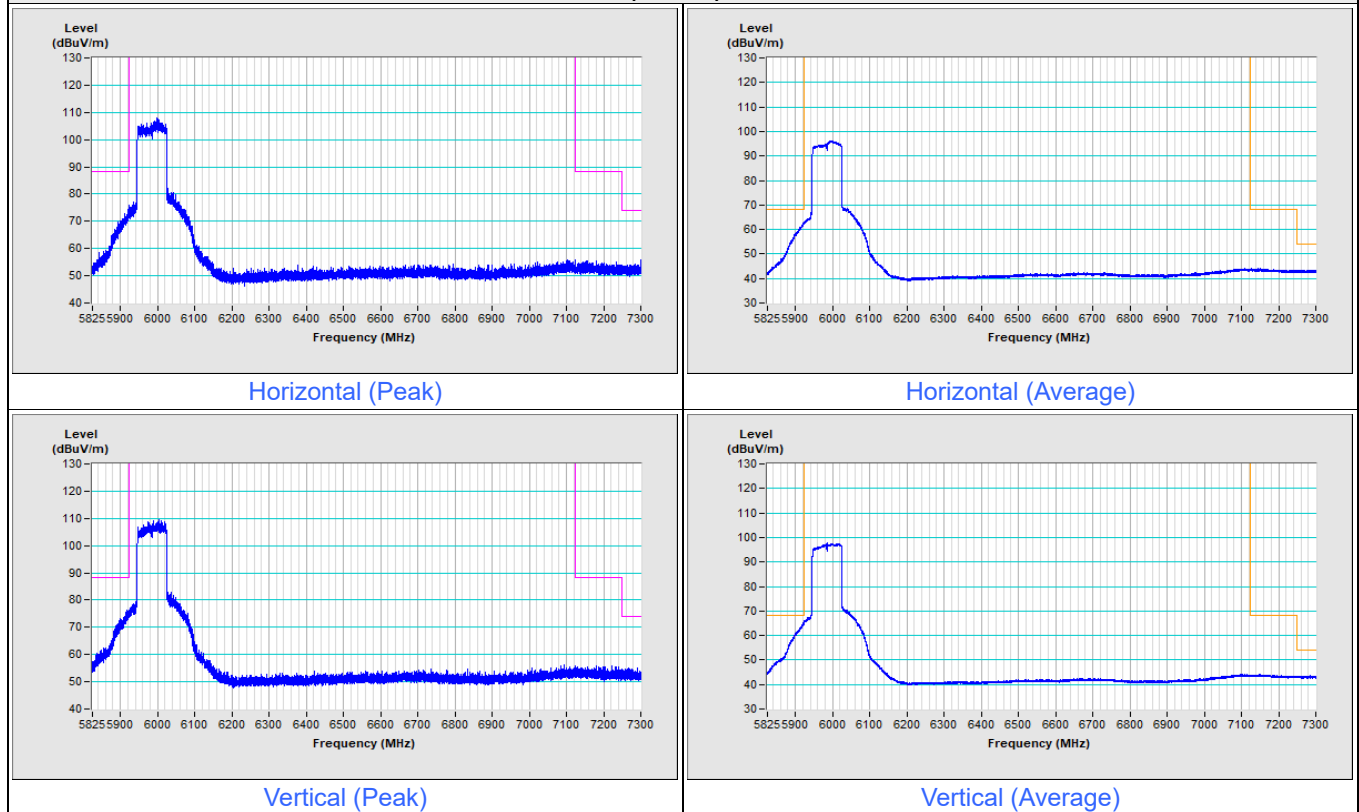


802.11be (EHT80) Channel 215

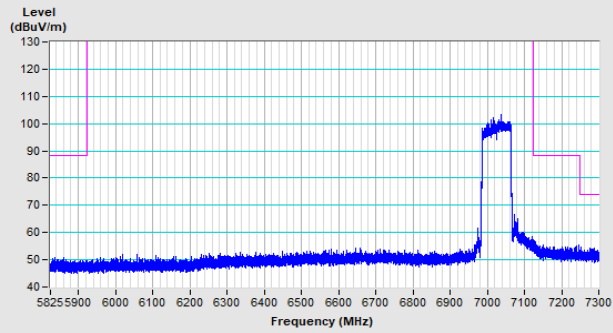


Horizontal (Peak)

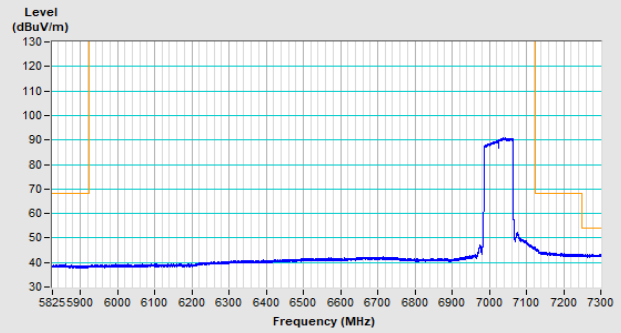

Horizontal (Average)

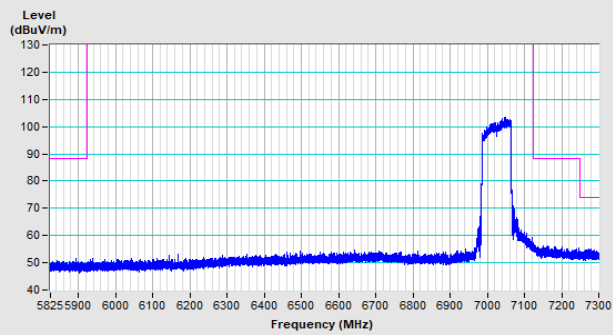


Vertical (Peak)

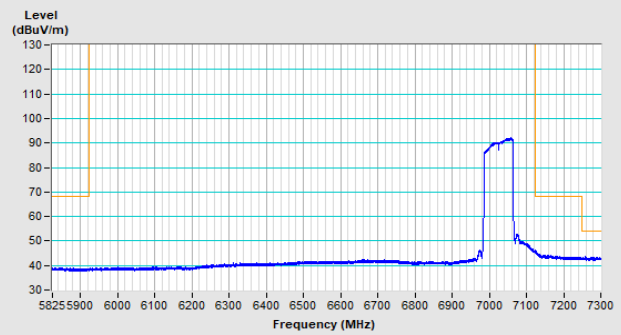


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

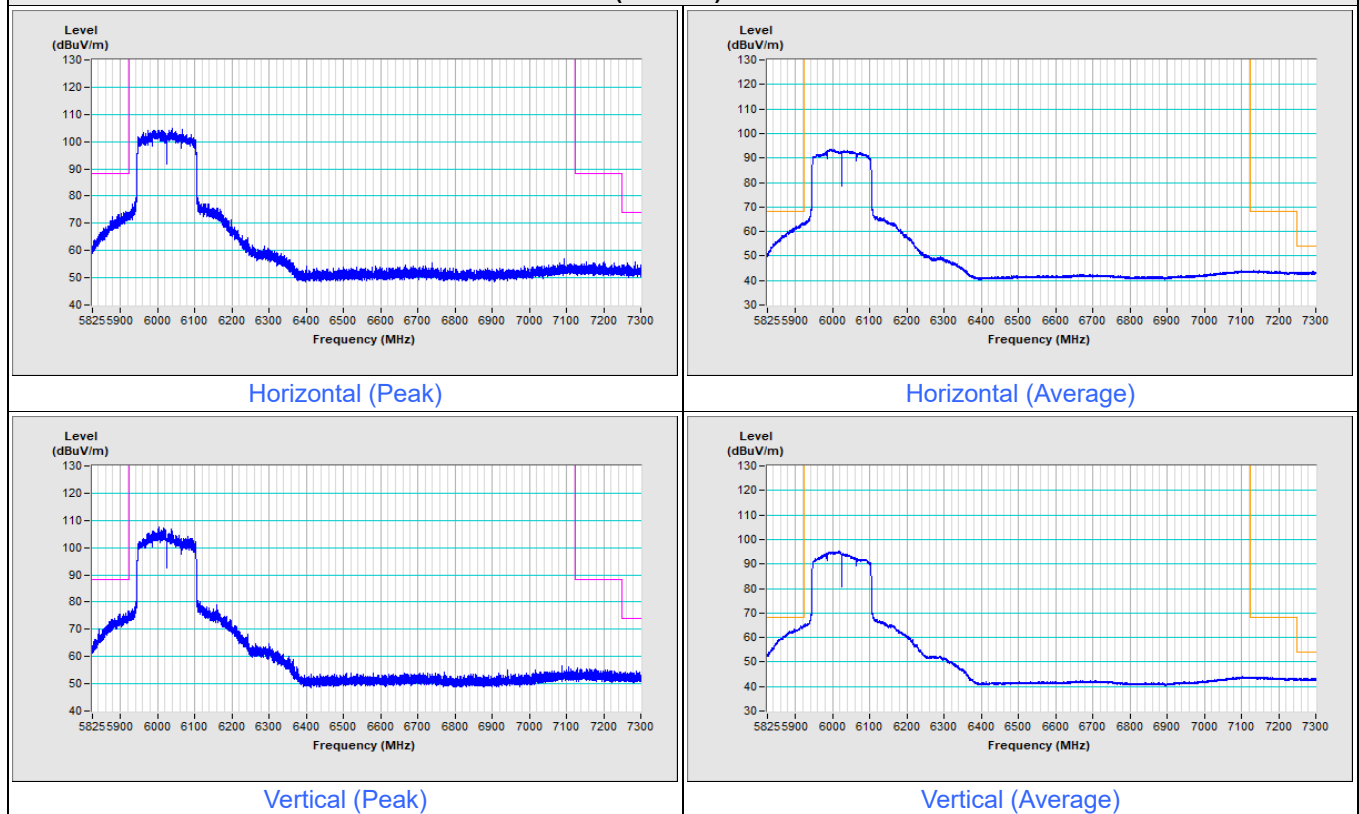


802.11be (EHT160) Channel 207

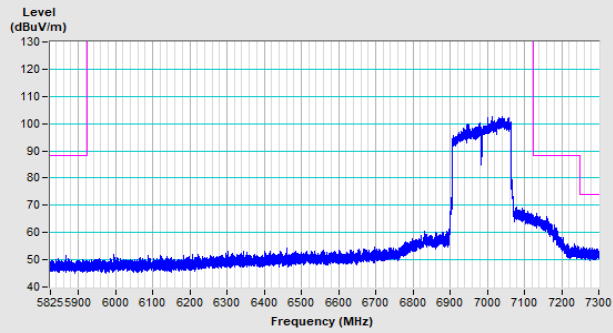


Horizontal (Peak)

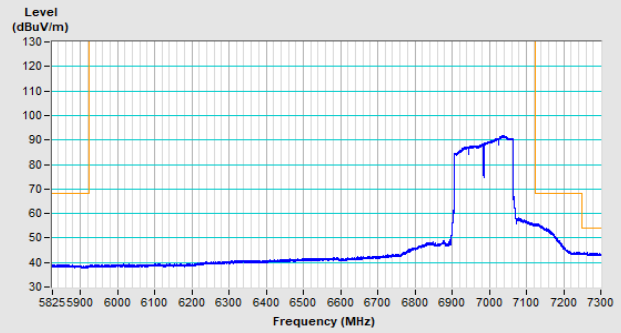

Horizontal (Average)

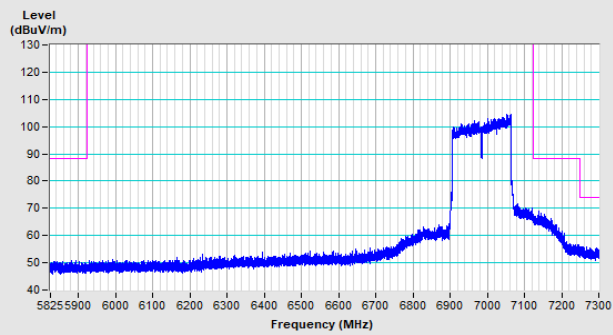


Vertical (Peak)

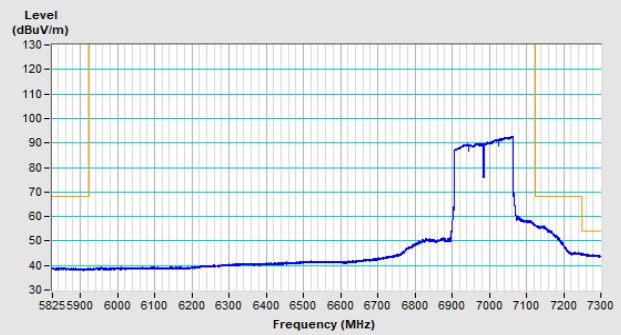


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

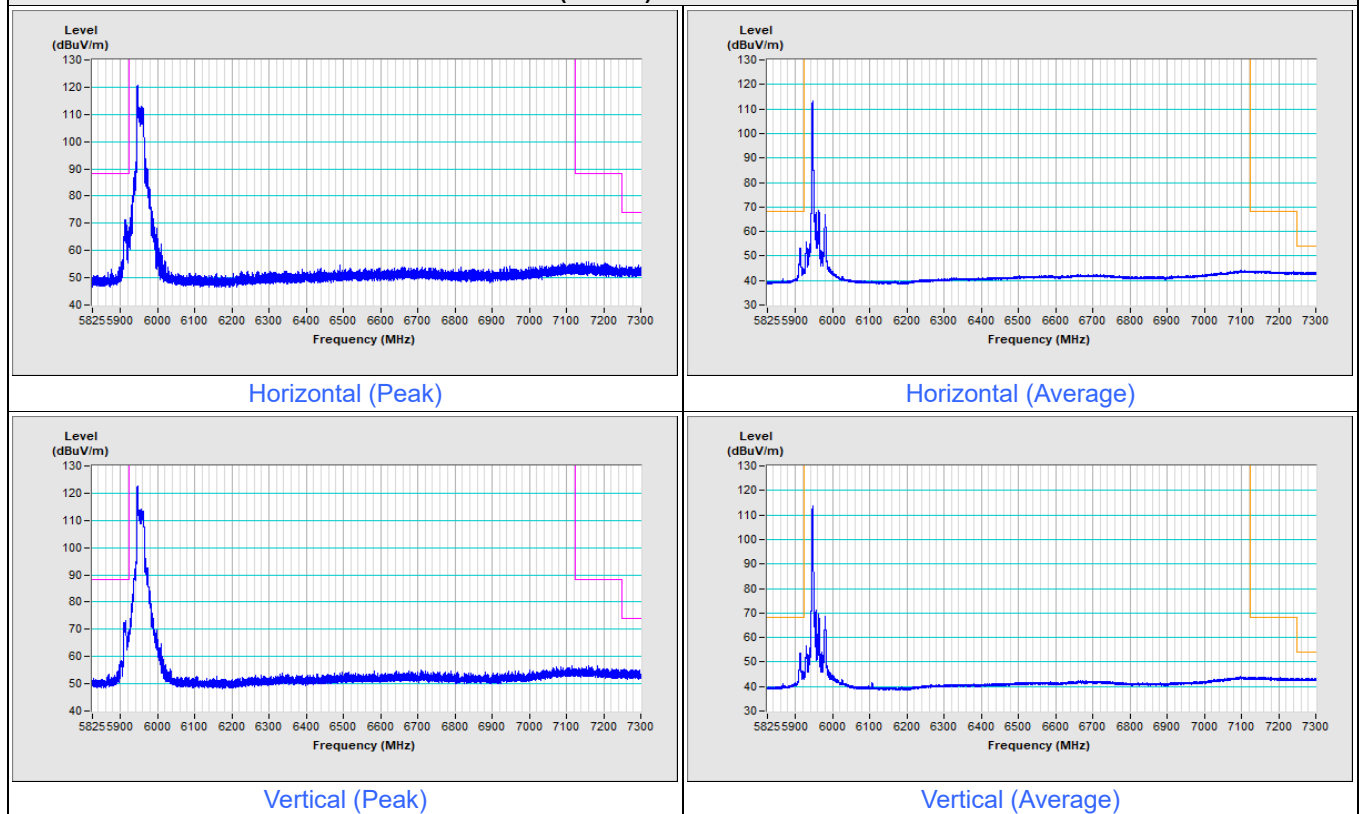

802.11be (EHT20) 26-tone RU Channel 233

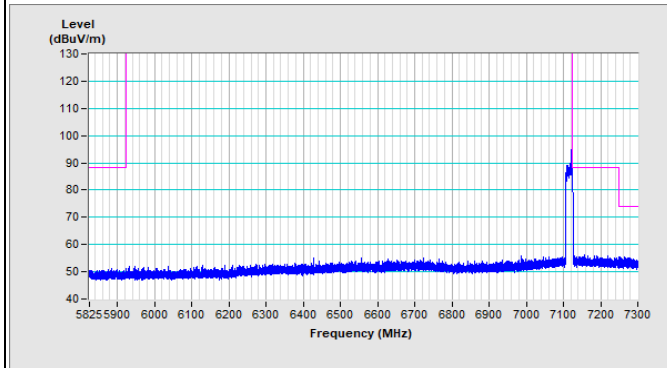


Horizontal (Peak)

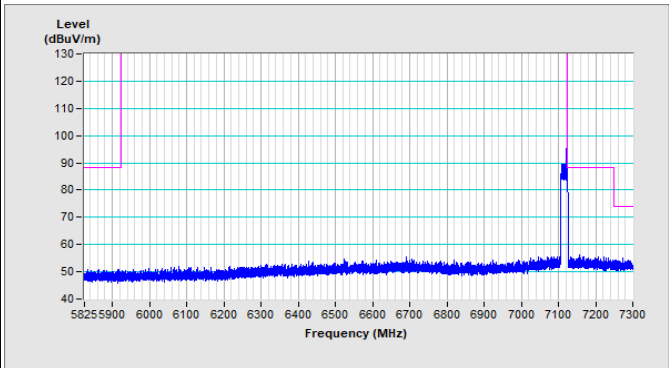


Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233

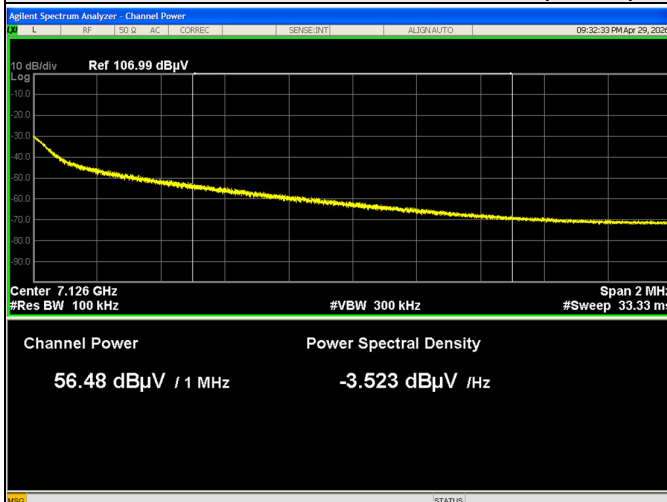


Horizontal (Average)

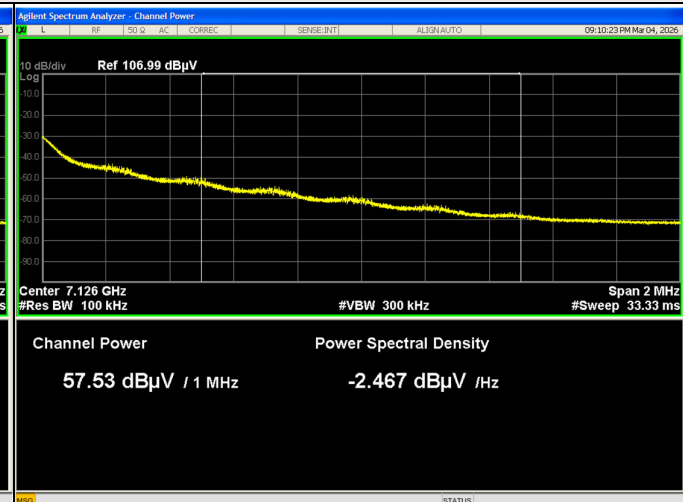


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

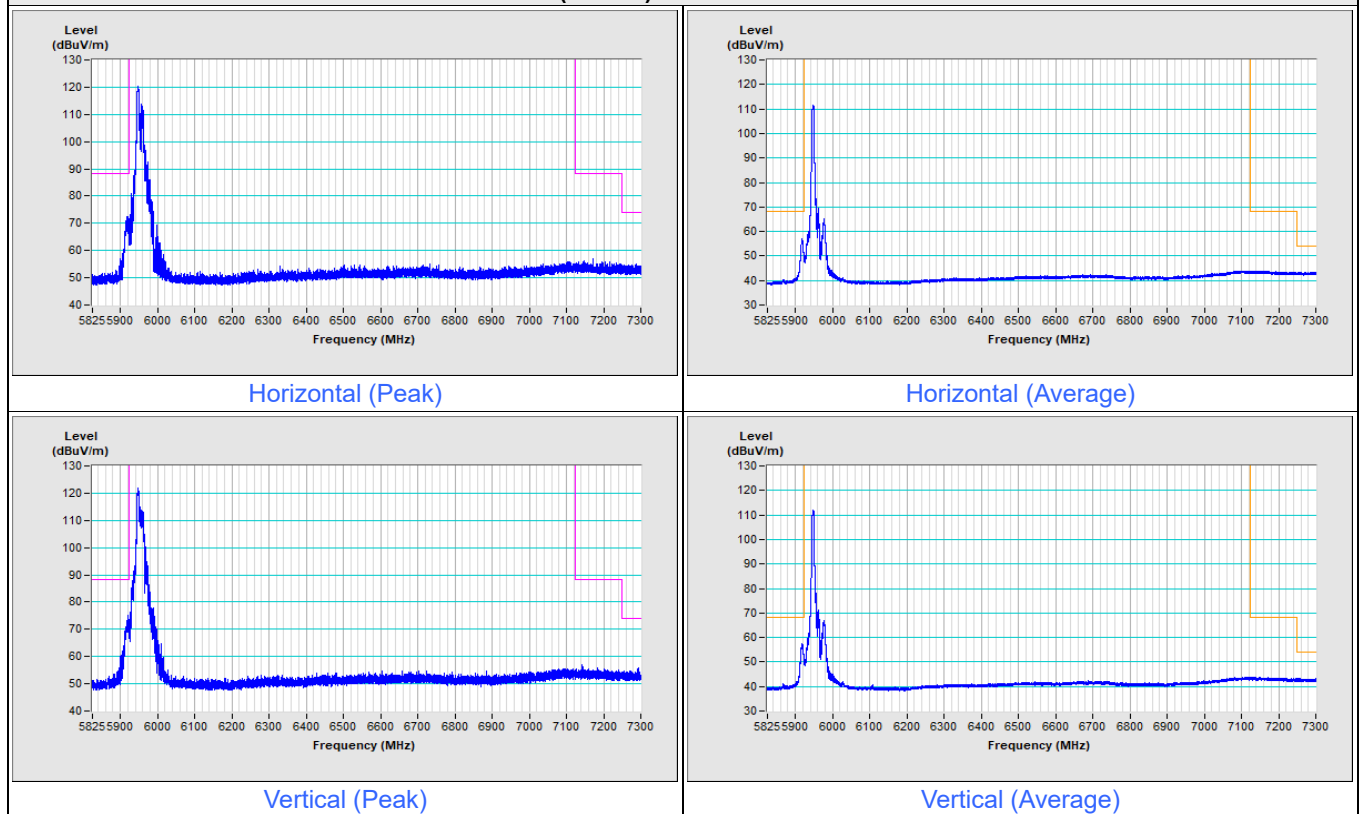

802.11be (EHT20) 52-tone RU Channel 233

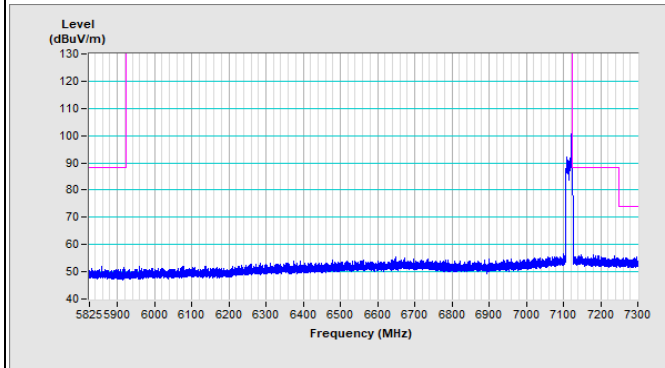


Horizontal (Peak)

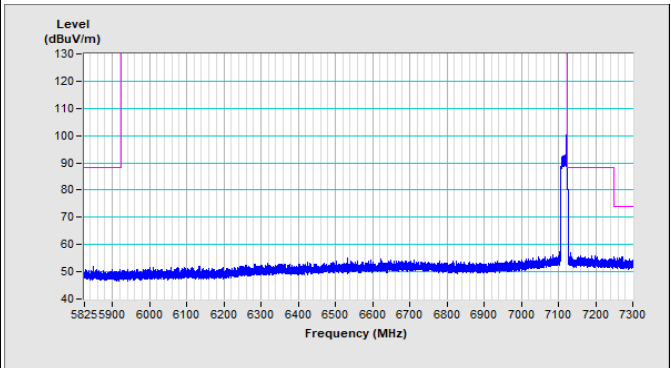

Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233

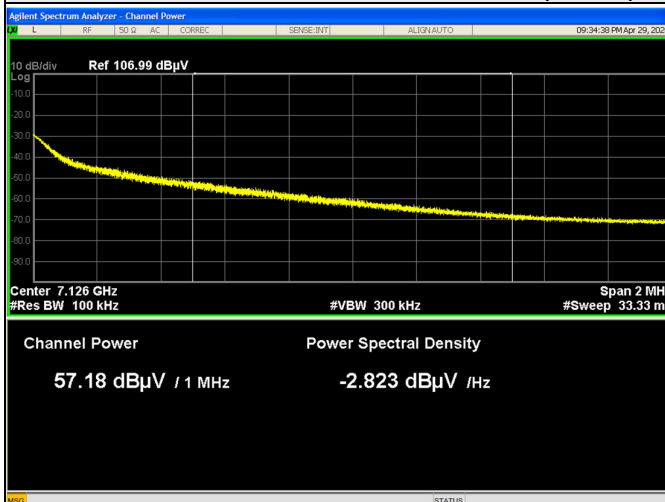


Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

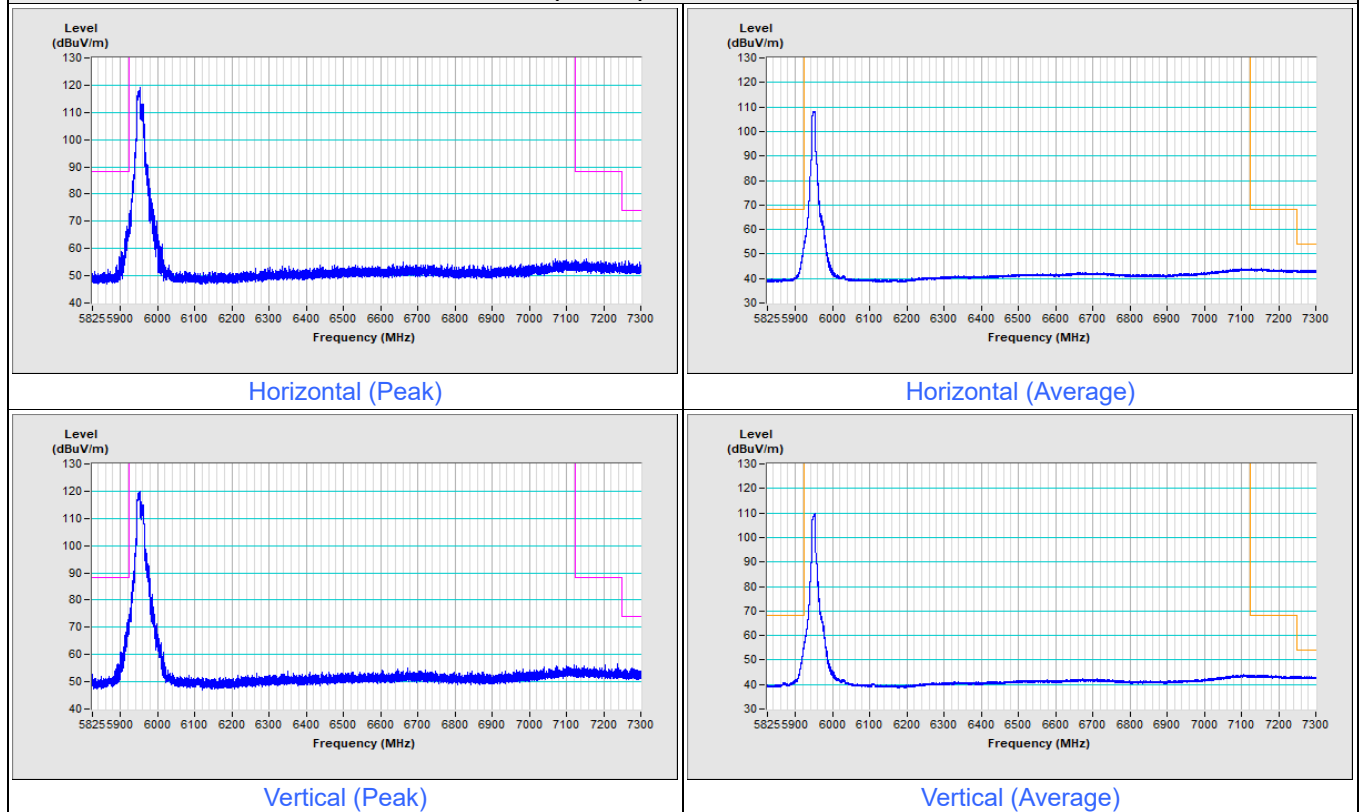

802.11be (EHT20) 106-tone RU Channel 233

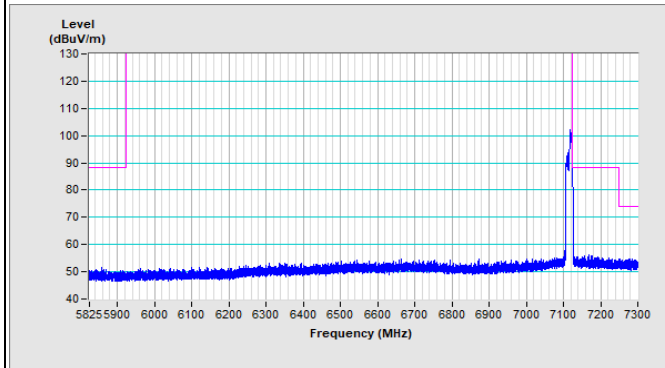


Horizontal (Peak)

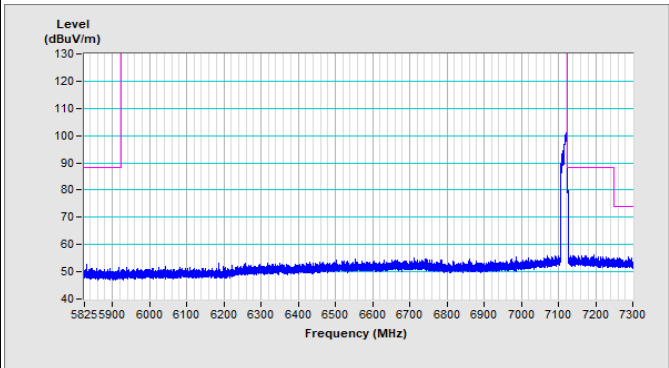


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

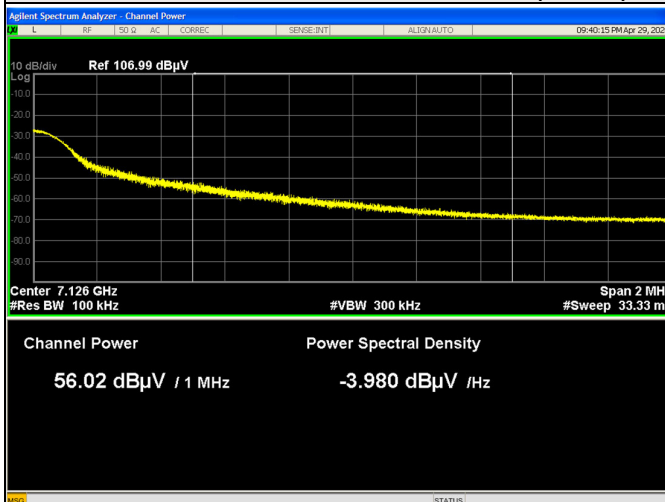


Horizontal (Average)

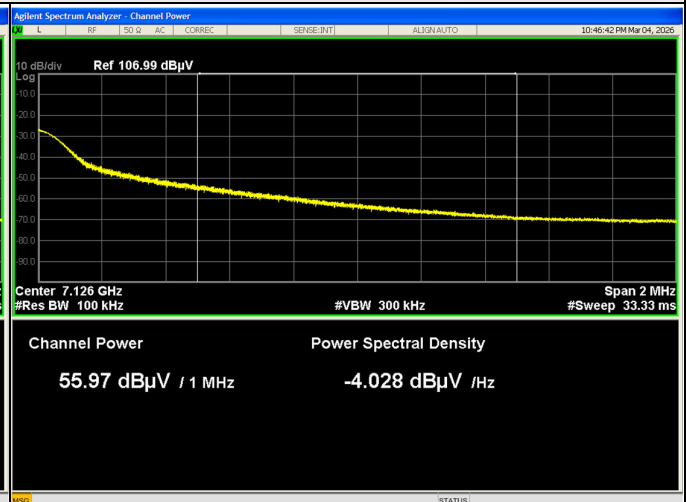


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

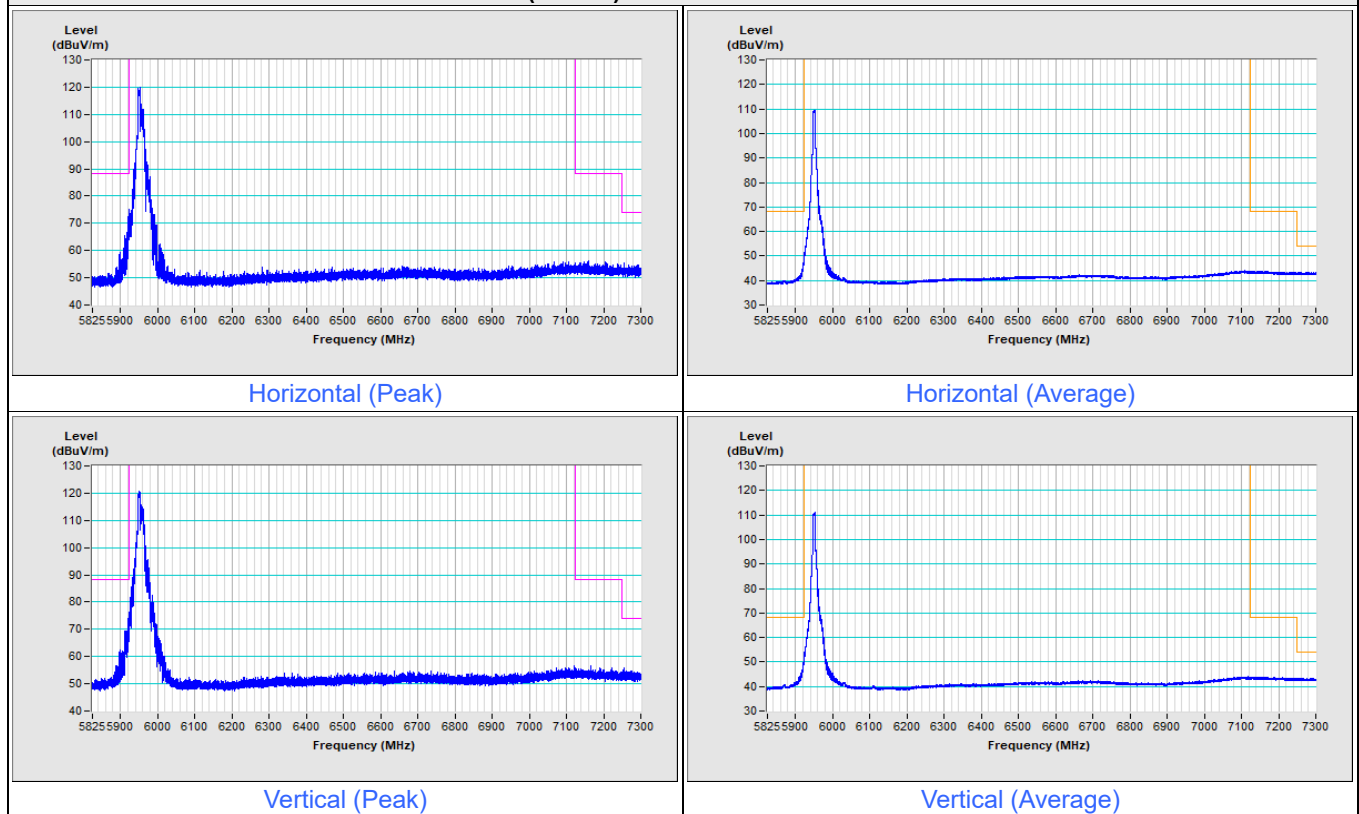


802.11be (EHT20) 52+26-tone MRU Channel 233

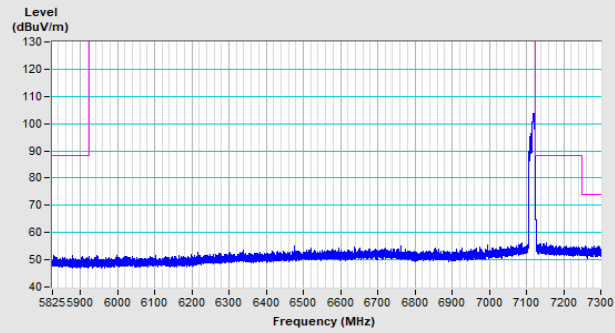


Horizontal (Peak)

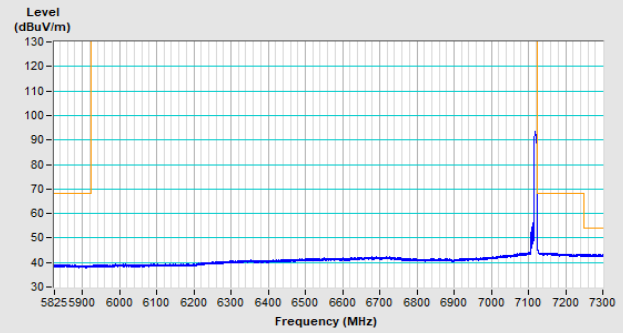

Horizontal (Average)

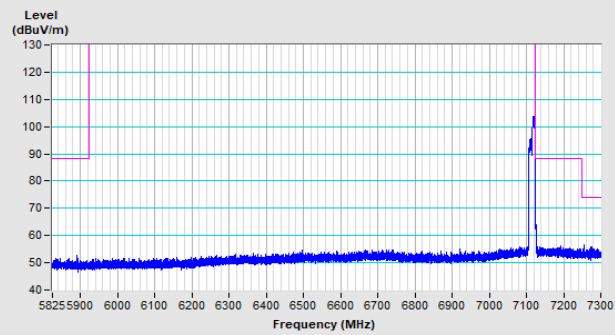


Vertical (Peak)

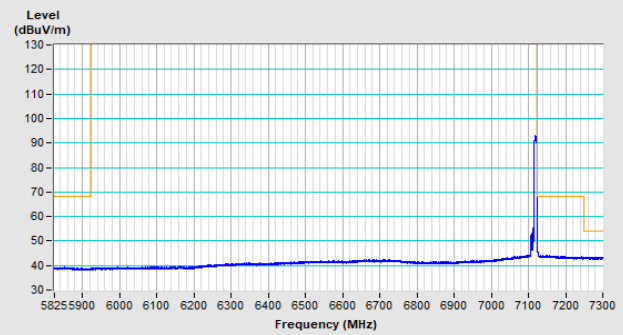


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

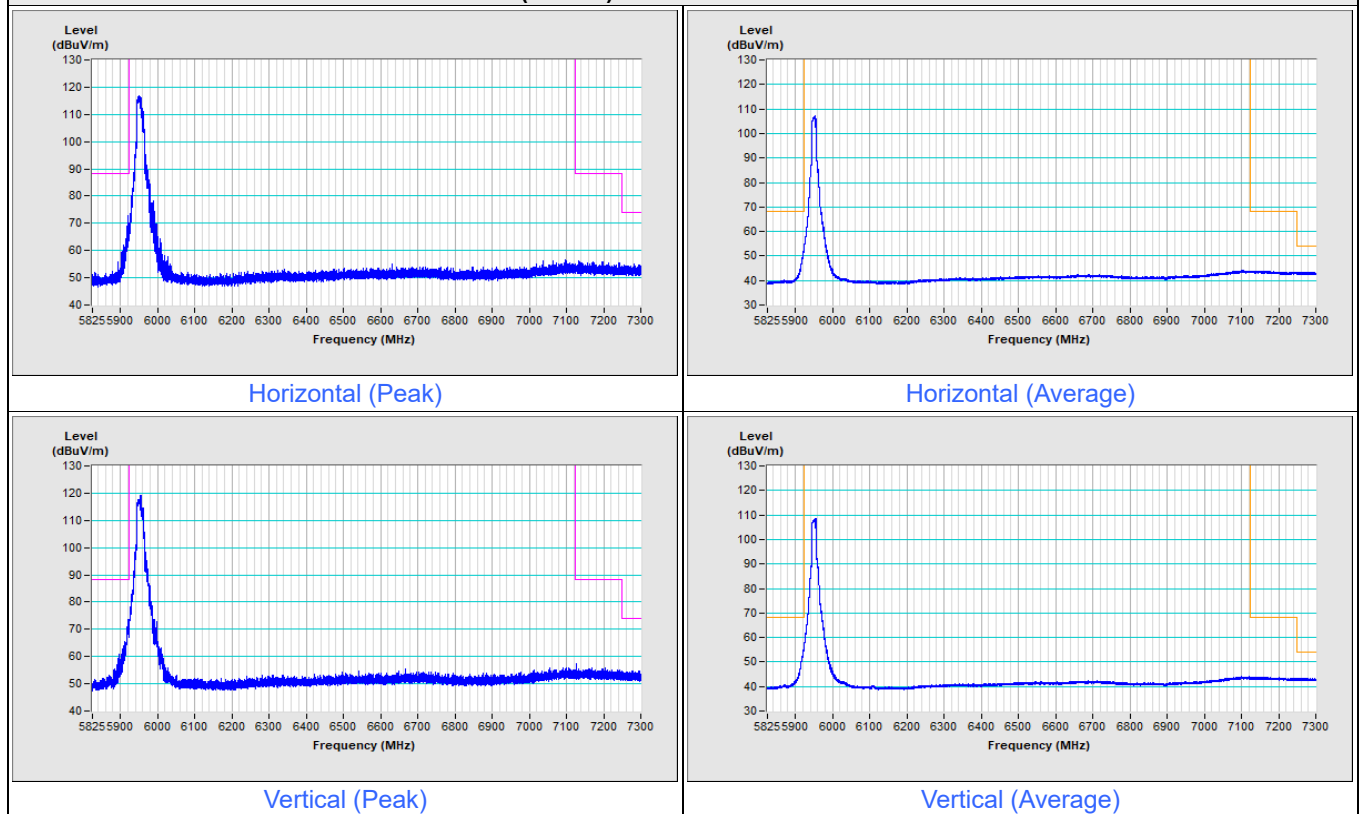

802.11be (EHT20) 106+26-tone MRU Channel 233

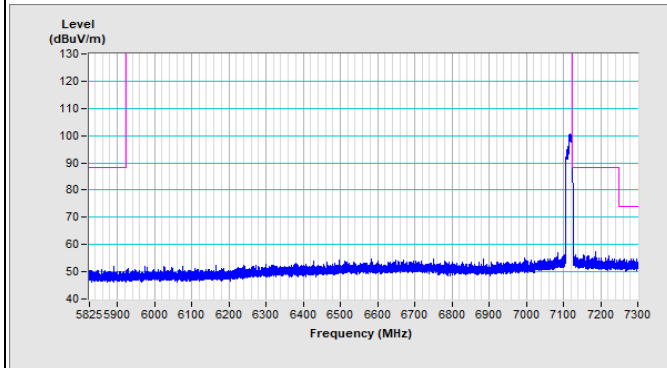

Horizontal (Peak)

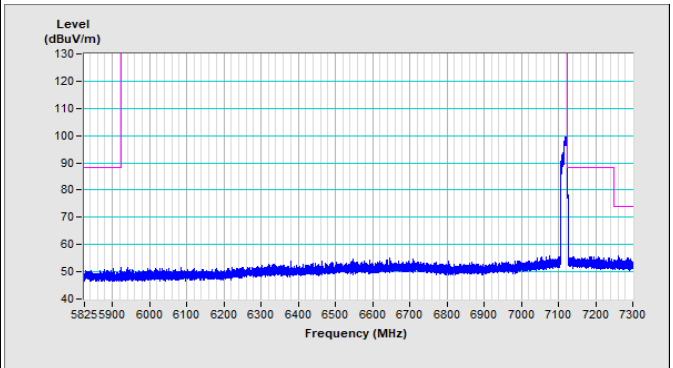


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233




Horizontal (Average)

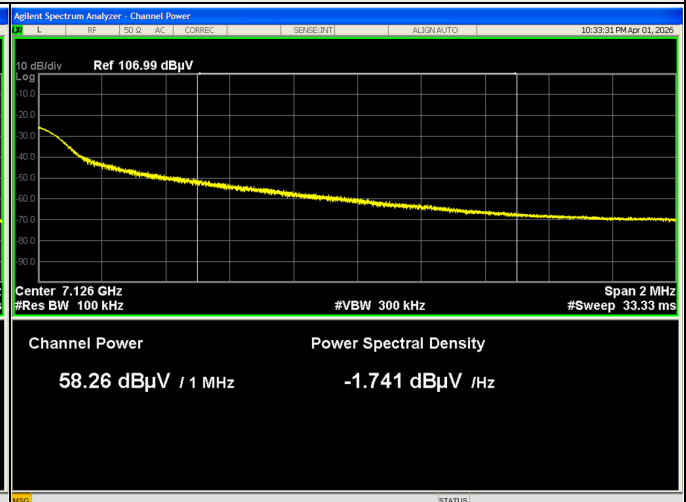


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

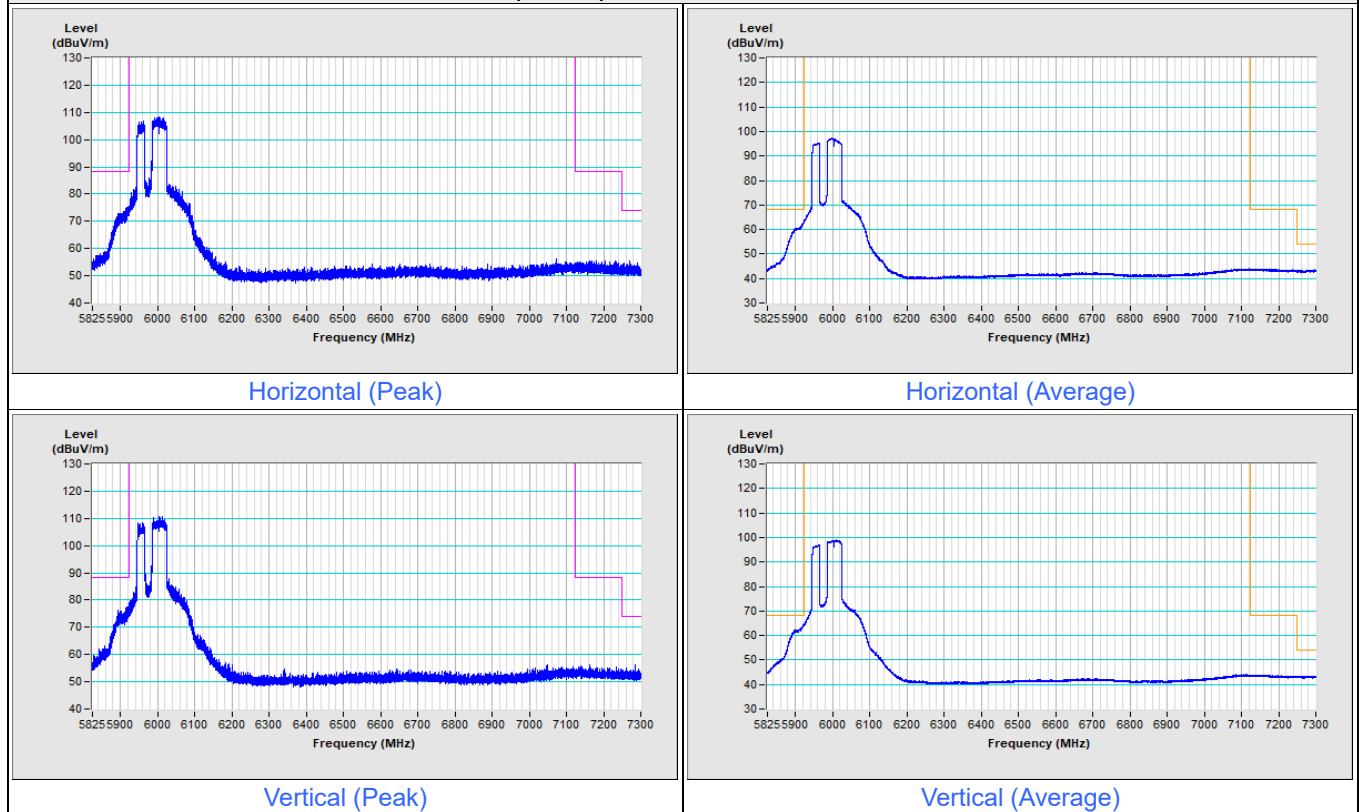


802.11be (EHT80) 484+242-tone MRU Channel 215

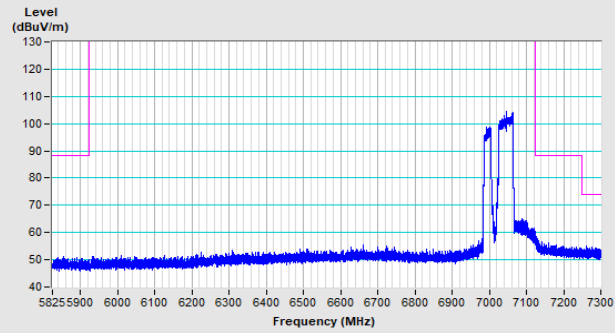


Horizontal (Peak)

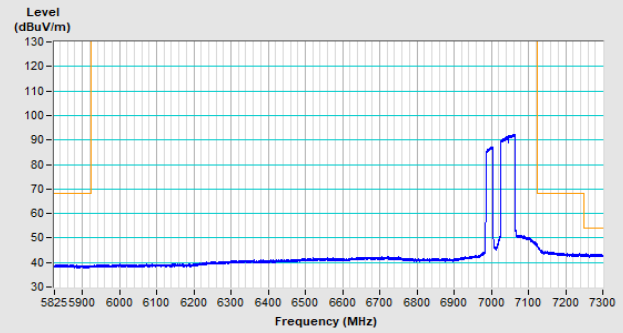

Horizontal (Average)

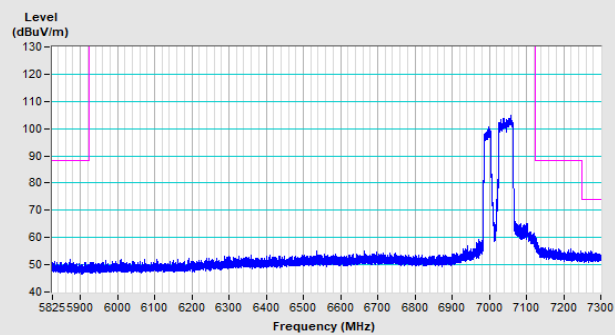


Vertical (Peak)

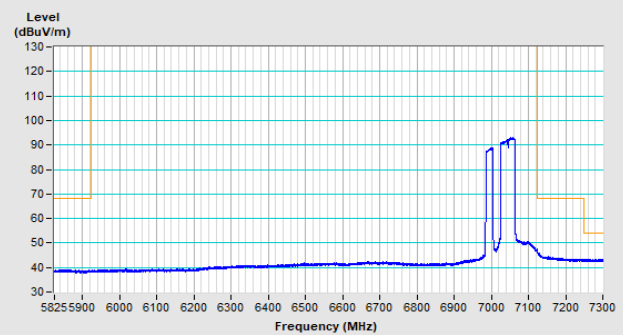


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

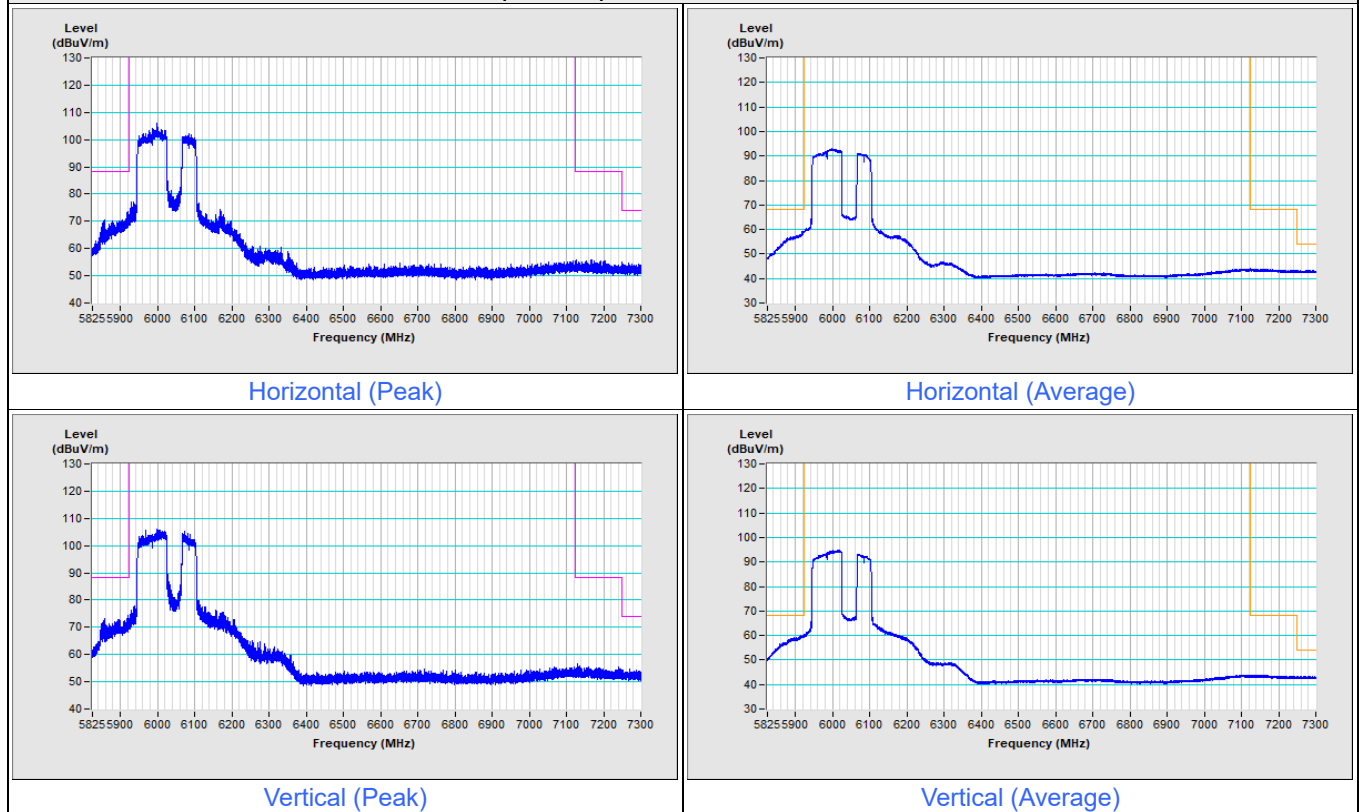


802.11be (EHT160) 996+484-tone MRU Channel 207

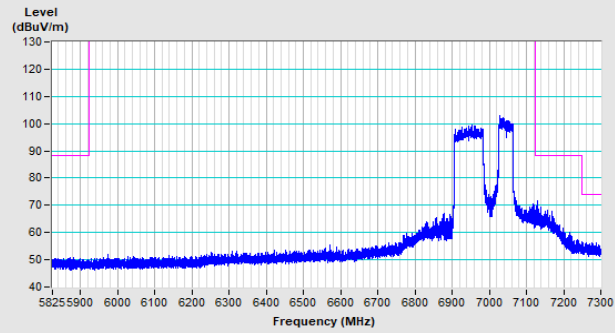


Horizontal (Peak)

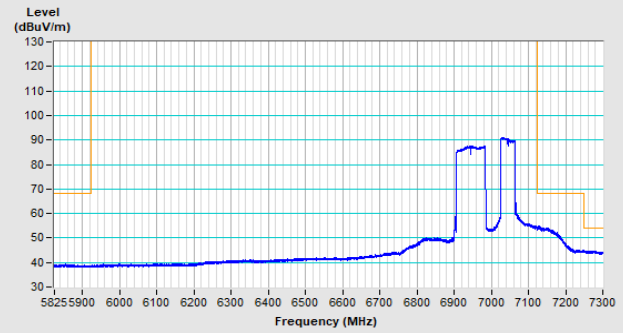

Horizontal (Average)

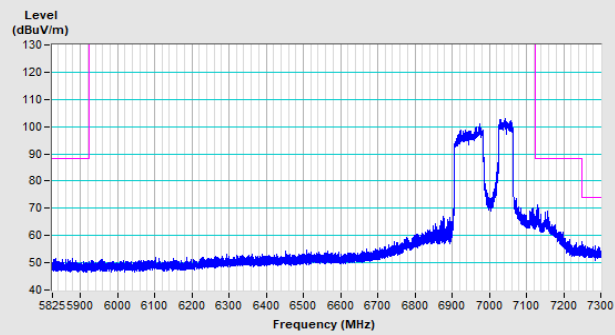


Vertical (Peak)

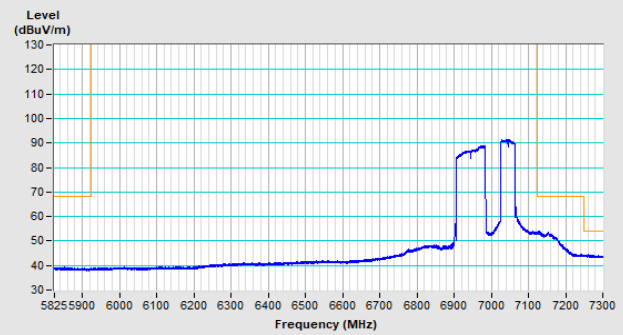


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

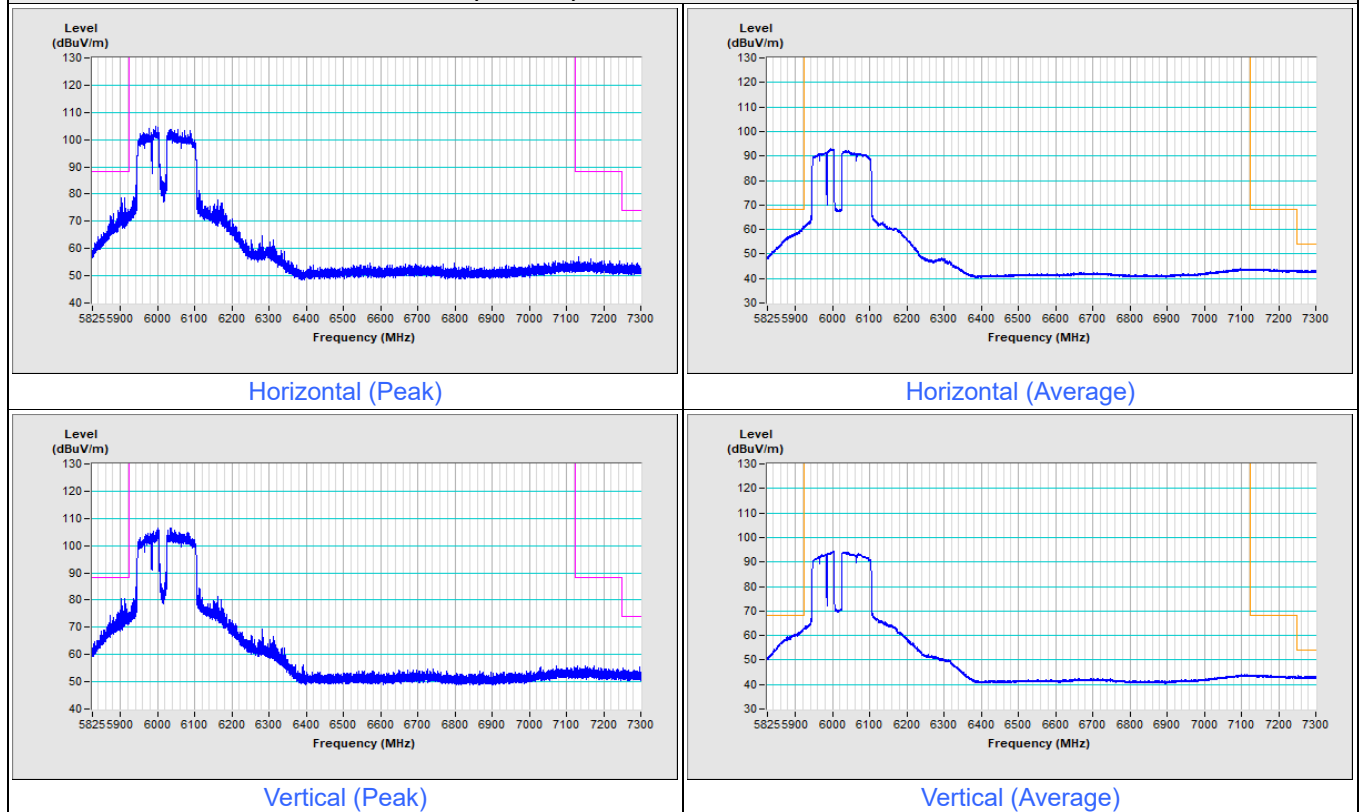


802.11be (EHT160) 996+484+242-tone MRU Channel 207

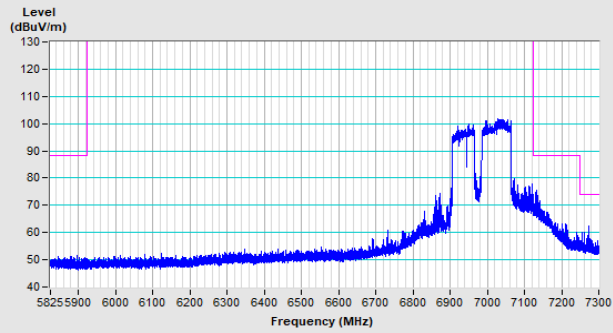


Horizontal (Peak)

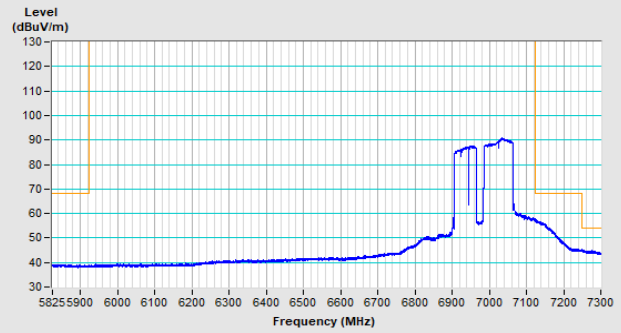

Horizontal (Average)

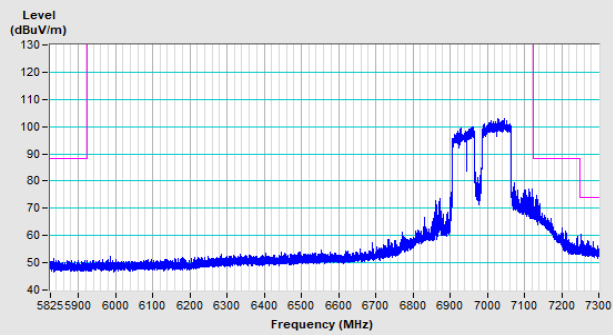

Vertical (Peak)

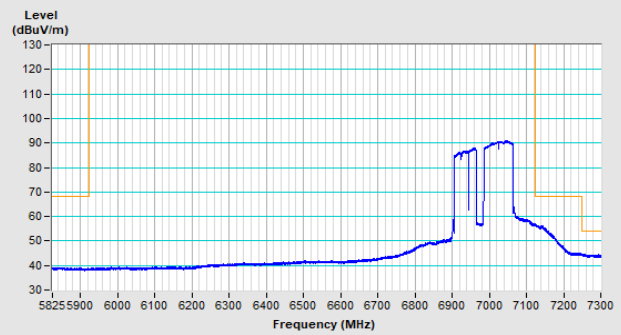

Vertical (Average)

Mode A
2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	2.24 H	128	58.9	4.3
2	#5925.00	48.3 AV	68.2	-19.9	2.24 H	128	44.0	4.3
3	*5955.00	115.5 PK			2.24 H	128	111.0	4.5
4	*5955.00	106.5 AV			2.24 H	128	102.0	4.5
5	11910.00	60.1 PK	74.0	-13.9	3.91 H	347	47.9	12.2
6	11910.00	50.6 AV	54.0	-3.4	3.91 H	347	38.4	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.68 H	56	35.3	21.9
8	17865.00	45.6 AV	54.0	-8.4	3.68 H	56	23.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	1.60 V	200	63.7	4.3
2	#5925.00	52.8 AV	68.2	-15.4	1.60 V	200	48.5	4.3
3	*5955.00	116.1 PK			1.60 V	200	111.6	4.5
4	*5955.00	107.1 AV			1.60 V	200	102.6	4.5
5	11910.00	59.7 PK	74.0	-14.3	2.47 V	54	47.5	12.2
6	11910.00	49.6 AV	54.0	-4.4	2.47 V	54	37.4	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.54 V	311	35.2	21.9
8	17865.00	45.3 AV	54.0	-8.7	1.54 V	311	23.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.3 PK			2.27 H	129	110.5	4.8
2	*6195.00	106.4 AV			2.27 H	129	101.6	4.8
3	12390.00	59.7 PK	74.0	-14.3	3.94 H	353	47.4	12.3
4	12390.00	50.5 AV	54.0	-3.5	3.94 H	353	38.2	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.63 H	67	62.4	-5.0
6	18585.00	46.0 AV	54.0	-8.0	3.63 H	67	51.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.0 PK			2.09 V	148	111.2	4.8
2	*6195.00	107.0 AV			2.09 V	148	102.2	4.8
3	12390.00	59.9 PK	74.0	-14.1	2.41 V	67	47.6	12.3
4	12390.00	49.9 AV	54.0	-4.1	2.41 V	67	37.6	12.3
5	18585.00	57.4 PK	74.0	-16.6	1.55 V	313	62.4	-5.0
6	18585.00	45.8 AV	54.0	-8.2	1.55 V	313	50.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.2 PK			2.28 H	112	108.8	6.4
2	*6415.00	106.1 AV			2.28 H	112	99.7	6.4
3	#12830.00	59.6 PK	88.2	-28.6	3.94 H	347	46.6	13.0
4	#12830.00	50.2 AV	68.2	-18.0	3.94 H	347	37.2	13.0
5	19245.00	56.8 PK	74.0	-17.2	3.66 H	70	60.6	-3.8
6	19245.00	45.4 AV	54.0	-8.6	3.66 H	70	49.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.1 PK			1.63 V	193	109.7	6.4
2	*6415.00	107.2 AV			1.63 V	193	100.8	6.4
3	#12830.00	59.6 PK	88.2	-28.6	2.41 V	50	46.6	13.0
4	#12830.00	49.5 AV	68.2	-18.7	2.41 V	50	36.5	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.54 V	300	61.1	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.54 V	300	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.8 PK			2.44 H	111	92.4	6.4
2	*6435.00	91.0 AV			2.44 H	111	84.6	6.4
3	#12870.00	59.5 PK	88.2	-28.7	3.93 H	347	46.5	13.0
4	#12870.00	50.1 AV	68.2	-18.1	3.93 H	347	37.1	13.0
5	19305.00	57.2 PK	74.0	-16.8	3.65 H	54	60.9	-3.7
6	19305.00	46.0 AV	54.0	-8.0	3.65 H	54	49.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.8 PK			1.87 V	185	93.4	6.4
2	*6435.00	91.3 AV			1.87 V	185	84.9	6.4
3	#12870.00	59.4 PK	88.2	-28.8	2.46 V	75	46.4	13.0
4	#12870.00	49.4 AV	68.2	-18.8	2.46 V	75	36.4	13.0
5	19305.00	57.8 PK	74.0	-16.2	1.55 V	326	61.5	-3.7
6	19305.00	45.9 AV	54.0	-8.1	1.55 V	326	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.9 PK			2.27 H	119	108.3	6.6
2	*6475.00	106.2 AV			2.27 H	119	99.6	6.6
3	#12950.00	59.6 PK	88.2	-28.6	3.85 H	351	46.5	13.1
4	#12950.00	50.3 AV	68.2	-17.9	3.85 H	351	37.2	13.1
5	19425.00	57.4 PK	74.0	-16.6	3.63 H	49	61.2	-3.8
6	19425.00	45.6 AV	54.0	-8.4	3.63 H	49	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.2 PK			1.61 V	205	109.6	6.6
2	*6475.00	107.3 AV			1.61 V	205	100.7	6.6
3	#12950.00	59.5 PK	88.2	-28.7	2.53 V	55	46.4	13.1
4	#12950.00	49.4 AV	68.2	-18.8	2.53 V	55	36.3	13.1
5	19425.00	57.1 PK	74.0	-16.9	1.58 V	314	60.9	-3.8
6	19425.00	45.4 AV	54.0	-8.6	1.58 V	314	49.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.4 PK			2.50 H	128	92.5	6.9
2	*6515.00	91.6 AV			2.50 H	128	84.7	6.9
3	#13030.00	59.3 PK	88.2	-28.9	3.99 H	347	46.1	13.2
4	#13030.00	50.1 AV	68.2	-18.1	3.99 H	347	36.9	13.2
5	19545.00	57.8 PK	74.0	-16.2	3.70 H	47	61.9	-4.1
6	19545.00	46.3 AV	54.0	-7.7	3.70 H	47	50.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.0 PK			1.99 V	181	93.1	6.9
2	*6515.00	91.8 AV			1.99 V	181	84.9	6.9
3	#13030.00	59.7 PK	88.2	-28.5	2.43 V	62	46.5	13.2
4	#13030.00	49.4 AV	68.2	-18.8	2.43 V	62	36.2	13.2
5	19545.00	57.2 PK	74.0	-16.8	1.59 V	329	61.3	-4.1
6	19545.00	45.5 AV	54.0	-8.5	1.59 V	329	49.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.6 PK			2.19 H	133	108.7	6.9
2	*6535.00	106.5 AV			2.19 H	133	99.6	6.9
3	#13070.00	60.3 PK	88.2	-27.9	3.86 H	360	47.1	13.2
4	#13070.00	50.9 AV	68.2	-17.3	3.86 H	360	37.7	13.2
5	19605.00	56.9 PK	74.0	-17.1	3.70 H	68	60.9	-4.0
6	19605.00	45.5 AV	54.0	-8.5	3.70 H	68	49.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.5 PK			1.59 V	204	109.6	6.9
2	*6535.00	107.2 AV			1.59 V	204	100.3	6.9
3	#13070.00	59.6 PK	88.2	-28.6	2.44 V	67	46.4	13.2
4	#13070.00	49.2 AV	68.2	-19.0	2.44 V	67	36.0	13.2
5	19605.00	57.3 PK	74.0	-16.7	1.55 V	302	61.3	-4.0
6	19605.00	45.4 AV	54.0	-8.6	1.55 V	302	49.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.2 PK			2.25 H	113	108.0	7.2
2	*6695.00	106.4 AV			2.25 H	113	99.2	7.2
3	13390.00	59.9 PK	74.0	-14.1	3.97 H	346	45.9	14.0
4	13390.00	50.3 AV	54.0	-3.7	3.97 H	346	36.3	14.0
5	20085.00	57.1 PK	74.0	-16.9	3.64 H	45	60.6	-3.5
6	20085.00	45.6 AV	54.0	-8.4	3.64 H	45	49.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.8 PK			1.62 V	191	109.6	7.2
2	*6695.00	107.6 AV			1.62 V	191	100.4	7.2
3	13390.00	59.9 PK	74.0	-14.1	2.52 V	59	45.9	14.0
4	13390.00	49.6 AV	54.0	-4.4	2.52 V	59	35.6	14.0
5	20085.00	57.4 PK	74.0	-16.6	1.55 V	311	60.9	-3.5
6	20085.00	45.5 AV	54.0	-8.5	1.55 V	311	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.8 PK			2.28 H	124	108.6	7.2
2	*6855.00	106.6 AV			2.28 H	124	99.4	7.2
3	#13710.00	60.2 PK	88.2	-28.0	3.96 H	354	45.0	15.2
4	#13710.00	50.7 AV	68.2	-17.5	3.96 H	354	35.5	15.2
5	20565.00	57.0 PK	74.0	-17.0	3.66 H	50	60.3	-3.3
6	20565.00	45.5 AV	54.0	-8.5	3.66 H	50	48.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.9 PK			1.57 V	212	108.7	7.2
2	*6855.00	106.9 AV			1.57 V	212	99.7	7.2
3	#13710.00	60.3 PK	88.2	-27.9	2.41 V	58	45.1	15.2
4	#13710.00	49.9 AV	68.2	-18.3	2.41 V	58	34.7	15.2
5	20565.00	57.3 PK	74.0	-16.7	1.54 V	301	60.6	-3.3
6	20565.00	45.7 AV	54.0	-8.3	1.54 V	301	49.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.0 PK			2.45 H	141	91.8	7.2
2	*6875.00	91.2 AV			2.45 H	141	84.0	7.2
3	#13750.00	59.9 PK	88.2	-28.3	3.96 H	358	44.8	15.1
4	#13750.00	50.4 AV	68.2	-17.8	3.96 H	358	35.3	15.1
5	20625.00	56.6 PK	74.0	-17.4	3.62 H	68	59.9	-3.3
6	20625.00	45.6 AV	54.0	-8.4	3.62 H	68	48.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.6 PK			2.01 V	174	92.4	7.2
2	*6875.00	91.4 AV			2.01 V	174	84.2	7.2
3	#13750.00	59.0 PK	88.2	-29.2	2.52 V	85	43.9	15.1
4	#13750.00	49.2 AV	68.2	-19.0	2.52 V	85	34.1	15.1
5	20625.00	57.4 PK	74.0	-16.6	1.50 V	312	60.7	-3.3
6	20625.00	45.6 AV	54.0	-8.4	1.50 V	312	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.4 PK			2.46 H	121	91.4	8.0
2	*6995.00	91.4 AV			2.46 H	121	83.4	8.0
3	#13990.00	59.2 PK	88.2	-29.0	3.98 H	356	43.6	15.6
4	#13990.00	49.7 AV	68.2	-18.5	3.98 H	356	34.1	15.6
5	20985.00	57.1 PK	74.0	-16.9	3.66 H	63	59.9	-2.8
6	20985.00	46.1 AV	54.0	-7.9	3.66 H	63	48.9	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.4 PK			1.35 V	190	91.4	8.0
2	*6995.00	91.2 AV			1.35 V	190	83.2	8.0
3	#13990.00	59.3 PK	88.2	-28.9	2.49 V	75	43.7	15.6
4	#13990.00	49.1 AV	68.2	-19.1	2.49 V	75	33.5	15.6
5	20985.00	57.8 PK	74.0	-16.2	1.50 V	331	60.6	-2.8
6	20985.00	46.0 AV	54.0	-8.0	1.50 V	331	48.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.5 PK			2.49 H	125	90.0	9.5
2	*7115.00	91.5 AV			2.49 H	125	82.0	9.5
3	#7125.00	65.6 PK	88.2	-22.6	2.49 H	125	56.2	9.4
4	#7125.00	46.7 AV	68.2	-21.5	2.49 H	125	37.3	9.4
5	7250.00	54.5 PK	74.0	-19.5	2.49 H	125	45.8	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.49 H	125	34.6	8.7
7	#14230.00	59.4 PK	88.2	-28.8	3.97 H	340	44.1	15.3
8	#14230.00	50.2 AV	68.2	-18.0	3.97 H	340	34.9	15.3
9	21345.00	57.3 PK	74.0	-16.7	3.64 H	48	58.9	-1.6
10	21345.00	46.1 AV	54.0	-7.9	3.64 H	48	47.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.6 PK			1.30 V	201	90.1	9.5
2	*7115.00	91.5 AV			1.30 V	201	82.0	9.5
3	#7125.00	72.1 PK	88.2	-16.1	1.30 V	201	62.7	9.4
4	#7125.00	51.3 AV	68.2	-16.9	1.30 V	201	41.9	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.30 V	201	46.0	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.30 V	201	34.7	8.7
7	#14230.00	59.2 PK	88.2	-29.0	2.45 V	64	43.9	15.3
8	#14230.00	49.0 AV	68.2	-19.2	2.45 V	64	33.7	15.3
9	21345.00	57.8 PK	74.0	-16.2	1.54 V	337	59.4	-1.6
10	21345.00	46.2 AV	54.0	-7.8	1.54 V	337	47.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.4 PK	88.2	-20.8	2.25 H	128	63.1	4.3
2	#5925.00	57.4 AV	68.2	-10.8	2.25 H	128	53.1	4.3
3	*5955.00	116.5 PK			2.25 H	128	112.0	4.5
4	*5955.00	105.6 AV			2.25 H	128	101.1	4.5
5	11910.00	59.8 PK	74.0	-14.2	3.85 H	355	47.6	12.2
6	11910.00	50.4 AV	54.0	-3.6	3.85 H	355	38.2	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.69 H	51	35.4	21.9
8	17865.00	45.7 AV	54.0	-8.3	3.69 H	51	23.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.0 PK	88.2	-12.2	1.60 V	201	71.7	4.3
2	#5925.00	61.2 AV	68.2	-7.0	1.60 V	201	56.9	4.3
3	*5955.00	117.2 PK			1.60 V	201	112.7	4.5
4	*5955.00	106.2 AV			1.60 V	201	101.7	4.5
5	11910.00	59.7 PK	74.0	-14.3	2.42 V	39	47.5	12.2
6	11910.00	49.5 AV	54.0	-4.5	2.42 V	39	37.3	12.2
7	17865.00	57.7 PK	74.0	-16.3	1.55 V	322	35.8	21.9
8	17865.00	45.6 AV	54.0	-8.4	1.55 V	322	23.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.9 PK			2.25 H	120	111.1	4.8
2	*6195.00	105.2 AV			2.25 H	120	100.4	4.8
3	12390.00	60.1 PK	74.0	-13.9	3.91 H	339	47.8	12.3
4	12390.00	50.7 AV	54.0	-3.3	3.91 H	339	38.4	12.3
5	18585.00	57.3 PK	74.0	-16.7	3.63 H	63	62.3	-5.0
6	18585.00	45.5 AV	54.0	-8.5	3.63 H	63	50.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.7 PK			2.07 V	128	111.9	4.8
2	*6195.00	105.8 AV			2.07 V	128	101.0	4.8
3	12390.00	59.8 PK	74.0	-14.2	2.49 V	67	47.5	12.3
4	12390.00	49.9 AV	54.0	-4.1	2.49 V	67	37.6	12.3
5	18585.00	57.2 PK	74.0	-16.8	1.54 V	302	62.2	-5.0
6	18585.00	45.2 AV	54.0	-8.8	1.54 V	302	50.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.0 PK			2.24 H	113	110.6	6.4
2	*6415.00	106.1 AV			2.24 H	113	99.7	6.4
3	#12830.00	59.9 PK	88.2	-28.3	3.96 H	346	46.9	13.0
4	#12830.00	50.3 AV	68.2	-17.9	3.96 H	346	37.3	13.0
5	19245.00	57.4 PK	74.0	-16.6	3.68 H	56	61.2	-3.8
6	19245.00	45.6 AV	54.0	-8.4	3.68 H	56	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.4 PK			1.55 V	190	111.0	6.4
2	*6415.00	106.4 AV			1.55 V	190	100.0	6.4
3	#12830.00	59.9 PK	88.2	-28.3	2.41 V	65	46.9	13.0
4	#12830.00	49.6 AV	68.2	-18.6	2.41 V	65	36.6	13.0
5	19245.00	56.9 PK	74.0	-17.1	1.60 V	318	60.7	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.60 V	318	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.5 PK			3.01 H	228	96.1	6.4
2	*6435.00	90.7 AV			3.01 H	228	84.3	6.4
3	#12870.00	59.3 PK	88.2	-28.9	3.96 H	340	46.3	13.0
4	#12870.00	49.9 AV	68.2	-18.3	3.96 H	340	36.9	13.0
5	19305.00	57.6 PK	74.0	-16.4	3.64 H	40	61.3	-3.7
6	19305.00	46.4 AV	54.0	-7.6	3.64 H	40	50.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.2 PK			1.83 V	166	97.8	6.4
2	*6435.00	92.8 AV			1.83 V	166	86.4	6.4
3	#12870.00	59.8 PK	88.2	-28.4	2.49 V	63	46.8	13.0
4	#12870.00	49.8 AV	68.2	-18.4	2.49 V	63	36.8	13.0
5	19305.00	57.3 PK	74.0	-16.7	1.57 V	310	61.0	-3.7
6	19305.00	45.5 AV	54.0	-8.5	1.57 V	310	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.7 PK			2.28 H	128	109.1	6.6
2	*6475.00	105.1 AV			2.28 H	128	98.5	6.6
3	#12950.00	60.5 PK	88.2	-27.7	3.94 H	339	47.4	13.1
4	#12950.00	50.3 AV	68.2	-17.9	3.94 H	339	37.2	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.66 H	62	60.5	-3.8
6	19425.00	45.2 AV	54.0	-8.8	3.66 H	62	49.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.6 PK			1.62 V	187	110.0	6.6
2	*6475.00	105.9 AV			1.62 V	187	99.3	6.6
3	#12950.00	59.4 PK	88.2	-28.8	2.49 V	45	46.3	13.1
4	#12950.00	49.4 AV	68.2	-18.8	2.49 V	45	36.3	13.1
5	19425.00	57.3 PK	74.0	-16.7	1.54 V	312	61.1	-3.8
6	19425.00	45.2 AV	54.0	-8.8	1.54 V	312	49.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.0 PK			3.02 H	238	96.1	6.9
2	*6515.00	91.2 AV			3.02 H	238	84.3	6.9
3	#13030.00	59.5 PK	88.2	-28.7	3.93 H	356	46.3	13.2
4	#13030.00	50.0 AV	68.2	-18.2	3.93 H	356	36.8	13.2
5	19545.00	57.5 PK	74.0	-16.5	3.60 H	52	61.6	-4.1
6	19545.00	46.2 AV	54.0	-7.8	3.60 H	52	50.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.0 PK			1.81 V	184	97.1	6.9
2	*6515.00	92.9 AV			1.81 V	184	86.0	6.9
3	#13030.00	58.9 PK	88.2	-29.3	2.48 V	87	45.7	13.2
4	#13030.00	49.1 AV	68.2	-19.1	2.48 V	87	35.9	13.2
5	19545.00	57.4 PK	74.0	-16.6	1.54 V	326	61.5	-4.1
6	19545.00	45.8 AV	54.0	-8.2	1.54 V	326	49.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.6 PK			2.22 H	124	109.7	6.9
2	*6535.00	105.7 AV			2.22 H	124	98.8	6.9
3	#13070.00	59.9 PK	88.2	-28.3	3.89 H	350	46.7	13.2
4	#13070.00	50.6 AV	68.2	-17.6	3.89 H	350	37.4	13.2
5	19605.00	57.5 PK	74.0	-16.5	3.68 H	57	61.5	-4.0
6	19605.00	46.1 AV	54.0	-7.9	3.68 H	57	50.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.2 PK			1.65 V	214	110.3	6.9
2	*6535.00	106.4 AV			1.65 V	214	99.5	6.9
3	#13070.00	59.5 PK	88.2	-28.7	2.49 V	42	46.3	13.2
4	#13070.00	49.2 AV	68.2	-19.0	2.49 V	42	36.0	13.2
5	19605.00	57.4 PK	74.0	-16.6	1.49 V	323	61.4	-4.0
6	19605.00	45.5 AV	54.0	-8.5	1.49 V	323	49.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			2.21 H	133	109.5	7.2
2	*6695.00	105.7 AV			2.21 H	133	98.5	7.2
3	13390.00	60.5 PK	74.0	-13.5	3.88 H	339	46.5	14.0
4	13390.00	50.5 AV	54.0	-3.5	3.88 H	339	36.5	14.0
5	20085.00	57.7 PK	74.0	-16.3	3.65 H	50	61.2	-3.5
6	20085.00	45.8 AV	54.0	-8.2	3.65 H	50	49.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.2 PK			1.62 V	221	110.0	7.2
2	*6695.00	106.6 AV			1.62 V	221	99.4	7.2
3	13390.00	59.5 PK	74.0	-14.5	2.49 V	64	45.5	14.0
4	13390.00	49.5 AV	54.0	-4.5	2.49 V	64	35.5	14.0
5	20085.00	56.9 PK	74.0	-17.1	1.58 V	298	60.4	-3.5
6	20085.00	45.3 AV	54.0	-8.7	1.58 V	298	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.4 PK			2.23 H	140	109.2	7.2
2	*6855.00	105.7 AV			2.23 H	140	98.5	7.2
3	#13710.00	59.9 PK	88.2	-28.3	3.85 H	352	44.7	15.2
4	#13710.00	50.3 AV	68.2	-17.9	3.85 H	352	35.1	15.2
5	20565.00	57.2 PK	74.0	-16.8	3.72 H	43	60.5	-3.3
6	20565.00	45.8 AV	54.0	-8.2	3.72 H	43	49.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.9 PK			2.06 V	129	109.7	7.2
2	*6855.00	105.9 AV			2.06 V	129	98.7	7.2
3	#13710.00	60.4 PK	88.2	-27.8	2.47 V	44	45.2	15.2
4	#13710.00	50.0 AV	68.2	-18.2	2.47 V	44	34.8	15.2
5	20565.00	57.6 PK	74.0	-16.4	1.49 V	311	60.9	-3.3
6	20565.00	45.6 AV	54.0	-8.4	1.49 V	311	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			2.98 H	220	95.2	7.2
2	*6875.00	90.8 AV			2.98 H	220	83.6	7.2
3	#13750.00	59.1 PK	88.2	-29.1	3.98 H	341	44.0	15.1
4	#13750.00	49.8 AV	68.2	-18.4	3.98 H	341	34.7	15.1
5	20625.00	57.3 PK	74.0	-16.7	3.70 H	57	60.6	-3.3
6	20625.00	46.2 AV	54.0	-7.8	3.70 H	57	49.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.4 PK			1.81 V	170	97.2	7.2
2	*6875.00	93.4 AV			1.81 V	170	86.2	7.2
3	#13750.00	59.6 PK	88.2	-28.6	2.44 V	70	44.5	15.1
4	#13750.00	49.8 AV	68.2	-18.4	2.44 V	70	34.7	15.1
5	20625.00	57.3 PK	74.0	-16.7	1.60 V	333	60.6	-3.3
6	20625.00	45.7 AV	54.0	-8.3	1.60 V	333	49.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.2 PK			3.00 H	239	94.2	8.0
2	*6995.00	90.9 AV			3.00 H	239	82.9	8.0
3	#13990.00	59.9 PK	88.2	-28.3	3.92 H	357	44.3	15.6
4	#13990.00	50.5 AV	68.2	-17.7	3.92 H	357	34.9	15.6
5	20985.00	57.3 PK	74.0	-16.7	3.68 H	50	60.1	-2.8
6	20985.00	46.2 AV	54.0	-7.8	3.68 H	50	49.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.5 PK			1.84 V	192	95.5	8.0
2	*6995.00	92.5 AV			1.84 V	192	84.5	8.0
3	#13990.00	59.6 PK	88.2	-28.6	2.46 V	86	44.0	15.6
4	#13990.00	49.6 AV	68.2	-18.6	2.46 V	86	34.0	15.6
5	20985.00	57.9 PK	74.0	-16.1	1.54 V	333	60.7	-2.8
6	20985.00	46.0 AV	54.0	-8.0	1.54 V	333	48.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.5 PK			2.96 H	234	93.0	9.5
2	*7115.00	91.0 AV			2.96 H	234	81.5	9.5
3	#7125.00	84.3 PK	88.2	-3.9	2.96 H	234	74.9	9.4
4	#7125.00	63.6 AV	68.2	-4.6	2.96 H	234	54.2	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.96 H	234	46.5	8.7
6	7250.00	43.2 AV	54.0	-10.8	2.96 H	234	34.5	8.7
7	#14230.00	59.0 PK	88.2	-29.2	3.88 H	338	43.7	15.3
8	#14230.00	49.8 AV	68.2	-18.4	3.88 H	338	34.5	15.3
9	21345.00	57.4 PK	74.0	-16.6	3.65 H	56	59.0	-1.6
10	21345.00	46.2 AV	54.0	-7.8	3.65 H	56	47.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.2 PK			1.83 V	180	94.7	9.5
2	*7115.00	93.0 AV			1.83 V	180	83.5	9.5
3	#7125.00	86.3 PK	88.2	-1.9	1.83 V	180	76.9	9.4
4	#7125.00	66.3 AV	68.2	-1.9	1.83 V	180	56.9	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.83 V	180	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.83 V	180	34.7	8.7
7	#14230.00	59.1 PK	88.2	-29.1	2.42 V	87	43.8	15.3
8	#14230.00	49.1 AV	68.2	-19.1	2.42 V	87	33.8	15.3
9	21345.00	57.9 PK	74.0	-16.1	1.54 V	328	59.5	-1.6
10	21345.00	46.2 AV	54.0	-7.8	1.54 V	328	47.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	2.27 H	117	75.0	4.3
2	#5925.00	66.4 AV	68.2	-1.8	2.27 H	117	62.1	4.3
3	*5965.00	112.7 PK			2.27 H	117	108.3	4.4
4	*5965.00	100.7 AV			2.27 H	117	96.3	4.4
5	11930.00	60.3 PK	74.0	-13.7	3.83 H	351	48.2	12.1
6	11930.00	50.9 AV	54.0	-3.1	3.83 H	351	38.8	12.1
7	17895.00	57.1 PK	74.0	-16.9	3.72 H	56	34.8	22.3
8	17895.00	45.9 AV	54.0	-8.1	3.72 H	56	23.6	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	1.71 V	200	73.7	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.71 V	200	62.2	4.3
3	*5965.00	112.8 PK			1.71 V	200	108.4	4.4
4	*5965.00	101.5 AV			1.71 V	200	97.1	4.4
5	11930.00	59.6 PK	74.0	-14.4	2.44 V	62	47.5	12.1
6	11930.00	49.4 AV	54.0	-4.6	2.44 V	62	37.3	12.1
7	17895.00	57.2 PK	74.0	-16.8	1.59 V	326	34.9	22.3
8	17895.00	45.4 AV	54.0	-8.6	1.59 V	326	23.1	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.0 PK			2.30 H	101	109.1	4.9
2	*6205.00	102.7 AV			2.30 H	101	97.8	4.9
3	12410.00	59.9 PK	74.0	-14.1	3.94 H	360	47.6	12.3
4	12410.00	50.7 AV	54.0	-3.3	3.94 H	360	38.4	12.3
5	18615.00	57.2 PK	74.0	-16.8	3.66 H	45	62.1	-4.9
6	18615.00	45.8 AV	54.0	-8.2	3.66 H	45	50.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.2 PK			1.70 V	214	109.3	4.9
2	*6205.00	102.9 AV			1.70 V	214	98.0	4.9
3	12410.00	59.2 PK	74.0	-14.8	2.42 V	48	46.9	12.3
4	12410.00	49.2 AV	54.0	-4.8	2.42 V	48	36.9	12.3
5	18615.00	57.3 PK	74.0	-16.7	1.56 V	304	62.2	-4.9
6	18615.00	45.6 AV	54.0	-8.4	1.56 V	304	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.3 PK			2.28 H	106	107.9	6.4
2	*6405.00	103.0 AV			2.28 H	106	96.6	6.4
3	#12810.00	59.6 PK	88.2	-28.6	3.90 H	338	46.8	12.8
4	#12810.00	50.3 AV	68.2	-17.9	3.90 H	338	37.5	12.8
5	19215.00	57.9 PK	74.0	-16.1	3.65 H	50	61.6	-3.7
6	19215.00	46.4 AV	54.0	-7.6	3.65 H	50	50.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.5 PK			1.72 V	224	108.1	6.4
2	*6405.00	102.9 AV			1.72 V	224	96.5	6.4
3	#12810.00	60.0 PK	88.2	-28.2	2.42 V	62	47.2	12.8
4	#12810.00	49.6 AV	68.2	-18.6	2.42 V	62	36.8	12.8
5	19215.00	57.1 PK	74.0	-16.9	1.52 V	324	60.8	-3.7
6	19215.00	45.6 AV	54.0	-8.4	1.52 V	324	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.4 PK			2.49 H	122	96.0	6.4
2	*6445.00	91.1 AV			2.49 H	122	84.7	6.4
3	#12890.00	59.3 PK	88.2	-28.9	3.89 H	331	46.3	13.0
4	#12890.00	49.8 AV	68.2	-18.4	3.89 H	331	36.8	13.0
5	19335.00	56.9 PK	74.0	-17.1	3.61 H	53	60.6	-3.7
6	19335.00	45.8 AV	54.0	-8.2	3.61 H	53	49.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	104.6 PK			1.94 V	167	98.2	6.4
2	*6445.00	92.9 AV			1.94 V	167	86.5	6.4
3	#12890.00	59.5 PK	88.2	-28.7	2.44 V	85	46.5	13.0
4	#12890.00	49.3 AV	68.2	-18.9	2.44 V	85	36.3	13.0
5	19335.00	57.6 PK	74.0	-16.4	1.55 V	339	61.3	-3.7
6	19335.00	45.7 AV	54.0	-8.3	1.55 V	339	49.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.6 PK			2.32 H	113	106.9	6.7
2	*6485.00	102.4 AV			2.32 H	113	95.7	6.7
3	#12970.00	59.4 PK	88.2	-28.8	3.89 H	334	46.3	13.1
4	#12970.00	50.3 AV	68.2	-17.9	3.89 H	334	37.2	13.1
5	19455.00	57.8 PK	74.0	-16.2	3.65 H	44	61.7	-3.9
6	19455.00	46.5 AV	54.0	-7.5	3.65 H	44	50.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.0 PK			1.64 V	206	107.3	6.7
2	*6485.00	102.9 AV			1.64 V	206	96.2	6.7
3	#12970.00	59.8 PK	88.2	-28.4	2.42 V	69	46.7	13.1
4	#12970.00	49.3 AV	68.2	-18.9	2.42 V	69	36.2	13.1
5	19455.00	56.7 PK	74.0	-17.3	1.50 V	310	60.6	-3.9
6	19455.00	45.2 AV	54.0	-8.8	1.50 V	310	49.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.7 PK			2.49 H	115	95.8	6.9
2	*6525.00	91.1 AV			2.49 H	115	84.2	6.9
3	#13050.00	59.2 PK	88.2	-29.0	3.97 H	342	46.0	13.2
4	#13050.00	49.9 AV	68.2	-18.3	3.97 H	342	36.7	13.2
5	19575.00	57.0 PK	74.0	-17.0	3.69 H	44	61.1	-4.1
6	19575.00	46.1 AV	54.0	-7.9	3.69 H	44	50.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	104.0 PK			1.92 V	176	97.1	6.9
2	*6525.00	92.6 AV			1.92 V	176	85.7	6.9
3	#13050.00	59.2 PK	88.2	-29.0	2.52 V	85	46.0	13.2
4	#13050.00	49.5 AV	68.2	-18.7	2.52 V	85	36.3	13.2
5	19575.00	57.4 PK	74.0	-16.6	1.59 V	341	61.5	-4.1
6	19575.00	45.5 AV	54.0	-8.5	1.59 V	341	49.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.0 PK			2.27 H	104	107.1	6.9
2	*6565.00	102.9 AV			2.27 H	104	96.0	6.9
3	#13130.00	60.4 PK	88.2	-27.8	3.87 H	341	47.2	13.2
4	#13130.00	50.8 AV	68.2	-17.4	3.87 H	341	37.6	13.2
5	19695.00	58.0 PK	74.0	-16.0	3.63 H	51	61.9	-3.9
6	19695.00	46.6 AV	54.0	-7.4	3.63 H	51	50.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.3 PK			1.72 V	209	107.4	6.9
2	*6565.00	103.2 AV			1.72 V	209	96.3	6.9
3	#13130.00	60.6 PK	88.2	-27.6	2.44 V	60	47.4	13.2
4	#13130.00	50.0 AV	68.2	-18.2	2.44 V	60	36.8	13.2
5	19695.00	57.6 PK	74.0	-16.4	1.56 V	326	61.5	-3.9
6	19695.00	45.9 AV	54.0	-8.1	1.56 V	326	49.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.9 PK			2.32 H	91	106.7	7.2
2	*6685.00	102.7 AV			2.32 H	91	95.5	7.2
3	13370.00	59.9 PK	74.0	-14.1	3.90 H	337	45.9	14.0
4	13370.00	50.5 AV	54.0	-3.5	3.90 H	337	36.5	14.0
5	20055.00	57.6 PK	74.0	-16.4	3.72 H	60	61.1	-3.5
6	20055.00	46.0 AV	54.0	-8.0	3.72 H	60	49.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.1 PK			1.68 V	216	106.9	7.2
2	*6685.00	102.8 AV			1.68 V	216	95.6	7.2
3	13370.00	60.6 PK	74.0	-13.4	2.46 V	49	46.6	14.0
4	13370.00	50.0 AV	54.0	-4.0	2.46 V	49	36.0	14.0
5	20055.00	56.6 PK	74.0	-17.4	1.57 V	338	60.1	-3.5
6	20055.00	45.3 AV	54.0	-8.7	1.57 V	338	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.3 PK			2.29 H	91	107.2	7.1
2	*6845.00	103.1 AV			2.29 H	91	96.0	7.1
3	#13690.00	59.6 PK	88.2	-28.6	3.86 H	356	44.5	15.1
4	#13690.00	50.2 AV	68.2	-18.0	3.86 H	356	35.1	15.1
5	20535.00	57.4 PK	74.0	-16.6	3.72 H	43	60.6	-3.2
6	20535.00	45.8 AV	54.0	-8.2	3.72 H	43	49.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.3 PK			1.64 V	201	107.2	7.1
2	*6845.00	103.0 AV			1.64 V	201	95.9	7.1
3	#13690.00	60.6 PK	88.2	-27.6	2.42 V	66	45.5	15.1
4	#13690.00	50.0 AV	68.2	-18.2	2.42 V	66	34.9	15.1
5	20535.00	57.0 PK	74.0	-17.0	1.56 V	318	60.2	-3.2
6	20535.00	45.4 AV	54.0	-8.6	1.56 V	318	48.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	103.1 PK			2.44 H	140	95.9	7.2
2	*6885.00	91.6 AV			2.44 H	140	84.4	7.2
3	#13770.00	59.0 PK	88.2	-29.2	3.99 H	345	44.0	15.0
4	#13770.00	49.7 AV	68.2	-18.5	3.99 H	345	34.7	15.0
5	20655.00	57.3 PK	74.0	-16.7	3.69 H	66	60.6	-3.3
6	20655.00	45.9 AV	54.0	-8.1	3.69 H	66	49.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	104.2 PK			1.90 V	172	97.0	7.2
2	*6885.00	92.7 AV			1.90 V	172	85.5	7.2
3	#13770.00	59.0 PK	88.2	-29.2	2.44 V	86	44.0	15.0
4	#13770.00	49.1 AV	68.2	-19.1	2.44 V	86	34.1	15.0
5	20655.00	57.4 PK	74.0	-16.6	1.53 V	318	60.7	-3.3
6	20655.00	45.6 AV	54.0	-8.4	1.53 V	318	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	103.1 PK			2.50 H	135	95.4	7.7
2	*6965.00	91.6 AV			2.50 H	135	83.9	7.7
3	#13930.00	59.6 PK	88.2	-28.6	3.94 H	339	44.3	15.3
4	#13930.00	50.2 AV	68.2	-18.0	3.94 H	339	34.9	15.3
5	20895.00	57.7 PK	74.0	-16.3	3.68 H	41	60.4	-2.7
6	20895.00	46.3 AV	54.0	-7.7	3.68 H	41	49.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	105.1 PK			1.93 V	180	97.4	7.7
2	*6965.00	93.3 AV			1.93 V	180	85.6	7.7
3	#13930.00	59.5 PK	88.2	-28.7	2.45 V	91	44.2	15.3
4	#13930.00	49.5 AV	68.2	-18.7	2.45 V	91	34.2	15.3
5	20895.00	57.1 PK	74.0	-16.9	1.57 V	336	59.8	-2.7
6	20895.00	45.4 AV	54.0	-8.6	1.57 V	336	48.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	103.1 PK			2.48 H	126	93.9	9.2
2	*7085.00	91.5 AV			2.48 H	126	82.3	9.2
3	#7125.00	55.8 PK	88.2	-32.4	2.48 H	126	46.4	9.4
4	#7125.00	44.2 AV	68.2	-24.0	2.48 H	126	34.8	9.4
5	7250.00	55.8 PK	74.0	-18.2	2.48 H	126	47.1	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.48 H	126	34.6	8.7
7	#14170.00	59.0 PK	88.2	-29.2	3.99 H	360	43.8	15.2
8	#14170.00	49.7 AV	68.2	-18.5	3.99 H	360	34.5	15.2
9	21255.00	56.6 PK	74.0	-17.4	3.65 H	62	58.0	-1.4
10	21255.00	45.6 AV	54.0	-8.4	3.65 H	62	47.0	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.6 PK			1.95 V	173	95.4	9.2
2	*7085.00	93.0 AV			1.95 V	173	83.8	9.2
3	#7125.00	56.2 PK	88.2	-32.0	1.99 V	185	46.8	9.4
4	#7125.00	44.5 AV	68.2	-23.7	1.99 V	185	35.1	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.99 V	185	46.1	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.99 V	185	34.6	8.7
7	#14170.00	59.4 PK	88.2	-28.8	2.42 V	66	44.2	15.2
8	#14170.00	49.6 AV	68.2	-18.6	2.42 V	66	34.4	15.2
9	21255.00	57.1 PK	74.0	-16.9	1.61 V	340	58.5	-1.4
10	21255.00	45.5 AV	54.0	-8.5	1.61 V	340	46.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	2.50 H	118	69.6	4.3
2	#5925.00	62.3 AV	68.2	-5.9	2.50 H	118	58.0	4.3
3	*5985.00	109.1 PK			2.50 H	118	104.7	4.4
4	*5985.00	97.2 AV			2.50 H	118	92.8	4.4
5	11970.00	59.5 PK	74.0	-14.5	3.87 H	358	47.3	12.2
6	11970.00	50.2 AV	54.0	-3.8	3.87 H	358	38.0	12.2
7	17955.00	57.9 PK	74.0	-16.1	3.73 H	28	34.5	23.4
8	17955.00	46.1 AV	54.0	-7.9	3.73 H	28	22.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.58 V	201	72.5	4.3
2	#5925.00	65.4 AV	68.2	-2.8	1.58 V	201	61.1	4.3
3	*5985.00	109.6 PK			1.58 V	201	105.2	4.4
4	*5985.00	98.0 AV			1.58 V	201	93.6	4.4
5	11970.00	59.4 PK	74.0	-14.6	2.47 V	63	47.2	12.2
6	11970.00	49.3 AV	54.0	-4.7	2.47 V	63	37.1	12.2
7	17955.00	57.2 PK	74.0	-16.8	1.57 V	323	33.8	23.4
8	17955.00	45.5 AV	54.0	-8.5	1.57 V	323	22.1	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.6 PK			2.53 H	120	107.6	5.0
2	*6225.00	101.2 AV			2.53 H	120	96.2	5.0
3	12450.00	59.0 PK	74.0	-15.0	3.86 H	357	46.7	12.3
4	12450.00	49.9 AV	54.0	-4.1	3.86 H	357	37.6	12.3
5	18675.00	57.2 PK	74.0	-16.8	3.78 H	54	62.1	-4.9
6	18675.00	45.7 AV	54.0	-8.3	3.78 H	54	50.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.8 PK			2.05 V	128	107.8	5.0
2	*6225.00	101.7 AV			2.05 V	128	96.7	5.0
3	12450.00	59.9 PK	74.0	-14.1	2.39 V	71	47.6	12.3
4	12450.00	49.3 AV	54.0	-4.7	2.39 V	71	37.0	12.3
5	18675.00	57.2 PK	74.0	-16.8	1.51 V	313	62.1	-4.9
6	18675.00	45.5 AV	54.0	-8.5	1.51 V	313	50.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.7 PK			2.54 H	115	106.5	6.2
2	*6385.00	101.5 AV			2.54 H	115	95.3	6.2
3	#12770.00	59.2 PK	88.2	-29.0	3.86 H	353	46.4	12.8
4	#12770.00	49.9 AV	68.2	-18.3	3.86 H	353	37.1	12.8
5	19155.00	57.1 PK	74.0	-16.9	3.78 H	37	60.9	-3.8
6	19155.00	45.5 AV	54.0	-8.5	3.78 H	37	49.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.5 PK			2.10 V	129	106.3	6.2
2	*6385.00	101.6 AV			2.10 V	129	95.4	6.2
3	#12770.00	59.7 PK	88.2	-28.5	2.44 V	59	46.9	12.8
4	#12770.00	49.1 AV	68.2	-19.1	2.44 V	59	36.3	12.8
5	19155.00	57.3 PK	74.0	-16.7	1.47 V	310	61.1	-3.8
6	19155.00	45.5 AV	54.0	-8.5	1.47 V	310	49.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.4 PK			2.49 H	107	105.9	6.5
2	*6465.00	101.2 AV			2.49 H	107	94.7	6.5
3	#12930.00	59.3 PK	88.2	-28.9	3.81 H	347	46.2	13.1
4	#12930.00	49.7 AV	68.2	-18.5	3.81 H	347	36.6	13.1
5	19395.00	57.4 PK	74.0	-16.6	3.73 H	33	61.1	-3.7
6	19395.00	45.7 AV	54.0	-8.3	3.73 H	33	49.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.5 PK			2.05 V	141	106.0	6.5
2	*6465.00	101.4 AV			2.05 V	141	94.9	6.5
3	#12930.00	60.2 PK	88.2	-28.0	2.46 V	49	47.1	13.1
4	#12930.00	50.0 AV	68.2	-18.2	2.46 V	49	36.9	13.1
5	19395.00	56.6 PK	74.0	-17.4	1.48 V	326	60.3	-3.7
6	19395.00	45.2 AV	54.0	-8.8	1.48 V	326	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	102.4 PK			2.39 H	121	95.5	6.9
2	*6545.00	90.7 AV			2.39 H	121	83.8	6.9
3	#13090.00	59.6 PK	88.2	-28.6	3.92 H	356	46.4	13.2
4	#13090.00	50.4 AV	68.2	-17.8	3.92 H	356	37.2	13.2
5	19635.00	57.0 PK	74.0	-17.0	3.71 H	61	61.0	-4.0
6	19635.00	45.7 AV	54.0	-8.3	3.71 H	61	49.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	104.2 PK			1.44 V	172	97.3	6.9
2	*6545.00	92.4 AV			1.44 V	172	85.5	6.9
3	#13090.00	59.0 PK	88.2	-29.2	2.50 V	62	45.8	13.2
4	#13090.00	49.0 AV	68.2	-19.2	2.50 V	62	35.8	13.2
5	19635.00	57.9 PK	74.0	-16.1	1.51 V	319	61.9	-4.0
6	19635.00	46.1 AV	54.0	-7.9	1.51 V	319	50.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.6 PK			2.47 H	114	105.7	6.9
2	*6625.00	101.4 AV			2.47 H	114	94.5	6.9
3	13250.00	59.6 PK	74.0	-14.4	3.85 H	360	46.0	13.6
4	13250.00	50.8 AV	54.0	-3.2	3.85 H	360	37.2	13.6
5	19875.00	57.8 PK	74.0	-16.2	3.67 H	56	61.3	-3.5
6	19875.00	46.3 AV	54.0	-7.7	3.67 H	56	49.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.9 PK			2.11 V	144	106.0	6.9
2	*6625.00	102.0 AV			2.11 V	144	95.1	6.9
3	13250.00	59.7 PK	74.0	-14.3	2.44 V	63	46.1	13.6
4	13250.00	49.3 AV	54.0	-4.7	2.44 V	63	35.7	13.6
5	19875.00	57.1 PK	74.0	-16.9	1.55 V	311	60.6	-3.5
6	19875.00	45.9 AV	54.0	-8.1	1.55 V	311	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.8 PK			2.57 H	109	105.6	7.2
2	*6705.00	101.4 AV			2.57 H	109	94.2	7.2
3	#13410.00	59.4 PK	88.2	-28.8	3.90 H	357	45.2	14.2
4	#13410.00	49.8 AV	68.2	-18.4	3.90 H	357	35.6	14.2
5	20115.00	57.1 PK	74.0	-16.9	3.74 H	44	60.6	-3.5
6	20115.00	45.6 AV	54.0	-8.4	3.74 H	44	49.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.7 PK			2.10 V	135	105.5	7.2
2	*6705.00	101.5 AV			2.10 V	135	94.3	7.2
3	#13410.00	59.7 PK	88.2	-28.5	2.47 V	48	45.5	14.2
4	#13410.00	49.2 AV	68.2	-19.0	2.47 V	48	35.0	14.2
5	20115.00	57.0 PK	74.0	-17.0	1.54 V	321	60.5	-3.5
6	20115.00	45.3 AV	54.0	-8.7	1.54 V	321	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.1 PK			2.58 H	135	106.1	7.0
2	*6785.00	101.6 AV			2.58 H	135	94.6	7.0
3	#13570.00	59.2 PK	88.2	-29.0	3.91 H	360	44.6	14.6
4	#13570.00	49.9 AV	68.2	-18.3	3.91 H	360	35.3	14.6
5	20355.00	56.6 PK	74.0	-17.4	3.72 H	32	59.7	-3.1
6	20355.00	45.3 AV	54.0	-8.7	3.72 H	32	48.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.3 PK			1.99 V	133	106.3	7.0
2	*6785.00	102.0 AV			1.99 V	133	95.0	7.0
3	#13570.00	59.8 PK	88.2	-28.4	2.46 V	72	45.2	14.6
4	#13570.00	49.6 AV	68.2	-18.6	2.46 V	72	35.0	14.6
5	20355.00	56.8 PK	74.0	-17.2	1.49 V	308	59.9	-3.1
6	20355.00	45.2 AV	54.0	-8.8	1.49 V	308	48.3	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.5 PK			2.44 H	121	95.3	7.2
2	*6865.00	90.7 AV			2.44 H	121	83.5	7.2
3	#13730.00	59.6 PK	88.2	-28.6	3.92 H	360	44.5	15.1
4	#13730.00	50.3 AV	68.2	-17.9	3.92 H	360	35.2	15.1
5	20595.00	57.1 PK	74.0	-16.9	3.60 H	67	60.4	-3.3
6	20595.00	46.1 AV	54.0	-7.9	3.60 H	67	49.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.8 PK			1.41 V	196	96.6	7.2
2	*6865.00	91.9 AV			1.41 V	196	84.7	7.2
3	#13730.00	59.4 PK	88.2	-28.8	2.49 V	73	44.3	15.1
4	#13730.00	49.3 AV	68.2	-18.9	2.49 V	73	34.2	15.1
5	20595.00	57.4 PK	74.0	-16.6	1.55 V	331	60.7	-3.3
6	20595.00	45.6 AV	54.0	-8.4	1.55 V	331	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	102.9 PK			2.35 H	129	95.4	7.5
2	*6945.00	91.0 AV			2.35 H	129	83.5	7.5
3	#13890.00	59.2 PK	88.2	-29.0	3.94 H	347	44.0	15.2
4	#13890.00	49.7 AV	68.2	-18.5	3.94 H	347	34.5	15.2
5	20835.00	57.7 PK	74.0	-16.3	3.66 H	54	60.6	-2.9
6	20835.00	46.2 AV	54.0	-7.8	3.66 H	54	49.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	104.3 PK			1.43 V	199	96.8	7.5
2	*6945.00	92.4 AV			1.43 V	199	84.9	7.5
3	#13890.00	59.0 PK	88.2	-29.2	2.48 V	66	43.8	15.2
4	#13890.00	49.2 AV	68.2	-19.0	2.48 V	66	34.0	15.2
5	20835.00	58.3 PK	74.0	-15.7	1.55 V	326	61.2	-2.9
6	20835.00	46.1 AV	54.0	-7.9	1.55 V	326	49.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.9 PK			2.39 H	123	94.5	8.4
2	*7025.00	91.2 AV			2.39 H	123	82.8	8.4
3	#7125.00	59.0 PK	88.2	-29.2	2.39 H	123	49.6	9.4
4	#7125.00	44.8 AV	68.2	-23.4	2.39 H	123	35.4	9.4
5	7250.00	55.1 PK	74.0	-18.9	2.39 H	123	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	2.39 H	123	34.7	8.7
7	#14050.00	59.1 PK	88.2	-29.1	3.88 H	359	43.6	15.5
8	#14050.00	49.7 AV	68.2	-18.5	3.88 H	359	34.2	15.5
9	21075.00	57.9 PK	74.0	-16.1	3.68 H	50	60.1	-2.2
10	21075.00	46.5 AV	54.0	-7.5	3.68 H	50	48.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.1 PK			1.40 V	184	95.7	8.4
2	*7025.00	92.4 AV			1.40 V	184	84.0	8.4
3	#7125.00	56.8 PK	88.2	-31.4	1.40 V	184	47.4	9.4
4	#7125.00	45.0 AV	68.2	-23.2	1.40 V	184	35.6	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.40 V	184	46.6	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.40 V	184	34.8	8.7
7	#14050.00	59.0 PK	88.2	-29.2	2.42 V	61	43.5	15.5
8	#14050.00	48.9 AV	68.2	-19.3	2.42 V	61	33.4	15.5
9	21075.00	57.5 PK	74.0	-16.5	1.51 V	333	59.7	-2.2
10	21075.00	45.5 AV	54.0	-8.5	1.51 V	333	47.7	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	2.21 H	128	72.0	4.3
2	#5925.00	62.9 AV	68.2	-5.3	2.21 H	128	58.6	4.3
3	*6025.00	106.9 PK			2.21 H	128	102.7	4.2
4	*6025.00	94.5 AV			2.21 H	128	90.3	4.2
5	12050.00	59.4 PK	74.0	-14.6	3.81 H	348	47.0	12.4
6	12050.00	49.7 AV	54.0	-4.3	3.81 H	348	37.3	12.4
7	18075.00	57.7 PK	74.0	-16.3	3.73 H	42	62.4	-4.7
8	18075.00	46.1 AV	54.0	-7.9	3.73 H	42	50.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	1.54 V	181	73.8	4.3
2	#5925.00	65.2 AV	68.2	-3.0	1.54 V	181	60.9	4.3
3	*6025.00	107.6 PK			1.54 V	181	103.4	4.2
4	*6025.00	95.2 AV			1.54 V	181	91.0	4.2
5	12050.00	59.4 PK	74.0	-14.6	2.38 V	63	47.0	12.4
6	12050.00	49.2 AV	54.0	-4.8	2.38 V	63	36.8	12.4
7	18075.00	56.8 PK	74.0	-17.2	1.50 V	340	61.5	-4.7
8	18075.00	45.5 AV	54.0	-8.5	1.50 V	340	50.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.1 PK			2.25 H	138	102.3	4.8
2	*6185.00	94.7 AV			2.25 H	138	89.9	4.8
3	12370.00	60.0 PK	74.0	-14.0	3.91 H	350	47.7	12.3
4	12370.00	50.3 AV	54.0	-3.7	3.91 H	350	38.0	12.3
5	18555.00	57.7 PK	74.0	-16.3	3.69 H	44	62.6	-4.9
6	18555.00	46.2 AV	54.0	-7.8	3.69 H	44	51.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.2 PK			1.60 V	168	102.4	4.8
2	*6185.00	95.0 AV			1.60 V	168	90.2	4.8
3	12370.00	60.3 PK	74.0	-13.7	2.46 V	71	48.0	12.3
4	12370.00	49.8 AV	54.0	-4.2	2.46 V	71	37.5	12.3
5	18555.00	57.4 PK	74.0	-16.6	1.47 V	309	62.3	-4.9
6	18555.00	45.6 AV	54.0	-8.4	1.47 V	309	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.6 PK			2.23 H	125	100.5	6.1
2	*6345.00	94.5 AV			2.23 H	125	88.4	6.1
3	12690.00	60.1 PK	74.0	-13.9	3.81 H	343	47.2	12.9
4	12690.00	50.8 AV	54.0	-3.2	3.81 H	343	37.9	12.9
5	19035.00	57.0 PK	74.0	-17.0	3.76 H	35	60.9	-3.9
6	19035.00	45.3 AV	54.0	-8.7	3.76 H	35	49.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.0 PK			1.49 V	186	101.9	6.1
2	*6345.00	95.7 AV			1.49 V	186	89.6	6.1
3	12690.00	60.4 PK	74.0	-13.6	2.41 V	47	47.5	12.9
4	12690.00	50.0 AV	54.0	-4.0	2.41 V	47	37.1	12.9
5	19035.00	57.1 PK	74.0	-16.9	1.53 V	325	61.0	-3.9
6	19035.00	45.5 AV	54.0	-8.5	1.53 V	325	49.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.8 PK			2.23 H	134	100.0	6.8
2	*6505.00	94.2 AV			2.23 H	134	87.4	6.8
3	#13010.00	59.3 PK	88.2	-28.9	3.86 H	357	46.1	13.2
4	#13010.00	49.9 AV	68.2	-18.3	3.86 H	357	36.7	13.2
5	19515.00	56.9 PK	74.0	-17.1	3.74 H	28	61.0	-4.1
6	19515.00	45.5 AV	54.0	-8.5	3.74 H	28	49.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.5 PK			1.54 V	176	100.7	6.8
2	*6505.00	95.0 AV			1.54 V	176	88.2	6.8
3	#13010.00	60.1 PK	88.2	-28.1	2.36 V	61	46.9	13.2
4	#13010.00	49.9 AV	68.2	-18.3	2.36 V	61	36.7	13.2
5	19515.00	56.6 PK	74.0	-17.4	1.48 V	308	60.7	-4.1
6	19515.00	45.1 AV	54.0	-8.9	1.48 V	308	49.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			2.22 H	133	98.9	7.2
2	*6665.00	94.0 AV			2.22 H	133	86.8	7.2
3	13330.00	59.7 PK	74.0	-14.3	3.84 H	360	45.9	13.8
4	13330.00	50.1 AV	54.0	-3.9	3.84 H	360	36.3	13.8
5	19995.00	57.4 PK	74.0	-16.6	3.68 H	37	61.0	-3.6
6	19995.00	45.7 AV	54.0	-8.3	3.68 H	37	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.6 PK			1.53 V	168	100.4	7.2
2	*6665.00	95.5 AV			1.53 V	168	88.3	7.2
3	13330.00	59.7 PK	74.0	-14.3	2.39 V	61	45.9	13.8
4	13330.00	49.2 AV	54.0	-4.8	2.39 V	61	35.4	13.8
5	19995.00	57.1 PK	74.0	-16.9	1.57 V	329	60.7	-3.6
6	19995.00	45.6 AV	54.0	-8.4	1.57 V	329	49.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	103.4 PK			2.55 H	122	96.3	7.1
2	*6825.00	91.5 AV			2.55 H	122	84.4	7.1
3	#13650.00	59.6 PK	88.2	-28.6	3.94 H	332	44.7	14.9
4	#13650.00	50.5 AV	68.2	-17.7	3.94 H	332	35.6	14.9
5	20475.00	57.3 PK	74.0	-16.7	3.70 H	56	60.5	-3.2
6	20475.00	46.3 AV	54.0	-7.7	3.70 H	56	49.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.0 PK			1.91 V	165	96.9	7.1
2	*6825.00	91.7 AV			1.91 V	165	84.6	7.1
3	#13650.00	59.4 PK	88.2	-28.8	2.52 V	86	44.5	14.9
4	#13650.00	49.3 AV	68.2	-18.9	2.52 V	86	34.4	14.9
5	20475.00	58.0 PK	74.0	-16.0	1.54 V	320	61.2	-3.2
6	20475.00	46.3 AV	54.0	-7.7	1.54 V	320	49.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.4 PK			2.51 H	124	95.6	7.8
2	*6985.00	91.3 AV			2.51 H	124	83.5	7.8
3	#7125.00	72.2 PK	88.2	-16.0	2.51 H	124	62.8	9.4
4	#7125.00	54.6 AV	68.2	-13.6	2.51 H	124	45.2	9.4
5	7250.00	55.7 PK	74.0	-18.3	2.51 H	124	47.0	8.7
6	7250.00	44.0 AV	54.0	-10.0	2.51 H	124	35.3	8.7
7	#13970.00	59.2 PK	88.2	-29.0	3.89 H	356	43.7	15.5
8	#13970.00	49.6 AV	68.2	-18.6	3.89 H	356	34.1	15.5
9	20955.00	56.8 PK	74.0	-17.2	3.70 H	58	59.5	-2.7
10	20955.00	45.8 AV	54.0	-8.2	3.70 H	58	48.5	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.1 PK			1.90 V	173	96.3	7.8
2	*6985.00	91.9 AV			1.90 V	173	84.1	7.8
3	#7125.00	64.6 PK	88.2	-23.6	1.90 V	173	55.2	9.4
4	#7125.00	52.4 AV	68.2	-15.8	1.90 V	173	43.0	9.4
5	7250.00	55.7 PK	74.0	-18.3	1.90 V	173	47.0	8.7
6	7250.00	43.9 AV	54.0	-10.1	1.90 V	173	35.2	8.7
7	#13970.00	59.5 PK	88.2	-28.7	2.44 V	74	44.0	15.5
8	#13970.00	49.4 AV	68.2	-18.8	2.44 V	74	33.9	15.5
9	20955.00	57.2 PK	74.0	-16.8	1.53 V	324	59.9	-2.7
10	20955.00	45.3 AV	54.0	-8.7	1.53 V	324	48.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.3 PK	88.2	-12.9	2.25 H	129	71.0	4.3
2	#5925.00	55.6 AV	68.2	-12.6	2.25 H	129	51.3	4.3
3	*5955.00	122.5 PK			2.25 H	129	118.0	4.5
4	*5955.00	114.2 AV			2.25 H	129	109.7	4.5
5	11910.00	58.7 PK	74.0	-15.3	3.86 H	357	46.5	12.2
6	11910.00	48.9 AV	54.0	-5.1	3.86 H	357	36.7	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.62 H	24	35.4	21.9
8	17865.00	45.1 AV	54.0	-8.9	3.62 H	24	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	1.99 V	154	75.0	4.3
2	#5925.00	58.6 AV	68.2	-9.6	1.99 V	154	54.3	4.3
3	*5955.00	122.7 PK			1.99 V	154	118.2	4.5
4	*5955.00	114.7 AV			1.99 V	154	110.2	4.5
5	11910.00	57.7 PK	74.0	-16.3	3.62 V	64	45.5	12.2
6	11910.00	47.5 AV	54.0	-6.5	3.62 V	64	35.3	12.2
7	17865.00	54.9 PK	74.0	-19.1	1.50 V	322	33.0	21.9
8	17865.00	43.5 AV	54.0	-10.5	1.50 V	322	21.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.1 PK			2.23 H	118	117.3	4.8
2	*6195.00	113.9 AV			2.23 H	118	109.1	4.8
3	12390.00	59.2 PK	74.0	-14.8	3.84 H	347	46.9	12.3
4	12390.00	49.3 AV	54.0	-4.7	3.84 H	347	37.0	12.3
5	18585.00	56.9 PK	74.0	-17.1	3.64 H	28	61.9	-5.0
6	18585.00	44.8 AV	54.0	-9.2	3.64 H	28	49.8	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.5 PK			2.01 V	144	118.7	4.8
2	*6195.00	115.2 AV			2.01 V	144	110.4	4.8
3	12390.00	57.8 PK	74.0	-16.2	3.63 V	60	45.5	12.3
4	12390.00	47.7 AV	54.0	-6.3	3.63 V	60	35.4	12.3
5	18585.00	54.9 PK	74.0	-19.1	1.47 V	325	59.9	-5.0
6	18585.00	43.8 AV	54.0	-10.2	1.47 V	325	48.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.0 PK			2.20 H	132	116.6	6.4
2	*6415.00	114.4 AV			2.20 H	132	108.0	6.4
3	#12830.00	58.4 PK	88.2	-29.8	3.82 H	360	45.4	13.0
4	#12830.00	48.5 AV	68.2	-19.7	3.82 H	360	35.5	13.0
5	19245.00	57.5 PK	74.0	-16.5	3.61 H	15	61.3	-3.8
6	19245.00	45.3 AV	54.0	-8.7	3.61 H	15	49.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			2.04 V	145	116.3	6.4
2	*6415.00	114.8 AV			2.04 V	145	108.4	6.4
3	#12830.00	58.0 PK	88.2	-30.2	3.57 V	54	45.0	13.0
4	#12830.00	47.8 AV	68.2	-20.4	3.57 V	54	34.8	13.0
5	19245.00	55.1 PK	74.0	-18.9	1.47 V	338	58.9	-3.8
6	19245.00	43.9 AV	54.0	-10.1	1.47 V	338	47.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.8 PK			2.52 H	119	96.4	6.4
2	*6435.00	92.2 AV			2.52 H	119	85.8	6.4
3	#12870.00	58.0 PK	88.2	-30.2	3.91 H	360	45.0	13.0
4	#12870.00	48.3 AV	68.2	-19.9	3.91 H	360	35.3	13.0
5	19305.00	57.4 PK	74.0	-16.6	3.57 H	33	61.1	-3.7
6	19305.00	45.3 AV	54.0	-8.7	3.57 H	33	49.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.7 PK			2.44 V	140	97.3	6.4
2	*6435.00	92.8 AV			2.44 V	140	86.4	6.4
3	#12870.00	57.6 PK	88.2	-30.6	3.58 V	60	44.6	13.0
4	#12870.00	46.9 AV	68.2	-21.3	3.58 V	60	33.9	13.0
5	19305.00	53.9 PK	74.0	-20.1	1.53 V	305	57.6	-3.7
6	19305.00	42.8 AV	54.0	-11.2	1.53 V	305	46.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.5 PK			2.22 H	116	115.9	6.6
2	*6475.00	114.4 AV			2.22 H	116	107.8	6.6
3	#12950.00	58.4 PK	88.2	-29.8	3.89 H	344	45.3	13.1
4	#12950.00	48.6 AV	68.2	-19.6	3.89 H	344	35.5	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.61 H	19	60.5	-3.8
6	19425.00	44.8 AV	54.0	-9.2	3.61 H	19	48.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.8 PK			1.96 V	142	116.2	6.6
2	*6475.00	114.6 AV			1.96 V	142	108.0	6.6
3	#12950.00	57.1 PK	88.2	-31.1	3.62 V	49	44.0	13.1
4	#12950.00	47.1 AV	68.2	-21.1	3.62 V	49	34.0	13.1
5	19425.00	55.2 PK	74.0	-18.8	1.47 V	332	59.0	-3.8
6	19425.00	43.6 AV	54.0	-10.4	1.47 V	332	47.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.2 PK			2.56 H	102	95.3	6.9
2	*6515.00	91.6 AV			2.56 H	102	84.7	6.9
3	#13030.00	58.1 PK	88.2	-30.1	3.86 H	360	44.9	13.2
4	#13030.00	48.2 AV	68.2	-20.0	3.86 H	360	35.0	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.61 H	43	60.8	-4.1
6	19545.00	44.9 AV	54.0	-9.1	3.61 H	43	49.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.7 PK			2.38 V	139	95.8	6.9
2	*6515.00	92.2 AV			2.38 V	139	85.3	6.9
3	#13030.00	57.7 PK	88.2	-30.5	3.54 V	61	44.5	13.2
4	#13030.00	47.1 AV	68.2	-21.1	3.54 V	61	33.9	13.2
5	19545.00	54.2 PK	74.0	-19.8	1.47 V	294	58.3	-4.1
6	19545.00	42.9 AV	54.0	-11.1	1.47 V	294	47.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.5 PK			2.25 H	131	115.6	6.9
2	*6535.00	114.1 AV			2.25 H	131	107.2	6.9
3	#13070.00	58.7 PK	88.2	-29.5	3.81 H	360	45.5	13.2
4	#13070.00	49.1 AV	68.2	-19.1	3.81 H	360	35.9	13.2
5	19605.00	57.2 PK	74.0	-16.8	3.62 H	14	61.2	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.62 H	14	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.0 PK			1.97 V	144	115.1	6.9
2	*6535.00	114.2 AV			1.97 V	144	107.3	6.9
3	#13070.00	57.6 PK	88.2	-30.6	3.56 V	77	44.4	13.2
4	#13070.00	47.7 AV	68.2	-20.5	3.56 V	77	34.5	13.2
5	19605.00	55.3 PK	74.0	-18.7	1.46 V	321	59.3	-4.0
6	19605.00	43.9 AV	54.0	-10.1	1.46 V	321	47.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.29 H	139	115.1	7.2
2	*6695.00	113.9 AV			2.29 H	139	106.7	7.2
3	13390.00	58.8 PK	74.0	-15.2	3.85 H	343	44.8	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.85 H	343	34.9	14.0
5	20085.00	57.9 PK	74.0	-16.1	3.63 H	21	61.4	-3.5
6	20085.00	45.5 AV	54.0	-8.5	3.63 H	21	49.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.0 PK			2.02 V	153	114.8	7.2
2	*6695.00	114.3 AV			2.02 V	153	107.1	7.2
3	13390.00	57.4 PK	74.0	-16.6	3.64 V	77	43.4	14.0
4	13390.00	47.1 AV	54.0	-6.9	3.64 V	77	33.1	14.0
5	20085.00	54.4 PK	74.0	-19.6	1.50 V	309	57.9	-3.5
6	20085.00	43.2 AV	54.0	-10.8	1.50 V	309	46.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.9 PK			2.20 H	129	115.7	7.2
2	*6855.00	114.6 AV			2.20 H	129	107.4	7.2
3	#13710.00	58.5 PK	88.2	-29.7	3.89 H	354	43.3	15.2
4	#13710.00	48.6 AV	68.2	-19.6	3.89 H	354	33.4	15.2
5	20565.00	56.9 PK	74.0	-17.1	3.59 H	12	60.2	-3.3
6	20565.00	44.9 AV	54.0	-9.1	3.59 H	12	48.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.7 PK			1.94 V	139	115.5	7.2
2	*6855.00	114.8 AV			1.94 V	139	107.6	7.2
3	#13710.00	57.7 PK	88.2	-30.5	3.58 V	74	42.5	15.2
4	#13710.00	47.5 AV	68.2	-20.7	3.58 V	74	32.3	15.2
5	20565.00	54.5 PK	74.0	-19.5	1.51 V	313	57.8	-3.3
6	20565.00	43.2 AV	54.0	-10.8	1.51 V	313	46.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			2.46 H	102	95.6	7.2
2	*6875.00	92.2 AV			2.46 H	102	85.0	7.2
3	#13750.00	57.8 PK	88.2	-30.4	3.95 H	360	42.7	15.1
4	#13750.00	47.9 AV	68.2	-20.3	3.95 H	360	32.8	15.1
5	20625.00	57.1 PK	74.0	-16.9	3.62 H	43	60.4	-3.3
6	20625.00	45.1 AV	54.0	-8.9	3.62 H	43	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.0 PK			2.42 V	159	95.8	7.2
2	*6875.00	92.1 AV			2.42 V	159	84.9	7.2
3	#13750.00	58.0 PK	88.2	-30.2	3.64 V	75	42.9	15.1
4	#13750.00	47.3 AV	68.2	-20.9	3.64 V	75	32.2	15.1
5	20625.00	53.9 PK	74.0	-20.1	1.50 V	300	57.2	-3.3
6	20625.00	42.9 AV	54.0	-11.1	1.50 V	300	46.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.3 PK			2.52 H	110	94.3	8.0
2	*6995.00	91.6 AV			2.52 H	110	83.6	8.0
3	#13990.00	58.3 PK	88.2	-29.9	3.95 H	360	42.7	15.6
4	#13990.00	48.6 AV	68.2	-19.6	3.95 H	360	33.0	15.6
5	20985.00	57.7 PK	74.0	-16.3	3.54 H	21	60.5	-2.8
6	20985.00	45.5 AV	54.0	-8.5	3.54 H	21	48.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.4 PK			2.45 V	159	95.4	8.0
2	*6995.00	92.7 AV			2.45 V	159	84.7	8.0
3	#13990.00	57.2 PK	88.2	-31.0	3.60 V	65	41.6	15.6
4	#13990.00	46.5 AV	68.2	-21.7	3.60 V	65	30.9	15.6
5	20985.00	53.9 PK	74.0	-20.1	1.59 V	316	56.7	-2.8
6	20985.00	42.7 AV	54.0	-11.3	1.59 V	316	45.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			2.52 H	110	92.8	9.5
2	*7115.00	91.8 AV			2.52 H	110	82.3	9.5
3	#7125.00	85.3 PK	88.2	-2.9	2.52 H	110	75.9	9.4
4	#7125.00	57.6 AV	68.2	-10.6	2.52 H	110	48.2	9.4
5	7250.00	55.6 PK	74.0	-18.4	2.52 H	110	46.9	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.52 H	110	35.0	8.7
7	#14230.00	57.5 PK	88.2	-30.7	3.96 H	360	42.2	15.3
8	#14230.00	48.0 AV	68.2	-20.2	3.96 H	360	32.7	15.3
9	21345.00	57.5 PK	74.0	-16.5	3.61 H	23	59.1	-1.6
10	21345.00	45.4 AV	54.0	-8.6	3.61 H	23	47.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.1 PK			2.41 V	155	93.6	9.5
2	*7115.00	92.4 AV			2.41 V	155	82.9	9.5
3	#7125.00	85.5 PK	88.2	-2.7	2.41 V	155	76.1	9.4
4	#7125.00	58.3 AV	68.2	-9.9	2.41 V	155	48.9	9.4
5	7250.00	55.4 PK	74.0	-18.6	2.41 V	155	46.7	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.41 V	155	34.6	8.7
7	#14230.00	57.7 PK	88.2	-30.5	3.57 V	75	42.4	15.3
8	#14230.00	47.0 AV	68.2	-21.2	3.57 V	75	31.7	15.3
9	21345.00	53.9 PK	74.0	-20.1	1.48 V	292	55.5	-1.6
10	21345.00	43.0 AV	54.0	-11.0	1.48 V	292	44.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.3 PK	88.2	-4.9	2.26 H	118	79.0	4.3
2	#5925.00	63.3 AV	68.2	-4.9	2.26 H	118	59.0	4.3
3	*5955.00	121.9 PK			2.26 H	118	117.4	4.5
4	*5955.00	112.2 AV			2.26 H	118	107.7	4.5
5	11910.00	58.8 PK	74.0	-15.2	3.90 H	360	46.6	12.2
6	11910.00	48.8 AV	54.0	-5.2	3.90 H	360	36.6	12.2
7	17865.00	57.1 PK	74.0	-16.9	3.65 H	21	35.2	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.65 H	21	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.2 PK	88.2	-2.0	2.11 V	160	81.9	4.3
2	#5925.00	59.2 AV	68.2	-9.0	2.11 V	160	54.9	4.3
3	*5955.00	122.3 PK			2.11 V	160	117.8	4.5
4	*5955.00	112.2 AV			2.11 V	160	107.7	4.5
5	11910.00	57.3 PK	74.0	-16.7	3.65 V	55	45.1	12.2
6	11910.00	47.3 AV	54.0	-6.7	3.65 V	55	35.1	12.2
7	17865.00	54.7 PK	74.0	-19.3	1.55 V	323	32.8	21.9
8	17865.00	43.4 AV	54.0	-10.6	1.55 V	323	21.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.7 PK			2.30 H	110	116.9	4.8
2	*6195.00	112.1 AV			2.30 H	110	107.3	4.8
3	12390.00	58.9 PK	74.0	-15.1	3.90 H	349	46.6	12.3
4	12390.00	49.3 AV	54.0	-4.7	3.90 H	349	37.0	12.3
5	18585.00	57.3 PK	74.0	-16.7	3.62 H	28	62.3	-5.0
6	18585.00	45.1 AV	54.0	-8.9	3.62 H	28	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.3 PK			2.07 V	145	117.5	4.8
2	*6195.00	112.1 AV			2.07 V	145	107.3	4.8
3	12390.00	57.7 PK	74.0	-16.3	3.63 V	54	45.4	12.3
4	12390.00	47.3 AV	54.0	-6.7	3.63 V	54	35.0	12.3
5	18585.00	54.7 PK	74.0	-19.3	1.51 V	318	59.7	-5.0
6	18585.00	43.0 AV	54.0	-11.0	1.51 V	318	48.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.8 PK			2.31 H	129	115.4	6.4
2	*6415.00	112.0 AV			2.31 H	129	105.6	6.4
3	#12830.00	59.3 PK	88.2	-28.9	3.82 H	348	46.3	13.0
4	#12830.00	49.4 AV	68.2	-18.8	3.82 H	348	36.4	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.65 H	39	60.4	-3.8
6	19245.00	44.7 AV	54.0	-9.3	3.65 H	39	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			2.16 V	146	115.8	6.4
2	*6415.00	112.3 AV			2.16 V	146	105.9	6.4
3	#12830.00	58.2 PK	88.2	-30.0	3.61 V	48	45.2	13.0
4	#12830.00	47.8 AV	68.2	-20.4	3.61 V	48	34.8	13.0
5	19245.00	55.3 PK	74.0	-18.7	1.51 V	310	59.1	-3.8
6	19245.00	43.7 AV	54.0	-10.3	1.51 V	310	47.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.9 PK			2.58 H	97	96.5	6.4
2	*6435.00	92.0 AV			2.58 H	97	85.6	6.4
3	#12870.00	58.1 PK	88.2	-30.1	3.86 H	360	45.1	13.0
4	#12870.00	48.6 AV	68.2	-19.6	3.86 H	360	35.6	13.0
5	19305.00	57.3 PK	74.0	-16.7	3.53 H	33	61.0	-3.7
6	19305.00	44.9 AV	54.0	-9.1	3.53 H	33	48.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.5 PK			1.86 V	162	98.1	6.4
2	*6435.00	92.8 AV			1.86 V	162	86.4	6.4
3	#12870.00	57.3 PK	88.2	-30.9	3.56 V	61	44.3	13.0
4	#12870.00	46.5 AV	68.2	-21.7	3.56 V	61	33.5	13.0
5	19305.00	54.3 PK	74.0	-19.7	1.52 V	294	58.0	-3.7
6	19305.00	43.0 AV	54.0	-11.0	1.52 V	294	46.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.1 PK			2.32 H	110	115.5	6.6
2	*6475.00	112.2 AV			2.32 H	110	105.6	6.6
3	#12950.00	58.6 PK	88.2	-29.6	3.91 H	360	45.5	13.1
4	#12950.00	49.0 AV	68.2	-19.2	3.91 H	360	35.9	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.57 H	23	60.5	-3.8
6	19425.00	44.7 AV	54.0	-9.3	3.57 H	23	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.5 PK			2.10 V	163	115.9	6.6
2	*6475.00	112.4 AV			2.10 V	163	105.8	6.6
3	#12950.00	57.4 PK	88.2	-30.8	3.66 V	75	44.3	13.1
4	#12950.00	47.3 AV	68.2	-20.9	3.66 V	75	34.2	13.1
5	19425.00	54.5 PK	74.0	-19.5	1.53 V	318	58.3	-3.8
6	19425.00	43.4 AV	54.0	-10.6	1.53 V	318	47.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.0 PK			2.60 H	120	96.1	6.9
2	*6515.00	91.8 AV			2.60 H	120	84.9	6.9
3	#13030.00	57.6 PK	88.2	-30.6	3.95 H	360	44.4	13.2
4	#13030.00	47.8 AV	68.2	-20.4	3.95 H	360	34.6	13.2
5	19545.00	57.0 PK	74.0	-17.0	3.55 H	37	61.1	-4.1
6	19545.00	44.8 AV	54.0	-9.2	3.55 H	37	48.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.2 PK			1.91 V	175	97.3	6.9
2	*6515.00	92.4 AV			1.91 V	175	85.5	6.9
3	#13030.00	57.5 PK	88.2	-30.7	3.64 V	70	44.3	13.2
4	#13030.00	47.0 AV	68.2	-21.2	3.64 V	70	33.8	13.2
5	19545.00	53.7 PK	74.0	-20.3	1.52 V	315	57.8	-4.1
6	19545.00	42.5 AV	54.0	-11.5	1.52 V	315	46.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			2.25 H	104	114.7	6.9
2	*6535.00	111.8 AV			2.25 H	104	104.9	6.9
3	#13070.00	58.8 PK	88.2	-29.4	3.89 H	345	45.6	13.2
4	#13070.00	49.1 AV	68.2	-19.1	3.89 H	345	35.9	13.2
5	19605.00	57.2 PK	74.0	-16.8	3.64 H	30	61.2	-4.0
6	19605.00	45.2 AV	54.0	-8.8	3.64 H	30	49.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.7 PK			2.13 V	161	115.8	6.9
2	*6535.00	112.4 AV			2.13 V	161	105.5	6.9
3	#13070.00	57.8 PK	88.2	-30.4	3.64 V	76	44.6	13.2
4	#13070.00	47.6 AV	68.2	-20.6	3.64 V	76	34.4	13.2
5	19605.00	55.3 PK	74.0	-18.7	1.46 V	318	59.3	-4.0
6	19605.00	44.0 AV	54.0	-10.0	1.46 V	318	48.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.31 H	115	115.1	7.2
2	*6695.00	112.4 AV			2.31 H	115	105.2	7.2
3	13390.00	58.5 PK	74.0	-15.5	3.87 H	360	44.5	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.87 H	360	34.9	14.0
5	20085.00	56.8 PK	74.0	-17.2	3.61 H	10	60.3	-3.5
6	20085.00	44.9 AV	54.0	-9.1	3.61 H	10	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.7 PK			2.10 V	172	114.5	7.2
2	*6695.00	111.8 AV			2.10 V	172	104.6	7.2
3	13390.00	57.5 PK	74.0	-16.5	3.62 V	61	43.5	14.0
4	13390.00	47.5 AV	54.0	-6.5	3.62 V	61	33.5	14.0
5	20085.00	55.4 PK	74.0	-18.6	1.50 V	335	58.9	-3.5
6	20085.00	43.8 AV	54.0	-10.2	1.50 V	335	47.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.6 PK			2.26 H	105	114.4	7.2
2	*6855.00	111.9 AV			2.26 H	105	104.7	7.2
3	#13710.00	58.5 PK	88.2	-29.7	3.81 H	351	43.3	15.2
4	#13710.00	48.9 AV	68.2	-19.3	3.81 H	351	33.7	15.2
5	20565.00	57.6 PK	74.0	-16.4	3.58 H	37	60.9	-3.3
6	20565.00	45.6 AV	54.0	-8.4	3.58 H	37	48.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.3 PK			2.06 V	171	115.1	7.2
2	*6855.00	112.4 AV			2.06 V	171	105.2	7.2
3	#13710.00	57.7 PK	88.2	-30.5	3.63 V	67	42.5	15.2
4	#13710.00	47.6 AV	68.2	-20.6	3.63 V	67	32.4	15.2
5	20565.00	55.5 PK	74.0	-18.5	1.48 V	332	58.8	-3.3
6	20565.00	43.9 AV	54.0	-10.1	1.48 V	332	47.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.0 PK			2.66 H	101	94.8	7.2
2	*6875.00	91.3 AV			2.66 H	101	84.1	7.2
3	#13750.00	58.3 PK	88.2	-29.9	3.88 H	360	43.2	15.1
4	#13750.00	48.6 AV	68.2	-19.6	3.88 H	360	33.5	15.1
5	20625.00	57.8 PK	74.0	-16.2	3.56 H	19	61.1	-3.3
6	20625.00	45.5 AV	54.0	-8.5	3.56 H	19	48.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.0 PK			1.90 V	169	96.8	7.2
2	*6875.00	92.6 AV			1.90 V	169	85.4	7.2
3	#13750.00	57.3 PK	88.2	-30.9	3.63 V	67	42.2	15.1
4	#13750.00	46.8 AV	68.2	-21.4	3.63 V	67	31.7	15.1
5	20625.00	54.1 PK	74.0	-19.9	1.49 V	295	57.4	-3.3
6	20625.00	42.7 AV	54.0	-11.3	1.49 V	295	46.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.7 PK			2.65 H	110	94.7	8.0
2	*6995.00	91.6 AV			2.65 H	110	83.6	8.0
3	#13990.00	58.1 PK	88.2	-30.1	3.89 H	360	42.5	15.6
4	#13990.00	48.3 AV	68.2	-19.9	3.89 H	360	32.7	15.6
5	20985.00	57.8 PK	74.0	-16.2	3.52 H	28	60.6	-2.8
6	20985.00	45.5 AV	54.0	-8.5	3.52 H	28	48.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.5 PK			1.90 V	166	96.5	8.0
2	*6995.00	93.1 AV			1.90 V	166	85.1	8.0
3	#13990.00	57.7 PK	88.2	-30.5	3.54 V	68	42.1	15.6
4	#13990.00	47.3 AV	68.2	-20.9	3.54 V	68	31.7	15.6
5	20985.00	54.5 PK	74.0	-19.5	1.56 V	291	57.3	-2.8
6	20985.00	43.1 AV	54.0	-10.9	1.56 V	291	45.9	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.4 PK			2.62 H	108	92.9	9.5
2	*7115.00	91.5 AV			2.62 H	108	82.0	9.5
3	#7125.00	86.3 PK	88.2	-1.9	2.62 H	108	76.9	9.4
4	#7125.00	56.3 AV	68.2	-11.9	2.62 H	108	46.9	9.4
5	7250.00	55.5 PK	74.0	-18.5	2.62 H	108	46.8	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.62 H	108	35.0	8.7
7	#14230.00	58.0 PK	88.2	-30.2	3.86 H	353	42.7	15.3
8	#14230.00	48.1 AV	68.2	-20.1	3.86 H	353	32.8	15.3
9	21345.00	57.3 PK	74.0	-16.7	3.59 H	31	58.9	-1.6
10	21345.00	45.5 AV	54.0	-8.5	3.59 H	31	47.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.5 PK			1.92 V	175	95.0	9.5
2	*7115.00	92.9 AV			1.92 V	175	83.4	9.5
3	#7125.00	86.4 PK	88.2	-1.8	1.92 V	175	77.0	9.4
4	#7125.00	57.5 AV	68.2	-10.7	1.92 V	175	48.1	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.92 V	175	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.92 V	175	34.7	8.7
7	#14230.00	57.4 PK	88.2	-30.8	3.55 V	47	42.1	15.3
8	#14230.00	46.8 AV	68.2	-21.4	3.55 V	47	31.5	15.3
9	21345.00	54.6 PK	74.0	-19.4	1.59 V	307	56.2	-1.6
10	21345.00	43.2 AV	54.0	-10.8	1.59 V	307	44.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.26 H	118	73.7	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.26 H	118	55.6	4.3
3	*5955.00	120.1 PK			2.26 H	118	115.6	4.5
4	*5955.00	109.0 AV			2.26 H	118	104.5	4.5
5	11910.00	59.1 PK	74.0	-14.9	3.82 H	360	46.9	12.2
6	11910.00	49.3 AV	54.0	-4.7	3.82 H	360	37.1	12.2
7	17865.00	57.0 PK	74.0	-17.0	3.58 H	36	35.1	21.9
8	17865.00	45.0 AV	54.0	-9.0	3.58 H	36	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.17 V	168	73.7	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.17 V	168	55.6	4.3
3	*5955.00	120.5 PK			2.17 V	168	116.0	4.5
4	*5955.00	109.9 AV			2.17 V	168	105.4	4.5
5	11910.00	58.1 PK	74.0	-15.9	3.61 V	61	45.9	12.2
6	11910.00	48.0 AV	54.0	-6.0	3.61 V	61	35.8	12.2
7	17865.00	54.2 PK	74.0	-19.8	1.54 V	311	32.3	21.9
8	17865.00	43.0 AV	54.0	-11.0	1.54 V	311	21.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			2.26 H	119	115.1	4.8
2	*6195.00	108.7 AV			2.26 H	119	103.9	4.8
3	12390.00	58.8 PK	74.0	-15.2	3.91 H	360	46.5	12.3
4	12390.00	48.7 AV	54.0	-5.3	3.91 H	360	36.4	12.3
5	18585.00	57.8 PK	74.0	-16.2	3.67 H	10	62.8	-5.0
6	18585.00	45.3 AV	54.0	-8.7	3.67 H	10	50.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.8 PK			2.14 V	162	115.0	4.8
2	*6195.00	109.5 AV			2.14 V	162	104.7	4.8
3	12390.00	57.9 PK	74.0	-16.1	3.60 V	60	45.6	12.3
4	12390.00	47.9 AV	54.0	-6.1	3.60 V	60	35.6	12.3
5	18585.00	54.8 PK	74.0	-19.2	1.48 V	313	59.8	-5.0
6	18585.00	43.1 AV	54.0	-10.9	1.48 V	313	48.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.2 PK			2.21 H	114	113.8	6.4
2	*6415.00	109.0 AV			2.21 H	114	102.6	6.4
3	#12830.00	58.5 PK	88.2	-29.7	3.81 H	349	45.5	13.0
4	#12830.00	48.9 AV	68.2	-19.3	3.81 H	349	35.9	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.63 H	11	60.4	-3.8
6	19245.00	44.6 AV	54.0	-9.4	3.63 H	11	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.1 PK			2.16 V	170	113.7	6.4
2	*6415.00	109.5 AV			2.16 V	170	103.1	6.4
3	#12830.00	57.4 PK	88.2	-30.8	3.66 V	70	44.4	13.0
4	#12830.00	47.5 AV	68.2	-20.7	3.66 V	70	34.5	13.0
5	19245.00	54.6 PK	74.0	-19.4	1.49 V	337	58.4	-3.8
6	19245.00	43.1 AV	54.0	-10.9	1.49 V	337	46.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.8 PK			2.97 H	227	95.4	6.4
2	*6435.00	91.3 AV			2.97 H	227	84.9	6.4
3	#12870.00	58.2 PK	88.2	-30.0	3.94 H	360	45.2	13.0
4	#12870.00	48.3 AV	68.2	-19.9	3.94 H	360	35.3	13.0
5	19305.00	57.2 PK	74.0	-16.8	3.53 H	38	60.9	-3.7
6	19305.00	45.0 AV	54.0	-9.0	3.53 H	38	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.6 PK			1.94 V	158	96.2	6.4
2	*6435.00	92.9 AV			1.94 V	158	86.5	6.4
3	#12870.00	58.0 PK	88.2	-30.2	3.62 V	72	45.0	13.0
4	#12870.00	47.2 AV	68.2	-21.0	3.62 V	72	34.2	13.0
5	19305.00	53.7 PK	74.0	-20.3	1.53 V	301	57.4	-3.7
6	19305.00	42.9 AV	54.0	-11.1	1.53 V	301	46.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.1 PK			2.26 H	120	113.5	6.6
2	*6475.00	108.7 AV			2.26 H	120	102.1	6.6
3	#12950.00	58.7 PK	88.2	-29.5	3.83 H	352	45.6	13.1
4	#12950.00	48.8 AV	68.2	-19.4	3.83 H	352	35.7	13.1
5	19425.00	57.8 PK	74.0	-16.2	3.66 H	8	61.6	-3.8
6	19425.00	45.6 AV	54.0	-8.4	3.66 H	8	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.0 PK			2.12 V	165	114.4	6.6
2	*6475.00	110.1 AV			2.12 V	165	103.5	6.6
3	#12950.00	57.5 PK	88.2	-30.7	3.62 V	54	44.4	13.1
4	#12950.00	47.4 AV	68.2	-20.8	3.62 V	54	34.3	13.1
5	19425.00	54.4 PK	74.0	-19.6	1.48 V	334	58.2	-3.8
6	19425.00	43.2 AV	54.0	-10.8	1.48 V	334	47.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.0 PK			2.97 H	243	95.1	6.9
2	*6515.00	91.5 AV			2.97 H	243	84.6	6.9
3	#13030.00	58.2 PK	88.2	-30.0	3.85 H	360	45.0	13.2
4	#13030.00	48.7 AV	68.2	-19.5	3.85 H	360	35.5	13.2
5	19545.00	57.2 PK	74.0	-16.8	3.60 H	27	61.3	-4.1
6	19545.00	45.1 AV	54.0	-8.9	3.60 H	27	49.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.5 PK			2.00 V	172	95.6	6.9
2	*6515.00	92.4 AV			2.00 V	172	85.5	6.9
3	#13030.00	58.0 PK	88.2	-30.2	3.59 V	62	44.8	13.2
4	#13030.00	47.0 AV	68.2	-21.2	3.59 V	62	33.8	13.2
5	19545.00	54.5 PK	74.0	-19.5	1.51 V	312	58.6	-4.1
6	19545.00	43.2 AV	54.0	-10.8	1.51 V	312	47.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.5 PK			2.22 H	114	113.6	6.9
2	*6535.00	109.2 AV			2.22 H	114	102.3	6.9
3	#13070.00	58.3 PK	88.2	-29.9	3.85 H	353	45.1	13.2
4	#13070.00	48.6 AV	68.2	-19.6	3.85 H	353	35.4	13.2
5	19605.00	57.1 PK	74.0	-16.9	3.59 H	29	61.1	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.59 H	29	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.5 PK			2.19 V	173	113.6	6.9
2	*6535.00	109.7 AV			2.19 V	173	102.8	6.9
3	#13070.00	58.1 PK	88.2	-30.1	3.65 V	76	44.9	13.2
4	#13070.00	47.6 AV	68.2	-20.6	3.65 V	76	34.4	13.2
5	19605.00	55.0 PK	74.0	-19.0	1.51 V	329	59.0	-4.0
6	19605.00	43.7 AV	54.0	-10.3	1.51 V	329	47.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.1 PK			2.28 H	105	112.9	7.2
2	*6695.00	108.7 AV			2.28 H	105	101.5	7.2
3	13390.00	58.4 PK	74.0	-15.6	3.87 H	343	44.4	14.0
4	13390.00	48.8 AV	54.0	-5.2	3.87 H	343	34.8	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.59 H	33	61.0	-3.5
6	20085.00	45.4 AV	54.0	-8.6	3.59 H	33	48.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.0 PK			2.23 V	165	112.8	7.2
2	*6695.00	109.4 AV			2.23 V	165	102.2	7.2
3	13390.00	57.8 PK	74.0	-16.2	3.63 V	66	43.8	14.0
4	13390.00	47.3 AV	54.0	-6.7	3.63 V	66	33.3	14.0
5	20085.00	54.2 PK	74.0	-19.8	1.53 V	311	57.7	-3.5
6	20085.00	43.0 AV	54.0	-11.0	1.53 V	311	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.1 PK			2.27 H	112	112.9	7.2
2	*6855.00	108.8 AV			2.27 H	112	101.6	7.2
3	#13710.00	58.4 PK	88.2	-29.8	3.89 H	360	43.2	15.2
4	#13710.00	48.5 AV	68.2	-19.7	3.89 H	360	33.3	15.2
5	20565.00	57.7 PK	74.0	-16.3	3.59 H	29	61.0	-3.3
6	20565.00	45.4 AV	54.0	-8.6	3.59 H	29	48.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.9 PK			2.14 V	156	113.7	7.2
2	*6855.00	110.3 AV			2.14 V	156	103.1	7.2
3	#13710.00	57.3 PK	88.2	-30.9	3.57 V	60	42.1	15.2
4	#13710.00	47.2 AV	68.2	-21.0	3.57 V	60	32.0	15.2
5	20565.00	55.3 PK	74.0	-18.7	1.45 V	313	58.6	-3.3
6	20565.00	43.7 AV	54.0	-10.3	1.45 V	313	47.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			2.97 H	228	95.2	7.2
2	*6875.00	91.6 AV			2.97 H	228	84.4	7.2
3	#13750.00	57.9 PK	88.2	-30.3	3.88 H	360	42.8	15.1
4	#13750.00	48.3 AV	68.2	-19.9	3.88 H	360	33.2	15.1
5	20625.00	57.3 PK	74.0	-16.7	3.63 H	18	60.6	-3.3
6	20625.00	45.3 AV	54.0	-8.7	3.63 H	18	48.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.9 PK			1.94 V	183	95.7	7.2
2	*6875.00	92.8 AV			1.94 V	183	85.6	7.2
3	#13750.00	57.2 PK	88.2	-31.0	3.62 V	65	42.1	15.1
4	#13750.00	46.7 AV	68.2	-21.5	3.62 V	65	31.6	15.1
5	20625.00	53.8 PK	74.0	-20.2	1.49 V	293	57.1	-3.3
6	20625.00	42.8 AV	54.0	-11.2	1.49 V	293	46.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.9 PK			2.97 H	228	93.9	8.0
2	*6995.00	91.2 AV			2.97 H	228	83.2	8.0
3	#13990.00	58.1 PK	88.2	-30.1	3.90 H	360	42.5	15.6
4	#13990.00	48.2 AV	68.2	-20.0	3.90 H	360	32.6	15.6
5	20985.00	56.7 PK	74.0	-17.3	3.54 H	32	59.5	-2.8
6	20985.00	44.8 AV	54.0	-9.2	3.54 H	32	47.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.1 PK			1.99 V	167	94.1	8.0
2	*6995.00	92.4 AV			1.99 V	167	84.4	8.0
3	#13990.00	58.3 PK	88.2	-29.9	3.60 V	47	42.7	15.6
4	#13990.00	47.4 AV	68.2	-20.8	3.60 V	47	31.8	15.6
5	20985.00	53.5 PK	74.0	-20.5	1.52 V	308	56.3	-2.8
6	20985.00	42.5 AV	54.0	-11.5	1.52 V	308	45.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.7 PK			2.97 H	241	92.2	9.5
2	*7115.00	91.2 AV			2.97 H	241	81.7	9.5
3	#7125.00	85.5 PK	88.2	-2.7	2.97 H	241	76.1	9.4
4	#7125.00	57.2 AV	68.2	-11.0	2.97 H	241	47.8	9.4
5	7250.00	54.7 PK	74.0	-19.3	2.97 H	241	46.0	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.97 H	241	34.6	8.7
7	#14230.00	57.9 PK	88.2	-30.3	3.90 H	360	42.6	15.3
8	#14230.00	48.0 AV	68.2	-20.2	3.90 H	360	32.7	15.3
9	21345.00	57.5 PK	74.0	-16.5	3.59 H	41	59.1	-1.6
10	21345.00	45.4 AV	54.0	-8.6	3.59 H	41	47.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			1.96 V	174	92.8	9.5
2	*7115.00	92.5 AV			1.96 V	174	83.0	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.96 V	174	77.1	9.4
4	#7125.00	58.6 AV	68.2	-9.6	1.96 V	174	49.2	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.96 V	174	46.1	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.96 V	174	34.8	8.7
7	#14230.00	57.0 PK	88.2	-31.2	3.64 V	72	41.7	15.3
8	#14230.00	46.5 AV	68.2	-21.7	3.64 V	72	31.2	15.3
9	21345.00	53.9 PK	74.0	-20.1	1.55 V	292	55.5	-1.6
10	21345.00	43.0 AV	54.0	-11.0	1.55 V	292	44.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.00 H	0	70.8	4.3
2	#5925.00	50.8 AV	68.2	-17.4	1.00 H	0	46.5	4.3
3	*5955.00	119.8 PK			2.33 H	132	115.3	4.5
4	*5955.00	109.6 AV			2.33 H	132	105.1	4.5
5	11910.00	50.9 PK	74.0	-23.1	3.85 H	360	38.7	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.85 H	360	26.3	12.2
7	17865.00	55.4 PK	74.0	-18.6	3.80 H	297	33.5	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.80 H	297	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.00 V	0	71.5	4.3
2	#5925.00	53.2 AV	68.2	-15.0	1.00 V	0	48.9	4.3
3	*5955.00	120.8 PK			1.39 V	157	116.3	4.5
4	*5955.00	111.0 AV			1.39 V	157	106.5	4.5
5	11910.00	50.7 PK	74.0	-23.3	3.18 V	342	38.5	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.18 V	342	26.1	12.2
7	17865.00	54.0 PK	74.0	-20.0	3.45 V	152	32.1	21.9
8	17865.00	41.0 AV	54.0	-13.0	3.45 V	152	19.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.3 PK			2.45 H	113	95.7	6.6
2	*6475.00	91.5 AV			2.45 H	113	84.9	6.6
3	#12950.00	57.6 PK	88.2	-30.6	3.92 H	360	44.5	13.1
4	#12950.00	48.1 AV	68.2	-20.1	3.92 H	360	35.0	13.1
5	19425.00	56.4 PK	74.0	-17.6	3.56 H	43	60.2	-3.8
6	19425.00	44.7 AV	54.0	-9.3	3.56 H	43	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.0 PK			1.98 V	160	96.4	6.6
2	*6475.00	92.4 AV			1.98 V	160	85.8	6.6
3	#12950.00	57.5 PK	88.2	-30.7	3.59 V	57	44.4	13.1
4	#12950.00	46.5 AV	68.2	-21.7	3.59 V	57	33.4	13.1
5	19425.00	53.9 PK	74.0	-20.1	1.52 V	282	57.7	-3.8
6	19425.00	43.2 AV	54.0	-10.8	1.52 V	282	47.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.7 PK			2.49 H	111	95.5	7.2
2	*6695.00	91.9 AV			2.49 H	111	84.7	7.2
3	13390.00	57.0 PK	74.0	-17.0	3.91 H	360	43.0	14.0
4	13390.00	47.6 AV	54.0	-6.4	3.91 H	360	33.6	14.0
5	20085.00	56.7 PK	74.0	-17.3	3.61 H	57	60.2	-3.5
6	20085.00	44.8 AV	54.0	-9.2	3.61 H	57	48.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.9 PK			1.97 V	160	95.7	7.2
2	*6695.00	92.5 AV			1.97 V	160	85.3	7.2
3	13390.00	57.9 PK	74.0	-16.1	3.60 V	50	43.9	14.0
4	13390.00	46.7 AV	54.0	-7.3	3.60 V	50	32.7	14.0
5	20085.00	54.1 PK	74.0	-19.9	1.47 V	270	57.6	-3.5
6	20085.00	43.6 AV	54.0	-10.4	1.47 V	270	47.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			2.51 H	123	92.8	9.5
2	*7115.00	91.6 AV			2.51 H	123	82.1	9.5
3	#7125.00	64.7 PK	88.2	-23.5	2.51 H	123	55.3	9.4
4	#7125.00	44.3 AV	68.2	-23.9	2.51 H	123	34.9	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.51 H	123	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	2.51 H	123	34.7	8.7
7	#14230.00	58.0 PK	88.2	-30.2	3.90 H	360	42.7	15.3
8	#14230.00	48.3 AV	68.2	-19.9	3.90 H	360	33.0	15.3
9	21345.00	56.7 PK	74.0	-17.3	3.59 H	34	58.3	-1.6
10	21345.00	44.8 AV	54.0	-9.2	3.59 H	34	46.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.6 PK			1.96 V	175	94.1	9.5
2	*7115.00	92.8 AV			1.96 V	175	83.3	9.5
3	#7125.00	64.8 PK	88.2	-23.4	1.96 V	175	55.4	9.4
4	#7125.00	44.6 AV	68.2	-23.6	1.96 V	175	35.2	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.96 V	175	46.8	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.96 V	175	34.7	8.7
7	#14230.00	57.8 PK	88.2	-30.4	3.53 V	53	42.5	15.3
8	#14230.00	47.0 AV	68.2	-21.2	3.53 V	53	31.7	15.3
9	21345.00	54.0 PK	74.0	-20.0	1.57 V	290	55.6	-1.6
10	21345.00	43.2 AV	54.0	-10.8	1.57 V	290	44.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.0 PK	88.2	-15.2	1.00 H	0	68.7	4.3
2	#5925.00	54.4 AV	68.2	-13.8	1.00 H	0	50.1	4.3
3	*5955.00	117.0 PK			2.22 H	132	112.5	4.5
4	*5955.00	107.1 AV			2.22 H	132	102.6	4.5
5	11910.00	51.5 PK	74.0	-22.5	3.85 H	356	39.3	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.85 H	356	26.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.79 H	309	34.4	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.79 H	309	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	1.00 V	0	69.3	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.00 V	0	53.6	4.3
3	*5955.00	119.3 PK			1.47 V	199	114.8	4.5
4	*5955.00	108.7 AV			1.47 V	199	104.2	4.5
5	11910.00	50.9 PK	74.0	-23.1	3.28 V	328	38.7	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.28 V	328	26.3	12.2
7	17865.00	54.3 PK	74.0	-19.7	3.55 V	131	32.4	21.9
8	17865.00	41.4 AV	54.0	-12.6	3.55 V	131	19.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.5 PK			2.90 H	227	93.9	6.6
2	*6475.00	89.9 AV			2.90 H	227	83.3	6.6
3	#12950.00	57.9 PK	88.2	-30.3	3.86 H	358	44.8	13.1
4	#12950.00	48.1 AV	68.2	-20.1	3.86 H	358	35.0	13.1
5	19425.00	57.5 PK	74.0	-16.5	3.60 H	8	61.3	-3.8
6	19425.00	45.5 AV	54.0	-8.5	3.60 H	8	49.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.0 PK			1.15 V	17	95.4	6.6
2	*6475.00	91.3 AV			1.15 V	17	84.7	6.6
3	#12950.00	57.6 PK	88.2	-30.6	3.53 V	82	44.5	13.1
4	#12950.00	46.8 AV	68.2	-21.4	3.53 V	82	33.7	13.1
5	19425.00	53.8 PK	74.0	-20.2	1.48 V	297	57.6	-3.8
6	19425.00	42.8 AV	54.0	-11.2	1.48 V	297	46.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	100.0 PK			2.93 H	228	92.8	7.2
2	*6695.00	89.4 AV			2.93 H	228	82.2	7.2
3	13390.00	57.8 PK	74.0	-16.2	3.87 H	360	43.8	14.0
4	13390.00	48.1 AV	54.0	-5.9	3.87 H	360	34.1	14.0
5	20085.00	57.4 PK	74.0	-16.6	3.57 H	2	60.9	-3.5
6	20085.00	45.1 AV	54.0	-8.9	3.57 H	2	48.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.2 PK			1.12 V	16	95.0	7.2
2	*6695.00	91.2 AV			1.12 V	16	84.0	7.2
3	13390.00	57.5 PK	74.0	-16.5	3.58 V	89	43.5	14.0
4	13390.00	46.9 AV	54.0	-7.1	3.58 V	89	32.9	14.0
5	20085.00	54.1 PK	74.0	-19.9	1.43 V	291	57.6	-3.5
6	20085.00	42.9 AV	54.0	-11.1	1.43 V	291	46.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			2.96 H	234	91.5	9.5
2	*7115.00	90.4 AV			2.96 H	234	80.9	9.5
3	#7125.00	85.6 PK	88.2	-2.6	2.96 H	234	76.2	9.4
4	#7125.00	55.5 AV	68.2	-12.7	2.96 H	234	46.1	9.4
5	7250.00	54.9 PK	74.0	-19.1	2.96 H	234	46.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	2.96 H	234	34.8	8.7
7	#14230.00	58.0 PK	88.2	-30.2	3.88 H	357	42.7	15.3
8	#14230.00	48.2 AV	68.2	-20.0	3.88 H	357	32.9	15.3
9	21345.00	57.5 PK	74.0	-16.5	3.60 H	24	59.1	-1.6
10	21345.00	45.3 AV	54.0	-8.7	3.60 H	24	46.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.7 PK			1.20 V	18	92.2	9.5
2	*7115.00	91.1 AV			1.20 V	18	81.6	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.20 V	18	77.1	9.4
4	#7125.00	56.9 AV	68.2	-11.3	1.20 V	18	47.5	9.4
5	7250.00	54.5 PK	74.0	-19.5	1.20 V	18	45.8	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.20 V	18	34.7	8.7
7	#14230.00	57.5 PK	88.2	-30.7	3.55 V	72	42.2	15.3
8	#14230.00	46.9 AV	68.2	-21.3	3.55 V	72	31.6	15.3
9	21345.00	53.8 PK	74.0	-20.2	1.48 V	292	55.4	-1.6
10	21345.00	42.6 AV	54.0	-11.4	1.48 V	292	44.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	1.00 H	0	73.3	4.3
2	#5925.00	63.8 AV	68.2	-4.4	1.00 H	0	59.5	4.3
3	*5985.00	108.5 PK			2.19 H	134	104.1	4.4
4	*5985.00	97.4 AV			2.19 H	134	93.0	4.4
5	11970.00	51.3 PK	74.0	-22.7	3.87 H	357	39.1	12.2
6	11970.00	38.7 AV	54.0	-15.3	3.87 H	357	26.5	12.2
7	17955.00	56.1 PK	74.0	-17.9	3.79 H	301	32.7	23.4
8	17955.00	44.6 AV	54.0	-9.4	3.79 H	301	21.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.9 PK	88.2	-9.3	1.00 V	0	74.6	4.3
2	#5925.00	64.6 AV	68.2	-3.6	1.00 V	0	60.3	4.3
3	*5985.00	110.9 PK			2.08 V	227	106.5	4.4
4	*5985.00	99.0 AV			2.08 V	227	94.6	4.4
5	11970.00	50.6 PK	74.0	-23.4	3.25 V	346	38.4	12.2
6	11970.00	38.2 AV	54.0	-15.8	3.25 V	346	26.0	12.2
7	17955.00	54.4 PK	74.0	-19.6	3.45 V	149	31.0	23.4
8	17955.00	41.1 AV	54.0	-12.9	3.45 V	149	17.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.7 PK			2.56 H	122	97.2	6.5
2	*6465.00	91.4 AV			2.56 H	122	84.9	6.5
3	#12930.00	57.9 PK	88.2	-30.3	3.84 H	360	44.8	13.1
4	#12930.00	48.7 AV	68.2	-19.5	3.84 H	360	35.6	13.1
5	19395.00	56.8 PK	74.0	-17.2	3.52 H	36	60.5	-3.7
6	19395.00	45.2 AV	54.0	-8.8	3.52 H	36	48.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.2 PK			2.17 V	189	96.7	6.5
2	*6465.00	91.4 AV			2.17 V	189	84.9	6.5
3	#12930.00	57.3 PK	88.2	-30.9	3.56 V	54	44.2	13.1
4	#12930.00	46.8 AV	68.2	-21.4	3.56 V	54	33.7	13.1
5	19395.00	54.4 PK	74.0	-19.6	1.51 V	332	58.1	-3.7
6	19395.00	43.1 AV	54.0	-10.9	1.51 V	332	46.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.9 PK			2.51 H	111	96.7	7.2
2	*6705.00	91.6 AV			2.51 H	111	84.4	7.2
3	#13410.00	58.0 PK	88.2	-30.2	3.86 H	352	43.8	14.2
4	#13410.00	48.6 AV	68.2	-19.6	3.86 H	352	34.4	14.2
5	20115.00	56.6 PK	74.0	-17.4	3.47 H	26	60.1	-3.5
6	20115.00	45.2 AV	54.0	-8.8	3.47 H	26	48.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.7 PK			2.11 V	193	96.5	7.2
2	*6705.00	92.2 AV			2.11 V	193	85.0	7.2
3	#13410.00	57.6 PK	88.2	-30.6	3.61 V	50	43.4	14.2
4	#13410.00	46.9 AV	68.2	-21.3	3.61 V	50	32.7	14.2
5	20115.00	53.5 PK	74.0	-20.5	1.55 V	307	57.0	-3.5
6	20115.00	42.2 AV	54.0	-11.8	1.55 V	307	45.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.1 PK			2.52 H	125	95.7	8.4
2	*7025.00	91.7 AV			2.52 H	125	83.3	8.4
3	#7125.00	56.8 PK	88.2	-31.4	2.52 H	125	47.4	9.4
4	#7125.00	45.2 AV	68.2	-23.0	2.52 H	125	35.8	9.4
5	7250.00	55.9 PK	74.0	-18.1	2.52 H	125	47.2	8.7
6	7250.00	43.6 AV	54.0	-10.4	2.52 H	125	34.9	8.7
7	#14050.00	58.3 PK	88.2	-29.9	3.89 H	360	42.8	15.5
8	#14050.00	48.8 AV	68.2	-19.4	3.89 H	360	33.3	15.5
9	21075.00	56.8 PK	74.0	-17.2	3.52 H	39	59.0	-2.2
10	21075.00	44.9 AV	54.0	-9.1	3.52 H	39	47.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.3 PK			2.13 V	186	94.9	8.4
2	*7025.00	91.7 AV			2.13 V	186	83.3	8.4
3	#7125.00	56.6 PK	88.2	-31.6	2.13 V	186	47.2	9.4
4	#7125.00	45.0 AV	68.2	-23.2	2.13 V	186	35.6	9.4
5	7250.00	55.0 PK	74.0	-19.0	2.13 V	186	46.3	8.7
6	7250.00	43.2 AV	54.0	-10.8	2.13 V	186	34.5	8.7
7	#14050.00	57.4 PK	88.2	-30.8	3.62 V	60	41.9	15.5
8	#14050.00	46.8 AV	68.2	-21.4	3.62 V	60	31.3	15.5
9	21075.00	54.0 PK	74.0	-20.0	1.49 V	320	56.2	-2.2
10	21075.00	42.6 AV	54.0	-11.4	1.49 V	320	44.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	2.19 H	133	69.4	4.3
2	#5925.00	59.4 AV	68.2	-8.8	2.19 H	133	55.1	4.3
3	*6025.00	106.2 PK			2.19 H	133	102.0	4.2
4	*6025.00	93.0 AV			2.19 H	133	88.8	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.87 H	347	39.1	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.87 H	347	26.4	12.4
7	18075.00	56.5 PK	74.0	-17.5	3.82 H	286	61.2	-4.7
8	18075.00	44.8 AV	54.0	-9.2	3.82 H	286	49.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.6 PK	88.2	-13.6	1.00 V	0	70.3	4.3
2	#5925.00	59.7 AV	68.2	-8.5	1.00 V	0	55.4	4.3
3	*6025.00	106.1 PK			1.38 V	196	101.9	4.2
4	*6025.00	94.8 AV			1.38 V	196	90.6	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.25 V	337	38.4	12.4
6	12050.00	38.4 AV	54.0	-15.6	3.25 V	337	26.0	12.4
7	18075.00	53.8 PK	74.0	-20.2	3.51 V	135	58.5	-4.7
8	18075.00	40.9 AV	54.0	-13.1	3.51 V	135	45.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.2 PK			2.57 H	111	96.4	6.8
2	*6505.00	91.2 AV			2.57 H	111	84.4	6.8
3	#13010.00	58.3 PK	88.2	-29.9	3.86 H	360	45.1	13.2
4	#13010.00	48.4 AV	68.2	-19.8	3.86 H	360	35.2	13.2
5	19515.00	58.4 PK	74.0	-15.6	3.65 H	35	62.5	-4.1
6	19515.00	45.9 AV	54.0	-8.1	3.65 H	35	50.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.4 PK			2.05 V	200	96.6	6.8
2	*6505.00	91.5 AV			2.05 V	200	84.7	6.8
3	#13010.00	58.5 PK	88.2	-29.7	3.54 V	45	45.3	13.2
4	#13010.00	47.3 AV	68.2	-20.9	3.54 V	45	34.1	13.2
5	19515.00	53.6 PK	74.0	-20.4	1.61 V	294	57.7	-4.1
6	19515.00	43.0 AV	54.0	-11.0	1.61 V	294	47.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.2 PK			2.54 H	119	96.0	7.2
2	*6665.00	91.4 AV			2.54 H	119	84.2	7.2
3	13330.00	58.9 PK	74.0	-15.1	3.88 H	359	45.1	13.8
4	13330.00	48.9 AV	54.0	-5.1	3.88 H	359	35.1	13.8
5	19995.00	58.9 PK	74.0	-15.1	3.69 H	38	62.5	-3.6
6	19995.00	46.3 AV	54.0	-7.7	3.69 H	38	49.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.2 PK			2.06 V	205	96.0	7.2
2	*6665.00	91.2 AV			2.06 V	205	84.0	7.2
3	13330.00	58.5 PK	74.0	-15.5	3.52 V	58	44.7	13.8
4	13330.00	47.3 AV	54.0	-6.7	3.52 V	58	33.5	13.8
5	19995.00	54.1 PK	74.0	-19.9	1.64 V	282	57.7	-3.6
6	19995.00	43.3 AV	54.0	-10.7	1.64 V	282	46.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.3 PK			2.54 H	123	95.5	7.8
2	*6985.00	91.6 AV			2.54 H	123	83.8	7.8
3	#7125.00	68.5 PK	88.2	-19.7	2.54 H	123	59.1	9.4
4	#7125.00	51.5 AV	68.2	-16.7	2.54 H	123	42.1	9.4
5	7250.00	55.6 PK	74.0	-18.4	2.54 H	123	46.9	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.54 H	123	35.0	8.7
7	#13970.00	58.3 PK	88.2	-29.9	3.90 H	360	42.8	15.5
8	#13970.00	48.6 AV	68.2	-19.6	3.90 H	360	33.1	15.5
9	20955.00	57.6 PK	74.0	-16.4	3.60 H	25	60.3	-2.7
10	20955.00	45.4 AV	54.0	-8.6	3.60 H	25	48.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.5 PK			2.00 V	188	95.7	7.8
2	*6985.00	91.8 AV			2.00 V	188	84.0	7.8
3	#7125.00	70.1 PK	88.2	-18.1	2.00 V	188	60.7	9.4
4	#7125.00	51.8 AV	68.2	-16.4	2.00 V	188	42.4	9.4
5	7250.00	55.7 PK	74.0	-18.3	2.00 V	188	47.0	8.7
6	7250.00	43.8 AV	54.0	-10.2	2.00 V	188	35.1	8.7
7	#13970.00	57.9 PK	88.2	-30.3	3.54 V	51	42.4	15.5
8	#13970.00	46.9 AV	68.2	-21.3	3.54 V	51	31.4	15.5
9	20955.00	53.4 PK	74.0	-20.6	1.57 V	296	56.1	-2.7
10	20955.00	42.6 AV	54.0	-11.4	1.57 V	296	45.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	2.20 H	133	74.5	4.3
2	#5925.00	61.3 AV	68.2	-6.9	2.20 H	133	57.0	4.3
3	*6025.00	104.8 PK			2.20 H	133	100.6	4.2
4	*6025.00	93.2 AV			2.20 H	133	89.0	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.86 H	360	39.1	12.4
6	12050.00	39.0 AV	54.0	-15.0	3.86 H	360	26.6	12.4
7	18075.00	56.6 PK	74.0	-17.4	3.79 H	311	61.3	-4.7
8	18075.00	45.1 AV	54.0	-8.9	3.79 H	311	49.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.7 PK	88.2	-7.5	1.31 V	198	76.4	4.3
2	#5925.00	63.1 AV	68.2	-5.1	1.31 V	198	58.8	4.3
3	*6025.00	106.4 PK			1.31 V	198	102.2	4.2
4	*6025.00	94.6 AV			1.31 V	198	90.4	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.19 V	322	39.1	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.19 V	322	26.4	12.4
7	18075.00	54.2 PK	74.0	-19.8	3.54 V	132	58.9	-4.7
8	18075.00	41.3 AV	54.0	-12.7	3.54 V	132	46.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.6 PK			2.34 H	142	95.8	6.8
2	*6505.00	90.9 AV			2.34 H	142	84.1	6.8
3	#13010.00	57.3 PK	88.2	-30.9	3.85 H	360	44.1	13.2
4	#13010.00	47.6 AV	68.2	-20.6	3.85 H	360	34.4	13.2
5	19515.00	57.0 PK	74.0	-17.0	3.62 H	17	61.1	-4.1
6	19515.00	45.4 AV	54.0	-8.6	3.62 H	17	49.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.6 PK			1.97 V	167	97.8	6.8
2	*6505.00	91.8 AV			1.97 V	167	85.0	6.8
3	#13010.00	57.3 PK	88.2	-30.9	3.56 V	67	44.1	13.2
4	#13010.00	46.8 AV	68.2	-21.4	3.56 V	67	33.6	13.2
5	19515.00	54.1 PK	74.0	-19.9	1.50 V	283	58.2	-4.1
6	19515.00	43.1 AV	54.0	-10.9	1.50 V	283	47.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.8 PK			2.39 H	143	94.6	7.2
2	*6665.00	90.4 AV			2.39 H	143	83.2	7.2
3	13330.00	57.9 PK	74.0	-16.1	3.81 H	360	44.1	13.8
4	13330.00	48.0 AV	54.0	-6.0	3.81 H	360	34.2	13.8
5	19995.00	57.5 PK	74.0	-16.5	3.63 H	26	61.1	-3.6
6	19995.00	45.7 AV	54.0	-8.3	3.63 H	26	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.9 PK			1.96 V	152	97.7	7.2
2	*6665.00	92.0 AV			1.96 V	152	84.8	7.2
3	13330.00	57.5 PK	74.0	-16.5	3.50 V	81	43.7	13.8
4	13330.00	47.0 AV	54.0	-7.0	3.50 V	81	33.2	13.8
5	19995.00	54.6 PK	74.0	-19.4	1.52 V	277	58.2	-3.6
6	19995.00	43.3 AV	54.0	-10.7	1.52 V	277	46.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.