

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.0 PK			2.32 H	126	95.2	7.8
2	*6985.00	91.4 AV			2.32 H	126	83.6	7.8
3	#7125.00	70.3 PK	88.2	-17.9	2.32 H	126	60.9	9.4
4	#7125.00	53.7 AV	68.2	-14.5	2.32 H	126	44.3	9.4
5	7250.00	55.6 PK	74.0	-18.4	2.32 H	126	46.9	8.7
6	7250.00	43.8 AV	54.0	-10.2	2.32 H	126	35.1	8.7
7	#13970.00	57.5 PK	88.2	-30.7	3.88 H	360	42.0	15.5
8	#13970.00	48.0 AV	68.2	-20.2	3.88 H	360	32.5	15.5
9	20955.00	57.5 PK	74.0	-16.5	3.59 H	27	60.2	-2.7
10	20955.00	45.6 AV	54.0	-8.4	3.59 H	27	48.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.3 PK			2.00 V	179	96.5	7.8
2	*6985.00	91.6 AV			2.00 V	179	83.8	7.8
3	#7125.00	68.9 PK	88.2	-19.3	2.00 V	179	59.5	9.4
4	#7125.00	54.8 AV	68.2	-13.4	2.00 V	179	45.4	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.00 V	179	46.5	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.00 V	179	35.0	8.7
7	#13970.00	57.3 PK	88.2	-30.9	3.62 V	62	41.8	15.5
8	#13970.00	46.8 AV	68.2	-21.4	3.62 V	62	31.3	15.5
9	20955.00	53.9 PK	74.0	-20.1	1.51 V	296	56.6	-2.7
10	20955.00	43.0 AV	54.0	-11.0	1.51 V	296	45.7	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode A

2Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

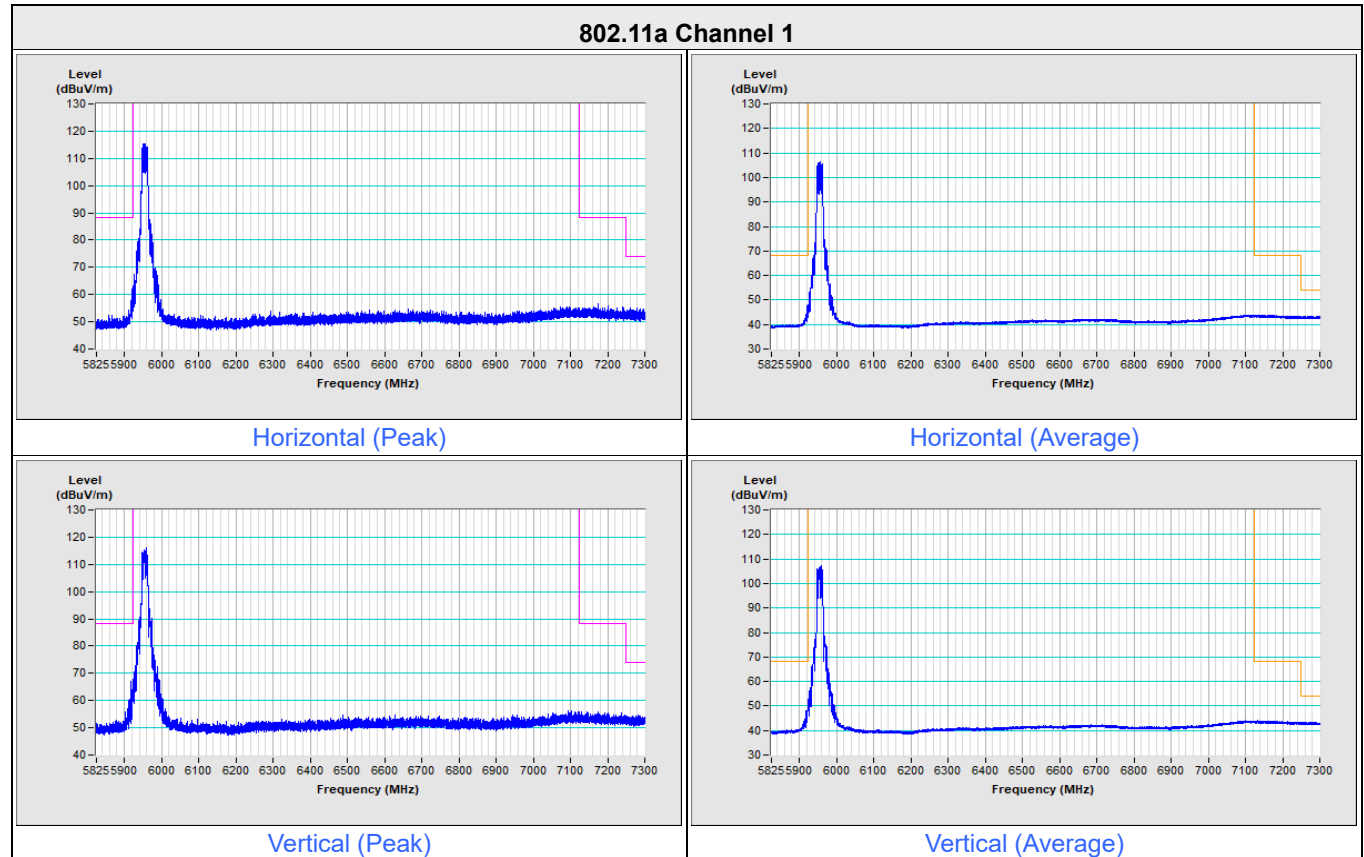


802.11a Channel 233

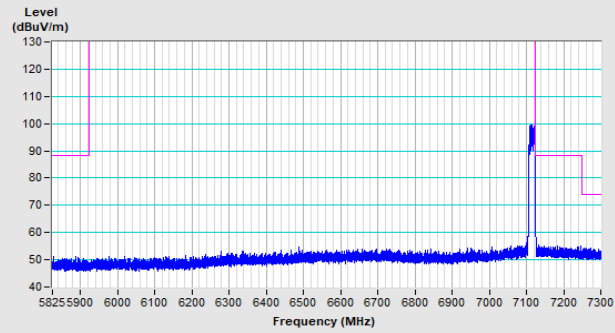


Horizontal (Peak)

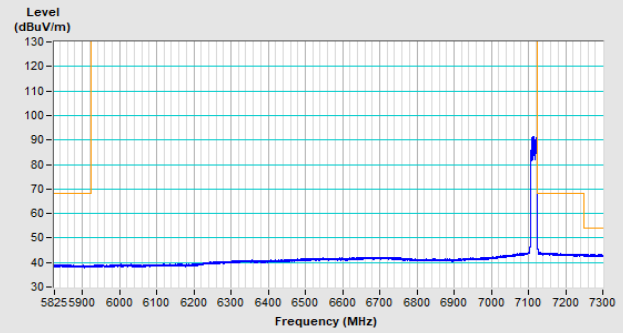

Horizontal (Average)

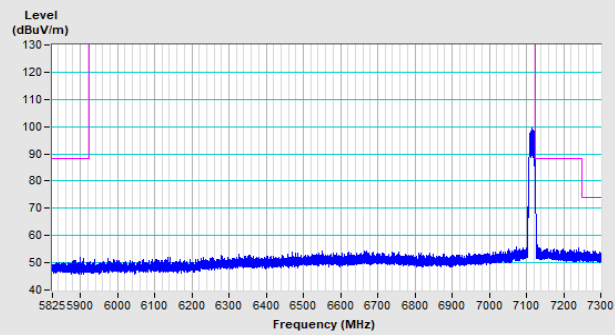


Vertical (Peak)

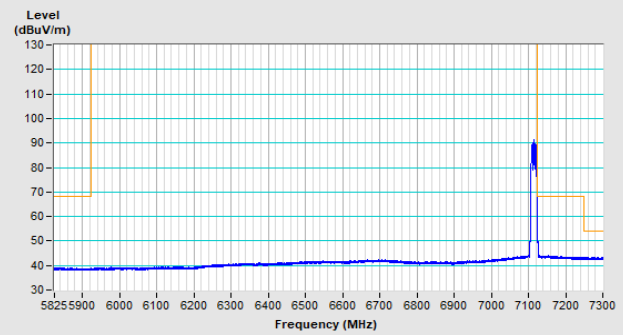


Vertical (Average)

2Tx NSS2


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

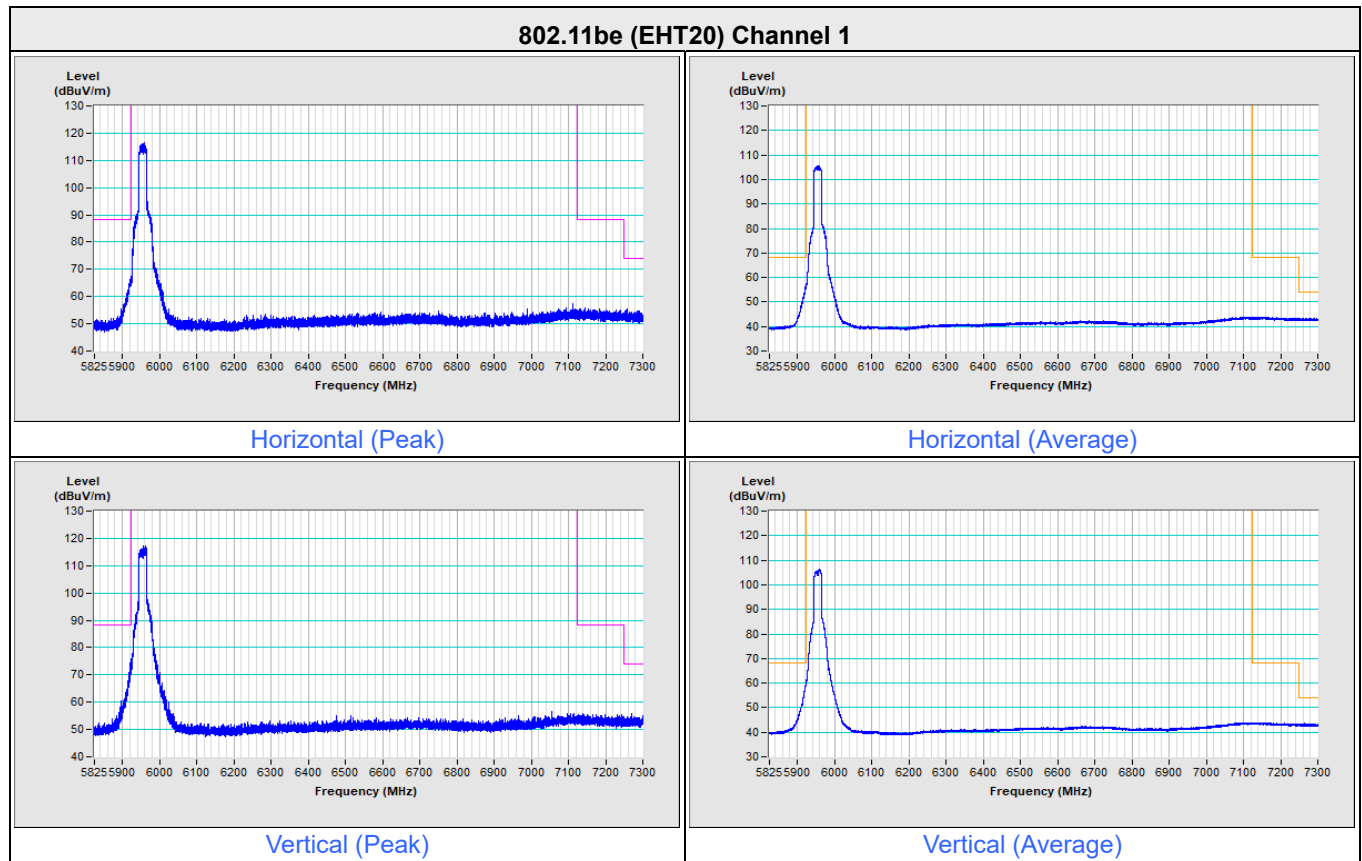

802.11be (EHT20) Channel 233

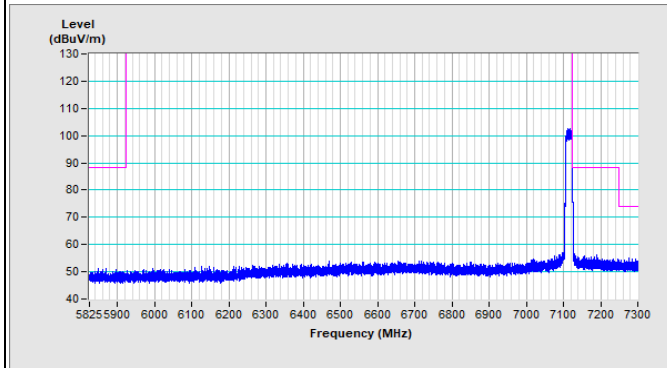


Horizontal (Peak)

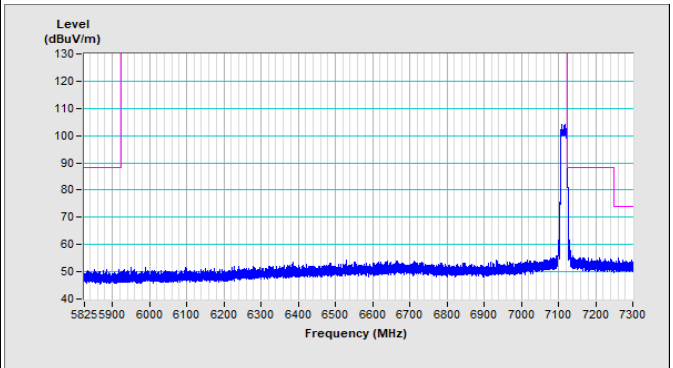


Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233

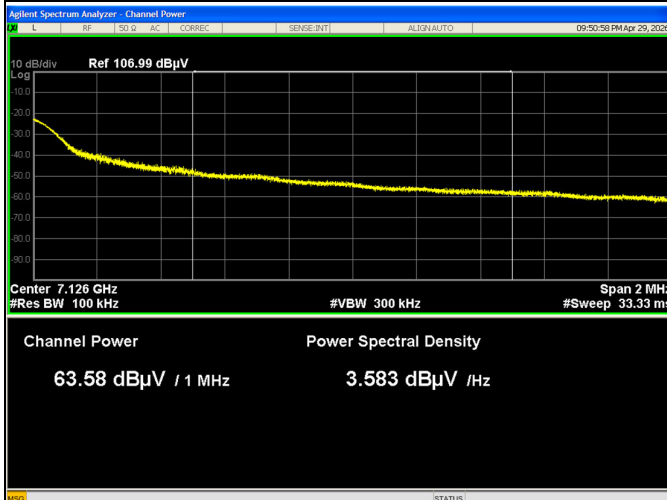


Horizontal (Average)

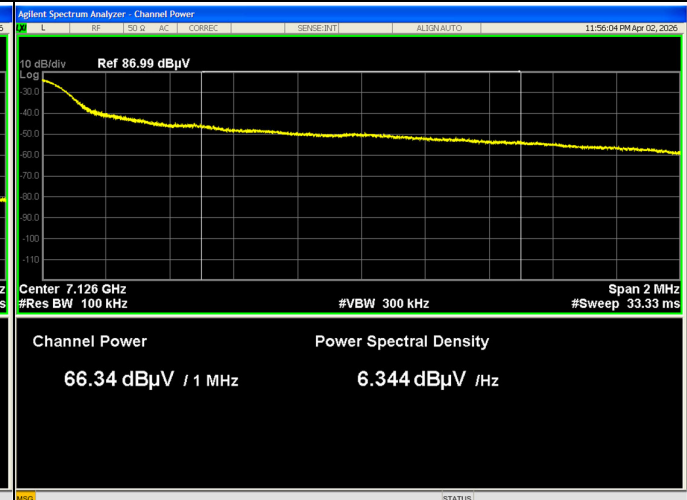


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

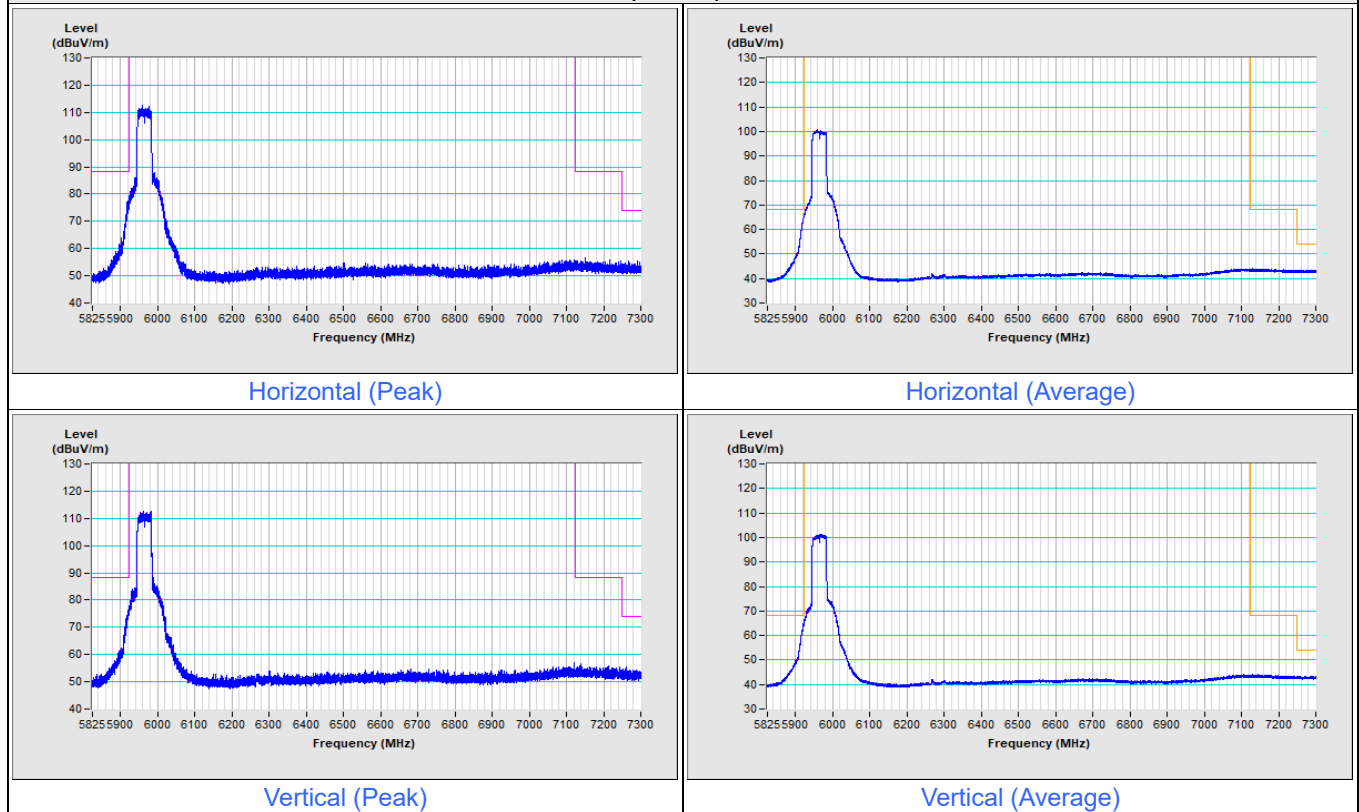


802.11be (EHT40) Channel 227

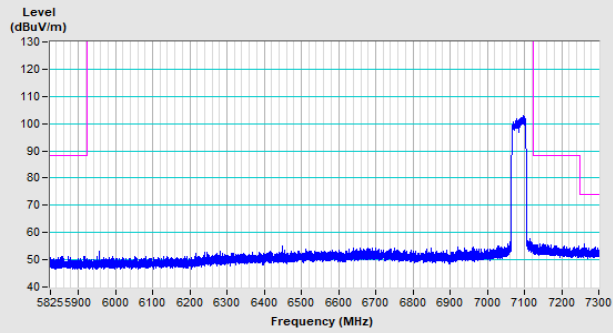


Horizontal (Peak)

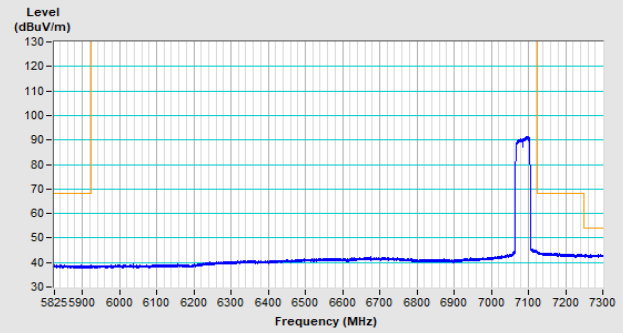

Horizontal (Average)

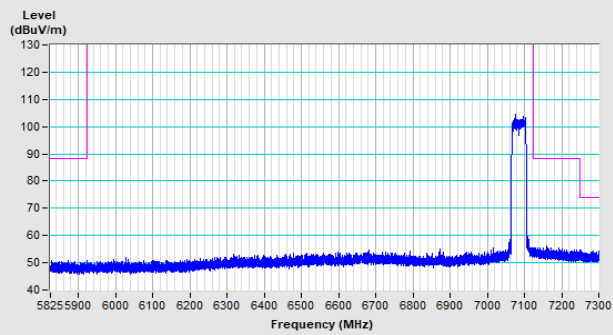


Vertical (Peak)

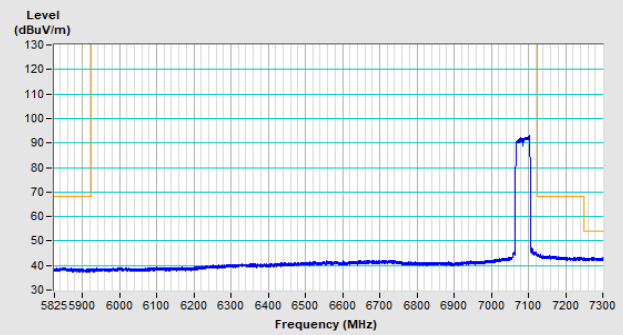


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

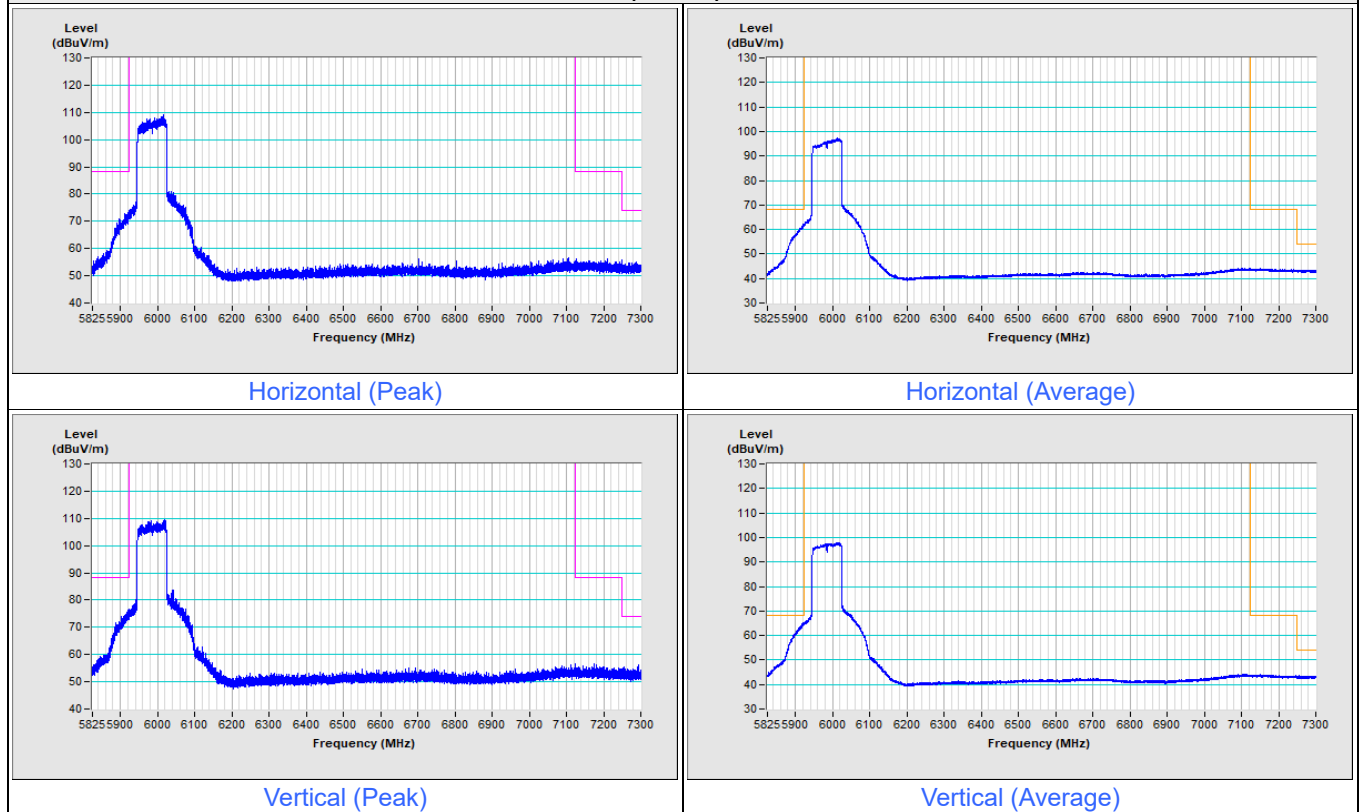


802.11be (EHT80) Channel 215

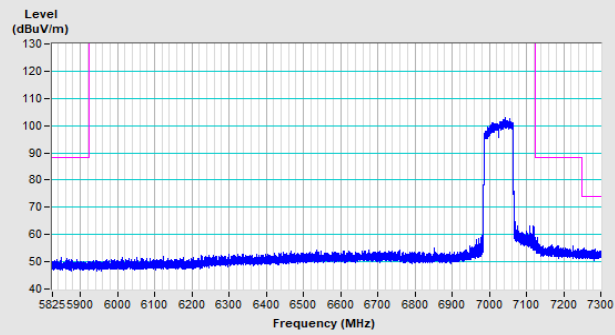


Horizontal (Peak)

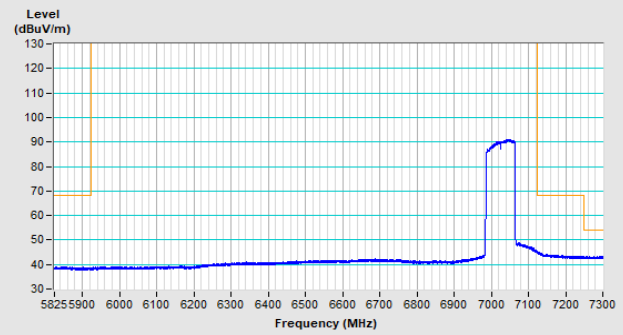

Horizontal (Average)

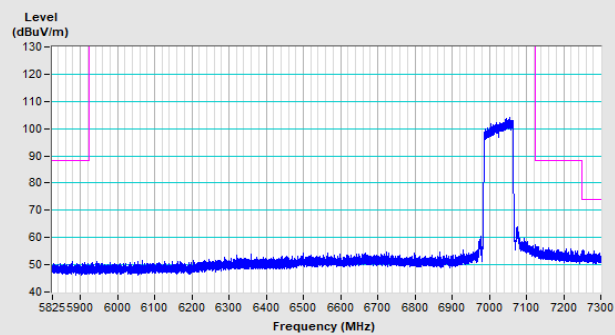


Vertical (Peak)

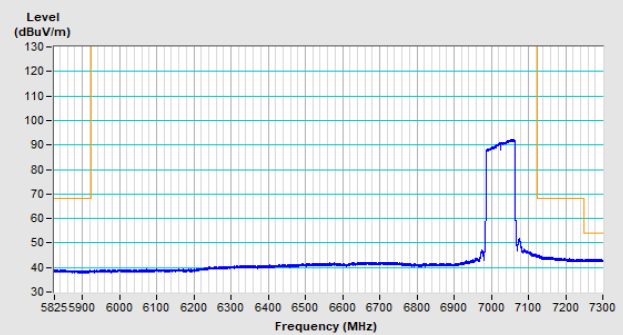


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

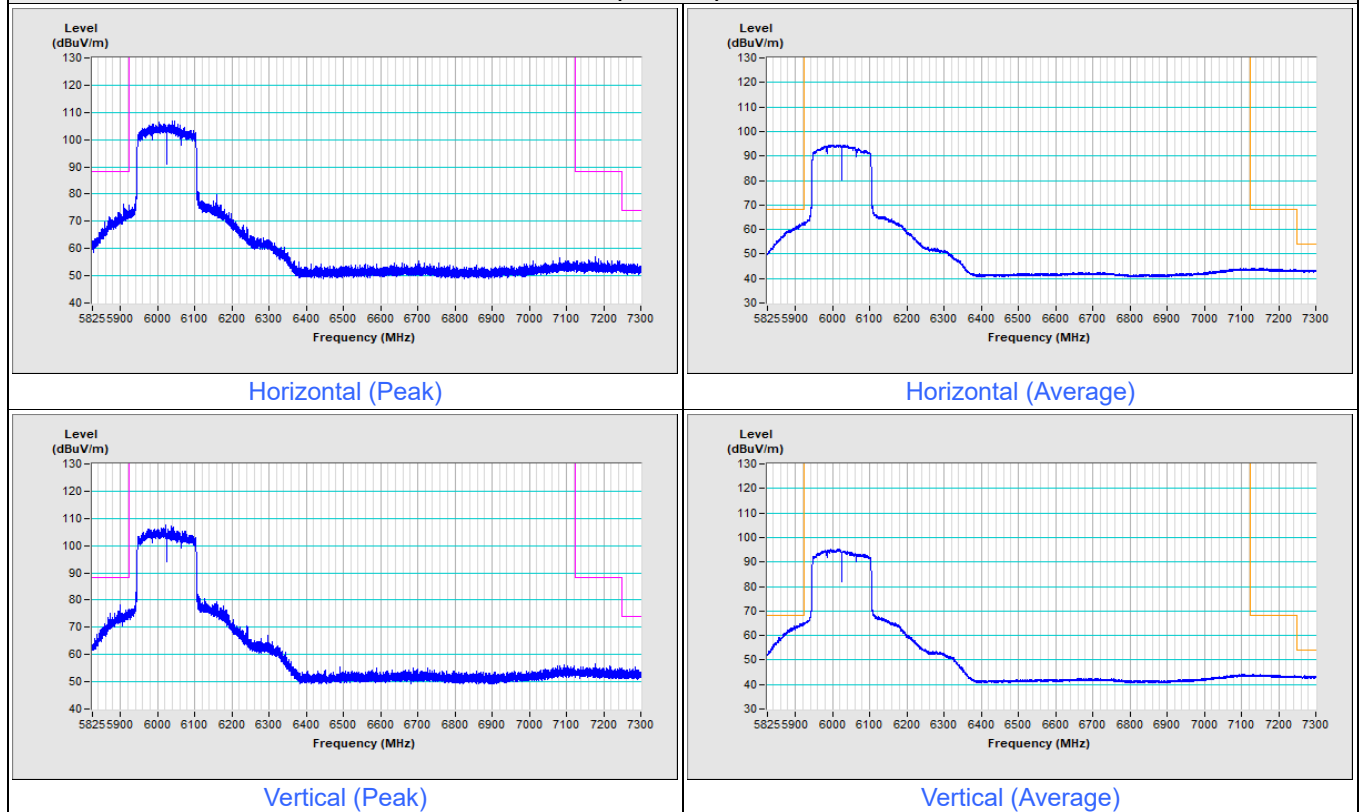


802.11be (EHT160) Channel 207

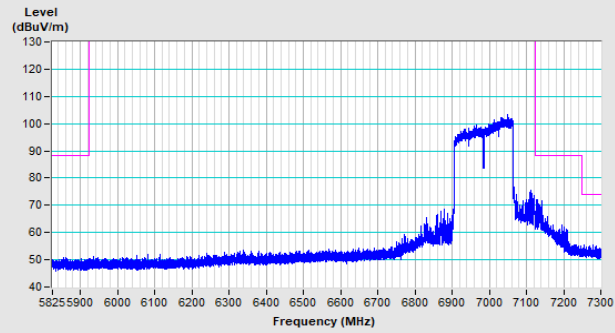


Horizontal (Peak)

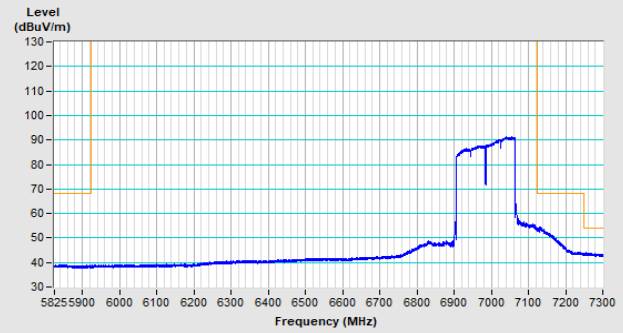

Horizontal (Average)

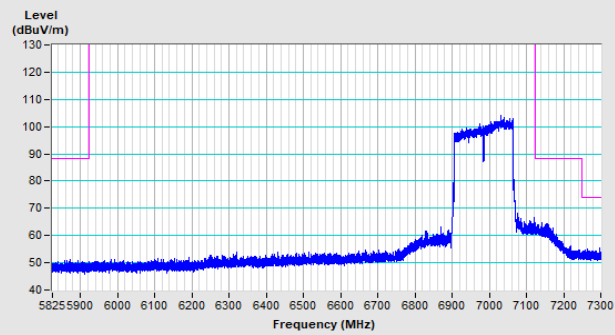


Vertical (Peak)

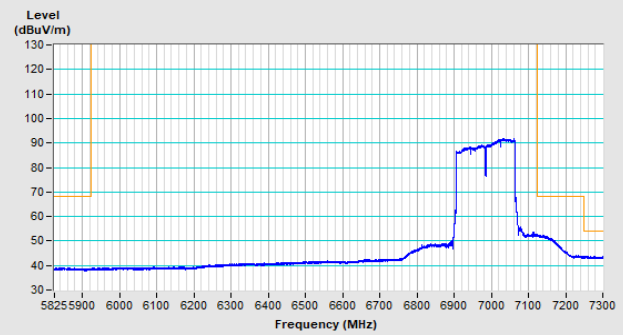


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

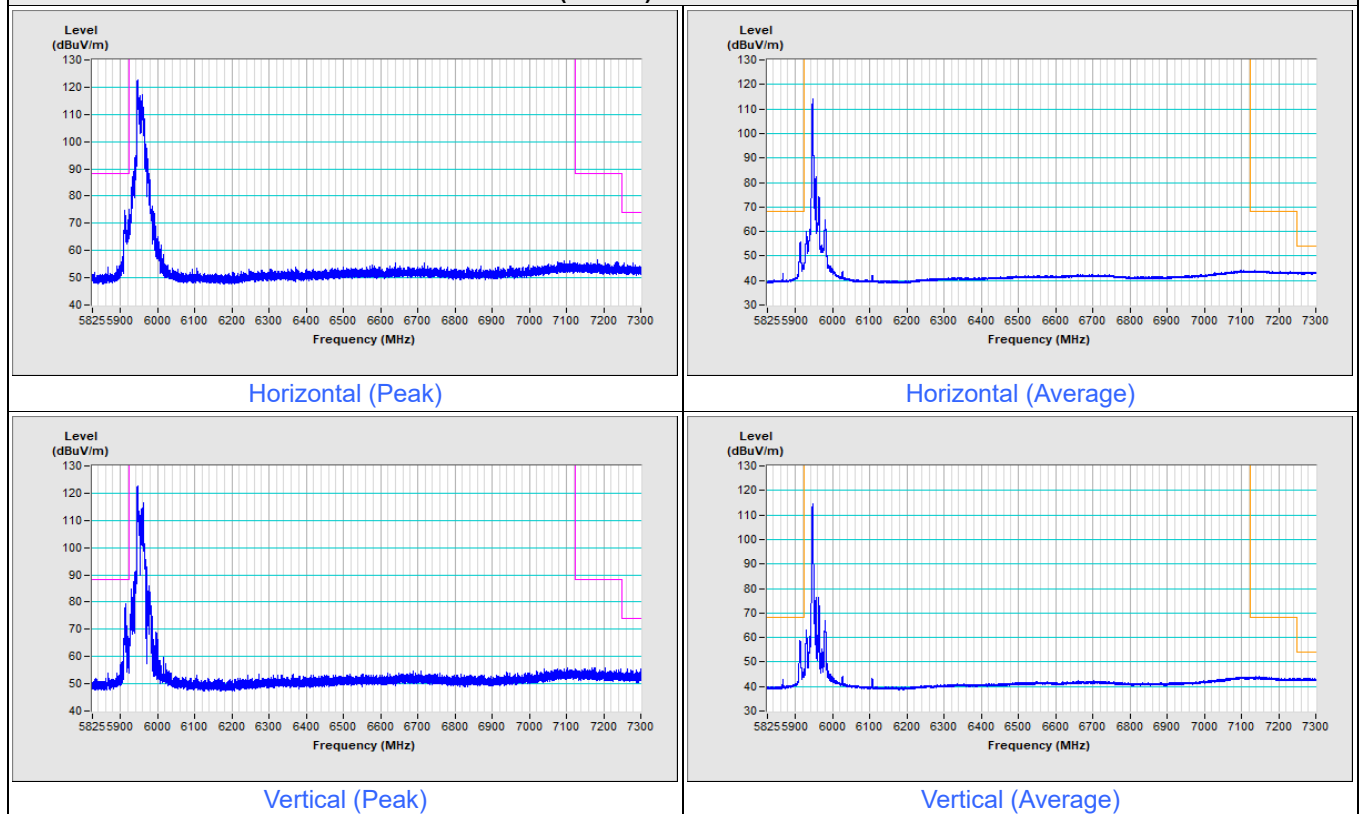

802.11be (EHT20) 26-tone RU Channel 233

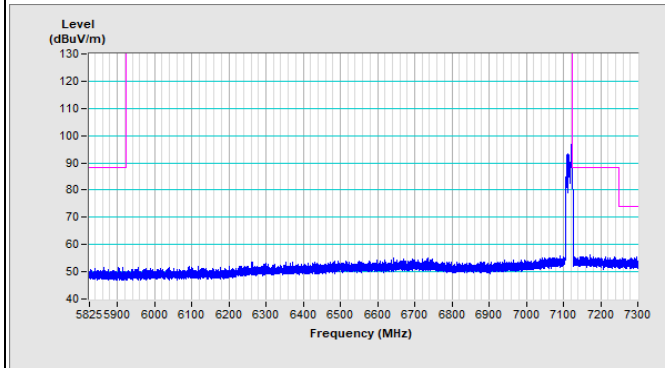

Horizontal (Peak)

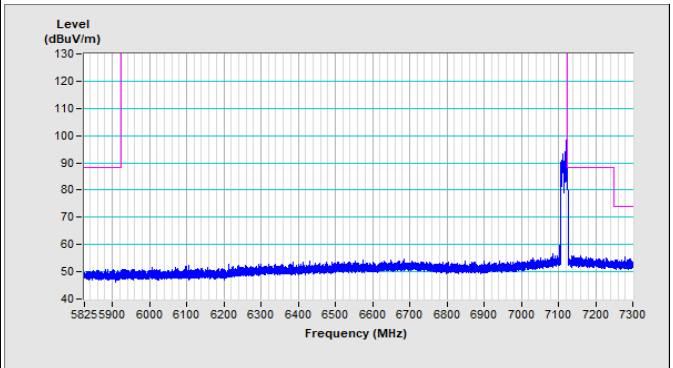


Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233




Horizontal (Average)

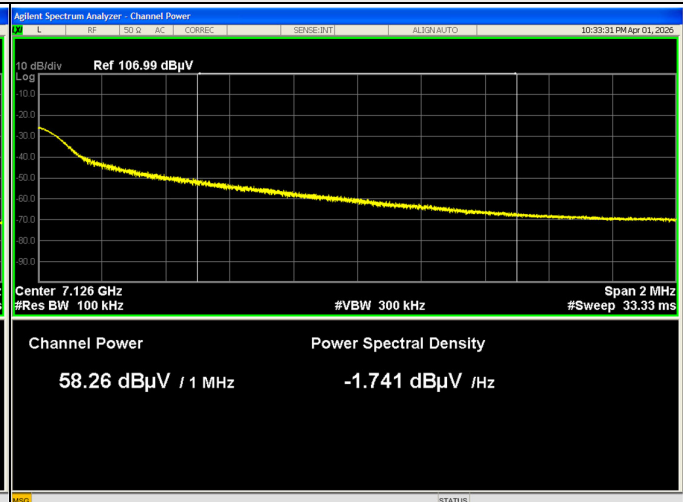


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

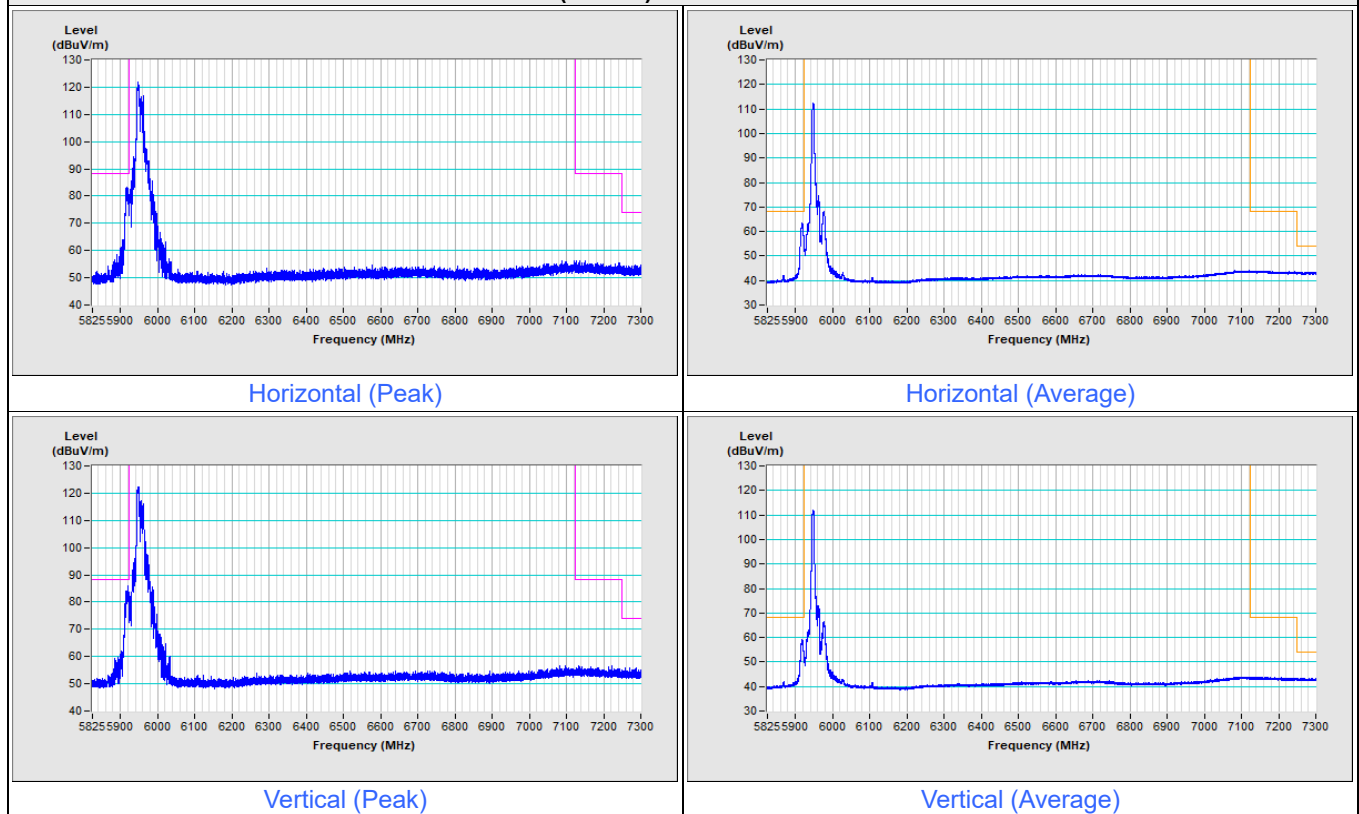

802.11be (EHT20) 52-tone RU Channel 233

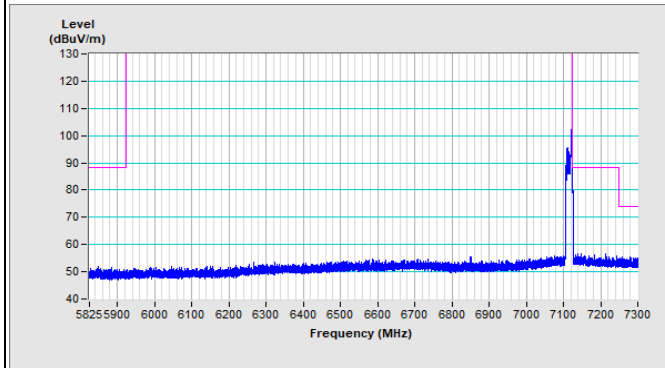

Horizontal (Peak)

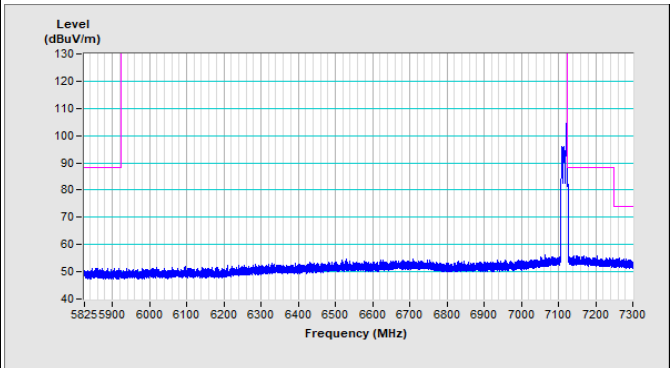


Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233




Horizontal (Average)

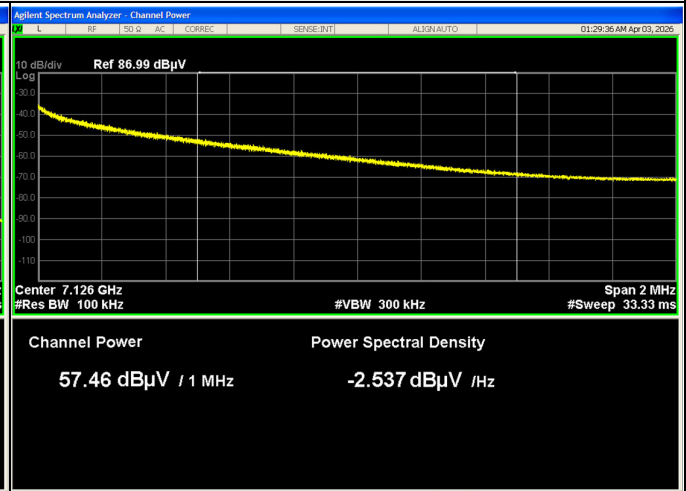


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

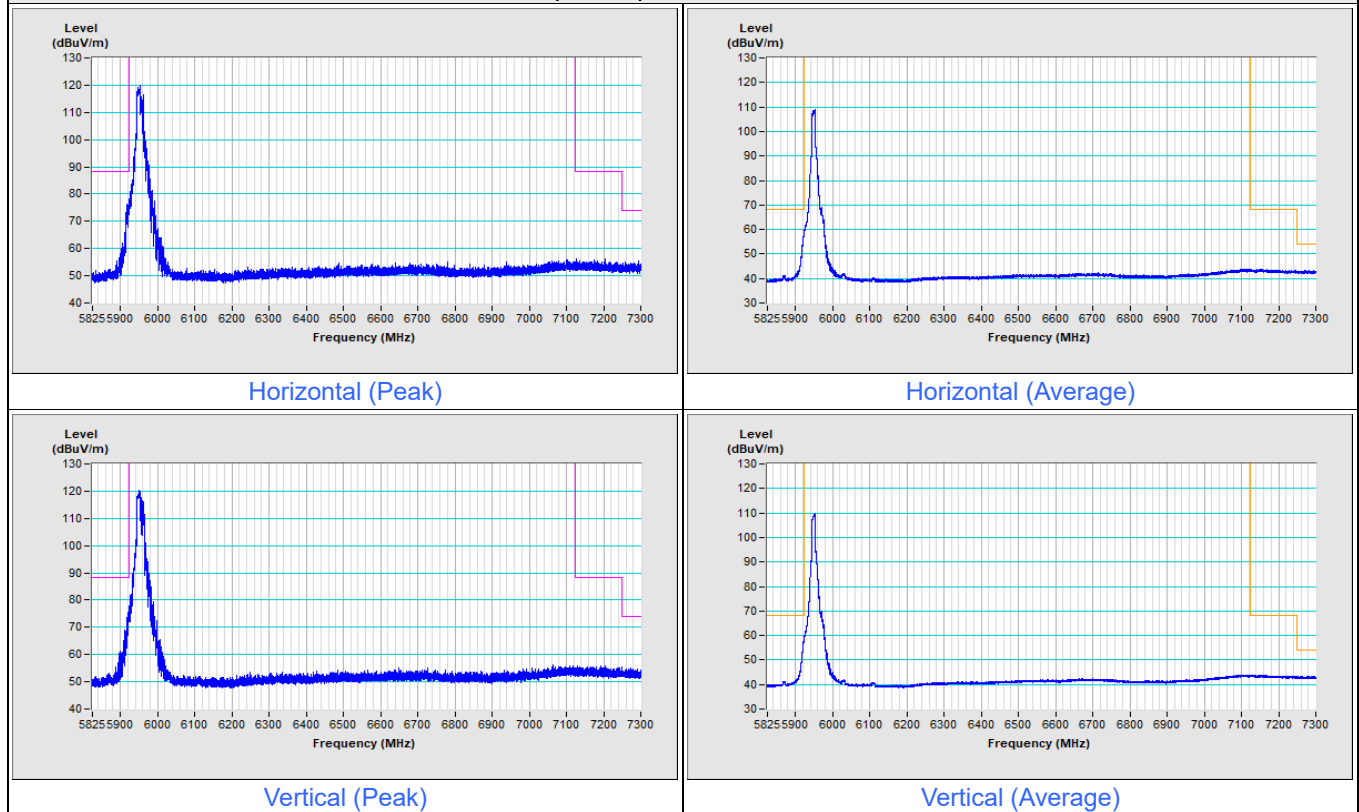

802.11be (EHT20) 106-tone RU Channel 233

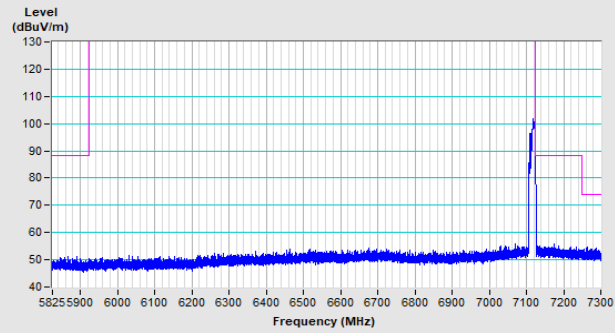


Horizontal (Peak)

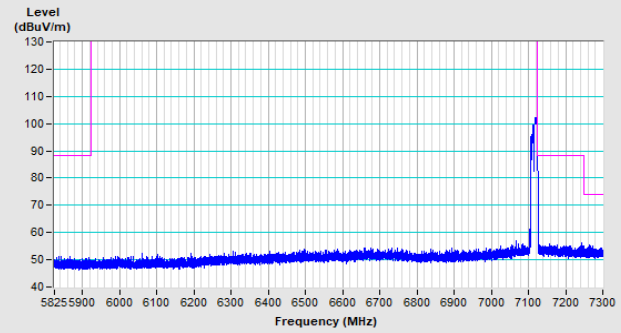

Vertical (Peak)


For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

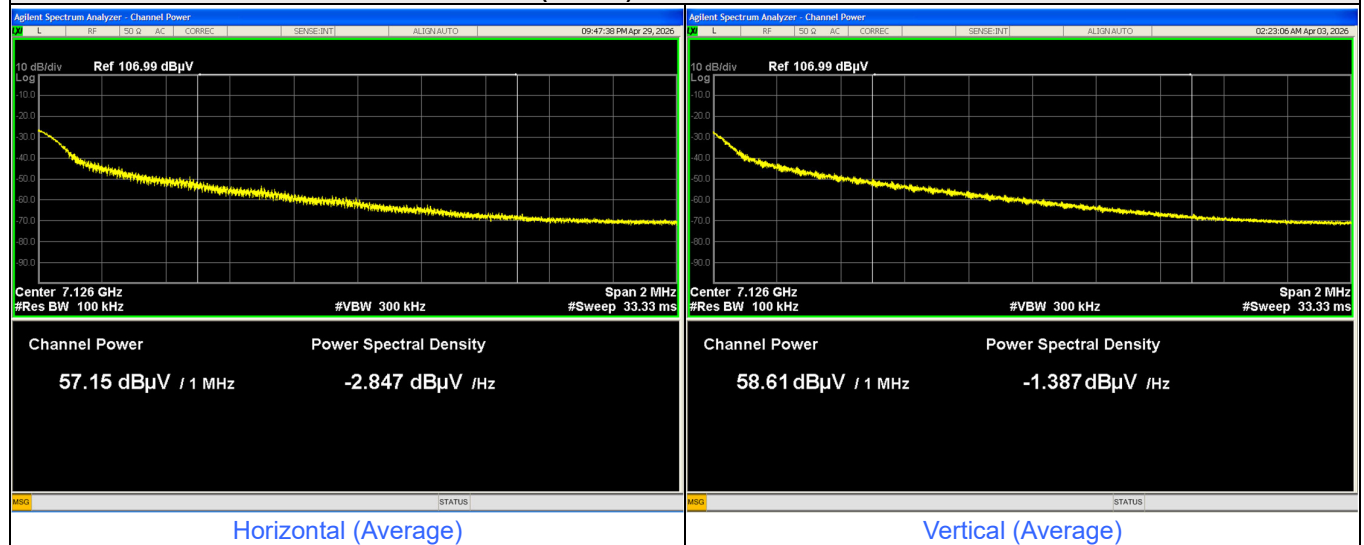


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

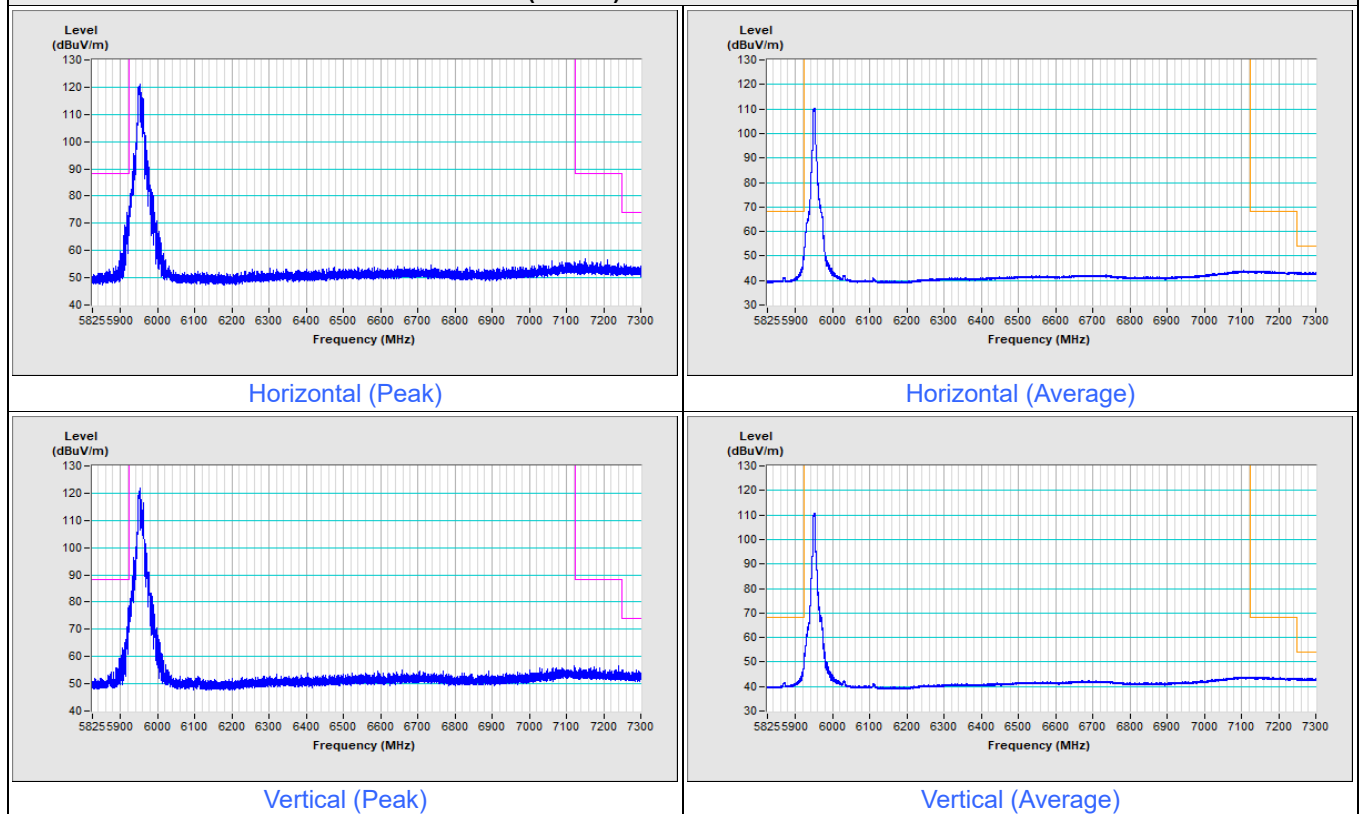


802.11be (EHT20) 52+26-tone MRU Channel 233

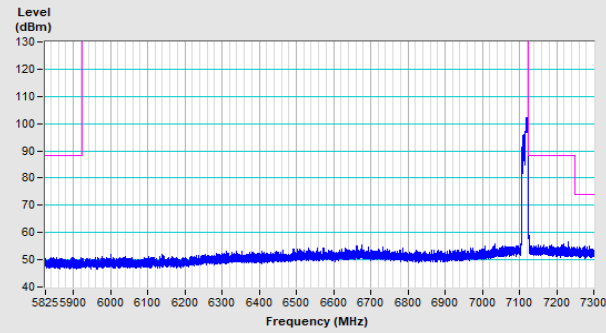


Horizontal (Peak)

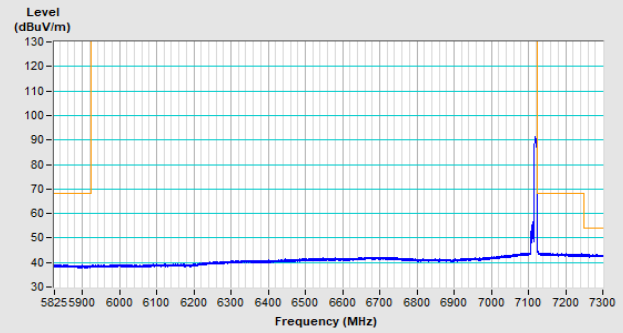

Horizontal (Average)

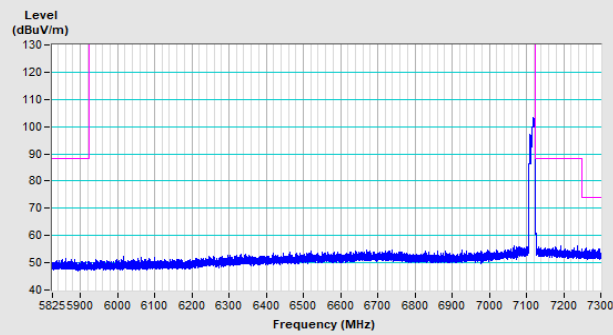


Vertical (Peak)

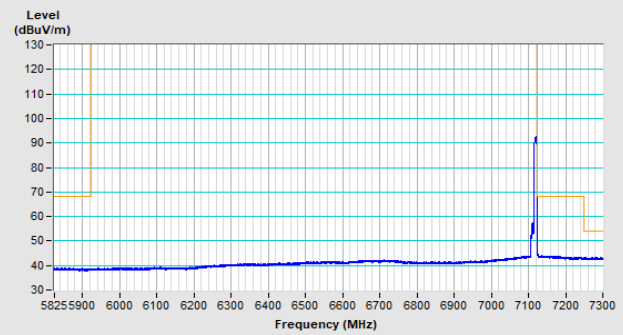

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

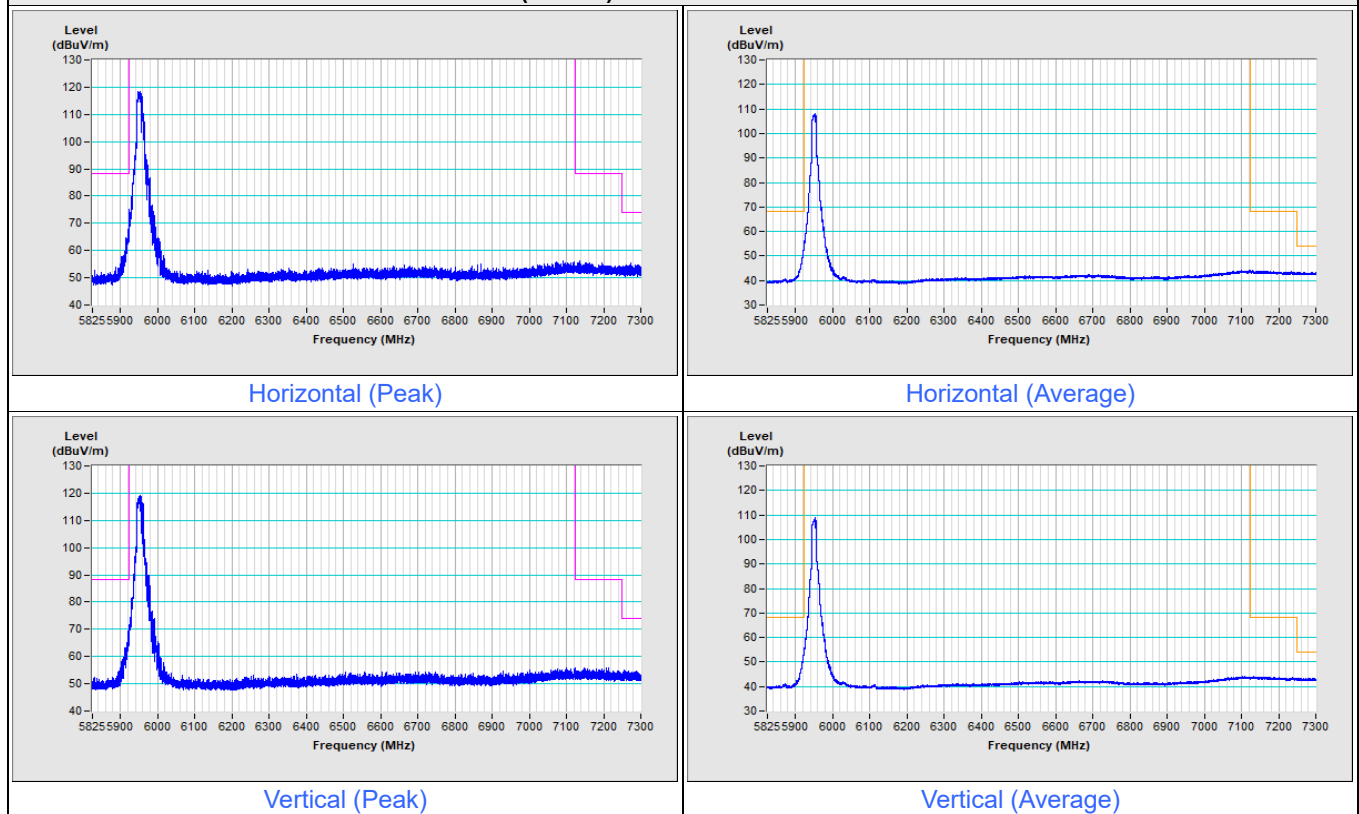


802.11be (EHT20) 106+26-tone MRU Channel 233

Level
(dBuV/m)

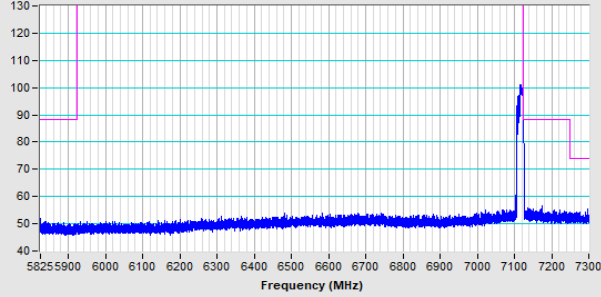

Horizontal (Peak)


Level
(dBuV/m)

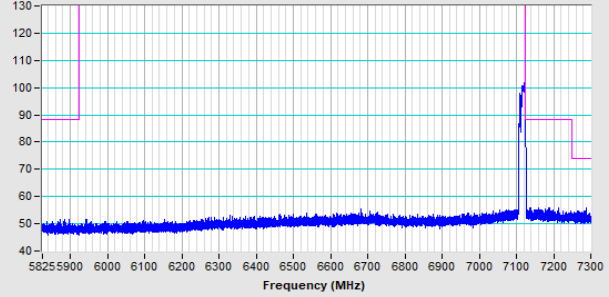

Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233

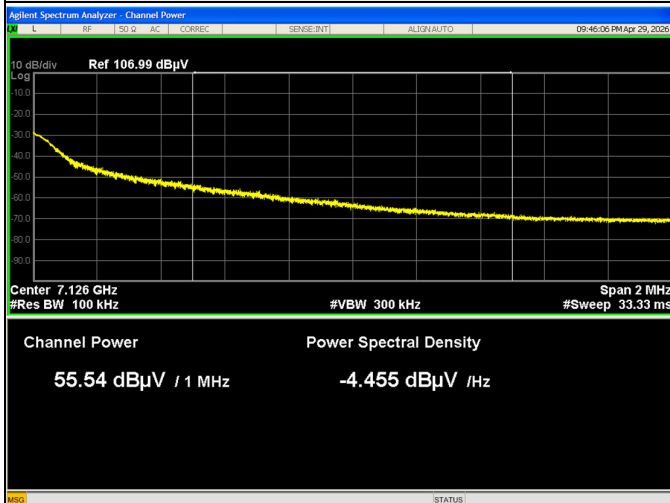


Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

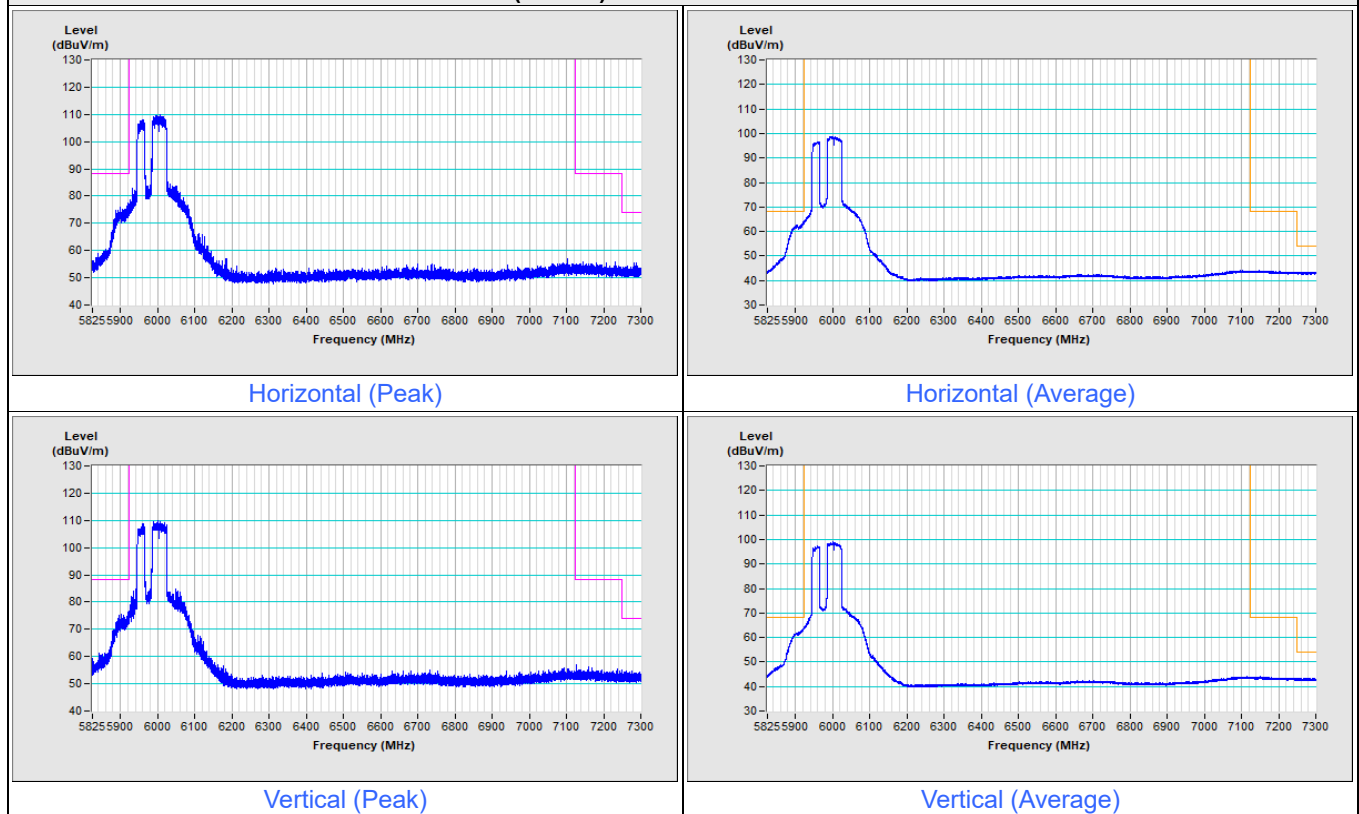


802.11be (EHT80) 484+242-tone MRU Channel 215

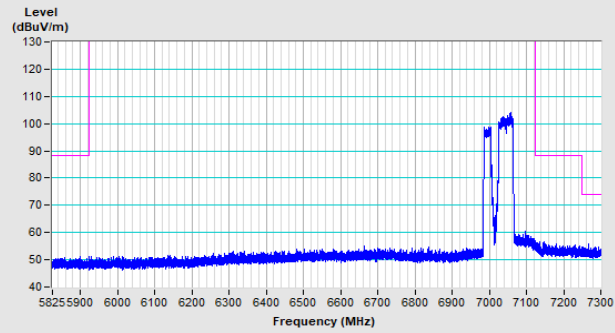


Horizontal (Peak)

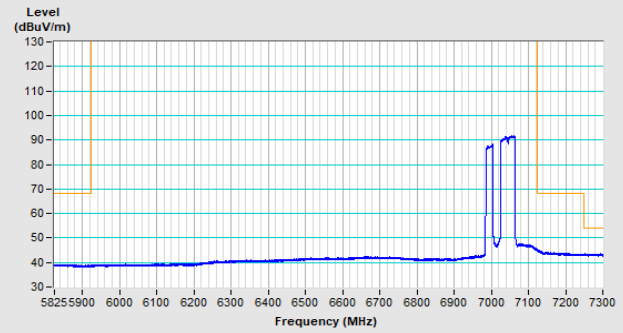

Horizontal (Average)

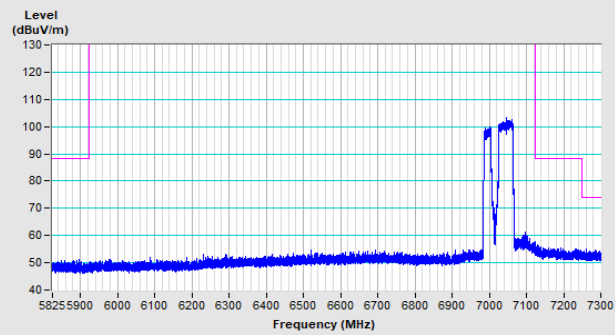


Vertical (Peak)

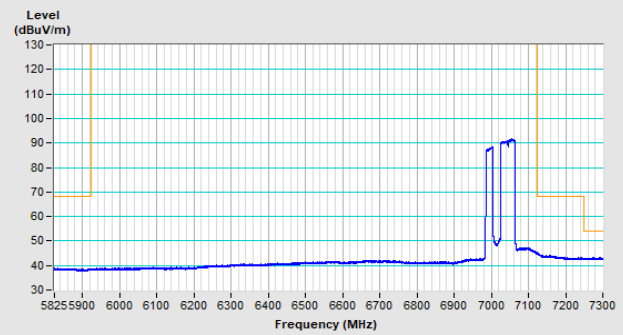


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

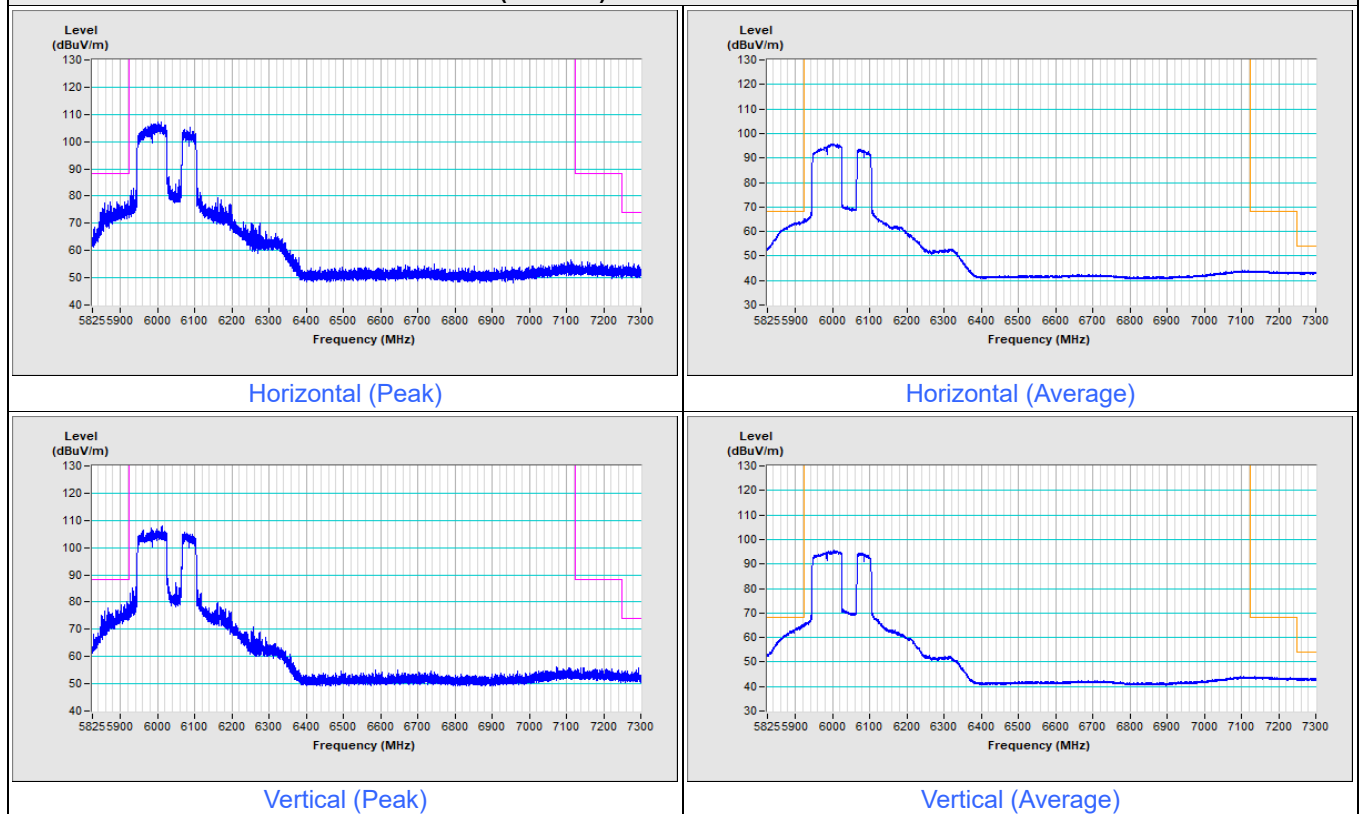


802.11be (EHT160) 996+484-tone MRU Channel 207

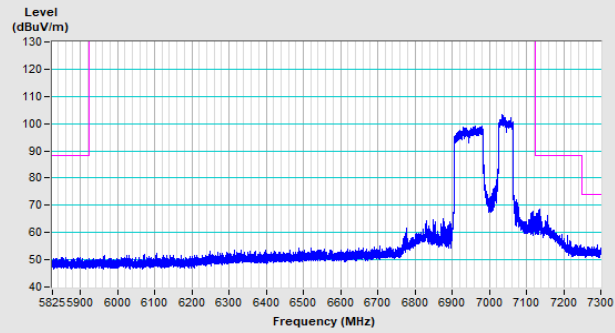


Horizontal (Peak)

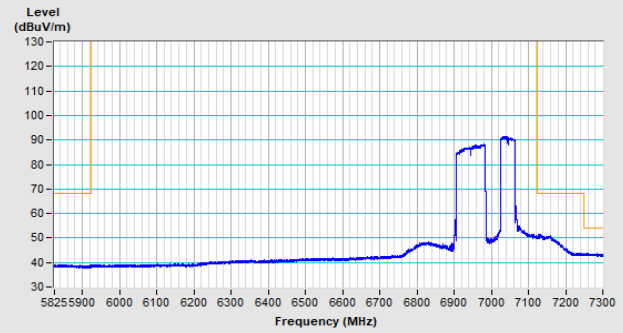

Horizontal (Average)

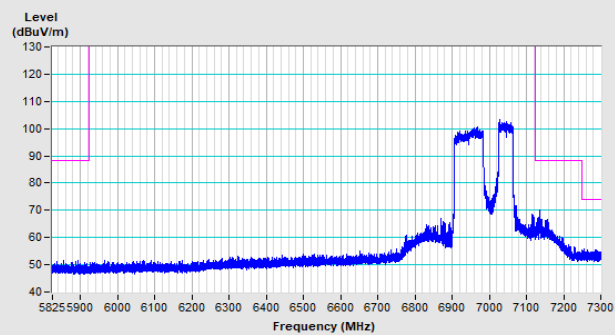


Vertical (Peak)

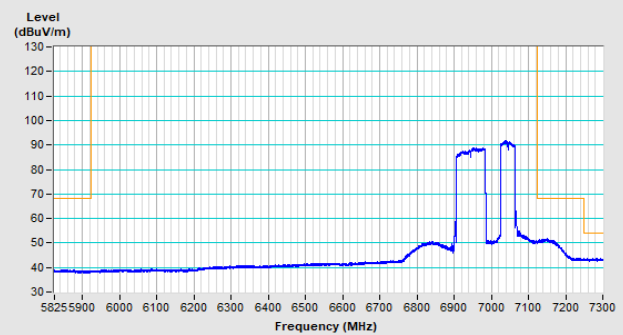


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

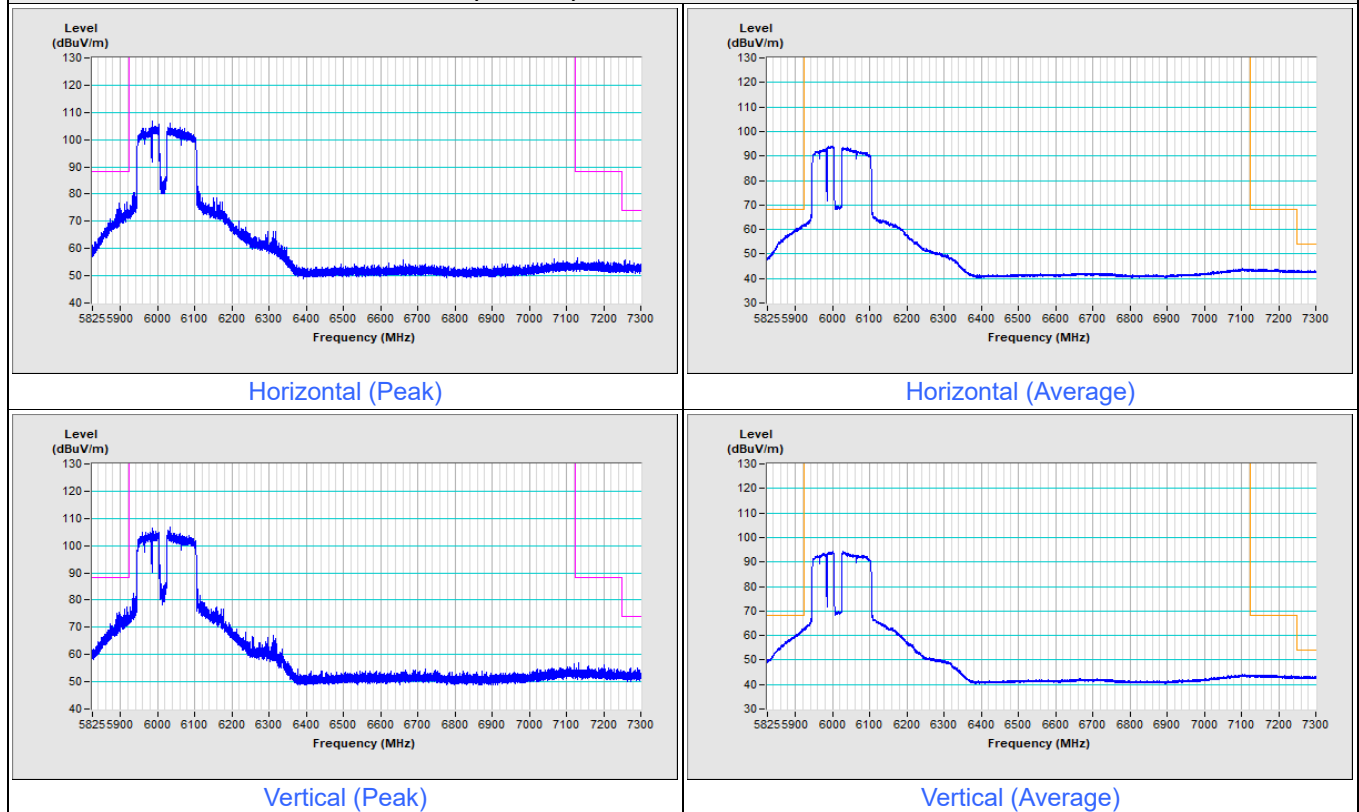


802.11be (EHT160) 996+484+242-tone MRU Channel 207

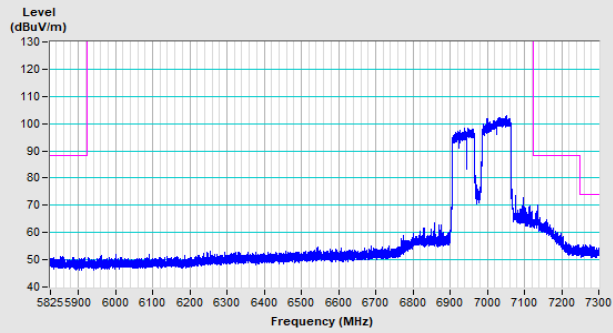


Horizontal (Peak)

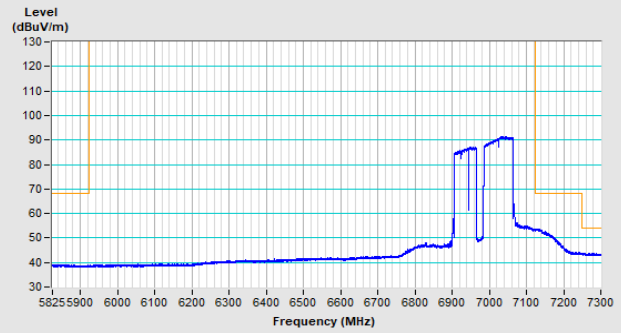

Horizontal (Average)

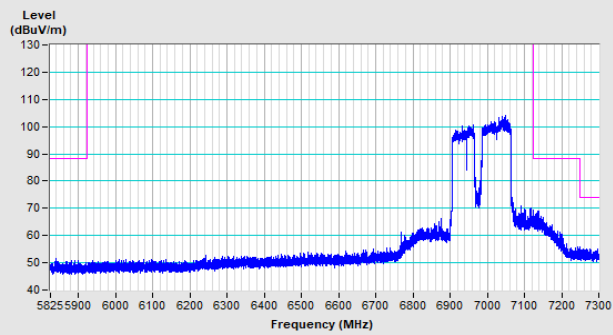

Vertical (Peak)

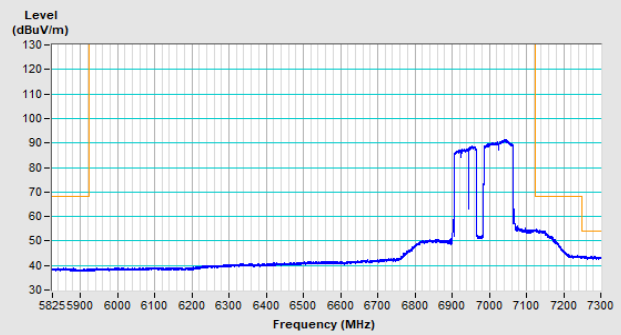

Vertical (Average)

Mode B

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.6 PK	88.2	-19.6	1.13 H	298	64.3	4.3
2	#5925.00	55.6 AV	68.2	-12.6	1.13 H	298	51.3	4.3
3	*5955.00	114.9 PK			1.13 H	298	110.4	4.5
4	*5955.00	105.4 AV			1.13 H	298	100.9	4.5
5	11910.00	50.5 PK	74.0	-23.5	3.81 H	103	38.3	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.81 H	103	26.1	12.2
7	17865.00	55.5 PK	74.0	-18.5	3.54 H	333	33.6	21.9
8	17865.00	44.3 AV	54.0	-9.7	3.54 H	333	22.4	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.5 PK	88.2	-17.7	1.05 V	281	66.2	4.3
2	#5925.00	57.5 AV	68.2	-10.7	1.05 V	281	53.2	4.3
3	*5955.00	112.0 PK			1.05 V	281	107.5	4.5
4	*5955.00	102.6 AV			1.05 V	281	98.1	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.86 V	316	41.6	12.2
6	11910.00	41.6 AV	54.0	-12.4	3.86 V	316	29.4	12.2
7	17865.00	57.9 PK	74.0	-16.1	3.22 V	170	36.0	21.9
8	17865.00	46.8 AV	54.0	-7.2	3.22 V	170	24.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.2 PK			3.52 H	255	110.4	4.8
2	*6195.00	106.1 AV			3.52 H	255	101.3	4.8
3	12390.00	50.5 PK	74.0	-23.5	3.85 H	106	38.2	12.3
4	12390.00	38.2 AV	54.0	-15.8	3.85 H	106	25.9	12.3
5	18585.00	55.8 PK	74.0	-18.2	3.49 H	338	60.8	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.49 H	338	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.6 PK			1.14 V	95	106.8	4.8
2	*6195.00	103.7 AV			1.14 V	95	98.9	4.8
3	12390.00	53.5 PK	74.0	-20.5	3.85 V	311	41.2	12.3
4	12390.00	41.5 AV	54.0	-12.5	3.85 V	311	29.2	12.3
5	18585.00	57.5 PK	74.0	-16.5	3.16 V	158	62.5	-5.0
6	18585.00	46.7 AV	54.0	-7.3	3.16 V	158	51.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			3.67 H	243	108.7	6.4
2	*6415.00	105.9 AV			3.67 H	243	99.5	6.4
3	#12830.00	50.1 PK	88.2	-38.1	3.84 H	112	37.1	13.0
4	#12830.00	37.9 AV	68.2	-30.3	3.84 H	112	24.9	13.0
5	19245.00	54.8 PK	74.0	-19.2	3.60 H	328	58.6	-3.8
6	19245.00	43.9 AV	54.0	-10.1	3.60 H	328	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.8 PK			1.13 V	104	106.4	6.4
2	*6415.00	103.7 AV			1.13 V	104	97.3	6.4
3	#12830.00	54.1 PK	88.2	-34.1	3.86 V	312	41.1	13.0
4	#12830.00	41.8 AV	68.2	-26.4	3.86 V	312	28.8	13.0
5	19245.00	58.3 PK	74.0	-15.7	3.28 V	168	62.1	-3.8
6	19245.00	47.0 AV	54.0	-7.0	3.28 V	168	50.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.4 PK			3.66 H	248	93.0	6.4
2	*6435.00	90.2 AV			3.66 H	248	83.8	6.4
3	#12870.00	50.6 PK	88.2	-37.6	3.80 H	113	37.6	13.0
4	#12870.00	38.3 AV	68.2	-29.9	3.80 H	113	25.3	13.0
5	19305.00	55.3 PK	74.0	-18.7	3.51 H	321	59.0	-3.7
6	19305.00	44.1 AV	54.0	-9.9	3.51 H	321	47.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.9 PK			1.15 V	283	92.5	6.4
2	*6435.00	89.4 AV			1.15 V	283	83.0	6.4
3	#12870.00	53.9 PK	88.2	-34.3	3.86 V	316	40.9	13.0
4	#12870.00	41.6 AV	68.2	-26.6	3.86 V	316	28.6	13.0
5	19305.00	57.2 PK	74.0	-16.8	3.19 V	155	60.9	-3.7
6	19305.00	46.3 AV	54.0	-7.7	3.19 V	155	50.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.1 PK			3.50 H	246	108.5	6.6
2	*6475.00	105.9 AV			3.50 H	246	99.3	6.6
3	#12950.00	51.1 PK	88.2	-37.1	3.85 H	103	38.0	13.1
4	#12950.00	38.7 AV	68.2	-29.5	3.85 H	103	25.6	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.55 H	341	59.2	-3.8
6	19425.00	44.4 AV	54.0	-9.6	3.55 H	341	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.7 PK			1.20 V	105	105.1	6.6
2	*6475.00	102.7 AV			1.20 V	105	96.1	6.6
3	#12950.00	53.3 PK	88.2	-34.9	3.82 V	308	40.2	13.1
4	#12950.00	41.3 AV	68.2	-26.9	3.82 V	308	28.2	13.1
5	19425.00	58.1 PK	74.0	-15.9	3.23 V	170	61.9	-3.8
6	19425.00	46.9 AV	54.0	-7.1	3.23 V	170	50.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.2 PK			3.42 H	246	93.3	6.9
2	*6515.00	90.9 AV			3.42 H	246	84.0	6.9
3	#13030.00	50.8 PK	88.2	-37.4	3.86 H	118	37.6	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.86 H	118	25.5	13.2
5	19545.00	55.0 PK	74.0	-19.0	3.48 H	306	59.1	-4.1
6	19545.00	43.9 AV	54.0	-10.1	3.48 H	306	48.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.1 PK			1.77 V	302	93.2	6.9
2	*6515.00	90.5 AV			1.77 V	302	83.6	6.9
3	#13030.00	53.8 PK	88.2	-34.4	3.87 V	325	40.6	13.2
4	#13030.00	41.8 AV	68.2	-26.4	3.87 V	325	28.6	13.2
5	19545.00	56.6 PK	74.0	-17.4	3.17 V	159	60.7	-4.1
6	19545.00	45.9 AV	54.0	-8.1	3.17 V	159	50.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			1.06 H	210	109.2	6.9
2	*6535.00	107.1 AV			1.06 H	210	100.2	6.9
3	#13070.00	50.6 PK	88.2	-37.6	3.79 H	94	37.4	13.2
4	#13070.00	38.2 AV	68.2	-30.0	3.79 H	94	25.0	13.2
5	19605.00	55.1 PK	74.0	-18.9	3.59 H	326	59.1	-4.0
6	19605.00	44.0 AV	54.0	-10.0	3.59 H	326	48.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.9 PK			1.11 V	108	107.0	6.9
2	*6535.00	103.7 AV			1.11 V	108	96.8	6.9
3	#13070.00	53.7 PK	88.2	-34.5	3.84 V	305	40.5	13.2
4	#13070.00	41.5 AV	68.2	-26.7	3.84 V	305	28.3	13.2
5	19605.00	57.3 PK	74.0	-16.7	3.20 V	156	61.3	-4.0
6	19605.00	46.4 AV	54.0	-7.6	3.20 V	156	50.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.3 PK			1.17 H	214	109.1	7.2
2	*6695.00	106.2 AV			1.17 H	214	99.0	7.2
3	13390.00	51.1 PK	74.0	-22.9	3.76 H	98	37.1	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.76 H	98	24.6	14.0
5	20085.00	55.7 PK	74.0	-18.3	3.53 H	331	59.2	-3.5
6	20085.00	44.3 AV	54.0	-9.7	3.53 H	331	47.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.6 PK			1.12 V	90	106.4	7.2
2	*6695.00	103.1 AV			1.12 V	90	95.9	7.2
3	13390.00	53.7 PK	74.0	-20.3	3.86 V	310	39.7	14.0
4	13390.00	41.4 AV	54.0	-12.6	3.86 V	310	27.4	14.0
5	20085.00	58.3 PK	74.0	-15.7	3.27 V	158	61.8	-3.5
6	20085.00	47.1 AV	54.0	-6.9	3.27 V	158	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.2 PK			1.30 H	56	108.0	7.2
2	*6855.00	104.8 AV			1.30 H	56	97.6	7.2
3	#13710.00	50.6 PK	88.2	-37.6	3.77 H	113	35.4	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.77 H	113	23.4	15.2
5	20565.00	55.7 PK	74.0	-18.3	3.55 H	347	59.0	-3.3
6	20565.00	44.3 AV	54.0	-9.7	3.55 H	347	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.0 PK			1.20 V	101	104.8	7.2
2	*6855.00	100.9 AV			1.20 V	101	93.7	7.2
3	#13710.00	54.2 PK	88.2	-34.0	3.84 V	300	39.0	15.2
4	#13710.00	42.0 AV	68.2	-26.2	3.84 V	300	26.8	15.2
5	20565.00	57.9 PK	74.0	-16.1	3.16 V	174	61.2	-3.3
6	20565.00	46.7 AV	54.0	-7.3	3.16 V	174	50.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.5 PK			1.16 H	196	92.3	7.2
2	*6875.00	90.2 AV			1.16 H	196	83.0	7.2
3	#13750.00	50.6 PK	88.2	-37.6	3.82 H	110	35.5	15.1
4	#13750.00	38.5 AV	68.2	-29.7	3.82 H	110	23.4	15.1
5	20625.00	55.7 PK	74.0	-18.3	3.53 H	322	59.0	-3.3
6	20625.00	44.6 AV	54.0	-9.4	3.53 H	322	47.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.1 PK			1.00 V	296	91.9	7.2
2	*6875.00	90.0 AV			1.00 V	296	82.8	7.2
3	#13750.00	54.4 PK	88.2	-33.8	3.83 V	309	39.3	15.1
4	#13750.00	41.9 AV	68.2	-26.3	3.83 V	309	26.8	15.1
5	20625.00	57.1 PK	74.0	-16.9	3.22 V	151	60.4	-3.3
6	20625.00	46.3 AV	54.0	-7.7	3.22 V	151	49.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.5 PK			1.11 H	198	91.5	8.0
2	*6995.00	90.3 AV			1.11 H	198	82.3	8.0
3	#13990.00	50.3 PK	88.2	-37.9	3.83 H	102	34.7	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.83 H	102	22.6	15.6
5	20985.00	55.3 PK	74.0	-18.7	3.53 H	311	58.1	-2.8
6	20985.00	43.9 AV	54.0	-10.1	3.53 H	311	46.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.9 PK			1.04 V	316	90.9	8.0
2	*6995.00	89.5 AV			1.04 V	316	81.5	8.0
3	#13990.00	53.8 PK	88.2	-34.4	3.83 V	315	38.2	15.6
4	#13990.00	41.3 AV	68.2	-26.9	3.83 V	315	25.7	15.6
5	20985.00	57.8 PK	74.0	-16.2	3.24 V	150	60.6	-2.8
6	20985.00	46.7 AV	54.0	-7.3	3.24 V	150	49.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			1.17 H	197	90.4	9.5
2	*7115.00	90.6 AV			1.17 H	197	81.1	9.5
3	#7125.00	78.6 PK	88.2	-9.6	1.17 H	197	69.2	9.4
4	#7125.00	65.2 AV	68.2	-3.0	1.17 H	197	55.8	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.17 H	197	46.4	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.17 H	197	34.9	8.7
7	#14230.00	50.8 PK	88.2	-37.4	3.74 H	120	35.5	15.3
8	#14230.00	38.7 AV	68.2	-29.5	3.74 H	120	23.4	15.3
9	21345.00	55.3 PK	74.0	-18.7	3.53 H	331	56.9	-1.6
10	21345.00	43.9 AV	54.0	-10.1	3.53 H	331	45.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			1.02 V	301	90.4	9.5
2	*7115.00	90.5 AV			1.02 V	301	81.0	9.5
3	#7125.00	73.2 PK	88.2	-15.0	1.02 V	301	63.8	9.4
4	#7125.00	60.4 AV	68.2	-7.8	1.02 V	301	51.0	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.02 V	301	46.0	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.02 V	301	34.8	8.7
7	#14230.00	53.2 PK	88.2	-35.0	3.83 V	322	37.9	15.3
8	#14230.00	41.2 AV	68.2	-27.0	3.83 V	322	25.9	15.3
9	21345.00	57.4 PK	74.0	-16.6	3.22 V	155	59.0	-1.6
10	21345.00	46.7 AV	54.0	-7.3	3.22 V	155	48.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1Tx NSS1

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.7 PK	88.2	-18.5	1.00 H	0	65.4	4.3
2	#5925.00	58.3 AV	68.2	-9.9	1.00 H	0	54.0	4.3
3	*5955.00	116.1 PK			1.13 H	299	111.6	4.5
4	*5955.00	104.9 AV			1.13 H	299	100.4	4.5
5	11910.00	51.1 PK	74.0	-22.9	3.81 H	100	38.9	12.2
6	11910.00	38.6 AV	54.0	-15.4	3.81 H	100	26.4	12.2
7	17865.00	55.1 PK	74.0	-18.9	3.54 H	326	33.2	21.9
8	17865.00	44.0 AV	54.0	-10.0	3.54 H	326	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.0 PK	88.2	-16.2	1.07 V	287	67.7	4.3
2	#5925.00	58.7 AV	68.2	-9.5	1.07 V	287	54.4	4.3
3	*5955.00	113.0 PK			1.07 V	287	108.5	4.5
4	*5955.00	101.7 AV			1.07 V	287	97.2	4.5
5	11910.00	53.7 PK	74.0	-20.3	3.84 V	323	41.5	12.2
6	11910.00	41.5 AV	54.0	-12.5	3.84 V	323	29.3	12.2
7	17865.00	57.8 PK	74.0	-16.2	3.22 V	169	35.9	21.9
8	17865.00	46.7 AV	54.0	-7.3	3.22 V	169	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.5 PK			3.33 H	246	111.7	4.8
2	*6195.00	105.1 AV			3.33 H	246	100.3	4.8
3	12390.00	50.2 PK	74.0	-23.8	3.76 H	90	37.9	12.3
4	12390.00	38.0 AV	54.0	-16.0	3.76 H	90	25.7	12.3
5	18585.00	55.8 PK	74.0	-18.2	3.51 H	317	60.8	-5.0
6	18585.00	44.7 AV	54.0	-9.3	3.51 H	317	49.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.7 PK			1.17 V	99	109.9	4.8
2	*6195.00	104.4 AV			1.17 V	99	99.6	4.8
3	12390.00	54.4 PK	74.0	-19.6	3.84 V	314	42.1	12.3
4	12390.00	42.0 AV	54.0	-12.0	3.84 V	314	29.7	12.3
5	18585.00	58.1 PK	74.0	-15.9	3.23 V	158	63.1	-5.0
6	18585.00	47.2 AV	54.0	-6.8	3.23 V	158	52.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			1.06 H	211	110.8	6.4
2	*6415.00	105.6 AV			1.06 H	211	99.2	6.4
3	#12830.00	50.4 PK	88.2	-37.8	3.77 H	109	37.4	13.0
4	#12830.00	38.5 AV	68.2	-29.7	3.77 H	109	25.5	13.0
5	19245.00	55.7 PK	74.0	-18.3	3.59 H	331	59.5	-3.8
6	19245.00	44.7 AV	54.0	-9.3	3.59 H	331	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.3 PK			1.21 V	109	107.9	6.4
2	*6415.00	103.0 AV			1.21 V	109	96.6	6.4
3	#12830.00	54.0 PK	88.2	-34.2	3.90 V	329	41.0	13.0
4	#12830.00	41.7 AV	68.2	-26.5	3.90 V	329	28.7	13.0
5	19245.00	57.9 PK	74.0	-16.1	3.24 V	159	61.7	-3.8
6	19245.00	46.7 AV	54.0	-7.3	3.24 V	159	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			3.64 H	247	95.1	6.4
2	*6435.00	89.9 AV			3.64 H	247	83.5	6.4
3	#12870.00	50.7 PK	88.2	-37.5	3.81 H	111	37.7	13.0
4	#12870.00	38.3 AV	68.2	-29.9	3.81 H	111	25.3	13.0
5	19305.00	55.6 PK	74.0	-18.4	3.57 H	320	59.3	-3.7
6	19305.00	44.4 AV	54.0	-9.6	3.57 H	320	48.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.2 PK			1.31 V	308	94.8	6.4
2	*6435.00	89.4 AV			1.31 V	308	83.0	6.4
3	#12870.00	54.4 PK	88.2	-33.8	3.91 V	309	41.4	13.0
4	#12870.00	42.0 AV	68.2	-26.2	3.91 V	309	29.0	13.0
5	19305.00	56.9 PK	74.0	-17.1	3.19 V	167	60.6	-3.7
6	19305.00	46.0 AV	54.0	-8.0	3.19 V	167	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.1 PK			1.11 H	210	110.5	6.6
2	*6475.00	105.8 AV			1.11 H	210	99.2	6.6
3	#12950.00	50.7 PK	88.2	-37.5	3.76 H	105	37.6	13.1
4	#12950.00	38.5 AV	68.2	-29.7	3.76 H	105	25.4	13.1
5	19425.00	55.6 PK	74.0	-18.4	3.56 H	336	59.4	-3.8
6	19425.00	44.2 AV	54.0	-9.8	3.56 H	336	48.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.5 PK			1.15 V	109	107.9	6.6
2	*6475.00	104.2 AV			1.15 V	109	97.6	6.6
3	#12950.00	54.0 PK	88.2	-34.2	3.81 V	325	40.9	13.1
4	#12950.00	41.7 AV	68.2	-26.5	3.81 V	325	28.6	13.1
5	19425.00	57.5 PK	74.0	-16.5	3.18 V	161	61.3	-3.8
6	19425.00	46.6 AV	54.0	-7.4	3.18 V	161	50.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.7 PK			3.41 H	249	95.8	6.9
2	*6515.00	90.4 AV			3.41 H	249	83.5	6.9
3	#13030.00	50.4 PK	88.2	-37.8	3.74 H	98	37.2	13.2
4	#13030.00	38.3 AV	68.2	-29.9	3.74 H	98	25.1	13.2
5	19545.00	54.9 PK	74.0	-19.1	3.50 H	328	59.0	-4.1
6	19545.00	44.0 AV	54.0	-10.0	3.50 H	328	48.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.7 PK			1.32 V	294	93.8	6.9
2	*6515.00	88.9 AV			1.32 V	294	82.0	6.9
3	#13030.00	53.5 PK	88.2	-34.7	3.83 V	309	40.3	13.2
4	#13030.00	41.2 AV	68.2	-27.0	3.83 V	309	28.0	13.2
5	19545.00	57.2 PK	74.0	-16.8	3.14 V	168	61.3	-4.1
6	19545.00	46.3 AV	54.0	-7.7	3.14 V	168	50.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.07 H	210	110.7	6.9
2	*6535.00	106.1 AV			1.07 H	210	99.2	6.9
3	#13070.00	50.0 PK	88.2	-38.2	3.81 H	110	36.8	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.81 H	110	24.7	13.2
5	19605.00	56.0 PK	74.0	-18.0	3.54 H	330	60.0	-4.0
6	19605.00	44.7 AV	54.0	-9.3	3.54 H	330	48.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.7 PK			1.19 V	89	107.8	6.9
2	*6535.00	104.2 AV			1.19 V	89	97.3	6.9
3	#13070.00	53.6 PK	88.2	-34.6	3.84 V	329	40.4	13.2
4	#13070.00	41.1 AV	68.2	-27.1	3.84 V	329	27.9	13.2
5	19605.00	57.7 PK	74.0	-16.3	3.20 V	179	61.7	-4.0
6	19605.00	46.5 AV	54.0	-7.5	3.20 V	179	50.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.6 PK			1.17 H	215	108.4	7.2
2	*6695.00	104.7 AV			1.17 H	215	97.5	7.2
3	13390.00	50.4 PK	74.0	-23.6	3.85 H	117	36.4	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.85 H	117	24.0	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.55 H	321	58.8	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.55 H	321	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.1 PK			1.15 V	100	107.9	7.2
2	*6695.00	104.5 AV			1.15 V	100	97.3	7.2
3	13390.00	54.0 PK	74.0	-20.0	3.82 V	309	40.0	14.0
4	13390.00	41.8 AV	54.0	-12.2	3.82 V	309	27.8	14.0
5	20085.00	58.4 PK	74.0	-15.6	3.20 V	180	61.9	-3.5
6	20085.00	47.0 AV	54.0	-7.0	3.20 V	180	50.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.2 PK			1.06 H	201	110.0	7.2
2	*6855.00	106.7 AV			1.06 H	201	99.5	7.2
3	#13710.00	50.2 PK	88.2	-38.0	3.81 H	91	35.0	15.2
4	#13710.00	38.2 AV	68.2	-30.0	3.81 H	91	23.0	15.2
5	20565.00	55.8 PK	74.0	-18.2	3.57 H	321	59.1	-3.3
6	20565.00	44.3 AV	54.0	-9.7	3.57 H	321	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.9 PK			1.17 V	94	107.7	7.2
2	*6855.00	104.4 AV			1.17 V	94	97.2	7.2
3	#13710.00	54.0 PK	88.2	-34.2	3.82 V	318	38.8	15.2
4	#13710.00	41.7 AV	68.2	-26.5	3.82 V	318	26.5	15.2
5	20565.00	57.7 PK	74.0	-16.3	3.18 V	167	61.0	-3.3
6	20565.00	46.6 AV	54.0	-7.4	3.18 V	167	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			1.15 H	196	95.6	7.2
2	*6875.00	90.5 AV			1.15 H	196	83.3	7.2
3	#13750.00	50.4 PK	88.2	-37.8	3.85 H	114	35.3	15.1
4	#13750.00	38.4 AV	68.2	-29.8	3.85 H	114	23.3	15.1
5	20625.00	55.4 PK	74.0	-18.6	3.53 H	332	58.7	-3.3
6	20625.00	44.1 AV	54.0	-9.9	3.53 H	332	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.4 PK			1.35 V	319	94.2	7.2
2	*6875.00	89.4 AV			1.35 V	319	82.2	7.2
3	#13750.00	54.3 PK	88.2	-33.9	3.86 V	311	39.2	15.1
4	#13750.00	41.7 AV	68.2	-26.5	3.86 V	311	26.6	15.1
5	20625.00	57.5 PK	74.0	-16.5	3.24 V	158	60.8	-3.3
6	20625.00	46.4 AV	54.0	-7.6	3.24 V	158	49.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.0 PK			1.20 H	16	94.0	8.0
2	*6995.00	90.6 AV			1.20 H	16	82.6	8.0
3	#13990.00	51.0 PK	88.2	-37.2	3.84 H	104	35.4	15.6
4	#13990.00	38.6 AV	68.2	-29.6	3.84 H	104	23.0	15.6
5	20985.00	55.9 PK	74.0	-18.1	3.52 H	331	58.7	-2.8
6	20985.00	44.5 AV	54.0	-9.5	3.52 H	331	47.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.5 PK			1.37 V	300	93.5	8.0
2	*6995.00	90.1 AV			1.37 V	300	82.1	8.0
3	#13990.00	54.2 PK	88.2	-34.0	3.91 V	314	38.6	15.6
4	#13990.00	42.0 AV	68.2	-26.2	3.91 V	314	26.4	15.6
5	20985.00	56.9 PK	74.0	-17.1	3.17 V	145	59.7	-2.8
6	20985.00	46.3 AV	54.0	-7.7	3.17 V	145	49.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			1.18 H	19	92.5	9.5
2	*7115.00	90.5 AV			1.18 H	19	81.0	9.5
3	#7125.00	85.6 PK	88.2	-2.6	1.18 H	19	76.2	9.4
4	#7125.00	63.7 AV	68.2	-4.5	1.18 H	19	54.3	9.4
5	7250.00	54.6 PK	74.0	-19.4	1.18 H	19	45.9	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.18 H	19	34.6	8.7
7	#14230.00	50.7 PK	88.2	-37.5	3.78 H	103	35.4	15.3
8	#14230.00	38.4 AV	68.2	-29.8	3.78 H	103	23.1	15.3
9	21345.00	55.8 PK	74.0	-18.2	3.56 H	324	57.4	-1.6
10	21345.00	44.4 AV	54.0	-9.6	3.56 H	324	46.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			1.36 V	308	91.5	9.5
2	*7115.00	89.3 AV			1.36 V	308	79.8	9.5
3	#7125.00	84.1 PK	88.2	-4.1	1.36 V	308	74.7	9.4
4	#7125.00	58.8 AV	68.2	-9.4	1.36 V	308	49.4	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.36 V	308	46.9	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.36 V	308	34.8	8.7
7	#14230.00	53.9 PK	88.2	-34.3	3.87 V	318	38.6	15.3
8	#14230.00	41.6 AV	68.2	-26.6	3.87 V	318	26.3	15.3
9	21345.00	56.9 PK	74.0	-17.1	3.20 V	157	58.5	-1.6
10	21345.00	45.9 AV	54.0	-8.1	3.20 V	157	47.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	3.82 H	100	73.1	4.3
2	#5925.00	65.4 AV	68.2	-2.8	3.82 H	100	61.1	4.3
3	*5965.00	112.6 PK			3.82 H	100	108.2	4.4
4	*5965.00	101.7 AV			3.82 H	100	97.3	4.4
5	11930.00	50.7 PK	74.0	-23.3	3.85 H	105	38.6	12.1
6	11930.00	39.6 AV	54.0	-14.4	3.85 H	105	27.5	12.1
7	17895.00	55.2 PK	74.0	-18.8	3.59 H	324	32.9	22.3
8	17895.00	45.0 AV	54.0	-9.0	3.59 H	324	22.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	3.84 V	349	69.3	4.3
2	#5925.00	59.9 AV	68.2	-8.3	3.84 V	349	55.6	4.3
3	*5965.00	110.0 PK			3.84 V	349	105.6	4.4
4	*5965.00	98.6 AV			3.84 V	349	94.2	4.4
5	11930.00	53.9 PK	74.0	-20.1	3.82 V	318	41.8	12.1
6	11930.00	41.9 AV	54.0	-12.1	3.82 V	318	29.8	12.1
7	17895.00	57.9 PK	74.0	-16.1	3.22 V	181	35.6	22.3
8	17895.00	46.9 AV	54.0	-7.1	3.22 V	181	24.6	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.9 PK			1.02 H	81	108.0	4.9
2	*6205.00	100.8 AV			1.02 H	81	95.9	4.9
3	12410.00	51.0 PK	74.0	-23.0	3.60 H	73	38.7	12.3
4	12410.00	39.1 AV	54.0	-14.9	3.60 H	73	26.8	12.3
5	18615.00	56.4 PK	74.0	-17.6	3.63 H	320	61.3	-4.9
6	18615.00	44.9 AV	54.0	-9.1	3.63 H	320	49.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	109.8 PK			1.09 V	87	104.9	4.9
2	*6205.00	98.0 AV			1.09 V	87	93.1	4.9
3	12410.00	53.8 PK	74.0	-20.2	3.86 V	301	41.5	12.3
4	12410.00	41.8 AV	54.0	-12.2	3.86 V	301	29.5	12.3
5	18615.00	57.9 PK	74.0	-16.1	3.20 V	154	62.8	-4.9
6	18615.00	46.9 AV	54.0	-7.1	3.20 V	154	51.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.1 PK			1.08 H	65	107.7	6.4
2	*6405.00	101.9 AV			1.08 H	65	95.5	6.4
3	#12810.00	50.7 PK	88.2	-37.5	3.87 H	110	37.9	12.8
4	#12810.00	38.3 AV	68.2	-29.9	3.87 H	110	25.5	12.8
5	19215.00	55.5 PK	74.0	-18.5	3.59 H	348	59.2	-3.7
6	19215.00	44.2 AV	54.0	-9.8	3.59 H	348	47.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.4 PK			1.15 V	116	104.0	6.4
2	*6405.00	98.5 AV			1.15 V	116	92.1	6.4
3	#12810.00	54.5 PK	88.2	-33.7	3.88 V	303	41.7	12.8
4	#12810.00	42.0 AV	68.2	-26.2	3.88 V	303	29.2	12.8
5	19215.00	57.5 PK	74.0	-16.5	3.20 V	174	61.2	-3.7
6	19215.00	46.6 AV	54.0	-7.4	3.20 V	174	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	101.9 PK			1.16 H	188	95.5	6.4
2	*6445.00	90.5 AV			1.16 H	188	84.1	6.4
3	#12890.00	50.7 PK	88.2	-37.5	3.78 H	120	37.7	13.0
4	#12890.00	38.1 AV	68.2	-30.1	3.78 H	120	25.1	13.0
5	19335.00	55.9 PK	74.0	-18.1	3.54 H	324	59.6	-3.7
6	19335.00	44.6 AV	54.0	-9.4	3.54 H	324	48.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.2 PK			1.07 V	309	95.8	6.4
2	*6445.00	90.7 AV			1.07 V	309	84.3	6.4
3	#12890.00	53.9 PK	88.2	-34.3	3.81 V	306	40.9	13.0
4	#12890.00	41.7 AV	68.2	-26.5	3.81 V	306	28.7	13.0
5	19335.00	56.8 PK	74.0	-17.2	3.15 V	143	60.5	-3.7
6	19335.00	46.1 AV	54.0	-7.9	3.15 V	143	49.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.9 PK			1.07 H	66	108.2	6.7
2	*6485.00	101.9 AV			1.07 H	66	95.2	6.7
3	#12970.00	50.2 PK	88.2	-38.0	3.76 H	112	37.1	13.1
4	#12970.00	38.3 AV	68.2	-29.9	3.76 H	112	25.2	13.1
5	19455.00	55.3 PK	74.0	-18.7	3.49 H	321	59.2	-3.9
6	19455.00	44.0 AV	54.0	-10.0	3.49 H	321	47.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.8 PK			1.10 V	115	104.1	6.7
2	*6485.00	98.7 AV			1.10 V	115	92.0	6.7
3	#12970.00	53.9 PK	88.2	-34.3	3.91 V	300	40.8	13.1
4	#12970.00	41.7 AV	68.2	-26.5	3.91 V	300	28.6	13.1
5	19455.00	58.4 PK	74.0	-15.6	3.18 V	157	62.3	-3.9
6	19455.00	47.3 AV	54.0	-6.7	3.18 V	157	51.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.9 PK			1.15 H	202	95.0	6.9
2	*6525.00	90.7 AV			1.15 H	202	83.8	6.9
3	#13050.00	50.2 PK	88.2	-38.0	3.77 H	115	37.0	13.2
4	#13050.00	38.1 AV	68.2	-30.1	3.77 H	115	24.9	13.2
5	19575.00	55.4 PK	74.0	-18.6	3.54 H	327	59.5	-4.1
6	19575.00	44.4 AV	54.0	-9.6	3.54 H	327	48.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.6 PK			1.04 V	292	95.7	6.9
2	*6525.00	91.5 AV			1.04 V	292	84.6	6.9
3	#13050.00	53.1 PK	88.2	-35.1	3.89 V	300	39.9	13.2
4	#13050.00	41.1 AV	68.2	-27.1	3.89 V	300	27.9	13.2
5	19575.00	56.7 PK	74.0	-17.3	3.20 V	148	60.8	-4.1
6	19575.00	45.9 AV	54.0	-8.1	3.20 V	148	50.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.6 PK			1.06 H	64	107.7	6.9
2	*6565.00	102.6 AV			1.06 H	64	95.7	6.9
3	#13130.00	51.0 PK	88.2	-37.2	3.81 H	110	37.8	13.2
4	#13130.00	38.7 AV	68.2	-29.5	3.81 H	110	25.5	13.2
5	19695.00	55.4 PK	74.0	-18.6	3.53 H	325	59.3	-3.9
6	19695.00	44.3 AV	54.0	-9.7	3.53 H	325	48.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.7 PK			1.17 V	90	103.8	6.9
2	*6565.00	98.8 AV			1.17 V	90	91.9	6.9
3	#13130.00	53.7 PK	88.2	-34.5	3.88 V	303	40.5	13.2
4	#13130.00	41.4 AV	68.2	-26.8	3.88 V	303	28.2	13.2
5	19695.00	57.4 PK	74.0	-16.6	3.26 V	176	61.3	-3.9
6	19695.00	46.5 AV	54.0	-7.5	3.26 V	176	50.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	112.9 PK			1.06 H	60	105.7	7.2
2	*6685.00	101.7 AV			1.06 H	60	94.5	7.2
3	13370.00	50.5 PK	74.0	-23.5	3.82 H	94	36.5	14.0
4	13370.00	38.0 AV	54.0	-16.0	3.82 H	94	24.0	14.0
5	20055.00	55.0 PK	74.0	-19.0	3.53 H	348	58.5	-3.5
6	20055.00	43.8 AV	54.0	-10.2	3.53 H	348	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.3 PK			1.14 V	114	103.1	7.2
2	*6685.00	98.2 AV			1.14 V	114	91.0	7.2
3	13370.00	54.3 PK	74.0	-19.7	3.82 V	326	40.3	14.0
4	13370.00	42.1 AV	54.0	-11.9	3.82 V	326	28.1	14.0
5	20055.00	58.3 PK	74.0	-15.7	3.23 V	156	61.8	-3.5
6	20055.00	47.1 AV	54.0	-6.9	3.23 V	156	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.3 PK			1.14 H	57	106.2	7.1
2	*6845.00	101.6 AV			1.14 H	57	94.5	7.1
3	#13690.00	50.0 PK	88.2	-38.2	3.86 H	112	34.9	15.1
4	#13690.00	37.8 AV	68.2	-30.4	3.86 H	112	22.7	15.1
5	20535.00	55.9 PK	74.0	-18.1	3.58 H	332	59.1	-3.2
6	20535.00	44.5 AV	54.0	-9.5	3.58 H	332	47.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.3 PK			1.14 V	101	103.2	7.1
2	*6845.00	98.4 AV			1.14 V	101	91.3	7.1
3	#13690.00	54.0 PK	88.2	-34.2	3.81 V	308	38.9	15.1
4	#13690.00	42.0 AV	68.2	-26.2	3.81 V	308	26.9	15.1
5	20535.00	58.2 PK	74.0	-15.8	3.23 V	174	61.4	-3.2
6	20535.00	46.8 AV	54.0	-7.2	3.23 V	174	50.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.6 PK			1.14 H	184	95.4	7.2
2	*6885.00	91.1 AV			1.14 H	184	83.9	7.2
3	#13770.00	50.7 PK	88.2	-37.5	3.84 H	109	35.7	15.0
4	#13770.00	38.6 AV	68.2	-29.6	3.84 H	109	23.6	15.0
5	20655.00	55.2 PK	74.0	-18.8	3.50 H	329	58.5	-3.3
6	20655.00	43.8 AV	54.0	-10.2	3.50 H	329	47.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.1 PK			1.04 V	299	94.9	7.2
2	*6885.00	90.8 AV			1.04 V	299	83.6	7.2
3	#13770.00	54.1 PK	88.2	-34.1	3.84 V	314	39.1	15.0
4	#13770.00	41.7 AV	68.2	-26.5	3.84 V	314	26.7	15.0
5	20655.00	57.5 PK	74.0	-16.5	3.20 V	162	60.8	-3.3
6	20655.00	46.5 AV	54.0	-7.5	3.20 V	162	49.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.3 PK			1.12 H	195	94.6	7.7
2	*6965.00	91.0 AV			1.12 H	195	83.3	7.7
3	#13930.00	50.6 PK	88.2	-37.6	3.84 H	124	35.3	15.3
4	#13930.00	38.5 AV	68.2	-29.7	3.84 H	124	23.2	15.3
5	20895.00	55.1 PK	74.0	-18.9	3.49 H	328	57.8	-2.7
6	20895.00	43.7 AV	54.0	-10.3	3.49 H	328	46.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.5 PK			1.14 V	302	94.8	7.7
2	*6965.00	91.1 AV			1.14 V	302	83.4	7.7
3	#13930.00	53.6 PK	88.2	-34.6	3.85 V	308	38.3	15.3
4	#13930.00	41.4 AV	68.2	-26.8	3.85 V	308	26.1	15.3
5	20895.00	57.7 PK	74.0	-16.3	3.20 V	153	60.4	-2.7
6	20895.00	46.6 AV	54.0	-7.4	3.20 V	153	49.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	102.6 PK			1.00 H	196	93.4	9.2
2	*7085.00	90.5 AV			1.00 H	196	81.3	9.2
3	#7125.00	56.6 PK	88.2	-31.6	1.00 H	196	47.2	9.4
4	#7125.00	44.9 AV	68.2	-23.3	1.00 H	196	35.5	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.00 H	196	46.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.00 H	196	34.7	8.7
7	#14170.00	50.5 PK	88.2	-37.7	3.76 H	128	35.3	15.2
8	#14170.00	38.3 AV	68.2	-29.9	3.76 H	128	23.1	15.2
9	21255.00	55.1 PK	74.0	-18.9	3.47 H	326	56.5	-1.4
10	21255.00	43.7 AV	54.0	-10.3	3.47 H	326	45.1	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	102.3 PK			1.10 V	306	93.1	9.2
2	*7085.00	91.1 AV			1.10 V	306	81.9	9.2
3	#7125.00	56.5 PK	88.2	-31.7	1.10 V	306	47.1	9.4
4	#7125.00	45.2 AV	68.2	-23.0	1.10 V	306	35.8	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.10 V	306	46.8	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.10 V	306	34.7	8.7
7	#14170.00	54.0 PK	88.2	-34.2	3.83 V	329	38.8	15.2
8	#14170.00	42.0 AV	68.2	-26.2	3.83 V	329	26.8	15.2
9	21255.00	57.1 PK	74.0	-16.9	3.14 V	165	58.5	-1.4
10	21255.00	46.2 AV	54.0	-7.8	3.14 V	165	47.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	1.00 H	0	72.0	4.3
2	#5925.00	65.0 AV	68.2	-3.2	1.00 H	0	60.7	4.3
3	*5985.00	107.9 PK			1.11 H	296	103.5	4.4
4	*5985.00	96.6 AV			1.11 H	296	92.2	4.4
5	11970.00	50.8 PK	74.0	-23.2	3.78 H	88	38.6	12.2
6	11970.00	38.6 AV	54.0	-15.4	3.78 H	88	26.4	12.2
7	17955.00	55.4 PK	74.0	-18.6	3.56 H	326	32.0	23.4
8	17955.00	44.3 AV	54.0	-9.7	3.56 H	326	20.9	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	3.47 V	341	72.2	4.3
2	#5925.00	64.0 AV	68.2	-4.2	3.47 V	341	59.7	4.3
3	*5985.00	105.9 PK			3.47 V	341	101.5	4.4
4	*5985.00	94.9 AV			3.47 V	341	90.5	4.4
5	11970.00	54.1 PK	74.0	-19.9	3.90 V	307	41.9	12.2
6	11970.00	41.9 AV	54.0	-12.1	3.90 V	307	29.7	12.2
7	17955.00	58.0 PK	74.0	-16.0	3.18 V	170	34.6	23.4
8	17955.00	46.9 AV	54.0	-7.1	3.18 V	170	23.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.8 PK			3.31 H	250	105.8	5.0
2	*6225.00	99.8 AV			3.31 H	250	94.8	5.0
3	12450.00	50.6 PK	74.0	-23.4	3.82 H	108	38.3	12.3
4	12450.00	38.2 AV	54.0	-15.8	3.82 H	108	25.9	12.3
5	18675.00	55.8 PK	74.0	-18.2	3.56 H	333	60.7	-4.9
6	18675.00	44.7 AV	54.0	-9.3	3.56 H	333	49.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.8 PK			1.14 V	106	104.8	5.0
2	*6225.00	96.7 AV			1.14 V	106	91.7	5.0
3	12450.00	54.2 PK	74.0	-19.8	3.81 V	331	41.9	12.3
4	12450.00	42.0 AV	54.0	-12.0	3.81 V	331	29.7	12.3
5	18675.00	57.8 PK	74.0	-16.2	3.17 V	164	62.7	-4.9
6	18675.00	46.4 AV	54.0	-7.6	3.17 V	164	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.1 PK			3.72 H	244	104.9	6.2
2	*6385.00	99.9 AV			3.72 H	244	93.7	6.2
3	#12770.00	50.8 PK	88.2	-37.4	3.75 H	107	38.0	12.8
4	#12770.00	38.3 AV	68.2	-29.9	3.75 H	107	25.5	12.8
5	19155.00	55.7 PK	74.0	-18.3	3.52 H	325	59.5	-3.8
6	19155.00	44.5 AV	54.0	-9.5	3.52 H	325	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.0 PK			1.17 V	117	102.8	6.2
2	*6385.00	96.1 AV			1.17 V	117	89.9	6.2
3	#12770.00	53.5 PK	88.2	-34.7	3.81 V	329	40.7	12.8
4	#12770.00	41.3 AV	68.2	-26.9	3.81 V	329	28.5	12.8
5	19155.00	58.3 PK	74.0	-15.7	3.17 V	184	62.1	-3.8
6	19155.00	47.3 AV	54.0	-6.7	3.17 V	184	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.6 PK			1.23 H	204	104.1	6.5
2	*6465.00	98.8 AV			1.23 H	204	92.3	6.5
3	#12930.00	50.4 PK	88.2	-37.8	3.77 H	87	37.3	13.1
4	#12930.00	38.4 AV	68.2	-29.8	3.77 H	87	25.3	13.1
5	19395.00	55.7 PK	74.0	-18.3	3.51 H	333	59.4	-3.7
6	19395.00	44.8 AV	54.0	-9.2	3.51 H	333	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.2 PK			1.10 V	106	102.7	6.5
2	*6465.00	96.6 AV			1.10 V	106	90.1	6.5
3	#12930.00	54.3 PK	88.2	-33.9	3.86 V	332	41.2	13.1
4	#12930.00	41.8 AV	68.2	-26.4	3.86 V	332	28.7	13.1
5	19395.00	57.2 PK	74.0	-16.8	3.25 V	162	60.9	-3.7
6	19395.00	46.4 AV	54.0	-7.6	3.25 V	162	50.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	102.4 PK			1.08 H	207	95.5	6.9
2	*6545.00	90.7 AV			1.08 H	207	83.8	6.9
3	#13090.00	50.3 PK	88.2	-37.9	3.76 H	101	37.1	13.2
4	#13090.00	38.0 AV	68.2	-30.2	3.76 H	101	24.8	13.2
5	19635.00	55.2 PK	74.0	-18.8	3.54 H	332	59.2	-4.0
6	19635.00	44.0 AV	54.0	-10.0	3.54 H	332	48.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.0 PK			1.13 V	301	94.1	6.9
2	*6545.00	90.4 AV			1.13 V	301	83.5	6.9
3	#13090.00	54.6 PK	88.2	-33.6	3.86 V	329	41.4	13.2
4	#13090.00	42.1 AV	68.2	-26.1	3.86 V	329	28.9	13.2
5	19635.00	57.5 PK	74.0	-16.5	3.23 V	145	61.5	-4.0
6	19635.00	46.7 AV	54.0	-7.3	3.23 V	145	50.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.5 PK			3.34 H	247	104.6	6.9
2	*6625.00	99.9 AV			3.34 H	247	93.0	6.9
3	13250.00	50.2 PK	74.0	-23.8	3.77 H	100	36.6	13.6
4	13250.00	37.8 AV	54.0	-16.2	3.77 H	100	24.2	13.6
5	19875.00	55.4 PK	74.0	-18.6	3.53 H	342	58.9	-3.5
6	19875.00	44.2 AV	54.0	-9.8	3.53 H	342	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.8 PK			1.17 V	100	102.9	6.9
2	*6625.00	96.7 AV			1.17 V	100	89.8	6.9
3	13250.00	54.1 PK	74.0	-19.9	3.80 V	329	40.5	13.6
4	13250.00	41.7 AV	54.0	-12.3	3.80 V	329	28.1	13.6
5	19875.00	58.2 PK	74.0	-15.8	3.20 V	163	61.7	-3.5
6	19875.00	46.8 AV	54.0	-7.2	3.20 V	163	50.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.9 PK			1.10 H	201	103.7	7.2
2	*6705.00	99.3 AV			1.10 H	201	92.1	7.2
3	#13410.00	51.1 PK	88.2	-37.1	3.86 H	97	36.9	14.2
4	#13410.00	38.6 AV	68.2	-29.6	3.86 H	97	24.4	14.2
5	20115.00	55.5 PK	74.0	-18.5	3.56 H	318	59.0	-3.5
6	20115.00	44.0 AV	54.0	-10.0	3.56 H	318	47.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.8 PK			1.13 V	89	102.6	7.2
2	*6705.00	96.9 AV			1.13 V	89	89.7	7.2
3	#13410.00	53.8 PK	88.2	-34.4	3.86 V	321	39.6	14.2
4	#13410.00	41.5 AV	68.2	-26.7	3.86 V	321	27.3	14.2
5	20115.00	58.4 PK	74.0	-15.6	3.27 V	172	61.9	-3.5
6	20115.00	47.2 AV	54.0	-6.8	3.27 V	172	50.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.1 PK			1.09 H	200	106.1	7.0
2	*6785.00	100.4 AV			1.09 H	200	93.4	7.0
3	#13570.00	50.2 PK	88.2	-38.0	3.81 H	87	35.6	14.6
4	#13570.00	38.0 AV	68.2	-30.2	3.81 H	87	23.4	14.6
5	20355.00	56.0 PK	74.0	-18.0	3.52 H	335	59.1	-3.1
6	20355.00	44.6 AV	54.0	-9.4	3.52 H	335	47.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.4 PK			1.14 V	103	102.4	7.0
2	*6785.00	96.6 AV			1.14 V	103	89.6	7.0
3	#13570.00	54.2 PK	88.2	-34.0	3.86 V	316	39.6	14.6
4	#13570.00	41.7 AV	68.2	-26.5	3.86 V	316	27.1	14.6
5	20355.00	58.0 PK	74.0	-16.0	3.20 V	177	61.1	-3.1
6	20355.00	47.0 AV	54.0	-7.0	3.20 V	177	50.1	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.6 PK			1.08 H	197	95.4	7.2
2	*6865.00	91.1 AV			1.08 H	197	83.9	7.2
3	#13730.00	50.8 PK	88.2	-37.4	3.84 H	111	35.7	15.1
4	#13730.00	38.4 AV	68.2	-29.8	3.84 H	111	23.3	15.1
5	20595.00	55.0 PK	74.0	-19.0	3.46 H	306	58.3	-3.3
6	20595.00	44.0 AV	54.0	-10.0	3.46 H	306	47.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	100.5 PK			1.12 V	290	93.3	7.2
2	*6865.00	89.7 AV			1.12 V	290	82.5	7.2
3	#13730.00	54.2 PK	88.2	-34.0	3.85 V	325	39.1	15.1
4	#13730.00	42.0 AV	68.2	-26.2	3.85 V	325	26.9	15.1
5	20595.00	57.6 PK	74.0	-16.4	3.14 V	151	60.9	-3.3
6	20595.00	46.6 AV	54.0	-7.4	3.14 V	151	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	101.7 PK			1.03 H	196	94.2	7.5
2	*6945.00	89.5 AV			1.03 H	196	82.0	7.5
3	#13890.00	50.5 PK	88.2	-37.7	3.78 H	105	35.3	15.2
4	#13890.00	38.0 AV	68.2	-30.2	3.78 H	105	22.8	15.2
5	20835.00	55.3 PK	74.0	-18.7	3.51 H	330	58.2	-2.9
6	20835.00	44.3 AV	54.0	-9.7	3.51 H	330	47.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	100.8 PK			1.19 V	299	93.3	7.5
2	*6945.00	89.8 AV			1.19 V	299	82.3	7.5
3	#13890.00	54.3 PK	88.2	-33.9	3.80 V	312	39.1	15.2
4	#13890.00	41.9 AV	68.2	-26.3	3.80 V	312	26.7	15.2
5	20835.00	57.5 PK	74.0	-16.5	3.20 V	151	60.4	-2.9
6	20835.00	46.4 AV	54.0	-7.6	3.20 V	151	49.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.8 PK			1.11 H	194	93.4	8.4
2	*7025.00	90.5 AV			1.11 H	194	82.1	8.4
3	#7125.00	58.0 PK	88.2	-30.2	1.11 H	194	48.6	9.4
4	#7125.00	46.0 AV	68.2	-22.2	1.11 H	194	36.6	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.11 H	194	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.11 H	194	34.7	8.7
7	#14050.00	50.9 PK	88.2	-37.3	3.83 H	122	35.4	15.5
8	#14050.00	38.7 AV	68.2	-29.5	3.83 H	122	23.2	15.5
9	21075.00	55.3 PK	74.0	-18.7	3.51 H	306	57.5	-2.2
10	21075.00	44.3 AV	54.0	-9.7	3.51 H	306	46.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.1 PK			1.18 V	304	92.7	8.4
2	*7025.00	90.2 AV			1.18 V	304	81.8	8.4
3	#7125.00	58.7 PK	88.2	-29.5	1.18 V	304	49.3	9.4
4	#7125.00	46.3 AV	68.2	-21.9	1.18 V	304	36.9	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.18 V	304	46.3	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.18 V	304	34.9	8.7
7	#14050.00	54.3 PK	88.2	-33.9	3.81 V	327	38.8	15.5
8	#14050.00	41.8 AV	68.2	-26.4	3.81 V	327	26.3	15.5
9	21075.00	56.7 PK	74.0	-17.3	3.13 V	159	58.9	-2.2
10	21075.00	45.8 AV	54.0	-8.2	3.13 V	159	48.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.6 PK	88.2	-11.6	1.00 H	0	72.3	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.00 H	0	60.8	4.3
3	*6025.00	106.4 PK			1.07 H	243	102.2	4.2
4	*6025.00	94.6 AV			1.07 H	243	90.4	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.83 H	113	38.4	12.4
6	12050.00	38.6 AV	54.0	-15.4	3.83 H	113	26.2	12.4
7	18075.00	55.2 PK	74.0	-18.8	3.59 H	347	59.9	-4.7
8	18075.00	43.8 AV	54.0	-10.2	3.59 H	347	48.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	3.46 V	340	72.2	4.3
2	#5925.00	61.1 AV	68.2	-7.1	3.46 V	340	56.8	4.3
3	*6025.00	103.1 PK			3.46 V	340	98.9	4.2
4	*6025.00	91.7 AV			3.46 V	340	87.5	4.2
5	12050.00	53.6 PK	74.0	-20.4	3.81 V	315	41.2	12.4
6	12050.00	41.6 AV	54.0	-12.4	3.81 V	315	29.2	12.4
7	18075.00	57.7 PK	74.0	-16.3	3.27 V	171	62.4	-4.7
8	18075.00	46.4 AV	54.0	-7.6	3.27 V	171	51.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.9 PK			1.05 H	81	104.1	4.8
2	*6185.00	97.2 AV			1.05 H	81	92.4	4.8
3	12370.00	50.5 PK	74.0	-23.5	3.85 H	90	38.2	12.3
4	12370.00	38.1 AV	54.0	-15.9	3.85 H	90	25.8	12.3
5	18555.00	55.3 PK	74.0	-18.7	3.55 H	322	60.2	-4.9
6	18555.00	44.2 AV	54.0	-9.8	3.55 H	322	49.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	104.8 PK			1.17 V	87	100.0	4.8
2	*6185.00	93.3 AV			1.17 V	87	88.5	4.8
3	12370.00	53.4 PK	74.0	-20.6	3.84 V	305	41.1	12.3
4	12370.00	41.5 AV	54.0	-12.5	3.84 V	305	29.2	12.3
5	18555.00	57.7 PK	74.0	-16.3	3.23 V	178	62.6	-4.9
6	18555.00	46.4 AV	54.0	-7.6	3.23 V	178	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.9 PK			1.17 H	68	101.8	6.1
2	*6345.00	96.3 AV			1.17 H	68	90.2	6.1
3	12690.00	50.6 PK	74.0	-23.4	3.81 H	111	37.7	12.9
4	12690.00	38.4 AV	54.0	-15.6	3.81 H	111	25.5	12.9
5	19035.00	55.0 PK	74.0	-19.0	3.59 H	329	58.9	-3.9
6	19035.00	44.1 AV	54.0	-9.9	3.59 H	329	48.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.7 PK			1.16 V	96	98.6	6.1
2	*6345.00	93.0 AV			1.16 V	96	86.9	6.1
3	12690.00	53.6 PK	74.0	-20.4	3.92 V	324	40.7	12.9
4	12690.00	41.3 AV	54.0	-12.7	3.92 V	324	28.4	12.9
5	19035.00	57.5 PK	74.0	-16.5	3.24 V	178	61.4	-3.9
6	19035.00	46.5 AV	54.0	-7.5	3.24 V	178	50.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.2 PK			1.09 H	66	102.4	6.8
2	*6505.00	97.2 AV			1.09 H	66	90.4	6.8
3	#13010.00	50.2 PK	88.2	-38.0	3.77 H	103	37.0	13.2
4	#13010.00	38.1 AV	68.2	-30.1	3.77 H	103	24.9	13.2
5	19515.00	55.5 PK	74.0	-18.5	3.58 H	322	59.6	-4.1
6	19515.00	44.1 AV	54.0	-9.9	3.58 H	322	48.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.8 PK			1.16 V	122	98.0	6.8
2	*6505.00	92.8 AV			1.16 V	122	86.0	6.8
3	#13010.00	53.9 PK	88.2	-34.3	3.91 V	304	40.7	13.2
4	#13010.00	42.0 AV	68.2	-26.2	3.91 V	304	28.8	13.2
5	19515.00	58.7 PK	74.0	-15.3	3.25 V	185	62.8	-4.1
6	19515.00	47.3 AV	54.0	-6.7	3.25 V	185	51.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.8 PK			1.07 H	62	100.6	7.2
2	*6665.00	95.8 AV			1.07 H	62	88.6	7.2
3	13330.00	50.2 PK	74.0	-23.8	3.79 H	105	36.4	13.8
4	13330.00	38.2 AV	54.0	-15.8	3.79 H	105	24.4	13.8
5	19995.00	55.6 PK	74.0	-18.4	3.49 H	332	59.2	-3.6
6	19995.00	44.5 AV	54.0	-9.5	3.49 H	332	48.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.4 PK			1.21 V	92	98.2	7.2
2	*6665.00	94.5 AV			1.21 V	92	87.3	7.2
3	13330.00	53.2 PK	74.0	-20.8	3.84 V	313	39.4	13.8
4	13330.00	41.2 AV	54.0	-12.8	3.84 V	313	27.4	13.8
5	19995.00	58.3 PK	74.0	-15.7	3.22 V	174	61.9	-3.6
6	19995.00	47.1 AV	54.0	-6.9	3.22 V	174	50.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	103.5 PK			1.03 H	206	96.4	7.1
2	*6825.00	91.7 AV			1.03 H	206	84.6	7.1
3	#13650.00	50.3 PK	88.2	-37.9	3.81 H	107	35.4	14.9
4	#13650.00	38.1 AV	68.2	-30.1	3.81 H	107	23.2	14.9
5	20475.00	55.8 PK	74.0	-18.2	3.55 H	313	59.0	-3.2
6	20475.00	44.5 AV	54.0	-9.5	3.55 H	313	47.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	102.2 PK			1.14 V	298	95.1	7.1
2	*6825.00	90.4 AV			1.14 V	298	83.3	7.1
3	#13650.00	54.0 PK	88.2	-34.2	3.88 V	327	39.1	14.9
4	#13650.00	41.6 AV	68.2	-26.6	3.88 V	327	26.7	14.9
5	20475.00	56.7 PK	74.0	-17.3	3.22 V	144	59.9	-3.2
6	20475.00	45.8 AV	54.0	-8.2	3.22 V	144	49.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.1 PK			1.16 H	18	94.3	7.8
2	*6985.00	90.3 AV			1.16 H	18	82.5	7.8
3	#7125.00	69.4 PK	88.2	-18.8	1.16 H	18	60.0	9.4
4	#7125.00	57.5 AV	68.2	-10.7	1.16 H	18	48.1	9.4
5	7250.00	56.2 PK	74.0	-17.8	1.16 H	18	47.5	8.7
6	7250.00	44.6 AV	54.0	-9.4	1.16 H	18	35.9	8.7
7	#13970.00	51.2 PK	88.2	-37.0	3.76 H	117	35.7	15.5
8	#13970.00	38.7 AV	68.2	-29.5	3.76 H	117	23.2	15.5
9	20955.00	55.7 PK	74.0	-18.3	3.54 H	337	58.4	-2.7
10	20955.00	44.3 AV	54.0	-9.7	3.54 H	337	47.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.1 PK			1.18 V	302	94.3	7.8
2	*6985.00	90.2 AV			1.18 V	302	82.4	7.8
3	#7125.00	68.4 PK	88.2	-19.8	1.18 V	302	59.0	9.4
4	#7125.00	56.9 AV	68.2	-11.3	1.18 V	302	47.5	9.4
5	7250.00	56.4 PK	74.0	-17.6	1.18 V	302	47.7	8.7
6	7250.00	44.5 AV	54.0	-9.5	1.18 V	302	35.8	8.7
7	#13970.00	54.2 PK	88.2	-34.0	3.80 V	316	38.7	15.5
8	#13970.00	41.9 AV	68.2	-26.3	3.80 V	316	26.4	15.5
9	20955.00	56.8 PK	74.0	-17.2	3.15 V	149	59.5	-2.7
10	20955.00	46.0 AV	54.0	-8.0	3.15 V	149	48.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	1.00 H	0	65.8	4.3
2	#5925.00	50.3 AV	68.2	-17.9	1.00 H	0	46.0	4.3
3	*5955.00	121.1 PK			1.10 H	245	116.6	4.5
4	*5955.00	112.8 AV			1.10 H	245	108.3	4.5
5	11910.00	50.2 PK	74.0	-23.8	3.57 H	83	38.0	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.57 H	83	26.5	12.2
7	17865.00	55.3 PK	74.0	-18.7	3.54 H	296	33.4	21.9
8	17865.00	44.1 AV	54.0	-9.9	3.54 H	296	22.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.8 PK	88.2	-20.4	1.15 V	105	63.5	4.3
2	#5925.00	49.2 AV	68.2	-19.0	1.15 V	105	44.9	4.3
3	*5955.00	119.6 PK			1.15 V	105	115.1	4.5
4	*5955.00	111.2 AV			1.15 V	105	106.7	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.90 V	321	41.6	12.2
6	11910.00	41.5 AV	54.0	-12.5	3.90 V	321	29.3	12.2
7	17865.00	57.9 PK	74.0	-16.1	3.23 V	157	36.0	21.9
8	17865.00	47.0 AV	54.0	-7.0	3.23 V	157	25.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.6 PK			1.07 H	63	117.8	4.8
2	*6195.00	113.9 AV			1.07 H	63	109.1	4.8
3	12390.00	50.6 PK	74.0	-23.4	3.76 H	61	38.3	12.3
4	12390.00	39.2 AV	54.0	-14.8	3.76 H	61	26.9	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.40 H	307	60.2	-5.0
6	18585.00	44.2 AV	54.0	-9.8	3.40 H	307	49.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.0 PK			3.60 V	360	113.2	4.8
2	*6195.00	112.6 AV			3.60 V	360	107.8	4.8
3	12390.00	53.8 PK	74.0	-20.2	3.90 V	312	41.5	12.3
4	12390.00	41.4 AV	54.0	-12.6	3.90 V	312	29.1	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.22 V	175	62.4	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.22 V	175	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.1 PK			1.10 H	65	116.7	6.4
2	*6415.00	115.5 AV			1.10 H	65	109.1	6.4
3	#12830.00	51.1 PK	88.2	-37.1	3.87 H	82	38.1	13.0
4	#12830.00	39.7 AV	68.2	-28.5	3.87 H	82	26.7	13.0
5	19245.00	55.4 PK	74.0	-18.6	3.54 H	318	59.2	-3.8
6	19245.00	43.4 AV	54.0	-10.6	3.54 H	318	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.4 PK			3.64 V	360	112.0	6.4
2	*6415.00	112.6 AV			3.64 V	360	106.2	6.4
3	#12830.00	53.4 PK	88.2	-34.8	3.81 V	323	40.4	13.0
4	#12830.00	41.3 AV	68.2	-26.9	3.81 V	323	28.3	13.0
5	19245.00	58.2 PK	74.0	-15.8	3.27 V	165	62.0	-3.8
6	19245.00	47.3 AV	54.0	-6.7	3.27 V	165	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.1 PK			1.13 H	35	94.7	6.4
2	*6435.00	90.5 AV			1.13 H	35	84.1	6.4
3	#12870.00	49.9 PK	88.2	-38.3	3.84 H	124	36.9	13.0
4	#12870.00	37.8 AV	68.2	-30.4	3.84 H	124	24.8	13.0
5	19305.00	55.1 PK	74.0	-18.9	3.56 H	310	58.8	-3.7
6	19305.00	43.7 AV	54.0	-10.3	3.56 H	310	47.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			1.25 V	294	95.1	6.4
2	*6435.00	90.8 AV			1.25 V	294	84.4	6.4
3	#12870.00	53.5 PK	88.2	-34.7	3.90 V	307	40.5	13.0
4	#12870.00	41.4 AV	68.2	-26.8	3.90 V	307	28.4	13.0
5	19305.00	57.7 PK	74.0	-16.3	3.13 V	149	61.4	-3.7
6	19305.00	46.7 AV	54.0	-7.3	3.13 V	149	50.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.7 PK			1.27 H	65	116.1	6.6
2	*6475.00	115.4 AV			1.27 H	65	108.8	6.6
3	#12950.00	50.7 PK	88.2	-37.5	3.82 H	97	37.6	13.1
4	#12950.00	39.0 AV	68.2	-29.2	3.82 H	97	25.9	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.65 H	318	59.2	-3.8
6	19425.00	43.9 AV	54.0	-10.1	3.65 H	318	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.5 PK			3.65 V	360	111.9	6.6
2	*6475.00	113.1 AV			3.65 V	360	106.5	6.6
3	#12950.00	54.1 PK	88.2	-34.1	3.80 V	307	41.0	13.1
4	#12950.00	41.7 AV	68.2	-26.5	3.80 V	307	28.6	13.1
5	19425.00	58.3 PK	74.0	-15.7	3.26 V	175	62.1	-3.8
6	19425.00	47.0 AV	54.0	-7.0	3.26 V	175	50.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.5 PK			1.10 H	64	94.6	6.9
2	*6515.00	91.1 AV			1.10 H	64	84.2	6.9
3	#13030.00	51.0 PK	88.2	-37.2	3.83 H	103	37.8	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.83 H	103	25.5	13.2
5	19545.00	55.0 PK	74.0	-19.0	3.57 H	306	59.1	-4.1
6	19545.00	43.9 AV	54.0	-10.1	3.57 H	306	48.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.9 PK			1.20 V	293	94.0	6.9
2	*6515.00	90.3 AV			1.20 V	293	83.4	6.9
3	#13030.00	54.2 PK	88.2	-34.0	3.85 V	318	41.0	13.2
4	#13030.00	41.9 AV	68.2	-26.3	3.85 V	318	28.7	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.17 V	158	60.8	-4.1
6	19545.00	46.0 AV	54.0	-8.0	3.17 V	158	50.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.1 PK			1.05 H	65	117.2	6.9
2	*6535.00	117.6 AV			1.05 H	65	110.7	6.9
3	#13070.00	51.2 PK	88.2	-37.0	3.79 H	109	38.0	13.2
4	#13070.00	39.5 AV	68.2	-28.7	3.79 H	109	26.3	13.2
5	19605.00	56.2 PK	74.0	-17.8	3.62 H	300	60.2	-4.0
6	19605.00	45.1 AV	54.0	-8.9	3.62 H	300	49.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			3.60 V	360	111.2	6.9
2	*6535.00	112.4 AV			3.60 V	360	105.5	6.9
3	#13070.00	54.1 PK	88.2	-34.1	3.83 V	321	40.9	13.2
4	#13070.00	41.8 AV	68.2	-26.4	3.83 V	321	28.6	13.2
5	19605.00	58.3 PK	74.0	-15.7	3.18 V	172	62.3	-4.0
6	19605.00	47.3 AV	54.0	-6.7	3.18 V	172	51.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			1.02 H	61	114.6	7.2
2	*6695.00	115.3 AV			1.02 H	61	108.1	7.2
3	13390.00	50.7 PK	74.0	-23.3	3.72 H	90	36.7	14.0
4	13390.00	39.4 AV	54.0	-14.6	3.72 H	90	25.4	14.0
5	20085.00	55.0 PK	74.0	-19.0	3.81 H	305	58.5	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.81 H	305	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.9 PK			3.61 V	350	110.7	7.2
2	*6695.00	112.6 AV			3.61 V	350	105.4	7.2
3	13390.00	53.3 PK	74.0	-20.7	3.82 V	320	39.3	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.82 V	320	27.2	14.0
5	20085.00	58.3 PK	74.0	-15.7	3.18 V	166	61.8	-3.5
6	20085.00	47.0 AV	54.0	-7.0	3.18 V	166	50.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.2 PK			1.31 H	56	115.0	7.2
2	*6855.00	115.9 AV			1.31 H	56	108.7	7.2
3	#13710.00	51.1 PK	88.2	-37.1	3.83 H	100	35.9	15.2
4	#13710.00	38.4 AV	68.2	-29.8	3.83 H	100	23.2	15.2
5	20565.00	55.7 PK	74.0	-18.3	3.51 H	295	59.0	-3.3
6	20565.00	44.6 AV	54.0	-9.4	3.51 H	295	47.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			3.60 V	360	111.2	7.2
2	*6855.00	112.8 AV			3.60 V	360	105.6	7.2
3	#13710.00	53.7 PK	88.2	-34.5	3.87 V	315	38.5	15.2
4	#13710.00	41.8 AV	68.2	-26.4	3.87 V	315	26.6	15.2
5	20565.00	58.5 PK	74.0	-15.5	3.25 V	183	61.8	-3.3
6	20565.00	47.2 AV	54.0	-6.8	3.25 V	183	50.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.9 PK			1.01 H	52	94.7	7.2
2	*6875.00	91.2 AV			1.01 H	52	84.0	7.2
3	#13750.00	50.9 PK	88.2	-37.3	3.80 H	99	35.8	15.1
4	#13750.00	38.8 AV	68.2	-29.4	3.80 H	99	23.7	15.1
5	20625.00	55.1 PK	74.0	-18.9	3.56 H	332	58.4	-3.3
6	20625.00	43.9 AV	54.0	-10.1	3.56 H	332	47.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.8 PK			1.18 V	277	94.6	7.2
2	*6875.00	91.0 AV			1.18 V	277	83.8	7.2
3	#13750.00	53.5 PK	88.2	-34.7	3.86 V	302	38.4	15.1
4	#13750.00	41.1 AV	68.2	-27.1	3.86 V	302	26.0	15.1
5	20625.00	57.1 PK	74.0	-16.9	3.24 V	167	60.4	-3.3
6	20625.00	45.9 AV	54.0	-8.1	3.24 V	167	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.8 PK			1.01 H	26	91.8	8.0
2	*6995.00	88.6 AV			1.01 H	26	80.6	8.0
3	#13990.00	50.6 PK	88.2	-37.6	3.80 H	128	35.0	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.80 H	128	22.6	15.6
5	20985.00	54.9 PK	74.0	-19.1	3.56 H	326	57.7	-2.8
6	20985.00	43.8 AV	54.0	-10.2	3.56 H	326	46.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.6 PK			1.19 V	284	93.6	8.0
2	*6995.00	90.8 AV			1.19 V	284	82.8	8.0
3	#13990.00	53.9 PK	88.2	-34.3	3.81 V	302	38.3	15.6
4	#13990.00	41.5 AV	68.2	-26.7	3.81 V	302	25.9	15.6
5	20985.00	57.4 PK	74.0	-16.6	3.19 V	153	60.2	-2.8
6	20985.00	46.6 AV	54.0	-7.4	3.19 V	153	49.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.4 PK			1.19 H	346	88.9	9.5
2	*7115.00	88.4 AV			1.19 H	346	78.9	9.5
3	#7125.00	85.3 PK	88.2	-2.9	1.19 H	346	75.9	9.4
4	#7125.00	55.5 AV	68.2	-12.7	1.19 H	346	46.1	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.19 H	346	46.2	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.19 H	346	34.9	8.7
7	#14230.00	50.5 PK	88.2	-37.7	3.84 H	110	35.2	15.3
8	#14230.00	38.3 AV	68.2	-29.9	3.84 H	110	23.0	15.3
9	21345.00	55.7 PK	74.0	-18.3	3.53 H	335	57.3	-1.6
10	21345.00	44.4 AV	54.0	-9.6	3.53 H	335	46.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.6 PK			1.07 V	317	89.1	9.5
2	*7115.00	88.4 AV			1.07 V	317	78.9	9.5
3	#7125.00	84.5 PK	88.2	-3.7	1.07 V	317	75.1	9.4
4	#7125.00	55.3 AV	68.2	-12.9	1.07 V	317	45.9	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.07 V	317	46.9	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.07 V	317	34.8	8.7
7	#14230.00	53.8 PK	88.2	-34.4	3.86 V	320	38.5	15.3
8	#14230.00	41.2 AV	68.2	-27.0	3.86 V	320	25.9	15.3
9	21345.00	57.6 PK	74.0	-16.4	3.13 V	167	59.2	-1.6
10	21345.00	46.4 AV	54.0	-7.6	3.13 V	167	48.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.8 PK	88.2	-13.4	1.00 H	0	70.5	4.3
2	#5925.00	52.1 AV	68.2	-16.1	1.00 H	0	47.8	4.3
3	*5955.00	119.8 PK			1.04 H	245	115.3	4.5
4	*5955.00	110.8 AV			1.04 H	245	106.3	4.5
5	11910.00	49.9 PK	74.0	-24.1	3.92 H	83	37.7	12.2
6	11910.00	39.1 AV	54.0	-14.9	3.92 H	83	26.9	12.2
7	17865.00	55.3 PK	74.0	-18.7	3.82 H	332	33.4	21.9
8	17865.00	43.8 AV	54.0	-10.2	3.82 H	332	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.7 PK	88.2	-16.5	3.54 V	339	67.4	4.3
2	#5925.00	51.4 AV	68.2	-16.8	3.54 V	339	47.1	4.3
3	*5955.00	118.5 PK			3.54 V	339	114.0	4.5
4	*5955.00	109.4 AV			3.54 V	339	104.9	4.5
5	11910.00	54.0 PK	74.0	-20.0	3.87 V	301	41.8	12.2
6	11910.00	41.6 AV	54.0	-12.4	3.87 V	301	29.4	12.2
7	17865.00	57.6 PK	74.0	-16.4	3.23 V	156	35.7	21.9
8	17865.00	46.6 AV	54.0	-7.4	3.23 V	156	24.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			1.04 H	249	116.1	4.8
2	*6195.00	112.1 AV			1.04 H	249	107.3	4.8
3	12390.00	50.9 PK	74.0	-23.1	3.70 H	110	38.6	12.3
4	12390.00	38.1 AV	54.0	-15.9	3.70 H	110	25.8	12.3
5	18585.00	54.6 PK	74.0	-19.4	3.65 H	308	59.6	-5.0
6	18585.00	44.0 AV	54.0	-10.0	3.65 H	308	49.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.5 PK			3.57 V	344	113.7	4.8
2	*6195.00	109.2 AV			3.57 V	344	104.4	4.8
3	12390.00	53.9 PK	74.0	-20.1	3.85 V	310	41.6	12.3
4	12390.00	42.0 AV	54.0	-12.0	3.85 V	310	29.7	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.24 V	178	62.4	-5.0
6	18585.00	46.5 AV	54.0	-7.5	3.24 V	178	51.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			1.02 H	233	116.3	6.4
2	*6415.00	114.6 AV			1.02 H	233	108.2	6.4
3	#12830.00	50.7 PK	88.2	-37.5	3.72 H	79	37.7	13.0
4	#12830.00	39.3 AV	68.2	-28.9	3.72 H	79	26.3	13.0
5	19245.00	55.6 PK	74.0	-18.4	3.56 H	304	59.4	-3.8
6	19245.00	44.0 AV	54.0	-10.0	3.56 H	304	47.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.7 PK			3.58 V	343	112.3	6.4
2	*6415.00	109.7 AV			3.58 V	343	103.3	6.4
3	#12830.00	53.6 PK	88.2	-34.6	3.86 V	323	40.6	13.0
4	#12830.00	41.1 AV	68.2	-27.1	3.86 V	323	28.1	13.0
5	19245.00	57.5 PK	74.0	-16.5	3.24 V	173	61.3	-3.8
6	19245.00	46.6 AV	54.0	-7.4	3.24 V	173	50.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			1.11 H	69	95.1	6.4
2	*6435.00	90.5 AV			1.11 H	69	84.1	6.4
3	#12870.00	50.5 PK	88.2	-37.7	3.76 H	119	37.5	13.0
4	#12870.00	38.2 AV	68.2	-30.0	3.76 H	119	25.2	13.0
5	19305.00	55.4 PK	74.0	-18.6	3.46 H	322	59.1	-3.7
6	19305.00	44.3 AV	54.0	-9.7	3.46 H	322	48.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.7 PK			1.10 V	321	94.3	6.4
2	*6435.00	90.4 AV			1.10 V	321	84.0	6.4
3	#12870.00	53.8 PK	88.2	-34.4	3.81 V	314	40.8	13.0
4	#12870.00	41.8 AV	68.2	-26.4	3.81 V	314	28.8	13.0
5	19305.00	57.0 PK	74.0	-17.0	3.18 V	152	60.7	-3.7
6	19305.00	45.9 AV	54.0	-8.1	3.18 V	152	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.3 PK			1.00 H	243	115.7	6.6
2	*6475.00	114.3 AV			1.00 H	243	107.7	6.6
3	#12950.00	49.6 PK	88.2	-38.6	3.84 H	94	36.5	13.1
4	#12950.00	38.9 AV	68.2	-29.3	3.84 H	94	25.8	13.1
5	19425.00	54.4 PK	74.0	-19.6	3.59 H	309	58.2	-3.8
6	19425.00	44.1 AV	54.0	-9.9	3.59 H	309	47.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.6 PK			3.59 V	333	112.0	6.6
2	*6475.00	109.3 AV			3.59 V	333	102.7	6.6
3	#12950.00	53.9 PK	88.2	-34.3	3.90 V	329	40.8	13.1
4	#12950.00	41.4 AV	68.2	-26.8	3.90 V	329	28.3	13.1
5	19425.00	57.8 PK	74.0	-16.2	3.27 V	182	61.6	-3.8
6	19425.00	46.5 AV	54.0	-7.5	3.27 V	182	50.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.2 PK			1.08 H	61	94.3	6.9
2	*6515.00	90.8 AV			1.08 H	61	83.9	6.9
3	#13030.00	50.2 PK	88.2	-38.0	3.80 H	117	37.0	13.2
4	#13030.00	37.8 AV	68.2	-30.4	3.80 H	117	24.6	13.2
5	19545.00	55.1 PK	74.0	-18.9	3.54 H	334	59.2	-4.1
6	19545.00	44.0 AV	54.0	-10.0	3.54 H	334	48.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.2 PK			1.15 V	319	94.3	6.9
2	*6515.00	90.7 AV			1.15 V	319	83.8	6.9
3	#13030.00	53.3 PK	88.2	-34.9	3.91 V	309	40.1	13.2
4	#13030.00	41.1 AV	68.2	-27.1	3.91 V	309	27.9	13.2
5	19545.00	57.0 PK	74.0	-17.0	3.16 V	168	61.1	-4.1
6	19545.00	45.9 AV	54.0	-8.1	3.16 V	168	50.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.7 PK			1.07 H	248	116.8	6.9
2	*6535.00	116.1 AV			1.07 H	248	109.2	6.9
3	#13070.00	50.9 PK	88.2	-37.3	3.55 H	103	37.7	13.2
4	#13070.00	38.6 AV	68.2	-29.6	3.55 H	103	25.4	13.2
5	19605.00	56.3 PK	74.0	-17.7	3.75 H	309	60.3	-4.0
6	19605.00	44.8 AV	54.0	-9.2	3.75 H	309	48.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.4 PK			3.49 V	323	111.5	6.9
2	*6535.00	109.0 AV			3.49 V	323	102.1	6.9
3	#13070.00	53.5 PK	88.2	-34.7	3.88 V	315	40.3	13.2
4	#13070.00	41.3 AV	68.2	-26.9	3.88 V	315	28.1	13.2
5	19605.00	57.9 PK	74.0	-16.1	3.24 V	180	61.9	-4.0
6	19605.00	46.7 AV	54.0	-7.3	3.24 V	180	50.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.8 PK			1.08 H	244	115.6	7.2
2	*6695.00	113.7 AV			1.08 H	244	106.5	7.2
3	13390.00	51.6 PK	74.0	-22.4	3.66 H	114	37.6	14.0
4	13390.00	38.9 AV	54.0	-15.1	3.66 H	114	24.9	14.0
5	20085.00	55.9 PK	74.0	-18.1	3.65 H	327	59.4	-3.5
6	20085.00	44.6 AV	54.0	-9.4	3.65 H	327	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.6 PK			3.50 V	342	111.4	7.2
2	*6695.00	109.7 AV			3.50 V	342	102.5	7.2
3	13390.00	53.6 PK	74.0	-20.4	3.80 V	319	39.6	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.80 V	319	27.2	14.0
5	20085.00	57.7 PK	74.0	-16.3	3.22 V	180	61.2	-3.5
6	20085.00	46.8 AV	54.0	-7.2	3.22 V	180	50.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.2 PK			1.30 H	56	115.0	7.2
2	*6855.00	114.1 AV			1.30 H	56	106.9	7.2
3	#13710.00	51.5 PK	88.2	-36.7	3.86 H	122	36.3	15.2
4	#13710.00	39.9 AV	68.2	-28.3	3.86 H	122	24.7	15.2
5	20565.00	55.2 PK	74.0	-18.8	3.48 H	284	58.5	-3.3
6	20565.00	44.1 AV	54.0	-9.9	3.48 H	284	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			3.56 V	349	111.2	7.2
2	*6855.00	109.4 AV			3.56 V	349	102.2	7.2
3	#13710.00	53.9 PK	88.2	-34.3	3.88 V	301	38.7	15.2
4	#13710.00	41.7 AV	68.2	-26.5	3.88 V	301	26.5	15.2
5	20565.00	57.9 PK	74.0	-16.1	3.17 V	180	61.2	-3.3
6	20565.00	46.6 AV	54.0	-7.4	3.17 V	180	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.9 PK			1.19 H	353	93.7	7.2
2	*6875.00	90.5 AV			1.19 H	353	83.3	7.2
3	#13750.00	50.5 PK	88.2	-37.7	3.86 H	115	35.4	15.1
4	#13750.00	38.2 AV	68.2	-30.0	3.86 H	115	23.1	15.1
5	20625.00	55.1 PK	74.0	-18.9	3.50 H	331	58.4	-3.3
6	20625.00	44.0 AV	54.0	-10.0	3.50 H	331	47.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.4 PK			1.09 V	304	94.2	7.2
2	*6875.00	90.7 AV			1.09 V	304	83.5	7.2
3	#13750.00	53.5 PK	88.2	-34.7	3.84 V	306	38.4	15.1
4	#13750.00	41.5 AV	68.2	-26.7	3.84 V	306	26.4	15.1
5	20625.00	56.9 PK	74.0	-17.1	3.13 V	147	60.2	-3.3
6	20625.00	46.0 AV	54.0	-8.0	3.13 V	147	49.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.0 PK			1.23 H	351	93.0	8.0
2	*6995.00	90.6 AV			1.23 H	351	82.6	8.0
3	#13990.00	50.4 PK	88.2	-37.8	3.79 H	102	34.8	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.79 H	102	22.6	15.6
5	20985.00	55.7 PK	74.0	-18.3	3.54 H	323	58.5	-2.8
6	20985.00	44.4 AV	54.0	-9.6	3.54 H	323	47.2	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.4 PK			1.06 V	295	92.4	8.0
2	*6995.00	90.2 AV			1.06 V	295	82.2	8.0
3	#13990.00	54.6 PK	88.2	-33.6	3.91 V	306	39.0	15.6
4	#13990.00	42.1 AV	68.2	-26.1	3.91 V	306	26.5	15.6
5	20985.00	57.1 PK	74.0	-16.9	3.15 V	153	59.9	-2.8
6	20985.00	46.2 AV	54.0	-7.8	3.15 V	153	49.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.9 PK			1.18 H	345	91.4	9.5
2	*7115.00	90.7 AV			1.18 H	345	81.2	9.5
3	#7125.00	85.8 PK	88.2	-2.4	1.18 H	345	76.4	9.4
4	#7125.00	56.8 AV	68.2	-11.4	1.18 H	345	47.4	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.18 H	345	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.18 H	345	34.8	8.7
7	#14230.00	49.8 PK	88.2	-38.4	3.77 H	124	34.5	15.3
8	#14230.00	37.8 AV	68.2	-30.4	3.77 H	124	22.5	15.3
9	21345.00	55.1 PK	74.0	-18.9	3.55 H	330	56.7	-1.6
10	21345.00	44.2 AV	54.0	-9.8	3.55 H	330	45.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			1.10 V	311	91.5	9.5
2	*7115.00	90.6 AV			1.10 V	311	81.1	9.5
3	#7125.00	85.6 PK	88.2	-2.6	1.10 V	311	76.2	9.4
4	#7125.00	56.1 AV	68.2	-12.1	1.10 V	311	46.7	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.10 V	311	46.9	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.10 V	311	34.7	8.7
7	#14230.00	53.7 PK	88.2	-34.5	3.85 V	330	38.4	15.3
8	#14230.00	41.4 AV	68.2	-26.8	3.85 V	330	26.1	15.3
9	21345.00	57.2 PK	74.0	-16.8	3.18 V	142	58.8	-1.6
10	21345.00	46.1 AV	54.0	-7.9	3.18 V	142	47.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.0 PK	88.2	-14.2	1.07 H	244	69.7	4.3
2	#5925.00	56.1 AV	68.2	-12.1	1.07 H	244	51.8	4.3
3	*5955.00	118.6 PK			1.07 H	244	114.1	4.5
4	*5955.00	108.5 AV			1.07 H	244	104.0	4.5
5	11910.00	51.4 PK	74.0	-22.6	3.82 H	80	39.2	12.2
6	11910.00	39.3 AV	54.0	-14.7	3.82 H	80	27.1	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.64 H	310	32.9	21.9
8	17865.00	43.8 AV	54.0	-10.2	3.64 H	310	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.9 PK	88.2	-21.3	3.38 V	342	62.6	4.3
2	#5925.00	51.4 AV	68.2	-16.8	3.38 V	342	47.1	4.3
3	*5955.00	117.8 PK			3.38 V	342	113.3	4.5
4	*5955.00	106.8 AV			3.38 V	342	102.3	4.5
5	11910.00	53.5 PK	74.0	-20.5	3.89 V	329	41.3	12.2
6	11910.00	41.2 AV	54.0	-12.8	3.89 V	329	29.0	12.2
7	17865.00	57.7 PK	74.0	-16.3	3.20 V	163	35.8	21.9
8	17865.00	46.7 AV	54.0	-7.3	3.20 V	163	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.09 H	253	114.7	4.8
2	*6195.00	110.1 AV			1.09 H	253	105.3	4.8
3	12390.00	50.8 PK	74.0	-23.2	3.62 H	86	38.5	12.3
4	12390.00	38.9 AV	54.0	-15.1	3.62 H	86	26.6	12.3
5	18585.00	56.6 PK	74.0	-17.4	3.52 H	298	61.6	-5.0
6	18585.00	44.0 AV	54.0	-10.0	3.52 H	298	49.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.8 PK			3.38 V	337	113.0	4.8
2	*6195.00	106.6 AV			3.38 V	337	101.8	4.8
3	12390.00	54.2 PK	74.0	-19.8	3.92 V	316	41.9	12.3
4	12390.00	41.9 AV	54.0	-12.1	3.92 V	316	29.6	12.3
5	18585.00	57.5 PK	74.0	-16.5	3.26 V	161	62.5	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.26 V	161	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			1.03 H	258	113.9	6.4
2	*6415.00	112.4 AV			1.03 H	258	106.0	6.4
3	#12830.00	50.8 PK	88.2	-37.4	3.63 H	77	37.8	13.0
4	#12830.00	38.7 AV	68.2	-29.5	3.63 H	77	25.7	13.0
5	19245.00	54.6 PK	74.0	-19.4	3.78 H	305	58.4	-3.8
6	19245.00	43.4 AV	54.0	-10.6	3.78 H	305	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			3.39 V	358	110.8	6.4
2	*6415.00	106.3 AV			3.39 V	358	99.9	6.4
3	#12830.00	53.8 PK	88.2	-34.4	3.86 V	325	40.8	13.0
4	#12830.00	41.3 AV	68.2	-26.9	3.86 V	325	28.3	13.0
5	19245.00	57.9 PK	74.0	-16.1	3.20 V	158	61.7	-3.8
6	19245.00	46.7 AV	54.0	-7.3	3.20 V	158	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.5 PK			1.15 H	68	96.1	6.4
2	*6435.00	91.5 AV			1.15 H	68	85.1	6.4
3	#12870.00	50.6 PK	88.2	-37.6	3.76 H	110	37.6	13.0
4	#12870.00	38.3 AV	68.2	-29.9	3.76 H	110	25.3	13.0
5	19305.00	55.1 PK	74.0	-18.9	3.54 H	313	58.8	-3.7
6	19305.00	43.8 AV	54.0	-10.2	3.54 H	313	47.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			1.23 V	285	95.1	6.4
2	*6435.00	90.7 AV			1.23 V	285	84.3	6.4
3	#12870.00	53.5 PK	88.2	-34.7	3.82 V	305	40.5	13.0
4	#12870.00	41.1 AV	68.2	-27.1	3.82 V	305	28.1	13.0
5	19305.00	56.9 PK	74.0	-17.1	3.19 V	155	60.6	-3.7
6	19305.00	46.2 AV	54.0	-7.8	3.19 V	155	49.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.6 PK			1.02 H	246	113.0	6.6
2	*6475.00	112.1 AV			1.02 H	246	105.5	6.6
3	#12950.00	50.4 PK	88.2	-37.8	3.74 H	106	37.3	13.1
4	#12950.00	39.8 AV	68.2	-28.4	3.74 H	106	26.7	13.1
5	19425.00	55.0 PK	74.0	-19.0	3.60 H	323	58.8	-3.8
6	19425.00	44.9 AV	54.0	-9.1	3.60 H	323	48.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.1 PK			3.36 V	344	111.5	6.6
2	*6475.00	107.2 AV			3.36 V	344	100.6	6.6
3	#12950.00	53.9 PK	88.2	-34.3	3.85 V	311	40.8	13.1
4	#12950.00	41.9 AV	68.2	-26.3	3.85 V	311	28.8	13.1
5	19425.00	57.6 PK	74.0	-16.4	3.20 V	167	61.4	-3.8
6	19425.00	46.5 AV	54.0	-7.5	3.20 V	167	50.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.2 PK			1.07 H	51	95.3	6.9
2	*6515.00	91.4 AV			1.07 H	51	84.5	6.9
3	#13030.00	50.8 PK	88.2	-37.4	3.74 H	128	37.6	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.74 H	128	25.5	13.2
5	19545.00	55.1 PK	74.0	-18.9	3.48 H	310	59.2	-4.1
6	19545.00	43.8 AV	54.0	-10.2	3.48 H	310	47.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.9 PK			1.26 V	273	95.0	6.9
2	*6515.00	90.9 AV			1.26 V	273	84.0	6.9
3	#13030.00	54.2 PK	88.2	-34.0	3.81 V	325	41.0	13.2
4	#13030.00	41.9 AV	68.2	-26.3	3.81 V	325	28.7	13.2
5	19545.00	57.0 PK	74.0	-17.0	3.13 V	141	61.1	-4.1
6	19545.00	46.1 AV	54.0	-7.9	3.13 V	141	50.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			1.05 H	247	114.7	6.9
2	*6535.00	114.2 AV			1.05 H	247	107.3	6.9
3	#13070.00	50.1 PK	88.2	-38.1	3.79 H	113	36.9	13.2
4	#13070.00	39.1 AV	68.2	-29.1	3.79 H	113	25.9	13.2
5	19605.00	55.6 PK	74.0	-18.4	3.70 H	322	59.6	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.70 H	322	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.7 PK			3.32 V	347	110.8	6.9
2	*6535.00	106.6 AV			3.32 V	347	99.7	6.9
3	#13070.00	54.0 PK	88.2	-34.2	3.88 V	305	40.8	13.2
4	#13070.00	41.6 AV	68.2	-26.6	3.88 V	305	28.4	13.2
5	19605.00	58.1 PK	74.0	-15.9	3.20 V	178	62.1	-4.0
6	19605.00	46.8 AV	54.0	-7.2	3.20 V	178	50.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.5 PK			1.07 H	240	113.3	7.2
2	*6695.00	112.1 AV			1.07 H	240	104.9	7.2
3	13390.00	49.7 PK	74.0	-24.3	3.70 H	87	35.7	14.0
4	13390.00	39.6 AV	54.0	-14.4	3.70 H	87	25.6	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.63 H	325	58.8	-3.5
6	20085.00	45.3 AV	54.0	-8.7	3.63 H	325	48.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.7 PK			3.40 V	341	110.5	7.2
2	*6695.00	106.9 AV			3.40 V	341	99.7	7.2
3	13390.00	53.7 PK	74.0	-20.3	3.87 V	316	39.7	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.87 V	316	27.2	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.20 V	158	61.0	-3.5
6	20085.00	46.6 AV	54.0	-7.4	3.20 V	158	50.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.7 PK			1.31 H	55	113.5	7.2
2	*6855.00	111.3 AV			1.31 H	55	104.1	7.2
3	#13710.00	51.0 PK	88.2	-37.2	3.86 H	90	35.8	15.2
4	#13710.00	39.1 AV	68.2	-29.1	3.86 H	90	23.9	15.2
5	20565.00	55.5 PK	74.0	-18.5	3.65 H	335	58.8	-3.3
6	20565.00	44.7 AV	54.0	-9.3	3.65 H	335	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.3 PK			3.33 V	329	110.1	7.2
2	*6855.00	106.6 AV			3.33 V	329	99.4	7.2
3	#13710.00	53.6 PK	88.2	-34.6	3.85 V	329	38.4	15.2
4	#13710.00	41.2 AV	68.2	-27.0	3.85 V	329	26.0	15.2
5	20565.00	58.1 PK	74.0	-15.9	3.18 V	181	61.4	-3.3
6	20565.00	47.1 AV	54.0	-6.9	3.18 V	181	50.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			1.10 H	59	95.2	7.2
2	*6875.00	91.3 AV			1.10 H	59	84.1	7.2
3	#13750.00	51.1 PK	88.2	-37.1	3.75 H	125	36.0	15.1
4	#13750.00	38.7 AV	68.2	-29.5	3.75 H	125	23.6	15.1
5	20625.00	55.6 PK	74.0	-18.4	3.45 H	334	58.9	-3.3
6	20625.00	44.4 AV	54.0	-9.6	3.45 H	334	47.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.2 PK			1.23 V	286	95.0	7.2
2	*6875.00	91.1 AV			1.23 V	286	83.9	7.2
3	#13750.00	53.4 PK	88.2	-34.8	3.88 V	327	38.3	15.1
4	#13750.00	41.3 AV	68.2	-26.9	3.88 V	327	26.2	15.1
5	20625.00	57.2 PK	74.0	-16.8	3.21 V	143	60.5	-3.3
6	20625.00	46.1 AV	54.0	-7.9	3.21 V	143	49.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.1 PK			1.12 H	52	94.1	8.0
2	*6995.00	91.0 AV			1.12 H	52	83.0	8.0
3	#13990.00	50.3 PK	88.2	-37.9	3.75 H	104	34.7	15.6
4	#13990.00	38.3 AV	68.2	-29.9	3.75 H	104	22.7	15.6
5	20985.00	55.5 PK	74.0	-18.5	3.56 H	316	58.3	-2.8
6	20985.00	44.2 AV	54.0	-9.8	3.56 H	316	47.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.3 PK			1.11 V	324	94.3	8.0
2	*6995.00	91.2 AV			1.11 V	324	83.2	8.0
3	#13990.00	54.4 PK	88.2	-33.8	3.86 V	312	38.8	15.6
4	#13990.00	42.0 AV	68.2	-26.2	3.86 V	312	26.4	15.6
5	20985.00	57.6 PK	74.0	-16.4	3.17 V	141	60.4	-2.8
6	20985.00	46.7 AV	54.0	-7.3	3.17 V	141	49.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.2 PK			1.19 H	346	90.7	9.5
2	*7115.00	89.3 AV			1.19 H	346	79.8	9.5
3	#7125.00	86.0 PK	88.2	-2.2	1.19 H	346	76.6	9.4
4	#7125.00	56.0 AV	68.2	-12.2	1.19 H	346	46.6	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.19 H	346	46.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.19 H	346	34.8	8.7
7	#14230.00	50.5 PK	88.2	-37.7	3.79 H	112	35.2	15.3
8	#14230.00	37.9 AV	68.2	-30.3	3.79 H	112	22.6	15.3
9	21345.00	55.5 PK	74.0	-18.5	3.50 H	306	57.1	-1.6
10	21345.00	44.2 AV	54.0	-9.8	3.50 H	306	45.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			1.12 V	315	90.9	9.5
2	*7115.00	89.3 AV			1.12 V	315	79.8	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.12 V	315	77.1	9.4
4	#7125.00	56.0 AV	68.2	-12.2	1.12 V	315	46.6	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.12 V	315	46.2	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.12 V	315	34.7	8.7
7	#14230.00	53.6 PK	88.2	-34.6	3.85 V	324	38.3	15.3
8	#14230.00	41.5 AV	68.2	-26.7	3.85 V	324	26.2	15.3
9	21345.00	56.8 PK	74.0	-17.2	3.25 V	141	58.4	-1.6
10	21345.00	46.0 AV	54.0	-8.0	3.25 V	141	47.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.1 PK	88.2	-15.1	1.08 H	245	68.8	4.3
2	#5925.00	49.9 AV	68.2	-18.3	1.08 H	245	45.6	4.3
3	*5955.00	120.2 PK			1.08 H	245	115.7	4.5
4	*5955.00	109.3 AV			1.08 H	245	104.8	4.5
5	11910.00	50.8 PK	74.0	-23.2	3.63 H	109	38.6	12.2
6	11910.00	39.0 AV	54.0	-15.0	3.63 H	109	26.8	12.2
7	17865.00	55.0 PK	74.0	-19.0	3.77 H	304	33.1	21.9
8	17865.00	44.6 AV	54.0	-9.4	3.77 H	304	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.3 PK	88.2	-17.9	3.51 V	346	66.0	4.3
2	#5925.00	48.6 AV	68.2	-19.6	3.51 V	346	44.3	4.3
3	*5955.00	118.7 PK			3.51 V	346	114.2	4.5
4	*5955.00	108.5 AV			3.51 V	346	104.0	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.85 V	314	41.6	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.85 V	314	29.6	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.23 V	169	35.3	21.9
8	17865.00	46.4 AV	54.0	-7.6	3.23 V	169	24.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.1 PK			1.10 H	25	96.5	6.6
2	*6475.00	91.9 AV			1.10 H	25	85.3	6.6
3	#12950.00	49.9 PK	88.2	-38.3	3.78 H	114	36.8	13.1
4	#12950.00	37.7 AV	68.2	-30.5	3.78 H	114	24.6	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.48 H	342	59.2	-3.8
6	19425.00	44.4 AV	54.0	-9.6	3.48 H	342	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.5 PK			1.13 V	320	94.9	6.6
2	*6475.00	91.6 AV			1.13 V	320	85.0	6.6
3	#12950.00	54.1 PK	88.2	-34.1	3.93 V	315	41.0	13.1
4	#12950.00	41.8 AV	68.2	-26.4	3.93 V	315	28.7	13.1
5	19425.00	56.5 PK	74.0	-17.5	3.25 V	148	60.3	-3.8
6	19425.00	45.7 AV	54.0	-8.3	3.25 V	148	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.1 PK			1.13 H	30	95.9	7.2
2	*6695.00	92.1 AV			1.13 H	30	84.9	7.2
3	13390.00	49.9 PK	74.0	-24.1	3.81 H	114	35.9	14.0
4	13390.00	37.4 AV	54.0	-16.6	3.81 H	114	23.4	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.46 H	354	58.8	-3.5
6	20085.00	44.5 AV	54.0	-9.5	3.46 H	354	48.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	101.3 PK			1.17 V	312	94.1	7.2
2	*6695.00	91.6 AV			1.17 V	312	84.4	7.2
3	13390.00	53.6 PK	74.0	-20.4	3.89 V	307	39.6	14.0
4	13390.00	41.3 AV	54.0	-12.7	3.89 V	307	27.3	14.0
5	20085.00	56.9 PK	74.0	-17.1	3.26 V	150	60.4	-3.5
6	20085.00	46.0 AV	54.0	-8.0	3.26 V	150	49.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.0 PK			1.12 H	19	93.5	9.5
2	*7115.00	91.9 AV			1.12 H	19	82.4	9.5
3	#7125.00	69.4 PK	88.2	-18.8	1.12 H	19	60.0	9.4
4	#7125.00	45.9 AV	68.2	-22.3	1.12 H	19	36.5	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.12 H	19	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.12 H	19	34.7	8.7
7	#14230.00	50.0 PK	88.2	-38.2	3.76 H	104	34.7	15.3
8	#14230.00	37.9 AV	68.2	-30.3	3.76 H	104	22.6	15.3
9	21345.00	55.5 PK	74.0	-18.5	3.51 H	335	57.1	-1.6
10	21345.00	44.3 AV	54.0	-9.7	3.51 H	335	45.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.4 PK			1.11 V	312	91.9	9.5
2	*7115.00	91.4 AV			1.11 V	312	81.9	9.5
3	#7125.00	58.3 PK	88.2	-29.9	1.11 V	312	48.9	9.4
4	#7125.00	46.5 AV	68.2	-21.7	1.11 V	312	37.1	9.4
5	7250.00	54.5 PK	74.0	-19.5	1.11 V	312	45.8	8.7
6	7250.00	43.2 AV	54.0	-10.8	1.11 V	312	34.5	8.7
7	#14230.00	54.0 PK	88.2	-34.2	3.88 V	329	38.7	15.3
8	#14230.00	41.9 AV	68.2	-26.3	3.88 V	329	26.6	15.3
9	21345.00	56.9 PK	74.0	-17.1	3.22 V	152	58.5	-1.6
10	21345.00	46.1 AV	54.0	-7.9	3.22 V	152	47.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.06 H	244	69.4	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.06 H	244	53.6	4.3
3	*5955.00	117.8 PK			1.06 H	244	113.3	4.5
4	*5955.00	107.0 AV			1.06 H	244	102.5	4.5
5	11910.00	50.4 PK	74.0	-23.6	3.82 H	94	38.2	12.2
6	11910.00	39.2 AV	54.0	-14.8	3.82 H	94	27.0	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.43 H	343	32.9	21.9
8	17865.00	43.9 AV	54.0	-10.1	3.43 H	343	22.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	3.51 V	345	63.7	4.3
2	#5925.00	53.3 AV	68.2	-14.9	3.51 V	345	49.0	4.3
3	*5955.00	116.5 PK			3.51 V	345	112.0	4.5
4	*5955.00	105.6 AV			3.51 V	345	101.1	4.5
5	11910.00	53.5 PK	74.0	-20.5	3.90 V	311	41.3	12.2
6	11910.00	41.2 AV	54.0	-12.8	3.90 V	311	29.0	12.2
7	17865.00	58.0 PK	74.0	-16.0	3.24 V	166	36.1	21.9
8	17865.00	47.2 AV	54.0	-6.8	3.24 V	166	25.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.2 PK			1.22 H	342	93.6	6.6
2	*6475.00	89.1 AV			1.22 H	342	82.5	6.6
3	#12950.00	50.8 PK	88.2	-37.4	3.84 H	95	37.7	13.1
4	#12950.00	38.4 AV	68.2	-29.8	3.84 H	95	25.3	13.1
5	19425.00	55.8 PK	74.0	-18.2	3.48 H	327	59.6	-3.8
6	19425.00	44.5 AV	54.0	-9.5	3.48 H	327	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	99.8 PK			1.11 V	283	93.2	6.6
2	*6475.00	88.5 AV			1.11 V	283	81.9	6.6
3	#12950.00	55.0 PK	88.2	-33.2	3.88 V	318	41.9	13.1
4	#12950.00	42.2 AV	68.2	-26.0	3.88 V	318	29.1	13.1
5	19425.00	57.4 PK	74.0	-16.6	3.22 V	159	61.2	-3.8
6	19425.00	46.1 AV	54.0	-7.9	3.22 V	159	49.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	100.6 PK			1.21 H	339	93.4	7.2
2	*6695.00	89.3 AV			1.21 H	339	82.1	7.2
3	13390.00	50.4 PK	74.0	-23.6	3.82 H	86	36.4	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.82 H	86	24.0	14.0
5	20085.00	56.0 PK	74.0	-18.0	3.51 H	336	59.5	-3.5
6	20085.00	44.4 AV	54.0	-9.6	3.51 H	336	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	99.7 PK			1.07 V	271	92.5	7.2
2	*6695.00	88.5 AV			1.07 V	271	81.3	7.2
3	13390.00	55.1 PK	74.0	-18.9	3.86 V	308	41.1	14.0
4	13390.00	42.0 AV	54.0	-12.0	3.86 V	308	28.0	14.0
5	20085.00	57.9 PK	74.0	-16.1	3.19 V	169	61.4	-3.5
6	20085.00	46.3 AV	54.0	-7.7	3.19 V	169	49.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.6 PK			1.19 H	347	90.1	9.5
2	*7115.00	88.7 AV			1.19 H	347	79.2	9.5
3	#7125.00	85.8 PK	88.2	-2.4	1.19 H	347	76.4	9.4
4	#7125.00	55.2 AV	68.2	-13.0	1.19 H	347	45.8	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.19 H	347	46.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.19 H	347	34.8	8.7
7	#14230.00	50.6 PK	88.2	-37.6	3.85 H	99	35.3	15.3
8	#14230.00	38.1 AV	68.2	-30.1	3.85 H	99	22.8	15.3
9	21345.00	55.8 PK	74.0	-18.2	3.49 H	313	57.4	-1.6
10	21345.00	44.6 AV	54.0	-9.4	3.49 H	313	46.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.1 PK			1.14 V	297	90.6	9.5
2	*7115.00	88.8 AV			1.14 V	297	79.3	9.5
3	#7125.00	86.3 PK	88.2	-1.9	1.14 V	297	76.9	9.4
4	#7125.00	55.5 AV	68.2	-12.7	1.14 V	297	46.1	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.14 V	297	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.14 V	297	34.8	8.7
7	#14230.00	54.5 PK	88.2	-33.7	3.88 V	320	39.2	15.3
8	#14230.00	41.9 AV	68.2	-26.3	3.88 V	320	26.6	15.3
9	21345.00	57.3 PK	74.0	-16.7	3.23 V	146	58.9	-1.6
10	21345.00	46.3 AV	54.0	-7.7	3.23 V	146	47.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	1.07 H	245	74.9	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.07 H	245	62.3	4.3
3	*5985.00	110.4 PK			1.07 H	245	106.0	4.4
4	*5985.00	98.1 AV			1.07 H	245	93.7	4.4
5	11970.00	50.3 PK	74.0	-23.7	3.62 H	102	38.1	12.2
6	11970.00	39.4 AV	54.0	-14.6	3.62 H	102	27.2	12.2
7	17955.00	55.7 PK	74.0	-18.3	3.69 H	309	32.3	23.4
8	17955.00	43.8 AV	54.0	-10.2	3.69 H	309	20.4	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	3.32 V	337	69.3	4.3
2	#5925.00	59.6 AV	68.2	-8.6	3.32 V	337	55.3	4.3
3	*5985.00	106.1 PK			3.32 V	337	101.7	4.4
4	*5985.00	95.1 AV			3.32 V	337	90.7	4.4
5	11970.00	53.2 PK	74.0	-20.8	3.90 V	311	41.0	12.2
6	11970.00	41.2 AV	54.0	-12.8	3.90 V	311	29.0	12.2
7	17955.00	57.4 PK	74.0	-16.6	3.19 V	186	34.0	23.4
8	17955.00	46.3 AV	54.0	-7.7	3.19 V	186	22.9	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.5 PK			1.06 H	32	97.0	6.5
2	*6465.00	90.9 AV			1.06 H	32	84.4	6.5
3	#12930.00	51.5 PK	88.2	-36.7	3.82 H	123	38.4	13.1
4	#12930.00	38.9 AV	68.2	-29.3	3.82 H	123	25.8	13.1
5	19395.00	55.6 PK	74.0	-18.4	3.55 H	344	59.3	-3.7
6	19395.00	44.0 AV	54.0	-10.0	3.55 H	344	47.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.1 PK			1.15 V	286	96.6	6.5
2	*6465.00	90.4 AV			1.15 V	286	83.9	6.5
3	#12930.00	53.5 PK	88.2	-34.7	3.96 V	305	40.4	13.1
4	#12930.00	41.2 AV	68.2	-27.0	3.96 V	305	28.1	13.1
5	19395.00	57.0 PK	74.0	-17.0	3.20 V	153	60.7	-3.7
6	19395.00	46.5 AV	54.0	-7.5	3.20 V	153	50.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.9 PK			1.06 H	30	96.7	7.2
2	*6705.00	91.1 AV			1.06 H	30	83.9	7.2
3	#13410.00	52.0 PK	88.2	-36.2	3.86 H	114	37.8	14.2
4	#13410.00	39.3 AV	68.2	-28.9	3.86 H	114	25.1	14.2
5	20115.00	55.5 PK	74.0	-18.5	3.50 H	338	59.0	-3.5
6	20115.00	43.8 AV	54.0	-10.2	3.50 H	338	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.0 PK			1.20 V	299	95.8	7.2
2	*6705.00	90.5 AV			1.20 V	299	83.3	7.2
3	#13410.00	53.8 PK	88.2	-34.4	3.97 V	306	39.6	14.2
4	#13410.00	41.6 AV	68.2	-26.6	3.97 V	306	27.4	14.2
5	20115.00	56.9 PK	74.0	-17.1	3.17 V	145	60.4	-3.5
6	20115.00	46.4 AV	54.0	-7.6	3.17 V	145	49.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.4 PK			1.06 H	25	95.0	8.4
2	*7025.00	90.7 AV			1.06 H	25	82.3	8.4
3	#7125.00	59.5 PK	88.2	-28.7	1.06 H	25	50.1	9.4
4	#7125.00	46.1 AV	68.2	-22.1	1.06 H	25	36.7	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.06 H	25	46.7	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.06 H	25	34.7	8.7
7	#14050.00	51.1 PK	88.2	-37.1	3.83 H	126	35.6	15.5
8	#14050.00	38.6 AV	68.2	-29.6	3.83 H	126	23.1	15.5
9	21075.00	55.5 PK	74.0	-18.5	3.54 H	336	57.7	-2.2
10	21075.00	44.2 AV	54.0	-9.8	3.54 H	336	46.4	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.1 PK			1.10 V	297	94.7	8.4
2	*7025.00	90.6 AV			1.10 V	297	82.2	8.4
3	#7125.00	59.1 PK	88.2	-29.1	1.10 V	297	49.7	9.4
4	#7125.00	46.6 AV	68.2	-21.6	1.10 V	297	37.2	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.10 V	297	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.10 V	297	34.8	8.7
7	#14050.00	54.0 PK	88.2	-34.2	3.91 V	315	38.5	15.5
8	#14050.00	41.6 AV	68.2	-26.6	3.91 V	315	26.1	15.5
9	21075.00	57.5 PK	74.0	-16.5	3.21 V	155	59.7	-2.2
10	21075.00	46.8 AV	54.0	-7.2	3.21 V	155	49.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	3.61 H	89	72.9	4.3
2	#5925.00	62.5 AV	68.2	-5.7	3.61 H	89	58.2	4.3
3	*6025.00	107.3 PK			3.61 H	89	103.1	4.2
4	*6025.00	94.9 AV			3.61 H	89	90.7	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.80 H	105	38.4	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.80 H	105	26.4	12.4
7	18075.00	56.1 PK	74.0	-17.9	3.50 H	323	60.8	-4.7
8	18075.00	44.8 AV	54.0	-9.2	3.50 H	323	49.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.8 PK	88.2	-16.4	3.47 V	340	67.5	4.3
2	#5925.00	56.1 AV	68.2	-12.1	3.47 V	340	51.8	4.3
3	*6025.00	103.7 PK			3.47 V	340	99.5	4.2
4	*6025.00	92.0 AV			3.47 V	340	87.8	4.2
5	12050.00	53.9 PK	74.0	-20.1	3.88 V	327	41.5	12.4
6	12050.00	41.5 AV	54.0	-12.5	3.88 V	327	29.1	12.4
7	18075.00	58.4 PK	74.0	-15.6	3.20 V	172	63.1	-4.7
8	18075.00	47.3 AV	54.0	-6.7	3.20 V	172	52.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.0 PK			1.17 H	12	96.2	6.8
2	*6505.00	90.9 AV			1.17 H	12	84.1	6.8
3	#13010.00	51.2 PK	88.2	-37.0	3.75 H	110	38.0	13.2
4	#13010.00	38.4 AV	68.2	-29.8	3.75 H	110	25.2	13.2
5	19515.00	55.6 PK	74.0	-18.4	3.60 H	351	59.7	-4.1
6	19515.00	44.3 AV	54.0	-9.7	3.60 H	351	48.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.0 PK			2.93 V	100	96.2	6.8
2	*6505.00	90.7 AV			2.93 V	100	83.9	6.8
3	#13010.00	54.0 PK	88.2	-34.2	3.82 V	294	40.8	13.2
4	#13010.00	41.6 AV	68.2	-26.6	3.82 V	294	28.4	13.2
5	19515.00	57.9 PK	74.0	-16.1	3.16 V	140	62.0	-4.1
6	19515.00	46.8 AV	54.0	-7.2	3.16 V	140	50.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.5 PK			1.17 H	1	96.3	7.2
2	*6665.00	91.3 AV			1.17 H	1	84.1	7.2
3	13330.00	51.1 PK	74.0	-22.9	3.80 H	116	37.3	13.8
4	13330.00	38.4 AV	54.0	-15.6	3.80 H	116	24.6	13.8
5	19995.00	55.7 PK	74.0	-18.3	3.56 H	338	59.3	-3.6
6	19995.00	44.1 AV	54.0	-9.9	3.56 H	338	47.7	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.9 PK			2.94 V	96	95.7	7.2
2	*6665.00	90.5 AV			2.94 V	96	83.3	7.2
3	13330.00	53.9 PK	74.0	-20.1	3.81 V	290	40.1	13.8
4	13330.00	41.6 AV	54.0	-12.4	3.81 V	290	27.8	13.8
5	19995.00	57.8 PK	74.0	-16.2	3.17 V	148	61.4	-3.6
6	19995.00	46.5 AV	54.0	-7.5	3.17 V	148	50.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.5 PK			1.17 H	18	95.7	7.8
2	*6985.00	91.3 AV			1.17 H	18	83.5	7.8
3	#7125.00	74.0 PK	88.2	-14.2	1.17 H	18	64.6	9.4
4	#7125.00	55.7 AV	68.2	-12.5	1.17 H	18	46.3	9.4
5	7250.00	57.5 PK	74.0	-16.5	1.17 H	18	48.8	8.7
6	7250.00	45.3 AV	54.0	-8.7	1.17 H	18	36.6	8.7
7	#13970.00	51.3 PK	88.2	-36.9	3.78 H	122	35.8	15.5
8	#13970.00	38.6 AV	68.2	-29.6	3.78 H	122	23.1	15.5
9	20955.00	55.6 PK	74.0	-18.4	3.55 H	348	58.3	-2.7
10	20955.00	44.1 AV	54.0	-9.9	3.55 H	348	46.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.4 PK			2.98 V	111	95.6	7.8
2	*6985.00	90.8 AV			2.98 V	111	83.0	7.8
3	#7125.00	73.2 PK	88.2	-15.0	2.98 V	111	63.8	9.4
4	#7125.00	55.2 AV	68.2	-13.0	2.98 V	111	45.8	9.4
5	7250.00	58.0 PK	74.0	-16.0	2.98 V	111	49.3	8.7
6	7250.00	44.7 AV	54.0	-9.3	2.98 V	111	36.0	8.7
7	#13970.00	54.0 PK	88.2	-34.2	3.82 V	309	38.5	15.5
8	#13970.00	41.6 AV	68.2	-26.6	3.82 V	309	26.1	15.5
9	20955.00	57.7 PK	74.0	-16.3	3.13 V	148	60.4	-2.7
10	20955.00	46.7 AV	54.0	-7.3	3.13 V	148	49.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.2 PK	88.2	-7.0	3.61 H	91	76.9	4.3
2	#5925.00	64.7 AV	68.2	-3.5	3.61 H	91	60.4	4.3
3	*6025.00	106.3 PK			3.61 H	91	102.1	4.2
4	*6025.00	94.7 AV			3.61 H	91	90.5	4.2
5	12050.00	50.7 PK	74.0	-23.3	3.83 H	115	38.3	12.4
6	12050.00	38.3 AV	54.0	-15.7	3.83 H	115	25.9	12.4
7	18075.00	56.0 PK	74.0	-18.0	3.60 H	332	60.7	-4.7
8	18075.00	44.6 AV	54.0	-9.4	3.60 H	332	49.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.1 PK	88.2	-15.1	3.48 V	342	68.8	4.3
2	#5925.00	58.0 AV	68.2	-10.2	3.48 V	342	53.7	4.3
3	*6025.00	103.0 PK			3.48 V	342	98.8	4.2
4	*6025.00	91.2 AV			3.48 V	342	87.0	4.2
5	12050.00	53.3 PK	74.0	-20.7	3.92 V	314	40.9	12.4
6	12050.00	41.2 AV	54.0	-12.8	3.92 V	314	28.8	12.4
7	18075.00	58.2 PK	74.0	-15.8	3.21 V	171	62.9	-4.7
8	18075.00	47.2 AV	54.0	-6.8	3.21 V	171	51.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.4 PK			1.08 H	20	96.6	6.8
2	*6505.00	91.0 AV			1.08 H	20	84.2	6.8
3	#13010.00	51.4 PK	88.2	-36.8	3.90 H	131	38.2	13.2
4	#13010.00	38.6 AV	68.2	-29.6	3.90 H	131	25.4	13.2
5	19515.00	55.8 PK	74.0	-18.2	3.50 H	329	59.9	-4.1
6	19515.00	44.5 AV	54.0	-9.5	3.50 H	329	48.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.6 PK			1.22 V	290	94.8	6.8
2	*6505.00	89.7 AV			1.22 V	290	82.9	6.8
3	#13010.00	53.8 PK	88.2	-34.4	3.83 V	294	40.6	13.2
4	#13010.00	41.6 AV	68.2	-26.6	3.83 V	294	28.4	13.2
5	19515.00	57.1 PK	74.0	-16.9	3.21 V	164	61.2	-4.1
6	19515.00	46.6 AV	54.0	-7.4	3.21 V	164	50.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.3 PK			1.13 H	16	96.1	7.2
2	*6665.00	91.0 AV			1.13 H	16	83.8	7.2
3	13330.00	51.4 PK	74.0	-22.6	3.91 H	137	37.6	13.8
4	13330.00	38.6 AV	54.0	-15.4	3.91 H	137	24.8	13.8
5	19995.00	56.0 PK	74.0	-18.0	3.53 H	333	59.6	-3.6
6	19995.00	44.9 AV	54.0	-9.1	3.53 H	333	48.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.8 PK			1.24 V	295	94.6	7.2
2	*6665.00	90.0 AV			1.24 V	295	82.8	7.2
3	13330.00	54.4 PK	74.0	-19.6	3.87 V	279	40.6	13.8
4	13330.00	41.9 AV	54.0	-12.1	3.87 V	279	28.1	13.8
5	19995.00	56.8 PK	74.0	-17.2	3.15 V	164	60.4	-3.6
6	19995.00	46.2 AV	54.0	-7.8	3.15 V	164	49.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.4 PK			1.12 H	29	95.6	7.8
2	*6985.00	91.0 AV			1.12 H	29	83.2	7.8
3	#7125.00	75.2 PK	88.2	-13.0	1.12 H	29	65.8	9.4
4	#7125.00	60.7 AV	68.2	-7.5	1.12 H	29	51.3	9.4
5	7250.00	59.3 PK	74.0	-14.7	1.12 H	29	50.6	8.7
6	7250.00	45.9 AV	54.0	-8.1	1.12 H	29	37.2	8.7
7	#13970.00	51.4 PK	88.2	-36.8	3.88 H	128	35.9	15.5
8	#13970.00	38.8 AV	68.2	-29.4	3.88 H	128	23.3	15.5
9	20955.00	55.9 PK	74.0	-18.1	3.52 H	331	58.6	-2.7
10	20955.00	44.6 AV	54.0	-9.4	3.52 H	331	47.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.5 PK			1.24 V	286	93.7	7.8
2	*6985.00	89.8 AV			1.24 V	286	82.0	7.8
3	#7125.00	72.5 PK	88.2	-15.7	1.24 V	286	63.1	9.4
4	#7125.00	58.1 AV	68.2	-10.1	1.24 V	286	48.7	9.4
5	7250.00	58.3 PK	74.0	-15.7	1.24 V	286	49.6	8.7
6	7250.00	45.0 AV	54.0	-9.0	1.24 V	286	36.3	8.7
7	#13970.00	53.6 PK	88.2	-34.6	3.84 V	306	38.1	15.5
8	#13970.00	41.2 AV	68.2	-27.0	3.84 V	306	25.7	15.5
9	20955.00	57.0 PK	74.0	-17.0	3.15 V	163	59.7	-2.7
10	20955.00	46.4 AV	54.0	-7.6	3.15 V	163	49.1	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode B

1Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

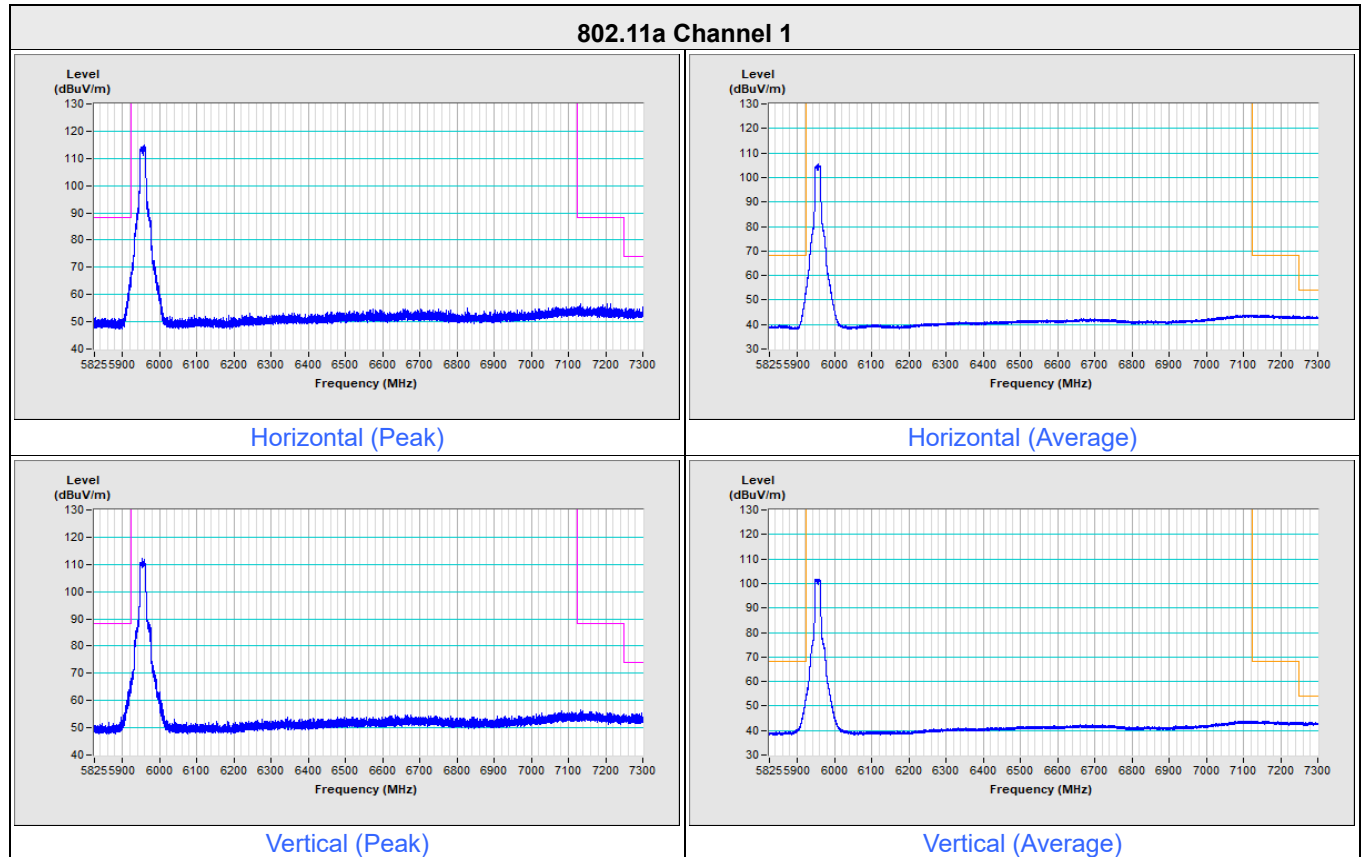


802.11a Channel 233

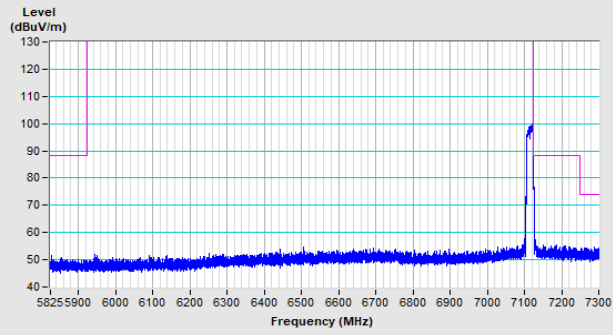


Horizontal (Peak)

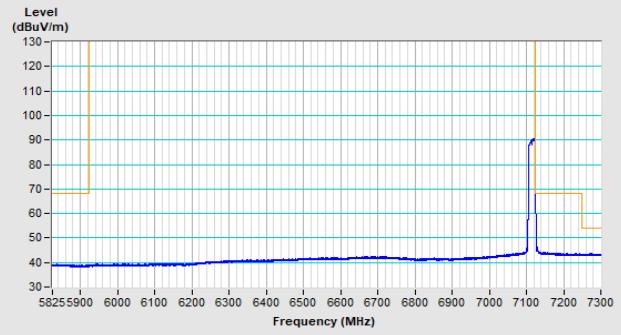

Horizontal (Average)

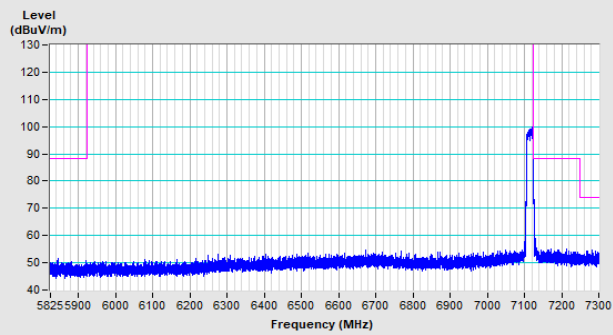

Vertical (Peak)

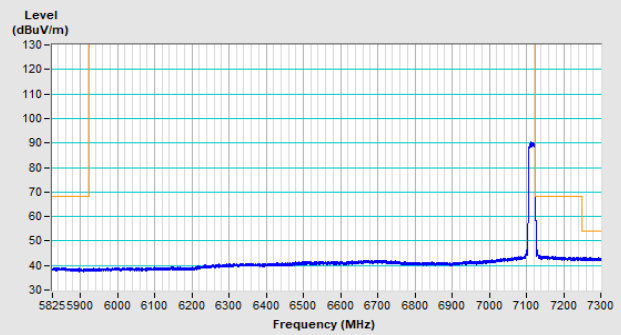


Vertical (Average)


1Tx NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

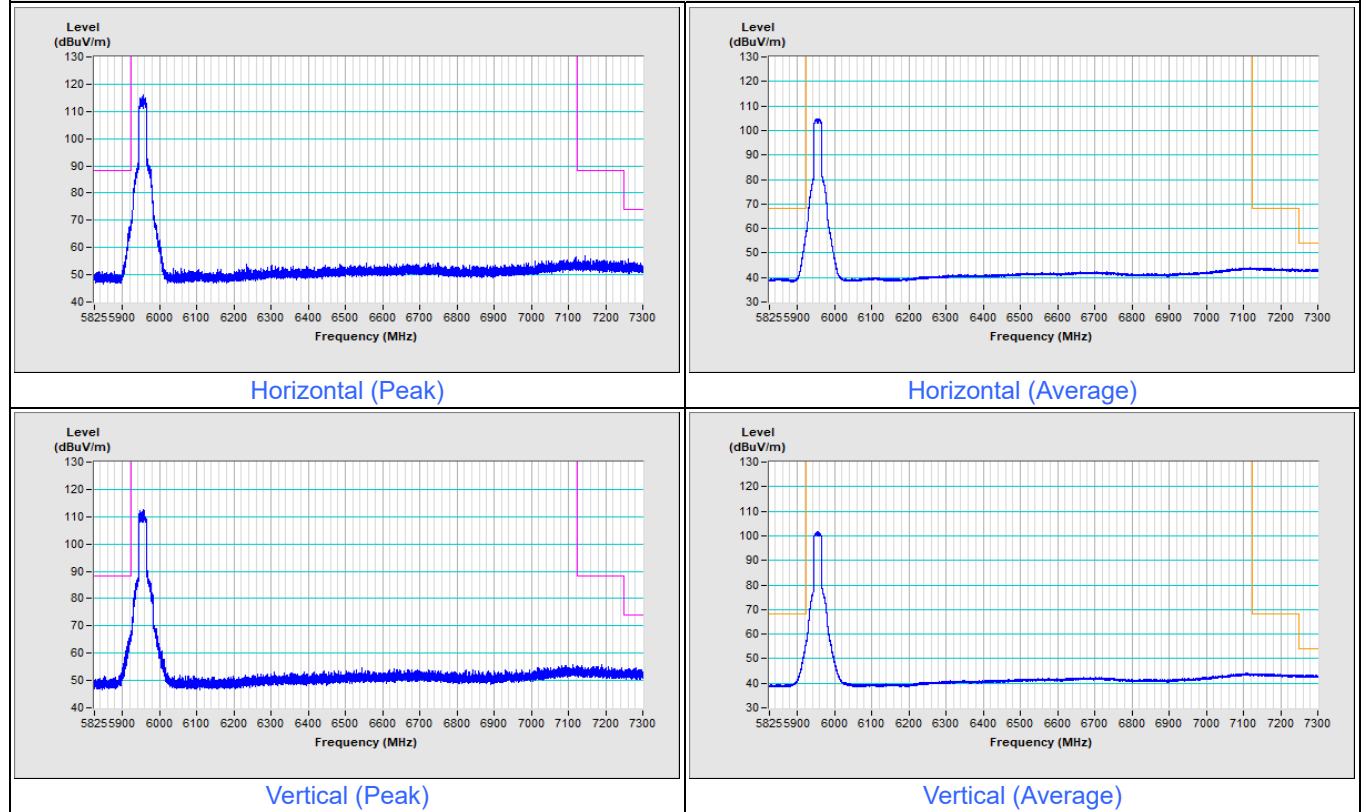

802.11be (EHT20) Channel 233

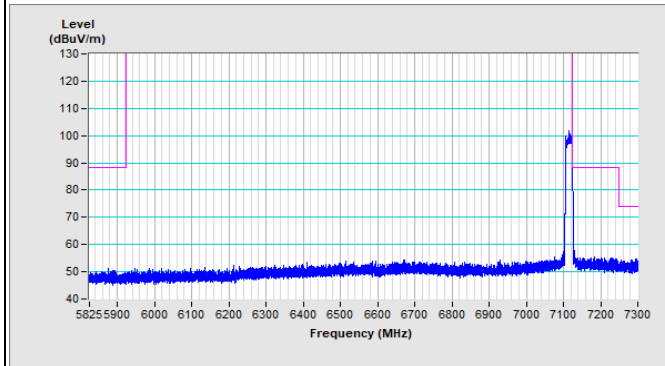

Horizontal (Peak)

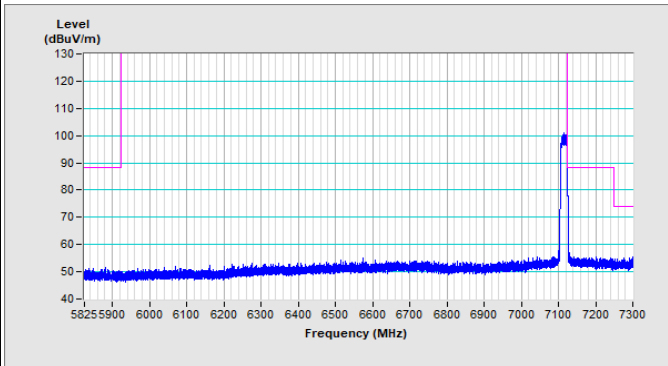


Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233




Horizontal (Average)

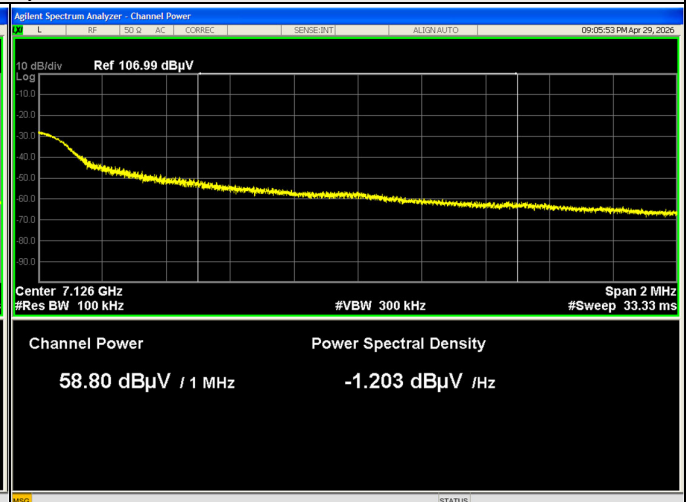


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

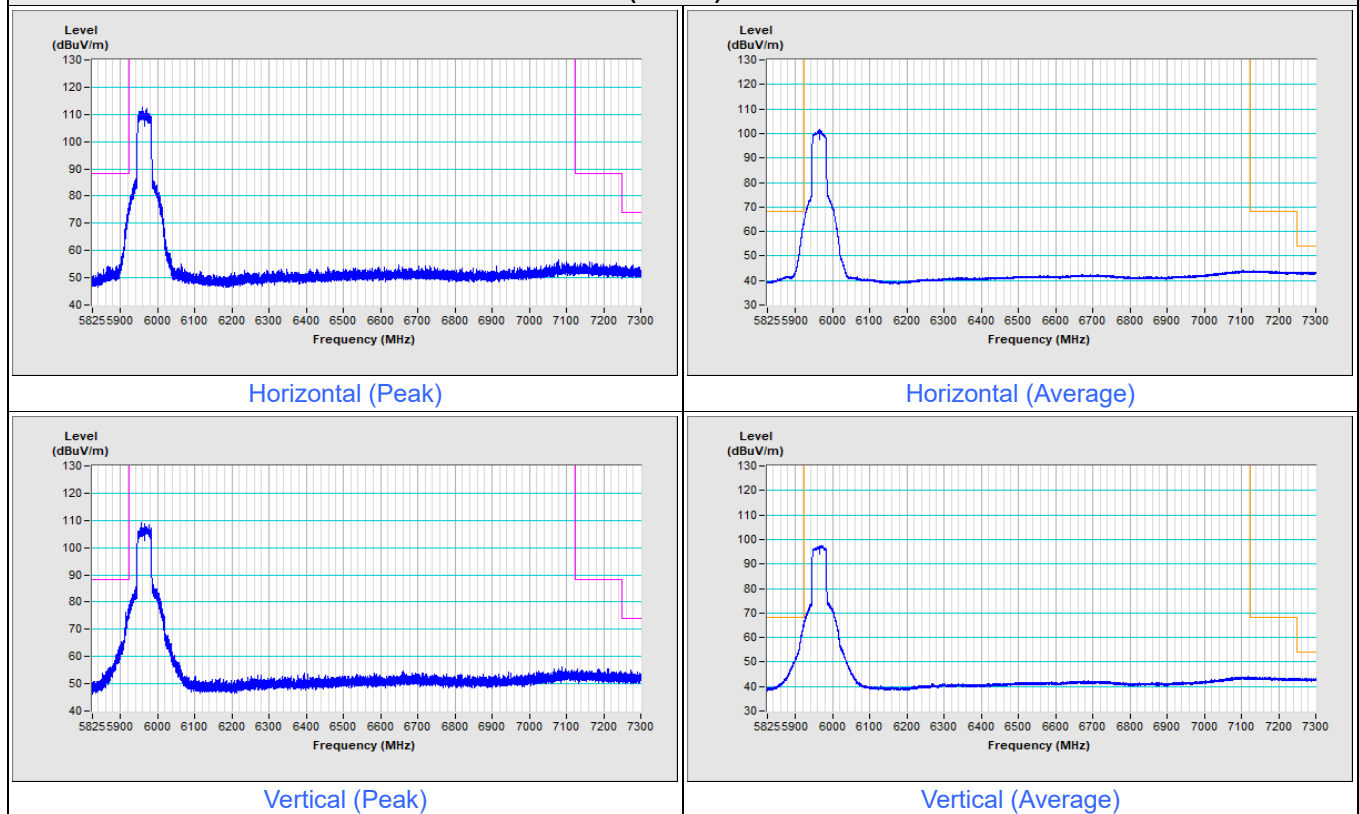


802.11be (EHT40) Channel 227

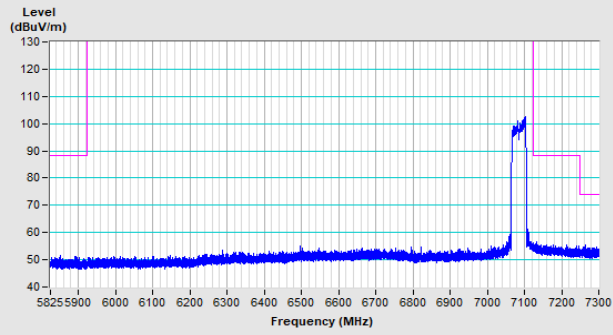


Horizontal (Peak)

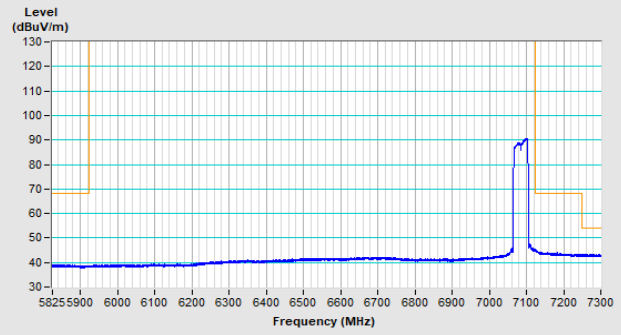

Horizontal (Average)

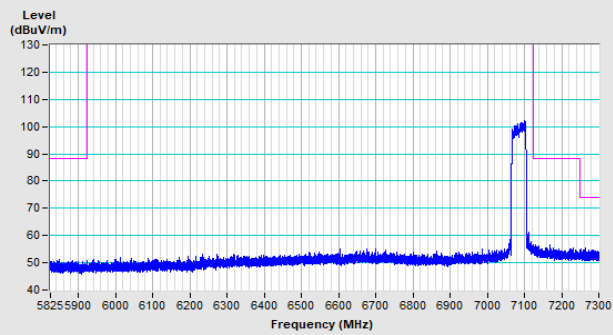


Vertical (Peak)

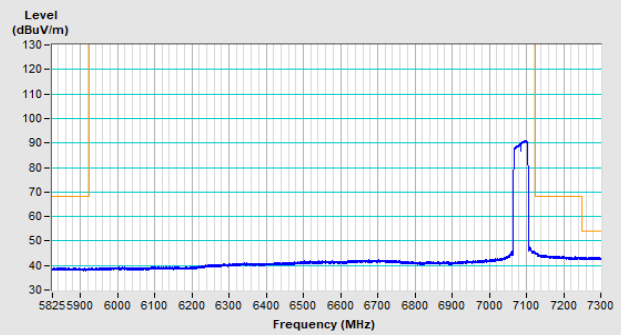


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

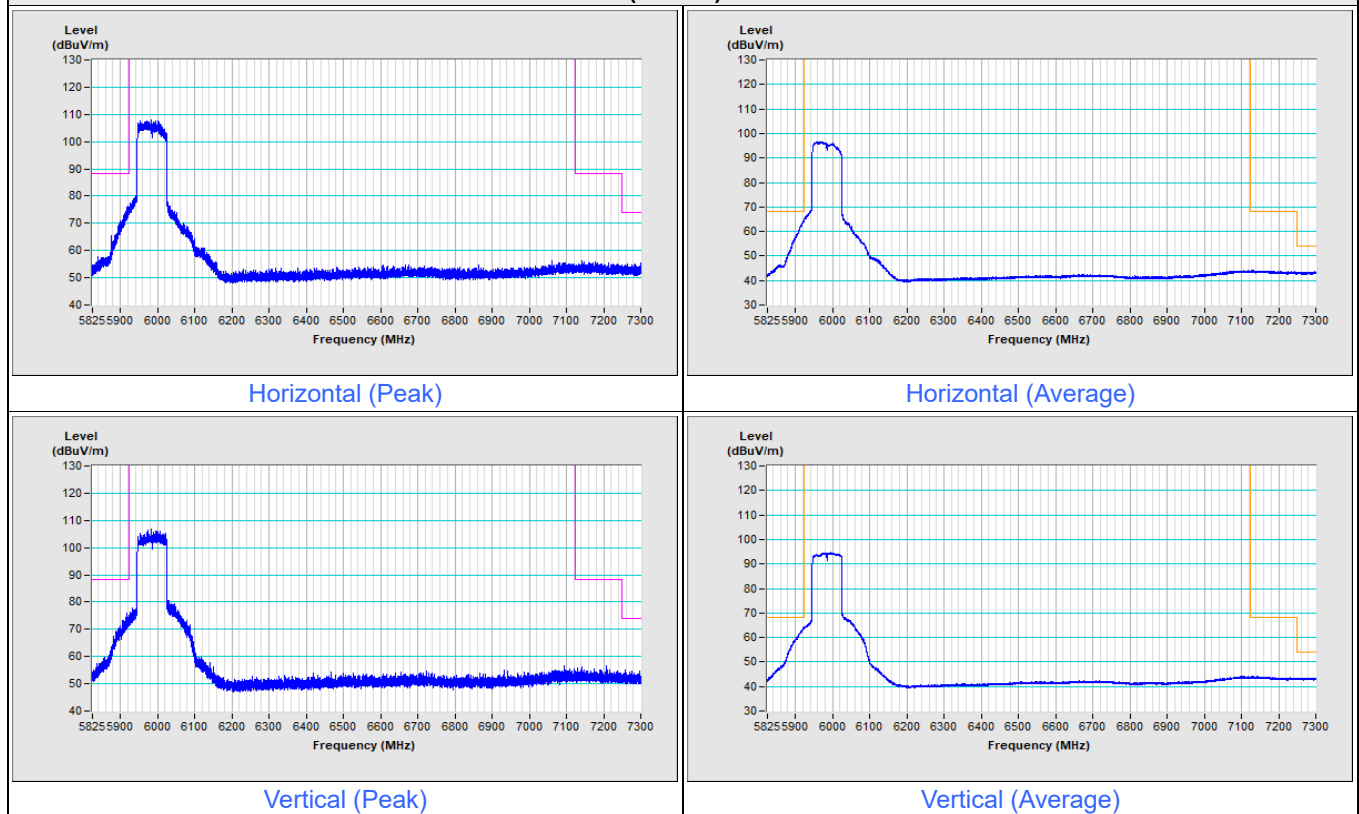


802.11be (EHT80) Channel 215

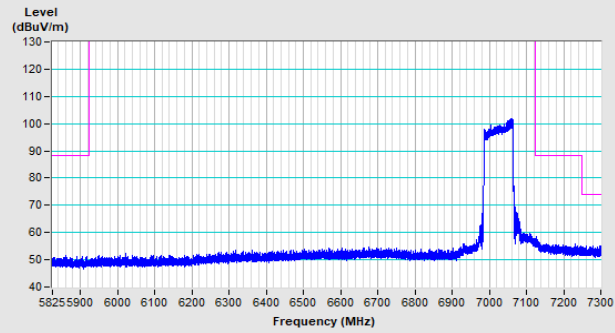


Horizontal (Peak)

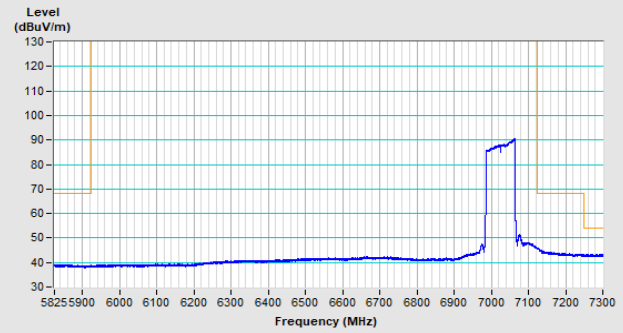

Horizontal (Average)

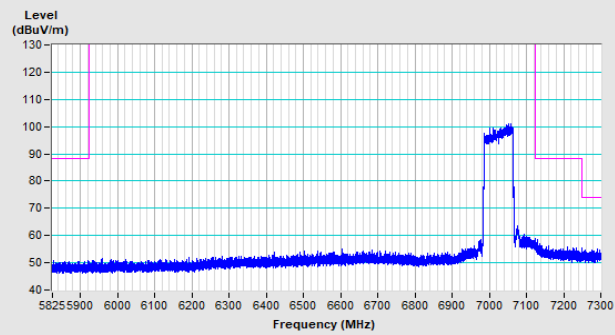


Vertical (Peak)

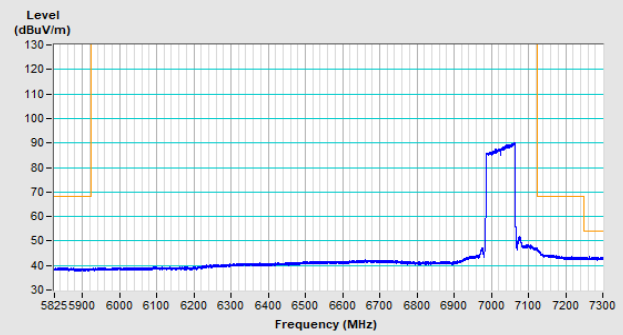


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

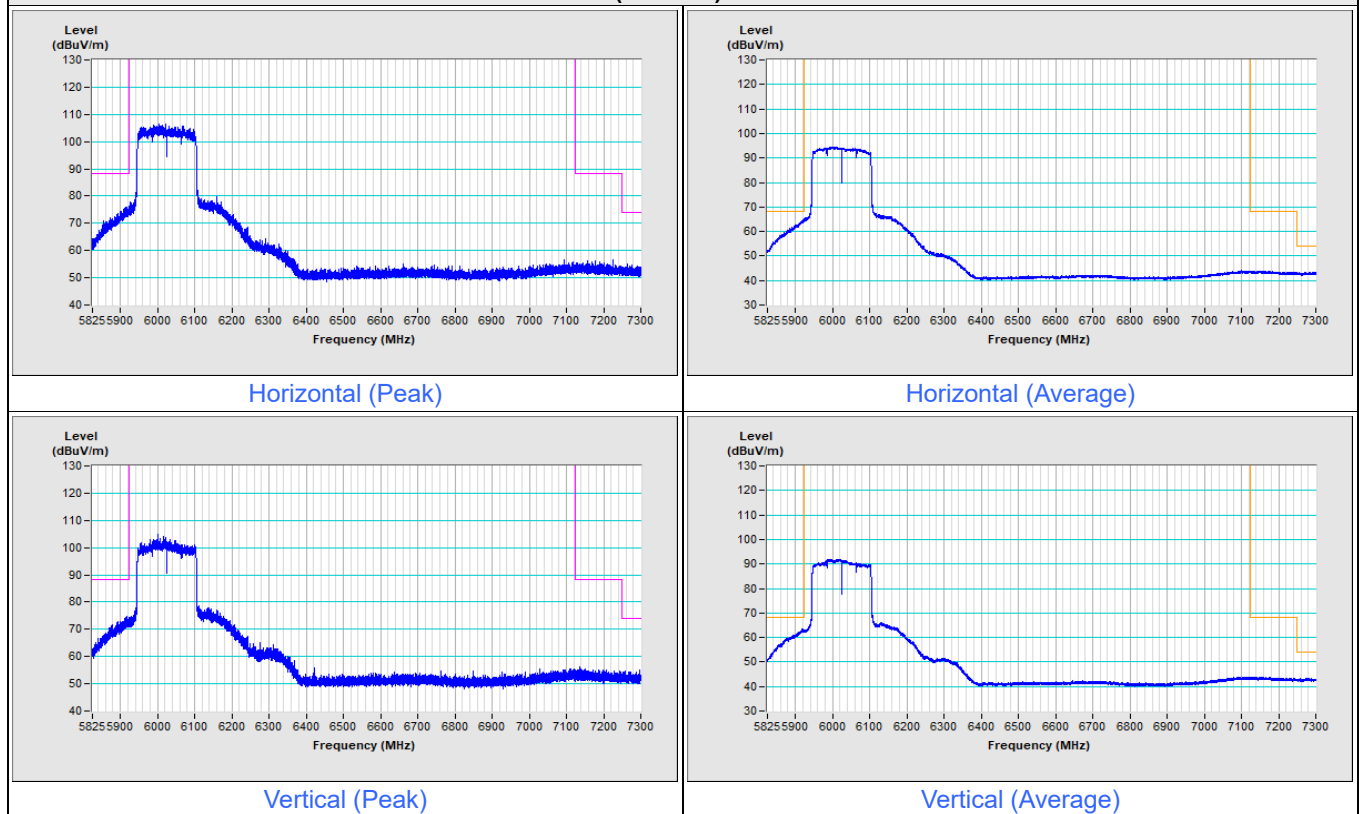


802.11be (EHT160) Channel 207

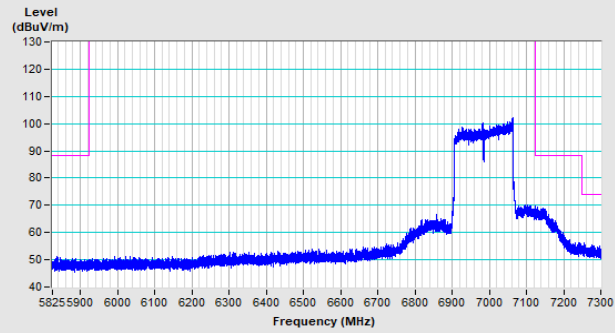


Horizontal (Peak)

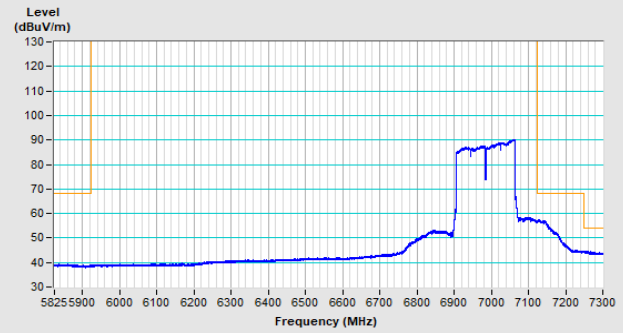

Horizontal (Average)

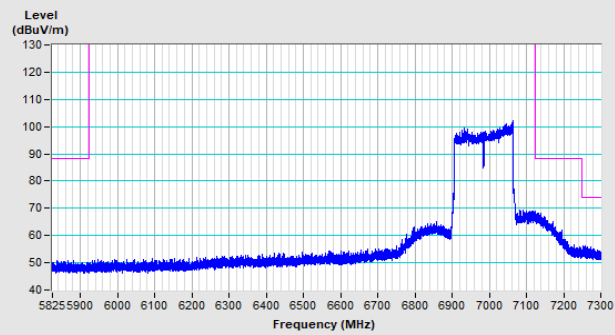


Vertical (Peak)

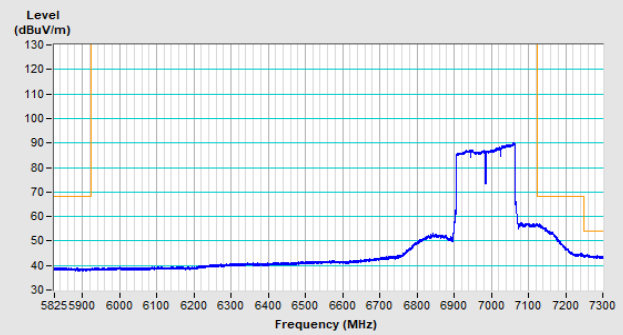


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

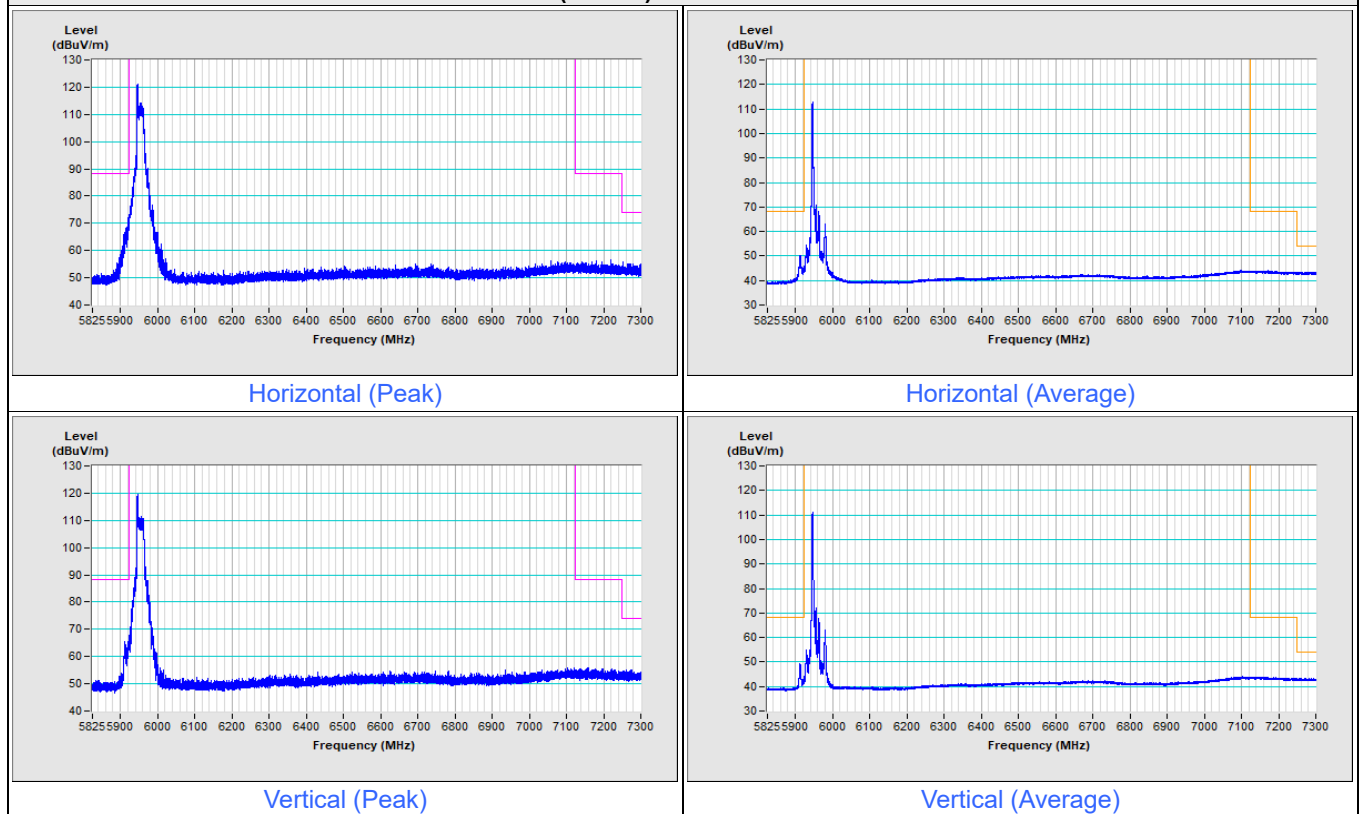

802.11be (EHT20) 26-tone RU Channel 233

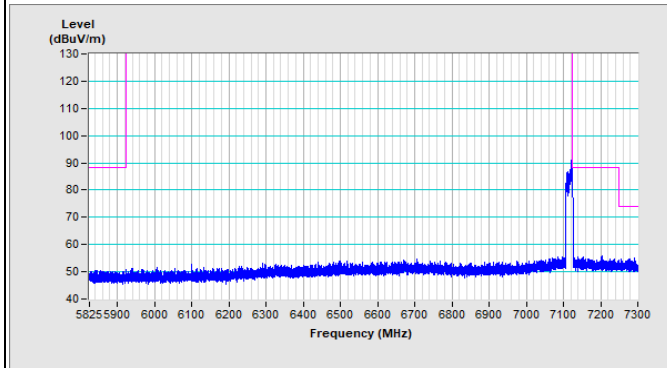

Horizontal (Peak)

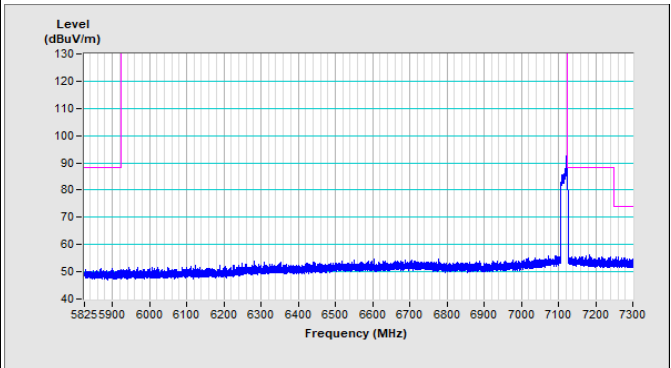

Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233




Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

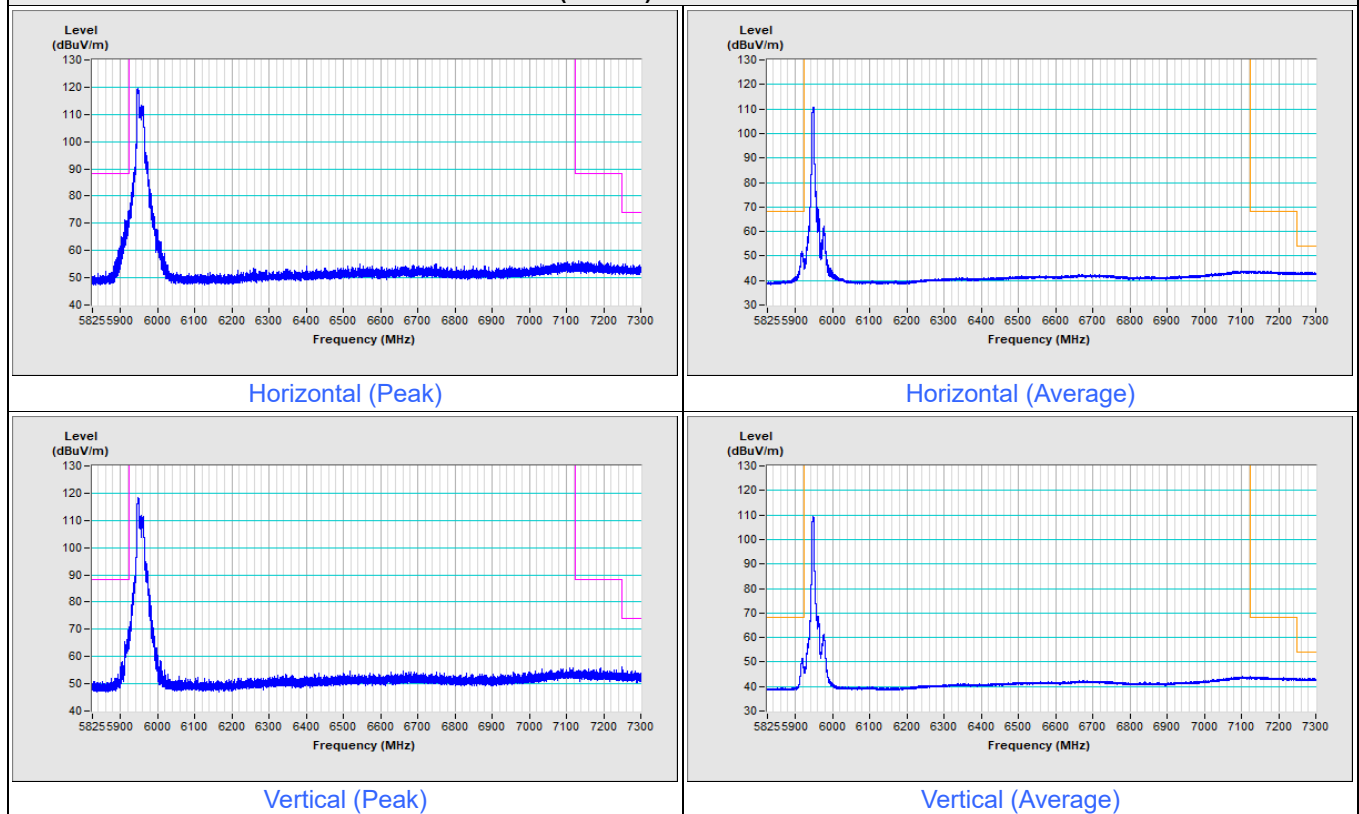

802.11be (EHT20) 52-tone RU Channel 233

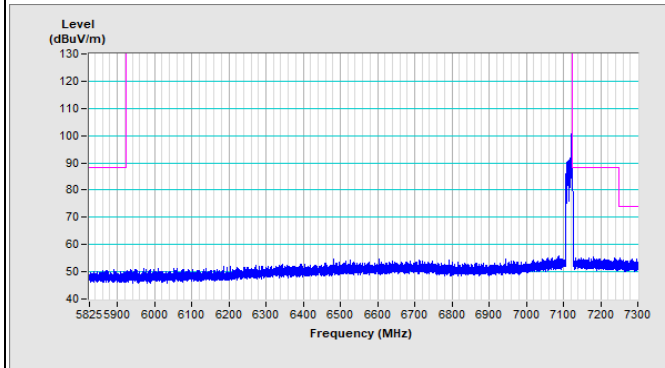

Horizontal (Peak)

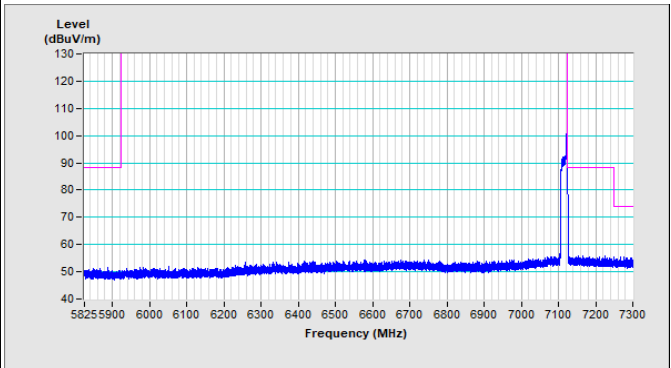


Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233




Horizontal (Average)

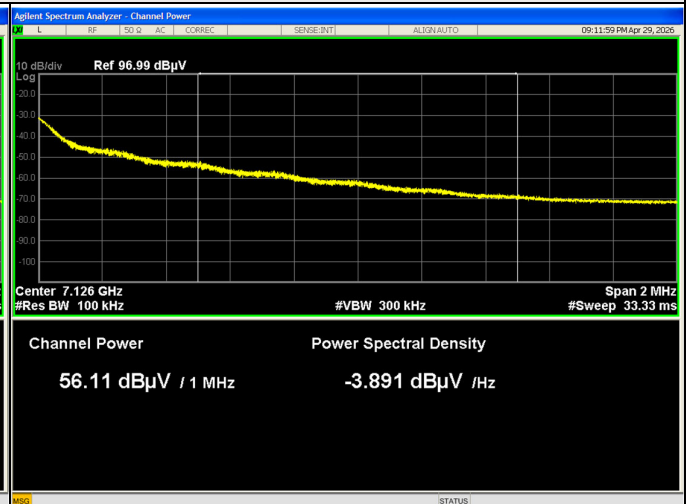


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

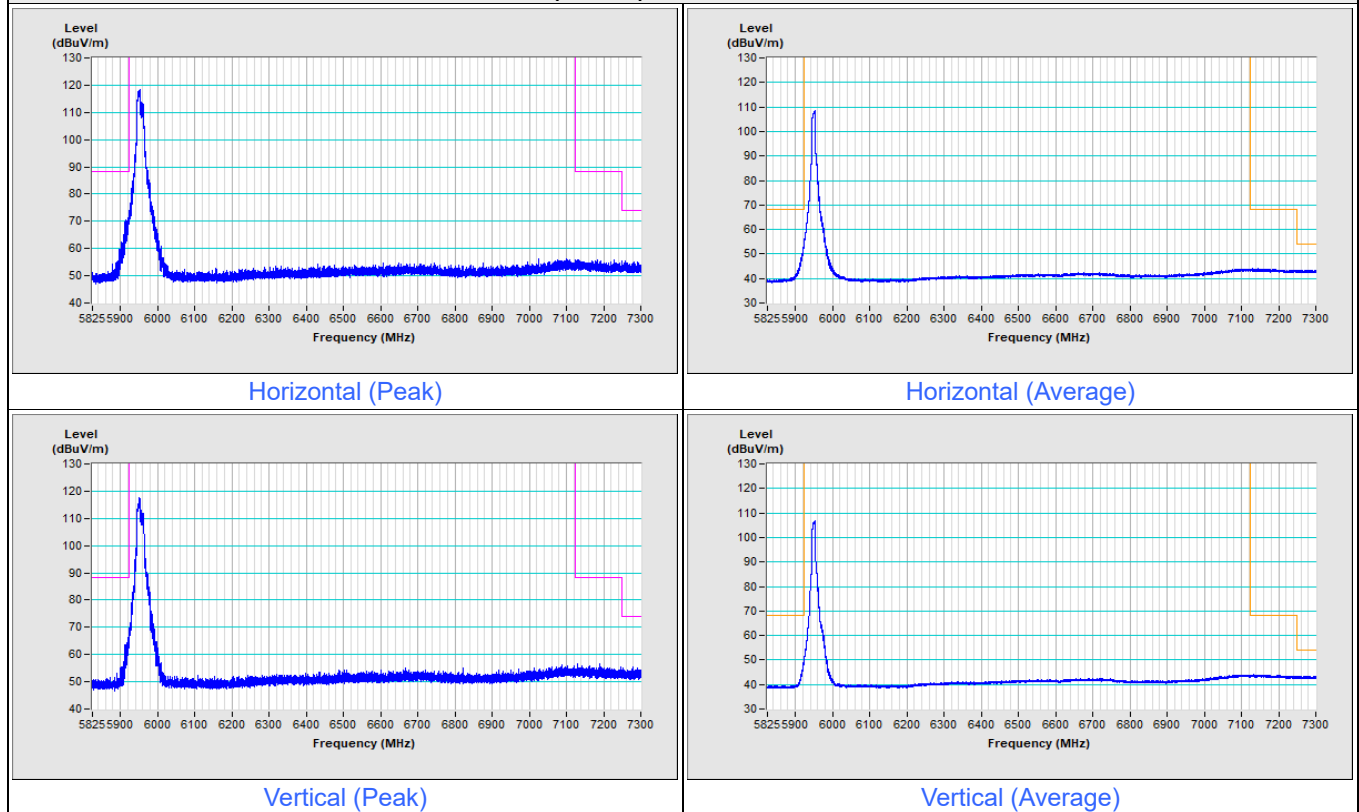

802.11be (EHT20) 106-tone RU Channel 233

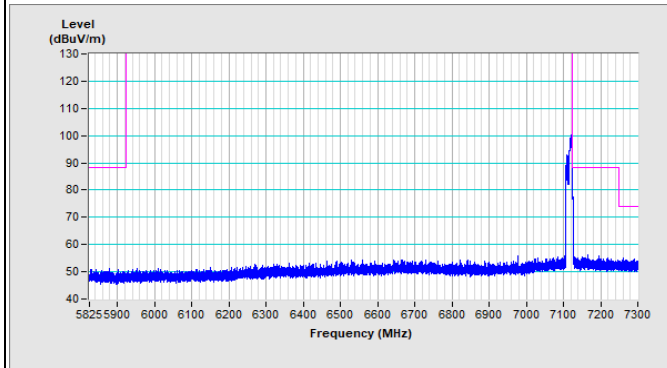


Horizontal (Peak)

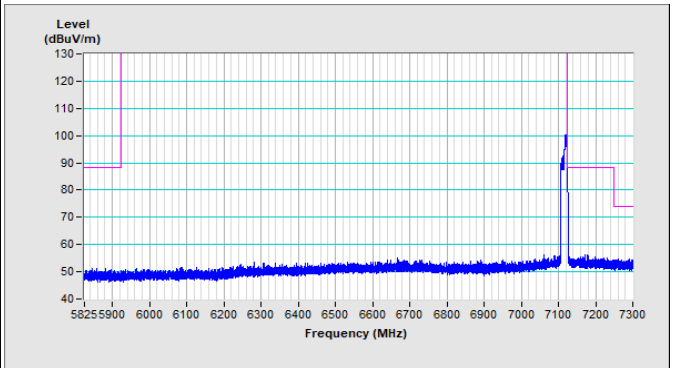

Vertical (Peak)

For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

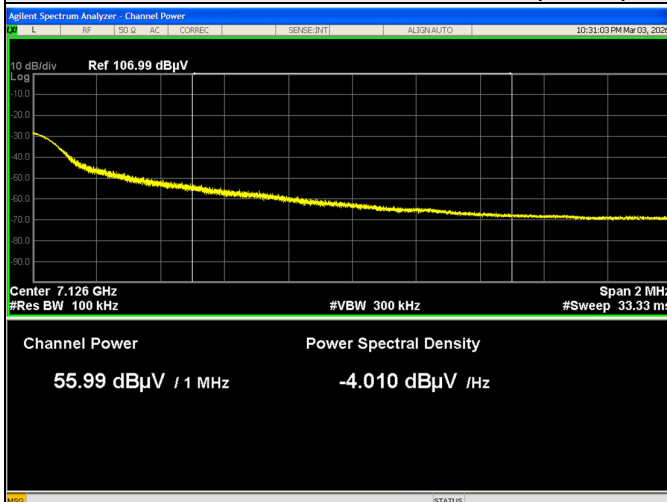


Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

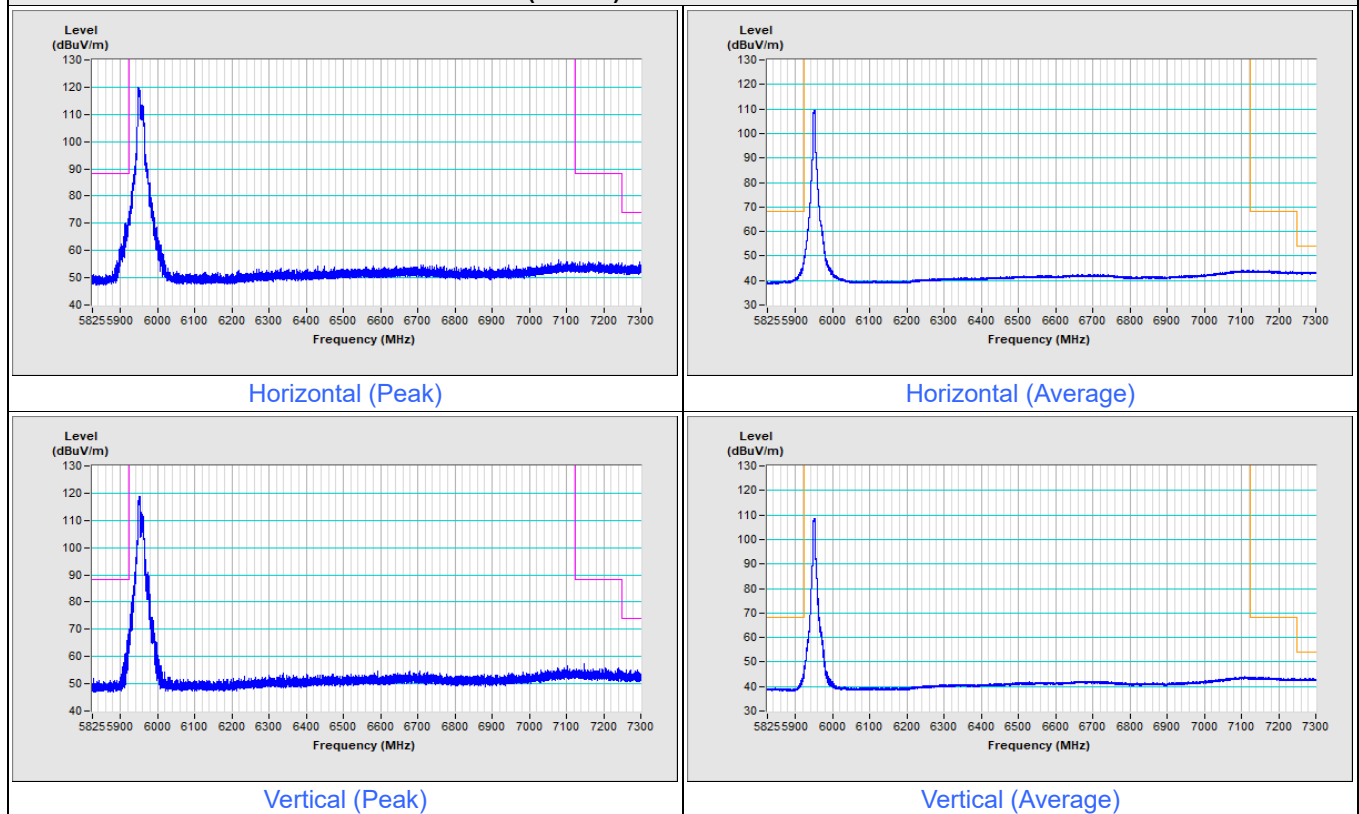


802.11be (EHT20) 52+26-tone MRU Channel 233

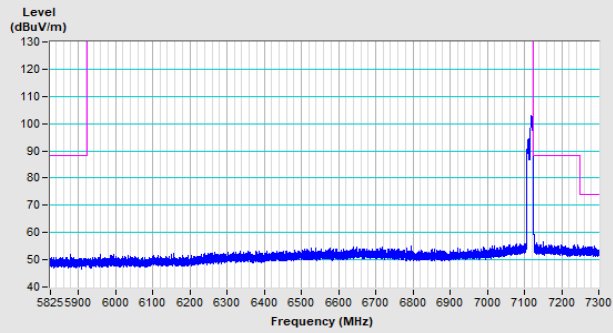


Horizontal (Peak)

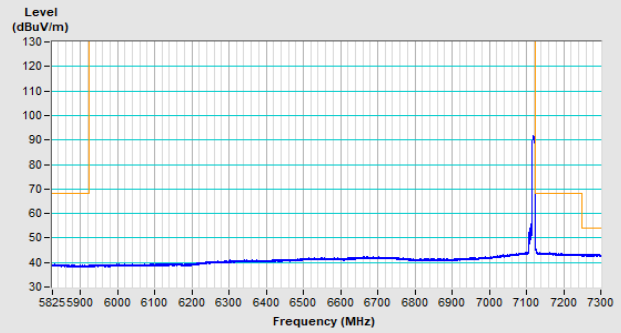

Horizontal (Average)

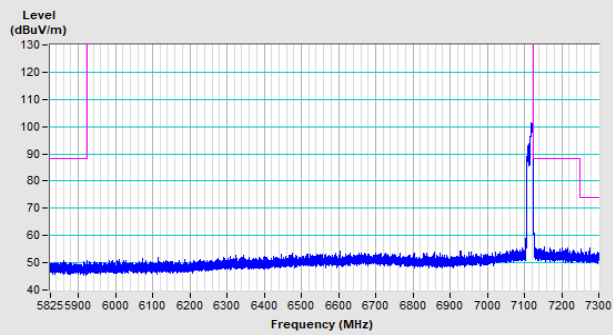


Vertical (Peak)

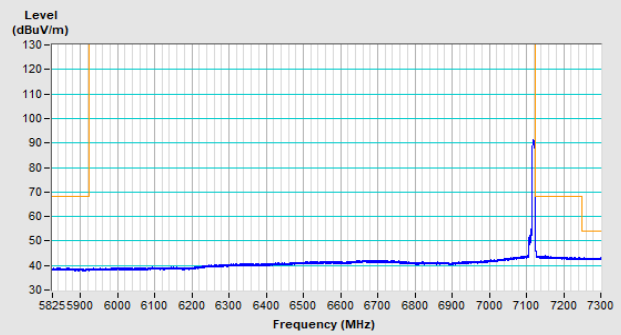


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

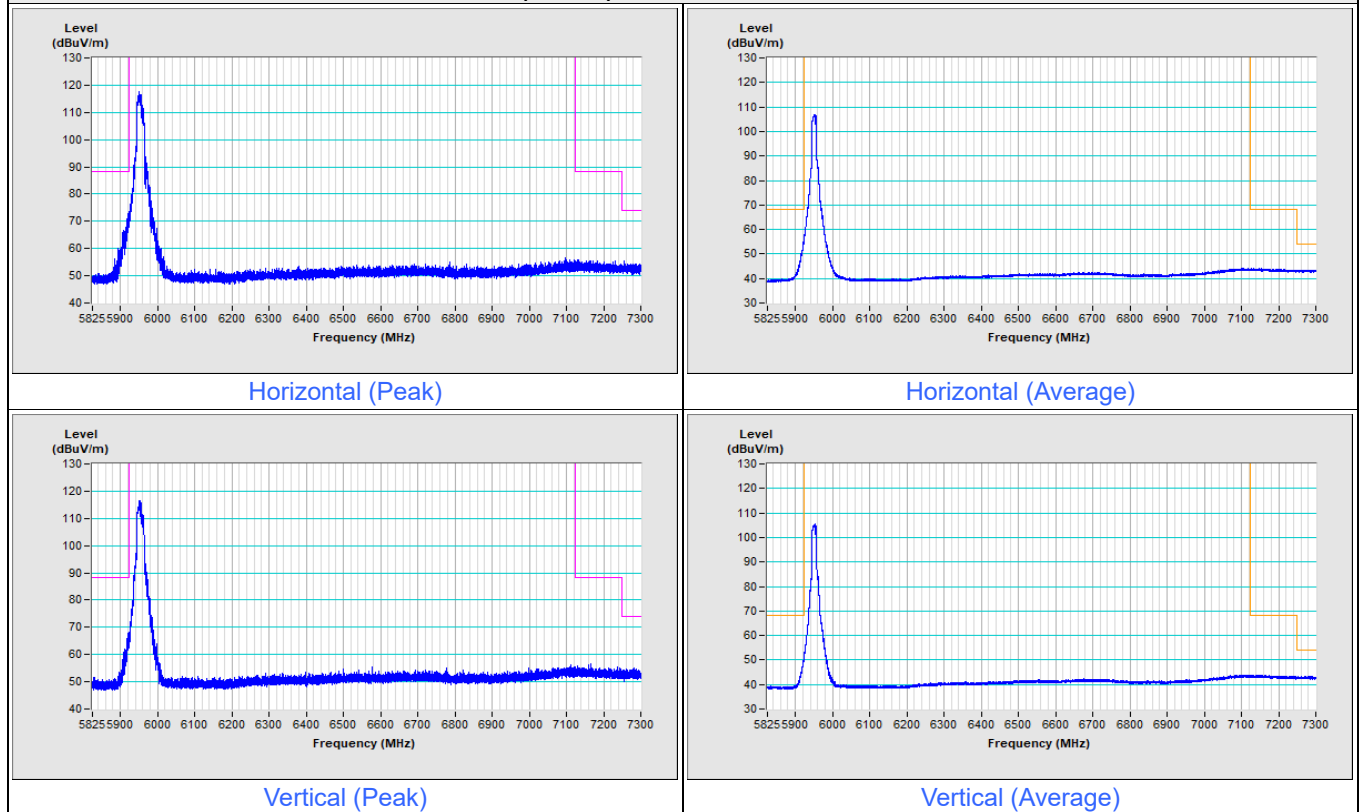

802.11be (EHT20) 106+26-tone MRU Channel 233

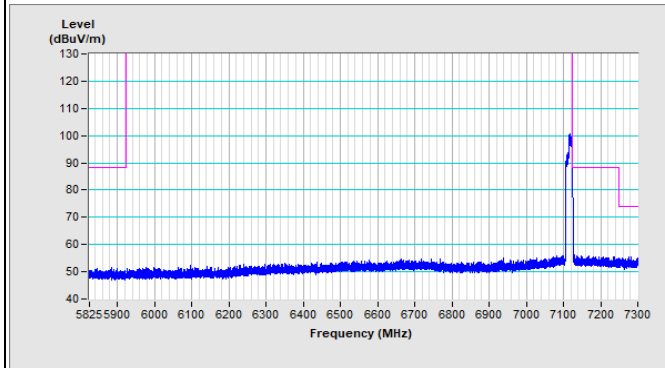


Horizontal (Peak)

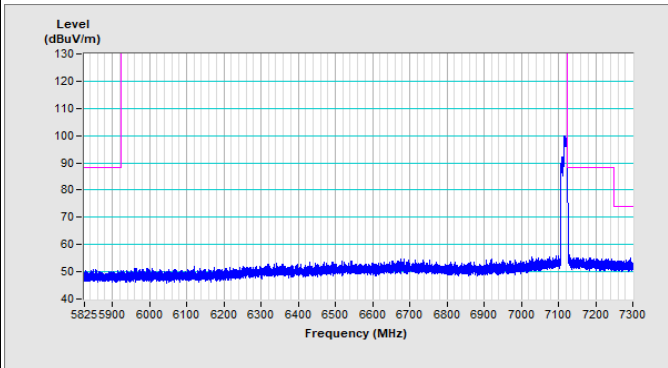


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233

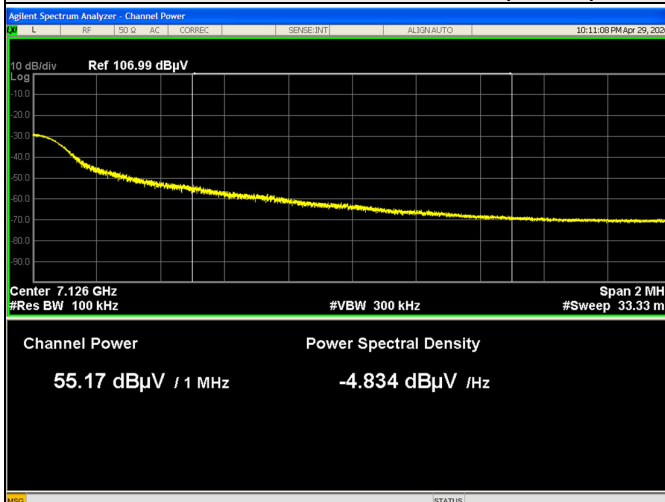


Horizontal (Average)

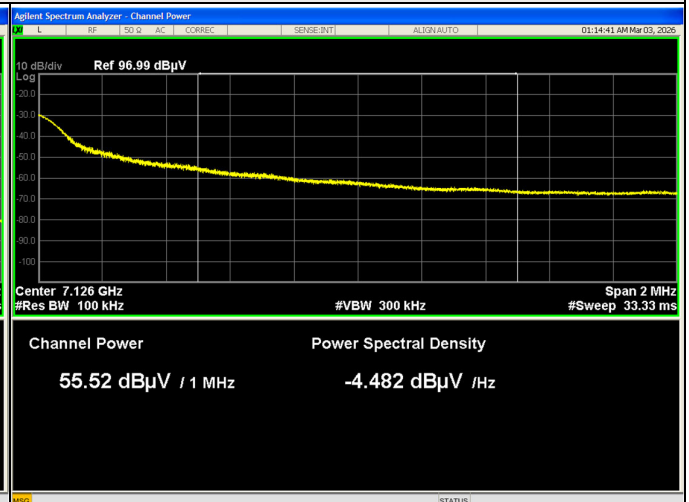


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

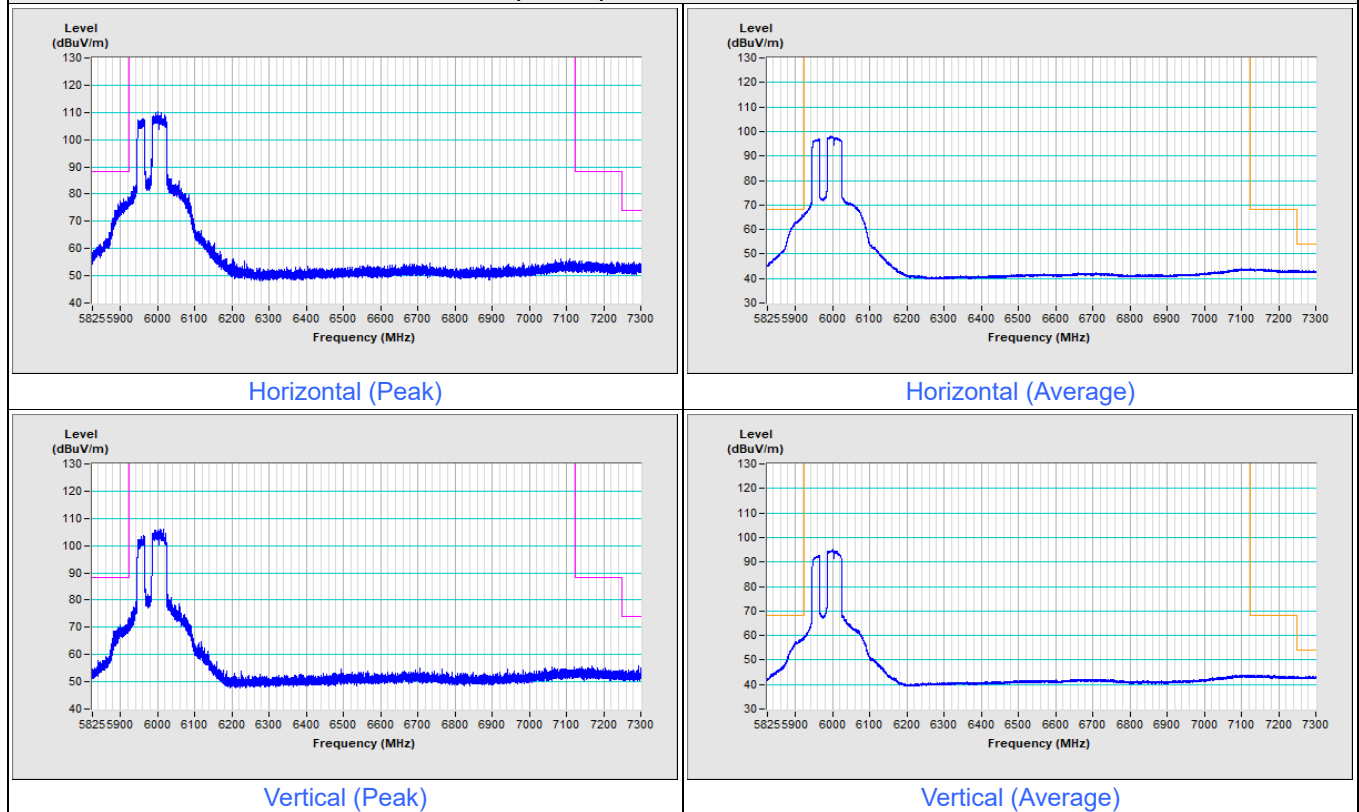


802.11be (EHT80) 484+242-tone MRU Channel 215

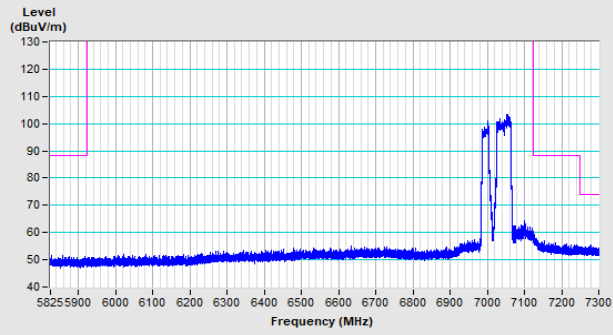


Horizontal (Peak)

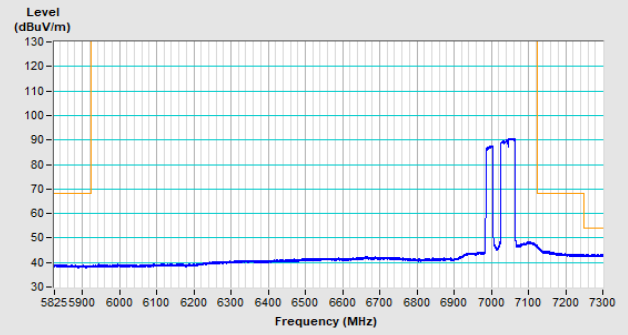

Horizontal (Average)

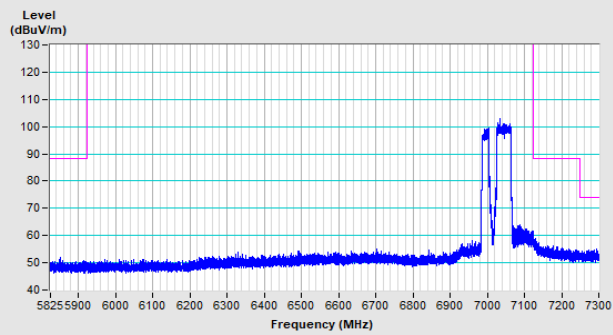


Vertical (Peak)

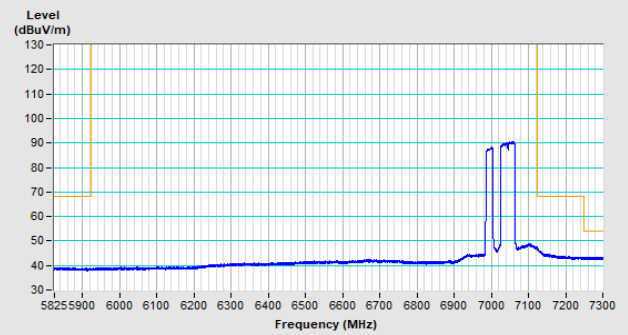


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

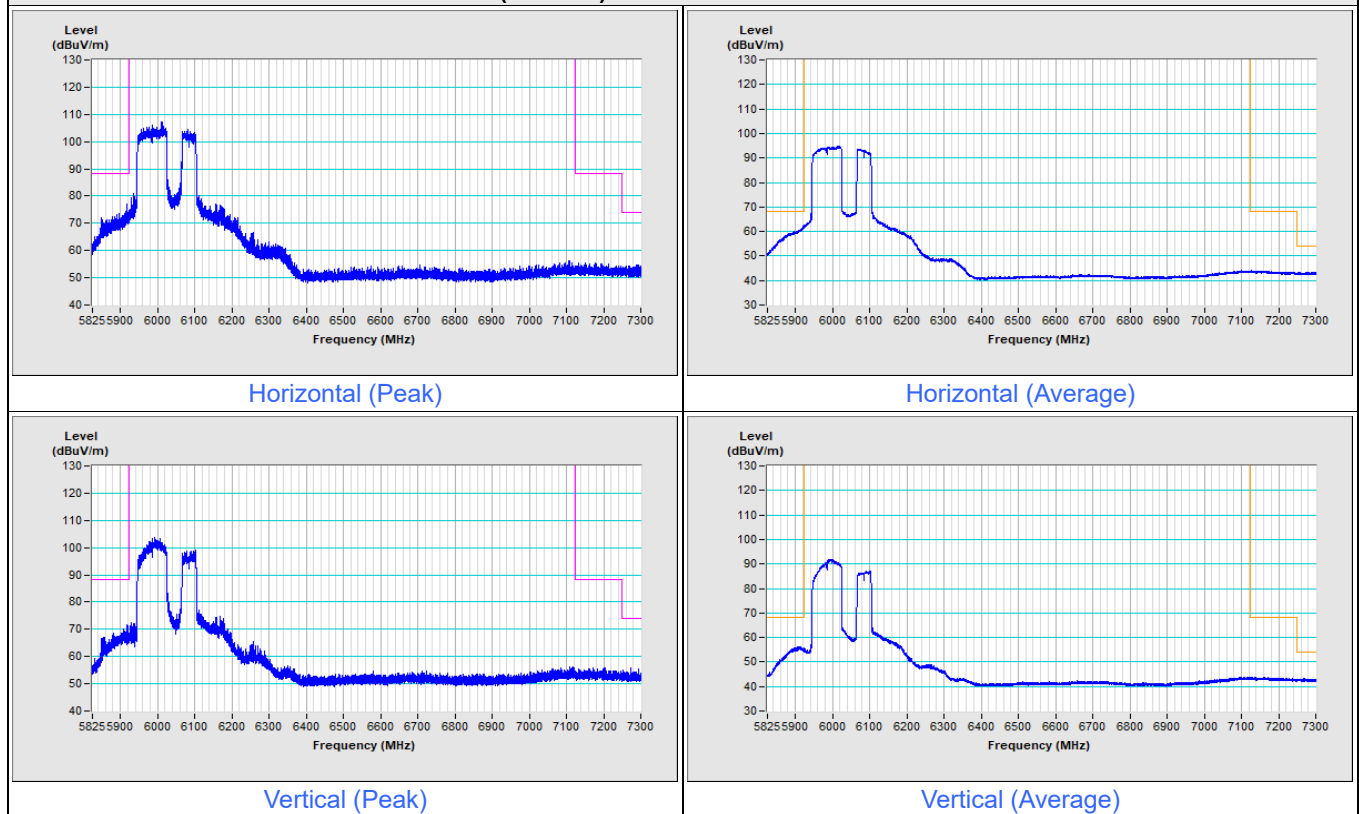


802.11be (EHT160) 996+484-tone MRU Channel 207

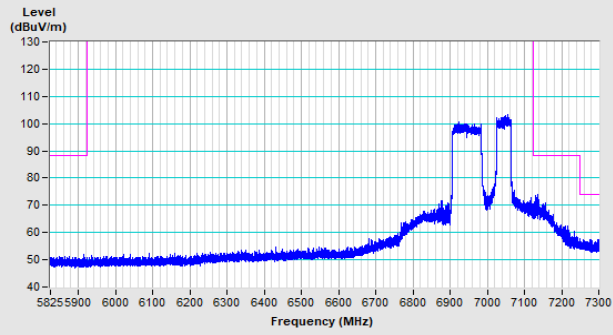


Horizontal (Peak)

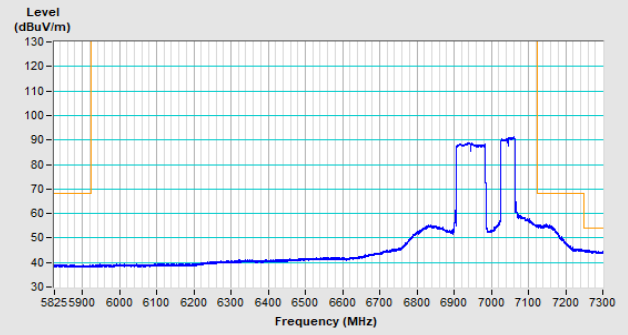

Horizontal (Average)

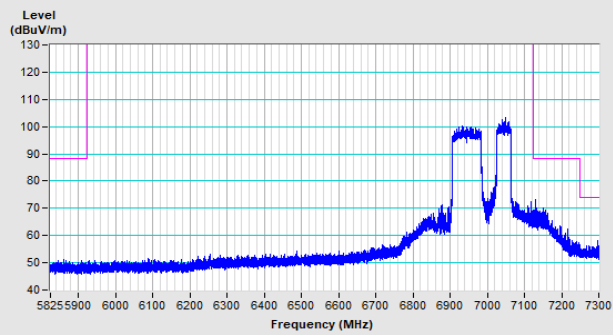


Vertical (Peak)

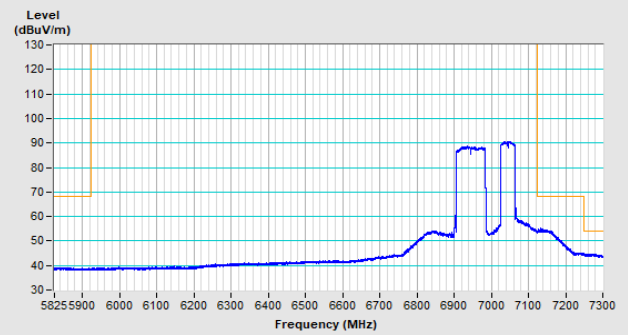


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

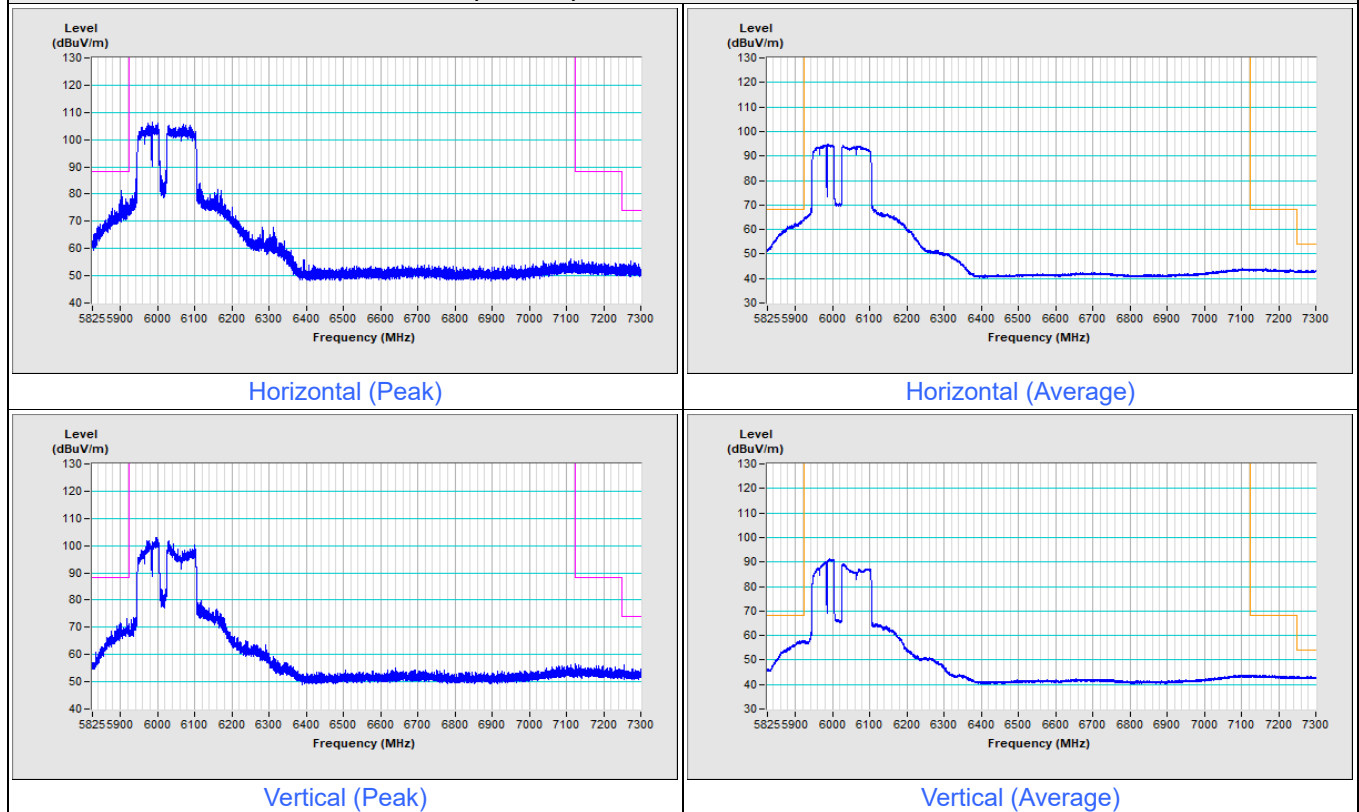


802.11be (EHT160) 996+484+242-tone MRU Channel 207

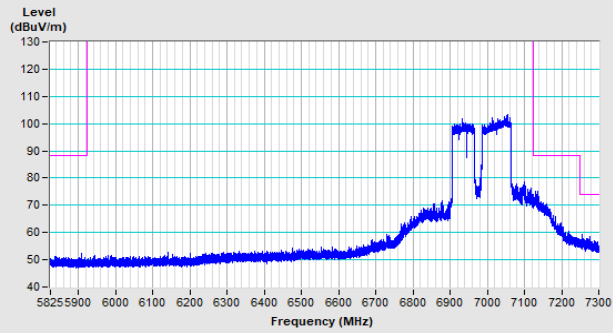


Horizontal (Peak)

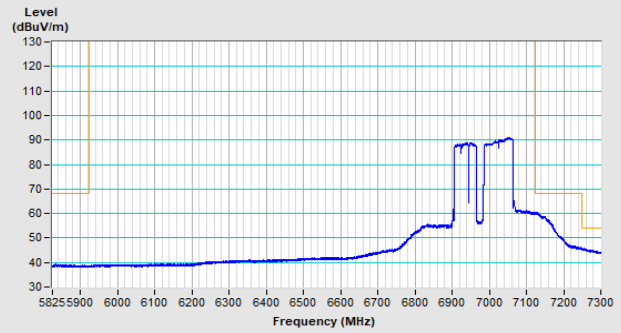

Horizontal (Average)

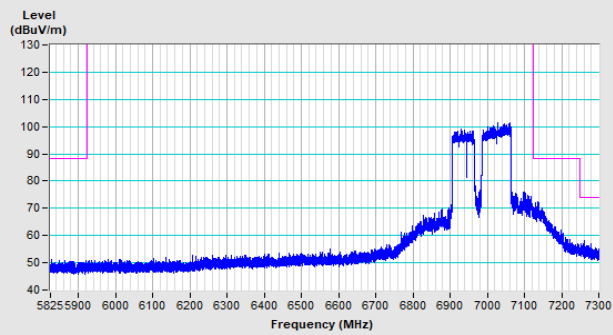

Vertical (Peak)

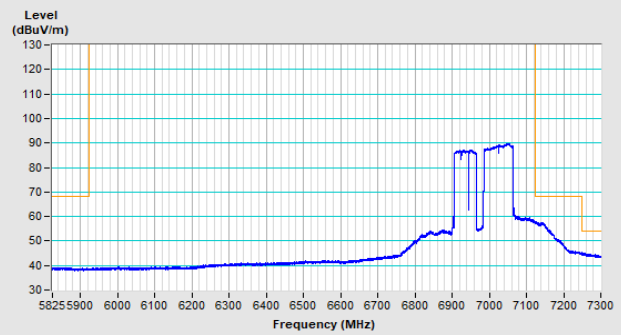

Vertical (Average)

Mode B
2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.2 PK	88.2	-24.0	1.25 H	265	59.9	4.3
2	#5925.00	50.5 AV	68.2	-17.7	1.25 H	265	46.2	4.3
3	*5955.00	115.2 PK			1.25 H	265	110.7	4.5
4	*5955.00	106.5 AV			1.25 H	265	102.0	4.5
5	11910.00	50.1 PK	74.0	-23.9	1.72 H	114	37.9	12.2
6	11910.00	39.8 AV	54.0	-14.2	1.72 H	114	27.6	12.2
7	17865.00	56.7 PK	74.0	-17.3	1.01 H	30	34.8	21.9
8	17865.00	45.1 AV	54.0	-8.9	1.01 H	30	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.8 PK	88.2	-26.4	1.40 V	289	57.5	4.3
2	#5925.00	49.2 AV	68.2	-19.0	1.40 V	289	44.9	4.3
3	*5955.00	112.2 PK			1.40 V	289	107.7	4.5
4	*5955.00	103.7 AV			1.40 V	289	99.2	4.5
5	11910.00	57.8 PK	74.0	-16.2	2.55 V	141	45.6	12.2
6	11910.00	46.4 AV	54.0	-7.6	2.55 V	141	34.2	12.2
7	17865.00	57.2 PK	74.0	-16.8	1.93 V	31	35.3	21.9
8	17865.00	46.0 AV	54.0	-8.0	1.93 V	31	24.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.3 PK			1.15 H	246	110.5	4.8
2	*6195.00	106.8 AV			1.15 H	246	102.0	4.8
3	12390.00	49.9 PK	74.0	-24.1	1.71 H	113	37.6	12.3
4	12390.00	39.6 AV	54.0	-14.4	1.71 H	113	27.3	12.3
5	18585.00	57.0 PK	74.0	-17.0	1.00 H	27	62.0	-5.0
6	18585.00	45.2 AV	54.0	-8.8	1.00 H	27	50.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.8 PK			3.57 V	308	109.0	4.8
2	*6195.00	104.3 AV			3.57 V	308	99.5	4.8
3	12390.00	57.8 PK	74.0	-16.2	2.53 V	126	45.5	12.3
4	12390.00	46.7 AV	54.0	-7.3	2.53 V	126	34.4	12.3
5	18585.00	57.9 PK	74.0	-16.1	1.90 V	23	62.9	-5.0
6	18585.00	46.4 AV	54.0	-7.6	1.90 V	23	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.7 PK			1.11 H	206	108.3	6.4
2	*6415.00	105.8 AV			1.11 H	206	99.4	6.4
3	#12830.00	50.2 PK	88.2	-38.0	1.75 H	116	37.2	13.0
4	#12830.00	40.2 AV	68.2	-28.0	1.75 H	116	27.2	13.0
5	19245.00	57.0 PK	74.0	-17.0	1.00 H	44	60.8	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.00 H	44	49.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.5 PK			1.20 V	298	106.1	6.4
2	*6415.00	103.5 AV			1.20 V	298	97.1	6.4
3	#12830.00	57.9 PK	88.2	-30.3	2.57 V	139	44.9	13.0
4	#12830.00	46.5 AV	68.2	-21.7	2.57 V	139	33.5	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.90 V	43	61.1	-3.8
6	19245.00	46.0 AV	54.0	-8.0	1.90 V	43	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	96.6 PK			1.10 H	204	90.2	6.4
2	*6435.00	88.2 AV			1.10 H	204	81.8	6.4
3	#12870.00	50.2 PK	88.2	-38.0	1.72 H	116	37.2	13.0
4	#12870.00	40.0 AV	68.2	-28.2	1.72 H	116	27.0	13.0
5	19305.00	56.6 PK	74.0	-17.4	1.00 H	45	60.3	-3.7
6	19305.00	44.8 AV	54.0	-9.2	1.00 H	45	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	97.4 PK			1.00 V	236	91.0	6.4
2	*6435.00	88.1 AV			1.00 V	236	81.7	6.4
3	#12870.00	57.7 PK	88.2	-30.5	2.49 V	145	44.7	13.0
4	#12870.00	46.4 AV	68.2	-21.8	2.49 V	145	33.4	13.0
5	19305.00	57.2 PK	74.0	-16.8	1.97 V	34	60.9	-3.7
6	19305.00	45.7 AV	54.0	-8.3	1.97 V	34	49.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.8 PK			1.15 H	205	109.2	6.6
2	*6475.00	107.0 AV			1.15 H	205	100.4	6.6
3	#12950.00	50.3 PK	88.2	-37.9	1.67 H	99	37.2	13.1
4	#12950.00	40.0 AV	68.2	-28.2	1.67 H	99	26.9	13.1
5	19425.00	57.1 PK	74.0	-16.9	1.03 H	41	60.9	-3.8
6	19425.00	45.2 AV	54.0	-8.8	1.03 H	41	49.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.2 PK			1.24 V	290	107.6	6.6
2	*6475.00	105.8 AV			1.24 V	290	99.2	6.6
3	#12950.00	58.0 PK	88.2	-30.2	2.50 V	131	44.9	13.1
4	#12950.00	46.3 AV	68.2	-21.9	2.50 V	131	33.2	13.1
5	19425.00	56.8 PK	74.0	-17.2	1.91 V	15	60.6	-3.8
6	19425.00	45.6 AV	54.0	-8.4	1.91 V	15	49.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	97.5 PK			1.08 H	203	90.6	6.9
2	*6515.00	89.1 AV			1.08 H	203	82.2	6.9
3	#13030.00	49.9 PK	88.2	-38.3	1.75 H	104	36.7	13.2
4	#13030.00	39.5 AV	68.2	-28.7	1.75 H	104	26.3	13.2
5	19545.00	56.8 PK	74.0	-17.2	1.07 H	30	60.9	-4.1
6	19545.00	45.2 AV	54.0	-8.8	1.07 H	30	49.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	96.3 PK			1.06 V	222	89.4	6.9
2	*6515.00	87.5 AV			1.06 V	222	80.6	6.9
3	#13030.00	57.5 PK	88.2	-30.7	2.53 V	128	44.3	13.2
4	#13030.00	46.2 AV	68.2	-22.0	2.53 V	128	33.0	13.2
5	19545.00	56.7 PK	74.0	-17.3	1.91 V	21	60.8	-4.1
6	19545.00	45.6 AV	54.0	-8.4	1.91 V	21	49.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.2 PK			1.04 H	211	109.3	6.9
2	*6535.00	107.4 AV			1.04 H	211	100.5	6.9
3	#13070.00	50.6 PK	88.2	-37.6	1.73 H	119	37.4	13.2
4	#13070.00	40.0 AV	68.2	-28.2	1.73 H	119	26.8	13.2
5	19605.00	56.6 PK	74.0	-17.4	1.00 H	27	60.6	-4.0
6	19605.00	45.3 AV	54.0	-8.7	1.00 H	27	49.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.8 PK			1.38 V	306	107.9	6.9
2	*6535.00	106.3 AV			1.38 V	306	99.4	6.9
3	#13070.00	57.6 PK	88.2	-30.6	2.56 V	132	44.4	13.2
4	#13070.00	46.4 AV	68.2	-21.8	2.56 V	132	33.2	13.2
5	19605.00	56.5 PK	74.0	-17.5	1.91 V	44	60.5	-4.0
6	19605.00	45.6 AV	54.0	-8.4	1.91 V	44	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.4 PK			1.04 H	204	109.2	7.2
2	*6695.00	107.5 AV			1.04 H	204	100.3	7.2
3	13390.00	50.1 PK	74.0	-23.9	1.68 H	125	36.1	14.0
4	13390.00	39.8 AV	54.0	-14.2	1.68 H	125	25.8	14.0
5	20085.00	57.0 PK	74.0	-17.0	1.00 H	15	60.5	-3.5
6	20085.00	45.2 AV	54.0	-8.8	1.00 H	15	48.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.0 PK			1.14 V	293	107.8	7.2
2	*6695.00	106.5 AV			1.14 V	293	99.3	7.2
3	13390.00	57.7 PK	74.0	-16.3	2.58 V	129	43.7	14.0
4	13390.00	46.4 AV	54.0	-7.6	2.58 V	129	32.4	14.0
5	20085.00	56.6 PK	74.0	-17.4	1.95 V	28	60.1	-3.5
6	20085.00	45.5 AV	54.0	-8.5	1.95 V	28	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.6 PK			1.06 H	210	110.4	7.2
2	*6855.00	108.3 AV			1.06 H	210	101.1	7.2
3	#13710.00	49.9 PK	88.2	-38.3	1.68 H	118	34.7	15.2
4	#13710.00	39.6 AV	68.2	-28.6	1.68 H	118	24.4	15.2
5	20565.00	56.1 PK	74.0	-17.9	1.03 H	36	59.4	-3.3
6	20565.00	44.8 AV	54.0	-9.2	1.03 H	36	48.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.1 PK			1.16 V	301	108.9	7.2
2	*6855.00	107.2 AV			1.16 V	301	100.0	7.2
3	#13710.00	57.3 PK	88.2	-30.9	2.59 V	137	42.1	15.2
4	#13710.00	46.1 AV	68.2	-22.1	2.59 V	137	30.9	15.2
5	20565.00	56.9 PK	74.0	-17.1	1.87 V	21	60.2	-3.3
6	20565.00	45.9 AV	54.0	-8.1	1.87 V	21	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	97.0 PK			1.07 H	201	89.8	7.2
2	*6875.00	88.5 AV			1.07 H	201	81.3	7.2
3	#13750.00	49.8 PK	88.2	-38.4	1.75 H	109	34.7	15.1
4	#13750.00	39.6 AV	68.2	-28.6	1.75 H	109	24.5	15.1
5	20625.00	56.4 PK	74.0	-17.6	1.05 H	15	59.7	-3.3
6	20625.00	44.7 AV	54.0	-9.3	1.05 H	15	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	96.7 PK			1.00 V	211	89.5	7.2
2	*6875.00	87.7 AV			1.00 V	211	80.5	7.2
3	#13750.00	58.1 PK	88.2	-30.1	2.59 V	144	43.0	15.1
4	#13750.00	46.7 AV	68.2	-21.5	2.59 V	144	31.6	15.1
5	20625.00	57.5 PK	74.0	-16.5	1.87 V	40	60.8	-3.3
6	20625.00	46.3 AV	54.0	-7.7	1.87 V	40	49.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	95.4 PK			1.02 H	208	87.4	8.0
2	*6995.00	87.0 AV			1.02 H	208	79.0	8.0
3	#13990.00	50.6 PK	88.2	-37.6	1.75 H	101	35.0	15.6
4	#13990.00	40.3 AV	68.2	-27.9	1.75 H	101	24.7	15.6
5	20985.00	57.2 PK	74.0	-16.8	1.03 H	15	60.0	-2.8
6	20985.00	45.3 AV	54.0	-8.7	1.03 H	15	48.1	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	97.1 PK			1.00 V	214	89.1	8.0
2	*6995.00	88.1 AV			1.00 V	214	80.1	8.0
3	#13990.00	57.8 PK	88.2	-30.4	2.56 V	150	42.2	15.6
4	#13990.00	46.2 AV	68.2	-22.0	2.56 V	150	30.6	15.6
5	20985.00	56.9 PK	74.0	-17.1	1.97 V	41	59.7	-2.8
6	20985.00	45.9 AV	54.0	-8.1	1.97 V	41	48.7	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.6 PK			1.05 H	305	89.1	9.5
2	*7115.00	90.5 AV			1.05 H	305	81.0	9.5
3	#7125.00	67.0 PK	88.2	-21.2	1.05 H	305	57.6	9.4
4	#7125.00	47.3 AV	68.2	-20.9	1.05 H	305	37.9	9.4
5	7250.00	54.6 PK	74.0	-19.4	1.05 H	305	45.9	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.05 H	305	34.7	8.7
7	#14230.00	50.9 PK	88.2	-37.3	1.71 H	129	35.6	15.3
8	#14230.00	40.3 AV	68.2	-27.9	1.71 H	129	25.0	15.3
9	21345.00	56.8 PK	74.0	-17.2	1.04 H	33	58.4	-1.6
10	21345.00	45.2 AV	54.0	-8.8	1.04 H	33	46.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.7 PK			1.02 V	222	87.2	9.5
2	*7115.00	87.7 AV			1.02 V	222	78.2	9.5
3	#7125.00	72.1 PK	88.2	-16.1	1.02 V	222	62.7	9.4
4	#7125.00	57.8 AV	68.2	-10.4	1.02 V	222	48.4	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.02 V	222	46.4	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.02 V	222	34.8	8.7
7	#14230.00	57.7 PK	88.2	-30.5	2.58 V	155	42.4	15.3
8	#14230.00	46.1 AV	68.2	-22.1	2.58 V	155	30.8	15.3
9	21345.00	56.8 PK	74.0	-17.2	1.91 V	35	58.4	-1.6
10	21345.00	45.8 AV	54.0	-8.2	1.91 V	35	47.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.2 PK	88.2	-18.0	1.08 H	263	65.9	4.3
2	#5925.00	58.4 AV	68.2	-9.8	1.08 H	263	54.1	4.3
3	*5955.00	116.3 PK			1.08 H	263	111.8	4.5
4	*5955.00	105.6 AV			1.08 H	263	101.1	4.5
5	11910.00	50.1 PK	74.0	-23.9	1.67 H	105	37.9	12.2
6	11910.00	39.9 AV	54.0	-14.1	1.67 H	105	27.7	12.2
7	17865.00	56.1 PK	74.0	-17.9	1.01 H	49	34.2	21.9
8	17865.00	45.0 AV	54.0	-9.0	1.01 H	49	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.0 PK	88.2	-19.2	1.19 V	296	64.7	4.3
2	#5925.00	57.7 AV	68.2	-10.5	1.19 V	296	53.4	4.3
3	*5955.00	115.0 PK			1.19 V	296	110.5	4.5
4	*5955.00	103.2 AV			1.19 V	296	98.7	4.5
5	11910.00	57.5 PK	74.0	-16.5	2.63 V	148	45.3	12.2
6	11910.00	46.1 AV	54.0	-7.9	2.63 V	148	33.9	12.2
7	17865.00	56.2 PK	74.0	-17.8	1.93 V	33	34.3	21.9
8	17865.00	45.5 AV	54.0	-8.5	1.93 V	33	23.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.7 PK			1.08 H	245	111.9	4.8
2	*6195.00	105.7 AV			1.08 H	245	100.9	4.8
3	12390.00	49.8 PK	74.0	-24.2	1.67 H	125	37.5	12.3
4	12390.00	39.5 AV	54.0	-14.5	1.67 H	125	27.2	12.3
5	18585.00	55.8 PK	74.0	-18.2	1.09 H	21	60.8	-5.0
6	18585.00	44.4 AV	54.0	-9.6	1.09 H	21	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.2 PK			1.23 V	291	110.4	4.8
2	*6195.00	103.3 AV			1.23 V	291	98.5	4.8
3	12390.00	57.8 PK	74.0	-16.2	2.55 V	135	45.5	12.3
4	12390.00	46.6 AV	54.0	-7.4	2.55 V	135	34.3	12.3
5	18585.00	56.8 PK	74.0	-17.2	1.93 V	10	61.8	-5.0
6	18585.00	45.6 AV	54.0	-8.4	1.93 V	10	50.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.8 PK			1.02 H	206	109.4	6.4
2	*6415.00	105.3 AV			1.02 H	206	98.9	6.4
3	#12830.00	49.5 PK	88.2	-38.7	1.69 H	119	36.5	13.0
4	#12830.00	39.1 AV	68.2	-29.1	1.69 H	119	26.1	13.0
5	19245.00	56.0 PK	74.0	-18.0	1.00 H	26	59.8	-3.8
6	19245.00	44.5 AV	54.0	-9.5	1.00 H	26	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.9 PK			1.20 V	300	108.5	6.4
2	*6415.00	103.0 AV			1.20 V	300	96.6	6.4
3	#12830.00	57.5 PK	88.2	-30.7	2.64 V	151	44.5	13.0
4	#12830.00	46.3 AV	68.2	-21.9	2.64 V	151	33.3	13.0
5	19245.00	56.5 PK	74.0	-17.5	1.86 V	10	60.3	-3.8
6	19245.00	45.8 AV	54.0	-8.2	1.86 V	10	49.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.8 PK			3.66 H	91	93.4	6.4
2	*6435.00	89.7 AV			3.66 H	91	83.3	6.4
3	#12870.00	49.8 PK	88.2	-38.4	1.74 H	103	36.8	13.0
4	#12870.00	39.8 AV	68.2	-28.4	1.74 H	103	26.8	13.0
5	19305.00	56.2 PK	74.0	-17.8	1.03 H	15	59.9	-3.7
6	19305.00	44.6 AV	54.0	-9.4	1.03 H	15	48.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.8 PK			1.16 V	219	93.4	6.4
2	*6435.00	88.5 AV			1.16 V	219	82.1	6.4
3	#12870.00	57.9 PK	88.2	-30.3	2.54 V	153	44.9	13.0
4	#12870.00	46.6 AV	68.2	-21.6	2.54 V	153	33.6	13.0
5	19305.00	57.5 PK	74.0	-16.5	1.99 V	32	61.2	-3.7
6	19305.00	46.2 AV	54.0	-7.8	1.99 V	32	49.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.9 PK			1.01 H	206	110.3	6.6
2	*6475.00	106.1 AV			1.01 H	206	99.5	6.6
3	#12950.00	50.0 PK	88.2	-38.2	1.69 H	108	36.9	13.1
4	#12950.00	39.8 AV	68.2	-28.4	1.69 H	108	26.7	13.1
5	19425.00	55.5 PK	74.0	-18.5	1.08 H	29	59.3	-3.8
6	19425.00	44.5 AV	54.0	-9.5	1.08 H	29	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.0 PK			1.14 V	283	108.4	6.6
2	*6475.00	103.3 AV			1.14 V	283	96.7	6.6
3	#12950.00	57.3 PK	88.2	-30.9	2.64 V	143	44.2	13.1
4	#12950.00	46.2 AV	68.2	-22.0	2.64 V	143	33.1	13.1
5	19425.00	57.5 PK	74.0	-16.5	1.84 V	36	61.3	-3.8
6	19425.00	46.4 AV	54.0	-7.6	1.84 V	36	50.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.3 PK			3.27 H	91	92.4	6.9
2	*6515.00	89.4 AV			3.27 H	91	82.5	6.9
3	#13030.00	50.3 PK	88.2	-37.9	1.71 H	125	37.1	13.2
4	#13030.00	39.8 AV	68.2	-28.4	1.71 H	125	26.6	13.2
5	19545.00	56.7 PK	74.0	-17.3	1.00 H	45	60.8	-4.1
6	19545.00	44.9 AV	54.0	-9.1	1.00 H	45	49.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.8 PK			1.16 V	233	93.9	6.9
2	*6515.00	89.5 AV			1.16 V	233	82.6	6.9
3	#13030.00	58.0 PK	88.2	-30.2	2.55 V	133	44.8	13.2
4	#13030.00	46.4 AV	68.2	-21.8	2.55 V	133	33.2	13.2
5	19545.00	57.8 PK	74.0	-16.2	1.97 V	20	61.9	-4.1
6	19545.00	46.4 AV	54.0	-7.6	1.97 V	20	50.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.12 H	204	110.7	6.9
2	*6535.00	107.0 AV			1.12 H	204	100.1	6.9
3	#13070.00	50.4 PK	88.2	-37.8	1.67 H	116	37.2	13.2
4	#13070.00	39.9 AV	68.2	-28.3	1.67 H	116	26.7	13.2
5	19605.00	56.4 PK	74.0	-17.6	1.01 H	35	60.4	-4.0
6	19605.00	44.9 AV	54.0	-9.1	1.01 H	35	48.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.3 PK			1.17 V	286	108.4	6.9
2	*6535.00	103.6 AV			1.17 V	286	96.7	6.9
3	#13070.00	57.0 PK	88.2	-31.2	2.64 V	139	43.8	13.2
4	#13070.00	45.8 AV	68.2	-22.4	2.64 V	139	32.6	13.2
5	19605.00	56.8 PK	74.0	-17.2	1.90 V	17	60.8	-4.0
6	19605.00	45.6 AV	54.0	-8.4	1.90 V	17	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.8 PK			1.11 H	202	110.6	7.2
2	*6695.00	106.5 AV			1.11 H	202	99.3	7.2
3	13390.00	49.7 PK	74.0	-24.3	1.73 H	114	35.7	14.0
4	13390.00	39.3 AV	54.0	-14.7	1.73 H	114	25.3	14.0
5	20085.00	55.8 PK	74.0	-18.2	1.00 H	45	59.3	-3.5
6	20085.00	44.8 AV	54.0	-9.2	1.00 H	45	48.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.0 PK			1.19 V	297	107.8	7.2
2	*6695.00	103.3 AV			1.19 V	297	96.1	7.2
3	13390.00	57.2 PK	74.0	-16.8	2.58 V	143	43.2	14.0
4	13390.00	45.7 AV	54.0	-8.3	2.58 V	143	31.7	14.0
5	20085.00	57.4 PK	74.0	-16.6	1.86 V	35	60.9	-3.5
6	20085.00	46.4 AV	54.0	-7.6	1.86 V	35	49.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			1.12 H	207	111.2	7.2
2	*6855.00	106.9 AV			1.12 H	207	99.7	7.2
3	#13710.00	50.3 PK	88.2	-37.9	1.64 H	111	35.1	15.2
4	#13710.00	40.0 AV	68.2	-28.2	1.64 H	111	24.8	15.2
5	20565.00	56.2 PK	74.0	-17.8	1.00 H	21	59.5	-3.3
6	20565.00	44.8 AV	54.0	-9.2	1.00 H	21	48.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.0 PK			1.19 V	295	107.8	7.2
2	*6855.00	103.1 AV			1.19 V	295	95.9	7.2
3	#13710.00	57.8 PK	88.2	-30.4	2.54 V	140	42.6	15.2
4	#13710.00	46.6 AV	68.2	-21.6	2.54 V	140	31.4	15.2
5	20565.00	57.5 PK	74.0	-16.5	1.90 V	12	60.8	-3.3
6	20565.00	46.2 AV	54.0	-7.8	1.90 V	12	49.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	98.3 PK			2.84 H	94	91.1	7.2
2	*6875.00	88.3 AV			2.84 H	94	81.1	7.2
3	#13750.00	49.9 PK	88.2	-38.3	1.68 H	108	34.8	15.1
4	#13750.00	39.8 AV	68.2	-28.4	1.68 H	108	24.7	15.1
5	20625.00	56.8 PK	74.0	-17.2	1.05 H	18	60.1	-3.3
6	20625.00	45.0 AV	54.0	-9.0	1.05 H	18	48.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.1 PK			1.14 V	226	92.9	7.2
2	*6875.00	88.6 AV			1.14 V	226	81.4	7.2
3	#13750.00	58.5 PK	88.2	-29.7	2.60 V	141	43.4	15.1
4	#13750.00	46.9 AV	68.2	-21.3	2.60 V	141	31.8	15.1
5	20625.00	57.4 PK	74.0	-16.6	1.96 V	23	60.7	-3.3
6	20625.00	46.2 AV	54.0	-7.8	1.96 V	23	49.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.8 PK			1.39 H	25	90.8	8.0
2	*6995.00	87.7 AV			1.39 H	25	79.7	8.0
3	#13990.00	50.3 PK	88.2	-37.9	1.76 H	128	34.7	15.6
4	#13990.00	40.0 AV	68.2	-28.2	1.76 H	128	24.4	15.6
5	20985.00	56.3 PK	74.0	-17.7	1.05 H	43	59.1	-2.8
6	20985.00	45.0 AV	54.0	-9.0	1.05 H	43	47.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.3 PK			1.17 V	221	92.3	8.0
2	*6995.00	89.0 AV			1.17 V	221	81.0	8.0
3	#13990.00	57.8 PK	88.2	-30.4	2.53 V	151	42.2	15.6
4	#13990.00	46.5 AV	68.2	-21.7	2.53 V	151	30.9	15.6
5	20985.00	57.5 PK	74.0	-16.5	1.92 V	28	60.3	-2.8
6	20985.00	46.2 AV	54.0	-7.8	1.92 V	28	49.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.1 PK			1.31 H	305	91.6	9.5
2	*7115.00	90.2 AV			1.31 H	305	80.7	9.5
3	#7125.00	85.2 PK	88.2	-3.0	1.31 H	305	75.8	9.4
4	#7125.00	57.0 AV	68.2	-11.2	1.31 H	305	47.6	9.4
5	7250.00	56.0 PK	74.0	-18.0	1.31 H	305	47.3	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.31 H	305	34.7	8.7
7	#14230.00	49.4 PK	88.2	-38.8	1.78 H	119	34.1	15.3
8	#14230.00	39.4 AV	68.2	-28.8	1.78 H	119	24.1	15.3
9	21345.00	56.7 PK	74.0	-17.3	1.05 H	23	58.3	-1.6
10	21345.00	44.9 AV	54.0	-9.1	1.05 H	23	46.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.3 PK			1.15 V	223	90.8	9.5
2	*7115.00	89.0 AV			1.15 V	223	79.5	9.5
3	#7125.00	84.5 PK	88.2	-3.7	1.15 V	223	75.1	9.4
4	#7125.00	62.7 AV	68.2	-5.5	1.15 V	223	53.3	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.15 V	223	46.9	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.15 V	223	34.8	8.7
7	#14230.00	57.0 PK	88.2	-31.2	2.56 V	146	41.7	15.3
8	#14230.00	45.9 AV	68.2	-22.3	2.56 V	146	30.6	15.3
9	21345.00	56.9 PK	74.0	-17.1	1.98 V	31	58.5	-1.6
10	21345.00	45.7 AV	54.0	-8.3	1.98 V	31	47.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.5 PK	88.2	-10.7	4.00 H	79	73.2	4.3
2	#5925.00	65.5 AV	68.2	-2.7	4.00 H	79	61.2	4.3
3	*5965.00	114.2 PK			4.00 H	79	109.8	4.4
4	*5965.00	102.1 AV			4.00 H	79	97.7	4.4
5	11930.00	50.0 PK	74.0	-24.0	1.66 H	120	37.9	12.1
6	11930.00	39.8 AV	54.0	-14.2	1.66 H	120	27.7	12.1
7	17895.00	56.8 PK	74.0	-17.2	1.01 H	22	34.5	22.3
8	17895.00	45.3 AV	54.0	-8.7	1.01 H	22	23.0	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.7 PK	88.2	-12.5	1.15 V	286	71.4	4.3
2	#5925.00	64.1 AV	68.2	-4.1	1.15 V	286	59.8	4.3
3	*5965.00	109.0 PK			1.15 V	286	104.6	4.4
4	*5965.00	98.1 AV			1.15 V	286	93.7	4.4
5	11930.00	57.0 PK	74.0	-17.0	2.56 V	143	44.9	12.1
6	11930.00	45.6 AV	54.0	-8.4	2.56 V	143	33.5	12.1
7	17895.00	57.1 PK	74.0	-16.9	1.91 V	34	34.8	22.3
8	17895.00	46.1 AV	54.0	-7.9	1.91 V	34	23.8	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.0 PK			1.09 H	255	109.1	4.9
2	*6205.00	103.0 AV			1.09 H	255	98.1	4.9
3	12410.00	49.9 PK	74.0	-24.1	1.72 H	113	37.6	12.3
4	12410.00	39.3 AV	54.0	-14.7	1.72 H	113	27.0	12.3
5	18615.00	56.1 PK	74.0	-17.9	1.01 H	28	61.0	-4.9
6	18615.00	45.1 AV	54.0	-8.9	1.01 H	28	50.0	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	110.5 PK			1.13 V	297	105.6	4.9
2	*6205.00	98.7 AV			1.13 V	297	93.8	4.9
3	12410.00	56.8 PK	74.0	-17.2	2.53 V	131	44.5	12.3
4	12410.00	45.8 AV	54.0	-8.2	2.53 V	131	33.5	12.3
5	18615.00	56.5 PK	74.0	-17.5	1.87 V	26	61.4	-4.9
6	18615.00	45.5 AV	54.0	-8.5	1.87 V	26	50.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.4 PK			1.02 H	206	107.0	6.4
2	*6405.00	102.3 AV			1.02 H	206	95.9	6.4
3	#12810.00	50.5 PK	88.2	-37.7	1.67 H	113	37.7	12.8
4	#12810.00	39.9 AV	68.2	-28.3	1.67 H	113	27.1	12.8
5	19215.00	56.3 PK	74.0	-17.7	1.06 H	23	60.0	-3.7
6	19215.00	44.8 AV	54.0	-9.2	1.06 H	23	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.6 PK			1.17 V	310	104.2	6.4
2	*6405.00	98.6 AV			1.17 V	310	92.2	6.4
3	#12810.00	57.0 PK	88.2	-31.2	2.55 V	145	44.2	12.8
4	#12810.00	45.6 AV	68.2	-22.6	2.55 V	145	32.8	12.8
5	19215.00	57.0 PK	74.0	-17.0	1.87 V	37	60.7	-3.7
6	19215.00	46.1 AV	54.0	-7.9	1.87 V	37	49.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	100.6 PK			3.78 H	66	94.2	6.4
2	*6445.00	88.7 AV			3.78 H	66	82.3	6.4
3	#12890.00	50.0 PK	88.2	-38.2	1.75 H	121	37.0	13.0
4	#12890.00	39.7 AV	68.2	-28.5	1.75 H	121	26.7	13.0
5	19335.00	56.7 PK	74.0	-17.3	1.00 H	31	60.4	-3.7
6	19335.00	45.1 AV	54.0	-8.9	1.00 H	31	48.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	99.9 PK			1.18 V	224	93.5	6.4
2	*6445.00	89.3 AV			1.18 V	224	82.9	6.4
3	#12890.00	57.7 PK	88.2	-30.5	2.52 V	136	44.7	13.0
4	#12890.00	46.2 AV	68.2	-22.0	2.52 V	136	33.2	13.0
5	19335.00	56.9 PK	74.0	-17.1	1.97 V	19	60.6	-3.7
6	19335.00	46.0 AV	54.0	-8.0	1.97 V	19	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.8 PK			1.00 H	212	107.1	6.7
2	*6485.00	102.8 AV			1.00 H	212	96.1	6.7
3	#12970.00	50.0 PK	88.2	-38.2	1.73 H	109	36.9	13.1
4	#12970.00	40.0 AV	68.2	-28.2	1.73 H	109	26.9	13.1
5	19455.00	56.4 PK	74.0	-17.6	1.04 H	46	60.3	-3.9
6	19455.00	45.0 AV	54.0	-9.0	1.04 H	46	48.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.5 PK			1.17 V	305	103.8	6.7
2	*6485.00	98.9 AV			1.17 V	305	92.2	6.7
3	#12970.00	56.6 PK	88.2	-31.6	2.57 V	150	43.5	13.1
4	#12970.00	45.7 AV	68.2	-22.5	2.57 V	150	32.6	13.1
5	19455.00	57.4 PK	74.0	-16.6	1.82 V	32	61.3	-3.9
6	19455.00	46.1 AV	54.0	-7.9	1.82 V	32	50.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	99.2 PK			3.82 H	59	92.3	6.9
2	*6525.00	88.2 AV			3.82 H	59	81.3	6.9
3	#13050.00	50.2 PK	88.2	-38.0	1.75 H	101	37.0	13.2
4	#13050.00	40.2 AV	68.2	-28.0	1.75 H	101	27.0	13.2
5	19575.00	57.0 PK	74.0	-17.0	1.06 H	40	61.1	-4.1
6	19575.00	45.4 AV	54.0	-8.6	1.06 H	40	49.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	100.6 PK			1.14 V	230	93.7	6.9
2	*6525.00	89.8 AV			1.14 V	230	82.9	6.9
3	#13050.00	57.7 PK	88.2	-30.5	2.53 V	141	44.5	13.2
4	#13050.00	46.5 AV	68.2	-21.7	2.53 V	141	33.3	13.2
5	19575.00	57.3 PK	74.0	-16.7	1.97 V	40	61.4	-4.1
6	19575.00	46.0 AV	54.0	-8.0	1.97 V	40	50.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	115.0 PK			1.00 H	205	108.1	6.9
2	*6565.00	103.1 AV			1.00 H	205	96.2	6.9
3	#13130.00	50.2 PK	88.2	-38.0	1.73 H	104	37.0	13.2
4	#13130.00	39.9 AV	68.2	-28.3	1.73 H	104	26.7	13.2
5	19695.00	55.8 PK	74.0	-18.2	1.07 H	39	59.7	-3.9
6	19695.00	44.6 AV	54.0	-9.4	1.07 H	39	48.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.0 PK			1.16 V	283	103.1	6.9
2	*6565.00	98.5 AV			1.16 V	283	91.6	6.9
3	#13130.00	57.1 PK	88.2	-31.1	2.57 V	152	43.9	13.2
4	#13130.00	46.0 AV	68.2	-22.2	2.57 V	152	32.8	13.2
5	19695.00	56.7 PK	74.0	-17.3	1.88 V	33	60.6	-3.9
6	19695.00	45.8 AV	54.0	-8.2	1.88 V	33	49.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.2 PK			1.14 H	203	107.0	7.2
2	*6685.00	103.1 AV			1.14 H	203	95.9	7.2
3	13370.00	49.4 PK	74.0	-24.6	1.68 H	115	35.4	14.0
4	13370.00	39.2 AV	54.0	-14.8	1.68 H	115	25.2	14.0
5	20055.00	56.3 PK	74.0	-17.7	1.05 H	46	59.8	-3.5
6	20055.00	44.7 AV	54.0	-9.3	1.05 H	46	48.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.9 PK			1.13 V	310	103.7	7.2
2	*6685.00	99.0 AV			1.13 V	310	91.8	7.2
3	13370.00	57.6 PK	74.0	-16.4	2.62 V	122	43.6	14.0
4	13370.00	46.3 AV	54.0	-7.7	2.62 V	122	32.3	14.0
5	20055.00	56.3 PK	74.0	-17.7	1.83 V	7	59.8	-3.5
6	20055.00	45.5 AV	54.0	-8.5	1.83 V	7	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.1 PK			1.06 H	210	107.0	7.1
2	*6845.00	102.5 AV			1.06 H	210	95.4	7.1
3	#13690.00	50.5 PK	88.2	-37.7	1.69 H	112	35.4	15.1
4	#13690.00	40.0 AV	68.2	-28.2	1.69 H	112	24.9	15.1
5	20535.00	55.9 PK	74.0	-18.1	1.06 H	37	59.1	-3.2
6	20535.00	44.6 AV	54.0	-9.4	1.06 H	37	47.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.2 PK			1.17 V	272	103.1	7.1
2	*6845.00	98.4 AV			1.17 V	272	91.3	7.1
3	#13690.00	57.3 PK	88.2	-30.9	2.65 V	142	42.2	15.1
4	#13690.00	46.0 AV	68.2	-22.2	2.65 V	142	30.9	15.1
5	20535.00	57.4 PK	74.0	-16.6	1.88 V	7	60.6	-3.2
6	20535.00	46.3 AV	54.0	-7.7	1.88 V	7	49.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	98.5 PK			1.00 H	25	91.3	7.2
2	*6885.00	87.0 AV			1.00 H	25	79.8	7.2
3	#13770.00	50.0 PK	88.2	-38.2	1.74 H	123	35.0	15.0
4	#13770.00	39.7 AV	68.2	-28.5	1.74 H	123	24.7	15.0
5	20655.00	56.8 PK	74.0	-17.2	1.00 H	38	60.1	-3.3
6	20655.00	45.1 AV	54.0	-8.9	1.00 H	38	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	100.1 PK			1.13 V	229	92.9	7.2
2	*6885.00	89.5 AV			1.13 V	229	82.3	7.2
3	#13770.00	58.1 PK	88.2	-30.1	2.53 V	138	43.1	15.0
4	#13770.00	46.5 AV	68.2	-21.7	2.53 V	138	31.5	15.0
5	20655.00	57.6 PK	74.0	-16.4	1.98 V	18	60.9	-3.3
6	20655.00	46.3 AV	54.0	-7.7	1.98 V	18	49.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	97.0 PK			1.07 H	21	89.3	7.7
2	*6965.00	85.5 AV			1.07 H	21	77.8	7.7
3	#13930.00	49.5 PK	88.2	-38.7	1.68 H	102	34.2	15.3
4	#13930.00	39.3 AV	68.2	-28.9	1.68 H	102	24.0	15.3
5	20895.00	56.7 PK	74.0	-17.3	1.05 H	38	59.4	-2.7
6	20895.00	45.2 AV	54.0	-8.8	1.05 H	38	47.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	100.3 PK			1.18 V	214	92.6	7.7
2	*6965.00	89.6 AV			1.18 V	214	81.9	7.7
3	#13930.00	57.5 PK	88.2	-30.7	2.56 V	126	42.2	15.3
4	#13930.00	46.0 AV	68.2	-22.2	2.56 V	126	30.7	15.3
5	20895.00	57.0 PK	74.0	-17.0	1.98 V	25	59.7	-2.7
6	20895.00	46.0 AV	54.0	-8.0	1.98 V	25	48.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	102.0 PK			1.09 H	305	92.8	9.2
2	*7085.00	91.2 AV			1.09 H	305	82.0	9.2
3	#7125.00	56.5 PK	88.2	-31.7	1.09 H	305	47.1	9.4
4	#7125.00	45.1 AV	68.2	-23.1	1.09 H	305	35.7	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.09 H	305	46.5	8.7
6	7250.00	43.8 AV	54.0	-10.2	1.09 H	305	35.1	8.7
7	#14170.00	50.3 PK	88.2	-37.9	1.71 H	130	35.1	15.2
8	#14170.00	39.8 AV	68.2	-28.4	1.71 H	130	24.6	15.2
9	21255.00	56.6 PK	74.0	-17.4	1.00 H	21	58.0	-1.4
10	21255.00	45.2 AV	54.0	-8.8	1.00 H	21	46.6	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	100.5 PK			1.19 V	222	91.3	9.2
2	*7085.00	89.7 AV			1.19 V	222	80.5	9.2
3	#7125.00	56.3 PK	88.2	-31.9	1.19 V	222	46.9	9.4
4	#7125.00	44.5 AV	68.2	-23.7	1.19 V	222	35.1	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.19 V	222	46.0	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.19 V	222	34.7	8.7
7	#14170.00	57.1 PK	88.2	-31.1	2.52 V	149	41.9	15.2
8	#14170.00	46.0 AV	68.2	-22.2	2.52 V	149	30.8	15.2
9	21255.00	57.2 PK	74.0	-16.8	1.88 V	31	58.6	-1.4
10	21255.00	45.7 AV	54.0	-8.3	1.88 V	31	47.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.16 H	262	72.2	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.16 H	262	62.2	4.3
3	*5985.00	110.2 PK			1.16 H	262	105.8	4.4
4	*5985.00	97.8 AV			1.16 H	262	93.4	4.4
5	11970.00	50.0 PK	74.0	-24.0	1.69 H	119	37.8	12.2
6	11970.00	39.8 AV	54.0	-14.2	1.69 H	119	27.6	12.2
7	17955.00	56.6 PK	74.0	-17.4	1.07 H	21	33.2	23.4
8	17955.00	45.0 AV	54.0	-9.0	1.07 H	21	21.6	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.3 PK	88.2	-13.9	1.12 V	296	70.0	4.3
2	#5925.00	61.9 AV	68.2	-6.3	1.12 V	296	57.6	4.3
3	*5985.00	105.8 PK			1.12 V	296	101.4	4.4
4	*5985.00	94.0 AV			1.12 V	296	89.6	4.4
5	11970.00	57.5 PK	74.0	-16.5	2.65 V	142	45.3	12.2
6	11970.00	46.2 AV	54.0	-7.8	2.65 V	142	34.0	12.2
7	17955.00	57.1 PK	74.0	-16.9	1.81 V	12	33.7	23.4
8	17955.00	45.9 AV	54.0	-8.1	1.81 V	12	22.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.2 PK			1.17 H	247	107.2	5.0
2	*6225.00	100.0 AV			1.17 H	247	95.0	5.0
3	12450.00	49.4 PK	74.0	-24.6	1.67 H	111	37.1	12.3
4	12450.00	39.4 AV	54.0	-14.6	1.67 H	111	27.1	12.3
5	18675.00	55.4 PK	74.0	-18.6	1.06 H	23	60.3	-4.9
6	18675.00	44.4 AV	54.0	-9.6	1.06 H	23	49.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.5 PK			1.07 V	305	104.5	5.0
2	*6225.00	96.2 AV			1.07 V	305	91.2	5.0
3	12450.00	57.7 PK	74.0	-16.3	2.56 V	121	45.4	12.3
4	12450.00	46.5 AV	54.0	-7.5	2.56 V	121	34.2	12.3
5	18675.00	56.9 PK	74.0	-17.1	1.83 V	7	61.8	-4.9
6	18675.00	45.8 AV	54.0	-8.2	1.83 V	7	50.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.6 PK			1.03 H	206	105.4	6.2
2	*6385.00	100.1 AV			1.03 H	206	93.9	6.2
3	#12770.00	49.8 PK	88.2	-38.4	1.69 H	114	37.0	12.8
4	#12770.00	39.5 AV	68.2	-28.7	1.69 H	114	26.7	12.8
5	19155.00	56.0 PK	74.0	-18.0	1.00 H	20	59.8	-3.8
6	19155.00	44.8 AV	54.0	-9.2	1.00 H	20	48.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.0 PK			1.06 V	319	102.8	6.2
2	*6385.00	96.0 AV			1.06 V	319	89.8	6.2
3	#12770.00	57.6 PK	88.2	-30.6	2.58 V	141	44.8	12.8
4	#12770.00	46.3 AV	68.2	-21.9	2.58 V	141	33.5	12.8
5	19155.00	57.1 PK	74.0	-16.9	1.86 V	12	60.9	-3.8
6	19155.00	46.1 AV	54.0	-7.9	1.86 V	12	49.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.3 PK			1.00 H	205	105.8	6.5
2	*6465.00	101.4 AV			1.00 H	205	94.9	6.5
3	#12930.00	49.9 PK	88.2	-38.3	1.69 H	114	36.8	13.1
4	#12930.00	39.8 AV	68.2	-28.4	1.69 H	114	26.7	13.1
5	19395.00	56.4 PK	74.0	-17.6	1.08 H	26	60.1	-3.7
6	19395.00	44.8 AV	54.0	-9.2	1.08 H	26	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.3 PK			1.04 V	315	102.8	6.5
2	*6465.00	96.1 AV			1.04 V	315	89.6	6.5
3	#12930.00	57.7 PK	88.2	-30.5	2.54 V	139	44.6	13.1
4	#12930.00	46.4 AV	68.2	-21.8	2.54 V	139	33.3	13.1
5	19395.00	56.6 PK	74.0	-17.4	1.82 V	25	60.3	-3.7
6	19395.00	45.6 AV	54.0	-8.4	1.82 V	25	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.0 PK			1.16 H	26	94.1	6.9
2	*6545.00	89.1 AV			1.16 H	26	82.2	6.9
3	#13090.00	49.9 PK	88.2	-38.3	1.71 H	124	36.7	13.2
4	#13090.00	39.5 AV	68.2	-28.7	1.71 H	124	26.3	13.2
5	19635.00	56.7 PK	74.0	-17.3	1.00 H	18	60.7	-4.0
6	19635.00	45.1 AV	54.0	-8.9	1.00 H	18	49.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	98.7 PK			1.18 V	206	91.8	6.9
2	*6545.00	88.5 AV			1.18 V	206	81.6	6.9
3	#13090.00	57.9 PK	88.2	-30.3	2.57 V	129	44.7	13.2
4	#13090.00	46.4 AV	68.2	-21.8	2.57 V	129	33.2	13.2
5	19635.00	57.0 PK	74.0	-17.0	1.88 V	25	61.0	-4.0
6	19635.00	45.9 AV	54.0	-8.1	1.88 V	25	49.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.6 PK			1.08 H	210	105.7	6.9
2	*6625.00	100.6 AV			1.08 H	210	93.7	6.9
3	13250.00	49.2 PK	74.0	-24.8	1.64 H	103	35.6	13.6
4	13250.00	39.2 AV	54.0	-14.8	1.64 H	103	25.6	13.6
5	19875.00	55.9 PK	74.0	-18.1	1.06 H	46	59.4	-3.5
6	19875.00	44.4 AV	54.0	-9.6	1.06 H	46	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.8 PK			1.02 V	319	102.9	6.9
2	*6625.00	96.6 AV			1.02 V	319	89.7	6.9
3	13250.00	57.7 PK	74.0	-16.3	2.59 V	123	44.1	13.6
4	13250.00	46.6 AV	54.0	-7.4	2.59 V	123	33.0	13.6
5	19875.00	56.5 PK	74.0	-17.5	1.88 V	13	60.0	-3.5
6	19875.00	45.6 AV	54.0	-8.4	1.88 V	13	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.9 PK			1.09 H	205	105.7	7.2
2	*6705.00	100.2 AV			1.09 H	205	93.0	7.2
3	#13410.00	49.3 PK	88.2	-38.9	1.73 H	129	35.1	14.2
4	#13410.00	39.2 AV	68.2	-29.0	1.73 H	129	25.0	14.2
5	20115.00	56.0 PK	74.0	-18.0	1.02 H	46	59.5	-3.5
6	20115.00	44.9 AV	54.0	-9.1	1.02 H	46	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.1 PK			1.09 V	289	102.9	7.2
2	*6705.00	96.7 AV			1.09 V	289	89.5	7.2
3	#13410.00	57.6 PK	88.2	-30.6	2.60 V	124	43.4	14.2
4	#13410.00	46.2 AV	68.2	-22.0	2.60 V	124	32.0	14.2
5	20115.00	57.0 PK	74.0	-17.0	1.92 V	30	60.5	-3.5
6	20115.00	45.9 AV	54.0	-8.1	1.92 V	30	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.2 PK			1.00 H	204	105.2	7.0
2	*6785.00	100.4 AV			1.00 H	204	93.4	7.0
3	#13570.00	50.2 PK	88.2	-38.0	1.63 H	117	35.6	14.6
4	#13570.00	40.0 AV	68.2	-28.2	1.63 H	117	25.4	14.6
5	20355.00	56.0 PK	74.0	-18.0	1.07 H	32	59.1	-3.1
6	20355.00	45.0 AV	54.0	-9.0	1.07 H	32	48.1	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.9 PK			1.02 V	290	101.9	7.0
2	*6785.00	95.9 AV			1.02 V	290	88.9	7.0
3	#13570.00	57.6 PK	88.2	-30.6	2.54 V	139	43.0	14.6
4	#13570.00	46.3 AV	68.2	-21.9	2.54 V	139	31.7	14.6
5	20355.00	56.6 PK	74.0	-17.4	1.88 V	24	59.7	-3.1
6	20355.00	45.9 AV	54.0	-8.1	1.88 V	24	49.0	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	99.9 PK			1.00 H	15	92.7	7.2
2	*6865.00	87.4 AV			1.00 H	15	80.2	7.2
3	#13730.00	49.7 PK	88.2	-38.5	1.74 H	110	34.6	15.1
4	#13730.00	39.5 AV	68.2	-28.7	1.74 H	110	24.4	15.1
5	20595.00	56.7 PK	74.0	-17.3	1.00 H	25	60.0	-3.3
6	20595.00	44.8 AV	54.0	-9.2	1.00 H	25	48.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	98.7 PK			1.16 V	230	91.5	7.2
2	*6865.00	88.4 AV			1.16 V	230	81.2	7.2
3	#13730.00	57.3 PK	88.2	-30.9	2.51 V	155	42.2	15.1
4	#13730.00	45.9 AV	68.2	-22.3	2.51 V	155	30.8	15.1
5	20595.00	56.6 PK	74.0	-17.4	1.92 V	19	59.9	-3.3
6	20595.00	45.7 AV	54.0	-8.3	1.92 V	19	49.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	97.6 PK			1.07 H	19	90.1	7.5
2	*6945.00	86.4 AV			1.07 H	19	78.9	7.5
3	#13890.00	50.2 PK	88.2	-38.0	1.76 H	125	35.0	15.2
4	#13890.00	40.2 AV	68.2	-28.0	1.76 H	125	25.0	15.2
5	20835.00	56.5 PK	74.0	-17.5	1.01 H	21	59.4	-2.9
6	20835.00	45.0 AV	54.0	-9.0	1.01 H	21	47.9	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	98.1 PK			1.13 V	227	90.6	7.5
2	*6945.00	87.6 AV			1.13 V	227	80.1	7.5
3	#13890.00	58.0 PK	88.2	-30.2	2.55 V	144	42.8	15.2
4	#13890.00	46.4 AV	68.2	-21.8	2.55 V	144	31.2	15.2
5	20835.00	57.7 PK	74.0	-16.3	1.96 V	44	60.6	-2.9
6	20835.00	46.4 AV	54.0	-7.6	1.96 V	44	49.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.6 PK			1.26 H	308	93.2	8.4
2	*7025.00	89.6 AV			1.26 H	308	81.2	8.4
3	#7125.00	57.2 PK	88.2	-31.0	1.26 H	308	47.8	9.4
4	#7125.00	52.9 AV	68.2	-15.3	1.26 H	308	43.5	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.26 H	308	46.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.26 H	308	34.7	8.7
7	#14050.00	49.5 PK	88.2	-38.7	1.69 H	119	34.0	15.5
8	#14050.00	39.5 AV	68.2	-28.7	1.69 H	119	24.0	15.5
9	21075.00	57.1 PK	74.0	-16.9	1.02 H	32	59.3	-2.2
10	21075.00	45.5 AV	54.0	-8.5	1.02 H	32	47.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	98.5 PK			1.18 V	222	90.1	8.4
2	*7025.00	88.1 AV			1.18 V	222	79.7	8.4
3	#7125.00	56.8 PK	88.2	-31.4	1.18 V	222	47.4	9.4
4	#7125.00	45.0 AV	68.2	-23.2	1.18 V	222	35.6	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.18 V	222	46.8	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.18 V	222	34.8	8.7
7	#14050.00	57.6 PK	88.2	-30.6	2.58 V	154	42.1	15.5
8	#14050.00	46.5 AV	68.2	-21.7	2.58 V	154	31.0	15.5
9	21075.00	56.9 PK	74.0	-17.1	1.91 V	17	59.1	-2.2
10	21075.00	45.9 AV	54.0	-8.1	1.91 V	17	48.1	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	1.08 H	260	74.5	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.08 H	260	62.3	4.3
3	*6025.00	107.4 PK			1.08 H	260	103.2	4.2
4	*6025.00	95.8 AV			1.08 H	260	91.6	4.2
5	12050.00	49.9 PK	74.0	-24.1	1.71 H	120	37.5	12.4
6	12050.00	39.6 AV	54.0	-14.4	1.71 H	120	27.2	12.4
7	18075.00	56.1 PK	74.0	-17.9	1.08 H	44	60.8	-4.7
8	18075.00	44.9 AV	54.0	-9.1	1.08 H	44	49.6	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.6 PK	88.2	-12.6	1.16 V	293	71.3	4.3
2	#5925.00	64.5 AV	68.2	-3.7	1.16 V	293	60.2	4.3
3	*6025.00	105.1 PK			1.16 V	293	100.9	4.2
4	*6025.00	91.8 AV			1.16 V	293	87.6	4.2
5	12050.00	57.5 PK	74.0	-16.5	2.56 V	123	45.1	12.4
6	12050.00	46.2 AV	54.0	-7.8	2.56 V	123	33.8	12.4
7	18075.00	57.5 PK	74.0	-16.5	1.91 V	37	62.2	-4.7
8	18075.00	46.2 AV	54.0	-7.8	1.91 V	37	50.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.8 PK			1.10 H	244	105.0	4.8
2	*6185.00	97.4 AV			1.10 H	244	92.6	4.8
3	12370.00	50.1 PK	74.0	-23.9	1.67 H	117	37.8	12.3
4	12370.00	39.6 AV	54.0	-14.4	1.67 H	117	27.3	12.3
5	18555.00	56.3 PK	74.0	-17.7	1.08 H	35	61.2	-4.9
6	18555.00	45.0 AV	54.0	-9.0	1.08 H	35	49.9	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.0 PK			1.22 V	306	102.2	4.8
2	*6185.00	93.5 AV			1.22 V	306	88.7	4.8
3	12370.00	57.1 PK	74.0	-16.9	2.61 V	127	44.8	12.3
4	12370.00	46.1 AV	54.0	-7.9	2.61 V	127	33.8	12.3
5	18555.00	57.0 PK	74.0	-17.0	1.86 V	6	61.9	-4.9
6	18555.00	46.0 AV	54.0	-8.0	1.86 V	6	50.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.3 PK			1.02 H	206	103.2	6.1
2	*6345.00	97.8 AV			1.02 H	206	91.7	6.1
3	12690.00	50.2 PK	74.0	-23.8	1.69 H	127	37.3	12.9
4	12690.00	39.8 AV	54.0	-14.2	1.69 H	127	26.9	12.9
5	19035.00	55.8 PK	74.0	-18.2	1.00 H	40	59.7	-3.9
6	19035.00	44.5 AV	54.0	-9.5	1.00 H	40	48.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.3 PK			1.18 V	295	101.2	6.1
2	*6345.00	93.7 AV			1.18 V	295	87.6	6.1
3	12690.00	57.2 PK	74.0	-16.8	2.64 V	141	44.3	12.9
4	12690.00	45.8 AV	54.0	-8.2	2.64 V	141	32.9	12.9
5	19035.00	57.0 PK	74.0	-17.0	1.92 V	17	60.9	-3.9
6	19035.00	46.1 AV	54.0	-7.9	1.92 V	17	50.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.2 PK			1.08 H	203	102.4	6.8
2	*6505.00	97.5 AV			1.08 H	203	90.7	6.8
3	#13010.00	49.3 PK	88.2	-38.9	1.70 H	130	36.1	13.2
4	#13010.00	39.2 AV	68.2	-29.0	1.70 H	130	26.0	13.2
5	19515.00	56.6 PK	74.0	-17.4	1.07 H	48	60.7	-4.1
6	19515.00	45.0 AV	54.0	-9.0	1.07 H	48	49.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.3 PK			1.24 V	309	100.5	6.8
2	*6505.00	93.8 AV			1.24 V	309	87.0	6.8
3	#13010.00	56.6 PK	88.2	-31.6	2.61 V	128	43.4	13.2
4	#13010.00	45.6 AV	68.2	-22.6	2.61 V	128	32.4	13.2
5	19515.00	56.4 PK	74.0	-17.6	1.83 V	17	60.5	-4.1
6	19515.00	45.4 AV	54.0	-8.6	1.83 V	17	49.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.3 PK			1.04 H	211	102.1	7.2
2	*6665.00	97.5 AV			1.04 H	211	90.3	7.2
3	13330.00	49.9 PK	74.0	-24.1	1.72 H	129	36.1	13.8
4	13330.00	39.6 AV	54.0	-14.4	1.72 H	129	25.8	13.8
5	19995.00	56.3 PK	74.0	-17.7	1.00 H	26	59.9	-3.6
6	19995.00	44.9 AV	54.0	-9.1	1.00 H	26	48.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.7 PK			1.25 V	321	99.5	7.2
2	*6665.00	93.2 AV			1.25 V	321	86.0	7.2
3	13330.00	57.8 PK	74.0	-16.2	2.58 V	144	44.0	13.8
4	13330.00	46.3 AV	54.0	-7.7	2.58 V	144	32.5	13.8
5	19995.00	57.0 PK	74.0	-17.0	1.84 V	31	60.6	-3.6
6	19995.00	45.9 AV	54.0	-8.1	1.84 V	31	49.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	99.4 PK			1.01 H	26	92.3	7.1
2	*6825.00	87.4 AV			1.01 H	26	80.3	7.1
3	#13650.00	50.4 PK	88.2	-37.8	1.70 H	109	35.5	14.9
4	#13650.00	39.9 AV	68.2	-28.3	1.70 H	109	25.0	14.9
5	20475.00	56.9 PK	74.0	-17.1	1.00 H	20	60.1	-3.2
6	20475.00	45.2 AV	54.0	-8.8	1.00 H	20	48.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	98.4 PK			1.18 V	212	91.3	7.1
2	*6825.00	87.0 AV			1.18 V	212	79.9	7.1
3	#13650.00	57.8 PK	88.2	-30.4	2.58 V	140	42.9	14.9
4	#13650.00	46.4 AV	68.2	-21.8	2.58 V	140	31.5	14.9
5	20475.00	57.1 PK	74.0	-16.9	1.98 V	35	60.3	-3.2
6	20475.00	45.8 AV	54.0	-8.2	1.98 V	35	49.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	100.4 PK			1.11 H	304	92.6	7.8
2	*6985.00	88.6 AV			1.11 H	304	80.8	7.8
3	#7125.00	65.3 PK	88.2	-22.9	1.11 H	304	55.9	9.4
4	#7125.00	52.9 AV	68.2	-15.3	1.11 H	304	43.5	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.11 H	304	46.8	8.7
6	7250.00	43.7 AV	54.0	-10.3	1.11 H	304	35.0	8.7
7	#13970.00	50.1 PK	88.2	-38.1	1.71 H	123	34.6	15.5
8	#13970.00	39.6 AV	68.2	-28.6	1.71 H	123	24.1	15.5
9	20955.00	57.0 PK	74.0	-17.0	1.05 H	38	59.7	-2.7
10	20955.00	45.5 AV	54.0	-8.5	1.05 H	38	48.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	98.5 PK			1.22 V	223	90.7	7.8
2	*6985.00	87.3 AV			1.22 V	223	79.5	7.8
3	#7125.00	63.7 PK	88.2	-24.5	1.22 V	223	54.3	9.4
4	#7125.00	51.7 AV	68.2	-16.5	1.22 V	223	42.3	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.22 V	223	46.6	8.7
6	7250.00	43.8 AV	54.0	-10.2	1.22 V	223	35.1	8.7
7	#13970.00	57.6 PK	88.2	-30.6	2.59 V	151	42.1	15.5
8	#13970.00	46.5 AV	68.2	-21.7	2.59 V	151	31.0	15.5
9	20955.00	56.5 PK	74.0	-17.5	1.89 V	29	59.2	-2.7
10	20955.00	45.5 AV	54.0	-8.5	1.89 V	29	48.2	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.0 PK	88.2	-3.2	1.26 H	201	80.7	4.3
2	#5925.00	65.3 AV	68.2	-2.9	1.26 H	201	61.0	4.3
3	*5955.00	123.6 PK			1.26 H	201	119.1	4.5
4	*5955.00	112.7 AV			1.26 H	201	108.2	4.5
5	11910.00	50.2 PK	74.0	-23.8	1.73 H	142	38.0	12.2
6	11910.00	39.7 AV	54.0	-14.3	1.73 H	142	27.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	1.03 H	41	34.4	21.9
8	17865.00	45.0 AV	54.0	-9.0	1.03 H	41	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.5 PK	88.2	-4.7	1.08 V	301	79.2	4.3
2	#5925.00	64.2 AV	68.2	-4.0	1.08 V	301	59.9	4.3
3	*5955.00	122.1 PK			1.08 V	301	117.6	4.5
4	*5955.00	111.9 AV			1.08 V	301	107.4	4.5
5	11910.00	58.0 PK	74.0	-16.0	2.60 V	144	45.8	12.2
6	11910.00	46.6 AV	54.0	-7.4	2.60 V	144	34.4	12.2
7	17865.00	56.8 PK	74.0	-17.2	1.79 V	37	34.9	21.9
8	17865.00	45.4 AV	54.0	-8.6	1.79 V	37	23.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.2 PK			1.26 H	201	118.4	4.8
2	*6195.00	112.2 AV			1.26 H	201	107.4	4.8
3	12390.00	49.6 PK	74.0	-24.4	1.73 H	129	37.3	12.3
4	12390.00	39.4 AV	54.0	-14.6	1.73 H	129	27.1	12.3
5	18585.00	56.0 PK	74.0	-18.0	1.03 H	41	61.0	-5.0
6	18585.00	44.6 AV	54.0	-9.4	1.03 H	41	49.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.0 PK			1.11 V	317	117.2	4.8
2	*6195.00	111.9 AV			1.11 V	317	107.1	4.8
3	12390.00	57.7 PK	74.0	-16.3	2.64 V	148	45.4	12.3
4	12390.00	46.2 AV	54.0	-7.8	2.64 V	148	33.9	12.3
5	18585.00	57.1 PK	74.0	-16.9	1.83 V	41	62.1	-5.0
6	18585.00	46.1 AV	54.0	-7.9	1.83 V	41	51.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.6 PK			1.21 H	199	117.2	6.4
2	*6415.00	112.6 AV			1.21 H	199	106.2	6.4
3	#12830.00	49.5 PK	88.2	-38.7	1.70 H	142	36.5	13.0
4	#12830.00	39.4 AV	68.2	-28.8	1.70 H	142	26.4	13.0
5	19245.00	55.8 PK	74.0	-18.2	1.02 H	27	59.6	-3.8
6	19245.00	44.7 AV	54.0	-9.3	1.02 H	27	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			1.11 V	288	115.8	6.4
2	*6415.00	111.7 AV			1.11 V	288	105.3	6.4
3	#12830.00	58.1 PK	88.2	-30.1	2.54 V	132	45.1	13.0
4	#12830.00	46.3 AV	68.2	-21.9	2.54 V	132	33.3	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.79 V	21	61.1	-3.8
6	19245.00	46.3 AV	54.0	-7.7	1.79 V	21	50.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.2 PK			1.03 H	57	94.8	6.4
2	*6435.00	89.9 AV			1.03 H	57	83.5	6.4
3	#12870.00	50.4 PK	88.2	-37.8	1.75 H	113	37.4	13.0
4	#12870.00	40.3 AV	68.2	-27.9	1.75 H	113	27.3	13.0
5	19305.00	56.6 PK	74.0	-17.4	1.02 H	30	60.3	-3.7
6	19305.00	45.2 AV	54.0	-8.8	1.02 H	30	48.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.1 PK			1.06 V	5	93.7	6.4
2	*6435.00	89.7 AV			1.06 V	5	83.3	6.4
3	#12870.00	58.0 PK	88.2	-30.2	2.60 V	135	45.0	13.0
4	#12870.00	46.7 AV	68.2	-21.5	2.60 V	135	33.7	13.0
5	19305.00	57.2 PK	74.0	-16.8	1.98 V	30	60.9	-3.7
6	19305.00	45.9 AV	54.0	-8.1	1.98 V	30	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	123.9 PK			1.27 H	199	117.3	6.6
2	*6475.00	113.0 AV			1.27 H	199	106.4	6.6
3	#12950.00	49.8 PK	88.2	-38.4	1.74 H	143	36.7	13.1
4	#12950.00	39.8 AV	68.2	-28.4	1.74 H	143	26.7	13.1
5	19425.00	56.0 PK	74.0	-18.0	1.00 H	36	59.8	-3.8
6	19425.00	44.9 AV	54.0	-9.1	1.00 H	36	48.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.7 PK			1.13 V	288	115.1	6.6
2	*6475.00	111.6 AV			1.13 V	288	105.0	6.6
3	#12950.00	57.9 PK	88.2	-30.3	2.57 V	130	44.8	13.1
4	#12950.00	46.2 AV	68.2	-22.0	2.57 V	130	33.1	13.1
5	19425.00	57.0 PK	74.0	-17.0	1.89 V	43	60.8	-3.8
6	19425.00	45.8 AV	54.0	-8.2	1.89 V	43	49.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.0 PK			1.02 H	68	94.1	6.9
2	*6515.00	89.7 AV			1.02 H	68	82.8	6.9
3	#13030.00	50.1 PK	88.2	-38.1	1.73 H	118	36.9	13.2
4	#13030.00	39.8 AV	68.2	-28.4	1.73 H	118	26.6	13.2
5	19545.00	56.8 PK	74.0	-17.2	1.00 H	40	60.9	-4.1
6	19545.00	44.9 AV	54.0	-9.1	1.00 H	40	49.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	98.8 PK			1.09 V	7	91.9	6.9
2	*6515.00	88.9 AV			1.09 V	7	82.0	6.9
3	#13030.00	57.5 PK	88.2	-30.7	2.54 V	143	44.3	13.2
4	#13030.00	46.2 AV	68.2	-22.0	2.54 V	143	33.0	13.2
5	19545.00	57.8 PK	74.0	-16.2	1.98 V	18	61.9	-4.1
6	19545.00	46.5 AV	54.0	-7.5	1.98 V	18	50.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.6 PK			1.25 H	198	116.7	6.9
2	*6535.00	112.6 AV			1.25 H	198	105.7	6.9
3	#13070.00	49.5 PK	88.2	-38.7	1.67 H	114	36.3	13.2
4	#13070.00	39.5 AV	68.2	-28.7	1.67 H	114	26.3	13.2
5	19605.00	56.6 PK	74.0	-17.4	1.00 H	11	60.6	-4.0
6	19605.00	45.2 AV	54.0	-8.8	1.00 H	11	49.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.7 PK			1.05 V	317	114.8	6.9
2	*6535.00	111.7 AV			1.05 V	317	104.8	6.9
3	#13070.00	57.8 PK	88.2	-30.4	2.63 V	159	44.6	13.2
4	#13070.00	46.4 AV	68.2	-21.8	2.63 V	159	33.2	13.2
5	19605.00	56.6 PK	74.0	-17.4	1.87 V	37	60.6	-4.0
6	19605.00	45.5 AV	54.0	-8.5	1.87 V	37	49.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.7 PK			1.23 H	193	115.5	7.2
2	*6695.00	111.9 AV			1.23 H	193	104.7	7.2
3	13390.00	50.2 PK	74.0	-23.8	1.73 H	139	36.2	14.0
4	13390.00	39.7 AV	54.0	-14.3	1.73 H	139	25.7	14.0
5	20085.00	56.1 PK	74.0	-17.9	1.02 H	25	59.6	-3.5
6	20085.00	44.9 AV	54.0	-9.1	1.02 H	25	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			1.02 V	332	113.9	7.2
2	*6695.00	111.4 AV			1.02 V	332	104.2	7.2
3	13390.00	57.2 PK	74.0	-16.8	2.61 V	132	43.2	14.0
4	13390.00	45.9 AV	54.0	-8.1	2.61 V	132	31.9	14.0
5	20085.00	57.1 PK	74.0	-16.9	1.79 V	29	60.6	-3.5
6	20085.00	45.9 AV	54.0	-8.1	1.79 V	29	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.0 PK			1.24 H	179	114.8	7.2
2	*6855.00	111.2 AV			1.24 H	179	104.0	7.2
3	#13710.00	50.7 PK	88.2	-37.5	1.74 H	116	35.5	15.2
4	#13710.00	40.1 AV	68.2	-28.1	1.74 H	116	24.9	15.2
5	20565.00	55.9 PK	74.0	-18.1	1.01 H	23	59.2	-3.3
6	20565.00	44.4 AV	54.0	-9.6	1.01 H	23	47.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.2 PK			1.17 V	287	114.0	7.2
2	*6855.00	111.3 AV			1.17 V	287	104.1	7.2
3	#13710.00	57.9 PK	88.2	-30.3	2.61 V	153	42.7	15.2
4	#13710.00	46.6 AV	68.2	-21.6	2.61 V	153	31.4	15.2
5	20565.00	56.8 PK	74.0	-17.2	1.86 V	18	60.1	-3.3
6	20565.00	45.5 AV	54.0	-8.5	1.86 V	18	48.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.4 PK			1.12 H	73	94.2	7.2
2	*6875.00	90.5 AV			1.12 H	73	83.3	7.2
3	#13750.00	50.2 PK	88.2	-38.0	1.73 H	100	35.1	15.1
4	#13750.00	40.0 AV	68.2	-28.2	1.73 H	100	24.9	15.1
5	20625.00	57.0 PK	74.0	-17.0	1.00 H	22	60.3	-3.3
6	20625.00	45.5 AV	54.0	-8.5	1.00 H	22	48.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.6 PK			1.12 V	5	92.4	7.2
2	*6875.00	89.5 AV			1.12 V	5	82.3	7.2
3	#13750.00	57.4 PK	88.2	-30.8	2.59 V	146	42.3	15.1
4	#13750.00	46.1 AV	68.2	-22.1	2.59 V	146	31.0	15.1
5	20625.00	57.6 PK	74.0	-16.4	1.94 V	27	60.9	-3.3
6	20625.00	46.1 AV	54.0	-7.9	1.94 V	27	49.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.9 PK			1.11 H	61	91.9	8.0
2	*6995.00	88.6 AV			1.11 H	61	80.6	8.0
3	#13990.00	50.1 PK	88.2	-38.1	1.67 H	108	34.5	15.6
4	#13990.00	40.1 AV	68.2	-28.1	1.67 H	108	24.5	15.6
5	20985.00	57.1 PK	74.0	-16.9	1.00 H	43	59.9	-2.8
6	20985.00	45.3 AV	54.0	-8.7	1.00 H	43	48.1	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.7 PK			1.11 V	22	91.7	8.0
2	*6995.00	89.6 AV			1.11 V	22	81.6	8.0
3	#13990.00	57.5 PK	88.2	-30.7	2.53 V	128	41.9	15.6
4	#13990.00	46.0 AV	68.2	-22.2	2.53 V	128	30.4	15.6
5	20985.00	56.7 PK	74.0	-17.3	1.91 V	32	59.5	-2.8
6	20985.00	45.7 AV	54.0	-8.3	1.91 V	32	48.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.2 PK			1.12 H	288	92.7	9.5
2	*7115.00	89.4 AV			1.12 H	288	79.9	9.5
3	#7125.00	85.0 PK	88.2	-3.2	1.12 H	288	75.6	9.4
4	#7125.00	57.6 AV	68.2	-10.6	1.12 H	288	48.2	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.12 H	288	46.9	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.12 H	288	34.7	8.7
7	#14230.00	49.5 PK	88.2	-38.7	1.70 H	110	34.2	15.3
8	#14230.00	39.3 AV	68.2	-28.9	1.70 H	110	24.0	15.3
9	21345.00	57.0 PK	74.0	-17.0	1.06 H	15	58.6	-1.6
10	21345.00	45.3 AV	54.0	-8.7	1.06 H	15	46.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.5 PK			1.11 V	19	90.0	9.5
2	*7115.00	89.3 AV			1.11 V	19	79.8	9.5
3	#7125.00	85.7 PK	88.2	-2.5	1.11 V	19	76.3	9.4
4	#7125.00	56.4 AV	68.2	-11.8	1.11 V	19	47.0	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.11 V	19	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.11 V	19	34.7	8.7
7	#14230.00	58.4 PK	88.2	-29.8	2.49 V	141	43.1	15.3
8	#14230.00	46.8 AV	68.2	-21.4	2.49 V	141	31.5	15.3
9	21345.00	57.6 PK	74.0	-16.4	1.97 V	32	59.2	-1.6
10	21345.00	46.2 AV	54.0	-7.8	1.97 V	32	47.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.21 H	205	78.0	4.3
2	#5925.00	65.0 AV	68.2	-3.2	1.21 H	205	60.7	4.3
3	*5955.00	120.0 PK			1.21 H	205	115.5	4.5
4	*5955.00	111.2 AV			1.21 H	205	106.7	4.5
5	11910.00	50.1 PK	74.0	-23.9	1.78 H	115	37.9	12.2
6	11910.00	39.8 AV	54.0	-14.2	1.78 H	115	27.6	12.2
7	17865.00	56.8 PK	74.0	-17.2	1.00 H	41	34.9	21.9
8	17865.00	45.1 AV	54.0	-8.9	1.00 H	41	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.5 PK	88.2	-4.7	1.10 V	284	79.2	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.10 V	284	62.3	4.3
3	*5955.00	120.0 PK			1.10 V	284	115.5	4.5
4	*5955.00	110.7 AV			1.10 V	284	106.2	4.5
5	11910.00	57.9 PK	74.0	-16.1	2.64 V	129	45.7	12.2
6	11910.00	46.4 AV	54.0	-7.6	2.64 V	129	34.2	12.2
7	17865.00	57.2 PK	74.0	-16.8	1.79 V	47	35.3	21.9
8	17865.00	46.2 AV	54.0	-7.8	1.79 V	47	24.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			1.24 H	190	115.1	4.8
2	*6195.00	110.8 AV			1.24 H	190	106.0	4.8
3	12390.00	49.8 PK	74.0	-24.2	1.68 H	117	37.5	12.3
4	12390.00	39.6 AV	54.0	-14.4	1.68 H	117	27.3	12.3
5	18585.00	56.2 PK	74.0	-17.8	1.00 H	15	61.2	-5.0
6	18585.00	45.1 AV	54.0	-8.9	1.00 H	15	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.6 PK			1.05 V	271	114.8	4.8
2	*6195.00	110.5 AV			1.05 V	271	105.7	4.8
3	12390.00	58.1 PK	74.0	-15.9	2.64 V	154	45.8	12.3
4	12390.00	46.3 AV	54.0	-7.7	2.64 V	154	34.0	12.3
5	18585.00	57.1 PK	74.0	-16.9	1.84 V	35	62.1	-5.0
6	18585.00	46.2 AV	54.0	-7.8	1.84 V	35	51.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.2 PK			1.25 H	190	113.8	6.4
2	*6415.00	111.7 AV			1.25 H	190	105.3	6.4
3	#12830.00	49.5 PK	88.2	-38.7	1.76 H	115	36.5	13.0
4	#12830.00	39.2 AV	68.2	-29.0	1.76 H	115	26.2	13.0
5	19245.00	56.1 PK	74.0	-17.9	1.00 H	15	59.9	-3.8
6	19245.00	44.6 AV	54.0	-9.4	1.00 H	15	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.12 V	272	114.1	6.4
2	*6415.00	111.1 AV			1.12 V	272	104.7	6.4
3	#12830.00	58.1 PK	88.2	-30.1	2.57 V	140	45.1	13.0
4	#12830.00	46.3 AV	68.2	-21.9	2.57 V	140	33.3	13.0
5	19245.00	57.0 PK	74.0	-17.0	1.88 V	43	60.8	-3.8
6	19245.00	45.7 AV	54.0	-8.3	1.88 V	43	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.4 PK			1.19 H	290	96.0	6.4
2	*6435.00	90.9 AV			1.19 H	290	84.5	6.4
3	#12870.00	50.0 PK	88.2	-38.2	1.68 H	112	37.0	13.0
4	#12870.00	39.9 AV	68.2	-28.3	1.68 H	112	26.9	13.0
5	19305.00	56.9 PK	74.0	-17.1	1.04 H	36	60.6	-3.7
6	19305.00	45.0 AV	54.0	-9.0	1.04 H	36	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.9 PK			1.10 V	33	93.5	6.4
2	*6435.00	89.2 AV			1.10 V	33	82.8	6.4
3	#12870.00	57.5 PK	88.2	-30.7	2.58 V	134	44.5	13.0
4	#12870.00	45.9 AV	68.2	-22.3	2.58 V	134	32.9	13.0
5	19305.00	56.8 PK	74.0	-17.2	1.90 V	16	60.5	-3.7
6	19305.00	45.8 AV	54.0	-8.2	1.90 V	16	49.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.6 PK			1.27 H	206	113.0	6.6
2	*6475.00	110.9 AV			1.27 H	206	104.3	6.6
3	#12950.00	50.1 PK	88.2	-38.1	1.69 H	143	37.0	13.1
4	#12950.00	40.0 AV	68.2	-28.2	1.69 H	143	26.9	13.1
5	19425.00	56.7 PK	74.0	-17.3	1.00 H	26	60.5	-3.8
6	19425.00	45.1 AV	54.0	-8.9	1.00 H	26	48.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.2 PK			1.06 V	279	113.6	6.6
2	*6475.00	110.8 AV			1.06 V	279	104.2	6.6
3	#12950.00	58.0 PK	88.2	-30.2	2.63 V	142	44.9	13.1
4	#12950.00	46.7 AV	68.2	-21.5	2.63 V	142	33.6	13.1
5	19425.00	57.5 PK	74.0	-16.5	1.79 V	28	61.3	-3.8
6	19425.00	46.2 AV	54.0	-7.8	1.79 V	28	50.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.0 PK			1.17 H	290	95.1	6.9
2	*6515.00	90.2 AV			1.17 H	290	83.3	6.9
3	#13030.00	50.3 PK	88.2	-37.9	1.75 H	114	37.1	13.2
4	#13030.00	39.9 AV	68.2	-28.3	1.75 H	114	26.7	13.2
5	19545.00	56.8 PK	74.0	-17.2	1.06 H	21	60.9	-4.1
6	19545.00	45.4 AV	54.0	-8.6	1.06 H	21	49.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.3 PK			1.18 V	18	93.4	6.9
2	*6515.00	89.6 AV			1.18 V	18	82.7	6.9
3	#13030.00	57.3 PK	88.2	-30.9	2.53 V	155	44.1	13.2
4	#13030.00	45.9 AV	68.2	-22.3	2.53 V	155	32.7	13.2
5	19545.00	57.3 PK	74.0	-16.7	1.89 V	21	61.4	-4.1
6	19545.00	46.0 AV	54.0	-8.0	1.89 V	21	50.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.9 PK			1.27 H	211	113.0	6.9
2	*6535.00	111.0 AV			1.27 H	211	104.1	6.9
3	#13070.00	50.2 PK	88.2	-38.0	1.76 H	140	37.0	13.2
4	#13070.00	39.6 AV	68.2	-28.6	1.76 H	140	26.4	13.2
5	19605.00	56.3 PK	74.0	-17.7	1.00 H	30	60.3	-4.0
6	19605.00	44.7 AV	54.0	-9.3	1.00 H	30	48.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.9 PK			1.13 V	297	113.0	6.9
2	*6535.00	110.6 AV			1.13 V	297	103.7	6.9
3	#13070.00	57.1 PK	88.2	-31.1	2.56 V	148	43.9	13.2
4	#13070.00	45.9 AV	68.2	-22.3	2.56 V	148	32.7	13.2
5	19605.00	56.8 PK	74.0	-17.2	1.86 V	19	60.8	-4.0
6	19605.00	45.6 AV	54.0	-8.4	1.86 V	19	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.5 PK			1.32 H	193	112.3	7.2
2	*6695.00	110.7 AV			1.32 H	193	103.5	7.2
3	13390.00	50.3 PK	74.0	-23.7	1.77 H	113	36.3	14.0
4	13390.00	39.7 AV	54.0	-14.3	1.77 H	113	25.7	14.0
5	20085.00	55.5 PK	74.0	-18.5	1.00 H	14	59.0	-3.5
6	20085.00	44.4 AV	54.0	-9.6	1.00 H	14	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.5 PK			1.06 V	277	112.3	7.2
2	*6695.00	110.0 AV			1.06 V	277	102.8	7.2
3	13390.00	58.6 PK	74.0	-15.4	2.53 V	158	44.6	14.0
4	13390.00	46.8 AV	54.0	-7.2	2.53 V	158	32.8	14.0
5	20085.00	56.4 PK	74.0	-17.6	1.86 V	39	59.9	-3.5
6	20085.00	45.6 AV	54.0	-8.4	1.86 V	39	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.7 PK			1.30 H	222	111.5	7.2
2	*6855.00	110.0 AV			1.30 H	222	102.8	7.2
3	#13710.00	50.3 PK	88.2	-37.9	1.70 H	141	35.1	15.2
4	#13710.00	39.8 AV	68.2	-28.4	1.70 H	141	24.6	15.2
5	20565.00	56.5 PK	74.0	-17.5	1.00 H	15	59.8	-3.3
6	20565.00	45.1 AV	54.0	-8.9	1.00 H	15	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.9 PK			1.07 V	269	111.7	7.2
2	*6855.00	109.4 AV			1.07 V	269	102.2	7.2
3	#13710.00	57.5 PK	88.2	-30.7	2.55 V	140	42.3	15.2
4	#13710.00	46.1 AV	68.2	-22.1	2.55 V	140	30.9	15.2
5	20565.00	57.0 PK	74.0	-17.0	1.79 V	34	60.3	-3.3
6	20565.00	45.9 AV	54.0	-8.1	1.79 V	34	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.6 PK			1.18 H	280	95.4	7.2
2	*6875.00	90.9 AV			1.18 H	280	83.7	7.2
3	#13750.00	50.4 PK	88.2	-37.8	1.70 H	99	35.3	15.1
4	#13750.00	39.8 AV	68.2	-28.4	1.70 H	99	24.7	15.1
5	20625.00	57.3 PK	74.0	-16.7	1.03 H	34	60.6	-3.3
6	20625.00	45.4 AV	54.0	-8.6	1.03 H	34	48.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.0 PK			1.12 V	33	92.8	7.2
2	*6875.00	89.7 AV			1.12 V	33	82.5	7.2
3	#13750.00	57.5 PK	88.2	-30.7	2.59 V	131	42.4	15.1
4	#13750.00	46.2 AV	68.2	-22.0	2.59 V	131	31.1	15.1
5	20625.00	57.0 PK	74.0	-17.0	1.99 V	39	60.3	-3.3
6	20625.00	46.1 AV	54.0	-7.9	1.99 V	39	49.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.2 PK			1.12 H	293	94.2	8.0
2	*6995.00	90.6 AV			1.12 H	293	82.6	8.0
3	#13990.00	49.6 PK	88.2	-38.6	1.74 H	119	34.0	15.6
4	#13990.00	39.5 AV	68.2	-28.7	1.74 H	119	23.9	15.6
5	20985.00	56.2 PK	74.0	-17.8	1.07 H	14	59.0	-2.8
6	20985.00	44.6 AV	54.0	-9.4	1.07 H	14	47.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.0 PK			1.11 V	23	92.0	8.0
2	*6995.00	89.5 AV			1.11 V	23	81.5	8.0
3	#13990.00	58.3 PK	88.2	-29.9	2.57 V	127	42.7	15.6
4	#13990.00	46.9 AV	68.2	-21.3	2.57 V	127	31.3	15.6
5	20985.00	57.7 PK	74.0	-16.3	1.91 V	16	60.5	-2.8
6	20985.00	46.4 AV	54.0	-7.6	1.91 V	16	49.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.2 PK			1.14 H	287	92.7	9.5
2	*7115.00	90.6 AV			1.14 H	287	81.1	9.5
3	#7125.00	86.6 PK	88.2	-1.6	1.14 H	287	77.2	9.4
4	#7125.00	56.5 AV	68.2	-11.7	1.14 H	287	47.1	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.14 H	287	46.5	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.14 H	287	34.6	8.7
7	#14230.00	49.9 PK	88.2	-38.3	1.74 H	116	34.6	15.3
8	#14230.00	39.6 AV	68.2	-28.6	1.74 H	116	24.3	15.3
9	21345.00	57.2 PK	74.0	-16.8	1.05 H	18	58.8	-1.6
10	21345.00	45.6 AV	54.0	-8.4	1.05 H	18	47.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.8 PK			1.12 V	22	90.3	9.5
2	*7115.00	89.3 AV			1.12 V	22	79.8	9.5
3	#7125.00	84.6 PK	88.2	-3.6	1.12 V	22	75.2	9.4
4	#7125.00	56.3 AV	68.2	-11.9	1.12 V	22	46.9	9.4
5	7250.00	56.2 PK	74.0	-17.8	1.12 V	22	47.5	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.12 V	22	34.8	8.7
7	#14230.00	57.9 PK	88.2	-30.3	2.59 V	142	42.6	15.3
8	#14230.00	46.6 AV	68.2	-21.6	2.59 V	142	31.3	15.3
9	21345.00	57.8 PK	74.0	-16.2	1.95 V	46	59.4	-1.6
10	21345.00	46.4 AV	54.0	-7.6	1.95 V	46	48.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.5 PK	88.2	-13.7	1.28 H	205	70.2	4.3
2	#5925.00	56.9 AV	68.2	-11.3	1.28 H	205	52.6	4.3
3	*5955.00	119.5 PK			1.28 H	205	115.0	4.5
4	*5955.00	108.2 AV			1.28 H	205	103.7	4.5
5	11910.00	50.2 PK	74.0	-23.8	1.77 H	115	38.0	12.2
6	11910.00	39.6 AV	54.0	-14.4	1.77 H	115	27.4	12.2
7	17865.00	56.7 PK	74.0	-17.3	1.00 H	31	34.8	21.9
8	17865.00	45.1 AV	54.0	-8.9	1.00 H	31	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.04 V	284	70.8	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.04 V	284	53.1	4.3
3	*5955.00	118.6 PK			1.04 V	284	114.1	4.5
4	*5955.00	107.7 AV			1.04 V	284	103.2	4.5
5	11910.00	58.1 PK	74.0	-15.9	2.60 V	143	45.9	12.2
6	11910.00	46.7 AV	54.0	-7.3	2.60 V	143	34.5	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.86 V	19	35.2	21.9
8	17865.00	46.1 AV	54.0	-7.9	1.86 V	19	24.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.29 H	220	114.7	4.8
2	*6195.00	108.3 AV			1.29 H	220	103.5	4.8
3	12390.00	50.5 PK	74.0	-23.5	1.72 H	113	38.2	12.3
4	12390.00	39.9 AV	54.0	-14.1	1.72 H	113	27.6	12.3
5	18585.00	55.8 PK	74.0	-18.2	1.02 H	37	60.8	-5.0
6	18585.00	44.6 AV	54.0	-9.4	1.02 H	37	49.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.9 PK			1.09 V	297	114.1	4.8
2	*6195.00	107.9 AV			1.09 V	297	103.1	4.8
3	12390.00	57.6 PK	74.0	-16.4	2.55 V	137	45.3	12.3
4	12390.00	46.0 AV	54.0	-8.0	2.55 V	137	33.7	12.3
5	18585.00	56.4 PK	74.0	-17.6	1.86 V	44	61.4	-5.0
6	18585.00	45.5 AV	54.0	-8.5	1.86 V	44	50.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.2 PK			1.23 H	209	112.8	6.4
2	*6415.00	108.1 AV			1.23 H	209	101.7	6.4
3	#12830.00	50.1 PK	88.2	-38.1	1.75 H	144	37.1	13.0
4	#12830.00	39.7 AV	68.2	-28.5	1.75 H	144	26.7	13.0
5	19245.00	56.0 PK	74.0	-18.0	1.03 H	36	59.8	-3.8
6	19245.00	44.6 AV	54.0	-9.4	1.03 H	36	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.4 PK			1.07 V	276	112.0	6.4
2	*6415.00	107.7 AV			1.07 V	276	101.3	6.4
3	#12830.00	58.5 PK	88.2	-29.7	2.56 V	143	45.5	13.0
4	#12830.00	46.7 AV	68.2	-21.5	2.56 V	143	33.7	13.0
5	19245.00	57.2 PK	74.0	-16.8	1.89 V	17	61.0	-3.8
6	19245.00	46.2 AV	54.0	-7.8	1.89 V	17	50.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.1 PK			1.19 H	280	95.7	6.4
2	*6435.00	91.6 AV			1.19 H	280	85.2	6.4
3	#12870.00	50.0 PK	88.2	-38.2	1.67 H	120	37.0	13.0
4	#12870.00	39.6 AV	68.2	-28.6	1.67 H	120	26.6	13.0
5	19305.00	56.9 PK	74.0	-17.1	1.00 H	29	60.6	-3.7
6	19305.00	45.4 AV	54.0	-8.6	1.00 H	29	49.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.6 PK			1.19 V	6	94.2	6.4
2	*6435.00	89.5 AV			1.19 V	6	83.1	6.4
3	#12870.00	58.0 PK	88.2	-30.2	2.56 V	126	45.0	13.0
4	#12870.00	46.7 AV	68.2	-21.5	2.56 V	126	33.7	13.0
5	19305.00	56.6 PK	74.0	-17.4	1.87 V	32	60.3	-3.7
6	19305.00	45.6 AV	54.0	-8.4	1.87 V	32	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.7 PK			1.29 H	218	113.1	6.6
2	*6475.00	108.2 AV			1.29 H	218	101.6	6.6
3	#12950.00	50.5 PK	88.2	-37.7	1.72 H	134	37.4	13.1
4	#12950.00	40.0 AV	68.2	-28.2	1.72 H	134	26.9	13.1
5	19425.00	55.7 PK	74.0	-18.3	1.00 H	31	59.5	-3.8
6	19425.00	44.5 AV	54.0	-9.5	1.00 H	31	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.5 PK			1.07 V	297	111.9	6.6
2	*6475.00	107.9 AV			1.07 V	297	101.3	6.6
3	#12950.00	57.5 PK	88.2	-30.7	2.63 V	155	44.4	13.1
4	#12950.00	46.0 AV	68.2	-22.2	2.63 V	155	32.9	13.1
5	19425.00	56.8 PK	74.0	-17.2	1.78 V	40	60.6	-3.8
6	19425.00	45.7 AV	54.0	-8.3	1.78 V	40	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.0 PK			1.10 H	292	95.1	6.9
2	*6515.00	91.2 AV			1.10 H	292	84.3	6.9
3	#13030.00	49.8 PK	88.2	-38.4	1.76 H	127	36.6	13.2
4	#13030.00	39.5 AV	68.2	-28.7	1.76 H	127	26.3	13.2
5	19545.00	56.7 PK	74.0	-17.3	1.02 H	44	60.8	-4.1
6	19545.00	45.0 AV	54.0	-9.0	1.02 H	44	49.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.9 PK			1.19 V	20	94.0	6.9
2	*6515.00	89.5 AV			1.19 V	20	82.6	6.9
3	#13030.00	58.2 PK	88.2	-30.0	2.60 V	132	45.0	13.2
4	#13030.00	46.9 AV	68.2	-21.3	2.60 V	132	33.7	13.2
5	19545.00	57.5 PK	74.0	-16.5	1.90 V	30	61.6	-4.1
6	19545.00	46.2 AV	54.0	-7.8	1.90 V	30	50.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.2 PK			1.22 H	217	113.3	6.9
2	*6535.00	108.7 AV			1.22 H	217	101.8	6.9
3	#13070.00	50.1 PK	88.2	-38.1	1.67 H	131	36.9	13.2
4	#13070.00	39.8 AV	68.2	-28.4	1.67 H	131	26.6	13.2
5	19605.00	55.9 PK	74.0	-18.1	1.00 H	11	59.9	-4.0
6	19605.00	44.5 AV	54.0	-9.5	1.00 H	11	48.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.9 PK			1.08 V	277	112.0	6.9
2	*6535.00	108.1 AV			1.08 V	277	101.2	6.9
3	#13070.00	57.7 PK	88.2	-30.5	2.52 V	135	44.5	13.2
4	#13070.00	46.3 AV	68.2	-21.9	2.52 V	135	33.1	13.2
5	19605.00	57.2 PK	74.0	-16.8	1.85 V	29	61.2	-4.0
6	19605.00	46.1 AV	54.0	-7.9	1.85 V	29	50.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.5 PK			1.32 H	198	112.3	7.2
2	*6695.00	108.2 AV			1.32 H	198	101.0	7.2
3	13390.00	49.9 PK	74.0	-24.1	1.76 H	119	35.9	14.0
4	13390.00	39.8 AV	54.0	-14.2	1.76 H	119	25.8	14.0
5	20085.00	56.0 PK	74.0	-18.0	1.00 H	34	59.5	-3.5
6	20085.00	44.7 AV	54.0	-9.3	1.00 H	34	48.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.5 PK			1.09 V	287	111.3	7.2
2	*6695.00	107.3 AV			1.09 V	287	100.1	7.2
3	13390.00	57.7 PK	74.0	-16.3	2.61 V	160	43.7	14.0
4	13390.00	46.2 AV	54.0	-7.8	2.61 V	160	32.2	14.0
5	20085.00	56.8 PK	74.0	-17.2	1.81 V	40	60.3	-3.5
6	20085.00	45.6 AV	54.0	-8.4	1.81 V	40	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.31 H	209	111.6	7.2
2	*6855.00	107.6 AV			1.31 H	209	100.4	7.2
3	#13710.00	50.3 PK	88.2	-37.9	1.70 H	117	35.1	15.2
4	#13710.00	39.8 AV	68.2	-28.4	1.70 H	117	24.6	15.2
5	20565.00	56.1 PK	74.0	-17.9	1.00 H	37	59.4	-3.3
6	20565.00	44.7 AV	54.0	-9.3	1.00 H	37	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.07 V	272	110.6	7.2
2	*6855.00	106.7 AV			1.07 V	272	99.5	7.2
3	#13710.00	57.3 PK	88.2	-30.9	2.59 V	130	42.1	15.2
4	#13710.00	46.0 AV	68.2	-22.2	2.59 V	130	30.8	15.2
5	20565.00	56.4 PK	74.0	-17.6	1.82 V	44	59.7	-3.3
6	20565.00	45.5 AV	54.0	-8.5	1.82 V	44	48.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.9 PK			1.07 H	285	94.7	7.2
2	*6875.00	91.2 AV			1.07 H	285	84.0	7.2
3	#13750.00	49.8 PK	88.2	-38.4	1.71 H	111	34.7	15.1
4	#13750.00	39.5 AV	68.2	-28.7	1.71 H	111	24.4	15.1
5	20625.00	56.6 PK	74.0	-17.4	1.00 H	22	59.9	-3.3
6	20625.00	45.1 AV	54.0	-8.9	1.00 H	22	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.6 PK			1.14 V	34	92.4	7.2
2	*6875.00	88.7 AV			1.14 V	34	81.5	7.2
3	#13750.00	57.2 PK	88.2	-31.0	2.50 V	142	42.1	15.1
4	#13750.00	45.9 AV	68.2	-22.3	2.50 V	142	30.8	15.1
5	20625.00	57.3 PK	74.0	-16.7	1.98 V	31	60.6	-3.3
6	20625.00	45.8 AV	54.0	-8.2	1.98 V	31	49.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.6 PK			1.19 H	287	94.6	8.0
2	*6995.00	91.9 AV			1.19 H	287	83.9	8.0
3	#13990.00	49.9 PK	88.2	-38.3	1.71 H	116	34.3	15.6
4	#13990.00	39.6 AV	68.2	-28.6	1.71 H	116	24.0	15.6
5	20985.00	56.2 PK	74.0	-17.8	1.06 H	26	59.0	-2.8
6	20985.00	44.9 AV	54.0	-9.1	1.06 H	26	47.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.9 PK			1.22 V	14	91.9	8.0
2	*6995.00	88.9 AV			1.22 V	14	80.9	8.0
3	#13990.00	57.6 PK	88.2	-30.6	2.56 V	138	42.0	15.6
4	#13990.00	46.4 AV	68.2	-21.8	2.56 V	138	30.8	15.6
5	20985.00	57.3 PK	74.0	-16.7	1.96 V	24	60.1	-2.8
6	20985.00	46.4 AV	54.0	-7.6	1.96 V	24	49.2	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			1.13 H	287	92.5	9.5
2	*7115.00	91.4 AV			1.13 H	287	81.9	9.5
3	#7125.00	86.2 PK	88.2	-2.0	1.13 H	287	76.8	9.4
4	#7125.00	57.3 AV	68.2	-10.9	1.13 H	287	47.9	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.13 H	287	46.5	8.7
6	7250.00	43.7 AV	54.0	-10.3	1.13 H	287	35.0	8.7
7	#14230.00	50.2 PK	88.2	-38.0	1.69 H	119	34.9	15.3
8	#14230.00	39.6 AV	68.2	-28.6	1.69 H	119	24.3	15.3
9	21345.00	56.8 PK	74.0	-17.2	1.06 H	18	58.4	-1.6
10	21345.00	45.3 AV	54.0	-8.7	1.06 H	18	46.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.3 PK			1.16 V	21	90.8	9.5
2	*7115.00	89.1 AV			1.16 V	21	79.6	9.5
3	#7125.00	85.3 PK	88.2	-2.9	1.16 V	21	75.9	9.4
4	#7125.00	56.2 AV	68.2	-12.0	1.16 V	21	46.8	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.16 V	21	46.7	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.16 V	21	34.7	8.7
7	#14230.00	58.2 PK	88.2	-30.0	2.50 V	148	42.9	15.3
8	#14230.00	46.6 AV	68.2	-21.6	2.50 V	148	31.3	15.3
9	21345.00	57.6 PK	74.0	-16.4	1.92 V	39	59.2	-1.6
10	21345.00	46.2 AV	54.0	-7.8	1.92 V	39	47.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.3 PK	88.2	-3.9	1.20 H	8	80.0	4.3
2	#5925.00	55.6 AV	68.2	-12.6	1.20 H	8	51.3	4.3
3	*5955.00	119.2 PK			1.20 H	8	114.7	4.5
4	*5955.00	109.6 AV			1.20 H	8	105.1	4.5
5	11910.00	49.5 PK	74.0	-24.5	1.71 H	116	37.3	12.2
6	11910.00	39.5 AV	54.0	-14.5	1.71 H	116	27.3	12.2
7	17865.00	56.0 PK	74.0	-18.0	1.00 H	15	34.1	21.9
8	17865.00	44.8 AV	54.0	-9.2	1.00 H	15	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.13 V	286	78.0	4.3
2	#5925.00	55.3 AV	68.2	-12.9	1.13 V	286	51.0	4.3
3	*5955.00	118.7 PK			1.13 V	286	114.2	4.5
4	*5955.00	109.5 AV			1.13 V	286	105.0	4.5
5	11910.00	58.0 PK	74.0	-16.0	2.61 V	143	45.8	12.2
6	11910.00	46.7 AV	54.0	-7.3	2.61 V	143	34.5	12.2
7	17865.00	56.5 PK	74.0	-17.5	1.88 V	20	34.6	21.9
8	17865.00	45.7 AV	54.0	-8.3	1.88 V	20	23.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.5 PK			1.12 H	298	96.9	6.6
2	*6475.00	90.6 AV			1.12 H	298	84.0	6.6
3	#12950.00	50.1 PK	88.2	-38.1	1.71 H	106	37.0	13.1
4	#12950.00	39.6 AV	68.2	-28.6	1.71 H	106	26.5	13.1
5	19425.00	55.8 PK	74.0	-18.2	1.00 H	24	59.6	-3.8
6	19425.00	44.5 AV	54.0	-9.5	1.00 H	24	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	99.0 PK			1.00 V	11	92.4	6.6
2	*6475.00	89.0 AV			1.00 V	11	82.4	6.6
3	#12950.00	58.0 PK	88.2	-30.2	2.64 V	120	44.9	13.1
4	#12950.00	46.2 AV	68.2	-22.0	2.64 V	120	33.1	13.1
5	19425.00	57.1 PK	74.0	-16.9	1.98 V	12	60.9	-3.8
6	19425.00	46.0 AV	54.0	-8.0	1.98 V	12	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	104.0 PK			1.17 H	294	96.8	7.2
2	*6695.00	91.0 AV			1.17 H	294	83.8	7.2
3	13390.00	50.5 PK	74.0	-23.5	1.76 H	106	36.5	14.0
4	13390.00	39.9 AV	54.0	-14.1	1.76 H	106	25.9	14.0
5	20085.00	56.3 PK	74.0	-17.7	1.00 H	25	59.8	-3.5
6	20085.00	44.9 AV	54.0	-9.1	1.00 H	25	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	98.5 PK			1.00 V	16	91.3	7.2
2	*6695.00	88.6 AV			1.00 V	16	81.4	7.2
3	13390.00	58.0 PK	74.0	-16.0	2.60 V	130	44.0	14.0
4	13390.00	46.4 AV	54.0	-7.6	2.60 V	130	32.4	14.0
5	20085.00	56.5 PK	74.0	-17.5	2.04 V	27	60.0	-3.5
6	20085.00	45.7 AV	54.0	-8.3	2.04 V	27	49.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.6 PK			1.13 H	289	94.1	9.5
2	*7115.00	90.4 AV			1.13 H	289	80.9	9.5
3	#7125.00	62.2 PK	88.2	-26.0	1.13 H	289	52.8	9.4
4	#7125.00	44.7 AV	68.2	-23.5	1.13 H	289	35.3	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.13 H	289	46.0	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.13 H	289	34.8	8.7
7	#14230.00	50.2 PK	88.2	-38.0	1.71 H	110	34.9	15.3
8	#14230.00	39.7 AV	68.2	-28.5	1.71 H	110	24.4	15.3
9	21345.00	56.2 PK	74.0	-17.8	1.00 H	19	57.8	-1.6
10	21345.00	44.8 AV	54.0	-9.2	1.00 H	19	46.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.2 PK			1.03 V	18	89.7	9.5
2	*7115.00	89.1 AV			1.03 V	18	79.6	9.5
3	#7125.00	61.3 PK	88.2	-26.9	1.03 V	18	51.9	9.4
4	#7125.00	44.0 AV	68.2	-24.2	1.03 V	18	34.6	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.03 V	18	46.4	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.03 V	18	34.6	8.7
7	#14230.00	58.3 PK	88.2	-29.9	2.58 V	130	43.0	15.3
8	#14230.00	46.6 AV	68.2	-21.6	2.58 V	130	31.3	15.3
9	21345.00	56.7 PK	74.0	-17.3	1.96 V	26	58.3	-1.6
10	21345.00	45.6 AV	54.0	-8.4	1.96 V	26	47.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.3 PK	88.2	-14.9	1.14 H	7	69.0	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.14 H	7	53.1	4.3
3	*5955.00	117.8 PK			1.14 H	7	113.3	4.5
4	*5955.00	106.9 AV			1.14 H	7	102.4	4.5
5	11910.00	49.5 PK	74.0	-24.5	1.74 H	122	37.3	12.2
6	11910.00	39.3 AV	54.0	-14.7	1.74 H	122	27.1	12.2
7	17865.00	56.2 PK	74.0	-17.8	1.03 H	10	34.3	21.9
8	17865.00	44.6 AV	54.0	-9.4	1.03 H	10	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.16 V	284	69.4	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.16 V	284	53.1	4.3
3	*5955.00	116.5 PK			1.16 V	284	112.0	4.5
4	*5955.00	106.3 AV			1.16 V	284	101.8	4.5
5	11910.00	58.4 PK	74.0	-15.6	2.56 V	138	46.2	12.2
6	11910.00	46.6 AV	54.0	-7.4	2.56 V	138	34.4	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.86 V	19	35.2	21.9
8	17865.00	46.2 AV	54.0	-7.8	1.86 V	19	24.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.0 PK			1.10 H	291	96.4	6.6
2	*6475.00	90.7 AV			1.10 H	291	84.1	6.6
3	#12950.00	50.3 PK	88.2	-37.9	1.62 H	113	37.2	13.1
4	#12950.00	39.6 AV	68.2	-28.6	1.62 H	113	26.5	13.1
5	19425.00	57.0 PK	74.0	-17.0	1.06 H	49	60.8	-3.8
6	19425.00	45.5 AV	54.0	-8.5	1.06 H	49	49.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.0 PK			1.13 V	21	94.4	6.6
2	*6475.00	89.2 AV			1.13 V	21	82.6	6.6
3	#12950.00	57.1 PK	88.2	-31.1	2.52 V	135	44.0	13.1
4	#12950.00	45.8 AV	68.2	-22.4	2.52 V	135	32.7	13.1
5	19425.00	57.6 PK	74.0	-16.4	1.87 V	16	61.4	-3.8
6	19425.00	46.5 AV	54.0	-7.5	1.87 V	16	50.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.6 PK			1.13 H	305	95.4	7.2
2	*6695.00	90.4 AV			1.13 H	305	83.2	7.2
3	13390.00	50.0 PK	74.0	-24.0	1.62 H	100	36.0	14.0
4	13390.00	39.3 AV	54.0	-14.7	1.62 H	100	25.3	14.0
5	20085.00	56.8 PK	74.0	-17.2	1.10 H	43	60.3	-3.5
6	20085.00	45.4 AV	54.0	-8.6	1.10 H	43	48.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	101.4 PK			1.13 V	6	94.2	7.2
2	*6695.00	89.4 AV			1.13 V	6	82.2	7.2
3	13390.00	57.3 PK	74.0	-16.7	2.48 V	134	43.3	14.0
4	13390.00	45.7 AV	54.0	-8.3	2.48 V	134	31.7	14.0
5	20085.00	58.1 PK	74.0	-15.9	1.82 V	11	61.6	-3.5
6	20085.00	46.9 AV	54.0	-7.1	1.82 V	11	50.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.5 PK			1.14 H	288	93.0	9.5
2	*7115.00	90.3 AV			1.14 H	288	80.8	9.5
3	#7125.00	86.2 PK	88.2	-2.0	1.14 H	288	76.8	9.4
4	#7125.00	56.4 AV	68.2	-11.8	1.14 H	288	47.0	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.14 H	288	46.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.14 H	288	34.7	8.7
7	#14230.00	50.0 PK	88.2	-38.2	1.67 H	99	34.7	15.3
8	#14230.00	39.5 AV	68.2	-28.7	1.67 H	99	24.2	15.3
9	21345.00	56.8 PK	74.0	-17.2	1.05 H	39	58.4	-1.6
10	21345.00	45.2 AV	54.0	-8.8	1.05 H	39	46.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.7 PK			1.11 V	21	91.2	9.5
2	*7115.00	88.7 AV			1.11 V	21	79.2	9.5
3	#7125.00	86.3 PK	88.2	-1.9	1.11 V	21	76.9	9.4
4	#7125.00	55.8 AV	68.2	-12.4	1.11 V	21	46.4	9.4
5	7250.00	55.7 PK	74.0	-18.3	1.11 V	21	47.0	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.11 V	21	34.8	8.7
7	#14230.00	57.8 PK	88.2	-30.4	2.49 V	130	42.5	15.3
8	#14230.00	46.3 AV	68.2	-21.9	2.49 V	130	31.0	15.3
9	21345.00	57.3 PK	74.0	-16.7	1.89 V	25	58.9	-1.6
10	21345.00	46.3 AV	54.0	-7.7	1.89 V	25	47.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.0 PK	88.2	-11.2	1.00 H	0	72.7	4.3
2	#5925.00	64.6 AV	68.2	-3.6	1.00 H	0	60.3	4.3
3	*5985.00	108.9 PK			1.13 H	64	104.5	4.4
4	*5985.00	97.7 AV			1.13 H	64	93.3	4.4
5	11970.00	49.6 PK	74.0	-24.4	1.75 H	142	37.4	12.2
6	11970.00	39.5 AV	54.0	-14.5	1.75 H	142	27.3	12.2
7	17955.00	56.6 PK	74.0	-17.4	1.00 H	12	33.2	23.4
8	17955.00	45.3 AV	54.0	-8.7	1.00 H	12	21.9	23.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.1 PK	88.2	-12.1	1.28 V	289	71.8	4.3
2	#5925.00	62.9 AV	68.2	-5.3	1.28 V	289	58.6	4.3
3	*5985.00	107.7 PK			1.28 V	289	103.3	4.4
4	*5985.00	96.5 AV			1.28 V	289	92.1	4.4
5	11970.00	57.9 PK	74.0	-16.1	2.57 V	156	45.7	12.2
6	11970.00	46.5 AV	54.0	-7.5	2.57 V	156	34.3	12.2
7	17955.00	56.9 PK	74.0	-17.1	1.84 V	42	33.5	23.4
8	17955.00	46.0 AV	54.0	-8.0	1.84 V	42	22.6	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	100.9 PK			1.08 H	305	94.4	6.5
2	*6465.00	90.0 AV			1.08 H	305	83.5	6.5
3	#12930.00	49.9 PK	88.2	-38.3	1.70 H	116	36.8	13.1
4	#12930.00	39.7 AV	68.2	-28.5	1.70 H	116	26.6	13.1
5	19395.00	56.9 PK	74.0	-17.1	1.02 H	20	60.6	-3.7
6	19395.00	45.2 AV	54.0	-8.8	1.02 H	20	48.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	101.1 PK			1.14 V	67	94.6	6.5
2	*6465.00	89.9 AV			1.14 V	67	83.4	6.5
3	#12930.00	57.5 PK	88.2	-30.7	2.47 V	162	44.4	13.1
4	#12930.00	46.6 AV	68.2	-21.6	2.47 V	162	33.5	13.1
5	19395.00	56.8 PK	74.0	-17.2	1.89 V	32	60.5	-3.7
6	19395.00	46.0 AV	54.0	-8.0	1.89 V	32	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	101.1 PK			1.04 H	311	93.9	7.2
2	*6705.00	90.2 AV			1.04 H	311	83.0	7.2
3	#13410.00	50.1 PK	88.2	-38.1	1.64 H	101	35.9	14.2
4	#13410.00	39.9 AV	68.2	-28.3	1.64 H	101	25.7	14.2
5	20115.00	56.9 PK	74.0	-17.1	1.00 H	26	60.4	-3.5
6	20115.00	45.5 AV	54.0	-8.5	1.00 H	26	49.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	100.8 PK			1.16 V	72	93.6	7.2
2	*6705.00	89.5 AV			1.16 V	72	82.3	7.2
3	#13410.00	57.1 PK	88.2	-31.1	2.52 V	166	42.9	14.2
4	#13410.00	46.5 AV	68.2	-21.7	2.52 V	166	32.3	14.2
5	20115.00	56.8 PK	74.0	-17.2	1.89 V	41	60.3	-3.5
6	20115.00	46.1 AV	54.0	-7.9	1.89 V	41	49.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.4 PK			1.14 H	298	93.0	8.4
2	*7025.00	90.3 AV			1.14 H	298	81.9	8.4
3	#7125.00	57.8 PK	88.2	-30.4	1.14 H	298	48.4	9.4
4	#7125.00	46.3 AV	68.2	-21.9	1.14 H	298	36.9	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.14 H	298	46.7	8.7
6	7250.00	43.2 AV	54.0	-10.8	1.14 H	298	34.5	8.7
7	#14050.00	50.0 PK	88.2	-38.2	1.74 H	118	34.5	15.5
8	#14050.00	39.6 AV	68.2	-28.6	1.74 H	118	24.1	15.5
9	21075.00	56.9 PK	74.0	-17.1	1.07 H	20	59.1	-2.2
10	21075.00	45.0 AV	54.0	-9.0	1.07 H	20	47.2	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	100.9 PK			1.11 V	68	92.5	8.4
2	*7025.00	89.5 AV			1.11 V	68	81.1	8.4
3	#7125.00	56.8 PK	88.2	-31.4	1.11 V	68	47.4	9.4
4	#7125.00	45.1 AV	68.2	-23.1	1.11 V	68	35.7	9.4
5	7250.00	55.8 PK	74.0	-18.2	1.11 V	68	47.1	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.11 V	68	34.7	8.7
7	#14050.00	58.0 PK	88.2	-30.2	2.50 V	155	42.5	15.5
8	#14050.00	46.8 AV	68.2	-21.4	2.50 V	155	31.3	15.5
9	21075.00	57.2 PK	74.0	-16.8	1.89 V	29	59.4	-2.2
10	21075.00	46.3 AV	54.0	-7.7	1.89 V	29	48.5	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.0 PK	88.2	-7.2	1.00 H	0	76.7	4.3
2	#5925.00	65.4 AV	68.2	-2.8	1.00 H	0	61.1	4.3
3	*6025.00	107.5 PK			1.12 H	64	103.3	4.2
4	*6025.00	96.0 AV			1.12 H	64	91.8	4.2
5	12050.00	50.5 PK	74.0	-23.5	1.68 H	128	38.1	12.4
6	12050.00	40.1 AV	54.0	-13.9	1.68 H	128	27.7	12.4
7	18075.00	56.4 PK	74.0	-17.6	1.00 H	13	61.1	-4.7
8	18075.00	45.3 AV	54.0	-8.7	1.00 H	13	50.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.6 PK	88.2	-9.6	1.00 V	0	74.3	4.3
2	#5925.00	63.7 AV	68.2	-4.5	1.00 V	0	59.4	4.3
3	*6025.00	105.1 PK			1.06 V	287	100.9	4.2
4	*6025.00	94.0 AV			1.06 V	287	89.8	4.2
5	12050.00	58.2 PK	74.0	-15.8	2.54 V	153	45.8	12.4
6	12050.00	46.4 AV	54.0	-7.6	2.54 V	153	34.0	12.4
7	18075.00	57.0 PK	74.0	-17.0	1.82 V	20	61.7	-4.7
8	18075.00	46.1 AV	54.0	-7.9	1.82 V	20	50.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.8 PK			1.14 H	289	94.0	6.8
2	*6505.00	89.2 AV			1.14 H	289	82.4	6.8
3	#13010.00	50.7 PK	88.2	-37.5	1.77 H	103	37.5	13.2
4	#13010.00	39.9 AV	68.2	-28.3	1.77 H	103	26.7	13.2
5	19515.00	57.3 PK	74.0	-16.7	1.00 H	0	61.4	-4.1
6	19515.00	45.6 AV	54.0	-8.4	1.00 H	0	49.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.3 PK			1.20 V	54	93.5	6.8
2	*6505.00	87.9 AV			1.20 V	54	81.1	6.8
3	#13010.00	57.3 PK	88.2	-30.9	2.49 V	157	44.1	13.2
4	#13010.00	46.3 AV	68.2	-21.9	2.49 V	157	33.1	13.2
5	19515.00	57.0 PK	74.0	-17.0	1.98 V	23	61.1	-4.1
6	19515.00	45.8 AV	54.0	-8.2	1.98 V	23	49.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.9 PK			1.12 H	279	93.7	7.2
2	*6665.00	89.2 AV			1.12 H	279	82.0	7.2
3	13330.00	50.3 PK	74.0	-23.7	1.80 H	115	36.5	13.8
4	13330.00	39.8 AV	54.0	-14.2	1.80 H	115	26.0	13.8
5	19995.00	57.5 PK	74.0	-16.5	1.04 H	13	61.1	-3.6
6	19995.00	45.7 AV	54.0	-8.3	1.04 H	13	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.1 PK			1.16 V	62	92.9	7.2
2	*6665.00	87.8 AV			1.16 V	62	80.6	7.2
3	13330.00	57.3 PK	74.0	-16.7	2.47 V	154	43.5	13.8
4	13330.00	46.3 AV	54.0	-7.7	2.47 V	154	32.5	13.8
5	19995.00	56.8 PK	74.0	-17.2	1.96 V	19	60.4	-3.6
6	19995.00	45.4 AV	54.0	-8.6	1.96 V	19	49.0	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	100.6 PK			1.10 H	298	92.8	7.8
2	*6985.00	89.2 AV			1.10 H	298	81.4	7.8
3	#7125.00	70.1 PK	88.2	-18.1	1.10 H	298	60.7	9.4
4	#7125.00	51.4 AV	68.2	-16.8	1.10 H	298	42.0	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.10 H	298	46.2	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.10 H	298	34.9	8.7
7	#13970.00	50.9 PK	88.2	-37.3	1.78 H	119	35.4	15.5
8	#13970.00	40.3 AV	68.2	-27.9	1.78 H	119	24.8	15.5
9	20955.00	57.3 PK	74.0	-16.7	1.00 H	16	60.0	-2.7
10	20955.00	45.5 AV	54.0	-8.5	1.00 H	16	48.2	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	100.6 PK			1.15 V	57	92.8	7.8
2	*6985.00	88.3 AV			1.15 V	57	80.5	7.8
3	#7125.00	66.6 PK	88.2	-21.6	1.15 V	57	57.2	9.4
4	#7125.00	50.3 AV	68.2	-17.9	1.15 V	57	40.9	9.4
5	7250.00	55.7 PK	74.0	-18.3	1.15 V	57	47.0	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.15 V	57	34.8	8.7
7	#13970.00	57.6 PK	88.2	-30.6	2.50 V	155	42.1	15.5
8	#13970.00	46.3 AV	68.2	-21.9	2.50 V	155	30.8	15.5
9	20955.00	57.0 PK	74.0	-17.0	1.95 V	34	59.7	-2.7
10	20955.00	45.9 AV	54.0	-8.1	1.95 V	34	48.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.00 H	0	72.2	4.3
2	#5925.00	62.7 AV	68.2	-5.5	1.00 H	0	58.4	4.3
3	*6025.00	106.3 PK			1.12 H	64	102.1	4.2
4	*6025.00	94.7 AV			1.12 H	64	90.5	4.2
5	12050.00	50.1 PK	74.0	-23.9	1.76 H	129	37.7	12.4
6	12050.00	39.9 AV	54.0	-14.1	1.76 H	129	27.5	12.4
7	18075.00	56.0 PK	74.0	-18.0	1.01 H	27	60.7	-4.7
8	18075.00	44.5 AV	54.0	-9.5	1.01 H	27	49.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.6 PK	88.2	-12.6	1.00 V	0	71.3	4.3
2	#5925.00	61.5 AV	68.2	-6.7	1.00 V	0	57.2	4.3
3	*6025.00	104.5 PK			1.06 V	287	100.3	4.2
4	*6025.00	92.8 AV			1.06 V	287	88.6	4.2
5	12050.00	57.9 PK	74.0	-16.1	2.61 V	130	45.5	12.4
6	12050.00	46.1 AV	54.0	-7.9	2.61 V	130	33.7	12.4
7	18075.00	57.4 PK	74.0	-16.6	1.82 V	34	62.1	-4.7
8	18075.00	46.3 AV	54.0	-7.7	1.82 V	34	51.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.7 PK			1.18 H	282	93.9	6.8
2	*6505.00	88.6 AV			1.18 H	282	81.8	6.8
3	#13010.00	50.5 PK	88.2	-37.7	1.74 H	117	37.3	13.2
4	#13010.00	40.2 AV	68.2	-28.0	1.74 H	117	27.0	13.2
5	19515.00	57.0 PK	74.0	-17.0	1.00 H	0	61.1	-4.1
6	19515.00	45.5 AV	54.0	-8.5	1.00 H	0	49.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	100.3 PK			1.31 V	66	93.5	6.8
2	*6505.00	87.8 AV			1.31 V	66	81.0	6.8
3	#13010.00	58.0 PK	88.2	-30.2	2.59 V	136	44.8	13.2
4	#13010.00	46.6 AV	68.2	-21.6	2.59 V	136	33.4	13.2
5	19515.00	56.8 PK	74.0	-17.2	1.90 V	38	60.9	-4.1
6	19515.00	45.5 AV	54.0	-8.5	1.90 V	38	49.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.3 PK			1.17 H	269	93.1	7.2
2	*6665.00	88.3 AV			1.17 H	269	81.1	7.2
3	13330.00	51.1 PK	74.0	-22.9	1.71 H	130	37.3	13.8
4	13330.00	40.7 AV	54.0	-13.3	1.71 H	130	26.9	13.8
5	19995.00	56.8 PK	74.0	-17.2	1.00 H	0	60.4	-3.6
6	19995.00	45.5 AV	54.0	-8.5	1.00 H	0	49.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.0 PK			1.37 V	69	92.8	7.2
2	*6665.00	87.5 AV			1.37 V	69	80.3	7.2
3	13330.00	57.7 PK	74.0	-16.3	2.53 V	127	43.9	13.8
4	13330.00	46.6 AV	54.0	-7.4	2.53 V	127	32.8	13.8
5	19995.00	56.6 PK	74.0	-17.4	1.89 V	33	60.2	-3.6
6	19995.00	45.3 AV	54.0	-8.7	1.89 V	33	48.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	100.5 PK			1.13 H	296	92.7	7.8
2	*6985.00	88.6 AV			1.13 H	296	80.8	7.8
3	#7125.00	69.3 PK	88.2	-18.9	1.13 H	296	59.9	9.4
4	#7125.00	54.5 AV	68.2	-13.7	1.13 H	296	45.1	9.4
5	7250.00	56.0 PK	74.0	-18.0	1.13 H	296	47.3	8.7
6	7250.00	43.8 AV	54.0	-10.2	1.13 H	296	35.1	8.7
7	#13970.00	50.0 PK	88.2	-38.2	1.71 H	125	34.5	15.5
8	#13970.00	39.8 AV	68.2	-28.4	1.71 H	125	24.3	15.5
9	20955.00	57.1 PK	74.0	-16.9	1.00 H	15	59.8	-2.7
10	20955.00	45.4 AV	54.0	-8.6	1.00 H	15	48.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	100.2 PK			1.29 V	56	92.4	7.8
2	*6985.00	87.7 AV			1.29 V	56	79.9	7.8
3	#7125.00	64.3 PK	88.2	-23.9	1.29 V	56	54.9	9.4
4	#7125.00	52.2 AV	68.2	-16.0	1.29 V	56	42.8	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.29 V	56	46.0	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.29 V	56	34.7	8.7
7	#13970.00	57.7 PK	88.2	-30.5	2.55 V	127	42.2	15.5
8	#13970.00	46.5 AV	68.2	-21.7	2.55 V	127	31.0	15.5
9	20955.00	57.3 PK	74.0	-16.7	1.92 V	41	60.0	-2.7
10	20955.00	46.0 AV	54.0	-8.0	1.92 V	41	48.7	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode B

2Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

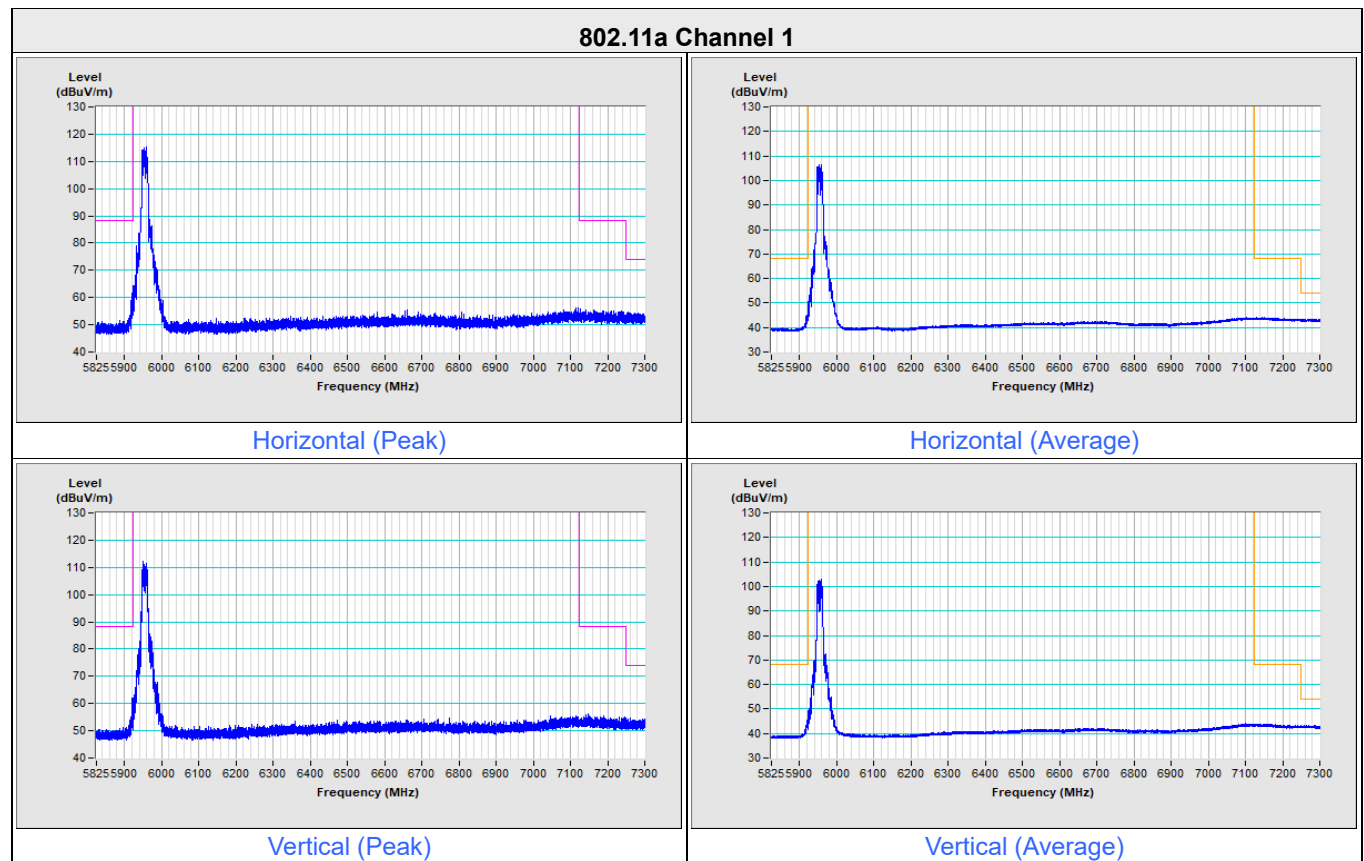


802.11a Channel 233

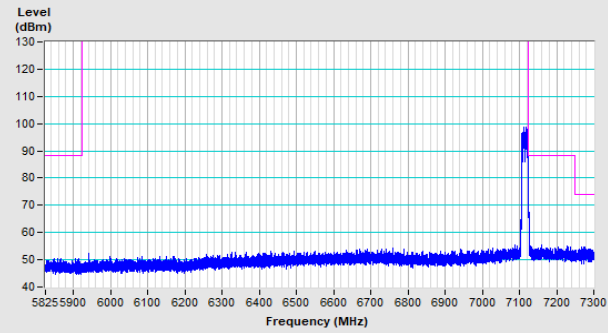


Horizontal (Peak)

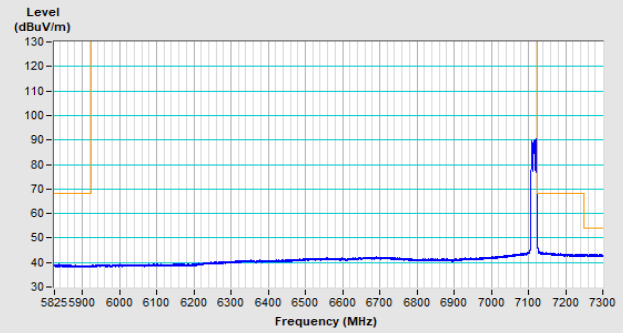

Horizontal (Average)

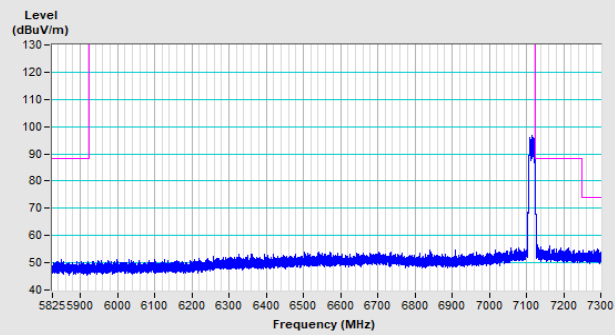


Vertical (Peak)

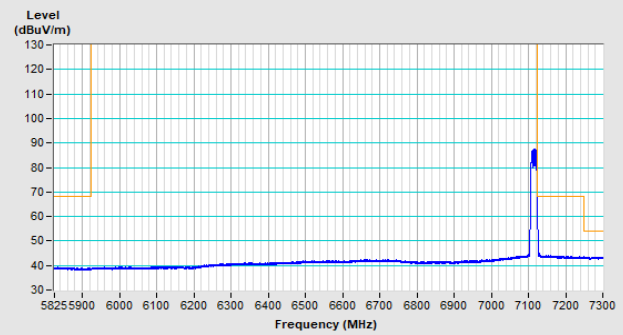


Vertical (Average)

2Tx NSS2


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

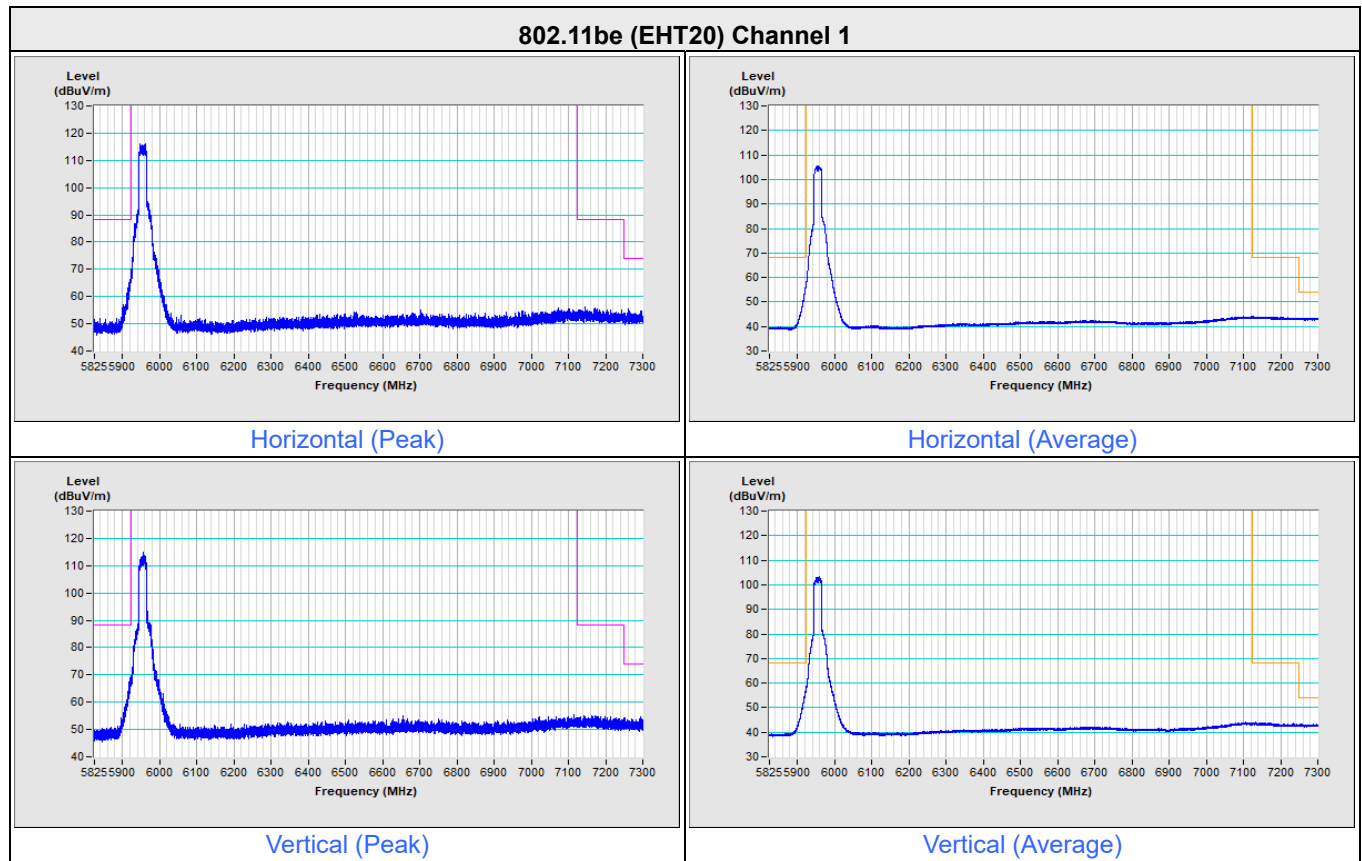

802.11be (EHT20) Channel 233

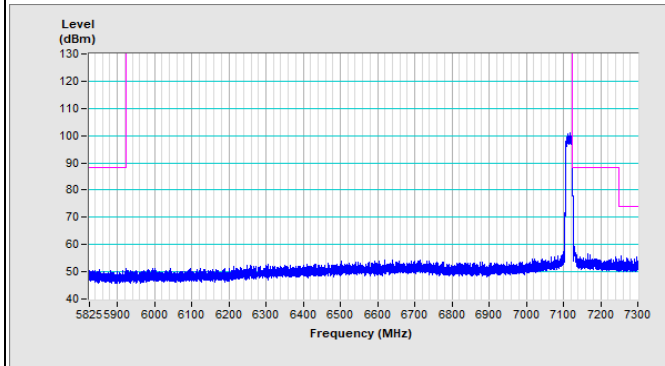


Horizontal (Peak)

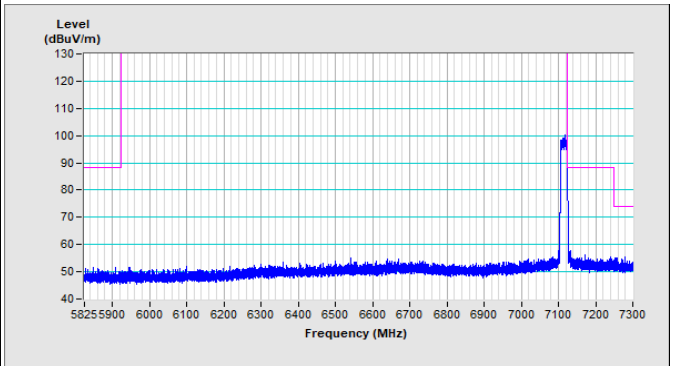


Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233

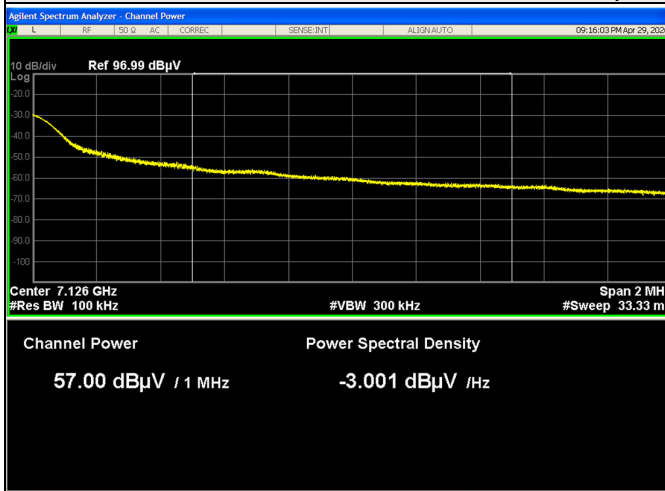


Horizontal (Average)

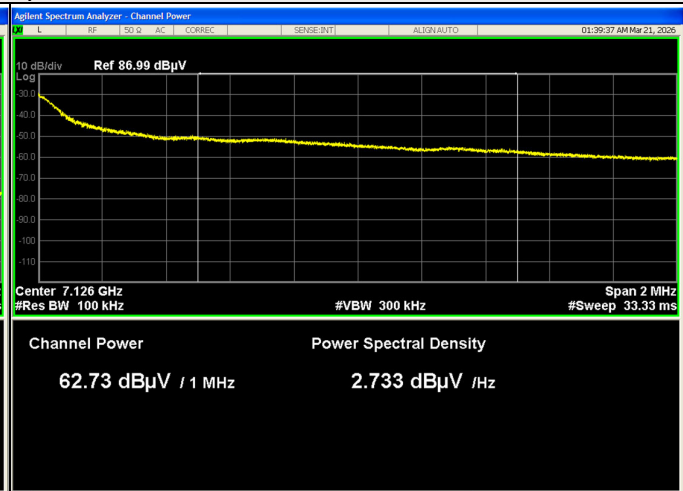


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

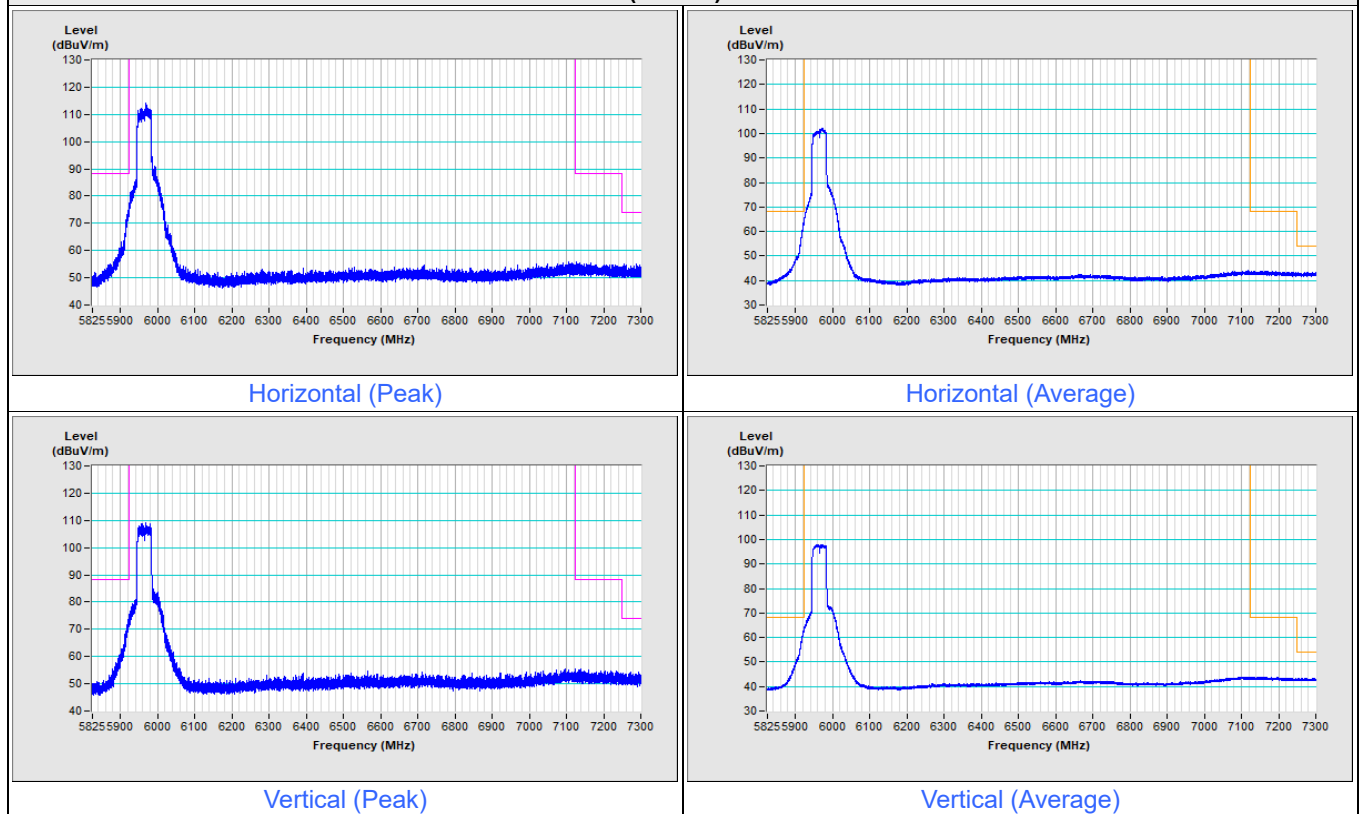


802.11be (EHT40) Channel 227

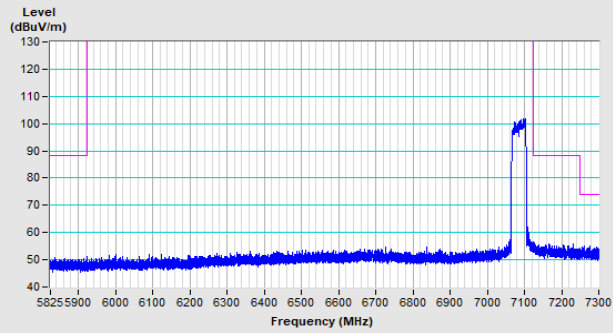


Horizontal (Peak)

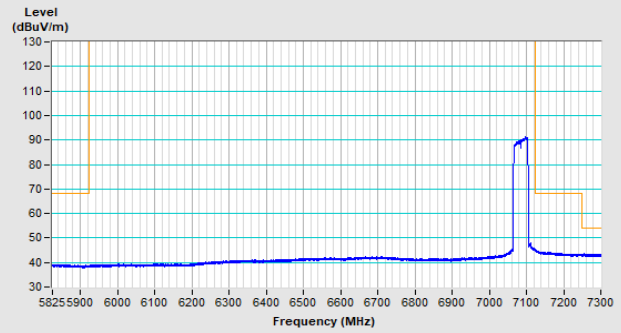

Horizontal (Average)

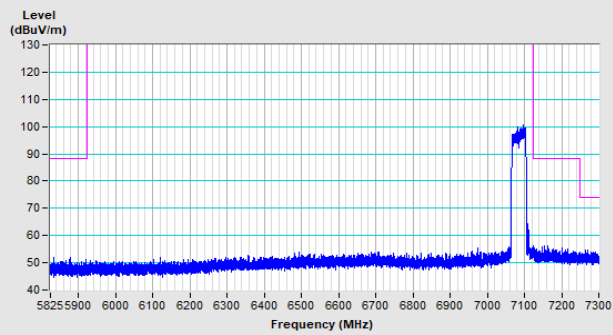

Vertical (Peak)

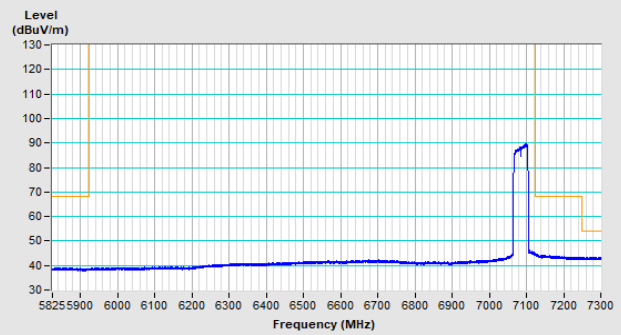

Vertical (Average)