



802.11be (EHT20) 52-tone RU Channel 233

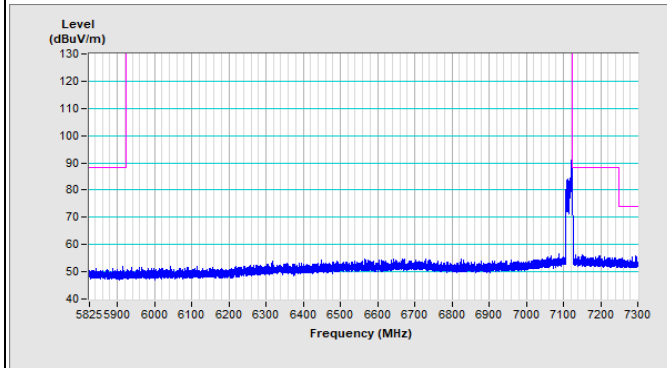


Horizontal (Peak)

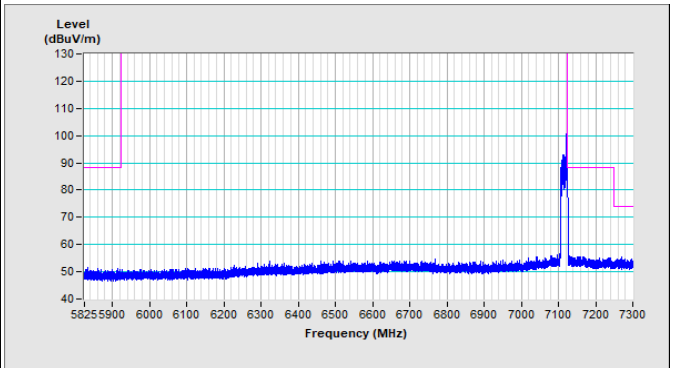


Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233

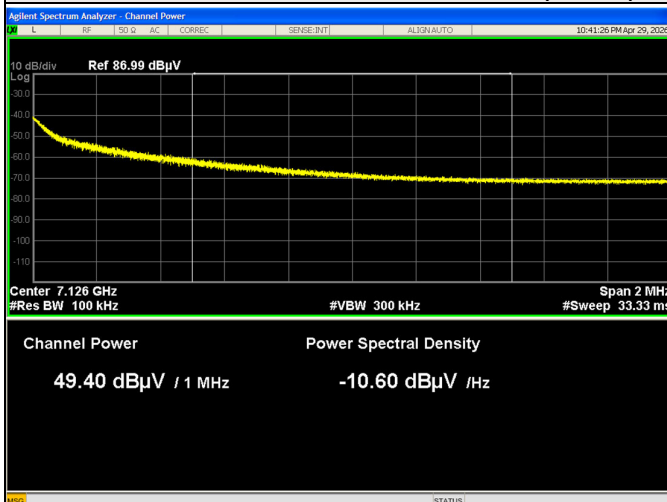


Horizontal (Average)

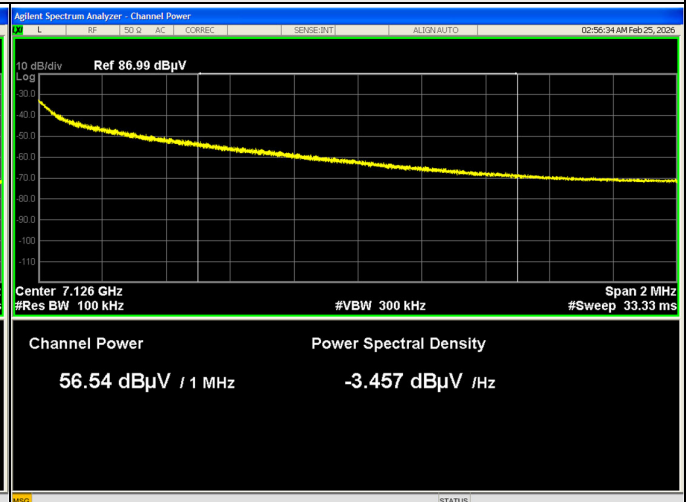


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

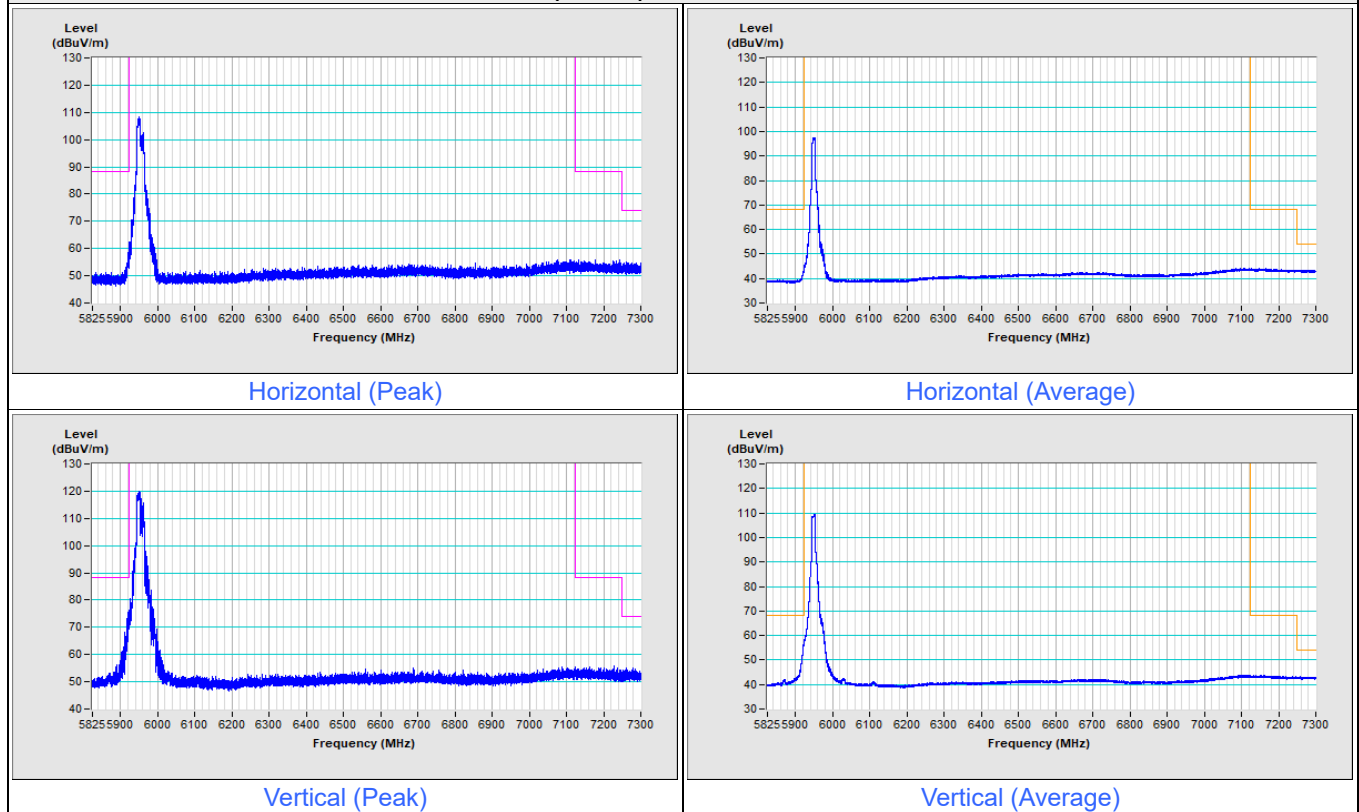

802.11be (EHT20) 106-tone RU Channel 233

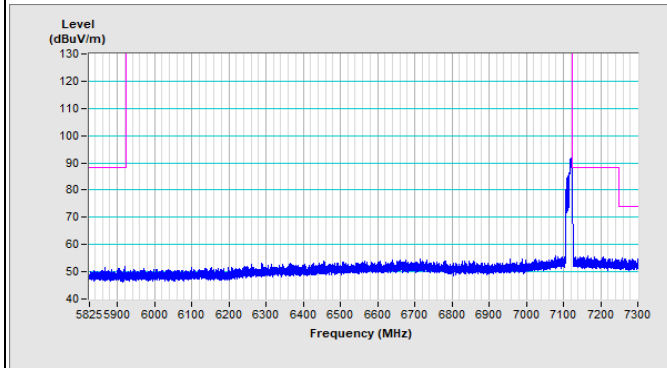


Horizontal (Peak)

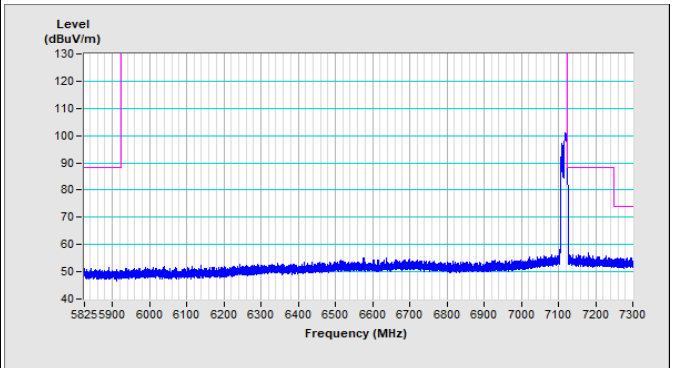

Vertical (Peak)

For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

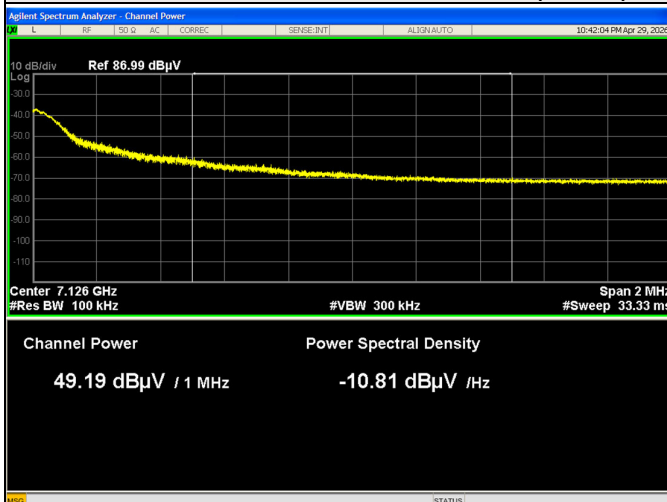


Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

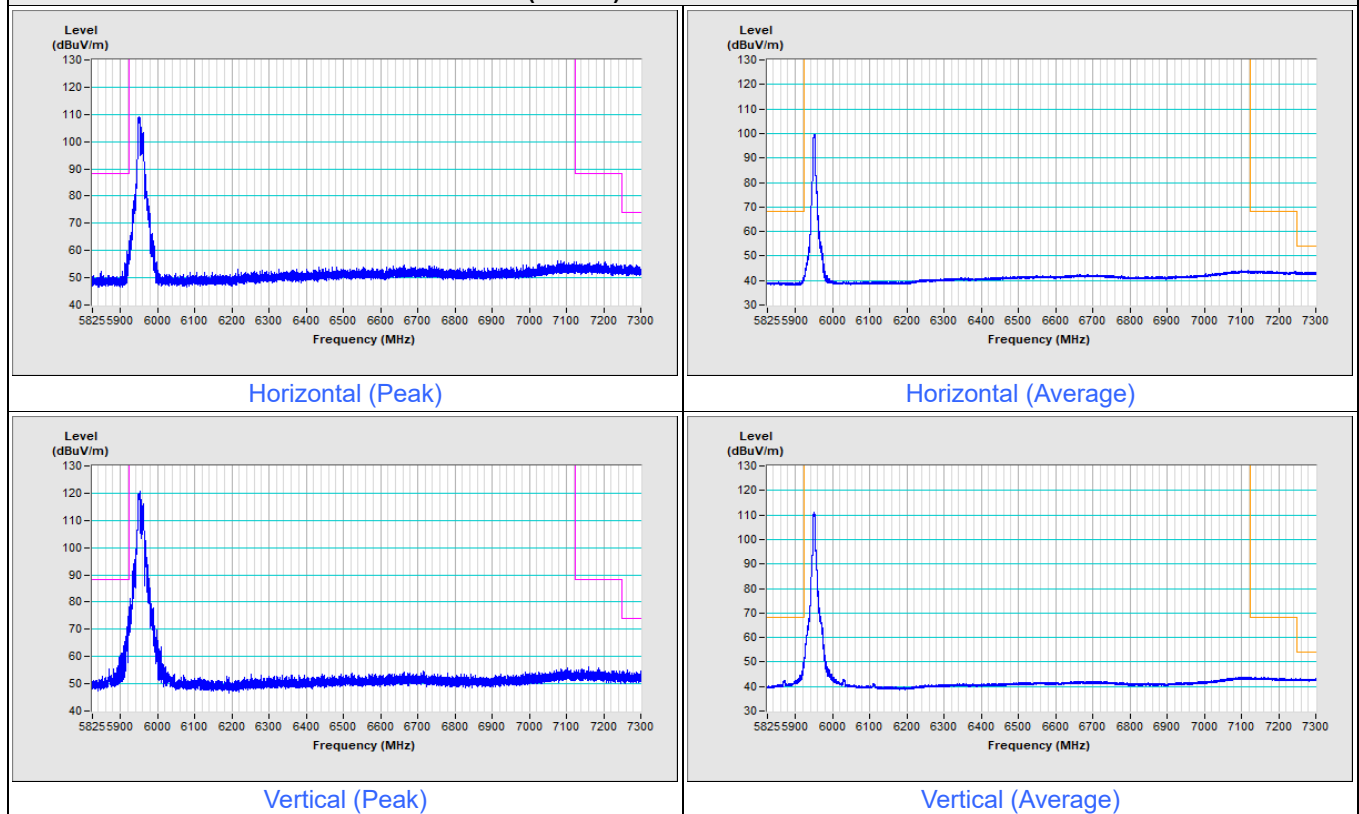


802.11be (EHT20) 52+26-tone MRU Channel 233

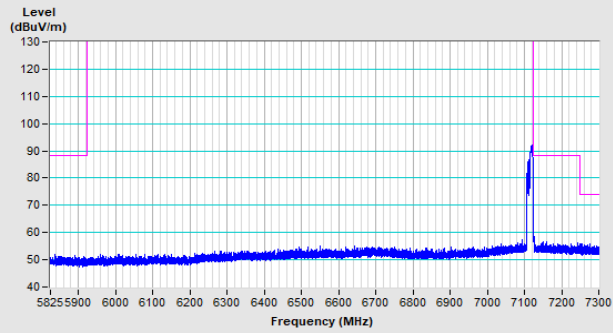


Horizontal (Peak)

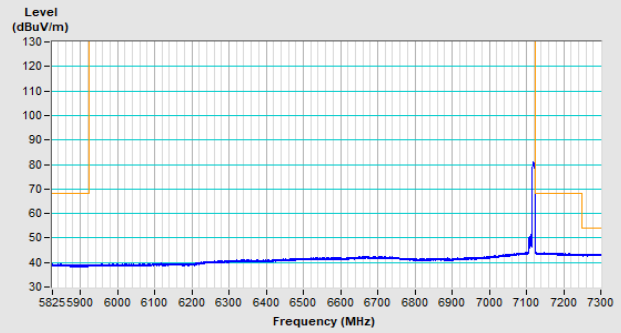

Horizontal (Average)

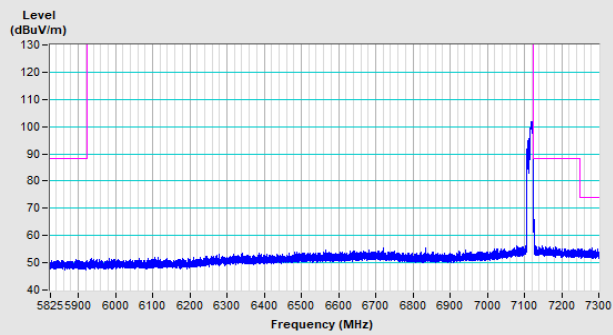


Vertical (Peak)

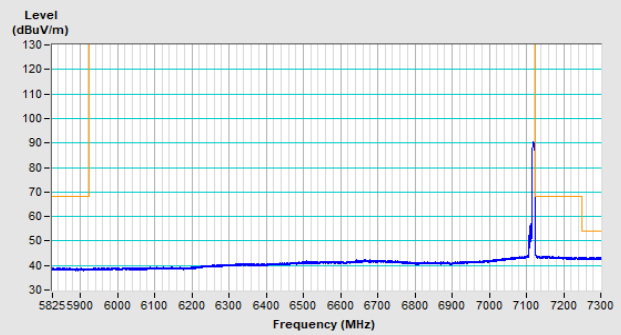


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

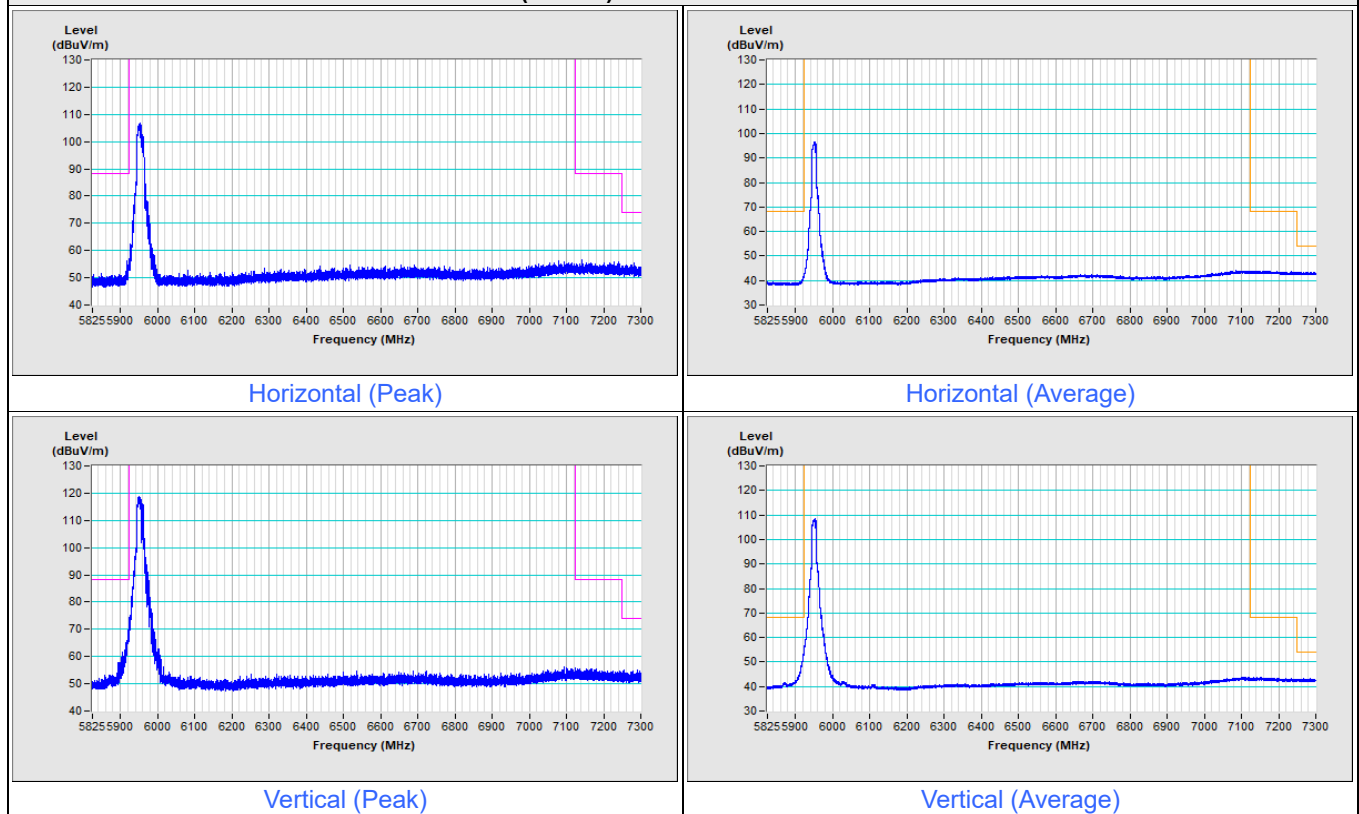

802.11be (EHT20) 106+26-tone MRU Channel 233

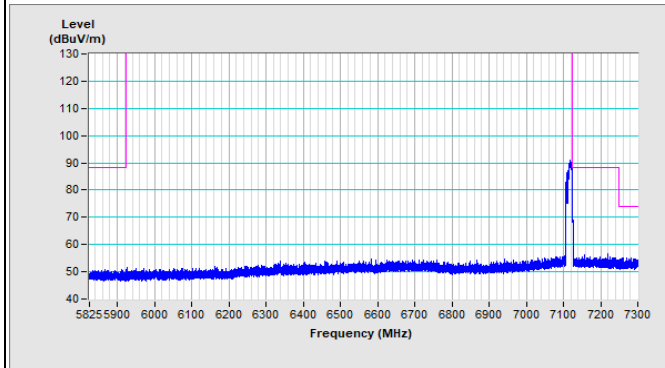

Horizontal (Peak)

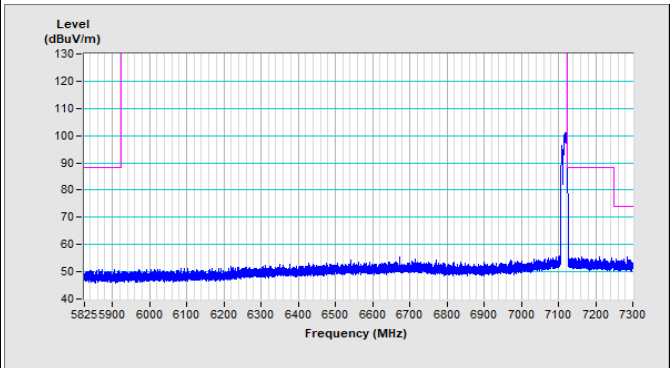


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233




Horizontal (Average)

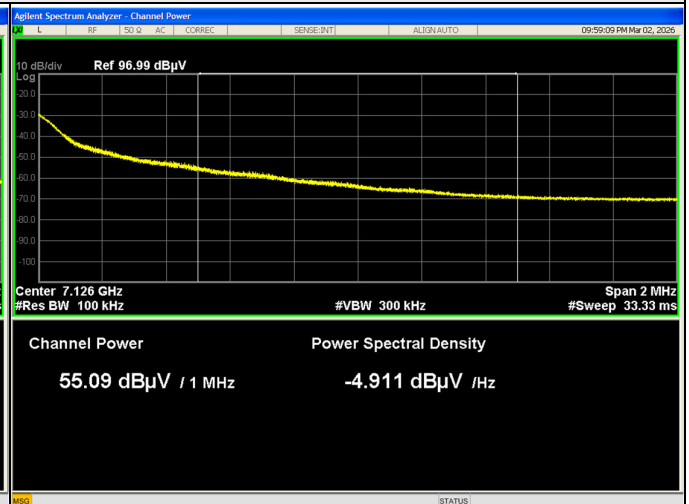


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

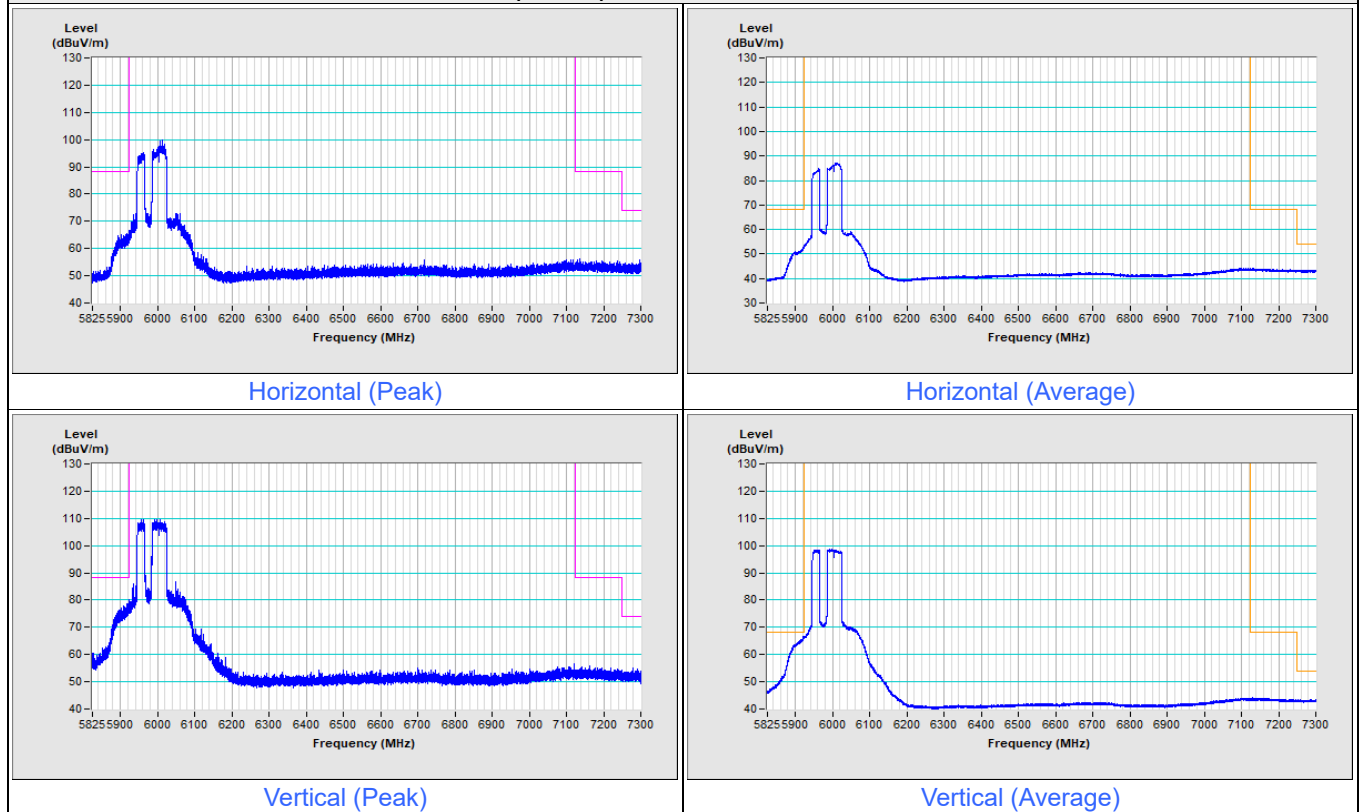


802.11be (EHT80) 484+242-tone MRU Channel 215

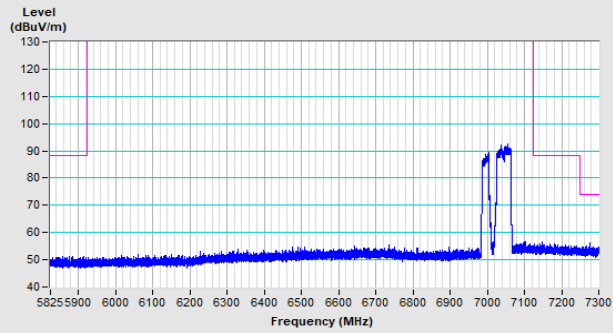


Horizontal (Peak)

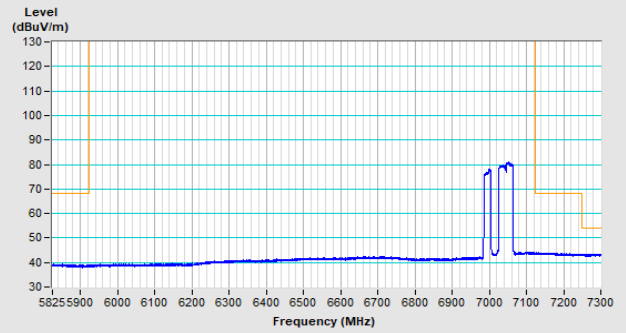

Horizontal (Average)

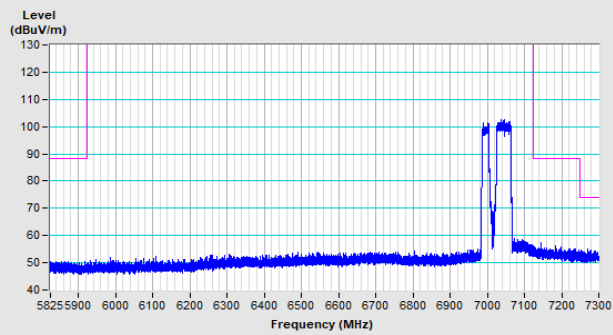


Vertical (Peak)

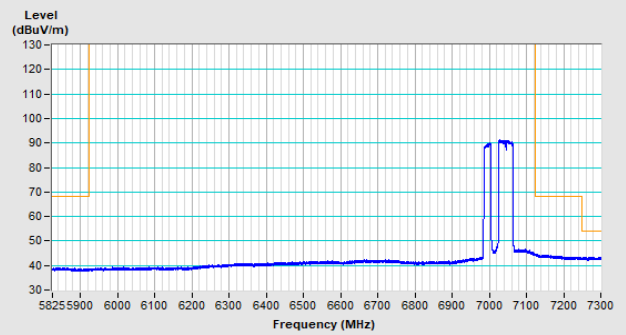


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

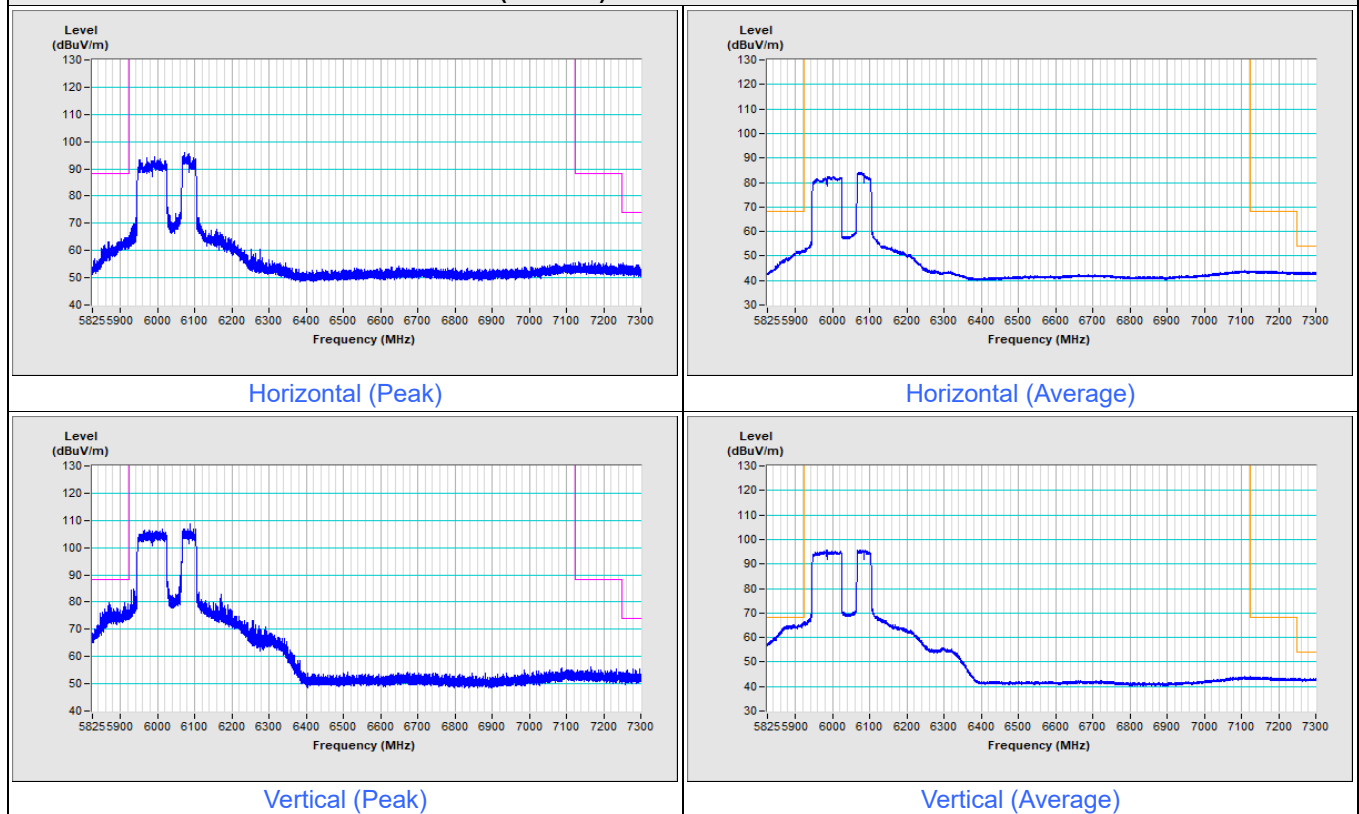


802.11be (EHT160) 996+484-tone MRU Channel 207

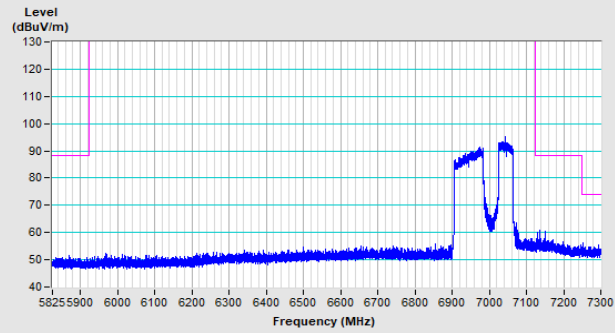


Horizontal (Peak)

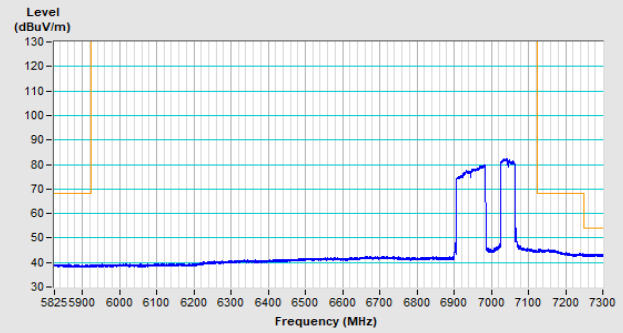

Horizontal (Average)

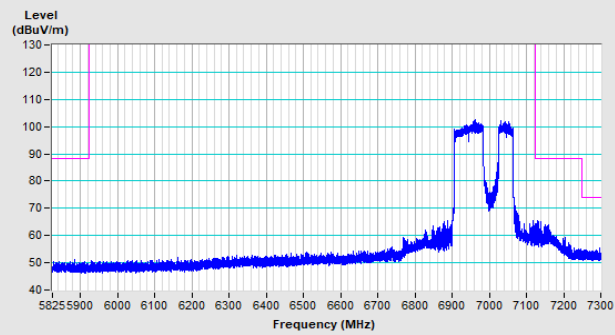


Vertical (Peak)

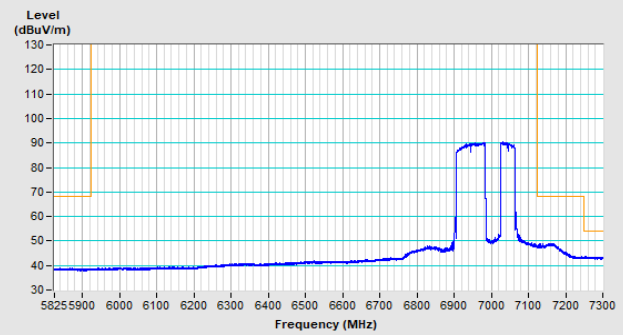


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

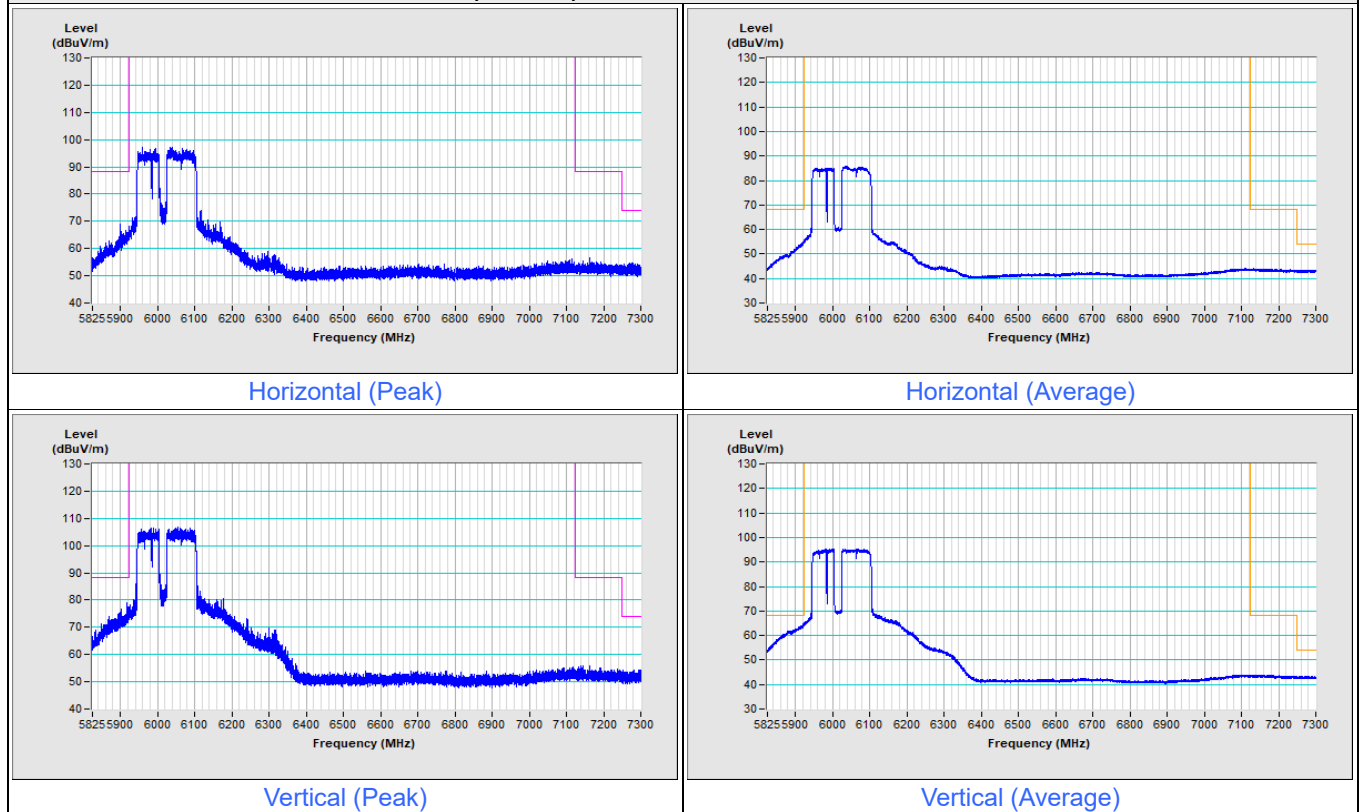


802.11be (EHT160) 996+484+242-tone MRU Channel 207

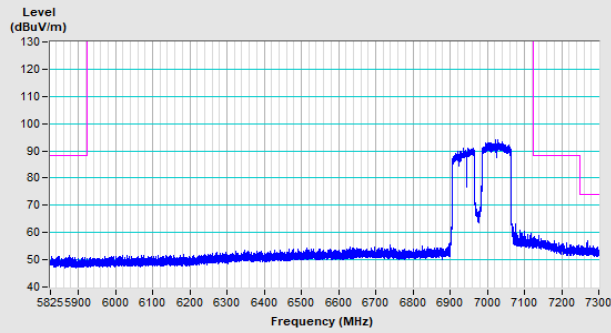


Horizontal (Peak)

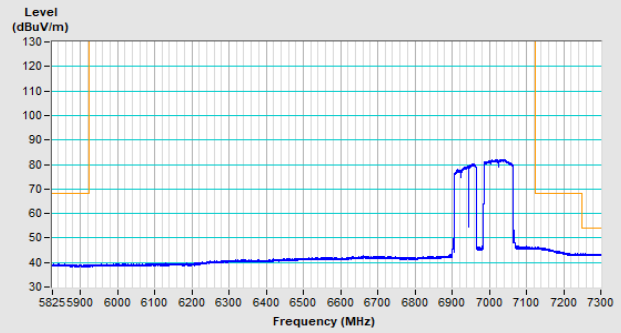

Horizontal (Average)

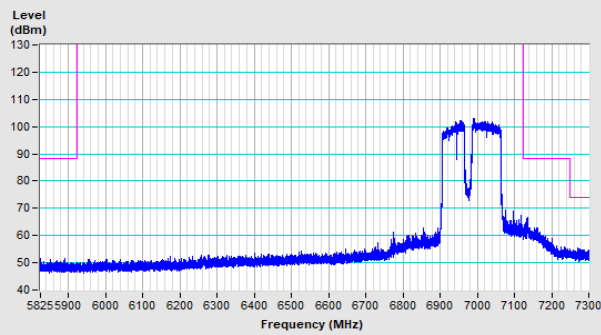

Vertical (Peak)

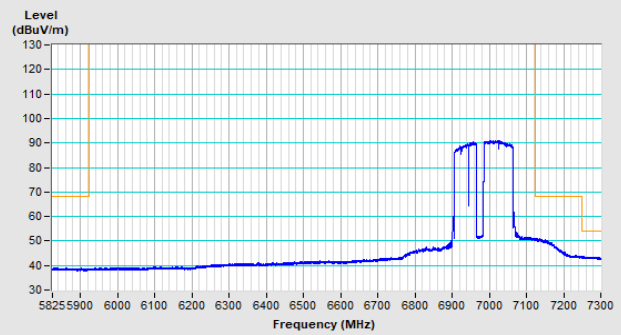

Vertical (Average)

Standard client
Mode A
1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.5 PK	88.2	-20.7	2.15 H	159	63.2	4.3
2	#5925.00	54.4 AV	68.2	-13.8	2.15 H	159	50.1	4.3
3	*5955.00	113.4 PK			2.15 H	159	108.9	4.5
4	*5955.00	104.1 AV			2.15 H	159	99.6	4.5
5	11910.00	50.3 PK	74.0	-23.7	3.84 H	347	38.1	12.2
6	11910.00	38.6 AV	54.0	-15.4	3.84 H	347	26.4	12.2
7	17865.00	56.1 PK	74.0	-17.9	3.99 H	249	34.2	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.99 H	249	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	1.47 V	200	68.5	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.47 V	200	53.1	4.3
3	*5955.00	114.1 PK			1.47 V	200	109.6	4.5
4	*5955.00	105.1 AV			1.47 V	200	100.6	4.5
5	11910.00	50.3 PK	74.0	-23.7	3.26 V	337	38.1	12.2
6	11910.00	37.9 AV	54.0	-16.1	3.26 V	337	25.7	12.2
7	17865.00	55.4 PK	74.0	-18.6	3.51 V	120	33.5	21.9
8	17865.00	43.1 AV	54.0	-10.9	3.51 V	120	21.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.4 PK			2.16 H	155	108.6	4.8
2	*6195.00	104.2 AV			2.16 H	155	99.4	4.8
3	12390.00	50.3 PK	74.0	-23.7	3.84 H	347	38.0	12.3
4	12390.00	38.6 AV	54.0	-15.4	3.84 H	347	26.3	12.3
5	18585.00	56.1 PK	74.0	-17.9	3.99 H	249	61.1	-5.0
6	18585.00	44.2 AV	54.0	-9.8	3.99 H	249	49.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.1 PK			1.47 V	200	109.3	4.8
2	*6195.00	105.1 AV			1.47 V	200	100.3	4.8
3	12390.00	49.8 PK	74.0	-24.2	3.25 V	337	37.5	12.3
4	12390.00	37.5 AV	54.0	-16.5	3.25 V	337	25.2	12.3
5	18585.00	55.3 PK	74.0	-18.7	3.46 V	125	60.3	-5.0
6	18585.00	42.9 AV	54.0	-11.1	3.46 V	125	47.9	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.5 PK			2.21 H	154	107.1	6.4
2	*6415.00	104.1 AV			2.21 H	154	97.7	6.4
3	#12830.00	50.3 PK	88.2	-37.9	3.84 H	347	37.3	13.0
4	#12830.00	38.6 AV	68.2	-29.6	3.84 H	347	25.6	13.0
5	19245.00	56.1 PK	74.0	-17.9	3.99 H	249	59.9	-3.8
6	19245.00	44.2 AV	54.0	-9.8	3.99 H	249	48.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.1 PK			1.47 V	200	107.7	6.4
2	*6415.00	105.1 AV			1.47 V	200	98.7	6.4
3	#12830.00	49.9 PK	88.2	-38.3	3.20 V	324	36.9	13.0
4	#12830.00	37.6 AV	68.2	-30.6	3.20 V	324	24.6	13.0
5	19245.00	55.4 PK	74.0	-18.6	3.54 V	135	59.2	-3.8
6	19245.00	43.0 AV	54.0	-11.0	3.54 V	135	46.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.0 PK			2.09 H	174	107.1	6.9
2	*6535.00	104.6 AV			2.09 H	174	97.7	6.9
3	#13070.00	50.3 PK	88.2	-37.9	3.84 H	347	37.1	13.2
4	#13070.00	38.6 AV	68.2	-29.6	3.84 H	347	25.4	13.2
5	19605.00	56.1 PK	74.0	-17.9	3.99 H	249	60.1	-4.0
6	19605.00	44.2 AV	54.0	-9.8	3.99 H	249	48.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.1 PK			1.47 V	200	107.2	6.9
2	*6535.00	105.1 AV			1.47 V	200	98.2	6.9
3	#13070.00	51.1 PK	88.2	-37.1	3.22 V	339	37.9	13.2
4	#13070.00	38.4 AV	68.2	-29.8	3.22 V	339	25.2	13.2
5	19605.00	55.0 PK	74.0	-19.0	3.53 V	120	59.0	-4.0
6	19605.00	42.7 AV	54.0	-11.3	3.53 V	120	46.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.0 PK			2.13 H	157	106.8	7.2
2	*6695.00	104.5 AV			2.13 H	157	97.3	7.2
3	13390.00	50.3 PK	74.0	-23.7	3.84 H	347	36.3	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.84 H	347	24.6	14.0
5	20085.00	56.1 PK	74.0	-17.9	3.99 H	249	59.6	-3.5
6	20085.00	44.2 AV	54.0	-9.8	3.99 H	249	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.1 PK			1.47 V	200	106.9	7.2
2	*6695.00	105.1 AV			1.47 V	200	97.9	7.2
3	13390.00	50.3 PK	74.0	-23.7	3.29 V	337	36.3	14.0
4	13390.00	38.1 AV	54.0	-15.9	3.29 V	337	24.1	14.0
5	20085.00	55.7 PK	74.0	-18.3	3.51 V	124	59.2	-3.5
6	20085.00	43.1 AV	54.0	-10.9	3.51 V	124	46.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.6 PK			2.11 H	163	106.4	7.2
2	*6855.00	104.6 AV			2.11 H	163	97.4	7.2
3	#13710.00	50.3 PK	88.2	-37.9	3.84 H	347	35.1	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.84 H	347	23.4	15.2
5	20565.00	56.1 PK	74.0	-17.9	3.99 H	249	59.4	-3.3
6	20565.00	44.2 AV	54.0	-9.8	3.99 H	249	47.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.1 PK			1.47 V	200	106.9	7.2
2	*6855.00	105.1 AV			1.47 V	200	97.9	7.2
3	#13710.00	49.6 PK	88.2	-38.6	3.29 V	341	34.4	15.2
4	#13710.00	37.5 AV	68.2	-30.7	3.29 V	341	22.3	15.2
5	20565.00	55.4 PK	74.0	-18.6	3.52 V	109	58.7	-3.3
6	20565.00	42.8 AV	54.0	-11.2	3.52 V	109	46.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1Tx NSS1

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.4 PK	88.2	-19.8	2.23 H	131	64.1	4.3
2	#5925.00	56.7 AV	68.2	-11.5	2.23 H	131	52.4	4.3
3	*5955.00	114.6 PK			2.23 H	131	110.1	4.5
4	*5955.00	103.4 AV			2.23 H	131	98.9	4.5
5	11910.00	50.6 PK	74.0	-23.4	3.82 H	352	38.4	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.82 H	352	26.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.94 H	251	34.4	21.9
8	17865.00	44.6 AV	54.0	-9.4	3.94 H	251	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.2 PK	88.2	-18.0	2.02 V	176	65.9	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.02 V	176	55.6	4.3
3	*5955.00	116.3 PK			2.02 V	176	111.8	4.5
4	*5955.00	105.3 AV			2.02 V	176	100.8	4.5
5	11910.00	49.4 PK	74.0	-24.6	3.30 V	342	37.2	12.2
6	11910.00	37.3 AV	54.0	-16.7	3.30 V	342	25.1	12.2
7	17865.00	55.7 PK	74.0	-18.3	3.54 V	104	33.8	21.9
8	17865.00	43.1 AV	54.0	-10.9	3.54 V	104	21.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.4 PK			2.27 H	131	109.6	4.8
2	*6195.00	103.5 AV			2.27 H	131	98.7	4.8
3	12390.00	51.0 PK	74.0	-23.0	3.89 H	360	38.7	12.3
4	12390.00	39.0 AV	54.0	-15.0	3.89 H	360	26.7	12.3
5	18585.00	55.6 PK	74.0	-18.4	3.98 H	262	60.6	-5.0
6	18585.00	43.7 AV	54.0	-10.3	3.98 H	262	48.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			2.08 V	173	111.8	4.8
2	*6195.00	105.6 AV			2.08 V	173	100.8	4.8
3	12390.00	50.0 PK	74.0	-24.0	3.33 V	335	37.7	12.3
4	12390.00	37.8 AV	54.0	-16.2	3.33 V	335	25.5	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.57 V	95	60.2	-5.0
6	18585.00	42.7 AV	54.0	-11.3	3.57 V	95	47.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.7 PK			2.22 H	127	108.3	6.4
2	*6415.00	103.6 AV			2.22 H	127	97.2	6.4
3	#12830.00	50.8 PK	88.2	-37.4	3.86 H	344	37.8	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.86 H	344	25.8	13.0
5	19245.00	55.8 PK	74.0	-18.2	4.00 H	254	59.6	-3.8
6	19245.00	43.9 AV	54.0	-10.1	4.00 H	254	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.2 PK			2.02 V	186	109.8	6.4
2	*6415.00	105.0 AV			2.02 V	186	98.6	6.4
3	#12830.00	49.7 PK	88.2	-38.5	3.28 V	334	36.7	13.0
4	#12830.00	37.6 AV	68.2	-30.6	3.28 V	334	24.6	13.0
5	19245.00	55.9 PK	74.0	-18.1	3.55 V	100	59.7	-3.8
6	19245.00	43.0 AV	54.0	-11.0	3.55 V	100	46.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.1 PK			2.21 H	146	107.2	6.9
2	*6535.00	103.0 AV			2.21 H	146	96.1	6.9
3	#13070.00	49.9 PK	88.2	-38.3	3.81 H	337	36.7	13.2
4	#13070.00	38.2 AV	68.2	-30.0	3.81 H	337	25.0	13.2
5	19605.00	56.3 PK	74.0	-17.7	4.00 H	245	60.3	-4.0
6	19605.00	44.5 AV	54.0	-9.5	4.00 H	245	48.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.9 PK			2.06 V	177	110.0	6.9
2	*6535.00	105.7 AV			2.06 V	177	98.8	6.9
3	#13070.00	50.1 PK	88.2	-38.1	3.25 V	338	36.9	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.25 V	338	24.7	13.2
5	19605.00	55.8 PK	74.0	-18.2	3.50 V	103	59.8	-4.0
6	19605.00	43.1 AV	54.0	-10.9	3.50 V	103	47.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.6 PK			2.17 H	118	107.4	7.2
2	*6695.00	103.6 AV			2.17 H	118	96.4	7.2
3	13390.00	50.5 PK	74.0	-23.5	3.87 H	341	36.5	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.87 H	341	24.6	14.0
5	20085.00	56.1 PK	74.0	-17.9	4.00 H	254	59.6	-3.5
6	20085.00	44.4 AV	54.0	-9.6	4.00 H	254	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.1 PK			1.97 V	184	109.9	7.2
2	*6695.00	105.8 AV			1.97 V	184	98.6	7.2
3	13390.00	49.3 PK	74.0	-24.7	3.35 V	331	35.3	14.0
4	13390.00	37.4 AV	54.0	-16.6	3.35 V	331	23.4	14.0
5	20085.00	55.2 PK	74.0	-18.8	3.50 V	94	58.7	-3.5
6	20085.00	42.8 AV	54.0	-11.2	3.50 V	94	46.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	113.9 PK			2.26 H	115	106.7	7.2
2	*6855.00	103.0 AV			2.26 H	115	95.8	7.2
3	#13710.00	50.3 PK	88.2	-37.9	3.82 H	360	35.1	15.2
4	#13710.00	38.7 AV	68.2	-29.5	3.82 H	360	23.5	15.2
5	20565.00	56.6 PK	74.0	-17.4	3.95 H	258	59.9	-3.3
6	20565.00	44.5 AV	54.0	-9.5	3.95 H	258	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.9 PK			1.96 V	185	109.7	7.2
2	*6855.00	105.8 AV			1.96 V	185	98.6	7.2
3	#13710.00	49.7 PK	88.2	-38.5	3.34 V	352	34.5	15.2
4	#13710.00	37.3 AV	68.2	-30.9	3.34 V	352	22.1	15.2
5	20565.00	55.5 PK	74.0	-18.5	3.56 V	123	58.8	-3.3
6	20565.00	42.6 AV	54.0	-11.4	3.56 V	123	45.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	2.23 H	132	75.0	4.3
2	#5925.00	66.1 AV	68.2	-2.1	2.23 H	132	61.8	4.3
3	*5965.00	110.5 PK			2.23 H	132	106.1	4.4
4	*5965.00	98.6 AV			2.23 H	132	94.2	4.4
5	11930.00	50.6 PK	74.0	-23.4	3.88 H	360	38.5	12.1
6	11930.00	38.8 AV	54.0	-15.2	3.88 H	360	26.7	12.1
7	17895.00	56.9 PK	74.0	-17.1	3.92 H	272	34.6	22.3
8	17895.00	45.0 AV	54.0	-9.0	3.92 H	272	22.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.4 PK	88.2	-8.8	1.59 V	182	75.1	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.59 V	182	62.3	4.3
3	*5965.00	113.4 PK			1.59 V	182	109.0	4.4
4	*5965.00	100.5 AV			1.59 V	182	96.1	4.4
5	11930.00	50.1 PK	74.0	-23.9	3.37 V	336	38.0	12.1
6	11930.00	37.5 AV	54.0	-16.5	3.37 V	336	25.4	12.1
7	17895.00	55.5 PK	74.0	-18.5	3.60 V	123	33.2	22.3
8	17895.00	42.3 AV	54.0	-11.7	3.60 V	123	20.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	110.1 PK			2.18 H	134	105.2	4.9
2	*6205.00	98.1 AV			2.18 H	134	93.2	4.9
3	12410.00	50.6 PK	74.0	-23.4	3.88 H	348	38.3	12.3
4	12410.00	39.1 AV	54.0	-14.9	3.88 H	348	26.8	12.3
5	18615.00	56.6 PK	74.0	-17.4	3.98 H	267	61.5	-4.9
6	18615.00	44.7 AV	54.0	-9.3	3.98 H	267	49.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	113.1 PK			1.54 V	168	108.2	4.9
2	*6205.00	100.5 AV			1.54 V	168	95.6	4.9
3	12410.00	49.6 PK	74.0	-24.4	3.32 V	360	37.3	12.3
4	12410.00	37.5 AV	54.0	-16.5	3.32 V	360	25.2	12.3
5	18615.00	55.9 PK	74.0	-18.1	3.61 V	114	60.8	-4.9
6	18615.00	43.0 AV	54.0	-11.0	3.61 V	114	47.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.1 PK			2.27 H	130	103.7	6.4
2	*6405.00	98.2 AV			2.27 H	130	91.8	6.4
3	#12810.00	50.5 PK	88.2	-37.7	3.79 H	352	37.7	12.8
4	#12810.00	38.6 AV	68.2	-29.6	3.79 H	352	25.8	12.8
5	19215.00	57.0 PK	74.0	-17.0	3.95 H	260	60.7	-3.7
6	19215.00	45.0 AV	54.0	-9.0	3.95 H	260	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	112.6 PK			1.65 V	188	106.2	6.4
2	*6405.00	100.0 AV			1.65 V	188	93.6	6.4
3	#12810.00	49.5 PK	88.2	-38.7	3.34 V	345	36.7	12.8
4	#12810.00	37.1 AV	68.2	-31.1	3.34 V	345	24.3	12.8
5	19215.00	55.6 PK	74.0	-18.4	3.57 V	122	59.3	-3.7
6	19215.00	42.8 AV	54.0	-11.2	3.57 V	122	46.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.5 PK			2.23 H	134	103.6	6.9
2	*6565.00	98.7 AV			2.23 H	134	91.8	6.9
3	#13130.00	49.8 PK	88.2	-38.4	3.81 H	360	36.6	13.2
4	#13130.00	38.3 AV	68.2	-29.9	3.81 H	360	25.1	13.2
5	19695.00	56.3 PK	74.0	-17.7	3.91 H	247	60.2	-3.9
6	19695.00	44.4 AV	54.0	-9.6	3.91 H	247	48.3	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	113.6 PK			1.60 V	186	106.7	6.9
2	*6565.00	100.9 AV			1.60 V	186	94.0	6.9
3	#13130.00	50.0 PK	88.2	-38.2	3.29 V	342	36.8	13.2
4	#13130.00	37.5 AV	68.2	-30.7	3.29 V	342	24.3	13.2
5	19695.00	55.4 PK	74.0	-18.6	3.52 V	127	59.3	-3.9
6	19695.00	42.3 AV	54.0	-11.7	3.52 V	127	46.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.3 PK			2.24 H	130	103.1	7.2
2	*6685.00	98.6 AV			2.24 H	130	91.4	7.2
3	13370.00	50.9 PK	74.0	-23.1	3.84 H	360	36.9	14.0
4	13370.00	39.0 AV	54.0	-15.0	3.84 H	360	25.0	14.0
5	20055.00	56.7 PK	74.0	-17.3	3.93 H	248	60.2	-3.5
6	20055.00	44.9 AV	54.0	-9.1	3.93 H	248	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.2 PK			1.61 V	195	106.0	7.2
2	*6685.00	100.2 AV			1.61 V	195	93.0	7.2
3	13370.00	49.1 PK	74.0	-24.9	3.33 V	360	35.1	14.0
4	13370.00	36.9 AV	54.0	-17.1	3.33 V	360	22.9	14.0
5	20055.00	55.8 PK	74.0	-18.2	3.52 V	117	59.3	-3.5
6	20055.00	43.0 AV	54.0	-11.0	3.52 V	117	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.2 PK			2.23 H	128	103.1	7.1
2	*6845.00	98.4 AV			2.23 H	128	91.3	7.1
3	#13690.00	50.3 PK	88.2	-37.9	3.88 H	352	35.2	15.1
4	#13690.00	38.6 AV	68.2	-29.6	3.88 H	352	23.5	15.1
5	20535.00	56.2 PK	74.0	-17.8	3.96 H	271	59.4	-3.2
6	20535.00	44.2 AV	54.0	-9.8	3.96 H	271	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.7 PK			1.61 V	180	106.6	7.1
2	*6845.00	100.9 AV			1.61 V	180	93.8	7.1
3	#13690.00	50.0 PK	88.2	-38.2	3.35 V	349	34.9	15.1
4	#13690.00	37.8 AV	68.2	-30.4	3.35 V	349	22.7	15.1
5	20535.00	55.4 PK	74.0	-18.6	3.60 V	131	58.6	-3.2
6	20535.00	42.4 AV	54.0	-11.6	3.60 V	131	45.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.3 PK	88.2	-13.9	2.20 H	132	70.0	4.3
2	#5925.00	63.2 AV	68.2	-5.0	2.20 H	132	58.9	4.3
3	*5985.00	107.9 PK			2.20 H	132	103.5	4.4
4	*5985.00	96.3 AV			2.20 H	132	91.9	4.4
5	11970.00	50.0 PK	74.0	-24.0	3.93 H	356	37.8	12.2
6	11970.00	38.6 AV	54.0	-15.4	3.93 H	356	26.4	12.2
7	17955.00	55.9 PK	74.0	-18.1	3.98 H	283	32.5	23.4
8	17955.00	43.9 AV	54.0	-10.1	3.98 H	283	20.5	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.59 V	182	72.2	4.3
2	#5925.00	65.8 AV	68.2	-2.4	1.59 V	182	61.5	4.3
3	*5985.00	109.8 PK			1.59 V	182	105.4	4.4
4	*5985.00	97.7 AV			1.59 V	182	93.3	4.4
5	11970.00	50.0 PK	74.0	-24.0	3.33 V	340	37.8	12.2
6	11970.00	37.6 AV	54.0	-16.4	3.33 V	340	25.4	12.2
7	17955.00	55.7 PK	74.0	-18.3	3.56 V	143	32.3	23.4
8	17955.00	42.8 AV	54.0	-11.2	3.56 V	143	19.4	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.6 PK			2.26 H	127	102.6	5.0
2	*6225.00	95.9 AV			2.26 H	127	90.9	5.0
3	12450.00	51.0 PK	74.0	-23.0	3.90 H	340	38.7	12.3
4	12450.00	39.1 AV	54.0	-14.9	3.90 H	340	26.8	12.3
5	18675.00	55.8 PK	74.0	-18.2	4.00 H	286	60.7	-4.9
6	18675.00	43.9 AV	54.0	-10.1	4.00 H	286	48.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.8 PK			1.53 V	195	104.8	5.0
2	*6225.00	97.5 AV			1.53 V	195	92.5	5.0
3	12450.00	49.9 PK	74.0	-24.1	3.29 V	350	37.6	12.3
4	12450.00	37.8 AV	54.0	-16.2	3.29 V	350	25.5	12.3
5	18675.00	55.8 PK	74.0	-18.2	3.59 V	133	60.7	-4.9
6	18675.00	42.8 AV	54.0	-11.2	3.59 V	133	47.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.8 PK			2.26 H	143	101.6	6.2
2	*6385.00	96.1 AV			2.26 H	143	89.9	6.2
3	#12770.00	51.0 PK	88.2	-37.2	3.86 H	360	38.2	12.8
4	#12770.00	39.0 AV	68.2	-29.2	3.86 H	360	26.2	12.8
5	19155.00	56.5 PK	74.0	-17.5	3.99 H	280	60.3	-3.8
6	19155.00	44.4 AV	54.0	-9.6	3.99 H	280	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.4 PK			1.55 V	167	103.2	6.2
2	*6385.00	97.3 AV			1.55 V	167	91.1	6.2
3	#12770.00	49.5 PK	88.2	-38.7	3.38 V	360	36.7	12.8
4	#12770.00	37.3 AV	68.2	-30.9	3.38 V	360	24.5	12.8
5	19155.00	55.1 PK	74.0	-18.9	3.64 V	131	58.9	-3.8
6	19155.00	42.0 AV	54.0	-12.0	3.64 V	131	45.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.7 PK			2.15 H	123	100.8	6.9
2	*6625.00	96.0 AV			2.15 H	123	89.1	6.9
3	13250.00	50.2 PK	74.0	-23.8	3.88 H	360	36.6	13.6
4	13250.00	38.3 AV	54.0	-15.7	3.88 H	360	24.7	13.6
5	19875.00	55.9 PK	74.0	-18.1	3.99 H	281	59.4	-3.5
6	19875.00	43.9 AV	54.0	-10.1	3.99 H	281	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.9 PK			1.58 V	186	103.0	6.9
2	*6625.00	97.7 AV			1.58 V	186	90.8	6.9
3	13250.00	49.9 PK	74.0	-24.1	3.41 V	348	36.3	13.6
4	13250.00	37.5 AV	54.0	-16.5	3.41 V	348	23.9	13.6
5	19875.00	55.2 PK	74.0	-18.8	3.60 V	124	58.7	-3.5
6	19875.00	42.4 AV	54.0	-11.6	3.60 V	124	45.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.9 PK			2.22 H	129	100.7	7.2
2	*6705.00	96.5 AV			2.22 H	129	89.3	7.2
3	#13410.00	50.2 PK	88.2	-38.0	3.83 H	353	36.0	14.2
4	#13410.00	38.3 AV	68.2	-29.9	3.83 H	353	24.1	14.2
5	20115.00	56.3 PK	74.0	-17.7	3.96 H	275	59.8	-3.5
6	20115.00	44.6 AV	54.0	-9.4	3.96 H	275	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.2 PK			1.55 V	171	103.0	7.2
2	*6705.00	97.9 AV			1.55 V	171	90.7	7.2
3	#13410.00	49.8 PK	88.2	-38.4	3.34 V	352	35.6	14.2
4	#13410.00	37.9 AV	68.2	-30.3	3.34 V	352	23.7	14.2
5	20115.00	55.0 PK	74.0	-19.0	3.62 V	144	58.5	-3.5
6	20115.00	42.2 AV	54.0	-11.8	3.62 V	144	45.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.2 PK			2.19 H	135	101.2	7.0
2	*6785.00	96.3 AV			2.19 H	135	89.3	7.0
3	#13570.00	50.2 PK	88.2	-38.0	3.85 H	360	35.6	14.6
4	#13570.00	38.3 AV	68.2	-29.9	3.85 H	360	23.7	14.6
5	20355.00	56.1 PK	74.0	-17.9	3.94 H	272	59.2	-3.1
6	20355.00	44.0 AV	54.0	-10.0	3.94 H	272	47.1	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.6 PK			1.56 V	186	102.6	7.0
2	*6785.00	97.5 AV			1.56 V	186	90.5	7.0
3	#13570.00	50.6 PK	88.2	-37.6	3.32 V	353	36.0	14.6
4	#13570.00	38.2 AV	68.2	-30.0	3.32 V	353	23.6	14.6
5	20355.00	55.1 PK	74.0	-18.9	3.59 V	144	58.2	-3.1
6	20355.00	42.2 AV	54.0	-11.8	3.59 V	144	45.3	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.3 PK	88.2	-13.9	2.24 H	298	70.0	4.3
2	#5925.00	63.6 AV	68.2	-4.6	2.24 H	298	59.3	4.3
3	*6025.00	105.0 PK			2.24 H	298	100.8	4.2
4	*6025.00	93.8 AV			2.24 H	298	89.6	4.2
5	12050.00	49.8 PK	74.0	-24.2	3.83 H	360	37.4	12.4
6	12050.00	37.8 AV	54.0	-16.2	3.83 H	360	25.4	12.4
7	18075.00	56.5 PK	74.0	-17.5	3.90 H	281	61.2	-4.7
8	18075.00	44.5 AV	54.0	-9.5	3.90 H	281	49.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.50 V	199	72.5	4.3
2	#5925.00	65.2 AV	68.2	-3.0	1.50 V	199	60.9	4.3
3	*6025.00	107.5 PK			1.50 V	199	103.3	4.2
4	*6025.00	95.2 AV			1.50 V	199	91.0	4.2
5	12050.00	51.2 PK	74.0	-22.8	3.29 V	360	38.8	12.4
6	12050.00	38.5 AV	54.0	-15.5	3.29 V	360	26.1	12.4
7	18075.00	54.7 PK	74.0	-19.3	3.58 V	156	59.4	-4.7
8	18075.00	41.9 AV	54.0	-12.1	3.58 V	156	46.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.2 PK			2.29 H	296	100.4	4.8
2	*6185.00	94.3 AV			2.29 H	296	89.5	4.8
3	12370.00	49.5 PK	74.0	-24.5	3.89 H	360	37.2	12.3
4	12370.00	37.9 AV	54.0	-16.1	3.89 H	360	25.6	12.3
5	18555.00	56.2 PK	74.0	-17.8	3.92 H	265	61.1	-4.9
6	18555.00	44.3 AV	54.0	-9.7	3.92 H	265	49.2	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.6 PK			1.49 V	207	102.8	4.8
2	*6185.00	95.2 AV			1.49 V	207	90.4	4.8
3	12370.00	51.0 PK	74.0	-23.0	3.34 V	359	38.7	12.3
4	12370.00	38.6 AV	54.0	-15.4	3.34 V	359	26.3	12.3
5	18555.00	55.4 PK	74.0	-18.6	3.57 V	155	60.3	-4.9
6	18555.00	42.4 AV	54.0	-11.6	3.57 V	155	47.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			2.22 H	282	99.2	6.1
2	*6345.00	94.1 AV			2.22 H	282	88.0	6.1
3	12690.00	49.9 PK	74.0	-24.1	3.90 H	354	37.0	12.9
4	12690.00	38.0 AV	54.0	-16.0	3.90 H	354	25.1	12.9
5	19035.00	56.3 PK	74.0	-17.7	3.88 H	258	60.2	-3.9
6	19035.00	44.3 AV	54.0	-9.7	3.88 H	258	48.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.7 PK			1.49 V	187	101.6	6.1
2	*6345.00	95.4 AV			1.49 V	187	89.3	6.1
3	12690.00	51.1 PK	74.0	-22.9	3.25 V	360	38.2	12.9
4	12690.00	38.6 AV	54.0	-15.4	3.25 V	360	25.7	12.9
5	19035.00	54.4 PK	74.0	-19.6	3.59 V	159	58.3	-3.9
6	19035.00	41.6 AV	54.0	-12.4	3.59 V	159	45.5	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.5 PK			2.23 H	301	97.3	7.2
2	*6665.00	93.4 AV			2.23 H	301	86.2	7.2
3	13330.00	50.6 PK	74.0	-23.4	3.91 H	359	36.8	13.8
4	13330.00	38.5 AV	54.0	-15.5	3.91 H	359	24.7	13.8
5	19995.00	56.3 PK	74.0	-17.7	3.91 H	270	59.9	-3.6
6	19995.00	44.0 AV	54.0	-10.0	3.91 H	270	47.6	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.5 PK			1.51 V	195	100.3	7.2
2	*6665.00	95.3 AV			1.51 V	195	88.1	7.2
3	13330.00	51.4 PK	74.0	-22.6	3.28 V	358	37.6	13.8
4	13330.00	38.8 AV	54.0	-15.2	3.28 V	358	25.0	13.8
5	19995.00	54.7 PK	74.0	-19.3	3.64 V	150	58.3	-3.6
6	19995.00	41.8 AV	54.0	-12.2	3.64 V	150	45.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.5 PK	88.2	-16.7	2.22 H	132	67.2	4.3
2	#5925.00	53.2 AV	68.2	-15.0	2.22 H	132	48.9	4.3
3	*5955.00	120.9 PK			2.22 H	132	116.4	4.5
4	*5955.00	113.1 AV			2.22 H	132	108.6	4.5
5	11910.00	50.5 PK	74.0	-23.5	3.86 H	360	38.3	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.86 H	360	26.3	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.89 H	285	34.4	21.9
8	17865.00	44.4 AV	54.0	-9.6	3.89 H	285	22.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	1.63 V	202	68.5	4.3
2	#5925.00	53.9 AV	68.2	-14.3	1.63 V	202	49.6	4.3
3	*5955.00	122.7 PK			1.63 V	202	118.2	4.5
4	*5955.00	113.7 AV			1.63 V	202	109.2	4.5
5	11910.00	51.8 PK	74.0	-22.2	3.28 V	343	39.6	12.2
6	11910.00	39.0 AV	54.0	-15.0	3.28 V	343	26.8	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.66 V	138	32.9	21.9
8	17865.00	41.9 AV	54.0	-12.1	3.66 V	138	20.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			2.22 H	132	116.1	4.8
2	*6195.00	113.1 AV			2.22 H	132	108.3	4.8
3	12390.00	50.5 PK	74.0	-23.5	3.86 H	360	38.2	12.3
4	12390.00	38.5 AV	54.0	-15.5	3.86 H	360	26.2	12.3
5	18585.00	56.3 PK	74.0	-17.7	3.89 H	285	61.3	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.89 H	285	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.3 PK			1.62 V	192	117.5	4.8
2	*6195.00	113.3 AV			1.62 V	192	108.5	4.8
3	12390.00	51.4 PK	74.0	-22.6	3.26 V	338	39.1	12.3
4	12390.00	38.5 AV	54.0	-15.5	3.26 V	338	26.2	12.3
5	18585.00	55.5 PK	74.0	-18.5	3.70 V	128	60.5	-5.0
6	18585.00	42.3 AV	54.0	-11.7	3.70 V	128	47.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.9 PK			2.22 H	132	114.5	6.4
2	*6415.00	113.1 AV			2.22 H	132	106.7	6.4
3	#12830.00	50.5 PK	88.2	-37.7	3.86 H	360	37.5	13.0
4	#12830.00	38.5 AV	68.2	-29.7	3.86 H	360	25.5	13.0
5	19245.00	56.3 PK	74.0	-17.7	3.89 H	285	60.1	-3.8
6	19245.00	44.4 AV	54.0	-9.6	3.89 H	285	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			1.64 V	207	116.3	6.4
2	*6415.00	113.9 AV			1.64 V	207	107.5	6.4
3	#12830.00	52.5 PK	88.2	-35.7	3.31 V	329	39.5	13.0
4	#12830.00	39.5 AV	68.2	-28.7	3.31 V	329	26.5	13.0
5	19245.00	54.2 PK	74.0	-19.8	3.64 V	150	58.0	-3.8
6	19245.00	41.6 AV	54.0	-12.4	3.64 V	150	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.9 PK			2.22 H	132	114.0	6.9
2	*6535.00	113.1 AV			2.22 H	132	106.2	6.9
3	#13070.00	50.5 PK	88.2	-37.7	3.86 H	360	37.3	13.2
4	#13070.00	38.5 AV	68.2	-29.7	3.86 H	360	25.3	13.2
5	19605.00	56.3 PK	74.0	-17.7	3.89 H	285	60.3	-4.0
6	19605.00	44.4 AV	54.0	-9.6	3.89 H	285	48.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.3 PK			1.65 V	191	115.4	6.9
2	*6535.00	113.2 AV			1.65 V	191	106.3	6.9
3	#13070.00	51.6 PK	88.2	-36.6	3.32 V	345	38.4	13.2
4	#13070.00	38.9 AV	68.2	-29.3	3.32 V	345	25.7	13.2
5	19605.00	54.7 PK	74.0	-19.3	3.61 V	140	58.7	-4.0
6	19605.00	41.5 AV	54.0	-12.5	3.61 V	140	45.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.9 PK			2.22 H	132	113.7	7.2
2	*6695.00	113.1 AV			2.22 H	132	105.9	7.2
3	13390.00	50.5 PK	74.0	-23.5	3.86 H	360	36.5	14.0
4	13390.00	38.5 AV	54.0	-15.5	3.86 H	360	24.5	14.0
5	20085.00	56.3 PK	74.0	-17.7	3.89 H	285	59.8	-3.5
6	20085.00	44.4 AV	54.0	-9.6	3.89 H	285	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			1.65 V	215	115.1	7.2
2	*6695.00	113.6 AV			1.65 V	215	106.4	7.2
3	13390.00	51.7 PK	74.0	-22.3	3.33 V	338	37.7	14.0
4	13390.00	39.0 AV	54.0	-15.0	3.33 V	338	25.0	14.0
5	20085.00	54.8 PK	74.0	-19.2	3.67 V	135	58.3	-3.5
6	20085.00	41.6 AV	54.0	-12.4	3.67 V	135	45.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.9 PK			2.22 H	132	113.7	7.2
2	*6855.00	113.1 AV			2.22 H	132	105.9	7.2
3	#13710.00	50.5 PK	88.2	-37.7	3.86 H	360	35.3	15.2
4	#13710.00	38.5 AV	68.2	-29.7	3.86 H	360	23.3	15.2
5	20565.00	56.3 PK	74.0	-17.7	3.89 H	285	59.6	-3.3
6	20565.00	44.4 AV	54.0	-9.6	3.89 H	285	47.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.6 PK			1.64 V	207	115.4	7.2
2	*6855.00	113.7 AV			1.64 V	207	106.5	7.2
3	#13710.00	51.2 PK	88.2	-37.0	3.26 V	335	36.0	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.26 V	335	23.4	15.2
5	20565.00	55.2 PK	74.0	-18.8	3.64 V	124	58.5	-3.3
6	20565.00	42.0 AV	54.0	-12.0	3.64 V	124	45.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.4 PK	88.2	-15.8	2.23 H	131	68.1	4.3
2	#5925.00	56.9 AV	68.2	-11.3	2.23 H	131	52.6	4.3
3	*5955.00	120.6 PK			2.23 H	131	116.1	4.5
4	*5955.00	111.4 AV			2.23 H	131	106.9	4.5
5	11910.00	51.2 PK	74.0	-22.8	3.85 H	360	39.0	12.2
6	11910.00	38.9 AV	54.0	-15.1	3.85 H	360	26.7	12.2
7	17865.00	56.7 PK	74.0	-17.3	3.85 H	276	34.8	21.9
8	17865.00	44.9 AV	54.0	-9.1	3.85 H	276	23.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.0 PK	88.2	-13.2	1.63 V	201	70.7	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.63 V	201	53.1	4.3
3	*5955.00	121.9 PK			1.63 V	201	117.4	4.5
4	*5955.00	112.0 AV			1.63 V	201	107.5	4.5
5	11910.00	51.1 PK	74.0	-22.9	3.25 V	330	38.9	12.2
6	11910.00	38.4 AV	54.0	-15.6	3.25 V	330	26.2	12.2
7	17865.00	54.7 PK	74.0	-19.3	3.58 V	120	32.8	21.9
8	17865.00	41.8 AV	54.0	-12.2	3.58 V	120	19.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.5 PK			2.24 H	133	115.7	4.8
2	*6195.00	111.3 AV			2.24 H	133	106.5	4.8
3	12390.00	50.9 PK	74.0	-23.1	3.91 H	360	38.6	12.3
4	12390.00	38.8 AV	54.0	-15.2	3.91 H	360	26.5	12.3
5	18585.00	57.0 PK	74.0	-17.0	3.85 H	263	62.0	-5.0
6	18585.00	45.4 AV	54.0	-8.6	3.85 H	263	50.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.4 PK			1.60 V	204	116.6	4.8
2	*6195.00	111.7 AV			1.60 V	204	106.9	4.8
3	12390.00	51.2 PK	74.0	-22.8	3.30 V	323	38.9	12.3
4	12390.00	38.6 AV	54.0	-15.4	3.30 V	323	26.3	12.3
5	18585.00	54.7 PK	74.0	-19.3	3.62 V	129	59.7	-5.0
6	18585.00	41.8 AV	54.0	-12.2	3.62 V	129	46.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			2.29 H	147	113.9	6.4
2	*6415.00	111.3 AV			2.29 H	147	104.9	6.4
3	#12830.00	51.8 PK	88.2	-36.4	3.84 H	360	38.8	13.0
4	#12830.00	39.2 AV	68.2	-29.0	3.84 H	360	26.2	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.83 H	263	60.4	-3.8
6	19245.00	44.6 AV	54.0	-9.4	3.83 H	263	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.3 PK			1.62 V	208	115.9	6.4
2	*6415.00	112.4 AV			1.62 V	208	106.0	6.4
3	#12830.00	51.3 PK	88.2	-36.9	3.19 V	335	38.3	13.0
4	#12830.00	38.3 AV	68.2	-29.9	3.19 V	335	25.3	13.0
5	19245.00	54.7 PK	74.0	-19.3	3.57 V	130	58.5	-3.8
6	19245.00	41.6 AV	54.0	-12.4	3.57 V	130	45.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.0 PK			2.24 H	135	114.1	6.9
2	*6535.00	111.8 AV			2.24 H	135	104.9	6.9
3	#13070.00	51.0 PK	88.2	-37.2	3.80 H	360	37.8	13.2
4	#13070.00	38.9 AV	68.2	-29.3	3.80 H	360	25.7	13.2
5	19605.00	57.0 PK	74.0	-17.0	3.89 H	266	61.0	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.89 H	266	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.3 PK			1.58 V	206	115.4	6.9
2	*6535.00	112.2 AV			1.58 V	206	105.3	6.9
3	#13070.00	50.7 PK	88.2	-37.5	3.28 V	335	37.5	13.2
4	#13070.00	38.1 AV	68.2	-30.1	3.28 V	335	24.9	13.2
5	19605.00	54.8 PK	74.0	-19.2	3.53 V	108	58.8	-4.0
6	19605.00	42.0 AV	54.0	-12.0	3.53 V	108	46.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			2.27 H	120	112.6	7.2
2	*6695.00	110.9 AV			2.27 H	120	103.7	7.2
3	13390.00	51.1 PK	74.0	-22.9	3.87 H	360	37.1	14.0
4	13390.00	38.5 AV	54.0	-15.5	3.87 H	360	24.5	14.0
5	20085.00	56.5 PK	74.0	-17.5	3.80 H	282	60.0	-3.5
6	20085.00	44.9 AV	54.0	-9.1	3.80 H	282	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.7 PK			1.62 V	197	114.5	7.2
2	*6695.00	111.9 AV			1.62 V	197	104.7	7.2
3	13390.00	50.9 PK	74.0	-23.1	3.26 V	340	36.9	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.26 V	340	24.0	14.0
5	20085.00	54.4 PK	74.0	-19.6	3.61 V	126	57.9	-3.5
6	20085.00	41.4 AV	54.0	-12.6	3.61 V	126	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.7 PK			2.26 H	135	113.5	7.2
2	*6855.00	111.6 AV			2.26 H	135	104.4	7.2
3	#13710.00	51.5 PK	88.2	-36.7	3.89 H	360	36.3	15.2
4	#13710.00	39.2 AV	68.2	-29.0	3.89 H	360	24.0	15.2
5	20565.00	56.0 PK	74.0	-18.0	3.82 H	289	59.3	-3.3
6	20565.00	44.5 AV	54.0	-9.5	3.82 H	289	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.3 PK			1.57 V	205	115.1	7.2
2	*6855.00	112.2 AV			1.57 V	205	105.0	7.2
3	#13710.00	50.8 PK	88.2	-37.4	3.23 V	330	35.6	15.2
4	#13710.00	38.2 AV	68.2	-30.0	3.23 V	330	23.0	15.2
5	20565.00	54.2 PK	74.0	-19.8	3.54 V	116	57.5	-3.3
6	20565.00	41.4 AV	54.0	-12.6	3.54 V	116	44.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	2.25 H	124	69.4	4.3
2	#5925.00	55.9 AV	68.2	-12.3	2.25 H	124	51.6	4.3
3	*5955.00	119.3 PK			2.25 H	124	114.8	4.5
4	*5955.00	108.3 AV			2.25 H	124	103.8	4.5
5	11910.00	51.7 PK	74.0	-22.3	3.91 H	360	39.5	12.2
6	11910.00	39.1 AV	54.0	-14.9	3.91 H	360	26.9	12.2
7	17865.00	56.5 PK	74.0	-17.5	3.80 H	302	34.6	21.9
8	17865.00	44.9 AV	54.0	-9.1	3.80 H	302	23.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	1.47 V	198	70.4	4.3
2	#5925.00	57.5 AV	68.2	-10.7	1.47 V	198	53.2	4.3
3	*5955.00	119.9 PK			1.47 V	198	115.4	4.5
4	*5955.00	109.8 AV			1.47 V	198	105.3	4.5
5	11910.00	50.8 PK	74.0	-23.2	3.23 V	343	38.6	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.23 V	343	26.1	12.2
7	17865.00	54.0 PK	74.0	-20.0	3.53 V	130	32.1	21.9
8	17865.00	41.3 AV	54.0	-12.7	3.53 V	130	19.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			2.27 H	130	114.7	4.8
2	*6195.00	108.7 AV			2.27 H	130	103.9	4.8
3	12390.00	51.9 PK	74.0	-22.1	3.93 H	357	39.6	12.3
4	12390.00	39.5 AV	54.0	-14.5	3.93 H	357	27.2	12.3
5	18585.00	56.7 PK	74.0	-17.3	3.82 H	300	61.7	-5.0
6	18585.00	45.1 AV	54.0	-8.9	3.82 H	300	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			1.48 V	199	115.1	4.8
2	*6195.00	109.7 AV			1.48 V	199	104.9	4.8
3	12390.00	50.7 PK	74.0	-23.3	3.28 V	346	38.4	12.3
4	12390.00	38.0 AV	54.0	-16.0	3.28 V	346	25.7	12.3
5	18585.00	53.4 PK	74.0	-20.6	3.53 V	127	58.4	-5.0
6	18585.00	41.0 AV	54.0	-13.0	3.53 V	127	46.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.5 PK			2.24 H	129	113.1	6.4
2	*6415.00	108.4 AV			2.24 H	129	102.0	6.4
3	#12830.00	51.6 PK	88.2	-36.6	3.88 H	360	38.6	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.88 H	360	25.8	13.0
5	19245.00	56.1 PK	74.0	-17.9	3.79 H	314	59.9	-3.8
6	19245.00	44.4 AV	54.0	-9.6	3.79 H	314	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.9 PK			1.51 V	213	113.5	6.4
2	*6415.00	109.9 AV			1.51 V	213	103.5	6.4
3	#12830.00	51.3 PK	88.2	-36.9	3.25 V	334	38.3	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.25 V	334	25.8	13.0
5	19245.00	53.6 PK	74.0	-20.4	3.52 V	114	57.4	-3.8
6	19245.00	40.9 AV	54.0	-13.1	3.52 V	114	44.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.0 PK			2.29 H	118	112.1	6.9
2	*6535.00	108.2 AV			2.29 H	118	101.3	6.9
3	#13070.00	51.5 PK	88.2	-36.7	3.93 H	359	38.3	13.2
4	#13070.00	39.2 AV	68.2	-29.0	3.93 H	359	26.0	13.2
5	19605.00	56.9 PK	74.0	-17.1	3.81 H	297	60.9	-4.0
6	19605.00	45.1 AV	54.0	-8.9	3.81 H	297	49.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.5 PK			1.52 V	182	112.6	6.9
2	*6535.00	109.6 AV			1.52 V	182	102.7	6.9
3	#13070.00	50.6 PK	88.2	-37.6	3.18 V	330	37.4	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.18 V	330	24.7	13.2
5	19605.00	54.0 PK	74.0	-20.0	3.48 V	123	58.0	-4.0
6	19605.00	41.6 AV	54.0	-12.4	3.48 V	123	45.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.9 PK			2.26 H	108	111.7	7.2
2	*6695.00	107.9 AV			2.26 H	108	100.7	7.2
3	13390.00	51.7 PK	74.0	-22.3	3.88 H	357	37.7	14.0
4	13390.00	39.0 AV	54.0	-15.0	3.88 H	357	25.0	14.0
5	20085.00	56.1 PK	74.0	-17.9	3.78 H	299	59.6	-3.5
6	20085.00	44.6 AV	54.0	-9.4	3.78 H	299	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			1.50 V	200	112.6	7.2
2	*6695.00	109.8 AV			1.50 V	200	102.6	7.2
3	13390.00	50.8 PK	74.0	-23.2	3.17 V	328	36.8	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.17 V	328	24.0	14.0
5	20085.00	54.2 PK	74.0	-19.8	3.51 V	138	57.7	-3.5
6	20085.00	41.5 AV	54.0	-12.5	3.51 V	138	45.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.1 PK			2.20 H	109	111.9	7.2
2	*6855.00	108.1 AV			2.20 H	109	100.9	7.2
3	#13710.00	52.1 PK	88.2	-36.1	3.90 H	360	36.9	15.2
4	#13710.00	39.5 AV	68.2	-28.7	3.90 H	360	24.3	15.2
5	20565.00	56.5 PK	74.0	-17.5	3.85 H	290	59.8	-3.3
6	20565.00	45.1 AV	54.0	-8.9	3.85 H	290	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.2 PK			1.41 V	208	113.0	7.2
2	*6855.00	110.0 AV			1.41 V	208	102.8	7.2
3	#13710.00	50.9 PK	88.2	-37.3	3.23 V	334	35.7	15.2
4	#13710.00	38.3 AV	68.2	-29.9	3.23 V	334	23.1	15.2
5	20565.00	54.1 PK	74.0	-19.9	3.49 V	144	57.4	-3.3
6	20565.00	41.1 AV	54.0	-12.9	3.49 V	144	44.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.00 H	0	70.8	4.3
2	#5925.00	50.8 AV	68.2	-17.4	1.00 H	0	46.5	4.3
3	*5955.00	119.8 PK			2.33 H	132	115.3	4.5
4	*5955.00	109.6 AV			2.33 H	132	105.1	4.5
5	11910.00	50.9 PK	74.0	-23.1	3.85 H	360	38.7	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.85 H	360	26.3	12.2
7	17865.00	55.4 PK	74.0	-18.6	3.80 H	297	33.5	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.80 H	297	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.00 V	0	71.5	4.3
2	#5925.00	53.2 AV	68.2	-15.0	1.00 V	0	48.9	4.3
3	*5955.00	120.8 PK			1.39 V	157	116.3	4.5
4	*5955.00	111.0 AV			1.39 V	157	106.5	4.5
5	11910.00	50.7 PK	74.0	-23.3	3.18 V	342	38.5	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.18 V	342	26.1	12.2
7	17865.00	54.0 PK	74.0	-20.0	3.45 V	152	32.1	21.9
8	17865.00	41.0 AV	54.0	-13.0	3.45 V	152	19.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.2 PK			2.32 H	125	113.0	7.2
2	*6695.00	109.9 AV			2.32 H	125	102.7	7.2
3	13390.00	51.0 PK	74.0	-23.0	3.81 H	360	37.0	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.81 H	360	24.6	14.0
5	20085.00	54.8 PK	74.0	-19.2	3.84 H	302	58.3	-3.5
6	20085.00	43.8 AV	54.0	-10.2	3.84 H	302	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.2 PK			1.44 V	157	113.0	7.2
2	*6695.00	110.6 AV			1.44 V	157	103.4	7.2
3	13390.00	50.8 PK	74.0	-23.2	3.22 V	349	36.8	14.0
4	13390.00	38.4 AV	54.0	-15.6	3.22 V	349	24.4	14.0
5	20085.00	54.0 PK	74.0	-20.0	3.48 V	167	57.5	-3.5
6	20085.00	40.7 AV	54.0	-13.3	3.48 V	167	44.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.0 PK	88.2	-15.2	1.00 H	0	68.7	4.3
2	#5925.00	54.4 AV	68.2	-13.8	1.00 H	0	50.1	4.3
3	*5955.00	117.0 PK			2.22 H	132	112.5	4.5
4	*5955.00	107.1 AV			2.22 H	132	102.6	4.5
5	11910.00	51.5 PK	74.0	-22.5	3.85 H	356	39.3	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.85 H	356	26.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.79 H	309	34.4	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.79 H	309	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	1.00 V	0	69.3	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.00 V	0	53.6	4.3
3	*5955.00	119.3 PK			1.47 V	199	114.8	4.5
4	*5955.00	108.7 AV			1.47 V	199	104.2	4.5
5	11910.00	50.9 PK	74.0	-23.1	3.28 V	328	38.7	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.28 V	328	26.3	12.2
7	17865.00	54.3 PK	74.0	-19.7	3.55 V	131	32.4	21.9
8	17865.00	41.4 AV	54.0	-12.6	3.55 V	131	19.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.0 PK			2.20 H	137	109.8	7.2
2	*6695.00	107.0 AV			2.20 H	137	99.8	7.2
3	13390.00	51.5 PK	74.0	-22.5	3.87 H	360	37.5	14.0
4	13390.00	38.5 AV	54.0	-15.5	3.87 H	360	24.5	14.0
5	20085.00	56.8 PK	74.0	-17.2	3.82 H	325	60.3	-3.5
6	20085.00	45.3 AV	54.0	-8.7	3.82 H	325	48.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.4 PK			1.41 V	194	112.2	7.2
2	*6695.00	108.7 AV			1.41 V	194	101.5	7.2
3	13390.00	50.9 PK	74.0	-23.1	3.33 V	344	36.9	14.0
4	13390.00	38.7 AV	54.0	-15.3	3.33 V	344	24.7	14.0
5	20085.00	54.0 PK	74.0	-20.0	3.59 V	121	57.5	-3.5
6	20085.00	41.4 AV	54.0	-12.6	3.59 V	121	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	1.00 H	0	73.3	4.3
2	#5925.00	63.8 AV	68.2	-4.4	1.00 H	0	59.5	4.3
3	*5985.00	108.5 PK			2.19 H	134	104.1	4.4
4	*5985.00	97.4 AV			2.19 H	134	93.0	4.4
5	11970.00	51.3 PK	74.0	-22.7	3.87 H	357	39.1	12.2
6	11970.00	38.7 AV	54.0	-15.3	3.87 H	357	26.5	12.2
7	17955.00	56.1 PK	74.0	-17.9	3.79 H	301	32.7	23.4
8	17955.00	44.6 AV	54.0	-9.4	3.79 H	301	21.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.9 PK	88.2	-9.3	1.00 V	0	74.6	4.3
2	#5925.00	64.6 AV	68.2	-3.6	1.00 V	0	60.3	4.3
3	*5985.00	110.9 PK			2.08 V	227	106.5	4.4
4	*5985.00	99.0 AV			2.08 V	227	94.6	4.4
5	11970.00	50.6 PK	74.0	-23.4	3.25 V	346	38.4	12.2
6	11970.00	38.2 AV	54.0	-15.8	3.25 V	346	26.0	12.2
7	17955.00	54.4 PK	74.0	-19.6	3.45 V	149	31.0	23.4
8	17955.00	41.1 AV	54.0	-12.9	3.45 V	149	17.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.1 PK			2.17 H	127	101.9	7.2
2	*6705.00	97.9 AV			2.17 H	127	90.7	7.2
3	#13410.00	51.2 PK	88.2	-37.0	3.88 H	354	37.0	14.2
4	#13410.00	38.4 AV	68.2	-29.8	3.88 H	354	24.2	14.2
5	20115.00	55.7 PK	74.0	-18.3	3.74 H	295	59.2	-3.5
6	20115.00	44.2 AV	54.0	-9.8	3.74 H	295	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	111.1 PK			2.10 V	241	103.9	7.2
2	*6705.00	99.2 AV			2.10 V	241	92.0	7.2
3	#13410.00	50.7 PK	88.2	-37.5	3.30 V	339	36.5	14.2
4	#13410.00	38.3 AV	68.2	-29.9	3.30 V	339	24.1	14.2
5	20115.00	54.3 PK	74.0	-19.7	3.47 V	135	57.8	-3.5
6	20115.00	41.0 AV	54.0	-13.0	3.47 V	135	44.5	-3.5

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	2.19 H	133	69.4	4.3
2	#5925.00	59.4 AV	68.2	-8.8	2.19 H	133	55.1	4.3
3	*6025.00	106.2 PK			2.19 H	133	102.0	4.2
4	*6025.00	93.0 AV			2.19 H	133	88.8	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.87 H	347	39.1	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.87 H	347	26.4	12.4
7	18075.00	56.5 PK	74.0	-17.5	3.82 H	286	61.2	-4.7
8	18075.00	44.8 AV	54.0	-9.2	3.82 H	286	49.5	-4.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.6 PK	88.2	-13.6	1.00 V	0	70.3	4.3
2	#5925.00	59.7 AV	68.2	-8.5	1.00 V	0	55.4	4.3
3	*6025.00	106.1 PK			1.38 V	196	101.9	4.2
4	*6025.00	94.8 AV			1.38 V	196	90.6	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.25 V	337	38.4	12.4
6	12050.00	38.4 AV	54.0	-15.6	3.25 V	337	26.0	12.4
7	18075.00	53.8 PK	74.0	-20.2	3.51 V	135	58.5	-4.7
8	18075.00	40.9 AV	54.0	-13.1	3.51 V	135	45.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.3 PK			2.14 H	132	99.1	7.2
2	*6665.00	92.9 AV			2.14 H	132	85.7	7.2
3	13330.00	51.4 PK	74.0	-22.6	3.93 H	351	37.6	13.8
4	13330.00	38.9 AV	54.0	-15.1	3.93 H	351	25.1	13.8
5	19995.00	56.4 PK	74.0	-17.6	3.85 H	288	60.0	-3.6
6	19995.00	44.9 AV	54.0	-9.1	3.85 H	288	48.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.0 PK			1.42 V	188	98.8	7.2
2	*6665.00	95.0 AV			1.42 V	188	87.8	7.2
3	13330.00	50.9 PK	74.0	-23.1	3.23 V	347	37.1	13.8
4	13330.00	38.8 AV	54.0	-15.2	3.23 V	347	25.0	13.8
5	19995.00	54.2 PK	74.0	-19.8	3.46 V	148	57.8	-3.6
6	19995.00	41.1 AV	54.0	-12.9	3.46 V	148	44.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	2.20 H	133	74.5	4.3
2	#5925.00	61.3 AV	68.2	-6.9	2.20 H	133	57.0	4.3
3	*6025.00	104.8 PK			2.20 H	133	100.6	4.2
4	*6025.00	93.2 AV			2.20 H	133	89.0	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.86 H	360	39.1	12.4
6	12050.00	39.0 AV	54.0	-15.0	3.86 H	360	26.6	12.4
7	18075.00	56.6 PK	74.0	-17.4	3.79 H	311	61.3	-4.7
8	18075.00	45.1 AV	54.0	-8.9	3.79 H	311	49.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.7 PK	88.2	-7.5	1.31 V	198	76.4	4.3
2	#5925.00	63.1 AV	68.2	-5.1	1.31 V	198	58.8	4.3
3	*6025.00	106.4 PK			1.31 V	198	102.2	4.2
4	*6025.00	94.6 AV			1.31 V	198	90.4	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.19 V	322	39.1	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.19 V	322	26.4	12.4
7	18075.00	54.2 PK	74.0	-19.8	3.54 V	132	58.9	-4.7
8	18075.00	41.3 AV	54.0	-12.7	3.54 V	132	46.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.0 PK			2.14 H	132	97.8	7.2
2	*6665.00	93.3 AV			2.14 H	132	86.1	7.2
3	13330.00	51.1 PK	74.0	-22.9	3.81 H	360	37.3	13.8
4	13330.00	38.5 AV	54.0	-15.5	3.81 H	360	24.7	13.8
5	19995.00	56.8 PK	74.0	-17.2	3.79 H	301	60.4	-3.6
6	19995.00	45.2 AV	54.0	-8.8	3.79 H	301	48.8	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.4 PK			1.34 V	195	99.2	7.2
2	*6665.00	94.5 AV			1.34 V	195	87.3	7.2
3	13330.00	51.1 PK	74.0	-22.9	3.14 V	329	37.3	13.8
4	13330.00	38.5 AV	54.0	-15.5	3.14 V	329	24.7	13.8
5	19995.00	53.7 PK	74.0	-20.3	3.59 V	142	57.3	-3.6
6	19995.00	41.0 AV	54.0	-13.0	3.59 V	142	44.6	-3.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


1Tx

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

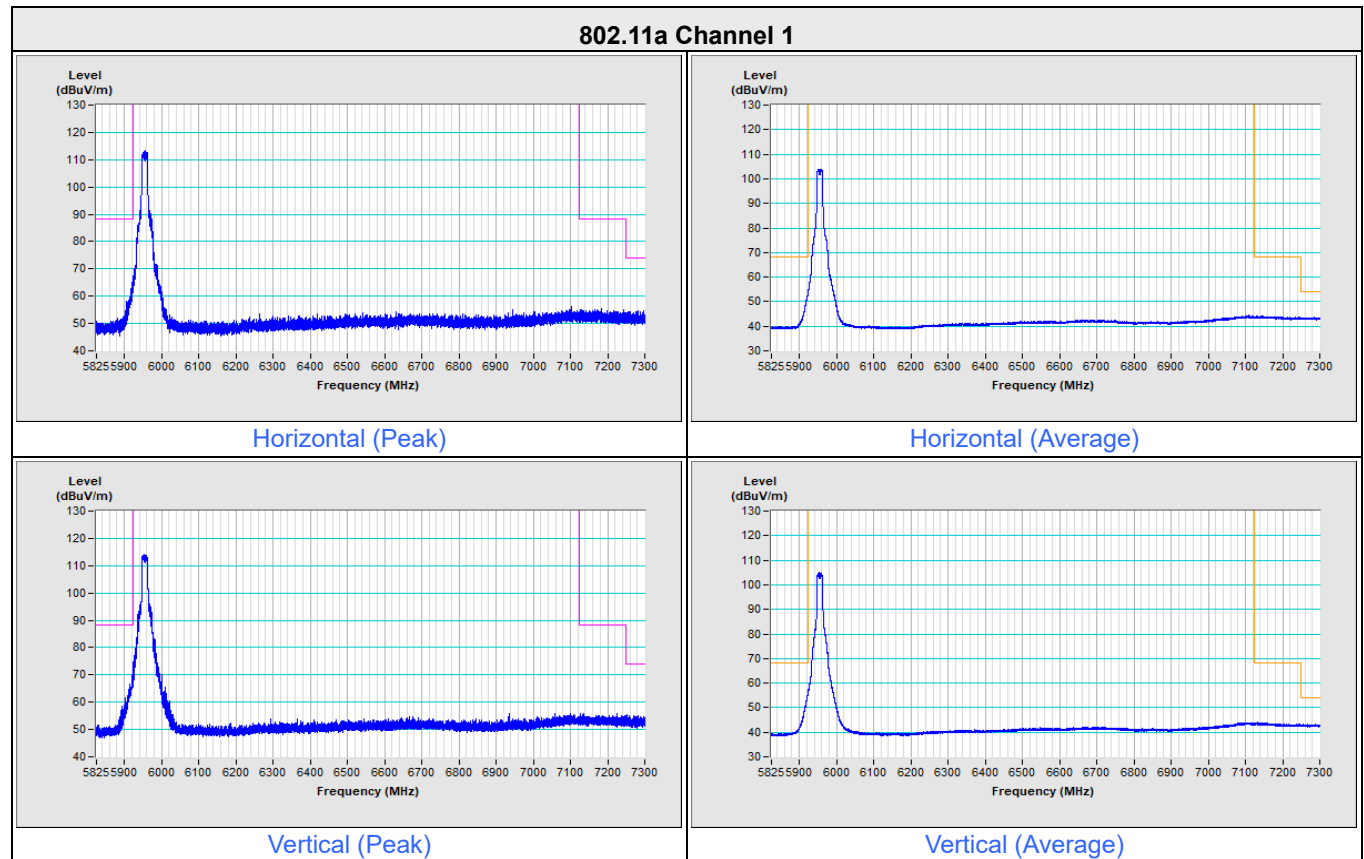


1Tx NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

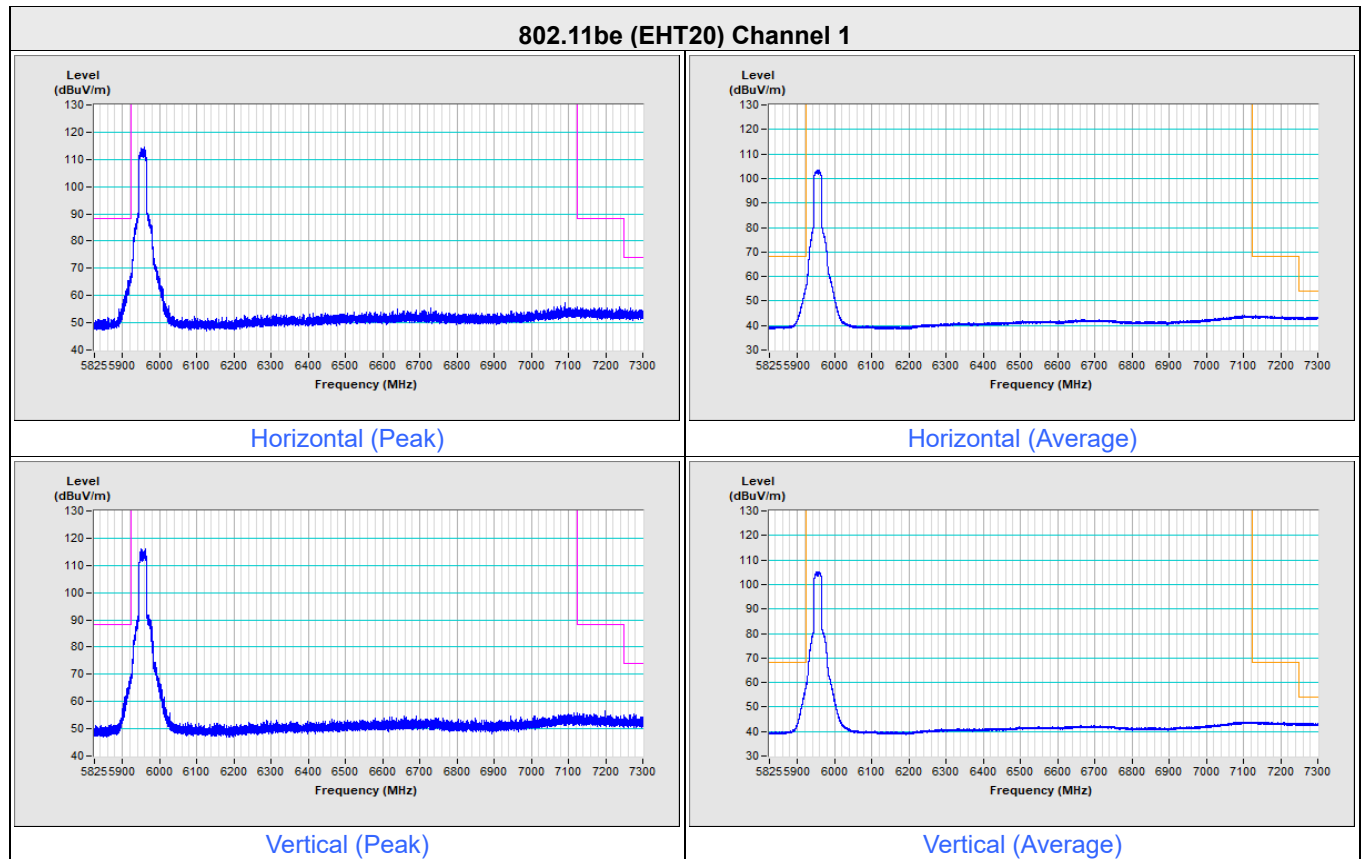


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

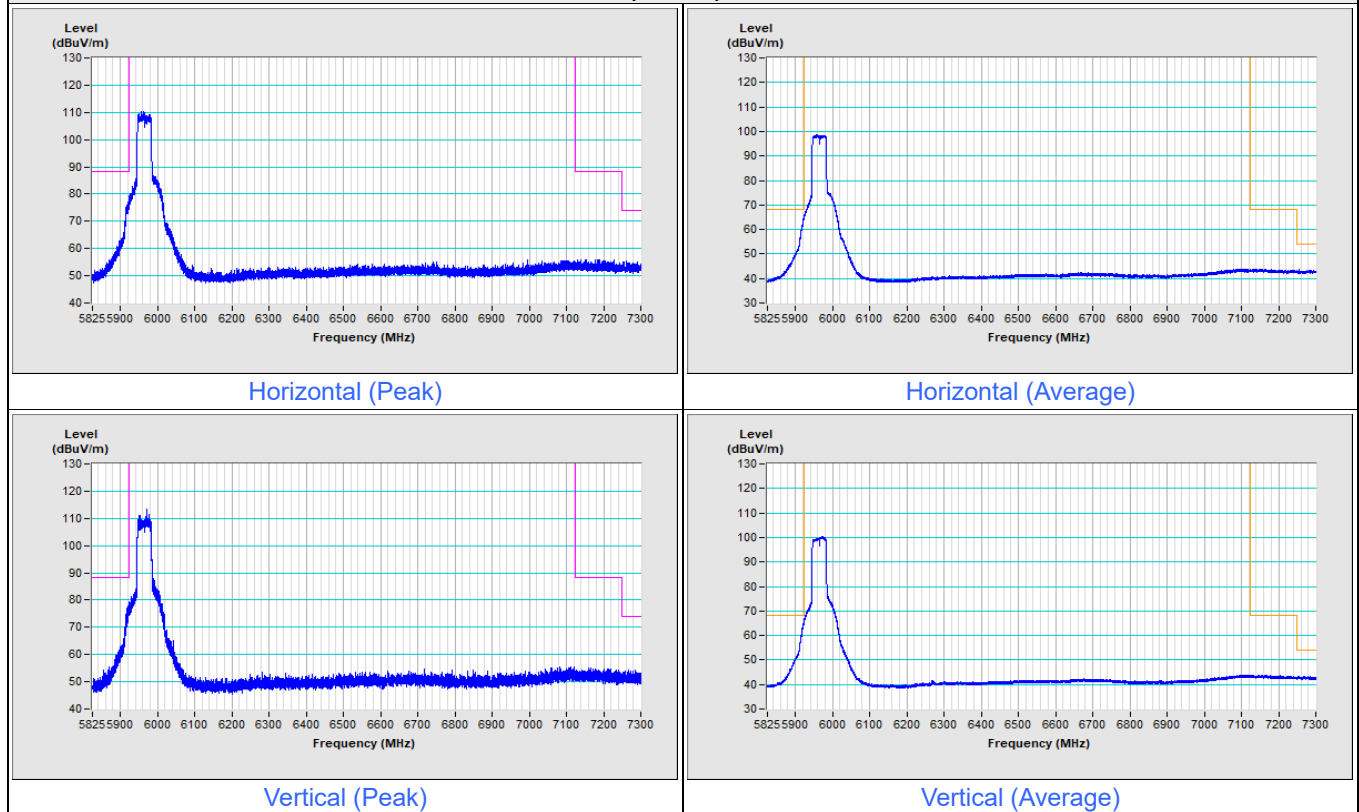


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

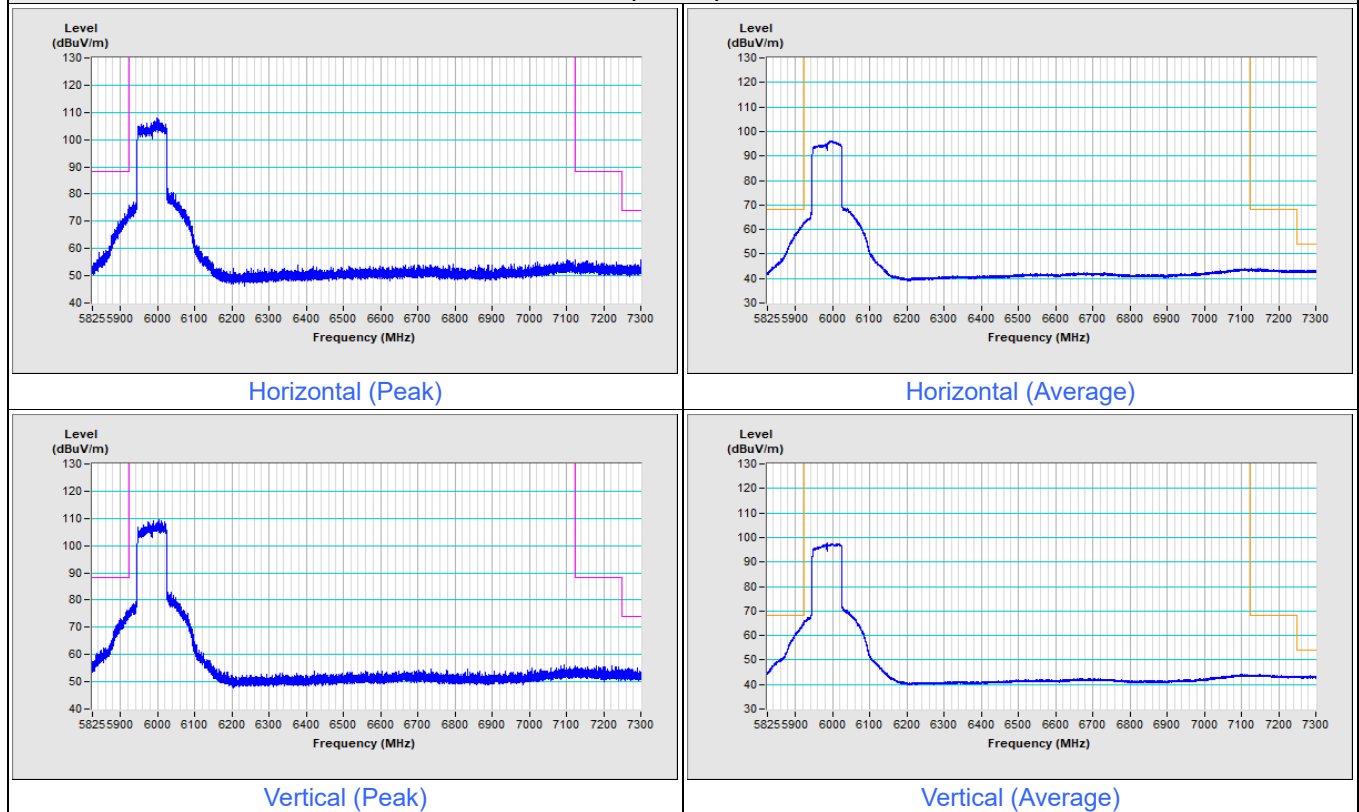


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

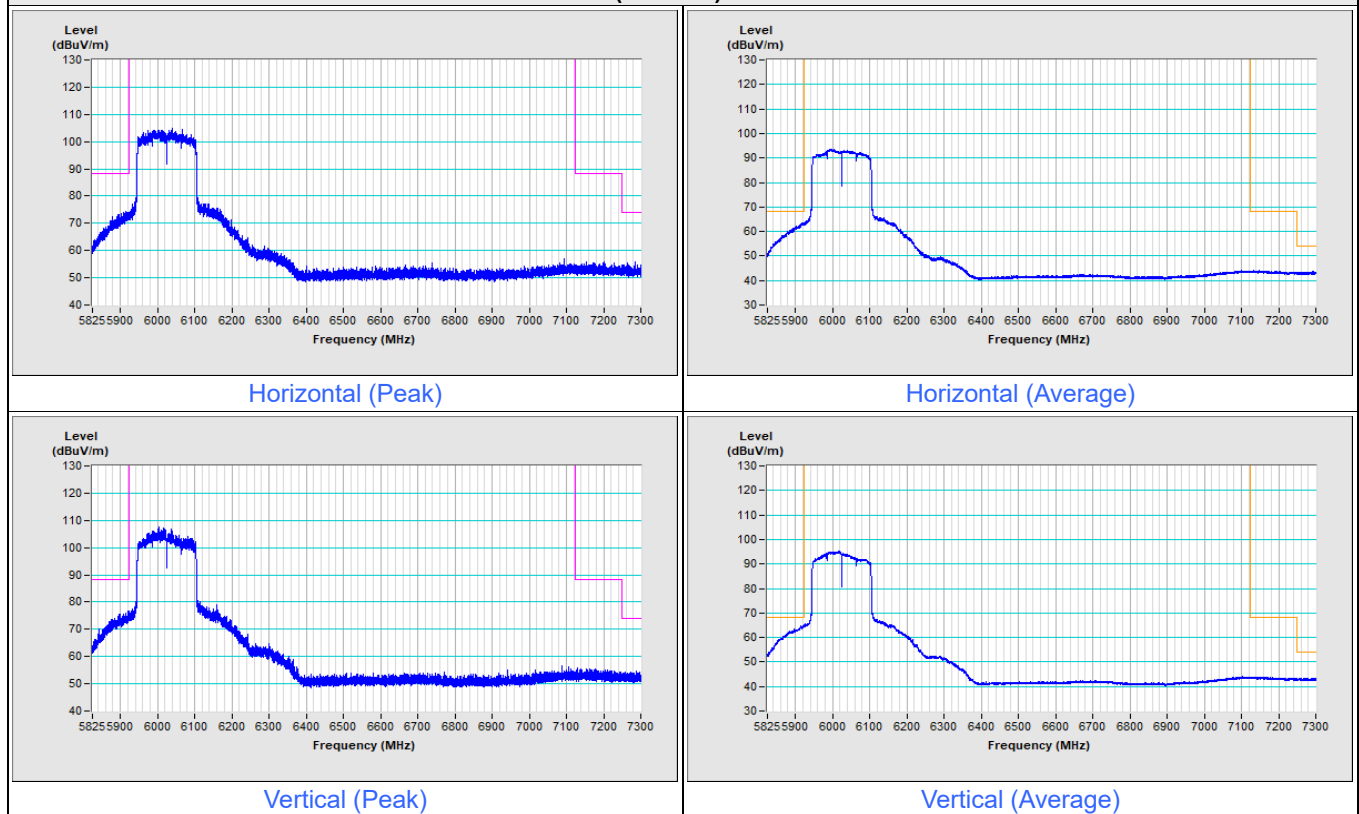


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

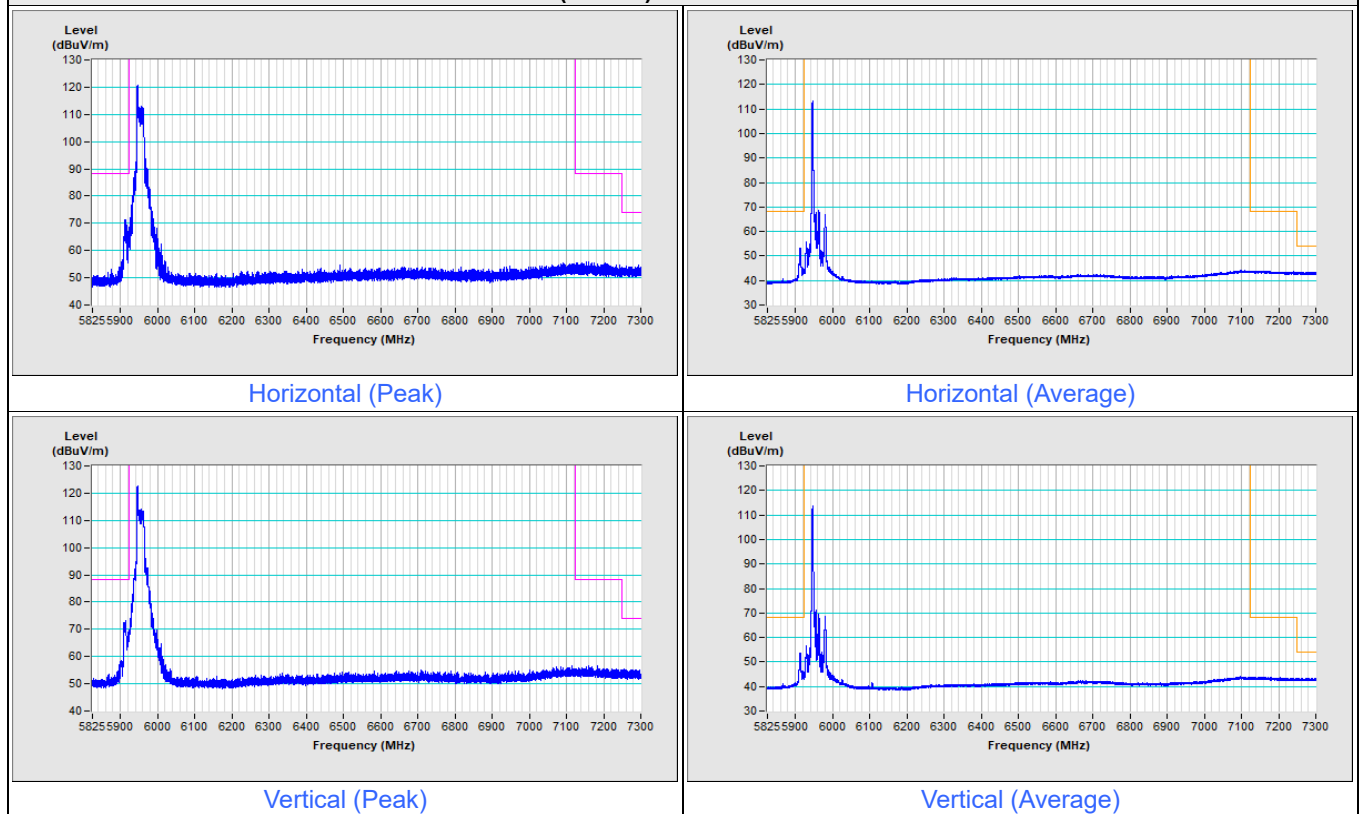


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

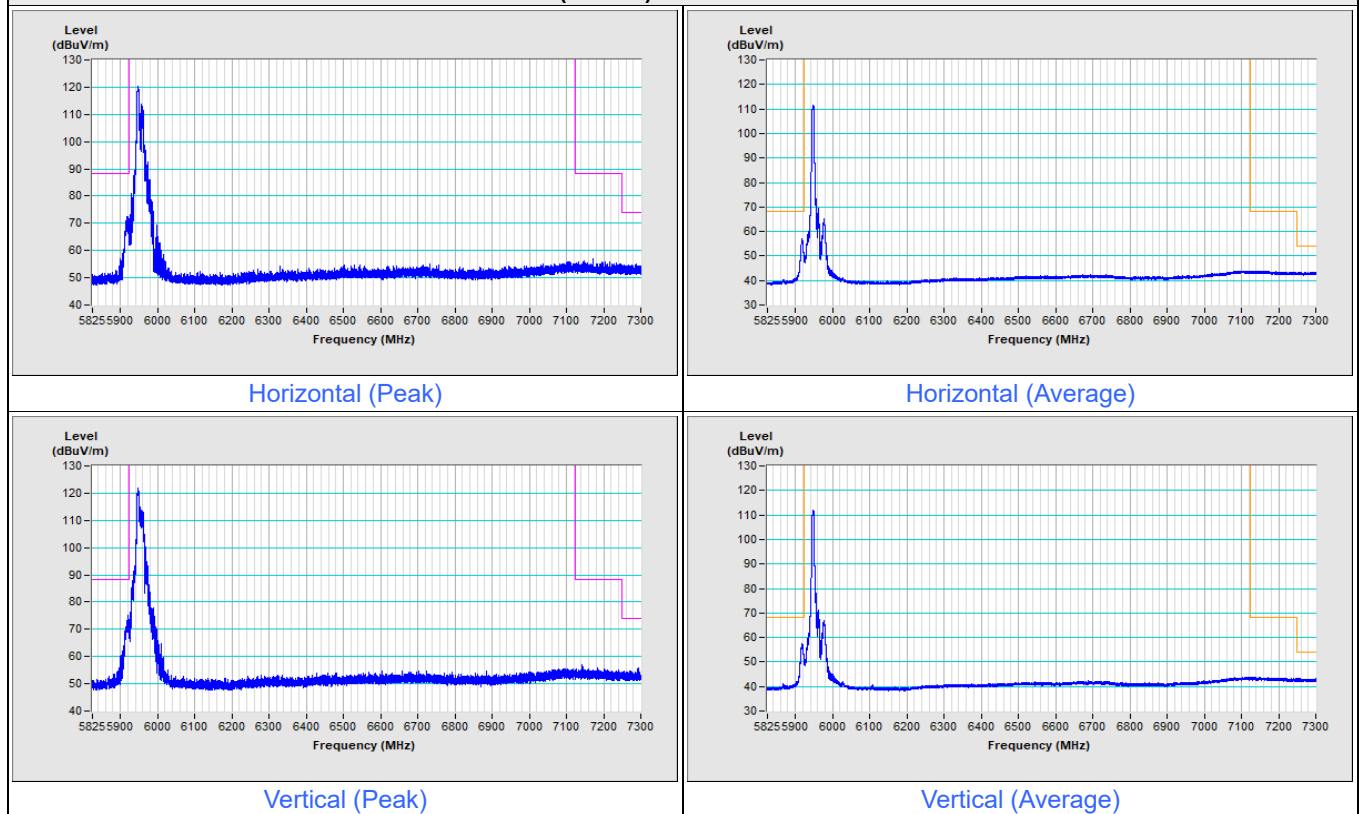


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

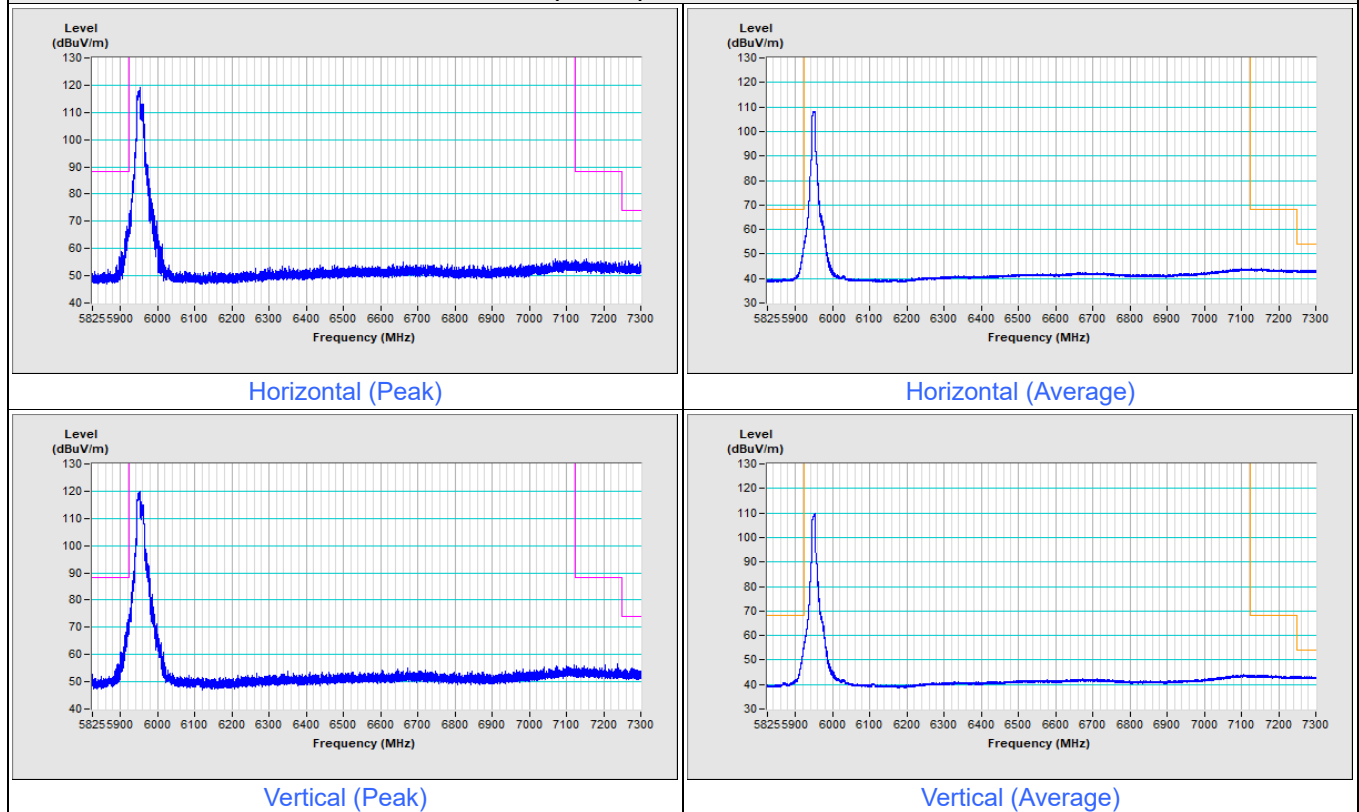


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

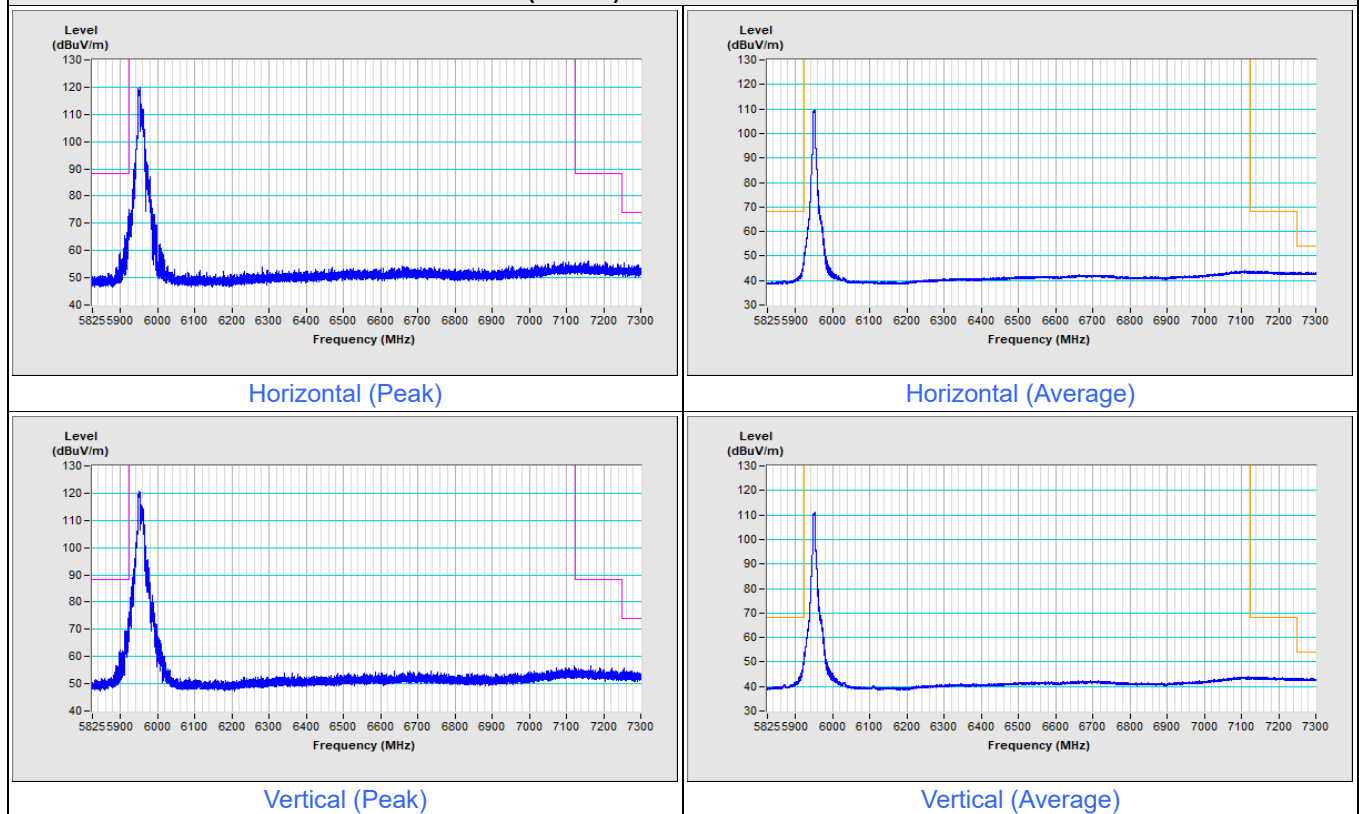


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

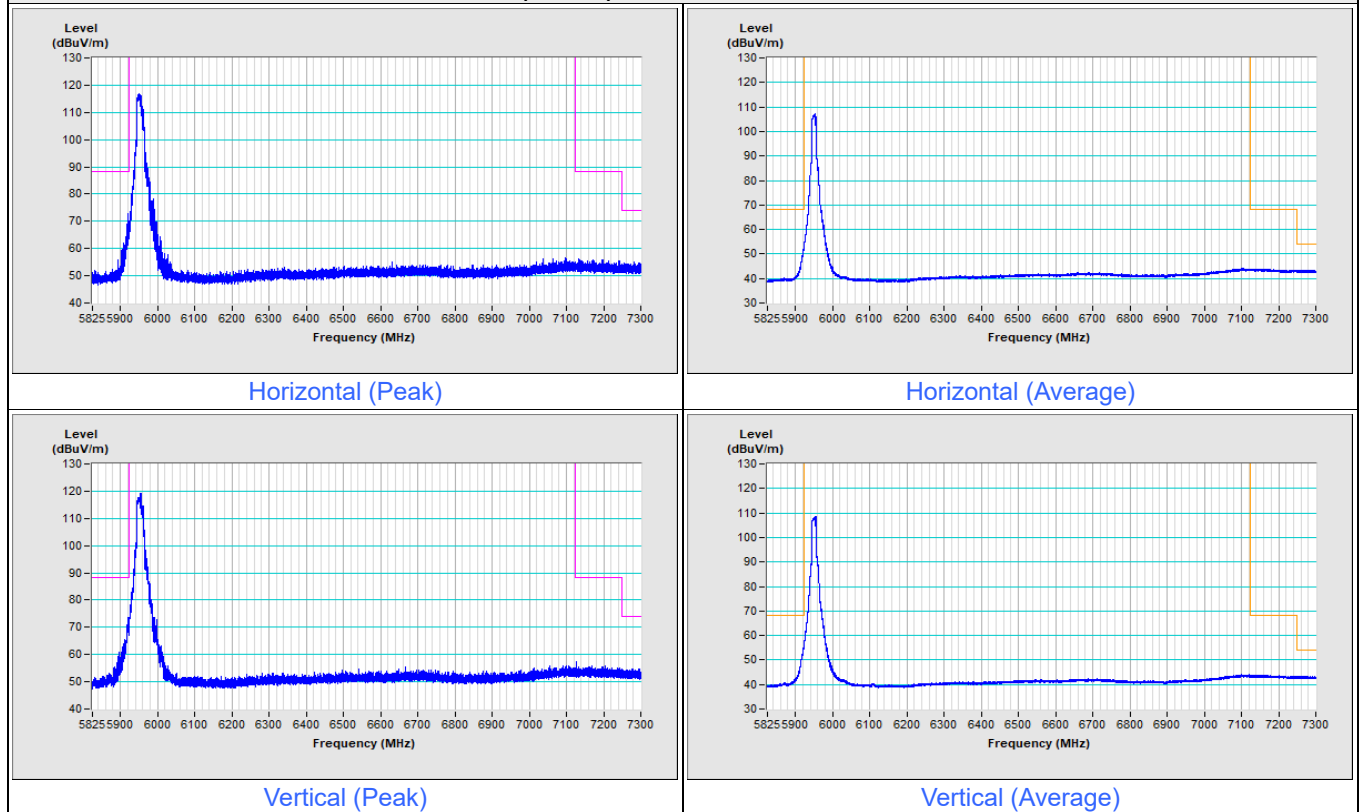


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 7

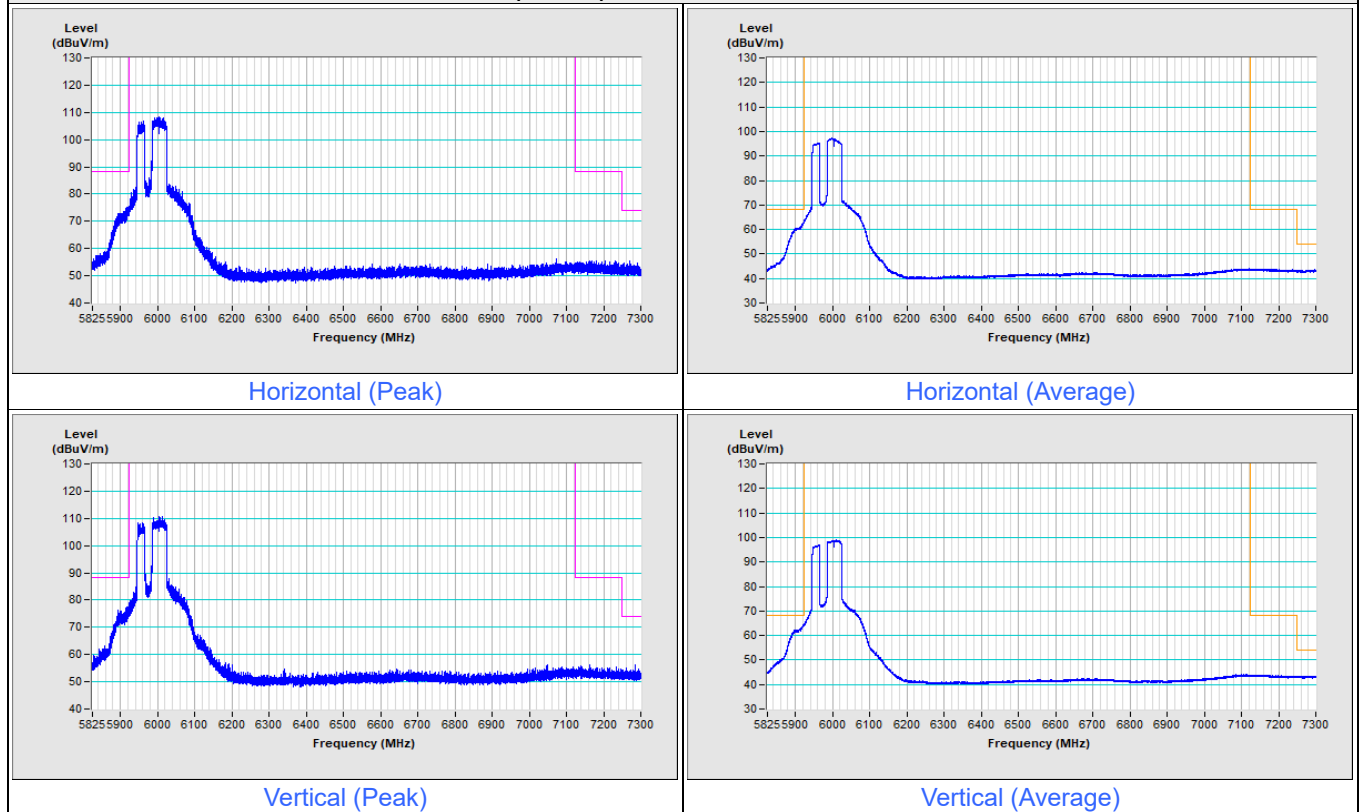


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 15

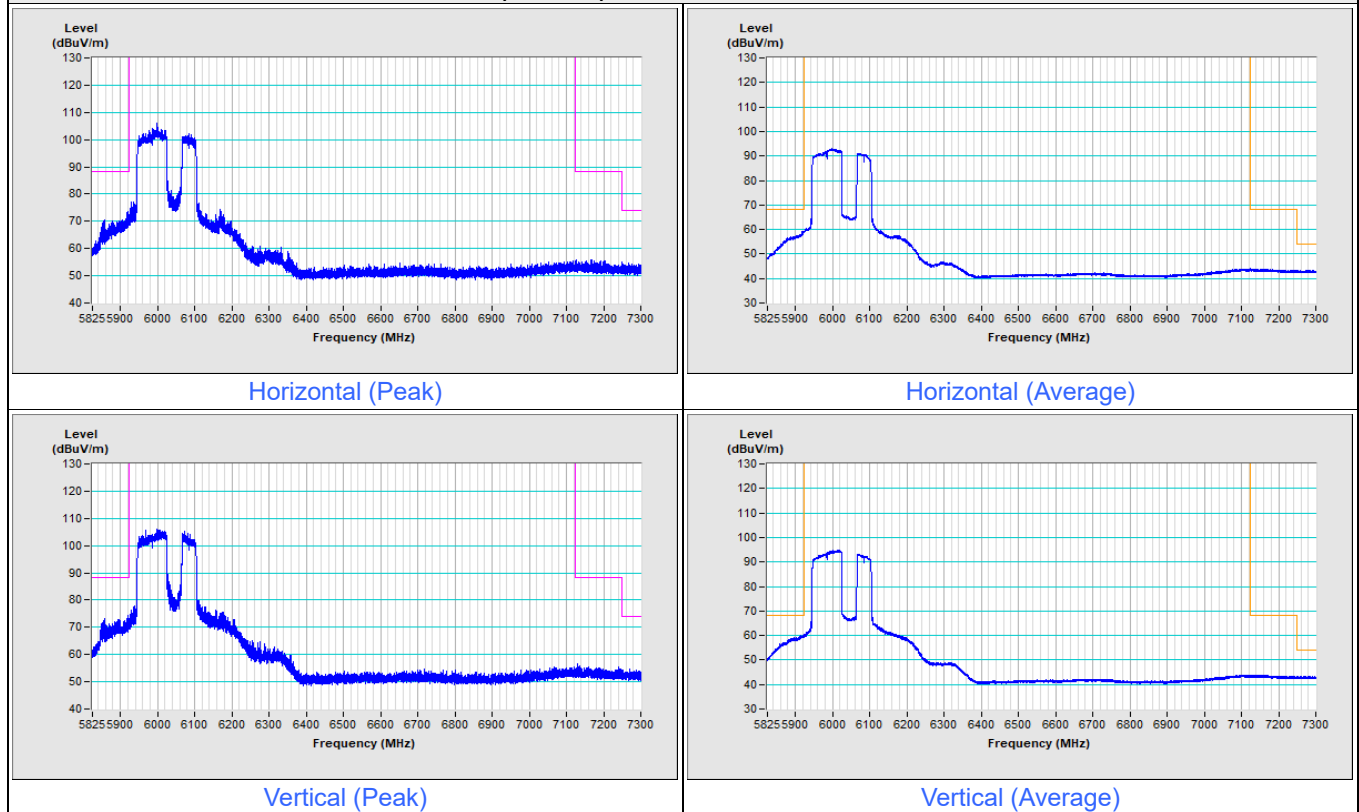

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 15

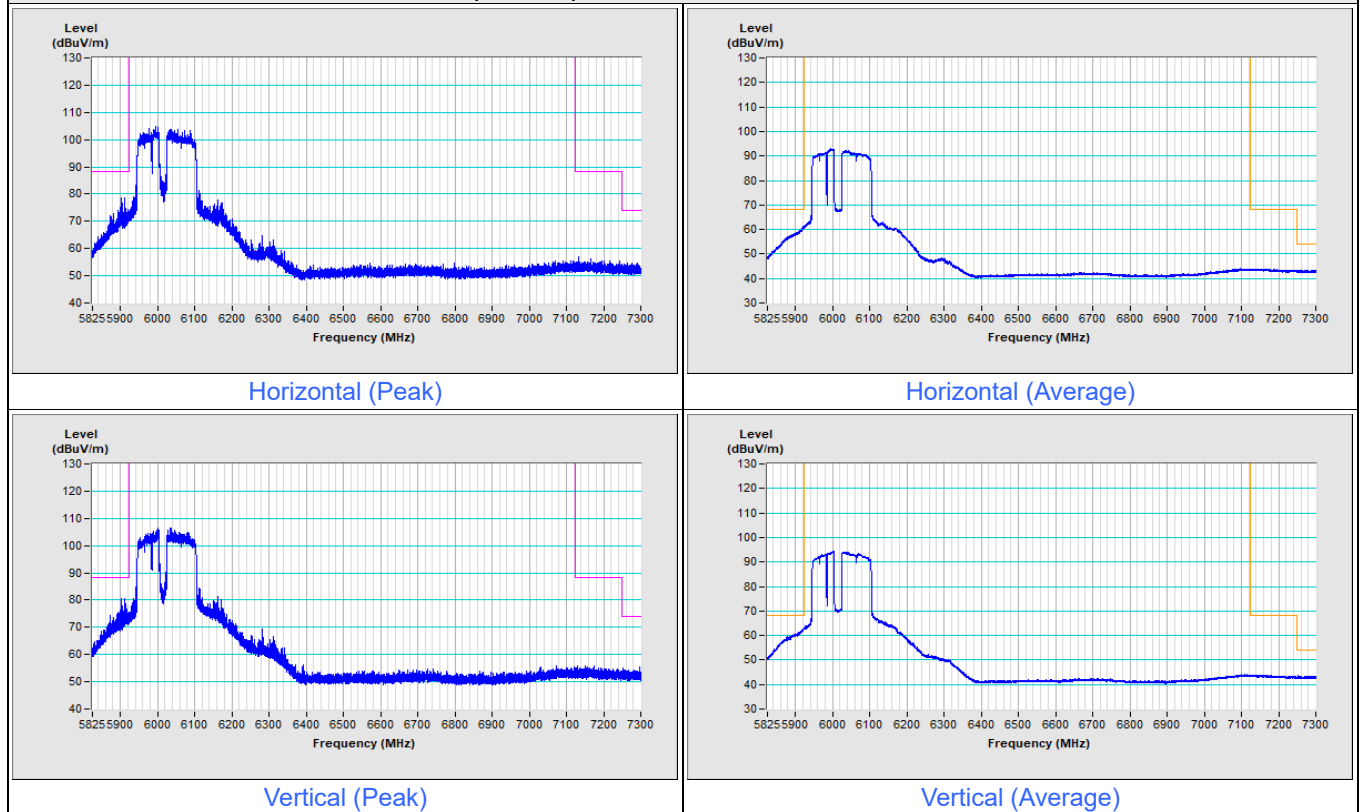

Mode A

2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	2.24 H	128	58.9	4.3
2	#5925.00	48.3 AV	68.2	-19.9	2.24 H	128	44.0	4.3
3	*5955.00	115.5 PK			2.24 H	128	111.0	4.5
4	*5955.00	106.5 AV			2.24 H	128	102.0	4.5
5	11910.00	60.1 PK	74.0	-13.9	3.91 H	347	47.9	12.2
6	11910.00	50.6 AV	54.0	-3.4	3.91 H	347	38.4	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.68 H	56	35.3	21.9
8	17865.00	45.6 AV	54.0	-8.4	3.68 H	56	23.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	1.60 V	200	63.7	4.3
2	#5925.00	52.8 AV	68.2	-15.4	1.60 V	200	48.5	4.3
3	*5955.00	116.1 PK			1.60 V	200	111.6	4.5
4	*5955.00	107.1 AV			1.60 V	200	102.6	4.5
5	11910.00	59.7 PK	74.0	-14.3	2.47 V	54	47.5	12.2
6	11910.00	49.6 AV	54.0	-4.4	2.47 V	54	37.4	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.54 V	311	35.2	21.9
8	17865.00	45.3 AV	54.0	-8.7	1.54 V	311	23.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.3 PK			2.27 H	129	110.5	4.8
2	*6195.00	106.4 AV			2.27 H	129	101.6	4.8
3	12390.00	59.7 PK	74.0	-14.3	3.94 H	353	47.4	12.3
4	12390.00	50.5 AV	54.0	-3.5	3.94 H	353	38.2	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.63 H	67	62.4	-5.0
6	18585.00	46.0 AV	54.0	-8.0	3.63 H	67	51.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.0 PK			2.09 V	148	111.2	4.8
2	*6195.00	107.0 AV			2.09 V	148	102.2	4.8
3	12390.00	59.9 PK	74.0	-14.1	2.41 V	67	47.6	12.3
4	12390.00	49.9 AV	54.0	-4.1	2.41 V	67	37.6	12.3
5	18585.00	57.4 PK	74.0	-16.6	1.55 V	313	62.4	-5.0
6	18585.00	45.8 AV	54.0	-8.2	1.55 V	313	50.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.2 PK			2.28 H	112	108.8	6.4
2	*6415.00	106.1 AV			2.28 H	112	99.7	6.4
3	#12830.00	59.6 PK	88.2	-28.6	3.94 H	347	46.6	13.0
4	#12830.00	50.2 AV	68.2	-18.0	3.94 H	347	37.2	13.0
5	19245.00	56.8 PK	74.0	-17.2	3.66 H	70	60.6	-3.8
6	19245.00	45.4 AV	54.0	-8.6	3.66 H	70	49.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.1 PK			1.63 V	193	109.7	6.4
2	*6415.00	107.2 AV			1.63 V	193	100.8	6.4
3	#12830.00	59.6 PK	88.2	-28.6	2.41 V	50	46.6	13.0
4	#12830.00	49.5 AV	68.2	-18.7	2.41 V	50	36.5	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.54 V	300	61.1	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.54 V	300	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.6 PK			2.19 H	133	108.7	6.9
2	*6535.00	106.5 AV			2.19 H	133	99.6	6.9
3	#13070.00	60.3 PK	88.2	-27.9	3.86 H	360	47.1	13.2
4	#13070.00	50.9 AV	68.2	-17.3	3.86 H	360	37.7	13.2
5	19605.00	56.9 PK	74.0	-17.1	3.70 H	68	60.9	-4.0
6	19605.00	45.5 AV	54.0	-8.5	3.70 H	68	49.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.5 PK			1.59 V	204	109.6	6.9
2	*6535.00	107.2 AV			1.59 V	204	100.3	6.9
3	#13070.00	59.6 PK	88.2	-28.6	2.44 V	67	46.4	13.2
4	#13070.00	49.2 AV	68.2	-19.0	2.44 V	67	36.0	13.2
5	19605.00	57.3 PK	74.0	-16.7	1.55 V	302	61.3	-4.0
6	19605.00	45.4 AV	54.0	-8.6	1.55 V	302	49.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.2 PK			2.25 H	113	108.0	7.2
2	*6695.00	106.4 AV			2.25 H	113	99.2	7.2
3	13390.00	59.9 PK	74.0	-14.1	3.97 H	346	45.9	14.0
4	13390.00	50.3 AV	54.0	-3.7	3.97 H	346	36.3	14.0
5	20085.00	57.1 PK	74.0	-16.9	3.64 H	45	60.6	-3.5
6	20085.00	45.6 AV	54.0	-8.4	3.64 H	45	49.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.8 PK			1.62 V	191	109.6	7.2
2	*6695.00	107.6 AV			1.62 V	191	100.4	7.2
3	13390.00	59.9 PK	74.0	-14.1	2.52 V	59	45.9	14.0
4	13390.00	49.6 AV	54.0	-4.4	2.52 V	59	35.6	14.0
5	20085.00	57.4 PK	74.0	-16.6	1.55 V	311	60.9	-3.5
6	20085.00	45.5 AV	54.0	-8.5	1.55 V	311	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.8 PK			2.28 H	124	108.6	7.2
2	*6855.00	106.6 AV			2.28 H	124	99.4	7.2
3	#13710.00	60.2 PK	88.2	-28.0	3.96 H	354	45.0	15.2
4	#13710.00	50.7 AV	68.2	-17.5	3.96 H	354	35.5	15.2
5	20565.00	57.0 PK	74.0	-17.0	3.66 H	50	60.3	-3.3
6	20565.00	45.5 AV	54.0	-8.5	3.66 H	50	48.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.9 PK			1.57 V	212	108.7	7.2
2	*6855.00	106.9 AV			1.57 V	212	99.7	7.2
3	#13710.00	60.3 PK	88.2	-27.9	2.41 V	58	45.1	15.2
4	#13710.00	49.9 AV	68.2	-18.3	2.41 V	58	34.7	15.2
5	20565.00	57.3 PK	74.0	-16.7	1.54 V	301	60.6	-3.3
6	20565.00	45.7 AV	54.0	-8.3	1.54 V	301	49.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.4 PK	88.2	-20.8	2.25 H	128	63.1	4.3
2	#5925.00	57.4 AV	68.2	-10.8	2.25 H	128	53.1	4.3
3	*5955.00	116.5 PK			2.25 H	128	112.0	4.5
4	*5955.00	105.6 AV			2.25 H	128	101.1	4.5
5	11910.00	59.8 PK	74.0	-14.2	3.85 H	355	47.6	12.2
6	11910.00	50.4 AV	54.0	-3.6	3.85 H	355	38.2	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.69 H	51	35.4	21.9
8	17865.00	45.7 AV	54.0	-8.3	3.69 H	51	23.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.0 PK	88.2	-12.2	1.60 V	201	71.7	4.3
2	#5925.00	61.2 AV	68.2	-7.0	1.60 V	201	56.9	4.3
3	*5955.00	117.2 PK			1.60 V	201	112.7	4.5
4	*5955.00	106.2 AV			1.60 V	201	101.7	4.5
5	11910.00	59.7 PK	74.0	-14.3	2.42 V	39	47.5	12.2
6	11910.00	49.5 AV	54.0	-4.5	2.42 V	39	37.3	12.2
7	17865.00	57.7 PK	74.0	-16.3	1.55 V	322	35.8	21.9
8	17865.00	45.6 AV	54.0	-8.4	1.55 V	322	23.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.9 PK			2.25 H	120	111.1	4.8
2	*6195.00	105.2 AV			2.25 H	120	100.4	4.8
3	12390.00	60.1 PK	74.0	-13.9	3.91 H	339	47.8	12.3
4	12390.00	50.7 AV	54.0	-3.3	3.91 H	339	38.4	12.3
5	18585.00	57.3 PK	74.0	-16.7	3.63 H	63	62.3	-5.0
6	18585.00	45.5 AV	54.0	-8.5	3.63 H	63	50.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.7 PK			2.07 V	128	111.9	4.8
2	*6195.00	105.8 AV			2.07 V	128	101.0	4.8
3	12390.00	59.8 PK	74.0	-14.2	2.49 V	67	47.5	12.3
4	12390.00	49.9 AV	54.0	-4.1	2.49 V	67	37.6	12.3
5	18585.00	57.2 PK	74.0	-16.8	1.54 V	302	62.2	-5.0
6	18585.00	45.2 AV	54.0	-8.8	1.54 V	302	50.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.0 PK			2.24 H	113	110.6	6.4
2	*6415.00	106.1 AV			2.24 H	113	99.7	6.4
3	#12830.00	59.9 PK	88.2	-28.3	3.96 H	346	46.9	13.0
4	#12830.00	50.3 AV	68.2	-17.9	3.96 H	346	37.3	13.0
5	19245.00	57.4 PK	74.0	-16.6	3.68 H	56	61.2	-3.8
6	19245.00	45.6 AV	54.0	-8.4	3.68 H	56	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.4 PK			1.55 V	190	111.0	6.4
2	*6415.00	106.4 AV			1.55 V	190	100.0	6.4
3	#12830.00	59.9 PK	88.2	-28.3	2.41 V	65	46.9	13.0
4	#12830.00	49.6 AV	68.2	-18.6	2.41 V	65	36.6	13.0
5	19245.00	56.9 PK	74.0	-17.1	1.60 V	318	60.7	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.60 V	318	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.6 PK			2.22 H	124	109.7	6.9
2	*6535.00	105.7 AV			2.22 H	124	98.8	6.9
3	#13070.00	59.9 PK	88.2	-28.3	3.89 H	350	46.7	13.2
4	#13070.00	50.6 AV	68.2	-17.6	3.89 H	350	37.4	13.2
5	19605.00	57.5 PK	74.0	-16.5	3.68 H	57	61.5	-4.0
6	19605.00	46.1 AV	54.0	-7.9	3.68 H	57	50.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.2 PK			1.65 V	214	110.3	6.9
2	*6535.00	106.4 AV			1.65 V	214	99.5	6.9
3	#13070.00	59.5 PK	88.2	-28.7	2.49 V	42	46.3	13.2
4	#13070.00	49.2 AV	68.2	-19.0	2.49 V	42	36.0	13.2
5	19605.00	57.4 PK	74.0	-16.6	1.49 V	323	61.4	-4.0
6	19605.00	45.5 AV	54.0	-8.5	1.49 V	323	49.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			2.21 H	133	109.5	7.2
2	*6695.00	105.7 AV			2.21 H	133	98.5	7.2
3	13390.00	60.5 PK	74.0	-13.5	3.88 H	339	46.5	14.0
4	13390.00	50.5 AV	54.0	-3.5	3.88 H	339	36.5	14.0
5	20085.00	57.7 PK	74.0	-16.3	3.65 H	50	61.2	-3.5
6	20085.00	45.8 AV	54.0	-8.2	3.65 H	50	49.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.2 PK			1.62 V	221	110.0	7.2
2	*6695.00	106.6 AV			1.62 V	221	99.4	7.2
3	13390.00	59.5 PK	74.0	-14.5	2.49 V	64	45.5	14.0
4	13390.00	49.5 AV	54.0	-4.5	2.49 V	64	35.5	14.0
5	20085.00	56.9 PK	74.0	-17.1	1.58 V	298	60.4	-3.5
6	20085.00	45.3 AV	54.0	-8.7	1.58 V	298	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.4 PK			2.23 H	140	109.2	7.2
2	*6855.00	105.7 AV			2.23 H	140	98.5	7.2
3	#13710.00	59.9 PK	88.2	-28.3	3.85 H	352	44.7	15.2
4	#13710.00	50.3 AV	68.2	-17.9	3.85 H	352	35.1	15.2
5	20565.00	57.2 PK	74.0	-16.8	3.72 H	43	60.5	-3.3
6	20565.00	45.8 AV	54.0	-8.2	3.72 H	43	49.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.9 PK			2.06 V	129	109.7	7.2
2	*6855.00	105.9 AV			2.06 V	129	98.7	7.2
3	#13710.00	60.4 PK	88.2	-27.8	2.47 V	44	45.2	15.2
4	#13710.00	50.0 AV	68.2	-18.2	2.47 V	44	34.8	15.2
5	20565.00	57.6 PK	74.0	-16.4	1.49 V	311	60.9	-3.3
6	20565.00	45.6 AV	54.0	-8.4	1.49 V	311	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	2.27 H	117	75.0	4.3
2	#5925.00	66.4 AV	68.2	-1.8	2.27 H	117	62.1	4.3
3	*5965.00	112.7 PK			2.27 H	117	108.3	4.4
4	*5965.00	100.7 AV			2.27 H	117	96.3	4.4
5	11930.00	60.3 PK	74.0	-13.7	3.83 H	351	48.2	12.1
6	11930.00	50.9 AV	54.0	-3.1	3.83 H	351	38.8	12.1
7	17895.00	57.1 PK	74.0	-16.9	3.72 H	56	34.8	22.3
8	17895.00	45.9 AV	54.0	-8.1	3.72 H	56	23.6	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	1.71 V	200	73.7	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.71 V	200	62.2	4.3
3	*5965.00	112.8 PK			1.71 V	200	108.4	4.4
4	*5965.00	101.5 AV			1.71 V	200	97.1	4.4
5	11930.00	59.6 PK	74.0	-14.4	2.44 V	62	47.5	12.1
6	11930.00	49.4 AV	54.0	-4.6	2.44 V	62	37.3	12.1
7	17895.00	57.2 PK	74.0	-16.8	1.59 V	326	34.9	22.3
8	17895.00	45.4 AV	54.0	-8.6	1.59 V	326	23.1	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.0 PK			2.30 H	101	109.1	4.9
2	*6205.00	102.7 AV			2.30 H	101	97.8	4.9
3	12410.00	59.9 PK	74.0	-14.1	3.94 H	360	47.6	12.3
4	12410.00	50.7 AV	54.0	-3.3	3.94 H	360	38.4	12.3
5	18615.00	57.2 PK	74.0	-16.8	3.66 H	45	62.1	-4.9
6	18615.00	45.8 AV	54.0	-8.2	3.66 H	45	50.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.2 PK			1.70 V	214	109.3	4.9
2	*6205.00	102.9 AV			1.70 V	214	98.0	4.9
3	12410.00	59.2 PK	74.0	-14.8	2.42 V	48	46.9	12.3
4	12410.00	49.2 AV	54.0	-4.8	2.42 V	48	36.9	12.3
5	18615.00	57.3 PK	74.0	-16.7	1.56 V	304	62.2	-4.9
6	18615.00	45.6 AV	54.0	-8.4	1.56 V	304	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.3 PK			2.28 H	106	107.9	6.4
2	*6405.00	103.0 AV			2.28 H	106	96.6	6.4
3	#12810.00	59.6 PK	88.2	-28.6	3.90 H	338	46.8	12.8
4	#12810.00	50.3 AV	68.2	-17.9	3.90 H	338	37.5	12.8
5	19215.00	57.9 PK	74.0	-16.1	3.65 H	50	61.6	-3.7
6	19215.00	46.4 AV	54.0	-7.6	3.65 H	50	50.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.5 PK			1.72 V	224	108.1	6.4
2	*6405.00	102.9 AV			1.72 V	224	96.5	6.4
3	#12810.00	60.0 PK	88.2	-28.2	2.42 V	62	47.2	12.8
4	#12810.00	49.6 AV	68.2	-18.6	2.42 V	62	36.8	12.8
5	19215.00	57.1 PK	74.0	-16.9	1.52 V	324	60.8	-3.7
6	19215.00	45.6 AV	54.0	-8.4	1.52 V	324	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.0 PK			2.27 H	104	107.1	6.9
2	*6565.00	102.9 AV			2.27 H	104	96.0	6.9
3	#13130.00	60.4 PK	88.2	-27.8	3.87 H	341	47.2	13.2
4	#13130.00	50.8 AV	68.2	-17.4	3.87 H	341	37.6	13.2
5	19695.00	58.0 PK	74.0	-16.0	3.63 H	51	61.9	-3.9
6	19695.00	46.6 AV	54.0	-7.4	3.63 H	51	50.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.3 PK			1.72 V	209	107.4	6.9
2	*6565.00	103.2 AV			1.72 V	209	96.3	6.9
3	#13130.00	60.6 PK	88.2	-27.6	2.44 V	60	47.4	13.2
4	#13130.00	50.0 AV	68.2	-18.2	2.44 V	60	36.8	13.2
5	19695.00	57.6 PK	74.0	-16.4	1.56 V	326	61.5	-3.9
6	19695.00	45.9 AV	54.0	-8.1	1.56 V	326	49.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.9 PK			2.32 H	91	106.7	7.2
2	*6685.00	102.7 AV			2.32 H	91	95.5	7.2
3	13370.00	59.9 PK	74.0	-14.1	3.90 H	337	45.9	14.0
4	13370.00	50.5 AV	54.0	-3.5	3.90 H	337	36.5	14.0
5	20055.00	57.6 PK	74.0	-16.4	3.72 H	60	61.1	-3.5
6	20055.00	46.0 AV	54.0	-8.0	3.72 H	60	49.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.1 PK			1.68 V	216	106.9	7.2
2	*6685.00	102.8 AV			1.68 V	216	95.6	7.2
3	13370.00	60.6 PK	74.0	-13.4	2.46 V	49	46.6	14.0
4	13370.00	50.0 AV	54.0	-4.0	2.46 V	49	36.0	14.0
5	20055.00	56.6 PK	74.0	-17.4	1.57 V	338	60.1	-3.5
6	20055.00	45.3 AV	54.0	-8.7	1.57 V	338	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.3 PK			2.29 H	91	107.2	7.1
2	*6845.00	103.1 AV			2.29 H	91	96.0	7.1
3	#13690.00	59.6 PK	88.2	-28.6	3.86 H	356	44.5	15.1
4	#13690.00	50.2 AV	68.2	-18.0	3.86 H	356	35.1	15.1
5	20535.00	57.4 PK	74.0	-16.6	3.72 H	43	60.6	-3.2
6	20535.00	45.8 AV	54.0	-8.2	3.72 H	43	49.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.3 PK			1.64 V	201	107.2	7.1
2	*6845.00	103.0 AV			1.64 V	201	95.9	7.1
3	#13690.00	60.6 PK	88.2	-27.6	2.42 V	66	45.5	15.1
4	#13690.00	50.0 AV	68.2	-18.2	2.42 V	66	34.9	15.1
5	20535.00	57.0 PK	74.0	-17.0	1.56 V	318	60.2	-3.2
6	20535.00	45.4 AV	54.0	-8.6	1.56 V	318	48.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	2.50 H	118	69.6	4.3
2	#5925.00	62.3 AV	68.2	-5.9	2.50 H	118	58.0	4.3
3	*5985.00	109.1 PK			2.50 H	118	104.7	4.4
4	*5985.00	97.2 AV			2.50 H	118	92.8	4.4
5	11970.00	59.5 PK	74.0	-14.5	3.87 H	358	47.3	12.2
6	11970.00	50.2 AV	54.0	-3.8	3.87 H	358	38.0	12.2
7	17955.00	57.9 PK	74.0	-16.1	3.73 H	28	34.5	23.4
8	17955.00	46.1 AV	54.0	-7.9	3.73 H	28	22.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.58 V	201	72.5	4.3
2	#5925.00	65.4 AV	68.2	-2.8	1.58 V	201	61.1	4.3
3	*5985.00	109.6 PK			1.58 V	201	105.2	4.4
4	*5985.00	98.0 AV			1.58 V	201	93.6	4.4
5	11970.00	59.4 PK	74.0	-14.6	2.47 V	63	47.2	12.2
6	11970.00	49.3 AV	54.0	-4.7	2.47 V	63	37.1	12.2
7	17955.00	57.2 PK	74.0	-16.8	1.57 V	323	33.8	23.4
8	17955.00	45.5 AV	54.0	-8.5	1.57 V	323	22.1	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.6 PK			2.53 H	120	107.6	5.0
2	*6225.00	101.2 AV			2.53 H	120	96.2	5.0
3	12450.00	59.0 PK	74.0	-15.0	3.86 H	357	46.7	12.3
4	12450.00	49.9 AV	54.0	-4.1	3.86 H	357	37.6	12.3
5	18675.00	57.2 PK	74.0	-16.8	3.78 H	54	62.1	-4.9
6	18675.00	45.7 AV	54.0	-8.3	3.78 H	54	50.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.8 PK			2.05 V	128	107.8	5.0
2	*6225.00	101.7 AV			2.05 V	128	96.7	5.0
3	12450.00	59.9 PK	74.0	-14.1	2.39 V	71	47.6	12.3
4	12450.00	49.3 AV	54.0	-4.7	2.39 V	71	37.0	12.3
5	18675.00	57.2 PK	74.0	-16.8	1.51 V	313	62.1	-4.9
6	18675.00	45.5 AV	54.0	-8.5	1.51 V	313	50.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.7 PK			2.54 H	115	106.5	6.2
2	*6385.00	101.5 AV			2.54 H	115	95.3	6.2
3	#12770.00	59.2 PK	88.2	-29.0	3.86 H	353	46.4	12.8
4	#12770.00	49.9 AV	68.2	-18.3	3.86 H	353	37.1	12.8
5	19155.00	57.1 PK	74.0	-16.9	3.78 H	37	60.9	-3.8
6	19155.00	45.5 AV	54.0	-8.5	3.78 H	37	49.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.5 PK			2.10 V	129	106.3	6.2
2	*6385.00	101.6 AV			2.10 V	129	95.4	6.2
3	#12770.00	59.7 PK	88.2	-28.5	2.44 V	59	46.9	12.8
4	#12770.00	49.1 AV	68.2	-19.1	2.44 V	59	36.3	12.8
5	19155.00	57.3 PK	74.0	-16.7	1.47 V	310	61.1	-3.8
6	19155.00	45.5 AV	54.0	-8.5	1.47 V	310	49.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.6 PK			2.47 H	114	105.7	6.9
2	*6625.00	101.4 AV			2.47 H	114	94.5	6.9
3	13250.00	59.6 PK	74.0	-14.4	3.85 H	360	46.0	13.6
4	13250.00	50.8 AV	54.0	-3.2	3.85 H	360	37.2	13.6
5	19875.00	57.8 PK	74.0	-16.2	3.67 H	56	61.3	-3.5
6	19875.00	46.3 AV	54.0	-7.7	3.67 H	56	49.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.9 PK			2.11 V	144	106.0	6.9
2	*6625.00	102.0 AV			2.11 V	144	95.1	6.9
3	13250.00	59.7 PK	74.0	-14.3	2.44 V	63	46.1	13.6
4	13250.00	49.3 AV	54.0	-4.7	2.44 V	63	35.7	13.6
5	19875.00	57.1 PK	74.0	-16.9	1.55 V	311	60.6	-3.5
6	19875.00	45.9 AV	54.0	-8.1	1.55 V	311	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.8 PK			2.57 H	109	105.6	7.2
2	*6705.00	101.4 AV			2.57 H	109	94.2	7.2
3	#13410.00	59.4 PK	88.2	-28.8	3.90 H	357	45.2	14.2
4	#13410.00	49.8 AV	68.2	-18.4	3.90 H	357	35.6	14.2
5	20115.00	57.1 PK	74.0	-16.9	3.74 H	44	60.6	-3.5
6	20115.00	45.6 AV	54.0	-8.4	3.74 H	44	49.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.7 PK			2.10 V	135	105.5	7.2
2	*6705.00	101.5 AV			2.10 V	135	94.3	7.2
3	#13410.00	59.7 PK	88.2	-28.5	2.47 V	48	45.5	14.2
4	#13410.00	49.2 AV	68.2	-19.0	2.47 V	48	35.0	14.2
5	20115.00	57.0 PK	74.0	-17.0	1.54 V	321	60.5	-3.5
6	20115.00	45.3 AV	54.0	-8.7	1.54 V	321	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.1 PK			2.58 H	135	106.1	7.0
2	*6785.00	101.6 AV			2.58 H	135	94.6	7.0
3	#13570.00	59.2 PK	88.2	-29.0	3.91 H	360	44.6	14.6
4	#13570.00	49.9 AV	68.2	-18.3	3.91 H	360	35.3	14.6
5	20355.00	56.6 PK	74.0	-17.4	3.72 H	32	59.7	-3.1
6	20355.00	45.3 AV	54.0	-8.7	3.72 H	32	48.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.3 PK			1.99 V	133	106.3	7.0
2	*6785.00	102.0 AV			1.99 V	133	95.0	7.0
3	#13570.00	59.8 PK	88.2	-28.4	2.46 V	72	45.2	14.6
4	#13570.00	49.6 AV	68.2	-18.6	2.46 V	72	35.0	14.6
5	20355.00	56.8 PK	74.0	-17.2	1.49 V	308	59.9	-3.1
6	20355.00	45.2 AV	54.0	-8.8	1.49 V	308	48.3	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	2.21 H	128	72.0	4.3
2	#5925.00	62.9 AV	68.2	-5.3	2.21 H	128	58.6	4.3
3	*6025.00	106.9 PK			2.21 H	128	102.7	4.2
4	*6025.00	94.5 AV			2.21 H	128	90.3	4.2
5	12050.00	59.4 PK	74.0	-14.6	3.81 H	348	47.0	12.4
6	12050.00	49.7 AV	54.0	-4.3	3.81 H	348	37.3	12.4
7	18075.00	57.7 PK	74.0	-16.3	3.73 H	42	62.4	-4.7
8	18075.00	46.1 AV	54.0	-7.9	3.73 H	42	50.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	1.54 V	181	73.8	4.3
2	#5925.00	65.2 AV	68.2	-3.0	1.54 V	181	60.9	4.3
3	*6025.00	107.6 PK			1.54 V	181	103.4	4.2
4	*6025.00	95.2 AV			1.54 V	181	91.0	4.2
5	12050.00	59.4 PK	74.0	-14.6	2.38 V	63	47.0	12.4
6	12050.00	49.2 AV	54.0	-4.8	2.38 V	63	36.8	12.4
7	18075.00	56.8 PK	74.0	-17.2	1.50 V	340	61.5	-4.7
8	18075.00	45.5 AV	54.0	-8.5	1.50 V	340	50.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.1 PK			2.25 H	138	102.3	4.8
2	*6185.00	94.7 AV			2.25 H	138	89.9	4.8
3	12370.00	60.0 PK	74.0	-14.0	3.91 H	350	47.7	12.3
4	12370.00	50.3 AV	54.0	-3.7	3.91 H	350	38.0	12.3
5	18555.00	57.7 PK	74.0	-16.3	3.69 H	44	62.6	-4.9
6	18555.00	46.2 AV	54.0	-7.8	3.69 H	44	51.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.2 PK			1.60 V	168	102.4	4.8
2	*6185.00	95.0 AV			1.60 V	168	90.2	4.8
3	12370.00	60.3 PK	74.0	-13.7	2.46 V	71	48.0	12.3
4	12370.00	49.8 AV	54.0	-4.2	2.46 V	71	37.5	12.3
5	18555.00	57.4 PK	74.0	-16.6	1.47 V	309	62.3	-4.9
6	18555.00	45.6 AV	54.0	-8.4	1.47 V	309	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.6 PK			2.23 H	125	100.5	6.1
2	*6345.00	94.5 AV			2.23 H	125	88.4	6.1
3	12690.00	60.1 PK	74.0	-13.9	3.81 H	343	47.2	12.9
4	12690.00	50.8 AV	54.0	-3.2	3.81 H	343	37.9	12.9
5	19035.00	57.0 PK	74.0	-17.0	3.76 H	35	60.9	-3.9
6	19035.00	45.3 AV	54.0	-8.7	3.76 H	35	49.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.0 PK			1.49 V	186	101.9	6.1
2	*6345.00	95.7 AV			1.49 V	186	89.6	6.1
3	12690.00	60.4 PK	74.0	-13.6	2.41 V	47	47.5	12.9
4	12690.00	50.0 AV	54.0	-4.0	2.41 V	47	37.1	12.9
5	19035.00	57.1 PK	74.0	-16.9	1.53 V	325	61.0	-3.9
6	19035.00	45.5 AV	54.0	-8.5	1.53 V	325	49.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			2.22 H	133	98.9	7.2
2	*6665.00	94.0 AV			2.22 H	133	86.8	7.2
3	13330.00	59.7 PK	74.0	-14.3	3.84 H	360	45.9	13.8
4	13330.00	50.1 AV	54.0	-3.9	3.84 H	360	36.3	13.8
5	19995.00	57.4 PK	74.0	-16.6	3.68 H	37	61.0	-3.6
6	19995.00	45.7 AV	54.0	-8.3	3.68 H	37	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.6 PK			1.53 V	168	100.4	7.2
2	*6665.00	95.5 AV			1.53 V	168	88.3	7.2
3	13330.00	59.7 PK	74.0	-14.3	2.39 V	61	45.9	13.8
4	13330.00	49.2 AV	54.0	-4.8	2.39 V	61	35.4	13.8
5	19995.00	57.1 PK	74.0	-16.9	1.57 V	329	60.7	-3.6
6	19995.00	45.6 AV	54.0	-8.4	1.57 V	329	49.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.3 PK	88.2	-12.9	2.25 H	129	71.0	4.3
2	#5925.00	55.6 AV	68.2	-12.6	2.25 H	129	51.3	4.3
3	*5955.00	122.5 PK			2.25 H	129	118.0	4.5
4	*5955.00	114.2 AV			2.25 H	129	109.7	4.5
5	11910.00	58.7 PK	74.0	-15.3	3.86 H	357	46.5	12.2
6	11910.00	48.9 AV	54.0	-5.1	3.86 H	357	36.7	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.62 H	24	35.4	21.9
8	17865.00	45.1 AV	54.0	-8.9	3.62 H	24	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	1.99 V	154	75.0	4.3
2	#5925.00	58.6 AV	68.2	-9.6	1.99 V	154	54.3	4.3
3	*5955.00	122.7 PK			1.99 V	154	118.2	4.5
4	*5955.00	114.7 AV			1.99 V	154	110.2	4.5
5	11910.00	57.7 PK	74.0	-16.3	3.62 V	64	45.5	12.2
6	11910.00	47.5 AV	54.0	-6.5	3.62 V	64	35.3	12.2
7	17865.00	54.9 PK	74.0	-19.1	1.50 V	322	33.0	21.9
8	17865.00	43.5 AV	54.0	-10.5	1.50 V	322	21.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.1 PK			2.23 H	118	117.3	4.8
2	*6195.00	113.9 AV			2.23 H	118	109.1	4.8
3	12390.00	59.2 PK	74.0	-14.8	3.84 H	347	46.9	12.3
4	12390.00	49.3 AV	54.0	-4.7	3.84 H	347	37.0	12.3
5	18585.00	56.9 PK	74.0	-17.1	3.64 H	28	61.9	-5.0
6	18585.00	44.8 AV	54.0	-9.2	3.64 H	28	49.8	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.5 PK			2.01 V	144	118.7	4.8
2	*6195.00	115.2 AV			2.01 V	144	110.4	4.8
3	12390.00	57.8 PK	74.0	-16.2	3.63 V	60	45.5	12.3
4	12390.00	47.7 AV	54.0	-6.3	3.63 V	60	35.4	12.3
5	18585.00	54.9 PK	74.0	-19.1	1.47 V	325	59.9	-5.0
6	18585.00	43.8 AV	54.0	-10.2	1.47 V	325	48.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.0 PK			2.20 H	132	116.6	6.4
2	*6415.00	114.4 AV			2.20 H	132	108.0	6.4
3	#12830.00	58.4 PK	88.2	-29.8	3.82 H	360	45.4	13.0
4	#12830.00	48.5 AV	68.2	-19.7	3.82 H	360	35.5	13.0
5	19245.00	57.5 PK	74.0	-16.5	3.61 H	15	61.3	-3.8
6	19245.00	45.3 AV	54.0	-8.7	3.61 H	15	49.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			2.04 V	145	116.3	6.4
2	*6415.00	114.8 AV			2.04 V	145	108.4	6.4
3	#12830.00	58.0 PK	88.2	-30.2	3.57 V	54	45.0	13.0
4	#12830.00	47.8 AV	68.2	-20.4	3.57 V	54	34.8	13.0
5	19245.00	55.1 PK	74.0	-18.9	1.47 V	338	58.9	-3.8
6	19245.00	43.9 AV	54.0	-10.1	1.47 V	338	47.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.5 PK			2.25 H	131	115.6	6.9
2	*6535.00	114.1 AV			2.25 H	131	107.2	6.9
3	#13070.00	58.7 PK	88.2	-29.5	3.81 H	360	45.5	13.2
4	#13070.00	49.1 AV	68.2	-19.1	3.81 H	360	35.9	13.2
5	19605.00	57.2 PK	74.0	-16.8	3.62 H	14	61.2	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.62 H	14	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.0 PK			1.97 V	144	115.1	6.9
2	*6535.00	114.2 AV			1.97 V	144	107.3	6.9
3	#13070.00	57.6 PK	88.2	-30.6	3.56 V	77	44.4	13.2
4	#13070.00	47.7 AV	68.2	-20.5	3.56 V	77	34.5	13.2
5	19605.00	55.3 PK	74.0	-18.7	1.46 V	321	59.3	-4.0
6	19605.00	43.9 AV	54.0	-10.1	1.46 V	321	47.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.29 H	139	115.1	7.2
2	*6695.00	113.9 AV			2.29 H	139	106.7	7.2
3	13390.00	58.8 PK	74.0	-15.2	3.85 H	343	44.8	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.85 H	343	34.9	14.0
5	20085.00	57.9 PK	74.0	-16.1	3.63 H	21	61.4	-3.5
6	20085.00	45.5 AV	54.0	-8.5	3.63 H	21	49.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.0 PK			2.02 V	153	114.8	7.2
2	*6695.00	114.3 AV			2.02 V	153	107.1	7.2
3	13390.00	57.4 PK	74.0	-16.6	3.64 V	77	43.4	14.0
4	13390.00	47.1 AV	54.0	-6.9	3.64 V	77	33.1	14.0
5	20085.00	54.4 PK	74.0	-19.6	1.50 V	309	57.9	-3.5
6	20085.00	43.2 AV	54.0	-10.8	1.50 V	309	46.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.9 PK			2.20 H	129	115.7	7.2
2	*6855.00	114.6 AV			2.20 H	129	107.4	7.2
3	#13710.00	58.5 PK	88.2	-29.7	3.89 H	354	43.3	15.2
4	#13710.00	48.6 AV	68.2	-19.6	3.89 H	354	33.4	15.2
5	20565.00	56.9 PK	74.0	-17.1	3.59 H	12	60.2	-3.3
6	20565.00	44.9 AV	54.0	-9.1	3.59 H	12	48.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.7 PK			1.94 V	139	115.5	7.2
2	*6855.00	114.8 AV			1.94 V	139	107.6	7.2
3	#13710.00	57.7 PK	88.2	-30.5	3.58 V	74	42.5	15.2
4	#13710.00	47.5 AV	68.2	-20.7	3.58 V	74	32.3	15.2
5	20565.00	54.5 PK	74.0	-19.5	1.51 V	313	57.8	-3.3
6	20565.00	43.2 AV	54.0	-10.8	1.51 V	313	46.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.3 PK	88.2	-4.9	2.26 H	118	79.0	4.3
2	#5925.00	63.3 AV	68.2	-4.9	2.26 H	118	59.0	4.3
3	*5955.00	121.9 PK			2.26 H	118	117.4	4.5
4	*5955.00	112.2 AV			2.26 H	118	107.7	4.5
5	11910.00	58.8 PK	74.0	-15.2	3.90 H	360	46.6	12.2
6	11910.00	48.8 AV	54.0	-5.2	3.90 H	360	36.6	12.2
7	17865.00	57.1 PK	74.0	-16.9	3.65 H	21	35.2	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.65 H	21	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.2 PK	88.2	-2.0	2.11 V	160	81.9	4.3
2	#5925.00	59.2 AV	68.2	-9.0	2.11 V	160	54.9	4.3
3	*5955.00	122.3 PK			2.11 V	160	117.8	4.5
4	*5955.00	112.2 AV			2.11 V	160	107.7	4.5
5	11910.00	57.3 PK	74.0	-16.7	3.65 V	55	45.1	12.2
6	11910.00	47.3 AV	54.0	-6.7	3.65 V	55	35.1	12.2
7	17865.00	54.7 PK	74.0	-19.3	1.55 V	323	32.8	21.9
8	17865.00	43.4 AV	54.0	-10.6	1.55 V	323	21.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.7 PK			2.30 H	110	116.9	4.8
2	*6195.00	112.1 AV			2.30 H	110	107.3	4.8
3	12390.00	58.9 PK	74.0	-15.1	3.90 H	349	46.6	12.3
4	12390.00	49.3 AV	54.0	-4.7	3.90 H	349	37.0	12.3
5	18585.00	57.3 PK	74.0	-16.7	3.62 H	28	62.3	-5.0
6	18585.00	45.1 AV	54.0	-8.9	3.62 H	28	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.3 PK			2.07 V	145	117.5	4.8
2	*6195.00	112.1 AV			2.07 V	145	107.3	4.8
3	12390.00	57.7 PK	74.0	-16.3	3.63 V	54	45.4	12.3
4	12390.00	47.3 AV	54.0	-6.7	3.63 V	54	35.0	12.3
5	18585.00	54.7 PK	74.0	-19.3	1.51 V	318	59.7	-5.0
6	18585.00	43.0 AV	54.0	-11.0	1.51 V	318	48.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.8 PK			2.31 H	129	115.4	6.4
2	*6415.00	112.0 AV			2.31 H	129	105.6	6.4
3	#12830.00	59.3 PK	88.2	-28.9	3.82 H	348	46.3	13.0
4	#12830.00	49.4 AV	68.2	-18.8	3.82 H	348	36.4	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.65 H	39	60.4	-3.8
6	19245.00	44.7 AV	54.0	-9.3	3.65 H	39	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			2.16 V	146	115.8	6.4
2	*6415.00	112.3 AV			2.16 V	146	105.9	6.4
3	#12830.00	58.2 PK	88.2	-30.0	3.61 V	48	45.2	13.0
4	#12830.00	47.8 AV	68.2	-20.4	3.61 V	48	34.8	13.0
5	19245.00	55.3 PK	74.0	-18.7	1.51 V	310	59.1	-3.8
6	19245.00	43.7 AV	54.0	-10.3	1.51 V	310	47.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			2.25 H	104	114.7	6.9
2	*6535.00	111.8 AV			2.25 H	104	104.9	6.9
3	#13070.00	58.8 PK	88.2	-29.4	3.89 H	345	45.6	13.2
4	#13070.00	49.1 AV	68.2	-19.1	3.89 H	345	35.9	13.2
5	19605.00	57.2 PK	74.0	-16.8	3.64 H	30	61.2	-4.0
6	19605.00	45.2 AV	54.0	-8.8	3.64 H	30	49.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.7 PK			2.13 V	161	115.8	6.9
2	*6535.00	112.4 AV			2.13 V	161	105.5	6.9
3	#13070.00	57.8 PK	88.2	-30.4	3.64 V	76	44.6	13.2
4	#13070.00	47.6 AV	68.2	-20.6	3.64 V	76	34.4	13.2
5	19605.00	55.3 PK	74.0	-18.7	1.46 V	318	59.3	-4.0
6	19605.00	44.0 AV	54.0	-10.0	1.46 V	318	48.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.31 H	115	115.1	7.2
2	*6695.00	112.4 AV			2.31 H	115	105.2	7.2
3	13390.00	58.5 PK	74.0	-15.5	3.87 H	360	44.5	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.87 H	360	34.9	14.0
5	20085.00	56.8 PK	74.0	-17.2	3.61 H	10	60.3	-3.5
6	20085.00	44.9 AV	54.0	-9.1	3.61 H	10	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.7 PK			2.10 V	172	114.5	7.2
2	*6695.00	111.8 AV			2.10 V	172	104.6	7.2
3	13390.00	57.5 PK	74.0	-16.5	3.62 V	61	43.5	14.0
4	13390.00	47.5 AV	54.0	-6.5	3.62 V	61	33.5	14.0
5	20085.00	55.4 PK	74.0	-18.6	1.50 V	335	58.9	-3.5
6	20085.00	43.8 AV	54.0	-10.2	1.50 V	335	47.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.6 PK			2.26 H	105	114.4	7.2
2	*6855.00	111.9 AV			2.26 H	105	104.7	7.2
3	#13710.00	58.5 PK	88.2	-29.7	3.81 H	351	43.3	15.2
4	#13710.00	48.9 AV	68.2	-19.3	3.81 H	351	33.7	15.2
5	20565.00	57.6 PK	74.0	-16.4	3.58 H	37	60.9	-3.3
6	20565.00	45.6 AV	54.0	-8.4	3.58 H	37	48.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.3 PK			2.06 V	171	115.1	7.2
2	*6855.00	112.4 AV			2.06 V	171	105.2	7.2
3	#13710.00	57.7 PK	88.2	-30.5	3.63 V	67	42.5	15.2
4	#13710.00	47.6 AV	68.2	-20.6	3.63 V	67	32.4	15.2
5	20565.00	55.5 PK	74.0	-18.5	1.48 V	332	58.8	-3.3
6	20565.00	43.9 AV	54.0	-10.1	1.48 V	332	47.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.26 H	118	73.7	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.26 H	118	55.6	4.3
3	*5955.00	120.1 PK			2.26 H	118	115.6	4.5
4	*5955.00	109.0 AV			2.26 H	118	104.5	4.5
5	11910.00	59.1 PK	74.0	-14.9	3.82 H	360	46.9	12.2
6	11910.00	49.3 AV	54.0	-4.7	3.82 H	360	37.1	12.2
7	17865.00	57.0 PK	74.0	-17.0	3.58 H	36	35.1	21.9
8	17865.00	45.0 AV	54.0	-9.0	3.58 H	36	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.17 V	168	73.7	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.17 V	168	55.6	4.3
3	*5955.00	120.5 PK			2.17 V	168	116.0	4.5
4	*5955.00	109.9 AV			2.17 V	168	105.4	4.5
5	11910.00	58.1 PK	74.0	-15.9	3.61 V	61	45.9	12.2
6	11910.00	48.0 AV	54.0	-6.0	3.61 V	61	35.8	12.2
7	17865.00	54.2 PK	74.0	-19.8	1.54 V	311	32.3	21.9
8	17865.00	43.0 AV	54.0	-11.0	1.54 V	311	21.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			2.26 H	119	115.1	4.8
2	*6195.00	108.7 AV			2.26 H	119	103.9	4.8
3	12390.00	58.8 PK	74.0	-15.2	3.91 H	360	46.5	12.3
4	12390.00	48.7 AV	54.0	-5.3	3.91 H	360	36.4	12.3
5	18585.00	57.8 PK	74.0	-16.2	3.67 H	10	62.8	-5.0
6	18585.00	45.3 AV	54.0	-8.7	3.67 H	10	50.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.8 PK			2.14 V	162	115.0	4.8
2	*6195.00	109.5 AV			2.14 V	162	104.7	4.8
3	12390.00	57.9 PK	74.0	-16.1	3.60 V	60	45.6	12.3
4	12390.00	47.9 AV	54.0	-6.1	3.60 V	60	35.6	12.3
5	18585.00	54.8 PK	74.0	-19.2	1.48 V	313	59.8	-5.0
6	18585.00	43.1 AV	54.0	-10.9	1.48 V	313	48.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.2 PK			2.21 H	114	113.8	6.4
2	*6415.00	109.0 AV			2.21 H	114	102.6	6.4
3	#12830.00	58.5 PK	88.2	-29.7	3.81 H	349	45.5	13.0
4	#12830.00	48.9 AV	68.2	-19.3	3.81 H	349	35.9	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.63 H	11	60.4	-3.8
6	19245.00	44.6 AV	54.0	-9.4	3.63 H	11	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.1 PK			2.16 V	170	113.7	6.4
2	*6415.00	109.5 AV			2.16 V	170	103.1	6.4
3	#12830.00	57.4 PK	88.2	-30.8	3.66 V	70	44.4	13.0
4	#12830.00	47.5 AV	68.2	-20.7	3.66 V	70	34.5	13.0
5	19245.00	54.6 PK	74.0	-19.4	1.49 V	337	58.4	-3.8
6	19245.00	43.1 AV	54.0	-10.9	1.49 V	337	46.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.5 PK			2.22 H	114	113.6	6.9
2	*6535.00	109.2 AV			2.22 H	114	102.3	6.9
3	#13070.00	58.3 PK	88.2	-29.9	3.85 H	353	45.1	13.2
4	#13070.00	48.6 AV	68.2	-19.6	3.85 H	353	35.4	13.2
5	19605.00	57.1 PK	74.0	-16.9	3.59 H	29	61.1	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.59 H	29	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.5 PK			2.19 V	173	113.6	6.9
2	*6535.00	109.7 AV			2.19 V	173	102.8	6.9
3	#13070.00	58.1 PK	88.2	-30.1	3.65 V	76	44.9	13.2
4	#13070.00	47.6 AV	68.2	-20.6	3.65 V	76	34.4	13.2
5	19605.00	55.0 PK	74.0	-19.0	1.51 V	329	59.0	-4.0
6	19605.00	43.7 AV	54.0	-10.3	1.51 V	329	47.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.1 PK			2.28 H	105	112.9	7.2
2	*6695.00	108.7 AV			2.28 H	105	101.5	7.2
3	13390.00	58.4 PK	74.0	-15.6	3.87 H	343	44.4	14.0
4	13390.00	48.8 AV	54.0	-5.2	3.87 H	343	34.8	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.59 H	33	61.0	-3.5
6	20085.00	45.4 AV	54.0	-8.6	3.59 H	33	48.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.0 PK			2.23 V	165	112.8	7.2
2	*6695.00	109.4 AV			2.23 V	165	102.2	7.2
3	13390.00	57.8 PK	74.0	-16.2	3.63 V	66	43.8	14.0
4	13390.00	47.3 AV	54.0	-6.7	3.63 V	66	33.3	14.0
5	20085.00	54.2 PK	74.0	-19.8	1.53 V	311	57.7	-3.5
6	20085.00	43.0 AV	54.0	-11.0	1.53 V	311	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.1 PK			2.27 H	112	112.9	7.2
2	*6855.00	108.8 AV			2.27 H	112	101.6	7.2
3	#13710.00	58.4 PK	88.2	-29.8	3.89 H	360	43.2	15.2
4	#13710.00	48.5 AV	68.2	-19.7	3.89 H	360	33.3	15.2
5	20565.00	57.7 PK	74.0	-16.3	3.59 H	29	61.0	-3.3
6	20565.00	45.4 AV	54.0	-8.6	3.59 H	29	48.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.9 PK			2.14 V	156	113.7	7.2
2	*6855.00	110.3 AV			2.14 V	156	103.1	7.2
3	#13710.00	57.3 PK	88.2	-30.9	3.57 V	60	42.1	15.2
4	#13710.00	47.2 AV	68.2	-21.0	3.57 V	60	32.0	15.2
5	20565.00	55.3 PK	74.0	-18.7	1.45 V	313	58.6	-3.3
6	20565.00	43.7 AV	54.0	-10.3	1.45 V	313	47.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	2.25 H	127	72.2	4.3
2	#5925.00	56.9 AV	68.2	-11.3	2.25 H	127	52.6	4.3
3	*5955.00	121.0 PK			2.25 H	127	116.5	4.5
4	*5955.00	110.3 AV			2.25 H	127	105.8	4.5
5	11910.00	58.9 PK	74.0	-15.1	3.86 H	360	46.7	12.2
6	11910.00	49.3 AV	54.0	-4.7	3.86 H	360	37.1	12.2
7	17865.00	56.9 PK	74.0	-17.1	3.61 H	37	35.0	21.9
8	17865.00	44.9 AV	54.0	-9.1	3.61 H	37	23.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.5 PK	88.2	-9.7	2.11 V	161	74.2	4.3
2	#5925.00	53.2 AV	68.2	-15.0	2.11 V	161	48.9	4.3
3	*5955.00	121.9 PK			2.11 V	161	117.4	4.5
4	*5955.00	110.9 AV			2.11 V	161	106.4	4.5
5	11910.00	57.5 PK	74.0	-16.5	3.60 V	71	45.3	12.2
6	11910.00	47.4 AV	54.0	-6.6	3.60 V	71	35.2	12.2
7	17865.00	54.9 PK	74.0	-19.1	1.45 V	326	33.0	21.9
8	17865.00	43.7 AV	54.0	-10.3	1.45 V	326	21.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.2 PK			2.20 H	140	114.0	7.2
2	*6695.00	110.3 AV			2.20 H	140	103.1	7.2
3	13390.00	58.6 PK	74.0	-15.4	3.82 H	351	44.6	14.0
4	13390.00	49.2 AV	54.0	-4.8	3.82 H	351	35.2	14.0
5	20085.00	57.0 PK	74.0	-17.0	3.63 H	46	60.5	-3.5
6	20085.00	44.9 AV	54.0	-9.1	3.63 H	46	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.15 V	156	115.1	7.2
2	*6695.00	111.4 AV			2.15 V	156	104.2	7.2
3	13390.00	57.1 PK	74.0	-16.9	3.58 V	72	43.1	14.0
4	13390.00	47.0 AV	54.0	-7.0	3.58 V	72	33.0	14.0
5	20085.00	54.8 PK	74.0	-19.2	1.49 V	315	58.3	-3.5
6	20085.00	43.8 AV	54.0	-10.2	1.49 V	315	47.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.0 PK	88.2	-13.2	2.25 H	128	70.7	4.3
2	#5925.00	56.6 AV	68.2	-11.6	2.25 H	128	52.3	4.3
3	*5955.00	118.6 PK			2.25 H	128	114.1	4.5
4	*5955.00	108.3 AV			2.25 H	128	103.8	4.5
5	11910.00	58.4 PK	74.0	-15.6	3.91 H	346	46.2	12.2
6	11910.00	48.8 AV	54.0	-5.2	3.91 H	346	36.6	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.66 H	16	35.3	21.9
8	17865.00	45.3 AV	54.0	-8.7	3.66 H	16	23.4	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	2.20 V	179	65.8	4.3
2	#5925.00	55.6 AV	68.2	-12.6	2.20 V	179	51.3	4.3
3	*5955.00	119.1 PK			2.20 V	179	114.6	4.5
4	*5955.00	109.1 AV			2.20 V	179	104.6	4.5
5	11910.00	57.8 PK	74.0	-16.2	3.57 V	67	45.6	12.2
6	11910.00	47.3 AV	54.0	-6.7	3.57 V	67	35.1	12.2
7	17865.00	55.0 PK	74.0	-19.0	1.47 V	325	33.1	21.9
8	17865.00	43.6 AV	54.0	-10.4	1.47 V	325	21.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.5 PK			2.31 H	139	111.3	7.2
2	*6695.00	108.4 AV			2.31 H	139	101.2	7.2
3	13390.00	58.4 PK	74.0	-15.6	3.90 H	352	44.4	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.90 H	352	34.9	14.0
5	20085.00	56.7 PK	74.0	-17.3	3.60 H	23	60.2	-3.5
6	20085.00	45.0 AV	54.0	-9.0	3.60 H	23	48.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.8 PK			2.23 V	184	112.6	7.2
2	*6695.00	109.6 AV			2.23 V	184	102.4	7.2
3	13390.00	58.1 PK	74.0	-15.9	3.60 V	54	44.1	14.0
4	13390.00	47.8 AV	54.0	-6.2	3.60 V	54	33.8	14.0
5	20085.00	54.6 PK	74.0	-19.4	1.43 V	322	58.1	-3.5
6	20085.00	43.5 AV	54.0	-10.5	1.43 V	322	47.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	2.30 H	128	73.1	4.3
2	#5925.00	64.3 AV	68.2	-3.9	2.30 H	128	60.0	4.3
3	*5985.00	109.8 PK			2.30 H	128	105.4	4.4
4	*5985.00	98.8 AV			2.30 H	128	94.4	4.4
5	11970.00	58.3 PK	74.0	-15.7	3.84 H	357	46.1	12.2
6	11970.00	48.6 AV	54.0	-5.4	3.84 H	357	36.4	12.2
7	17955.00	57.6 PK	74.0	-16.4	3.63 H	27	34.2	23.4
8	17955.00	45.1 AV	54.0	-8.9	3.63 H	27	21.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.7 PK	88.2	-11.5	2.18 V	178	72.4	4.3
2	#5925.00	64.3 AV	68.2	-3.9	2.18 V	178	60.0	4.3
3	*5985.00	109.9 PK			2.18 V	178	105.5	4.4
4	*5985.00	99.1 AV			2.18 V	178	94.7	4.4
5	11970.00	57.6 PK	74.0	-16.4	3.61 V	75	45.4	12.2
6	11970.00	47.4 AV	54.0	-6.6	3.61 V	75	35.2	12.2
7	17955.00	54.6 PK	74.0	-19.4	1.46 V	322	31.2	23.4
8	17955.00	43.2 AV	54.0	-10.8	1.46 V	322	19.8	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.7 PK			2.34 H	137	102.5	7.2
2	*6705.00	98.5 AV			2.34 H	137	91.3	7.2
3	#13410.00	57.8 PK	88.2	-30.4	3.83 H	360	43.6	14.2
4	#13410.00	48.4 AV	68.2	-19.8	3.83 H	360	34.2	14.2
5	20115.00	56.8 PK	74.0	-17.2	3.67 H	40	60.3	-3.5
6	20115.00	44.6 AV	54.0	-9.4	3.67 H	40	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.5 PK			2.12 V	172	103.3	7.2
2	*6705.00	99.5 AV			2.12 V	172	92.3	7.2
3	#13410.00	57.7 PK	88.2	-30.5	3.58 V	90	43.5	14.2
4	#13410.00	47.7 AV	68.2	-20.5	3.58 V	90	33.5	14.2
5	20115.00	55.1 PK	74.0	-18.9	1.45 V	337	58.6	-3.5
6	20115.00	43.5 AV	54.0	-10.5	1.45 V	337	47.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.4 PK	88.2	-9.8	2.31 H	128	74.1	4.3
2	#5925.00	65.2 AV	68.2	-3.0	2.31 H	128	60.9	4.3
3	*6025.00	107.4 PK			2.31 H	128	103.2	4.2
4	*6025.00	95.6 AV			2.31 H	128	91.4	4.2
5	12050.00	59.3 PK	74.0	-14.7	3.84 H	344	46.9	12.4
6	12050.00	49.4 AV	54.0	-4.6	3.84 H	344	37.0	12.4
7	18075.00	57.3 PK	74.0	-16.7	3.63 H	35	62.0	-4.7
8	18075.00	45.1 AV	54.0	-8.9	3.63 H	35	49.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.1 PK	88.2	-8.1	2.13 V	178	75.8	4.3
2	#5925.00	65.6 AV	68.2	-2.6	2.13 V	178	61.3	4.3
3	*6025.00	108.1 PK			2.13 V	178	103.9	4.2
4	*6025.00	95.6 AV			2.13 V	178	91.4	4.2
5	12050.00	58.1 PK	74.0	-15.9	3.64 V	64	45.7	12.4
6	12050.00	47.7 AV	54.0	-6.3	3.64 V	64	35.3	12.4
7	18075.00	55.0 PK	74.0	-19.0	1.55 V	320	59.7	-4.7
8	18075.00	43.7 AV	54.0	-10.3	1.55 V	320	48.4	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.3 PK			2.33 H	115	100.1	7.2
2	*6665.00	95.2 AV			2.33 H	115	88.0	7.2
3	13330.00	59.0 PK	74.0	-15.0	3.90 H	347	45.2	13.8
4	13330.00	49.0 AV	54.0	-5.0	3.90 H	347	35.2	13.8
5	19995.00	56.9 PK	74.0	-17.1	3.69 H	30	60.5	-3.6
6	19995.00	44.7 AV	54.0	-9.3	3.69 H	30	48.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.3 PK			2.13 V	192	101.1	7.2
2	*6665.00	95.5 AV			2.13 V	192	88.3	7.2
3	13330.00	58.0 PK	74.0	-16.0	3.70 V	52	44.2	13.8
4	13330.00	47.7 AV	54.0	-6.3	3.70 V	52	33.9	13.8
5	19995.00	55.3 PK	74.0	-18.7	1.60 V	310	58.9	-3.6
6	19995.00	43.9 AV	54.0	-10.1	1.60 V	310	47.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	2.30 H	118	72.9	4.3
2	#5925.00	62.3 AV	68.2	-5.9	2.30 H	118	58.0	4.3
3	*6025.00	106.8 PK			2.30 H	118	102.6	4.2
4	*6025.00	94.1 AV			2.30 H	118	89.9	4.2
5	12050.00	59.0 PK	74.0	-15.0	3.83 H	353	46.6	12.4
6	12050.00	49.2 AV	54.0	-4.8	3.83 H	353	36.8	12.4
7	18075.00	57.3 PK	74.0	-16.7	3.57 H	9	62.0	-4.7
8	18075.00	45.4 AV	54.0	-8.6	3.57 H	9	50.1	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	2.11 V	178	73.3	4.3
2	#5925.00	63.3 AV	68.2	-4.9	2.11 V	178	59.0	4.3
3	*6025.00	107.0 PK			2.11 V	178	102.8	4.2
4	*6025.00	94.4 AV			2.11 V	178	90.2	4.2
5	12050.00	57.2 PK	74.0	-16.8	3.57 V	73	44.8	12.4
6	12050.00	47.2 AV	54.0	-6.8	3.57 V	73	34.8	12.4
7	18075.00	54.8 PK	74.0	-19.2	1.51 V	334	59.5	-4.7
8	18075.00	43.6 AV	54.0	-10.4	1.51 V	334	48.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.3 PK			2.24 H	105	99.1	7.2
2	*6665.00	93.8 AV			2.24 H	105	86.6	7.2
3	13330.00	58.7 PK	74.0	-15.3	3.87 H	355	44.9	13.8
4	13330.00	49.2 AV	54.0	-4.8	3.87 H	355	35.4	13.8
5	19995.00	57.8 PK	74.0	-16.2	3.52 H	8	61.4	-3.6
6	19995.00	45.8 AV	54.0	-8.2	3.52 H	8	49.4	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.9 PK			2.14 V	170	99.7	7.2
2	*6665.00	94.5 AV			2.14 V	170	87.3	7.2
3	13330.00	56.7 PK	74.0	-17.3	3.52 V	74	42.9	13.8
4	13330.00	47.0 AV	54.0	-7.0	3.52 V	74	33.2	13.8
5	19995.00	54.4 PK	74.0	-19.6	1.57 V	349	58.0	-3.6
6	19995.00	43.2 AV	54.0	-10.8	1.57 V	349	46.8	-3.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


2Tx

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

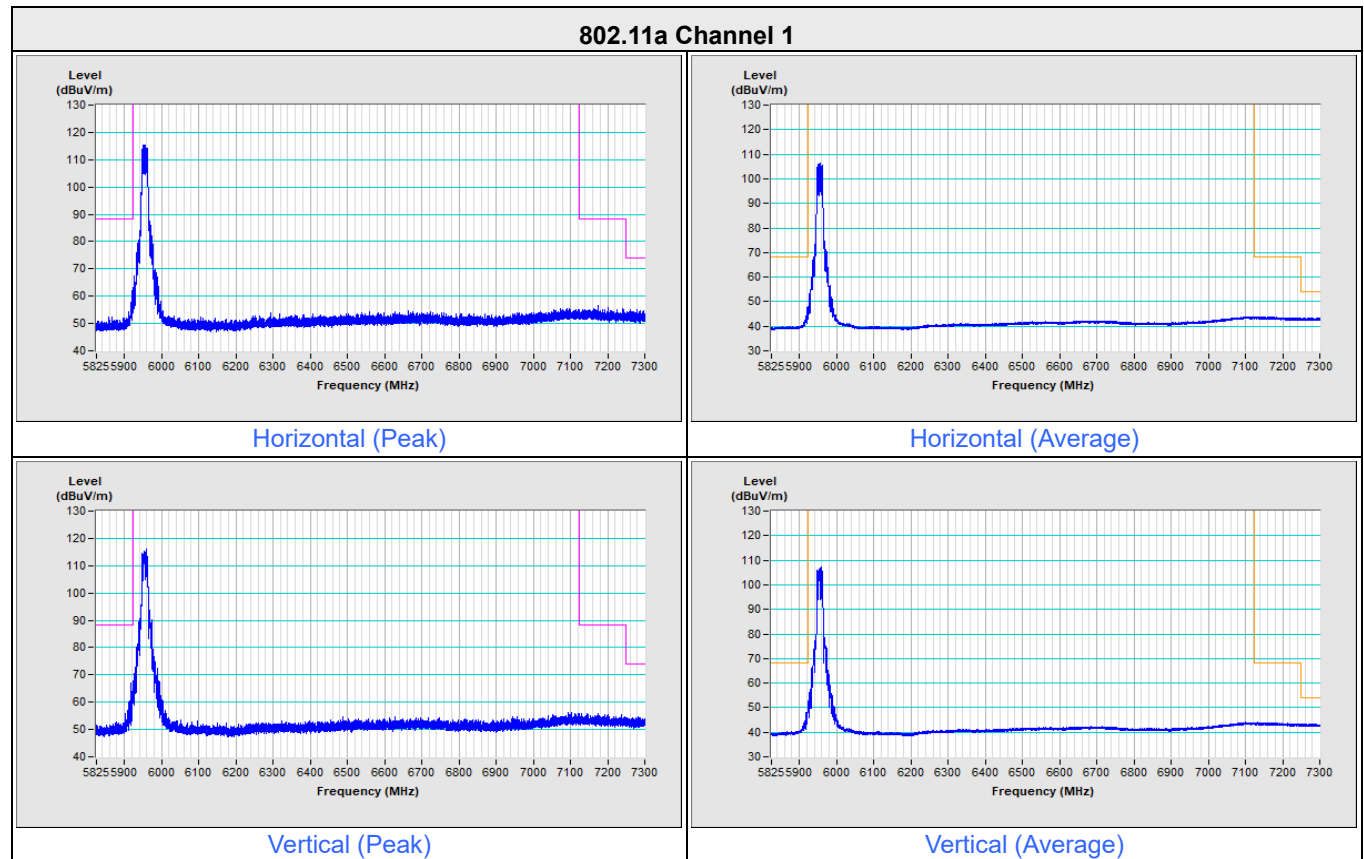


2Tx NSS2

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

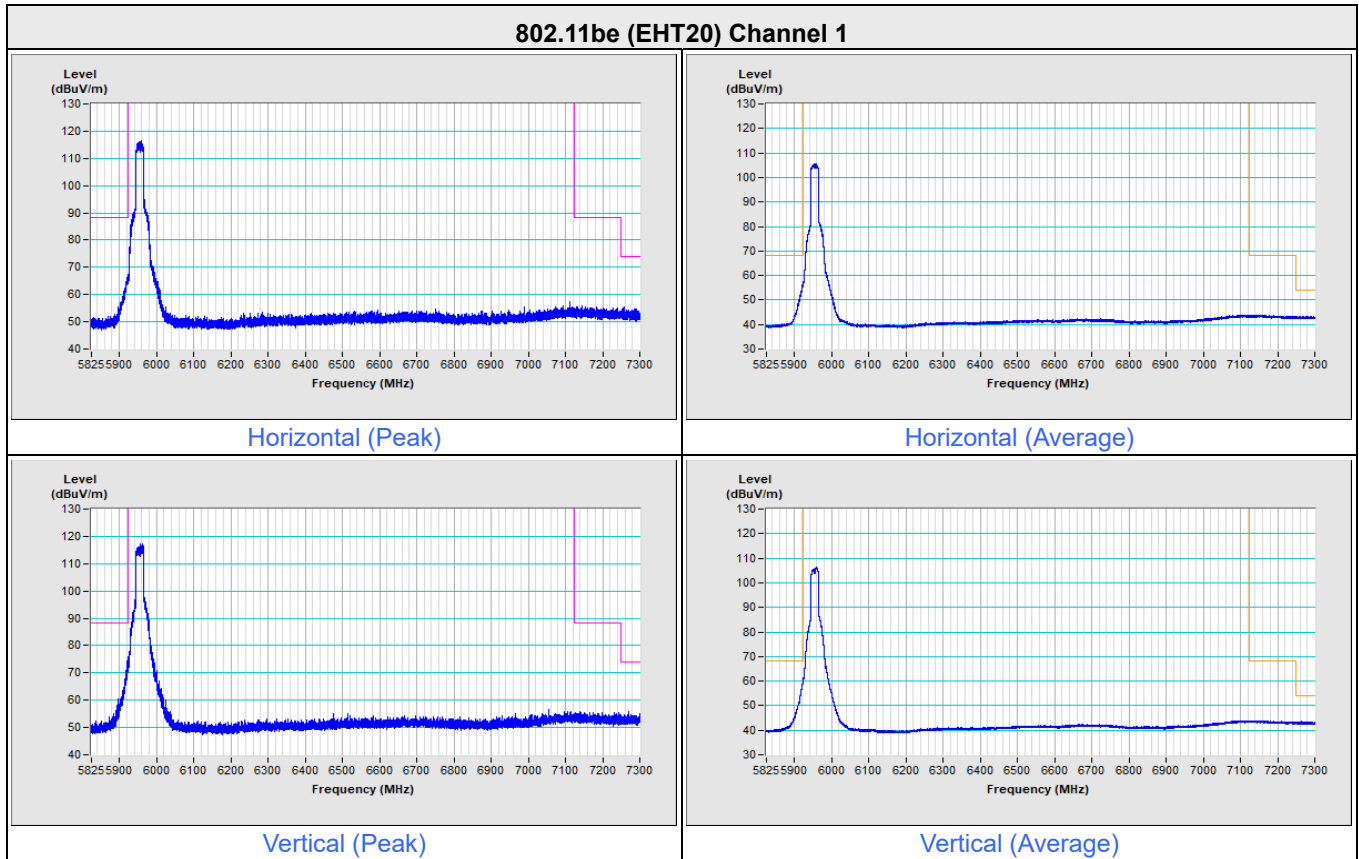


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

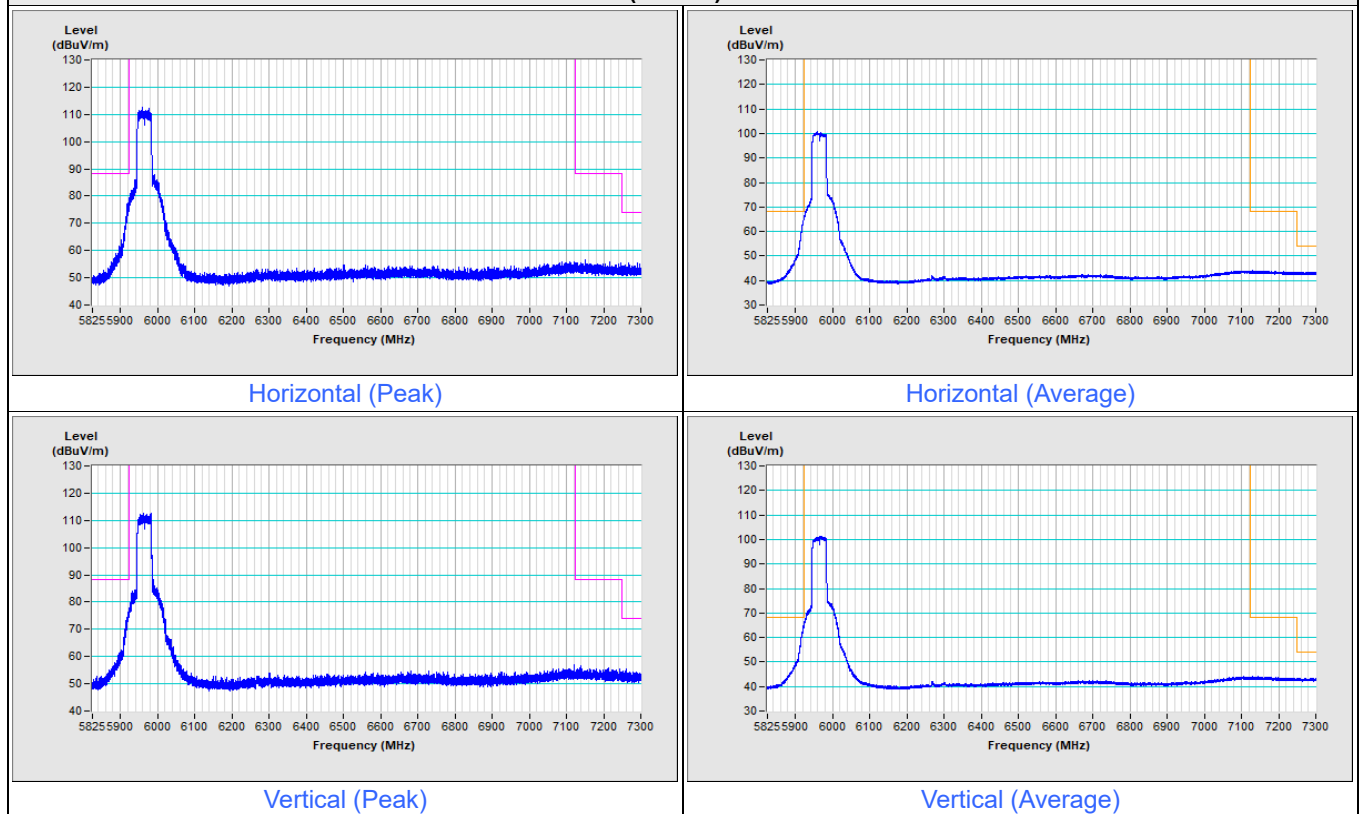


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

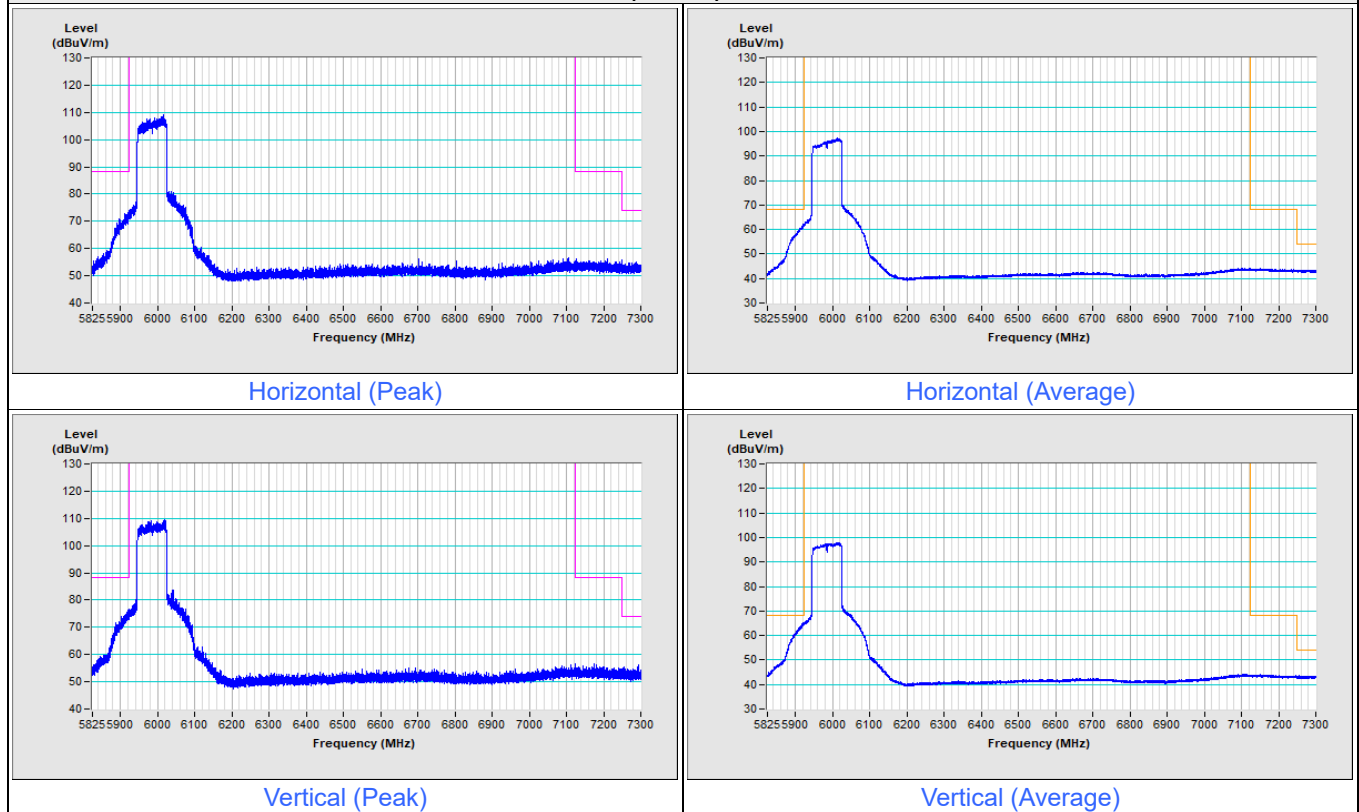


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

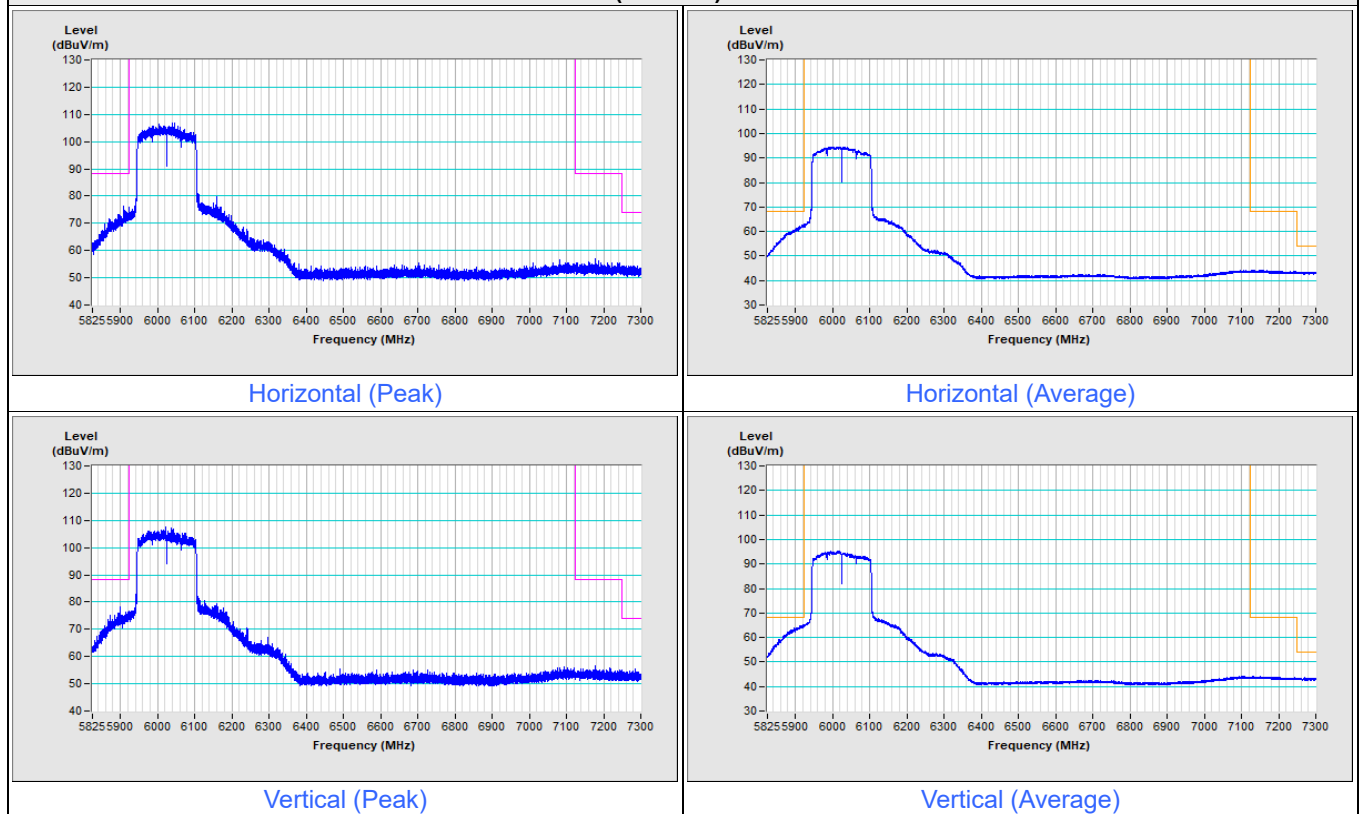


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

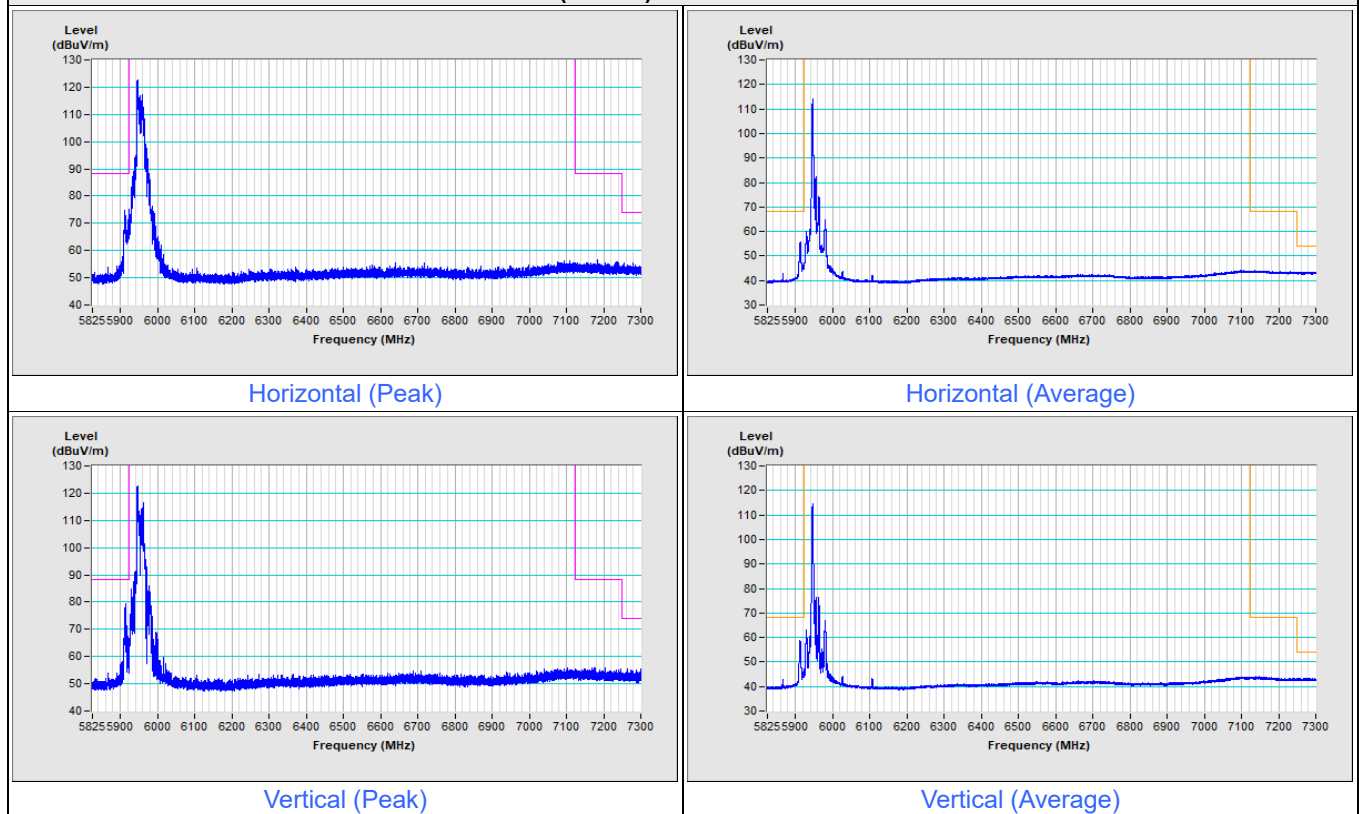


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

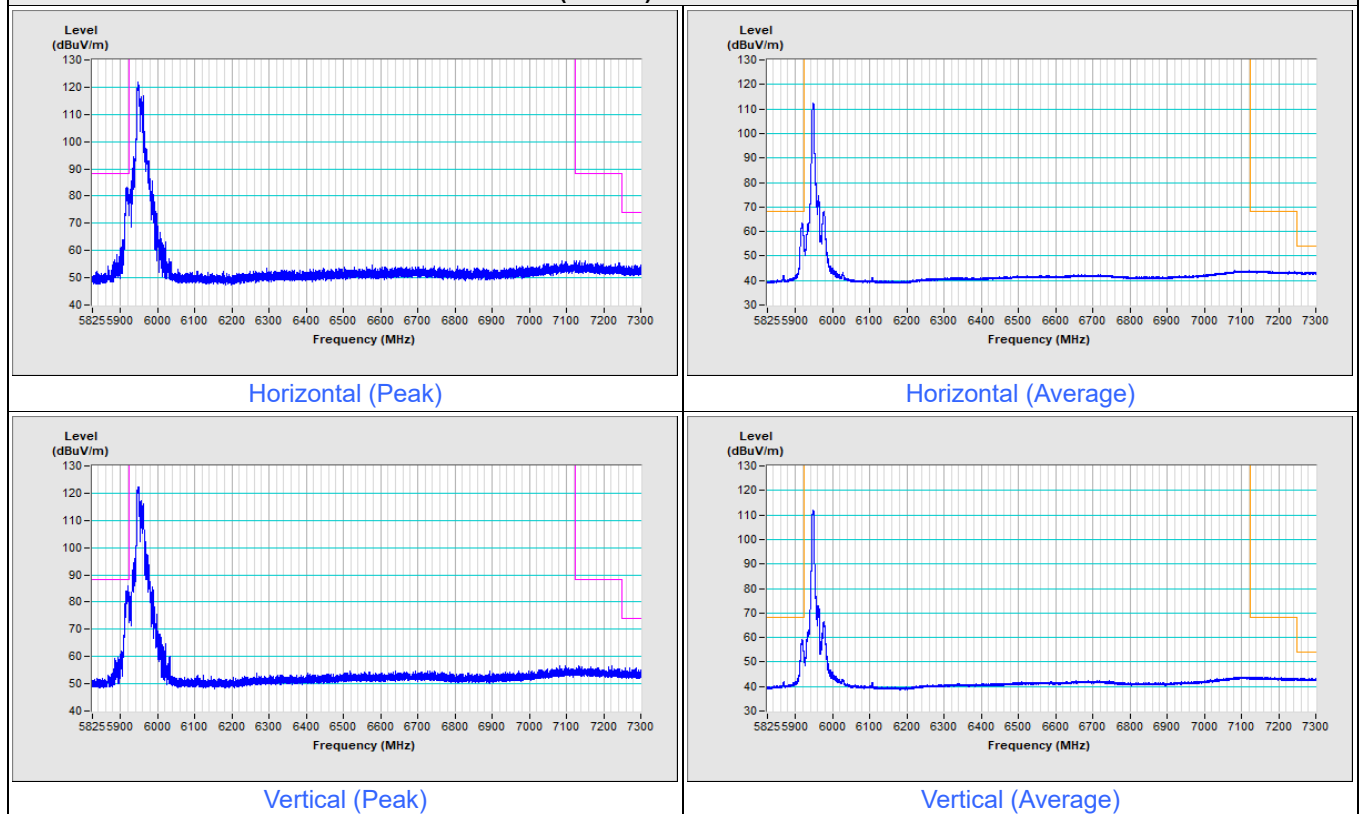


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

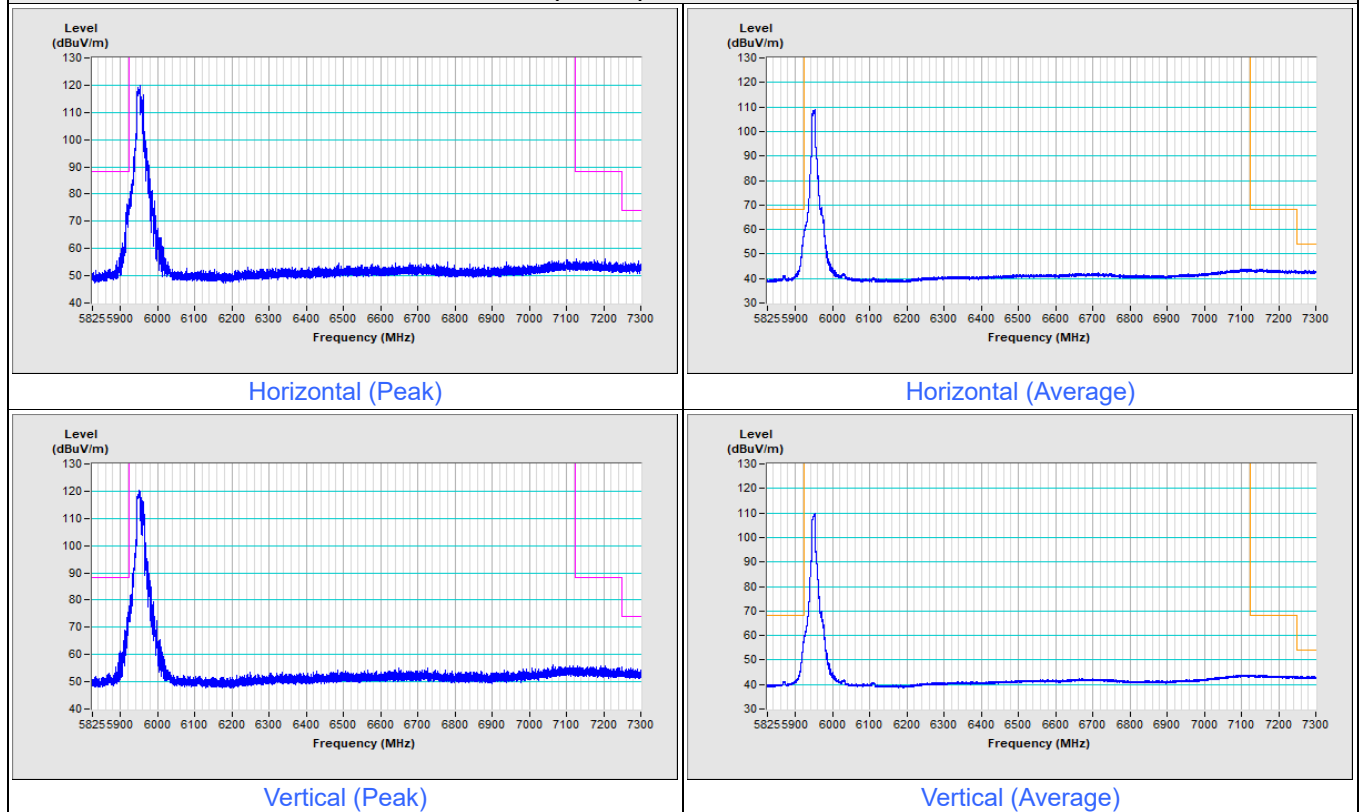


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

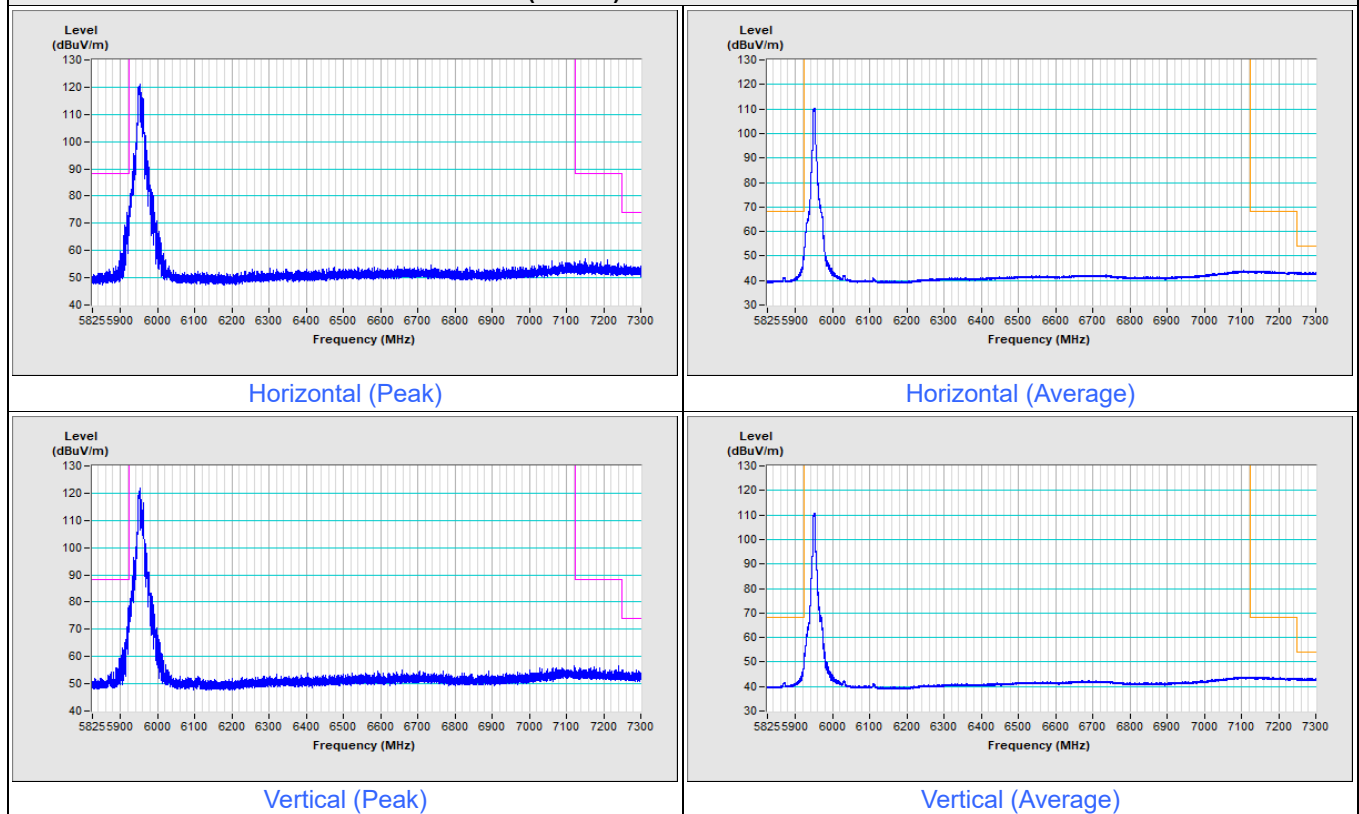


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

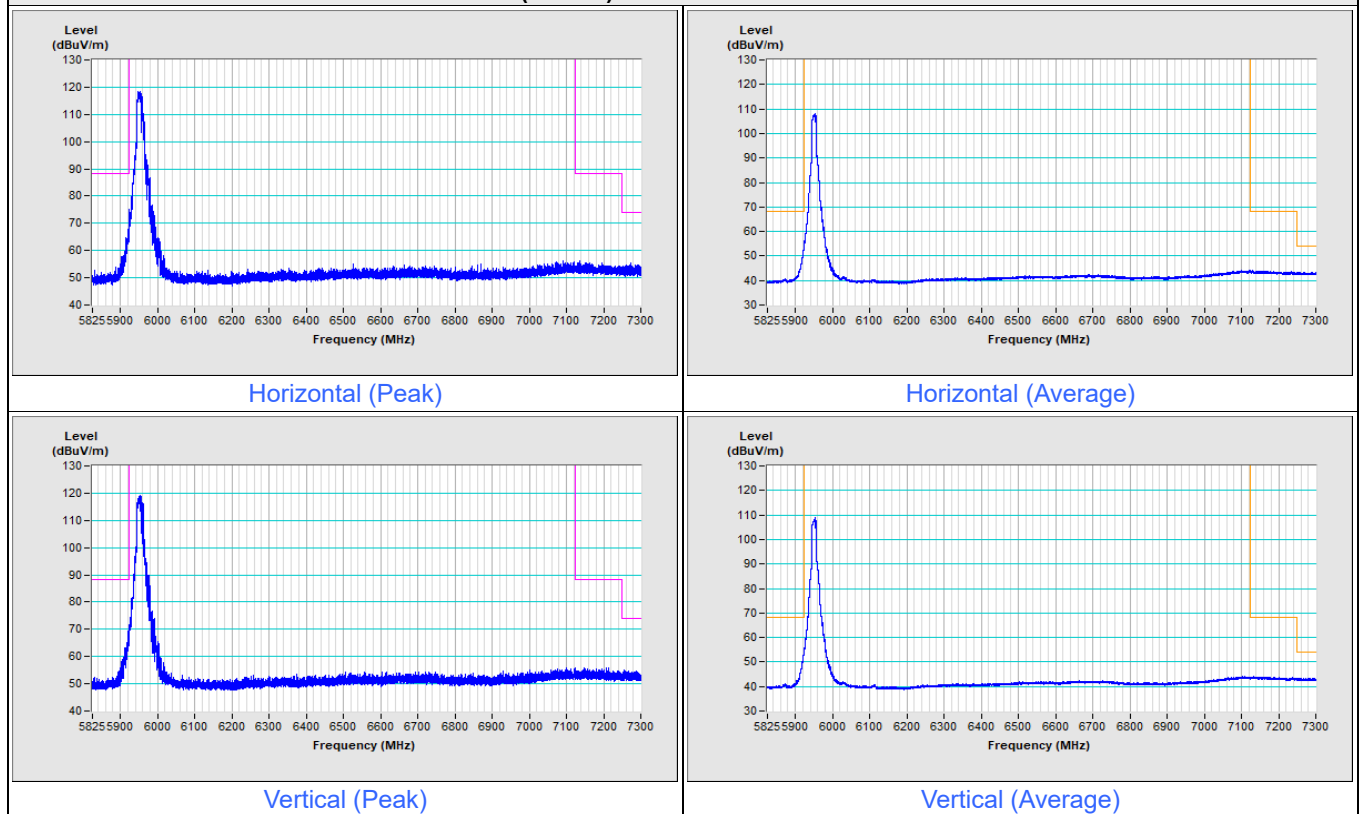


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 7

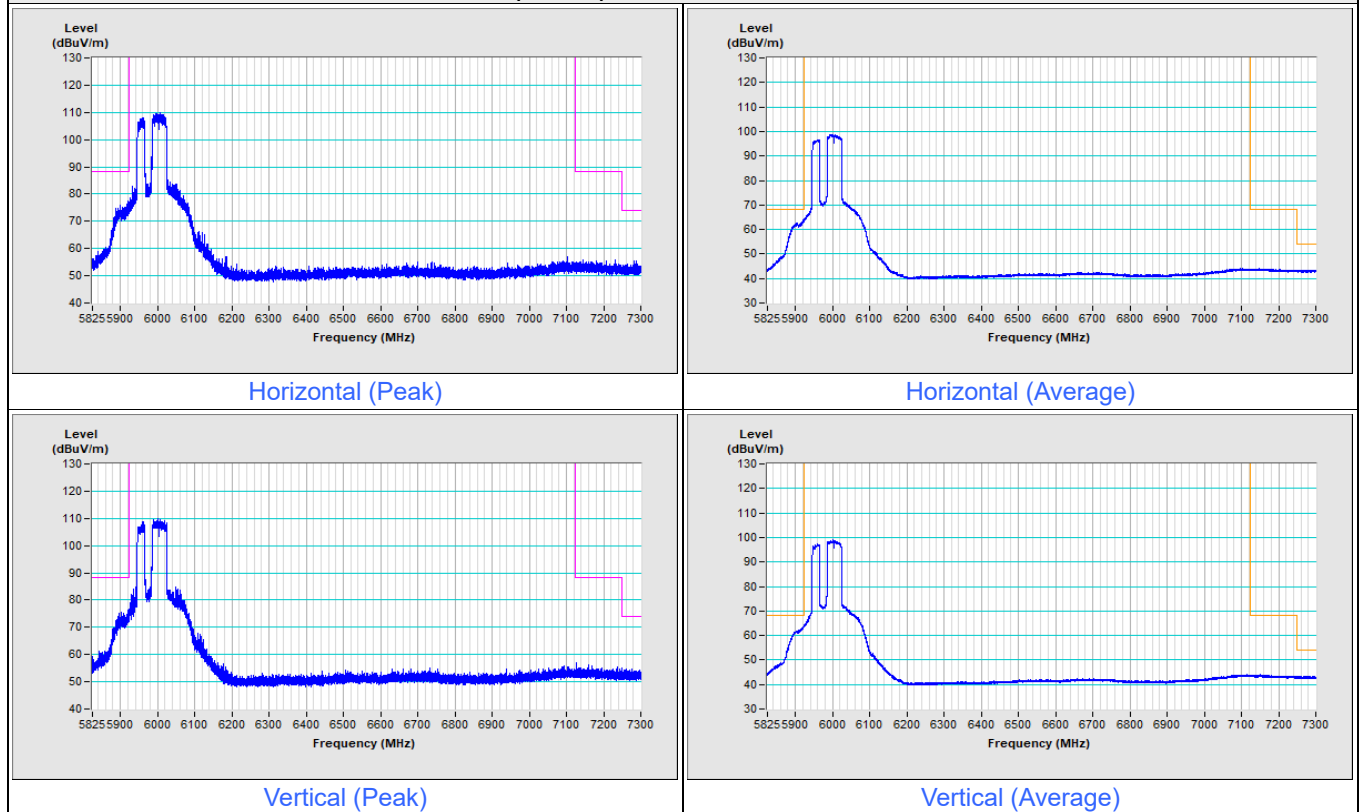


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 15

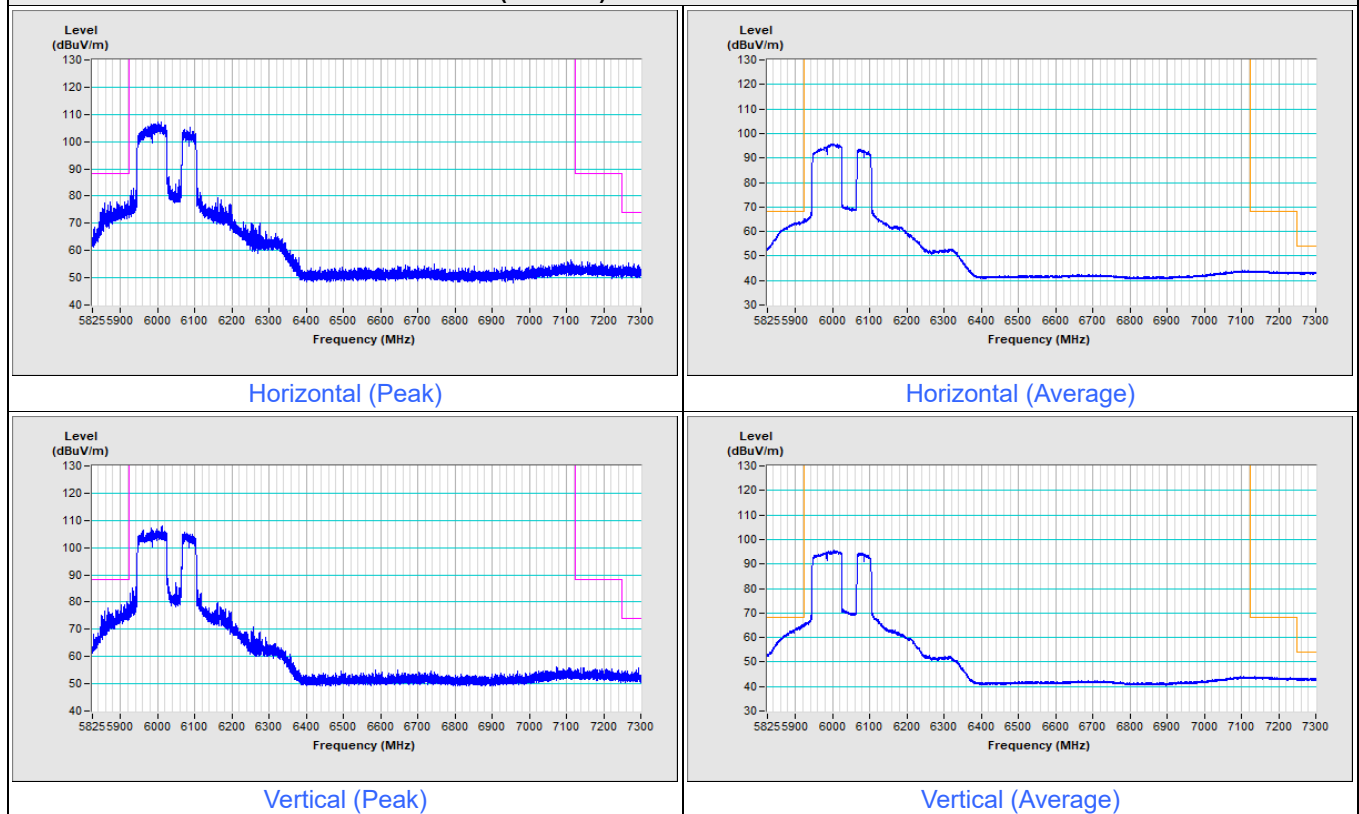

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 15

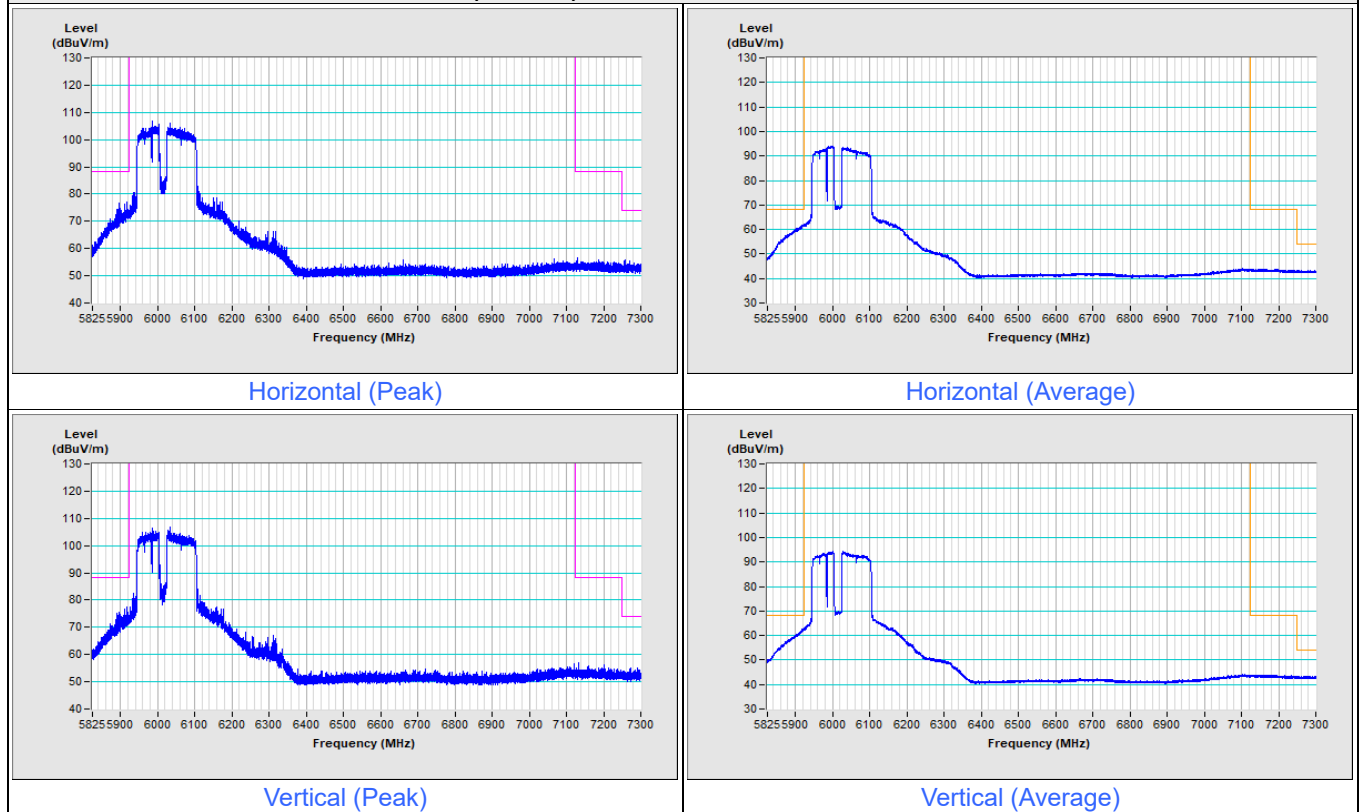

Mode B

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.6 PK	88.2	-19.6	1.13 H	298	64.3	4.3
2	#5925.00	55.6 AV	68.2	-12.6	1.13 H	298	51.3	4.3
3	*5955.00	114.9 PK			1.13 H	298	110.4	4.5
4	*5955.00	105.4 AV			1.13 H	298	100.9	4.5
5	11910.00	50.5 PK	74.0	-23.5	3.81 H	103	38.3	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.81 H	103	26.1	12.2
7	17865.00	55.5 PK	74.0	-18.5	3.54 H	333	33.6	21.9
8	17865.00	44.3 AV	54.0	-9.7	3.54 H	333	22.4	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.5 PK	88.2	-17.7	1.05 V	281	66.2	4.3
2	#5925.00	57.5 AV	68.2	-10.7	1.05 V	281	53.2	4.3
3	*5955.00	112.0 PK			1.05 V	281	107.5	4.5
4	*5955.00	102.6 AV			1.05 V	281	98.1	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.86 V	316	41.6	12.2
6	11910.00	41.6 AV	54.0	-12.4	3.86 V	316	29.4	12.2
7	17865.00	57.9 PK	74.0	-16.1	3.22 V	170	36.0	21.9
8	17865.00	46.8 AV	54.0	-7.2	3.22 V	170	24.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.2 PK			3.52 H	255	110.4	4.8
2	*6195.00	106.1 AV			3.52 H	255	101.3	4.8
3	12390.00	50.5 PK	74.0	-23.5	3.85 H	106	38.2	12.3
4	12390.00	38.2 AV	54.0	-15.8	3.85 H	106	25.9	12.3
5	18585.00	55.8 PK	74.0	-18.2	3.49 H	338	60.8	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.49 H	338	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.6 PK			1.14 V	95	106.8	4.8
2	*6195.00	103.7 AV			1.14 V	95	98.9	4.8
3	12390.00	53.5 PK	74.0	-20.5	3.85 V	311	41.2	12.3
4	12390.00	41.5 AV	54.0	-12.5	3.85 V	311	29.2	12.3
5	18585.00	57.5 PK	74.0	-16.5	3.16 V	158	62.5	-5.0
6	18585.00	46.7 AV	54.0	-7.3	3.16 V	158	51.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			3.67 H	243	108.7	6.4
2	*6415.00	105.9 AV			3.67 H	243	99.5	6.4
3	#12830.00	50.1 PK	88.2	-38.1	3.84 H	112	37.1	13.0
4	#12830.00	37.9 AV	68.2	-30.3	3.84 H	112	24.9	13.0
5	19245.00	54.8 PK	74.0	-19.2	3.60 H	328	58.6	-3.8
6	19245.00	43.9 AV	54.0	-10.1	3.60 H	328	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.8 PK			1.13 V	104	106.4	6.4
2	*6415.00	103.7 AV			1.13 V	104	97.3	6.4
3	#12830.00	54.1 PK	88.2	-34.1	3.86 V	312	41.1	13.0
4	#12830.00	41.8 AV	68.2	-26.4	3.86 V	312	28.8	13.0
5	19245.00	58.3 PK	74.0	-15.7	3.28 V	168	62.1	-3.8
6	19245.00	47.0 AV	54.0	-7.0	3.28 V	168	50.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			1.06 H	210	109.2	6.9
2	*6535.00	107.1 AV			1.06 H	210	100.2	6.9
3	#13070.00	50.6 PK	88.2	-37.6	3.79 H	94	37.4	13.2
4	#13070.00	38.2 AV	68.2	-30.0	3.79 H	94	25.0	13.2
5	19605.00	55.1 PK	74.0	-18.9	3.59 H	326	59.1	-4.0
6	19605.00	44.0 AV	54.0	-10.0	3.59 H	326	48.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.9 PK			1.11 V	108	107.0	6.9
2	*6535.00	103.7 AV			1.11 V	108	96.8	6.9
3	#13070.00	53.7 PK	88.2	-34.5	3.84 V	305	40.5	13.2
4	#13070.00	41.5 AV	68.2	-26.7	3.84 V	305	28.3	13.2
5	19605.00	57.3 PK	74.0	-16.7	3.20 V	156	61.3	-4.0
6	19605.00	46.4 AV	54.0	-7.6	3.20 V	156	50.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.3 PK			1.17 H	214	109.1	7.2
2	*6695.00	106.2 AV			1.17 H	214	99.0	7.2
3	13390.00	51.1 PK	74.0	-22.9	3.76 H	98	37.1	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.76 H	98	24.6	14.0
5	20085.00	55.7 PK	74.0	-18.3	3.53 H	331	59.2	-3.5
6	20085.00	44.3 AV	54.0	-9.7	3.53 H	331	47.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.6 PK			1.12 V	90	106.4	7.2
2	*6695.00	103.1 AV			1.12 V	90	95.9	7.2
3	13390.00	53.7 PK	74.0	-20.3	3.86 V	310	39.7	14.0
4	13390.00	41.4 AV	54.0	-12.6	3.86 V	310	27.4	14.0
5	20085.00	58.3 PK	74.0	-15.7	3.27 V	158	61.8	-3.5
6	20085.00	47.1 AV	54.0	-6.9	3.27 V	158	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.2 PK			1.30 H	56	108.0	7.2
2	*6855.00	104.8 AV			1.30 H	56	97.6	7.2
3	#13710.00	50.6 PK	88.2	-37.6	3.77 H	113	35.4	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.77 H	113	23.4	15.2
5	20565.00	55.7 PK	74.0	-18.3	3.55 H	347	59.0	-3.3
6	20565.00	44.3 AV	54.0	-9.7	3.55 H	347	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.0 PK			1.20 V	101	104.8	7.2
2	*6855.00	100.9 AV			1.20 V	101	93.7	7.2
3	#13710.00	54.2 PK	88.2	-34.0	3.84 V	300	39.0	15.2
4	#13710.00	42.0 AV	68.2	-26.2	3.84 V	300	26.8	15.2
5	20565.00	57.9 PK	74.0	-16.1	3.16 V	174	61.2	-3.3
6	20565.00	46.7 AV	54.0	-7.3	3.16 V	174	50.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1Tx NSS1

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.7 PK	88.2	-18.5	1.00 H	0	65.4	4.3
2	#5925.00	58.3 AV	68.2	-9.9	1.00 H	0	54.0	4.3
3	*5955.00	116.1 PK			1.13 H	299	111.6	4.5
4	*5955.00	104.9 AV			1.13 H	299	100.4	4.5
5	11910.00	51.1 PK	74.0	-22.9	3.81 H	100	38.9	12.2
6	11910.00	38.6 AV	54.0	-15.4	3.81 H	100	26.4	12.2
7	17865.00	55.1 PK	74.0	-18.9	3.54 H	326	33.2	21.9
8	17865.00	44.0 AV	54.0	-10.0	3.54 H	326	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.0 PK	88.2	-16.2	1.07 V	287	67.7	4.3
2	#5925.00	58.7 AV	68.2	-9.5	1.07 V	287	54.4	4.3
3	*5955.00	113.0 PK			1.07 V	287	108.5	4.5
4	*5955.00	101.7 AV			1.07 V	287	97.2	4.5
5	11910.00	53.7 PK	74.0	-20.3	3.84 V	323	41.5	12.2
6	11910.00	41.5 AV	54.0	-12.5	3.84 V	323	29.3	12.2
7	17865.00	57.8 PK	74.0	-16.2	3.22 V	169	35.9	21.9
8	17865.00	46.7 AV	54.0	-7.3	3.22 V	169	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.5 PK			3.33 H	246	111.7	4.8
2	*6195.00	105.1 AV			3.33 H	246	100.3	4.8
3	12390.00	50.2 PK	74.0	-23.8	3.76 H	90	37.9	12.3
4	12390.00	38.0 AV	54.0	-16.0	3.76 H	90	25.7	12.3
5	18585.00	55.8 PK	74.0	-18.2	3.51 H	317	60.8	-5.0
6	18585.00	44.7 AV	54.0	-9.3	3.51 H	317	49.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.7 PK			1.17 V	99	109.9	4.8
2	*6195.00	104.4 AV			1.17 V	99	99.6	4.8
3	12390.00	54.4 PK	74.0	-19.6	3.84 V	314	42.1	12.3
4	12390.00	42.0 AV	54.0	-12.0	3.84 V	314	29.7	12.3
5	18585.00	58.1 PK	74.0	-15.9	3.23 V	158	63.1	-5.0
6	18585.00	47.2 AV	54.0	-6.8	3.23 V	158	52.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			1.06 H	211	110.8	6.4
2	*6415.00	105.6 AV			1.06 H	211	99.2	6.4
3	#12830.00	50.4 PK	88.2	-37.8	3.77 H	109	37.4	13.0
4	#12830.00	38.5 AV	68.2	-29.7	3.77 H	109	25.5	13.0
5	19245.00	55.7 PK	74.0	-18.3	3.59 H	331	59.5	-3.8
6	19245.00	44.7 AV	54.0	-9.3	3.59 H	331	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.3 PK			1.21 V	109	107.9	6.4
2	*6415.00	103.0 AV			1.21 V	109	96.6	6.4
3	#12830.00	54.0 PK	88.2	-34.2	3.90 V	329	41.0	13.0
4	#12830.00	41.7 AV	68.2	-26.5	3.90 V	329	28.7	13.0
5	19245.00	57.9 PK	74.0	-16.1	3.24 V	159	61.7	-3.8
6	19245.00	46.7 AV	54.0	-7.3	3.24 V	159	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.07 H	210	110.7	6.9
2	*6535.00	106.1 AV			1.07 H	210	99.2	6.9
3	#13070.00	50.0 PK	88.2	-38.2	3.81 H	110	36.8	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.81 H	110	24.7	13.2
5	19605.00	56.0 PK	74.0	-18.0	3.54 H	330	60.0	-4.0
6	19605.00	44.7 AV	54.0	-9.3	3.54 H	330	48.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.7 PK			1.19 V	89	107.8	6.9
2	*6535.00	104.2 AV			1.19 V	89	97.3	6.9
3	#13070.00	53.6 PK	88.2	-34.6	3.84 V	329	40.4	13.2
4	#13070.00	41.1 AV	68.2	-27.1	3.84 V	329	27.9	13.2
5	19605.00	57.7 PK	74.0	-16.3	3.20 V	179	61.7	-4.0
6	19605.00	46.5 AV	54.0	-7.5	3.20 V	179	50.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.6 PK			1.17 H	215	108.4	7.2
2	*6695.00	104.7 AV			1.17 H	215	97.5	7.2
3	13390.00	50.4 PK	74.0	-23.6	3.85 H	117	36.4	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.85 H	117	24.0	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.55 H	321	58.8	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.55 H	321	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.1 PK			1.15 V	100	107.9	7.2
2	*6695.00	104.5 AV			1.15 V	100	97.3	7.2
3	13390.00	54.0 PK	74.0	-20.0	3.82 V	309	40.0	14.0
4	13390.00	41.8 AV	54.0	-12.2	3.82 V	309	27.8	14.0
5	20085.00	58.4 PK	74.0	-15.6	3.20 V	180	61.9	-3.5
6	20085.00	47.0 AV	54.0	-7.0	3.20 V	180	50.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.2 PK			1.06 H	201	110.0	7.2
2	*6855.00	106.7 AV			1.06 H	201	99.5	7.2
3	#13710.00	50.2 PK	88.2	-38.0	3.81 H	91	35.0	15.2
4	#13710.00	38.2 AV	68.2	-30.0	3.81 H	91	23.0	15.2
5	20565.00	55.8 PK	74.0	-18.2	3.57 H	321	59.1	-3.3
6	20565.00	44.3 AV	54.0	-9.7	3.57 H	321	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.9 PK			1.17 V	94	107.7	7.2
2	*6855.00	104.4 AV			1.17 V	94	97.2	7.2
3	#13710.00	54.0 PK	88.2	-34.2	3.82 V	318	38.8	15.2
4	#13710.00	41.7 AV	68.2	-26.5	3.82 V	318	26.5	15.2
5	20565.00	57.7 PK	74.0	-16.3	3.18 V	167	61.0	-3.3
6	20565.00	46.6 AV	54.0	-7.4	3.18 V	167	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	3.82 H	100	73.1	4.3
2	#5925.00	65.4 AV	68.2	-2.8	3.82 H	100	61.1	4.3
3	*5965.00	112.6 PK			3.82 H	100	108.2	4.4
4	*5965.00	101.7 AV			3.82 H	100	97.3	4.4
5	11930.00	50.7 PK	74.0	-23.3	3.85 H	105	38.6	12.1
6	11930.00	39.6 AV	54.0	-14.4	3.85 H	105	27.5	12.1
7	17895.00	55.2 PK	74.0	-18.8	3.59 H	324	32.9	22.3
8	17895.00	45.0 AV	54.0	-9.0	3.59 H	324	22.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	3.84 V	349	69.3	4.3
2	#5925.00	59.9 AV	68.2	-8.3	3.84 V	349	55.6	4.3
3	*5965.00	110.0 PK			3.84 V	349	105.6	4.4
4	*5965.00	98.6 AV			3.84 V	349	94.2	4.4
5	11930.00	53.9 PK	74.0	-20.1	3.82 V	318	41.8	12.1
6	11930.00	41.9 AV	54.0	-12.1	3.82 V	318	29.8	12.1
7	17895.00	57.9 PK	74.0	-16.1	3.22 V	181	35.6	22.3
8	17895.00	46.9 AV	54.0	-7.1	3.22 V	181	24.6	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.9 PK			1.02 H	81	108.0	4.9
2	*6205.00	100.8 AV			1.02 H	81	95.9	4.9
3	12410.00	51.0 PK	74.0	-23.0	3.60 H	73	38.7	12.3
4	12410.00	39.1 AV	54.0	-14.9	3.60 H	73	26.8	12.3
5	18615.00	56.4 PK	74.0	-17.6	3.63 H	320	61.3	-4.9
6	18615.00	44.9 AV	54.0	-9.1	3.63 H	320	49.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	109.8 PK			1.09 V	87	104.9	4.9
2	*6205.00	98.0 AV			1.09 V	87	93.1	4.9
3	12410.00	53.8 PK	74.0	-20.2	3.86 V	301	41.5	12.3
4	12410.00	41.8 AV	54.0	-12.2	3.86 V	301	29.5	12.3
5	18615.00	57.9 PK	74.0	-16.1	3.20 V	154	62.8	-4.9
6	18615.00	46.9 AV	54.0	-7.1	3.20 V	154	51.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.1 PK			1.08 H	65	107.7	6.4
2	*6405.00	101.9 AV			1.08 H	65	95.5	6.4
3	#12810.00	50.7 PK	88.2	-37.5	3.87 H	110	37.9	12.8
4	#12810.00	38.3 AV	68.2	-29.9	3.87 H	110	25.5	12.8
5	19215.00	55.5 PK	74.0	-18.5	3.59 H	348	59.2	-3.7
6	19215.00	44.2 AV	54.0	-9.8	3.59 H	348	47.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.4 PK			1.15 V	116	104.0	6.4
2	*6405.00	98.5 AV			1.15 V	116	92.1	6.4
3	#12810.00	54.5 PK	88.2	-33.7	3.88 V	303	41.7	12.8
4	#12810.00	42.0 AV	68.2	-26.2	3.88 V	303	29.2	12.8
5	19215.00	57.5 PK	74.0	-16.5	3.20 V	174	61.2	-3.7
6	19215.00	46.6 AV	54.0	-7.4	3.20 V	174	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.6 PK			1.06 H	64	107.7	6.9
2	*6565.00	102.6 AV			1.06 H	64	95.7	6.9
3	#13130.00	51.0 PK	88.2	-37.2	3.81 H	110	37.8	13.2
4	#13130.00	38.7 AV	68.2	-29.5	3.81 H	110	25.5	13.2
5	19695.00	55.4 PK	74.0	-18.6	3.53 H	325	59.3	-3.9
6	19695.00	44.3 AV	54.0	-9.7	3.53 H	325	48.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.7 PK			1.17 V	90	103.8	6.9
2	*6565.00	98.8 AV			1.17 V	90	91.9	6.9
3	#13130.00	53.7 PK	88.2	-34.5	3.88 V	303	40.5	13.2
4	#13130.00	41.4 AV	68.2	-26.8	3.88 V	303	28.2	13.2
5	19695.00	57.4 PK	74.0	-16.6	3.26 V	176	61.3	-3.9
6	19695.00	46.5 AV	54.0	-7.5	3.26 V	176	50.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	112.9 PK			1.06 H	60	105.7	7.2
2	*6685.00	101.7 AV			1.06 H	60	94.5	7.2
3	13370.00	50.5 PK	74.0	-23.5	3.82 H	94	36.5	14.0
4	13370.00	38.0 AV	54.0	-16.0	3.82 H	94	24.0	14.0
5	20055.00	55.0 PK	74.0	-19.0	3.53 H	348	58.5	-3.5
6	20055.00	43.8 AV	54.0	-10.2	3.53 H	348	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.3 PK			1.14 V	114	103.1	7.2
2	*6685.00	98.2 AV			1.14 V	114	91.0	7.2
3	13370.00	54.3 PK	74.0	-19.7	3.82 V	326	40.3	14.0
4	13370.00	42.1 AV	54.0	-11.9	3.82 V	326	28.1	14.0
5	20055.00	58.3 PK	74.0	-15.7	3.23 V	156	61.8	-3.5
6	20055.00	47.1 AV	54.0	-6.9	3.23 V	156	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.3 PK			1.14 H	57	106.2	7.1
2	*6845.00	101.6 AV			1.14 H	57	94.5	7.1
3	#13690.00	50.0 PK	88.2	-38.2	3.86 H	112	34.9	15.1
4	#13690.00	37.8 AV	68.2	-30.4	3.86 H	112	22.7	15.1
5	20535.00	55.9 PK	74.0	-18.1	3.58 H	332	59.1	-3.2
6	20535.00	44.5 AV	54.0	-9.5	3.58 H	332	47.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.3 PK			1.14 V	101	103.2	7.1
2	*6845.00	98.4 AV			1.14 V	101	91.3	7.1
3	#13690.00	54.0 PK	88.2	-34.2	3.81 V	308	38.9	15.1
4	#13690.00	42.0 AV	68.2	-26.2	3.81 V	308	26.9	15.1
5	20535.00	58.2 PK	74.0	-15.8	3.23 V	174	61.4	-3.2
6	20535.00	46.8 AV	54.0	-7.2	3.23 V	174	50.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	1.00 H	0	72.0	4.3
2	#5925.00	65.0 AV	68.2	-3.2	1.00 H	0	60.7	4.3
3	*5985.00	107.9 PK			1.11 H	296	103.5	4.4
4	*5985.00	96.6 AV			1.11 H	296	92.2	4.4
5	11970.00	50.8 PK	74.0	-23.2	3.78 H	88	38.6	12.2
6	11970.00	38.6 AV	54.0	-15.4	3.78 H	88	26.4	12.2
7	17955.00	55.4 PK	74.0	-18.6	3.56 H	326	32.0	23.4
8	17955.00	44.3 AV	54.0	-9.7	3.56 H	326	20.9	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	3.47 V	341	72.2	4.3
2	#5925.00	64.0 AV	68.2	-4.2	3.47 V	341	59.7	4.3
3	*5985.00	105.9 PK			3.47 V	341	101.5	4.4
4	*5985.00	94.9 AV			3.47 V	341	90.5	4.4
5	11970.00	54.1 PK	74.0	-19.9	3.90 V	307	41.9	12.2
6	11970.00	41.9 AV	54.0	-12.1	3.90 V	307	29.7	12.2
7	17955.00	58.0 PK	74.0	-16.0	3.18 V	170	34.6	23.4
8	17955.00	46.9 AV	54.0	-7.1	3.18 V	170	23.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.8 PK			3.31 H	250	105.8	5.0
2	*6225.00	99.8 AV			3.31 H	250	94.8	5.0
3	12450.00	50.6 PK	74.0	-23.4	3.82 H	108	38.3	12.3
4	12450.00	38.2 AV	54.0	-15.8	3.82 H	108	25.9	12.3
5	18675.00	55.8 PK	74.0	-18.2	3.56 H	333	60.7	-4.9
6	18675.00	44.7 AV	54.0	-9.3	3.56 H	333	49.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.8 PK			1.14 V	106	104.8	5.0
2	*6225.00	96.7 AV			1.14 V	106	91.7	5.0
3	12450.00	54.2 PK	74.0	-19.8	3.81 V	331	41.9	12.3
4	12450.00	42.0 AV	54.0	-12.0	3.81 V	331	29.7	12.3
5	18675.00	57.8 PK	74.0	-16.2	3.17 V	164	62.7	-4.9
6	18675.00	46.4 AV	54.0	-7.6	3.17 V	164	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.1 PK			3.72 H	244	104.9	6.2
2	*6385.00	99.9 AV			3.72 H	244	93.7	6.2
3	#12770.00	50.8 PK	88.2	-37.4	3.75 H	107	38.0	12.8
4	#12770.00	38.3 AV	68.2	-29.9	3.75 H	107	25.5	12.8
5	19155.00	55.7 PK	74.0	-18.3	3.52 H	325	59.5	-3.8
6	19155.00	44.5 AV	54.0	-9.5	3.52 H	325	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.0 PK			1.17 V	117	102.8	6.2
2	*6385.00	96.1 AV			1.17 V	117	89.9	6.2
3	#12770.00	53.5 PK	88.2	-34.7	3.81 V	329	40.7	12.8
4	#12770.00	41.3 AV	68.2	-26.9	3.81 V	329	28.5	12.8
5	19155.00	58.3 PK	74.0	-15.7	3.17 V	184	62.1	-3.8
6	19155.00	47.3 AV	54.0	-6.7	3.17 V	184	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.5 PK			3.34 H	247	104.6	6.9
2	*6625.00	99.9 AV			3.34 H	247	93.0	6.9
3	13250.00	50.2 PK	74.0	-23.8	3.77 H	100	36.6	13.6
4	13250.00	37.8 AV	54.0	-16.2	3.77 H	100	24.2	13.6
5	19875.00	55.4 PK	74.0	-18.6	3.53 H	342	58.9	-3.5
6	19875.00	44.2 AV	54.0	-9.8	3.53 H	342	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.8 PK			1.17 V	100	102.9	6.9
2	*6625.00	96.7 AV			1.17 V	100	89.8	6.9
3	13250.00	54.1 PK	74.0	-19.9	3.80 V	329	40.5	13.6
4	13250.00	41.7 AV	54.0	-12.3	3.80 V	329	28.1	13.6
5	19875.00	58.2 PK	74.0	-15.8	3.20 V	163	61.7	-3.5
6	19875.00	46.8 AV	54.0	-7.2	3.20 V	163	50.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.9 PK			1.10 H	201	103.7	7.2
2	*6705.00	99.3 AV			1.10 H	201	92.1	7.2
3	#13410.00	51.1 PK	88.2	-37.1	3.86 H	97	36.9	14.2
4	#13410.00	38.6 AV	68.2	-29.6	3.86 H	97	24.4	14.2
5	20115.00	55.5 PK	74.0	-18.5	3.56 H	318	59.0	-3.5
6	20115.00	44.0 AV	54.0	-10.0	3.56 H	318	47.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.8 PK			1.13 V	89	102.6	7.2
2	*6705.00	96.9 AV			1.13 V	89	89.7	7.2
3	#13410.00	53.8 PK	88.2	-34.4	3.86 V	321	39.6	14.2
4	#13410.00	41.5 AV	68.2	-26.7	3.86 V	321	27.3	14.2
5	20115.00	58.4 PK	74.0	-15.6	3.27 V	172	61.9	-3.5
6	20115.00	47.2 AV	54.0	-6.8	3.27 V	172	50.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.1 PK			1.09 H	200	106.1	7.0
2	*6785.00	100.4 AV			1.09 H	200	93.4	7.0
3	#13570.00	50.2 PK	88.2	-38.0	3.81 H	87	35.6	14.6
4	#13570.00	38.0 AV	68.2	-30.2	3.81 H	87	23.4	14.6
5	20355.00	56.0 PK	74.0	-18.0	3.52 H	335	59.1	-3.1
6	20355.00	44.6 AV	54.0	-9.4	3.52 H	335	47.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.4 PK			1.14 V	103	102.4	7.0
2	*6785.00	96.6 AV			1.14 V	103	89.6	7.0
3	#13570.00	54.2 PK	88.2	-34.0	3.86 V	316	39.6	14.6
4	#13570.00	41.7 AV	68.2	-26.5	3.86 V	316	27.1	14.6
5	20355.00	58.0 PK	74.0	-16.0	3.20 V	177	61.1	-3.1
6	20355.00	47.0 AV	54.0	-7.0	3.20 V	177	50.1	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.6 PK	88.2	-11.6	1.00 H	0	72.3	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.00 H	0	60.8	4.3
3	*6025.00	106.4 PK			1.07 H	243	102.2	4.2
4	*6025.00	94.6 AV			1.07 H	243	90.4	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.83 H	113	38.4	12.4
6	12050.00	38.6 AV	54.0	-15.4	3.83 H	113	26.2	12.4
7	18075.00	55.2 PK	74.0	-18.8	3.59 H	347	59.9	-4.7
8	18075.00	43.8 AV	54.0	-10.2	3.59 H	347	48.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	3.46 V	340	72.2	4.3
2	#5925.00	61.1 AV	68.2	-7.1	3.46 V	340	56.8	4.3
3	*6025.00	103.1 PK			3.46 V	340	98.9	4.2
4	*6025.00	91.7 AV			3.46 V	340	87.5	4.2
5	12050.00	53.6 PK	74.0	-20.4	3.81 V	315	41.2	12.4
6	12050.00	41.6 AV	54.0	-12.4	3.81 V	315	29.2	12.4
7	18075.00	57.7 PK	74.0	-16.3	3.27 V	171	62.4	-4.7
8	18075.00	46.4 AV	54.0	-7.6	3.27 V	171	51.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.9 PK			1.05 H	81	104.1	4.8
2	*6185.00	97.2 AV			1.05 H	81	92.4	4.8
3	12370.00	50.5 PK	74.0	-23.5	3.85 H	90	38.2	12.3
4	12370.00	38.1 AV	54.0	-15.9	3.85 H	90	25.8	12.3
5	18555.00	55.3 PK	74.0	-18.7	3.55 H	322	60.2	-4.9
6	18555.00	44.2 AV	54.0	-9.8	3.55 H	322	49.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	104.8 PK			1.17 V	87	100.0	4.8
2	*6185.00	93.3 AV			1.17 V	87	88.5	4.8
3	12370.00	53.4 PK	74.0	-20.6	3.84 V	305	41.1	12.3
4	12370.00	41.5 AV	54.0	-12.5	3.84 V	305	29.2	12.3
5	18555.00	57.7 PK	74.0	-16.3	3.23 V	178	62.6	-4.9
6	18555.00	46.4 AV	54.0	-7.6	3.23 V	178	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.9 PK			1.17 H	68	101.8	6.1
2	*6345.00	96.3 AV			1.17 H	68	90.2	6.1
3	12690.00	50.6 PK	74.0	-23.4	3.81 H	111	37.7	12.9
4	12690.00	38.4 AV	54.0	-15.6	3.81 H	111	25.5	12.9
5	19035.00	55.0 PK	74.0	-19.0	3.59 H	329	58.9	-3.9
6	19035.00	44.1 AV	54.0	-9.9	3.59 H	329	48.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.7 PK			1.16 V	96	98.6	6.1
2	*6345.00	93.0 AV			1.16 V	96	86.9	6.1
3	12690.00	53.6 PK	74.0	-20.4	3.92 V	324	40.7	12.9
4	12690.00	41.3 AV	54.0	-12.7	3.92 V	324	28.4	12.9
5	19035.00	57.5 PK	74.0	-16.5	3.24 V	178	61.4	-3.9
6	19035.00	46.5 AV	54.0	-7.5	3.24 V	178	50.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.8 PK			1.07 H	62	100.6	7.2
2	*6665.00	95.8 AV			1.07 H	62	88.6	7.2
3	13330.00	50.2 PK	74.0	-23.8	3.79 H	105	36.4	13.8
4	13330.00	38.2 AV	54.0	-15.8	3.79 H	105	24.4	13.8
5	19995.00	55.6 PK	74.0	-18.4	3.49 H	332	59.2	-3.6
6	19995.00	44.5 AV	54.0	-9.5	3.49 H	332	48.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.4 PK			1.21 V	92	98.2	7.2
2	*6665.00	94.5 AV			1.21 V	92	87.3	7.2
3	13330.00	53.2 PK	74.0	-20.8	3.84 V	313	39.4	13.8
4	13330.00	41.2 AV	54.0	-12.8	3.84 V	313	27.4	13.8
5	19995.00	58.3 PK	74.0	-15.7	3.22 V	174	61.9	-3.6
6	19995.00	47.1 AV	54.0	-6.9	3.22 V	174	50.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	1.00 H	0	65.8	4.3
2	#5925.00	50.3 AV	68.2	-17.9	1.00 H	0	46.0	4.3
3	*5955.00	121.1 PK			1.10 H	245	116.6	4.5
4	*5955.00	112.8 AV			1.10 H	245	108.3	4.5
5	11910.00	50.2 PK	74.0	-23.8	3.57 H	83	38.0	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.57 H	83	26.5	12.2
7	17865.00	55.3 PK	74.0	-18.7	3.54 H	296	33.4	21.9
8	17865.00	44.1 AV	54.0	-9.9	3.54 H	296	22.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.8 PK	88.2	-20.4	1.15 V	105	63.5	4.3
2	#5925.00	49.2 AV	68.2	-19.0	1.15 V	105	44.9	4.3
3	*5955.00	119.6 PK			1.15 V	105	115.1	4.5
4	*5955.00	111.2 AV			1.15 V	105	106.7	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.90 V	321	41.6	12.2
6	11910.00	41.5 AV	54.0	-12.5	3.90 V	321	29.3	12.2
7	17865.00	57.9 PK	74.0	-16.1	3.23 V	157	36.0	21.9
8	17865.00	47.0 AV	54.0	-7.0	3.23 V	157	25.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.6 PK			1.07 H	63	117.8	4.8
2	*6195.00	113.9 AV			1.07 H	63	109.1	4.8
3	12390.00	50.6 PK	74.0	-23.4	3.76 H	61	38.3	12.3
4	12390.00	39.2 AV	54.0	-14.8	3.76 H	61	26.9	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.40 H	307	60.2	-5.0
6	18585.00	44.2 AV	54.0	-9.8	3.40 H	307	49.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.0 PK			3.60 V	360	113.2	4.8
2	*6195.00	112.6 AV			3.60 V	360	107.8	4.8
3	12390.00	53.8 PK	74.0	-20.2	3.90 V	312	41.5	12.3
4	12390.00	41.4 AV	54.0	-12.6	3.90 V	312	29.1	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.22 V	175	62.4	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.22 V	175	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.1 PK			1.10 H	65	116.7	6.4
2	*6415.00	115.5 AV			1.10 H	65	109.1	6.4
3	#12830.00	51.1 PK	88.2	-37.1	3.87 H	82	38.1	13.0
4	#12830.00	39.7 AV	68.2	-28.5	3.87 H	82	26.7	13.0
5	19245.00	55.4 PK	74.0	-18.6	3.54 H	318	59.2	-3.8
6	19245.00	43.4 AV	54.0	-10.6	3.54 H	318	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.4 PK			3.64 V	360	112.0	6.4
2	*6415.00	112.6 AV			3.64 V	360	106.2	6.4
3	#12830.00	53.4 PK	88.2	-34.8	3.81 V	323	40.4	13.0
4	#12830.00	41.3 AV	68.2	-26.9	3.81 V	323	28.3	13.0
5	19245.00	58.2 PK	74.0	-15.8	3.27 V	165	62.0	-3.8
6	19245.00	47.3 AV	54.0	-6.7	3.27 V	165	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.1 PK			1.05 H	65	117.2	6.9
2	*6535.00	117.6 AV			1.05 H	65	110.7	6.9
3	#13070.00	51.2 PK	88.2	-37.0	3.79 H	109	38.0	13.2
4	#13070.00	39.5 AV	68.2	-28.7	3.79 H	109	26.3	13.2
5	19605.00	56.2 PK	74.0	-17.8	3.62 H	300	60.2	-4.0
6	19605.00	45.1 AV	54.0	-8.9	3.62 H	300	49.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			3.60 V	360	111.2	6.9
2	*6535.00	112.4 AV			3.60 V	360	105.5	6.9
3	#13070.00	54.1 PK	88.2	-34.1	3.83 V	321	40.9	13.2
4	#13070.00	41.8 AV	68.2	-26.4	3.83 V	321	28.6	13.2
5	19605.00	58.3 PK	74.0	-15.7	3.18 V	172	62.3	-4.0
6	19605.00	47.3 AV	54.0	-6.7	3.18 V	172	51.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			1.02 H	61	114.6	7.2
2	*6695.00	115.3 AV			1.02 H	61	108.1	7.2
3	13390.00	50.7 PK	74.0	-23.3	3.72 H	90	36.7	14.0
4	13390.00	39.4 AV	54.0	-14.6	3.72 H	90	25.4	14.0
5	20085.00	55.0 PK	74.0	-19.0	3.81 H	305	58.5	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.81 H	305	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.9 PK			3.61 V	350	110.7	7.2
2	*6695.00	112.6 AV			3.61 V	350	105.4	7.2
3	13390.00	53.3 PK	74.0	-20.7	3.82 V	320	39.3	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.82 V	320	27.2	14.0
5	20085.00	58.3 PK	74.0	-15.7	3.18 V	166	61.8	-3.5
6	20085.00	47.0 AV	54.0	-7.0	3.18 V	166	50.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.2 PK			1.31 H	56	115.0	7.2
2	*6855.00	115.9 AV			1.31 H	56	108.7	7.2
3	#13710.00	51.1 PK	88.2	-37.1	3.83 H	100	35.9	15.2
4	#13710.00	38.4 AV	68.2	-29.8	3.83 H	100	23.2	15.2
5	20565.00	55.7 PK	74.0	-18.3	3.51 H	295	59.0	-3.3
6	20565.00	44.6 AV	54.0	-9.4	3.51 H	295	47.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			3.60 V	360	111.2	7.2
2	*6855.00	112.8 AV			3.60 V	360	105.6	7.2
3	#13710.00	53.7 PK	88.2	-34.5	3.87 V	315	38.5	15.2
4	#13710.00	41.8 AV	68.2	-26.4	3.87 V	315	26.6	15.2
5	20565.00	58.5 PK	74.0	-15.5	3.25 V	183	61.8	-3.3
6	20565.00	47.2 AV	54.0	-6.8	3.25 V	183	50.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.8 PK	88.2	-13.4	1.00 H	0	70.5	4.3
2	#5925.00	52.1 AV	68.2	-16.1	1.00 H	0	47.8	4.3
3	*5955.00	119.8 PK			1.04 H	245	115.3	4.5
4	*5955.00	110.8 AV			1.04 H	245	106.3	4.5
5	11910.00	49.9 PK	74.0	-24.1	3.92 H	83	37.7	12.2
6	11910.00	39.1 AV	54.0	-14.9	3.92 H	83	26.9	12.2
7	17865.00	55.3 PK	74.0	-18.7	3.82 H	332	33.4	21.9
8	17865.00	43.8 AV	54.0	-10.2	3.82 H	332	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.7 PK	88.2	-16.5	3.54 V	339	67.4	4.3
2	#5925.00	51.4 AV	68.2	-16.8	3.54 V	339	47.1	4.3
3	*5955.00	118.5 PK			3.54 V	339	114.0	4.5
4	*5955.00	109.4 AV			3.54 V	339	104.9	4.5
5	11910.00	54.0 PK	74.0	-20.0	3.87 V	301	41.8	12.2
6	11910.00	41.6 AV	54.0	-12.4	3.87 V	301	29.4	12.2
7	17865.00	57.6 PK	74.0	-16.4	3.23 V	156	35.7	21.9
8	17865.00	46.6 AV	54.0	-7.4	3.23 V	156	24.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			1.04 H	249	116.1	4.8
2	*6195.00	112.1 AV			1.04 H	249	107.3	4.8
3	12390.00	50.9 PK	74.0	-23.1	3.70 H	110	38.6	12.3
4	12390.00	38.1 AV	54.0	-15.9	3.70 H	110	25.8	12.3
5	18585.00	54.6 PK	74.0	-19.4	3.65 H	308	59.6	-5.0
6	18585.00	44.0 AV	54.0	-10.0	3.65 H	308	49.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.5 PK			3.57 V	344	113.7	4.8
2	*6195.00	109.2 AV			3.57 V	344	104.4	4.8
3	12390.00	53.9 PK	74.0	-20.1	3.85 V	310	41.6	12.3
4	12390.00	42.0 AV	54.0	-12.0	3.85 V	310	29.7	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.24 V	178	62.4	-5.0
6	18585.00	46.5 AV	54.0	-7.5	3.24 V	178	51.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			1.02 H	233	116.3	6.4
2	*6415.00	114.6 AV			1.02 H	233	108.2	6.4
3	#12830.00	50.7 PK	88.2	-37.5	3.72 H	79	37.7	13.0
4	#12830.00	39.3 AV	68.2	-28.9	3.72 H	79	26.3	13.0
5	19245.00	55.6 PK	74.0	-18.4	3.56 H	304	59.4	-3.8
6	19245.00	44.0 AV	54.0	-10.0	3.56 H	304	47.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.7 PK			3.58 V	343	112.3	6.4
2	*6415.00	109.7 AV			3.58 V	343	103.3	6.4
3	#12830.00	53.6 PK	88.2	-34.6	3.86 V	323	40.6	13.0
4	#12830.00	41.1 AV	68.2	-27.1	3.86 V	323	28.1	13.0
5	19245.00	57.5 PK	74.0	-16.5	3.24 V	173	61.3	-3.8
6	19245.00	46.6 AV	54.0	-7.4	3.24 V	173	50.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.7 PK			1.07 H	248	116.8	6.9
2	*6535.00	116.1 AV			1.07 H	248	109.2	6.9
3	#13070.00	50.9 PK	88.2	-37.3	3.55 H	103	37.7	13.2
4	#13070.00	38.6 AV	68.2	-29.6	3.55 H	103	25.4	13.2
5	19605.00	56.3 PK	74.0	-17.7	3.75 H	309	60.3	-4.0
6	19605.00	44.8 AV	54.0	-9.2	3.75 H	309	48.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.4 PK			3.49 V	323	111.5	6.9
2	*6535.00	109.0 AV			3.49 V	323	102.1	6.9
3	#13070.00	53.5 PK	88.2	-34.7	3.88 V	315	40.3	13.2
4	#13070.00	41.3 AV	68.2	-26.9	3.88 V	315	28.1	13.2
5	19605.00	57.9 PK	74.0	-16.1	3.24 V	180	61.9	-4.0
6	19605.00	46.7 AV	54.0	-7.3	3.24 V	180	50.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.8 PK			1.08 H	244	115.6	7.2
2	*6695.00	113.7 AV			1.08 H	244	106.5	7.2
3	13390.00	51.6 PK	74.0	-22.4	3.66 H	114	37.6	14.0
4	13390.00	38.9 AV	54.0	-15.1	3.66 H	114	24.9	14.0
5	20085.00	55.9 PK	74.0	-18.1	3.65 H	327	59.4	-3.5
6	20085.00	44.6 AV	54.0	-9.4	3.65 H	327	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.6 PK			3.50 V	342	111.4	7.2
2	*6695.00	109.7 AV			3.50 V	342	102.5	7.2
3	13390.00	53.6 PK	74.0	-20.4	3.80 V	319	39.6	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.80 V	319	27.2	14.0
5	20085.00	57.7 PK	74.0	-16.3	3.22 V	180	61.2	-3.5
6	20085.00	46.8 AV	54.0	-7.2	3.22 V	180	50.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.2 PK			1.30 H	56	115.0	7.2
2	*6855.00	114.1 AV			1.30 H	56	106.9	7.2
3	#13710.00	51.5 PK	88.2	-36.7	3.86 H	122	36.3	15.2
4	#13710.00	39.9 AV	68.2	-28.3	3.86 H	122	24.7	15.2
5	20565.00	55.2 PK	74.0	-18.8	3.48 H	284	58.5	-3.3
6	20565.00	44.1 AV	54.0	-9.9	3.48 H	284	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			3.56 V	349	111.2	7.2
2	*6855.00	109.4 AV			3.56 V	349	102.2	7.2
3	#13710.00	53.9 PK	88.2	-34.3	3.88 V	301	38.7	15.2
4	#13710.00	41.7 AV	68.2	-26.5	3.88 V	301	26.5	15.2
5	20565.00	57.9 PK	74.0	-16.1	3.17 V	180	61.2	-3.3
6	20565.00	46.6 AV	54.0	-7.4	3.17 V	180	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.0 PK	88.2	-14.2	1.07 H	244	69.7	4.3
2	#5925.00	56.1 AV	68.2	-12.1	1.07 H	244	51.8	4.3
3	*5955.00	118.6 PK			1.07 H	244	114.1	4.5
4	*5955.00	108.5 AV			1.07 H	244	104.0	4.5
5	11910.00	51.4 PK	74.0	-22.6	3.82 H	80	39.2	12.2
6	11910.00	39.3 AV	54.0	-14.7	3.82 H	80	27.1	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.64 H	310	32.9	21.9
8	17865.00	43.8 AV	54.0	-10.2	3.64 H	310	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.9 PK	88.2	-21.3	3.38 V	342	62.6	4.3
2	#5925.00	51.4 AV	68.2	-16.8	3.38 V	342	47.1	4.3
3	*5955.00	117.8 PK			3.38 V	342	113.3	4.5
4	*5955.00	106.8 AV			3.38 V	342	102.3	4.5
5	11910.00	53.5 PK	74.0	-20.5	3.89 V	329	41.3	12.2
6	11910.00	41.2 AV	54.0	-12.8	3.89 V	329	29.0	12.2
7	17865.00	57.7 PK	74.0	-16.3	3.20 V	163	35.8	21.9
8	17865.00	46.7 AV	54.0	-7.3	3.20 V	163	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.09 H	253	114.7	4.8
2	*6195.00	110.1 AV			1.09 H	253	105.3	4.8
3	12390.00	50.8 PK	74.0	-23.2	3.62 H	86	38.5	12.3
4	12390.00	38.9 AV	54.0	-15.1	3.62 H	86	26.6	12.3
5	18585.00	56.6 PK	74.0	-17.4	3.52 H	298	61.6	-5.0
6	18585.00	44.0 AV	54.0	-10.0	3.52 H	298	49.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.8 PK			3.38 V	337	113.0	4.8
2	*6195.00	106.6 AV			3.38 V	337	101.8	4.8
3	12390.00	54.2 PK	74.0	-19.8	3.92 V	316	41.9	12.3
4	12390.00	41.9 AV	54.0	-12.1	3.92 V	316	29.6	12.3
5	18585.00	57.5 PK	74.0	-16.5	3.26 V	161	62.5	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.26 V	161	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			1.03 H	258	113.9	6.4
2	*6415.00	112.4 AV			1.03 H	258	106.0	6.4
3	#12830.00	50.8 PK	88.2	-37.4	3.63 H	77	37.8	13.0
4	#12830.00	38.7 AV	68.2	-29.5	3.63 H	77	25.7	13.0
5	19245.00	54.6 PK	74.0	-19.4	3.78 H	305	58.4	-3.8
6	19245.00	43.4 AV	54.0	-10.6	3.78 H	305	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			3.39 V	358	110.8	6.4
2	*6415.00	106.3 AV			3.39 V	358	99.9	6.4
3	#12830.00	53.8 PK	88.2	-34.4	3.86 V	325	40.8	13.0
4	#12830.00	41.3 AV	68.2	-26.9	3.86 V	325	28.3	13.0
5	19245.00	57.9 PK	74.0	-16.1	3.20 V	158	61.7	-3.8
6	19245.00	46.7 AV	54.0	-7.3	3.20 V	158	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			1.05 H	247	114.7	6.9
2	*6535.00	114.2 AV			1.05 H	247	107.3	6.9
3	#13070.00	50.1 PK	88.2	-38.1	3.79 H	113	36.9	13.2
4	#13070.00	39.1 AV	68.2	-29.1	3.79 H	113	25.9	13.2
5	19605.00	55.6 PK	74.0	-18.4	3.70 H	322	59.6	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.70 H	322	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.7 PK			3.32 V	347	110.8	6.9
2	*6535.00	106.6 AV			3.32 V	347	99.7	6.9
3	#13070.00	54.0 PK	88.2	-34.2	3.88 V	305	40.8	13.2
4	#13070.00	41.6 AV	68.2	-26.6	3.88 V	305	28.4	13.2
5	19605.00	58.1 PK	74.0	-15.9	3.20 V	178	62.1	-4.0
6	19605.00	46.8 AV	54.0	-7.2	3.20 V	178	50.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.5 PK			1.07 H	240	113.3	7.2
2	*6695.00	112.1 AV			1.07 H	240	104.9	7.2
3	13390.00	49.7 PK	74.0	-24.3	3.70 H	87	35.7	14.0
4	13390.00	39.6 AV	54.0	-14.4	3.70 H	87	25.6	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.63 H	325	58.8	-3.5
6	20085.00	45.3 AV	54.0	-8.7	3.63 H	325	48.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.7 PK			3.40 V	341	110.5	7.2
2	*6695.00	106.9 AV			3.40 V	341	99.7	7.2
3	13390.00	53.7 PK	74.0	-20.3	3.87 V	316	39.7	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.87 V	316	27.2	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.20 V	158	61.0	-3.5
6	20085.00	46.6 AV	54.0	-7.4	3.20 V	158	50.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.7 PK			1.31 H	55	113.5	7.2
2	*6855.00	111.3 AV			1.31 H	55	104.1	7.2
3	#13710.00	51.0 PK	88.2	-37.2	3.86 H	90	35.8	15.2
4	#13710.00	39.1 AV	68.2	-29.1	3.86 H	90	23.9	15.2
5	20565.00	55.5 PK	74.0	-18.5	3.65 H	335	58.8	-3.3
6	20565.00	44.7 AV	54.0	-9.3	3.65 H	335	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.3 PK			3.33 V	329	110.1	7.2
2	*6855.00	106.6 AV			3.33 V	329	99.4	7.2
3	#13710.00	53.6 PK	88.2	-34.6	3.85 V	329	38.4	15.2
4	#13710.00	41.2 AV	68.2	-27.0	3.85 V	329	26.0	15.2
5	20565.00	58.1 PK	74.0	-15.9	3.18 V	181	61.4	-3.3
6	20565.00	47.1 AV	54.0	-6.9	3.18 V	181	50.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.1 PK	88.2	-15.1	1.08 H	245	68.8	4.3
2	#5925.00	49.9 AV	68.2	-18.3	1.08 H	245	45.6	4.3
3	*5955.00	120.2 PK			1.08 H	245	115.7	4.5
4	*5955.00	109.3 AV			1.08 H	245	104.8	4.5
5	11910.00	50.8 PK	74.0	-23.2	3.63 H	109	38.6	12.2
6	11910.00	39.0 AV	54.0	-15.0	3.63 H	109	26.8	12.2
7	17865.00	55.0 PK	74.0	-19.0	3.77 H	304	33.1	21.9
8	17865.00	44.6 AV	54.0	-9.4	3.77 H	304	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.3 PK	88.2	-17.9	3.51 V	346	66.0	4.3
2	#5925.00	48.6 AV	68.2	-19.6	3.51 V	346	44.3	4.3
3	*5955.00	118.7 PK			3.51 V	346	114.2	4.5
4	*5955.00	108.5 AV			3.51 V	346	104.0	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.85 V	314	41.6	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.85 V	314	29.6	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.23 V	169	35.3	21.9
8	17865.00	46.4 AV	54.0	-7.6	3.23 V	169	24.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.9 PK			1.12 H	255	112.7	7.2
2	*6695.00	109.0 AV			1.12 H	255	101.8	7.2
3	13390.00	50.8 PK	74.0	-23.2	3.64 H	100	36.8	14.0
4	13390.00	38.9 AV	54.0	-15.1	3.64 H	100	24.9	14.0
5	20085.00	55.2 PK	74.0	-18.8	3.81 H	289	58.7	-3.5
6	20085.00	45.0 AV	54.0	-9.0	3.81 H	289	48.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.8 PK			3.55 V	352	111.6	7.2
2	*6695.00	108.6 AV			3.55 V	352	101.4	7.2
3	13390.00	53.6 PK	74.0	-20.4	3.82 V	299	39.6	14.0
4	13390.00	41.4 AV	54.0	-12.6	3.82 V	299	27.4	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.21 V	177	61.0	-3.5
6	20085.00	46.9 AV	54.0	-7.1	3.21 V	177	50.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.06 H	244	69.4	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.06 H	244	53.6	4.3
3	*5955.00	117.8 PK			1.06 H	244	113.3	4.5
4	*5955.00	107.0 AV			1.06 H	244	102.5	4.5
5	11910.00	50.4 PK	74.0	-23.6	3.82 H	94	38.2	12.2
6	11910.00	39.2 AV	54.0	-14.8	3.82 H	94	27.0	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.43 H	343	32.9	21.9
8	17865.00	43.9 AV	54.0	-10.1	3.43 H	343	22.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	3.51 V	345	63.7	4.3
2	#5925.00	53.3 AV	68.2	-14.9	3.51 V	345	49.0	4.3
3	*5955.00	116.5 PK			3.51 V	345	112.0	4.5
4	*5955.00	105.6 AV			3.51 V	345	101.1	4.5
5	11910.00	53.5 PK	74.0	-20.5	3.90 V	311	41.3	12.2
6	11910.00	41.2 AV	54.0	-12.8	3.90 V	311	29.0	12.2
7	17865.00	58.0 PK	74.0	-16.0	3.24 V	166	36.1	21.9
8	17865.00	47.2 AV	54.0	-6.8	3.24 V	166	25.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.1 PK			1.00 H	243	109.9	7.2
2	*6695.00	106.6 AV			1.00 H	243	99.4	7.2
3	13390.00	50.8 PK	74.0	-23.2	3.81 H	90	36.8	14.0
4	13390.00	39.6 AV	54.0	-14.4	3.81 H	90	25.6	14.0
5	20085.00	55.1 PK	74.0	-18.9	3.46 H	334	58.6	-3.5
6	20085.00	43.9 AV	54.0	-10.1	3.46 H	334	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.3 PK			3.45 V	338	109.1	7.2
2	*6695.00	105.4 AV			3.45 V	338	98.2	7.2
3	13390.00	53.3 PK	74.0	-20.7	3.85 V	297	39.3	14.0
4	13390.00	41.3 AV	54.0	-12.7	3.85 V	297	27.3	14.0
5	20085.00	58.0 PK	74.0	-16.0	3.26 V	153	61.5	-3.5
6	20085.00	47.2 AV	54.0	-6.8	3.26 V	153	50.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	1.07 H	245	74.9	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.07 H	245	62.3	4.3
3	*5985.00	110.4 PK			1.07 H	245	106.0	4.4
4	*5985.00	98.1 AV			1.07 H	245	93.7	4.4
5	11970.00	50.3 PK	74.0	-23.7	3.62 H	102	38.1	12.2
6	11970.00	39.4 AV	54.0	-14.6	3.62 H	102	27.2	12.2
7	17955.00	55.7 PK	74.0	-18.3	3.69 H	309	32.3	23.4
8	17955.00	43.8 AV	54.0	-10.2	3.69 H	309	20.4	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	3.32 V	337	69.3	4.3
2	#5925.00	59.6 AV	68.2	-8.6	3.32 V	337	55.3	4.3
3	*5985.00	106.1 PK			3.32 V	337	101.7	4.4
4	*5985.00	95.1 AV			3.32 V	337	90.7	4.4
5	11970.00	53.2 PK	74.0	-20.8	3.90 V	311	41.0	12.2
6	11970.00	41.2 AV	54.0	-12.8	3.90 V	311	29.0	12.2
7	17955.00	57.4 PK	74.0	-16.6	3.19 V	186	34.0	23.4
8	17955.00	46.3 AV	54.0	-7.7	3.19 V	186	22.9	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.0 PK			1.01 H	248	102.8	7.2
2	*6705.00	97.6 AV			1.01 H	248	90.4	7.2
3	#13410.00	50.1 PK	88.2	-38.1	3.66 H	92	35.9	14.2
4	#13410.00	39.4 AV	68.2	-28.8	3.66 H	92	25.2	14.2
5	20115.00	55.8 PK	74.0	-18.2	3.74 H	315	59.3	-3.5
6	20115.00	44.2 AV	54.0	-9.8	3.74 H	315	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.6 PK			3.38 V	344	98.4	7.2
2	*6705.00	94.8 AV			3.38 V	344	87.6	7.2
3	#13410.00	53.2 PK	88.2	-35.0	3.92 V	308	39.0	14.2
4	#13410.00	41.3 AV	68.2	-26.9	3.92 V	308	27.1	14.2
5	20115.00	57.9 PK	74.0	-16.1	3.20 V	182	61.4	-3.5
6	20115.00	46.7 AV	54.0	-7.3	3.20 V	182	50.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	3.61 H	89	72.9	4.3
2	#5925.00	62.5 AV	68.2	-5.7	3.61 H	89	58.2	4.3
3	*6025.00	107.3 PK			3.61 H	89	103.1	4.2
4	*6025.00	94.9 AV			3.61 H	89	90.7	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.80 H	105	38.4	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.80 H	105	26.4	12.4
7	18075.00	56.1 PK	74.0	-17.9	3.50 H	323	60.8	-4.7
8	18075.00	44.8 AV	54.0	-9.2	3.50 H	323	49.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.8 PK	88.2	-16.4	3.47 V	340	67.5	4.3
2	#5925.00	56.1 AV	68.2	-12.1	3.47 V	340	51.8	4.3
3	*6025.00	103.7 PK			3.47 V	340	99.5	4.2
4	*6025.00	92.0 AV			3.47 V	340	87.8	4.2
5	12050.00	53.9 PK	74.0	-20.1	3.88 V	327	41.5	12.4
6	12050.00	41.5 AV	54.0	-12.5	3.88 V	327	29.1	12.4
7	18075.00	58.4 PK	74.0	-15.6	3.20 V	172	63.1	-4.7
8	18075.00	47.3 AV	54.0	-6.7	3.20 V	172	52.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.2 PK			3.60 H	98	100.0	7.2
2	*6665.00	95.0 AV			3.60 H	98	87.8	7.2
3	13330.00	50.8 PK	74.0	-23.2	3.74 H	114	37.0	13.8
4	13330.00	38.9 AV	54.0	-15.1	3.74 H	114	25.1	13.8
5	19995.00	55.8 PK	74.0	-18.2	3.55 H	312	59.4	-3.6
6	19995.00	44.7 AV	54.0	-9.3	3.55 H	312	48.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.0 PK			3.51 V	339	96.8	7.2
2	*6665.00	92.1 AV			3.51 V	339	84.9	7.2
3	13330.00	53.9 PK	74.0	-20.1	3.86 V	332	40.1	13.8
4	13330.00	41.4 AV	54.0	-12.6	3.86 V	332	27.6	13.8
5	19995.00	58.1 PK	74.0	-15.9	3.15 V	183	61.7	-3.6
6	19995.00	47.1 AV	54.0	-6.9	3.15 V	183	50.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.2 PK	88.2	-7.0	3.61 H	91	76.9	4.3
2	#5925.00	64.7 AV	68.2	-3.5	3.61 H	91	60.4	4.3
3	*6025.00	106.3 PK			3.61 H	91	102.1	4.2
4	*6025.00	94.7 AV			3.61 H	91	90.5	4.2
5	12050.00	50.7 PK	74.0	-23.3	3.83 H	115	38.3	12.4
6	12050.00	38.3 AV	54.0	-15.7	3.83 H	115	25.9	12.4
7	18075.00	56.0 PK	74.0	-18.0	3.60 H	332	60.7	-4.7
8	18075.00	44.6 AV	54.0	-9.4	3.60 H	332	49.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.1 PK	88.2	-15.1	3.48 V	342	68.8	4.3
2	#5925.00	58.0 AV	68.2	-10.2	3.48 V	342	53.7	4.3
3	*6025.00	103.0 PK			3.48 V	342	98.8	4.2
4	*6025.00	91.2 AV			3.48 V	342	87.0	4.2
5	12050.00	53.3 PK	74.0	-20.7	3.92 V	314	40.9	12.4
6	12050.00	41.2 AV	54.0	-12.8	3.92 V	314	28.8	12.4
7	18075.00	58.2 PK	74.0	-15.8	3.21 V	171	62.9	-4.7
8	18075.00	47.2 AV	54.0	-6.8	3.21 V	171	51.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.9 PK			3.61 H	90	98.7	7.2
2	*6665.00	94.3 AV			3.61 H	90	87.1	7.2
3	13330.00	49.9 PK	74.0	-24.1	3.89 H	106	36.1	13.8
4	13330.00	37.8 AV	54.0	-16.2	3.89 H	106	24.0	13.8
5	19995.00	56.0 PK	74.0	-18.0	3.57 H	336	59.6	-3.6
6	19995.00	44.3 AV	54.0	-9.7	3.57 H	336	47.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.2 PK			3.49 V	331	96.0	7.2
2	*6665.00	91.6 AV			3.49 V	331	84.4	7.2
3	13330.00	53.1 PK	74.0	-20.9	3.91 V	308	39.3	13.8
4	13330.00	41.0 AV	54.0	-13.0	3.91 V	308	27.2	13.8
5	19995.00	58.1 PK	74.0	-15.9	3.20 V	186	61.7	-3.6
6	19995.00	47.3 AV	54.0	-6.7	3.20 V	186	50.9	-3.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


1Tx

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

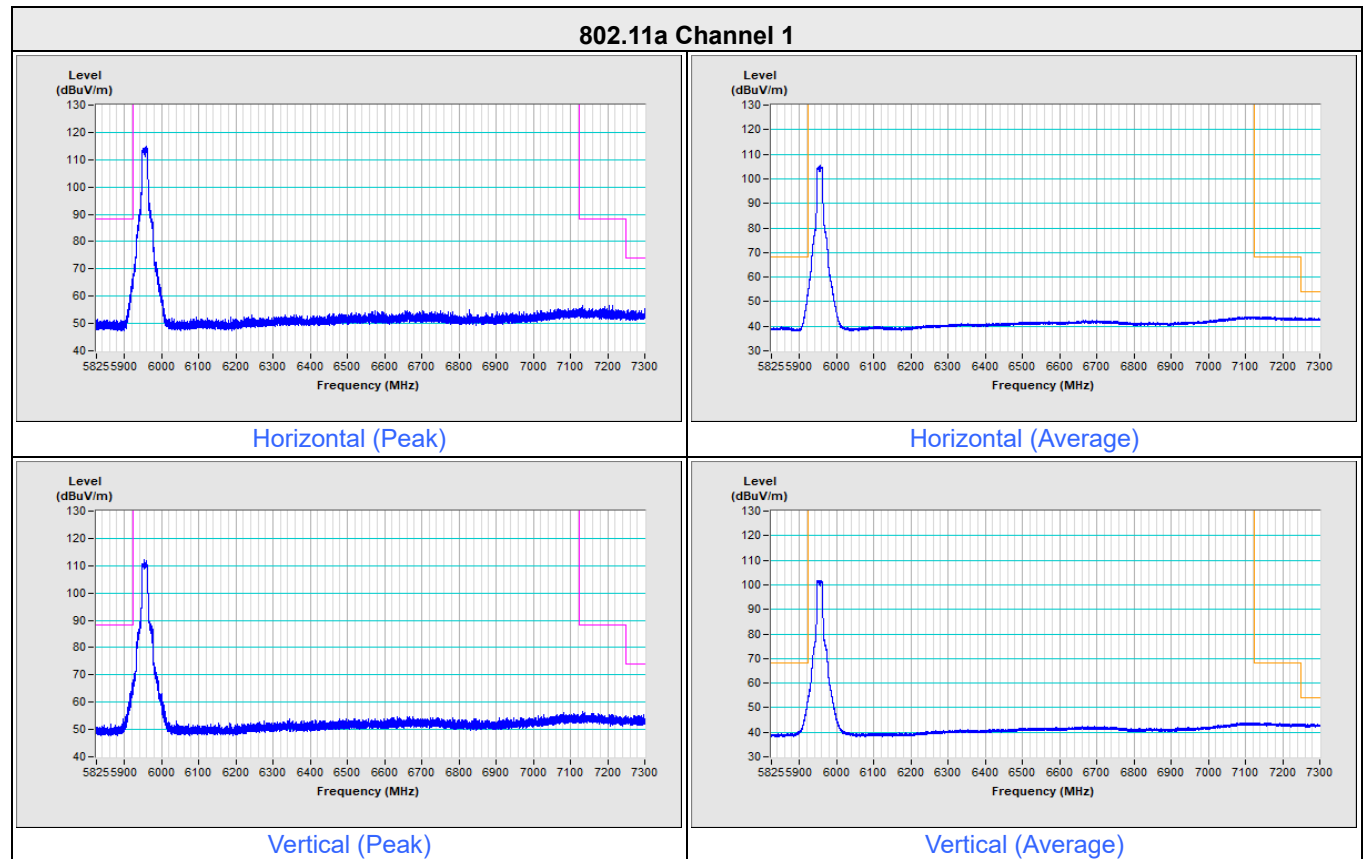


1Tx NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

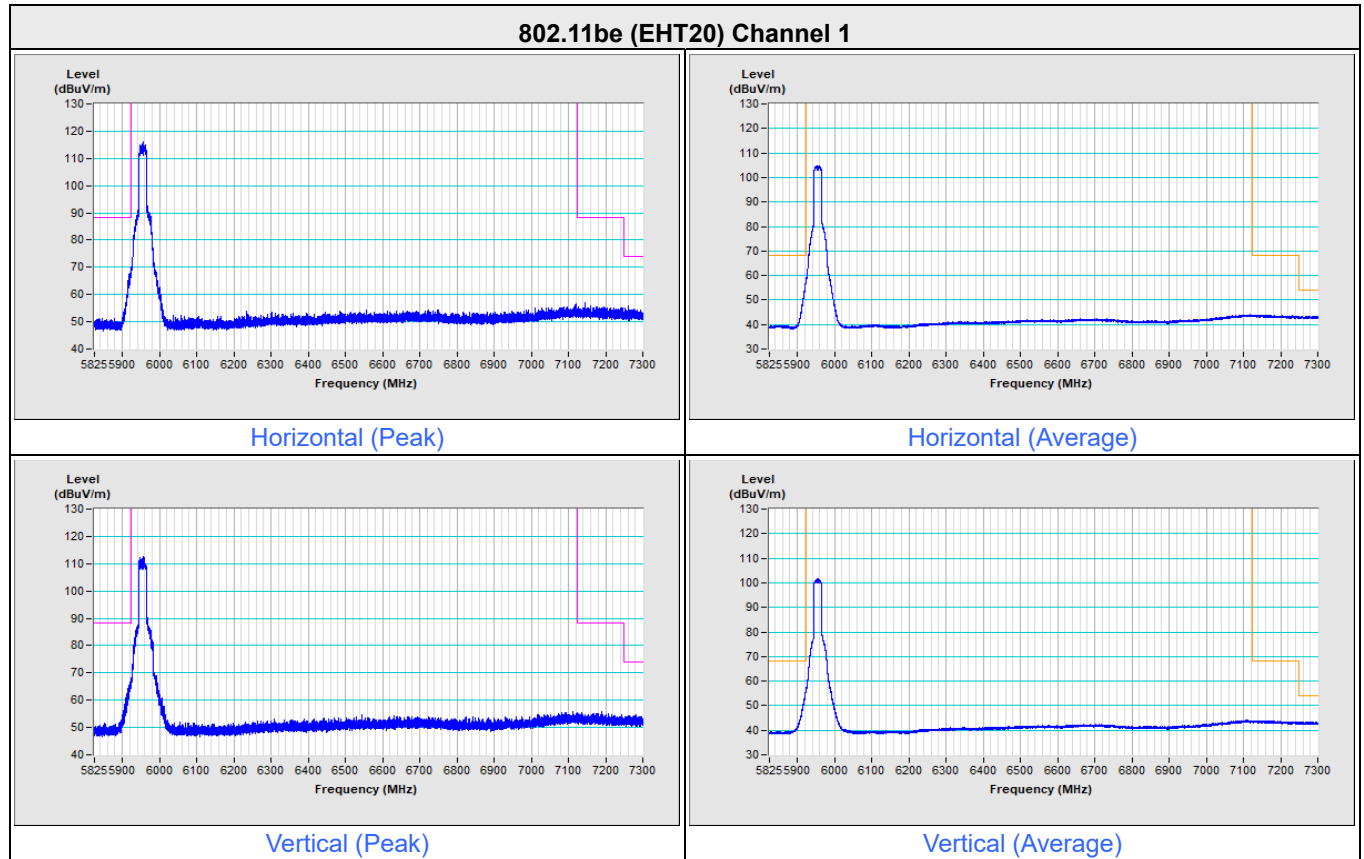


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

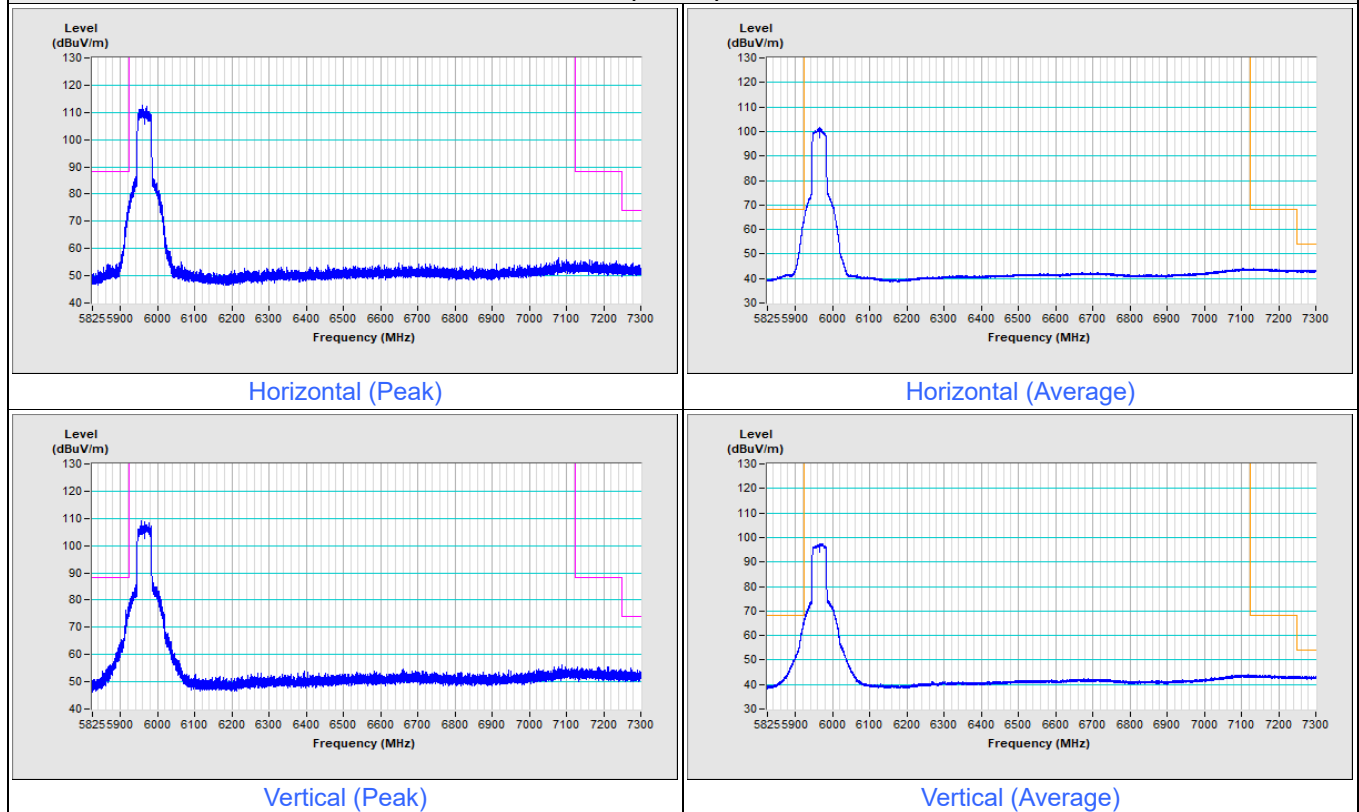


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

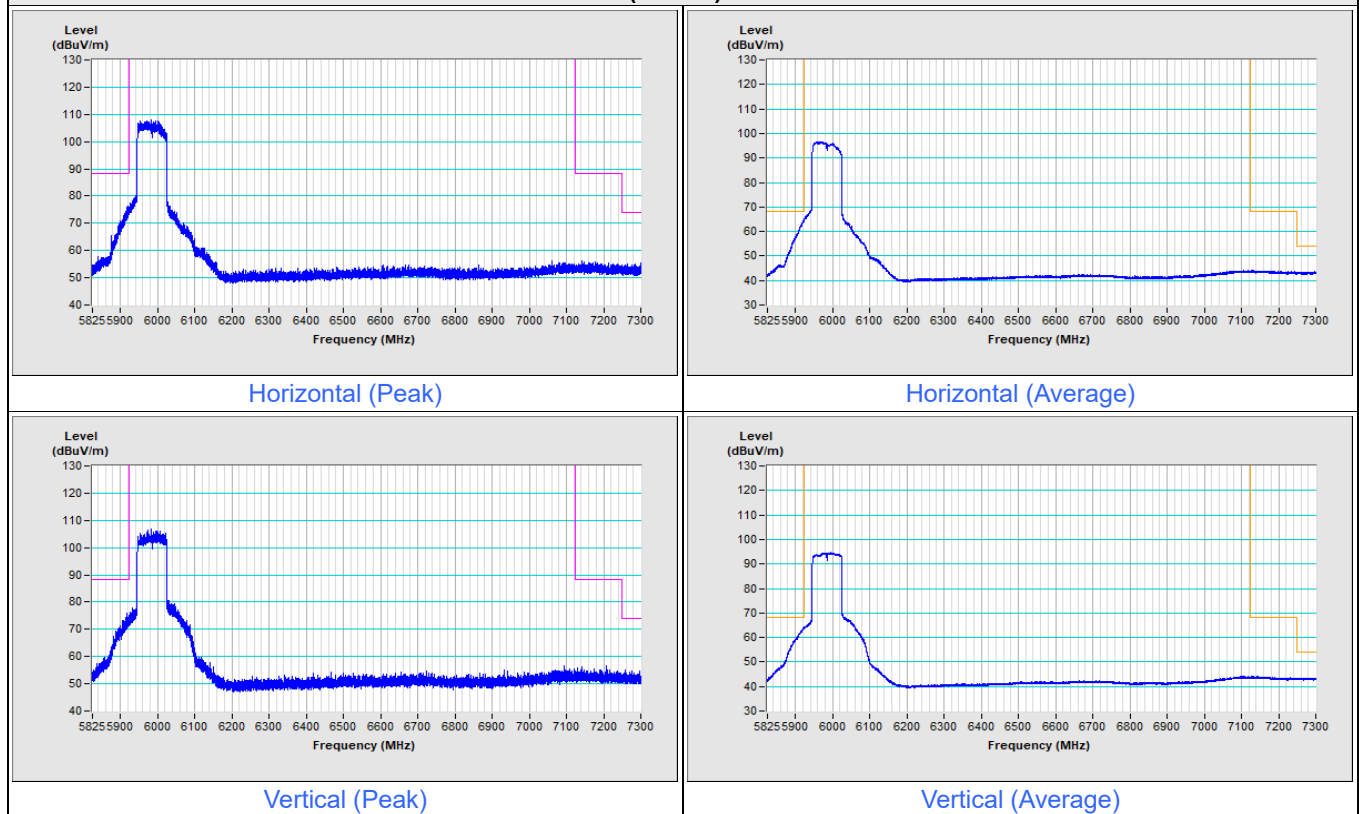


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

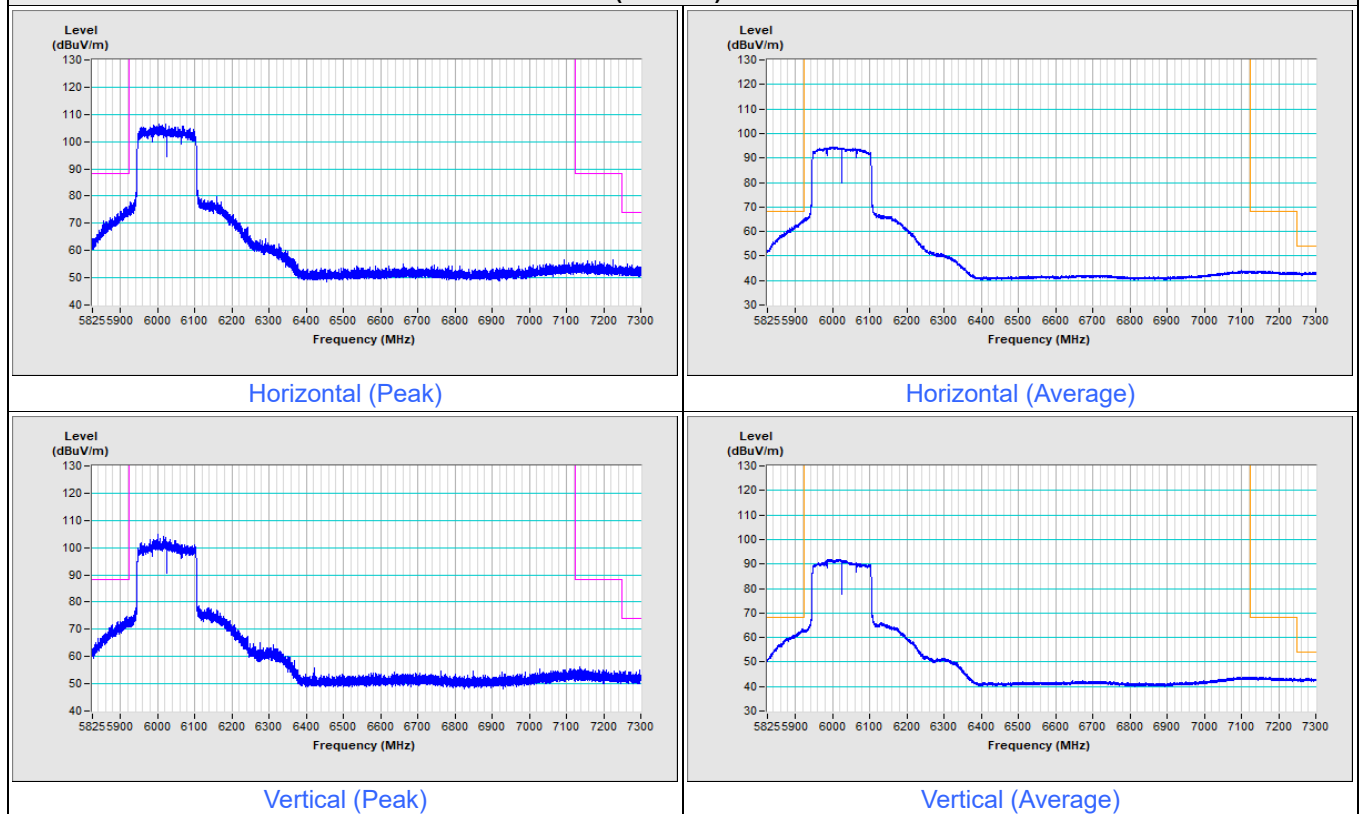


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

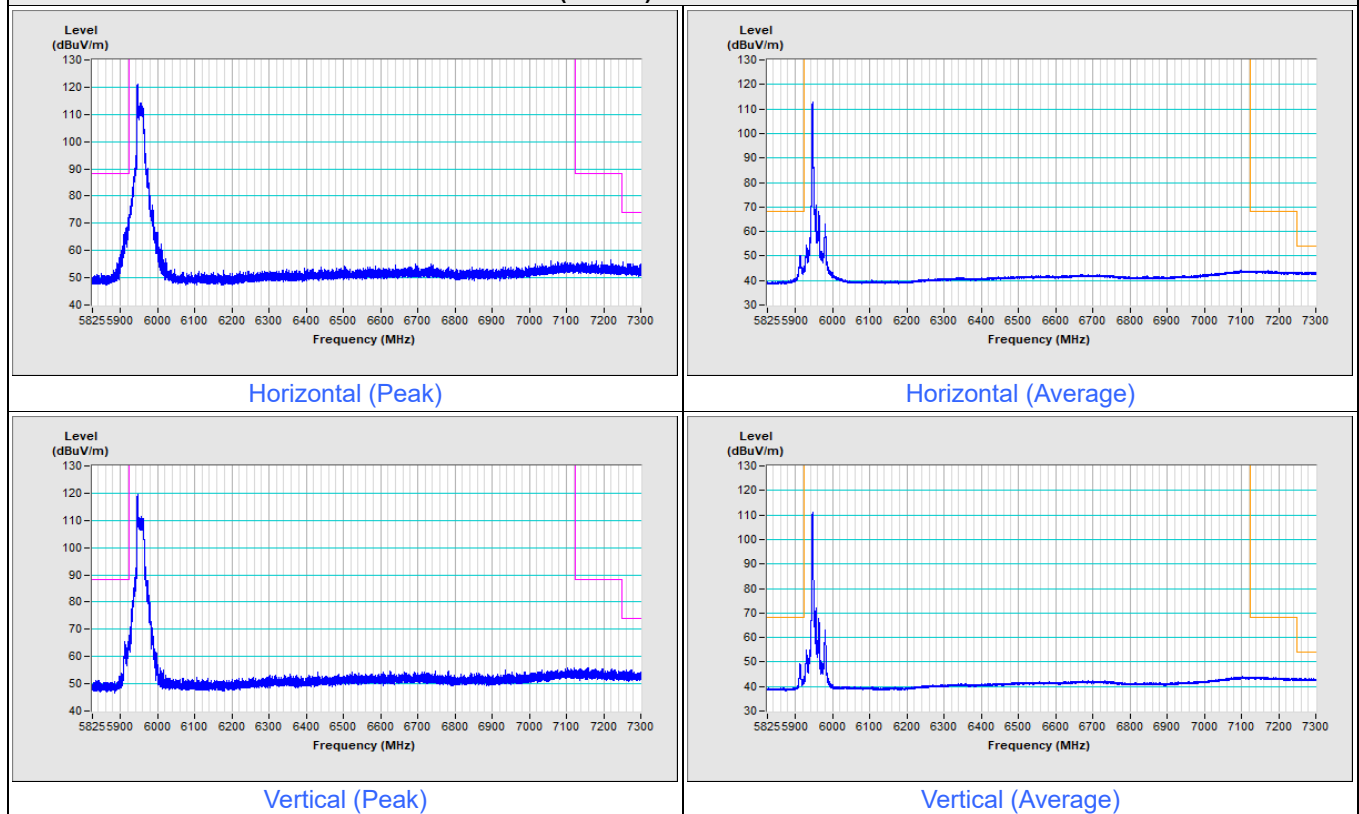


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

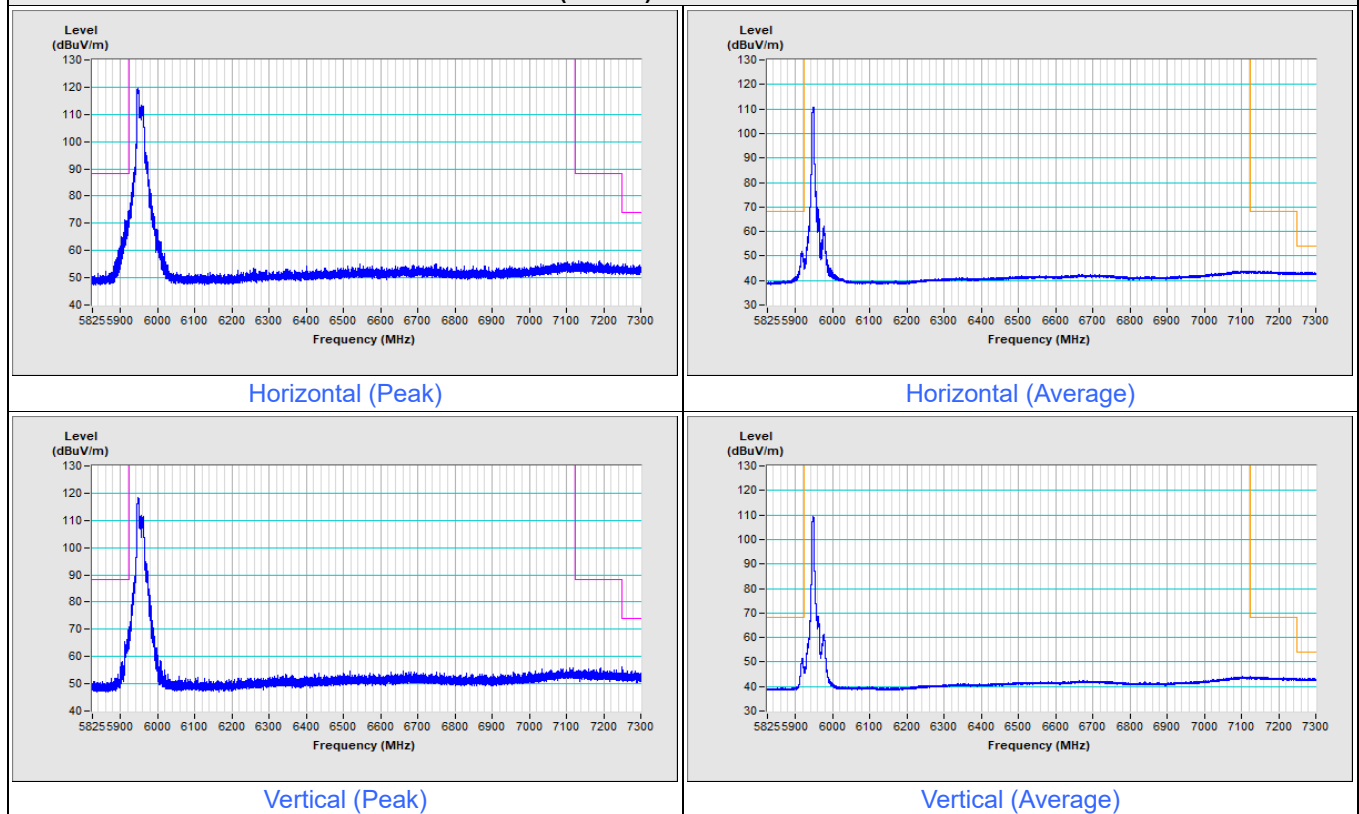


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

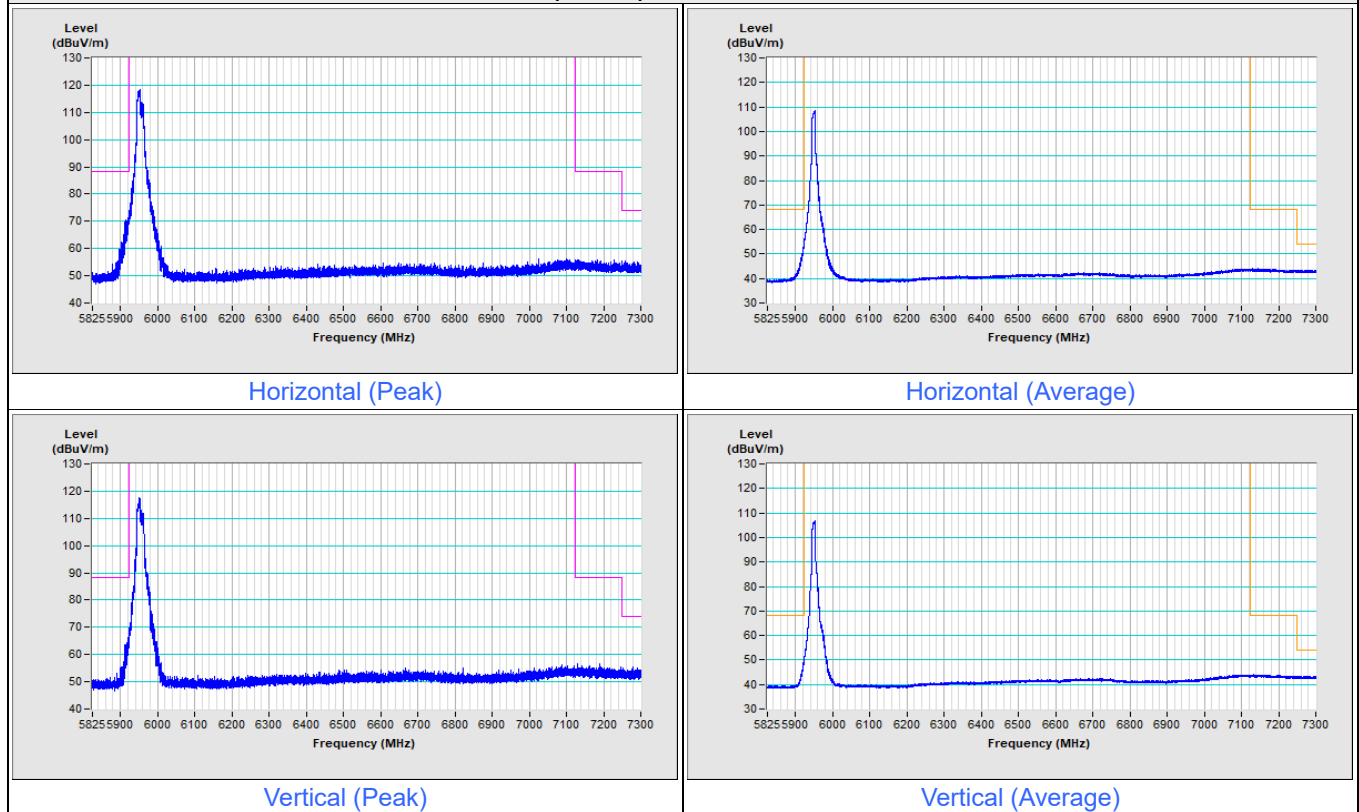


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

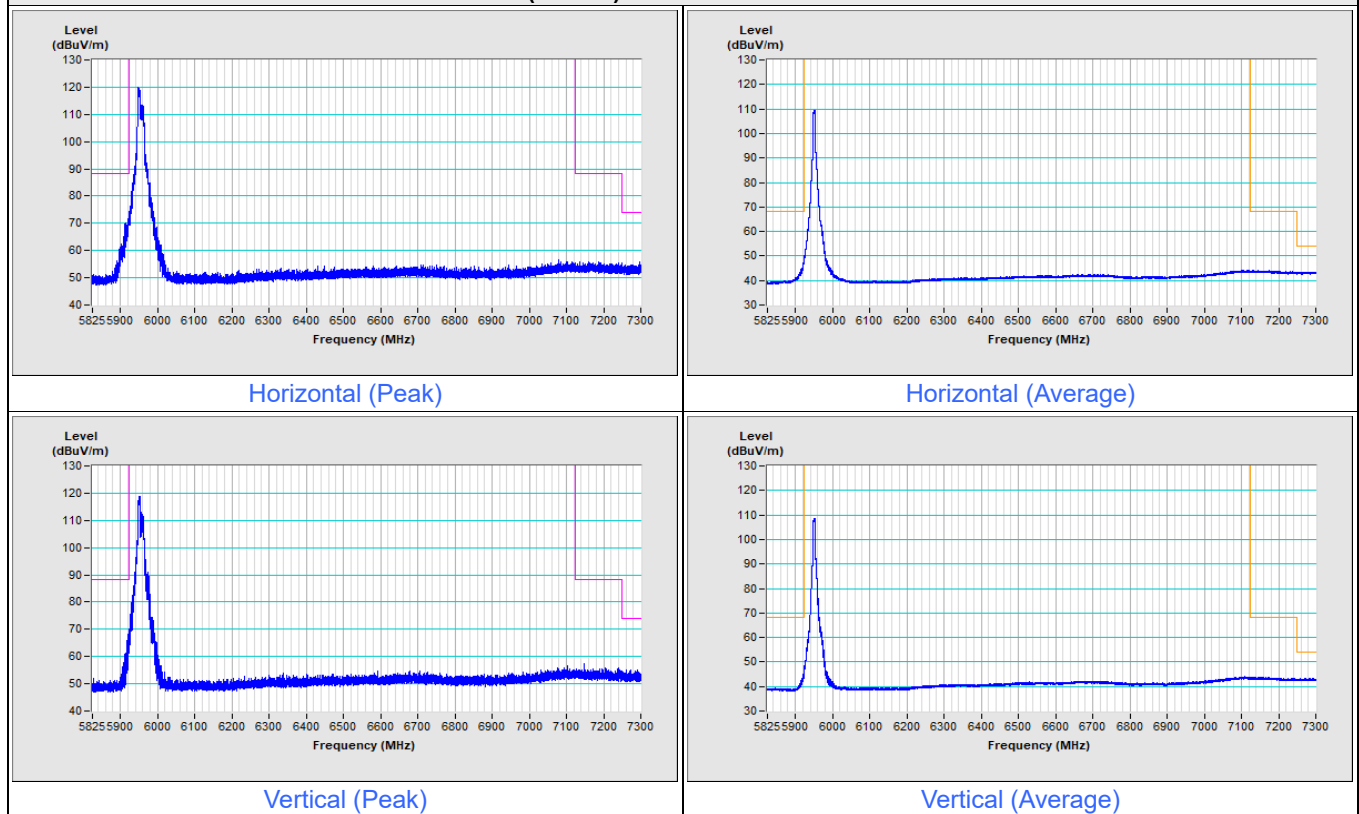


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

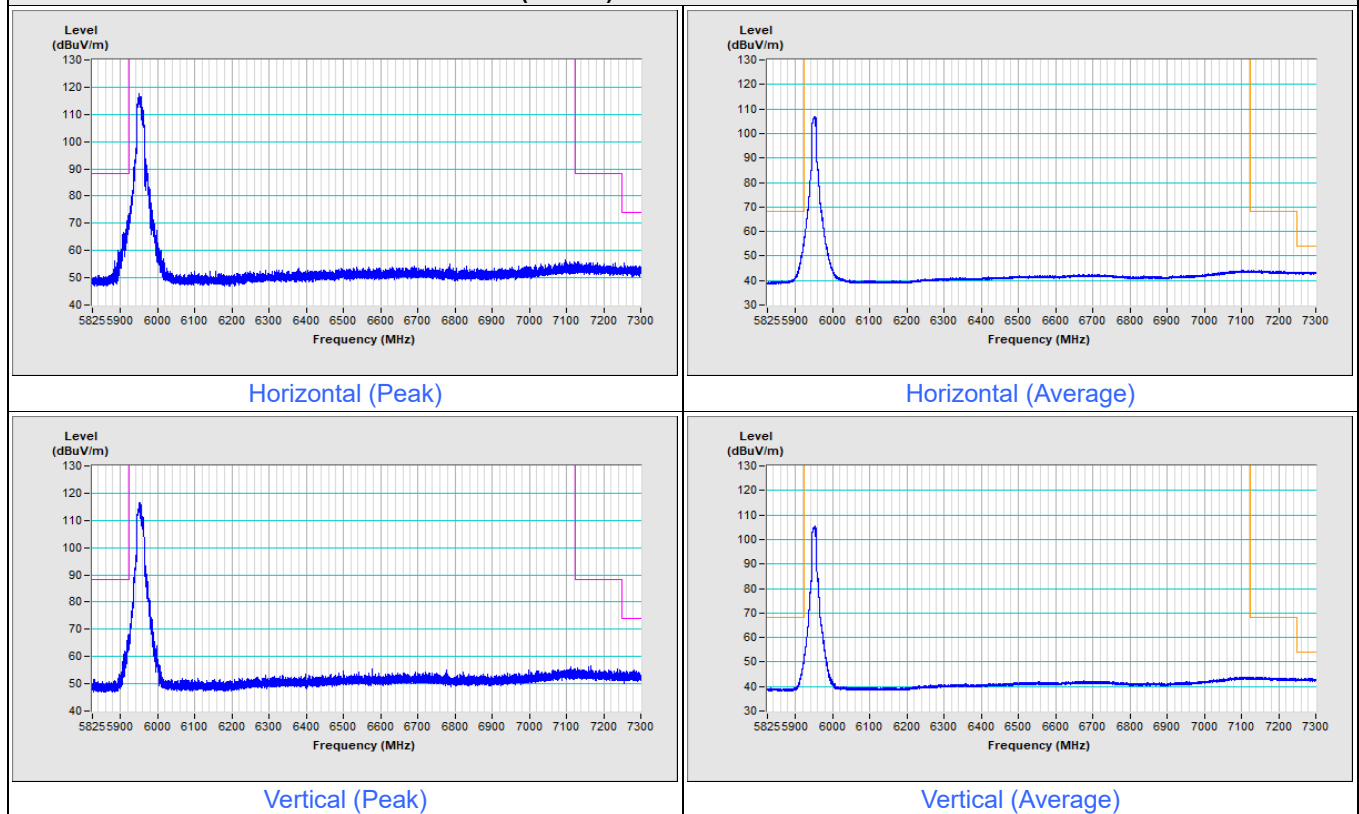


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 7

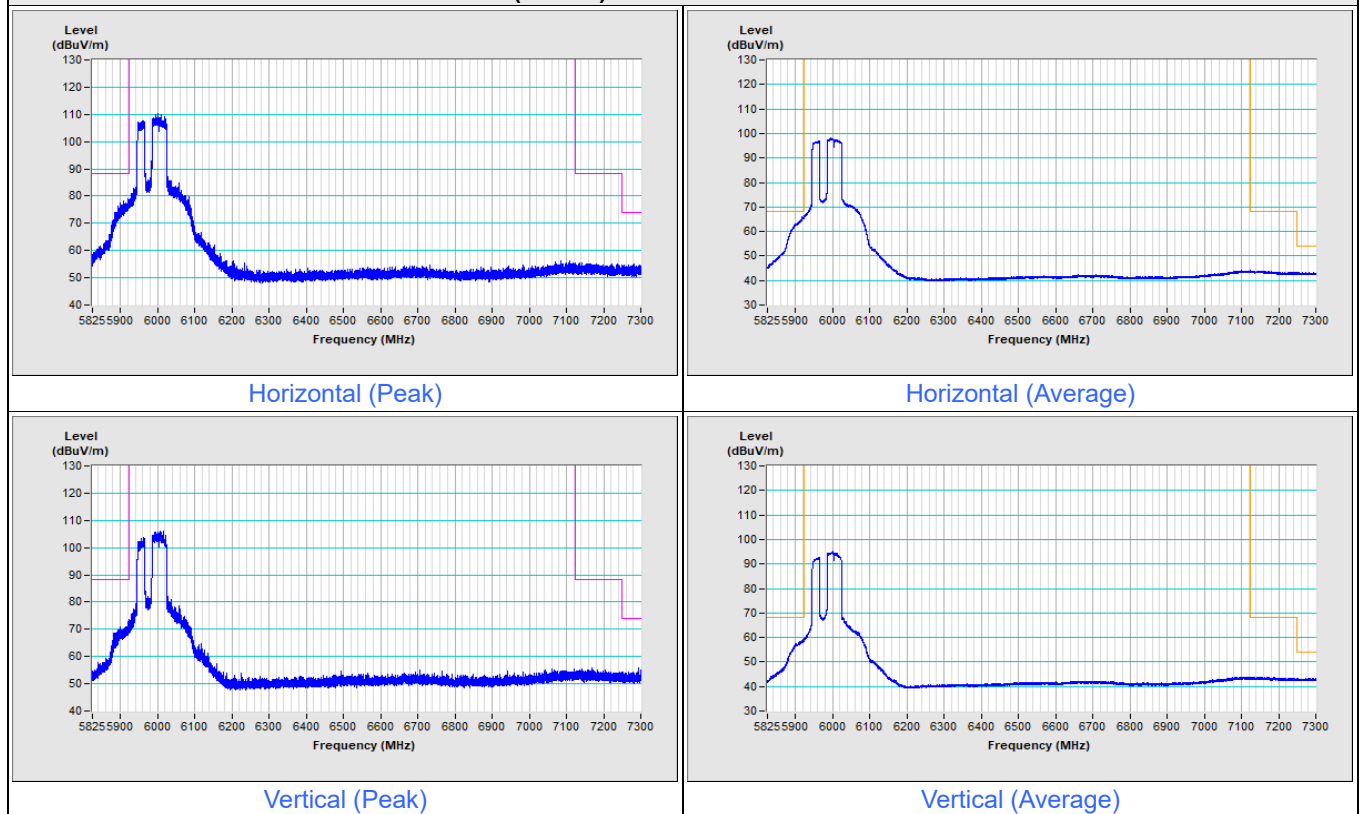


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 15

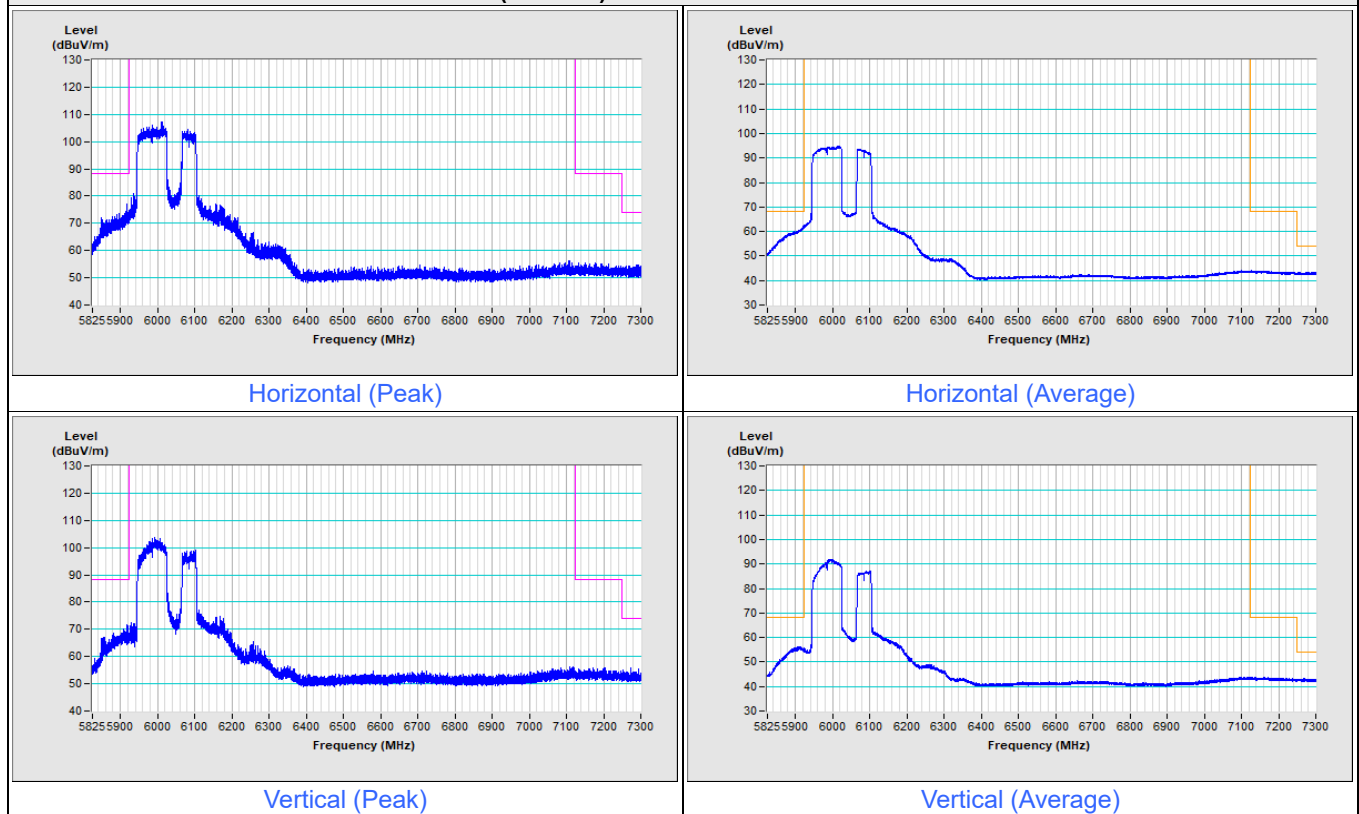

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 15

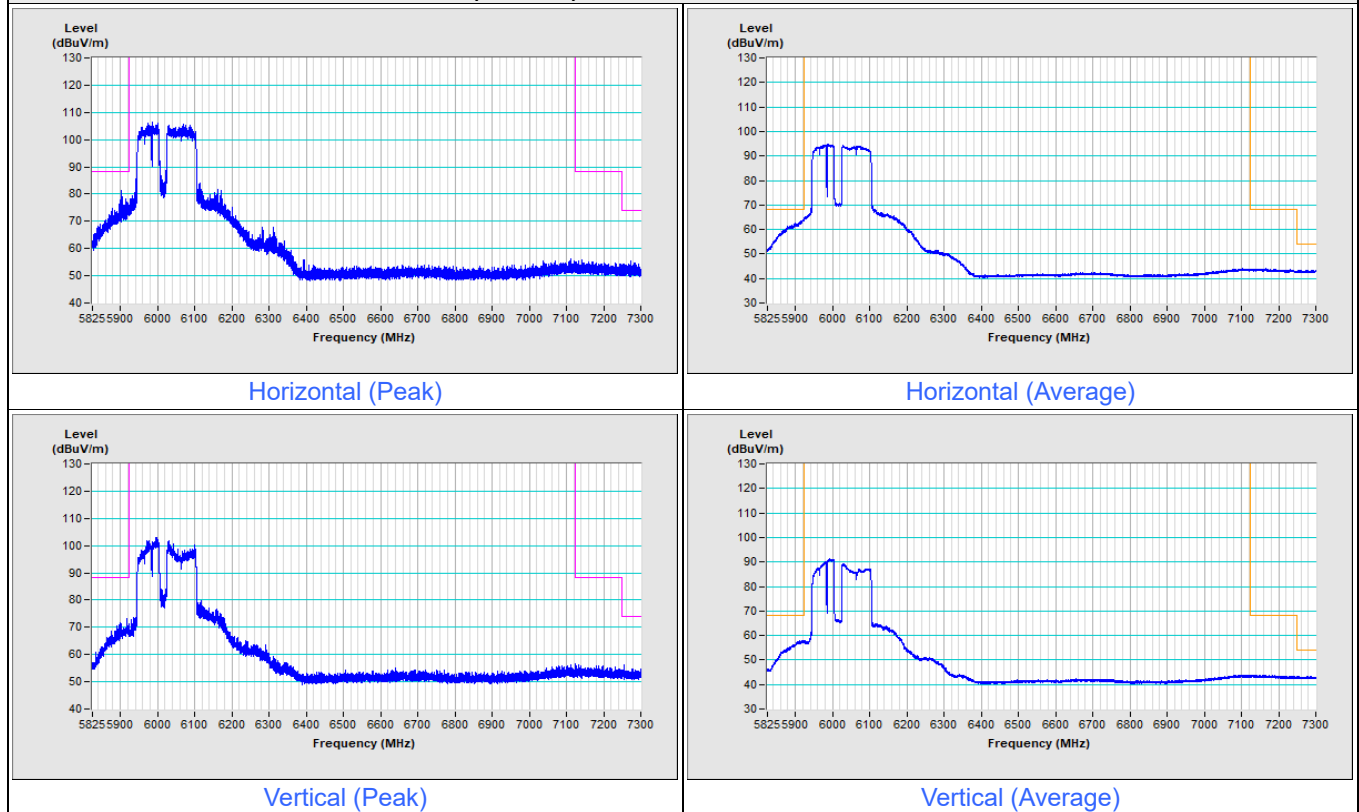

Mode B

2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.2 PK	88.2	-24.0	1.25 H	265	59.9	4.3
2	#5925.00	50.5 AV	68.2	-17.7	1.25 H	265	46.2	4.3
3	*5955.00	115.2 PK			1.25 H	265	110.7	4.5
4	*5955.00	106.5 AV			1.25 H	265	102.0	4.5
5	11910.00	50.1 PK	74.0	-23.9	1.72 H	114	37.9	12.2
6	11910.00	39.8 AV	54.0	-14.2	1.72 H	114	27.6	12.2
7	17865.00	56.7 PK	74.0	-17.3	1.01 H	30	34.8	21.9
8	17865.00	45.1 AV	54.0	-8.9	1.01 H	30	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.8 PK	88.2	-26.4	1.40 V	289	57.5	4.3
2	#5925.00	49.2 AV	68.2	-19.0	1.40 V	289	44.9	4.3
3	*5955.00	112.2 PK			1.40 V	289	107.7	4.5
4	*5955.00	103.7 AV			1.40 V	289	99.2	4.5
5	11910.00	57.8 PK	74.0	-16.2	2.55 V	141	45.6	12.2
6	11910.00	46.4 AV	54.0	-7.6	2.55 V	141	34.2	12.2
7	17865.00	57.2 PK	74.0	-16.8	1.93 V	31	35.3	21.9
8	17865.00	46.0 AV	54.0	-8.0	1.93 V	31	24.1	21.9

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
- " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.3 PK			1.15 H	246	110.5	4.8
2	*6195.00	106.8 AV			1.15 H	246	102.0	4.8
3	12390.00	49.9 PK	74.0	-24.1	1.71 H	113	37.6	12.3
4	12390.00	39.6 AV	54.0	-14.4	1.71 H	113	27.3	12.3
5	18585.00	57.0 PK	74.0	-17.0	1.00 H	27	62.0	-5.0
6	18585.00	45.2 AV	54.0	-8.8	1.00 H	27	50.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	113.8 PK			3.57 V	308	109.0	4.8
2	*6195.00	104.3 AV			3.57 V	308	99.5	4.8
3	12390.00	57.8 PK	74.0	-16.2	2.53 V	126	45.5	12.3
4	12390.00	46.7 AV	54.0	-7.3	2.53 V	126	34.4	12.3
5	18585.00	57.9 PK	74.0	-16.1	1.90 V	23	62.9	-5.0
6	18585.00	46.4 AV	54.0	-7.6	1.90 V	23	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.7 PK			1.11 H	206	108.3	6.4
2	*6415.00	105.8 AV			1.11 H	206	99.4	6.4
3	#12830.00	50.2 PK	88.2	-38.0	1.75 H	116	37.2	13.0
4	#12830.00	40.2 AV	68.2	-28.0	1.75 H	116	27.2	13.0
5	19245.00	57.0 PK	74.0	-17.0	1.00 H	44	60.8	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.00 H	44	49.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.5 PK			1.20 V	298	106.1	6.4
2	*6415.00	103.5 AV			1.20 V	298	97.1	6.4
3	#12830.00	57.9 PK	88.2	-30.3	2.57 V	139	44.9	13.0
4	#12830.00	46.5 AV	68.2	-21.7	2.57 V	139	33.5	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.90 V	43	61.1	-3.8
6	19245.00	46.0 AV	54.0	-8.0	1.90 V	43	49.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.2 PK			1.04 H	211	109.3	6.9
2	*6535.00	107.4 AV			1.04 H	211	100.5	6.9
3	#13070.00	50.6 PK	88.2	-37.6	1.73 H	119	37.4	13.2
4	#13070.00	40.0 AV	68.2	-28.2	1.73 H	119	26.8	13.2
5	19605.00	56.6 PK	74.0	-17.4	1.00 H	27	60.6	-4.0
6	19605.00	45.3 AV	54.0	-8.7	1.00 H	27	49.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.8 PK			1.38 V	306	107.9	6.9
2	*6535.00	106.3 AV			1.38 V	306	99.4	6.9
3	#13070.00	57.6 PK	88.2	-30.6	2.56 V	132	44.4	13.2
4	#13070.00	46.4 AV	68.2	-21.8	2.56 V	132	33.2	13.2
5	19605.00	56.5 PK	74.0	-17.5	1.91 V	44	60.5	-4.0
6	19605.00	45.6 AV	54.0	-8.4	1.91 V	44	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.4 PK			1.04 H	204	109.2	7.2
2	*6695.00	107.5 AV			1.04 H	204	100.3	7.2
3	13390.00	50.1 PK	74.0	-23.9	1.68 H	125	36.1	14.0
4	13390.00	39.8 AV	54.0	-14.2	1.68 H	125	25.8	14.0
5	20085.00	57.0 PK	74.0	-17.0	1.00 H	15	60.5	-3.5
6	20085.00	45.2 AV	54.0	-8.8	1.00 H	15	48.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.0 PK			1.14 V	293	107.8	7.2
2	*6695.00	106.5 AV			1.14 V	293	99.3	7.2
3	13390.00	57.7 PK	74.0	-16.3	2.58 V	129	43.7	14.0
4	13390.00	46.4 AV	54.0	-7.6	2.58 V	129	32.4	14.0
5	20085.00	56.6 PK	74.0	-17.4	1.95 V	28	60.1	-3.5
6	20085.00	45.5 AV	54.0	-8.5	1.95 V	28	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.6 PK			1.06 H	210	110.4	7.2
2	*6855.00	108.3 AV			1.06 H	210	101.1	7.2
3	#13710.00	49.9 PK	88.2	-38.3	1.68 H	118	34.7	15.2
4	#13710.00	39.6 AV	68.2	-28.6	1.68 H	118	24.4	15.2
5	20565.00	56.1 PK	74.0	-17.9	1.03 H	36	59.4	-3.3
6	20565.00	44.8 AV	54.0	-9.2	1.03 H	36	48.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.1 PK			1.16 V	301	108.9	7.2
2	*6855.00	107.2 AV			1.16 V	301	100.0	7.2
3	#13710.00	57.3 PK	88.2	-30.9	2.59 V	137	42.1	15.2
4	#13710.00	46.1 AV	68.2	-22.1	2.59 V	137	30.9	15.2
5	20565.00	56.9 PK	74.0	-17.1	1.87 V	21	60.2	-3.3
6	20565.00	45.9 AV	54.0	-8.1	1.87 V	21	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.2 PK	88.2	-18.0	1.08 H	263	65.9	4.3
2	#5925.00	58.4 AV	68.2	-9.8	1.08 H	263	54.1	4.3
3	*5955.00	116.3 PK			1.08 H	263	111.8	4.5
4	*5955.00	105.6 AV			1.08 H	263	101.1	4.5
5	11910.00	50.1 PK	74.0	-23.9	1.67 H	105	37.9	12.2
6	11910.00	39.9 AV	54.0	-14.1	1.67 H	105	27.7	12.2
7	17865.00	56.1 PK	74.0	-17.9	1.01 H	49	34.2	21.9
8	17865.00	45.0 AV	54.0	-9.0	1.01 H	49	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.0 PK	88.2	-19.2	1.19 V	296	64.7	4.3
2	#5925.00	57.7 AV	68.2	-10.5	1.19 V	296	53.4	4.3
3	*5955.00	115.0 PK			1.19 V	296	110.5	4.5
4	*5955.00	103.2 AV			1.19 V	296	98.7	4.5
5	11910.00	57.5 PK	74.0	-16.5	2.63 V	148	45.3	12.2
6	11910.00	46.1 AV	54.0	-7.9	2.63 V	148	33.9	12.2
7	17865.00	56.2 PK	74.0	-17.8	1.93 V	33	34.3	21.9
8	17865.00	45.5 AV	54.0	-8.5	1.93 V	33	23.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.7 PK			1.08 H	245	111.9	4.8
2	*6195.00	105.7 AV			1.08 H	245	100.9	4.8
3	12390.00	49.8 PK	74.0	-24.2	1.67 H	125	37.5	12.3
4	12390.00	39.5 AV	54.0	-14.5	1.67 H	125	27.2	12.3
5	18585.00	55.8 PK	74.0	-18.2	1.09 H	21	60.8	-5.0
6	18585.00	44.4 AV	54.0	-9.6	1.09 H	21	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.2 PK			1.23 V	291	110.4	4.8
2	*6195.00	103.3 AV			1.23 V	291	98.5	4.8
3	12390.00	57.8 PK	74.0	-16.2	2.55 V	135	45.5	12.3
4	12390.00	46.6 AV	54.0	-7.4	2.55 V	135	34.3	12.3
5	18585.00	56.8 PK	74.0	-17.2	1.93 V	10	61.8	-5.0
6	18585.00	45.6 AV	54.0	-8.4	1.93 V	10	50.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.8 PK			1.02 H	206	109.4	6.4
2	*6415.00	105.3 AV			1.02 H	206	98.9	6.4
3	#12830.00	49.5 PK	88.2	-38.7	1.69 H	119	36.5	13.0
4	#12830.00	39.1 AV	68.2	-29.1	1.69 H	119	26.1	13.0
5	19245.00	56.0 PK	74.0	-18.0	1.00 H	26	59.8	-3.8
6	19245.00	44.5 AV	54.0	-9.5	1.00 H	26	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.9 PK			1.20 V	300	108.5	6.4
2	*6415.00	103.0 AV			1.20 V	300	96.6	6.4
3	#12830.00	57.5 PK	88.2	-30.7	2.64 V	151	44.5	13.0
4	#12830.00	46.3 AV	68.2	-21.9	2.64 V	151	33.3	13.0
5	19245.00	56.5 PK	74.0	-17.5	1.86 V	10	60.3	-3.8
6	19245.00	45.8 AV	54.0	-8.2	1.86 V	10	49.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.12 H	204	110.7	6.9
2	*6535.00	107.0 AV			1.12 H	204	100.1	6.9
3	#13070.00	50.4 PK	88.2	-37.8	1.67 H	116	37.2	13.2
4	#13070.00	39.9 AV	68.2	-28.3	1.67 H	116	26.7	13.2
5	19605.00	56.4 PK	74.0	-17.6	1.01 H	35	60.4	-4.0
6	19605.00	44.9 AV	54.0	-9.1	1.01 H	35	48.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.3 PK			1.17 V	286	108.4	6.9
2	*6535.00	103.6 AV			1.17 V	286	96.7	6.9
3	#13070.00	57.0 PK	88.2	-31.2	2.64 V	139	43.8	13.2
4	#13070.00	45.8 AV	68.2	-22.4	2.64 V	139	32.6	13.2
5	19605.00	56.8 PK	74.0	-17.2	1.90 V	17	60.8	-4.0
6	19605.00	45.6 AV	54.0	-8.4	1.90 V	17	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.8 PK			1.11 H	202	110.6	7.2
2	*6695.00	106.5 AV			1.11 H	202	99.3	7.2
3	13390.00	49.7 PK	74.0	-24.3	1.73 H	114	35.7	14.0
4	13390.00	39.3 AV	54.0	-14.7	1.73 H	114	25.3	14.0
5	20085.00	55.8 PK	74.0	-18.2	1.00 H	45	59.3	-3.5
6	20085.00	44.8 AV	54.0	-9.2	1.00 H	45	48.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.0 PK			1.19 V	297	107.8	7.2
2	*6695.00	103.3 AV			1.19 V	297	96.1	7.2
3	13390.00	57.2 PK	74.0	-16.8	2.58 V	143	43.2	14.0
4	13390.00	45.7 AV	54.0	-8.3	2.58 V	143	31.7	14.0
5	20085.00	57.4 PK	74.0	-16.6	1.86 V	35	60.9	-3.5
6	20085.00	46.4 AV	54.0	-7.6	1.86 V	35	49.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			1.12 H	207	111.2	7.2
2	*6855.00	106.9 AV			1.12 H	207	99.7	7.2
3	#13710.00	50.3 PK	88.2	-37.9	1.64 H	111	35.1	15.2
4	#13710.00	40.0 AV	68.2	-28.2	1.64 H	111	24.8	15.2
5	20565.00	56.2 PK	74.0	-17.8	1.00 H	21	59.5	-3.3
6	20565.00	44.8 AV	54.0	-9.2	1.00 H	21	48.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.0 PK			1.19 V	295	107.8	7.2
2	*6855.00	103.1 AV			1.19 V	295	95.9	7.2
3	#13710.00	57.8 PK	88.2	-30.4	2.54 V	140	42.6	15.2
4	#13710.00	46.6 AV	68.2	-21.6	2.54 V	140	31.4	15.2
5	20565.00	57.5 PK	74.0	-16.5	1.90 V	12	60.8	-3.3
6	20565.00	46.2 AV	54.0	-7.8	1.90 V	12	49.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.5 PK	88.2	-10.7	4.00 H	79	73.2	4.3
2	#5925.00	65.5 AV	68.2	-2.7	4.00 H	79	61.2	4.3
3	*5965.00	114.2 PK			4.00 H	79	109.8	4.4
4	*5965.00	102.1 AV			4.00 H	79	97.7	4.4
5	11930.00	50.0 PK	74.0	-24.0	1.66 H	120	37.9	12.1
6	11930.00	39.8 AV	54.0	-14.2	1.66 H	120	27.7	12.1
7	17895.00	56.8 PK	74.0	-17.2	1.01 H	22	34.5	22.3
8	17895.00	45.3 AV	54.0	-8.7	1.01 H	22	23.0	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.7 PK	88.2	-12.5	1.15 V	286	71.4	4.3
2	#5925.00	64.1 AV	68.2	-4.1	1.15 V	286	59.8	4.3
3	*5965.00	109.0 PK			1.15 V	286	104.6	4.4
4	*5965.00	98.1 AV			1.15 V	286	93.7	4.4
5	11930.00	57.0 PK	74.0	-17.0	2.56 V	143	44.9	12.1
6	11930.00	45.6 AV	54.0	-8.4	2.56 V	143	33.5	12.1
7	17895.00	57.1 PK	74.0	-16.9	1.91 V	34	34.8	22.3
8	17895.00	46.1 AV	54.0	-7.9	1.91 V	34	23.8	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.0 PK			1.09 H	255	109.1	4.9
2	*6205.00	103.0 AV			1.09 H	255	98.1	4.9
3	12410.00	49.9 PK	74.0	-24.1	1.72 H	113	37.6	12.3
4	12410.00	39.3 AV	54.0	-14.7	1.72 H	113	27.0	12.3
5	18615.00	56.1 PK	74.0	-17.9	1.01 H	28	61.0	-4.9
6	18615.00	45.1 AV	54.0	-8.9	1.01 H	28	50.0	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	110.5 PK			1.13 V	297	105.6	4.9
2	*6205.00	98.7 AV			1.13 V	297	93.8	4.9
3	12410.00	56.8 PK	74.0	-17.2	2.53 V	131	44.5	12.3
4	12410.00	45.8 AV	54.0	-8.2	2.53 V	131	33.5	12.3
5	18615.00	56.5 PK	74.0	-17.5	1.87 V	26	61.4	-4.9
6	18615.00	45.5 AV	54.0	-8.5	1.87 V	26	50.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.4 PK			1.02 H	206	107.0	6.4
2	*6405.00	102.3 AV			1.02 H	206	95.9	6.4
3	#12810.00	50.5 PK	88.2	-37.7	1.67 H	113	37.7	12.8
4	#12810.00	39.9 AV	68.2	-28.3	1.67 H	113	27.1	12.8
5	19215.00	56.3 PK	74.0	-17.7	1.06 H	23	60.0	-3.7
6	19215.00	44.8 AV	54.0	-9.2	1.06 H	23	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.6 PK			1.17 V	310	104.2	6.4
2	*6405.00	98.6 AV			1.17 V	310	92.2	6.4
3	#12810.00	57.0 PK	88.2	-31.2	2.55 V	145	44.2	12.8
4	#12810.00	45.6 AV	68.2	-22.6	2.55 V	145	32.8	12.8
5	19215.00	57.0 PK	74.0	-17.0	1.87 V	37	60.7	-3.7
6	19215.00	46.1 AV	54.0	-7.9	1.87 V	37	49.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	115.0 PK			1.00 H	205	108.1	6.9
2	*6565.00	103.1 AV			1.00 H	205	96.2	6.9
3	#13130.00	50.2 PK	88.2	-38.0	1.73 H	104	37.0	13.2
4	#13130.00	39.9 AV	68.2	-28.3	1.73 H	104	26.7	13.2
5	19695.00	55.8 PK	74.0	-18.2	1.07 H	39	59.7	-3.9
6	19695.00	44.6 AV	54.0	-9.4	1.07 H	39	48.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.0 PK			1.16 V	283	103.1	6.9
2	*6565.00	98.5 AV			1.16 V	283	91.6	6.9
3	#13130.00	57.1 PK	88.2	-31.1	2.57 V	152	43.9	13.2
4	#13130.00	46.0 AV	68.2	-22.2	2.57 V	152	32.8	13.2
5	19695.00	56.7 PK	74.0	-17.3	1.88 V	33	60.6	-3.9
6	19695.00	45.8 AV	54.0	-8.2	1.88 V	33	49.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.2 PK			1.14 H	203	107.0	7.2
2	*6685.00	103.1 AV			1.14 H	203	95.9	7.2
3	13370.00	49.4 PK	74.0	-24.6	1.68 H	115	35.4	14.0
4	13370.00	39.2 AV	54.0	-14.8	1.68 H	115	25.2	14.0
5	20055.00	56.3 PK	74.0	-17.7	1.05 H	46	59.8	-3.5
6	20055.00	44.7 AV	54.0	-9.3	1.05 H	46	48.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.9 PK			1.13 V	310	103.7	7.2
2	*6685.00	99.0 AV			1.13 V	310	91.8	7.2
3	13370.00	57.6 PK	74.0	-16.4	2.62 V	122	43.6	14.0
4	13370.00	46.3 AV	54.0	-7.7	2.62 V	122	32.3	14.0
5	20055.00	56.3 PK	74.0	-17.7	1.83 V	7	59.8	-3.5
6	20055.00	45.5 AV	54.0	-8.5	1.83 V	7	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.1 PK			1.06 H	210	107.0	7.1
2	*6845.00	102.5 AV			1.06 H	210	95.4	7.1
3	#13690.00	50.5 PK	88.2	-37.7	1.69 H	112	35.4	15.1
4	#13690.00	40.0 AV	68.2	-28.2	1.69 H	112	24.9	15.1
5	20535.00	55.9 PK	74.0	-18.1	1.06 H	37	59.1	-3.2
6	20535.00	44.6 AV	54.0	-9.4	1.06 H	37	47.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.2 PK			1.17 V	272	103.1	7.1
2	*6845.00	98.4 AV			1.17 V	272	91.3	7.1
3	#13690.00	57.3 PK	88.2	-30.9	2.65 V	142	42.2	15.1
4	#13690.00	46.0 AV	68.2	-22.2	2.65 V	142	30.9	15.1
5	20535.00	57.4 PK	74.0	-16.6	1.88 V	7	60.6	-3.2
6	20535.00	46.3 AV	54.0	-7.7	1.88 V	7	49.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.16 H	262	72.2	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.16 H	262	62.2	4.3
3	*5985.00	110.2 PK			1.16 H	262	105.8	4.4
4	*5985.00	97.8 AV			1.16 H	262	93.4	4.4
5	11970.00	50.0 PK	74.0	-24.0	1.69 H	119	37.8	12.2
6	11970.00	39.8 AV	54.0	-14.2	1.69 H	119	27.6	12.2
7	17955.00	56.6 PK	74.0	-17.4	1.07 H	21	33.2	23.4
8	17955.00	45.0 AV	54.0	-9.0	1.07 H	21	21.6	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.3 PK	88.2	-13.9	1.12 V	296	70.0	4.3
2	#5925.00	61.9 AV	68.2	-6.3	1.12 V	296	57.6	4.3
3	*5985.00	105.8 PK			1.12 V	296	101.4	4.4
4	*5985.00	94.0 AV			1.12 V	296	89.6	4.4
5	11970.00	57.5 PK	74.0	-16.5	2.65 V	142	45.3	12.2
6	11970.00	46.2 AV	54.0	-7.8	2.65 V	142	34.0	12.2
7	17955.00	57.1 PK	74.0	-16.9	1.81 V	12	33.7	23.4
8	17955.00	45.9 AV	54.0	-8.1	1.81 V	12	22.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.2 PK			1.17 H	247	107.2	5.0
2	*6225.00	100.0 AV			1.17 H	247	95.0	5.0
3	12450.00	49.4 PK	74.0	-24.6	1.67 H	111	37.1	12.3
4	12450.00	39.4 AV	54.0	-14.6	1.67 H	111	27.1	12.3
5	18675.00	55.4 PK	74.0	-18.6	1.06 H	23	60.3	-4.9
6	18675.00	44.4 AV	54.0	-9.6	1.06 H	23	49.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.5 PK			1.07 V	305	104.5	5.0
2	*6225.00	96.2 AV			1.07 V	305	91.2	5.0
3	12450.00	57.7 PK	74.0	-16.3	2.56 V	121	45.4	12.3
4	12450.00	46.5 AV	54.0	-7.5	2.56 V	121	34.2	12.3
5	18675.00	56.9 PK	74.0	-17.1	1.83 V	7	61.8	-4.9
6	18675.00	45.8 AV	54.0	-8.2	1.83 V	7	50.7	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.6 PK			1.03 H	206	105.4	6.2
2	*6385.00	100.1 AV			1.03 H	206	93.9	6.2
3	#12770.00	49.8 PK	88.2	-38.4	1.69 H	114	37.0	12.8
4	#12770.00	39.5 AV	68.2	-28.7	1.69 H	114	26.7	12.8
5	19155.00	56.0 PK	74.0	-18.0	1.00 H	20	59.8	-3.8
6	19155.00	44.8 AV	54.0	-9.2	1.00 H	20	48.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.0 PK			1.06 V	319	102.8	6.2
2	*6385.00	96.0 AV			1.06 V	319	89.8	6.2
3	#12770.00	57.6 PK	88.2	-30.6	2.58 V	141	44.8	12.8
4	#12770.00	46.3 AV	68.2	-21.9	2.58 V	141	33.5	12.8
5	19155.00	57.1 PK	74.0	-16.9	1.86 V	12	60.9	-3.8
6	19155.00	46.1 AV	54.0	-7.9	1.86 V	12	49.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.6 PK			1.08 H	210	105.7	6.9
2	*6625.00	100.6 AV			1.08 H	210	93.7	6.9
3	13250.00	49.2 PK	74.0	-24.8	1.64 H	103	35.6	13.6
4	13250.00	39.2 AV	54.0	-14.8	1.64 H	103	25.6	13.6
5	19875.00	55.9 PK	74.0	-18.1	1.06 H	46	59.4	-3.5
6	19875.00	44.4 AV	54.0	-9.6	1.06 H	46	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.8 PK			1.02 V	319	102.9	6.9
2	*6625.00	96.6 AV			1.02 V	319	89.7	6.9
3	13250.00	57.7 PK	74.0	-16.3	2.59 V	123	44.1	13.6
4	13250.00	46.6 AV	54.0	-7.4	2.59 V	123	33.0	13.6
5	19875.00	56.5 PK	74.0	-17.5	1.88 V	13	60.0	-3.5
6	19875.00	45.6 AV	54.0	-8.4	1.88 V	13	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.9 PK			1.09 H	205	105.7	7.2
2	*6705.00	100.2 AV			1.09 H	205	93.0	7.2
3	#13410.00	49.3 PK	88.2	-38.9	1.73 H	129	35.1	14.2
4	#13410.00	39.2 AV	68.2	-29.0	1.73 H	129	25.0	14.2
5	20115.00	56.0 PK	74.0	-18.0	1.02 H	46	59.5	-3.5
6	20115.00	44.9 AV	54.0	-9.1	1.02 H	46	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.1 PK			1.09 V	289	102.9	7.2
2	*6705.00	96.7 AV			1.09 V	289	89.5	7.2
3	#13410.00	57.6 PK	88.2	-30.6	2.60 V	124	43.4	14.2
4	#13410.00	46.2 AV	68.2	-22.0	2.60 V	124	32.0	14.2
5	20115.00	57.0 PK	74.0	-17.0	1.92 V	30	60.5	-3.5
6	20115.00	45.9 AV	54.0	-8.1	1.92 V	30	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	112.2 PK			1.00 H	204	105.2	7.0
2	*6785.00	100.4 AV			1.00 H	204	93.4	7.0
3	#13570.00	50.2 PK	88.2	-38.0	1.63 H	117	35.6	14.6
4	#13570.00	40.0 AV	68.2	-28.2	1.63 H	117	25.4	14.6
5	20355.00	56.0 PK	74.0	-18.0	1.07 H	32	59.1	-3.1
6	20355.00	45.0 AV	54.0	-9.0	1.07 H	32	48.1	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	108.9 PK			1.02 V	290	101.9	7.0
2	*6785.00	95.9 AV			1.02 V	290	88.9	7.0
3	#13570.00	57.6 PK	88.2	-30.6	2.54 V	139	43.0	14.6
4	#13570.00	46.3 AV	68.2	-21.9	2.54 V	139	31.7	14.6
5	20355.00	56.6 PK	74.0	-17.4	1.88 V	24	59.7	-3.1
6	20355.00	45.9 AV	54.0	-8.1	1.88 V	24	49.0	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	1.08 H	260	74.5	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.08 H	260	62.3	4.3
3	*6025.00	107.4 PK			1.08 H	260	103.2	4.2
4	*6025.00	95.8 AV			1.08 H	260	91.6	4.2
5	12050.00	49.9 PK	74.0	-24.1	1.71 H	120	37.5	12.4
6	12050.00	39.6 AV	54.0	-14.4	1.71 H	120	27.2	12.4
7	18075.00	56.1 PK	74.0	-17.9	1.08 H	44	60.8	-4.7
8	18075.00	44.9 AV	54.0	-9.1	1.08 H	44	49.6	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.6 PK	88.2	-12.6	1.16 V	293	71.3	4.3
2	#5925.00	64.5 AV	68.2	-3.7	1.16 V	293	60.2	4.3
3	*6025.00	105.1 PK			1.16 V	293	100.9	4.2
4	*6025.00	91.8 AV			1.16 V	293	87.6	4.2
5	12050.00	57.5 PK	74.0	-16.5	2.56 V	123	45.1	12.4
6	12050.00	46.2 AV	54.0	-7.8	2.56 V	123	33.8	12.4
7	18075.00	57.5 PK	74.0	-16.5	1.91 V	37	62.2	-4.7
8	18075.00	46.2 AV	54.0	-7.8	1.91 V	37	50.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	109.8 PK			1.10 H	244	105.0	4.8
2	*6185.00	97.4 AV			1.10 H	244	92.6	4.8
3	12370.00	50.1 PK	74.0	-23.9	1.67 H	117	37.8	12.3
4	12370.00	39.6 AV	54.0	-14.4	1.67 H	117	27.3	12.3
5	18555.00	56.3 PK	74.0	-17.7	1.08 H	35	61.2	-4.9
6	18555.00	45.0 AV	54.0	-9.0	1.08 H	35	49.9	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.0 PK			1.22 V	306	102.2	4.8
2	*6185.00	93.5 AV			1.22 V	306	88.7	4.8
3	12370.00	57.1 PK	74.0	-16.9	2.61 V	127	44.8	12.3
4	12370.00	46.1 AV	54.0	-7.9	2.61 V	127	33.8	12.3
5	18555.00	57.0 PK	74.0	-17.0	1.86 V	6	61.9	-4.9
6	18555.00	46.0 AV	54.0	-8.0	1.86 V	6	50.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.3 PK			1.02 H	206	103.2	6.1
2	*6345.00	97.8 AV			1.02 H	206	91.7	6.1
3	12690.00	50.2 PK	74.0	-23.8	1.69 H	127	37.3	12.9
4	12690.00	39.8 AV	54.0	-14.2	1.69 H	127	26.9	12.9
5	19035.00	55.8 PK	74.0	-18.2	1.00 H	40	59.7	-3.9
6	19035.00	44.5 AV	54.0	-9.5	1.00 H	40	48.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.3 PK			1.18 V	295	101.2	6.1
2	*6345.00	93.7 AV			1.18 V	295	87.6	6.1
3	12690.00	57.2 PK	74.0	-16.8	2.64 V	141	44.3	12.9
4	12690.00	45.8 AV	54.0	-8.2	2.64 V	141	32.9	12.9
5	19035.00	57.0 PK	74.0	-17.0	1.92 V	17	60.9	-3.9
6	19035.00	46.1 AV	54.0	-7.9	1.92 V	17	50.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.3 PK			1.04 H	211	102.1	7.2
2	*6665.00	97.5 AV			1.04 H	211	90.3	7.2
3	13330.00	49.9 PK	74.0	-24.1	1.72 H	129	36.1	13.8
4	13330.00	39.6 AV	54.0	-14.4	1.72 H	129	25.8	13.8
5	19995.00	56.3 PK	74.0	-17.7	1.00 H	26	59.9	-3.6
6	19995.00	44.9 AV	54.0	-9.1	1.00 H	26	48.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.7 PK			1.25 V	321	99.5	7.2
2	*6665.00	93.2 AV			1.25 V	321	86.0	7.2
3	13330.00	57.8 PK	74.0	-16.2	2.58 V	144	44.0	13.8
4	13330.00	46.3 AV	54.0	-7.7	2.58 V	144	32.5	13.8
5	19995.00	57.0 PK	74.0	-17.0	1.84 V	31	60.6	-3.6
6	19995.00	45.9 AV	54.0	-8.1	1.84 V	31	49.5	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	85.0 PK	88.2	-3.2	1.26 H	201	80.7	4.3
2	#5925.00	65.3 AV	68.2	-2.9	1.26 H	201	61.0	4.3
3	*5955.00	123.6 PK			1.26 H	201	119.1	4.5
4	*5955.00	112.7 AV			1.26 H	201	108.2	4.5
5	11910.00	50.2 PK	74.0	-23.8	1.73 H	142	38.0	12.2
6	11910.00	39.7 AV	54.0	-14.3	1.73 H	142	27.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	1.03 H	41	34.4	21.9
8	17865.00	45.0 AV	54.0	-9.0	1.03 H	41	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.5 PK	88.2	-4.7	1.08 V	301	79.2	4.3
2	#5925.00	64.2 AV	68.2	-4.0	1.08 V	301	59.9	4.3
3	*5955.00	122.1 PK			1.08 V	301	117.6	4.5
4	*5955.00	111.9 AV			1.08 V	301	107.4	4.5
5	11910.00	58.0 PK	74.0	-16.0	2.60 V	144	45.8	12.2
6	11910.00	46.6 AV	54.0	-7.4	2.60 V	144	34.4	12.2
7	17865.00	56.8 PK	74.0	-17.2	1.79 V	37	34.9	21.9
8	17865.00	45.4 AV	54.0	-8.6	1.79 V	37	23.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.2 PK			1.26 H	201	118.4	4.8
2	*6195.00	112.2 AV			1.26 H	201	107.4	4.8
3	12390.00	49.6 PK	74.0	-24.4	1.73 H	129	37.3	12.3
4	12390.00	39.4 AV	54.0	-14.6	1.73 H	129	27.1	12.3
5	18585.00	56.0 PK	74.0	-18.0	1.03 H	41	61.0	-5.0
6	18585.00	44.6 AV	54.0	-9.4	1.03 H	41	49.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.0 PK			1.11 V	317	117.2	4.8
2	*6195.00	111.9 AV			1.11 V	317	107.1	4.8
3	12390.00	57.7 PK	74.0	-16.3	2.64 V	148	45.4	12.3
4	12390.00	46.2 AV	54.0	-7.8	2.64 V	148	33.9	12.3
5	18585.00	57.1 PK	74.0	-16.9	1.83 V	41	62.1	-5.0
6	18585.00	46.1 AV	54.0	-7.9	1.83 V	41	51.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.6 PK			1.21 H	199	117.2	6.4
2	*6415.00	112.6 AV			1.21 H	199	106.2	6.4
3	#12830.00	49.5 PK	88.2	-38.7	1.70 H	142	36.5	13.0
4	#12830.00	39.4 AV	68.2	-28.8	1.70 H	142	26.4	13.0
5	19245.00	55.8 PK	74.0	-18.2	1.02 H	27	59.6	-3.8
6	19245.00	44.7 AV	54.0	-9.3	1.02 H	27	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			1.11 V	288	115.8	6.4
2	*6415.00	111.7 AV			1.11 V	288	105.3	6.4
3	#12830.00	58.1 PK	88.2	-30.1	2.54 V	132	45.1	13.0
4	#12830.00	46.3 AV	68.2	-21.9	2.54 V	132	33.3	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.79 V	21	61.1	-3.8
6	19245.00	46.3 AV	54.0	-7.7	1.79 V	21	50.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.6 PK			1.25 H	198	116.7	6.9
2	*6535.00	112.6 AV			1.25 H	198	105.7	6.9
3	#13070.00	49.5 PK	88.2	-38.7	1.67 H	114	36.3	13.2
4	#13070.00	39.5 AV	68.2	-28.7	1.67 H	114	26.3	13.2
5	19605.00	56.6 PK	74.0	-17.4	1.00 H	11	60.6	-4.0
6	19605.00	45.2 AV	54.0	-8.8	1.00 H	11	49.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.7 PK			1.05 V	317	114.8	6.9
2	*6535.00	111.7 AV			1.05 V	317	104.8	6.9
3	#13070.00	57.8 PK	88.2	-30.4	2.63 V	159	44.6	13.2
4	#13070.00	46.4 AV	68.2	-21.8	2.63 V	159	33.2	13.2
5	19605.00	56.6 PK	74.0	-17.4	1.87 V	37	60.6	-4.0
6	19605.00	45.5 AV	54.0	-8.5	1.87 V	37	49.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.7 PK			1.23 H	193	115.5	7.2
2	*6695.00	111.9 AV			1.23 H	193	104.7	7.2
3	13390.00	50.2 PK	74.0	-23.8	1.73 H	139	36.2	14.0
4	13390.00	39.7 AV	54.0	-14.3	1.73 H	139	25.7	14.0
5	20085.00	56.1 PK	74.0	-17.9	1.02 H	25	59.6	-3.5
6	20085.00	44.9 AV	54.0	-9.1	1.02 H	25	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.1 PK			1.02 V	332	113.9	7.2
2	*6695.00	111.4 AV			1.02 V	332	104.2	7.2
3	13390.00	57.2 PK	74.0	-16.8	2.61 V	132	43.2	14.0
4	13390.00	45.9 AV	54.0	-8.1	2.61 V	132	31.9	14.0
5	20085.00	57.1 PK	74.0	-16.9	1.79 V	29	60.6	-3.5
6	20085.00	45.9 AV	54.0	-8.1	1.79 V	29	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.0 PK			1.24 H	179	114.8	7.2
2	*6855.00	111.2 AV			1.24 H	179	104.0	7.2
3	#13710.00	50.7 PK	88.2	-37.5	1.74 H	116	35.5	15.2
4	#13710.00	40.1 AV	68.2	-28.1	1.74 H	116	24.9	15.2
5	20565.00	55.9 PK	74.0	-18.1	1.01 H	23	59.2	-3.3
6	20565.00	44.4 AV	54.0	-9.6	1.01 H	23	47.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.2 PK			1.17 V	287	114.0	7.2
2	*6855.00	111.3 AV			1.17 V	287	104.1	7.2
3	#13710.00	57.9 PK	88.2	-30.3	2.61 V	153	42.7	15.2
4	#13710.00	46.6 AV	68.2	-21.6	2.61 V	153	31.4	15.2
5	20565.00	56.8 PK	74.0	-17.2	1.86 V	18	60.1	-3.3
6	20565.00	45.5 AV	54.0	-8.5	1.86 V	18	48.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.21 H	205	78.0	4.3
2	#5925.00	65.0 AV	68.2	-3.2	1.21 H	205	60.7	4.3
3	*5955.00	120.0 PK			1.21 H	205	115.5	4.5
4	*5955.00	111.2 AV			1.21 H	205	106.7	4.5
5	11910.00	50.1 PK	74.0	-23.9	1.78 H	115	37.9	12.2
6	11910.00	39.8 AV	54.0	-14.2	1.78 H	115	27.6	12.2
7	17865.00	56.8 PK	74.0	-17.2	1.00 H	41	34.9	21.9
8	17865.00	45.1 AV	54.0	-8.9	1.00 H	41	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.5 PK	88.2	-4.7	1.10 V	284	79.2	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.10 V	284	62.3	4.3
3	*5955.00	120.0 PK			1.10 V	284	115.5	4.5
4	*5955.00	110.7 AV			1.10 V	284	106.2	4.5
5	11910.00	57.9 PK	74.0	-16.1	2.64 V	129	45.7	12.2
6	11910.00	46.4 AV	54.0	-7.6	2.64 V	129	34.2	12.2
7	17865.00	57.2 PK	74.0	-16.8	1.79 V	47	35.3	21.9
8	17865.00	46.2 AV	54.0	-7.8	1.79 V	47	24.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			1.24 H	190	115.1	4.8
2	*6195.00	110.8 AV			1.24 H	190	106.0	4.8
3	12390.00	49.8 PK	74.0	-24.2	1.68 H	117	37.5	12.3
4	12390.00	39.6 AV	54.0	-14.4	1.68 H	117	27.3	12.3
5	18585.00	56.2 PK	74.0	-17.8	1.00 H	15	61.2	-5.0
6	18585.00	45.1 AV	54.0	-8.9	1.00 H	15	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.6 PK			1.05 V	271	114.8	4.8
2	*6195.00	110.5 AV			1.05 V	271	105.7	4.8
3	12390.00	58.1 PK	74.0	-15.9	2.64 V	154	45.8	12.3
4	12390.00	46.3 AV	54.0	-7.7	2.64 V	154	34.0	12.3
5	18585.00	57.1 PK	74.0	-16.9	1.84 V	35	62.1	-5.0
6	18585.00	46.2 AV	54.0	-7.8	1.84 V	35	51.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.2 PK			1.25 H	190	113.8	6.4
2	*6415.00	111.7 AV			1.25 H	190	105.3	6.4
3	#12830.00	49.5 PK	88.2	-38.7	1.76 H	115	36.5	13.0
4	#12830.00	39.2 AV	68.2	-29.0	1.76 H	115	26.2	13.0
5	19245.00	56.1 PK	74.0	-17.9	1.00 H	15	59.9	-3.8
6	19245.00	44.6 AV	54.0	-9.4	1.00 H	15	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.5 PK			1.12 V	272	114.1	6.4
2	*6415.00	111.1 AV			1.12 V	272	104.7	6.4
3	#12830.00	58.1 PK	88.2	-30.1	2.57 V	140	45.1	13.0
4	#12830.00	46.3 AV	68.2	-21.9	2.57 V	140	33.3	13.0
5	19245.00	57.0 PK	74.0	-17.0	1.88 V	43	60.8	-3.8
6	19245.00	45.7 AV	54.0	-8.3	1.88 V	43	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.9 PK			1.27 H	211	113.0	6.9
2	*6535.00	111.0 AV			1.27 H	211	104.1	6.9
3	#13070.00	50.2 PK	88.2	-38.0	1.76 H	140	37.0	13.2
4	#13070.00	39.6 AV	68.2	-28.6	1.76 H	140	26.4	13.2
5	19605.00	56.3 PK	74.0	-17.7	1.00 H	30	60.3	-4.0
6	19605.00	44.7 AV	54.0	-9.3	1.00 H	30	48.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.9 PK			1.13 V	297	113.0	6.9
2	*6535.00	110.6 AV			1.13 V	297	103.7	6.9
3	#13070.00	57.1 PK	88.2	-31.1	2.56 V	148	43.9	13.2
4	#13070.00	45.9 AV	68.2	-22.3	2.56 V	148	32.7	13.2
5	19605.00	56.8 PK	74.0	-17.2	1.86 V	19	60.8	-4.0
6	19605.00	45.6 AV	54.0	-8.4	1.86 V	19	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.5 PK			1.32 H	193	112.3	7.2
2	*6695.00	110.7 AV			1.32 H	193	103.5	7.2
3	13390.00	50.3 PK	74.0	-23.7	1.77 H	113	36.3	14.0
4	13390.00	39.7 AV	54.0	-14.3	1.77 H	113	25.7	14.0
5	20085.00	55.5 PK	74.0	-18.5	1.00 H	14	59.0	-3.5
6	20085.00	44.4 AV	54.0	-9.6	1.00 H	14	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.5 PK			1.06 V	277	112.3	7.2
2	*6695.00	110.0 AV			1.06 V	277	102.8	7.2
3	13390.00	58.6 PK	74.0	-15.4	2.53 V	158	44.6	14.0
4	13390.00	46.8 AV	54.0	-7.2	2.53 V	158	32.8	14.0
5	20085.00	56.4 PK	74.0	-17.6	1.86 V	39	59.9	-3.5
6	20085.00	45.6 AV	54.0	-8.4	1.86 V	39	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.7 PK			1.30 H	222	111.5	7.2
2	*6855.00	110.0 AV			1.30 H	222	102.8	7.2
3	#13710.00	50.3 PK	88.2	-37.9	1.70 H	141	35.1	15.2
4	#13710.00	39.8 AV	68.2	-28.4	1.70 H	141	24.6	15.2
5	20565.00	56.5 PK	74.0	-17.5	1.00 H	15	59.8	-3.3
6	20565.00	45.1 AV	54.0	-8.9	1.00 H	15	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.9 PK			1.07 V	269	111.7	7.2
2	*6855.00	109.4 AV			1.07 V	269	102.2	7.2
3	#13710.00	57.5 PK	88.2	-30.7	2.55 V	140	42.3	15.2
4	#13710.00	46.1 AV	68.2	-22.1	2.55 V	140	30.9	15.2
5	20565.00	57.0 PK	74.0	-17.0	1.79 V	34	60.3	-3.3
6	20565.00	45.9 AV	54.0	-8.1	1.79 V	34	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.5 PK	88.2	-13.7	1.28 H	205	70.2	4.3
2	#5925.00	56.9 AV	68.2	-11.3	1.28 H	205	52.6	4.3
3	*5955.00	119.5 PK			1.28 H	205	115.0	4.5
4	*5955.00	108.2 AV			1.28 H	205	103.7	4.5
5	11910.00	50.2 PK	74.0	-23.8	1.77 H	115	38.0	12.2
6	11910.00	39.6 AV	54.0	-14.4	1.77 H	115	27.4	12.2
7	17865.00	56.7 PK	74.0	-17.3	1.00 H	31	34.8	21.9
8	17865.00	45.1 AV	54.0	-8.9	1.00 H	31	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.04 V	284	70.8	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.04 V	284	53.1	4.3
3	*5955.00	118.6 PK			1.04 V	284	114.1	4.5
4	*5955.00	107.7 AV			1.04 V	284	103.2	4.5
5	11910.00	58.1 PK	74.0	-15.9	2.60 V	143	45.9	12.2
6	11910.00	46.7 AV	54.0	-7.3	2.60 V	143	34.5	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.86 V	19	35.2	21.9
8	17865.00	46.1 AV	54.0	-7.9	1.86 V	19	24.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.29 H	220	114.7	4.8
2	*6195.00	108.3 AV			1.29 H	220	103.5	4.8
3	12390.00	50.5 PK	74.0	-23.5	1.72 H	113	38.2	12.3
4	12390.00	39.9 AV	54.0	-14.1	1.72 H	113	27.6	12.3
5	18585.00	55.8 PK	74.0	-18.2	1.02 H	37	60.8	-5.0
6	18585.00	44.6 AV	54.0	-9.4	1.02 H	37	49.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.9 PK			1.09 V	297	114.1	4.8
2	*6195.00	107.9 AV			1.09 V	297	103.1	4.8
3	12390.00	57.6 PK	74.0	-16.4	2.55 V	137	45.3	12.3
4	12390.00	46.0 AV	54.0	-8.0	2.55 V	137	33.7	12.3
5	18585.00	56.4 PK	74.0	-17.6	1.86 V	44	61.4	-5.0
6	18585.00	45.5 AV	54.0	-8.5	1.86 V	44	50.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.2 PK			1.23 H	209	112.8	6.4
2	*6415.00	108.1 AV			1.23 H	209	101.7	6.4
3	#12830.00	50.1 PK	88.2	-38.1	1.75 H	144	37.1	13.0
4	#12830.00	39.7 AV	68.2	-28.5	1.75 H	144	26.7	13.0
5	19245.00	56.0 PK	74.0	-18.0	1.03 H	36	59.8	-3.8
6	19245.00	44.6 AV	54.0	-9.4	1.03 H	36	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.4 PK			1.07 V	276	112.0	6.4
2	*6415.00	107.7 AV			1.07 V	276	101.3	6.4
3	#12830.00	58.5 PK	88.2	-29.7	2.56 V	143	45.5	13.0
4	#12830.00	46.7 AV	68.2	-21.5	2.56 V	143	33.7	13.0
5	19245.00	57.2 PK	74.0	-16.8	1.89 V	17	61.0	-3.8
6	19245.00	46.2 AV	54.0	-7.8	1.89 V	17	50.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.2 PK			1.22 H	217	113.3	6.9
2	*6535.00	108.7 AV			1.22 H	217	101.8	6.9
3	#13070.00	50.1 PK	88.2	-38.1	1.67 H	131	36.9	13.2
4	#13070.00	39.8 AV	68.2	-28.4	1.67 H	131	26.6	13.2
5	19605.00	55.9 PK	74.0	-18.1	1.00 H	11	59.9	-4.0
6	19605.00	44.5 AV	54.0	-9.5	1.00 H	11	48.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.9 PK			1.08 V	277	112.0	6.9
2	*6535.00	108.1 AV			1.08 V	277	101.2	6.9
3	#13070.00	57.7 PK	88.2	-30.5	2.52 V	135	44.5	13.2
4	#13070.00	46.3 AV	68.2	-21.9	2.52 V	135	33.1	13.2
5	19605.00	57.2 PK	74.0	-16.8	1.85 V	29	61.2	-4.0
6	19605.00	46.1 AV	54.0	-7.9	1.85 V	29	50.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.5 PK			1.32 H	198	112.3	7.2
2	*6695.00	108.2 AV			1.32 H	198	101.0	7.2
3	13390.00	49.9 PK	74.0	-24.1	1.76 H	119	35.9	14.0
4	13390.00	39.8 AV	54.0	-14.2	1.76 H	119	25.8	14.0
5	20085.00	56.0 PK	74.0	-18.0	1.00 H	34	59.5	-3.5
6	20085.00	44.7 AV	54.0	-9.3	1.00 H	34	48.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.5 PK			1.09 V	287	111.3	7.2
2	*6695.00	107.3 AV			1.09 V	287	100.1	7.2
3	13390.00	57.7 PK	74.0	-16.3	2.61 V	160	43.7	14.0
4	13390.00	46.2 AV	54.0	-7.8	2.61 V	160	32.2	14.0
5	20085.00	56.8 PK	74.0	-17.2	1.81 V	40	60.3	-3.5
6	20085.00	45.6 AV	54.0	-8.4	1.81 V	40	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.8 PK			1.31 H	209	111.6	7.2
2	*6855.00	107.6 AV			1.31 H	209	100.4	7.2
3	#13710.00	50.3 PK	88.2	-37.9	1.70 H	117	35.1	15.2
4	#13710.00	39.8 AV	68.2	-28.4	1.70 H	117	24.6	15.2
5	20565.00	56.1 PK	74.0	-17.9	1.00 H	37	59.4	-3.3
6	20565.00	44.7 AV	54.0	-9.3	1.00 H	37	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.07 V	272	110.6	7.2
2	*6855.00	106.7 AV			1.07 V	272	99.5	7.2
3	#13710.00	57.3 PK	88.2	-30.9	2.59 V	130	42.1	15.2
4	#13710.00	46.0 AV	68.2	-22.2	2.59 V	130	30.8	15.2
5	20565.00	56.4 PK	74.0	-17.6	1.82 V	44	59.7	-3.3
6	20565.00	45.5 AV	54.0	-8.5	1.82 V	44	48.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	84.3 PK	88.2	-3.9	1.20 H	8	80.0	4.3
2	#5925.00	55.6 AV	68.2	-12.6	1.20 H	8	51.3	4.3
3	*5955.00	119.2 PK			1.20 H	8	114.7	4.5
4	*5955.00	109.6 AV			1.20 H	8	105.1	4.5
5	11910.00	49.5 PK	74.0	-24.5	1.71 H	116	37.3	12.2
6	11910.00	39.5 AV	54.0	-14.5	1.71 H	116	27.3	12.2
7	17865.00	56.0 PK	74.0	-18.0	1.00 H	15	34.1	21.9
8	17865.00	44.8 AV	54.0	-9.2	1.00 H	15	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.3 PK	88.2	-5.9	1.13 V	286	78.0	4.3
2	#5925.00	55.3 AV	68.2	-12.9	1.13 V	286	51.0	4.3
3	*5955.00	118.7 PK			1.13 V	286	114.2	4.5
4	*5955.00	109.5 AV			1.13 V	286	105.0	4.5
5	11910.00	58.0 PK	74.0	-16.0	2.61 V	143	45.8	12.2
6	11910.00	46.7 AV	54.0	-7.3	2.61 V	143	34.5	12.2
7	17865.00	56.5 PK	74.0	-17.5	1.88 V	20	34.6	21.9
8	17865.00	45.7 AV	54.0	-8.3	1.88 V	20	23.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.2 PK			1.19 H	2	112.0	7.2
2	*6695.00	109.5 AV			1.19 H	2	102.3	7.2
3	13390.00	49.6 PK	74.0	-24.4	1.67 H	126	35.6	14.0
4	13390.00	39.7 AV	54.0	-14.3	1.67 H	126	25.7	14.0
5	20085.00	55.6 PK	74.0	-18.4	1.03 H	21	59.1	-3.5
6	20085.00	44.4 AV	54.0	-9.6	1.03 H	21	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.3 PK			1.16 V	288	111.1	7.2
2	*6695.00	109.1 AV			1.16 V	288	101.9	7.2
3	13390.00	57.4 PK	74.0	-16.6	2.59 V	132	43.4	14.0
4	13390.00	46.4 AV	54.0	-7.6	2.59 V	132	32.4	14.0
5	20085.00	56.9 PK	74.0	-17.1	1.94 V	32	60.4	-3.5
6	20085.00	46.0 AV	54.0	-8.0	1.94 V	32	49.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.3 PK	88.2	-14.9	1.14 H	7	69.0	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.14 H	7	53.1	4.3
3	*5955.00	117.8 PK			1.14 H	7	113.3	4.5
4	*5955.00	106.9 AV			1.14 H	7	102.4	4.5
5	11910.00	49.5 PK	74.0	-24.5	1.74 H	122	37.3	12.2
6	11910.00	39.3 AV	54.0	-14.7	1.74 H	122	27.1	12.2
7	17865.00	56.2 PK	74.0	-17.8	1.03 H	10	34.3	21.9
8	17865.00	44.6 AV	54.0	-9.4	1.03 H	10	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.16 V	284	69.4	4.3
2	#5925.00	57.4 AV	68.2	-10.8	1.16 V	284	53.1	4.3
3	*5955.00	116.5 PK			1.16 V	284	112.0	4.5
4	*5955.00	106.3 AV			1.16 V	284	101.8	4.5
5	11910.00	58.4 PK	74.0	-15.6	2.56 V	138	46.2	12.2
6	11910.00	46.6 AV	54.0	-7.4	2.56 V	138	34.4	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.86 V	19	35.2	21.9
8	17865.00	46.2 AV	54.0	-7.8	1.86 V	19	24.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.1 PK			1.11 H	4	110.9	7.2
2	*6695.00	106.9 AV			1.11 H	4	99.7	7.2
3	13390.00	49.2 PK	74.0	-24.8	1.69 H	123	35.2	14.0
4	13390.00	38.9 AV	54.0	-15.1	1.69 H	123	24.9	14.0
5	20085.00	56.0 PK	74.0	-18.0	1.00 H	17	59.5	-3.5
6	20085.00	44.1 AV	54.0	-9.9	1.00 H	17	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.4 PK			1.12 V	274	109.2	7.2
2	*6695.00	106.0 AV			1.12 V	274	98.8	7.2
3	13390.00	58.7 PK	74.0	-15.3	2.56 V	126	44.7	14.0
4	13390.00	46.9 AV	54.0	-7.1	2.56 V	126	32.9	14.0
5	20085.00	57.0 PK	74.0	-17.0	1.86 V	25	60.5	-3.5
6	20085.00	46.2 AV	54.0	-7.8	1.86 V	25	49.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.0 PK	88.2	-11.2	1.00 H	0	72.7	4.3
2	#5925.00	64.6 AV	68.2	-3.6	1.00 H	0	60.3	4.3
3	*5985.00	108.9 PK			1.13 H	64	104.5	4.4
4	*5985.00	97.7 AV			1.13 H	64	93.3	4.4
5	11970.00	49.6 PK	74.0	-24.4	1.75 H	142	37.4	12.2
6	11970.00	39.5 AV	54.0	-14.5	1.75 H	142	27.3	12.2
7	17955.00	56.6 PK	74.0	-17.4	1.00 H	12	33.2	23.4
8	17955.00	45.3 AV	54.0	-8.7	1.00 H	12	21.9	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.1 PK	88.2	-12.1	1.28 V	289	71.8	4.3
2	#5925.00	62.9 AV	68.2	-5.3	1.28 V	289	58.6	4.3
3	*5985.00	107.7 PK			1.28 V	289	103.3	4.4
4	*5985.00	96.5 AV			1.28 V	289	92.1	4.4
5	11970.00	57.9 PK	74.0	-16.1	2.57 V	156	45.7	12.2
6	11970.00	46.5 AV	54.0	-7.5	2.57 V	156	34.3	12.2
7	17955.00	56.9 PK	74.0	-17.1	1.84 V	42	33.5	23.4
8	17955.00	46.0 AV	54.0	-8.0	1.84 V	42	22.6	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.2 PK			1.11 H	77	102.0	7.2
2	*6705.00	97.9 AV			1.11 H	77	90.7	7.2
3	#13410.00	49.9 PK	88.2	-38.3	1.75 H	137	35.7	14.2
4	#13410.00	39.6 AV	68.2	-28.6	1.75 H	137	25.4	14.2
5	20115.00	56.8 PK	74.0	-17.2	1.00 H	4	60.3	-3.5
6	20115.00	45.3 AV	54.0	-8.7	1.00 H	4	48.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.25 V	287	100.2	7.2
2	*6705.00	96.4 AV			1.25 V	287	89.2	7.2
3	#13410.00	57.9 PK	88.2	-30.3	2.60 V	158	43.7	14.2
4	#13410.00	46.8 AV	68.2	-21.4	2.60 V	158	32.6	14.2
5	20115.00	56.8 PK	74.0	-17.2	1.84 V	50	60.3	-3.5
6	20115.00	45.6 AV	54.0	-8.4	1.84 V	50	49.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.0 PK	88.2	-7.2	1.00 H	0	76.7	4.3
2	#5925.00	65.4 AV	68.2	-2.8	1.00 H	0	61.1	4.3
3	*6025.00	107.5 PK			1.12 H	64	103.3	4.2
4	*6025.00	96.0 AV			1.12 H	64	91.8	4.2
5	12050.00	50.5 PK	74.0	-23.5	1.68 H	128	38.1	12.4
6	12050.00	40.1 AV	54.0	-13.9	1.68 H	128	27.7	12.4
7	18075.00	56.4 PK	74.0	-17.6	1.00 H	13	61.1	-4.7
8	18075.00	45.3 AV	54.0	-8.7	1.00 H	13	50.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.6 PK	88.2	-9.6	1.00 V	0	74.3	4.3
2	#5925.00	63.7 AV	68.2	-4.5	1.00 V	0	59.4	4.3
3	*6025.00	105.1 PK			1.06 V	287	100.9	4.2
4	*6025.00	94.0 AV			1.06 V	287	89.8	4.2
5	12050.00	58.2 PK	74.0	-15.8	2.54 V	153	45.8	12.4
6	12050.00	46.4 AV	54.0	-7.6	2.54 V	153	34.0	12.4
7	18075.00	57.0 PK	74.0	-17.0	1.82 V	20	61.7	-4.7
8	18075.00	46.1 AV	54.0	-7.9	1.82 V	20	50.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	108.2 PK			1.15 H	68	101.0	7.2
2	*6665.00	96.4 AV			1.15 H	68	89.2	7.2
3	13330.00	50.5 PK	74.0	-23.5	1.70 H	140	36.7	13.8
4	13330.00	39.9 AV	54.0	-14.1	1.70 H	140	26.1	13.8
5	19995.00	57.0 PK	74.0	-17.0	1.00 H	26	60.6	-3.6
6	19995.00	45.7 AV	54.0	-8.3	1.00 H	26	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.7 PK			1.12 V	288	97.5	7.2
2	*6665.00	93.8 AV			1.12 V	288	86.6	7.2
3	13330.00	58.1 PK	74.0	-15.9	2.53 V	156	44.3	13.8
4	13330.00	46.2 AV	54.0	-7.8	2.53 V	156	32.4	13.8
5	19995.00	57.3 PK	74.0	-16.7	1.83 V	25	60.9	-3.6
6	19995.00	46.2 AV	54.0	-7.8	1.83 V	25	49.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 74% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	1.00 H	0	72.2	4.3
2	#5925.00	62.7 AV	68.2	-5.5	1.00 H	0	58.4	4.3
3	*6025.00	106.3 PK			1.12 H	64	102.1	4.2
4	*6025.00	94.7 AV			1.12 H	64	90.5	4.2
5	12050.00	50.1 PK	74.0	-23.9	1.76 H	129	37.7	12.4
6	12050.00	39.9 AV	54.0	-14.1	1.76 H	129	27.5	12.4
7	18075.00	56.0 PK	74.0	-18.0	1.01 H	27	60.7	-4.7
8	18075.00	44.5 AV	54.0	-9.5	1.01 H	27	49.2	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.6 PK	88.2	-12.6	1.00 V	0	71.3	4.3
2	#5925.00	61.5 AV	68.2	-6.7	1.00 V	0	57.2	4.3
3	*6025.00	104.5 PK			1.06 V	287	100.3	4.2
4	*6025.00	92.8 AV			1.06 V	287	88.6	4.2
5	12050.00	57.9 PK	74.0	-16.1	2.61 V	130	45.5	12.4
6	12050.00	46.1 AV	54.0	-7.9	2.61 V	130	33.7	12.4
7	18075.00	57.4 PK	74.0	-16.6	1.82 V	34	62.1	-4.7
8	18075.00	46.3 AV	54.0	-7.7	1.82 V	34	51.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			1.15 H	71	98.9	7.2
2	*6665.00	94.8 AV			1.15 H	71	87.6	7.2
3	13330.00	49.8 PK	74.0	-24.2	1.82 H	114	36.0	13.8
4	13330.00	39.7 AV	54.0	-14.3	1.82 H	114	25.9	13.8
5	19995.00	56.0 PK	74.0	-18.0	1.00 H	19	59.6	-3.6
6	19995.00	44.5 AV	54.0	-9.5	1.00 H	19	48.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.6 PK			1.01 V	281	97.4	7.2
2	*6665.00	92.8 AV			1.01 V	281	85.6	7.2
3	13330.00	58.3 PK	74.0	-15.7	2.62 V	144	44.5	13.8
4	13330.00	46.3 AV	54.0	-7.7	2.62 V	144	32.5	13.8
5	19995.00	57.1 PK	74.0	-16.9	1.83 V	27	60.7	-3.6
6	19995.00	45.9 AV	54.0	-8.1	1.83 V	27	49.5	-3.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


2Tx

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

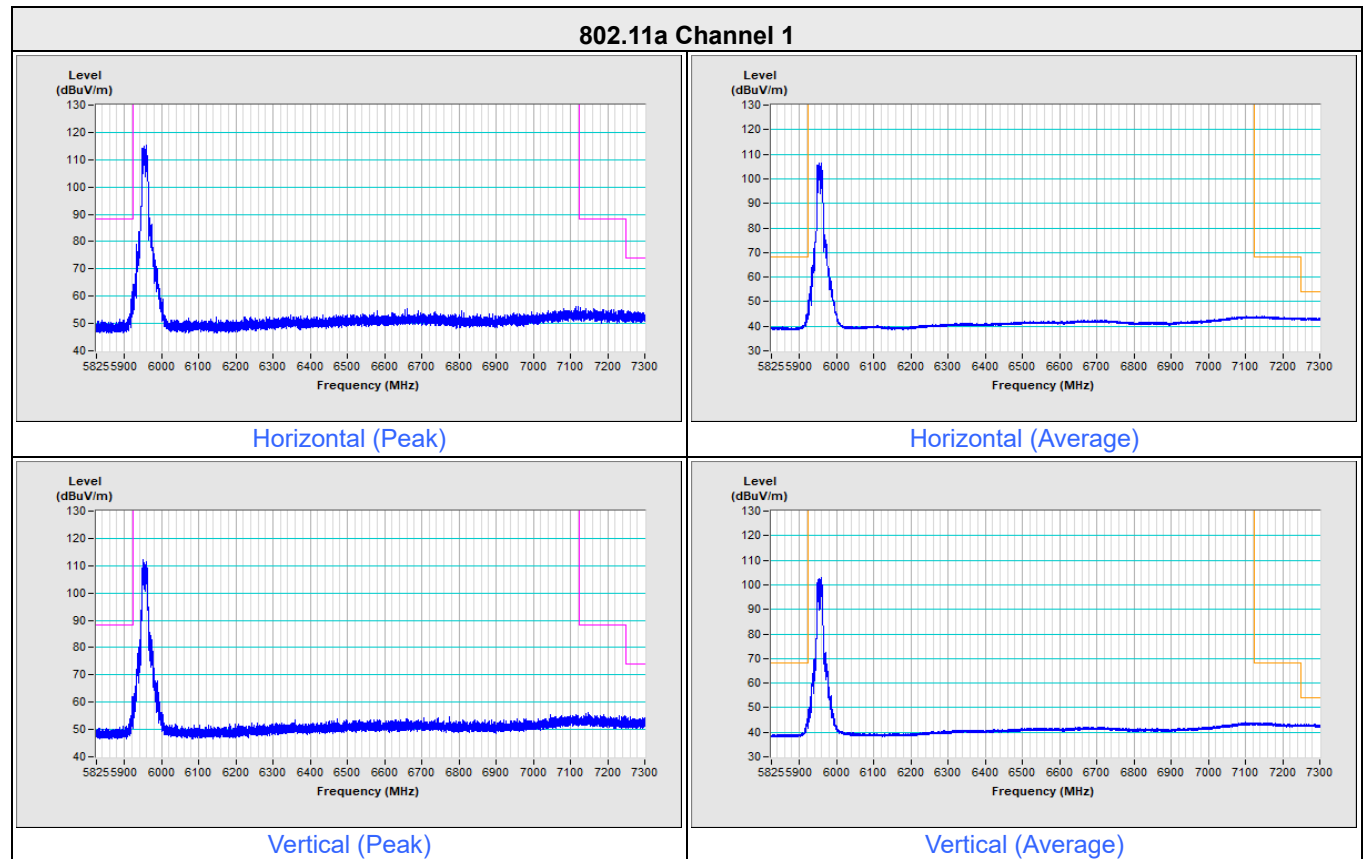


2Tx NSS2

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

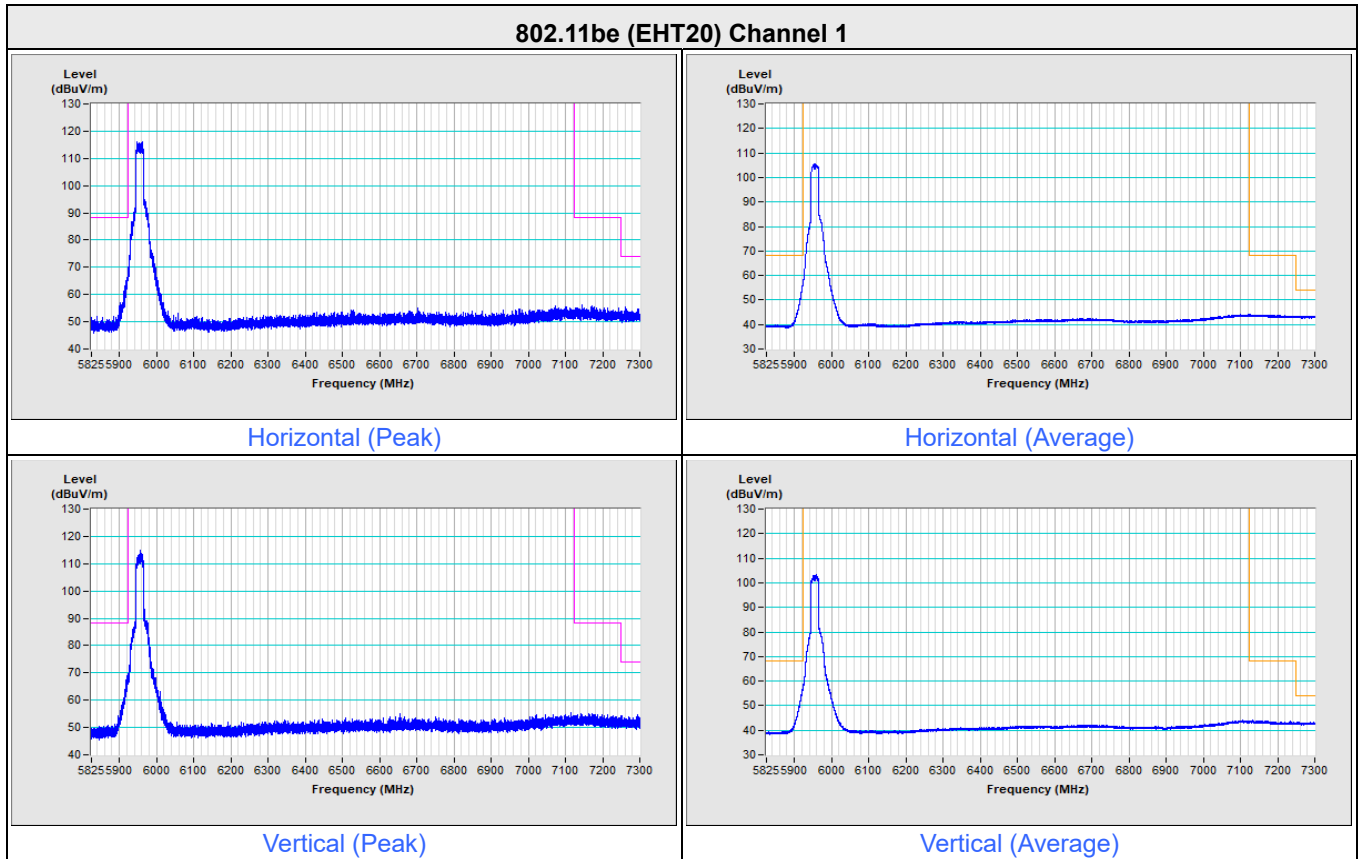


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

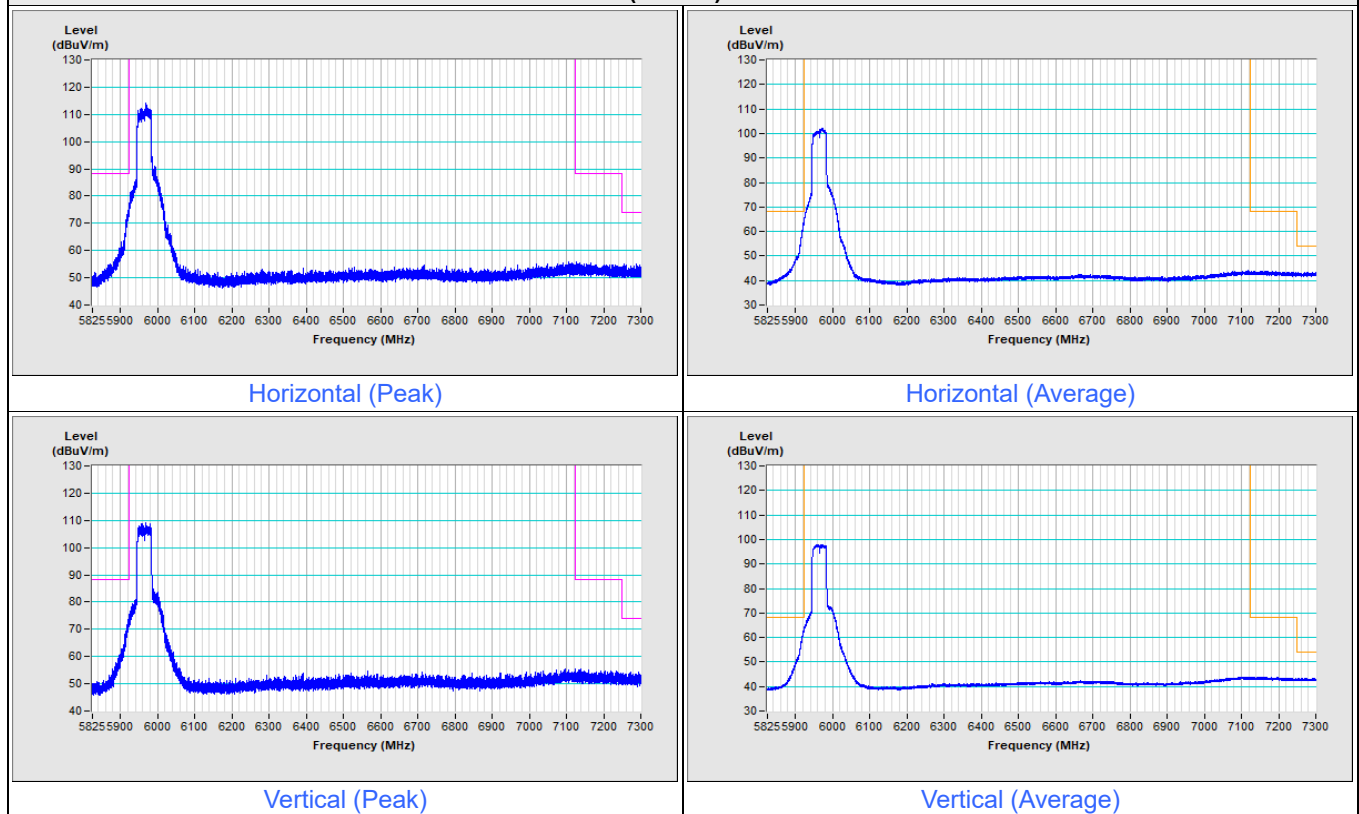


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

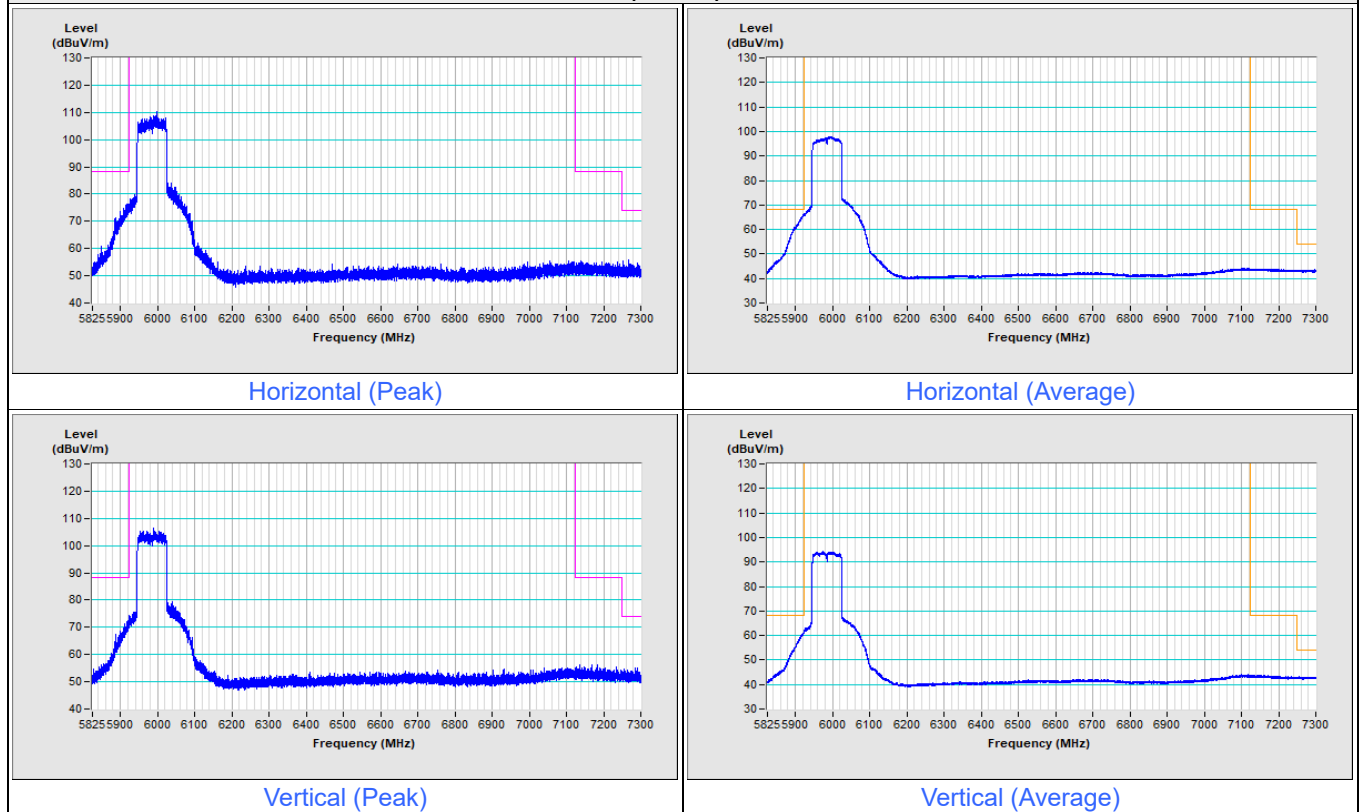


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

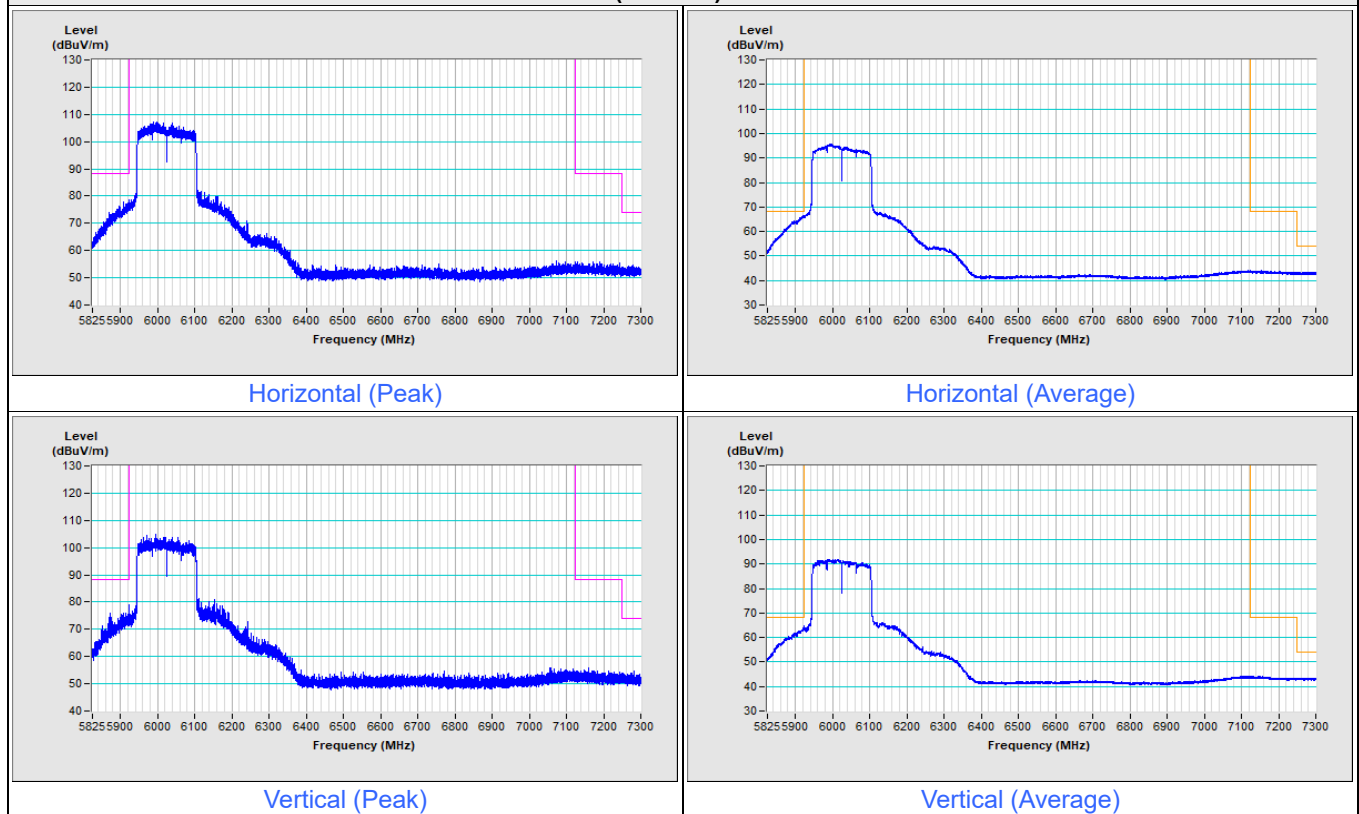


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

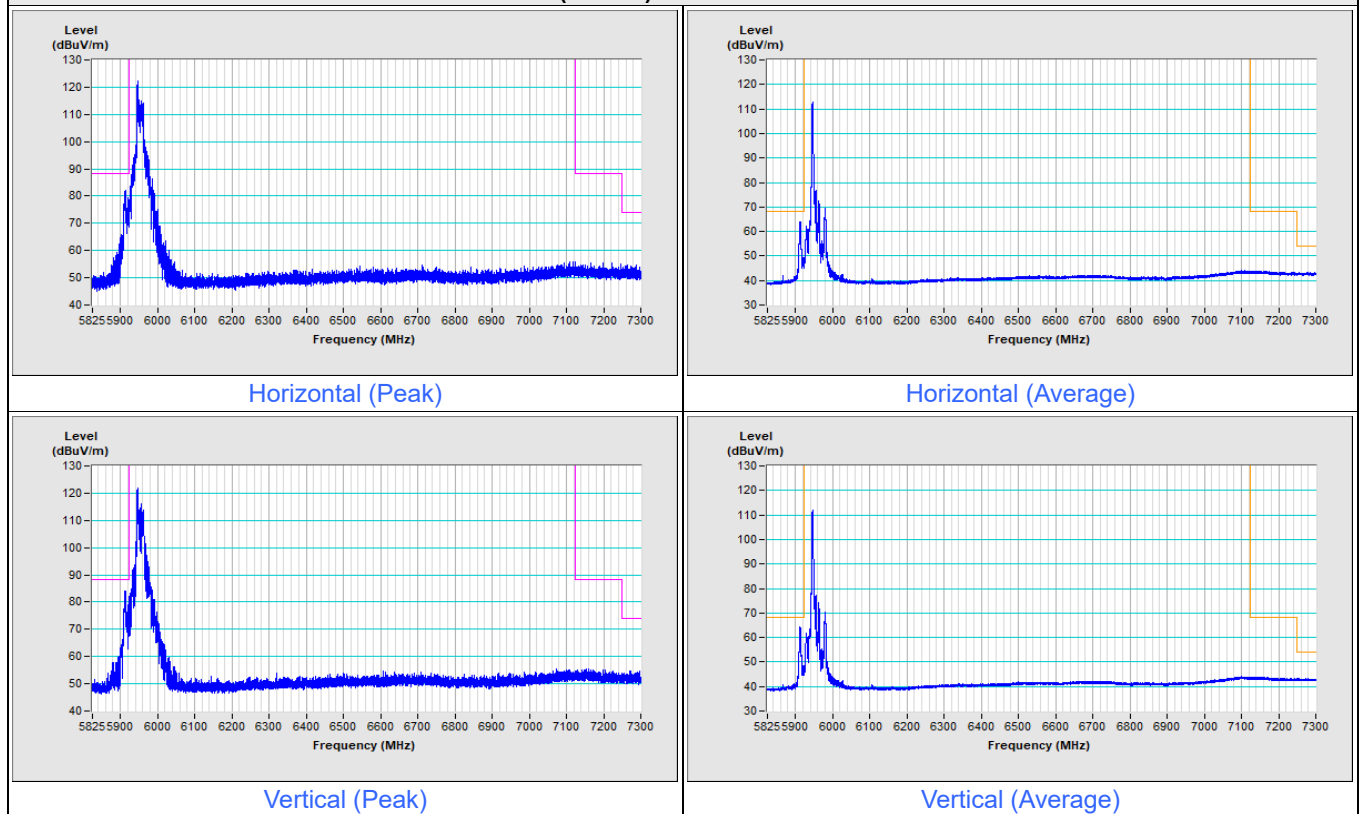


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

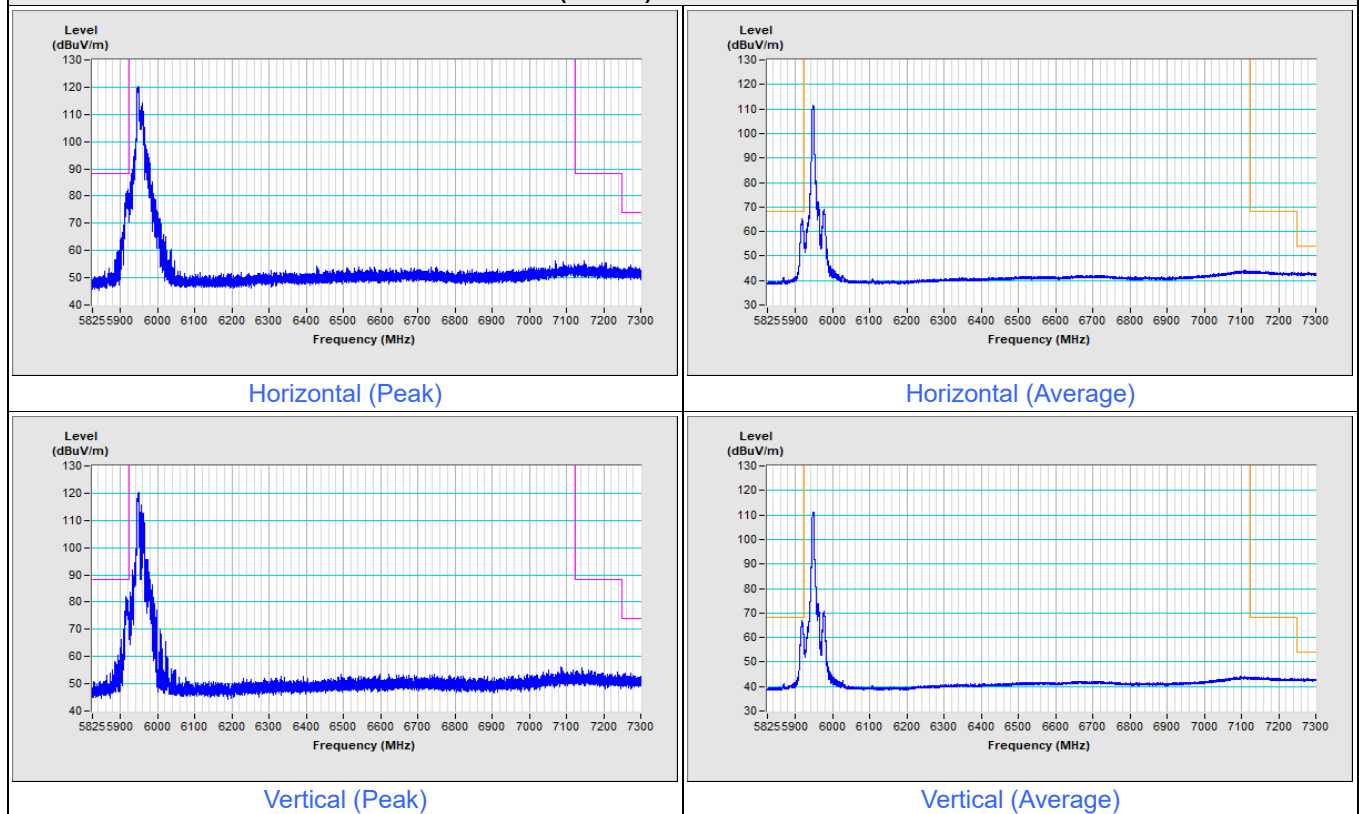


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

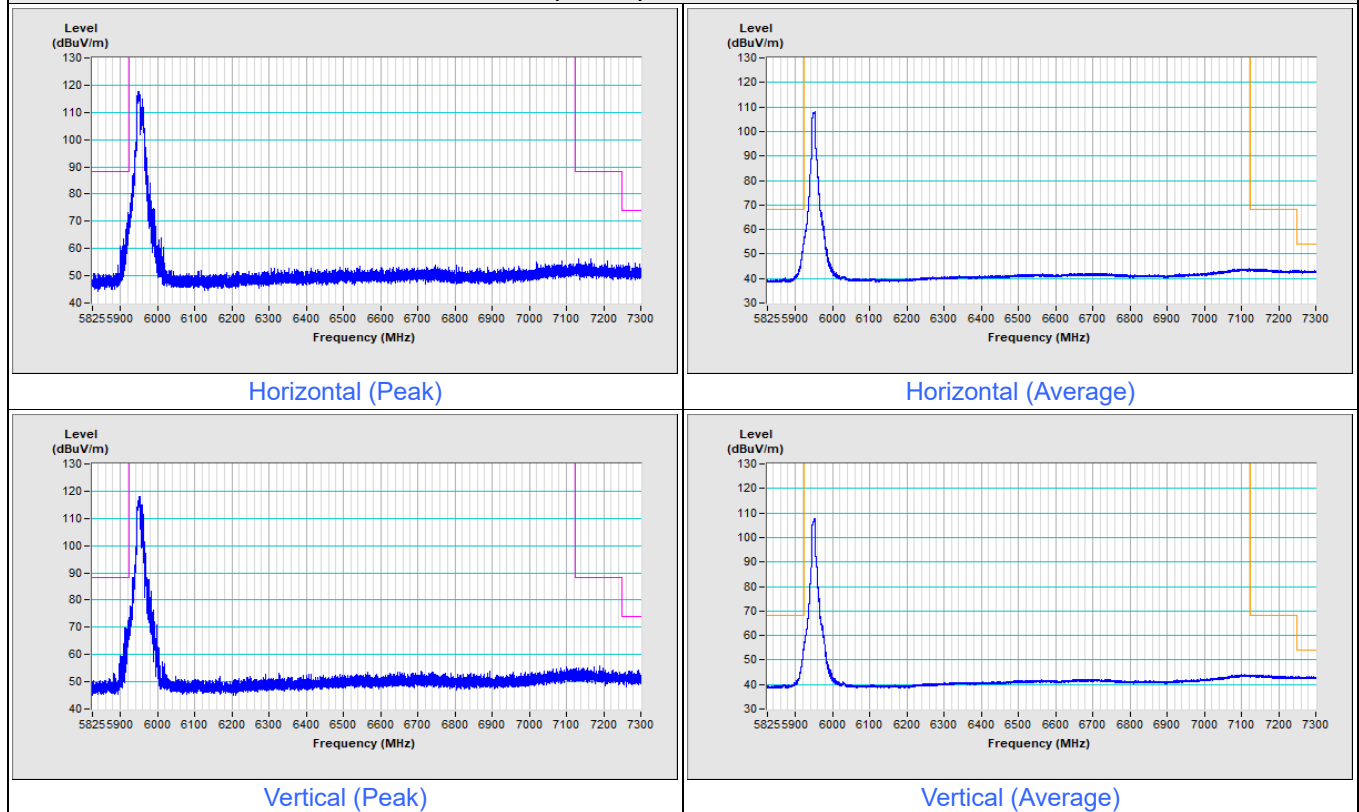


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

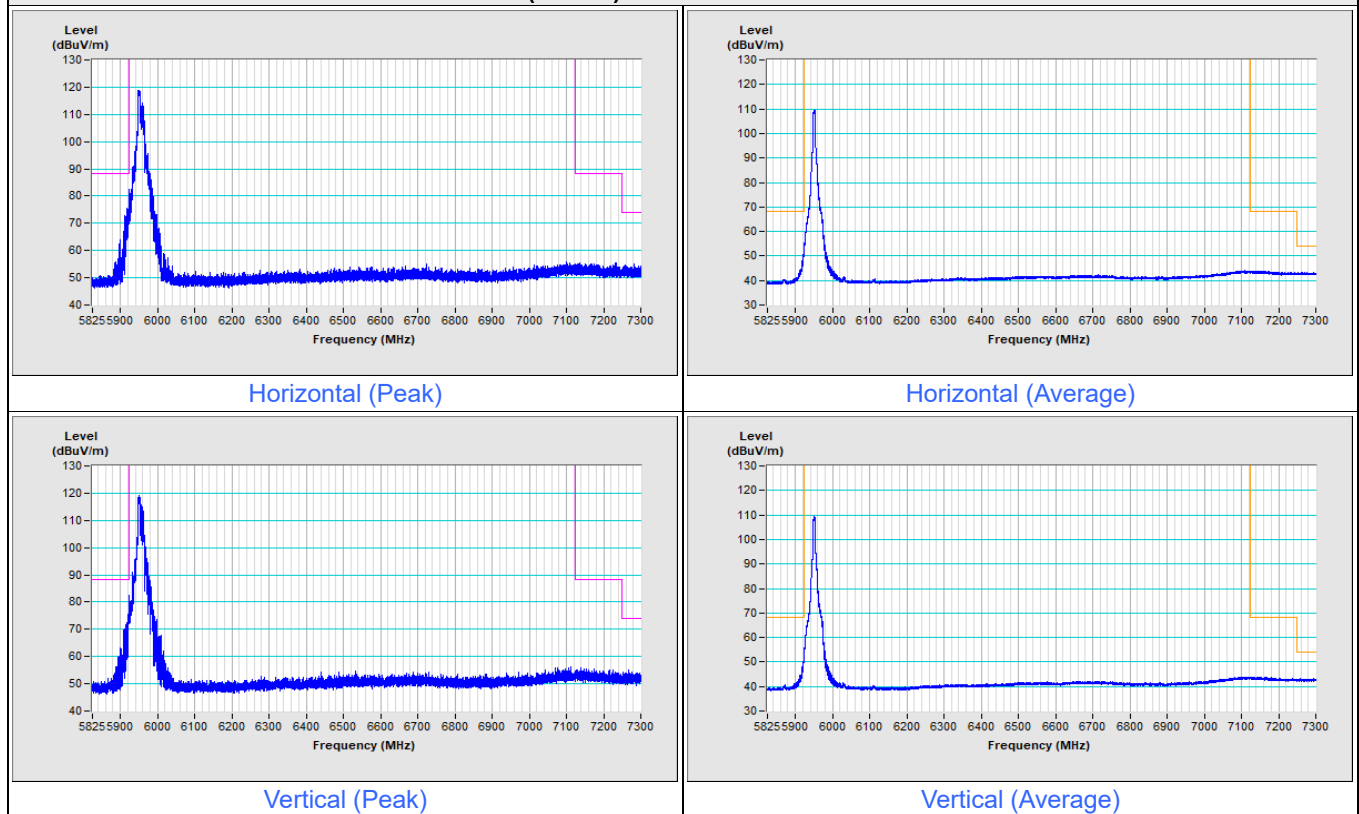


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

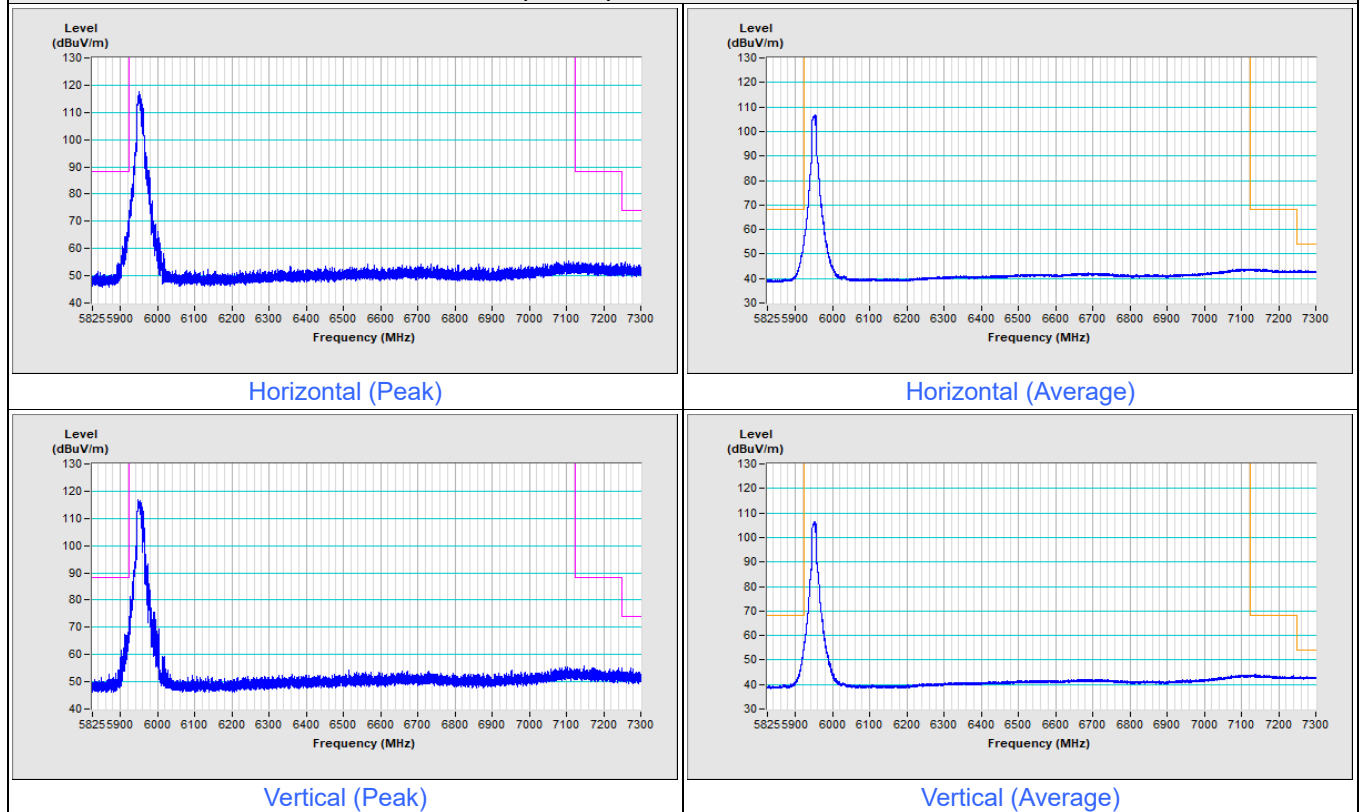


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 7

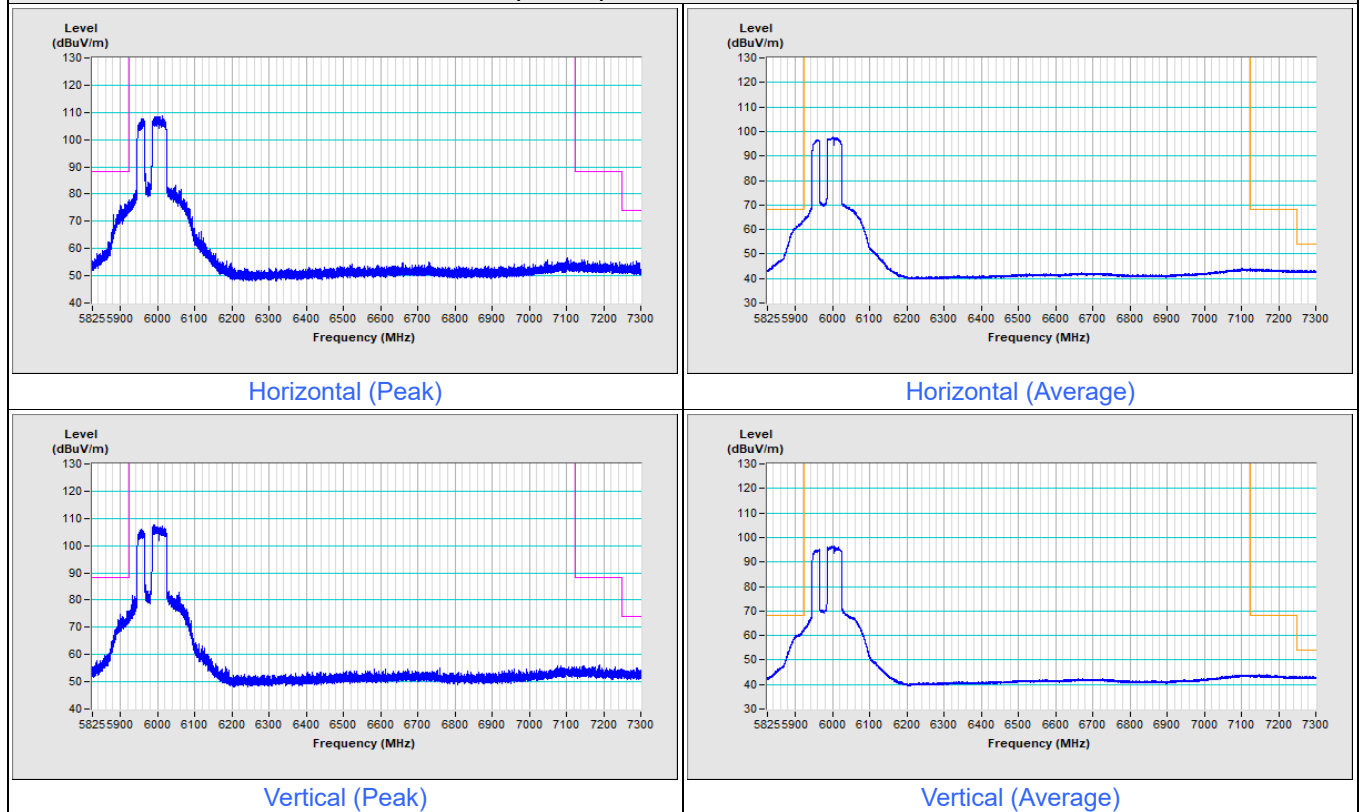


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 15

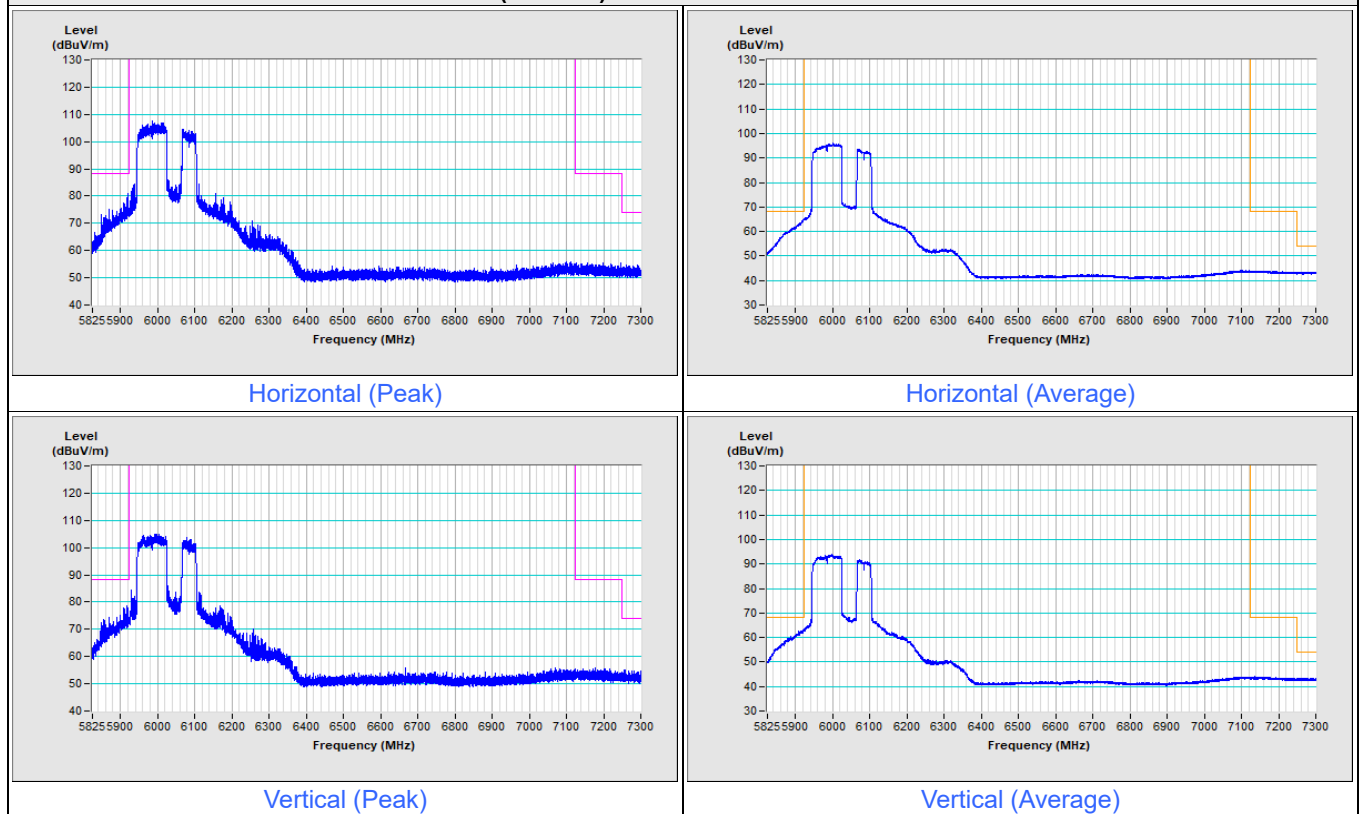

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 15

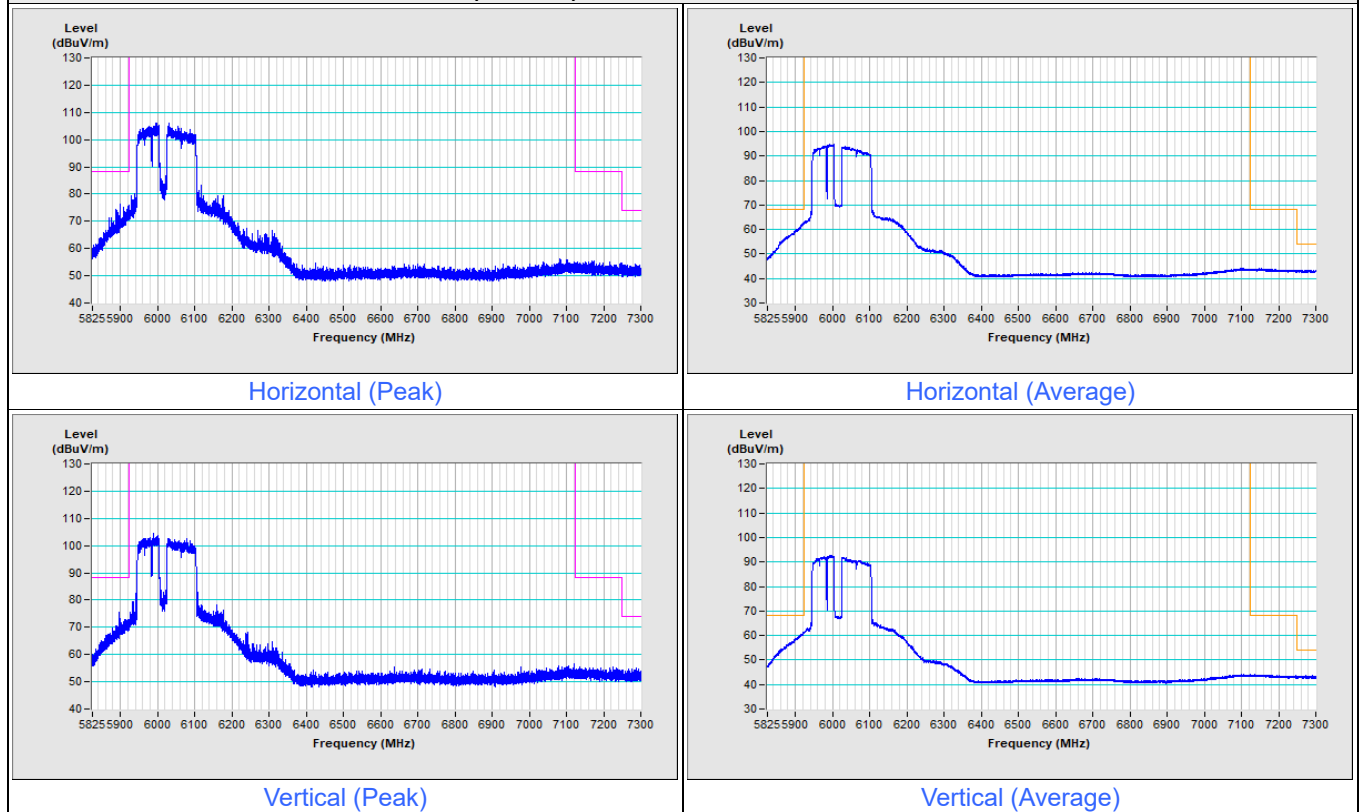

Mode C

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.8 PK	88.2	-28.4	2.51 H	139	55.5	4.3
2	#5925.00	45.8 AV	68.2	-22.4	2.51 H	139	41.5	4.3
3	*5955.00	104.3 PK			2.51 H	139	99.8	4.5
4	*5955.00	95.1 AV			2.51 H	139	90.6	4.5
5	11910.00	49.7 PK	74.0	-24.3	3.76 H	86	37.5	12.2
6	11910.00	38.2 AV	54.0	-15.8	3.76 H	86	26.0	12.2
7	17865.00	56.1 PK	74.0	-17.9	2.56 H	99	34.2	21.9
8	17865.00	43.8 AV	54.0	-10.2	2.56 H	99	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.3 PK	88.2	-16.9	1.71 V	268	67.0	4.3
2	#5925.00	58.6 AV	68.2	-9.6	1.71 V	268	54.3	4.3
3	*5955.00	115.3 PK			1.71 V	268	110.8	4.5
4	*5955.00	105.7 AV			1.71 V	268	101.2	4.5
5	11910.00	50.8 PK	74.0	-23.2	3.63 V	216	38.6	12.2
6	11910.00	38.6 AV	54.0	-15.4	3.63 V	216	26.4	12.2
7	17865.00	55.2 PK	74.0	-18.8	2.65 V	98	33.3	21.9
8	17865.00	43.3 AV	54.0	-10.7	2.65 V	98	21.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	104.9 PK			2.46 H	146	100.1	4.8
2	*6195.00	95.8 AV			2.46 H	146	91.0	4.8
3	12390.00	50.6 PK	74.0	-23.4	3.73 H	75	38.3	12.3
4	12390.00	38.3 AV	54.0	-15.7	3.73 H	75	26.0	12.3
5	18585.00	55.1 PK	74.0	-18.9	2.54 H	102	60.1	-5.0
6	18585.00	43.3 AV	54.0	-10.7	2.54 H	102	48.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.3 PK			1.36 V	268	109.5	4.8
2	*6195.00	105.4 AV			1.36 V	268	100.6	4.8
3	12390.00	51.7 PK	74.0	-22.3	3.65 V	208	39.4	12.3
4	12390.00	38.4 AV	54.0	-15.6	3.65 V	208	26.1	12.3
5	18585.00	54.5 PK	74.0	-19.5	2.64 V	98	59.5	-5.0
6	18585.00	43.4 AV	54.0	-10.6	2.64 V	98	48.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.7 PK			2.52 H	141	102.3	6.4
2	*6415.00	97.6 AV			2.52 H	141	91.2	6.4
3	#12830.00	50.6 PK	88.2	-37.6	3.69 H	73	37.6	13.0
4	#12830.00	38.2 AV	68.2	-30.0	3.69 H	73	25.2	13.0
5	19245.00	55.4 PK	74.0	-18.6	2.51 H	92	59.2	-3.8
6	19245.00	44.0 AV	54.0	-10.0	2.51 H	92	47.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.1 PK			1.86 V	89	111.7	6.4
2	*6415.00	108.4 AV			1.86 V	89	102.0	6.4
3	#12830.00	50.8 PK	88.2	-37.4	3.65 V	203	37.8	13.0
4	#12830.00	38.8 AV	68.2	-29.4	3.65 V	203	25.8	13.0
5	19245.00	54.8 PK	74.0	-19.2	2.61 V	89	58.6	-3.8
6	19245.00	43.3 AV	54.0	-10.7	2.61 V	89	47.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.2 PK			2.54 H	152	100.3	6.9
2	*6535.00	97.2 AV			2.54 H	152	90.3	6.9
3	#13070.00	50.4 PK	88.2	-37.8	3.62 H	84	37.2	13.2
4	#13070.00	37.4 AV	68.2	-30.8	3.62 H	84	24.2	13.2
5	19605.00	55.7 PK	74.0	-18.3	2.45 H	97	59.7	-4.0
6	19605.00	42.9 AV	54.0	-11.1	2.45 H	97	46.9	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			1.88 V	91	111.2	6.9
2	*6535.00	108.3 AV			1.88 V	91	101.4	6.9
3	#13070.00	51.4 PK	88.2	-36.8	3.63 V	211	38.2	13.2
4	#13070.00	38.5 AV	68.2	-29.7	3.63 V	211	25.3	13.2
5	19605.00	55.1 PK	74.0	-18.9	2.63 V	92	59.1	-4.0
6	19605.00	42.9 AV	54.0	-11.1	2.63 V	92	46.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.9 PK			2.41 H	141	102.7	7.2
2	*6695.00	99.7 AV			2.41 H	141	92.5	7.2
3	13390.00	50.2 PK	74.0	-23.8	3.70 H	88	36.2	14.0
4	13390.00	38.5 AV	54.0	-15.5	3.70 H	88	24.5	14.0
5	20085.00	55.6 PK	74.0	-18.4	2.45 H	106	59.1	-3.5
6	20085.00	43.3 AV	54.0	-10.7	2.45 H	106	46.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.7 PK			1.87 V	267	112.5	7.2
2	*6695.00	109.3 AV			1.87 V	267	102.1	7.2
3	13390.00	51.4 PK	74.0	-22.6	3.65 V	219	37.4	14.0
4	13390.00	39.3 AV	54.0	-14.7	3.65 V	219	25.3	14.0
5	20085.00	55.1 PK	74.0	-18.9	2.58 V	95	58.6	-3.5
6	20085.00	43.5 AV	54.0	-10.5	2.58 V	95	47.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.0 PK			2.59 H	154	100.8	7.2
2	*6855.00	98.2 AV			2.59 H	154	91.0	7.2
3	#13710.00	50.8 PK	88.2	-37.4	3.68 H	90	35.6	15.2
4	#13710.00	38.2 AV	68.2	-30.0	3.68 H	90	23.0	15.2
5	20565.00	55.6 PK	74.0	-18.4	2.46 H	87	58.9	-3.3
6	20565.00	43.6 AV	54.0	-10.4	2.46 H	87	46.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.3 PK			1.84 V	271	111.1	7.2
2	*6855.00	108.6 AV			1.84 V	271	101.4	7.2
3	#13710.00	51.0 PK	88.2	-37.2	3.61 V	231	35.8	15.2
4	#13710.00	39.4 AV	68.2	-28.8	3.61 V	231	24.2	15.2
5	20565.00	54.9 PK	74.0	-19.1	2.53 V	82	58.2	-3.3
6	20565.00	42.9 AV	54.0	-11.1	2.53 V	82	46.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1Tx NSS1

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.0 PK	88.2	-24.2	1.00 H	0	59.7	4.3
2	#5925.00	50.0 AV	68.2	-18.2	1.00 H	0	45.7	4.3
3	*5955.00	106.4 PK			2.51 H	139	101.9	4.5
4	*5955.00	94.9 AV			2.51 H	139	90.4	4.5
5	11910.00	50.7 PK	74.0	-23.3	3.70 H	67	38.5	12.2
6	11910.00	39.2 AV	54.0	-14.8	3.70 H	67	27.0	12.2
7	17865.00	56.0 PK	74.0	-18.0	2.59 H	111	34.1	21.9
8	17865.00	42.5 AV	54.0	-11.5	2.59 H	111	20.6	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.1 PK	88.2	-6.1	1.77 V	268	77.8	4.3
2	#5925.00	61.1 AV	68.2	-7.1	1.77 V	268	56.8	4.3
3	*5955.00	116.9 PK			1.77 V	268	112.4	4.5
4	*5955.00	105.3 AV			1.77 V	268	100.8	4.5
5	11910.00	51.3 PK	74.0	-22.7	3.60 V	201	39.1	12.2
6	11910.00	39.5 AV	54.0	-14.5	3.60 V	201	27.3	12.2
7	17865.00	55.1 PK	74.0	-18.9	2.59 V	79	33.2	21.9
8	17865.00	43.0 AV	54.0	-11.0	2.59 V	79	21.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	106.3 PK			2.55 H	143	101.5	4.8
2	*6195.00	94.8 AV			2.55 H	143	90.0	4.8
3	12390.00	50.8 PK	74.0	-23.2	3.67 H	76	38.5	12.3
4	12390.00	37.3 AV	54.0	-16.7	3.67 H	76	25.0	12.3
5	18585.00	55.2 PK	74.0	-18.8	2.48 H	102	60.2	-5.0
6	18585.00	44.2 AV	54.0	-9.8	2.48 H	102	49.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.4 PK			1.85 V	95	111.6	4.8
2	*6195.00	105.7 AV			1.85 V	95	100.9	4.8
3	12390.00	51.4 PK	74.0	-22.6	3.60 V	218	39.1	12.3
4	12390.00	38.3 AV	54.0	-15.7	3.60 V	218	26.0	12.3
5	18585.00	55.5 PK	74.0	-18.5	2.55 V	82	60.5	-5.0
6	18585.00	43.4 AV	54.0	-10.6	2.55 V	82	48.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.2 PK			2.54 H	146	101.8	6.4
2	*6415.00	97.3 AV			2.54 H	146	90.9	6.4
3	#12830.00	50.5 PK	88.2	-37.7	3.71 H	63	37.5	13.0
4	#12830.00	38.0 AV	68.2	-30.2	3.71 H	63	25.0	13.0
5	19245.00	54.8 PK	74.0	-19.2	2.55 H	78	58.6	-3.8
6	19245.00	43.4 AV	54.0	-10.6	2.55 H	78	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.9 PK			1.84 V	91	113.5	6.4
2	*6415.00	107.1 AV			1.84 V	91	100.7	6.4
3	#12830.00	51.3 PK	88.2	-36.9	3.64 V	214	38.3	13.0
4	#12830.00	38.4 AV	68.2	-29.8	3.64 V	214	25.4	13.0
5	19245.00	54.7 PK	74.0	-19.3	2.66 V	86	58.5	-3.8
6	19245.00	43.0 AV	54.0	-11.0	2.66 V	86	46.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.6 PK			2.46 H	134	99.7	6.9
2	*6535.00	97.1 AV			2.46 H	134	90.2	6.9
3	#13070.00	48.5 PK	88.2	-39.7	3.60 H	77	35.3	13.2
4	#13070.00	38.4 AV	68.2	-29.8	3.60 H	77	25.2	13.2
5	19605.00	56.0 PK	74.0	-18.0	2.43 H	94	60.0	-4.0
6	19605.00	43.2 AV	54.0	-10.8	2.43 H	94	47.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			1.74 V	95	111.2	6.9
2	*6535.00	107.5 AV			1.74 V	95	100.6	6.9
3	#13070.00	50.0 PK	88.2	-38.2	3.70 V	226	36.8	13.2
4	#13070.00	38.7 AV	68.2	-29.5	3.70 V	226	25.5	13.2
5	19605.00	55.0 PK	74.0	-19.0	2.52 V	101	59.0	-4.0
6	19605.00	43.5 AV	54.0	-10.5	2.52 V	101	47.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.4 PK			2.55 H	141	101.2	7.2
2	*6695.00	97.6 AV			2.55 H	141	90.4	7.2
3	13390.00	50.3 PK	74.0	-23.7	3.73 H	97	36.3	14.0
4	13390.00	37.7 AV	54.0	-16.3	3.73 H	97	23.7	14.0
5	20085.00	54.9 PK	74.0	-19.1	2.50 H	113	58.4	-3.5
6	20085.00	44.3 AV	54.0	-9.7	2.50 H	113	47.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.7 PK			1.83 V	96	112.5	7.2
2	*6695.00	108.0 AV			1.83 V	96	100.8	7.2
3	13390.00	50.4 PK	74.0	-23.6	3.67 V	246	36.4	14.0
4	13390.00	39.1 AV	54.0	-14.9	3.67 V	246	25.1	14.0
5	20085.00	55.2 PK	74.0	-18.8	2.56 V	94	58.7	-3.5
6	20085.00	43.4 AV	54.0	-10.6	2.56 V	94	46.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.2 PK			2.58 H	148	101.0	7.2
2	*6855.00	96.6 AV			2.58 H	148	89.4	7.2
3	#13710.00	50.1 PK	88.2	-38.1	3.68 H	102	34.9	15.2
4	#13710.00	39.5 AV	68.2	-28.7	3.68 H	102	24.3	15.2
5	20565.00	55.6 PK	74.0	-18.4	2.45 H	101	58.9	-3.3
6	20565.00	43.9 AV	54.0	-10.1	2.45 H	101	47.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.1 PK			1.79 V	272	111.9	7.2
2	*6855.00	107.9 AV			1.79 V	272	100.7	7.2
3	#13710.00	50.7 PK	88.2	-37.5	3.70 V	228	35.5	15.2
4	#13710.00	39.6 AV	68.2	-28.6	3.70 V	228	24.4	15.2
5	20565.00	55.3 PK	74.0	-18.7	2.56 V	99	58.6	-3.3
6	20565.00	43.4 AV	54.0	-10.6	2.56 V	99	46.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.0 PK	88.2	-15.2	1.00 H	0	68.7	4.3
2	#5925.00	59.1 AV	68.2	-9.1	1.00 H	0	54.8	4.3
3	*5965.00	102.2 PK			2.48 H	139	97.8	4.4
4	*5965.00	91.0 AV			2.48 H	139	86.6	4.4
5	11930.00	48.3 PK	74.0	-25.7	3.66 H	72	36.2	12.1
6	11930.00	36.2 AV	54.0	-17.8	3.66 H	72	24.1	12.1
7	17895.00	52.8 PK	74.0	-21.2	2.57 H	122	30.5	22.3
8	17895.00	41.5 AV	54.0	-12.5	2.57 H	122	19.2	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.3 PK	88.2	-9.9	1.80 V	266	74.0	4.3
2	#5925.00	65.4 AV	68.2	-2.8	1.80 V	266	61.1	4.3
3	*5965.00	111.1 PK			1.80 V	266	106.7	4.4
4	*5965.00	99.9 AV			1.80 V	266	95.5	4.4
5	11930.00	48.9 PK	74.0	-25.1	3.56 V	210	36.8	12.1
6	11930.00	37.2 AV	54.0	-16.8	3.56 V	210	25.1	12.1
7	17895.00	52.2 PK	74.0	-21.8	2.57 V	70	29.9	22.3
8	17895.00	41.0 AV	54.0	-13.0	2.57 V	70	18.7	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	102.6 PK			2.48 H	152	97.7	4.9
2	*6205.00	90.8 AV			2.48 H	152	85.9	4.9
3	12410.00	49.0 PK	74.0	-25.0	3.61 H	66	36.7	12.3
4	12410.00	37.0 AV	54.0	-17.0	3.61 H	66	24.7	12.3
5	18615.00	53.6 PK	74.0	-20.4	2.53 H	99	58.5	-4.9
6	18615.00	42.1 AV	54.0	-11.9	2.53 H	99	47.0	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	113.3 PK			1.86 V	93	108.4	4.9
2	*6205.00	101.5 AV			1.86 V	93	96.6	4.9
3	12410.00	50.3 PK	74.0	-23.7	3.60 V	233	38.0	12.3
4	12410.00	38.4 AV	54.0	-15.6	3.60 V	233	26.1	12.3
5	18615.00	53.2 PK	74.0	-20.8	2.51 V	80	58.1	-4.9
6	18615.00	41.9 AV	54.0	-12.1	2.51 V	80	46.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	104.6 PK			2.55 H	127	98.2	6.4
2	*6405.00	93.3 AV			2.55 H	127	86.9	6.4
3	#12810.00	47.7 PK	88.2	-40.5	3.76 H	61	34.9	12.8
4	#12810.00	38.5 AV	68.2	-29.7	3.76 H	61	25.7	12.8
5	19215.00	55.9 PK	74.0	-18.1	2.53 H	67	59.6	-3.7
6	19215.00	44.1 AV	54.0	-9.9	2.53 H	67	47.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	115.8 PK			1.86 V	91	109.4	6.4
2	*6405.00	103.7 AV			1.86 V	91	97.3	6.4
3	#12810.00	49.1 PK	88.2	-39.1	3.70 V	228	36.3	12.8
4	#12810.00	38.7 AV	68.2	-29.5	3.70 V	228	25.9	12.8
5	19215.00	55.2 PK	74.0	-18.8	2.56 V	99	58.9	-3.7
6	19215.00	43.2 AV	54.0	-10.8	2.56 V	99	46.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	106.2 PK			2.60 H	154	99.3	6.9
2	*6565.00	94.1 AV			2.60 H	154	87.2	6.9
3	#13130.00	50.0 PK	88.2	-38.2	3.76 H	59	36.8	13.2
4	#13130.00	37.4 AV	68.2	-30.8	3.76 H	59	24.2	13.2
5	19695.00	54.7 PK	74.0	-19.3	2.57 H	90	58.6	-3.9
6	19695.00	43.0 AV	54.0	-11.0	2.57 H	90	46.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	115.8 PK			1.92 V	88	108.9	6.9
2	*6565.00	103.6 AV			1.92 V	88	96.7	6.9
3	#13130.00	50.9 PK	88.2	-37.3	3.64 V	198	37.7	13.2
4	#13130.00	38.4 AV	68.2	-29.8	3.64 V	198	25.2	13.2
5	19695.00	54.8 PK	74.0	-19.2	2.71 V	71	58.7	-3.9
6	19695.00	42.9 AV	54.0	-11.1	2.71 V	71	46.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	104.9 PK			2.57 H	133	97.7	7.2
2	*6685.00	93.6 AV			2.57 H	133	86.4	7.2
3	13370.00	50.5 PK	74.0	-23.5	3.74 H	65	36.5	14.0
4	13370.00	38.4 AV	54.0	-15.6	3.74 H	65	24.4	14.0
5	20055.00	55.1 PK	74.0	-18.9	2.60 H	117	58.6	-3.5
6	20055.00	43.1 AV	54.0	-10.9	2.60 H	117	46.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	116.3 PK			1.89 V	91	109.1	7.2
2	*6685.00	105.4 AV			1.89 V	91	98.2	7.2
3	13370.00	50.9 PK	74.0	-23.1	3.62 V	210	36.9	14.0
4	13370.00	38.8 AV	54.0	-15.2	3.62 V	210	24.8	14.0
5	20055.00	54.5 PK	74.0	-19.5	2.63 V	81	58.0	-3.5
6	20055.00	43.2 AV	54.0	-10.8	2.63 V	81	46.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	105.9 PK			2.53 H	148	98.8	7.1
2	*6845.00	94.8 AV			2.53 H	148	87.7	7.1
3	#13690.00	48.9 PK	88.2	-39.3	3.70 H	75	33.8	15.1
4	#13690.00	37.6 AV	68.2	-30.6	3.70 H	75	22.5	15.1
5	20535.00	55.9 PK	74.0	-18.1	2.57 H	71	59.1	-3.2
6	20535.00	44.2 AV	54.0	-9.8	2.57 H	71	47.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.1 PK			1.81 V	83	108.0	7.1
2	*6845.00	103.7 AV			1.81 V	83	96.6	7.1
3	#13690.00	49.8 PK	88.2	-38.4	3.59 V	212	34.7	15.1
4	#13690.00	38.4 AV	68.2	-29.8	3.59 V	212	23.3	15.1
5	20535.00	55.3 PK	74.0	-18.7	2.56 V	82	58.5	-3.2
6	20535.00	43.3 AV	54.0	-10.7	2.56 V	82	46.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.2 PK	88.2	-19.0	2.59 H	139	64.9	4.3
2	#5925.00	56.2 AV	68.2	-12.0	2.59 H	139	51.9	4.3
3	*5985.00	97.6 PK			2.59 H	139	93.2	4.4
4	*5985.00	86.9 AV			2.59 H	139	82.5	4.4
5	11970.00	45.0 PK	74.0	-29.0	3.68 H	83	32.8	12.2
6	11970.00	34.9 AV	54.0	-19.1	3.68 H	83	22.7	12.2
7	17955.00	56.5 PK	74.0	-17.5	2.46 H	87	33.1	23.4
8	17955.00	43.6 AV	54.0	-10.4	2.46 H	87	20.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.0 PK	88.2	-9.2	1.75 V	85	74.7	4.3
2	#5925.00	65.8 AV	68.2	-2.4	1.75 V	85	61.5	4.3
3	*5985.00	107.8 PK			1.75 V	85	103.4	4.4
4	*5985.00	96.4 AV			1.75 V	85	92.0	4.4
5	11970.00	46.2 PK	74.0	-27.8	3.60 V	224	34.0	12.2
6	11970.00	35.2 AV	54.0	-18.8	3.60 V	224	23.0	12.2
7	17955.00	55.6 PK	74.0	-18.4	2.63 V	79	32.2	23.4
8	17955.00	43.1 AV	54.0	-10.9	2.63 V	79	19.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	101.7 PK			2.54 H	143	96.7	5.0
2	*6225.00	88.7 AV			2.54 H	143	83.7	5.0
3	12450.00	47.8 PK	74.0	-26.2	3.73 H	74	35.5	12.3
4	12450.00	36.1 AV	54.0	-17.9	3.73 H	74	23.8	12.3
5	18675.00	55.6 PK	74.0	-18.4	2.53 H	80	60.5	-4.9
6	18675.00	43.9 AV	54.0	-10.1	2.53 H	80	48.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.2 PK			1.74 V	83	107.2	5.0
2	*6225.00	100.0 AV			1.74 V	83	95.0	5.0
3	12450.00	48.8 PK	74.0	-25.2	3.59 V	204	36.5	12.3
4	12450.00	37.5 AV	54.0	-16.5	3.59 V	204	25.2	12.3
5	18675.00	55.2 PK	74.0	-18.8	2.61 V	101	60.1	-4.9
6	18675.00	43.2 AV	54.0	-10.8	2.61 V	101	48.1	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.3 PK			2.59 H	139	98.1	6.2
2	*6385.00	90.5 AV			2.59 H	139	84.3	6.2
3	#12770.00	48.9 PK	88.2	-39.3	3.69 H	57	36.1	12.8
4	#12770.00	36.2 AV	68.2	-32.0	3.69 H	57	23.4	12.8
5	19155.00	54.9 PK	74.0	-19.1	2.51 H	66	58.7	-3.8
6	19155.00	43.9 AV	54.0	-10.1	2.51 H	66	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.6 PK			1.84 V	83	108.4	6.2
2	*6385.00	101.8 AV			1.84 V	83	95.6	6.2
3	#12770.00	49.3 PK	88.2	-38.9	3.74 V	235	36.5	12.8
4	#12770.00	37.0 AV	68.2	-31.2	3.74 V	235	24.2	12.8
5	19155.00	55.0 PK	74.0	-19.0	2.52 V	113	58.8	-3.8
6	19155.00	43.8 AV	54.0	-10.2	2.52 V	113	47.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	104.2 PK			2.57 H	163	97.3	6.9
2	*6625.00	91.3 AV			2.57 H	163	84.4	6.9
3	13250.00	47.8 PK	74.0	-26.2	3.71 H	49	34.2	13.6
4	13250.00	37.5 AV	54.0	-16.5	3.71 H	49	23.9	13.6
5	19875.00	55.7 PK	74.0	-18.3	2.58 H	71	59.2	-3.5
6	19875.00	44.4 AV	54.0	-9.6	2.58 H	71	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	115.1 PK			1.78 V	84	108.2	6.9
2	*6625.00	102.6 AV			1.78 V	84	95.7	6.9
3	13250.00	48.9 PK	74.0	-25.1	3.68 V	235	35.3	13.6
4	13250.00	37.8 AV	54.0	-16.2	3.68 V	235	24.2	13.6
5	19875.00	55.4 PK	74.0	-18.6	2.55 V	102	58.9	-3.5
6	19875.00	43.5 AV	54.0	-10.5	2.55 V	102	47.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.2 PK			2.48 H	139	98.0	7.2
2	*6705.00	91.2 AV			2.48 H	139	84.0	7.2
3	#13410.00	49.5 PK	88.2	-38.7	3.76 H	95	35.3	14.2
4	#13410.00	36.7 AV	68.2	-31.5	3.76 H	95	22.5	14.2
5	20115.00	55.3 PK	74.0	-18.7	2.44 H	76	58.8	-3.5
6	20115.00	43.6 AV	54.0	-10.4	2.44 H	76	47.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	116.2 PK			1.81 V	84	109.0	7.2
2	*6705.00	102.8 AV			1.81 V	84	95.6	7.2
3	#13410.00	49.6 PK	88.2	-38.6	3.68 V	215	35.4	14.2
4	#13410.00	36.9 AV	68.2	-31.3	3.68 V	215	22.7	14.2
5	20115.00	55.4 PK	74.0	-18.6	2.51 V	87	58.9	-3.5
6	20115.00	43.1 AV	54.0	-10.9	2.51 V	87	46.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	105.4 PK			2.51 H	164	98.4	7.0
2	*6785.00	91.1 AV			2.51 H	164	84.1	7.0
3	#13570.00	48.4 PK	88.2	-39.8	3.72 H	66	33.8	14.6
4	#13570.00	35.5 AV	68.2	-32.7	3.72 H	66	20.9	14.6
5	20355.00	55.1 PK	74.0	-18.9	2.51 H	77	58.2	-3.1
6	20355.00	43.3 AV	54.0	-10.7	2.51 H	77	46.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	115.0 PK			1.71 V	83	108.0	7.0
2	*6785.00	101.9 AV			1.71 V	83	94.9	7.0
3	#13570.00	49.1 PK	88.2	-39.1	3.71 V	234	34.5	14.6
4	#13570.00	36.8 AV	68.2	-31.4	3.71 V	234	22.2	14.6
5	20355.00	54.7 PK	74.0	-19.3	2.55 V	85	57.8	-3.1
6	20355.00	43.3 AV	54.0	-10.7	2.55 V	85	46.4	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.0 PK	88.2	-27.2	2.78 H	141	56.7	4.3
2	#5925.00	48.1 AV	68.2	-20.1	2.78 H	141	43.8	4.3
3	*6025.00	94.0 PK			2.78 H	141	89.8	4.2
4	*6025.00	81.4 AV			2.78 H	141	77.2	4.2
5	12050.00	46.7 PK	74.0	-27.3	3.74 H	87	34.3	12.4
6	12050.00	35.7 AV	54.0	-18.3	3.74 H	87	23.3	12.4
7	18075.00	55.4 PK	74.0	-18.6	2.47 H	79	60.1	-4.7
8	18075.00	43.2 AV	54.0	-10.8	2.47 H	79	47.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.3 PK	88.2	-9.9	1.77 V	95	74.0	4.3
2	#5925.00	66.2 AV	68.2	-2.0	1.77 V	95	61.9	4.3
3	*6025.00	106.2 PK			1.77 V	95	102.0	4.2
4	*6025.00	94.1 AV			1.77 V	95	89.9	4.2
5	12050.00	47.1 PK	74.0	-26.9	3.53 V	224	34.7	12.4
6	12050.00	36.5 AV	54.0	-17.5	3.53 V	224	24.1	12.4
7	18075.00	55.2 PK	74.0	-18.8	2.61 V	58	59.9	-4.7
8	18075.00	43.3 AV	54.0	-10.7	2.61 V	58	48.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	97.5 PK			2.54 H	111	92.7	4.8
2	*6185.00	86.4 AV			2.54 H	111	81.6	4.8
3	12370.00	47.5 PK	74.0	-26.5	3.61 H	67	35.2	12.3
4	12370.00	36.5 AV	54.0	-17.5	3.61 H	67	24.2	12.3
5	18555.00	55.4 PK	74.0	-18.6	2.48 H	116	60.3	-4.9
6	18555.00	44.4 AV	54.0	-9.6	2.48 H	116	49.3	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.2 PK			1.87 V	83	102.4	4.8
2	*6185.00	96.2 AV			1.87 V	83	91.4	4.8
3	12370.00	47.6 PK	74.0	-26.4	3.69 V	219	35.3	12.3
4	12370.00	36.9 AV	54.0	-17.1	3.69 V	219	24.6	12.3
5	18555.00	55.2 PK	74.0	-18.8	2.61 V	95	60.1	-4.9
6	18555.00	43.4 AV	54.0	-10.6	2.61 V	95	48.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	98.6 PK			2.45 H	155	92.5	6.1
2	*6345.00	96.9 AV			2.45 H	155	90.8	6.1
3	12690.00	46.6 PK	74.0	-27.4	3.72 H	59	33.7	12.9
4	12690.00	36.1 AV	54.0	-17.9	3.72 H	59	23.2	12.9
5	19035.00	55.4 PK	74.0	-18.6	2.50 H	76	59.3	-3.9
6	19035.00	43.7 AV	54.0	-10.3	2.50 H	76	47.6	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.8 PK			1.83 V	83	102.7	6.1
2	*6345.00	97.3 AV			1.83 V	83	91.2	6.1
3	12690.00	47.9 PK	74.0	-26.1	3.68 V	236	35.0	12.9
4	12690.00	36.8 AV	54.0	-17.2	3.68 V	236	23.9	12.9
5	19035.00	54.5 PK	74.0	-19.5	2.55 V	112	58.4	-3.9
6	19035.00	43.3 AV	54.0	-10.7	2.55 V	112	47.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	100.1 PK			2.56 H	132	92.9	7.2
2	*6665.00	88.9 AV			2.56 H	132	81.7	7.2
3	13330.00	47.7 PK	74.0	-26.3	3.73 H	79	33.9	13.8
4	13330.00	36.2 AV	54.0	-17.8	3.73 H	79	22.4	13.8
5	19995.00	55.5 PK	74.0	-18.5	2.57 H	76	59.1	-3.6
6	19995.00	43.5 AV	54.0	-10.5	2.57 H	76	47.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			1.73 V	82	103.3	7.2
2	*6665.00	98.7 AV			1.73 V	82	91.5	7.2
3	13330.00	48.3 PK	74.0	-25.7	3.70 V	232	34.5	13.8
4	13330.00	37.3 AV	54.0	-16.7	3.70 V	232	23.5	13.8
5	19995.00	55.2 PK	74.0	-18.8	2.57 V	104	58.8	-3.6
6	19995.00	43.3 AV	54.0	-10.7	2.57 V	104	46.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	2.43 H	129	59.6	4.3
2	#5925.00	44.5 AV	68.2	-23.7	2.43 H	129	40.2	4.3
3	*5955.00	112.6 PK			2.43 H	129	108.1	4.5
4	*5955.00	103.7 AV			2.43 H	129	99.2	4.5
5	11910.00	54.5 PK	74.0	-19.5	3.66 H	60	42.3	12.2
6	11910.00	44.5 AV	54.0	-9.5	3.66 H	60	32.3	12.2
7	17865.00	56.3 PK	74.0	-17.7	2.58 H	86	34.4	21.9
8	17865.00	45.2 AV	54.0	-8.8	2.58 H	86	23.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.8 PK	88.2	-17.4	1.82 V	98	66.5	4.3
2	#5925.00	52.2 AV	68.2	-16.0	1.82 V	98	47.9	4.3
3	*5955.00	121.4 PK			1.82 V	98	116.9	4.5
4	*5955.00	112.9 AV			1.82 V	98	108.4	4.5
5	11910.00	55.2 PK	74.0	-18.8	3.68 V	219	43.0	12.2
6	11910.00	46.4 AV	54.0	-7.6	3.68 V	219	34.2	12.2
7	17865.00	56.9 PK	74.0	-17.1	2.47 V	110	35.0	21.9
8	17865.00	46.0 AV	54.0	-8.0	2.47 V	110	24.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	112.0 PK			2.61 H	140	107.2	4.8
2	*6195.00	103.5 AV			2.61 H	140	98.7	4.8
3	12390.00	52.8 PK	74.0	-21.2	3.67 H	70	40.5	12.3
4	12390.00	43.7 AV	54.0	-10.3	3.67 H	70	31.4	12.3
5	18585.00	55.5 PK	74.0	-18.5	2.52 H	117	60.5	-5.0
6	18585.00	45.8 AV	54.0	-8.2	2.52 H	117	50.8	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.9 PK			1.76 V	84	117.1	4.8
2	*6195.00	113.4 AV			1.76 V	84	108.6	4.8
3	12390.00	54.6 PK	74.0	-19.4	3.71 V	205	42.3	12.3
4	12390.00	45.9 AV	54.0	-8.1	3.71 V	205	33.6	12.3
5	18585.00	57.0 PK	74.0	-17.0	2.53 V	87	62.0	-5.0
6	18585.00	46.1 AV	54.0	-7.9	2.53 V	87	51.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	113.6 PK			2.54 H	133	107.2	6.4
2	*6415.00	104.3 AV			2.54 H	133	97.9	6.4
3	#12830.00	53.0 PK	88.2	-35.2	3.68 H	66	40.0	13.0
4	#12830.00	44.4 AV	68.2	-23.8	3.68 H	66	31.4	13.0
5	19245.00	55.8 PK	74.0	-18.2	2.50 H	51	59.6	-3.8
6	19245.00	45.6 AV	54.0	-8.4	2.50 H	51	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.2 PK			1.89 V	112	116.8	6.4
2	*6415.00	114.7 AV			1.89 V	112	108.3	6.4
3	#12830.00	54.5 PK	88.2	-33.7	3.65 V	227	41.5	13.0
4	#12830.00	46.1 AV	68.2	-22.1	3.65 V	227	33.1	13.0
5	19245.00	56.8 PK	74.0	-17.2	2.53 V	68	60.6	-3.8
6	19245.00	45.7 AV	54.0	-8.3	2.53 V	68	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.3 PK			2.57 H	142	106.4	6.9
2	*6535.00	103.7 AV			2.57 H	142	96.8	6.9
3	#13070.00	51.8 PK	88.2	-36.4	3.69 H	65	38.6	13.2
4	#13070.00	43.6 AV	68.2	-24.6	3.69 H	65	30.4	13.2
5	19605.00	56.3 PK	74.0	-17.7	2.54 H	61	60.3	-4.0
6	19605.00	44.8 AV	54.0	-9.2	2.54 H	61	48.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.1 PK			1.78 V	86	116.2	6.9
2	*6535.00	115.1 AV			1.78 V	86	108.2	6.9
3	#13070.00	54.3 PK	88.2	-33.9	3.63 V	212	41.1	13.2
4	#13070.00	45.6 AV	68.2	-22.6	3.63 V	212	32.4	13.2
5	19605.00	57.0 PK	74.0	-17.0	2.57 V	93	61.0	-4.0
6	19605.00	46.5 AV	54.0	-7.5	2.57 V	93	50.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.5 PK			2.48 H	141	106.3	7.2
2	*6695.00	105.2 AV			2.48 H	141	98.0	7.2
3	13390.00	51.8 PK	74.0	-22.2	3.71 H	67	37.8	14.0
4	13390.00	43.2 AV	54.0	-10.8	3.71 H	67	29.2	14.0
5	20085.00	54.6 PK	74.0	-19.4	2.63 H	130	58.1	-3.5
6	20085.00	43.9 AV	54.0	-10.1	2.63 H	130	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.5 PK			1.69 V	98	116.3	7.2
2	*6695.00	115.4 AV			1.69 V	98	108.2	7.2
3	13390.00	53.3 PK	74.0	-20.7	3.61 V	209	39.3	14.0
4	13390.00	45.6 AV	54.0	-8.4	3.61 V	209	31.6	14.0
5	20085.00	55.4 PK	74.0	-18.6	2.60 V	73	58.9	-3.5
6	20085.00	44.9 AV	54.0	-9.1	2.60 V	73	48.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.1 PK			2.50 H	131	104.9	7.2
2	*6855.00	104.1 AV			2.50 H	131	96.9	7.2
3	#13710.00	52.4 PK	88.2	-35.8	3.73 H	58	37.2	15.2
4	#13710.00	42.5 AV	68.2	-25.7	3.73 H	58	27.3	15.2
5	20565.00	54.3 PK	74.0	-19.7	2.57 H	103	57.6	-3.3
6	20565.00	42.8 AV	54.0	-11.2	2.57 H	103	46.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.9 PK			1.95 V	102	114.7	7.2
2	*6855.00	115.8 AV			1.95 V	102	108.6	7.2
3	#13710.00	53.9 PK	88.2	-34.3	3.63 V	228	38.7	15.2
4	#13710.00	44.9 AV	68.2	-23.3	3.63 V	228	29.7	15.2
5	20565.00	54.9 PK	74.0	-19.1	2.54 V	70	58.2	-3.3
6	20565.00	44.3 AV	54.0	-9.7	2.54 V	70	47.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	60.8 PK	88.2	-27.4	2.49 H	145	56.5	4.3
2	#5925.00	46.8 AV	68.2	-21.4	2.49 H	145	42.5	4.3
3	*5955.00	111.9 PK			2.49 H	145	107.4	4.5
4	*5955.00	102.1 AV			2.49 H	145	97.6	4.5
5	11910.00	52.0 PK	74.0	-22.0	3.56 H	62	39.8	12.2
6	11910.00	42.8 AV	54.0	-11.2	3.56 H	62	30.6	12.2
7	17865.00	56.3 PK	74.0	-17.7	2.58 H	111	34.4	21.9
8	17865.00	44.7 AV	54.0	-9.3	2.58 H	111	22.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	1.81 V	75	69.6	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.81 V	75	53.6	4.3
3	*5955.00	120.9 PK			1.81 V	75	116.4	4.5
4	*5955.00	111.6 AV			1.81 V	75	107.1	4.5
5	11910.00	54.0 PK	74.0	-20.0	3.55 V	231	41.8	12.2
6	11910.00	44.7 AV	54.0	-9.3	3.55 V	231	32.5	12.2
7	17865.00	57.1 PK	74.0	-16.9	2.59 V	81	35.2	21.9
8	17865.00	45.9 AV	54.0	-8.1	2.59 V	81	24.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	109.6 PK			2.49 H	149	104.8	4.8
2	*6195.00	102.6 AV			2.49 H	149	97.8	4.8
3	12390.00	53.3 PK	74.0	-20.7	3.76 H	62	41.0	12.3
4	12390.00	43.1 AV	54.0	-10.9	3.76 H	62	30.8	12.3
5	18585.00	55.9 PK	74.0	-18.1	2.58 H	72	60.9	-5.0
6	18585.00	44.6 AV	54.0	-9.4	2.58 H	72	49.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.5 PK			1.79 V	106	116.7	4.8
2	*6195.00	112.1 AV			1.79 V	106	107.3	4.8
3	12390.00	54.8 PK	74.0	-19.2	3.62 V	245	42.5	12.3
4	12390.00	45.0 AV	54.0	-9.0	3.62 V	245	32.7	12.3
5	18585.00	57.3 PK	74.0	-16.7	2.57 V	69	62.3	-5.0
6	18585.00	45.6 AV	54.0	-8.4	2.57 V	69	50.6	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.7 PK			2.57 H	155	104.3	6.4
2	*6415.00	103.6 AV			2.57 H	155	97.2	6.4
3	#12830.00	52.7 PK	88.2	-35.5	3.72 H	48	39.7	13.0
4	#12830.00	43.5 AV	68.2	-24.7	3.72 H	48	30.5	13.0
5	19245.00	55.5 PK	74.0	-18.5	2.49 H	74	59.3	-3.8
6	19245.00	45.3 AV	54.0	-8.7	2.49 H	74	49.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.2 PK			1.86 V	85	116.8	6.4
2	*6415.00	113.9 AV			1.86 V	85	107.5	6.4
3	#12830.00	55.0 PK	88.2	-33.2	3.62 V	193	42.0	13.0
4	#12830.00	45.5 AV	68.2	-22.7	3.62 V	193	32.5	13.0
5	19245.00	56.8 PK	74.0	-17.2	2.60 V	63	60.6	-3.8
6	19245.00	45.7 AV	54.0	-8.3	2.60 V	63	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.7 PK			2.48 H	143	106.8	6.9
2	*6535.00	103.8 AV			2.48 H	143	96.9	6.9
3	#13070.00	52.9 PK	88.2	-35.3	3.68 H	88	39.7	13.2
4	#13070.00	42.2 AV	68.2	-26.0	3.68 H	88	29.0	13.2
5	19605.00	55.4 PK	74.0	-18.6	2.50 H	85	59.4	-4.0
6	19605.00	46.0 AV	54.0	-8.0	2.50 H	85	50.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.5 PK			1.72 V	100	116.6	6.9
2	*6535.00	114.5 AV			1.72 V	100	107.6	6.9
3	#13070.00	55.0 PK	88.2	-33.2	3.65 V	227	41.8	13.2
4	#13070.00	44.7 AV	68.2	-23.5	3.65 V	227	31.5	13.2
5	19605.00	56.6 PK	74.0	-17.4	2.66 V	93	60.6	-4.0
6	19605.00	46.4 AV	54.0	-7.6	2.66 V	93	50.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	114.2 PK			2.57 H	145	107.0	7.2
2	*6695.00	103.9 AV			2.57 H	145	96.7	7.2
3	13390.00	51.0 PK	74.0	-23.0	3.68 H	104	37.0	14.0
4	13390.00	42.0 AV	54.0	-12.0	3.68 H	104	28.0	14.0
5	20085.00	54.4 PK	74.0	-19.6	2.47 H	88	57.9	-3.5
6	20085.00	43.3 AV	54.0	-10.7	2.47 H	88	46.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.7 PK			1.81 V	92	116.5	7.2
2	*6695.00	114.9 AV			1.81 V	92	107.7	7.2
3	13390.00	53.3 PK	74.0	-20.7	3.76 V	222	39.3	14.0
4	13390.00	44.0 AV	54.0	-10.0	3.76 V	222	30.0	14.0
5	20085.00	55.7 PK	74.0	-18.3	2.48 V	105	59.2	-3.5
6	20085.00	44.9 AV	54.0	-9.1	2.48 V	105	48.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.5 PK			2.54 H	143	107.3	7.2
2	*6855.00	103.6 AV			2.54 H	143	96.4	7.2
3	#13710.00	51.6 PK	88.2	-36.6	3.67 H	83	36.4	15.2
4	#13710.00	41.6 AV	68.2	-26.6	3.67 H	83	26.4	15.2
5	20565.00	54.6 PK	74.0	-19.4	2.44 H	106	57.9	-3.3
6	20565.00	43.8 AV	54.0	-10.2	2.44 H	106	47.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	123.8 PK			1.29 V	122	116.6	7.2
2	*6855.00	114.2 AV			1.29 V	122	107.0	7.2
3	#13710.00	54.0 PK	88.2	-34.2	3.71 V	239	38.8	15.2
4	#13710.00	44.1 AV	68.2	-24.1	3.71 V	239	28.9	15.2
5	20565.00	56.2 PK	74.0	-17.8	2.50 V	116	59.5	-3.3
6	20565.00	45.2 AV	54.0	-8.8	2.50 V	116	48.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.7 PK	88.2	-26.5	2.57 H	144	57.4	4.3
2	#5925.00	44.4 AV	68.2	-23.8	2.57 H	144	40.1	4.3
3	*5955.00	110.4 PK			2.57 H	144	105.9	4.5
4	*5955.00	100.8 AV			2.57 H	144	96.3	4.5
5	11910.00	49.7 PK	74.0	-24.3	3.57 H	87	37.5	12.2
6	11910.00	39.7 AV	54.0	-14.3	3.57 H	87	27.5	12.2
7	17865.00	54.9 PK	74.0	-19.1	2.43 H	82	33.0	21.9
8	17865.00	44.1 AV	54.0	-9.9	2.43 H	82	22.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	1.74 V	87	70.4	4.3
2	#5925.00	56.9 AV	68.2	-11.3	1.74 V	87	52.6	4.3
3	*5955.00	119.3 PK			1.74 V	87	114.8	4.5
4	*5955.00	108.2 AV			1.74 V	87	103.7	4.5
5	11910.00	51.9 PK	74.0	-22.1	3.64 V	231	39.7	12.2
6	11910.00	41.9 AV	54.0	-12.1	3.64 V	231	29.7	12.2
7	17865.00	56.4 PK	74.0	-17.6	2.53 V	93	34.5	21.9
8	17865.00	44.8 AV	54.0	-9.2	2.53 V	93	22.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.7 PK			2.53 H	159	103.9	4.8
2	*6195.00	99.3 AV			2.53 H	159	94.5	4.8
3	12390.00	50.1 PK	74.0	-23.9	3.71 H	72	37.8	12.3
4	12390.00	40.5 AV	54.0	-13.5	3.71 H	72	28.2	12.3
5	18585.00	54.5 PK	74.0	-19.5	2.57 H	105	59.5	-5.0
6	18585.00	43.6 AV	54.0	-10.4	2.57 H	105	48.6	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.3 PK			1.82 V	89	115.5	4.8
2	*6195.00	108.9 AV			1.82 V	89	104.1	4.8
3	12390.00	52.4 PK	74.0	-21.6	3.67 V	257	40.1	12.3
4	12390.00	42.2 AV	54.0	-11.8	3.67 V	257	29.9	12.3
5	18585.00	56.1 PK	74.0	-17.9	2.56 V	82	61.1	-5.0
6	18585.00	44.8 AV	54.0	-9.2	2.56 V	82	49.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.7 PK			2.43 H	129	103.3	6.4
2	*6415.00	99.7 AV			2.43 H	129	93.3	6.4
3	#12830.00	50.7 PK	88.2	-37.5	3.77 H	77	37.7	13.0
4	#12830.00	39.7 AV	68.2	-28.5	3.77 H	77	26.7	13.0
5	19245.00	55.1 PK	74.0	-18.9	2.55 H	99	58.9	-3.8
6	19245.00	43.7 AV	54.0	-10.3	2.55 H	99	47.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.5 PK			1.79 V	101	115.1	6.4
2	*6415.00	110.1 AV			1.79 V	101	103.7	6.4
3	#12830.00	52.5 PK	88.2	-35.7	3.69 V	233	39.5	13.0
4	#12830.00	41.2 AV	68.2	-27.0	3.69 V	233	28.2	13.0
5	19245.00	56.1 PK	74.0	-17.9	2.60 V	88	59.9	-3.8
6	19245.00	45.3 AV	54.0	-8.7	2.60 V	88	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.8 PK			2.62 H	164	103.9	6.9
2	*6535.00	99.5 AV			2.62 H	164	92.6	6.9
3	#13070.00	50.3 PK	88.2	-37.9	3.67 H	93	37.1	13.2
4	#13070.00	38.9 AV	68.2	-29.3	3.67 H	93	25.7	13.2
5	19605.00	54.9 PK	74.0	-19.1	2.49 H	76	58.9	-4.0
6	19605.00	44.4 AV	54.0	-9.6	2.49 H	76	48.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.9 PK			1.82 V	107	115.0	6.9
2	*6535.00	110.5 AV			1.82 V	107	103.6	6.9
3	#13070.00	51.9 PK	88.2	-36.3	3.54 V	237	38.7	13.2
4	#13070.00	41.3 AV	68.2	-26.9	3.54 V	237	28.1	13.2
5	19605.00	56.1 PK	74.0	-17.9	2.56 V	83	60.1	-4.0
6	19605.00	45.1 AV	54.0	-8.9	2.56 V	83	49.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	109.5 PK			2.48 H	125	102.3	7.2
2	*6695.00	99.9 AV			2.48 H	125	92.7	7.2
3	13390.00	49.5 PK	74.0	-24.5	3.78 H	98	35.5	14.0
4	13390.00	39.3 AV	54.0	-14.7	3.78 H	98	25.3	14.0
5	20085.00	54.9 PK	74.0	-19.1	2.62 H	113	58.4	-3.5
6	20085.00	43.8 AV	54.0	-10.2	2.62 H	113	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.0 PK			1.79 V	82	114.8	7.2
2	*6695.00	110.8 AV			1.79 V	82	103.6	7.2
3	13390.00	51.4 PK	74.0	-22.6	3.69 V	260	37.4	14.0
4	13390.00	40.8 AV	54.0	-13.2	3.69 V	260	26.8	14.0
5	20085.00	55.9 PK	74.0	-18.1	2.59 V	96	59.4	-3.5
6	20085.00	44.1 AV	54.0	-9.9	2.59 V	96	47.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.9 PK			2.55 H	142	103.7	7.2
2	*6855.00	99.5 AV			2.55 H	142	92.3	7.2
3	#13710.00	49.5 PK	88.2	-38.7	3.67 H	72	34.3	15.2
4	#13710.00	38.3 AV	68.2	-29.9	3.67 H	72	23.1	15.2
5	20565.00	54.5 PK	74.0	-19.5	2.60 H	113	57.8	-3.3
6	20565.00	43.8 AV	54.0	-10.2	2.60 H	113	47.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.3 PK			1.72 V	106	114.1	7.2
2	*6855.00	110.3 AV			1.72 V	106	103.1	7.2
3	#13710.00	51.0 PK	88.2	-37.2	3.64 V	249	35.8	15.2
4	#13710.00	40.2 AV	68.2	-28.0	3.64 V	249	25.0	15.2
5	20565.00	55.7 PK	74.0	-18.3	2.60 V	101	59.0	-3.3
6	20565.00	43.9 AV	54.0	-10.1	2.60 V	101	47.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.5 PK	88.2	-24.7	3.50 H	62	59.2	4.3
2	#5925.00	42.8 AV	68.2	-25.4	3.50 H	62	38.5	4.3
3	*5955.00	111.0 PK			3.50 H	62	106.5	4.5
4	*5955.00	101.2 AV			3.50 H	62	96.7	4.5
5	11910.00	54.1 PK	74.0	-19.9	3.65 H	75	41.9	12.2
6	11910.00	39.9 AV	54.0	-14.1	3.65 H	75	27.7	12.2
7	17865.00	55.4 PK	74.0	-18.6	2.46 H	85	33.5	21.9
8	17865.00	44.2 AV	54.0	-9.8	2.46 H	85	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.7 PK	88.2	-13.5	1.88 V	98	70.4	4.3
2	#5925.00	52.0 AV	68.2	-16.2	1.88 V	98	47.7	4.3
3	*5955.00	120.9 PK			1.88 V	98	116.4	4.5
4	*5955.00	110.5 AV			1.88 V	98	106.0	4.5
5	11910.00	56.5 PK	74.0	-17.5	3.53 V	206	44.3	12.2
6	11910.00	42.3 AV	54.0	-11.7	3.53 V	206	30.1	12.2
7	17865.00	56.6 PK	74.0	-17.4	2.51 V	64	34.7	21.9
8	17865.00	45.8 AV	54.0	-8.2	2.51 V	64	23.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.9 PK			3.46 H	67	103.7	7.2
2	*6695.00	101.3 AV			3.46 H	67	94.1	7.2
3	13390.00	54.1 PK	74.0	-19.9	3.67 H	69	40.1	14.0
4	13390.00	40.0 AV	54.0	-14.0	3.67 H	69	26.0	14.0
5	20085.00	55.0 PK	74.0	-19.0	2.44 H	74	58.5	-3.5
6	20085.00	44.1 AV	54.0	-9.9	2.44 H	74	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.9 PK			1.82 V	107	113.7	7.2
2	*6695.00	110.7 AV			1.82 V	107	103.5	7.2
3	13390.00	56.5 PK	74.0	-17.5	3.59 V	218	42.5	14.0
4	13390.00	42.6 AV	54.0	-11.4	3.59 V	218	28.6	14.0
5	20085.00	56.6 PK	74.0	-17.4	2.54 V	49	60.1	-3.5
6	20085.00	45.5 AV	54.0	-8.5	2.54 V	49	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.9 PK	88.2	-30.3	3.50 H	62	53.6	4.3
2	#5925.00	46.4 AV	68.2	-21.8	3.50 H	62	42.1	4.3
3	*5955.00	108.8 PK			3.50 H	62	104.3	4.5
4	*5955.00	98.0 AV			3.50 H	62	93.5	4.5
5	11910.00	47.6 PK	74.0	-26.4	3.74 H	74	35.4	12.2
6	11910.00	37.8 AV	54.0	-16.2	3.74 H	74	25.6	12.2
7	17865.00	53.7 PK	74.0	-20.3	2.53 H	101	31.8	21.9
8	17865.00	43.7 AV	54.0	-10.3	2.53 H	101	21.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.5 PK	88.2	-14.7	1.83 V	92	69.2	4.3
2	#5925.00	55.7 AV	68.2	-12.5	1.83 V	92	51.4	4.3
3	*5955.00	118.3 PK			1.83 V	92	113.8	4.5
4	*5955.00	108.0 AV			1.83 V	92	103.5	4.5
5	11910.00	50.1 PK	74.0	-23.9	3.67 V	239	37.9	12.2
6	11910.00	39.8 AV	54.0	-14.2	3.67 V	239	27.6	12.2
7	17865.00	55.2 PK	74.0	-18.8	2.58 V	114	33.3	21.9
8	17865.00	44.5 AV	54.0	-9.5	2.58 V	114	22.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.2 PK			3.51 H	73	101.0	7.2
2	*6695.00	97.6 AV			3.51 H	73	90.4	7.2
3	13390.00	47.1 PK	74.0	-26.9	3.73 H	78	33.1	14.0
4	13390.00	37.4 AV	54.0	-16.6	3.73 H	78	23.4	14.0
5	20085.00	53.6 PK	74.0	-20.4	2.55 H	93	57.1	-3.5
6	20085.00	43.7 AV	54.0	-10.3	2.55 H	93	47.2	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.3 PK			1.87 V	100	111.1	7.2
2	*6695.00	108.1 AV			1.87 V	100	100.9	7.2
3	13390.00	50.1 PK	74.0	-23.9	3.63 V	228	36.1	14.0
4	13390.00	39.8 AV	54.0	-14.2	3.63 V	228	25.8	14.0
5	20085.00	54.8 PK	74.0	-19.2	2.53 V	106	58.3	-3.5
6	20085.00	44.2 AV	54.0	-9.8	2.53 V	106	47.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.0 PK	88.2	-30.2	3.46 H	63	53.7	4.3
2	#5925.00	43.5 AV	68.2	-24.7	3.46 H	63	39.2	4.3
3	*5985.00	100.5 PK			3.46 H	63	96.1	4.4
4	*5985.00	88.3 AV			3.46 H	63	83.9	4.4
5	11970.00	43.9 PK	74.0	-30.1	3.63 H	71	31.7	12.2
6	11970.00	33.4 AV	54.0	-20.6	3.63 H	71	21.2	12.2
7	17955.00	51.6 PK	74.0	-22.4	2.45 H	75	28.2	23.4
8	17955.00	41.6 AV	54.0	-12.4	2.45 H	75	18.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.5 PK	88.2	-9.7	3.46 V	87	74.2	4.3
2	#5925.00	64.7 AV	68.2	-3.5	3.46 V	87	60.4	4.3
3	*5985.00	111.0 PK			3.46 V	87	106.6	4.4
4	*5985.00	99.2 AV			3.46 V	87	94.8	4.4
5	11970.00	46.4 PK	74.0	-27.6	3.57 V	233	34.2	12.2
6	11970.00	35.7 AV	54.0	-18.3	3.57 V	233	23.5	12.2
7	17955.00	53.2 PK	74.0	-20.8	2.67 V	84	29.8	23.4
8	17955.00	41.8 AV	54.0	-12.2	2.67 V	84	18.4	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	100.5 PK			3.48 H	70	93.3	7.2
2	*6705.00	88.2 AV			3.48 H	70	81.0	7.2
3	#13410.00	44.1 PK	88.2	-44.1	3.66 H	62	29.9	14.2
4	#13410.00	33.9 AV	68.2	-34.3	3.66 H	62	19.7	14.2
5	20115.00	52.3 PK	74.0	-21.7	2.47 H	62	55.8	-3.5
6	20115.00	42.0 AV	54.0	-12.0	2.47 H	62	45.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.8 PK			3.52 V	93	103.6	7.2
2	*6705.00	99.2 AV			3.52 V	93	92.0	7.2
3	#13410.00	46.5 PK	88.2	-41.7	3.57 V	227	32.3	14.2
4	#13410.00	35.8 AV	68.2	-32.4	3.57 V	227	21.6	14.2
5	20115.00	53.1 PK	74.0	-20.9	2.71 V	88	56.6	-3.5
6	20115.00	41.4 AV	54.0	-12.6	2.71 V	88	44.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.5 PK	88.2	-21.7	2.39 H	125	62.2	4.3
2	#5925.00	51.4 AV	68.2	-16.8	2.39 H	125	47.1	4.3
3	*6025.00	96.3 PK			2.39 H	125	92.1	4.2
4	*6025.00	85.0 AV			2.39 H	125	80.8	4.2
5	12050.00	43.4 PK	74.0	-30.6	3.82 H	83	31.0	12.4
6	12050.00	33.2 AV	54.0	-20.8	3.82 H	83	20.8	12.4
7	18075.00	52.9 PK	74.0	-21.1	2.51 H	89	57.6	-4.7
8	18075.00	42.2 AV	54.0	-11.8	2.51 H	89	46.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	1.82 V	83	72.0	4.3
2	#5925.00	60.6 AV	68.2	-7.6	1.82 V	83	56.3	4.3
3	*6025.00	107.4 PK			1.82 V	83	103.2	4.2
4	*6025.00	95.2 AV			1.82 V	83	91.0	4.2
5	12050.00	45.1 PK	74.0	-28.9	1.15 V	229	32.7	12.4
6	12050.00	34.7 AV	54.0	-19.3	1.15 V	229	22.3	12.4
7	18075.00	54.5 PK	74.0	-19.5	2.09 V	96	59.2	-4.7
8	18075.00	43.0 AV	54.0	-11.0	2.09 V	96	47.7	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.6 PK			2.36 H	141	89.4	7.2
2	*6665.00	85.1 AV			2.36 H	141	77.9	7.2
3	13330.00	43.7 PK	74.0	-30.3	3.77 H	70	29.9	13.8
4	13330.00	33.4 AV	54.0	-20.6	3.77 H	70	19.6	13.8
5	19995.00	53.4 PK	74.0	-20.6	2.55 H	82	57.0	-3.6
6	19995.00	42.6 AV	54.0	-11.4	2.55 H	82	46.2	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.2 PK			1.76 V	95	100.0	7.2
2	*6665.00	94.8 AV			1.76 V	95	87.6	7.2
3	13330.00	44.8 PK	74.0	-29.2	1.18 V	239	31.0	13.8
4	13330.00	34.3 AV	54.0	-19.7	1.18 V	239	20.5	13.8
5	19995.00	54.4 PK	74.0	-19.6	2.12 V	104	58.0	-3.6
6	19995.00	42.8 AV	54.0	-11.2	2.12 V	104	46.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.8 PK	88.2	-15.4	2.50 H	134	68.5	4.3
2	#5925.00	54.2 AV	68.2	-14.0	2.50 H	134	49.9	4.3
3	*6025.00	96.7 PK			2.50 H	134	92.5	4.2
4	*6025.00	85.4 AV			2.50 H	134	81.2	4.2
5	12050.00	43.1 PK	74.0	-30.9	1.05 H	193	30.7	12.4
6	12050.00	32.5 AV	54.0	-21.5	1.05 H	193	20.1	12.4
7	18075.00	52.8 PK	74.0	-21.2	1.98 H	247	57.5	-4.7
8	18075.00	42.3 AV	54.0	-11.7	1.98 H	247	47.0	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.1 PK	88.2	-9.1	1.83 V	79	74.8	4.3
2	#5925.00	62.9 AV	68.2	-5.3	1.83 V	79	58.6	4.3
3	*6025.00	106.5 PK			1.83 V	79	102.3	4.2
4	*6025.00	94.8 AV			1.83 V	79	90.6	4.2
5	12050.00	45.4 PK	74.0	-28.6	1.18 V	64	33.0	12.4
6	12050.00	34.7 AV	54.0	-19.3	1.18 V	64	22.3	12.4
7	18075.00	54.6 PK	74.0	-19.4	2.14 V	195	59.3	-4.7
8	18075.00	43.6 AV	54.0	-10.4	2.14 V	195	48.3	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.9 PK			2.52 H	136	89.7	7.2
2	*6665.00	85.3 AV			2.52 H	136	78.1	7.2
3	13330.00	43.5 PK	74.0	-30.5	1.09 H	208	29.7	13.8
4	13330.00	32.6 AV	54.0	-21.4	1.09 H	208	18.8	13.8
5	19995.00	53.2 PK	74.0	-20.8	2.00 H	247	56.8	-3.6
6	19995.00	42.7 AV	54.0	-11.3	2.00 H	247	46.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.5 PK			1.80 V	71	99.3	7.2
2	*6665.00	94.6 AV			1.80 V	71	87.4	7.2
3	13330.00	45.9 PK	74.0	-28.1	1.14 V	50	32.1	13.8
4	13330.00	35.2 AV	54.0	-18.8	1.14 V	50	21.4	13.8
5	19995.00	54.9 PK	74.0	-19.1	2.19 V	189	58.5	-3.6
6	19995.00	43.8 AV	54.0	-10.2	2.19 V	189	47.4	-3.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


1Tx

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

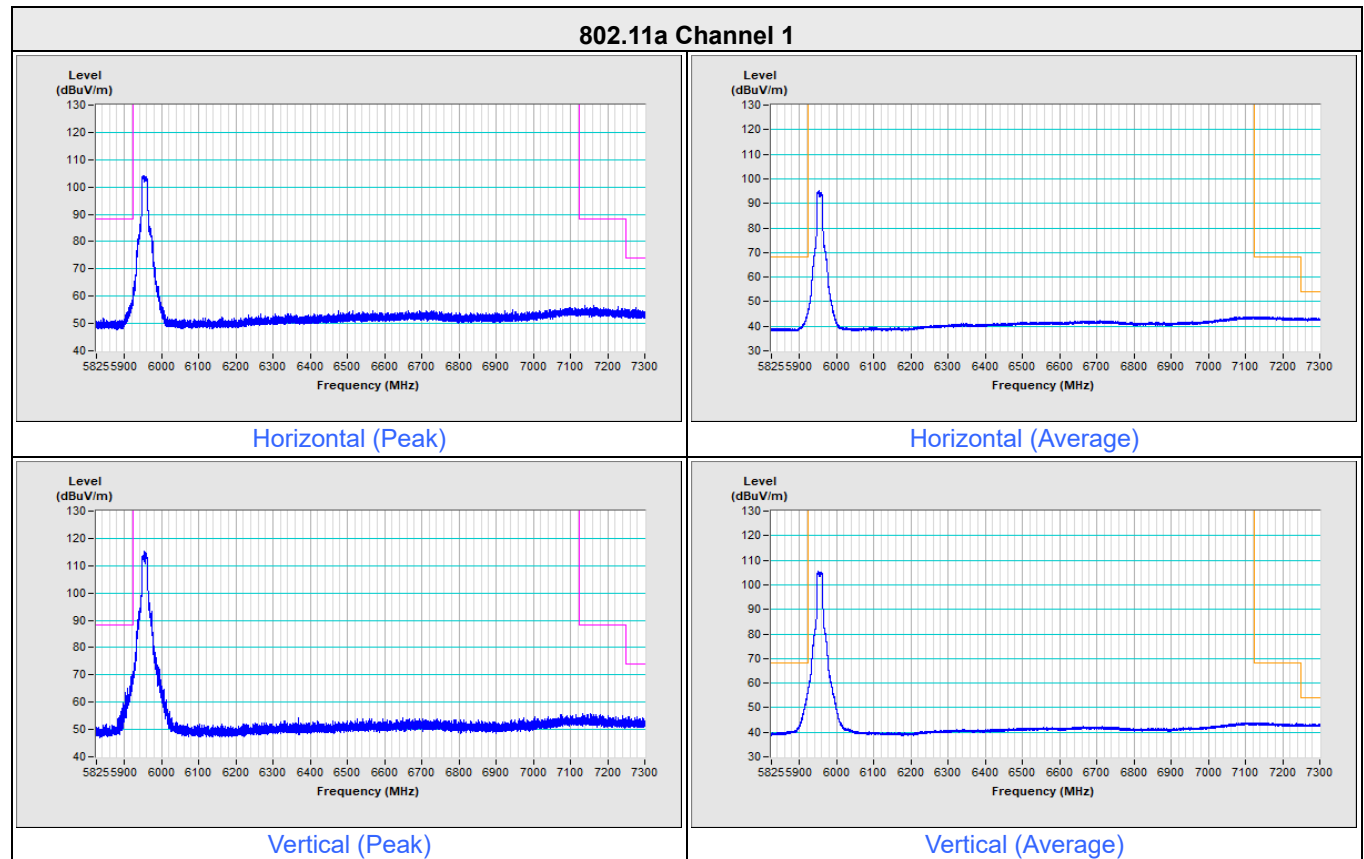


1Tx NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

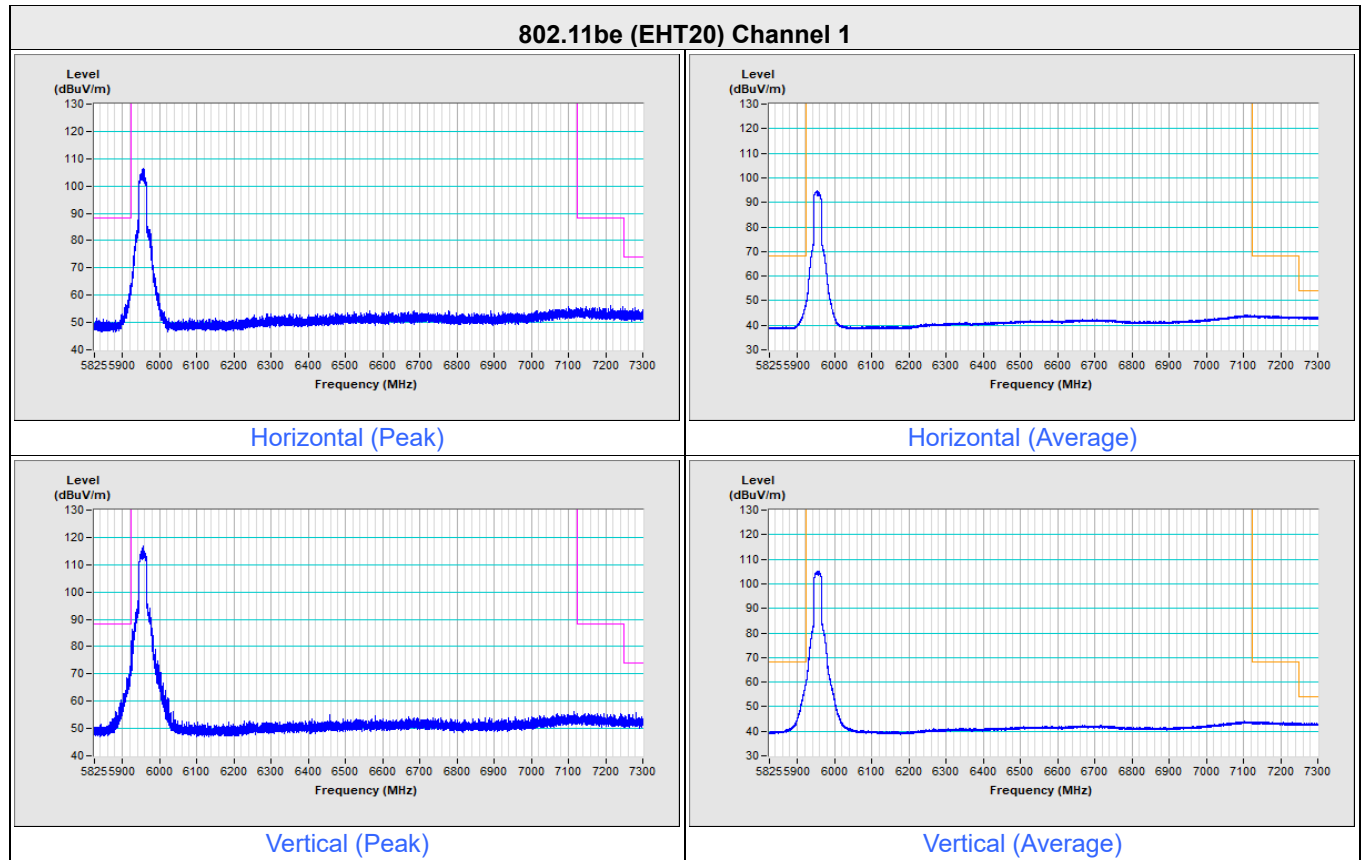


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

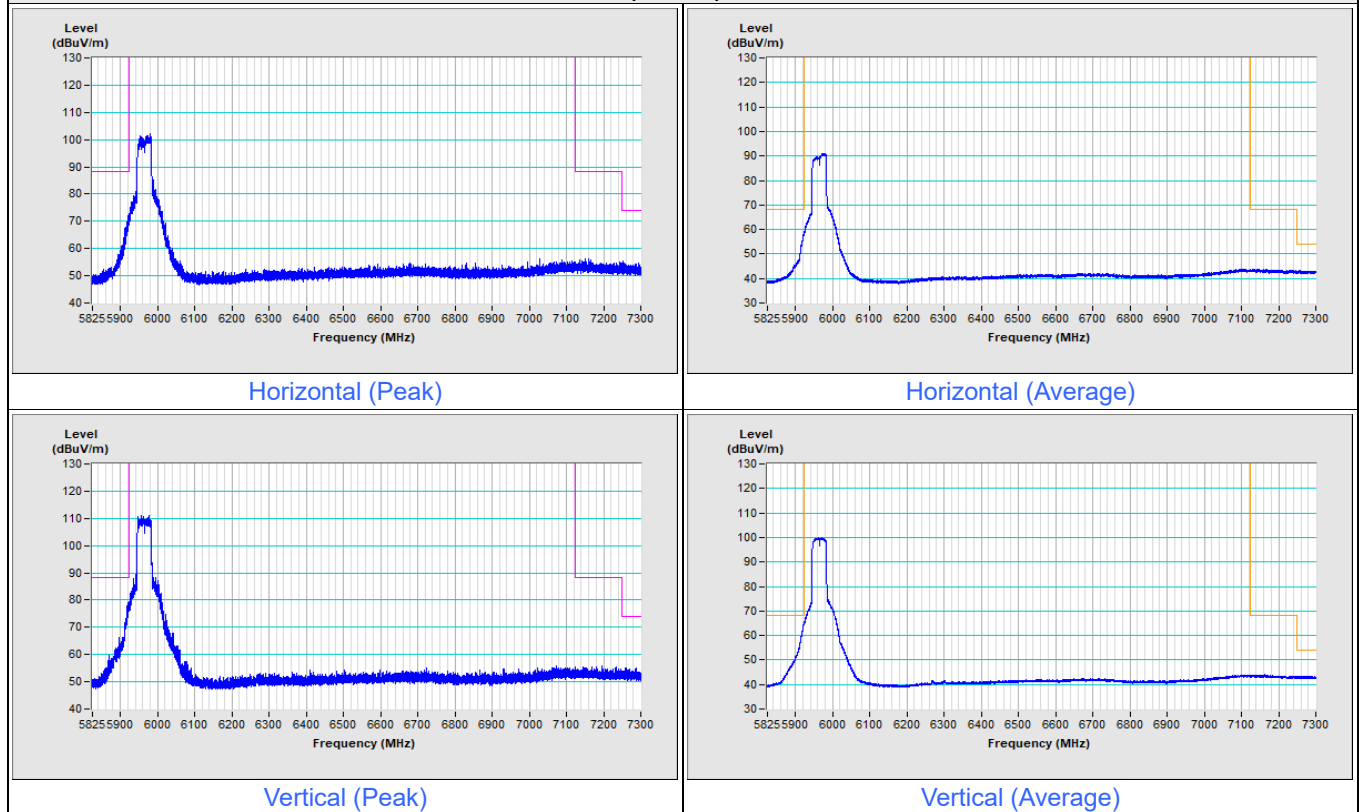


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

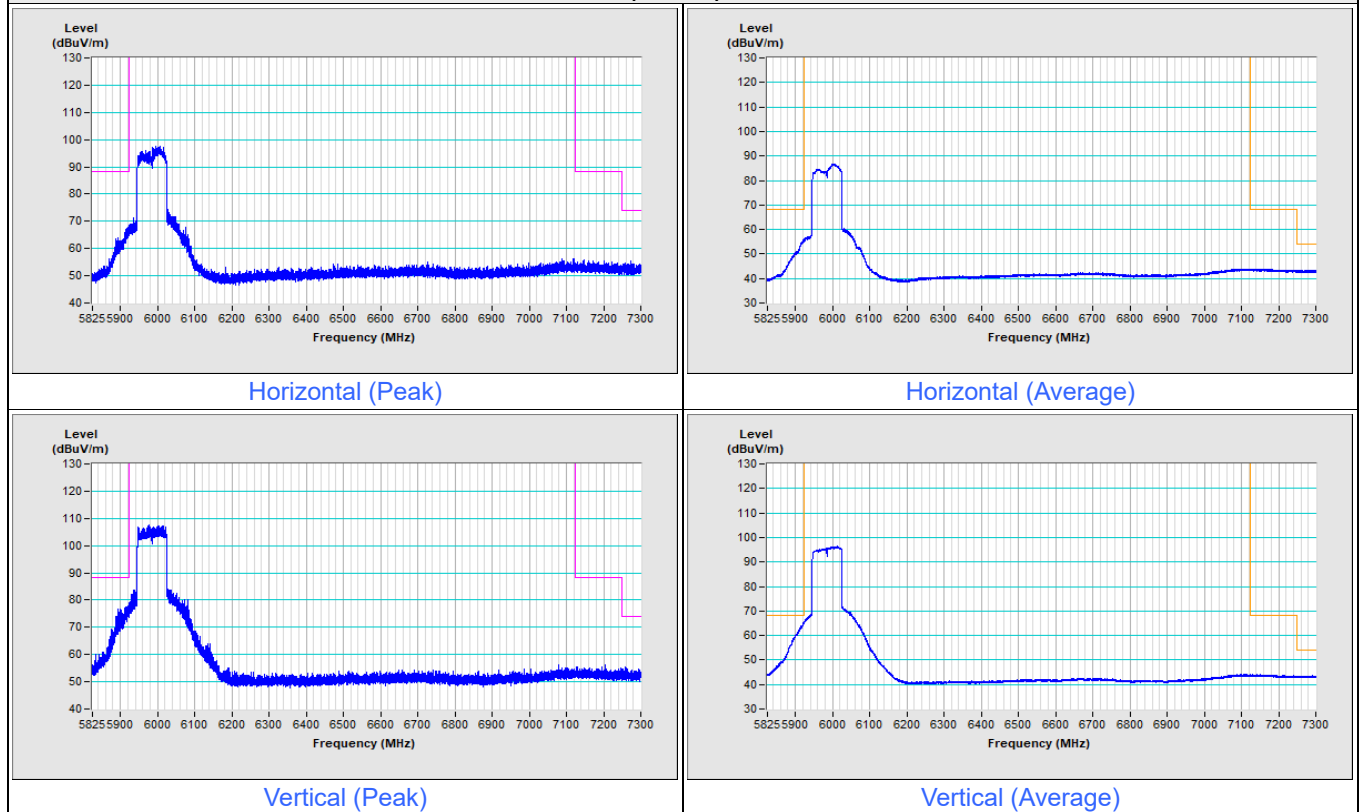


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

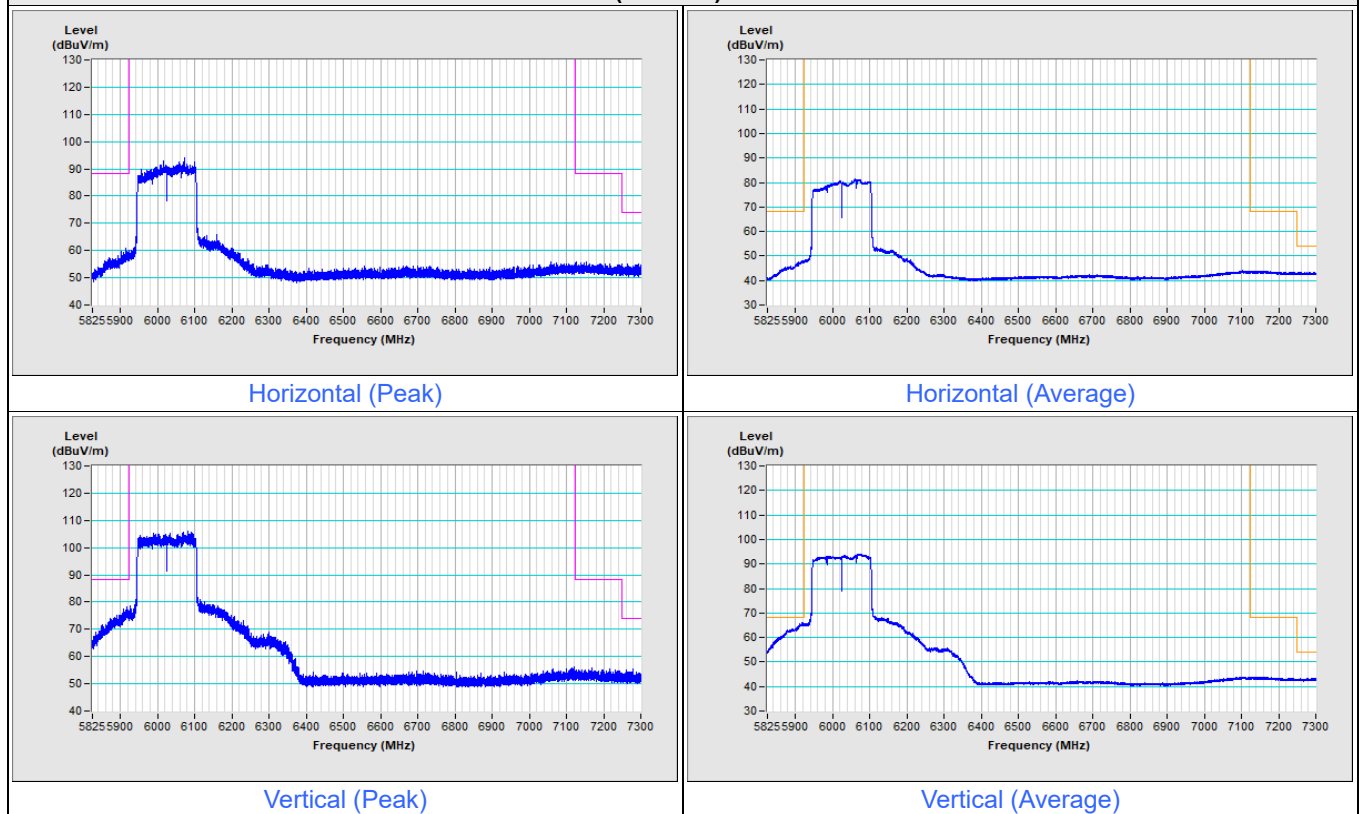


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

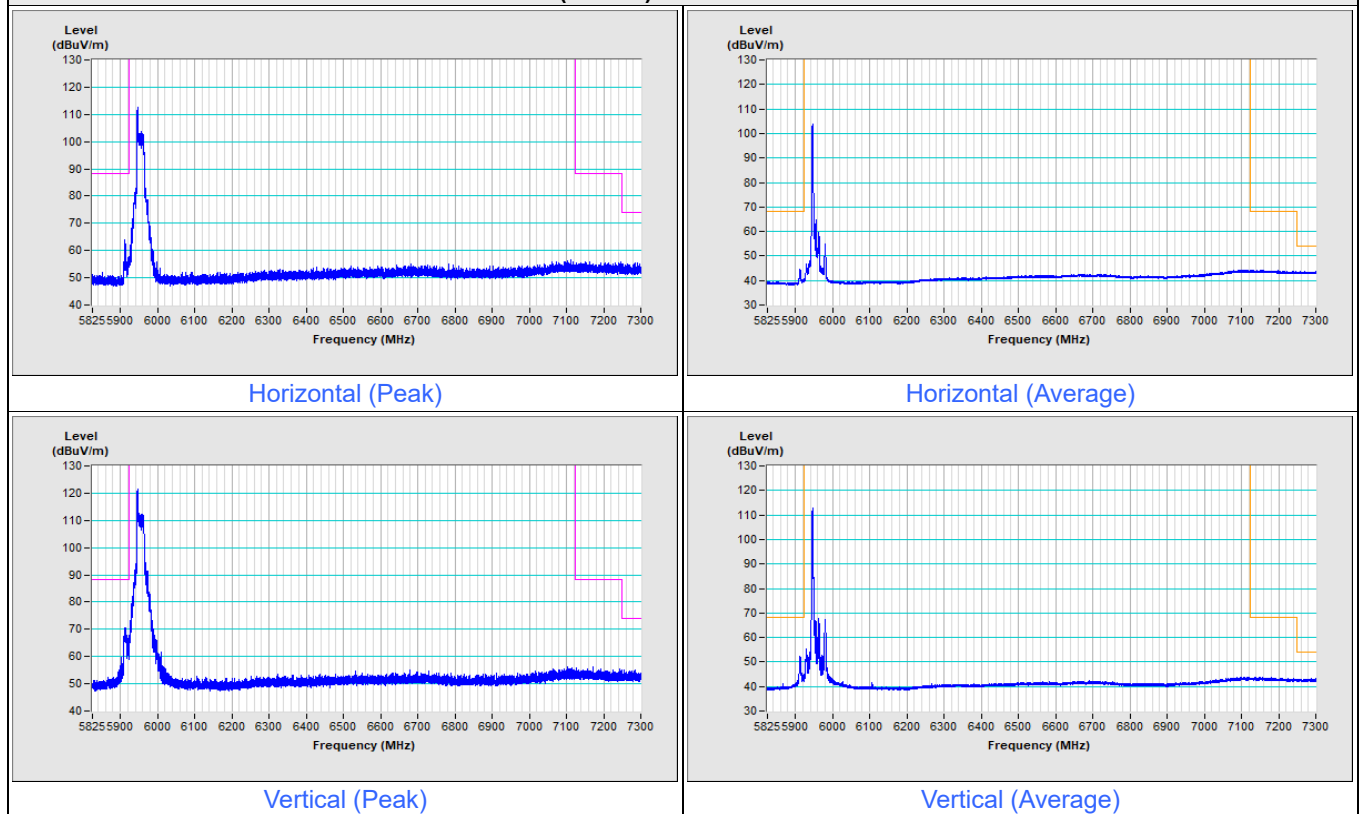


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

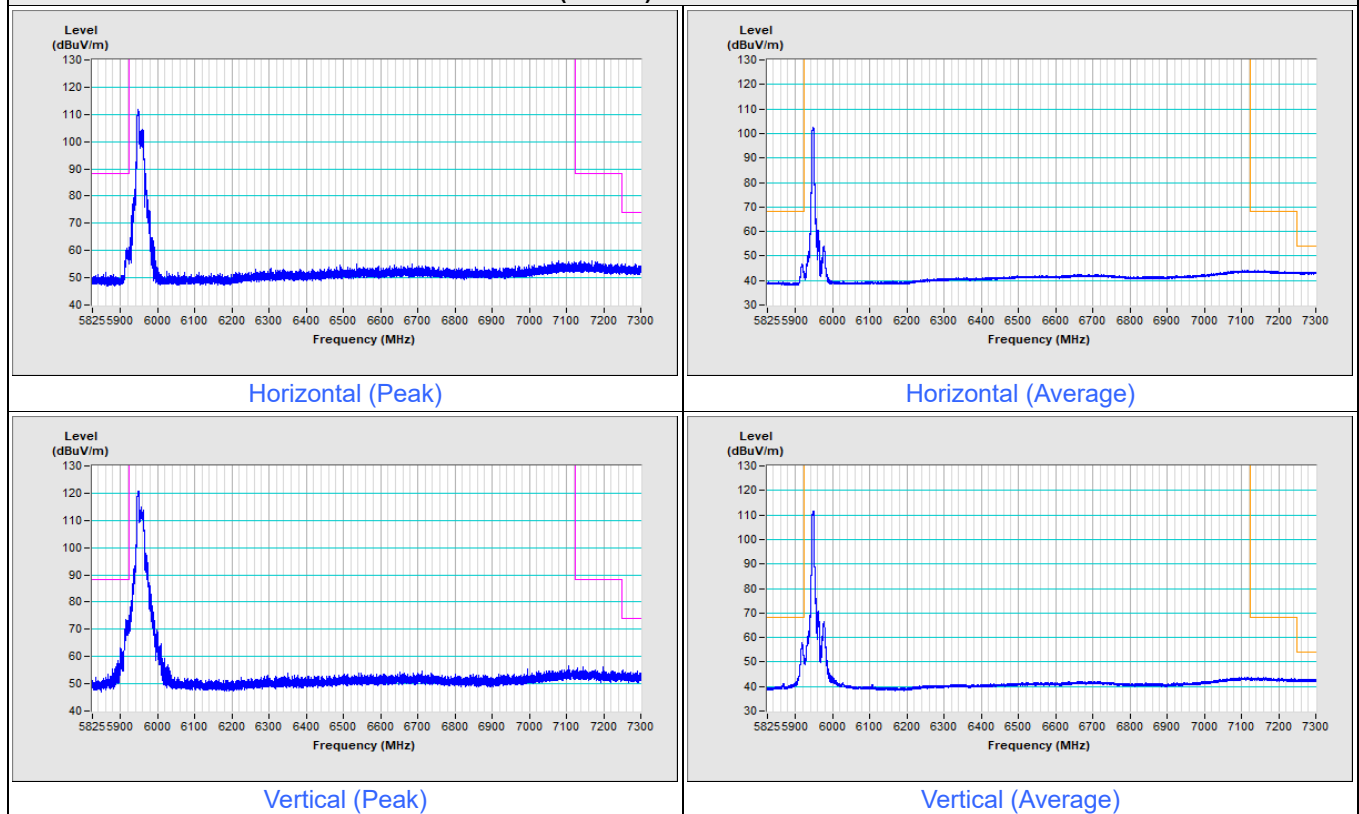


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

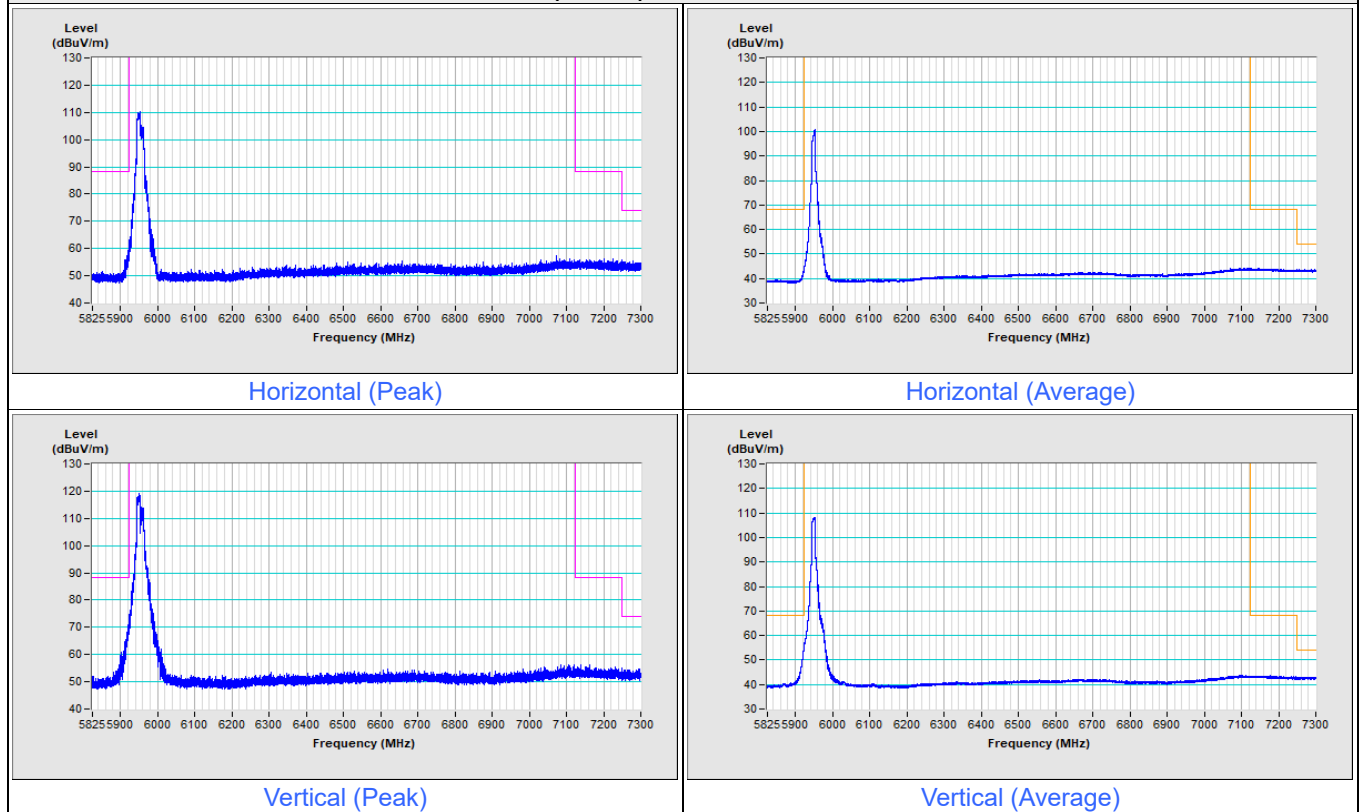


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

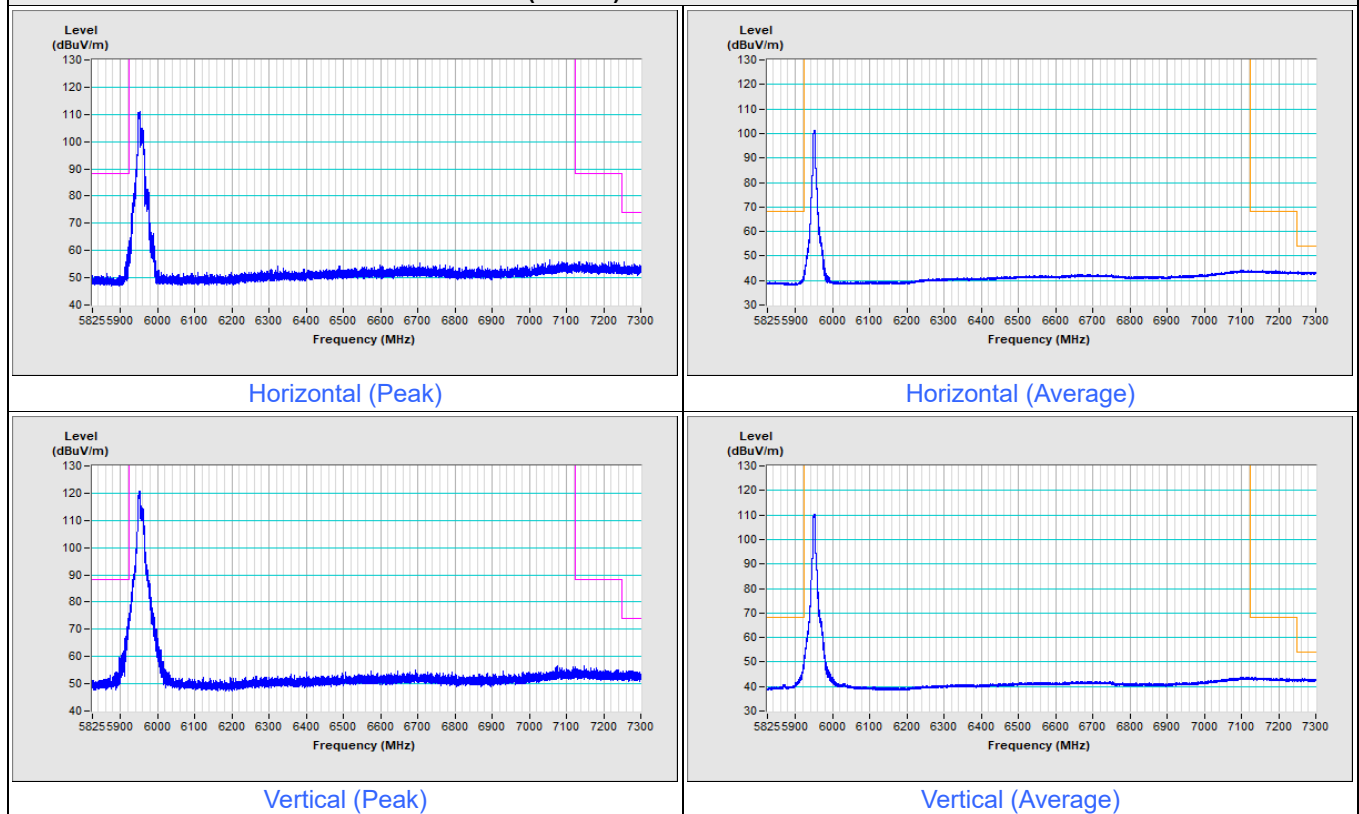


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

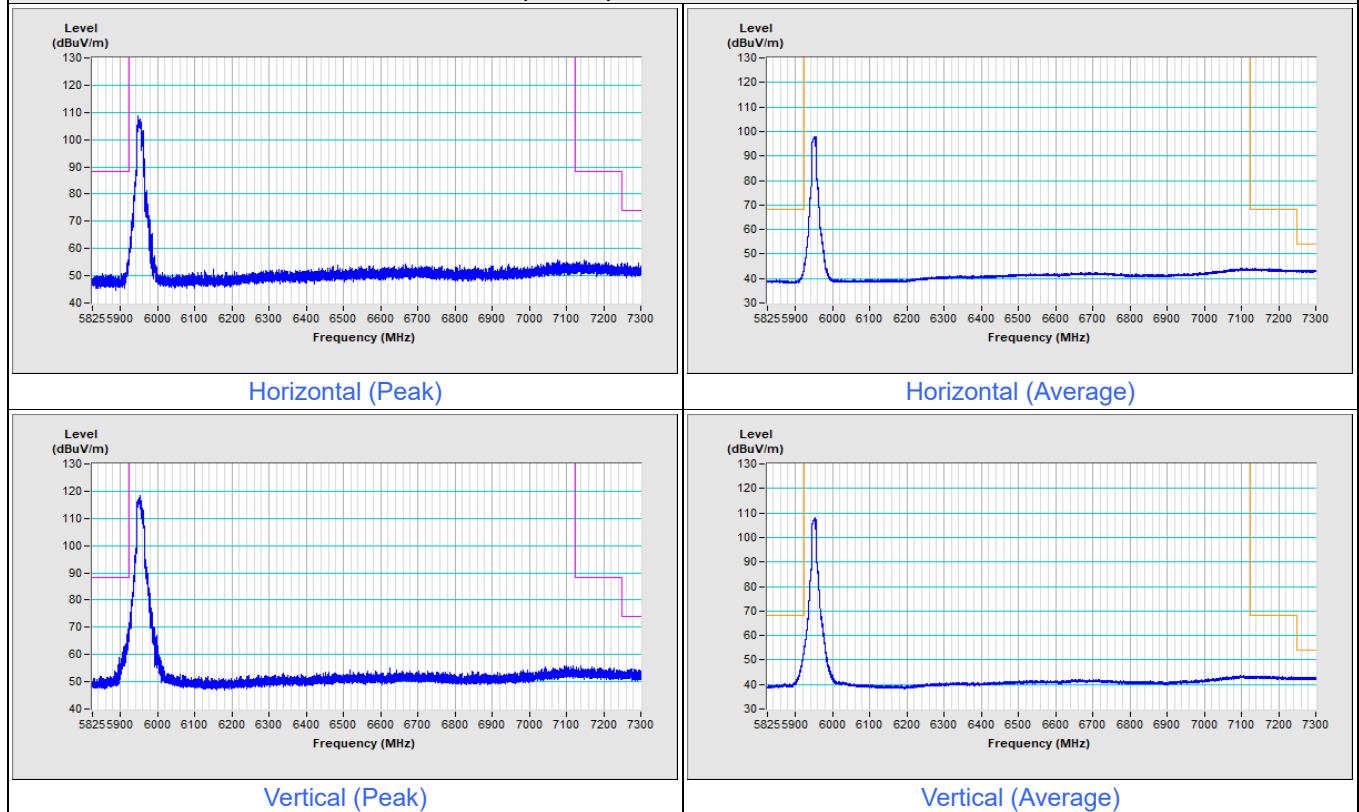


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 7

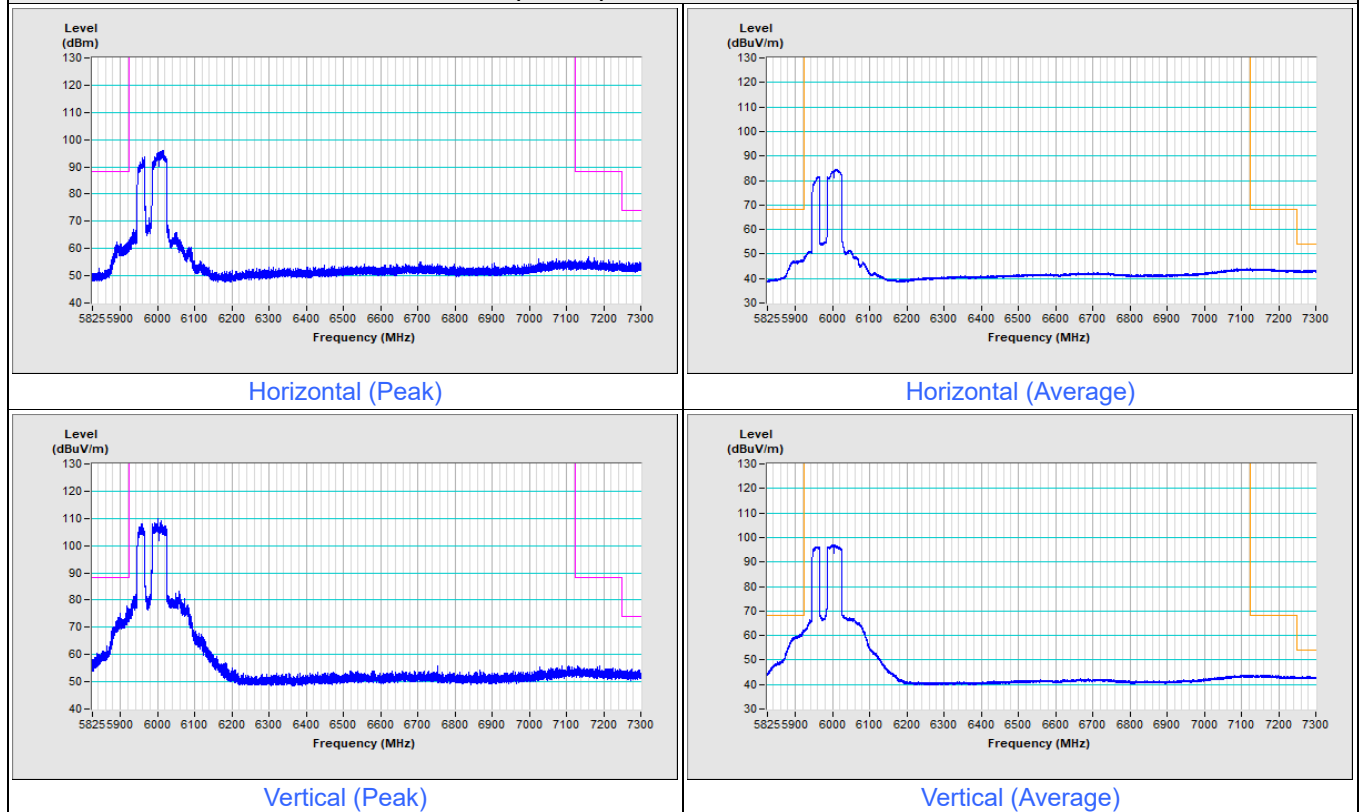


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 15

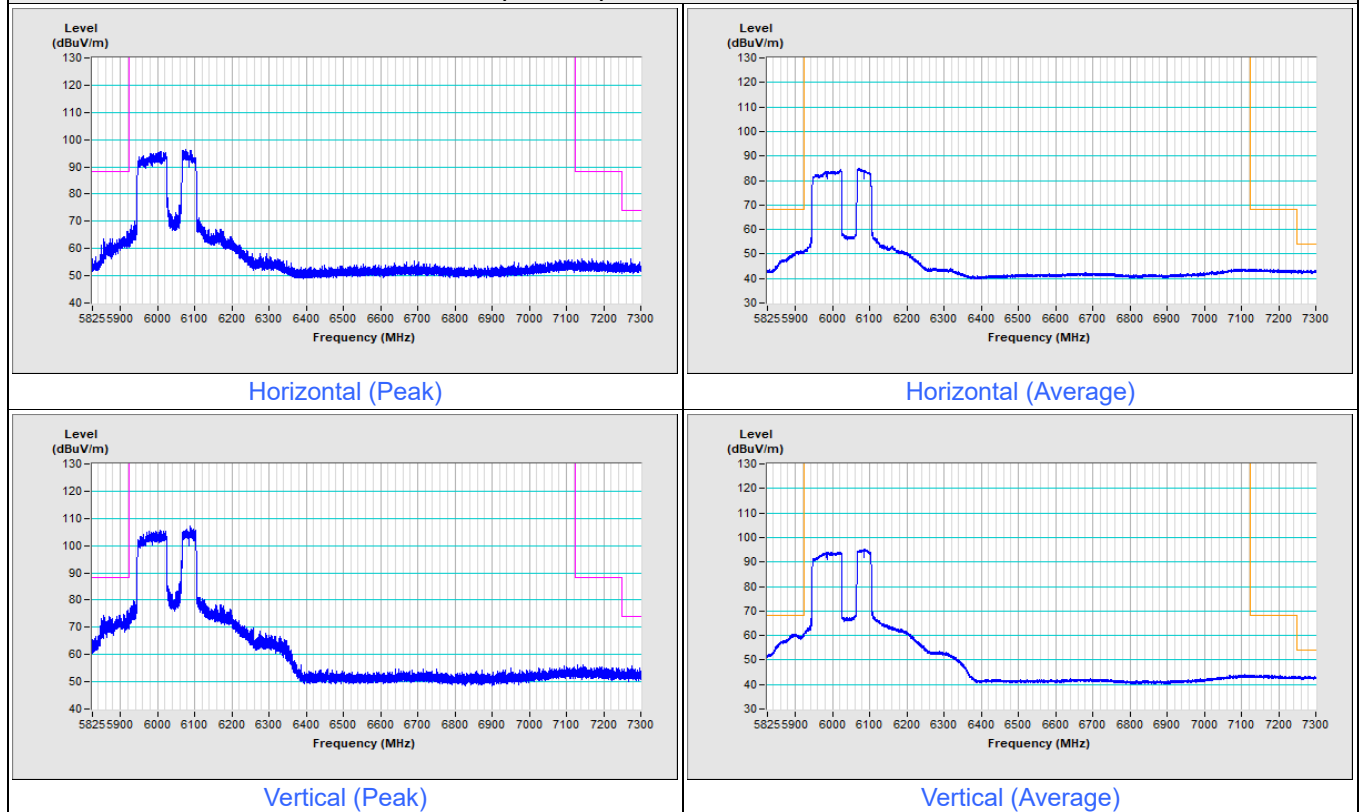

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 15

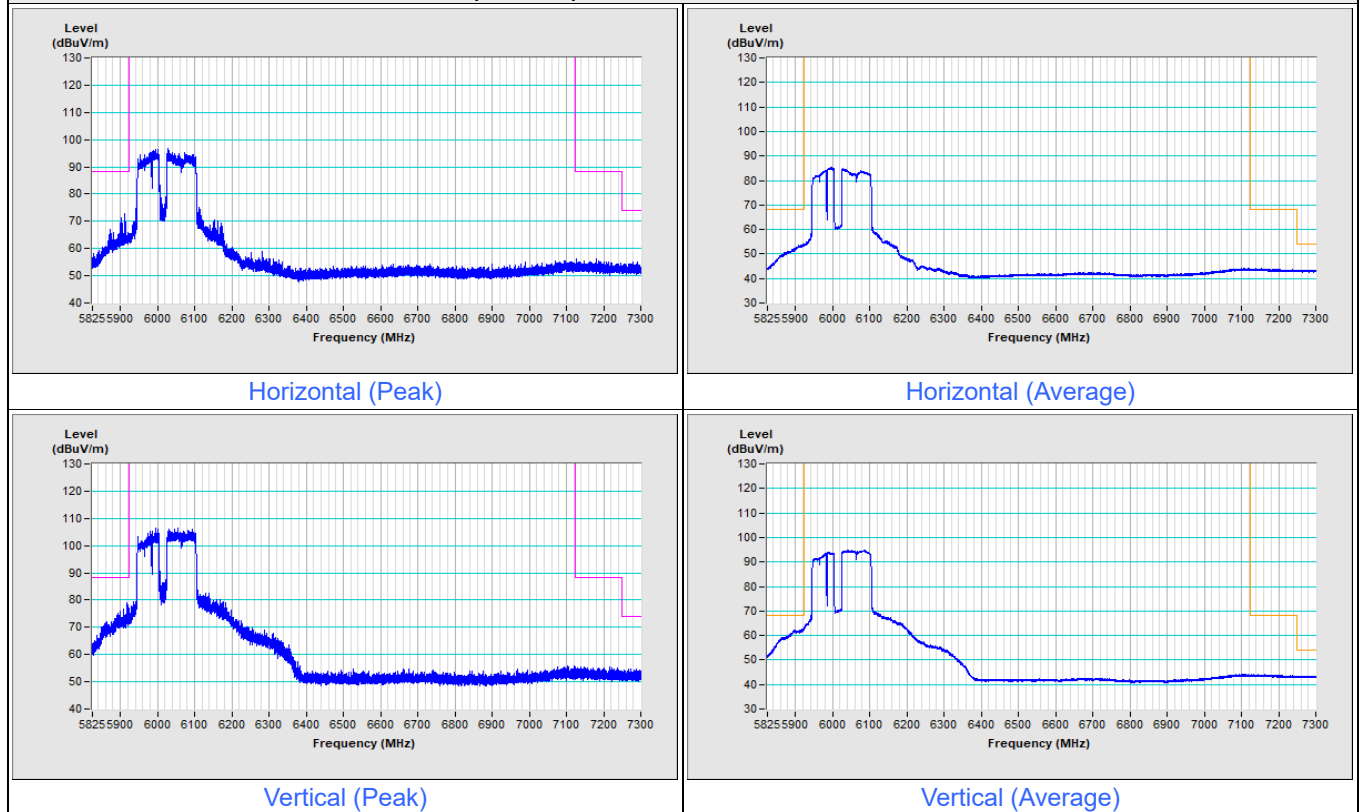

Mode C

2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.8 PK	88.2	-33.4	1.46 H	189	50.5	4.3
2	#5925.00	41.4 AV	68.2	-26.8	1.46 H	189	37.1	4.3
3	*5955.00	103.6 PK			1.46 H	189	99.1	4.5
4	*5955.00	94.4 AV			1.46 H	189	89.9	4.5
5	11910.00	52.2 PK	74.0	-21.8	3.58 H	205	40.0	12.2
6	11910.00	39.5 AV	54.0	-14.5	3.58 H	205	27.3	12.2
7	17865.00	55.6 PK	74.0	-18.4	2.93 H	320	33.7	21.9
8	17865.00	44.1 AV	54.0	-9.9	2.93 H	320	22.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.3 PK	88.2	-21.9	1.47 V	264	62.0	4.3
2	#5925.00	53.2 AV	68.2	-15.0	1.47 V	264	48.9	4.3
3	*5955.00	116.1 PK			1.47 V	264	111.6	4.5
4	*5955.00	107.3 AV			1.47 V	264	102.8	4.5
5	11910.00	54.0 PK	74.0	-20.0	3.95 V	319	41.8	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.95 V	319	29.6	12.2
7	17865.00	57.4 PK	74.0	-16.6	3.34 V	166	35.5	21.9
8	17865.00	45.8 AV	54.0	-8.2	3.34 V	166	23.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	103.7 PK			2.35 H	125	98.9	4.8
2	*6195.00	94.9 AV			2.35 H	125	90.1	4.8
3	12390.00	52.8 PK	74.0	-21.2	3.47 H	210	40.5	12.3
4	12390.00	39.4 AV	54.0	-14.6	3.47 H	210	27.1	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.04 H	282	60.2	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.04 H	282	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.1 PK			1.82 V	85	110.3	4.8
2	*6195.00	107.5 AV			1.82 V	85	102.7	4.8
3	12390.00	54.4 PK	74.0	-19.6	3.81 V	339	42.1	12.3
4	12390.00	41.8 AV	54.0	-12.2	3.81 V	339	29.5	12.3
5	18585.00	57.2 PK	74.0	-16.8	3.44 V	176	62.2	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.44 V	176	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.4 PK			2.69 H	97	97.0	6.4
2	*6415.00	95.3 AV			2.69 H	97	88.9	6.4
3	#12830.00	52.4 PK	88.2	-35.8	3.52 H	192	39.4	13.0
4	#12830.00	39.1 AV	68.2	-29.1	3.52 H	192	26.1	13.0
5	19245.00	54.8 PK	74.0	-19.2	3.07 H	314	58.6	-3.8
6	19245.00	43.2 AV	54.0	-10.8	3.07 H	314	47.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.9 PK			1.90 V	86	111.5	6.4
2	*6415.00	109.0 AV			1.90 V	86	102.6	6.4
3	#12830.00	54.3 PK	88.2	-33.9	3.77 V	338	41.3	13.0
4	#12830.00	41.4 AV	68.2	-26.8	3.77 V	338	28.4	13.0
5	19245.00	56.9 PK	74.0	-17.1	3.12 V	174	60.7	-3.8
6	19245.00	45.7 AV	54.0	-8.3	3.12 V	174	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.4 PK			2.86 H	130	98.5	6.9
2	*6535.00	96.1 AV			2.86 H	130	89.2	6.9
3	#13070.00	52.9 PK	88.2	-35.3	3.59 H	213	39.7	13.2
4	#13070.00	39.9 AV	68.2	-28.3	3.59 H	213	26.7	13.2
5	19605.00	55.5 PK	74.0	-18.5	2.98 H	310	59.5	-4.0
6	19605.00	43.5 AV	54.0	-10.5	2.98 H	310	47.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.4 PK			1.89 V	86	111.5	6.9
2	*6535.00	109.9 AV			1.89 V	86	103.0	6.9
3	#13070.00	54.6 PK	88.2	-33.6	3.97 V	319	41.4	13.2
4	#13070.00	42.2 AV	68.2	-26.0	3.97 V	319	29.0	13.2
5	19605.00	57.0 PK	74.0	-17.0	3.45 V	173	61.0	-4.0
6	19605.00	45.6 AV	54.0	-8.4	3.45 V	173	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.4 PK			2.68 H	131	99.2	7.2
2	*6695.00	97.5 AV			2.68 H	131	90.3	7.2
3	13390.00	51.6 PK	74.0	-22.4	3.47 H	213	37.6	14.0
4	13390.00	40.1 AV	54.0	-13.9	3.47 H	213	26.1	14.0
5	20085.00	55.4 PK	74.0	-18.6	2.95 H	290	58.9	-3.5
6	20085.00	43.2 AV	54.0	-10.8	2.95 H	290	46.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.8 PK			1.86 V	86	111.6	7.2
2	*6695.00	110.2 AV			1.86 V	86	103.0	7.2
3	13390.00	53.9 PK	74.0	-20.1	3.78 V	325	39.9	14.0
4	13390.00	42.1 AV	54.0	-11.9	3.78 V	325	28.1	14.0
5	20085.00	57.0 PK	74.0	-17.0	3.39 V	196	60.5	-3.5
6	20085.00	45.7 AV	54.0	-8.3	3.39 V	196	49.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.6 PK			2.64 H	131	100.4	7.2
2	*6855.00	98.5 AV			2.64 H	131	91.3	7.2
3	#13710.00	51.9 PK	88.2	-36.3	3.57 H	192	36.7	15.2
4	#13710.00	40.7 AV	68.2	-27.5	3.57 H	192	25.5	15.2
5	20565.00	55.9 PK	74.0	-18.1	3.02 H	283	59.2	-3.3
6	20565.00	44.9 AV	54.0	-9.1	3.02 H	283	48.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.5 PK			1.67 V	265	110.3	7.2
2	*6855.00	108.7 AV			1.67 V	265	101.5	7.2
3	#13710.00	53.8 PK	88.2	-34.4	4.00 V	341	38.6	15.2
4	#13710.00	42.3 AV	68.2	-25.9	4.00 V	341	27.1	15.2
5	20565.00	57.6 PK	74.0	-16.4	3.45 V	162	60.9	-3.3
6	20565.00	46.4 AV	54.0	-7.6	3.45 V	162	49.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.0 PK	88.2	-24.2	2.47 H	218	59.7	4.3
2	#5925.00	47.3 AV	68.2	-20.9	2.47 H	218	43.0	4.3
3	*5955.00	104.6 PK			2.47 H	218	100.1	4.5
4	*5955.00	93.4 AV			2.47 H	218	88.9	4.5
5	11910.00	52.2 PK	74.0	-21.8	3.50 H	219	40.0	12.2
6	11910.00	40.0 AV	54.0	-14.0	3.50 H	219	27.8	12.2
7	17865.00	55.2 PK	74.0	-18.8	2.87 H	319	33.3	21.9
8	17865.00	44.4 AV	54.0	-9.6	2.87 H	319	22.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.8 PK	88.2	-19.4	1.46 V	264	64.5	4.3
2	#5925.00	61.2 AV	68.2	-7.0	1.46 V	264	56.9	4.3
3	*5955.00	117.7 PK			1.46 V	264	113.2	4.5
4	*5955.00	106.0 AV			1.46 V	264	101.5	4.5
5	11910.00	54.1 PK	74.0	-19.9	3.89 V	303	41.9	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.89 V	303	29.6	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.26 V	182	35.4	21.9
8	17865.00	46.3 AV	54.0	-7.7	3.26 V	182	24.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	104.9 PK			2.36 H	130	100.1	4.8
2	*6195.00	94.2 AV			2.36 H	130	89.4	4.8
3	12390.00	51.5 PK	74.0	-22.5	3.40 H	202	39.2	12.3
4	12390.00	40.1 AV	54.0	-13.9	3.40 H	202	27.8	12.3
5	18585.00	54.9 PK	74.0	-19.1	2.96 H	316	59.9	-5.0
6	18585.00	44.4 AV	54.0	-9.6	2.96 H	316	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			1.81 V	85	111.8	4.8
2	*6195.00	105.8 AV			1.81 V	85	101.0	4.8
3	12390.00	53.8 PK	74.0	-20.2	3.73 V	322	41.5	12.3
4	12390.00	41.9 AV	54.0	-12.1	3.73 V	322	29.6	12.3
5	18585.00	56.7 PK	74.0	-17.3	3.30 V	164	61.7	-5.0
6	18585.00	46.3 AV	54.0	-7.7	3.30 V	164	51.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.6 PK			2.53 H	98	99.2	6.4
2	*6415.00	96.2 AV			2.53 H	98	89.8	6.4
3	#12830.00	51.6 PK	88.2	-36.6	3.58 H	198	38.6	13.0
4	#12830.00	39.7 AV	68.2	-28.5	3.58 H	198	26.7	13.0
5	19245.00	55.2 PK	74.0	-18.8	2.97 H	304	59.0	-3.8
6	19245.00	43.9 AV	54.0	-10.1	2.97 H	304	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			1.89 V	86	112.1	6.4
2	*6415.00	107.8 AV			1.89 V	86	101.4	6.4
3	#12830.00	53.7 PK	88.2	-34.5	3.87 V	348	40.7	13.0
4	#12830.00	41.4 AV	68.2	-26.8	3.87 V	348	28.4	13.0
5	19245.00	57.4 PK	74.0	-16.6	3.32 V	200	61.2	-3.8
6	19245.00	46.2 AV	54.0	-7.8	3.32 V	200	50.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.2 PK			2.49 H	93	98.3	6.9
2	*6535.00	96.0 AV			2.49 H	93	89.1	6.9
3	#13070.00	52.2 PK	88.2	-36.0	3.30 H	229	39.0	13.2
4	#13070.00	40.1 AV	68.2	-28.1	3.30 H	229	26.9	13.2
5	19605.00	55.1 PK	74.0	-18.9	2.78 H	314	59.1	-4.0
6	19605.00	44.3 AV	54.0	-9.7	2.78 H	314	48.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.3 PK			1.89 V	86	112.4	6.9
2	*6535.00	109.1 AV			1.89 V	86	102.2	6.9
3	#13070.00	54.3 PK	88.2	-33.9	3.94 V	339	41.1	13.2
4	#13070.00	41.8 AV	68.2	-26.4	3.94 V	339	28.6	13.2
5	19605.00	57.3 PK	74.0	-16.7	3.32 V	180	61.3	-4.0
6	19605.00	45.8 AV	54.0	-8.2	3.32 V	180	49.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.1 PK			2.52 H	98	97.9	7.2
2	*6695.00	95.7 AV			2.52 H	98	88.5	7.2
3	13390.00	52.1 PK	74.0	-21.9	3.43 H	204	38.1	14.0
4	13390.00	39.6 AV	54.0	-14.4	3.43 H	204	25.6	14.0
5	20085.00	54.4 PK	74.0	-19.6	3.12 H	308	57.9	-3.5
6	20085.00	44.2 AV	54.0	-9.8	3.12 H	308	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.7 PK			1.85 V	87	112.5	7.2
2	*6695.00	108.6 AV			1.85 V	87	101.4	7.2
3	13390.00	54.3 PK	74.0	-19.7	3.73 V	311	40.3	14.0
4	13390.00	41.8 AV	54.0	-12.2	3.73 V	311	27.8	14.0
5	20085.00	56.8 PK	74.0	-17.2	3.28 V	193	60.3	-3.5
6	20085.00	46.4 AV	54.0	-7.6	3.28 V	193	49.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.7 PK			2.57 H	110	98.5	7.2
2	*6855.00	96.4 AV			2.57 H	110	89.2	7.2
3	#13710.00	51.7 PK	88.2	-36.5	3.48 H	212	36.5	15.2
4	#13710.00	38.7 AV	68.2	-29.5	3.48 H	212	23.5	15.2
5	20565.00	54.2 PK	74.0	-19.8	2.98 H	318	57.5	-3.3
6	20565.00	42.8 AV	54.0	-11.2	2.98 H	318	46.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			1.85 V	89	110.9	7.2
2	*6855.00	107.1 AV			1.85 V	89	99.9	7.2
3	#13710.00	53.4 PK	88.2	-34.8	3.79 V	312	38.2	15.2
4	#13710.00	40.9 AV	68.2	-27.3	3.79 V	312	25.7	15.2
5	20565.00	56.2 PK	74.0	-17.8	3.08 V	198	59.5	-3.3
6	20565.00	45.1 AV	54.0	-8.9	3.08 V	198	48.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	2.44 H	242	66.8	4.3
2	#5925.00	58.3 AV	68.2	-9.9	2.44 H	242	54.0	4.3
3	*5965.00	100.0 PK			2.44 H	242	95.6	4.4
4	*5965.00	89.6 AV			2.44 H	242	85.2	4.4
5	11930.00	48.3 PK	74.0	-25.7	3.35 H	204	36.2	12.1
6	11930.00	37.0 AV	54.0	-17.0	3.35 H	204	24.9	12.1
7	17895.00	53.0 PK	74.0	-21.0	3.15 H	307	30.7	22.3
8	17895.00	41.3 AV	54.0	-12.7	3.15 H	307	19.0	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.8 PK	88.2	-4.4	1.60 V	265	79.5	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.60 V	265	62.3	4.3
3	*5965.00	112.0 PK			1.60 V	265	107.6	4.4
4	*5965.00	101.7 AV			1.60 V	265	97.3	4.4
5	11930.00	50.3 PK	74.0	-23.7	3.86 V	335	38.2	12.1
6	11930.00	39.2 AV	54.0	-14.8	3.86 V	335	27.1	12.1
7	17895.00	55.3 PK	74.0	-18.7	3.09 V	174	33.0	22.3
8	17895.00	43.3 AV	54.0	-10.7	3.09 V	174	21.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	99.9 PK			2.45 H	236	95.0	4.9
2	*6205.00	89.5 AV			2.45 H	236	84.6	4.9
3	12410.00	49.8 PK	74.0	-24.2	3.48 H	198	37.5	12.3
4	12410.00	38.1 AV	54.0	-15.9	3.48 H	198	25.8	12.3
5	18615.00	54.7 PK	74.0	-19.3	2.98 H	293	59.6	-4.9
6	18615.00	43.7 AV	54.0	-10.3	2.98 H	293	48.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	113.7 PK			1.85 V	89	108.8	4.9
2	*6205.00	103.9 AV			1.85 V	89	99.0	4.9
3	12410.00	51.4 PK	74.0	-22.6	3.52 V	186	39.1	12.3
4	12410.00	39.8 AV	54.0	-14.2	3.52 V	186	27.5	12.3
5	18615.00	56.5 PK	74.0	-17.5	3.69 V	15	61.4	-4.9
6	18615.00	45.3 AV	54.0	-8.7	3.69 V	15	50.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	99.8 PK			2.39 H	248	93.4	6.4
2	*6405.00	89.4 AV			2.39 H	248	83.0	6.4
3	#12810.00	49.8 PK	88.2	-38.4	3.48 H	206	37.0	12.8
4	#12810.00	38.0 AV	68.2	-30.2	3.48 H	206	25.2	12.8
5	19215.00	53.5 PK	74.0	-20.5	2.81 H	293	57.2	-3.7
6	19215.00	43.3 AV	54.0	-10.7	2.81 H	293	47.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	117.2 PK			1.84 V	86	110.8	6.4
2	*6405.00	105.5 AV			1.84 V	86	99.1	6.4
3	#12810.00	51.3 PK	88.2	-36.9	3.93 V	335	38.5	12.8
4	#12810.00	40.0 AV	68.2	-28.2	3.93 V	335	27.2	12.8
5	19215.00	56.0 PK	74.0	-18.0	3.06 V	193	59.7	-3.7
6	19215.00	45.1 AV	54.0	-8.9	3.06 V	193	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	100.4 PK			2.47 H	244	93.5	6.9
2	*6565.00	89.8 AV			2.47 H	244	82.9	6.9
3	#13130.00	49.1 PK	88.2	-39.1	3.39 H	230	35.9	13.2
4	#13130.00	38.0 AV	68.2	-30.2	3.39 H	230	24.8	13.2
5	19695.00	53.9 PK	74.0	-20.1	2.84 H	320	57.8	-3.9
6	19695.00	42.5 AV	54.0	-11.5	2.84 H	320	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.0 PK			1.89 V	87	109.1	6.9
2	*6565.00	105.6 AV			1.89 V	87	98.7	6.9
3	#13130.00	50.7 PK	88.2	-37.5	3.84 V	329	37.5	13.2
4	#13130.00	39.7 AV	68.2	-28.5	3.84 V	329	26.5	13.2
5	19695.00	56.3 PK	74.0	-17.7	3.44 V	176	60.2	-3.9
6	19695.00	44.8 AV	54.0	-9.2	3.44 V	176	48.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	99.9 PK			2.48 H	230	92.7	7.2
2	*6685.00	89.7 AV			2.48 H	230	82.5	7.2
3	13370.00	47.1 PK	74.0	-26.9	3.31 H	198	33.1	14.0
4	13370.00	37.2 AV	54.0	-16.8	3.31 H	198	23.2	14.0
5	20055.00	52.8 PK	74.0	-21.2	3.09 H	294	56.3	-3.5
6	20055.00	42.8 AV	54.0	-11.2	3.09 H	294	46.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.6 PK			1.85 V	88	110.4	7.2
2	*6685.00	105.9 AV			1.85 V	88	98.7	7.2
3	13370.00	49.3 PK	74.0	-24.7	3.80 V	312	35.3	14.0
4	13370.00	39.5 AV	54.0	-14.5	3.80 V	312	25.5	14.0
5	20055.00	55.1 PK	74.0	-18.9	3.31 V	186	58.6	-3.5
6	20055.00	44.4 AV	54.0	-9.6	3.31 V	186	47.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	100.2 PK			2.42 H	244	93.1	7.1
2	*6845.00	89.9 AV			2.42 H	244	82.8	7.1
3	#13690.00	47.0 PK	88.2	-41.2	3.49 H	226	31.9	15.1
4	#13690.00	37.7 AV	68.2	-30.5	3.49 H	226	22.6	15.1
5	20535.00	53.6 PK	74.0	-20.4	3.09 H	317	56.8	-3.2
6	20535.00	42.2 AV	54.0	-11.8	3.09 H	317	45.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.5 PK			1.80 V	89	108.4	7.1
2	*6845.00	104.6 AV			1.80 V	89	97.5	7.1
3	#13690.00	49.2 PK	88.2	-39.0	3.71 V	344	34.1	15.1
4	#13690.00	39.2 AV	68.2	-29.0	3.71 V	344	24.1	15.1
5	20535.00	55.2 PK	74.0	-18.8	3.12 V	193	58.4	-3.2
6	20535.00	44.5 AV	54.0	-9.5	3.12 V	193	47.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.2 PK	88.2	-21.0	2.37 H	242	62.9	4.3
2	#5925.00	52.3 AV	68.2	-15.9	2.37 H	242	48.0	4.3
3	*5985.00	96.9 PK			2.37 H	242	92.5	4.4
4	*5985.00	85.0 AV			2.37 H	242	80.6	4.4
5	11970.00	45.4 PK	74.0	-28.6	3.53 H	224	33.2	12.2
6	11970.00	34.2 AV	54.0	-19.8	3.53 H	224	22.0	12.2
7	17955.00	53.7 PK	74.0	-20.3	3.06 H	315	30.3	23.4
8	17955.00	42.2 AV	54.0	-11.8	3.06 H	315	18.8	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	1.69 V	265	74.9	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.69 V	265	60.8	4.3
3	*5985.00	109.9 PK			1.69 V	265	105.5	4.4
4	*5985.00	98.8 AV			1.69 V	265	94.4	4.4
5	11970.00	47.2 PK	74.0	-26.8	3.72 V	341	35.0	12.2
6	11970.00	36.2 AV	54.0	-17.8	3.72 V	341	24.0	12.2
7	17955.00	55.2 PK	74.0	-18.8	3.43 V	198	31.8	23.4
8	17955.00	44.1 AV	54.0	-9.9	3.43 V	198	20.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	98.3 PK			2.36 H	249	93.3	5.0
2	*6225.00	87.6 AV			2.36 H	249	82.6	5.0
3	12450.00	47.6 PK	74.0	-26.4	3.59 H	217	35.3	12.3
4	12450.00	35.8 AV	54.0	-18.2	3.59 H	217	23.5	12.3
5	18675.00	53.1 PK	74.0	-20.9	2.81 H	315	58.0	-4.9
6	18675.00	41.5 AV	54.0	-12.5	2.81 H	315	46.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.2 PK			1.89 V	86	108.2	5.0
2	*6225.00	102.5 AV			1.89 V	86	97.5	5.0
3	12450.00	49.2 PK	74.0	-24.8	3.80 V	347	36.9	12.3
4	12450.00	37.5 AV	54.0	-16.5	3.80 V	347	25.2	12.3
5	18675.00	55.2 PK	74.0	-18.8	3.23 V	198	60.1	-4.9
6	18675.00	44.0 AV	54.0	-10.0	3.23 V	198	48.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	99.0 PK			2.40 H	258	92.8	6.2
2	*6385.00	87.2 AV			2.40 H	258	81.0	6.2
3	#12770.00	46.6 PK	88.2	-41.6	3.48 H	215	33.8	12.8
4	#12770.00	35.7 AV	68.2	-32.5	3.48 H	215	22.9	12.8
5	19155.00	53.8 PK	74.0	-20.2	3.09 H	284	57.6	-3.8
6	19155.00	42.7 AV	54.0	-11.3	3.09 H	284	46.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.6 PK			1.88 V	86	108.4	6.2
2	*6385.00	103.4 AV			1.88 V	86	97.2	6.2
3	#12770.00	48.9 PK	88.2	-39.3	3.80 V	326	36.1	12.8
4	#12770.00	38.1 AV	68.2	-30.1	3.80 V	326	25.3	12.8
5	19155.00	56.0 PK	74.0	-18.0	3.36 V	166	59.8	-3.8
6	19155.00	44.6 AV	54.0	-9.4	3.36 V	166	48.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	99.2 PK			2.42 H	236	92.3	6.9
2	*6625.00	87.1 AV			2.42 H	236	80.2	6.9
3	13250.00	46.6 PK	74.0	-27.4	3.45 H	195	33.0	13.6
4	13250.00	36.0 AV	54.0	-18.0	3.45 H	195	22.4	13.6
5	19875.00	53.4 PK	74.0	-20.6	3.04 H	284	56.9	-3.5
6	19875.00	41.9 AV	54.0	-12.1	3.04 H	284	45.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	115.6 PK			1.86 V	88	108.7	6.9
2	*6625.00	104.6 AV			1.86 V	88	97.7	6.9
3	13250.00	48.6 PK	74.0	-25.4	3.91 V	339	35.0	13.6
4	13250.00	38.0 AV	54.0	-16.0	3.91 V	339	24.4	13.6
5	19875.00	55.1 PK	74.0	-18.9	3.39 V	182	58.6	-3.5
6	19875.00	44.4 AV	54.0	-9.6	3.39 V	182	47.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	99.5 PK			2.37 H	237	92.3	7.2
2	*6705.00	87.4 AV			2.37 H	237	80.2	7.2
3	#13410.00	45.9 PK	88.2	-42.3	3.51 H	221	31.7	14.2
4	#13410.00	35.5 AV	68.2	-32.7	3.51 H	221	21.3	14.2
5	20115.00	52.4 PK	74.0	-21.6	3.02 H	312	55.9	-3.5
6	20115.00	41.8 AV	54.0	-12.2	3.02 H	312	45.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.7 PK			1.85 V	90	107.5	7.2
2	*6705.00	103.2 AV			1.85 V	90	96.0	7.2
3	#13410.00	47.8 PK	88.2	-40.4	3.78 V	317	33.6	14.2
4	#13410.00	37.1 AV	68.2	-31.1	3.78 V	317	22.9	14.2
5	20115.00	54.6 PK	74.0	-19.4	3.45 V	183	58.1	-3.5
6	20115.00	44.2 AV	54.0	-9.8	3.45 V	183	47.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	98.5 PK			2.36 H	232	91.5	7.0
2	*6785.00	86.8 AV			2.36 H	232	79.8	7.0
3	#13570.00	45.4 PK	88.2	-42.8	3.44 H	227	30.8	14.6
4	#13570.00	35.9 AV	68.2	-32.3	3.44 H	227	21.3	14.6
5	20355.00	52.7 PK	74.0	-21.3	3.13 H	312	55.8	-3.1
6	20355.00	42.1 AV	54.0	-11.9	3.13 H	312	45.2	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	114.7 PK			1.81 V	89	107.7	7.0
2	*6785.00	102.6 AV			1.81 V	89	95.6	7.0
3	#13570.00	47.6 PK	88.2	-40.6	3.97 V	327	33.0	14.6
4	#13570.00	37.7 AV	68.2	-30.5	3.97 V	327	23.1	14.6
5	20355.00	54.2 PK	74.0	-19.8	3.32 V	177	57.3	-3.1
6	20355.00	44.4 AV	54.0	-9.6	3.32 V	177	47.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.6 PK	88.2	-22.6	1.00 H	0	61.3	4.3
2	#5925.00	52.5 AV	68.2	-15.7	1.00 H	0	48.2	4.3
3	*6025.00	95.1 PK			2.54 H	255	90.9	4.2
4	*6025.00	83.4 AV			2.54 H	255	79.2	4.2
5	12050.00	45.5 PK	74.0	-28.5	3.54 H	207	33.1	12.4
6	12050.00	33.2 AV	54.0	-20.8	3.54 H	207	20.8	12.4
7	18075.00	53.2 PK	74.0	-20.8	2.84 H	295	57.9	-4.7
8	18075.00	42.2 AV	54.0	-11.8	2.84 H	295	46.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	1.79 V	268	73.7	4.3
2	#5925.00	65.3 AV	68.2	-2.9	1.79 V	268	61.0	4.3
3	*6025.00	109.1 PK			1.79 V	268	104.9	4.2
4	*6025.00	96.8 AV			1.79 V	268	92.6	4.2
5	12050.00	47.3 PK	74.0	-26.7	3.93 V	319	34.9	12.4
6	12050.00	35.2 AV	54.0	-18.8	3.93 V	319	22.8	12.4
7	18075.00	54.8 PK	74.0	-19.2	3.16 V	167	59.5	-4.7
8	18075.00	44.5 AV	54.0	-9.5	3.16 V	167	49.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	97.6 PK			2.54 H	255	92.8	4.8
2	*6185.00	86.3 AV			2.54 H	255	81.5	4.8
3	12370.00	46.2 PK	74.0	-27.8	3.35 H	198	33.9	12.3
4	12370.00	34.5 AV	54.0	-19.5	3.35 H	198	22.2	12.3
5	18555.00	53.2 PK	74.0	-20.8	2.96 H	311	58.1	-4.9
6	18555.00	42.8 AV	54.0	-11.2	2.96 H	311	47.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.1 PK			1.78 V	274	106.3	4.8
2	*6185.00	99.6 AV			1.78 V	274	94.8	4.8
3	12370.00	48.2 PK	74.0	-25.8	3.78 V	340	35.9	12.3
4	12370.00	36.4 AV	54.0	-17.6	3.78 V	340	24.1	12.3
5	18555.00	55.2 PK	74.0	-18.8	3.11 V	179	60.1	-4.9
6	18555.00	44.6 AV	54.0	-9.4	3.11 V	179	49.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.2 PK			2.52 H	263	91.1	6.1
2	*6345.00	86.0 AV			2.52 H	263	79.9	6.1
3	12690.00	45.8 PK	74.0	-28.2	3.48 H	215	32.9	12.9
4	12690.00	35.1 AV	54.0	-18.9	3.48 H	215	22.2	12.9
5	19035.00	52.8 PK	74.0	-21.2	3.06 H	318	56.7	-3.9
6	19035.00	42.0 AV	54.0	-12.0	3.06 H	318	45.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.2 PK			1.78 V	86	105.1	6.1
2	*6345.00	100.2 AV			1.78 V	86	94.1	6.1
3	12690.00	47.8 PK	74.0	-26.2	3.79 V	319	34.9	12.9
4	12690.00	37.5 AV	54.0	-16.5	3.79 V	319	24.6	12.9
5	19035.00	55.0 PK	74.0	-19.0	3.20 V	180	58.9	-3.9
6	19035.00	44.1 AV	54.0	-9.9	3.20 V	180	48.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.0 PK			2.56 H	247	88.8	7.2
2	*6665.00	86.5 AV			2.56 H	247	79.3	7.2
3	13330.00	45.3 PK	74.0	-28.7	3.47 H	226	31.5	13.8
4	13330.00	34.6 AV	54.0	-19.4	3.47 H	226	20.8	13.8
5	19995.00	51.9 PK	74.0	-22.1	3.10 H	288	55.5	-3.6
6	19995.00	41.7 AV	54.0	-12.3	3.10 H	288	45.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.5 PK			1.77 V	99	106.3	7.2
2	*6665.00	102.2 AV			1.77 V	99	95.0	7.2
3	13330.00	46.9 PK	74.0	-27.1	3.95 V	311	33.1	13.8
4	13330.00	36.1 AV	54.0	-17.9	3.95 V	311	22.3	13.8
5	19995.00	54.2 PK	74.0	-19.8	3.36 V	169	57.8	-3.6
6	19995.00	43.8 AV	54.0	-10.2	3.36 V	169	47.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.0 PK	88.2	-25.2	2.49 H	218	58.7	4.3
2	#5925.00	43.7 AV	68.2	-24.5	2.49 H	218	39.4	4.3
3	*5955.00	112.1 PK			2.49 H	218	107.6	4.5
4	*5955.00	102.2 AV			2.49 H	218	97.7	4.5
5	11910.00	53.2 PK	74.0	-20.8	3.50 H	224	41.0	12.2
6	11910.00	45.1 AV	54.0	-8.9	3.50 H	224	32.9	12.2
7	17865.00	57.0 PK	74.0	-17.0	3.09 H	300	35.1	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.09 H	300	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.9 PK	88.2	-8.3	1.73 V	88	75.6	4.3
2	#5925.00	56.1 AV	68.2	-12.1	1.73 V	88	51.8	4.3
3	*5955.00	122.9 PK			1.73 V	88	118.4	4.5
4	*5955.00	114.5 AV			1.73 V	88	110.0	4.5
5	11910.00	55.6 PK	74.0	-18.4	3.36 V	147	43.4	12.2
6	11910.00	46.7 AV	54.0	-7.3	3.36 V	147	34.5	12.2
7	17865.00	58.7 PK	74.0	-15.3	3.28 V	341	36.8	21.9
8	17865.00	46.4 AV	54.0	-7.6	3.28 V	341	24.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.7 PK			2.53 H	217	106.9	4.8
2	*6195.00	101.9 AV			2.53 H	217	97.1	4.8
3	12390.00	53.1 PK	74.0	-20.9	3.33 H	194	40.8	12.3
4	12390.00	45.5 AV	54.0	-8.5	3.33 H	194	33.2	12.3
5	18585.00	56.3 PK	74.0	-17.7	3.09 H	284	61.3	-5.0
6	18585.00	44.7 AV	54.0	-9.3	3.09 H	284	49.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.0 PK			1.70 V	78	118.2	4.8
2	*6195.00	114.3 AV			1.70 V	78	109.5	4.8
3	12390.00	55.3 PK	74.0	-18.7	3.90 V	347	43.0	12.3
4	12390.00	47.5 AV	54.0	-6.5	3.90 V	347	35.2	12.3
5	18585.00	58.3 PK	74.0	-15.7	3.15 V	179	63.3	-5.0
6	18585.00	46.7 AV	54.0	-7.3	3.15 V	179	51.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.5 PK			2.54 H	217	106.1	6.4
2	*6415.00	102.4 AV			2.54 H	217	96.0	6.4
3	#12830.00	54.1 PK	88.2	-34.1	3.42 H	214	41.1	13.0
4	#12830.00	44.1 AV	68.2	-24.1	3.42 H	214	31.1	13.0
5	19245.00	55.8 PK	74.0	-18.2	3.13 H	312	59.6	-3.8
6	19245.00	44.3 AV	54.0	-9.7	3.13 H	312	48.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.4 PK			1.79 V	99	116.0	6.4
2	*6415.00	114.0 AV			1.79 V	99	107.6	6.4
3	#12830.00	55.7 PK	88.2	-32.5	3.76 V	329	42.7	13.0
4	#12830.00	46.6 AV	68.2	-21.6	3.76 V	329	33.6	13.0
5	19245.00	57.7 PK	74.0	-16.3	3.39 V	172	61.5	-3.8
6	19245.00	46.3 AV	54.0	-7.7	3.39 V	172	50.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.6 PK			2.45 H	211	105.7	6.9
2	*6535.00	102.6 AV			2.45 H	211	95.7	6.9
3	#13070.00	53.4 PK	88.2	-34.8	3.50 H	190	40.2	13.2
4	#13070.00	45.2 AV	68.2	-23.0	3.50 H	190	32.0	13.2
5	19605.00	55.5 PK	74.0	-18.5	3.08 H	297	59.5	-4.0
6	19605.00	44.4 AV	54.0	-9.6	3.08 H	297	48.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.6 PK			1.75 V	89	116.7	6.9
2	*6535.00	115.0 AV			1.75 V	89	108.1	6.9
3	#13070.00	55.3 PK	88.2	-32.9	3.72 V	332	42.1	13.2
4	#13070.00	46.7 AV	68.2	-21.5	3.72 V	332	33.5	13.2
5	19605.00	57.9 PK	74.0	-16.1	3.19 V	175	61.9	-4.0
6	19605.00	46.4 AV	54.0	-7.6	3.19 V	175	50.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.5 PK			2.54 H	222	104.3	7.2
2	*6695.00	101.7 AV			2.54 H	222	94.5	7.2
3	13390.00	51.8 PK	74.0	-22.2	3.45 H	208	37.8	14.0
4	13390.00	44.2 AV	54.0	-9.8	3.45 H	208	30.2	14.0
5	20085.00	54.8 PK	74.0	-19.2	2.97 H	320	58.3	-3.5
6	20085.00	43.5 AV	54.0	-10.5	2.97 H	320	47.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.0 PK			1.69 V	92	115.8	7.2
2	*6695.00	114.5 AV			1.69 V	92	107.3	7.2
3	13390.00	54.2 PK	74.0	-19.8	3.81 V	337	40.2	14.0
4	13390.00	46.3 AV	54.0	-7.7	3.81 V	337	32.3	14.0
5	20085.00	56.7 PK	74.0	-17.3	3.26 V	167	60.2	-3.5
6	20085.00	45.8 AV	54.0	-8.2	3.26 V	167	49.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.6 PK			2.54 H	206	103.4	7.2
2	*6855.00	100.0 AV			2.54 H	206	92.8	7.2
3	#13710.00	52.6 PK	88.2	-35.6	3.31 H	210	37.4	15.2
4	#13710.00	43.7 AV	68.2	-24.5	3.31 H	210	28.5	15.2
5	20565.00	54.6 PK	74.0	-19.4	2.91 H	304	57.9	-3.3
6	20565.00	44.0 AV	54.0	-10.0	2.91 H	304	47.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.4 PK			1.75 V	100	115.2	7.2
2	*6855.00	114.1 AV			1.75 V	100	106.9	7.2
3	#13710.00	54.2 PK	88.2	-34.0	3.74 V	346	39.0	15.2
4	#13710.00	45.4 AV	68.2	-22.8	3.74 V	346	30.2	15.2
5	20565.00	56.2 PK	74.0	-17.8	3.37 V	193	59.5	-3.3
6	20565.00	45.9 AV	54.0	-8.1	3.37 V	193	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	2.48 H	241	58.9	4.3
2	#5925.00	45.8 AV	68.2	-22.4	2.48 H	241	41.5	4.3
3	*5955.00	109.7 PK			2.48 H	241	105.2	4.5
4	*5955.00	100.8 AV			2.48 H	241	96.3	4.5
5	11910.00	52.6 PK	74.0	-21.4	3.42 H	205	40.4	12.2
6	11910.00	44.2 AV	54.0	-9.8	3.42 H	205	32.0	12.2
7	17865.00	54.7 PK	74.0	-19.3	2.80 H	299	32.8	21.9
8	17865.00	44.0 AV	54.0	-10.0	2.80 H	299	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.9 PK	88.2	-8.3	1.00 V	0	75.6	4.3
2	#5925.00	60.8 AV	68.2	-7.4	1.00 V	0	56.5	4.3
3	*5955.00	121.7 PK			1.70 V	85	117.2	4.5
4	*5955.00	112.0 AV			1.70 V	85	107.5	4.5
5	11910.00	54.6 PK	74.0	-19.4	3.78 V	332	42.4	12.2
6	11910.00	46.5 AV	54.0	-7.5	3.78 V	332	34.3	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.10 V	196	35.3	21.9
8	17865.00	45.6 AV	54.0	-8.4	3.10 V	196	23.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	109.9 PK			2.47 H	249	105.1	4.8
2	*6195.00	100.8 AV			2.47 H	249	96.0	4.8
3	12390.00	53.1 PK	74.0	-20.9	3.31 H	192	40.8	12.3
4	12390.00	43.8 AV	54.0	-10.2	3.31 H	192	31.5	12.3
5	18585.00	55.4 PK	74.0	-18.6	2.98 H	284	60.4	-5.0
6	18585.00	43.4 AV	54.0	-10.6	2.98 H	284	48.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.9 PK			1.70 V	84	117.1	4.8
2	*6195.00	112.2 AV			1.70 V	84	107.4	4.8
3	12390.00	54.9 PK	74.0	-19.1	3.74 V	330	42.6	12.3
4	12390.00	46.0 AV	54.0	-8.0	3.74 V	330	33.7	12.3
5	18585.00	57.6 PK	74.0	-16.4	3.40 V	175	62.6	-5.0
6	18585.00	45.9 AV	54.0	-8.1	3.40 V	175	50.9	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.4 PK			2.47 H	230	103.0	6.4
2	*6415.00	100.6 AV			2.47 H	230	94.2	6.4
3	#12830.00	52.6 PK	88.2	-35.6	3.49 H	217	39.6	13.0
4	#12830.00	43.8 AV	68.2	-24.4	3.49 H	217	30.8	13.0
5	19245.00	54.7 PK	74.0	-19.3	2.95 H	313	58.5	-3.8
6	19245.00	43.4 AV	54.0	-10.6	2.95 H	313	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.9 PK			1.69 V	72	115.5	6.4
2	*6415.00	112.2 AV			1.69 V	72	105.8	6.4
3	#12830.00	54.4 PK	88.2	-33.8	3.94 V	348	41.4	13.0
4	#12830.00	45.6 AV	68.2	-22.6	3.94 V	348	32.6	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.10 V	191	60.4	-3.8
6	19245.00	45.8 AV	54.0	-8.2	3.10 V	191	49.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.3 PK			2.46 H	231	102.4	6.9
2	*6535.00	100.5 AV			2.46 H	231	93.6	6.9
3	#13070.00	52.2 PK	88.2	-36.0	3.44 H	224	39.0	13.2
4	#13070.00	43.5 AV	68.2	-24.7	3.44 H	224	30.3	13.2
5	19605.00	55.4 PK	74.0	-18.6	2.81 H	290	59.4	-4.0
6	19605.00	44.1 AV	54.0	-9.9	2.81 H	290	48.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			1.66 V	86	114.7	6.9
2	*6535.00	112.0 AV			1.66 V	86	105.1	6.9
3	#13070.00	54.5 PK	88.2	-33.7	3.97 V	341	41.3	13.2
4	#13070.00	46.0 AV	68.2	-22.2	3.97 V	341	32.8	13.2
5	19605.00	57.5 PK	74.0	-16.5	3.07 V	163	61.5	-4.0
6	19605.00	46.0 AV	54.0	-8.0	3.07 V	163	50.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.6 PK			2.42 H	243	101.4	7.2
2	*6695.00	99.8 AV			2.42 H	243	92.6	7.2
3	13390.00	51.7 PK	74.0	-22.3	3.35 H	209	37.7	14.0
4	13390.00	43.9 AV	54.0	-10.1	3.35 H	209	29.9	14.0
5	20085.00	56.0 PK	74.0	-18.0	2.86 H	287	59.5	-3.5
6	20085.00	44.6 AV	54.0	-9.4	2.86 H	287	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.0 PK			1.68 V	99	113.8	7.2
2	*6695.00	111.5 AV			1.68 V	99	104.3	7.2
3	13390.00	54.1 PK	74.0	-19.9	3.91 V	329	40.1	14.0
4	13390.00	45.9 AV	54.0	-8.1	3.91 V	329	31.9	14.0
5	20085.00	56.6 PK	74.0	-17.4	3.28 V	186	60.1	-3.5
6	20085.00	45.0 AV	54.0	-9.0	3.28 V	186	48.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.2 PK			2.53 H	242	101.0	7.2
2	*6855.00	99.3 AV			2.53 H	242	92.1	7.2
3	#13710.00	51.6 PK	88.2	-36.6	3.43 H	211	36.4	15.2
4	#13710.00	42.4 AV	68.2	-25.8	3.43 H	211	27.2	15.2
5	20565.00	56.4 PK	74.0	-17.6	3.00 H	284	59.7	-3.3
6	20565.00	44.1 AV	54.0	-9.9	3.00 H	284	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.6 PK			1.67 V	93	113.4	7.2
2	*6855.00	111.2 AV			1.67 V	93	104.0	7.2
3	#13710.00	53.3 PK	88.2	-34.9	3.84 V	319	38.1	15.2
4	#13710.00	44.7 AV	68.2	-23.5	3.84 V	319	29.5	15.2
5	20565.00	56.2 PK	74.0	-17.8	3.24 V	190	59.5	-3.3
6	20565.00	44.2 AV	54.0	-9.8	3.24 V	190	47.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.3 PK	88.2	-25.9	2.49 H	241	58.0	4.3
2	#5925.00	44.2 AV	68.2	-24.0	2.49 H	241	39.9	4.3
3	*5955.00	108.3 PK			2.49 H	241	103.8	4.5
4	*5955.00	97.6 AV			2.49 H	241	93.1	4.5
5	11910.00	51.3 PK	74.0	-22.7	3.31 H	226	39.1	12.2
6	11910.00	41.9 AV	54.0	-12.1	3.31 H	226	29.7	12.2
7	17865.00	55.7 PK	74.0	-18.3	3.06 H	292	33.8	21.9
8	17865.00	44.0 AV	54.0	-10.0	3.06 H	292	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.4 PK	88.2	-11.8	1.70 V	75	72.1	4.3
2	#5925.00	58.5 AV	68.2	-9.7	1.70 V	75	54.2	4.3
3	*5955.00	119.9 PK			1.70 V	75	115.4	4.5
4	*5955.00	109.6 AV			1.70 V	75	105.1	4.5
5	11910.00	53.2 PK	74.0	-20.8	3.74 V	331	41.0	12.2
6	11910.00	43.5 AV	54.0	-10.5	3.74 V	331	31.3	12.2
7	17865.00	57.6 PK	74.0	-16.4	3.28 V	186	35.7	21.9
8	17865.00	45.8 AV	54.0	-8.2	3.28 V	186	23.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.3 PK			2.54 H	229	103.5	4.8
2	*6195.00	97.6 AV			2.54 H	229	92.8	4.8
3	12390.00	51.0 PK	74.0	-23.0	3.55 H	194	38.7	12.3
4	12390.00	43.8 AV	54.0	-10.2	3.55 H	194	31.5	12.3
5	18585.00	56.4 PK	74.0	-17.6	2.98 H	292	61.4	-5.0
6	18585.00	44.1 AV	54.0	-9.9	2.98 H	292	49.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.7 PK			1.68 V	87	114.9	4.8
2	*6195.00	109.1 AV			1.68 V	87	104.3	4.8
3	12390.00	53.3 PK	74.0	-20.7	3.89 V	315	41.0	12.3
4	12390.00	45.4 AV	54.0	-8.6	3.89 V	315	33.1	12.3
5	18585.00	56.2 PK	74.0	-17.8	3.30 V	187	61.2	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.30 V	187	49.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.1 PK			2.46 H	230	101.7	6.4
2	*6415.00	97.5 AV			2.46 H	230	91.1	6.4
3	#12830.00	51.7 PK	88.2	-36.5	3.53 H	212	38.7	13.0
4	#12830.00	43.9 AV	68.2	-24.3	3.53 H	212	30.9	13.0
5	19245.00	55.8 PK	74.0	-18.2	2.80 H	311	59.6	-3.8
6	19245.00	44.4 AV	54.0	-9.6	2.80 H	311	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.1 PK			1.66 V	71	113.7	6.4
2	*6415.00	109.6 AV			1.66 V	71	103.2	6.4
3	#12830.00	53.4 PK	88.2	-34.8	3.87 V	316	40.4	13.0
4	#12830.00	45.5 AV	68.2	-22.7	3.87 V	316	32.5	13.0
5	19245.00	56.0 PK	74.0	-18.0	3.41 V	185	59.8	-3.8
6	19245.00	44.3 AV	54.0	-9.7	3.41 V	185	48.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.8 PK			2.47 H	228	100.9	6.9
2	*6535.00	97.2 AV			2.47 H	228	90.3	6.9
3	#13070.00	51.2 PK	88.2	-37.0	3.41 H	213	38.0	13.2
4	#13070.00	43.9 AV	68.2	-24.3	3.41 H	213	30.7	13.2
5	19605.00	56.3 PK	74.0	-17.7	2.80 H	314	60.3	-4.0
6	19605.00	44.1 AV	54.0	-9.9	2.80 H	314	48.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.2 PK			1.76 V	65	112.3	6.9
2	*6535.00	109.2 AV			1.76 V	65	102.3	6.9
3	#13070.00	53.5 PK	88.2	-34.7	3.85 V	321	40.3	13.2
4	#13070.00	45.8 AV	68.2	-22.4	3.85 V	321	32.6	13.2
5	19605.00	56.2 PK	74.0	-17.8	3.15 V	199	60.2	-4.0
6	19605.00	44.8 AV	54.0	-9.2	3.15 V	199	48.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.3 PK			2.50 H	247	100.1	7.2
2	*6695.00	96.5 AV			2.50 H	247	89.3	7.2
3	13390.00	51.9 PK	74.0	-22.1	3.53 H	214	37.9	14.0
4	13390.00	43.0 AV	54.0	-11.0	3.53 H	214	29.0	14.0
5	20085.00	56.0 PK	74.0	-18.0	3.02 H	314	59.5	-3.5
6	20085.00	45.0 AV	54.0	-9.0	3.02 H	314	48.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.7 PK			1.66 V	82	111.5	7.2
2	*6695.00	108.6 AV			1.66 V	82	101.4	7.2
3	13390.00	53.8 PK	74.0	-20.2	3.71 V	314	39.8	14.0
4	13390.00	45.4 AV	54.0	-8.6	3.71 V	314	31.4	14.0
5	20085.00	56.5 PK	74.0	-17.5	3.41 V	172	60.0	-3.5
6	20085.00	44.2 AV	54.0	-9.8	3.41 V	172	47.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.8 PK			2.47 H	228	99.6	7.2
2	*6855.00	95.8 AV			2.47 H	228	88.6	7.2
3	#13710.00	50.5 PK	88.2	-37.7	3.42 H	201	35.3	15.2
4	#13710.00	42.1 AV	68.2	-26.1	3.42 H	201	26.9	15.2
5	20565.00	56.1 PK	74.0	-17.9	3.12 H	283	59.4	-3.3
6	20565.00	45.0 AV	54.0	-9.0	3.12 H	283	48.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.68 V	63	110.6	7.2
2	*6855.00	107.9 AV			1.68 V	63	100.7	7.2
3	#13710.00	52.8 PK	88.2	-35.4	3.78 V	324	37.6	15.2
4	#13710.00	44.3 AV	68.2	-23.9	3.78 V	324	29.1	15.2
5	20565.00	54.8 PK	74.0	-19.2	3.08 V	167	58.1	-3.3
6	20565.00	43.8 AV	54.0	-10.2	3.08 V	167	47.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.5 PK	88.2	-24.7	2.47 H	218	59.2	4.3
2	#5925.00	41.7 AV	68.2	-26.5	2.47 H	218	37.4	4.3
3	*5955.00	109.0 PK			2.47 H	218	104.5	4.5
4	*5955.00	99.6 AV			2.47 H	218	95.1	4.5
5	11910.00	50.1 PK	74.0	-23.9	3.31 H	222	37.9	12.2
6	11910.00	38.9 AV	54.0	-15.1	3.31 H	222	26.7	12.2
7	17865.00	56.0 PK	74.0	-18.0	3.13 H	313	34.1	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.13 H	313	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	1.70 V	85	73.9	4.3
2	#5925.00	51.9 AV	68.2	-16.3	1.70 V	85	47.6	4.3
3	*5955.00	120.9 PK			1.70 V	85	116.4	4.5
4	*5955.00	111.0 AV			1.70 V	85	106.5	4.5
5	11910.00	51.9 PK	74.0	-22.1	3.86 V	315	39.7	12.2
6	11910.00	40.5 AV	54.0	-13.5	3.86 V	315	28.3	12.2
7	17865.00	56.0 PK	74.0	-18.0	3.10 V	166	34.1	21.9
8	17865.00	44.1 AV	54.0	-9.9	3.10 V	166	22.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.4 PK			2.47 H	230	101.2	7.2
2	*6695.00	99.1 AV			2.47 H	230	91.9	7.2
3	13390.00	49.9 PK	74.0	-24.1	3.32 H	238	35.9	14.0
4	13390.00	39.0 AV	54.0	-15.0	3.32 H	238	25.0	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.09 H	322	58.8	-3.5
6	20085.00	44.4 AV	54.0	-9.6	3.09 H	322	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.0 PK			1.73 V	78	113.8	7.2
2	*6695.00	110.9 AV			1.73 V	78	103.7	7.2
3	13390.00	51.8 PK	74.0	-22.2	3.84 V	331	37.8	14.0
4	13390.00	40.6 AV	54.0	-13.4	3.84 V	331	26.6	14.0
5	20085.00	55.9 PK	74.0	-18.1	3.08 V	168	59.4	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.08 V	168	47.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	2.47 H	218	52.6	4.3
2	#5925.00	42.8 AV	68.2	-25.4	2.47 H	218	38.5	4.3
3	*5955.00	106.7 PK			2.47 H	218	102.2	4.5
4	*5955.00	96.6 AV			2.47 H	218	92.1	4.5
5	11910.00	48.5 PK	74.0	-25.5	3.38 H	216	36.3	12.2
6	11910.00	38.0 AV	54.0	-16.0	3.38 H	216	25.8	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.07 H	306	34.4	21.9
8	17865.00	44.4 AV	54.0	-9.6	3.07 H	306	22.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.4 PK	88.2	-17.8	1.69 V	86	66.1	4.3
2	#5925.00	56.3 AV	68.2	-11.9	1.69 V	86	52.0	4.3
3	*5955.00	118.8 PK			1.69 V	86	114.3	4.5
4	*5955.00	108.6 AV			1.69 V	86	104.1	4.5
5	11910.00	50.2 PK	74.0	-23.8	3.87 V	348	38.0	12.2
6	11910.00	39.8 AV	54.0	-14.2	3.87 V	348	27.6	12.2
7	17865.00	55.8 PK	74.0	-18.2	3.15 V	194	33.9	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.15 V	194	22.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.8 PK			2.42 H	227	99.6	7.2
2	*6695.00	97.0 AV			2.42 H	227	89.8	7.2
3	13390.00	48.1 PK	74.0	-25.9	3.33 H	225	34.1	14.0
4	13390.00	37.8 AV	54.0	-16.2	3.33 H	225	23.8	14.0
5	20085.00	56.4 PK	74.0	-17.6	3.03 H	321	59.9	-3.5
6	20085.00	44.3 AV	54.0	-9.7	3.03 H	321	47.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.5 PK			1.74 V	71	111.3	7.2
2	*6695.00	108.1 AV			1.74 V	71	100.9	7.2
3	13390.00	50.7 PK	74.0	-23.3	3.87 V	345	36.7	14.0
4	13390.00	40.3 AV	54.0	-13.7	3.87 V	345	26.3	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.10 V	186	58.8	-3.5
6	20085.00	44.3 AV	54.0	-9.7	3.10 V	186	47.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.6 PK	88.2	-21.6	2.37 H	239	62.3	4.3
2	#5925.00	53.8 AV	68.2	-14.4	2.37 H	239	49.5	4.3
3	*5985.00	99.8 PK			2.37 H	239	95.4	4.4
4	*5985.00	87.3 AV			2.37 H	239	82.9	4.4
5	11970.00	43.8 PK	74.0	-30.2	3.57 H	205	31.6	12.2
6	11970.00	33.1 AV	54.0	-20.9	3.57 H	205	20.9	12.2
7	17955.00	56.4 PK	74.0	-17.6	3.09 H	320	33.0	23.4
8	17955.00	44.3 AV	54.0	-9.7	3.09 H	320	20.9	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.2 PK	88.2	-8.0	1.75 V	76	75.9	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.75 V	76	62.3	4.3
3	*5985.00	109.7 PK			1.75 V	76	105.3	4.4
4	*5985.00	98.7 AV			1.75 V	76	94.3	4.4
5	11970.00	45.6 PK	74.0	-28.4	3.72 V	323	33.4	12.2
6	11970.00	34.9 AV	54.0	-19.1	3.72 V	323	22.7	12.2
7	17955.00	55.8 PK	74.0	-18.2	3.29 V	163	32.4	23.4
8	17955.00	44.2 AV	54.0	-9.8	3.29 V	163	20.8	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	99.4 PK			2.41 H	227	92.2	7.2
2	*6705.00	87.0 AV			2.41 H	227	79.8	7.2
3	#13410.00	44.1 PK	88.2	-44.1	3.56 H	192	29.9	14.2
4	#13410.00	33.5 AV	68.2	-34.7	3.56 H	192	19.3	14.2
5	20115.00	56.1 PK	74.0	-17.9	3.14 H	315	59.6	-3.5
6	20115.00	43.9 AV	54.0	-10.1	3.14 H	315	47.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.3 PK			1.73 V	84	102.1	7.2
2	*6705.00	98.5 AV			1.73 V	84	91.3	7.2
3	#13410.00	45.2 PK	88.2	-43.0	3.71 V	337	31.0	14.2
4	#13410.00	34.5 AV	68.2	-33.7	3.71 V	337	20.3	14.2
5	20115.00	56.2 PK	74.0	-17.8	3.28 V	175	59.7	-3.5
6	20115.00	44.6 AV	54.0	-9.4	3.28 V	175	48.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.4 PK	88.2	-22.8	2.51 H	245	61.1	4.3
2	#5925.00	55.7 AV	68.2	-12.5	2.51 H	245	51.4	4.3
3	*6025.00	96.1 PK			2.51 H	245	91.9	4.2
4	*6025.00	86.0 AV			2.51 H	245	81.8	4.2
5	12050.00	43.6 PK	74.0	-30.4	3.47 H	207	31.2	12.4
6	12050.00	32.9 AV	54.0	-21.1	3.47 H	207	20.5	12.4
7	18075.00	56.0 PK	74.0	-18.0	3.12 H	315	60.7	-4.7
8	18075.00	44.0 AV	54.0	-10.0	3.12 H	315	48.7	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.0 PK	88.2	-8.2	1.78 V	88	75.7	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.78 V	88	62.2	4.3
3	*6025.00	108.8 PK			1.78 V	88	104.6	4.2
4	*6025.00	95.7 AV			1.78 V	88	91.5	4.2
5	12050.00	45.7 PK	74.0	-28.3	3.80 V	322	33.3	12.4
6	12050.00	34.6 AV	54.0	-19.4	3.80 V	322	22.2	12.4
7	18075.00	55.8 PK	74.0	-18.2	3.40 V	173	60.5	-4.7
8	18075.00	44.2 AV	54.0	-9.8	3.40 V	173	48.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.6 PK			2.51 H	253	89.4	7.2
2	*6665.00	86.2 AV			2.51 H	253	79.0	7.2
3	13330.00	43.6 PK	74.0	-30.4	3.46 H	195	29.8	13.8
4	13330.00	33.1 AV	54.0	-20.9	3.46 H	195	19.3	13.8
5	19995.00	56.5 PK	74.0	-17.5	3.09 H	328	60.1	-3.6
6	19995.00	44.3 AV	54.0	-9.7	3.09 H	328	47.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	109.4 PK			1.79 V	87	102.2	7.2
2	*6665.00	96.0 AV			1.79 V	87	88.8	7.2
3	13330.00	45.4 PK	74.0	-28.6	3.79 V	325	31.6	13.8
4	13330.00	34.3 AV	54.0	-19.7	3.79 V	325	20.5	13.8
5	19995.00	55.5 PK	74.0	-18.5	3.45 V	166	59.1	-3.6
6	19995.00	44.1 AV	54.0	-9.9	3.45 V	166	47.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.0 PK	88.2	-19.2	2.50 H	242	64.7	4.3
2	#5925.00	55.7 AV	68.2	-12.5	2.50 H	242	51.4	4.3
3	*6025.00	97.2 PK			2.50 H	242	93.0	4.2
4	*6025.00	86.0 AV			2.50 H	242	81.8	4.2
5	12050.00	43.9 PK	74.0	-30.1	3.31 H	223	31.5	12.4
6	12050.00	33.2 AV	54.0	-20.8	3.31 H	223	20.8	12.4
7	18075.00	56.6 PK	74.0	-17.4	2.96 H	315	61.3	-4.7
8	18075.00	44.2 AV	54.0	-9.8	2.96 H	315	48.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.0 PK	88.2	-9.2	1.79 V	76	74.7	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.79 V	76	60.8	4.3
3	*6025.00	106.8 PK			1.79 V	76	102.6	4.2
4	*6025.00	95.3 AV			1.79 V	76	91.1	4.2
5	12050.00	45.5 PK	74.0	-28.5	3.79 V	331	33.1	12.4
6	12050.00	34.8 AV	54.0	-19.2	3.79 V	331	22.4	12.4
7	18075.00	56.1 PK	74.0	-17.9	3.36 V	188	60.8	-4.7
8	18075.00	44.1 AV	54.0	-9.9	3.36 V	188	48.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	97.8 PK			2.49 H	250	90.6	7.2
2	*6665.00	86.3 AV			2.49 H	250	79.1	7.2
3	13330.00	43.7 PK	74.0	-30.3	3.33 H	237	29.9	13.8
4	13330.00	33.1 AV	54.0	-20.9	3.33 H	237	19.3	13.8
5	19995.00	56.9 PK	74.0	-17.1	3.00 H	313	60.5	-3.6
6	19995.00	44.5 AV	54.0	-9.5	3.00 H	313	48.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.1 PK			1.83 V	92	99.9	7.2
2	*6665.00	95.5 AV			1.83 V	92	88.3	7.2
3	13330.00	45.8 PK	74.0	-28.2	3.80 V	326	32.0	13.8
4	13330.00	35.1 AV	54.0	-18.9	3.80 V	326	21.3	13.8
5	19995.00	56.2 PK	74.0	-17.8	3.37 V	201	59.8	-3.6
6	19995.00	44.2 AV	54.0	-9.8	3.37 V	201	47.8	-3.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


2Tx

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

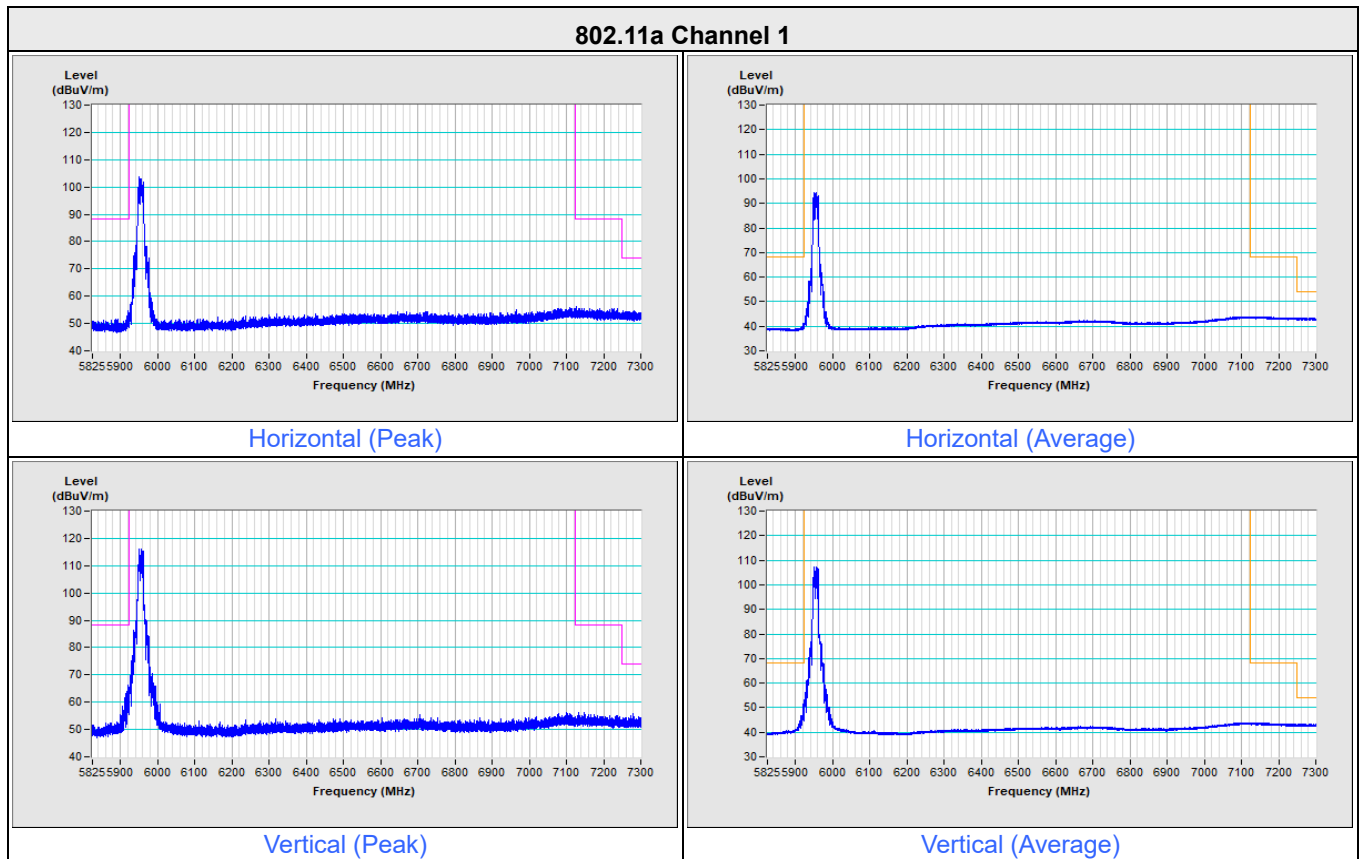


2Tx NSS2

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

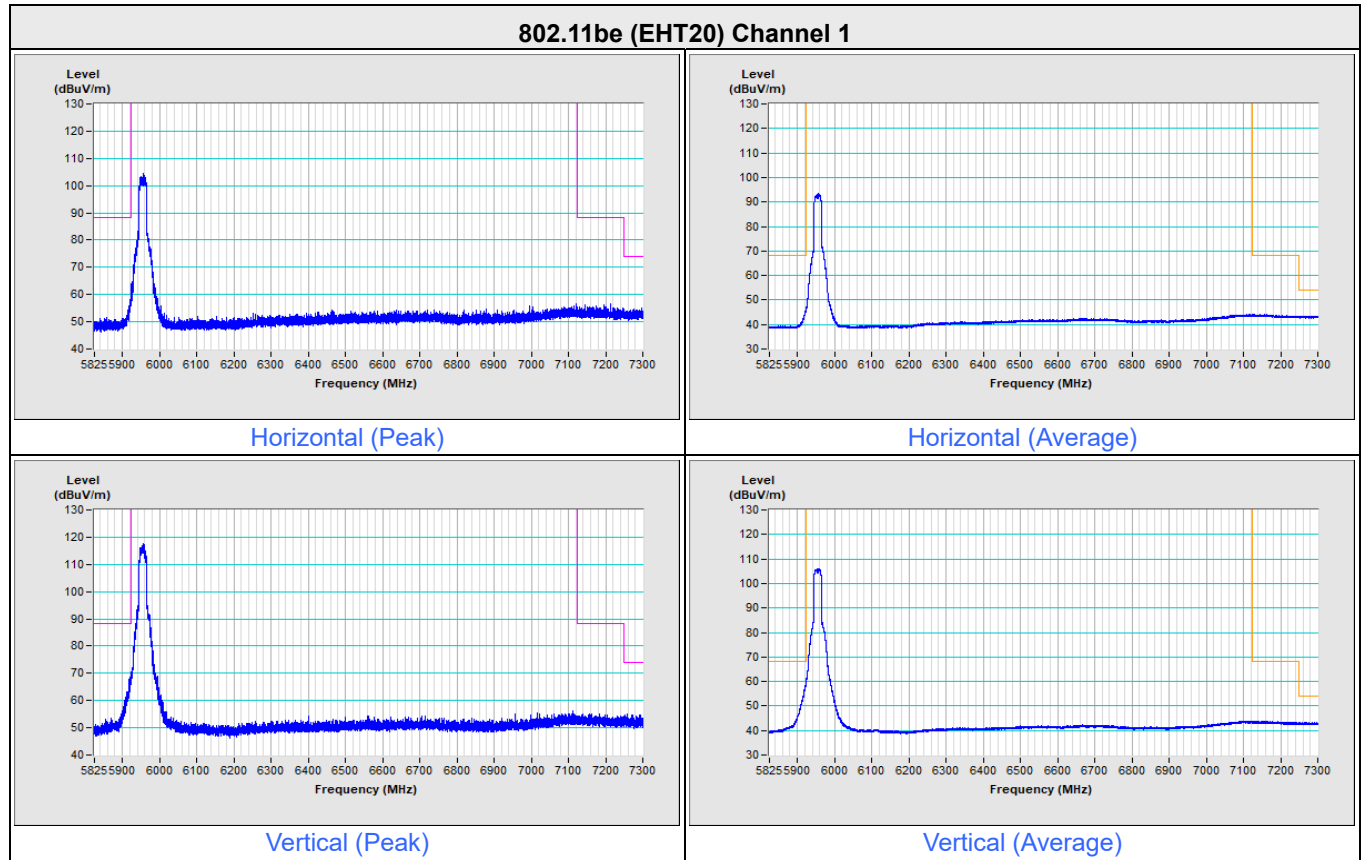


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 3

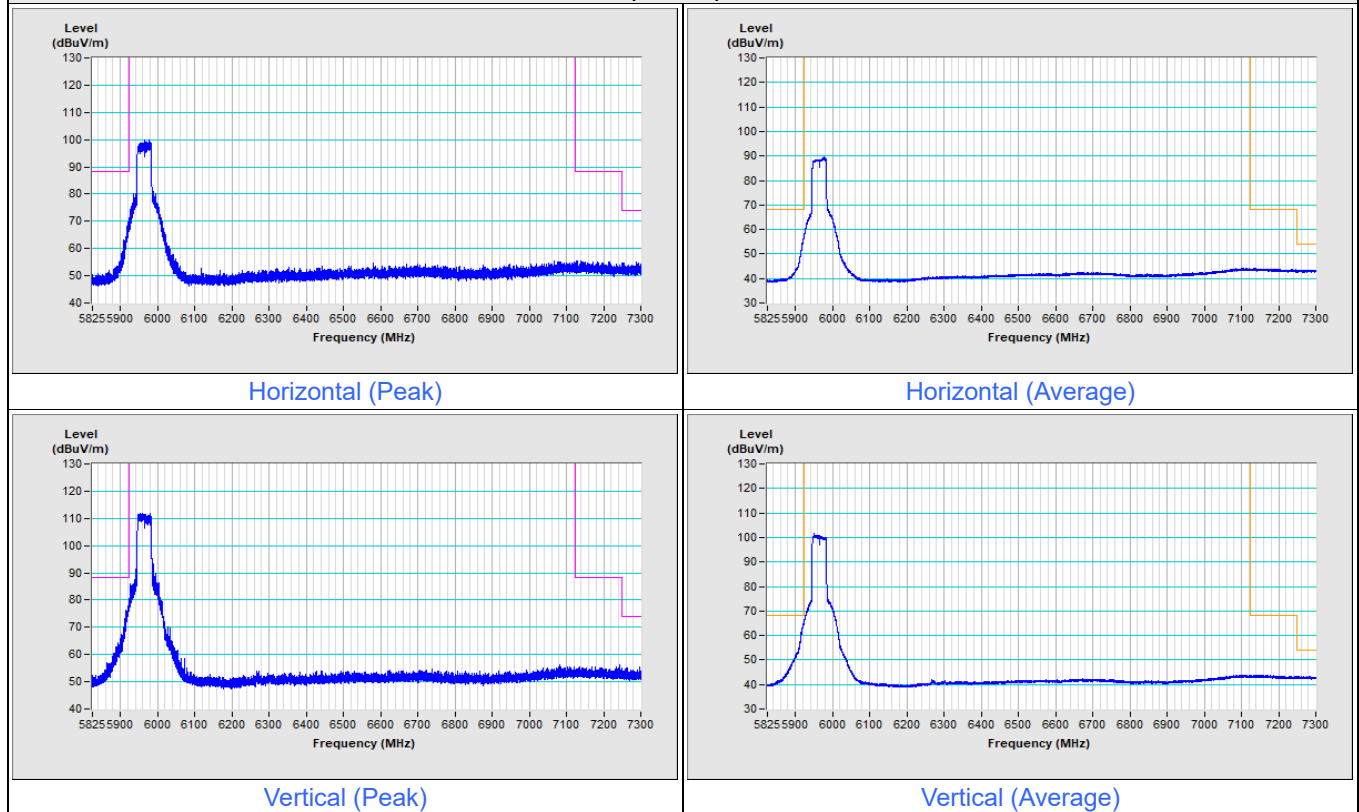


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) Channel 7

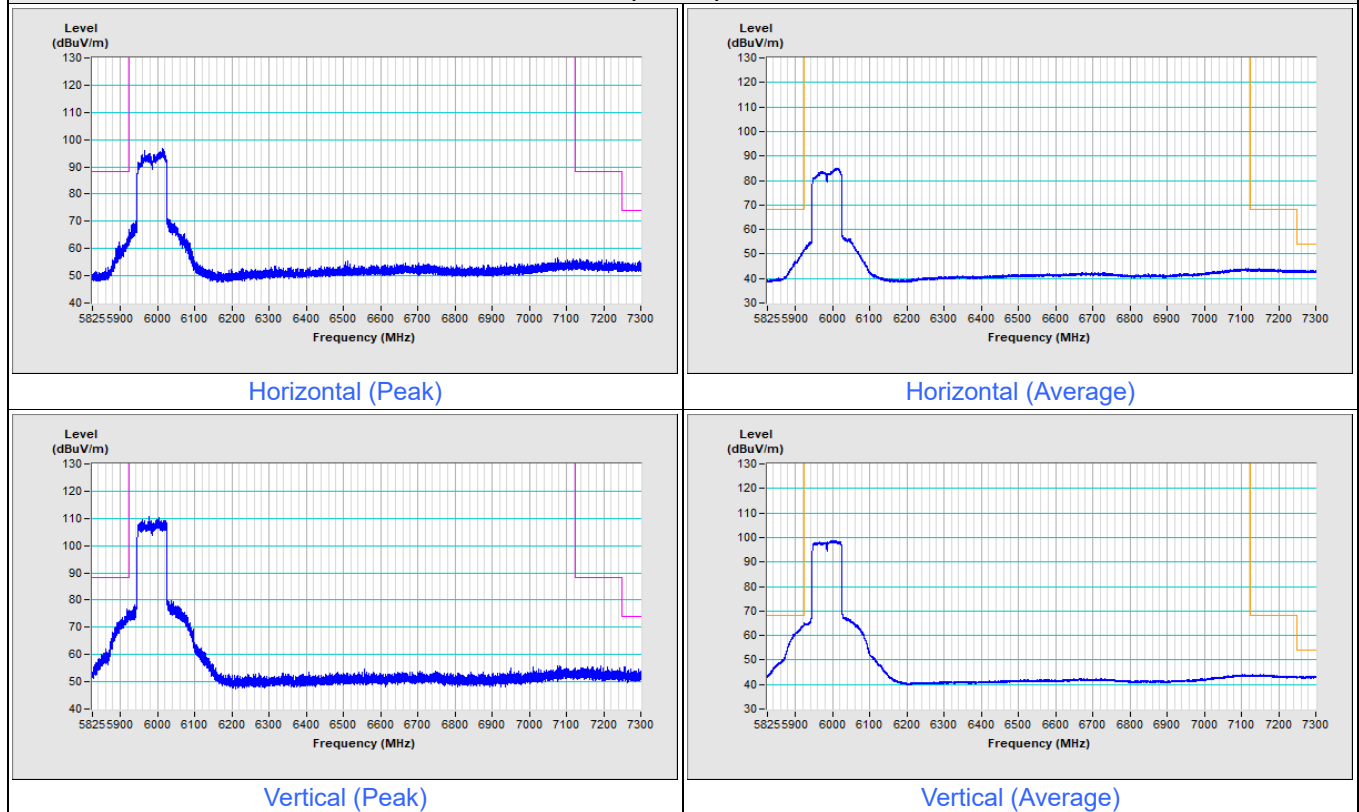


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 15

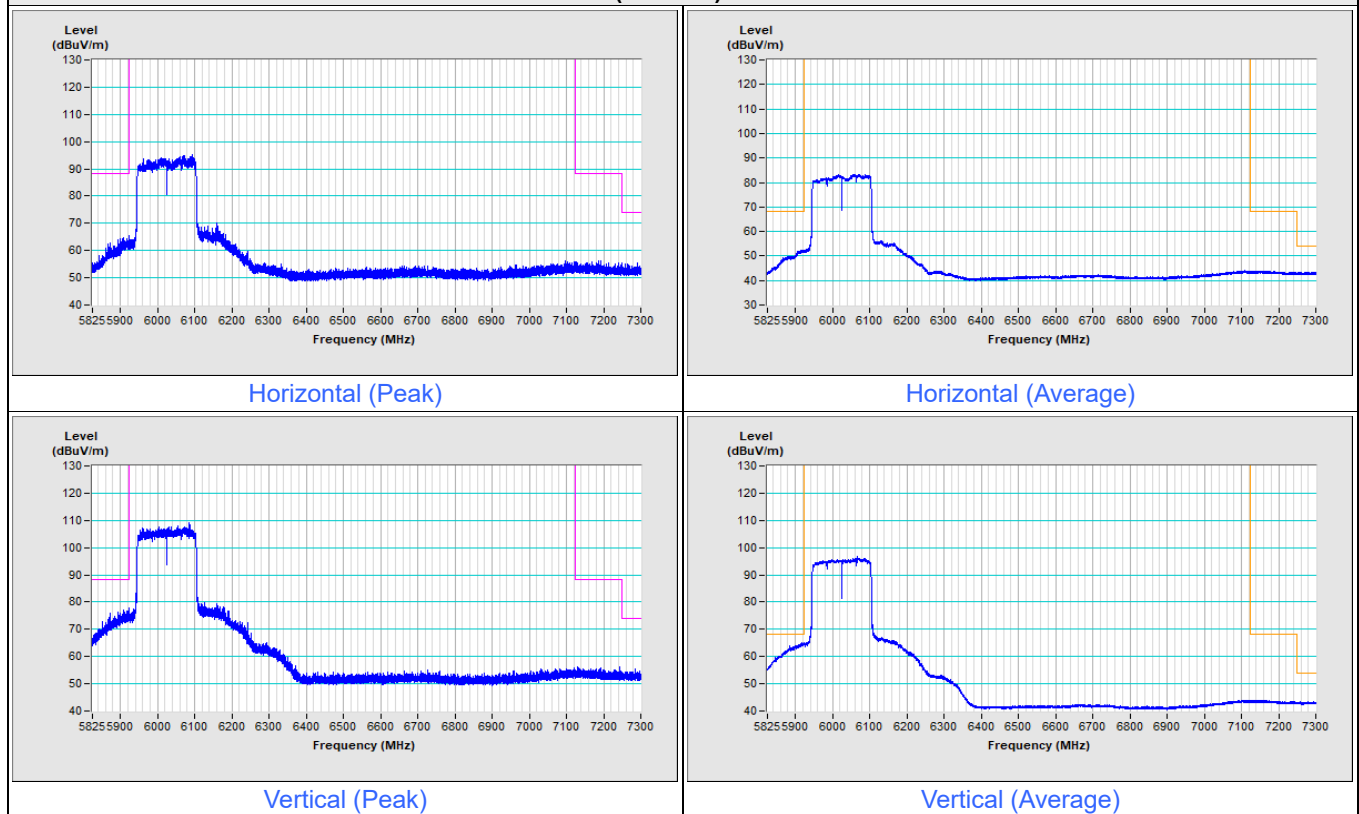


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 1

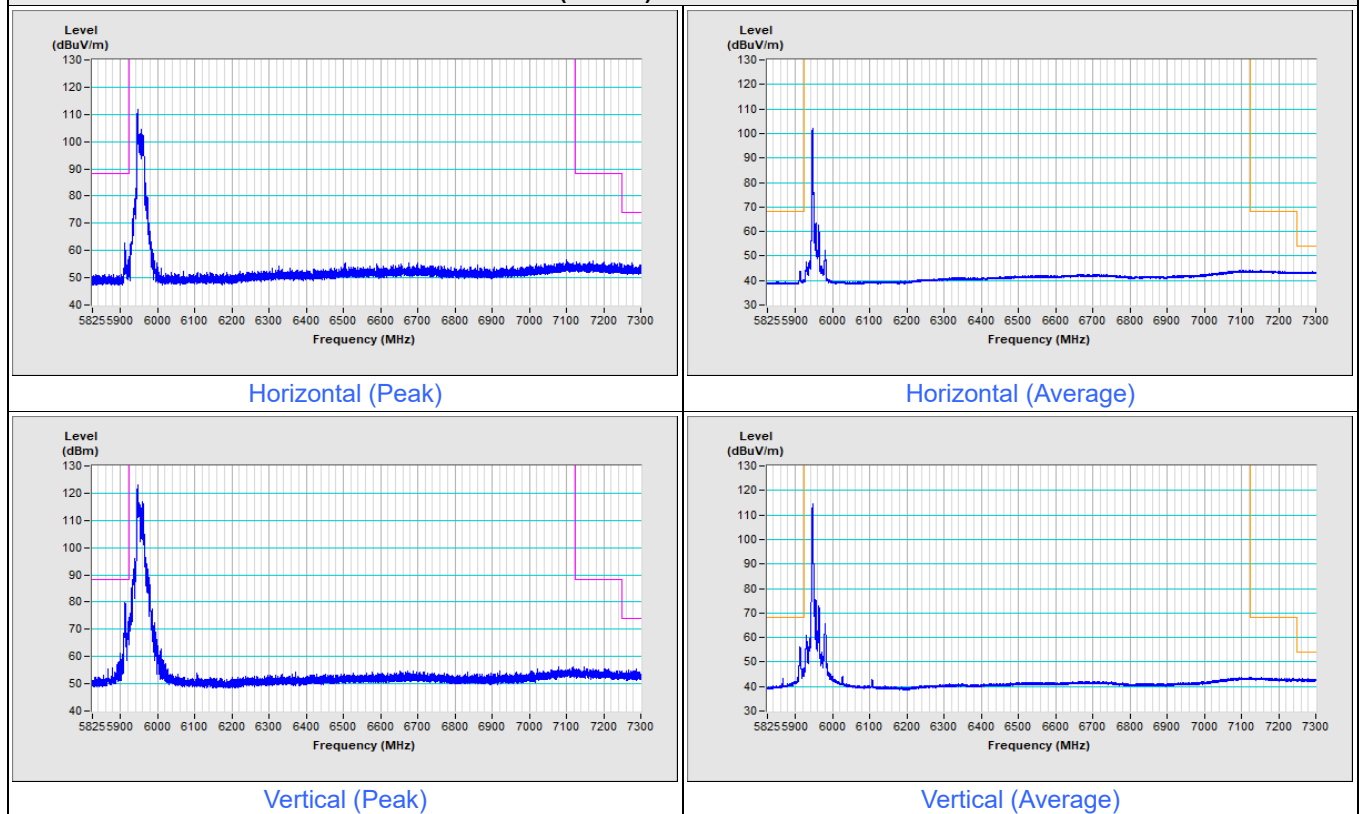


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

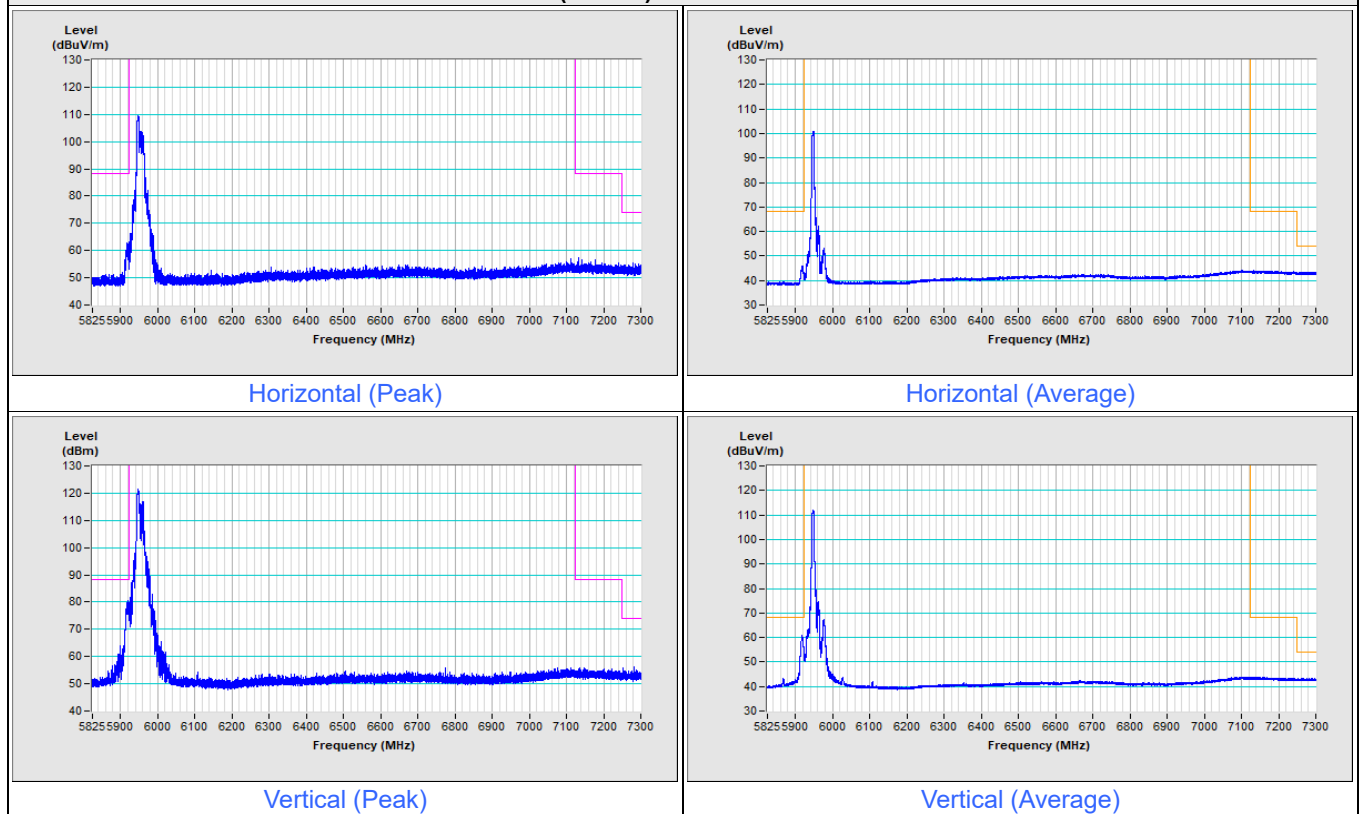


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 1

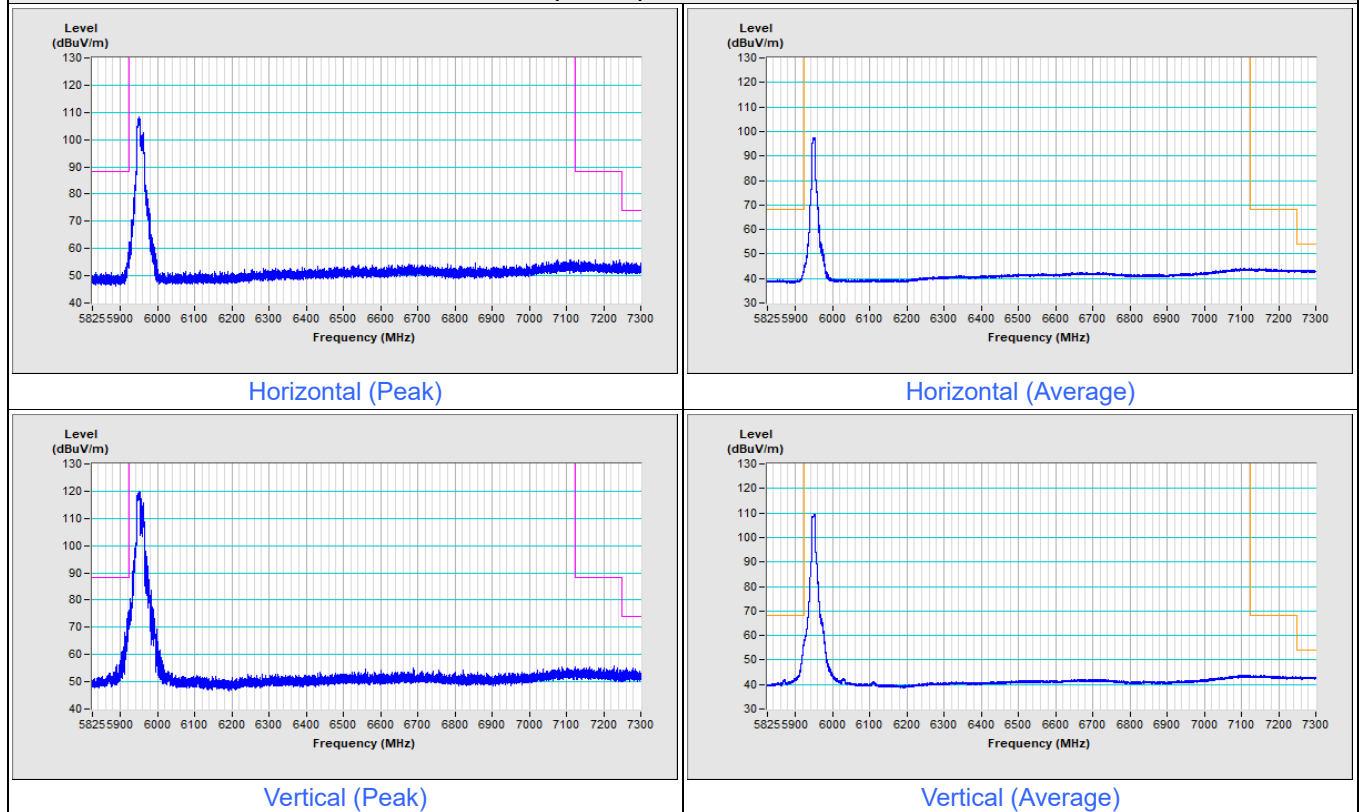


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

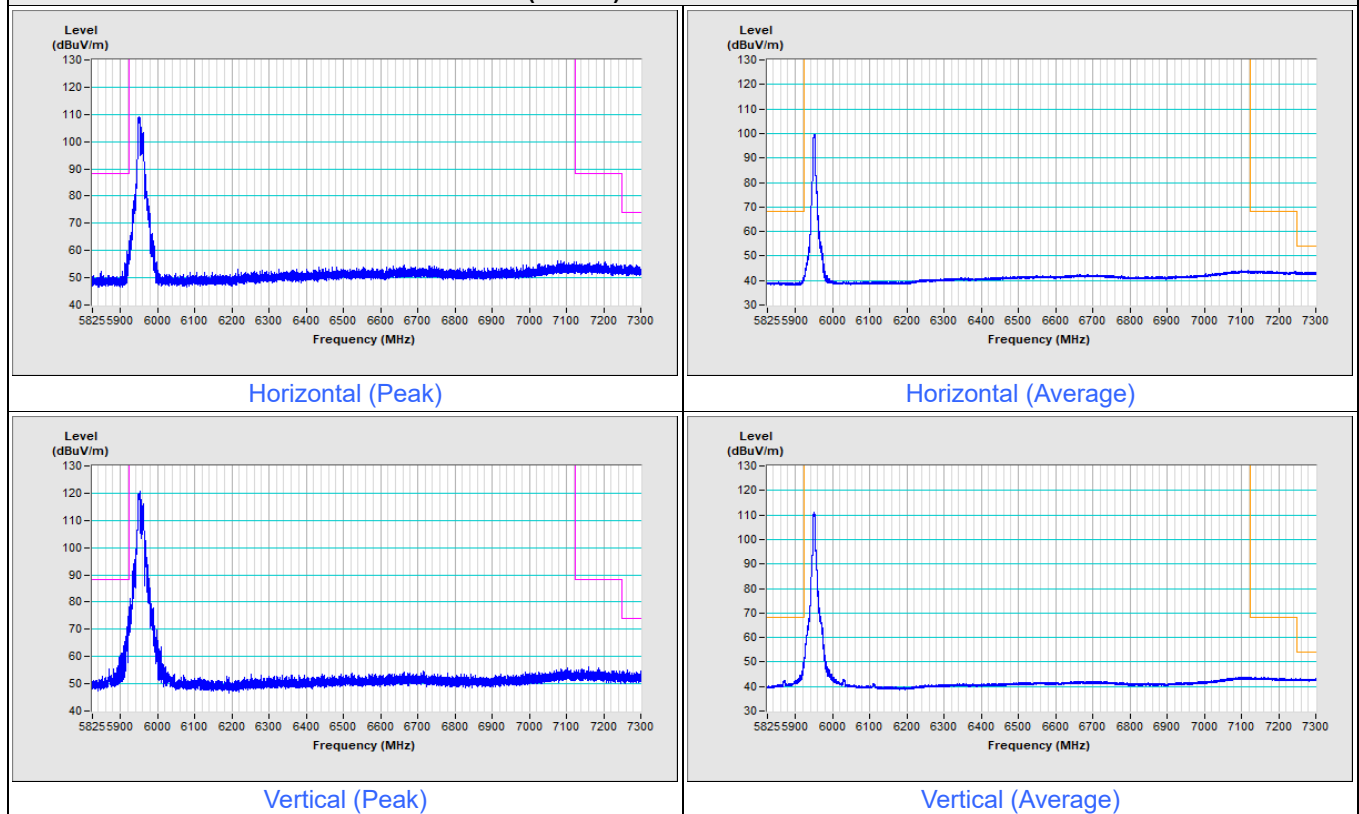


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

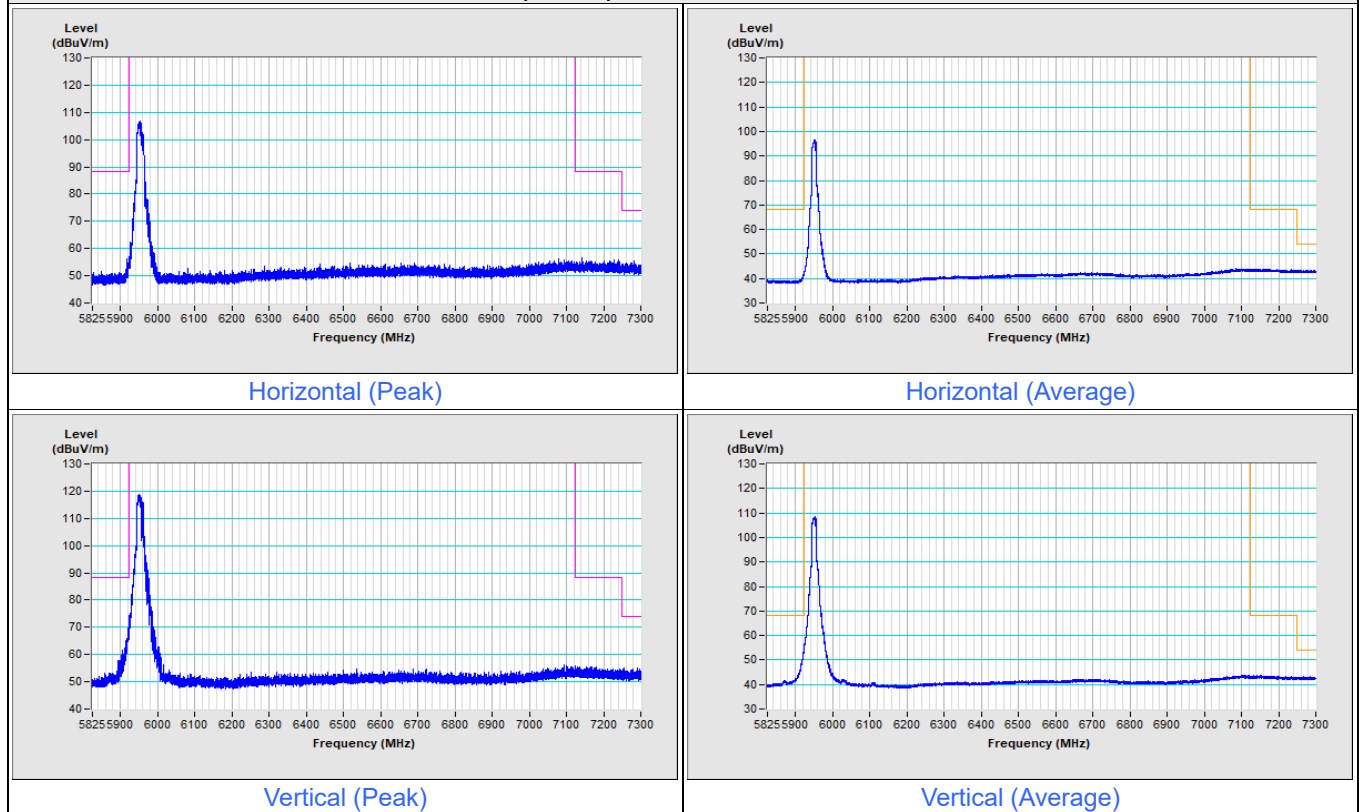


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT80) 484+242-tone MRU Channel 7

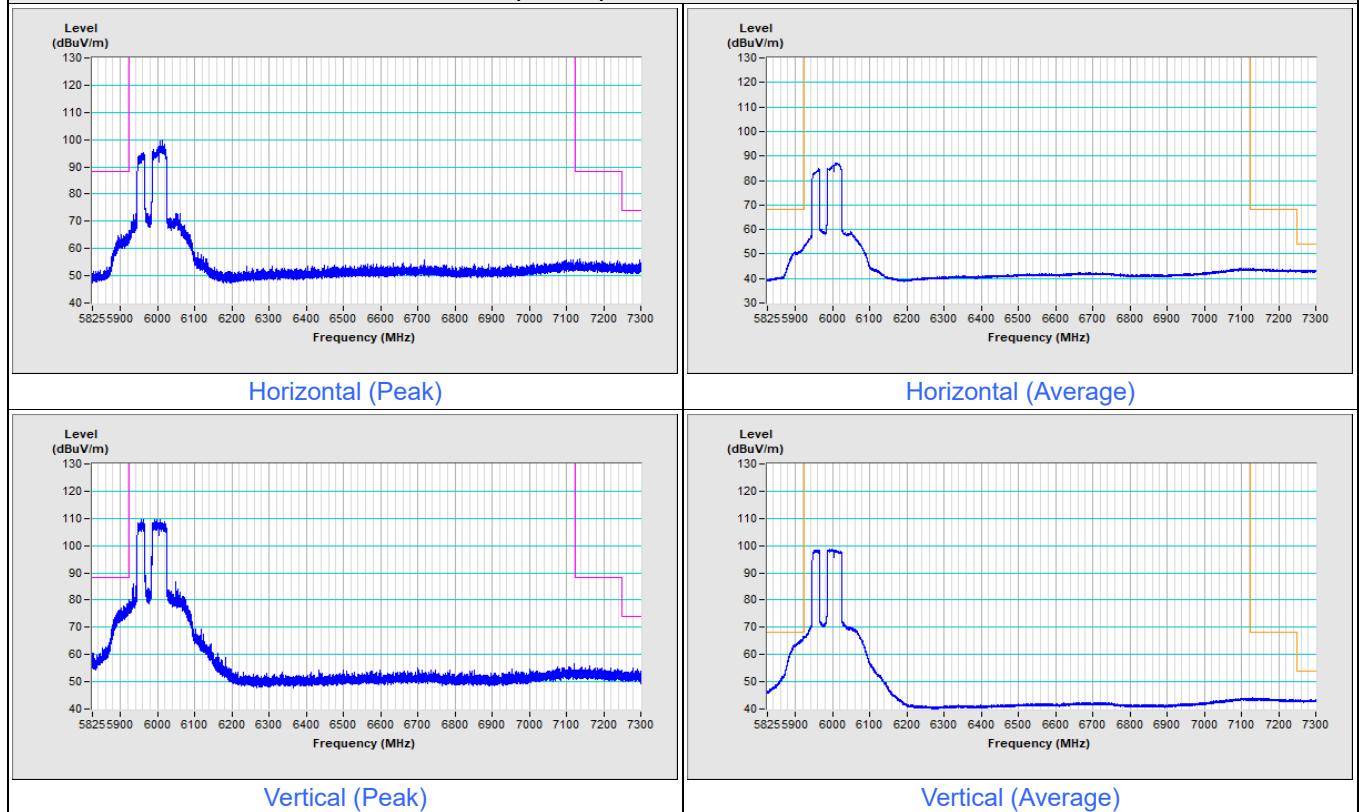


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 15

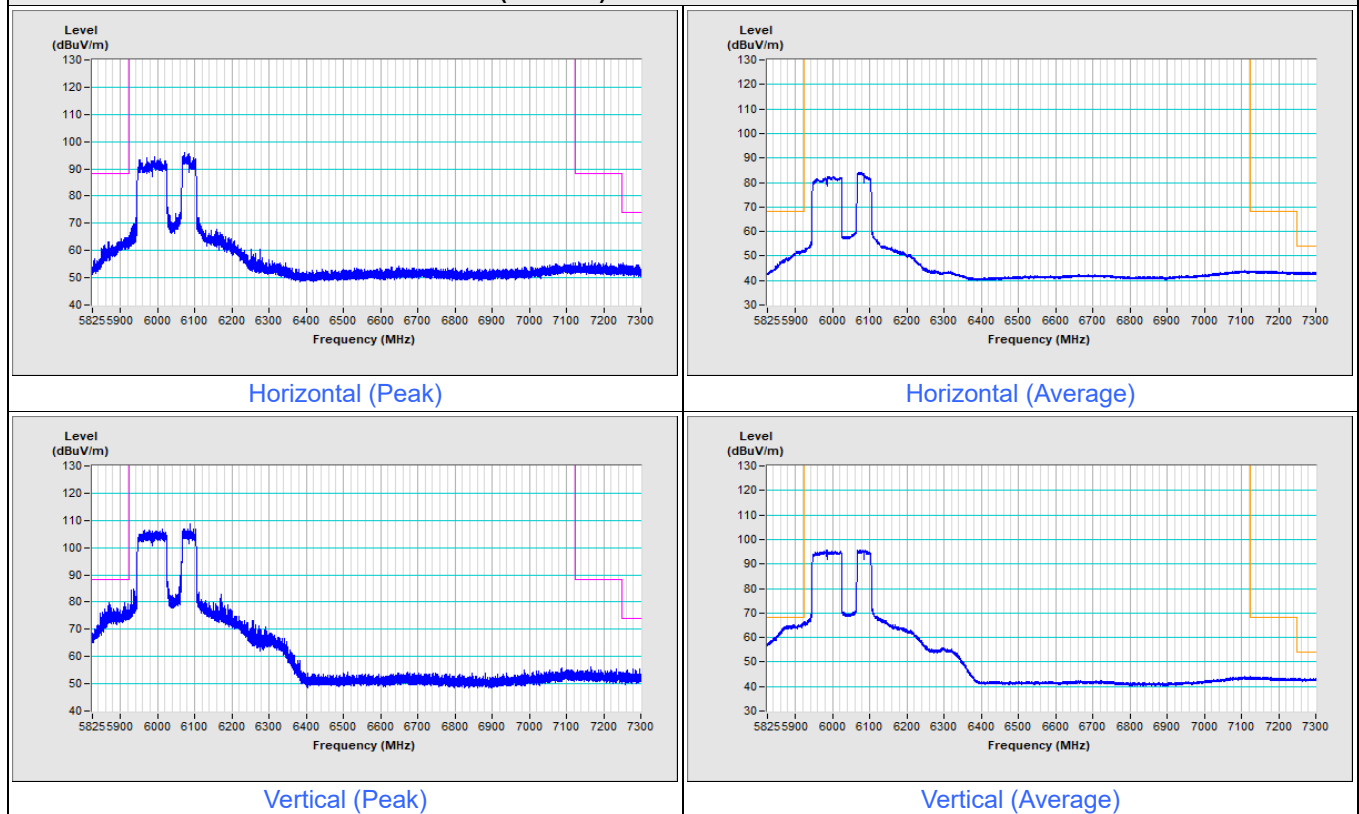

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 15

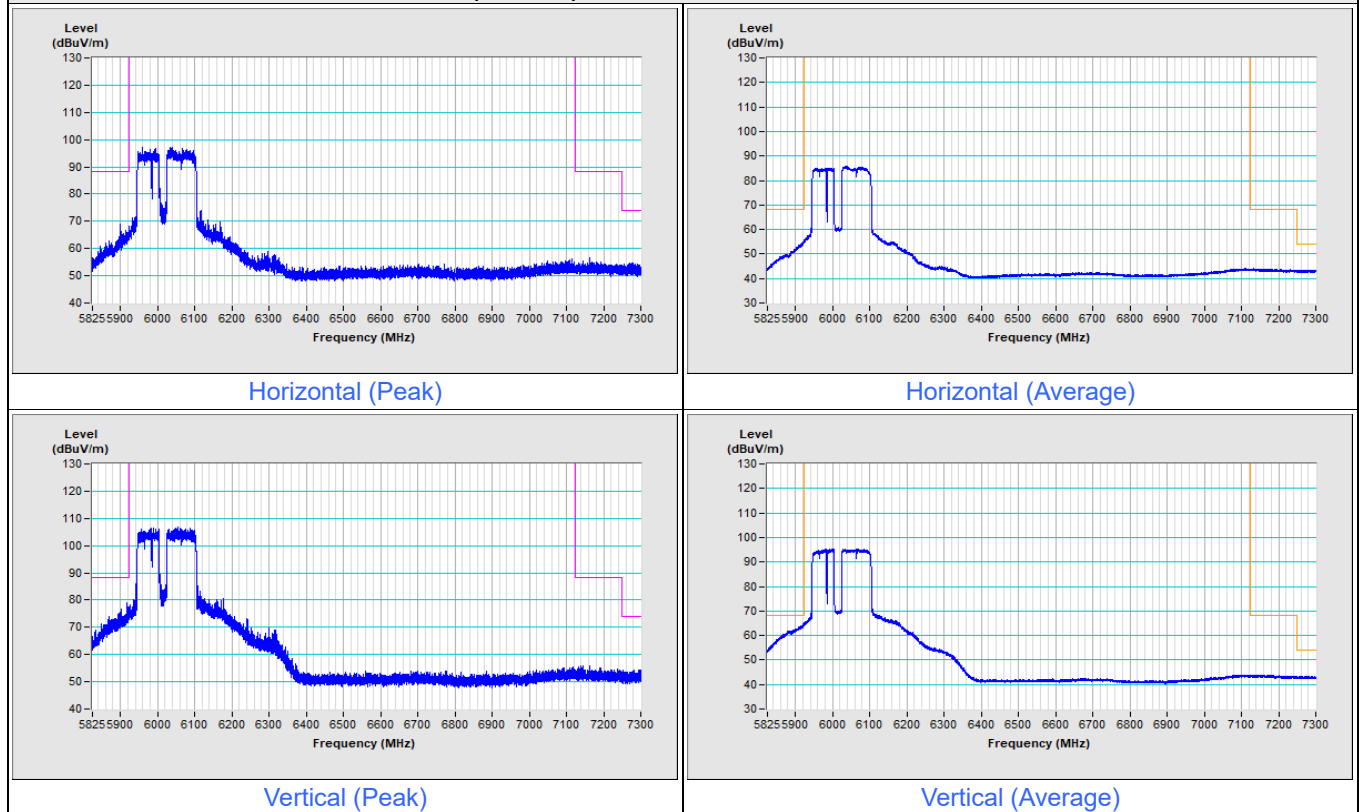


Plot of Other Emission

Indoor client

Mode A

2Tx

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

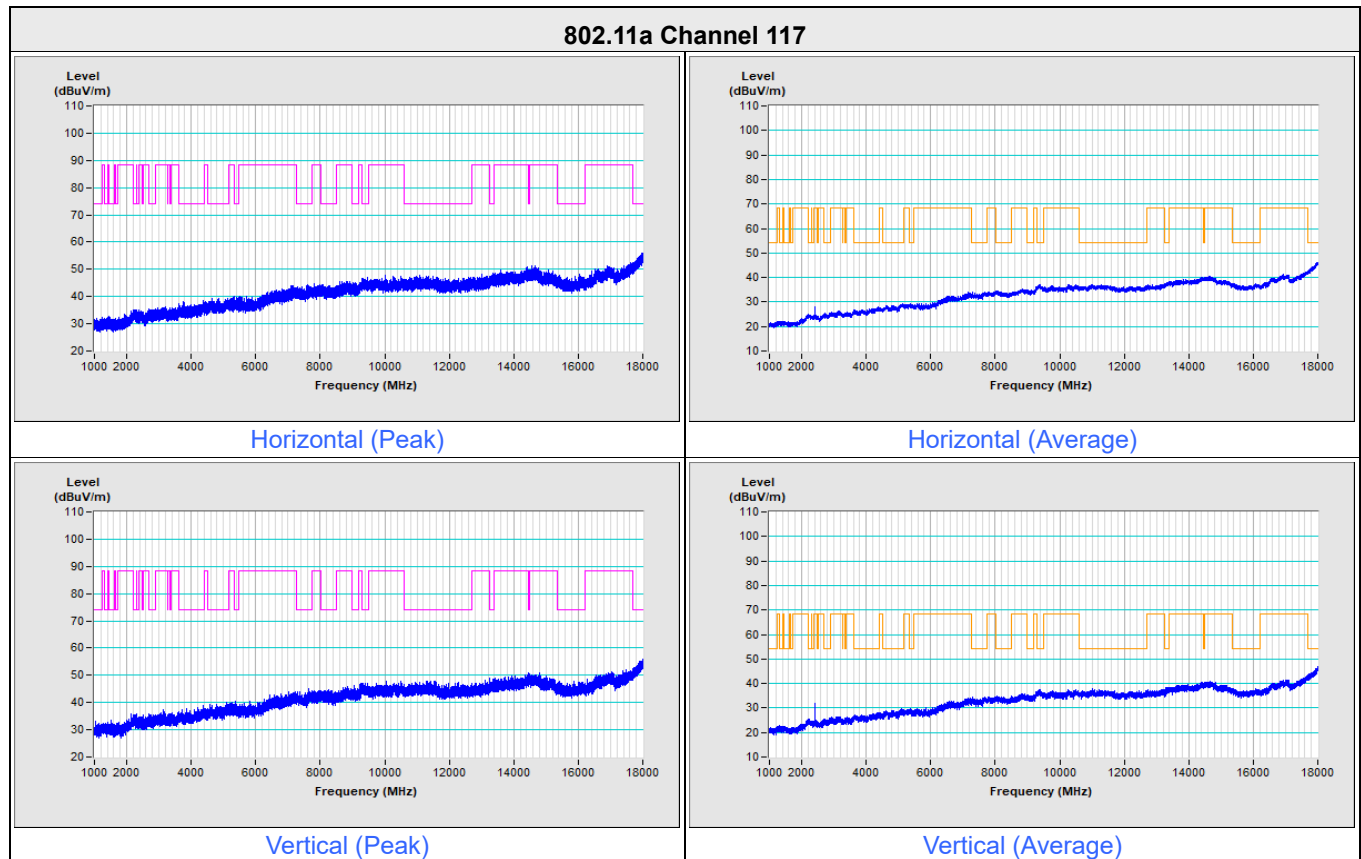


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

2Tx NSS2


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

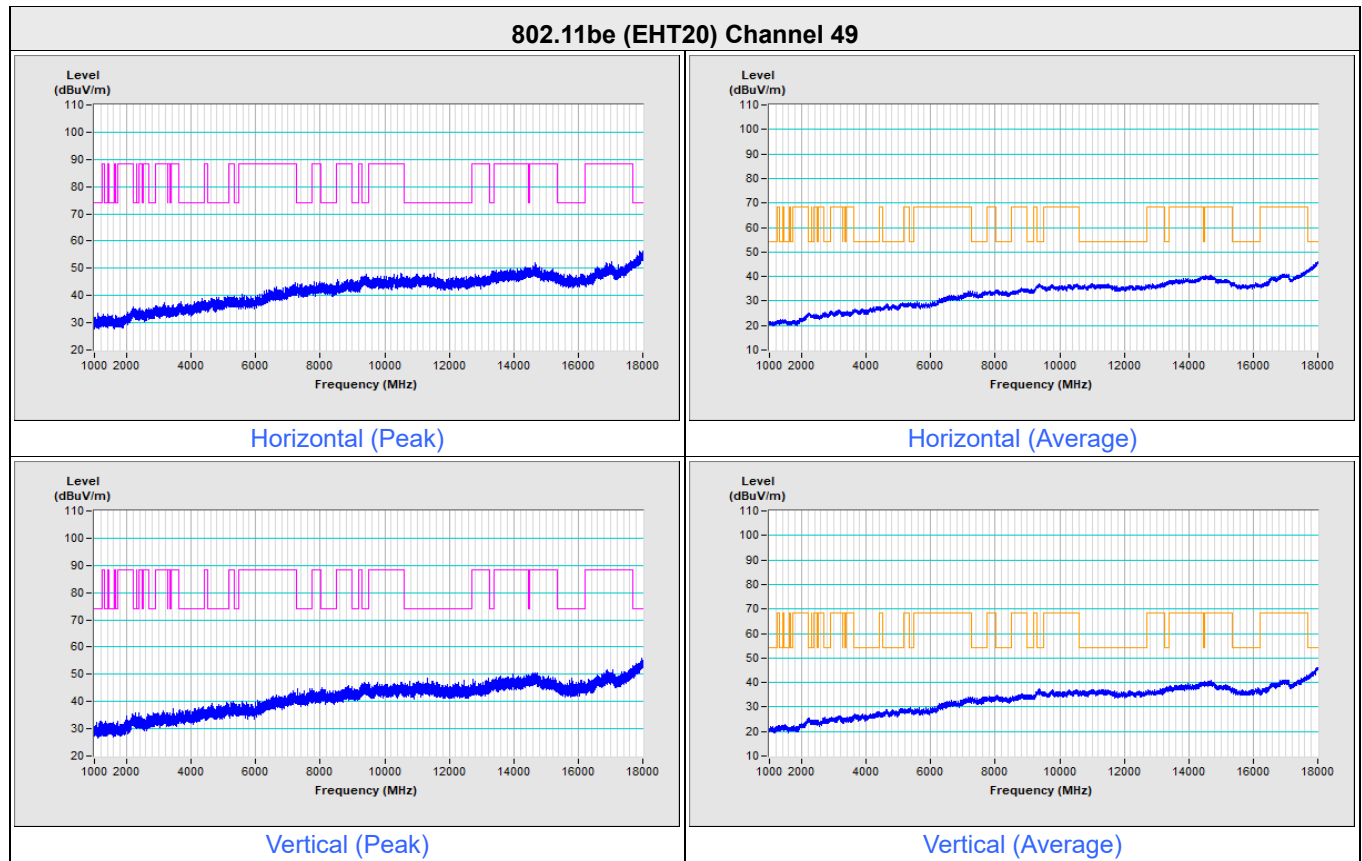

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

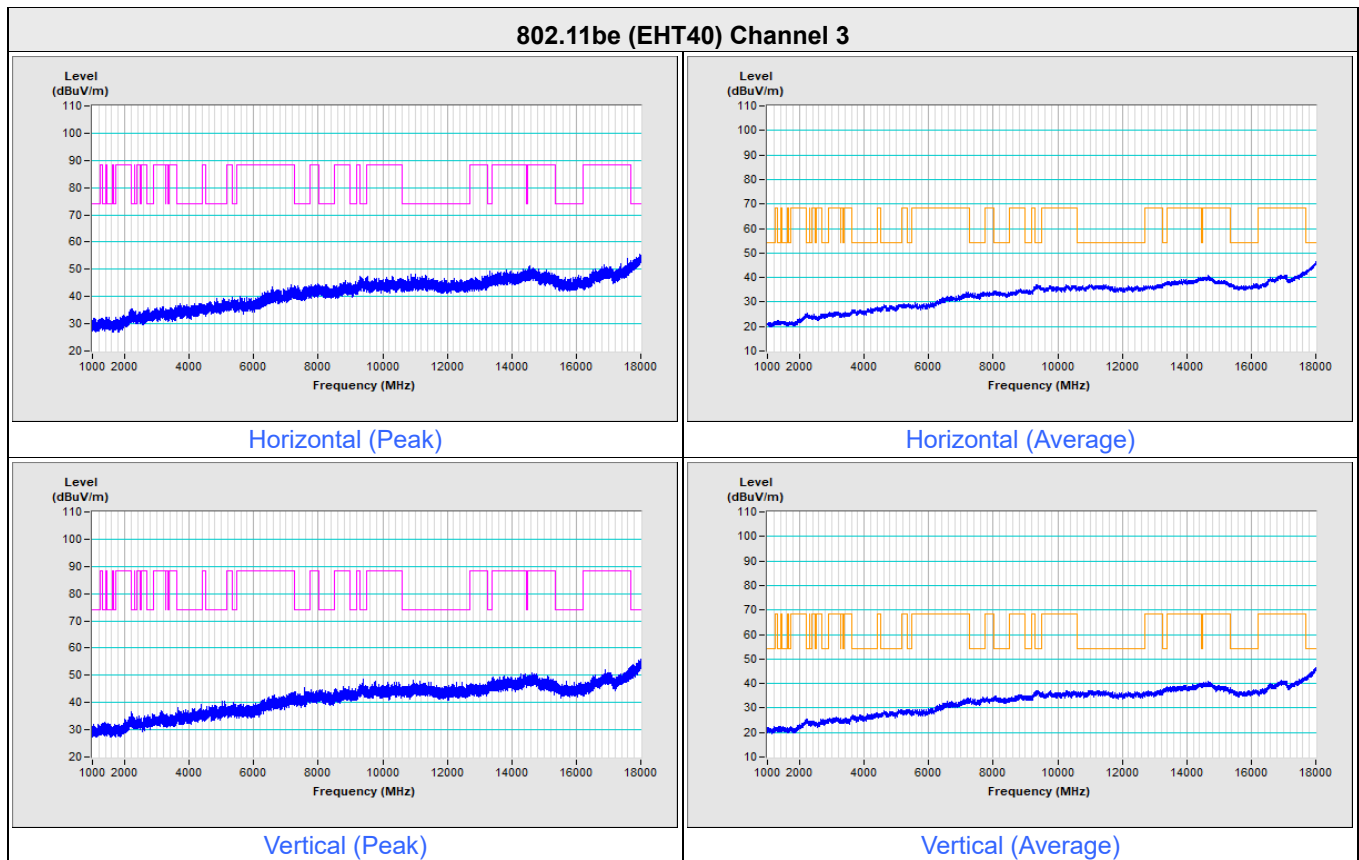

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

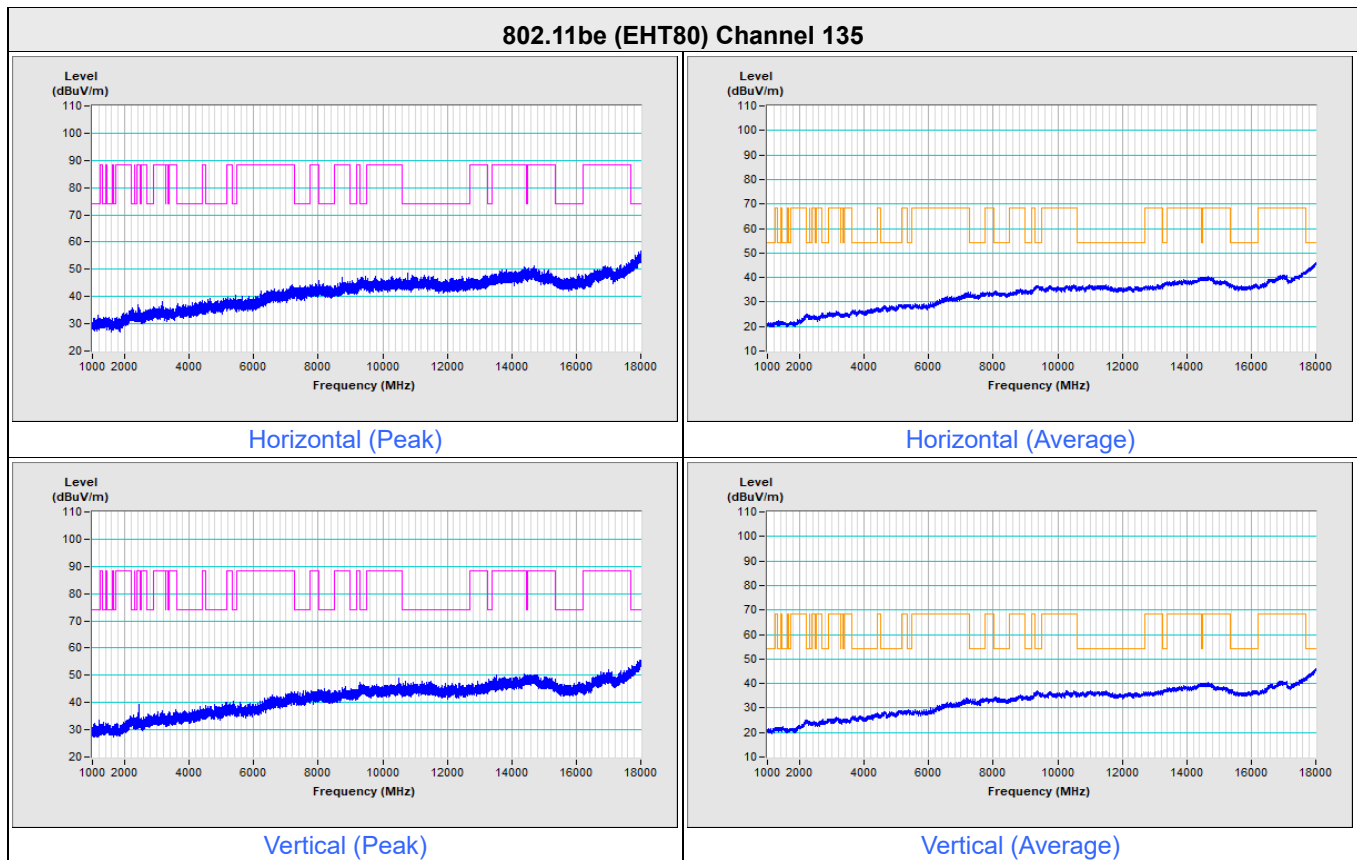

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

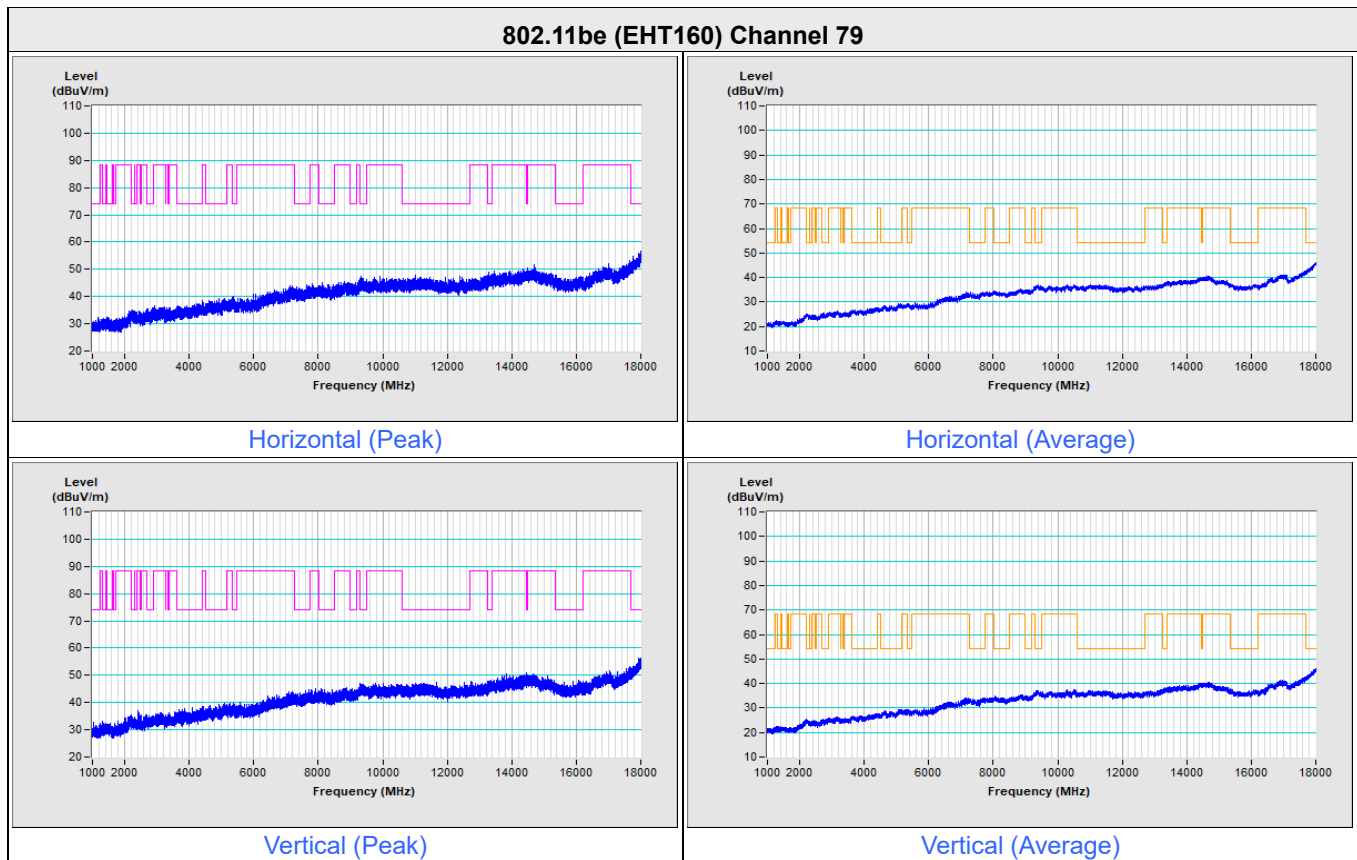

Notes:


1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Standard client

Mode A(PIFA)

2Tx

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

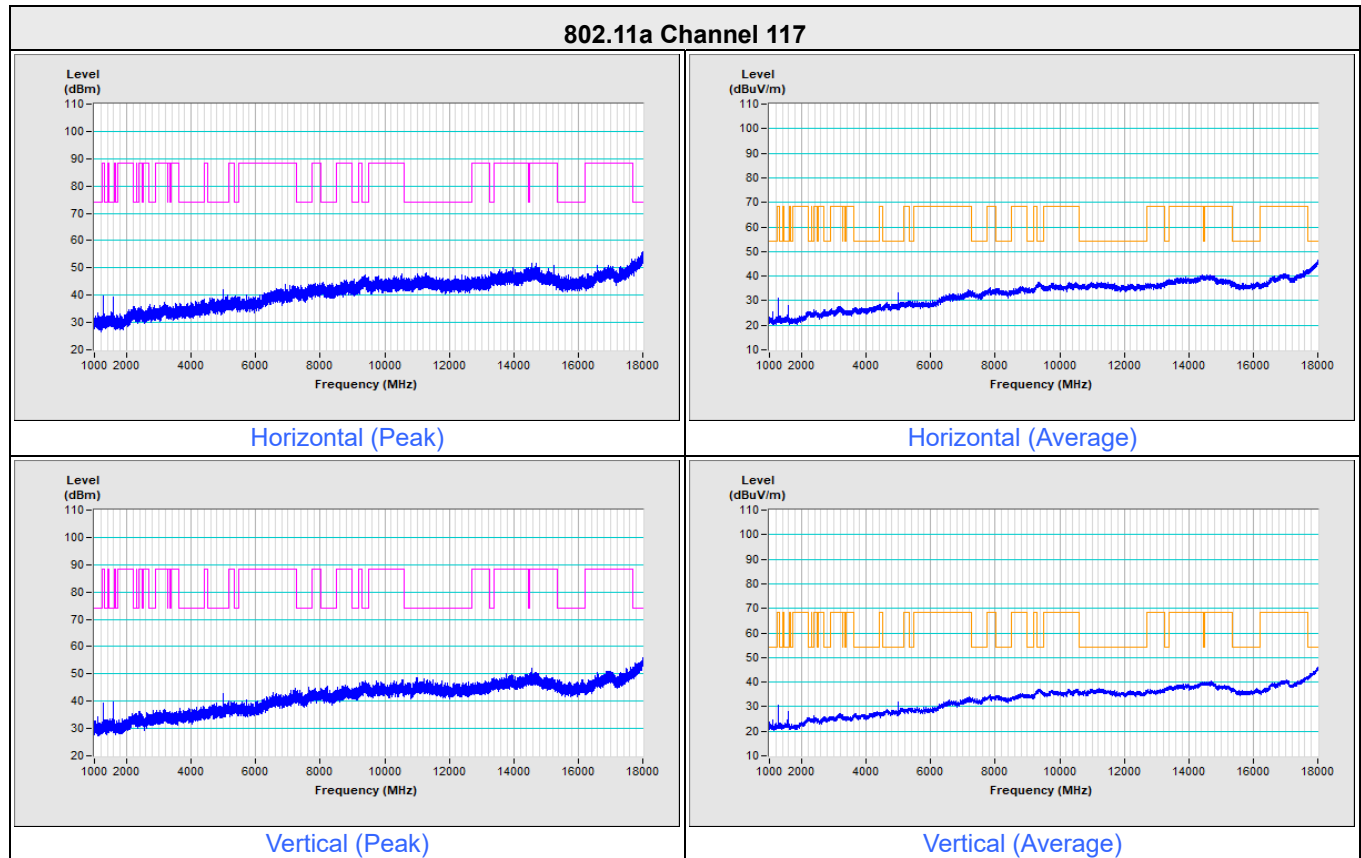


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

2Tx NSS2


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

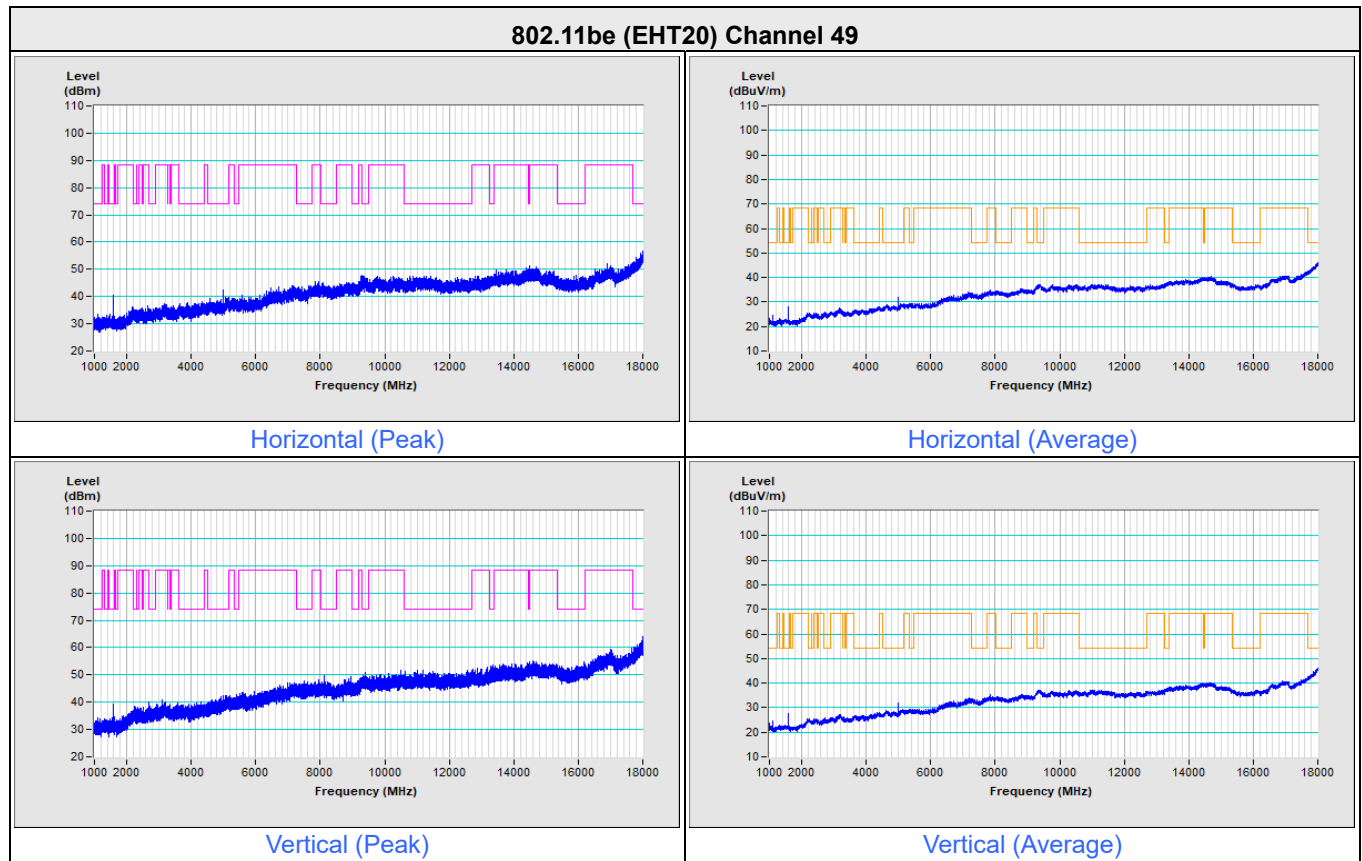

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

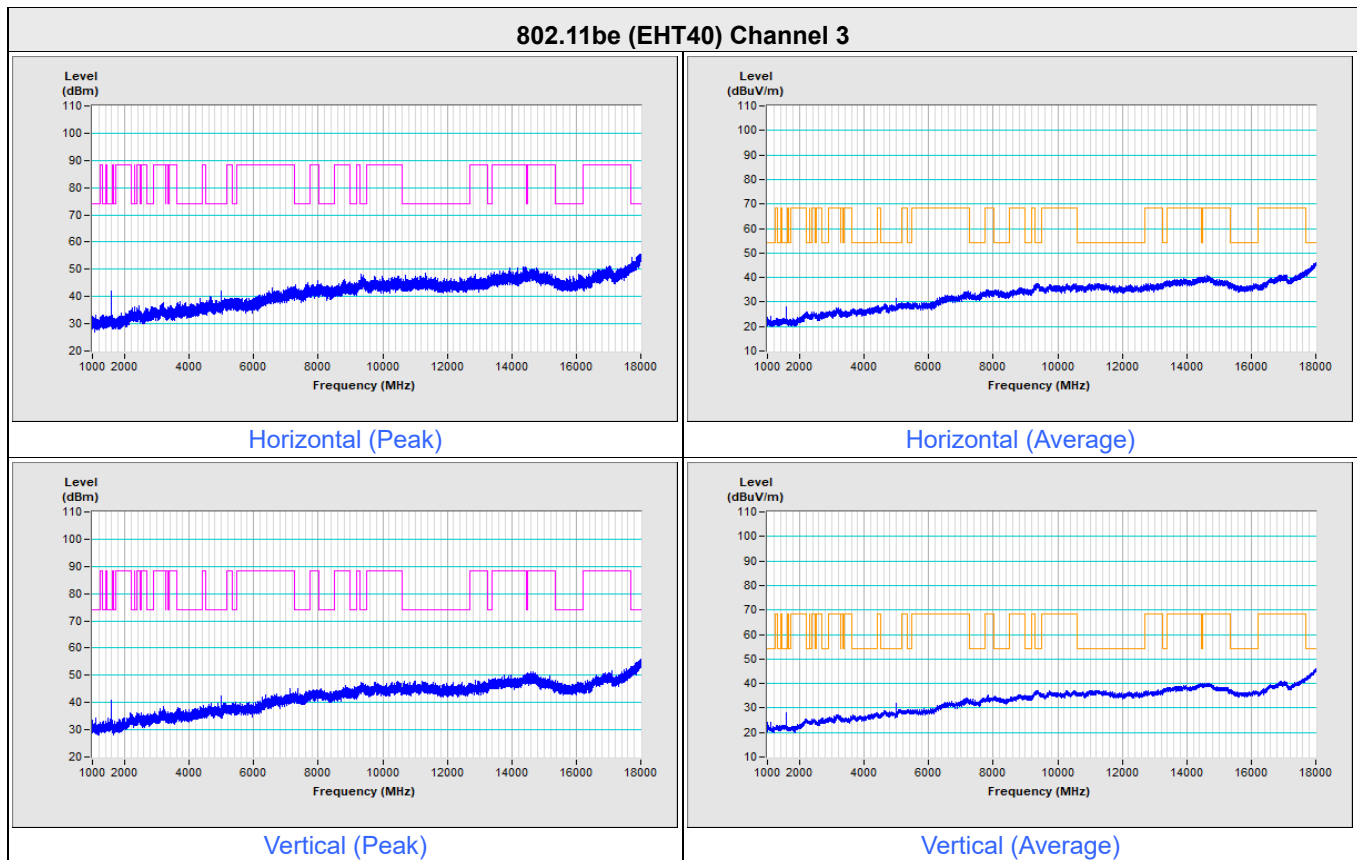

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

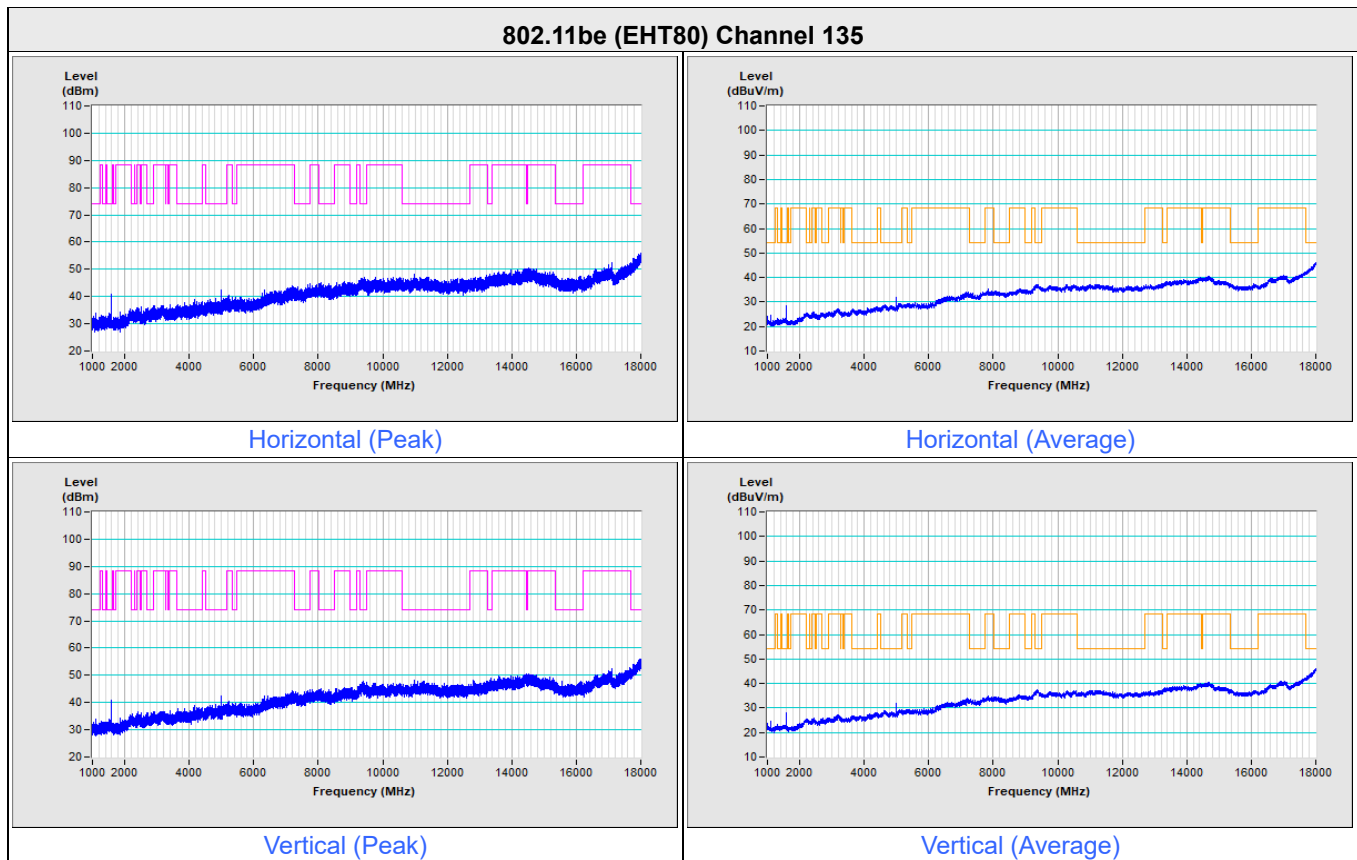

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

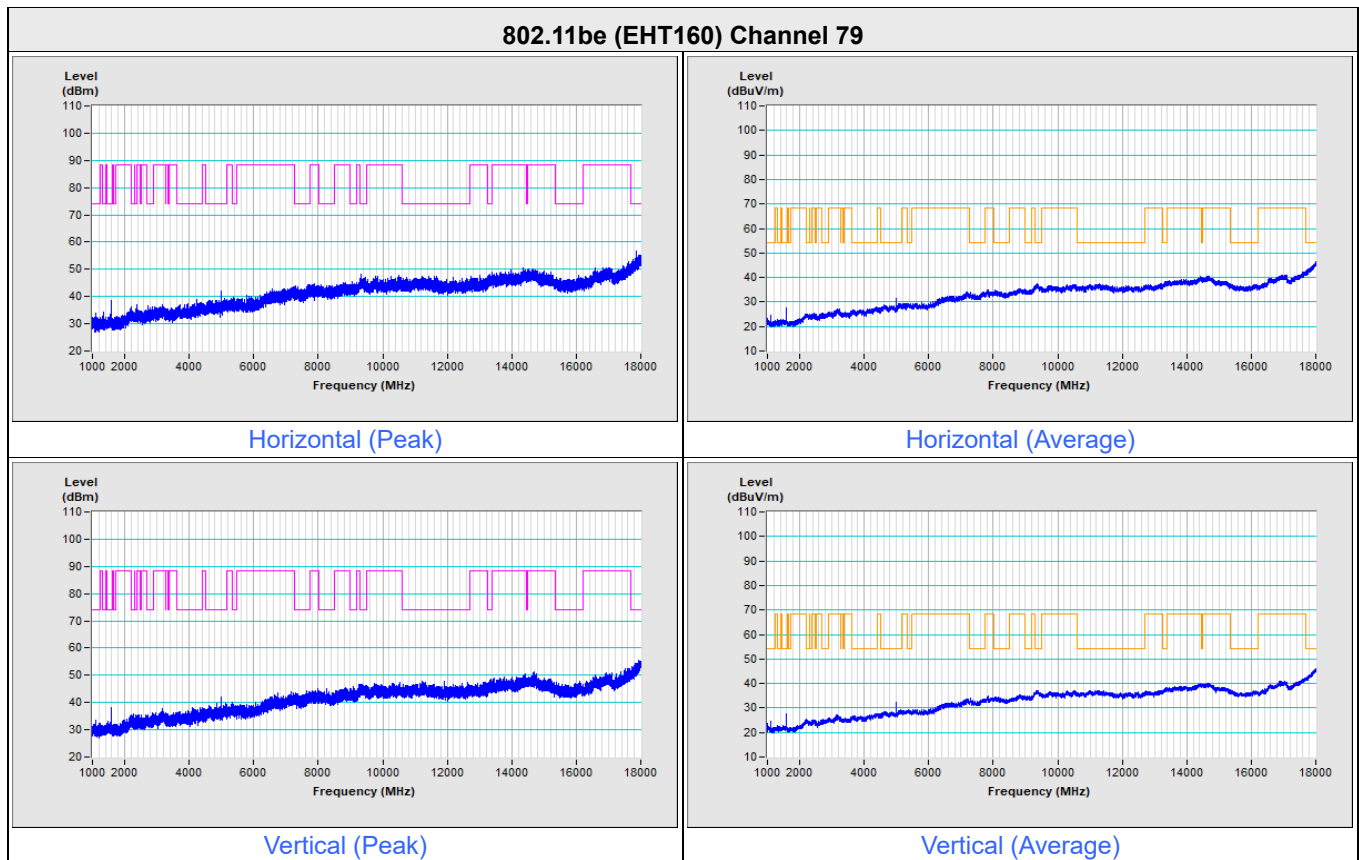

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

7.10 APC (Automatic Power Control) and Proper Power Adjustment

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Cheng
--------------	---------	---------------------------	--------------	------------	------------



For Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Associated AP Type	Conducted Power (dBm)		Total Power (dBm)	Directional Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Test Result
			Chain 0	Chain 1					
37	6135	Standard Power	13.80	13.59	16.71	5.00	21.71	30	Pass
		Low Power	11.19	10.68	13.95	5.00	18.95	24	Pass

Note: EIRP (dBm) = Conducted Power (dBm) + Directional Gain (dBi)

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
11be RTL8922DE Combo module	REALTEK	RTL8922DE	6002.24.141.0

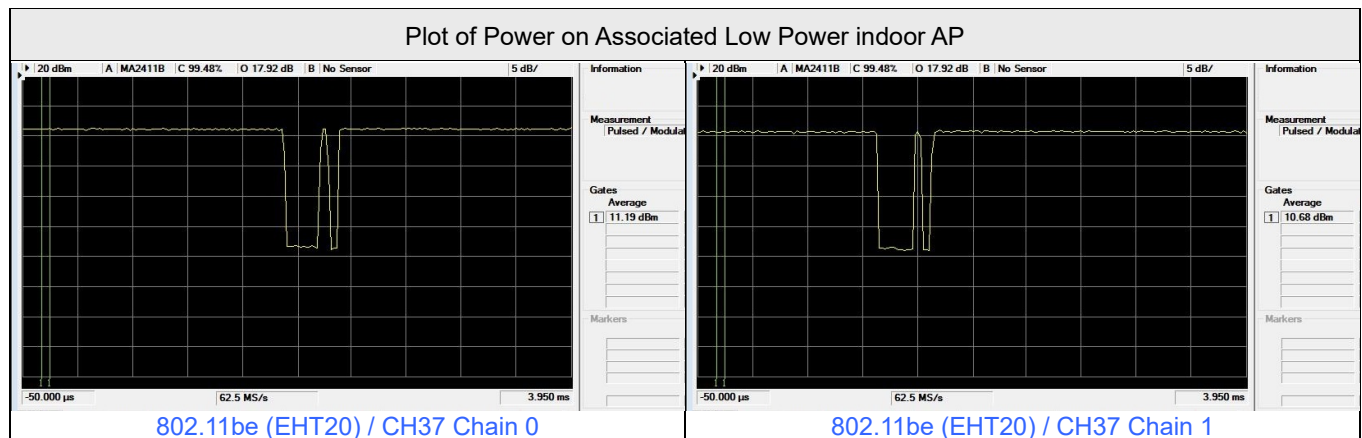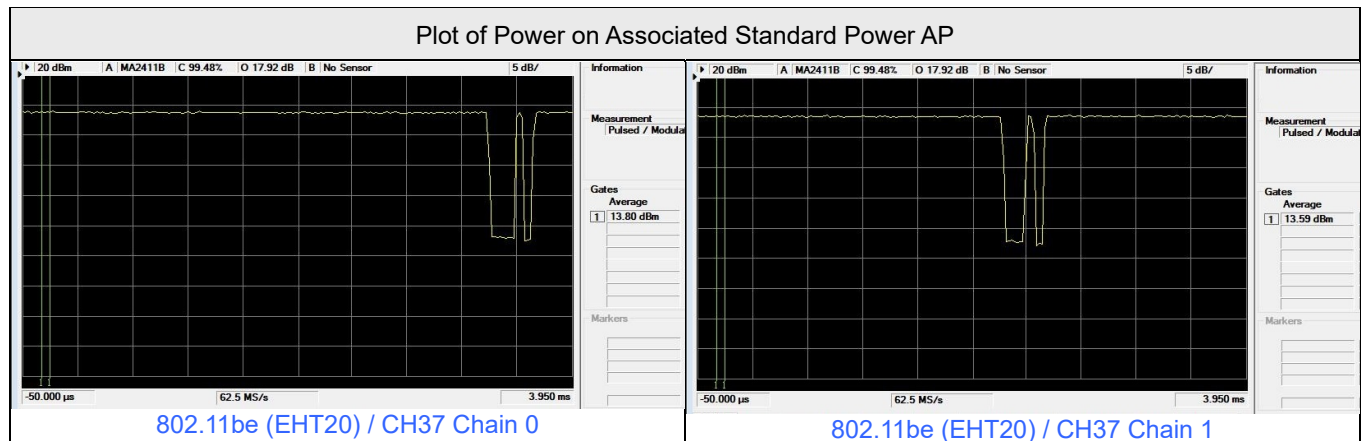

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Cheng
--------------	---------	---------------------------	--------------	------------	------------

For Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	Standard AP Registered EIRP (dBm)	Standard Client							Test Result
			Conducted Power (dBm)		Total Power (dBm)	Directional Gain (dBi)	EIRP (dBm)	Adjust Power Level (dB)	Adjust Power Level Limit (dB)	
			Chain 0	Chain 1						
37	6135	36	13.80	13.59	16.71	5.00	21.71	14.29	> 6	Pass
37	6135	24	5.35	4.78	8.08	5.00	13.08	10.92	> 6	Pass
37	6135	16	-4.49	-4.39	-1.43	5.00	3.57	12.43	> 6	Pass


Notes:

1. EIRP (dBm) = Conducted Power (dBm) + Directional Gain (dBi)
2. Standard Client Adjust Power Level (dB) = Standard AP Registered EIRP (dBm) - Standard Client EIRP (dBm)

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
11be RTL8922DE Combo module	REALTEK	RTL8922DE	6002.24.141.0



Plot of Standard Client Conducted Power when Standard AP Registered EIRP is 16 dBm

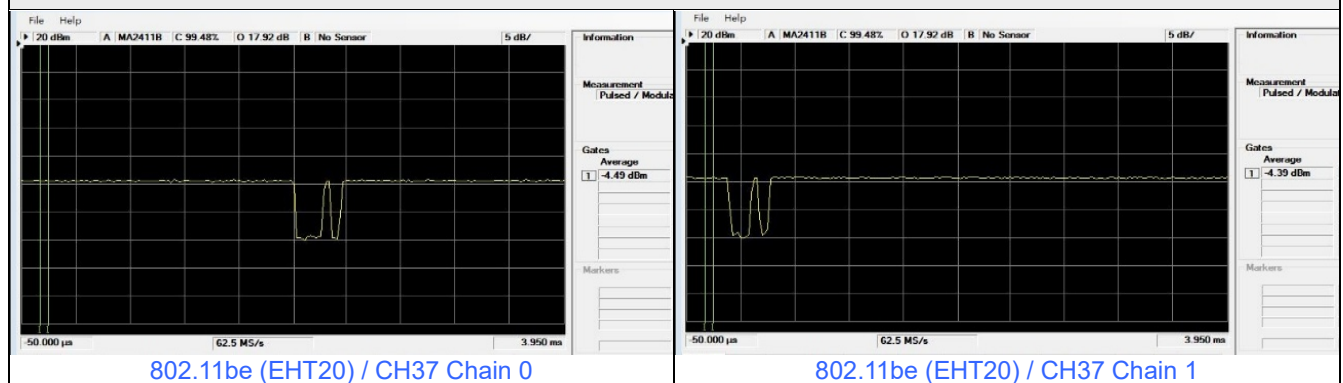

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---