



Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

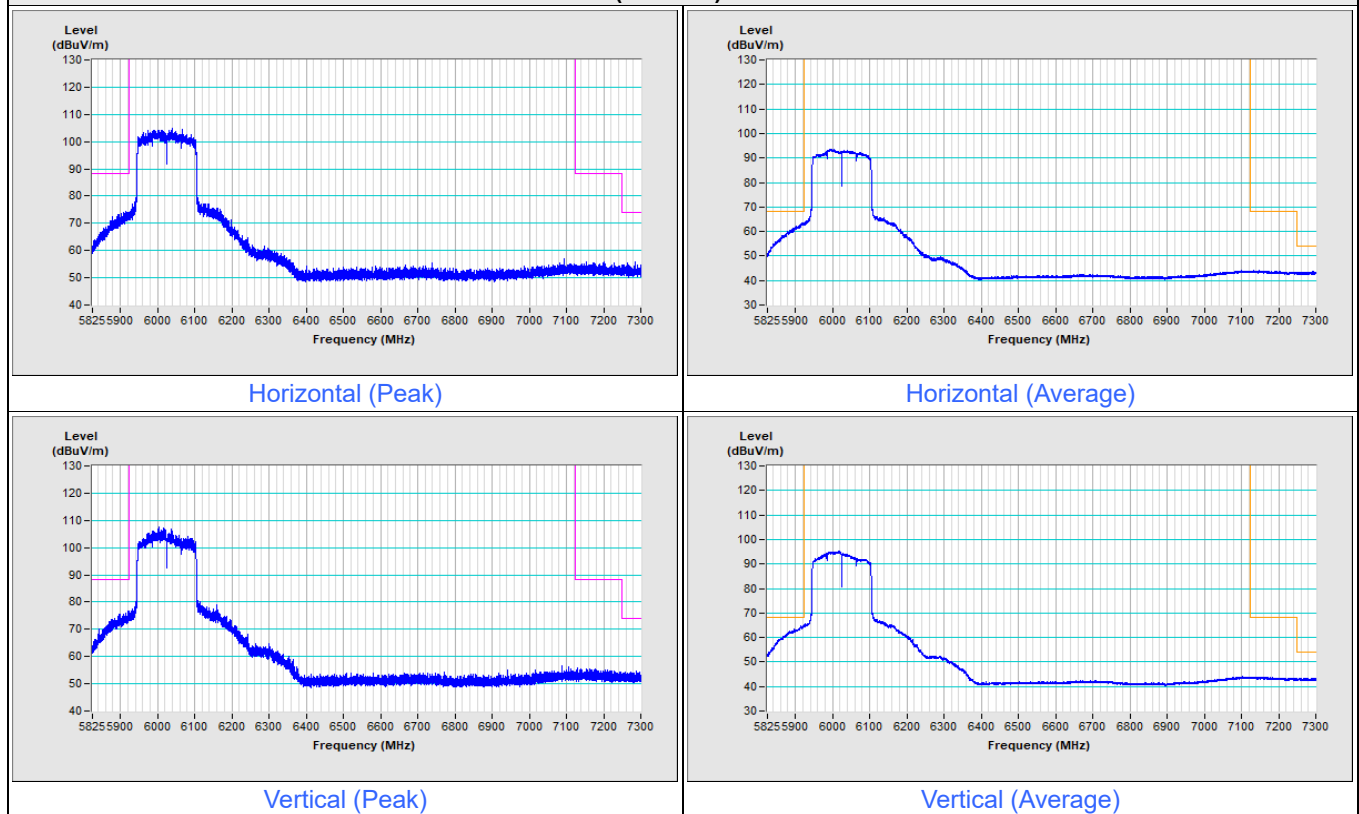


802.11be (EHT160) Channel 207

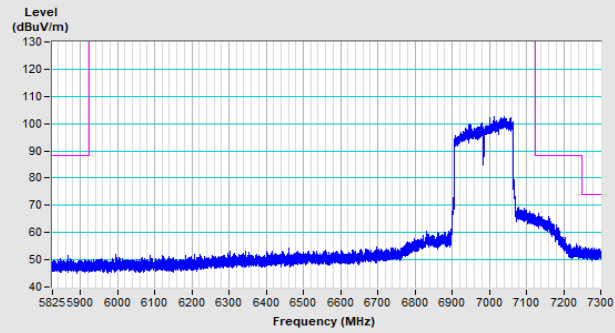


Horizontal (Peak)

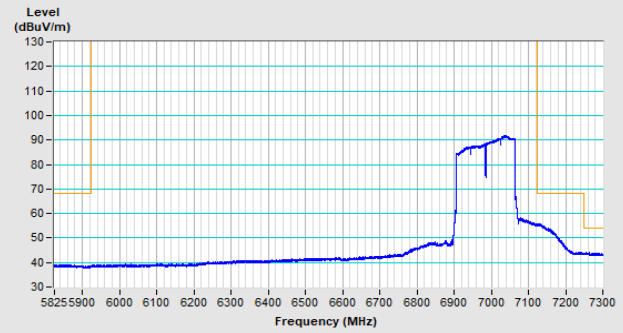

Horizontal (Average)

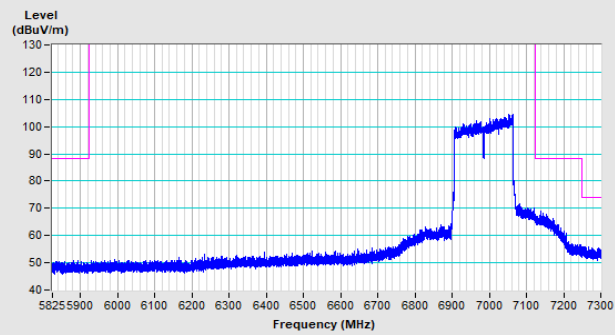


Vertical (Peak)

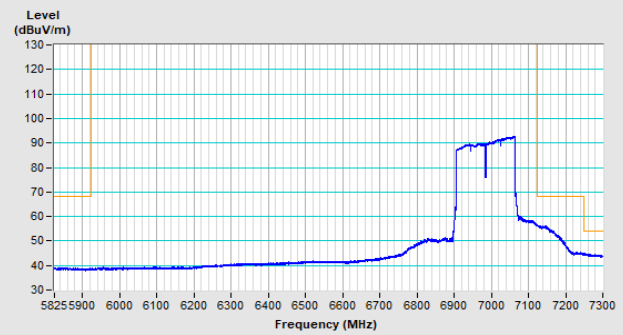


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

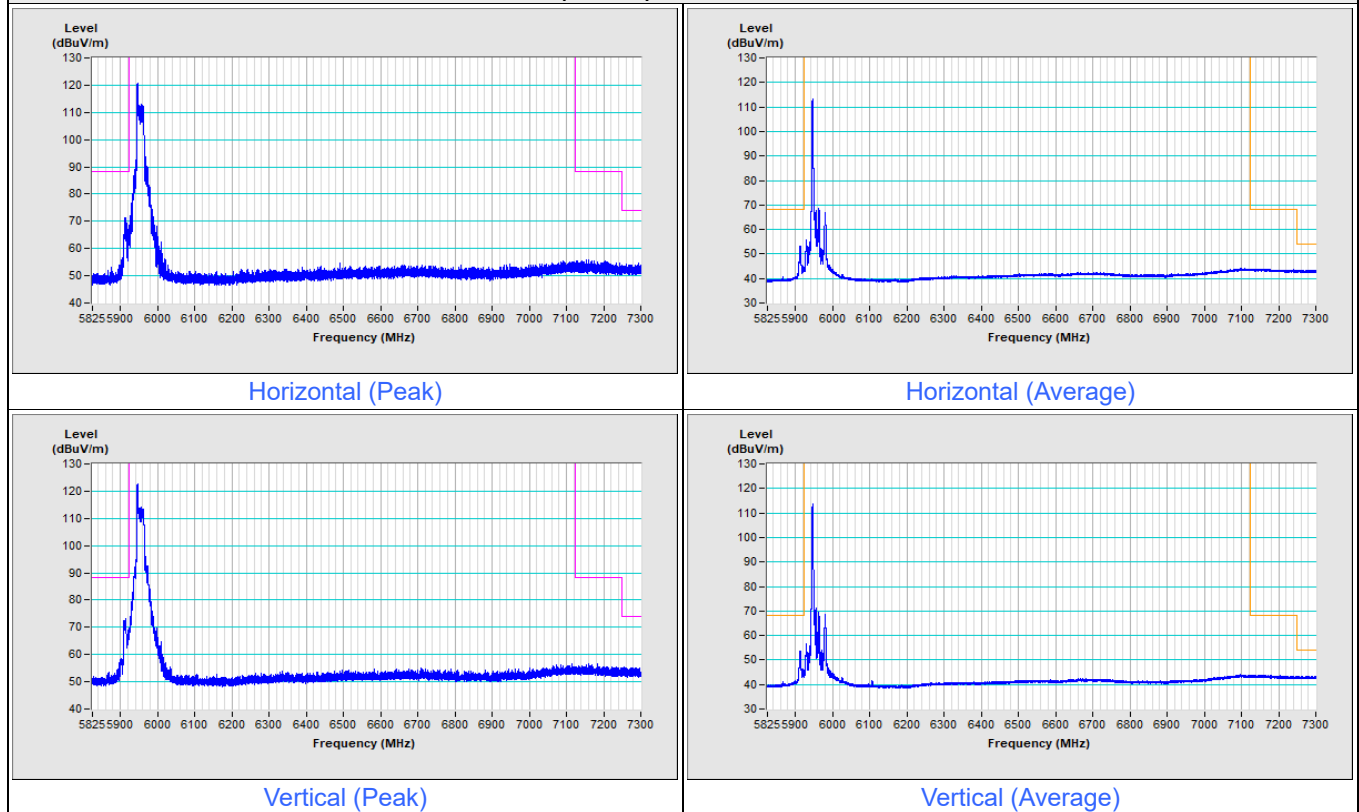

802.11be (EHT20) 26-tone RU Channel 233

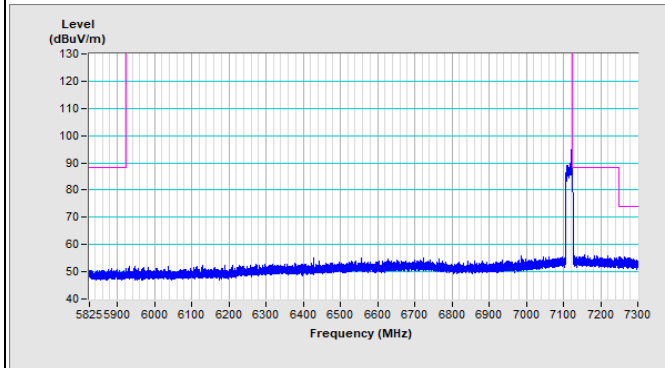


Horizontal (Peak)

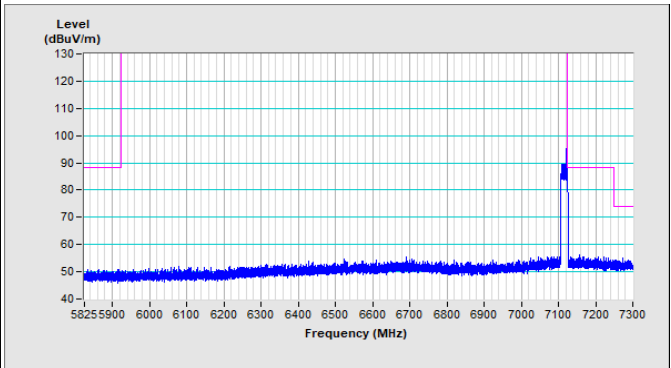


Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233

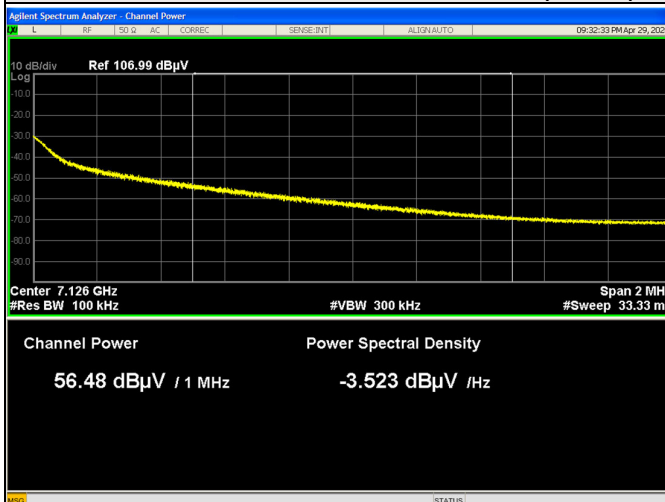


Horizontal (Average)

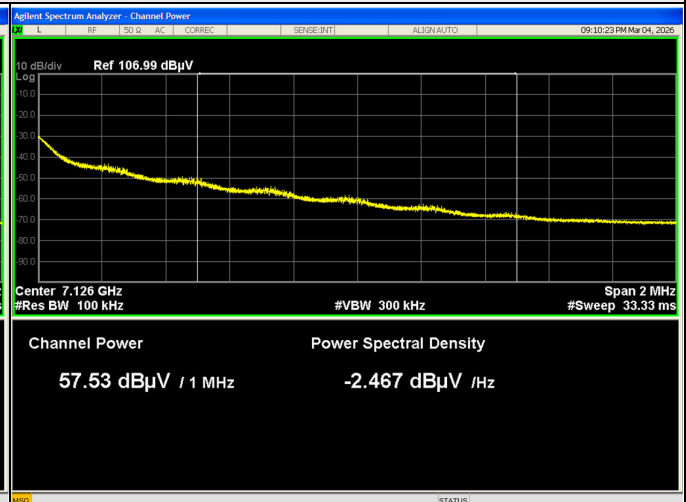


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

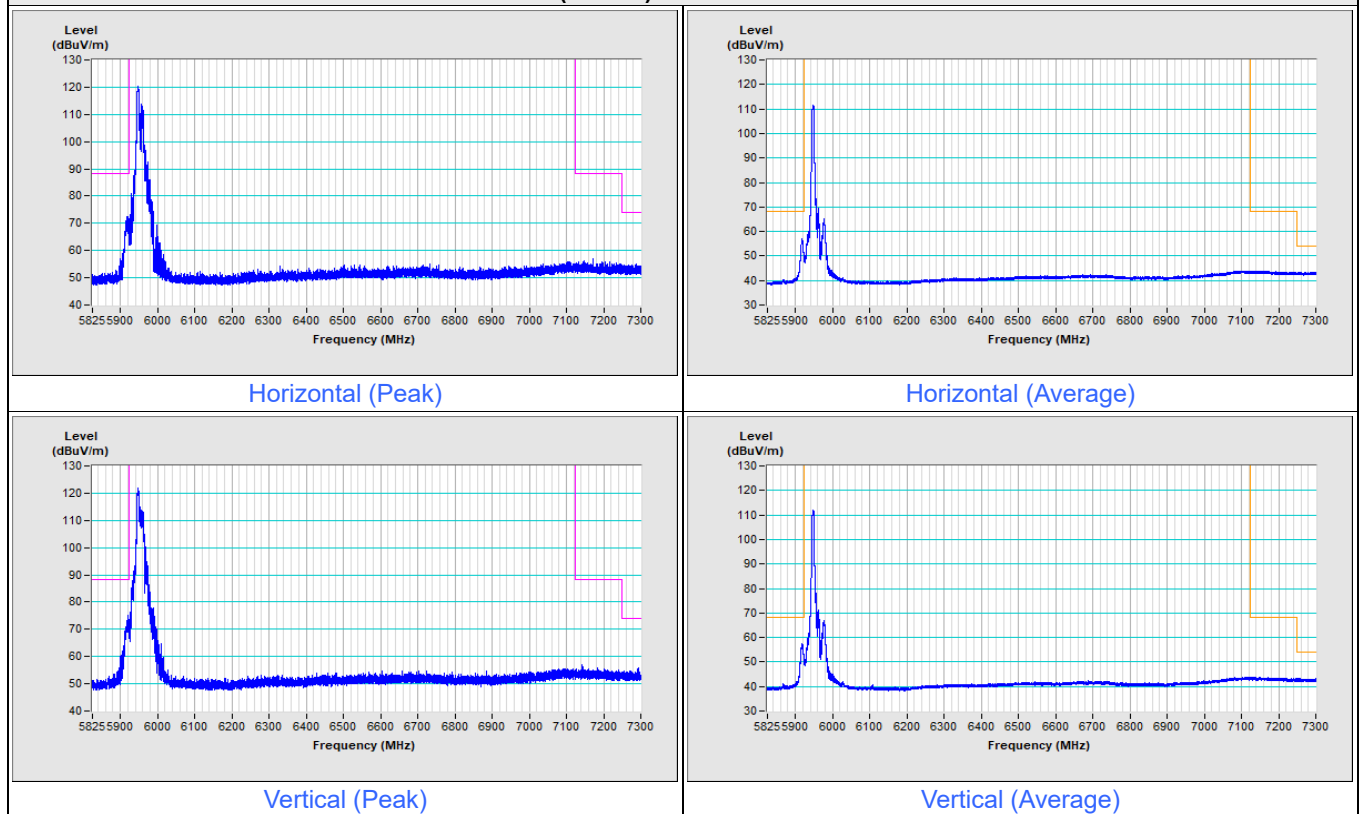

802.11be (EHT20) 52-tone RU Channel 233

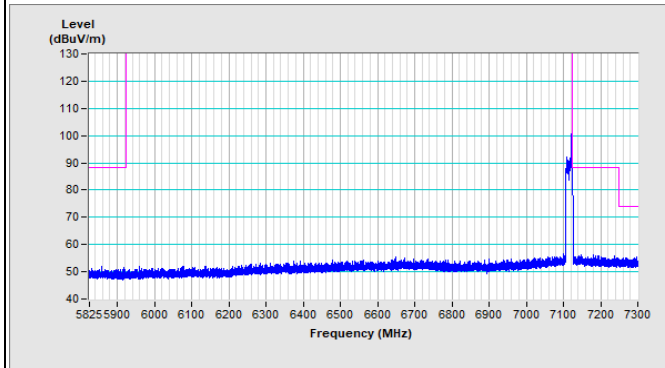


Horizontal (Peak)

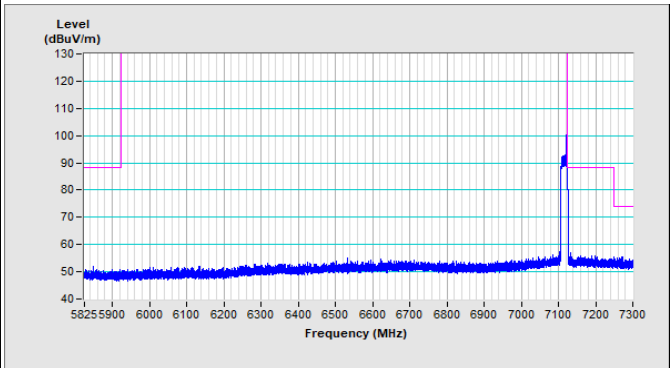

Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233

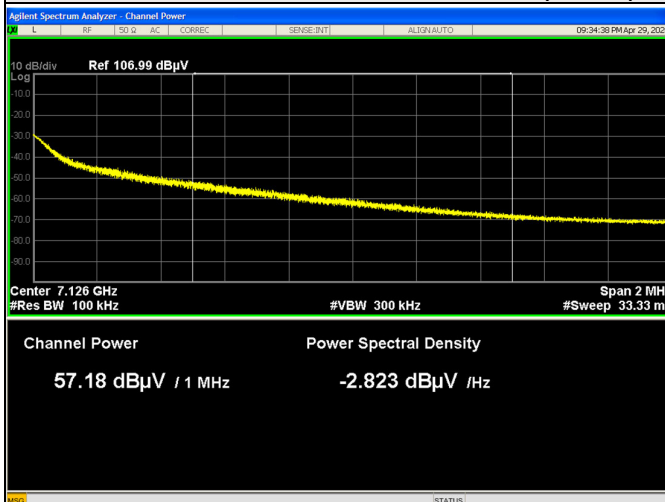


Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

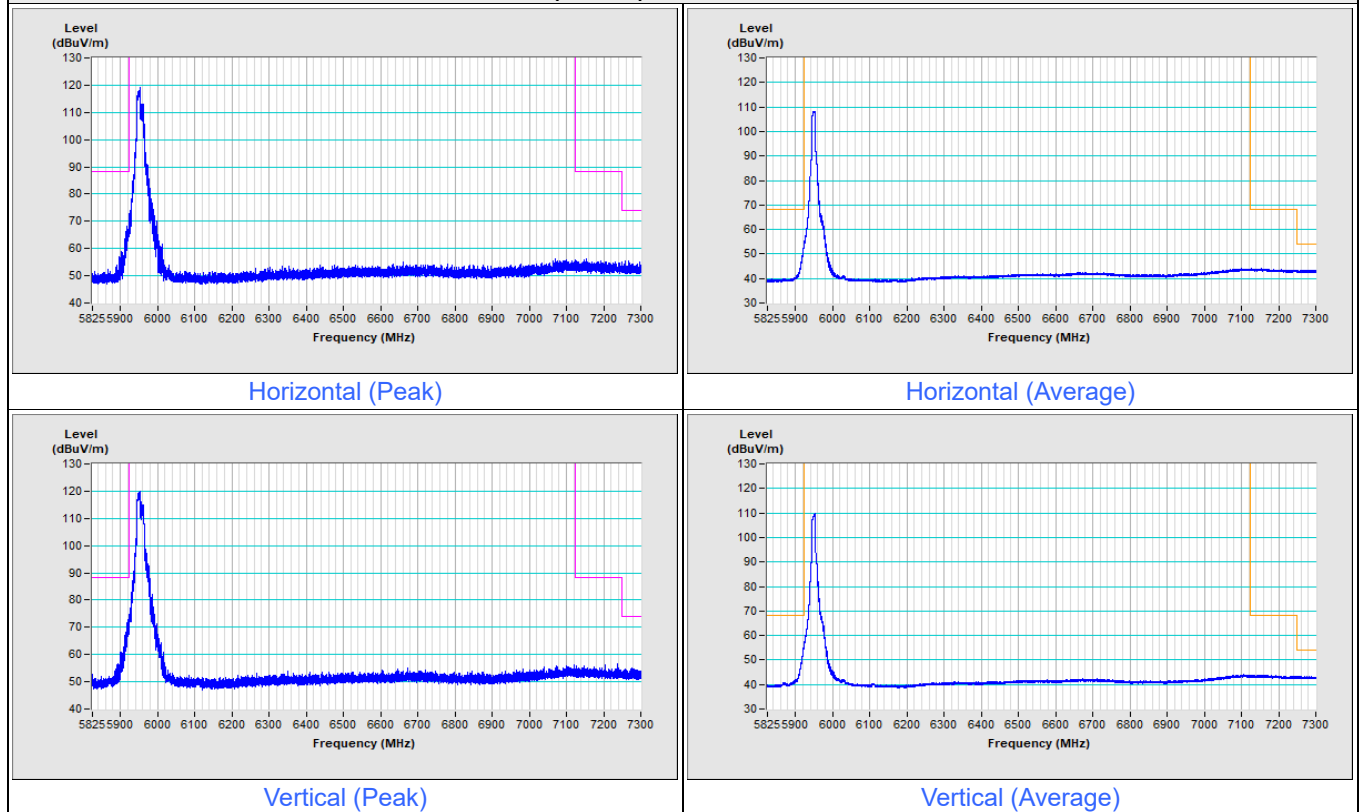

802.11be (EHT20) 106-tone RU Channel 233

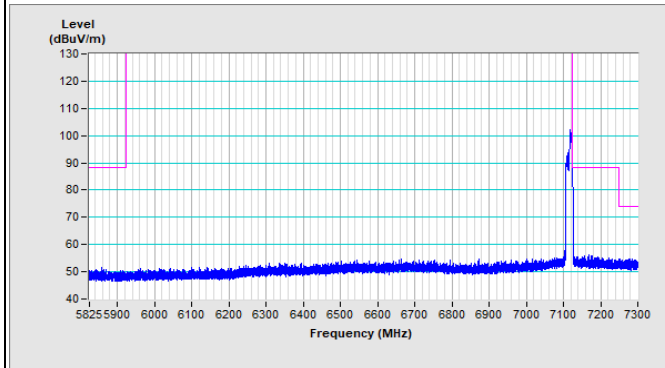


Horizontal (Peak)

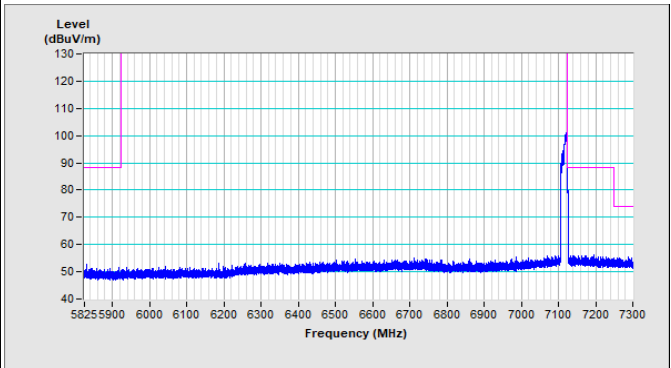


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

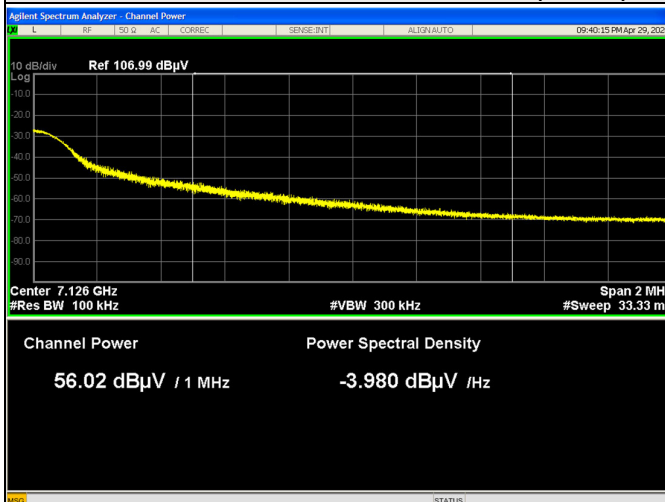


Horizontal (Average)

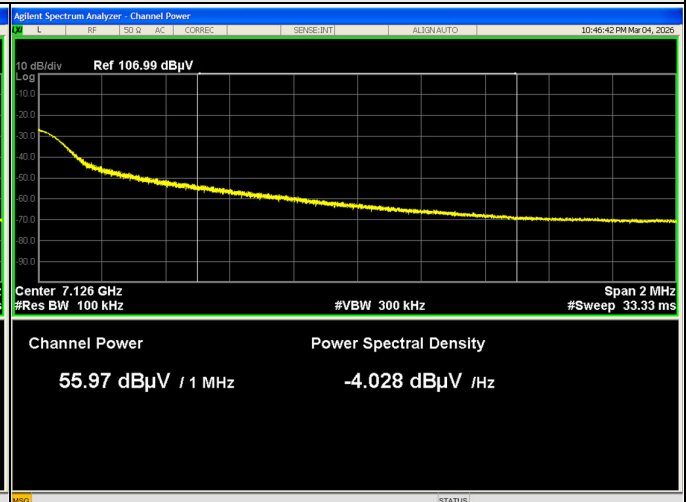


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

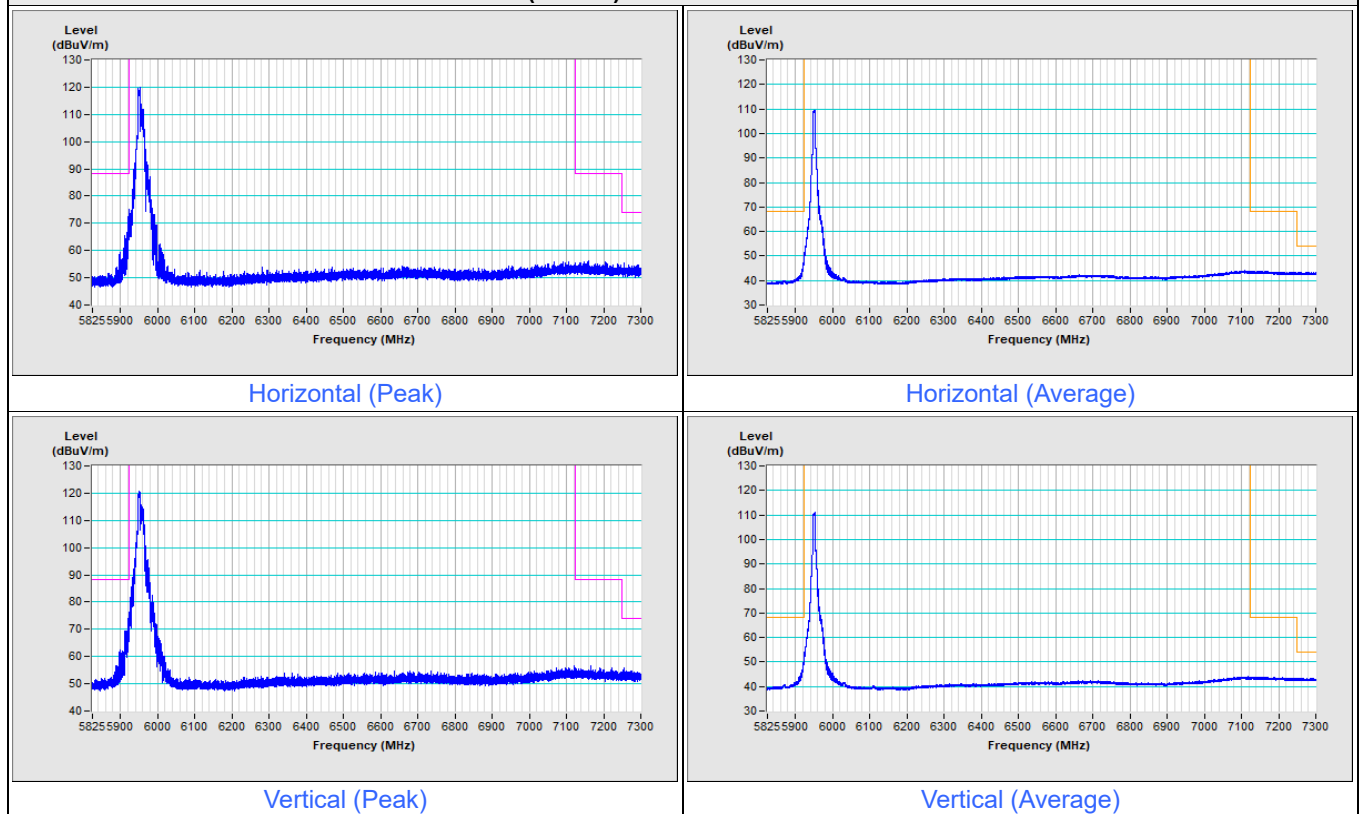


802.11be (EHT20) 52+26-tone MRU Channel 233

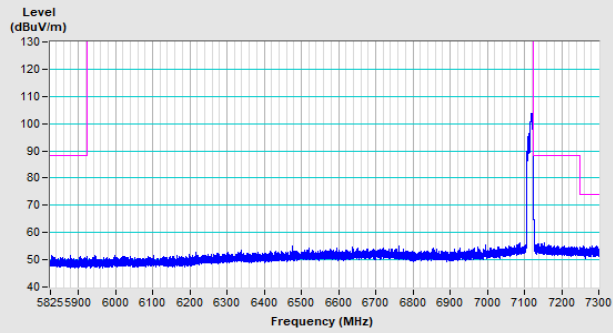


Horizontal (Peak)

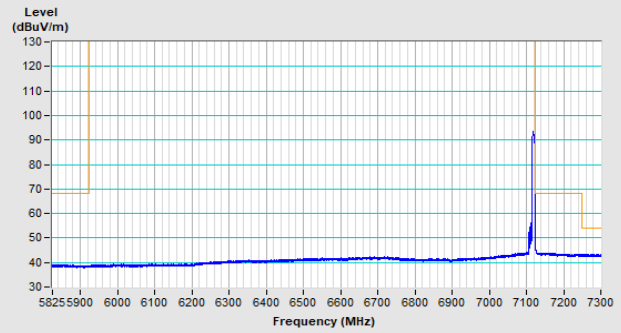

Horizontal (Average)

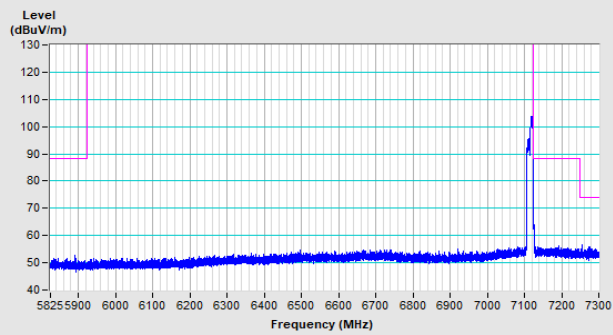


Vertical (Peak)

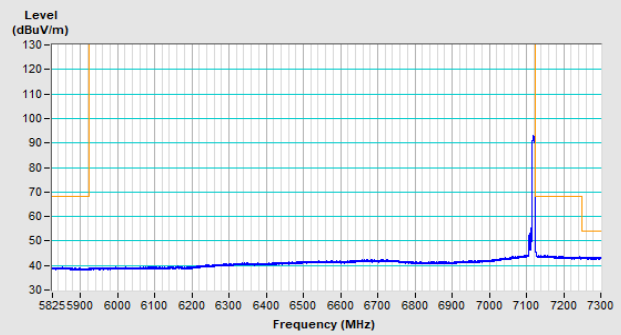


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

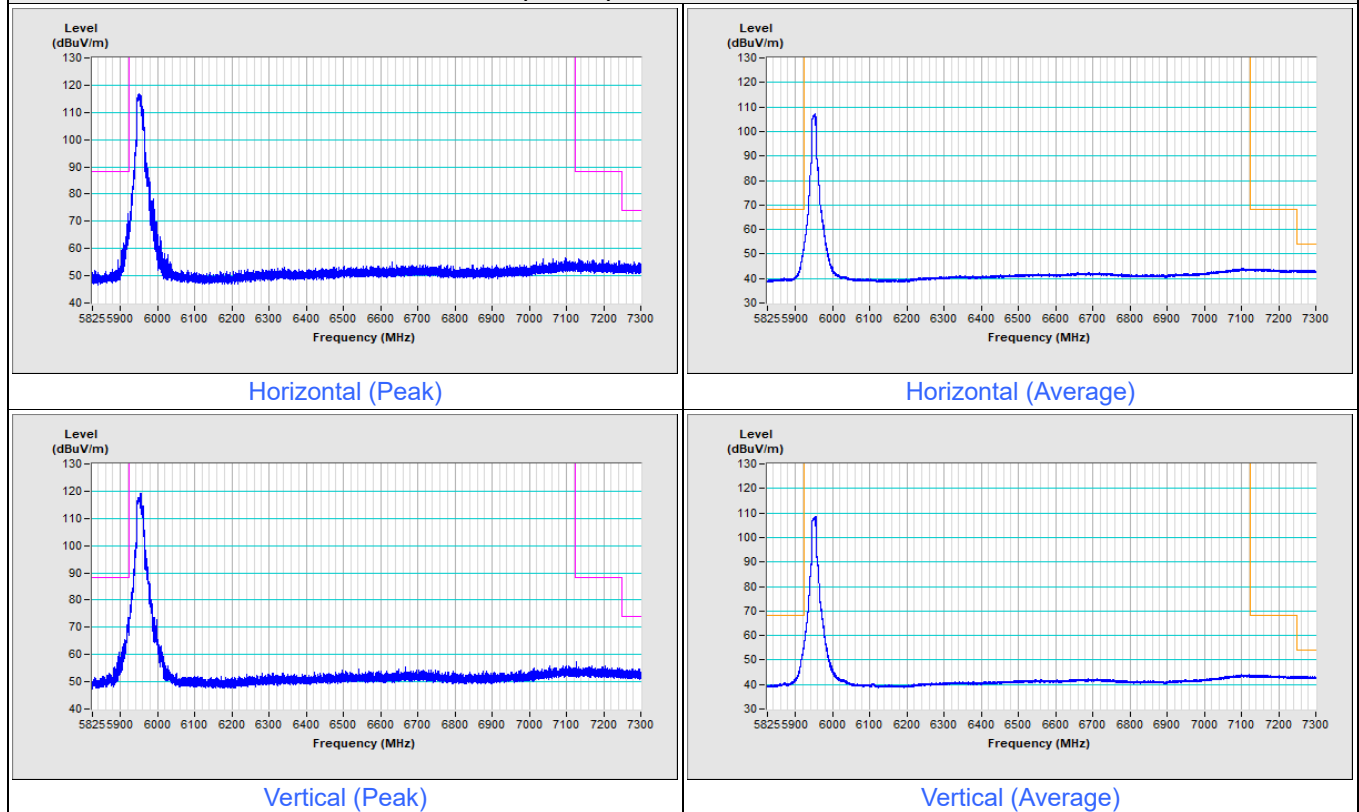

802.11be (EHT20) 106+26-tone MRU Channel 233

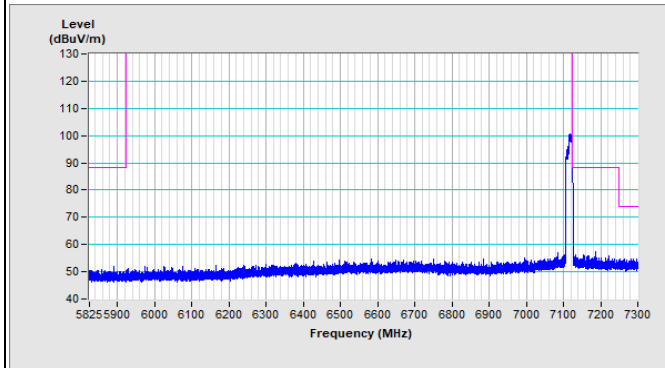

Horizontal (Peak)

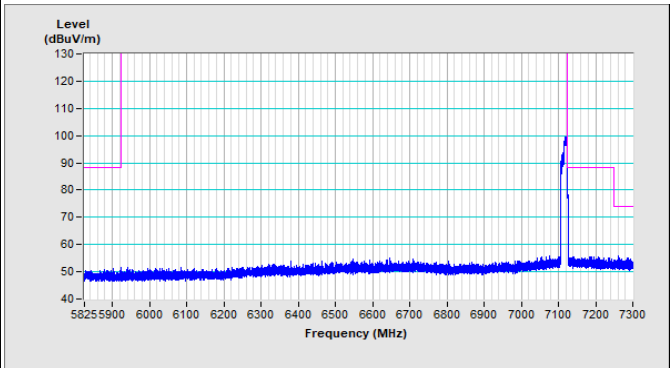


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233




Horizontal (Average)

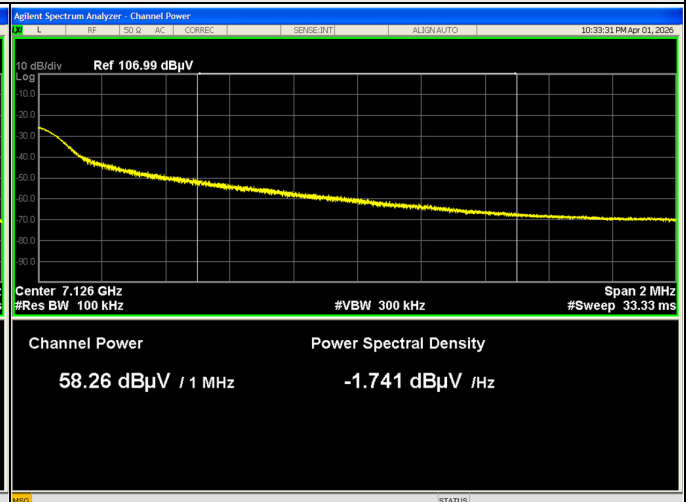


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

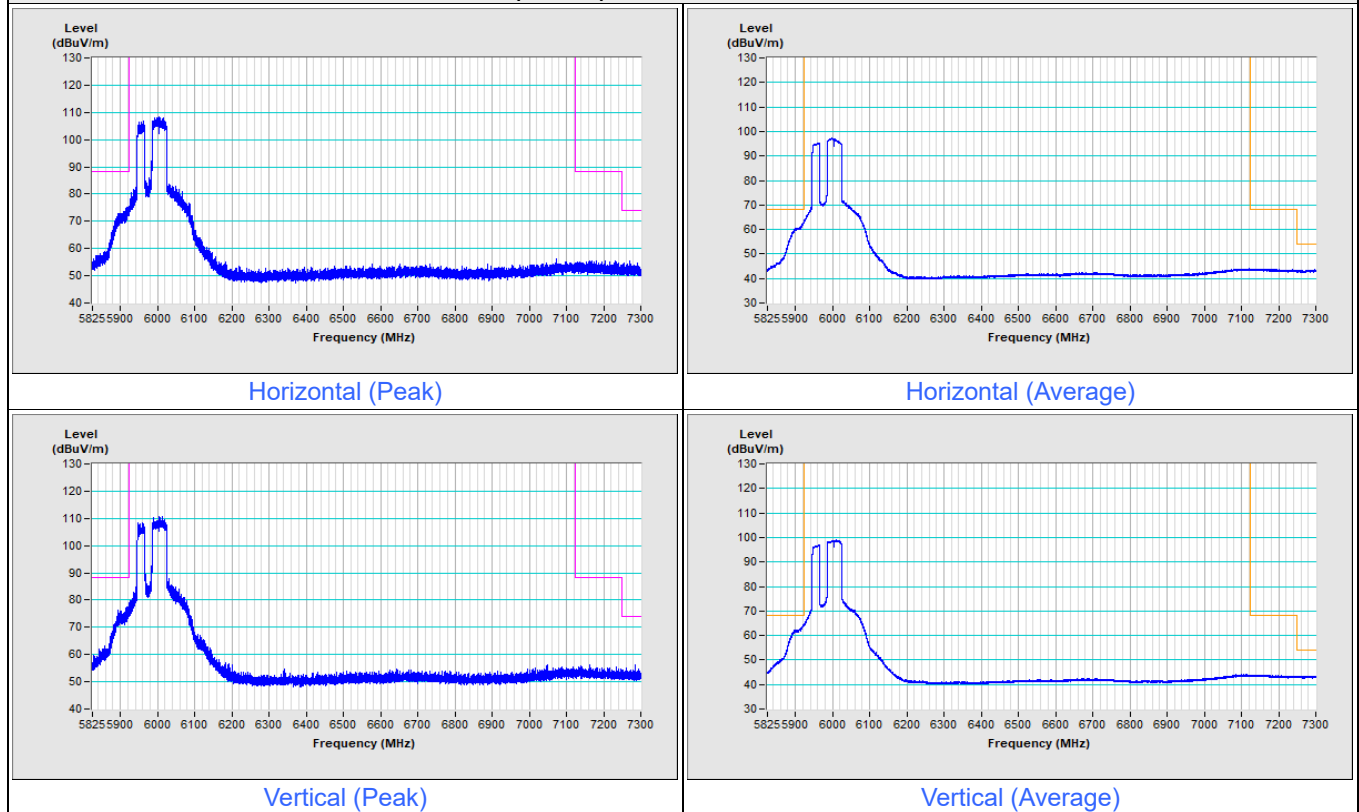


802.11be (EHT80) 484+242-tone MRU Channel 215

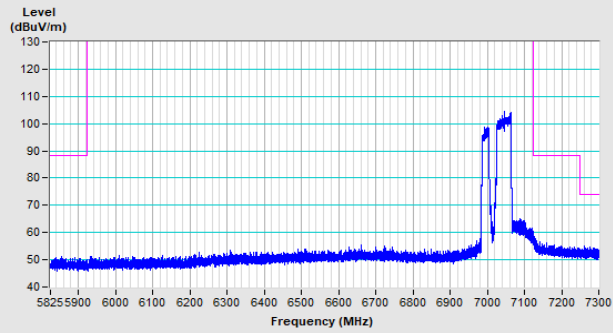


Horizontal (Peak)

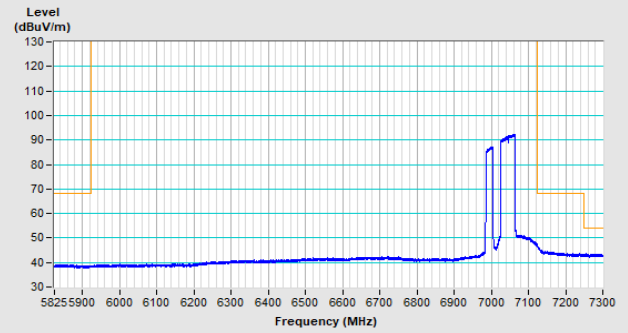

Horizontal (Average)

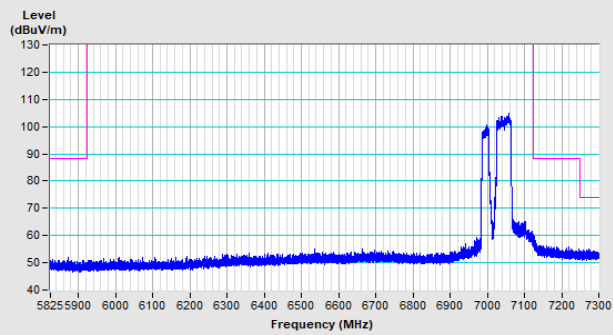


Vertical (Peak)

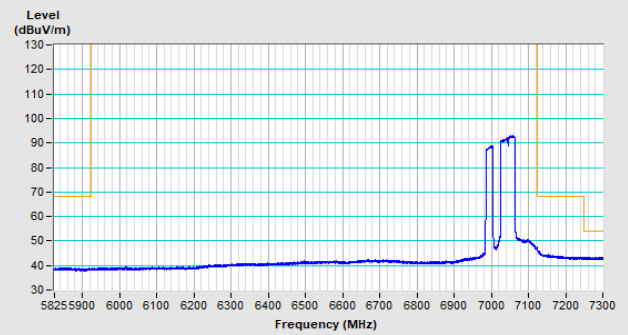


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

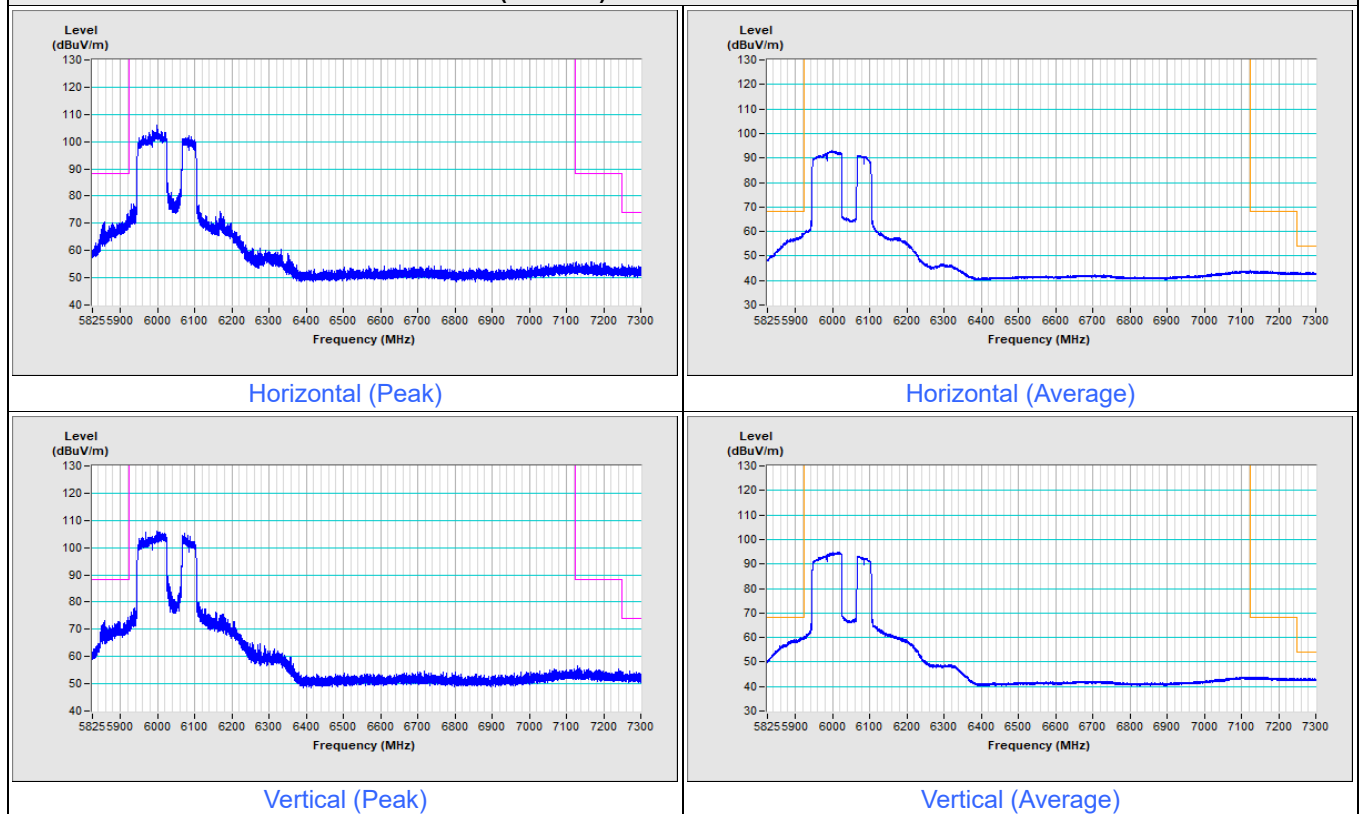


802.11be (EHT160) 996+484-tone MRU Channel 207

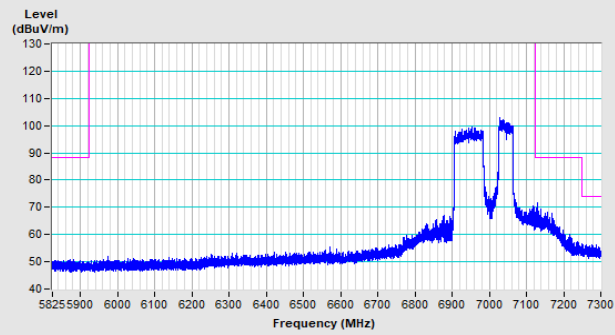


Horizontal (Peak)

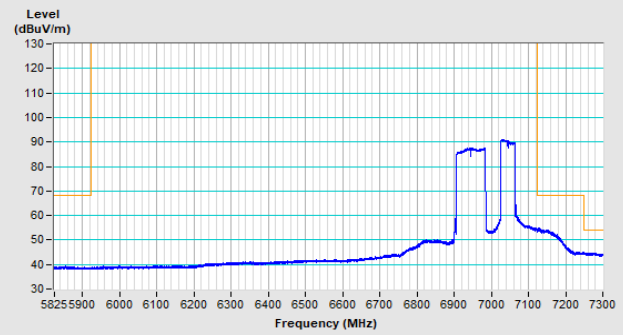

Horizontal (Average)

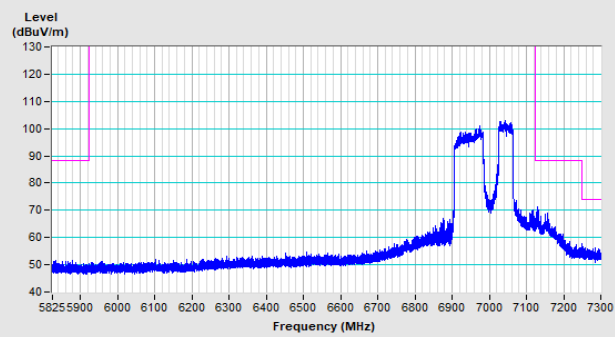


Vertical (Peak)

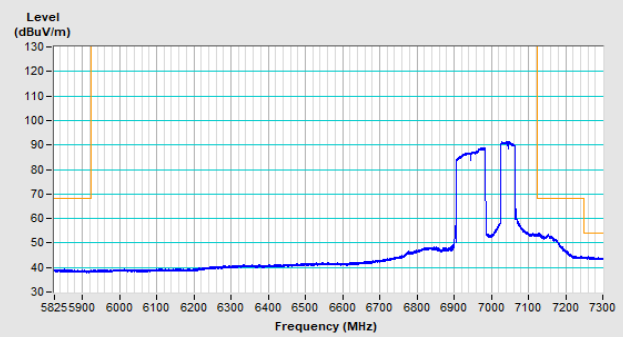


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

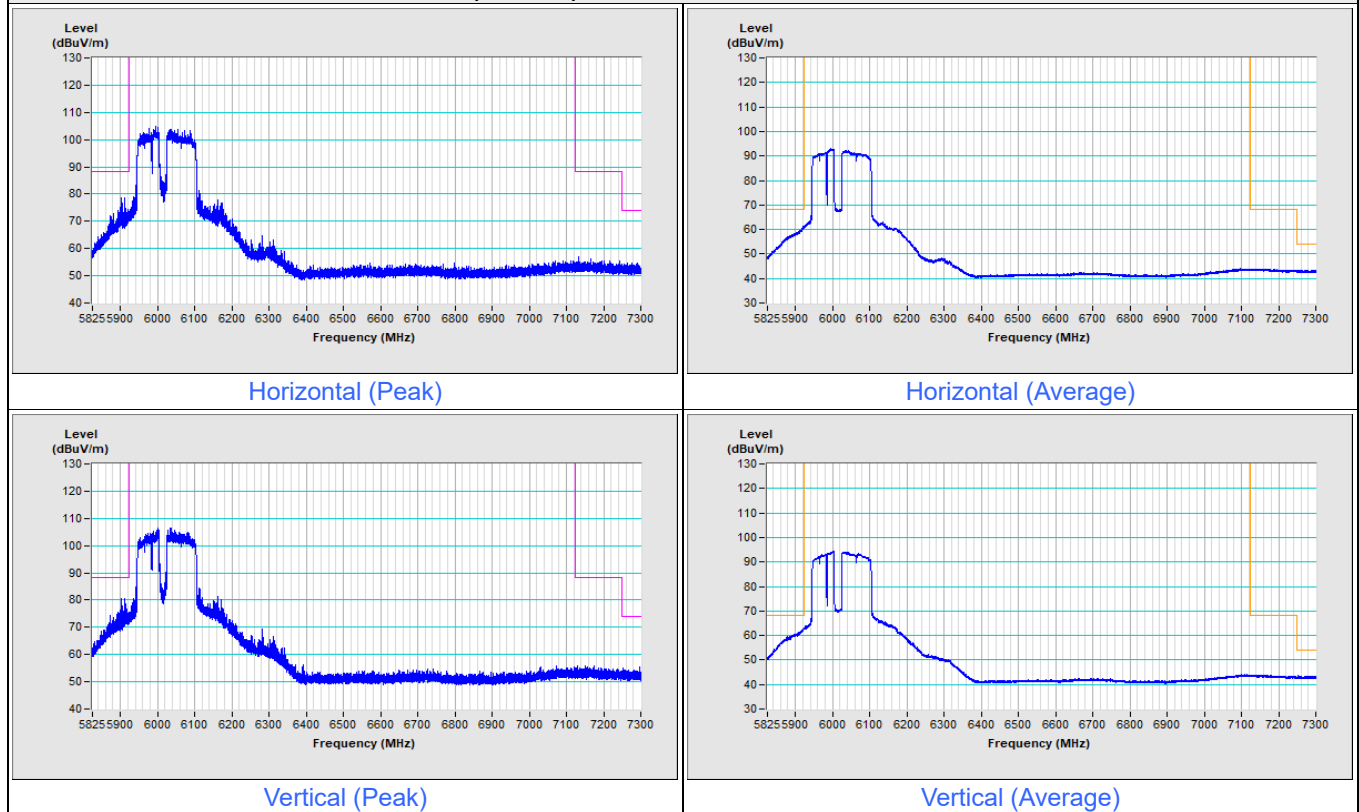


802.11be (EHT160) 996+484+242-tone MRU Channel 207

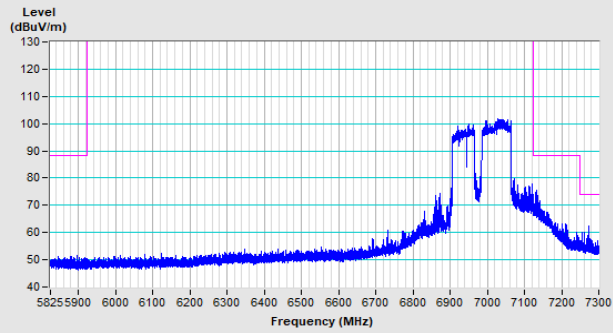


Horizontal (Peak)

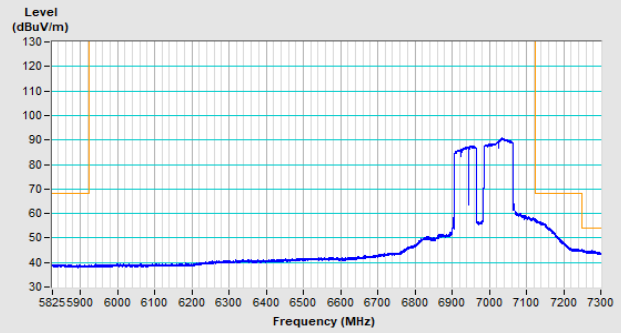

Horizontal (Average)

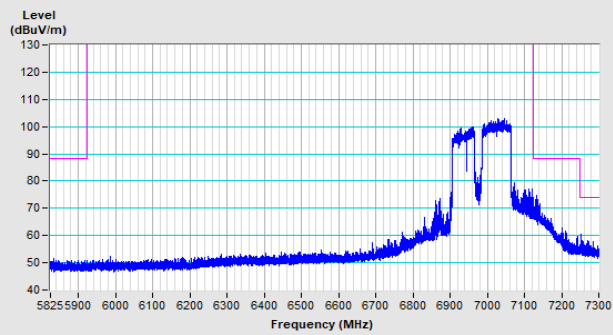

Vertical (Peak)

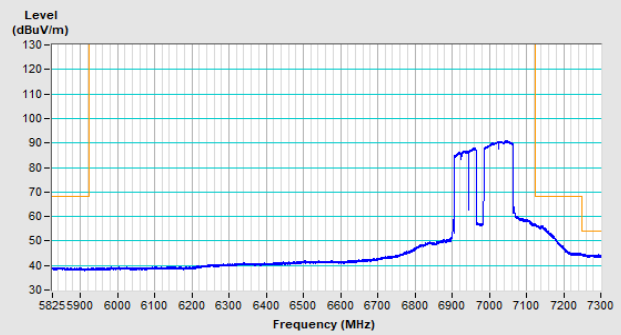

Vertical (Average)

Mode A
2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	2.24 H	128	58.9	4.3
2	#5925.00	48.3 AV	68.2	-19.9	2.24 H	128	44.0	4.3
3	*5955.00	115.5 PK			2.24 H	128	111.0	4.5
4	*5955.00	106.5 AV			2.24 H	128	102.0	4.5
5	11910.00	60.1 PK	74.0	-13.9	3.91 H	347	47.9	12.2
6	11910.00	50.6 AV	54.0	-3.4	3.91 H	347	38.4	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.68 H	56	35.3	21.9
8	17865.00	45.6 AV	54.0	-8.4	3.68 H	56	23.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	1.60 V	200	63.7	4.3
2	#5925.00	52.8 AV	68.2	-15.4	1.60 V	200	48.5	4.3
3	*5955.00	116.1 PK			1.60 V	200	111.6	4.5
4	*5955.00	107.1 AV			1.60 V	200	102.6	4.5
5	11910.00	59.7 PK	74.0	-14.3	2.47 V	54	47.5	12.2
6	11910.00	49.6 AV	54.0	-4.4	2.47 V	54	37.4	12.2
7	17865.00	57.1 PK	74.0	-16.9	1.54 V	311	35.2	21.9
8	17865.00	45.3 AV	54.0	-8.7	1.54 V	311	23.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.3 PK			2.27 H	129	110.5	4.8
2	*6195.00	106.4 AV			2.27 H	129	101.6	4.8
3	12390.00	59.7 PK	74.0	-14.3	3.94 H	353	47.4	12.3
4	12390.00	50.5 AV	54.0	-3.5	3.94 H	353	38.2	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.63 H	67	62.4	-5.0
6	18585.00	46.0 AV	54.0	-8.0	3.63 H	67	51.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.0 PK			2.09 V	148	111.2	4.8
2	*6195.00	107.0 AV			2.09 V	148	102.2	4.8
3	12390.00	59.9 PK	74.0	-14.1	2.41 V	67	47.6	12.3
4	12390.00	49.9 AV	54.0	-4.1	2.41 V	67	37.6	12.3
5	18585.00	57.4 PK	74.0	-16.6	1.55 V	313	62.4	-5.0
6	18585.00	45.8 AV	54.0	-8.2	1.55 V	313	50.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.2 PK			2.28 H	112	108.8	6.4
2	*6415.00	106.1 AV			2.28 H	112	99.7	6.4
3	#12830.00	59.6 PK	88.2	-28.6	3.94 H	347	46.6	13.0
4	#12830.00	50.2 AV	68.2	-18.0	3.94 H	347	37.2	13.0
5	19245.00	56.8 PK	74.0	-17.2	3.66 H	70	60.6	-3.8
6	19245.00	45.4 AV	54.0	-8.6	3.66 H	70	49.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	116.1 PK			1.63 V	193	109.7	6.4
2	*6415.00	107.2 AV			1.63 V	193	100.8	6.4
3	#12830.00	59.6 PK	88.2	-28.6	2.41 V	50	46.6	13.0
4	#12830.00	49.5 AV	68.2	-18.7	2.41 V	50	36.5	13.0
5	19245.00	57.3 PK	74.0	-16.7	1.54 V	300	61.1	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.54 V	300	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.8 PK			2.44 H	111	92.4	6.4
2	*6435.00	91.0 AV			2.44 H	111	84.6	6.4
3	#12870.00	59.5 PK	88.2	-28.7	3.93 H	347	46.5	13.0
4	#12870.00	50.1 AV	68.2	-18.1	3.93 H	347	37.1	13.0
5	19305.00	57.2 PK	74.0	-16.8	3.65 H	54	60.9	-3.7
6	19305.00	46.0 AV	54.0	-8.0	3.65 H	54	49.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.8 PK			1.87 V	185	93.4	6.4
2	*6435.00	91.3 AV			1.87 V	185	84.9	6.4
3	#12870.00	59.4 PK	88.2	-28.8	2.46 V	75	46.4	13.0
4	#12870.00	49.4 AV	68.2	-18.8	2.46 V	75	36.4	13.0
5	19305.00	57.8 PK	74.0	-16.2	1.55 V	326	61.5	-3.7
6	19305.00	45.9 AV	54.0	-8.1	1.55 V	326	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.9 PK			2.27 H	119	108.3	6.6
2	*6475.00	106.2 AV			2.27 H	119	99.6	6.6
3	#12950.00	59.6 PK	88.2	-28.6	3.85 H	351	46.5	13.1
4	#12950.00	50.3 AV	68.2	-17.9	3.85 H	351	37.2	13.1
5	19425.00	57.4 PK	74.0	-16.6	3.63 H	49	61.2	-3.8
6	19425.00	45.6 AV	54.0	-8.4	3.63 H	49	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.2 PK			1.61 V	205	109.6	6.6
2	*6475.00	107.3 AV			1.61 V	205	100.7	6.6
3	#12950.00	59.5 PK	88.2	-28.7	2.53 V	55	46.4	13.1
4	#12950.00	49.4 AV	68.2	-18.8	2.53 V	55	36.3	13.1
5	19425.00	57.1 PK	74.0	-16.9	1.58 V	314	60.9	-3.8
6	19425.00	45.4 AV	54.0	-8.6	1.58 V	314	49.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	99.4 PK			2.50 H	128	92.5	6.9
2	*6515.00	91.6 AV			2.50 H	128	84.7	6.9
3	#13030.00	59.3 PK	88.2	-28.9	3.99 H	347	46.1	13.2
4	#13030.00	50.1 AV	68.2	-18.1	3.99 H	347	36.9	13.2
5	19545.00	57.8 PK	74.0	-16.2	3.70 H	47	61.9	-4.1
6	19545.00	46.3 AV	54.0	-7.7	3.70 H	47	50.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.0 PK			1.99 V	181	93.1	6.9
2	*6515.00	91.8 AV			1.99 V	181	84.9	6.9
3	#13030.00	59.7 PK	88.2	-28.5	2.43 V	62	46.5	13.2
4	#13030.00	49.4 AV	68.2	-18.8	2.43 V	62	36.2	13.2
5	19545.00	57.2 PK	74.0	-16.8	1.59 V	329	61.3	-4.1
6	19545.00	45.5 AV	54.0	-8.5	1.59 V	329	49.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	115.6 PK			2.19 H	133	108.7	6.9
2	*6535.00	106.5 AV			2.19 H	133	99.6	6.9
3	#13070.00	60.3 PK	88.2	-27.9	3.86 H	360	47.1	13.2
4	#13070.00	50.9 AV	68.2	-17.3	3.86 H	360	37.7	13.2
5	19605.00	56.9 PK	74.0	-17.1	3.70 H	68	60.9	-4.0
6	19605.00	45.5 AV	54.0	-8.5	3.70 H	68	49.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.5 PK			1.59 V	204	109.6	6.9
2	*6535.00	107.2 AV			1.59 V	204	100.3	6.9
3	#13070.00	59.6 PK	88.2	-28.6	2.44 V	67	46.4	13.2
4	#13070.00	49.2 AV	68.2	-19.0	2.44 V	67	36.0	13.2
5	19605.00	57.3 PK	74.0	-16.7	1.55 V	302	61.3	-4.0
6	19605.00	45.4 AV	54.0	-8.6	1.55 V	302	49.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.2 PK			2.25 H	113	108.0	7.2
2	*6695.00	106.4 AV			2.25 H	113	99.2	7.2
3	13390.00	59.9 PK	74.0	-14.1	3.97 H	346	45.9	14.0
4	13390.00	50.3 AV	54.0	-3.7	3.97 H	346	36.3	14.0
5	20085.00	57.1 PK	74.0	-16.9	3.64 H	45	60.6	-3.5
6	20085.00	45.6 AV	54.0	-8.4	3.64 H	45	49.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.8 PK			1.62 V	191	109.6	7.2
2	*6695.00	107.6 AV			1.62 V	191	100.4	7.2
3	13390.00	59.9 PK	74.0	-14.1	2.52 V	59	45.9	14.0
4	13390.00	49.6 AV	54.0	-4.4	2.52 V	59	35.6	14.0
5	20085.00	57.4 PK	74.0	-16.6	1.55 V	311	60.9	-3.5
6	20085.00	45.5 AV	54.0	-8.5	1.55 V	311	49.0	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.8 PK			2.28 H	124	108.6	7.2
2	*6855.00	106.6 AV			2.28 H	124	99.4	7.2
3	#13710.00	60.2 PK	88.2	-28.0	3.96 H	354	45.0	15.2
4	#13710.00	50.7 AV	68.2	-17.5	3.96 H	354	35.5	15.2
5	20565.00	57.0 PK	74.0	-17.0	3.66 H	50	60.3	-3.3
6	20565.00	45.5 AV	54.0	-8.5	3.66 H	50	48.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.9 PK			1.57 V	212	108.7	7.2
2	*6855.00	106.9 AV			1.57 V	212	99.7	7.2
3	#13710.00	60.3 PK	88.2	-27.9	2.41 V	58	45.1	15.2
4	#13710.00	49.9 AV	68.2	-18.3	2.41 V	58	34.7	15.2
5	20565.00	57.3 PK	74.0	-16.7	1.54 V	301	60.6	-3.3
6	20565.00	45.7 AV	54.0	-8.3	1.54 V	301	49.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.0 PK			2.45 H	141	91.8	7.2
2	*6875.00	91.2 AV			2.45 H	141	84.0	7.2
3	#13750.00	59.9 PK	88.2	-28.3	3.96 H	358	44.8	15.1
4	#13750.00	50.4 AV	68.2	-17.8	3.96 H	358	35.3	15.1
5	20625.00	56.6 PK	74.0	-17.4	3.62 H	68	59.9	-3.3
6	20625.00	45.6 AV	54.0	-8.4	3.62 H	68	48.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.6 PK			2.01 V	174	92.4	7.2
2	*6875.00	91.4 AV			2.01 V	174	84.2	7.2
3	#13750.00	59.0 PK	88.2	-29.2	2.52 V	85	43.9	15.1
4	#13750.00	49.2 AV	68.2	-19.0	2.52 V	85	34.1	15.1
5	20625.00	57.4 PK	74.0	-16.6	1.50 V	312	60.7	-3.3
6	20625.00	45.6 AV	54.0	-8.4	1.50 V	312	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.4 PK			2.46 H	121	91.4	8.0
2	*6995.00	91.4 AV			2.46 H	121	83.4	8.0
3	#13990.00	59.2 PK	88.2	-29.0	3.98 H	356	43.6	15.6
4	#13990.00	49.7 AV	68.2	-18.5	3.98 H	356	34.1	15.6
5	20985.00	57.1 PK	74.0	-16.9	3.66 H	63	59.9	-2.8
6	20985.00	46.1 AV	54.0	-7.9	3.66 H	63	48.9	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.4 PK			1.35 V	190	91.4	8.0
2	*6995.00	91.2 AV			1.35 V	190	83.2	8.0
3	#13990.00	59.3 PK	88.2	-28.9	2.49 V	75	43.7	15.6
4	#13990.00	49.1 AV	68.2	-19.1	2.49 V	75	33.5	15.6
5	20985.00	57.8 PK	74.0	-16.2	1.50 V	331	60.6	-2.8
6	20985.00	46.0 AV	54.0	-8.0	1.50 V	331	48.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.5 PK			2.49 H	125	90.0	9.5
2	*7115.00	91.5 AV			2.49 H	125	82.0	9.5
3	#7125.00	65.6 PK	88.2	-22.6	2.49 H	125	56.2	9.4
4	#7125.00	46.7 AV	68.2	-21.5	2.49 H	125	37.3	9.4
5	7250.00	54.5 PK	74.0	-19.5	2.49 H	125	45.8	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.49 H	125	34.6	8.7
7	#14230.00	59.4 PK	88.2	-28.8	3.97 H	340	44.1	15.3
8	#14230.00	50.2 AV	68.2	-18.0	3.97 H	340	34.9	15.3
9	21345.00	57.3 PK	74.0	-16.7	3.64 H	48	58.9	-1.6
10	21345.00	46.1 AV	54.0	-7.9	3.64 H	48	47.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.6 PK			1.30 V	201	90.1	9.5
2	*7115.00	91.5 AV			1.30 V	201	82.0	9.5
3	#7125.00	72.1 PK	88.2	-16.1	1.30 V	201	62.7	9.4
4	#7125.00	51.3 AV	68.2	-16.9	1.30 V	201	41.9	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.30 V	201	46.0	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.30 V	201	34.7	8.7
7	#14230.00	59.2 PK	88.2	-29.0	2.45 V	64	43.9	15.3
8	#14230.00	49.0 AV	68.2	-19.2	2.45 V	64	33.7	15.3
9	21345.00	57.8 PK	74.0	-16.2	1.54 V	337	59.4	-1.6
10	21345.00	46.2 AV	54.0	-7.8	1.54 V	337	47.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.4 PK	88.2	-20.8	2.25 H	128	63.1	4.3
2	#5925.00	57.4 AV	68.2	-10.8	2.25 H	128	53.1	4.3
3	*5955.00	116.5 PK			2.25 H	128	112.0	4.5
4	*5955.00	105.6 AV			2.25 H	128	101.1	4.5
5	11910.00	59.8 PK	74.0	-14.2	3.85 H	355	47.6	12.2
6	11910.00	50.4 AV	54.0	-3.6	3.85 H	355	38.2	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.69 H	51	35.4	21.9
8	17865.00	45.7 AV	54.0	-8.3	3.69 H	51	23.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.0 PK	88.2	-12.2	1.60 V	201	71.7	4.3
2	#5925.00	61.2 AV	68.2	-7.0	1.60 V	201	56.9	4.3
3	*5955.00	117.2 PK			1.60 V	201	112.7	4.5
4	*5955.00	106.2 AV			1.60 V	201	101.7	4.5
5	11910.00	59.7 PK	74.0	-14.3	2.42 V	39	47.5	12.2
6	11910.00	49.5 AV	54.0	-4.5	2.42 V	39	37.3	12.2
7	17865.00	57.7 PK	74.0	-16.3	1.55 V	322	35.8	21.9
8	17865.00	45.6 AV	54.0	-8.4	1.55 V	322	23.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.9 PK			2.25 H	120	111.1	4.8
2	*6195.00	105.2 AV			2.25 H	120	100.4	4.8
3	12390.00	60.1 PK	74.0	-13.9	3.91 H	339	47.8	12.3
4	12390.00	50.7 AV	54.0	-3.3	3.91 H	339	38.4	12.3
5	18585.00	57.3 PK	74.0	-16.7	3.63 H	63	62.3	-5.0
6	18585.00	45.5 AV	54.0	-8.5	3.63 H	63	50.5	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.7 PK			2.07 V	128	111.9	4.8
2	*6195.00	105.8 AV			2.07 V	128	101.0	4.8
3	12390.00	59.8 PK	74.0	-14.2	2.49 V	67	47.5	12.3
4	12390.00	49.9 AV	54.0	-4.1	2.49 V	67	37.6	12.3
5	18585.00	57.2 PK	74.0	-16.8	1.54 V	302	62.2	-5.0
6	18585.00	45.2 AV	54.0	-8.8	1.54 V	302	50.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.0 PK			2.24 H	113	110.6	6.4
2	*6415.00	106.1 AV			2.24 H	113	99.7	6.4
3	#12830.00	59.9 PK	88.2	-28.3	3.96 H	346	46.9	13.0
4	#12830.00	50.3 AV	68.2	-17.9	3.96 H	346	37.3	13.0
5	19245.00	57.4 PK	74.0	-16.6	3.68 H	56	61.2	-3.8
6	19245.00	45.6 AV	54.0	-8.4	3.68 H	56	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.4 PK			1.55 V	190	111.0	6.4
2	*6415.00	106.4 AV			1.55 V	190	100.0	6.4
3	#12830.00	59.9 PK	88.2	-28.3	2.41 V	65	46.9	13.0
4	#12830.00	49.6 AV	68.2	-18.6	2.41 V	65	36.6	13.0
5	19245.00	56.9 PK	74.0	-17.1	1.60 V	318	60.7	-3.8
6	19245.00	45.3 AV	54.0	-8.7	1.60 V	318	49.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.5 PK			3.01 H	228	96.1	6.4
2	*6435.00	90.7 AV			3.01 H	228	84.3	6.4
3	#12870.00	59.3 PK	88.2	-28.9	3.96 H	340	46.3	13.0
4	#12870.00	49.9 AV	68.2	-18.3	3.96 H	340	36.9	13.0
5	19305.00	57.6 PK	74.0	-16.4	3.64 H	40	61.3	-3.7
6	19305.00	46.4 AV	54.0	-7.6	3.64 H	40	50.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.2 PK			1.83 V	166	97.8	6.4
2	*6435.00	92.8 AV			1.83 V	166	86.4	6.4
3	#12870.00	59.8 PK	88.2	-28.4	2.49 V	63	46.8	13.0
4	#12870.00	49.8 AV	68.2	-18.4	2.49 V	63	36.8	13.0
5	19305.00	57.3 PK	74.0	-16.7	1.57 V	310	61.0	-3.7
6	19305.00	45.5 AV	54.0	-8.5	1.57 V	310	49.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.7 PK			2.28 H	128	109.1	6.6
2	*6475.00	105.1 AV			2.28 H	128	98.5	6.6
3	#12950.00	60.5 PK	88.2	-27.7	3.94 H	339	47.4	13.1
4	#12950.00	50.3 AV	68.2	-17.9	3.94 H	339	37.2	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.66 H	62	60.5	-3.8
6	19425.00	45.2 AV	54.0	-8.8	3.66 H	62	49.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	116.6 PK			1.62 V	187	110.0	6.6
2	*6475.00	105.9 AV			1.62 V	187	99.3	6.6
3	#12950.00	59.4 PK	88.2	-28.8	2.49 V	45	46.3	13.1
4	#12950.00	49.4 AV	68.2	-18.8	2.49 V	45	36.3	13.1
5	19425.00	57.3 PK	74.0	-16.7	1.54 V	312	61.1	-3.8
6	19425.00	45.2 AV	54.0	-8.8	1.54 V	312	49.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.0 PK			3.02 H	238	96.1	6.9
2	*6515.00	91.2 AV			3.02 H	238	84.3	6.9
3	#13030.00	59.5 PK	88.2	-28.7	3.93 H	356	46.3	13.2
4	#13030.00	50.0 AV	68.2	-18.2	3.93 H	356	36.8	13.2
5	19545.00	57.5 PK	74.0	-16.5	3.60 H	52	61.6	-4.1
6	19545.00	46.2 AV	54.0	-7.8	3.60 H	52	50.3	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.0 PK			1.81 V	184	97.1	6.9
2	*6515.00	92.9 AV			1.81 V	184	86.0	6.9
3	#13030.00	58.9 PK	88.2	-29.3	2.48 V	87	45.7	13.2
4	#13030.00	49.1 AV	68.2	-19.1	2.48 V	87	35.9	13.2
5	19545.00	57.4 PK	74.0	-16.6	1.54 V	326	61.5	-4.1
6	19545.00	45.8 AV	54.0	-8.2	1.54 V	326	49.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.6 PK			2.22 H	124	109.7	6.9
2	*6535.00	105.7 AV			2.22 H	124	98.8	6.9
3	#13070.00	59.9 PK	88.2	-28.3	3.89 H	350	46.7	13.2
4	#13070.00	50.6 AV	68.2	-17.6	3.89 H	350	37.4	13.2
5	19605.00	57.5 PK	74.0	-16.5	3.68 H	57	61.5	-4.0
6	19605.00	46.1 AV	54.0	-7.9	3.68 H	57	50.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.2 PK			1.65 V	214	110.3	6.9
2	*6535.00	106.4 AV			1.65 V	214	99.5	6.9
3	#13070.00	59.5 PK	88.2	-28.7	2.49 V	42	46.3	13.2
4	#13070.00	49.2 AV	68.2	-19.0	2.49 V	42	36.0	13.2
5	19605.00	57.4 PK	74.0	-16.6	1.49 V	323	61.4	-4.0
6	19605.00	45.5 AV	54.0	-8.5	1.49 V	323	49.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.7 PK			2.21 H	133	109.5	7.2
2	*6695.00	105.7 AV			2.21 H	133	98.5	7.2
3	13390.00	60.5 PK	74.0	-13.5	3.88 H	339	46.5	14.0
4	13390.00	50.5 AV	54.0	-3.5	3.88 H	339	36.5	14.0
5	20085.00	57.7 PK	74.0	-16.3	3.65 H	50	61.2	-3.5
6	20085.00	45.8 AV	54.0	-8.2	3.65 H	50	49.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.2 PK			1.62 V	221	110.0	7.2
2	*6695.00	106.6 AV			1.62 V	221	99.4	7.2
3	13390.00	59.5 PK	74.0	-14.5	2.49 V	64	45.5	14.0
4	13390.00	49.5 AV	54.0	-4.5	2.49 V	64	35.5	14.0
5	20085.00	56.9 PK	74.0	-17.1	1.58 V	298	60.4	-3.5
6	20085.00	45.3 AV	54.0	-8.7	1.58 V	298	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.4 PK			2.23 H	140	109.2	7.2
2	*6855.00	105.7 AV			2.23 H	140	98.5	7.2
3	#13710.00	59.9 PK	88.2	-28.3	3.85 H	352	44.7	15.2
4	#13710.00	50.3 AV	68.2	-17.9	3.85 H	352	35.1	15.2
5	20565.00	57.2 PK	74.0	-16.8	3.72 H	43	60.5	-3.3
6	20565.00	45.8 AV	54.0	-8.2	3.72 H	43	49.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	116.9 PK			2.06 V	129	109.7	7.2
2	*6855.00	105.9 AV			2.06 V	129	98.7	7.2
3	#13710.00	60.4 PK	88.2	-27.8	2.47 V	44	45.2	15.2
4	#13710.00	50.0 AV	68.2	-18.2	2.47 V	44	34.8	15.2
5	20565.00	57.6 PK	74.0	-16.4	1.49 V	311	60.9	-3.3
6	20565.00	45.6 AV	54.0	-8.4	1.49 V	311	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			2.98 H	220	95.2	7.2
2	*6875.00	90.8 AV			2.98 H	220	83.6	7.2
3	#13750.00	59.1 PK	88.2	-29.1	3.98 H	341	44.0	15.1
4	#13750.00	49.8 AV	68.2	-18.4	3.98 H	341	34.7	15.1
5	20625.00	57.3 PK	74.0	-16.7	3.70 H	57	60.6	-3.3
6	20625.00	46.2 AV	54.0	-7.8	3.70 H	57	49.5	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.4 PK			1.81 V	170	97.2	7.2
2	*6875.00	93.4 AV			1.81 V	170	86.2	7.2
3	#13750.00	59.6 PK	88.2	-28.6	2.44 V	70	44.5	15.1
4	#13750.00	49.8 AV	68.2	-18.4	2.44 V	70	34.7	15.1
5	20625.00	57.3 PK	74.0	-16.7	1.60 V	333	60.6	-3.3
6	20625.00	45.7 AV	54.0	-8.3	1.60 V	333	49.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.2 PK			3.00 H	239	94.2	8.0
2	*6995.00	90.9 AV			3.00 H	239	82.9	8.0
3	#13990.00	59.9 PK	88.2	-28.3	3.92 H	357	44.3	15.6
4	#13990.00	50.5 AV	68.2	-17.7	3.92 H	357	34.9	15.6
5	20985.00	57.3 PK	74.0	-16.7	3.68 H	50	60.1	-2.8
6	20985.00	46.2 AV	54.0	-7.8	3.68 H	50	49.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.5 PK			1.84 V	192	95.5	8.0
2	*6995.00	92.5 AV			1.84 V	192	84.5	8.0
3	#13990.00	59.6 PK	88.2	-28.6	2.46 V	86	44.0	15.6
4	#13990.00	49.6 AV	68.2	-18.6	2.46 V	86	34.0	15.6
5	20985.00	57.9 PK	74.0	-16.1	1.54 V	333	60.7	-2.8
6	20985.00	46.0 AV	54.0	-8.0	1.54 V	333	48.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.5 PK			2.96 H	234	93.0	9.5
2	*7115.00	91.0 AV			2.96 H	234	81.5	9.5
3	#7125.00	84.3 PK	88.2	-3.9	2.96 H	234	74.9	9.4
4	#7125.00	63.6 AV	68.2	-4.6	2.96 H	234	54.2	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.96 H	234	46.5	8.7
6	7250.00	43.2 AV	54.0	-10.8	2.96 H	234	34.5	8.7
7	#14230.00	59.0 PK	88.2	-29.2	3.88 H	338	43.7	15.3
8	#14230.00	49.8 AV	68.2	-18.4	3.88 H	338	34.5	15.3
9	21345.00	57.4 PK	74.0	-16.6	3.65 H	56	59.0	-1.6
10	21345.00	46.2 AV	54.0	-7.8	3.65 H	56	47.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.2 PK			1.83 V	180	94.7	9.5
2	*7115.00	93.0 AV			1.83 V	180	83.5	9.5
3	#7125.00	86.3 PK	88.2	-1.9	1.83 V	180	76.9	9.4
4	#7125.00	66.3 AV	68.2	-1.9	1.83 V	180	56.9	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.83 V	180	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.83 V	180	34.7	8.7
7	#14230.00	59.1 PK	88.2	-29.1	2.42 V	87	43.8	15.3
8	#14230.00	49.1 AV	68.2	-19.1	2.42 V	87	33.8	15.3
9	21345.00	57.9 PK	74.0	-16.1	1.54 V	328	59.5	-1.6
10	21345.00	46.2 AV	54.0	-7.8	1.54 V	328	47.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	2.27 H	117	75.0	4.3
2	#5925.00	66.4 AV	68.2	-1.8	2.27 H	117	62.1	4.3
3	*5965.00	112.7 PK			2.27 H	117	108.3	4.4
4	*5965.00	100.7 AV			2.27 H	117	96.3	4.4
5	11930.00	60.3 PK	74.0	-13.7	3.83 H	351	48.2	12.1
6	11930.00	50.9 AV	54.0	-3.1	3.83 H	351	38.8	12.1
7	17895.00	57.1 PK	74.0	-16.9	3.72 H	56	34.8	22.3
8	17895.00	45.9 AV	54.0	-8.1	3.72 H	56	23.6	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	1.71 V	200	73.7	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.71 V	200	62.2	4.3
3	*5965.00	112.8 PK			1.71 V	200	108.4	4.4
4	*5965.00	101.5 AV			1.71 V	200	97.1	4.4
5	11930.00	59.6 PK	74.0	-14.4	2.44 V	62	47.5	12.1
6	11930.00	49.4 AV	54.0	-4.6	2.44 V	62	37.3	12.1
7	17895.00	57.2 PK	74.0	-16.8	1.59 V	326	34.9	22.3
8	17895.00	45.4 AV	54.0	-8.6	1.59 V	326	23.1	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.0 PK			2.30 H	101	109.1	4.9
2	*6205.00	102.7 AV			2.30 H	101	97.8	4.9
3	12410.00	59.9 PK	74.0	-14.1	3.94 H	360	47.6	12.3
4	12410.00	50.7 AV	54.0	-3.3	3.94 H	360	38.4	12.3
5	18615.00	57.2 PK	74.0	-16.8	3.66 H	45	62.1	-4.9
6	18615.00	45.8 AV	54.0	-8.2	3.66 H	45	50.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	114.2 PK			1.70 V	214	109.3	4.9
2	*6205.00	102.9 AV			1.70 V	214	98.0	4.9
3	12410.00	59.2 PK	74.0	-14.8	2.42 V	48	46.9	12.3
4	12410.00	49.2 AV	54.0	-4.8	2.42 V	48	36.9	12.3
5	18615.00	57.3 PK	74.0	-16.7	1.56 V	304	62.2	-4.9
6	18615.00	45.6 AV	54.0	-8.4	1.56 V	304	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.3 PK			2.28 H	106	107.9	6.4
2	*6405.00	103.0 AV			2.28 H	106	96.6	6.4
3	#12810.00	59.6 PK	88.2	-28.6	3.90 H	338	46.8	12.8
4	#12810.00	50.3 AV	68.2	-17.9	3.90 H	338	37.5	12.8
5	19215.00	57.9 PK	74.0	-16.1	3.65 H	50	61.6	-3.7
6	19215.00	46.4 AV	54.0	-7.6	3.65 H	50	50.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.5 PK			1.72 V	224	108.1	6.4
2	*6405.00	102.9 AV			1.72 V	224	96.5	6.4
3	#12810.00	60.0 PK	88.2	-28.2	2.42 V	62	47.2	12.8
4	#12810.00	49.6 AV	68.2	-18.6	2.42 V	62	36.8	12.8
5	19215.00	57.1 PK	74.0	-16.9	1.52 V	324	60.8	-3.7
6	19215.00	45.6 AV	54.0	-8.4	1.52 V	324	49.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.4 PK			2.49 H	122	96.0	6.4
2	*6445.00	91.1 AV			2.49 H	122	84.7	6.4
3	#12890.00	59.3 PK	88.2	-28.9	3.89 H	331	46.3	13.0
4	#12890.00	49.8 AV	68.2	-18.4	3.89 H	331	36.8	13.0
5	19335.00	56.9 PK	74.0	-17.1	3.61 H	53	60.6	-3.7
6	19335.00	45.8 AV	54.0	-8.2	3.61 H	53	49.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	104.6 PK			1.94 V	167	98.2	6.4
2	*6445.00	92.9 AV			1.94 V	167	86.5	6.4
3	#12890.00	59.5 PK	88.2	-28.7	2.44 V	85	46.5	13.0
4	#12890.00	49.3 AV	68.2	-18.9	2.44 V	85	36.3	13.0
5	19335.00	57.6 PK	74.0	-16.4	1.55 V	339	61.3	-3.7
6	19335.00	45.7 AV	54.0	-8.3	1.55 V	339	49.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.6 PK			2.32 H	113	106.9	6.7
2	*6485.00	102.4 AV			2.32 H	113	95.7	6.7
3	#12970.00	59.4 PK	88.2	-28.8	3.89 H	334	46.3	13.1
4	#12970.00	50.3 AV	68.2	-17.9	3.89 H	334	37.2	13.1
5	19455.00	57.8 PK	74.0	-16.2	3.65 H	44	61.7	-3.9
6	19455.00	46.5 AV	54.0	-7.5	3.65 H	44	50.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.0 PK			1.64 V	206	107.3	6.7
2	*6485.00	102.9 AV			1.64 V	206	96.2	6.7
3	#12970.00	59.8 PK	88.2	-28.4	2.42 V	69	46.7	13.1
4	#12970.00	49.3 AV	68.2	-18.9	2.42 V	69	36.2	13.1
5	19455.00	56.7 PK	74.0	-17.3	1.50 V	310	60.6	-3.9
6	19455.00	45.2 AV	54.0	-8.8	1.50 V	310	49.1	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.7 PK			2.49 H	115	95.8	6.9
2	*6525.00	91.1 AV			2.49 H	115	84.2	6.9
3	#13050.00	59.2 PK	88.2	-29.0	3.97 H	342	46.0	13.2
4	#13050.00	49.9 AV	68.2	-18.3	3.97 H	342	36.7	13.2
5	19575.00	57.0 PK	74.0	-17.0	3.69 H	44	61.1	-4.1
6	19575.00	46.1 AV	54.0	-7.9	3.69 H	44	50.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	104.0 PK			1.92 V	176	97.1	6.9
2	*6525.00	92.6 AV			1.92 V	176	85.7	6.9
3	#13050.00	59.2 PK	88.2	-29.0	2.52 V	85	46.0	13.2
4	#13050.00	49.5 AV	68.2	-18.7	2.52 V	85	36.3	13.2
5	19575.00	57.4 PK	74.0	-16.6	1.59 V	341	61.5	-4.1
6	19575.00	45.5 AV	54.0	-8.5	1.59 V	341	49.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.0 PK			2.27 H	104	107.1	6.9
2	*6565.00	102.9 AV			2.27 H	104	96.0	6.9
3	#13130.00	60.4 PK	88.2	-27.8	3.87 H	341	47.2	13.2
4	#13130.00	50.8 AV	68.2	-17.4	3.87 H	341	37.6	13.2
5	19695.00	58.0 PK	74.0	-16.0	3.63 H	51	61.9	-3.9
6	19695.00	46.6 AV	54.0	-7.4	3.63 H	51	50.5	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.3 PK			1.72 V	209	107.4	6.9
2	*6565.00	103.2 AV			1.72 V	209	96.3	6.9
3	#13130.00	60.6 PK	88.2	-27.6	2.44 V	60	47.4	13.2
4	#13130.00	50.0 AV	68.2	-18.2	2.44 V	60	36.8	13.2
5	19695.00	57.6 PK	74.0	-16.4	1.56 V	326	61.5	-3.9
6	19695.00	45.9 AV	54.0	-8.1	1.56 V	326	49.8	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	113.9 PK			2.32 H	91	106.7	7.2
2	*6685.00	102.7 AV			2.32 H	91	95.5	7.2
3	13370.00	59.9 PK	74.0	-14.1	3.90 H	337	45.9	14.0
4	13370.00	50.5 AV	54.0	-3.5	3.90 H	337	36.5	14.0
5	20055.00	57.6 PK	74.0	-16.4	3.72 H	60	61.1	-3.5
6	20055.00	46.0 AV	54.0	-8.0	3.72 H	60	49.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	114.1 PK			1.68 V	216	106.9	7.2
2	*6685.00	102.8 AV			1.68 V	216	95.6	7.2
3	13370.00	60.6 PK	74.0	-13.4	2.46 V	49	46.6	14.0
4	13370.00	50.0 AV	54.0	-4.0	2.46 V	49	36.0	14.0
5	20055.00	56.6 PK	74.0	-17.4	1.57 V	338	60.1	-3.5
6	20055.00	45.3 AV	54.0	-8.7	1.57 V	338	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.3 PK			2.29 H	91	107.2	7.1
2	*6845.00	103.1 AV			2.29 H	91	96.0	7.1
3	#13690.00	59.6 PK	88.2	-28.6	3.86 H	356	44.5	15.1
4	#13690.00	50.2 AV	68.2	-18.0	3.86 H	356	35.1	15.1
5	20535.00	57.4 PK	74.0	-16.6	3.72 H	43	60.6	-3.2
6	20535.00	45.8 AV	54.0	-8.2	3.72 H	43	49.0	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	114.3 PK			1.64 V	201	107.2	7.1
2	*6845.00	103.0 AV			1.64 V	201	95.9	7.1
3	#13690.00	60.6 PK	88.2	-27.6	2.42 V	66	45.5	15.1
4	#13690.00	50.0 AV	68.2	-18.2	2.42 V	66	34.9	15.1
5	20535.00	57.0 PK	74.0	-17.0	1.56 V	318	60.2	-3.2
6	20535.00	45.4 AV	54.0	-8.6	1.56 V	318	48.6	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	103.1 PK			2.44 H	140	95.9	7.2
2	*6885.00	91.6 AV			2.44 H	140	84.4	7.2
3	#13770.00	59.0 PK	88.2	-29.2	3.99 H	345	44.0	15.0
4	#13770.00	49.7 AV	68.2	-18.5	3.99 H	345	34.7	15.0
5	20655.00	57.3 PK	74.0	-16.7	3.69 H	66	60.6	-3.3
6	20655.00	45.9 AV	54.0	-8.1	3.69 H	66	49.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	104.2 PK			1.90 V	172	97.0	7.2
2	*6885.00	92.7 AV			1.90 V	172	85.5	7.2
3	#13770.00	59.0 PK	88.2	-29.2	2.44 V	86	44.0	15.0
4	#13770.00	49.1 AV	68.2	-19.1	2.44 V	86	34.1	15.0
5	20655.00	57.4 PK	74.0	-16.6	1.53 V	318	60.7	-3.3
6	20655.00	45.6 AV	54.0	-8.4	1.53 V	318	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	103.1 PK			2.50 H	135	95.4	7.7
2	*6965.00	91.6 AV			2.50 H	135	83.9	7.7
3	#13930.00	59.6 PK	88.2	-28.6	3.94 H	339	44.3	15.3
4	#13930.00	50.2 AV	68.2	-18.0	3.94 H	339	34.9	15.3
5	20895.00	57.7 PK	74.0	-16.3	3.68 H	41	60.4	-2.7
6	20895.00	46.3 AV	54.0	-7.7	3.68 H	41	49.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	105.1 PK			1.93 V	180	97.4	7.7
2	*6965.00	93.3 AV			1.93 V	180	85.6	7.7
3	#13930.00	59.5 PK	88.2	-28.7	2.45 V	91	44.2	15.3
4	#13930.00	49.5 AV	68.2	-18.7	2.45 V	91	34.2	15.3
5	20895.00	57.1 PK	74.0	-16.9	1.57 V	336	59.8	-2.7
6	20895.00	45.4 AV	54.0	-8.6	1.57 V	336	48.1	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	103.1 PK			2.48 H	126	93.9	9.2
2	*7085.00	91.5 AV			2.48 H	126	82.3	9.2
3	#7125.00	55.8 PK	88.2	-32.4	2.48 H	126	46.4	9.4
4	#7125.00	44.2 AV	68.2	-24.0	2.48 H	126	34.8	9.4
5	7250.00	55.8 PK	74.0	-18.2	2.48 H	126	47.1	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.48 H	126	34.6	8.7
7	#14170.00	59.0 PK	88.2	-29.2	3.99 H	360	43.8	15.2
8	#14170.00	49.7 AV	68.2	-18.5	3.99 H	360	34.5	15.2
9	21255.00	56.6 PK	74.0	-17.4	3.65 H	62	58.0	-1.4
10	21255.00	45.6 AV	54.0	-8.4	3.65 H	62	47.0	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	104.6 PK			1.95 V	173	95.4	9.2
2	*7085.00	93.0 AV			1.95 V	173	83.8	9.2
3	#7125.00	56.2 PK	88.2	-32.0	1.99 V	185	46.8	9.4
4	#7125.00	44.5 AV	68.2	-23.7	1.99 V	185	35.1	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.99 V	185	46.1	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.99 V	185	34.6	8.7
7	#14170.00	59.4 PK	88.2	-28.8	2.42 V	66	44.2	15.2
8	#14170.00	49.6 AV	68.2	-18.6	2.42 V	66	34.4	15.2
9	21255.00	57.1 PK	74.0	-16.9	1.61 V	340	58.5	-1.4
10	21255.00	45.5 AV	54.0	-8.5	1.61 V	340	46.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.9 PK	88.2	-14.3	2.50 H	118	69.6	4.3
2	#5925.00	62.3 AV	68.2	-5.9	2.50 H	118	58.0	4.3
3	*5985.00	109.1 PK			2.50 H	118	104.7	4.4
4	*5985.00	97.2 AV			2.50 H	118	92.8	4.4
5	11970.00	59.5 PK	74.0	-14.5	3.87 H	358	47.3	12.2
6	11970.00	50.2 AV	54.0	-3.8	3.87 H	358	38.0	12.2
7	17955.00	57.9 PK	74.0	-16.1	3.73 H	28	34.5	23.4
8	17955.00	46.1 AV	54.0	-7.9	3.73 H	28	22.7	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.8 PK	88.2	-11.4	1.58 V	201	72.5	4.3
2	#5925.00	65.4 AV	68.2	-2.8	1.58 V	201	61.1	4.3
3	*5985.00	109.6 PK			1.58 V	201	105.2	4.4
4	*5985.00	98.0 AV			1.58 V	201	93.6	4.4
5	11970.00	59.4 PK	74.0	-14.6	2.47 V	63	47.2	12.2
6	11970.00	49.3 AV	54.0	-4.7	2.47 V	63	37.1	12.2
7	17955.00	57.2 PK	74.0	-16.8	1.57 V	323	33.8	23.4
8	17955.00	45.5 AV	54.0	-8.5	1.57 V	323	22.1	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.6 PK			2.53 H	120	107.6	5.0
2	*6225.00	101.2 AV			2.53 H	120	96.2	5.0
3	12450.00	59.0 PK	74.0	-15.0	3.86 H	357	46.7	12.3
4	12450.00	49.9 AV	54.0	-4.1	3.86 H	357	37.6	12.3
5	18675.00	57.2 PK	74.0	-16.8	3.78 H	54	62.1	-4.9
6	18675.00	45.7 AV	54.0	-8.3	3.78 H	54	50.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	112.8 PK			2.05 V	128	107.8	5.0
2	*6225.00	101.7 AV			2.05 V	128	96.7	5.0
3	12450.00	59.9 PK	74.0	-14.1	2.39 V	71	47.6	12.3
4	12450.00	49.3 AV	54.0	-4.7	2.39 V	71	37.0	12.3
5	18675.00	57.2 PK	74.0	-16.8	1.51 V	313	62.1	-4.9
6	18675.00	45.5 AV	54.0	-8.5	1.51 V	313	50.4	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.7 PK			2.54 H	115	106.5	6.2
2	*6385.00	101.5 AV			2.54 H	115	95.3	6.2
3	#12770.00	59.2 PK	88.2	-29.0	3.86 H	353	46.4	12.8
4	#12770.00	49.9 AV	68.2	-18.3	3.86 H	353	37.1	12.8
5	19155.00	57.1 PK	74.0	-16.9	3.78 H	37	60.9	-3.8
6	19155.00	45.5 AV	54.0	-8.5	3.78 H	37	49.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	112.5 PK			2.10 V	129	106.3	6.2
2	*6385.00	101.6 AV			2.10 V	129	95.4	6.2
3	#12770.00	59.7 PK	88.2	-28.5	2.44 V	59	46.9	12.8
4	#12770.00	49.1 AV	68.2	-19.1	2.44 V	59	36.3	12.8
5	19155.00	57.3 PK	74.0	-16.7	1.47 V	310	61.1	-3.8
6	19155.00	45.5 AV	54.0	-8.5	1.47 V	310	49.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.4 PK			2.49 H	107	105.9	6.5
2	*6465.00	101.2 AV			2.49 H	107	94.7	6.5
3	#12930.00	59.3 PK	88.2	-28.9	3.81 H	347	46.2	13.1
4	#12930.00	49.7 AV	68.2	-18.5	3.81 H	347	36.6	13.1
5	19395.00	57.4 PK	74.0	-16.6	3.73 H	33	61.1	-3.7
6	19395.00	45.7 AV	54.0	-8.3	3.73 H	33	49.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.5 PK			2.05 V	141	106.0	6.5
2	*6465.00	101.4 AV			2.05 V	141	94.9	6.5
3	#12930.00	60.2 PK	88.2	-28.0	2.46 V	49	47.1	13.1
4	#12930.00	50.0 AV	68.2	-18.2	2.46 V	49	36.9	13.1
5	19395.00	56.6 PK	74.0	-17.4	1.48 V	326	60.3	-3.7
6	19395.00	45.2 AV	54.0	-8.8	1.48 V	326	48.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	102.4 PK			2.39 H	121	95.5	6.9
2	*6545.00	90.7 AV			2.39 H	121	83.8	6.9
3	#13090.00	59.6 PK	88.2	-28.6	3.92 H	356	46.4	13.2
4	#13090.00	50.4 AV	68.2	-17.8	3.92 H	356	37.2	13.2
5	19635.00	57.0 PK	74.0	-17.0	3.71 H	61	61.0	-4.0
6	19635.00	45.7 AV	54.0	-8.3	3.71 H	61	49.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	104.2 PK			1.44 V	172	97.3	6.9
2	*6545.00	92.4 AV			1.44 V	172	85.5	6.9
3	#13090.00	59.0 PK	88.2	-29.2	2.50 V	62	45.8	13.2
4	#13090.00	49.0 AV	68.2	-19.2	2.50 V	62	35.8	13.2
5	19635.00	57.9 PK	74.0	-16.1	1.51 V	319	61.9	-4.0
6	19635.00	46.1 AV	54.0	-7.9	1.51 V	319	50.1	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.6 PK			2.47 H	114	105.7	6.9
2	*6625.00	101.4 AV			2.47 H	114	94.5	6.9
3	13250.00	59.6 PK	74.0	-14.4	3.85 H	360	46.0	13.6
4	13250.00	50.8 AV	54.0	-3.2	3.85 H	360	37.2	13.6
5	19875.00	57.8 PK	74.0	-16.2	3.67 H	56	61.3	-3.5
6	19875.00	46.3 AV	54.0	-7.7	3.67 H	56	49.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	112.9 PK			2.11 V	144	106.0	6.9
2	*6625.00	102.0 AV			2.11 V	144	95.1	6.9
3	13250.00	59.7 PK	74.0	-14.3	2.44 V	63	46.1	13.6
4	13250.00	49.3 AV	54.0	-4.7	2.44 V	63	35.7	13.6
5	19875.00	57.1 PK	74.0	-16.9	1.55 V	311	60.6	-3.5
6	19875.00	45.9 AV	54.0	-8.1	1.55 V	311	49.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.8 PK			2.57 H	109	105.6	7.2
2	*6705.00	101.4 AV			2.57 H	109	94.2	7.2
3	#13410.00	59.4 PK	88.2	-28.8	3.90 H	357	45.2	14.2
4	#13410.00	49.8 AV	68.2	-18.4	3.90 H	357	35.6	14.2
5	20115.00	57.1 PK	74.0	-16.9	3.74 H	44	60.6	-3.5
6	20115.00	45.6 AV	54.0	-8.4	3.74 H	44	49.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	112.7 PK			2.10 V	135	105.5	7.2
2	*6705.00	101.5 AV			2.10 V	135	94.3	7.2
3	#13410.00	59.7 PK	88.2	-28.5	2.47 V	48	45.5	14.2
4	#13410.00	49.2 AV	68.2	-19.0	2.47 V	48	35.0	14.2
5	20115.00	57.0 PK	74.0	-17.0	1.54 V	321	60.5	-3.5
6	20115.00	45.3 AV	54.0	-8.7	1.54 V	321	48.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.1 PK			2.58 H	135	106.1	7.0
2	*6785.00	101.6 AV			2.58 H	135	94.6	7.0
3	#13570.00	59.2 PK	88.2	-29.0	3.91 H	360	44.6	14.6
4	#13570.00	49.9 AV	68.2	-18.3	3.91 H	360	35.3	14.6
5	20355.00	56.6 PK	74.0	-17.4	3.72 H	32	59.7	-3.1
6	20355.00	45.3 AV	54.0	-8.7	3.72 H	32	48.4	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.3 PK			1.99 V	133	106.3	7.0
2	*6785.00	102.0 AV			1.99 V	133	95.0	7.0
3	#13570.00	59.8 PK	88.2	-28.4	2.46 V	72	45.2	14.6
4	#13570.00	49.6 AV	68.2	-18.6	2.46 V	72	35.0	14.6
5	20355.00	56.8 PK	74.0	-17.2	1.49 V	308	59.9	-3.1
6	20355.00	45.2 AV	54.0	-8.8	1.49 V	308	48.3	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.5 PK			2.44 H	121	95.3	7.2
2	*6865.00	90.7 AV			2.44 H	121	83.5	7.2
3	#13730.00	59.6 PK	88.2	-28.6	3.92 H	360	44.5	15.1
4	#13730.00	50.3 AV	68.2	-17.9	3.92 H	360	35.2	15.1
5	20595.00	57.1 PK	74.0	-16.9	3.60 H	67	60.4	-3.3
6	20595.00	46.1 AV	54.0	-7.9	3.60 H	67	49.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	103.8 PK			1.41 V	196	96.6	7.2
2	*6865.00	91.9 AV			1.41 V	196	84.7	7.2
3	#13730.00	59.4 PK	88.2	-28.8	2.49 V	73	44.3	15.1
4	#13730.00	49.3 AV	68.2	-18.9	2.49 V	73	34.2	15.1
5	20595.00	57.4 PK	74.0	-16.6	1.55 V	331	60.7	-3.3
6	20595.00	45.6 AV	54.0	-8.4	1.55 V	331	48.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	102.9 PK			2.35 H	129	95.4	7.5
2	*6945.00	91.0 AV			2.35 H	129	83.5	7.5
3	#13890.00	59.2 PK	88.2	-29.0	3.94 H	347	44.0	15.2
4	#13890.00	49.7 AV	68.2	-18.5	3.94 H	347	34.5	15.2
5	20835.00	57.7 PK	74.0	-16.3	3.66 H	54	60.6	-2.9
6	20835.00	46.2 AV	54.0	-7.8	3.66 H	54	49.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	104.3 PK			1.43 V	199	96.8	7.5
2	*6945.00	92.4 AV			1.43 V	199	84.9	7.5
3	#13890.00	59.0 PK	88.2	-29.2	2.48 V	66	43.8	15.2
4	#13890.00	49.2 AV	68.2	-19.0	2.48 V	66	34.0	15.2
5	20835.00	58.3 PK	74.0	-15.7	1.55 V	326	61.2	-2.9
6	20835.00	46.1 AV	54.0	-7.9	1.55 V	326	49.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.9 PK			2.39 H	123	94.5	8.4
2	*7025.00	91.2 AV			2.39 H	123	82.8	8.4
3	#7125.00	59.0 PK	88.2	-29.2	2.39 H	123	49.6	9.4
4	#7125.00	44.8 AV	68.2	-23.4	2.39 H	123	35.4	9.4
5	7250.00	55.1 PK	74.0	-18.9	2.39 H	123	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	2.39 H	123	34.7	8.7
7	#14050.00	59.1 PK	88.2	-29.1	3.88 H	359	43.6	15.5
8	#14050.00	49.7 AV	68.2	-18.5	3.88 H	359	34.2	15.5
9	21075.00	57.9 PK	74.0	-16.1	3.68 H	50	60.1	-2.2
10	21075.00	46.5 AV	54.0	-7.5	3.68 H	50	48.7	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.1 PK			1.40 V	184	95.7	8.4
2	*7025.00	92.4 AV			1.40 V	184	84.0	8.4
3	#7125.00	56.8 PK	88.2	-31.4	1.40 V	184	47.4	9.4
4	#7125.00	45.0 AV	68.2	-23.2	1.40 V	184	35.6	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.40 V	184	46.6	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.40 V	184	34.8	8.7
7	#14050.00	59.0 PK	88.2	-29.2	2.42 V	61	43.5	15.5
8	#14050.00	48.9 AV	68.2	-19.3	2.42 V	61	33.4	15.5
9	21075.00	57.5 PK	74.0	-16.5	1.51 V	333	59.7	-2.2
10	21075.00	45.5 AV	54.0	-8.5	1.51 V	333	47.7	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	2.21 H	128	72.0	4.3
2	#5925.00	62.9 AV	68.2	-5.3	2.21 H	128	58.6	4.3
3	*6025.00	106.9 PK			2.21 H	128	102.7	4.2
4	*6025.00	94.5 AV			2.21 H	128	90.3	4.2
5	12050.00	59.4 PK	74.0	-14.6	3.81 H	348	47.0	12.4
6	12050.00	49.7 AV	54.0	-4.3	3.81 H	348	37.3	12.4
7	18075.00	57.7 PK	74.0	-16.3	3.73 H	42	62.4	-4.7
8	18075.00	46.1 AV	54.0	-7.9	3.73 H	42	50.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.1 PK	88.2	-10.1	1.54 V	181	73.8	4.3
2	#5925.00	65.2 AV	68.2	-3.0	1.54 V	181	60.9	4.3
3	*6025.00	107.6 PK			1.54 V	181	103.4	4.2
4	*6025.00	95.2 AV			1.54 V	181	91.0	4.2
5	12050.00	59.4 PK	74.0	-14.6	2.38 V	63	47.0	12.4
6	12050.00	49.2 AV	54.0	-4.8	2.38 V	63	36.8	12.4
7	18075.00	56.8 PK	74.0	-17.2	1.50 V	340	61.5	-4.7
8	18075.00	45.5 AV	54.0	-8.5	1.50 V	340	50.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.1 PK			2.25 H	138	102.3	4.8
2	*6185.00	94.7 AV			2.25 H	138	89.9	4.8
3	12370.00	60.0 PK	74.0	-14.0	3.91 H	350	47.7	12.3
4	12370.00	50.3 AV	54.0	-3.7	3.91 H	350	38.0	12.3
5	18555.00	57.7 PK	74.0	-16.3	3.69 H	44	62.6	-4.9
6	18555.00	46.2 AV	54.0	-7.8	3.69 H	44	51.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	107.2 PK			1.60 V	168	102.4	4.8
2	*6185.00	95.0 AV			1.60 V	168	90.2	4.8
3	12370.00	60.3 PK	74.0	-13.7	2.46 V	71	48.0	12.3
4	12370.00	49.8 AV	54.0	-4.2	2.46 V	71	37.5	12.3
5	18555.00	57.4 PK	74.0	-16.6	1.47 V	309	62.3	-4.9
6	18555.00	45.6 AV	54.0	-8.4	1.47 V	309	50.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	106.6 PK			2.23 H	125	100.5	6.1
2	*6345.00	94.5 AV			2.23 H	125	88.4	6.1
3	12690.00	60.1 PK	74.0	-13.9	3.81 H	343	47.2	12.9
4	12690.00	50.8 AV	54.0	-3.2	3.81 H	343	37.9	12.9
5	19035.00	57.0 PK	74.0	-17.0	3.76 H	35	60.9	-3.9
6	19035.00	45.3 AV	54.0	-8.7	3.76 H	35	49.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	108.0 PK			1.49 V	186	101.9	6.1
2	*6345.00	95.7 AV			1.49 V	186	89.6	6.1
3	12690.00	60.4 PK	74.0	-13.6	2.41 V	47	47.5	12.9
4	12690.00	50.0 AV	54.0	-4.0	2.41 V	47	37.1	12.9
5	19035.00	57.1 PK	74.0	-16.9	1.53 V	325	61.0	-3.9
6	19035.00	45.5 AV	54.0	-8.5	1.53 V	325	49.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.8 PK			2.23 H	134	100.0	6.8
2	*6505.00	94.2 AV			2.23 H	134	87.4	6.8
3	#13010.00	59.3 PK	88.2	-28.9	3.86 H	357	46.1	13.2
4	#13010.00	49.9 AV	68.2	-18.3	3.86 H	357	36.7	13.2
5	19515.00	56.9 PK	74.0	-17.1	3.74 H	28	61.0	-4.1
6	19515.00	45.5 AV	54.0	-8.5	3.74 H	28	49.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.5 PK			1.54 V	176	100.7	6.8
2	*6505.00	95.0 AV			1.54 V	176	88.2	6.8
3	#13010.00	60.1 PK	88.2	-28.1	2.36 V	61	46.9	13.2
4	#13010.00	49.9 AV	68.2	-18.3	2.36 V	61	36.7	13.2
5	19515.00	56.6 PK	74.0	-17.4	1.48 V	308	60.7	-4.1
6	19515.00	45.1 AV	54.0	-8.9	1.48 V	308	49.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.1 PK			2.22 H	133	98.9	7.2
2	*6665.00	94.0 AV			2.22 H	133	86.8	7.2
3	13330.00	59.7 PK	74.0	-14.3	3.84 H	360	45.9	13.8
4	13330.00	50.1 AV	54.0	-3.9	3.84 H	360	36.3	13.8
5	19995.00	57.4 PK	74.0	-16.6	3.68 H	37	61.0	-3.6
6	19995.00	45.7 AV	54.0	-8.3	3.68 H	37	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.6 PK			1.53 V	168	100.4	7.2
2	*6665.00	95.5 AV			1.53 V	168	88.3	7.2
3	13330.00	59.7 PK	74.0	-14.3	2.39 V	61	45.9	13.8
4	13330.00	49.2 AV	54.0	-4.8	2.39 V	61	35.4	13.8
5	19995.00	57.1 PK	74.0	-16.9	1.57 V	329	60.7	-3.6
6	19995.00	45.6 AV	54.0	-8.4	1.57 V	329	49.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	103.4 PK			2.55 H	122	96.3	7.1
2	*6825.00	91.5 AV			2.55 H	122	84.4	7.1
3	#13650.00	59.6 PK	88.2	-28.6	3.94 H	332	44.7	14.9
4	#13650.00	50.5 AV	68.2	-17.7	3.94 H	332	35.6	14.9
5	20475.00	57.3 PK	74.0	-16.7	3.70 H	56	60.5	-3.2
6	20475.00	46.3 AV	54.0	-7.7	3.70 H	56	49.5	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	104.0 PK			1.91 V	165	96.9	7.1
2	*6825.00	91.7 AV			1.91 V	165	84.6	7.1
3	#13650.00	59.4 PK	88.2	-28.8	2.52 V	86	44.5	14.9
4	#13650.00	49.3 AV	68.2	-18.9	2.52 V	86	34.4	14.9
5	20475.00	58.0 PK	74.0	-16.0	1.54 V	320	61.2	-3.2
6	20475.00	46.3 AV	54.0	-7.7	1.54 V	320	49.5	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.4 PK			2.51 H	124	95.6	7.8
2	*6985.00	91.3 AV			2.51 H	124	83.5	7.8
3	#7125.00	72.2 PK	88.2	-16.0	2.51 H	124	62.8	9.4
4	#7125.00	54.6 AV	68.2	-13.6	2.51 H	124	45.2	9.4
5	7250.00	55.7 PK	74.0	-18.3	2.51 H	124	47.0	8.7
6	7250.00	44.0 AV	54.0	-10.0	2.51 H	124	35.3	8.7
7	#13970.00	59.2 PK	88.2	-29.0	3.89 H	356	43.7	15.5
8	#13970.00	49.6 AV	68.2	-18.6	3.89 H	356	34.1	15.5
9	20955.00	56.8 PK	74.0	-17.2	3.70 H	58	59.5	-2.7
10	20955.00	45.8 AV	54.0	-8.2	3.70 H	58	48.5	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.1 PK			1.90 V	173	96.3	7.8
2	*6985.00	91.9 AV			1.90 V	173	84.1	7.8
3	#7125.00	64.6 PK	88.2	-23.6	1.90 V	173	55.2	9.4
4	#7125.00	52.4 AV	68.2	-15.8	1.90 V	173	43.0	9.4
5	7250.00	55.7 PK	74.0	-18.3	1.90 V	173	47.0	8.7
6	7250.00	43.9 AV	54.0	-10.1	1.90 V	173	35.2	8.7
7	#13970.00	59.5 PK	88.2	-28.7	2.44 V	74	44.0	15.5
8	#13970.00	49.4 AV	68.2	-18.8	2.44 V	74	33.9	15.5
9	20955.00	57.2 PK	74.0	-16.8	1.53 V	324	59.9	-2.7
10	20955.00	45.3 AV	54.0	-8.7	1.53 V	324	48.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.3 PK	88.2	-12.9	2.25 H	129	71.0	4.3
2	#5925.00	55.6 AV	68.2	-12.6	2.25 H	129	51.3	4.3
3	*5955.00	122.5 PK			2.25 H	129	118.0	4.5
4	*5955.00	114.2 AV			2.25 H	129	109.7	4.5
5	11910.00	58.7 PK	74.0	-15.3	3.86 H	357	46.5	12.2
6	11910.00	48.9 AV	54.0	-5.1	3.86 H	357	36.7	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.62 H	24	35.4	21.9
8	17865.00	45.1 AV	54.0	-8.9	3.62 H	24	23.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.3 PK	88.2	-8.9	1.99 V	154	75.0	4.3
2	#5925.00	58.6 AV	68.2	-9.6	1.99 V	154	54.3	4.3
3	*5955.00	122.7 PK			1.99 V	154	118.2	4.5
4	*5955.00	114.7 AV			1.99 V	154	110.2	4.5
5	11910.00	57.7 PK	74.0	-16.3	3.62 V	64	45.5	12.2
6	11910.00	47.5 AV	54.0	-6.5	3.62 V	64	35.3	12.2
7	17865.00	54.9 PK	74.0	-19.1	1.50 V	322	33.0	21.9
8	17865.00	43.5 AV	54.0	-10.5	1.50 V	322	21.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.1 PK			2.23 H	118	117.3	4.8
2	*6195.00	113.9 AV			2.23 H	118	109.1	4.8
3	12390.00	59.2 PK	74.0	-14.8	3.84 H	347	46.9	12.3
4	12390.00	49.3 AV	54.0	-4.7	3.84 H	347	37.0	12.3
5	18585.00	56.9 PK	74.0	-17.1	3.64 H	28	61.9	-5.0
6	18585.00	44.8 AV	54.0	-9.2	3.64 H	28	49.8	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.5 PK			2.01 V	144	118.7	4.8
2	*6195.00	115.2 AV			2.01 V	144	110.4	4.8
3	12390.00	57.8 PK	74.0	-16.2	3.63 V	60	45.5	12.3
4	12390.00	47.7 AV	54.0	-6.3	3.63 V	60	35.4	12.3
5	18585.00	54.9 PK	74.0	-19.1	1.47 V	325	59.9	-5.0
6	18585.00	43.8 AV	54.0	-10.2	1.47 V	325	48.8	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.0 PK			2.20 H	132	116.6	6.4
2	*6415.00	114.4 AV			2.20 H	132	108.0	6.4
3	#12830.00	58.4 PK	88.2	-29.8	3.82 H	360	45.4	13.0
4	#12830.00	48.5 AV	68.2	-19.7	3.82 H	360	35.5	13.0
5	19245.00	57.5 PK	74.0	-16.5	3.61 H	15	61.3	-3.8
6	19245.00	45.3 AV	54.0	-8.7	3.61 H	15	49.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			2.04 V	145	116.3	6.4
2	*6415.00	114.8 AV			2.04 V	145	108.4	6.4
3	#12830.00	58.0 PK	88.2	-30.2	3.57 V	54	45.0	13.0
4	#12830.00	47.8 AV	68.2	-20.4	3.57 V	54	34.8	13.0
5	19245.00	55.1 PK	74.0	-18.9	1.47 V	338	58.9	-3.8
6	19245.00	43.9 AV	54.0	-10.1	1.47 V	338	47.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.8 PK			2.52 H	119	96.4	6.4
2	*6435.00	92.2 AV			2.52 H	119	85.8	6.4
3	#12870.00	58.0 PK	88.2	-30.2	3.91 H	360	45.0	13.0
4	#12870.00	48.3 AV	68.2	-19.9	3.91 H	360	35.3	13.0
5	19305.00	57.4 PK	74.0	-16.6	3.57 H	33	61.1	-3.7
6	19305.00	45.3 AV	54.0	-8.7	3.57 H	33	49.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.7 PK			2.44 V	140	97.3	6.4
2	*6435.00	92.8 AV			2.44 V	140	86.4	6.4
3	#12870.00	57.6 PK	88.2	-30.6	3.58 V	60	44.6	13.0
4	#12870.00	46.9 AV	68.2	-21.3	3.58 V	60	33.9	13.0
5	19305.00	53.9 PK	74.0	-20.1	1.53 V	305	57.6	-3.7
6	19305.00	42.8 AV	54.0	-11.2	1.53 V	305	46.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.5 PK			2.22 H	116	115.9	6.6
2	*6475.00	114.4 AV			2.22 H	116	107.8	6.6
3	#12950.00	58.4 PK	88.2	-29.8	3.89 H	344	45.3	13.1
4	#12950.00	48.6 AV	68.2	-19.6	3.89 H	344	35.5	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.61 H	19	60.5	-3.8
6	19425.00	44.8 AV	54.0	-9.2	3.61 H	19	48.6	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.8 PK			1.96 V	142	116.2	6.6
2	*6475.00	114.6 AV			1.96 V	142	108.0	6.6
3	#12950.00	57.1 PK	88.2	-31.1	3.62 V	49	44.0	13.1
4	#12950.00	47.1 AV	68.2	-21.1	3.62 V	49	34.0	13.1
5	19425.00	55.2 PK	74.0	-18.8	1.47 V	332	59.0	-3.8
6	19425.00	43.6 AV	54.0	-10.4	1.47 V	332	47.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.2 PK			2.56 H	102	95.3	6.9
2	*6515.00	91.6 AV			2.56 H	102	84.7	6.9
3	#13030.00	58.1 PK	88.2	-30.1	3.86 H	360	44.9	13.2
4	#13030.00	48.2 AV	68.2	-20.0	3.86 H	360	35.0	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.61 H	43	60.8	-4.1
6	19545.00	44.9 AV	54.0	-9.1	3.61 H	43	49.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.7 PK			2.38 V	139	95.8	6.9
2	*6515.00	92.2 AV			2.38 V	139	85.3	6.9
3	#13030.00	57.7 PK	88.2	-30.5	3.54 V	61	44.5	13.2
4	#13030.00	47.1 AV	68.2	-21.1	3.54 V	61	33.9	13.2
5	19545.00	54.2 PK	74.0	-19.8	1.47 V	294	58.3	-4.1
6	19545.00	42.9 AV	54.0	-11.1	1.47 V	294	47.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.5 PK			2.25 H	131	115.6	6.9
2	*6535.00	114.1 AV			2.25 H	131	107.2	6.9
3	#13070.00	58.7 PK	88.2	-29.5	3.81 H	360	45.5	13.2
4	#13070.00	49.1 AV	68.2	-19.1	3.81 H	360	35.9	13.2
5	19605.00	57.2 PK	74.0	-16.8	3.62 H	14	61.2	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.62 H	14	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.0 PK			1.97 V	144	115.1	6.9
2	*6535.00	114.2 AV			1.97 V	144	107.3	6.9
3	#13070.00	57.6 PK	88.2	-30.6	3.56 V	77	44.4	13.2
4	#13070.00	47.7 AV	68.2	-20.5	3.56 V	77	34.5	13.2
5	19605.00	55.3 PK	74.0	-18.7	1.46 V	321	59.3	-4.0
6	19605.00	43.9 AV	54.0	-10.1	1.46 V	321	47.9	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.29 H	139	115.1	7.2
2	*6695.00	113.9 AV			2.29 H	139	106.7	7.2
3	13390.00	58.8 PK	74.0	-15.2	3.85 H	343	44.8	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.85 H	343	34.9	14.0
5	20085.00	57.9 PK	74.0	-16.1	3.63 H	21	61.4	-3.5
6	20085.00	45.5 AV	54.0	-8.5	3.63 H	21	49.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.0 PK			2.02 V	153	114.8	7.2
2	*6695.00	114.3 AV			2.02 V	153	107.1	7.2
3	13390.00	57.4 PK	74.0	-16.6	3.64 V	77	43.4	14.0
4	13390.00	47.1 AV	54.0	-6.9	3.64 V	77	33.1	14.0
5	20085.00	54.4 PK	74.0	-19.6	1.50 V	309	57.9	-3.5
6	20085.00	43.2 AV	54.0	-10.8	1.50 V	309	46.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.9 PK			2.20 H	129	115.7	7.2
2	*6855.00	114.6 AV			2.20 H	129	107.4	7.2
3	#13710.00	58.5 PK	88.2	-29.7	3.89 H	354	43.3	15.2
4	#13710.00	48.6 AV	68.2	-19.6	3.89 H	354	33.4	15.2
5	20565.00	56.9 PK	74.0	-17.1	3.59 H	12	60.2	-3.3
6	20565.00	44.9 AV	54.0	-9.1	3.59 H	12	48.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.7 PK			1.94 V	139	115.5	7.2
2	*6855.00	114.8 AV			1.94 V	139	107.6	7.2
3	#13710.00	57.7 PK	88.2	-30.5	3.58 V	74	42.5	15.2
4	#13710.00	47.5 AV	68.2	-20.7	3.58 V	74	32.3	15.2
5	20565.00	54.5 PK	74.0	-19.5	1.51 V	313	57.8	-3.3
6	20565.00	43.2 AV	54.0	-10.8	1.51 V	313	46.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			2.46 H	102	95.6	7.2
2	*6875.00	92.2 AV			2.46 H	102	85.0	7.2
3	#13750.00	57.8 PK	88.2	-30.4	3.95 H	360	42.7	15.1
4	#13750.00	47.9 AV	68.2	-20.3	3.95 H	360	32.8	15.1
5	20625.00	57.1 PK	74.0	-16.9	3.62 H	43	60.4	-3.3
6	20625.00	45.1 AV	54.0	-8.9	3.62 H	43	48.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.0 PK			2.42 V	159	95.8	7.2
2	*6875.00	92.1 AV			2.42 V	159	84.9	7.2
3	#13750.00	58.0 PK	88.2	-30.2	3.64 V	75	42.9	15.1
4	#13750.00	47.3 AV	68.2	-20.9	3.64 V	75	32.2	15.1
5	20625.00	53.9 PK	74.0	-20.1	1.50 V	300	57.2	-3.3
6	20625.00	42.9 AV	54.0	-11.1	1.50 V	300	46.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.3 PK			2.52 H	110	94.3	8.0
2	*6995.00	91.6 AV			2.52 H	110	83.6	8.0
3	#13990.00	58.3 PK	88.2	-29.9	3.95 H	360	42.7	15.6
4	#13990.00	48.6 AV	68.2	-19.6	3.95 H	360	33.0	15.6
5	20985.00	57.7 PK	74.0	-16.3	3.54 H	21	60.5	-2.8
6	20985.00	45.5 AV	54.0	-8.5	3.54 H	21	48.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.4 PK			2.45 V	159	95.4	8.0
2	*6995.00	92.7 AV			2.45 V	159	84.7	8.0
3	#13990.00	57.2 PK	88.2	-31.0	3.60 V	65	41.6	15.6
4	#13990.00	46.5 AV	68.2	-21.7	3.60 V	65	30.9	15.6
5	20985.00	53.9 PK	74.0	-20.1	1.59 V	316	56.7	-2.8
6	20985.00	42.7 AV	54.0	-11.3	1.59 V	316	45.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			2.52 H	110	92.8	9.5
2	*7115.00	91.8 AV			2.52 H	110	82.3	9.5
3	#7125.00	85.3 PK	88.2	-2.9	2.52 H	110	75.9	9.4
4	#7125.00	57.6 AV	68.2	-10.6	2.52 H	110	48.2	9.4
5	7250.00	55.6 PK	74.0	-18.4	2.52 H	110	46.9	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.52 H	110	35.0	8.7
7	#14230.00	57.5 PK	88.2	-30.7	3.96 H	360	42.2	15.3
8	#14230.00	48.0 AV	68.2	-20.2	3.96 H	360	32.7	15.3
9	21345.00	57.5 PK	74.0	-16.5	3.61 H	23	59.1	-1.6
10	21345.00	45.4 AV	54.0	-8.6	3.61 H	23	47.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.1 PK			2.41 V	155	93.6	9.5
2	*7115.00	92.4 AV			2.41 V	155	82.9	9.5
3	#7125.00	85.5 PK	88.2	-2.7	2.41 V	155	76.1	9.4
4	#7125.00	58.3 AV	68.2	-9.9	2.41 V	155	48.9	9.4
5	7250.00	55.4 PK	74.0	-18.6	2.41 V	155	46.7	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.41 V	155	34.6	8.7
7	#14230.00	57.7 PK	88.2	-30.5	3.57 V	75	42.4	15.3
8	#14230.00	47.0 AV	68.2	-21.2	3.57 V	75	31.7	15.3
9	21345.00	53.9 PK	74.0	-20.1	1.48 V	292	55.5	-1.6
10	21345.00	43.0 AV	54.0	-11.0	1.48 V	292	44.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.3 PK	88.2	-4.9	2.26 H	118	79.0	4.3
2	#5925.00	63.3 AV	68.2	-4.9	2.26 H	118	59.0	4.3
3	*5955.00	121.9 PK			2.26 H	118	117.4	4.5
4	*5955.00	112.2 AV			2.26 H	118	107.7	4.5
5	11910.00	58.8 PK	74.0	-15.2	3.90 H	360	46.6	12.2
6	11910.00	48.8 AV	54.0	-5.2	3.90 H	360	36.6	12.2
7	17865.00	57.1 PK	74.0	-16.9	3.65 H	21	35.2	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.65 H	21	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	86.2 PK	88.2	-2.0	2.11 V	160	81.9	4.3
2	#5925.00	59.2 AV	68.2	-9.0	2.11 V	160	54.9	4.3
3	*5955.00	122.3 PK			2.11 V	160	117.8	4.5
4	*5955.00	112.2 AV			2.11 V	160	107.7	4.5
5	11910.00	57.3 PK	74.0	-16.7	3.65 V	55	45.1	12.2
6	11910.00	47.3 AV	54.0	-6.7	3.65 V	55	35.1	12.2
7	17865.00	54.7 PK	74.0	-19.3	1.55 V	323	32.8	21.9
8	17865.00	43.4 AV	54.0	-10.6	1.55 V	323	21.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.7 PK			2.30 H	110	116.9	4.8
2	*6195.00	112.1 AV			2.30 H	110	107.3	4.8
3	12390.00	58.9 PK	74.0	-15.1	3.90 H	349	46.6	12.3
4	12390.00	49.3 AV	54.0	-4.7	3.90 H	349	37.0	12.3
5	18585.00	57.3 PK	74.0	-16.7	3.62 H	28	62.3	-5.0
6	18585.00	45.1 AV	54.0	-8.9	3.62 H	28	50.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.3 PK			2.07 V	145	117.5	4.8
2	*6195.00	112.1 AV			2.07 V	145	107.3	4.8
3	12390.00	57.7 PK	74.0	-16.3	3.63 V	54	45.4	12.3
4	12390.00	47.3 AV	54.0	-6.7	3.63 V	54	35.0	12.3
5	18585.00	54.7 PK	74.0	-19.3	1.51 V	318	59.7	-5.0
6	18585.00	43.0 AV	54.0	-11.0	1.51 V	318	48.0	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.8 PK			2.31 H	129	115.4	6.4
2	*6415.00	112.0 AV			2.31 H	129	105.6	6.4
3	#12830.00	59.3 PK	88.2	-28.9	3.82 H	348	46.3	13.0
4	#12830.00	49.4 AV	68.2	-18.8	3.82 H	348	36.4	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.65 H	39	60.4	-3.8
6	19245.00	44.7 AV	54.0	-9.3	3.65 H	39	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.2 PK			2.16 V	146	115.8	6.4
2	*6415.00	112.3 AV			2.16 V	146	105.9	6.4
3	#12830.00	58.2 PK	88.2	-30.0	3.61 V	48	45.2	13.0
4	#12830.00	47.8 AV	68.2	-20.4	3.61 V	48	34.8	13.0
5	19245.00	55.3 PK	74.0	-18.7	1.51 V	310	59.1	-3.8
6	19245.00	43.7 AV	54.0	-10.3	1.51 V	310	47.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.9 PK			2.58 H	97	96.5	6.4
2	*6435.00	92.0 AV			2.58 H	97	85.6	6.4
3	#12870.00	58.1 PK	88.2	-30.1	3.86 H	360	45.1	13.0
4	#12870.00	48.6 AV	68.2	-19.6	3.86 H	360	35.6	13.0
5	19305.00	57.3 PK	74.0	-16.7	3.53 H	33	61.0	-3.7
6	19305.00	44.9 AV	54.0	-9.1	3.53 H	33	48.6	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.5 PK			1.86 V	162	98.1	6.4
2	*6435.00	92.8 AV			1.86 V	162	86.4	6.4
3	#12870.00	57.3 PK	88.2	-30.9	3.56 V	61	44.3	13.0
4	#12870.00	46.5 AV	68.2	-21.7	3.56 V	61	33.5	13.0
5	19305.00	54.3 PK	74.0	-19.7	1.52 V	294	58.0	-3.7
6	19305.00	43.0 AV	54.0	-11.0	1.52 V	294	46.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.1 PK			2.32 H	110	115.5	6.6
2	*6475.00	112.2 AV			2.32 H	110	105.6	6.6
3	#12950.00	58.6 PK	88.2	-29.6	3.91 H	360	45.5	13.1
4	#12950.00	49.0 AV	68.2	-19.2	3.91 H	360	35.9	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.57 H	23	60.5	-3.8
6	19425.00	44.7 AV	54.0	-9.3	3.57 H	23	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.5 PK			2.10 V	163	115.9	6.6
2	*6475.00	112.4 AV			2.10 V	163	105.8	6.6
3	#12950.00	57.4 PK	88.2	-30.8	3.66 V	75	44.3	13.1
4	#12950.00	47.3 AV	68.2	-20.9	3.66 V	75	34.2	13.1
5	19425.00	54.5 PK	74.0	-19.5	1.53 V	318	58.3	-3.8
6	19425.00	43.4 AV	54.0	-10.6	1.53 V	318	47.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.0 PK			2.60 H	120	96.1	6.9
2	*6515.00	91.8 AV			2.60 H	120	84.9	6.9
3	#13030.00	57.6 PK	88.2	-30.6	3.95 H	360	44.4	13.2
4	#13030.00	47.8 AV	68.2	-20.4	3.95 H	360	34.6	13.2
5	19545.00	57.0 PK	74.0	-17.0	3.55 H	37	61.1	-4.1
6	19545.00	44.8 AV	54.0	-9.2	3.55 H	37	48.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.2 PK			1.91 V	175	97.3	6.9
2	*6515.00	92.4 AV			1.91 V	175	85.5	6.9
3	#13030.00	57.5 PK	88.2	-30.7	3.64 V	70	44.3	13.2
4	#13030.00	47.0 AV	68.2	-21.2	3.64 V	70	33.8	13.2
5	19545.00	53.7 PK	74.0	-20.3	1.52 V	315	57.8	-4.1
6	19545.00	42.5 AV	54.0	-11.5	1.52 V	315	46.6	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			2.25 H	104	114.7	6.9
2	*6535.00	111.8 AV			2.25 H	104	104.9	6.9
3	#13070.00	58.8 PK	88.2	-29.4	3.89 H	345	45.6	13.2
4	#13070.00	49.1 AV	68.2	-19.1	3.89 H	345	35.9	13.2
5	19605.00	57.2 PK	74.0	-16.8	3.64 H	30	61.2	-4.0
6	19605.00	45.2 AV	54.0	-8.8	3.64 H	30	49.2	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	122.7 PK			2.13 V	161	115.8	6.9
2	*6535.00	112.4 AV			2.13 V	161	105.5	6.9
3	#13070.00	57.8 PK	88.2	-30.4	3.64 V	76	44.6	13.2
4	#13070.00	47.6 AV	68.2	-20.6	3.64 V	76	34.4	13.2
5	19605.00	55.3 PK	74.0	-18.7	1.46 V	318	59.3	-4.0
6	19605.00	44.0 AV	54.0	-10.0	1.46 V	318	48.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.3 PK			2.31 H	115	115.1	7.2
2	*6695.00	112.4 AV			2.31 H	115	105.2	7.2
3	13390.00	58.5 PK	74.0	-15.5	3.87 H	360	44.5	14.0
4	13390.00	48.9 AV	54.0	-5.1	3.87 H	360	34.9	14.0
5	20085.00	56.8 PK	74.0	-17.2	3.61 H	10	60.3	-3.5
6	20085.00	44.9 AV	54.0	-9.1	3.61 H	10	48.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.7 PK			2.10 V	172	114.5	7.2
2	*6695.00	111.8 AV			2.10 V	172	104.6	7.2
3	13390.00	57.5 PK	74.0	-16.5	3.62 V	61	43.5	14.0
4	13390.00	47.5 AV	54.0	-6.5	3.62 V	61	33.5	14.0
5	20085.00	55.4 PK	74.0	-18.6	1.50 V	335	58.9	-3.5
6	20085.00	43.8 AV	54.0	-10.2	1.50 V	335	47.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.6 PK			2.26 H	105	114.4	7.2
2	*6855.00	111.9 AV			2.26 H	105	104.7	7.2
3	#13710.00	58.5 PK	88.2	-29.7	3.81 H	351	43.3	15.2
4	#13710.00	48.9 AV	68.2	-19.3	3.81 H	351	33.7	15.2
5	20565.00	57.6 PK	74.0	-16.4	3.58 H	37	60.9	-3.3
6	20565.00	45.6 AV	54.0	-8.4	3.58 H	37	48.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.3 PK			2.06 V	171	115.1	7.2
2	*6855.00	112.4 AV			2.06 V	171	105.2	7.2
3	#13710.00	57.7 PK	88.2	-30.5	3.63 V	67	42.5	15.2
4	#13710.00	47.6 AV	68.2	-20.6	3.63 V	67	32.4	15.2
5	20565.00	55.5 PK	74.0	-18.5	1.48 V	332	58.8	-3.3
6	20565.00	43.9 AV	54.0	-10.1	1.48 V	332	47.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.0 PK			2.66 H	101	94.8	7.2
2	*6875.00	91.3 AV			2.66 H	101	84.1	7.2
3	#13750.00	58.3 PK	88.2	-29.9	3.88 H	360	43.2	15.1
4	#13750.00	48.6 AV	68.2	-19.6	3.88 H	360	33.5	15.1
5	20625.00	57.8 PK	74.0	-16.2	3.56 H	19	61.1	-3.3
6	20625.00	45.5 AV	54.0	-8.5	3.56 H	19	48.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	104.0 PK			1.90 V	169	96.8	7.2
2	*6875.00	92.6 AV			1.90 V	169	85.4	7.2
3	#13750.00	57.3 PK	88.2	-30.9	3.63 V	67	42.2	15.1
4	#13750.00	46.8 AV	68.2	-21.4	3.63 V	67	31.7	15.1
5	20625.00	54.1 PK	74.0	-19.9	1.49 V	295	57.4	-3.3
6	20625.00	42.7 AV	54.0	-11.3	1.49 V	295	46.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.7 PK			2.65 H	110	94.7	8.0
2	*6995.00	91.6 AV			2.65 H	110	83.6	8.0
3	#13990.00	58.1 PK	88.2	-30.1	3.89 H	360	42.5	15.6
4	#13990.00	48.3 AV	68.2	-19.9	3.89 H	360	32.7	15.6
5	20985.00	57.8 PK	74.0	-16.2	3.52 H	28	60.6	-2.8
6	20985.00	45.5 AV	54.0	-8.5	3.52 H	28	48.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.5 PK			1.90 V	166	96.5	8.0
2	*6995.00	93.1 AV			1.90 V	166	85.1	8.0
3	#13990.00	57.7 PK	88.2	-30.5	3.54 V	68	42.1	15.6
4	#13990.00	47.3 AV	68.2	-20.9	3.54 V	68	31.7	15.6
5	20985.00	54.5 PK	74.0	-19.5	1.56 V	291	57.3	-2.8
6	20985.00	43.1 AV	54.0	-10.9	1.56 V	291	45.9	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.4 PK			2.62 H	108	92.9	9.5
2	*7115.00	91.5 AV			2.62 H	108	82.0	9.5
3	#7125.00	86.3 PK	88.2	-1.9	2.62 H	108	76.9	9.4
4	#7125.00	56.3 AV	68.2	-11.9	2.62 H	108	46.9	9.4
5	7250.00	55.5 PK	74.0	-18.5	2.62 H	108	46.8	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.62 H	108	35.0	8.7
7	#14230.00	58.0 PK	88.2	-30.2	3.86 H	353	42.7	15.3
8	#14230.00	48.1 AV	68.2	-20.1	3.86 H	353	32.8	15.3
9	21345.00	57.3 PK	74.0	-16.7	3.59 H	31	58.9	-1.6
10	21345.00	45.5 AV	54.0	-8.5	3.59 H	31	47.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	104.5 PK			1.92 V	175	95.0	9.5
2	*7115.00	92.9 AV			1.92 V	175	83.4	9.5
3	#7125.00	86.4 PK	88.2	-1.8	1.92 V	175	77.0	9.4
4	#7125.00	57.5 AV	68.2	-10.7	1.92 V	175	48.1	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.92 V	175	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.92 V	175	34.7	8.7
7	#14230.00	57.4 PK	88.2	-30.8	3.55 V	47	42.1	15.3
8	#14230.00	46.8 AV	68.2	-21.4	3.55 V	47	31.5	15.3
9	21345.00	54.6 PK	74.0	-19.4	1.59 V	307	56.2	-1.6
10	21345.00	43.2 AV	54.0	-10.8	1.59 V	307	44.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.26 H	118	73.7	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.26 H	118	55.6	4.3
3	*5955.00	120.1 PK			2.26 H	118	115.6	4.5
4	*5955.00	109.0 AV			2.26 H	118	104.5	4.5
5	11910.00	59.1 PK	74.0	-14.9	3.82 H	360	46.9	12.2
6	11910.00	49.3 AV	54.0	-4.7	3.82 H	360	37.1	12.2
7	17865.00	57.0 PK	74.0	-17.0	3.58 H	36	35.1	21.9
8	17865.00	45.0 AV	54.0	-9.0	3.58 H	36	23.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	2.17 V	168	73.7	4.3
2	#5925.00	59.9 AV	68.2	-8.3	2.17 V	168	55.6	4.3
3	*5955.00	120.5 PK			2.17 V	168	116.0	4.5
4	*5955.00	109.9 AV			2.17 V	168	105.4	4.5
5	11910.00	58.1 PK	74.0	-15.9	3.61 V	61	45.9	12.2
6	11910.00	48.0 AV	54.0	-6.0	3.61 V	61	35.8	12.2
7	17865.00	54.2 PK	74.0	-19.8	1.54 V	311	32.3	21.9
8	17865.00	43.0 AV	54.0	-11.0	1.54 V	311	21.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.9 PK			2.26 H	119	115.1	4.8
2	*6195.00	108.7 AV			2.26 H	119	103.9	4.8
3	12390.00	58.8 PK	74.0	-15.2	3.91 H	360	46.5	12.3
4	12390.00	48.7 AV	54.0	-5.3	3.91 H	360	36.4	12.3
5	18585.00	57.8 PK	74.0	-16.2	3.67 H	10	62.8	-5.0
6	18585.00	45.3 AV	54.0	-8.7	3.67 H	10	50.3	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.8 PK			2.14 V	162	115.0	4.8
2	*6195.00	109.5 AV			2.14 V	162	104.7	4.8
3	12390.00	57.9 PK	74.0	-16.1	3.60 V	60	45.6	12.3
4	12390.00	47.9 AV	54.0	-6.1	3.60 V	60	35.6	12.3
5	18585.00	54.8 PK	74.0	-19.2	1.48 V	313	59.8	-5.0
6	18585.00	43.1 AV	54.0	-10.9	1.48 V	313	48.1	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.2 PK			2.21 H	114	113.8	6.4
2	*6415.00	109.0 AV			2.21 H	114	102.6	6.4
3	#12830.00	58.5 PK	88.2	-29.7	3.81 H	349	45.5	13.0
4	#12830.00	48.9 AV	68.2	-19.3	3.81 H	349	35.9	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.63 H	11	60.4	-3.8
6	19245.00	44.6 AV	54.0	-9.4	3.63 H	11	48.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.1 PK			2.16 V	170	113.7	6.4
2	*6415.00	109.5 AV			2.16 V	170	103.1	6.4
3	#12830.00	57.4 PK	88.2	-30.8	3.66 V	70	44.4	13.0
4	#12830.00	47.5 AV	68.2	-20.7	3.66 V	70	34.5	13.0
5	19245.00	54.6 PK	74.0	-19.4	1.49 V	337	58.4	-3.8
6	19245.00	43.1 AV	54.0	-10.9	1.49 V	337	46.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.8 PK			2.97 H	227	95.4	6.4
2	*6435.00	91.3 AV			2.97 H	227	84.9	6.4
3	#12870.00	58.2 PK	88.2	-30.0	3.94 H	360	45.2	13.0
4	#12870.00	48.3 AV	68.2	-19.9	3.94 H	360	35.3	13.0
5	19305.00	57.2 PK	74.0	-16.8	3.53 H	38	60.9	-3.7
6	19305.00	45.0 AV	54.0	-9.0	3.53 H	38	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.6 PK			1.94 V	158	96.2	6.4
2	*6435.00	92.9 AV			1.94 V	158	86.5	6.4
3	#12870.00	58.0 PK	88.2	-30.2	3.62 V	72	45.0	13.0
4	#12870.00	47.2 AV	68.2	-21.0	3.62 V	72	34.2	13.0
5	19305.00	53.7 PK	74.0	-20.3	1.53 V	301	57.4	-3.7
6	19305.00	42.9 AV	54.0	-11.1	1.53 V	301	46.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.1 PK			2.26 H	120	113.5	6.6
2	*6475.00	108.7 AV			2.26 H	120	102.1	6.6
3	#12950.00	58.7 PK	88.2	-29.5	3.83 H	352	45.6	13.1
4	#12950.00	48.8 AV	68.2	-19.4	3.83 H	352	35.7	13.1
5	19425.00	57.8 PK	74.0	-16.2	3.66 H	8	61.6	-3.8
6	19425.00	45.6 AV	54.0	-8.4	3.66 H	8	49.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.0 PK			2.12 V	165	114.4	6.6
2	*6475.00	110.1 AV			2.12 V	165	103.5	6.6
3	#12950.00	57.5 PK	88.2	-30.7	3.62 V	54	44.4	13.1
4	#12950.00	47.4 AV	68.2	-20.8	3.62 V	54	34.3	13.1
5	19425.00	54.4 PK	74.0	-19.6	1.48 V	334	58.2	-3.8
6	19425.00	43.2 AV	54.0	-10.8	1.48 V	334	47.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.0 PK			2.97 H	243	95.1	6.9
2	*6515.00	91.5 AV			2.97 H	243	84.6	6.9
3	#13030.00	58.2 PK	88.2	-30.0	3.85 H	360	45.0	13.2
4	#13030.00	48.7 AV	68.2	-19.5	3.85 H	360	35.5	13.2
5	19545.00	57.2 PK	74.0	-16.8	3.60 H	27	61.3	-4.1
6	19545.00	45.1 AV	54.0	-8.9	3.60 H	27	49.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.5 PK			2.00 V	172	95.6	6.9
2	*6515.00	92.4 AV			2.00 V	172	85.5	6.9
3	#13030.00	58.0 PK	88.2	-30.2	3.59 V	62	44.8	13.2
4	#13030.00	47.0 AV	68.2	-21.2	3.59 V	62	33.8	13.2
5	19545.00	54.5 PK	74.0	-19.5	1.51 V	312	58.6	-4.1
6	19545.00	43.2 AV	54.0	-10.8	1.51 V	312	47.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.5 PK			2.22 H	114	113.6	6.9
2	*6535.00	109.2 AV			2.22 H	114	102.3	6.9
3	#13070.00	58.3 PK	88.2	-29.9	3.85 H	353	45.1	13.2
4	#13070.00	48.6 AV	68.2	-19.6	3.85 H	353	35.4	13.2
5	19605.00	57.1 PK	74.0	-16.9	3.59 H	29	61.1	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.59 H	29	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.5 PK			2.19 V	173	113.6	6.9
2	*6535.00	109.7 AV			2.19 V	173	102.8	6.9
3	#13070.00	58.1 PK	88.2	-30.1	3.65 V	76	44.9	13.2
4	#13070.00	47.6 AV	68.2	-20.6	3.65 V	76	34.4	13.2
5	19605.00	55.0 PK	74.0	-19.0	1.51 V	329	59.0	-4.0
6	19605.00	43.7 AV	54.0	-10.3	1.51 V	329	47.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.1 PK			2.28 H	105	112.9	7.2
2	*6695.00	108.7 AV			2.28 H	105	101.5	7.2
3	13390.00	58.4 PK	74.0	-15.6	3.87 H	343	44.4	14.0
4	13390.00	48.8 AV	54.0	-5.2	3.87 H	343	34.8	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.59 H	33	61.0	-3.5
6	20085.00	45.4 AV	54.0	-8.6	3.59 H	33	48.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.0 PK			2.23 V	165	112.8	7.2
2	*6695.00	109.4 AV			2.23 V	165	102.2	7.2
3	13390.00	57.8 PK	74.0	-16.2	3.63 V	66	43.8	14.0
4	13390.00	47.3 AV	54.0	-6.7	3.63 V	66	33.3	14.0
5	20085.00	54.2 PK	74.0	-19.8	1.53 V	311	57.7	-3.5
6	20085.00	43.0 AV	54.0	-11.0	1.53 V	311	46.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.1 PK			2.27 H	112	112.9	7.2
2	*6855.00	108.8 AV			2.27 H	112	101.6	7.2
3	#13710.00	58.4 PK	88.2	-29.8	3.89 H	360	43.2	15.2
4	#13710.00	48.5 AV	68.2	-19.7	3.89 H	360	33.3	15.2
5	20565.00	57.7 PK	74.0	-16.3	3.59 H	29	61.0	-3.3
6	20565.00	45.4 AV	54.0	-8.6	3.59 H	29	48.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.9 PK			2.14 V	156	113.7	7.2
2	*6855.00	110.3 AV			2.14 V	156	103.1	7.2
3	#13710.00	57.3 PK	88.2	-30.9	3.57 V	60	42.1	15.2
4	#13710.00	47.2 AV	68.2	-21.0	3.57 V	60	32.0	15.2
5	20565.00	55.3 PK	74.0	-18.7	1.45 V	313	58.6	-3.3
6	20565.00	43.7 AV	54.0	-10.3	1.45 V	313	47.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			2.97 H	228	95.2	7.2
2	*6875.00	91.6 AV			2.97 H	228	84.4	7.2
3	#13750.00	57.9 PK	88.2	-30.3	3.88 H	360	42.8	15.1
4	#13750.00	48.3 AV	68.2	-19.9	3.88 H	360	33.2	15.1
5	20625.00	57.3 PK	74.0	-16.7	3.63 H	18	60.6	-3.3
6	20625.00	45.3 AV	54.0	-8.7	3.63 H	18	48.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.9 PK			1.94 V	183	95.7	7.2
2	*6875.00	92.8 AV			1.94 V	183	85.6	7.2
3	#13750.00	57.2 PK	88.2	-31.0	3.62 V	65	42.1	15.1
4	#13750.00	46.7 AV	68.2	-21.5	3.62 V	65	31.6	15.1
5	20625.00	53.8 PK	74.0	-20.2	1.49 V	293	57.1	-3.3
6	20625.00	42.8 AV	54.0	-11.2	1.49 V	293	46.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.9 PK			2.97 H	228	93.9	8.0
2	*6995.00	91.2 AV			2.97 H	228	83.2	8.0
3	#13990.00	58.1 PK	88.2	-30.1	3.90 H	360	42.5	15.6
4	#13990.00	48.2 AV	68.2	-20.0	3.90 H	360	32.6	15.6
5	20985.00	56.7 PK	74.0	-17.3	3.54 H	32	59.5	-2.8
6	20985.00	44.8 AV	54.0	-9.2	3.54 H	32	47.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.1 PK			1.99 V	167	94.1	8.0
2	*6995.00	92.4 AV			1.99 V	167	84.4	8.0
3	#13990.00	58.3 PK	88.2	-29.9	3.60 V	47	42.7	15.6
4	#13990.00	47.4 AV	68.2	-20.8	3.60 V	47	31.8	15.6
5	20985.00	53.5 PK	74.0	-20.5	1.52 V	308	56.3	-2.8
6	20985.00	42.5 AV	54.0	-11.5	1.52 V	308	45.3	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.7 PK			2.97 H	241	92.2	9.5
2	*7115.00	91.2 AV			2.97 H	241	81.7	9.5
3	#7125.00	85.5 PK	88.2	-2.7	2.97 H	241	76.1	9.4
4	#7125.00	57.2 AV	68.2	-11.0	2.97 H	241	47.8	9.4
5	7250.00	54.7 PK	74.0	-19.3	2.97 H	241	46.0	8.7
6	7250.00	43.3 AV	54.0	-10.7	2.97 H	241	34.6	8.7
7	#14230.00	57.9 PK	88.2	-30.3	3.90 H	360	42.6	15.3
8	#14230.00	48.0 AV	68.2	-20.2	3.90 H	360	32.7	15.3
9	21345.00	57.5 PK	74.0	-16.5	3.59 H	41	59.1	-1.6
10	21345.00	45.4 AV	54.0	-8.6	3.59 H	41	47.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			1.96 V	174	92.8	9.5
2	*7115.00	92.5 AV			1.96 V	174	83.0	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.96 V	174	77.1	9.4
4	#7125.00	58.6 AV	68.2	-9.6	1.96 V	174	49.2	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.96 V	174	46.1	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.96 V	174	34.8	8.7
7	#14230.00	57.0 PK	88.2	-31.2	3.64 V	72	41.7	15.3
8	#14230.00	46.5 AV	68.2	-21.7	3.64 V	72	31.2	15.3
9	21345.00	53.9 PK	74.0	-20.1	1.55 V	292	55.5	-1.6
10	21345.00	43.0 AV	54.0	-11.0	1.55 V	292	44.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.1 PK	88.2	-13.1	1.00 H	0	70.8	4.3
2	#5925.00	50.8 AV	68.2	-17.4	1.00 H	0	46.5	4.3
3	*5955.00	119.8 PK			2.33 H	132	115.3	4.5
4	*5955.00	109.6 AV			2.33 H	132	105.1	4.5
5	11910.00	50.9 PK	74.0	-23.1	3.85 H	360	38.7	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.85 H	360	26.3	12.2
7	17865.00	55.4 PK	74.0	-18.6	3.80 H	297	33.5	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.80 H	297	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	75.8 PK	88.2	-12.4	1.00 V	0	71.5	4.3
2	#5925.00	53.2 AV	68.2	-15.0	1.00 V	0	48.9	4.3
3	*5955.00	120.8 PK			1.39 V	157	116.3	4.5
4	*5955.00	111.0 AV			1.39 V	157	106.5	4.5
5	11910.00	50.7 PK	74.0	-23.3	3.18 V	342	38.5	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.18 V	342	26.1	12.2
7	17865.00	54.0 PK	74.0	-20.0	3.45 V	152	32.1	21.9
8	17865.00	41.0 AV	54.0	-13.0	3.45 V	152	19.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.3 PK			2.45 H	113	95.7	6.6
2	*6475.00	91.5 AV			2.45 H	113	84.9	6.6
3	#12950.00	57.6 PK	88.2	-30.6	3.92 H	360	44.5	13.1
4	#12950.00	48.1 AV	68.2	-20.1	3.92 H	360	35.0	13.1
5	19425.00	56.4 PK	74.0	-17.6	3.56 H	43	60.2	-3.8
6	19425.00	44.7 AV	54.0	-9.3	3.56 H	43	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.0 PK			1.98 V	160	96.4	6.6
2	*6475.00	92.4 AV			1.98 V	160	85.8	6.6
3	#12950.00	57.5 PK	88.2	-30.7	3.59 V	57	44.4	13.1
4	#12950.00	46.5 AV	68.2	-21.7	3.59 V	57	33.4	13.1
5	19425.00	53.9 PK	74.0	-20.1	1.52 V	282	57.7	-3.8
6	19425.00	43.2 AV	54.0	-10.8	1.52 V	282	47.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.7 PK			2.49 H	111	95.5	7.2
2	*6695.00	91.9 AV			2.49 H	111	84.7	7.2
3	13390.00	57.0 PK	74.0	-17.0	3.91 H	360	43.0	14.0
4	13390.00	47.6 AV	54.0	-6.4	3.91 H	360	33.6	14.0
5	20085.00	56.7 PK	74.0	-17.3	3.61 H	57	60.2	-3.5
6	20085.00	44.8 AV	54.0	-9.2	3.61 H	57	48.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.9 PK			1.97 V	160	95.7	7.2
2	*6695.00	92.5 AV			1.97 V	160	85.3	7.2
3	13390.00	57.9 PK	74.0	-16.1	3.60 V	50	43.9	14.0
4	13390.00	46.7 AV	54.0	-7.3	3.60 V	50	32.7	14.0
5	20085.00	54.1 PK	74.0	-19.9	1.47 V	270	57.6	-3.5
6	20085.00	43.6 AV	54.0	-10.4	1.47 V	270	47.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.3 PK			2.51 H	123	92.8	9.5
2	*7115.00	91.6 AV			2.51 H	123	82.1	9.5
3	#7125.00	64.7 PK	88.2	-23.5	2.51 H	123	55.3	9.4
4	#7125.00	44.3 AV	68.2	-23.9	2.51 H	123	34.9	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.51 H	123	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	2.51 H	123	34.7	8.7
7	#14230.00	58.0 PK	88.2	-30.2	3.90 H	360	42.7	15.3
8	#14230.00	48.3 AV	68.2	-19.9	3.90 H	360	33.0	15.3
9	21345.00	56.7 PK	74.0	-17.3	3.59 H	34	58.3	-1.6
10	21345.00	44.8 AV	54.0	-9.2	3.59 H	34	46.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.6 PK			1.96 V	175	94.1	9.5
2	*7115.00	92.8 AV			1.96 V	175	83.3	9.5
3	#7125.00	64.8 PK	88.2	-23.4	1.96 V	175	55.4	9.4
4	#7125.00	44.6 AV	68.2	-23.6	1.96 V	175	35.2	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.96 V	175	46.8	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.96 V	175	34.7	8.7
7	#14230.00	57.8 PK	88.2	-30.4	3.53 V	53	42.5	15.3
8	#14230.00	47.0 AV	68.2	-21.2	3.53 V	53	31.7	15.3
9	21345.00	54.0 PK	74.0	-20.0	1.57 V	290	55.6	-1.6
10	21345.00	43.2 AV	54.0	-10.8	1.57 V	290	44.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.0 PK	88.2	-15.2	1.00 H	0	68.7	4.3
2	#5925.00	54.4 AV	68.2	-13.8	1.00 H	0	50.1	4.3
3	*5955.00	117.0 PK			2.22 H	132	112.5	4.5
4	*5955.00	107.1 AV			2.22 H	132	102.6	4.5
5	11910.00	51.5 PK	74.0	-22.5	3.85 H	356	39.3	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.85 H	356	26.5	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.79 H	309	34.4	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.79 H	309	22.9	21.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	1.00 V	0	69.3	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.00 V	0	53.6	4.3
3	*5955.00	119.3 PK			1.47 V	199	114.8	4.5
4	*5955.00	108.7 AV			1.47 V	199	104.2	4.5
5	11910.00	50.9 PK	74.0	-23.1	3.28 V	328	38.7	12.2
6	11910.00	38.5 AV	54.0	-15.5	3.28 V	328	26.3	12.2
7	17865.00	54.3 PK	74.0	-19.7	3.55 V	131	32.4	21.9
8	17865.00	41.4 AV	54.0	-12.6	3.55 V	131	19.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.5 PK			2.90 H	227	93.9	6.6
2	*6475.00	89.9 AV			2.90 H	227	83.3	6.6
3	#12950.00	57.9 PK	88.2	-30.3	3.86 H	358	44.8	13.1
4	#12950.00	48.1 AV	68.2	-20.1	3.86 H	358	35.0	13.1
5	19425.00	57.5 PK	74.0	-16.5	3.60 H	8	61.3	-3.8
6	19425.00	45.5 AV	54.0	-8.5	3.60 H	8	49.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.0 PK			1.15 V	17	95.4	6.6
2	*6475.00	91.3 AV			1.15 V	17	84.7	6.6
3	#12950.00	57.6 PK	88.2	-30.6	3.53 V	82	44.5	13.1
4	#12950.00	46.8 AV	68.2	-21.4	3.53 V	82	33.7	13.1
5	19425.00	53.8 PK	74.0	-20.2	1.48 V	297	57.6	-3.8
6	19425.00	42.8 AV	54.0	-11.2	1.48 V	297	46.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	100.0 PK			2.93 H	228	92.8	7.2
2	*6695.00	89.4 AV			2.93 H	228	82.2	7.2
3	13390.00	57.8 PK	74.0	-16.2	3.87 H	360	43.8	14.0
4	13390.00	48.1 AV	54.0	-5.9	3.87 H	360	34.1	14.0
5	20085.00	57.4 PK	74.0	-16.6	3.57 H	2	60.9	-3.5
6	20085.00	45.1 AV	54.0	-8.9	3.57 H	2	48.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.2 PK			1.12 V	16	95.0	7.2
2	*6695.00	91.2 AV			1.12 V	16	84.0	7.2
3	13390.00	57.5 PK	74.0	-16.5	3.58 V	89	43.5	14.0
4	13390.00	46.9 AV	54.0	-7.1	3.58 V	89	32.9	14.0
5	20085.00	54.1 PK	74.0	-19.9	1.43 V	291	57.6	-3.5
6	20085.00	42.9 AV	54.0	-11.1	1.43 V	291	46.4	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			2.96 H	234	91.5	9.5
2	*7115.00	90.4 AV			2.96 H	234	80.9	9.5
3	#7125.00	85.6 PK	88.2	-2.6	2.96 H	234	76.2	9.4
4	#7125.00	55.5 AV	68.2	-12.7	2.96 H	234	46.1	9.4
5	7250.00	54.9 PK	74.0	-19.1	2.96 H	234	46.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	2.96 H	234	34.8	8.7
7	#14230.00	58.0 PK	88.2	-30.2	3.88 H	357	42.7	15.3
8	#14230.00	48.2 AV	68.2	-20.0	3.88 H	357	32.9	15.3
9	21345.00	57.5 PK	74.0	-16.5	3.60 H	24	59.1	-1.6
10	21345.00	45.3 AV	54.0	-8.7	3.60 H	24	46.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.7 PK			1.20 V	18	92.2	9.5
2	*7115.00	91.1 AV			1.20 V	18	81.6	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.20 V	18	77.1	9.4
4	#7125.00	56.9 AV	68.2	-11.3	1.20 V	18	47.5	9.4
5	7250.00	54.5 PK	74.0	-19.5	1.20 V	18	45.8	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.20 V	18	34.7	8.7
7	#14230.00	57.5 PK	88.2	-30.7	3.55 V	72	42.2	15.3
8	#14230.00	46.9 AV	68.2	-21.3	3.55 V	72	31.6	15.3
9	21345.00	53.8 PK	74.0	-20.2	1.48 V	292	55.4	-1.6
10	21345.00	42.6 AV	54.0	-11.4	1.48 V	292	44.2	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.6 PK	88.2	-10.6	1.00 H	0	73.3	4.3
2	#5925.00	63.8 AV	68.2	-4.4	1.00 H	0	59.5	4.3
3	*5985.00	108.5 PK			2.19 H	134	104.1	4.4
4	*5985.00	97.4 AV			2.19 H	134	93.0	4.4
5	11970.00	51.3 PK	74.0	-22.7	3.87 H	357	39.1	12.2
6	11970.00	38.7 AV	54.0	-15.3	3.87 H	357	26.5	12.2
7	17955.00	56.1 PK	74.0	-17.9	3.79 H	301	32.7	23.4
8	17955.00	44.6 AV	54.0	-9.4	3.79 H	301	21.2	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.9 PK	88.2	-9.3	1.00 V	0	74.6	4.3
2	#5925.00	64.6 AV	68.2	-3.6	1.00 V	0	60.3	4.3
3	*5985.00	110.9 PK			2.08 V	227	106.5	4.4
4	*5985.00	99.0 AV			2.08 V	227	94.6	4.4
5	11970.00	50.6 PK	74.0	-23.4	3.25 V	346	38.4	12.2
6	11970.00	38.2 AV	54.0	-15.8	3.25 V	346	26.0	12.2
7	17955.00	54.4 PK	74.0	-19.6	3.45 V	149	31.0	23.4
8	17955.00	41.1 AV	54.0	-12.9	3.45 V	149	17.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.7 PK			2.56 H	122	97.2	6.5
2	*6465.00	91.4 AV			2.56 H	122	84.9	6.5
3	#12930.00	57.9 PK	88.2	-30.3	3.84 H	360	44.8	13.1
4	#12930.00	48.7 AV	68.2	-19.5	3.84 H	360	35.6	13.1
5	19395.00	56.8 PK	74.0	-17.2	3.52 H	36	60.5	-3.7
6	19395.00	45.2 AV	54.0	-8.8	3.52 H	36	48.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.2 PK			2.17 V	189	96.7	6.5
2	*6465.00	91.4 AV			2.17 V	189	84.9	6.5
3	#12930.00	57.3 PK	88.2	-30.9	3.56 V	54	44.2	13.1
4	#12930.00	46.8 AV	68.2	-21.4	3.56 V	54	33.7	13.1
5	19395.00	54.4 PK	74.0	-19.6	1.51 V	332	58.1	-3.7
6	19395.00	43.1 AV	54.0	-10.9	1.51 V	332	46.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.9 PK			2.51 H	111	96.7	7.2
2	*6705.00	91.6 AV			2.51 H	111	84.4	7.2
3	#13410.00	58.0 PK	88.2	-30.2	3.86 H	352	43.8	14.2
4	#13410.00	48.6 AV	68.2	-19.6	3.86 H	352	34.4	14.2
5	20115.00	56.6 PK	74.0	-17.4	3.47 H	26	60.1	-3.5
6	20115.00	45.2 AV	54.0	-8.8	3.47 H	26	48.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.7 PK			2.11 V	193	96.5	7.2
2	*6705.00	92.2 AV			2.11 V	193	85.0	7.2
3	#13410.00	57.6 PK	88.2	-30.6	3.61 V	50	43.4	14.2
4	#13410.00	46.9 AV	68.2	-21.3	3.61 V	50	32.7	14.2
5	20115.00	53.5 PK	74.0	-20.5	1.55 V	307	57.0	-3.5
6	20115.00	42.2 AV	54.0	-11.8	1.55 V	307	45.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	104.1 PK			2.52 H	125	95.7	8.4
2	*7025.00	91.7 AV			2.52 H	125	83.3	8.4
3	#7125.00	56.8 PK	88.2	-31.4	2.52 H	125	47.4	9.4
4	#7125.00	45.2 AV	68.2	-23.0	2.52 H	125	35.8	9.4
5	7250.00	55.9 PK	74.0	-18.1	2.52 H	125	47.2	8.7
6	7250.00	43.6 AV	54.0	-10.4	2.52 H	125	34.9	8.7
7	#14050.00	58.3 PK	88.2	-29.9	3.89 H	360	42.8	15.5
8	#14050.00	48.8 AV	68.2	-19.4	3.89 H	360	33.3	15.5
9	21075.00	56.8 PK	74.0	-17.2	3.52 H	39	59.0	-2.2
10	21075.00	44.9 AV	54.0	-9.1	3.52 H	39	47.1	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.3 PK			2.13 V	186	94.9	8.4
2	*7025.00	91.7 AV			2.13 V	186	83.3	8.4
3	#7125.00	56.6 PK	88.2	-31.6	2.13 V	186	47.2	9.4
4	#7125.00	45.0 AV	68.2	-23.2	2.13 V	186	35.6	9.4
5	7250.00	55.0 PK	74.0	-19.0	2.13 V	186	46.3	8.7
6	7250.00	43.2 AV	54.0	-10.8	2.13 V	186	34.5	8.7
7	#14050.00	57.4 PK	88.2	-30.8	3.62 V	60	41.9	15.5
8	#14050.00	46.8 AV	68.2	-21.4	3.62 V	60	31.3	15.5
9	21075.00	54.0 PK	74.0	-20.0	1.49 V	320	56.2	-2.2
10	21075.00	42.6 AV	54.0	-11.4	1.49 V	320	44.8	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	2.19 H	133	69.4	4.3
2	#5925.00	59.4 AV	68.2	-8.8	2.19 H	133	55.1	4.3
3	*6025.00	106.2 PK			2.19 H	133	102.0	4.2
4	*6025.00	93.0 AV			2.19 H	133	88.8	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.87 H	347	39.1	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.87 H	347	26.4	12.4
7	18075.00	56.5 PK	74.0	-17.5	3.82 H	286	61.2	-4.7
8	18075.00	44.8 AV	54.0	-9.2	3.82 H	286	49.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.6 PK	88.2	-13.6	1.00 V	0	70.3	4.3
2	#5925.00	59.7 AV	68.2	-8.5	1.00 V	0	55.4	4.3
3	*6025.00	106.1 PK			1.38 V	196	101.9	4.2
4	*6025.00	94.8 AV			1.38 V	196	90.6	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.25 V	337	38.4	12.4
6	12050.00	38.4 AV	54.0	-15.6	3.25 V	337	26.0	12.4
7	18075.00	53.8 PK	74.0	-20.2	3.51 V	135	58.5	-4.7
8	18075.00	40.9 AV	54.0	-13.1	3.51 V	135	45.6	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.2 PK			2.57 H	111	96.4	6.8
2	*6505.00	91.2 AV			2.57 H	111	84.4	6.8
3	#13010.00	58.3 PK	88.2	-29.9	3.86 H	360	45.1	13.2
4	#13010.00	48.4 AV	68.2	-19.8	3.86 H	360	35.2	13.2
5	19515.00	58.4 PK	74.0	-15.6	3.65 H	35	62.5	-4.1
6	19515.00	45.9 AV	54.0	-8.1	3.65 H	35	50.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.4 PK			2.05 V	200	96.6	6.8
2	*6505.00	91.5 AV			2.05 V	200	84.7	6.8
3	#13010.00	58.5 PK	88.2	-29.7	3.54 V	45	45.3	13.2
4	#13010.00	47.3 AV	68.2	-20.9	3.54 V	45	34.1	13.2
5	19515.00	53.6 PK	74.0	-20.4	1.61 V	294	57.7	-4.1
6	19515.00	43.0 AV	54.0	-11.0	1.61 V	294	47.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.2 PK			2.54 H	119	96.0	7.2
2	*6665.00	91.4 AV			2.54 H	119	84.2	7.2
3	13330.00	58.9 PK	74.0	-15.1	3.88 H	359	45.1	13.8
4	13330.00	48.9 AV	54.0	-5.1	3.88 H	359	35.1	13.8
5	19995.00	58.9 PK	74.0	-15.1	3.69 H	38	62.5	-3.6
6	19995.00	46.3 AV	54.0	-7.7	3.69 H	38	49.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.2 PK			2.06 V	205	96.0	7.2
2	*6665.00	91.2 AV			2.06 V	205	84.0	7.2
3	13330.00	58.5 PK	74.0	-15.5	3.52 V	58	44.7	13.8
4	13330.00	47.3 AV	54.0	-6.7	3.52 V	58	33.5	13.8
5	19995.00	54.1 PK	74.0	-19.9	1.64 V	282	57.7	-3.6
6	19995.00	43.3 AV	54.0	-10.7	1.64 V	282	46.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.3 PK			2.54 H	123	95.5	7.8
2	*6985.00	91.6 AV			2.54 H	123	83.8	7.8
3	#7125.00	68.5 PK	88.2	-19.7	2.54 H	123	59.1	9.4
4	#7125.00	51.5 AV	68.2	-16.7	2.54 H	123	42.1	9.4
5	7250.00	55.6 PK	74.0	-18.4	2.54 H	123	46.9	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.54 H	123	35.0	8.7
7	#13970.00	58.3 PK	88.2	-29.9	3.90 H	360	42.8	15.5
8	#13970.00	48.6 AV	68.2	-19.6	3.90 H	360	33.1	15.5
9	20955.00	57.6 PK	74.0	-16.4	3.60 H	25	60.3	-2.7
10	20955.00	45.4 AV	54.0	-8.6	3.60 H	25	48.1	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.5 PK			2.00 V	188	95.7	7.8
2	*6985.00	91.8 AV			2.00 V	188	84.0	7.8
3	#7125.00	70.1 PK	88.2	-18.1	2.00 V	188	60.7	9.4
4	#7125.00	51.8 AV	68.2	-16.4	2.00 V	188	42.4	9.4
5	7250.00	55.7 PK	74.0	-18.3	2.00 V	188	47.0	8.7
6	7250.00	43.8 AV	54.0	-10.2	2.00 V	188	35.1	8.7
7	#13970.00	57.9 PK	88.2	-30.3	3.54 V	51	42.4	15.5
8	#13970.00	46.9 AV	68.2	-21.3	3.54 V	51	31.4	15.5
9	20955.00	53.4 PK	74.0	-20.6	1.57 V	296	56.1	-2.7
10	20955.00	42.6 AV	54.0	-11.4	1.57 V	296	45.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.8 PK	88.2	-9.4	2.20 H	133	74.5	4.3
2	#5925.00	61.3 AV	68.2	-6.9	2.20 H	133	57.0	4.3
3	*6025.00	104.8 PK			2.20 H	133	100.6	4.2
4	*6025.00	93.2 AV			2.20 H	133	89.0	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.86 H	360	39.1	12.4
6	12050.00	39.0 AV	54.0	-15.0	3.86 H	360	26.6	12.4
7	18075.00	56.6 PK	74.0	-17.4	3.79 H	311	61.3	-4.7
8	18075.00	45.1 AV	54.0	-8.9	3.79 H	311	49.8	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.7 PK	88.2	-7.5	1.31 V	198	76.4	4.3
2	#5925.00	63.1 AV	68.2	-5.1	1.31 V	198	58.8	4.3
3	*6025.00	106.4 PK			1.31 V	198	102.2	4.2
4	*6025.00	94.6 AV			1.31 V	198	90.4	4.2
5	12050.00	51.5 PK	74.0	-22.5	3.19 V	322	39.1	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.19 V	322	26.4	12.4
7	18075.00	54.2 PK	74.0	-19.8	3.54 V	132	58.9	-4.7
8	18075.00	41.3 AV	54.0	-12.7	3.54 V	132	46.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.6 PK			2.34 H	142	95.8	6.8
2	*6505.00	90.9 AV			2.34 H	142	84.1	6.8
3	#13010.00	57.3 PK	88.2	-30.9	3.85 H	360	44.1	13.2
4	#13010.00	47.6 AV	68.2	-20.6	3.85 H	360	34.4	13.2
5	19515.00	57.0 PK	74.0	-17.0	3.62 H	17	61.1	-4.1
6	19515.00	45.4 AV	54.0	-8.6	3.62 H	17	49.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.6 PK			1.97 V	167	97.8	6.8
2	*6505.00	91.8 AV			1.97 V	167	85.0	6.8
3	#13010.00	57.3 PK	88.2	-30.9	3.56 V	67	44.1	13.2
4	#13010.00	46.8 AV	68.2	-21.4	3.56 V	67	33.6	13.2
5	19515.00	54.1 PK	74.0	-19.9	1.50 V	283	58.2	-4.1
6	19515.00	43.1 AV	54.0	-10.9	1.50 V	283	47.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.8 PK			2.39 H	143	94.6	7.2
2	*6665.00	90.4 AV			2.39 H	143	83.2	7.2
3	13330.00	57.9 PK	74.0	-16.1	3.81 H	360	44.1	13.8
4	13330.00	48.0 AV	54.0	-6.0	3.81 H	360	34.2	13.8
5	19995.00	57.5 PK	74.0	-16.5	3.63 H	26	61.1	-3.6
6	19995.00	45.7 AV	54.0	-8.3	3.63 H	26	49.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	104.9 PK			1.96 V	152	97.7	7.2
2	*6665.00	92.0 AV			1.96 V	152	84.8	7.2
3	13330.00	57.5 PK	74.0	-16.5	3.50 V	81	43.7	13.8
4	13330.00	47.0 AV	54.0	-7.0	3.50 V	81	33.2	13.8
5	19995.00	54.6 PK	74.0	-19.4	1.52 V	277	58.2	-3.6
6	19995.00	43.3 AV	54.0	-10.7	1.52 V	277	46.9	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.0 PK			2.32 H	126	95.2	7.8
2	*6985.00	91.4 AV			2.32 H	126	83.6	7.8
3	#7125.00	70.3 PK	88.2	-17.9	2.32 H	126	60.9	9.4
4	#7125.00	53.7 AV	68.2	-14.5	2.32 H	126	44.3	9.4
5	7250.00	55.6 PK	74.0	-18.4	2.32 H	126	46.9	8.7
6	7250.00	43.8 AV	54.0	-10.2	2.32 H	126	35.1	8.7
7	#13970.00	57.5 PK	88.2	-30.7	3.88 H	360	42.0	15.5
8	#13970.00	48.0 AV	68.2	-20.2	3.88 H	360	32.5	15.5
9	20955.00	57.5 PK	74.0	-16.5	3.59 H	27	60.2	-2.7
10	20955.00	45.6 AV	54.0	-8.4	3.59 H	27	48.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.3 PK			2.00 V	179	96.5	7.8
2	*6985.00	91.6 AV			2.00 V	179	83.8	7.8
3	#7125.00	68.9 PK	88.2	-19.3	2.00 V	179	59.5	9.4
4	#7125.00	54.8 AV	68.2	-13.4	2.00 V	179	45.4	9.4
5	7250.00	55.2 PK	74.0	-18.8	2.00 V	179	46.5	8.7
6	7250.00	43.7 AV	54.0	-10.3	2.00 V	179	35.0	8.7
7	#13970.00	57.3 PK	88.2	-30.9	3.62 V	62	41.8	15.5
8	#13970.00	46.8 AV	68.2	-21.4	3.62 V	62	31.3	15.5
9	20955.00	53.9 PK	74.0	-20.1	1.51 V	296	56.6	-2.7
10	20955.00	43.0 AV	54.0	-11.0	1.51 V	296	45.7	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode A

2Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

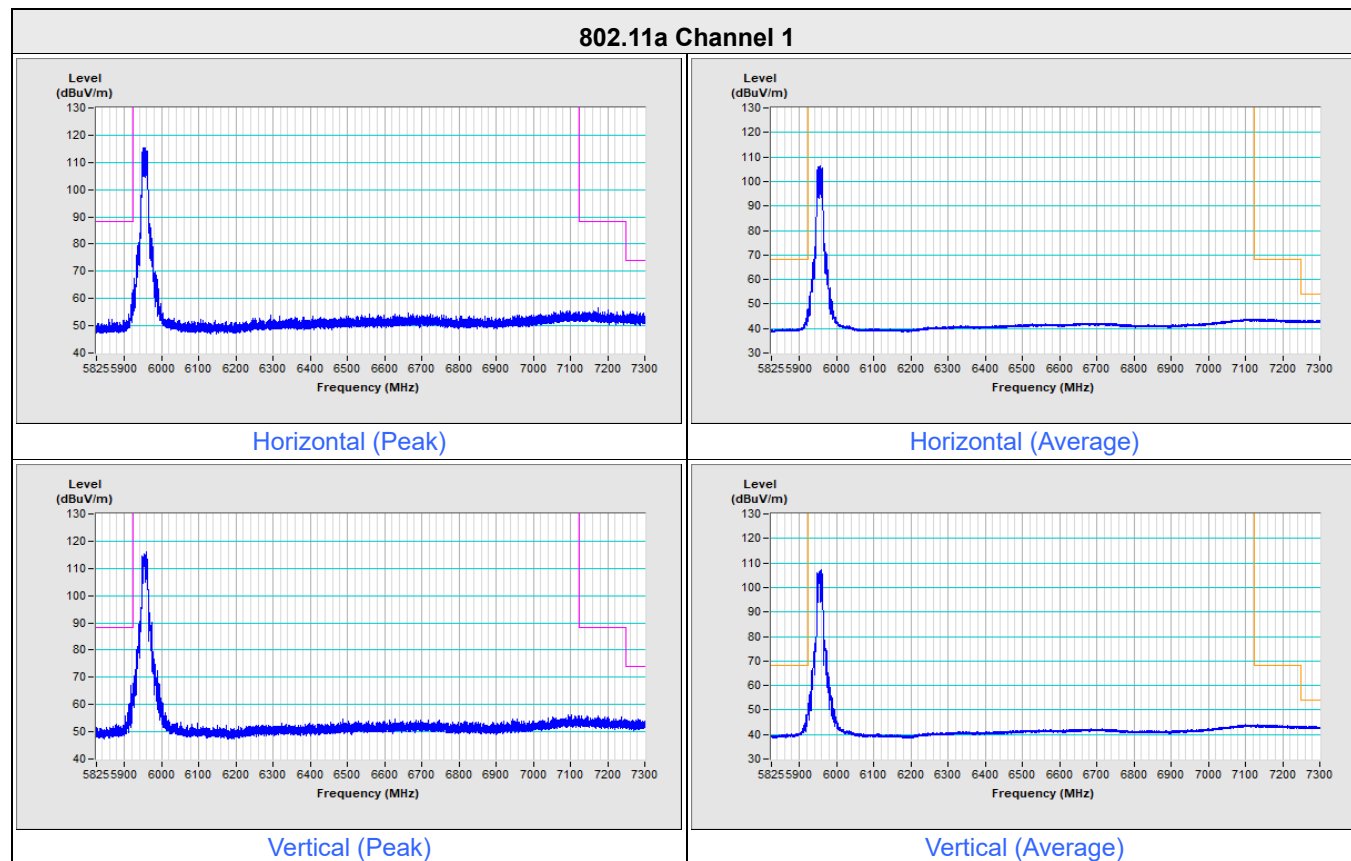


802.11a Channel 233

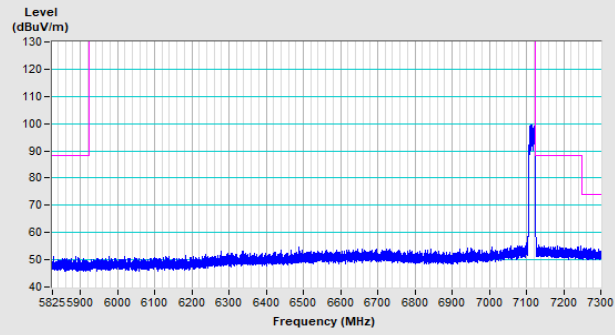


Horizontal (Peak)

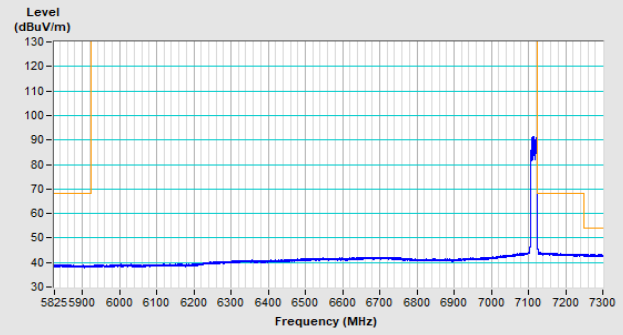

Horizontal (Average)

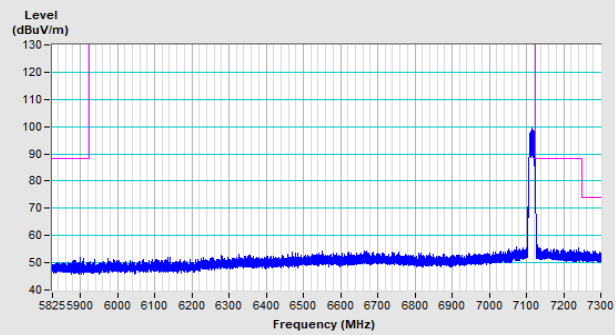


Vertical (Peak)

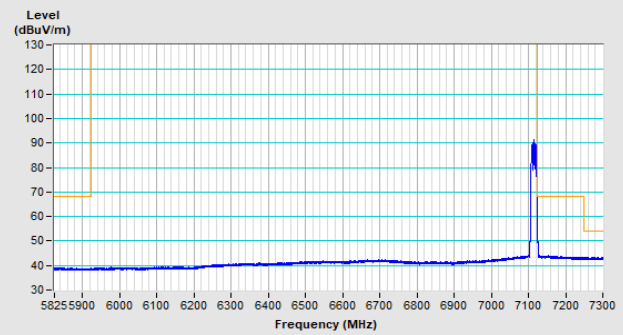


Vertical (Average)

2Tx NSS2


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

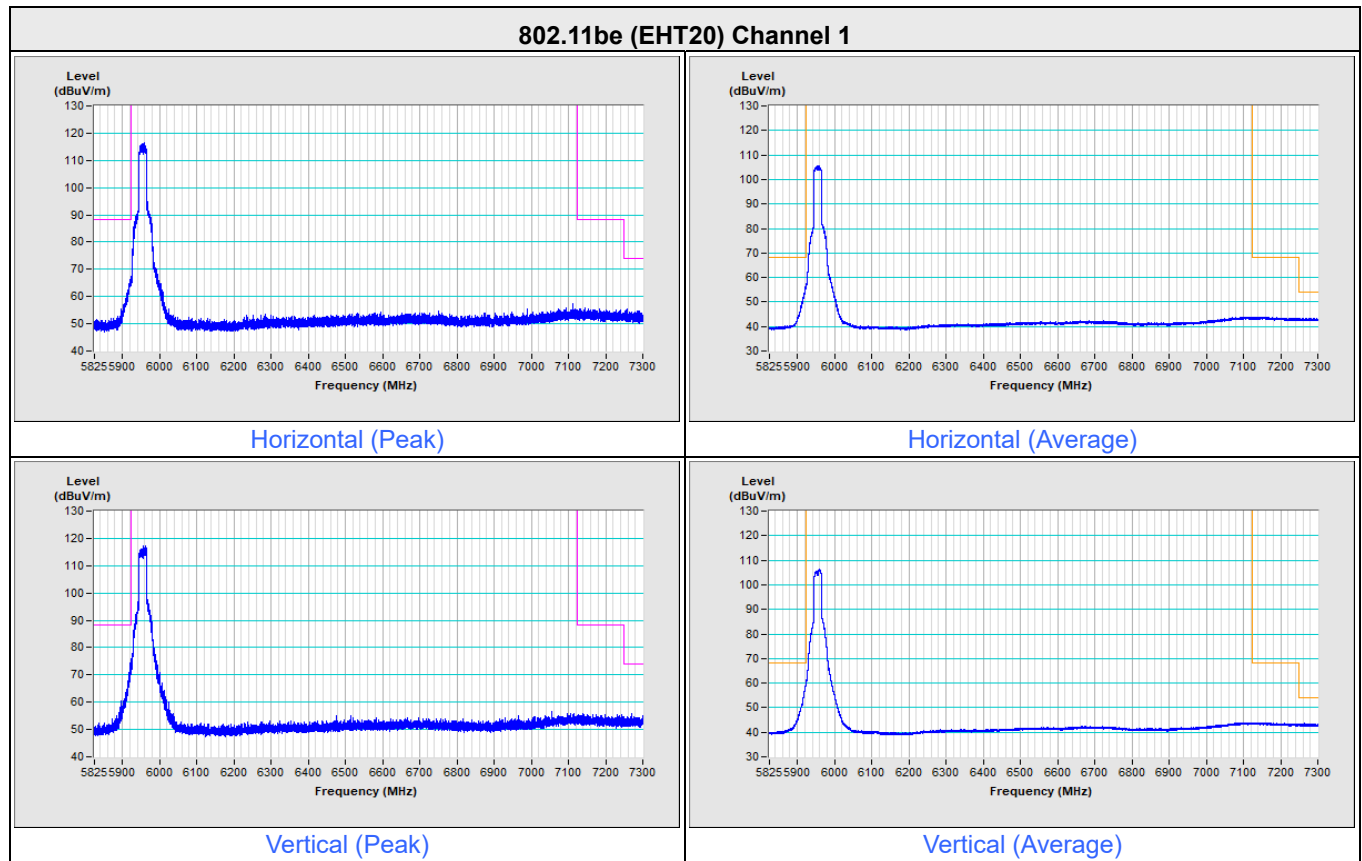

802.11be (EHT20) Channel 233

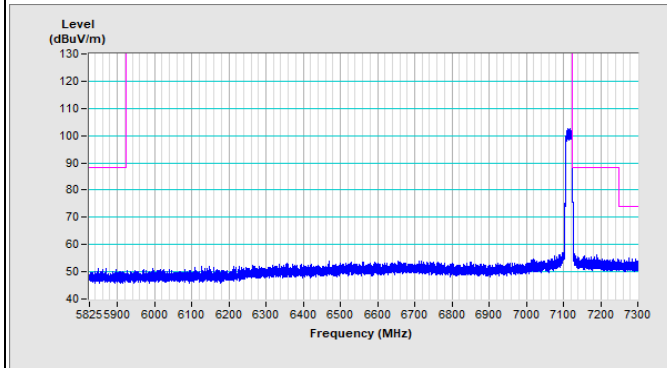

Horizontal (Peak)

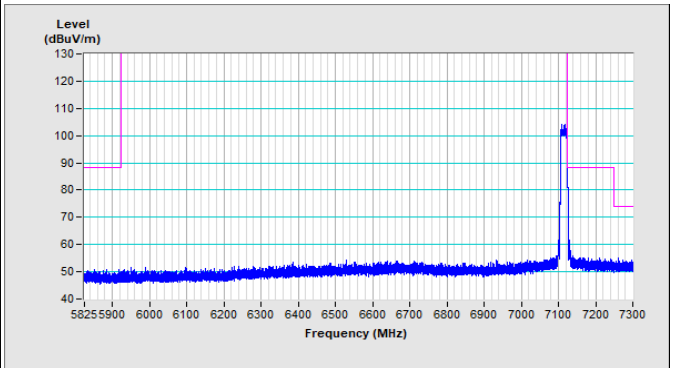


Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233




Horizontal (Average)

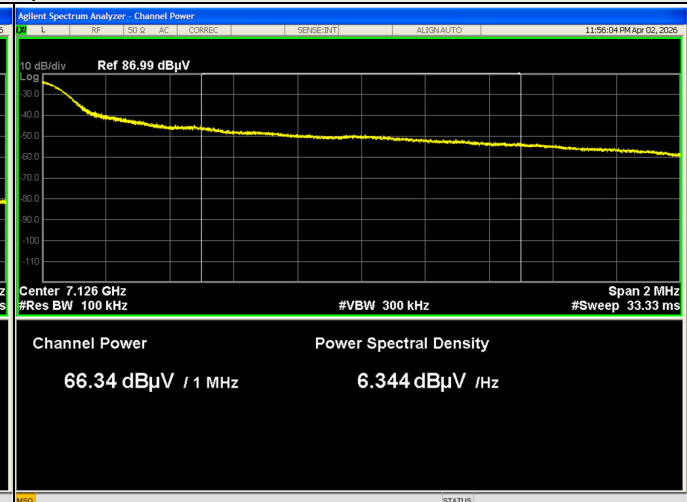


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

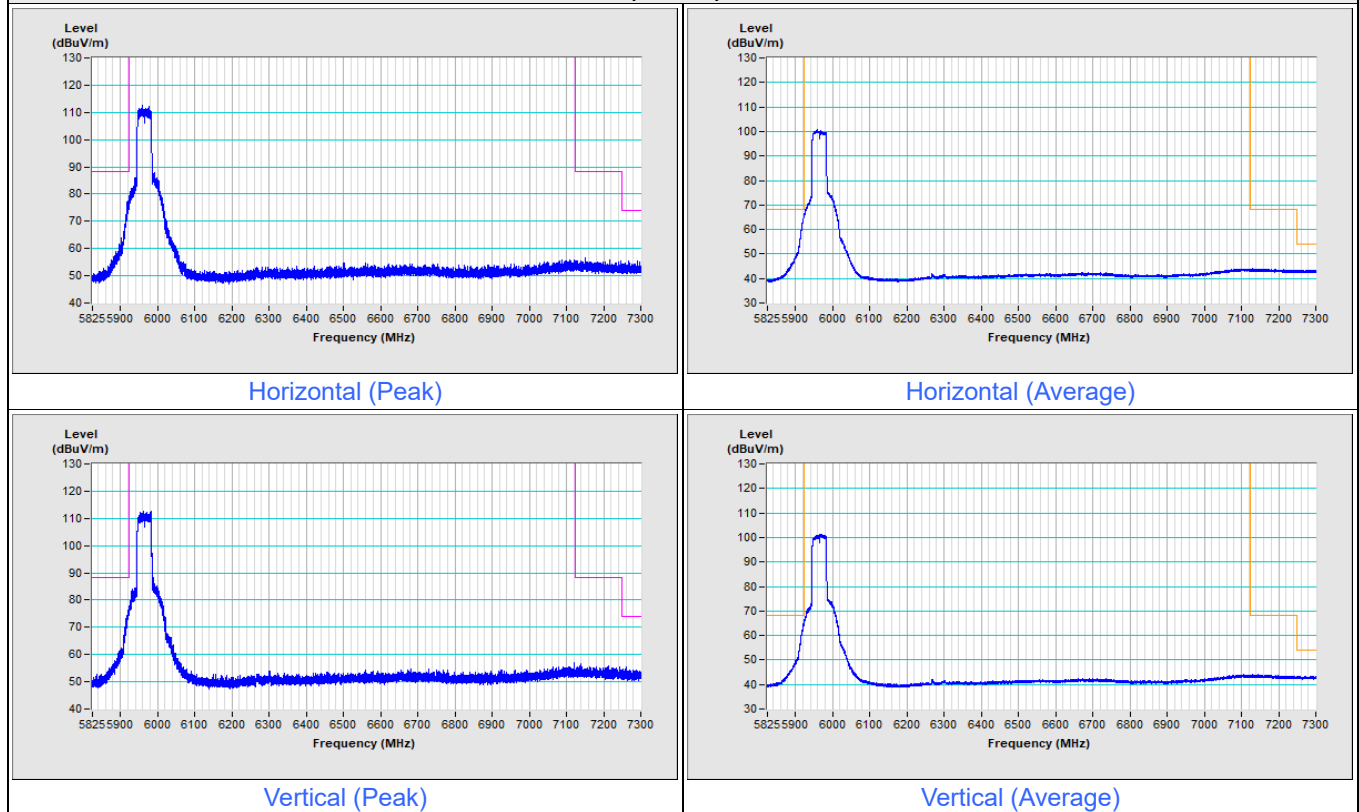


802.11be (EHT40) Channel 227

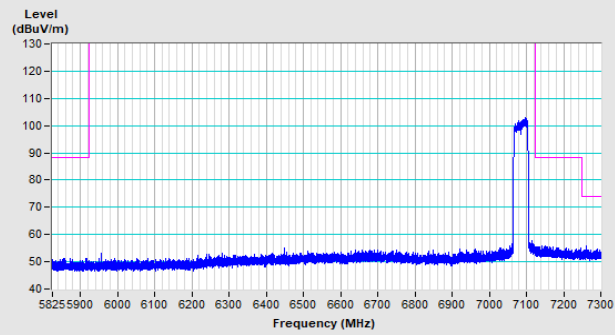


Horizontal (Peak)

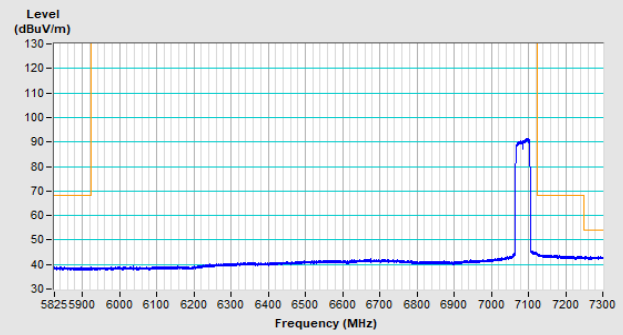

Horizontal (Average)

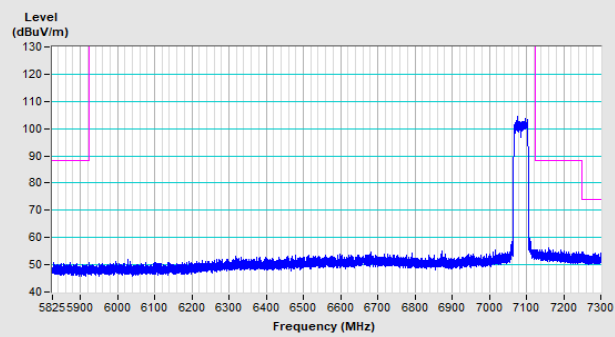


Vertical (Peak)

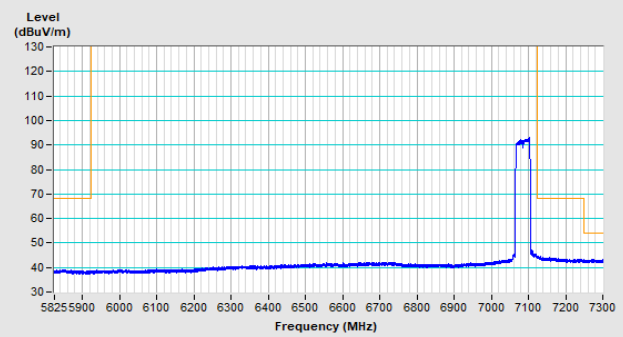


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

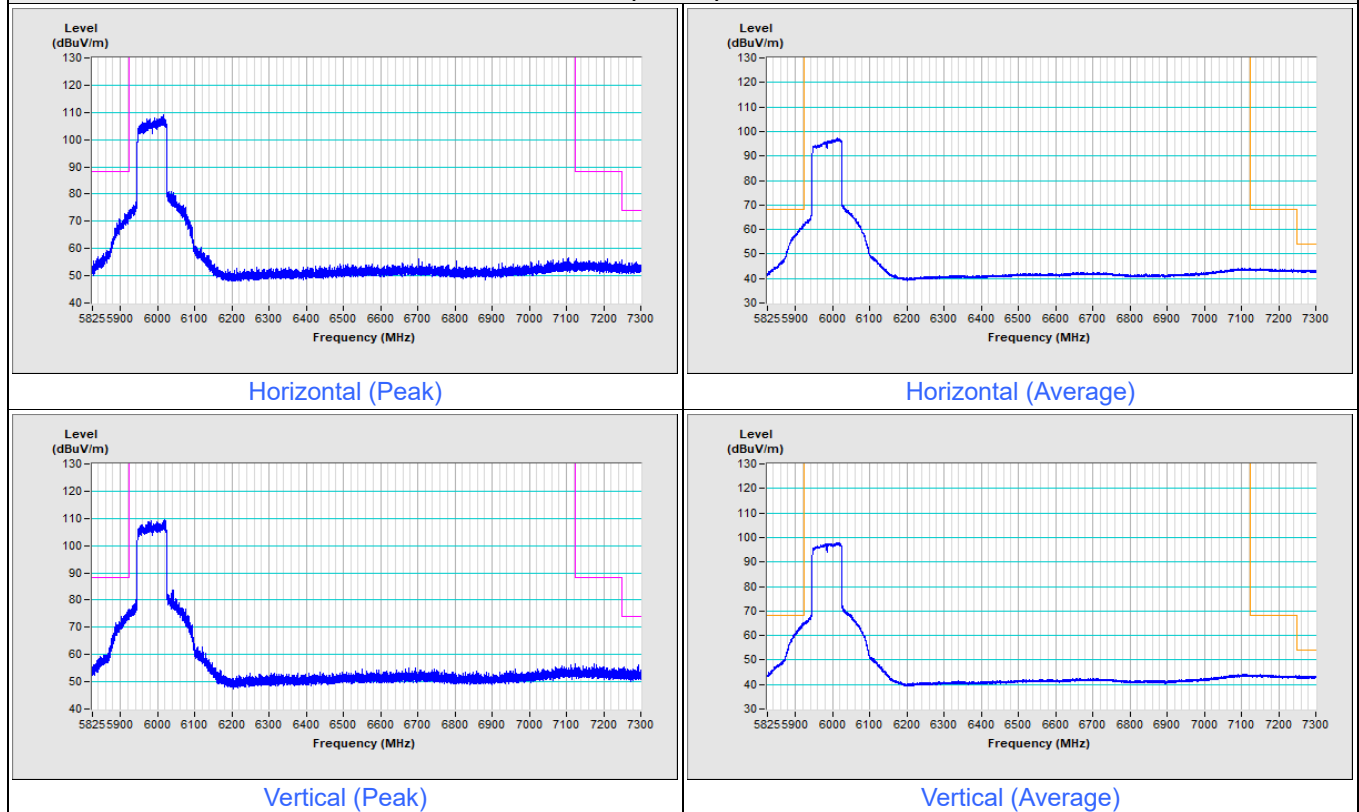


802.11be (EHT80) Channel 215

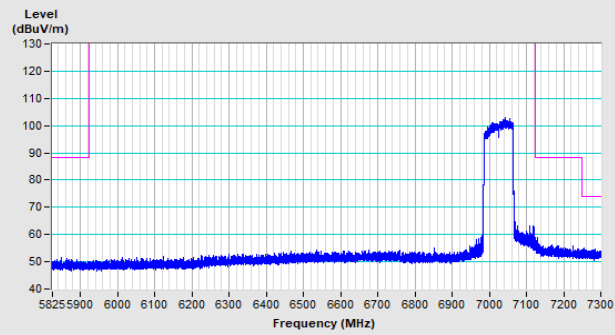


Horizontal (Peak)

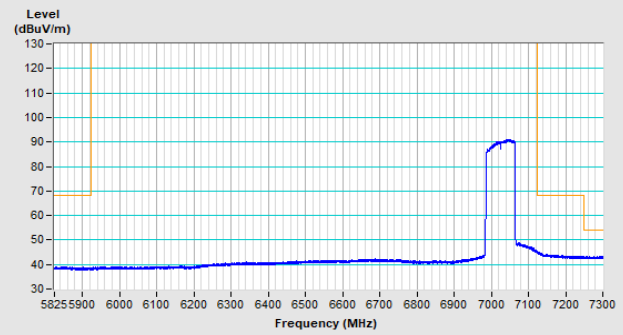

Horizontal (Average)

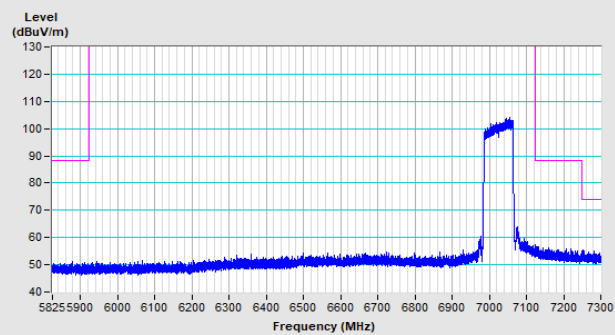


Vertical (Peak)

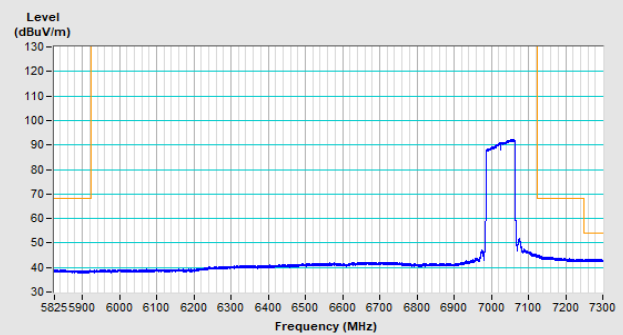


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

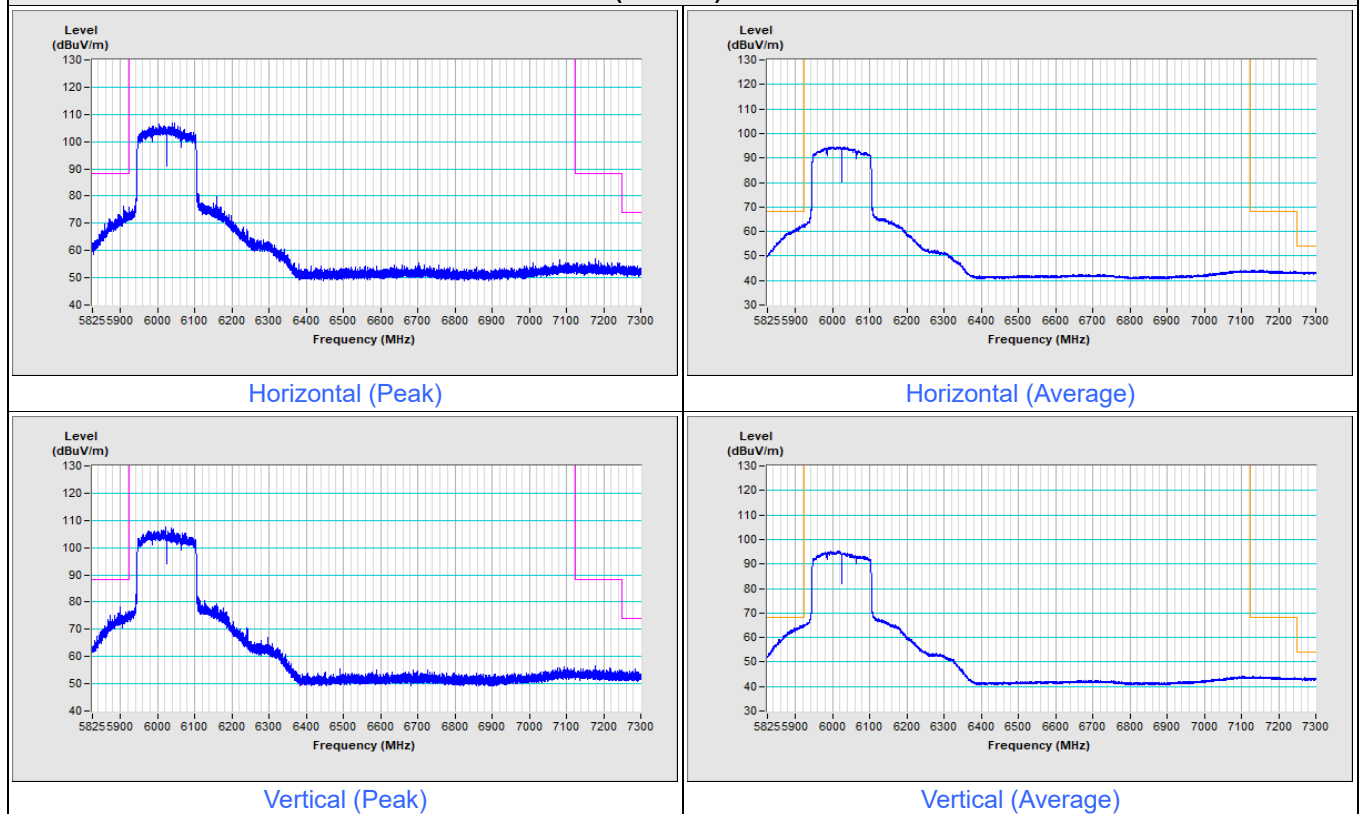


802.11be (EHT160) Channel 207

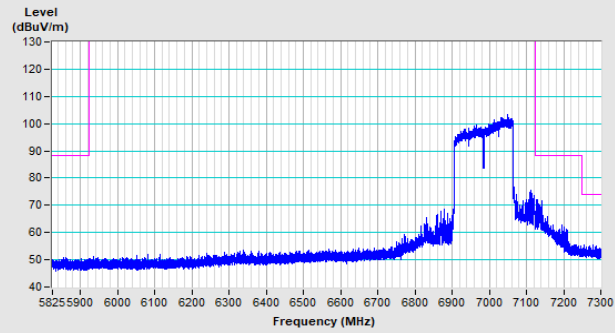


Horizontal (Peak)

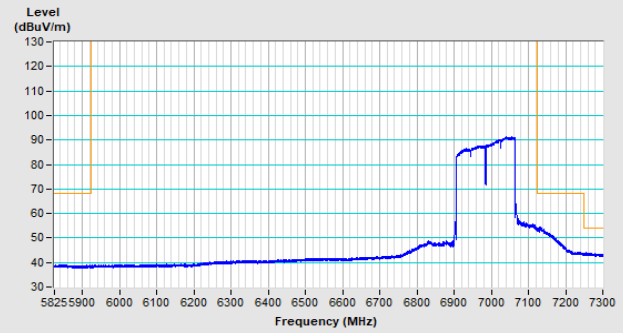

Horizontal (Average)

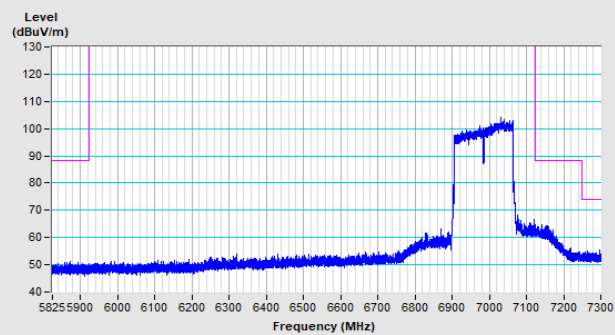


Vertical (Peak)

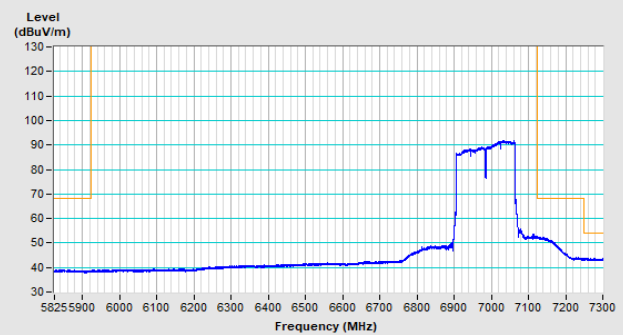


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

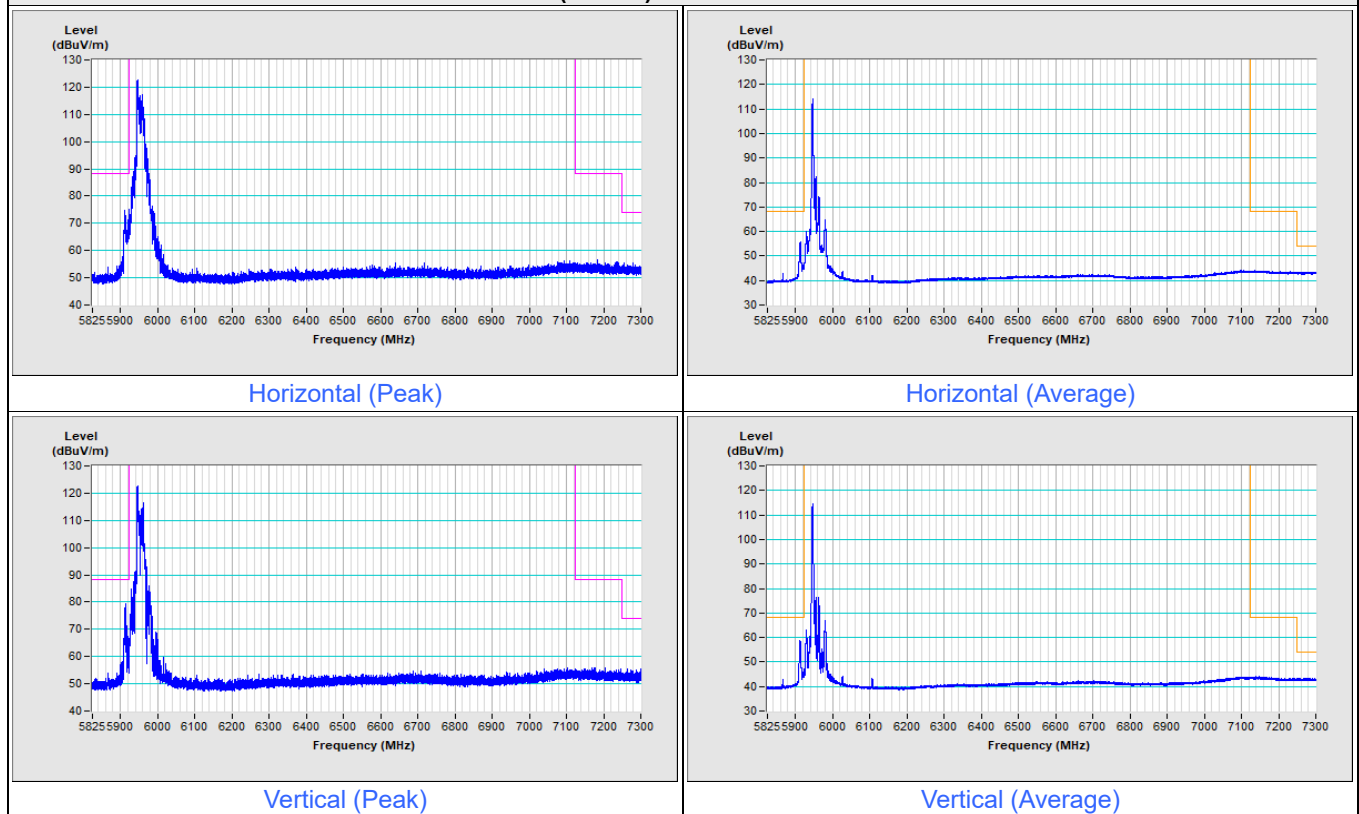

802.11be (EHT20) 26-tone RU Channel 233

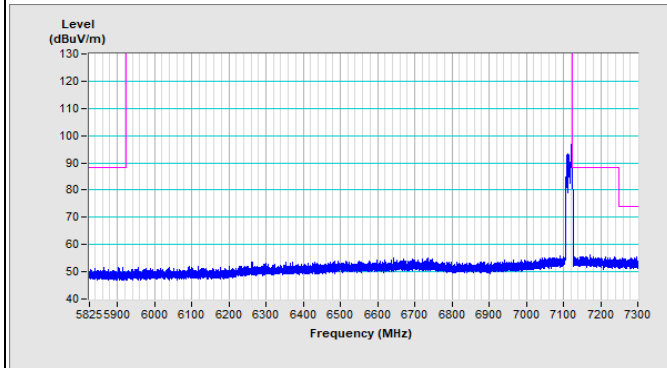

Horizontal (Peak)

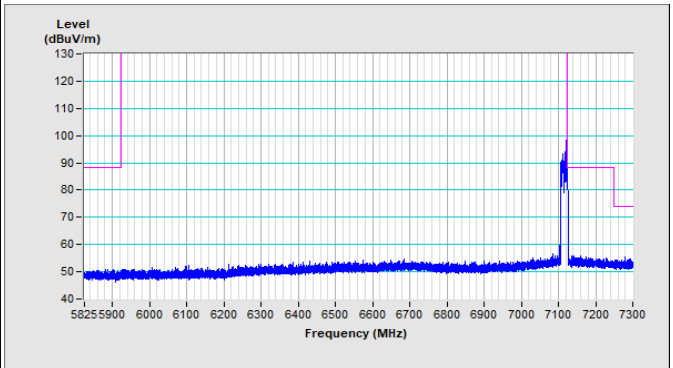


Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233




Horizontal (Average)

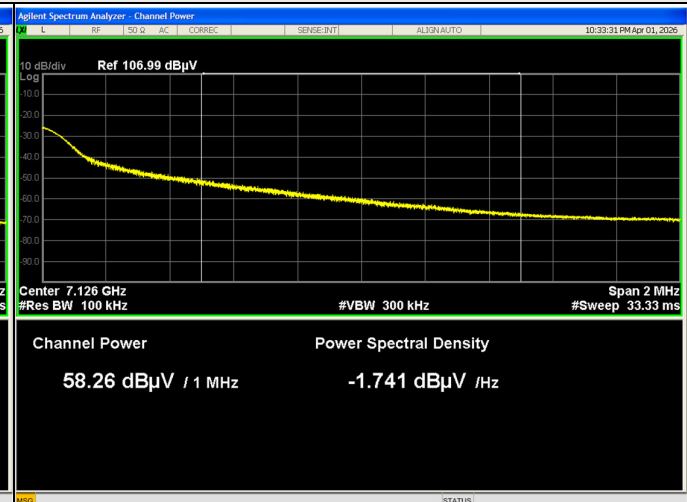


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

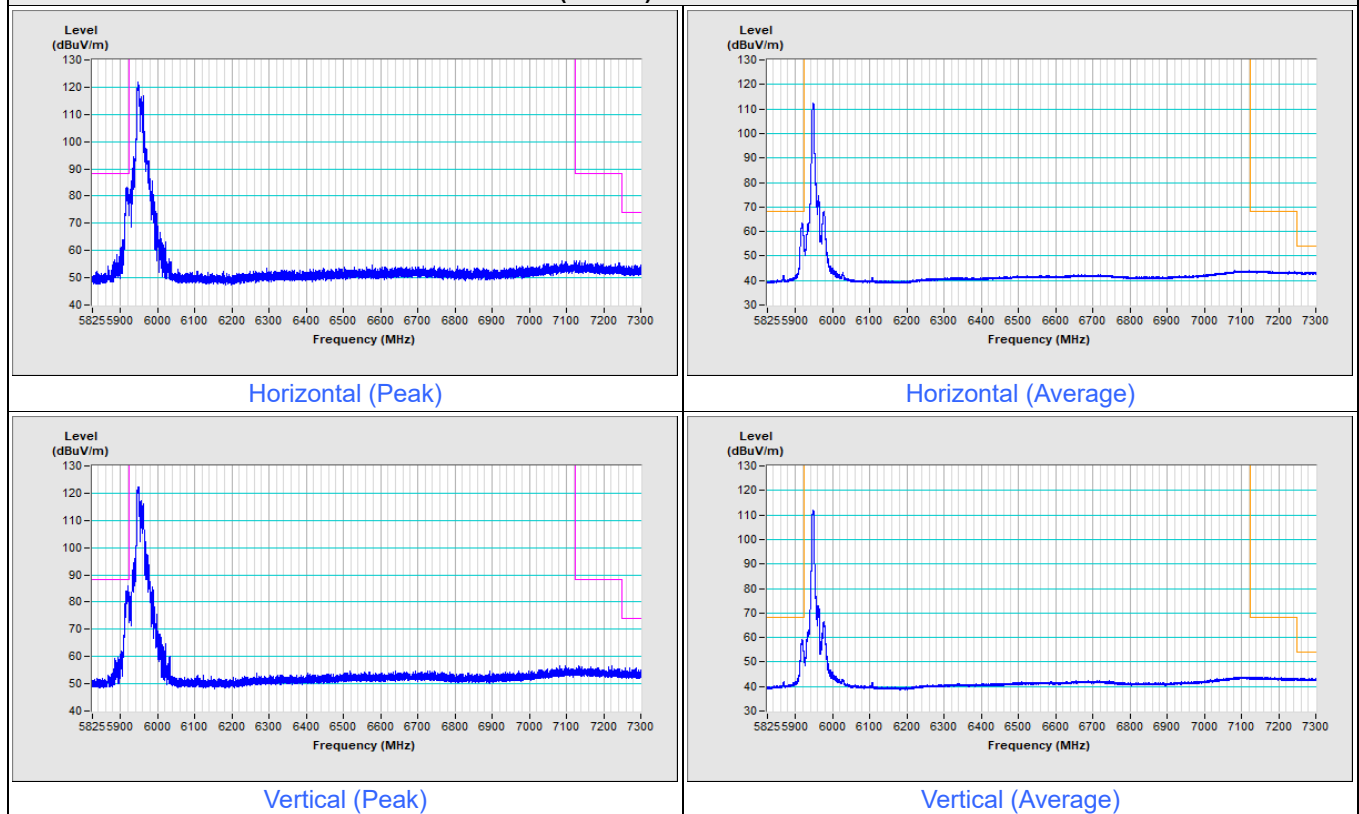

802.11be (EHT20) 52-tone RU Channel 233

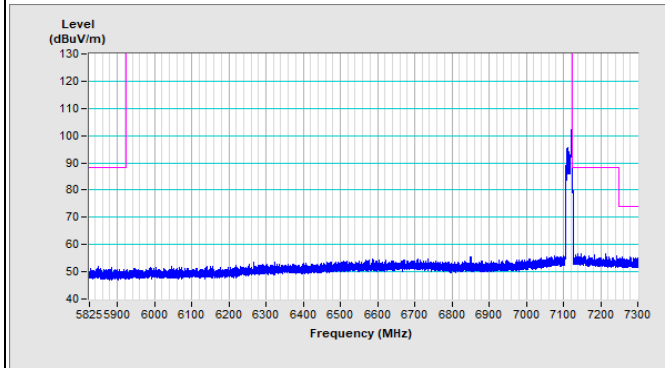

Horizontal (Peak)

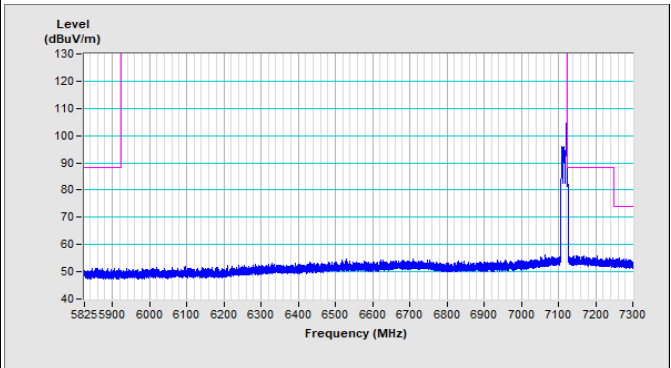


Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233




Horizontal (Average)

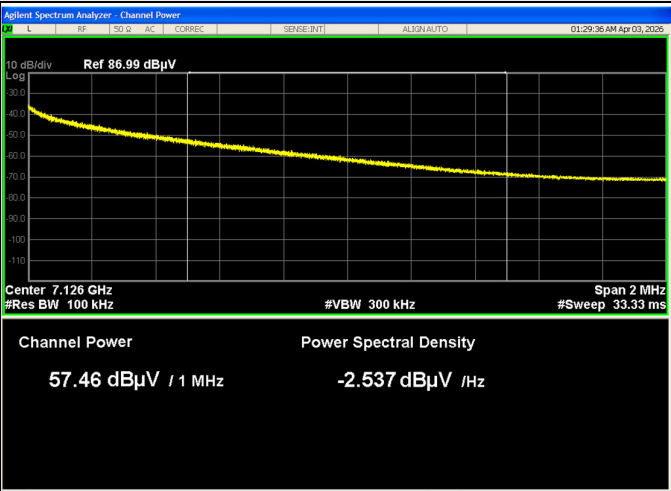


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

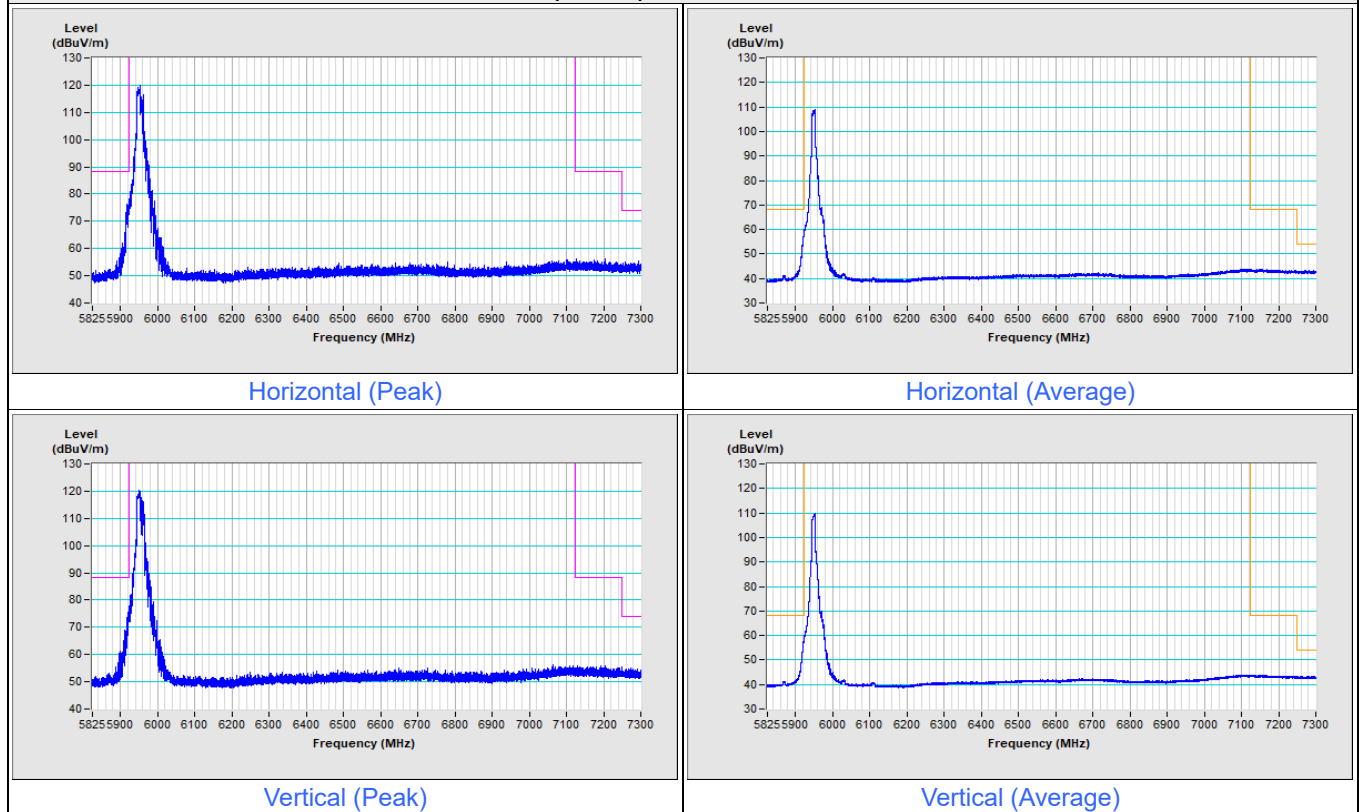

802.11be (EHT20) 106-tone RU Channel 233

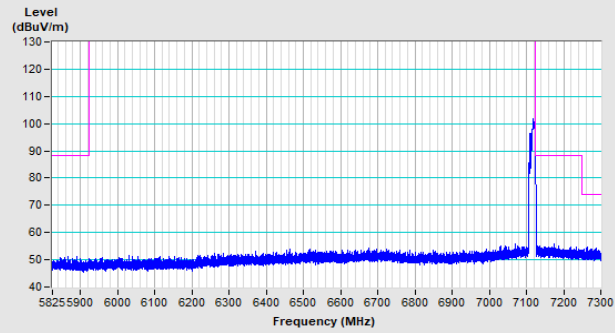


Horizontal (Peak)

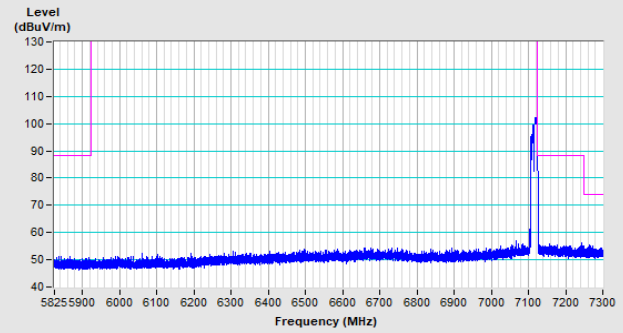

Vertical (Peak)


For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

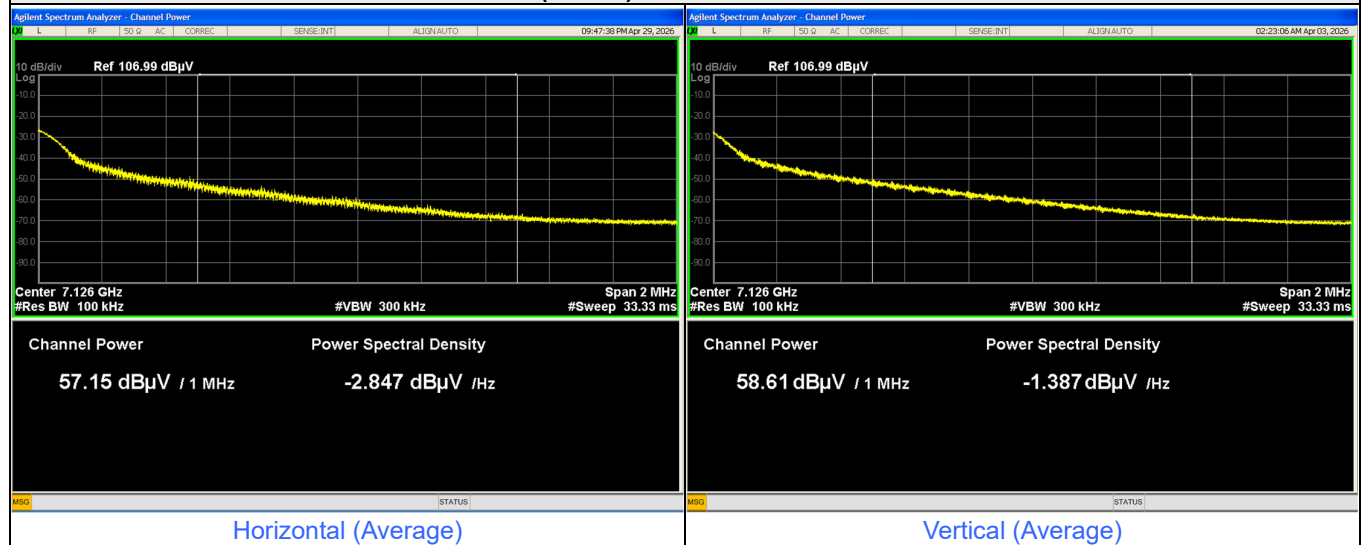


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

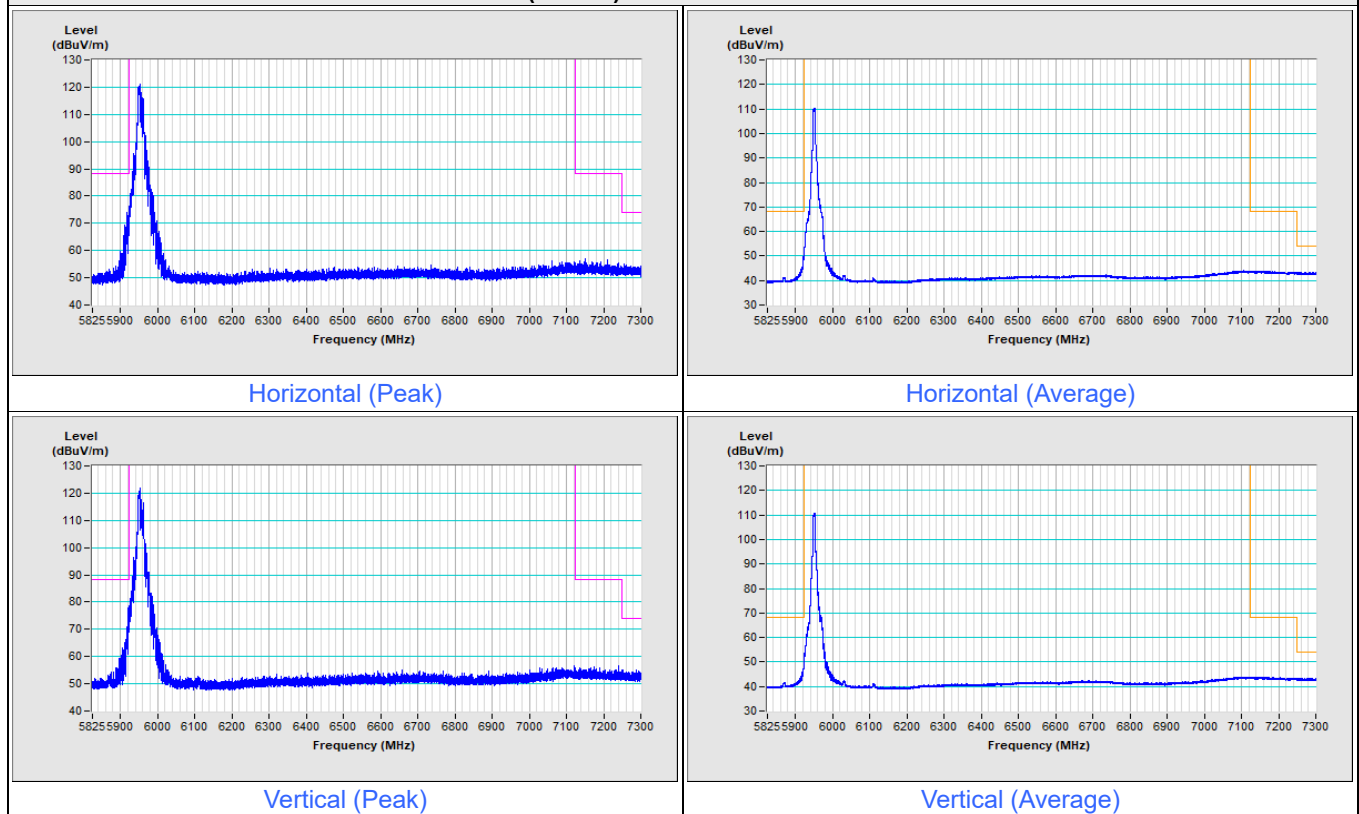


802.11be (EHT20) 52+26-tone MRU Channel 233

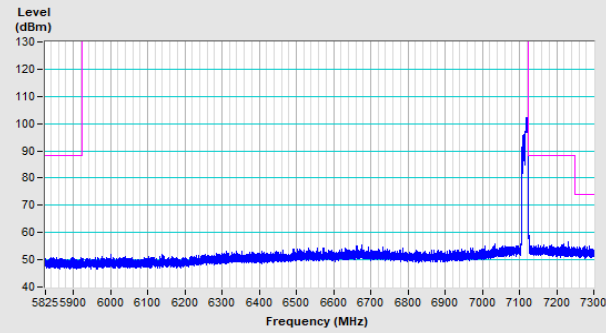


Horizontal (Peak)

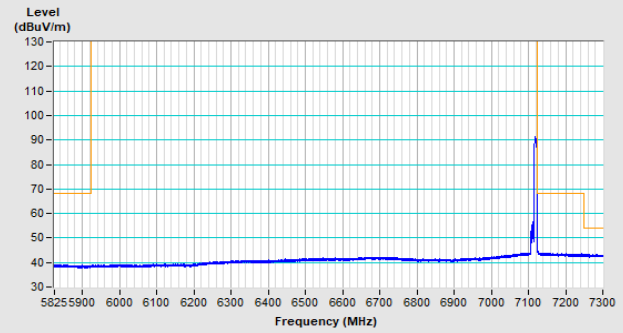

Horizontal (Average)

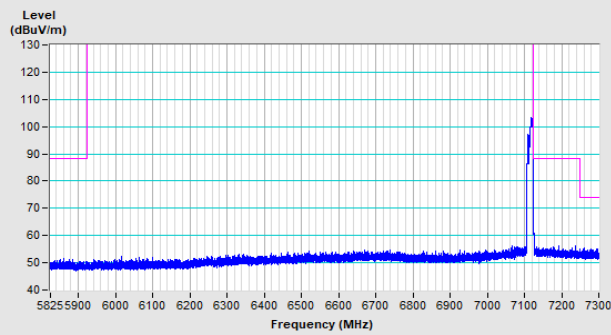


Vertical (Peak)

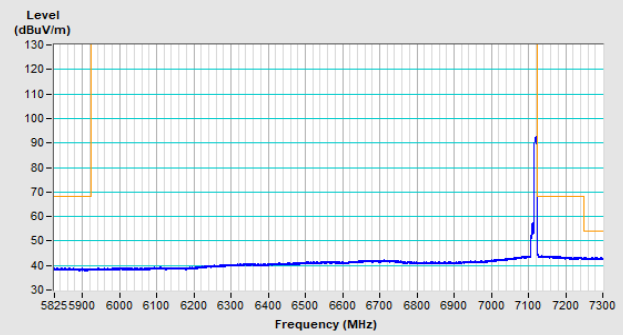

Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 1

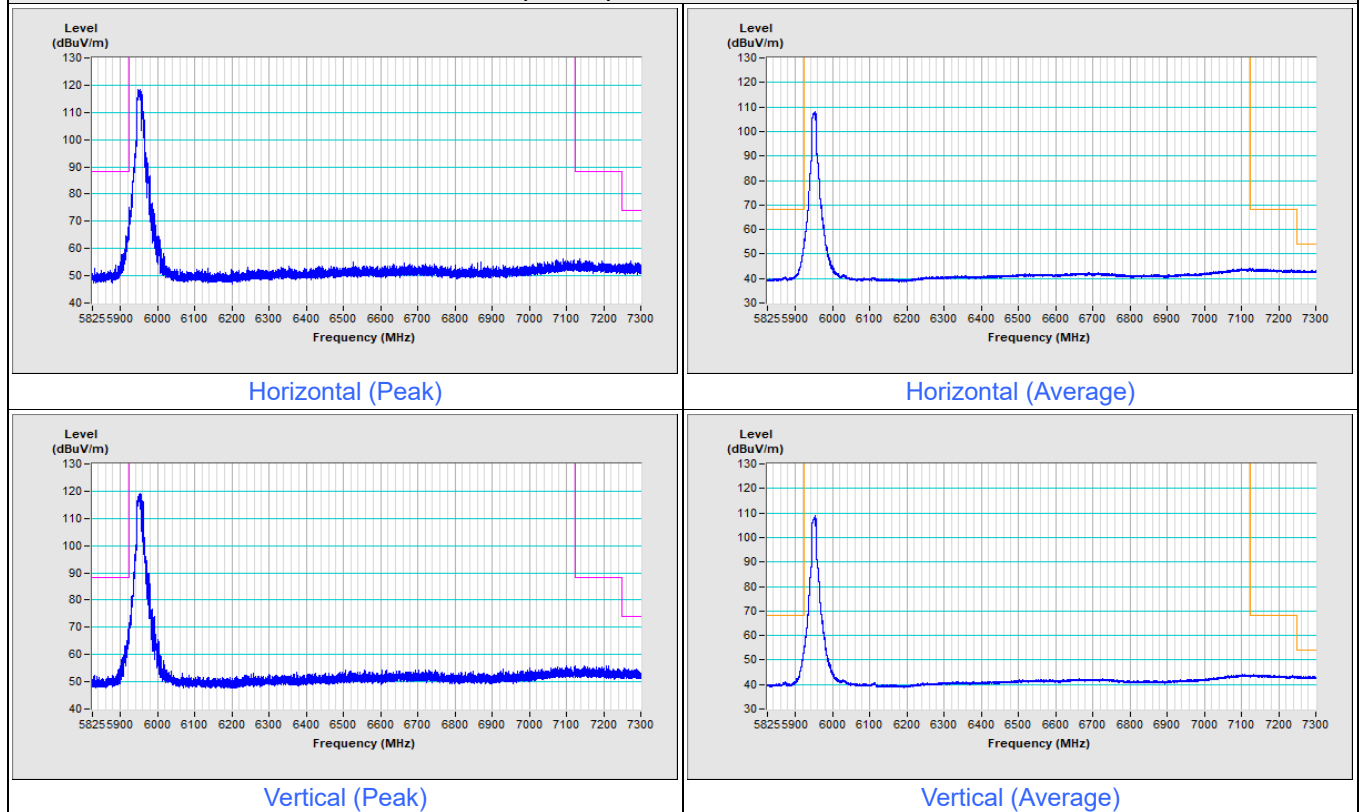


802.11be (EHT20) 106+26-tone MRU Channel 233

Level
(dBuV/m)

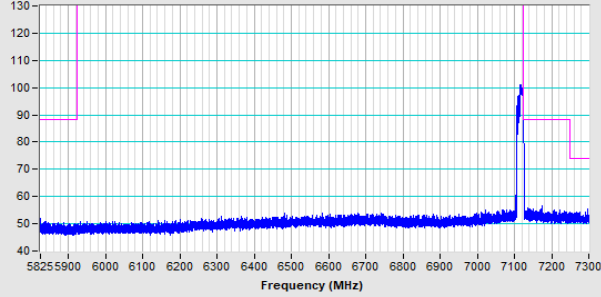

Horizontal (Peak)


Level
(dBuV/m)

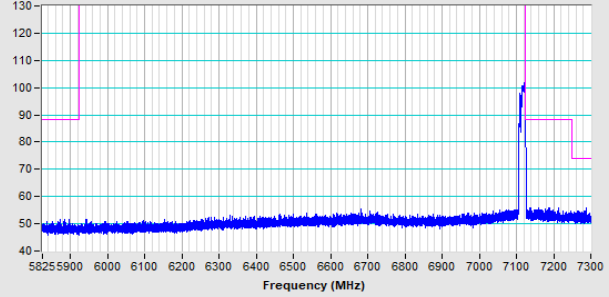


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233

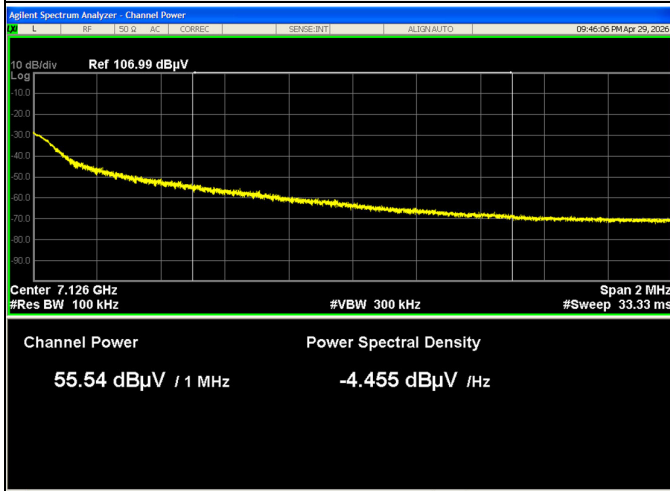


Horizontal (Average)

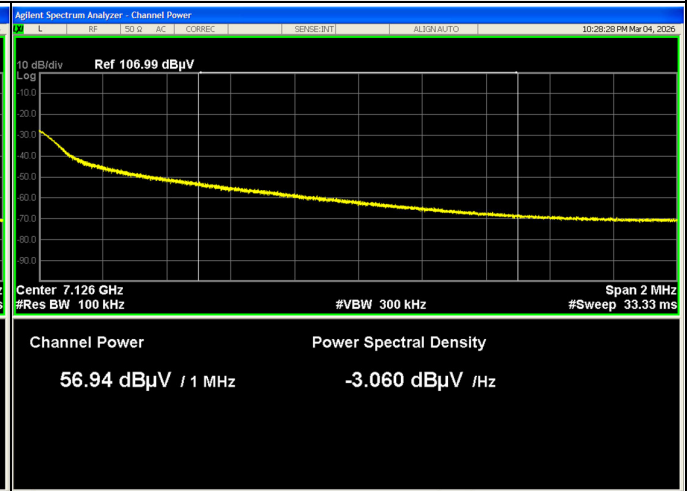


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

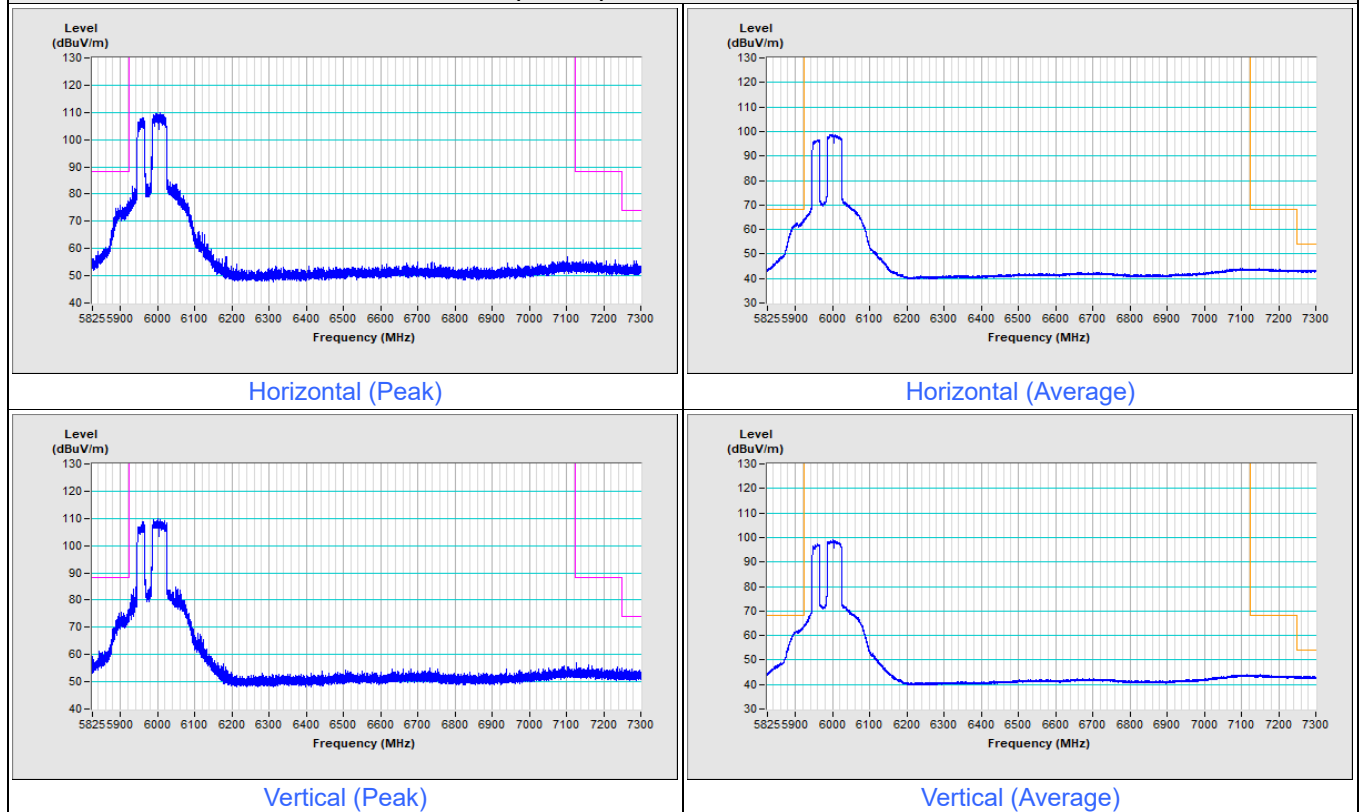


802.11be (EHT80) 484+242-tone MRU Channel 215

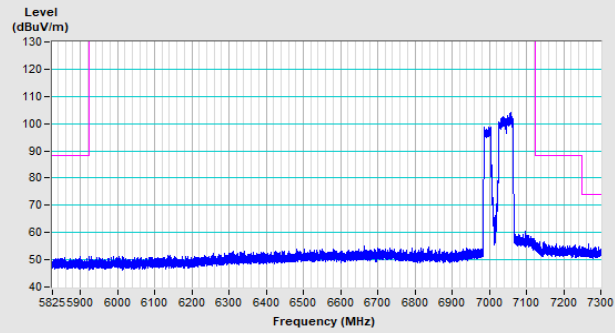


Horizontal (Peak)

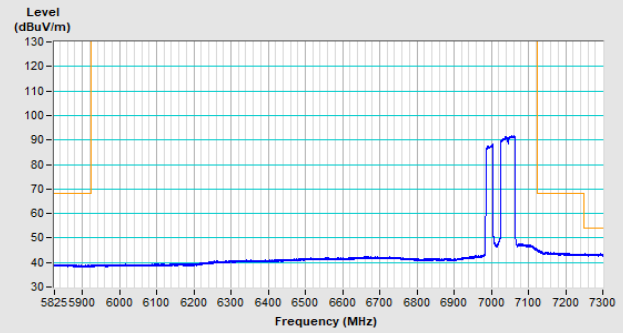

Horizontal (Average)

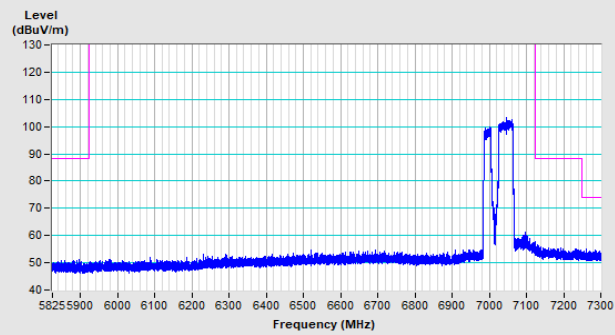


Vertical (Peak)

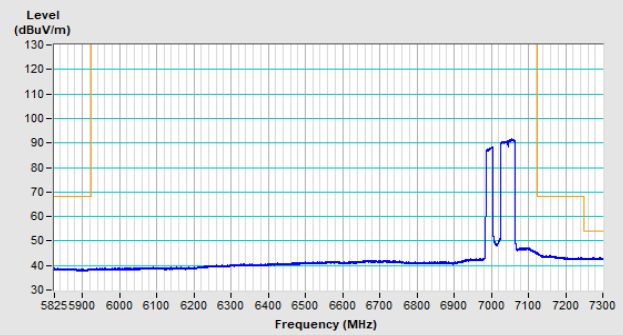


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

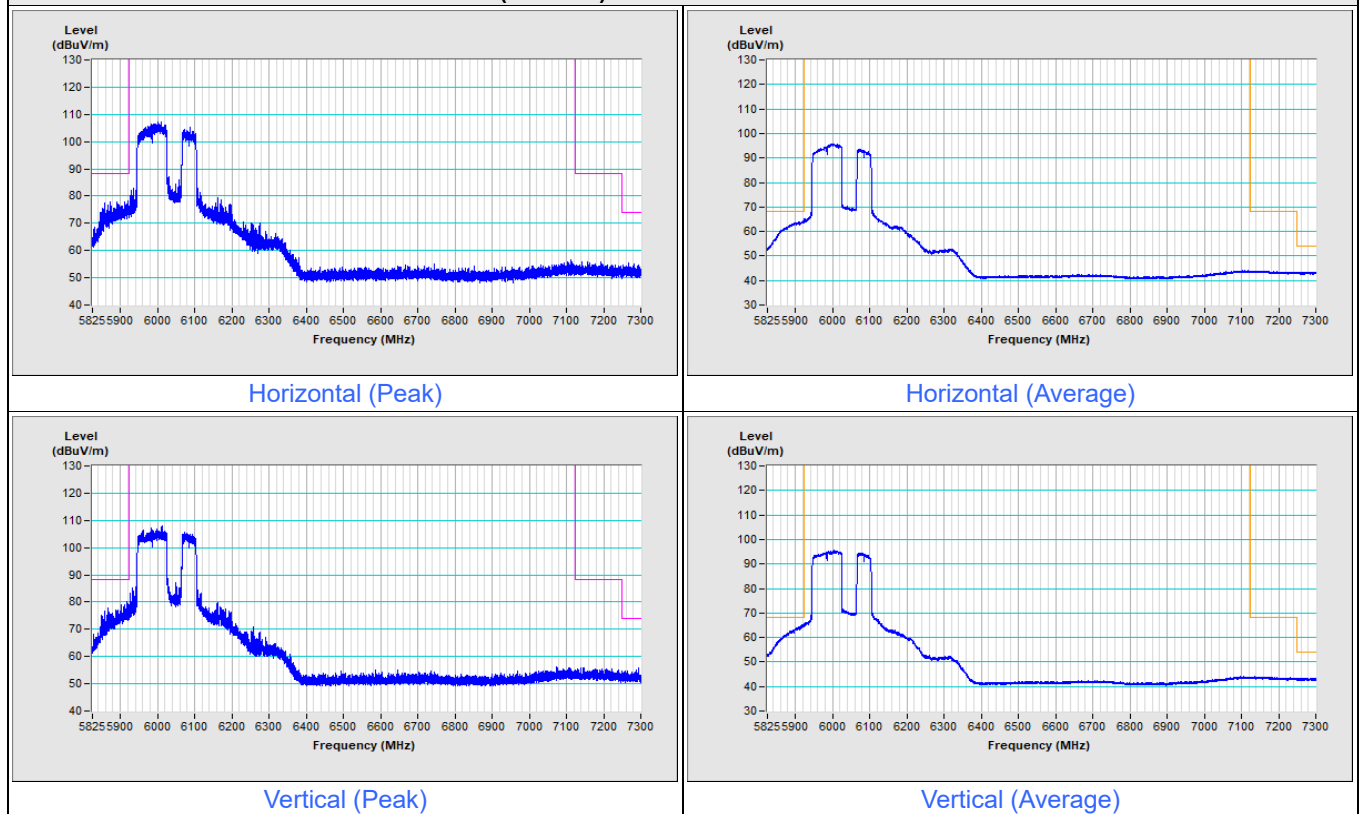


802.11be (EHT160) 996+484-tone MRU Channel 207

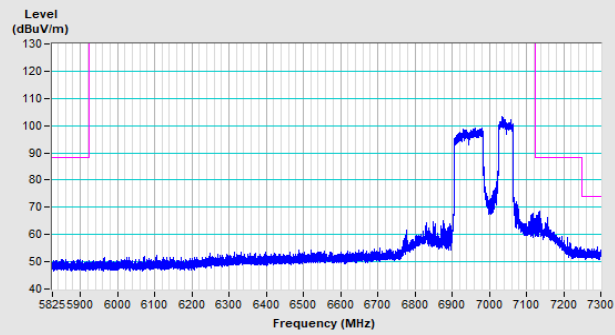


Horizontal (Peak)

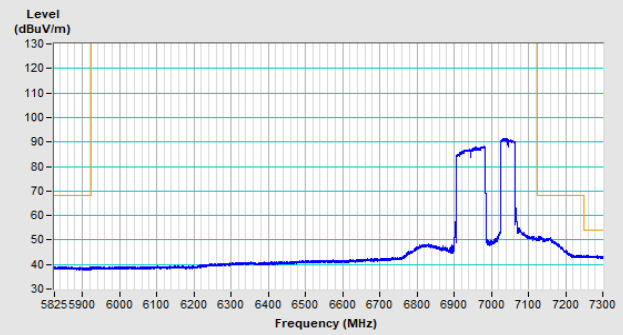

Horizontal (Average)

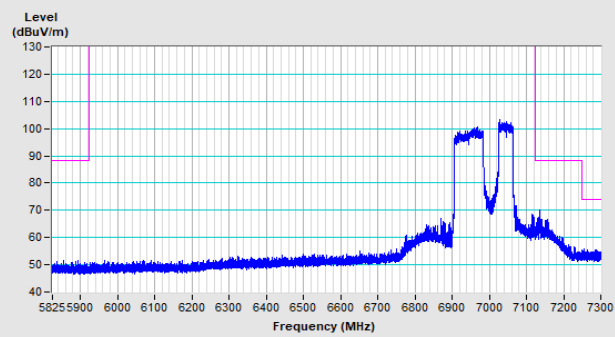


Vertical (Peak)

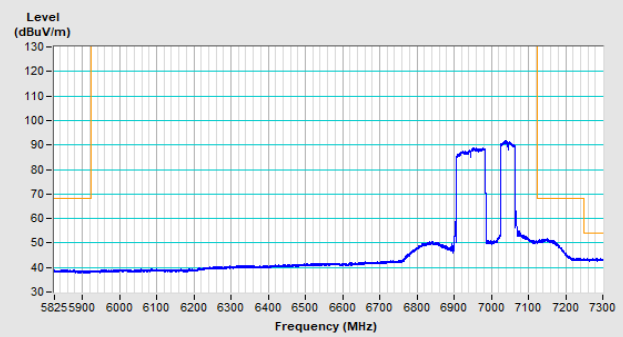


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

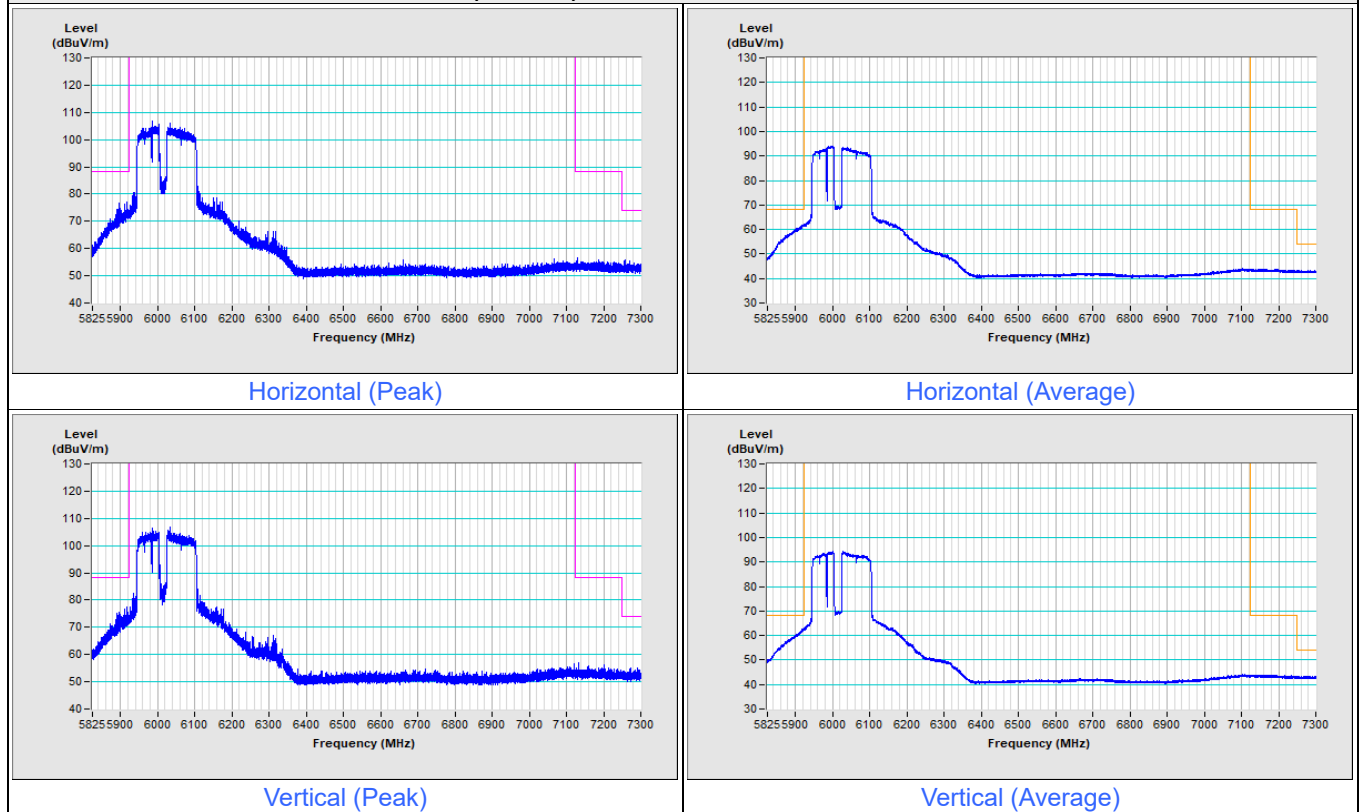


802.11be (EHT160) 996+484+242-tone MRU Channel 207

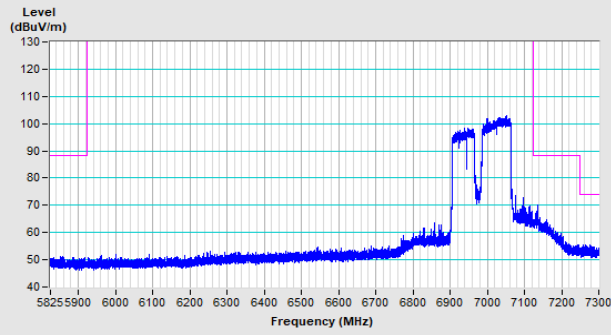


Horizontal (Peak)

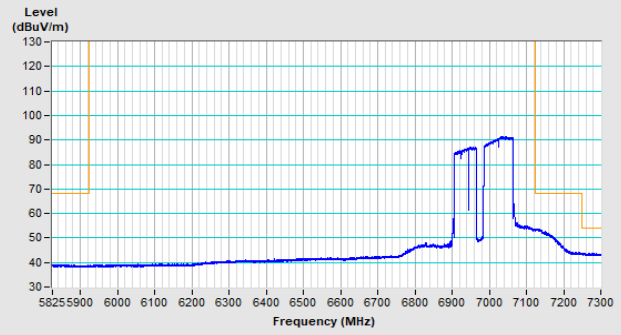

Horizontal (Average)

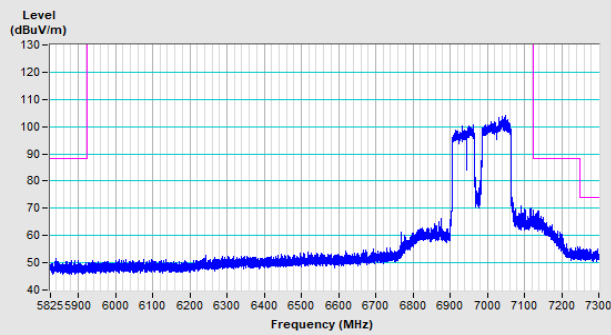

Vertical (Peak)

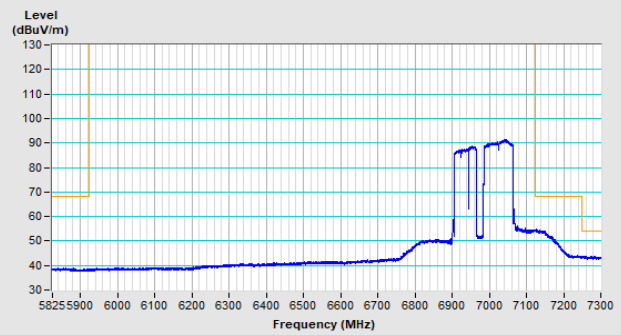

Vertical (Average)

Mode B

1Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.6 PK	88.2	-19.6	1.13 H	298	64.3	4.3
2	#5925.00	55.6 AV	68.2	-12.6	1.13 H	298	51.3	4.3
3	*5955.00	114.9 PK			1.13 H	298	110.4	4.5
4	*5955.00	105.4 AV			1.13 H	298	100.9	4.5
5	11910.00	50.5 PK	74.0	-23.5	3.81 H	103	38.3	12.2
6	11910.00	38.3 AV	54.0	-15.7	3.81 H	103	26.1	12.2
7	17865.00	55.5 PK	74.0	-18.5	3.54 H	333	33.6	21.9
8	17865.00	44.3 AV	54.0	-9.7	3.54 H	333	22.4	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.5 PK	88.2	-17.7	1.05 V	281	66.2	4.3
2	#5925.00	57.5 AV	68.2	-10.7	1.05 V	281	53.2	4.3
3	*5955.00	112.0 PK			1.05 V	281	107.5	4.5
4	*5955.00	102.6 AV			1.05 V	281	98.1	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.86 V	316	41.6	12.2
6	11910.00	41.6 AV	54.0	-12.4	3.86 V	316	29.4	12.2
7	17865.00	57.9 PK	74.0	-16.1	3.22 V	170	36.0	21.9
8	17865.00	46.8 AV	54.0	-7.2	3.22 V	170	24.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.2 PK			3.52 H	255	110.4	4.8
2	*6195.00	106.1 AV			3.52 H	255	101.3	4.8
3	12390.00	50.5 PK	74.0	-23.5	3.85 H	106	38.2	12.3
4	12390.00	38.2 AV	54.0	-15.8	3.85 H	106	25.9	12.3
5	18585.00	55.8 PK	74.0	-18.2	3.49 H	338	60.8	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.49 H	338	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.6 PK			1.14 V	95	106.8	4.8
2	*6195.00	103.7 AV			1.14 V	95	98.9	4.8
3	12390.00	53.5 PK	74.0	-20.5	3.85 V	311	41.2	12.3
4	12390.00	41.5 AV	54.0	-12.5	3.85 V	311	29.2	12.3
5	18585.00	57.5 PK	74.0	-16.5	3.16 V	158	62.5	-5.0
6	18585.00	46.7 AV	54.0	-7.3	3.16 V	158	51.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	115.1 PK			3.67 H	243	108.7	6.4
2	*6415.00	105.9 AV			3.67 H	243	99.5	6.4
3	#12830.00	50.1 PK	88.2	-38.1	3.84 H	112	37.1	13.0
4	#12830.00	37.9 AV	68.2	-30.3	3.84 H	112	24.9	13.0
5	19245.00	54.8 PK	74.0	-19.2	3.60 H	328	58.6	-3.8
6	19245.00	43.9 AV	54.0	-10.1	3.60 H	328	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.8 PK			1.13 V	104	106.4	6.4
2	*6415.00	103.7 AV			1.13 V	104	97.3	6.4
3	#12830.00	54.1 PK	88.2	-34.1	3.86 V	312	41.1	13.0
4	#12830.00	41.8 AV	68.2	-26.4	3.86 V	312	28.8	13.0
5	19245.00	58.3 PK	74.0	-15.7	3.28 V	168	62.1	-3.8
6	19245.00	47.0 AV	54.0	-7.0	3.28 V	168	50.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	99.4 PK			3.66 H	248	93.0	6.4
2	*6435.00	90.2 AV			3.66 H	248	83.8	6.4
3	#12870.00	50.6 PK	88.2	-37.6	3.80 H	113	37.6	13.0
4	#12870.00	38.3 AV	68.2	-29.9	3.80 H	113	25.3	13.0
5	19305.00	55.3 PK	74.0	-18.7	3.51 H	321	59.0	-3.7
6	19305.00	44.1 AV	54.0	-9.9	3.51 H	321	47.8	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.9 PK			1.15 V	283	92.5	6.4
2	*6435.00	89.4 AV			1.15 V	283	83.0	6.4
3	#12870.00	53.9 PK	88.2	-34.3	3.86 V	316	40.9	13.0
4	#12870.00	41.6 AV	68.2	-26.6	3.86 V	316	28.6	13.0
5	19305.00	57.2 PK	74.0	-16.8	3.19 V	155	60.9	-3.7
6	19305.00	46.3 AV	54.0	-7.7	3.19 V	155	50.0	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	115.1 PK			3.50 H	246	108.5	6.6
2	*6475.00	105.9 AV			3.50 H	246	99.3	6.6
3	#12950.00	51.1 PK	88.2	-37.1	3.85 H	103	38.0	13.1
4	#12950.00	38.7 AV	68.2	-29.5	3.85 H	103	25.6	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.55 H	341	59.2	-3.8
6	19425.00	44.4 AV	54.0	-9.6	3.55 H	341	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.7 PK			1.20 V	105	105.1	6.6
2	*6475.00	102.7 AV			1.20 V	105	96.1	6.6
3	#12950.00	53.3 PK	88.2	-34.9	3.82 V	308	40.2	13.1
4	#12950.00	41.3 AV	68.2	-26.9	3.82 V	308	28.2	13.1
5	19425.00	58.1 PK	74.0	-15.9	3.23 V	170	61.9	-3.8
6	19425.00	46.9 AV	54.0	-7.1	3.23 V	170	50.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.2 PK			3.42 H	246	93.3	6.9
2	*6515.00	90.9 AV			3.42 H	246	84.0	6.9
3	#13030.00	50.8 PK	88.2	-37.4	3.86 H	118	37.6	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.86 H	118	25.5	13.2
5	19545.00	55.0 PK	74.0	-19.0	3.48 H	306	59.1	-4.1
6	19545.00	43.9 AV	54.0	-10.1	3.48 H	306	48.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.1 PK			1.77 V	302	93.2	6.9
2	*6515.00	90.5 AV			1.77 V	302	83.6	6.9
3	#13030.00	53.8 PK	88.2	-34.4	3.87 V	325	40.6	13.2
4	#13030.00	41.8 AV	68.2	-26.4	3.87 V	325	28.6	13.2
5	19545.00	56.6 PK	74.0	-17.4	3.17 V	159	60.7	-4.1
6	19545.00	45.9 AV	54.0	-8.1	3.17 V	159	50.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	116.1 PK			1.06 H	210	109.2	6.9
2	*6535.00	107.1 AV			1.06 H	210	100.2	6.9
3	#13070.00	50.6 PK	88.2	-37.6	3.79 H	94	37.4	13.2
4	#13070.00	38.2 AV	68.2	-30.0	3.79 H	94	25.0	13.2
5	19605.00	55.1 PK	74.0	-18.9	3.59 H	326	59.1	-4.0
6	19605.00	44.0 AV	54.0	-10.0	3.59 H	326	48.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	113.9 PK			1.11 V	108	107.0	6.9
2	*6535.00	103.7 AV			1.11 V	108	96.8	6.9
3	#13070.00	53.7 PK	88.2	-34.5	3.84 V	305	40.5	13.2
4	#13070.00	41.5 AV	68.2	-26.7	3.84 V	305	28.3	13.2
5	19605.00	57.3 PK	74.0	-16.7	3.20 V	156	61.3	-4.0
6	19605.00	46.4 AV	54.0	-7.6	3.20 V	156	50.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	116.3 PK			1.17 H	214	109.1	7.2
2	*6695.00	106.2 AV			1.17 H	214	99.0	7.2
3	13390.00	51.1 PK	74.0	-22.9	3.76 H	98	37.1	14.0
4	13390.00	38.6 AV	54.0	-15.4	3.76 H	98	24.6	14.0
5	20085.00	55.7 PK	74.0	-18.3	3.53 H	331	59.2	-3.5
6	20085.00	44.3 AV	54.0	-9.7	3.53 H	331	47.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.6 PK			1.12 V	90	106.4	7.2
2	*6695.00	103.1 AV			1.12 V	90	95.9	7.2
3	13390.00	53.7 PK	74.0	-20.3	3.86 V	310	39.7	14.0
4	13390.00	41.4 AV	54.0	-12.6	3.86 V	310	27.4	14.0
5	20085.00	58.3 PK	74.0	-15.7	3.27 V	158	61.8	-3.5
6	20085.00	47.1 AV	54.0	-6.9	3.27 V	158	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	115.2 PK			1.30 H	56	108.0	7.2
2	*6855.00	104.8 AV			1.30 H	56	97.6	7.2
3	#13710.00	50.6 PK	88.2	-37.6	3.77 H	113	35.4	15.2
4	#13710.00	38.6 AV	68.2	-29.6	3.77 H	113	23.4	15.2
5	20565.00	55.7 PK	74.0	-18.3	3.55 H	347	59.0	-3.3
6	20565.00	44.3 AV	54.0	-9.7	3.55 H	347	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	112.0 PK			1.20 V	101	104.8	7.2
2	*6855.00	100.9 AV			1.20 V	101	93.7	7.2
3	#13710.00	54.2 PK	88.2	-34.0	3.84 V	300	39.0	15.2
4	#13710.00	42.0 AV	68.2	-26.2	3.84 V	300	26.8	15.2
5	20565.00	57.9 PK	74.0	-16.1	3.16 V	174	61.2	-3.3
6	20565.00	46.7 AV	54.0	-7.3	3.16 V	174	50.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.5 PK			1.16 H	196	92.3	7.2
2	*6875.00	90.2 AV			1.16 H	196	83.0	7.2
3	#13750.00	50.6 PK	88.2	-37.6	3.82 H	110	35.5	15.1
4	#13750.00	38.5 AV	68.2	-29.7	3.82 H	110	23.4	15.1
5	20625.00	55.7 PK	74.0	-18.3	3.53 H	322	59.0	-3.3
6	20625.00	44.6 AV	54.0	-9.4	3.53 H	322	47.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	99.1 PK			1.00 V	296	91.9	7.2
2	*6875.00	90.0 AV			1.00 V	296	82.8	7.2
3	#13750.00	54.4 PK	88.2	-33.8	3.83 V	309	39.3	15.1
4	#13750.00	41.9 AV	68.2	-26.3	3.83 V	309	26.8	15.1
5	20625.00	57.1 PK	74.0	-16.9	3.22 V	151	60.4	-3.3
6	20625.00	46.3 AV	54.0	-7.7	3.22 V	151	49.6	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.5 PK			1.11 H	198	91.5	8.0
2	*6995.00	90.3 AV			1.11 H	198	82.3	8.0
3	#13990.00	50.3 PK	88.2	-37.9	3.83 H	102	34.7	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.83 H	102	22.6	15.6
5	20985.00	55.3 PK	74.0	-18.7	3.53 H	311	58.1	-2.8
6	20985.00	43.9 AV	54.0	-10.1	3.53 H	311	46.7	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	98.9 PK			1.04 V	316	90.9	8.0
2	*6995.00	89.5 AV			1.04 V	316	81.5	8.0
3	#13990.00	53.8 PK	88.2	-34.4	3.83 V	315	38.2	15.6
4	#13990.00	41.3 AV	68.2	-26.9	3.83 V	315	25.7	15.6
5	20985.00	57.8 PK	74.0	-16.2	3.24 V	150	60.6	-2.8
6	20985.00	46.7 AV	54.0	-7.3	3.24 V	150	49.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			1.17 H	197	90.4	9.5
2	*7115.00	90.6 AV			1.17 H	197	81.1	9.5
3	#7125.00	78.6 PK	88.2	-9.6	1.17 H	197	69.2	9.4
4	#7125.00	65.2 AV	68.2	-3.0	1.17 H	197	55.8	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.17 H	197	46.4	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.17 H	197	34.9	8.7
7	#14230.00	50.8 PK	88.2	-37.4	3.74 H	120	35.5	15.3
8	#14230.00	38.7 AV	68.2	-29.5	3.74 H	120	23.4	15.3
9	21345.00	55.3 PK	74.0	-18.7	3.53 H	331	56.9	-1.6
10	21345.00	43.9 AV	54.0	-10.1	3.53 H	331	45.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.9 PK			1.02 V	301	90.4	9.5
2	*7115.00	90.5 AV			1.02 V	301	81.0	9.5
3	#7125.00	73.2 PK	88.2	-15.0	1.02 V	301	63.8	9.4
4	#7125.00	60.4 AV	68.2	-7.8	1.02 V	301	51.0	9.4
5	7250.00	54.7 PK	74.0	-19.3	1.02 V	301	46.0	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.02 V	301	34.8	8.7
7	#14230.00	53.2 PK	88.2	-35.0	3.83 V	322	37.9	15.3
8	#14230.00	41.2 AV	68.2	-27.0	3.83 V	322	25.9	15.3
9	21345.00	57.4 PK	74.0	-16.6	3.22 V	155	59.0	-1.6
10	21345.00	46.7 AV	54.0	-7.3	3.22 V	155	48.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1Tx NSS1

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.7 PK	88.2	-18.5	1.00 H	0	65.4	4.3
2	#5925.00	58.3 AV	68.2	-9.9	1.00 H	0	54.0	4.3
3	*5955.00	116.1 PK			1.13 H	299	111.6	4.5
4	*5955.00	104.9 AV			1.13 H	299	100.4	4.5
5	11910.00	51.1 PK	74.0	-22.9	3.81 H	100	38.9	12.2
6	11910.00	38.6 AV	54.0	-15.4	3.81 H	100	26.4	12.2
7	17865.00	55.1 PK	74.0	-18.9	3.54 H	326	33.2	21.9
8	17865.00	44.0 AV	54.0	-10.0	3.54 H	326	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	72.0 PK	88.2	-16.2	1.07 V	287	67.7	4.3
2	#5925.00	58.7 AV	68.2	-9.5	1.07 V	287	54.4	4.3
3	*5955.00	113.0 PK			1.07 V	287	108.5	4.5
4	*5955.00	101.7 AV			1.07 V	287	97.2	4.5
5	11910.00	53.7 PK	74.0	-20.3	3.84 V	323	41.5	12.2
6	11910.00	41.5 AV	54.0	-12.5	3.84 V	323	29.3	12.2
7	17865.00	57.8 PK	74.0	-16.2	3.22 V	169	35.9	21.9
8	17865.00	46.7 AV	54.0	-7.3	3.22 V	169	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.5 PK			3.33 H	246	111.7	4.8
2	*6195.00	105.1 AV			3.33 H	246	100.3	4.8
3	12390.00	50.2 PK	74.0	-23.8	3.76 H	90	37.9	12.3
4	12390.00	38.0 AV	54.0	-16.0	3.76 H	90	25.7	12.3
5	18585.00	55.8 PK	74.0	-18.2	3.51 H	317	60.8	-5.0
6	18585.00	44.7 AV	54.0	-9.3	3.51 H	317	49.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	114.7 PK			1.17 V	99	109.9	4.8
2	*6195.00	104.4 AV			1.17 V	99	99.6	4.8
3	12390.00	54.4 PK	74.0	-19.6	3.84 V	314	42.1	12.3
4	12390.00	42.0 AV	54.0	-12.0	3.84 V	314	29.7	12.3
5	18585.00	58.1 PK	74.0	-15.9	3.23 V	158	63.1	-5.0
6	18585.00	47.2 AV	54.0	-6.8	3.23 V	158	52.2	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			1.06 H	211	110.8	6.4
2	*6415.00	105.6 AV			1.06 H	211	99.2	6.4
3	#12830.00	50.4 PK	88.2	-37.8	3.77 H	109	37.4	13.0
4	#12830.00	38.5 AV	68.2	-29.7	3.77 H	109	25.5	13.0
5	19245.00	55.7 PK	74.0	-18.3	3.59 H	331	59.5	-3.8
6	19245.00	44.7 AV	54.0	-9.3	3.59 H	331	48.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	114.3 PK			1.21 V	109	107.9	6.4
2	*6415.00	103.0 AV			1.21 V	109	96.6	6.4
3	#12830.00	54.0 PK	88.2	-34.2	3.90 V	329	41.0	13.0
4	#12830.00	41.7 AV	68.2	-26.5	3.90 V	329	28.7	13.0
5	19245.00	57.9 PK	74.0	-16.1	3.24 V	159	61.7	-3.8
6	19245.00	46.7 AV	54.0	-7.3	3.24 V	159	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			3.64 H	247	95.1	6.4
2	*6435.00	89.9 AV			3.64 H	247	83.5	6.4
3	#12870.00	50.7 PK	88.2	-37.5	3.81 H	111	37.7	13.0
4	#12870.00	38.3 AV	68.2	-29.9	3.81 H	111	25.3	13.0
5	19305.00	55.6 PK	74.0	-18.4	3.57 H	320	59.3	-3.7
6	19305.00	44.4 AV	54.0	-9.6	3.57 H	320	48.1	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.2 PK			1.31 V	308	94.8	6.4
2	*6435.00	89.4 AV			1.31 V	308	83.0	6.4
3	#12870.00	54.4 PK	88.2	-33.8	3.91 V	309	41.4	13.0
4	#12870.00	42.0 AV	68.2	-26.2	3.91 V	309	29.0	13.0
5	19305.00	56.9 PK	74.0	-17.1	3.19 V	167	60.6	-3.7
6	19305.00	46.0 AV	54.0	-8.0	3.19 V	167	49.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	117.1 PK			1.11 H	210	110.5	6.6
2	*6475.00	105.8 AV			1.11 H	210	99.2	6.6
3	#12950.00	50.7 PK	88.2	-37.5	3.76 H	105	37.6	13.1
4	#12950.00	38.5 AV	68.2	-29.7	3.76 H	105	25.4	13.1
5	19425.00	55.6 PK	74.0	-18.4	3.56 H	336	59.4	-3.8
6	19425.00	44.2 AV	54.0	-9.8	3.56 H	336	48.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.5 PK			1.15 V	109	107.9	6.6
2	*6475.00	104.2 AV			1.15 V	109	97.6	6.6
3	#12950.00	54.0 PK	88.2	-34.2	3.81 V	325	40.9	13.1
4	#12950.00	41.7 AV	68.2	-26.5	3.81 V	325	28.6	13.1
5	19425.00	57.5 PK	74.0	-16.5	3.18 V	161	61.3	-3.8
6	19425.00	46.6 AV	54.0	-7.4	3.18 V	161	50.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.7 PK			3.41 H	249	95.8	6.9
2	*6515.00	90.4 AV			3.41 H	249	83.5	6.9
3	#13030.00	50.4 PK	88.2	-37.8	3.74 H	98	37.2	13.2
4	#13030.00	38.3 AV	68.2	-29.9	3.74 H	98	25.1	13.2
5	19545.00	54.9 PK	74.0	-19.1	3.50 H	328	59.0	-4.1
6	19545.00	44.0 AV	54.0	-10.0	3.50 H	328	48.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.7 PK			1.32 V	294	93.8	6.9
2	*6515.00	88.9 AV			1.32 V	294	82.0	6.9
3	#13030.00	53.5 PK	88.2	-34.7	3.83 V	309	40.3	13.2
4	#13030.00	41.2 AV	68.2	-27.0	3.83 V	309	28.0	13.2
5	19545.00	57.2 PK	74.0	-16.8	3.14 V	168	61.3	-4.1
6	19545.00	46.3 AV	54.0	-7.7	3.14 V	168	50.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.6 PK			1.07 H	210	110.7	6.9
2	*6535.00	106.1 AV			1.07 H	210	99.2	6.9
3	#13070.00	50.0 PK	88.2	-38.2	3.81 H	110	36.8	13.2
4	#13070.00	37.9 AV	68.2	-30.3	3.81 H	110	24.7	13.2
5	19605.00	56.0 PK	74.0	-18.0	3.54 H	330	60.0	-4.0
6	19605.00	44.7 AV	54.0	-9.3	3.54 H	330	48.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	114.7 PK			1.19 V	89	107.8	6.9
2	*6535.00	104.2 AV			1.19 V	89	97.3	6.9
3	#13070.00	53.6 PK	88.2	-34.6	3.84 V	329	40.4	13.2
4	#13070.00	41.1 AV	68.2	-27.1	3.84 V	329	27.9	13.2
5	19605.00	57.7 PK	74.0	-16.3	3.20 V	179	61.7	-4.0
6	19605.00	46.5 AV	54.0	-7.5	3.20 V	179	50.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.6 PK			1.17 H	215	108.4	7.2
2	*6695.00	104.7 AV			1.17 H	215	97.5	7.2
3	13390.00	50.4 PK	74.0	-23.6	3.85 H	117	36.4	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.85 H	117	24.0	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.55 H	321	58.8	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.55 H	321	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	115.1 PK			1.15 V	100	107.9	7.2
2	*6695.00	104.5 AV			1.15 V	100	97.3	7.2
3	13390.00	54.0 PK	74.0	-20.0	3.82 V	309	40.0	14.0
4	13390.00	41.8 AV	54.0	-12.2	3.82 V	309	27.8	14.0
5	20085.00	58.4 PK	74.0	-15.6	3.20 V	180	61.9	-3.5
6	20085.00	47.0 AV	54.0	-7.0	3.20 V	180	50.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.2 PK			1.06 H	201	110.0	7.2
2	*6855.00	106.7 AV			1.06 H	201	99.5	7.2
3	#13710.00	50.2 PK	88.2	-38.0	3.81 H	91	35.0	15.2
4	#13710.00	38.2 AV	68.2	-30.0	3.81 H	91	23.0	15.2
5	20565.00	55.8 PK	74.0	-18.2	3.57 H	321	59.1	-3.3
6	20565.00	44.3 AV	54.0	-9.7	3.57 H	321	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	114.9 PK			1.17 V	94	107.7	7.2
2	*6855.00	104.4 AV			1.17 V	94	97.2	7.2
3	#13710.00	54.0 PK	88.2	-34.2	3.82 V	318	38.8	15.2
4	#13710.00	41.7 AV	68.2	-26.5	3.82 V	318	26.5	15.2
5	20565.00	57.7 PK	74.0	-16.3	3.18 V	167	61.0	-3.3
6	20565.00	46.6 AV	54.0	-7.4	3.18 V	167	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.8 PK			1.15 H	196	95.6	7.2
2	*6875.00	90.5 AV			1.15 H	196	83.3	7.2
3	#13750.00	50.4 PK	88.2	-37.8	3.85 H	114	35.3	15.1
4	#13750.00	38.4 AV	68.2	-29.8	3.85 H	114	23.3	15.1
5	20625.00	55.4 PK	74.0	-18.6	3.53 H	332	58.7	-3.3
6	20625.00	44.1 AV	54.0	-9.9	3.53 H	332	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.4 PK			1.35 V	319	94.2	7.2
2	*6875.00	89.4 AV			1.35 V	319	82.2	7.2
3	#13750.00	54.3 PK	88.2	-33.9	3.86 V	311	39.2	15.1
4	#13750.00	41.7 AV	68.2	-26.5	3.86 V	311	26.6	15.1
5	20625.00	57.5 PK	74.0	-16.5	3.24 V	158	60.8	-3.3
6	20625.00	46.4 AV	54.0	-7.6	3.24 V	158	49.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.0 PK			1.20 H	16	94.0	8.0
2	*6995.00	90.6 AV			1.20 H	16	82.6	8.0
3	#13990.00	51.0 PK	88.2	-37.2	3.84 H	104	35.4	15.6
4	#13990.00	38.6 AV	68.2	-29.6	3.84 H	104	23.0	15.6
5	20985.00	55.9 PK	74.0	-18.1	3.52 H	331	58.7	-2.8
6	20985.00	44.5 AV	54.0	-9.5	3.52 H	331	47.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.5 PK			1.37 V	300	93.5	8.0
2	*6995.00	90.1 AV			1.37 V	300	82.1	8.0
3	#13990.00	54.2 PK	88.2	-34.0	3.91 V	314	38.6	15.6
4	#13990.00	42.0 AV	68.2	-26.2	3.91 V	314	26.4	15.6
5	20985.00	56.9 PK	74.0	-17.1	3.17 V	145	59.7	-2.8
6	20985.00	46.3 AV	54.0	-7.7	3.17 V	145	49.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			1.18 H	19	92.5	9.5
2	*7115.00	90.5 AV			1.18 H	19	81.0	9.5
3	#7125.00	85.6 PK	88.2	-2.6	1.18 H	19	76.2	9.4
4	#7125.00	63.7 AV	68.2	-4.5	1.18 H	19	54.3	9.4
5	7250.00	54.6 PK	74.0	-19.4	1.18 H	19	45.9	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.18 H	19	34.6	8.7
7	#14230.00	50.7 PK	88.2	-37.5	3.78 H	103	35.4	15.3
8	#14230.00	38.4 AV	68.2	-29.8	3.78 H	103	23.1	15.3
9	21345.00	55.8 PK	74.0	-18.2	3.56 H	324	57.4	-1.6
10	21345.00	44.4 AV	54.0	-9.6	3.56 H	324	46.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			1.36 V	308	91.5	9.5
2	*7115.00	89.3 AV			1.36 V	308	79.8	9.5
3	#7125.00	84.1 PK	88.2	-4.1	1.36 V	308	74.7	9.4
4	#7125.00	58.8 AV	68.2	-9.4	1.36 V	308	49.4	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.36 V	308	46.9	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.36 V	308	34.8	8.7
7	#14230.00	53.9 PK	88.2	-34.3	3.87 V	318	38.6	15.3
8	#14230.00	41.6 AV	68.2	-26.6	3.87 V	318	26.3	15.3
9	21345.00	56.9 PK	74.0	-17.1	3.20 V	157	58.5	-1.6
10	21345.00	45.9 AV	54.0	-8.1	3.20 V	157	47.5	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.4 PK	88.2	-10.8	3.82 H	100	73.1	4.3
2	#5925.00	65.4 AV	68.2	-2.8	3.82 H	100	61.1	4.3
3	*5965.00	112.6 PK			3.82 H	100	108.2	4.4
4	*5965.00	101.7 AV			3.82 H	100	97.3	4.4
5	11930.00	50.7 PK	74.0	-23.3	3.85 H	105	38.6	12.1
6	11930.00	39.6 AV	54.0	-14.4	3.85 H	105	27.5	12.1
7	17895.00	55.2 PK	74.0	-18.8	3.59 H	324	32.9	22.3
8	17895.00	45.0 AV	54.0	-9.0	3.59 H	324	22.7	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	3.84 V	349	69.3	4.3
2	#5925.00	59.9 AV	68.2	-8.3	3.84 V	349	55.6	4.3
3	*5965.00	110.0 PK			3.84 V	349	105.6	4.4
4	*5965.00	98.6 AV			3.84 V	349	94.2	4.4
5	11930.00	53.9 PK	74.0	-20.1	3.82 V	318	41.8	12.1
6	11930.00	41.9 AV	54.0	-12.1	3.82 V	318	29.8	12.1
7	17895.00	57.9 PK	74.0	-16.1	3.22 V	181	35.6	22.3
8	17895.00	46.9 AV	54.0	-7.1	3.22 V	181	24.6	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	112.9 PK			1.02 H	81	108.0	4.9
2	*6205.00	100.8 AV			1.02 H	81	95.9	4.9
3	12410.00	51.0 PK	74.0	-23.0	3.60 H	73	38.7	12.3
4	12410.00	39.1 AV	54.0	-14.9	3.60 H	73	26.8	12.3
5	18615.00	56.4 PK	74.0	-17.6	3.63 H	320	61.3	-4.9
6	18615.00	44.9 AV	54.0	-9.1	3.63 H	320	49.8	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	109.8 PK			1.09 V	87	104.9	4.9
2	*6205.00	98.0 AV			1.09 V	87	93.1	4.9
3	12410.00	53.8 PK	74.0	-20.2	3.86 V	301	41.5	12.3
4	12410.00	41.8 AV	54.0	-12.2	3.86 V	301	29.5	12.3
5	18615.00	57.9 PK	74.0	-16.1	3.20 V	154	62.8	-4.9
6	18615.00	46.9 AV	54.0	-7.1	3.20 V	154	51.8	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	114.1 PK			1.08 H	65	107.7	6.4
2	*6405.00	101.9 AV			1.08 H	65	95.5	6.4
3	#12810.00	50.7 PK	88.2	-37.5	3.87 H	110	37.9	12.8
4	#12810.00	38.3 AV	68.2	-29.9	3.87 H	110	25.5	12.8
5	19215.00	55.5 PK	74.0	-18.5	3.59 H	348	59.2	-3.7
6	19215.00	44.2 AV	54.0	-9.8	3.59 H	348	47.9	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.4 PK			1.15 V	116	104.0	6.4
2	*6405.00	98.5 AV			1.15 V	116	92.1	6.4
3	#12810.00	54.5 PK	88.2	-33.7	3.88 V	303	41.7	12.8
4	#12810.00	42.0 AV	68.2	-26.2	3.88 V	303	29.2	12.8
5	19215.00	57.5 PK	74.0	-16.5	3.20 V	174	61.2	-3.7
6	19215.00	46.6 AV	54.0	-7.4	3.20 V	174	50.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	101.9 PK			1.16 H	188	95.5	6.4
2	*6445.00	90.5 AV			1.16 H	188	84.1	6.4
3	#12890.00	50.7 PK	88.2	-37.5	3.78 H	120	37.7	13.0
4	#12890.00	38.1 AV	68.2	-30.1	3.78 H	120	25.1	13.0
5	19335.00	55.9 PK	74.0	-18.1	3.54 H	324	59.6	-3.7
6	19335.00	44.6 AV	54.0	-9.4	3.54 H	324	48.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.2 PK			1.07 V	309	95.8	6.4
2	*6445.00	90.7 AV			1.07 V	309	84.3	6.4
3	#12890.00	53.9 PK	88.2	-34.3	3.81 V	306	40.9	13.0
4	#12890.00	41.7 AV	68.2	-26.5	3.81 V	306	28.7	13.0
5	19335.00	56.8 PK	74.0	-17.2	3.15 V	143	60.5	-3.7
6	19335.00	46.1 AV	54.0	-7.9	3.15 V	143	49.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	114.9 PK			1.07 H	66	108.2	6.7
2	*6485.00	101.9 AV			1.07 H	66	95.2	6.7
3	#12970.00	50.2 PK	88.2	-38.0	3.76 H	112	37.1	13.1
4	#12970.00	38.3 AV	68.2	-29.9	3.76 H	112	25.2	13.1
5	19455.00	55.3 PK	74.0	-18.7	3.49 H	321	59.2	-3.9
6	19455.00	44.0 AV	54.0	-10.0	3.49 H	321	47.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.8 PK			1.10 V	115	104.1	6.7
2	*6485.00	98.7 AV			1.10 V	115	92.0	6.7
3	#12970.00	53.9 PK	88.2	-34.3	3.91 V	300	40.8	13.1
4	#12970.00	41.7 AV	68.2	-26.5	3.91 V	300	28.6	13.1
5	19455.00	58.4 PK	74.0	-15.6	3.18 V	157	62.3	-3.9
6	19455.00	47.3 AV	54.0	-6.7	3.18 V	157	51.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	101.9 PK			1.15 H	202	95.0	6.9
2	*6525.00	90.7 AV			1.15 H	202	83.8	6.9
3	#13050.00	50.2 PK	88.2	-38.0	3.77 H	115	37.0	13.2
4	#13050.00	38.1 AV	68.2	-30.1	3.77 H	115	24.9	13.2
5	19575.00	55.4 PK	74.0	-18.6	3.54 H	327	59.5	-4.1
6	19575.00	44.4 AV	54.0	-9.6	3.54 H	327	48.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.6 PK			1.04 V	292	95.7	6.9
2	*6525.00	91.5 AV			1.04 V	292	84.6	6.9
3	#13050.00	53.1 PK	88.2	-35.1	3.89 V	300	39.9	13.2
4	#13050.00	41.1 AV	68.2	-27.1	3.89 V	300	27.9	13.2
5	19575.00	56.7 PK	74.0	-17.3	3.20 V	148	60.8	-4.1
6	19575.00	45.9 AV	54.0	-8.1	3.20 V	148	50.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	114.6 PK			1.06 H	64	107.7	6.9
2	*6565.00	102.6 AV			1.06 H	64	95.7	6.9
3	#13130.00	51.0 PK	88.2	-37.2	3.81 H	110	37.8	13.2
4	#13130.00	38.7 AV	68.2	-29.5	3.81 H	110	25.5	13.2
5	19695.00	55.4 PK	74.0	-18.6	3.53 H	325	59.3	-3.9
6	19695.00	44.3 AV	54.0	-9.7	3.53 H	325	48.2	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.7 PK			1.17 V	90	103.8	6.9
2	*6565.00	98.8 AV			1.17 V	90	91.9	6.9
3	#13130.00	53.7 PK	88.2	-34.5	3.88 V	303	40.5	13.2
4	#13130.00	41.4 AV	68.2	-26.8	3.88 V	303	28.2	13.2
5	19695.00	57.4 PK	74.0	-16.6	3.26 V	176	61.3	-3.9
6	19695.00	46.5 AV	54.0	-7.5	3.26 V	176	50.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	112.9 PK			1.06 H	60	105.7	7.2
2	*6685.00	101.7 AV			1.06 H	60	94.5	7.2
3	13370.00	50.5 PK	74.0	-23.5	3.82 H	94	36.5	14.0
4	13370.00	38.0 AV	54.0	-16.0	3.82 H	94	24.0	14.0
5	20055.00	55.0 PK	74.0	-19.0	3.53 H	348	58.5	-3.5
6	20055.00	43.8 AV	54.0	-10.2	3.53 H	348	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	110.3 PK			1.14 V	114	103.1	7.2
2	*6685.00	98.2 AV			1.14 V	114	91.0	7.2
3	13370.00	54.3 PK	74.0	-19.7	3.82 V	326	40.3	14.0
4	13370.00	42.1 AV	54.0	-11.9	3.82 V	326	28.1	14.0
5	20055.00	58.3 PK	74.0	-15.7	3.23 V	156	61.8	-3.5
6	20055.00	47.1 AV	54.0	-6.9	3.23 V	156	50.6	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.3 PK			1.14 H	57	106.2	7.1
2	*6845.00	101.6 AV			1.14 H	57	94.5	7.1
3	#13690.00	50.0 PK	88.2	-38.2	3.86 H	112	34.9	15.1
4	#13690.00	37.8 AV	68.2	-30.4	3.86 H	112	22.7	15.1
5	20535.00	55.9 PK	74.0	-18.1	3.58 H	332	59.1	-3.2
6	20535.00	44.5 AV	54.0	-9.5	3.58 H	332	47.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.3 PK			1.14 V	101	103.2	7.1
2	*6845.00	98.4 AV			1.14 V	101	91.3	7.1
3	#13690.00	54.0 PK	88.2	-34.2	3.81 V	308	38.9	15.1
4	#13690.00	42.0 AV	68.2	-26.2	3.81 V	308	26.9	15.1
5	20535.00	58.2 PK	74.0	-15.8	3.23 V	174	61.4	-3.2
6	20535.00	46.8 AV	54.0	-7.2	3.23 V	174	50.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.6 PK			1.14 H	184	95.4	7.2
2	*6885.00	91.1 AV			1.14 H	184	83.9	7.2
3	#13770.00	50.7 PK	88.2	-37.5	3.84 H	109	35.7	15.0
4	#13770.00	38.6 AV	68.2	-29.6	3.84 H	109	23.6	15.0
5	20655.00	55.2 PK	74.0	-18.8	3.50 H	329	58.5	-3.3
6	20655.00	43.8 AV	54.0	-10.2	3.50 H	329	47.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.1 PK			1.04 V	299	94.9	7.2
2	*6885.00	90.8 AV			1.04 V	299	83.6	7.2
3	#13770.00	54.1 PK	88.2	-34.1	3.84 V	314	39.1	15.0
4	#13770.00	41.7 AV	68.2	-26.5	3.84 V	314	26.7	15.0
5	20655.00	57.5 PK	74.0	-16.5	3.20 V	162	60.8	-3.3
6	20655.00	46.5 AV	54.0	-7.5	3.20 V	162	49.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.3 PK			1.12 H	195	94.6	7.7
2	*6965.00	91.0 AV			1.12 H	195	83.3	7.7
3	#13930.00	50.6 PK	88.2	-37.6	3.84 H	124	35.3	15.3
4	#13930.00	38.5 AV	68.2	-29.7	3.84 H	124	23.2	15.3
5	20895.00	55.1 PK	74.0	-18.9	3.49 H	328	57.8	-2.7
6	20895.00	43.7 AV	54.0	-10.3	3.49 H	328	46.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.5 PK			1.14 V	302	94.8	7.7
2	*6965.00	91.1 AV			1.14 V	302	83.4	7.7
3	#13930.00	53.6 PK	88.2	-34.6	3.85 V	308	38.3	15.3
4	#13930.00	41.4 AV	68.2	-26.8	3.85 V	308	26.1	15.3
5	20895.00	57.7 PK	74.0	-16.3	3.20 V	153	60.4	-2.7
6	20895.00	46.6 AV	54.0	-7.4	3.20 V	153	49.3	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	102.6 PK			1.00 H	196	93.4	9.2
2	*7085.00	90.5 AV			1.00 H	196	81.3	9.2
3	#7125.00	56.6 PK	88.2	-31.6	1.00 H	196	47.2	9.4
4	#7125.00	44.9 AV	68.2	-23.3	1.00 H	196	35.5	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.00 H	196	46.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.00 H	196	34.7	8.7
7	#14170.00	50.5 PK	88.2	-37.7	3.76 H	128	35.3	15.2
8	#14170.00	38.3 AV	68.2	-29.9	3.76 H	128	23.1	15.2
9	21255.00	55.1 PK	74.0	-18.9	3.47 H	326	56.5	-1.4
10	21255.00	43.7 AV	54.0	-10.3	3.47 H	326	45.1	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	102.3 PK			1.10 V	306	93.1	9.2
2	*7085.00	91.1 AV			1.10 V	306	81.9	9.2
3	#7125.00	56.5 PK	88.2	-31.7	1.10 V	306	47.1	9.4
4	#7125.00	45.2 AV	68.2	-23.0	1.10 V	306	35.8	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.10 V	306	46.8	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.10 V	306	34.7	8.7
7	#14170.00	54.0 PK	88.2	-34.2	3.83 V	329	38.8	15.2
8	#14170.00	42.0 AV	68.2	-26.2	3.83 V	329	26.8	15.2
9	21255.00	57.1 PK	74.0	-16.9	3.14 V	165	58.5	-1.4
10	21255.00	46.2 AV	54.0	-7.8	3.14 V	165	47.6	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.3 PK	88.2	-11.9	1.00 H	0	72.0	4.3
2	#5925.00	65.0 AV	68.2	-3.2	1.00 H	0	60.7	4.3
3	*5985.00	107.9 PK			1.11 H	296	103.5	4.4
4	*5985.00	96.6 AV			1.11 H	296	92.2	4.4
5	11970.00	50.8 PK	74.0	-23.2	3.78 H	88	38.6	12.2
6	11970.00	38.6 AV	54.0	-15.4	3.78 H	88	26.4	12.2
7	17955.00	55.4 PK	74.0	-18.6	3.56 H	326	32.0	23.4
8	17955.00	44.3 AV	54.0	-9.7	3.56 H	326	20.9	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	3.47 V	341	72.2	4.3
2	#5925.00	64.0 AV	68.2	-4.2	3.47 V	341	59.7	4.3
3	*5985.00	105.9 PK			3.47 V	341	101.5	4.4
4	*5985.00	94.9 AV			3.47 V	341	90.5	4.4
5	11970.00	54.1 PK	74.0	-19.9	3.90 V	307	41.9	12.2
6	11970.00	41.9 AV	54.0	-12.1	3.90 V	307	29.7	12.2
7	17955.00	58.0 PK	74.0	-16.0	3.18 V	170	34.6	23.4
8	17955.00	46.9 AV	54.0	-7.1	3.18 V	170	23.5	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.8 PK			3.31 H	250	105.8	5.0
2	*6225.00	99.8 AV			3.31 H	250	94.8	5.0
3	12450.00	50.6 PK	74.0	-23.4	3.82 H	108	38.3	12.3
4	12450.00	38.2 AV	54.0	-15.8	3.82 H	108	25.9	12.3
5	18675.00	55.8 PK	74.0	-18.2	3.56 H	333	60.7	-4.9
6	18675.00	44.7 AV	54.0	-9.3	3.56 H	333	49.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	109.8 PK			1.14 V	106	104.8	5.0
2	*6225.00	96.7 AV			1.14 V	106	91.7	5.0
3	12450.00	54.2 PK	74.0	-19.8	3.81 V	331	41.9	12.3
4	12450.00	42.0 AV	54.0	-12.0	3.81 V	331	29.7	12.3
5	18675.00	57.8 PK	74.0	-16.2	3.17 V	164	62.7	-4.9
6	18675.00	46.4 AV	54.0	-7.6	3.17 V	164	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	111.1 PK			3.72 H	244	104.9	6.2
2	*6385.00	99.9 AV			3.72 H	244	93.7	6.2
3	#12770.00	50.8 PK	88.2	-37.4	3.75 H	107	38.0	12.8
4	#12770.00	38.3 AV	68.2	-29.9	3.75 H	107	25.5	12.8
5	19155.00	55.7 PK	74.0	-18.3	3.52 H	325	59.5	-3.8
6	19155.00	44.5 AV	54.0	-9.5	3.52 H	325	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.0 PK			1.17 V	117	102.8	6.2
2	*6385.00	96.1 AV			1.17 V	117	89.9	6.2
3	#12770.00	53.5 PK	88.2	-34.7	3.81 V	329	40.7	12.8
4	#12770.00	41.3 AV	68.2	-26.9	3.81 V	329	28.5	12.8
5	19155.00	58.3 PK	74.0	-15.7	3.17 V	184	62.1	-3.8
6	19155.00	47.3 AV	54.0	-6.7	3.17 V	184	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.6 PK			1.23 H	204	104.1	6.5
2	*6465.00	98.8 AV			1.23 H	204	92.3	6.5
3	#12930.00	50.4 PK	88.2	-37.8	3.77 H	87	37.3	13.1
4	#12930.00	38.4 AV	68.2	-29.8	3.77 H	87	25.3	13.1
5	19395.00	55.7 PK	74.0	-18.3	3.51 H	333	59.4	-3.7
6	19395.00	44.8 AV	54.0	-9.2	3.51 H	333	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.2 PK			1.10 V	106	102.7	6.5
2	*6465.00	96.6 AV			1.10 V	106	90.1	6.5
3	#12930.00	54.3 PK	88.2	-33.9	3.86 V	332	41.2	13.1
4	#12930.00	41.8 AV	68.2	-26.4	3.86 V	332	28.7	13.1
5	19395.00	57.2 PK	74.0	-16.8	3.25 V	162	60.9	-3.7
6	19395.00	46.4 AV	54.0	-7.6	3.25 V	162	50.1	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	102.4 PK			1.08 H	207	95.5	6.9
2	*6545.00	90.7 AV			1.08 H	207	83.8	6.9
3	#13090.00	50.3 PK	88.2	-37.9	3.76 H	101	37.1	13.2
4	#13090.00	38.0 AV	68.2	-30.2	3.76 H	101	24.8	13.2
5	19635.00	55.2 PK	74.0	-18.8	3.54 H	332	59.2	-4.0
6	19635.00	44.0 AV	54.0	-10.0	3.54 H	332	48.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	101.0 PK			1.13 V	301	94.1	6.9
2	*6545.00	90.4 AV			1.13 V	301	83.5	6.9
3	#13090.00	54.6 PK	88.2	-33.6	3.86 V	329	41.4	13.2
4	#13090.00	42.1 AV	68.2	-26.1	3.86 V	329	28.9	13.2
5	19635.00	57.5 PK	74.0	-16.5	3.23 V	145	61.5	-4.0
6	19635.00	46.7 AV	54.0	-7.3	3.23 V	145	50.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	111.5 PK			3.34 H	247	104.6	6.9
2	*6625.00	99.9 AV			3.34 H	247	93.0	6.9
3	13250.00	50.2 PK	74.0	-23.8	3.77 H	100	36.6	13.6
4	13250.00	37.8 AV	54.0	-16.2	3.77 H	100	24.2	13.6
5	19875.00	55.4 PK	74.0	-18.6	3.53 H	342	58.9	-3.5
6	19875.00	44.2 AV	54.0	-9.8	3.53 H	342	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.8 PK			1.17 V	100	102.9	6.9
2	*6625.00	96.7 AV			1.17 V	100	89.8	6.9
3	13250.00	54.1 PK	74.0	-19.9	3.80 V	329	40.5	13.6
4	13250.00	41.7 AV	54.0	-12.3	3.80 V	329	28.1	13.6
5	19875.00	58.2 PK	74.0	-15.8	3.20 V	163	61.7	-3.5
6	19875.00	46.8 AV	54.0	-7.2	3.20 V	163	50.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.9 PK			1.10 H	201	103.7	7.2
2	*6705.00	99.3 AV			1.10 H	201	92.1	7.2
3	#13410.00	51.1 PK	88.2	-37.1	3.86 H	97	36.9	14.2
4	#13410.00	38.6 AV	68.2	-29.6	3.86 H	97	24.4	14.2
5	20115.00	55.5 PK	74.0	-18.5	3.56 H	318	59.0	-3.5
6	20115.00	44.0 AV	54.0	-10.0	3.56 H	318	47.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.8 PK			1.13 V	89	102.6	7.2
2	*6705.00	96.9 AV			1.13 V	89	89.7	7.2
3	#13410.00	53.8 PK	88.2	-34.4	3.86 V	321	39.6	14.2
4	#13410.00	41.5 AV	68.2	-26.7	3.86 V	321	27.3	14.2
5	20115.00	58.4 PK	74.0	-15.6	3.27 V	172	61.9	-3.5
6	20115.00	47.2 AV	54.0	-6.8	3.27 V	172	50.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	113.1 PK			1.09 H	200	106.1	7.0
2	*6785.00	100.4 AV			1.09 H	200	93.4	7.0
3	#13570.00	50.2 PK	88.2	-38.0	3.81 H	87	35.6	14.6
4	#13570.00	38.0 AV	68.2	-30.2	3.81 H	87	23.4	14.6
5	20355.00	56.0 PK	74.0	-18.0	3.52 H	335	59.1	-3.1
6	20355.00	44.6 AV	54.0	-9.4	3.52 H	335	47.7	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.4 PK			1.14 V	103	102.4	7.0
2	*6785.00	96.6 AV			1.14 V	103	89.6	7.0
3	#13570.00	54.2 PK	88.2	-34.0	3.86 V	316	39.6	14.6
4	#13570.00	41.7 AV	68.2	-26.5	3.86 V	316	27.1	14.6
5	20355.00	58.0 PK	74.0	-16.0	3.20 V	177	61.1	-3.1
6	20355.00	47.0 AV	54.0	-7.0	3.20 V	177	50.1	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.6 PK			1.08 H	197	95.4	7.2
2	*6865.00	91.1 AV			1.08 H	197	83.9	7.2
3	#13730.00	50.8 PK	88.2	-37.4	3.84 H	111	35.7	15.1
4	#13730.00	38.4 AV	68.2	-29.8	3.84 H	111	23.3	15.1
5	20595.00	55.0 PK	74.0	-19.0	3.46 H	306	58.3	-3.3
6	20595.00	44.0 AV	54.0	-10.0	3.46 H	306	47.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	100.5 PK			1.12 V	290	93.3	7.2
2	*6865.00	89.7 AV			1.12 V	290	82.5	7.2
3	#13730.00	54.2 PK	88.2	-34.0	3.85 V	325	39.1	15.1
4	#13730.00	42.0 AV	68.2	-26.2	3.85 V	325	26.9	15.1
5	20595.00	57.6 PK	74.0	-16.4	3.14 V	151	60.9	-3.3
6	20595.00	46.6 AV	54.0	-7.4	3.14 V	151	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	101.7 PK			1.03 H	196	94.2	7.5
2	*6945.00	89.5 AV			1.03 H	196	82.0	7.5
3	#13890.00	50.5 PK	88.2	-37.7	3.78 H	105	35.3	15.2
4	#13890.00	38.0 AV	68.2	-30.2	3.78 H	105	22.8	15.2
5	20835.00	55.3 PK	74.0	-18.7	3.51 H	330	58.2	-2.9
6	20835.00	44.3 AV	54.0	-9.7	3.51 H	330	47.2	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	100.8 PK			1.19 V	299	93.3	7.5
2	*6945.00	89.8 AV			1.19 V	299	82.3	7.5
3	#13890.00	54.3 PK	88.2	-33.9	3.80 V	312	39.1	15.2
4	#13890.00	41.9 AV	68.2	-26.3	3.80 V	312	26.7	15.2
5	20835.00	57.5 PK	74.0	-16.5	3.20 V	151	60.4	-2.9
6	20835.00	46.4 AV	54.0	-7.6	3.20 V	151	49.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.8 PK			1.11 H	194	93.4	8.4
2	*7025.00	90.5 AV			1.11 H	194	82.1	8.4
3	#7125.00	58.0 PK	88.2	-30.2	1.11 H	194	48.6	9.4
4	#7125.00	46.0 AV	68.2	-22.2	1.11 H	194	36.6	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.11 H	194	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.11 H	194	34.7	8.7
7	#14050.00	50.9 PK	88.2	-37.3	3.83 H	122	35.4	15.5
8	#14050.00	38.7 AV	68.2	-29.5	3.83 H	122	23.2	15.5
9	21075.00	55.3 PK	74.0	-18.7	3.51 H	306	57.5	-2.2
10	21075.00	44.3 AV	54.0	-9.7	3.51 H	306	46.5	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	101.1 PK			1.18 V	304	92.7	8.4
2	*7025.00	90.2 AV			1.18 V	304	81.8	8.4
3	#7125.00	58.7 PK	88.2	-29.5	1.18 V	304	49.3	9.4
4	#7125.00	46.3 AV	68.2	-21.9	1.18 V	304	36.9	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.18 V	304	46.3	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.18 V	304	34.9	8.7
7	#14050.00	54.3 PK	88.2	-33.9	3.81 V	327	38.8	15.5
8	#14050.00	41.8 AV	68.2	-26.4	3.81 V	327	26.3	15.5
9	21075.00	56.7 PK	74.0	-17.3	3.13 V	159	58.9	-2.2
10	21075.00	45.8 AV	54.0	-8.2	3.13 V	159	48.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.6 PK	88.2	-11.6	1.00 H	0	72.3	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.00 H	0	60.8	4.3
3	*6025.00	106.4 PK			1.07 H	243	102.2	4.2
4	*6025.00	94.6 AV			1.07 H	243	90.4	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.83 H	113	38.4	12.4
6	12050.00	38.6 AV	54.0	-15.4	3.83 H	113	26.2	12.4
7	18075.00	55.2 PK	74.0	-18.8	3.59 H	347	59.9	-4.7
8	18075.00	43.8 AV	54.0	-10.2	3.59 H	347	48.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.5 PK	88.2	-11.7	3.46 V	340	72.2	4.3
2	#5925.00	61.1 AV	68.2	-7.1	3.46 V	340	56.8	4.3
3	*6025.00	103.1 PK			3.46 V	340	98.9	4.2
4	*6025.00	91.7 AV			3.46 V	340	87.5	4.2
5	12050.00	53.6 PK	74.0	-20.4	3.81 V	315	41.2	12.4
6	12050.00	41.6 AV	54.0	-12.4	3.81 V	315	29.2	12.4
7	18075.00	57.7 PK	74.0	-16.3	3.27 V	171	62.4	-4.7
8	18075.00	46.4 AV	54.0	-7.6	3.27 V	171	51.1	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	108.9 PK			1.05 H	81	104.1	4.8
2	*6185.00	97.2 AV			1.05 H	81	92.4	4.8
3	12370.00	50.5 PK	74.0	-23.5	3.85 H	90	38.2	12.3
4	12370.00	38.1 AV	54.0	-15.9	3.85 H	90	25.8	12.3
5	18555.00	55.3 PK	74.0	-18.7	3.55 H	322	60.2	-4.9
6	18555.00	44.2 AV	54.0	-9.8	3.55 H	322	49.1	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	104.8 PK			1.17 V	87	100.0	4.8
2	*6185.00	93.3 AV			1.17 V	87	88.5	4.8
3	12370.00	53.4 PK	74.0	-20.6	3.84 V	305	41.1	12.3
4	12370.00	41.5 AV	54.0	-12.5	3.84 V	305	29.2	12.3
5	18555.00	57.7 PK	74.0	-16.3	3.23 V	178	62.6	-4.9
6	18555.00	46.4 AV	54.0	-7.6	3.23 V	178	51.3	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.9 PK			1.17 H	68	101.8	6.1
2	*6345.00	96.3 AV			1.17 H	68	90.2	6.1
3	12690.00	50.6 PK	74.0	-23.4	3.81 H	111	37.7	12.9
4	12690.00	38.4 AV	54.0	-15.6	3.81 H	111	25.5	12.9
5	19035.00	55.0 PK	74.0	-19.0	3.59 H	329	58.9	-3.9
6	19035.00	44.1 AV	54.0	-9.9	3.59 H	329	48.0	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	104.7 PK			1.16 V	96	98.6	6.1
2	*6345.00	93.0 AV			1.16 V	96	86.9	6.1
3	12690.00	53.6 PK	74.0	-20.4	3.92 V	324	40.7	12.9
4	12690.00	41.3 AV	54.0	-12.7	3.92 V	324	28.4	12.9
5	19035.00	57.5 PK	74.0	-16.5	3.24 V	178	61.4	-3.9
6	19035.00	46.5 AV	54.0	-7.5	3.24 V	178	50.4	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.2 PK			1.09 H	66	102.4	6.8
2	*6505.00	97.2 AV			1.09 H	66	90.4	6.8
3	#13010.00	50.2 PK	88.2	-38.0	3.77 H	103	37.0	13.2
4	#13010.00	38.1 AV	68.2	-30.1	3.77 H	103	24.9	13.2
5	19515.00	55.5 PK	74.0	-18.5	3.58 H	322	59.6	-4.1
6	19515.00	44.1 AV	54.0	-9.9	3.58 H	322	48.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	104.8 PK			1.16 V	122	98.0	6.8
2	*6505.00	92.8 AV			1.16 V	122	86.0	6.8
3	#13010.00	53.9 PK	88.2	-34.3	3.91 V	304	40.7	13.2
4	#13010.00	42.0 AV	68.2	-26.2	3.91 V	304	28.8	13.2
5	19515.00	58.7 PK	74.0	-15.3	3.25 V	185	62.8	-4.1
6	19515.00	47.3 AV	54.0	-6.7	3.25 V	185	51.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.8 PK			1.07 H	62	100.6	7.2
2	*6665.00	95.8 AV			1.07 H	62	88.6	7.2
3	13330.00	50.2 PK	74.0	-23.8	3.79 H	105	36.4	13.8
4	13330.00	38.2 AV	54.0	-15.8	3.79 H	105	24.4	13.8
5	19995.00	55.6 PK	74.0	-18.4	3.49 H	332	59.2	-3.6
6	19995.00	44.5 AV	54.0	-9.5	3.49 H	332	48.1	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.4 PK			1.21 V	92	98.2	7.2
2	*6665.00	94.5 AV			1.21 V	92	87.3	7.2
3	13330.00	53.2 PK	74.0	-20.8	3.84 V	313	39.4	13.8
4	13330.00	41.2 AV	54.0	-12.8	3.84 V	313	27.4	13.8
5	19995.00	58.3 PK	74.0	-15.7	3.22 V	174	61.9	-3.6
6	19995.00	47.1 AV	54.0	-6.9	3.22 V	174	50.7	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	103.5 PK			1.03 H	206	96.4	7.1
2	*6825.00	91.7 AV			1.03 H	206	84.6	7.1
3	#13650.00	50.3 PK	88.2	-37.9	3.81 H	107	35.4	14.9
4	#13650.00	38.1 AV	68.2	-30.1	3.81 H	107	23.2	14.9
5	20475.00	55.8 PK	74.0	-18.2	3.55 H	313	59.0	-3.2
6	20475.00	44.5 AV	54.0	-9.5	3.55 H	313	47.7	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	102.2 PK			1.14 V	298	95.1	7.1
2	*6825.00	90.4 AV			1.14 V	298	83.3	7.1
3	#13650.00	54.0 PK	88.2	-34.2	3.88 V	327	39.1	14.9
4	#13650.00	41.6 AV	68.2	-26.6	3.88 V	327	26.7	14.9
5	20475.00	56.7 PK	74.0	-17.3	3.22 V	144	59.9	-3.2
6	20475.00	45.8 AV	54.0	-8.2	3.22 V	144	49.0	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.1 PK			1.16 H	18	94.3	7.8
2	*6985.00	90.3 AV			1.16 H	18	82.5	7.8
3	#7125.00	69.4 PK	88.2	-18.8	1.16 H	18	60.0	9.4
4	#7125.00	57.5 AV	68.2	-10.7	1.16 H	18	48.1	9.4
5	7250.00	56.2 PK	74.0	-17.8	1.16 H	18	47.5	8.7
6	7250.00	44.6 AV	54.0	-9.4	1.16 H	18	35.9	8.7
7	#13970.00	51.2 PK	88.2	-37.0	3.76 H	117	35.7	15.5
8	#13970.00	38.7 AV	68.2	-29.5	3.76 H	117	23.2	15.5
9	20955.00	55.7 PK	74.0	-18.3	3.54 H	337	58.4	-2.7
10	20955.00	44.3 AV	54.0	-9.7	3.54 H	337	47.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.1 PK			1.18 V	302	94.3	7.8
2	*6985.00	90.2 AV			1.18 V	302	82.4	7.8
3	#7125.00	68.4 PK	88.2	-19.8	1.18 V	302	59.0	9.4
4	#7125.00	56.9 AV	68.2	-11.3	1.18 V	302	47.5	9.4
5	7250.00	56.4 PK	74.0	-17.6	1.18 V	302	47.7	8.7
6	7250.00	44.5 AV	54.0	-9.5	1.18 V	302	35.8	8.7
7	#13970.00	54.2 PK	88.2	-34.0	3.80 V	316	38.7	15.5
8	#13970.00	41.9 AV	68.2	-26.3	3.80 V	316	26.4	15.5
9	20955.00	56.8 PK	74.0	-17.2	3.15 V	149	59.5	-2.7
10	20955.00	46.0 AV	54.0	-8.0	3.15 V	149	48.7	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.1 PK	88.2	-18.1	1.00 H	0	65.8	4.3
2	#5925.00	50.3 AV	68.2	-17.9	1.00 H	0	46.0	4.3
3	*5955.00	121.1 PK			1.10 H	245	116.6	4.5
4	*5955.00	112.8 AV			1.10 H	245	108.3	4.5
5	11910.00	50.2 PK	74.0	-23.8	3.57 H	83	38.0	12.2
6	11910.00	38.7 AV	54.0	-15.3	3.57 H	83	26.5	12.2
7	17865.00	55.3 PK	74.0	-18.7	3.54 H	296	33.4	21.9
8	17865.00	44.1 AV	54.0	-9.9	3.54 H	296	22.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.8 PK	88.2	-20.4	1.15 V	105	63.5	4.3
2	#5925.00	49.2 AV	68.2	-19.0	1.15 V	105	44.9	4.3
3	*5955.00	119.6 PK			1.15 V	105	115.1	4.5
4	*5955.00	111.2 AV			1.15 V	105	106.7	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.90 V	321	41.6	12.2
6	11910.00	41.5 AV	54.0	-12.5	3.90 V	321	29.3	12.2
7	17865.00	57.9 PK	74.0	-16.1	3.23 V	157	36.0	21.9
8	17865.00	47.0 AV	54.0	-7.0	3.23 V	157	25.1	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	122.6 PK			1.07 H	63	117.8	4.8
2	*6195.00	113.9 AV			1.07 H	63	109.1	4.8
3	12390.00	50.6 PK	74.0	-23.4	3.76 H	61	38.3	12.3
4	12390.00	39.2 AV	54.0	-14.8	3.76 H	61	26.9	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.40 H	307	60.2	-5.0
6	18585.00	44.2 AV	54.0	-9.8	3.40 H	307	49.2	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.0 PK			3.60 V	360	113.2	4.8
2	*6195.00	112.6 AV			3.60 V	360	107.8	4.8
3	12390.00	53.8 PK	74.0	-20.2	3.90 V	312	41.5	12.3
4	12390.00	41.4 AV	54.0	-12.6	3.90 V	312	29.1	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.22 V	175	62.4	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.22 V	175	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	123.1 PK			1.10 H	65	116.7	6.4
2	*6415.00	115.5 AV			1.10 H	65	109.1	6.4
3	#12830.00	51.1 PK	88.2	-37.1	3.87 H	82	38.1	13.0
4	#12830.00	39.7 AV	68.2	-28.5	3.87 H	82	26.7	13.0
5	19245.00	55.4 PK	74.0	-18.6	3.54 H	318	59.2	-3.8
6	19245.00	43.4 AV	54.0	-10.6	3.54 H	318	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.4 PK			3.64 V	360	112.0	6.4
2	*6415.00	112.6 AV			3.64 V	360	106.2	6.4
3	#12830.00	53.4 PK	88.2	-34.8	3.81 V	323	40.4	13.0
4	#12830.00	41.3 AV	68.2	-26.9	3.81 V	323	28.3	13.0
5	19245.00	58.2 PK	74.0	-15.8	3.27 V	165	62.0	-3.8
6	19245.00	47.3 AV	54.0	-6.7	3.27 V	165	51.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.1 PK			1.13 H	35	94.7	6.4
2	*6435.00	90.5 AV			1.13 H	35	84.1	6.4
3	#12870.00	49.9 PK	88.2	-38.3	3.84 H	124	36.9	13.0
4	#12870.00	37.8 AV	68.2	-30.4	3.84 H	124	24.8	13.0
5	19305.00	55.1 PK	74.0	-18.9	3.56 H	310	58.8	-3.7
6	19305.00	43.7 AV	54.0	-10.3	3.56 H	310	47.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			1.25 V	294	95.1	6.4
2	*6435.00	90.8 AV			1.25 V	294	84.4	6.4
3	#12870.00	53.5 PK	88.2	-34.7	3.90 V	307	40.5	13.0
4	#12870.00	41.4 AV	68.2	-26.8	3.90 V	307	28.4	13.0
5	19305.00	57.7 PK	74.0	-16.3	3.13 V	149	61.4	-3.7
6	19305.00	46.7 AV	54.0	-7.3	3.13 V	149	50.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.7 PK			1.27 H	65	116.1	6.6
2	*6475.00	115.4 AV			1.27 H	65	108.8	6.6
3	#12950.00	50.7 PK	88.2	-37.5	3.82 H	97	37.6	13.1
4	#12950.00	39.0 AV	68.2	-29.2	3.82 H	97	25.9	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.65 H	318	59.2	-3.8
6	19425.00	43.9 AV	54.0	-10.1	3.65 H	318	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.5 PK			3.65 V	360	111.9	6.6
2	*6475.00	113.1 AV			3.65 V	360	106.5	6.6
3	#12950.00	54.1 PK	88.2	-34.1	3.80 V	307	41.0	13.1
4	#12950.00	41.7 AV	68.2	-26.5	3.80 V	307	28.6	13.1
5	19425.00	58.3 PK	74.0	-15.7	3.26 V	175	62.1	-3.8
6	19425.00	47.0 AV	54.0	-7.0	3.26 V	175	50.8	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.5 PK			1.10 H	64	94.6	6.9
2	*6515.00	91.1 AV			1.10 H	64	84.2	6.9
3	#13030.00	51.0 PK	88.2	-37.2	3.83 H	103	37.8	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.83 H	103	25.5	13.2
5	19545.00	55.0 PK	74.0	-19.0	3.57 H	306	59.1	-4.1
6	19545.00	43.9 AV	54.0	-10.1	3.57 H	306	48.0	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.9 PK			1.20 V	293	94.0	6.9
2	*6515.00	90.3 AV			1.20 V	293	83.4	6.9
3	#13030.00	54.2 PK	88.2	-34.0	3.85 V	318	41.0	13.2
4	#13030.00	41.9 AV	68.2	-26.3	3.85 V	318	28.7	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.17 V	158	60.8	-4.1
6	19545.00	46.0 AV	54.0	-8.0	3.17 V	158	50.1	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.1 PK			1.05 H	65	117.2	6.9
2	*6535.00	117.6 AV			1.05 H	65	110.7	6.9
3	#13070.00	51.2 PK	88.2	-37.0	3.79 H	109	38.0	13.2
4	#13070.00	39.5 AV	68.2	-28.7	3.79 H	109	26.3	13.2
5	19605.00	56.2 PK	74.0	-17.8	3.62 H	300	60.2	-4.0
6	19605.00	45.1 AV	54.0	-8.9	3.62 H	300	49.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.1 PK			3.60 V	360	111.2	6.9
2	*6535.00	112.4 AV			3.60 V	360	105.5	6.9
3	#13070.00	54.1 PK	88.2	-34.1	3.83 V	321	40.9	13.2
4	#13070.00	41.8 AV	68.2	-26.4	3.83 V	321	28.6	13.2
5	19605.00	58.3 PK	74.0	-15.7	3.18 V	172	62.3	-4.0
6	19605.00	47.3 AV	54.0	-6.7	3.18 V	172	51.3	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.8 PK			1.02 H	61	114.6	7.2
2	*6695.00	115.3 AV			1.02 H	61	108.1	7.2
3	13390.00	50.7 PK	74.0	-23.3	3.72 H	90	36.7	14.0
4	13390.00	39.4 AV	54.0	-14.6	3.72 H	90	25.4	14.0
5	20085.00	55.0 PK	74.0	-19.0	3.81 H	305	58.5	-3.5
6	20085.00	44.1 AV	54.0	-9.9	3.81 H	305	47.6	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.9 PK			3.61 V	350	110.7	7.2
2	*6695.00	112.6 AV			3.61 V	350	105.4	7.2
3	13390.00	53.3 PK	74.0	-20.7	3.82 V	320	39.3	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.82 V	320	27.2	14.0
5	20085.00	58.3 PK	74.0	-15.7	3.18 V	166	61.8	-3.5
6	20085.00	47.0 AV	54.0	-7.0	3.18 V	166	50.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.2 PK			1.31 H	56	115.0	7.2
2	*6855.00	115.9 AV			1.31 H	56	108.7	7.2
3	#13710.00	51.1 PK	88.2	-37.1	3.83 H	100	35.9	15.2
4	#13710.00	38.4 AV	68.2	-29.8	3.83 H	100	23.2	15.2
5	20565.00	55.7 PK	74.0	-18.3	3.51 H	295	59.0	-3.3
6	20565.00	44.6 AV	54.0	-9.4	3.51 H	295	47.9	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			3.60 V	360	111.2	7.2
2	*6855.00	112.8 AV			3.60 V	360	105.6	7.2
3	#13710.00	53.7 PK	88.2	-34.5	3.87 V	315	38.5	15.2
4	#13710.00	41.8 AV	68.2	-26.4	3.87 V	315	26.6	15.2
5	20565.00	58.5 PK	74.0	-15.5	3.25 V	183	61.8	-3.3
6	20565.00	47.2 AV	54.0	-6.8	3.25 V	183	50.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.9 PK			1.01 H	52	94.7	7.2
2	*6875.00	91.2 AV			1.01 H	52	84.0	7.2
3	#13750.00	50.9 PK	88.2	-37.3	3.80 H	99	35.8	15.1
4	#13750.00	38.8 AV	68.2	-29.4	3.80 H	99	23.7	15.1
5	20625.00	55.1 PK	74.0	-18.9	3.56 H	332	58.4	-3.3
6	20625.00	43.9 AV	54.0	-10.1	3.56 H	332	47.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.8 PK			1.18 V	277	94.6	7.2
2	*6875.00	91.0 AV			1.18 V	277	83.8	7.2
3	#13750.00	53.5 PK	88.2	-34.7	3.86 V	302	38.4	15.1
4	#13750.00	41.1 AV	68.2	-27.1	3.86 V	302	26.0	15.1
5	20625.00	57.1 PK	74.0	-16.9	3.24 V	167	60.4	-3.3
6	20625.00	45.9 AV	54.0	-8.1	3.24 V	167	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.8 PK			1.01 H	26	91.8	8.0
2	*6995.00	88.6 AV			1.01 H	26	80.6	8.0
3	#13990.00	50.6 PK	88.2	-37.6	3.80 H	128	35.0	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.80 H	128	22.6	15.6
5	20985.00	54.9 PK	74.0	-19.1	3.56 H	326	57.7	-2.8
6	20985.00	43.8 AV	54.0	-10.2	3.56 H	326	46.6	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.6 PK			1.19 V	284	93.6	8.0
2	*6995.00	90.8 AV			1.19 V	284	82.8	8.0
3	#13990.00	53.9 PK	88.2	-34.3	3.81 V	302	38.3	15.6
4	#13990.00	41.5 AV	68.2	-26.7	3.81 V	302	25.9	15.6
5	20985.00	57.4 PK	74.0	-16.6	3.19 V	153	60.2	-2.8
6	20985.00	46.6 AV	54.0	-7.4	3.19 V	153	49.4	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.4 PK			1.19 H	346	88.9	9.5
2	*7115.00	88.4 AV			1.19 H	346	78.9	9.5
3	#7125.00	85.3 PK	88.2	-2.9	1.19 H	346	75.9	9.4
4	#7125.00	55.5 AV	68.2	-12.7	1.19 H	346	46.1	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.19 H	346	46.2	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.19 H	346	34.9	8.7
7	#14230.00	50.5 PK	88.2	-37.7	3.84 H	110	35.2	15.3
8	#14230.00	38.3 AV	68.2	-29.9	3.84 H	110	23.0	15.3
9	21345.00	55.7 PK	74.0	-18.3	3.53 H	335	57.3	-1.6
10	21345.00	44.4 AV	54.0	-9.6	3.53 H	335	46.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	98.6 PK			1.07 V	317	89.1	9.5
2	*7115.00	88.4 AV			1.07 V	317	78.9	9.5
3	#7125.00	84.5 PK	88.2	-3.7	1.07 V	317	75.1	9.4
4	#7125.00	55.3 AV	68.2	-12.9	1.07 V	317	45.9	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.07 V	317	46.9	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.07 V	317	34.8	8.7
7	#14230.00	53.8 PK	88.2	-34.4	3.86 V	320	38.5	15.3
8	#14230.00	41.2 AV	68.2	-27.0	3.86 V	320	25.9	15.3
9	21345.00	57.6 PK	74.0	-16.4	3.13 V	167	59.2	-1.6
10	21345.00	46.4 AV	54.0	-7.6	3.13 V	167	48.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.8 PK	88.2	-13.4	1.00 H	0	70.5	4.3
2	#5925.00	52.1 AV	68.2	-16.1	1.00 H	0	47.8	4.3
3	*5955.00	119.8 PK			1.04 H	245	115.3	4.5
4	*5955.00	110.8 AV			1.04 H	245	106.3	4.5
5	11910.00	49.9 PK	74.0	-24.1	3.92 H	83	37.7	12.2
6	11910.00	39.1 AV	54.0	-14.9	3.92 H	83	26.9	12.2
7	17865.00	55.3 PK	74.0	-18.7	3.82 H	332	33.4	21.9
8	17865.00	43.8 AV	54.0	-10.2	3.82 H	332	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.7 PK	88.2	-16.5	3.54 V	339	67.4	4.3
2	#5925.00	51.4 AV	68.2	-16.8	3.54 V	339	47.1	4.3
3	*5955.00	118.5 PK			3.54 V	339	114.0	4.5
4	*5955.00	109.4 AV			3.54 V	339	104.9	4.5
5	11910.00	54.0 PK	74.0	-20.0	3.87 V	301	41.8	12.2
6	11910.00	41.6 AV	54.0	-12.4	3.87 V	301	29.4	12.2
7	17865.00	57.6 PK	74.0	-16.4	3.23 V	156	35.7	21.9
8	17865.00	46.6 AV	54.0	-7.4	3.23 V	156	24.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	120.9 PK			1.04 H	249	116.1	4.8
2	*6195.00	112.1 AV			1.04 H	249	107.3	4.8
3	12390.00	50.9 PK	74.0	-23.1	3.70 H	110	38.6	12.3
4	12390.00	38.1 AV	54.0	-15.9	3.70 H	110	25.8	12.3
5	18585.00	54.6 PK	74.0	-19.4	3.65 H	308	59.6	-5.0
6	18585.00	44.0 AV	54.0	-10.0	3.65 H	308	49.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	118.5 PK			3.57 V	344	113.7	4.8
2	*6195.00	109.2 AV			3.57 V	344	104.4	4.8
3	12390.00	53.9 PK	74.0	-20.1	3.85 V	310	41.6	12.3
4	12390.00	42.0 AV	54.0	-12.0	3.85 V	310	29.7	12.3
5	18585.00	57.4 PK	74.0	-16.6	3.24 V	178	62.4	-5.0
6	18585.00	46.5 AV	54.0	-7.5	3.24 V	178	51.5	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.7 PK			1.02 H	233	116.3	6.4
2	*6415.00	114.6 AV			1.02 H	233	108.2	6.4
3	#12830.00	50.7 PK	88.2	-37.5	3.72 H	79	37.7	13.0
4	#12830.00	39.3 AV	68.2	-28.9	3.72 H	79	26.3	13.0
5	19245.00	55.6 PK	74.0	-18.4	3.56 H	304	59.4	-3.8
6	19245.00	44.0 AV	54.0	-10.0	3.56 H	304	47.8	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.7 PK			3.58 V	343	112.3	6.4
2	*6415.00	109.7 AV			3.58 V	343	103.3	6.4
3	#12830.00	53.6 PK	88.2	-34.6	3.86 V	323	40.6	13.0
4	#12830.00	41.1 AV	68.2	-27.1	3.86 V	323	28.1	13.0
5	19245.00	57.5 PK	74.0	-16.5	3.24 V	173	61.3	-3.8
6	19245.00	46.6 AV	54.0	-7.4	3.24 V	173	50.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			1.11 H	69	95.1	6.4
2	*6435.00	90.5 AV			1.11 H	69	84.1	6.4
3	#12870.00	50.5 PK	88.2	-37.7	3.76 H	119	37.5	13.0
4	#12870.00	38.2 AV	68.2	-30.0	3.76 H	119	25.2	13.0
5	19305.00	55.4 PK	74.0	-18.6	3.46 H	322	59.1	-3.7
6	19305.00	44.3 AV	54.0	-9.7	3.46 H	322	48.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.7 PK			1.10 V	321	94.3	6.4
2	*6435.00	90.4 AV			1.10 V	321	84.0	6.4
3	#12870.00	53.8 PK	88.2	-34.4	3.81 V	314	40.8	13.0
4	#12870.00	41.8 AV	68.2	-26.4	3.81 V	314	28.8	13.0
5	19305.00	57.0 PK	74.0	-17.0	3.18 V	152	60.7	-3.7
6	19305.00	45.9 AV	54.0	-8.1	3.18 V	152	49.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	122.3 PK			1.00 H	243	115.7	6.6
2	*6475.00	114.3 AV			1.00 H	243	107.7	6.6
3	#12950.00	49.6 PK	88.2	-38.6	3.84 H	94	36.5	13.1
4	#12950.00	38.9 AV	68.2	-29.3	3.84 H	94	25.8	13.1
5	19425.00	54.4 PK	74.0	-19.6	3.59 H	309	58.2	-3.8
6	19425.00	44.1 AV	54.0	-9.9	3.59 H	309	47.9	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.6 PK			3.59 V	333	112.0	6.6
2	*6475.00	109.3 AV			3.59 V	333	102.7	6.6
3	#12950.00	53.9 PK	88.2	-34.3	3.90 V	329	40.8	13.1
4	#12950.00	41.4 AV	68.2	-26.8	3.90 V	329	28.3	13.1
5	19425.00	57.8 PK	74.0	-16.2	3.27 V	182	61.6	-3.8
6	19425.00	46.5 AV	54.0	-7.5	3.27 V	182	50.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.2 PK			1.08 H	61	94.3	6.9
2	*6515.00	90.8 AV			1.08 H	61	83.9	6.9
3	#13030.00	50.2 PK	88.2	-38.0	3.80 H	117	37.0	13.2
4	#13030.00	37.8 AV	68.2	-30.4	3.80 H	117	24.6	13.2
5	19545.00	55.1 PK	74.0	-18.9	3.54 H	334	59.2	-4.1
6	19545.00	44.0 AV	54.0	-10.0	3.54 H	334	48.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.2 PK			1.15 V	319	94.3	6.9
2	*6515.00	90.7 AV			1.15 V	319	83.8	6.9
3	#13030.00	53.3 PK	88.2	-34.9	3.91 V	309	40.1	13.2
4	#13030.00	41.1 AV	68.2	-27.1	3.91 V	309	27.9	13.2
5	19545.00	57.0 PK	74.0	-17.0	3.16 V	168	61.1	-4.1
6	19545.00	45.9 AV	54.0	-8.1	3.16 V	168	50.0	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.7 PK			1.07 H	248	116.8	6.9
2	*6535.00	116.1 AV			1.07 H	248	109.2	6.9
3	#13070.00	50.9 PK	88.2	-37.3	3.55 H	103	37.7	13.2
4	#13070.00	38.6 AV	68.2	-29.6	3.55 H	103	25.4	13.2
5	19605.00	56.3 PK	74.0	-17.7	3.75 H	309	60.3	-4.0
6	19605.00	44.8 AV	54.0	-9.2	3.75 H	309	48.8	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.4 PK			3.49 V	323	111.5	6.9
2	*6535.00	109.0 AV			3.49 V	323	102.1	6.9
3	#13070.00	53.5 PK	88.2	-34.7	3.88 V	315	40.3	13.2
4	#13070.00	41.3 AV	68.2	-26.9	3.88 V	315	28.1	13.2
5	19605.00	57.9 PK	74.0	-16.1	3.24 V	180	61.9	-4.0
6	19605.00	46.7 AV	54.0	-7.3	3.24 V	180	50.7	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	122.8 PK			1.08 H	244	115.6	7.2
2	*6695.00	113.7 AV			1.08 H	244	106.5	7.2
3	13390.00	51.6 PK	74.0	-22.4	3.66 H	114	37.6	14.0
4	13390.00	38.9 AV	54.0	-15.1	3.66 H	114	24.9	14.0
5	20085.00	55.9 PK	74.0	-18.1	3.65 H	327	59.4	-3.5
6	20085.00	44.6 AV	54.0	-9.4	3.65 H	327	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.6 PK			3.50 V	342	111.4	7.2
2	*6695.00	109.7 AV			3.50 V	342	102.5	7.2
3	13390.00	53.6 PK	74.0	-20.4	3.80 V	319	39.6	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.80 V	319	27.2	14.0
5	20085.00	57.7 PK	74.0	-16.3	3.22 V	180	61.2	-3.5
6	20085.00	46.8 AV	54.0	-7.2	3.22 V	180	50.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.2 PK			1.30 H	56	115.0	7.2
2	*6855.00	114.1 AV			1.30 H	56	106.9	7.2
3	#13710.00	51.5 PK	88.2	-36.7	3.86 H	122	36.3	15.2
4	#13710.00	39.9 AV	68.2	-28.3	3.86 H	122	24.7	15.2
5	20565.00	55.2 PK	74.0	-18.8	3.48 H	284	58.5	-3.3
6	20565.00	44.1 AV	54.0	-9.9	3.48 H	284	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.4 PK			3.56 V	349	111.2	7.2
2	*6855.00	109.4 AV			3.56 V	349	102.2	7.2
3	#13710.00	53.9 PK	88.2	-34.3	3.88 V	301	38.7	15.2
4	#13710.00	41.7 AV	68.2	-26.5	3.88 V	301	26.5	15.2
5	20565.00	57.9 PK	74.0	-16.1	3.17 V	180	61.2	-3.3
6	20565.00	46.6 AV	54.0	-7.4	3.17 V	180	49.9	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.9 PK			1.19 H	353	93.7	7.2
2	*6875.00	90.5 AV			1.19 H	353	83.3	7.2
3	#13750.00	50.5 PK	88.2	-37.7	3.86 H	115	35.4	15.1
4	#13750.00	38.2 AV	68.2	-30.0	3.86 H	115	23.1	15.1
5	20625.00	55.1 PK	74.0	-18.9	3.50 H	331	58.4	-3.3
6	20625.00	44.0 AV	54.0	-10.0	3.50 H	331	47.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.4 PK			1.09 V	304	94.2	7.2
2	*6875.00	90.7 AV			1.09 V	304	83.5	7.2
3	#13750.00	53.5 PK	88.2	-34.7	3.84 V	306	38.4	15.1
4	#13750.00	41.5 AV	68.2	-26.7	3.84 V	306	26.4	15.1
5	20625.00	56.9 PK	74.0	-17.1	3.13 V	147	60.2	-3.3
6	20625.00	46.0 AV	54.0	-8.0	3.13 V	147	49.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	101.0 PK			1.23 H	351	93.0	8.0
2	*6995.00	90.6 AV			1.23 H	351	82.6	8.0
3	#13990.00	50.4 PK	88.2	-37.8	3.79 H	102	34.8	15.6
4	#13990.00	38.2 AV	68.2	-30.0	3.79 H	102	22.6	15.6
5	20985.00	55.7 PK	74.0	-18.3	3.54 H	323	58.5	-2.8
6	20985.00	44.4 AV	54.0	-9.6	3.54 H	323	47.2	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	100.4 PK			1.06 V	295	92.4	8.0
2	*6995.00	90.2 AV			1.06 V	295	82.2	8.0
3	#13990.00	54.6 PK	88.2	-33.6	3.91 V	306	39.0	15.6
4	#13990.00	42.1 AV	68.2	-26.1	3.91 V	306	26.5	15.6
5	20985.00	57.1 PK	74.0	-16.9	3.15 V	153	59.9	-2.8
6	20985.00	46.2 AV	54.0	-7.8	3.15 V	153	49.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.9 PK			1.18 H	345	91.4	9.5
2	*7115.00	90.7 AV			1.18 H	345	81.2	9.5
3	#7125.00	85.8 PK	88.2	-2.4	1.18 H	345	76.4	9.4
4	#7125.00	56.8 AV	68.2	-11.4	1.18 H	345	47.4	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.18 H	345	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.18 H	345	34.8	8.7
7	#14230.00	49.8 PK	88.2	-38.4	3.77 H	124	34.5	15.3
8	#14230.00	37.8 AV	68.2	-30.4	3.77 H	124	22.5	15.3
9	21345.00	55.1 PK	74.0	-18.9	3.55 H	330	56.7	-1.6
10	21345.00	44.2 AV	54.0	-9.8	3.55 H	330	45.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			1.10 V	311	91.5	9.5
2	*7115.00	90.6 AV			1.10 V	311	81.1	9.5
3	#7125.00	85.6 PK	88.2	-2.6	1.10 V	311	76.2	9.4
4	#7125.00	56.1 AV	68.2	-12.1	1.10 V	311	46.7	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.10 V	311	46.9	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.10 V	311	34.7	8.7
7	#14230.00	53.7 PK	88.2	-34.5	3.85 V	330	38.4	15.3
8	#14230.00	41.4 AV	68.2	-26.8	3.85 V	330	26.1	15.3
9	21345.00	57.2 PK	74.0	-16.8	3.18 V	142	58.8	-1.6
10	21345.00	46.1 AV	54.0	-7.9	3.18 V	142	47.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	74.0 PK	88.2	-14.2	1.07 H	244	69.7	4.3
2	#5925.00	56.1 AV	68.2	-12.1	1.07 H	244	51.8	4.3
3	*5955.00	118.6 PK			1.07 H	244	114.1	4.5
4	*5955.00	108.5 AV			1.07 H	244	104.0	4.5
5	11910.00	51.4 PK	74.0	-22.6	3.82 H	80	39.2	12.2
6	11910.00	39.3 AV	54.0	-14.7	3.82 H	80	27.1	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.64 H	310	32.9	21.9
8	17865.00	43.8 AV	54.0	-10.2	3.64 H	310	21.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.9 PK	88.2	-21.3	3.38 V	342	62.6	4.3
2	#5925.00	51.4 AV	68.2	-16.8	3.38 V	342	47.1	4.3
3	*5955.00	117.8 PK			3.38 V	342	113.3	4.5
4	*5955.00	106.8 AV			3.38 V	342	102.3	4.5
5	11910.00	53.5 PK	74.0	-20.5	3.89 V	329	41.3	12.2
6	11910.00	41.2 AV	54.0	-12.8	3.89 V	329	29.0	12.2
7	17865.00	57.7 PK	74.0	-16.3	3.20 V	163	35.8	21.9
8	17865.00	46.7 AV	54.0	-7.3	3.20 V	163	24.8	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.5 PK			1.09 H	253	114.7	4.8
2	*6195.00	110.1 AV			1.09 H	253	105.3	4.8
3	12390.00	50.8 PK	74.0	-23.2	3.62 H	86	38.5	12.3
4	12390.00	38.9 AV	54.0	-15.1	3.62 H	86	26.6	12.3
5	18585.00	56.6 PK	74.0	-17.4	3.52 H	298	61.6	-5.0
6	18585.00	44.0 AV	54.0	-10.0	3.52 H	298	49.0	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	117.8 PK			3.38 V	337	113.0	4.8
2	*6195.00	106.6 AV			3.38 V	337	101.8	4.8
3	12390.00	54.2 PK	74.0	-19.8	3.92 V	316	41.9	12.3
4	12390.00	41.9 AV	54.0	-12.1	3.92 V	316	29.6	12.3
5	18585.00	57.5 PK	74.0	-16.5	3.26 V	161	62.5	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.26 V	161	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			1.03 H	258	113.9	6.4
2	*6415.00	112.4 AV			1.03 H	258	106.0	6.4
3	#12830.00	50.8 PK	88.2	-37.4	3.63 H	77	37.8	13.0
4	#12830.00	38.7 AV	68.2	-29.5	3.63 H	77	25.7	13.0
5	19245.00	54.6 PK	74.0	-19.4	3.78 H	305	58.4	-3.8
6	19245.00	43.4 AV	54.0	-10.6	3.78 H	305	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.2 PK			3.39 V	358	110.8	6.4
2	*6415.00	106.3 AV			3.39 V	358	99.9	6.4
3	#12830.00	53.8 PK	88.2	-34.4	3.86 V	325	40.8	13.0
4	#12830.00	41.3 AV	68.2	-26.9	3.86 V	325	28.3	13.0
5	19245.00	57.9 PK	74.0	-16.1	3.20 V	158	61.7	-3.8
6	19245.00	46.7 AV	54.0	-7.3	3.20 V	158	50.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.5 PK			1.15 H	68	96.1	6.4
2	*6435.00	91.5 AV			1.15 H	68	85.1	6.4
3	#12870.00	50.6 PK	88.2	-37.6	3.76 H	110	37.6	13.0
4	#12870.00	38.3 AV	68.2	-29.9	3.76 H	110	25.3	13.0
5	19305.00	55.1 PK	74.0	-18.9	3.54 H	313	58.8	-3.7
6	19305.00	43.8 AV	54.0	-10.2	3.54 H	313	47.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	101.5 PK			1.23 V	285	95.1	6.4
2	*6435.00	90.7 AV			1.23 V	285	84.3	6.4
3	#12870.00	53.5 PK	88.2	-34.7	3.82 V	305	40.5	13.0
4	#12870.00	41.1 AV	68.2	-27.1	3.82 V	305	28.1	13.0
5	19305.00	56.9 PK	74.0	-17.1	3.19 V	155	60.6	-3.7
6	19305.00	46.2 AV	54.0	-7.8	3.19 V	155	49.9	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.6 PK			1.02 H	246	113.0	6.6
2	*6475.00	112.1 AV			1.02 H	246	105.5	6.6
3	#12950.00	50.4 PK	88.2	-37.8	3.74 H	106	37.3	13.1
4	#12950.00	39.8 AV	68.2	-28.4	3.74 H	106	26.7	13.1
5	19425.00	55.0 PK	74.0	-19.0	3.60 H	323	58.8	-3.8
6	19425.00	44.9 AV	54.0	-9.1	3.60 H	323	48.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.1 PK			3.36 V	344	111.5	6.6
2	*6475.00	107.2 AV			3.36 V	344	100.6	6.6
3	#12950.00	53.9 PK	88.2	-34.3	3.85 V	311	40.8	13.1
4	#12950.00	41.9 AV	68.2	-26.3	3.85 V	311	28.8	13.1
5	19425.00	57.6 PK	74.0	-16.4	3.20 V	167	61.4	-3.8
6	19425.00	46.5 AV	54.0	-7.5	3.20 V	167	50.3	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.2 PK			1.07 H	51	95.3	6.9
2	*6515.00	91.4 AV			1.07 H	51	84.5	6.9
3	#13030.00	50.8 PK	88.2	-37.4	3.74 H	128	37.6	13.2
4	#13030.00	38.7 AV	68.2	-29.5	3.74 H	128	25.5	13.2
5	19545.00	55.1 PK	74.0	-18.9	3.48 H	310	59.2	-4.1
6	19545.00	43.8 AV	54.0	-10.2	3.48 H	310	47.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	101.9 PK			1.26 V	273	95.0	6.9
2	*6515.00	90.9 AV			1.26 V	273	84.0	6.9
3	#13030.00	54.2 PK	88.2	-34.0	3.81 V	325	41.0	13.2
4	#13030.00	41.9 AV	68.2	-26.3	3.81 V	325	28.7	13.2
5	19545.00	57.0 PK	74.0	-17.0	3.13 V	141	61.1	-4.1
6	19545.00	46.1 AV	54.0	-7.9	3.13 V	141	50.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			1.05 H	247	114.7	6.9
2	*6535.00	114.2 AV			1.05 H	247	107.3	6.9
3	#13070.00	50.1 PK	88.2	-38.1	3.79 H	113	36.9	13.2
4	#13070.00	39.1 AV	68.2	-29.1	3.79 H	113	25.9	13.2
5	19605.00	55.6 PK	74.0	-18.4	3.70 H	322	59.6	-4.0
6	19605.00	45.0 AV	54.0	-9.0	3.70 H	322	49.0	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	117.7 PK			3.32 V	347	110.8	6.9
2	*6535.00	106.6 AV			3.32 V	347	99.7	6.9
3	#13070.00	54.0 PK	88.2	-34.2	3.88 V	305	40.8	13.2
4	#13070.00	41.6 AV	68.2	-26.6	3.88 V	305	28.4	13.2
5	19605.00	58.1 PK	74.0	-15.9	3.20 V	178	62.1	-4.0
6	19605.00	46.8 AV	54.0	-7.2	3.20 V	178	50.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	120.5 PK			1.07 H	240	113.3	7.2
2	*6695.00	112.1 AV			1.07 H	240	104.9	7.2
3	13390.00	49.7 PK	74.0	-24.3	3.70 H	87	35.7	14.0
4	13390.00	39.6 AV	54.0	-14.4	3.70 H	87	25.6	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.63 H	325	58.8	-3.5
6	20085.00	45.3 AV	54.0	-8.7	3.63 H	325	48.8	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	117.7 PK			3.40 V	341	110.5	7.2
2	*6695.00	106.9 AV			3.40 V	341	99.7	7.2
3	13390.00	53.7 PK	74.0	-20.3	3.87 V	316	39.7	14.0
4	13390.00	41.2 AV	54.0	-12.8	3.87 V	316	27.2	14.0
5	20085.00	57.5 PK	74.0	-16.5	3.20 V	158	61.0	-3.5
6	20085.00	46.6 AV	54.0	-7.4	3.20 V	158	50.1	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.7 PK			1.31 H	55	113.5	7.2
2	*6855.00	111.3 AV			1.31 H	55	104.1	7.2
3	#13710.00	51.0 PK	88.2	-37.2	3.86 H	90	35.8	15.2
4	#13710.00	39.1 AV	68.2	-29.1	3.86 H	90	23.9	15.2
5	20565.00	55.5 PK	74.0	-18.5	3.65 H	335	58.8	-3.3
6	20565.00	44.7 AV	54.0	-9.3	3.65 H	335	48.0	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.3 PK			3.33 V	329	110.1	7.2
2	*6855.00	106.6 AV			3.33 V	329	99.4	7.2
3	#13710.00	53.6 PK	88.2	-34.6	3.85 V	329	38.4	15.2
4	#13710.00	41.2 AV	68.2	-27.0	3.85 V	329	26.0	15.2
5	20565.00	58.1 PK	74.0	-15.9	3.18 V	181	61.4	-3.3
6	20565.00	47.1 AV	54.0	-6.9	3.18 V	181	50.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			1.10 H	59	95.2	7.2
2	*6875.00	91.3 AV			1.10 H	59	84.1	7.2
3	#13750.00	51.1 PK	88.2	-37.1	3.75 H	125	36.0	15.1
4	#13750.00	38.7 AV	68.2	-29.5	3.75 H	125	23.6	15.1
5	20625.00	55.6 PK	74.0	-18.4	3.45 H	334	58.9	-3.3
6	20625.00	44.4 AV	54.0	-9.6	3.45 H	334	47.7	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.2 PK			1.23 V	286	95.0	7.2
2	*6875.00	91.1 AV			1.23 V	286	83.9	7.2
3	#13750.00	53.4 PK	88.2	-34.8	3.88 V	327	38.3	15.1
4	#13750.00	41.3 AV	68.2	-26.9	3.88 V	327	26.2	15.1
5	20625.00	57.2 PK	74.0	-16.8	3.21 V	143	60.5	-3.3
6	20625.00	46.1 AV	54.0	-7.9	3.21 V	143	49.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.1 PK			1.12 H	52	94.1	8.0
2	*6995.00	91.0 AV			1.12 H	52	83.0	8.0
3	#13990.00	50.3 PK	88.2	-37.9	3.75 H	104	34.7	15.6
4	#13990.00	38.3 AV	68.2	-29.9	3.75 H	104	22.7	15.6
5	20985.00	55.5 PK	74.0	-18.5	3.56 H	316	58.3	-2.8
6	20985.00	44.2 AV	54.0	-9.8	3.56 H	316	47.0	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.3 PK			1.11 V	324	94.3	8.0
2	*6995.00	91.2 AV			1.11 V	324	83.2	8.0
3	#13990.00	54.4 PK	88.2	-33.8	3.86 V	312	38.8	15.6
4	#13990.00	42.0 AV	68.2	-26.2	3.86 V	312	26.4	15.6
5	20985.00	57.6 PK	74.0	-16.4	3.17 V	141	60.4	-2.8
6	20985.00	46.7 AV	54.0	-7.3	3.17 V	141	49.5	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.2 PK			1.19 H	346	90.7	9.5
2	*7115.00	89.3 AV			1.19 H	346	79.8	9.5
3	#7125.00	86.0 PK	88.2	-2.2	1.19 H	346	76.6	9.4
4	#7125.00	56.0 AV	68.2	-12.2	1.19 H	346	46.6	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.19 H	346	46.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.19 H	346	34.8	8.7
7	#14230.00	50.5 PK	88.2	-37.7	3.79 H	112	35.2	15.3
8	#14230.00	37.9 AV	68.2	-30.3	3.79 H	112	22.6	15.3
9	21345.00	55.5 PK	74.0	-18.5	3.50 H	306	57.1	-1.6
10	21345.00	44.2 AV	54.0	-9.8	3.50 H	306	45.8	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.4 PK			1.12 V	315	90.9	9.5
2	*7115.00	89.3 AV			1.12 V	315	79.8	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.12 V	315	77.1	9.4
4	#7125.00	56.0 AV	68.2	-12.2	1.12 V	315	46.6	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.12 V	315	46.2	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.12 V	315	34.7	8.7
7	#14230.00	53.6 PK	88.2	-34.6	3.85 V	324	38.3	15.3
8	#14230.00	41.5 AV	68.2	-26.7	3.85 V	324	26.2	15.3
9	21345.00	56.8 PK	74.0	-17.2	3.25 V	141	58.4	-1.6
10	21345.00	46.0 AV	54.0	-8.0	3.25 V	141	47.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.1 PK	88.2	-15.1	1.08 H	245	68.8	4.3
2	#5925.00	49.9 AV	68.2	-18.3	1.08 H	245	45.6	4.3
3	*5955.00	120.2 PK			1.08 H	245	115.7	4.5
4	*5955.00	109.3 AV			1.08 H	245	104.8	4.5
5	11910.00	50.8 PK	74.0	-23.2	3.63 H	109	38.6	12.2
6	11910.00	39.0 AV	54.0	-15.0	3.63 H	109	26.8	12.2
7	17865.00	55.0 PK	74.0	-19.0	3.77 H	304	33.1	21.9
8	17865.00	44.6 AV	54.0	-9.4	3.77 H	304	22.7	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.3 PK	88.2	-17.9	3.51 V	346	66.0	4.3
2	#5925.00	48.6 AV	68.2	-19.6	3.51 V	346	44.3	4.3
3	*5955.00	118.7 PK			3.51 V	346	114.2	4.5
4	*5955.00	108.5 AV			3.51 V	346	104.0	4.5
5	11910.00	53.8 PK	74.0	-20.2	3.85 V	314	41.6	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.85 V	314	29.6	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.23 V	169	35.3	21.9
8	17865.00	46.4 AV	54.0	-7.6	3.23 V	169	24.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.1 PK			1.10 H	25	96.5	6.6
2	*6475.00	91.9 AV			1.10 H	25	85.3	6.6
3	#12950.00	49.9 PK	88.2	-38.3	3.78 H	114	36.8	13.1
4	#12950.00	37.7 AV	68.2	-30.5	3.78 H	114	24.6	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.48 H	342	59.2	-3.8
6	19425.00	44.4 AV	54.0	-9.6	3.48 H	342	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.5 PK			1.13 V	320	94.9	6.6
2	*6475.00	91.6 AV			1.13 V	320	85.0	6.6
3	#12950.00	54.1 PK	88.2	-34.1	3.93 V	315	41.0	13.1
4	#12950.00	41.8 AV	68.2	-26.4	3.93 V	315	28.7	13.1
5	19425.00	56.5 PK	74.0	-17.5	3.25 V	148	60.3	-3.8
6	19425.00	45.7 AV	54.0	-8.3	3.25 V	148	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.1 PK			1.13 H	30	95.9	7.2
2	*6695.00	92.1 AV			1.13 H	30	84.9	7.2
3	13390.00	49.9 PK	74.0	-24.1	3.81 H	114	35.9	14.0
4	13390.00	37.4 AV	54.0	-16.6	3.81 H	114	23.4	14.0
5	20085.00	55.3 PK	74.0	-18.7	3.46 H	354	58.8	-3.5
6	20085.00	44.5 AV	54.0	-9.5	3.46 H	354	48.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	101.3 PK			1.17 V	312	94.1	7.2
2	*6695.00	91.6 AV			1.17 V	312	84.4	7.2
3	13390.00	53.6 PK	74.0	-20.4	3.89 V	307	39.6	14.0
4	13390.00	41.3 AV	54.0	-12.7	3.89 V	307	27.3	14.0
5	20085.00	56.9 PK	74.0	-17.1	3.26 V	150	60.4	-3.5
6	20085.00	46.0 AV	54.0	-8.0	3.26 V	150	49.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.0 PK			1.12 H	19	93.5	9.5
2	*7115.00	91.9 AV			1.12 H	19	82.4	9.5
3	#7125.00	69.4 PK	88.2	-18.8	1.12 H	19	60.0	9.4
4	#7125.00	45.9 AV	68.2	-22.3	1.12 H	19	36.5	9.4
5	7250.00	55.1 PK	74.0	-18.9	1.12 H	19	46.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.12 H	19	34.7	8.7
7	#14230.00	50.0 PK	88.2	-38.2	3.76 H	104	34.7	15.3
8	#14230.00	37.9 AV	68.2	-30.3	3.76 H	104	22.6	15.3
9	21345.00	55.5 PK	74.0	-18.5	3.51 H	335	57.1	-1.6
10	21345.00	44.3 AV	54.0	-9.7	3.51 H	335	45.9	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.4 PK			1.11 V	312	91.9	9.5
2	*7115.00	91.4 AV			1.11 V	312	81.9	9.5
3	#7125.00	58.3 PK	88.2	-29.9	1.11 V	312	48.9	9.4
4	#7125.00	46.5 AV	68.2	-21.7	1.11 V	312	37.1	9.4
5	7250.00	54.5 PK	74.0	-19.5	1.11 V	312	45.8	8.7
6	7250.00	43.2 AV	54.0	-10.8	1.11 V	312	34.5	8.7
7	#14230.00	54.0 PK	88.2	-34.2	3.88 V	329	38.7	15.3
8	#14230.00	41.9 AV	68.2	-26.3	3.88 V	329	26.6	15.3
9	21345.00	56.9 PK	74.0	-17.1	3.22 V	152	58.5	-1.6
10	21345.00	46.1 AV	54.0	-7.9	3.22 V	152	47.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.7 PK	88.2	-14.5	1.06 H	244	69.4	4.3
2	#5925.00	57.9 AV	68.2	-10.3	1.06 H	244	53.6	4.3
3	*5955.00	117.8 PK			1.06 H	244	113.3	4.5
4	*5955.00	107.0 AV			1.06 H	244	102.5	4.5
5	11910.00	50.4 PK	74.0	-23.6	3.82 H	94	38.2	12.2
6	11910.00	39.2 AV	54.0	-14.8	3.82 H	94	27.0	12.2
7	17865.00	54.8 PK	74.0	-19.2	3.43 H	343	32.9	21.9
8	17865.00	43.9 AV	54.0	-10.1	3.43 H	343	22.0	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.0 PK	88.2	-20.2	3.51 V	345	63.7	4.3
2	#5925.00	53.3 AV	68.2	-14.9	3.51 V	345	49.0	4.3
3	*5955.00	116.5 PK			3.51 V	345	112.0	4.5
4	*5955.00	105.6 AV			3.51 V	345	101.1	4.5
5	11910.00	53.5 PK	74.0	-20.5	3.90 V	311	41.3	12.2
6	11910.00	41.2 AV	54.0	-12.8	3.90 V	311	29.0	12.2
7	17865.00	58.0 PK	74.0	-16.0	3.24 V	166	36.1	21.9
8	17865.00	47.2 AV	54.0	-6.8	3.24 V	166	25.3	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	100.2 PK			1.22 H	342	93.6	6.6
2	*6475.00	89.1 AV			1.22 H	342	82.5	6.6
3	#12950.00	50.8 PK	88.2	-37.4	3.84 H	95	37.7	13.1
4	#12950.00	38.4 AV	68.2	-29.8	3.84 H	95	25.3	13.1
5	19425.00	55.8 PK	74.0	-18.2	3.48 H	327	59.6	-3.8
6	19425.00	44.5 AV	54.0	-9.5	3.48 H	327	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	99.8 PK			1.11 V	283	93.2	6.6
2	*6475.00	88.5 AV			1.11 V	283	81.9	6.6
3	#12950.00	55.0 PK	88.2	-33.2	3.88 V	318	41.9	13.1
4	#12950.00	42.2 AV	68.2	-26.0	3.88 V	318	29.1	13.1
5	19425.00	57.4 PK	74.0	-16.6	3.22 V	159	61.2	-3.8
6	19425.00	46.1 AV	54.0	-7.9	3.22 V	159	49.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	100.6 PK			1.21 H	339	93.4	7.2
2	*6695.00	89.3 AV			1.21 H	339	82.1	7.2
3	13390.00	50.4 PK	74.0	-23.6	3.82 H	86	36.4	14.0
4	13390.00	38.0 AV	54.0	-16.0	3.82 H	86	24.0	14.0
5	20085.00	56.0 PK	74.0	-18.0	3.51 H	336	59.5	-3.5
6	20085.00	44.4 AV	54.0	-9.6	3.51 H	336	47.9	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	99.7 PK			1.07 V	271	92.5	7.2
2	*6695.00	88.5 AV			1.07 V	271	81.3	7.2
3	13390.00	55.1 PK	74.0	-18.9	3.86 V	308	41.1	14.0
4	13390.00	42.0 AV	54.0	-12.0	3.86 V	308	28.0	14.0
5	20085.00	57.9 PK	74.0	-16.1	3.19 V	169	61.4	-3.5
6	20085.00	46.3 AV	54.0	-7.7	3.19 V	169	49.8	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.6 PK			1.19 H	347	90.1	9.5
2	*7115.00	88.7 AV			1.19 H	347	79.2	9.5
3	#7125.00	85.8 PK	88.2	-2.4	1.19 H	347	76.4	9.4
4	#7125.00	55.2 AV	68.2	-13.0	1.19 H	347	45.8	9.4
5	7250.00	54.9 PK	74.0	-19.1	1.19 H	347	46.2	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.19 H	347	34.8	8.7
7	#14230.00	50.6 PK	88.2	-37.6	3.85 H	99	35.3	15.3
8	#14230.00	38.1 AV	68.2	-30.1	3.85 H	99	22.8	15.3
9	21345.00	55.8 PK	74.0	-18.2	3.49 H	313	57.4	-1.6
10	21345.00	44.6 AV	54.0	-9.4	3.49 H	313	46.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.1 PK			1.14 V	297	90.6	9.5
2	*7115.00	88.8 AV			1.14 V	297	79.3	9.5
3	#7125.00	86.3 PK	88.2	-1.9	1.14 V	297	76.9	9.4
4	#7125.00	55.5 AV	68.2	-12.7	1.14 V	297	46.1	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.14 V	297	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.14 V	297	34.8	8.7
7	#14230.00	54.5 PK	88.2	-33.7	3.88 V	320	39.2	15.3
8	#14230.00	41.9 AV	68.2	-26.3	3.88 V	320	26.6	15.3
9	21345.00	57.3 PK	74.0	-16.7	3.23 V	146	58.9	-1.6
10	21345.00	46.3 AV	54.0	-7.7	3.23 V	146	47.9	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	1.07 H	245	74.9	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.07 H	245	62.3	4.3
3	*5985.00	110.4 PK			1.07 H	245	106.0	4.4
4	*5985.00	98.1 AV			1.07 H	245	93.7	4.4
5	11970.00	50.3 PK	74.0	-23.7	3.62 H	102	38.1	12.2
6	11970.00	39.4 AV	54.0	-14.6	3.62 H	102	27.2	12.2
7	17955.00	55.7 PK	74.0	-18.3	3.69 H	309	32.3	23.4
8	17955.00	43.8 AV	54.0	-10.2	3.69 H	309	20.4	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.6 PK	88.2	-14.6	3.32 V	337	69.3	4.3
2	#5925.00	59.6 AV	68.2	-8.6	3.32 V	337	55.3	4.3
3	*5985.00	106.1 PK			3.32 V	337	101.7	4.4
4	*5985.00	95.1 AV			3.32 V	337	90.7	4.4
5	11970.00	53.2 PK	74.0	-20.8	3.90 V	311	41.0	12.2
6	11970.00	41.2 AV	54.0	-12.8	3.90 V	311	29.0	12.2
7	17955.00	57.4 PK	74.0	-16.6	3.19 V	186	34.0	23.4
8	17955.00	46.3 AV	54.0	-7.7	3.19 V	186	22.9	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.5 PK			1.06 H	32	97.0	6.5
2	*6465.00	90.9 AV			1.06 H	32	84.4	6.5
3	#12930.00	51.5 PK	88.2	-36.7	3.82 H	123	38.4	13.1
4	#12930.00	38.9 AV	68.2	-29.3	3.82 H	123	25.8	13.1
5	19395.00	55.6 PK	74.0	-18.4	3.55 H	344	59.3	-3.7
6	19395.00	44.0 AV	54.0	-10.0	3.55 H	344	47.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	103.1 PK			1.15 V	286	96.6	6.5
2	*6465.00	90.4 AV			1.15 V	286	83.9	6.5
3	#12930.00	53.5 PK	88.2	-34.7	3.96 V	305	40.4	13.1
4	#12930.00	41.2 AV	68.2	-27.0	3.96 V	305	28.1	13.1
5	19395.00	57.0 PK	74.0	-17.0	3.20 V	153	60.7	-3.7
6	19395.00	46.5 AV	54.0	-7.5	3.20 V	153	50.2	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.9 PK			1.06 H	30	96.7	7.2
2	*6705.00	91.1 AV			1.06 H	30	83.9	7.2
3	#13410.00	52.0 PK	88.2	-36.2	3.86 H	114	37.8	14.2
4	#13410.00	39.3 AV	68.2	-28.9	3.86 H	114	25.1	14.2
5	20115.00	55.5 PK	74.0	-18.5	3.50 H	338	59.0	-3.5
6	20115.00	43.8 AV	54.0	-10.2	3.50 H	338	47.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	103.0 PK			1.20 V	299	95.8	7.2
2	*6705.00	90.5 AV			1.20 V	299	83.3	7.2
3	#13410.00	53.8 PK	88.2	-34.4	3.97 V	306	39.6	14.2
4	#13410.00	41.6 AV	68.2	-26.6	3.97 V	306	27.4	14.2
5	20115.00	56.9 PK	74.0	-17.1	3.17 V	145	60.4	-3.5
6	20115.00	46.4 AV	54.0	-7.6	3.17 V	145	49.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.4 PK			1.06 H	25	95.0	8.4
2	*7025.00	90.7 AV			1.06 H	25	82.3	8.4
3	#7125.00	59.5 PK	88.2	-28.7	1.06 H	25	50.1	9.4
4	#7125.00	46.1 AV	68.2	-22.1	1.06 H	25	36.7	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.06 H	25	46.7	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.06 H	25	34.7	8.7
7	#14050.00	51.1 PK	88.2	-37.1	3.83 H	126	35.6	15.5
8	#14050.00	38.6 AV	68.2	-29.6	3.83 H	126	23.1	15.5
9	21075.00	55.5 PK	74.0	-18.5	3.54 H	336	57.7	-2.2
10	21075.00	44.2 AV	54.0	-9.8	3.54 H	336	46.4	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	103.1 PK			1.10 V	297	94.7	8.4
2	*7025.00	90.6 AV			1.10 V	297	82.2	8.4
3	#7125.00	59.1 PK	88.2	-29.1	1.10 V	297	49.7	9.4
4	#7125.00	46.6 AV	68.2	-21.6	1.10 V	297	37.2	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.10 V	297	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.10 V	297	34.8	8.7
7	#14050.00	54.0 PK	88.2	-34.2	3.91 V	315	38.5	15.5
8	#14050.00	41.6 AV	68.2	-26.6	3.91 V	315	26.1	15.5
9	21075.00	57.5 PK	74.0	-16.5	3.21 V	155	59.7	-2.2
10	21075.00	46.8 AV	54.0	-7.2	3.21 V	155	49.0	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	77.2 PK	88.2	-11.0	3.61 H	89	72.9	4.3
2	#5925.00	62.5 AV	68.2	-5.7	3.61 H	89	58.2	4.3
3	*6025.00	107.3 PK			3.61 H	89	103.1	4.2
4	*6025.00	94.9 AV			3.61 H	89	90.7	4.2
5	12050.00	50.8 PK	74.0	-23.2	3.80 H	105	38.4	12.4
6	12050.00	38.8 AV	54.0	-15.2	3.80 H	105	26.4	12.4
7	18075.00	56.1 PK	74.0	-17.9	3.50 H	323	60.8	-4.7
8	18075.00	44.8 AV	54.0	-9.2	3.50 H	323	49.5	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.8 PK	88.2	-16.4	3.47 V	340	67.5	4.3
2	#5925.00	56.1 AV	68.2	-12.1	3.47 V	340	51.8	4.3
3	*6025.00	103.7 PK			3.47 V	340	99.5	4.2
4	*6025.00	92.0 AV			3.47 V	340	87.8	4.2
5	12050.00	53.9 PK	74.0	-20.1	3.88 V	327	41.5	12.4
6	12050.00	41.5 AV	54.0	-12.5	3.88 V	327	29.1	12.4
7	18075.00	58.4 PK	74.0	-15.6	3.20 V	172	63.1	-4.7
8	18075.00	47.3 AV	54.0	-6.7	3.20 V	172	52.0	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.0 PK			1.17 H	12	96.2	6.8
2	*6505.00	90.9 AV			1.17 H	12	84.1	6.8
3	#13010.00	51.2 PK	88.2	-37.0	3.75 H	110	38.0	13.2
4	#13010.00	38.4 AV	68.2	-29.8	3.75 H	110	25.2	13.2
5	19515.00	55.6 PK	74.0	-18.4	3.60 H	351	59.7	-4.1
6	19515.00	44.3 AV	54.0	-9.7	3.60 H	351	48.4	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.0 PK			2.93 V	100	96.2	6.8
2	*6505.00	90.7 AV			2.93 V	100	83.9	6.8
3	#13010.00	54.0 PK	88.2	-34.2	3.82 V	294	40.8	13.2
4	#13010.00	41.6 AV	68.2	-26.6	3.82 V	294	28.4	13.2
5	19515.00	57.9 PK	74.0	-16.1	3.16 V	140	62.0	-4.1
6	19515.00	46.8 AV	54.0	-7.2	3.16 V	140	50.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.5 PK			1.17 H	1	96.3	7.2
2	*6665.00	91.3 AV			1.17 H	1	84.1	7.2
3	13330.00	51.1 PK	74.0	-22.9	3.80 H	116	37.3	13.8
4	13330.00	38.4 AV	54.0	-15.6	3.80 H	116	24.6	13.8
5	19995.00	55.7 PK	74.0	-18.3	3.56 H	338	59.3	-3.6
6	19995.00	44.1 AV	54.0	-9.9	3.56 H	338	47.7	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.9 PK			2.94 V	96	95.7	7.2
2	*6665.00	90.5 AV			2.94 V	96	83.3	7.2
3	13330.00	53.9 PK	74.0	-20.1	3.81 V	290	40.1	13.8
4	13330.00	41.6 AV	54.0	-12.4	3.81 V	290	27.8	13.8
5	19995.00	57.8 PK	74.0	-16.2	3.17 V	148	61.4	-3.6
6	19995.00	46.5 AV	54.0	-7.5	3.17 V	148	50.1	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.5 PK			1.17 H	18	95.7	7.8
2	*6985.00	91.3 AV			1.17 H	18	83.5	7.8
3	#7125.00	74.0 PK	88.2	-14.2	1.17 H	18	64.6	9.4
4	#7125.00	55.7 AV	68.2	-12.5	1.17 H	18	46.3	9.4
5	7250.00	57.5 PK	74.0	-16.5	1.17 H	18	48.8	8.7
6	7250.00	45.3 AV	54.0	-8.7	1.17 H	18	36.6	8.7
7	#13970.00	51.3 PK	88.2	-36.9	3.78 H	122	35.8	15.5
8	#13970.00	38.6 AV	68.2	-29.6	3.78 H	122	23.1	15.5
9	20955.00	55.6 PK	74.0	-18.4	3.55 H	348	58.3	-2.7
10	20955.00	44.1 AV	54.0	-9.9	3.55 H	348	46.8	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.4 PK			2.98 V	111	95.6	7.8
2	*6985.00	90.8 AV			2.98 V	111	83.0	7.8
3	#7125.00	73.2 PK	88.2	-15.0	2.98 V	111	63.8	9.4
4	#7125.00	55.2 AV	68.2	-13.0	2.98 V	111	45.8	9.4
5	7250.00	58.0 PK	74.0	-16.0	2.98 V	111	49.3	8.7
6	7250.00	44.7 AV	54.0	-9.3	2.98 V	111	36.0	8.7
7	#13970.00	54.0 PK	88.2	-34.2	3.82 V	309	38.5	15.5
8	#13970.00	41.6 AV	68.2	-26.6	3.82 V	309	26.1	15.5
9	20955.00	57.7 PK	74.0	-16.3	3.13 V	148	60.4	-2.7
10	20955.00	46.7 AV	54.0	-7.3	3.13 V	148	49.4	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	81.2 PK	88.2	-7.0	3.61 H	91	76.9	4.3
2	#5925.00	64.7 AV	68.2	-3.5	3.61 H	91	60.4	4.3
3	*6025.00	106.3 PK			3.61 H	91	102.1	4.2
4	*6025.00	94.7 AV			3.61 H	91	90.5	4.2
5	12050.00	50.7 PK	74.0	-23.3	3.83 H	115	38.3	12.4
6	12050.00	38.3 AV	54.0	-15.7	3.83 H	115	25.9	12.4
7	18075.00	56.0 PK	74.0	-18.0	3.60 H	332	60.7	-4.7
8	18075.00	44.6 AV	54.0	-9.4	3.60 H	332	49.3	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.1 PK	88.2	-15.1	3.48 V	342	68.8	4.3
2	#5925.00	58.0 AV	68.2	-10.2	3.48 V	342	53.7	4.3
3	*6025.00	103.0 PK			3.48 V	342	98.8	4.2
4	*6025.00	91.2 AV			3.48 V	342	87.0	4.2
5	12050.00	53.3 PK	74.0	-20.7	3.92 V	314	40.9	12.4
6	12050.00	41.2 AV	54.0	-12.8	3.92 V	314	28.8	12.4
7	18075.00	58.2 PK	74.0	-15.8	3.21 V	171	62.9	-4.7
8	18075.00	47.2 AV	54.0	-6.8	3.21 V	171	51.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	103.4 PK			1.08 H	20	96.6	6.8
2	*6505.00	91.0 AV			1.08 H	20	84.2	6.8
3	#13010.00	51.4 PK	88.2	-36.8	3.90 H	131	38.2	13.2
4	#13010.00	38.6 AV	68.2	-29.6	3.90 H	131	25.4	13.2
5	19515.00	55.8 PK	74.0	-18.2	3.50 H	329	59.9	-4.1
6	19515.00	44.5 AV	54.0	-9.5	3.50 H	329	48.6	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	101.6 PK			1.22 V	290	94.8	6.8
2	*6505.00	89.7 AV			1.22 V	290	82.9	6.8
3	#13010.00	53.8 PK	88.2	-34.4	3.83 V	294	40.6	13.2
4	#13010.00	41.6 AV	68.2	-26.6	3.83 V	294	28.4	13.2
5	19515.00	57.1 PK	74.0	-16.9	3.21 V	164	61.2	-4.1
6	19515.00	46.6 AV	54.0	-7.4	3.21 V	164	50.7	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	103.3 PK			1.13 H	16	96.1	7.2
2	*6665.00	91.0 AV			1.13 H	16	83.8	7.2
3	13330.00	51.4 PK	74.0	-22.6	3.91 H	137	37.6	13.8
4	13330.00	38.6 AV	54.0	-15.4	3.91 H	137	24.8	13.8
5	19995.00	56.0 PK	74.0	-18.0	3.53 H	333	59.6	-3.6
6	19995.00	44.9 AV	54.0	-9.1	3.53 H	333	48.5	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	101.8 PK			1.24 V	295	94.6	7.2
2	*6665.00	90.0 AV			1.24 V	295	82.8	7.2
3	13330.00	54.4 PK	74.0	-19.6	3.87 V	279	40.6	13.8
4	13330.00	41.9 AV	54.0	-12.1	3.87 V	279	28.1	13.8
5	19995.00	56.8 PK	74.0	-17.2	3.15 V	164	60.4	-3.6
6	19995.00	46.2 AV	54.0	-7.8	3.15 V	164	49.8	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 69% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.4 PK			1.12 H	29	95.6	7.8
2	*6985.00	91.0 AV			1.12 H	29	83.2	7.8
3	#7125.00	75.2 PK	88.2	-13.0	1.12 H	29	65.8	9.4
4	#7125.00	60.7 AV	68.2	-7.5	1.12 H	29	51.3	9.4
5	7250.00	59.3 PK	74.0	-14.7	1.12 H	29	50.6	8.7
6	7250.00	45.9 AV	54.0	-8.1	1.12 H	29	37.2	8.7
7	#13970.00	51.4 PK	88.2	-36.8	3.88 H	128	35.9	15.5
8	#13970.00	38.8 AV	68.2	-29.4	3.88 H	128	23.3	15.5
9	20955.00	55.9 PK	74.0	-18.1	3.52 H	331	58.6	-2.7
10	20955.00	44.6 AV	54.0	-9.4	3.52 H	331	47.3	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	101.5 PK			1.24 V	286	93.7	7.8
2	*6985.00	89.8 AV			1.24 V	286	82.0	7.8
3	#7125.00	72.5 PK	88.2	-15.7	1.24 V	286	63.1	9.4
4	#7125.00	58.1 AV	68.2	-10.1	1.24 V	286	48.7	9.4
5	7250.00	58.3 PK	74.0	-15.7	1.24 V	286	49.6	8.7
6	7250.00	45.0 AV	54.0	-9.0	1.24 V	286	36.3	8.7
7	#13970.00	53.6 PK	88.2	-34.6	3.84 V	306	38.1	15.5
8	#13970.00	41.2 AV	68.2	-27.0	3.84 V	306	25.7	15.5
9	20955.00	57.0 PK	74.0	-17.0	3.15 V	163	59.7	-2.7
10	20955.00	46.4 AV	54.0	-7.6	3.15 V	163	49.1	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode B

1Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

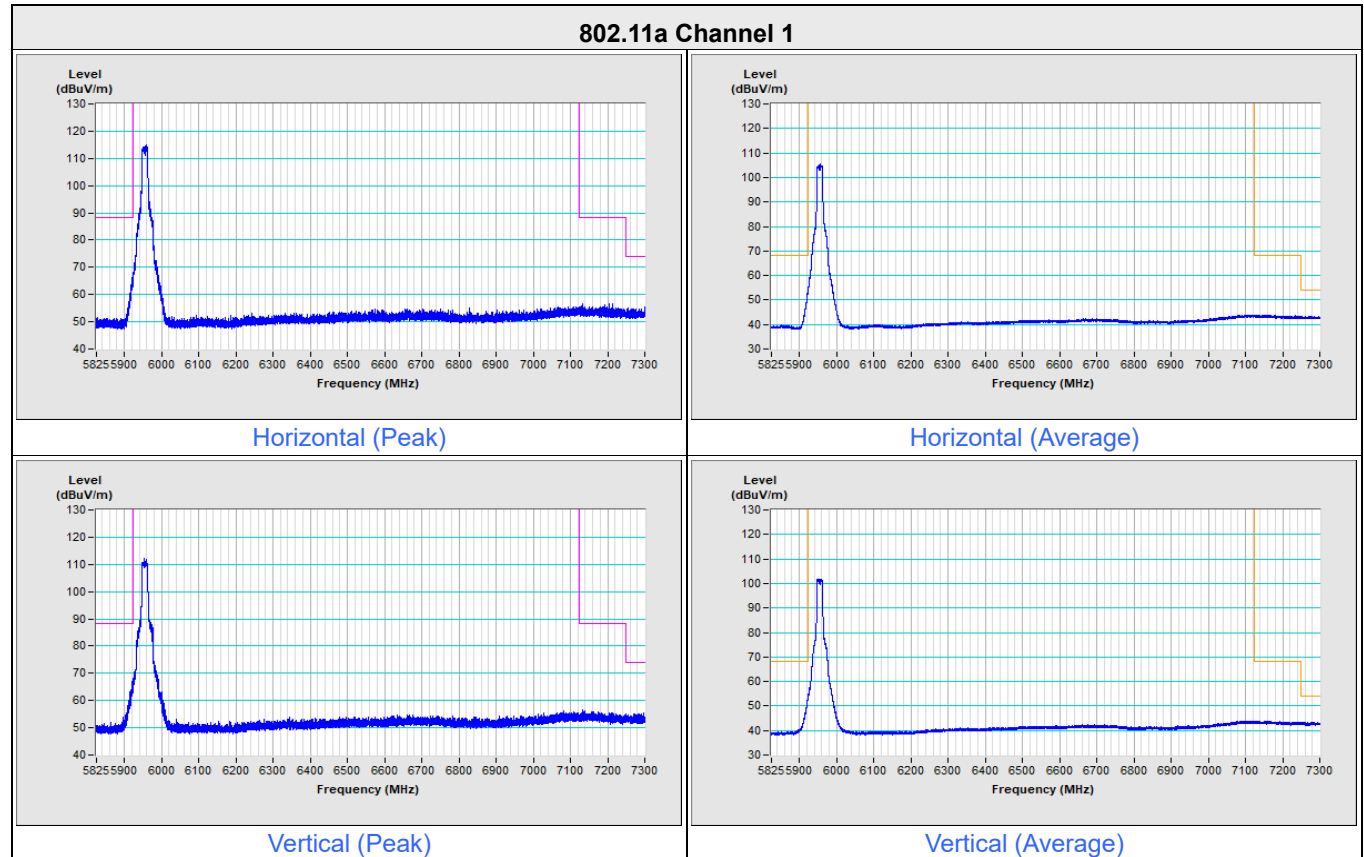


802.11a Channel 233

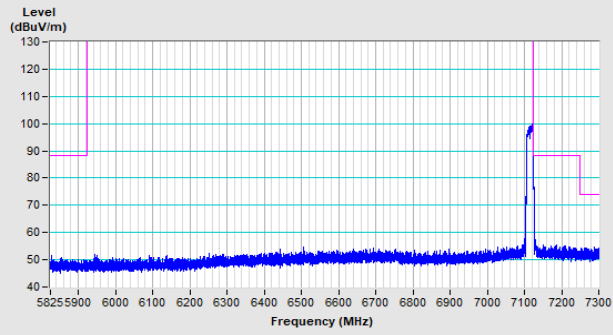


Horizontal (Peak)

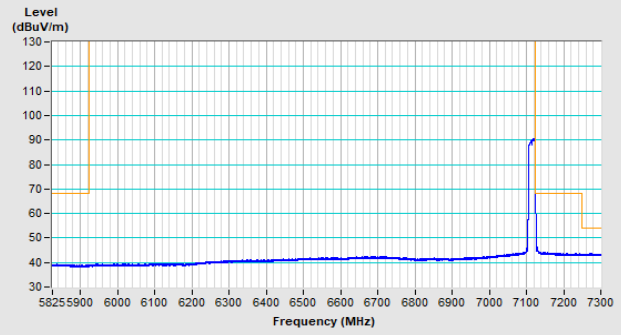

Horizontal (Average)

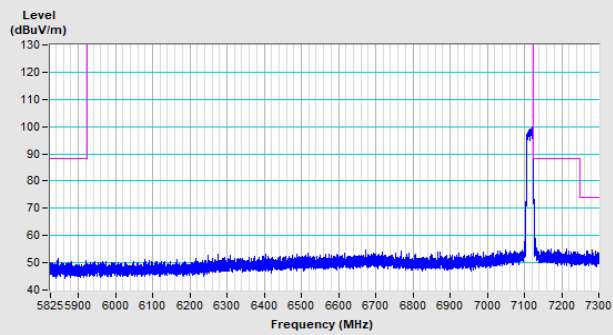

Vertical (Peak)

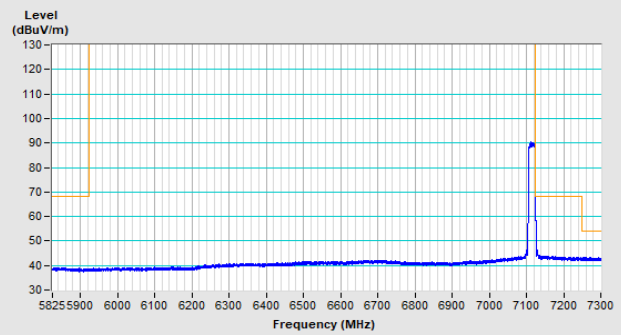


Vertical (Average)


1Tx NSS1

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 1

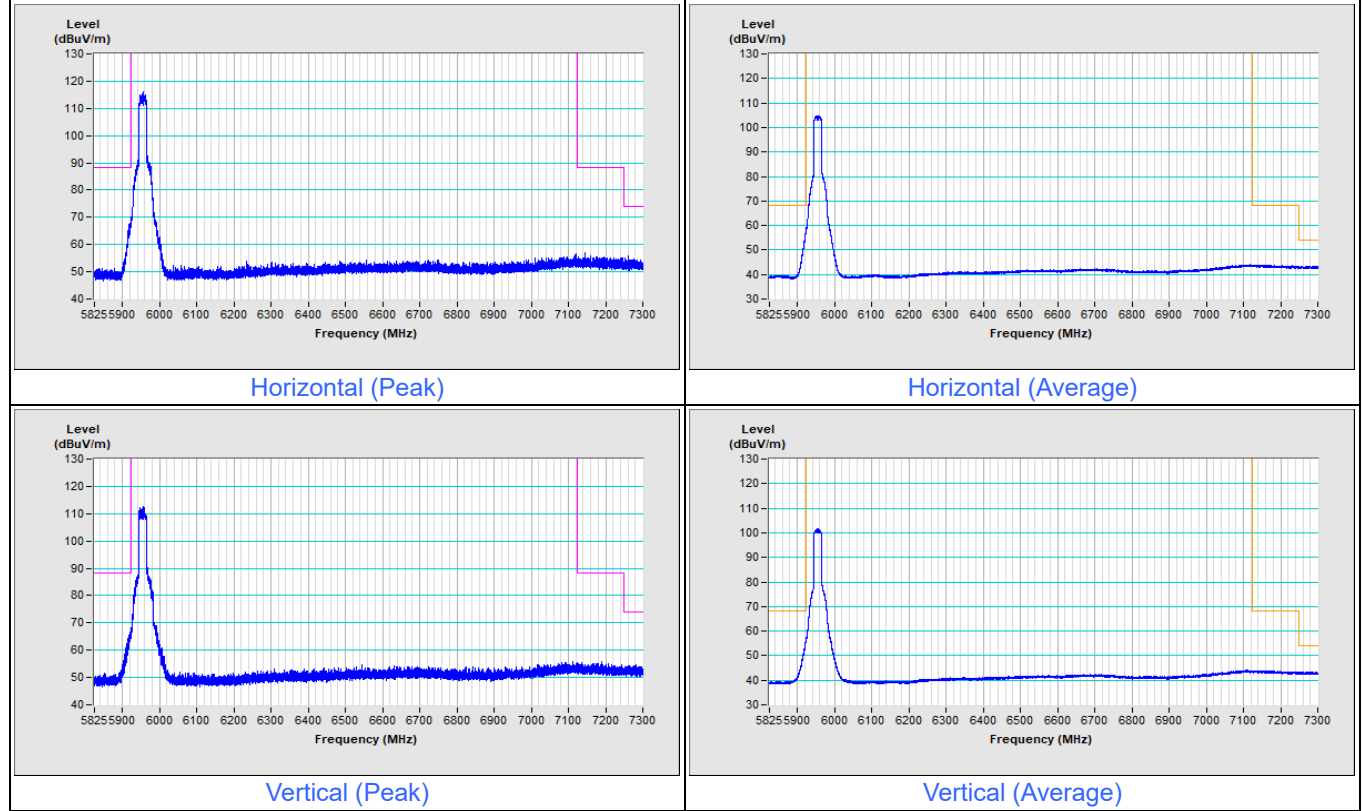

802.11be (EHT20) Channel 233

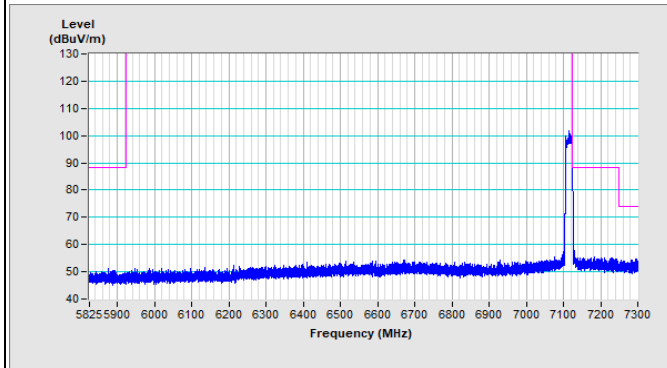

Horizontal (Peak)

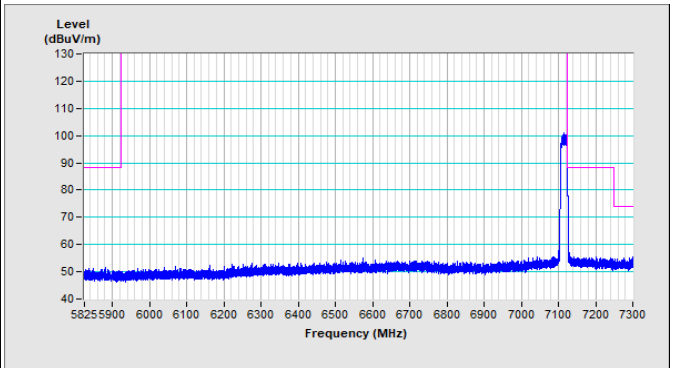

Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233




Horizontal (Average)




Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

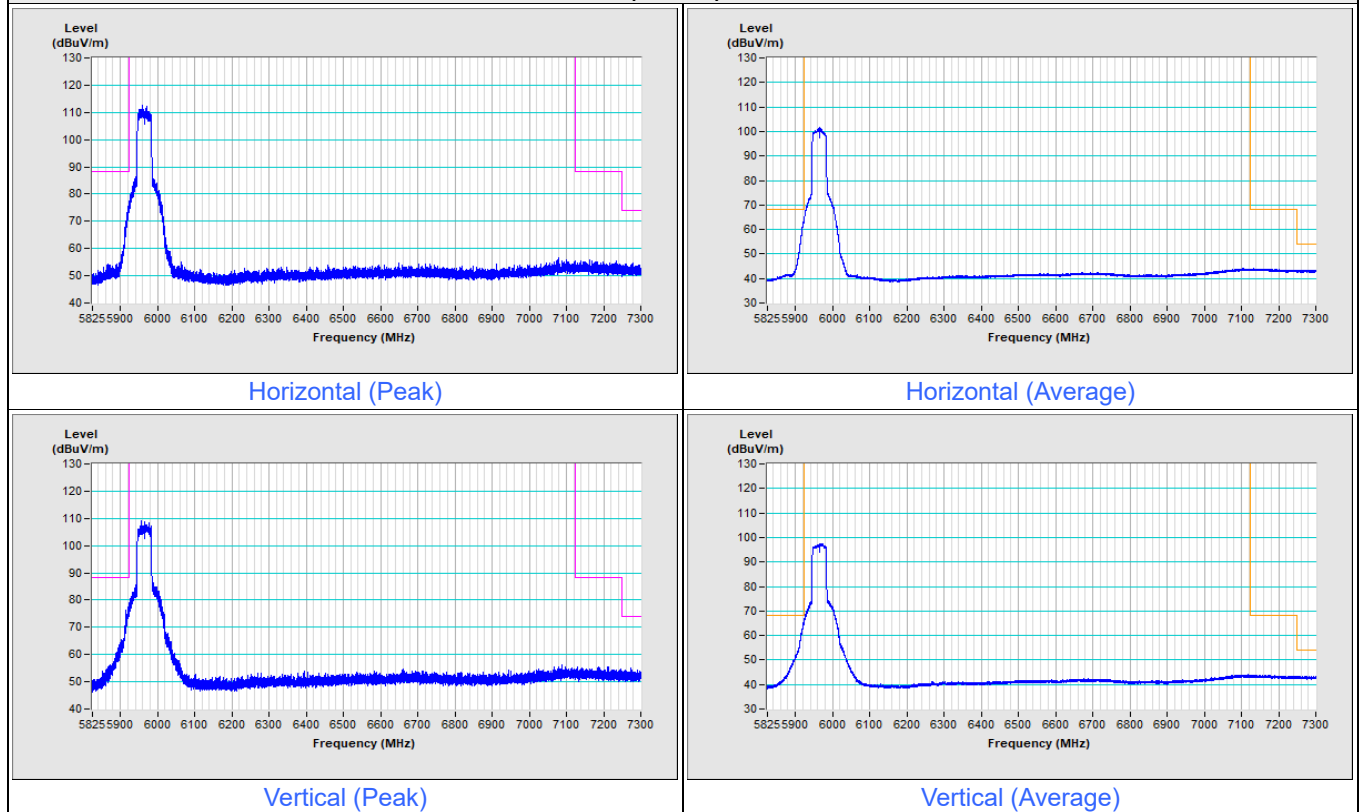


802.11be (EHT40) Channel 227

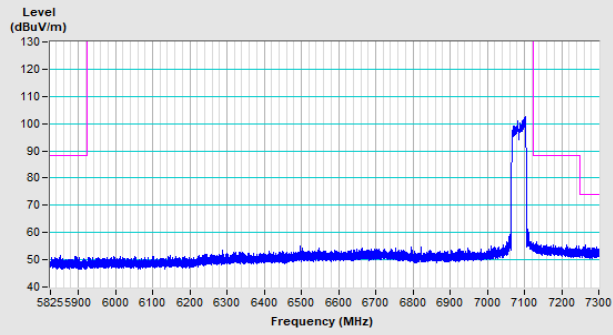


Horizontal (Peak)

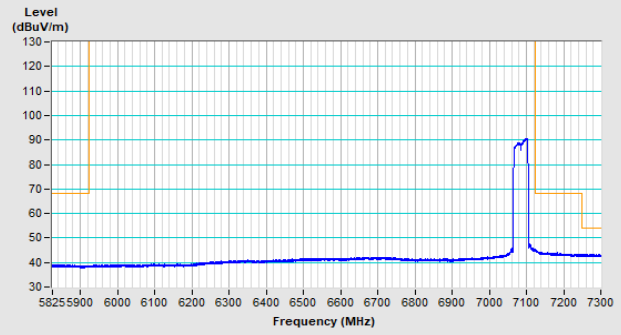

Horizontal (Average)

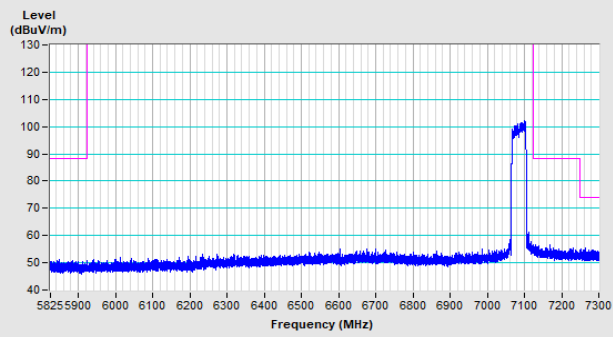


Vertical (Peak)

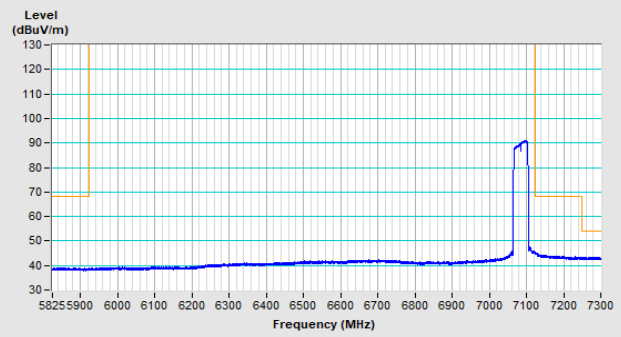


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

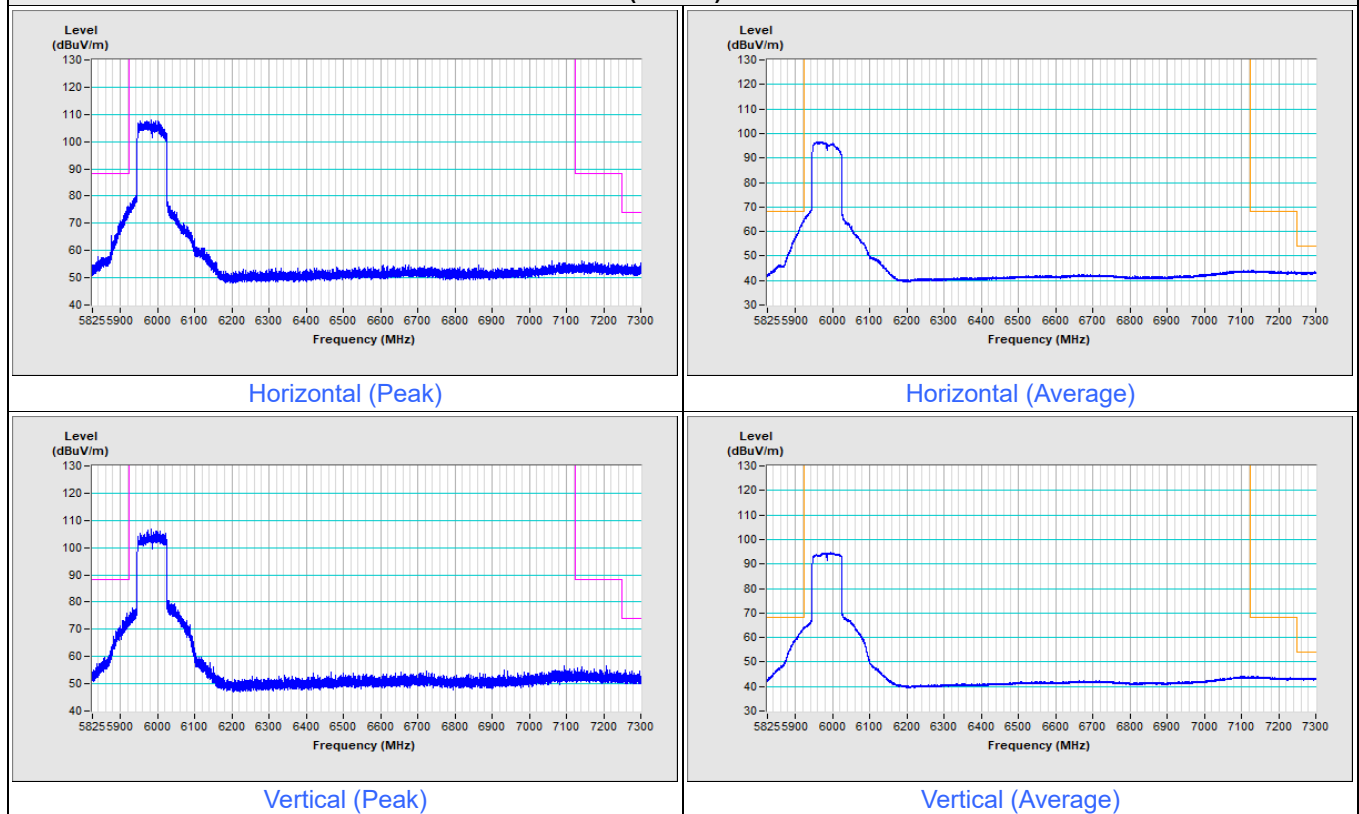


802.11be (EHT80) Channel 215

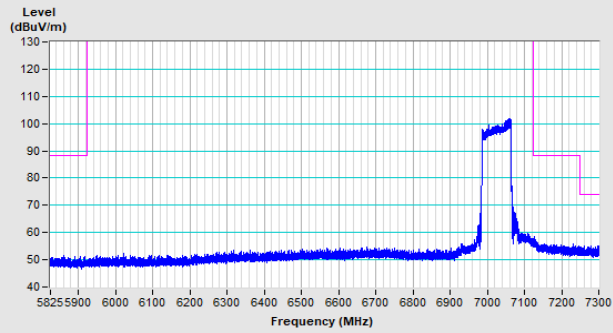


Horizontal (Peak)

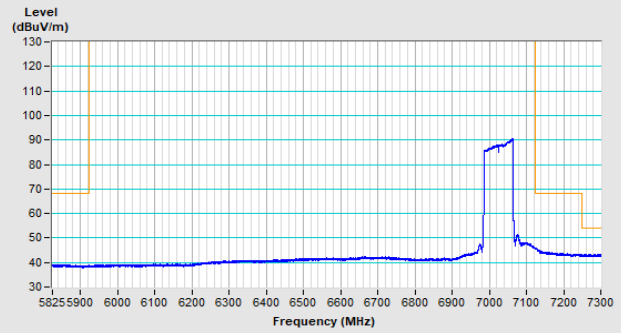

Horizontal (Average)

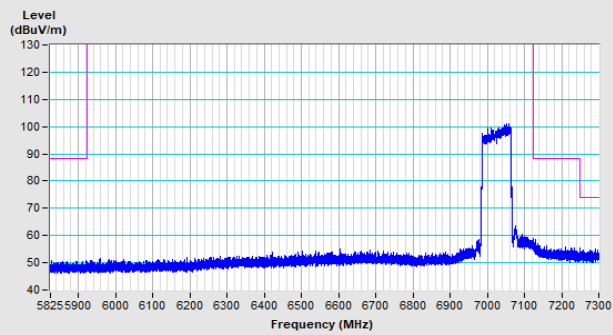


Vertical (Peak)

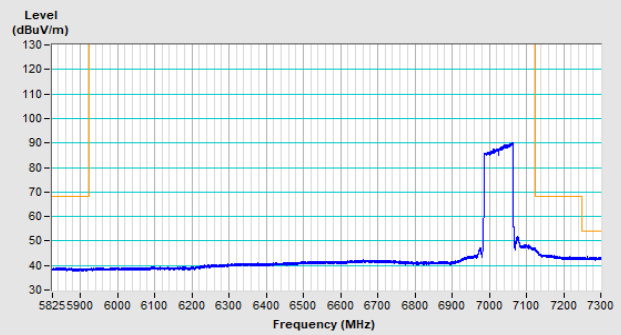


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

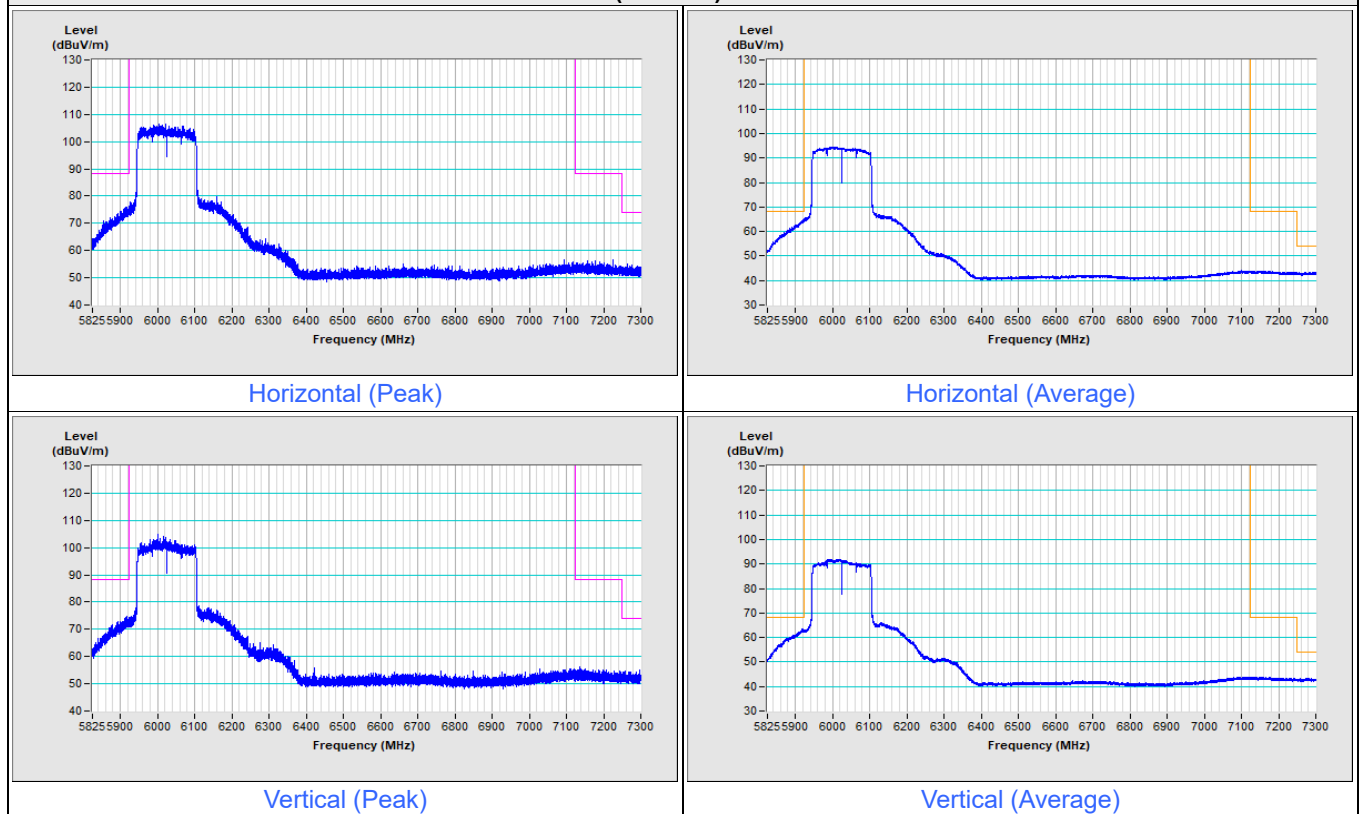


802.11be (EHT160) Channel 207

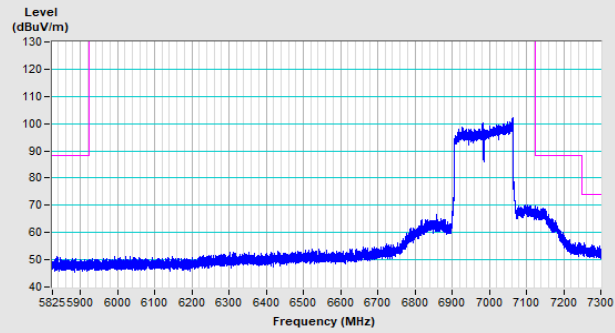


Horizontal (Peak)

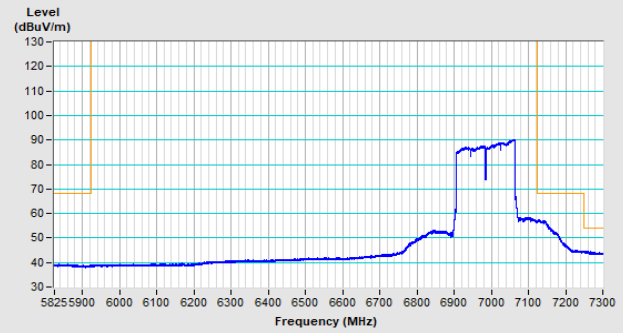

Horizontal (Average)

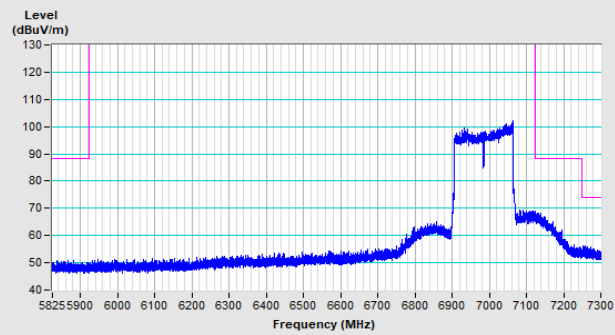


Vertical (Peak)

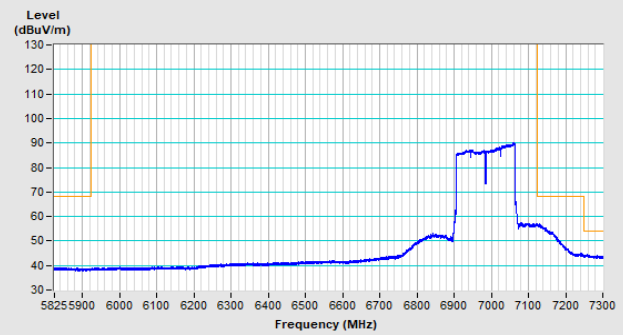


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

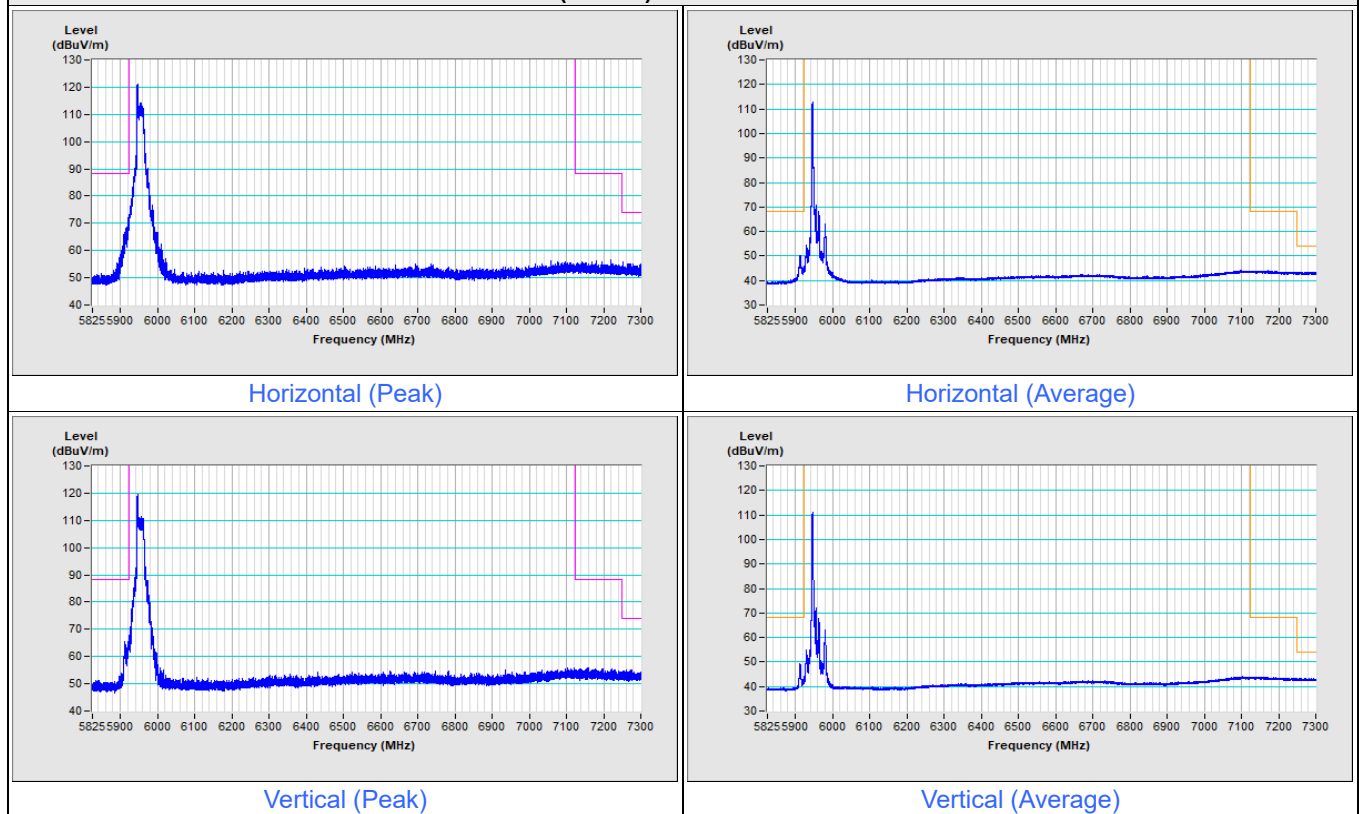

802.11be (EHT20) 26-tone RU Channel 233

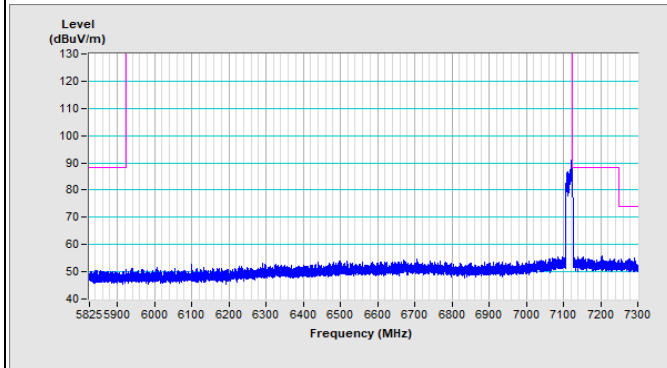

Horizontal (Peak)

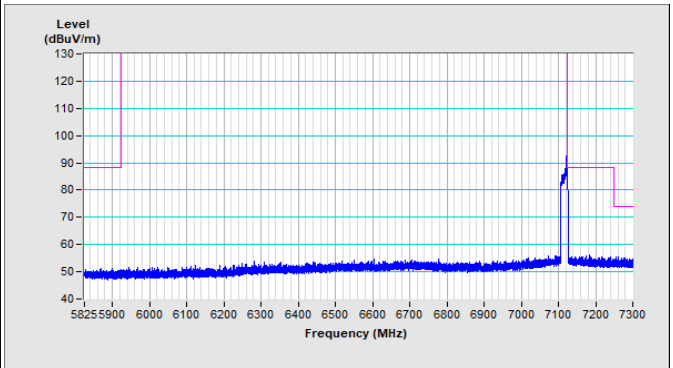

Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233



Horizontal (Average)



Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 1

