



802.11be (EHT20) 106-tone RU Channel 233

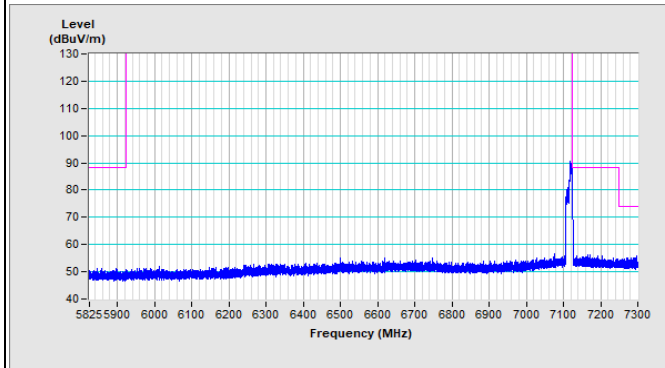


Horizontal (Peak)

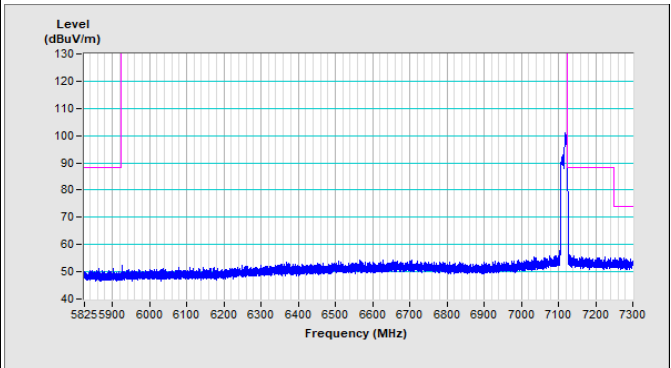


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106-tone RU Channel 233

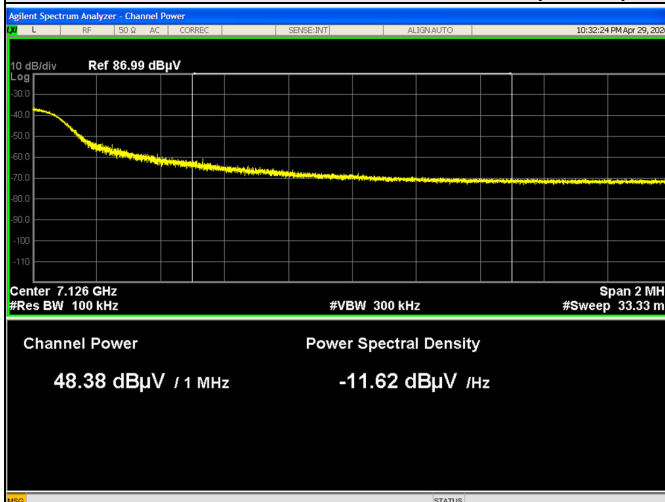


Horizontal (Average)

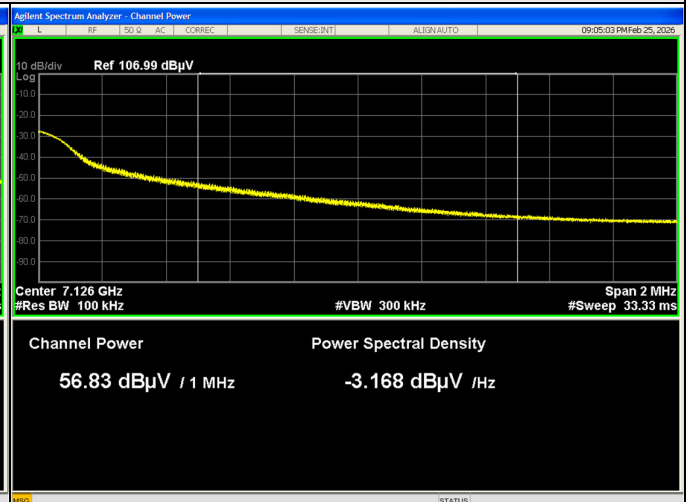


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

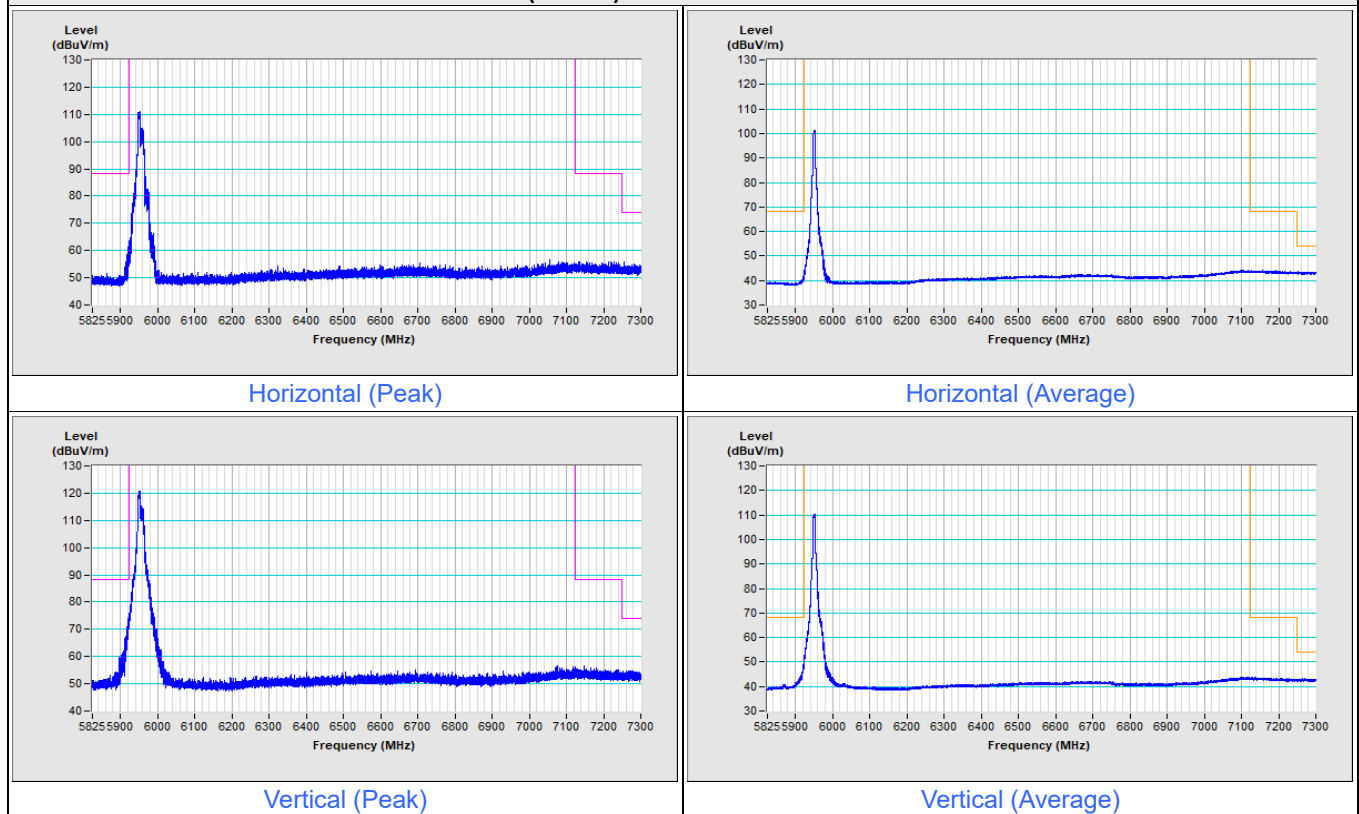


802.11be (EHT20) 52+26-tone MRU Channel 233

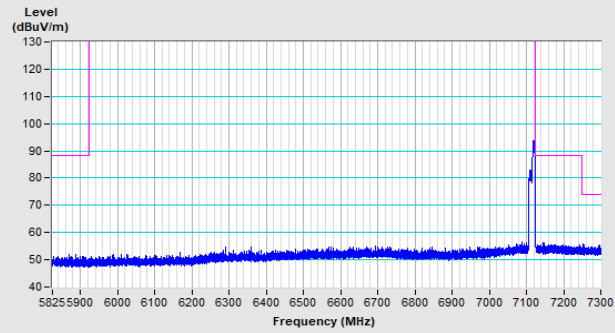


Horizontal (Peak)

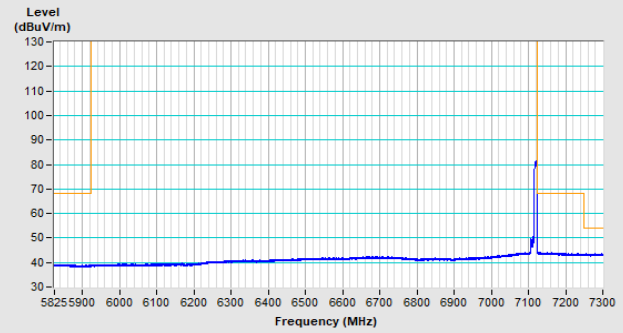

Horizontal (Average)

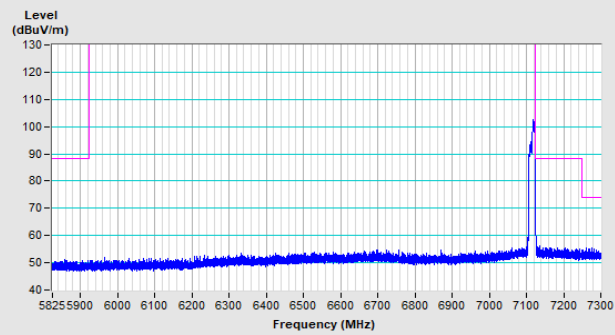


Vertical (Peak)

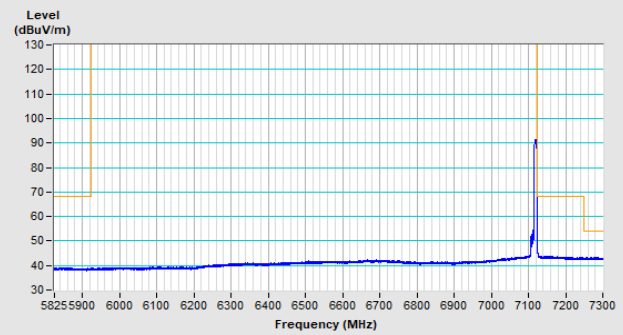


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

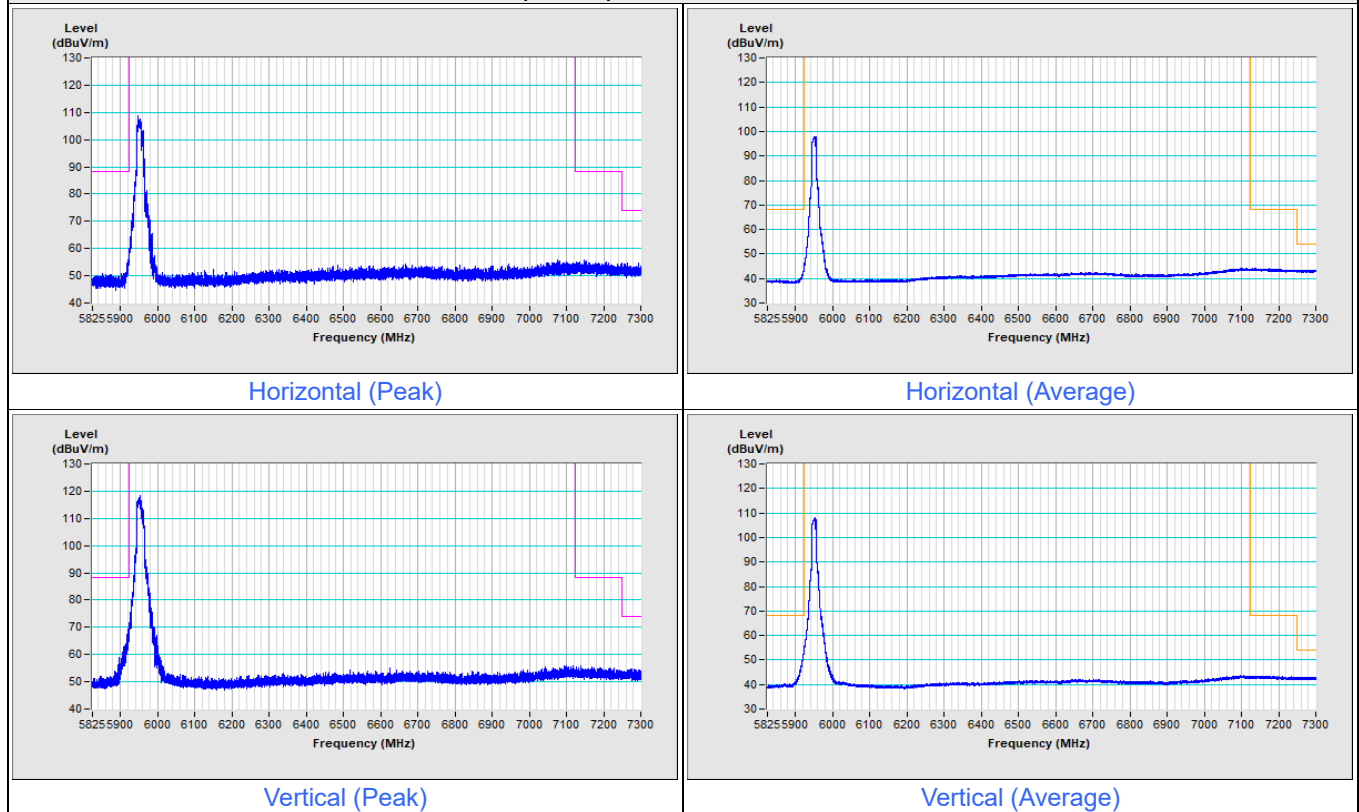

802.11be (EHT20) 106+26-tone MRU Channel 233

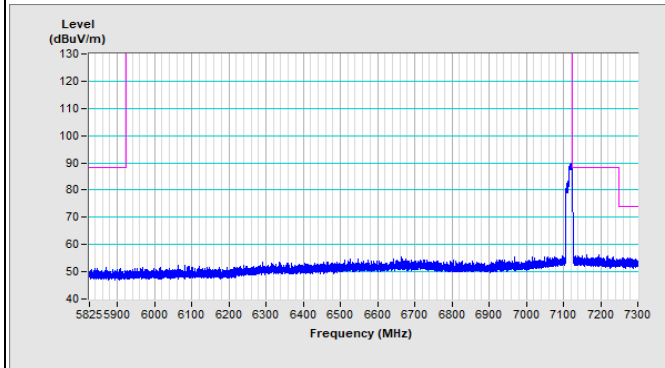


Horizontal (Peak)

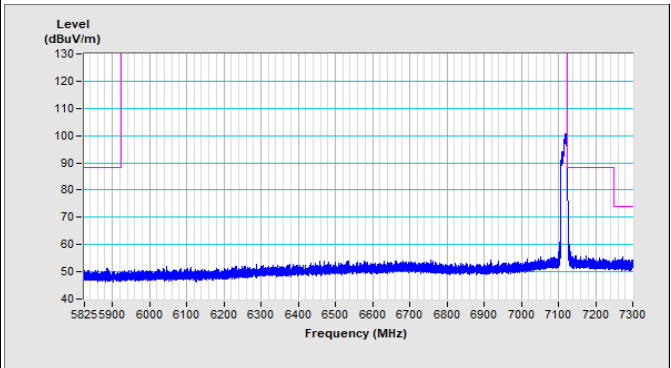


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233

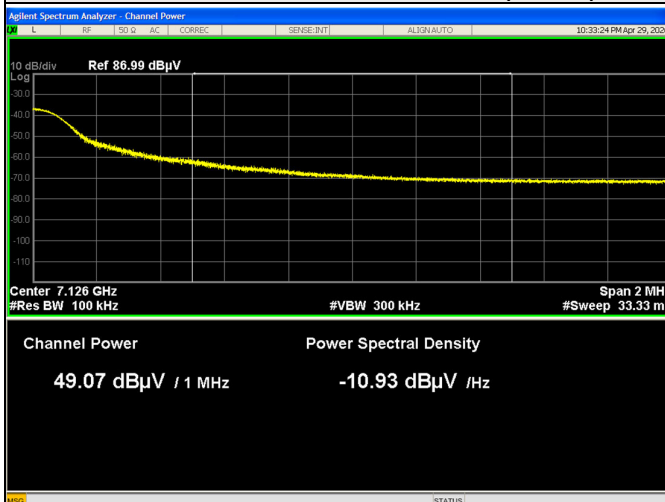


Horizontal (Average)

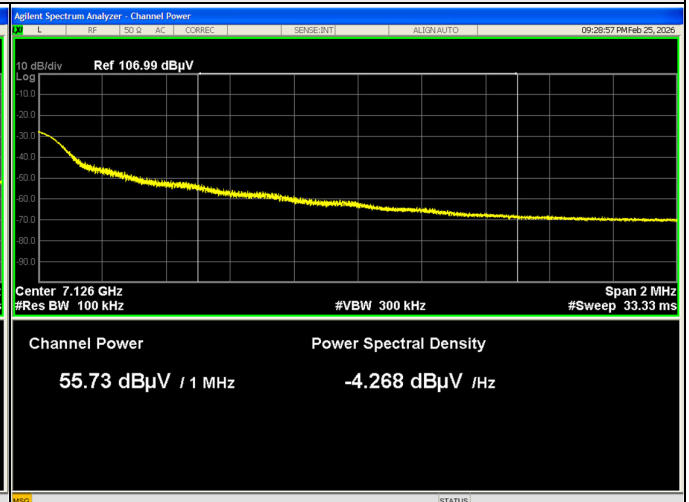


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

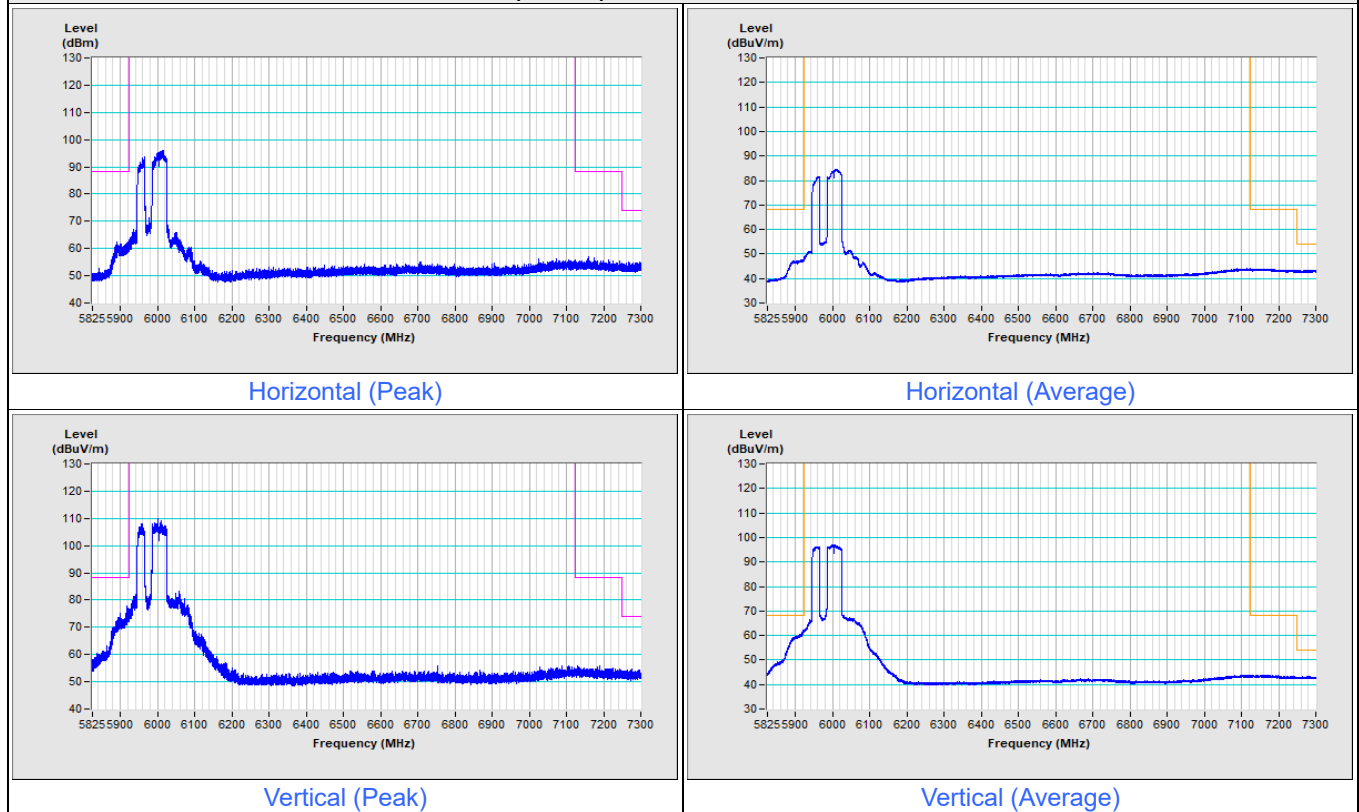


802.11be (EHT80) 484+242-tone MRU Channel 215

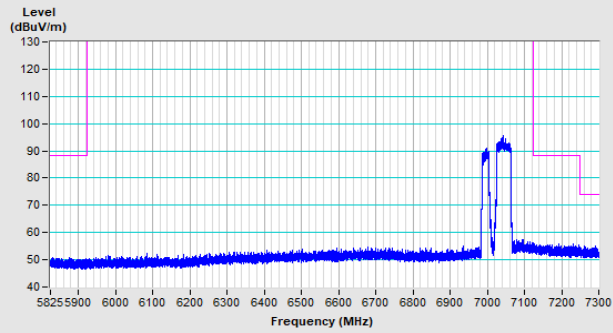


Horizontal (Peak)

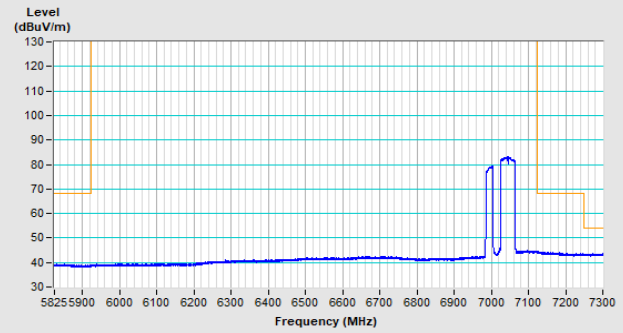

Horizontal (Average)

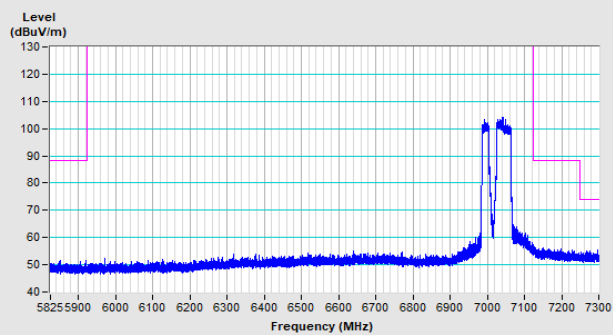


Vertical (Peak)

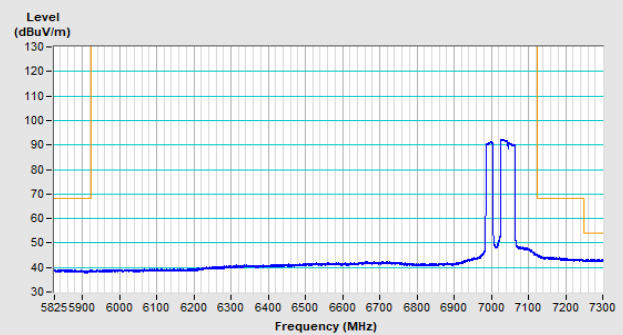


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

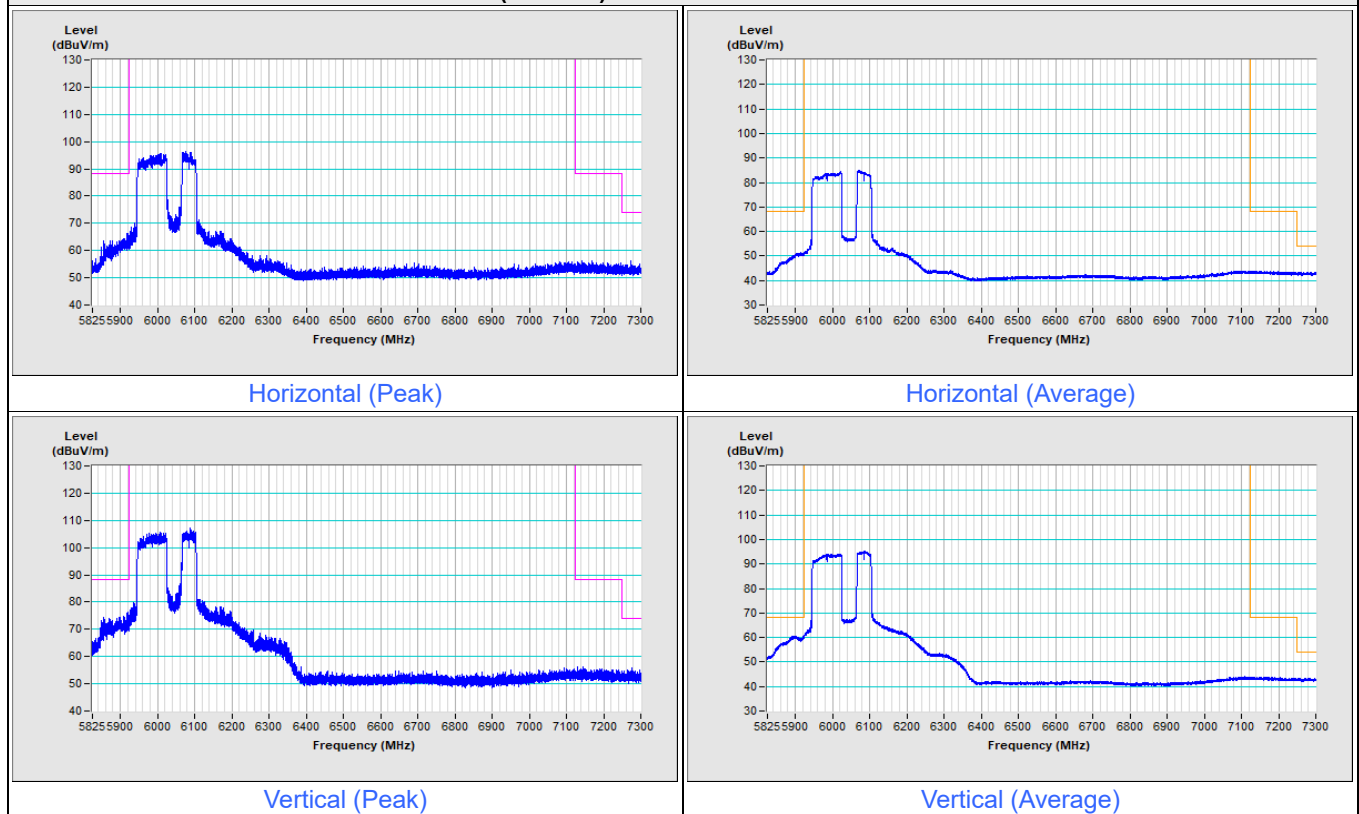


802.11be (EHT160) 996+484-tone MRU Channel 207

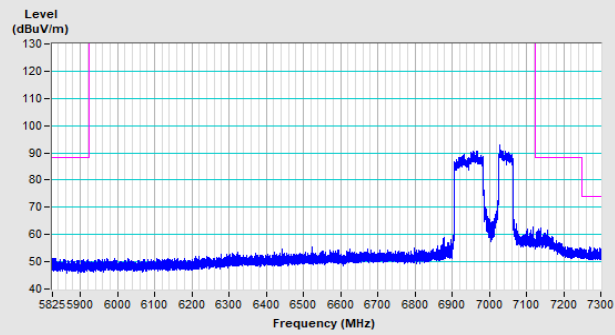


Horizontal (Peak)

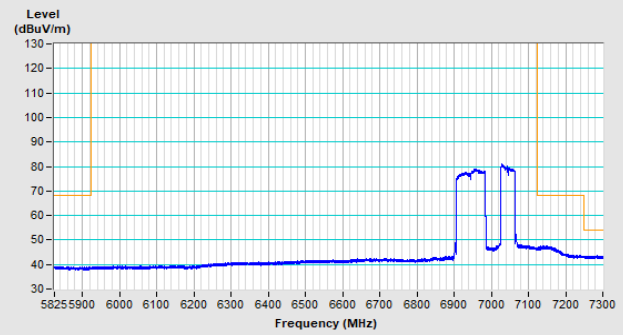

Horizontal (Average)

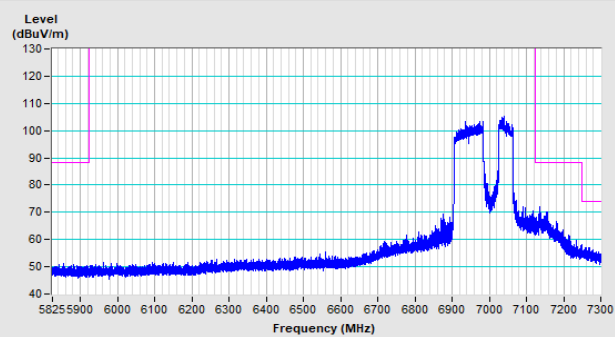


Vertical (Peak)

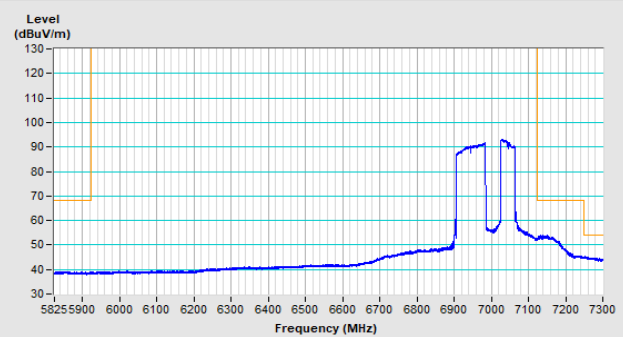


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

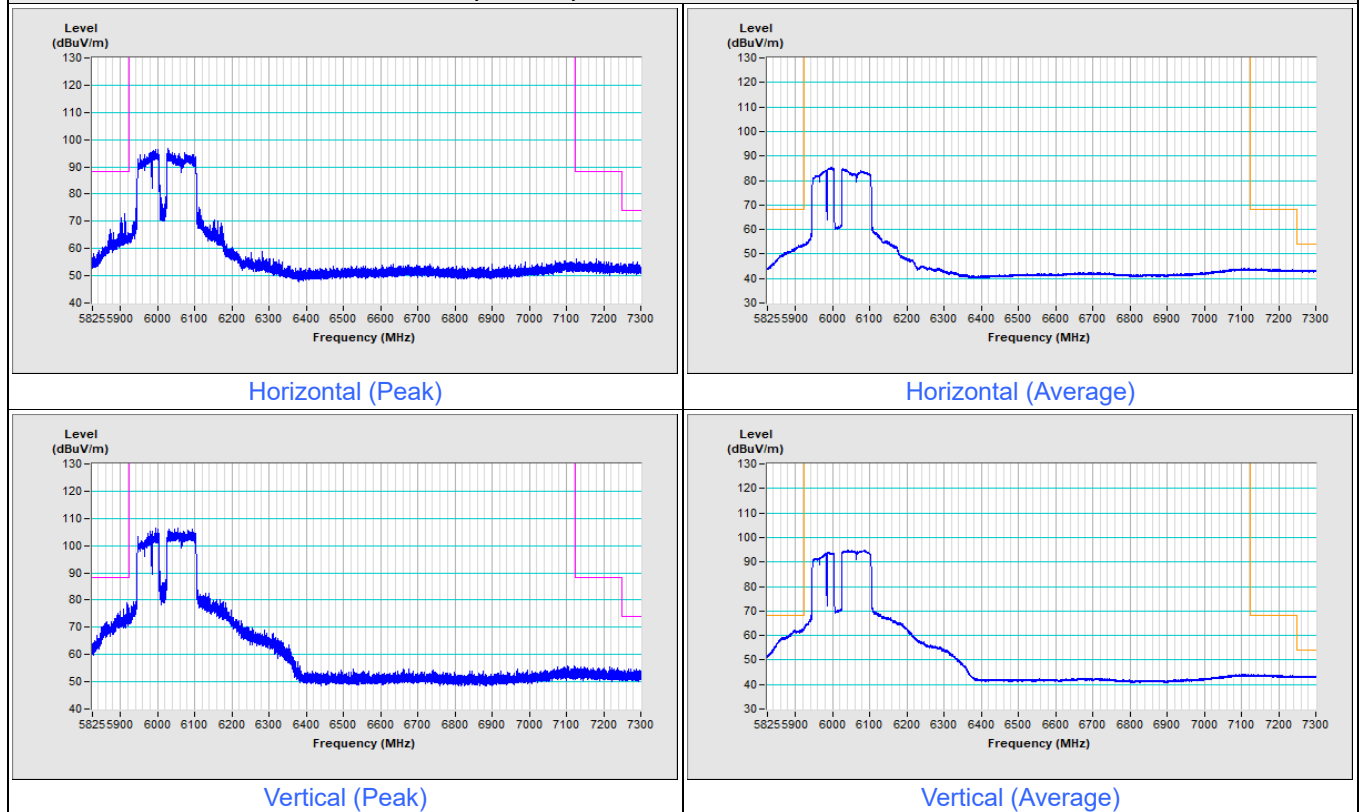


802.11be (EHT160) 996+484+242-tone MRU Channel 207

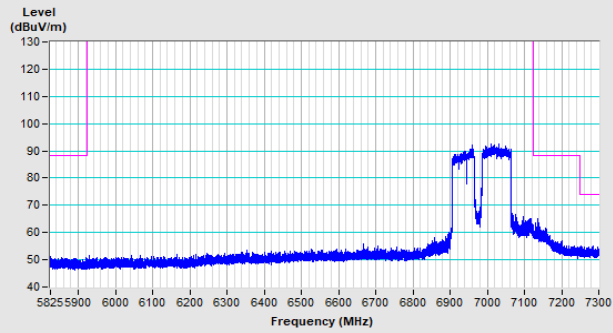


Horizontal (Peak)

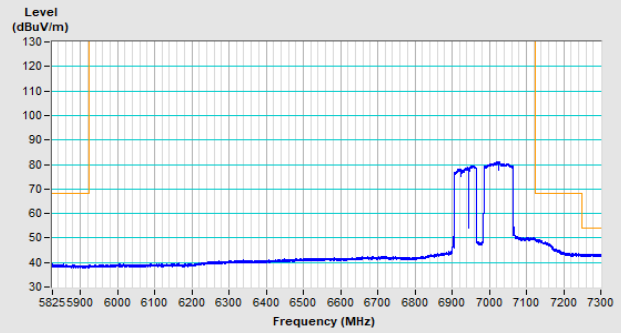

Horizontal (Average)

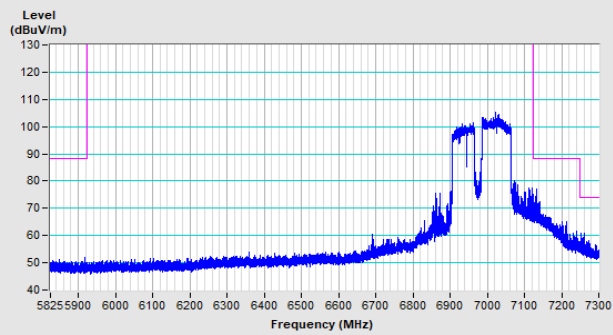

Vertical (Peak)

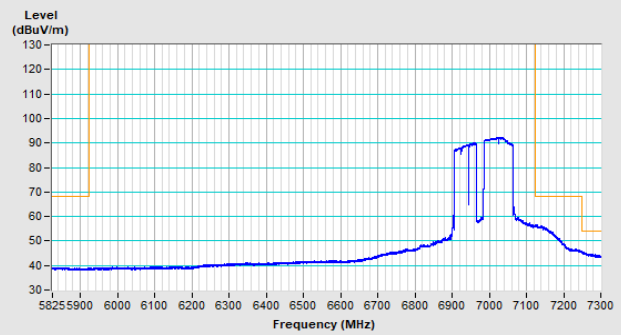

Vertical (Average)

Mode C
2Tx

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	54.8 PK	88.2	-33.4	1.46 H	189	50.5	4.3
2	#5925.00	41.4 AV	68.2	-26.8	1.46 H	189	37.1	4.3
3	*5955.00	103.6 PK			1.46 H	189	99.1	4.5
4	*5955.00	94.4 AV			1.46 H	189	89.9	4.5
5	11910.00	52.2 PK	74.0	-21.8	3.58 H	205	40.0	12.2
6	11910.00	39.5 AV	54.0	-14.5	3.58 H	205	27.3	12.2
7	17865.00	55.6 PK	74.0	-18.4	2.93 H	320	33.7	21.9
8	17865.00	44.1 AV	54.0	-9.9	2.93 H	320	22.2	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.3 PK	88.2	-21.9	1.47 V	264	62.0	4.3
2	#5925.00	53.2 AV	68.2	-15.0	1.47 V	264	48.9	4.3
3	*5955.00	116.1 PK			1.47 V	264	111.6	4.5
4	*5955.00	107.3 AV			1.47 V	264	102.8	4.5
5	11910.00	54.0 PK	74.0	-20.0	3.95 V	319	41.8	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.95 V	319	29.6	12.2
7	17865.00	57.4 PK	74.0	-16.6	3.34 V	166	35.5	21.9
8	17865.00	45.8 AV	54.0	-8.2	3.34 V	166	23.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	103.7 PK			2.35 H	125	98.9	4.8
2	*6195.00	94.9 AV			2.35 H	125	90.1	4.8
3	12390.00	52.8 PK	74.0	-21.2	3.47 H	210	40.5	12.3
4	12390.00	39.4 AV	54.0	-14.6	3.47 H	210	27.1	12.3
5	18585.00	55.2 PK	74.0	-18.8	3.04 H	282	60.2	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.04 H	282	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	115.1 PK			1.82 V	85	110.3	4.8
2	*6195.00	107.5 AV			1.82 V	85	102.7	4.8
3	12390.00	54.4 PK	74.0	-19.6	3.81 V	339	42.1	12.3
4	12390.00	41.8 AV	54.0	-12.2	3.81 V	339	29.5	12.3
5	18585.00	57.2 PK	74.0	-16.8	3.44 V	176	62.2	-5.0
6	18585.00	46.4 AV	54.0	-7.6	3.44 V	176	51.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.4 PK			2.69 H	97	97.0	6.4
2	*6415.00	95.3 AV			2.69 H	97	88.9	6.4
3	#12830.00	52.4 PK	88.2	-35.8	3.52 H	192	39.4	13.0
4	#12830.00	39.1 AV	68.2	-29.1	3.52 H	192	26.1	13.0
5	19245.00	54.8 PK	74.0	-19.2	3.07 H	314	58.6	-3.8
6	19245.00	43.2 AV	54.0	-10.8	3.07 H	314	47.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	117.9 PK			1.90 V	86	111.5	6.4
2	*6415.00	109.0 AV			1.90 V	86	102.6	6.4
3	#12830.00	54.3 PK	88.2	-33.9	3.77 V	338	41.3	13.0
4	#12830.00	41.4 AV	68.2	-26.8	3.77 V	338	28.4	13.0
5	19245.00	56.9 PK	74.0	-17.1	3.12 V	174	60.7	-3.8
6	19245.00	45.7 AV	54.0	-8.3	3.12 V	174	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	89.6 PK			1.47 H	93	83.2	6.4
2	*6435.00	80.6 AV			1.47 H	93	74.2	6.4
3	#12870.00	48.8 PK	88.2	-39.4	3.38 H	258	35.8	13.0
4	#12870.00	36.2 AV	68.2	-32.0	3.38 H	258	23.2	13.0
5	19305.00	55.2 PK	74.0	-18.8	3.67 H	227	58.9	-3.7
6	19305.00	45.0 AV	54.0	-9.0	3.67 H	227	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	100.2 PK			1.72 V	276	93.8	6.4
2	*6435.00	91.5 AV			1.72 V	276	85.1	6.4
3	#12870.00	48.4 PK	88.2	-39.8	2.89 V	133	35.4	13.0
4	#12870.00	35.2 AV	68.2	-33.0	2.89 V	133	22.2	13.0
5	19305.00	55.9 PK	74.0	-18.1	3.12 V	72	59.6	-3.7
6	19305.00	44.6 AV	54.0	-9.4	3.12 V	72	48.3	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	104.3 PK			2.43 H	98	97.7	6.6
2	*6475.00	95.6 AV			2.43 H	98	89.0	6.6
3	#12950.00	51.6 PK	88.2	-36.6	3.41 H	230	38.5	13.1
4	#12950.00	39.5 AV	68.2	-28.7	3.41 H	230	26.4	13.1
5	19425.00	55.2 PK	74.0	-18.8	3.12 H	319	59.0	-3.8
6	19425.00	43.9 AV	54.0	-10.1	3.12 H	319	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	118.2 PK			1.84 V	86	111.6	6.6
2	*6475.00	109.4 AV			1.84 V	86	102.8	6.6
3	#12950.00	53.7 PK	88.2	-34.5	3.70 V	328	40.6	13.1
4	#12950.00	41.9 AV	68.2	-26.3	3.70 V	328	28.8	13.1
5	19425.00	57.0 PK	74.0	-17.0	3.28 V	194	60.8	-3.8
6	19425.00	45.6 AV	54.0	-8.4	3.28 V	194	49.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	89.4 PK			1.26 H	73	82.5	6.9
2	*6515.00	80.6 AV			1.26 H	73	73.7	6.9
3	#13030.00	48.5 PK	88.2	-39.7	3.21 H	254	35.3	13.2
4	#13030.00	36.1 AV	68.2	-32.1	3.21 H	254	22.9	13.2
5	19545.00	56.7 PK	74.0	-17.3	3.54 H	222	60.8	-4.1
6	19545.00	43.6 AV	54.0	-10.4	3.54 H	222	47.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	100.7 PK			1.20 V	125	93.8	6.9
2	*6515.00	92.3 AV			1.20 V	125	85.4	6.9
3	#13030.00	48.2 PK	88.2	-40.0	2.46 V	92	35.0	13.2
4	#13030.00	34.9 AV	68.2	-33.3	2.46 V	92	21.7	13.2
5	19545.00	55.6 PK	74.0	-18.4	2.87 V	33	59.7	-4.1
6	19545.00	44.8 AV	54.0	-9.2	2.87 V	33	48.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.4 PK			2.86 H	130	98.5	6.9
2	*6535.00	96.1 AV			2.86 H	130	89.2	6.9
3	#13070.00	52.9 PK	88.2	-35.3	3.59 H	213	39.7	13.2
4	#13070.00	39.9 AV	68.2	-28.3	3.59 H	213	26.7	13.2
5	19605.00	55.5 PK	74.0	-18.5	2.98 H	310	59.5	-4.0
6	19605.00	43.5 AV	54.0	-10.5	2.98 H	310	47.5	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.4 PK			1.89 V	86	111.5	6.9
2	*6535.00	109.9 AV			1.89 V	86	103.0	6.9
3	#13070.00	54.6 PK	88.2	-33.6	3.97 V	319	41.4	13.2
4	#13070.00	42.2 AV	68.2	-26.0	3.97 V	319	29.0	13.2
5	19605.00	57.0 PK	74.0	-17.0	3.45 V	173	61.0	-4.0
6	19605.00	45.6 AV	54.0	-8.4	3.45 V	173	49.6	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	106.4 PK			2.68 H	131	99.2	7.2
2	*6695.00	97.5 AV			2.68 H	131	90.3	7.2
3	13390.00	51.6 PK	74.0	-22.4	3.47 H	213	37.6	14.0
4	13390.00	40.1 AV	54.0	-13.9	3.47 H	213	26.1	14.0
5	20085.00	55.4 PK	74.0	-18.6	2.95 H	290	58.9	-3.5
6	20085.00	43.2 AV	54.0	-10.8	2.95 H	290	46.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.8 PK			1.86 V	86	111.6	7.2
2	*6695.00	110.2 AV			1.86 V	86	103.0	7.2
3	13390.00	53.9 PK	74.0	-20.1	3.78 V	325	39.9	14.0
4	13390.00	42.1 AV	54.0	-11.9	3.78 V	325	28.1	14.0
5	20085.00	57.0 PK	74.0	-17.0	3.39 V	196	60.5	-3.5
6	20085.00	45.7 AV	54.0	-8.3	3.39 V	196	49.2	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.6 PK			2.64 H	131	100.4	7.2
2	*6855.00	98.5 AV			2.64 H	131	91.3	7.2
3	#13710.00	51.9 PK	88.2	-36.3	3.57 H	192	36.7	15.2
4	#13710.00	40.7 AV	68.2	-27.5	3.57 H	192	25.5	15.2
5	20565.00	55.9 PK	74.0	-18.1	3.02 H	283	59.2	-3.3
6	20565.00	44.9 AV	54.0	-9.1	3.02 H	283	48.2	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.5 PK			1.67 V	265	110.3	7.2
2	*6855.00	108.7 AV			1.67 V	265	101.5	7.2
3	#13710.00	53.8 PK	88.2	-34.4	4.00 V	341	38.6	15.2
4	#13710.00	42.3 AV	68.2	-25.9	4.00 V	341	27.1	15.2
5	20565.00	57.6 PK	74.0	-16.4	3.45 V	162	60.9	-3.3
6	20565.00	46.4 AV	54.0	-7.6	3.45 V	162	49.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	90.0 PK			1.53 H	80	82.8	7.2
2	*6875.00	80.7 AV			1.53 H	80	73.5	7.2
3	#13750.00	48.1 PK	88.2	-40.1	3.25 H	249	33.0	15.1
4	#13750.00	35.9 AV	68.2	-32.3	3.25 H	249	20.8	15.1
5	20625.00	56.7 PK	74.0	-17.3	3.79 H	231	60.0	-3.3
6	20625.00	44.5 AV	54.0	-9.5	3.79 H	231	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	100.3 PK			1.74 V	281	93.1	7.2
2	*6875.00	90.9 AV			1.74 V	281	83.7	7.2
3	#13750.00	49.2 PK	88.2	-39.0	2.35 V	96	34.1	15.1
4	#13750.00	34.7 AV	68.2	-33.5	2.35 V	96	19.6	15.1
5	20625.00	56.8 PK	74.0	-17.2	2.83 V	27	60.1	-3.3
6	20625.00	45.2 AV	54.0	-8.8	2.83 V	27	48.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	88.7 PK			1.46 H	65	80.7	8.0
2	*6995.00	79.1 AV			1.46 H	65	71.1	8.0
3	#13990.00	48.9 PK	88.2	-39.3	3.44 H	252	33.3	15.6
4	#13990.00	35.5 AV	68.2	-32.7	3.44 H	252	19.9	15.6
5	20985.00	55.7 PK	74.0	-18.3	3.51 H	202	58.5	-2.8
6	20985.00	44.6 AV	54.0	-9.4	3.51 H	202	47.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	99.1 PK			1.64 V	278	91.1	8.0
2	*6995.00	90.2 AV			1.64 V	278	82.2	8.0
3	#13990.00	48.0 PK	88.2	-40.2	2.48 V	77	32.4	15.6
4	#13990.00	35.7 AV	68.2	-32.5	2.48 V	77	20.1	15.6
5	20985.00	55.7 PK	74.0	-18.3	2.78 V	41	58.5	-2.8
6	20985.00	44.2 AV	54.0	-9.8	2.78 V	41	47.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	88.0 PK			1.19 H	69	78.5	9.5
2	*7115.00	79.5 AV			1.19 H	69	70.0	9.5
3	#7125.00	62.7 PK	88.2	-25.5	1.19 H	69	53.3	9.4
4	#7125.00	47.9 AV	68.2	-20.3	1.19 H	69	38.5	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.19 H	69	46.5	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.19 H	69	34.6	8.7
7	#14230.00	48.1 PK	88.2	-40.1	3.36 H	244	32.8	15.3
8	#14230.00	35.5 AV	68.2	-32.7	3.36 H	244	20.2	15.3
9	21345.00	55.9 PK	74.0	-18.1	3.53 H	214	57.5	-1.6
10	21345.00	43.8 AV	54.0	-10.2	3.53 H	214	45.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	99.7 PK			1.44 V	85	90.2	9.5
2	*7115.00	91.0 AV			1.44 V	85	81.5	9.5
3	#7125.00	73.8 PK	88.2	-14.4	1.44 V	85	64.4	9.4
4	#7125.00	56.5 AV	68.2	-11.7	1.44 V	85	47.1	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.44 V	85	46.1	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.44 V	85	34.6	8.7
7	#14230.00	48.5 PK	88.2	-39.7	2.40 V	90	33.2	15.3
8	#14230.00	36.0 AV	68.2	-32.2	2.40 V	90	20.7	15.3
9	21345.00	56.0 PK	74.0	-18.0	2.73 V	25	57.6	-1.6
10	21345.00	45.0 AV	54.0	-9.0	2.73 V	25	46.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2Tx NSS2

RF Mode	802.11be (EHT20)	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.0 PK	88.2	-24.2	2.47 H	218	59.7	4.3
2	#5925.00	47.3 AV	68.2	-20.9	2.47 H	218	43.0	4.3
3	*5955.00	104.6 PK			2.47 H	218	100.1	4.5
4	*5955.00	93.4 AV			2.47 H	218	88.9	4.5
5	11910.00	52.2 PK	74.0	-21.8	3.50 H	219	40.0	12.2
6	11910.00	40.0 AV	54.0	-14.0	3.50 H	219	27.8	12.2
7	17865.00	55.2 PK	74.0	-18.8	2.87 H	319	33.3	21.9
8	17865.00	44.4 AV	54.0	-9.6	2.87 H	319	22.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.8 PK	88.2	-19.4	1.46 V	264	64.5	4.3
2	#5925.00	61.2 AV	68.2	-7.0	1.46 V	264	56.9	4.3
3	*5955.00	117.7 PK			1.46 V	264	113.2	4.5
4	*5955.00	106.0 AV			1.46 V	264	101.5	4.5
5	11910.00	54.1 PK	74.0	-19.9	3.89 V	303	41.9	12.2
6	11910.00	41.8 AV	54.0	-12.2	3.89 V	303	29.6	12.2
7	17865.00	57.3 PK	74.0	-16.7	3.26 V	182	35.4	21.9
8	17865.00	46.3 AV	54.0	-7.7	3.26 V	182	24.4	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	104.9 PK			2.36 H	130	100.1	4.8
2	*6195.00	94.2 AV			2.36 H	130	89.4	4.8
3	12390.00	51.5 PK	74.0	-22.5	3.40 H	202	39.2	12.3
4	12390.00	40.1 AV	54.0	-13.9	3.40 H	202	27.8	12.3
5	18585.00	54.9 PK	74.0	-19.1	2.96 H	316	59.9	-5.0
6	18585.00	44.4 AV	54.0	-9.6	2.96 H	316	49.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	116.6 PK			1.81 V	85	111.8	4.8
2	*6195.00	105.8 AV			1.81 V	85	101.0	4.8
3	12390.00	53.8 PK	74.0	-20.2	3.73 V	322	41.5	12.3
4	12390.00	41.9 AV	54.0	-12.1	3.73 V	322	29.6	12.3
5	18585.00	56.7 PK	74.0	-17.3	3.30 V	164	61.7	-5.0
6	18585.00	46.3 AV	54.0	-7.7	3.30 V	164	51.3	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	105.6 PK			2.53 H	98	99.2	6.4
2	*6415.00	96.2 AV			2.53 H	98	89.8	6.4
3	#12830.00	51.6 PK	88.2	-36.6	3.58 H	198	38.6	13.0
4	#12830.00	39.7 AV	68.2	-28.5	3.58 H	198	26.7	13.0
5	19245.00	55.2 PK	74.0	-18.8	2.97 H	304	59.0	-3.8
6	19245.00	43.9 AV	54.0	-10.1	2.97 H	304	47.7	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	118.5 PK			1.89 V	86	112.1	6.4
2	*6415.00	107.8 AV			1.89 V	86	101.4	6.4
3	#12830.00	53.7 PK	88.2	-34.5	3.87 V	348	40.7	13.0
4	#12830.00	41.4 AV	68.2	-26.8	3.87 V	348	28.4	13.0
5	19245.00	57.4 PK	74.0	-16.6	3.32 V	200	61.2	-3.8
6	19245.00	46.2 AV	54.0	-7.8	3.32 V	200	50.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	92.4 PK			1.33 H	64	86.0	6.4
2	*6435.00	80.7 AV			1.33 H	64	74.3	6.4
3	#12870.00	49.3 PK	88.2	-38.9	3.22 H	265	36.3	13.0
4	#12870.00	34.8 AV	68.2	-33.4	3.22 H	265	21.8	13.0
5	19305.00	55.3 PK	74.0	-18.7	3.60 H	230	59.0	-3.7
6	19305.00	44.5 AV	54.0	-9.5	3.60 H	230	48.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.5 PK			1.72 V	274	97.1	6.4
2	*6435.00	91.9 AV			1.72 V	274	85.5	6.4
3	#12870.00	48.2 PK	88.2	-40.0	2.68 V	76	35.2	13.0
4	#12870.00	35.6 AV	68.2	-32.6	2.68 V	76	22.6	13.0
5	19305.00	55.2 PK	74.0	-18.8	2.64 V	34	58.9	-3.7
6	19305.00	44.7 AV	54.0	-9.3	2.64 V	34	48.4	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.5 PK			2.56 H	88	98.9	6.6
2	*6475.00	96.3 AV			2.56 H	88	89.7	6.6
3	#12950.00	52.0 PK	88.2	-36.2	3.33 H	205	38.9	13.1
4	#12950.00	40.2 AV	68.2	-28.0	3.33 H	205	27.1	13.1
5	19425.00	55.5 PK	74.0	-18.5	2.80 H	319	59.3	-3.8
6	19425.00	43.5 AV	54.0	-10.5	2.80 H	319	47.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	119.0 PK			1.85 V	86	112.4	6.6
2	*6475.00	108.2 AV			1.85 V	86	101.6	6.6
3	#12950.00	53.8 PK	88.2	-34.4	3.81 V	330	40.7	13.1
4	#12950.00	42.1 AV	68.2	-26.1	3.81 V	330	29.0	13.1
5	19425.00	57.5 PK	74.0	-16.5	3.09 V	194	61.3	-3.8
6	19425.00	45.7 AV	54.0	-8.3	3.09 V	194	49.5	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.6 PK			1.42 H	81	84.7	6.9
2	*6515.00	79.9 AV			1.42 H	81	73.0	6.9
3	#13030.00	47.6 PK	88.2	-40.6	3.39 H	262	34.4	13.2
4	#13030.00	35.6 AV	68.2	-32.6	3.39 H	262	22.4	13.2
5	19545.00	56.3 PK	74.0	-17.7	3.78 H	233	60.4	-4.1
6	19545.00	44.6 AV	54.0	-9.4	3.78 H	233	48.7	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.9 PK			1.69 V	276	96.0	6.9
2	*6515.00	91.8 AV			1.69 V	276	84.9	6.9
3	#13030.00	47.4 PK	88.2	-40.8	2.59 V	109	34.2	13.2
4	#13030.00	35.2 AV	68.2	-33.0	2.59 V	109	22.0	13.2
5	19545.00	55.6 PK	74.0	-18.4	2.98 V	13	59.7	-4.1
6	19545.00	45.4 AV	54.0	-8.6	2.98 V	13	49.5	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	105.2 PK			2.49 H	93	98.3	6.9
2	*6535.00	96.0 AV			2.49 H	93	89.1	6.9
3	#13070.00	52.2 PK	88.2	-36.0	3.30 H	229	39.0	13.2
4	#13070.00	40.1 AV	68.2	-28.1	3.30 H	229	26.9	13.2
5	19605.00	55.1 PK	74.0	-18.9	2.78 H	314	59.1	-4.0
6	19605.00	44.3 AV	54.0	-9.7	2.78 H	314	48.3	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.3 PK			1.89 V	86	112.4	6.9
2	*6535.00	109.1 AV			1.89 V	86	102.2	6.9
3	#13070.00	54.3 PK	88.2	-33.9	3.94 V	339	41.1	13.2
4	#13070.00	41.8 AV	68.2	-26.4	3.94 V	339	28.6	13.2
5	19605.00	57.3 PK	74.0	-16.7	3.32 V	180	61.3	-4.0
6	19605.00	45.8 AV	54.0	-8.2	3.32 V	180	49.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	105.1 PK			2.52 H	98	97.9	7.2
2	*6695.00	95.7 AV			2.52 H	98	88.5	7.2
3	13390.00	52.1 PK	74.0	-21.9	3.43 H	204	38.1	14.0
4	13390.00	39.6 AV	54.0	-14.4	3.43 H	204	25.6	14.0
5	20085.00	54.4 PK	74.0	-19.6	3.12 H	308	57.9	-3.5
6	20085.00	44.2 AV	54.0	-9.8	3.12 H	308	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	119.7 PK			1.85 V	87	112.5	7.2
2	*6695.00	108.6 AV			1.85 V	87	101.4	7.2
3	13390.00	54.3 PK	74.0	-19.7	3.73 V	311	40.3	14.0
4	13390.00	41.8 AV	54.0	-12.2	3.73 V	311	27.8	14.0
5	20085.00	56.8 PK	74.0	-17.2	3.28 V	193	60.3	-3.5
6	20085.00	46.4 AV	54.0	-7.6	3.28 V	193	49.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.7 PK			2.57 H	110	98.5	7.2
2	*6855.00	96.4 AV			2.57 H	110	89.2	7.2
3	#13710.00	51.7 PK	88.2	-36.5	3.48 H	212	36.5	15.2
4	#13710.00	38.7 AV	68.2	-29.5	3.48 H	212	23.5	15.2
5	20565.00	54.2 PK	74.0	-19.8	2.98 H	318	57.5	-3.3
6	20565.00	42.8 AV	54.0	-11.2	2.98 H	318	46.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	118.1 PK			1.85 V	89	110.9	7.2
2	*6855.00	107.1 AV			1.85 V	89	99.9	7.2
3	#13710.00	53.4 PK	88.2	-34.8	3.79 V	312	38.2	15.2
4	#13710.00	40.9 AV	68.2	-27.3	3.79 V	312	25.7	15.2
5	20565.00	56.2 PK	74.0	-17.8	3.08 V	198	59.5	-3.3
6	20565.00	45.1 AV	54.0	-8.9	3.08 V	198	48.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	90.7 PK			1.55 H	95	83.5	7.2
2	*6875.00	79.4 AV			1.55 H	95	72.2	7.2
3	#13750.00	48.2 PK	88.2	-40.0	3.26 H	266	33.1	15.1
4	#13750.00	36.1 AV	68.2	-32.1	3.26 H	266	21.0	15.1
5	20625.00	55.3 PK	74.0	-18.7	3.46 H	228	58.6	-3.3
6	20625.00	44.1 AV	54.0	-9.9	3.46 H	228	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	101.8 PK			1.79 V	282	94.6	7.2
2	*6875.00	91.2 AV			1.79 V	282	84.0	7.2
3	#13750.00	47.7 PK	88.2	-40.5	2.56 V	93	32.6	15.1
4	#13750.00	36.4 AV	68.2	-31.8	2.56 V	93	21.3	15.1
5	20625.00	56.5 PK	74.0	-17.5	2.80 V	41	59.8	-3.3
6	20625.00	45.1 AV	54.0	-8.9	2.80 V	41	48.4	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	90.8 PK			1.42 H	81	82.8	8.0
2	*6995.00	79.6 AV			1.42 H	81	71.6	8.0
3	#13990.00	49.2 PK	88.2	-39.0	3.54 H	248	33.6	15.6
4	#13990.00	35.7 AV	68.2	-32.5	3.54 H	248	20.1	15.6
5	20985.00	56.2 PK	74.0	-17.8	3.78 H	203	59.0	-2.8
6	20985.00	44.5 AV	54.0	-9.5	3.78 H	203	47.3	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.0 PK			1.61 V	279	94.0	8.0
2	*6995.00	91.4 AV			1.61 V	279	83.4	8.0
3	#13990.00	48.3 PK	88.2	-39.9	2.36 V	110	32.7	15.6
4	#13990.00	35.1 AV	68.2	-33.1	2.36 V	110	19.5	15.6
5	20985.00	55.9 PK	74.0	-18.1	2.87 V	13	58.7	-2.8
6	20985.00	45.0 AV	54.0	-9.0	2.87 V	13	47.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.6 PK			1.12 H	72	82.1	9.5
2	*7115.00	79.4 AV			1.12 H	72	69.9	9.5
3	#7125.00	75.8 PK	88.2	-12.4	1.12 H	72	66.4	9.4
4	#7125.00	53.5 AV	68.2	-14.7	1.12 H	72	44.1	9.4
5	7250.00	54.6 PK	74.0	-19.4	1.12 H	72	45.9	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.12 H	72	34.8	8.7
7	#14230.00	49.3 PK	88.2	-38.9	3.55 H	265	34.0	15.3
8	#14230.00	35.7 AV	68.2	-32.5	3.55 H	265	20.4	15.3
9	21345.00	55.3 PK	74.0	-18.7	3.45 H	232	56.9	-1.6
10	21345.00	44.1 AV	54.0	-9.9	3.45 H	232	45.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.8 PK			1.36 V	85	92.3	9.5
2	*7115.00	90.5 AV			1.36 V	85	81.0	9.5
3	#7125.00	86.2 PK	88.2	-2.0	1.36 V	85	76.8	9.4
4	#7125.00	64.9 AV	68.2	-3.3	1.36 V	85	55.5	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.36 V	85	46.3	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.36 V	85	34.7	8.7
7	#14230.00	49.1 PK	88.2	-39.1	2.31 V	75	33.8	15.3
8	#14230.00	35.6 AV	68.2	-32.6	2.31 V	75	20.3	15.3
9	21345.00	56.4 PK	74.0	-17.6	2.69 V	42	58.0	-1.6
10	21345.00	45.0 AV	54.0	-9.0	2.69 V	42	46.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.1 PK	88.2	-17.1	2.44 H	242	66.8	4.3
2	#5925.00	58.3 AV	68.2	-9.9	2.44 H	242	54.0	4.3
3	*5965.00	100.0 PK			2.44 H	242	95.6	4.4
4	*5965.00	89.6 AV			2.44 H	242	85.2	4.4
5	11930.00	48.3 PK	74.0	-25.7	3.35 H	204	36.2	12.1
6	11930.00	37.0 AV	54.0	-17.0	3.35 H	204	24.9	12.1
7	17895.00	53.0 PK	74.0	-21.0	3.15 H	307	30.7	22.3
8	17895.00	41.3 AV	54.0	-12.7	3.15 H	307	19.0	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	83.8 PK	88.2	-4.4	1.60 V	265	79.5	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.60 V	265	62.3	4.3
3	*5965.00	112.0 PK			1.60 V	265	107.6	4.4
4	*5965.00	101.7 AV			1.60 V	265	97.3	4.4
5	11930.00	50.3 PK	74.0	-23.7	3.86 V	335	38.2	12.1
6	11930.00	39.2 AV	54.0	-14.8	3.86 V	335	27.1	12.1
7	17895.00	55.3 PK	74.0	-18.7	3.09 V	174	33.0	22.3
8	17895.00	43.3 AV	54.0	-10.7	3.09 V	174	21.0	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 51 : 6205 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	99.9 PK			2.45 H	236	95.0	4.9
2	*6205.00	89.5 AV			2.45 H	236	84.6	4.9
3	12410.00	49.8 PK	74.0	-24.2	3.48 H	198	37.5	12.3
4	12410.00	38.1 AV	54.0	-15.9	3.48 H	198	25.8	12.3
5	18615.00	54.7 PK	74.0	-19.3	2.98 H	293	59.6	-4.9
6	18615.00	43.7 AV	54.0	-10.3	2.98 H	293	48.6	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6205.00	113.7 PK			1.85 V	89	108.8	4.9
2	*6205.00	103.9 AV			1.85 V	89	99.0	4.9
3	12410.00	51.4 PK	74.0	-22.6	3.52 V	186	39.1	12.3
4	12410.00	39.8 AV	54.0	-14.2	3.52 V	186	27.5	12.3
5	18615.00	56.5 PK	74.0	-17.5	3.69 V	15	61.4	-4.9
6	18615.00	45.3 AV	54.0	-8.7	3.69 V	15	50.2	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	99.8 PK			2.39 H	248	93.4	6.4
2	*6405.00	89.4 AV			2.39 H	248	83.0	6.4
3	#12810.00	49.8 PK	88.2	-38.4	3.48 H	206	37.0	12.8
4	#12810.00	38.0 AV	68.2	-30.2	3.48 H	206	25.2	12.8
5	19215.00	53.5 PK	74.0	-20.5	2.81 H	293	57.2	-3.7
6	19215.00	43.3 AV	54.0	-10.7	2.81 H	293	47.0	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	117.2 PK			1.84 V	86	110.8	6.4
2	*6405.00	105.5 AV			1.84 V	86	99.1	6.4
3	#12810.00	51.3 PK	88.2	-36.9	3.93 V	335	38.5	12.8
4	#12810.00	40.0 AV	68.2	-28.2	3.93 V	335	27.2	12.8
5	19215.00	56.0 PK	74.0	-18.0	3.06 V	193	59.7	-3.7
6	19215.00	45.1 AV	54.0	-8.9	3.06 V	193	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	92.7 PK			1.30 H	92	86.3	6.4
2	*6445.00	80.4 AV			1.30 H	92	74.0	6.4
3	#12890.00	47.8 PK	88.2	-40.4	3.41 H	238	34.8	13.0
4	#12890.00	35.6 AV	68.2	-32.6	3.41 H	238	22.6	13.0
5	19335.00	56.4 PK	74.0	-17.6	3.66 H	208	60.1	-3.7
6	19335.00	44.6 AV	54.0	-9.4	3.66 H	208	48.3	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	102.9 PK			1.23 V	140	96.5	6.4
2	*6445.00	92.1 AV			1.23 V	140	85.7	6.4
3	#12890.00	48.3 PK	88.2	-39.9	2.51 V	77	35.3	13.0
4	#12890.00	36.0 AV	68.2	-32.2	2.51 V	77	23.0	13.0
5	19335.00	55.4 PK	74.0	-18.6	2.80 V	43	59.1	-3.7
6	19335.00	44.1 AV	54.0	-9.9	2.80 V	43	47.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	99.9 PK			2.41 H	253	93.2	6.7
2	*6485.00	89.4 AV			2.41 H	253	82.7	6.7
3	#12970.00	49.7 PK	88.2	-38.5	3.31 H	210	36.6	13.1
4	#12970.00	37.5 AV	68.2	-30.7	3.31 H	210	24.4	13.1
5	19455.00	54.0 PK	74.0	-20.0	2.88 H	320	57.9	-3.9
6	19455.00	43.2 AV	54.0	-10.8	2.88 H	320	47.1	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	116.2 PK			1.86 V	86	109.5	6.7
2	*6485.00	105.6 AV			1.86 V	86	98.9	6.7
3	#12970.00	51.3 PK	88.2	-36.9	3.79 V	312	38.2	13.1
4	#12970.00	39.4 AV	68.2	-28.8	3.79 V	312	26.3	13.1
5	19455.00	56.1 PK	74.0	-17.9	3.31 V	189	60.0	-3.9
6	19455.00	45.3 AV	54.0	-8.7	3.31 V	189	49.2	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	91.7 PK			1.35 H	94	84.8	6.9
2	*6525.00	80.3 AV			1.35 H	94	73.4	6.9
3	#13050.00	48.9 PK	88.2	-39.3	3.17 H	263	35.7	13.2
4	#13050.00	36.1 AV	68.2	-32.1	3.17 H	263	22.9	13.2
5	19575.00	55.0 PK	74.0	-19.0	3.77 H	216	59.1	-4.1
6	19575.00	43.4 AV	54.0	-10.6	3.77 H	216	47.5	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	102.5 PK			1.40 V	127	95.6	6.9
2	*6525.00	91.9 AV			1.40 V	127	85.0	6.9
3	#13050.00	48.9 PK	88.2	-39.3	2.47 V	85	35.7	13.2
4	#13050.00	34.7 AV	68.2	-33.5	2.47 V	85	21.5	13.2
5	19575.00	55.2 PK	74.0	-18.8	2.69 V	52	59.3	-4.1
6	19575.00	44.2 AV	54.0	-9.8	2.69 V	52	48.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	100.4 PK			2.47 H	244	93.5	6.9
2	*6565.00	89.8 AV			2.47 H	244	82.9	6.9
3	#13130.00	49.1 PK	88.2	-39.1	3.39 H	230	35.9	13.2
4	#13130.00	38.0 AV	68.2	-30.2	3.39 H	230	24.8	13.2
5	19695.00	53.9 PK	74.0	-20.1	2.84 H	320	57.8	-3.9
6	19695.00	42.5 AV	54.0	-11.5	2.84 H	320	46.4	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	116.0 PK			1.89 V	87	109.1	6.9
2	*6565.00	105.6 AV			1.89 V	87	98.7	6.9
3	#13130.00	50.7 PK	88.2	-37.5	3.84 V	329	37.5	13.2
4	#13130.00	39.7 AV	68.2	-28.5	3.84 V	329	26.5	13.2
5	19695.00	56.3 PK	74.0	-17.7	3.44 V	176	60.2	-3.9
6	19695.00	44.8 AV	54.0	-9.2	3.44 V	176	48.7	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 147 : 6685 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	99.9 PK			2.48 H	230	92.7	7.2
2	*6685.00	89.7 AV			2.48 H	230	82.5	7.2
3	13370.00	47.1 PK	74.0	-26.9	3.31 H	198	33.1	14.0
4	13370.00	37.2 AV	54.0	-16.8	3.31 H	198	23.2	14.0
5	20055.00	52.8 PK	74.0	-21.2	3.09 H	294	56.3	-3.5
6	20055.00	42.8 AV	54.0	-11.2	3.09 H	294	46.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6685.00	117.6 PK			1.85 V	88	110.4	7.2
2	*6685.00	105.9 AV			1.85 V	88	98.7	7.2
3	13370.00	49.3 PK	74.0	-24.7	3.80 V	312	35.3	14.0
4	13370.00	39.5 AV	54.0	-14.5	3.80 V	312	25.5	14.0
5	20055.00	55.1 PK	74.0	-18.9	3.31 V	186	58.6	-3.5
6	20055.00	44.4 AV	54.0	-9.6	3.31 V	186	47.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	100.2 PK			2.42 H	244	93.1	7.1
2	*6845.00	89.9 AV			2.42 H	244	82.8	7.1
3	#13690.00	47.0 PK	88.2	-41.2	3.49 H	226	31.9	15.1
4	#13690.00	37.7 AV	68.2	-30.5	3.49 H	226	22.6	15.1
5	20535.00	53.6 PK	74.0	-20.4	3.09 H	317	56.8	-3.2
6	20535.00	42.2 AV	54.0	-11.8	3.09 H	317	45.4	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	115.5 PK			1.80 V	89	108.4	7.1
2	*6845.00	104.6 AV			1.80 V	89	97.5	7.1
3	#13690.00	49.2 PK	88.2	-39.0	3.71 V	344	34.1	15.1
4	#13690.00	39.2 AV	68.2	-29.0	3.71 V	344	24.1	15.1
5	20535.00	55.2 PK	74.0	-18.8	3.12 V	193	58.4	-3.2
6	20535.00	44.5 AV	54.0	-9.5	3.12 V	193	47.7	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	90.8 PK			1.31 H	84	83.6	7.2
2	*6885.00	80.4 AV			1.31 H	84	73.2	7.2
3	#13770.00	47.7 PK	88.2	-40.5	3.22 H	251	32.7	15.0
4	#13770.00	34.9 AV	68.2	-33.3	3.22 H	251	19.9	15.0
5	20655.00	55.3 PK	74.0	-18.7	3.40 H	222	58.6	-3.3
6	20655.00	43.8 AV	54.0	-10.2	3.40 H	222	47.1	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	102.1 PK			1.22 V	145	94.9	7.2
2	*6885.00	91.0 AV			1.22 V	145	83.8	7.2
3	#13770.00	48.0 PK	88.2	-40.2	2.67 V	103	33.0	15.0
4	#13770.00	35.0 AV	68.2	-33.2	2.67 V	103	20.0	15.0
5	20655.00	56.9 PK	74.0	-17.1	2.70 V	28	60.2	-3.3
6	20655.00	44.0 AV	54.0	-10.0	2.70 V	28	47.3	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 203 : 6965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	90.9 PK			1.26 H	94	83.2	7.7
2	*6965.00	79.4 AV			1.26 H	94	71.7	7.7
3	#13930.00	48.9 PK	88.2	-39.3	3.33 H	235	33.6	15.3
4	#13930.00	36.3 AV	68.2	-31.9	3.33 H	235	21.0	15.3
5	20895.00	56.2 PK	74.0	-17.8	3.41 H	234	58.9	-2.7
6	20895.00	44.2 AV	54.0	-9.8	3.41 H	234	46.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6965.00	102.3 PK			1.16 V	132	94.6	7.7
2	*6965.00	91.2 AV			1.16 V	132	83.5	7.7
3	#13930.00	47.7 PK	88.2	-40.5	2.38 V	111	32.4	15.3
4	#13930.00	34.6 AV	68.2	-33.6	2.38 V	111	19.3	15.3
5	20895.00	56.4 PK	74.0	-17.6	2.62 V	27	59.1	-2.7
6	20895.00	44.9 AV	54.0	-9.1	2.62 V	27	47.6	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	92.1 PK			1.46 H	193	82.9	9.2
2	*7085.00	80.5 AV			1.46 H	193	71.3	9.2
3	#7125.00	55.2 PK	88.2	-33.0	1.46 H	193	45.8	9.4
4	#7125.00	43.9 AV	68.2	-24.3	1.46 H	193	34.5	9.4
5	7250.00	53.8 PK	74.0	-20.2	1.46 H	193	45.1	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.46 H	193	34.6	8.7
7	#14170.00	49.4 PK	88.2	-38.8	3.38 H	234	34.2	15.2
8	#14170.00	34.8 AV	68.2	-33.4	3.38 H	234	19.6	15.2
9	21255.00	56.7 PK	74.0	-17.3	3.61 H	205	58.1	-1.4
10	21255.00	44.1 AV	54.0	-9.9	3.61 H	205	45.5	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	101.1 PK			1.29 V	272	91.9	9.2
2	*7085.00	90.6 AV			1.29 V	272	81.4	9.2
3	#7125.00	55.7 PK	88.2	-32.5	1.29 V	272	46.3	9.4
4	#7125.00	44.4 AV	68.2	-23.8	1.29 V	272	35.0	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.29 V	272	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.29 V	272	34.8	8.7
7	#14170.00	49.4 PK	88.2	-38.8	2.40 V	87	34.2	15.2
8	#14170.00	35.3 AV	68.2	-32.9	2.40 V	87	20.1	15.2
9	21255.00	56.5 PK	74.0	-17.5	2.95 V	30	57.9	-1.4
10	21255.00	44.7 AV	54.0	-9.3	2.95 V	30	46.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	67.2 PK	88.2	-21.0	2.37 H	242	62.9	4.3
2	#5925.00	52.3 AV	68.2	-15.9	2.37 H	242	48.0	4.3
3	*5985.00	96.9 PK			2.37 H	242	92.5	4.4
4	*5985.00	85.0 AV			2.37 H	242	80.6	4.4
5	11970.00	45.4 PK	74.0	-28.6	3.53 H	224	33.2	12.2
6	11970.00	34.2 AV	54.0	-19.8	3.53 H	224	22.0	12.2
7	17955.00	53.7 PK	74.0	-20.3	3.06 H	315	30.3	23.4
8	17955.00	42.2 AV	54.0	-11.8	3.06 H	315	18.8	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.2 PK	88.2	-9.0	1.69 V	265	74.9	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.69 V	265	60.8	4.3
3	*5985.00	109.9 PK			1.69 V	265	105.5	4.4
4	*5985.00	98.8 AV			1.69 V	265	94.4	4.4
5	11970.00	47.2 PK	74.0	-26.8	3.72 V	341	35.0	12.2
6	11970.00	36.2 AV	54.0	-17.8	3.72 V	341	24.0	12.2
7	17955.00	55.2 PK	74.0	-18.8	3.43 V	198	31.8	23.4
8	17955.00	44.1 AV	54.0	-9.9	3.43 V	198	20.7	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	98.3 PK			2.36 H	249	93.3	5.0
2	*6225.00	87.6 AV			2.36 H	249	82.6	5.0
3	12450.00	47.6 PK	74.0	-26.4	3.59 H	217	35.3	12.3
4	12450.00	35.8 AV	54.0	-18.2	3.59 H	217	23.5	12.3
5	18675.00	53.1 PK	74.0	-20.9	2.81 H	315	58.0	-4.9
6	18675.00	41.5 AV	54.0	-12.5	2.81 H	315	46.4	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	113.2 PK			1.89 V	86	108.2	5.0
2	*6225.00	102.5 AV			1.89 V	86	97.5	5.0
3	12450.00	49.2 PK	74.0	-24.8	3.80 V	347	36.9	12.3
4	12450.00	37.5 AV	54.0	-16.5	3.80 V	347	25.2	12.3
5	18675.00	55.2 PK	74.0	-18.8	3.23 V	198	60.1	-4.9
6	18675.00	44.0 AV	54.0	-10.0	3.23 V	198	48.9	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	99.0 PK			2.40 H	258	92.8	6.2
2	*6385.00	87.2 AV			2.40 H	258	81.0	6.2
3	#12770.00	46.6 PK	88.2	-41.6	3.48 H	215	33.8	12.8
4	#12770.00	35.7 AV	68.2	-32.5	3.48 H	215	22.9	12.8
5	19155.00	53.8 PK	74.0	-20.2	3.09 H	284	57.6	-3.8
6	19155.00	42.7 AV	54.0	-11.3	3.09 H	284	46.5	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	114.6 PK			1.88 V	86	108.4	6.2
2	*6385.00	103.4 AV			1.88 V	86	97.2	6.2
3	#12770.00	48.9 PK	88.2	-39.3	3.80 V	326	36.1	12.8
4	#12770.00	38.1 AV	68.2	-30.1	3.80 V	326	25.3	12.8
5	19155.00	56.0 PK	74.0	-18.0	3.36 V	166	59.8	-3.8
6	19155.00	44.6 AV	54.0	-9.4	3.36 V	166	48.4	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	98.3 PK			2.40 H	231	91.8	6.5
2	*6465.00	86.7 AV			2.40 H	231	80.2	6.5
3	#12930.00	47.6 PK	88.2	-40.6	3.53 H	219	34.5	13.1
4	#12930.00	35.9 AV	68.2	-32.3	3.53 H	219	22.8	13.1
5	19395.00	53.7 PK	74.0	-20.3	3.15 H	309	57.4	-3.7
6	19395.00	41.7 AV	54.0	-12.3	3.15 H	309	45.4	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	114.7 PK			1.87 V	86	108.2	6.5
2	*6465.00	103.9 AV			1.87 V	86	97.4	6.5
3	#12930.00	49.1 PK	88.2	-39.1	3.80 V	310	36.0	13.1
4	#12930.00	37.6 AV	68.2	-30.6	3.80 V	310	24.5	13.1
5	19395.00	55.2 PK	74.0	-18.8	3.31 V	198	58.9	-3.7
6	19395.00	44.1 AV	54.0	-9.9	3.31 V	198	47.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	91.4 PK			1.30 H	68	84.5	6.9
2	*6545.00	82.1 AV			1.30 H	68	75.2	6.9
3	#13090.00	49.1 PK	88.2	-39.1	3.17 H	240	35.9	13.2
4	#13090.00	36.0 AV	68.2	-32.2	3.17 H	240	22.8	13.2
5	19635.00	55.6 PK	74.0	-18.4	3.76 H	197	59.6	-4.0
6	19635.00	44.7 AV	54.0	-9.3	3.76 H	197	48.7	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	103.1 PK			1.43 V	124	96.2	6.9
2	*6545.00	92.4 AV			1.43 V	124	85.5	6.9
3	#13090.00	48.4 PK	88.2	-39.8	2.42 V	112	35.2	13.2
4	#13090.00	34.5 AV	68.2	-33.7	2.42 V	112	21.3	13.2
5	19635.00	56.0 PK	74.0	-18.0	2.90 V	32	60.0	-4.0
6	19635.00	43.5 AV	54.0	-10.5	2.90 V	32	47.5	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	99.2 PK			2.42 H	236	92.3	6.9
2	*6625.00	87.1 AV			2.42 H	236	80.2	6.9
3	13250.00	46.6 PK	74.0	-27.4	3.45 H	195	33.0	13.6
4	13250.00	36.0 AV	54.0	-18.0	3.45 H	195	22.4	13.6
5	19875.00	53.4 PK	74.0	-20.6	3.04 H	284	56.9	-3.5
6	19875.00	41.9 AV	54.0	-12.1	3.04 H	284	45.4	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	115.6 PK			1.86 V	88	108.7	6.9
2	*6625.00	104.6 AV			1.86 V	88	97.7	6.9
3	13250.00	48.6 PK	74.0	-25.4	3.91 V	339	35.0	13.6
4	13250.00	38.0 AV	54.0	-16.0	3.91 V	339	24.4	13.6
5	19875.00	55.1 PK	74.0	-18.9	3.39 V	182	58.6	-3.5
6	19875.00	44.4 AV	54.0	-9.6	3.39 V	182	47.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	99.5 PK			2.37 H	237	92.3	7.2
2	*6705.00	87.4 AV			2.37 H	237	80.2	7.2
3	#13410.00	45.9 PK	88.2	-42.3	3.51 H	221	31.7	14.2
4	#13410.00	35.5 AV	68.2	-32.7	3.51 H	221	21.3	14.2
5	20115.00	52.4 PK	74.0	-21.6	3.02 H	312	55.9	-3.5
6	20115.00	41.8 AV	54.0	-12.2	3.02 H	312	45.3	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	114.7 PK			1.85 V	90	107.5	7.2
2	*6705.00	103.2 AV			1.85 V	90	96.0	7.2
3	#13410.00	47.8 PK	88.2	-40.4	3.78 V	317	33.6	14.2
4	#13410.00	37.1 AV	68.2	-31.1	3.78 V	317	22.9	14.2
5	20115.00	54.6 PK	74.0	-19.4	3.45 V	183	58.1	-3.5
6	20115.00	44.2 AV	54.0	-9.8	3.45 V	183	47.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	98.5 PK			2.36 H	232	91.5	7.0
2	*6785.00	86.8 AV			2.36 H	232	79.8	7.0
3	#13570.00	45.4 PK	88.2	-42.8	3.44 H	227	30.8	14.6
4	#13570.00	35.9 AV	68.2	-32.3	3.44 H	227	21.3	14.6
5	20355.00	52.7 PK	74.0	-21.3	3.13 H	312	55.8	-3.1
6	20355.00	42.1 AV	54.0	-11.9	3.13 H	312	45.2	-3.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	114.7 PK			1.81 V	89	107.7	7.0
2	*6785.00	102.6 AV			1.81 V	89	95.6	7.0
3	#13570.00	47.6 PK	88.2	-40.6	3.97 V	327	33.0	14.6
4	#13570.00	37.7 AV	68.2	-30.5	3.97 V	327	23.1	14.6
5	20355.00	54.2 PK	74.0	-19.8	3.32 V	177	57.3	-3.1
6	20355.00	44.4 AV	54.0	-9.6	3.32 V	177	47.5	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	91.5 PK			1.36 H	66	84.3	7.2
2	*6865.00	81.0 AV			1.36 H	66	73.8	7.2
3	#13730.00	49.0 PK	88.2	-39.2	3.48 H	234	33.9	15.1
4	#13730.00	35.6 AV	68.2	-32.6	3.48 H	234	20.5	15.1
5	20595.00	56.0 PK	74.0	-18.0	3.44 H	197	59.3	-3.3
6	20595.00	44.3 AV	54.0	-9.7	3.44 H	197	47.6	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	102.3 PK			1.23 V	144	95.1	7.2
2	*6865.00	91.9 AV			1.23 V	144	84.7	7.2
3	#13730.00	48.8 PK	88.2	-39.4	2.44 V	109	33.7	15.1
4	#13730.00	35.3 AV	68.2	-32.9	2.44 V	109	20.2	15.1
5	20595.00	56.5 PK	74.0	-17.5	2.66 V	39	59.8	-3.3
6	20595.00	44.7 AV	54.0	-9.3	2.66 V	39	48.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	91.5 PK			1.33 H	79	84.0	7.5
2	*6945.00	81.6 AV			1.33 H	79	74.1	7.5
3	#13890.00	48.7 PK	88.2	-39.5	3.24 H	249	33.5	15.2
4	#13890.00	34.5 AV	68.2	-33.7	3.24 H	249	19.3	15.2
5	20835.00	55.7 PK	74.0	-18.3	3.46 H	207	58.6	-2.9
6	20835.00	45.2 AV	54.0	-8.8	3.46 H	207	48.1	-2.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	102.5 PK			1.37 V	142	95.0	7.5
2	*6945.00	92.2 AV			1.37 V	142	84.7	7.5
3	#13890.00	47.8 PK	88.2	-40.4	2.40 V	73	32.6	15.2
4	#13890.00	36.0 AV	68.2	-32.2	2.40 V	73	20.8	15.2
5	20835.00	55.9 PK	74.0	-18.1	2.80 V	28	58.8	-2.9
6	20835.00	44.1 AV	54.0	-9.9	2.80 V	28	47.0	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	92.6 PK			1.50 H	194	84.2	8.4
2	*7025.00	80.3 AV			1.50 H	194	71.9	8.4
3	#7125.00	56.0 PK	88.2	-32.2	1.50 H	194	46.6	9.4
4	#7125.00	44.1 AV	68.2	-24.1	1.50 H	194	34.7	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.50 H	194	46.5	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.50 H	194	34.8	8.7
7	#14050.00	47.9 PK	88.2	-40.3	3.30 H	240	32.4	15.5
8	#14050.00	34.7 AV	68.2	-33.5	3.30 H	240	19.2	15.5
9	21075.00	56.0 PK	74.0	-18.0	3.61 H	230	58.2	-2.2
10	21075.00	45.0 AV	54.0	-9.0	3.61 H	230	47.2	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.2 PK			1.47 V	85	93.8	8.4
2	*7025.00	91.0 AV			1.47 V	85	82.6	8.4
3	#7125.00	55.5 PK	88.2	-32.7	1.47 V	85	46.1	9.4
4	#7125.00	44.6 AV	68.2	-23.6	1.47 V	85	35.2	9.4
5	7250.00	54.8 PK	74.0	-19.2	1.47 V	85	46.1	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.47 V	85	34.9	8.7
7	#14050.00	49.2 PK	88.2	-39.0	2.62 V	79	33.7	15.5
8	#14050.00	34.5 AV	68.2	-33.7	2.62 V	79	19.0	15.5
9	21075.00	55.0 PK	74.0	-19.0	2.82 V	40	57.2	-2.2
10	21075.00	44.4 AV	54.0	-9.6	2.82 V	40	46.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.6 PK	88.2	-22.6	1.00 H	0	61.3	4.3
2	#5925.00	52.5 AV	68.2	-15.7	1.00 H	0	48.2	4.3
3	*6025.00	95.1 PK			2.54 H	255	90.9	4.2
4	*6025.00	83.4 AV			2.54 H	255	79.2	4.2
5	12050.00	45.5 PK	74.0	-28.5	3.54 H	207	33.1	12.4
6	12050.00	33.2 AV	54.0	-20.8	3.54 H	207	20.8	12.4
7	18075.00	53.2 PK	74.0	-20.8	2.84 H	295	57.9	-4.7
8	18075.00	42.2 AV	54.0	-11.8	2.84 H	295	46.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.0 PK	88.2	-10.2	1.79 V	268	73.7	4.3
2	#5925.00	65.3 AV	68.2	-2.9	1.79 V	268	61.0	4.3
3	*6025.00	109.1 PK			1.79 V	268	104.9	4.2
4	*6025.00	96.8 AV			1.79 V	268	92.6	4.2
5	12050.00	47.3 PK	74.0	-26.7	3.93 V	319	34.9	12.4
6	12050.00	35.2 AV	54.0	-18.8	3.93 V	319	22.8	12.4
7	18075.00	54.8 PK	74.0	-19.2	3.16 V	167	59.5	-4.7
8	18075.00	44.5 AV	54.0	-9.5	3.16 V	167	49.2	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	97.6 PK			2.54 H	255	92.8	4.8
2	*6185.00	86.3 AV			2.54 H	255	81.5	4.8
3	12370.00	46.2 PK	74.0	-27.8	3.35 H	198	33.9	12.3
4	12370.00	34.5 AV	54.0	-19.5	3.35 H	198	22.2	12.3
5	18555.00	53.2 PK	74.0	-20.8	2.96 H	311	58.1	-4.9
6	18555.00	42.8 AV	54.0	-11.2	2.96 H	311	47.7	-4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.1 PK			1.78 V	274	106.3	4.8
2	*6185.00	99.6 AV			1.78 V	274	94.8	4.8
3	12370.00	48.2 PK	74.0	-25.8	3.78 V	340	35.9	12.3
4	12370.00	36.4 AV	54.0	-17.6	3.78 V	340	24.1	12.3
5	18555.00	55.2 PK	74.0	-18.8	3.11 V	179	60.1	-4.9
6	18555.00	44.6 AV	54.0	-9.4	3.11 V	179	49.5	-4.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	97.2 PK			2.52 H	263	91.1	6.1
2	*6345.00	86.0 AV			2.52 H	263	79.9	6.1
3	12690.00	45.8 PK	74.0	-28.2	3.48 H	215	32.9	12.9
4	12690.00	35.1 AV	54.0	-18.9	3.48 H	215	22.2	12.9
5	19035.00	52.8 PK	74.0	-21.2	3.06 H	318	56.7	-3.9
6	19035.00	42.0 AV	54.0	-12.0	3.06 H	318	45.9	-3.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.2 PK			1.78 V	86	105.1	6.1
2	*6345.00	100.2 AV			1.78 V	86	94.1	6.1
3	12690.00	47.8 PK	74.0	-26.2	3.79 V	319	34.9	12.9
4	12690.00	37.5 AV	54.0	-16.5	3.79 V	319	24.6	12.9
5	19035.00	55.0 PK	74.0	-19.0	3.20 V	180	58.9	-3.9
6	19035.00	44.1 AV	54.0	-9.9	3.20 V	180	48.0	-3.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	96.5 PK			2.57 H	269	89.7	6.8
2	*6505.00	86.8 AV			2.57 H	269	80.0	6.8
3	#13010.00	45.5 PK	88.2	-42.7	3.51 H	227	32.3	13.2
4	#13010.00	34.1 AV	68.2	-34.1	3.51 H	227	20.9	13.2
5	19515.00	53.8 PK	74.0	-20.2	2.87 H	321	57.9	-4.1
6	19515.00	42.7 AV	54.0	-11.3	2.87 H	321	46.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.3 PK			1.82 V	89	105.5	6.8
2	*6505.00	101.3 AV			1.82 V	89	94.5	6.8
3	#13010.00	47.5 PK	88.2	-40.7	3.92 V	338	34.3	13.2
4	#13010.00	36.4 AV	68.2	-31.8	3.92 V	338	23.2	13.2
5	19515.00	55.6 PK	74.0	-18.4	3.14 V	165	59.7	-4.1
6	19515.00	44.3 AV	54.0	-9.7	3.14 V	165	48.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	96.0 PK			2.56 H	247	88.8	7.2
2	*6665.00	86.5 AV			2.56 H	247	79.3	7.2
3	13330.00	45.3 PK	74.0	-28.7	3.47 H	226	31.5	13.8
4	13330.00	34.6 AV	54.0	-19.4	3.47 H	226	20.8	13.8
5	19995.00	51.9 PK	74.0	-22.1	3.10 H	288	55.5	-3.6
6	19995.00	41.7 AV	54.0	-12.3	3.10 H	288	45.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.5 PK			1.77 V	99	106.3	7.2
2	*6665.00	102.2 AV			1.77 V	99	95.0	7.2
3	13330.00	46.9 PK	74.0	-27.1	3.95 V	311	33.1	13.8
4	13330.00	36.1 AV	54.0	-17.9	3.95 V	311	22.3	13.8
5	19995.00	54.2 PK	74.0	-19.8	3.36 V	169	57.8	-3.6
6	19995.00	43.8 AV	54.0	-10.2	3.36 V	169	47.4	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	91.4 PK			1.49 H	88	84.3	7.1
2	*6825.00	79.9 AV			1.49 H	88	72.8	7.1
3	#13650.00	47.9 PK	88.2	-40.3	3.20 H	260	33.0	14.9
4	#13650.00	36.3 AV	68.2	-31.9	3.20 H	260	21.4	14.9
5	20475.00	56.3 PK	74.0	-17.7	3.75 H	204	59.5	-3.2
6	20475.00	44.6 AV	54.0	-9.4	3.75 H	204	47.8	-3.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	101.7 PK			1.20 V	143	94.6	7.1
2	*6825.00	91.3 AV			1.20 V	143	84.2	7.1
3	#13650.00	48.1 PK	88.2	-40.1	2.31 V	99	33.2	14.9
4	#13650.00	35.7 AV	68.2	-32.5	2.31 V	99	20.8	14.9
5	20475.00	56.8 PK	74.0	-17.2	2.74 V	14	60.0	-3.2
6	20475.00	44.0 AV	54.0	-10.0	2.74 V	14	47.2	-3.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	91.2 PK			1.08 H	69	83.4	7.8
2	*6985.00	80.4 AV			1.08 H	69	72.6	7.8
3	#7125.00	56.9 PK	88.2	-31.3	1.08 H	69	47.5	9.4
4	#7125.00	45.0 AV	68.2	-23.2	1.08 H	69	35.6	9.4
5	7250.00	55.2 PK	74.0	-18.8	1.08 H	69	46.5	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.08 H	69	34.7	8.7
7	#13970.00	47.9 PK	88.2	-40.3	3.38 H	261	32.4	15.5
8	#13970.00	35.3 AV	68.2	-32.9	3.38 H	261	19.8	15.5
9	20955.00	55.4 PK	74.0	-18.6	3.74 H	211	58.1	-2.7
10	20955.00	44.7 AV	54.0	-9.3	3.74 H	211	47.4	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.4 PK			1.78 V	54	94.6	7.8
2	*6985.00	91.8 AV			1.78 V	54	84.0	7.8
3	#7125.00	62.6 PK	88.2	-25.6	1.78 V	54	53.2	9.4
4	#7125.00	50.7 AV	68.2	-17.5	1.78 V	54	41.3	9.4
5	7250.00	56.2 PK	74.0	-17.8	1.78 V	54	47.5	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.78 V	54	34.8	8.7
7	#13970.00	47.9 PK	88.2	-40.3	2.33 V	86	32.4	15.5
8	#13970.00	36.2 AV	68.2	-32.0	2.33 V	86	20.7	15.5
9	20955.00	56.4 PK	74.0	-17.6	2.66 V	20	59.1	-2.7
10	20955.00	44.3 AV	54.0	-9.7	2.66 V	20	47.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.0 PK	88.2	-25.2	2.49 H	218	58.7	4.3
2	#5925.00	43.7 AV	68.2	-24.5	2.49 H	218	39.4	4.3
3	*5955.00	112.1 PK			2.49 H	218	107.6	4.5
4	*5955.00	102.2 AV			2.49 H	218	97.7	4.5
5	11910.00	53.2 PK	74.0	-20.8	3.50 H	224	41.0	12.2
6	11910.00	45.1 AV	54.0	-8.9	3.50 H	224	32.9	12.2
7	17865.00	57.0 PK	74.0	-17.0	3.09 H	300	35.1	21.9
8	17865.00	44.2 AV	54.0	-9.8	3.09 H	300	22.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.9 PK	88.2	-8.3	1.73 V	88	75.6	4.3
2	#5925.00	56.1 AV	68.2	-12.1	1.73 V	88	51.8	4.3
3	*5955.00	122.9 PK			1.73 V	88	118.4	4.5
4	*5955.00	114.5 AV			1.73 V	88	110.0	4.5
5	11910.00	55.6 PK	74.0	-18.4	3.36 V	147	43.4	12.2
6	11910.00	46.7 AV	54.0	-7.3	3.36 V	147	34.5	12.2
7	17865.00	58.7 PK	74.0	-15.3	3.28 V	341	36.8	21.9
8	17865.00	46.4 AV	54.0	-7.6	3.28 V	341	24.5	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	111.7 PK			2.53 H	217	106.9	4.8
2	*6195.00	101.9 AV			2.53 H	217	97.1	4.8
3	12390.00	53.1 PK	74.0	-20.9	3.33 H	194	40.8	12.3
4	12390.00	45.5 AV	54.0	-8.5	3.33 H	194	33.2	12.3
5	18585.00	56.3 PK	74.0	-17.7	3.09 H	284	61.3	-5.0
6	18585.00	44.7 AV	54.0	-9.3	3.09 H	284	49.7	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	123.0 PK			1.70 V	78	118.2	4.8
2	*6195.00	114.3 AV			1.70 V	78	109.5	4.8
3	12390.00	55.3 PK	74.0	-18.7	3.90 V	347	43.0	12.3
4	12390.00	47.5 AV	54.0	-6.5	3.90 V	347	35.2	12.3
5	18585.00	58.3 PK	74.0	-15.7	3.15 V	179	63.3	-5.0
6	18585.00	46.7 AV	54.0	-7.3	3.15 V	179	51.7	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	112.5 PK			2.54 H	217	106.1	6.4
2	*6415.00	102.4 AV			2.54 H	217	96.0	6.4
3	#12830.00	54.1 PK	88.2	-34.1	3.42 H	214	41.1	13.0
4	#12830.00	44.1 AV	68.2	-24.1	3.42 H	214	31.1	13.0
5	19245.00	55.8 PK	74.0	-18.2	3.13 H	312	59.6	-3.8
6	19245.00	44.3 AV	54.0	-9.7	3.13 H	312	48.1	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	122.4 PK			1.79 V	99	116.0	6.4
2	*6415.00	114.0 AV			1.79 V	99	107.6	6.4
3	#12830.00	55.7 PK	88.2	-32.5	3.76 V	329	42.7	13.0
4	#12830.00	46.6 AV	68.2	-21.6	3.76 V	329	33.6	13.0
5	19245.00	57.7 PK	74.0	-16.3	3.39 V	172	61.5	-3.8
6	19245.00	46.3 AV	54.0	-7.7	3.39 V	172	50.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	94.1 PK			1.33 H	95	87.7	6.4
2	*6435.00	82.0 AV			1.33 H	95	75.6	6.4
3	#12870.00	47.7 PK	88.2	-40.5	3.45 H	254	34.7	13.0
4	#12870.00	35.0 AV	68.2	-33.2	3.45 H	254	22.0	13.0
5	19305.00	55.5 PK	74.0	-18.5	3.58 H	213	59.2	-3.7
6	19305.00	45.0 AV	54.0	-9.0	3.58 H	213	48.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.1 PK			1.30 V	137	97.7	6.4
2	*6435.00	92.1 AV			1.30 V	137	85.7	6.4
3	#12870.00	48.9 PK	88.2	-39.3	2.32 V	97	35.9	13.0
4	#12870.00	34.7 AV	68.2	-33.5	2.32 V	97	21.7	13.0
5	19305.00	56.4 PK	74.0	-17.6	2.65 V	27	60.1	-3.7
6	19305.00	45.1 AV	54.0	-8.9	2.65 V	27	48.8	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	111.7 PK			2.44 H	232	105.1	6.6
2	*6475.00	101.8 AV			2.44 H	232	95.2	6.6
3	#12950.00	53.4 PK	88.2	-34.8	3.42 H	200	40.3	13.1
4	#12950.00	44.4 AV	68.2	-23.8	3.42 H	200	31.3	13.1
5	19425.00	56.7 PK	74.0	-17.3	3.14 H	310	60.5	-3.8
6	19425.00	44.5 AV	54.0	-9.5	3.14 H	310	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	123.4 PK			1.73 V	81	116.8	6.6
2	*6475.00	114.9 AV			1.73 V	81	108.3	6.6
3	#12950.00	55.7 PK	88.2	-32.5	3.94 V	322	42.6	13.1
4	#12950.00	46.6 AV	68.2	-21.6	3.94 V	322	33.5	13.1
5	19425.00	58.4 PK	74.0	-15.6	3.13 V	193	62.2	-3.8
6	19425.00	46.1 AV	54.0	-7.9	3.13 V	193	49.9	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	92.3 PK			1.30 H	76	85.4	6.9
2	*6515.00	81.2 AV			1.30 H	76	74.3	6.9
3	#13030.00	47.6 PK	88.2	-40.6	3.49 H	255	34.4	13.2
4	#13030.00	36.3 AV	68.2	-31.9	3.49 H	255	23.1	13.2
5	19545.00	56.5 PK	74.0	-17.5	3.68 H	198	60.6	-4.1
6	19545.00	45.1 AV	54.0	-8.9	3.68 H	198	49.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.2 PK			1.23 V	123	96.3	6.9
2	*6515.00	92.2 AV			1.23 V	123	85.3	6.9
3	#13030.00	49.3 PK	88.2	-38.9	2.65 V	87	36.1	13.2
4	#13030.00	35.6 AV	68.2	-32.6	2.65 V	87	22.4	13.2
5	19545.00	55.4 PK	74.0	-18.6	2.69 V	22	59.5	-4.1
6	19545.00	44.3 AV	54.0	-9.7	2.69 V	22	48.4	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.6 PK			2.45 H	211	105.7	6.9
2	*6535.00	102.6 AV			2.45 H	211	95.7	6.9
3	#13070.00	53.4 PK	88.2	-34.8	3.50 H	190	40.2	13.2
4	#13070.00	45.2 AV	68.2	-23.0	3.50 H	190	32.0	13.2
5	19605.00	55.5 PK	74.0	-18.5	3.08 H	297	59.5	-4.0
6	19605.00	44.4 AV	54.0	-9.6	3.08 H	297	48.4	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	123.6 PK			1.75 V	89	116.7	6.9
2	*6535.00	115.0 AV			1.75 V	89	108.1	6.9
3	#13070.00	55.3 PK	88.2	-32.9	3.72 V	332	42.1	13.2
4	#13070.00	46.7 AV	68.2	-21.5	3.72 V	332	33.5	13.2
5	19605.00	57.9 PK	74.0	-16.1	3.19 V	175	61.9	-4.0
6	19605.00	46.4 AV	54.0	-7.6	3.19 V	175	50.4	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	111.5 PK			2.54 H	222	104.3	7.2
2	*6695.00	101.7 AV			2.54 H	222	94.5	7.2
3	13390.00	51.8 PK	74.0	-22.2	3.45 H	208	37.8	14.0
4	13390.00	44.2 AV	54.0	-9.8	3.45 H	208	30.2	14.0
5	20085.00	54.8 PK	74.0	-19.2	2.97 H	320	58.3	-3.5
6	20085.00	43.5 AV	54.0	-10.5	2.97 H	320	47.0	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	123.0 PK			1.69 V	92	115.8	7.2
2	*6695.00	114.5 AV			1.69 V	92	107.3	7.2
3	13390.00	54.2 PK	74.0	-19.8	3.81 V	337	40.2	14.0
4	13390.00	46.3 AV	54.0	-7.7	3.81 V	337	32.3	14.0
5	20085.00	56.7 PK	74.0	-17.3	3.26 V	167	60.2	-3.5
6	20085.00	45.8 AV	54.0	-8.2	3.26 V	167	49.3	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.6 PK			2.54 H	206	103.4	7.2
2	*6855.00	100.0 AV			2.54 H	206	92.8	7.2
3	#13710.00	52.6 PK	88.2	-35.6	3.31 H	210	37.4	15.2
4	#13710.00	43.7 AV	68.2	-24.5	3.31 H	210	28.5	15.2
5	20565.00	54.6 PK	74.0	-19.4	2.91 H	304	57.9	-3.3
6	20565.00	44.0 AV	54.0	-10.0	2.91 H	304	47.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	122.4 PK			1.75 V	100	115.2	7.2
2	*6855.00	114.1 AV			1.75 V	100	106.9	7.2
3	#13710.00	54.2 PK	88.2	-34.0	3.74 V	346	39.0	15.2
4	#13710.00	45.4 AV	68.2	-22.8	3.74 V	346	30.2	15.2
5	20565.00	56.2 PK	74.0	-17.8	3.37 V	193	59.5	-3.3
6	20565.00	45.9 AV	54.0	-8.1	3.37 V	193	49.2	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	92.0 PK			1.56 H	69	84.8	7.2
2	*6875.00	80.9 AV			1.56 H	69	73.7	7.2
3	#13750.00	47.6 PK	88.2	-40.6	3.27 H	237	32.5	15.1
4	#13750.00	34.4 AV	68.2	-33.8	3.27 H	237	19.3	15.1
5	20625.00	55.7 PK	74.0	-18.3	3.47 H	226	59.0	-3.3
6	20625.00	44.5 AV	54.0	-9.5	3.47 H	226	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.5 PK			1.20 V	142	95.3	7.2
2	*6875.00	91.7 AV			1.20 V	142	84.5	7.2
3	#13750.00	48.2 PK	88.2	-40.0	2.59 V	103	33.1	15.1
4	#13750.00	35.6 AV	68.2	-32.6	2.59 V	103	20.5	15.1
5	20625.00	56.8 PK	74.0	-17.2	2.69 V	15	60.1	-3.3
6	20625.00	43.7 AV	54.0	-10.3	2.69 V	15	47.0	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	90.9 PK			1.38 H	79	82.9	8.0
2	*6995.00	80.4 AV			1.38 H	79	72.4	8.0
3	#13990.00	49.3 PK	88.2	-38.9	3.26 H	229	33.7	15.6
4	#13990.00	34.9 AV	68.2	-33.3	3.26 H	229	19.3	15.6
5	20985.00	55.3 PK	74.0	-18.7	3.63 H	202	58.1	-2.8
6	20985.00	44.0 AV	54.0	-10.0	3.63 H	202	46.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.6 PK			1.35 V	135	94.6	8.0
2	*6995.00	91.6 AV			1.35 V	135	83.6	8.0
3	#13990.00	49.1 PK	88.2	-39.1	2.37 V	94	33.5	15.6
4	#13990.00	34.8 AV	68.2	-33.4	2.37 V	94	19.2	15.6
5	20985.00	56.2 PK	74.0	-17.8	3.00 V	48	59.0	-2.8
6	20985.00	44.0 AV	54.0	-10.0	3.00 V	48	46.8	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.8 PK			1.41 H	272	83.3	9.5
2	*7115.00	81.4 AV			1.41 H	272	71.9	9.5
3	#7125.00	77.6 PK	88.2	-10.6	1.41 H	272	68.2	9.4
4	#7125.00	48.4 AV	68.2	-19.8	1.41 H	272	39.0	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.41 H	272	46.8	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.41 H	272	34.8	8.7
7	#14230.00	49.2 PK	88.2	-39.0	3.50 H	263	33.9	15.3
8	#14230.00	35.7 AV	68.2	-32.5	3.50 H	263	20.4	15.3
9	21345.00	56.3 PK	74.0	-17.7	3.62 H	216	57.9	-1.6
10	21345.00	45.1 AV	54.0	-8.9	3.62 H	216	46.7	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.5 PK			1.70 V	84	93.0	9.5
2	*7115.00	90.4 AV			1.70 V	84	80.9	9.5
3	#7125.00	86.4 PK	88.2	-1.8	1.70 V	84	77.0	9.4
4	#7125.00	56.4 AV	68.2	-11.8	1.70 V	84	47.0	9.4
5	7250.00	55.9 PK	74.0	-18.1	1.70 V	84	47.2	8.7
6	7250.00	43.7 AV	54.0	-10.3	1.70 V	84	35.0	8.7
7	#14230.00	48.2 PK	88.2	-40.0	2.31 V	98	32.9	15.3
8	#14230.00	35.0 AV	68.2	-33.2	2.31 V	98	19.7	15.3
9	21345.00	56.1 PK	74.0	-17.9	2.73 V	51	57.7	-1.6
10	21345.00	45.4 AV	54.0	-8.6	2.73 V	51	47.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	2.48 H	241	58.9	4.3
2	#5925.00	45.8 AV	68.2	-22.4	2.48 H	241	41.5	4.3
3	*5955.00	109.7 PK			2.48 H	241	105.2	4.5
4	*5955.00	100.8 AV			2.48 H	241	96.3	4.5
5	11910.00	52.6 PK	74.0	-21.4	3.42 H	205	40.4	12.2
6	11910.00	44.2 AV	54.0	-9.8	3.42 H	205	32.0	12.2
7	17865.00	54.7 PK	74.0	-19.3	2.80 H	299	32.8	21.9
8	17865.00	44.0 AV	54.0	-10.0	2.80 H	299	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.9 PK	88.2	-8.3	1.00 V	0	75.6	4.3
2	#5925.00	60.8 AV	68.2	-7.4	1.00 V	0	56.5	4.3
3	*5955.00	121.7 PK			1.70 V	85	117.2	4.5
4	*5955.00	112.0 AV			1.70 V	85	107.5	4.5
5	11910.00	54.6 PK	74.0	-19.4	3.78 V	332	42.4	12.2
6	11910.00	46.5 AV	54.0	-7.5	3.78 V	332	34.3	12.2
7	17865.00	57.2 PK	74.0	-16.8	3.10 V	196	35.3	21.9
8	17865.00	45.6 AV	54.0	-8.4	3.10 V	196	23.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	109.9 PK			2.47 H	249	105.1	4.8
2	*6195.00	100.8 AV			2.47 H	249	96.0	4.8
3	12390.00	53.1 PK	74.0	-20.9	3.31 H	192	40.8	12.3
4	12390.00	43.8 AV	54.0	-10.2	3.31 H	192	31.5	12.3
5	18585.00	55.4 PK	74.0	-18.6	2.98 H	284	60.4	-5.0
6	18585.00	43.4 AV	54.0	-10.6	2.98 H	284	48.4	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	121.9 PK			1.70 V	84	117.1	4.8
2	*6195.00	112.2 AV			1.70 V	84	107.4	4.8
3	12390.00	54.9 PK	74.0	-19.1	3.74 V	330	42.6	12.3
4	12390.00	46.0 AV	54.0	-8.0	3.74 V	330	33.7	12.3
5	18585.00	57.6 PK	74.0	-16.4	3.40 V	175	62.6	-5.0
6	18585.00	45.9 AV	54.0	-8.1	3.40 V	175	50.9	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	109.4 PK			2.47 H	230	103.0	6.4
2	*6415.00	100.6 AV			2.47 H	230	94.2	6.4
3	#12830.00	52.6 PK	88.2	-35.6	3.49 H	217	39.6	13.0
4	#12830.00	43.8 AV	68.2	-24.4	3.49 H	217	30.8	13.0
5	19245.00	54.7 PK	74.0	-19.3	2.95 H	313	58.5	-3.8
6	19245.00	43.4 AV	54.0	-10.6	2.95 H	313	47.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	121.9 PK			1.69 V	72	115.5	6.4
2	*6415.00	112.2 AV			1.69 V	72	105.8	6.4
3	#12830.00	54.4 PK	88.2	-33.8	3.94 V	348	41.4	13.0
4	#12830.00	45.6 AV	68.2	-22.6	3.94 V	348	32.6	13.0
5	19245.00	56.6 PK	74.0	-17.4	3.10 V	191	60.4	-3.8
6	19245.00	45.8 AV	54.0	-8.2	3.10 V	191	49.6	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.6 PK			1.29 H	74	87.2	6.4
2	*6435.00	81.2 AV			1.29 H	74	74.8	6.4
3	#12870.00	47.9 PK	88.2	-40.3	3.50 H	263	34.9	13.0
4	#12870.00	35.6 AV	68.2	-32.6	3.50 H	263	22.6	13.0
5	19305.00	56.0 PK	74.0	-18.0	3.67 H	234	59.7	-3.7
6	19305.00	44.8 AV	54.0	-9.2	3.67 H	234	48.5	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	103.9 PK			1.16 V	141	97.5	6.4
2	*6435.00	92.5 AV			1.16 V	141	86.1	6.4
3	#12870.00	48.6 PK	88.2	-39.6	2.34 V	83	35.6	13.0
4	#12870.00	35.5 AV	68.2	-32.7	2.34 V	83	22.5	13.0
5	19305.00	54.9 PK	74.0	-19.1	2.75 V	19	58.6	-3.7
6	19305.00	45.0 AV	54.0	-9.0	2.75 V	19	48.7	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.4 PK			2.43 H	230	102.8	6.6
2	*6475.00	100.7 AV			2.43 H	230	94.1	6.6
3	#12950.00	51.9 PK	88.2	-36.3	3.51 H	201	38.8	13.1
4	#12950.00	44.1 AV	68.2	-24.1	3.51 H	201	31.0	13.1
5	19425.00	54.9 PK	74.0	-19.1	3.07 H	312	58.7	-3.8
6	19425.00	43.6 AV	54.0	-10.4	3.07 H	312	47.4	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	121.2 PK			1.72 V	86	114.6	6.6
2	*6475.00	111.7 AV			1.72 V	86	105.1	6.6
3	#12950.00	54.0 PK	88.2	-34.2	3.71 V	311	40.9	13.1
4	#12950.00	45.7 AV	68.2	-22.5	3.71 V	311	32.6	13.1
5	19425.00	56.8 PK	74.0	-17.2	3.39 V	201	60.6	-3.8
6	19425.00	45.2 AV	54.0	-8.8	3.39 V	201	49.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.9 PK			1.26 H	82	85.0	6.9
2	*6515.00	81.7 AV			1.26 H	82	74.8	6.9
3	#13030.00	48.1 PK	88.2	-40.1	3.20 H	257	34.9	13.2
4	#13030.00	34.8 AV	68.2	-33.4	3.20 H	257	21.6	13.2
5	19545.00	56.6 PK	74.0	-17.4	3.45 H	223	60.7	-4.1
6	19545.00	44.8 AV	54.0	-9.2	3.45 H	223	48.9	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.3 PK			1.44 V	134	96.4	6.9
2	*6515.00	92.1 AV			1.44 V	134	85.2	6.9
3	#13030.00	48.1 PK	88.2	-40.1	2.47 V	106	34.9	13.2
4	#13030.00	35.6 AV	68.2	-32.6	2.47 V	106	22.4	13.2
5	19545.00	56.1 PK	74.0	-17.9	2.89 V	50	60.2	-4.1
6	19545.00	44.1 AV	54.0	-9.9	2.89 V	50	48.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.3 PK			2.46 H	231	102.4	6.9
2	*6535.00	100.5 AV			2.46 H	231	93.6	6.9
3	#13070.00	52.2 PK	88.2	-36.0	3.44 H	224	39.0	13.2
4	#13070.00	43.5 AV	68.2	-24.7	3.44 H	224	30.3	13.2
5	19605.00	55.4 PK	74.0	-18.6	2.81 H	290	59.4	-4.0
6	19605.00	44.1 AV	54.0	-9.9	2.81 H	290	48.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	121.6 PK			1.66 V	86	114.7	6.9
2	*6535.00	112.0 AV			1.66 V	86	105.1	6.9
3	#13070.00	54.5 PK	88.2	-33.7	3.97 V	341	41.3	13.2
4	#13070.00	46.0 AV	68.2	-22.2	3.97 V	341	32.8	13.2
5	19605.00	57.5 PK	74.0	-16.5	3.07 V	163	61.5	-4.0
6	19605.00	46.0 AV	54.0	-8.0	3.07 V	163	50.0	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.6 PK			2.42 H	243	101.4	7.2
2	*6695.00	99.8 AV			2.42 H	243	92.6	7.2
3	13390.00	51.7 PK	74.0	-22.3	3.35 H	209	37.7	14.0
4	13390.00	43.9 AV	54.0	-10.1	3.35 H	209	29.9	14.0
5	20085.00	56.0 PK	74.0	-18.0	2.86 H	287	59.5	-3.5
6	20085.00	44.6 AV	54.0	-9.4	2.86 H	287	48.1	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	121.0 PK			1.68 V	99	113.8	7.2
2	*6695.00	111.5 AV			1.68 V	99	104.3	7.2
3	13390.00	54.1 PK	74.0	-19.9	3.91 V	329	40.1	14.0
4	13390.00	45.9 AV	54.0	-8.1	3.91 V	329	31.9	14.0
5	20085.00	56.6 PK	74.0	-17.4	3.28 V	186	60.1	-3.5
6	20085.00	45.0 AV	54.0	-9.0	3.28 V	186	48.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	108.2 PK			2.53 H	242	101.0	7.2
2	*6855.00	99.3 AV			2.53 H	242	92.1	7.2
3	#13710.00	51.6 PK	88.2	-36.6	3.43 H	211	36.4	15.2
4	#13710.00	42.4 AV	68.2	-25.8	3.43 H	211	27.2	15.2
5	20565.00	56.4 PK	74.0	-17.6	3.00 H	284	59.7	-3.3
6	20565.00	44.1 AV	54.0	-9.9	3.00 H	284	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	120.6 PK			1.67 V	93	113.4	7.2
2	*6855.00	111.2 AV			1.67 V	93	104.0	7.2
3	#13710.00	53.3 PK	88.2	-34.9	3.84 V	319	38.1	15.2
4	#13710.00	44.7 AV	68.2	-23.5	3.84 V	319	29.5	15.2
5	20565.00	56.2 PK	74.0	-17.8	3.24 V	190	59.5	-3.3
6	20565.00	44.2 AV	54.0	-9.8	3.24 V	190	47.5	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	90.5 PK			1.30 H	92	83.3	7.2
2	*6875.00	81.1 AV			1.30 H	92	73.9	7.2
3	#13750.00	48.6 PK	88.2	-39.6	3.52 H	261	33.5	15.1
4	#13750.00	35.6 AV	68.2	-32.6	3.52 H	261	20.5	15.1
5	20625.00	54.9 PK	74.0	-19.1	3.56 H	208	58.2	-3.3
6	20625.00	44.5 AV	54.0	-9.5	3.56 H	208	47.8	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.4 PK			1.17 V	137	95.2	7.2
2	*6875.00	91.8 AV			1.17 V	137	84.6	7.2
3	#13750.00	48.0 PK	88.2	-40.2	2.51 V	105	32.9	15.1
4	#13750.00	35.8 AV	68.2	-32.4	2.51 V	105	20.7	15.1
5	20625.00	56.0 PK	74.0	-18.0	2.66 V	40	59.3	-3.3
6	20625.00	44.5 AV	54.0	-9.5	2.66 V	40	47.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	91.6 PK			1.33 H	79	83.6	8.0
2	*6995.00	81.1 AV			1.33 H	79	73.1	8.0
3	#13990.00	48.6 PK	88.2	-39.6	3.54 H	232	33.0	15.6
4	#13990.00	36.2 AV	68.2	-32.0	3.54 H	232	20.6	15.6
5	20985.00	56.2 PK	74.0	-17.8	3.65 H	224	59.0	-2.8
6	20985.00	44.6 AV	54.0	-9.4	3.65 H	224	47.4	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.2 PK			1.20 V	116	95.2	8.0
2	*6995.00	92.0 AV			1.20 V	116	84.0	8.0
3	#13990.00	48.4 PK	88.2	-39.8	2.58 V	105	32.8	15.6
4	#13990.00	34.6 AV	68.2	-33.6	2.58 V	105	19.0	15.6
5	20985.00	55.9 PK	74.0	-18.1	2.86 V	23	58.7	-2.8
6	20985.00	44.2 AV	54.0	-9.8	2.86 V	23	47.0	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.1 PK			1.34 H	272	81.6	9.5
2	*7115.00	80.5 AV			1.34 H	272	71.0	9.5
3	#7125.00	78.0 PK	88.2	-10.2	1.34 H	272	68.6	9.4
4	#7125.00	49.4 AV	68.2	-18.8	1.34 H	272	40.0	9.4
5	7250.00	56.0 PK	74.0	-18.0	1.34 H	272	47.3	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.34 H	272	34.9	8.7
7	#14230.00	49.3 PK	88.2	-38.9	3.39 H	239	34.0	15.3
8	#14230.00	34.5 AV	68.2	-33.7	3.39 H	239	19.2	15.3
9	21345.00	56.5 PK	74.0	-17.5	3.49 H	202	58.1	-1.6
10	21345.00	43.9 AV	54.0	-10.1	3.49 H	202	45.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	100.7 PK			1.63 V	267	91.2	9.5
2	*7115.00	89.5 AV			1.63 V	267	80.0	9.5
3	#7125.00	86.5 PK	88.2	-1.7	1.63 V	267	77.1	9.4
4	#7125.00	56.5 AV	68.2	-11.7	1.63 V	267	47.1	9.4
5	7250.00	55.5 PK	74.0	-18.5	1.63 V	267	46.8	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.63 V	267	34.6	8.7
7	#14230.00	48.5 PK	88.2	-39.7	2.43 V	111	33.2	15.3
8	#14230.00	34.9 AV	68.2	-33.3	2.43 V	111	19.6	15.3
9	21345.00	56.5 PK	74.0	-17.5	2.82 V	16	58.1	-1.6
10	21345.00	44.8 AV	54.0	-9.2	2.82 V	16	46.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.3 PK	88.2	-25.9	2.49 H	241	58.0	4.3
2	#5925.00	44.2 AV	68.2	-24.0	2.49 H	241	39.9	4.3
3	*5955.00	108.3 PK			2.49 H	241	103.8	4.5
4	*5955.00	97.6 AV			2.49 H	241	93.1	4.5
5	11910.00	51.3 PK	74.0	-22.7	3.31 H	226	39.1	12.2
6	11910.00	41.9 AV	54.0	-12.1	3.31 H	226	29.7	12.2
7	17865.00	55.7 PK	74.0	-18.3	3.06 H	292	33.8	21.9
8	17865.00	44.0 AV	54.0	-10.0	3.06 H	292	22.1	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	76.4 PK	88.2	-11.8	1.70 V	75	72.1	4.3
2	#5925.00	58.5 AV	68.2	-9.7	1.70 V	75	54.2	4.3
3	*5955.00	119.9 PK			1.70 V	75	115.4	4.5
4	*5955.00	109.6 AV			1.70 V	75	105.1	4.5
5	11910.00	53.2 PK	74.0	-20.8	3.74 V	331	41.0	12.2
6	11910.00	43.5 AV	54.0	-10.5	3.74 V	331	31.3	12.2
7	17865.00	57.6 PK	74.0	-16.4	3.28 V	186	35.7	21.9
8	17865.00	45.8 AV	54.0	-8.2	3.28 V	186	23.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 49 : 6195 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	108.3 PK			2.54 H	229	103.5	4.8
2	*6195.00	97.6 AV			2.54 H	229	92.8	4.8
3	12390.00	51.0 PK	74.0	-23.0	3.55 H	194	38.7	12.3
4	12390.00	43.8 AV	54.0	-10.2	3.55 H	194	31.5	12.3
5	18585.00	56.4 PK	74.0	-17.6	2.98 H	292	61.4	-5.0
6	18585.00	44.1 AV	54.0	-9.9	2.98 H	292	49.1	-5.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6195.00	119.7 PK			1.68 V	87	114.9	4.8
2	*6195.00	109.1 AV			1.68 V	87	104.3	4.8
3	12390.00	53.3 PK	74.0	-20.7	3.89 V	315	41.0	12.3
4	12390.00	45.4 AV	54.0	-8.6	3.89 V	315	33.1	12.3
5	18585.00	56.2 PK	74.0	-17.8	3.30 V	187	61.2	-5.0
6	18585.00	44.4 AV	54.0	-9.6	3.30 V	187	49.4	-5.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	108.1 PK			2.46 H	230	101.7	6.4
2	*6415.00	97.5 AV			2.46 H	230	91.1	6.4
3	#12830.00	51.7 PK	88.2	-36.5	3.53 H	212	38.7	13.0
4	#12830.00	43.9 AV	68.2	-24.3	3.53 H	212	30.9	13.0
5	19245.00	55.8 PK	74.0	-18.2	2.80 H	311	59.6	-3.8
6	19245.00	44.4 AV	54.0	-9.6	2.80 H	311	48.2	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.1 PK			1.66 V	71	113.7	6.4
2	*6415.00	109.6 AV			1.66 V	71	103.2	6.4
3	#12830.00	53.4 PK	88.2	-34.8	3.87 V	316	40.4	13.0
4	#12830.00	45.5 AV	68.2	-22.7	3.87 V	316	32.5	13.0
5	19245.00	56.0 PK	74.0	-18.0	3.41 V	185	59.8	-3.8
6	19245.00	44.3 AV	54.0	-9.7	3.41 V	185	48.1	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.4 PK			1.55 H	70	87.0	6.4
2	*6435.00	82.3 AV			1.55 H	70	75.9	6.4
3	#12870.00	47.4 PK	88.2	-40.8	3.44 H	234	34.4	13.0
4	#12870.00	35.1 AV	68.2	-33.1	3.44 H	234	22.1	13.0
5	19305.00	55.2 PK	74.0	-18.8	3.66 H	196	58.9	-3.7
6	19305.00	44.0 AV	54.0	-10.0	3.66 H	196	47.7	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	104.6 PK			1.28 V	129	98.2	6.4
2	*6435.00	92.4 AV			1.28 V	129	86.0	6.4
3	#12870.00	47.7 PK	88.2	-40.5	2.36 V	112	34.7	13.0
4	#12870.00	35.9 AV	68.2	-32.3	2.36 V	112	22.9	13.0
5	19305.00	55.6 PK	74.0	-18.4	2.66 V	28	59.3	-3.7
6	19305.00	43.9 AV	54.0	-10.1	2.66 V	28	47.6	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	108.6 PK			2.44 H	237	102.0	6.6
2	*6475.00	97.8 AV			2.44 H	237	91.2	6.6
3	#12950.00	51.4 PK	88.2	-36.8	3.37 H	207	38.3	13.1
4	#12950.00	43.1 AV	68.2	-25.1	3.37 H	207	30.0	13.1
5	19425.00	55.9 PK	74.0	-18.1	3.03 H	318	59.7	-3.8
6	19425.00	44.5 AV	54.0	-9.5	3.03 H	318	48.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	120.0 PK			1.71 V	88	113.4	6.6
2	*6475.00	109.6 AV			1.71 V	88	103.0	6.6
3	#12950.00	53.3 PK	88.2	-34.9	3.88 V	340	40.2	13.1
4	#12950.00	45.1 AV	68.2	-23.1	3.88 V	340	32.0	13.1
5	19425.00	56.0 PK	74.0	-18.0	3.20 V	174	59.8	-3.8
6	19425.00	44.4 AV	54.0	-9.6	3.20 V	174	48.2	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	91.5 PK			1.55 H	81	84.6	6.9
2	*6515.00	81.7 AV			1.55 H	81	74.8	6.9
3	#13030.00	48.4 PK	88.2	-39.8	3.33 H	250	35.2	13.2
4	#13030.00	35.4 AV	68.2	-32.8	3.33 H	250	22.2	13.2
5	19545.00	54.9 PK	74.0	-19.1	3.56 H	224	59.0	-4.1
6	19545.00	43.7 AV	54.0	-10.3	3.56 H	224	47.8	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.4 PK			1.21 V	123	96.5	6.9
2	*6515.00	92.2 AV			1.21 V	123	85.3	6.9
3	#13030.00	49.3 PK	88.2	-38.9	2.40 V	83	36.1	13.2
4	#13030.00	36.0 AV	68.2	-32.2	2.40 V	83	22.8	13.2
5	19545.00	56.2 PK	74.0	-17.8	2.86 V	32	60.3	-4.1
6	19545.00	44.8 AV	54.0	-9.2	2.86 V	32	48.9	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.8 PK			2.47 H	228	100.9	6.9
2	*6535.00	97.2 AV			2.47 H	228	90.3	6.9
3	#13070.00	51.2 PK	88.2	-37.0	3.41 H	213	38.0	13.2
4	#13070.00	43.9 AV	68.2	-24.3	3.41 H	213	30.7	13.2
5	19605.00	56.3 PK	74.0	-17.7	2.80 H	314	60.3	-4.0
6	19605.00	44.1 AV	54.0	-9.9	2.80 H	314	48.1	-4.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	119.2 PK			1.76 V	65	112.3	6.9
2	*6535.00	109.2 AV			1.76 V	65	102.3	6.9
3	#13070.00	53.5 PK	88.2	-34.7	3.85 V	321	40.3	13.2
4	#13070.00	45.8 AV	68.2	-22.4	3.85 V	321	32.6	13.2
5	19605.00	56.2 PK	74.0	-17.8	3.15 V	199	60.2	-4.0
6	19605.00	44.8 AV	54.0	-9.2	3.15 V	199	48.8	-4.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.3 PK			2.50 H	247	100.1	7.2
2	*6695.00	96.5 AV			2.50 H	247	89.3	7.2
3	13390.00	51.9 PK	74.0	-22.1	3.53 H	214	37.9	14.0
4	13390.00	43.0 AV	54.0	-11.0	3.53 H	214	29.0	14.0
5	20085.00	56.0 PK	74.0	-18.0	3.02 H	314	59.5	-3.5
6	20085.00	45.0 AV	54.0	-9.0	3.02 H	314	48.5	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	118.7 PK			1.66 V	82	111.5	7.2
2	*6695.00	108.6 AV			1.66 V	82	101.4	7.2
3	13390.00	53.8 PK	74.0	-20.2	3.71 V	314	39.8	14.0
4	13390.00	45.4 AV	54.0	-8.6	3.71 V	314	31.4	14.0
5	20085.00	56.5 PK	74.0	-17.5	3.41 V	172	60.0	-3.5
6	20085.00	44.2 AV	54.0	-9.8	3.41 V	172	47.7	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.8 PK			2.47 H	228	99.6	7.2
2	*6855.00	95.8 AV			2.47 H	228	88.6	7.2
3	#13710.00	50.5 PK	88.2	-37.7	3.42 H	201	35.3	15.2
4	#13710.00	42.1 AV	68.2	-26.1	3.42 H	201	26.9	15.2
5	20565.00	56.1 PK	74.0	-17.9	3.12 H	283	59.4	-3.3
6	20565.00	45.0 AV	54.0	-9.0	3.12 H	283	48.3	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	117.8 PK			1.68 V	63	110.6	7.2
2	*6855.00	107.9 AV			1.68 V	63	100.7	7.2
3	#13710.00	52.8 PK	88.2	-35.4	3.78 V	324	37.6	15.2
4	#13710.00	44.3 AV	68.2	-23.9	3.78 V	324	29.1	15.2
5	20565.00	54.8 PK	74.0	-19.2	3.08 V	167	58.1	-3.3
6	20565.00	43.8 AV	54.0	-10.2	3.08 V	167	47.1	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	91.5 PK			1.45 H	80	84.3	7.2
2	*6875.00	80.2 AV			1.45 H	80	73.0	7.2
3	#13750.00	48.2 PK	88.2	-40.0	3.31 H	261	33.1	15.1
4	#13750.00	36.2 AV	68.2	-32.0	3.31 H	261	21.1	15.1
5	20625.00	56.5 PK	74.0	-17.5	3.59 H	223	59.8	-3.3
6	20625.00	44.1 AV	54.0	-9.9	3.59 H	223	47.4	-3.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.5 PK			1.34 V	135	95.3	7.2
2	*6875.00	91.7 AV			1.34 V	135	84.5	7.2
3	#13750.00	49.3 PK	88.2	-38.9	2.36 V	102	34.2	15.1
4	#13750.00	36.3 AV	68.2	-31.9	2.36 V	102	21.2	15.1
5	20625.00	55.3 PK	74.0	-18.7	2.71 V	19	58.6	-3.3
6	20625.00	44.5 AV	54.0	-9.5	2.71 V	19	47.8	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	91.7 PK			1.40 H	83	83.7	8.0
2	*6995.00	80.7 AV			1.40 H	83	72.7	8.0
3	#13990.00	48.8 PK	88.2	-39.4	3.33 H	244	33.2	15.6
4	#13990.00	35.4 AV	68.2	-32.8	3.33 H	244	19.8	15.6
5	20985.00	56.2 PK	74.0	-17.8	3.40 H	207	59.0	-2.8
6	20985.00	44.0 AV	54.0	-10.0	3.40 H	207	46.8	-2.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	102.8 PK			1.20 V	143	94.8	8.0
2	*6995.00	91.5 AV			1.20 V	143	83.5	8.0
3	#13990.00	47.7 PK	88.2	-40.5	2.32 V	80	32.1	15.6
4	#13990.00	35.4 AV	68.2	-32.8	2.32 V	80	19.8	15.6
5	20985.00	56.6 PK	74.0	-17.4	2.69 V	36	59.4	-2.8
6	20985.00	44.3 AV	54.0	-9.7	2.69 V	36	47.1	-2.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.9 PK			1.42 H	272	82.4	9.5
2	*7115.00	80.5 AV			1.42 H	272	71.0	9.5
3	#7125.00	79.0 PK	88.2	-9.2	1.42 H	272	69.6	9.4
4	#7125.00	49.2 AV	68.2	-19.0	1.42 H	272	39.8	9.4
5	7250.00	55.0 PK	74.0	-19.0	1.42 H	272	46.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.42 H	272	34.8	8.7
7	#14230.00	48.3 PK	88.2	-39.9	3.22 H	228	33.0	15.3
8	#14230.00	35.3 AV	68.2	-32.9	3.22 H	228	20.0	15.3
9	21345.00	55.8 PK	74.0	-18.2	3.76 H	221	57.4	-1.6
10	21345.00	44.7 AV	54.0	-9.3	3.76 H	221	46.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.0 PK			1.64 V	265	91.5	9.5
2	*7115.00	90.3 AV			1.64 V	265	80.8	9.5
3	#7125.00	85.4 PK	88.2	-2.8	1.64 V	265	76.0	9.4
4	#7125.00	54.5 AV	68.2	-13.7	1.64 V	265	45.1	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.64 V	265	46.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.64 V	265	34.7	8.7
7	#14230.00	48.8 PK	88.2	-39.4	2.63 V	112	33.5	15.3
8	#14230.00	35.0 AV	68.2	-33.2	2.63 V	112	19.7	15.3
9	21345.00	56.2 PK	74.0	-17.8	2.80 V	25	57.8	-1.6
10	21345.00	43.8 AV	54.0	-10.2	2.80 V	25	45.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.5 PK	88.2	-24.7	2.47 H	218	59.2	4.3
2	#5925.00	41.7 AV	68.2	-26.5	2.47 H	218	37.4	4.3
3	*5955.00	109.0 PK			2.47 H	218	104.5	4.5
4	*5955.00	99.6 AV			2.47 H	218	95.1	4.5
5	11910.00	50.1 PK	74.0	-23.9	3.31 H	222	37.9	12.2
6	11910.00	38.9 AV	54.0	-15.1	3.31 H	222	26.7	12.2
7	17865.00	56.0 PK	74.0	-18.0	3.13 H	313	34.1	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.13 H	313	22.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	78.2 PK	88.2	-10.0	1.70 V	85	73.9	4.3
2	#5925.00	51.9 AV	68.2	-16.3	1.70 V	85	47.6	4.3
3	*5955.00	120.9 PK			1.70 V	85	116.4	4.5
4	*5955.00	111.0 AV			1.70 V	85	106.5	4.5
5	11910.00	51.9 PK	74.0	-22.1	3.86 V	315	39.7	12.2
6	11910.00	40.5 AV	54.0	-13.5	3.86 V	315	28.3	12.2
7	17865.00	56.0 PK	74.0	-18.0	3.10 V	166	34.1	21.9
8	17865.00	44.1 AV	54.0	-9.9	3.10 V	166	22.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	92.6 PK			1.42 H	271	86.0	6.6
2	*6475.00	81.6 AV			1.42 H	271	75.0	6.6
3	#12950.00	48.0 PK	88.2	-40.2	3.51 H	253	34.9	13.1
4	#12950.00	34.9 AV	68.2	-33.3	3.51 H	253	21.8	13.1
5	19425.00	57.0 PK	74.0	-17.0	3.73 H	211	60.8	-3.8
6	19425.00	45.2 AV	54.0	-8.8	3.73 H	211	49.0	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	102.3 PK			3.22 V	252	95.7	6.6
2	*6475.00	91.2 AV			3.22 V	252	84.6	6.6
3	#12950.00	49.0 PK	88.2	-39.2	2.54 V	67	35.9	13.1
4	#12950.00	35.1 AV	68.2	-33.1	2.54 V	67	22.0	13.1
5	19425.00	56.5 PK	74.0	-17.5	2.58 V	24	60.3	-3.8
6	19425.00	45.2 AV	54.0	-8.8	2.58 V	24	49.0	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	92.2 PK			1.41 H	271	85.0	7.2
2	*6695.00	81.1 AV			1.41 H	271	73.9	7.2
3	13390.00	48.1 PK	74.0	-25.9	3.46 H	258	34.1	14.0
4	13390.00	35.0 AV	54.0	-19.0	3.46 H	258	21.0	14.0
5	20085.00	57.1 PK	74.0	-16.9	3.71 H	216	60.6	-3.5
6	20085.00	45.2 AV	54.0	-8.8	3.71 H	216	48.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	102.6 PK			3.17 V	270	95.4	7.2
2	*6695.00	91.0 AV			3.17 V	270	83.8	7.2
3	13390.00	48.8 PK	74.0	-25.2	2.59 V	89	34.8	14.0
4	13390.00	34.5 AV	54.0	-19.5	2.59 V	89	20.5	14.0
5	20085.00	56.2 PK	74.0	-17.8	2.52 V	31	59.7	-3.5
6	20085.00	45.0 AV	54.0	-9.0	2.52 V	31	48.5	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.2 PK			1.43 H	274	82.7	9.5
2	*7115.00	81.1 AV			1.43 H	274	71.6	9.5
3	#7125.00	62.7 PK	88.2	-25.5	1.43 H	274	53.3	9.4
4	#7125.00	43.7 AV	68.2	-24.5	1.43 H	274	34.3	9.4
5	7250.00	56.0 PK	74.0	-18.0	1.43 H	274	47.3	8.7
6	7250.00	43.5 AV	54.0	-10.5	1.43 H	274	34.8	8.7
7	#14230.00	48.3 PK	88.2	-39.9	3.48 H	248	33.0	15.3
8	#14230.00	35.2 AV	68.2	-33.0	3.48 H	248	19.9	15.3
9	21345.00	56.2 PK	74.0	-17.8	3.72 H	200	57.8	-1.6
10	21345.00	44.7 AV	54.0	-9.3	3.72 H	200	46.3	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	102.0 PK			3.18 V	248	92.5	9.5
2	*7115.00	90.5 AV			3.18 V	248	81.0	9.5
3	#7125.00	62.7 PK	88.2	-25.5	3.18 V	248	53.3	9.4
4	#7125.00	44.7 AV	68.2	-23.5	3.18 V	248	35.3	9.4
5	7250.00	55.3 PK	74.0	-18.7	3.18 V	248	46.6	8.7
6	7250.00	43.3 AV	54.0	-10.7	3.18 V	248	34.6	8.7
7	#14230.00	49.4 PK	88.2	-38.8	2.52 V	84	34.1	15.3
8	#14230.00	35.2 AV	68.2	-33.0	2.52 V	84	19.9	15.3
9	21345.00	56.9 PK	74.0	-17.1	2.61 V	13	58.5	-1.6
10	21345.00	45.4 AV	54.0	-8.6	2.61 V	13	47.0	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.9 PK	88.2	-31.3	2.47 H	218	52.6	4.3
2	#5925.00	42.8 AV	68.2	-25.4	2.47 H	218	38.5	4.3
3	*5955.00	106.7 PK			2.47 H	218	102.2	4.5
4	*5955.00	96.6 AV			2.47 H	218	92.1	4.5
5	11910.00	48.5 PK	74.0	-25.5	3.38 H	216	36.3	12.2
6	11910.00	38.0 AV	54.0	-16.0	3.38 H	216	25.8	12.2
7	17865.00	56.3 PK	74.0	-17.7	3.07 H	306	34.4	21.9
8	17865.00	44.4 AV	54.0	-9.6	3.07 H	306	22.5	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.4 PK	88.2	-17.8	1.69 V	86	66.1	4.3
2	#5925.00	56.3 AV	68.2	-11.9	1.69 V	86	52.0	4.3
3	*5955.00	118.8 PK			1.69 V	86	114.3	4.5
4	*5955.00	108.6 AV			1.69 V	86	104.1	4.5
5	11910.00	50.2 PK	74.0	-23.8	3.87 V	348	38.0	12.2
6	11910.00	39.8 AV	54.0	-14.2	3.87 V	348	27.6	12.2
7	17865.00	55.8 PK	74.0	-18.2	3.15 V	194	33.9	21.9
8	17865.00	44.8 AV	54.0	-9.2	3.15 V	194	22.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	90.6 PK			1.42 H	254	84.0	6.6
2	*6475.00	80.4 AV			1.42 H	254	73.8	6.6
3	#12950.00	48.6 PK	88.2	-39.6	3.24 H	228	35.5	13.1
4	#12950.00	36.2 AV	68.2	-32.0	3.24 H	228	23.1	13.1
5	19425.00	55.4 PK	74.0	-18.6	3.71 H	205	59.2	-3.8
6	19425.00	43.5 AV	54.0	-10.5	3.71 H	205	47.3	-3.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.7 PK			1.55 V	262	95.1	6.6
2	*6475.00	90.5 AV			1.55 V	262	83.9	6.6
3	#12950.00	47.3 PK	88.2	-40.9	2.52 V	120	34.2	13.1
4	#12950.00	35.8 AV	68.2	-32.4	2.52 V	120	22.7	13.1
5	19425.00	55.1 PK	74.0	-18.9	2.71 V	30	58.9	-3.8
6	19425.00	44.9 AV	54.0	-9.1	2.71 V	30	48.7	-3.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	91.2 PK			1.39 H	271	84.0	7.2
2	*6695.00	80.9 AV			1.39 H	271	73.7	7.2
3	13390.00	49.2 PK	74.0	-24.8	3.19 H	224	35.2	14.0
4	13390.00	36.7 AV	54.0	-17.3	3.19 H	224	22.7	14.0
5	20085.00	54.8 PK	74.0	-19.2	3.65 H	217	58.3	-3.5
6	20085.00	43.2 AV	54.0	-10.8	3.65 H	217	46.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	101.9 PK			1.60 V	263	94.7	7.2
2	*6695.00	90.4 AV			1.60 V	263	83.2	7.2
3	13390.00	47.8 PK	74.0	-26.2	2.58 V	108	33.8	14.0
4	13390.00	36.1 AV	54.0	-17.9	2.58 V	108	22.1	14.0
5	20085.00	55.4 PK	74.0	-18.6	2.70 V	20	58.9	-3.5
6	20085.00	45.4 AV	54.0	-8.6	2.70 V	20	48.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.2 PK			1.42 H	272	81.7	9.5
2	*7115.00	80.7 AV			1.42 H	272	71.2	9.5
3	#7125.00	78.9 PK	88.2	-9.3	1.42 H	272	69.5	9.4
4	#7125.00	48.4 AV	68.2	-19.8	1.42 H	272	39.0	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.42 H	272	46.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.42 H	272	34.7	8.7
7	#14230.00	49.0 PK	88.2	-39.2	3.27 H	230	33.7	15.3
8	#14230.00	36.3 AV	68.2	-31.9	3.27 H	230	21.0	15.3
9	21345.00	55.4 PK	74.0	-18.6	3.69 H	220	57.0	-1.6
10	21345.00	43.6 AV	54.0	-10.4	3.69 H	220	45.2	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.3 PK			1.64 V	267	91.8	9.5
2	*7115.00	90.0 AV			1.64 V	267	80.5	9.5
3	#7125.00	86.6 PK	88.2	-1.6	1.64 V	267	77.2	9.4
4	#7125.00	55.1 AV	68.2	-13.1	1.64 V	267	45.7	9.4
5	7250.00	55.6 PK	74.0	-18.4	1.64 V	267	46.9	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.64 V	267	34.7	8.7
7	#14230.00	47.6 PK	88.2	-40.6	2.59 V	106	32.3	15.3
8	#14230.00	35.8 AV	68.2	-32.4	2.59 V	106	20.5	15.3
9	21345.00	55.1 PK	74.0	-18.9	2.74 V	35	56.7	-1.6
10	21345.00	45.0 AV	54.0	-9.0	2.74 V	35	46.6	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	66.6 PK	88.2	-21.6	2.37 H	239	62.3	4.3
2	#5925.00	53.8 AV	68.2	-14.4	2.37 H	239	49.5	4.3
3	*5985.00	99.8 PK			2.37 H	239	95.4	4.4
4	*5985.00	87.3 AV			2.37 H	239	82.9	4.4
5	11970.00	43.8 PK	74.0	-30.2	3.57 H	205	31.6	12.2
6	11970.00	33.1 AV	54.0	-20.9	3.57 H	205	20.9	12.2
7	17955.00	56.4 PK	74.0	-17.6	3.09 H	320	33.0	23.4
8	17955.00	44.3 AV	54.0	-9.7	3.09 H	320	20.9	23.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.2 PK	88.2	-8.0	1.75 V	76	75.9	4.3
2	#5925.00	66.6 AV	68.2	-1.6	1.75 V	76	62.3	4.3
3	*5985.00	109.7 PK			1.75 V	76	105.3	4.4
4	*5985.00	98.7 AV			1.75 V	76	94.3	4.4
5	11970.00	45.6 PK	74.0	-28.4	3.72 V	323	33.4	12.2
6	11970.00	34.9 AV	54.0	-19.1	3.72 V	323	22.7	12.2
7	17955.00	55.8 PK	74.0	-18.2	3.29 V	163	32.4	23.4
8	17955.00	44.2 AV	54.0	-9.8	3.29 V	163	20.8	23.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	91.9 PK			1.34 H	264	85.4	6.5
2	*6465.00	80.6 AV			1.34 H	264	74.1	6.5
3	#12930.00	47.9 PK	88.2	-40.3	3.36 H	253	34.8	13.1
4	#12930.00	36.2 AV	68.2	-32.0	3.36 H	253	23.1	13.1
5	19395.00	54.8 PK	74.0	-19.2	3.45 H	220	58.5	-3.7
6	19395.00	44.5 AV	54.0	-9.5	3.45 H	220	48.2	-3.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	102.0 PK			1.76 V	279	95.5	6.5
2	*6465.00	91.0 AV			1.76 V	279	84.5	6.5
3	#12930.00	47.2 PK	88.2	-41.0	2.59 V	95	34.1	13.1
4	#12930.00	35.9 AV	68.2	-32.3	2.59 V	95	22.8	13.1
5	19395.00	55.6 PK	74.0	-18.4	2.84 V	44	59.3	-3.7
6	19395.00	44.8 AV	54.0	-9.2	2.84 V	44	48.5	-3.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	93.2 PK			1.43 H	260	86.0	7.2
2	*6705.00	81.5 AV			1.43 H	260	74.3	7.2
3	#13410.00	48.3 PK	88.2	-39.9	3.38 H	261	34.1	14.2
4	#13410.00	36.0 AV	68.2	-32.2	3.38 H	261	21.8	14.2
5	20115.00	54.6 PK	74.0	-19.4	3.44 H	219	58.1	-3.5
6	20115.00	44.2 AV	54.0	-9.8	3.44 H	219	47.7	-3.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	102.3 PK			1.76 V	273	95.1	7.2
2	*6705.00	91.1 AV			1.76 V	273	83.9	7.2
3	#13410.00	47.4 PK	88.2	-40.8	2.59 V	92	33.2	14.2
4	#13410.00	35.9 AV	68.2	-32.3	2.59 V	92	21.7	14.2
5	20115.00	56.0 PK	74.0	-18.0	2.91 V	51	59.5	-3.5
6	20115.00	45.4 AV	54.0	-8.6	2.91 V	51	48.9	-3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	92.6 PK			1.37 H	273	84.2	8.4
2	*7025.00	81.0 AV			1.37 H	273	72.6	8.4
3	#7125.00	56.7 PK	88.2	-31.5	1.37 H	273	47.3	9.4
4	#7125.00	44.1 AV	68.2	-24.1	1.37 H	273	34.7	9.4
5	7250.00	56.1 PK	74.0	-17.9	1.37 H	273	47.4	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.37 H	273	34.7	8.7
7	#14050.00	48.1 PK	88.2	-40.1	3.36 H	246	32.6	15.5
8	#14050.00	36.1 AV	68.2	-32.1	3.36 H	246	20.6	15.5
9	21075.00	54.9 PK	74.0	-19.1	3.50 H	215	57.1	-2.2
10	21075.00	44.4 AV	54.0	-9.6	3.50 H	215	46.6	-2.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	102.7 PK			1.77 V	272	94.3	8.4
2	*7025.00	91.2 AV			1.77 V	272	82.8	8.4
3	#7125.00	57.4 PK	88.2	-30.8	1.77 V	272	48.0	9.4
4	#7125.00	44.6 AV	68.2	-23.6	1.77 V	272	35.2	9.4
5	7250.00	55.3 PK	74.0	-18.7	1.77 V	272	46.6	8.7
6	7250.00	43.3 AV	54.0	-10.7	1.77 V	272	34.6	8.7
7	#14050.00	47.6 PK	88.2	-40.6	2.57 V	98	32.1	15.5
8	#14050.00	36.3 AV	68.2	-31.9	2.57 V	98	20.8	15.5
9	21075.00	55.8 PK	74.0	-18.2	2.88 V	51	58.0	-2.2
10	21075.00	45.1 AV	54.0	-8.9	2.88 V	51	47.3	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.4 PK	88.2	-22.8	2.51 H	245	61.1	4.3
2	#5925.00	55.7 AV	68.2	-12.5	2.51 H	245	51.4	4.3
3	*6025.00	96.1 PK			2.51 H	245	91.9	4.2
4	*6025.00	86.0 AV			2.51 H	245	81.8	4.2
5	12050.00	43.6 PK	74.0	-30.4	3.47 H	207	31.2	12.4
6	12050.00	32.9 AV	54.0	-21.1	3.47 H	207	20.5	12.4
7	18075.00	56.0 PK	74.0	-18.0	3.12 H	315	60.7	-4.7
8	18075.00	44.0 AV	54.0	-10.0	3.12 H	315	48.7	-4.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.0 PK	88.2	-8.2	1.78 V	88	75.7	4.3
2	#5925.00	66.5 AV	68.2	-1.7	1.78 V	88	62.2	4.3
3	*6025.00	108.8 PK			1.78 V	88	104.6	4.2
4	*6025.00	95.7 AV			1.78 V	88	91.5	4.2
5	12050.00	45.7 PK	74.0	-28.3	3.80 V	322	33.3	12.4
6	12050.00	34.6 AV	54.0	-19.4	3.80 V	322	22.2	12.4
7	18075.00	55.8 PK	74.0	-18.2	3.40 V	173	60.5	-4.7
8	18075.00	44.2 AV	54.0	-9.8	3.40 V	173	48.9	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	95.4 PK			1.07 H	247	88.6	6.8
2	*6505.00	82.7 AV			1.07 H	247	75.9	6.8
3	#13010.00	49.1 PK	88.2	-39.1	3.24 H	226	35.9	13.2
4	#13010.00	35.5 AV	68.2	-32.7	3.24 H	226	22.3	13.2
5	19515.00	56.6 PK	74.0	-17.4	3.68 H	233	60.7	-4.1
6	19515.00	44.1 AV	54.0	-9.9	3.68 H	233	48.2	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.3 PK			1.81 V	285	95.5	6.8
2	*6505.00	89.9 AV			1.81 V	285	83.1	6.8
3	#13010.00	49.2 PK	88.2	-39.0	2.63 V	82	36.0	13.2
4	#13010.00	35.0 AV	68.2	-33.2	2.63 V	82	21.8	13.2
5	19515.00	55.5 PK	74.0	-18.5	2.67 V	54	59.6	-4.1
6	19515.00	44.2 AV	54.0	-9.8	2.67 V	54	48.3	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	95.3 PK			1.14 H	248	88.1	7.2
2	*6665.00	82.4 AV			1.14 H	248	75.2	7.2
3	13330.00	48.7 PK	74.0	-25.3	3.24 H	234	34.9	13.8
4	13330.00	35.3 AV	54.0	-18.7	3.24 H	234	21.5	13.8
5	19995.00	56.6 PK	74.0	-17.4	3.67 H	228	60.2	-3.6
6	19995.00	44.3 AV	54.0	-9.7	3.67 H	228	47.9	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.6 PK			1.80 V	286	95.4	7.2
2	*6665.00	90.5 AV			1.80 V	286	83.3	7.2
3	13330.00	49.4 PK	74.0	-24.6	2.52 V	85	35.6	13.8
4	13330.00	35.4 AV	54.0	-18.6	2.52 V	85	21.6	13.8
5	19995.00	55.4 PK	74.0	-18.6	2.67 V	30	59.0	-3.6
6	19995.00	44.0 AV	54.0	-10.0	2.67 V	30	47.6	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	95.2 PK			1.09 H	243	87.4	7.8
2	*6985.00	82.5 AV			1.09 H	243	74.7	7.8
3	#7125.00	59.0 PK	88.2	-29.2	1.09 H	243	49.6	9.4
4	#7125.00	45.6 AV	68.2	-22.6	1.09 H	243	36.2	9.4
5	7250.00	47.3 PK	74.0	-26.7	1.09 H	243	38.6	8.7
6	7250.00	43.4 AV	54.0	-10.6	1.09 H	243	34.7	8.7
7	#13970.00	48.4 PK	88.2	-39.8	3.26 H	236	32.9	15.5
8	#13970.00	35.0 AV	68.2	-33.2	3.26 H	236	19.5	15.5
9	20955.00	56.8 PK	74.0	-17.2	3.65 H	227	59.5	-2.7
10	20955.00	44.2 AV	54.0	-9.8	3.65 H	227	46.9	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	102.4 PK			1.78 V	272	94.6	7.8
2	*6985.00	90.3 AV			1.78 V	272	82.5	7.8
3	#7125.00	65.7 PK	88.2	-22.5	1.78 V	272	56.3	9.4
4	#7125.00	49.1 AV	68.2	-19.1	1.78 V	272	39.7	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.78 V	272	46.7	8.7
6	7250.00	43.7 AV	54.0	-10.3	1.78 V	272	35.0	8.7
7	#13970.00	49.2 PK	88.2	-39.0	2.58 V	79	33.7	15.5
8	#13970.00	35.1 AV	68.2	-33.1	2.58 V	79	19.6	15.5
9	20955.00	55.8 PK	74.0	-18.2	2.69 V	44	58.5	-2.7
10	20955.00	44.3 AV	54.0	-9.7	2.69 V	44	47.0	-2.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	69.0 PK	88.2	-19.2	2.50 H	242	64.7	4.3
2	#5925.00	55.7 AV	68.2	-12.5	2.50 H	242	51.4	4.3
3	*6025.00	97.2 PK			2.50 H	242	93.0	4.2
4	*6025.00	86.0 AV			2.50 H	242	81.8	4.2
5	12050.00	43.9 PK	74.0	-30.1	3.31 H	223	31.5	12.4
6	12050.00	33.2 AV	54.0	-20.8	3.31 H	223	20.8	12.4
7	18075.00	56.6 PK	74.0	-17.4	2.96 H	315	61.3	-4.7
8	18075.00	44.2 AV	54.0	-9.8	2.96 H	315	48.9	-4.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.0 PK	88.2	-9.2	1.79 V	76	74.7	4.3
2	#5925.00	65.1 AV	68.2	-3.1	1.79 V	76	60.8	4.3
3	*6025.00	106.8 PK			1.79 V	76	102.6	4.2
4	*6025.00	95.3 AV			1.79 V	76	91.1	4.2
5	12050.00	45.5 PK	74.0	-28.5	3.79 V	331	33.1	12.4
6	12050.00	34.8 AV	54.0	-19.2	3.79 V	331	22.4	12.4
7	18075.00	56.1 PK	74.0	-17.9	3.36 V	188	60.8	-4.7
8	18075.00	44.1 AV	54.0	-9.9	3.36 V	188	48.8	-4.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	94.2 PK			1.02 H	183	87.4	6.8
2	*6505.00	82.4 AV			1.02 H	183	75.6	6.8
3	#13010.00	49.1 PK	88.2	-39.1	3.50 H	270	35.9	13.2
4	#13010.00	34.4 AV	68.2	-33.8	3.50 H	270	21.2	13.2
5	19515.00	55.3 PK	74.0	-18.7	3.63 H	198	59.4	-4.1
6	19515.00	44.0 AV	54.0	-10.0	3.63 H	198	48.1	-4.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	102.8 PK			1.81 V	262	96.0	6.8
2	*6505.00	91.0 AV			1.81 V	262	84.2	6.8
3	#13010.00	49.4 PK	88.2	-38.8	2.26 V	102	36.2	13.2
4	#13010.00	35.1 AV	68.2	-33.1	2.26 V	102	21.9	13.2
5	19515.00	56.7 PK	74.0	-17.3	2.77 V	22	60.8	-4.1
6	19515.00	44.1 AV	54.0	-9.9	2.77 V	22	48.2	-4.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 70% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	94.4 PK			1.00 H	181	87.2	7.2
2	*6665.00	82.3 AV			1.00 H	181	75.1	7.2
3	13330.00	49.2 PK	74.0	-24.8	3.53 H	257	35.4	13.8
4	13330.00	34.6 AV	54.0	-19.4	3.53 H	257	20.8	13.8
5	19995.00	55.8 PK	74.0	-18.2	3.55 H	221	59.4	-3.6
6	19995.00	44.7 AV	54.0	-9.3	3.55 H	221	48.3	-3.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	102.7 PK			1.74 V	270	95.5	7.2
2	*6665.00	90.7 AV			1.74 V	270	83.5	7.2
3	13330.00	49.5 PK	74.0	-24.5	2.33 V	88	35.7	13.8
4	13330.00	35.3 AV	54.0	-18.7	2.33 V	88	21.5	13.8
5	19995.00	57.2 PK	74.0	-16.8	2.86 V	24	60.8	-3.6
6	19995.00	44.6 AV	54.0	-9.4	2.86 V	24	48.2	-3.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 73% RH
Tested By	Owen Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	94.1 PK			1.00 H	169	86.3	7.8
2	*6985.00	82.2 AV			1.00 H	169	74.4	7.8
3	#7125.00	58.8 PK	88.2	-29.4	1.00 H	169	49.4	9.4
4	#7125.00	46.6 AV	68.2	-21.6	1.00 H	169	37.2	9.4
5	7250.00	56.9 PK	74.0	-17.1	1.00 H	169	48.2	8.7
6	7250.00	43.6 AV	54.0	-10.4	1.00 H	169	34.9	8.7
7	#13970.00	49.3 PK	88.2	-38.9	3.50 H	258	33.8	15.5
8	#13970.00	34.5 AV	68.2	-33.7	3.50 H	258	19.0	15.5
9	20955.00	55.6 PK	74.0	-18.4	3.60 H	213	58.3	-2.7
10	20955.00	44.3 AV	54.0	-9.7	3.60 H	213	47.0	-2.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	103.1 PK			1.75 V	270	95.3	7.8
2	*6985.00	91.1 AV			1.75 V	270	83.3	7.8
3	#7125.00	66.9 PK	88.2	-21.3	1.75 V	270	57.5	9.4
4	#7125.00	51.2 AV	68.2	-17.0	1.75 V	270	41.8	9.4
5	7250.00	55.4 PK	74.0	-18.6	1.75 V	270	46.7	8.7
6	7250.00	43.9 AV	54.0	-10.1	1.75 V	270	35.2	8.7
7	#13970.00	49.0 PK	88.2	-39.2	2.31 V	97	33.5	15.5
8	#13970.00	35.0 AV	68.2	-33.2	2.31 V	97	19.5	15.5
9	20955.00	56.9 PK	74.0	-17.1	2.81 V	19	59.6	-2.7
10	20955.00	44.4 AV	54.0	-9.6	2.81 V	19	47.1	-2.7

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

Plot of Band Edge


Mode C

2Tx


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

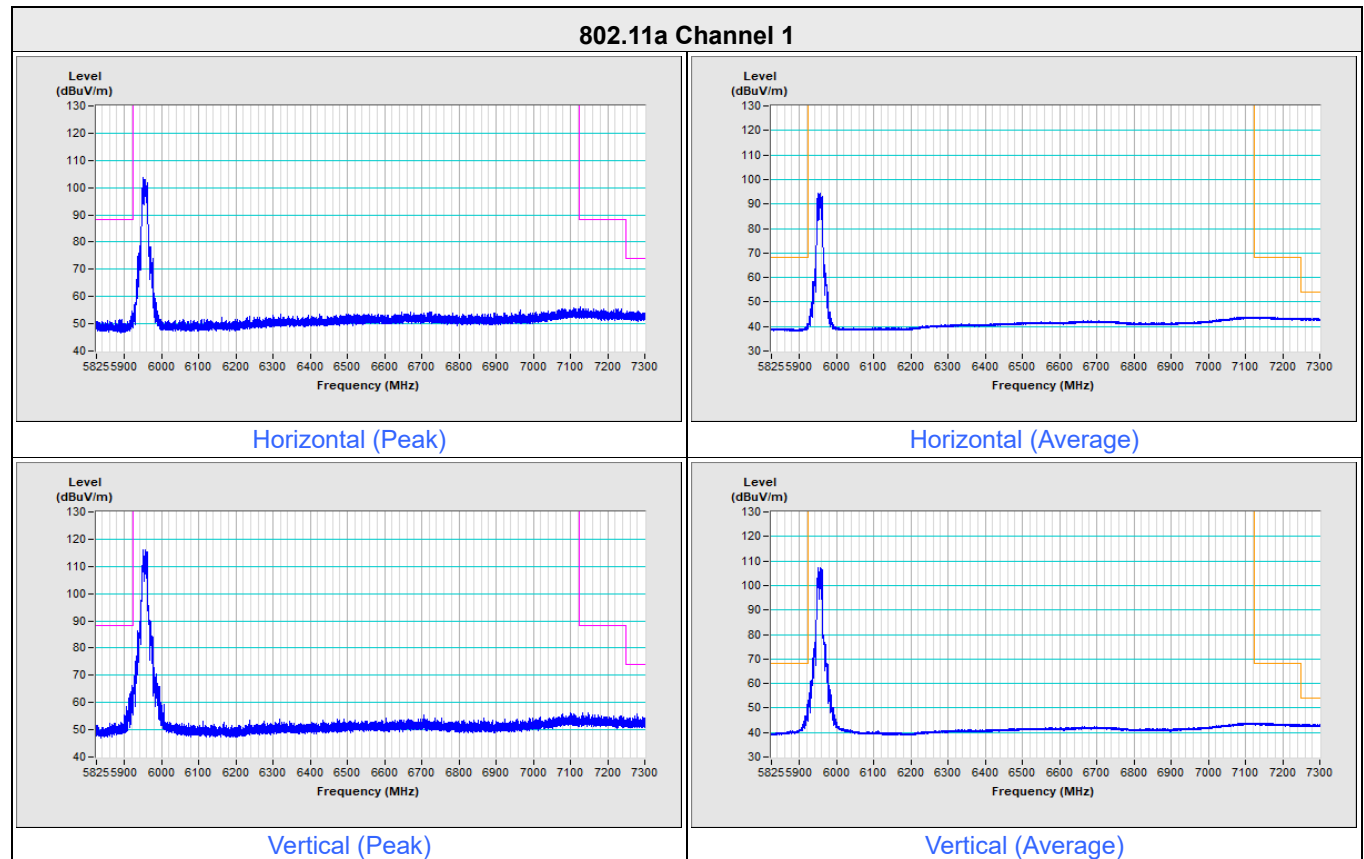


802.11a Channel 233

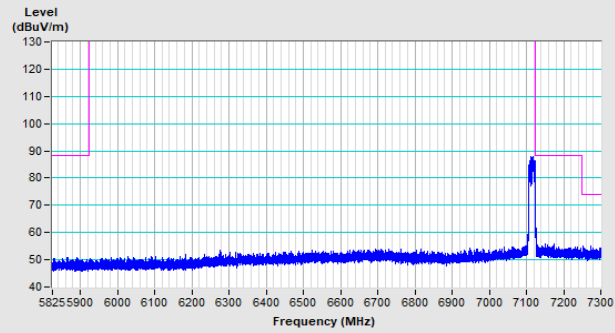


Horizontal (Peak)

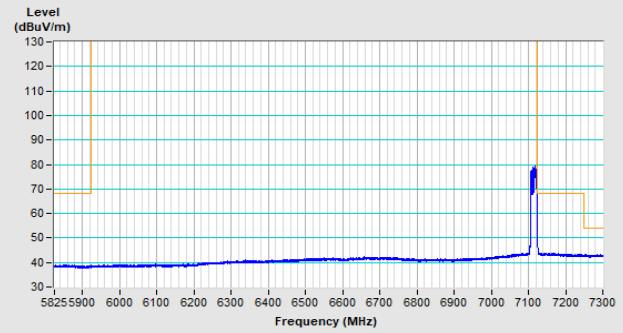

Horizontal (Average)

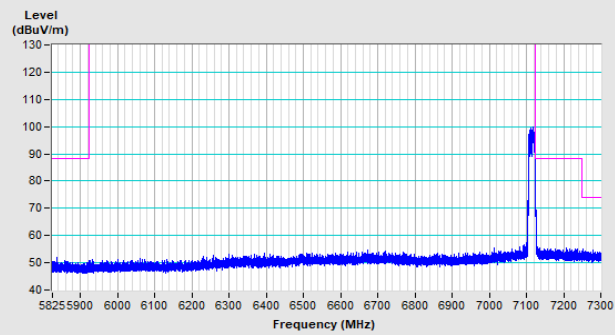


Vertical (Peak)

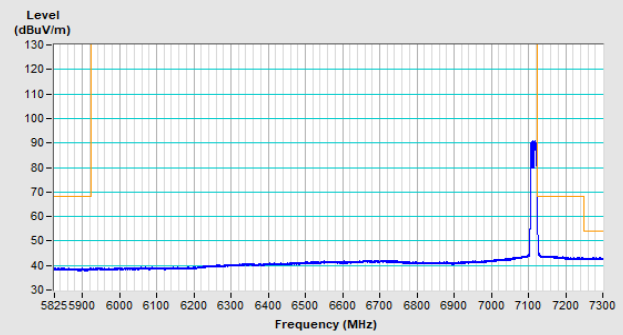


Vertical (Average)

2Tx NSS2


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

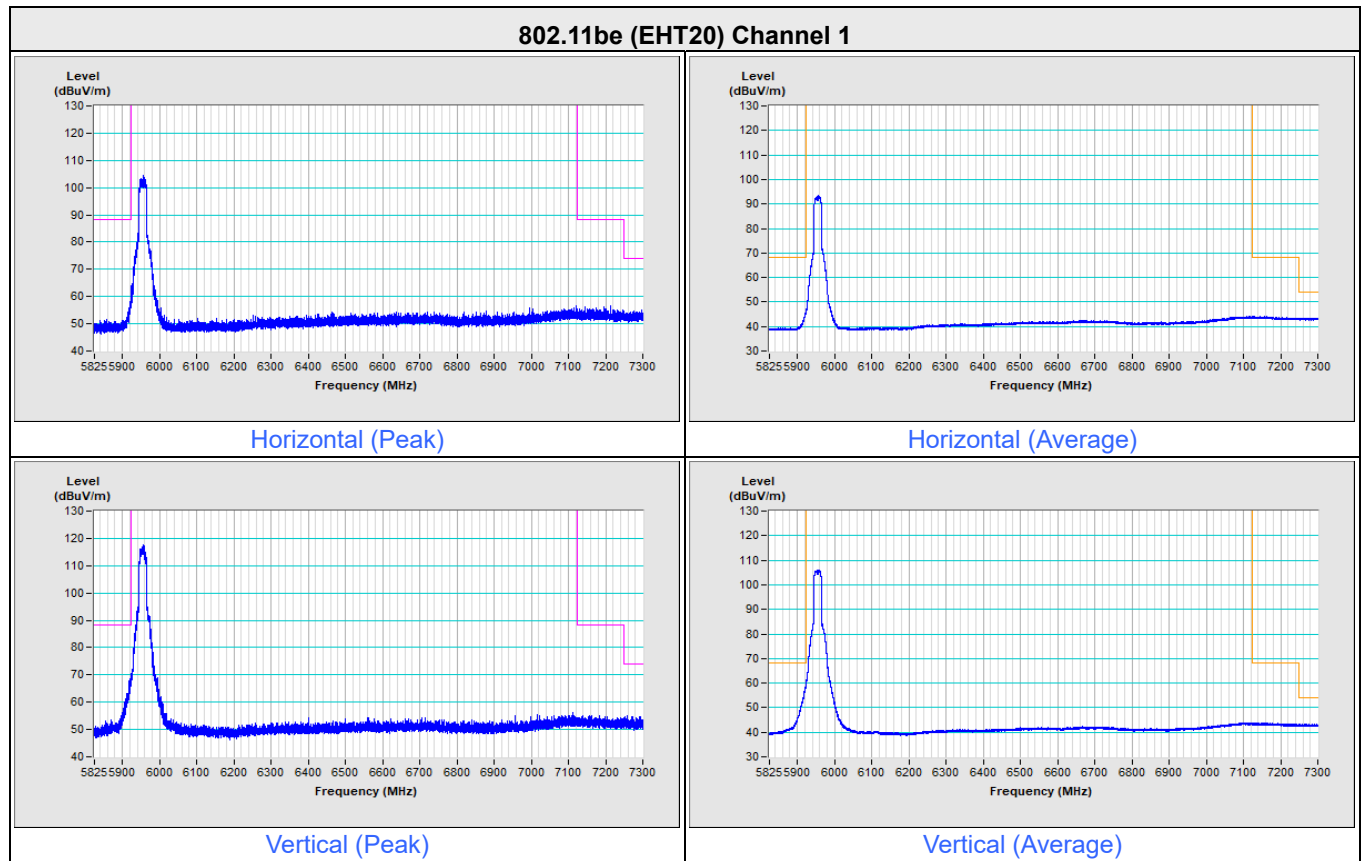

802.11be (EHT20) Channel 233

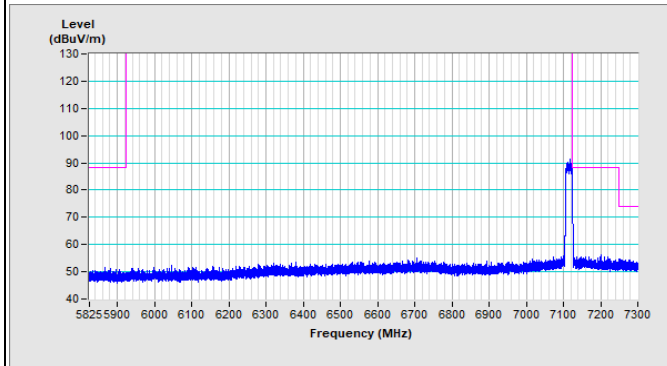


Horizontal (Peak)

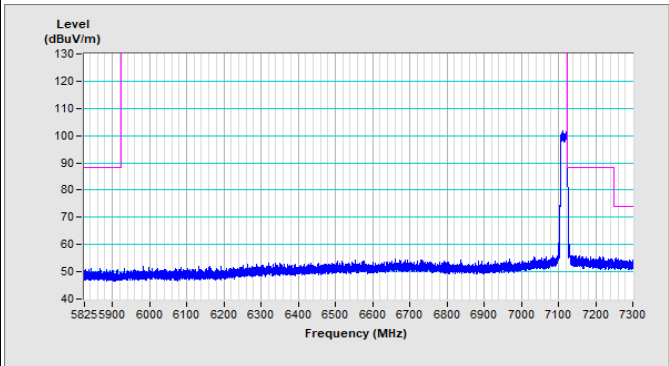


Vertical (Peak)

For Integration method:

802.11be (EHT20) Channel 233

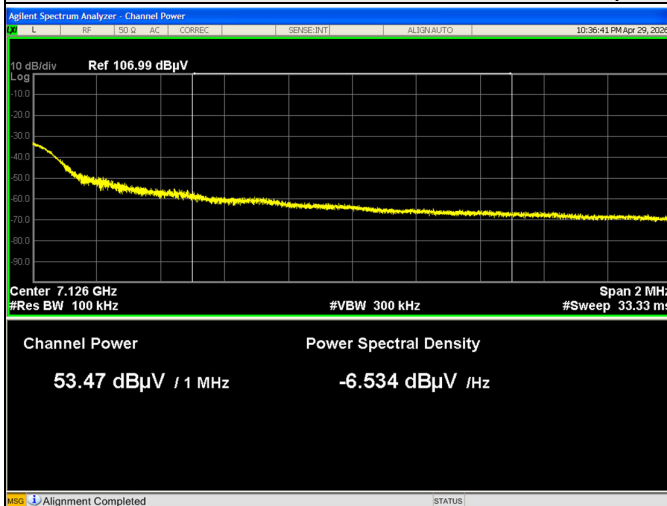


Horizontal (Average)

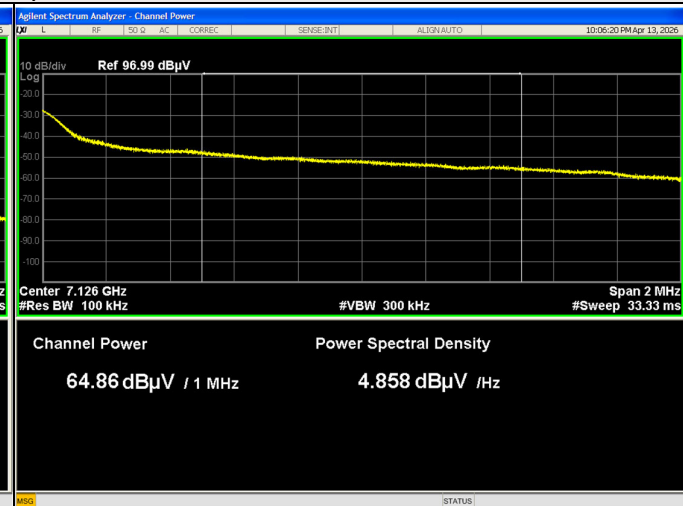


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 3

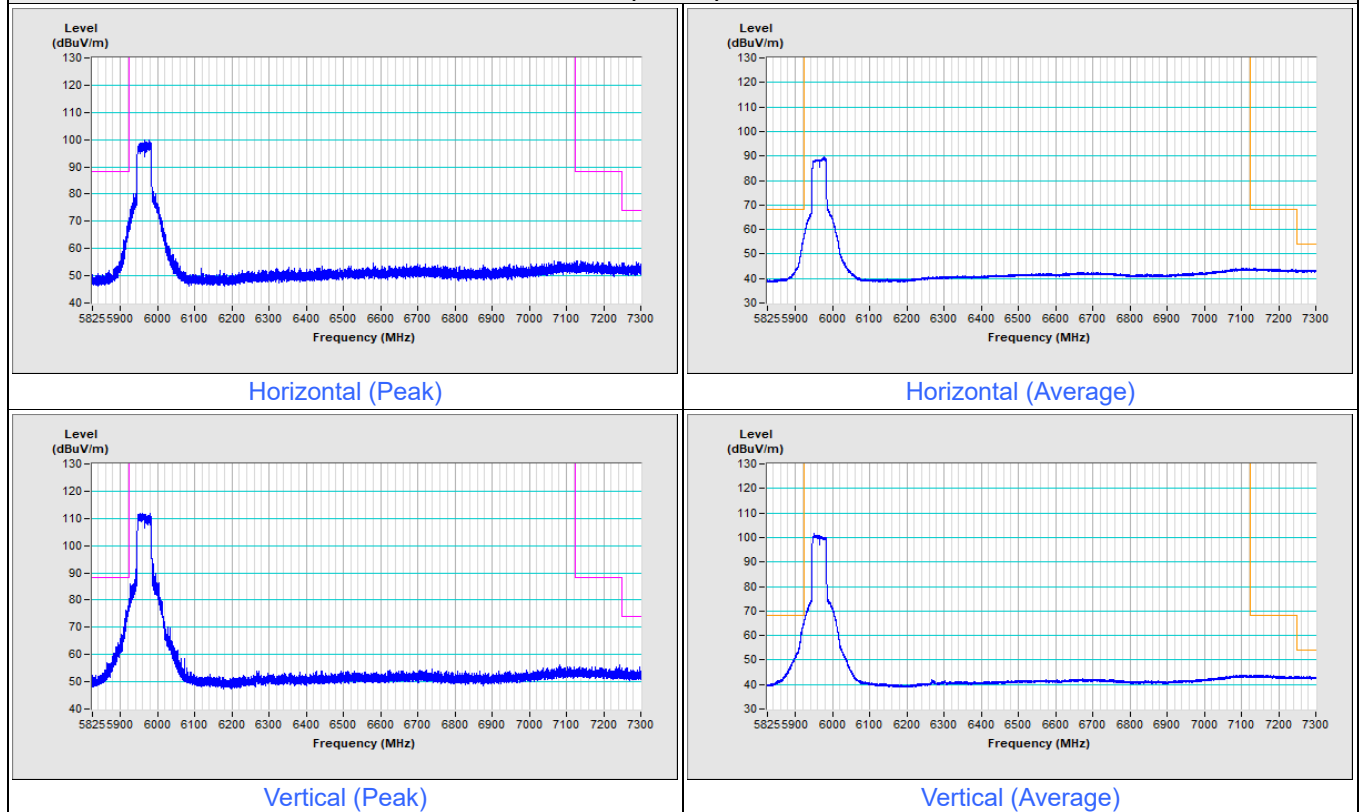


802.11be (EHT40) Channel 227

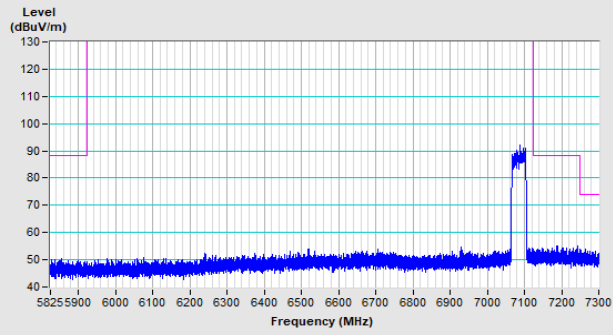


Horizontal (Peak)

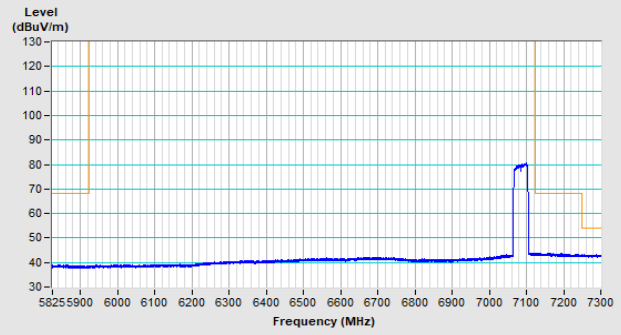

Horizontal (Average)

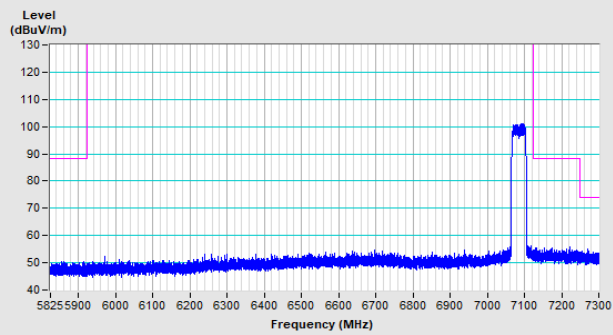


Vertical (Peak)

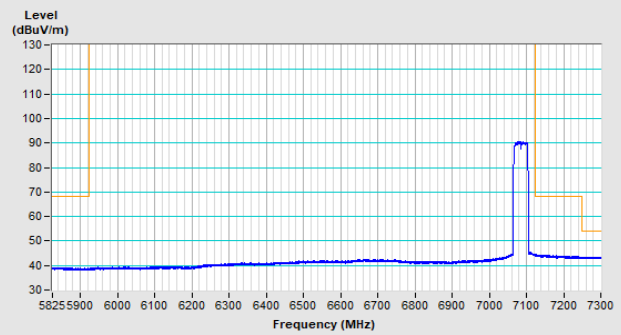


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 7

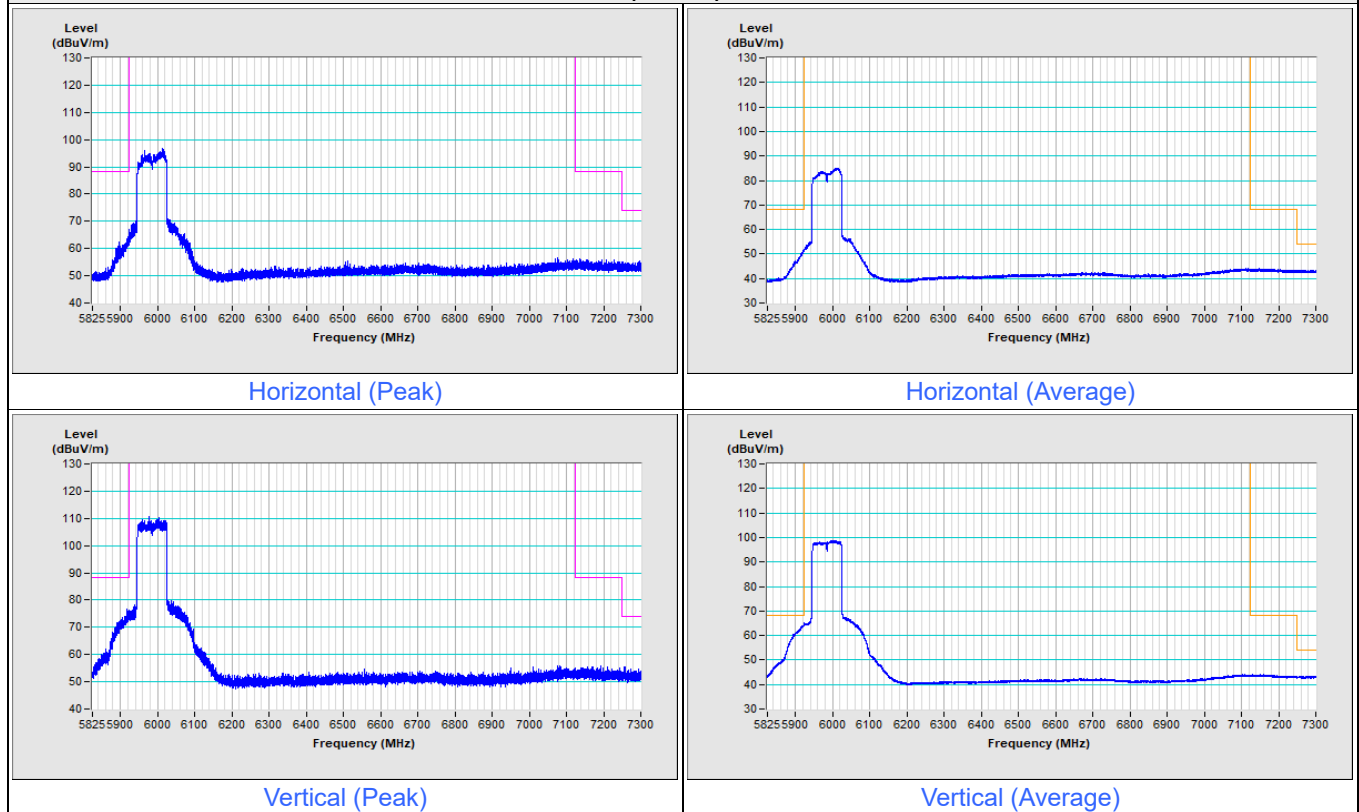


802.11be (EHT80) Channel 215

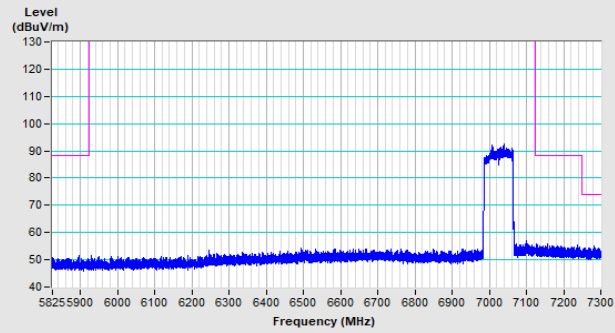


Horizontal (Peak)

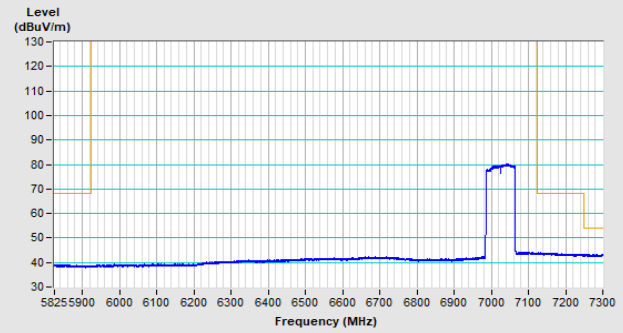

Horizontal (Average)

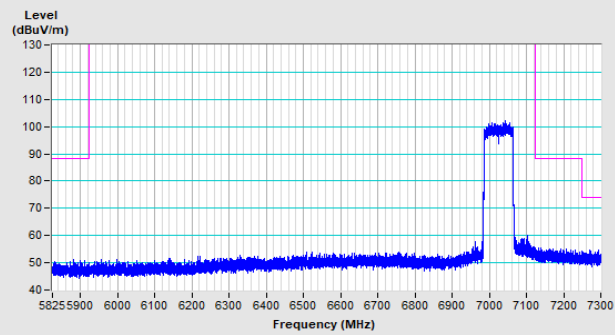


Vertical (Peak)

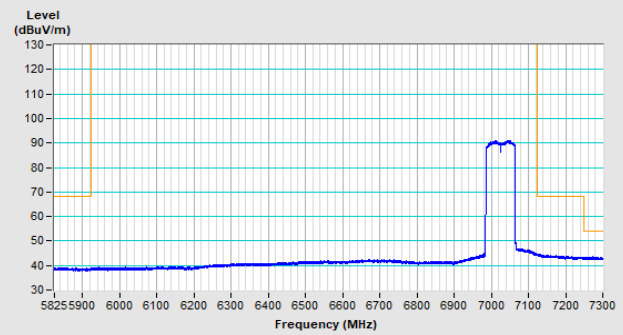


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 15

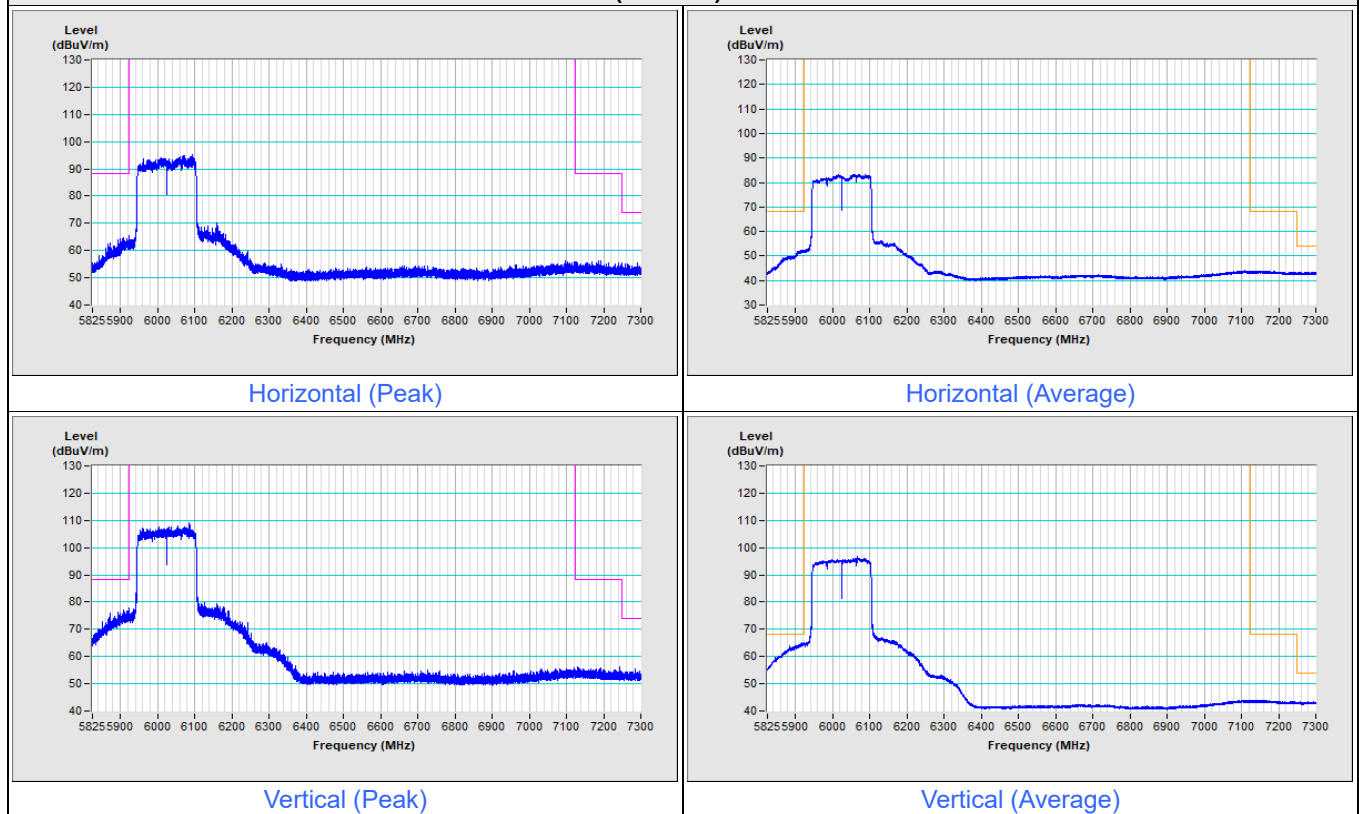


802.11be (EHT160) Channel 207

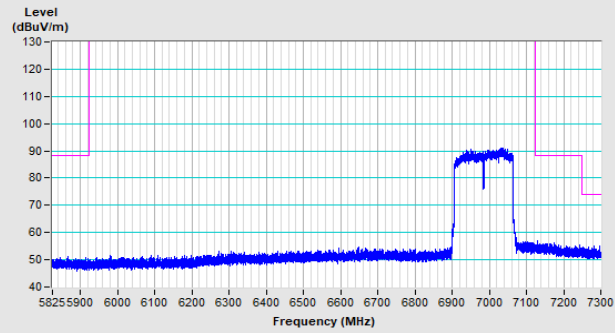


Horizontal (Peak)

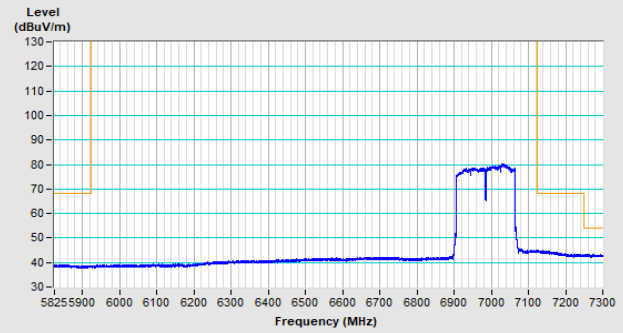

Horizontal (Average)

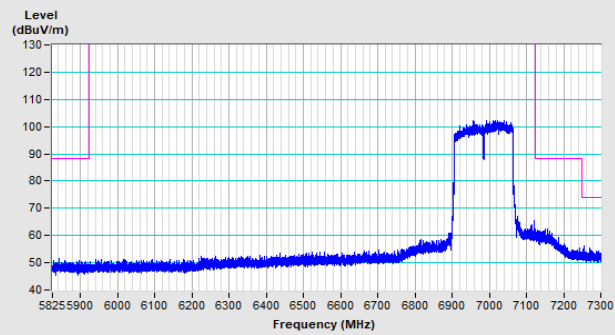


Vertical (Peak)

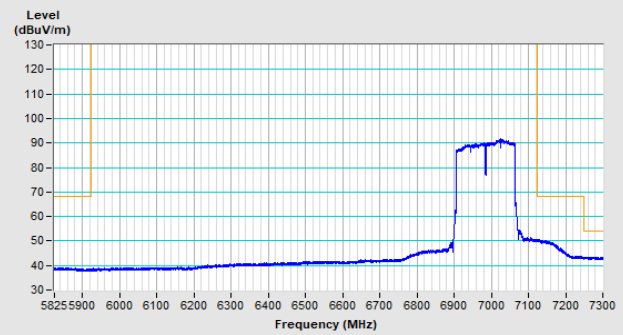


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

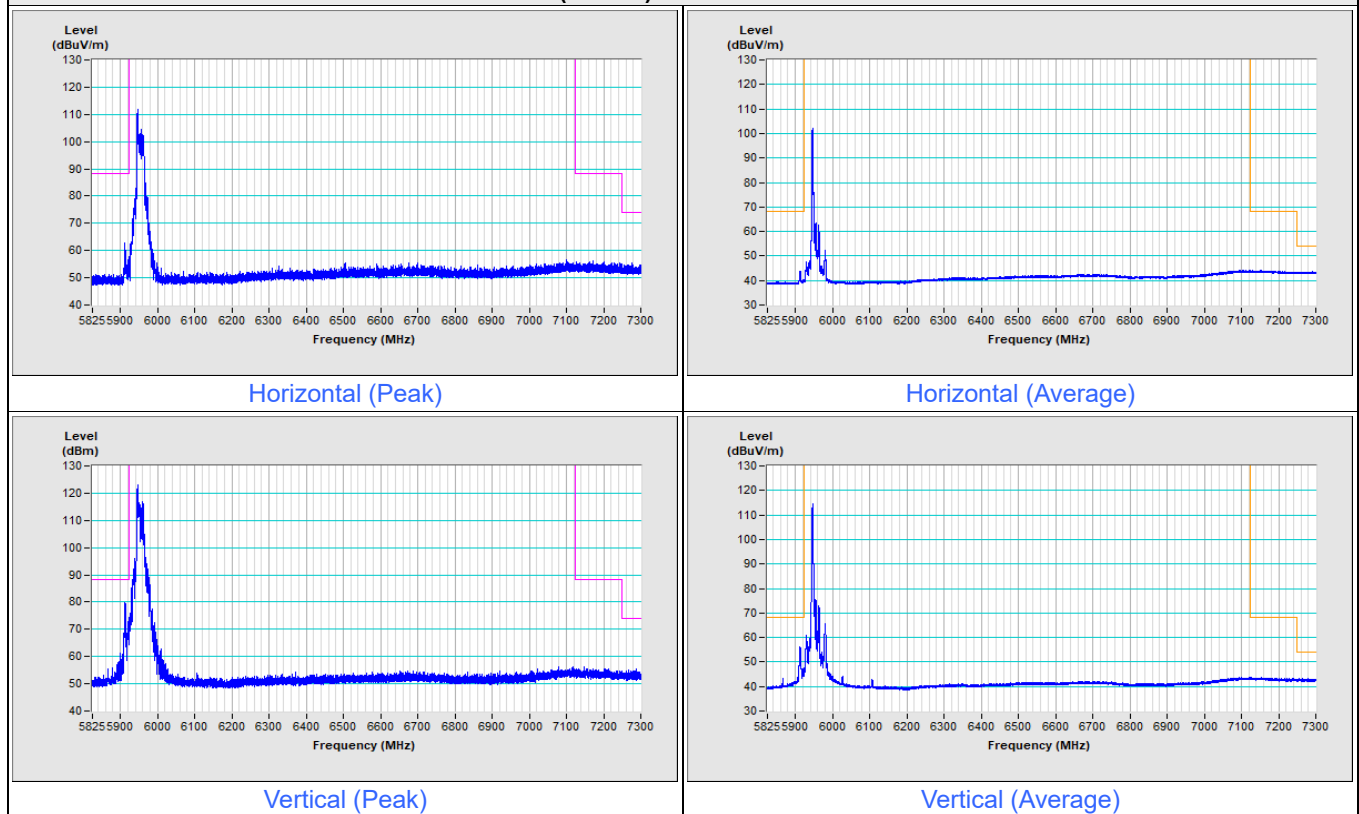

802.11be (EHT20) 26-tone RU Channel 233

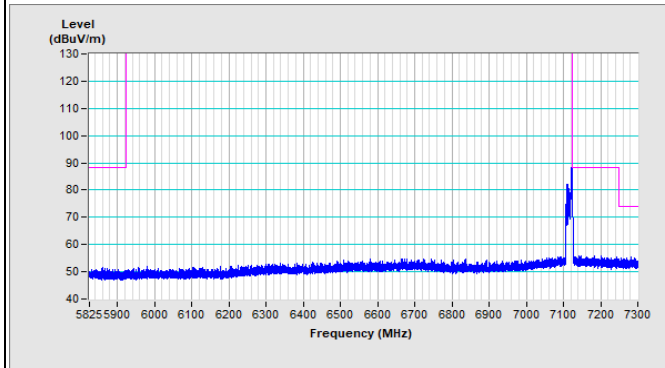


Horizontal (Peak)

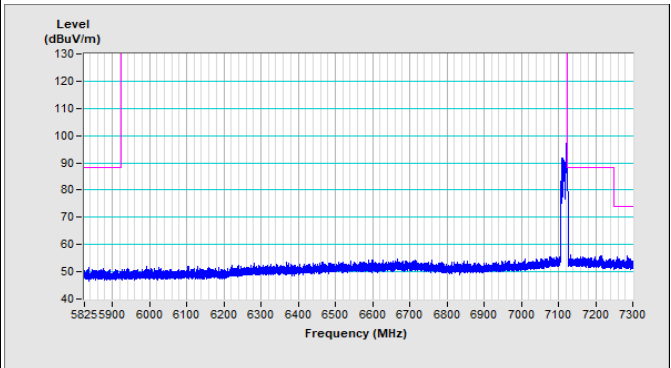


Vertical (Peak)

For Integration method:

802.11be (EHT20) 26-tone RU Channel 233

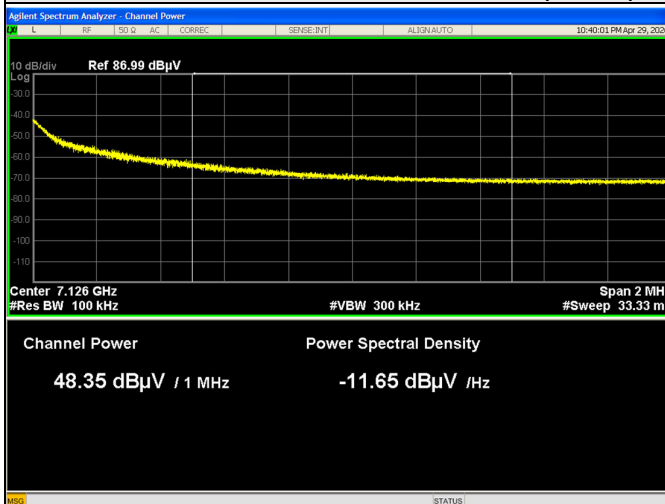


Horizontal (Average)

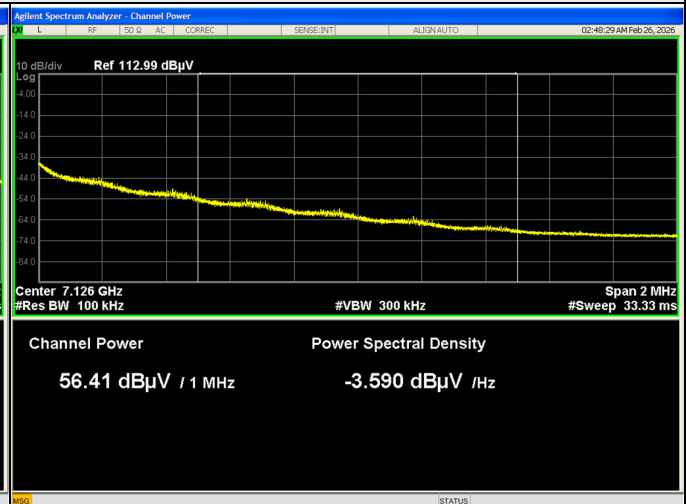


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

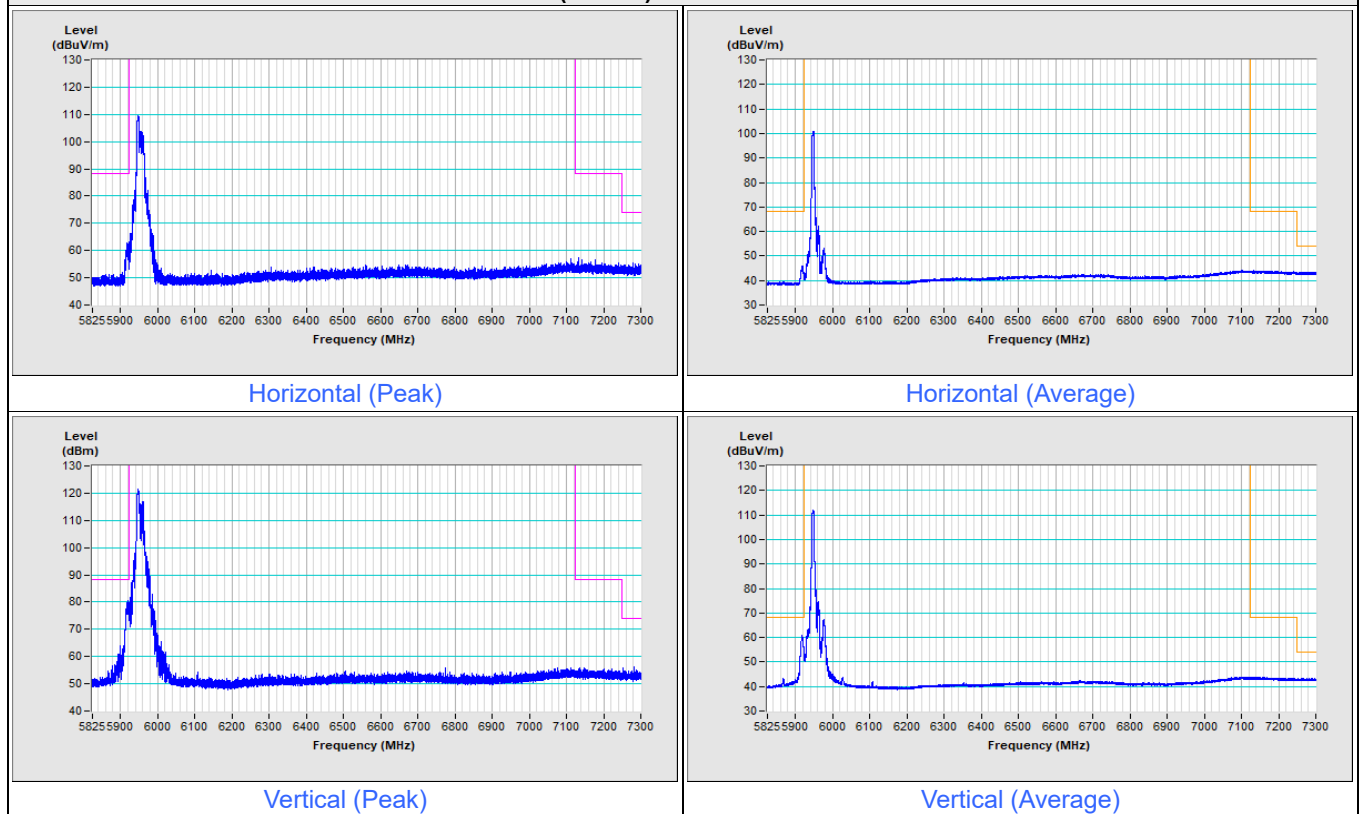

802.11be (EHT20) 52-tone RU Channel 233

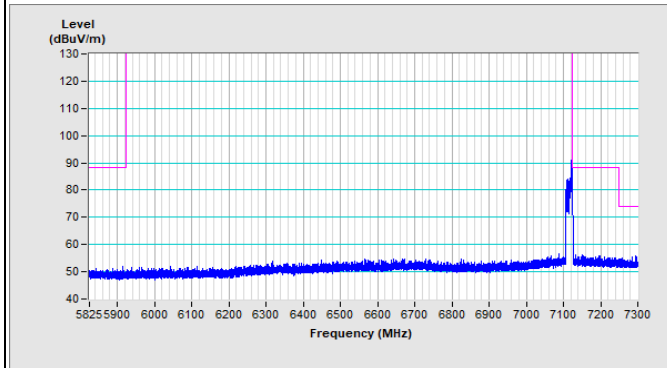


Horizontal (Peak)

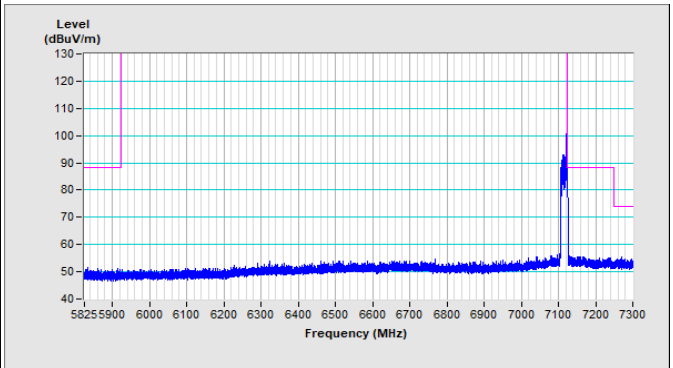


Vertical (Peak)

For Integration method:

802.11be (EHT20) 52-tone RU Channel 233

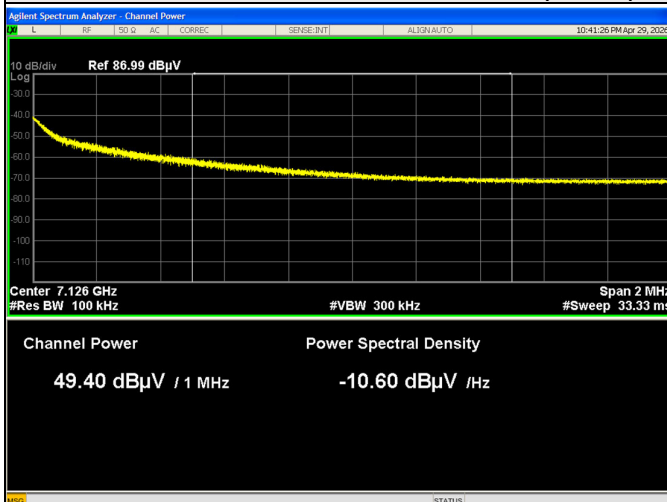


Horizontal (Average)

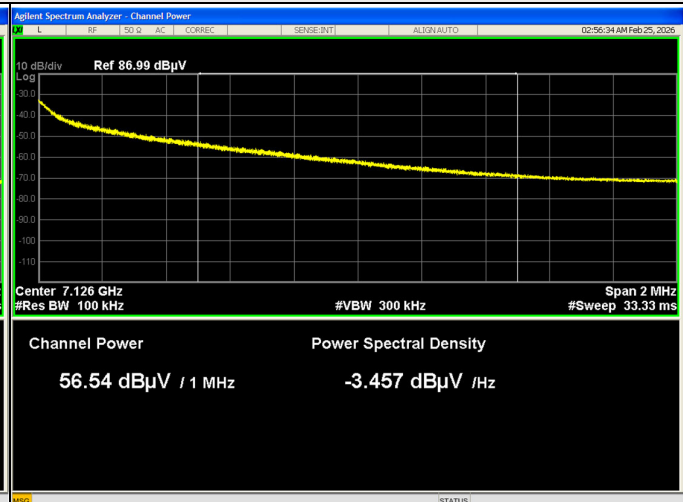


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

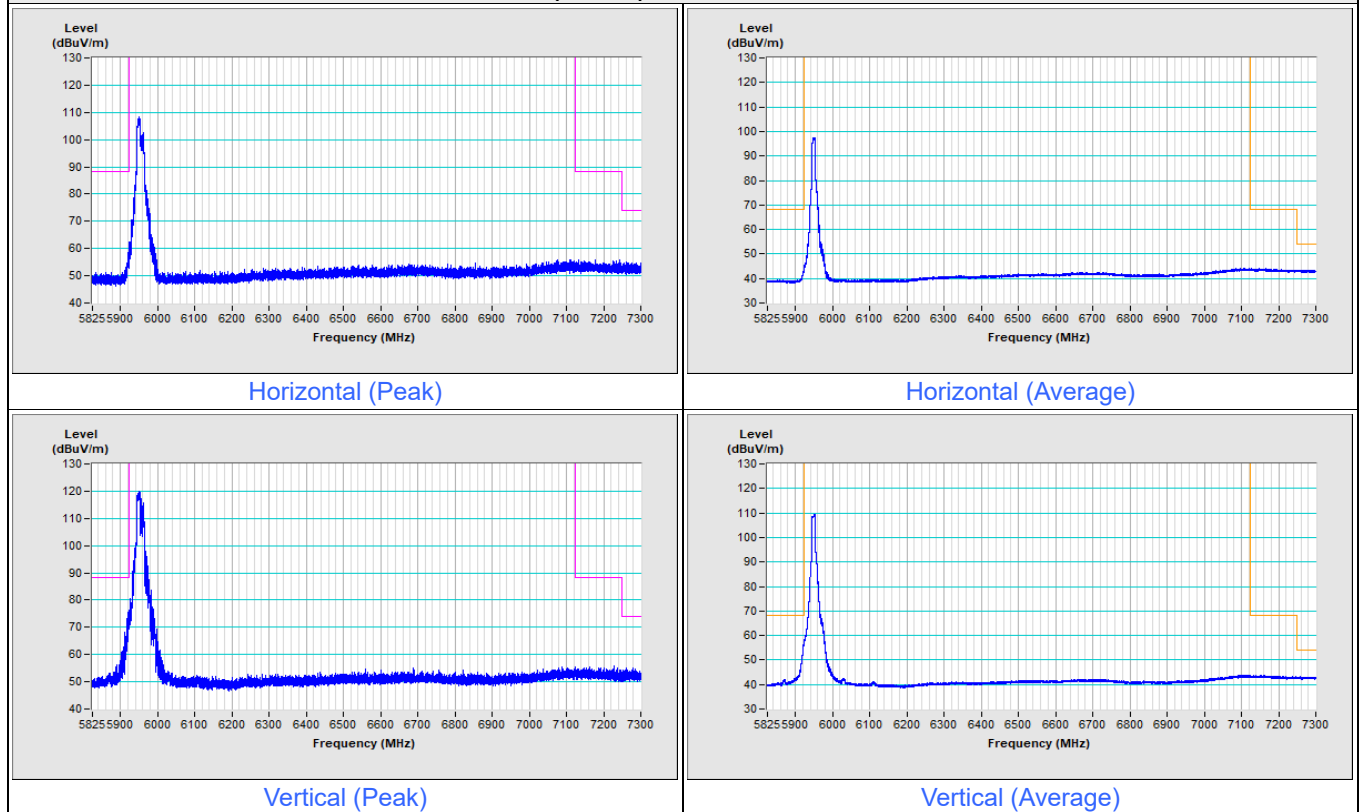

802.11be (EHT20) 106-tone RU Channel 233

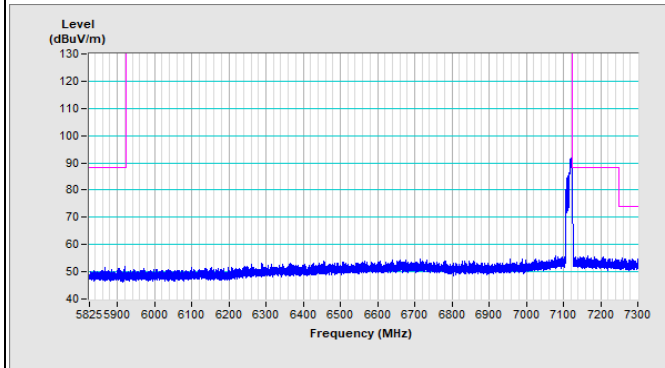

Horizontal (Peak)

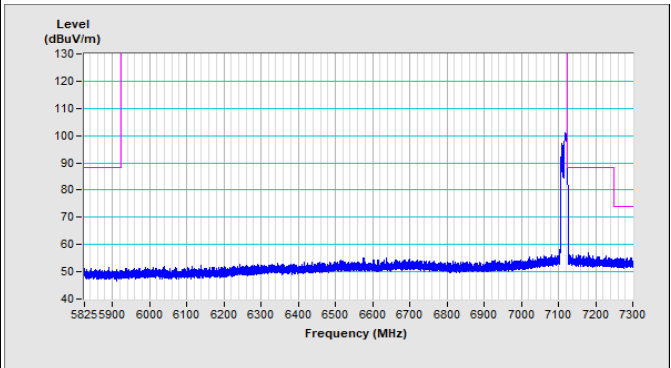


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106-tone RU Channel 233




Horizontal (Average)

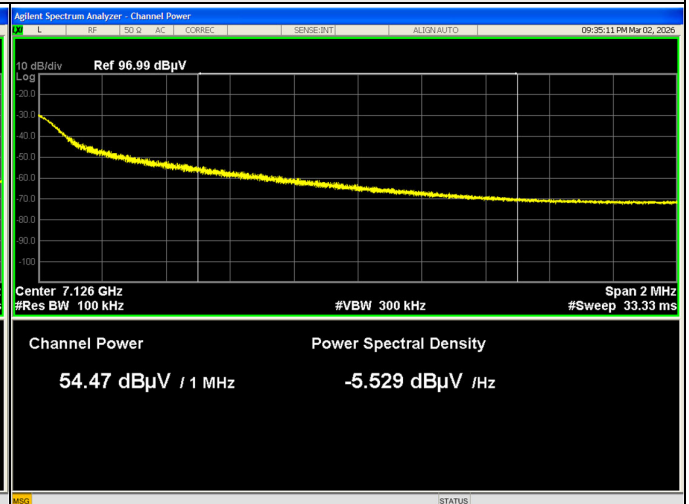


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

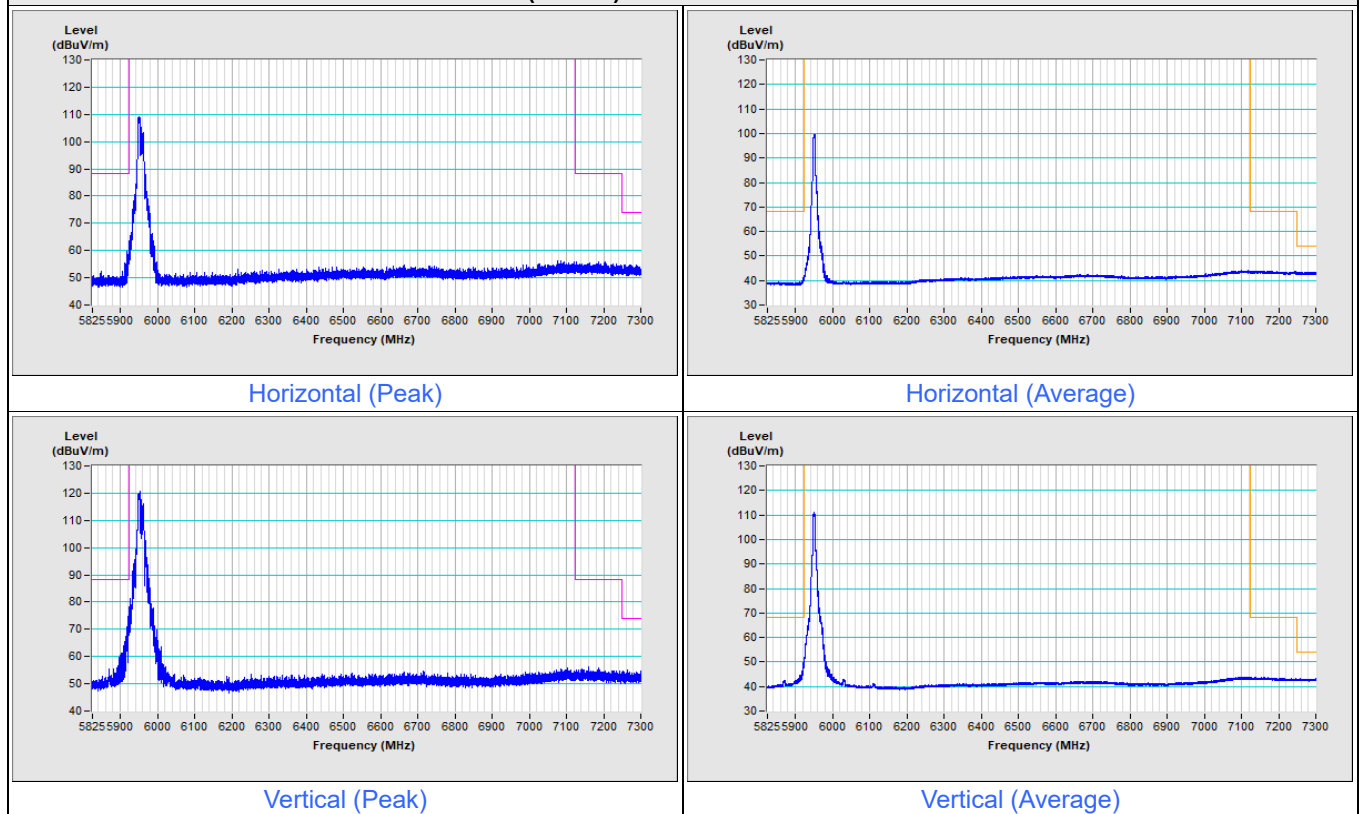


802.11be (EHT20) 52+26-tone MRU Channel 233

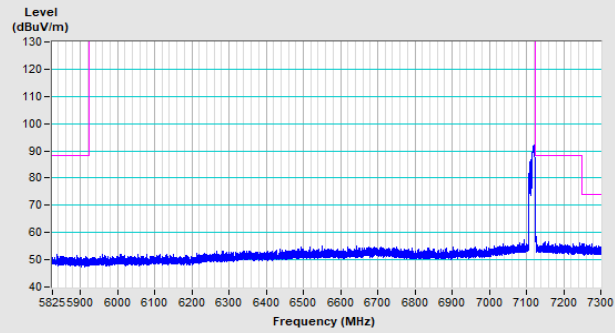


Horizontal (Peak)

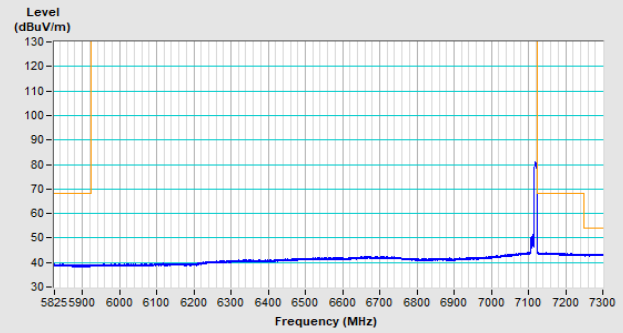

Horizontal (Average)

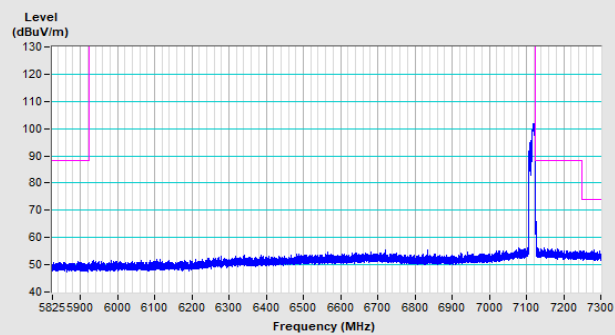


Vertical (Peak)

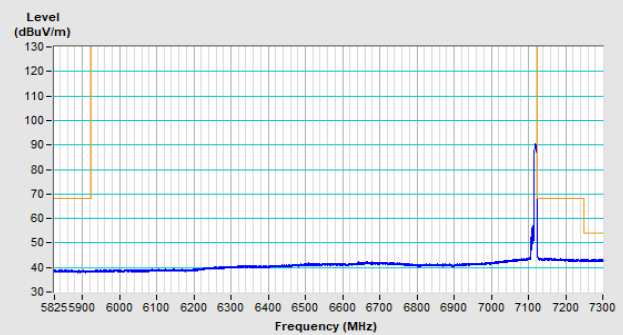


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

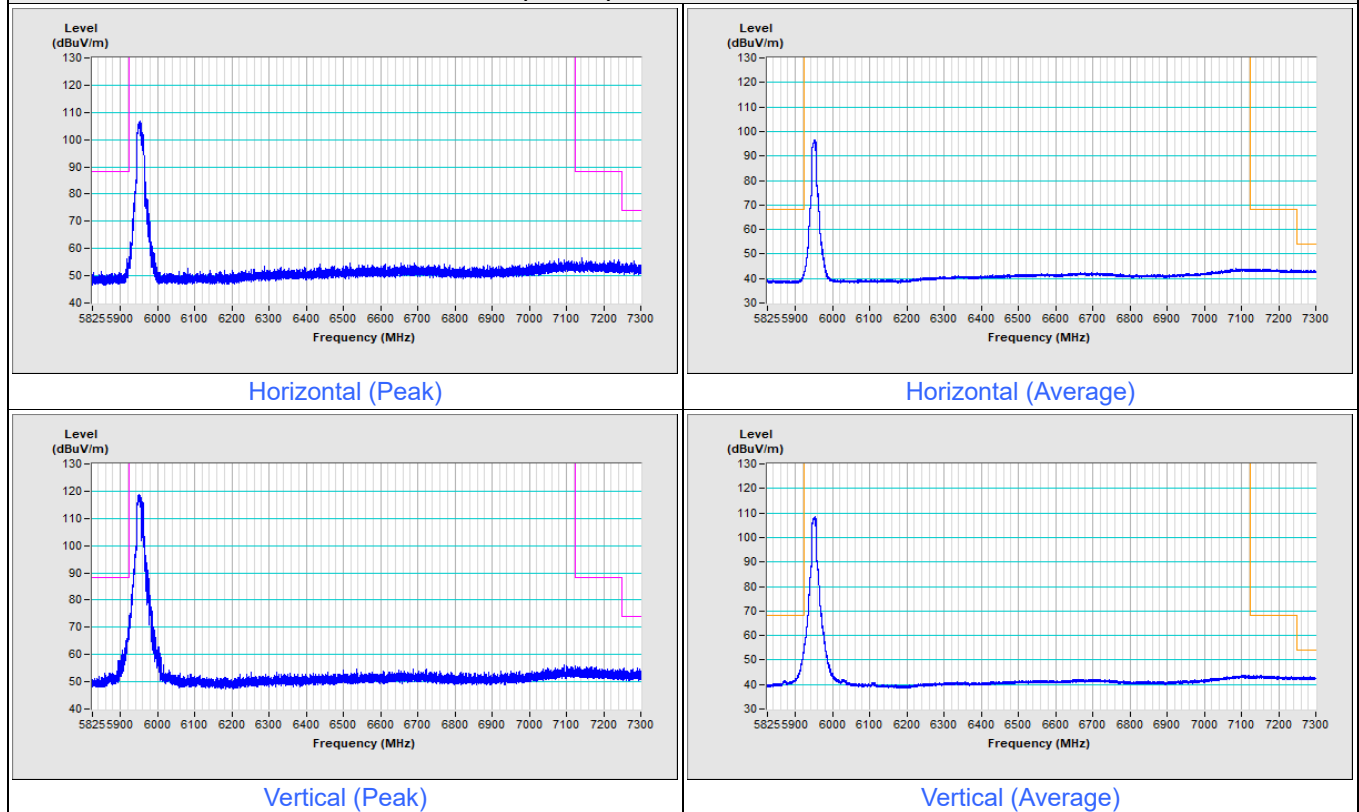

802.11be (EHT20) 106+26-tone MRU Channel 233

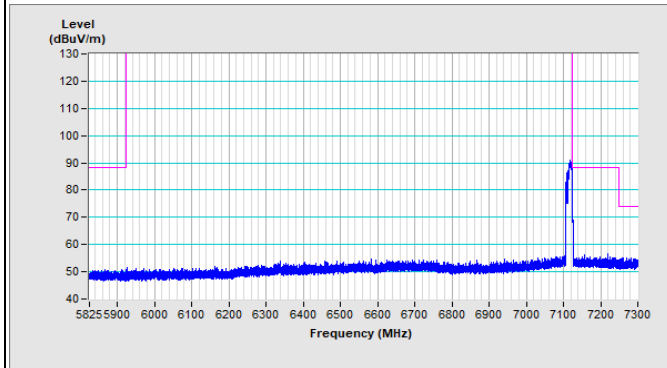

Horizontal (Peak)

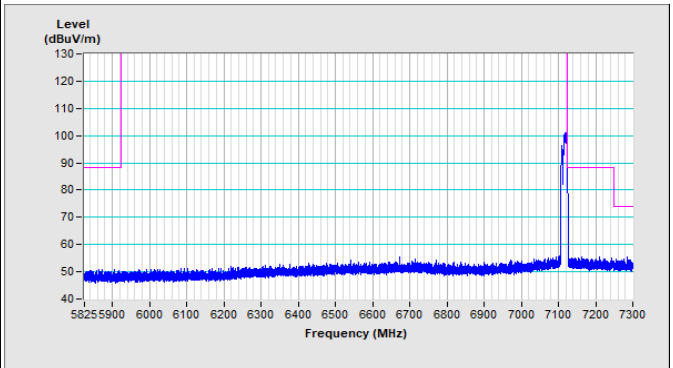


Vertical (Peak)

For Integration method:

802.11be (EHT20) 106+26-tone MRU Channel 233




Horizontal (Average)

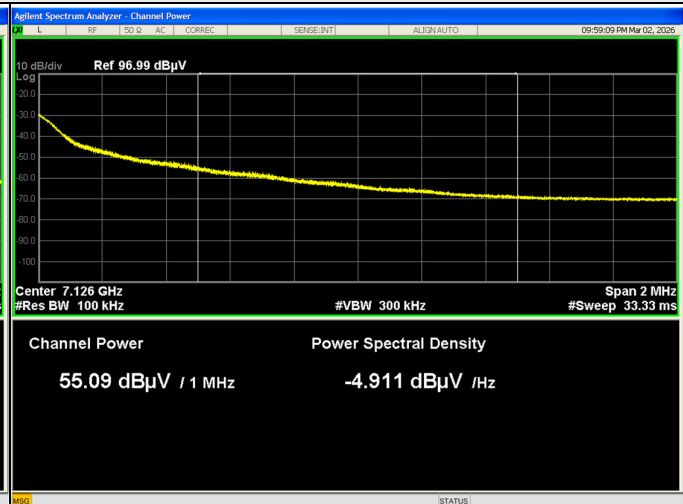


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 7

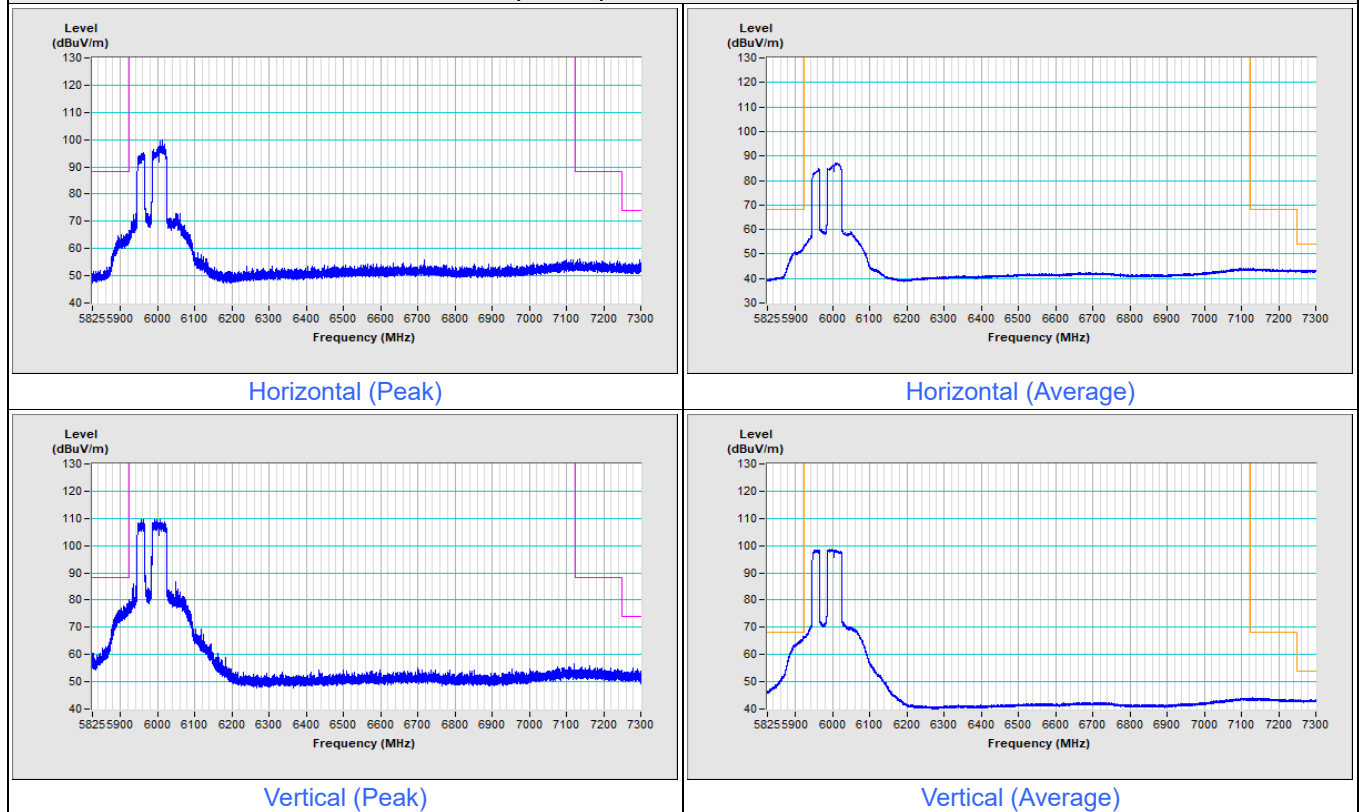


802.11be (EHT80) 484+242-tone MRU Channel 215

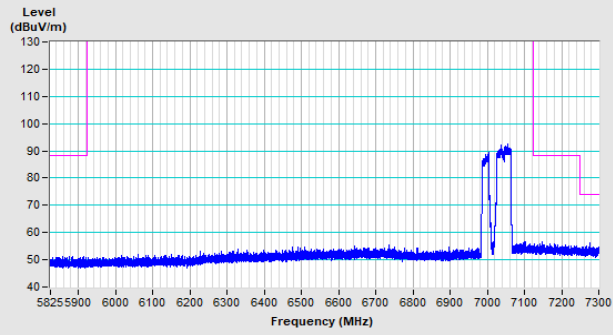


Horizontal (Peak)

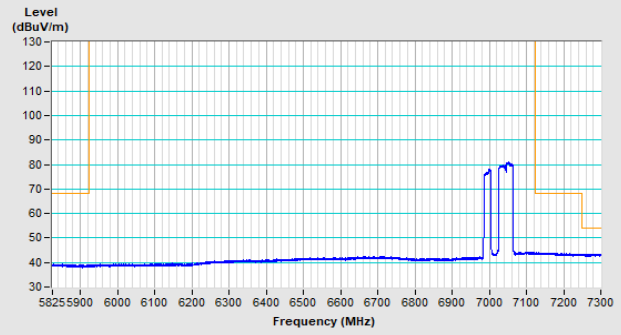

Horizontal (Average)

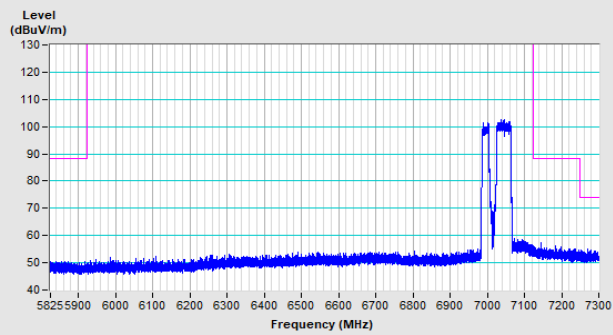


Vertical (Peak)

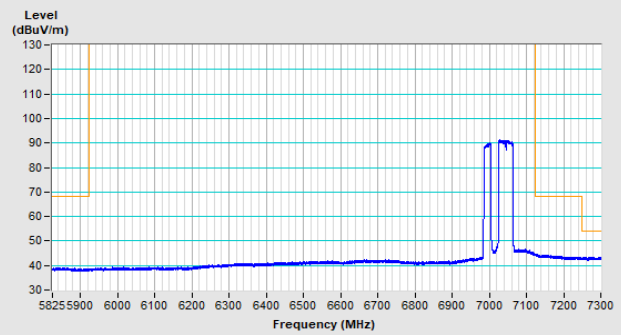


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484-tone MRU Channel 15

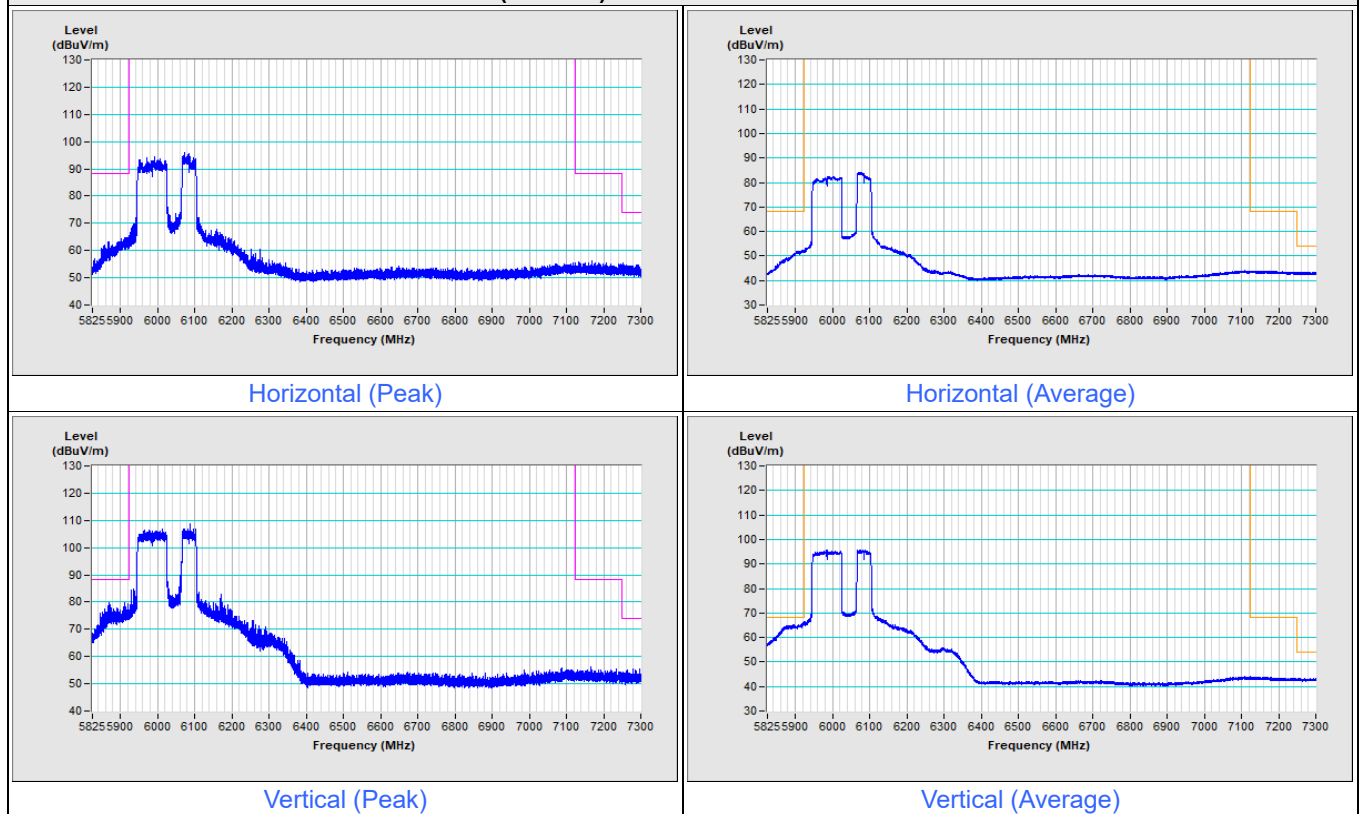


802.11be (EHT160) 996+484-tone MRU Channel 207

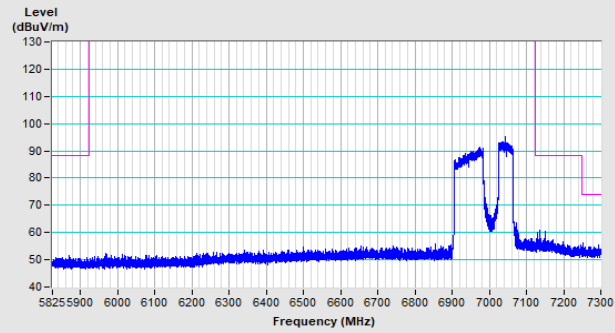


Horizontal (Peak)

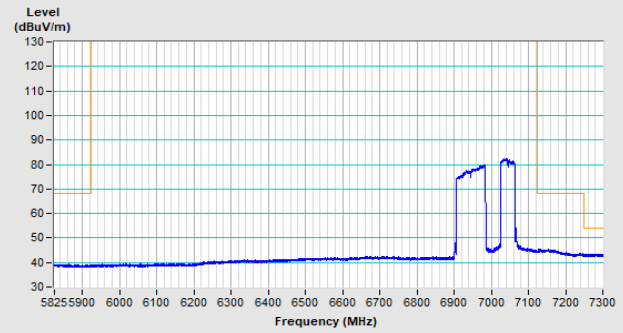

Horizontal (Average)

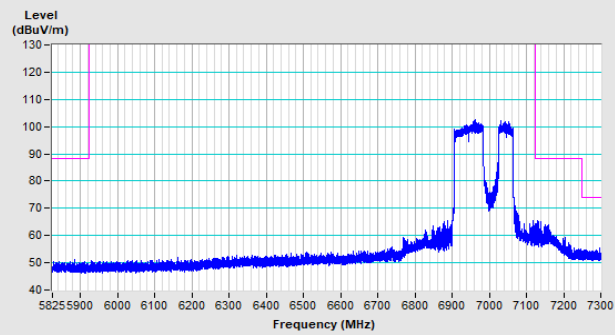


Vertical (Peak)

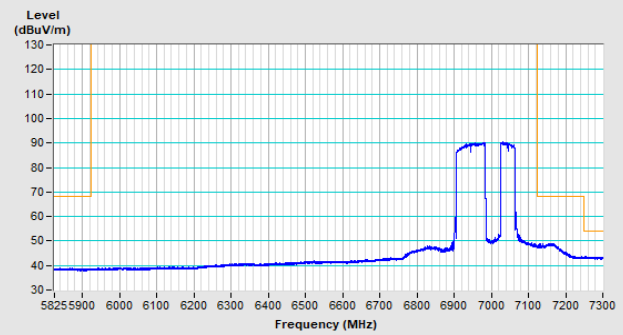


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) 996+484+242-tone MRU Channel 15

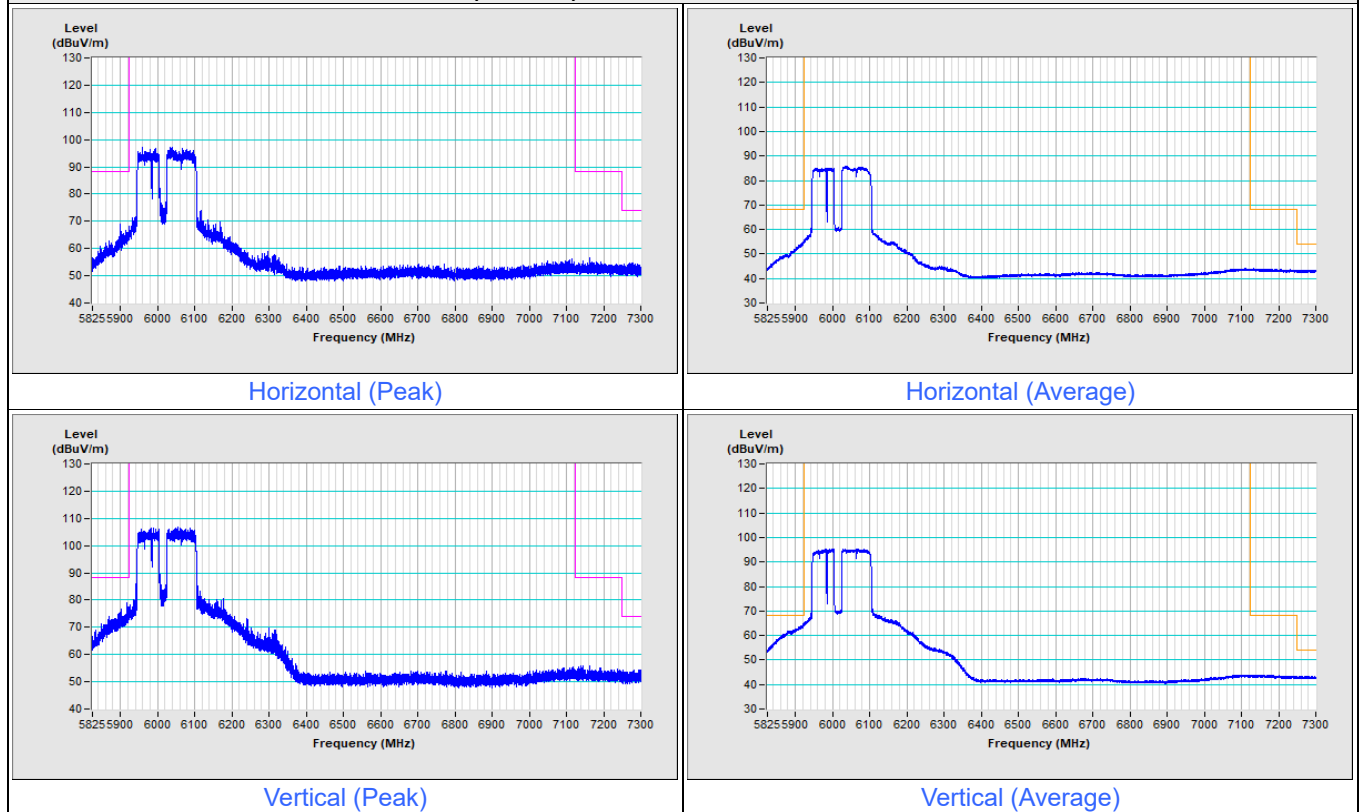


802.11be (EHT160) 996+484+242-tone MRU Channel 207

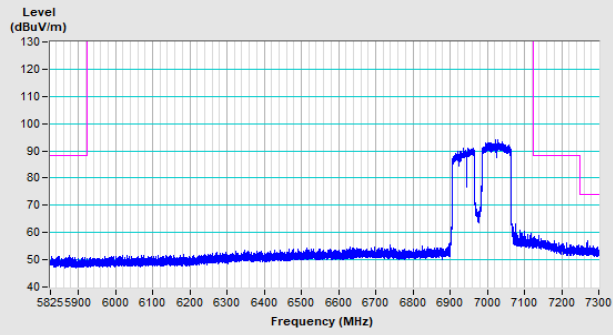


Horizontal (Peak)

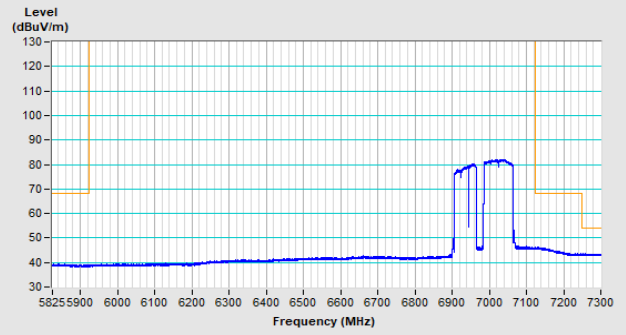

Horizontal (Average)

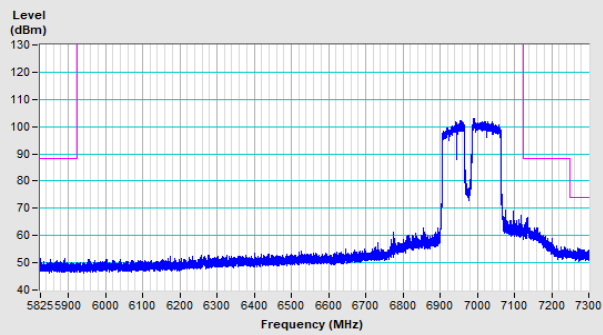

Vertical (Peak)

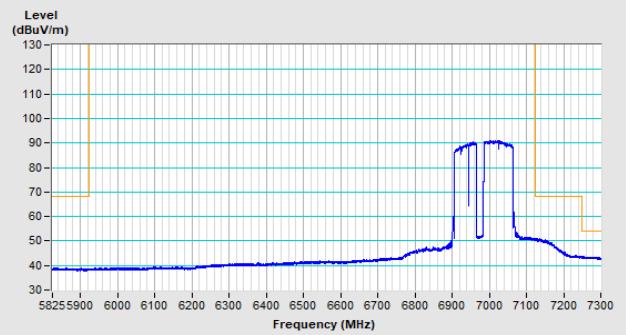


Vertical (Average)

Plot of Other Emission

Mode A

2Tx

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

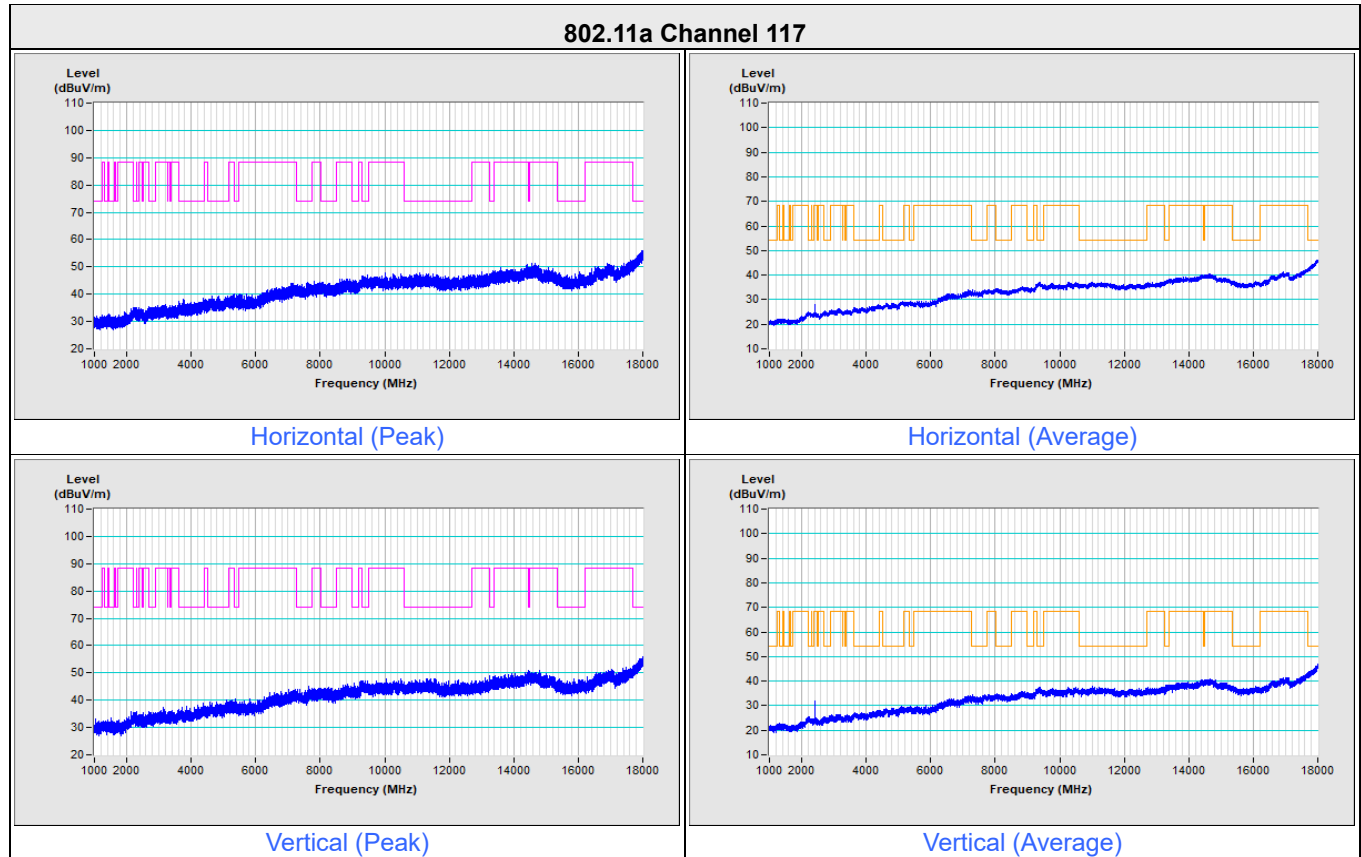


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

2Tx NSS2


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

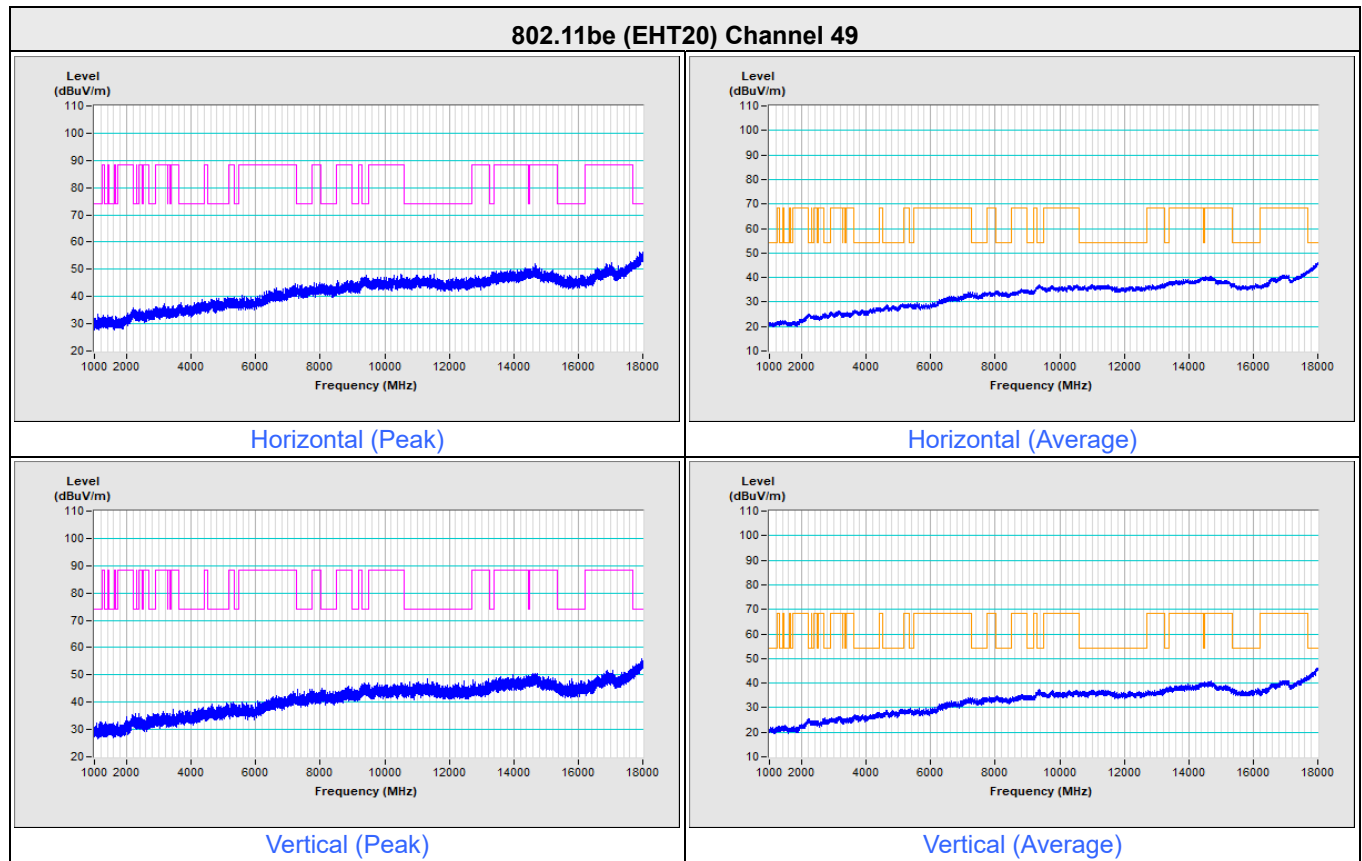

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

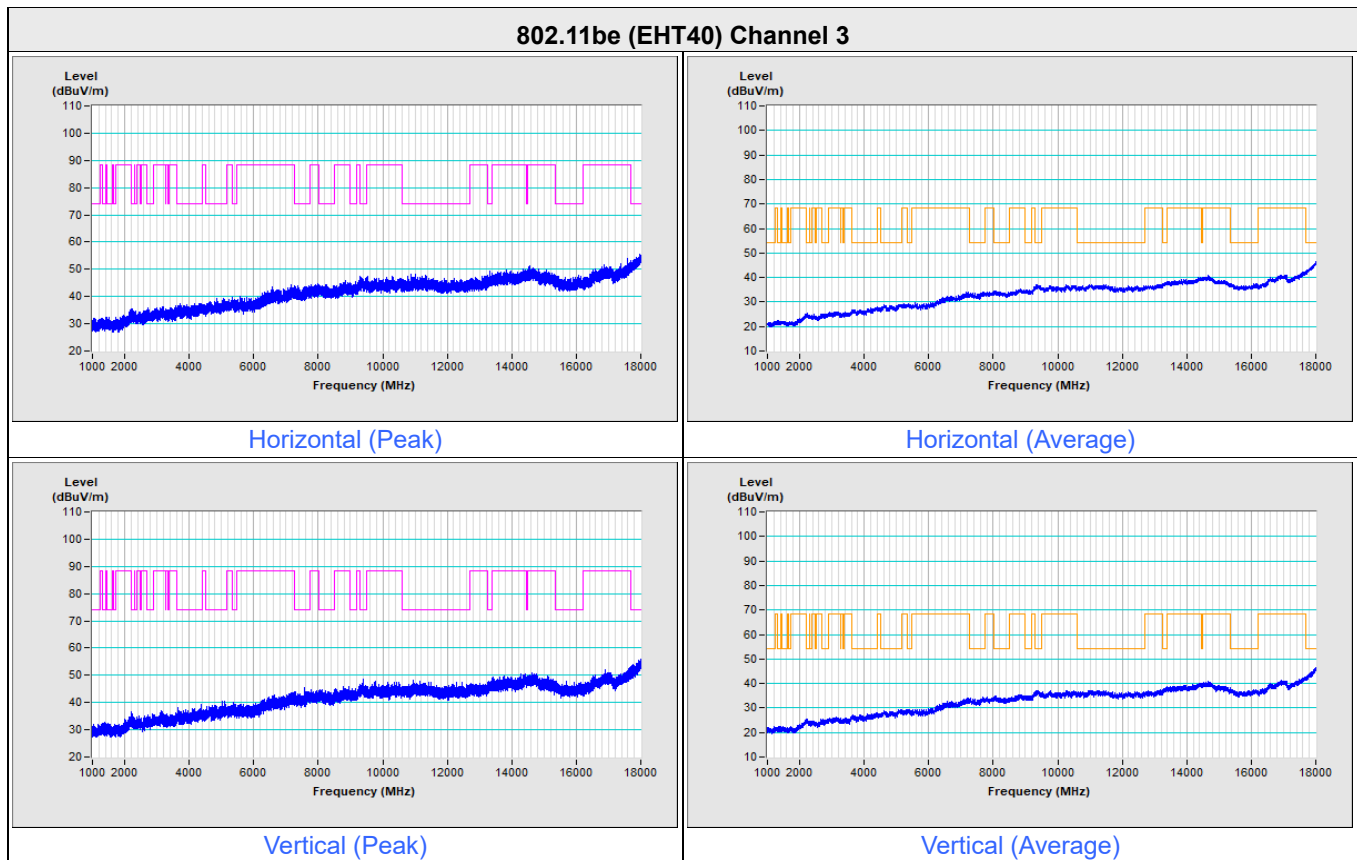

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

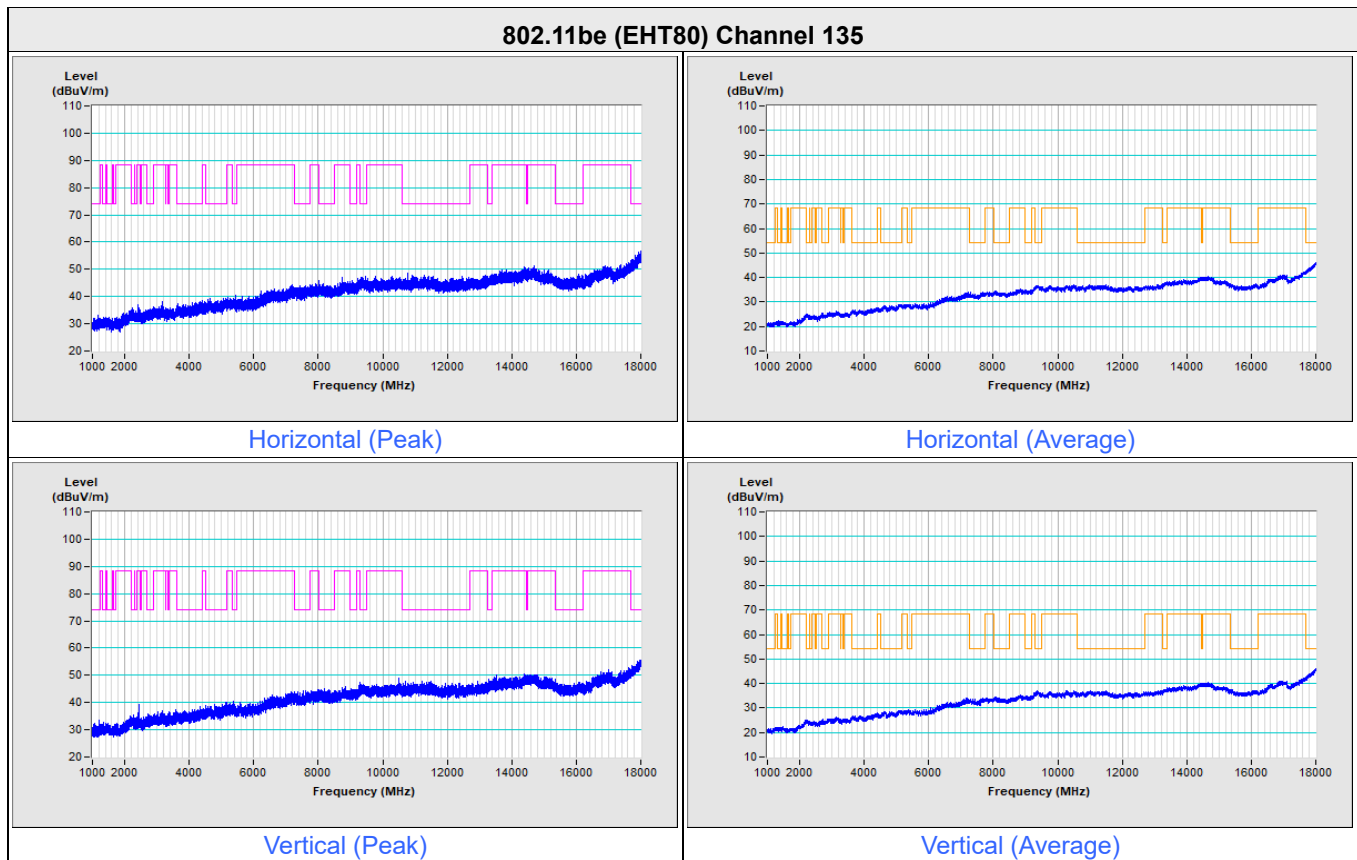

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	----------------	-------------------------------	--

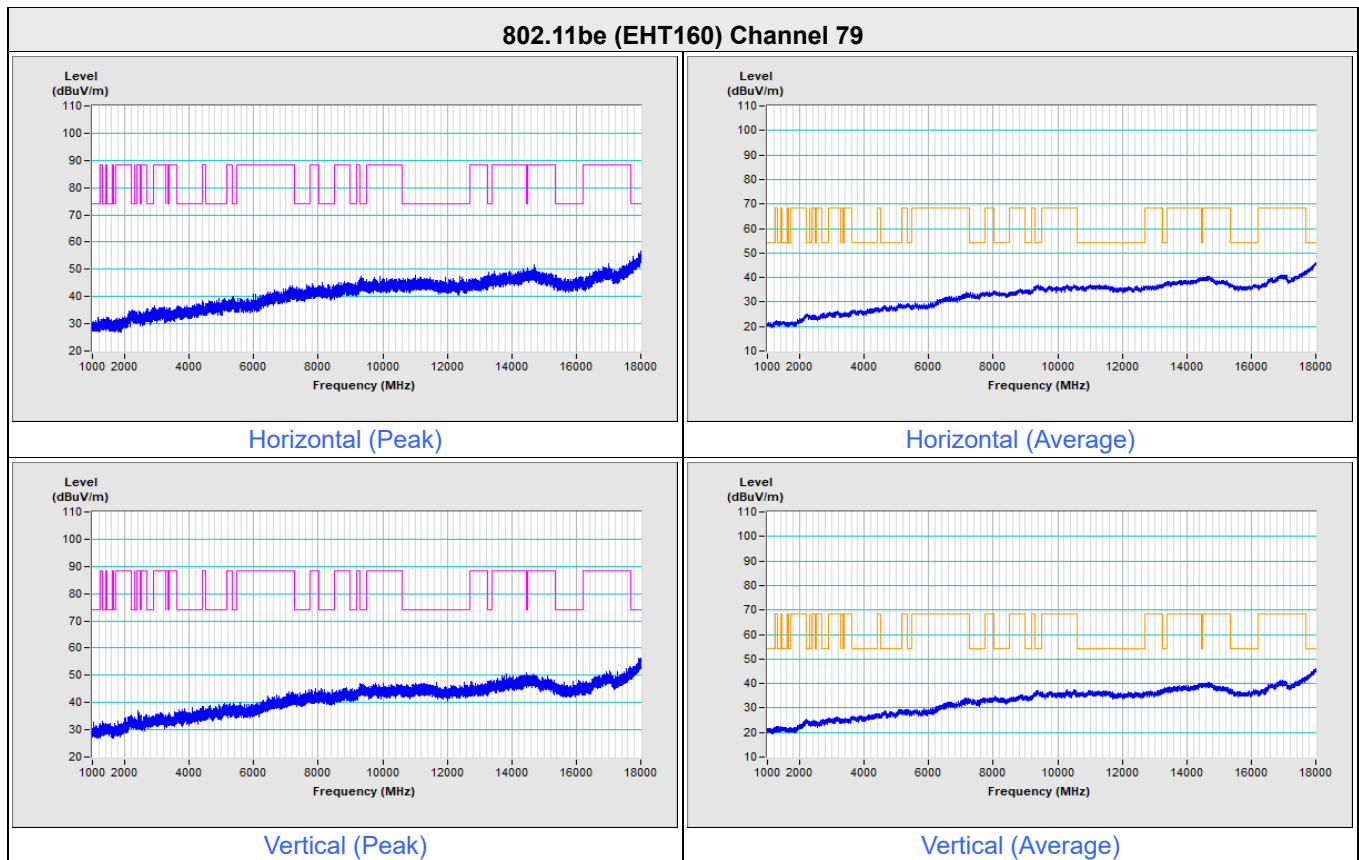

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

7.10 TPC mechanism


Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Cheng
--------------	---------	---------------------------	--------------	------------	------------

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	Sensitivity	Conducted PSD (dBm/MHz)		Total PSD (dBm/MHz)	Directional Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)	Test Result
			Chain 0	Chain 1					
47	6185	Low RSSI	-16.39	-16.89	-13.62	5.00	-8.62	-5	Pass
		High RSSI	-25.29	-25.49	-22.38	5.00	-17.38	-11	Pass

Note: EIRP PSD (dBm/MHz) = Conducted PSD (dBm/MHz) + Directional Gain (dBi)

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
11be RTL8922DE Combo module	REALTEK	RTL8922DE	6002.24.141.0

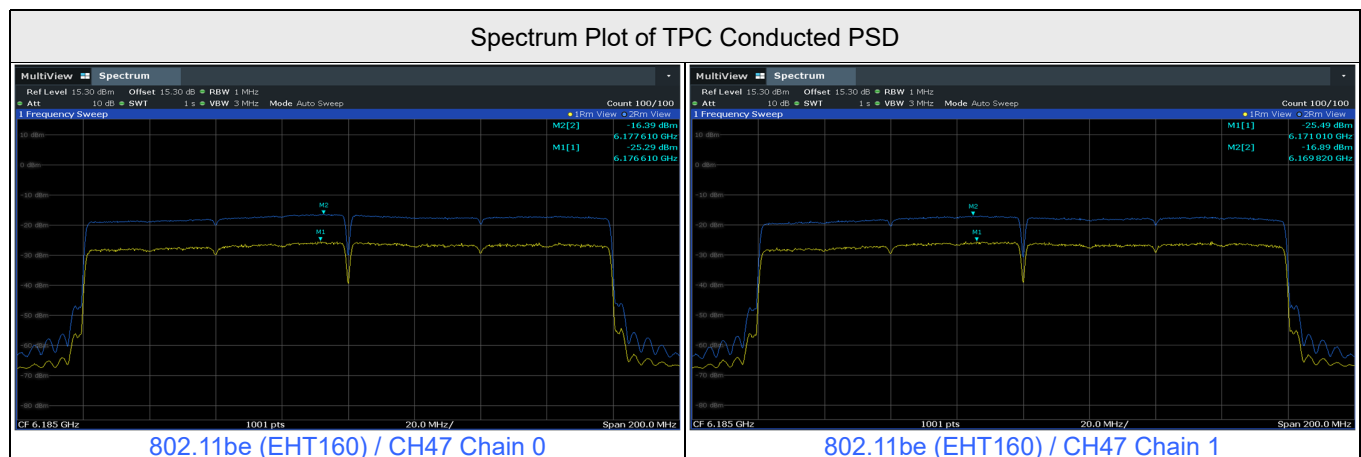

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---