



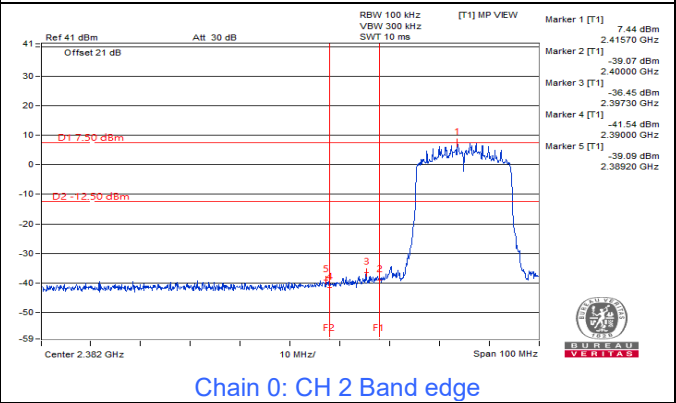
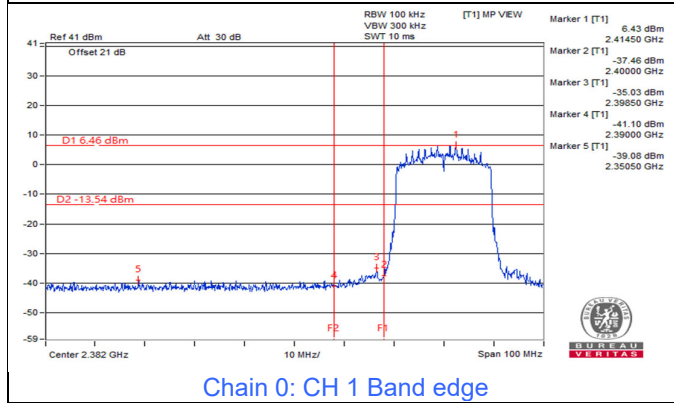
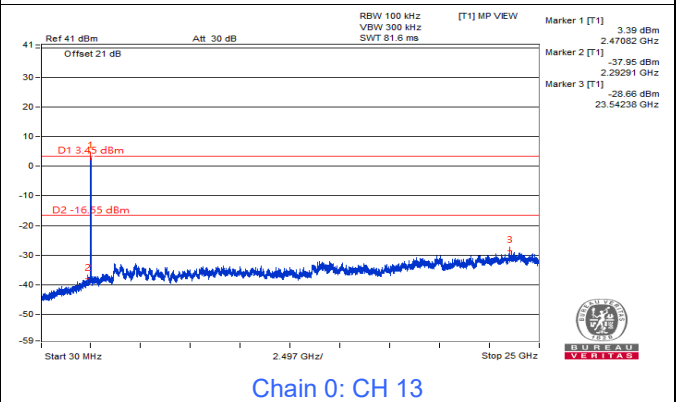
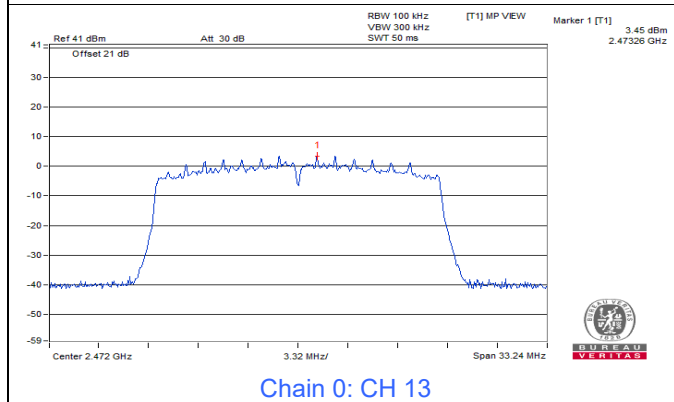
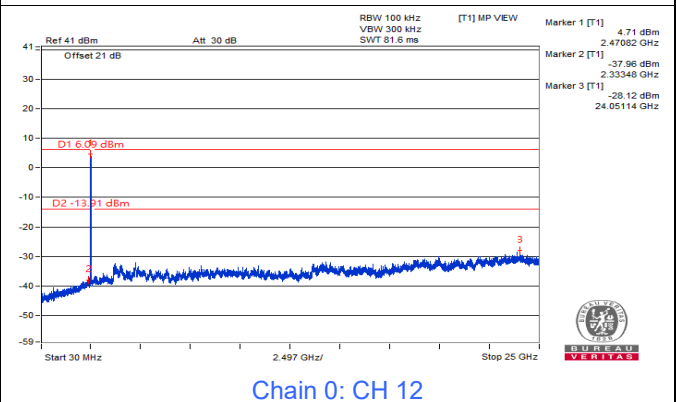
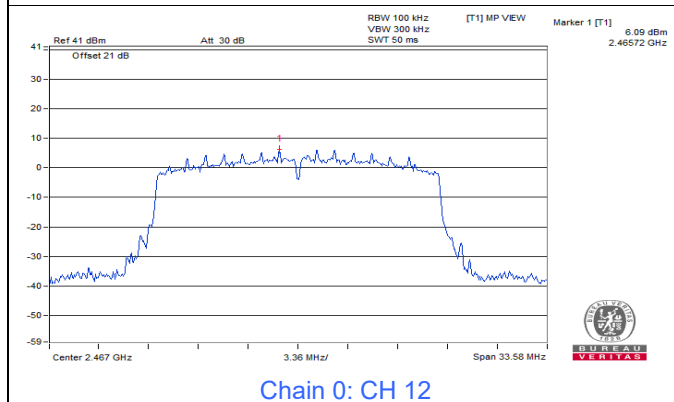
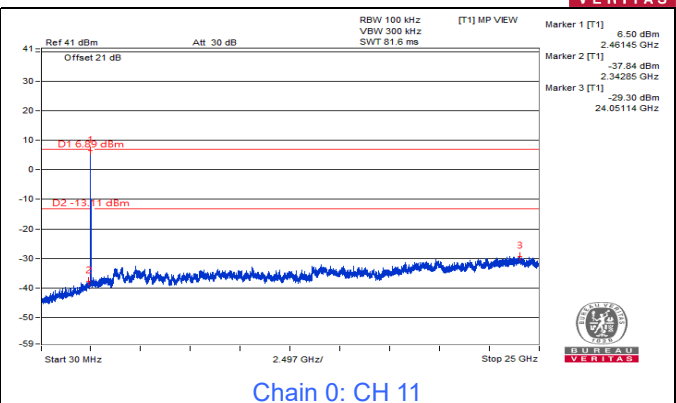
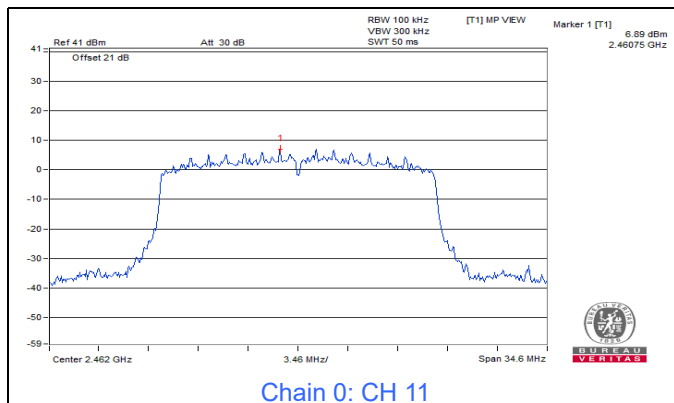
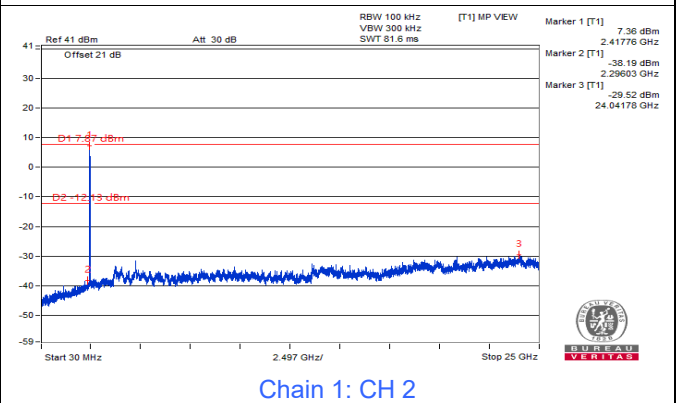
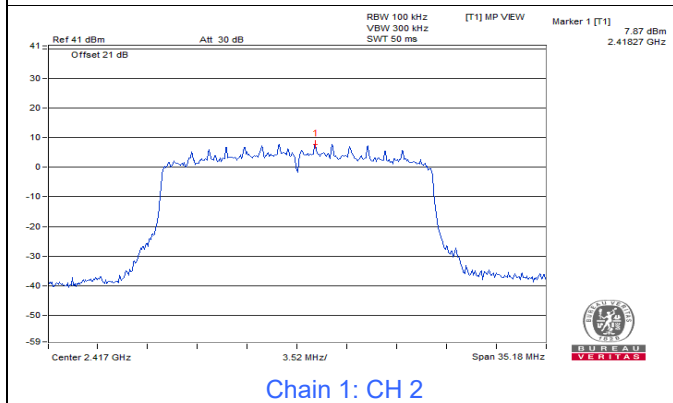
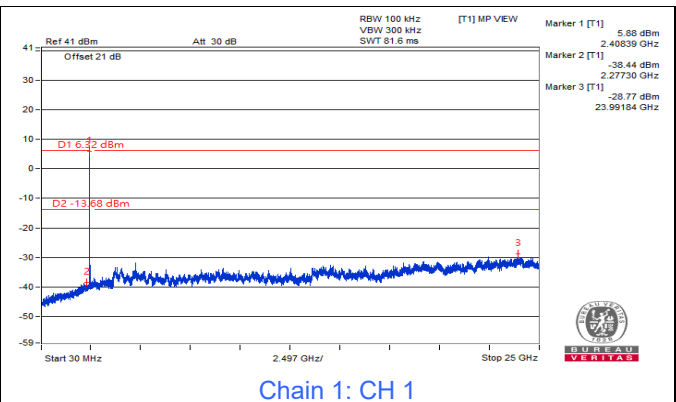
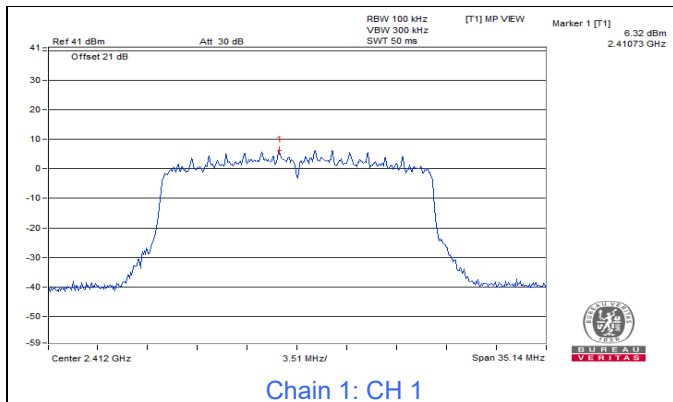
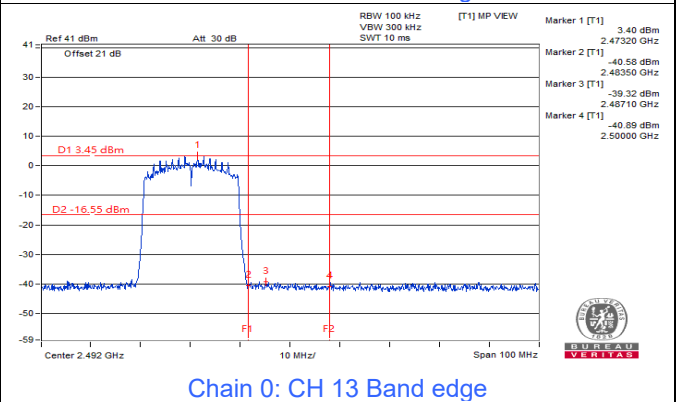
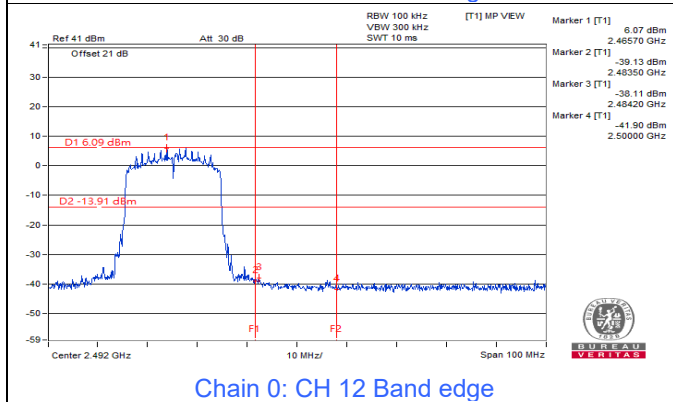
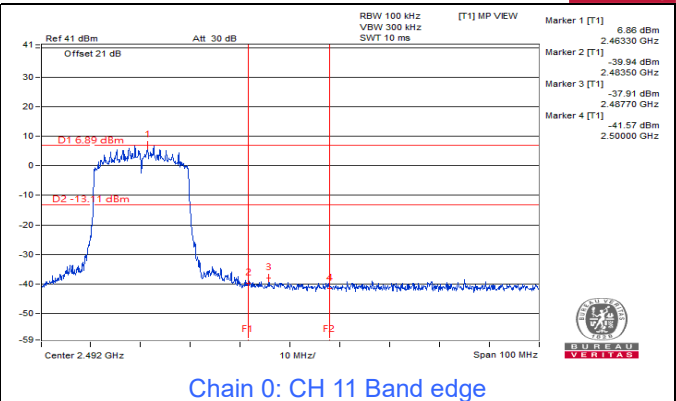
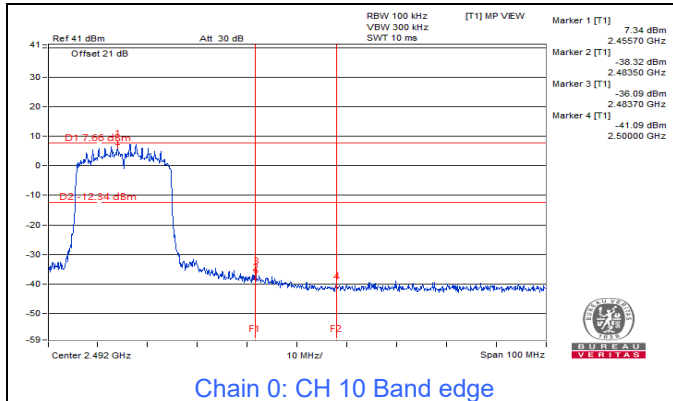
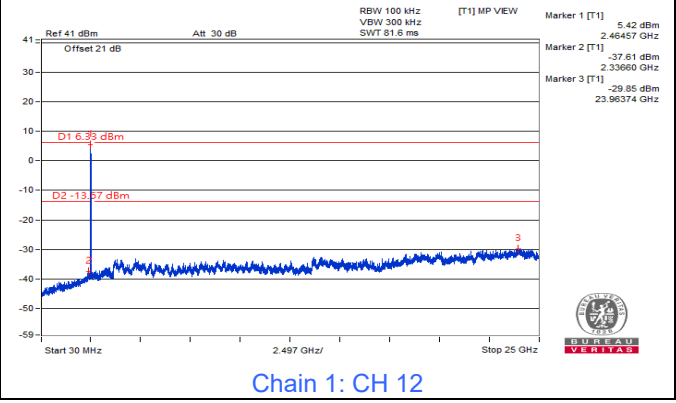
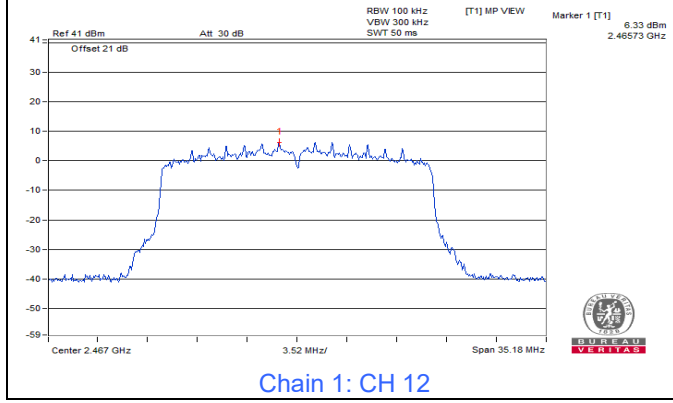
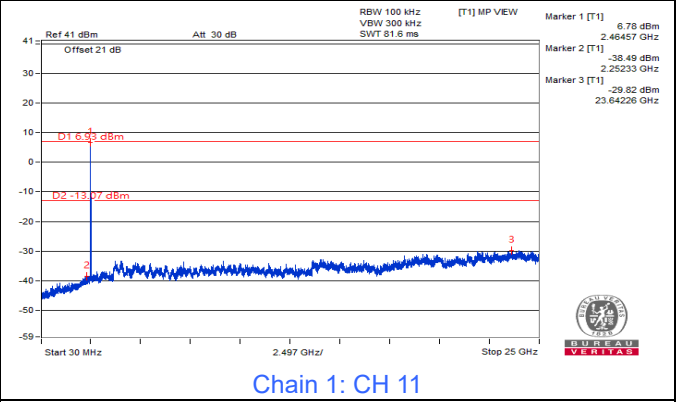
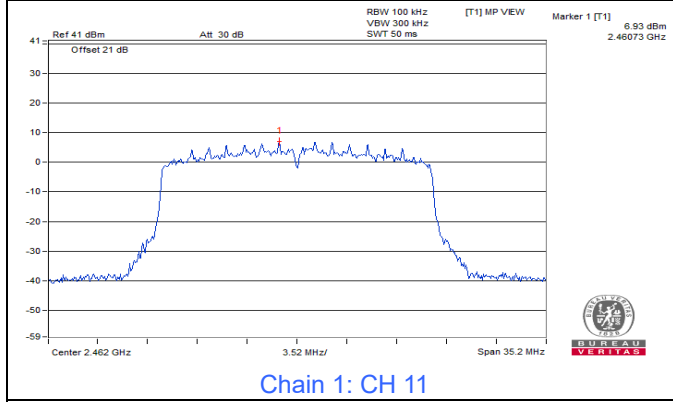
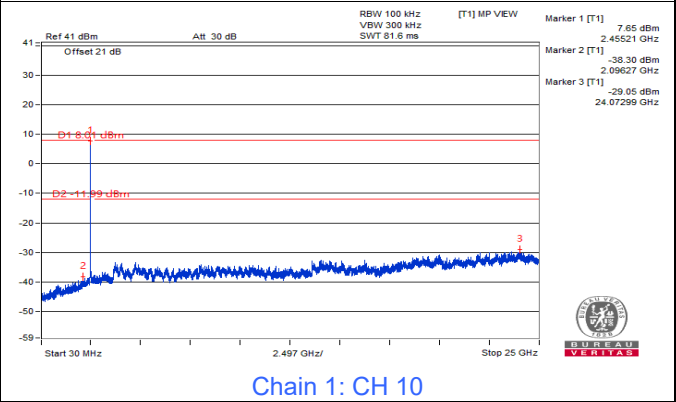


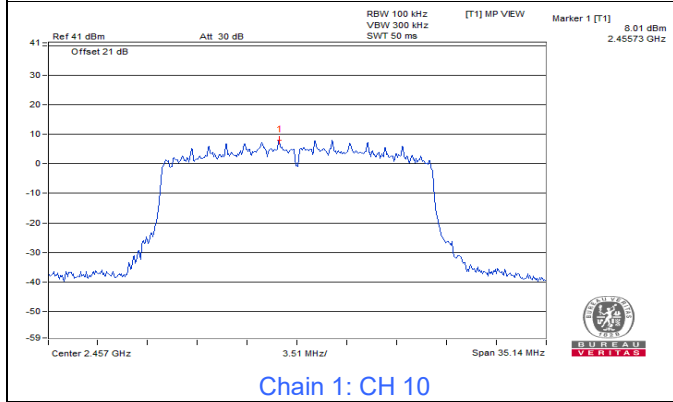

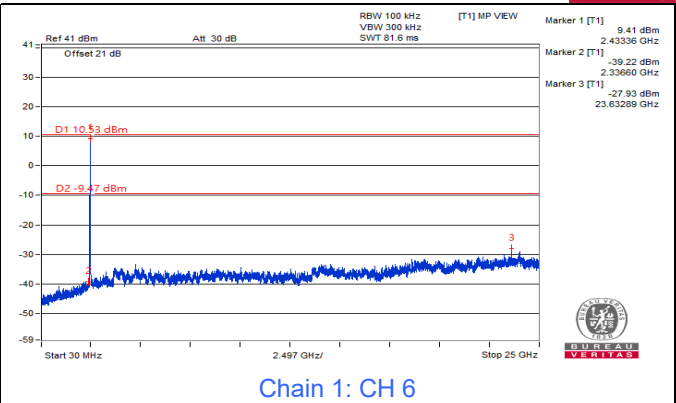

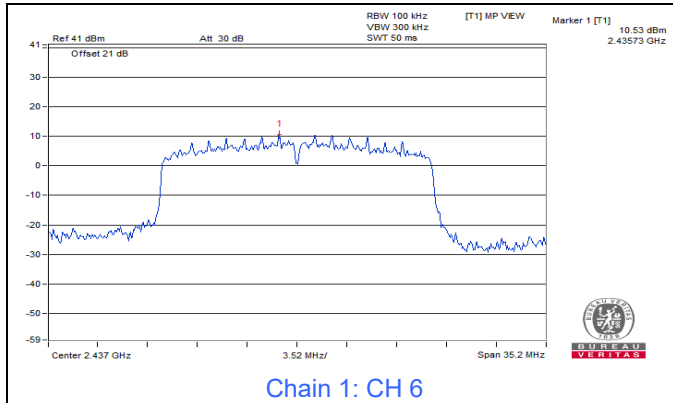








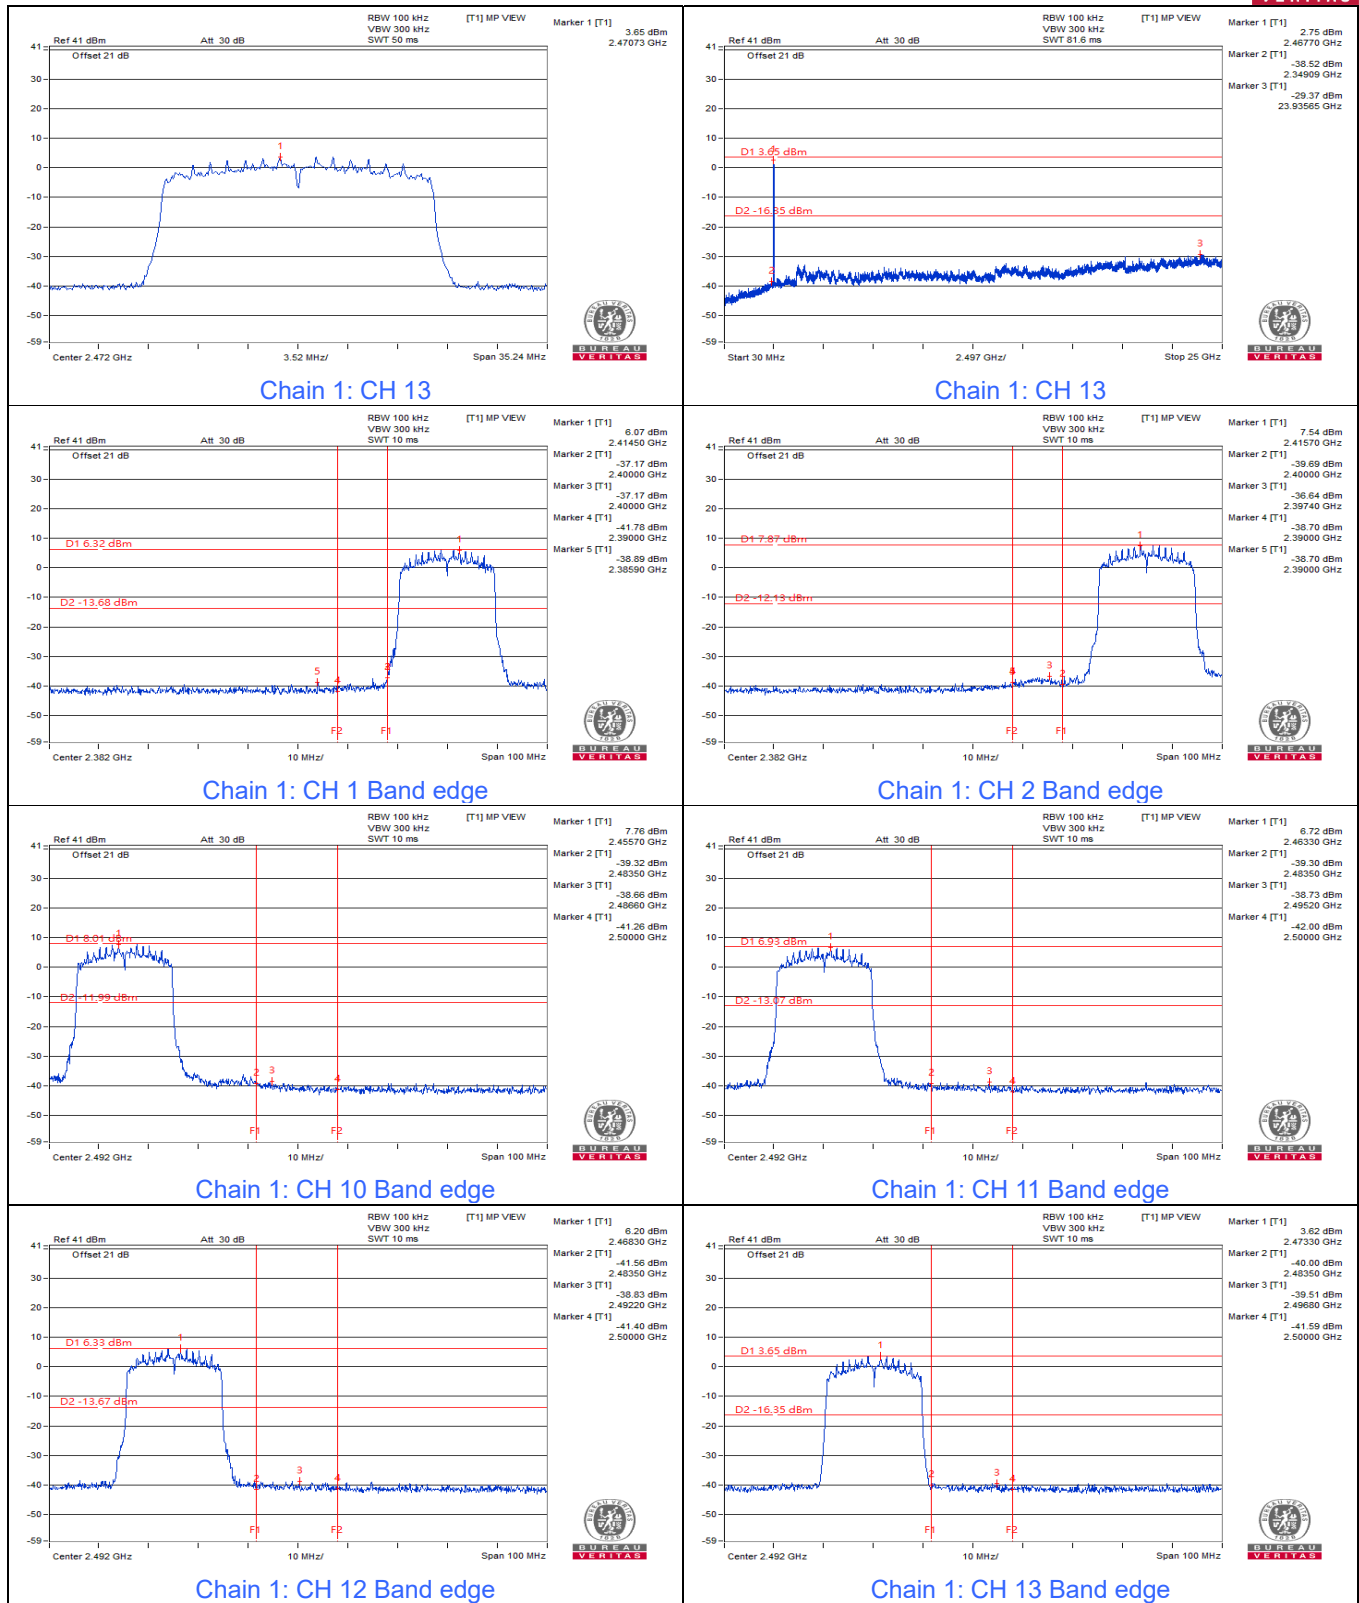



802.11be (EHT40)







BUREAU
VERITAS

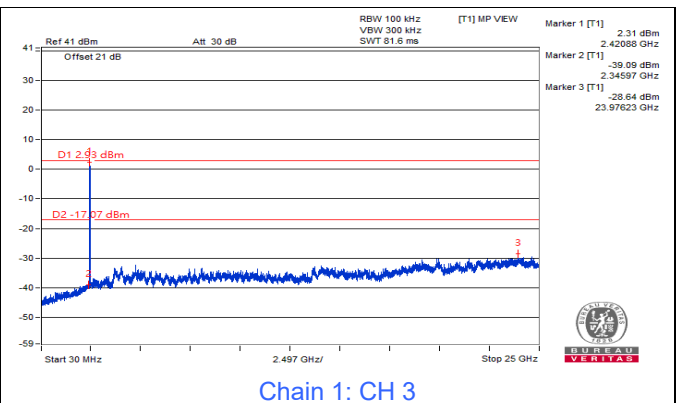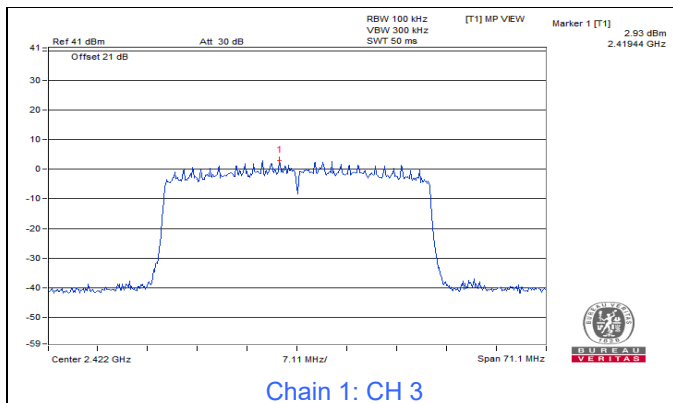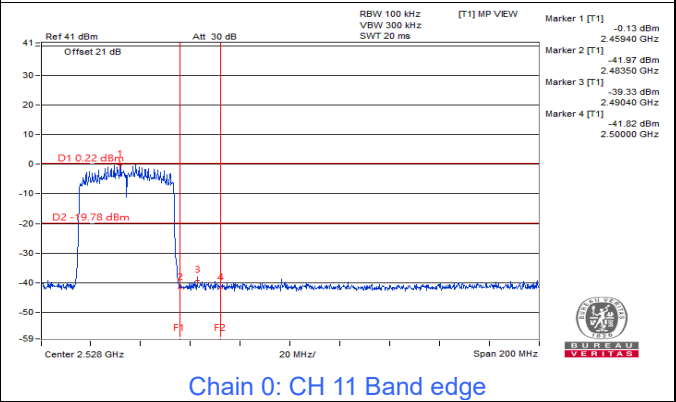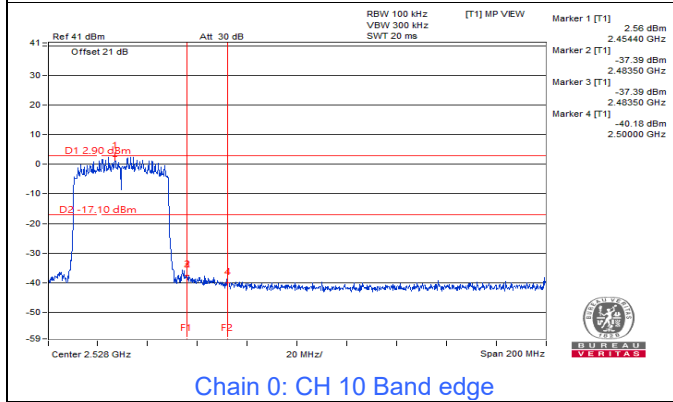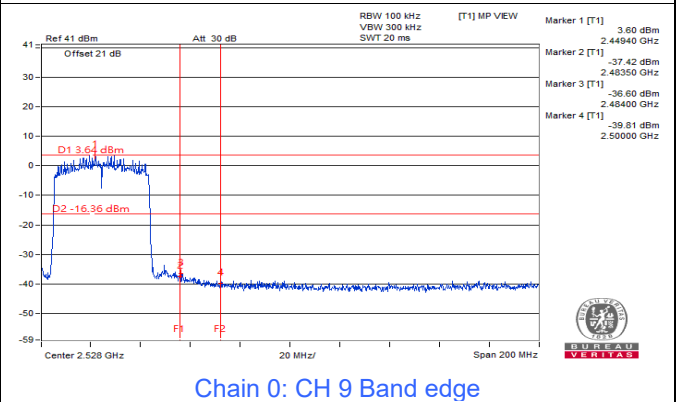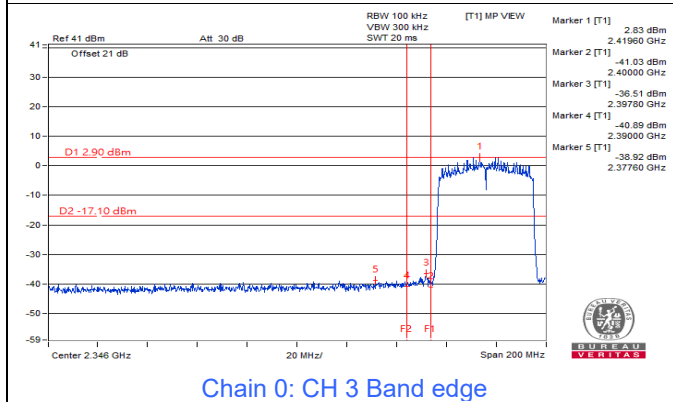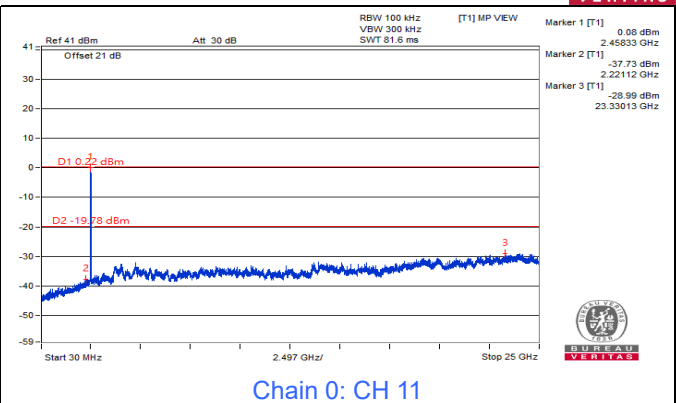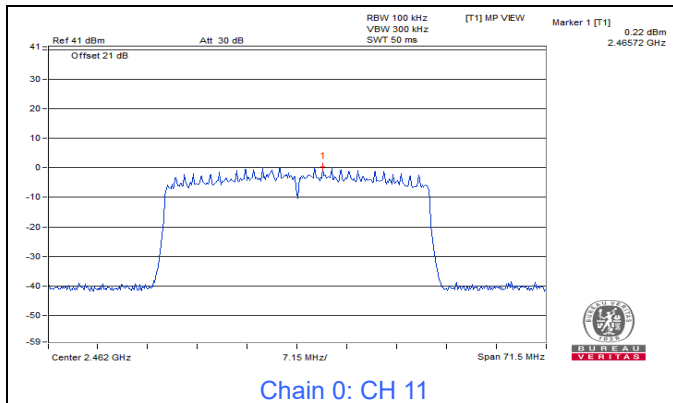

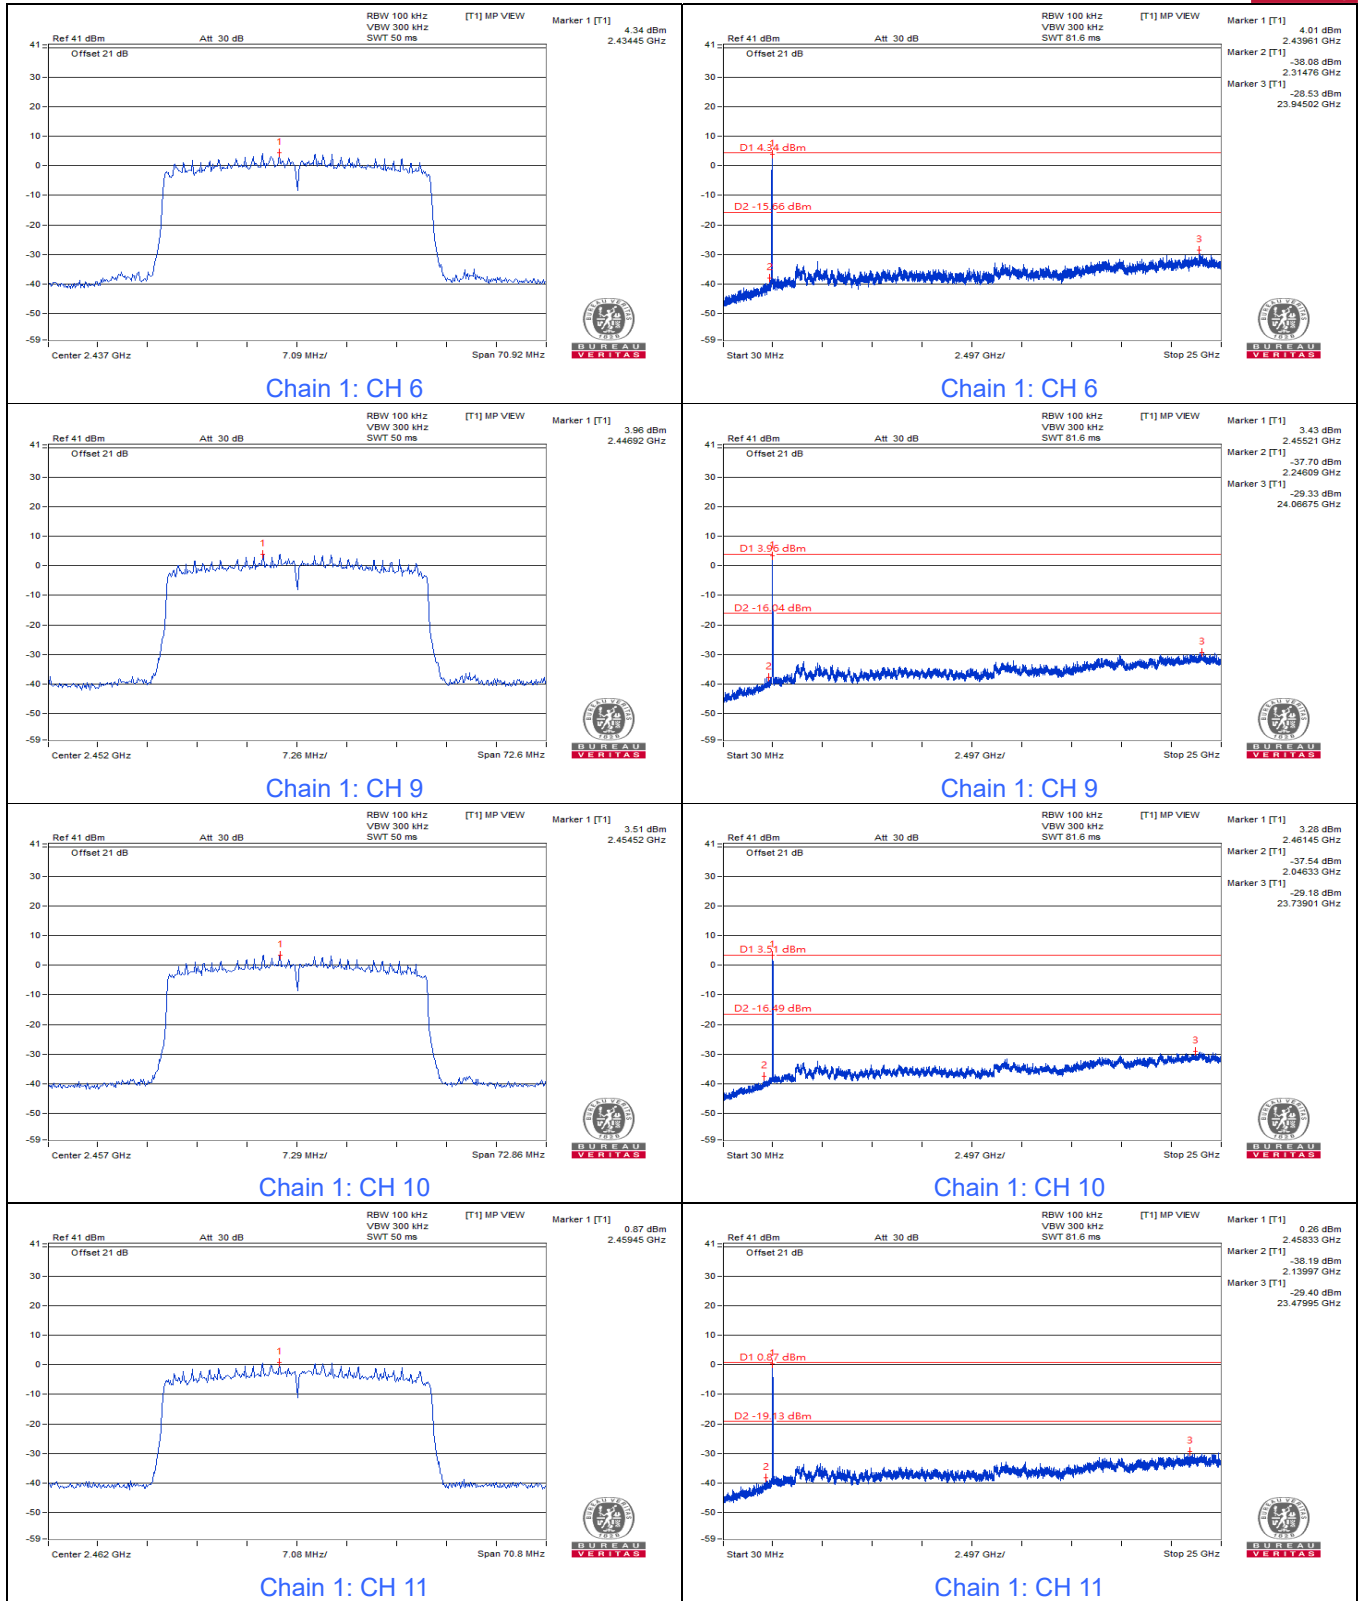


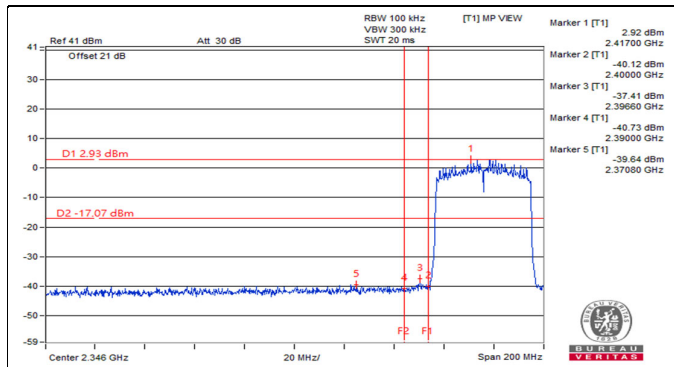


Chain 1: CH 3 Band edge

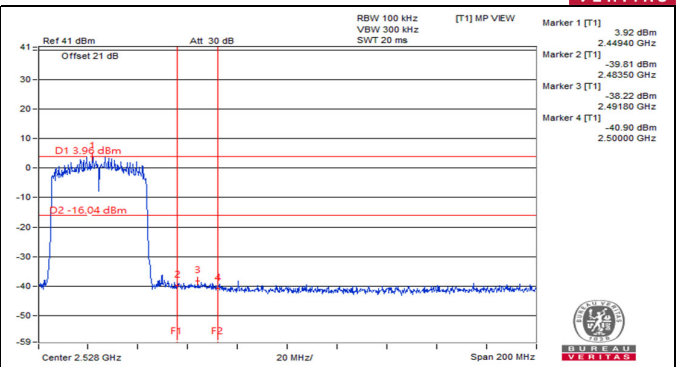

Chain 1: CH 9 Band edge

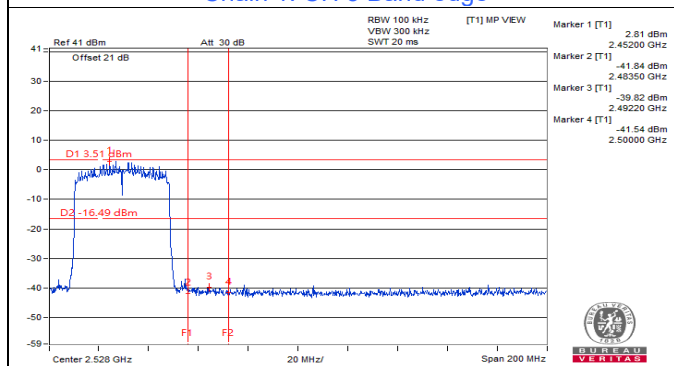










Chain 1: CH 10 Band edge








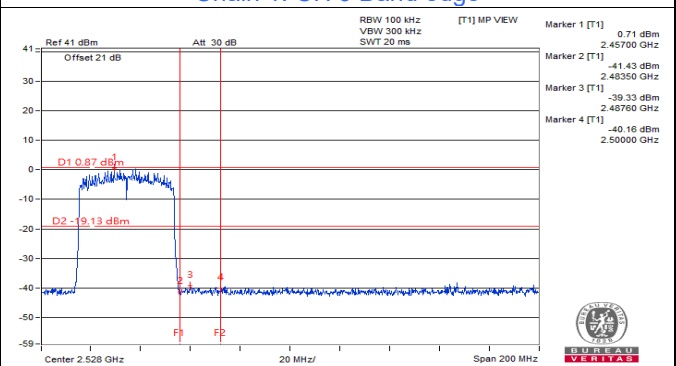










Chain 1: CH 11 Band edge









802.11be (EHT20) 26-tone RU

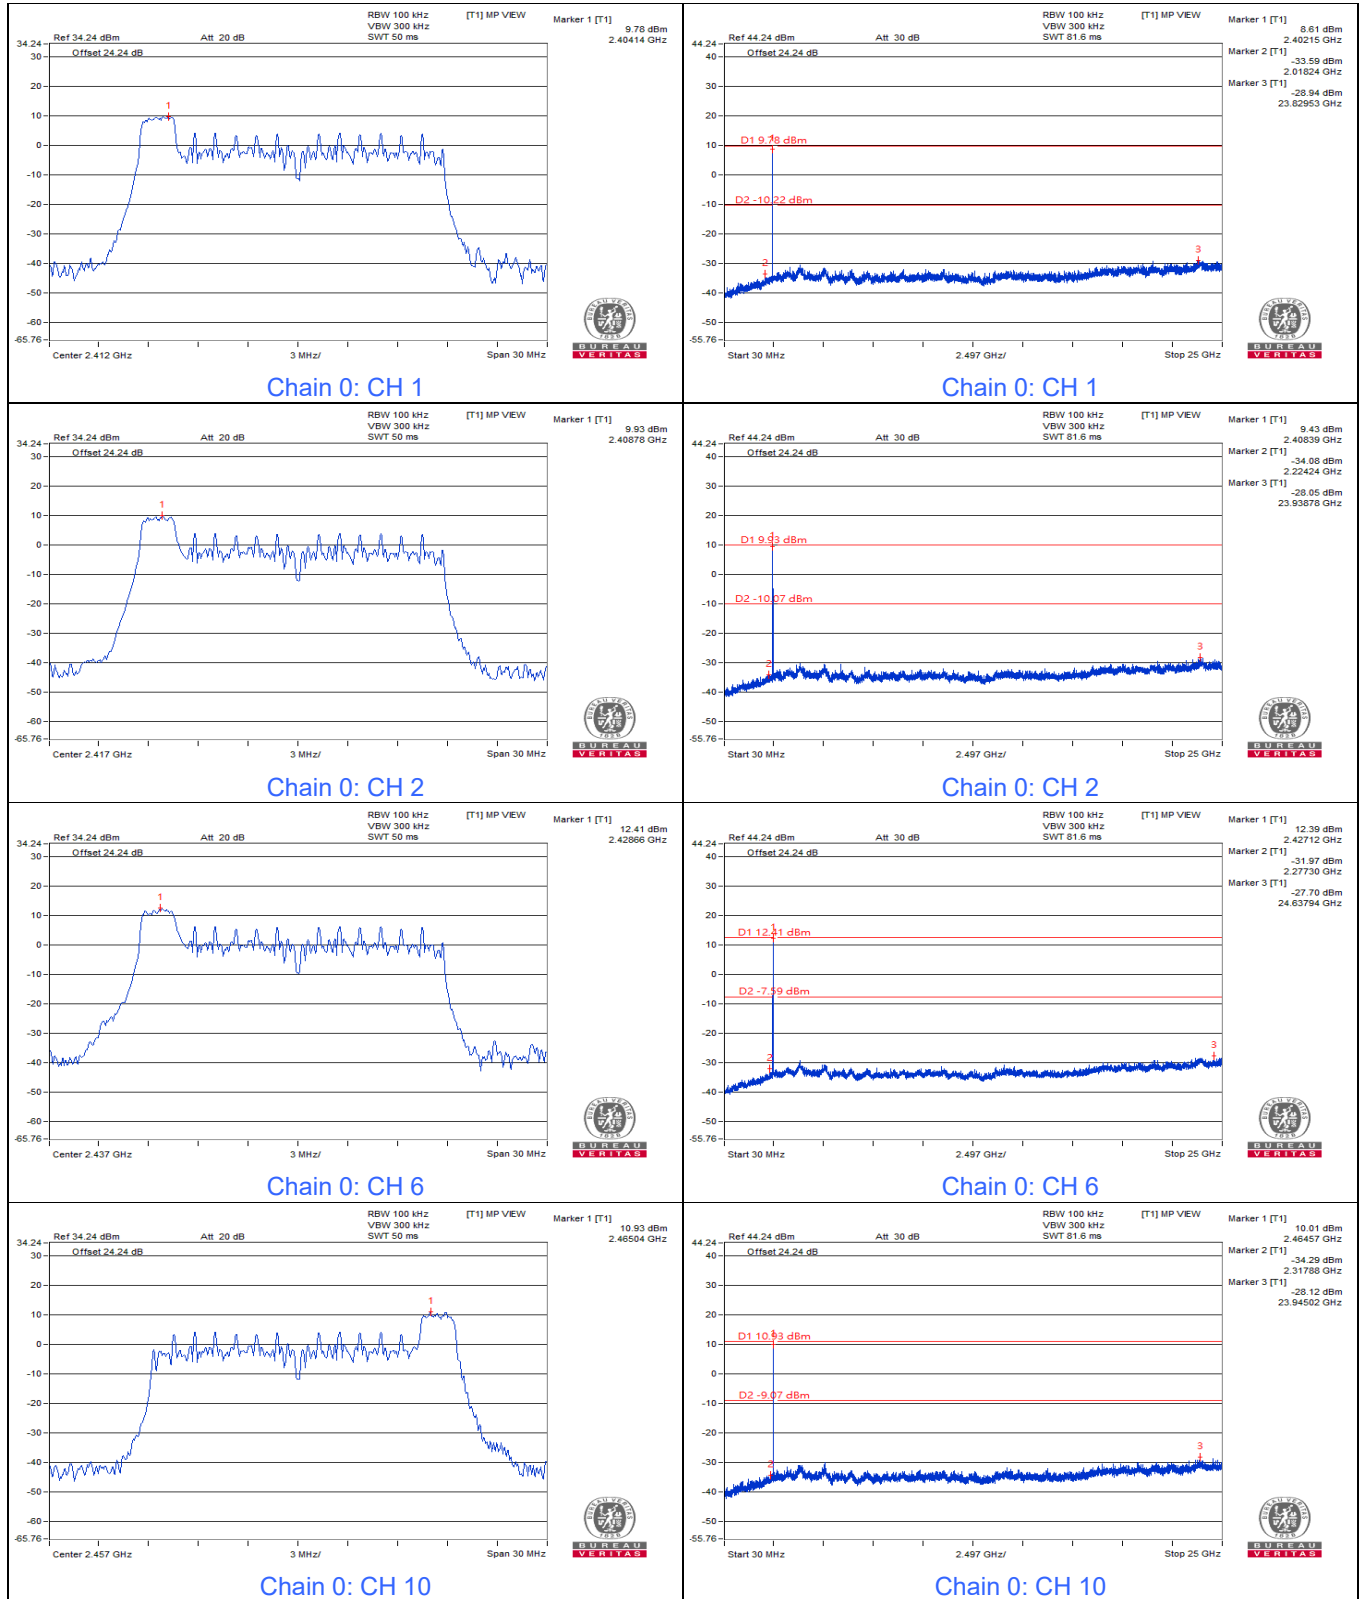

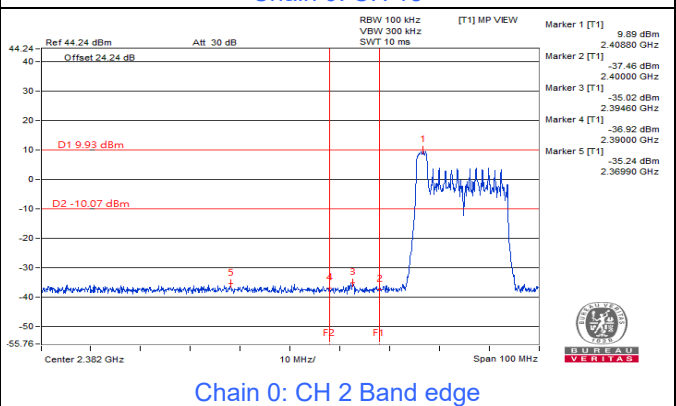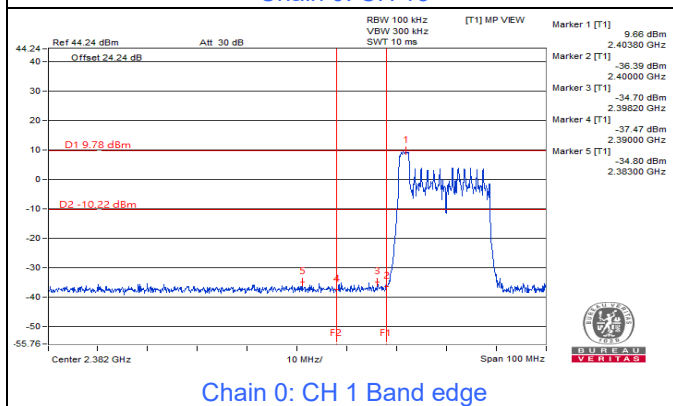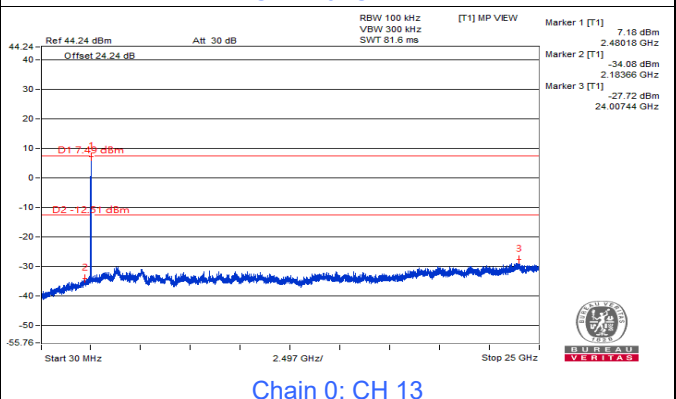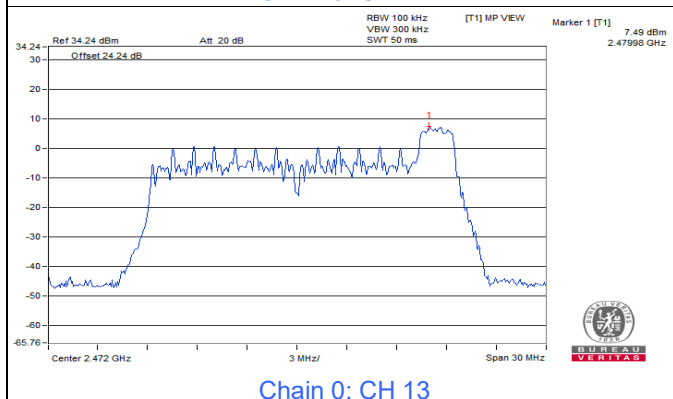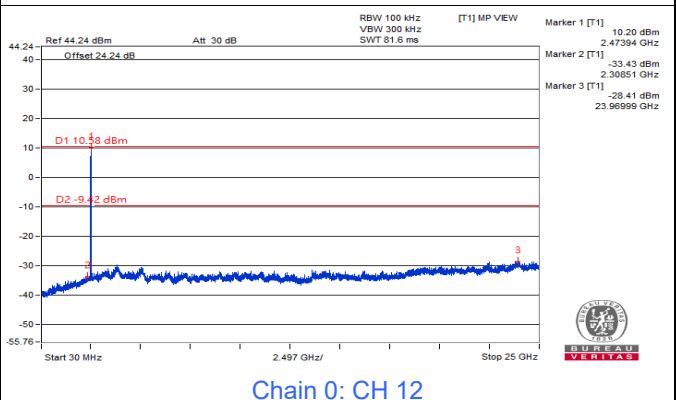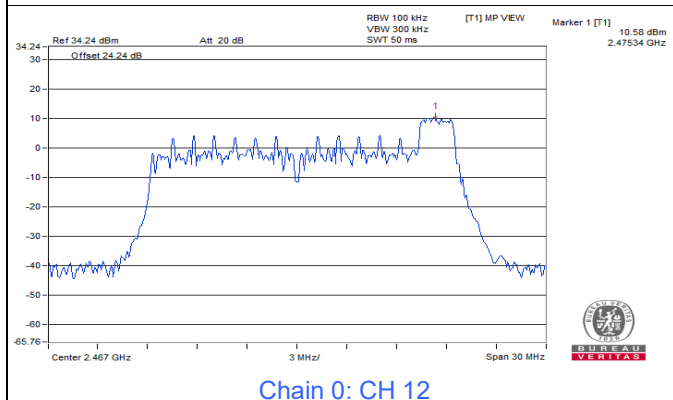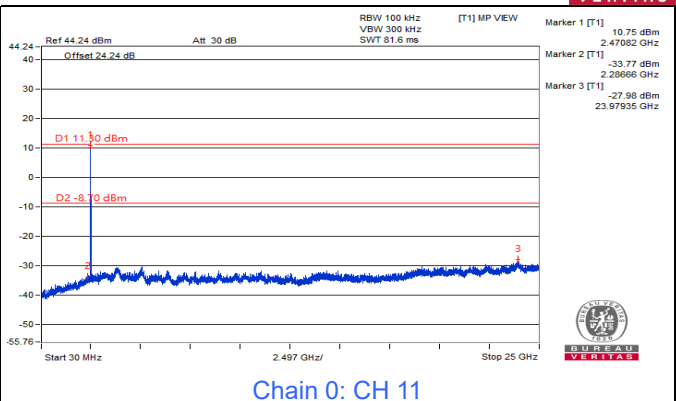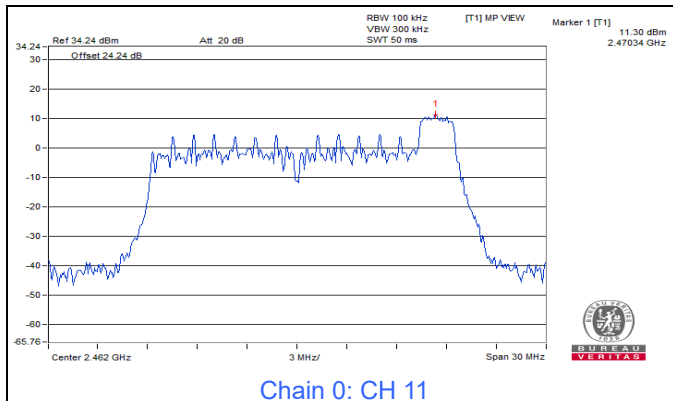


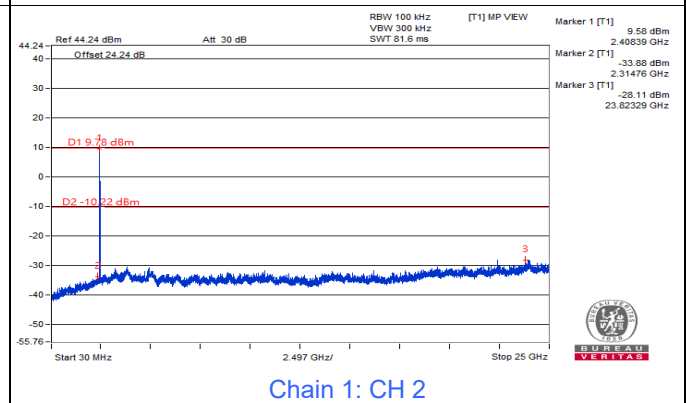
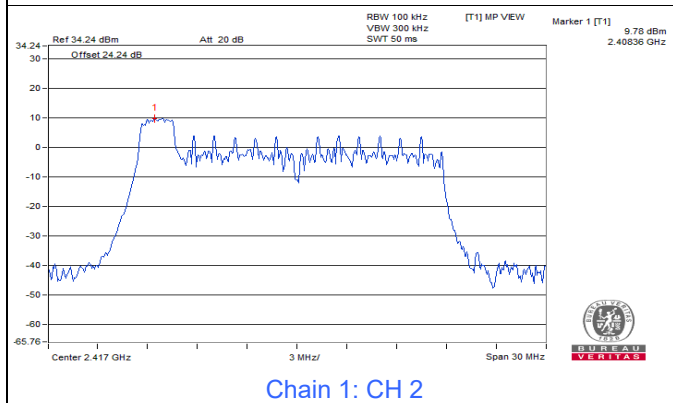
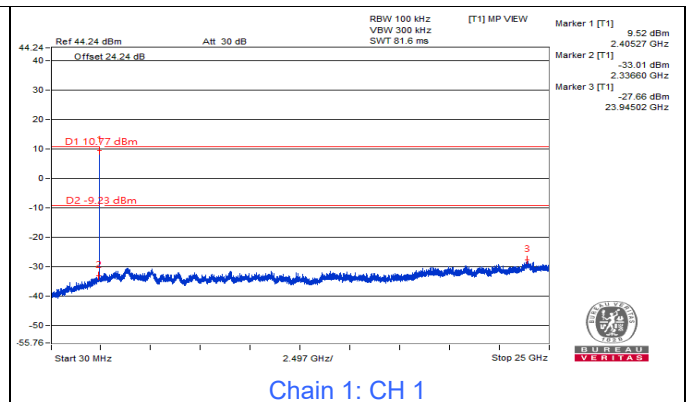
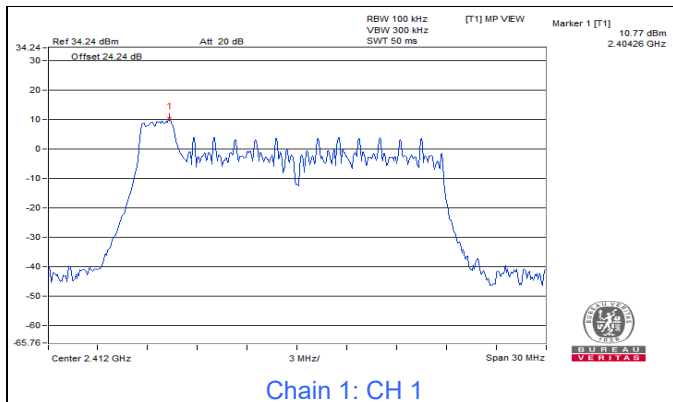
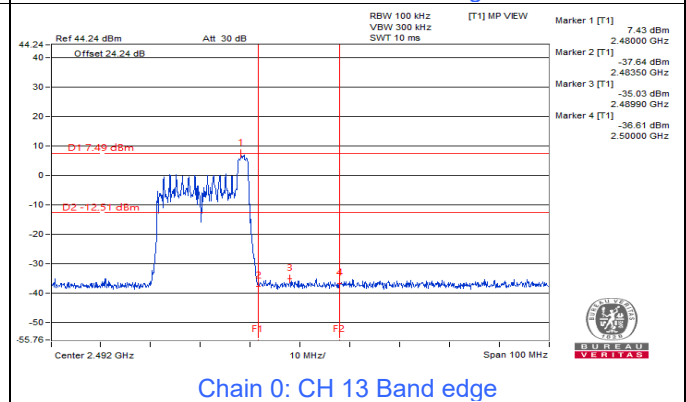
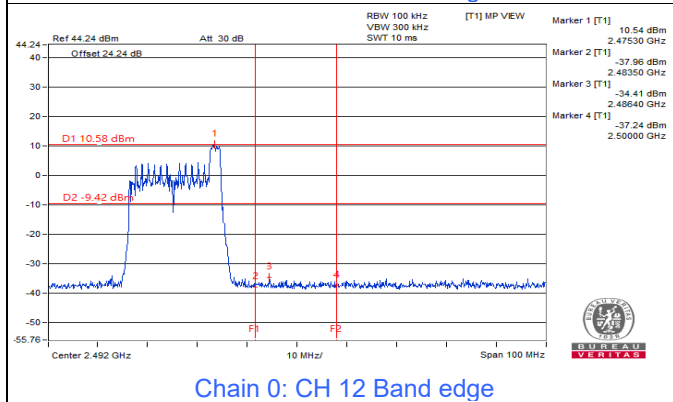
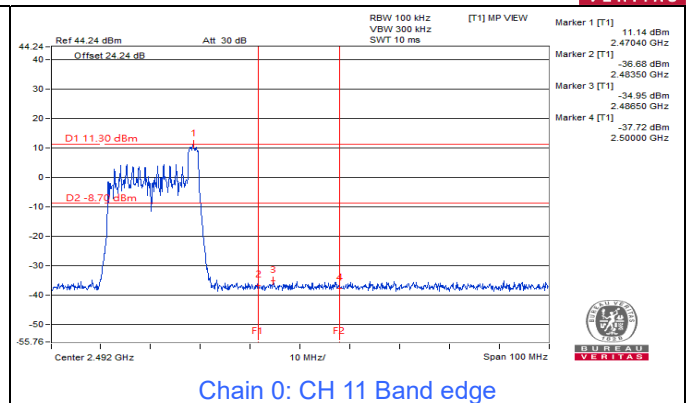
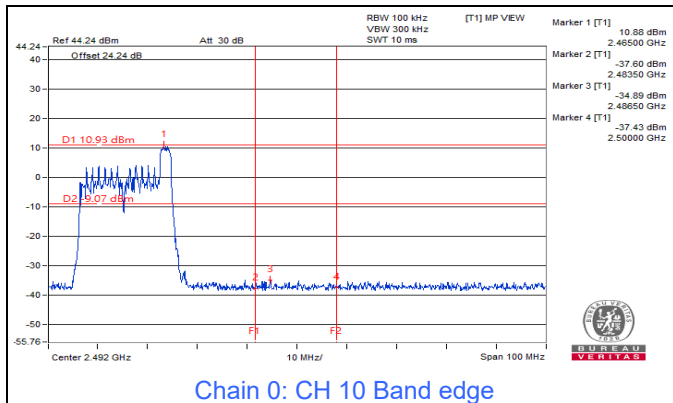


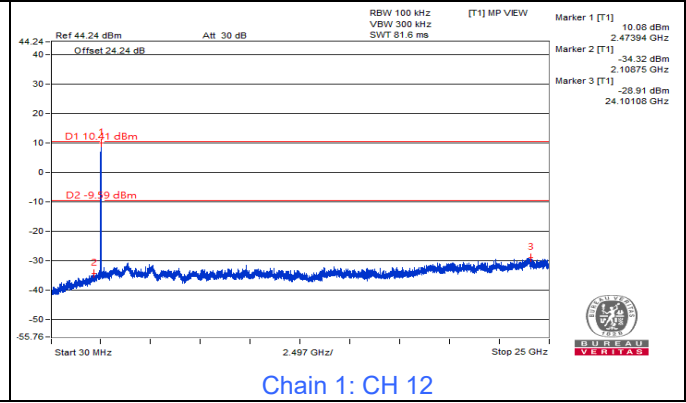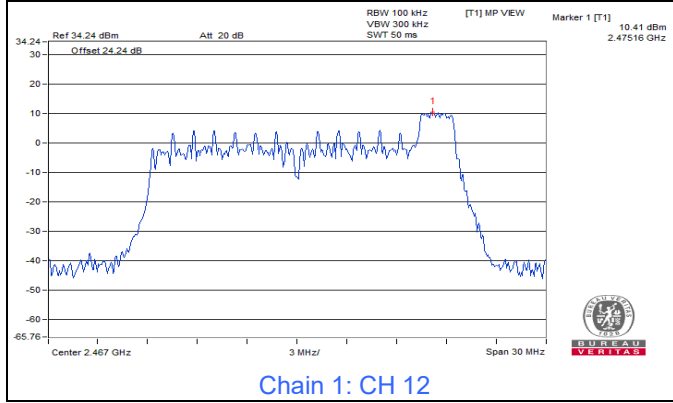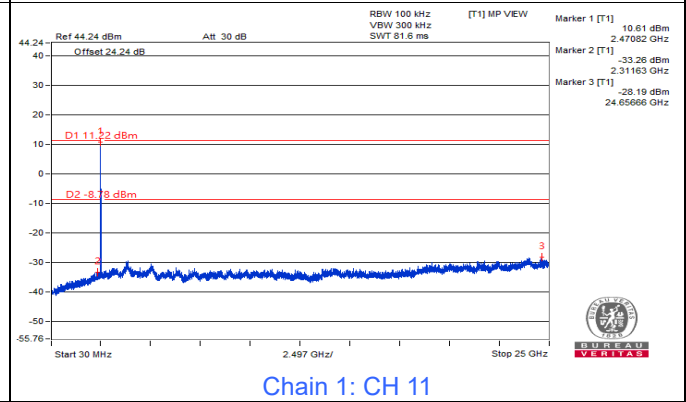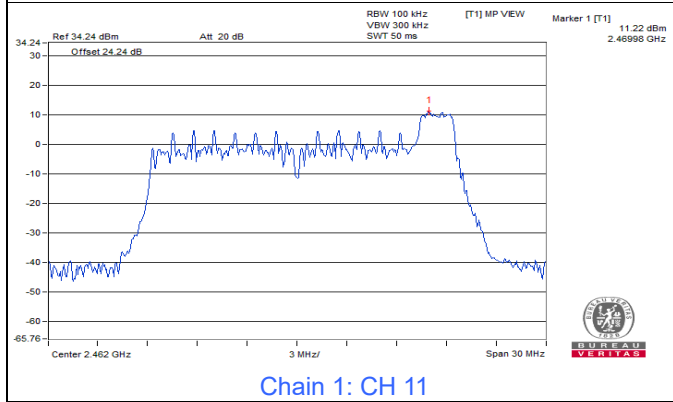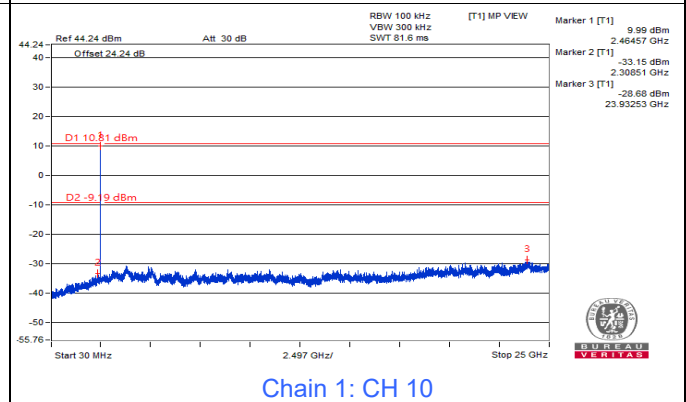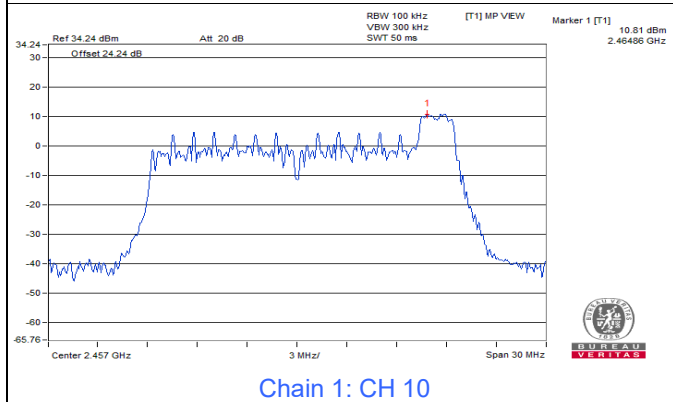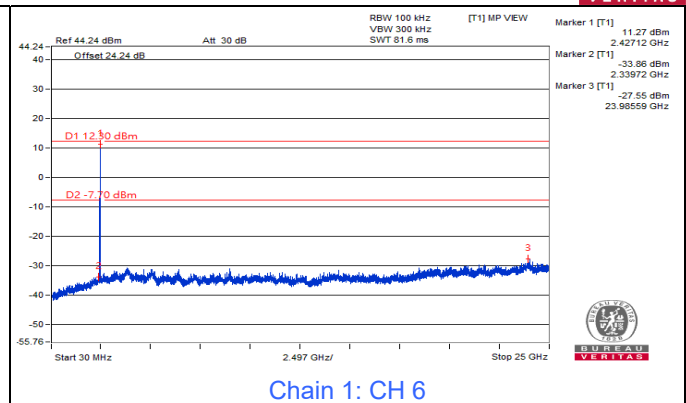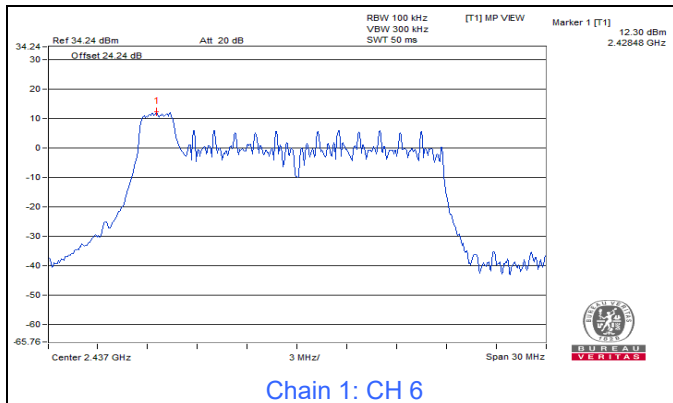


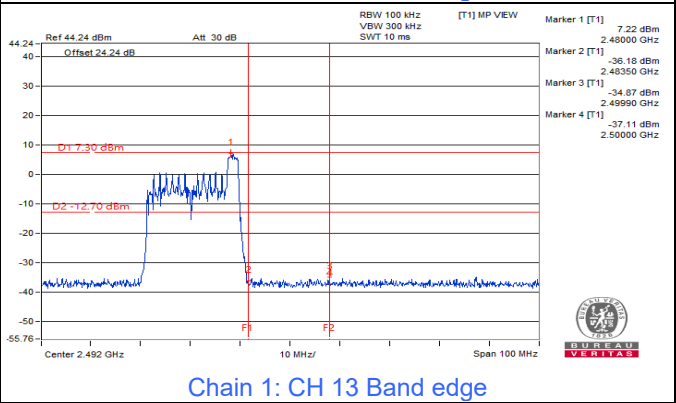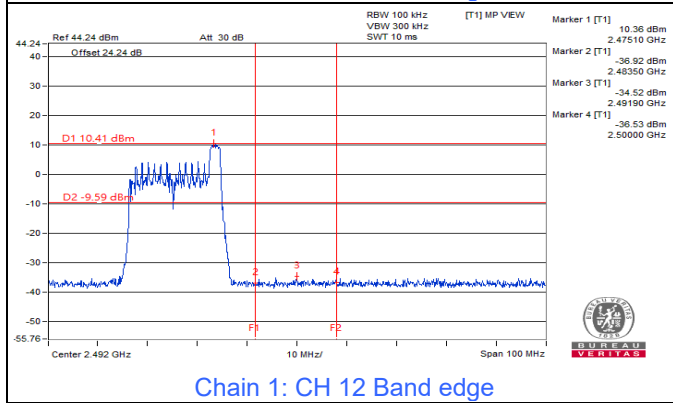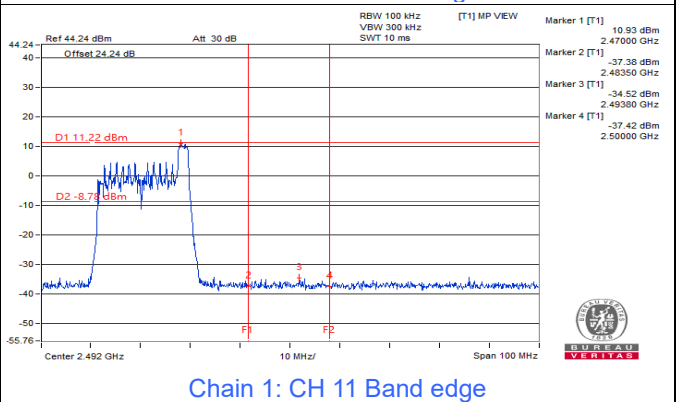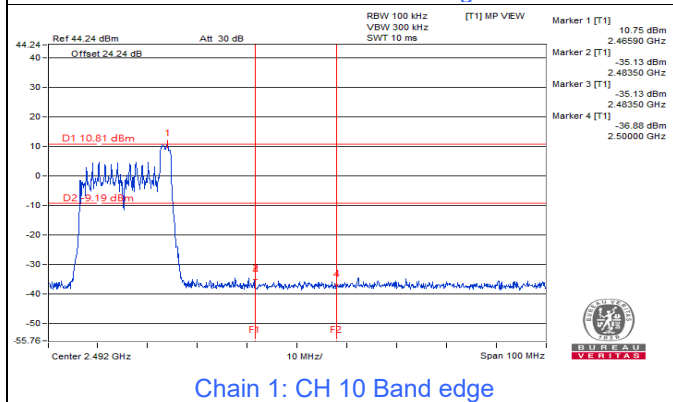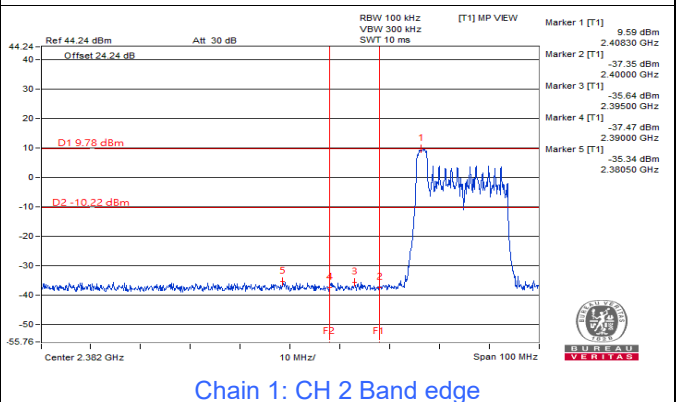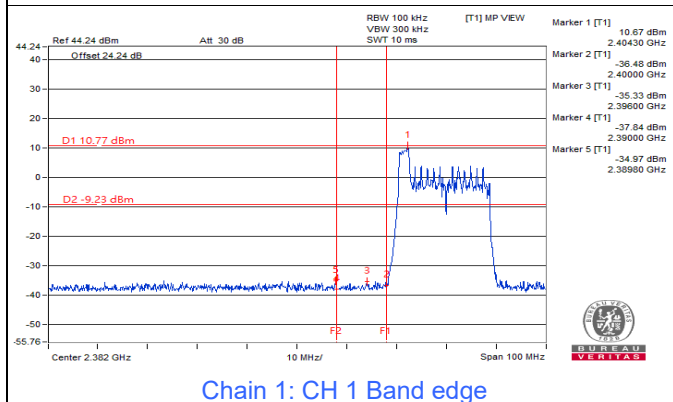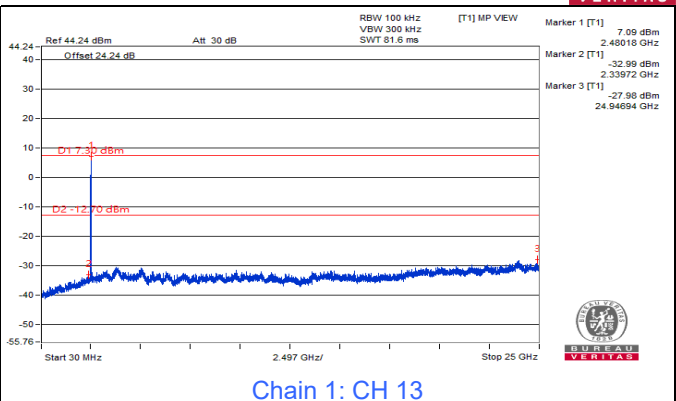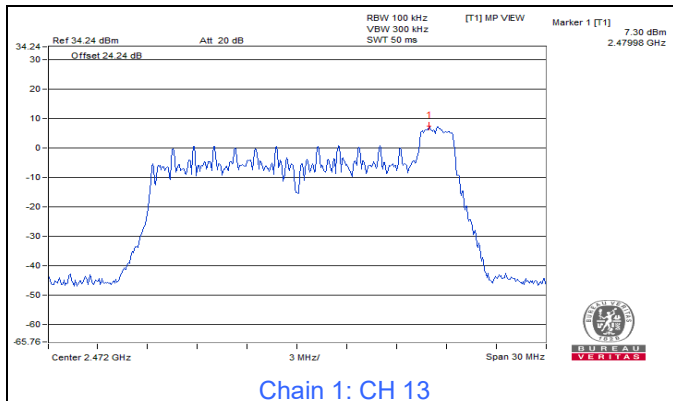


802.11be (EHT20) 52-tone RU

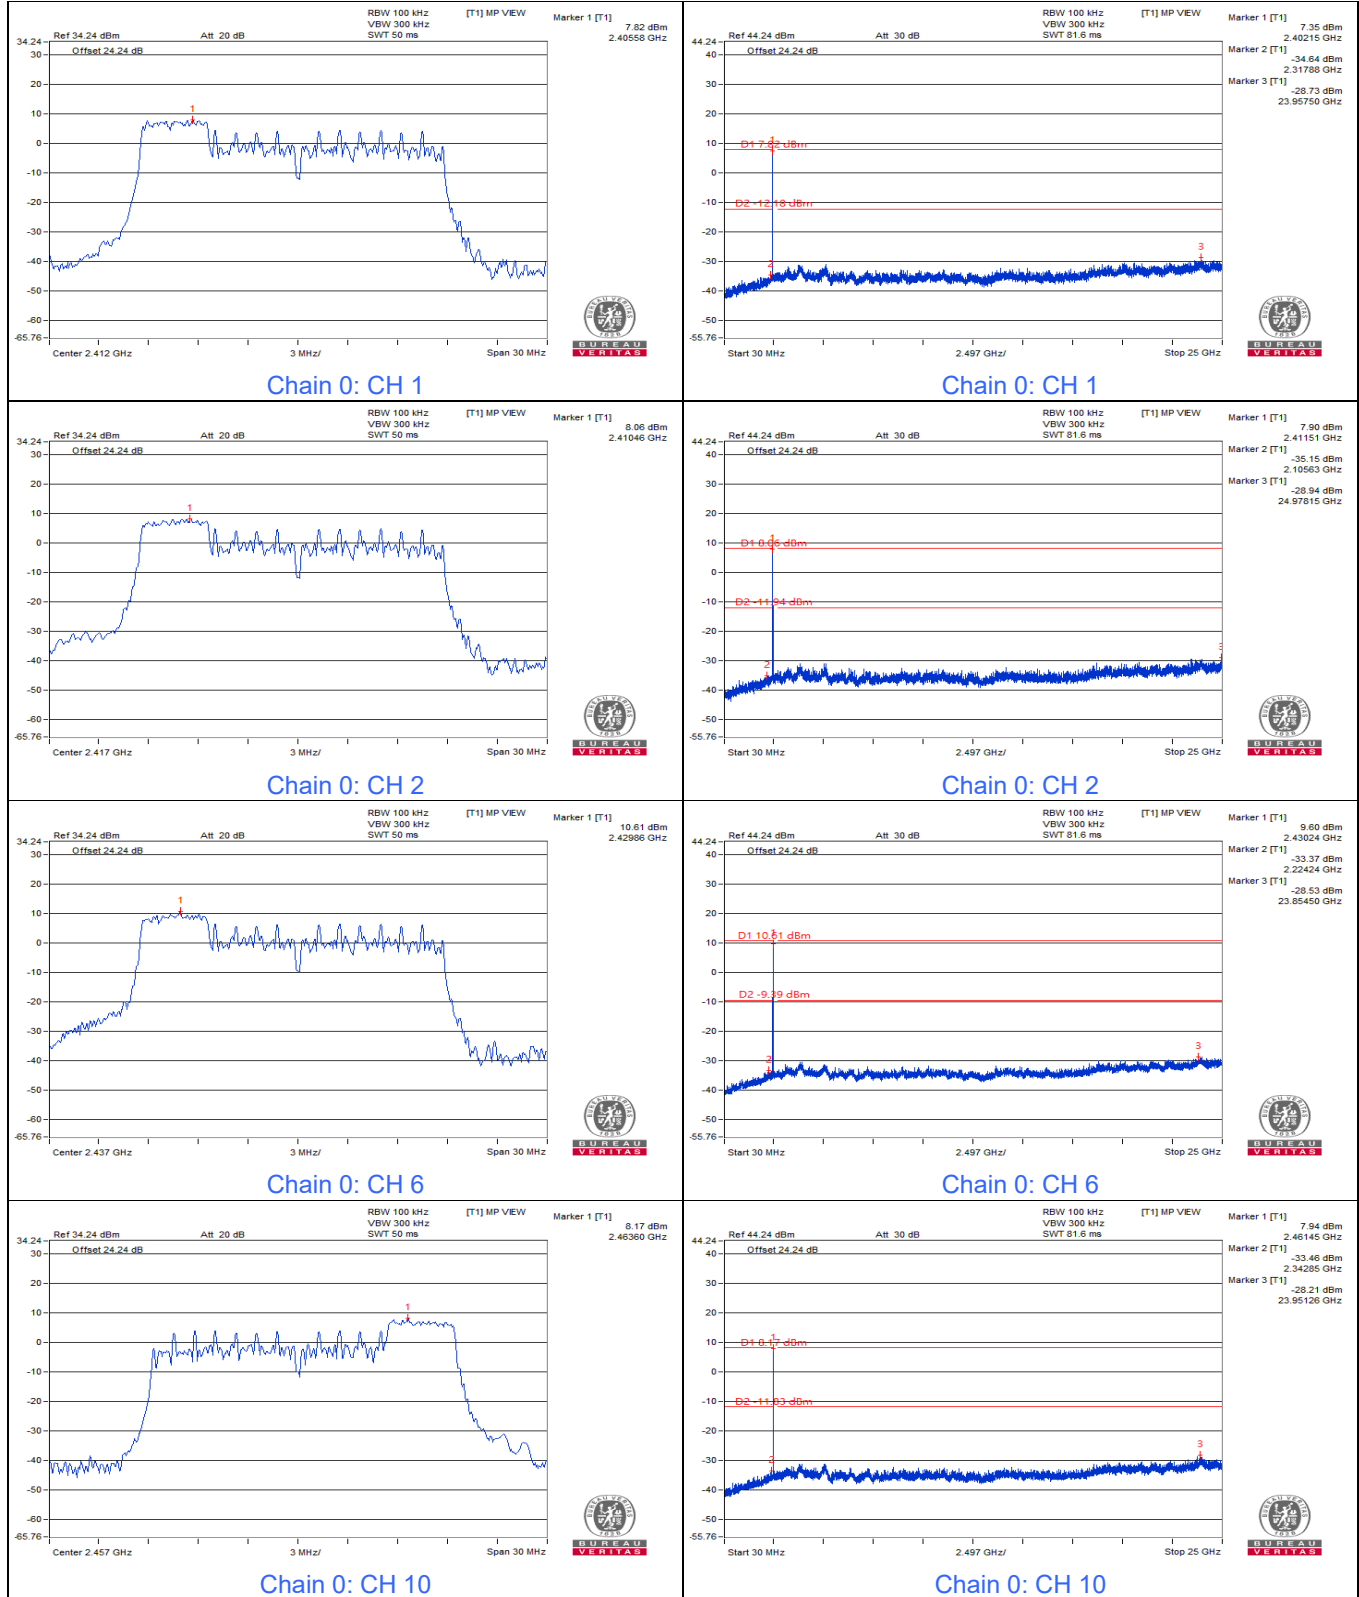

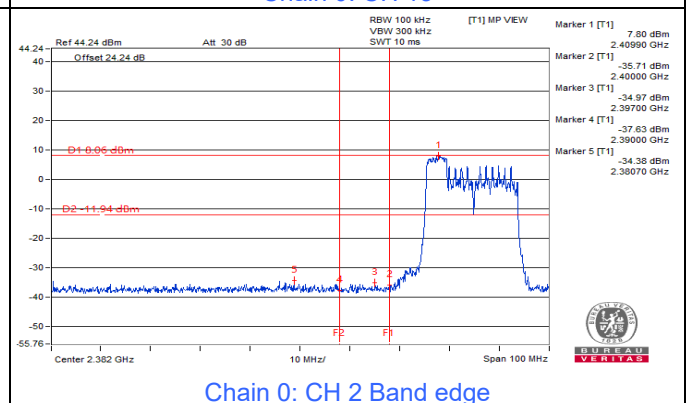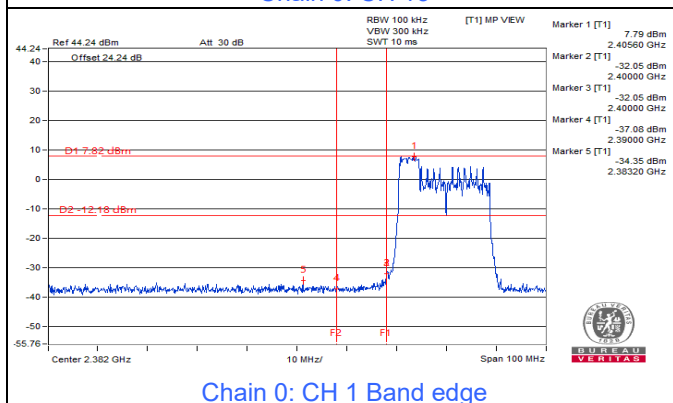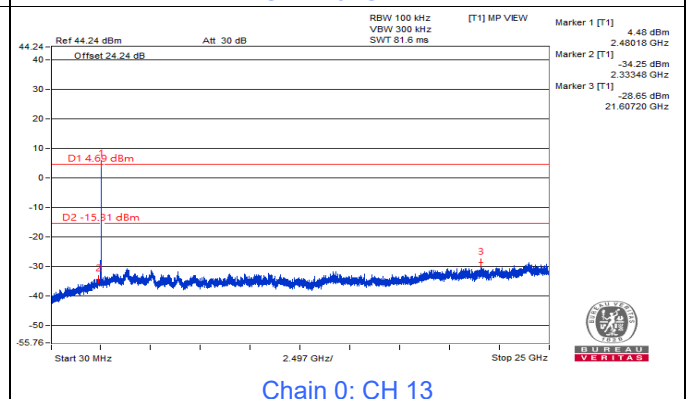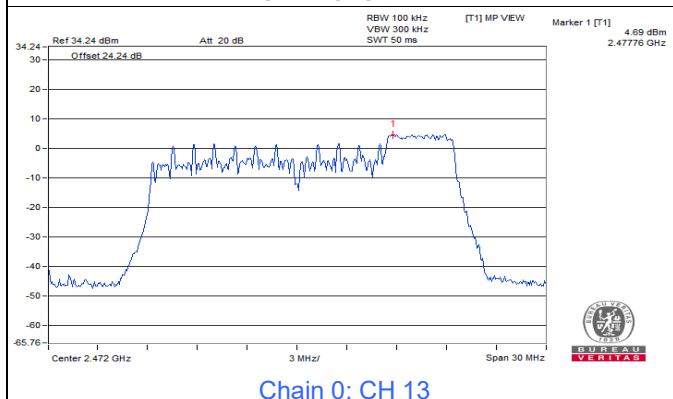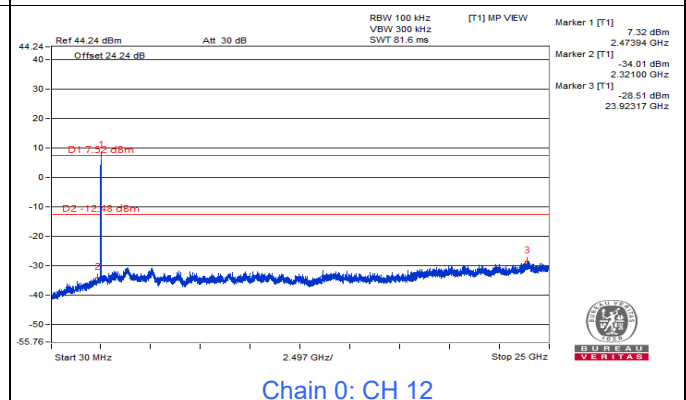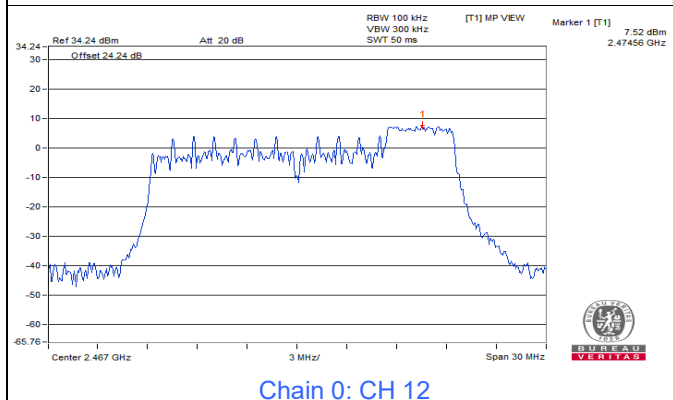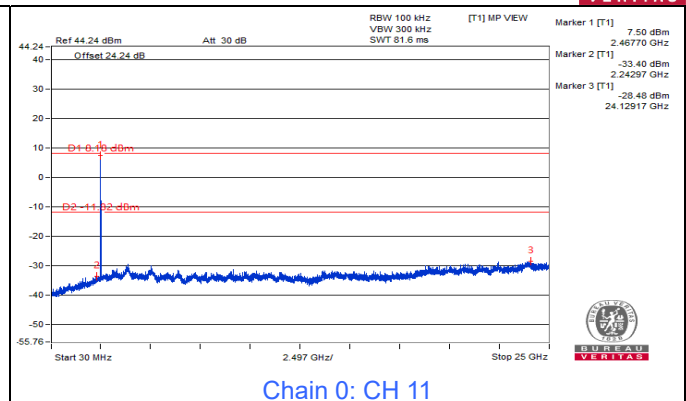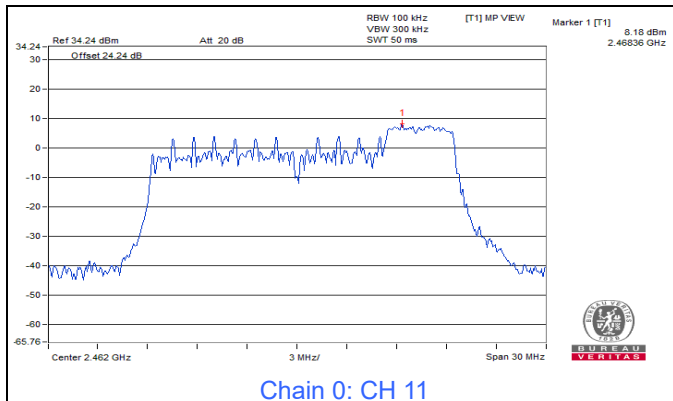


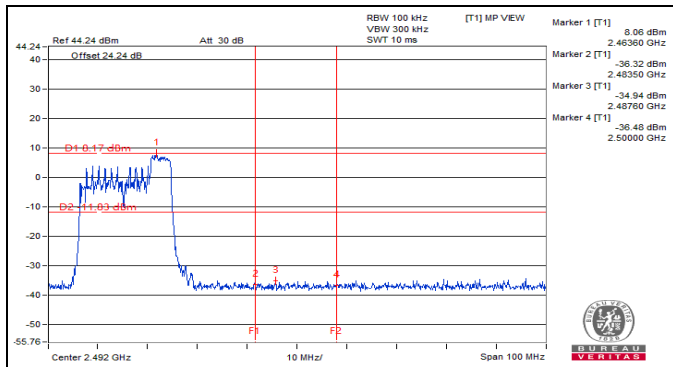


Chain 0: CH 10 Band edge

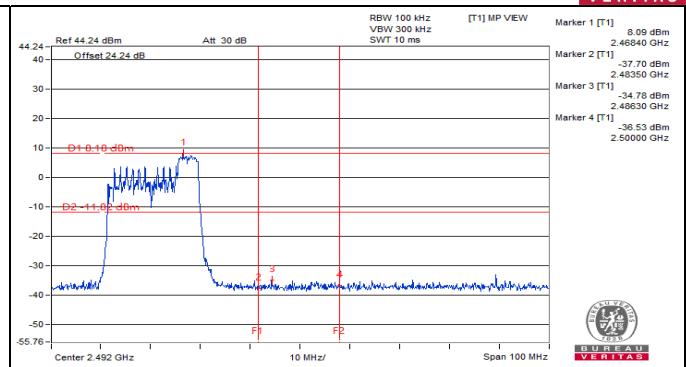


Chain 0: CH 11 Band edge

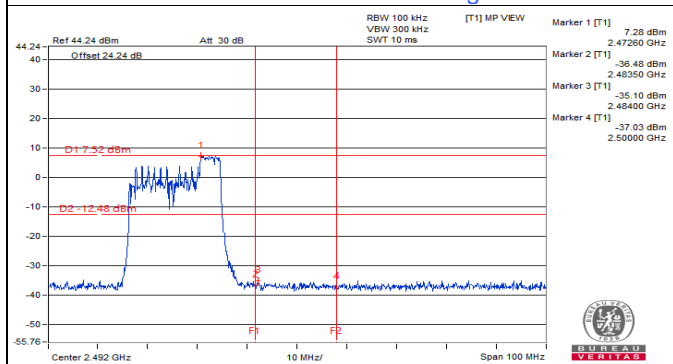


Chain 0: CH 12 Band edge

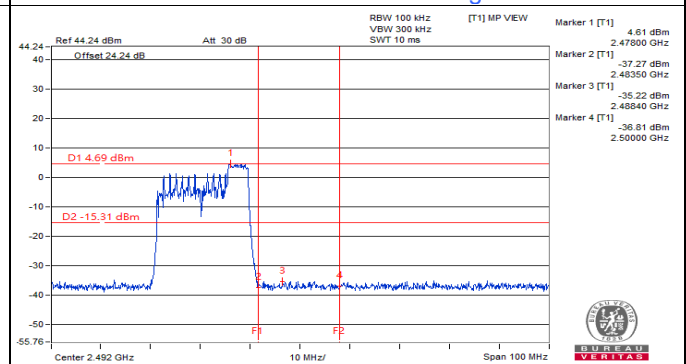


Chain 0: CH 13 Band edge

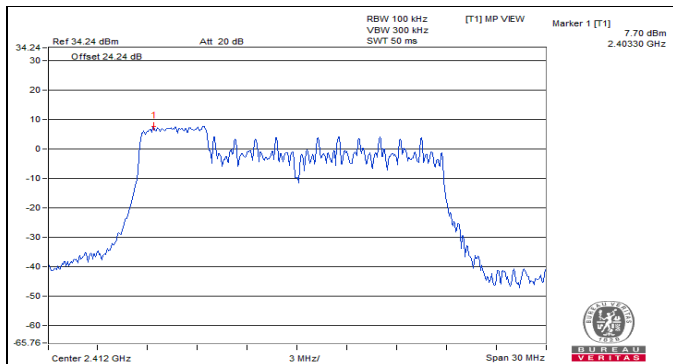


Chain 1: CH 1

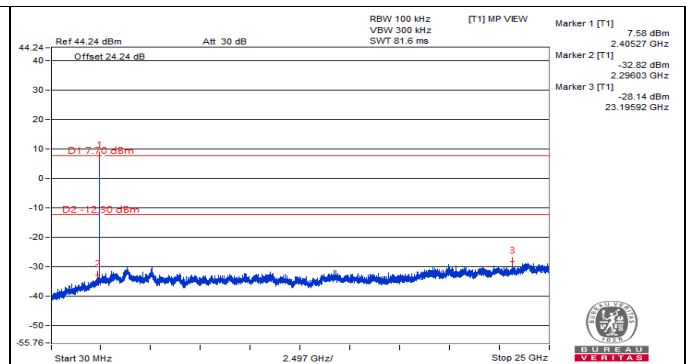

Chain 1: CH 1

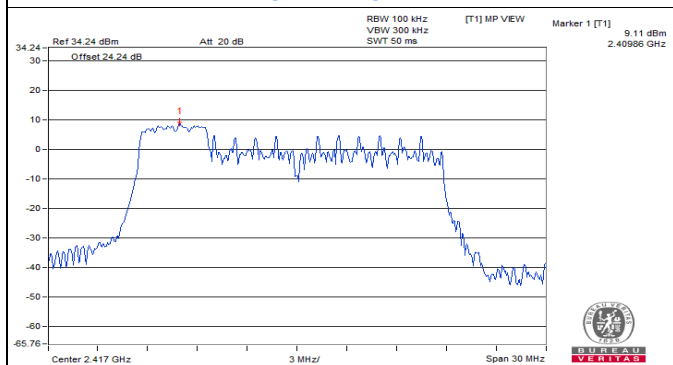









Chain 1: CH 2








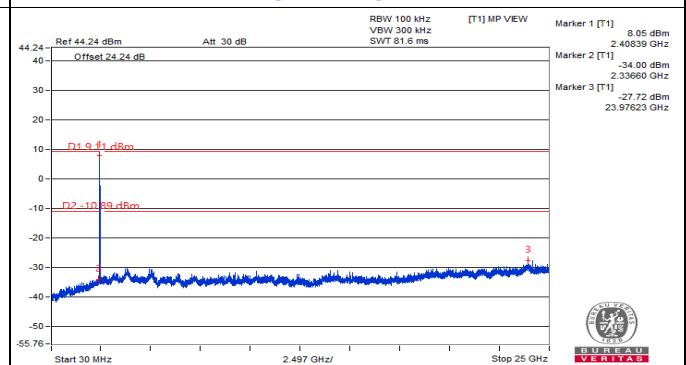


Chain 1: CH 2












BUREAU
VERITAS

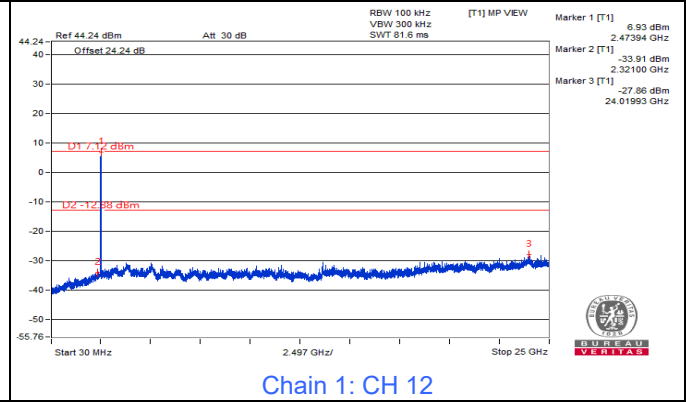
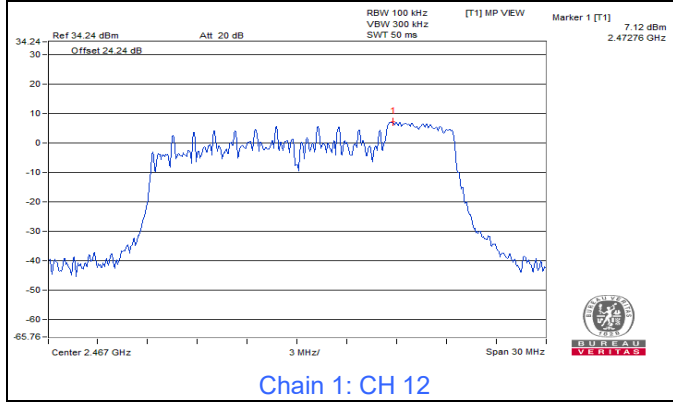
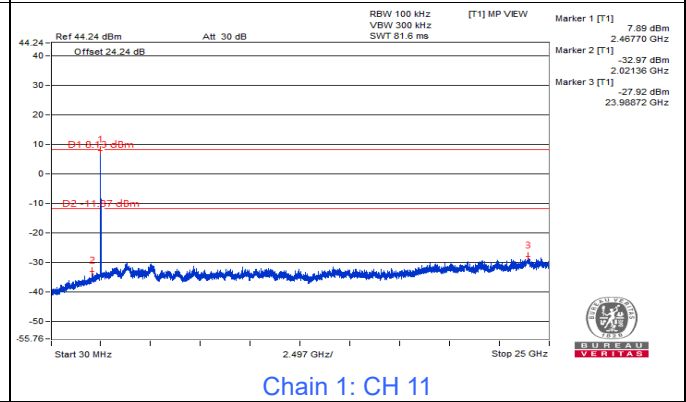
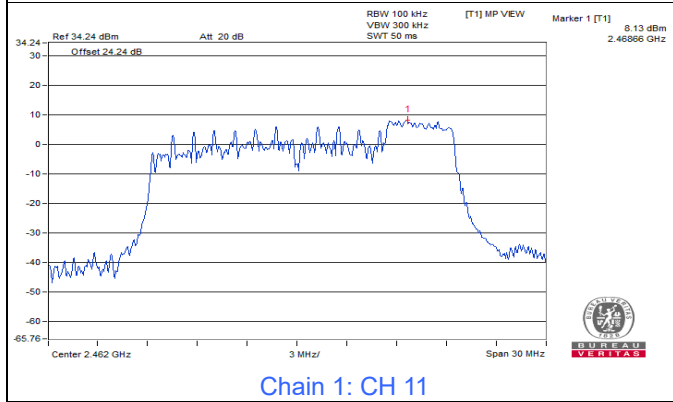
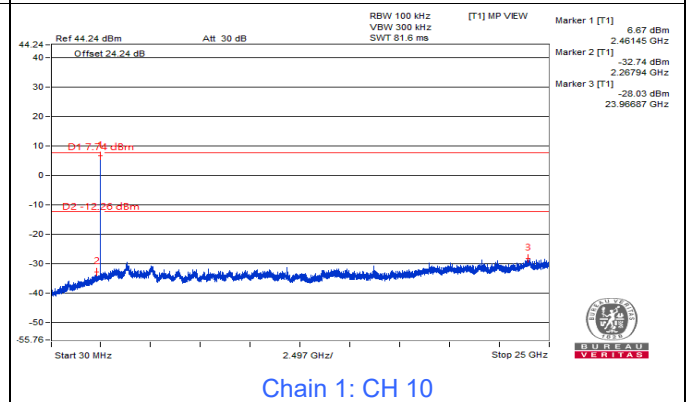
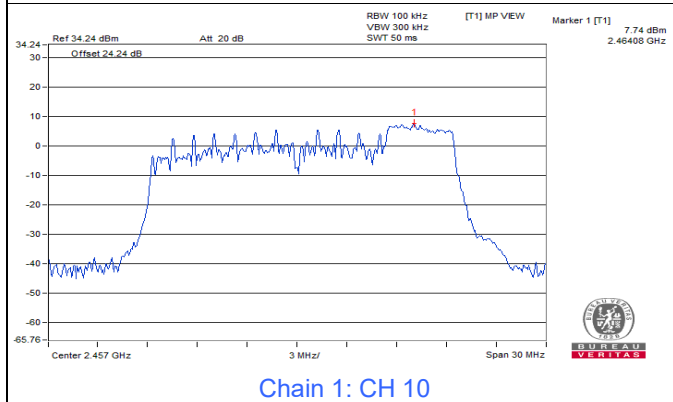
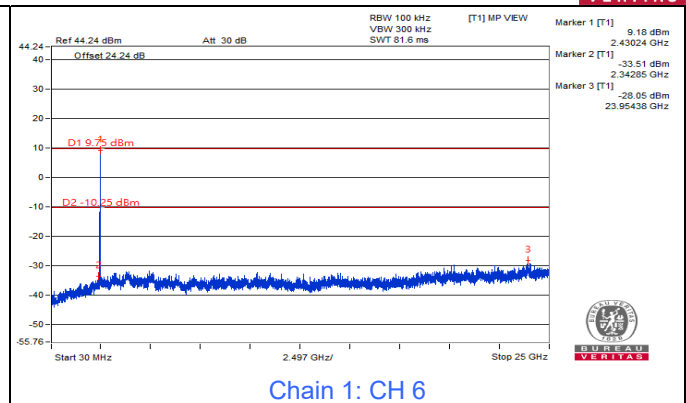
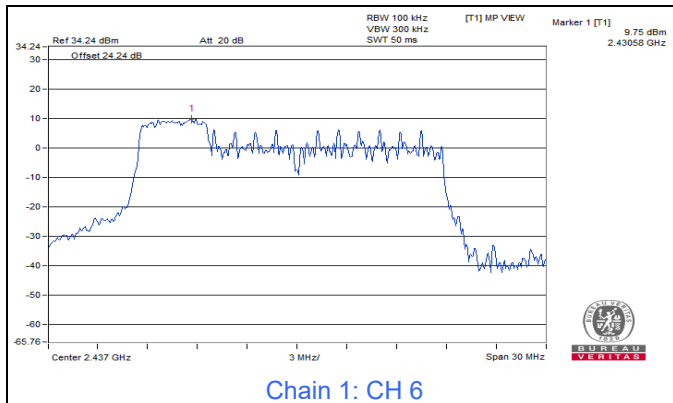


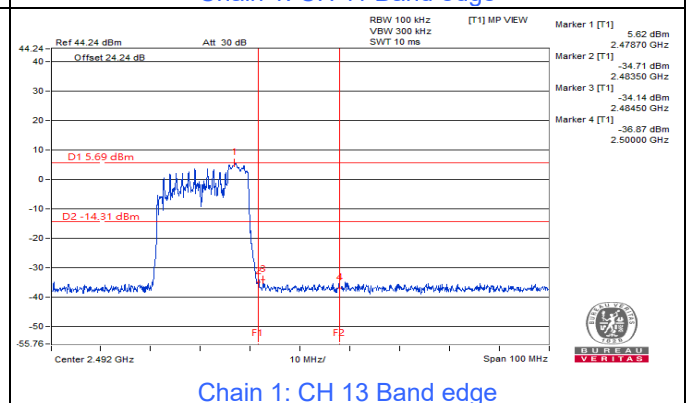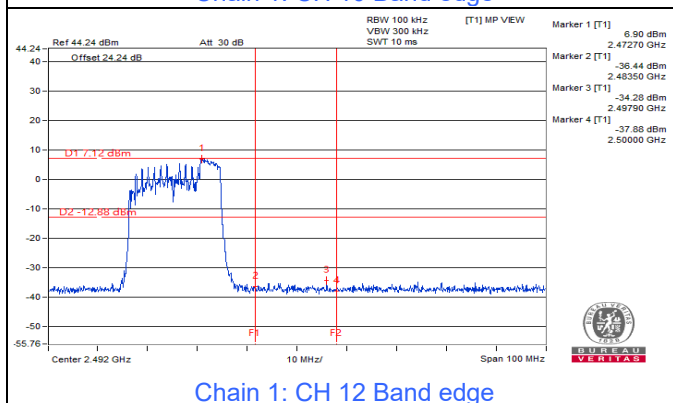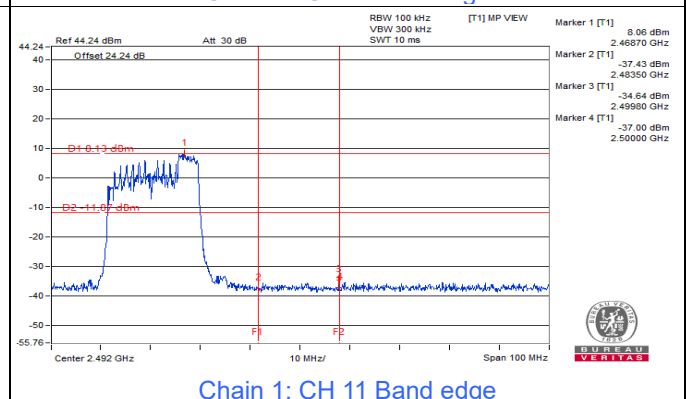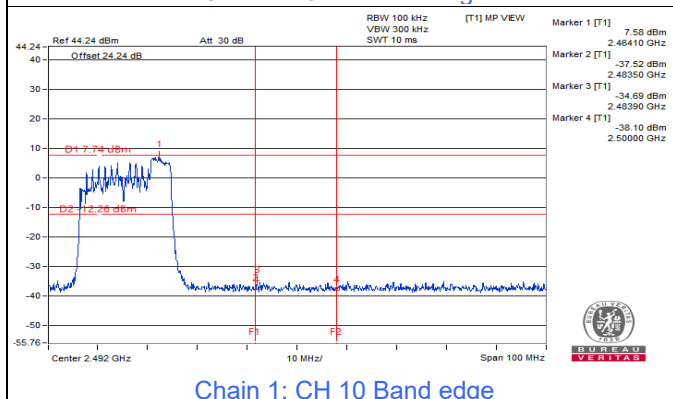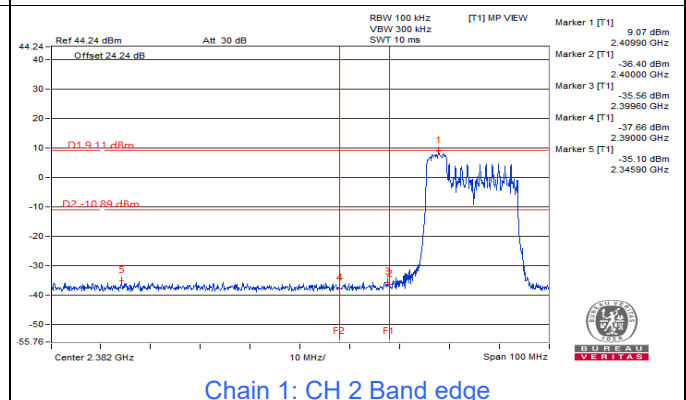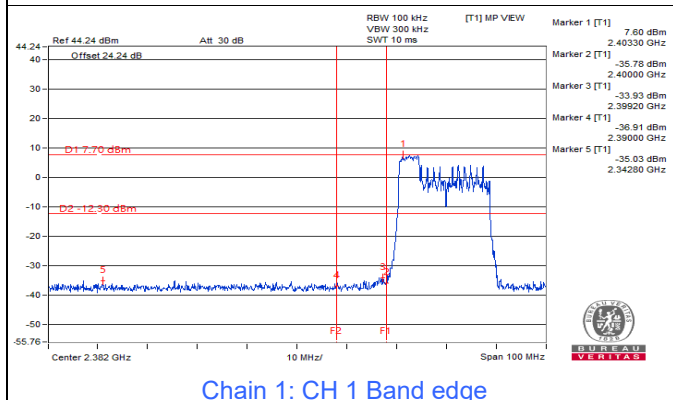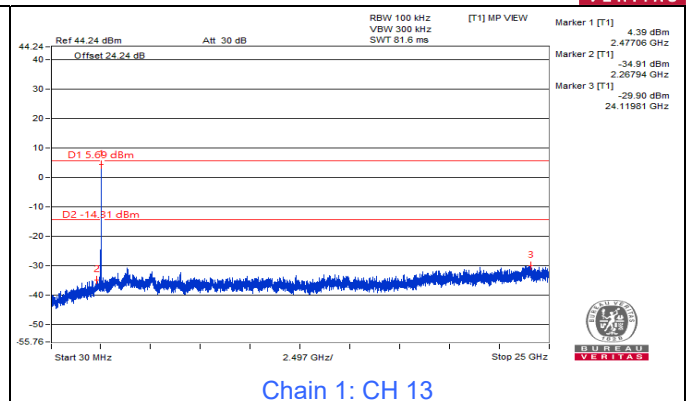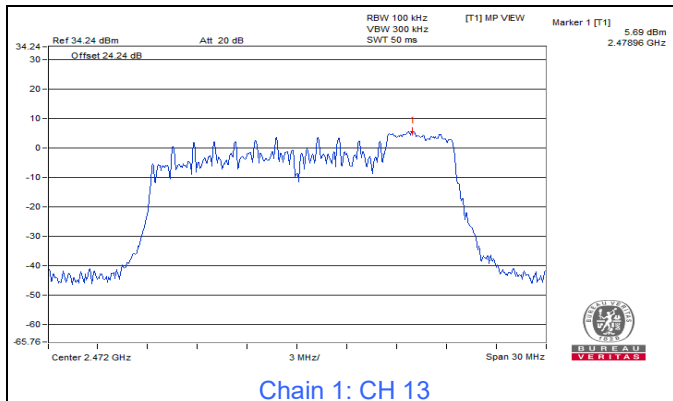

802.11be (EHT20) 106-tone RU








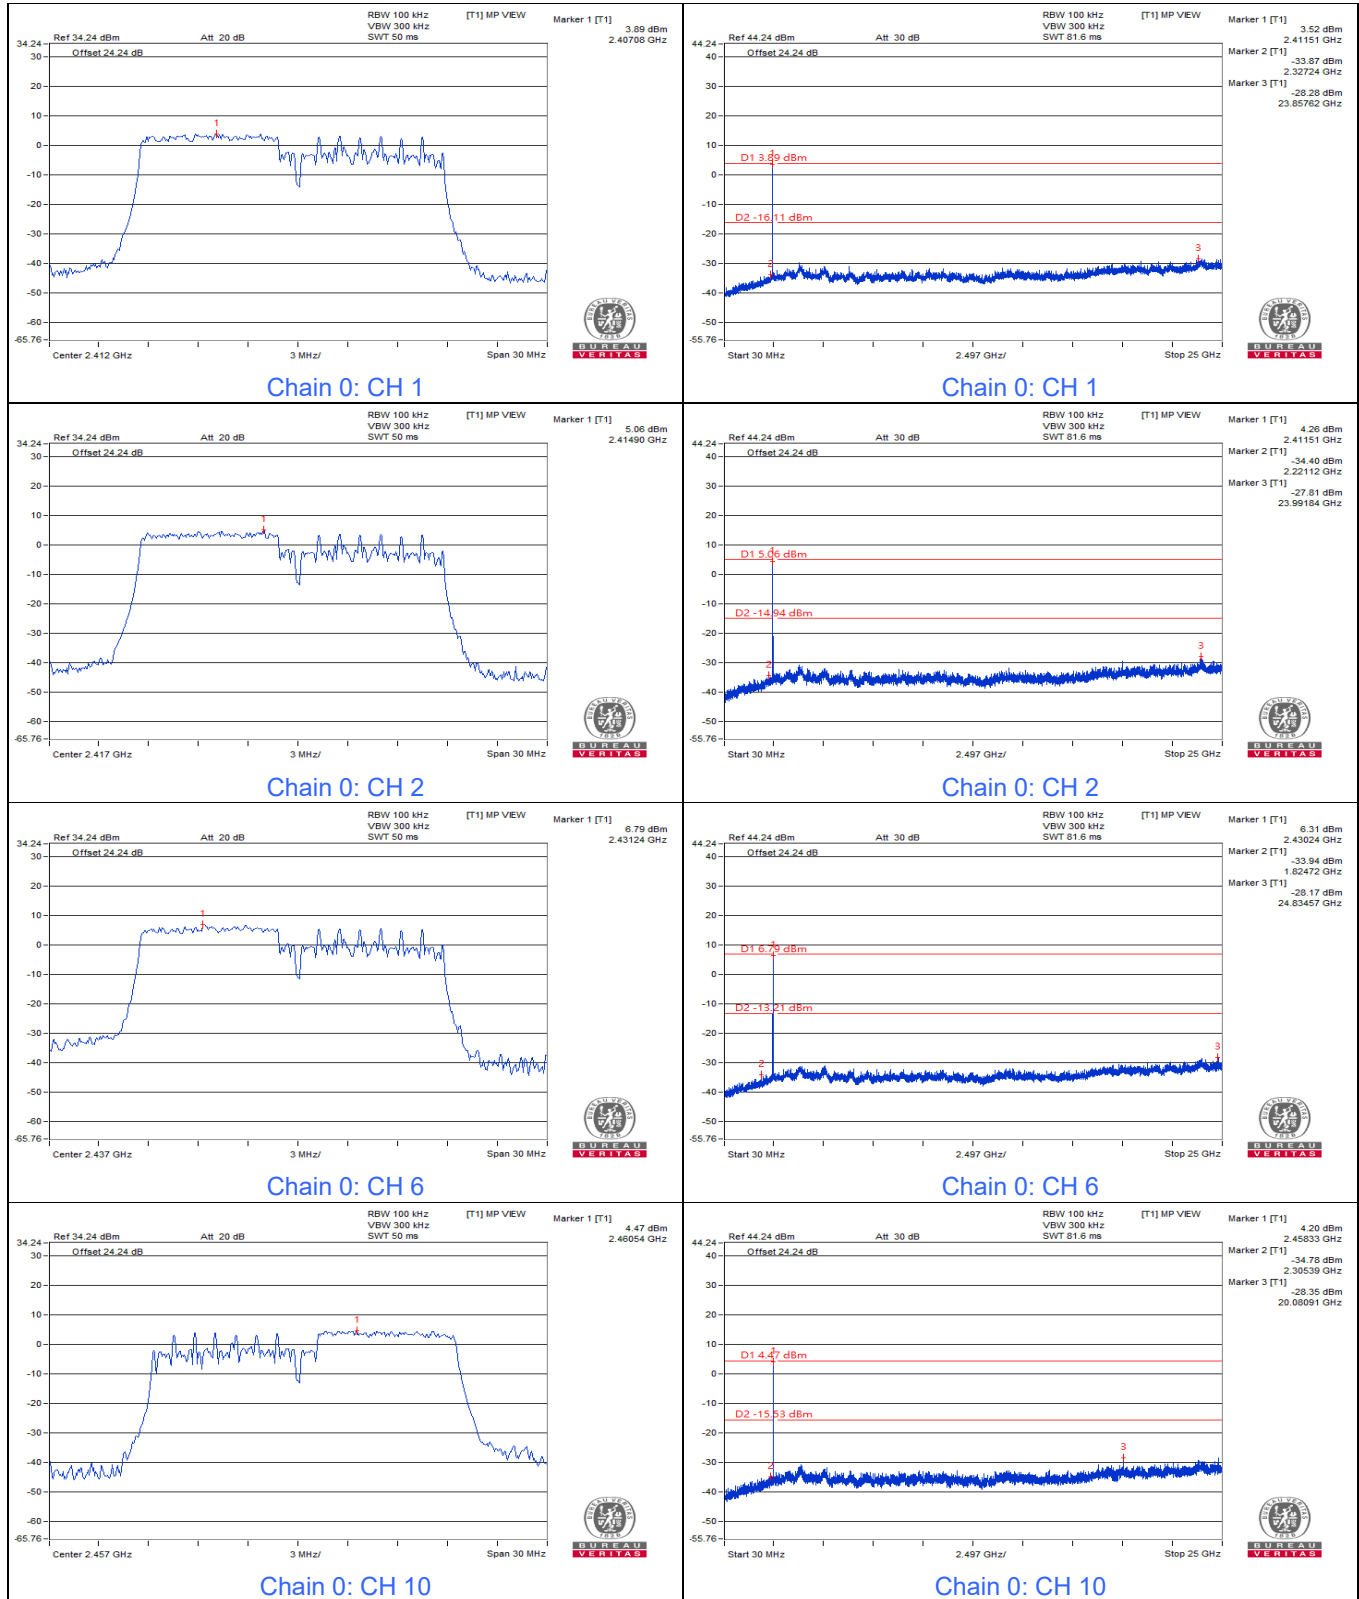


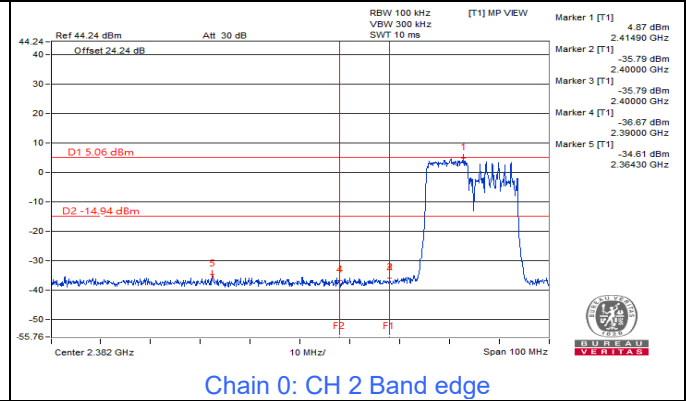
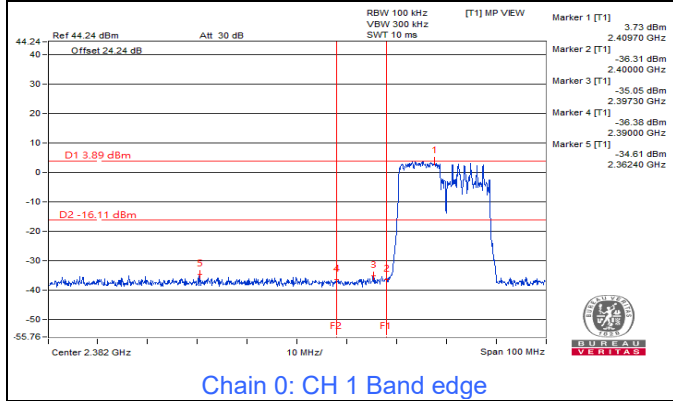
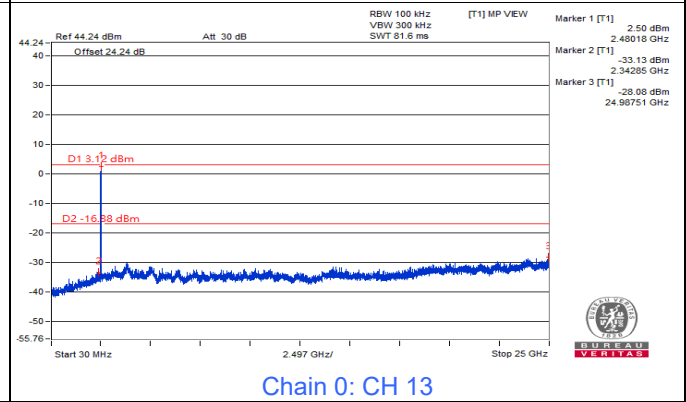
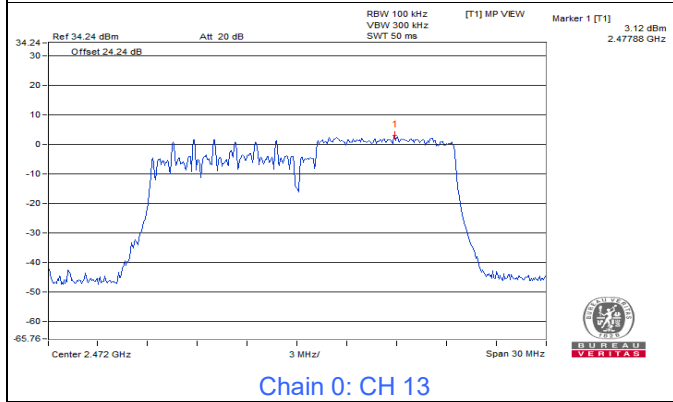
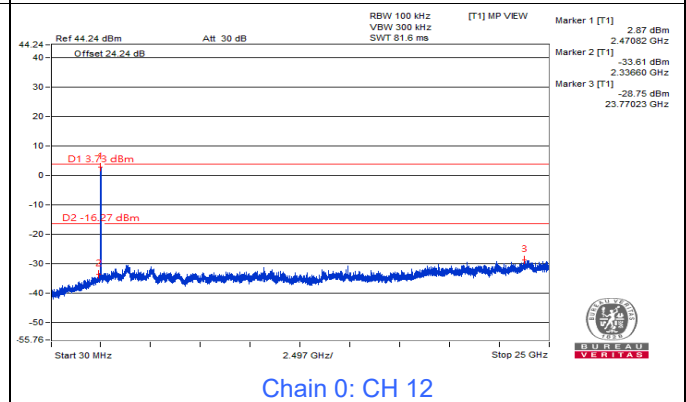
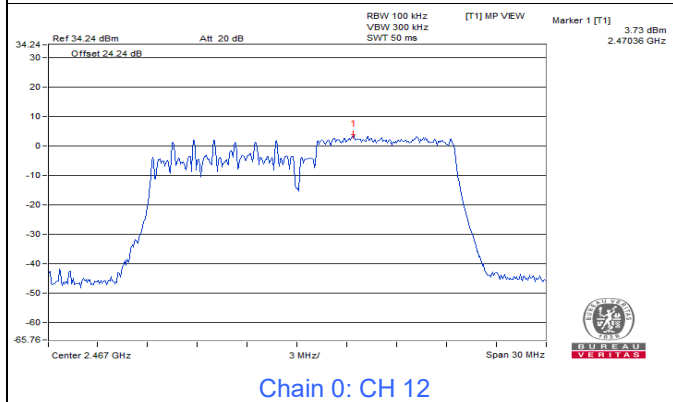
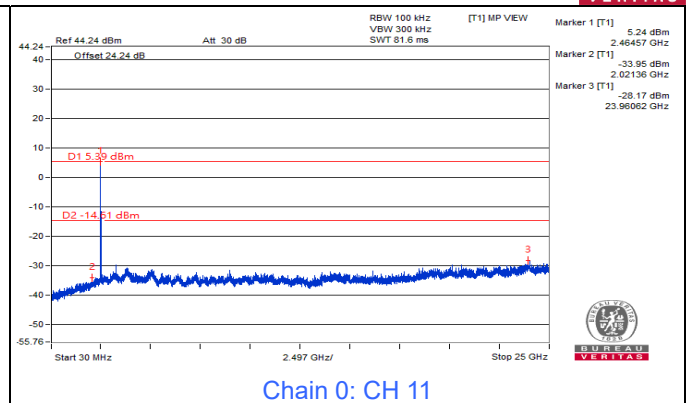
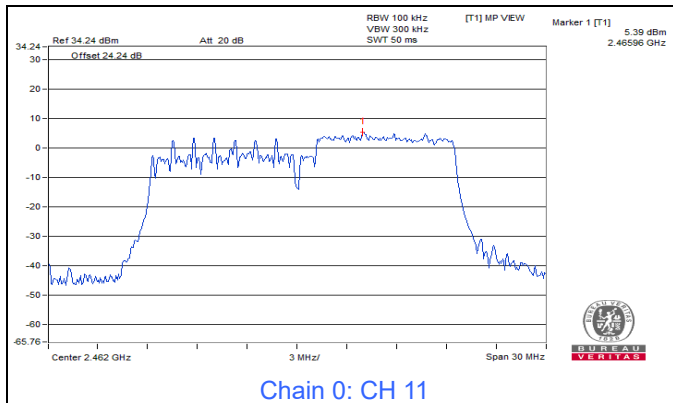


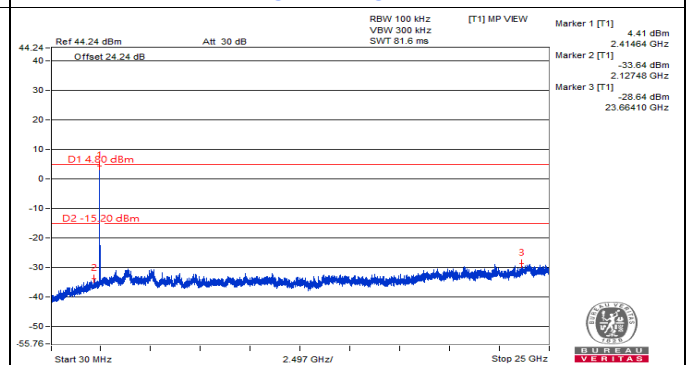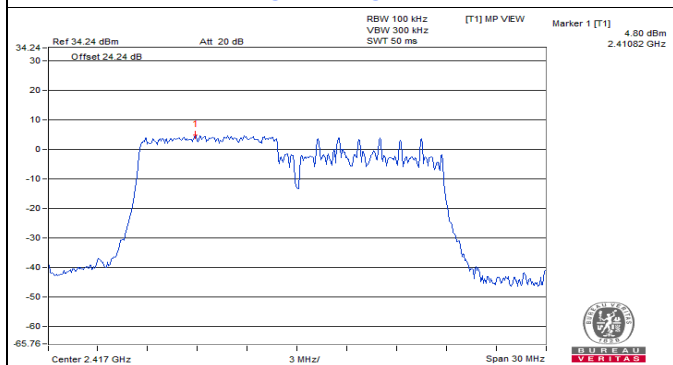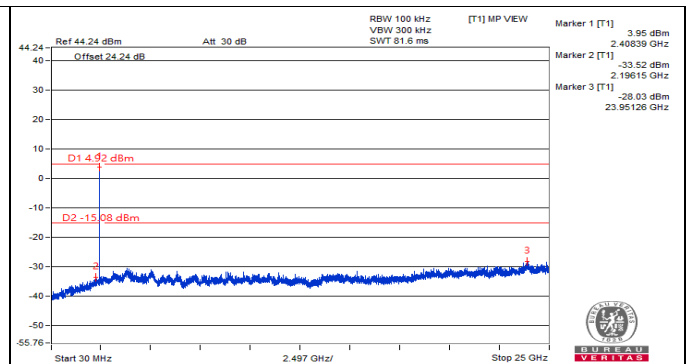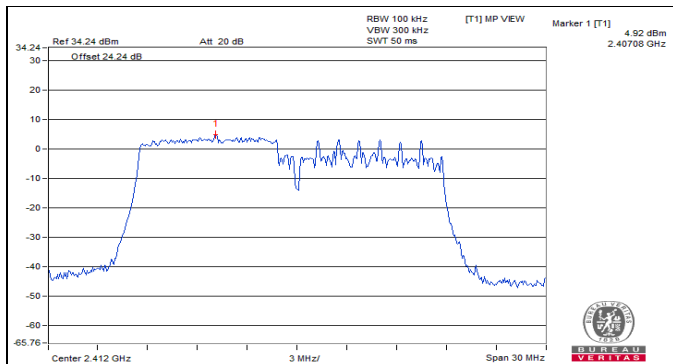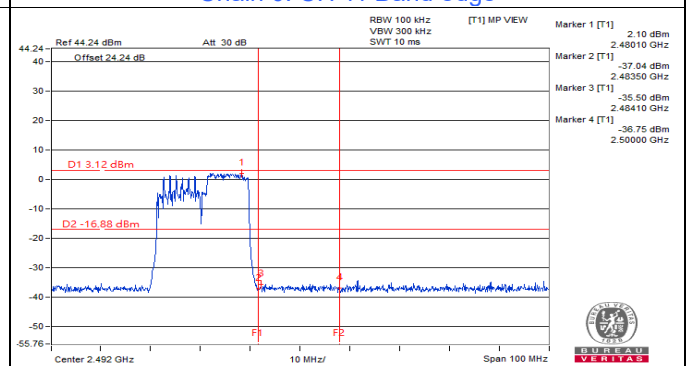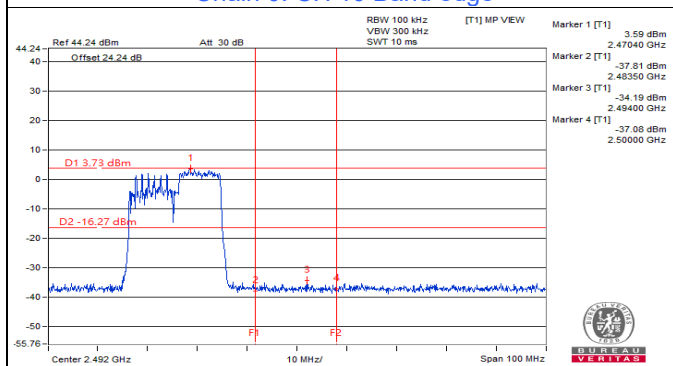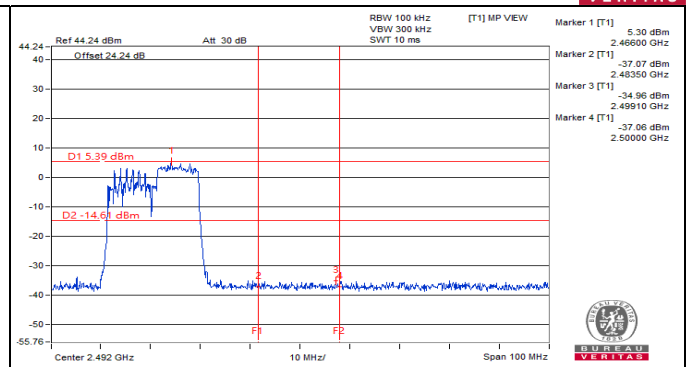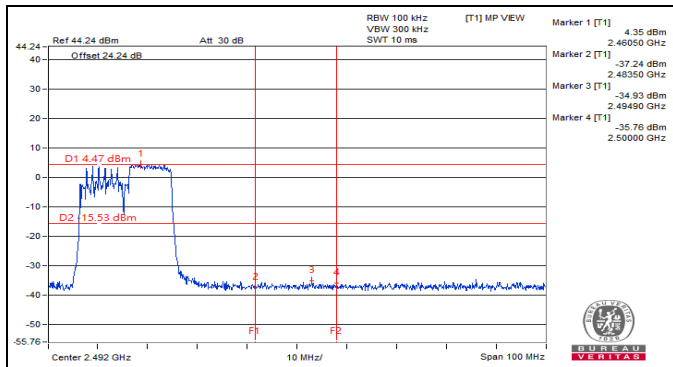




BUREAU
VERITAS

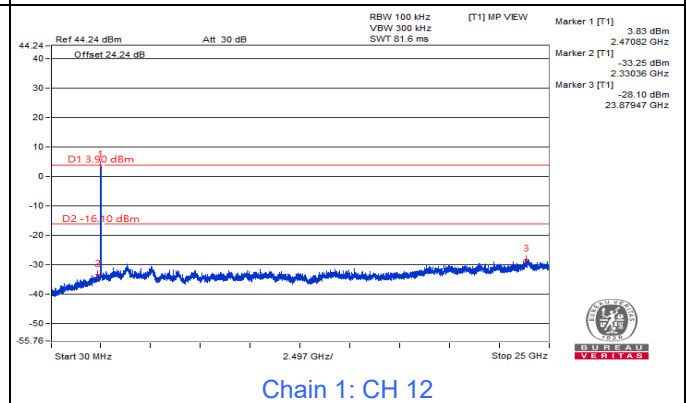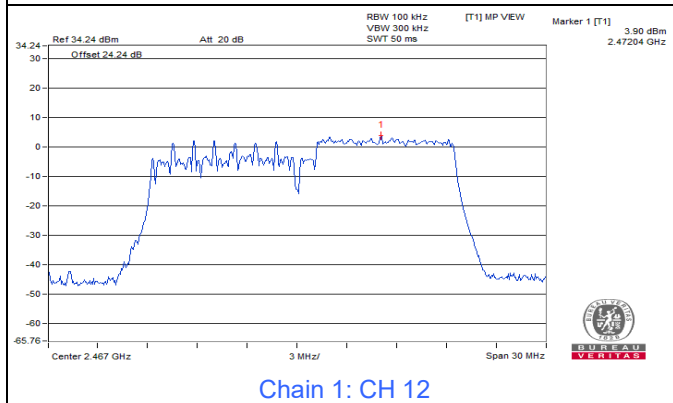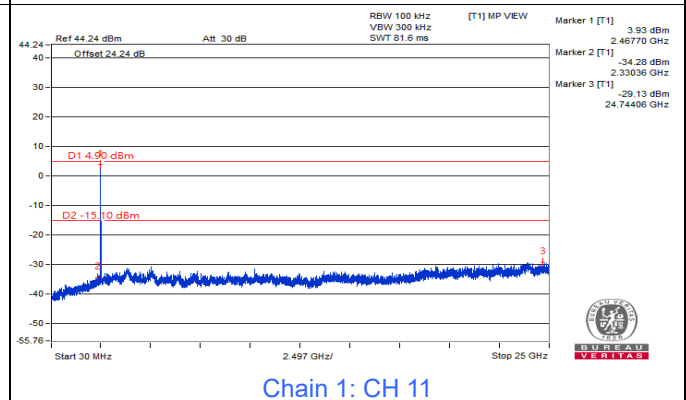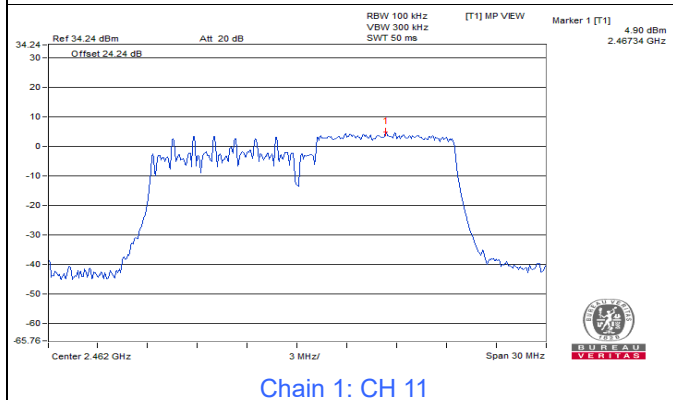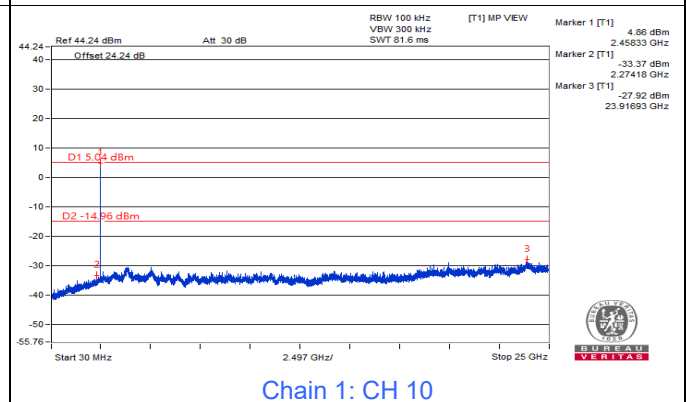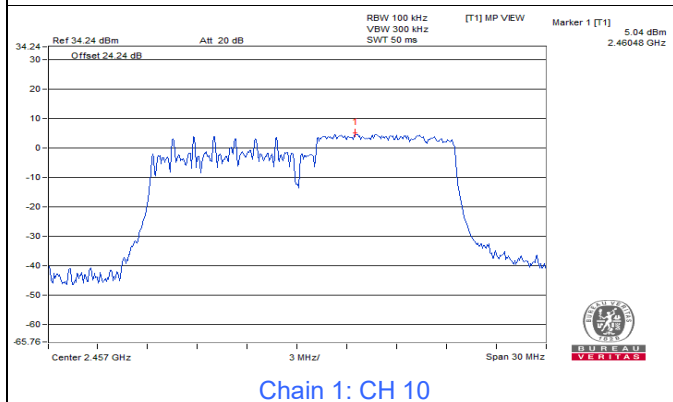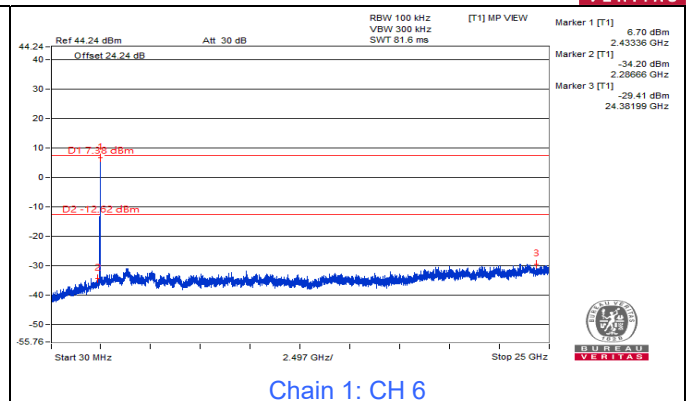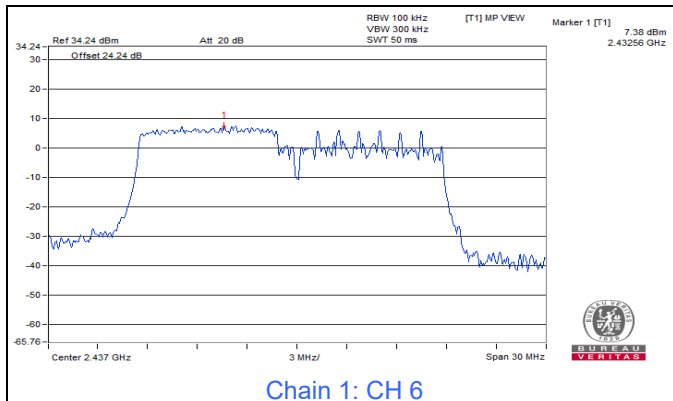

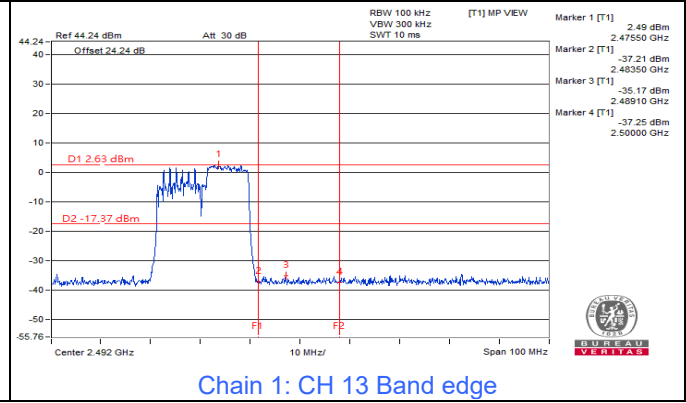
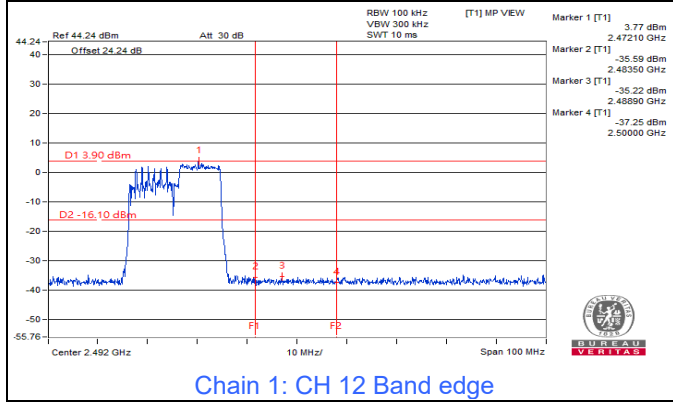
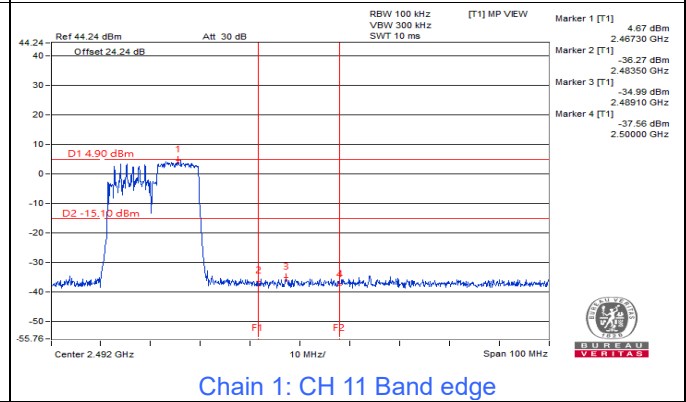
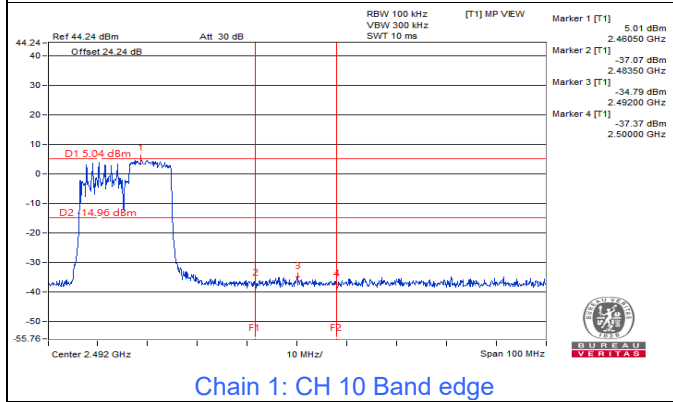
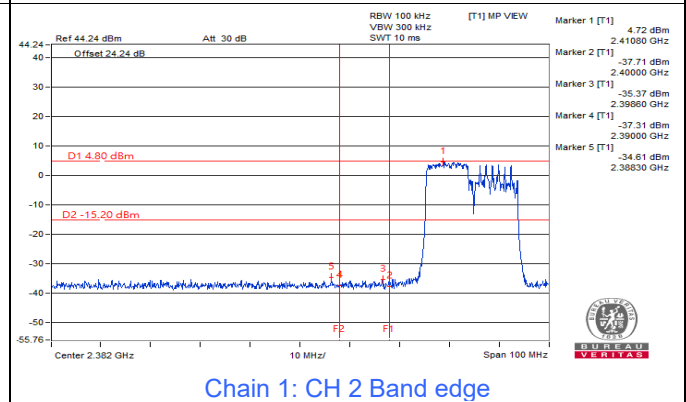
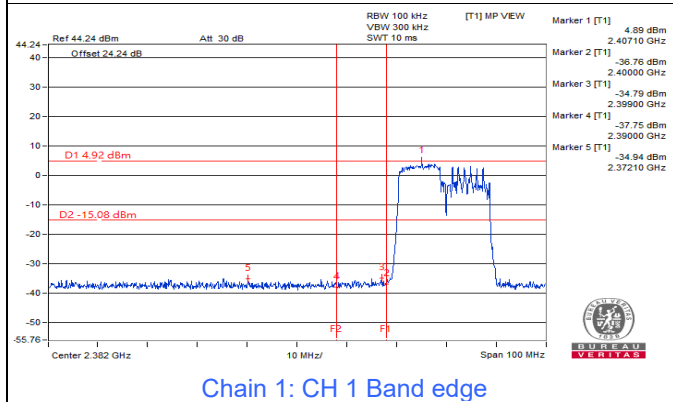
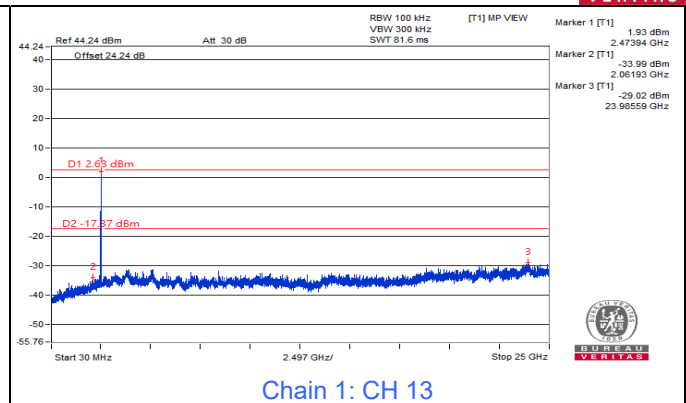
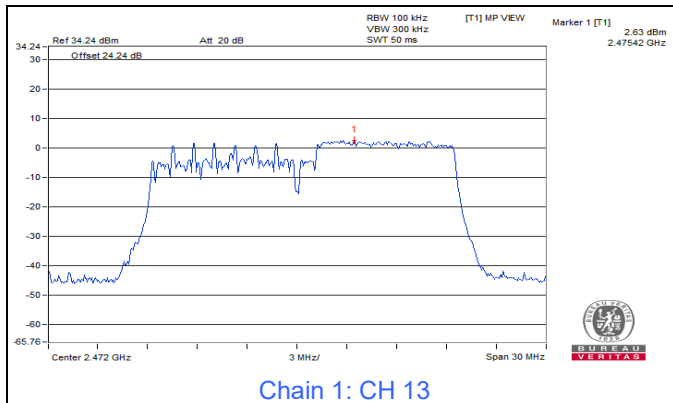










802.11be (EHT20) 52+26-tone MRU








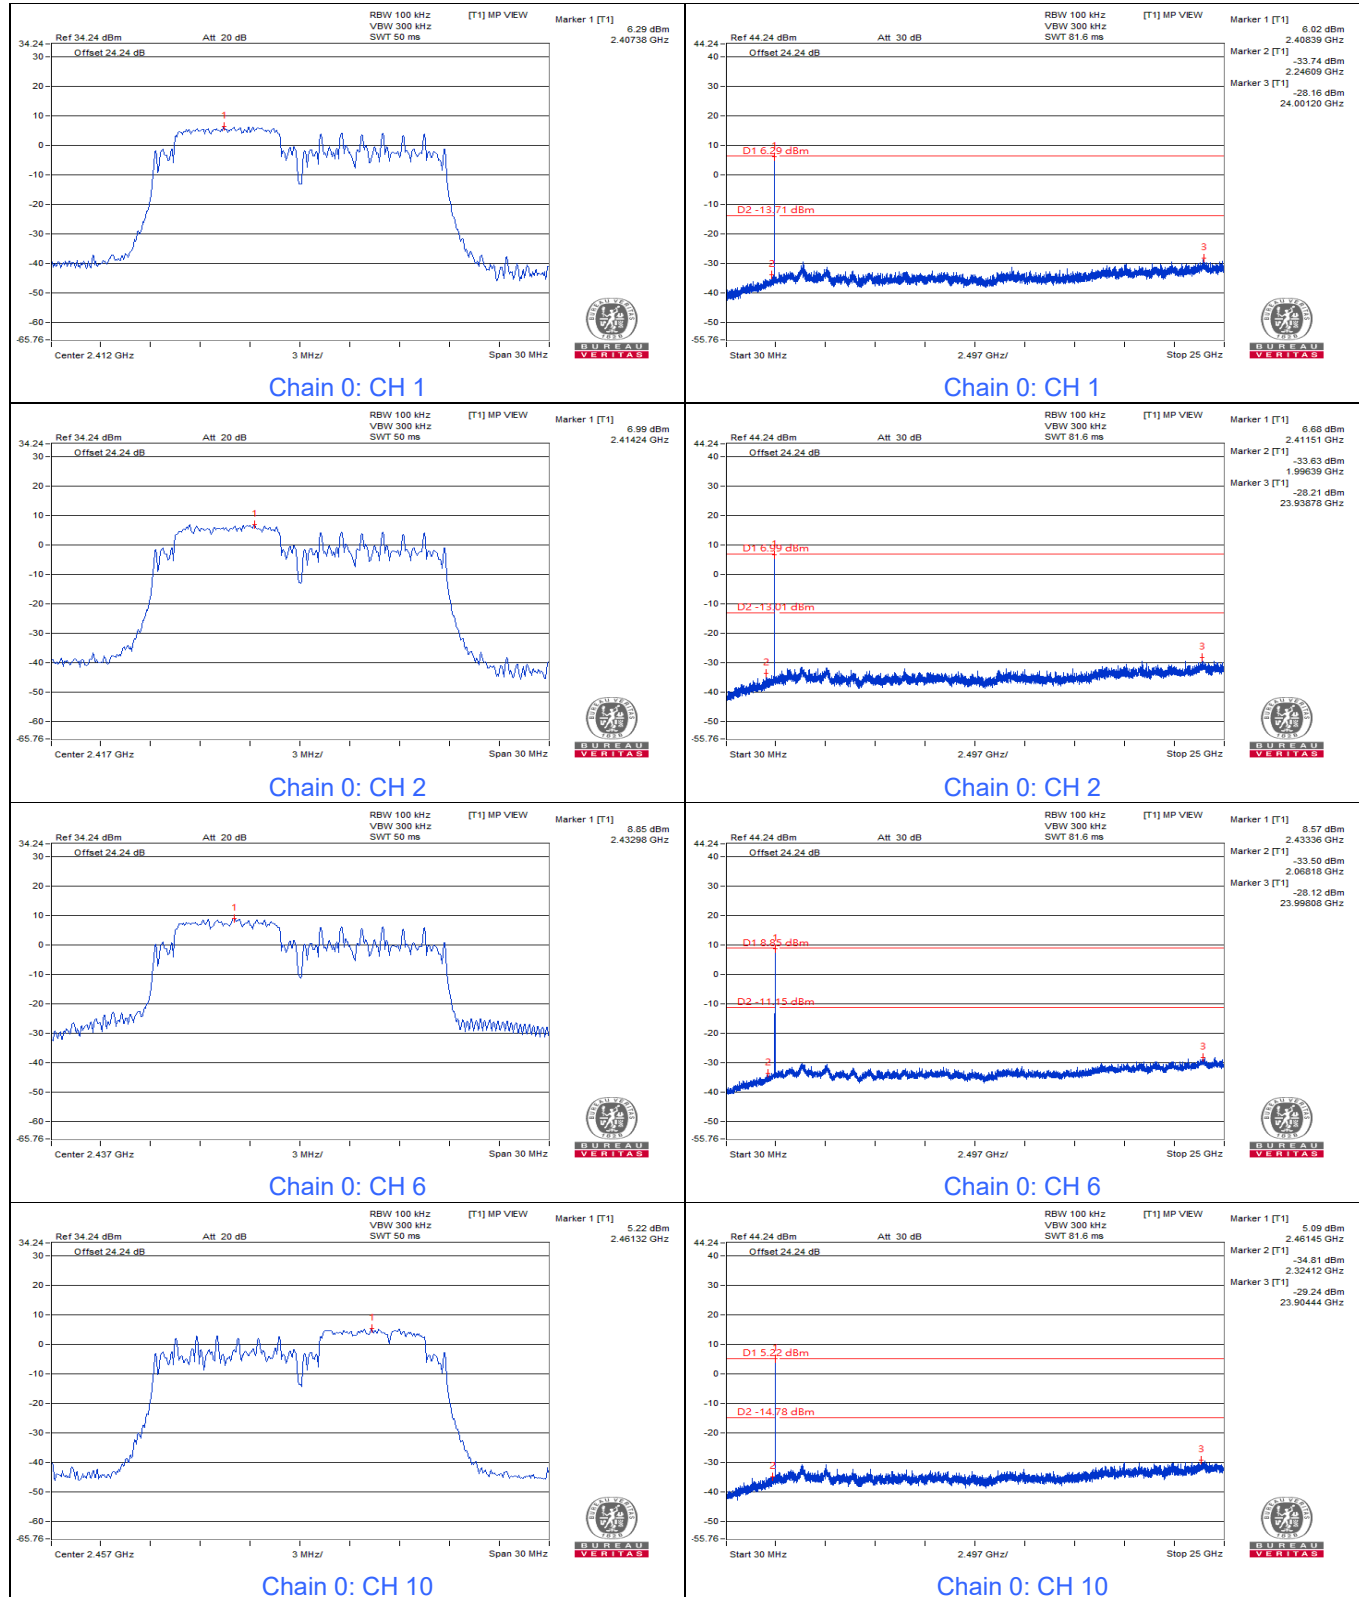












BUREAU
VERITAS

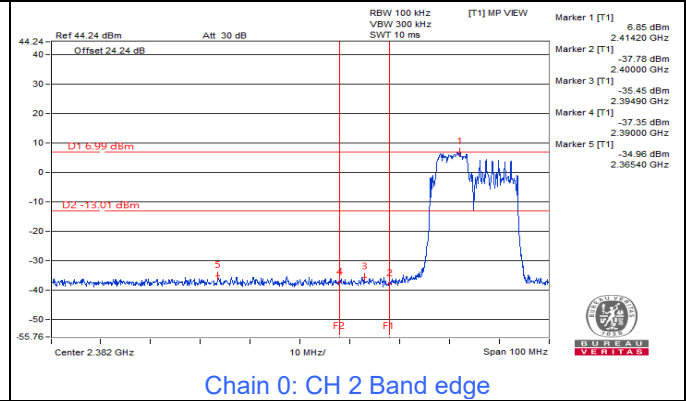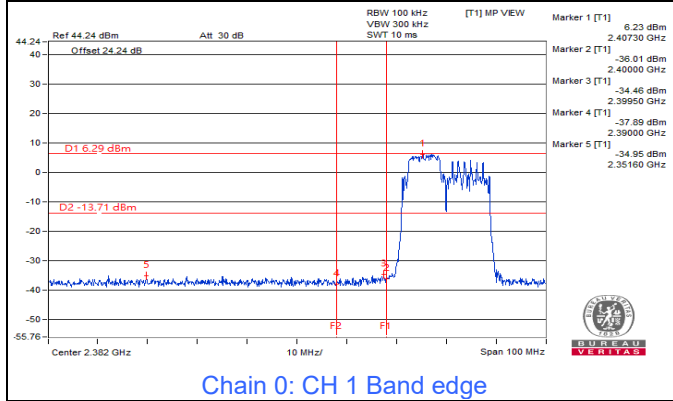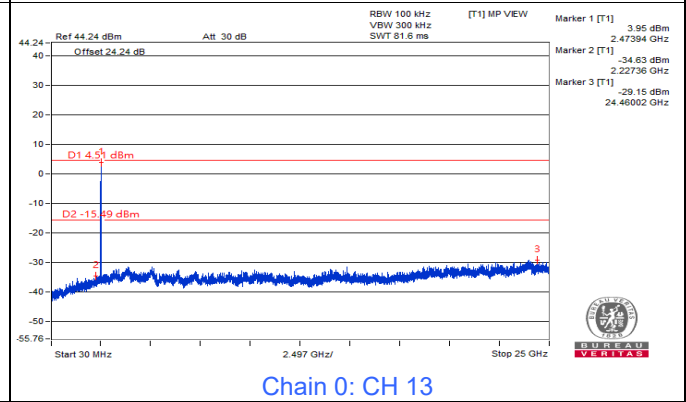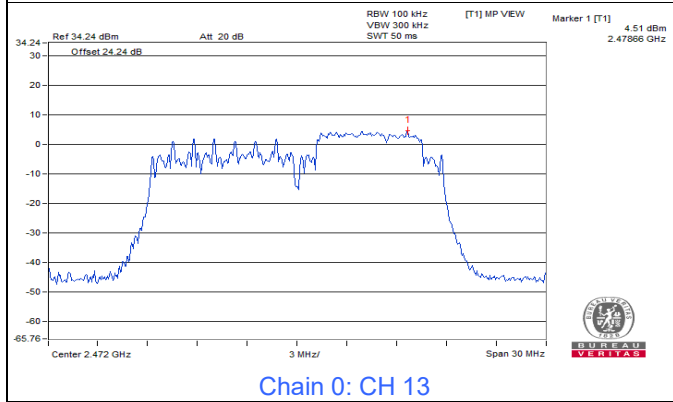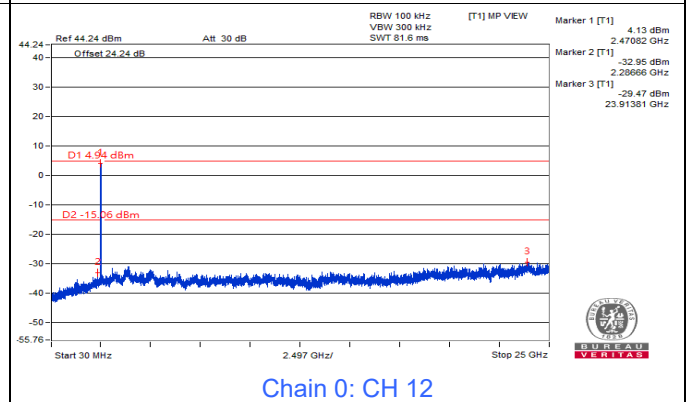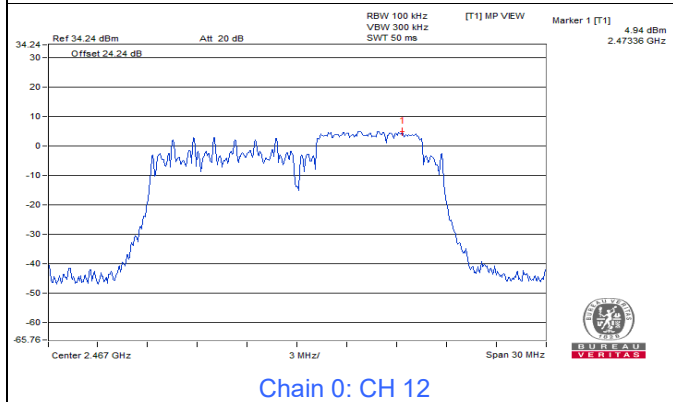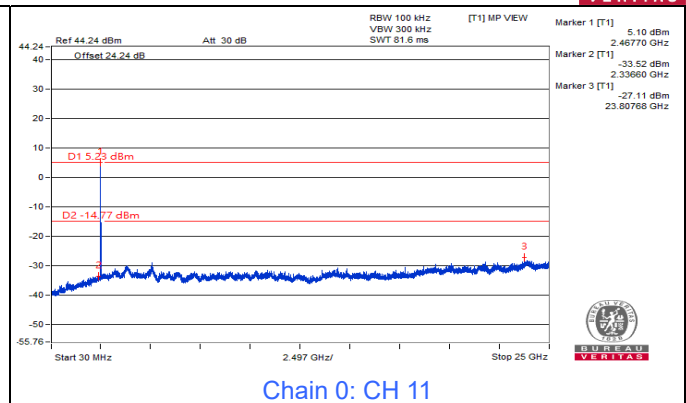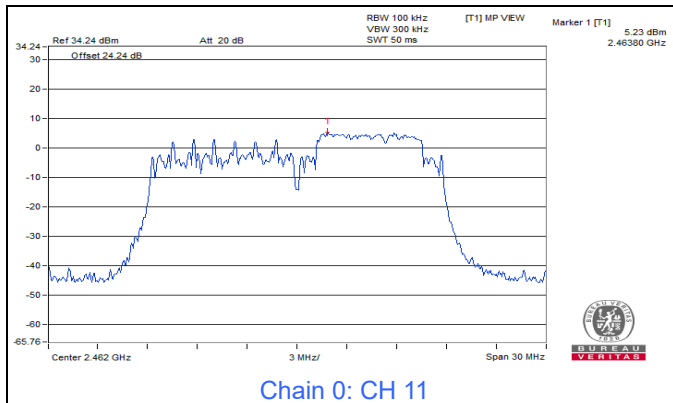


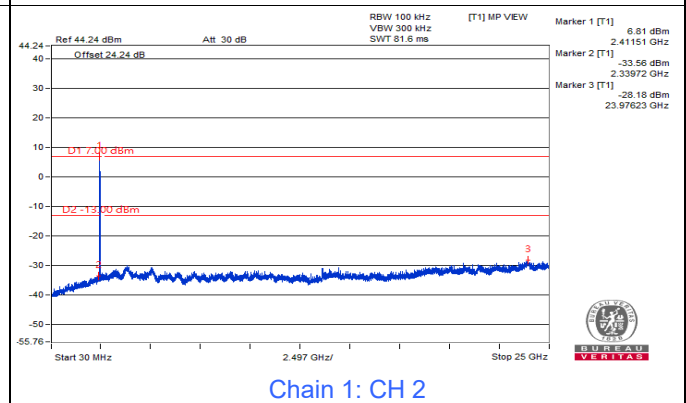
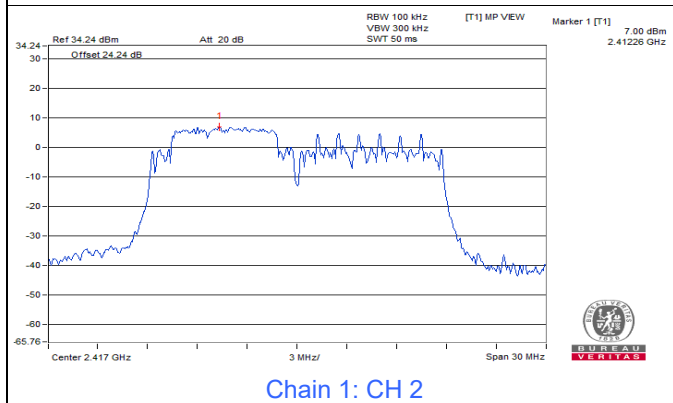
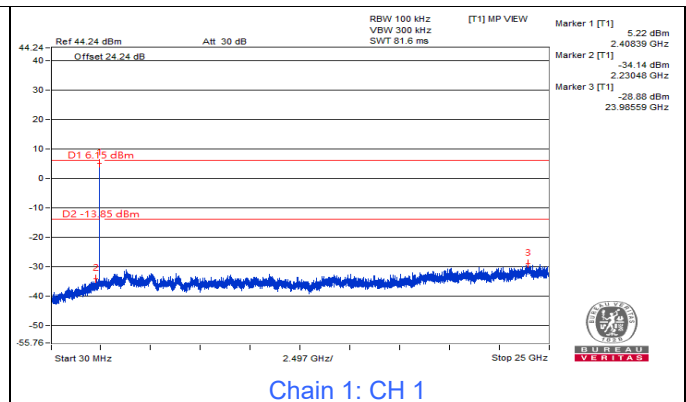
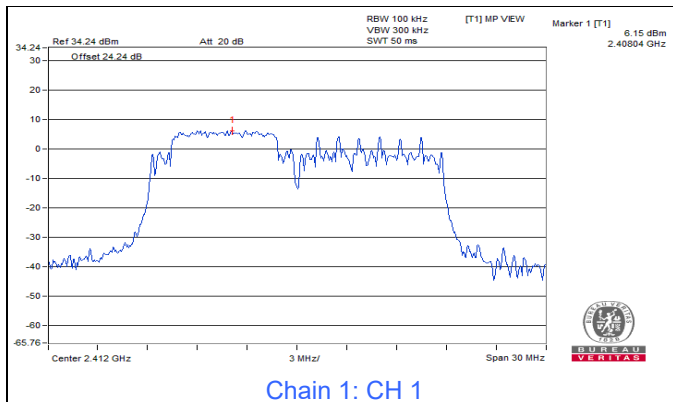
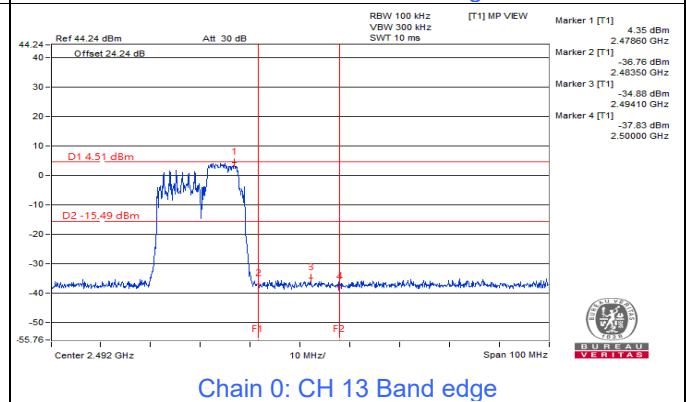
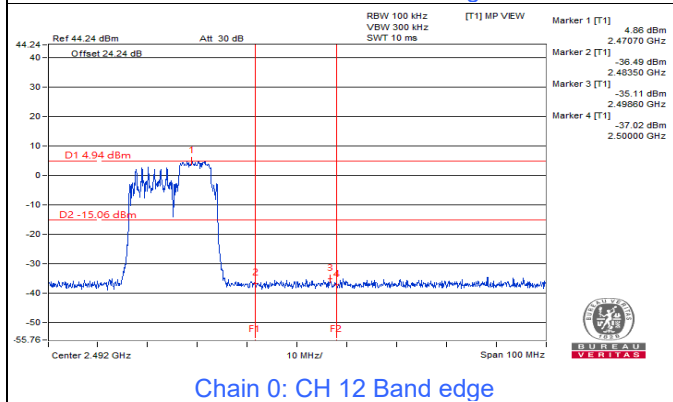
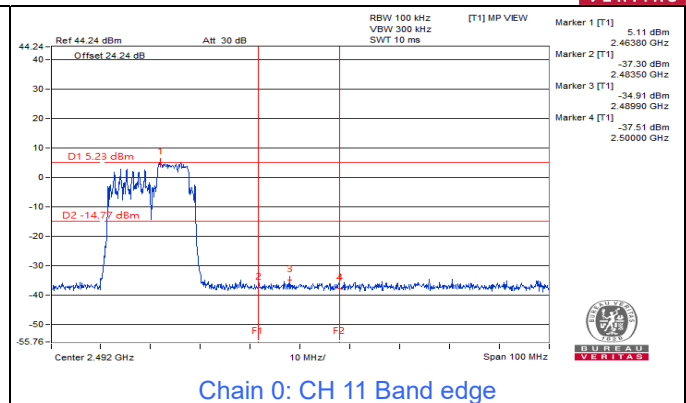
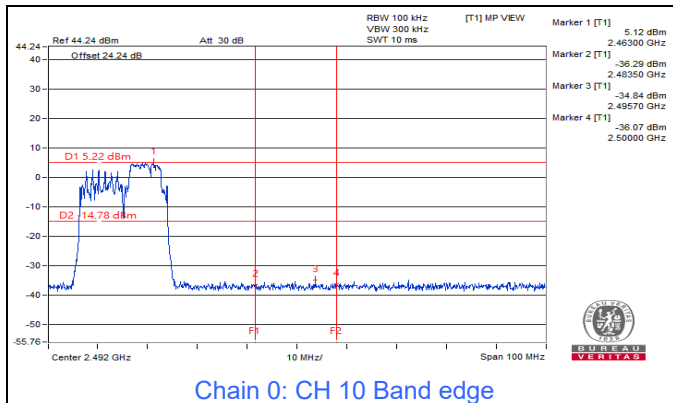


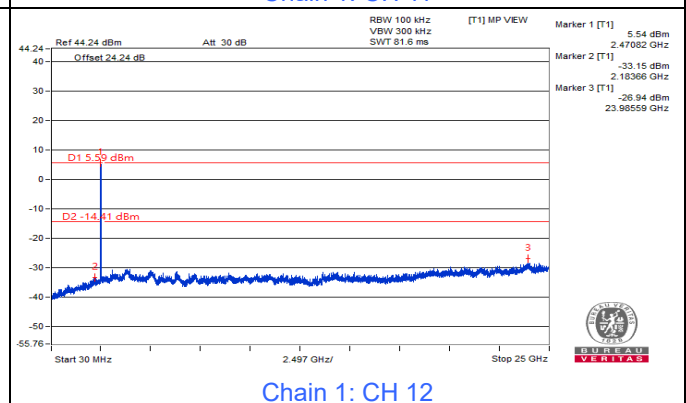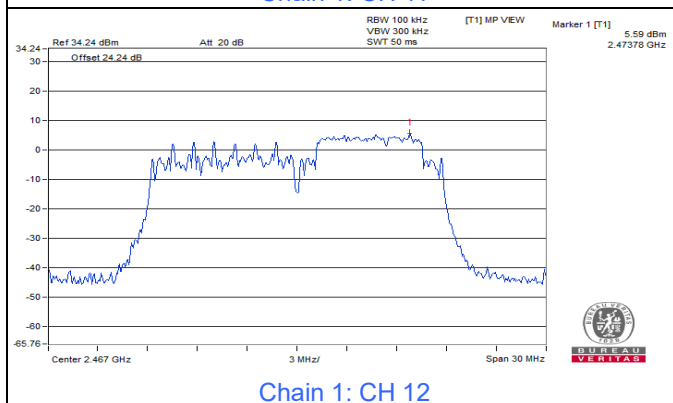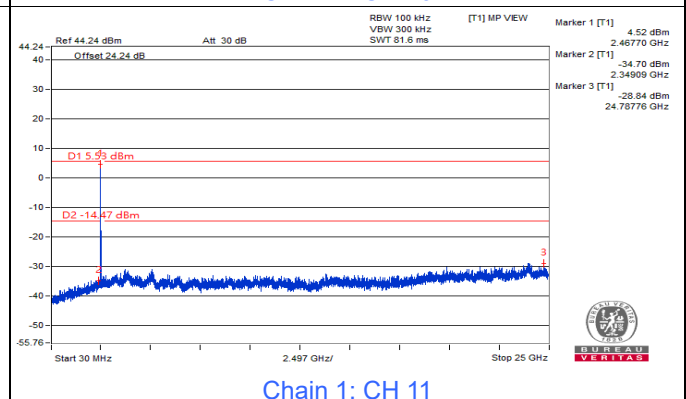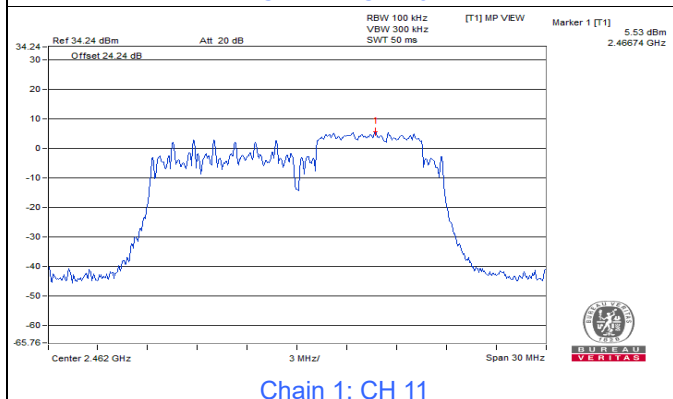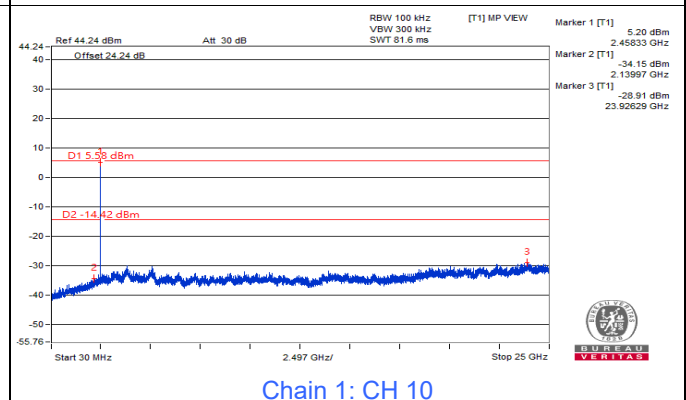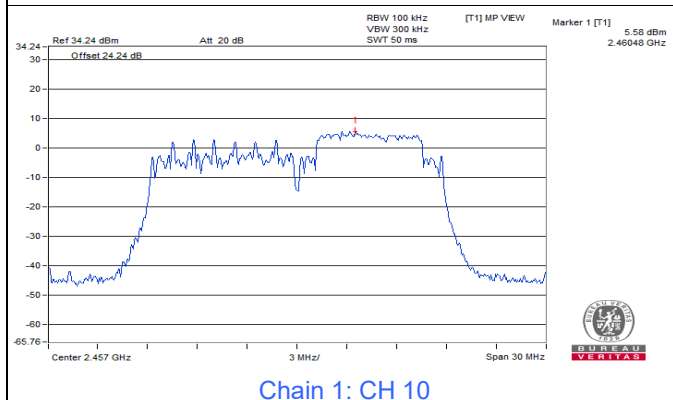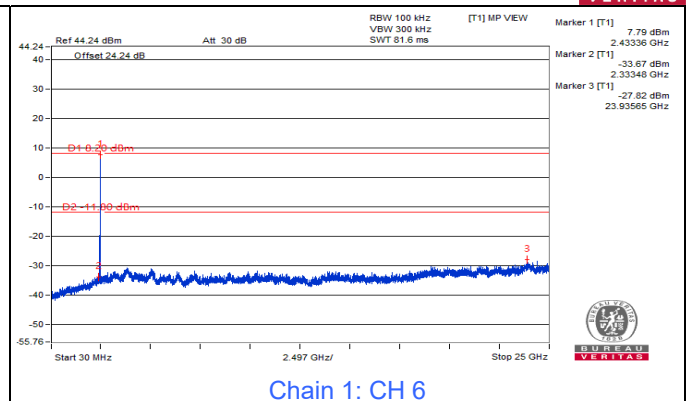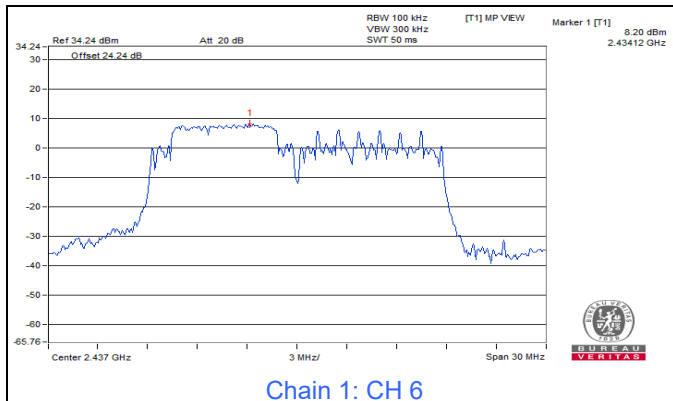


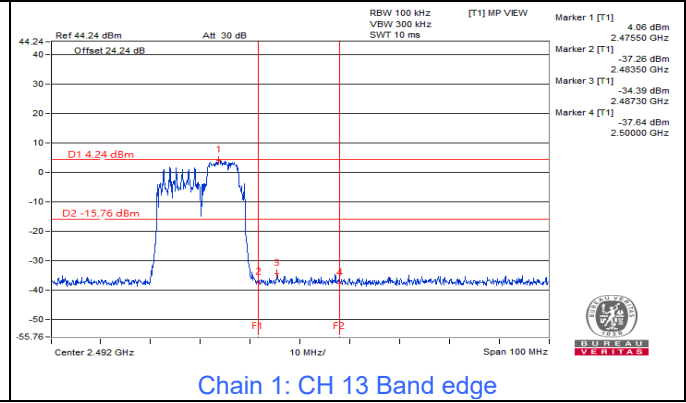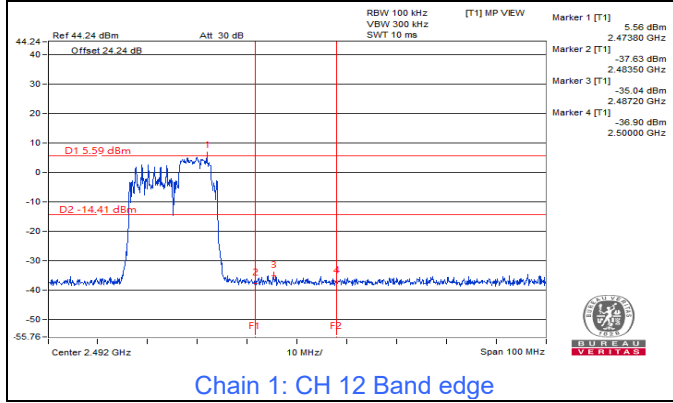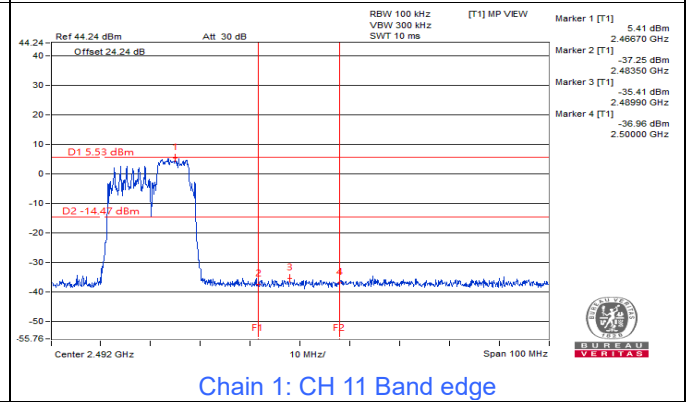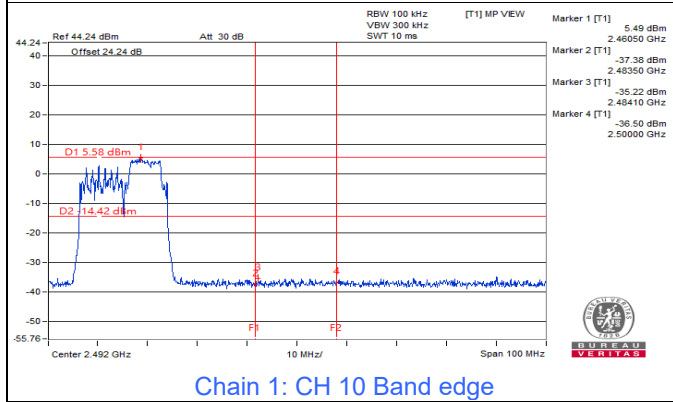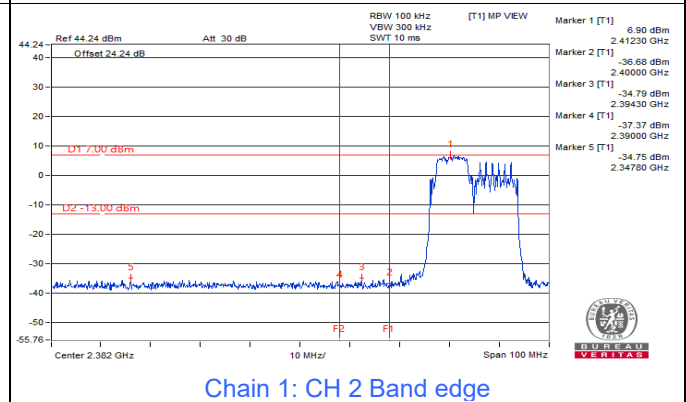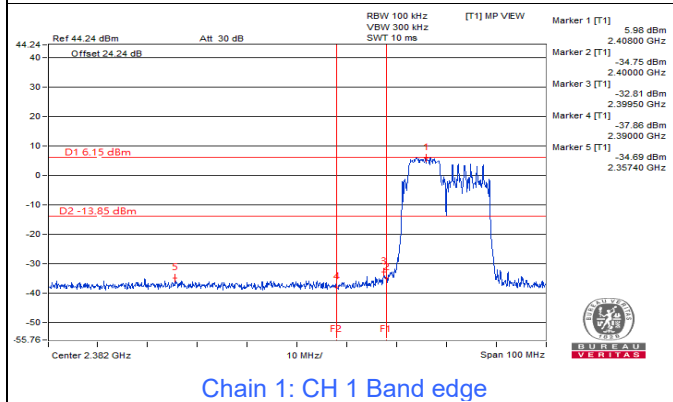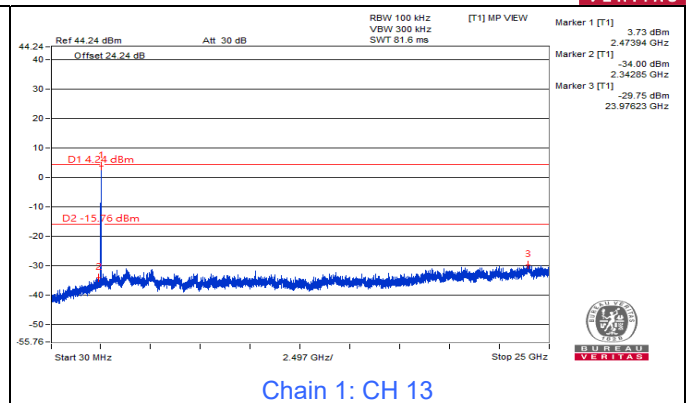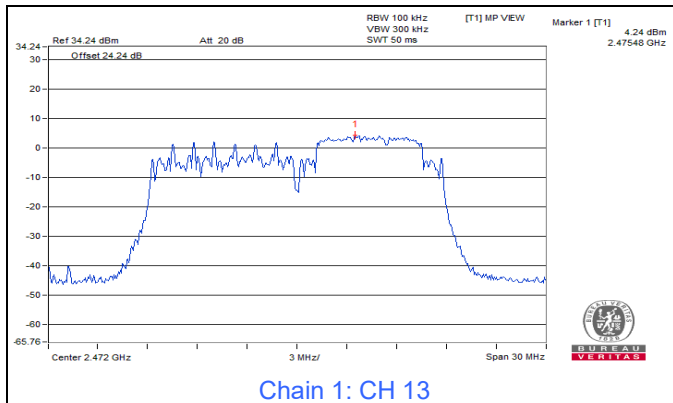


802.11be (EHT20) 106+26-tone MRU

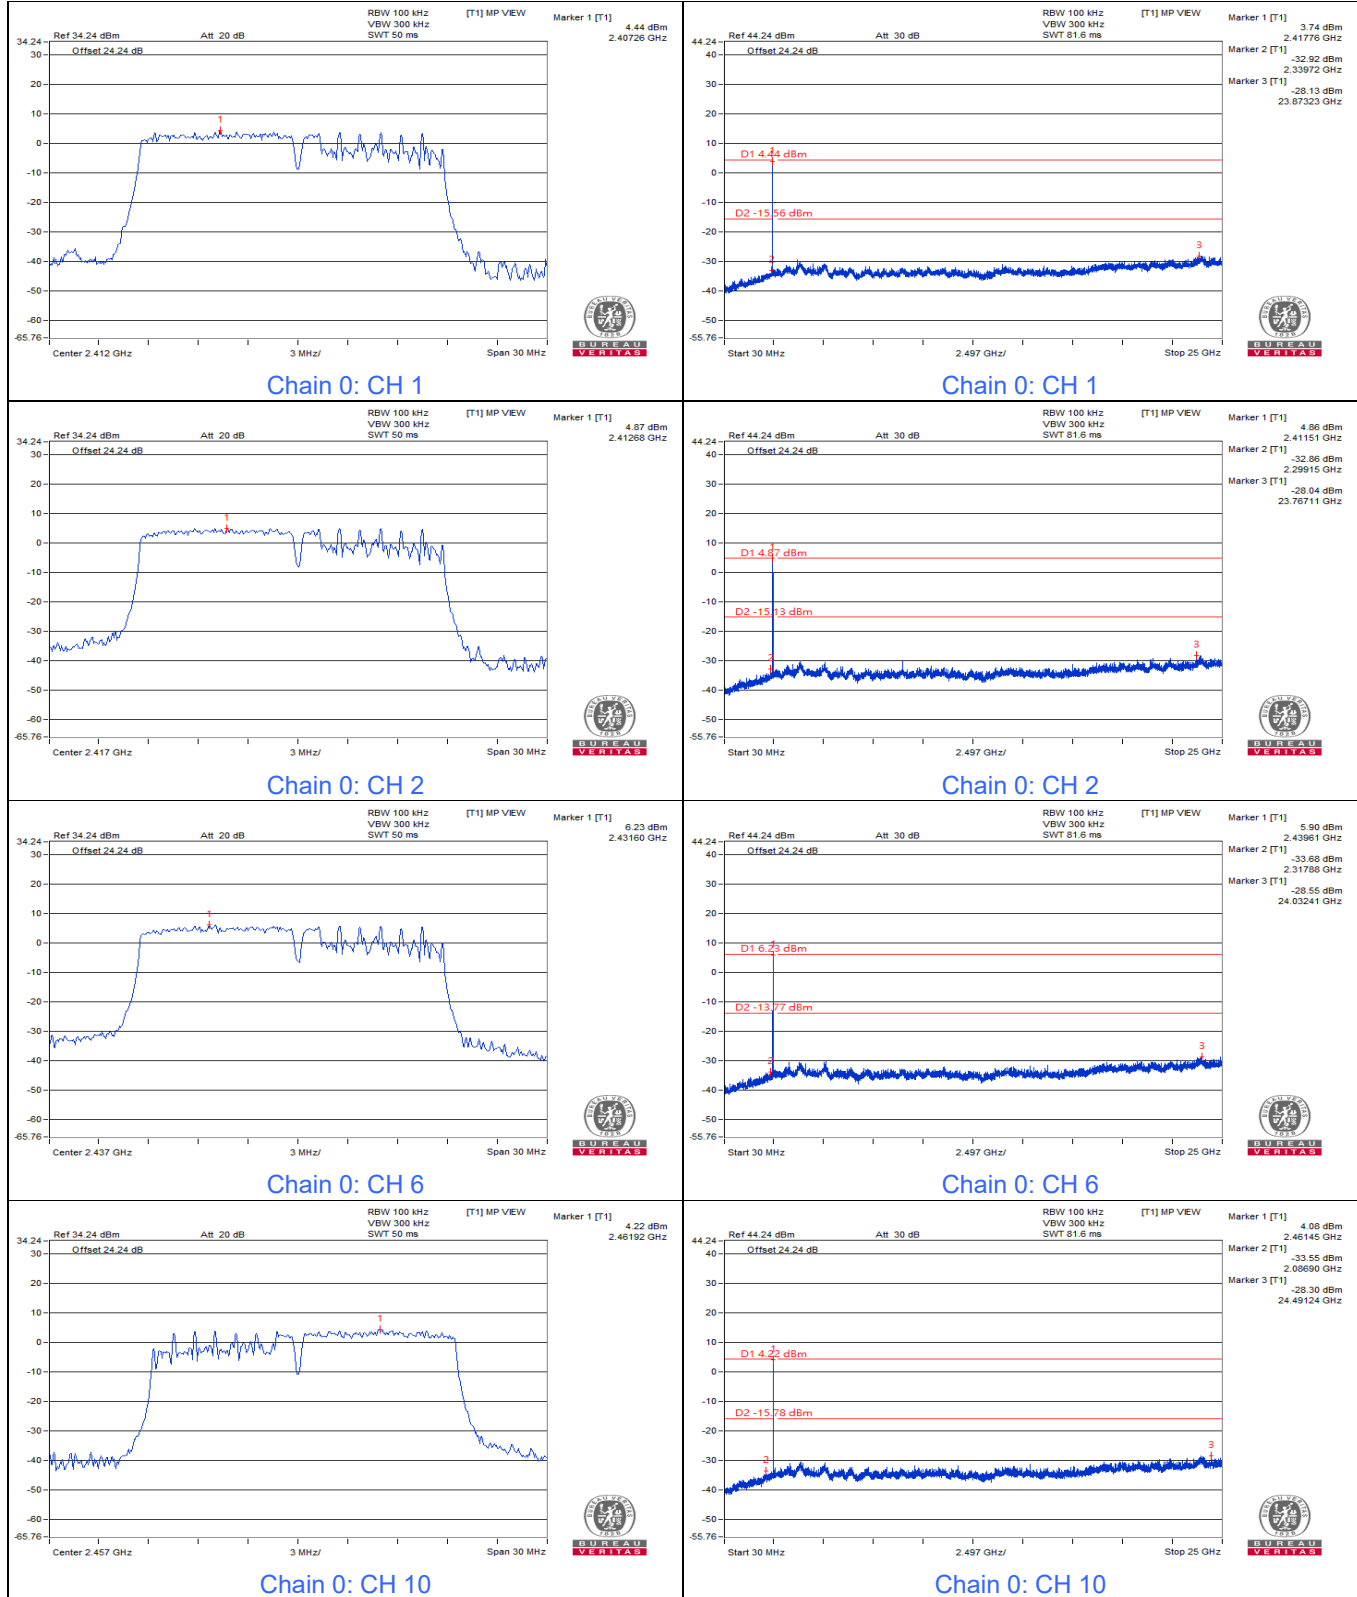

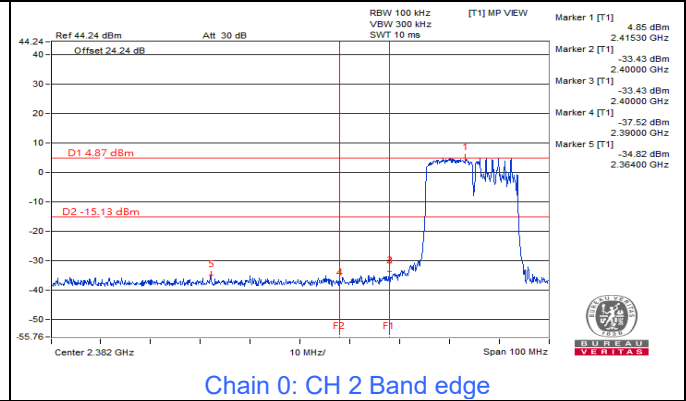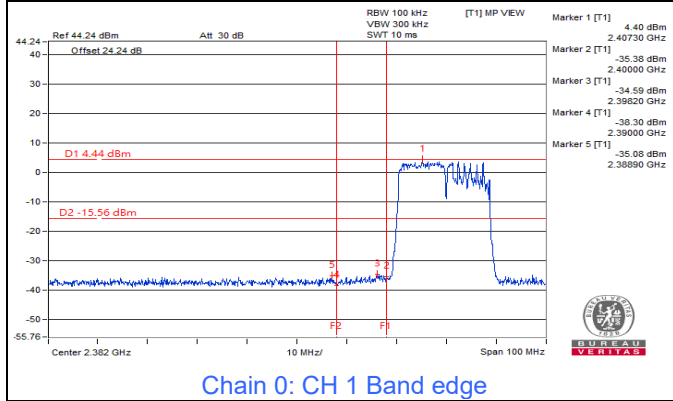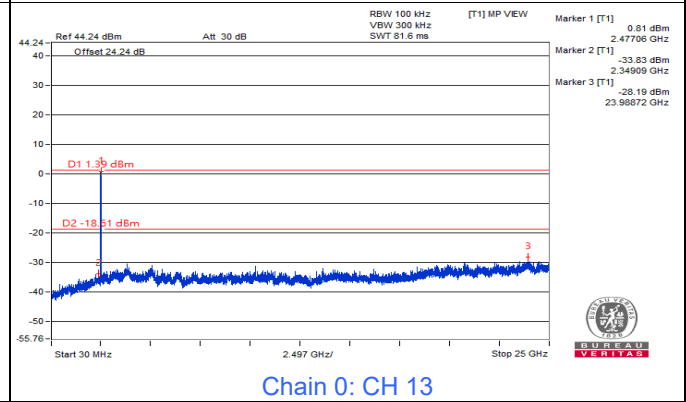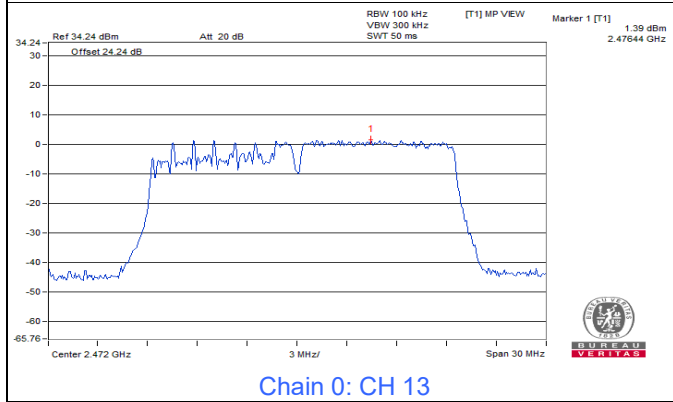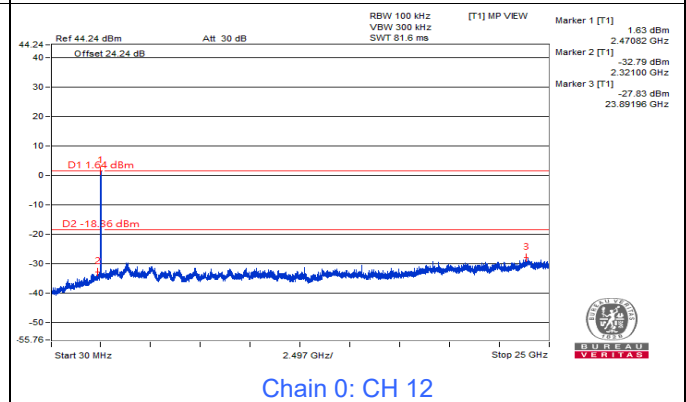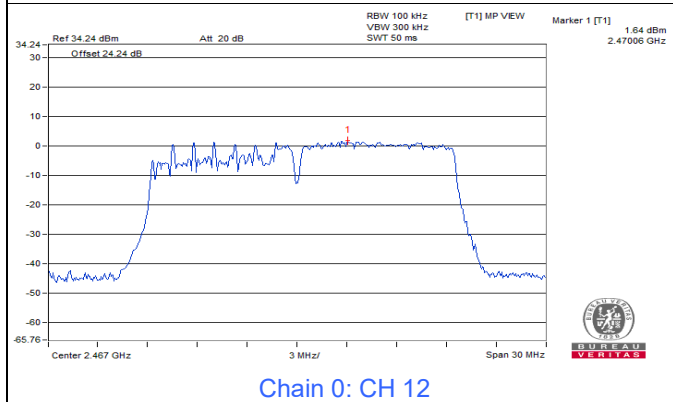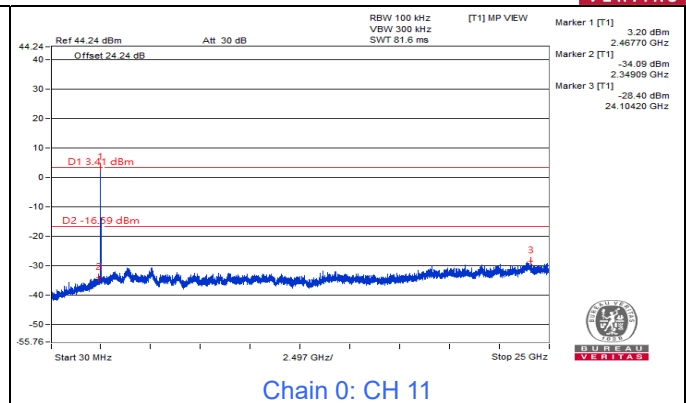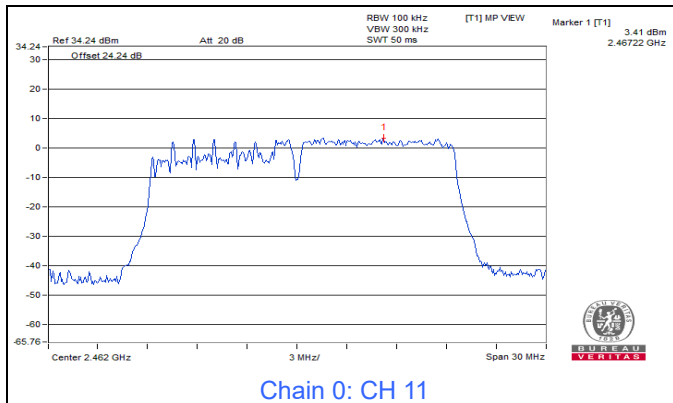


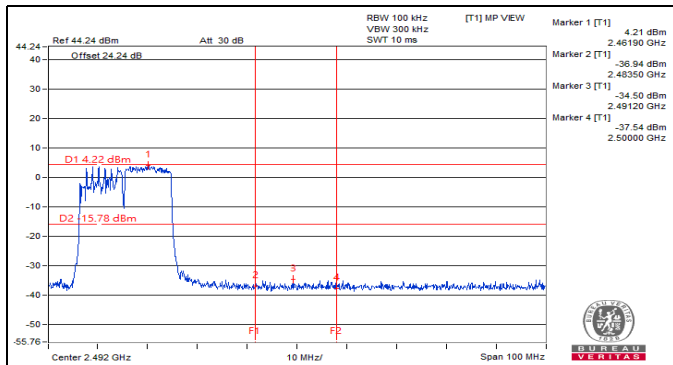


Chain 0: CH 10 Band edge

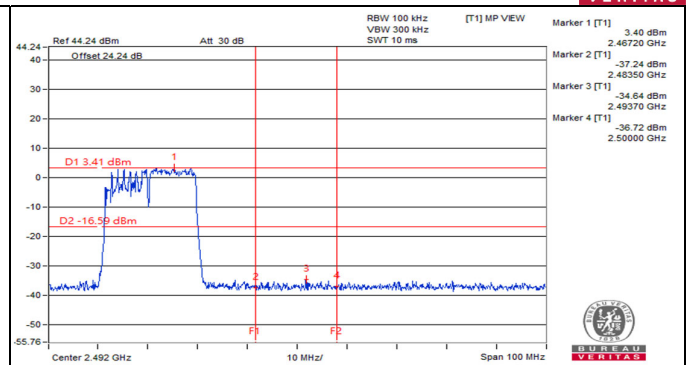


Chain 0: CH 11 Band edge

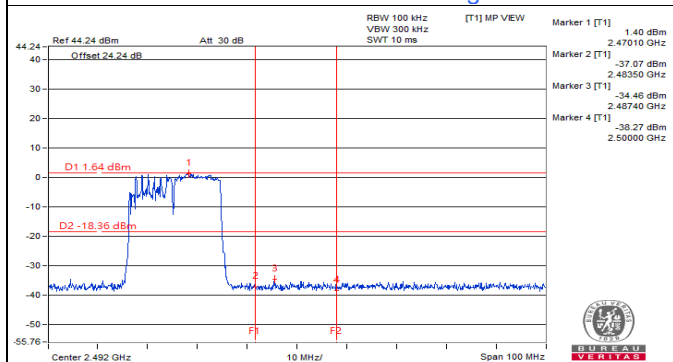


Chain 0: CH 12 Band edge

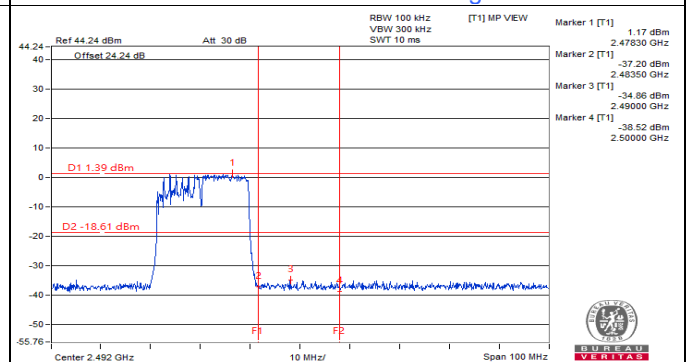


Chain 0: CH 13 Band edge

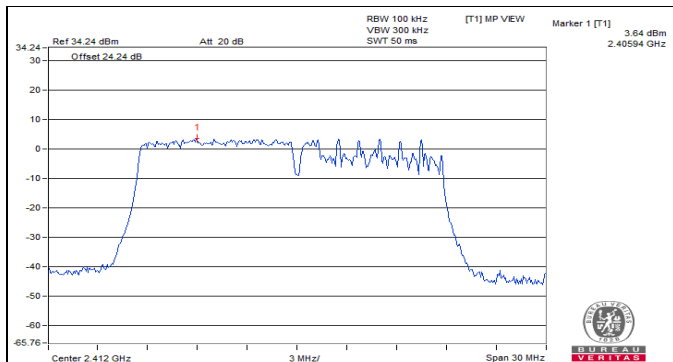


Chain 1: CH 1

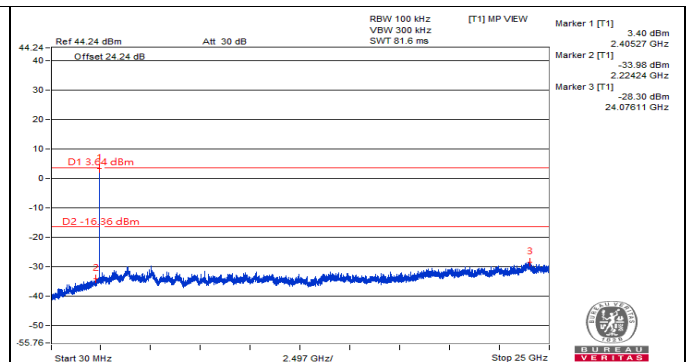









Chain 1: CH 1








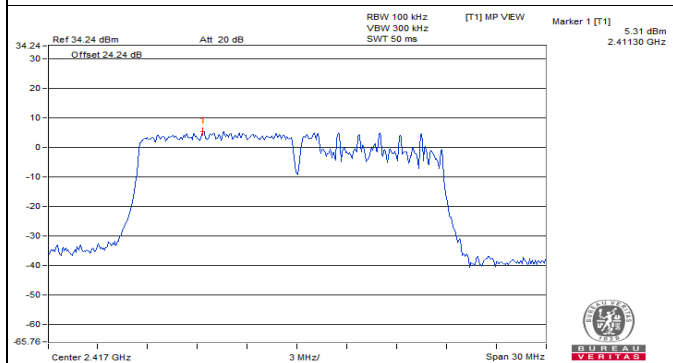


Chain 1: CH 2

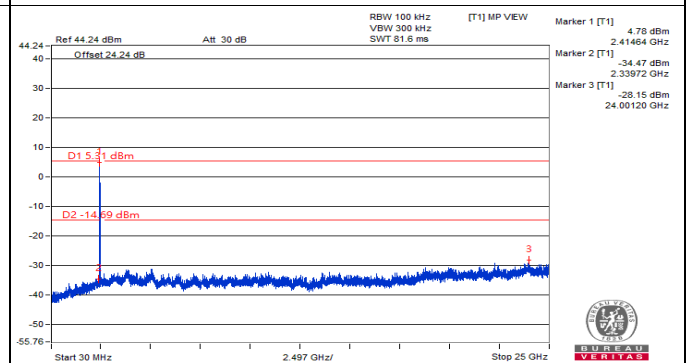

Chain 1: CH 2

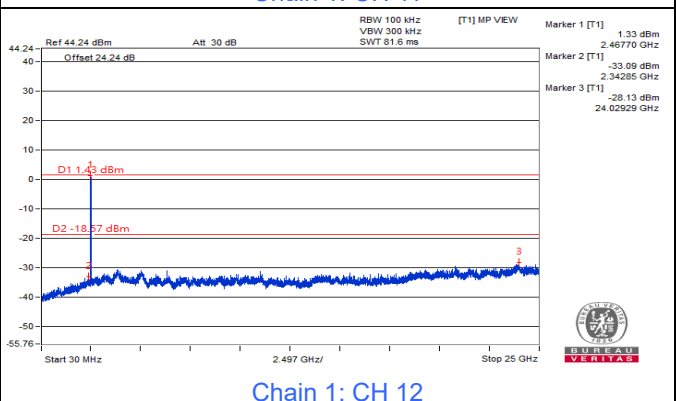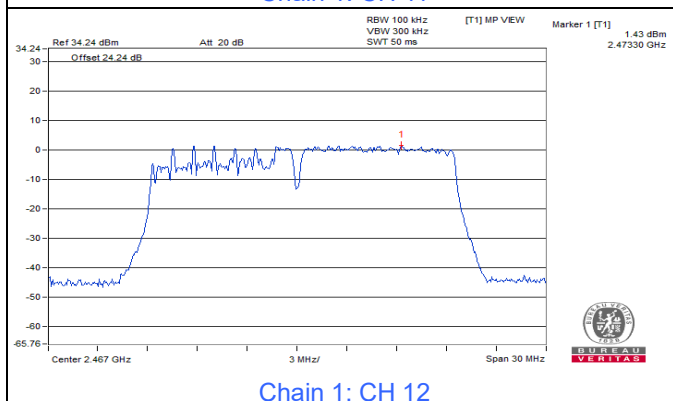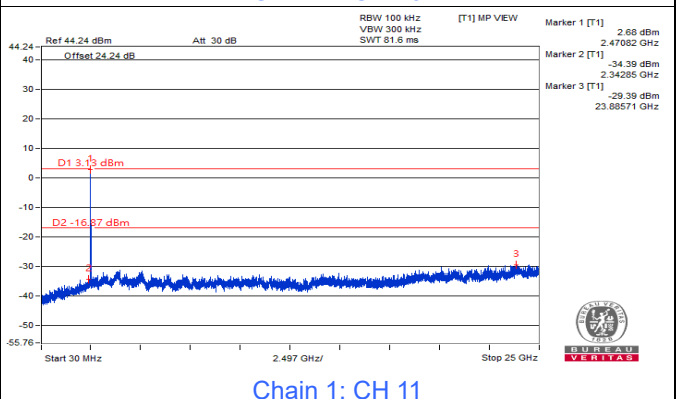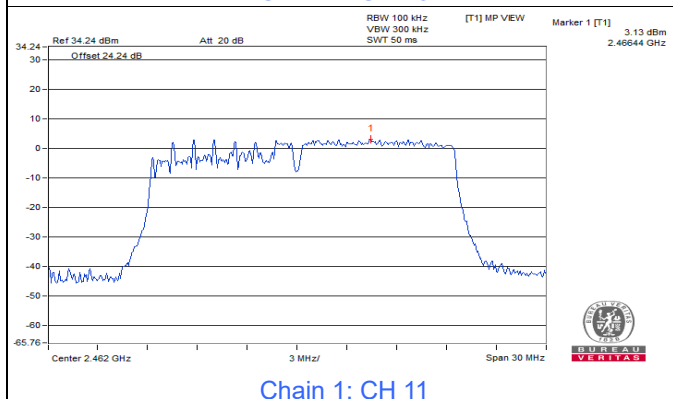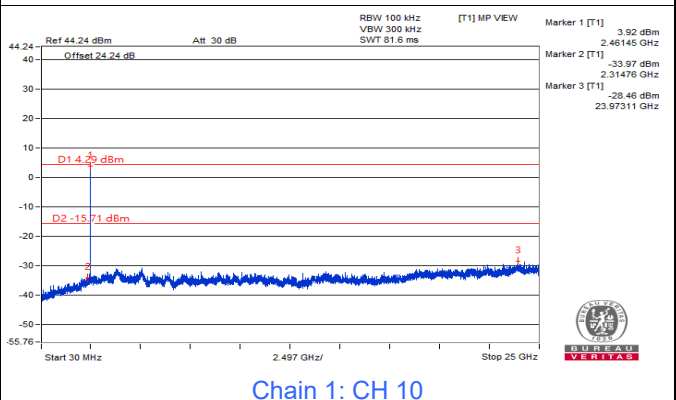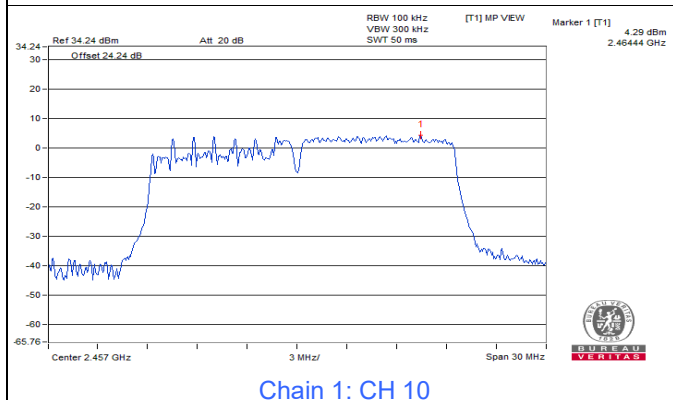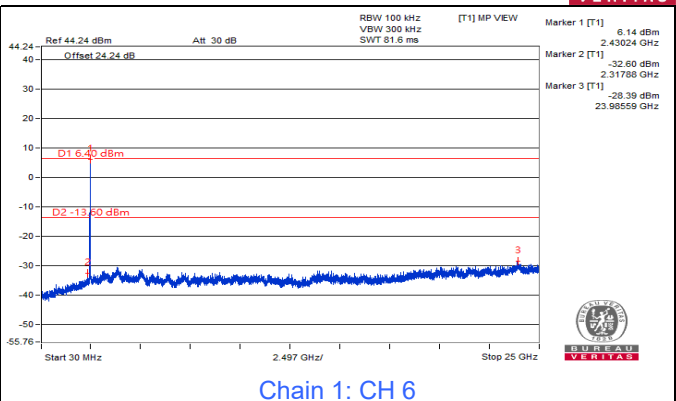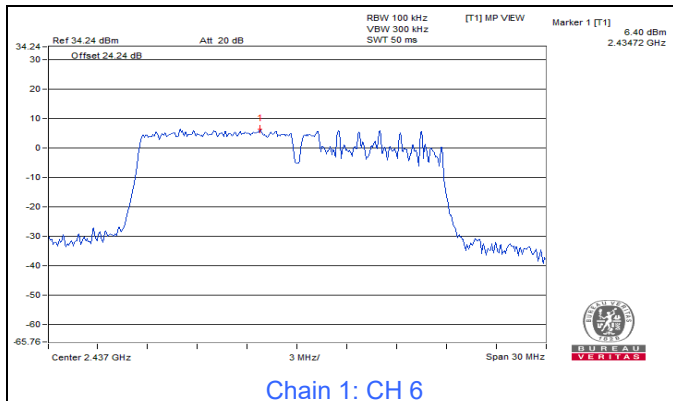

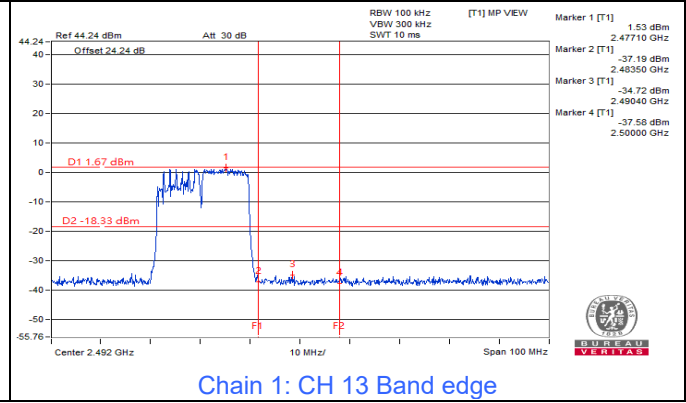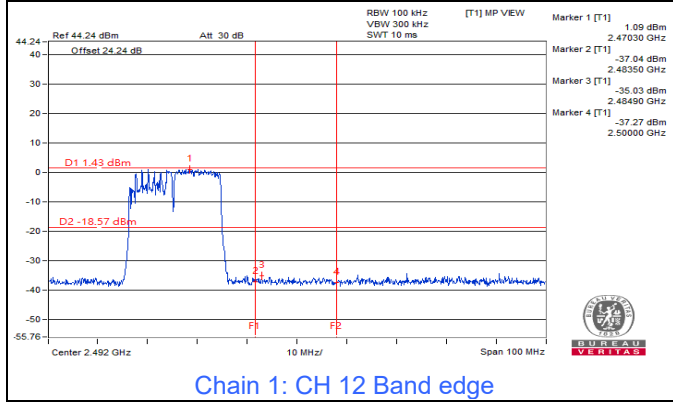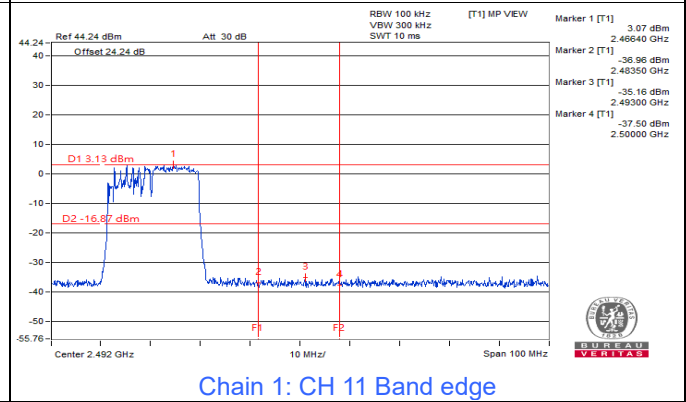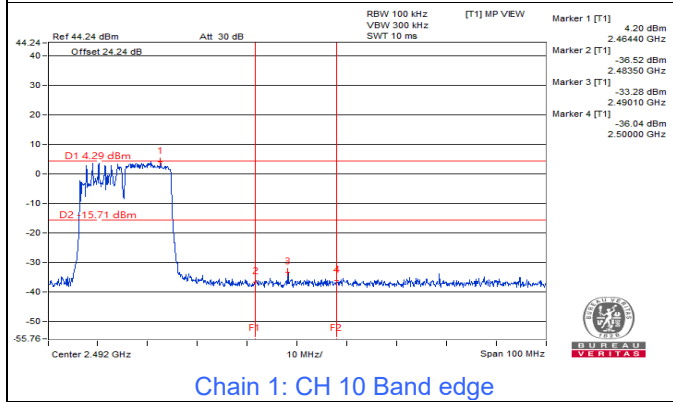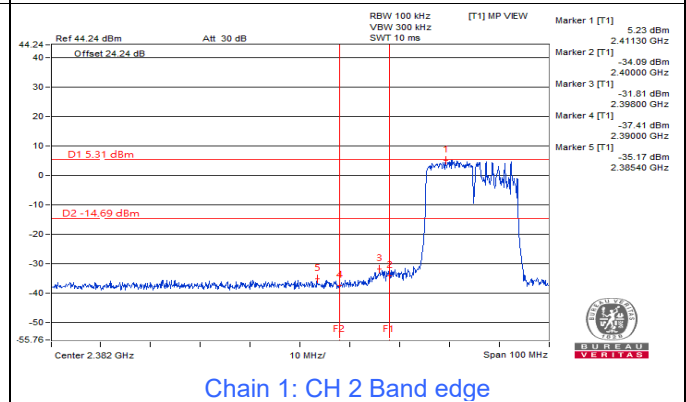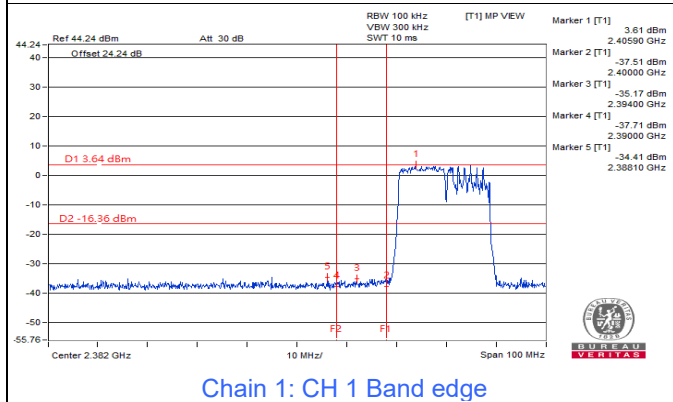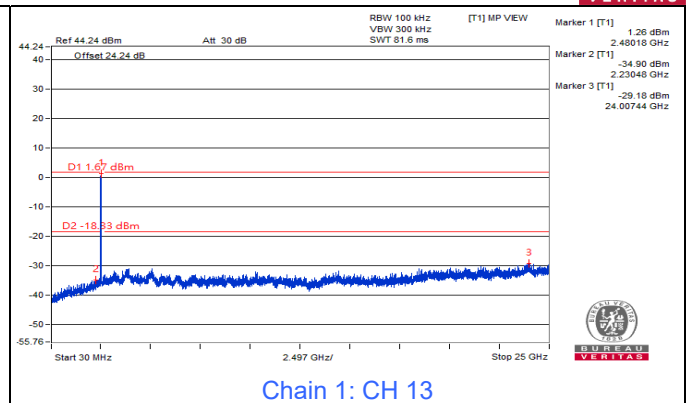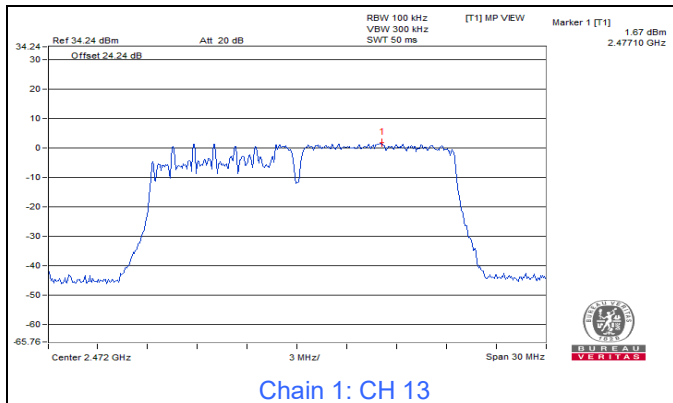

7.5 AC Power Conducted Emissions

Mode A


2Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Stars Liu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.96	40.76	21.20	50.72	31.16	66.00	56.00	-15.28	-24.84
2	0.18906	9.96	38.98	25.76	48.94	35.72	64.08	54.08	-15.14	-18.36
3	0.20859	9.96	35.69	18.72	45.65	28.68	63.26	53.26	-17.61	-24.58
4	2.22656	10.11	16.97	5.97	27.08	16.08	56.00	46.00	-28.92	-29.92
5	2.80469	10.15	16.02	5.88	26.17	16.03	56.00	46.00	-29.83	-29.97
6	14.51563	10.93	21.66	12.44	32.59	23.37	60.00	50.00	-27.41	-26.63

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

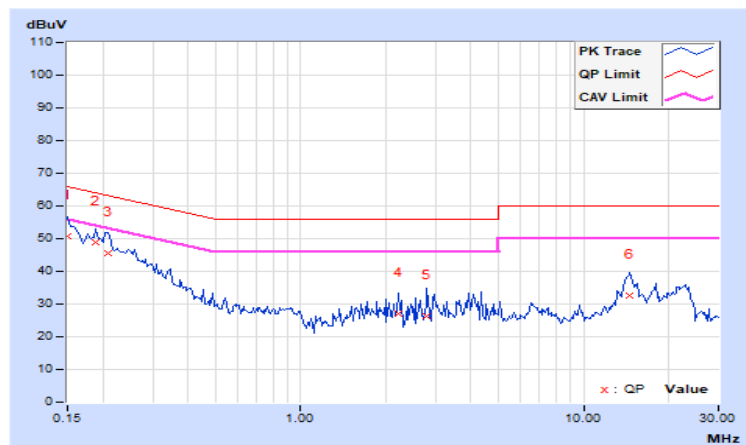


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Stars Liu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.98	40.55	25.41	50.53	35.39	66.00	56.00	-15.47	-20.61
2	0.15781	9.98	38.39	20.93	48.37	30.91	65.58	55.58	-17.21	-24.67
3	0.20469	9.97	36.62	19.11	46.59	29.08	63.42	53.42	-16.83	-24.34
4	0.28281	9.95	29.26	15.36	39.21	25.31	60.73	50.73	-21.52	-25.42
5	2.84375	10.10	16.28	5.33	26.38	15.43	56.00	46.00	-29.62	-30.57
6	14.41406	10.68	22.47	13.25	33.15	23.93	60.00	50.00	-26.85	-26.07
7	22.61719	10.99	18.58	5.64	29.57	16.63	60.00	50.00	-30.43	-33.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

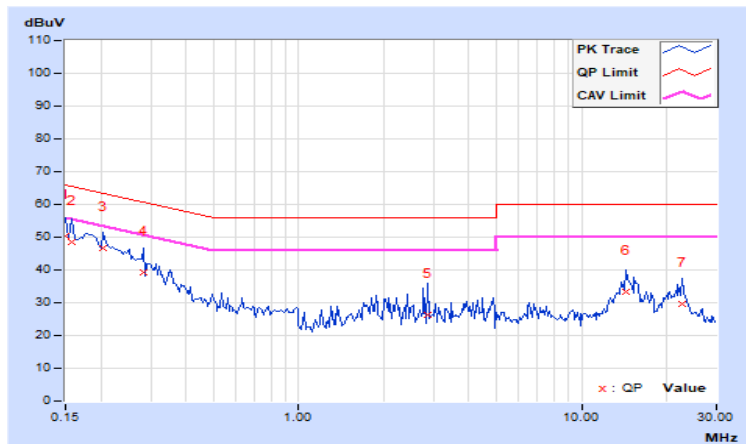

7.6 Unwanted Emissions below 1 GHz

Mode A


1Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.83	27.3 PK	40.0	-12.7	3.00 H	51	41.3	-14.0
2	132.97	34.1 PK	43.5	-9.4	2.00 H	162	47.7	-13.6
3	166.28	35.5 PK	43.5	-8.0	2.00 H	0	48.5	-13.0
4	213.40	31.2 PK	43.5	-12.3	1.00 H	360	47.1	-15.9
5	399.13	30.0 PK	46.0	-16.0	1.00 H	144	39.4	-9.4
6	623.37	28.2 PK	46.0	-17.8	2.00 H	80	32.7	-4.5
7	868.95	32.6 PK	46.0	-13.4	2.00 H	32	33.6	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

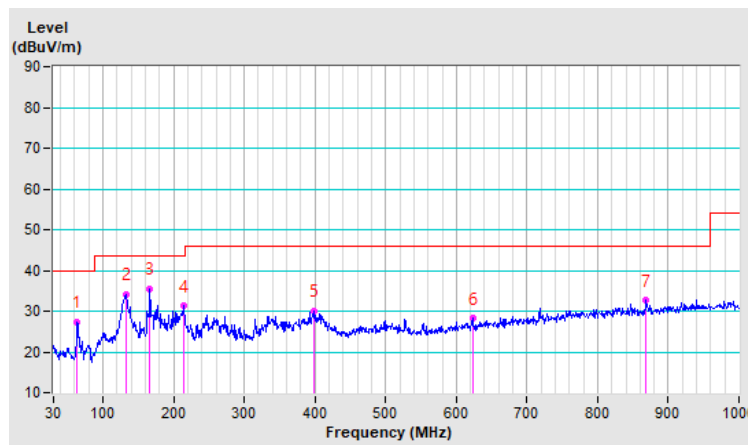


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.24	29.8 PK	40.0	-10.2	1.00 V	58	43.4	-13.6
2	82.26	28.4 PK	40.0	-11.6	1.00 V	123	46.6	-18.2
3	129.38	27.4 PK	43.5	-16.1	1.00 V	314	41.3	-13.9
4	299.13	32.2 PK	46.0	-13.8	3.00 V	360	44.1	-11.9
5	623.08	30.2 PK	46.0	-15.8	1.00 V	299	34.7	-4.5
6	951.82	32.7 PK	46.0	-13.3	2.00 V	360	32.0	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

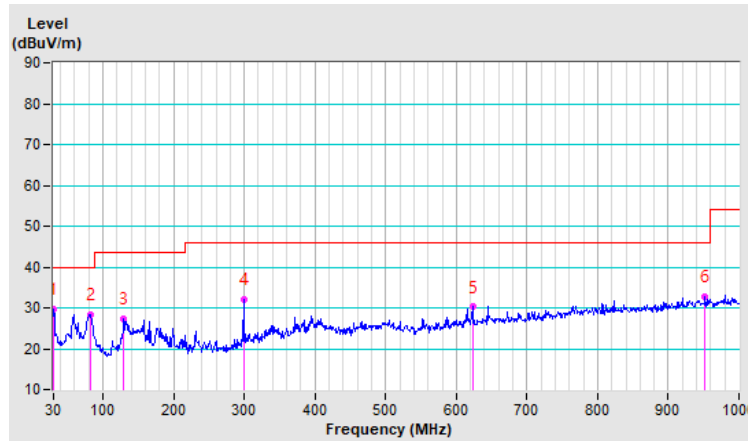


2Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.25	25.3 PK	40.0	-14.7	3.00 H	246	39.3	-14.0
2	99.55	34.5 PK	43.5	-9.0	3.00 H	197	51.6	-17.1
3	132.97	34.5 PK	43.5	-9.0	3.00 H	0	48.1	-13.6
4	166.28	36.0 PK	43.5	-7.5	2.00 H	338	49.0	-13.0
5	199.51	31.1 PK	43.5	-12.4	1.00 H	360	46.9	-15.8
6	371.00	30.6 PK	46.0	-15.4	3.00 H	0	40.8	-10.2
7	661.35	28.6 PK	46.0	-17.4	2.00 H	120	32.7	-4.1
8	932.61	32.4 PK	46.0	-13.6	2.00 H	149	31.9	0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

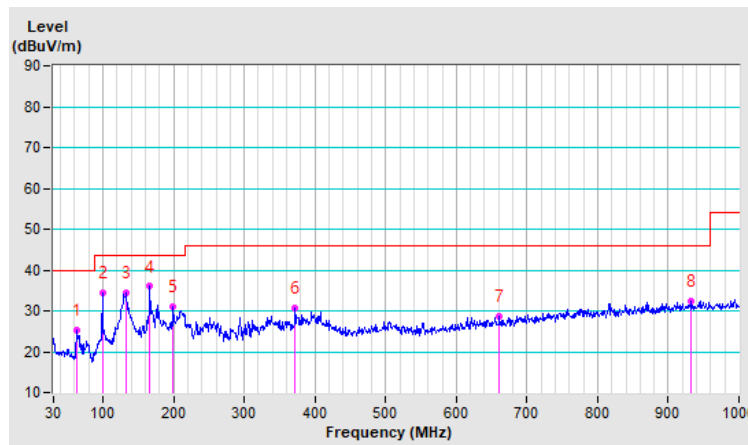


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	30.5 PK	40.0	-9.5	1.00 V	62	44.1	-13.6
2	80.39	28.8 PK	40.0	-11.2	1.00 V	148	46.6	-17.8
3	131.83	27.4 PK	43.5	-16.1	1.00 V	317	41.1	-13.7
4	157.53	26.9 PK	43.5	-16.6	1.00 V	190	39.5	-12.6
5	232.61	26.0 PK	46.0	-20.0	1.00 V	2	40.7	-14.7
6	299.10	28.1 PK	46.0	-17.9	1.00 V	360	40.0	-11.9
7	644.33	30.5 PK	46.0	-15.5	2.00 V	242	34.5	-4.0
8	954.43	32.7 PK	46.0	-13.3	1.00 V	360	32.1	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

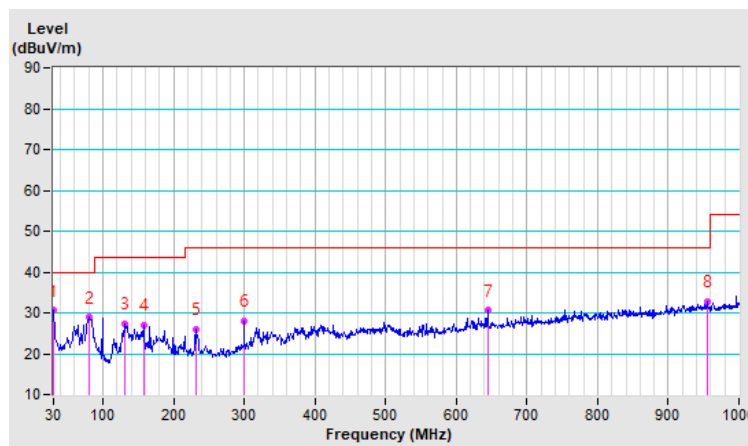

Mode B


1Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	63.47	27.5 PK	40.0	-12.5	3.00 H	61	41.5	-14.0
2	132.87	33.5 PK	43.5	-10.0	2.00 H	360	47.1	-13.6
3	165.99	34.9 PK	43.5	-8.6	2.00 H	360	47.9	-13.0
4	209.35	32.0 PK	43.5	-11.5	2.00 H	360	47.9	-15.9
5	246.09	30.0 PK	46.0	-16.0	1.00 H	71	43.9	-13.9
6	372.53	31.0 PK	46.0	-15.0	1.00 H	120	41.1	-10.1
7	741.76	31.0 PK	46.0	-15.0	1.00 H	163	33.7	-2.7
8	895.24	32.4 PK	46.0	-13.6	3.00 H	360	32.9	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

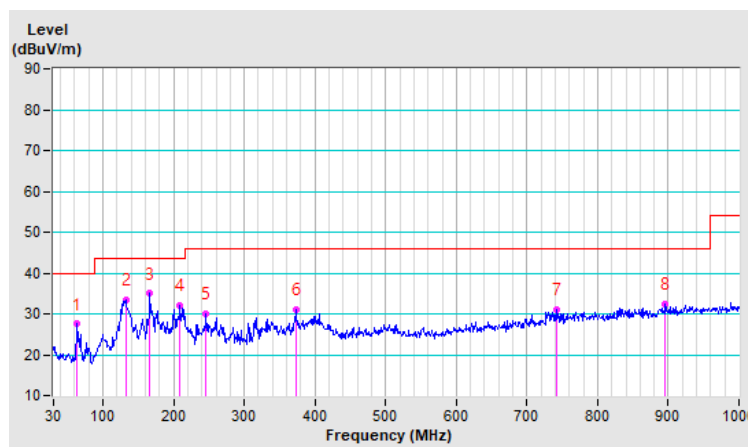


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.10	26.6 PK	40.0	-13.4	1.00 V	226	40.2	-13.6
2	82.04	28.8 PK	40.0	-11.2	1.00 V	79	46.9	-18.1
3	132.99	27.0 PK	43.5	-16.5	1.00 V	307	40.6	-13.6
4	298.86	29.0 PK	46.0	-17.0	2.00 V	0	40.9	-11.9
5	644.35	30.5 PK	46.0	-15.5	1.00 V	360	34.5	-4.0
6	976.67	32.3 PK	54.0	-21.7	2.00 V	236	31.6	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

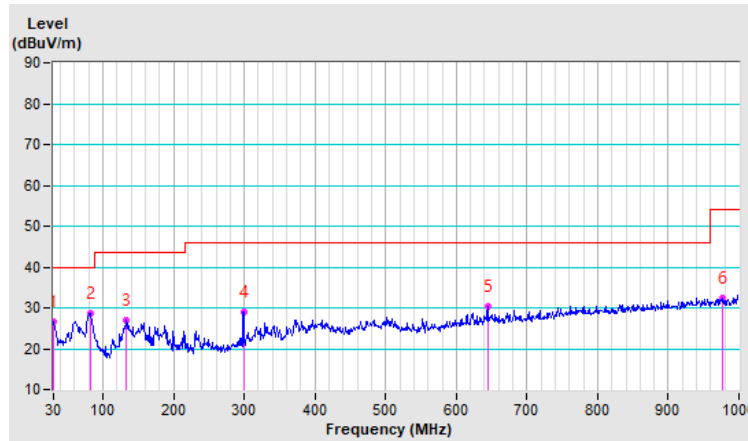


2Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.91	30.1 PK	40.0	-9.9	3.00 H	216	44.1	-14.0
2	133.01	34.6 PK	43.5	-8.9	3.00 H	1	48.1	-13.5
3	166.28	34.6 PK	43.5	-8.9	3.00 H	0	47.6	-13.0
4	374.54	30.1 PK	46.0	-15.9	1.00 H	110	40.2	-10.1
5	848.56	31.4 PK	46.0	-14.6	2.00 H	309	32.6	-1.2
6	921.67	32.8 PK	46.0	-13.2	2.00 H	167	32.6	0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

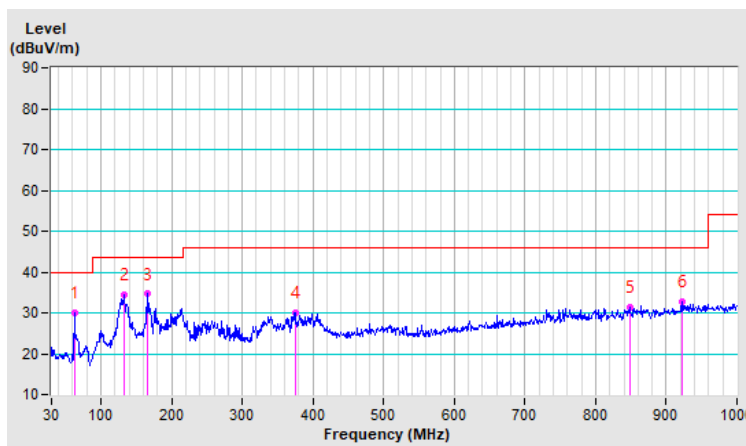


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.85	28.7 PK	40.0	-11.3	1.00 V	144	46.7	-18.0
2	157.51	27.9 PK	43.5	-15.6	1.00 V	122	40.5	-12.6
3	231.47	25.7 PK	46.0	-20.3	1.00 V	163	40.6	-14.9
4	398.92	28.0 PK	46.0	-18.0	2.00 V	66	37.4	-9.4
5	644.35	30.2 PK	46.0	-15.8	3.00 V	0	34.2	-4.0
6	958.94	33.1 PK	46.0	-12.9	1.00 V	58	32.5	0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

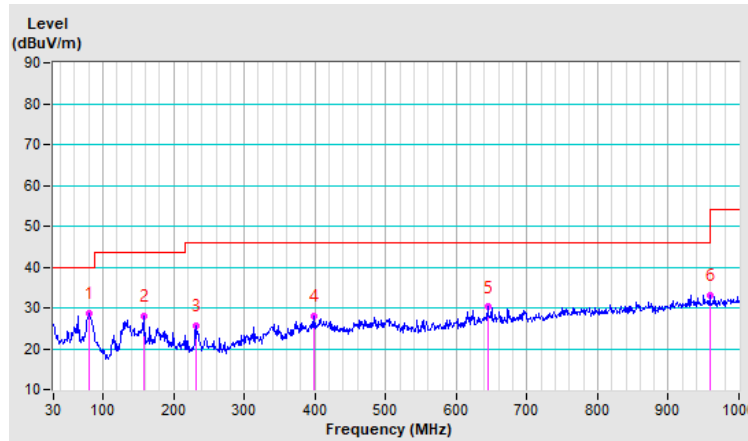

Mode C


1Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	65.14	24.3 PK	40.0	-15.7	3.00 H	64	38.9	-14.6
2	132.94	33.8 PK	43.5	-9.7	2.00 H	130	47.4	-13.6
3	166.26	35.4 PK	43.5	-8.1	2.00 H	0	48.4	-13.0
4	209.47	32.1 PK	43.5	-11.4	1.00 H	360	48.0	-15.9
5	299.08	31.9 PK	46.0	-14.1	1.00 H	247	43.8	-11.9
6	406.48	29.9 PK	46.0	-16.1	1.00 H	173	39.2	-9.3
7	764.82	31.6 PK	46.0	-14.4	1.00 H	119	33.7	-2.1
8	887.14	31.9 PK	46.0	-14.1	1.00 H	360	32.5	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

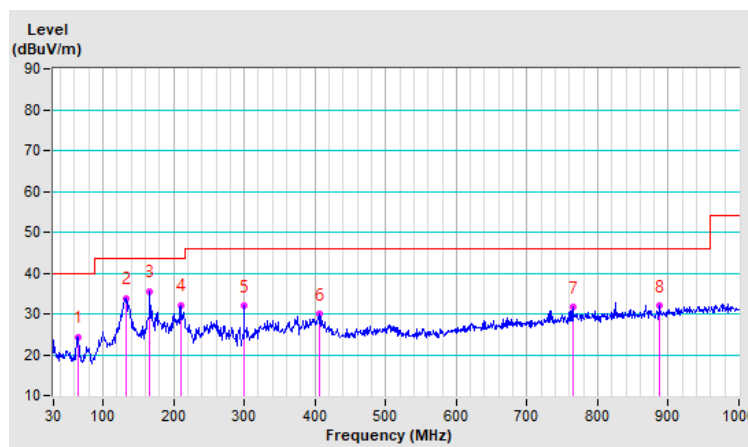


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	80.76	29.0 PK	40.0	-11.0	1.00 V	142	46.9	-17.9
2	133.01	26.3 PK	43.5	-17.2	2.00 V	118	39.8	-13.5
3	298.88	33.1 PK	46.0	-12.9	3.00 V	0	45.0	-11.9
4	382.89	27.8 PK	46.0	-18.2	2.00 V	184	37.6	-9.8
5	644.37	30.2 PK	46.0	-15.8	2.00 V	61	34.2	-4.0
6	935.71	34.2 PK	46.0	-11.8	1.00 V	66	33.7	0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

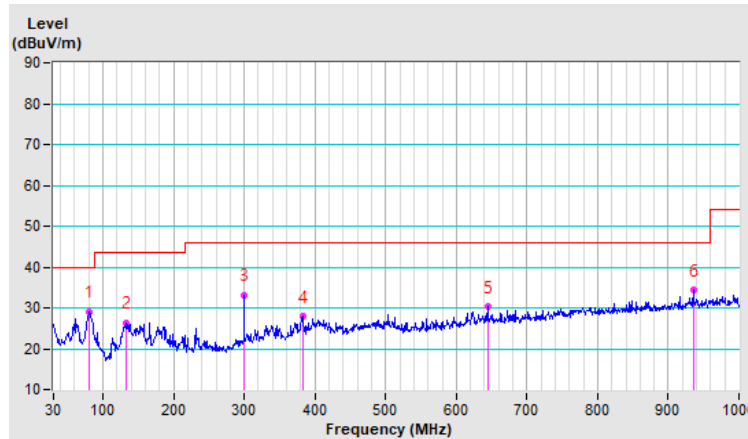


2Tx

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	153.58	35.2 PK	43.5	-8.3	2.00 H	0	47.7	-12.5
2	199.19	33.4 PK	43.5	-10.1	2.00 H	335	49.2	-15.8
3	298.98	31.2 PK	46.0	-14.8	4.00 H	2	43.1	-11.9
4	395.84	34.7 PK	46.0	-11.3	1.00 H	309	44.3	-9.6
5	936.25	32.9 PK	46.0	-13.1	3.00 H	179	32.4	0.5
6	989.09	32.7 PK	54.0	-21.3	1.00 H	360	31.9	0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

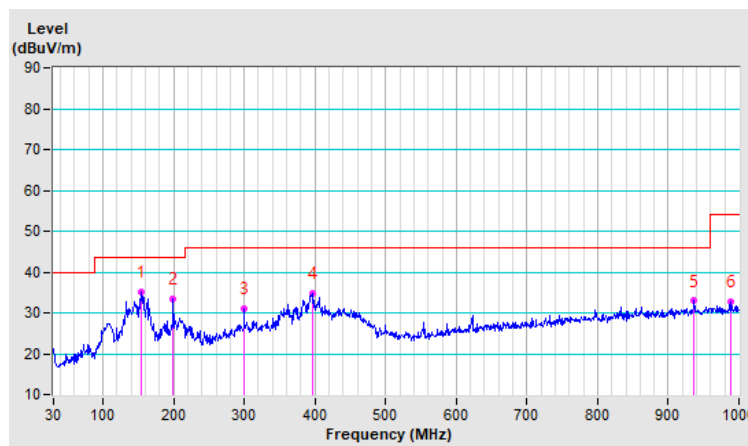


RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	PK: RB=120 kHz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21.6 °C, 71.1% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	79.74	28.9 PK	40.0	-11.1	1.00 V	131	46.5	-17.6
2	99.82	33.3 PK	43.5	-10.2	1.00 V	1	50.4	-17.1
3	156.29	28.5 PK	43.5	-15.0	2.00 V	258	41.1	-12.6
4	371.12	31.8 PK	46.0	-14.2	2.00 V	268	42.0	-10.2
5	644.35	31.2 PK	46.0	-14.8	1.00 V	238	35.2	-4.0
6	844.07	32.8 PK	46.0	-13.2	2.00 V	360	34.0	-1.2
7	987.22	32.4 PK	54.0	-21.6	1.00 V	261	31.7	0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

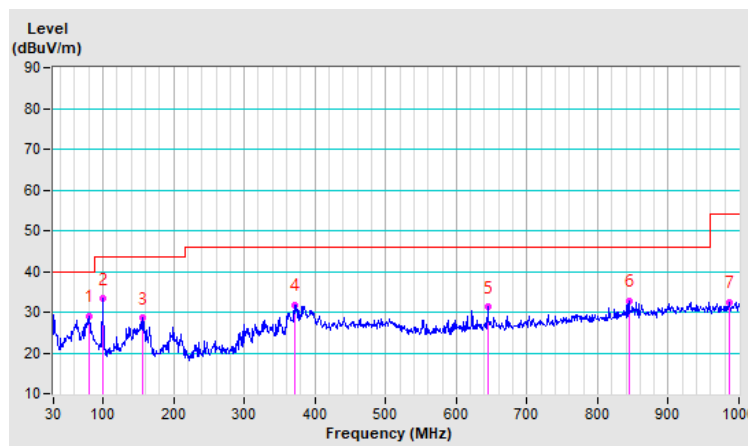

7.7 Unwanted Emissions above 1 GHz

Mode A

1Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.02 H	160	62.5	-2.0
2	2390.00	52.0 AV	54.0	-2.0	1.02 H	160	54.0	-2.0
3	*2412.00	110.3 PK			1.02 H	160	112.4	-2.1
4	*2412.00	108.3 AV			1.02 H	160	110.4	-2.1
5	4824.00	45.0 PK	74.0	-29.0	1.41 H	169	42.9	2.1
6	4824.00	40.1 AV	54.0	-13.9	1.41 H	169	38.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.89 V	200	60.6	-2.0
2	2390.00	50.9 AV	54.0	-3.1	1.89 V	200	52.9	-2.0
3	*2412.00	109.9 PK			1.89 V	200	112.0	-2.1
4	*2412.00	107.8 AV			1.89 V	200	109.9	-2.1
5	4824.00	51.0 PK	74.0	-23.0	3.77 V	153	48.9	2.1
6	4824.00	49.2 AV	54.0	-4.8	3.77 V	153	47.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.00 H	155	60.9	-2.0
2	2390.00	50.7 AV	54.0	-3.3	1.00 H	155	52.7	-2.0
3	*2417.00	111.1 PK			1.00 H	155	113.2	-2.1
4	*2417.00	108.9 AV			1.00 H	155	111.0	-2.1
5	4834.00	45.2 PK	74.0	-28.8	1.38 H	172	43.1	2.1
6	4834.00	40.5 AV	54.0	-13.5	1.38 H	172	38.4	2.1
7	7251.00	48.8 PK	74.0	-25.2	3.10 H	99	41.2	7.6
8	7251.00	42.0 AV	54.0	-12.0	3.10 H	99	34.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.88 V	197	60.4	-2.0
2	2390.00	51.0 AV	54.0	-3.0	1.88 V	197	53.0	-2.0
3	*2417.00	110.3 PK			1.88 V	197	112.4	-2.1
4	*2417.00	108.2 AV			1.88 V	197	110.3	-2.1
5	4834.00	51.0 PK	74.0	-23.0	3.79 V	148	48.9	2.1
6	4834.00	49.3 AV	54.0	-4.7	3.79 V	148	47.2	2.1
7	7251.00	50.3 PK	74.0	-23.7	2.97 V	168	42.7	7.6
8	7251.00	45.2 AV	54.0	-8.8	2.97 V	168	37.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.01 H	151	58.6	-2.0
2	2390.00	45.5 AV	54.0	-8.5	1.01 H	151	47.5	-2.0
3	*2437.00	110.7 PK			1.01 H	151	112.8	-2.1
4	*2437.00	108.6 AV			1.01 H	151	110.7	-2.1
5	2483.50	57.3 PK	74.0	-16.7	1.01 H	151	59.7	-2.4
6	2483.50	45.8 AV	54.0	-8.2	1.01 H	151	48.2	-2.4
7	4874.00	45.3 PK	74.0	-28.7	1.40 H	167	42.9	2.4
8	4874.00	40.7 AV	54.0	-13.3	1.40 H	167	38.3	2.4
9	7311.00	48.6 PK	74.0	-25.4	3.12 H	112	41.2	7.4
10	7311.00	42.2 AV	54.0	-11.8	3.12 H	112	34.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	2.06 V	195	58.3	-2.0
2	2390.00	44.8 AV	54.0	-9.2	2.06 V	195	46.8	-2.0
3	*2437.00	110.8 PK			2.06 V	195	112.9	-2.1
4	*2437.00	108.5 AV			2.06 V	195	110.6	-2.1
5	2483.50	57.5 PK	74.0	-16.5	2.06 V	195	59.9	-2.4
6	2483.50	46.3 AV	54.0	-7.7	2.06 V	195	48.7	-2.4
7	4874.00	51.3 PK	74.0	-22.7	3.81 V	154	48.9	2.4
8	4874.00	49.5 AV	54.0	-4.5	3.81 V	154	47.1	2.4
9	7311.00	50.5 PK	74.0	-23.5	2.98 V	183	43.1	7.4
10	7311.00	45.4 AV	54.0	-8.6	2.98 V	183	38.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	109.9 PK			1.06 H	168	112.3	-2.4
2	*2457.00	108.4 AV			1.06 H	168	110.8	-2.4
3	2483.50	59.5 PK	74.0	-14.5	1.06 H	168	61.9	-2.4
4	2483.50	51.0 AV	54.0	-3.0	1.06 H	168	53.4	-2.4
5	4914.00	44.7 PK	74.0	-29.3	1.37 H	160	42.2	2.5
6	4914.00	40.2 AV	54.0	-13.8	1.37 H	160	37.7	2.5
7	7371.00	48.7 PK	74.0	-25.3	3.12 H	117	41.1	7.6
8	7371.00	42.3 AV	54.0	-11.7	3.12 H	117	34.7	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	109.9 PK			3.84 V	209	112.3	-2.4
2	*2457.00	107.7 AV			3.84 V	209	110.1	-2.4
3	2483.50	57.6 PK	74.0	-16.4	2.48 V	185	60.0	-2.4
4	2483.50	47.1 AV	54.0	-6.9	2.48 V	185	49.5	-2.4
5	4914.00	51.0 PK	74.0	-23.0	3.79 V	137	48.5	2.5
6	4914.00	49.1 AV	54.0	-4.9	3.79 V	137	46.6	2.5
7	7371.00	49.9 PK	74.0	-24.1	2.93 V	166	42.3	7.6
8	7371.00	45.1 AV	54.0	-8.9	2.93 V	166	37.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.6 PK			1.21 H	154	113.0	-2.4
2	*2462.00	108.5 AV			1.21 H	154	110.9	-2.4
3	2483.50	59.7 PK	74.0	-14.3	1.21 H	154	62.1	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.21 H	154	54.7	-2.4
5	4924.00	44.1 PK	74.0	-29.9	1.37 H	171	41.6	2.5
6	4924.00	39.8 AV	54.0	-14.2	1.37 H	171	37.3	2.5
7	7386.00	48.3 PK	74.0	-25.7	3.09 H	131	40.6	7.7
8	7386.00	41.9 AV	54.0	-12.1	3.09 H	131	34.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.7 PK			2.00 V	195	113.1	-2.4
2	*2462.00	108.0 AV			2.00 V	195	110.4	-2.4
3	2483.50	61.2 PK	74.0	-12.8	2.00 V	195	63.6	-2.4
4	2483.50	51.3 AV	54.0	-2.7	2.00 V	195	53.7	-2.4
5	4924.00	50.4 PK	74.0	-23.6	3.85 V	125	47.9	2.5
6	4924.00	48.7 AV	54.0	-5.3	3.85 V	125	46.2	2.5
7	7386.00	49.8 PK	74.0	-24.2	2.92 V	175	42.1	7.7
8	7386.00	44.8 AV	54.0	-9.2	2.92 V	175	37.1	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.5 PK			1.18 H	164	111.9	-2.4
2	*2467.00	107.4 AV			1.18 H	164	109.8	-2.4
3	2483.50	60.9 PK	74.0	-13.1	1.18 H	164	63.3	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.18 H	164	54.7	-2.4
5	4934.00	43.8 PK	74.0	-30.2	1.33 H	169	41.4	2.4
6	4934.00	39.6 AV	54.0	-14.4	1.33 H	169	37.2	2.4
7	7401.00	47.9 PK	74.0	-26.1	3.12 H	126	40.0	7.9
8	7401.00	41.5 AV	54.0	-12.5	3.12 H	126	33.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.1 PK			2.00 V	196	111.5	-2.4
2	*2467.00	106.9 AV			2.00 V	196	109.3	-2.4
3	2483.50	61.6 PK	74.0	-12.4	2.00 V	196	64.0	-2.4
4	2483.50	51.3 AV	54.0	-2.7	2.00 V	196	53.7	-2.4
5	4934.00	50.5 PK	74.0	-23.5	3.89 V	127	48.1	2.4
6	4934.00	48.6 AV	54.0	-5.4	3.89 V	127	46.2	2.4
7	7401.00	49.3 PK	74.0	-24.7	2.94 V	182	41.4	7.9
8	7401.00	44.3 AV	54.0	-9.7	2.94 V	182	36.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.5 PK			1.14 H	163	107.9	-2.4
2	*2472.00	103.3 AV			1.14 H	163	105.7	-2.4
3	2483.50	60.2 PK	74.0	-13.8	1.14 H	163	62.6	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.14 H	163	54.2	-2.4
5	4944.00	43.7 PK	74.0	-30.3	1.30 H	173	41.3	2.4
6	4944.00	39.5 AV	54.0	-14.5	1.30 H	173	37.1	2.4
7	7416.00	48.0 PK	74.0	-26.0	3.14 H	128	40.0	8.0
8	7416.00	41.3 AV	54.0	-12.7	3.14 H	128	33.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.0 PK			2.00 V	194	106.4	-2.4
2	*2472.00	101.9 AV			2.00 V	194	104.3	-2.4
3	2483.50	60.7 PK	74.0	-13.3	2.00 V	194	63.1	-2.4
4	2483.50	50.8 AV	54.0	-3.2	2.00 V	194	53.2	-2.4
5	4944.00	50.4 PK	74.0	-23.6	3.89 V	112	48.0	2.4
6	4944.00	48.4 AV	54.0	-5.6	3.89 V	112	46.0	2.4
7	7416.00	49.2 PK	74.0	-24.8	2.97 V	178	41.2	8.0
8	7416.00	44.1 AV	54.0	-9.9	2.97 V	178	36.1	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.2 PK	74.0	-8.8	1.01 H	162	67.2	-2.0
2	2390.00	51.4 AV	54.0	-2.6	1.01 H	162	53.4	-2.0
3	*2412.00	110.7 PK			1.01 H	162	112.8	-2.1
4	*2412.00	101.5 AV			1.01 H	162	103.6	-2.1
5	4824.00	40.7 PK	74.0	-33.3	1.57 H	182	38.6	2.1
6	4824.00	29.1 AV	54.0	-24.9	1.57 H	182	27.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.89 V	197	63.2	-2.0
2	2390.00	47.7 AV	54.0	-6.3	1.89 V	197	49.7	-2.0
3	*2412.00	109.3 PK			1.89 V	197	111.4	-2.1
4	*2412.00	100.4 AV			1.89 V	197	102.5	-2.1
5	4824.00	46.1 PK	74.0	-27.9	3.85 V	150	44.0	2.1
6	4824.00	36.2 AV	54.0	-17.8	3.85 V	150	34.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.03 H	158	70.2	-2.0
2	2390.00	52.5 AV	54.0	-1.5	1.03 H	158	54.5	-2.0
3	*2417.00	110.4 PK			1.03 H	158	112.5	-2.1
4	*2417.00	102.6 AV			1.03 H	158	104.7	-2.1
5	4834.00	40.9 PK	74.0	-33.1	1.51 H	168	38.8	2.1
6	4834.00	29.2 AV	54.0	-24.8	1.51 H	168	27.1	2.1
7	7251.00	51.9 PK	74.0	-22.1	3.14 H	166	44.3	7.6
8	7251.00	39.7 AV	54.0	-14.3	3.14 H	166	32.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	1.86 V	196	69.0	-2.0
2	2390.00	49.1 AV	54.0	-4.9	1.86 V	196	51.1	-2.0
3	*2417.00	109.5 PK			1.86 V	196	111.6	-2.1
4	*2417.00	101.0 AV			1.86 V	196	103.1	-2.1
5	4834.00	46.7 PK	74.0	-27.3	3.83 V	140	44.6	2.1
6	4834.00	36.6 AV	54.0	-17.4	3.83 V	140	34.5	2.1
7	7251.00	53.3 PK	74.0	-20.7	3.03 V	195	45.7	7.6
8	7251.00	44.0 AV	54.0	-10.0	3.03 V	195	36.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.21 H	161	68.7	-2.0
2	2390.00	48.5 AV	54.0	-5.5	1.21 H	161	50.5	-2.0
3	*2437.00	115.8 PK			1.21 H	161	117.9	-2.1
4	*2437.00	105.7 AV			1.21 H	161	107.8	-2.1
5	2483.50	66.6 PK	74.0	-7.4	1.21 H	161	69.0	-2.4
6	2483.50	46.9 AV	54.0	-7.1	1.21 H	161	49.3	-2.4
7	4874.00	41.3 PK	74.0	-32.7	1.56 H	165	38.9	2.4
8	4874.00	29.7 AV	54.0	-24.3	1.56 H	165	27.3	2.4
9	7311.00	52.3 PK	74.0	-21.7	3.12 H	160	44.9	7.4
10	7311.00	40.2 AV	54.0	-13.8	3.12 H	160	32.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	2.14 V	192	62.4	-2.0
2	2390.00	46.7 AV	54.0	-7.3	2.14 V	192	48.7	-2.0
3	*2437.00	111.9 PK			2.14 V	192	114.0	-2.1
4	*2437.00	102.9 AV			2.14 V	192	105.0	-2.1
5	2483.50	62.3 PK	74.0	-11.7	2.14 V	192	64.7	-2.4
6	2483.50	45.7 AV	54.0	-8.3	2.14 V	192	48.1	-2.4
7	4874.00	47.0 PK	74.0	-27.0	3.79 V	142	44.6	2.4
8	4874.00	37.1 AV	54.0	-16.9	3.79 V	142	34.7	2.4
9	7311.00	53.2 PK	74.0	-20.8	2.99 V	181	45.8	7.4
10	7311.00	44.3 AV	54.0	-9.7	2.99 V	181	36.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.3 PK			1.23 H	334	114.7	-2.4
2	*2457.00	102.7 AV			1.23 H	334	105.1	-2.4
3	2483.50	67.5 PK	74.0	-6.5	1.23 H	334	69.9	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.23 H	334	54.4	-2.4
5	4914.00	40.7 PK	74.0	-33.3	1.51 H	154	38.2	2.5
6	4914.00	28.7 AV	54.0	-25.3	1.51 H	154	26.2	2.5
7	7371.00	51.6 PK	74.0	-22.4	3.13 H	172	44.0	7.6
8	7371.00	39.4 AV	54.0	-14.6	3.13 H	172	31.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	110.0 PK			2.06 V	195	112.4	-2.4
2	*2457.00	101.6 AV			2.06 V	195	104.0	-2.4
3	2483.50	67.9 PK	74.0	-6.1	2.06 V	195	70.3	-2.4
4	2483.50	51.8 AV	54.0	-2.2	2.06 V	195	54.2	-2.4
5	4914.00	46.8 PK	74.0	-27.2	3.78 V	143	44.3	2.5
6	4914.00	36.4 AV	54.0	-17.6	3.78 V	143	33.9	2.5
7	7371.00	52.8 PK	74.0	-21.2	3.05 V	186	45.2	7.6
8	7371.00	43.6 AV	54.0	-10.4	3.05 V	186	36.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.8 PK			1.73 H	334	114.2	-2.4
2	*2462.00	102.0 AV			1.73 H	334	104.4	-2.4
3	2483.50	67.3 PK	74.0	-6.7	1.73 H	334	69.7	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.73 H	334	54.3	-2.4
5	4924.00	40.4 PK	74.0	-33.6	1.45 H	157	37.9	2.5
6	4924.00	28.3 AV	54.0	-25.7	1.45 H	157	25.8	2.5
7	7386.00	51.1 PK	74.0	-22.9	3.14 H	160	43.4	7.7
8	7386.00	39.1 AV	54.0	-14.9	3.14 H	160	31.4	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.6 PK			2.00 V	195	113.0	-2.4
2	*2462.00	101.6 AV			2.00 V	195	104.0	-2.4
3	2483.50	68.0 PK	74.0	-6.0	2.00 V	195	70.4	-2.4
4	2483.50	51.6 AV	54.0	-2.4	2.00 V	195	54.0	-2.4
5	4924.00	46.3 PK	74.0	-27.7	3.75 V	133	43.8	2.5
6	4924.00	36.2 AV	54.0	-17.8	3.75 V	133	33.7	2.5
7	7386.00	52.4 PK	74.0	-21.6	3.02 V	175	44.7	7.7
8	7386.00	43.3 AV	54.0	-10.7	3.02 V	175	35.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.0 PK			1.22 H	164	113.4	-2.4
2	*2467.00	101.6 AV			1.22 H	164	104.0	-2.4
3	2483.50	65.8 PK	74.0	-8.2	1.22 H	164	68.2	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.22 H	164	54.8	-2.4
5	4934.00	40.4 PK	74.0	-33.6	1.46 H	146	38.0	2.4
6	4934.00	28.2 AV	54.0	-25.8	1.46 H	146	25.8	2.4
7	7401.00	50.7 PK	74.0	-23.3	3.16 H	157	42.8	7.9
8	7401.00	38.9 AV	54.0	-15.1	3.16 H	157	31.0	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.8 PK			2.01 V	195	111.2	-2.4
2	*2467.00	100.0 AV			2.01 V	195	102.4	-2.4
3	2483.50	67.0 PK	74.0	-7.0	2.01 V	195	69.4	-2.4
4	2483.50	51.7 AV	54.0	-2.3	2.01 V	195	54.1	-2.4
5	4934.00	45.9 PK	74.0	-28.1	3.74 V	134	43.5	2.4
6	4934.00	36.1 AV	54.0	-17.9	3.74 V	134	33.7	2.4
7	7401.00	52.7 PK	74.0	-21.3	2.98 V	170	44.8	7.9
8	7401.00	43.0 AV	54.0	-11.0	2.98 V	170	35.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.7 PK			1.14 H	173	111.1	-2.4
2	*2472.00	99.2 AV			1.14 H	173	101.6	-2.4
3	2483.50	72.3 PK	74.0	-1.7	1.14 H	173	74.7	-2.4
4	2483.50	51.1 AV	54.0	-2.9	1.14 H	173	53.5	-2.4
5	4944.00	39.9 PK	74.0	-34.1	1.48 H	136	37.5	2.4
6	4944.00	27.9 AV	54.0	-26.1	1.48 H	136	25.5	2.4
7	7416.00	50.6 PK	74.0	-23.4	3.13 H	166	42.6	8.0
8	7416.00	38.5 AV	54.0	-15.5	3.13 H	166	30.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.3 PK			2.00 V	197	108.7	-2.4
2	*2472.00	97.4 AV			2.00 V	197	99.8	-2.4
3	2483.50	61.5 PK	74.0	-12.5	2.00 V	197	63.9	-2.4
4	2483.50	48.1 AV	54.0	-5.9	2.00 V	197	50.5	-2.4
5	4944.00	45.3 PK	74.0	-28.7	3.80 V	131	42.9	2.4
6	4944.00	35.7 AV	54.0	-18.3	3.80 V	131	33.3	2.4
7	7416.00	52.7 PK	74.0	-21.3	3.03 V	156	44.7	8.0
8	7416.00	42.5 AV	54.0	-11.5	3.03 V	156	34.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.02 H	170	68.8	-2.0
2	2390.00	52.0 AV	54.0	-2.0	1.02 H	170	54.0	-2.0
3	*2412.00	114.1 PK			1.02 H	170	116.2	-2.1
4	*2412.00	101.7 AV			1.02 H	170	103.8	-2.1
5	4824.00	39.8 PK	74.0	-34.2	1.65 H	159	37.7	2.1
6	4824.00	32.0 AV	54.0	-22.0	1.65 H	159	29.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.0 PK	74.0	-11.0	1.88 V	197	65.0	-2.0
2	2390.00	49.2 AV	54.0	-4.8	1.88 V	197	51.2	-2.0
3	*2412.00	111.7 PK			1.88 V	197	113.8	-2.1
4	*2412.00	100.1 AV			1.88 V	197	102.2	-2.1
5	4824.00	43.0 PK	74.0	-31.0	3.76 V	184	40.9	2.1
6	4824.00	34.3 AV	54.0	-19.7	3.76 V	184	32.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.01 H	161	68.9	-2.0
2	2390.00	51.9 AV	54.0	-2.1	1.01 H	161	53.9	-2.0
3	*2417.00	115.1 PK			1.01 H	161	117.2	-2.1
4	*2417.00	102.5 AV			1.01 H	161	104.6	-2.1
5	4834.00	40.1 PK	74.0	-33.9	1.61 H	146	38.0	2.1
6	4834.00	32.1 AV	54.0	-21.9	1.61 H	146	30.0	2.1
7	7251.00	49.4 PK	74.0	-24.6	1.86 H	108	41.8	7.6
8	7251.00	37.4 AV	54.0	-16.6	1.86 H	108	29.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	1.87 V	198	67.3	-2.0
2	2390.00	50.5 AV	54.0	-3.5	1.87 V	198	52.5	-2.0
3	*2417.00	111.4 PK			1.87 V	198	113.5	-2.1
4	*2417.00	100.2 AV			1.87 V	198	102.3	-2.1
5	4834.00	43.1 PK	74.0	-30.9	3.71 V	173	41.0	2.1
6	4834.00	34.6 AV	54.0	-19.4	3.71 V	173	32.5	2.1
7	7251.00	51.0 PK	74.0	-23.0	2.83 V	172	43.4	7.6
8	7251.00	39.2 AV	54.0	-14.8	2.83 V	172	31.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	1.51 H	334	67.8	-2.0
2	2390.00	48.7 AV	54.0	-5.3	1.51 H	334	50.7	-2.0
3	*2437.00	116.8 PK			1.51 H	334	118.9	-2.1
4	*2437.00	104.2 AV			1.51 H	334	106.3	-2.1
5	2483.50	67.6 PK	74.0	-6.4	1.51 H	334	70.0	-2.4
6	2483.50	48.6 AV	54.0	-5.4	1.51 H	334	51.0	-2.4
7	4874.00	40.4 PK	74.0	-33.6	1.60 H	143	38.0	2.4
8	4874.00	32.5 AV	54.0	-21.5	1.60 H	143	30.1	2.4
9	7311.00	50.1 PK	74.0	-23.9	1.92 H	113	42.7	7.4
10	7311.00	37.8 AV	54.0	-16.2	1.92 H	113	30.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	1.95 V	156	66.2	-2.0
2	2390.00	50.1 AV	54.0	-3.9	1.95 V	156	52.1	-2.0
3	*2437.00	113.4 PK			1.95 V	156	115.5	-2.1
4	*2437.00	102.7 AV			1.95 V	156	104.8	-2.1
5	2483.50	70.2 PK	74.0	-3.8	1.95 V	156	72.6	-2.4
6	2483.50	50.8 AV	54.0	-3.2	1.95 V	156	53.2	-2.4
7	4874.00	43.4 PK	74.0	-30.6	3.69 V	182	41.0	2.4
8	4874.00	34.8 AV	54.0	-19.2	3.69 V	182	32.4	2.4
9	7311.00	51.3 PK	74.0	-22.7	2.81 V	158	43.9	7.4
10	7311.00	39.4 AV	54.0	-14.6	2.81 V	158	32.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.5 PK			1.21 H	335	114.9	-2.4
2	*2457.00	101.9 AV			1.21 H	335	104.3	-2.4
3	2483.50	66.2 PK	74.0	-7.8	1.21 H	335	68.6	-2.4
4	2483.50	51.3 AV	54.0	-2.7	1.21 H	335	53.7	-2.4
5	4914.00	40.3 PK	74.0	-33.7	1.57 H	145	37.8	2.5
6	4914.00	32.3 AV	54.0	-21.7	1.57 H	145	29.8	2.5
7	7371.00	49.8 PK	74.0	-24.2	1.98 H	103	42.2	7.6
8	7371.00	37.6 AV	54.0	-16.4	1.98 H	103	30.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.2 PK			1.87 V	156	114.6	-2.4
2	*2457.00	100.2 AV			1.87 V	156	102.6	-2.4
3	2483.50	66.5 PK	74.0	-7.5	1.87 V	156	68.9	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.87 V	156	54.4	-2.4
5	4914.00	43.4 PK	74.0	-30.6	3.65 V	188	40.9	2.5
6	4914.00	34.5 AV	54.0	-19.5	3.65 V	188	32.0	2.5
7	7371.00	50.8 PK	74.0	-23.2	2.81 V	166	43.2	7.6
8	7371.00	39.1 AV	54.0	-14.9	2.81 V	166	31.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.0 PK			1.73 H	335	114.4	-2.4
2	*2462.00	101.1 AV			1.73 H	335	103.5	-2.4
3	2483.50	66.1 PK	74.0	-7.9	1.73 H	335	68.5	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.73 H	335	54.2	-2.4
5	4924.00	40.2 PK	74.0	-33.8	1.52 H	139	37.7	2.5
6	4924.00	32.2 AV	54.0	-21.8	1.52 H	139	29.7	2.5
7	7386.00	49.3 PK	74.0	-24.7	2.04 H	91	41.6	7.7
8	7386.00	37.2 AV	54.0	-16.8	2.04 H	91	29.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.0 PK			1.86 V	173	113.4	-2.4
2	*2462.00	99.5 AV			1.86 V	173	101.9	-2.4
3	2483.50	65.3 PK	74.0	-8.7	1.86 V	173	67.7	-2.4
4	2483.50	51.3 AV	54.0	-2.7	1.86 V	173	53.7	-2.4
5	4924.00	43.0 PK	74.0	-31.0	3.65 V	174	40.5	2.5
6	4924.00	34.4 AV	54.0	-19.6	3.65 V	174	31.9	2.5
7	7386.00	50.4 PK	74.0	-23.6	2.86 V	166	42.7	7.7
8	7386.00	38.6 AV	54.0	-15.4	2.86 V	166	30.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.0 PK			1.50 H	333	112.4	-2.4
2	*2467.00	99.3 AV			1.50 H	333	101.7	-2.4
3	2483.50	65.8 PK	74.0	-8.2	1.50 H	333	68.2	-2.4
4	2483.50	50.7 AV	54.0	-3.3	1.50 H	333	53.1	-2.4
5	4934.00	40.3 PK	74.0	-33.7	1.46 H	137	37.9	2.4
6	4934.00	32.0 AV	54.0	-22.0	1.46 H	137	29.6	2.4
7	7401.00	49.0 PK	74.0	-25.0	2.04 H	104	41.1	7.9
8	7401.00	37.1 AV	54.0	-16.9	2.04 H	104	29.2	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.5 PK			1.88 V	157	111.9	-2.4
2	*2467.00	98.1 AV			1.88 V	157	100.5	-2.4
3	2483.50	63.3 PK	74.0	-10.7	1.88 V	157	65.7	-2.4
4	2483.50	50.0 AV	54.0	-4.0	1.88 V	157	52.4	-2.4
5	4934.00	42.6 PK	74.0	-31.4	3.66 V	161	40.2	2.4
6	4934.00	34.2 AV	54.0	-19.8	3.66 V	161	31.8	2.4
7	7401.00	50.6 PK	74.0	-23.4	2.82 V	157	42.7	7.9
8	7401.00	38.4 AV	54.0	-15.6	2.82 V	157	30.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.1 PK			1.00 H	174	111.5	-2.4
2	*2472.00	97.2 AV			1.00 H	174	99.6	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.00 H	174	74.6	-2.4
4	2483.50	50.2 AV	54.0	-3.8	1.00 H	174	52.6	-2.4
5	4944.00	39.8 PK	74.0	-34.2	1.52 H	126	37.4	2.4
6	4944.00	31.6 AV	54.0	-22.4	1.52 H	126	29.2	2.4
7	7416.00	49.0 PK	74.0	-25.0	2.02 H	101	41.0	8.0
8	7416.00	37.1 AV	54.0	-16.9	2.02 H	101	29.1	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.3 PK			1.98 V	155	112.7	-2.4
2	*2472.00	98.5 AV			1.98 V	155	100.9	-2.4
3	2483.50	68.1 PK	74.0	-5.9	1.98 V	155	70.5	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.98 V	155	54.7	-2.4
5	4944.00	42.5 PK	74.0	-31.5	3.65 V	160	40.1	2.4
6	4944.00	34.1 AV	54.0	-19.9	3.65 V	160	31.7	2.4
7	7416.00	50.0 PK	74.0	-24.0	2.77 V	154	42.0	8.0
8	7416.00	38.0 AV	54.0	-16.0	2.77 V	154	30.0	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.01 H	162	68.5	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.01 H	162	54.4	-2.0
3	*2422.00	109.8 PK			1.01 H	162	111.9	-2.1
4	*2422.00	98.1 AV			1.01 H	162	100.2	-2.1
5	4844.00	39.3 PK	74.0	-34.7	1.21 H	253	37.1	2.2
6	4844.00	28.2 AV	54.0	-25.8	1.21 H	253	26.0	2.2
7	7266.00	44.7 PK	74.0	-29.3	2.36 H	91	37.1	7.6
8	7266.00	32.7 AV	54.0	-21.3	2.36 H	91	25.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	2.12 V	191	66.2	-2.0
2	2390.00	49.5 AV	54.0	-4.5	2.12 V	191	51.5	-2.0
3	*2422.00	108.3 PK			2.12 V	191	110.4	-2.1
4	*2422.00	97.1 AV			2.12 V	191	99.2	-2.1
5	4844.00	41.3 PK	74.0	-32.7	3.28 V	169	39.1	2.2
6	4844.00	29.8 AV	54.0	-24.2	3.28 V	169	27.6	2.2
7	7266.00	47.0 PK	74.0	-27.0	2.34 V	146	39.4	7.6
8	7266.00	34.3 AV	54.0	-19.7	2.34 V	146	26.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.50 H	335	66.5	-2.0
2	2390.00	49.7 AV	54.0	-4.3	1.50 H	335	51.7	-2.0
3	*2437.00	109.9 PK			1.50 H	335	112.0	-2.1
4	*2437.00	99.3 AV			1.50 H	335	101.4	-2.1
5	2483.50	66.6 PK	74.0	-7.4	1.50 H	335	69.0	-2.4
6	2483.50	50.5 AV	54.0	-3.5	1.50 H	335	52.9	-2.4
7	4874.00	39.5 PK	74.0	-34.5	1.22 H	246	37.1	2.4
8	4874.00	28.3 AV	54.0	-25.7	1.22 H	246	25.9	2.4
9	7311.00	44.8 PK	74.0	-29.2	2.39 H	90	37.4	7.4
10	7311.00	33.0 AV	54.0	-21.0	2.39 H	90	25.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	2.14 V	190	66.9	-2.0
2	2390.00	52.2 AV	54.0	-1.8	2.14 V	190	54.2	-2.0
3	*2437.00	109.7 PK			2.14 V	190	111.8	-2.1
4	*2437.00	97.8 AV			2.14 V	190	99.9	-2.1
5	2483.50	66.5 PK	74.0	-7.5	2.14 V	190	68.9	-2.4
6	2483.50	52.4 AV	54.0	-1.6	2.14 V	190	54.8	-2.4
7	4874.00	42.1 PK	74.0	-31.9	3.30 V	185	39.7	2.4
8	4874.00	30.3 AV	54.0	-23.7	3.30 V	185	27.9	2.4
9	7311.00	47.3 PK	74.0	-26.7	2.38 V	139	39.9	7.4
10	7311.00	34.5 AV	54.0	-19.5	2.38 V	139	27.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.9 PK			1.21 H	163	111.1	-2.2
2	*2452.00	97.2 AV			1.21 H	163	99.4	-2.2
3	2483.50	65.7 PK	74.0	-8.3	1.21 H	163	68.1	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.21 H	163	54.7	-2.4
5	4904.00	38.8 PK	74.0	-35.2	1.27 H	268	36.3	2.5
6	4904.00	27.9 AV	54.0	-26.1	1.27 H	268	25.4	2.5
7	7356.00	44.8 PK	74.0	-29.2	2.33 H	86	37.3	7.5
8	7356.00	32.5 AV	54.0	-21.5	2.33 H	86	25.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.2 PK			1.94 V	154	109.4	-2.2
2	*2452.00	95.8 AV			1.94 V	154	98.0	-2.2
3	2483.50	64.4 PK	74.0	-9.6	1.94 V	154	66.8	-2.4
4	2483.50	48.5 AV	54.0	-5.5	1.94 V	154	50.9	-2.4
5	4904.00	41.3 PK	74.0	-32.7	3.24 V	155	38.8	2.5
6	4904.00	29.6 AV	54.0	-24.4	3.24 V	155	27.1	2.5
7	7356.00	47.0 PK	74.0	-27.0	2.39 V	158	39.5	7.5
8	7356.00	34.2 AV	54.0	-19.8	2.39 V	158	26.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.5 PK			1.49 H	334	109.9	-2.4
2	*2457.00	96.4 AV			1.49 H	334	98.8	-2.4
3	2483.50	64.3 PK	74.0	-9.7	1.49 H	334	66.7	-2.4
4	2483.50	52.2 AV	54.0	-1.8	1.49 H	334	54.6	-2.4
5	4914.00	38.6 PK	74.0	-35.4	1.25 H	274	36.1	2.5
6	4914.00	27.7 AV	54.0	-26.3	1.25 H	274	25.2	2.5
7	7371.00	44.5 PK	74.0	-29.5	2.33 H	73	36.9	7.6
8	7371.00	32.4 AV	54.0	-21.6	2.33 H	73	24.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.3 PK			1.95 V	152	109.7	-2.4
2	*2457.00	95.0 AV			1.95 V	152	97.4	-2.4
3	2483.50	67.9 PK	74.0	-6.1	1.95 V	152	70.3	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.95 V	152	54.8	-2.4
5	4914.00	41.0 PK	74.0	-33.0	3.23 V	156	38.5	2.5
6	4914.00	29.3 AV	54.0	-24.7	3.23 V	156	26.8	2.5
7	7371.00	46.7 PK	74.0	-27.3	2.39 V	167	39.1	7.6
8	7371.00	34.0 AV	54.0	-20.0	2.39 V	167	26.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.0 PK			1.71 H	335	109.4	-2.4
2	*2462.00	96.0 AV			1.71 H	335	98.4	-2.4
3	2483.50	66.6 PK	74.0	-7.4	1.71 H	335	69.0	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.71 H	335	54.4	-2.4
5	4924.00	38.0 PK	74.0	-36.0	1.25 H	264	35.5	2.5
6	4924.00	27.3 AV	54.0	-26.7	1.25 H	264	24.8	2.5
7	7386.00	44.6 PK	74.0	-29.4	2.35 H	93	36.9	7.7
8	7386.00	32.3 AV	54.0	-21.7	2.35 H	93	24.6	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.9 PK			1.93 V	154	109.3	-2.4
2	*2462.00	95.5 AV			1.93 V	154	97.9	-2.4
3	2483.50	70.7 PK	74.0	-3.3	1.93 V	154	73.1	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.93 V	154	54.8	-2.4
5	4924.00	40.9 PK	74.0	-33.1	3.28 V	165	38.4	2.5
6	4924.00	29.1 AV	54.0	-24.9	3.28 V	165	26.6	2.5
7	7386.00	46.3 PK	74.0	-27.7	2.34 V	167	38.6	7.7
8	7386.00	33.7 AV	54.0	-20.3	2.34 V	167	26.0	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2369.08	71.6 PK	74.0	-2.4	1.48 H	190	73.6	-2.0
2	2369.08	46.1 AV	54.0	-7.9	1.48 H	190	48.1	-2.0
3	2390.00	71.3 PK	74.0	-2.7	1.48 H	190	73.3	-2.0
4	2390.00	47.2 AV	54.0	-6.8	1.48 H	190	49.2	-2.0
5	*2412.00	118.7 PK			1.48 H	190	120.8	-2.1
6	*2412.00	108.7 AV			1.48 H	190	110.8	-2.1
7	4824.00	43.0 PK	74.0	-31.0	1.50 H	206	40.9	2.1
8	4824.00	32.4 AV	54.0	-21.6	1.50 H	206	30.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2369.08	71.8 PK	74.0	-2.2	3.26 V	202	73.8	-2.0
2	2369.08	44.8 AV	54.0	-9.2	3.26 V	202	46.8	-2.0
3	2390.00	70.9 PK	74.0	-3.1	3.26 V	202	72.9	-2.0
4	2390.00	48.5 AV	54.0	-5.5	3.26 V	202	50.5	-2.0
5	*2412.00	118.7 PK			3.26 V	202	120.8	-2.1
6	*2412.00	107.3 AV			3.26 V	202	109.4	-2.1
7	4824.00	49.6 PK	74.0	-24.4	3.37 V	145	47.5	2.1
8	4824.00	38.5 AV	54.0	-15.5	3.37 V	145	36.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.18	69.5 PK	74.0	-4.5	1.05 H	11	71.5	-2.0
2	2375.18	44.7 AV	54.0	-9.3	1.05 H	11	46.7	-2.0
3	2390.00	63.6 PK	74.0	-10.4	1.05 H	11	65.6	-2.0
4	2390.00	45.7 AV	54.0	-8.3	1.05 H	11	47.7	-2.0
5	*2417.00	120.0 PK			1.05 H	11	122.1	-2.1
6	*2417.00	108.4 AV			1.05 H	11	110.5	-2.1
7	4834.00	43.2 PK	74.0	-30.8	1.55 H	217	41.1	2.1
8	4834.00	32.5 AV	54.0	-21.5	1.55 H	217	30.4	2.1
9	7251.00	55.7 PK	74.0	-18.3	2.05 H	92	48.1	7.6
10	7251.00	40.0 AV	54.0	-14.0	2.05 H	92	32.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.18	67.7 PK	74.0	-6.3	2.89 V	199	69.7	-2.0
2	2375.18	45.6 AV	54.0	-8.4	2.89 V	199	47.6	-2.0
3	2390.00	65.2 PK	74.0	-8.8	2.89 V	199	67.2	-2.0
4	2390.00	46.2 AV	54.0	-7.8	2.89 V	199	48.2	-2.0
5	*2417.00	119.2 PK			2.89 V	199	121.3	-2.1
6	*2417.00	108.0 AV			2.89 V	199	110.1	-2.1
7	4834.00	49.9 PK	74.0	-24.1	3.37 V	159	47.8	2.1
8	4834.00	38.7 AV	54.0	-15.3	3.37 V	159	36.6	2.1
9	7251.00	57.2 PK	74.0	-16.8	2.22 V	131	49.6	7.6
10	7251.00	41.6 AV	54.0	-12.4	2.22 V	131	34.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.49 H	10	74.2	-2.0
2	2390.00	45.3 AV	54.0	-8.7	1.49 H	10	47.3	-2.0
3	*2437.00	120.9 PK			1.49 H	10	123.0	-2.1
4	*2437.00	110.1 AV			1.49 H	10	112.2	-2.1
5	2483.50	62.5 PK	74.0	-11.5	1.49 H	10	64.9	-2.4
6	2483.50	45.0 AV	54.0	-9.0	1.49 H	10	47.4	-2.4
7	4874.00	43.1 PK	74.0	-30.9	1.55 H	210	40.7	2.4
8	4874.00	32.7 AV	54.0	-21.3	1.55 H	210	30.3	2.4
9	7311.00	55.6 PK	74.0	-18.4	2.05 H	93	48.2	7.4
10	7311.00	40.1 AV	54.0	-13.9	2.05 H	93	32.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.4 PK	74.0	-7.6	2.80 V	195	68.4	-2.0
2	2390.00	45.9 AV	54.0	-8.1	2.80 V	195	47.9	-2.0
3	*2437.00	121.1 PK			2.80 V	195	123.2	-2.1
4	*2437.00	109.8 AV			2.80 V	195	111.9	-2.1
5	2483.50	61.3 PK	74.0	-12.7	2.80 V	195	63.7	-2.4
6	2483.50	45.1 AV	54.0	-8.9	2.80 V	195	47.5	-2.4
7	4874.00	50.2 PK	74.0	-23.8	3.39 V	149	47.8	2.4
8	4874.00	38.9 AV	54.0	-15.1	3.39 V	149	36.5	2.4
9	7311.00	57.3 PK	74.0	-16.7	2.24 V	144	49.9	7.4
10	7311.00	41.7 AV	54.0	-12.3	2.24 V	144	34.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	119.5 PK			1.00 H	11	121.9	-2.4
2	*2457.00	107.8 AV			1.00 H	11	110.2	-2.4
3	2483.50	65.3 PK	74.0	-8.7	1.00 H	11	67.7	-2.4
4	2483.50	45.7 AV	54.0	-8.3	1.00 H	11	48.1	-2.4
5	2498.15	65.5 PK	74.0	-8.5	1.00 H	11	67.9	-2.4
6	2498.15	45.2 AV	54.0	-8.8	1.00 H	11	47.6	-2.4
7	4914.00	42.5 PK	74.0	-31.5	1.56 H	224	40.0	2.5
8	4914.00	32.2 AV	54.0	-21.8	1.56 H	224	29.7	2.5
9	7371.00	55.2 PK	74.0	-18.8	1.99 H	91	47.6	7.6
10	7371.00	39.8 AV	54.0	-14.2	1.99 H	91	32.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	120.1 PK			2.97 V	179	122.5	-2.4
2	*2457.00	108.6 AV			2.97 V	179	111.0	-2.4
3	2483.50	66.4 PK	74.0	-7.6	2.97 V	179	68.8	-2.4
4	2483.50	46.1 AV	54.0	-7.9	2.97 V	179	48.5	-2.4
5	2498.15	67.0 PK	74.0	-7.0	2.97 V	179	69.4	-2.4
6	2498.15	45.4 AV	54.0	-8.6	2.97 V	179	47.8	-2.4
7	4914.00	49.5 PK	74.0	-24.5	3.40 V	148	47.0	2.5
8	4914.00	38.4 AV	54.0	-15.6	3.40 V	148	35.9	2.5
9	7371.00	57.1 PK	74.0	-16.9	2.27 V	120	49.5	7.6
10	7371.00	41.5 AV	54.0	-12.5	2.27 V	120	33.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.3 PK			1.41 H	11	122.7	-2.4
2	*2462.00	108.8 AV			1.41 H	11	111.2	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.41 H	11	74.6	-2.4
4	2483.50	46.7 AV	54.0	-7.3	1.41 H	11	49.1	-2.4
5	2495.89	67.9 PK	74.0	-6.1	1.41 H	11	70.3	-2.4
6	2495.89	45.1 AV	54.0	-8.9	1.41 H	11	47.5	-2.4
7	4924.00	42.0 PK	74.0	-32.0	1.58 H	212	39.5	2.5
8	4924.00	31.7 AV	54.0	-22.3	1.58 H	212	29.2	2.5
9	7386.00	55.0 PK	74.0	-19.0	2.11 H	104	47.3	7.7
10	7386.00	39.7 AV	54.0	-14.3	2.11 H	104	32.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.9 PK			2.61 V	143	121.3	-2.4
2	*2462.00	108.5 AV			2.61 V	143	110.9	-2.4
3	2483.50	69.5 PK	74.0	-4.5	2.61 V	143	71.9	-2.4
4	2483.50	46.6 AV	54.0	-7.4	2.61 V	143	49.0	-2.4
5	2495.89	58.7 PK	74.0	-15.3	2.61 V	143	61.1	-2.4
6	2495.89	45.2 AV	54.0	-8.8	2.61 V	143	47.6	-2.4
7	4924.00	49.8 PK	74.0	-24.2	3.34 V	162	47.3	2.5
8	4924.00	38.3 AV	54.0	-15.7	3.34 V	162	35.8	2.5
9	7386.00	57.2 PK	74.0	-16.8	2.28 V	120	49.5	7.7
10	7386.00	41.3 AV	54.0	-12.7	2.28 V	120	33.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.7 PK			1.42 H	10	122.1	-2.4
2	*2467.00	107.8 AV			1.42 H	10	110.2	-2.4
3	2483.50	67.9 PK	74.0	-6.1	1.42 H	10	70.3	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.42 H	10	49.2	-2.4
5	4934.00	41.7 PK	74.0	-32.3	1.56 H	210	39.3	2.4
6	4934.00	31.4 AV	54.0	-22.6	1.56 H	210	29.0	2.4
7	7401.00	55.2 PK	74.0	-18.8	2.14 H	95	47.3	7.9
8	7401.00	39.5 AV	54.0	-14.5	2.14 H	95	31.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.4 PK			2.91 V	180	121.8	-2.4
2	*2467.00	107.9 AV			2.91 V	180	110.3	-2.4
3	2483.50	67.4 PK	74.0	-6.6	2.91 V	180	69.8	-2.4
4	2483.50	46.9 AV	54.0	-7.1	2.91 V	180	49.3	-2.4
5	4934.00	50.3 PK	74.0	-23.7	3.31 V	176	47.9	2.4
6	4934.00	38.0 AV	54.0	-16.0	3.31 V	176	35.6	2.4
7	7401.00	57.3 PK	74.0	-16.7	2.34 V	116	49.4	7.9
8	7401.00	40.8 AV	54.0	-13.2	2.34 V	116	32.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.8 PK			1.43 H	10	119.2	-2.4
2	*2472.00	105.6 AV			1.43 H	10	108.0	-2.4
3	2483.50	70.8 PK	74.0	-3.2	1.43 H	10	73.2	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.43 H	10	52.7	-2.4
5	4944.00	41.5 PK	74.0	-32.5	1.57 H	196	39.1	2.4
6	4944.00	31.2 AV	54.0	-22.8	1.57 H	196	28.8	2.4
7	7416.00	55.1 PK	74.0	-18.9	2.00 H	95	47.1	8.0
8	7416.00	39.3 AV	54.0	-14.7	2.00 H	95	31.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	117.2 PK			3.06 V	144	119.6	-2.4
2	*2472.00	105.9 AV			3.06 V	144	108.3	-2.4
3	2483.50	71.9 PK	74.0	-2.1	3.06 V	144	74.3	-2.4
4	2483.50	50.7 AV	54.0	-3.3	3.06 V	144	53.1	-2.4
5	4944.00	50.3 PK	74.0	-23.7	3.35 V	182	47.9	2.4
6	4944.00	37.8 AV	54.0	-16.2	3.35 V	182	35.4	2.4
7	7416.00	56.8 PK	74.0	-17.2	2.38 V	109	48.8	8.0
8	7416.00	40.6 AV	54.0	-13.4	2.38 V	109	32.6	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2372.77	71.4 PK	74.0	-2.6	1.04 H	11	73.4	-2.0
2	2372.77	44.7 AV	54.0	-9.3	1.04 H	11	46.7	-2.0
3	2390.00	67.3 PK	74.0	-6.7	1.04 H	11	69.3	-2.0
4	2390.00	46.8 AV	54.0	-7.2	1.04 H	11	48.8	-2.0
5	*2412.00	117.2 PK			1.04 H	11	119.3	-2.1
6	*2412.00	105.9 AV			1.04 H	11	108.0	-2.1
7	4824.00	41.9 PK	74.0	-32.1	1.41 H	216	39.8	2.1
8	4824.00	31.0 AV	54.0	-23.0	1.41 H	216	28.9	2.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2372.77	64.8 PK	74.0	-9.2	3.25 V	202	66.8	-2.0
2	2372.77	45.3 AV	54.0	-8.7	3.25 V	202	47.3	-2.0
3	2390.00	67.2 PK	74.0	-6.8	3.25 V	202	69.2	-2.0
4	2390.00	46.9 AV	54.0	-7.1	3.25 V	202	48.9	-2.0
5	*2412.00	117.0 PK			3.25 V	202	119.1	-2.1
6	*2412.00	104.9 AV			3.25 V	202	107.0	-2.1
7	4824.00	45.7 PK	74.0	-28.3	3.36 V	150	43.6	2.1
8	4824.00	36.0 AV	54.0	-18.0	3.36 V	150	33.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2381.35	67.6 PK	74.0	-6.4	1.04 H	10	69.6	-2.0
2	2381.35	46.2 AV	54.0	-7.8	1.04 H	10	48.2	-2.0
3	2390.00	68.4 PK	74.0	-5.6	1.04 H	10	70.4	-2.0
4	2390.00	46.2 AV	54.0	-7.8	1.04 H	10	48.2	-2.0
5	*2417.00	117.2 PK			1.04 H	10	119.3	-2.1
6	*2417.00	106.8 AV			1.04 H	10	108.9	-2.1
7	4834.00	42.4 PK	74.0	-31.6	1.42 H	233	40.3	2.1
8	4834.00	31.4 AV	54.0	-22.6	1.42 H	233	29.3	2.1
9	7251.00	51.9 PK	74.0	-22.1	2.07 H	109	44.3	7.6
10	7251.00	37.8 AV	54.0	-16.2	2.07 H	109	30.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2381.35	71.9 PK	74.0	-2.1	2.81 V	146	73.9	-2.0
2	2381.35	46.1 AV	54.0	-7.9	2.81 V	146	48.1	-2.0
3	2390.00	65.4 PK	74.0	-8.6	2.81 V	146	67.4	-2.0
4	2390.00	46.3 AV	54.0	-7.7	2.81 V	146	48.3	-2.0
5	*2417.00	119.2 PK			2.81 V	146	121.3	-2.1
6	*2417.00	106.7 AV			2.81 V	146	108.8	-2.1
7	4834.00	46.1 PK	74.0	-27.9	3.33 V	159	44.0	2.1
8	4834.00	36.2 AV	54.0	-17.8	3.33 V	159	34.1	2.1
9	7251.00	55.0 PK	74.0	-19.0	2.20 V	129	47.4	7.6
10	7251.00	40.3 AV	54.0	-13.7	2.20 V	129	32.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	1.04 H	11	69.4	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.04 H	11	47.6	-2.0
3	*2437.00	118.4 PK			1.04 H	11	120.5	-2.1
4	*2437.00	107.6 AV			1.04 H	11	109.7	-2.1
5	2483.50	61.2 PK	74.0	-12.8	1.04 H	11	63.6	-2.4
6	2483.50	44.9 AV	54.0	-9.1	1.04 H	11	47.3	-2.4
7	4874.00	42.1 PK	74.0	-31.9	1.45 H	218	39.7	2.4
8	4874.00	31.5 AV	54.0	-22.5	1.45 H	218	29.1	2.4
9	7311.00	52.2 PK	74.0	-21.8	2.04 H	98	44.8	7.4
10	7311.00	38.1 AV	54.0	-15.9	2.04 H	98	30.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.3 PK	74.0	-3.7	2.77 V	179	72.3	-2.0
2	2390.00	45.3 AV	54.0	-8.7	2.77 V	179	47.3	-2.0
3	*2437.00	119.7 PK			2.77 V	179	121.8	-2.1
4	*2437.00	107.2 AV			2.77 V	179	109.3	-2.1
5	2483.50	63.7 PK	74.0	-10.3	2.77 V	179	66.1	-2.4
6	2483.50	45.2 AV	54.0	-8.8	2.77 V	179	47.6	-2.4
7	4874.00	46.1 PK	74.0	-27.9	3.32 V	151	43.7	2.4
8	4874.00	36.3 AV	54.0	-17.7	3.32 V	151	33.9	2.4
9	7311.00	55.2 PK	74.0	-18.8	2.25 V	143	47.8	7.4
10	7311.00	40.5 AV	54.0	-13.5	2.25 V	143	33.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	117.5 PK			1.02 H	11	119.9	-2.4
2	*2457.00	106.6 AV			1.02 H	11	109.0	-2.4
3	2483.50	67.3 PK	74.0	-6.7	1.02 H	11	69.7	-2.4
4	2483.50	45.5 AV	54.0	-8.5	1.02 H	11	47.9	-2.4
5	2496.73	69.0 PK	74.0	-5.0	1.02 H	11	71.4	-2.4
6	2496.73	45.3 AV	54.0	-8.7	1.02 H	11	47.7	-2.4
7	4914.00	41.8 PK	74.0	-32.2	1.39 H	225	39.3	2.5
8	4914.00	31.2 AV	54.0	-22.8	1.39 H	225	28.7	2.5
9	7371.00	52.5 PK	74.0	-21.5	2.00 H	96	44.9	7.6
10	7371.00	37.7 AV	54.0	-16.3	2.00 H	96	30.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	117.3 PK			2.95 V	180	119.7	-2.4
2	*2457.00	105.7 AV			2.95 V	180	108.1	-2.4
3	2483.50	62.2 PK	74.0	-11.8	2.95 V	180	64.6	-2.4
4	2483.50	45.6 AV	54.0	-8.4	2.95 V	180	48.0	-2.4
5	2496.73	67.4 PK	74.0	-6.6	2.95 V	180	69.8	-2.4
6	2496.73	44.9 AV	54.0	-9.1	2.95 V	180	47.3	-2.4
7	4914.00	46.0 PK	74.0	-28.0	3.28 V	138	43.5	2.5
8	4914.00	36.0 AV	54.0	-18.0	3.28 V	138	33.5	2.5
9	7371.00	55.4 PK	74.0	-18.6	2.28 V	146	47.8	7.6
10	7371.00	40.2 AV	54.0	-13.8	2.28 V	146	32.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.6 PK			1.20 H	11	119.0	-2.4
2	*2462.00	104.7 AV			1.20 H	11	107.1	-2.4
3	2483.50	62.0 PK	74.0	-12.0	1.20 H	11	64.4	-2.4
4	2483.50	45.8 AV	54.0	-8.2	1.20 H	11	48.2	-2.4
5	2498.03	69.1 PK	74.0	-4.9	1.20 H	11	71.5	-2.4
6	2498.03	44.8 AV	54.0	-9.2	1.20 H	11	47.2	-2.4
7	4924.00	41.7 PK	74.0	-32.3	1.39 H	230	39.2	2.5
8	4924.00	31.0 AV	54.0	-23.0	1.39 H	230	28.5	2.5
9	7386.00	52.0 PK	74.0	-22.0	2.02 H	105	44.3	7.7
10	7386.00	37.2 AV	54.0	-16.8	2.02 H	105	29.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.0 PK			2.97 V	180	118.4	-2.4
2	*2462.00	105.4 AV			2.97 V	180	107.8	-2.4
3	2483.50	65.6 PK	74.0	-8.4	2.97 V	180	68.0	-2.4
4	2483.50	46.5 AV	54.0	-7.5	2.97 V	180	48.9	-2.4
5	2498.03	54.6 PK	74.0	-19.4	2.97 V	180	57.0	-2.4
6	2498.03	44.5 AV	54.0	-9.5	2.97 V	180	46.9	-2.4
7	4924.00	46.5 PK	74.0	-27.5	3.26 V	133	44.0	2.5
8	4924.00	35.7 AV	54.0	-18.3	3.26 V	133	33.2	2.5
9	7386.00	55.0 PK	74.0	-19.0	2.33 V	133	47.3	7.7
10	7386.00	40.0 AV	54.0	-14.0	2.33 V	133	32.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.0 PK			1.43 H	10	118.4	-2.4
2	*2467.00	104.7 AV			1.43 H	10	107.1	-2.4
3	2483.50	67.1 PK	74.0	-6.9	1.43 H	10	69.5	-2.4
4	2483.50	47.3 AV	54.0	-6.7	1.43 H	10	49.7	-2.4
5	4934.00	41.4 PK	74.0	-32.6	1.35 H	240	39.0	2.4
6	4934.00	30.7 AV	54.0	-23.3	1.35 H	240	28.3	2.4
7	7401.00	52.0 PK	74.0	-22.0	1.99 H	117	44.1	7.9
8	7401.00	37.0 AV	54.0	-17.0	1.99 H	117	29.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.4 PK			2.97 V	180	119.8	-2.4
2	*2467.00	105.4 AV			2.97 V	180	107.8	-2.4
3	2483.50	69.2 PK	74.0	-4.8	2.97 V	180	71.6	-2.4
4	2483.50	47.7 AV	54.0	-6.3	2.97 V	180	50.1	-2.4
5	4934.00	46.0 PK	74.0	-28.0	3.27 V	141	43.6	2.4
6	4934.00	35.5 AV	54.0	-18.5	3.27 V	141	33.1	2.4
7	7401.00	54.3 PK	74.0	-19.7	2.38 V	138	46.4	7.9
8	7401.00	39.6 AV	54.0	-14.4	2.38 V	138	31.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.9 PK			1.43 H	10	116.3	-2.4
2	*2472.00	102.3 AV			1.43 H	10	104.7	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.43 H	10	73.8	-2.4
4	2483.50	49.9 AV	54.0	-4.1	1.43 H	10	52.3	-2.4
5	4944.00	41.0 PK	74.0	-33.0	1.36 H	233	38.6	2.4
6	4944.00	30.4 AV	54.0	-23.6	1.36 H	233	28.0	2.4
7	7416.00	52.1 PK	74.0	-21.9	2.00 H	127	44.1	8.0
8	7416.00	36.8 AV	54.0	-17.2	2.00 H	127	28.8	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.4 PK			2.69 V	176	115.8	-2.4
2	*2472.00	102.2 AV			2.69 V	176	104.6	-2.4
3	2483.50	67.8 PK	74.0	-6.2	2.69 V	176	70.2	-2.4
4	2483.50	50.1 AV	54.0	-3.9	2.69 V	176	52.5	-2.4
5	4944.00	45.9 PK	74.0	-28.1	3.23 V	137	43.5	2.4
6	4944.00	35.2 AV	54.0	-18.8	3.23 V	137	32.8	2.4
7	7416.00	54.0 PK	74.0	-20.0	2.38 V	139	46.0	8.0
8	7416.00	39.4 AV	54.0	-14.6	2.38 V	139	31.4	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2380.46	69.1 PK	74.0	-4.9	1.05 H	12	71.1	-2.0
2	2380.46	44.9 AV	54.0	-9.1	1.05 H	12	46.9	-2.0
3	2390.00	65.0 PK	74.0	-9.0	1.05 H	12	67.0	-2.0
4	2390.00	47.0 AV	54.0	-7.0	1.05 H	12	49.0	-2.0
5	*2412.00	113.3 PK			1.05 H	12	115.4	-2.1
6	*2412.00	102.6 AV			1.05 H	12	104.7	-2.1
7	4824.00	40.2 PK	74.0	-33.8	1.59 H	232	38.1	2.1
8	4824.00	29.0 AV	54.0	-25.0	1.59 H	232	26.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2380.46	64.8 PK	74.0	-9.2	2.80 V	146	66.8	-2.0
2	2380.46	45.4 AV	54.0	-8.6	2.80 V	146	47.4	-2.0
3	2390.00	66.9 PK	74.0	-7.1	2.80 V	146	68.9	-2.0
4	2390.00	47.6 AV	54.0	-6.4	2.80 V	146	49.6	-2.0
5	*2412.00	114.4 PK			2.80 V	146	116.5	-2.1
6	*2412.00	102.7 AV			2.80 V	146	104.8	-2.1
7	4824.00	43.7 PK	74.0	-30.3	3.27 V	162	41.6	2.1
8	4824.00	34.0 AV	54.0	-20.0	3.27 V	162	31.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.05 H	10	73.6	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.05 H	10	48.3	-2.0
3	*2417.00	113.9 PK			1.05 H	10	116.0	-2.1
4	*2417.00	102.8 AV			1.05 H	10	104.9	-2.1
5	4834.00	40.0 PK	74.0	-34.0	1.55 H	237	37.9	2.1
6	4834.00	29.1 AV	54.0	-24.9	1.55 H	237	27.0	2.1
7	7251.00	50.2 PK	74.0	-23.8	2.05 H	87	42.6	7.6
8	7251.00	36.0 AV	54.0	-18.0	2.05 H	87	28.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	2.58 V	194	70.8	-2.0
2	2390.00	46.0 AV	54.0	-8.0	2.58 V	194	48.0	-2.0
3	*2417.00	114.9 PK			2.58 V	194	117.0	-2.1
4	*2417.00	102.0 AV			2.58 V	194	104.1	-2.1
5	4834.00	43.7 PK	74.0	-30.3	3.29 V	138	41.6	2.1
6	4834.00	34.2 AV	54.0	-19.8	3.29 V	138	32.1	2.1
7	7251.00	53.5 PK	74.0	-20.5	2.39 V	136	45.9	7.6
8	7251.00	38.8 AV	54.0	-15.2	2.39 V	136	31.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	1.05 H	13	72.1	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.05 H	13	48.3	-2.0
3	*2437.00	116.0 PK			1.05 H	13	118.1	-2.1
4	*2437.00	105.1 AV			1.05 H	13	107.2	-2.1
5	2483.50	62.7 PK	74.0	-11.3	1.05 H	13	65.1	-2.4
6	2483.50	45.3 AV	54.0	-8.7	1.05 H	13	47.7	-2.4
7	4874.00	40.3 PK	74.0	-33.7	1.50 H	228	37.9	2.4
8	4874.00	29.2 AV	54.0	-24.8	1.50 H	228	26.8	2.4
9	7311.00	50.0 PK	74.0	-24.0	2.06 H	100	42.6	7.4
10	7311.00	36.1 AV	54.0	-17.9	2.06 H	100	28.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	2.73 V	177	72.6	-2.0
2	2390.00	45.5 AV	54.0	-8.5	2.73 V	177	47.5	-2.0
3	*2437.00	116.7 PK			2.73 V	177	118.8	-2.1
4	*2437.00	104.3 AV			2.73 V	177	106.4	-2.1
5	2483.50	59.1 PK	74.0	-14.9	2.73 V	177	61.5	-2.4
6	2483.50	44.7 AV	54.0	-9.3	2.73 V	177	47.1	-2.4
7	4874.00	44.1 PK	74.0	-29.9	3.31 V	150	41.7	2.4
8	4874.00	34.5 AV	54.0	-19.5	3.31 V	150	32.1	2.4
9	7311.00	53.8 PK	74.0	-20.2	2.36 V	141	46.4	7.4
10	7311.00	39.0 AV	54.0	-15.0	2.36 V	141	31.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.4 PK			1.02 H	10	116.8	-2.4
2	*2457.00	103.3 AV			1.02 H	10	105.7	-2.4
3	2483.50	67.8 PK	74.0	-6.2	1.02 H	10	70.2	-2.4
4	2483.50	46.2 AV	54.0	-7.8	1.02 H	10	48.6	-2.4
5	4914.00	40.5 PK	74.0	-33.5	1.49 H	242	38.0	2.5
6	4914.00	29.1 AV	54.0	-24.9	1.49 H	242	26.6	2.5
7	7371.00	49.7 PK	74.0	-24.3	2.05 H	96	42.1	7.6
8	7371.00	35.9 AV	54.0	-18.1	2.05 H	96	28.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.0 PK			2.61 V	146	116.4	-2.4
2	*2457.00	102.4 AV			2.61 V	146	104.8	-2.4
3	2483.50	72.2 PK	74.0	-1.8	2.61 V	146	74.6	-2.4
4	2483.50	46.3 AV	54.0	-7.7	2.61 V	146	48.7	-2.4
5	4914.00	43.4 PK	74.0	-30.6	3.33 V	139	40.9	2.5
6	4914.00	33.7 AV	54.0	-20.3	3.33 V	139	31.2	2.5
7	7371.00	53.7 PK	74.0	-20.3	2.41 V	126	46.1	7.6
8	7371.00	38.8 AV	54.0	-15.2	2.41 V	126	31.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.2 PK			1.41 H	10	115.6	-2.4
2	*2462.00	101.2 AV			1.41 H	10	103.6	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.41 H	10	74.1	-2.4
4	2483.50	46.4 AV	54.0	-7.6	1.41 H	10	48.8	-2.4
5	4924.00	40.0 PK	74.0	-34.0	1.64 H	238	37.5	2.5
6	4924.00	28.8 AV	54.0	-25.2	1.64 H	238	26.3	2.5
7	7386.00	49.7 PK	74.0	-24.3	2.07 H	102	42.0	7.7
8	7386.00	35.7 AV	54.0	-18.3	2.07 H	102	28.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			3.05 V	143	115.8	-2.4
2	*2462.00	101.9 AV			3.05 V	143	104.3	-2.4
3	2483.50	67.7 PK	74.0	-6.3	3.05 V	143	70.1	-2.4
4	2483.50	47.1 AV	54.0	-6.9	3.05 V	143	49.5	-2.4
5	4924.00	43.2 PK	74.0	-30.8	3.35 V	141	40.7	2.5
6	4924.00	33.4 AV	54.0	-20.6	3.35 V	141	30.9	2.5
7	7386.00	53.7 PK	74.0	-20.3	2.38 V	139	46.0	7.7
8	7386.00	38.6 AV	54.0	-15.4	2.38 V	139	30.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.3 PK			1.42 H	10	115.7	-2.4
2	*2467.00	101.3 AV			1.42 H	10	103.7	-2.4
3	2483.50	70.7 PK	74.0	-3.3	1.42 H	10	73.1	-2.4
4	2483.50	50.1 AV	54.0	-3.9	1.42 H	10	52.5	-2.4
5	4934.00	39.9 PK	74.0	-34.1	1.66 H	230	37.5	2.4
6	4934.00	28.4 AV	54.0	-25.6	1.66 H	230	26.0	2.4
7	7401.00	49.0 PK	74.0	-25.0	2.05 H	111	41.1	7.9
8	7401.00	35.2 AV	54.0	-18.8	2.05 H	111	27.3	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.5 PK			3.06 V	144	116.9	-2.4
2	*2467.00	102.0 AV			3.06 V	144	104.4	-2.4
3	2483.50	68.7 PK	74.0	-5.3	3.06 V	144	71.1	-2.4
4	2483.50	50.8 AV	54.0	-3.2	3.06 V	144	53.2	-2.4
5	4934.00	43.3 PK	74.0	-30.7	3.35 V	148	40.9	2.4
6	4934.00	33.3 AV	54.0	-20.7	3.35 V	148	30.9	2.4
7	7401.00	53.5 PK	74.0	-20.5	2.36 V	154	45.6	7.9
8	7401.00	38.3 AV	54.0	-15.7	2.36 V	154	30.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.4 PK			1.41 H	11	114.8	-2.4
2	*2472.00	99.9 AV			1.41 H	11	102.3	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.41 H	11	74.6	-2.4
4	2483.50	50.2 AV	54.0	-3.8	1.41 H	11	52.6	-2.4
5	4944.00	39.5 PK	74.0	-34.5	1.64 H	218	37.1	2.4
6	4944.00	28.3 AV	54.0	-25.7	1.64 H	218	25.9	2.4
7	7416.00	48.7 PK	74.0	-25.3	2.01 H	112	40.7	8.0
8	7416.00	35.0 AV	54.0	-19.0	2.01 H	112	27.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.3 PK			3.06 V	145	114.7	-2.4
2	*2472.00	100.5 AV			3.06 V	145	102.9	-2.4
3	2483.50	68.7 PK	74.0	-5.3	3.06 V	145	71.1	-2.4
4	2483.50	51.0 AV	54.0	-3.0	3.06 V	145	53.4	-2.4
5	4944.00	43.2 PK	74.0	-30.8	3.40 V	159	40.8	2.4
6	4944.00	33.0 AV	54.0	-21.0	3.40 V	159	30.6	2.4
7	7416.00	53.2 PK	74.0	-20.8	2.39 V	166	45.2	8.0
8	7416.00	38.1 AV	54.0	-15.9	2.39 V	166	30.1	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.06 H	12	72.9	-2.0
2	2390.00	45.9 AV	54.0	-8.1	1.06 H	12	47.9	-2.0
3	*2412.00	115.4 PK			1.06 H	12	117.5	-2.1
4	*2412.00	103.8 AV			1.06 H	12	105.9	-2.1
5	4824.00	40.0 PK	74.0	-34.0	1.51 H	255	37.9	2.1
6	4824.00	29.0 AV	54.0	-25.0	1.51 H	255	26.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	2.43 V	174	66.9	-2.0
2	2390.00	46.0 AV	54.0	-8.0	2.43 V	174	48.0	-2.0
3	*2412.00	115.4 PK			2.43 V	174	117.5	-2.1
4	*2412.00	103.6 AV			2.43 V	174	105.7	-2.1
5	4824.00	44.0 PK	74.0	-30.0	3.32 V	111	41.9	2.1
6	4824.00	34.5 AV	54.0	-19.5	3.32 V	111	32.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.05 H	11	68.1	-2.0
2	2390.00	45.3 AV	54.0	-8.7	1.05 H	11	47.3	-2.0
3	*2417.00	115.0 PK			1.05 H	11	117.1	-2.1
4	*2417.00	103.5 AV			1.05 H	11	105.6	-2.1
5	4834.00	40.3 PK	74.0	-33.7	1.45 H	255	38.2	2.1
6	4834.00	29.3 AV	54.0	-24.7	1.45 H	255	27.2	2.1
7	7251.00	50.4 PK	74.0	-23.6	2.19 H	110	42.8	7.6
8	7251.00	36.2 AV	54.0	-17.8	2.19 H	110	28.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	2.46 V	173	66.8	-2.0
2	2390.00	45.2 AV	54.0	-8.8	2.46 V	173	47.2	-2.0
3	*2417.00	116.3 PK			2.46 V	173	118.4	-2.1
4	*2417.00	103.5 AV			2.46 V	173	105.6	-2.1
5	4834.00	44.6 PK	74.0	-29.4	3.28 V	127	42.5	2.1
6	4834.00	35.0 AV	54.0	-19.0	3.28 V	127	32.9	2.1
7	7251.00	54.0 PK	74.0	-20.0	2.28 V	132	46.4	7.6
8	7251.00	39.2 AV	54.0	-14.8	2.28 V	132	31.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.05 H	11	71.9	-2.0
2	2390.00	45.2 AV	54.0	-8.8	1.05 H	11	47.2	-2.0
3	*2437.00	116.9 PK			1.05 H	11	119.0	-2.1
4	*2437.00	105.8 AV			1.05 H	11	107.9	-2.1
5	2483.50	58.0 PK	74.0	-16.0	1.05 H	11	60.4	-2.4
6	2483.50	44.6 AV	54.0	-9.4	1.05 H	11	47.0	-2.4
7	4874.00	41.0 PK	74.0	-33.0	1.46 H	268	38.6	2.4
8	4874.00	29.8 AV	54.0	-24.2	1.46 H	268	27.4	2.4
9	7311.00	50.4 PK	74.0	-23.6	2.16 H	118	43.0	7.4
10	7311.00	36.2 AV	54.0	-17.8	2.16 H	118	28.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	2.00 V	205	73.7	-2.0
2	2390.00	45.4 AV	54.0	-8.6	2.00 V	205	47.4	-2.0
3	*2437.00	114.9 PK			2.00 V	205	117.0	-2.1
4	*2437.00	103.8 AV			2.00 V	205	105.9	-2.1
5	2483.50	60.4 PK	74.0	-13.6	2.00 V	205	62.8	-2.4
6	2483.50	44.8 AV	54.0	-9.2	2.00 V	205	47.2	-2.4
7	4874.00	44.8 PK	74.0	-29.2	3.26 V	143	42.4	2.4
8	4874.00	35.1 AV	54.0	-18.9	3.26 V	143	32.7	2.4
9	7311.00	54.1 PK	74.0	-19.9	2.22 V	142	46.7	7.4
10	7311.00	39.5 AV	54.0	-14.5	2.22 V	142	32.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.3 PK			1.03 H	11	116.7	-2.4
2	*2457.00	103.7 AV			1.03 H	11	106.1	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.03 H	11	74.1	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.03 H	11	48.0	-2.4
5	4914.00	40.5 PK	74.0	-33.5	1.45 H	258	38.0	2.5
6	4914.00	29.5 AV	54.0	-24.5	1.45 H	258	27.0	2.5
7	7371.00	50.3 PK	74.0	-23.7	2.10 H	110	42.7	7.6
8	7371.00	36.0 AV	54.0	-18.0	2.10 H	110	28.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.9 PK			2.46 V	217	117.3	-2.4
2	*2457.00	103.7 AV			2.46 V	217	106.1	-2.4
3	2483.50	69.5 PK	74.0	-4.5	1.00 V	0	71.9	-2.4
4	2483.50	45.5 AV	54.0	-8.5	1.00 V	0	47.9	-2.4
5	4914.00	44.3 PK	74.0	-29.7	3.36 V	120	41.8	2.5
6	4914.00	34.9 AV	54.0	-19.1	3.36 V	120	32.4	2.5
7	7371.00	53.8 PK	74.0	-20.2	2.33 V	141	46.2	7.6
8	7371.00	38.8 AV	54.0	-15.2	2.33 V	141	31.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.7 PK			1.02 H	11	118.1	-2.4
2	*2462.00	103.7 AV			1.02 H	11	106.1	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.02 H	11	74.8	-2.4
4	2483.50	45.7 AV	54.0	-8.3	1.02 H	11	48.1	-2.4
5	4924.00	40.2 PK	74.0	-33.8	1.50 H	268	37.7	2.5
6	4924.00	29.4 AV	54.0	-24.6	1.50 H	268	26.9	2.5
7	7386.00	49.8 PK	74.0	-24.2	2.20 H	96	42.1	7.7
8	7386.00	35.8 AV	54.0	-18.2	2.20 H	96	28.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.1 PK			2.40 V	171	118.5	-2.4
2	*2462.00	103.5 AV			2.40 V	171	105.9	-2.4
3	2483.50	65.5 PK	74.0	-8.5	2.40 V	171	67.9	-2.4
4	2483.50	45.9 AV	54.0	-8.1	2.40 V	171	48.3	-2.4
5	4924.00	43.9 PK	74.0	-30.1	3.31 V	125	41.4	2.5
6	4924.00	34.5 AV	54.0	-19.5	3.31 V	125	32.0	2.5
7	7386.00	53.5 PK	74.0	-20.5	2.32 V	149	45.8	7.7
8	7386.00	38.6 AV	54.0	-15.4	2.32 V	149	30.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.9 PK			1.42 H	10	118.3	-2.4
2	*2467.00	103.5 AV			1.42 H	10	105.9	-2.4
3	2483.50	68.8 PK	74.0	-5.2	1.42 H	10	71.2	-2.4
4	2483.50	48.2 AV	54.0	-5.8	1.42 H	10	50.6	-2.4
5	4934.00	39.7 PK	74.0	-34.3	1.55 H	262	37.3	2.4
6	4934.00	29.0 AV	54.0	-25.0	1.55 H	262	26.6	2.4
7	7401.00	49.8 PK	74.0	-24.2	2.15 H	101	41.9	7.9
8	7401.00	35.6 AV	54.0	-18.4	2.15 H	101	27.7	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.4 PK			2.35 V	170	116.8	-2.4
2	*2467.00	103.4 AV			2.35 V	170	105.8	-2.4
3	2483.50	69.1 PK	74.0	-4.9	2.35 V	170	71.5	-2.4
4	2483.50	47.9 AV	54.0	-6.1	2.35 V	170	50.3	-2.4
5	4934.00	43.6 PK	74.0	-30.4	3.27 V	139	41.2	2.4
6	4934.00	34.4 AV	54.0	-19.6	3.27 V	139	32.0	2.4
7	7401.00	53.2 PK	74.0	-20.8	2.35 V	148	45.3	7.9
8	7401.00	38.2 AV	54.0	-15.8	2.35 V	148	30.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.4 PK			1.43 H	10	115.8	-2.4
2	*2472.00	102.3 AV			1.43 H	10	104.7	-2.4
3	2483.50	69.8 PK	74.0	-4.2	1.43 H	10	72.2	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.43 H	10	54.4	-2.4
5	4944.00	39.7 PK	74.0	-34.3	1.49 H	254	37.3	2.4
6	4944.00	28.7 AV	54.0	-25.3	1.49 H	254	26.3	2.4
7	7416.00	49.7 PK	74.0	-24.3	2.16 H	106	41.7	8.0
8	7416.00	35.3 AV	54.0	-18.7	2.16 H	106	27.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.5 PK			2.35 V	170	116.9	-2.4
2	*2472.00	102.5 AV			2.35 V	170	104.9	-2.4
3	2483.50	69.3 PK	74.0	-4.7	2.35 V	170	71.7	-2.4
4	2483.50	50.2 AV	54.0	-3.8	2.35 V	170	52.6	-2.4
5	4944.00	43.4 PK	74.0	-30.6	3.26 V	148	41.0	2.4
6	4944.00	34.2 AV	54.0	-19.8	3.26 V	148	31.8	2.4
7	7416.00	52.6 PK	74.0	-21.4	2.29 V	141	44.6	8.0
8	7416.00	37.8 AV	54.0	-16.2	2.29 V	141	29.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	1.06 H	11	72.0	-2.0
2	2390.00	48.9 AV	54.0	-5.1	1.06 H	11	50.9	-2.0
3	*2412.00	114.9 PK			1.06 H	11	117.0	-2.1
4	*2412.00	102.1 AV			1.06 H	11	104.2	-2.1
5	4824.00	37.8 PK	74.0	-36.2	1.60 H	276	35.7	2.1
6	4824.00	26.8 AV	54.0	-27.2	1.60 H	276	24.7	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	3.09 V	182	74.1	-2.0
2	2390.00	49.1 AV	54.0	-4.9	3.09 V	182	51.1	-2.0
3	*2412.00	113.5 PK			3.09 V	182	115.6	-2.1
4	*2412.00	102.1 AV			3.09 V	182	104.2	-2.1
5	4824.00	41.4 PK	74.0	-32.6	3.33 V	127	39.3	2.1
6	4824.00	30.0 AV	54.0	-24.0	3.33 V	127	27.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.07 H	11	73.5	-2.0
2	2390.00	47.1 AV	54.0	-6.9	1.07 H	11	49.1	-2.0
3	*2417.00	113.3 PK			1.07 H	11	115.4	-2.1
4	*2417.00	101.6 AV			1.07 H	11	103.7	-2.1
5	4834.00	38.6 PK	74.0	-35.4	1.56 H	269	36.5	2.1
6	4834.00	27.3 AV	54.0	-26.7	1.56 H	269	25.2	2.1
7	7251.00	48.7 PK	74.0	-25.3	2.04 H	88	41.1	7.6
8	7251.00	34.4 AV	54.0	-19.6	2.04 H	88	26.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	3.08 V	184	62.9	-2.0
2	2390.00	46.1 AV	54.0	-7.9	3.08 V	184	48.1	-2.0
3	*2417.00	112.7 PK			3.08 V	184	114.8	-2.1
4	*2417.00	101.6 AV			3.08 V	184	103.7	-2.1
5	4834.00	41.7 PK	74.0	-32.3	3.34 V	135	39.6	2.1
6	4834.00	32.0 AV	54.0	-22.0	3.34 V	135	29.9	2.1
7	7251.00	51.5 PK	74.0	-22.5	2.47 V	131	43.9	7.6
8	7251.00	36.8 AV	54.0	-17.2	2.47 V	131	29.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.04 H	11	73.4	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.04 H	11	47.8	-2.0
3	*2437.00	116.6 PK			1.04 H	11	118.7	-2.1
4	*2437.00	103.8 AV			1.04 H	11	105.9	-2.1
5	2483.50	64.6 PK	74.0	-9.4	1.04 H	11	67.0	-2.4
6	2483.50	45.1 AV	54.0	-8.9	1.04 H	11	47.5	-2.4
7	4874.00	38.6 PK	74.0	-35.4	1.56 H	253	36.2	2.4
8	4874.00	27.5 AV	54.0	-26.5	1.56 H	253	25.1	2.4
9	7311.00	48.4 PK	74.0	-25.6	2.08 H	104	41.0	7.4
10	7311.00	34.7 AV	54.0	-19.3	2.08 H	104	27.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	3.11 V	142	74.4	-2.0
2	2390.00	46.0 AV	54.0	-8.0	3.11 V	142	48.0	-2.0
3	*2437.00	115.4 PK			3.11 V	142	117.5	-2.1
4	*2437.00	103.3 AV			3.11 V	142	105.4	-2.1
5	2483.50	62.2 PK	74.0	-11.8	3.11 V	142	64.6	-2.4
6	2483.50	45.3 AV	54.0	-8.7	3.11 V	142	47.7	-2.4
7	4874.00	42.3 PK	74.0	-31.7	3.30 V	151	39.9	2.4
8	4874.00	32.4 AV	54.0	-21.6	3.30 V	151	30.0	2.4
9	7311.00	51.4 PK	74.0	-22.6	2.41 V	136	44.0	7.4
10	7311.00	37.1 AV	54.0	-16.9	2.41 V	136	29.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.8 PK			1.01 H	11	116.2	-2.4
2	*2457.00	102.4 AV			1.01 H	11	104.8	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.01 H	11	73.8	-2.4
4	2483.50	47.0 AV	54.0	-7.0	1.01 H	11	49.4	-2.4
5	4914.00	38.3 PK	74.0	-35.7	1.62 H	268	35.8	2.5
6	4914.00	27.1 AV	54.0	-26.9	1.62 H	268	24.6	2.5
7	7371.00	48.0 PK	74.0	-26.0	2.08 H	114	40.4	7.6
8	7371.00	34.4 AV	54.0	-19.6	2.08 H	114	26.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.7 PK			3.13 V	145	117.1	-2.4
2	*2457.00	102.6 AV			3.13 V	145	105.0	-2.4
3	2483.50	70.5 PK	74.0	-3.5	3.13 V	145	72.9	-2.4
4	2483.50	47.8 AV	54.0	-6.2	3.13 V	145	50.2	-2.4
5	4914.00	41.7 PK	74.0	-32.3	3.32 V	125	39.2	2.5
6	4914.00	32.2 AV	54.0	-21.8	3.32 V	125	29.7	2.5
7	7371.00	51.3 PK	74.0	-22.7	2.51 V	140	43.7	7.6
8	7371.00	36.4 AV	54.0	-17.6	2.51 V	140	28.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.4 PK			1.03 H	8	114.8	-2.4
2	*2462.00	100.8 AV			1.03 H	8	103.2	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.03 H	8	74.4	-2.4
4	2483.50	48.0 AV	54.0	-6.0	1.03 H	8	50.4	-2.4
5	4924.00	38.6 PK	74.0	-35.4	1.52 H	275	36.1	2.5
6	4924.00	26.8 AV	54.0	-27.2	1.52 H	275	24.3	2.5
7	7386.00	48.1 PK	74.0	-25.9	2.01 H	100	40.4	7.7
8	7386.00	33.9 AV	54.0	-20.1	2.01 H	100	26.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			3.14 V	144	115.3	-2.4
2	*2462.00	100.9 AV			3.14 V	144	103.3	-2.4
3	2483.50	66.2 PK	74.0	-7.8	3.14 V	144	68.6	-2.4
4	2483.50	48.1 AV	54.0	-5.9	3.14 V	144	50.5	-2.4
5	4924.00	41.4 PK	74.0	-32.6	3.33 V	123	38.9	2.5
6	4924.00	31.7 AV	54.0	-22.3	3.33 V	123	29.2	2.5
7	7386.00	51.3 PK	74.0	-22.7	2.53 V	125	43.6	7.7
8	7386.00	36.2 AV	54.0	-17.8	2.53 V	125	28.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.7 PK			1.41 H	11	115.1	-2.4
2	*2467.00	100.9 AV			1.41 H	11	103.3	-2.4
3	2483.50	70.7 PK	74.0	-3.3	1.41 H	11	73.1	-2.4
4	2483.50	50.7 AV	54.0	-3.3	1.41 H	11	53.1	-2.4
5	4934.00	38.2 PK	74.0	-35.8	1.56 H	267	35.8	2.4
6	4934.00	26.3 AV	54.0	-27.7	1.56 H	267	23.9	2.4
7	7401.00	48.2 PK	74.0	-25.8	2.01 H	110	40.3	7.9
8	7401.00	33.8 AV	54.0	-20.2	2.01 H	110	25.9	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.0 PK			3.07 V	145	114.4	-2.4
2	*2467.00	100.1 AV			3.07 V	145	102.5	-2.4
3	2483.50	64.5 PK	74.0	-9.5	3.07 V	145	66.9	-2.4
4	2483.50	49.7 AV	54.0	-4.3	3.07 V	145	52.1	-2.4
5	4934.00	41.0 PK	74.0	-33.0	3.38 V	137	38.6	2.4
6	4934.00	31.3 AV	54.0	-22.7	3.38 V	137	28.9	2.4
7	7401.00	51.2 PK	74.0	-22.8	2.53 V	129	43.3	7.9
8	7401.00	36.1 AV	54.0	-17.9	2.53 V	129	28.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.2 PK			1.42 H	9	113.6	-2.4
2	*2472.00	99.5 AV			1.42 H	9	101.9	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.42 H	9	73.7	-2.4
4	2483.50	50.2 AV	54.0	-3.8	1.42 H	9	52.6	-2.4
5	4944.00	38.0 PK	74.0	-36.0	1.58 H	271	35.6	2.4
6	4944.00	26.1 AV	54.0	-27.9	1.58 H	271	23.7	2.4
7	7416.00	48.0 PK	74.0	-26.0	2.06 H	107	40.0	8.0
8	7416.00	33.5 AV	54.0	-20.5	2.06 H	107	25.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.3 PK			3.06 V	145	113.7	-2.4
2	*2472.00	98.8 AV			3.06 V	145	101.2	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.00 V	0	74.0	-2.4
4	2483.50	50.8 AV	54.0	-3.2	1.00 V	0	53.2	-2.4
5	4944.00	41.1 PK	74.0	-32.9	3.40 V	152	38.7	2.4
6	4944.00	31.0 AV	54.0	-23.0	3.40 V	152	28.6	2.4
7	7416.00	50.5 PK	74.0	-23.5	2.57 V	121	42.5	8.0
8	7416.00	35.7 AV	54.0	-18.3	2.57 V	121	27.7	8.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

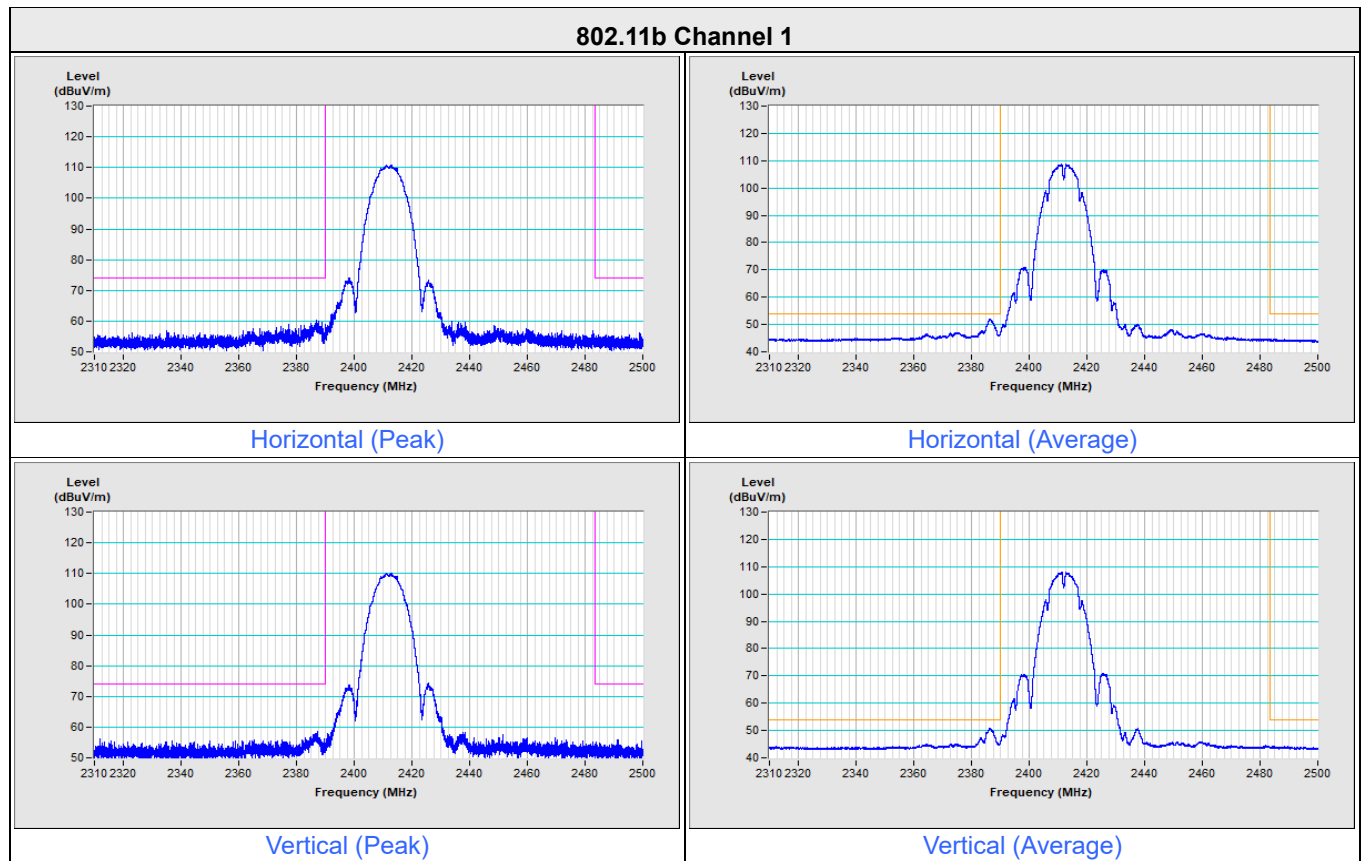


802.11b Channel 2

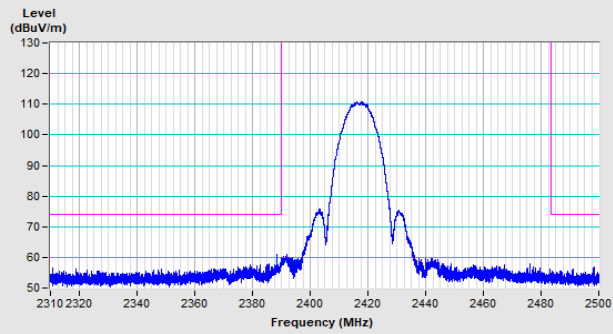


Horizontal (Peak)

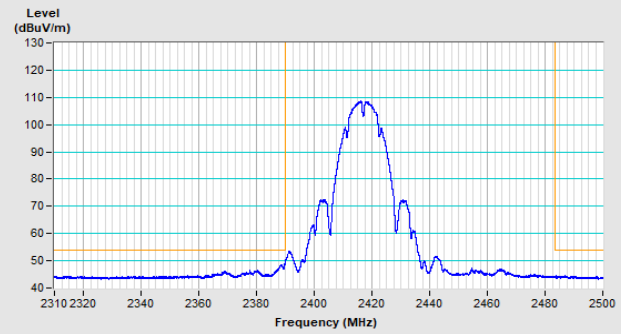

Horizontal (Average)

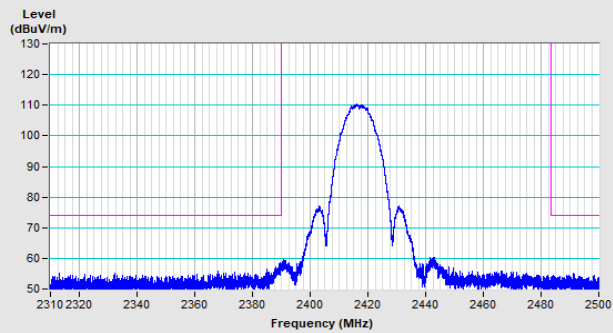


Vertical (Peak)

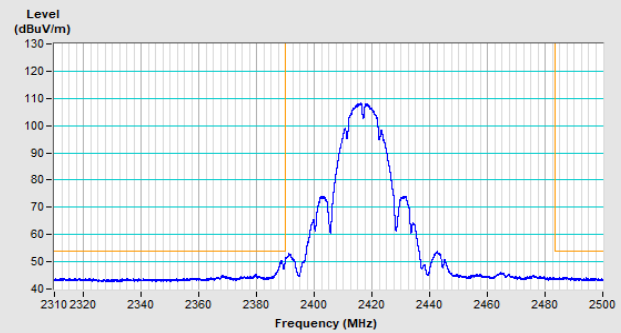


Vertical (Average)


802.11b Channel 10

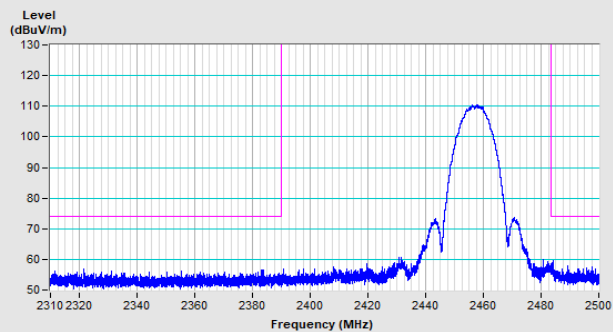


Horizontal (Peak)

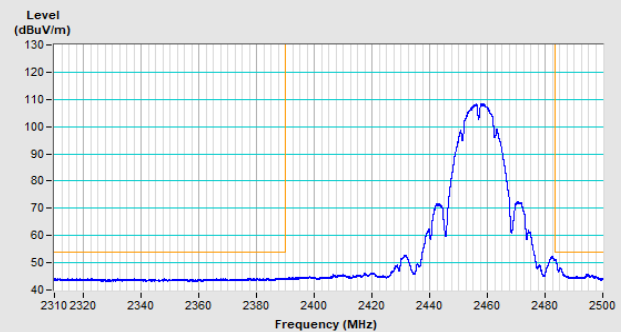

Horizontal (Average)

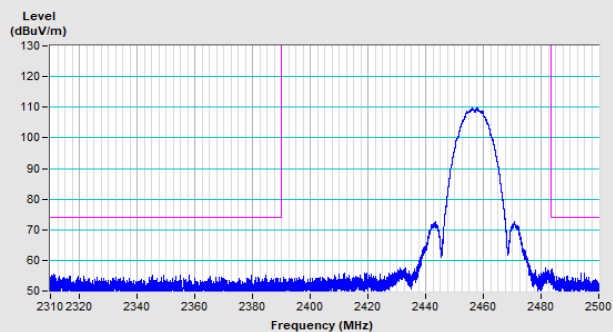


Vertical (Peak)

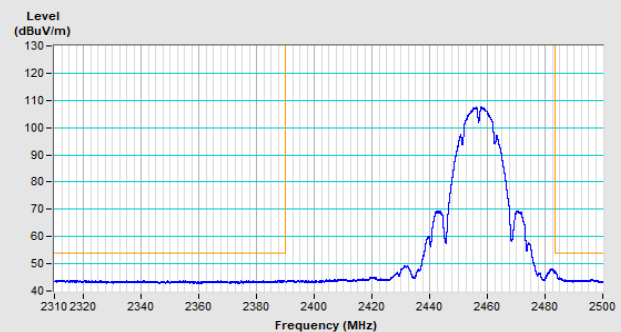


Vertical (Average)


802.11b Channel 11

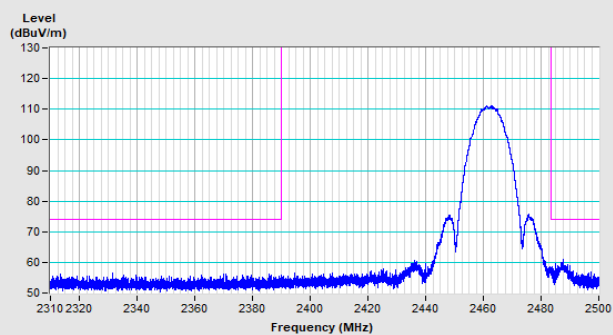


Horizontal (Peak)

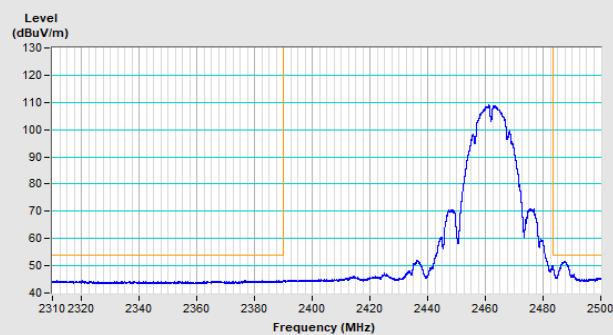

Horizontal (Average)

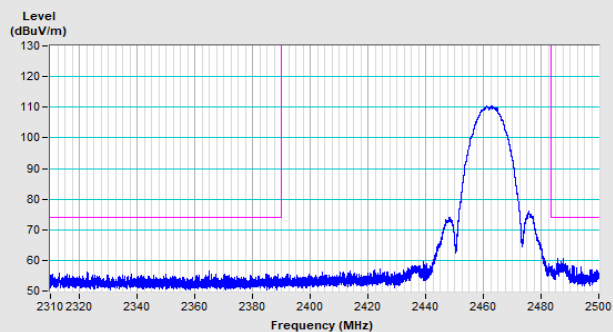


Vertical (Peak)

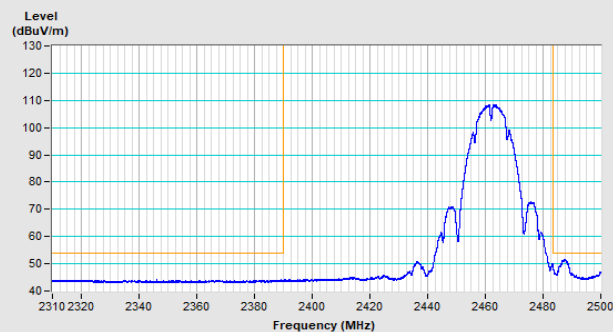


Vertical (Average)


802.11b Channel 12

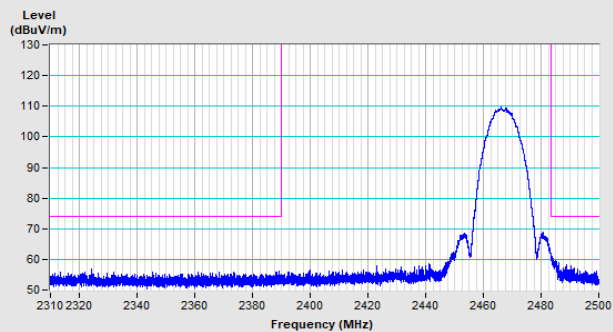


Horizontal (Peak)

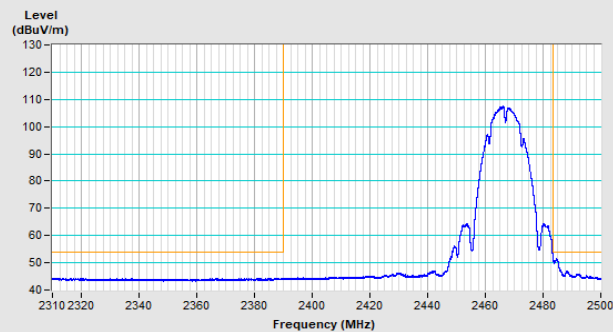

Horizontal (Average)

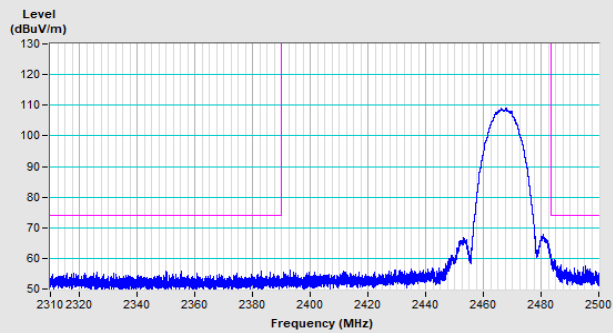


Vertical (Peak)

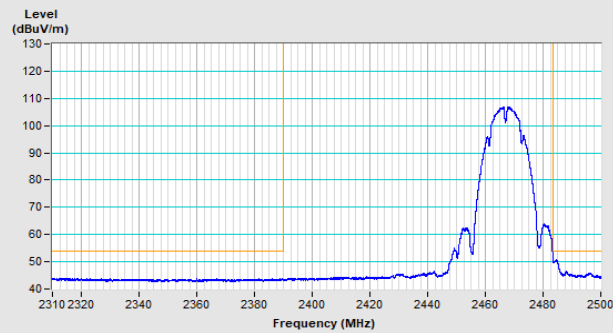


Vertical (Average)


802.11b Channel 13

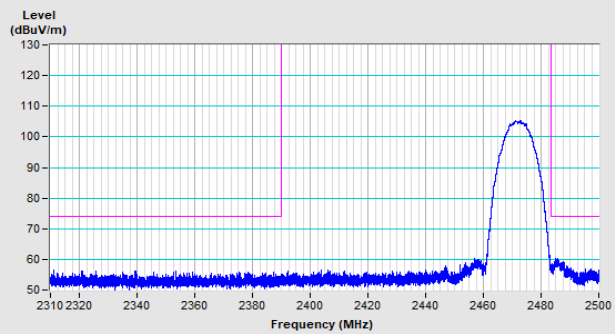


Horizontal (Peak)

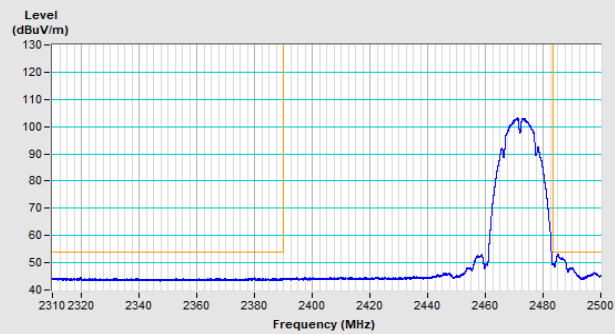

Horizontal (Average)

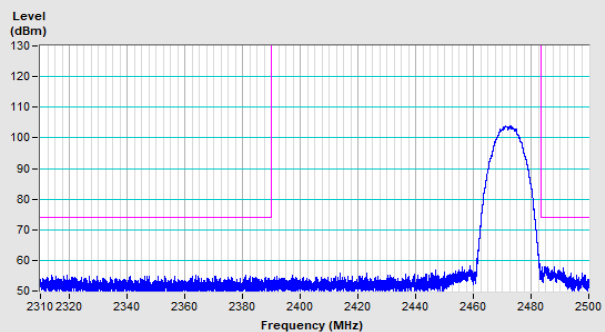


Vertical (Peak)

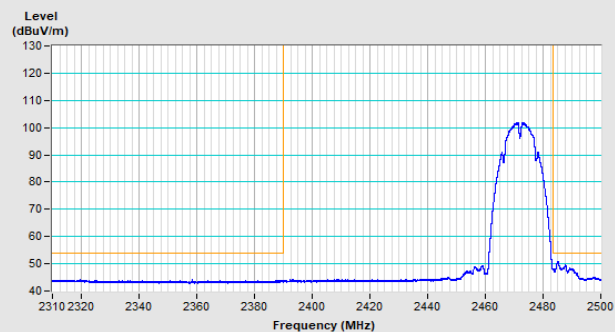


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

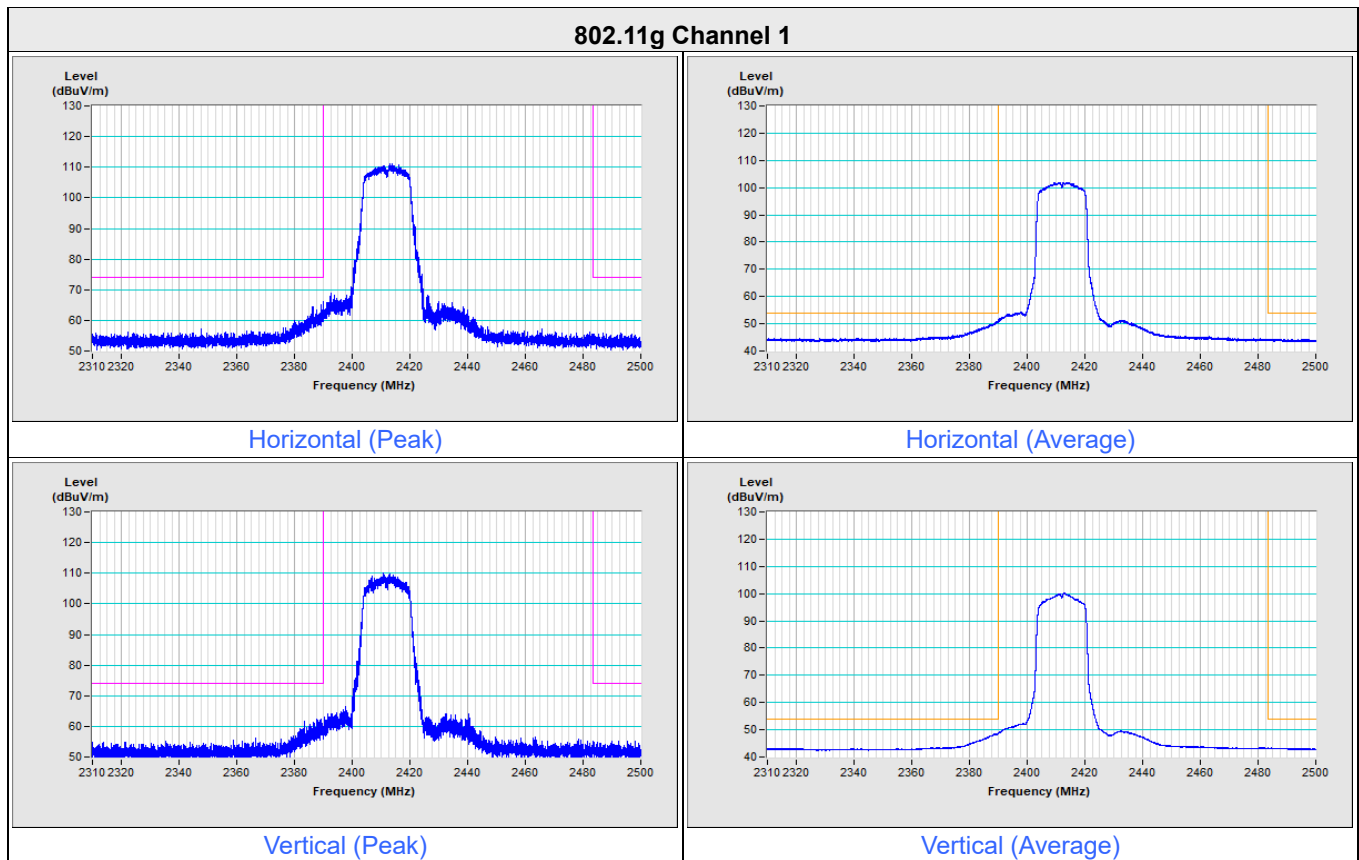


802.11g Channel 2

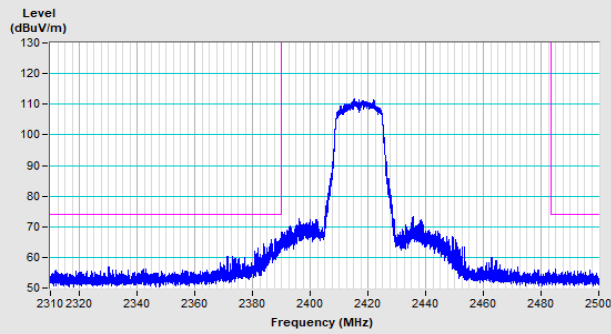


Horizontal (Peak)

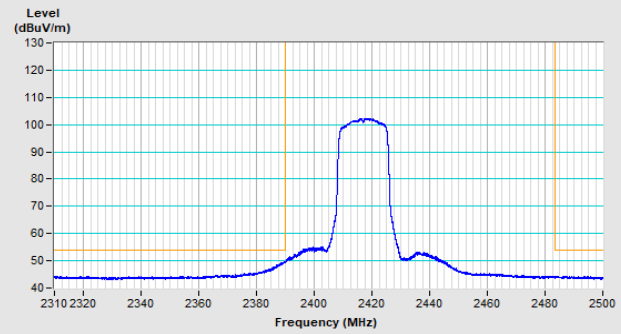

Horizontal (Average)

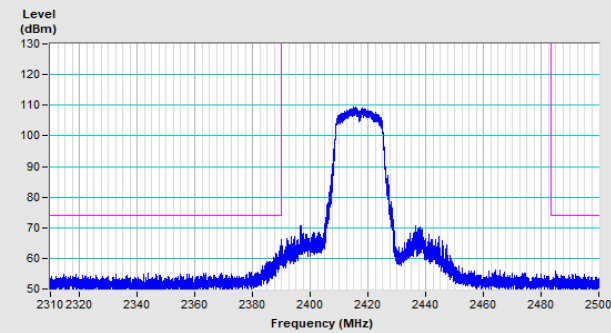


Vertical (Peak)

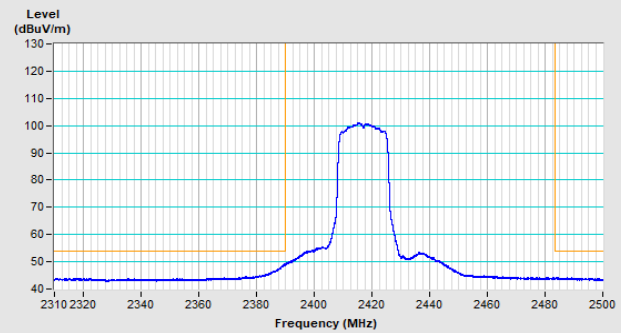


Vertical (Average)


802.11g Channel 10

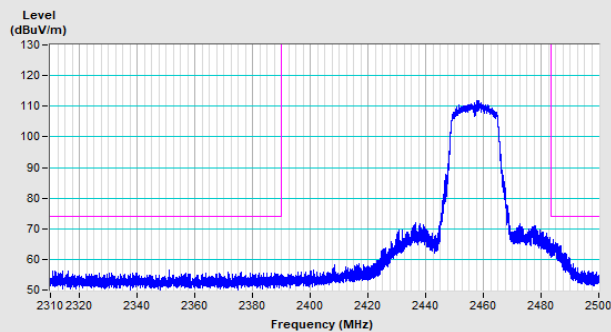


Horizontal (Peak)

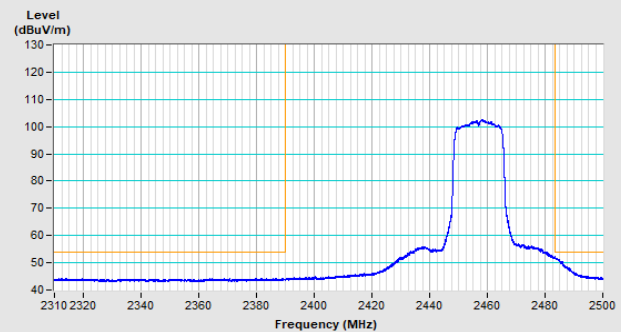

Horizontal (Average)

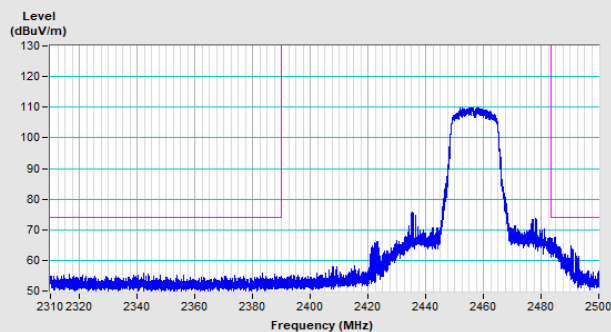


Vertical (Peak)

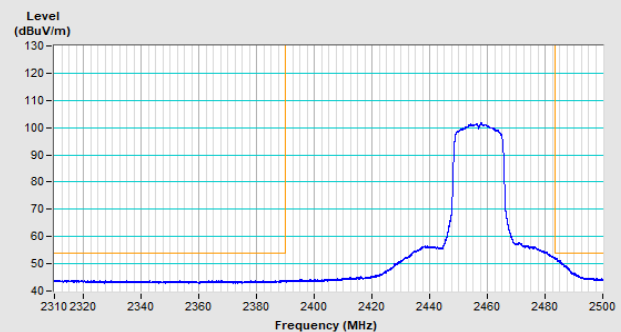


Vertical (Average)


802.11g Channel 11

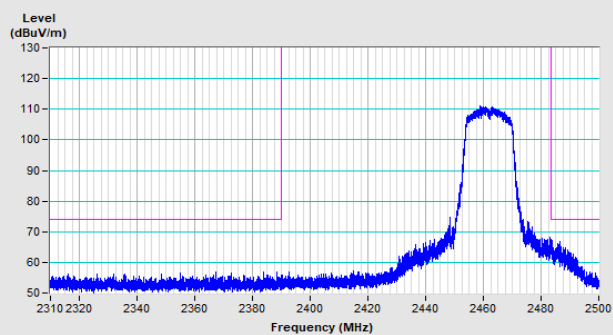


Horizontal (Peak)

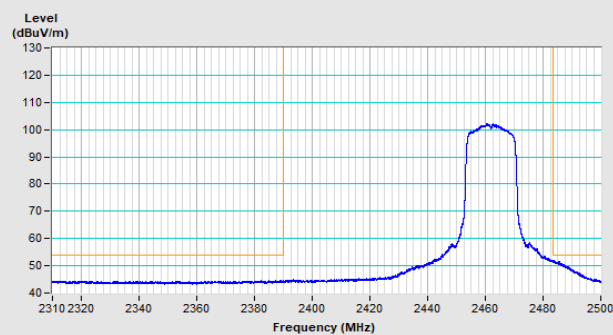

Horizontal (Average)

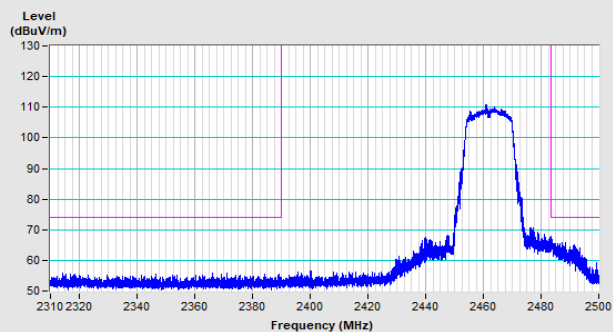


Vertical (Peak)

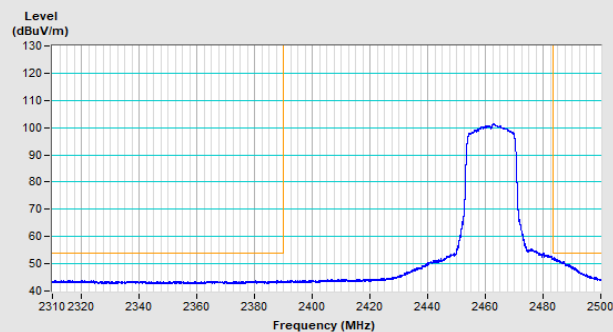


Vertical (Average)


802.11g Channel 12

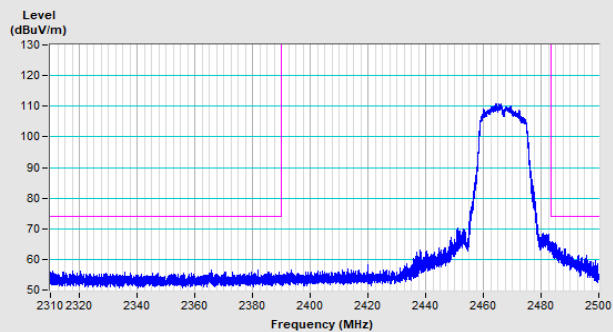


Horizontal (Peak)

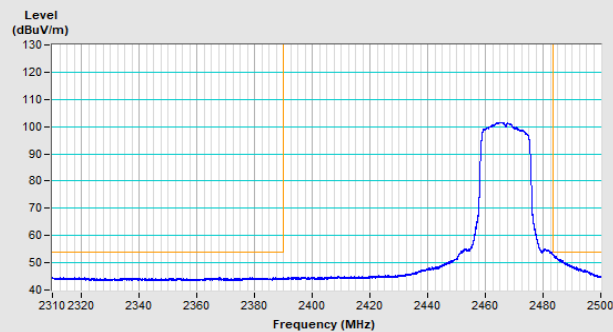

Horizontal (Average)

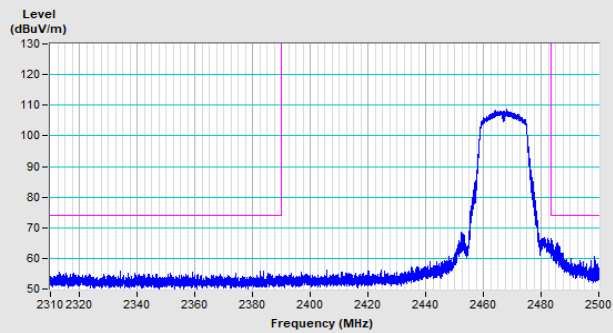


Vertical (Peak)

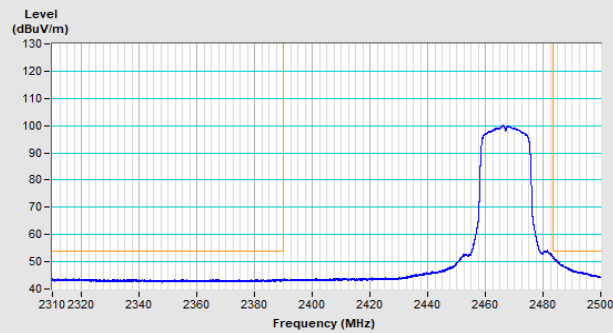


Vertical (Average)


802.11g Channel 13

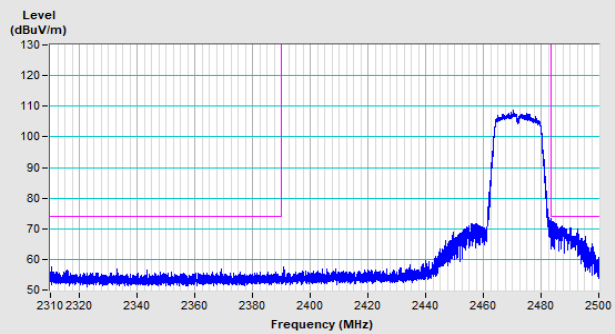


Horizontal (Peak)

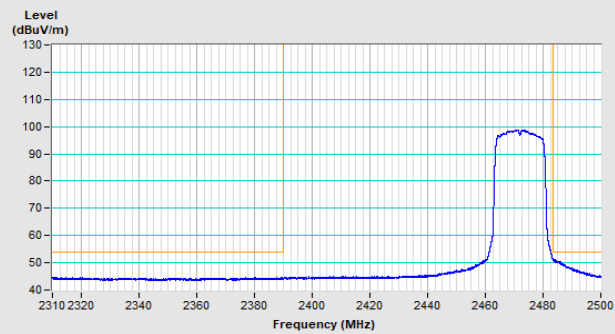

Horizontal (Average)

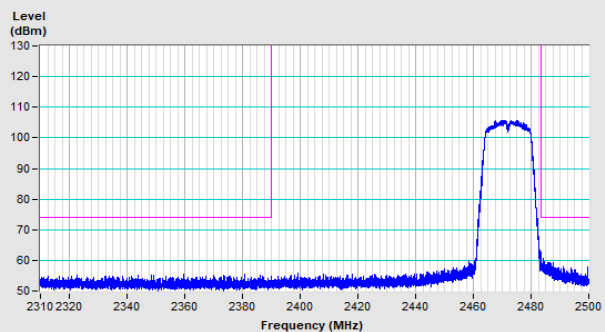


Vertical (Peak)

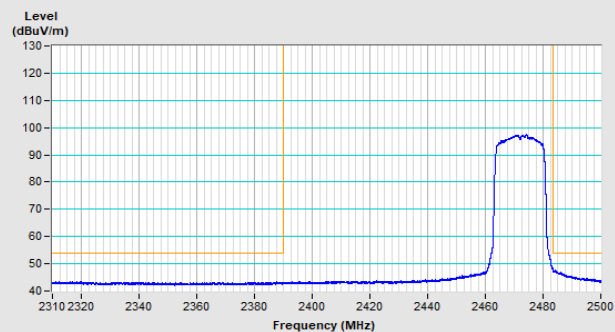


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 1

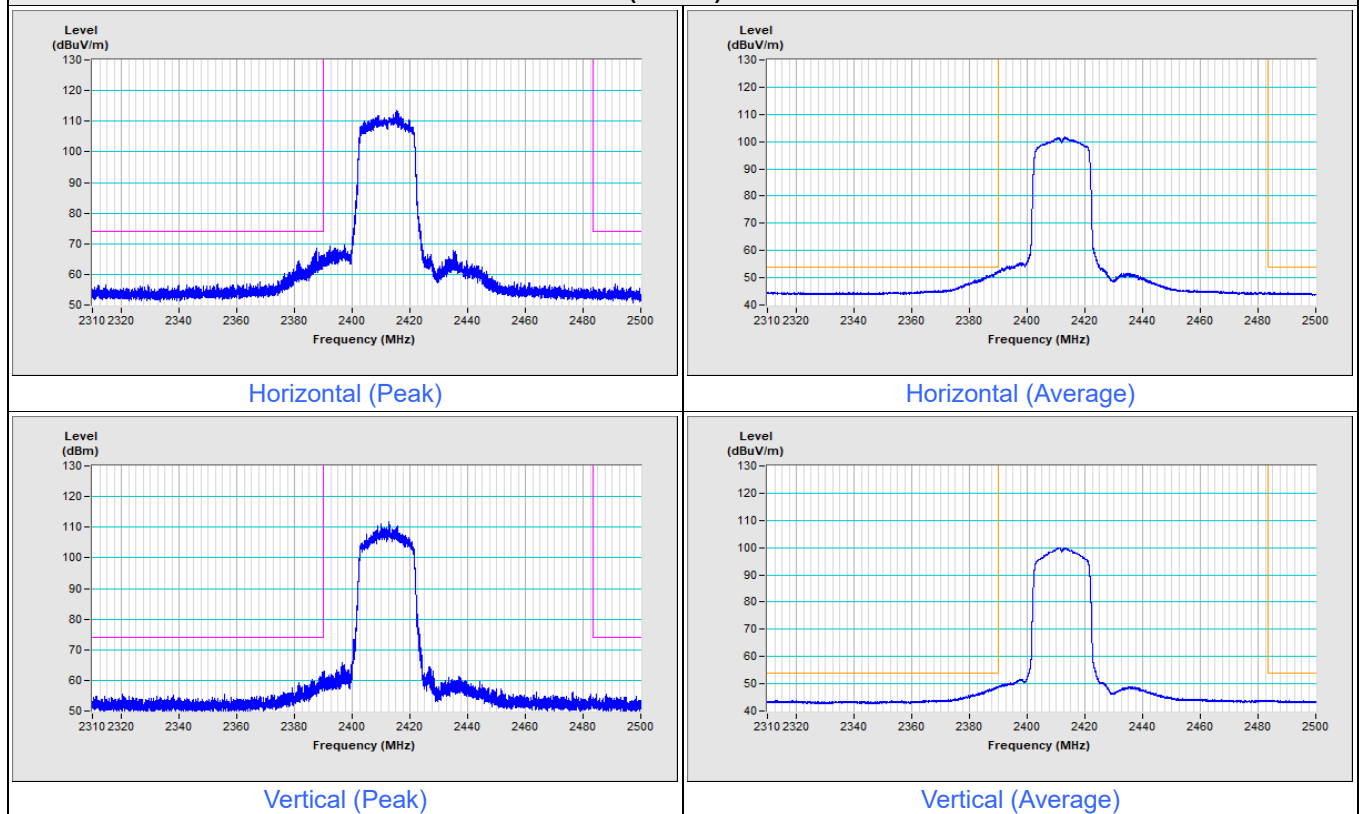


802.11be (EHT20) Channel 2

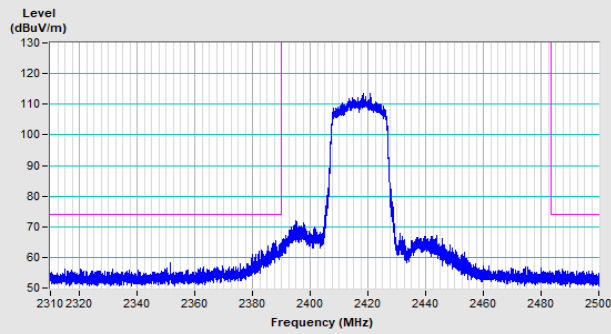


Horizontal (Peak)

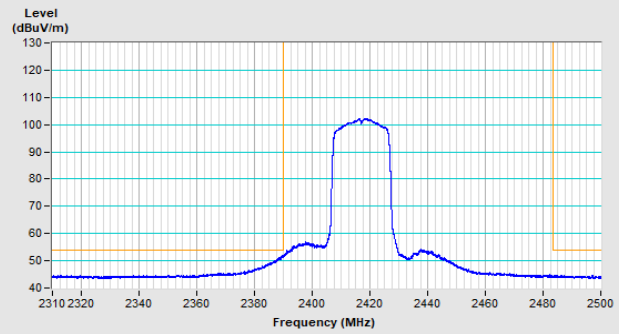

Horizontal (Average)

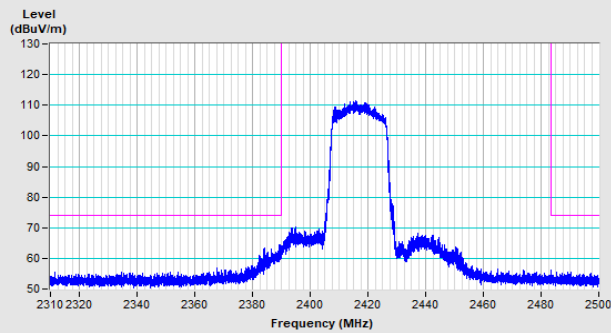


Vertical (Peak)

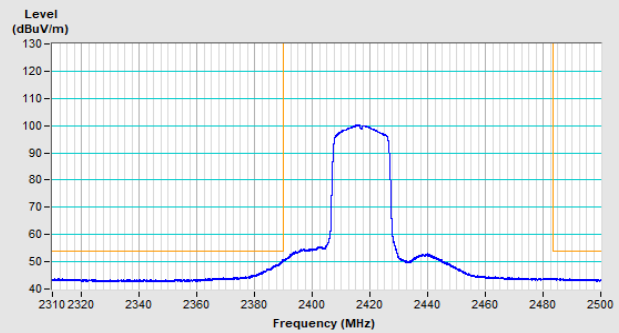


Vertical (Average)


802.11be (EHT20) Channel 10

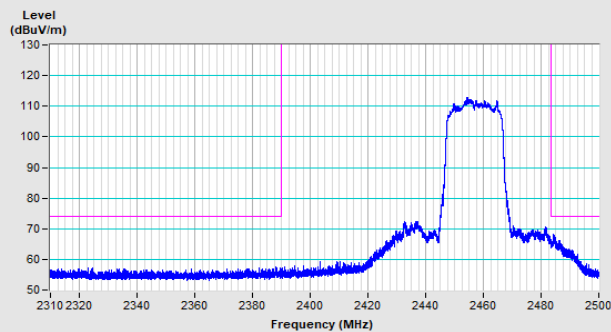


Horizontal (Peak)

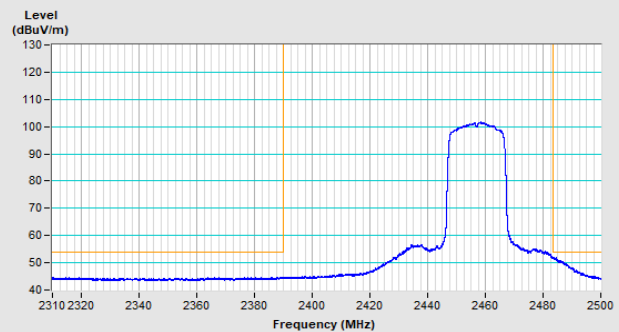

Horizontal (Average)

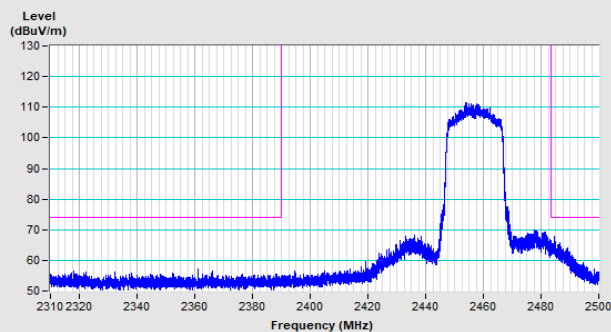


Vertical (Peak)

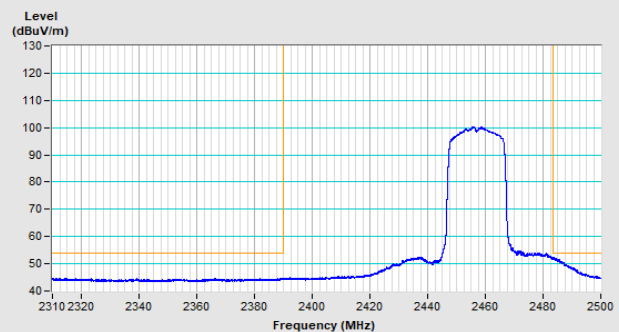


Vertical (Average)


802.11be (EHT20) Channel 11

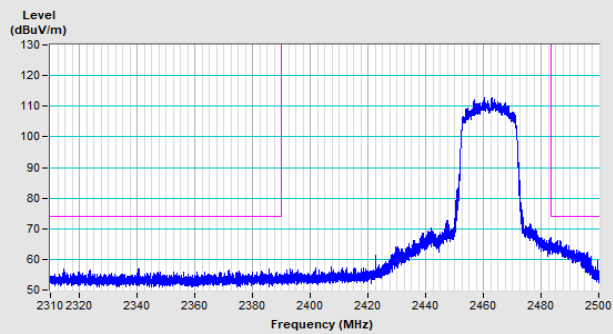


Horizontal (Peak)

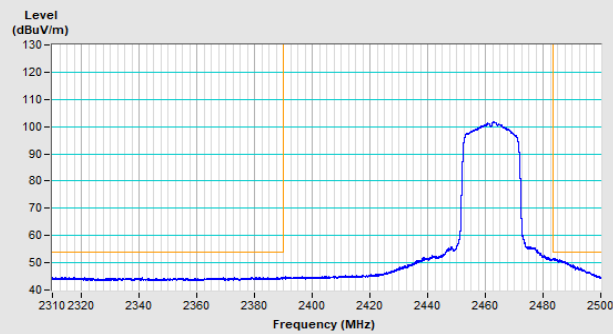

Horizontal (Average)

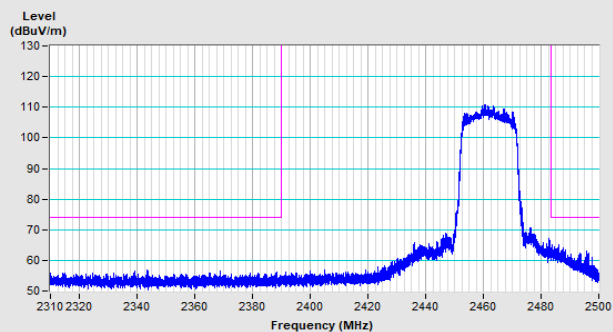


Vertical (Peak)

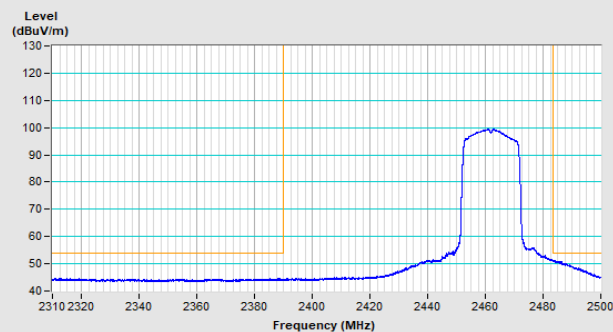


Vertical (Average)


802.11be (EHT20) Channel 12

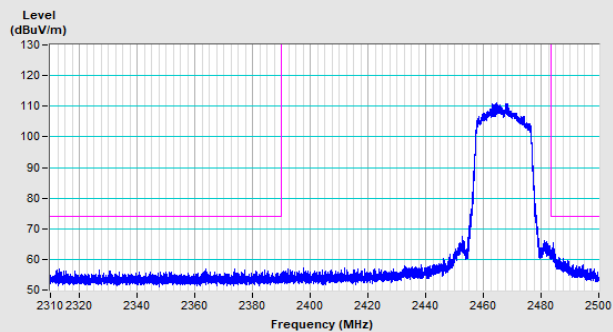


Horizontal (Peak)

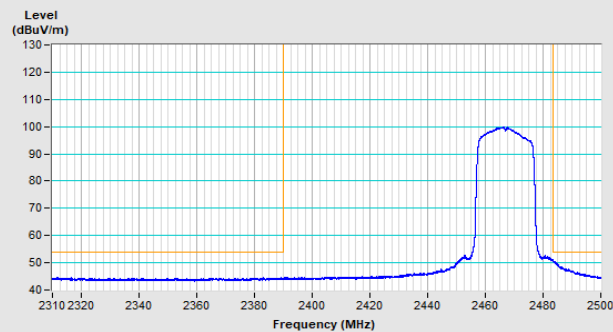

Horizontal (Average)

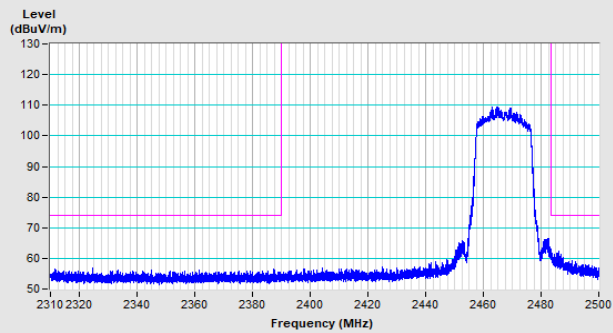


Vertical (Peak)

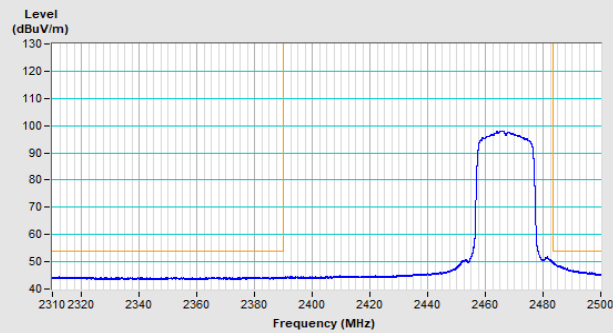


Vertical (Average)


802.11be (EHT20) Channel 13

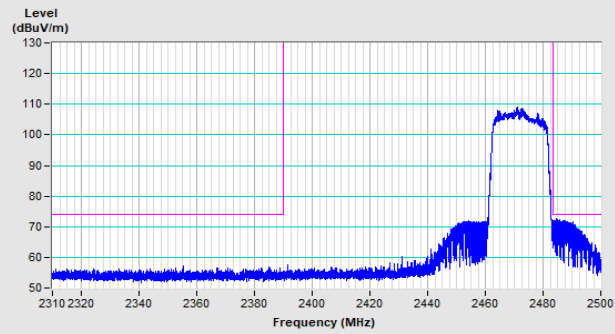


Horizontal (Peak)

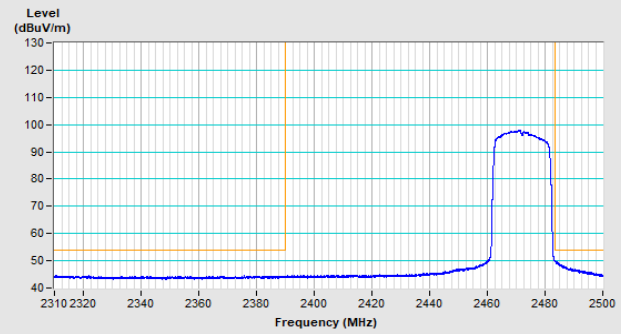

Horizontal (Average)

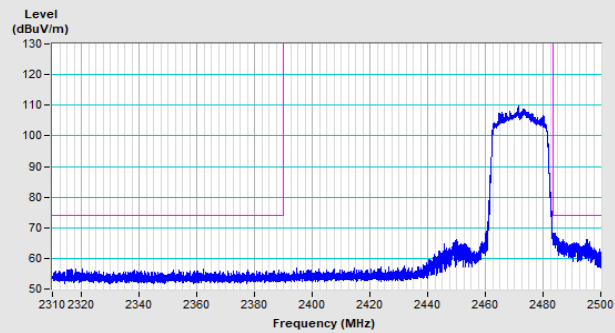


Vertical (Peak)

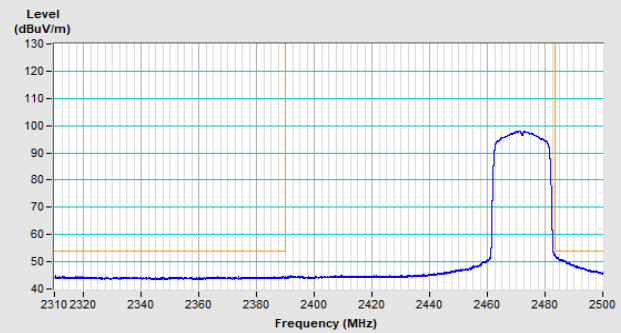


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

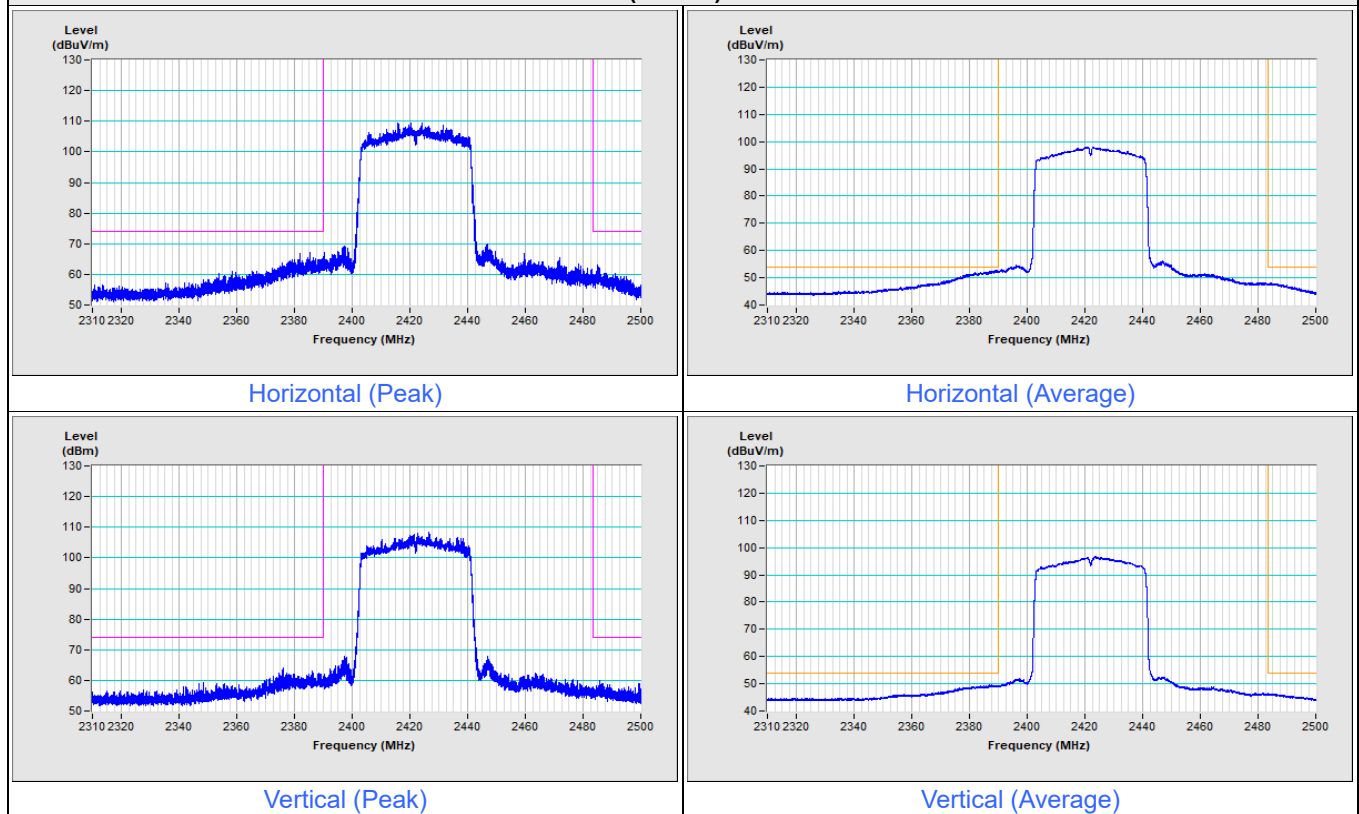


802.11be (EHT40) Channel 9

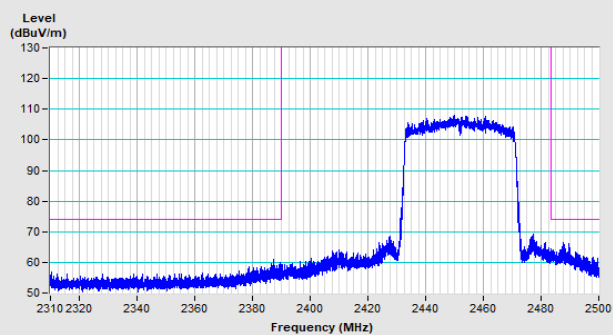


Horizontal (Peak)

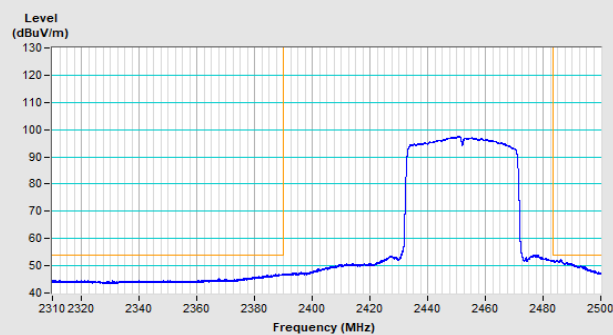

Horizontal (Average)

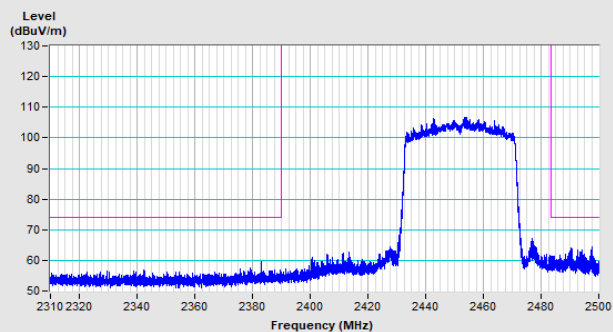


Vertical (Peak)

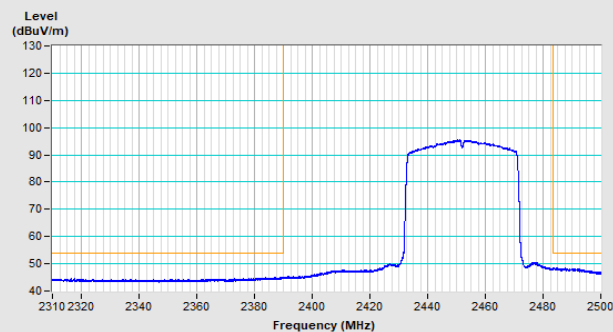


Vertical (Average)


802.11be (EHT40) Channel 10

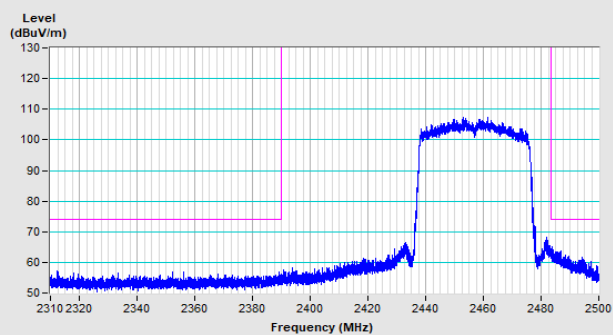


Horizontal (Peak)

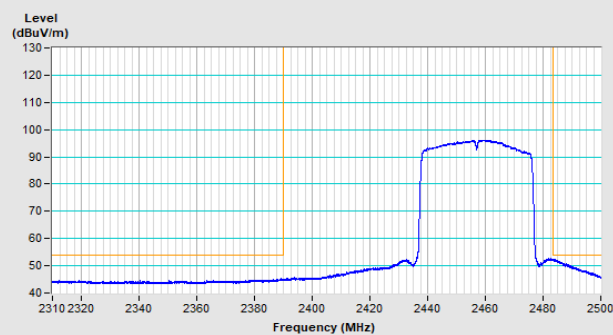

Horizontal (Average)

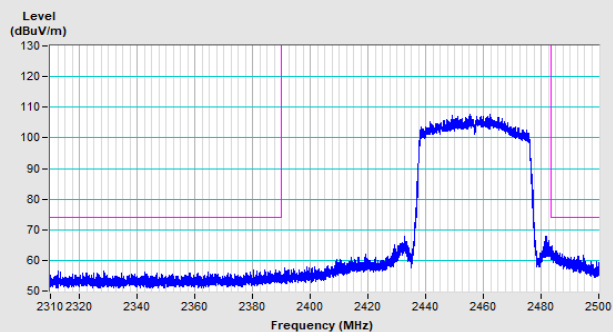


Vertical (Peak)

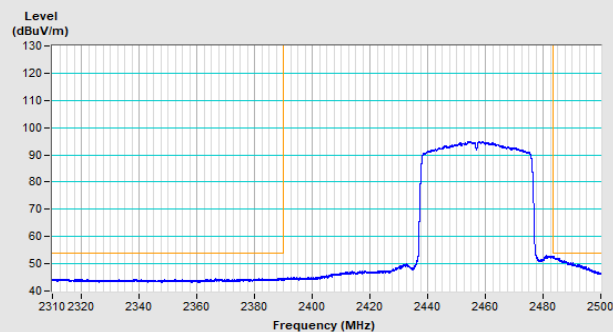


Vertical (Average)


802.11be (EHT40) Channel 11

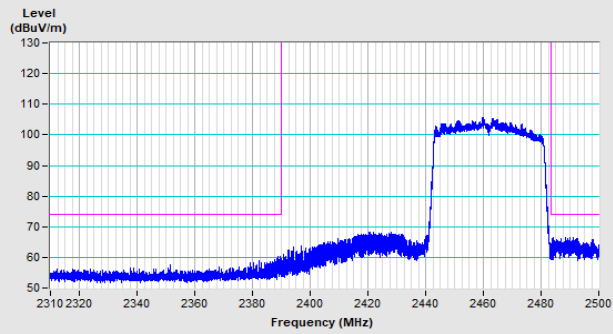


Horizontal (Peak)

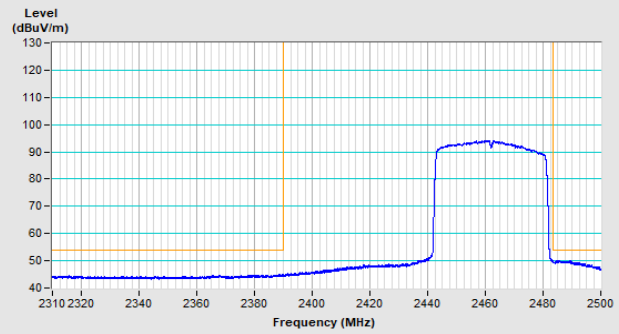

Horizontal (Average)

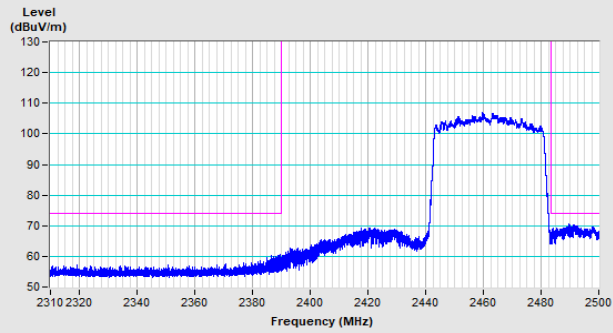


Vertical (Peak)

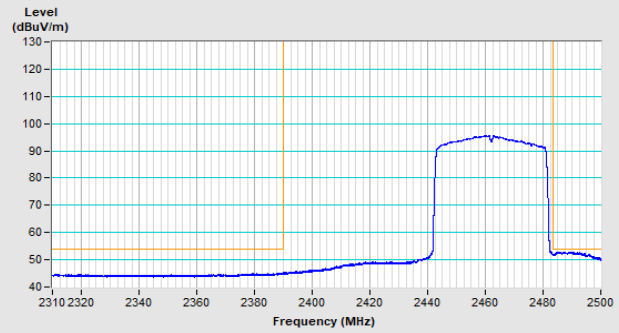


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

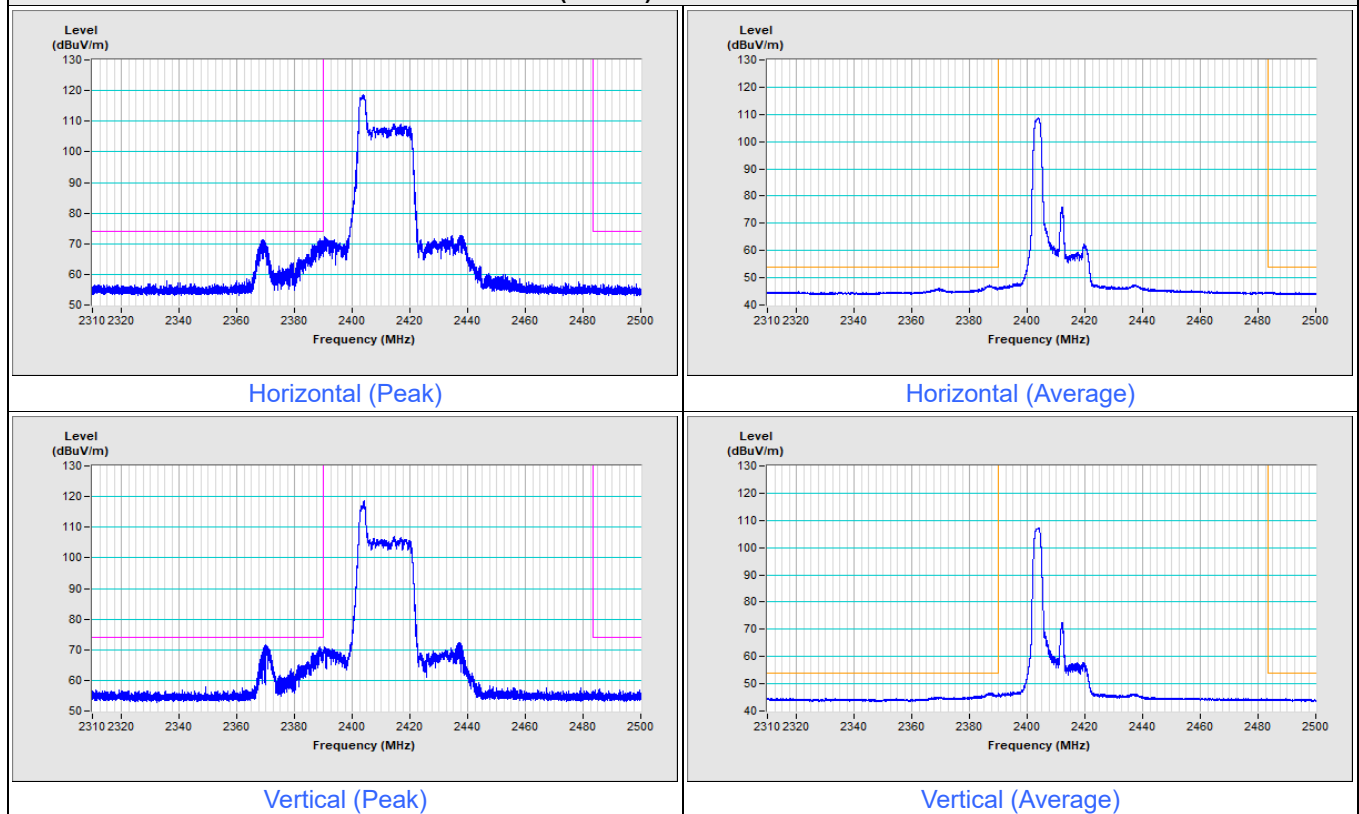


802.11be (EHT20) 26-tone RU Channel 2

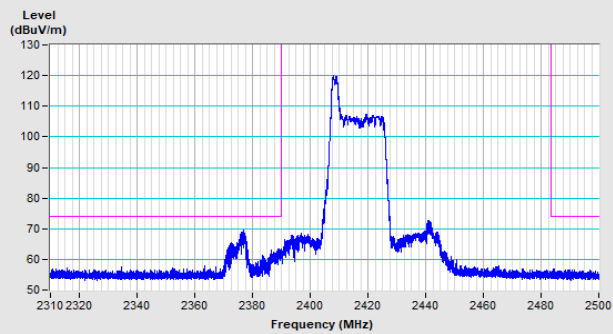


Horizontal (Peak)

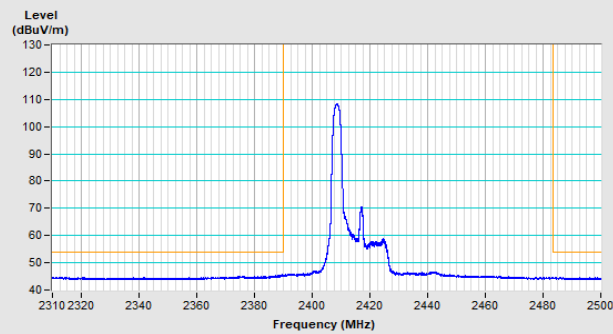

Horizontal (Average)

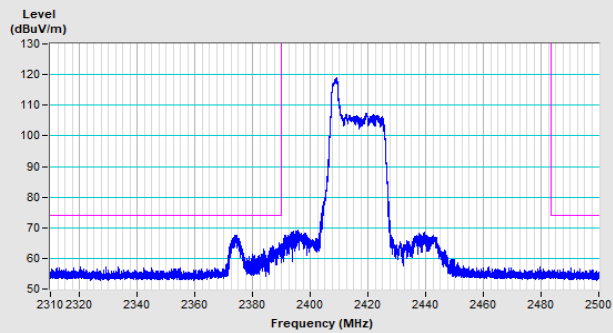


Vertical (Peak)

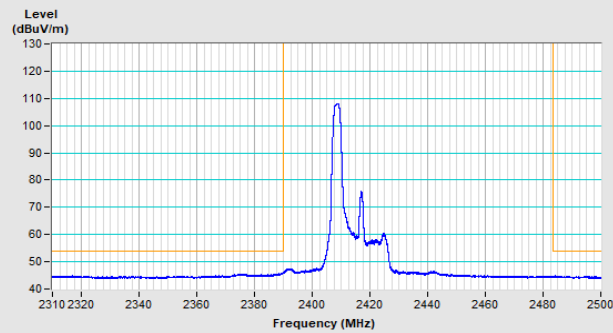


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 10

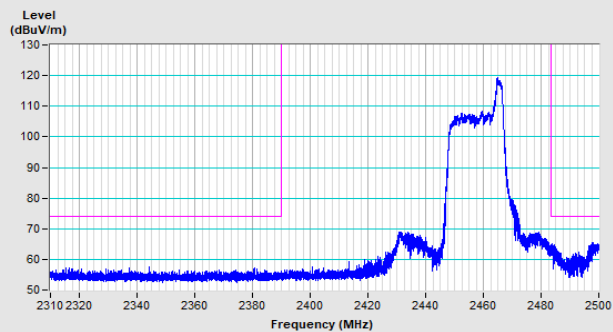


Horizontal (Peak)

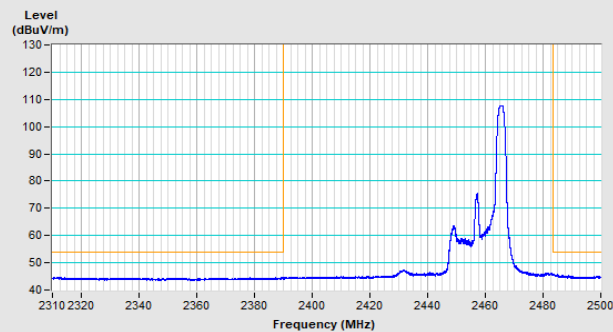

Horizontal (Average)

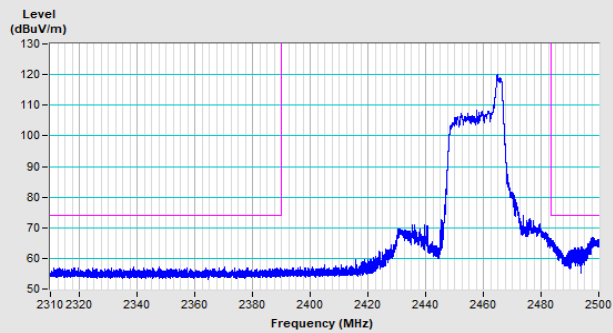


Vertical (Peak)

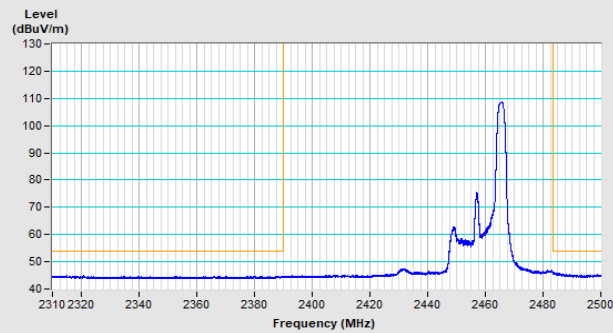


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 11

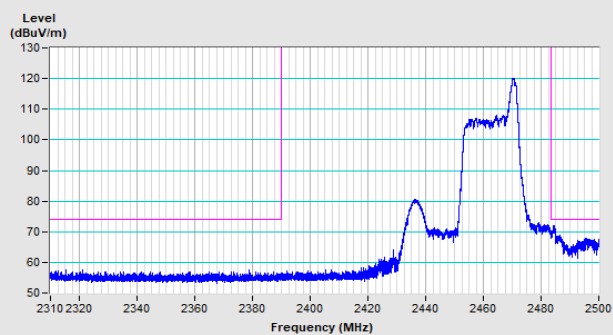


Horizontal (Peak)

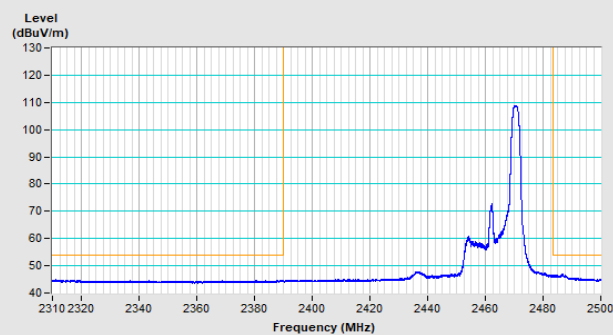

Horizontal (Average)

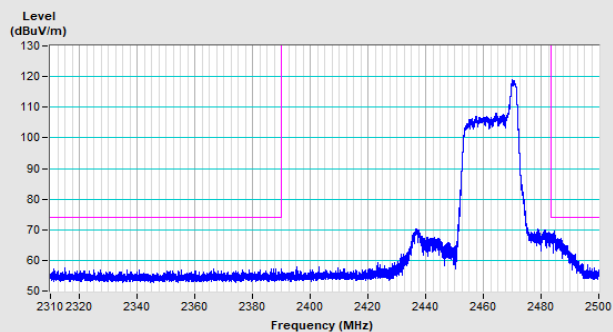


Vertical (Peak)

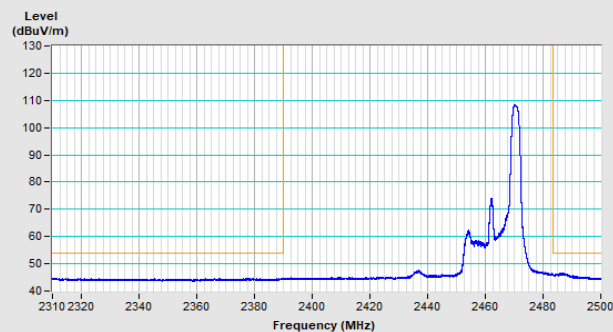


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

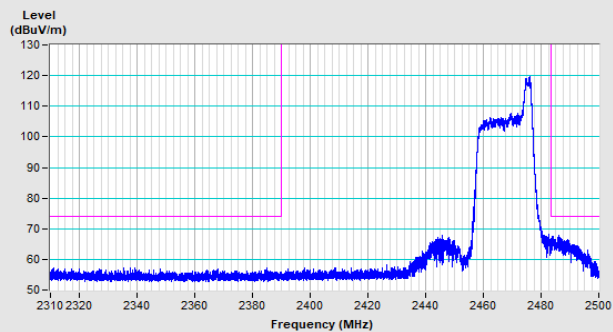


Horizontal (Peak)

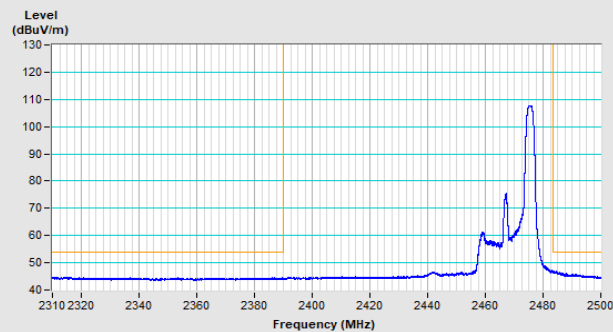

Horizontal (Average)

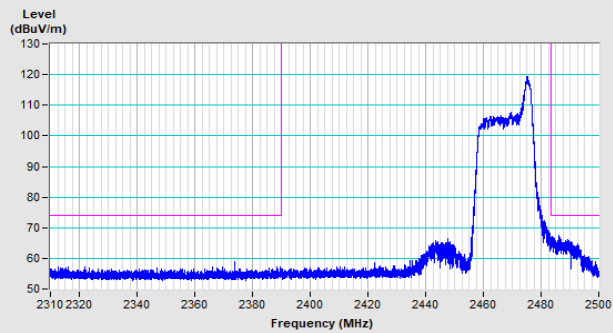


Vertical (Peak)

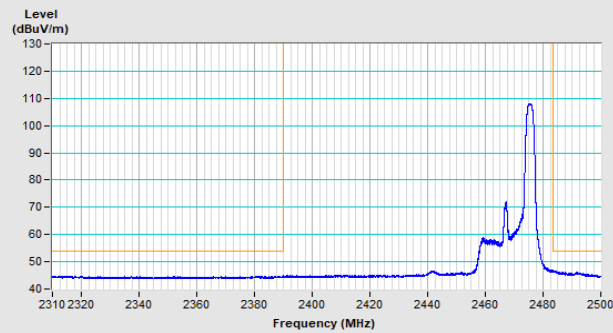


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

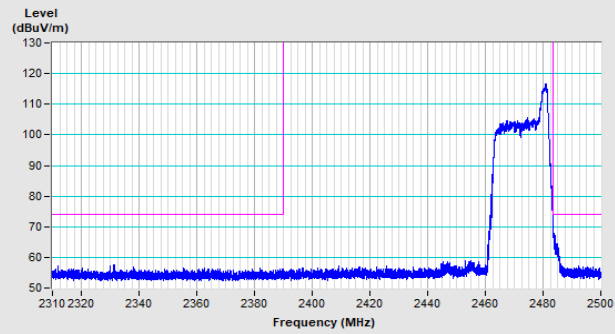


Horizontal (Peak)

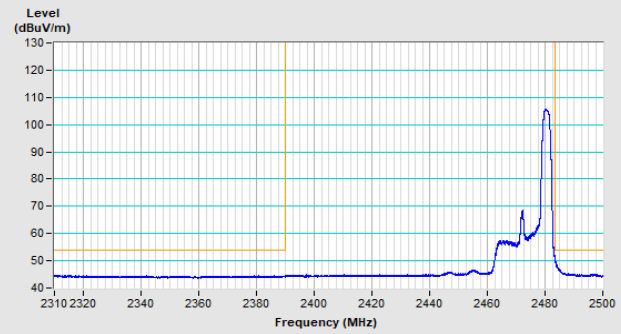

Horizontal (Average)

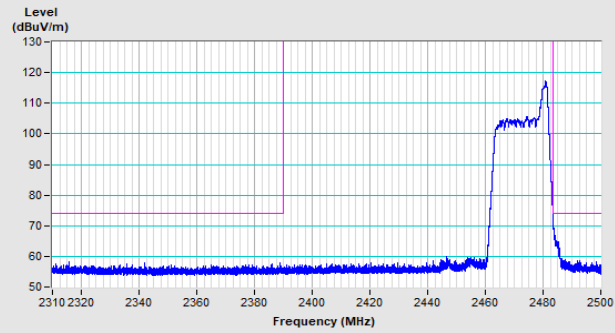


Vertical (Peak)

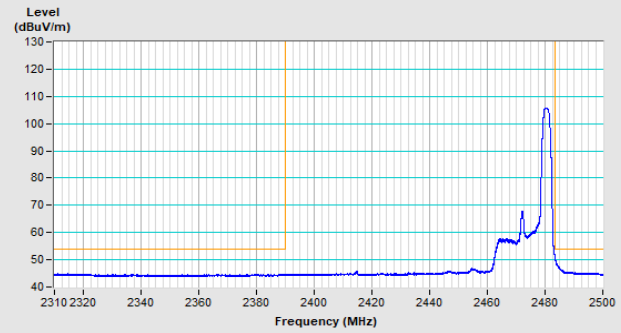


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

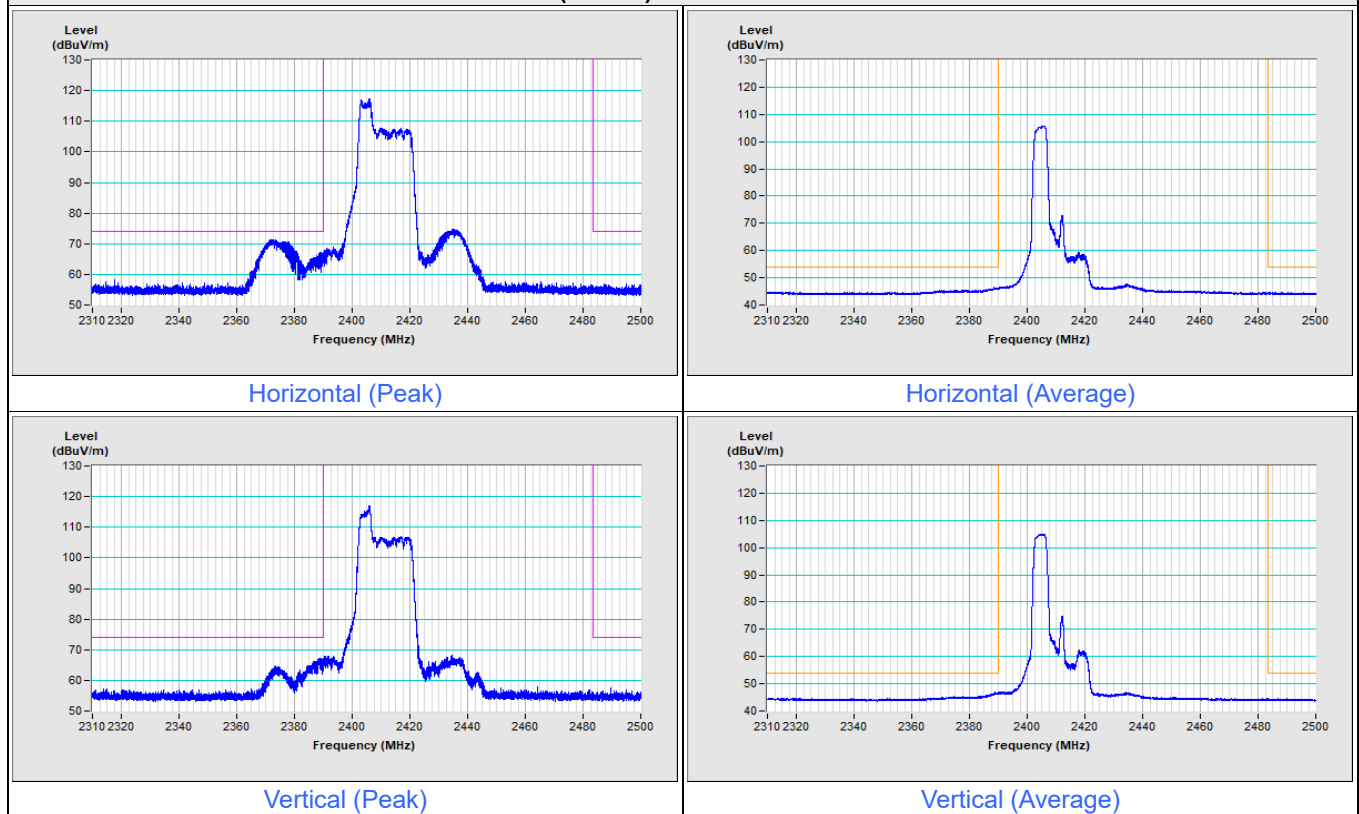


802.11be (EHT20) 52-tone RU Channel 2

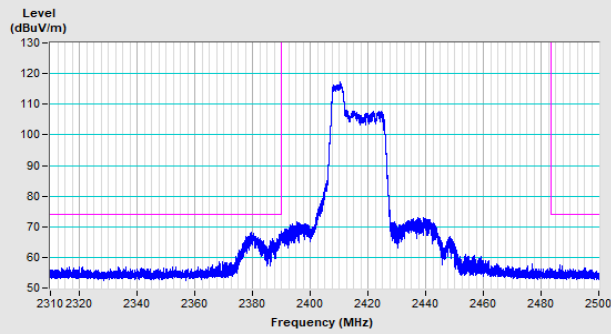


Horizontal (Peak)

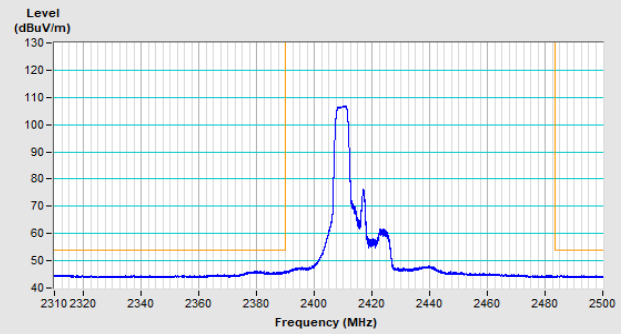

Horizontal (Average)

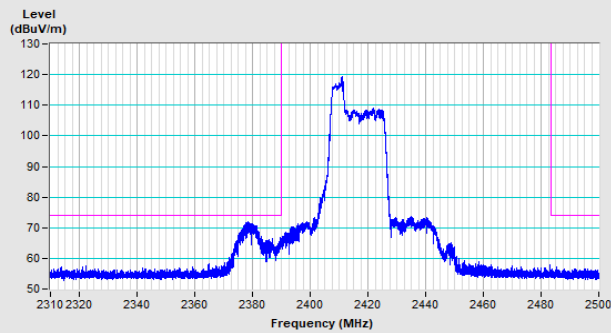


Vertical (Peak)

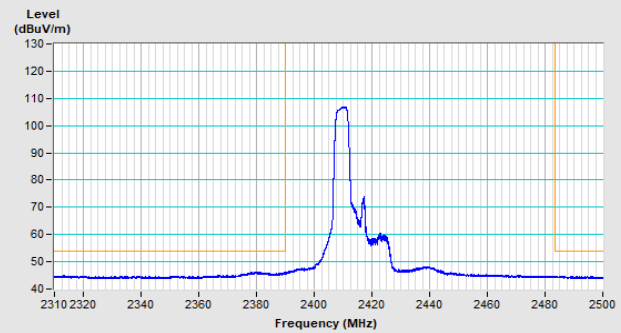


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 10

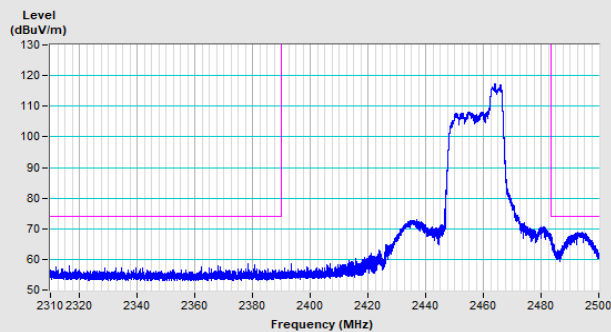


Horizontal (Peak)

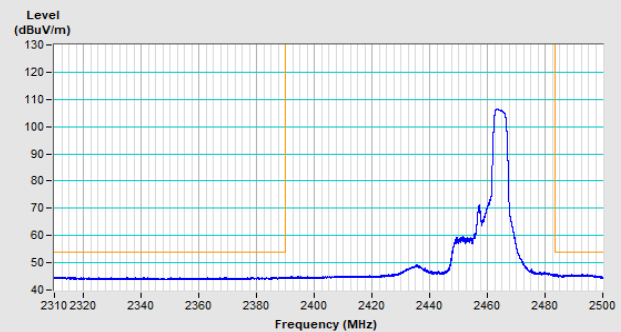

Horizontal (Average)

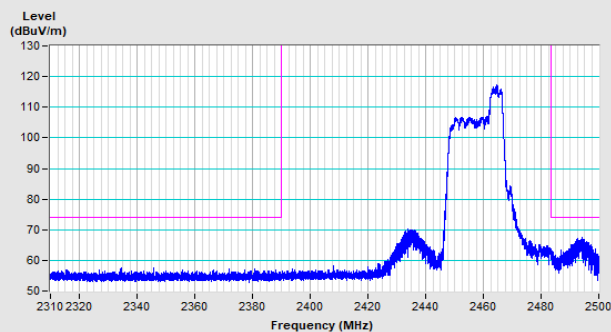


Vertical (Peak)

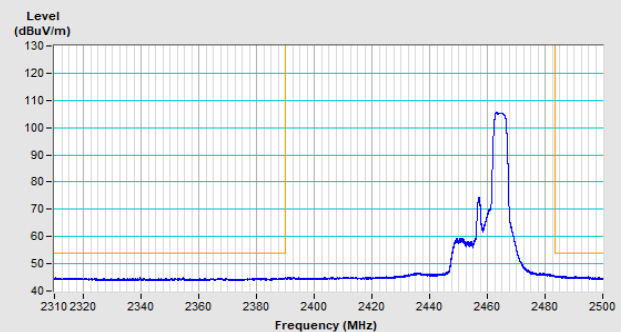


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 11

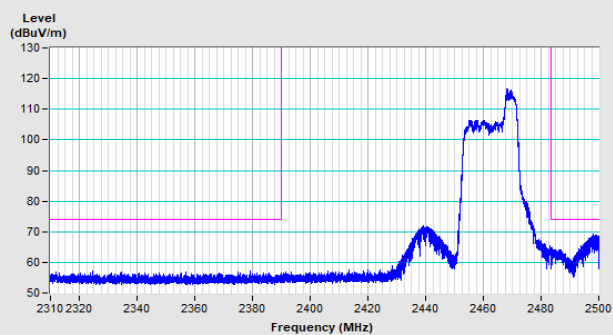


Horizontal (Peak)

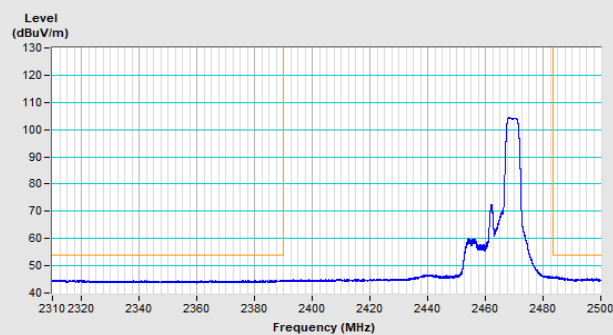

Horizontal (Average)

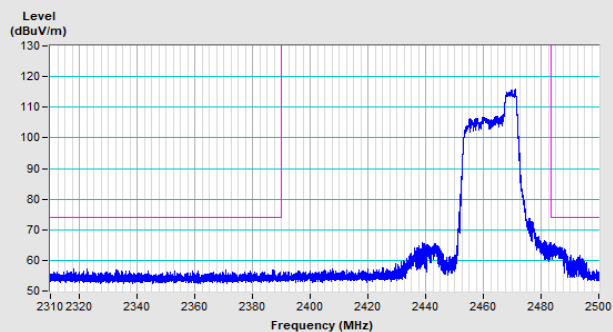


Vertical (Peak)

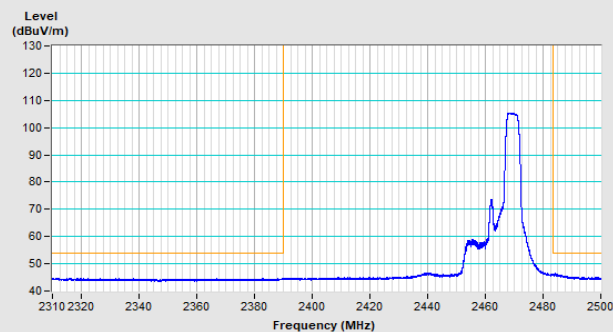


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

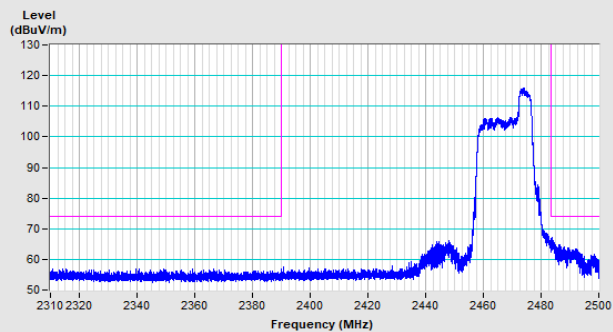


Horizontal (Peak)

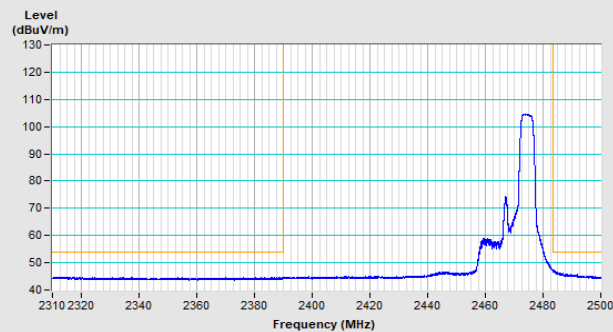

Horizontal (Average)

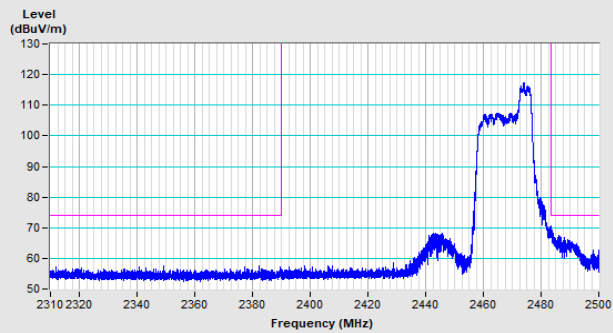


Vertical (Peak)

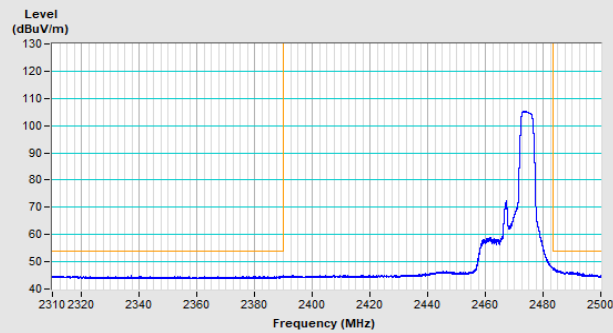


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

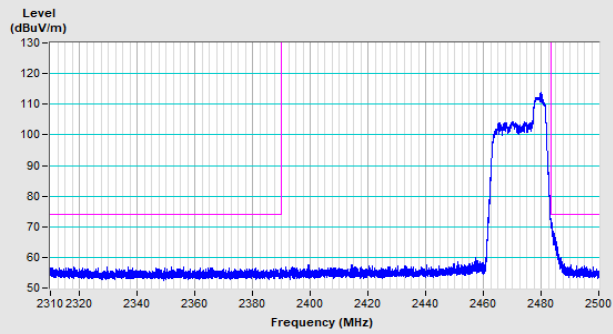


Horizontal (Peak)

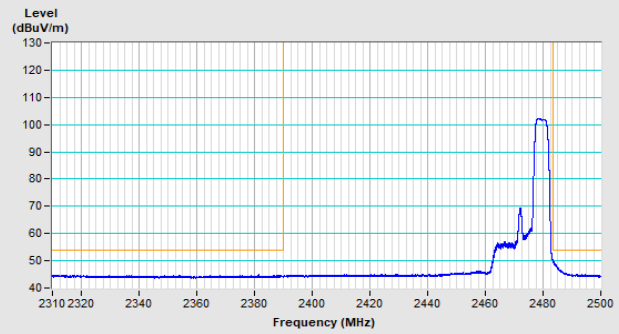

Horizontal (Average)

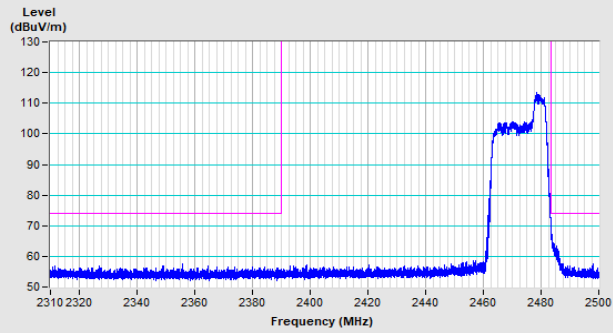


Vertical (Peak)

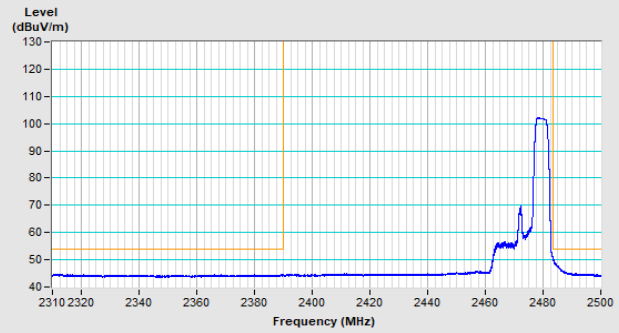


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

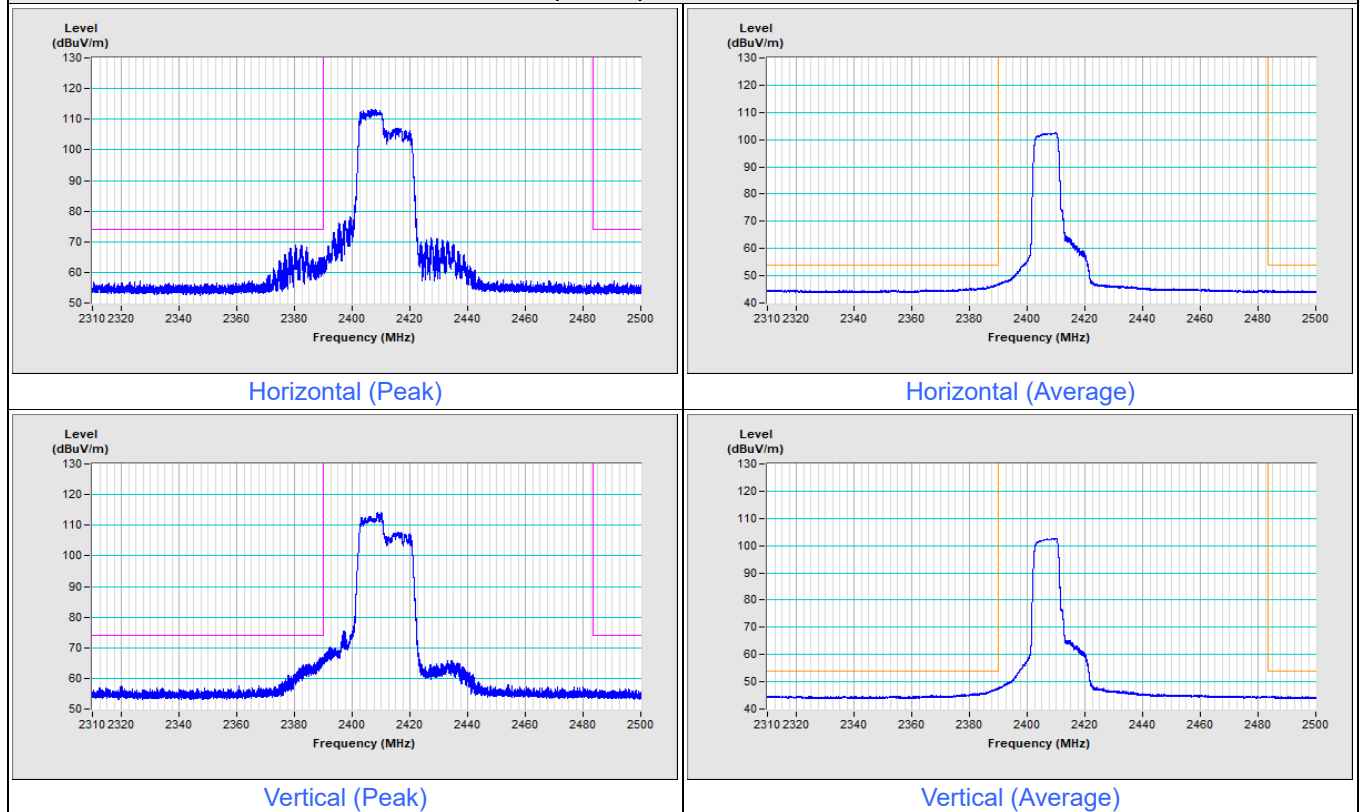


802.11be (EHT20) 106-tone RU Channel 2

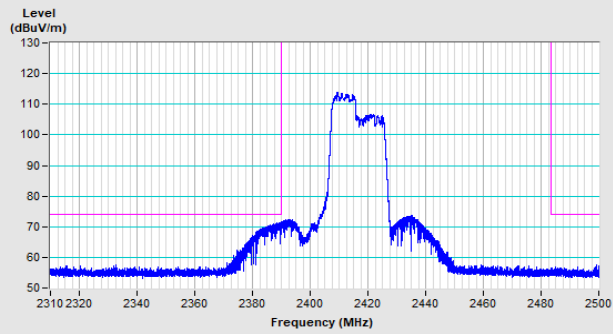


Horizontal (Peak)

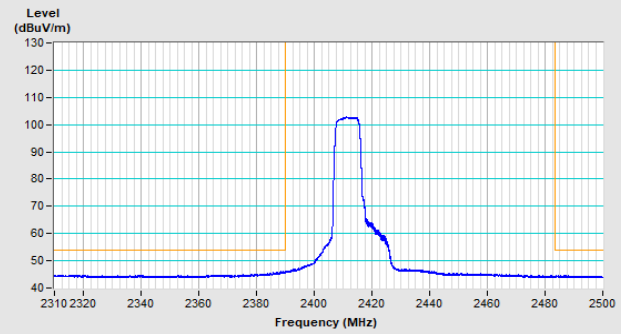

Horizontal (Average)

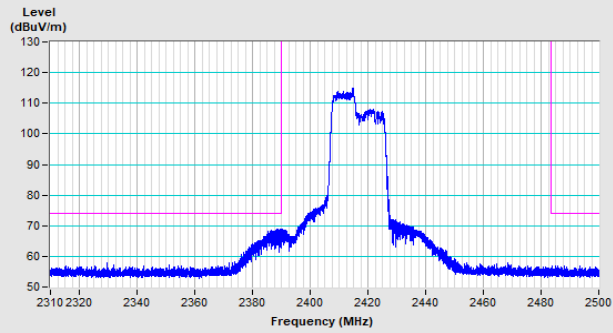


Vertical (Peak)

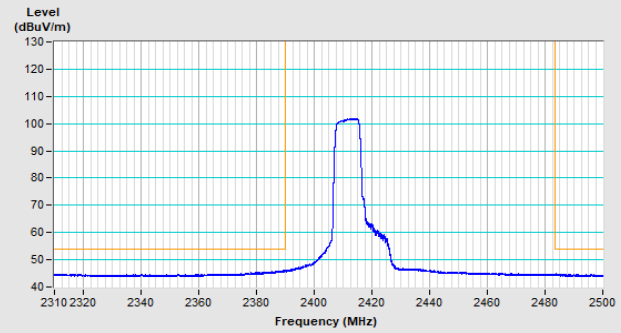


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 10

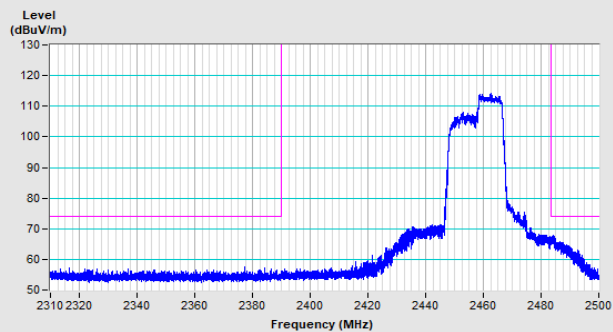


Horizontal (Peak)

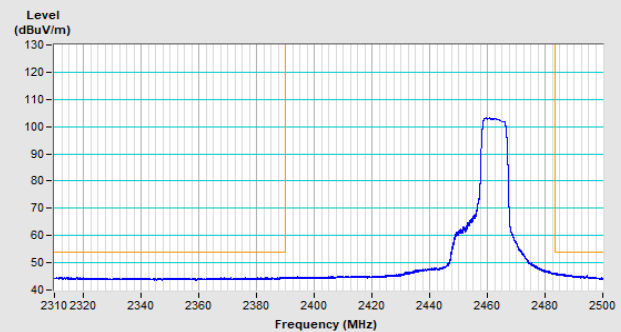

Horizontal (Average)

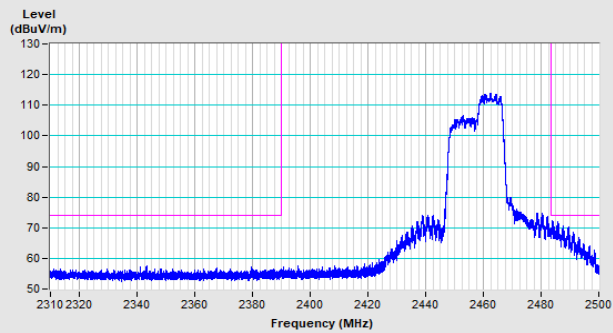


Vertical (Peak)

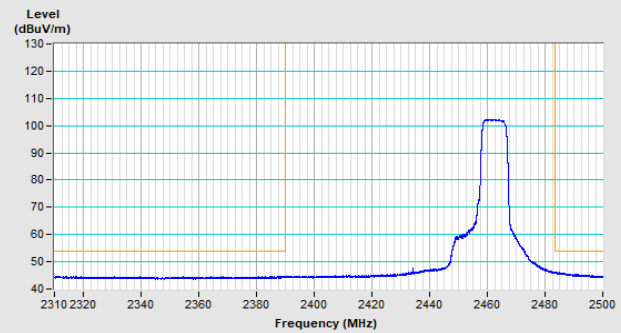


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 11

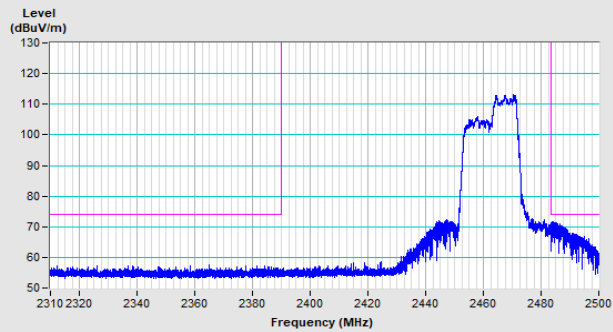


Horizontal (Peak)

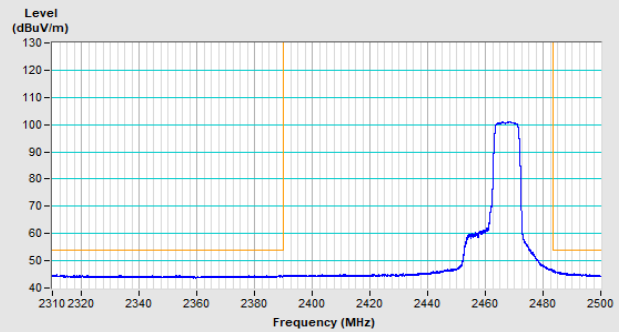

Horizontal (Average)

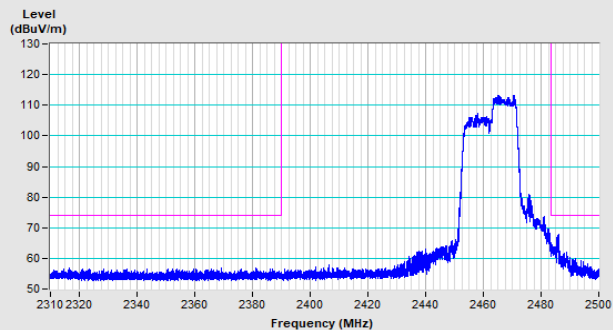


Vertical (Peak)

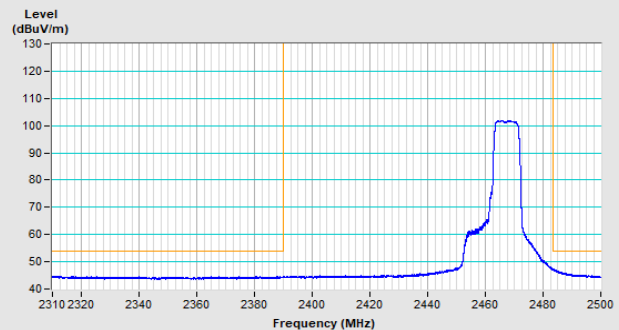


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

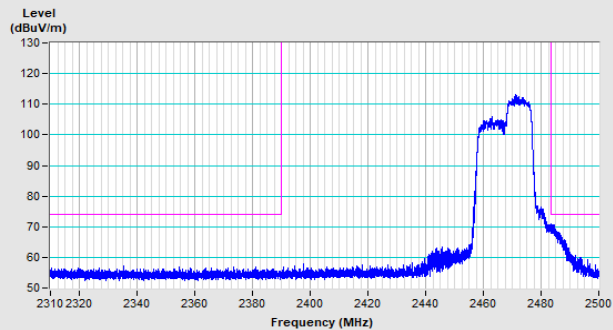


Horizontal (Peak)

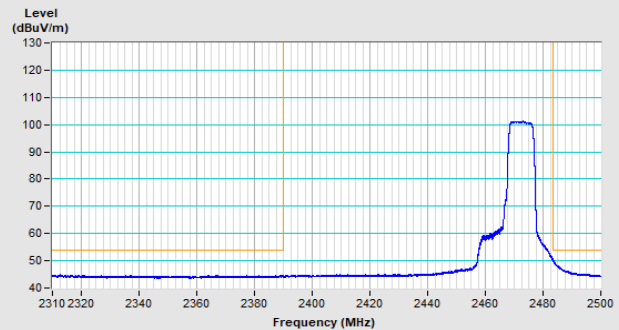

Horizontal (Average)

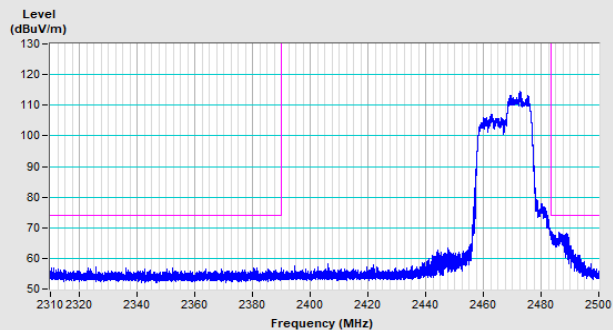


Vertical (Peak)

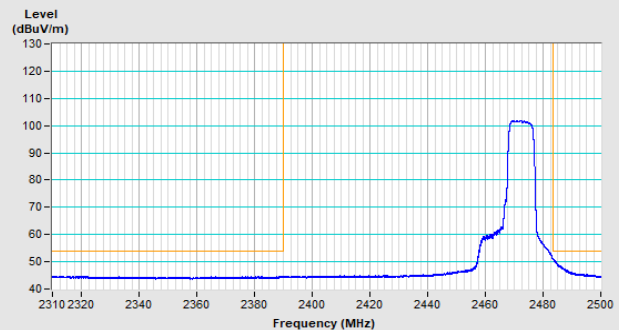


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

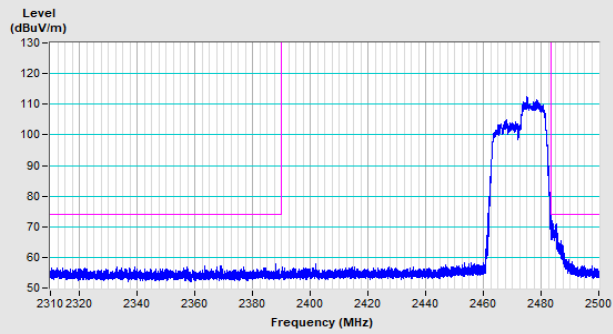


Horizontal (Peak)

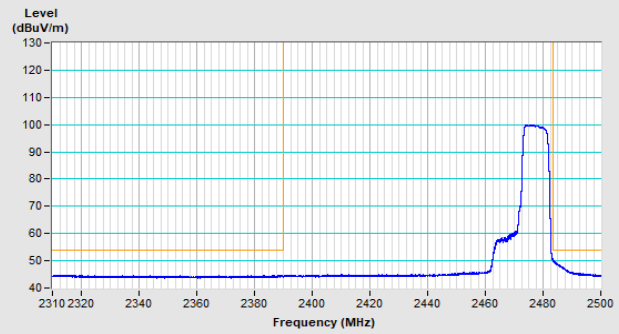

Horizontal (Average)

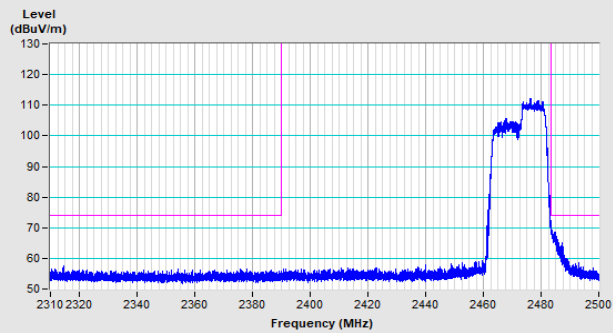


Vertical (Peak)

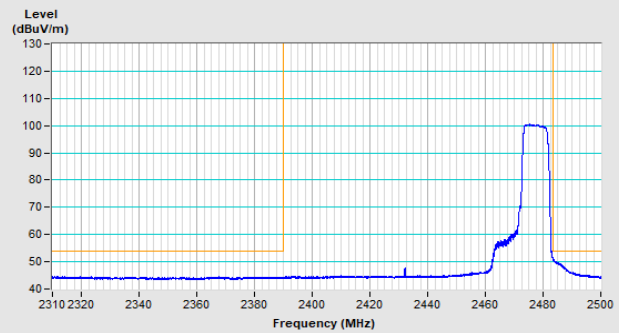


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

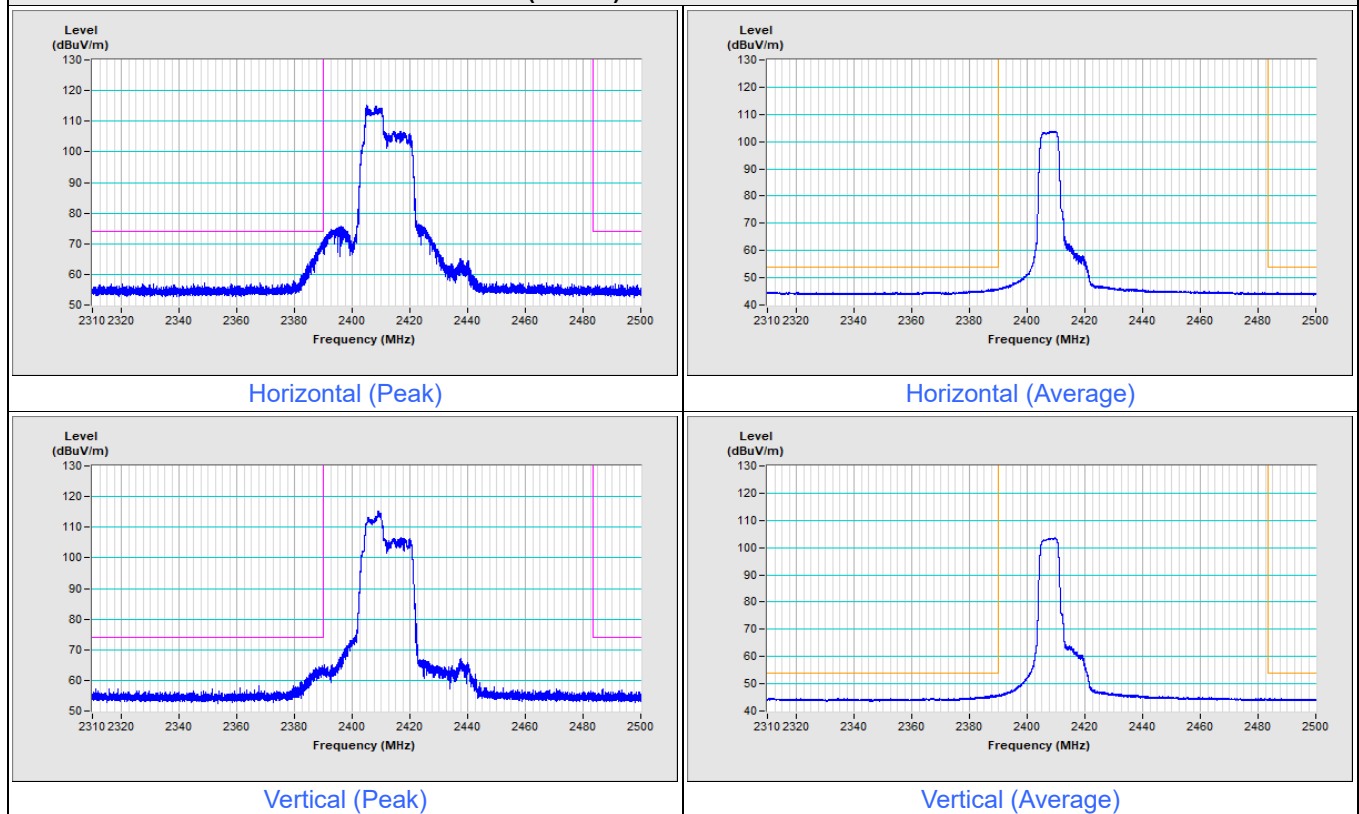


802.11be (EHT20) 52+26-tone MRU Channel 2

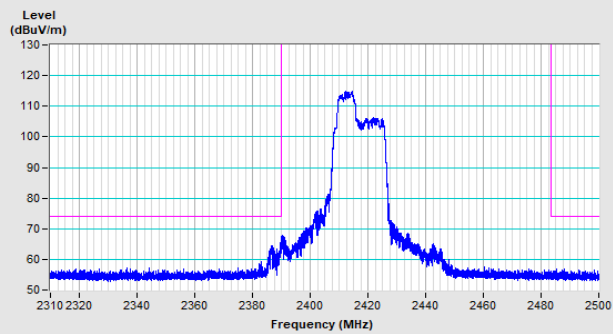


Horizontal (Peak)

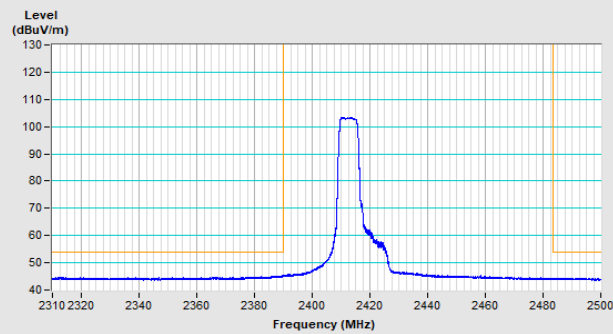

Horizontal (Average)

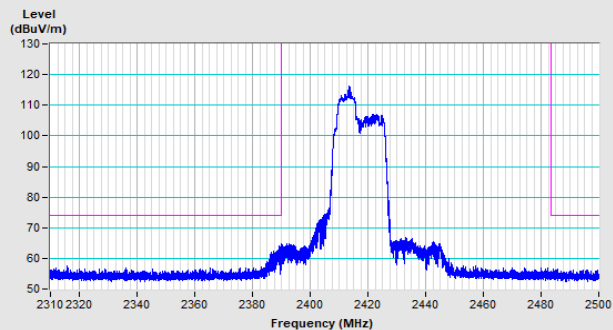


Vertical (Peak)

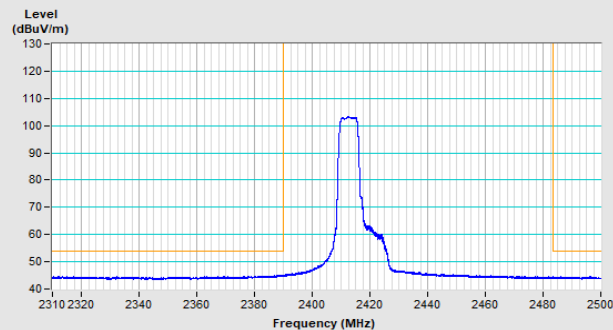


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 10

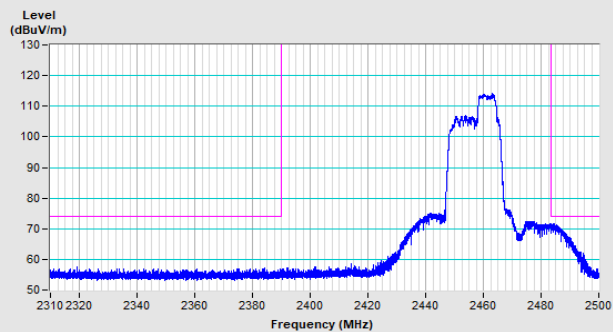


Horizontal (Peak)

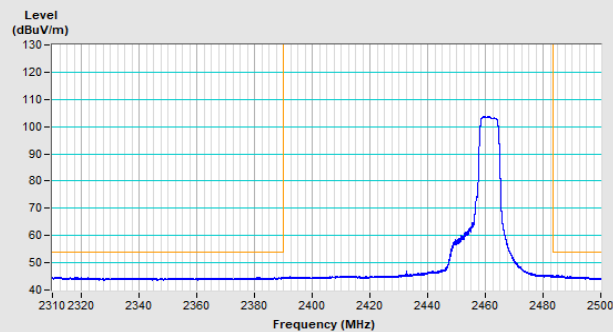

Horizontal (Average)

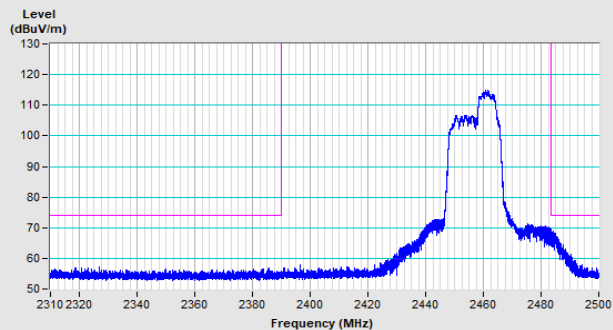


Vertical (Peak)

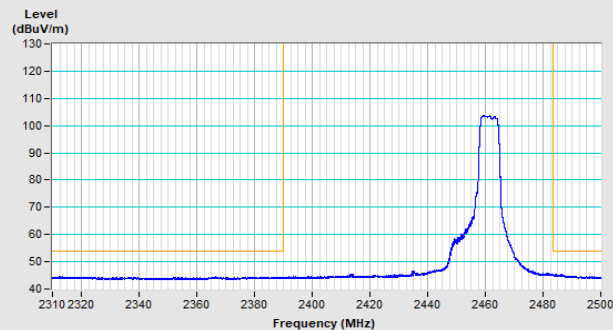


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 11

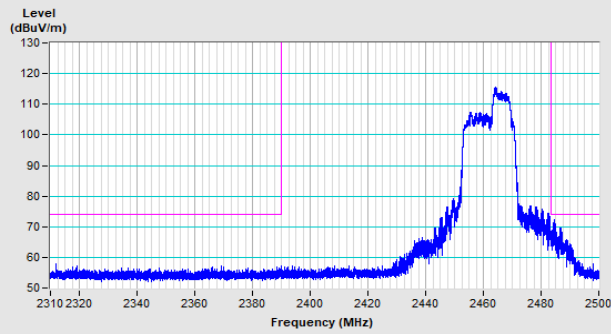


Horizontal (Peak)

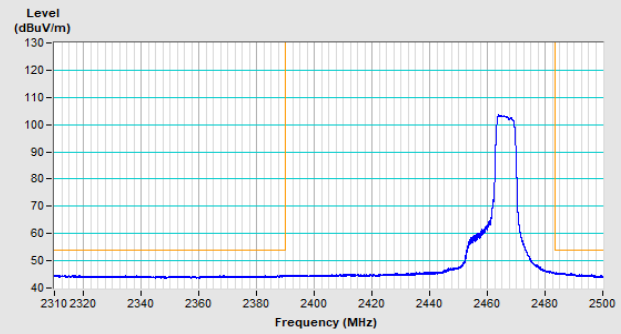

Horizontal (Average)

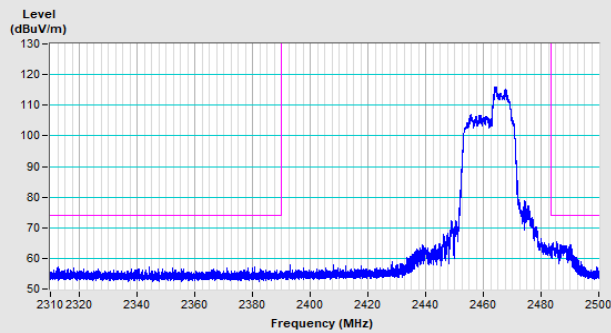


Vertical (Peak)

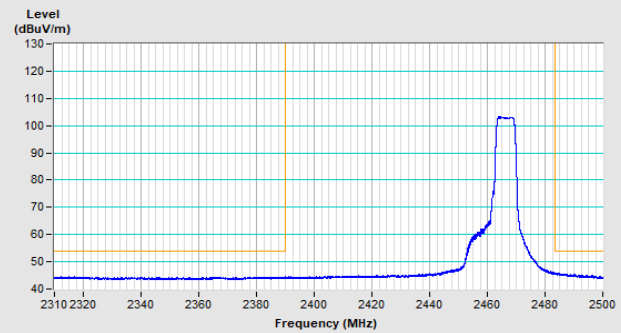


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 12

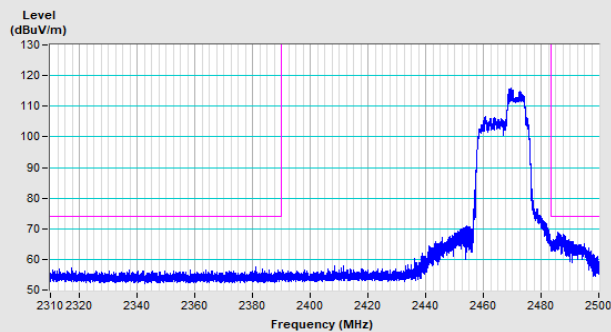


Horizontal (Peak)

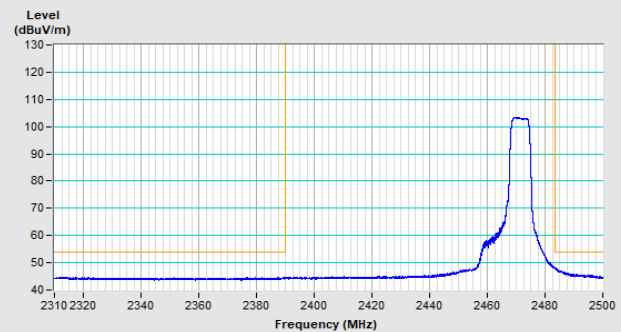


Horizontal (Average)

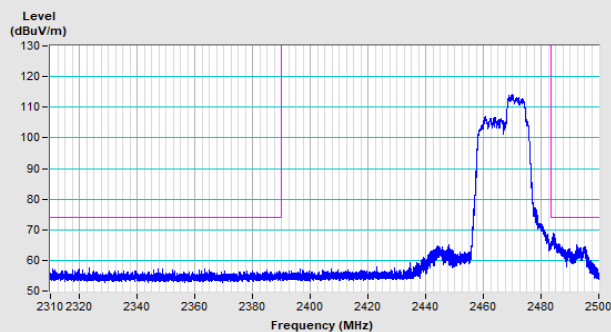


Vertical (Peak)

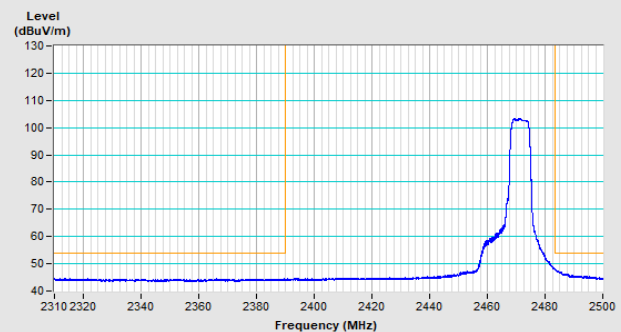


Vertical (Average)

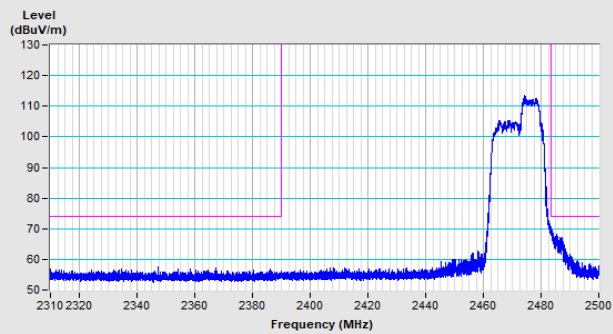802.11be (EHT20) 52+26-tone MRU Channel 13


Horizontal (Peak)

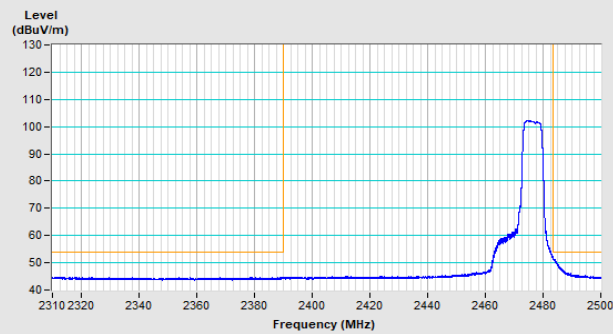

Horizontal (Average)

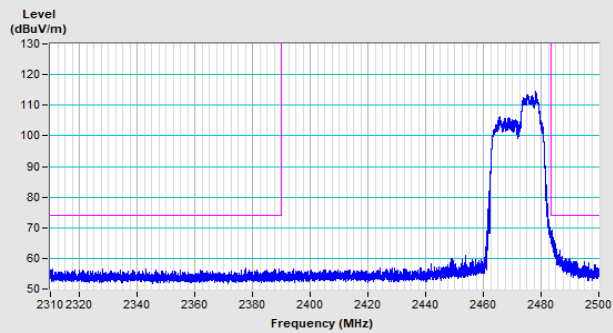


Vertical (Peak)

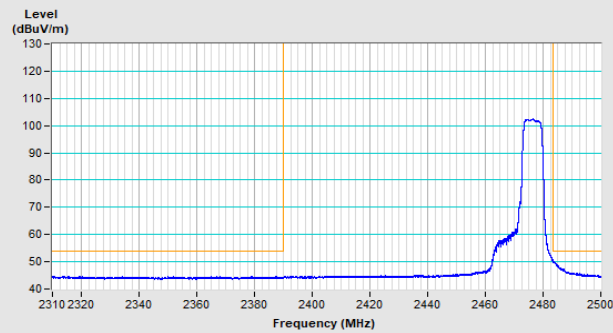


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

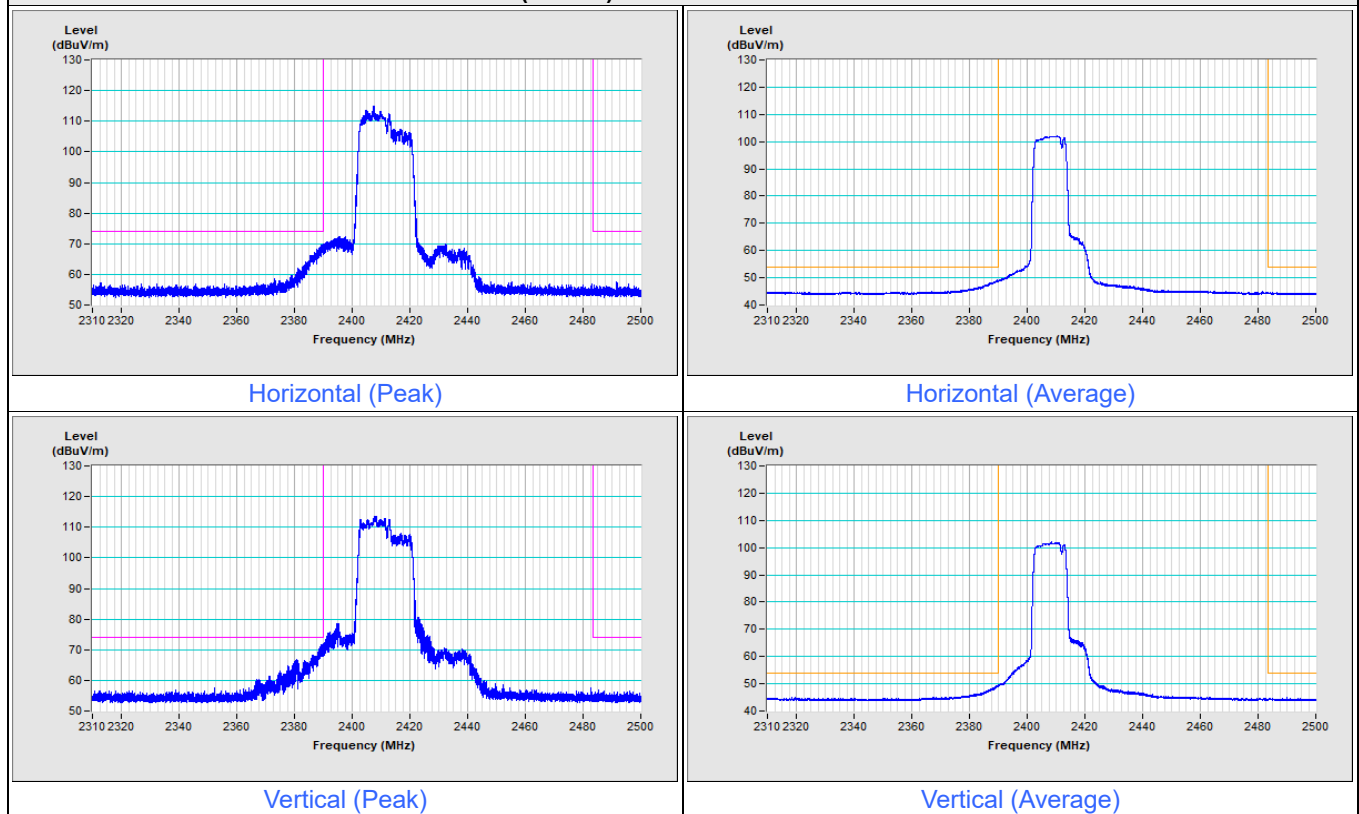


802.11be (EHT20) 106+26-tone MRU Channel 2

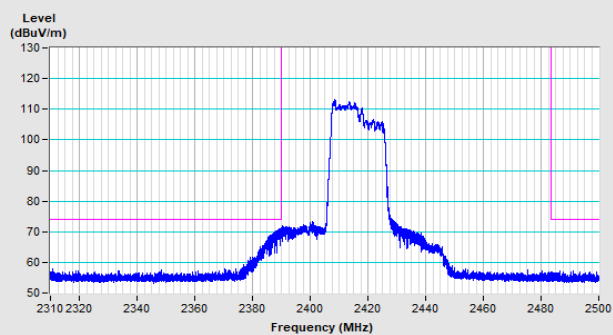


Horizontal (Peak)

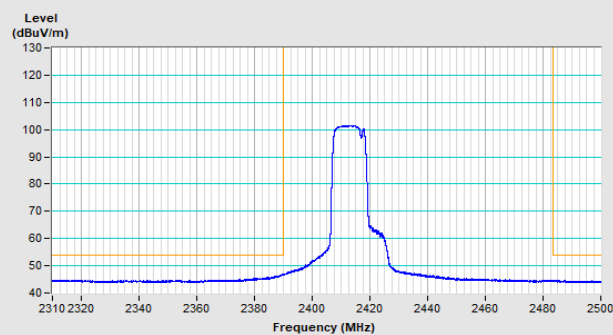

Horizontal (Average)

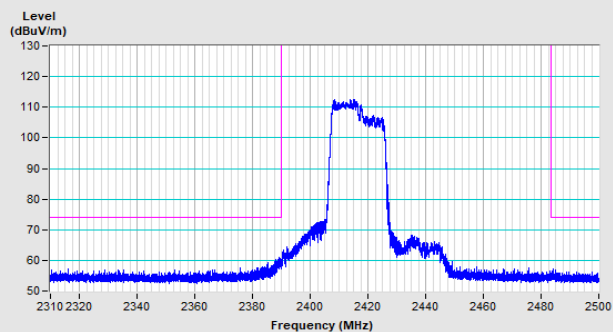


Vertical (Peak)

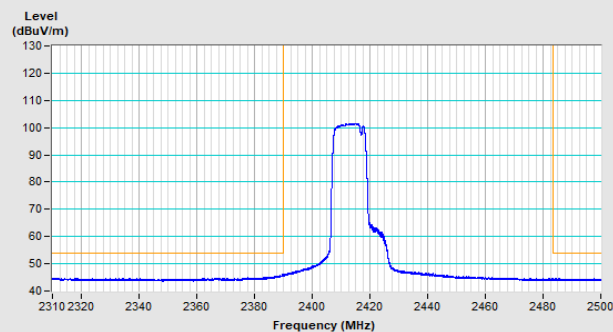


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 10

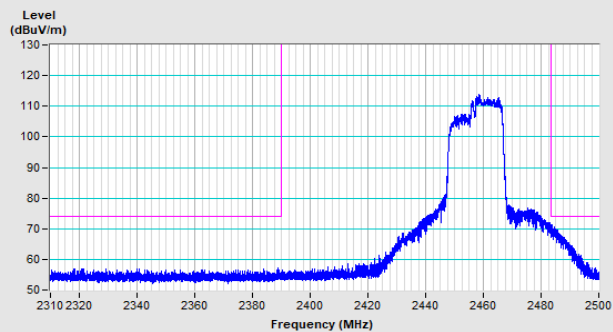


Horizontal (Peak)

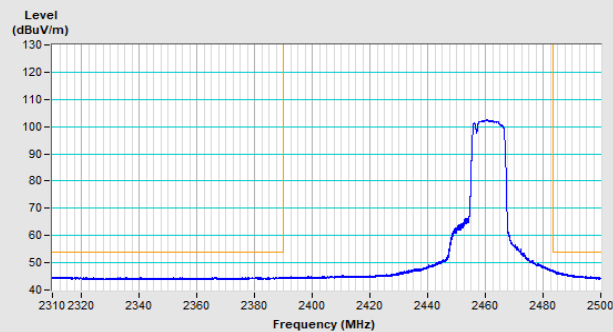

Horizontal (Average)

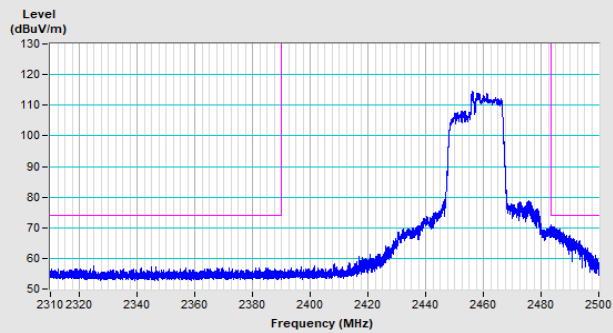


Vertical (Peak)

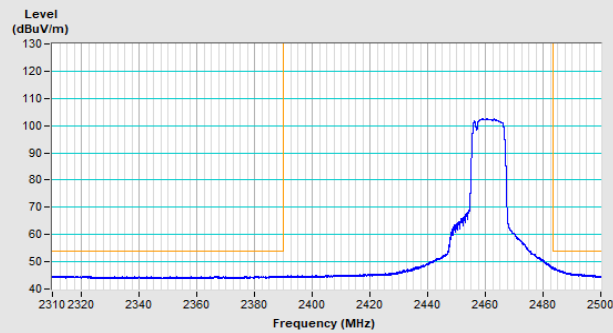


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 11

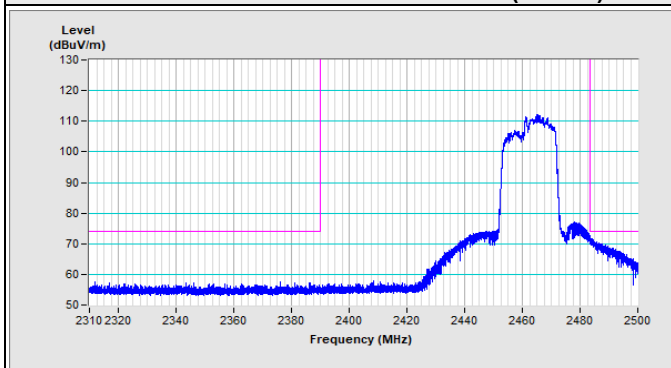


Horizontal (Peak)

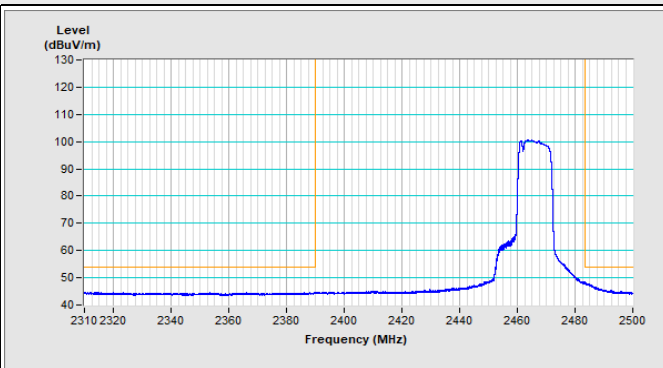

Horizontal (Average)

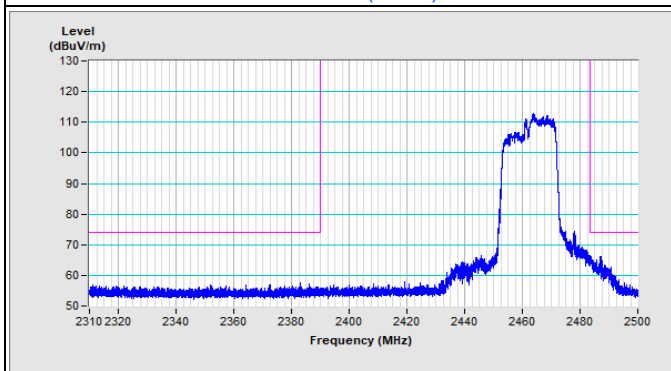


Vertical (Peak)

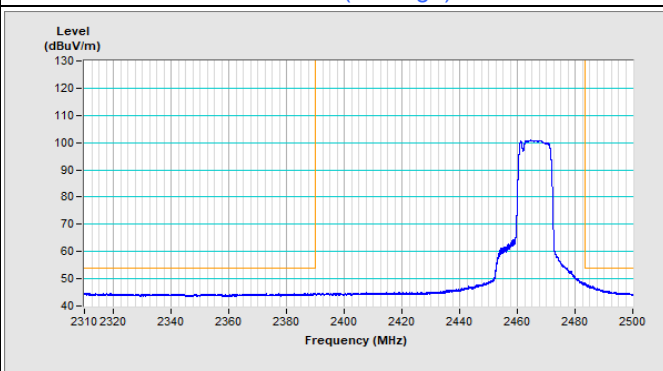


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 12

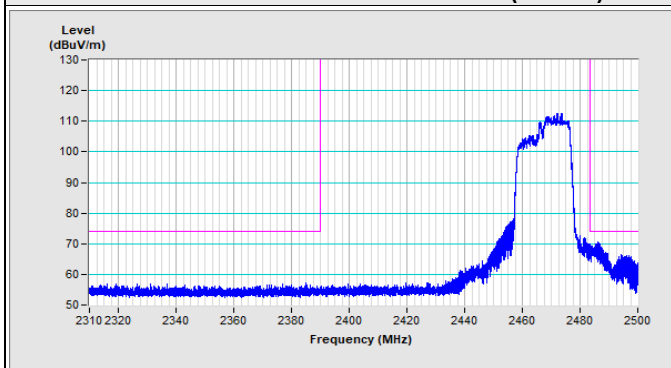


Horizontal (Peak)

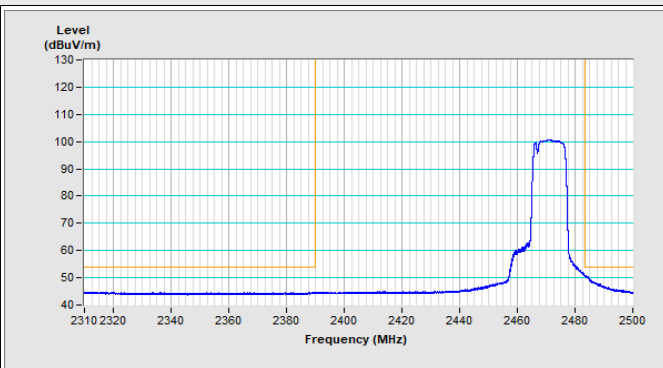

Horizontal (Average)

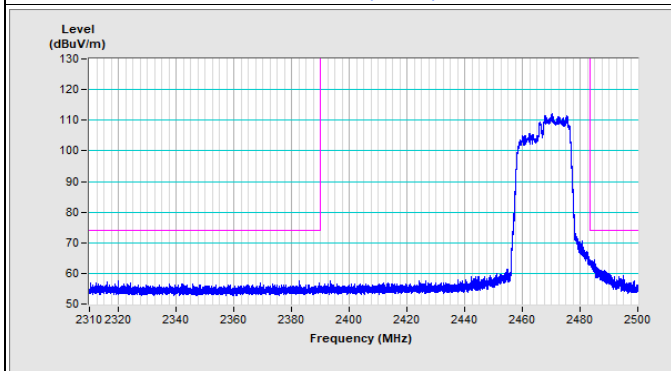


Vertical (Peak)

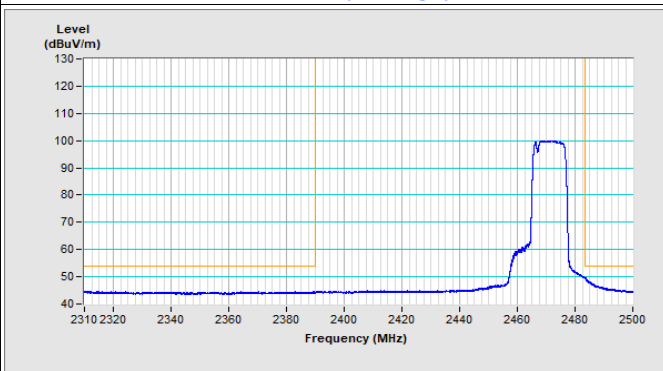


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 13

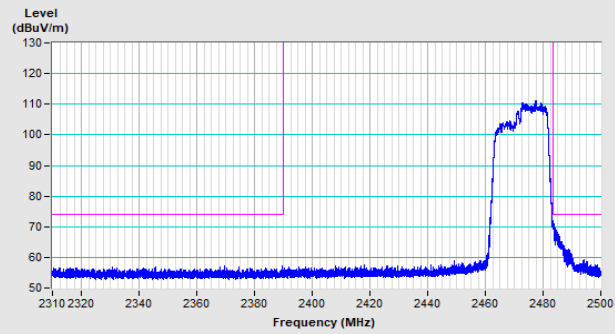


Horizontal (Peak)

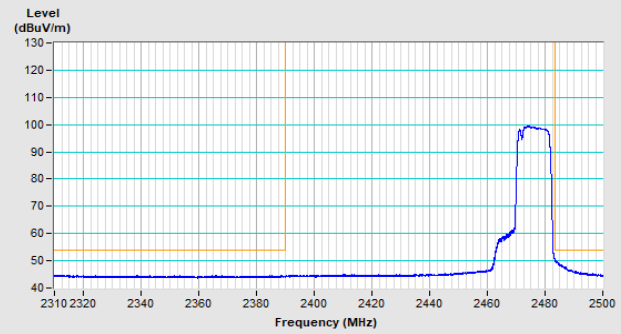

Horizontal (Average)

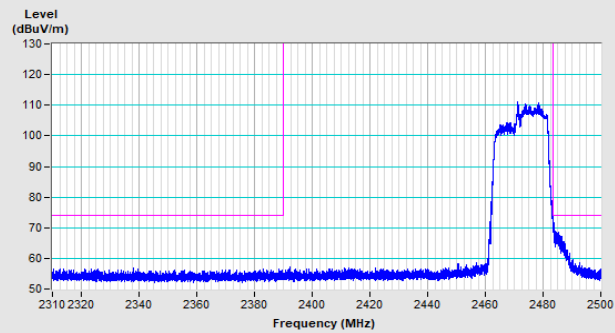

Vertical (Peak)

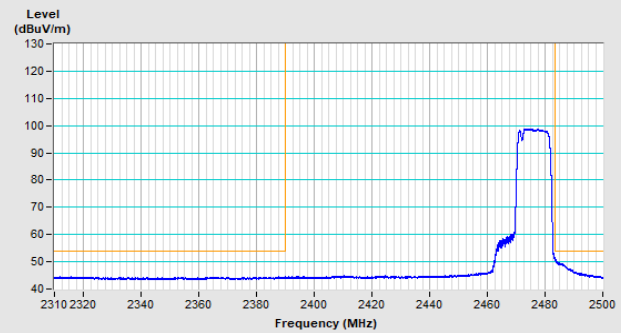

Vertical (Average)

Mode A
2Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.24 H	159	62.1	-2.0
2	2390.00	51.2 AV	54.0	-2.8	1.24 H	159	53.2	-2.0
3	*2412.00	114.3 PK			1.24 H	159	116.4	-2.1
4	*2412.00	112.4 AV			1.24 H	159	114.5	-2.1
5	4824.00	44.5 PK	74.0	-29.5	1.33 H	203	42.4	2.1
6	4824.00	42.2 AV	54.0	-11.8	1.33 H	203	40.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	2.54 V	183	61.3	-2.0
2	2390.00	49.3 AV	54.0	-4.7	2.54 V	183	51.3	-2.0
3	*2412.00	112.9 PK			2.54 V	183	115.0	-2.1
4	*2412.00	110.7 AV			2.54 V	183	112.8	-2.1
5	4824.00	48.5 PK	74.0	-25.5	2.55 V	78	46.4	2.1
6	4824.00	47.1 AV	54.0	-6.9	2.55 V	78	45.0	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.7 PK	74.0	-12.3	1.47 H	159	63.7	-2.0
2	2390.00	51.9 AV	54.0	-2.1	1.47 H	159	53.9	-2.0
3	*2417.00	115.1 PK			1.47 H	159	117.2	-2.1
4	*2417.00	112.9 AV			1.47 H	159	115.0	-2.1
5	4834.00	45.1 PK	74.0	-28.9	1.28 H	201	43.0	2.1
6	4834.00	42.6 AV	54.0	-11.4	1.28 H	201	40.5	2.1
7	7251.00	51.4 PK	74.0	-22.6	1.08 H	29	43.8	7.6
8	7251.00	47.8 AV	54.0	-6.2	1.08 H	29	40.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	2.74 V	198	60.8	-2.0
2	2390.00	47.4 AV	54.0	-6.6	2.74 V	198	49.4	-2.0
3	*2417.00	112.5 PK			2.74 V	198	114.6	-2.1
4	*2417.00	110.5 AV			2.74 V	198	112.6	-2.1
5	4834.00	49.0 PK	74.0	-25.0	2.59 V	73	46.9	2.1
6	4834.00	47.4 AV	54.0	-6.6	2.59 V	73	45.3	2.1
7	7251.00	53.1 PK	74.0	-20.9	1.46 V	122	45.5	7.6
8	7251.00	49.1 AV	54.0	-4.9	1.46 V	122	41.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	1.20 H	176	61.2	-2.0
2	2390.00	49.1 AV	54.0	-4.9	1.20 H	176	51.1	-2.0
3	*2437.00	116.5 PK			1.20 H	176	118.6	-2.1
4	*2437.00	113.9 AV			1.20 H	176	116.0	-2.1
5	2483.50	58.8 PK	74.0	-15.2	1.20 H	176	61.2	-2.4
6	2483.50	48.5 AV	54.0	-5.5	1.20 H	176	50.9	-2.4
7	4874.00	45.4 PK	74.0	-28.6	1.28 H	197	43.0	2.4
8	4874.00	43.0 AV	54.0	-11.0	1.28 H	197	40.6	2.4
9	7311.00	51.8 PK	74.0	-22.2	1.12 H	27	44.4	7.4
10	7311.00	48.1 AV	54.0	-5.9	1.12 H	27	40.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	2.50 V	186	59.2	-2.0
2	2390.00	46.2 AV	54.0	-7.8	2.50 V	186	48.2	-2.0
3	*2437.00	114.4 PK			2.50 V	186	116.5	-2.1
4	*2437.00	112.3 AV			2.50 V	186	114.4	-2.1
5	2483.50	57.4 PK	74.0	-16.6	2.50 V	186	59.8	-2.4
6	2483.50	46.7 AV	54.0	-7.3	2.50 V	186	49.1	-2.4
7	4874.00	49.5 PK	74.0	-24.5	2.56 V	82	47.1	2.4
8	4874.00	48.0 AV	54.0	-6.0	2.56 V	82	45.6	2.4
9	7311.00	53.2 PK	74.0	-20.8	1.41 V	142	45.8	7.4
10	7311.00	49.6 AV	54.0	-4.4	1.41 V	142	42.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	115.7 PK			1.20 H	157	118.1	-2.4
2	*2457.00	113.5 AV			1.20 H	157	115.9	-2.4
3	2483.50	62.4 PK	74.0	-11.6	1.20 H	157	64.8	-2.4
4	2483.50	52.2 AV	54.0	-1.8	1.20 H	157	54.6	-2.4
5	4914.00	45.3 PK	74.0	-28.7	1.31 H	194	42.8	2.5
6	4914.00	42.7 AV	54.0	-11.3	1.31 H	194	40.2	2.5
7	7371.00	50.9 PK	74.0	-23.1	1.03 H	23	43.3	7.6
8	7371.00	47.4 AV	54.0	-6.6	1.03 H	23	39.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.1 PK			1.93 V	183	116.5	-2.4
2	*2457.00	112.0 AV			1.93 V	183	114.4	-2.4
3	2483.50	60.2 PK	74.0	-13.8	1.93 V	183	62.6	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.93 V	183	52.7	-2.4
5	4914.00	48.9 PK	74.0	-25.1	2.56 V	74	46.4	2.5
6	4914.00	47.5 AV	54.0	-6.5	2.56 V	74	45.0	2.5
7	7371.00	52.8 PK	74.0	-21.2	1.44 V	137	45.2	7.6
8	7371.00	49.1 AV	54.0	-4.9	1.44 V	137	41.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.2 PK			1.15 H	163	118.6	-2.4
2	*2462.00	112.9 AV			1.15 H	163	115.3	-2.4
3	2483.50	64.1 PK	74.0	-9.9	1.15 H	163	66.5	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.15 H	163	54.7	-2.4
5	4924.00	45.8 PK	74.0	-28.2	1.29 H	190	43.3	2.5
6	4924.00	42.0 AV	54.0	-12.0	1.29 H	190	39.5	2.5
7	7386.00	50.6 PK	74.0	-23.4	1.02 H	10	42.9	7.7
8	7386.00	47.0 AV	54.0	-7.0	1.02 H	10	39.3	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.8 PK			2.00 V	183	116.2	-2.4
2	*2462.00	111.6 AV			2.00 V	183	114.0	-2.4
3	2483.50	60.3 PK	74.0	-13.7	2.00 V	183	62.7	-2.4
4	2483.50	48.4 AV	54.0	-5.6	2.00 V	183	50.8	-2.4
5	4924.00	49.0 PK	74.0	-25.0	2.61 V	89	46.5	2.5
6	4924.00	47.3 AV	54.0	-6.7	2.61 V	89	44.8	2.5
7	7386.00	52.6 PK	74.0	-21.4	1.44 V	129	44.9	7.7
8	7386.00	48.9 AV	54.0	-5.1	1.44 V	129	41.2	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.6 PK			1.21 H	162	111.0	-2.4
2	*2467.00	105.2 AV			1.21 H	162	107.6	-2.4
3	2483.50	60.9 PK	74.0	-13.1	1.21 H	162	63.3	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.21 H	162	54.8	-2.4
5	4934.00	45.4 PK	74.0	-28.6	1.34 H	200	43.0	2.4
6	4934.00	41.6 AV	54.0	-12.4	1.34 H	200	39.2	2.4
7	7401.00	50.3 PK	74.0	-23.7	1.06 H	8	42.4	7.9
8	7401.00	46.6 AV	54.0	-7.4	1.06 H	8	38.7	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.6 PK			2.00 V	195	111.0	-2.4
2	*2467.00	105.6 AV			2.00 V	195	108.0	-2.4
3	2483.50	60.6 PK	74.0	-13.4	2.00 V	195	63.0	-2.4
4	2483.50	52.4 AV	54.0	-1.6	2.00 V	195	54.8	-2.4
5	4934.00	49.3 PK	74.0	-24.7	2.59 V	78	46.9	2.4
6	4934.00	47.3 AV	54.0	-6.7	2.59 V	78	44.9	2.4
7	7401.00	52.1 PK	74.0	-21.9	1.49 V	141	44.2	7.9
8	7401.00	48.4 AV	54.0	-5.6	1.49 V	141	40.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.5 PK			1.12 H	6	106.9	-2.4
2	*2472.00	102.3 AV			1.12 H	6	104.7	-2.4
3	2483.50	60.3 PK	74.0	-13.7	1.12 H	6	62.7	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.12 H	6	54.3	-2.4
5	4944.00	44.8 PK	74.0	-29.2	1.38 H	200	42.4	2.4
6	4944.00	41.2 AV	54.0	-12.8	1.38 H	200	38.8	2.4
7	7416.00	49.9 PK	74.0	-24.1	1.12 H	5	41.9	8.0
8	7416.00	46.3 AV	54.0	-7.7	1.12 H	5	38.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.2 PK			1.95 V	183	107.6	-2.4
2	*2472.00	103.0 AV			1.95 V	183	105.4	-2.4
3	2483.50	59.1 PK	74.0	-14.9	1.95 V	183	61.5	-2.4
4	2483.50	50.9 AV	54.0	-3.1	1.95 V	183	53.3	-2.4
5	4944.00	49.0 PK	74.0	-25.0	2.64 V	89	46.6	2.4
6	4944.00	47.1 AV	54.0	-6.9	2.64 V	89	44.7	2.4
7	7416.00	52.1 PK	74.0	-21.9	1.50 V	144	44.1	8.0
8	7416.00	48.5 AV	54.0	-5.5	1.50 V	144	40.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.21 H	163	65.5	-2.0
2	2390.00	50.6 AV	54.0	-3.4	1.21 H	163	52.6	-2.0
3	*2412.00	114.1 PK			1.21 H	163	116.2	-2.1
4	*2412.00	105.1 AV			1.21 H	163	107.2	-2.1
5	4824.00	43.2 PK	74.0	-30.8	1.24 H	331	41.1	2.1
6	4824.00	31.6 AV	54.0	-22.4	1.24 H	331	29.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.83 V	195	60.6	-2.0
2	2390.00	46.6 AV	54.0	-7.4	1.83 V	195	48.6	-2.0
3	*2412.00	112.4 PK			1.83 V	195	114.5	-2.1
4	*2412.00	98.5 AV			1.83 V	195	100.6	-2.1
5	4824.00	44.5 PK	74.0	-29.5	2.49 V	96	42.4	2.1
6	4824.00	33.2 AV	54.0	-20.8	2.49 V	96	31.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.24 H	200	71.2	-2.0
2	2390.00	51.7 AV	54.0	-2.3	1.24 H	200	53.7	-2.0
3	*2417.00	116.2 PK			1.24 H	200	118.3	-2.1
4	*2417.00	105.6 AV			1.24 H	200	107.7	-2.1
5	4834.00	43.8 PK	74.0	-30.2	1.23 H	339	41.7	2.1
6	4834.00	31.9 AV	54.0	-22.1	1.23 H	339	29.8	2.1
7	7251.00	53.7 PK	74.0	-20.3	1.09 H	44	46.1	7.6
8	7251.00	40.9 AV	54.0	-13.1	1.09 H	44	33.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	2.83 V	208	72.1	-2.0
2	2390.00	52.4 AV	54.0	-1.6	2.83 V	208	54.4	-2.0
3	*2417.00	113.1 PK			2.83 V	208	115.2	-2.1
4	*2417.00	105.2 AV			2.83 V	208	107.3	-2.1
5	4834.00	44.6 PK	74.0	-29.4	2.54 V	82	42.5	2.1
6	4834.00	33.1 AV	54.0	-20.9	2.54 V	82	31.0	2.1
7	7251.00	57.4 PK	74.0	-16.6	1.42 V	133	49.8	7.6
8	7251.00	41.7 AV	54.0	-12.3	1.42 V	133	34.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	1.64 H	164	68.8	-2.0
2	2390.00	50.4 AV	54.0	-3.6	1.64 H	164	52.4	-2.0
3	*2437.00	116.9 PK			1.64 H	164	119.0	-2.1
4	*2437.00	108.2 AV			1.64 H	164	110.3	-2.1
5	2483.50	67.9 PK	74.0	-6.1	1.64 H	164	70.3	-2.4
6	2483.50	49.2 AV	54.0	-4.8	1.64 H	164	51.6	-2.4
7	4874.00	43.7 PK	74.0	-30.3	1.23 H	341	41.3	2.4
8	4874.00	32.0 AV	54.0	-22.0	1.23 H	341	29.6	2.4
9	7311.00	54.1 PK	74.0	-19.9	1.13 H	34	46.7	7.4
10	7311.00	41.0 AV	54.0	-13.0	1.13 H	34	33.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.1 PK	74.0	-8.9	2.79 V	199	67.1	-2.0
2	2390.00	48.4 AV	54.0	-5.6	2.79 V	199	50.4	-2.0
3	*2437.00	116.0 PK			2.79 V	199	118.1	-2.1
4	*2437.00	106.4 AV			2.79 V	199	108.5	-2.1
5	2483.50	68.8 PK	74.0	-5.2	2.79 V	199	71.2	-2.4
6	2483.50	48.7 AV	54.0	-5.3	2.79 V	199	51.1	-2.4
7	4874.00	44.9 PK	74.0	-29.1	2.54 V	95	42.5	2.4
8	4874.00	33.6 AV	54.0	-20.4	2.54 V	95	31.2	2.4
9	7311.00	57.0 PK	74.0	-17.0	1.40 V	136	49.6	7.4
10	7311.00	42.5 AV	54.0	-11.5	1.40 V	136	35.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.2 PK			1.55 H	164	116.6	-2.4
2	*2457.00	105.2 AV			1.55 H	164	107.6	-2.4
3	2483.50	67.2 PK	74.0	-6.8	1.55 H	164	69.6	-2.4
4	2483.50	50.5 AV	54.0	-3.5	1.55 H	164	52.9	-2.4
5	4914.00	43.6 PK	74.0	-30.4	1.21 H	349	41.1	2.5
6	4914.00	31.6 AV	54.0	-22.4	1.21 H	349	29.1	2.5
7	7371.00	53.7 PK	74.0	-20.3	1.11 H	35	46.1	7.6
8	7371.00	40.6 AV	54.0	-13.4	1.11 H	35	33.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.2 PK			1.98 V	198	115.6	-2.4
2	*2457.00	104.9 AV			1.98 V	198	107.3	-2.4
3	2483.50	68.5 PK	74.0	-5.5	1.98 V	198	70.9	-2.4
4	2483.50	51.7 AV	54.0	-2.3	1.98 V	198	54.1	-2.4
5	4914.00	44.4 PK	74.0	-29.6	2.55 V	67	41.9	2.5
6	4914.00	32.9 AV	54.0	-21.1	2.55 V	67	30.4	2.5
7	7371.00	57.3 PK	74.0	-16.7	1.41 V	129	49.7	7.6
8	7371.00	41.5 AV	54.0	-12.5	1.41 V	129	33.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.5 PK			1.58 H	165	115.9	-2.4
2	*2462.00	104.8 AV			1.58 H	165	107.2	-2.4
3	2483.50	67.6 PK	74.0	-6.4	1.58 H	165	70.0	-2.4
4	2483.50	50.7 AV	54.0	-3.3	1.58 H	165	53.1	-2.4
5	4924.00	43.0 PK	74.0	-31.0	1.23 H	355	40.5	2.5
6	4924.00	31.1 AV	54.0	-22.9	1.23 H	355	28.6	2.5
7	7386.00	53.6 PK	74.0	-20.4	1.11 H	48	45.9	7.7
8	7386.00	40.5 AV	54.0	-13.5	1.11 H	48	32.8	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.0 PK			2.14 V	182	116.4	-2.4
2	*2462.00	104.3 AV			2.14 V	182	106.7	-2.4
3	2483.50	63.0 PK	74.0	-11.0	2.14 V	182	65.4	-2.4
4	2483.50	49.9 AV	54.0	-4.1	2.14 V	182	52.3	-2.4
5	4924.00	44.0 PK	74.0	-30.0	2.60 V	61	41.5	2.5
6	4924.00	32.5 AV	54.0	-21.5	2.60 V	61	30.0	2.5
7	7386.00	57.4 PK	74.0	-16.6	1.35 V	114	49.7	7.7
8	7386.00	41.0 AV	54.0	-13.0	1.35 V	114	33.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.8 PK			1.27 H	203	116.2	-2.4
2	*2467.00	104.5 AV			1.27 H	203	106.9	-2.4
3	2483.50	65.7 PK	74.0	-8.3	1.27 H	203	68.1	-2.4
4	2483.50	52.2 AV	54.0	-1.8	1.27 H	203	54.6	-2.4
5	4934.00	43.0 PK	74.0	-31.0	1.21 H	359	40.6	2.4
6	4934.00	31.0 AV	54.0	-23.0	1.21 H	359	28.6	2.4
7	7401.00	54.2 PK	74.0	-19.8	1.17 H	40	46.3	7.9
8	7401.00	40.0 AV	54.0	-14.0	1.17 H	40	32.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.1 PK			2.33 V	197	114.5	-2.4
2	*2467.00	103.6 AV			2.33 V	197	106.0	-2.4
3	2483.50	65.0 PK	74.0	-9.0	2.33 V	197	67.4	-2.4
4	2483.50	52.0 AV	54.0	-2.0	2.33 V	197	54.4	-2.4
5	4934.00	43.7 PK	74.0	-30.3	2.63 V	60	41.3	2.4
6	4934.00	32.1 AV	54.0	-21.9	2.63 V	60	29.7	2.4
7	7401.00	57.1 PK	74.0	-16.9	1.40 V	98	49.2	7.9
8	7401.00	40.8 AV	54.0	-13.2	1.40 V	98	32.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.2 PK			1.37 H	164	114.6	-2.4
2	*2472.00	102.6 AV			1.37 H	164	105.0	-2.4
3	2483.50	67.4 PK	74.0	-6.6	1.37 H	164	69.8	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.37 H	164	54.8	-2.4
5	4944.00	43.1 PK	74.0	-30.9	1.25 H	360	40.7	2.4
6	4944.00	30.9 AV	54.0	-23.1	1.25 H	360	28.5	2.4
7	7416.00	53.8 PK	74.0	-20.2	1.12 H	53	45.8	8.0
8	7416.00	40.6 AV	54.0	-13.4	1.12 H	53	32.6	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.5 PK			1.98 V	180	113.9	-2.4
2	*2472.00	102.7 AV			1.98 V	180	105.1	-2.4
3	2483.50	68.5 PK	74.0	-5.5	1.98 V	180	70.9	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.98 V	180	54.7	-2.4
5	4944.00	43.6 PK	74.0	-30.4	2.62 V	51	41.2	2.4
6	4944.00	31.8 AV	54.0	-22.2	2.62 V	51	29.4	2.4
7	7416.00	56.5 PK	74.0	-17.5	1.44 V	112	48.5	8.0
8	7416.00	40.3 AV	54.0	-13.7	1.44 V	112	32.3	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.46 H	161	70.1	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.46 H	161	54.3	-2.0
3	*2412.00	115.1 PK			1.46 H	161	117.2	-2.1
4	*2412.00	104.7 AV			1.46 H	161	106.8	-2.1
5	4824.00	43.7 PK	74.0	-30.3	1.58 H	344	41.6	2.1
6	4824.00	33.0 AV	54.0	-21.0	1.58 H	344	30.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	2.07 V	197	66.1	-2.0
2	2390.00	51.9 AV	54.0	-2.1	2.07 V	197	53.9	-2.0
3	*2412.00	115.8 PK			2.07 V	197	117.9	-2.1
4	*2412.00	103.7 AV			2.07 V	197	105.8	-2.1
5	4824.00	45.3 PK	74.0	-28.7	1.08 V	127	43.2	2.1
6	4824.00	34.8 AV	54.0	-19.2	1.08 V	127	32.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.6 PK	74.0	-8.4	1.17 H	160	67.6	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.17 H	160	54.4	-2.0
3	*2417.00	116.2 PK			1.17 H	160	118.3	-2.1
4	*2417.00	106.3 AV			1.17 H	160	108.4	-2.1
5	4834.00	43.8 PK	74.0	-30.2	1.55 H	335	41.7	2.1
6	4834.00	33.3 AV	54.0	-20.7	1.55 H	335	31.2	2.1
7	7251.00	49.6 PK	74.0	-24.4	1.25 H	84	42.0	7.6
8	7251.00	38.9 AV	54.0	-15.1	1.25 H	84	31.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	2.62 V	180	70.2	-2.0
2	2390.00	52.0 AV	54.0	-2.0	2.62 V	180	54.0	-2.0
3	*2417.00	117.0 PK			2.62 V	180	119.1	-2.1
4	*2417.00	104.4 AV			2.62 V	180	106.5	-2.1
5	4834.00	45.3 PK	74.0	-28.7	1.03 V	122	43.2	2.1
6	4834.00	35.1 AV	54.0	-18.9	1.03 V	122	33.0	2.1
7	7251.00	51.4 PK	74.0	-22.6	1.68 V	116	43.8	7.6
8	7251.00	40.5 AV	54.0	-13.5	1.68 V	116	32.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.41 H	206	69.2	-2.0
2	2390.00	50.0 AV	54.0	-4.0	1.41 H	206	52.0	-2.0
3	*2437.00	118.3 PK			1.41 H	206	120.4	-2.1
4	*2437.00	108.6 AV			1.41 H	206	110.7	-2.1
5	2483.50	66.7 PK	74.0	-7.3	1.41 H	206	69.1	-2.4
6	2483.50	49.2 AV	54.0	-4.8	1.41 H	206	51.6	-2.4
7	4874.00	43.9 PK	74.0	-30.1	1.55 H	340	41.5	2.4
8	4874.00	33.5 AV	54.0	-20.5	1.55 H	340	31.1	2.4
9	7311.00	49.8 PK	74.0	-24.2	1.23 H	78	42.4	7.4
10	7311.00	38.9 AV	54.0	-15.1	1.23 H	78	31.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.76 V	194	73.7	-2.0
2	2390.00	51.2 AV	54.0	-2.8	1.76 V	194	53.2	-2.0
3	*2437.00	117.9 PK			1.76 V	194	120.0	-2.1
4	*2437.00	106.6 AV			1.76 V	194	108.7	-2.1
5	2483.50	71.4 PK	74.0	-2.6	1.76 V	194	73.8	-2.4
6	2483.50	52.3 AV	54.0	-1.7	1.76 V	194	54.7	-2.4
7	4874.00	45.4 PK	74.0	-28.6	1.07 V	125	43.0	2.4
8	4874.00	35.1 AV	54.0	-18.9	1.07 V	125	32.7	2.4
9	7311.00	51.6 PK	74.0	-22.4	1.62 V	126	44.2	7.4
10	7311.00	40.7 AV	54.0	-13.3	1.62 V	126	33.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.2 PK			1.19 H	163	118.6	-2.4
2	*2457.00	105.5 AV			1.19 H	163	107.9	-2.4
3	2483.50	68.8 PK	74.0	-5.2	1.19 H	163	71.2	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.19 H	163	54.8	-2.4
5	4914.00	43.8 PK	74.0	-30.2	1.58 H	328	41.3	2.5
6	4914.00	33.4 AV	54.0	-20.6	1.58 H	328	30.9	2.5
7	7371.00	49.5 PK	74.0	-24.5	1.23 H	88	41.9	7.6
8	7371.00	38.6 AV	54.0	-15.4	1.23 H	88	31.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	115.6 PK			2.43 V	193	118.0	-2.4
2	*2457.00	104.7 AV			2.43 V	193	107.1	-2.4
3	2483.50	64.2 PK	74.0	-9.8	2.43 V	193	66.6	-2.4
4	2483.50	50.2 AV	54.0	-3.8	2.43 V	193	52.6	-2.4
5	4914.00	46.0 PK	74.0	-28.0	1.01 V	122	43.5	2.5
6	4914.00	35.5 AV	54.0	-18.5	1.01 V	122	33.0	2.5
7	7371.00	51.4 PK	74.0	-22.6	1.67 V	137	43.8	7.6
8	7371.00	40.4 AV	54.0	-13.6	1.67 V	137	32.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.3 PK			3.80 H	133	118.7	-2.4
2	*2462.00	105.2 AV			3.80 H	133	107.6	-2.4
3	2483.50	65.7 PK	74.0	-8.3	3.80 H	133	68.1	-2.4
4	2483.50	52.4 AV	54.0	-1.6	3.80 H	133	54.8	-2.4
5	4924.00	43.7 PK	74.0	-30.3	1.50 H	343	41.2	2.5
6	4924.00	33.2 AV	54.0	-20.8	1.50 H	343	30.7	2.5
7	7386.00	49.2 PK	74.0	-24.8	1.29 H	95	41.5	7.7
8	7386.00	38.7 AV	54.0	-15.3	1.29 H	95	31.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.9 PK			2.05 V	184	117.3	-2.4
2	*2462.00	104.1 AV			2.05 V	184	106.5	-2.4
3	2483.50	67.5 PK	74.0	-6.5	2.05 V	184	69.9	-2.4
4	2483.50	52.4 AV	54.0	-1.6	2.05 V	184	54.8	-2.4
5	4924.00	44.9 PK	74.0	-29.1	1.00 V	119	42.4	2.5
6	4924.00	34.9 AV	54.0	-19.1	1.00 V	119	32.4	2.5
7	7386.00	51.3 PK	74.0	-22.7	1.70 V	120	43.6	7.7
8	7386.00	40.3 AV	54.0	-13.7	1.70 V	120	32.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.5 PK			1.00 H	163	117.9	-2.4
2	*2467.00	103.5 AV			1.00 H	163	105.9	-2.4
3	2483.50	66.0 PK	74.0	-8.0	1.00 H	163	68.4	-2.4
4	2483.50	52.2 AV	54.0	-1.8	1.00 H	163	54.6	-2.4
5	4934.00	43.7 PK	74.0	-30.3	1.53 H	354	41.3	2.4
6	4934.00	33.2 AV	54.0	-20.8	1.53 H	354	30.8	2.4
7	7401.00	48.7 PK	74.0	-25.3	1.31 H	99	40.8	7.9
8	7401.00	38.3 AV	54.0	-15.7	1.31 H	99	30.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.6 PK			2.98 V	179	117.0	-2.4
2	*2467.00	103.9 AV			2.98 V	179	106.3	-2.4
3	2483.50	66.5 PK	74.0	-7.5	2.98 V	179	68.9	-2.4
4	2483.50	52.4 AV	54.0	-1.6	2.98 V	179	54.8	-2.4
5	4934.00	44.7 PK	74.0	-29.3	1.00 V	131	42.3	2.4
6	4934.00	34.6 AV	54.0	-19.4	1.00 V	131	32.2	2.4
7	7401.00	51.5 PK	74.0	-22.5	1.72 V	131	43.6	7.9
8	7401.00	40.0 AV	54.0	-14.0	1.72 V	131	32.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.4 PK			1.00 H	164	115.8	-2.4
2	*2472.00	102.3 AV			1.00 H	164	104.7	-2.4
3	2483.50	70.0 PK	74.0	-4.0	1.00 H	164	72.4	-2.4
4	2483.50	51.6 AV	54.0	-2.4	1.00 H	164	54.0	-2.4
5	4944.00	43.3 PK	74.0	-30.7	1.59 H	354	40.9	2.4
6	4944.00	32.8 AV	54.0	-21.2	1.59 H	354	30.4	2.4
7	7416.00	49.0 PK	74.0	-25.0	1.30 H	108	41.0	8.0
8	7416.00	38.4 AV	54.0	-15.6	1.30 H	108	30.4	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.4 PK			1.99 V	198	116.8	-2.4
2	*2472.00	102.0 AV			1.99 V	198	104.4	-2.4
3	2483.50	69.8 PK	74.0	-4.2	1.99 V	198	72.2	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.99 V	198	54.8	-2.4
5	4944.00	44.5 PK	74.0	-29.5	1.00 V	127	42.1	2.4
6	4944.00	34.6 AV	54.0	-19.4	1.00 V	127	32.2	2.4
7	7416.00	51.6 PK	74.0	-22.4	1.68 V	140	43.6	8.0
8	7416.00	39.8 AV	54.0	-14.2	1.68 V	140	31.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	3.98 H	134	66.5	-2.0
2	2390.00	51.1 AV	54.0	-2.9	3.98 H	134	53.1	-2.0
3	*2422.00	111.2 PK			3.98 H	134	113.3	-2.1
4	*2422.00	100.4 AV			3.98 H	134	102.5	-2.1
5	4844.00	39.3 PK	74.0	-34.7	1.36 H	333	37.1	2.2
6	4844.00	28.1 AV	54.0	-25.9	1.36 H	333	25.9	2.2
7	7266.00	45.3 PK	74.0	-28.7	2.27 H	22	37.7	7.6
8	7266.00	34.8 AV	54.0	-19.2	2.27 H	22	27.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	2.36 V	201	63.0	-2.0
2	2390.00	48.6 AV	54.0	-5.4	2.36 V	201	50.6	-2.0
3	*2422.00	110.9 PK			2.36 V	201	113.0	-2.1
4	*2422.00	98.9 AV			2.36 V	201	101.0	-2.1
5	4844.00	43.1 PK	74.0	-30.9	2.44 V	83	40.9	2.2
6	4844.00	31.5 AV	54.0	-22.5	2.44 V	83	29.3	2.2
7	7266.00	48.8 PK	74.0	-25.2	1.65 V	129	41.2	7.6
8	7266.00	37.0 AV	54.0	-17.0	1.65 V	129	29.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.52 H	243	70.2	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.52 H	243	54.3	-2.0
3	*2437.00	111.4 PK			1.52 H	243	113.5	-2.1
4	*2437.00	100.1 AV			1.52 H	243	102.2	-2.1
5	2483.50	67.9 PK	74.0	-6.1	1.52 H	243	70.3	-2.4
6	2483.50	52.2 AV	54.0	-1.8	1.52 H	243	54.6	-2.4
7	4874.00	39.6 PK	74.0	-34.4	1.38 H	347	37.2	2.4
8	4874.00	28.6 AV	54.0	-25.4	1.38 H	347	26.2	2.4
9	7311.00	45.5 PK	74.0	-28.5	2.25 H	37	38.1	7.4
10	7311.00	35.0 AV	54.0	-19.0	2.25 H	37	27.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.83 V	192	69.5	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.83 V	192	54.3	-2.0
3	*2437.00	112.0 PK			1.83 V	192	114.1	-2.1
4	*2437.00	101.0 AV			1.83 V	192	103.1	-2.1
5	2483.50	67.7 PK	74.0	-6.3	1.83 V	192	70.1	-2.4
6	2483.50	52.4 AV	54.0	-1.6	1.83 V	192	54.8	-2.4
7	4874.00	43.3 PK	74.0	-30.7	2.40 V	67	40.9	2.4
8	4874.00	31.8 AV	54.0	-22.2	2.40 V	67	29.4	2.4
9	7311.00	48.6 PK	74.0	-25.4	1.60 V	130	41.2	7.4
10	7311.00	37.0 AV	54.0	-17.0	1.60 V	130	29.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	110.7 PK			1.54 H	172	112.9	-2.2
2	*2452.00	101.0 AV			1.54 H	172	103.2	-2.2
3	2483.50	64.2 PK	74.0	-9.8	1.54 H	172	66.6	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.54 H	172	54.8	-2.4
5	4904.00	39.4 PK	74.0	-34.6	1.39 H	338	36.9	2.5
6	4904.00	28.2 AV	54.0	-25.8	1.39 H	338	25.7	2.5
7	7356.00	45.1 PK	74.0	-28.9	2.32 H	24	37.6	7.5
8	7356.00	34.5 AV	54.0	-19.5	2.32 H	24	27.0	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	111.3 PK			2.02 V	197	113.5	-2.2
2	*2452.00	100.0 AV			2.02 V	197	102.2	-2.2
3	2483.50	65.3 PK	74.0	-8.7	2.02 V	197	67.7	-2.4
4	2483.50	52.3 AV	54.0	-1.7	2.02 V	197	54.7	-2.4
5	4904.00	43.5 PK	74.0	-30.5	2.44 V	88	41.0	2.5
6	4904.00	31.7 AV	54.0	-22.3	2.44 V	88	29.2	2.5
7	7356.00	48.5 PK	74.0	-25.5	1.63 V	128	41.0	7.5
8	7356.00	36.5 AV	54.0	-17.5	1.63 V	128	29.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	111.0 PK			1.54 H	240	113.4	-2.4
2	*2457.00	100.0 AV			1.54 H	240	102.4	-2.4
3	2483.50	65.6 PK	74.0	-8.4	1.54 H	240	68.0	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.54 H	240	54.8	-2.4
5	4914.00	39.4 PK	74.0	-34.6	1.32 H	322	36.9	2.5
6	4914.00	28.2 AV	54.0	-25.8	1.32 H	322	25.7	2.5
7	7371.00	45.4 PK	74.0	-28.6	2.28 H	19	37.8	7.6
8	7371.00	34.8 AV	54.0	-19.2	2.28 H	19	27.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	109.8 PK			2.06 V	196	112.2	-2.4
2	*2457.00	99.2 AV			2.06 V	196	101.6	-2.4
3	2483.50	66.6 PK	74.0	-7.4	2.06 V	196	69.0	-2.4
4	2483.50	51.3 AV	54.0	-2.7	2.06 V	196	53.7	-2.4
5	4914.00	44.1 PK	74.0	-29.9	2.46 V	78	41.6	2.5
6	4914.00	31.5 AV	54.0	-22.5	2.46 V	78	29.0	2.5
7	7371.00	48.5 PK	74.0	-25.5	1.58 V	120	40.9	7.6
8	7371.00	36.3 AV	54.0	-17.7	1.58 V	120	28.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			1.09 H	165	109.9	-2.4
2	*2462.00	98.0 AV			1.09 H	165	100.4	-2.4
3	2483.50	70.8 PK	74.0	-3.2	1.09 H	165	73.2	-2.4
4	2483.50	48.3 AV	54.0	-5.7	1.09 H	165	50.7	-2.4
5	4924.00	39.2 PK	74.0	-34.8	1.36 H	309	36.7	2.5
6	4924.00	28.2 AV	54.0	-25.8	1.36 H	309	25.7	2.5
7	7386.00	45.3 PK	74.0	-28.7	2.25 H	29	37.6	7.7
8	7386.00	34.7 AV	54.0	-19.3	2.25 H	29	27.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.7 PK			1.99 V	186	111.1	-2.4
2	*2462.00	97.3 AV			1.99 V	186	99.7	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.99 V	186	73.8	-2.4
4	2483.50	48.1 AV	54.0	-5.9	1.99 V	186	50.5	-2.4
5	4924.00	44.3 PK	74.0	-29.7	2.41 V	71	41.8	2.5
6	4924.00	31.4 AV	54.0	-22.6	2.41 V	71	28.9	2.5
7	7386.00	48.7 PK	74.0	-25.3	1.62 V	132	41.0	7.7
8	7386.00	36.0 AV	54.0	-18.0	1.62 V	132	28.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.50 H	10	73.8	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.50 H	10	47.6	-2.0
3	*2412.00	120.6 PK			1.50 H	10	122.7	-2.1
4	*2412.00	109.4 AV			1.50 H	10	111.5	-2.1
5	4824.00	46.0 PK	74.0	-28.0	1.11 H	329	43.9	2.1
6	4824.00	36.0 AV	54.0	-18.0	1.11 H	329	33.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	2.58 V	194	67.0	-2.0
2	2390.00	46.2 AV	54.0	-7.8	2.58 V	194	48.2	-2.0
3	*2412.00	121.8 PK			2.58 V	194	123.9	-2.1
4	*2412.00	110.5 AV			2.58 V	194	112.6	-2.1
5	4824.00	45.9 PK	74.0	-28.1	3.43 V	151	43.8	2.1
6	4824.00	36.6 AV	54.0	-17.4	3.43 V	151	34.5	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.28 H	14	73.7	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.28 H	14	47.6	-2.0
3	*2417.00	120.9 PK			1.28 H	14	123.0	-2.1
4	*2417.00	110.0 AV			1.28 H	14	112.1	-2.1
5	4834.00	46.2 PK	74.0	-27.8	1.18 H	325	44.1	2.1
6	4834.00	36.0 AV	54.0	-18.0	1.18 H	325	33.9	2.1
7	7251.00	54.8 PK	74.0	-19.2	2.96 H	20	47.2	7.6
8	7251.00	39.0 AV	54.0	-15.0	2.96 H	20	31.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	2.52 V	186	70.2	-2.0
2	2390.00	45.7 AV	54.0	-8.3	2.52 V	186	47.7	-2.0
3	*2417.00	122.0 PK			2.52 V	186	124.1	-2.1
4	*2417.00	110.8 AV			2.52 V	186	112.9	-2.1
5	4834.00	46.7 PK	74.0	-27.3	3.38 V	154	44.6	2.1
6	4834.00	37.0 AV	54.0	-17.0	3.38 V	154	34.9	2.1
7	7251.00	55.8 PK	74.0	-18.2	1.42 V	147	48.2	7.6
8	7251.00	40.3 AV	54.0	-13.7	1.42 V	147	32.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.3 PK	74.0	-3.7	1.49 H	9	72.3	-2.0
2	2390.00	45.3 AV	54.0	-8.7	1.49 H	9	47.3	-2.0
3	*2437.00	124.7 PK			1.49 H	9	126.8	-2.1
4	*2437.00	112.5 AV			1.49 H	9	114.6	-2.1
5	2483.50	61.3 PK	74.0	-12.7	1.49 H	9	63.7	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.49 H	9	47.2	-2.4
7	4874.00	46.5 PK	74.0	-27.5	1.15 H	341	44.1	2.4
8	4874.00	36.4 AV	54.0	-17.6	1.15 H	341	34.0	2.4
9	7311.00	54.8 PK	74.0	-19.2	2.97 H	21	47.4	7.4
10	7311.00	39.4 AV	54.0	-14.6	2.97 H	21	32.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	2.53 V	180	64.4	-2.0
2	2390.00	45.0 AV	54.0	-9.0	2.53 V	180	47.0	-2.0
3	*2437.00	124.6 PK			2.53 V	180	126.7	-2.1
4	*2437.00	112.5 AV			2.53 V	180	114.6	-2.1
5	2483.50	58.3 PK	74.0	-15.7	2.53 V	180	60.7	-2.4
6	2483.50	44.6 AV	54.0	-9.4	2.53 V	180	47.0	-2.4
7	4874.00	47.3 PK	74.0	-26.7	3.44 V	156	44.9	2.4
8	4874.00	37.5 AV	54.0	-16.5	3.44 V	156	35.1	2.4
9	7311.00	56.0 PK	74.0	-18.0	1.42 V	145	48.6	7.4
10	7311.00	40.7 AV	54.0	-13.3	1.42 V	145	33.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	120.6 PK			1.47 H	11	123.0	-2.4
2	*2457.00	109.2 AV			1.47 H	11	111.6	-2.4
3	2483.50	70.0 PK	74.0	-4.0	1.47 H	11	72.4	-2.4
4	2483.50	44.9 AV	54.0	-9.1	1.47 H	11	47.3	-2.4
5	4914.00	46.1 PK	74.0	-27.9	1.23 H	317	43.6	2.5
6	4914.00	35.9 AV	54.0	-18.1	1.23 H	317	33.4	2.5
7	7371.00	55.3 PK	74.0	-18.7	2.92 H	10	47.7	7.6
8	7371.00	39.0 AV	54.0	-15.0	2.92 H	10	31.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	120.8 PK			2.07 V	174	123.2	-2.4
2	*2457.00	110.0 AV			2.07 V	174	112.4	-2.4
3	2483.50	72.0 PK	74.0	-2.0	2.07 V	174	74.4	-2.4
4	2483.50	45.0 AV	54.0	-9.0	2.07 V	174	47.4	-2.4
5	4914.00	46.0 PK	74.0	-28.0	3.39 V	144	43.5	2.5
6	4914.00	36.5 AV	54.0	-17.5	3.39 V	144	34.0	2.5
7	7371.00	55.8 PK	74.0	-18.2	1.39 V	136	48.2	7.6
8	7371.00	40.0 AV	54.0	-14.0	1.39 V	136	32.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.6 PK			1.44 H	12	123.0	-2.4
2	*2462.00	110.4 AV			1.44 H	12	112.8	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.44 H	12	73.8	-2.4
4	2483.50	47.0 AV	54.0	-7.0	1.44 H	12	49.4	-2.4
5	4924.00	46.5 PK	74.0	-27.5	1.18 H	329	44.0	2.5
6	4924.00	35.5 AV	54.0	-18.5	1.18 H	329	33.0	2.5
7	7386.00	54.9 PK	74.0	-19.1	2.96 H	9	47.2	7.7
8	7386.00	38.6 AV	54.0	-15.4	2.96 H	9	30.9	7.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	121.4 PK			2.21 V	174	123.8	-2.4
2	*2462.00	111.0 AV			2.21 V	174	113.4	-2.4
3	2483.50	70.6 PK	74.0	-3.4	2.21 V	174	73.0	-2.4
4	2483.50	46.5 AV	54.0	-7.5	2.21 V	174	48.9	-2.4
5	4924.00	45.8 PK	74.0	-28.2	3.35 V	147	43.3	2.5
6	4924.00	36.1 AV	54.0	-17.9	3.35 V	147	33.6	2.5
7	7386.00	55.7 PK	74.0	-18.3	1.34 V	126	48.0	7.7
8	7386.00	39.7 AV	54.0	-14.3	1.34 V	126	32.0	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	120.5 PK			1.42 H	12	122.9	-2.4
2	*2467.00	110.2 AV			1.42 H	12	112.6	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.42 H	12	73.6	-2.4
4	2483.50	48.4 AV	54.0	-5.6	1.42 H	12	50.8	-2.4
5	4934.00	46.1 PK	74.0	-27.9	1.15 H	317	43.7	2.4
6	4934.00	35.1 AV	54.0	-18.9	1.15 H	317	32.7	2.4
7	7401.00	54.8 PK	74.0	-19.2	3.01 H	15	46.9	7.9
8	7401.00	38.5 AV	54.0	-15.5	3.01 H	15	30.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	122.0 PK			2.87 V	181	124.4	-2.4
2	*2467.00	111.1 AV			2.87 V	181	113.5	-2.4
3	2483.50	70.4 PK	74.0	-3.6	2.87 V	181	72.8	-2.4
4	2483.50	46.9 AV	54.0	-7.1	2.87 V	181	49.3	-2.4
5	4934.00	45.9 PK	74.0	-28.1	3.40 V	135	43.5	2.4
6	4934.00	36.0 AV	54.0	-18.0	3.40 V	135	33.6	2.4
7	7401.00	55.6 PK	74.0	-18.4	1.29 V	114	47.7	7.9
8	7401.00	39.5 AV	54.0	-14.5	1.29 V	114	31.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	117.5 PK			1.25 H	21	119.9	-2.4
2	*2472.00	107.2 AV			1.25 H	21	109.6	-2.4
3	2483.50	71.1 PK	74.0	-2.9	1.25 H	21	73.5	-2.4
4	2483.50	48.9 AV	54.0	-5.1	1.25 H	21	51.3	-2.4
5	4944.00	45.9 PK	74.0	-28.1	1.15 H	320	43.5	2.4
6	4944.00	35.1 AV	54.0	-18.9	1.15 H	320	32.7	2.4
7	7416.00	54.7 PK	74.0	-19.3	2.95 H	24	46.7	8.0
8	7416.00	38.2 AV	54.0	-15.8	2.95 H	24	30.2	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	119.6 PK			2.35 V	190	122.0	-2.4
2	*2472.00	108.5 AV			2.35 V	190	110.9	-2.4
3	2483.50	72.4 PK	74.0	-1.6	2.35 V	190	74.8	-2.4
4	2483.50	50.2 AV	54.0	-3.8	2.35 V	190	52.6	-2.4
5	4944.00	45.9 PK	74.0	-28.1	3.44 V	140	43.5	2.4
6	4944.00	35.7 AV	54.0	-18.3	3.44 V	140	33.3	2.4
7	7416.00	55.2 PK	74.0	-18.8	1.23 V	109	47.2	8.0
8	7416.00	39.3 AV	54.0	-14.7	1.23 V	109	31.3	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.32 H	11	74.4	-2.0
2	2390.00	45.4 AV	54.0	-8.6	1.32 H	11	47.4	-2.0
3	*2412.00	119.0 PK			1.32 H	11	121.1	-2.1
4	*2412.00	108.0 AV			1.32 H	11	110.1	-2.1
5	4824.00	40.5 PK	74.0	-33.5	1.12 H	325	38.4	2.1
6	4824.00	32.4 AV	54.0	-21.6	1.12 H	325	30.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	2.32 V	194	72.6	-2.0
2	2390.00	45.5 AV	54.0	-8.5	2.32 V	194	47.5	-2.0
3	*2412.00	119.3 PK			2.32 V	194	121.4	-2.1
4	*2412.00	108.4 AV			2.32 V	194	110.5	-2.1
5	4824.00	44.0 PK	74.0	-30.0	1.60 V	174	41.9	2.1
6	4824.00	34.4 AV	54.0	-19.6	1.60 V	174	32.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.06 H	13	73.3	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.06 H	13	47.8	-2.0
3	*2417.00	120.0 PK			1.06 H	13	122.1	-2.1
4	*2417.00	109.0 AV			1.06 H	13	111.1	-2.1
5	4834.00	40.5 PK	74.0	-33.5	1.11 H	330	38.4	2.1
6	4834.00	32.6 AV	54.0	-21.4	1.11 H	330	30.5	2.1
7	7251.00	51.3 PK	74.0	-22.7	2.20 H	18	43.7	7.6
8	7251.00	40.5 AV	54.0	-13.5	2.20 H	18	32.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	2.29 V	192	72.0	-2.0
2	2390.00	46.1 AV	54.0	-7.9	2.29 V	192	48.1	-2.0
3	*2417.00	120.0 PK			2.29 V	192	122.1	-2.1
4	*2417.00	109.0 AV			2.29 V	192	111.1	-2.1
5	4834.00	44.3 PK	74.0	-29.7	1.60 V	190	42.2	2.1
6	4834.00	34.6 AV	54.0	-19.4	1.60 V	190	32.5	2.1
7	7251.00	54.5 PK	74.0	-19.5	1.32 V	133	46.9	7.6
8	7251.00	40.4 AV	54.0	-13.6	1.32 V	133	32.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.26 H	15	74.0	-2.0
2	2390.00	45.4 AV	54.0	-8.6	1.26 H	15	47.4	-2.0
3	*2437.00	121.9 PK			1.26 H	15	124.0	-2.1
4	*2437.00	110.0 AV			1.26 H	15	112.1	-2.1
5	2483.50	63.5 PK	74.0	-10.5	1.26 H	15	65.9	-2.4
6	2483.50	44.6 AV	54.0	-9.4	1.26 H	15	47.0	-2.4
7	4874.00	40.8 PK	74.0	-33.2	1.13 H	340	38.4	2.4
8	4874.00	33.1 AV	54.0	-20.9	1.13 H	340	30.7	2.4
9	7311.00	51.0 PK	74.0	-23.0	2.24 H	30	43.6	7.4
10	7311.00	40.8 AV	54.0	-13.2	2.24 H	30	33.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	3.10 V	194	74.4	-2.0
2	2390.00	45.3 AV	54.0	-8.7	3.10 V	194	47.3	-2.0
3	*2437.00	122.8 PK			3.10 V	194	124.9	-2.1
4	*2437.00	101.5 AV			3.10 V	194	103.6	-2.1
5	2483.50	65.0 PK	74.0	-9.0	3.10 V	194	67.4	-2.4
6	2483.50	44.8 AV	54.0	-9.2	3.10 V	194	47.2	-2.4
7	4874.00	43.9 PK	74.0	-30.1	1.61 V	202	41.5	2.4
8	4874.00	35.0 AV	54.0	-19.0	1.61 V	202	32.6	2.4
9	7311.00	54.8 PK	74.0	-19.2	1.36 V	124	47.4	7.4
10	7311.00	40.8 AV	54.0	-13.2	1.36 V	124	33.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	117.8 PK			1.47 H	11	120.2	-2.4
2	*2457.00	107.5 AV			1.47 H	11	109.9	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.47 H	11	74.8	-2.4
4	2483.50	45.0 AV	54.0	-9.0	1.47 H	11	47.4	-2.4
5	4914.00	40.6 PK	74.0	-33.4	1.14 H	334	38.1	2.5
6	4914.00	32.5 AV	54.0	-21.5	1.14 H	334	30.0	2.5
7	7371.00	51.0 PK	74.0	-23.0	2.24 H	17	43.4	7.6
8	7371.00	40.2 AV	54.0	-13.8	2.24 H	17	32.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.0 PK			3.00 V	184	120.4	-2.4
2	*2457.00	108.0 AV			3.00 V	184	110.4	-2.4
3	2483.50	63.7 PK	74.0	-10.3	3.00 V	184	66.1	-2.4
4	2483.50	45.4 AV	54.0	-8.6	3.00 V	184	47.8	-2.4
5	4914.00	44.4 PK	74.0	-29.6	1.60 V	186	41.9	2.5
6	4914.00	34.6 AV	54.0	-19.4	1.60 V	186	32.1	2.5
7	7371.00	54.4 PK	74.0	-19.6	1.34 V	143	46.8	7.6
8	7371.00	40.5 AV	54.0	-13.5	1.34 V	143	32.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.6 PK			1.09 H	163	121.0	-2.4
2	*2462.00	108.5 AV			1.09 H	163	110.9	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.09 H	163	73.9	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.09 H	163	49.2	-2.4
5	4924.00	40.7 PK	74.0	-33.3	1.13 H	340	38.2	2.5
6	4924.00	32.2 AV	54.0	-21.8	1.13 H	340	29.7	2.5
7	7386.00	50.6 PK	74.0	-23.4	2.26 H	26	42.9	7.7
8	7386.00	39.9 AV	54.0	-14.1	2.26 H	26	32.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.2 PK			3.02 V	192	121.6	-2.4
2	*2462.00	108.5 AV			3.02 V	192	110.9	-2.4
3	2483.50	70.8 PK	74.0	-3.2	3.02 V	192	73.2	-2.4
4	2483.50	45.7 AV	54.0	-8.3	3.02 V	192	48.1	-2.4
5	4924.00	44.3 PK	74.0	-29.7	1.57 V	187	41.8	2.5
6	4924.00	34.5 AV	54.0	-19.5	1.57 V	187	32.0	2.5
7	7386.00	54.2 PK	74.0	-19.8	1.31 V	146	46.5	7.7
8	7386.00	40.4 AV	54.0	-13.6	1.31 V	146	32.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.9 PK			1.20 H	12	121.3	-2.4
2	*2467.00	108.8 AV			1.20 H	12	111.2	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.20 H	12	74.8	-2.4
4	2483.50	48.0 AV	54.0	-6.0	1.20 H	12	50.4	-2.4
5	4934.00	40.7 PK	74.0	-33.3	1.18 H	348	38.3	2.4
6	4934.00	32.0 AV	54.0	-22.0	1.18 H	348	29.6	2.4
7	7401.00	50.5 PK	74.0	-23.5	2.31 H	36	42.6	7.9
8	7401.00	39.7 AV	54.0	-14.3	2.31 H	36	31.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	120.3 PK			2.00 V	169	122.7	-2.4
2	*2467.00	108.3 AV			2.00 V	169	110.7	-2.4
3	2483.50	64.0 PK	74.0	-10.0	2.00 V	169	66.4	-2.4
4	2483.50	46.5 AV	54.0	-7.5	2.00 V	169	48.9	-2.4
5	4934.00	43.8 PK	74.0	-30.2	1.57 V	189	41.4	2.4
6	4934.00	34.2 AV	54.0	-19.8	1.57 V	189	31.8	2.4
7	7401.00	53.9 PK	74.0	-20.1	1.29 V	135	46.0	7.9
8	7401.00	40.1 AV	54.0	-13.9	1.29 V	135	32.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	117.0 PK			1.22 H	12	119.4	-2.4
2	*2472.00	104.8 AV			1.22 H	12	107.2	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.22 H	12	73.7	-2.4
4	2483.50	49.0 AV	54.0	-5.0	1.22 H	12	51.4	-2.4
5	4944.00	40.4 PK	74.0	-33.6	1.21 H	350	38.0	2.4
6	4944.00	31.6 AV	54.0	-22.4	1.21 H	350	29.2	2.4
7	7416.00	50.7 PK	74.0	-23.3	2.34 H	34	42.7	8.0
8	7416.00	39.3 AV	54.0	-14.7	2.34 H	34	31.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	117.2 PK			2.25 V	179	119.6	-2.4
2	*2472.00	106.2 AV			2.25 V	179	108.6	-2.4
3	2483.50	70.1 PK	74.0	-3.9	2.25 V	179	72.5	-2.4
4	2483.50	50.4 AV	54.0	-3.6	2.25 V	179	52.8	-2.4
5	4944.00	44.4 PK	74.0	-29.6	1.60 V	183	42.0	2.4
6	4944.00	34.0 AV	54.0	-20.0	1.60 V	183	31.6	2.4
7	7416.00	53.9 PK	74.0	-20.1	1.30 V	132	45.9	8.0
8	7416.00	39.8 AV	54.0	-14.2	1.30 V	132	31.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.52 H	9	73.0	-2.0
2	2390.00	47.3 AV	54.0	-6.7	1.52 H	9	49.3	-2.0
3	*2412.00	117.4 PK			1.52 H	9	119.5	-2.1
4	*2412.00	106.0 AV			1.52 H	9	108.1	-2.1
5	4824.00	41.7 PK	74.0	-32.3	1.22 H	352	39.6	2.1
6	4824.00	33.0 AV	54.0	-21.0	1.22 H	352	30.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	3.13 V	192	72.1	-2.0
2	2390.00	46.2 AV	54.0	-7.8	3.13 V	192	48.2	-2.0
3	*2412.00	116.6 PK			3.13 V	192	118.7	-2.1
4	*2412.00	105.8 AV			3.13 V	192	107.9	-2.1
5	4824.00	44.9 PK	74.0	-29.1	1.72 V	192	42.8	2.1
6	4824.00	34.8 AV	54.0	-19.2	1.72 V	192	32.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.08 H	10	73.3	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.08 H	10	48.3	-2.0
3	*2417.00	118.9 PK			1.08 H	10	121.0	-2.1
4	*2417.00	106.4 AV			1.08 H	10	108.5	-2.1
5	4834.00	42.3 PK	74.0	-31.7	1.27 H	357	40.2	2.1
6	4834.00	33.0 AV	54.0	-21.0	1.27 H	357	30.9	2.1
7	7251.00	53.8 PK	74.0	-20.2	2.46 H	28	46.2	7.6
8	7251.00	41.0 AV	54.0	-13.0	2.46 H	28	33.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	2.31 V	193	72.8	-2.0
2	2390.00	46.0 AV	54.0	-8.0	2.31 V	193	48.0	-2.0
3	*2417.00	118.0 PK			2.31 V	193	120.1	-2.1
4	*2417.00	106.0 AV			2.31 V	193	108.1	-2.1
5	4834.00	44.8 PK	74.0	-29.2	1.72 V	192	42.7	2.1
6	4834.00	35.0 AV	54.0	-19.0	1.72 V	192	32.9	2.1
7	7251.00	56.7 PK	74.0	-17.3	3.12 V	193	49.1	7.6
8	7251.00	43.0 AV	54.0	-11.0	3.12 V	193	35.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.04 H	9	74.3	-2.0
2	2390.00	45.7 AV	54.0	-8.3	1.04 H	9	47.7	-2.0
3	*2437.00	120.0 PK			1.04 H	9	122.1	-2.1
4	*2437.00	107.0 AV			1.04 H	9	109.1	-2.1
5	2483.50	61.5 PK	74.0	-12.5	1.04 H	9	63.9	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.04 H	9	47.2	-2.4
7	4874.00	42.2 PK	74.0	-31.8	1.28 H	344	39.8	2.4
8	4874.00	33.4 AV	54.0	-20.6	1.28 H	344	31.0	2.4
9	7311.00	54.3 PK	74.0	-19.7	2.41 H	27	46.9	7.4
10	7311.00	41.3 AV	54.0	-12.7	2.41 H	27	33.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	2.78 V	189	74.4	-2.0
2	2390.00	45.9 AV	54.0	-8.1	2.78 V	189	47.9	-2.0
3	*2437.00	119.5 PK			2.78 V	189	121.6	-2.1
4	*2437.00	107.7 AV			2.78 V	189	109.8	-2.1
5	2483.50	64.3 PK	74.0	-9.7	2.78 V	189	66.7	-2.4
6	2483.50	45.0 AV	54.0	-9.0	2.78 V	189	47.4	-2.4
7	4874.00	44.8 PK	74.0	-29.2	1.70 V	178	42.4	2.4
8	4874.00	35.6 AV	54.0	-18.4	1.70 V	178	33.2	2.4
9	7311.00	57.1 PK	74.0	-16.9	3.14 V	202	49.7	7.4
10	7311.00	43.5 AV	54.0	-10.5	3.14 V	202	36.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	115.8 PK			1.25 H	10	118.2	-2.4
2	*2457.00	105.2 AV			1.25 H	10	107.6	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.25 H	10	74.6	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.25 H	10	47.8	-2.4
5	4914.00	42.6 PK	74.0	-31.4	1.28 H	6	40.1	2.5
6	4914.00	33.1 AV	54.0	-20.9	1.28 H	6	30.6	2.5
7	7371.00	53.5 PK	74.0	-20.5	2.44 H	28	45.9	7.6
8	7371.00	41.0 AV	54.0	-13.0	2.44 H	28	33.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.5 PK			1.97 V	187	118.9	-2.4
2	*2457.00	105.2 AV			1.97 V	187	107.6	-2.4
3	2483.50	64.0 PK	74.0	-10.0	1.97 V	187	66.4	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.97 V	187	48.0	-2.4
5	4914.00	45.3 PK	74.0	-28.7	1.67 V	205	42.8	2.5
6	4914.00	34.5 AV	54.0	-19.5	1.67 V	205	32.0	2.5
7	7371.00	56.5 PK	74.0	-17.5	3.09 V	208	48.9	7.6
8	7371.00	42.8 AV	54.0	-11.2	3.09 V	208	35.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.0 PK			1.06 H	9	118.4	-2.4
2	*2462.00	105.1 AV			1.06 H	9	107.5	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.06 H	9	74.8	-2.4
4	2483.50	46.7 AV	54.0	-7.3	1.06 H	9	49.1	-2.4
5	4924.00	42.0 PK	74.0	-32.0	1.26 H	9	39.5	2.5
6	4924.00	32.7 AV	54.0	-21.3	1.26 H	9	30.2	2.5
7	7386.00	53.5 PK	74.0	-20.5	2.43 H	22	45.8	7.7
8	7386.00	40.8 AV	54.0	-13.2	2.43 H	22	33.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.6 PK			2.19 V	174	119.0	-2.4
2	*2462.00	105.5 AV			2.19 V	174	107.9	-2.4
3	2483.50	64.5 PK	74.0	-9.5	2.19 V	174	66.9	-2.4
4	2483.50	47.1 AV	54.0	-6.9	2.19 V	174	49.5	-2.4
5	4924.00	45.4 PK	74.0	-28.6	1.66 V	210	42.9	2.5
6	4924.00	34.3 AV	54.0	-19.7	1.66 V	210	31.8	2.5
7	7386.00	56.2 PK	74.0	-17.8	3.05 V	223	48.5	7.7
8	7386.00	42.7 AV	54.0	-11.3	3.05 V	223	35.0	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.9 PK			1.43 H	10	118.3	-2.4
2	*2467.00	104.8 AV			1.43 H	10	107.2	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.43 H	10	74.8	-2.4
4	2483.50	50.0 AV	54.0	-4.0	1.43 H	10	52.4	-2.4
5	4934.00	42.1 PK	74.0	-31.9	1.27 H	5	39.7	2.4
6	4934.00	32.6 AV	54.0	-21.4	1.27 H	5	30.2	2.4
7	7401.00	53.9 PK	74.0	-20.1	2.48 H	39	46.0	7.9
8	7401.00	40.5 AV	54.0	-13.5	2.48 H	39	32.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.2 PK			2.31 V	188	118.6	-2.4
2	*2467.00	105.4 AV			2.31 V	188	107.8	-2.4
3	2483.50	72.4 PK	74.0	-1.6	2.31 V	188	74.8	-2.4
4	2483.50	51.8 AV	54.0	-2.2	2.31 V	188	54.2	-2.4
5	4934.00	45.3 PK	74.0	-28.7	1.74 V	188	42.9	2.4
6	4934.00	34.0 AV	54.0	-20.0	1.74 V	188	31.6	2.4
7	7401.00	55.9 PK	74.0	-18.1	3.06 V	237	48.0	7.9
8	7401.00	42.3 AV	54.0	-11.7	3.06 V	237	34.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.3 PK			1.22 H	10	116.7	-2.4
2	*2472.00	102.9 AV			1.22 H	10	105.3	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.22 H	10	73.9	-2.4
4	2483.50	51.3 AV	54.0	-2.7	1.22 H	10	53.7	-2.4
5	4944.00	42.7 PK	74.0	-31.3	1.29 H	8	40.3	2.4
6	4944.00	32.4 AV	54.0	-21.6	1.29 H	8	30.0	2.4
7	7416.00	54.2 PK	74.0	-19.8	2.43 H	34	46.2	8.0
8	7416.00	40.2 AV	54.0	-13.8	2.43 H	34	32.2	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.5 PK			2.32 V	181	116.9	-2.4
2	*2472.00	103.0 AV			2.32 V	181	105.4	-2.4
3	2483.50	72.2 PK	74.0	-1.8	2.32 V	181	74.6	-2.4
4	2483.50	50.3 AV	54.0	-3.7	2.32 V	181	52.7	-2.4
5	4944.00	45.1 PK	74.0	-28.9	1.71 V	184	42.7	2.4
6	4944.00	33.7 AV	54.0	-20.3	1.71 V	184	31.3	2.4
7	7416.00	56.5 PK	74.0	-17.5	3.02 V	236	48.5	8.0
8	7416.00	42.0 AV	54.0	-12.0	3.02 V	236	34.0	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.05 H	7	74.4	-2.0
2	2390.00	46.1 AV	54.0	-7.9	1.05 H	7	48.1	-2.0
3	*2412.00	118.2 PK			1.05 H	7	120.3	-2.1
4	*2412.00	106.6 AV			1.05 H	7	108.7	-2.1
5	4824.00	41.4 PK	74.0	-32.6	2.37 H	267	39.3	2.1
6	4824.00	30.7 AV	54.0	-23.3	2.37 H	267	28.6	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	3.13 V	184	70.9	-2.0
2	2390.00	45.6 AV	54.0	-8.4	3.13 V	184	47.6	-2.0
3	*2412.00	118.2 PK			3.13 V	184	120.3	-2.1
4	*2412.00	106.3 AV			3.13 V	184	108.4	-2.1
5	4824.00	52.4 PK	74.0	-21.6	2.45 V	155	50.3	2.1
6	4824.00	40.3 AV	54.0	-13.7	2.45 V	155	38.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.06 H	10	73.3	-2.0
2	2390.00	46.6 AV	54.0	-7.4	1.06 H	10	48.6	-2.0
3	*2417.00	119.0 PK			1.06 H	10	121.1	-2.1
4	*2417.00	108.3 AV			1.06 H	10	110.4	-2.1
5	4834.00	41.8 PK	74.0	-32.2	2.38 H	281	39.7	2.1
6	4834.00	31.2 AV	54.0	-22.8	2.38 H	281	29.1	2.1
7	7251.00	55.7 PK	74.0	-18.3	3.50 H	139	48.1	7.6
8	7251.00	41.4 AV	54.0	-12.6	3.50 H	139	33.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	2.46 V	172	73.6	-2.0
2	2390.00	46.3 AV	54.0	-7.7	2.46 V	172	48.3	-2.0
3	*2417.00	118.4 PK			2.46 V	172	120.5	-2.1
4	*2417.00	107.8 AV			2.46 V	172	109.9	-2.1
5	4834.00	52.6 PK	74.0	-21.4	2.48 V	159	50.5	2.1
6	4834.00	40.6 AV	54.0	-13.4	2.48 V	159	38.5	2.1
7	7251.00	55.8 PK	74.0	-18.2	3.43 V	211	48.2	7.6
8	7251.00	42.5 AV	54.0	-11.5	3.43 V	211	34.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.49 H	10	73.8	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.49 H	10	47.8	-2.0
3	*2437.00	121.5 PK			1.49 H	10	123.6	-2.1
4	*2437.00	109.8 AV			1.49 H	10	111.9	-2.1
5	2483.50	65.8 PK	74.0	-8.2	1.49 H	10	68.2	-2.4
6	2483.50	45.2 AV	54.0	-8.8	1.49 H	10	47.6	-2.4
7	4874.00	42.2 PK	74.0	-31.8	2.38 H	278	39.8	2.4
8	4874.00	31.5 AV	54.0	-22.5	2.38 H	278	29.1	2.4
9	7311.00	55.8 PK	74.0	-18.2	3.48 H	139	48.4	7.4
10	7311.00	41.5 AV	54.0	-12.5	3.48 H	139	34.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	2.78 V	180	74.4	-2.0
2	2390.00	46.3 AV	54.0	-7.7	2.78 V	180	48.3	-2.0
3	*2437.00	120.7 PK			2.78 V	180	122.8	-2.1
4	*2437.00	109.5 AV			2.78 V	180	111.6	-2.1
5	2483.50	64.0 PK	74.0	-10.0	2.78 V	180	66.4	-2.4
6	2483.50	45.5 AV	54.0	-8.5	2.78 V	180	47.9	-2.4
7	4874.00	53.0 PK	74.0	-21.0	2.53 V	153	50.6	2.4
8	4874.00	41.0 AV	54.0	-13.0	2.53 V	153	38.6	2.4
9	7311.00	56.1 PK	74.0	-17.9	3.38 V	205	48.7	7.4
10	7311.00	42.7 AV	54.0	-11.3	3.38 V	205	35.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.7 PK			1.01 H	8	121.1	-2.4
2	*2457.00	108.2 AV			1.01 H	8	110.6	-2.4
3	2483.50	71.1 PK	74.0	-2.9	1.01 H	8	73.5	-2.4
4	2483.50	46.1 AV	54.0	-7.9	1.01 H	8	48.5	-2.4
5	4914.00	41.6 PK	74.0	-32.4	2.32 H	288	39.1	2.5
6	4914.00	31.1 AV	54.0	-22.9	2.32 H	288	28.6	2.5
7	7371.00	56.0 PK	74.0	-18.0	3.49 H	125	48.4	7.6
8	7371.00	41.4 AV	54.0	-12.6	3.49 H	125	33.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.6 PK			2.34 V	170	121.0	-2.4
2	*2457.00	107.7 AV			2.34 V	170	110.1	-2.4
3	2483.50	72.4 PK	74.0	-1.6	2.34 V	170	74.8	-2.4
4	2483.50	46.1 AV	54.0	-7.9	2.34 V	170	48.5	-2.4
5	4914.00	52.8 PK	74.0	-21.2	2.43 V	143	50.3	2.5
6	4914.00	40.6 AV	54.0	-13.4	2.43 V	143	38.1	2.5
7	7371.00	55.5 PK	74.0	-18.5	3.47 V	226	47.9	7.6
8	7371.00	42.1 AV	54.0	-11.9	3.47 V	226	34.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.5 PK			1.01 H	10	120.9	-2.4
2	*2462.00	107.5 AV			1.01 H	10	109.9	-2.4
3	2483.50	72.3 PK	74.0	-1.7	1.01 H	10	74.7	-2.4
4	2483.50	46.3 AV	54.0	-7.7	1.01 H	10	48.7	-2.4
5	4924.00	41.0 PK	74.0	-33.0	2.26 H	294	38.5	2.5
6	4924.00	30.8 AV	54.0	-23.2	2.26 H	294	28.3	2.5
7	7386.00	56.2 PK	74.0	-17.8	3.54 H	109	48.5	7.7
8	7386.00	41.0 AV	54.0	-13.0	3.54 H	109	33.3	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.9 PK			2.38 V	166	120.3	-2.4
2	*2462.00	107.2 AV			2.38 V	166	109.6	-2.4
3	2483.50	71.6 PK	74.0	-2.4	2.38 V	166	74.0	-2.4
4	2483.50	47.1 AV	54.0	-6.9	2.38 V	166	49.5	-2.4
5	4924.00	52.5 PK	74.0	-21.5	2.48 V	158	50.0	2.5
6	4924.00	40.4 AV	54.0	-13.6	2.48 V	158	37.9	2.5
7	7386.00	55.8 PK	74.0	-18.2	3.44 V	220	48.1	7.7
8	7386.00	41.6 AV	54.0	-12.4	3.44 V	220	33.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.3 PK			1.19 H	9	119.7	-2.4
2	*2467.00	106.0 AV			1.19 H	9	108.4	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.19 H	9	73.6	-2.4
4	2483.50	47.8 AV	54.0	-6.2	1.19 H	9	50.2	-2.4
5	4934.00	40.8 PK	74.0	-33.2	2.24 H	280	38.4	2.4
6	4934.00	30.4 AV	54.0	-23.6	2.24 H	280	28.0	2.4
7	7401.00	56.2 PK	74.0	-17.8	3.55 H	101	48.3	7.9
8	7401.00	40.7 AV	54.0	-13.3	3.55 H	101	32.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.5 PK			1.96 V	163	119.9	-2.4
2	*2467.00	106.1 AV			1.96 V	163	108.5	-2.4
3	2483.50	70.5 PK	74.0	-3.5	1.96 V	163	72.9	-2.4
4	2483.50	46.9 AV	54.0	-7.1	1.96 V	163	49.3	-2.4
5	4934.00	52.3 PK	74.0	-21.7	2.45 V	159	49.9	2.4
6	4934.00	40.0 AV	54.0	-14.0	2.45 V	159	37.6	2.4
7	7401.00	55.7 PK	74.0	-18.3	3.38 V	205	47.8	7.9
8	7401.00	41.4 AV	54.0	-12.6	3.38 V	205	33.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.0 PK			1.20 H	9	118.4	-2.4
2	*2472.00	105.4 AV			1.20 H	9	107.8	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.20 H	9	73.7	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.20 H	9	54.8	-2.4
5	4944.00	40.7 PK	74.0	-33.3	2.28 H	268	38.3	2.4
6	4944.00	30.1 AV	54.0	-23.9	2.28 H	268	27.7	2.4
7	7416.00	55.8 PK	74.0	-18.2	3.52 H	111	47.8	8.0
8	7416.00	40.5 AV	54.0	-13.5	3.52 H	111	32.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	117.0 PK			2.74 V	177	119.4	-2.4
2	*2472.00	105.1 AV			2.74 V	177	107.5	-2.4
3	2483.50	67.0 PK	74.0	-7.0	2.74 V	177	69.4	-2.4
4	2483.50	51.0 AV	54.0	-3.0	2.74 V	177	53.4	-2.4
5	4944.00	52.3 PK	74.0	-21.7	2.45 V	159	49.9	2.4
6	4944.00	39.8 AV	54.0	-14.2	2.45 V	159	37.4	2.4
7	7416.00	55.5 PK	74.0	-18.5	3.44 V	217	47.5	8.0
8	7416.00	41.0 AV	54.0	-13.0	3.44 V	217	33.0	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.06 H	8	73.3	-2.0
2	2390.00	48.1 AV	54.0	-5.9	1.06 H	8	50.1	-2.0
3	*2412.00	117.8 PK			1.06 H	8	119.9	-2.1
4	*2412.00	105.1 AV			1.06 H	8	107.2	-2.1
5	4824.00	42.2 PK	74.0	-31.8	1.84 H	348	40.1	2.1
6	4824.00	31.2 AV	54.0	-22.8	1.84 H	348	29.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	3.22 V	194	74.4	-2.0
2	2390.00	48.7 AV	54.0	-5.3	3.22 V	194	50.7	-2.0
3	*2412.00	117.4 PK			3.22 V	194	119.5	-2.1
4	*2412.00	104.8 AV			3.22 V	194	106.9	-2.1
5	4824.00	48.9 PK	74.0	-25.1	2.38 V	146	46.8	2.1
6	4824.00	38.8 AV	54.0	-15.2	2.38 V	146	36.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.07 H	9	74.0	-2.0
2	2390.00	46.6 AV	54.0	-7.4	1.07 H	9	48.6	-2.0
3	*2417.00	118.0 PK			1.07 H	9	120.1	-2.1
4	*2417.00	105.3 AV			1.07 H	9	107.4	-2.1
5	4834.00	42.3 PK	74.0	-31.7	1.79 H	358	40.2	2.1
6	4834.00	31.4 AV	54.0	-22.6	1.79 H	358	29.3	2.1
7	7251.00	53.2 PK	74.0	-20.8	1.19 H	167	45.6	7.6
8	7251.00	40.0 AV	54.0	-14.0	1.19 H	167	32.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	2.84 V	192	73.8	-2.0
2	2390.00	47.4 AV	54.0	-6.6	2.84 V	192	49.4	-2.0
3	*2417.00	117.3 PK			2.84 V	192	119.4	-2.1
4	*2417.00	105.5 AV			2.84 V	192	107.6	-2.1
5	4834.00	49.4 PK	74.0	-24.6	2.29 V	124	47.3	2.1
6	4834.00	39.2 AV	54.0	-14.8	2.29 V	124	37.1	2.1
7	7251.00	57.8 PK	74.0	-16.2	3.16 V	211	50.2	7.6
8	7251.00	42.5 AV	54.0	-11.5	3.16 V	211	34.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.05 H	8	74.4	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.05 H	8	47.6	-2.0
3	*2437.00	119.5 PK			1.05 H	8	121.6	-2.1
4	*2437.00	106.9 AV			1.05 H	8	109.0	-2.1
5	2483.50	70.5 PK	74.0	-3.5	1.05 H	8	72.9	-2.4
6	2483.50	45.3 AV	54.0	-8.7	1.05 H	8	47.7	-2.4
7	4874.00	42.1 PK	74.0	-31.9	1.81 H	346	39.7	2.4
8	4874.00	31.5 AV	54.0	-22.5	1.81 H	346	29.1	2.4
9	7311.00	53.4 PK	74.0	-20.6	1.24 H	160	46.0	7.4
10	7311.00	40.4 AV	54.0	-13.6	1.24 H	160	33.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	2.52 V	188	74.0	-2.0
2	2390.00	45.4 AV	54.0	-8.6	2.52 V	188	47.4	-2.0
3	*2437.00	118.5 PK			2.52 V	188	120.6	-2.1
4	*2437.00	107.1 AV			2.52 V	188	109.2	-2.1
5	2483.50	63.8 PK	74.0	-10.2	2.52 V	188	66.2	-2.4
6	2483.50	45.0 AV	54.0	-9.0	2.52 V	188	47.4	-2.4
7	4874.00	49.6 PK	74.0	-24.4	2.32 V	129	47.2	2.4
8	4874.00	39.3 AV	54.0	-14.7	2.32 V	129	36.9	2.4
9	7311.00	58.2 PK	74.0	-15.8	3.18 V	199	50.8	7.4
10	7311.00	42.7 AV	54.0	-11.3	3.18 V	199	35.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	117.1 PK			1.01 H	9	119.5	-2.4
2	*2457.00	105.0 AV			1.01 H	9	107.4	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.01 H	9	73.6	-2.4
4	2483.50	46.4 AV	54.0	-7.6	1.01 H	9	48.8	-2.4
5	4914.00	40.9 PK	74.0	-33.1	1.80 H	316	38.4	2.5
6	4914.00	30.4 AV	54.0	-23.6	1.80 H	316	27.9	2.5
7	7371.00	52.9 PK	74.0	-21.1	1.22 H	145	45.3	7.6
8	7371.00	40.0 AV	54.0	-14.0	1.22 H	145	32.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.7 PK			3.09 V	193	119.1	-2.4
2	*2457.00	105.2 AV			3.09 V	193	107.6	-2.4
3	2483.50	71.6 PK	74.0	-2.4	3.09 V	193	74.0	-2.4
4	2483.50	46.0 AV	54.0	-8.0	3.09 V	193	48.4	-2.4
5	4914.00	49.2 PK	74.0	-24.8	2.38 V	132	46.7	2.5
6	4914.00	38.9 AV	54.0	-15.1	2.38 V	132	36.4	2.5
7	7371.00	57.7 PK	74.0	-16.3	3.22 V	200	50.1	7.6
8	7371.00	42.3 AV	54.0	-11.7	3.22 V	200	34.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.9 PK			1.01 H	11	117.3	-2.4
2	*2462.00	102.7 AV			1.01 H	11	105.1	-2.4
3	2483.50	71.0 PK	74.0	-3.0	1.01 H	11	73.4	-2.4
4	2483.50	47.2 AV	54.0	-6.8	1.01 H	11	49.6	-2.4
5	4924.00	41.1 PK	74.0	-32.9	1.79 H	319	38.6	2.5
6	4924.00	30.3 AV	54.0	-23.7	1.79 H	319	27.8	2.5
7	7386.00	52.6 PK	74.0	-21.4	1.24 H	133	44.9	7.7
8	7386.00	39.8 AV	54.0	-14.2	1.24 H	133	32.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.5 PK			1.98 V	169	117.9	-2.4
2	*2462.00	103.1 AV			1.98 V	169	105.5	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.98 V	169	74.4	-2.4
4	2483.50	47.7 AV	54.0	-6.3	1.98 V	169	50.1	-2.4
5	4924.00	48.6 PK	74.0	-25.4	2.36 V	134	46.1	2.5
6	4924.00	38.5 AV	54.0	-15.5	2.36 V	134	36.0	2.5
7	7386.00	57.4 PK	74.0	-16.6	3.26 V	207	49.7	7.7
8	7386.00	42.2 AV	54.0	-11.8	3.26 V	207	34.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.7 PK			1.19 H	11	117.1	-2.4
2	*2467.00	103.0 AV			1.19 H	11	105.4	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.19 H	11	74.4	-2.4
4	2483.50	50.4 AV	54.0	-3.6	1.19 H	11	52.8	-2.4
5	4934.00	40.4 PK	74.0	-33.6	1.86 H	315	38.0	2.4
6	4934.00	30.2 AV	54.0	-23.8	1.86 H	315	27.8	2.4
7	7401.00	51.8 PK	74.0	-22.2	1.27 H	149	43.9	7.9
8	7401.00	39.3 AV	54.0	-14.7	1.27 H	149	31.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.3 PK			1.98 V	166	116.7	-2.4
2	*2467.00	103.5 AV			1.98 V	166	105.9	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.98 V	166	73.9	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.98 V	166	52.7	-2.4
5	4934.00	49.1 PK	74.0	-24.9	2.41 V	138	46.7	2.4
6	4934.00	38.4 AV	54.0	-15.6	2.41 V	138	36.0	2.4
7	7401.00	57.3 PK	74.0	-16.7	3.31 V	196	49.4	7.9
8	7401.00	41.9 AV	54.0	-12.1	3.31 V	196	34.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.0 PK			1.21 H	10	117.4	-2.4
2	*2472.00	102.8 AV			1.21 H	10	105.2	-2.4
3	2483.50	71.0 PK	74.0	-3.0	1.21 H	10	73.4	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.21 H	10	54.4	-2.4
5	4944.00	40.3 PK	74.0	-33.7	1.89 H	303	37.9	2.4
6	4944.00	30.0 AV	54.0	-24.0	1.89 H	303	27.6	2.4
7	7416.00	51.6 PK	74.0	-22.4	1.25 H	152	43.6	8.0
8	7416.00	39.0 AV	54.0	-15.0	1.25 H	152	31.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.0 PK			1.98 V	200	117.4	-2.4
2	*2472.00	102.8 AV			1.98 V	200	105.2	-2.4
3	2483.50	68.8 PK	74.0	-5.2	1.98 V	200	71.2	-2.4
4	2483.50	50.5 AV	54.0	-3.5	1.98 V	200	52.9	-2.4
5	4944.00	48.5 PK	74.0	-25.5	2.44 V	126	46.1	2.4
6	4944.00	37.9 AV	54.0	-16.1	2.44 V	126	35.5	2.4
7	7416.00	57.6 PK	74.0	-16.4	3.36 V	180	49.6	8.0
8	7416.00	41.5 AV	54.0	-12.5	3.36 V	180	33.5	8.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

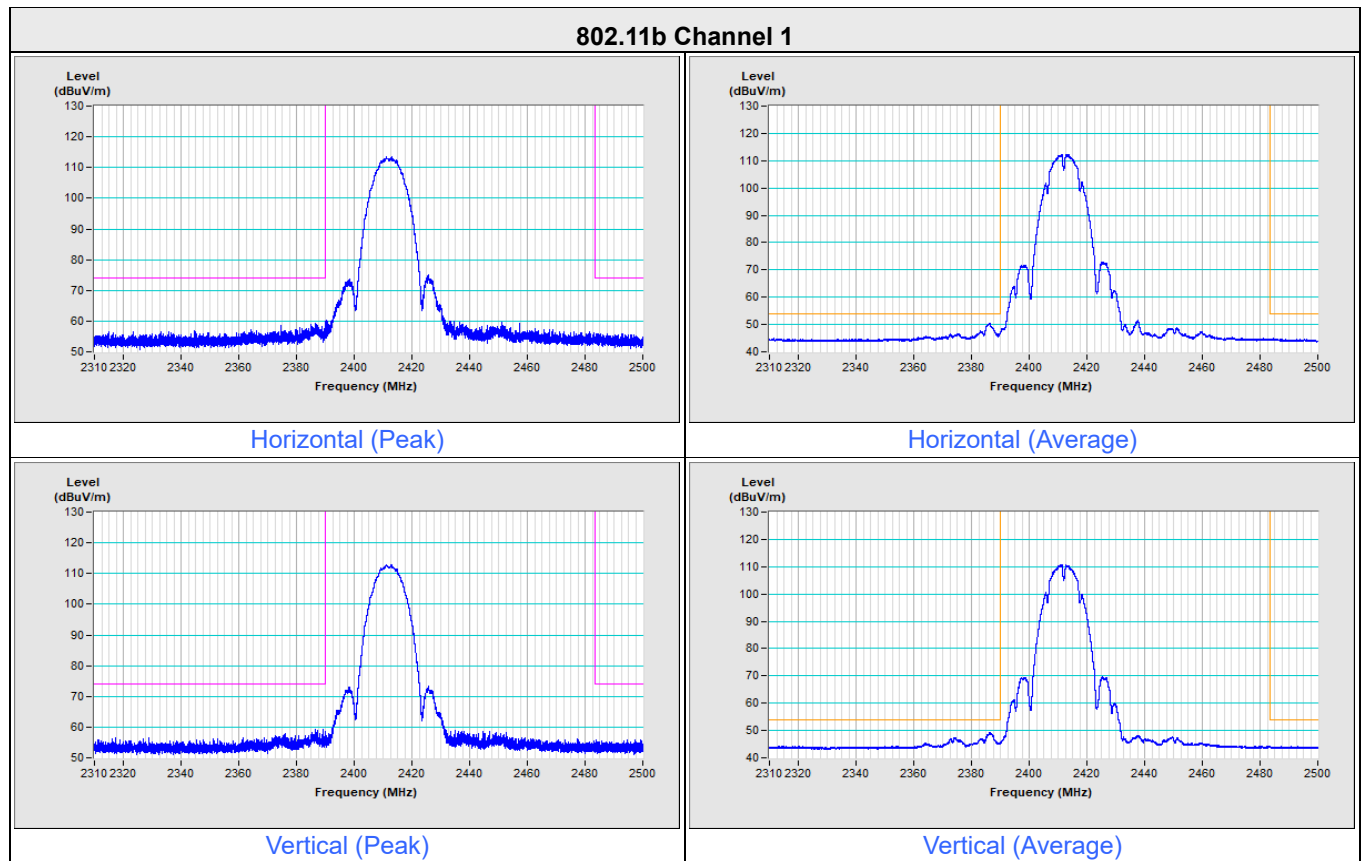


802.11b Channel 2

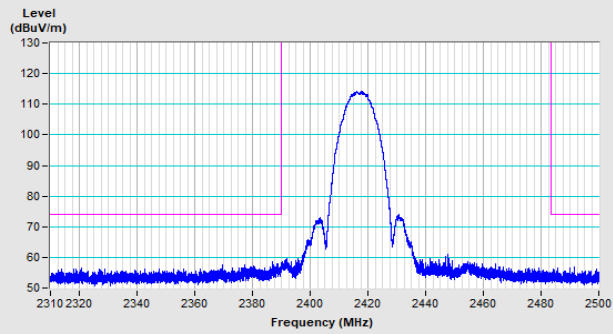


Horizontal (Peak)

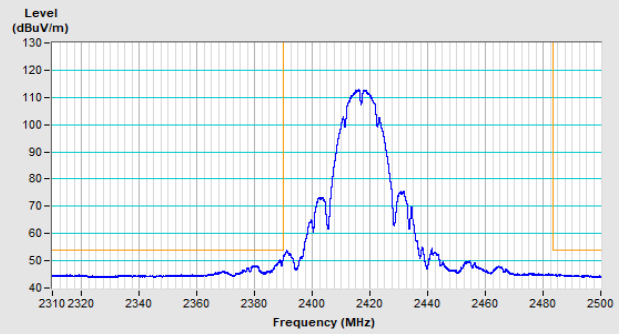

Horizontal (Average)

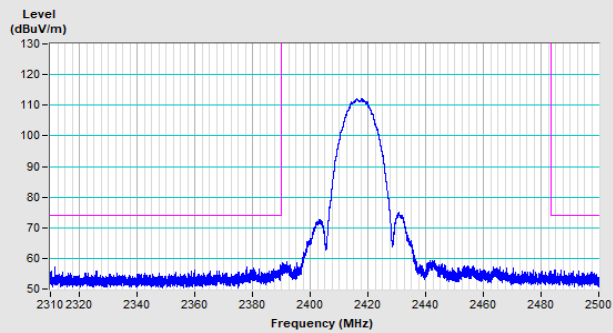


Vertical (Peak)

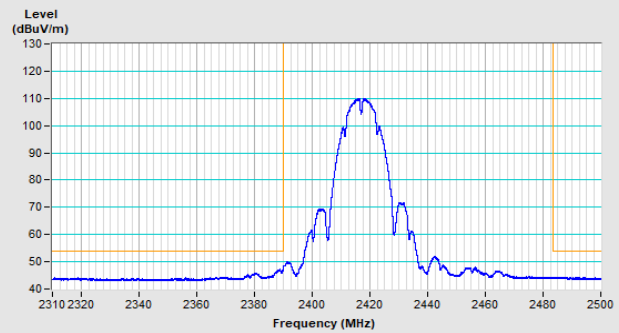


Vertical (Average)


802.11b Channel 10

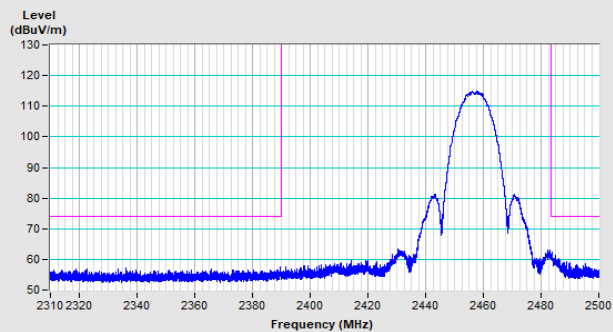


Horizontal (Peak)

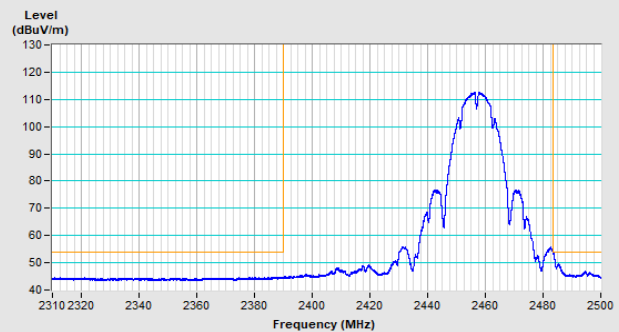

Horizontal (Average)

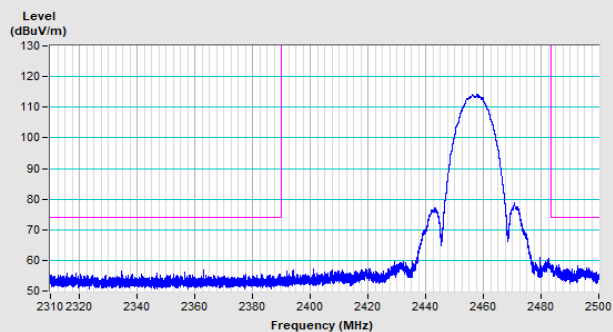


Vertical (Peak)

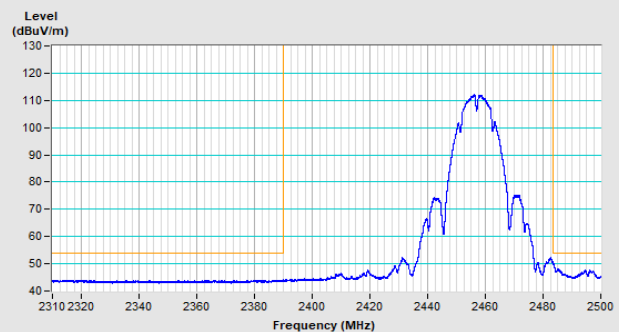


Vertical (Average)


802.11b Channel 11

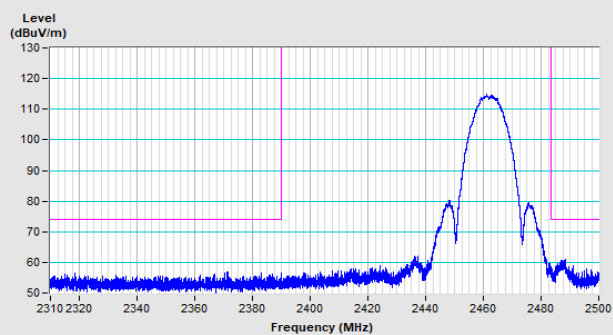


Horizontal (Peak)

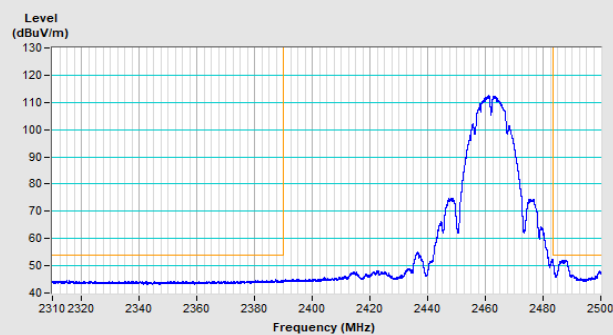

Horizontal (Average)

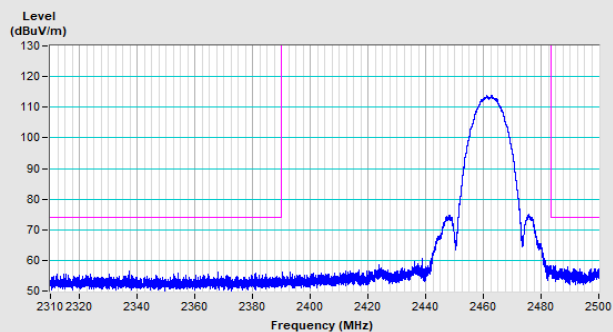


Vertical (Peak)

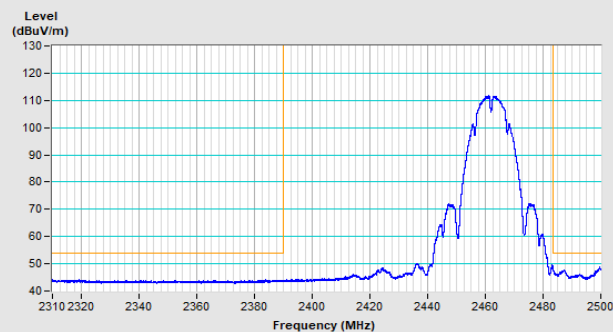


Vertical (Average)


802.11b Channel 12

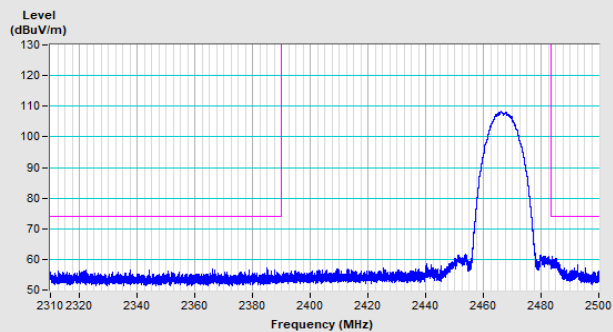


Horizontal (Peak)

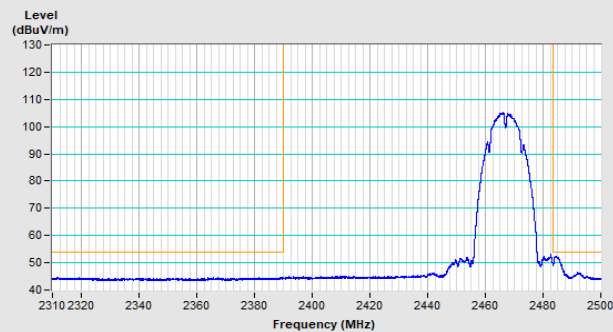

Horizontal (Average)

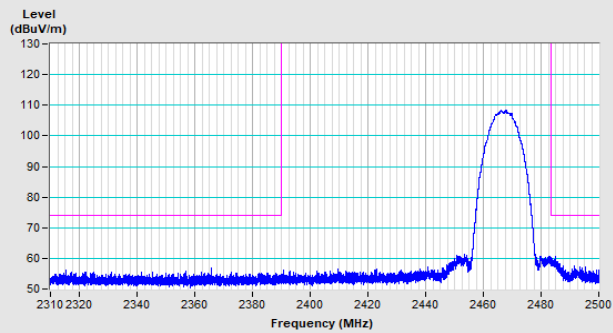


Vertical (Peak)

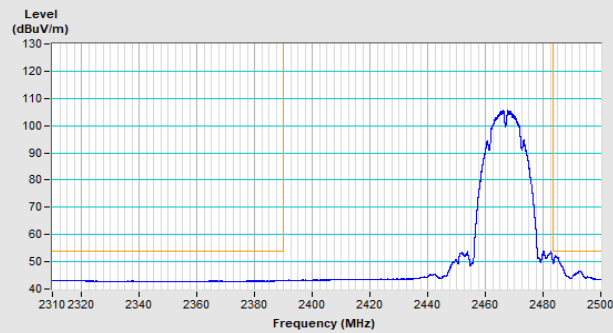


Vertical (Average)


802.11b Channel 13

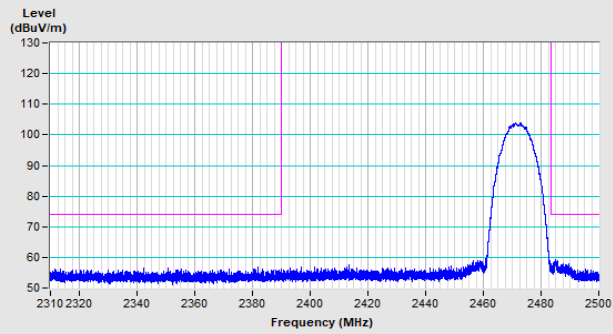


Horizontal (Peak)

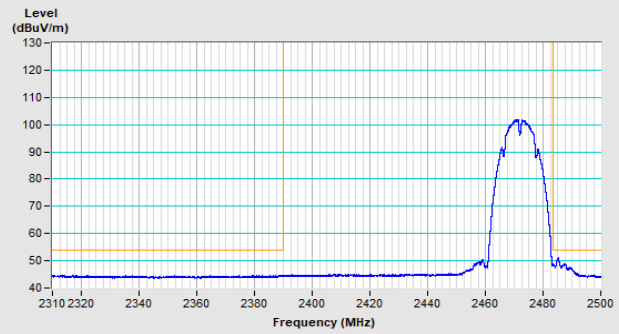

Horizontal (Average)

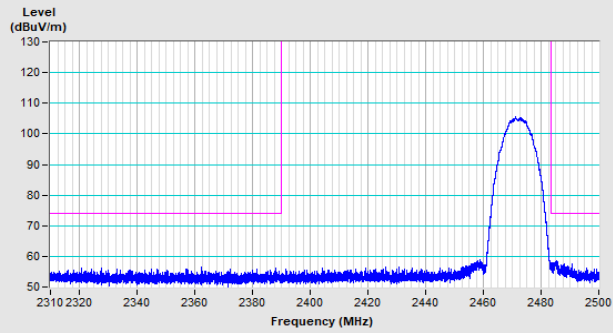


Vertical (Peak)

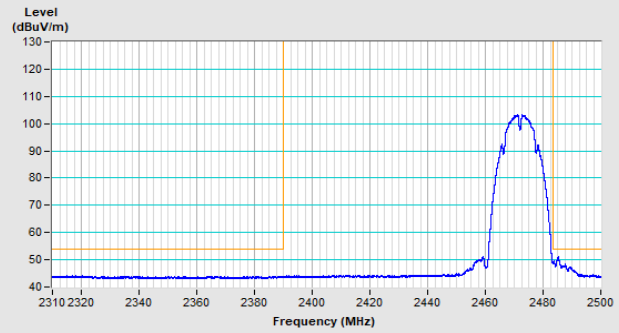


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

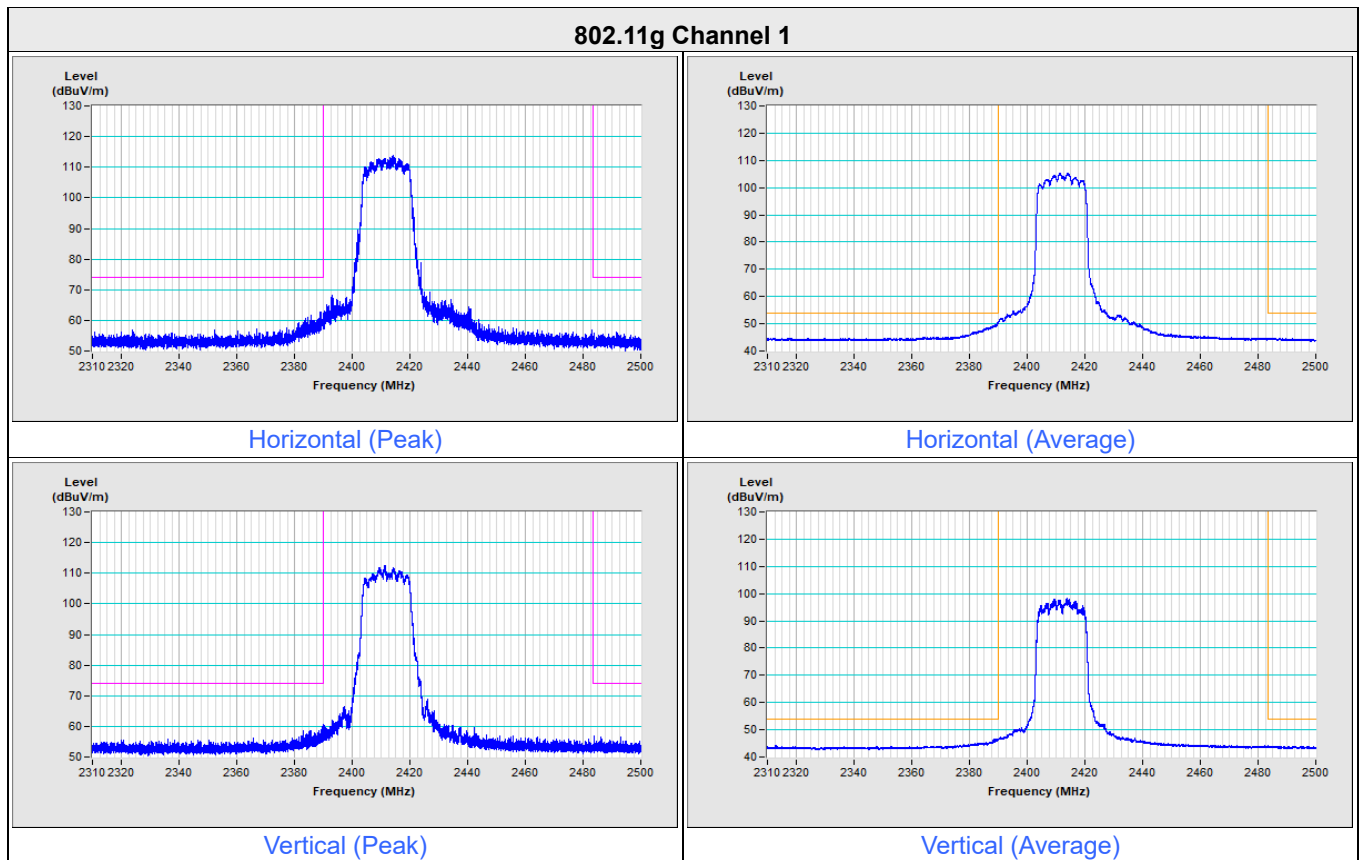


802.11g Channel 2

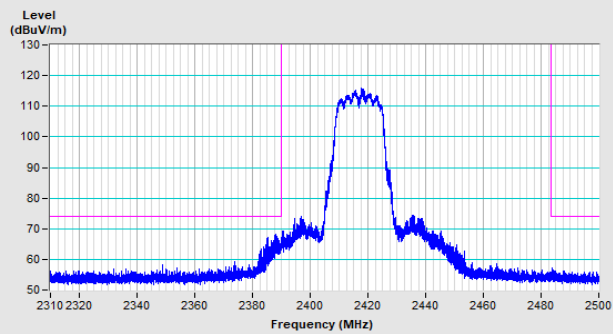


Horizontal (Peak)

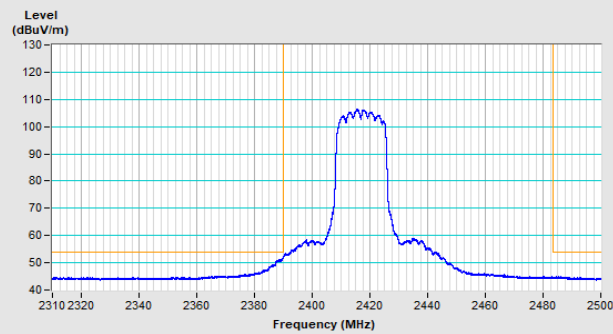

Horizontal (Average)

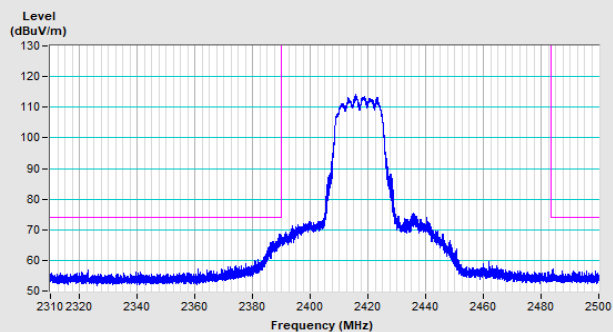


Vertical (Peak)

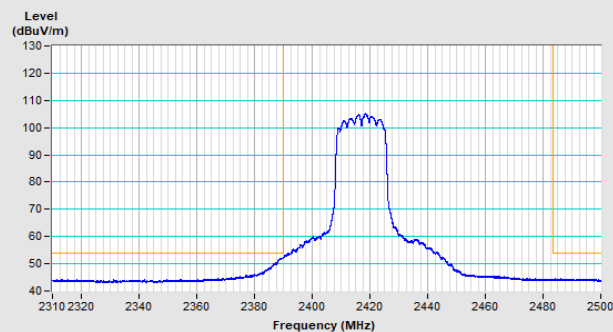


Vertical (Average)


802.11g Channel 10

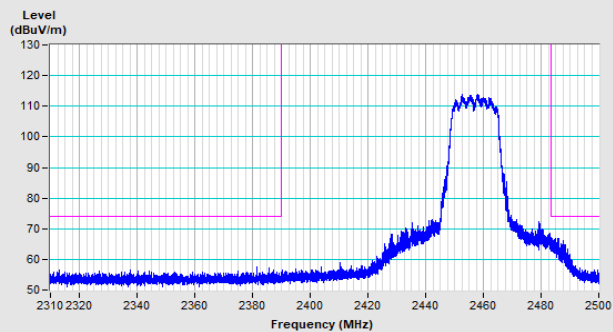


Horizontal (Peak)

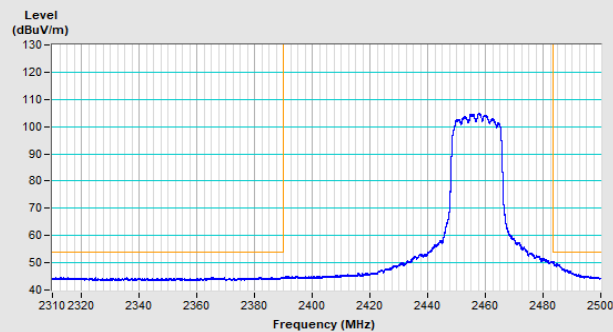

Horizontal (Average)

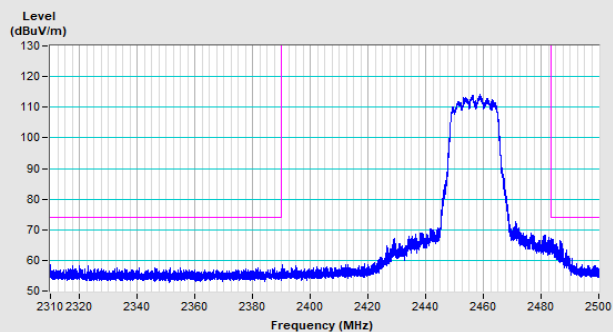


Vertical (Peak)

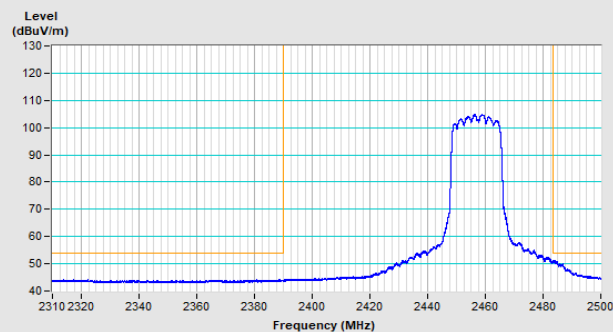


Vertical (Average)


802.11g Channel 11

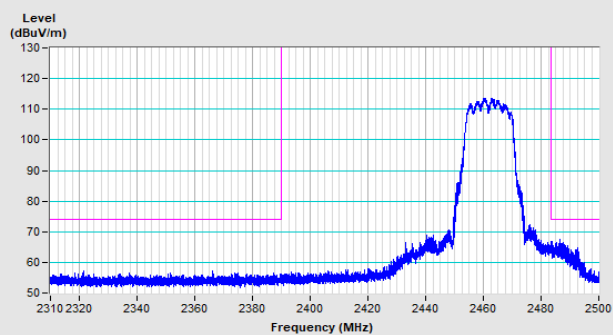


Horizontal (Peak)

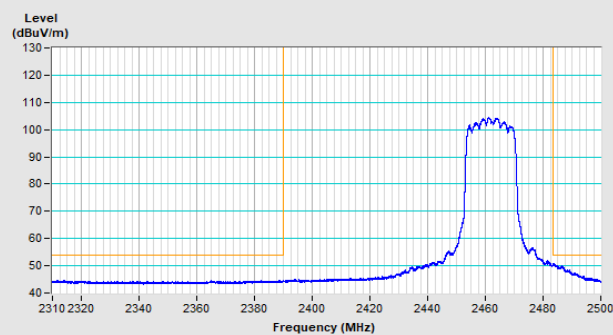

Horizontal (Average)

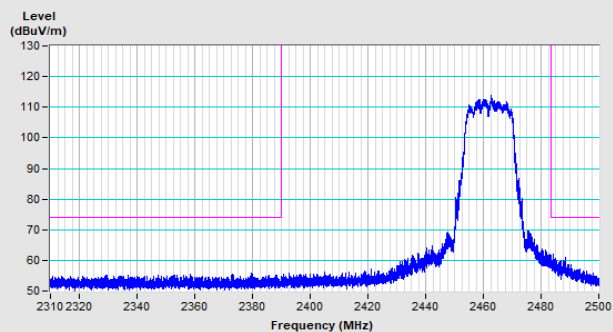


Vertical (Peak)

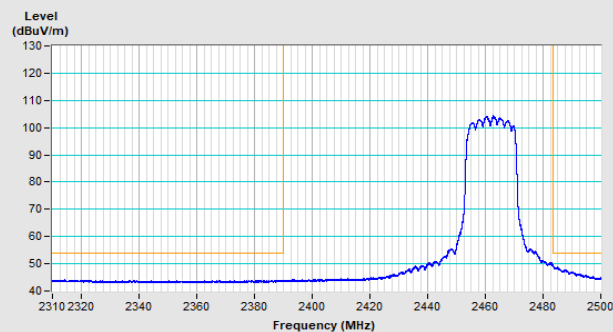


Vertical (Average)


802.11g Channel 12

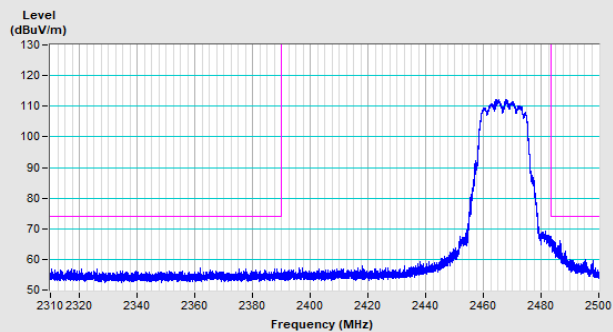


Horizontal (Peak)

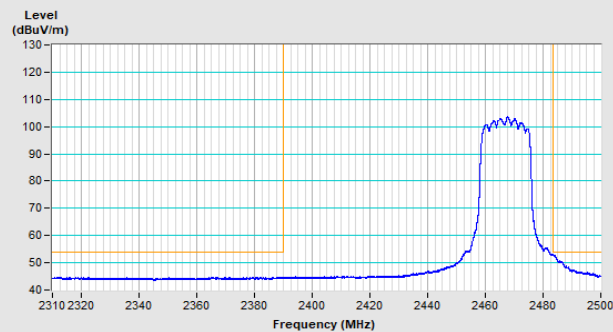

Horizontal (Average)

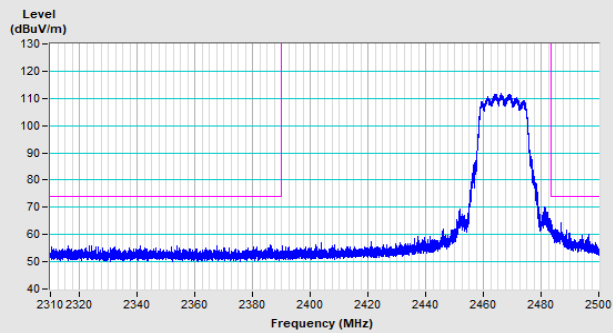


Vertical (Peak)

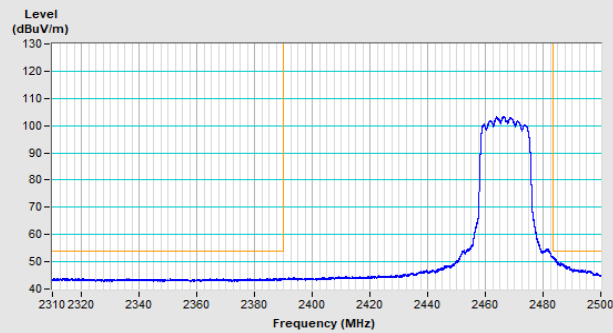


Vertical (Average)


802.11g Channel 13

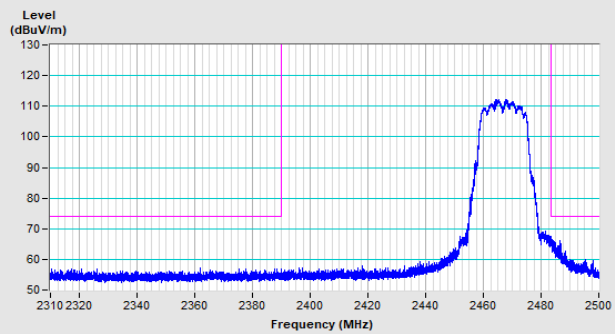


Horizontal (Peak)

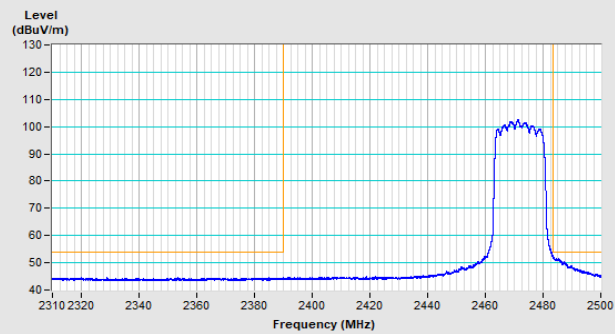

Horizontal (Average)

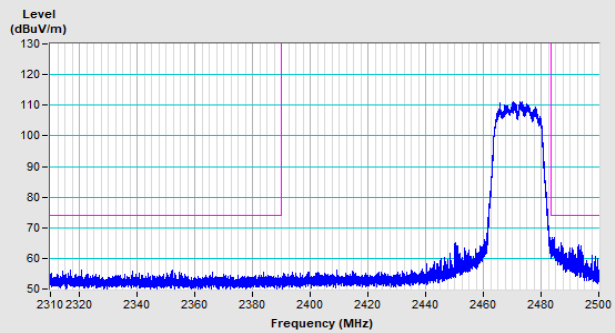


Vertical (Peak)

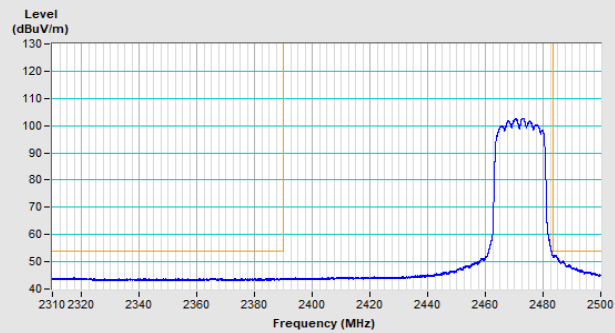


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

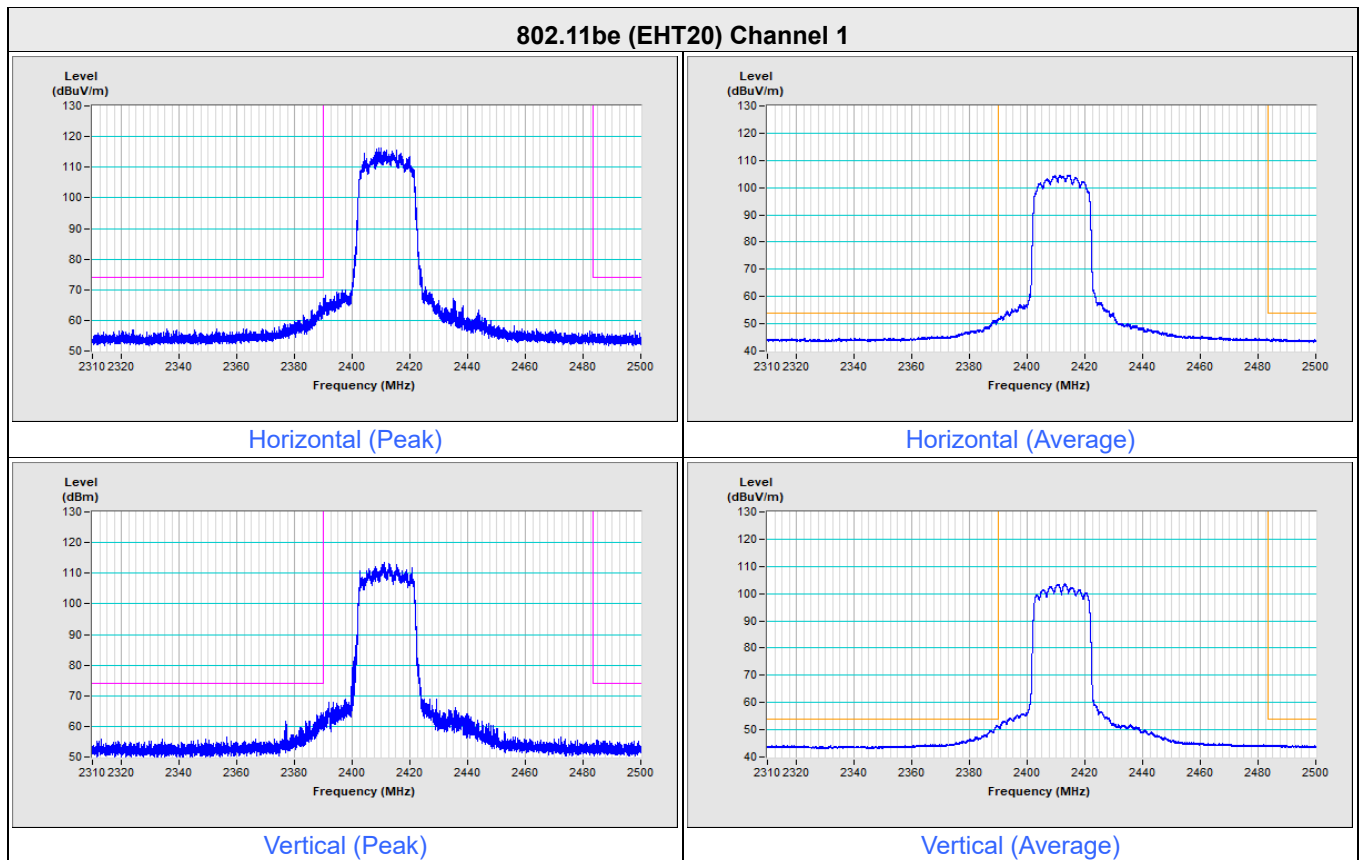


802.11be (EHT20) Channel 2

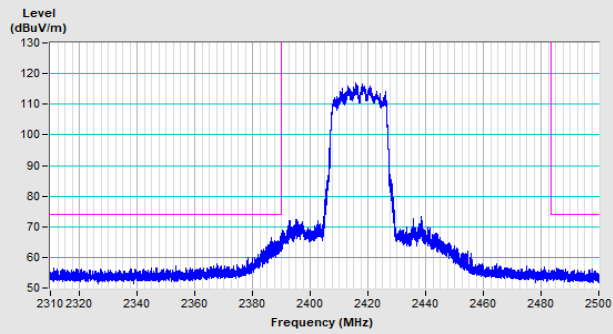


Horizontal (Peak)

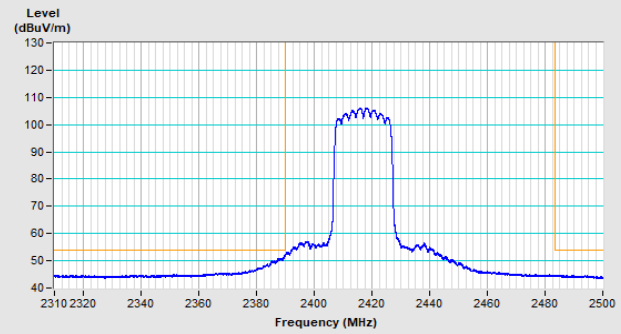

Horizontal (Average)

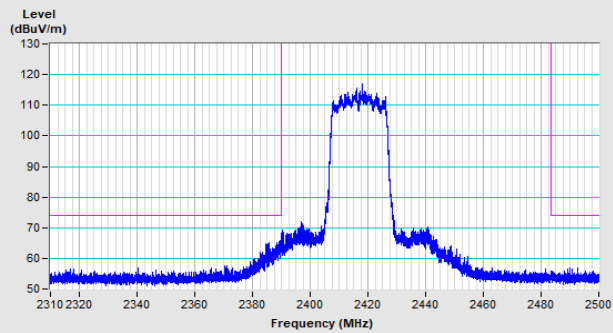


Vertical (Peak)

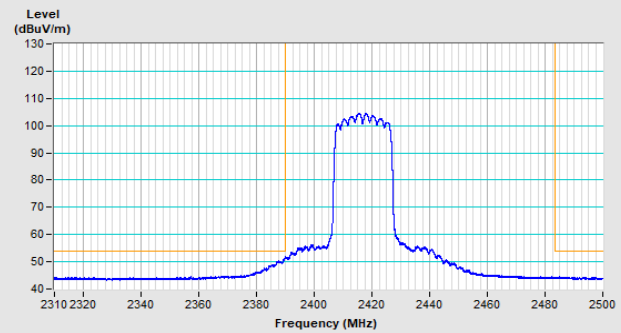


Vertical (Average)


802.11be (EHT20) Channel 10

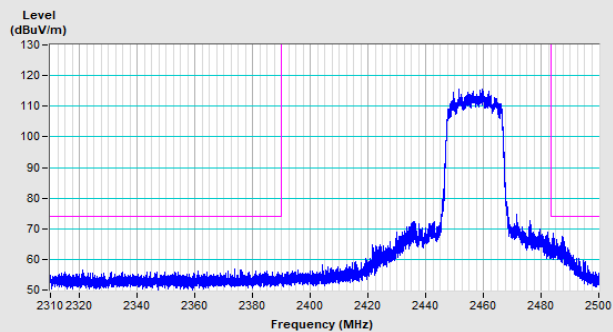


Horizontal (Peak)

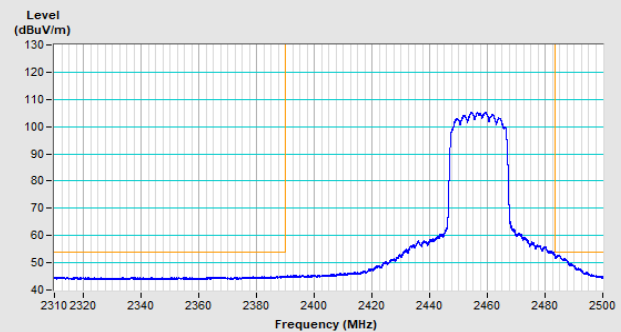

Horizontal (Average)

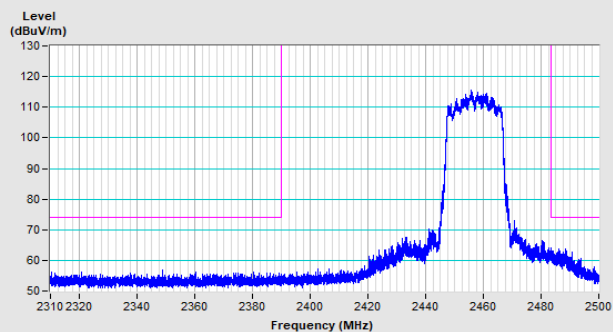


Vertical (Peak)

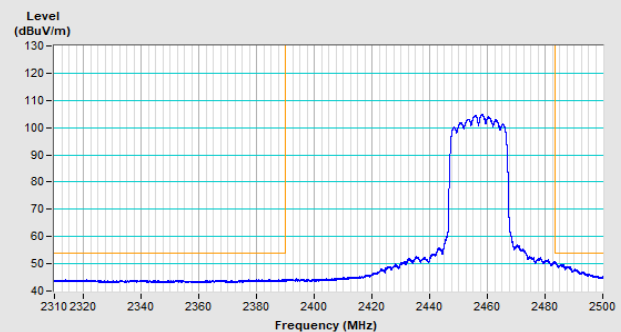


Vertical (Average)


802.11be (EHT20) Channel 11

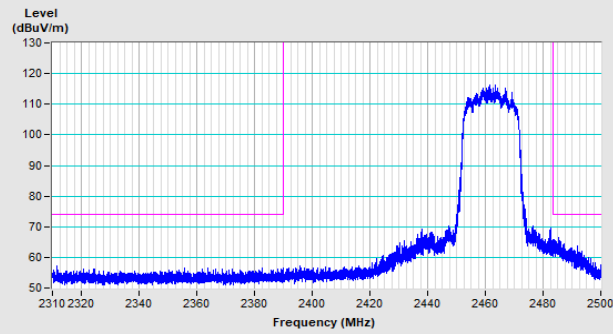


Horizontal (Peak)

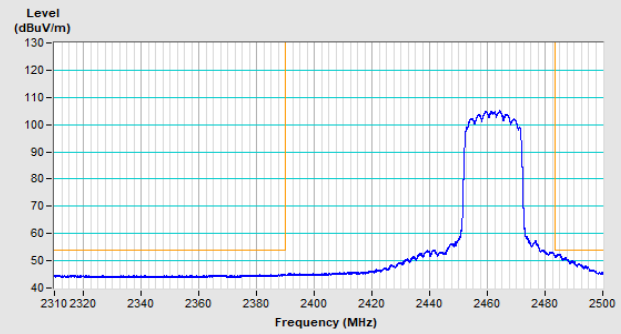

Horizontal (Average)

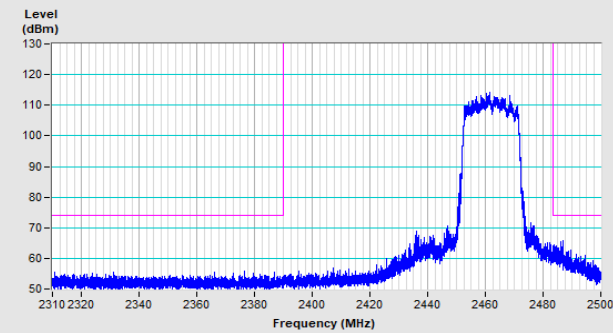


Vertical (Peak)

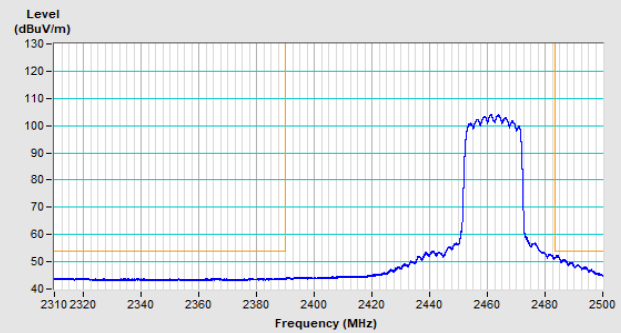


Vertical (Average)


802.11be (EHT20) Channel 12

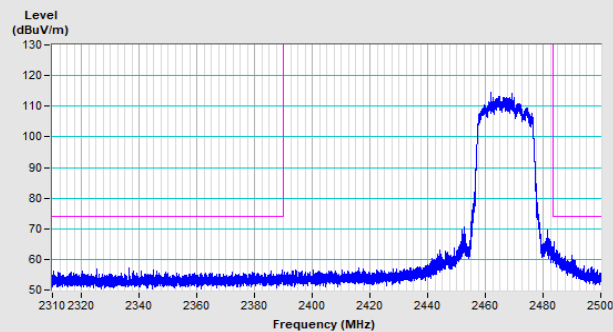


Horizontal (Peak)

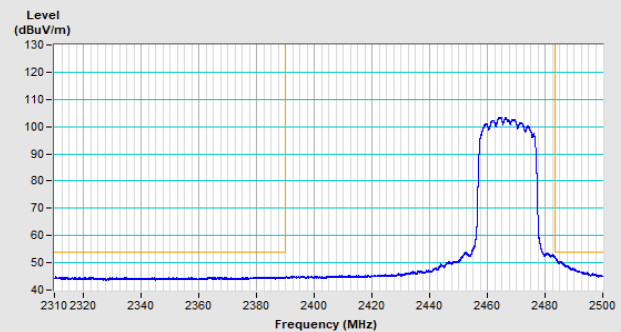

Horizontal (Average)

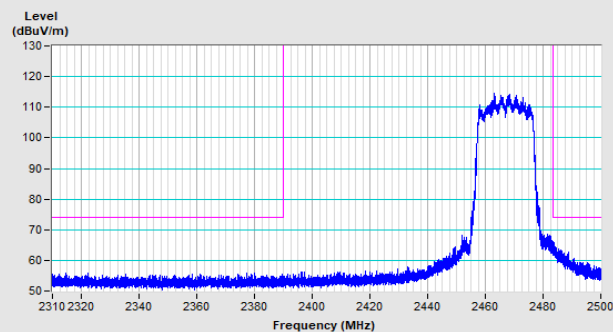


Vertical (Peak)

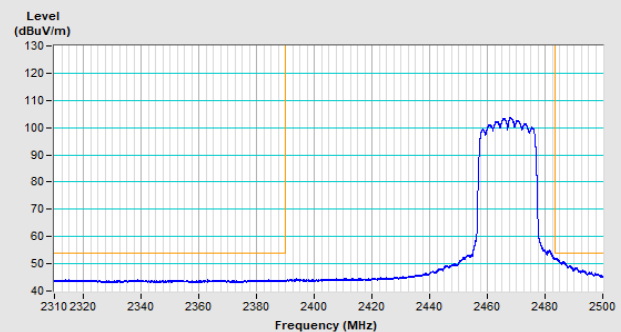


Vertical (Average)


802.11be (EHT20) Channel 13

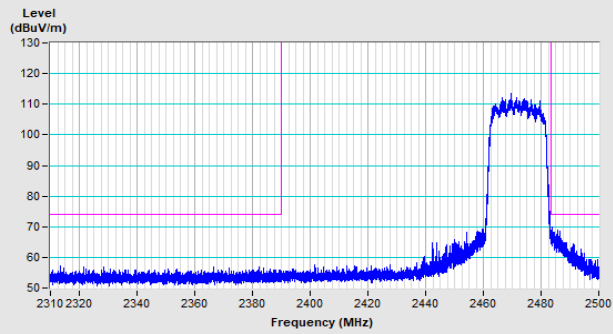


Horizontal (Peak)

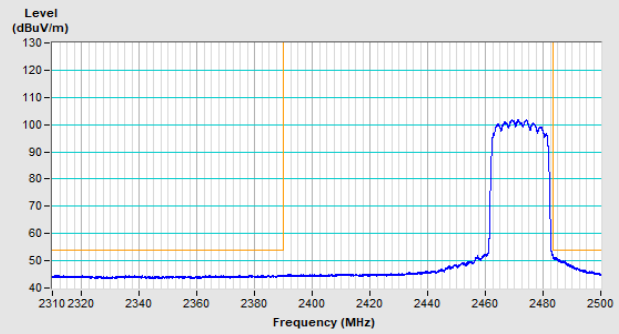

Horizontal (Average)

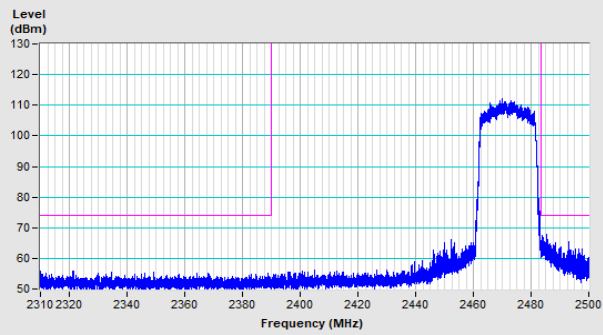


Vertical (Peak)

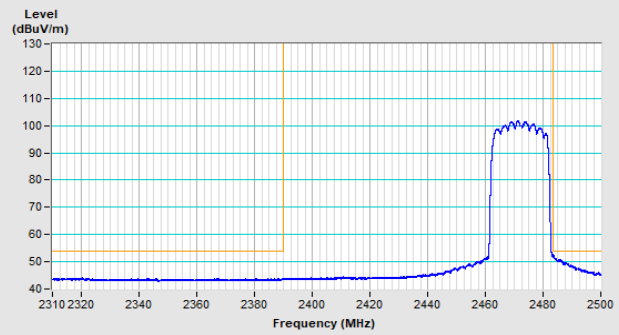


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

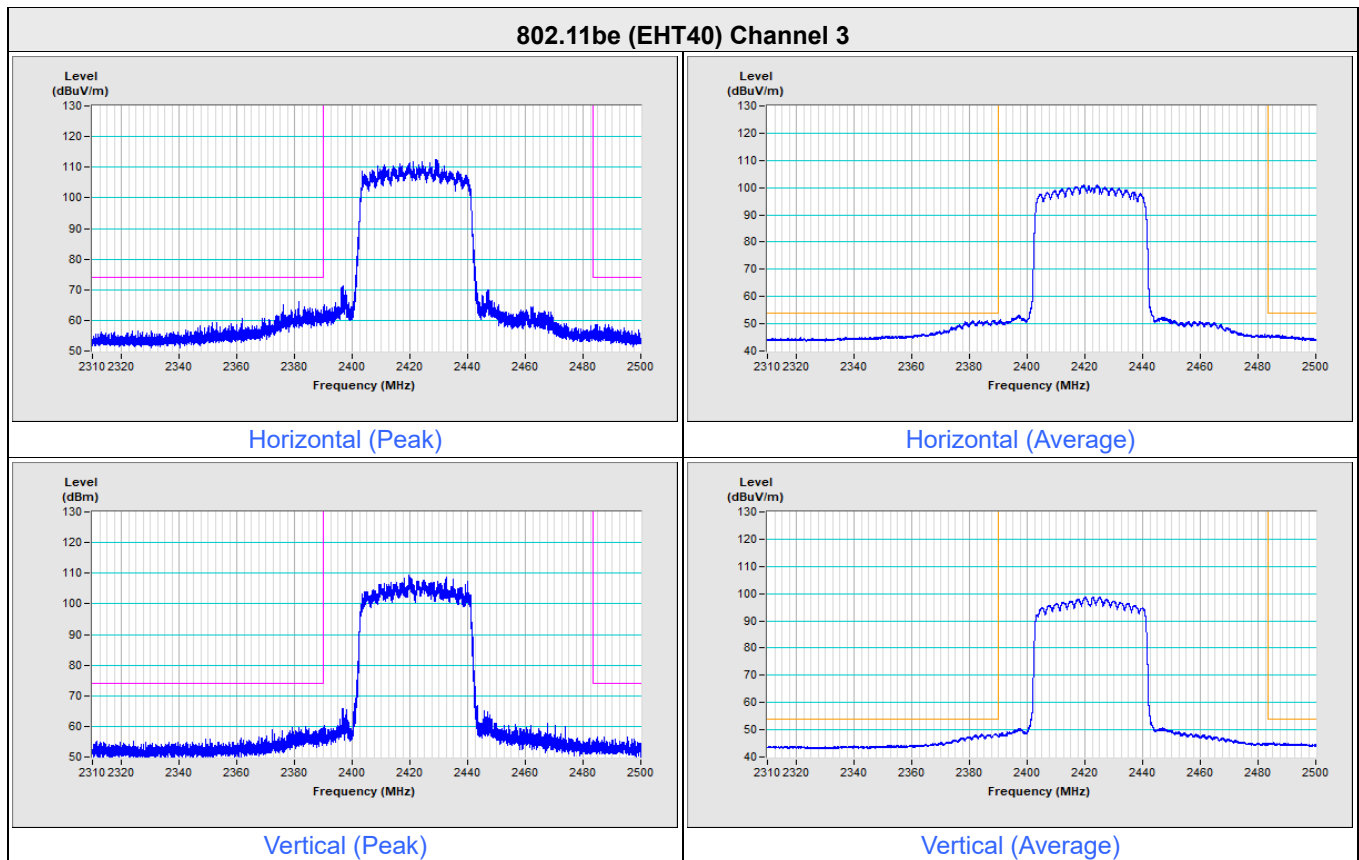


802.11be (EHT40) Channel 9

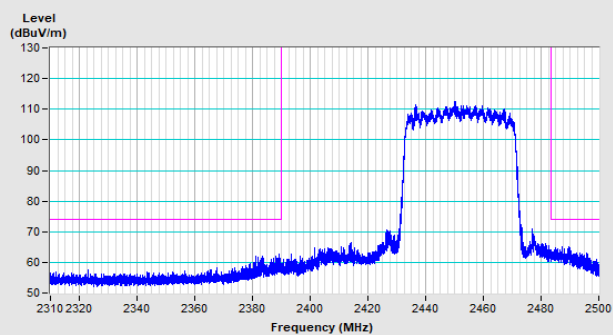


Horizontal (Peak)

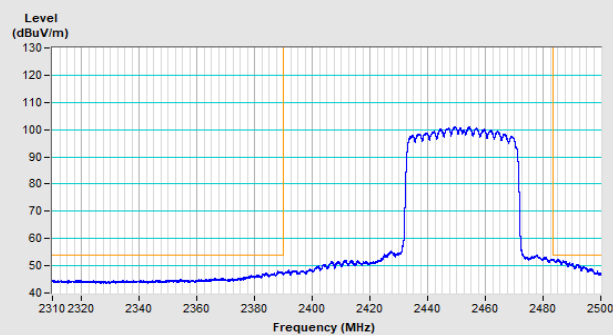

Horizontal (Average)

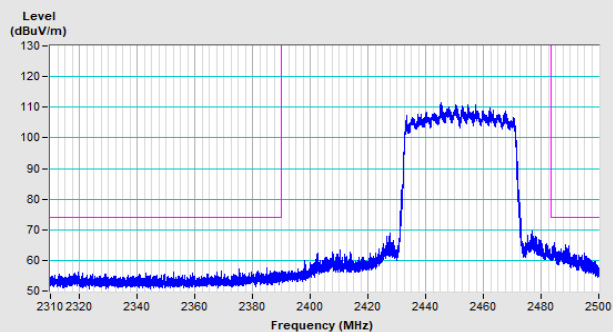


Vertical (Peak)

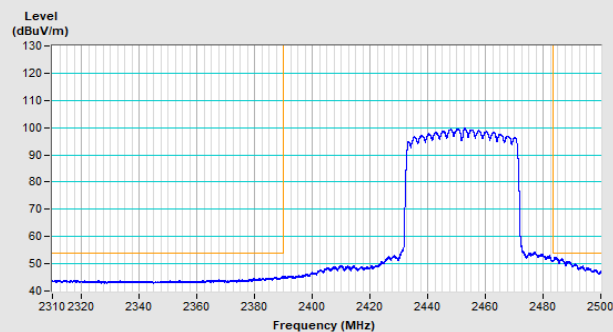


Vertical (Average)


802.11be (EHT40) Channel 10

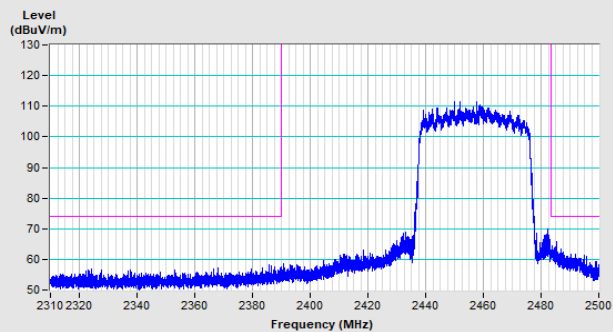


Horizontal (Peak)

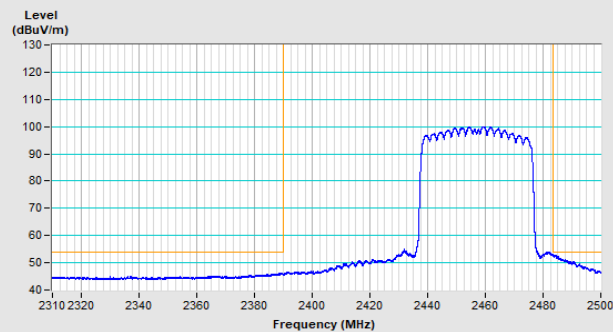

Horizontal (Average)

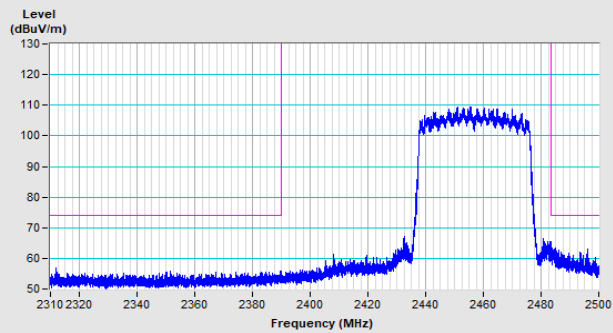


Vertical (Peak)

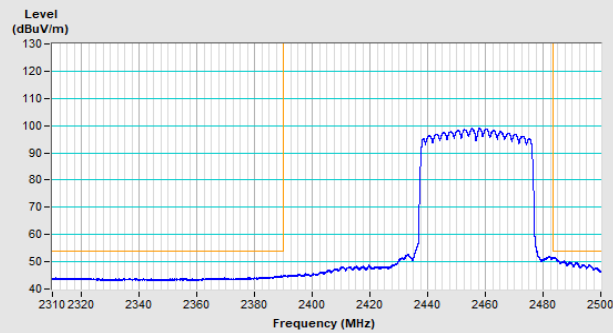


Vertical (Average)


802.11be (EHT40) Channel 11

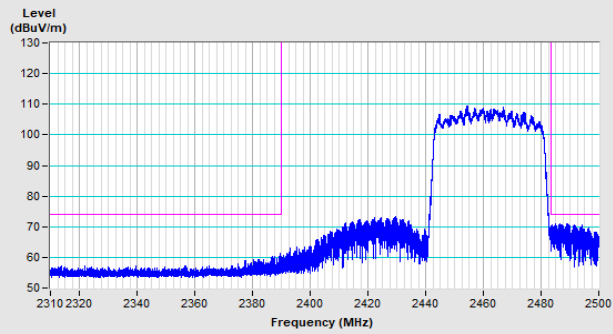


Horizontal (Peak)

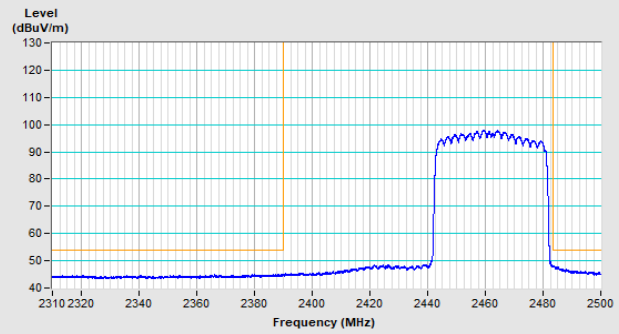

Horizontal (Average)

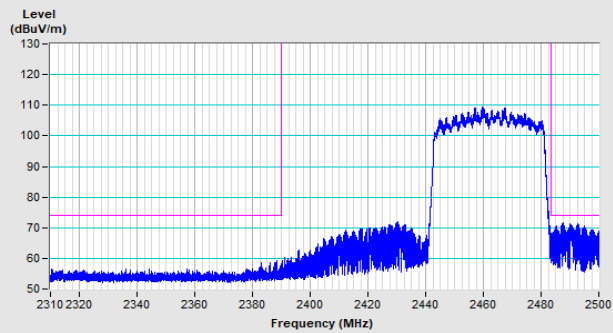


Vertical (Peak)

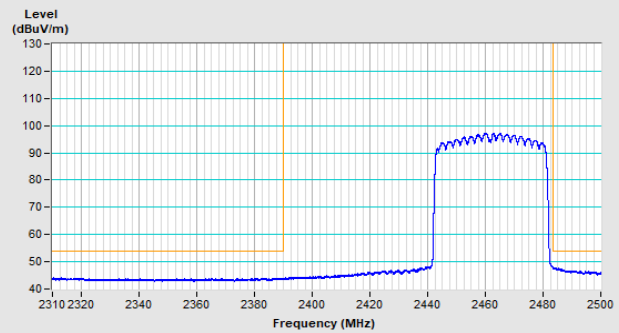


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

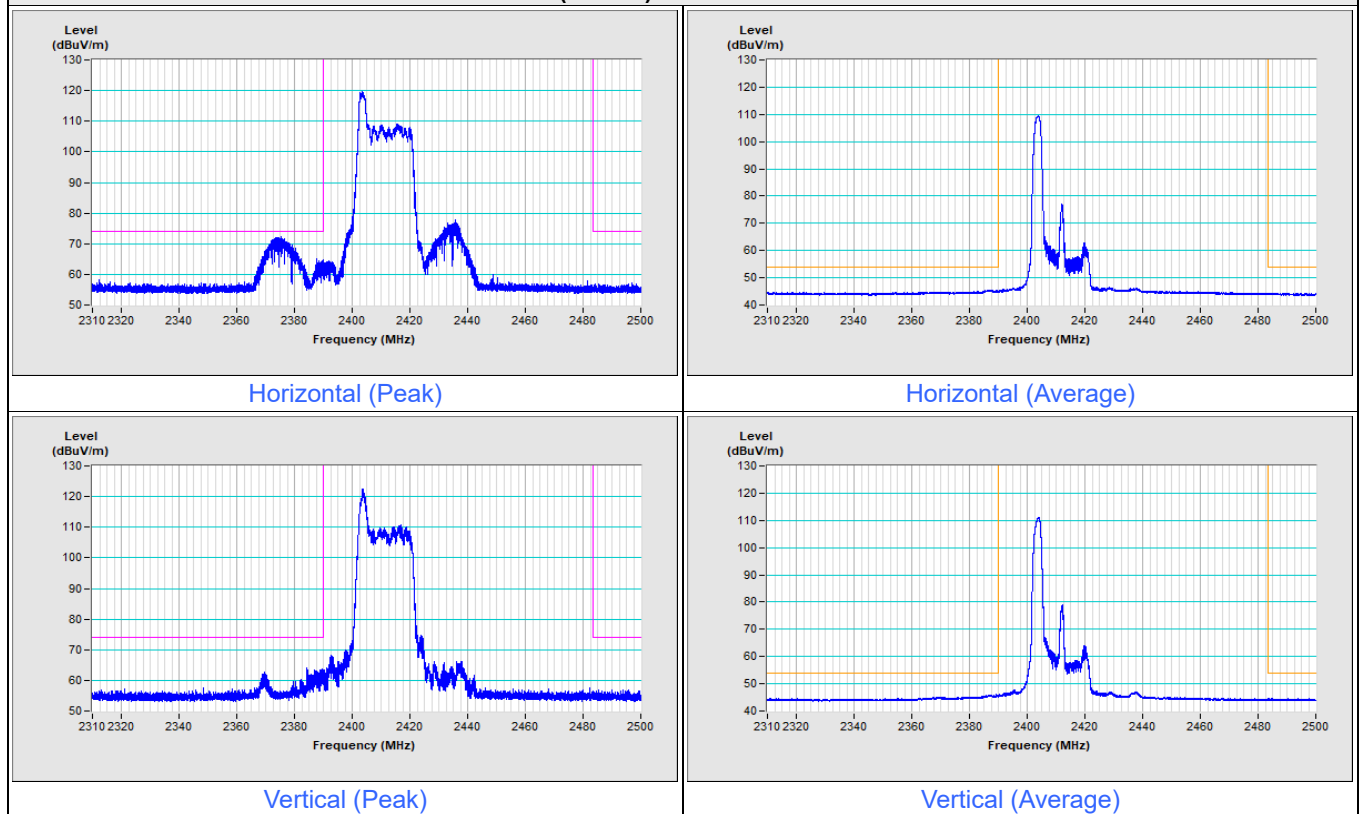


802.11be (EHT20) 26-tone RU Channel 2

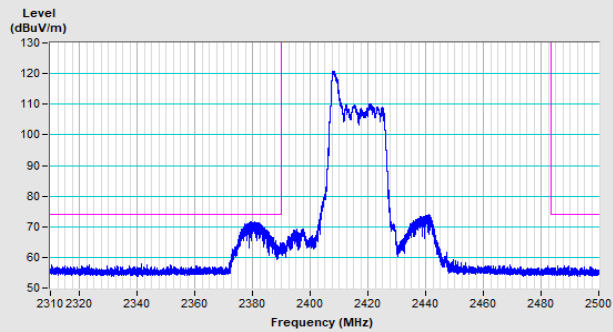


Horizontal (Peak)

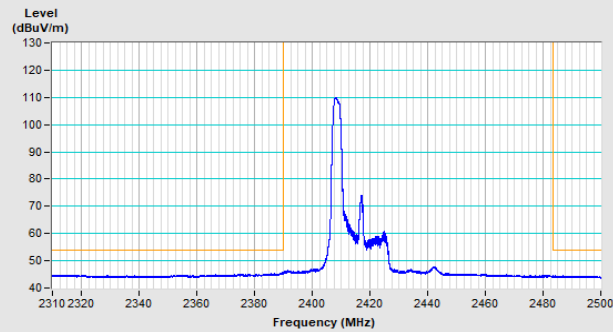

Horizontal (Average)

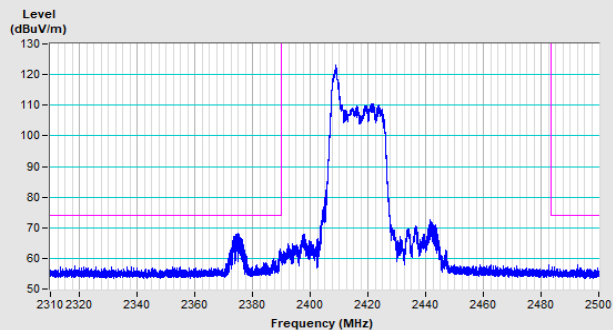


Vertical (Peak)

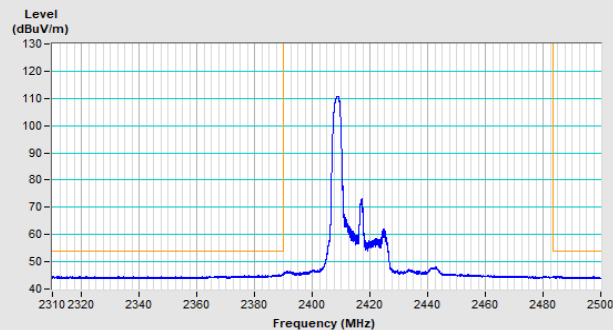


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 10

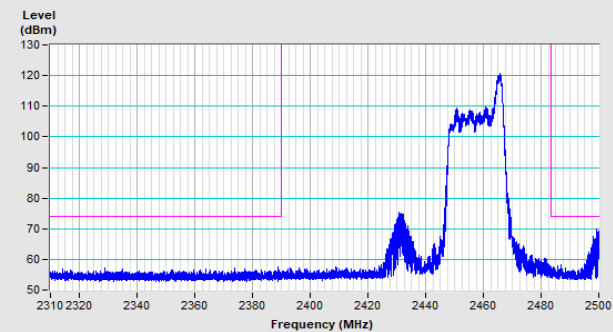


Horizontal (Peak)

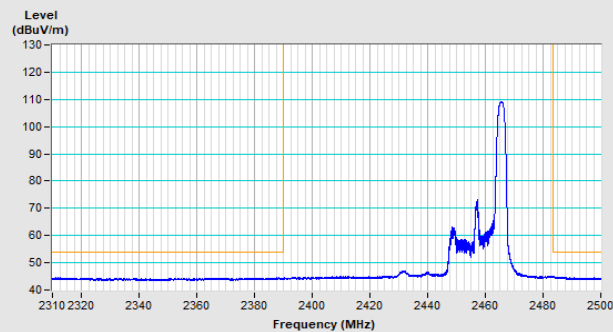

Horizontal (Average)

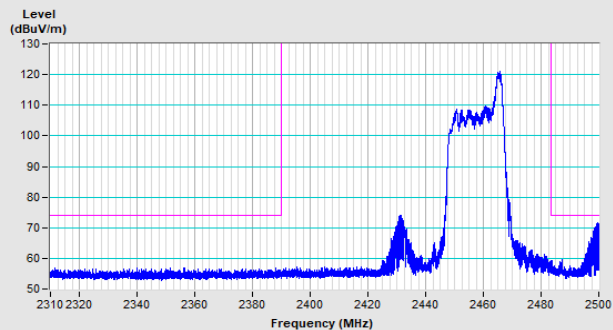


Vertical (Peak)

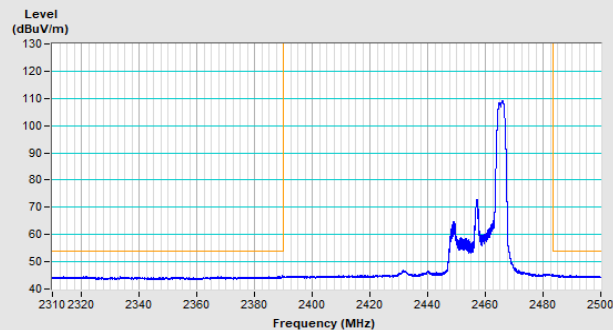


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 11

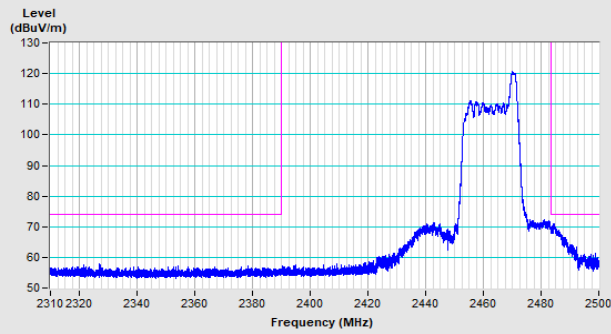


Horizontal (Peak)

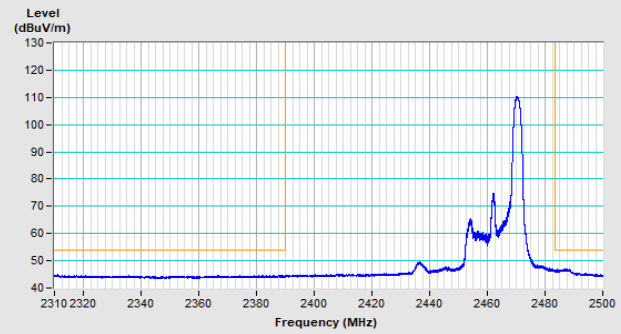

Horizontal (Average)

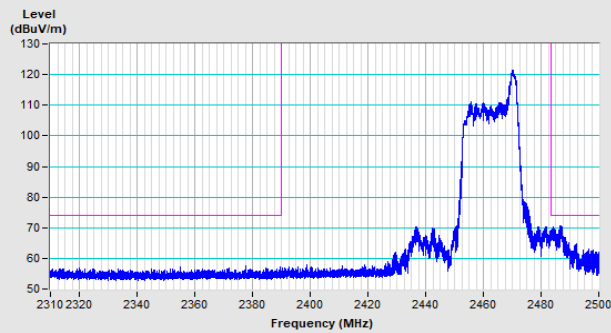


Vertical (Peak)

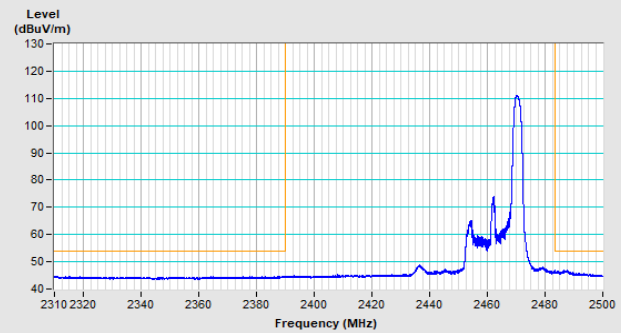


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

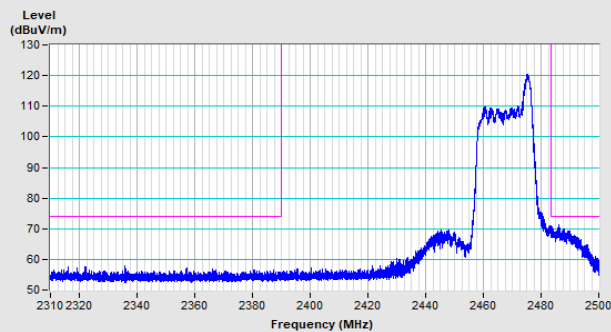


Horizontal (Peak)

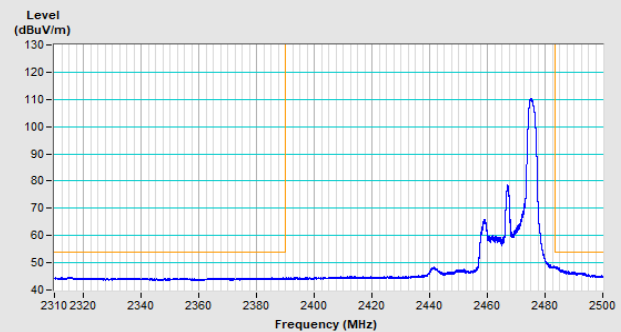

Horizontal (Average)

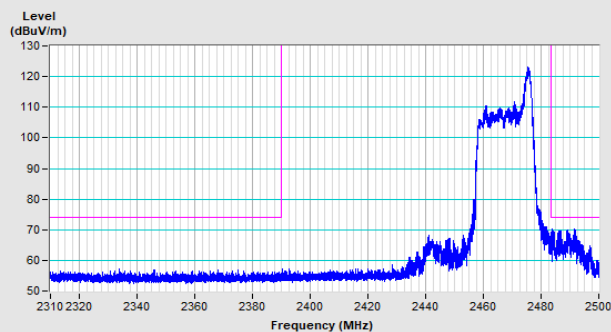


Vertical (Peak)

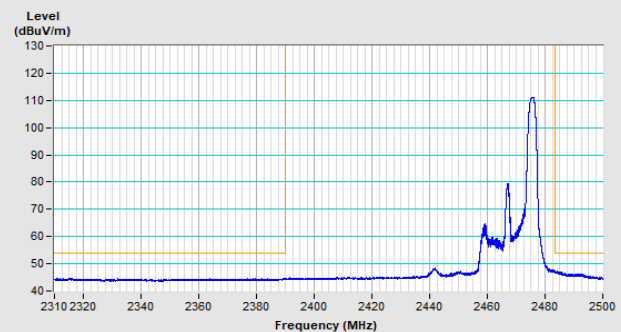


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

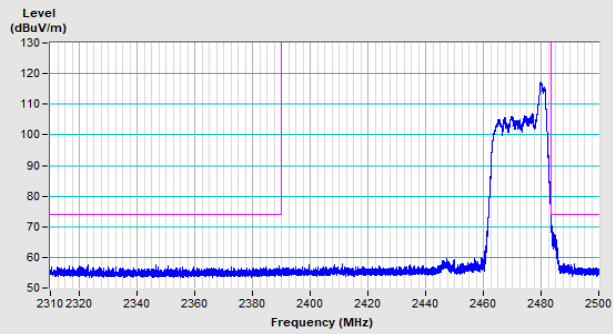


Horizontal (Peak)

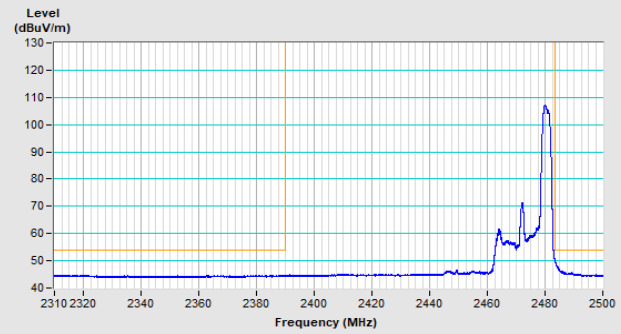

Horizontal (Average)

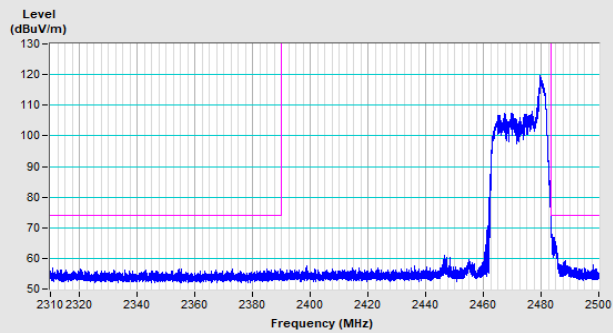


Vertical (Peak)

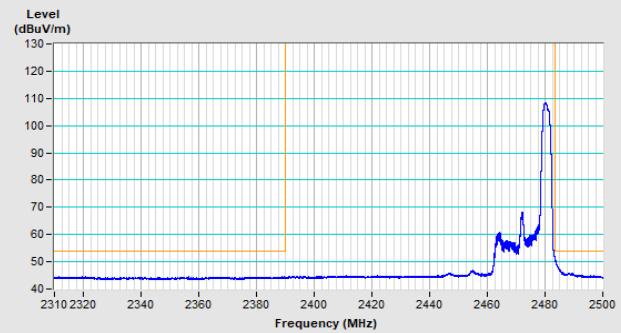


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

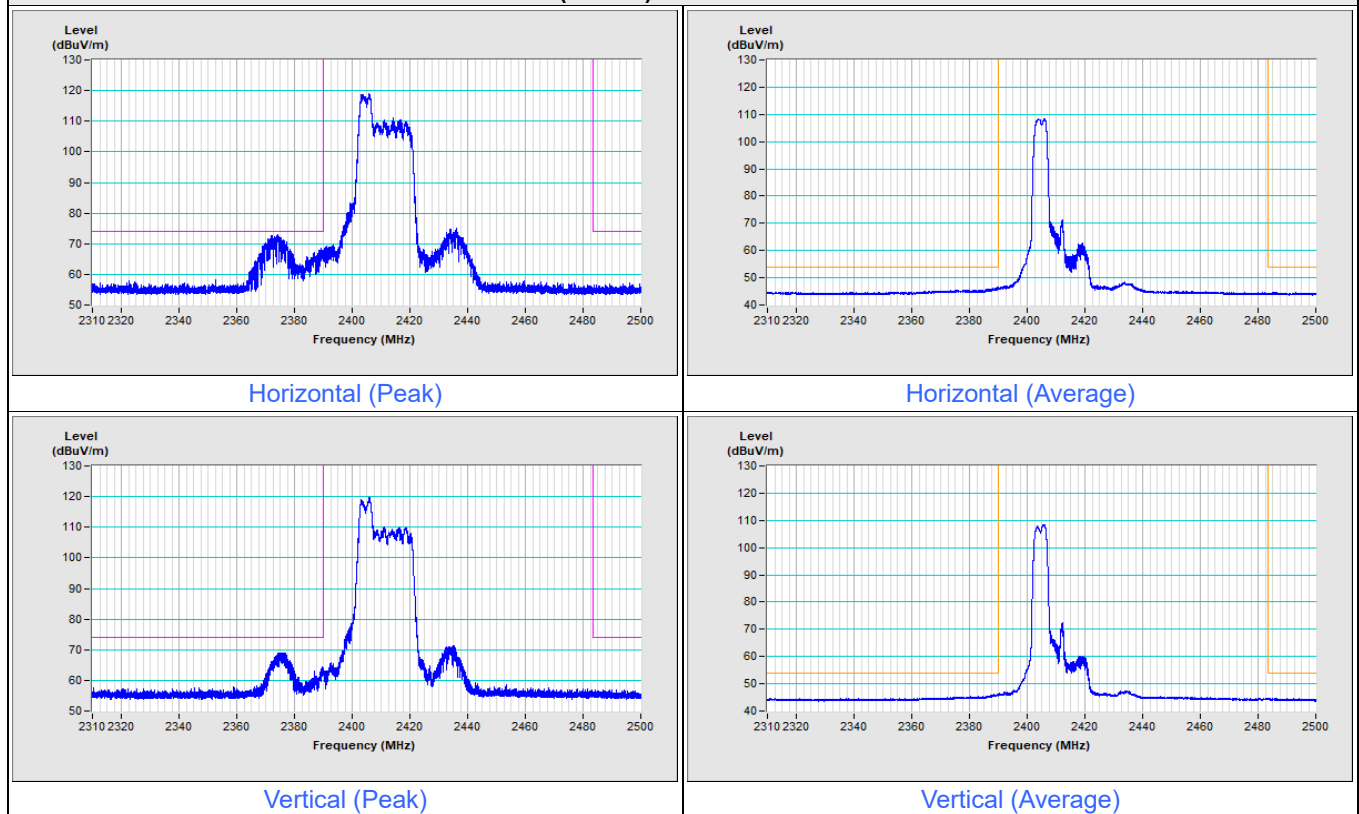


802.11be (EHT20) 52-tone RU Channel 2

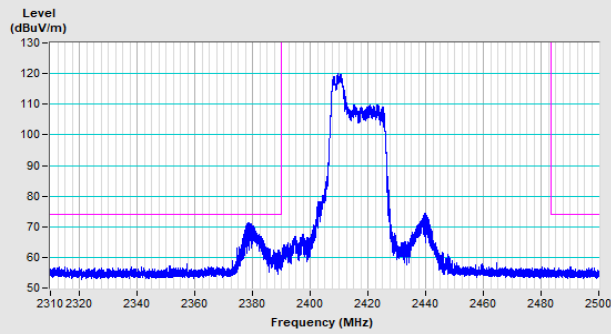


Horizontal (Peak)

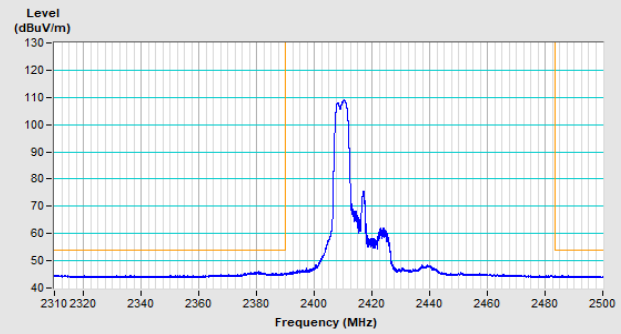

Horizontal (Average)

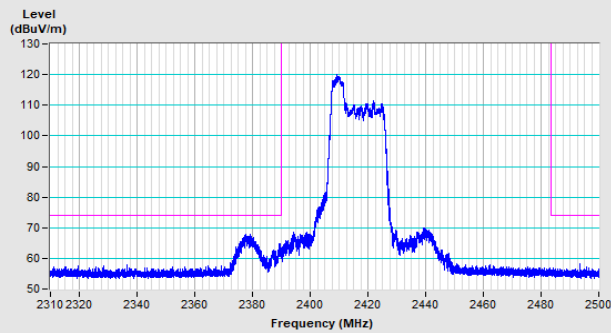


Vertical (Peak)

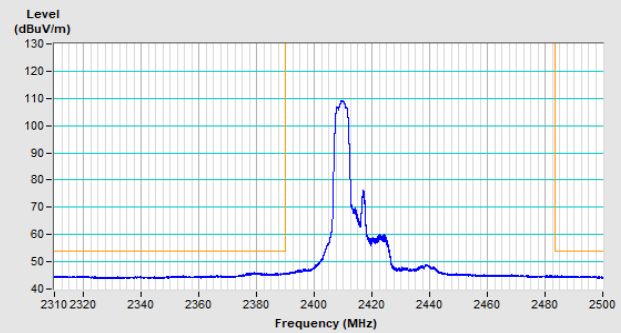


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 10

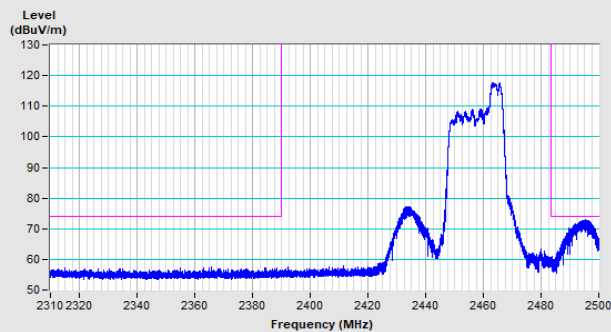


Horizontal (Peak)

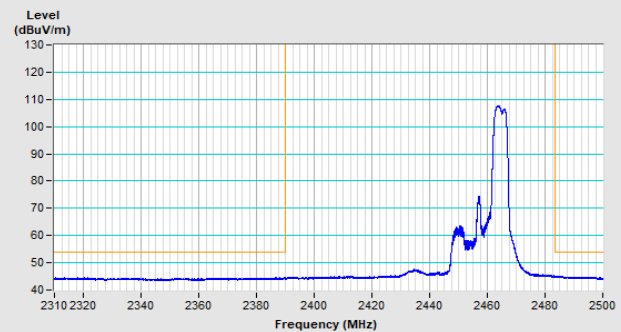

Horizontal (Average)

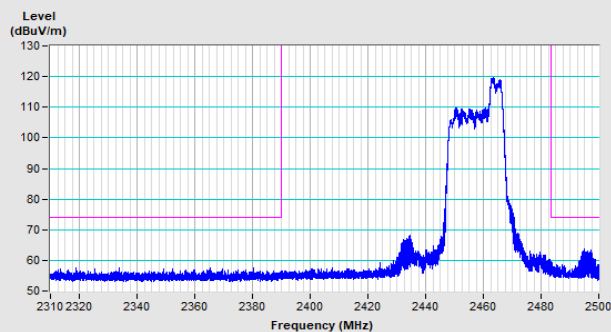


Vertical (Peak)

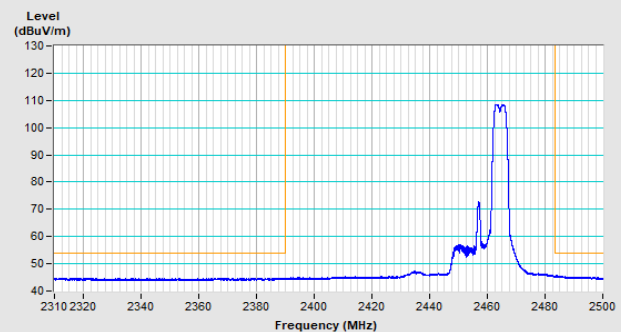


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 11

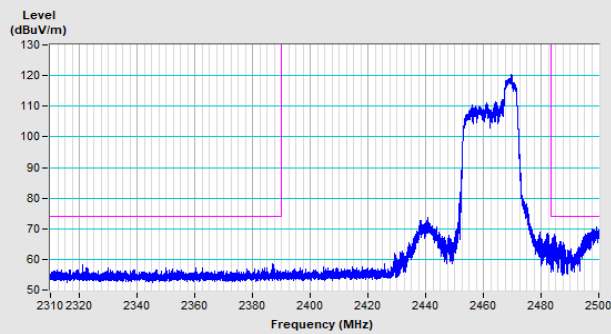


Horizontal (Peak)

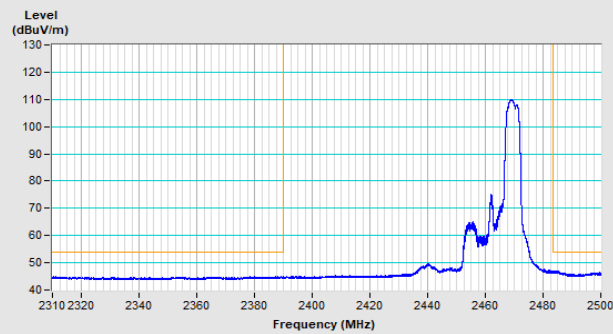

Horizontal (Average)

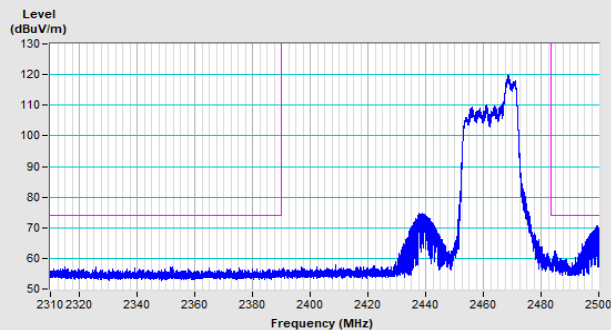


Vertical (Peak)

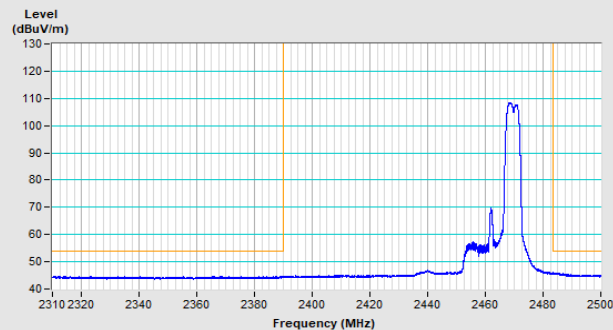


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

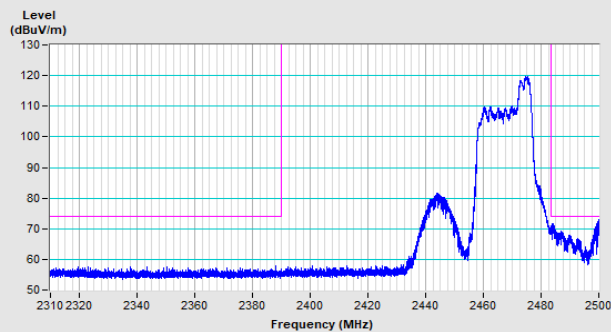


Horizontal (Peak)

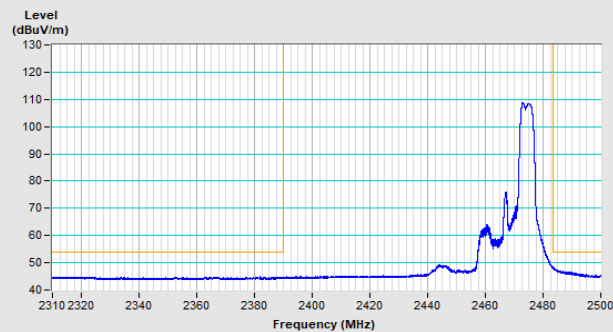

Horizontal (Average)

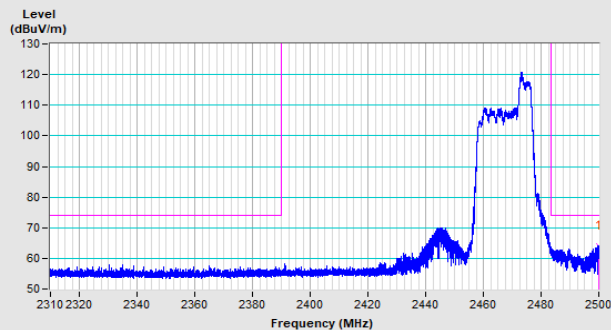


Vertical (Peak)

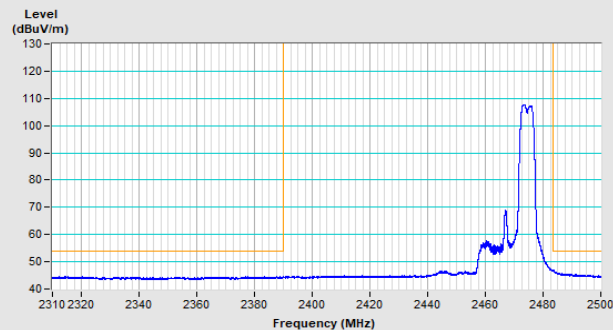


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

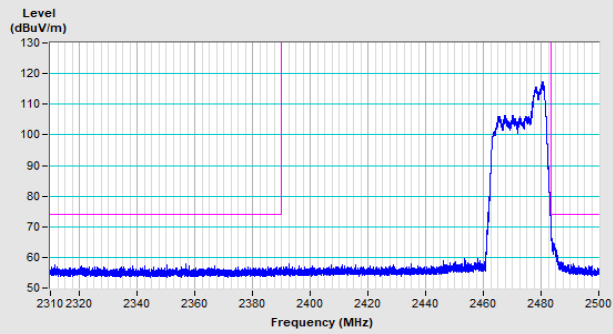


Horizontal (Peak)

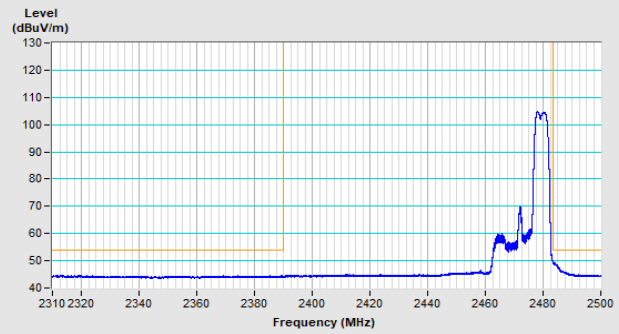

Horizontal (Average)

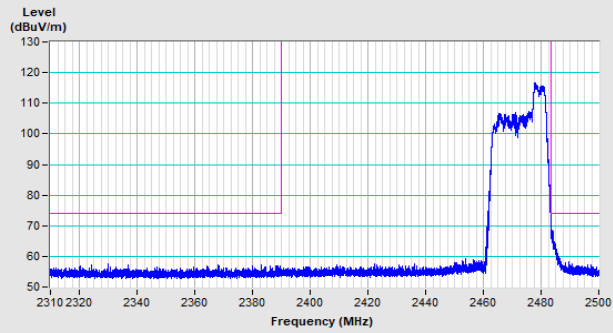


Vertical (Peak)

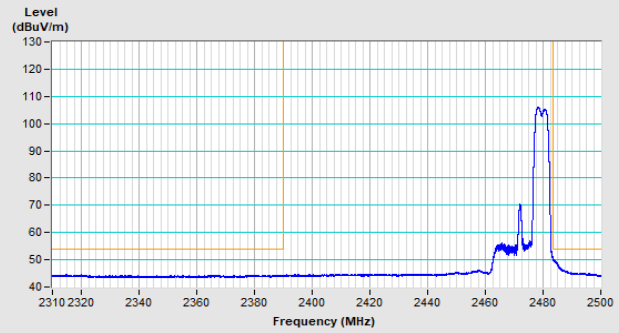


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

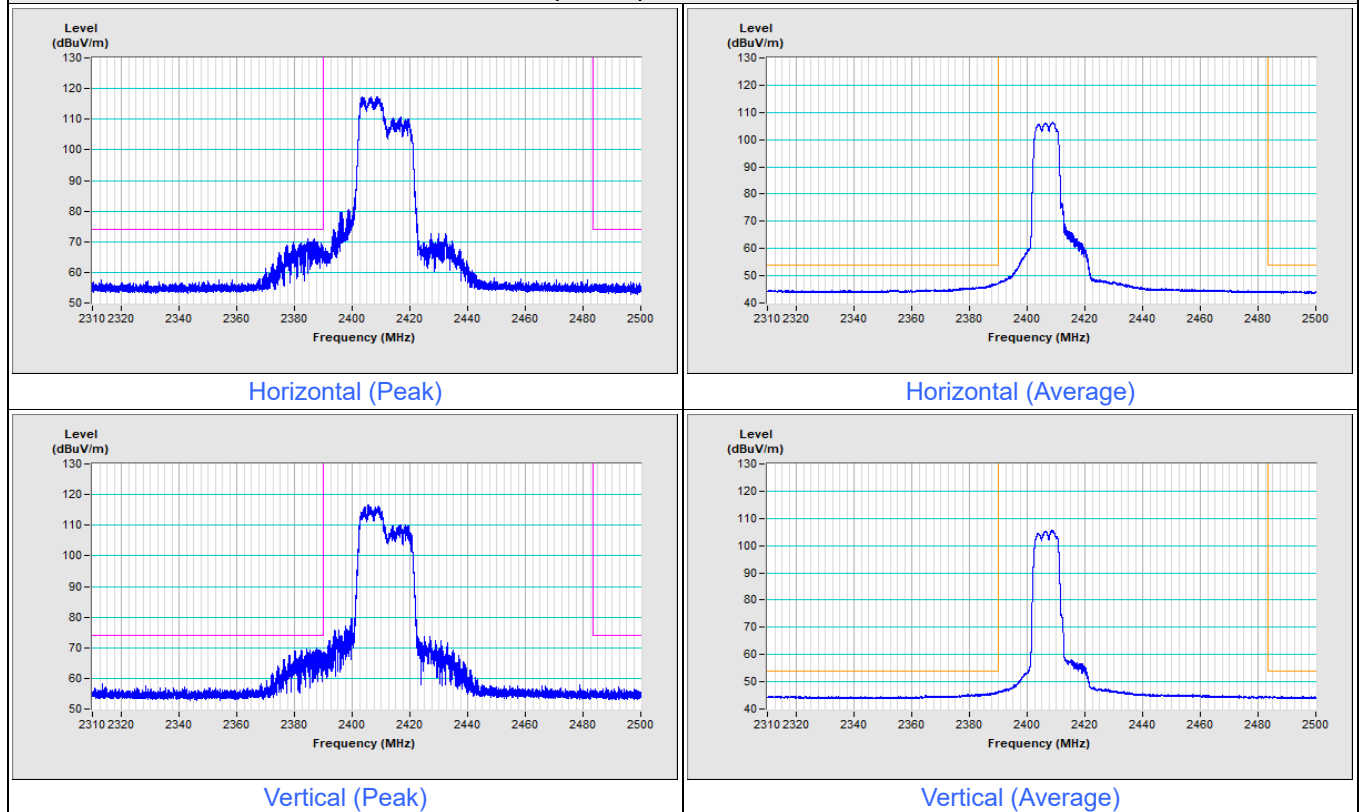


802.11be (EHT20) 106-tone RU Channel 2

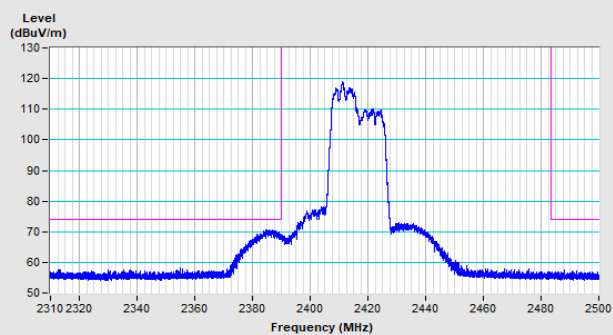


Horizontal (Peak)

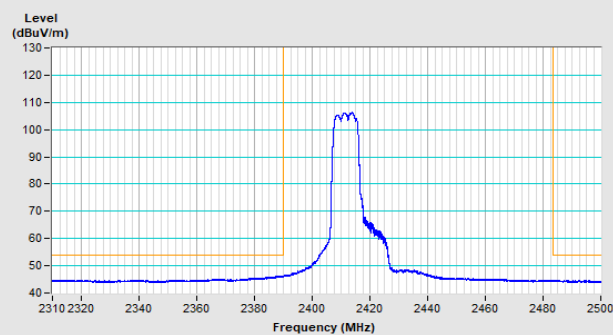

Horizontal (Average)

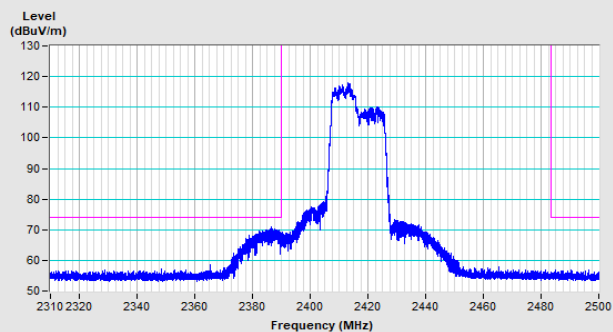


Vertical (Peak)

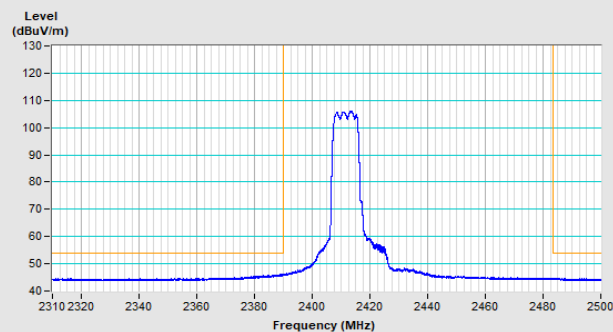


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 10

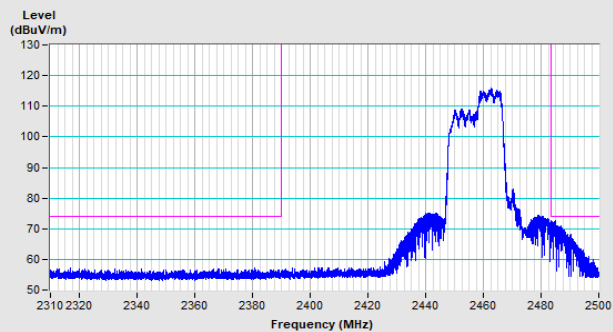


Horizontal (Peak)

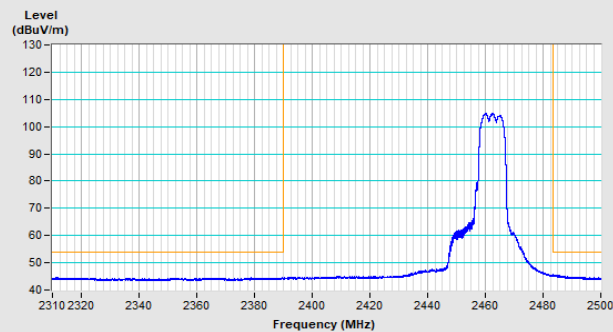

Horizontal (Average)

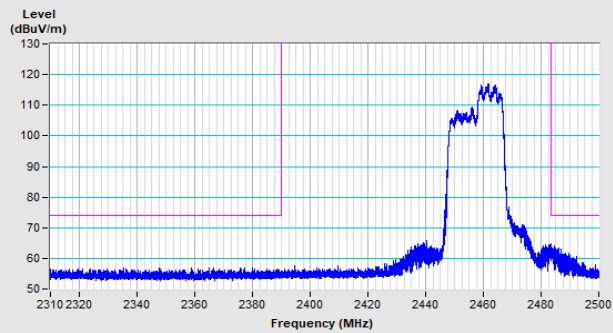


Vertical (Peak)

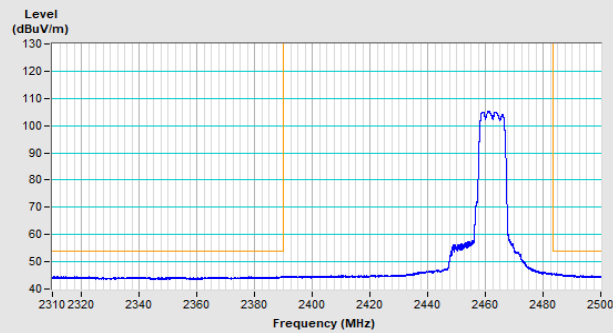


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 11

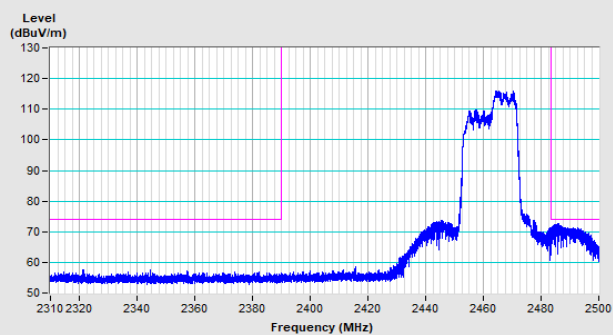


Horizontal (Peak)

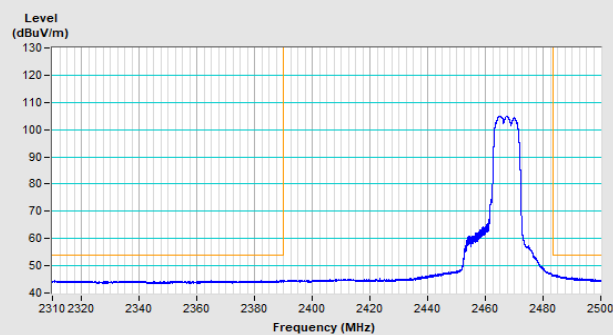

Horizontal (Average)

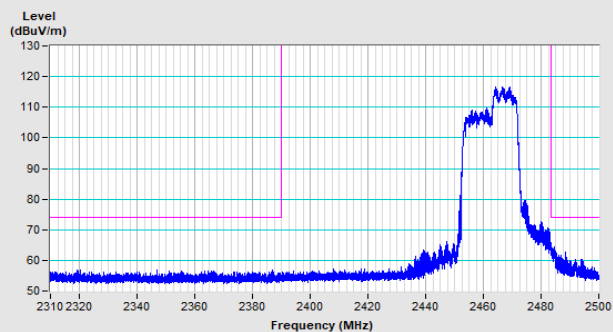


Vertical (Peak)

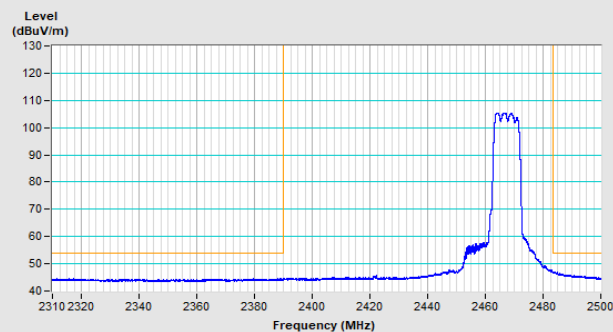


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

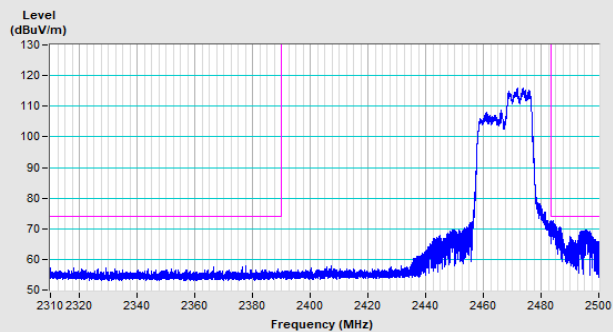


Horizontal (Peak)

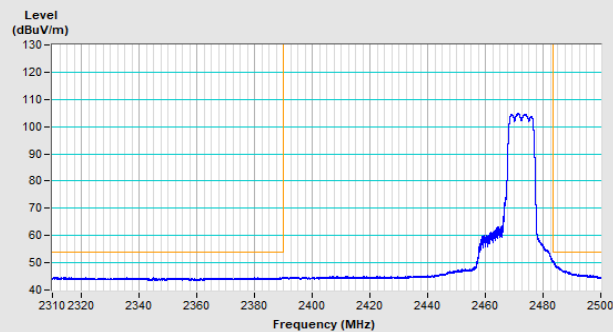

Horizontal (Average)

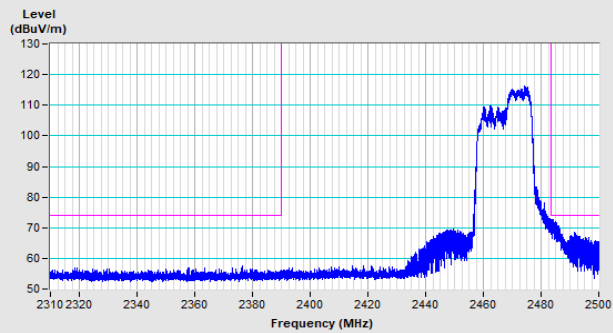


Vertical (Peak)

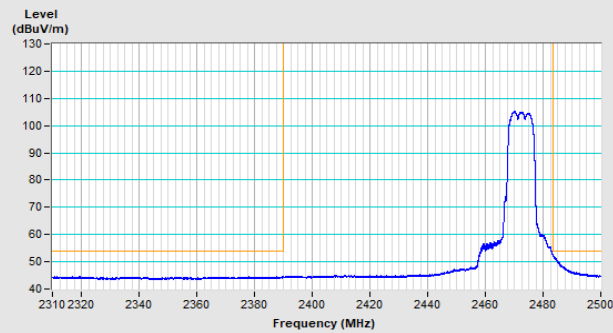


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

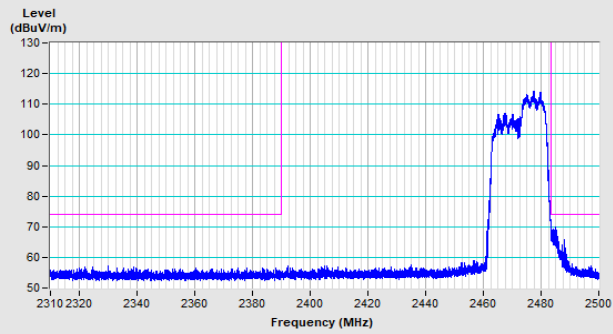


Horizontal (Peak)

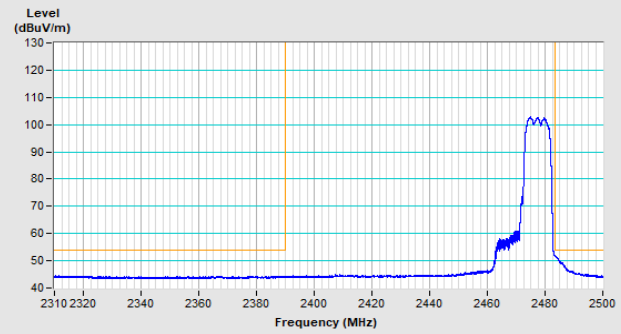

Horizontal (Average)

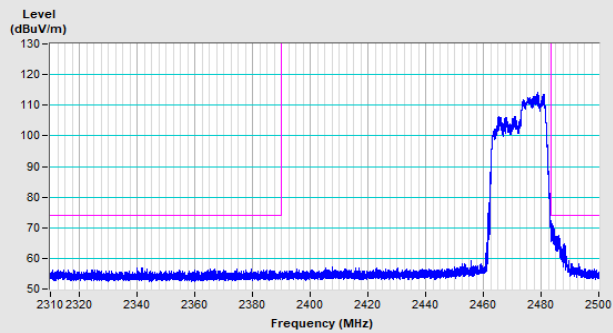

Vertical (Peak)

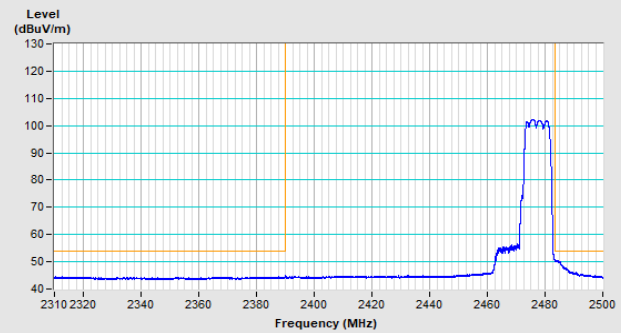

Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 1

