




802.11be (EHT20) 52+26-tone MRU Channel 2

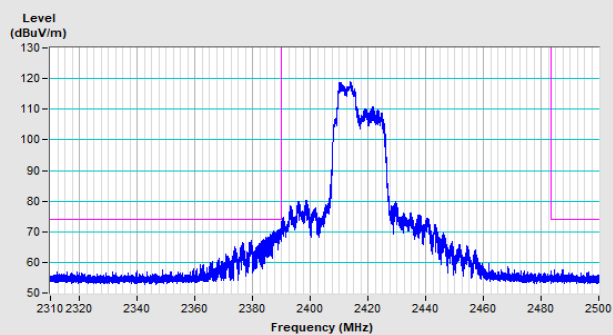


Horizontal (Peak)

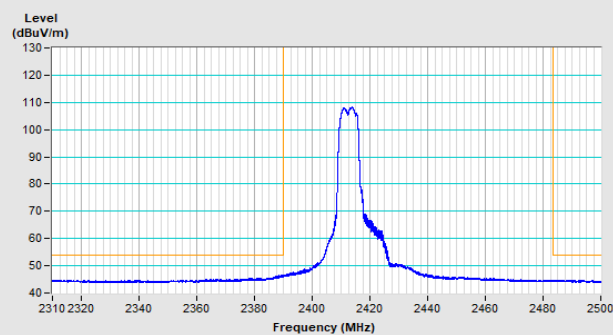

Horizontal (Average)

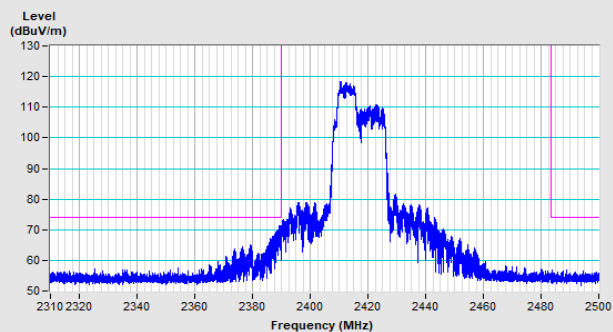


Vertical (Peak)

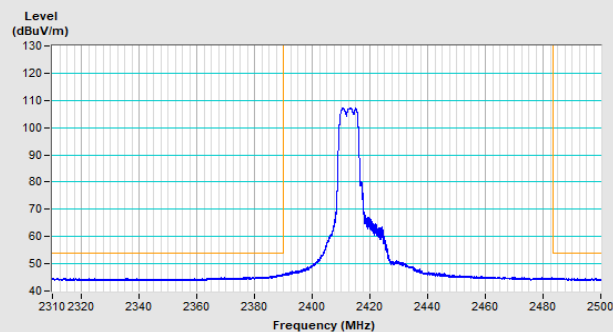


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 10

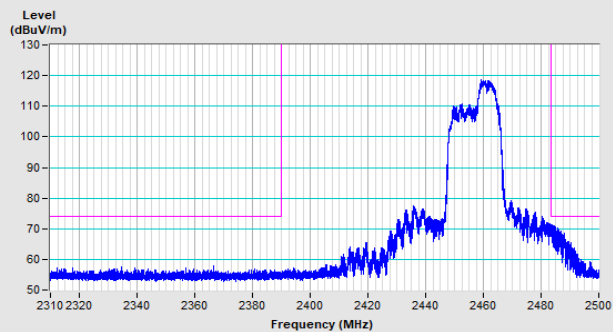


Horizontal (Peak)

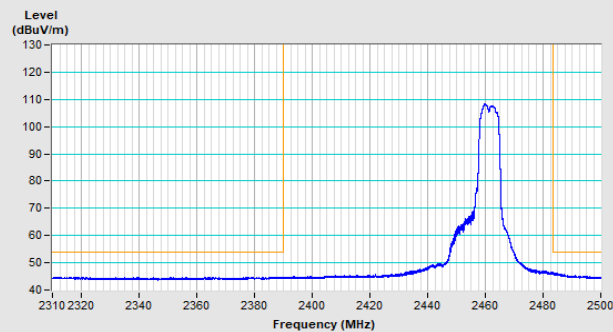

Horizontal (Average)

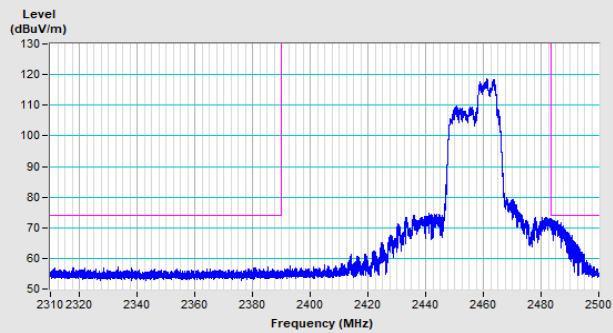


Vertical (Peak)

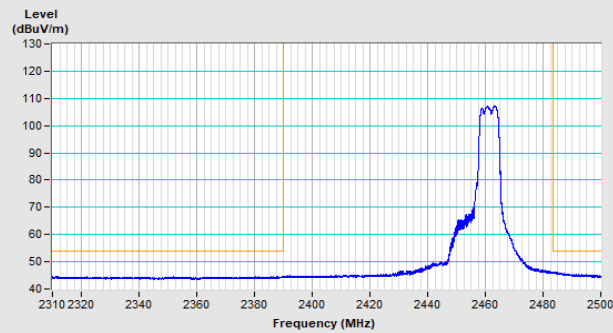


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 11

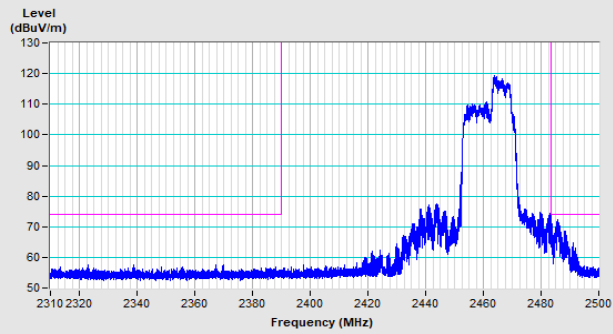


Horizontal (Peak)

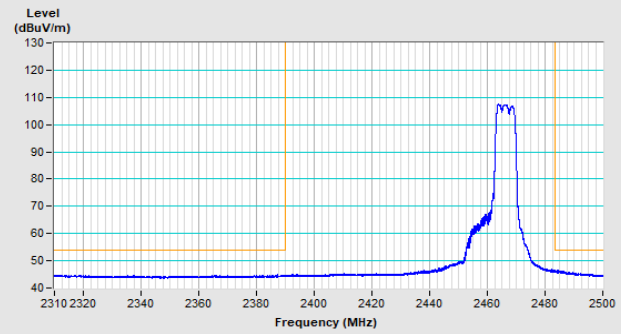

Horizontal (Average)

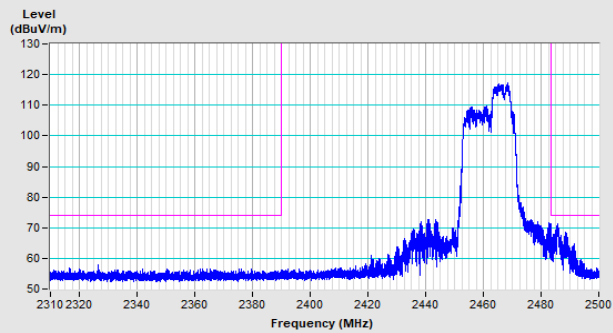


Vertical (Peak)

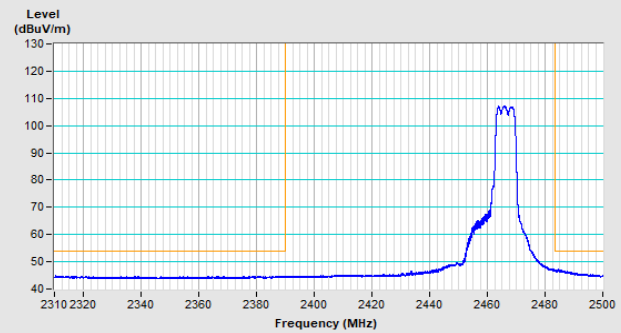


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 12

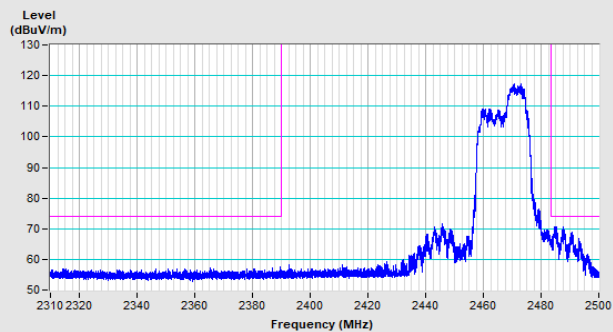


Horizontal (Peak)

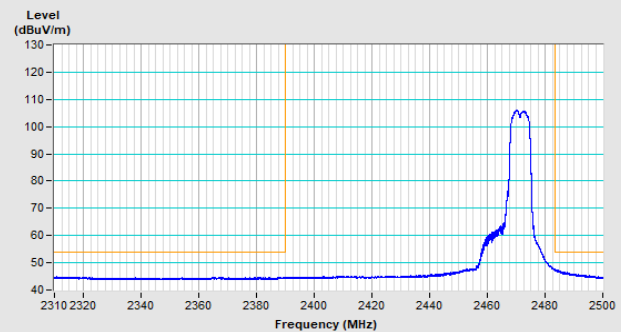

Horizontal (Average)

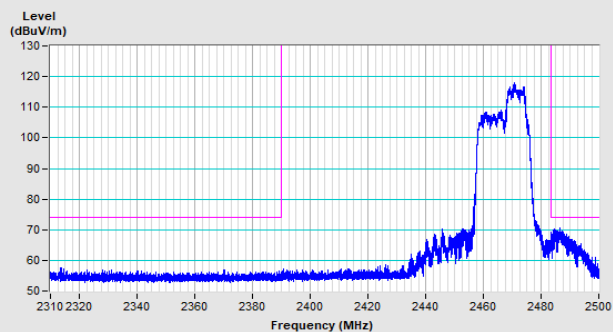


Vertical (Peak)

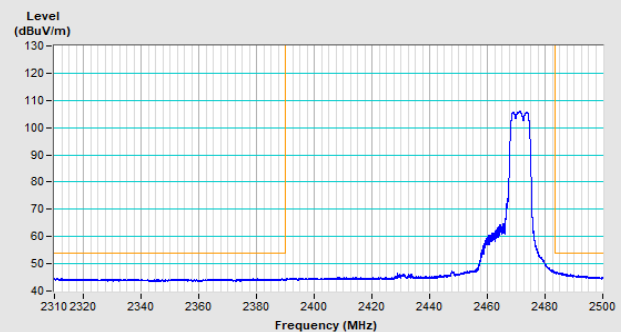


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 13

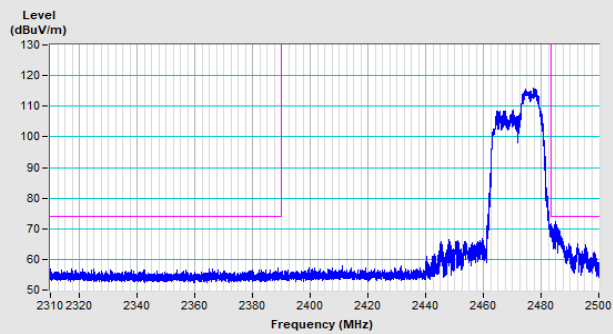


Horizontal (Peak)

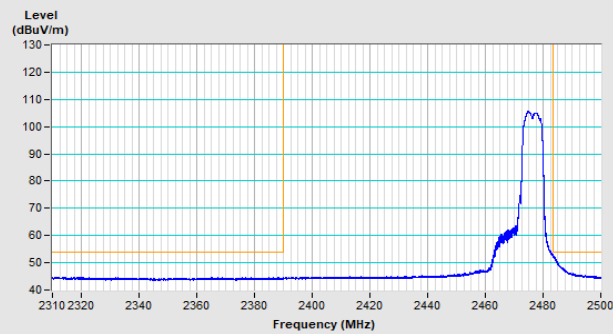

Horizontal (Average)

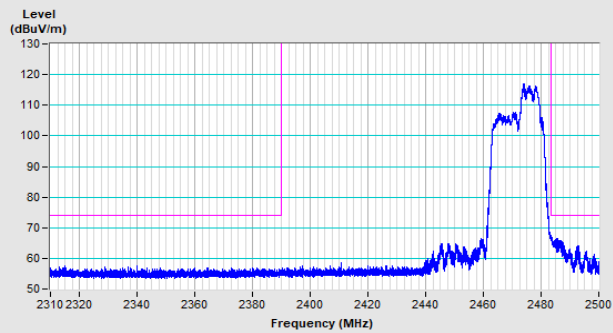


Vertical (Peak)

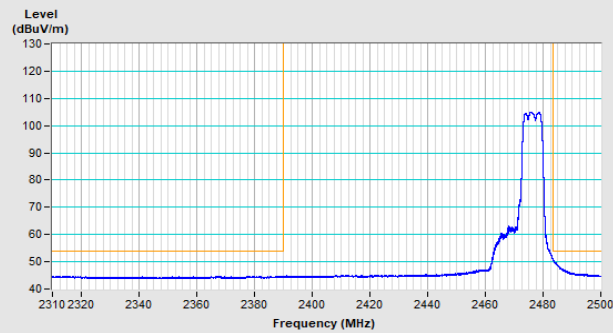


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

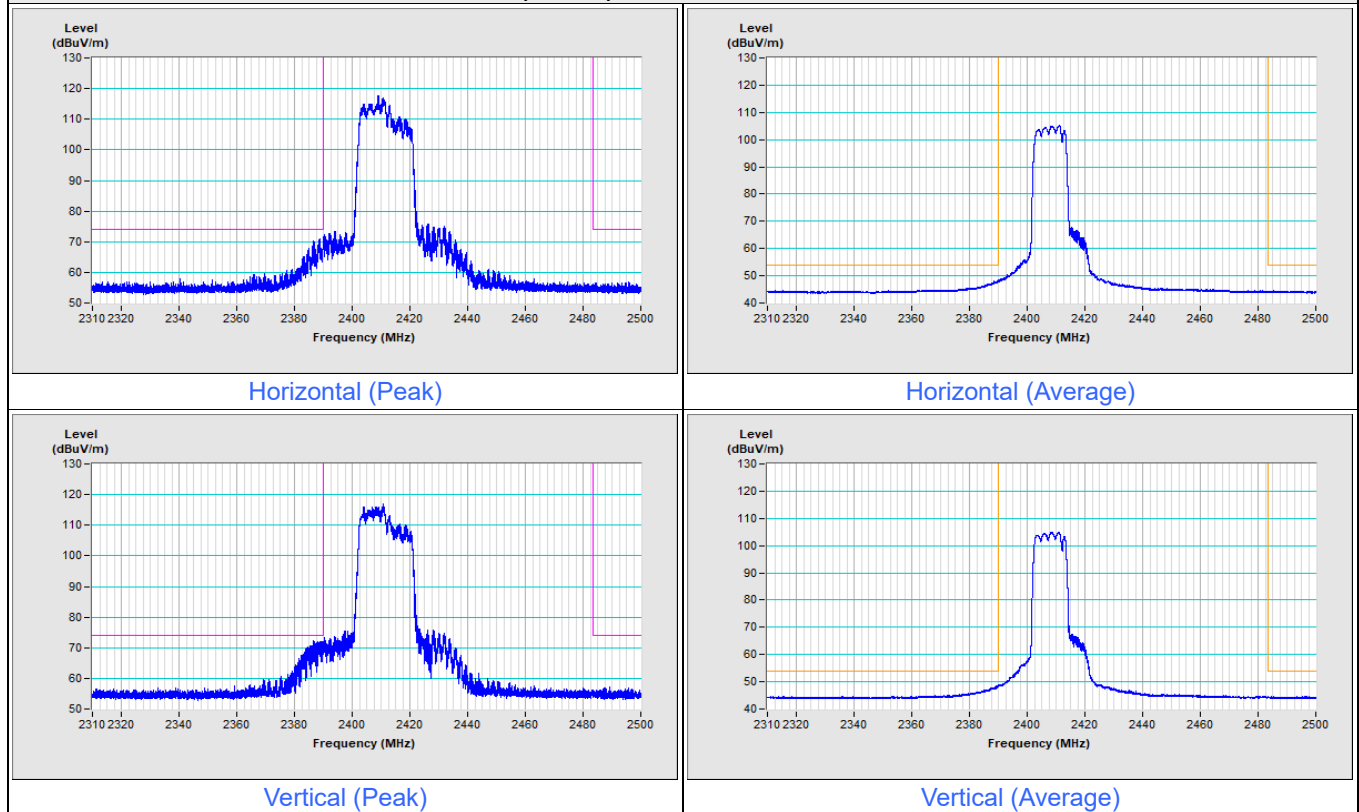


802.11be (EHT20) 106+26-tone MRU Channel 2

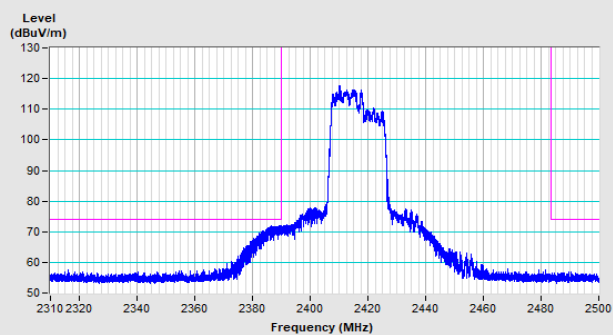


Horizontal (Peak)

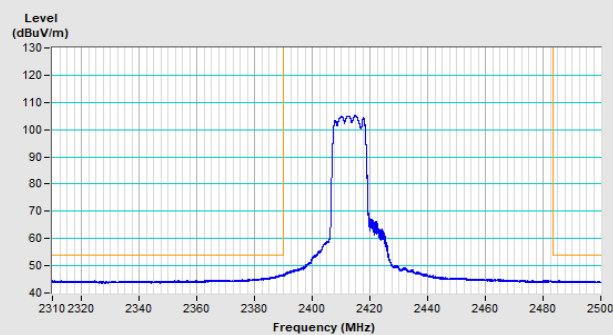

Horizontal (Average)

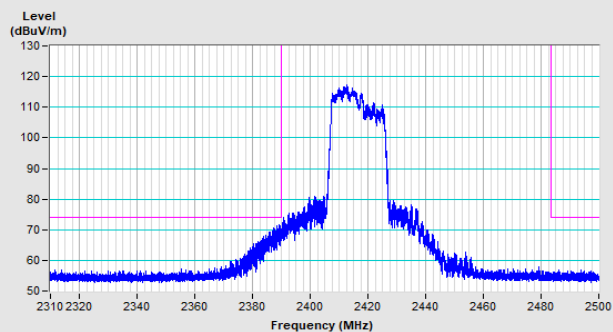


Vertical (Peak)

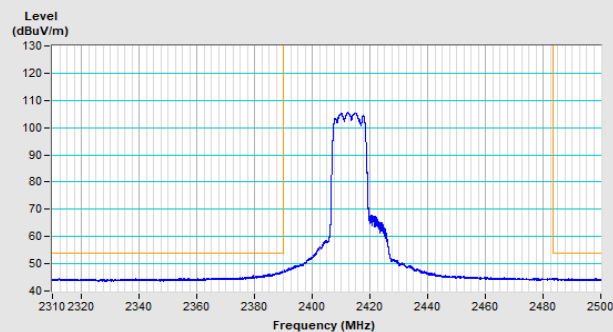


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 10

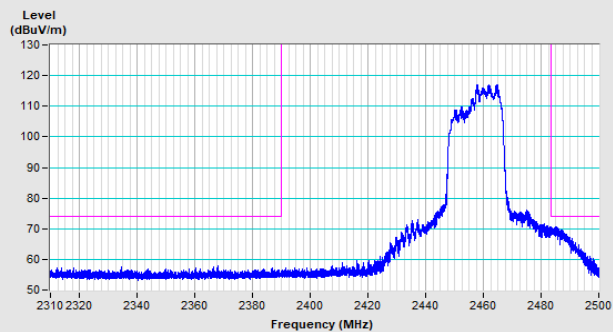


Horizontal (Peak)

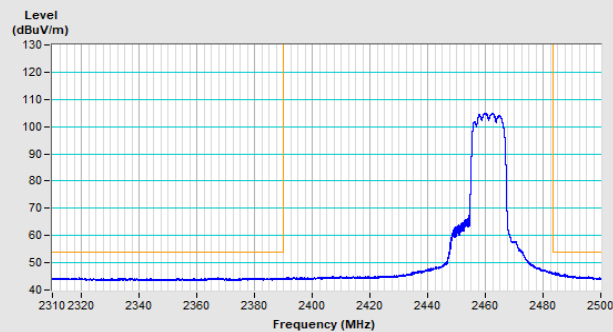

Horizontal (Average)

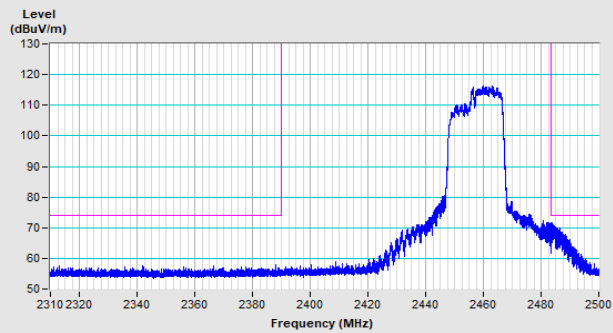


Vertical (Peak)

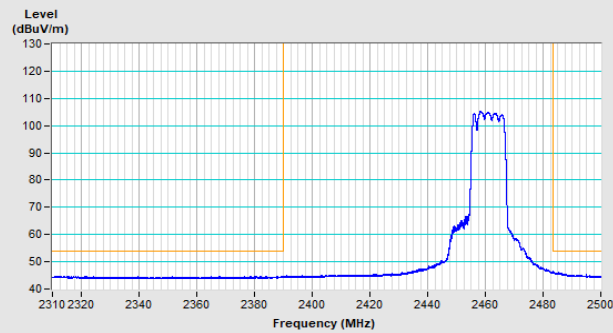


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 11

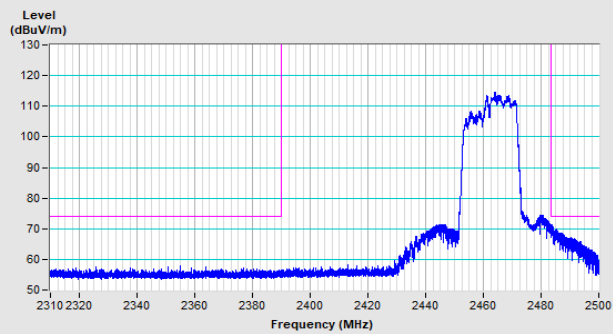


Horizontal (Peak)

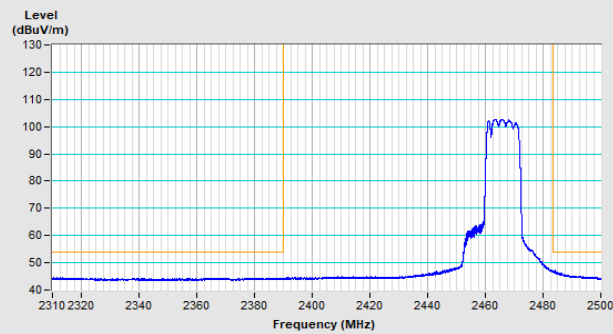

Horizontal (Average)

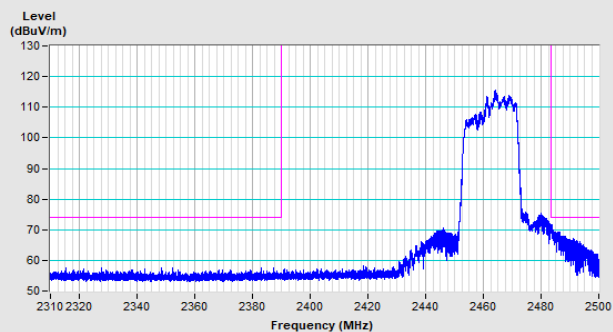


Vertical (Peak)

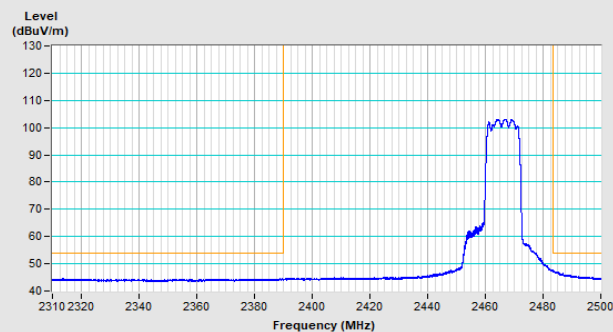


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 12

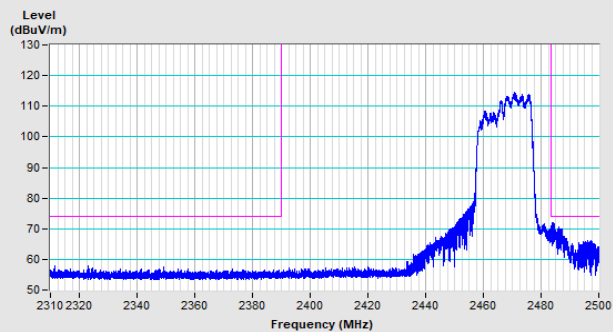


Horizontal (Peak)

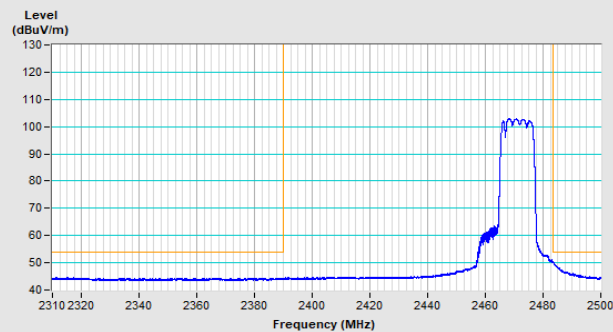

Horizontal (Average)

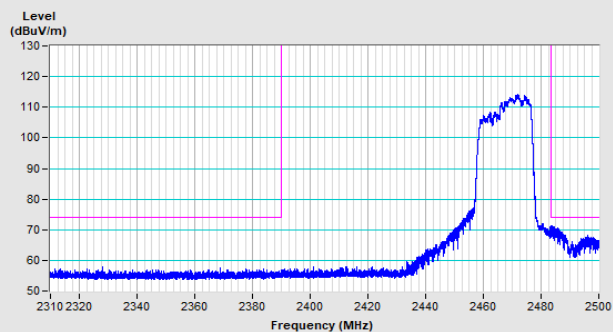


Vertical (Peak)

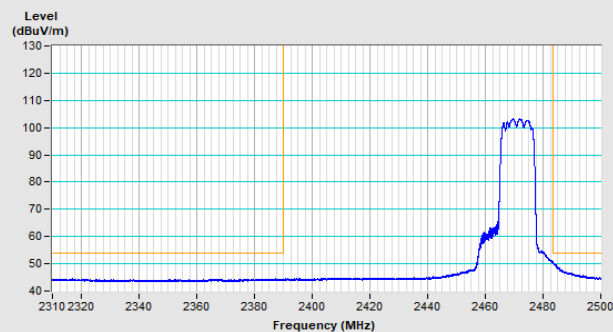


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 13

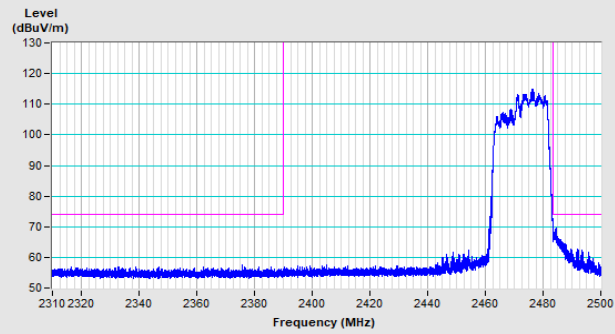


Horizontal (Peak)

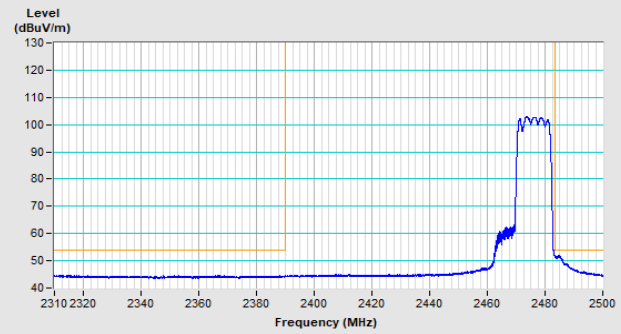

Horizontal (Average)

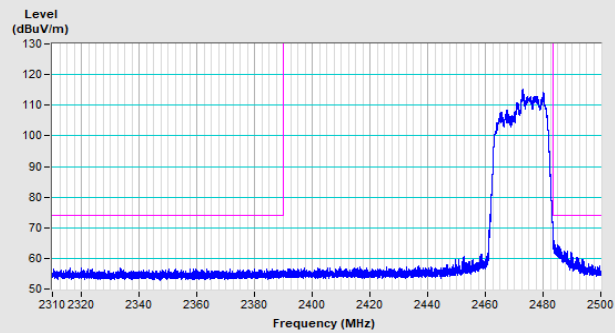

Vertical (Peak)

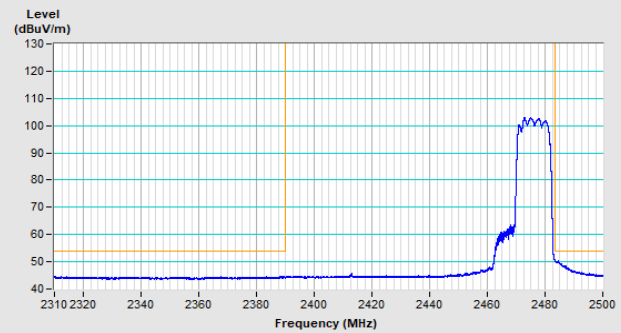

Vertical (Average)

Mode B

1Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.5 PK	74.0	-14.5	1.06 H	164	61.5	-2.0
2	2390.00	50.2 AV	54.0	-3.8	1.06 H	164	52.2	-2.0
3	*2412.00	109.2 PK			1.06 H	164	111.3	-2.1
4	*2412.00	106.9 AV			1.06 H	164	109.0	-2.1
5	4824.00	48.0 PK	74.0	-26.0	1.04 H	223	45.9	2.1
6	4824.00	47.4 AV	54.0	-6.6	1.04 H	223	45.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	2.80 V	123	59.3	-2.0
2	2390.00	48.1 AV	54.0	-5.9	2.80 V	123	50.1	-2.0
3	*2412.00	107.5 PK			2.80 V	123	109.6	-2.1
4	*2412.00	105.7 AV			2.80 V	123	107.8	-2.1
5	4824.00	45.9 PK	74.0	-28.1	1.55 V	131	43.8	2.1
6	4824.00	44.3 AV	54.0	-9.7	1.55 V	131	42.2	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.28 H	165	62.1	-2.0
2	2390.00	51.4 AV	54.0	-2.6	1.28 H	165	53.4	-2.0
3	*2417.00	109.6 PK			1.28 H	165	111.7	-2.1
4	*2417.00	107.4 AV			1.28 H	165	109.5	-2.1
5	4834.00	48.3 PK	74.0	-25.7	1.04 H	227	46.2	2.1
6	4834.00	47.7 AV	54.0	-6.3	1.04 H	227	45.6	2.1
7	7251.00	47.1 PK	74.0	-26.9	1.73 H	219	39.5	7.6
8	7251.00	41.4 AV	54.0	-12.6	1.73 H	219	33.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.8 PK	74.0	-16.2	1.01 V	85	59.8	-2.0
2	2390.00	48.6 AV	54.0	-5.4	1.01 V	85	50.6	-2.0
3	*2417.00	108.4 PK			1.01 V	85	110.5	-2.1
4	*2417.00	106.3 AV			1.01 V	85	108.4	-2.1
5	4834.00	46.2 PK	74.0	-27.8	1.55 V	146	44.1	2.1
6	4834.00	44.3 AV	54.0	-9.7	1.55 V	146	42.2	2.1
7	7251.00	46.1 PK	74.0	-27.9	1.67 V	112	38.5	7.6
8	7251.00	40.0 AV	54.0	-14.0	1.67 V	112	32.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	1.19 H	166	58.5	-2.0
2	2390.00	45.1 AV	54.0	-8.9	1.19 H	166	47.1	-2.0
3	*2437.00	110.5 PK			1.19 H	166	112.6	-2.1
4	*2437.00	108.0 AV			1.19 H	166	110.1	-2.1
5	2483.50	56.3 PK	74.0	-17.7	1.19 H	166	58.7	-2.4
6	2483.50	44.1 AV	54.0	-9.9	1.19 H	166	46.5	-2.4
7	4874.00	48.6 PK	74.0	-25.4	1.02 H	216	46.2	2.4
8	4874.00	47.5 AV	54.0	-6.5	1.02 H	216	45.1	2.4
9	7311.00	47.6 PK	74.0	-26.4	1.69 H	210	40.2	7.4
10	7311.00	41.6 AV	54.0	-12.4	1.69 H	210	34.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.3 PK	74.0	-17.7	2.64 V	266	58.3	-2.0
2	2390.00	44.1 AV	54.0	-9.9	2.64 V	266	46.1	-2.0
3	*2437.00	109.6 PK			2.64 V	266	111.7	-2.1
4	*2437.00	106.9 AV			2.64 V	266	109.0	-2.1
5	2483.50	55.7 PK	74.0	-18.3	2.64 V	266	58.1	-2.4
6	2483.50	43.7 AV	54.0	-10.3	2.64 V	266	46.1	-2.4
7	4874.00	46.2 PK	74.0	-27.8	1.51 V	145	43.8	2.4
8	4874.00	44.1 AV	54.0	-9.9	1.51 V	145	41.7	2.4
9	7311.00	45.9 PK	74.0	-28.1	1.69 V	99	38.5	7.4
10	7311.00	39.8 AV	54.0	-14.2	1.69 V	99	32.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.5 PK			1.22 H	164	109.9	-2.4
2	*2457.00	105.6 AV			1.22 H	164	108.0	-2.4
3	2483.50	60.3 PK	74.0	-13.7	1.22 H	164	62.7	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.22 H	164	54.7	-2.4
5	4914.00	48.7 PK	74.0	-25.3	1.01 H	217	46.2	2.5
6	4914.00	47.8 AV	54.0	-6.2	1.01 H	217	45.3	2.5
7	7371.00	47.7 PK	74.0	-26.3	1.70 H	204	40.1	7.6
8	7371.00	41.5 AV	54.0	-12.5	1.70 H	204	33.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.9 PK			1.04 V	93	109.3	-2.4
2	*2457.00	104.8 AV			1.04 V	93	107.2	-2.4
3	2483.50	58.1 PK	74.0	-15.9	1.04 V	93	60.5	-2.4
4	2483.50	50.1 AV	54.0	-3.9	1.04 V	93	52.5	-2.4
5	4914.00	45.8 PK	74.0	-28.2	1.55 V	155	43.3	2.5
6	4914.00	44.0 AV	54.0	-10.0	1.55 V	155	41.5	2.5
7	7371.00	45.7 PK	74.0	-28.3	1.66 V	83	38.1	7.6
8	7371.00	39.9 AV	54.0	-14.1	1.66 V	83	32.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.0 PK			1.26 H	162	109.4	-2.4
2	*2462.00	105.1 AV			1.26 H	162	107.5	-2.4
3	2483.50	58.7 PK	74.0	-15.3	1.26 H	162	61.1	-2.4
4	2483.50	49.6 AV	54.0	-4.4	1.26 H	162	52.0	-2.4
5	4924.00	48.4 PK	74.0	-25.6	1.00 H	228	45.9	2.5
6	4924.00	47.5 AV	54.0	-6.5	1.00 H	228	45.0	2.5
7	7386.00	48.1 PK	74.0	-25.9	1.65 H	208	40.4	7.7
8	7386.00	41.8 AV	54.0	-12.2	1.65 H	208	34.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.6 PK			2.54 V	257	109.0	-2.4
2	*2462.00	104.4 AV			2.54 V	257	106.8	-2.4
3	2483.50	58.2 PK	74.0	-15.8	2.54 V	257	60.6	-2.4
4	2483.50	49.6 AV	54.0	-4.4	2.54 V	257	52.0	-2.4
5	4924.00	46.3 PK	74.0	-27.7	1.51 V	152	43.8	2.5
6	4924.00	44.3 AV	54.0	-9.7	1.51 V	152	41.8	2.5
7	7386.00	46.1 PK	74.0	-27.9	1.71 V	95	38.4	7.7
8	7386.00	40.0 AV	54.0	-14.0	1.71 V	95	32.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.8 PK			1.20 H	164	107.2	-2.4
2	*2467.00	102.9 AV			1.20 H	164	105.3	-2.4
3	2483.50	60.9 PK	74.0	-13.1	1.20 H	164	63.3	-2.4
4	2483.50	50.7 AV	54.0	-3.3	1.20 H	164	53.1	-2.4
5	4934.00	48.7 PK	74.0	-25.3	1.00 H	234	46.3	2.4
6	4934.00	48.0 AV	54.0	-6.0	1.00 H	234	45.6	2.4
7	7401.00	48.2 PK	74.0	-25.8	1.70 H	224	40.3	7.9
8	7401.00	42.2 AV	54.0	-11.8	1.70 H	224	34.3	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.3 PK			1.07 V	75	106.7	-2.4
2	*2467.00	102.1 AV			1.07 V	75	104.5	-2.4
3	2483.50	59.7 PK	74.0	-14.3	1.07 V	75	62.1	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.07 V	75	52.7	-2.4
5	4934.00	46.5 PK	74.0	-27.5	1.50 V	150	44.1	2.4
6	4934.00	44.3 AV	54.0	-9.7	1.50 V	150	41.9	2.4
7	7401.00	45.8 PK	74.0	-28.2	1.67 V	94	37.9	7.9
8	7401.00	39.7 AV	54.0	-14.3	1.67 V	94	31.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.5 PK			1.45 H	166	104.9	-2.4
2	*2472.00	100.4 AV			1.45 H	166	102.8	-2.4
3	2483.50	60.3 PK	74.0	-13.7	1.45 H	166	62.7	-2.4
4	2483.50	51.7 AV	54.0	-2.3	1.45 H	166	54.1	-2.4
5	4944.00	48.7 PK	74.0	-25.3	1.00 H	231	46.3	2.4
6	4944.00	47.8 AV	54.0	-6.2	1.00 H	231	45.4	2.4
7	7416.00	48.0 PK	74.0	-26.0	1.71 H	237	40.0	8.0
8	7416.00	41.7 AV	54.0	-12.3	1.71 H	237	33.7	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.8 PK			1.01 V	76	104.2	-2.4
2	*2472.00	99.6 AV			1.01 V	76	102.0	-2.4
3	2483.50	59.4 PK	74.0	-14.6	1.01 V	76	61.8	-2.4
4	2483.50	51.5 AV	54.0	-2.5	1.01 V	76	53.9	-2.4
5	4944.00	46.9 PK	74.0	-27.1	1.48 V	134	44.5	2.4
6	4944.00	44.4 AV	54.0	-9.6	1.48 V	134	42.0	2.4
7	7416.00	46.2 PK	74.0	-27.8	1.71 V	80	38.2	8.0
8	7416.00	39.8 AV	54.0	-14.2	1.71 V	80	31.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	1.25 H	164	69.3	-2.0
2	2390.00	51.5 AV	54.0	-2.5	1.25 H	164	53.5	-2.0
3	*2412.00	108.3 PK			1.25 H	164	110.4	-2.1
4	*2412.00	100.0 AV			1.25 H	164	102.1	-2.1
5	4824.00	48.4 PK	74.0	-25.6	1.02 H	218	46.3	2.1
6	4824.00	47.4 AV	54.0	-6.6	1.02 H	218	45.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.01 V	94	62.3	-2.0
2	2390.00	47.2 AV	54.0	-6.8	1.01 V	94	49.2	-2.0
3	*2412.00	107.5 PK			1.01 V	94	109.6	-2.1
4	*2412.00	98.1 AV			1.01 V	94	100.2	-2.1
5	4824.00	46.4 PK	74.0	-27.6	1.52 V	132	44.3	2.1
6	4824.00	44.1 AV	54.0	-9.9	1.52 V	132	42.0	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.50 H	165	72.6	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.50 H	165	54.4	-2.0
3	*2417.00	109.3 PK			1.50 H	165	111.4	-2.1
4	*2417.00	100.7 AV			1.50 H	165	102.8	-2.1
5	4834.00	44.6 PK	74.0	-29.4	3.79 H	282	42.5	2.1
6	4834.00	31.7 AV	54.0	-22.3	3.79 H	282	29.6	2.1
7	7251.00	48.4 PK	74.0	-25.6	3.59 H	124	40.8	7.6
8	7251.00	35.6 AV	54.0	-18.4	3.59 H	124	28.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.01 V	88	62.5	-2.0
2	2390.00	48.7 AV	54.0	-5.3	1.01 V	88	50.7	-2.0
3	*2417.00	104.8 PK			1.01 V	88	106.9	-2.1
4	*2417.00	98.8 AV			1.01 V	88	100.9	-2.1
5	4834.00	41.9 PK	74.0	-32.1	2.62 V	10	39.8	2.1
6	4834.00	29.7 AV	54.0	-24.3	2.62 V	10	27.6	2.1
7	7251.00	47.7 PK	74.0	-26.3	1.03 V	218	40.1	7.6
8	7251.00	35.1 AV	54.0	-18.9	1.03 V	218	27.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	1.22 H	163	66.9	-2.0
2	2390.00	47.9 AV	54.0	-6.1	1.22 H	163	49.9	-2.0
3	*2437.00	112.2 PK			1.22 H	163	114.3	-2.1
4	*2437.00	104.3 AV			1.22 H	163	106.4	-2.1
5	2483.50	62.5 PK	74.0	-11.5	1.22 H	163	64.9	-2.4
6	2483.50	45.2 AV	54.0	-8.8	1.22 H	163	47.6	-2.4
7	4874.00	44.2 PK	74.0	-29.8	3.81 H	278	41.8	2.4
8	4874.00	31.5 AV	54.0	-22.5	3.81 H	278	29.1	2.4
9	7311.00	48.6 PK	74.0	-25.4	3.62 H	121	41.2	7.4
10	7311.00	35.6 AV	54.0	-18.4	3.62 H	121	28.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	2.66 V	273	59.7	-2.0
2	2390.00	44.3 AV	54.0	-9.7	2.66 V	273	46.3	-2.0
3	*2437.00	107.8 PK			2.66 V	273	109.9	-2.1
4	*2437.00	102.5 AV			2.66 V	273	104.6	-2.1
5	2483.50	56.3 PK	74.0	-17.7	2.66 V	273	58.7	-2.4
6	2483.50	43.6 AV	54.0	-10.4	2.66 V	273	46.0	-2.4
7	4874.00	41.9 PK	74.0	-32.1	2.60 V	360	39.5	2.4
8	4874.00	29.9 AV	54.0	-24.1	2.60 V	360	27.5	2.4
9	7311.00	47.3 PK	74.0	-26.7	1.05 V	209	39.9	7.4
10	7311.00	34.6 AV	54.0	-19.4	1.05 V	209	27.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.8 PK			1.24 H	165	110.2	-2.4
2	*2457.00	99.1 AV			1.24 H	165	101.5	-2.4
3	2483.50	66.4 PK	74.0	-7.6	1.24 H	165	68.8	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.24 H	165	53.6	-2.4
5	4914.00	44.7 PK	74.0	-29.3	3.84 H	291	42.2	2.5
6	4914.00	31.9 AV	54.0	-22.1	3.84 H	291	29.4	2.5
7	7371.00	48.3 PK	74.0	-25.7	3.62 H	128	40.7	7.6
8	7371.00	35.4 AV	54.0	-18.6	3.62 H	128	27.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.3 PK			2.58 V	262	108.7	-2.4
2	*2457.00	97.6 AV			2.58 V	262	100.0	-2.4
3	2483.50	65.6 PK	74.0	-8.4	2.58 V	262	68.0	-2.4
4	2483.50	50.2 AV	54.0	-3.8	2.58 V	262	52.6	-2.4
5	4914.00	42.5 PK	74.0	-31.5	2.61 V	352	40.0	2.5
6	4914.00	30.3 AV	54.0	-23.7	2.61 V	352	27.8	2.5
7	7371.00	47.7 PK	74.0	-26.3	1.00 V	199	40.1	7.6
8	7371.00	35.0 AV	54.0	-19.0	1.00 V	199	27.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.5 PK			1.22 H	163	108.9	-2.4
2	*2462.00	97.4 AV			1.22 H	163	99.8	-2.4
3	2483.50	67.4 PK	74.0	-6.6	1.22 H	163	69.8	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.22 H	163	54.4	-2.4
5	4924.00	44.4 PK	74.0	-29.6	3.82 H	295	41.9	2.5
6	4924.00	31.6 AV	54.0	-22.4	3.82 H	295	29.1	2.5
7	7386.00	48.1 PK	74.0	-25.9	3.57 H	143	40.4	7.7
8	7386.00	35.2 AV	54.0	-18.8	3.57 H	143	27.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.4 PK			3.03 V	243	107.8	-2.4
2	*2462.00	96.4 AV			3.03 V	243	98.8	-2.4
3	2483.50	63.8 PK	74.0	-10.2	3.03 V	243	66.2	-2.4
4	2483.50	49.6 AV	54.0	-4.4	3.03 V	243	52.0	-2.4
5	4924.00	42.2 PK	74.0	-31.8	2.66 V	2	39.7	2.5
6	4924.00	29.9 AV	54.0	-24.1	2.66 V	2	27.4	2.5
7	7386.00	47.1 PK	74.0	-26.9	1.02 V	188	39.4	7.7
8	7386.00	34.5 AV	54.0	-19.5	1.02 V	188	26.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.6 PK			1.26 H	162	108.0	-2.4
2	*2467.00	96.8 AV			1.26 H	162	99.2	-2.4
3	2483.50	67.8 PK	74.0	-6.2	1.26 H	162	70.2	-2.4
4	2483.50	51.5 AV	54.0	-2.5	1.26 H	162	53.9	-2.4
5	4934.00	44.5 PK	74.0	-29.5	3.77 H	283	42.1	2.4
6	4934.00	31.4 AV	54.0	-22.6	3.77 H	283	29.0	2.4
7	7401.00	47.8 PK	74.0	-26.2	3.59 H	147	39.9	7.9
8	7401.00	35.1 AV	54.0	-18.9	3.59 H	147	27.2	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.7 PK			1.02 V	94	107.1	-2.4
2	*2467.00	96.0 AV			1.02 V	94	98.4	-2.4
3	2483.50	67.1 PK	74.0	-6.9	1.02 V	94	69.5	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.02 V	94	53.6	-2.4
5	4934.00	42.3 PK	74.0	-31.7	2.66 V	18	39.9	2.4
6	4934.00	29.7 AV	54.0	-24.3	2.66 V	18	27.3	2.4
7	7401.00	47.0 PK	74.0	-27.0	1.00 V	189	39.1	7.9
8	7401.00	34.1 AV	54.0	-19.9	1.00 V	189	26.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.1 PK			1.14 H	172	105.5	-2.4
2	*2472.00	94.3 AV			1.14 H	172	96.7	-2.4
3	2483.50	69.3 PK	74.0	-4.7	1.14 H	172	71.7	-2.4
4	2483.50	47.9 AV	54.0	-6.1	1.14 H	172	50.3	-2.4
5	4944.00	44.5 PK	74.0	-29.5	3.81 H	298	42.1	2.4
6	4944.00	31.6 AV	54.0	-22.4	3.81 H	298	29.2	2.4
7	7416.00	48.2 PK	74.0	-25.8	3.64 H	153	40.2	8.0
8	7416.00	34.6 AV	54.0	-19.4	3.64 H	153	26.6	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.5 PK			1.01 V	92	103.9	-2.4
2	*2472.00	93.1 AV			1.01 V	92	95.5	-2.4
3	2483.50	70.8 PK	74.0	-3.2	1.01 V	92	73.2	-2.4
4	2483.50	49.0 AV	54.0	-5.0	1.01 V	92	51.4	-2.4
5	4944.00	42.3 PK	74.0	-31.7	2.68 V	360	39.9	2.4
6	4944.00	29.9 AV	54.0	-24.1	2.68 V	360	27.5	2.4
7	7416.00	47.1 PK	74.0	-26.9	1.00 V	178	39.1	8.0
8	7416.00	34.4 AV	54.0	-19.6	1.00 V	178	26.4	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.27 H	164	69.1	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.27 H	164	54.3	-2.0
3	*2412.00	111.2 PK			1.27 H	164	113.3	-2.1
4	*2412.00	99.7 AV			1.27 H	164	101.8	-2.1
5	4824.00	44.6 PK	74.0	-29.4	3.82 H	308	42.5	2.1
6	4824.00	31.5 AV	54.0	-22.5	3.82 H	308	29.4	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.0 PK	74.0	-11.0	1.89 V	85	65.0	-2.0
2	2390.00	49.3 AV	54.0	-4.7	1.89 V	85	51.3	-2.0
3	*2412.00	109.4 PK			1.89 V	85	111.5	-2.1
4	*2412.00	98.2 AV			1.89 V	85	100.3	-2.1
5	4824.00	42.0 PK	74.0	-32.0	2.64 V	22	39.9	2.1
6	4824.00	29.8 AV	54.0	-24.2	2.64 V	22	27.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.9 PK	74.0	-8.1	1.30 H	163	67.9	-2.0
2	2390.00	51.7 AV	54.0	-2.3	1.30 H	163	53.7	-2.0
3	*2417.00	111.4 PK			1.30 H	163	113.5	-2.1
4	*2417.00	99.8 AV			1.30 H	163	101.9	-2.1
5	4834.00	44.6 PK	74.0	-29.4	3.84 H	306	42.5	2.1
6	4834.00	31.6 AV	54.0	-22.4	3.84 H	306	29.5	2.1
7	7251.00	48.4 PK	74.0	-25.6	3.64 H	157	40.8	7.6
8	7251.00	34.7 AV	54.0	-19.3	3.64 H	157	27.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	1.02 V	97	65.2	-2.0
2	2390.00	48.9 AV	54.0	-5.1	1.02 V	97	50.9	-2.0
3	*2417.00	110.5 PK			1.02 V	97	112.6	-2.1
4	*2417.00	98.5 AV			1.02 V	97	100.6	-2.1
5	4834.00	41.7 PK	74.0	-32.3	2.71 V	15	39.6	2.1
6	4834.00	29.5 AV	54.0	-24.5	2.71 V	15	27.4	2.1
7	7251.00	46.9 PK	74.0	-27.1	1.00 V	190	39.3	7.6
8	7251.00	34.4 AV	54.0	-19.6	1.00 V	190	26.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.7 PK	74.0	-7.3	1.24 H	163	68.7	-2.0
2	2390.00	49.1 AV	54.0	-4.9	1.24 H	163	51.1	-2.0
3	*2437.00	115.2 PK			1.24 H	163	117.3	-2.1
4	*2437.00	103.4 AV			1.24 H	163	105.5	-2.1
5	2483.50	61.4 PK	74.0	-12.6	1.24 H	163	63.8	-2.4
6	2483.50	45.7 AV	54.0	-8.3	1.24 H	163	48.1	-2.4
7	4874.00	45.2 PK	74.0	-28.8	3.87 H	304	42.8	2.4
8	4874.00	32.1 AV	54.0	-21.9	3.87 H	304	29.7	2.4
9	7311.00	48.1 PK	74.0	-25.9	3.62 H	142	40.7	7.4
10	7311.00	34.8 AV	54.0	-19.2	3.62 H	142	27.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.01 V	98	62.1	-2.0
2	2390.00	45.1 AV	54.0	-8.9	1.01 V	98	47.1	-2.0
3	*2437.00	113.8 PK			1.01 V	98	115.9	-2.1
4	*2437.00	101.9 AV			1.01 V	98	104.0	-2.1
5	2483.50	59.1 PK	74.0	-14.9	1.01 V	98	61.5	-2.4
6	2483.50	43.8 AV	54.0	-10.2	1.01 V	98	46.2	-2.4
7	4874.00	41.7 PK	74.0	-32.3	2.74 V	7	39.3	2.4
8	4874.00	29.8 AV	54.0	-24.2	2.74 V	7	27.4	2.4
9	7311.00	46.6 PK	74.0	-27.4	1.00 V	191	39.2	7.4
10	7311.00	33.8 AV	54.0	-20.2	1.00 V	191	26.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	109.8 PK			1.25 H	162	112.2	-2.4
2	*2457.00	98.2 AV			1.25 H	162	100.6	-2.4
3	2483.50	67.7 PK	74.0	-6.3	1.25 H	162	70.1	-2.4
4	2483.50	50.9 AV	54.0	-3.1	1.25 H	162	53.3	-2.4
5	4914.00	45.2 PK	74.0	-28.8	3.91 H	303	42.7	2.5
6	4914.00	32.4 AV	54.0	-21.6	3.91 H	303	29.9	2.5
7	7371.00	48.3 PK	74.0	-25.7	3.59 H	129	40.7	7.6
8	7371.00	34.4 AV	54.0	-19.6	3.59 H	129	26.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.0 PK			2.06 V	82	110.4	-2.4
2	*2457.00	97.0 AV			2.06 V	82	99.4	-2.4
3	2483.50	68.1 PK	74.0	-5.9	2.06 V	82	70.5	-2.4
4	2483.50	52.0 AV	54.0	-2.0	2.06 V	82	54.4	-2.4
5	4914.00	41.7 PK	74.0	-32.3	2.71 V	18	39.2	2.5
6	4914.00	30.1 AV	54.0	-23.9	2.71 V	18	27.6	2.5
7	7371.00	46.8 PK	74.0	-27.2	1.00 V	179	39.2	7.6
8	7371.00	33.7 AV	54.0	-20.3	1.00 V	179	26.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.7 PK			1.23 H	162	111.1	-2.4
2	*2462.00	97.2 AV			1.23 H	162	99.6	-2.4
3	2483.50	66.3 PK	74.0	-7.7	1.23 H	162	68.7	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.23 H	162	54.8	-2.4
5	4924.00	45.3 PK	74.0	-28.7	3.85 H	314	42.8	2.5
6	4924.00	32.5 AV	54.0	-21.5	3.85 H	314	30.0	2.5
7	7386.00	48.2 PK	74.0	-25.8	3.58 H	114	40.5	7.7
8	7386.00	34.2 AV	54.0	-19.8	3.58 H	114	26.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.2 PK			1.12 V	97	109.6	-2.4
2	*2462.00	96.1 AV			1.12 V	97	98.5	-2.4
3	2483.50	65.5 PK	74.0	-8.5	1.12 V	97	67.9	-2.4
4	2483.50	49.9 AV	54.0	-4.1	1.12 V	97	52.3	-2.4
5	4924.00	41.7 PK	74.0	-32.3	2.66 V	28	39.2	2.5
6	4924.00	30.1 AV	54.0	-23.9	2.66 V	28	27.6	2.5
7	7386.00	46.8 PK	74.0	-27.2	1.00 V	183	39.1	7.7
8	7386.00	33.4 AV	54.0	-20.6	1.00 V	183	25.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			1.22 H	163	110.2	-2.4
2	*2467.00	96.7 AV			1.22 H	163	99.1	-2.4
3	2483.50	63.2 PK	74.0	-10.8	1.22 H	163	65.6	-2.4
4	2483.50	51.5 AV	54.0	-2.5	1.22 H	163	53.9	-2.4
5	4934.00	44.8 PK	74.0	-29.2	3.84 H	299	42.4	2.4
6	4934.00	32.3 AV	54.0	-21.7	3.84 H	299	29.9	2.4
7	7401.00	48.7 PK	74.0	-25.3	3.63 H	100	40.8	7.9
8	7401.00	34.7 AV	54.0	-19.3	3.63 H	100	26.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.8 PK			1.01 V	93	109.2	-2.4
2	*2467.00	95.5 AV			1.01 V	93	97.9	-2.4
3	2483.50	63.7 PK	74.0	-10.3	1.01 V	93	66.1	-2.4
4	2483.50	50.5 AV	54.0	-3.5	1.01 V	93	52.9	-2.4
5	4934.00	42.3 PK	74.0	-31.7	2.67 V	41	39.9	2.4
6	4934.00	30.5 AV	54.0	-23.5	2.67 V	41	28.1	2.4
7	7401.00	47.0 PK	74.0	-27.0	1.00 V	180	39.1	7.9
8	7401.00	33.9 AV	54.0	-20.1	1.00 V	180	26.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.8 PK			1.43 H	166	109.2	-2.4
2	*2472.00	94.9 AV			1.43 H	166	97.3	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.43 H	166	74.0	-2.4
4	2483.50	49.3 AV	54.0	-4.7	1.43 H	166	51.7	-2.4
5	4944.00	44.8 PK	74.0	-29.2	3.81 H	297	42.4	2.4
6	4944.00	32.6 AV	54.0	-21.4	3.81 H	297	30.2	2.4
7	7416.00	48.6 PK	74.0	-25.4	3.60 H	101	40.6	8.0
8	7416.00	34.7 AV	54.0	-19.3	3.60 H	101	26.7	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.2 PK			1.03 V	94	106.6	-2.4
2	*2472.00	93.2 AV			1.03 V	94	95.6	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.03 V	94	73.9	-2.4
4	2483.50	49.8 AV	54.0	-4.2	1.03 V	94	52.2	-2.4
5	4944.00	42.4 PK	74.0	-31.6	2.63 V	56	40.0	2.4
6	4944.00	30.5 AV	54.0	-23.5	2.63 V	56	28.1	2.4
7	7416.00	47.3 PK	74.0	-26.7	1.00 V	181	39.3	8.0
8	7416.00	34.3 AV	54.0	-19.7	1.00 V	181	26.3	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.27 H	166	68.5	-2.0
2	2390.00	51.7 AV	54.0	-2.3	1.27 H	166	53.7	-2.0
3	*2422.00	106.0 PK			1.27 H	166	108.1	-2.1
4	*2422.00	94.8 AV			1.27 H	166	96.9	-2.1
5	4844.00	44.2 PK	74.0	-29.8	3.82 H	289	42.0	2.2
6	4844.00	32.1 AV	54.0	-21.9	3.82 H	289	29.9	2.2
7	7266.00	48.8 PK	74.0	-25.2	3.55 H	87	41.2	7.6
8	7266.00	35.6 AV	54.0	-18.4	3.55 H	87	28.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.02 V	97	61.1	-2.0
2	2390.00	46.1 AV	54.0	-7.9	1.02 V	97	48.1	-2.0
3	*2422.00	101.3 PK			1.02 V	97	103.4	-2.1
4	*2422.00	89.8 AV			1.02 V	97	91.9	-2.1
5	4844.00	42.6 PK	74.0	-31.4	2.61 V	65	40.4	2.2
6	4844.00	31.0 AV	54.0	-23.0	2.61 V	65	28.8	2.2
7	7266.00	47.1 PK	74.0	-26.9	1.00 V	169	39.5	7.6
8	7266.00	34.1 AV	54.0	-19.9	1.00 V	169	26.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.18 H	167	70.3	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.18 H	167	54.3	-2.0
3	*2437.00	107.2 PK			1.18 H	167	109.3	-2.1
4	*2437.00	95.3 AV			1.18 H	167	97.4	-2.1
5	2483.50	66.5 PK	74.0	-7.5	1.18 H	167	68.9	-2.4
6	2483.50	51.2 AV	54.0	-2.8	1.18 H	167	53.6	-2.4
7	4874.00	43.9 PK	74.0	-30.1	3.81 H	291	41.5	2.4
8	4874.00	31.9 AV	54.0	-22.1	3.81 H	291	29.5	2.4
9	7311.00	48.7 PK	74.0	-25.3	3.60 H	77	41.3	7.4
10	7311.00	35.8 AV	54.0	-18.2	3.60 H	77	28.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.1 PK	74.0	-10.9	1.02 V	98	65.1	-2.0
2	2390.00	48.1 AV	54.0	-5.9	1.02 V	98	50.1	-2.0
3	*2437.00	101.6 PK			1.02 V	98	103.7	-2.1
4	*2437.00	89.5 AV			1.02 V	98	91.6	-2.1
5	2483.50	61.5 PK	74.0	-12.5	1.02 V	98	63.9	-2.4
6	2483.50	47.4 AV	54.0	-6.6	1.02 V	98	49.8	-2.4
7	4874.00	42.6 PK	74.0	-31.4	2.56 V	58	40.2	2.4
8	4874.00	31.1 AV	54.0	-22.9	2.56 V	58	28.7	2.4
9	7311.00	47.1 PK	74.0	-26.9	1.00 V	155	39.7	7.4
10	7311.00	34.3 AV	54.0	-19.7	1.00 V	155	26.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.5 PK			1.26 H	167	107.7	-2.2
2	*2452.00	94.3 AV			1.26 H	167	96.5	-2.2
3	2483.50	68.3 PK	74.0	-5.7	1.26 H	167	70.7	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.26 H	167	54.4	-2.4
5	4904.00	43.4 PK	74.0	-30.6	3.84 H	282	40.9	2.5
6	4904.00	31.8 AV	54.0	-22.2	3.84 H	282	29.3	2.5
7	7356.00	48.3 PK	74.0	-25.7	3.61 H	74	40.8	7.5
8	7356.00	35.6 AV	54.0	-18.4	3.61 H	74	28.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	100.4 PK			2.96 V	137	102.6	-2.2
2	*2452.00	88.7 AV			2.96 V	137	90.9	-2.2
3	2483.50	56.9 PK	74.0	-17.1	2.96 V	137	59.3	-2.4
4	2483.50	44.5 AV	54.0	-9.5	2.96 V	137	46.9	-2.4
5	4904.00	42.7 PK	74.0	-31.3	2.55 V	360	40.2	2.5
6	4904.00	30.2 AV	54.0	-23.8	2.55 V	360	27.7	2.5
7	7356.00	46.9 PK	74.0	-27.1	1.00 V	146	39.4	7.5
8	7356.00	34.1 AV	54.0	-19.9	1.00 V	146	26.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	105.2 PK			1.24 H	168	107.6	-2.4
2	*2457.00	93.7 AV			1.24 H	168	96.1	-2.4
3	2483.50	65.5 PK	74.0	-8.5	1.24 H	168	67.9	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.24 H	168	54.4	-2.4
5	4914.00	43.2 PK	74.0	-30.8	3.80 H	268	40.7	2.5
6	4914.00	31.4 AV	54.0	-22.6	3.80 H	268	28.9	2.5
7	7371.00	48.3 PK	74.0	-25.7	3.58 H	64	40.7	7.6
8	7371.00	35.6 AV	54.0	-18.4	3.58 H	64	28.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	99.8 PK			3.01 V	260	102.2	-2.4
2	*2457.00	87.7 AV			3.01 V	260	90.1	-2.4
3	2483.50	60.8 PK	74.0	-13.2	3.01 V	260	63.2	-2.4
4	2483.50	45.9 AV	54.0	-8.1	3.01 V	260	48.3	-2.4
5	4914.00	42.0 PK	74.0	-32.0	2.51 V	360	39.5	2.5
6	4914.00	29.7 AV	54.0	-24.3	2.51 V	360	27.2	2.5
7	7371.00	47.1 PK	74.0	-26.9	1.00 V	136	39.5	7.6
8	7371.00	34.0 AV	54.0	-20.0	1.00 V	136	26.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.3 PK			1.18 H	166	105.7	-2.4
2	*2462.00	91.6 AV			1.18 H	166	94.0	-2.4
3	2483.50	71.9 PK	74.0	-2.1	1.18 H	166	74.3	-2.4
4	2483.50	48.6 AV	54.0	-5.4	1.18 H	166	51.0	-2.4
5	4924.00	43.5 PK	74.0	-30.5	3.78 H	278	41.0	2.5
6	4924.00	31.4 AV	54.0	-22.6	3.78 H	278	28.9	2.5
7	7386.00	47.9 PK	74.0	-26.1	3.55 H	70	40.2	7.7
8	7386.00	35.4 AV	54.0	-18.6	3.55 H	70	27.7	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	96.7 PK			3.47 V	263	99.1	-2.4
2	*2462.00	84.7 AV			3.47 V	263	87.1	-2.4
3	2483.50	57.2 PK	74.0	-16.8	3.47 V	263	59.6	-2.4
4	2483.50	44.6 AV	54.0	-9.4	3.47 V	263	47.0	-2.4
5	4924.00	42.4 PK	74.0	-31.6	2.51 V	360	39.9	2.5
6	4924.00	30.2 AV	54.0	-23.8	2.51 V	360	27.7	2.5
7	7386.00	47.2 PK	74.0	-26.8	1.00 V	125	39.5	7.7
8	7386.00	34.3 AV	54.0	-19.7	1.00 V	125	26.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	2.51 H	273	74.1	-2.0
2	2390.00	46.1 AV	54.0	-7.9	2.51 H	273	48.1	-2.0
3	*2412.00	120.4 PK			2.51 H	273	122.5	-2.1
4	*2412.00	107.1 AV			2.51 H	273	109.2	-2.1
5	4824.00	43.6 PK	74.0	-30.4	3.80 H	293	41.5	2.1
6	4824.00	31.6 AV	54.0	-22.4	3.80 H	293	29.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.20 V	341	71.9	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.20 V	341	47.6	-2.0
3	*2412.00	113.8 PK			1.20 V	341	115.9	-2.1
4	*2412.00	103.5 AV			1.20 V	341	105.6	-2.1
5	4824.00	43.5 PK	74.0	-30.5	2.50 V	360	41.4	2.1
6	4824.00	31.8 AV	54.0	-22.2	2.50 V	360	29.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.34	69.0 PK	74.0	-5.0	2.80 H	268	71.0	-2.0
2	2374.34	45.9 AV	54.0	-8.1	2.80 H	268	47.9	-2.0
3	2390.00	65.1 PK	74.0	-8.9	2.80 H	268	67.1	-2.0
4	2390.00	44.3 AV	54.0	-9.7	2.80 H	268	46.3	-2.0
5	*2417.00	119.1 PK			2.80 H	268	121.2	-2.1
6	*2417.00	107.6 AV			2.80 H	268	109.7	-2.1
7	4834.00	43.1 PK	74.0	-30.9	3.85 H	281	41.0	2.1
8	4834.00	31.4 AV	54.0	-22.6	3.85 H	281	29.3	2.1
9	7251.00	48.6 PK	74.0	-25.4	3.58 H	92	41.0	7.6
10	7251.00	35.9 AV	54.0	-18.1	3.58 H	92	28.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.34	69.9 PK	74.0	-4.1	1.06 V	340	71.9	-2.0
2	2374.34	44.6 AV	54.0	-9.4	1.06 V	340	46.6	-2.0
3	2390.00	65.3 PK	74.0	-8.7	1.06 V	340	67.3	-2.0
4	2390.00	44.3 AV	54.0	-9.7	1.06 V	340	46.3	-2.0
5	*2417.00	113.4 PK			1.06 V	340	115.5	-2.1
6	*2417.00	102.4 AV			1.06 V	340	104.5	-2.1
7	4834.00	43.2 PK	74.0	-30.8	2.50 V	360	41.1	2.1
8	4834.00	31.6 AV	54.0	-22.4	2.50 V	360	29.5	2.1
9	7251.00	46.6 PK	74.0	-27.4	1.00 V	163	39.0	7.6
10	7251.00	33.8 AV	54.0	-20.2	1.00 V	163	26.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	2.75 H	266	72.2	-2.0
2	2390.00	46.7 AV	54.0	-7.3	2.75 H	266	48.7	-2.0
3	*2437.00	119.4 PK			2.75 H	266	121.5	-2.1
4	*2437.00	109.8 AV			2.75 H	266	111.9	-2.1
5	2483.50	63.6 PK	74.0	-10.4	2.75 H	266	66.0	-2.4
6	2483.50	44.8 AV	54.0	-9.2	2.75 H	266	47.2	-2.4
7	4874.00	43.6 PK	74.0	-30.4	3.80 H	281	41.2	2.4
8	4874.00	31.7 AV	54.0	-22.3	3.80 H	281	29.3	2.4
9	7311.00	48.1 PK	74.0	-25.9	3.52 H	102	40.7	7.4
10	7311.00	35.6 AV	54.0	-18.4	3.52 H	102	28.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.00 V	323	74.4	-2.0
2	2390.00	46.7 AV	54.0	-7.3	1.00 V	323	48.7	-2.0
3	*2437.00	115.8 PK			1.00 V	323	117.9	-2.1
4	*2437.00	105.6 AV			1.00 V	323	107.7	-2.1
5	2483.50	70.2 PK	74.0	-3.8	1.00 V	323	72.6	-2.4
6	2483.50	45.2 AV	54.0	-8.8	1.00 V	323	47.6	-2.4
7	4874.00	43.8 PK	74.0	-30.2	2.44 V	360	41.4	2.4
8	4874.00	32.0 AV	54.0	-22.0	2.44 V	360	29.6	2.4
9	7311.00	46.7 PK	74.0	-27.3	1.00 V	159	39.3	7.4
10	7311.00	34.1 AV	54.0	-19.9	1.00 V	159	26.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.8 PK			1.08 H	266	121.2	-2.4
2	*2457.00	107.3 AV			1.08 H	266	109.7	-2.4
3	2483.50	63.9 PK	74.0	-10.1	1.08 H	266	66.3	-2.4
4	2483.50	45.5 AV	54.0	-8.5	1.08 H	266	47.9	-2.4
5	2498.98	72.0 PK	74.0	-2.0	1.08 H	266	74.4	-2.4
6	2498.98	45.9 AV	54.0	-8.1	1.08 H	266	48.3	-2.4
7	4914.00	43.3 PK	74.0	-30.7	3.74 H	287	40.8	2.5
8	4914.00	31.3 AV	54.0	-22.7	3.74 H	287	28.8	2.5
9	7371.00	48.3 PK	74.0	-25.7	3.49 H	109	40.7	7.6
10	7371.00	35.5 AV	54.0	-18.5	3.49 H	109	27.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.5 PK			1.30 V	320	114.9	-2.4
2	*2457.00	102.4 AV			1.30 V	320	104.8	-2.4
3	2483.50	56.5 PK	74.0	-17.5	1.30 V	320	58.9	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.30 V	320	46.9	-2.4
5	2498.88	71.4 PK	74.0	-2.6	1.30 V	320	73.8	-2.4
6	2498.88	47.3 AV	54.0	-6.7	1.30 V	320	49.7	-2.4
7	4914.00	44.0 PK	74.0	-30.0	2.43 V	360	41.5	2.5
8	4914.00	32.3 AV	54.0	-21.7	2.43 V	360	29.8	2.5
9	7371.00	46.6 PK	74.0	-27.4	1.00 V	162	39.0	7.6
10	7371.00	34.0 AV	54.0	-20.0	1.00 V	162	26.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.5 PK			1.05 H	267	119.9	-2.4
2	*2462.00	107.0 AV			1.05 H	267	109.4	-2.4
3	2483.50	68.3 PK	74.0	-5.7	1.05 H	267	70.7	-2.4
4	2483.50	46.1 AV	54.0	-7.9	1.05 H	267	48.5	-2.4
5	2499.14	69.1 PK	74.0	-4.9	1.05 H	267	71.5	-2.4
6	2499.14	43.9 AV	54.0	-10.1	1.05 H	267	46.3	-2.4
7	4924.00	45.8 PK	74.0	-28.2	3.91 H	317	43.3	2.5
8	4924.00	32.8 AV	54.0	-21.2	3.91 H	317	30.3	2.5
9	7386.00	47.6 PK	74.0	-26.4	3.59 H	103	39.9	7.7
10	7386.00	33.8 AV	54.0	-20.2	3.59 H	103	26.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.3 PK			1.29 V	321	114.7	-2.4
2	*2462.00	102.3 AV			1.29 V	321	104.7	-2.4
3	2483.50	63.9 PK	74.0	-10.1	1.29 V	321	66.3	-2.4
4	2483.50	45.2 AV	54.0	-8.8	1.29 V	321	47.6	-2.4
5	2499.14	69.4 PK	74.0	-4.6	1.29 V	321	71.8	-2.4
6	2499.14	44.1 AV	54.0	-9.9	1.29 V	321	46.5	-2.4
7	4924.00	43.7 PK	74.0	-30.3	2.48 V	360	41.2	2.5
8	4924.00	32.0 AV	54.0	-22.0	2.48 V	360	29.5	2.5
9	7386.00	46.4 PK	74.0	-27.6	1.00 V	167	38.7	7.7
10	7386.00	33.8 AV	54.0	-20.2	1.00 V	167	26.1	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.2 PK			1.06 H	266	119.6	-2.4
2	*2467.00	105.2 AV			1.06 H	266	107.6	-2.4
3	2483.50	65.7 PK	74.0	-8.3	1.06 H	266	68.1	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.06 H	266	47.8	-2.4
5	2499.92	69.2 PK	74.0	-4.8	1.06 H	266	71.6	-2.4
6	2499.92	44.1 AV	54.0	-9.9	1.06 H	266	46.5	-2.4
7	4934.00	45.3 PK	74.0	-28.7	3.82 H	328	42.9	2.4
8	4934.00	32.4 AV	54.0	-21.6	3.82 H	328	30.0	2.4
9	7401.00	48.1 PK	74.0	-25.9	3.56 H	105	40.2	7.9
10	7401.00	33.9 AV	54.0	-20.1	3.56 H	105	26.0	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.0 PK			1.28 V	323	113.4	-2.4
2	*2467.00	100.8 AV			1.28 V	323	103.2	-2.4
3	2483.50	64.0 PK	74.0	-10.0	1.28 V	323	66.4	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.28 V	323	47.0	-2.4
5	2499.92	57.4 PK	74.0	-16.6	1.28 V	323	59.8	-2.4
6	2499.92	43.9 AV	54.0	-10.1	1.28 V	323	46.3	-2.4
7	4934.00	44.3 PK	74.0	-29.7	2.40 V	360	41.9	2.4
8	4934.00	32.4 AV	54.0	-21.6	2.40 V	360	30.0	2.4
9	7401.00	47.1 PK	74.0	-26.9	1.00 V	161	39.2	7.9
10	7401.00	34.4 AV	54.0	-19.6	1.00 V	161	26.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.1 PK			1.04 H	265	117.5	-2.4
2	*2472.00	104.3 AV			1.04 H	265	106.7	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.04 H	265	74.8	-2.4
4	2483.50	50.7 AV	54.0	-3.3	1.04 H	265	53.1	-2.4
5	4944.00	44.9 PK	74.0	-29.1	3.85 H	310	42.5	2.4
6	4944.00	32.2 AV	54.0	-21.8	3.85 H	310	29.8	2.4
7	7416.00	48.0 PK	74.0	-26.0	3.56 H	130	40.0	8.0
8	7416.00	33.7 AV	54.0	-20.3	3.56 H	130	25.7	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.2 PK			3.20 V	287	112.6	-2.4
2	*2472.00	100.4 AV			3.20 V	287	102.8	-2.4
3	2483.50	70.7 PK	74.0	-3.3	3.20 V	287	73.1	-2.4
4	2483.50	40.1 AV	54.0	-13.9	3.20 V	287	42.5	-2.4
5	4944.00	43.9 PK	74.0	-30.1	2.37 V	360	41.5	2.4
6	4944.00	32.4 AV	54.0	-21.6	2.37 V	360	30.0	2.4
7	7416.00	46.5 PK	74.0	-27.5	1.00 V	164	38.5	8.0
8	7416.00	33.8 AV	54.0	-20.2	1.00 V	164	25.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.82	63.5 PK	74.0	-10.5	1.00 H	0	65.5	-2.0
2	2376.82	45.7 AV	54.0	-8.3	1.00 H	0	47.7	-2.0
3	2390.00	62.3 PK	74.0	-11.7	1.01 H	264	64.3	-2.0
4	2390.00	44.5 AV	54.0	-9.5	1.01 H	264	46.5	-2.0
5	*2412.00	116.5 PK			1.01 H	264	118.6	-2.1
6	*2412.00	103.8 AV			1.01 H	264	105.9	-2.1
7	4824.00	45.0 PK	74.0	-29.0	3.79 H	315	42.9	2.1
8	4824.00	32.4 AV	54.0	-21.6	3.79 H	315	30.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.82	58.8 PK	74.0	-15.2	1.21 V	341	60.8	-2.0
2	2376.82	44.2 AV	54.0	-9.8	1.21 V	341	46.2	-2.0
3	2390.00	61.5 PK	74.0	-12.5	1.21 V	341	63.5	-2.0
4	2390.00	44.7 AV	54.0	-9.3	1.21 V	341	46.7	-2.0
5	*2412.00	110.0 PK			1.21 V	341	112.1	-2.1
6	*2412.00	99.1 AV			1.21 V	341	101.2	-2.1
7	4824.00	44.5 PK	74.0	-29.5	2.47 V	360	42.4	2.1
8	4824.00	32.8 AV	54.0	-21.2	2.47 V	360	30.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2379.14	72.0 PK	74.0	-2.0	1.10 H	263	74.0	-2.0
2	2379.14	44.6 AV	54.0	-9.4	1.10 H	263	46.6	-2.0
3	2390.00	56.3 PK	74.0	-17.7	1.10 H	263	58.3	-2.0
4	2390.00	44.9 AV	54.0	-9.1	1.10 H	263	46.9	-2.0
5	*2417.00	116.7 PK			1.10 H	263	118.8	-2.1
6	*2417.00	103.7 AV			1.10 H	263	105.8	-2.1
7	4834.00	45.3 PK	74.0	-28.7	3.90 H	326	43.2	2.1
8	4834.00	32.3 AV	54.0	-21.7	3.90 H	326	30.2	2.1
9	7251.00	48.2 PK	74.0	-25.8	3.53 H	103	40.6	7.6
10	7251.00	34.0 AV	54.0	-20.0	3.53 H	103	26.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2379.14	56.2 PK	74.0	-17.8	1.06 V	340	58.2	-2.0
2	2379.14	44.2 AV	54.0	-9.8	1.06 V	340	46.2	-2.0
3	2390.00	57.6 PK	74.0	-16.4	1.06 V	340	59.6	-2.0
4	2390.00	44.4 AV	54.0	-9.6	1.06 V	340	46.4	-2.0
5	*2417.00	110.6 PK			1.06 V	340	112.7	-2.1
6	*2417.00	99.0 AV			1.06 V	340	101.1	-2.1
7	4834.00	44.4 PK	74.0	-29.6	2.35 V	360	42.3	2.1
8	4834.00	32.7 AV	54.0	-21.3	2.35 V	360	30.6	2.1
9	7251.00	45.8 PK	74.0	-28.2	1.00 V	152	38.2	7.6
10	7251.00	33.4 AV	54.0	-20.6	1.00 V	152	25.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.09 H	270	73.2	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.09 H	270	47.8	-2.0
3	*2437.00	118.8 PK			1.09 H	270	120.9	-2.1
4	*2437.00	106.8 AV			1.09 H	270	108.9	-2.1
5	2483.50	60.7 PK	74.0	-13.3	1.09 H	270	63.1	-2.4
6	2483.50	44.9 AV	54.0	-9.1	1.09 H	270	47.3	-2.4
7	4874.00	45.2 PK	74.0	-28.8	3.89 H	325	42.8	2.4
8	4874.00	32.4 AV	54.0	-21.6	3.89 H	325	30.0	2.4
9	7311.00	48.0 PK	74.0	-26.0	3.54 H	114	40.6	7.4
10	7311.00	33.9 AV	54.0	-20.1	3.54 H	114	26.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.00 V	324	74.4	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.00 V	324	47.0	-2.0
3	*2437.00	113.2 PK			1.00 V	324	115.3	-2.1
4	*2437.00	102.8 AV			1.00 V	324	104.9	-2.1
5	2483.50	65.6 PK	74.0	-8.4	1.00 V	324	68.0	-2.4
6	2483.50	44.4 AV	54.0	-9.6	1.00 V	324	46.8	-2.4
7	4874.00	44.3 PK	74.0	-29.7	2.35 V	360	41.9	2.4
8	4874.00	32.7 AV	54.0	-21.3	2.35 V	360	30.3	2.4
9	7311.00	46.3 PK	74.0	-27.7	1.00 V	168	38.9	7.4
10	7311.00	33.6 AV	54.0	-20.4	1.00 V	168	26.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	115.9 PK			1.07 H	267	118.3	-2.4
2	*2457.00	104.2 AV			1.07 H	267	106.6	-2.4
3	2483.50	60.1 PK	74.0	-13.9	1.07 H	267	62.5	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.07 H	267	47.2	-2.4
5	2491.53	66.6 PK	74.0	-7.4	1.00 H	0	69.0	-2.4
6	2491.53	44.5 AV	54.0	-9.5	1.00 H	0	46.9	-2.4
7	4914.00	45.3 PK	74.0	-28.7	3.85 H	311	42.8	2.5
8	4914.00	32.3 AV	54.0	-21.7	3.85 H	311	29.8	2.5
9	7371.00	48.7 PK	74.0	-25.3	3.61 H	99	41.1	7.6
10	7371.00	34.5 AV	54.0	-19.5	3.61 H	99	26.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	109.0 PK			1.50 V	317	111.4	-2.4
2	*2457.00	98.2 AV			1.50 V	317	100.6	-2.4
3	2483.50	53.9 PK	74.0	-20.1	1.50 V	317	56.3	-2.4
4	2483.50	43.4 AV	54.0	-10.6	1.50 V	317	45.8	-2.4
5	2491.53	67.2 PK	74.0	-6.8	1.50 V	317	69.6	-2.4
6	2491.53	44.0 AV	54.0	-10.0	1.50 V	317	46.4	-2.4
7	4914.00	44.0 PK	74.0	-30.0	2.39 V	360	41.5	2.5
8	4914.00	32.3 AV	54.0	-21.7	2.39 V	360	29.8	2.5
9	7371.00	46.7 PK	74.0	-27.3	1.00 V	154	39.1	7.6
10	7371.00	34.1 AV	54.0	-19.9	1.00 V	154	26.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.9 PK			1.20 H	267	117.3	-2.4
2	*2462.00	104.1 AV			1.20 H	267	106.5	-2.4
3	2483.50	64.7 PK	74.0	-9.3	1.20 H	267	67.1	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.20 H	267	48.0	-2.4
5	4924.00	45.4 PK	74.0	-28.6	3.87 H	307	42.9	2.5
6	4924.00	32.7 AV	54.0	-21.3	3.87 H	307	30.2	2.5
7	7386.00	47.6 PK	74.0	-26.4	3.59 H	106	39.9	7.7
8	7386.00	33.8 AV	54.0	-20.2	3.59 H	106	26.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.2 PK			3.23 V	286	111.6	-2.4
2	*2462.00	98.5 AV			3.23 V	286	100.9	-2.4
3	2483.50	64.5 PK	74.0	-9.5	3.23 V	286	66.9	-2.4
4	2483.50	44.5 AV	54.0	-9.5	3.23 V	286	46.9	-2.4
5	4924.00	44.2 PK	74.0	-29.8	2.41 V	360	41.7	2.5
6	4924.00	32.5 AV	54.0	-21.5	2.41 V	360	30.0	2.5
7	7386.00	46.3 PK	74.0	-27.7	1.00 V	152	38.6	7.7
8	7386.00	33.3 AV	54.0	-20.7	1.00 V	152	25.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.4 PK			1.07 H	268	117.8	-2.4
2	*2467.00	103.2 AV			1.07 H	268	105.6	-2.4
3	2483.50	66.3 PK	74.0	-7.7	1.07 H	268	68.7	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.07 H	268	49.2	-2.4
5	2499.94	71.8 PK	74.0	-2.2	1.07 H	268	74.2	-2.4
6	2499.94	44.6 AV	54.0	-9.4	1.07 H	268	47.0	-2.4
7	4934.00	45.7 PK	74.0	-28.3	3.87 H	309	43.3	2.4
8	4934.00	32.9 AV	54.0	-21.1	3.87 H	309	30.5	2.4
9	7401.00	47.9 PK	74.0	-26.1	3.56 H	102	40.0	7.9
10	7401.00	34.1 AV	54.0	-19.9	3.56 H	102	26.2	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.5 PK			3.25 V	287	111.9	-2.4
2	*2467.00	98.5 AV			3.25 V	287	100.9	-2.4
3	2483.50	61.6 PK	74.0	-12.4	3.25 V	287	64.0	-2.4
4	2483.50	44.8 AV	54.0	-9.2	3.25 V	287	47.2	-2.4
5	2499.94	57.8 PK	74.0	-16.2	3.25 V	287	60.2	-2.4
6	2499.94	44.0 AV	54.0	-10.0	3.25 V	287	46.4	-2.4
7	4934.00	43.5 PK	74.0	-30.5	2.38 V	360	41.1	2.4
8	4934.00	32.1 AV	54.0	-21.9	2.38 V	360	29.7	2.4
9	7401.00	46.9 PK	74.0	-27.1	1.00 V	150	39.0	7.9
10	7401.00	34.0 AV	54.0	-20.0	1.00 V	150	26.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.5 PK			1.03 H	268	113.9	-2.4
2	*2472.00	100.6 AV			1.03 H	268	103.0	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.03 H	268	74.4	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.03 H	268	53.6	-2.4
5	4944.00	45.3 PK	74.0	-28.7	3.91 H	323	42.9	2.4
6	4944.00	32.4 AV	54.0	-21.6	3.91 H	323	30.0	2.4
7	7416.00	48.7 PK	74.0	-25.3	3.58 H	112	40.7	8.0
8	7416.00	34.6 AV	54.0	-19.4	3.58 H	112	26.6	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.7 PK			1.18 V	324	110.1	-2.4
2	*2472.00	95.7 AV			1.18 V	324	98.1	-2.4
3	2483.50	67.1 PK	74.0	-6.9	1.18 V	324	69.5	-2.4
4	2483.50	47.0 AV	54.0	-7.0	1.18 V	324	49.4	-2.4
5	4944.00	43.8 PK	74.0	-30.2	2.41 V	360	41.4	2.4
6	4944.00	32.6 AV	54.0	-21.4	2.41 V	360	30.2	2.4
7	7416.00	46.6 PK	74.0	-27.4	1.00 V	172	38.6	8.0
8	7416.00	33.8 AV	54.0	-20.2	1.00 V	172	25.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.2 PK	74.0	-6.8	1.07 H	263	69.2	-2.0
2	2390.00	48.0 AV	54.0	-6.0	1.07 H	263	50.0	-2.0
3	*2412.00	115.0 PK			1.07 H	263	117.1	-2.1
4	*2412.00	102.2 AV			1.07 H	263	104.3	-2.1
5	4824.00	44.9 PK	74.0	-29.1	3.89 H	328	42.8	2.1
6	4824.00	32.0 AV	54.0	-22.0	3.89 H	328	29.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.1 PK	74.0	-10.9	1.22 V	292	65.1	-2.0
2	2390.00	45.9 AV	54.0	-8.1	1.22 V	292	47.9	-2.0
3	*2412.00	110.2 PK			1.22 V	292	112.3	-2.1
4	*2412.00	97.2 AV			1.22 V	292	99.3	-2.1
5	4824.00	44.0 PK	74.0	-30.0	2.32 V	360	41.9	2.1
6	4824.00	32.4 AV	54.0	-21.6	2.32 V	360	30.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.06 H	264	73.6	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.06 H	264	47.8	-2.0
3	*2417.00	112.7 PK			1.06 H	264	114.8	-2.1
4	*2417.00	101.3 AV			1.06 H	264	103.4	-2.1
5	4834.00	45.0 PK	74.0	-29.0	3.88 H	311	42.9	2.1
6	4834.00	32.4 AV	54.0	-21.6	3.88 H	311	30.3	2.1
7	7251.00	48.4 PK	74.0	-25.6	3.60 H	107	40.8	7.6
8	7251.00	34.2 AV	54.0	-19.8	3.60 H	107	26.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.08 V	340	60.2	-2.0
2	2390.00	44.7 AV	54.0	-9.3	1.08 V	340	46.7	-2.0
3	*2417.00	108.5 PK			1.08 V	340	110.6	-2.1
4	*2417.00	96.8 AV			1.08 V	340	98.9	-2.1
5	4834.00	44.2 PK	74.0	-29.8	2.32 V	360	42.1	2.1
6	4834.00	32.6 AV	54.0	-21.4	2.32 V	360	30.5	2.1
7	7251.00	47.0 PK	74.0	-27.0	1.00 V	157	39.4	7.6
8	7251.00	34.2 AV	54.0	-19.8	1.00 V	157	26.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.07 H	263	70.9	-2.0
2	2390.00	46.7 AV	54.0	-7.3	1.07 H	263	48.7	-2.0
3	*2437.00	115.4 PK			1.07 H	263	117.5	-2.1
4	*2437.00	103.9 AV			1.07 H	263	106.0	-2.1
5	2483.50	60.0 PK	74.0	-14.0	1.07 H	263	62.4	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.07 H	263	47.2	-2.4
7	4874.00	44.6 PK	74.0	-29.4	3.88 H	309	42.2	2.4
8	4874.00	32.1 AV	54.0	-21.9	3.88 H	309	29.7	2.4
9	7311.00	48.3 PK	74.0	-25.7	3.58 H	114	40.9	7.4
10	7311.00	34.1 AV	54.0	-19.9	3.58 H	114	26.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.02 V	325	72.9	-2.0
2	2390.00	46.0 AV	54.0	-8.0	1.02 V	325	48.0	-2.0
3	*2437.00	111.3 PK			1.02 V	325	113.4	-2.1
4	*2437.00	99.4 AV			1.02 V	325	101.5	-2.1
5	2483.50	60.9 PK	74.0	-13.1	1.02 V	325	63.3	-2.4
6	2483.50	44.5 AV	54.0	-9.5	1.02 V	325	46.9	-2.4
7	4874.00	43.9 PK	74.0	-30.1	2.43 V	360	41.5	2.4
8	4874.00	32.6 AV	54.0	-21.4	2.43 V	360	30.2	2.4
9	7311.00	46.6 PK	74.0	-27.4	1.00 V	162	39.2	7.4
10	7311.00	34.0 AV	54.0	-20.0	1.00 V	162	26.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.5 PK			1.07 H	318	114.9	-2.4
2	*2457.00	101.0 AV			1.07 H	318	103.4	-2.4
3	2483.50	66.4 PK	74.0	-7.6	1.07 H	318	68.8	-2.4
4	2483.50	45.9 AV	54.0	-8.1	1.07 H	318	48.3	-2.4
5	4914.00	45.4 PK	74.0	-28.6	3.89 H	314	42.9	2.5
6	4914.00	32.6 AV	54.0	-21.4	3.89 H	314	30.1	2.5
7	7371.00	47.6 PK	74.0	-26.4	3.62 H	111	40.0	7.6
8	7371.00	33.8 AV	54.0	-20.2	3.62 H	111	26.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.5 PK			1.51 V	318	108.9	-2.4
2	*2457.00	95.2 AV			1.51 V	318	97.6	-2.4
3	2483.50	66.8 PK	74.0	-7.2	1.51 V	318	69.2	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.51 V	318	47.2	-2.4
5	4914.00	44.0 PK	74.0	-30.0	2.43 V	360	41.5	2.5
6	4914.00	32.4 AV	54.0	-21.6	2.43 V	360	29.9	2.5
7	7371.00	46.5 PK	74.0	-27.5	1.00 V	152	38.9	7.6
8	7371.00	33.7 AV	54.0	-20.3	1.00 V	152	26.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.2 PK			1.11 H	316	114.6	-2.4
2	*2462.00	100.0 AV			1.11 H	316	102.4	-2.4
3	2483.50	67.8 PK	74.0	-6.2	1.11 H	316	70.2	-2.4
4	2483.50	45.8 AV	54.0	-8.2	1.11 H	316	48.2	-2.4
5	4924.00	45.7 PK	74.0	-28.3	3.86 H	308	43.2	2.5
6	4924.00	32.9 AV	54.0	-21.1	3.86 H	308	30.4	2.5
7	7386.00	47.8 PK	74.0	-26.2	3.54 H	129	40.1	7.7
8	7386.00	33.9 AV	54.0	-20.1	3.54 H	129	26.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.5 PK			1.54 V	325	108.9	-2.4
2	*2462.00	94.0 AV			1.54 V	325	96.4	-2.4
3	2483.50	58.7 PK	74.0	-15.3	1.54 V	325	61.1	-2.4
4	2483.50	44.7 AV	54.0	-9.3	1.54 V	325	47.1	-2.4
5	4924.00	43.9 PK	74.0	-30.1	2.39 V	360	41.4	2.5
6	4924.00	32.1 AV	54.0	-21.9	2.39 V	360	29.6	2.5
7	7386.00	46.2 PK	74.0	-27.8	1.00 V	149	38.5	7.7
8	7386.00	33.7 AV	54.0	-20.3	1.00 V	149	26.0	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.8 PK			1.04 H	266	113.2	-2.4
2	*2467.00	98.8 AV			1.04 H	266	101.2	-2.4
3	2483.50	72.1 PK	74.0	-1.9	1.04 H	266	74.5	-2.4
4	2483.50	46.6 AV	54.0	-7.4	1.04 H	266	49.0	-2.4
5	4934.00	45.9 PK	74.0	-28.1	3.89 H	329	43.5	2.4
6	4934.00	32.9 AV	54.0	-21.1	3.89 H	329	30.5	2.4
7	7401.00	48.6 PK	74.0	-25.4	3.59 H	116	40.7	7.9
8	7401.00	34.6 AV	54.0	-19.4	3.59 H	116	26.7	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.2 PK			3.25 V	286	108.6	-2.4
2	*2467.00	93.5 AV			3.25 V	286	95.9	-2.4
3	2483.50	65.0 PK	74.0	-9.0	3.25 V	286	67.4	-2.4
4	2483.50	45.4 AV	54.0	-8.6	3.25 V	286	47.8	-2.4
5	4934.00	43.4 PK	74.0	-30.6	2.43 V	360	41.0	2.4
6	4934.00	32.2 AV	54.0	-21.8	2.43 V	360	29.8	2.4
7	7401.00	46.4 PK	74.0	-27.6	1.00 V	176	38.5	7.9
8	7401.00	33.5 AV	54.0	-20.5	1.00 V	176	25.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.7 PK			1.23 H	318	112.1	-2.4
2	*2472.00	97.9 AV			1.23 H	318	100.3	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.23 H	318	74.4	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.23 H	318	54.8	-2.4
5	4944.00	45.0 PK	74.0	-29.0	3.81 H	317	42.6	2.4
6	4944.00	32.4 AV	54.0	-21.6	3.81 H	317	30.0	2.4
7	7416.00	48.0 PK	74.0	-26.0	3.58 H	113	40.0	8.0
8	7416.00	33.8 AV	54.0	-20.2	3.58 H	113	25.8	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.1 PK			3.20 V	286	107.5	-2.4
2	*2472.00	93.0 AV			3.20 V	286	95.4	-2.4
3	2483.50	66.1 PK	74.0	-7.9	3.20 V	286	68.5	-2.4
4	2483.50	47.7 AV	54.0	-6.3	3.20 V	286	50.1	-2.4
5	4944.00	44.1 PK	74.0	-29.9	2.40 V	360	41.7	2.4
6	4944.00	32.6 AV	54.0	-21.4	2.40 V	360	30.2	2.4
7	7416.00	46.7 PK	74.0	-27.3	1.00 V	176	38.7	8.0
8	7416.00	33.9 AV	54.0	-20.1	1.00 V	176	25.9	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	1.05 H	182	72.1	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.05 H	182	47.8	-2.0
3	*2412.00	114.5 PK			1.05 H	182	116.6	-2.1
4	*2412.00	102.4 AV			1.05 H	182	104.5	-2.1
5	4824.00	44.8 PK	74.0	-29.2	3.85 H	307	42.7	2.1
6	4824.00	32.2 AV	54.0	-21.8	3.85 H	307	30.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.55 V	308	64.5	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.55 V	308	46.6	-2.0
3	*2412.00	107.7 PK			1.55 V	308	109.8	-2.1
4	*2412.00	95.3 AV			1.55 V	308	97.4	-2.1
5	4824.00	43.5 PK	74.0	-30.5	2.33 V	360	41.4	2.1
6	4824.00	31.9 AV	54.0	-22.1	2.33 V	360	29.8	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.22 H	170	71.7	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.22 H	170	47.6	-2.0
3	*2417.00	114.4 PK			1.22 H	170	116.5	-2.1
4	*2417.00	101.8 AV			1.22 H	170	103.9	-2.1
5	4834.00	45.5 PK	74.0	-28.5	3.80 H	305	43.4	2.1
6	4834.00	32.5 AV	54.0	-21.5	3.80 H	305	30.4	2.1
7	7251.00	47.8 PK	74.0	-26.2	3.63 H	115	40.2	7.6
8	7251.00	34.0 AV	54.0	-20.0	3.63 H	115	26.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.53 V	309	59.7	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.53 V	309	46.5	-2.0
3	*2417.00	106.1 PK			1.53 V	309	108.2	-2.1
4	*2417.00	94.8 AV			1.53 V	309	96.9	-2.1
5	4834.00	43.7 PK	74.0	-30.3	2.37 V	360	41.6	2.1
6	4834.00	32.1 AV	54.0	-21.9	2.37 V	360	30.0	2.1
7	7251.00	46.1 PK	74.0	-27.9	1.00 V	173	38.5	7.6
8	7251.00	33.6 AV	54.0	-20.4	1.00 V	173	26.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.02 H	307	74.3	-2.0
2	2390.00	45.4 AV	54.0	-8.6	1.02 H	307	47.4	-2.0
3	*2437.00	116.8 PK			1.02 H	307	118.9	-2.1
4	*2437.00	104.3 AV			1.02 H	307	106.4	-2.1
5	2483.50	67.4 PK	74.0	-6.6	1.02 H	307	69.8	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.02 H	307	47.2	-2.4
7	4874.00	46.0 PK	74.0	-28.0	3.90 H	321	43.6	2.4
8	4874.00	33.0 AV	54.0	-21.0	3.90 H	321	30.6	2.4
9	7311.00	48.3 PK	74.0	-25.7	3.57 H	105	40.9	7.4
10	7311.00	34.4 AV	54.0	-19.6	3.57 H	105	27.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.51 V	307	70.2	-2.0
2	2390.00	44.8 AV	54.0	-9.2	1.51 V	307	46.8	-2.0
3	*2437.00	108.9 PK			1.51 V	307	111.0	-2.1
4	*2437.00	98.0 AV			1.51 V	307	100.1	-2.1
5	2483.50	58.3 PK	74.0	-15.7	1.51 V	307	60.7	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.51 V	307	46.6	-2.4
7	4874.00	44.2 PK	74.0	-29.8	2.36 V	360	41.8	2.4
8	4874.00	32.7 AV	54.0	-21.3	2.36 V	360	30.3	2.4
9	7311.00	45.9 PK	74.0	-28.1	1.00 V	165	38.5	7.4
10	7311.00	33.4 AV	54.0	-20.6	1.00 V	165	26.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.3 PK			1.02 H	309	116.7	-2.4
2	*2457.00	102.4 AV			1.02 H	309	104.8	-2.4
3	2483.50	70.1 PK	74.0	-3.9	1.02 H	309	72.5	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.02 H	309	48.0	-2.4
5	4914.00	45.4 PK	74.0	-28.6	3.90 H	325	42.9	2.5
6	4914.00	32.4 AV	54.0	-21.6	3.90 H	325	29.9	2.5
7	7371.00	47.9 PK	74.0	-26.1	3.54 H	102	40.3	7.6
8	7371.00	33.8 AV	54.0	-20.2	3.54 H	102	26.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.9 PK			1.52 V	310	110.3	-2.4
2	*2457.00	96.1 AV			1.52 V	310	98.5	-2.4
3	2483.50	66.4 PK	74.0	-7.6	1.52 V	310	68.8	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.52 V	310	47.2	-2.4
5	4914.00	43.8 PK	74.0	-30.2	2.35 V	360	41.3	2.5
6	4914.00	32.3 AV	54.0	-21.7	2.35 V	360	29.8	2.5
7	7371.00	46.6 PK	74.0	-27.4	1.00 V	159	39.0	7.6
8	7371.00	33.9 AV	54.0	-20.1	1.00 V	159	26.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.4 PK			1.02 H	308	114.8	-2.4
2	*2462.00	101.5 AV			1.02 H	308	103.9	-2.4
3	2483.50	71.9 PK	74.0	-2.1	1.02 H	308	74.3	-2.4
4	2483.50	46.2 AV	54.0	-7.8	1.02 H	308	48.6	-2.4
5	4924.00	45.6 PK	74.0	-28.4	3.87 H	317	43.1	2.5
6	4924.00	32.6 AV	54.0	-21.4	3.87 H	317	30.1	2.5
7	7386.00	48.0 PK	74.0	-26.0	3.60 H	130	40.3	7.7
8	7386.00	33.9 AV	54.0	-20.1	3.60 H	130	26.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.0 PK			1.57 V	309	109.4	-2.4
2	*2462.00	96.3 AV			1.57 V	309	98.7	-2.4
3	2483.50	67.6 PK	74.0	-6.4	1.57 V	309	70.0	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.57 V	309	47.2	-2.4
5	4924.00	44.2 PK	74.0	-29.8	2.34 V	360	41.7	2.5
6	4924.00	32.7 AV	54.0	-21.3	2.34 V	360	30.2	2.5
7	7386.00	46.2 PK	74.0	-27.8	1.00 V	177	38.5	7.7
8	7386.00	33.6 AV	54.0	-20.4	1.00 V	177	25.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.3 PK			1.01 H	309	115.7	-2.4
2	*2467.00	101.4 AV			1.01 H	309	103.8	-2.4
3	2483.50	67.4 PK	74.0	-6.6	1.01 H	309	69.8	-2.4
4	2483.50	46.9 AV	54.0	-7.1	1.01 H	309	49.3	-2.4
5	4934.00	45.6 PK	74.0	-28.4	3.90 H	302	43.2	2.4
6	4934.00	32.6 AV	54.0	-21.4	3.90 H	302	30.2	2.4
7	7401.00	48.6 PK	74.0	-25.4	3.60 H	113	40.7	7.9
8	7401.00	34.3 AV	54.0	-19.7	3.60 H	113	26.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.7 PK			1.51 V	315	110.1	-2.4
2	*2467.00	96.5 AV			1.51 V	315	98.9	-2.4
3	2483.50	65.2 PK	74.0	-8.8	1.51 V	315	67.6	-2.4
4	2483.50	45.1 AV	54.0	-8.9	1.51 V	315	47.5	-2.4
5	4934.00	44.4 PK	74.0	-29.6	2.41 V	360	42.0	2.4
6	4934.00	32.8 AV	54.0	-21.2	2.41 V	360	30.4	2.4
7	7401.00	46.7 PK	74.0	-27.3	1.00 V	165	38.8	7.9
8	7401.00	34.2 AV	54.0	-19.8	1.00 V	165	26.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.2 PK			1.20 H	315	114.6	-2.4
2	*2472.00	100.9 AV			1.20 H	315	103.3	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.20 H	315	74.4	-2.4
4	2483.50	50.0 AV	54.0	-4.0	1.20 H	315	52.4	-2.4
5	4944.00	45.4 PK	74.0	-28.6	3.89 H	310	43.0	2.4
6	4944.00	32.5 AV	54.0	-21.5	3.89 H	310	30.1	2.4
7	7416.00	48.4 PK	74.0	-25.6	3.56 H	112	40.4	8.0
8	7416.00	34.2 AV	54.0	-19.8	3.56 H	112	26.2	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.2 PK			1.50 V	313	108.6	-2.4
2	*2472.00	95.4 AV			1.50 V	313	97.8	-2.4
3	2483.50	66.8 PK	74.0	-7.2	1.50 V	313	69.2	-2.4
4	2483.50	48.1 AV	54.0	-5.9	1.50 V	313	50.5	-2.4
5	4944.00	44.0 PK	74.0	-30.0	2.35 V	360	41.6	2.4
6	4944.00	32.4 AV	54.0	-21.6	2.35 V	360	30.0	2.4
7	7416.00	46.3 PK	74.0	-27.7	1.00 V	169	38.3	8.0
8	7416.00	33.5 AV	54.0	-20.5	1.00 V	169	25.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.11 H	318	74.3	-2.0
2	2390.00	51.4 AV	54.0	-2.6	1.11 H	318	53.4	-2.0
3	*2412.00	113.1 PK			1.11 H	318	115.2	-2.1
4	*2412.00	101.7 AV			1.11 H	318	103.8	-2.1
5	4824.00	45.6 PK	74.0	-28.4	3.91 H	305	43.5	2.1
6	4824.00	32.8 AV	54.0	-21.2	3.91 H	305	30.7	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.07 V	340	71.1	-2.0
2	2390.00	49.7 AV	54.0	-4.3	1.07 V	340	51.7	-2.0
3	*2412.00	109.6 PK			1.07 V	340	111.7	-2.1
4	*2412.00	97.4 AV			1.07 V	340	99.5	-2.1
5	4824.00	43.5 PK	74.0	-30.5	2.39 V	360	41.4	2.1
6	4824.00	32.2 AV	54.0	-21.8	2.39 V	360	30.1	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	1.12 H	318	71.6	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.12 H	318	47.6	-2.0
3	*2417.00	110.9 PK			1.12 H	318	113.0	-2.1
4	*2417.00	99.8 AV			1.12 H	318	101.9	-2.1
5	4834.00	44.7 PK	74.0	-29.3	3.85 H	309	42.6	2.1
6	4834.00	32.1 AV	54.0	-21.9	3.85 H	309	30.0	2.1
7	7251.00	48.8 PK	74.0	-25.2	3.57 H	115	41.2	7.6
8	7251.00	34.6 AV	54.0	-19.4	3.57 H	115	27.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.07 V	340	72.6	-2.0
2	2390.00	45.4 AV	54.0	-8.6	1.07 V	340	47.4	-2.0
3	*2417.00	107.6 PK			1.07 V	340	109.7	-2.1
4	*2417.00	96.0 AV			1.07 V	340	98.1	-2.1
5	4834.00	44.3 PK	74.0	-29.7	2.35 V	360	42.2	2.1
6	4834.00	32.6 AV	54.0	-21.4	2.35 V	360	30.5	2.1
7	7251.00	46.8 PK	74.0	-27.2	1.00 V	173	39.2	7.6
8	7251.00	34.0 AV	54.0	-20.0	1.00 V	173	26.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	1.27 H	316	71.5	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.27 H	316	48.5	-2.0
3	*2437.00	114.3 PK			1.27 H	316	116.4	-2.1
4	*2437.00	102.9 AV			1.27 H	316	105.0	-2.1
5	2483.50	62.0 PK	74.0	-12.0	1.27 H	316	64.4	-2.4
6	2483.50	45.0 AV	54.0	-9.0	1.27 H	316	47.4	-2.4
7	4874.00	44.7 PK	74.0	-29.3	3.85 H	300	42.3	2.4
8	4874.00	32.1 AV	54.0	-21.9	3.85 H	300	29.7	2.4
9	7311.00	48.8 PK	74.0	-25.2	3.53 H	123	41.4	7.4
10	7311.00	34.5 AV	54.0	-19.5	3.53 H	123	27.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.02 V	324	72.9	-2.0
2	2390.00	46.0 AV	54.0	-8.0	1.02 V	324	48.0	-2.0
3	*2437.00	109.5 PK			1.02 V	324	111.6	-2.1
4	*2437.00	98.5 AV			1.02 V	324	100.6	-2.1
5	2483.50	60.1 PK	74.0	-13.9	1.02 V	324	62.5	-2.4
6	2483.50	44.4 AV	54.0	-9.6	1.02 V	324	46.8	-2.4
7	4874.00	43.6 PK	74.0	-30.4	2.32 V	360	41.2	2.4
8	4874.00	32.1 AV	54.0	-21.9	2.32 V	360	29.7	2.4
9	7311.00	46.9 PK	74.0	-27.1	1.00 V	155	39.5	7.4
10	7311.00	34.0 AV	54.0	-20.0	1.00 V	155	26.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	110.5 PK			1.27 H	317	112.9	-2.4
2	*2457.00	99.4 AV			1.27 H	317	101.8	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.27 H	317	74.4	-2.4
4	2483.50	47.0 AV	54.0	-7.0	1.27 H	317	49.4	-2.4
5	4914.00	45.1 PK	74.0	-28.9	3.80 H	301	42.6	2.5
6	4914.00	32.5 AV	54.0	-21.5	3.80 H	301	30.0	2.5
7	7371.00	47.9 PK	74.0	-26.1	3.54 H	119	40.3	7.6
8	7371.00	33.7 AV	54.0	-20.3	3.54 H	119	26.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.8 PK			1.52 V	318	107.2	-2.4
2	*2457.00	93.5 AV			1.52 V	318	95.9	-2.4
3	2483.50	58.9 PK	74.0	-15.1	1.52 V	318	61.3	-2.4
4	2483.50	44.3 AV	54.0	-9.7	1.52 V	318	46.7	-2.4
5	4914.00	43.9 PK	74.0	-30.1	2.41 V	360	41.4	2.5
6	4914.00	32.7 AV	54.0	-21.3	2.41 V	360	30.2	2.5
7	7371.00	46.8 PK	74.0	-27.2	1.00 V	178	39.2	7.6
8	7371.00	34.3 AV	54.0	-19.7	1.00 V	178	26.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.8 PK			1.01 H	312	114.2	-2.4
2	*2462.00	99.2 AV			1.01 H	312	101.6	-2.4
3	2483.50	69.5 PK	74.0	-4.5	1.01 H	312	71.9	-2.4
4	2483.50	47.0 AV	54.0	-7.0	1.01 H	312	49.4	-2.4
5	4924.00	45.4 PK	74.0	-28.6	3.81 H	306	42.9	2.5
6	4924.00	32.4 AV	54.0	-21.6	3.81 H	306	29.9	2.5
7	7386.00	48.1 PK	74.0	-25.9	3.58 H	108	40.4	7.7
8	7386.00	34.1 AV	54.0	-19.9	3.58 H	108	26.4	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.8 PK			1.53 V	313	106.2	-2.4
2	*2462.00	92.4 AV			1.53 V	313	94.8	-2.4
3	2483.50	60.7 PK	74.0	-13.3	1.53 V	313	63.1	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.53 V	313	46.9	-2.4
5	4924.00	43.5 PK	74.0	-30.5	2.42 V	360	41.0	2.5
6	4924.00	32.0 AV	54.0	-22.0	2.42 V	360	29.5	2.5
7	7386.00	46.7 PK	74.0	-27.3	1.00 V	160	39.0	7.7
8	7386.00	34.2 AV	54.0	-19.8	1.00 V	160	26.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.8 PK			1.00 H	309	112.2	-2.4
2	*2467.00	97.6 AV			1.00 H	309	100.0	-2.4
3	2483.50	70.2 PK	74.0	-3.8	1.00 H	309	72.6	-2.4
4	2483.50	47.7 AV	54.0	-6.3	1.00 H	309	50.1	-2.4
5	4934.00	44.9 PK	74.0	-29.1	3.80 H	304	42.5	2.4
6	4934.00	32.0 AV	54.0	-22.0	3.80 H	304	29.6	2.4
7	7401.00	48.3 PK	74.0	-25.7	3.52 H	112	40.4	7.9
8	7401.00	34.1 AV	54.0	-19.9	3.52 H	112	26.2	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.4 PK			1.56 V	325	105.8	-2.4
2	*2467.00	91.3 AV			1.56 V	325	93.7	-2.4
3	2483.50	64.5 PK	74.0	-9.5	1.56 V	325	66.9	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.56 V	325	47.2	-2.4
5	4934.00	43.7 PK	74.0	-30.3	2.32 V	360	41.3	2.4
6	4934.00	32.4 AV	54.0	-21.6	2.32 V	360	30.0	2.4
7	7401.00	46.9 PK	74.0	-27.1	1.00 V	167	39.0	7.9
8	7401.00	34.2 AV	54.0	-19.8	1.00 V	167	26.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.4 PK			1.22 H	313	111.8	-2.4
2	*2472.00	97.5 AV			1.22 H	313	99.9	-2.4
3	2483.50	70.5 PK	74.0	-3.5	1.22 H	313	72.9	-2.4
4	2483.50	51.0 AV	54.0	-3.0	1.22 H	313	53.4	-2.4
5	4944.00	45.4 PK	74.0	-28.6	3.87 H	309	43.0	2.4
6	4944.00	32.8 AV	54.0	-21.2	3.87 H	309	30.4	2.4
7	7416.00	47.9 PK	74.0	-26.1	3.58 H	129	39.9	8.0
8	7416.00	34.0 AV	54.0	-20.0	3.58 H	129	26.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.3 PK			1.54 V	309	104.7	-2.4
2	*2472.00	91.1 AV			1.54 V	309	93.5	-2.4
3	2483.50	62.5 PK	74.0	-11.5	1.54 V	309	64.9	-2.4
4	2483.50	46.0 AV	54.0	-8.0	1.54 V	309	48.4	-2.4
5	4944.00	44.4 PK	74.0	-29.6	2.36 V	360	42.0	2.4
6	4944.00	32.6 AV	54.0	-21.4	2.36 V	360	30.2	2.4
7	7416.00	45.9 PK	74.0	-28.1	1.00 V	152	37.9	8.0
8	7416.00	33.5 AV	54.0	-20.5	1.00 V	152	25.5	8.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

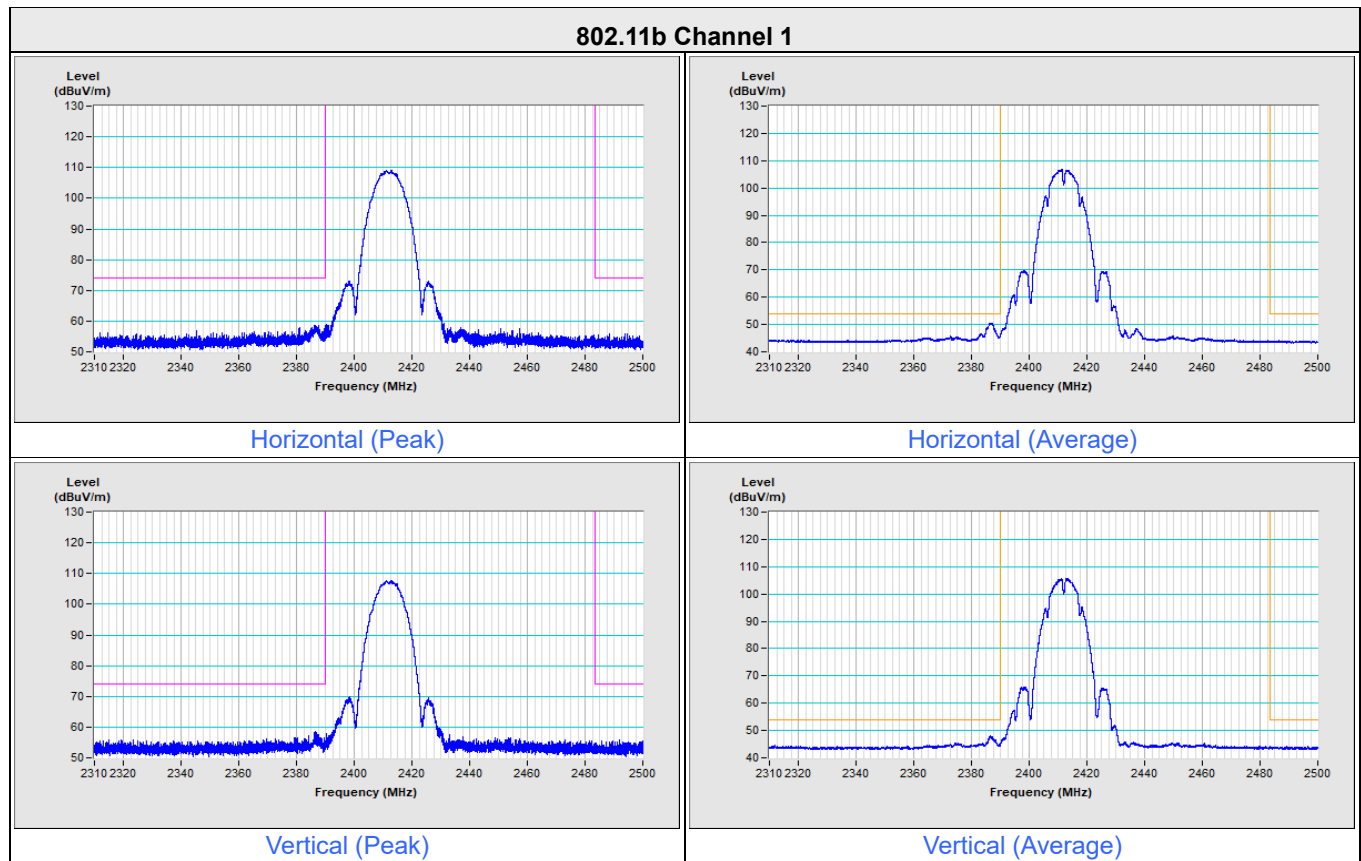


802.11b Channel 2

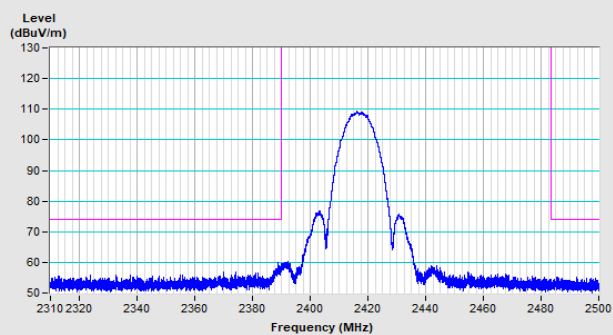


Horizontal (Peak)

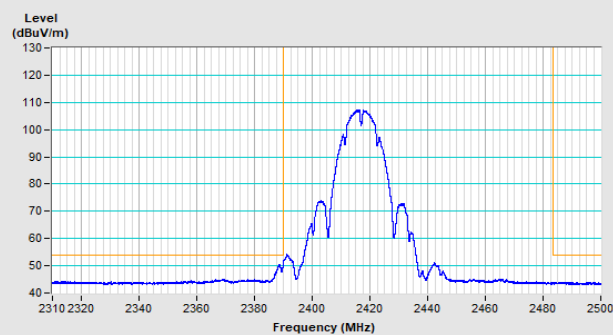

Horizontal (Average)

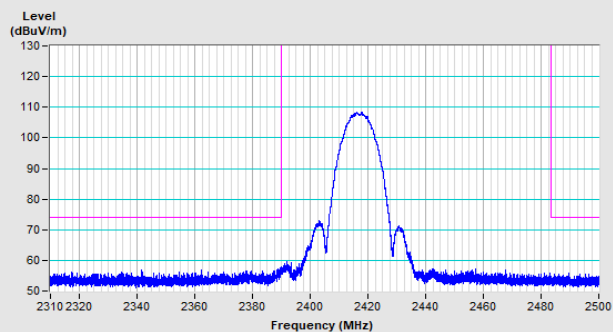


Vertical (Peak)

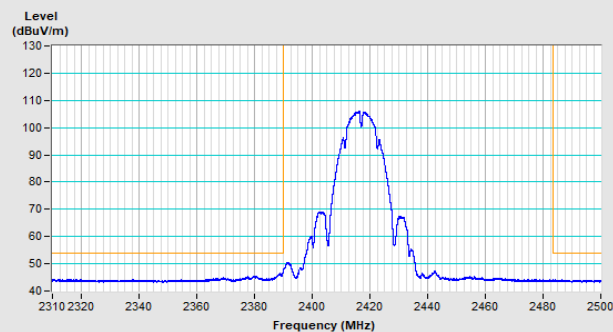


Vertical (Average)


802.11b Channel 10

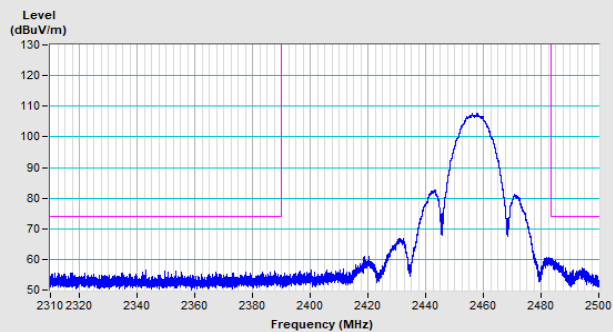


Horizontal (Peak)

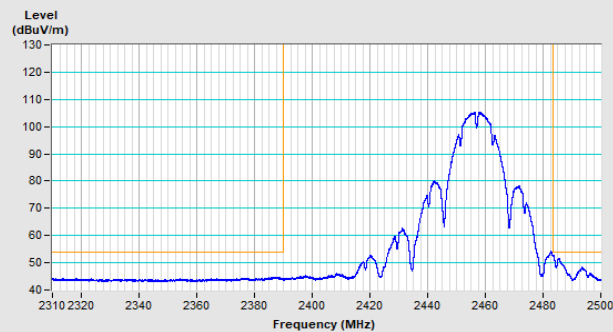

Horizontal (Average)

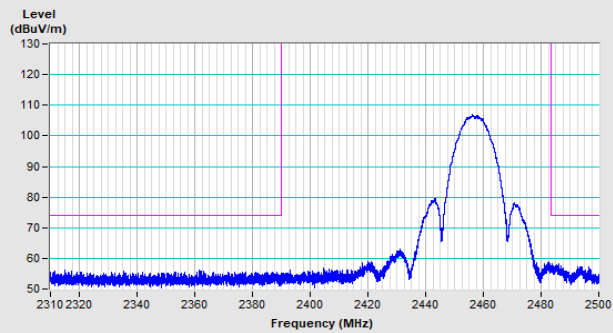


Vertical (Peak)

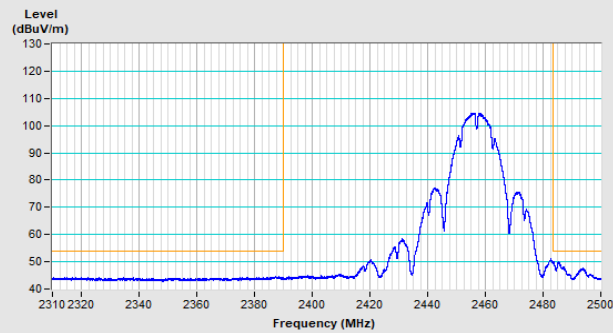


Vertical (Average)


802.11b Channel 11

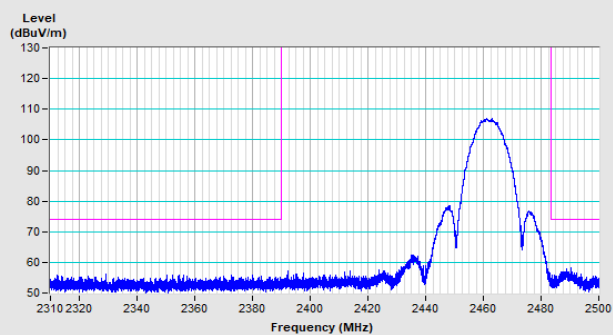


Horizontal (Peak)

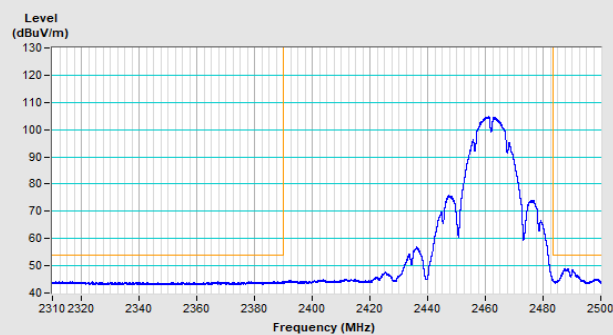

Horizontal (Average)

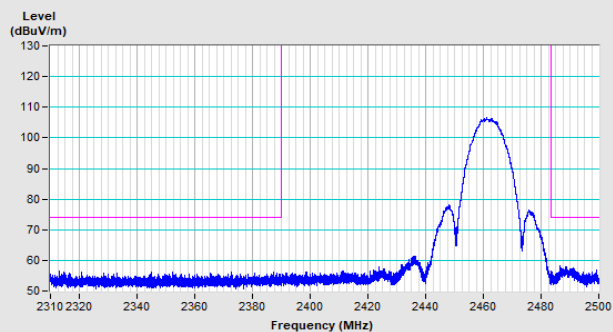


Vertical (Peak)

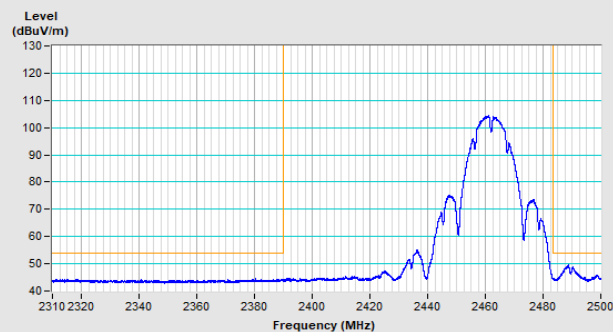


Vertical (Average)


802.11b Channel 12

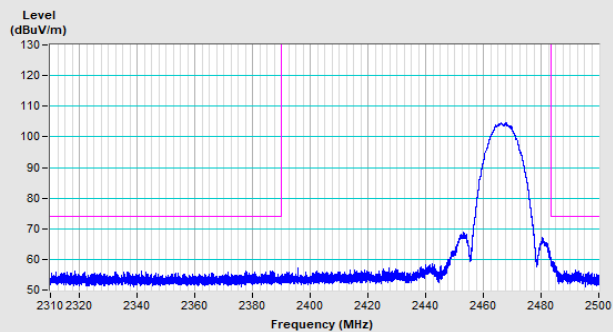


Horizontal (Peak)

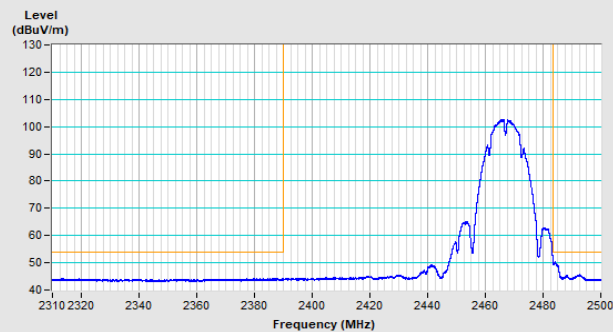

Horizontal (Average)

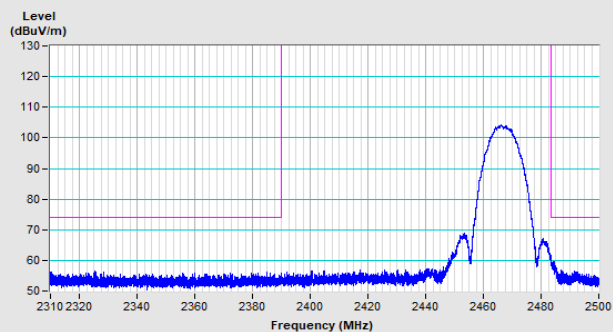


Vertical (Peak)

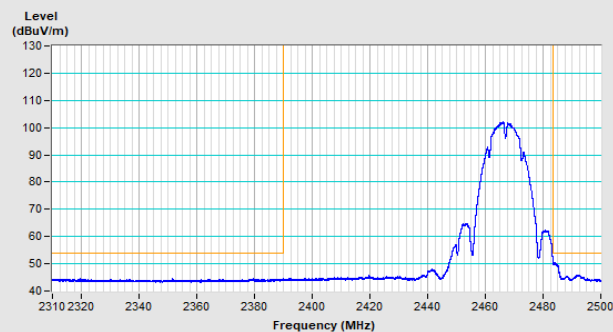


Vertical (Average)


802.11b Channel 13

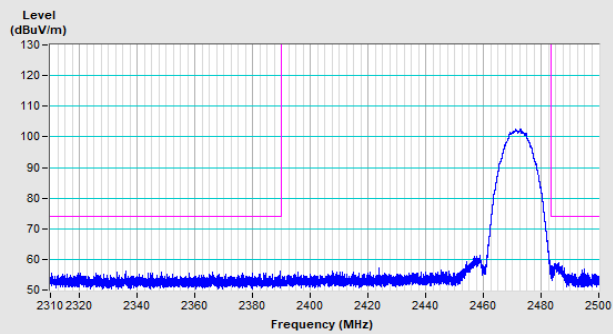


Horizontal (Peak)

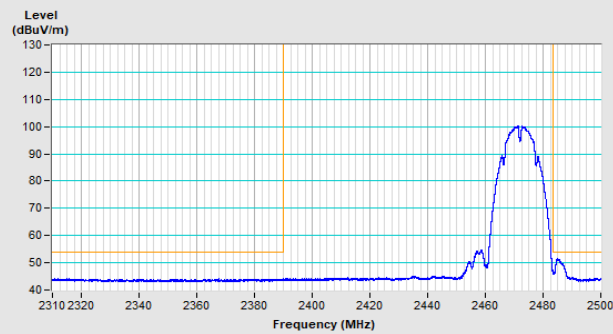

Horizontal (Average)

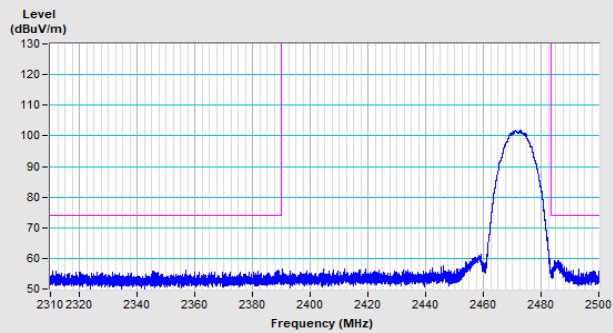


Vertical (Peak)

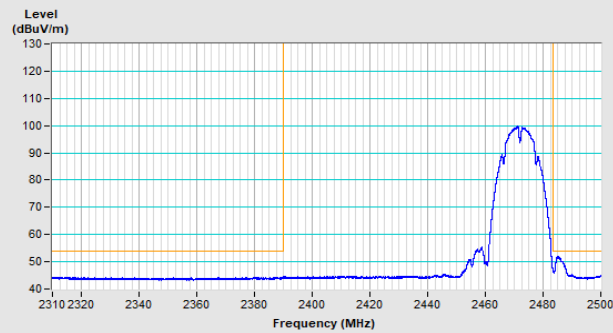


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

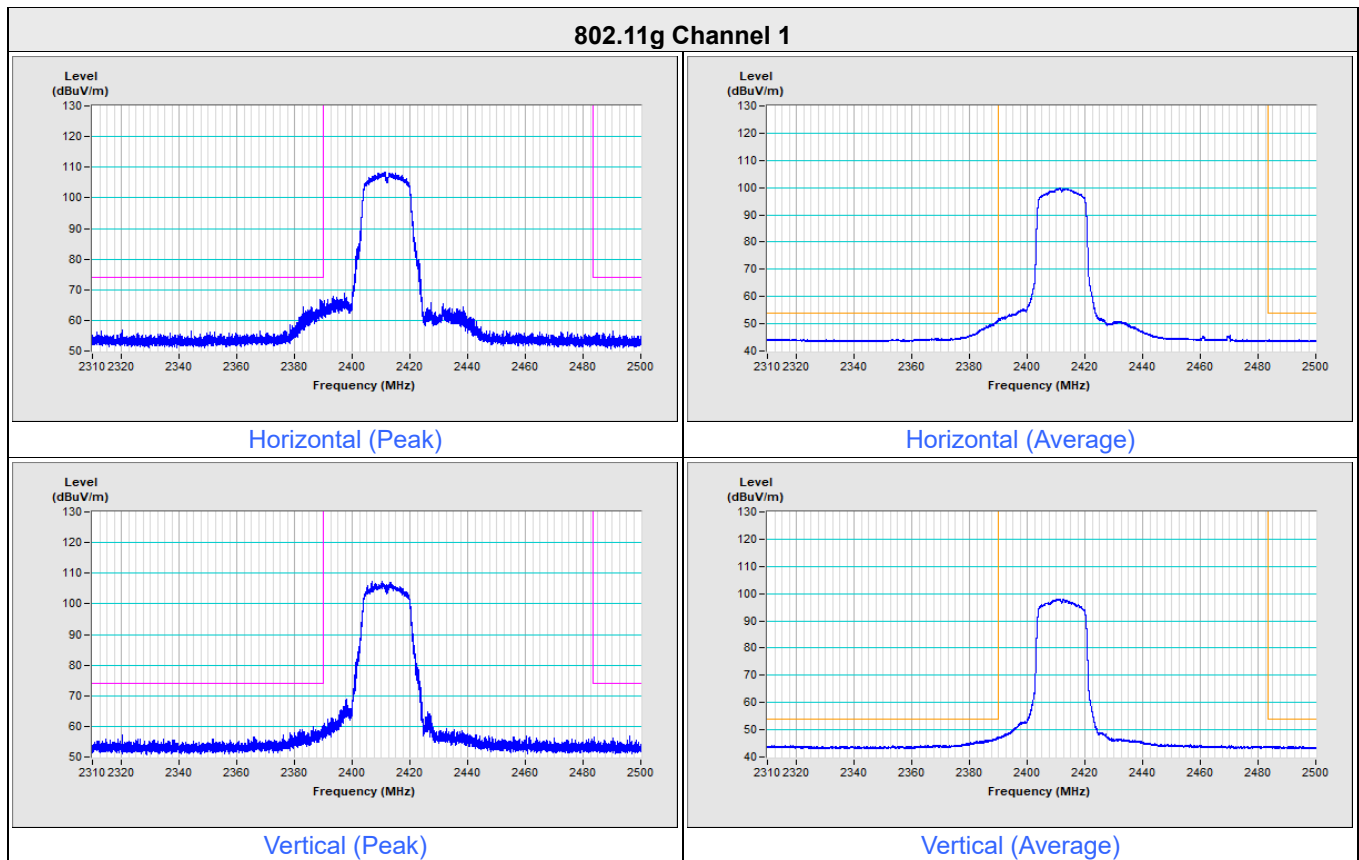


802.11g Channel 2

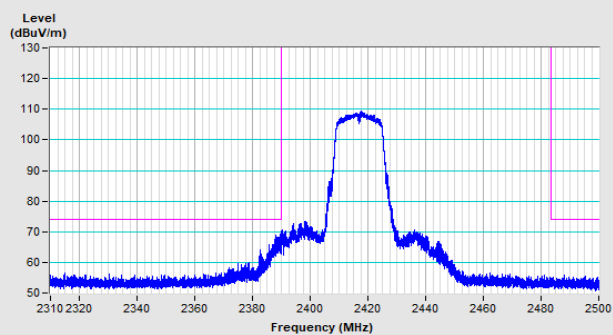


Horizontal (Peak)

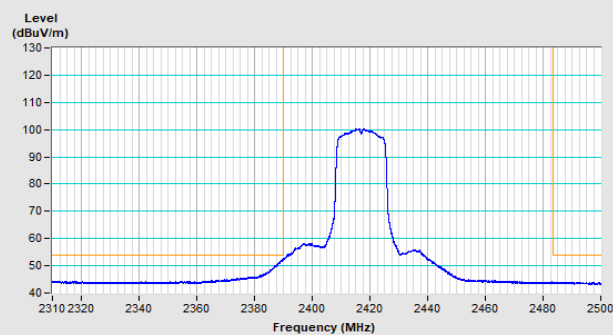

Horizontal (Average)

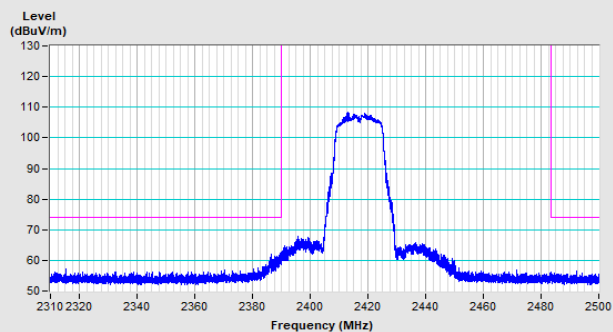


Vertical (Peak)

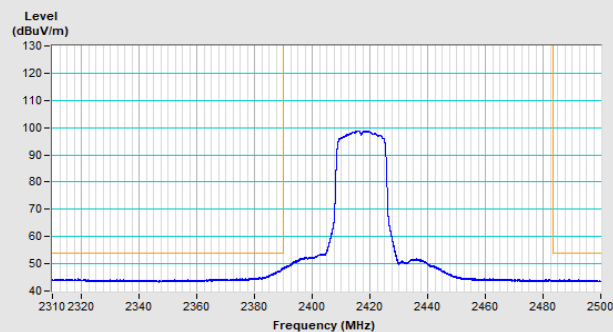


Vertical (Average)


802.11g Channel 10

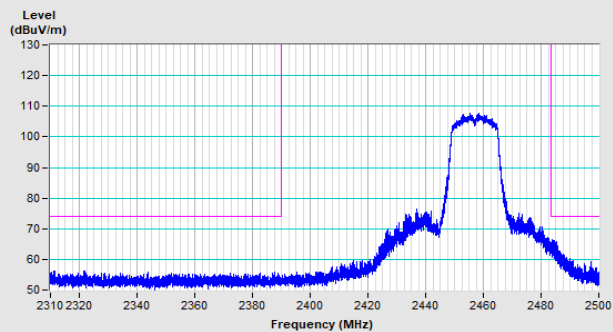


Horizontal (Peak)

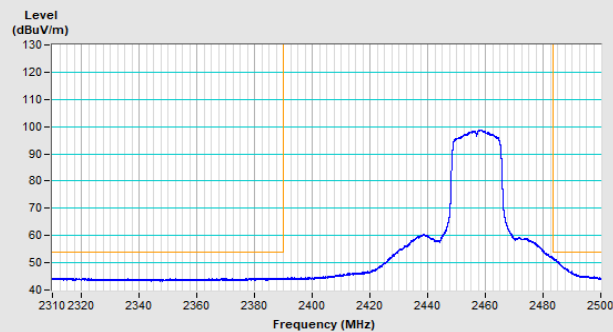

Horizontal (Average)

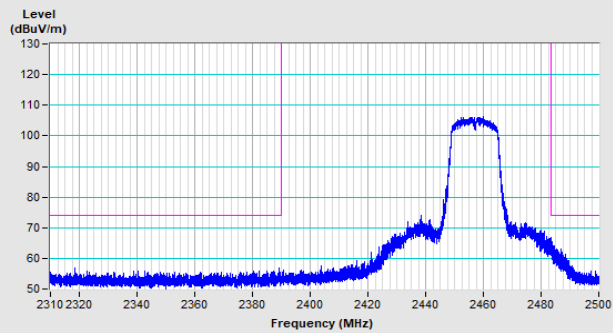


Vertical (Peak)

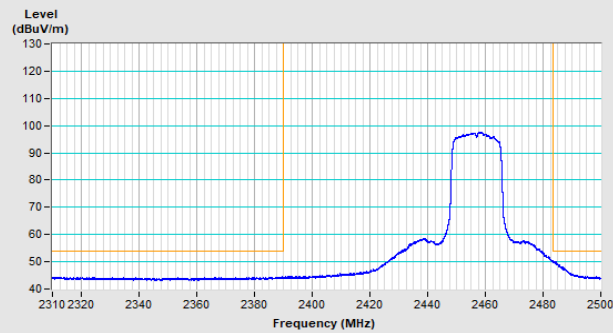


Vertical (Average)


802.11g Channel 11

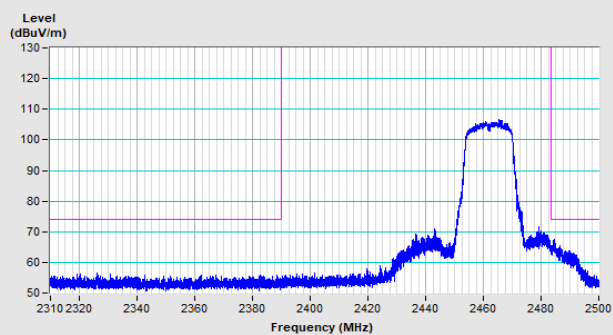


Horizontal (Peak)

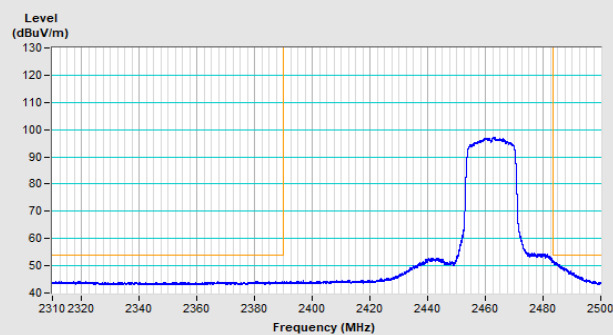

Horizontal (Average)

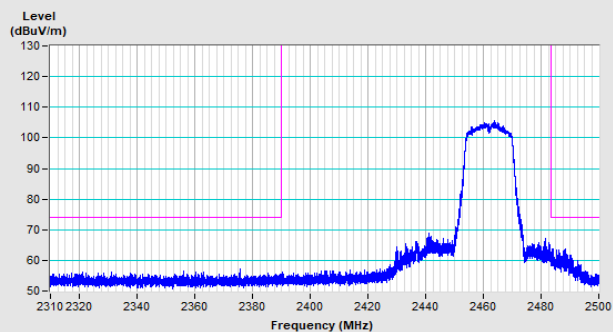


Vertical (Peak)

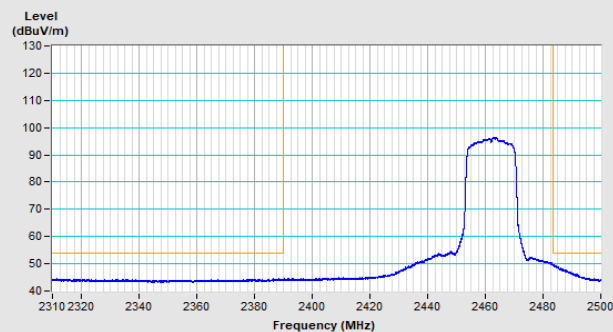


Vertical (Average)


802.11g Channel 12

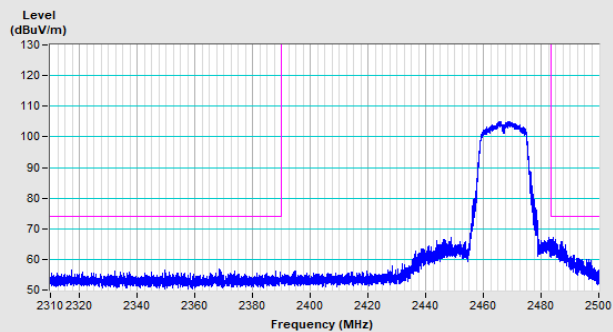


Horizontal (Peak)

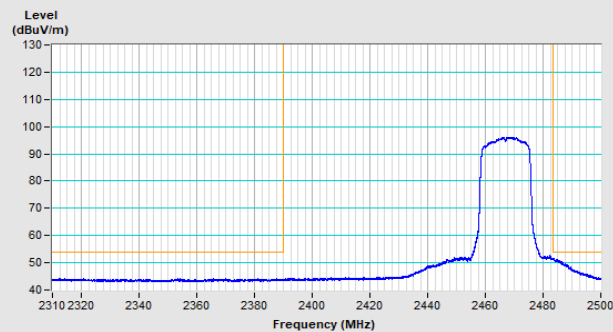

Horizontal (Average)

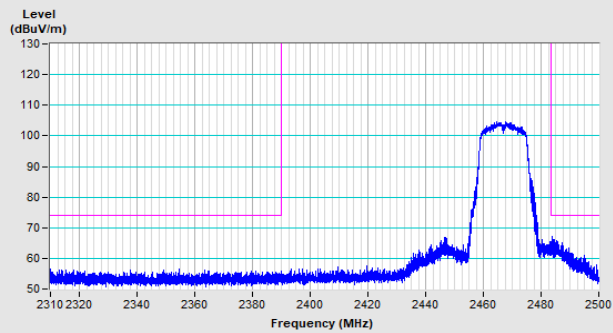


Vertical (Peak)

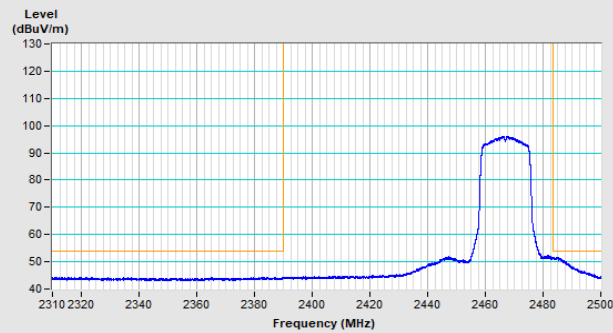


Vertical (Average)


802.11g Channel 13

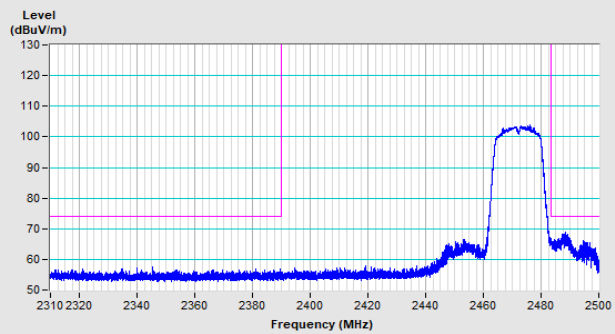


Horizontal (Peak)

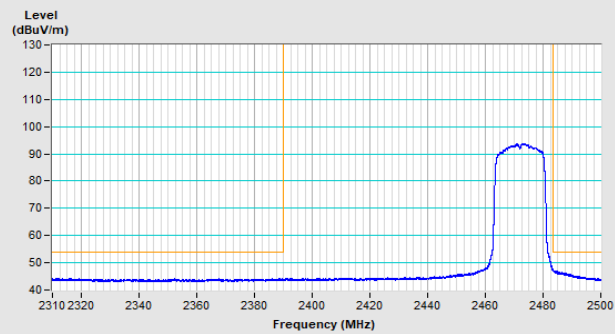

Horizontal (Average)

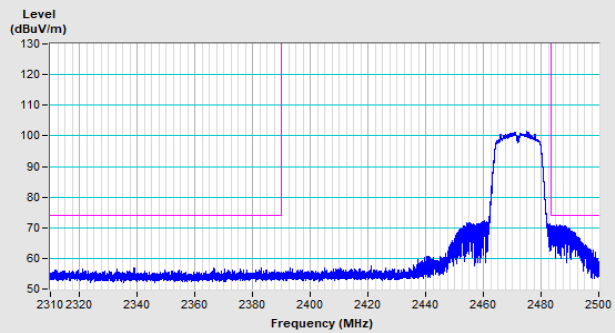


Vertical (Peak)

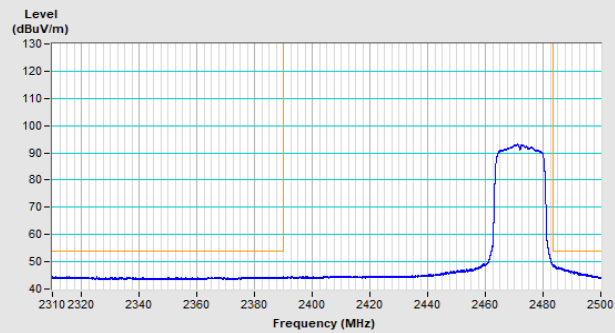


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 1

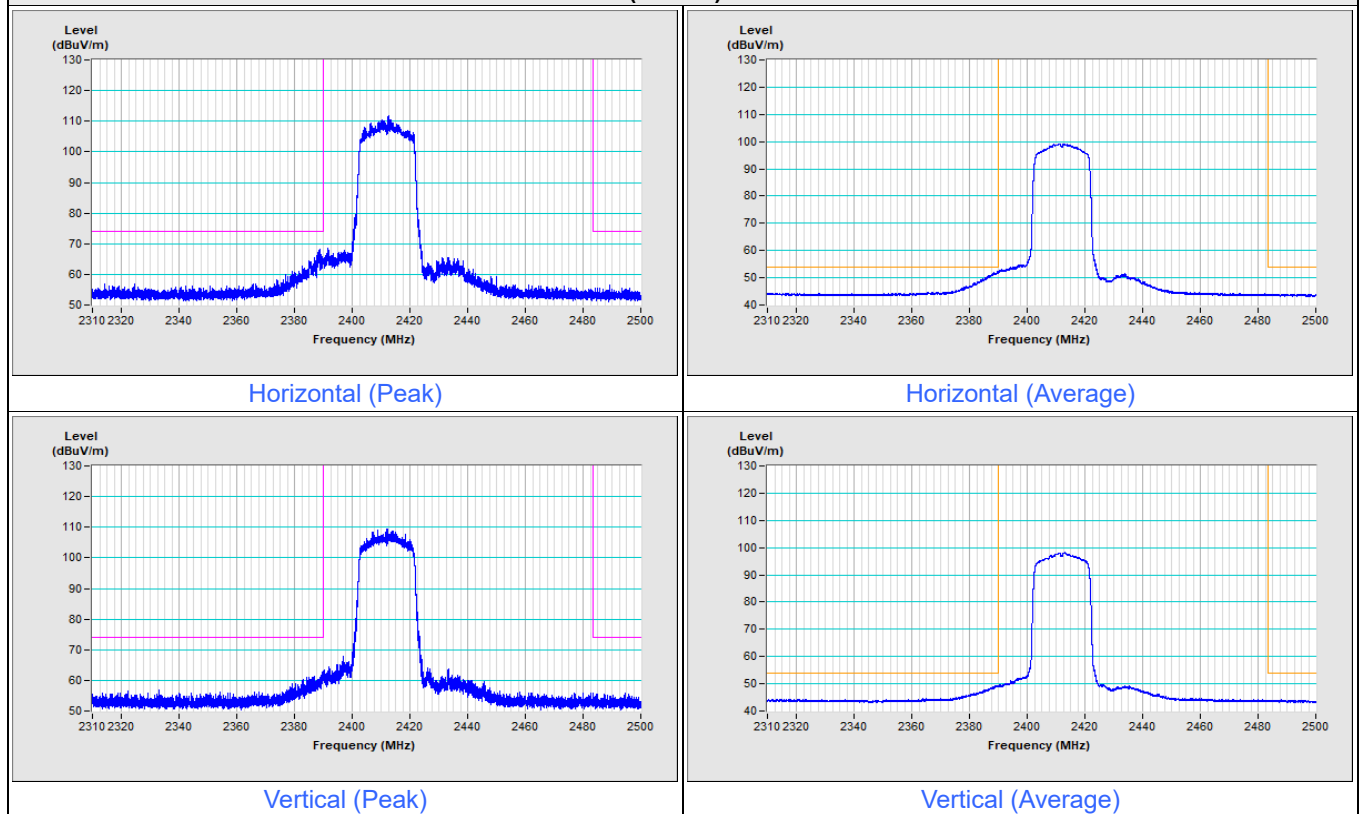


802.11be (EHT20) Channel 2

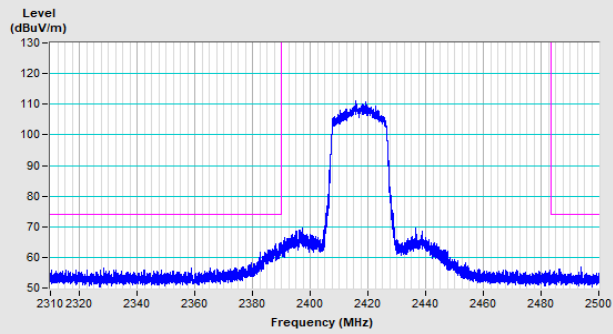


Horizontal (Peak)

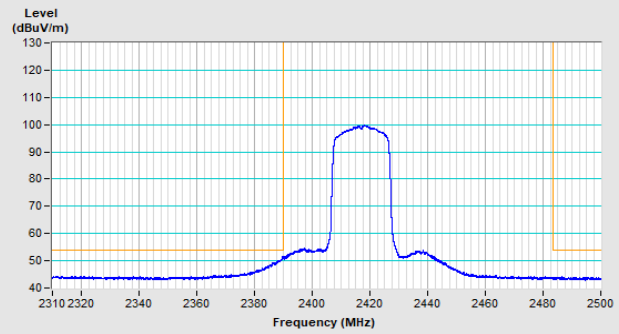

Horizontal (Average)

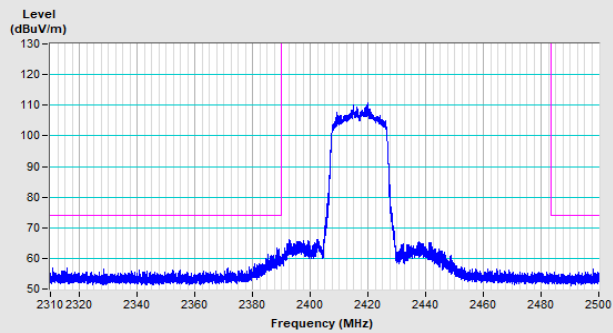


Vertical (Peak)

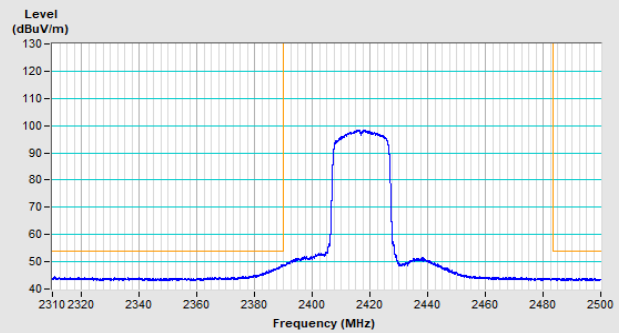


Vertical (Average)


802.11be (EHT20) Channel 10

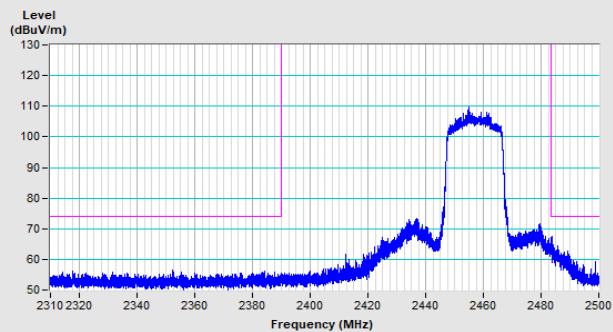


Horizontal (Peak)

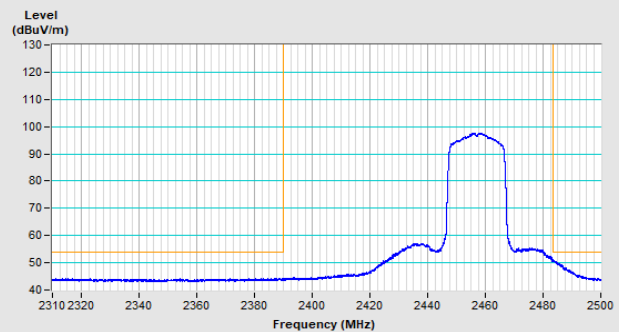

Horizontal (Average)

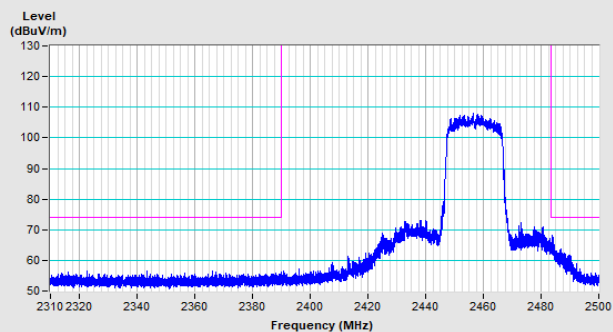


Vertical (Peak)

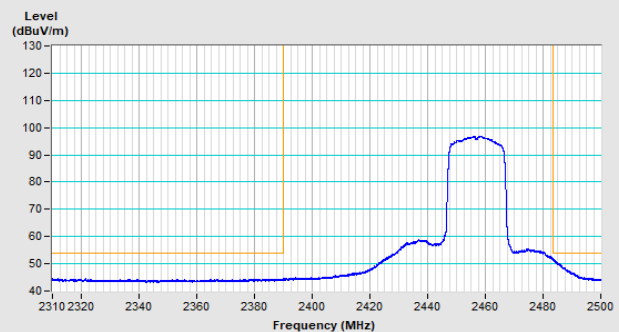


Vertical (Average)


802.11be (EHT20) Channel 11

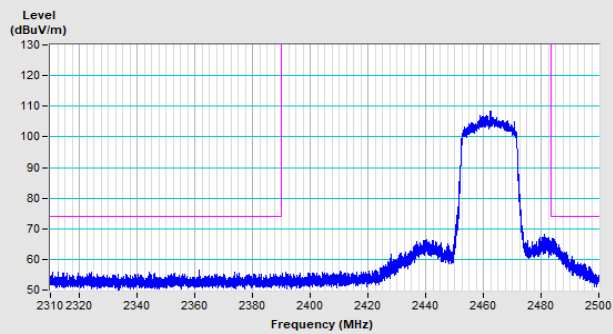


Horizontal (Peak)

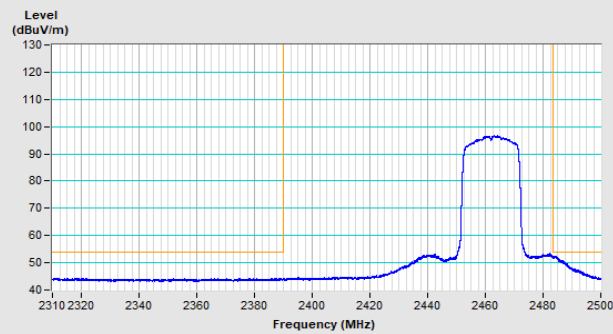

Horizontal (Average)

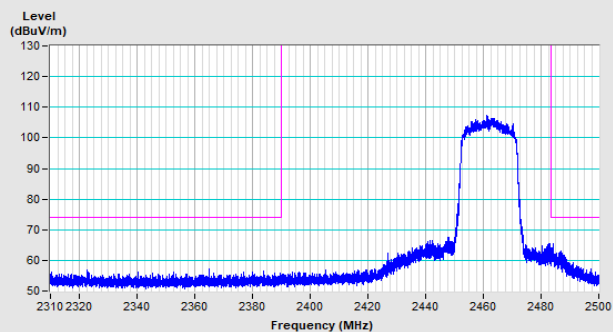


Vertical (Peak)

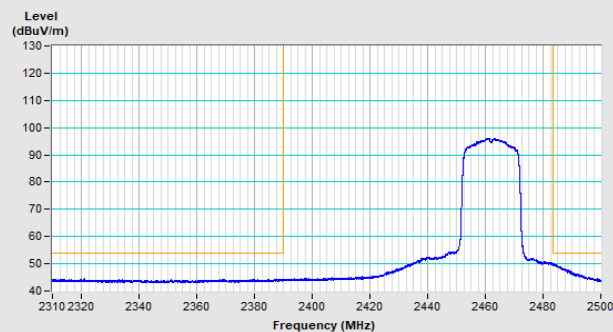


Vertical (Average)


802.11be (EHT20) Channel 12

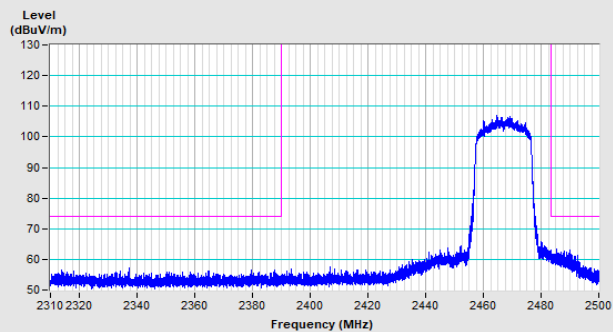


Horizontal (Peak)

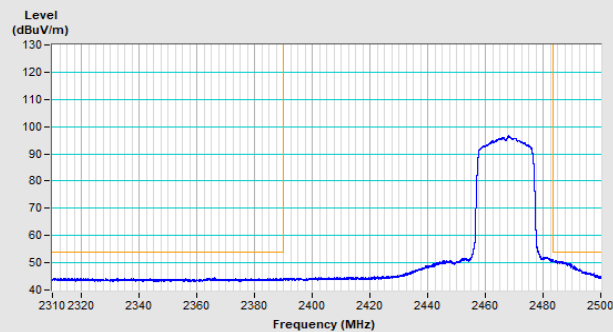

Horizontal (Average)

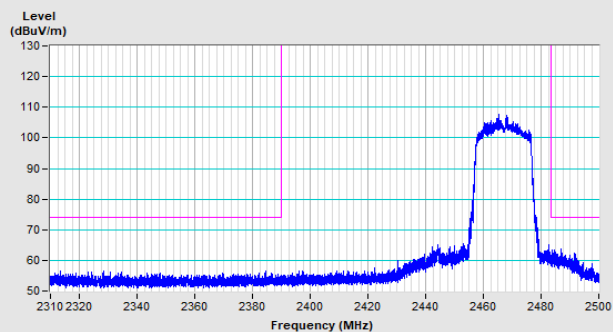


Vertical (Peak)

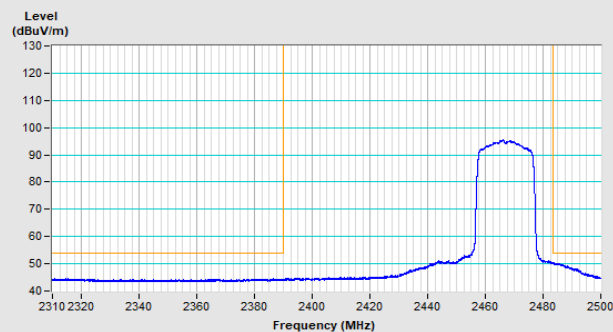


Vertical (Average)


802.11be (EHT20) Channel 13

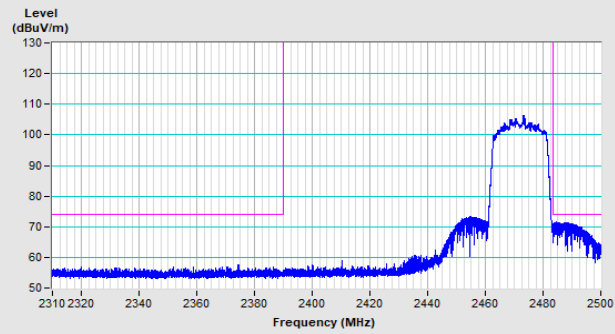


Horizontal (Peak)

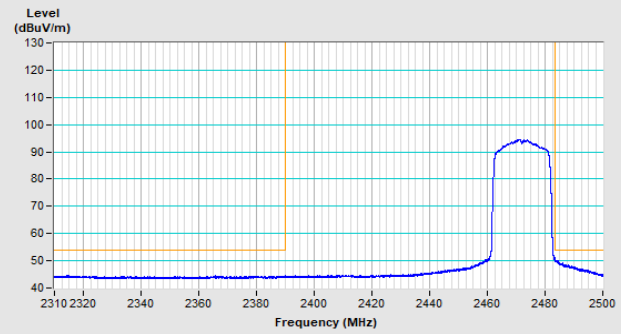

Horizontal (Average)

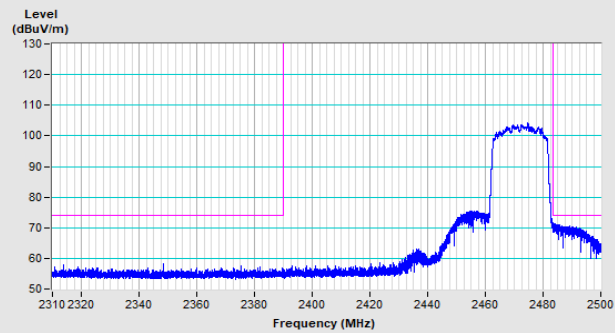


Vertical (Peak)

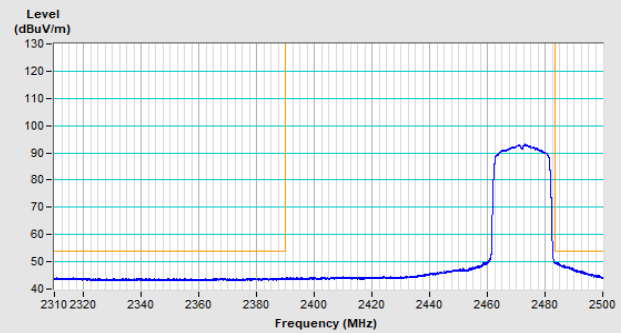


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

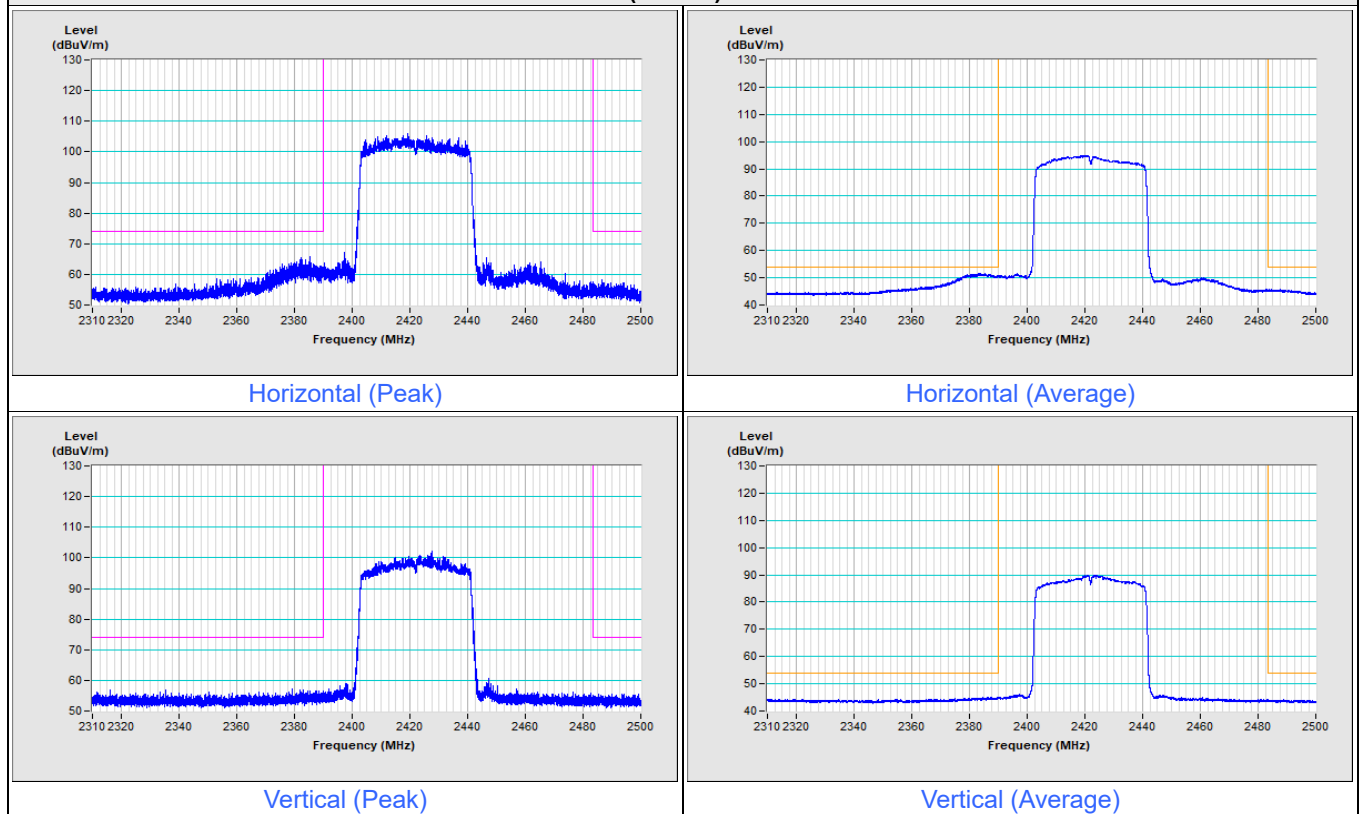


802.11be (EHT40) Channel 9

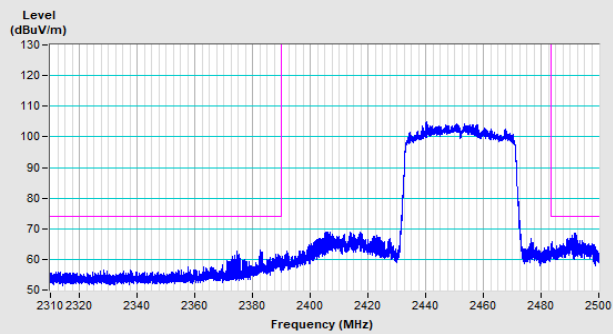


Horizontal (Peak)

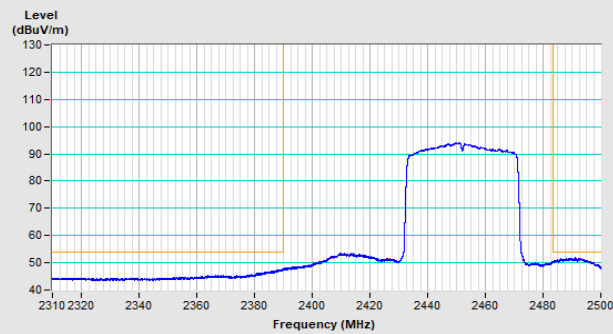

Horizontal (Average)

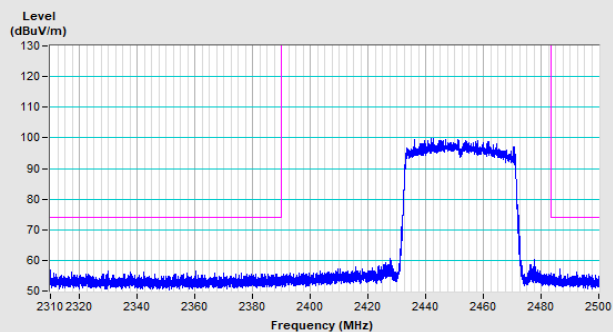


Vertical (Peak)

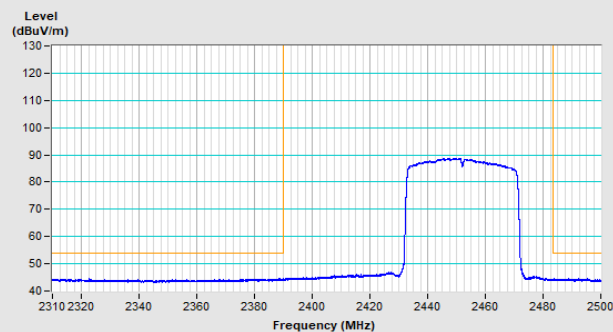


Vertical (Average)


802.11be (EHT40) Channel 10

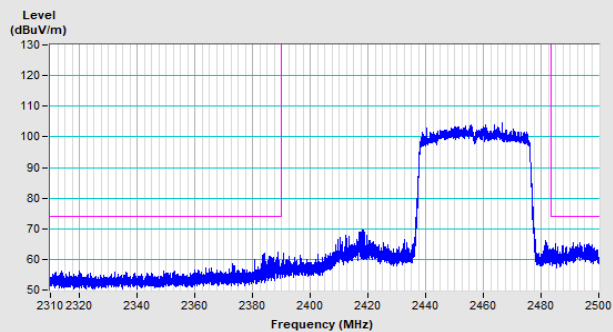


Horizontal (Peak)

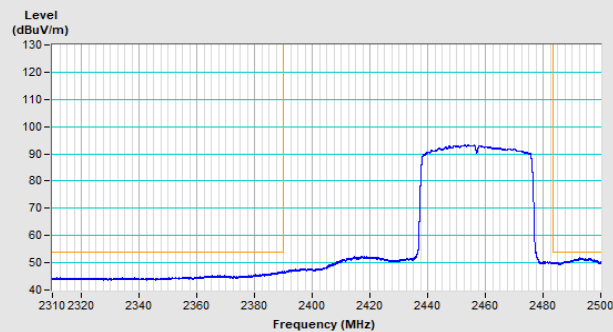

Horizontal (Average)

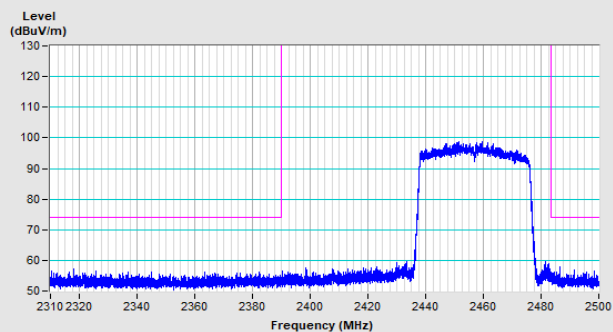


Vertical (Peak)

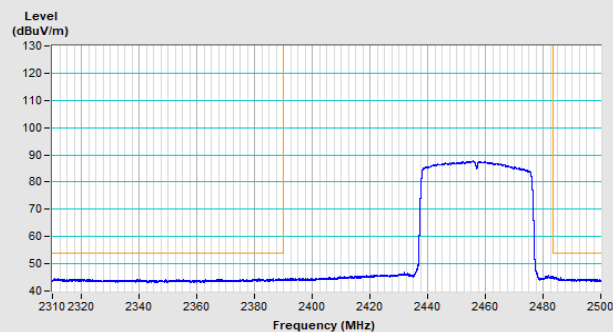


Vertical (Average)


802.11be (EHT40) Channel 11

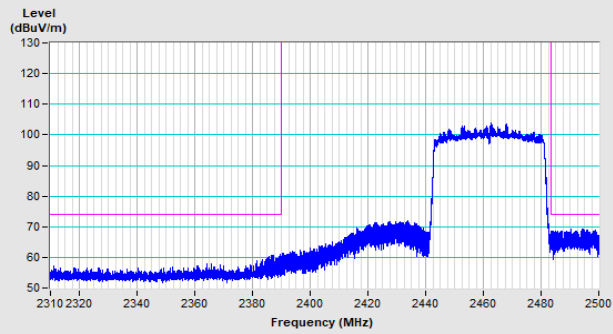


Horizontal (Peak)

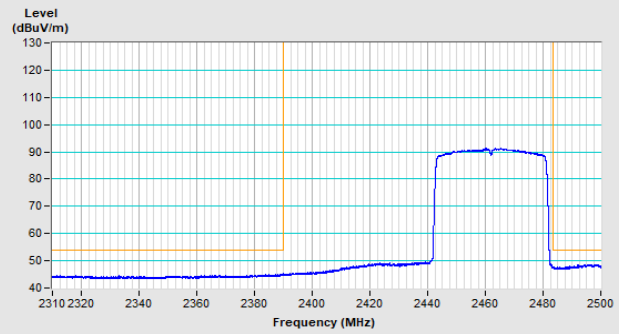

Horizontal (Average)

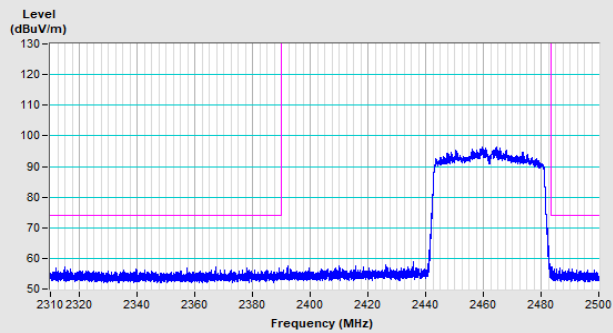


Vertical (Peak)

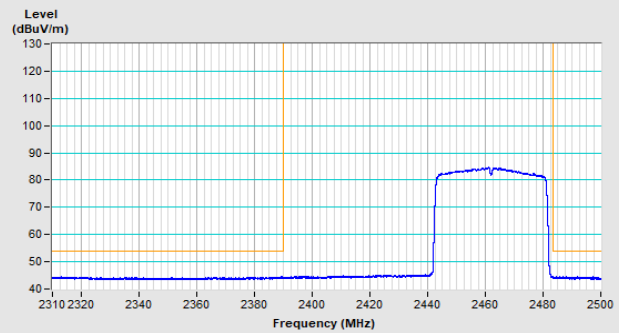


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

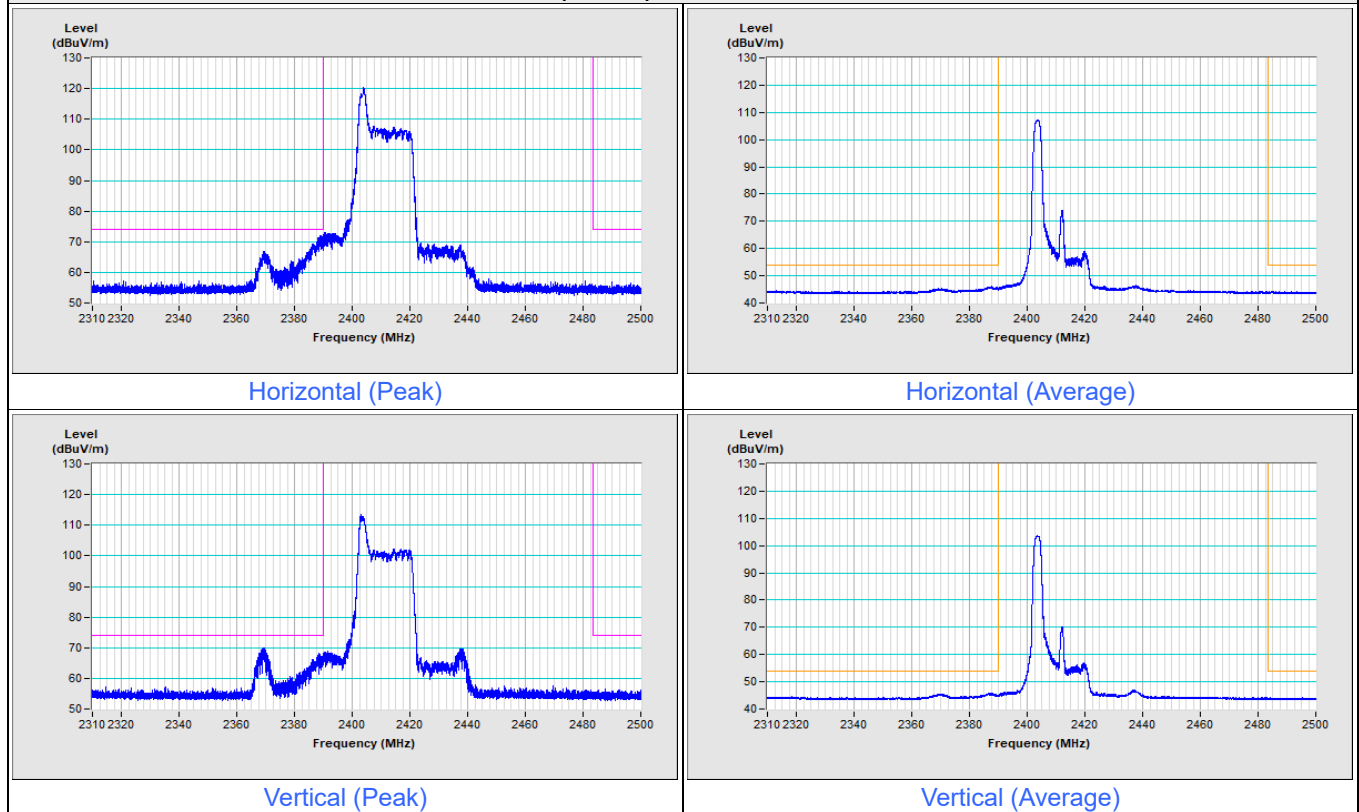


802.11be (EHT20) 26-tone RU Channel 2

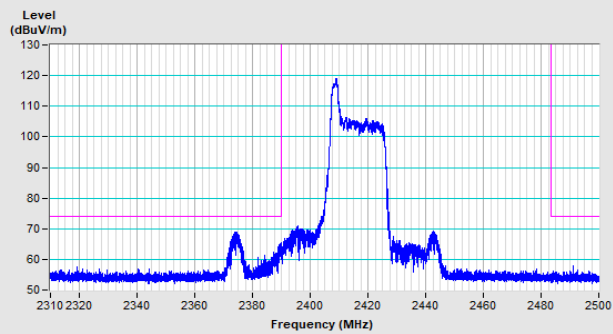


Horizontal (Peak)

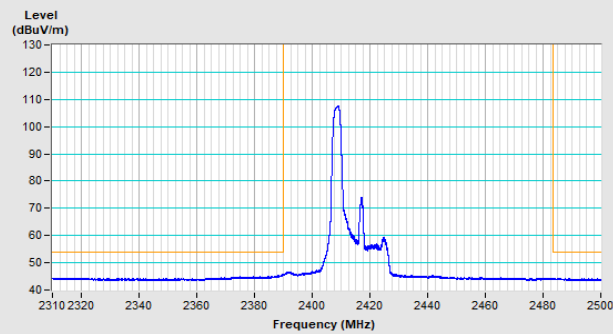

Horizontal (Average)

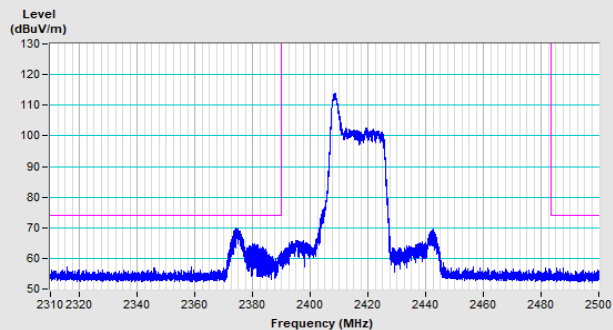


Vertical (Peak)

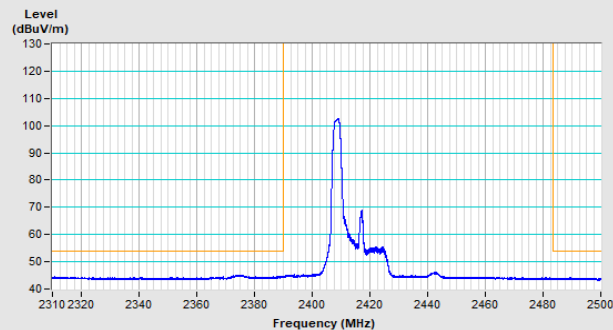


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 10

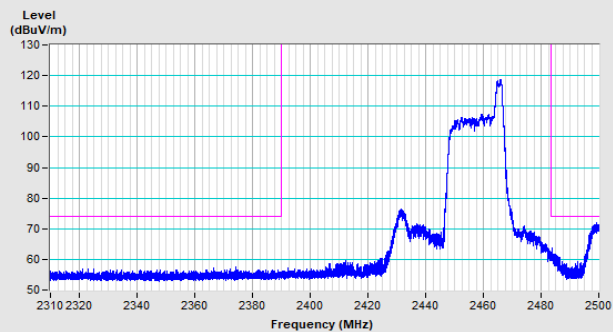


Horizontal (Peak)

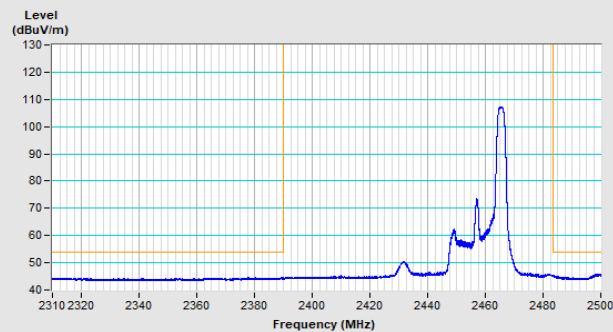

Horizontal (Average)

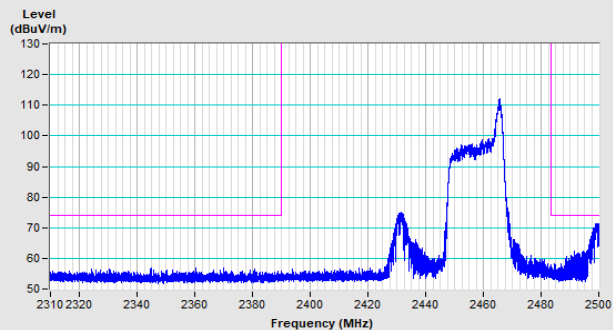


Vertical (Peak)

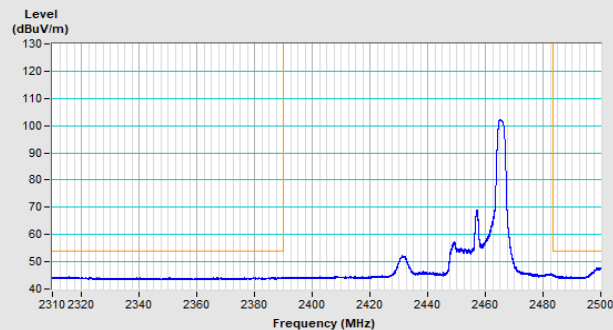


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 11

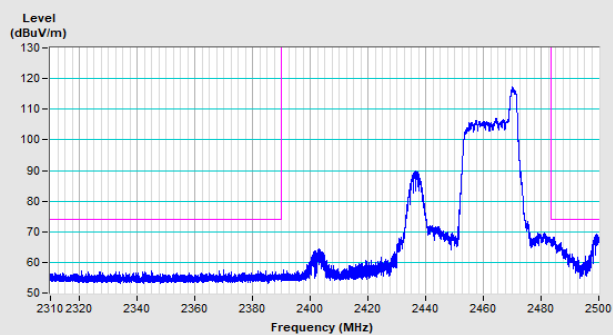


Horizontal (Peak)

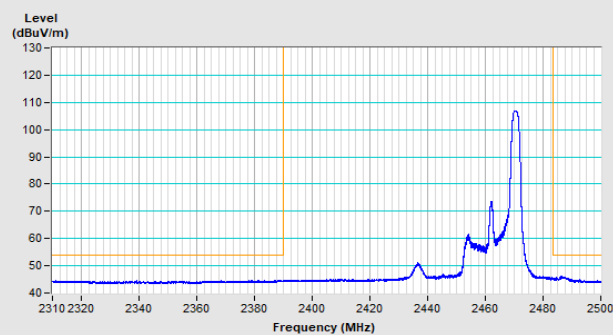

Horizontal (Average)

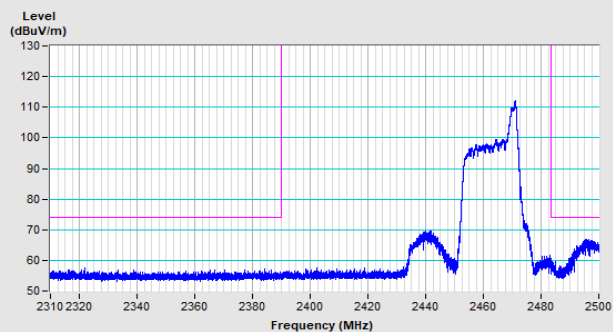


Vertical (Peak)

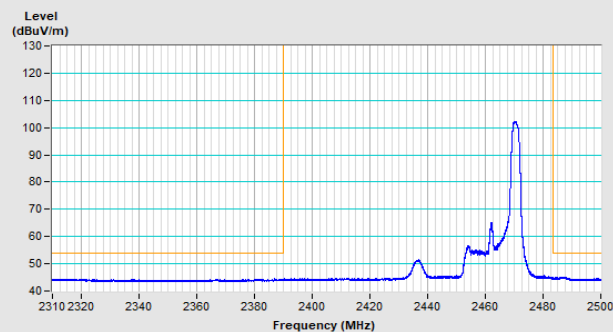


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

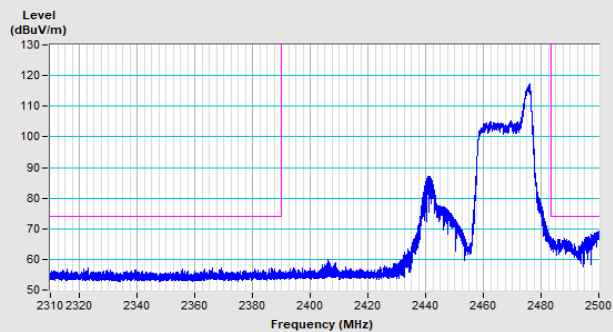


Horizontal (Peak)

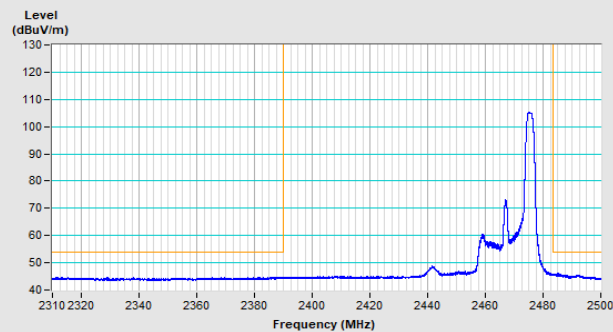

Horizontal (Average)

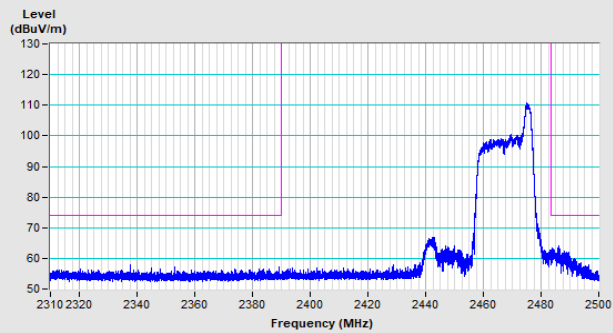


Vertical (Peak)

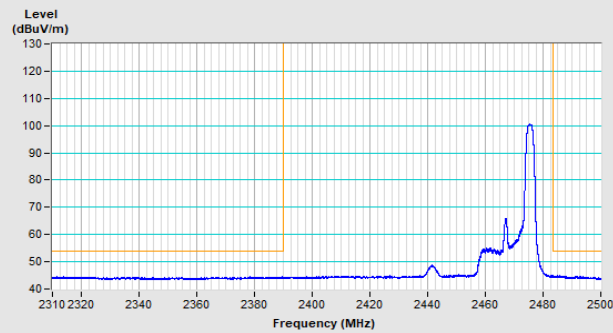


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

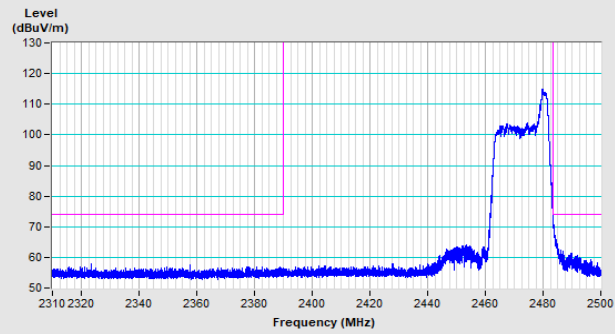


Horizontal (Peak)

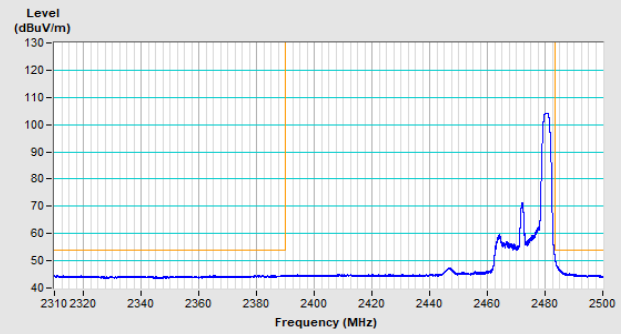

Horizontal (Average)

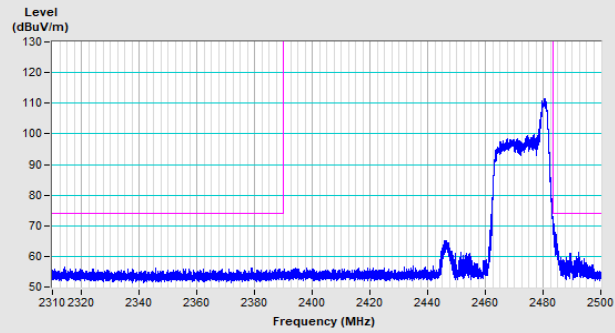


Vertical (Peak)

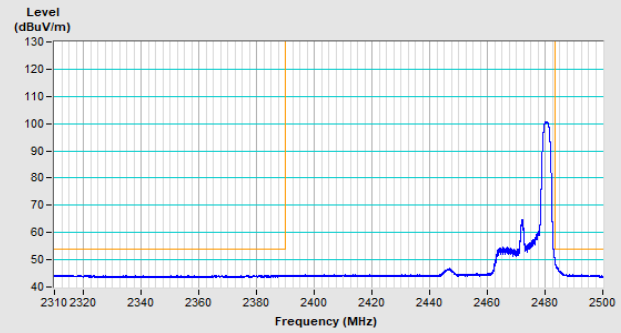


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

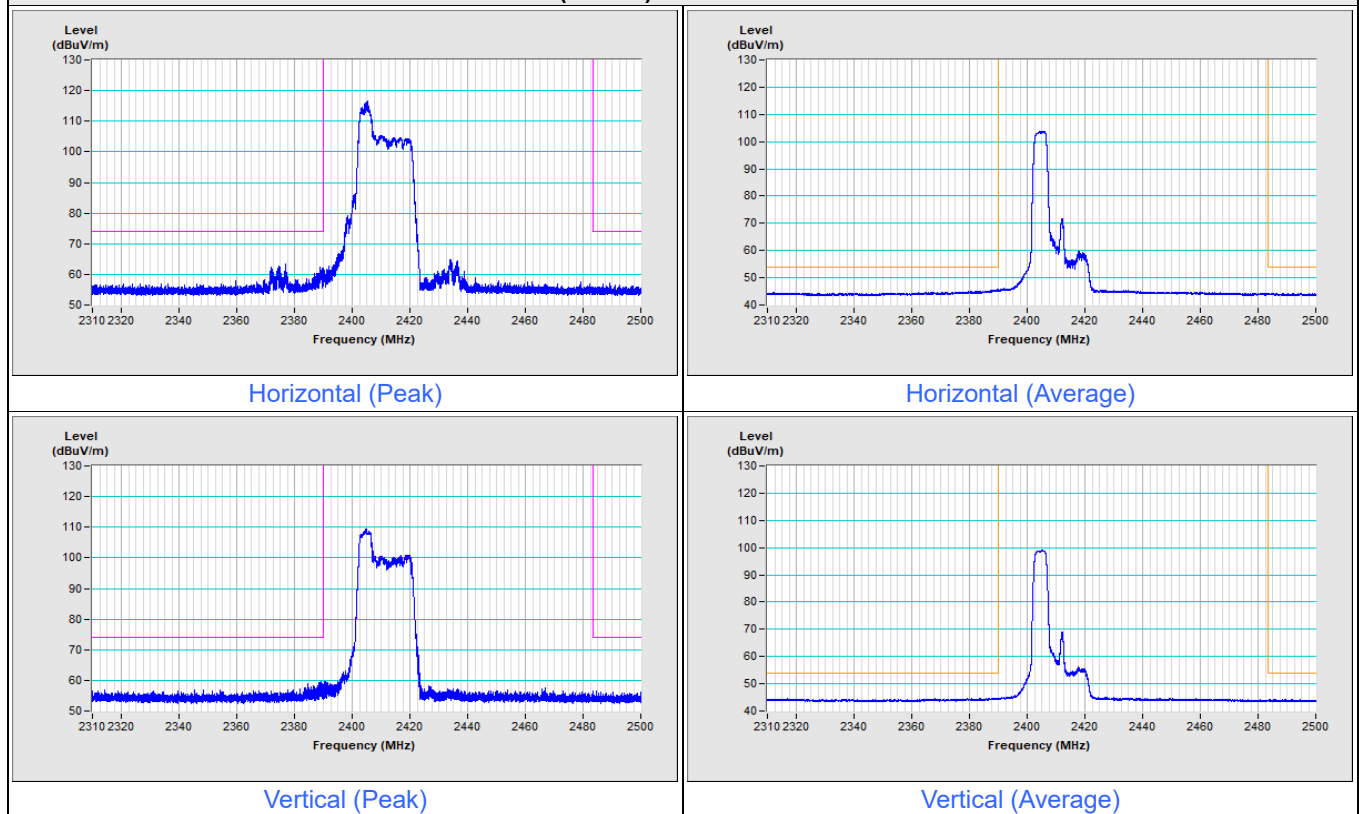


802.11be (EHT20) 52-tone RU Channel 2

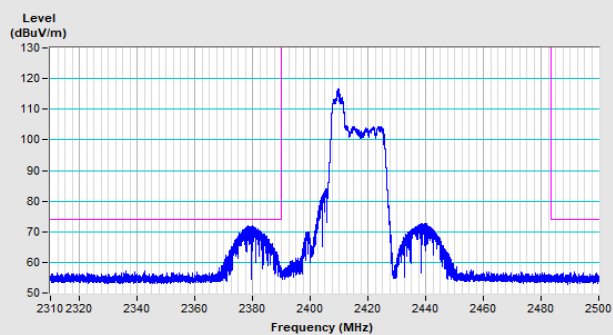


Horizontal (Peak)

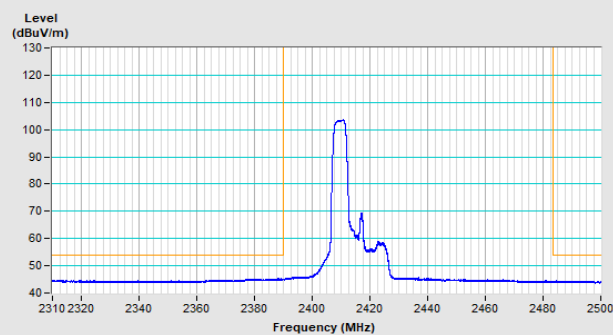

Horizontal (Average)

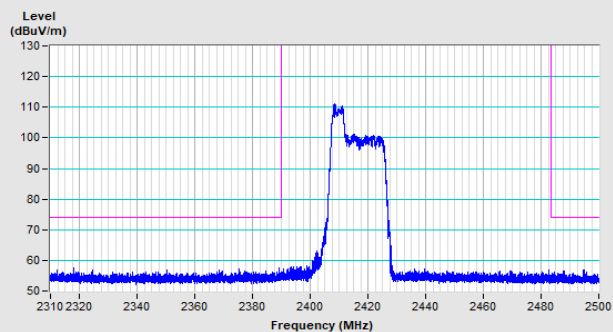


Vertical (Peak)

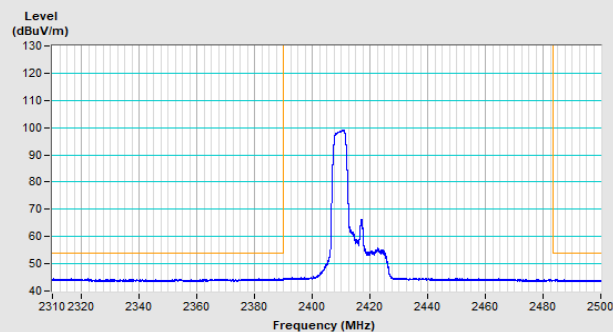


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 10

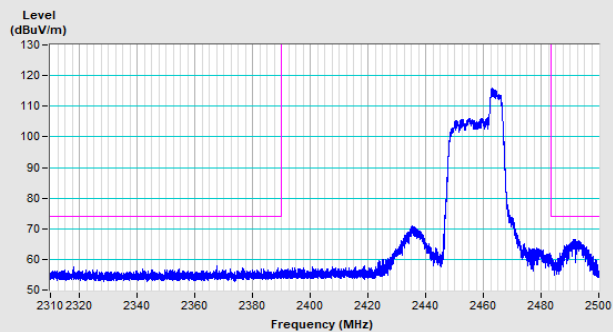


Horizontal (Peak)

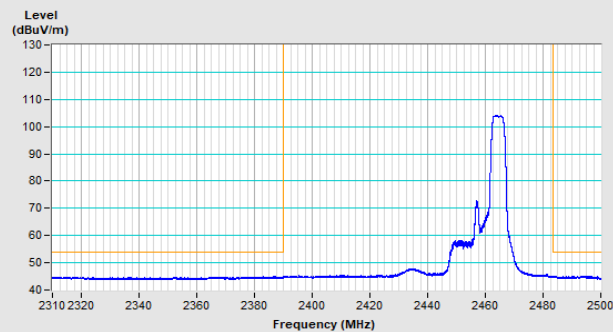

Horizontal (Average)

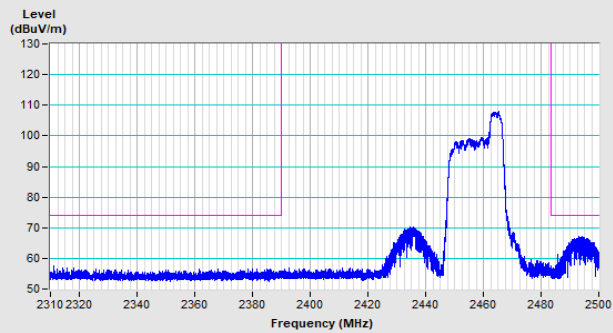


Vertical (Peak)

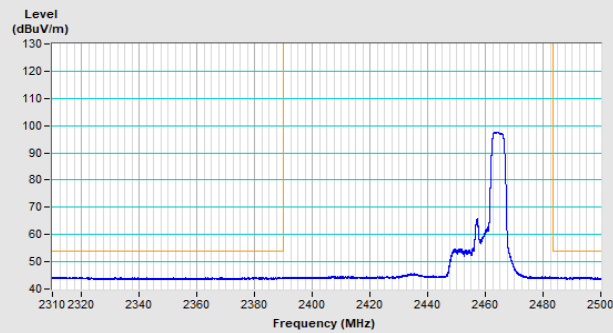


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 11

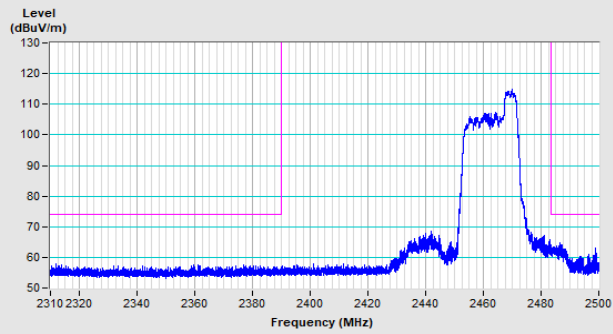


Horizontal (Peak)

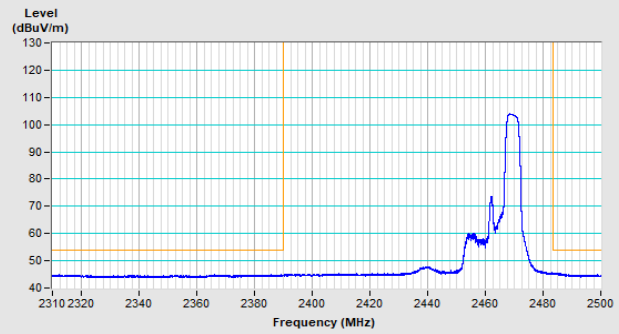

Horizontal (Average)

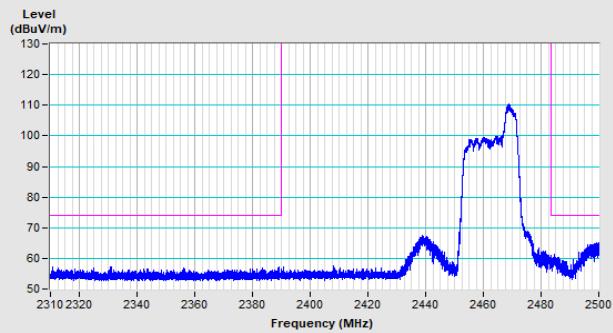


Vertical (Peak)

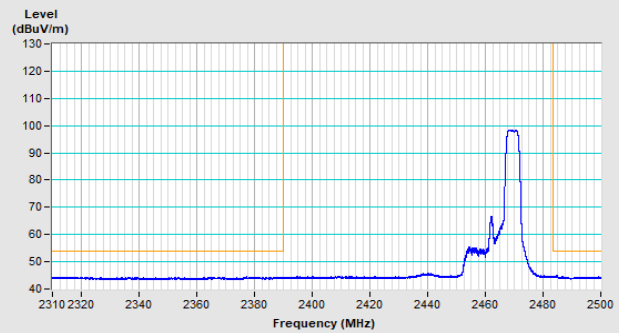


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

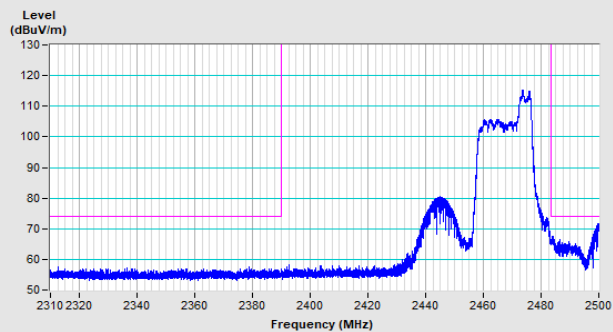


Horizontal (Peak)

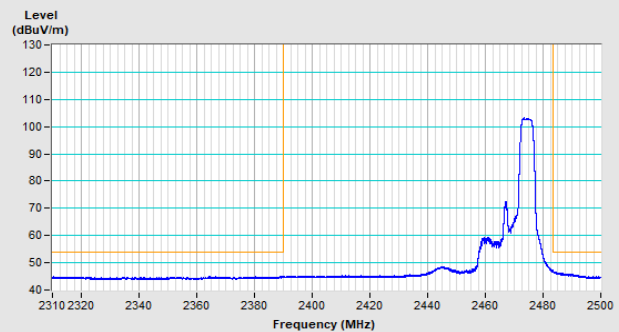

Horizontal (Average)

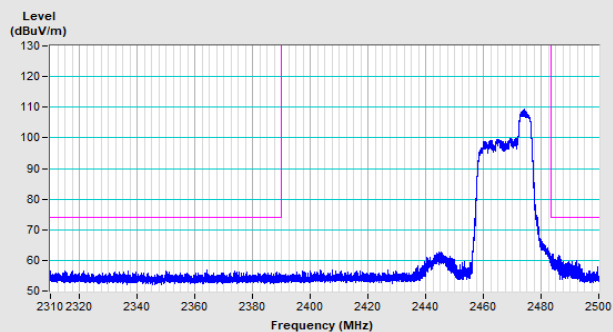


Vertical (Peak)

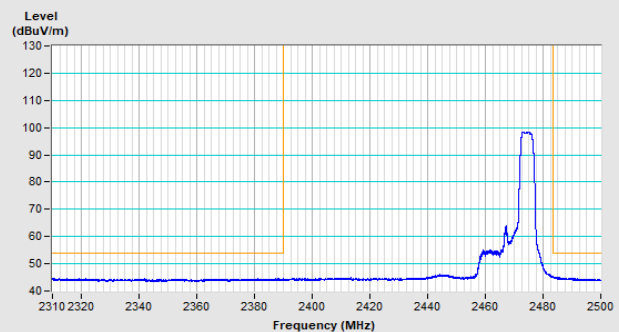


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

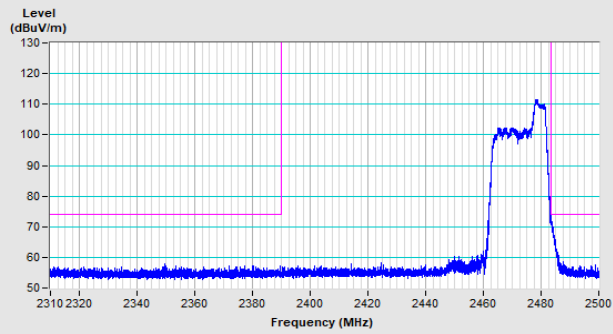


Horizontal (Peak)

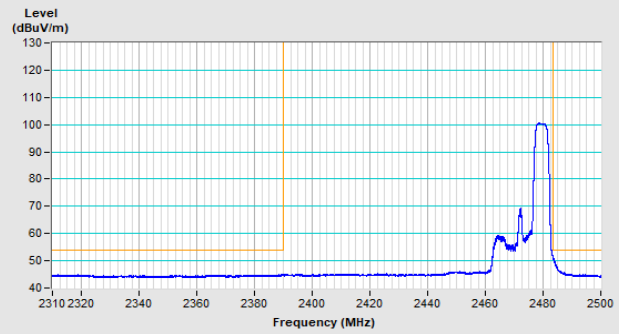

Horizontal (Average)

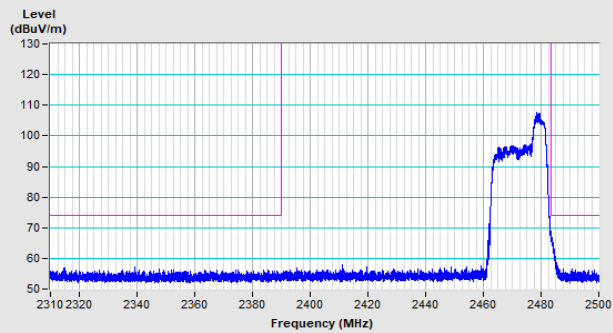


Vertical (Peak)

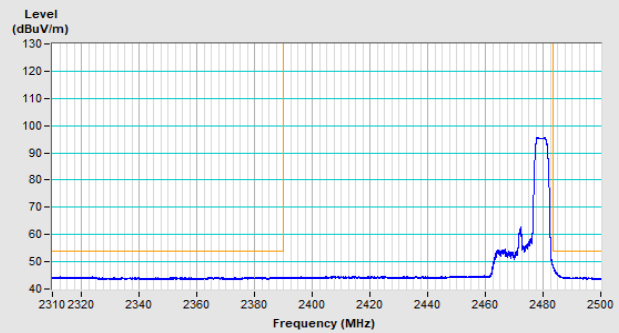


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

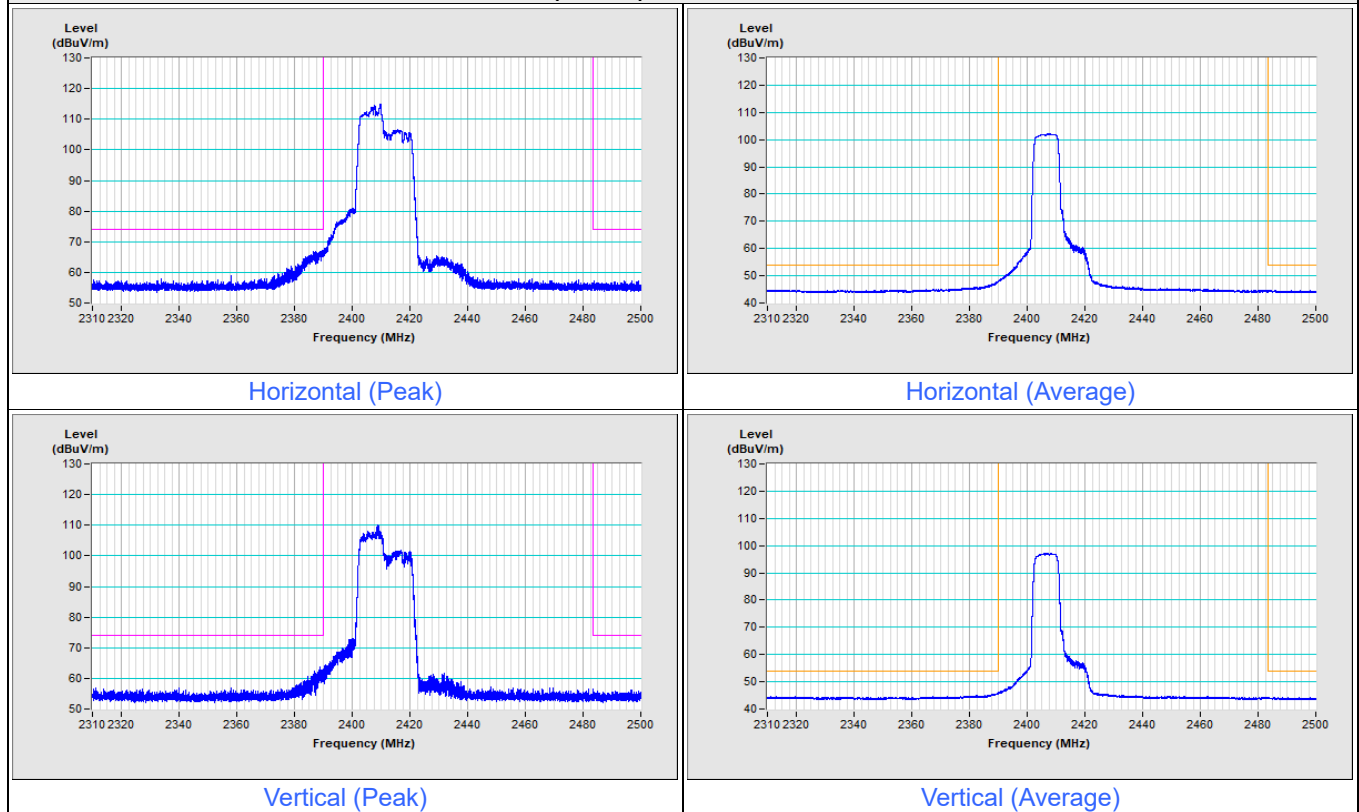


802.11be (EHT20) 106-tone RU Channel 2

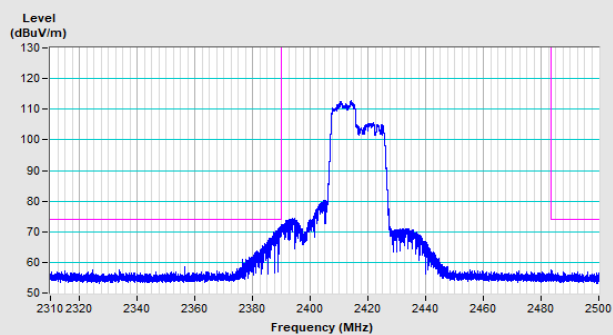


Horizontal (Peak)

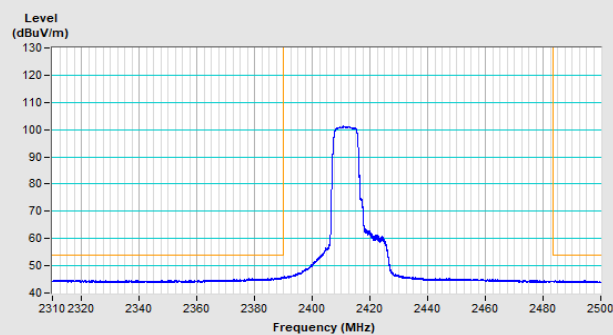

Horizontal (Average)

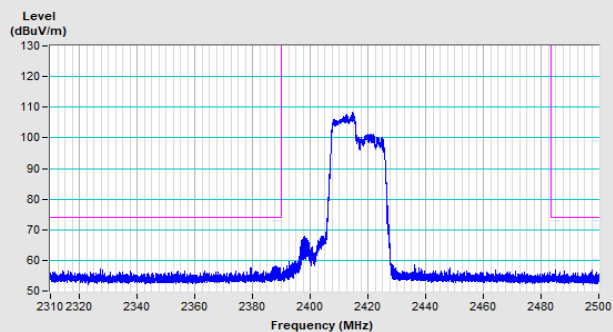


Vertical (Peak)

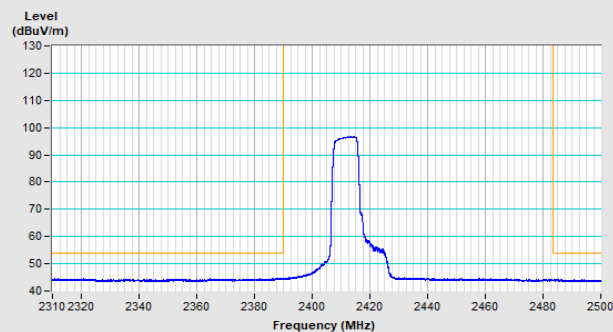


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 10

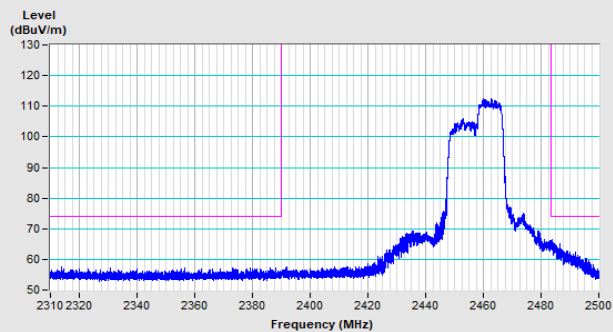


Horizontal (Peak)

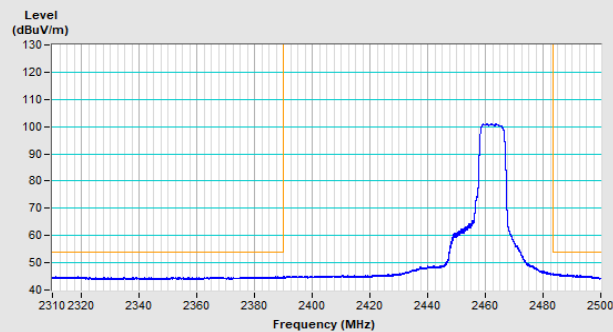

Horizontal (Average)

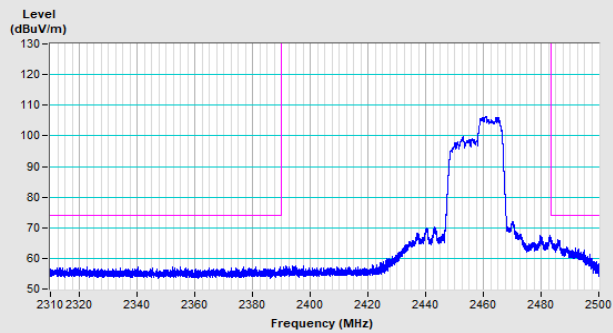


Vertical (Peak)

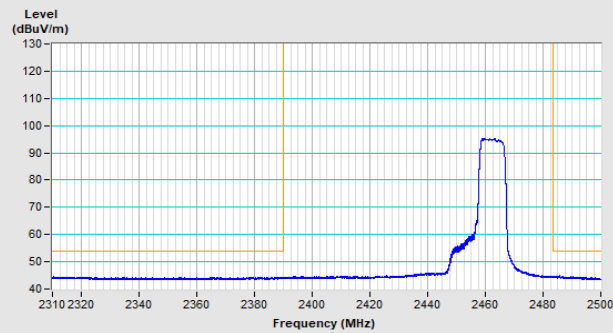


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 11

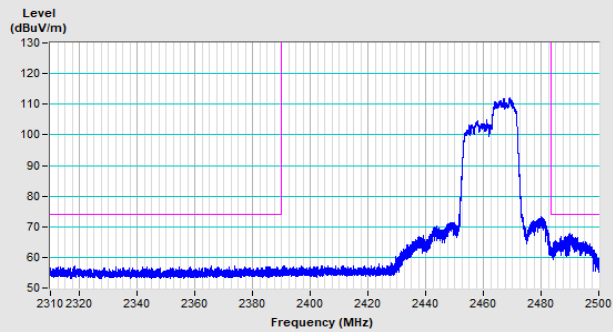


Horizontal (Peak)

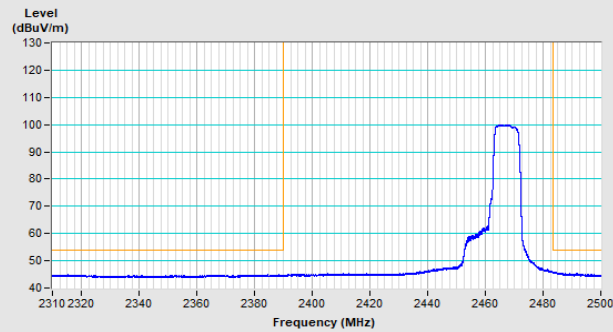

Horizontal (Average)

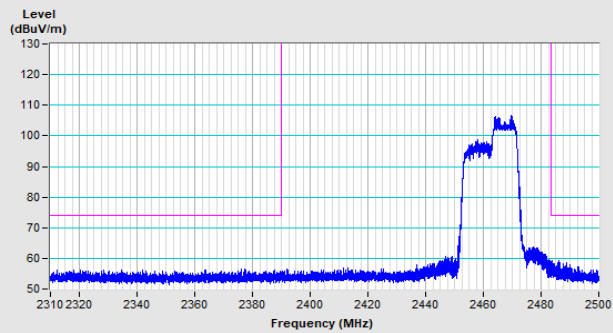


Vertical (Peak)

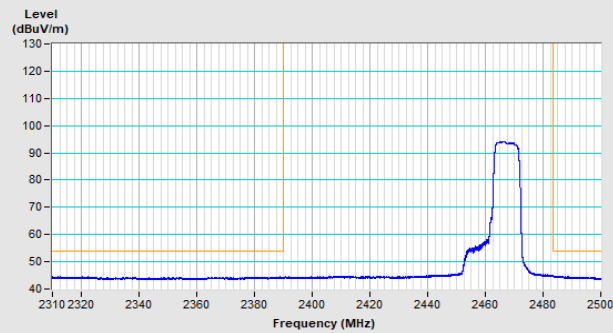


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

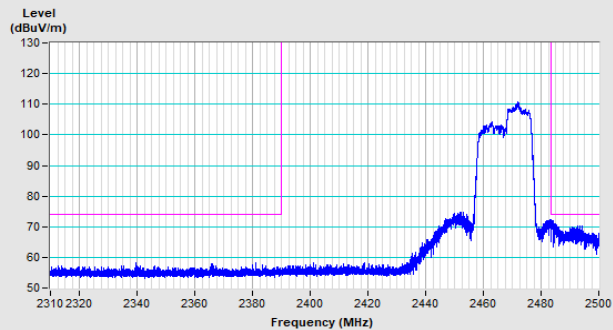


Horizontal (Peak)

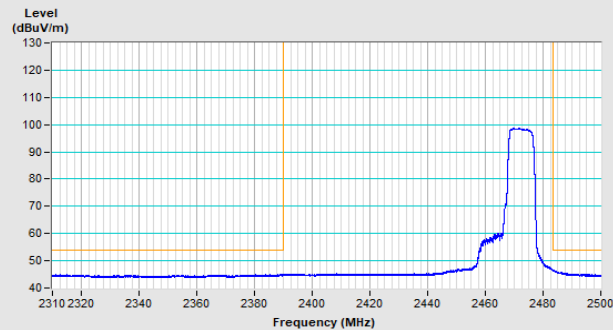

Horizontal (Average)

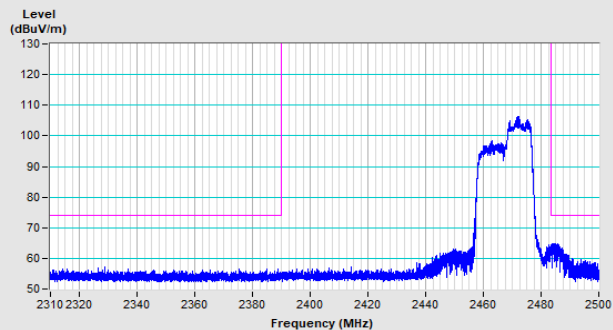


Vertical (Peak)

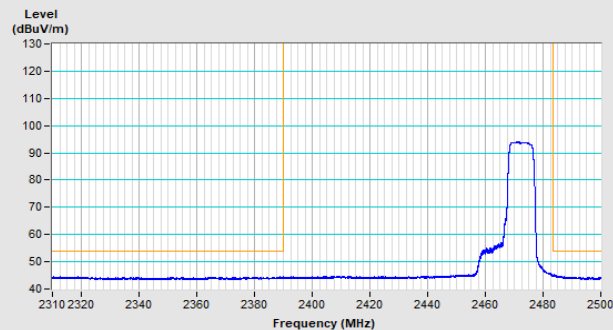


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

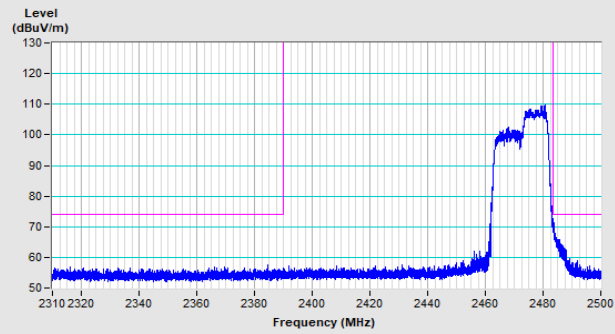


Horizontal (Peak)

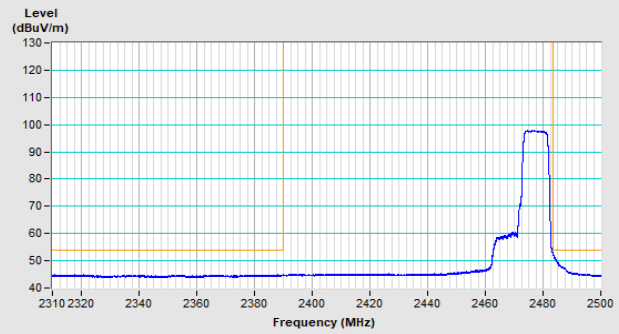

Horizontal (Average)

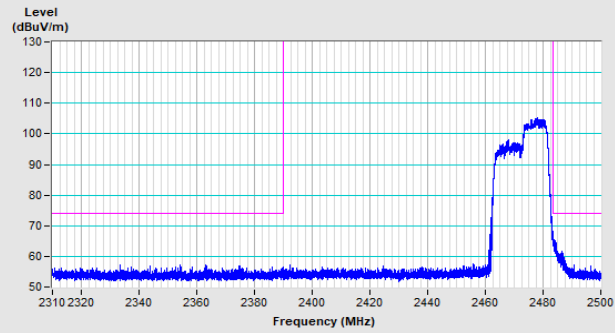


Vertical (Peak)

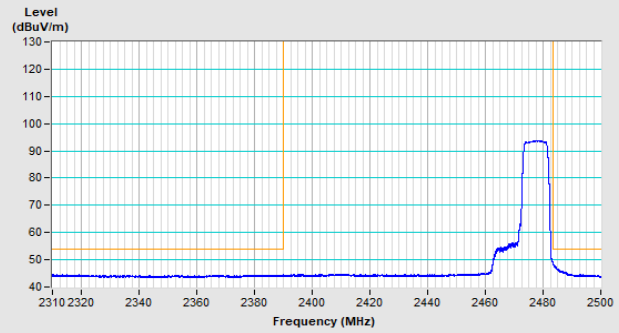


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

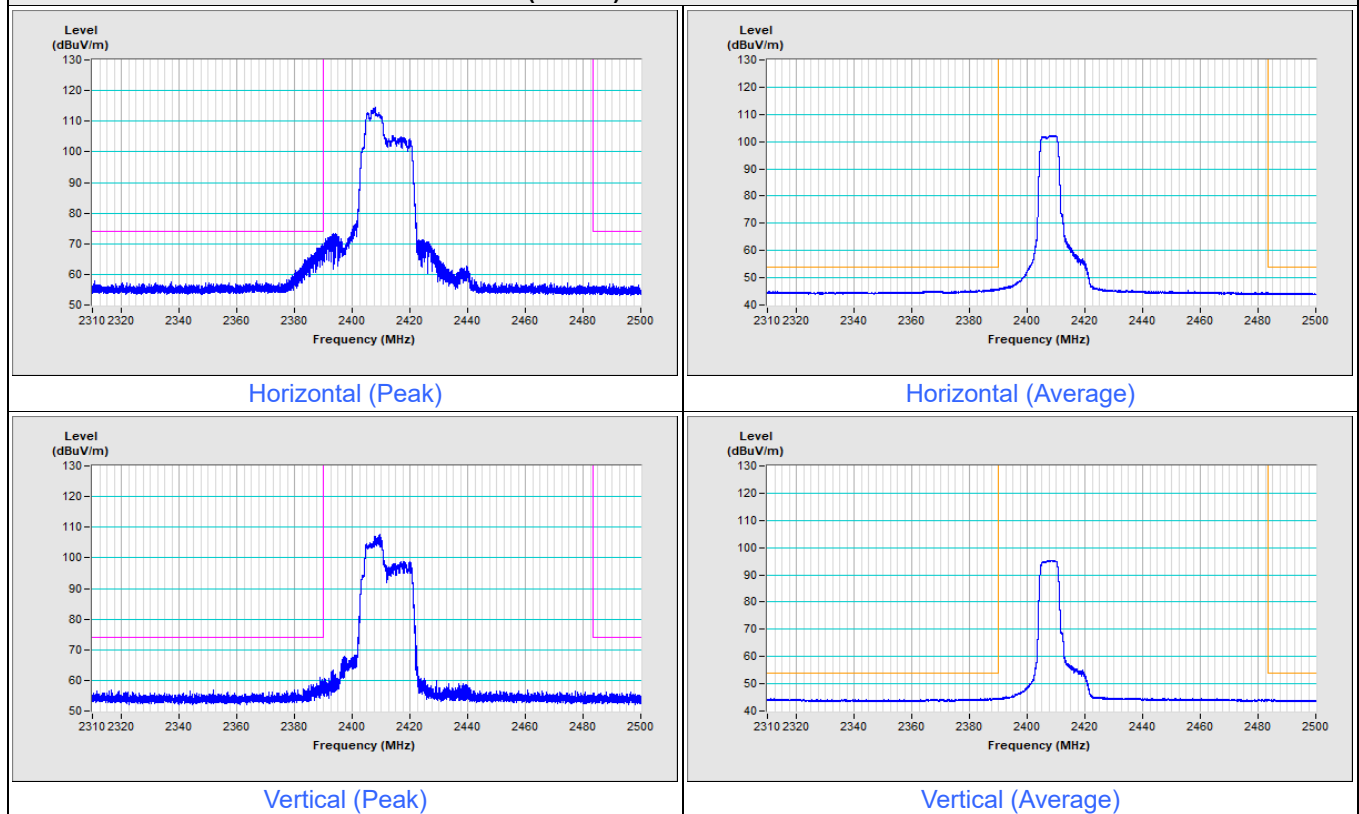


802.11be (EHT20) 52+26-tone MRU Channel 2

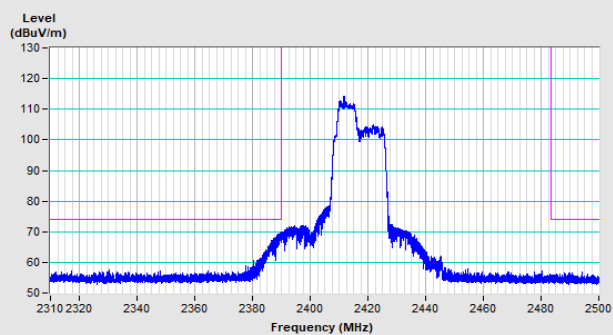


Horizontal (Peak)

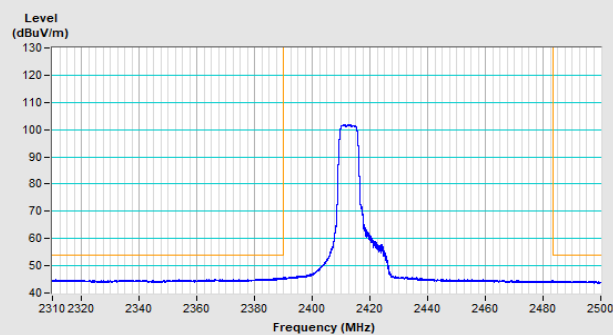

Horizontal (Average)

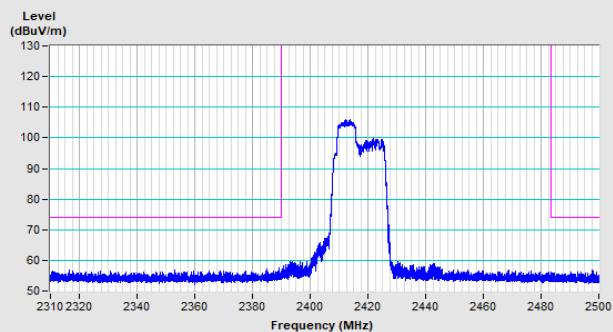


Vertical (Peak)

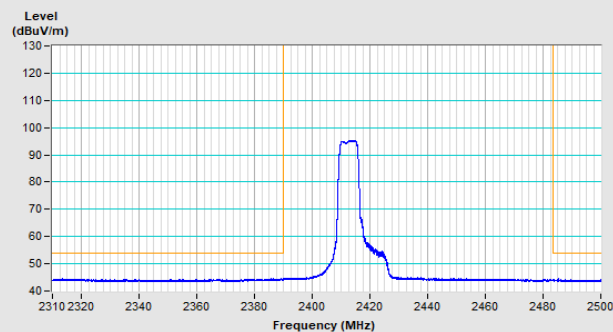


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 10

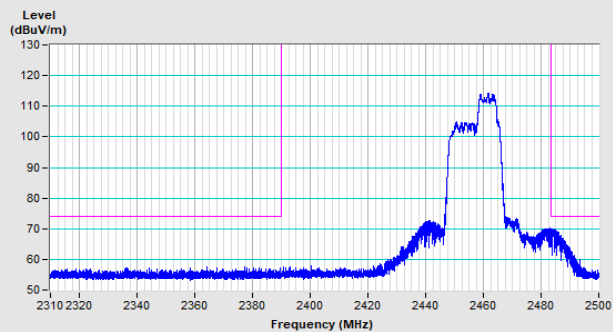


Horizontal (Peak)

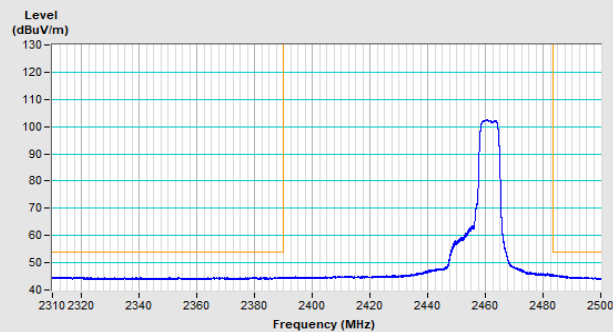

Horizontal (Average)

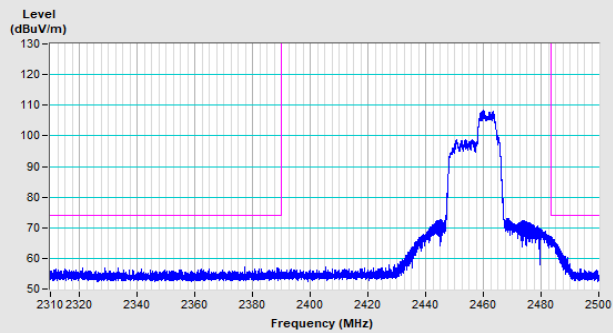


Vertical (Peak)

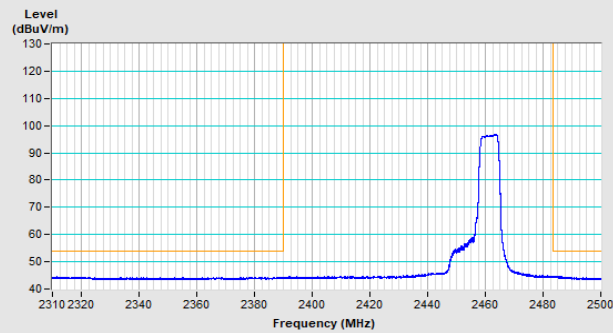


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 11

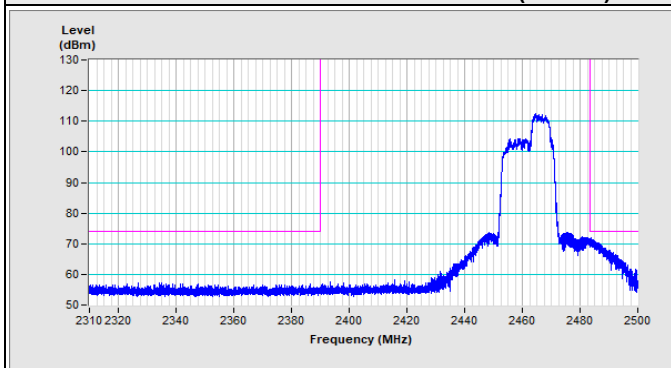


Horizontal (Peak)

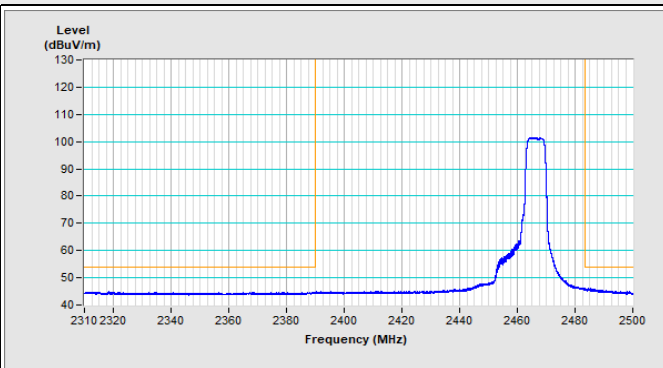

Horizontal (Average)

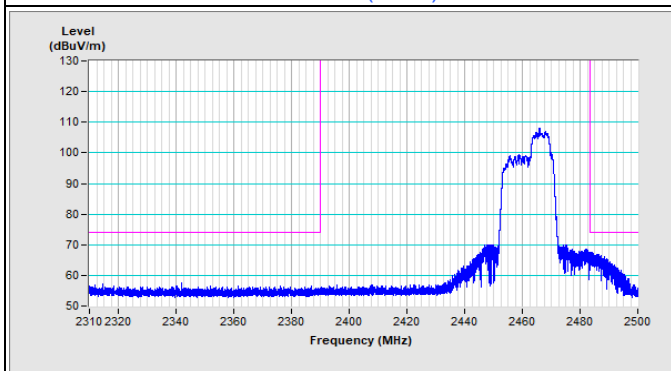


Vertical (Peak)

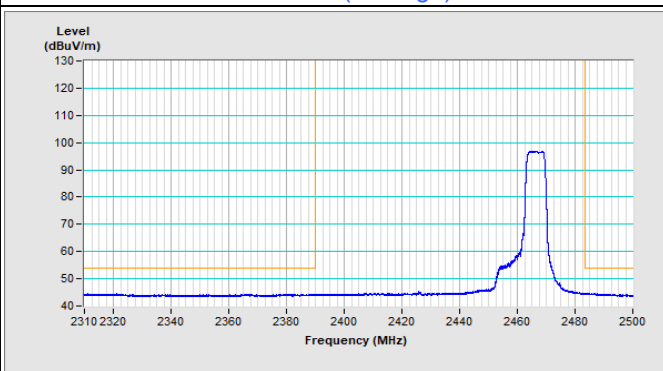


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 12

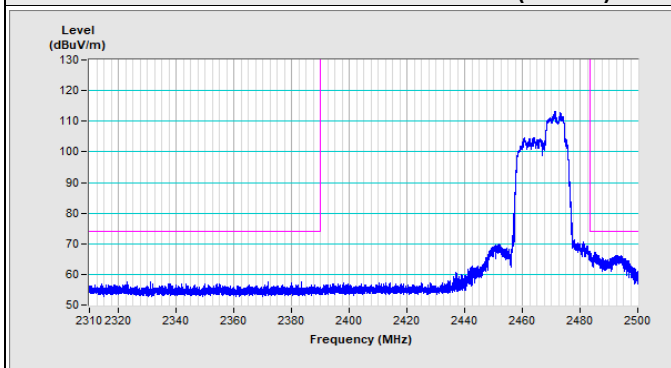


Horizontal (Peak)

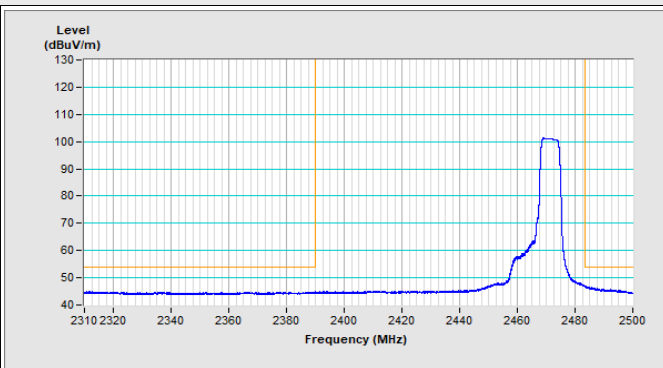

Horizontal (Average)

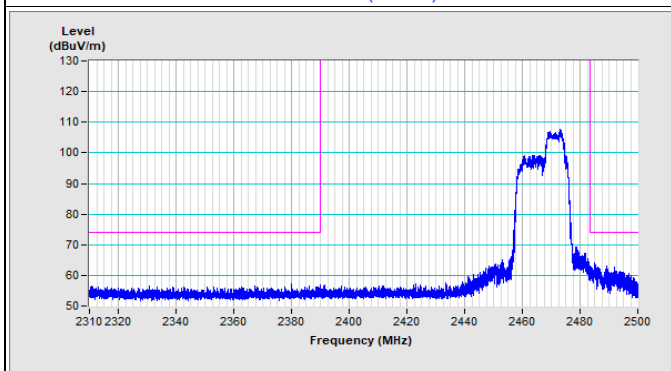


Vertical (Peak)

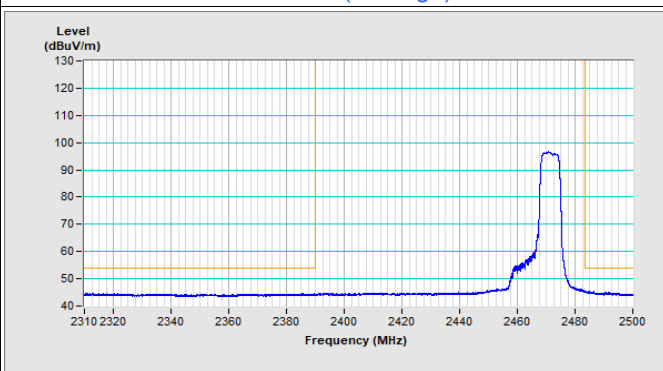


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 13

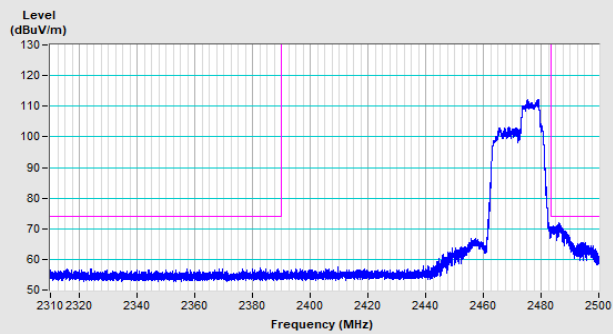


Horizontal (Peak)

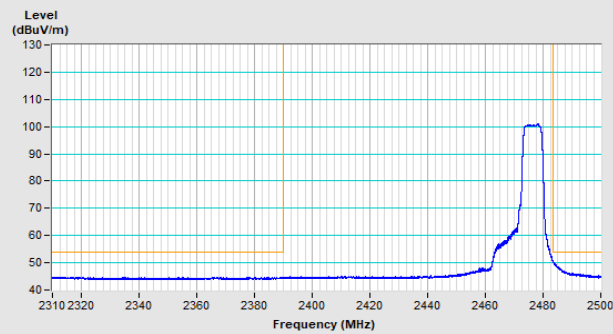

Horizontal (Average)

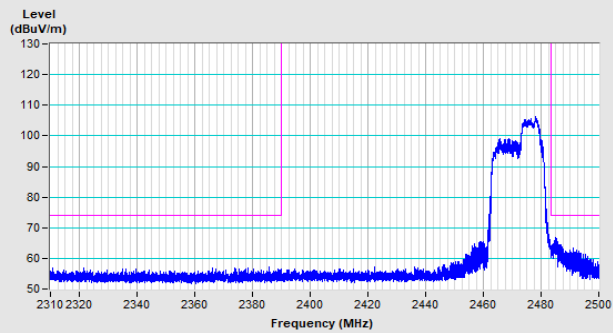


Vertical (Peak)

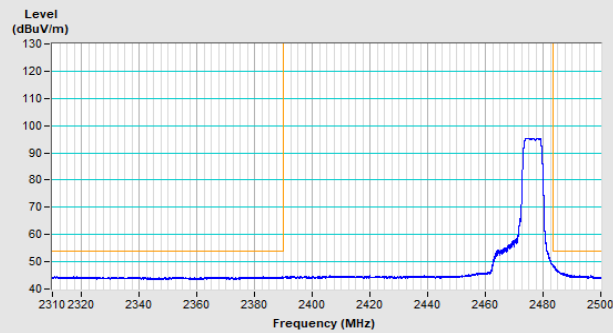


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

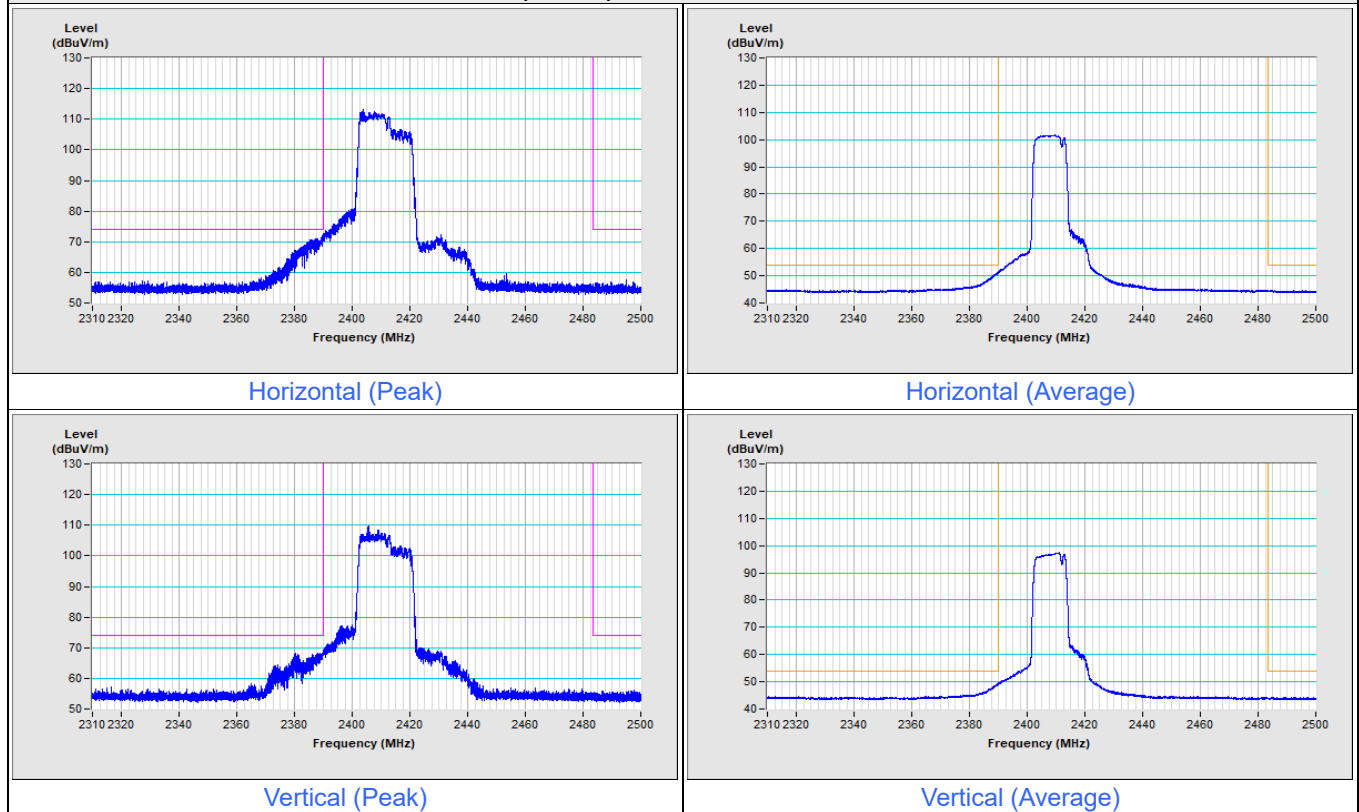


802.11be (EHT20) 106+26-tone MRU Channel 2

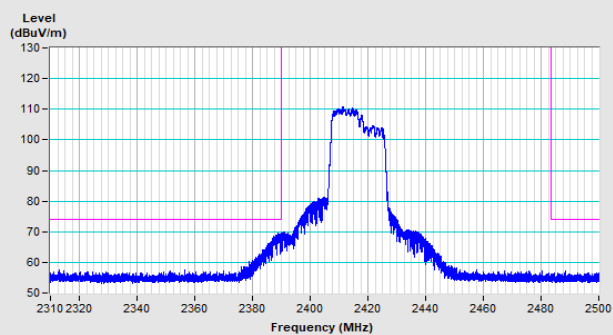


Horizontal (Peak)

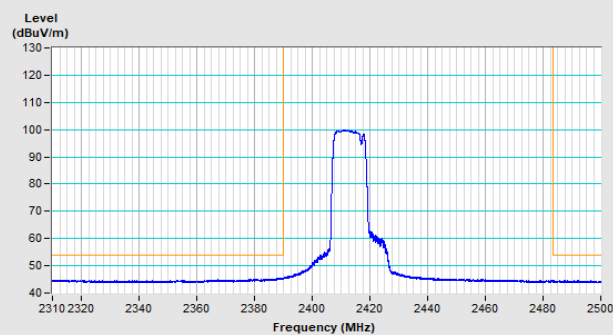

Horizontal (Average)

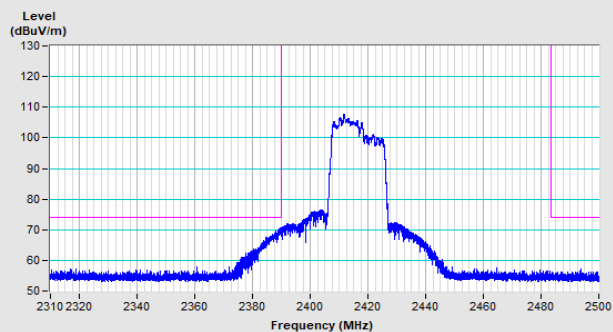


Vertical (Peak)

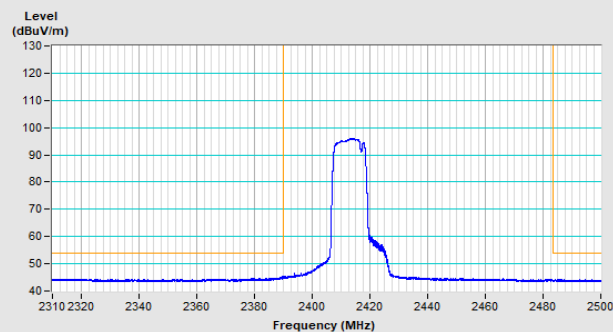


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 10

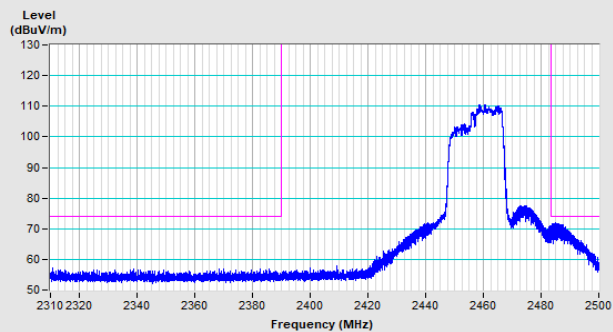


Horizontal (Peak)

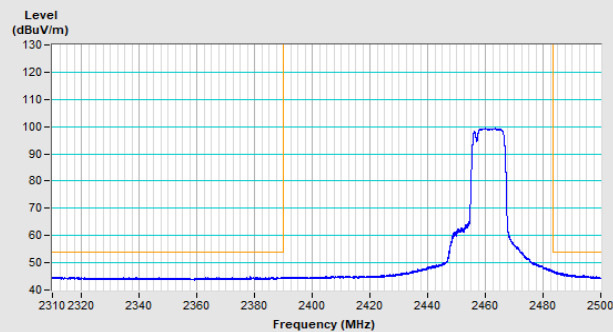

Horizontal (Average)

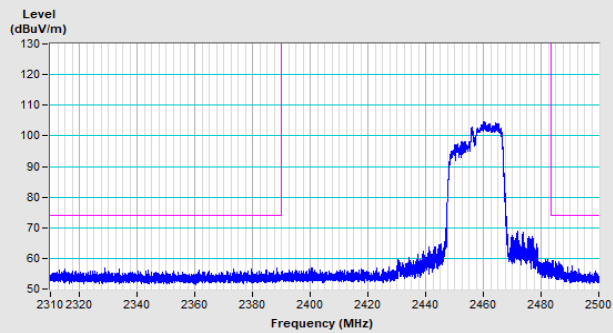


Vertical (Peak)

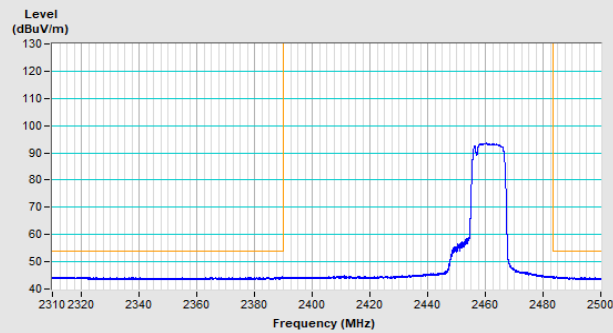


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 11

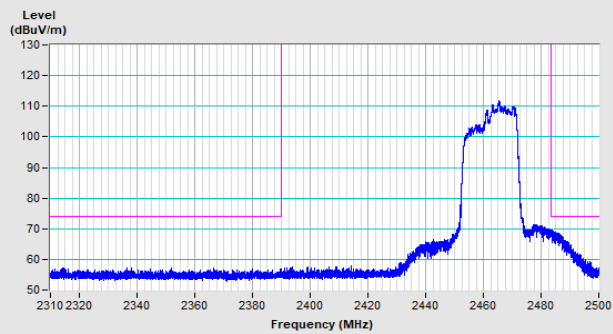


Horizontal (Peak)

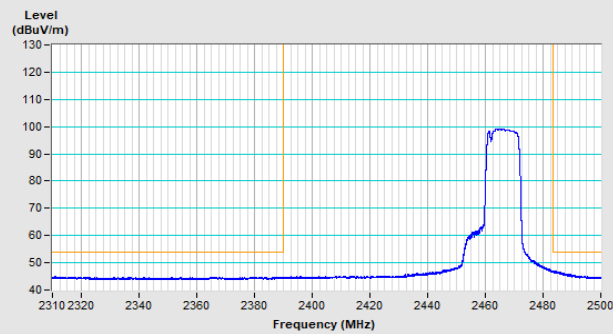

Horizontal (Average)

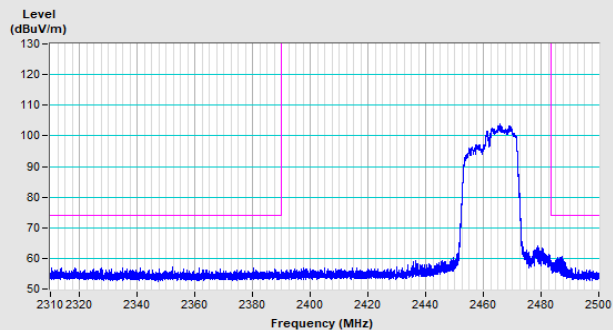


Vertical (Peak)

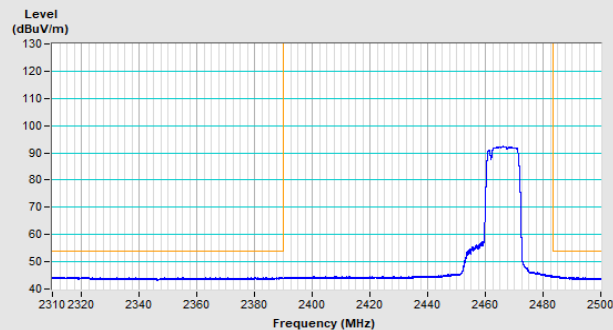


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 12

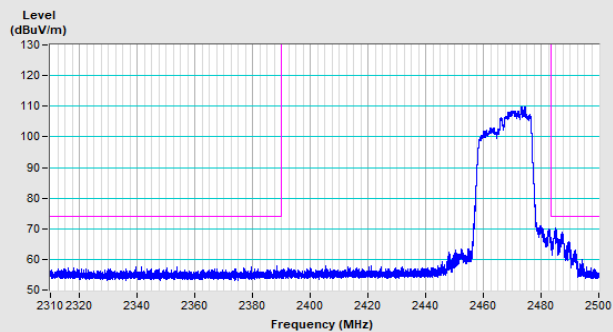


Horizontal (Peak)

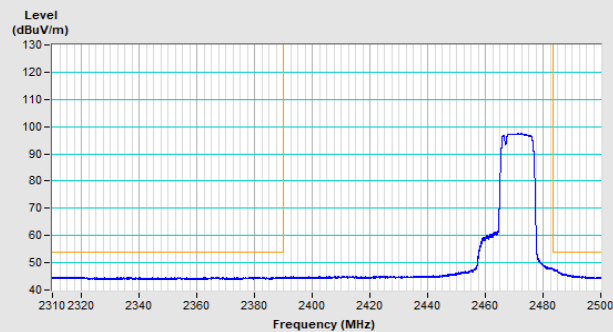

Horizontal (Average)

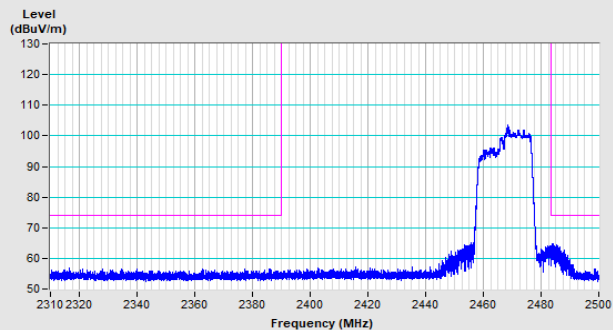


Vertical (Peak)

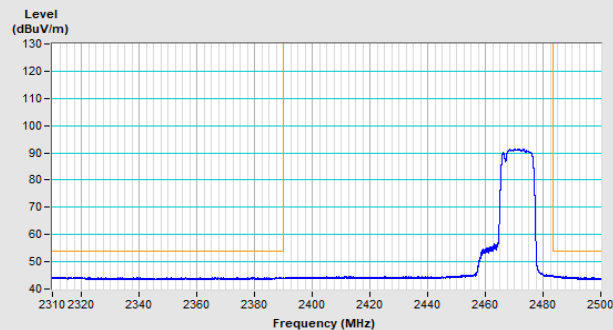


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 13

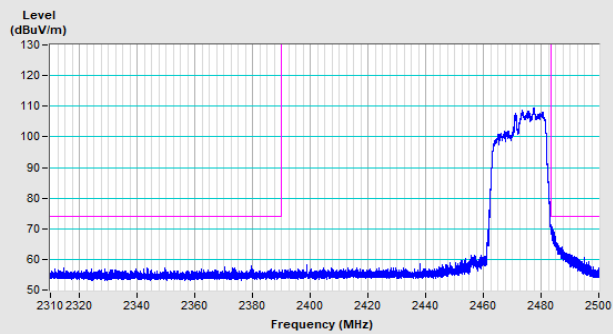


Horizontal (Peak)

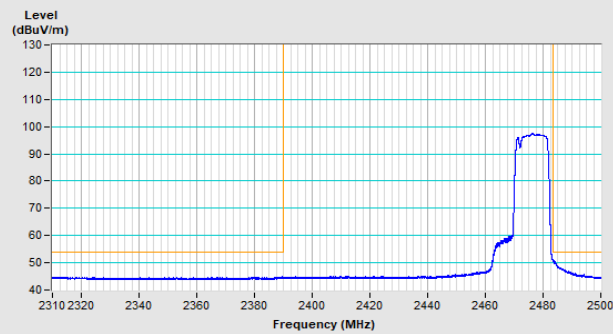

Horizontal (Average)

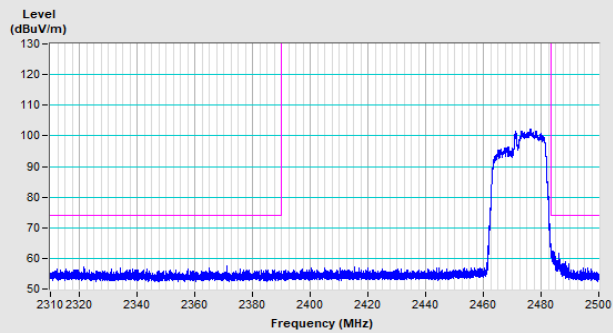

Vertical (Peak)

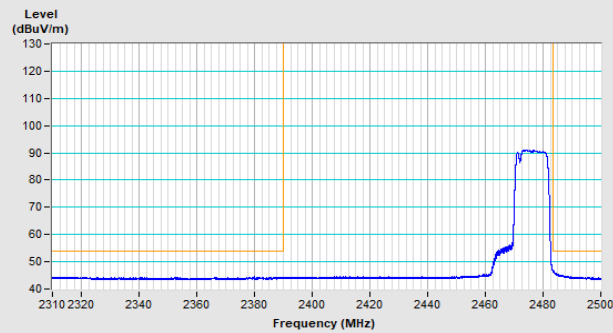

Vertical (Average)

Mode B

2Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	2.31 H	198	62.5	-2.0
2	2390.00	52.4 AV	54.0	-1.6	2.31 H	198	54.4	-2.0
3	*2412.00	111.4 PK			2.31 H	198	113.5	-2.1
4	*2412.00	109.2 AV			2.31 H	198	111.3	-2.1
5	4824.00	49.5 PK	74.0	-24.5	1.05 H	239	47.4	2.1
6	4824.00	48.6 AV	54.0	-5.4	1.05 H	239	46.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.01 V	169	60.5	-2.0
2	2390.00	52.0 AV	54.0	-2.0	1.01 V	169	54.0	-2.0
3	*2412.00	109.3 PK			1.01 V	169	111.4	-2.1
4	*2412.00	107.2 AV			1.01 V	169	109.3	-2.1
5	4824.00	47.3 PK	74.0	-26.7	1.60 V	123	45.2	2.1
6	4824.00	45.0 AV	54.0	-9.0	1.60 V	123	42.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	1.14 H	162	60.3	-2.0
2	2390.00	51.2 AV	54.0	-2.8	1.14 H	162	53.2	-2.0
3	*2417.00	110.9 PK			1.14 H	162	113.0	-2.1
4	*2417.00	108.0 AV			1.14 H	162	110.1	-2.1
5	4834.00	49.6 PK	74.0	-24.4	1.06 H	239	47.5	2.1
6	4834.00	48.5 AV	54.0	-5.5	1.06 H	239	46.4	2.1
7	7251.00	48.7 PK	74.0	-25.3	1.61 H	206	41.1	7.6
8	7251.00	42.7 AV	54.0	-11.3	1.61 H	206	35.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	3.69 V	152	60.1	-2.0
2	2390.00	50.5 AV	54.0	-3.5	3.69 V	152	52.5	-2.0
3	*2417.00	108.3 PK			3.69 V	152	110.4	-2.1
4	*2417.00	106.3 AV			3.69 V	152	108.4	-2.1
5	4834.00	47.3 PK	74.0	-26.7	1.57 V	120	45.2	2.1
6	4834.00	44.9 AV	54.0	-9.1	1.57 V	120	42.8	2.1
7	7251.00	46.2 PK	74.0	-27.8	1.75 V	122	38.6	7.6
8	7251.00	40.1 AV	54.0	-13.9	1.75 V	122	32.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.45 H	270	58.9	-2.0
2	2390.00	45.7 AV	54.0	-8.3	1.45 H	270	47.7	-2.0
3	*2437.00	111.8 PK			1.45 H	270	113.9	-2.1
4	*2437.00	109.6 AV			1.45 H	270	111.7	-2.1
5	2483.50	56.2 PK	74.0	-17.8	1.45 H	270	58.6	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.45 H	270	47.2	-2.4
7	4874.00	49.7 PK	74.0	-24.3	1.05 H	224	47.3	2.4
8	4874.00	48.8 AV	54.0	-5.2	1.05 H	224	46.4	2.4
9	7311.00	48.8 PK	74.0	-25.2	1.66 H	210	41.4	7.4
10	7311.00	42.8 AV	54.0	-11.2	1.66 H	210	35.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.7 PK	74.0	-17.3	3.78 V	140	58.7	-2.0
2	2390.00	45.3 AV	54.0	-8.7	3.78 V	140	47.3	-2.0
3	*2437.00	109.5 PK			3.78 V	140	111.6	-2.1
4	*2437.00	107.2 AV			3.78 V	140	109.3	-2.1
5	2483.50	55.7 PK	74.0	-18.3	3.78 V	140	58.1	-2.4
6	2483.50	43.6 AV	54.0	-10.4	3.78 V	140	46.0	-2.4
7	4874.00	47.4 PK	74.0	-26.6	1.53 V	135	45.0	2.4
8	4874.00	45.2 AV	54.0	-8.8	1.53 V	135	42.8	2.4
9	7311.00	46.7 PK	74.0	-27.3	1.71 V	110	39.3	7.4
10	7311.00	40.4 AV	54.0	-13.6	1.71 V	110	33.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	111.2 PK			1.09 H	267	113.6	-2.4
2	*2457.00	108.9 AV			1.09 H	267	111.3	-2.4
3	2483.50	58.6 PK	74.0	-15.4	1.09 H	267	61.0	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.09 H	267	54.8	-2.4
5	4914.00	50.2 PK	74.0	-23.8	1.01 H	232	47.7	2.5
6	4914.00	49.2 AV	54.0	-4.8	1.01 H	232	46.7	2.5
7	7371.00	48.7 PK	74.0	-25.3	1.70 H	210	41.1	7.6
8	7371.00	42.7 AV	54.0	-11.3	1.70 H	210	35.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.2 PK			1.98 V	107	110.6	-2.4
2	*2457.00	106.0 AV			1.98 V	107	108.4	-2.4
3	2483.50	59.5 PK	74.0	-14.5	1.98 V	107	61.9	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.98 V	107	54.4	-2.4
5	4914.00	47.6 PK	74.0	-26.4	1.57 V	125	45.1	2.5
6	4914.00	45.5 AV	54.0	-8.5	1.57 V	125	43.0	2.5
7	7371.00	47.3 PK	74.0	-26.7	1.67 V	115	39.7	7.6
8	7371.00	40.7 AV	54.0	-13.3	1.67 V	115	33.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.7 PK			1.02 H	299	113.1	-2.4
2	*2462.00	108.5 AV			1.02 H	299	110.9	-2.4
3	2483.50	60.1 PK	74.0	-13.9	1.02 H	299	62.5	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.02 H	299	54.2	-2.4
5	4924.00	50.2 PK	74.0	-23.8	1.00 H	234	47.7	2.5
6	4924.00	49.4 AV	54.0	-4.6	1.00 H	234	46.9	2.5
7	7386.00	49.0 PK	74.0	-25.0	1.71 H	195	41.3	7.7
8	7386.00	43.0 AV	54.0	-11.0	1.71 H	195	35.3	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.8 PK			3.05 V	22	110.2	-2.4
2	*2462.00	105.6 AV			3.05 V	22	108.0	-2.4
3	2483.50	59.1 PK	74.0	-14.9	3.05 V	22	61.5	-2.4
4	2483.50	50.7 AV	54.0	-3.3	3.05 V	22	53.1	-2.4
5	4924.00	46.9 PK	74.0	-27.1	1.53 V	136	44.4	2.5
6	4924.00	45.0 AV	54.0	-9.0	1.53 V	136	42.5	2.5
7	7386.00	47.0 PK	74.0	-27.0	1.66 V	110	39.3	7.7
8	7386.00	40.5 AV	54.0	-13.5	1.66 V	110	32.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			1.02 H	296	110.2	-2.4
2	*2467.00	106.0 AV			1.02 H	296	108.4	-2.4
3	2483.50	60.5 PK	74.0	-13.5	1.02 H	296	62.9	-2.4
4	2483.50	51.4 AV	54.0	-2.6	1.02 H	296	53.8	-2.4
5	4934.00	50.6 PK	74.0	-23.4	1.00 H	245	48.2	2.4
6	4934.00	49.6 AV	54.0	-4.4	1.00 H	245	47.2	2.4
7	7401.00	49.0 PK	74.0	-25.0	1.69 H	200	41.1	7.9
8	7401.00	43.3 AV	54.0	-10.7	1.69 H	200	35.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.5 PK			3.07 V	24	107.9	-2.4
2	*2467.00	103.3 AV			3.07 V	24	105.7	-2.4
3	2483.50	58.3 PK	74.0	-15.7	3.07 V	24	60.7	-2.4
4	2483.50	48.8 AV	54.0	-5.2	3.07 V	24	51.2	-2.4
5	4934.00	47.4 PK	74.0	-26.6	1.48 V	135	45.0	2.4
6	4934.00	45.3 AV	54.0	-8.7	1.48 V	135	42.9	2.4
7	7401.00	46.8 PK	74.0	-27.2	1.67 V	124	38.9	7.9
8	7401.00	40.5 AV	54.0	-13.5	1.67 V	124	32.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.5 PK			1.02 H	266	108.9	-2.4
2	*2472.00	103.2 AV			1.02 H	266	105.6	-2.4
3	2483.50	60.5 PK	74.0	-13.5	1.02 H	266	62.9	-2.4
4	2483.50	51.6 AV	54.0	-2.4	1.02 H	266	54.0	-2.4
5	4944.00	50.6 PK	74.0	-23.4	1.00 H	255	48.2	2.4
6	4944.00	49.7 AV	54.0	-4.3	1.00 H	255	47.3	2.4
7	7416.00	49.7 PK	74.0	-24.3	1.64 H	199	41.7	8.0
8	7416.00	43.8 AV	54.0	-10.2	1.64 H	199	35.8	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.7 PK			2.53 V	54	104.1	-2.4
2	*2472.00	99.5 AV			2.53 V	54	101.9	-2.4
3	2483.50	58.2 PK	74.0	-15.8	2.53 V	54	60.6	-2.4
4	2483.50	48.4 AV	54.0	-5.6	2.53 V	54	50.8	-2.4
5	4944.00	47.9 PK	74.0	-26.1	1.50 V	128	45.5	2.4
6	4944.00	45.8 AV	54.0	-8.2	1.50 V	128	43.4	2.4
7	7416.00	46.7 PK	74.0	-27.3	1.69 V	135	38.7	8.0
8	7416.00	40.5 AV	54.0	-13.5	1.69 V	135	32.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.20 H	298	71.7	-2.0
2	2390.00	52.2 AV	54.0	-1.8	1.20 H	298	54.2	-2.0
3	*2412.00	111.2 PK			1.20 H	298	113.3	-2.1
4	*2412.00	101.2 AV			1.20 H	298	103.3	-2.1
5	4824.00	45.5 PK	74.0	-28.5	1.06 H	280	43.4	2.1
6	4824.00	32.1 AV	54.0	-21.9	1.06 H	280	30.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.1 PK	74.0	-9.9	3.68 V	260	66.1	-2.0
2	2390.00	50.2 AV	54.0	-3.8	3.68 V	260	52.2	-2.0
3	*2412.00	104.5 PK			3.68 V	260	106.6	-2.1
4	*2412.00	95.9 AV			3.68 V	260	98.0	-2.1
5	4824.00	42.6 PK	74.0	-31.4	3.88 V	182	40.5	2.1
6	4824.00	29.4 AV	54.0	-24.6	3.88 V	182	27.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.3 PK	74.0	-2.7	1.23 H	296	73.3	-2.0
2	2390.00	51.7 AV	54.0	-2.3	1.23 H	296	53.7	-2.0
3	*2417.00	111.8 PK			1.23 H	296	113.9	-2.1
4	*2417.00	102.2 AV			1.23 H	296	104.3	-2.1
5	4834.00	45.8 PK	74.0	-28.2	1.08 H	277	43.7	2.1
6	4834.00	32.5 AV	54.0	-21.5	1.08 H	277	30.4	2.1
7	7251.00	41.6 PK	74.0	-32.4	1.48 H	183	34.0	7.6
8	7251.00	31.5 AV	54.0	-22.5	1.48 H	183	23.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	1.83 V	107	65.8	-2.0
2	2390.00	47.9 AV	54.0	-6.1	1.83 V	107	49.9	-2.0
3	*2417.00	104.5 PK			1.83 V	107	106.6	-2.1
4	*2417.00	96.0 AV			1.83 V	107	98.1	-2.1
5	4834.00	42.5 PK	74.0	-31.5	3.88 V	193	40.4	2.1
6	4834.00	29.6 AV	54.0	-24.4	3.88 V	193	27.5	2.1
7	7251.00	40.8 PK	74.0	-33.2	2.25 V	171	33.2	7.6
8	7251.00	30.6 AV	54.0	-23.4	2.25 V	171	23.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.65 H	199	65.3	-2.0
2	2390.00	47.6 AV	54.0	-6.4	1.65 H	199	49.6	-2.0
3	*2437.00	115.5 PK			1.65 H	199	117.6	-2.1
4	*2437.00	106.2 AV			1.65 H	199	108.3	-2.1
5	2483.50	59.9 PK	74.0	-14.1	1.65 H	199	62.3	-2.4
6	2483.50	45.2 AV	54.0	-8.8	1.65 H	199	47.6	-2.4
7	4874.00	45.7 PK	74.0	-28.3	1.12 H	271	43.3	2.4
8	4874.00	32.3 AV	54.0	-21.7	1.12 H	271	29.9	2.4
9	7311.00	41.5 PK	74.0	-32.5	1.44 H	188	34.1	7.4
10	7311.00	31.3 AV	54.0	-22.7	1.44 H	188	23.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.47 V	111	60.2	-2.0
2	2390.00	44.8 AV	54.0	-9.2	1.47 V	111	46.8	-2.0
3	*2437.00	108.4 PK			1.47 V	111	110.5	-2.1
4	*2437.00	100.3 AV			1.47 V	111	102.4	-2.1
5	2483.50	57.9 PK	74.0	-16.1	1.47 V	111	60.3	-2.4
6	2483.50	43.6 AV	54.0	-10.4	1.47 V	111	46.0	-2.4
7	4874.00	43.1 PK	74.0	-30.9	3.88 V	178	40.7	2.4
8	4874.00	30.1 AV	54.0	-23.9	3.88 V	178	27.7	2.4
9	7311.00	40.6 PK	74.0	-33.4	2.30 V	157	33.2	7.4
10	7311.00	30.5 AV	54.0	-23.5	2.30 V	157	23.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	110.2 PK			1.30 H	271	112.6	-2.4
2	*2457.00	101.2 AV			1.30 H	271	103.6	-2.4
3	2483.50	68.2 PK	74.0	-5.8	1.30 H	271	70.6	-2.4
4	2483.50	51.6 AV	54.0	-2.4	1.30 H	271	54.0	-2.4
5	4914.00	45.1 PK	74.0	-28.9	1.13 H	271	42.6	2.5
6	4914.00	32.0 AV	54.0	-22.0	1.13 H	271	29.5	2.5
7	7371.00	41.6 PK	74.0	-32.4	1.40 H	179	34.0	7.6
8	7371.00	31.3 AV	54.0	-22.7	1.40 H	179	23.7	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	105.0 PK			3.97 V	150	107.4	-2.4
2	*2457.00	96.0 AV			3.97 V	150	98.4	-2.4
3	2483.50	61.9 PK	74.0	-12.1	3.97 V	150	64.3	-2.4
4	2483.50	48.0 AV	54.0	-6.0	3.97 V	150	50.4	-2.4
5	4914.00	43.1 PK	74.0	-30.9	3.88 V	165	40.6	2.5
6	4914.00	29.9 AV	54.0	-24.1	3.88 V	165	27.4	2.5
7	7371.00	40.8 PK	74.0	-33.2	2.35 V	166	33.2	7.6
8	7371.00	30.8 AV	54.0	-23.2	2.35 V	166	23.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.5 PK			1.11 H	268	111.9	-2.4
2	*2462.00	100.4 AV			1.11 H	268	102.8	-2.4
3	2483.50	68.2 PK	74.0	-5.8	1.11 H	268	70.6	-2.4
4	2483.50	51.5 AV	54.0	-2.5	1.11 H	268	53.9	-2.4
5	4924.00	45.5 PK	74.0	-28.5	1.09 H	278	43.0	2.5
6	4924.00	32.2 AV	54.0	-21.8	1.09 H	278	29.7	2.5
7	7386.00	41.7 PK	74.0	-32.3	1.37 H	184	34.0	7.7
8	7386.00	31.7 AV	54.0	-22.3	1.37 H	184	24.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.5 PK			3.94 V	148	106.9	-2.4
2	*2462.00	95.5 AV			3.94 V	148	97.9	-2.4
3	2483.50	60.4 PK	74.0	-13.6	3.94 V	148	62.8	-2.4
4	2483.50	47.8 AV	54.0	-6.2	3.94 V	148	50.2	-2.4
5	4924.00	43.2 PK	74.0	-30.8	3.89 V	175	40.7	2.5
6	4924.00	29.8 AV	54.0	-24.2	3.89 V	175	27.3	2.5
7	7386.00	40.2 PK	74.0	-33.8	2.31 V	155	32.5	7.7
8	7386.00	30.4 AV	54.0	-23.6	2.31 V	155	22.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.3 PK			1.25 H	304	110.7	-2.4
2	*2467.00	99.3 AV			1.25 H	304	101.7	-2.4
3	2483.50	65.9 PK	74.0	-8.1	1.25 H	304	68.3	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.25 H	304	54.2	-2.4
5	4934.00	45.7 PK	74.0	-28.3	1.09 H	280	43.3	2.4
6	4934.00	32.1 AV	54.0	-21.9	1.09 H	280	29.7	2.4
7	7401.00	41.2 PK	74.0	-32.8	1.38 H	188	33.3	7.9
8	7401.00	31.4 AV	54.0	-22.6	1.38 H	188	23.5	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.4 PK			1.60 V	78	105.8	-2.4
2	*2467.00	94.9 AV			1.60 V	78	97.3	-2.4
3	2483.50	58.9 PK	74.0	-15.1	1.60 V	78	61.3	-2.4
4	2483.50	46.7 AV	54.0	-7.3	1.60 V	78	49.1	-2.4
5	4934.00	42.8 PK	74.0	-31.2	3.94 V	166	40.4	2.4
6	4934.00	29.4 AV	54.0	-24.6	3.94 V	166	27.0	2.4
7	7401.00	40.0 PK	74.0	-34.0	2.31 V	149	32.1	7.9
8	7401.00	30.3 AV	54.0	-23.7	2.31 V	149	22.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.4 PK			1.03 H	300	107.8	-2.4
2	*2472.00	97.0 AV			1.03 H	300	99.4	-2.4
3	2483.50	69.7 PK	74.0	-4.3	1.03 H	300	72.1	-2.4
4	2483.50	51.0 AV	54.0	-3.0	1.03 H	300	53.4	-2.4
5	4944.00	45.4 PK	74.0	-28.6	1.12 H	293	43.0	2.4
6	4944.00	32.0 AV	54.0	-22.0	1.12 H	293	29.6	2.4
7	7416.00	41.3 PK	74.0	-32.7	1.36 H	177	33.3	8.0
8	7416.00	31.6 AV	54.0	-22.4	1.36 H	177	23.6	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.9 PK			1.02 V	86	104.3	-2.4
2	*2472.00	93.2 AV			1.02 V	86	95.6	-2.4
3	2483.50	60.2 PK	74.0	-13.8	1.02 V	86	62.6	-2.4
4	2483.50	46.0 AV	54.0	-8.0	1.02 V	86	48.4	-2.4
5	4944.00	42.7 PK	74.0	-31.3	3.99 V	166	40.3	2.4
6	4944.00	29.1 AV	54.0	-24.9	3.99 V	166	26.7	2.4
7	7416.00	40.1 PK	74.0	-33.9	2.32 V	161	32.1	8.0
8	7416.00	30.5 AV	54.0	-23.5	2.32 V	161	22.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.86 H	203	72.9	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.86 H	203	54.4	-2.0
3	*2412.00	113.6 PK			1.86 H	203	115.7	-2.1
4	*2412.00	101.3 AV			1.86 H	203	103.4	-2.1
5	4824.00	42.2 PK	74.0	-31.8	1.60 H	255	40.1	2.1
6	4824.00	31.4 AV	54.0	-22.6	1.60 H	255	29.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.0 PK	74.0	-6.0	1.89 V	122	70.0	-2.0
2	2390.00	49.7 AV	54.0	-4.3	1.89 V	122	51.7	-2.0
3	*2412.00	109.4 PK			1.89 V	122	111.5	-2.1
4	*2412.00	97.1 AV			1.89 V	122	99.2	-2.1
5	4824.00	40.4 PK	74.0	-33.6	3.54 V	161	38.3	2.1
6	4824.00	29.8 AV	54.0	-24.2	3.54 V	161	27.7	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.01 H	166	72.2	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.01 H	166	54.4	-2.0
3	*2417.00	114.2 PK			1.01 H	166	116.3	-2.1
4	*2417.00	101.9 AV			1.01 H	166	104.0	-2.1
5	4834.00	42.6 PK	74.0	-31.4	1.60 H	256	40.5	2.1
6	4834.00	31.8 AV	54.0	-22.2	1.60 H	256	29.7	2.1
7	7251.00	40.1 PK	74.0	-33.9	1.07 H	175	32.5	7.6
8	7251.00	29.8 AV	54.0	-24.2	1.07 H	175	22.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	1.75 V	115	65.8	-2.0
2	2390.00	50.1 AV	54.0	-3.9	1.75 V	115	52.1	-2.0
3	*2417.00	109.8 PK			1.75 V	115	111.9	-2.1
4	*2417.00	97.7 AV			1.75 V	115	99.8	-2.1
5	4834.00	41.1 PK	74.0	-32.9	3.60 V	161	39.0	2.1
6	4834.00	30.4 AV	54.0	-23.6	3.60 V	161	28.3	2.1
7	7251.00	39.2 PK	74.0	-34.8	1.75 V	166	31.6	7.6
8	7251.00	29.0 AV	54.0	-25.0	1.75 V	166	21.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.56 H	204	69.9	-2.0
2	2390.00	50.8 AV	54.0	-3.2	1.56 H	204	52.8	-2.0
3	*2437.00	116.8 PK			1.56 H	204	118.9	-2.1
4	*2437.00	105.5 AV			1.56 H	204	107.6	-2.1
5	2483.50	63.8 PK	74.0	-10.2	1.56 H	204	66.2	-2.4
6	2483.50	46.9 AV	54.0	-7.1	1.56 H	204	49.3	-2.4
7	4874.00	41.9 PK	74.0	-32.1	1.60 H	262	39.5	2.4
8	4874.00	31.3 AV	54.0	-22.7	1.60 H	262	28.9	2.4
9	7311.00	40.1 PK	74.0	-33.9	1.03 H	188	32.7	7.4
10	7311.00	29.5 AV	54.0	-24.5	1.03 H	188	22.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	4.00 V	112	59.2	-2.0
2	2390.00	43.7 AV	54.0	-10.3	4.00 V	112	45.7	-2.0
3	*2437.00	112.9 PK			4.00 V	112	115.0	-2.1
4	*2437.00	100.3 AV			4.00 V	112	102.4	-2.1
5	2483.50	61.2 PK	74.0	-12.8	4.00 V	112	63.6	-2.4
6	2483.50	44.5 AV	54.0	-9.5	4.00 V	112	46.9	-2.4
7	4874.00	40.7 PK	74.0	-33.3	3.55 V	172	38.3	2.4
8	4874.00	30.2 AV	54.0	-23.8	3.55 V	172	27.8	2.4
9	7311.00	39.7 PK	74.0	-34.3	1.79 V	165	32.3	7.4
10	7311.00	29.3 AV	54.0	-24.7	1.79 V	165	21.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.6 PK			1.23 H	275	115.0	-2.4
2	*2457.00	101.0 AV			1.23 H	275	103.4	-2.4
3	2483.50	67.1 PK	74.0	-6.9	1.23 H	275	69.5	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.23 H	275	54.2	-2.4
5	4914.00	41.8 PK	74.0	-32.2	1.65 H	274	39.3	2.5
6	4914.00	31.4 AV	54.0	-22.6	1.65 H	274	28.9	2.5
7	7371.00	40.1 PK	74.0	-33.9	1.01 H	174	32.5	7.6
8	7371.00	29.6 AV	54.0	-24.4	1.01 H	174	22.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.4 PK			1.69 V	76	110.8	-2.4
2	*2457.00	96.2 AV			1.69 V	76	98.6	-2.4
3	2483.50	62.9 PK	74.0	-11.1	1.69 V	76	65.3	-2.4
4	2483.50	49.6 AV	54.0	-4.4	1.69 V	76	52.0	-2.4
5	4914.00	40.9 PK	74.0	-33.1	3.53 V	184	38.4	2.5
6	4914.00	30.5 AV	54.0	-23.5	3.53 V	184	28.0	2.5
7	7371.00	39.2 PK	74.0	-34.8	1.82 V	162	31.6	7.6
8	7371.00	28.9 AV	54.0	-25.1	1.82 V	162	21.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.2 PK			1.10 H	269	113.6	-2.4
2	*2462.00	99.5 AV			1.10 H	269	101.9	-2.4
3	2483.50	67.4 PK	74.0	-6.6	1.10 H	269	69.8	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.10 H	269	54.8	-2.4
5	4924.00	42.5 PK	74.0	-31.5	1.61 H	285	40.0	2.5
6	4924.00	31.9 AV	54.0	-22.1	1.61 H	285	29.4	2.5
7	7386.00	40.0 PK	74.0	-34.0	1.06 H	175	32.3	7.7
8	7386.00	29.7 AV	54.0	-24.3	1.06 H	175	22.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.9 PK			1.70 V	76	109.3	-2.4
2	*2462.00	94.8 AV			1.70 V	76	97.2	-2.4
3	2483.50	62.7 PK	74.0	-11.3	1.70 V	76	65.1	-2.4
4	2483.50	49.3 AV	54.0	-4.7	1.70 V	76	51.7	-2.4
5	4924.00	40.8 PK	74.0	-33.2	3.52 V	168	38.3	2.5
6	4924.00	30.7 AV	54.0	-23.3	3.52 V	168	28.2	2.5
7	7386.00	39.0 PK	74.0	-35.0	1.88 V	160	31.3	7.7
8	7386.00	28.6 AV	54.0	-25.4	1.88 V	160	20.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.4 PK			3.99 H	320	112.8	-2.4
2	*2467.00	98.2 AV			3.99 H	320	100.6	-2.4
3	2483.50	66.5 PK	74.0	-7.5	3.99 H	320	68.9	-2.4
4	2483.50	52.0 AV	54.0	-2.0	3.99 H	320	54.4	-2.4
5	4934.00	42.8 PK	74.0	-31.2	1.63 H	291	40.4	2.4
6	4934.00	32.1 AV	54.0	-21.9	1.63 H	291	29.7	2.4
7	7401.00	39.9 PK	74.0	-34.1	1.06 H	183	32.0	7.9
8	7401.00	29.8 AV	54.0	-24.2	1.06 H	183	21.9	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.8 PK			1.35 V	84	108.2	-2.4
2	*2467.00	94.4 AV			1.35 V	84	96.8	-2.4
3	2483.50	61.9 PK	74.0	-12.1	1.35 V	84	64.3	-2.4
4	2483.50	50.1 AV	54.0	-3.9	1.35 V	84	52.5	-2.4
5	4934.00	40.4 PK	74.0	-33.6	3.48 V	170	38.0	2.4
6	4934.00	30.5 AV	54.0	-23.5	3.48 V	170	28.1	2.4
7	7401.00	39.1 PK	74.0	-34.9	1.90 V	160	31.2	7.9
8	7401.00	28.6 AV	54.0	-25.4	1.90 V	160	20.7	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.4 PK			1.01 H	268	110.8	-2.4
2	*2472.00	96.8 AV			1.01 H	268	99.2	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.01 H	268	74.8	-2.4
4	2483.50	50.5 AV	54.0	-3.5	1.01 H	268	52.9	-2.4
5	4944.00	43.0 PK	74.0	-31.0	1.64 H	287	40.6	2.4
6	4944.00	32.3 AV	54.0	-21.7	1.64 H	287	29.9	2.4
7	7416.00	39.6 PK	74.0	-34.4	1.02 H	195	31.6	8.0
8	7416.00	29.5 AV	54.0	-24.5	1.02 H	195	21.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.2 PK			1.35 V	84	108.6	-2.4
2	*2472.00	93.2 AV			1.35 V	84	95.6	-2.4
3	2483.50	64.8 PK	74.0	-9.2	1.35 V	84	67.2	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.35 V	84	49.2	-2.4
5	4944.00	39.9 PK	74.0	-34.1	3.54 V	175	37.5	2.4
6	4944.00	30.2 AV	54.0	-23.8	3.54 V	175	27.8	2.4
7	7416.00	39.3 PK	74.0	-34.7	1.92 V	149	31.3	8.0
8	7416.00	28.6 AV	54.0	-25.4	1.92 V	149	20.6	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.51 H	164	73.0	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.51 H	164	54.4	-2.0
3	*2422.00	109.4 PK			1.51 H	164	111.5	-2.1
4	*2422.00	97.5 AV			1.51 H	164	99.6	-2.1
5	4844.00	33.9 PK	74.0	-40.1	1.70 H	227	31.7	2.2
6	4844.00	23.2 AV	54.0	-30.8	1.70 H	227	21.0	2.2
7	7266.00	34.7 PK	74.0	-39.3	1.88 H	144	27.1	7.6
8	7266.00	22.4 AV	54.0	-31.6	1.88 H	144	14.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.7 PK	74.0	-10.3	1.80 V	116	65.7	-2.0
2	2390.00	49.7 AV	54.0	-4.3	1.80 V	116	51.7	-2.0
3	*2422.00	105.8 PK			1.80 V	116	107.9	-2.1
4	*2422.00	93.3 AV			1.80 V	116	95.4	-2.1
5	4844.00	33.5 PK	74.0	-40.5	1.77 V	316	31.3	2.2
6	4844.00	22.8 AV	54.0	-31.2	1.77 V	316	20.6	2.2
7	7266.00	33.7 PK	74.0	-40.3	1.23 V	269	26.1	7.6
8	7266.00	22.2 AV	54.0	-31.8	1.23 V	269	14.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.1 PK	74.0	-7.9	1.23 H	163	68.1	-2.0
2	2390.00	51.7 AV	54.0	-2.3	1.23 H	163	53.7	-2.0
3	*2437.00	109.9 PK			1.23 H	163	112.0	-2.1
4	*2437.00	98.8 AV			1.23 H	163	100.9	-2.1
5	2483.50	63.8 PK	74.0	-10.2	1.23 H	163	66.2	-2.4
6	2483.50	49.3 AV	54.0	-4.7	1.23 H	163	51.7	-2.4
7	4874.00	34.5 PK	74.0	-39.5	1.66 H	231	32.1	2.4
8	4874.00	23.5 AV	54.0	-30.5	1.66 H	231	21.1	2.4
9	7311.00	34.5 PK	74.0	-39.5	1.89 H	142	27.1	7.4
10	7311.00	22.5 AV	54.0	-31.5	1.89 H	142	15.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	3.99 V	104	63.5	-2.0
2	2390.00	46.1 AV	54.0	-7.9	3.99 V	104	48.1	-2.0
3	*2437.00	105.1 PK			3.99 V	104	107.2	-2.1
4	*2437.00	93.5 AV			3.99 V	104	95.6	-2.1
5	2483.50	55.3 PK	74.0	-18.7	3.99 V	104	57.7	-2.4
6	2483.50	43.5 AV	54.0	-10.5	3.99 V	104	45.9	-2.4
7	4874.00	33.5 PK	74.0	-40.5	1.80 V	310	31.1	2.4
8	4874.00	23.1 AV	54.0	-30.9	1.80 V	310	20.7	2.4
9	7311.00	33.9 PK	74.0	-40.1	1.23 V	277	26.5	7.4
10	7311.00	22.3 AV	54.0	-31.7	1.23 V	277	14.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	107.6 PK			1.27 H	201	109.8	-2.2
2	*2452.00	95.9 AV			1.27 H	201	98.1	-2.2
3	2483.50	67.1 PK	74.0	-6.9	1.27 H	201	69.5	-2.4
4	2483.50	52.1 AV	54.0	-1.9	1.27 H	201	54.5	-2.4
5	4904.00	34.6 PK	74.0	-39.4	1.62 H	241	32.1	2.5
6	4904.00	23.6 AV	54.0	-30.4	1.62 H	241	21.1	2.5
7	7356.00	35.0 PK	74.0	-39.0	1.90 H	137	27.5	7.5
8	7356.00	22.9 AV	54.0	-31.1	1.90 H	137	15.4	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.6 PK			1.75 V	108	105.8	-2.2
2	*2452.00	91.3 AV			1.75 V	108	93.5	-2.2
3	2483.50	62.1 PK	74.0	-11.9	1.75 V	108	64.5	-2.4
4	2483.50	48.4 AV	54.0	-5.6	1.75 V	108	50.8	-2.4
5	4904.00	33.1 PK	74.0	-40.9	1.74 V	301	30.6	2.5
6	4904.00	22.7 AV	54.0	-31.3	1.74 V	301	20.2	2.5
7	7356.00	34.4 PK	74.0	-39.6	1.25 V	290	26.9	7.5
8	7356.00	22.8 AV	54.0	-31.2	1.25 V	290	15.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.2 PK			1.43 H	301	109.6	-2.4
2	*2457.00	96.0 AV			1.43 H	301	98.4	-2.4
3	2483.50	70.0 PK	74.0	-4.0	1.43 H	301	72.4	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.43 H	301	54.8	-2.4
5	4914.00	34.0 PK	74.0	-40.0	1.61 H	239	31.5	2.5
6	4914.00	23.1 AV	54.0	-30.9	1.61 H	239	20.6	2.5
7	7371.00	35.3 PK	74.0	-38.7	1.91 H	139	27.7	7.6
8	7371.00	23.0 AV	54.0	-31.0	1.91 H	139	15.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.0 PK			1.11 V	85	106.4	-2.4
2	*2457.00	91.5 AV			1.11 V	85	93.9	-2.4
3	2483.50	69.0 PK	74.0	-5.0	1.11 V	85	71.4	-2.4
4	2483.50	50.8 AV	54.0	-3.2	1.11 V	85	53.2	-2.4
5	4914.00	32.4 PK	74.0	-41.6	1.77 V	286	29.9	2.5
6	4914.00	22.2 AV	54.0	-31.8	1.77 V	286	19.7	2.5
7	7371.00	34.5 PK	74.0	-39.5	1.23 V	295	26.9	7.6
8	7371.00	22.4 AV	54.0	-31.6	1.23 V	295	14.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.8 PK			1.26 H	203	106.2	-2.4
2	*2462.00	91.5 AV			1.26 H	203	93.9	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.26 H	203	74.8	-2.4
4	2483.50	45.8 AV	54.0	-8.2	1.26 H	203	48.2	-2.4
5	4924.00	34.5 PK	74.0	-39.5	1.61 H	246	32.0	2.5
6	4924.00	23.5 AV	54.0	-30.5	1.61 H	246	21.0	2.5
7	7386.00	35.2 PK	74.0	-38.8	1.89 H	130	27.5	7.7
8	7386.00	22.9 AV	54.0	-31.1	1.89 H	130	15.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.1 PK			1.09 V	85	103.5	-2.4
2	*2462.00	88.8 AV			1.09 V	85	91.2	-2.4
3	2483.50	70.7 PK	74.0	-3.3	1.09 V	85	73.1	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.09 V	85	47.8	-2.4
5	4924.00	32.1 PK	74.0	-41.9	1.83 V	289	29.6	2.5
6	4924.00	22.0 AV	54.0	-32.0	1.83 V	289	19.5	2.5
7	7386.00	33.9 PK	74.0	-40.1	1.28 V	291	26.2	7.7
8	7386.00	22.1 AV	54.0	-31.9	1.28 V	291	14.4	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.09 H	280	74.4	-2.0
2	2390.00	46.1 AV	54.0	-7.9	1.09 H	280	48.1	-2.0
3	*2412.00	123.7 PK			1.09 H	280	125.8	-2.1
4	*2412.00	111.8 AV			1.09 H	280	113.9	-2.1
5	4824.00	42.7 PK	74.0	-31.3	1.60 H	263	40.6	2.1
6	4824.00	31.9 AV	54.0	-22.1	1.60 H	263	29.8	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.8 PK	74.0	-15.2	2.02 V	129	60.8	-2.0
2	2390.00	44.9 AV	54.0	-9.1	2.02 V	129	46.9	-2.0
3	*2412.00	114.8 PK			2.02 V	129	116.9	-2.1
4	*2412.00	105.1 AV			2.02 V	129	107.2	-2.1
5	4824.00	41.0 PK	74.0	-33.0	3.62 V	153	38.9	2.1
6	4824.00	30.4 AV	54.0	-23.6	3.62 V	153	28.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.11 H	281	73.6	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.11 H	281	48.3	-2.0
3	*2417.00	124.6 PK			1.11 H	281	126.7	-2.1
4	*2417.00	112.8 AV			1.11 H	281	114.9	-2.1
5	4834.00	42.3 PK	74.0	-31.7	1.66 H	268	40.2	2.1
6	4834.00	31.5 AV	54.0	-22.5	1.66 H	268	29.4	2.1
7	7251.00	40.4 PK	74.0	-33.6	1.01 H	192	32.8	7.6
8	7251.00	29.9 AV	54.0	-24.1	1.01 H	192	22.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.5 PK	74.0	-3.5	2.64 V	148	72.5	-2.0
2	2390.00	45.2 AV	54.0	-8.8	2.64 V	148	47.2	-2.0
3	*2417.00	117.8 PK			2.64 V	148	119.9	-2.1
4	*2417.00	106.5 AV			2.64 V	148	108.6	-2.1
5	4834.00	40.6 PK	74.0	-33.4	3.64 V	151	38.5	2.1
6	4834.00	30.0 AV	54.0	-24.0	3.64 V	151	27.9	2.1
7	7251.00	39.3 PK	74.0	-34.7	1.79 V	154	31.7	7.6
8	7251.00	29.1 AV	54.0	-24.9	1.79 V	154	21.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.07 H	281	73.6	-2.0
2	2390.00	45.5 AV	54.0	-8.5	1.07 H	281	47.5	-2.0
3	*2437.00	125.5 PK			1.07 H	281	127.6	-2.1
4	*2437.00	113.1 AV			1.07 H	281	115.2	-2.1
5	2483.50	62.6 PK	74.0	-11.4	1.07 H	281	65.0	-2.4
6	2483.50	44.4 AV	54.0	-9.6	1.07 H	281	46.8	-2.4
7	4874.00	41.9 PK	74.0	-32.1	1.67 H	263	39.5	2.4
8	4874.00	31.2 AV	54.0	-22.8	1.67 H	263	28.8	2.4
9	7311.00	40.4 PK	74.0	-33.6	1.03 H	192	33.0	7.4
10	7311.00	29.6 AV	54.0	-24.4	1.03 H	192	22.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	3.75 V	8	62.4	-2.0
2	2390.00	44.8 AV	54.0	-9.2	3.75 V	8	46.8	-2.0
3	*2437.00	118.3 PK			3.75 V	8	120.4	-2.1
4	*2437.00	108.1 AV			3.75 V	8	110.2	-2.1
5	2483.50	57.3 PK	74.0	-16.7	3.75 V	8	59.7	-2.4
6	2483.50	44.4 AV	54.0	-9.6	3.75 V	8	46.8	-2.4
7	4874.00	40.4 PK	74.0	-33.6	3.63 V	137	38.0	2.4
8	4874.00	29.5 AV	54.0	-24.5	3.63 V	137	27.1	2.4
9	7311.00	39.5 PK	74.0	-34.5	1.83 V	158	32.1	7.4
10	7311.00	29.3 AV	54.0	-24.7	1.83 V	158	21.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.3 PK			2.64 H	285	120.7	-2.4
2	*2457.00	108.1 AV			2.64 H	285	110.5	-2.4
3	2483.50	72.4 PK	74.0	-1.6	2.64 H	285	74.8	-2.4
4	2483.50	45.0 AV	54.0	-9.0	2.64 H	285	47.4	-2.4
5	4914.00	41.7 PK	74.0	-32.3	1.65 H	261	39.2	2.5
6	4914.00	31.2 AV	54.0	-22.8	1.65 H	261	28.7	2.5
7	7371.00	40.8 PK	74.0	-33.2	1.07 H	207	33.2	7.6
8	7371.00	29.9 AV	54.0	-24.1	1.07 H	207	22.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.1 PK			2.05 V	315	116.5	-2.4
2	*2457.00	103.5 AV			2.05 V	315	105.9	-2.4
3	2483.50	60.6 PK	74.0	-13.4	2.05 V	315	63.0	-2.4
4	2483.50	44.3 AV	54.0	-9.7	2.05 V	315	46.7	-2.4
5	4914.00	40.3 PK	74.0	-33.7	3.68 V	136	37.8	2.5
6	4914.00	29.5 AV	54.0	-24.5	3.68 V	136	27.0	2.5
7	7371.00	39.3 PK	74.0	-34.7	1.87 V	153	31.7	7.6
8	7371.00	29.2 AV	54.0	-24.8	1.87 V	153	21.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.5 PK			1.61 H	281	120.9	-2.4
2	*2462.00	108.3 AV			1.61 H	281	110.7	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.61 H	281	73.9	-2.4
4	2483.50	46.0 AV	54.0	-8.0	1.61 H	281	48.4	-2.4
5	4924.00	42.0 PK	74.0	-32.0	1.62 H	250	39.5	2.5
6	4924.00	31.5 AV	54.0	-22.5	1.62 H	250	29.0	2.5
7	7386.00	41.1 PK	74.0	-32.9	1.03 H	198	33.4	7.7
8	7386.00	30.2 AV	54.0	-23.8	1.03 H	198	22.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.4 PK			2.77 V	305	115.8	-2.4
2	*2462.00	103.2 AV			2.77 V	305	105.6	-2.4
3	2483.50	65.9 PK	74.0	-8.1	2.77 V	305	68.3	-2.4
4	2483.50	44.8 AV	54.0	-9.2	2.77 V	305	47.2	-2.4
5	4924.00	40.1 PK	74.0	-33.9	3.71 V	136	37.6	2.5
6	4924.00	29.3 AV	54.0	-24.7	3.71 V	136	26.8	2.5
7	7386.00	39.3 PK	74.0	-34.7	1.85 V	159	31.6	7.7
8	7386.00	28.9 AV	54.0	-25.1	1.85 V	159	21.2	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.0 PK			2.64 H	279	121.4	-2.4
2	*2467.00	108.6 AV			2.64 H	279	111.0	-2.4
3	2483.50	72.0 PK	74.0	-2.0	2.64 H	279	74.4	-2.4
4	2483.50	46.8 AV	54.0	-7.2	2.64 H	279	49.2	-2.4
5	4934.00	41.6 PK	74.0	-32.4	1.63 H	256	39.2	2.4
6	4934.00	31.0 AV	54.0	-23.0	1.63 H	256	28.6	2.4
7	7401.00	41.3 PK	74.0	-32.7	1.15 H	190	33.4	7.9
8	7401.00	30.6 AV	54.0	-23.4	1.15 H	190	22.7	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	114.5 PK			2.78 V	311	116.9	-2.4
2	*2467.00	103.8 AV			2.78 V	311	106.2	-2.4
3	2483.50	68.7 PK	74.0	-5.3	2.78 V	311	71.1	-2.4
4	2483.50	45.0 AV	54.0	-9.0	2.78 V	311	47.4	-2.4
5	4934.00	39.7 PK	74.0	-34.3	3.50 V	125	37.3	2.4
6	4934.00	28.8 AV	54.0	-25.2	3.50 V	125	26.4	2.4
7	7401.00	39.7 PK	74.0	-34.3	1.81 V	157	31.8	7.9
8	7401.00	29.3 AV	54.0	-24.7	1.81 V	157	21.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.5 PK			1.20 H	311	115.9	-2.4
2	*2472.00	104.8 AV			1.20 H	311	107.2	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.20 H	311	73.7	-2.4
4	2483.50	47.4 AV	54.0	-6.6	1.20 H	311	49.8	-2.4
5	4944.00	41.8 PK	74.0	-32.2	1.62 H	251	39.4	2.4
6	4944.00	31.3 AV	54.0	-22.7	1.62 H	251	28.9	2.4
7	7416.00	40.7 PK	74.0	-33.3	1.15 H	180	32.7	8.0
8	7416.00	30.3 AV	54.0	-23.7	1.15 H	180	22.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.0 PK			2.97 V	310	114.4	-2.4
2	*2472.00	100.1 AV			2.97 V	310	102.5	-2.4
3	2483.50	69.1 PK	74.0	-4.9	2.97 V	310	71.5	-2.4
4	2483.50	45.4 AV	54.0	-8.6	2.97 V	310	47.8	-2.4
5	4944.00	39.5 PK	74.0	-34.5	3.54 V	129	37.1	2.4
6	4944.00	28.7 AV	54.0	-25.3	3.54 V	129	26.3	2.4
7	7416.00	39.7 PK	74.0	-34.3	1.77 V	149	31.7	8.0
8	7416.00	29.5 AV	54.0	-24.5	1.77 V	149	21.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.52 H	278	73.4	-2.0
2	2390.00	46.9 AV	54.0	-7.1	1.52 H	278	48.9	-2.0
3	*2412.00	121.7 PK			1.52 H	278	123.8	-2.1
4	*2412.00	110.0 AV			1.52 H	278	112.1	-2.1
5	4824.00	41.6 PK	74.0	-32.4	1.65 H	258	39.5	2.1
6	4824.00	31.1 AV	54.0	-22.9	1.65 H	258	29.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	3.54 V	136	71.3	-2.0
2	2390.00	46.7 AV	54.0	-7.3	3.54 V	136	48.7	-2.0
3	*2412.00	118.5 PK			3.54 V	136	120.6	-2.1
4	*2412.00	107.5 AV			3.54 V	136	109.6	-2.1
5	4824.00	40.0 PK	74.0	-34.0	3.51 V	141	37.9	2.1
6	4824.00	29.1 AV	54.0	-24.9	3.51 V	141	27.0	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.1 PK	74.0	-2.9	1.33 H	283	73.1	-2.0
2	2390.00	46.4 AV	54.0	-7.6	1.33 H	283	48.4	-2.0
3	*2417.00	121.5 PK			1.33 H	283	123.6	-2.1
4	*2417.00	110.2 AV			1.33 H	283	112.3	-2.1
5	4834.00	41.6 PK	74.0	-32.4	1.65 H	258	39.5	2.1
6	4834.00	31.1 AV	54.0	-22.9	1.65 H	258	29.0	2.1
7	7251.00	40.7 PK	74.0	-33.3	1.09 H	181	33.1	7.6
8	7251.00	30.5 AV	54.0	-23.5	1.09 H	181	22.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	2.61 V	314	69.7	-2.0
2	2390.00	44.6 AV	54.0	-9.4	2.61 V	314	46.6	-2.0
3	*2417.00	114.6 PK			2.61 V	314	116.7	-2.1
4	*2417.00	103.3 AV			2.61 V	314	105.4	-2.1
5	4834.00	40.0 PK	74.0	-34.0	3.51 V	141	37.9	2.1
6	4834.00	29.1 AV	54.0	-24.9	3.51 V	141	27.0	2.1
7	7251.00	40.3 PK	74.0	-33.7	1.82 V	163	32.7	7.6
8	7251.00	29.8 AV	54.0	-24.2	1.82 V	163	22.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.02 H	282	73.6	-2.0
2	2390.00	46.2 AV	54.0	-7.8	1.02 H	282	48.2	-2.0
3	*2437.00	122.8 PK			1.02 H	282	124.9	-2.1
4	*2437.00	110.6 AV			1.02 H	282	112.7	-2.1
5	2483.50	62.6 PK	74.0	-11.4	1.02 H	282	65.0	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.02 H	282	46.6	-2.4
7	4874.00	41.3 PK	74.0	-32.7	1.69 H	259	38.9	2.4
8	4874.00	30.8 AV	54.0	-23.2	1.69 H	259	28.4	2.4
9	7311.00	40.6 PK	74.0	-33.4	1.12 H	182	33.2	7.4
10	7311.00	30.7 AV	54.0	-23.3	1.12 H	182	23.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	2.30 V	320	66.8	-2.0
2	2390.00	44.4 AV	54.0	-9.6	2.30 V	320	46.4	-2.0
3	*2437.00	115.4 PK			2.30 V	320	117.5	-2.1
4	*2437.00	104.4 AV			2.30 V	320	106.5	-2.1
5	2483.50	56.7 PK	74.0	-17.3	2.30 V	320	59.1	-2.4
6	2483.50	44.2 AV	54.0	-9.8	2.30 V	320	46.6	-2.4
7	4874.00	39.6 PK	74.0	-34.4	3.53 V	140	37.2	2.4
8	4874.00	28.6 AV	54.0	-25.4	3.53 V	140	26.2	2.4
9	7311.00	40.4 PK	74.0	-33.6	1.77 V	159	33.0	7.4
10	7311.00	29.8 AV	54.0	-24.2	1.77 V	159	22.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	117.2 PK			1.02 H	287	119.6	-2.4
2	*2457.00	105.3 AV			1.02 H	287	107.7	-2.4
3	2483.50	71.8 PK	74.0	-2.2	1.02 H	287	74.2	-2.4
4	2483.50	45.0 AV	54.0	-9.0	1.02 H	287	47.4	-2.4
5	4914.00	41.6 PK	74.0	-32.4	1.67 H	269	39.1	2.5
6	4914.00	31.0 AV	54.0	-23.0	1.67 H	269	28.5	2.5
7	7371.00	40.7 PK	74.0	-33.3	1.16 H	182	33.1	7.6
8	7371.00	31.0 AV	54.0	-23.0	1.16 H	182	23.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.0 PK			2.80 V	308	114.4	-2.4
2	*2457.00	101.2 AV			2.80 V	308	103.6	-2.4
3	2483.50	71.2 PK	74.0	-2.8	2.80 V	308	73.6	-2.4
4	2483.50	44.8 AV	54.0	-9.2	2.80 V	308	47.2	-2.4
5	4914.00	40.1 PK	74.0	-33.9	3.59 V	126	37.6	2.5
6	4914.00	28.9 AV	54.0	-25.1	3.59 V	126	26.4	2.5
7	7371.00	40.3 PK	74.0	-33.7	1.78 V	150	32.7	7.6
8	7371.00	29.9 AV	54.0	-24.1	1.78 V	150	22.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.7 PK			1.38 H	280	119.1	-2.4
2	*2462.00	105.4 AV			1.38 H	280	107.8	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.38 H	280	73.8	-2.4
4	2483.50	45.0 AV	54.0	-9.0	1.38 H	280	47.4	-2.4
5	4924.00	41.3 PK	74.0	-32.7	1.70 H	256	38.8	2.5
6	4924.00	30.7 AV	54.0	-23.3	1.70 H	256	28.2	2.5
7	7386.00	41.2 PK	74.0	-32.8	1.16 H	187	33.5	7.7
8	7386.00	31.4 AV	54.0	-22.6	1.16 H	187	23.7	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.5 PK			2.51 V	303	114.9	-2.4
2	*2462.00	101.8 AV			2.51 V	303	104.2	-2.4
3	2483.50	70.1 PK	74.0	-3.9	2.51 V	303	72.5	-2.4
4	2483.50	44.7 AV	54.0	-9.3	2.51 V	303	47.1	-2.4
5	4924.00	39.9 PK	74.0	-34.1	3.59 V	126	37.4	2.5
6	4924.00	28.4 AV	54.0	-25.6	3.59 V	126	25.9	2.5
7	7386.00	40.8 PK	74.0	-33.2	1.83 V	162	33.1	7.7
8	7386.00	30.4 AV	54.0	-23.6	1.83 V	162	22.7	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.6 PK			1.19 H	341	119.0	-2.4
2	*2467.00	104.9 AV			1.19 H	341	107.3	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.19 H	341	73.7	-2.4
4	2483.50	46.2 AV	54.0	-7.8	1.19 H	341	48.6	-2.4
5	4934.00	41.0 PK	74.0	-33.0	1.68 H	254	38.6	2.4
6	4934.00	30.3 AV	54.0	-23.7	1.68 H	254	27.9	2.4
7	7401.00	41.4 PK	74.0	-32.6	1.18 H	189	33.5	7.9
8	7401.00	31.5 AV	54.0	-22.5	1.18 H	189	23.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.3 PK			2.76 V	304	114.7	-2.4
2	*2467.00	100.8 AV			2.76 V	304	103.2	-2.4
3	2483.50	67.7 PK	74.0	-6.3	2.76 V	304	70.1	-2.4
4	2483.50	45.0 AV	54.0	-9.0	2.76 V	304	47.4	-2.4
5	4934.00	40.0 PK	74.0	-34.0	3.57 V	118	37.6	2.4
6	4934.00	28.7 AV	54.0	-25.3	3.57 V	118	26.3	2.4
7	7401.00	41.4 PK	74.0	-32.6	1.79 V	150	33.5	7.9
8	7401.00	30.7 AV	54.0	-23.3	1.79 V	150	22.8	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.6 PK			1.15 H	310	117.0	-2.4
2	*2472.00	104.3 AV			1.15 H	310	106.7	-2.4
3	2483.50	71.8 PK	74.0	-2.2	1.15 H	310	74.2	-2.4
4	2483.50	49.5 AV	54.0	-4.5	1.15 H	310	51.9	-2.4
5	4944.00	41.7 PK	74.0	-32.3	1.68 H	244	39.3	2.4
6	4944.00	30.7 AV	54.0	-23.3	1.68 H	244	28.3	2.4
7	7416.00	40.7 PK	74.0	-33.3	1.22 H	186	32.7	8.0
8	7416.00	31.1 AV	54.0	-22.9	1.22 H	186	23.1	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.2 PK			2.48 V	152	112.6	-2.4
2	*2472.00	99.5 AV			2.48 V	152	101.9	-2.4
3	2483.50	70.3 PK	74.0	-3.7	2.48 V	152	72.7	-2.4
4	2483.50	47.6 AV	54.0	-6.4	2.48 V	152	50.0	-2.4
5	4944.00	40.6 PK	74.0	-33.4	3.57 V	131	38.2	2.4
6	4944.00	29.1 AV	54.0	-24.9	3.57 V	131	26.7	2.4
7	7416.00	41.0 PK	74.0	-33.0	1.83 V	161	33.0	8.0
8	7416.00	30.3 AV	54.0	-23.7	1.83 V	161	22.3	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.31 H	264	74.0	-2.0
2	2390.00	46.0 AV	54.0	-8.0	1.31 H	264	48.0	-2.0
3	*2412.00	115.0 PK			1.31 H	264	117.1	-2.1
4	*2412.00	103.1 AV			1.31 H	264	105.2	-2.1
5	4824.00	41.8 PK	74.0	-32.2	1.70 H	269	39.7	2.1
6	4824.00	30.7 AV	54.0	-23.3	1.70 H	269	28.6	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.2 PK	74.0	-9.8	2.90 V	137	66.2	-2.0
2	2390.00	45.4 AV	54.0	-8.6	2.90 V	137	47.4	-2.0
3	*2412.00	114.0 PK			2.90 V	137	116.1	-2.1
4	*2412.00	102.6 AV			2.90 V	137	104.7	-2.1
5	4824.00	41.4 PK	74.0	-32.6	3.54 V	109	39.3	2.1
6	4824.00	30.0 AV	54.0	-24.0	3.54 V	109	27.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.14 H	269	73.6	-2.0
2	2390.00	45.2 AV	54.0	-8.8	1.14 H	269	47.2	-2.0
3	*2417.00	114.5 PK			1.14 H	269	116.6	-2.1
4	*2417.00	103.2 AV			1.14 H	269	105.3	-2.1
5	4834.00	41.6 PK	74.0	-32.4	1.66 H	256	39.5	2.1
6	4834.00	30.5 AV	54.0	-23.5	1.66 H	256	28.4	2.1
7	7251.00	40.8 PK	74.0	-33.2	1.19 H	174	33.2	7.6
8	7251.00	31.1 AV	54.0	-22.9	1.19 H	174	23.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.3 PK	74.0	-3.7	2.60 V	142	72.3	-2.0
2	2390.00	46.0 AV	54.0	-8.0	2.60 V	142	48.0	-2.0
3	*2417.00	113.5 PK			2.60 V	142	115.6	-2.1
4	*2417.00	102.4 AV			2.60 V	142	104.5	-2.1
5	4834.00	41.1 PK	74.0	-32.9	3.55 V	119	39.0	2.1
6	4834.00	29.5 AV	54.0	-24.5	3.55 V	119	27.4	2.1
7	7251.00	41.1 PK	74.0	-32.9	1.86 V	167	33.5	7.6
8	7251.00	30.2 AV	54.0	-23.8	1.86 V	167	22.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.24 H	350	74.3	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.24 H	350	48.3	-2.0
3	*2437.00	116.8 PK			1.24 H	350	118.9	-2.1
4	*2437.00	105.2 AV			1.24 H	350	107.3	-2.1
5	2483.50	62.1 PK	74.0	-11.9	1.24 H	350	64.5	-2.4
6	2483.50	44.4 AV	54.0	-9.6	1.24 H	350	46.8	-2.4
7	4874.00	44.2 PK	74.0	-29.8	1.65 H	246	41.8	2.4
8	4874.00	35.4 AV	54.0	-18.6	1.65 H	246	33.0	2.4
9	7311.00	46.3 PK	74.0	-27.7	1.18 H	160	38.9	7.4
10	7311.00	37.6 AV	54.0	-16.4	1.18 H	160	30.2	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	2.46 V	139	69.9	-2.0
2	2390.00	46.1 AV	54.0	-7.9	2.46 V	139	48.1	-2.0
3	*2437.00	115.0 PK			2.46 V	139	117.1	-2.1
4	*2437.00	104.3 AV			2.46 V	139	106.4	-2.1
5	2483.50	60.2 PK	74.0	-13.8	2.46 V	139	62.6	-2.4
6	2483.50	44.4 AV	54.0	-9.6	2.46 V	139	46.8	-2.4
7	4874.00	41.5 PK	74.0	-32.5	3.54 V	107	39.1	2.4
8	4874.00	30.2 AV	54.0	-23.8	3.54 V	107	27.8	2.4
9	7311.00	41.8 PK	74.0	-32.2	1.83 V	159	34.4	7.4
10	7311.00	32.5 AV	54.0	-21.5	1.83 V	159	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.5 PK			1.24 H	356	115.9	-2.4
2	*2457.00	102.3 AV			1.24 H	356	104.7	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.24 H	356	74.1	-2.4
4	2483.50	45.9 AV	54.0	-8.1	1.24 H	356	48.3	-2.4
5	4914.00	44.5 PK	74.0	-29.5	1.69 H	259	42.0	2.5
6	4914.00	35.9 AV	54.0	-18.1	1.69 H	259	33.4	2.5
7	7371.00	46.8 PK	74.0	-27.2	1.30 H	165	39.2	7.6
8	7371.00	37.9 AV	54.0	-16.1	1.30 H	165	30.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	111.2 PK			1.54 V	115	113.6	-2.4
2	*2457.00	99.6 AV			1.54 V	115	102.0	-2.4
3	2483.50	63.6 PK	74.0	-10.4	1.54 V	115	66.0	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.54 V	115	47.0	-2.4
5	4914.00	40.7 PK	74.0	-33.3	3.20 V	121	38.2	2.5
6	4914.00	29.7 AV	54.0	-24.3	3.20 V	121	27.2	2.5
7	7371.00	41.9 PK	74.0	-32.1	1.83 V	161	34.3	7.6
8	7371.00	32.4 AV	54.0	-21.6	1.83 V	161	24.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.46 H	261	115.3	-2.4
2	*2462.00	101.1 AV			1.46 H	261	103.5	-2.4
3	2483.50	72.1 PK	74.0	-1.9	1.46 H	261	74.5	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.46 H	261	47.8	-2.4
5	4924.00	43.7 PK	74.0	-30.3	1.60 H	233	41.2	2.5
6	4924.00	35.1 AV	54.0	-18.9	1.60 H	233	32.6	2.5
7	7386.00	46.2 PK	74.0	-27.8	1.13 H	150	38.5	7.7
8	7386.00	37.7 AV	54.0	-16.3	1.13 H	150	30.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.5 PK			2.46 V	310	111.9	-2.4
2	*2462.00	98.6 AV			2.46 V	310	101.0	-2.4
3	2483.50	56.6 PK	74.0	-17.4	2.46 V	310	59.0	-2.4
4	2483.50	44.4 AV	54.0	-9.6	2.46 V	310	46.8	-2.4
5	4924.00	41.4 PK	74.0	-32.6	3.53 V	116	38.9	2.5
6	4924.00	29.9 AV	54.0	-24.1	3.53 V	116	27.4	2.5
7	7386.00	41.6 PK	74.0	-32.4	1.79 V	165	33.9	7.7
8	7386.00	32.3 AV	54.0	-21.7	1.79 V	165	24.6	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.0 PK			1.32 H	356	115.4	-2.4
2	*2467.00	101.2 AV			1.32 H	356	103.6	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.32 H	356	73.6	-2.4
4	2483.50	47.1 AV	54.0	-6.9	1.32 H	356	49.5	-2.4
5	4934.00	44.0 PK	74.0	-30.0	1.57 H	231	41.6	2.4
6	4934.00	35.6 AV	54.0	-18.4	1.57 H	231	33.2	2.4
7	7401.00	46.1 PK	74.0	-27.9	1.10 H	146	38.2	7.9
8	7401.00	37.5 AV	54.0	-16.5	1.10 H	146	29.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.6 PK			2.27 V	305	111.0	-2.4
2	*2467.00	97.7 AV			2.27 V	305	100.1	-2.4
3	2483.50	64.5 PK	74.0	-9.5	2.27 V	305	66.9	-2.4
4	2483.50	45.0 AV	54.0	-9.0	2.27 V	305	47.4	-2.4
5	4934.00	41.6 PK	74.0	-32.4	3.49 V	108	39.2	2.4
6	4934.00	30.2 AV	54.0	-23.8	3.49 V	108	27.8	2.4
7	7401.00	41.3 PK	74.0	-32.7	1.79 V	173	33.4	7.9
8	7401.00	31.9 AV	54.0	-22.1	1.79 V	173	24.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.6 PK			1.20 H	340	114.0	-2.4
2	*2472.00	99.8 AV			1.20 H	340	102.2	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.20 H	340	74.6	-2.4
4	2483.50	49.1 AV	54.0	-4.9	1.20 H	340	51.5	-2.4
5	4944.00	43.5 PK	74.0	-30.5	1.57 H	243	41.1	2.4
6	4944.00	35.2 AV	54.0	-18.8	1.57 H	243	32.8	2.4
7	7416.00	46.0 PK	74.0	-28.0	1.11 H	131	38.0	8.0
8	7416.00	37.3 AV	54.0	-16.7	1.11 H	131	29.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.1 PK			2.10 V	293	109.5	-2.4
2	*2472.00	95.1 AV			2.10 V	293	97.5	-2.4
3	2483.50	65.7 PK	74.0	-8.3	2.10 V	293	68.1	-2.4
4	2483.50	48.9 AV	54.0	-5.1	2.10 V	293	51.3	-2.4
5	4944.00	41.4 PK	74.0	-32.6	3.45 V	105	39.0	2.4
6	4944.00	30.3 AV	54.0	-23.7	3.45 V	105	27.9	2.4
7	7416.00	41.7 PK	74.0	-32.3	1.73 V	178	33.7	8.0
8	7416.00	32.1 AV	54.0	-21.9	1.73 V	178	24.1	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.13 H	268	73.9	-2.0
2	2390.00	45.5 AV	54.0	-8.5	1.13 H	268	47.5	-2.0
3	*2412.00	115.9 PK			1.13 H	268	118.0	-2.1
4	*2412.00	104.3 AV			1.13 H	268	106.4	-2.1
5	4824.00	44.3 PK	74.0	-29.7	1.66 H	228	42.2	2.1
6	4824.00	36.1 AV	54.0	-17.9	1.66 H	228	34.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.6 PK	74.0	-4.4	3.08 V	134	71.6	-2.0
2	2390.00	45.0 AV	54.0	-9.0	3.08 V	134	47.0	-2.0
3	*2412.00	115.4 PK			3.08 V	134	117.5	-2.1
4	*2412.00	103.2 AV			3.08 V	134	105.3	-2.1
5	4824.00	40.9 PK	74.0	-33.1	3.20 V	83	38.8	2.1
6	4824.00	30.6 AV	54.0	-23.4	3.20 V	83	28.5	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.14 H	267	74.0	-2.0
2	2390.00	46.2 AV	54.0	-7.8	1.14 H	267	48.2	-2.0
3	*2417.00	117.9 PK			1.14 H	267	120.0	-2.1
4	*2417.00	105.8 AV			1.14 H	267	107.9	-2.1
5	4834.00	44.4 PK	74.0	-29.6	1.68 H	238	42.3	2.1
6	4834.00	36.2 AV	54.0	-17.8	1.68 H	238	34.1	2.1
7	7251.00	44.4 PK	74.0	-29.6	1.25 H	120	36.8	7.6
8	7251.00	36.0 AV	54.0	-18.0	1.25 H	120	28.4	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	3.50 V	137	74.0	-2.0
2	2390.00	46.9 AV	54.0	-7.1	3.50 V	137	48.9	-2.0
3	*2417.00	116.8 PK			3.50 V	137	118.9	-2.1
4	*2417.00	104.9 AV			3.50 V	137	107.0	-2.1
5	4834.00	41.0 PK	74.0	-33.0	3.19 V	76	38.9	2.1
6	4834.00	30.5 AV	54.0	-23.5	3.19 V	76	28.4	2.1
7	7251.00	41.7 PK	74.0	-32.3	1.74 V	216	34.1	7.6
8	7251.00	32.6 AV	54.0	-21.4	1.74 V	216	25.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.9 PK	74.0	-2.1	1.05 H	296	73.9	-2.0
2	2390.00	45.5 AV	54.0	-8.5	1.05 H	296	47.5	-2.0
3	*2437.00	118.6 PK			1.05 H	296	120.7	-2.1
4	*2437.00	106.5 AV			1.05 H	296	108.6	-2.1
5	2483.50	63.3 PK	74.0	-10.7	1.05 H	296	65.7	-2.4
6	2483.50	44.5 AV	54.0	-9.5	1.05 H	296	46.9	-2.4
7	4874.00	43.9 PK	74.0	-30.1	1.72 H	232	41.5	2.4
8	4874.00	36.0 AV	54.0	-18.0	1.72 H	232	33.6	2.4
9	7311.00	44.3 PK	74.0	-29.7	1.24 H	114	36.9	7.4
10	7311.00	35.9 AV	54.0	-18.1	1.24 H	114	28.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	3.05 V	135	72.2	-2.0
2	2390.00	45.4 AV	54.0	-8.6	3.05 V	135	47.4	-2.0
3	*2437.00	117.3 PK			3.05 V	135	119.4	-2.1
4	*2437.00	105.7 AV			3.05 V	135	107.8	-2.1
5	2483.50	60.2 PK	74.0	-13.8	3.05 V	135	62.6	-2.4
6	2483.50	44.3 AV	54.0	-9.7	3.05 V	135	46.7	-2.4
7	4874.00	41.5 PK	74.0	-32.5	3.23 V	83	39.1	2.4
8	4874.00	31.0 AV	54.0	-23.0	3.23 V	83	28.6	2.4
9	7311.00	42.4 PK	74.0	-31.6	1.74 V	209	35.0	7.4
10	7311.00	33.0 AV	54.0	-21.0	1.74 V	209	25.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	115.3 PK			1.04 H	295	117.7	-2.4
2	*2457.00	104.0 AV			1.04 H	295	106.4	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.04 H	295	73.6	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.04 H	295	47.8	-2.4
5	4914.00	44.7 PK	74.0	-29.3	1.69 H	239	42.2	2.5
6	4914.00	36.5 AV	54.0	-17.5	1.69 H	239	34.0	2.5
7	7371.00	44.5 PK	74.0	-29.5	1.29 H	128	36.9	7.6
8	7371.00	35.9 AV	54.0	-18.1	1.29 H	128	28.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.9 PK			2.46 V	132	115.3	-2.4
2	*2457.00	101.5 AV			2.46 V	132	103.9	-2.4
3	2483.50	68.7 PK	74.0	-5.3	2.46 V	132	71.1	-2.4
4	2483.50	44.4 AV	54.0	-9.6	2.46 V	132	46.8	-2.4
5	4914.00	41.6 PK	74.0	-32.4	3.18 V	82	39.1	2.5
6	4914.00	31.4 AV	54.0	-22.6	3.18 V	82	28.9	2.5
7	7371.00	42.3 PK	74.0	-31.7	1.75 V	219	34.7	7.6
8	7371.00	33.0 AV	54.0	-21.0	1.75 V	219	25.4	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.2 PK			1.07 H	296	118.6	-2.4
2	*2462.00	104.6 AV			1.07 H	296	107.0	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.07 H	296	74.0	-2.4
4	2483.50	45.9 AV	54.0	-8.1	1.07 H	296	48.3	-2.4
5	4924.00	43.9 PK	74.0	-30.1	1.73 H	237	41.4	2.5
6	4924.00	36.0 AV	54.0	-18.0	1.73 H	237	33.5	2.5
7	7386.00	44.7 PK	74.0	-29.3	1.29 H	139	37.0	7.7
8	7386.00	35.9 AV	54.0	-18.1	1.29 H	139	28.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.5 PK			2.94 V	132	113.9	-2.4
2	*2462.00	101.3 AV			2.94 V	132	103.7	-2.4
3	2483.50	66.1 PK	74.0	-7.9	2.94 V	132	68.5	-2.4
4	2483.50	45.1 AV	54.0	-8.9	2.94 V	132	47.5	-2.4
5	4924.00	41.1 PK	74.0	-32.9	3.17 V	96	38.6	2.5
6	4924.00	31.2 AV	54.0	-22.8	3.17 V	96	28.7	2.5
7	7386.00	41.8 PK	74.0	-32.2	1.80 V	230	34.1	7.7
8	7386.00	32.6 AV	54.0	-21.4	1.80 V	230	24.9	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.7 PK			1.06 H	295	119.1	-2.4
2	*2467.00	104.0 AV			1.06 H	295	106.4	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.06 H	295	74.1	-2.4
4	2483.50	46.7 AV	54.0	-7.3	1.06 H	295	49.1	-2.4
5	4934.00	43.9 PK	74.0	-30.1	1.74 H	235	41.5	2.4
6	4934.00	35.7 AV	54.0	-18.3	1.74 H	235	33.3	2.4
7	7401.00	44.5 PK	74.0	-29.5	1.28 H	138	36.6	7.9
8	7401.00	35.5 AV	54.0	-18.5	1.28 H	138	27.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.4 PK			2.95 V	130	114.8	-2.4
2	*2467.00	101.6 AV			2.95 V	130	104.0	-2.4
3	2483.50	68.0 PK	74.0	-6.0	2.95 V	130	70.4	-2.4
4	2483.50	45.3 AV	54.0	-8.7	2.95 V	130	47.7	-2.4
5	4934.00	41.6 PK	74.0	-32.4	3.13 V	80	39.2	2.4
6	4934.00	31.6 AV	54.0	-22.4	3.13 V	80	29.2	2.4
7	7401.00	41.5 PK	74.0	-32.5	1.75 V	221	33.6	7.9
8	7401.00	32.3 AV	54.0	-21.7	1.75 V	221	24.4	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.5 PK			1.05 H	295	116.9	-2.4
2	*2472.00	103.5 AV			1.05 H	295	105.9	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.05 H	295	73.6	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.05 H	295	52.7	-2.4
5	4944.00	44.1 PK	74.0	-29.9	1.69 H	238	41.7	2.4
6	4944.00	36.2 AV	54.0	-17.8	1.69 H	238	33.8	2.4
7	7416.00	44.5 PK	74.0	-29.5	1.28 H	152	36.5	8.0
8	7416.00	35.3 AV	54.0	-18.7	1.28 H	152	27.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	111.1 PK			2.97 V	131	113.5	-2.4
2	*2472.00	100.1 AV			2.97 V	131	102.5	-2.4
3	2483.50	63.3 PK	74.0	-10.7	2.97 V	131	65.7	-2.4
4	2483.50	47.0 AV	54.0	-7.0	2.97 V	131	49.4	-2.4
5	4944.00	41.2 PK	74.0	-32.8	3.14 V	87	38.8	2.4
6	4944.00	31.4 AV	54.0	-22.6	3.14 V	87	29.0	2.4
7	7416.00	41.8 PK	74.0	-32.2	1.76 V	231	33.8	8.0
8	7416.00	32.4 AV	54.0	-21.6	1.76 V	231	24.4	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.13 H	269	74.4	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.13 H	269	48.3	-2.0
3	*2412.00	112.3 PK			1.13 H	269	114.4	-2.1
4	*2412.00	101.2 AV			1.13 H	269	103.3	-2.1
5	4824.00	43.6 PK	74.0	-30.4	1.62 H	234	41.5	2.1
6	4824.00	35.3 AV	54.0	-18.7	1.62 H	234	33.2	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.6 PK	74.0	-10.4	2.68 V	130	65.6	-2.0
2	2390.00	45.6 AV	54.0	-8.4	2.68 V	130	47.6	-2.0
3	*2412.00	111.3 PK			2.68 V	130	113.4	-2.1
4	*2412.00	99.6 AV			2.68 V	130	101.7	-2.1
5	4824.00	41.3 PK	74.0	-32.7	3.47 V	124	39.2	2.1
6	4824.00	30.6 AV	54.0	-23.4	3.47 V	124	28.5	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.14 H	267	74.4	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.14 H	267	48.5	-2.0
3	*2417.00	114.5 PK			1.14 H	267	116.6	-2.1
4	*2417.00	103.0 AV			1.14 H	267	105.1	-2.1
5	4834.00	43.6 PK	74.0	-30.4	1.62 H	234	41.5	2.1
6	4834.00	35.3 AV	54.0	-18.7	1.62 H	234	33.2	2.1
7	7251.00	45.6 PK	74.0	-28.4	1.15 H	127	38.0	7.6
8	7251.00	37.2 AV	54.0	-16.8	1.15 H	127	29.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	3.11 V	132	66.5	-2.0
2	2390.00	46.0 AV	54.0	-8.0	3.11 V	132	48.0	-2.0
3	*2417.00	112.3 PK			3.11 V	132	114.4	-2.1
4	*2417.00	101.4 AV			3.11 V	132	103.5	-2.1
5	4834.00	41.4 PK	74.0	-32.6	3.46 V	117	39.3	2.1
6	4834.00	30.5 AV	54.0	-23.5	3.46 V	117	28.4	2.1
7	7251.00	41.7 PK	74.0	-32.3	1.71 V	188	34.1	7.6
8	7251.00	32.1 AV	54.0	-21.9	1.71 V	188	24.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.08 H	266	73.0	-2.0
2	2390.00	45.5 AV	54.0	-8.5	1.08 H	266	47.5	-2.0
3	*2437.00	115.6 PK			1.08 H	266	117.7	-2.1
4	*2437.00	104.0 AV			1.08 H	266	106.1	-2.1
5	2483.50	64.5 PK	74.0	-9.5	1.08 H	266	66.9	-2.4
6	2483.50	44.5 AV	54.0	-9.5	1.08 H	266	46.9	-2.4
7	4874.00	43.4 PK	74.0	-30.6	1.67 H	244	41.0	2.4
8	4874.00	35.4 AV	54.0	-18.6	1.67 H	244	33.0	2.4
9	7311.00	45.1 PK	74.0	-28.9	1.32 H	131	37.7	7.4
10	7311.00	36.9 AV	54.0	-17.1	1.32 H	131	29.5	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.0 PK	74.0	-9.0	3.06 V	140	67.0	-2.0
2	2390.00	52.3 AV	54.0	-1.7	3.06 V	140	54.3	-2.0
3	*2437.00	114.4 PK			3.06 V	140	116.5	-2.1
4	*2437.00	102.6 AV			3.06 V	140	104.7	-2.1
5	2483.50	45.0 PK	74.0	-29.0	3.06 V	140	47.4	-2.4
6	2483.50	44.6 AV	54.0	-9.4	3.06 V	140	47.0	-2.4
7	4874.00	41.6 PK	74.0	-32.4	3.15 V	118	39.2	2.4
8	4874.00	30.9 AV	54.0	-23.1	3.15 V	118	28.5	2.4
9	7311.00	41.9 PK	74.0	-32.1	1.71 V	184	34.5	7.4
10	7311.00	32.5 AV	54.0	-21.5	1.71 V	184	25.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.5 PK			1.05 H	296	116.9	-2.4
2	*2457.00	102.4 AV			1.05 H	296	104.8	-2.4
3	2483.50	71.9 PK	74.0	-2.1	1.05 H	296	74.3	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.05 H	296	47.8	-2.4
5	4914.00	43.4 PK	74.0	-30.6	1.65 H	230	40.9	2.5
6	4914.00	35.7 AV	54.0	-18.3	1.65 H	230	33.2	2.5
7	7371.00	45.1 PK	74.0	-28.9	1.26 H	135	37.5	7.6
8	7371.00	36.7 AV	54.0	-17.3	1.26 H	135	29.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	111.0 PK			3.37 V	131	113.4	-2.4
2	*2457.00	99.6 AV			3.37 V	131	102.0	-2.4
3	2483.50	63.4 PK	74.0	-10.6	3.37 V	131	65.8	-2.4
4	2483.50	44.5 AV	54.0	-9.5	3.37 V	131	46.9	-2.4
5	4914.00	41.3 PK	74.0	-32.7	3.13 V	110	38.8	2.5
6	4914.00	30.6 AV	54.0	-23.4	3.13 V	110	28.1	2.5
7	7371.00	41.6 PK	74.0	-32.4	1.68 V	186	34.0	7.6
8	7371.00	32.3 AV	54.0	-21.7	1.68 V	186	24.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.9 PK			1.06 H	295	116.3	-2.4
2	*2462.00	102.0 AV			1.06 H	295	104.4	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.06 H	295	74.8	-2.4
4	2483.50	47.5 AV	54.0	-6.5	1.06 H	295	49.9	-2.4
5	4924.00	43.8 PK	74.0	-30.2	1.64 H	226	41.3	2.5
6	4924.00	35.9 AV	54.0	-18.1	1.64 H	226	33.4	2.5
7	7386.00	44.8 PK	74.0	-29.2	1.29 H	134	37.1	7.7
8	7386.00	36.5 AV	54.0	-17.5	1.29 H	134	28.8	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.8 PK			2.68 V	142	113.2	-2.4
2	*2462.00	99.2 AV			2.68 V	142	101.6	-2.4
3	2483.50	66.2 PK	74.0	-7.8	2.68 V	142	68.6	-2.4
4	2483.50	46.3 AV	54.0	-7.7	2.68 V	142	48.7	-2.4
5	4924.00	41.2 PK	74.0	-32.8	3.18 V	99	38.7	2.5
6	4924.00	30.6 AV	54.0	-23.4	3.18 V	99	28.1	2.5
7	7386.00	41.5 PK	74.0	-32.5	1.70 V	186	33.8	7.7
8	7386.00	32.0 AV	54.0	-22.0	1.70 V	186	24.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.6 PK			1.06 H	296	113.0	-2.4
2	*2467.00	100.2 AV			1.06 H	296	102.6	-2.4
3	2483.50	71.9 PK	74.0	-2.1	1.06 H	296	74.3	-2.4
4	2483.50	47.0 AV	54.0	-7.0	1.06 H	296	49.4	-2.4
5	4934.00	43.9 PK	74.0	-30.1	1.66 H	223	41.5	2.4
6	4934.00	35.9 AV	54.0	-18.1	1.66 H	223	33.5	2.4
7	7401.00	44.8 PK	74.0	-29.2	1.34 H	122	36.9	7.9
8	7401.00	36.7 AV	54.0	-17.3	1.34 H	122	28.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	108.7 PK			3.21 V	142	111.1	-2.4
2	*2467.00	97.8 AV			3.21 V	142	100.2	-2.4
3	2483.50	57.6 PK	74.0	-16.4	3.21 V	142	60.0	-2.4
4	2483.50	45.3 AV	54.0	-8.7	3.21 V	142	47.7	-2.4
5	4934.00	40.8 PK	74.0	-33.2	3.17 V	85	38.4	2.4
6	4934.00	30.4 AV	54.0	-23.6	3.17 V	85	28.0	2.4
7	7401.00	41.7 PK	74.0	-32.3	1.74 V	194	33.8	7.9
8	7401.00	32.4 AV	54.0	-21.6	1.74 V	194	24.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 72% RH
Tested By	Vanness Huang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.2 PK			1.05 H	294	114.6	-2.4
2	*2472.00	99.8 AV			1.05 H	294	102.2	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.05 H	294	74.1	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.05 H	294	53.6	-2.4
5	4944.00	44.1 PK	74.0	-29.9	1.72 H	223	41.7	2.4
6	4944.00	35.8 AV	54.0	-18.2	1.72 H	223	33.4	2.4
7	7416.00	44.7 PK	74.0	-29.3	1.31 H	126	36.7	8.0
8	7416.00	36.4 AV	54.0	-17.6	1.31 H	126	28.4	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	109.2 PK			3.60 V	140	111.6	-2.4
2	*2472.00	97.6 AV			3.60 V	140	100.0	-2.4
3	2483.50	66.4 PK	74.0	-7.6	3.60 V	140	68.8	-2.4
4	2483.50	47.9 AV	54.0	-6.1	3.60 V	140	50.3	-2.4
5	4944.00	41.0 PK	74.0	-33.0	3.19 V	90	38.6	2.4
6	4944.00	30.7 AV	54.0	-23.3	3.19 V	90	28.3	2.4
7	7416.00	41.7 PK	74.0	-32.3	1.71 V	201	33.7	8.0
8	7416.00	32.6 AV	54.0	-21.4	1.71 V	201	24.6	8.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

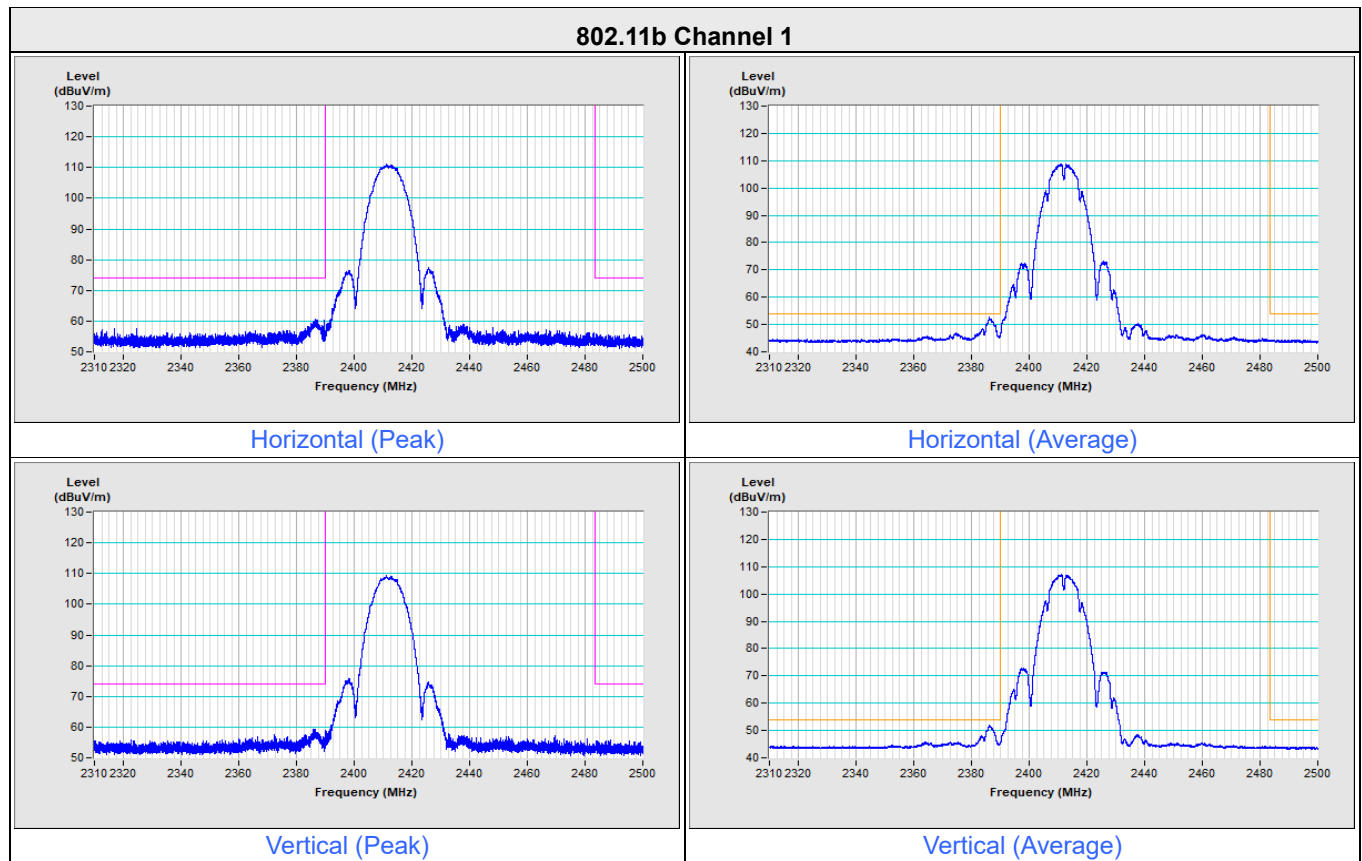


802.11b Channel 2

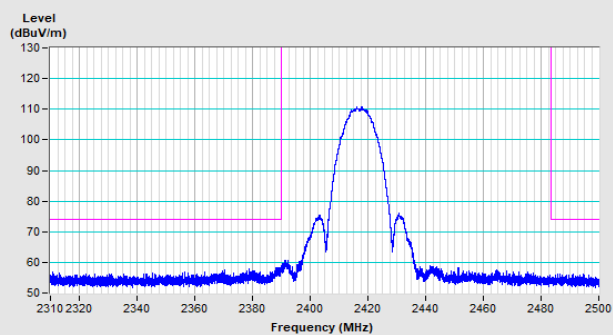


Horizontal (Peak)

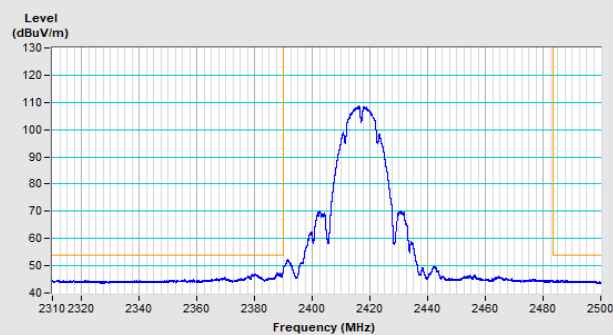

Horizontal (Average)

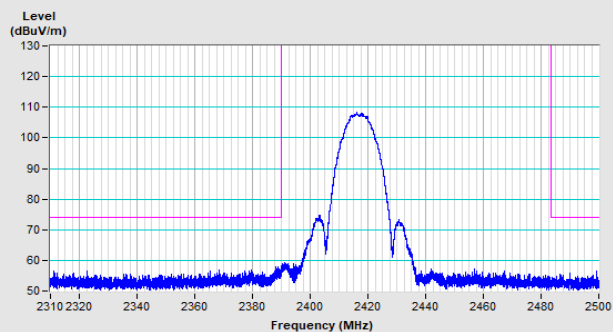


Vertical (Peak)

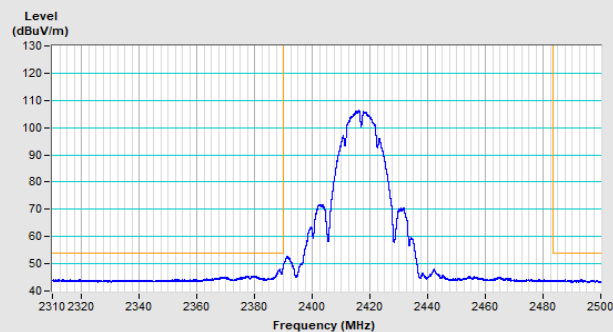


Vertical (Average)


802.11b Channel 10

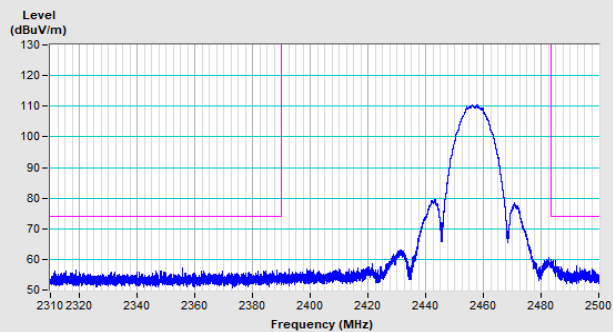


Horizontal (Peak)

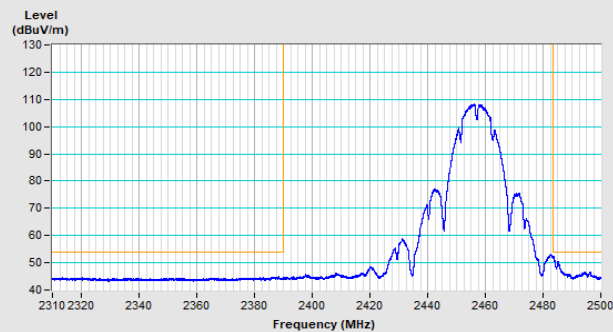

Horizontal (Average)

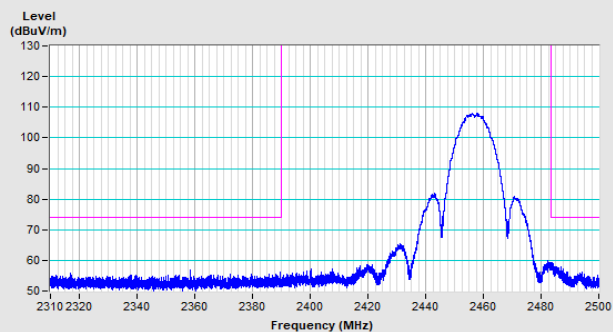


Vertical (Peak)

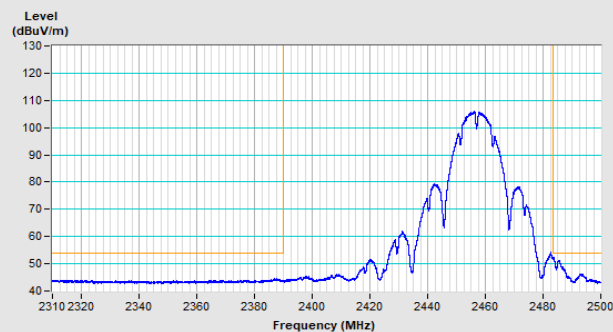


Vertical (Average)


802.11b Channel 11

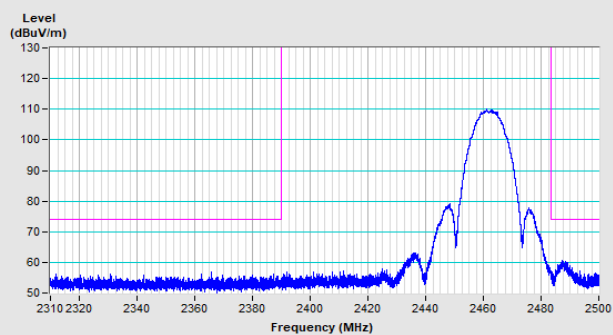


Horizontal (Peak)

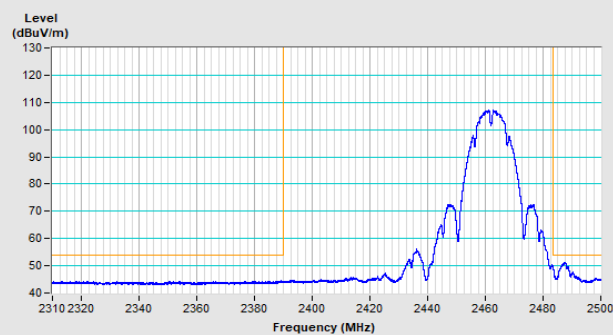

Horizontal (Average)

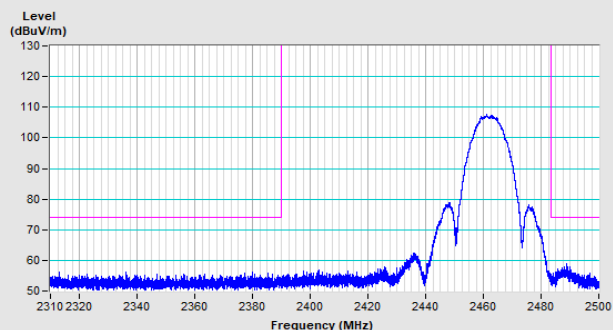


Vertical (Peak)

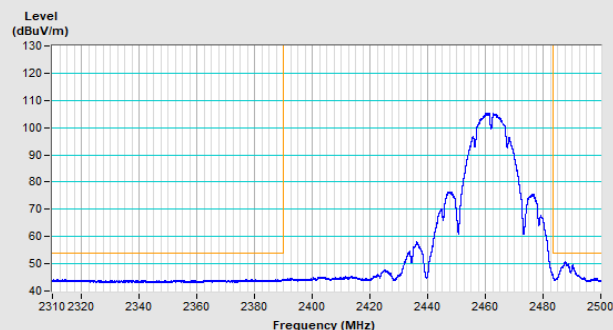


Vertical (Average)


802.11b Channel 12

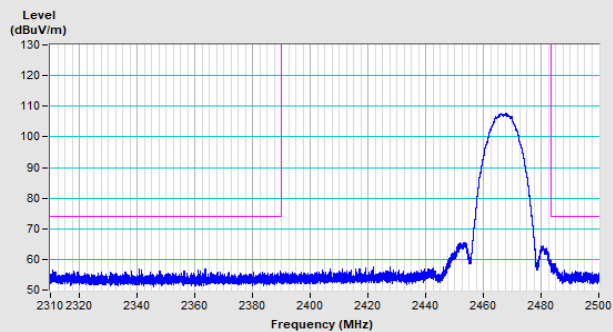


Horizontal (Peak)

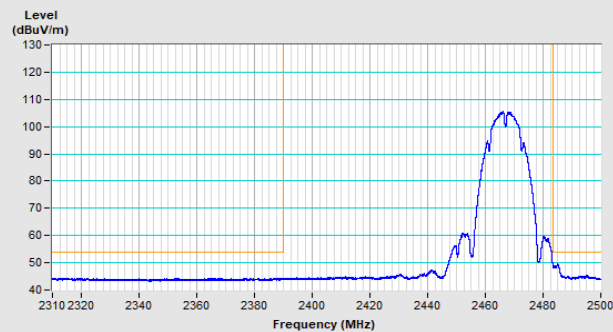

Horizontal (Average)

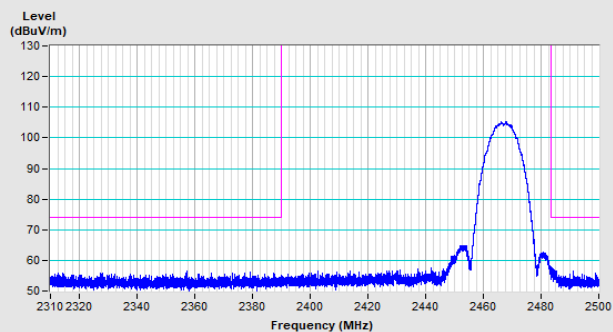


Vertical (Peak)

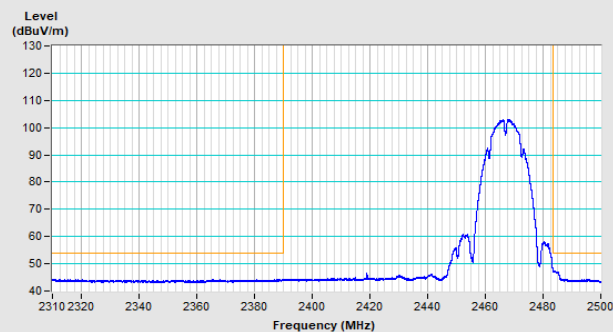


Vertical (Average)


802.11b Channel 13

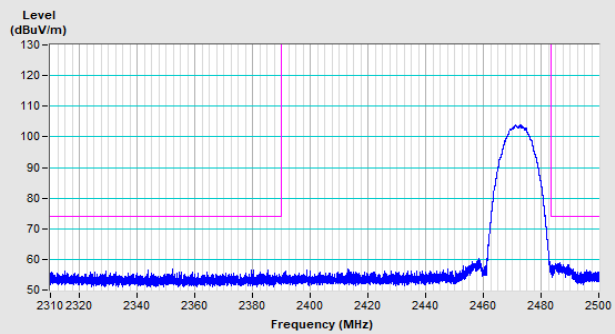


Horizontal (Peak)

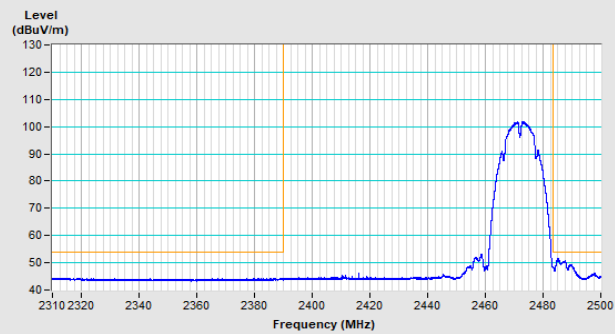

Horizontal (Average)

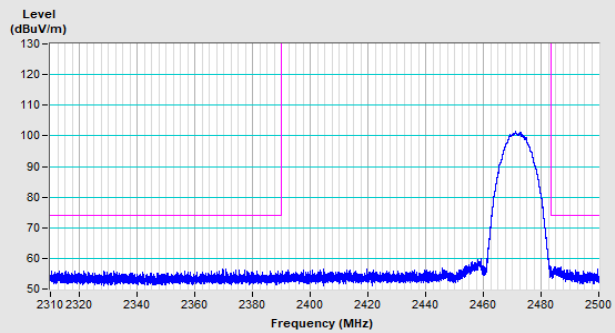


Vertical (Peak)

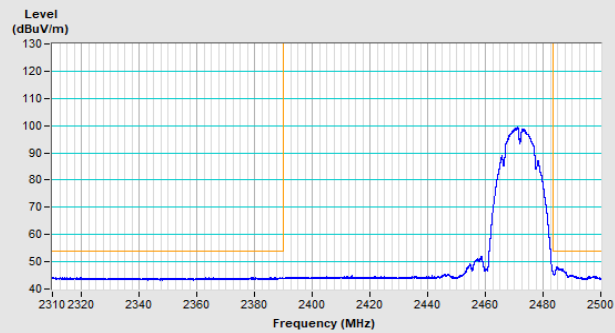


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

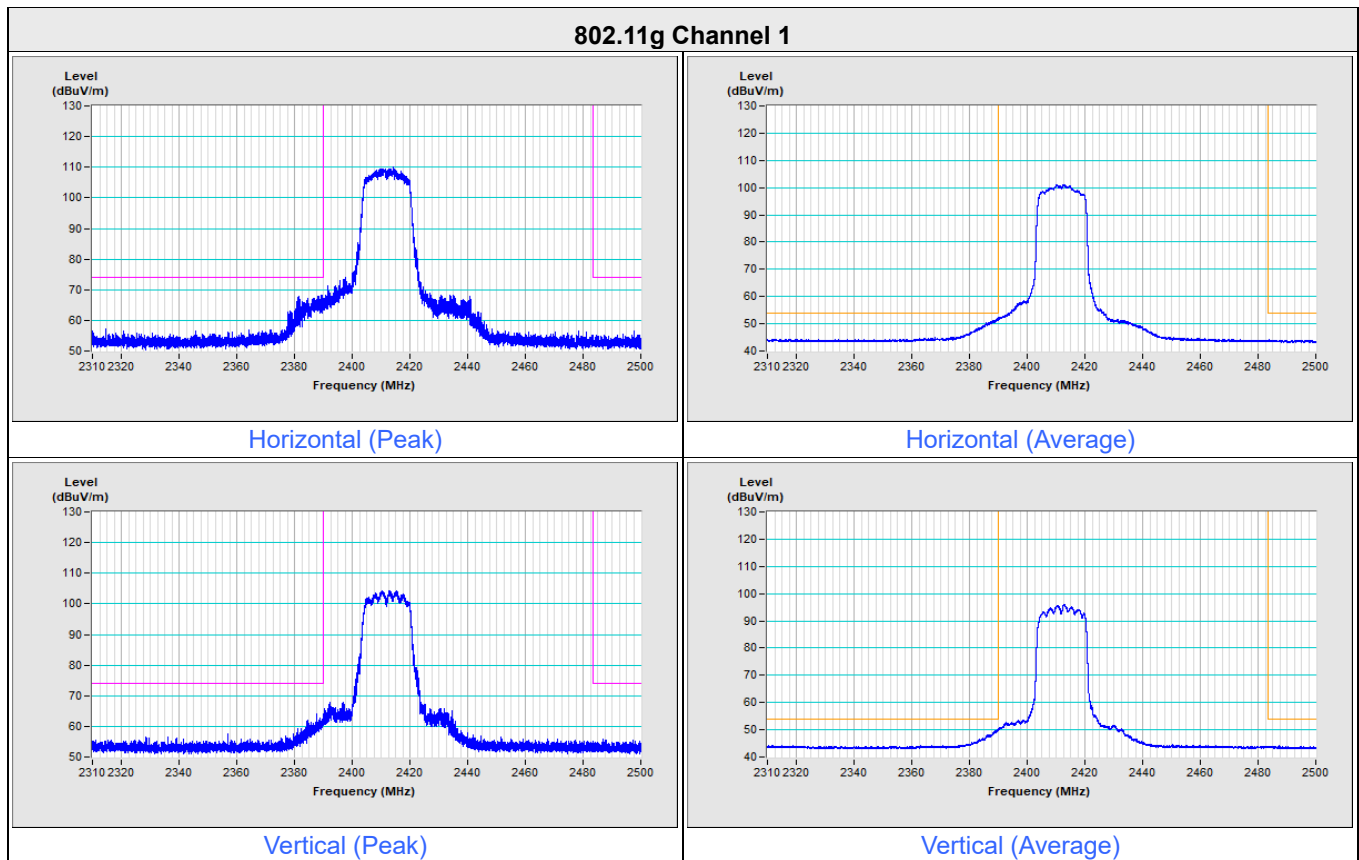


802.11g Channel 2

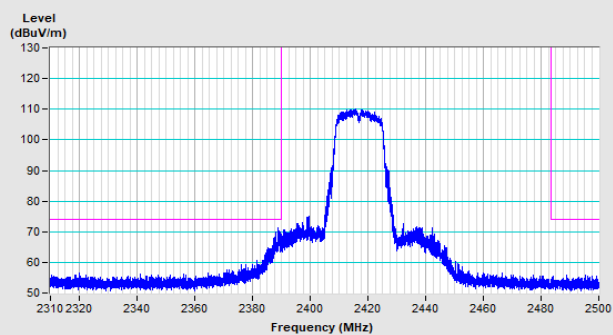


Horizontal (Peak)

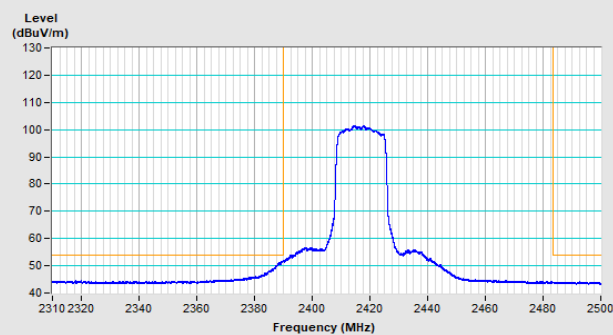

Horizontal (Average)

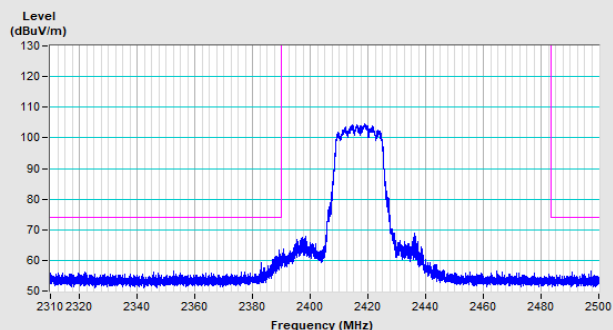


Vertical (Peak)

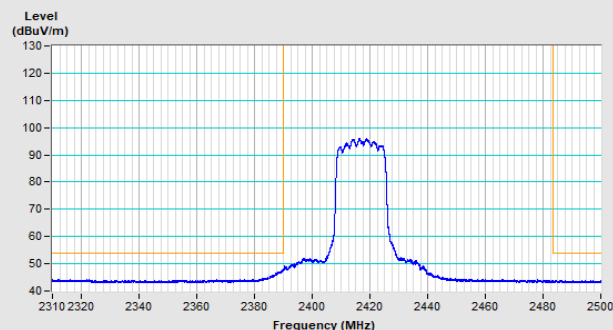


Vertical (Average)


802.11g Channel 10

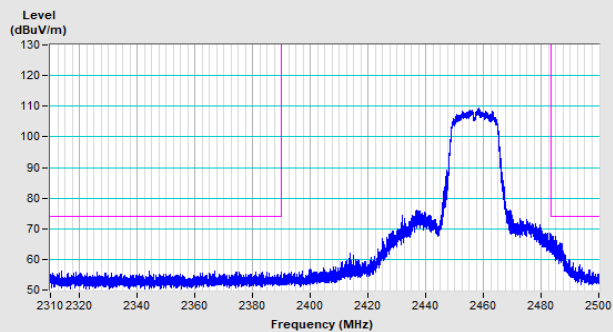


Horizontal (Peak)

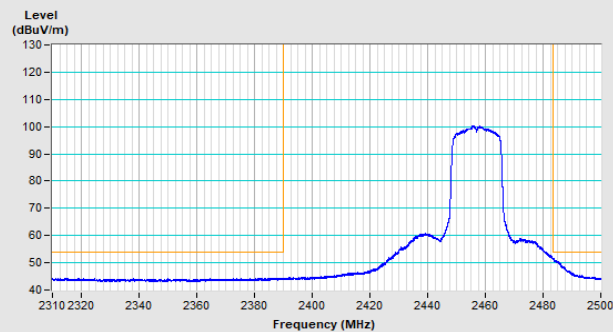

Horizontal (Average)

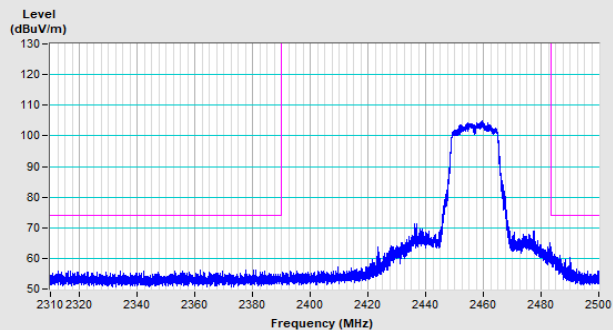


Vertical (Peak)

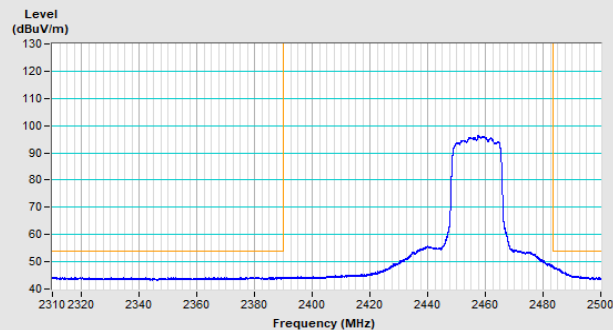


Vertical (Average)


802.11g Channel 11

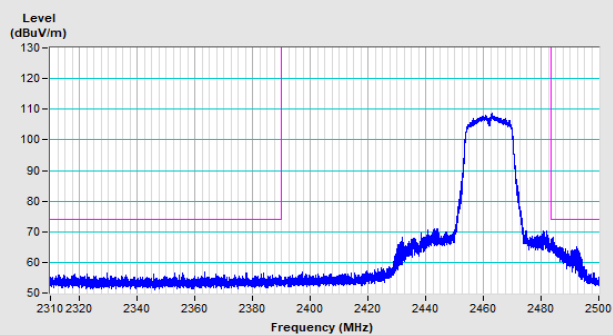


Horizontal (Peak)

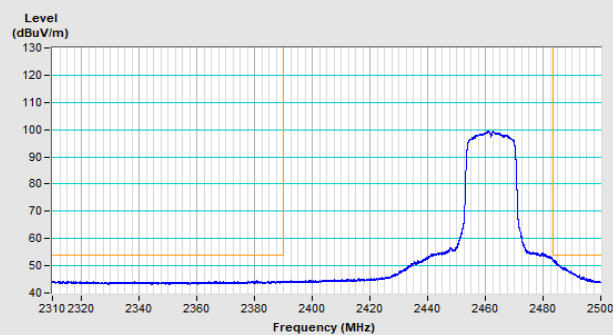

Horizontal (Average)

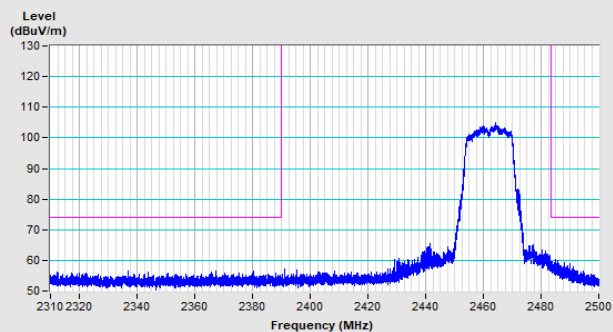


Vertical (Peak)

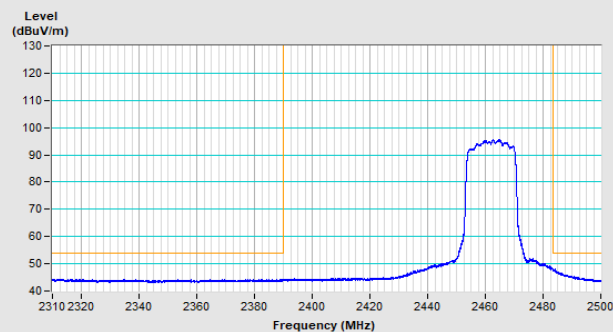


Vertical (Average)


802.11g Channel 12

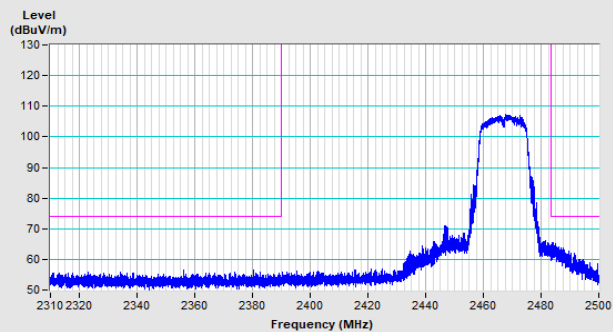


Horizontal (Peak)

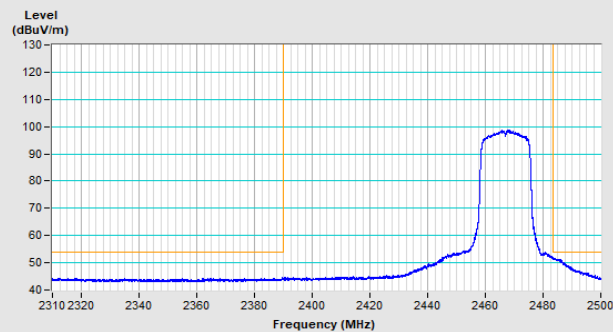

Horizontal (Average)

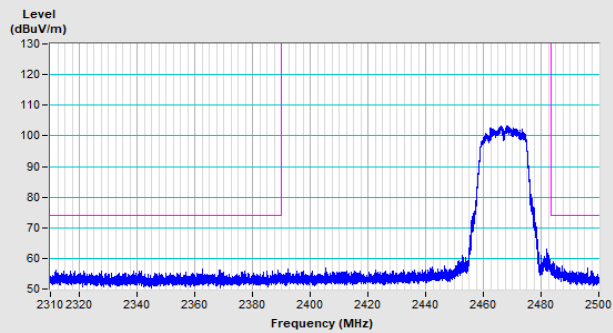


Vertical (Peak)

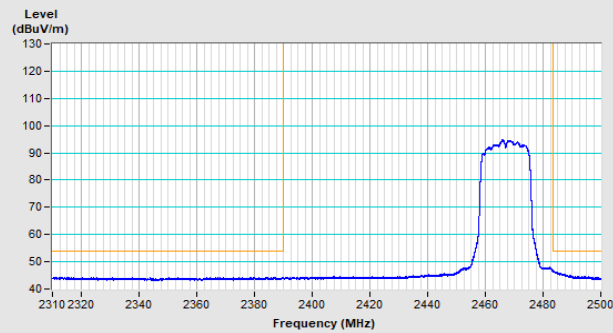


Vertical (Average)


802.11g Channel 13

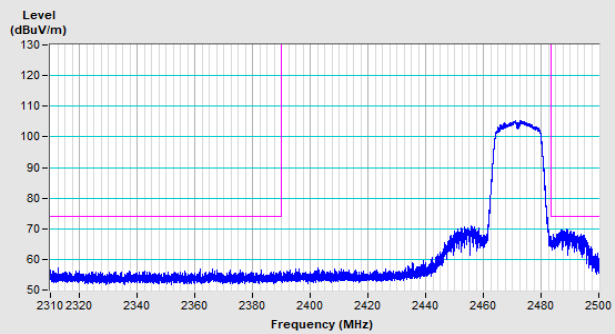


Horizontal (Peak)

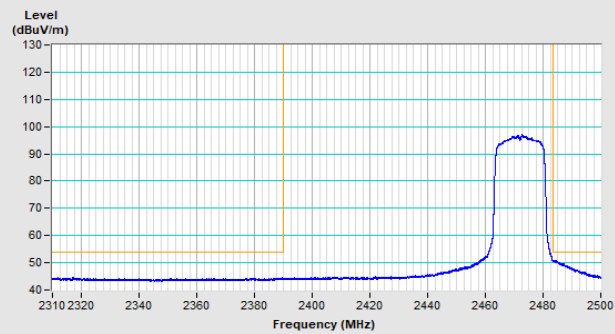

Horizontal (Average)

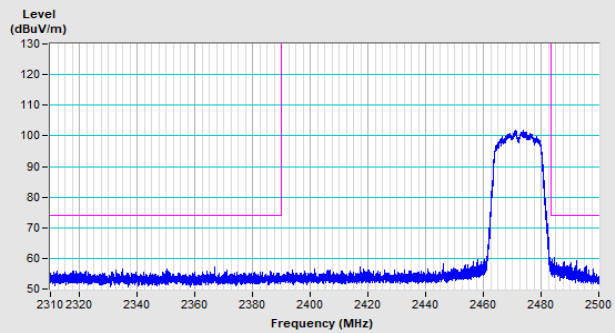


Vertical (Peak)

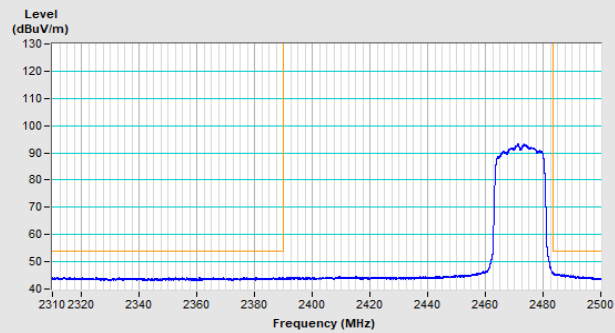


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 1

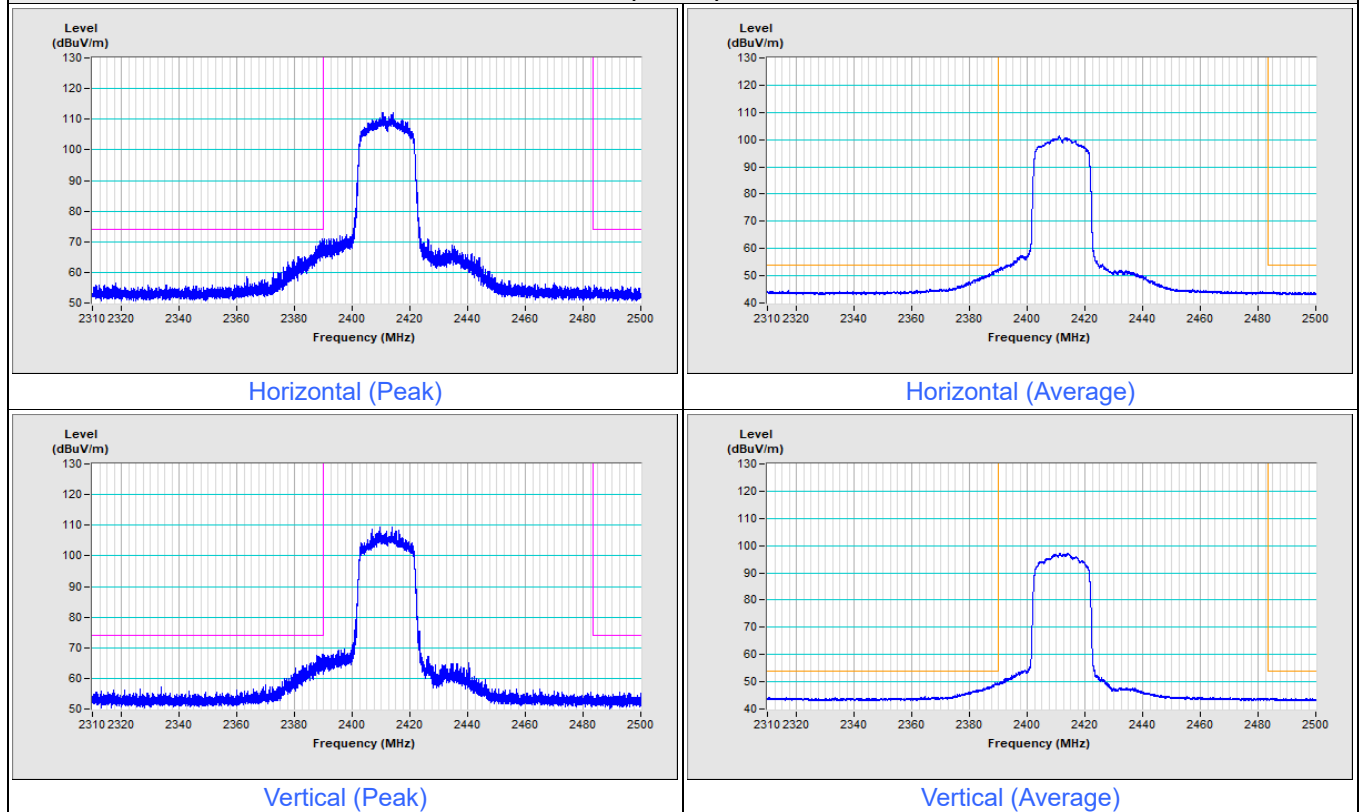


802.11be (EHT20) Channel 2

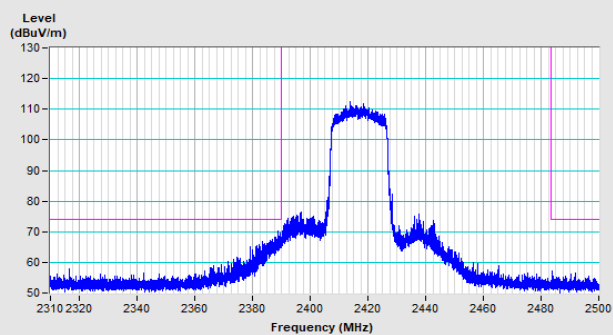


Horizontal (Peak)

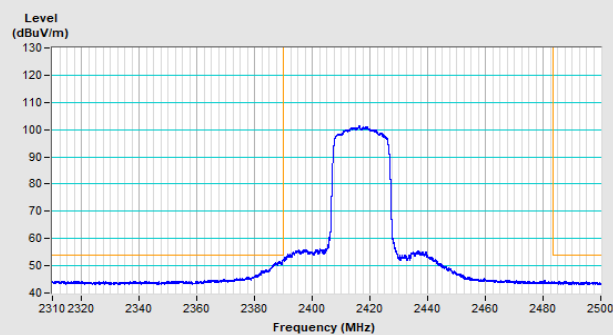

Horizontal (Average)

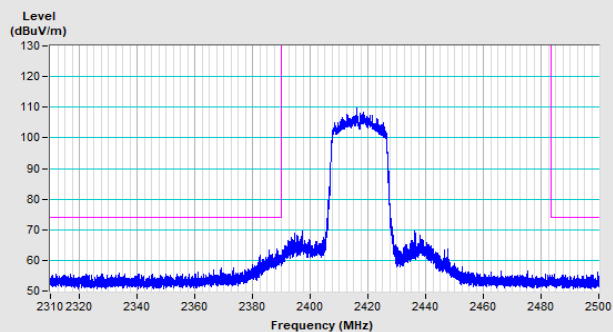


Vertical (Peak)

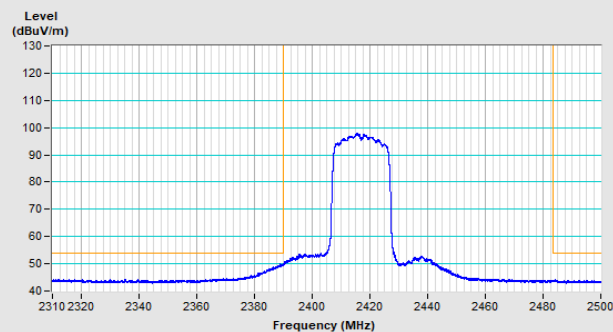


Vertical (Average)


802.11be (EHT20) Channel 10

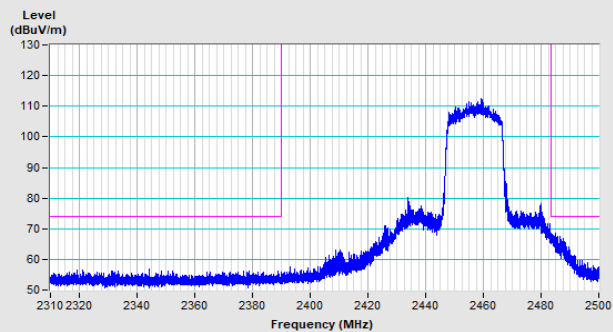


Horizontal (Peak)

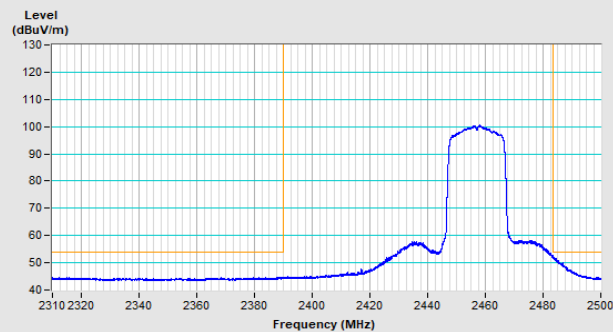

Horizontal (Average)

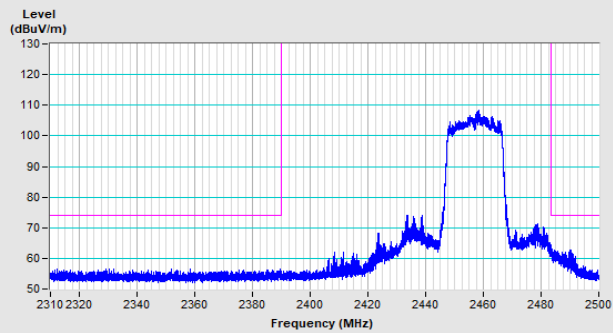


Vertical (Peak)

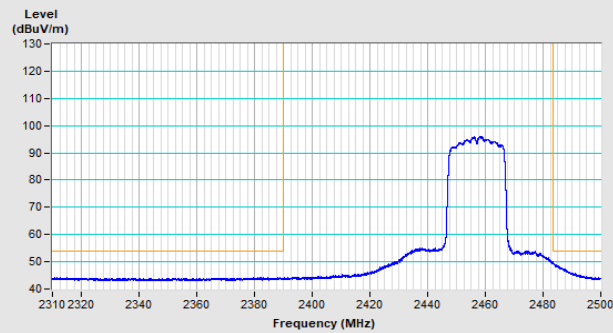


Vertical (Average)


802.11be (EHT20) Channel 11

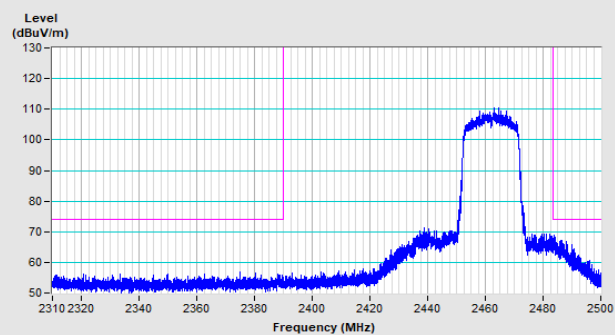


Horizontal (Peak)

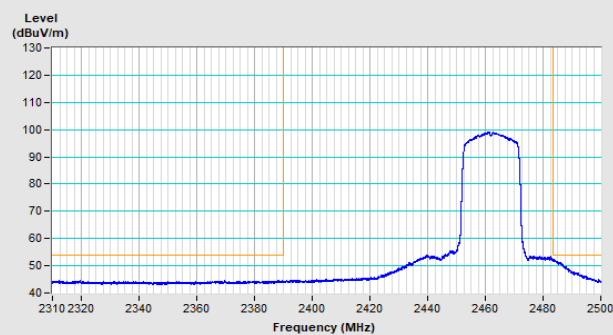

Horizontal (Average)

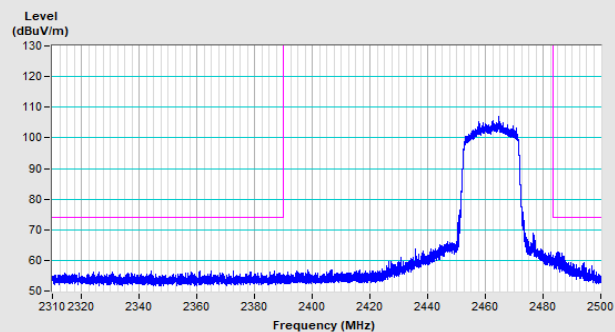


Vertical (Peak)

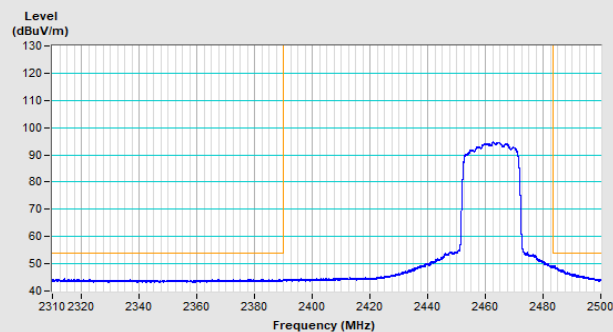


Vertical (Average)


802.11be (EHT20) Channel 12

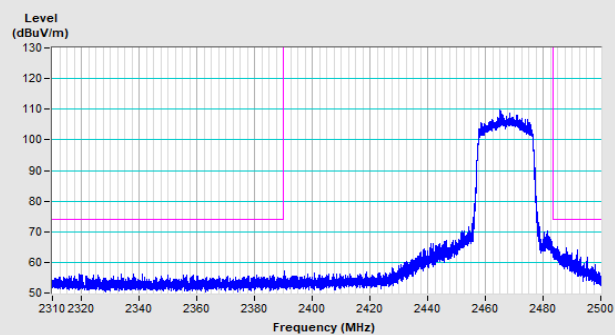


Horizontal (Peak)

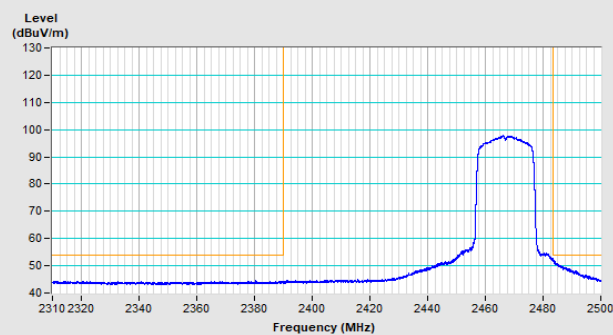

Horizontal (Average)

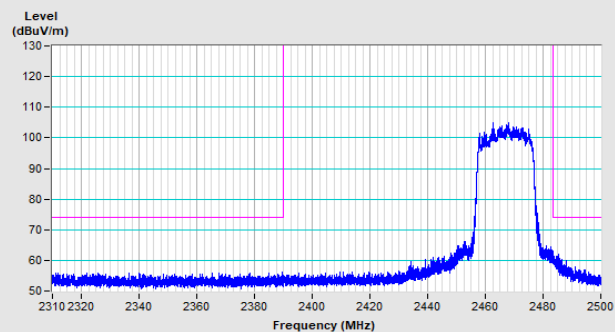


Vertical (Peak)

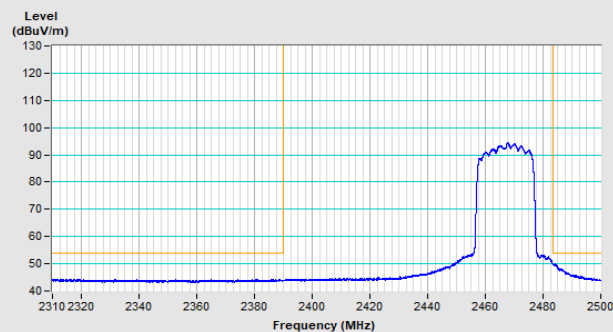


Vertical (Average)


802.11be (EHT20) Channel 13

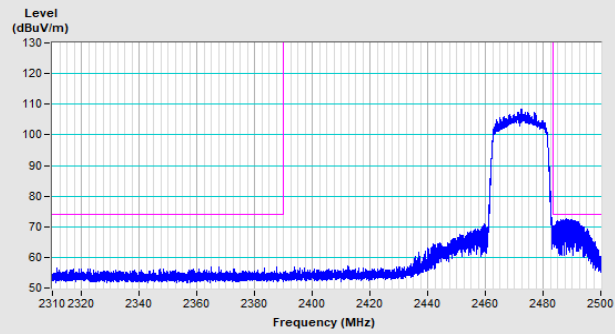


Horizontal (Peak)

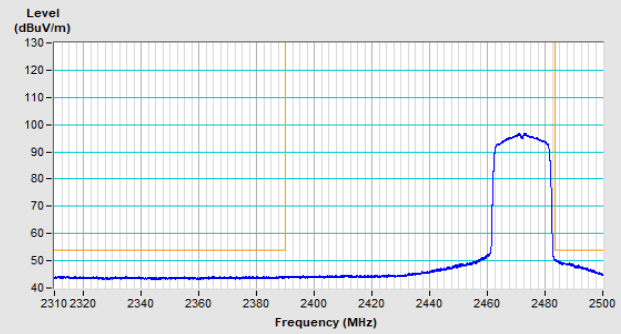

Horizontal (Average)

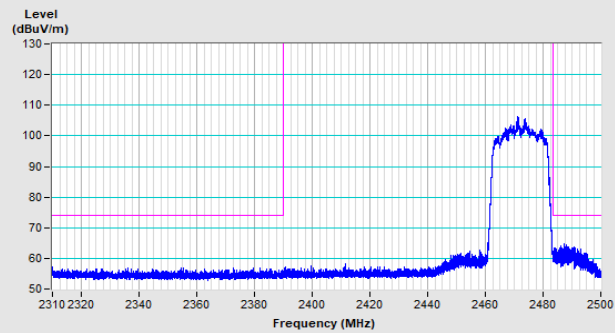


Vertical (Peak)

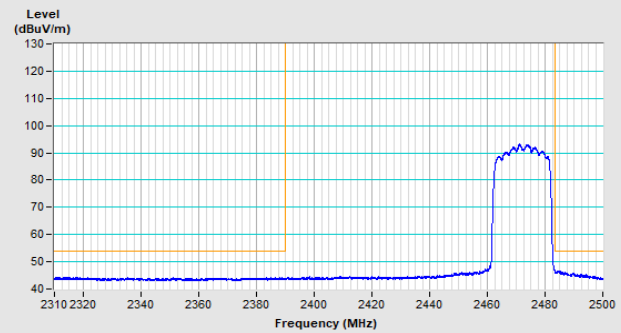


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

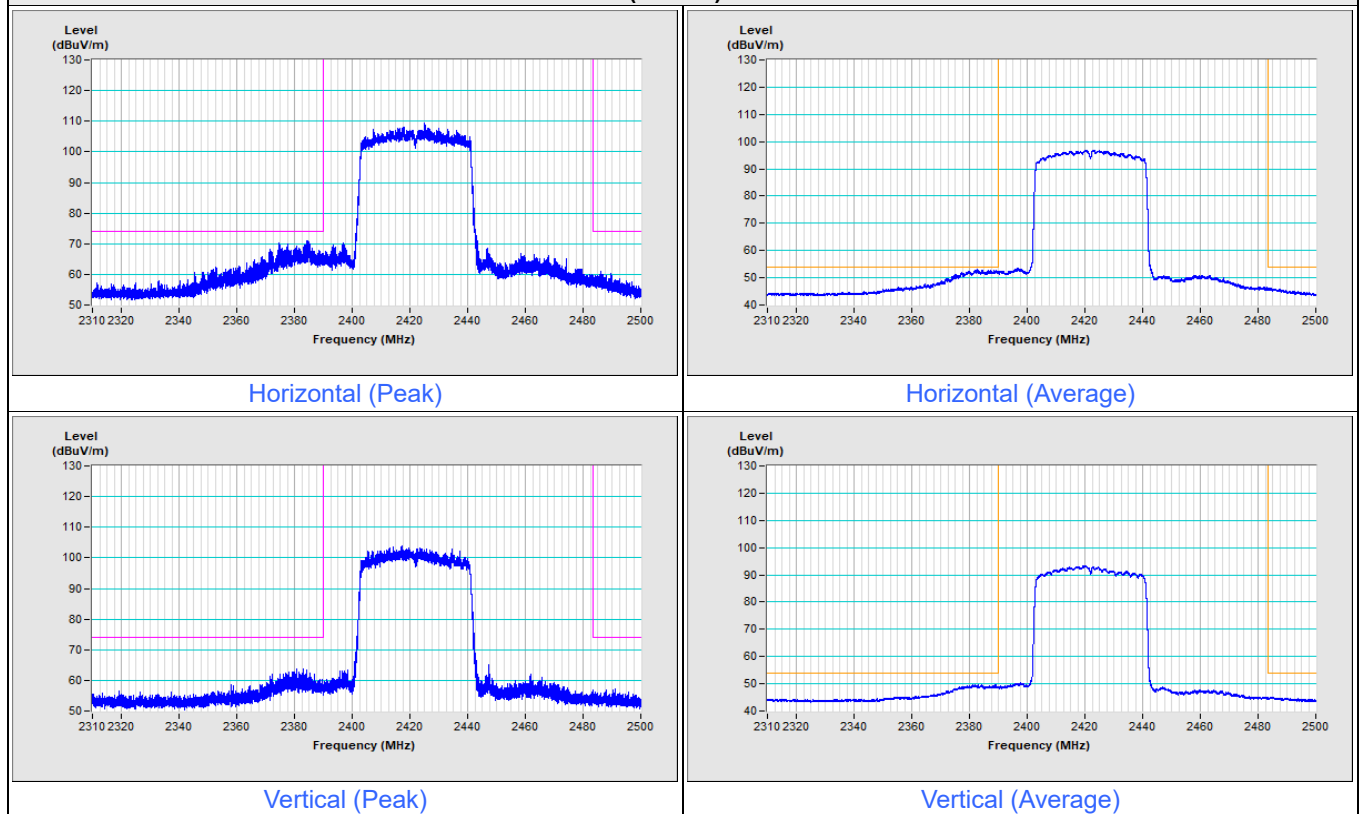


802.11be (EHT40) Channel 9

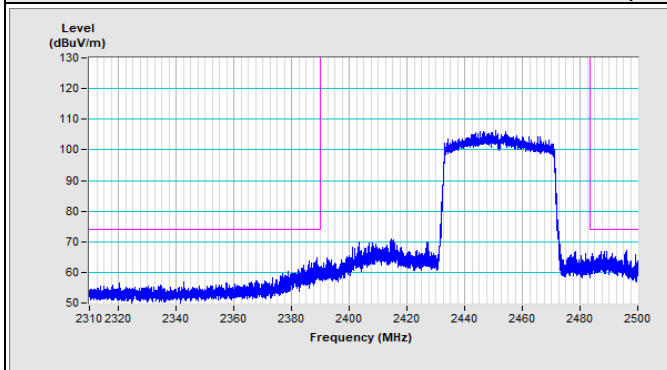


Horizontal (Peak)

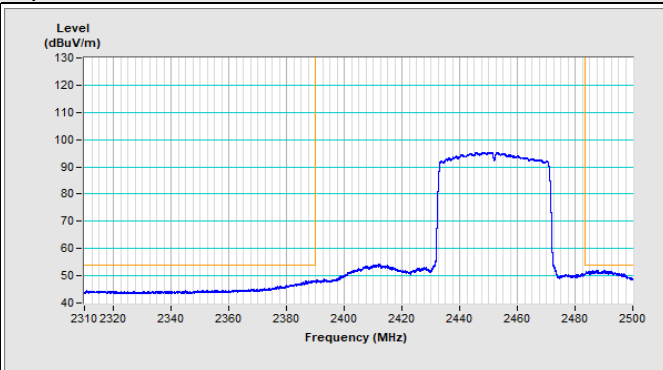

Horizontal (Average)

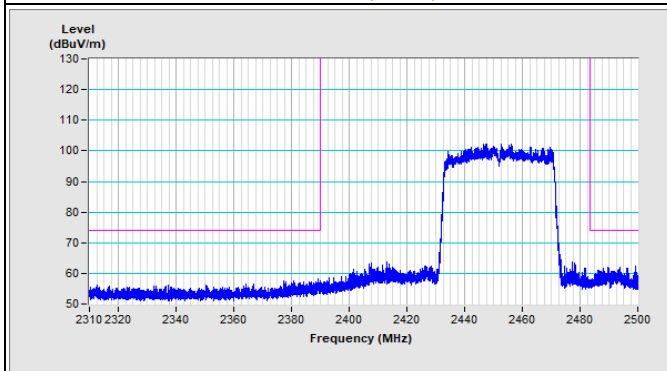


Vertical (Peak)

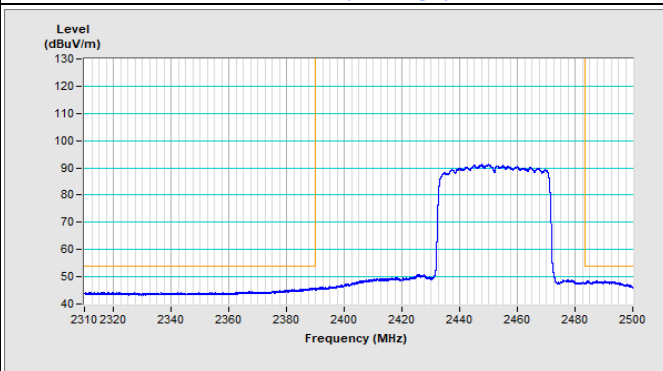


Vertical (Average)


802.11be (EHT40) Channel 10

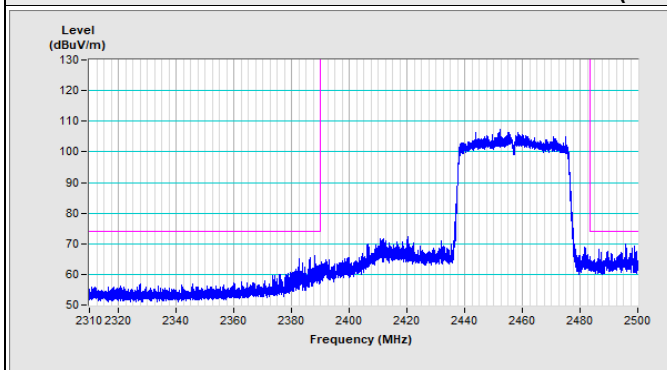


Horizontal (Peak)

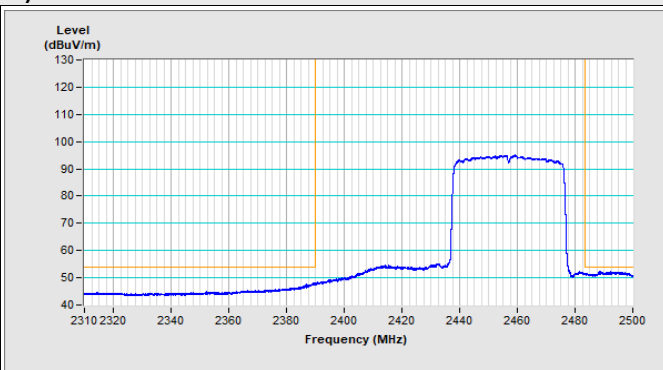

Horizontal (Average)

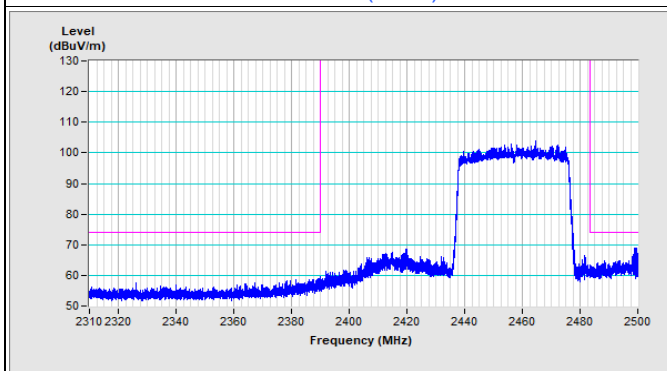


Vertical (Peak)

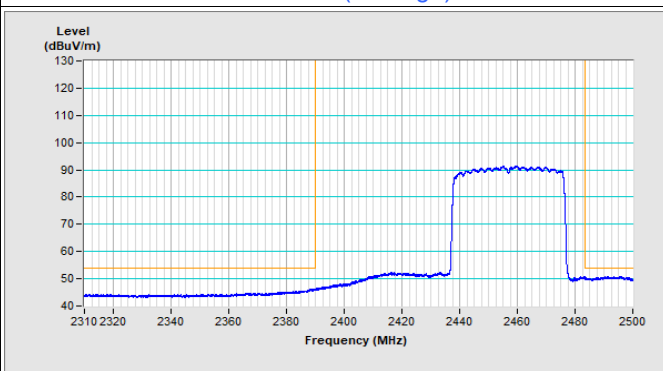


Vertical (Average)


802.11be (EHT40) Channel 11

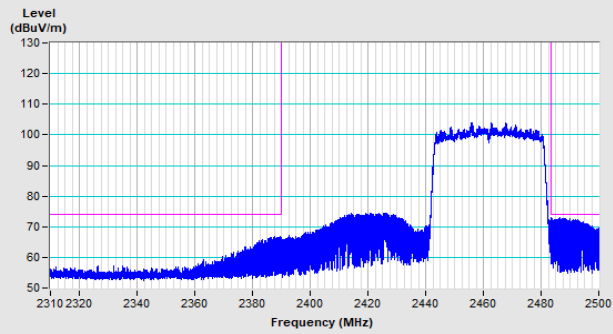


Horizontal (Peak)

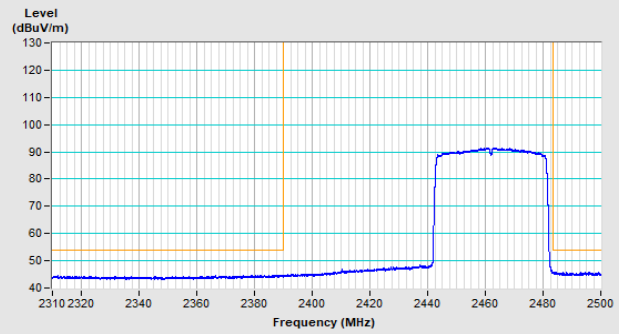

Horizontal (Average)

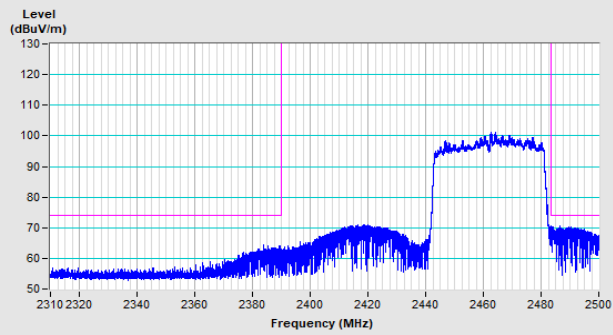


Vertical (Peak)

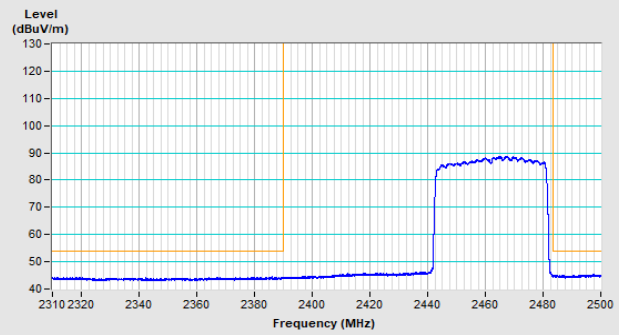


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

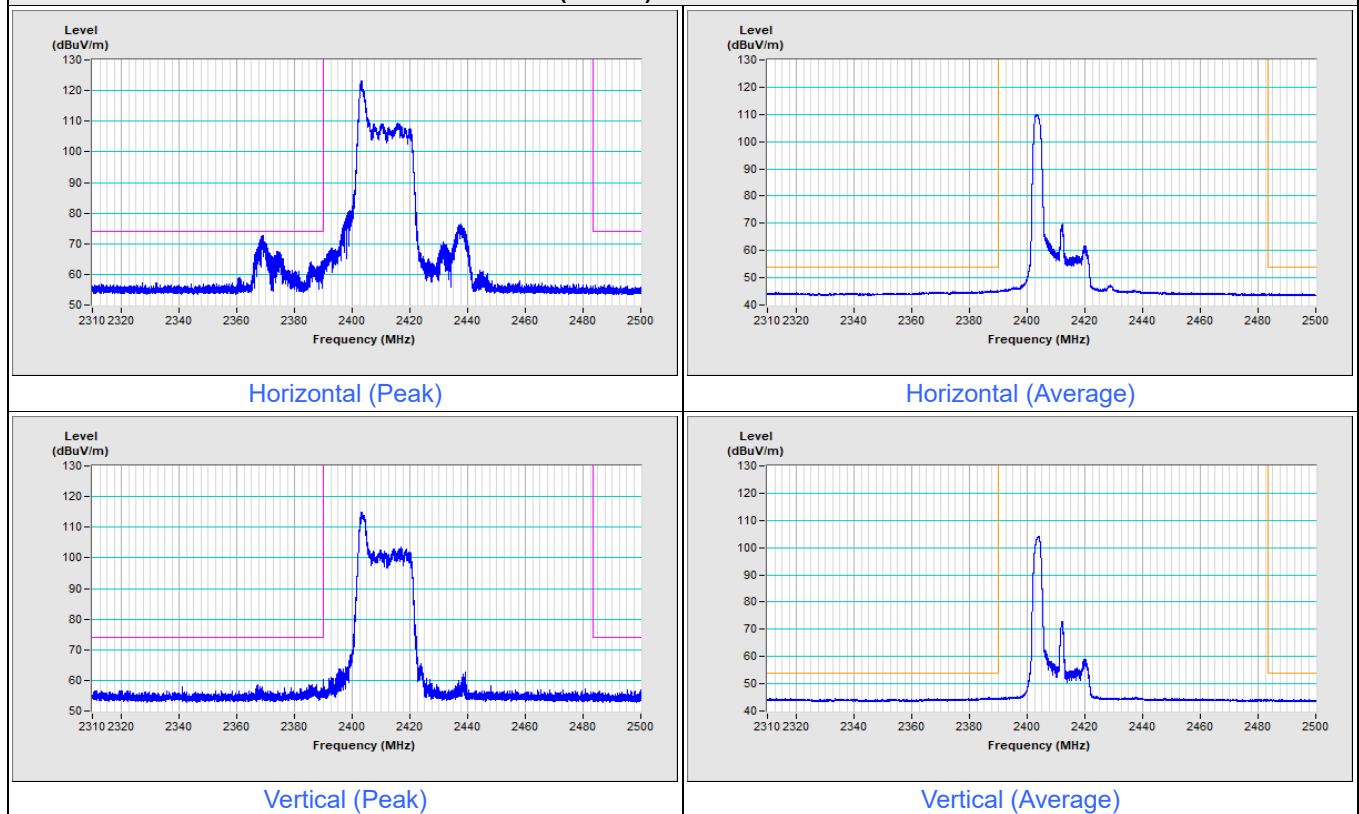


802.11be (EHT20) 26-tone RU Channel 2

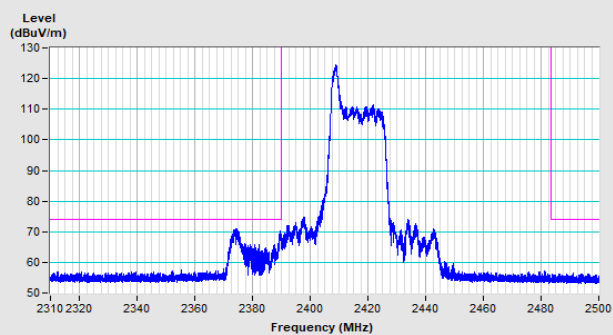


Horizontal (Peak)

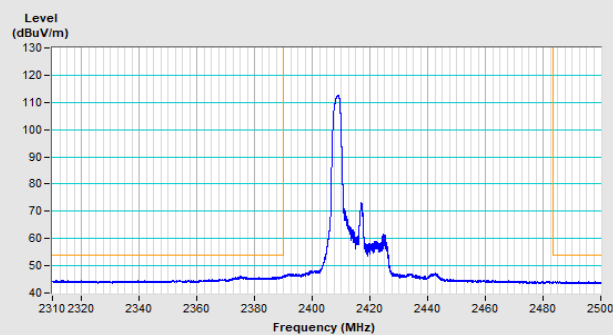

Horizontal (Average)

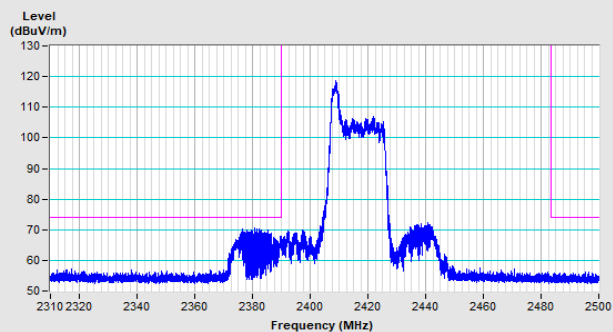


Vertical (Peak)

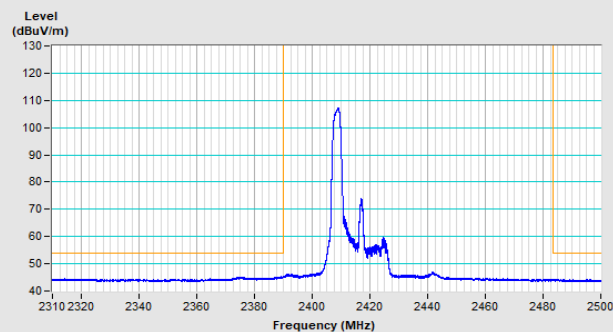


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 10

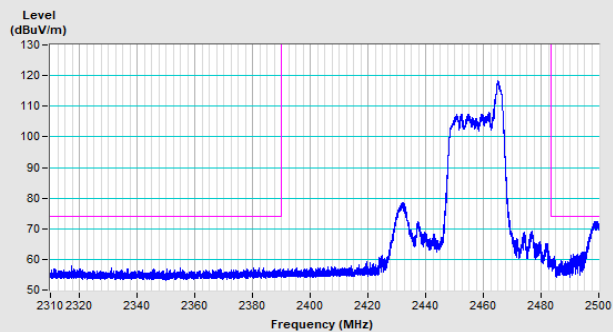


Horizontal (Peak)

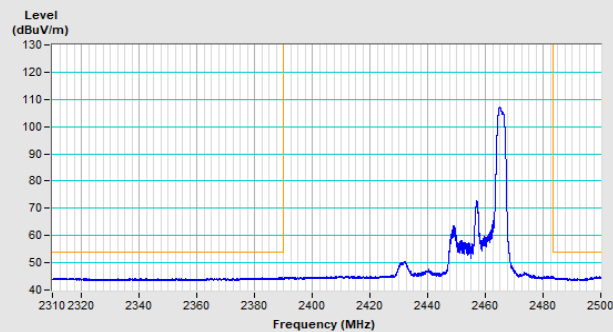

Horizontal (Average)

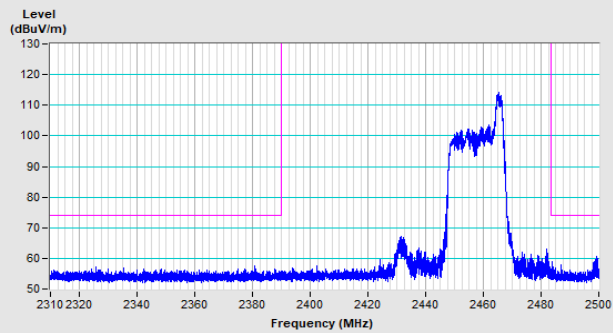


Vertical (Peak)

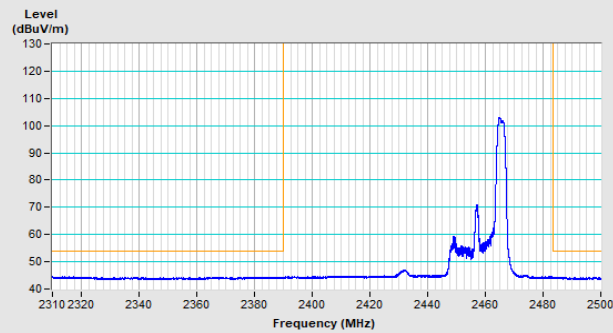


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 11

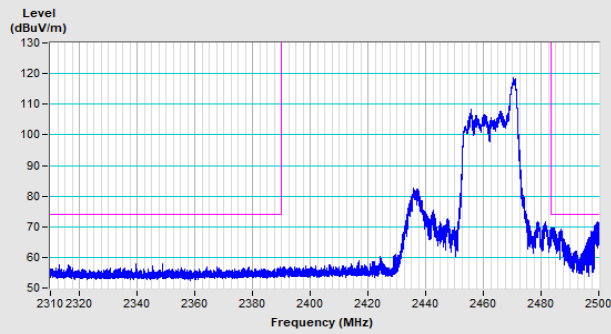


Horizontal (Peak)

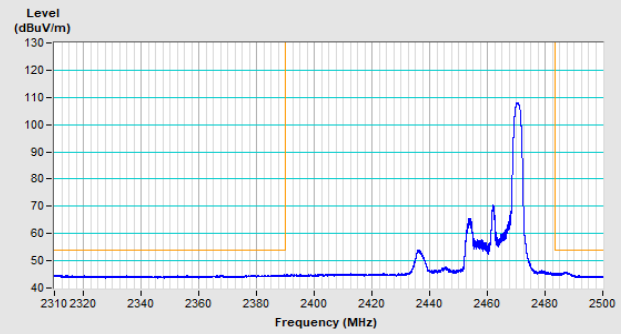

Horizontal (Average)

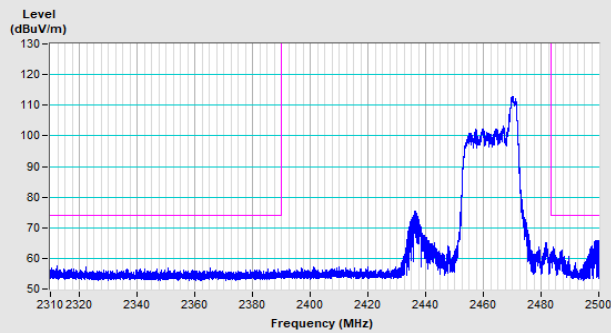


Vertical (Peak)

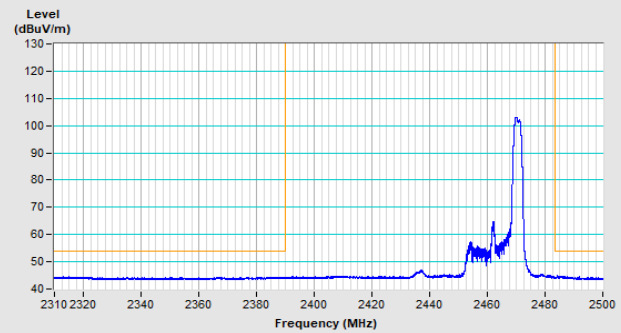


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

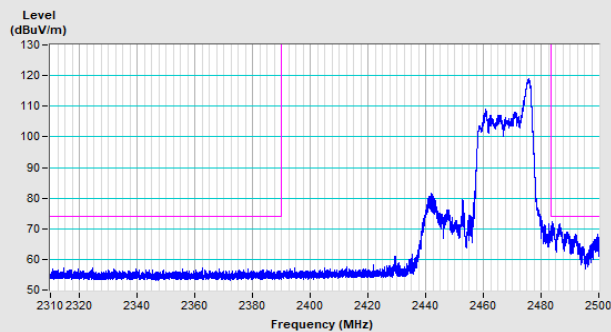


Horizontal (Peak)

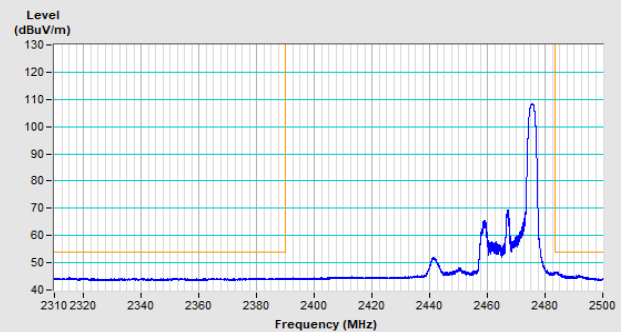


Horizontal (Average)

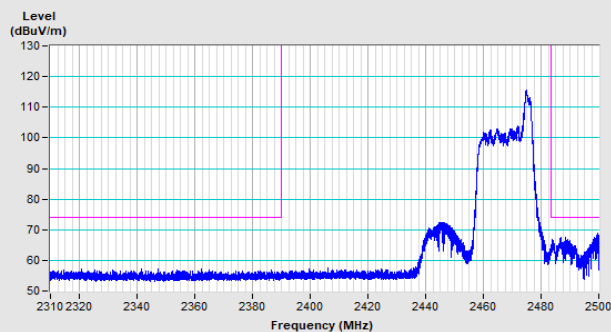


Vertical (Peak)

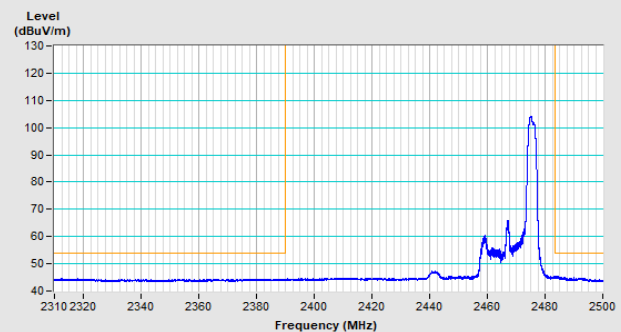


Vertical (Average)

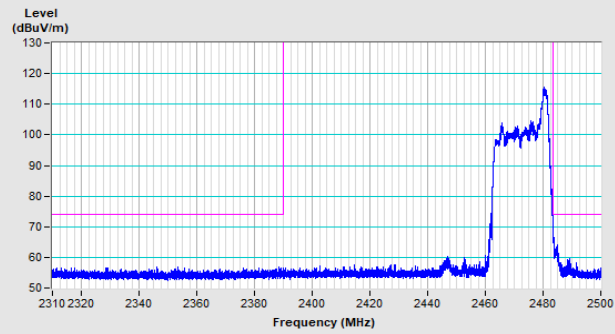802.11be (EHT20) 26-tone RU Channel 13


Horizontal (Peak)

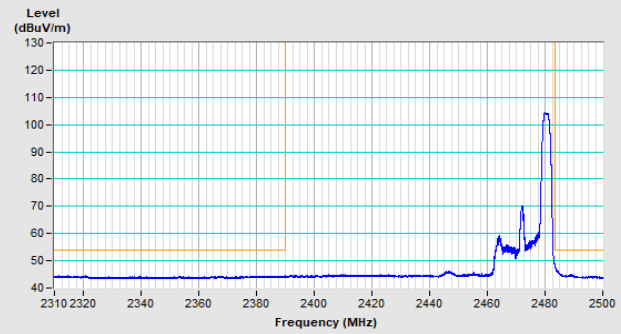

Horizontal (Average)

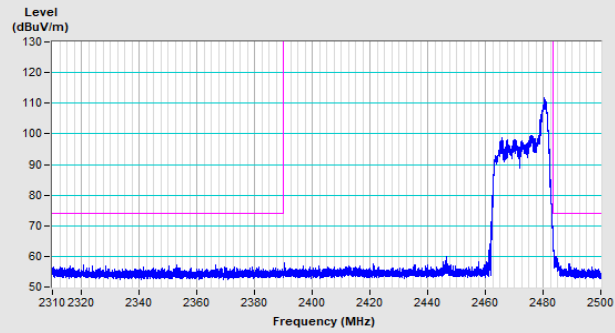


Vertical (Peak)

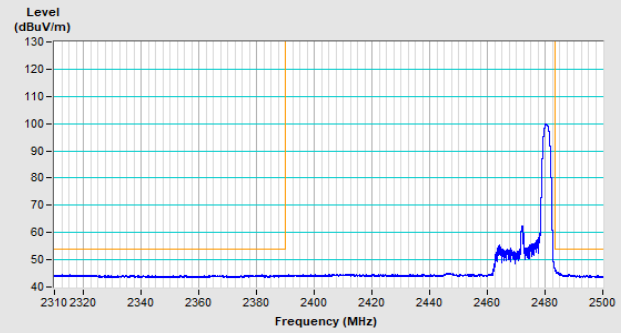


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

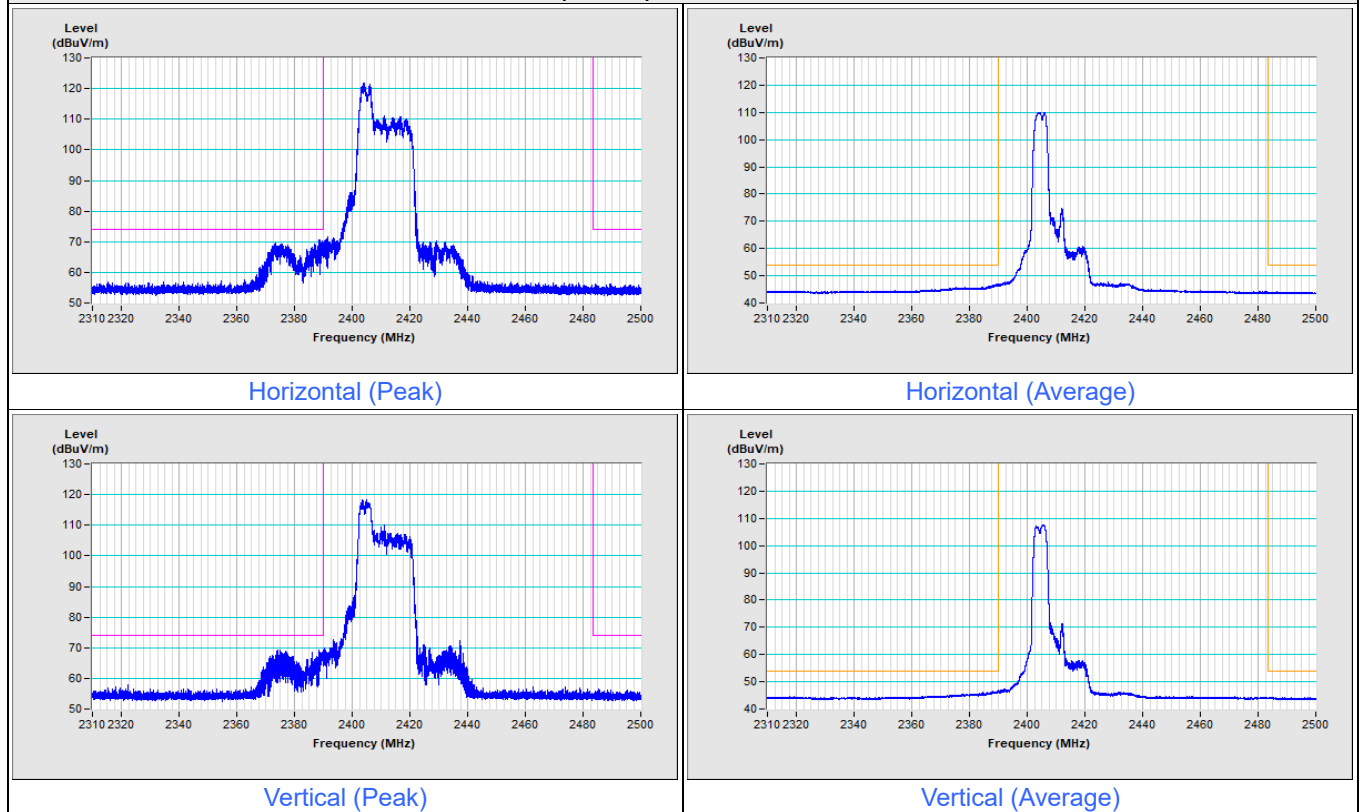


802.11be (EHT20) 52-tone RU Channel 2

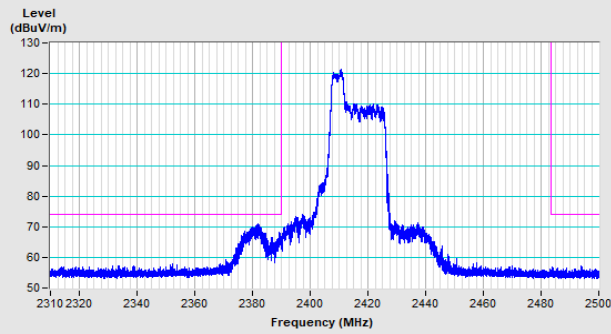


Horizontal (Peak)

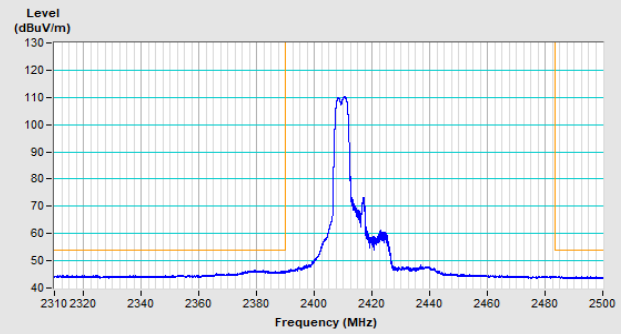

Horizontal (Average)

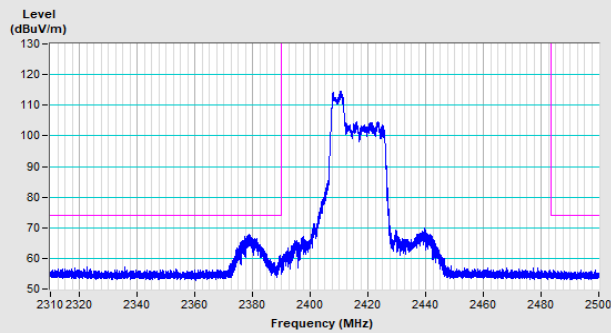


Vertical (Peak)

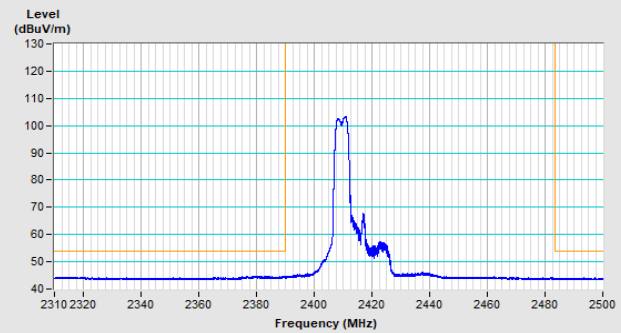


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 10

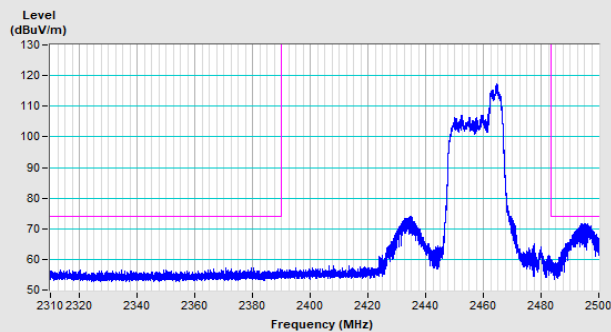


Horizontal (Peak)

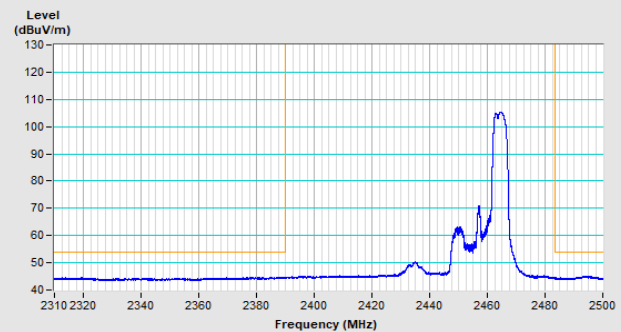

Horizontal (Average)

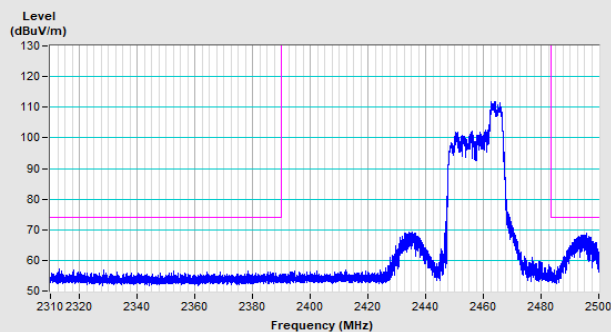


Vertical (Peak)

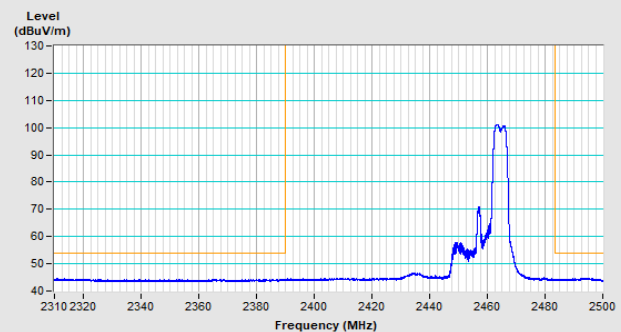


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 11

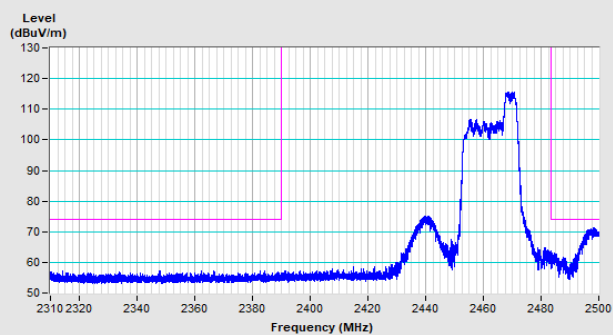


Horizontal (Peak)

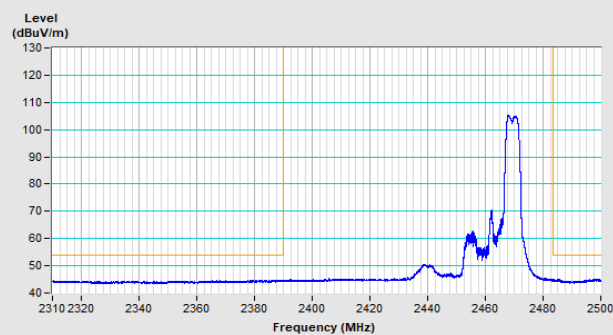

Horizontal (Average)

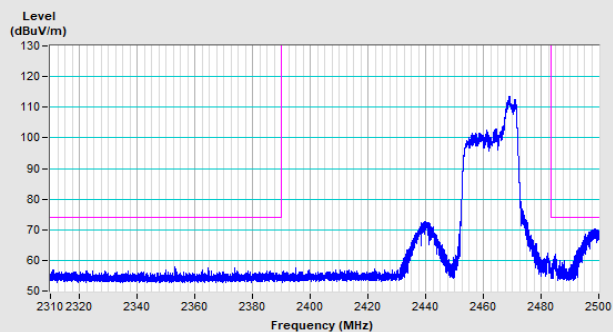


Vertical (Peak)

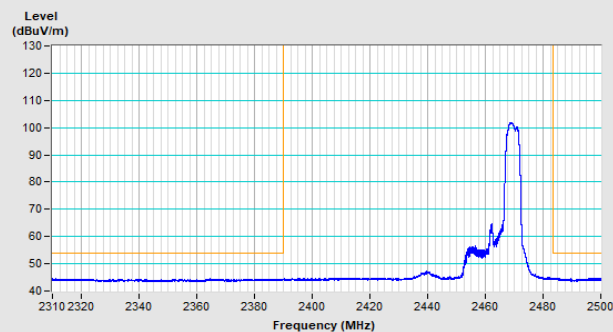


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

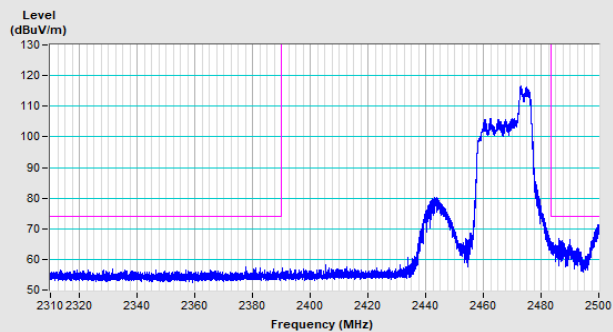


Horizontal (Peak)

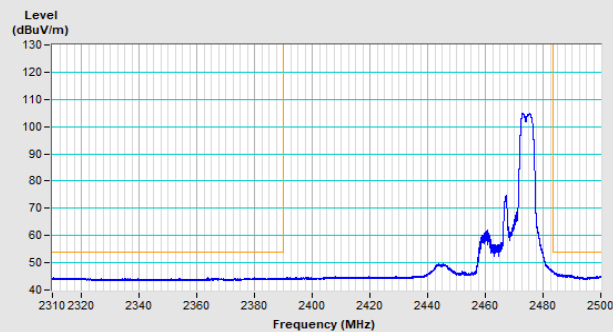

Horizontal (Average)

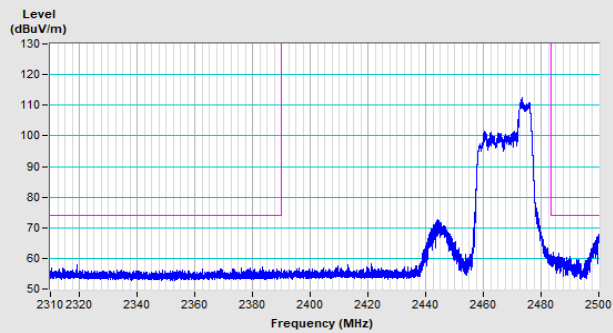


Vertical (Peak)

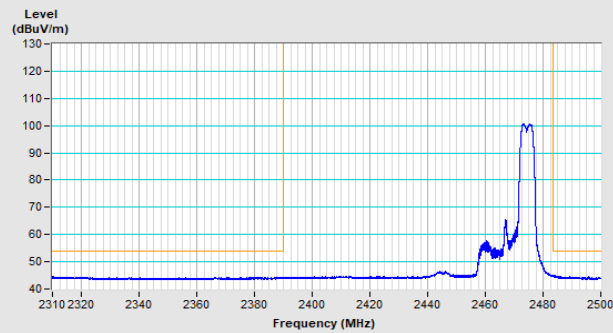


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

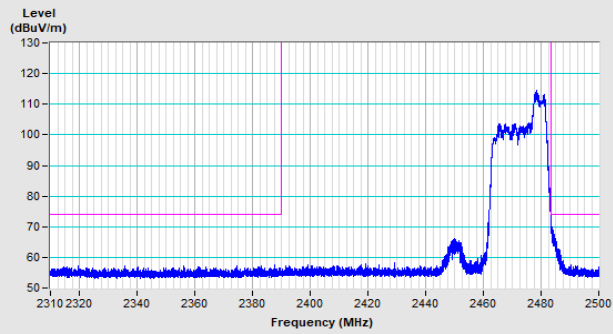


Horizontal (Peak)

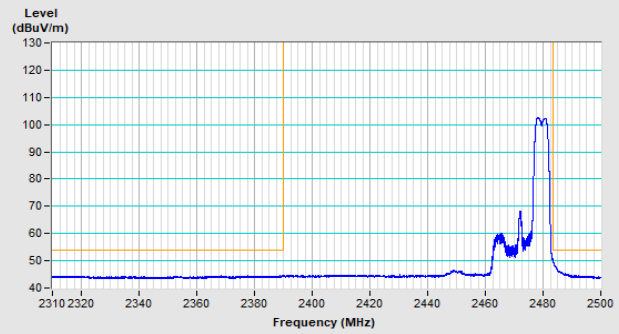

Horizontal (Average)

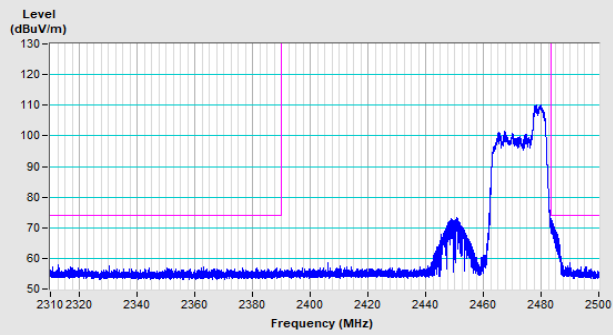


Vertical (Peak)

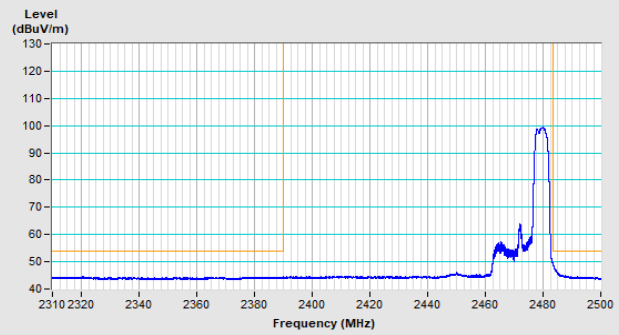


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

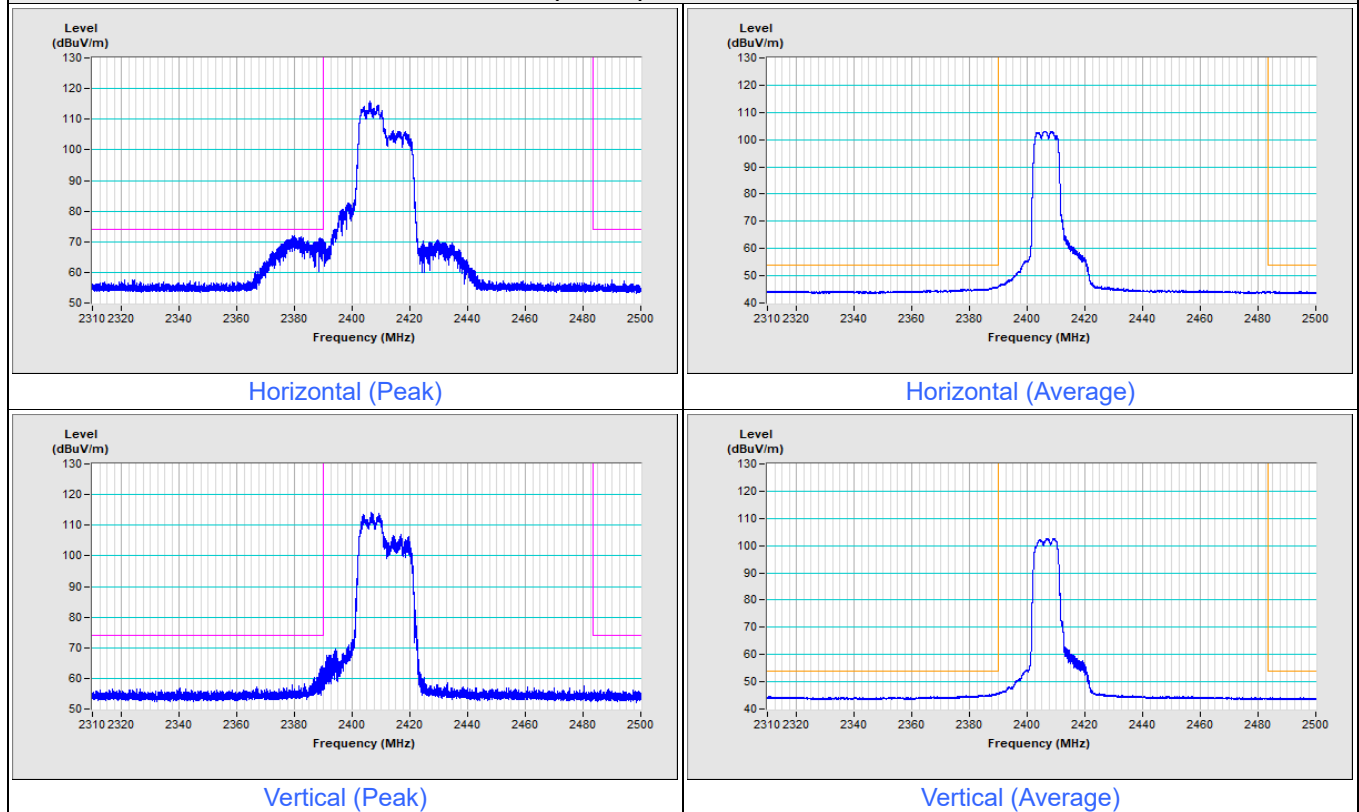


802.11be (EHT20) 106-tone RU Channel 2

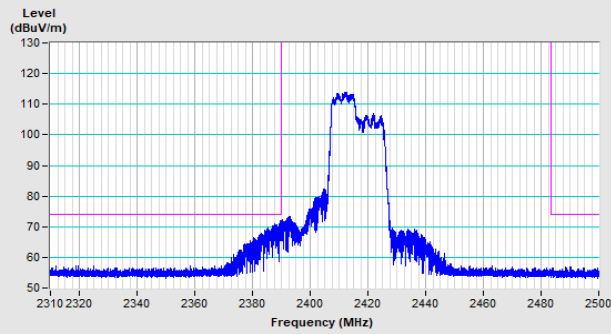


Horizontal (Peak)

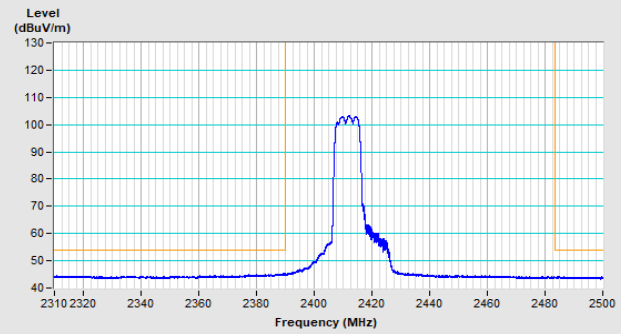

Horizontal (Average)

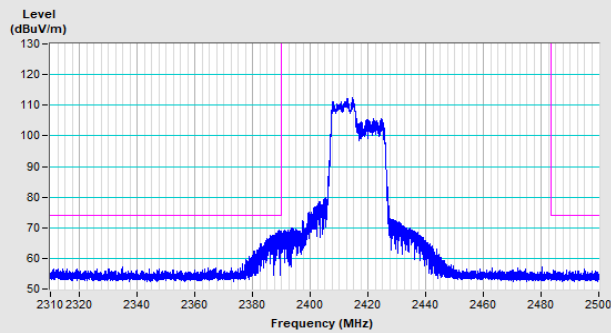


Vertical (Peak)

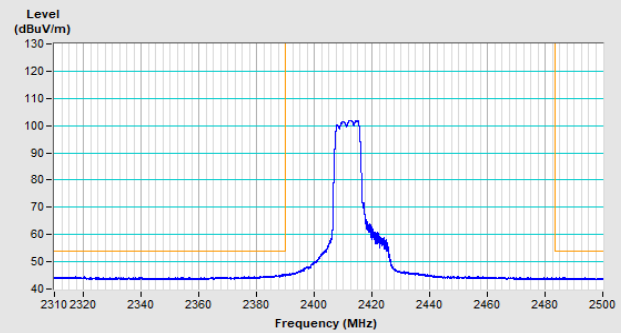


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 10

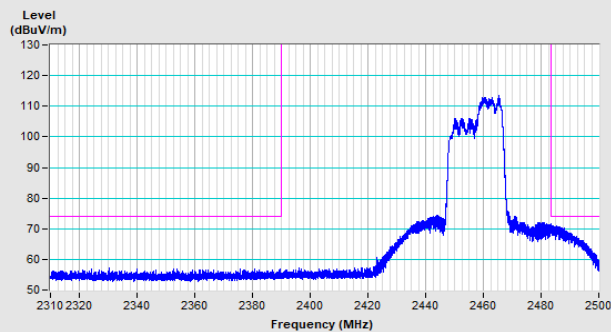


Horizontal (Peak)

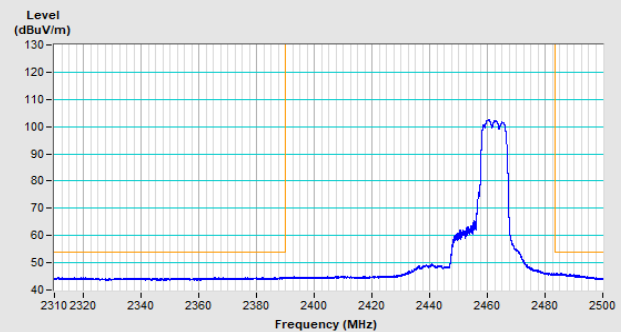

Horizontal (Average)

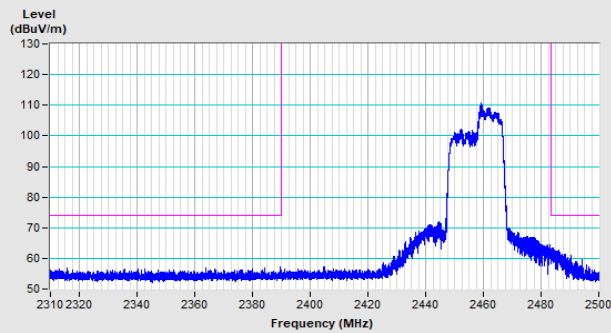


Vertical (Peak)

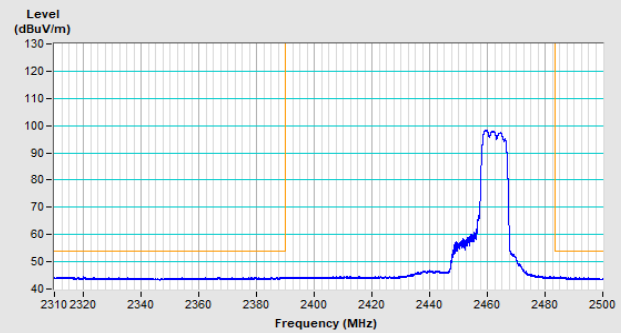


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 11

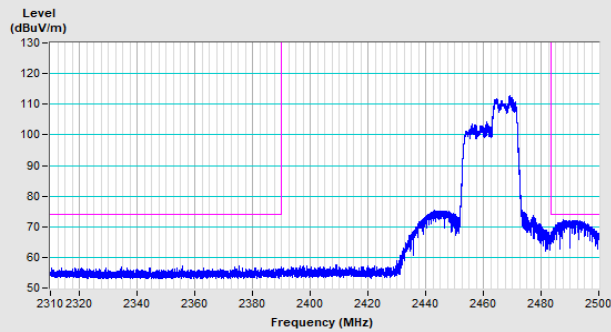


Horizontal (Peak)

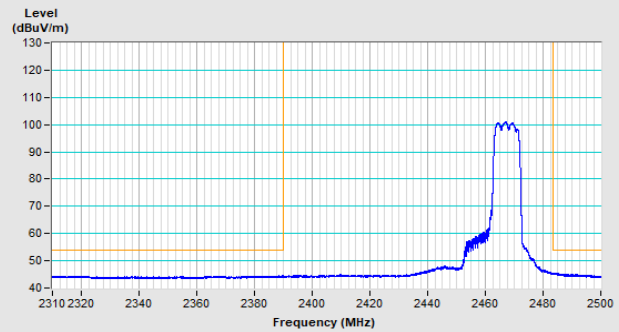

Horizontal (Average)

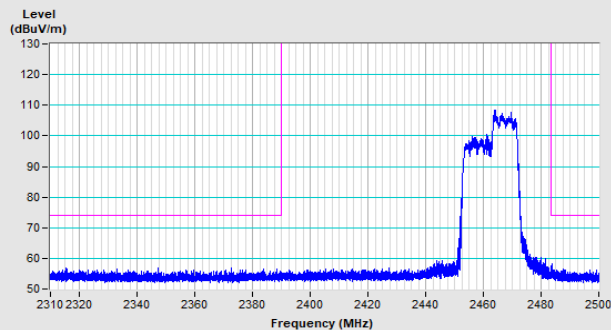


Vertical (Peak)

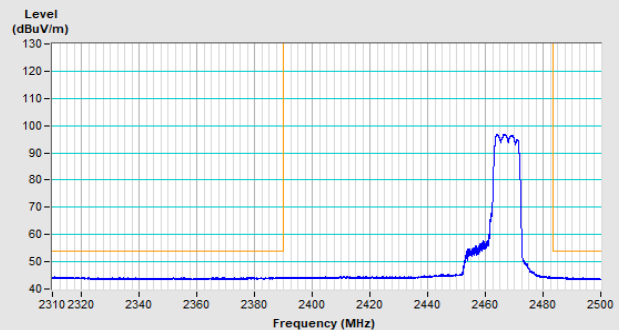


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

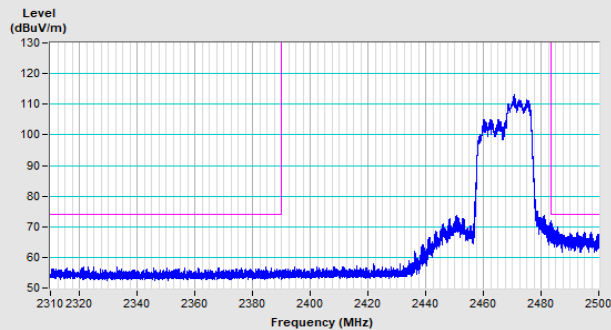


Horizontal (Peak)

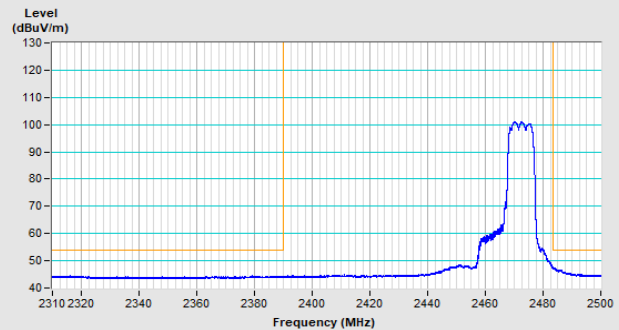

Horizontal (Average)

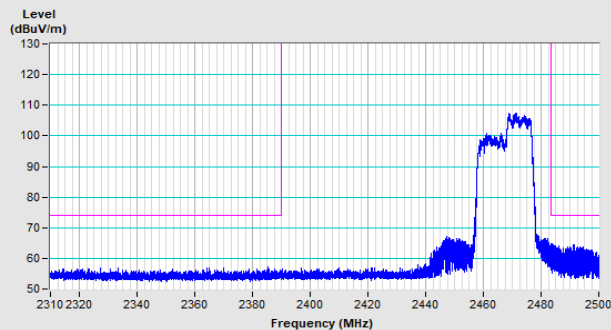


Vertical (Peak)

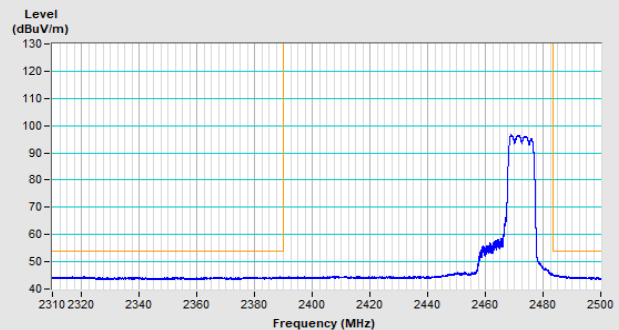


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

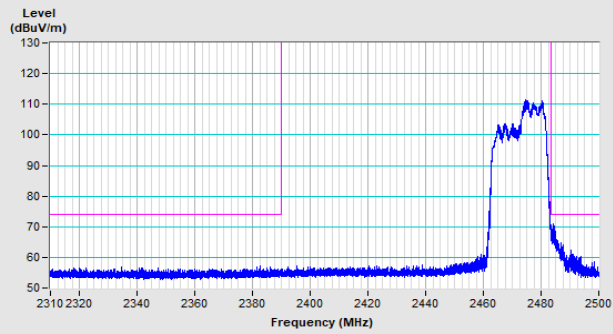


Horizontal (Peak)

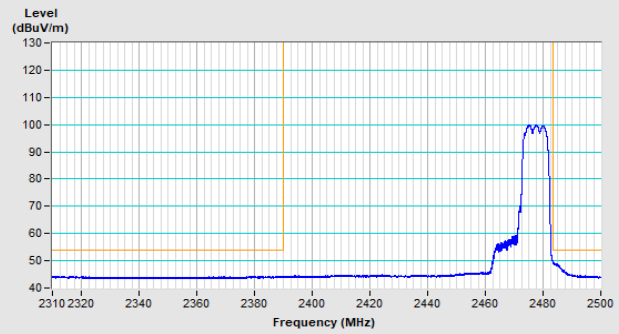

Horizontal (Average)

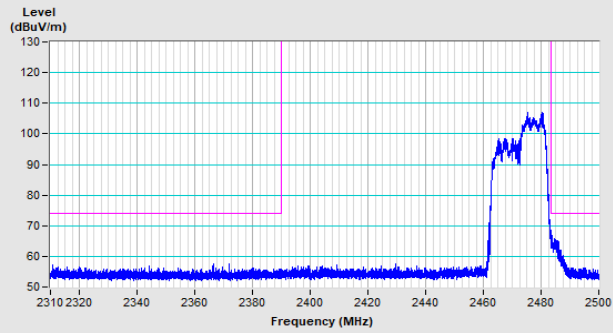


Vertical (Peak)

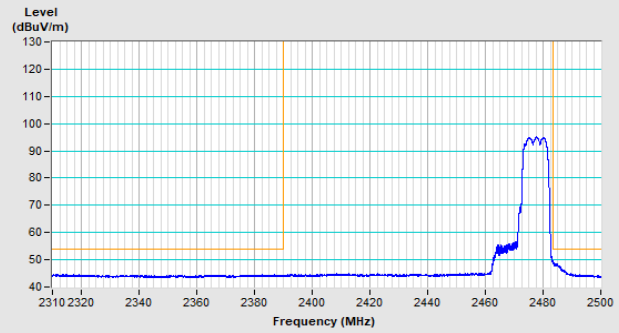


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

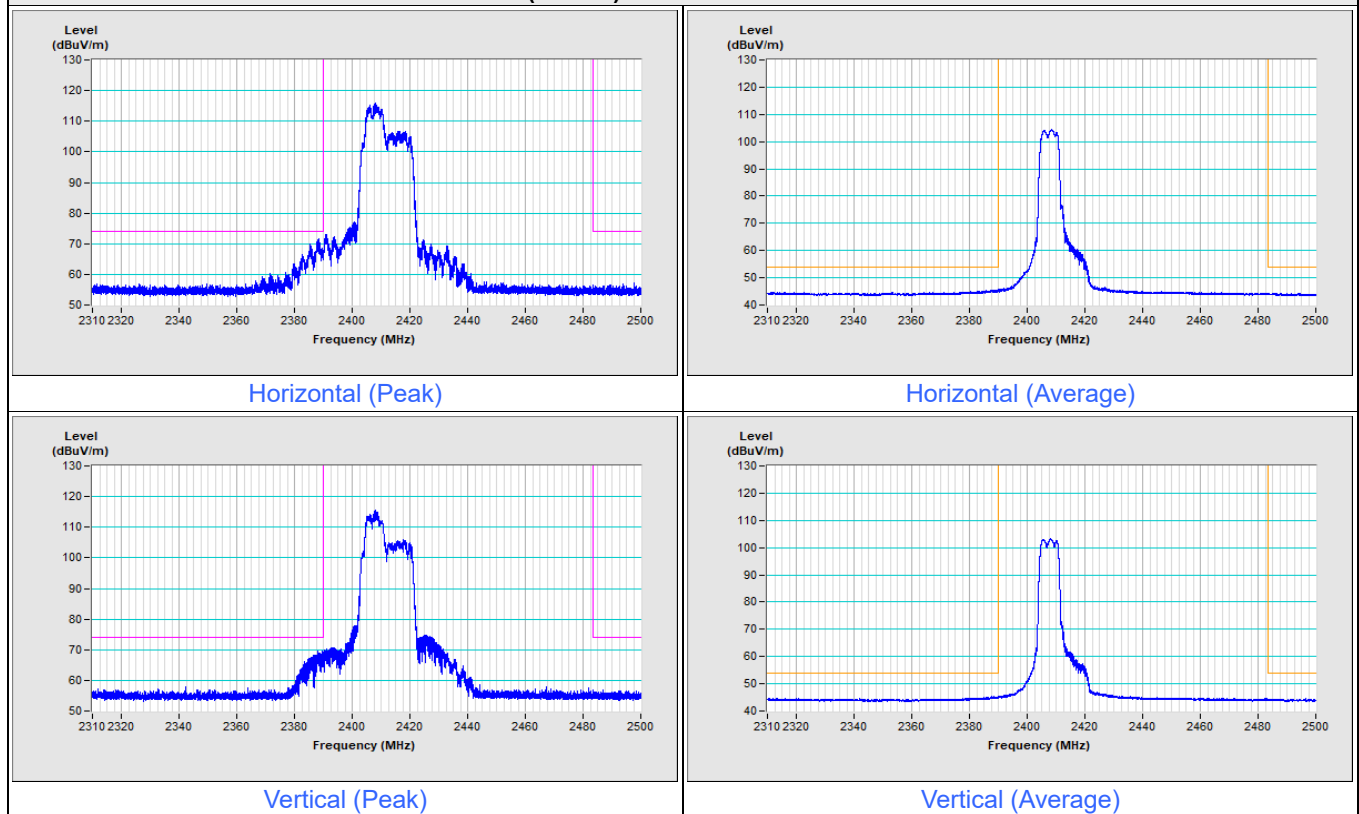


802.11be (EHT20) 52+26-tone MRU Channel 2

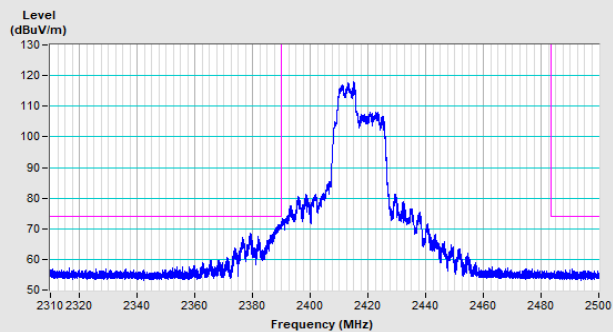


Horizontal (Peak)

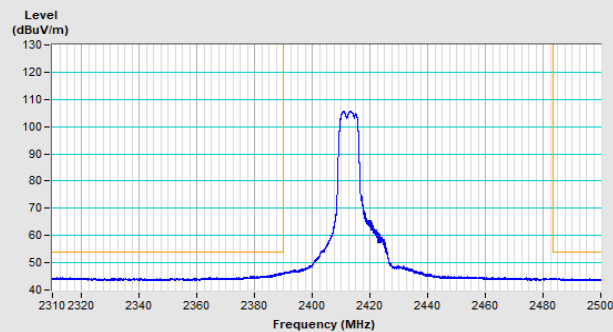

Horizontal (Average)

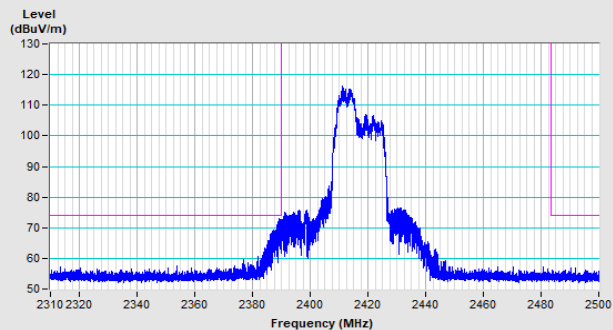


Vertical (Peak)

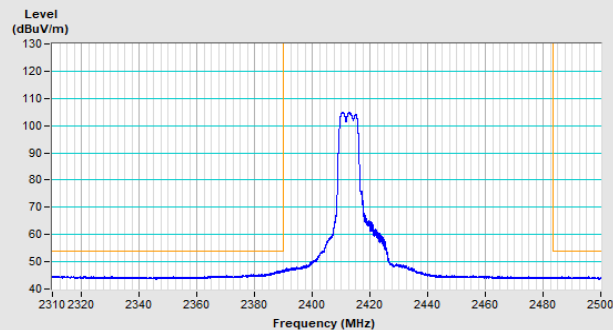


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 10

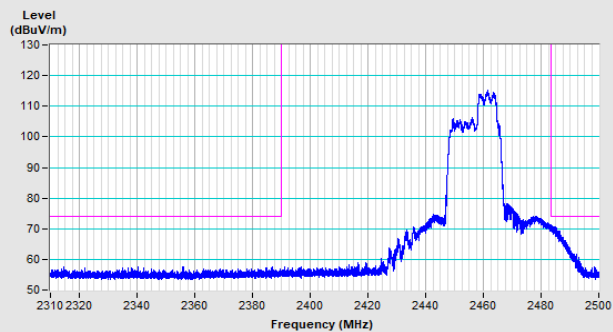


Horizontal (Peak)

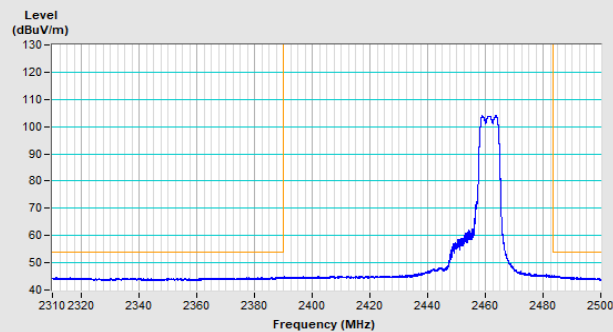

Horizontal (Average)

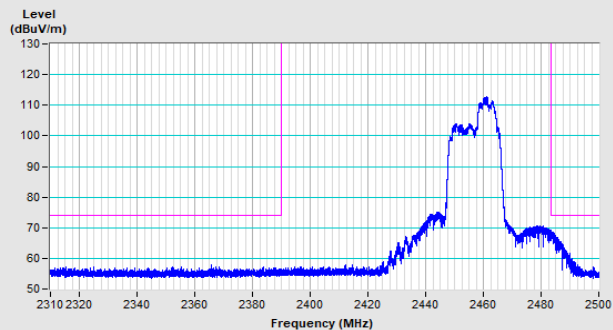


Vertical (Peak)

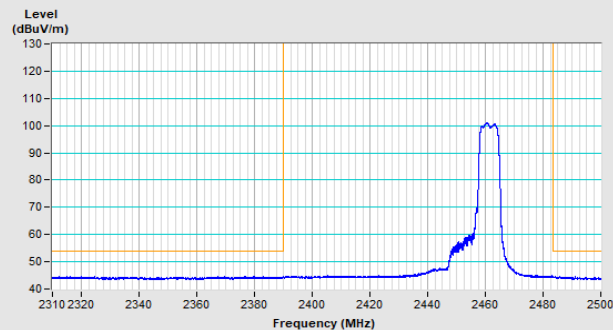


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 11

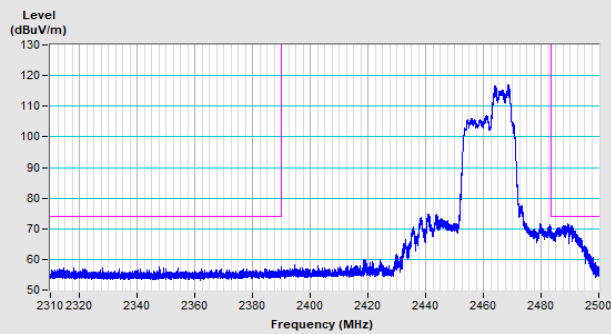


Horizontal (Peak)

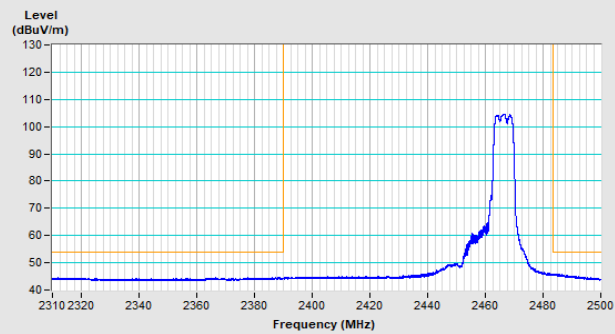

Horizontal (Average)

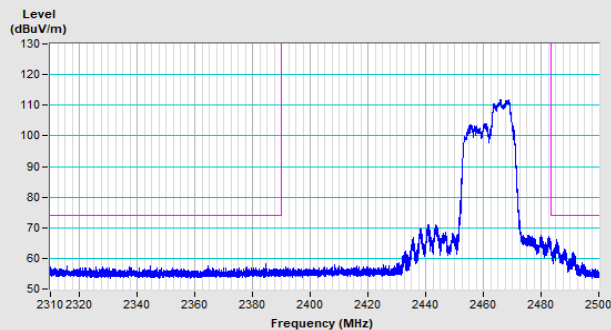


Vertical (Peak)

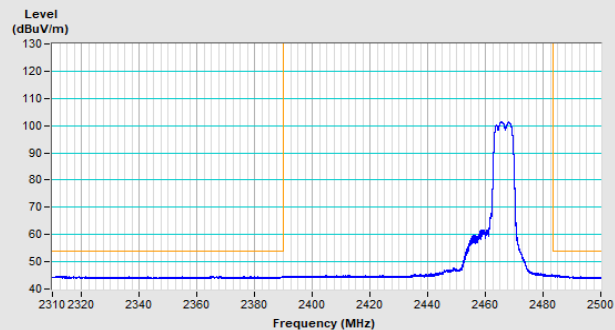


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 12

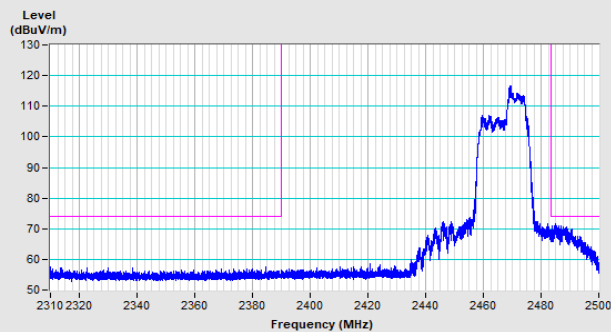


Horizontal (Peak)

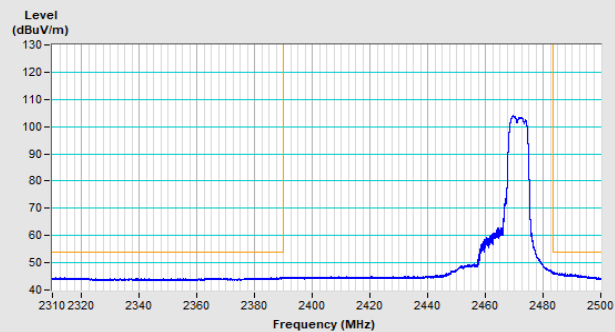

Horizontal (Average)

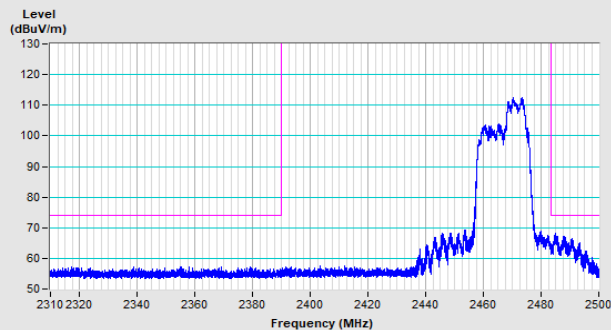


Vertical (Peak)

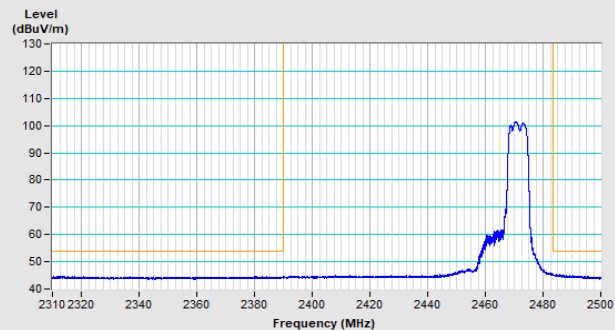


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 13

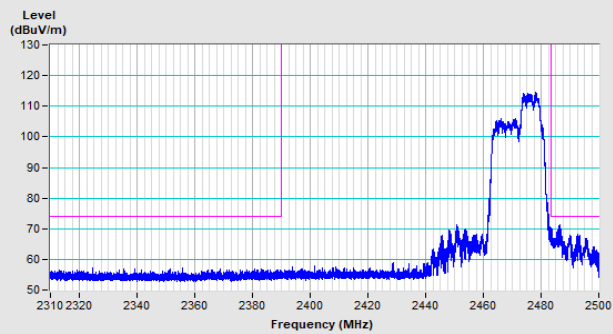


Horizontal (Peak)

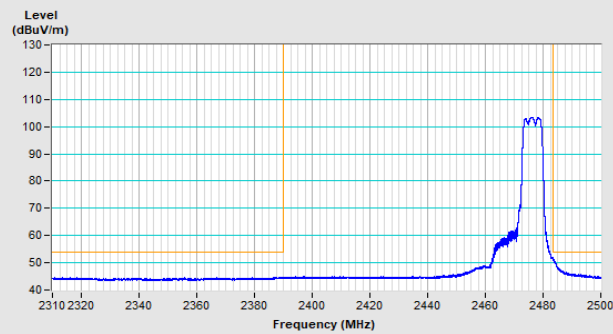

Horizontal (Average)

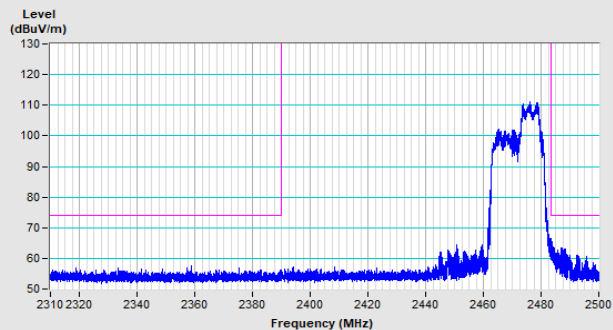


Vertical (Peak)

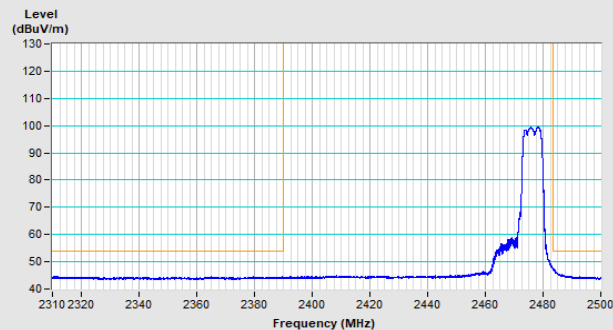


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

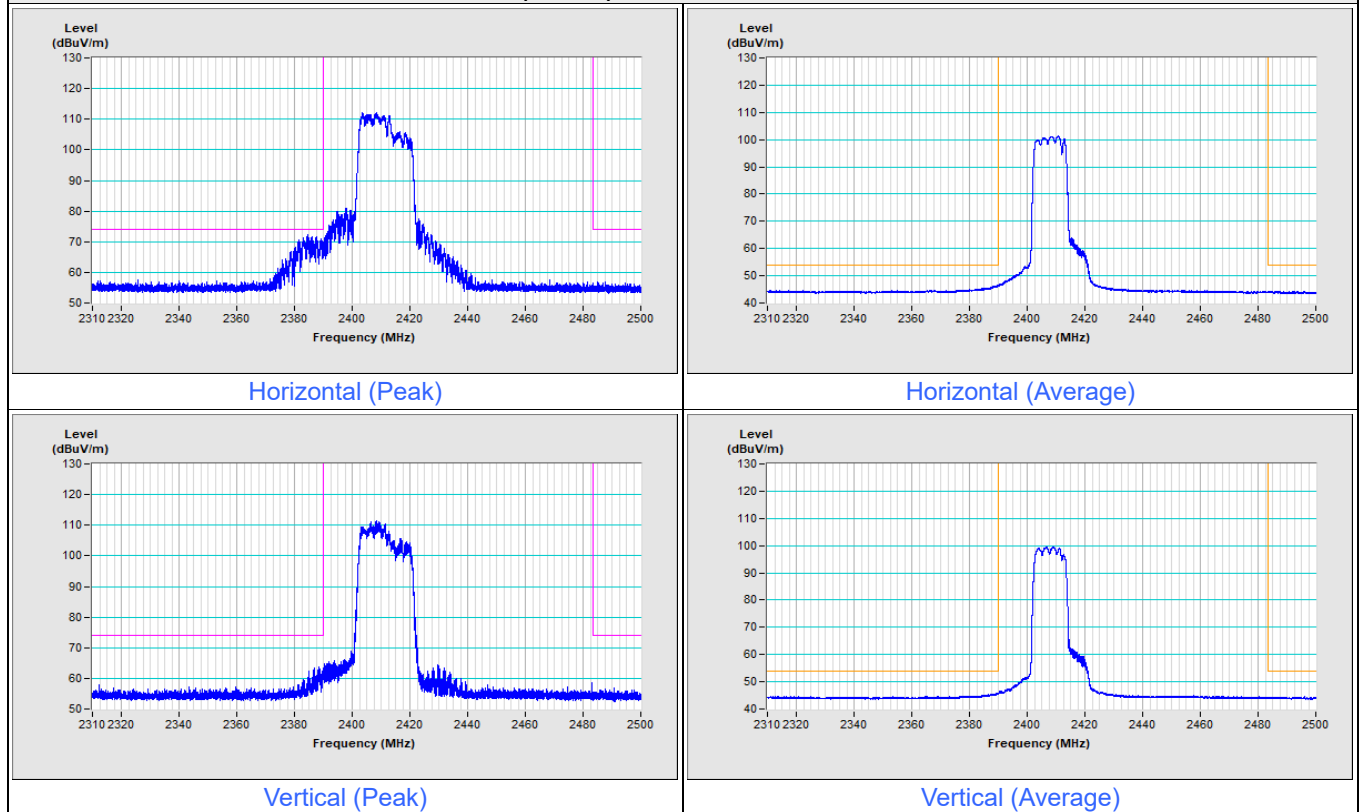


802.11be (EHT20) 106+26-tone MRU Channel 2

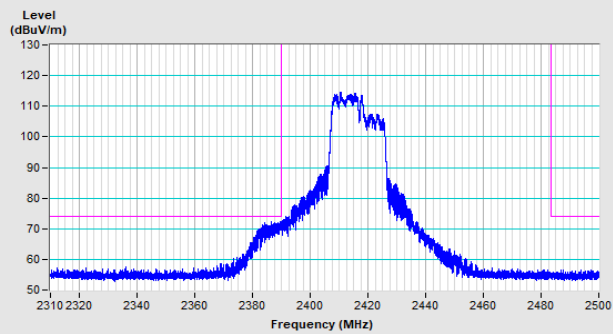


Horizontal (Peak)

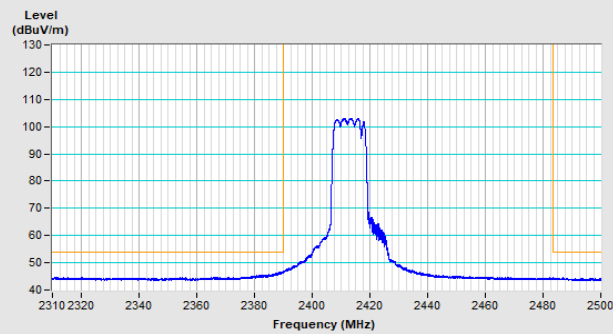

Horizontal (Average)

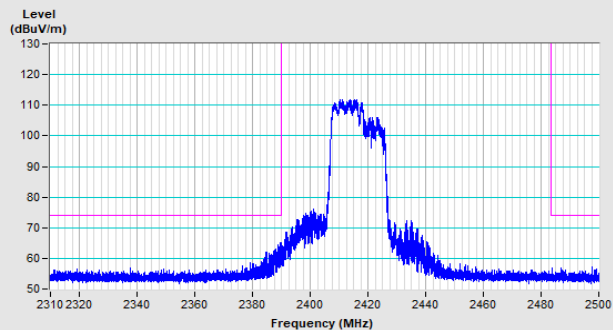


Vertical (Peak)

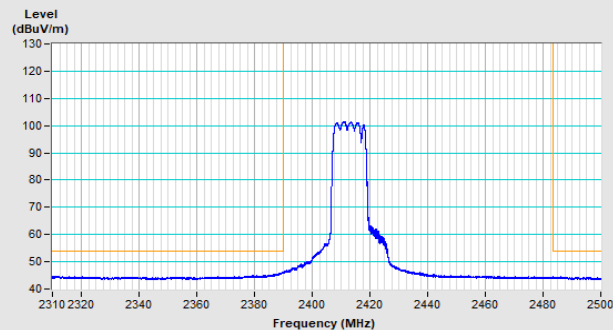


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 10

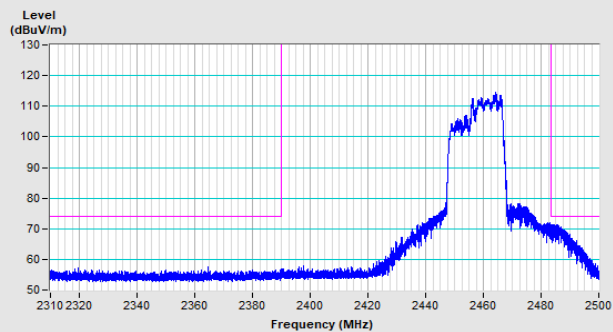


Horizontal (Peak)

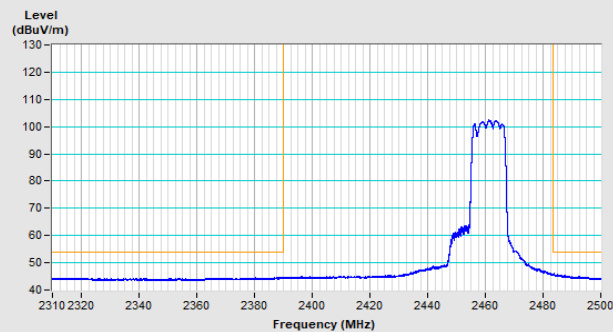

Horizontal (Average)

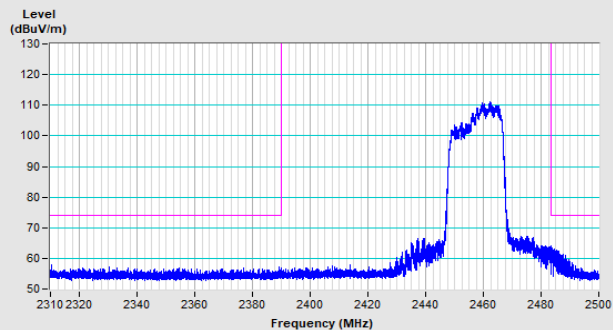


Vertical (Peak)

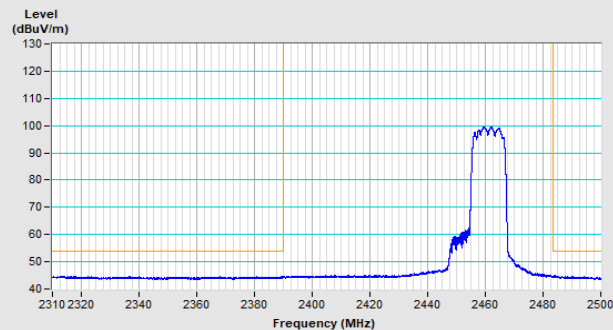


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 11

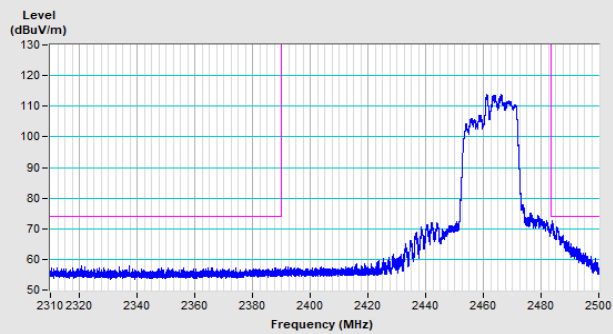


Horizontal (Peak)

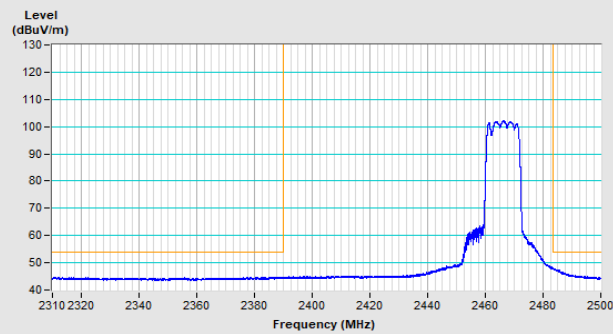

Horizontal (Average)

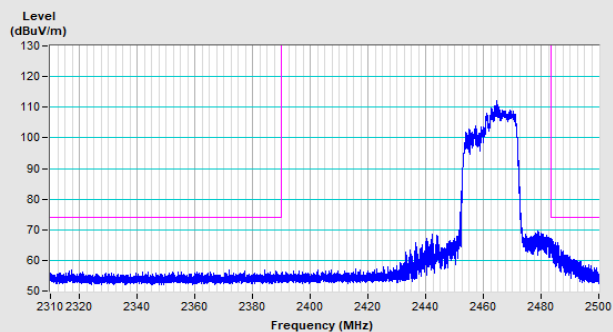


Vertical (Peak)

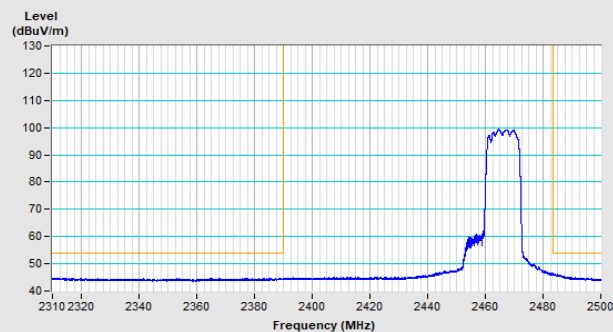


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 12

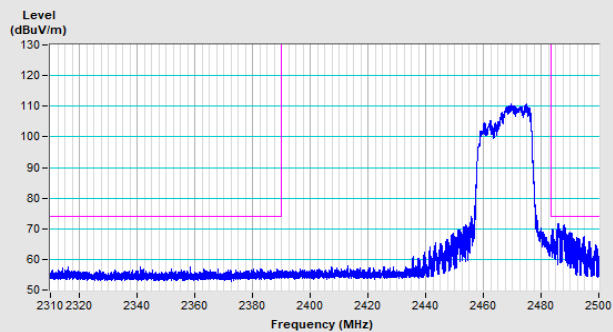


Horizontal (Peak)

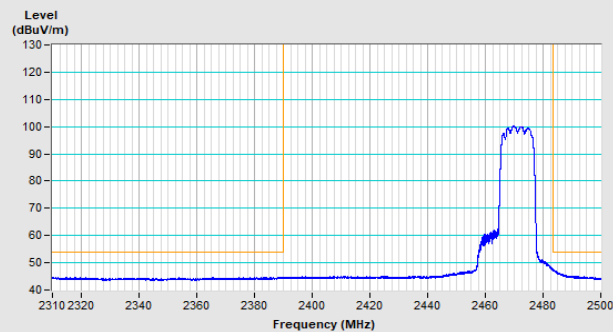

Horizontal (Average)

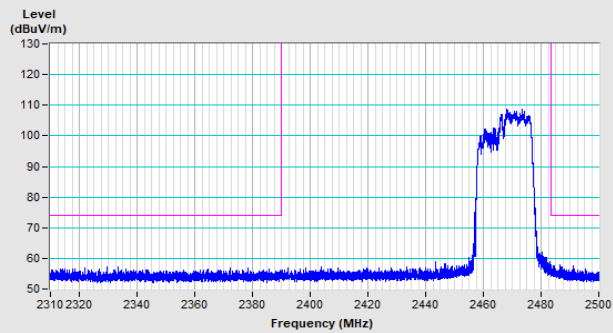


Vertical (Peak)

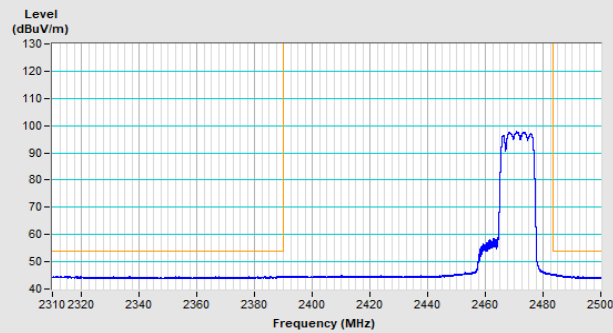


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 13

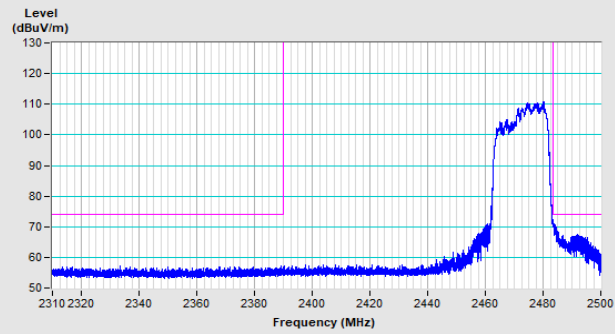


Horizontal (Peak)

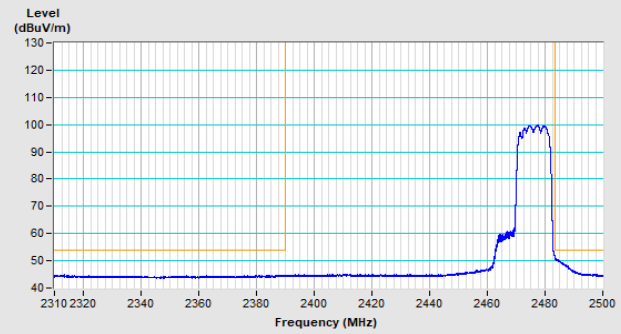

Horizontal (Average)

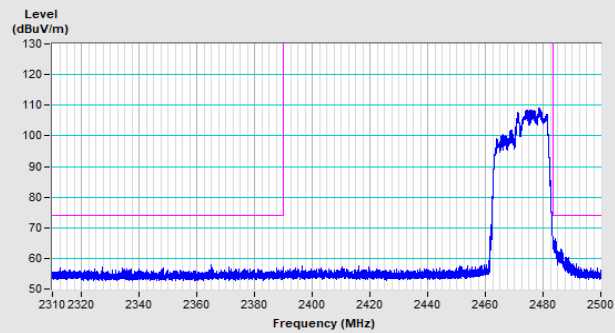

Vertical (Peak)

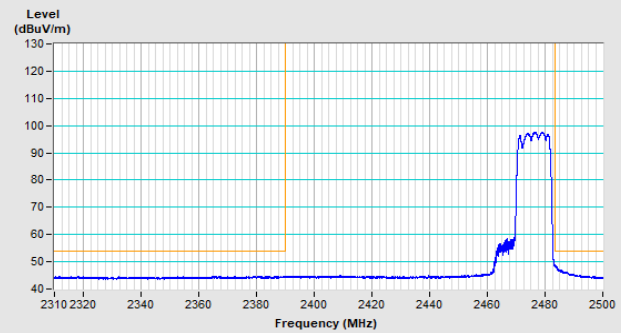

Vertical (Average)

Mode C

1Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	2.95 H	130	58.4	-2.0
2	2390.00	45.8 AV	54.0	-8.2	2.95 H	130	47.8	-2.0
3	*2412.00	104.4 PK			2.95 H	130	106.5	-2.1
4	*2412.00	102.2 AV			2.95 H	130	104.3	-2.1
5	4824.00	44.6 PK	74.0	-29.4	1.16 H	347	42.5	2.1
6	4824.00	43.1 AV	54.0	-10.9	1.16 H	347	41.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	2.09 V	36	61.3	-2.0
2	2390.00	52.1 AV	54.0	-1.9	2.09 V	36	54.1	-2.0
3	*2412.00	112.9 PK			2.09 V	36	115.0	-2.1
4	*2412.00	110.7 AV			2.09 V	36	112.8	-2.1
5	4824.00	47.7 PK	74.0	-26.3	1.18 V	85	45.6	2.1
6	4824.00	46.5 AV	54.0	-7.5	1.18 V	85	44.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.5 PK	74.0	-17.5	2.92 H	131	58.5	-2.0
2	2390.00	46.6 AV	54.0	-7.4	2.92 H	131	48.6	-2.0
3	*2417.00	105.1 PK			2.92 H	131	107.2	-2.1
4	*2417.00	102.9 AV			2.92 H	131	105.0	-2.1
5	4834.00	44.6 PK	74.0	-29.4	1.14 H	340	42.5	2.1
6	4834.00	43.2 AV	54.0	-10.8	1.14 H	340	41.1	2.1
7	7251.00	48.4 PK	74.0	-25.6	1.16 H	170	40.8	7.6
8	7251.00	41.1 AV	54.0	-12.9	1.16 H	170	33.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	1.65 V	333	62.9	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.65 V	333	54.3	-2.0
3	*2417.00	112.7 PK			1.65 V	333	114.8	-2.1
4	*2417.00	110.5 AV			1.65 V	333	112.6	-2.1
5	4834.00	48.0 PK	74.0	-26.0	1.14 V	85	45.9	2.1
6	4834.00	46.5 AV	54.0	-7.5	1.14 V	85	44.4	2.1
7	7251.00	49.9 PK	74.0	-24.1	3.05 V	81	42.3	7.6
8	7251.00	45.6 AV	54.0	-8.4	3.05 V	81	38.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	3.15 H	128	58.9	-2.0
2	2390.00	44.9 AV	54.0	-9.1	3.15 H	128	46.9	-2.0
3	*2437.00	105.1 PK			3.15 H	128	107.2	-2.1
4	*2437.00	102.9 AV			3.15 H	128	105.0	-2.1
5	2483.50	57.8 PK	74.0	-16.2	3.15 H	128	60.2	-2.4
6	2483.50	45.6 AV	54.0	-8.4	3.15 H	128	48.0	-2.4
7	4874.00	45.2 PK	74.0	-28.8	1.08 H	329	42.8	2.4
8	4874.00	43.3 AV	54.0	-10.7	1.08 H	329	40.9	2.4
9	7311.00	48.0 PK	74.0	-26.0	1.15 H	181	40.6	7.4
10	7311.00	42.3 AV	54.0	-11.7	1.15 H	181	34.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.5 PK	74.0	-15.5	1.84 V	38	60.5	-2.0
2	2390.00	46.8 AV	54.0	-7.2	1.84 V	38	48.8	-2.0
3	*2437.00	113.6 PK			1.84 V	38	115.7	-2.1
4	*2437.00	111.4 AV			1.84 V	38	113.5	-2.1
5	2483.50	59.7 PK	74.0	-14.3	1.84 V	38	62.1	-2.4
6	2483.50	47.5 AV	54.0	-6.5	1.84 V	38	49.9	-2.4
7	4874.00	48.3 PK	74.0	-25.7	1.17 V	69	45.9	2.4
8	4874.00	46.6 AV	54.0	-7.4	1.17 V	69	44.2	2.4
9	7311.00	50.0 PK	74.0	-24.0	3.10 V	95	42.6	7.4
10	7311.00	46.0 AV	54.0	-8.0	3.10 V	95	38.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.4 PK			2.94 H	133	106.8	-2.4
2	*2457.00	102.3 AV			2.94 H	133	104.7	-2.4
3	2483.50	56.4 PK	74.0	-17.6	2.94 H	133	58.8	-2.4
4	2483.50	45.9 AV	54.0	-8.1	2.94 H	133	48.3	-2.4
5	4914.00	44.2 PK	74.0	-29.8	1.14 H	349	41.7	2.5
6	4914.00	42.9 AV	54.0	-11.1	1.14 H	349	40.4	2.5
7	7371.00	48.2 PK	74.0	-25.8	1.22 H	164	40.6	7.6
8	7371.00	41.1 AV	54.0	-12.9	1.22 H	164	33.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.6 PK			1.49 V	33	115.0	-2.4
2	*2457.00	110.4 AV			1.49 V	33	112.8	-2.4
3	2483.50	59.8 PK	74.0	-14.2	1.49 V	33	62.2	-2.4
4	2483.50	50.4 AV	54.0	-3.6	1.49 V	33	52.8	-2.4
5	4914.00	48.6 PK	74.0	-25.4	1.20 V	74	46.1	2.5
6	4914.00	46.7 AV	54.0	-7.3	1.20 V	74	44.2	2.5
7	7371.00	49.4 PK	74.0	-24.6	3.16 V	91	41.8	7.6
8	7371.00	45.7 AV	54.0	-8.3	3.16 V	91	38.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.3 PK			3.08 H	129	106.7	-2.4
2	*2462.00	101.3 AV			3.08 H	129	103.7	-2.4
3	2483.50	57.3 PK	74.0	-16.7	3.08 H	129	59.7	-2.4
4	2483.50	45.1 AV	54.0	-8.9	3.08 H	129	47.5	-2.4
5	4924.00	43.6 PK	74.0	-30.4	1.12 H	353	41.1	2.5
6	4924.00	42.6 AV	54.0	-11.4	1.12 H	353	40.1	2.5
7	7386.00	48.5 PK	74.0	-25.5	1.20 H	178	40.8	7.7
8	7386.00	41.2 AV	54.0	-12.8	1.20 H	178	33.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.8 PK			1.41 V	32	115.2	-2.4
2	*2462.00	110.7 AV			1.41 V	32	113.1	-2.4
3	2483.50	60.6 PK	74.0	-13.4	1.41 V	32	63.0	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.41 V	32	54.3	-2.4
5	4924.00	48.3 PK	74.0	-25.7	1.20 V	74	45.8	2.5
6	4924.00	46.2 AV	54.0	-7.8	1.20 V	74	43.7	2.5
7	7386.00	50.0 PK	74.0	-24.0	3.14 V	92	42.3	7.7
8	7386.00	46.0 AV	54.0	-8.0	3.14 V	92	38.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.1 PK			3.05 H	130	105.5	-2.4
2	*2467.00	100.2 AV			3.05 H	130	102.6	-2.4
3	2483.50	56.8 PK	74.0	-17.2	3.05 H	130	59.2	-2.4
4	2483.50	44.9 AV	54.0	-9.1	3.05 H	130	47.3	-2.4
5	4934.00	44.1 PK	74.0	-29.9	1.07 H	359	41.7	2.4
6	4934.00	42.9 AV	54.0	-11.1	1.07 H	359	40.5	2.4
7	7401.00	47.9 PK	74.0	-26.1	1.15 H	183	40.0	7.9
8	7401.00	40.8 AV	54.0	-13.2	1.15 H	183	32.9	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.2 PK			1.42 V	34	113.6	-2.4
2	*2467.00	109.1 AV			1.42 V	34	111.5	-2.4
3	2483.50	60.9 PK	74.0	-13.1	1.42 V	34	63.3	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.42 V	34	52.7	-2.4
5	4934.00	47.9 PK	74.0	-26.1	1.18 V	78	45.5	2.4
6	4934.00	46.0 AV	54.0	-8.0	1.18 V	78	43.6	2.4
7	7401.00	50.3 PK	74.0	-23.7	3.09 V	99	42.4	7.9
8	7401.00	46.2 AV	54.0	-7.8	3.09 V	99	38.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.8 PK			2.84 H	132	102.2	-2.4
2	*2472.00	96.8 AV			2.84 H	132	99.2	-2.4
3	2483.50	57.6 PK	74.0	-16.4	2.84 H	132	60.0	-2.4
4	2483.50	46.4 AV	54.0	-7.6	2.84 H	132	48.8	-2.4
5	4944.00	45.1 PK	74.0	-28.9	1.08 H	326	42.7	2.4
6	4944.00	43.0 AV	54.0	-11.0	1.08 H	326	40.6	2.4
7	7416.00	47.5 PK	74.0	-26.5	1.10 H	184	39.5	8.0
8	7416.00	42.0 AV	54.0	-12.0	1.10 H	184	34.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.4 PK			1.17 V	206	109.8	-2.4
2	*2472.00	105.3 AV			1.17 V	206	107.7	-2.4
3	2483.50	60.6 PK	74.0	-13.4	1.17 V	206	63.0	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.17 V	206	54.3	-2.4
5	4944.00	48.4 PK	74.0	-25.6	1.21 V	73	46.0	2.4
6	4944.00	46.0 AV	54.0	-8.0	1.21 V	73	43.6	2.4
7	7416.00	49.7 PK	74.0	-24.3	3.10 V	97	41.7	8.0
8	7416.00	45.8 AV	54.0	-8.2	3.10 V	97	37.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.7 PK	74.0	-15.3	2.93 H	132	60.7	-2.0
2	2390.00	44.7 AV	54.0	-9.3	2.93 H	132	46.7	-2.0
3	*2412.00	104.2 PK			2.93 H	132	106.3	-2.1
4	*2412.00	94.3 AV			2.93 H	132	96.4	-2.1
5	4824.00	41.6 PK	74.0	-32.4	1.13 H	322	39.5	2.1
6	4824.00	25.0 AV	54.0	-29.0	1.13 H	322	22.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.58 V	32	68.5	-2.0
2	2390.00	50.8 AV	54.0	-3.2	1.58 V	32	52.8	-2.0
3	*2412.00	112.6 PK			1.58 V	32	114.7	-2.1
4	*2412.00	103.5 AV			1.58 V	32	105.6	-2.1
5	4824.00	44.1 PK	74.0	-29.9	1.92 V	73	42.0	2.1
6	4824.00	33.6 AV	54.0	-20.4	1.92 V	73	31.5	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.9 PK	74.0	-14.1	2.93 H	131	61.9	-2.0
2	2390.00	44.6 AV	54.0	-9.4	2.93 H	131	46.6	-2.0
3	*2417.00	104.9 PK			2.93 H	131	107.0	-2.1
4	*2417.00	94.9 AV			2.93 H	131	97.0	-2.1
5	4834.00	41.1 PK	74.0	-32.9	1.08 H	320	39.0	2.1
6	4834.00	29.5 AV	54.0	-24.5	1.08 H	320	27.4	2.1
7	7251.00	47.5 PK	74.0	-26.5	1.02 H	163	39.9	7.6
8	7251.00	35.9 AV	54.0	-18.1	1.02 H	163	28.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.53 V	32	70.9	-2.0
2	2390.00	52.0 AV	54.0	-2.0	1.53 V	32	54.0	-2.0
3	*2417.00	113.7 PK			1.53 V	32	115.8	-2.1
4	*2417.00	104.3 AV			1.53 V	32	106.4	-2.1
5	4834.00	44.6 PK	74.0	-29.4	1.90 V	74	42.5	2.1
6	4834.00	33.8 AV	54.0	-20.2	1.90 V	74	31.7	2.1
7	7251.00	51.8 PK	74.0	-22.2	1.71 V	109	44.2	7.6
8	7251.00	40.5 AV	54.0	-13.5	1.71 V	109	32.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	2.86 H	133	61.0	-2.0
2	2390.00	43.6 AV	54.0	-10.4	2.86 H	133	45.6	-2.0
3	*2437.00	107.5 PK			2.86 H	133	109.6	-2.1
4	*2437.00	97.5 AV			2.86 H	133	99.6	-2.1
5	2483.50	60.4 PK	74.0	-13.6	2.86 H	133	62.8	-2.4
6	2483.50	43.4 AV	54.0	-10.6	2.86 H	133	45.8	-2.4
7	4874.00	41.7 PK	74.0	-32.3	1.12 H	332	39.3	2.4
8	4874.00	30.0 AV	54.0	-24.0	1.12 H	332	27.6	2.4
9	7311.00	47.5 PK	74.0	-26.5	1.00 H	177	40.1	7.4
10	7311.00	35.7 AV	54.0	-18.3	1.00 H	177	28.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.69 V	35	69.7	-2.0
2	2390.00	48.6 AV	54.0	-5.4	1.69 V	35	50.6	-2.0
3	*2437.00	116.3 PK			1.69 V	35	118.4	-2.1
4	*2437.00	107.1 AV			1.69 V	35	109.2	-2.1
5	2483.50	64.3 PK	74.0	-9.7	1.69 V	35	66.7	-2.4
6	2483.50	46.5 AV	54.0	-7.5	1.69 V	35	48.9	-2.4
7	4874.00	44.6 PK	74.0	-29.4	1.96 V	72	42.2	2.4
8	4874.00	34.0 AV	54.0	-20.0	1.96 V	72	31.6	2.4
9	7311.00	51.3 PK	74.0	-22.7	1.75 V	100	43.9	7.4
10	7311.00	40.6 AV	54.0	-13.4	1.75 V	100	33.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	105.6 PK			2.95 H	133	108.0	-2.4
2	*2457.00	94.7 AV			2.95 H	133	97.1	-2.4
3	2483.50	61.8 PK	74.0	-12.2	2.95 H	133	64.2	-2.4
4	2483.50	45.3 AV	54.0	-8.7	2.95 H	133	47.7	-2.4
5	4914.00	41.3 PK	74.0	-32.7	1.07 H	311	38.8	2.5
6	4914.00	29.4 AV	54.0	-24.6	1.07 H	311	26.9	2.5
7	7371.00	47.0 PK	74.0	-27.0	1.00 H	166	39.4	7.6
8	7371.00	35.5 AV	54.0	-18.5	1.00 H	166	27.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.3 PK			1.42 V	33	115.7	-2.4
2	*2457.00	104.2 AV			1.42 V	33	106.6	-2.4
3	2483.50	67.9 PK	74.0	-6.1	1.42 V	33	70.3	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.42 V	33	54.2	-2.4
5	4914.00	44.0 PK	74.0	-30.0	1.91 V	77	41.5	2.5
6	4914.00	33.5 AV	54.0	-20.5	1.91 V	77	31.0	2.5
7	7371.00	51.0 PK	74.0	-23.0	1.78 V	113	43.4	7.6
8	7371.00	40.4 AV	54.0	-13.6	1.78 V	113	32.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.6 PK			2.85 H	132	107.0	-2.4
2	*2462.00	94.5 AV			2.85 H	132	96.9	-2.4
3	2483.50	58.9 PK	74.0	-15.1	2.85 H	132	61.3	-2.4
4	2483.50	45.7 AV	54.0	-8.3	2.85 H	132	48.1	-2.4
5	4924.00	41.3 PK	74.0	-32.7	1.10 H	297	38.8	2.5
6	4924.00	29.4 AV	54.0	-24.6	1.10 H	297	26.9	2.5
7	7386.00	46.4 PK	74.0	-27.6	1.04 H	153	38.7	7.7
8	7386.00	35.2 AV	54.0	-18.8	1.04 H	153	27.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.8 PK			1.42 V	33	114.2	-2.4
2	*2462.00	103.3 AV			1.42 V	33	105.7	-2.4
3	2483.50	68.2 PK	74.0	-5.8	1.42 V	33	70.6	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.42 V	33	54.3	-2.4
5	4924.00	43.9 PK	74.0	-30.1	1.87 V	82	41.4	2.5
6	4924.00	33.5 AV	54.0	-20.5	1.87 V	82	31.0	2.5
7	7386.00	50.6 PK	74.0	-23.4	1.73 V	112	42.9	7.7
8	7386.00	40.2 AV	54.0	-13.8	1.73 V	112	32.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.3 PK			2.87 H	131	106.7	-2.4
2	*2467.00	93.8 AV			2.87 H	131	96.2	-2.4
3	2483.50	60.8 PK	74.0	-13.2	2.87 H	131	63.2	-2.4
4	2483.50	46.7 AV	54.0	-7.3	2.87 H	131	49.1	-2.4
5	4934.00	41.8 PK	74.0	-32.2	1.14 H	307	39.4	2.4
6	4934.00	29.7 AV	54.0	-24.3	1.14 H	307	27.3	2.4
7	7401.00	46.0 PK	74.0	-28.0	1.09 H	144	38.1	7.9
8	7401.00	34.7 AV	54.0	-19.3	1.09 H	144	26.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	111.6 PK			1.41 V	33	114.0	-2.4
2	*2467.00	102.8 AV			1.41 V	33	105.2	-2.4
3	2483.50	66.4 PK	74.0	-7.6	1.41 V	33	68.8	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.41 V	33	54.7	-2.4
5	4934.00	43.9 PK	74.0	-30.1	1.93 V	86	41.5	2.4
6	4934.00	33.4 AV	54.0	-20.6	1.93 V	86	31.0	2.4
7	7401.00	50.3 PK	74.0	-23.7	1.70 V	98	42.4	7.9
8	7401.00	40.0 AV	54.0	-14.0	1.70 V	98	32.1	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.5 PK			2.86 H	132	104.9	-2.4
2	*2472.00	92.5 AV			2.86 H	132	94.9	-2.4
3	2483.50	63.7 PK	74.0	-10.3	2.86 H	132	66.1	-2.4
4	2483.50	46.3 AV	54.0	-7.7	2.86 H	132	48.7	-2.4
5	4944.00	41.4 PK	74.0	-32.6	1.12 H	312	39.0	2.4
6	4944.00	29.3 AV	54.0	-24.7	1.12 H	312	26.9	2.4
7	7416.00	45.9 PK	74.0	-28.1	1.07 H	158	37.9	8.0
8	7416.00	34.3 AV	54.0	-19.7	1.07 H	158	26.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	108.2 PK			1.16 V	206	110.6	-2.4
2	*2472.00	100.7 AV			1.16 V	206	103.1	-2.4
3	2483.50	72.1 PK	74.0	-1.9	1.16 V	206	74.5	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.16 V	206	53.6	-2.4
5	4944.00	44.0 PK	74.0	-30.0	1.97 V	70	41.6	2.4
6	4944.00	33.4 AV	54.0	-20.6	1.97 V	70	31.0	2.4
7	7416.00	50.1 PK	74.0	-23.9	1.75 V	96	42.1	8.0
8	7416.00	39.6 AV	54.0	-14.4	1.75 V	96	31.6	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	2.98 H	129	65.5	-2.0
2	2390.00	48.0 AV	54.0	-6.0	2.98 H	129	50.0	-2.0
3	*2412.00	106.4 PK			2.98 H	129	108.5	-2.1
4	*2412.00	94.7 AV			2.98 H	129	96.8	-2.1
5	4824.00	43.0 PK	74.0	-31.0	1.07 H	353	40.9	2.1
6	4824.00	30.0 AV	54.0	-24.0	1.07 H	353	27.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.55 V	33	69.6	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.55 V	33	54.4	-2.0
3	*2412.00	114.9 PK			1.55 V	33	117.0	-2.1
4	*2412.00	103.2 AV			1.55 V	33	105.3	-2.1
5	4824.00	44.3 PK	74.0	-29.7	1.99 V	78	42.2	2.1
6	4824.00	33.5 AV	54.0	-20.5	1.99 V	78	31.4	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	2.94 H	131	59.4	-2.0
2	2390.00	44.0 AV	54.0	-10.0	2.94 H	131	46.0	-2.0
3	*2417.00	107.6 PK			2.94 H	131	109.7	-2.1
4	*2417.00	94.0 AV			2.94 H	131	96.1	-2.1
5	4834.00	43.0 PK	74.0	-31.0	1.12 H	345	40.9	2.1
6	4834.00	30.3 AV	54.0	-23.7	1.12 H	345	28.2	2.1
7	7251.00	48.4 PK	74.0	-25.6	1.17 H	183	40.8	7.6
8	7251.00	35.5 AV	54.0	-18.5	1.17 H	183	27.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.50 V	33	69.7	-2.0
2	2390.00	51.6 AV	54.0	-2.4	1.50 V	33	53.6	-2.0
3	*2417.00	113.2 PK			1.50 V	33	115.3	-2.1
4	*2417.00	103.4 AV			1.50 V	33	105.5	-2.1
5	4834.00	44.5 PK	74.0	-29.5	1.94 V	84	42.4	2.1
6	4834.00	34.0 AV	54.0	-20.0	1.94 V	84	31.9	2.1
7	7251.00	50.9 PK	74.0	-23.1	3.12 V	80	43.3	7.6
8	7251.00	38.8 AV	54.0	-15.2	3.12 V	80	31.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.3 PK	74.0	-15.7	2.89 H	133	60.3	-2.0
2	2390.00	44.2 AV	54.0	-9.8	2.89 H	133	46.2	-2.0
3	*2437.00	109.7 PK			2.89 H	133	111.8	-2.1
4	*2437.00	98.1 AV			2.89 H	133	100.2	-2.1
5	2483.50	59.9 PK	74.0	-14.1	2.89 H	133	62.3	-2.4
6	2483.50	44.4 AV	54.0	-9.6	2.89 H	133	46.8	-2.4
7	4874.00	42.6 PK	74.0	-31.4	1.15 H	333	40.2	2.4
8	4874.00	30.8 AV	54.0	-23.2	1.15 H	333	28.4	2.4
9	7311.00	48.2 PK	74.0	-25.8	1.22 H	180	40.8	7.4
10	7311.00	35.5 AV	54.0	-18.5	1.22 H	180	28.1	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.65 V	35	70.2	-2.0
2	2390.00	50.7 AV	54.0	-3.3	1.65 V	35	52.7	-2.0
3	*2437.00	118.4 PK			1.65 V	35	120.5	-2.1
4	*2437.00	106.8 AV			1.65 V	35	108.9	-2.1
5	2483.50	69.2 PK	74.0	-4.8	1.65 V	35	71.6	-2.4
6	2483.50	48.7 AV	54.0	-5.3	1.65 V	35	51.1	-2.4
7	4874.00	44.5 PK	74.0	-29.5	1.95 V	73	42.1	2.4
8	4874.00	34.2 AV	54.0	-19.8	1.95 V	73	31.8	2.4
9	7311.00	51.0 PK	74.0	-23.0	3.08 V	80	43.6	7.4
10	7311.00	39.0 AV	54.0	-15.0	3.08 V	80	31.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.8 PK			2.92 H	132	109.2	-2.4
2	*2457.00	94.6 AV			2.92 H	132	97.0	-2.4
3	2483.50	59.5 PK	74.0	-14.5	2.92 H	132	61.9	-2.4
4	2483.50	45.8 AV	54.0	-8.2	2.92 H	132	48.2	-2.4
5	4914.00	43.2 PK	74.0	-30.8	1.13 H	337	40.7	2.5
6	4914.00	30.5 AV	54.0	-23.5	1.13 H	337	28.0	2.5
7	7371.00	48.2 PK	74.0	-25.8	1.12 H	196	40.6	7.6
8	7371.00	35.1 AV	54.0	-18.9	1.12 H	196	27.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	114.1 PK			1.91 V	40	116.5	-2.4
2	*2457.00	103.2 AV			1.91 V	40	105.6	-2.4
3	2483.50	66.9 PK	74.0	-7.1	1.91 V	40	69.3	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.91 V	40	53.6	-2.4
5	4914.00	44.4 PK	74.0	-29.6	1.94 V	85	41.9	2.5
6	4914.00	33.9 AV	54.0	-20.1	1.94 V	85	31.4	2.5
7	7371.00	50.7 PK	74.0	-23.3	3.07 V	90	43.1	7.6
8	7371.00	38.8 AV	54.0	-15.2	3.07 V	90	31.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.2 PK			2.86 H	133	108.6	-2.4
2	*2462.00	93.6 AV			2.86 H	133	96.0	-2.4
3	2483.50	58.5 PK	74.0	-15.5	2.86 H	133	60.9	-2.4
4	2483.50	45.4 AV	54.0	-8.6	2.86 H	133	47.8	-2.4
5	4924.00	43.0 PK	74.0	-31.0	1.15 H	321	40.5	2.5
6	4924.00	30.3 AV	54.0	-23.7	1.15 H	321	27.8	2.5
7	7386.00	47.9 PK	74.0	-26.1	1.11 H	185	40.2	7.7
8	7386.00	34.8 AV	54.0	-19.2	1.11 H	185	27.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.2 PK			1.80 V	35	115.6	-2.4
2	*2462.00	102.3 AV			1.80 V	35	104.7	-2.4
3	2483.50	65.8 PK	74.0	-8.2	1.80 V	35	68.2	-2.4
4	2483.50	51.3 AV	54.0	-2.7	1.80 V	35	53.7	-2.4
5	4924.00	44.1 PK	74.0	-29.9	1.88 V	83	41.6	2.5
6	4924.00	33.7 AV	54.0	-20.3	1.88 V	83	31.2	2.5
7	7386.00	50.8 PK	74.0	-23.2	3.06 V	83	43.1	7.7
8	7386.00	38.9 AV	54.0	-15.1	3.06 V	83	31.2	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.2 PK			2.83 H	132	107.6	-2.4
2	*2467.00	92.9 AV			2.83 H	132	95.3	-2.4
3	2483.50	59.1 PK	74.0	-14.9	2.83 H	132	61.5	-2.4
4	2483.50	46.5 AV	54.0	-7.5	2.83 H	132	48.9	-2.4
5	4934.00	42.5 PK	74.0	-31.5	1.09 H	330	40.1	2.4
6	4934.00	29.8 AV	54.0	-24.2	1.09 H	330	27.4	2.4
7	7401.00	48.2 PK	74.0	-25.8	1.06 H	197	40.3	7.9
8	7401.00	35.0 AV	54.0	-19.0	1.06 H	197	27.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	113.3 PK			1.76 V	33	115.7	-2.4
2	*2467.00	101.7 AV			1.76 V	33	104.1	-2.4
3	2483.50	65.1 PK	74.0	-8.9	1.76 V	33	67.5	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.76 V	33	54.3	-2.4
5	4934.00	44.0 PK	74.0	-30.0	1.84 V	87	41.6	2.4
6	4934.00	33.4 AV	54.0	-20.6	1.84 V	87	31.0	2.4
7	7401.00	50.2 PK	74.0	-23.8	3.10 V	83	42.3	7.9
8	7401.00	38.5 AV	54.0	-15.5	3.10 V	83	30.6	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.9 PK			2.85 H	133	107.3	-2.4
2	*2472.00	92.7 AV			2.85 H	133	95.1	-2.4
3	2483.50	72.3 PK	74.0	-1.7	2.85 H	133	74.7	-2.4
4	2483.50	47.9 AV	54.0	-6.1	2.85 H	133	50.3	-2.4
5	4944.00	42.5 PK	74.0	-31.5	1.05 H	331	40.1	2.4
6	4944.00	29.7 AV	54.0	-24.3	1.05 H	331	27.3	2.4
7	7416.00	48.2 PK	74.0	-25.8	1.11 H	182	40.2	8.0
8	7416.00	35.1 AV	54.0	-18.9	1.11 H	182	27.1	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	110.5 PK			1.50 V	209	112.9	-2.4
2	*2472.00	99.6 AV			1.50 V	209	102.0	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.50 V	209	74.8	-2.4
4	2483.50	51.0 AV	54.0	-3.0	1.50 V	209	53.4	-2.4
5	4944.00	43.7 PK	74.0	-30.3	1.80 V	77	41.3	2.4
6	4944.00	33.1 AV	54.0	-20.9	1.80 V	77	30.7	2.4
7	7416.00	50.3 PK	74.0	-23.7	3.14 V	87	42.3	8.0
8	7416.00	38.5 AV	54.0	-15.5	3.14 V	87	30.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	2.96 H	132	60.2	-2.0
2	2390.00	44.4 AV	54.0	-9.6	2.96 H	132	46.4	-2.0
3	*2422.00	102.9 PK			2.96 H	132	105.0	-2.1
4	*2422.00	89.7 AV			2.96 H	132	91.8	-2.1
5	4844.00	40.2 PK	74.0	-33.8	1.25 H	325	38.0	2.2
6	4844.00	28.5 AV	54.0	-25.5	1.25 H	325	26.3	2.2
7	7266.00	45.3 PK	74.0	-28.7	1.23 H	188	37.7	7.6
8	7266.00	33.6 AV	54.0	-20.4	1.23 H	188	26.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.84 V	37	71.9	-2.0
2	2390.00	52.2 AV	54.0	-1.8	1.84 V	37	54.2	-2.0
3	*2422.00	111.3 PK			1.84 V	37	113.4	-2.1
4	*2422.00	98.7 AV			1.84 V	37	100.8	-2.1
5	4844.00	41.1 PK	74.0	-32.9	1.94 V	87	38.9	2.2
6	4844.00	29.5 AV	54.0	-24.5	1.94 V	87	27.3	2.2
7	7266.00	46.1 PK	74.0	-27.9	1.77 V	108	38.5	7.6
8	7266.00	34.6 AV	54.0	-19.4	1.77 V	108	27.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	2.90 H	132	61.3	-2.0
2	2390.00	45.4 AV	54.0	-8.6	2.90 H	132	47.4	-2.0
3	*2437.00	103.8 PK			2.90 H	132	105.9	-2.1
4	*2437.00	90.8 AV			2.90 H	132	92.9	-2.1
5	2483.50	62.4 PK	74.0	-11.6	2.90 H	132	64.8	-2.4
6	2483.50	47.9 AV	54.0	-6.1	2.90 H	132	50.3	-2.4
7	4874.00	40.1 PK	74.0	-33.9	1.25 H	333	37.7	2.4
8	4874.00	28.2 AV	54.0	-25.8	1.25 H	333	25.8	2.4
9	7311.00	44.8 PK	74.0	-29.2	1.28 H	180	37.4	7.4
10	7311.00	33.2 AV	54.0	-20.8	1.28 H	180	25.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.47 V	147	70.2	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.47 V	147	54.4	-2.0
3	*2437.00	111.1 PK			1.47 V	147	113.2	-2.1
4	*2437.00	99.7 AV			1.47 V	147	101.8	-2.1
5	2483.50	70.8 PK	74.0	-3.2	1.47 V	147	73.2	-2.4
6	2483.50	52.3 AV	54.0	-1.7	1.47 V	147	54.7	-2.4
7	4874.00	41.6 PK	74.0	-32.4	1.94 V	74	39.2	2.4
8	4874.00	29.7 AV	54.0	-24.3	1.94 V	74	27.3	2.4
9	7311.00	46.4 PK	74.0	-27.6	1.76 V	101	39.0	7.4
10	7311.00	35.0 AV	54.0	-19.0	1.76 V	101	27.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	102.7 PK			2.93 H	133	104.9	-2.2
2	*2452.00	90.4 AV			2.93 H	133	92.6	-2.2
3	2483.50	63.1 PK	74.0	-10.9	2.93 H	133	65.5	-2.4
4	2483.50	46.0 AV	54.0	-8.0	2.93 H	133	48.4	-2.4
5	4904.00	40.2 PK	74.0	-33.8	1.31 H	335	37.7	2.5
6	4904.00	28.7 AV	54.0	-25.3	1.31 H	335	26.2	2.5
7	7356.00	45.2 PK	74.0	-28.8	1.22 H	195	37.7	7.5
8	7356.00	33.3 AV	54.0	-20.7	1.22 H	195	25.8	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	111.1 PK			1.32 V	149	113.3	-2.2
2	*2452.00	98.9 AV			1.32 V	149	101.1	-2.2
3	2483.50	68.3 PK	74.0	-5.7	1.32 V	149	70.7	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.32 V	149	54.8	-2.4
5	4904.00	41.4 PK	74.0	-32.6	1.98 V	96	38.9	2.5
6	4904.00	29.9 AV	54.0	-24.1	1.98 V	96	27.4	2.5
7	7356.00	45.8 PK	74.0	-28.2	1.75 V	98	38.3	7.5
8	7356.00	34.3 AV	54.0	-19.7	1.75 V	98	26.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	103.7 PK			2.91 H	131	106.1	-2.4
2	*2457.00	89.9 AV			2.91 H	131	92.3	-2.4
3	2483.50	61.0 PK	74.0	-13.0	2.91 H	131	63.4	-2.4
4	2483.50	46.5 AV	54.0	-7.5	2.91 H	131	48.9	-2.4
5	4914.00	40.0 PK	74.0	-34.0	1.32 H	342	37.5	2.5
6	4914.00	28.6 AV	54.0	-25.4	1.32 H	342	26.1	2.5
7	7371.00	45.5 PK	74.0	-28.5	1.21 H	191	37.9	7.6
8	7371.00	33.3 AV	54.0	-20.7	1.21 H	191	25.7	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	110.2 PK			1.78 V	148	112.6	-2.4
2	*2457.00	98.1 AV			1.78 V	148	100.5	-2.4
3	2483.50	65.9 PK	74.0	-8.1	1.78 V	148	68.3	-2.4
4	2483.50	51.6 AV	54.0	-2.4	1.78 V	148	54.0	-2.4
5	4914.00	40.9 PK	74.0	-33.1	1.95 V	111	38.4	2.5
6	4914.00	29.5 AV	54.0	-24.5	1.95 V	111	27.0	2.5
7	7371.00	45.4 PK	74.0	-28.6	1.75 V	114	37.8	7.6
8	7371.00	33.8 AV	54.0	-20.2	1.75 V	114	26.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.8 PK			2.93 H	133	104.2	-2.4
2	*2462.00	89.7 AV			2.93 H	133	92.1	-2.4
3	2483.50	67.1 PK	74.0	-6.9	2.93 H	133	69.5	-2.4
4	2483.50	46.3 AV	54.0	-7.7	2.93 H	133	48.7	-2.4
5	4924.00	40.0 PK	74.0	-34.0	1.32 H	338	37.5	2.5
6	4924.00	28.6 AV	54.0	-25.4	1.32 H	338	26.1	2.5
7	7386.00	45.3 PK	74.0	-28.7	1.26 H	194	37.6	7.7
8	7386.00	33.0 AV	54.0	-21.0	1.26 H	194	25.3	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.2 PK			1.50 V	337	111.6	-2.4
2	*2462.00	97.6 AV			1.50 V	337	100.0	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.50 V	337	74.8	-2.4
4	2483.50	51.1 AV	54.0	-2.9	1.50 V	337	53.5	-2.4
5	4924.00	40.6 PK	74.0	-33.4	2.00 V	115	38.1	2.5
6	4924.00	29.4 AV	54.0	-24.6	2.00 V	115	26.9	2.5
7	7386.00	45.5 PK	74.0	-28.5	1.70 V	109	37.8	7.7
8	7386.00	33.8 AV	54.0	-20.2	1.70 V	109	26.1	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.20 H	44	58.9	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.20 H	44	46.5	-2.0
3	*2412.00	105.6 PK			1.20 H	44	107.7	-2.1
4	*2412.00	94.3 AV			1.20 H	44	96.4	-2.1
5	4824.00	40.0 PK	74.0	-34.0	1.40 H	323	37.9	2.1
6	4824.00	28.3 AV	54.0	-25.7	1.40 H	323	26.2	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.50 V	121	74.4	-2.0
2	2390.00	45.4 AV	54.0	-8.6	1.50 V	121	47.4	-2.0
3	*2412.00	120.2 PK			1.50 V	121	122.3	-2.1
4	*2412.00	108.9 AV			1.50 V	121	111.0	-2.1
5	4824.00	52.0 PK	74.0	-22.0	2.53 V	117	49.9	2.1
6	4824.00	39.1 AV	54.0	-14.9	2.53 V	117	37.0	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	1.21 H	44	68.0	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.21 H	44	46.5	-2.0
3	*2417.00	109.1 PK			1.21 H	44	111.2	-2.1
4	*2417.00	97.6 AV			1.21 H	44	99.7	-2.1
5	4834.00	40.0 PK	74.0	-34.0	1.32 H	322	37.9	2.1
6	4834.00	28.7 AV	54.0	-25.3	1.32 H	322	26.6	2.1
7	7251.00	45.5 PK	74.0	-28.5	1.35 H	211	37.9	7.6
8	7251.00	33.6 AV	54.0	-20.4	1.35 H	211	26.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.49 V	122	74.4	-2.0
2	2390.00	46.2 AV	54.0	-7.8	1.49 V	122	48.2	-2.0
3	*2417.00	121.1 PK			1.49 V	122	123.2	-2.1
4	*2417.00	111.5 AV			1.49 V	122	113.6	-2.1
5	4834.00	52.5 PK	74.0	-21.5	2.54 V	119	50.4	2.1
6	4834.00	39.3 AV	54.0	-14.7	2.54 V	119	37.2	2.1
7	7251.00	55.6 PK	74.0	-18.4	1.60 V	87	48.0	7.6
8	7251.00	40.6 AV	54.0	-13.4	1.60 V	87	33.0	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	1.40 H	43	61.2	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.40 H	43	46.6	-2.0
3	*2437.00	110.9 PK			1.40 H	43	113.0	-2.1
4	*2437.00	98.1 AV			1.40 H	43	100.2	-2.1
5	2483.50	57.3 PK	74.0	-16.7	1.40 H	43	59.7	-2.4
6	2483.50	44.1 AV	54.0	-9.9	1.40 H	43	46.5	-2.4
7	4874.00	40.2 PK	74.0	-33.8	1.36 H	334	37.8	2.4
8	4874.00	28.7 AV	54.0	-25.3	1.36 H	334	26.3	2.4
9	7311.00	45.7 PK	74.0	-28.3	1.29 H	202	38.3	7.4
10	7311.00	34.0 AV	54.0	-20.0	1.29 H	202	26.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	1.69 V	122	74.1	-2.0
2	2390.00	45.7 AV	54.0	-8.3	1.69 V	122	47.7	-2.0
3	*2437.00	122.9 PK			1.69 V	122	125.0	-2.1
4	*2437.00	111.8 AV			1.69 V	122	113.9	-2.1
5	2483.50	60.5 PK	74.0	-13.5	1.69 V	122	62.9	-2.4
6	2483.50	44.9 AV	54.0	-9.1	1.69 V	122	47.3	-2.4
7	4874.00	53.2 PK	74.0	-20.8	2.48 V	122	50.8	2.4
8	4874.00	39.8 AV	54.0	-14.2	2.48 V	122	37.4	2.4
9	7311.00	56.8 PK	74.0	-17.2	1.55 V	73	49.4	7.4
10	7311.00	41.2 AV	54.0	-12.8	1.55 V	73	33.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.5 PK			1.45 H	44	110.9	-2.4
2	*2457.00	97.6 AV			1.45 H	44	100.0	-2.4
3	2483.50	69.6 PK	74.0	-4.4	1.45 H	44	72.0	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.45 H	44	47.0	-2.4
5	4914.00	40.3 PK	74.0	-33.7	1.35 H	320	37.8	2.5
6	4914.00	28.5 AV	54.0	-25.5	1.35 H	320	26.0	2.5
7	7371.00	46.2 PK	74.0	-27.8	1.33 H	194	38.6	7.6
8	7371.00	34.4 AV	54.0	-19.6	1.33 H	194	26.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	120.4 PK			1.20 V	200	122.8	-2.4
2	*2457.00	111.6 AV			1.20 V	200	114.0	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.20 V	200	74.6	-2.4
4	2483.50	49.0 AV	54.0	-5.0	1.20 V	200	51.4	-2.4
5	4914.00	52.6 PK	74.0	-21.4	2.48 V	113	50.1	2.5
6	4914.00	39.4 AV	54.0	-14.6	2.48 V	113	36.9	2.5
7	7371.00	56.6 PK	74.0	-17.4	1.51 V	61	49.0	7.6
8	7371.00	41.2 AV	54.0	-12.8	1.51 V	61	33.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.9 PK			1.44 H	44	110.3	-2.4
2	*2462.00	97.9 AV			1.44 H	44	100.3	-2.4
3	2483.50	62.0 PK	74.0	-12.0	1.44 H	44	64.4	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.44 H	44	46.9	-2.4
5	4924.00	39.8 PK	74.0	-34.2	1.32 H	312	37.3	2.5
6	4924.00	28.3 AV	54.0	-25.7	1.32 H	312	25.8	2.5
7	7386.00	45.7 PK	74.0	-28.3	1.30 H	185	38.0	7.7
8	7386.00	33.9 AV	54.0	-20.1	1.30 H	185	26.2	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.6 PK			1.63 V	126	123.0	-2.4
2	*2462.00	110.4 AV			1.63 V	126	112.8	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.00 V	0	73.9	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.00 V	0	49.2	-2.4
5	4924.00	52.4 PK	74.0	-21.6	2.50 V	119	49.9	2.5
6	4924.00	39.3 AV	54.0	-14.7	2.50 V	119	36.8	2.5
7	7386.00	56.9 PK	74.0	-17.1	1.57 V	70	49.2	7.7
8	7386.00	41.5 AV	54.0	-12.5	1.57 V	70	33.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.5 PK			1.41 H	44	109.9	-2.4
2	*2467.00	97.2 AV			1.41 H	44	99.6	-2.4
3	2483.50	64.4 PK	74.0	-9.6	1.41 H	44	66.8	-2.4
4	2483.50	44.9 AV	54.0	-9.1	1.41 H	44	47.3	-2.4
5	4934.00	39.6 PK	74.0	-34.4	1.30 H	316	37.2	2.4
6	4934.00	28.2 AV	54.0	-25.8	1.30 H	316	25.8	2.4
7	7401.00	45.8 PK	74.0	-28.2	1.34 H	176	37.9	7.9
8	7401.00	33.8 AV	54.0	-20.2	1.34 H	176	25.9	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	120.0 PK			1.58 V	125	122.4	-2.4
2	*2467.00	109.3 AV			1.58 V	125	111.7	-2.4
3	2483.50	70.8 PK	74.0	-3.2	1.58 V	125	73.2	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.58 V	125	49.2	-2.4
5	4934.00	52.1 PK	74.0	-21.9	2.44 V	125	49.7	2.4
6	4934.00	38.8 AV	54.0	-15.2	2.44 V	125	36.4	2.4
7	7401.00	56.8 PK	74.0	-17.2	1.52 V	85	48.9	7.9
8	7401.00	41.1 AV	54.0	-12.9	1.52 V	85	33.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.6 PK			1.67 H	43	107.0	-2.4
2	*2472.00	94.4 AV			1.67 H	43	96.8	-2.4
3	2483.50	59.4 PK	74.0	-14.6	1.67 H	43	61.8	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.67 H	43	47.2	-2.4
5	4944.00	39.6 PK	74.0	-34.4	1.25 H	316	37.2	2.4
6	4944.00	28.2 AV	54.0	-25.8	1.25 H	316	25.8	2.4
7	7416.00	45.3 PK	74.0	-28.7	1.39 H	181	37.3	8.0
8	7416.00	33.6 AV	54.0	-20.4	1.39 H	181	25.6	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.9 PK			1.20 V	216	119.3	-2.4
2	*2472.00	105.0 AV			1.20 V	216	107.4	-2.4
3	2483.50	72.1 PK	74.0	-1.9	1.20 V	216	74.5	-2.4
4	2483.50	48.9 AV	54.0	-5.1	1.20 V	216	51.3	-2.4
5	4944.00	51.8 PK	74.0	-22.2	2.41 V	117	49.4	2.4
6	4944.00	38.7 AV	54.0	-15.3	2.41 V	117	36.3	2.4
7	7416.00	56.8 PK	74.0	-17.2	1.51 V	85	48.8	8.0
8	7416.00	41.2 AV	54.0	-12.8	1.51 V	85	33.2	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	1.16 H	44	61.7	-2.0
2	2390.00	44.7 AV	54.0	-9.3	1.16 H	44	46.7	-2.0
3	*2412.00	105.2 PK			1.16 H	44	107.3	-2.1
4	*2412.00	94.2 AV			1.16 H	44	96.3	-2.1
5	4824.00	40.9 PK	74.0	-33.1	1.45 H	329	38.8	2.1
6	4824.00	31.7 AV	54.0	-22.3	1.45 H	329	29.6	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.83 V	125	74.3	-2.0
2	2390.00	47.4 AV	54.0	-6.6	1.83 V	125	49.4	-2.0
3	*2412.00	119.4 PK			1.83 V	125	121.5	-2.1
4	*2412.00	108.6 AV			1.83 V	125	110.7	-2.1
5	4824.00	48.8 PK	74.0	-25.2	2.60 V	123	46.7	2.1
6	4824.00	37.0 AV	54.0	-17.0	2.60 V	123	34.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.25 H	43	59.7	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.25 H	43	46.5	-2.0
3	*2417.00	104.6 PK			1.25 H	43	106.7	-2.1
4	*2417.00	93.7 AV			1.25 H	43	95.8	-2.1
5	4834.00	40.7 PK	74.0	-33.3	1.51 H	327	38.6	2.1
6	4834.00	31.7 AV	54.0	-22.3	1.51 H	327	29.6	2.1
7	7251.00	45.7 PK	74.0	-28.3	1.24 H	175	38.1	7.6
8	7251.00	34.4 AV	54.0	-19.6	1.24 H	175	26.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.79 V	125	70.1	-2.0
2	2390.00	45.7 AV	54.0	-8.3	1.79 V	125	47.7	-2.0
3	*2417.00	118.8 PK			1.79 V	125	120.9	-2.1
4	*2417.00	107.7 AV			1.79 V	125	109.8	-2.1
5	4834.00	49.1 PK	74.0	-24.9	2.64 V	129	47.0	2.1
6	4834.00	37.2 AV	54.0	-16.8	2.64 V	129	35.1	2.1
7	7251.00	52.6 PK	74.0	-21.4	1.68 V	71	45.0	7.6
8	7251.00	37.9 AV	54.0	-16.1	1.68 V	71	30.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.40 H	44	60.1	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.40 H	44	46.6	-2.0
3	*2437.00	107.8 PK			1.40 H	44	109.9	-2.1
4	*2437.00	96.5 AV			1.40 H	44	98.6	-2.1
5	2483.50	57.3 PK	74.0	-16.7	1.40 H	44	59.7	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.40 H	44	46.6	-2.4
7	4874.00	41.5 PK	74.0	-32.5	1.51 H	317	39.1	2.4
8	4874.00	32.2 AV	54.0	-21.8	1.51 H	317	29.8	2.4
9	7311.00	46.2 PK	74.0	-27.8	1.24 H	189	38.8	7.4
10	7311.00	34.7 AV	54.0	-19.3	1.24 H	189	27.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.69 V	126	73.4	-2.0
2	2390.00	46.2 AV	54.0	-7.8	1.69 V	126	48.2	-2.0
3	*2437.00	121.4 PK			1.69 V	126	123.5	-2.1
4	*2437.00	110.7 AV			1.69 V	126	112.8	-2.1
5	2483.50	67.0 PK	74.0	-7.0	1.69 V	126	69.4	-2.4
6	2483.50	45.0 AV	54.0	-9.0	1.69 V	126	47.4	-2.4
7	4874.00	48.8 PK	74.0	-25.2	2.66 V	131	46.4	2.4
8	4874.00	37.1 AV	54.0	-16.9	2.66 V	131	34.7	2.4
9	7311.00	52.2 PK	74.0	-21.8	1.73 V	67	44.8	7.4
10	7311.00	37.7 AV	54.0	-16.3	1.73 V	67	30.3	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	103.2 PK			1.46 H	44	105.6	-2.4
2	*2457.00	92.8 AV			1.46 H	44	95.2	-2.4
3	2483.50	56.7 PK	74.0	-17.3	1.46 H	44	59.1	-2.4
4	2483.50	44.3 AV	54.0	-9.7	1.46 H	44	46.7	-2.4
5	4914.00	40.4 PK	74.0	-33.6	1.46 H	312	37.9	2.5
6	4914.00	31.7 AV	54.0	-22.3	1.46 H	312	29.2	2.5
7	7371.00	45.4 PK	74.0	-28.6	1.19 H	177	37.8	7.6
8	7371.00	34.2 AV	54.0	-19.8	1.19 H	177	26.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.6 PK			1.69 V	126	121.0	-2.4
2	*2457.00	105.7 AV			1.69 V	126	108.1	-2.4
3	2483.50	65.3 PK	74.0	-8.7	1.69 V	126	67.7	-2.4
4	2483.50	45.0 AV	54.0	-9.0	1.69 V	126	47.4	-2.4
5	4914.00	48.4 PK	74.0	-25.6	2.67 V	126	45.9	2.5
6	4914.00	36.7 AV	54.0	-17.3	2.67 V	126	34.2	2.5
7	7371.00	52.0 PK	74.0	-22.0	1.76 V	72	44.4	7.6
8	7371.00	37.5 AV	54.0	-16.5	1.76 V	72	29.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.1 PK			1.45 H	45	105.5	-2.4
2	*2462.00	92.5 AV			1.45 H	45	94.9	-2.4
3	2483.50	56.6 PK	74.0	-17.4	1.45 H	45	59.0	-2.4
4	2483.50	44.3 AV	54.0	-9.7	1.45 H	45	46.7	-2.4
5	4924.00	39.9 PK	74.0	-34.1	1.44 H	323	37.4	2.5
6	4924.00	31.3 AV	54.0	-22.7	1.44 H	323	28.8	2.5
7	7386.00	45.4 PK	74.0	-28.6	1.13 H	185	37.7	7.7
8	7386.00	34.5 AV	54.0	-19.5	1.13 H	185	26.8	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.3 PK			1.60 V	125	119.7	-2.4
2	*2462.00	105.1 AV			1.60 V	125	107.5	-2.4
3	2483.50	70.0 PK	74.0	-4.0	1.60 V	125	72.4	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.60 V	125	47.8	-2.4
5	4924.00	48.0 PK	74.0	-26.0	2.65 V	110	45.5	2.5
6	4924.00	36.5 AV	54.0	-17.5	2.65 V	110	34.0	2.5
7	7386.00	51.7 PK	74.0	-22.3	1.78 V	59	44.0	7.7
8	7386.00	37.2 AV	54.0	-16.8	1.78 V	59	29.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.1 PK			1.38 H	44	106.5	-2.4
2	*2467.00	92.7 AV			1.38 H	44	95.1	-2.4
3	2483.50	56.2 PK	74.0	-17.8	1.38 H	44	58.6	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.38 H	44	46.6	-2.4
5	4934.00	39.8 PK	74.0	-34.2	1.41 H	319	37.4	2.4
6	4934.00	31.1 AV	54.0	-22.9	1.41 H	319	28.7	2.4
7	7401.00	45.6 PK	74.0	-28.4	1.15 H	200	37.7	7.9
8	7401.00	34.9 AV	54.0	-19.1	1.15 H	200	27.0	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.1 PK			1.61 V	125	118.5	-2.4
2	*2467.00	105.5 AV			1.61 V	125	107.9	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.61 V	125	74.0	-2.4
4	2483.50	46.8 AV	54.0	-7.2	1.61 V	125	49.2	-2.4
5	4934.00	47.7 PK	74.0	-26.3	2.63 V	97	45.3	2.4
6	4934.00	36.1 AV	54.0	-17.9	2.63 V	97	33.7	2.4
7	7401.00	51.5 PK	74.0	-22.5	1.75 V	70	43.6	7.9
8	7401.00	37.2 AV	54.0	-16.8	1.75 V	70	29.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.1 PK			1.66 H	44	103.5	-2.4
2	*2472.00	90.0 AV			1.66 H	44	92.4	-2.4
3	2483.50	57.8 PK	74.0	-16.2	1.66 H	44	60.2	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.66 H	44	47.0	-2.4
5	4944.00	39.4 PK	74.0	-34.6	1.47 H	317	37.0	2.4
6	4944.00	30.9 AV	54.0	-23.1	1.47 H	317	28.5	2.4
7	7416.00	45.7 PK	74.0	-28.3	1.08 H	192	37.7	8.0
8	7416.00	34.7 AV	54.0	-19.3	1.08 H	192	26.7	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.3 PK			1.64 V	217	116.7	-2.4
2	*2472.00	102.6 AV			1.64 V	217	105.0	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.64 V	217	74.1	-2.4
4	2483.50	50.4 AV	54.0	-3.6	1.64 V	217	52.8	-2.4
5	4944.00	47.7 PK	74.0	-26.3	2.59 V	105	45.3	2.4
6	4944.00	35.8 AV	54.0	-18.2	2.59 V	105	33.4	2.4
7	7416.00	51.5 PK	74.0	-22.5	1.75 V	60	43.5	8.0
8	7416.00	36.9 AV	54.0	-17.1	1.75 V	60	28.9	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.6 PK	74.0	-11.4	1.19 H	44	64.6	-2.0
2	2390.00	44.7 AV	54.0	-9.3	1.19 H	44	46.7	-2.0
3	*2412.00	103.6 PK			1.19 H	44	105.7	-2.1
4	*2412.00	91.5 AV			1.19 H	44	93.6	-2.1
5	4824.00	40.2 PK	74.0	-33.8	1.62 H	308	38.1	2.1
6	4824.00	29.6 AV	54.0	-24.4	1.62 H	308	27.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.77 V	125	74.4	-2.0
2	2390.00	49.0 AV	54.0	-5.0	1.77 V	125	51.0	-2.0
3	*2412.00	117.8 PK			1.77 V	125	119.9	-2.1
4	*2412.00	105.8 AV			1.77 V	125	107.9	-2.1
5	4824.00	44.7 PK	74.0	-29.3	2.61 V	116	42.6	2.1
6	4824.00	34.7 AV	54.0	-19.3	2.61 V	116	32.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.72 H	43	59.5	-2.0
2	2390.00	44.4 AV	54.0	-9.6	1.72 H	43	46.4	-2.0
3	*2417.00	103.4 PK			1.72 H	43	105.5	-2.1
4	*2417.00	91.2 AV			1.72 H	43	93.3	-2.1
5	4834.00	40.3 PK	74.0	-33.7	1.57 H	305	38.2	2.1
6	4834.00	29.7 AV	54.0	-24.3	1.57 H	305	27.6	2.1
7	7251.00	45.6 PK	74.0	-28.4	1.00 H	201	38.0	7.6
8	7251.00	33.3 AV	54.0	-20.7	1.00 H	201	25.7	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.76 V	123	71.1	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.76 V	123	48.5	-2.0
3	*2417.00	117.5 PK			1.76 V	123	119.6	-2.1
4	*2417.00	105.6 AV			1.76 V	123	107.7	-2.1
5	4834.00	45.2 PK	74.0	-28.8	2.57 V	124	43.1	2.1
6	4834.00	35.1 AV	54.0	-18.9	2.57 V	124	33.0	2.1
7	7251.00	50.3 PK	74.0	-23.7	1.74 V	60	42.7	7.6
8	7251.00	37.4 AV	54.0	-16.6	1.74 V	60	29.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	1.74 H	43	62.3	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.74 H	43	46.6	-2.0
3	*2437.00	105.8 PK			1.74 H	43	107.9	-2.1
4	*2437.00	93.2 AV			1.74 H	43	95.3	-2.1
5	2483.50	56.8 PK	74.0	-17.2	1.74 H	43	59.2	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.74 H	43	46.6	-2.4
7	4874.00	40.0 PK	74.0	-34.0	1.54 H	318	37.6	2.4
8	4874.00	30.1 AV	54.0	-23.9	1.54 H	318	27.7	2.4
9	7311.00	45.8 PK	74.0	-28.2	1.04 H	190	38.4	7.4
10	7311.00	33.7 AV	54.0	-20.3	1.04 H	190	26.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.69 V	126	74.2	-2.0
2	2390.00	46.3 AV	54.0	-7.7	1.69 V	126	48.3	-2.0
3	*2437.00	118.5 PK			1.69 V	126	120.6	-2.1
4	*2437.00	107.3 AV			1.69 V	126	109.4	-2.1
5	2483.50	62.7 PK	74.0	-11.3	1.69 V	126	65.1	-2.4
6	2483.50	45.0 AV	54.0	-9.0	1.69 V	126	47.4	-2.4
7	4874.00	45.6 PK	74.0	-28.4	2.62 V	116	43.2	2.4
8	4874.00	35.5 AV	54.0	-18.5	2.62 V	116	33.1	2.4
9	7311.00	50.9 PK	74.0	-23.1	1.75 V	73	43.5	7.4
10	7311.00	37.8 AV	54.0	-16.2	1.75 V	73	30.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	103.0 PK			1.46 H	43	105.4	-2.4
2	*2457.00	90.8 AV			1.46 H	43	93.2	-2.4
3	2483.50	56.3 PK	74.0	-17.7	1.46 H	43	58.7	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.46 H	43	46.6	-2.4
5	4914.00	40.2 PK	74.0	-33.8	1.51 H	292	37.7	2.5
6	4914.00	29.8 AV	54.0	-24.2	1.51 H	292	27.3	2.5
7	7371.00	45.3 PK	74.0	-28.7	1.05 H	201	37.7	7.6
8	7371.00	33.1 AV	54.0	-20.9	1.05 H	201	25.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.6 PK			1.69 V	126	119.0	-2.4
2	*2457.00	104.4 AV			1.69 V	126	106.8	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.69 V	126	73.6	-2.4
4	2483.50	46.3 AV	54.0	-7.7	1.69 V	126	48.7	-2.4
5	4914.00	44.6 PK	74.0	-29.4	2.61 V	117	42.1	2.5
6	4914.00	34.8 AV	54.0	-19.2	2.61 V	117	32.3	2.5
7	7371.00	50.5 PK	74.0	-23.5	1.73 V	65	42.9	7.6
8	7371.00	37.5 AV	54.0	-16.5	1.73 V	65	29.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.5 PK			1.45 H	44	104.9	-2.4
2	*2462.00	90.2 AV			1.45 H	44	92.6	-2.4
3	2483.50	57.3 PK	74.0	-16.7	1.45 H	44	59.7	-2.4
4	2483.50	44.3 AV	54.0	-9.7	1.45 H	44	46.7	-2.4
5	4924.00	40.1 PK	74.0	-33.9	1.61 H	293	37.6	2.5
6	4924.00	29.6 AV	54.0	-24.4	1.61 H	293	27.1	2.5
7	7386.00	45.3 PK	74.0	-28.7	1.00 H	208	37.6	7.7
8	7386.00	33.2 AV	54.0	-20.8	1.00 H	208	25.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.8 PK			1.65 V	125	117.2	-2.4
2	*2462.00	103.7 AV			1.65 V	125	106.1	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.65 V	206	73.7	-2.4
4	2483.50	46.7 AV	54.0	-7.3	1.65 V	206	49.1	-2.4
5	4924.00	44.4 PK	74.0	-29.6	2.58 V	109	41.9	2.5
6	4924.00	34.6 AV	54.0	-19.4	2.58 V	109	32.1	2.5
7	7386.00	50.3 PK	74.0	-23.7	1.69 V	80	42.6	7.7
8	7386.00	37.5 AV	54.0	-16.5	1.69 V	80	29.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	102.8 PK			1.44 H	45	105.2	-2.4
2	*2467.00	90.7 AV			1.44 H	45	93.1	-2.4
3	2483.50	64.4 PK	74.0	-9.6	1.44 H	45	66.8	-2.4
4	2483.50	44.7 AV	54.0	-9.3	1.44 H	45	47.1	-2.4
5	4934.00	40.3 PK	74.0	-33.7	1.48 H	283	37.9	2.4
6	4934.00	29.7 AV	54.0	-24.3	1.48 H	283	27.3	2.4
7	7401.00	45.1 PK	74.0	-28.9	1.01 H	206	37.2	7.9
8	7401.00	33.1 AV	54.0	-20.9	1.01 H	206	25.2	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.2 PK			1.68 V	127	118.6	-2.4
2	*2467.00	103.8 AV			1.68 V	127	106.2	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.68 V	127	74.6	-2.4
4	2483.50	51.0 AV	54.0	-3.0	1.68 V	127	53.4	-2.4
5	4934.00	44.4 PK	74.0	-29.6	2.65 V	126	42.0	2.4
6	4934.00	34.8 AV	54.0	-19.2	2.65 V	126	32.4	2.4
7	7401.00	51.1 PK	74.0	-22.9	1.79 V	69	43.2	7.9
8	7401.00	37.9 AV	54.0	-16.1	1.79 V	69	30.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.7 PK			1.68 H	44	102.1	-2.4
2	*2472.00	88.0 AV			1.68 H	44	90.4	-2.4
3	2483.50	56.3 PK	74.0	-17.7	1.68 H	44	58.7	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.68 H	44	46.9	-2.4
5	4944.00	40.3 PK	74.0	-33.7	1.47 H	268	37.9	2.4
6	4944.00	29.6 AV	54.0	-24.4	1.47 H	268	27.2	2.4
7	7416.00	45.8 PK	74.0	-28.2	1.06 H	218	37.8	8.0
8	7416.00	33.5 AV	54.0	-20.5	1.06 H	218	25.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.7 PK			1.65 V	127	115.1	-2.4
2	*2472.00	100.8 AV			1.65 V	127	103.2	-2.4
3	2483.50	67.4 PK	74.0	-6.6	1.65 V	127	69.8	-2.4
4	2483.50	49.4 AV	54.0	-4.6	1.65 V	127	51.8	-2.4
5	4944.00	44.0 PK	74.0	-30.0	2.65 V	125	41.6	2.4
6	4944.00	34.5 AV	54.0	-19.5	2.65 V	125	32.1	2.4
7	7416.00	51.2 PK	74.0	-22.8	1.82 V	70	43.2	8.0
8	7416.00	37.8 AV	54.0	-16.2	1.82 V	70	29.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.65 H	96	66.5	-2.0
2	2390.00	44.4 AV	54.0	-9.6	1.65 H	96	46.4	-2.0
3	*2412.00	107.7 PK			1.65 H	96	109.8	-2.1
4	*2412.00	96.0 AV			1.65 H	96	98.1	-2.1
5	4824.00	41.3 PK	74.0	-32.7	1.34 H	292	39.2	2.1
6	4824.00	30.8 AV	54.0	-23.2	1.34 H	292	28.7	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.49 V	123	73.6	-2.0
2	2390.00	46.7 AV	54.0	-7.3	1.49 V	123	48.7	-2.0
3	*2412.00	119.9 PK			1.49 V	123	122.0	-2.1
4	*2412.00	107.7 AV			1.49 V	123	109.8	-2.1
5	4824.00	47.4 PK	74.0	-26.6	2.44 V	129	45.3	2.1
6	4824.00	36.4 AV	54.0	-17.6	2.44 V	129	34.3	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	2.20 H	93	62.3	-2.0
2	2390.00	44.3 AV	54.0	-9.7	2.20 H	93	46.3	-2.0
3	*2417.00	106.0 PK			2.20 H	93	108.1	-2.1
4	*2417.00	94.8 AV			2.20 H	93	96.9	-2.1
5	4834.00	41.5 PK	74.0	-32.5	1.33 H	289	39.4	2.1
6	4834.00	30.8 AV	54.0	-23.2	1.33 H	289	28.7	2.1
7	7251.00	44.9 PK	74.0	-29.1	1.33 H	261	37.3	7.6
8	7251.00	34.8 AV	54.0	-19.2	1.33 H	261	27.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.43 V	121	74.0	-2.0
2	2390.00	45.8 AV	54.0	-8.2	1.43 V	121	47.8	-2.0
3	*2417.00	117.9 PK			1.43 V	121	120.0	-2.1
4	*2417.00	106.2 AV			1.43 V	121	108.3	-2.1
5	4834.00	47.5 PK	74.0	-26.5	2.47 V	138	45.4	2.1
6	4834.00	36.7 AV	54.0	-17.3	2.47 V	138	34.6	2.1
7	7251.00	49.5 PK	74.0	-24.5	1.77 V	82	41.9	7.6
8	7251.00	37.7 AV	54.0	-16.3	1.77 V	82	30.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.9 PK	74.0	-17.1	1.20 H	116	58.9	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.20 H	116	46.5	-2.0
3	*2437.00	109.7 PK			1.20 H	116	111.8	-2.1
4	*2437.00	98.1 AV			1.20 H	116	100.2	-2.1
5	2483.50	56.0 PK	74.0	-18.0	1.20 H	116	58.4	-2.4
6	2483.50	44.3 AV	54.0	-9.7	1.20 H	116	46.7	-2.4
7	4874.00	41.7 PK	74.0	-32.3	1.38 H	303	39.3	2.4
8	4874.00	31.1 AV	54.0	-22.9	1.38 H	303	28.7	2.4
9	7311.00	45.4 PK	74.0	-28.6	1.37 H	247	38.0	7.4
10	7311.00	35.2 AV	54.0	-18.8	1.37 H	247	27.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.67 V	123	71.1	-2.0
2	2390.00	45.4 AV	54.0	-8.6	1.67 V	123	47.4	-2.0
3	*2437.00	119.5 PK			1.67 V	123	121.6	-2.1
4	*2437.00	108.4 AV			1.67 V	123	110.5	-2.1
5	2483.50	57.5 PK	74.0	-16.5	1.67 V	123	59.9	-2.4
6	2483.50	44.9 AV	54.0	-9.1	1.67 V	123	47.3	-2.4
7	4874.00	47.7 PK	74.0	-26.3	2.52 V	130	45.3	2.4
8	4874.00	36.7 AV	54.0	-17.3	2.52 V	130	34.3	2.4
9	7311.00	49.8 PK	74.0	-24.2	1.74 V	73	42.4	7.4
10	7311.00	38.0 AV	54.0	-16.0	1.74 V	73	30.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.7 PK			1.40 H	118	110.1	-2.4
2	*2457.00	96.5 AV			1.40 H	118	98.9	-2.4
3	2483.50	60.2 PK	74.0	-13.8	1.40 H	118	62.6	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.40 H	118	46.8	-2.4
5	4914.00	41.7 PK	74.0	-32.3	1.29 H	285	39.2	2.5
6	4914.00	30.9 AV	54.0	-23.1	1.29 H	285	28.4	2.5
7	7371.00	44.6 PK	74.0	-29.4	1.36 H	266	37.0	7.6
8	7371.00	34.7 AV	54.0	-19.3	1.36 H	266	27.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	118.8 PK			1.75 V	122	121.2	-2.4
2	*2457.00	106.9 AV			1.75 V	122	109.3	-2.4
3	2483.50	68.6 PK	74.0	-5.4	1.75 V	122	71.0	-2.4
4	2483.50	46.4 AV	54.0	-7.6	1.75 V	122	48.8	-2.4
5	4914.00	47.8 PK	74.0	-26.2	2.51 V	119	45.3	2.5
6	4914.00	36.6 AV	54.0	-17.4	2.51 V	119	34.1	2.5
7	7371.00	49.4 PK	74.0	-24.6	1.70 V	63	41.8	7.6
8	7371.00	37.8 AV	54.0	-16.2	1.70 V	63	30.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.0 PK			1.02 H	117	109.4	-2.4
2	*2462.00	96.1 AV			1.02 H	117	98.5	-2.4
3	2483.50	58.5 PK	74.0	-15.5	1.02 H	117	60.9	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.02 H	117	46.8	-2.4
5	4924.00	41.0 PK	74.0	-33.0	1.32 H	286	38.5	2.5
6	4924.00	30.4 AV	54.0	-23.6	1.32 H	286	27.9	2.5
7	7386.00	45.0 PK	74.0	-29.0	1.33 H	248	37.3	7.7
8	7386.00	34.6 AV	54.0	-19.4	1.33 H	248	26.9	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.0 PK			1.89 V	22	120.4	-2.4
2	*2462.00	105.1 AV			1.89 V	22	107.5	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.89 V	22	74.6	-2.4
4	2483.50	46.0 AV	54.0	-8.0	1.89 V	22	48.4	-2.4
5	4924.00	47.7 PK	74.0	-26.3	2.49 V	116	45.2	2.5
6	4924.00	36.3 AV	54.0	-17.7	2.49 V	116	33.8	2.5
7	7386.00	49.3 PK	74.0	-24.7	1.66 V	79	41.6	7.7
8	7386.00	37.5 AV	54.0	-16.5	1.66 V	79	29.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	105.8 PK			1.34 H	117	108.2	-2.4
2	*2467.00	95.6 AV			1.34 H	117	98.0	-2.4
3	2483.50	56.4 PK	74.0	-17.6	1.34 H	117	58.8	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.34 H	117	46.8	-2.4
5	4934.00	41.0 PK	74.0	-33.0	1.35 H	271	38.6	2.4
6	4934.00	30.2 AV	54.0	-23.8	1.35 H	271	27.8	2.4
7	7401.00	44.8 PK	74.0	-29.2	1.30 H	236	36.9	7.9
8	7401.00	34.5 AV	54.0	-19.5	1.30 H	236	26.6	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.0 PK			1.89 V	21	118.4	-2.4
2	*2467.00	104.9 AV			1.89 V	21	107.3	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.89 V	21	74.0	-2.4
4	2483.50	47.2 AV	54.0	-6.8	1.89 V	21	49.6	-2.4
5	4934.00	47.7 PK	74.0	-26.3	2.46 V	101	45.3	2.4
6	4934.00	36.3 AV	54.0	-17.7	2.46 V	101	33.9	2.4
7	7401.00	48.7 PK	74.0	-25.3	1.64 V	73	40.8	7.9
8	7401.00	37.1 AV	54.0	-16.9	1.64 V	73	29.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.8 PK			1.28 H	114	102.2	-2.4
2	*2472.00	87.7 AV			1.28 H	114	90.1	-2.4
3	2483.50	56.6 PK	74.0	-17.4	1.28 H	114	59.0	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.28 H	114	46.8	-2.4
5	4944.00	40.6 PK	74.0	-33.4	1.34 H	292	38.2	2.4
6	4944.00	30.0 AV	54.0	-24.0	1.34 H	292	27.6	2.4
7	7416.00	45.3 PK	74.0	-28.7	1.36 H	258	37.3	8.0
8	7416.00	35.0 AV	54.0	-19.0	1.36 H	258	27.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.1 PK			1.71 V	21	118.5	-2.4
2	*2472.00	104.1 AV			1.71 V	21	106.5	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.71 V	21	74.8	-2.4
4	2483.50	50.3 AV	54.0	-3.7	1.71 V	21	52.7	-2.4
5	4944.00	47.1 PK	74.0	-26.9	2.47 V	100	44.7	2.4
6	4944.00	36.0 AV	54.0	-18.0	2.47 V	100	33.6	2.4
7	7416.00	48.9 PK	74.0	-25.1	1.69 V	70	40.9	8.0
8	7416.00	37.0 AV	54.0	-17.0	1.69 V	70	29.0	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	1.21 H	43	66.0	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.21 H	43	47.0	-2.0
3	*2412.00	101.3 PK			1.21 H	43	103.4	-2.1
4	*2412.00	90.5 AV			1.21 H	43	92.6	-2.1
5	4824.00	38.6 PK	74.0	-35.4	1.03 H	7	36.5	2.1
6	4824.00	28.6 AV	54.0	-25.4	1.03 H	7	26.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.9 PK	74.0	-4.1	1.50 V	121	71.9	-2.0
2	2390.00	49.3 AV	54.0	-4.7	1.50 V	121	51.3	-2.0
3	*2412.00	117.2 PK			1.50 V	121	119.3	-2.1
4	*2412.00	104.8 AV			1.50 V	121	106.9	-2.1
5	4824.00	46.9 PK	74.0	-27.1	2.71 V	133	44.8	2.1
6	4824.00	35.0 AV	54.0	-19.0	2.71 V	133	32.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.72 H	43	59.0	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.72 H	43	46.5	-2.0
3	*2417.00	102.3 PK			1.72 H	43	104.4	-2.1
4	*2417.00	90.6 AV			1.72 H	43	92.7	-2.1
5	4834.00	39.1 PK	74.0	-34.9	1.07 H	7	37.0	2.1
6	4834.00	29.0 AV	54.0	-25.0	1.07 H	7	26.9	2.1
7	7251.00	45.7 PK	74.0	-28.3	1.17 H	191	38.1	7.6
8	7251.00	33.5 AV	54.0	-20.5	1.17 H	191	25.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.8 PK	74.0	-6.2	1.46 V	122	69.8	-2.0
2	2390.00	47.3 AV	54.0	-6.7	1.46 V	122	49.3	-2.0
3	*2417.00	116.5 PK			1.46 V	122	118.6	-2.1
4	*2417.00	105.2 AV			1.46 V	122	107.3	-2.1
5	4834.00	46.6 PK	74.0	-27.4	2.65 V	131	44.5	2.1
6	4834.00	35.4 AV	54.0	-18.6	2.65 V	131	33.3	2.1
7	7251.00	50.7 PK	74.0	-23.3	1.67 V	57	43.1	7.6
8	7251.00	37.4 AV	54.0	-16.6	1.67 V	57	29.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.1 PK	74.0	-13.9	1.39 H	44	62.1	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.39 H	44	46.6	-2.0
3	*2437.00	104.5 PK			1.39 H	44	106.6	-2.1
4	*2437.00	92.6 AV			1.39 H	44	94.7	-2.1
5	2483.50	56.5 PK	74.0	-17.5	1.39 H	44	58.9	-2.4
6	2483.50	44.1 AV	54.0	-9.9	1.39 H	44	46.5	-2.4
7	4874.00	39.7 PK	74.0	-34.3	1.03 H	5	37.3	2.4
8	4874.00	29.4 AV	54.0	-24.6	1.03 H	5	27.0	2.4
9	7311.00	45.9 PK	74.0	-28.1	1.14 H	188	38.5	7.4
10	7311.00	34.1 AV	54.0	-19.9	1.14 H	188	26.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.64 V	121	69.5	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.64 V	121	48.5	-2.0
3	*2437.00	118.0 PK			1.64 V	121	120.1	-2.1
4	*2437.00	106.8 AV			1.64 V	121	108.9	-2.1
5	2483.50	61.2 PK	74.0	-12.8	1.64 V	121	63.6	-2.4
6	2483.50	45.3 AV	54.0	-8.7	1.64 V	121	47.7	-2.4
7	4874.00	47.3 PK	74.0	-26.7	2.63 V	130	44.9	2.4
8	4874.00	35.8 AV	54.0	-18.2	2.63 V	130	33.4	2.4
9	7311.00	51.0 PK	74.0	-23.0	1.72 V	72	43.6	7.4
10	7311.00	37.5 AV	54.0	-16.5	1.72 V	72	30.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	100.8 PK			1.45 H	43	103.2	-2.4
2	*2457.00	89.2 AV			1.45 H	43	91.6	-2.4
3	2483.50	56.3 PK	74.0	-17.7	1.45 H	43	58.7	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.45 H	43	46.6	-2.4
5	4914.00	38.5 PK	74.0	-35.5	1.05 H	17	36.0	2.5
6	4914.00	28.7 AV	54.0	-25.3	1.05 H	17	26.2	2.5
7	7371.00	45.6 PK	74.0	-28.4	1.23 H	188	38.0	7.6
8	7371.00	33.7 AV	54.0	-20.3	1.23 H	188	26.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	115.8 PK			1.74 V	123	118.2	-2.4
2	*2457.00	103.7 AV			1.74 V	123	106.1	-2.4
3	2483.50	67.7 PK	74.0	-6.3	1.74 V	123	70.1	-2.4
4	2483.50	46.6 AV	54.0	-7.4	1.74 V	123	49.0	-2.4
5	4914.00	47.3 PK	74.0	-26.7	2.68 V	132	44.8	2.5
6	4914.00	35.9 AV	54.0	-18.1	2.68 V	132	33.4	2.5
7	7371.00	50.8 PK	74.0	-23.2	1.72 V	71	43.2	7.6
8	7371.00	37.3 AV	54.0	-16.7	1.72 V	71	29.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	101.3 PK			1.44 H	44	103.7	-2.4
2	*2462.00	89.2 AV			1.44 H	44	91.6	-2.4
3	2483.50	56.9 PK	74.0	-17.1	1.44 H	44	59.3	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.44 H	44	46.8	-2.4
5	4924.00	38.5 PK	74.0	-35.5	1.08 H	30	36.0	2.5
6	4924.00	28.5 AV	54.0	-25.5	1.08 H	30	26.0	2.5
7	7386.00	45.6 PK	74.0	-28.4	1.18 H	180	37.9	7.7
8	7386.00	33.5 AV	54.0	-20.5	1.18 H	180	25.8	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	114.4 PK			1.74 V	121	116.8	-2.4
2	*2462.00	103.4 AV			1.74 V	121	105.8	-2.4
3	2483.50	67.2 PK	74.0	-6.8	1.74 V	121	69.6	-2.4
4	2483.50	48.3 AV	54.0	-5.7	1.74 V	121	50.7	-2.4
5	4924.00	46.9 PK	74.0	-27.1	2.66 V	132	44.4	2.5
6	4924.00	35.6 AV	54.0	-18.4	2.66 V	132	33.1	2.5
7	7386.00	50.3 PK	74.0	-23.7	1.70 V	72	42.6	7.7
8	7386.00	37.0 AV	54.0	-17.0	1.70 V	72	29.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.1 PK			1.43 H	44	102.5	-2.4
2	*2467.00	89.0 AV			1.43 H	44	91.4	-2.4
3	2483.50	66.3 PK	74.0	-7.7	1.43 H	44	68.7	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.43 H	44	47.2	-2.4
5	4934.00	38.9 PK	74.0	-35.1	1.02 H	41	36.5	2.4
6	4934.00	28.0 AV	54.0	-26.0	1.02 H	41	25.6	2.4
7	7401.00	45.5 PK	74.0	-28.5	1.19 H	173	37.6	7.9
8	7401.00	33.2 AV	54.0	-20.8	1.19 H	173	25.3	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.2 PK			1.71 V	125	118.6	-2.4
2	*2467.00	102.9 AV			1.71 V	125	105.3	-2.4
3	2483.50	70.3 PK	74.0	-3.7	1.71 V	125	72.7	-2.4
4	2483.50	50.6 AV	54.0	-3.4	1.71 V	125	53.0	-2.4
5	4934.00	46.7 PK	74.0	-27.3	2.68 V	134	44.3	2.4
6	4934.00	35.3 AV	54.0	-18.7	2.68 V	134	32.9	2.4
7	7401.00	49.9 PK	74.0	-24.1	1.67 V	65	42.0	7.9
8	7401.00	36.8 AV	54.0	-17.2	1.67 V	65	28.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 71% RH
Tested By	Vanness Huang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.3 PK			1.47 H	263	101.7	-2.4
2	*2472.00	87.4 AV			1.47 H	263	89.8	-2.4
3	2483.50	67.2 PK	74.0	-6.8	1.47 H	263	69.6	-2.4
4	2483.50	48.9 AV	54.0	-5.1	1.47 H	263	51.3	-2.4
5	4944.00	38.3 PK	74.0	-35.7	1.00 H	50	35.9	2.4
6	4944.00	27.6 AV	54.0	-26.4	1.00 H	50	25.2	2.4
7	7416.00	45.8 PK	74.0	-28.2	1.16 H	187	37.8	8.0
8	7416.00	33.0 AV	54.0	-21.0	1.16 H	187	25.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.1 PK			1.61 V	124	115.5	-2.4
2	*2472.00	101.3 AV			1.61 V	124	103.7	-2.4
3	2483.50	67.0 PK	74.0	-7.0	1.61 V	124	69.4	-2.4
4	2483.50	50.4 AV	54.0	-3.6	1.61 V	124	52.8	-2.4
5	4944.00	46.4 PK	74.0	-27.6	2.70 V	126	44.0	2.4
6	4944.00	35.0 AV	54.0	-19.0	2.70 V	126	32.6	2.4
7	7416.00	49.9 PK	74.0	-24.1	1.68 V	77	41.9	8.0
8	7416.00	36.7 AV	54.0	-17.3	1.68 V	77	28.7	8.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

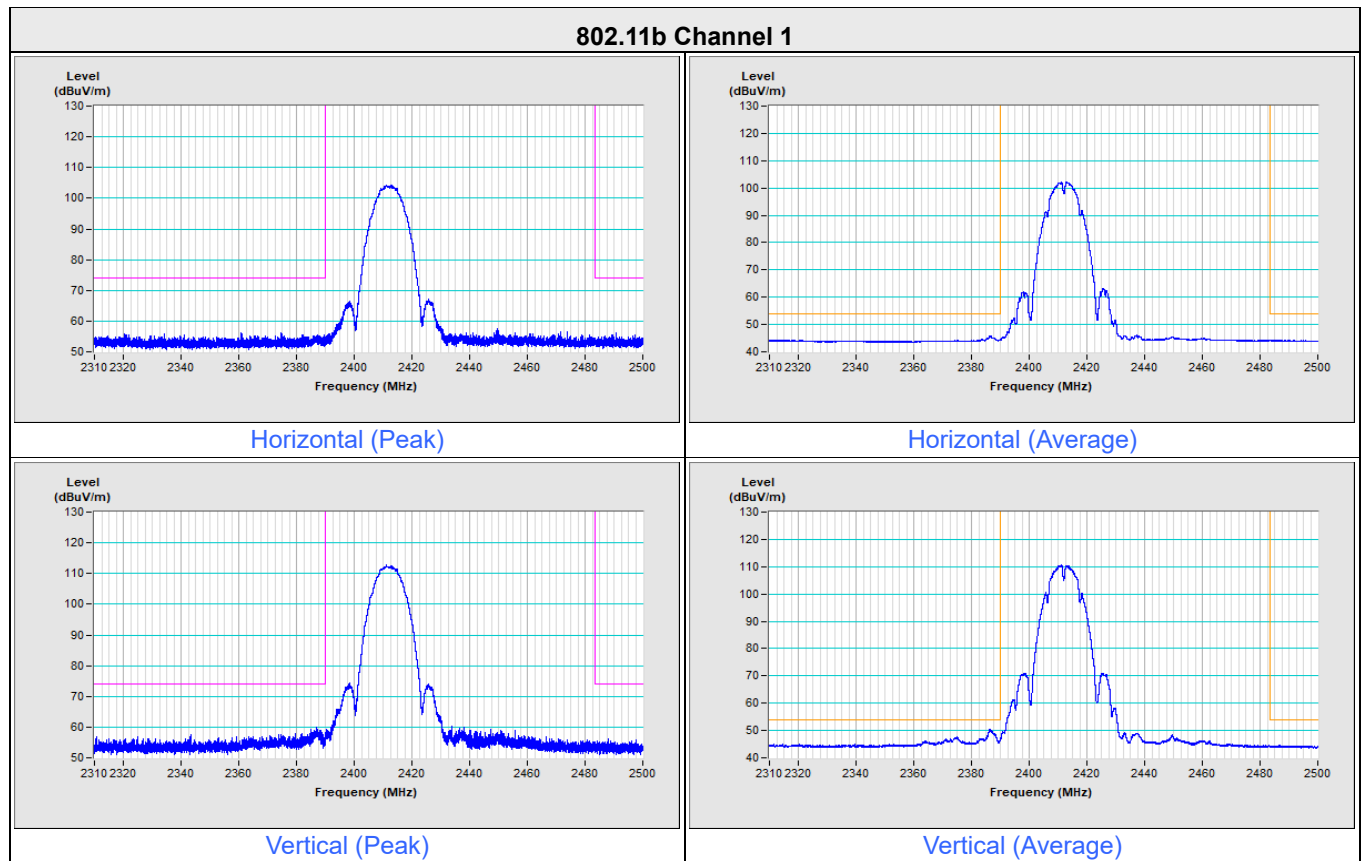


802.11b Channel 2

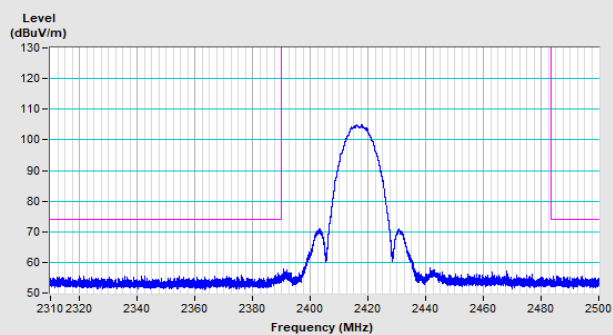


Horizontal (Peak)

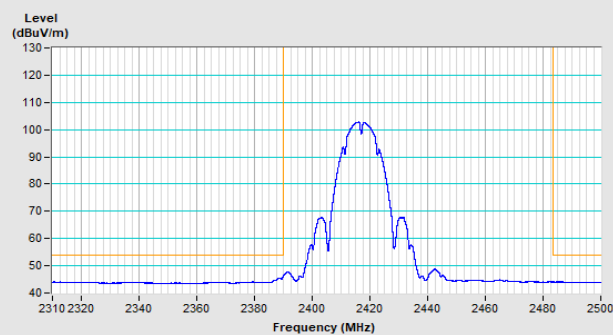

Horizontal (Average)

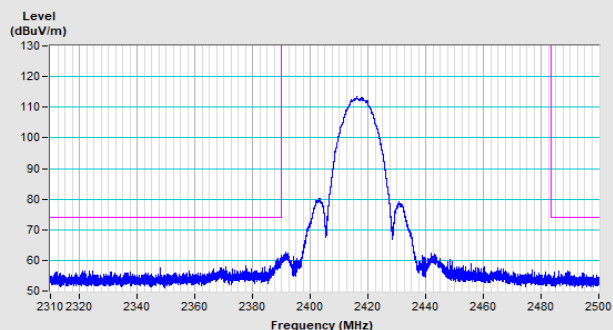


Vertical (Peak)

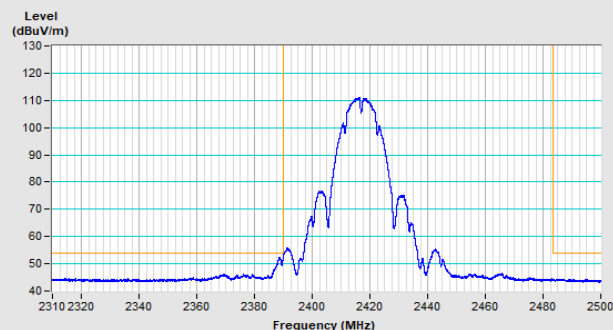


Vertical (Average)


802.11b Channel 10

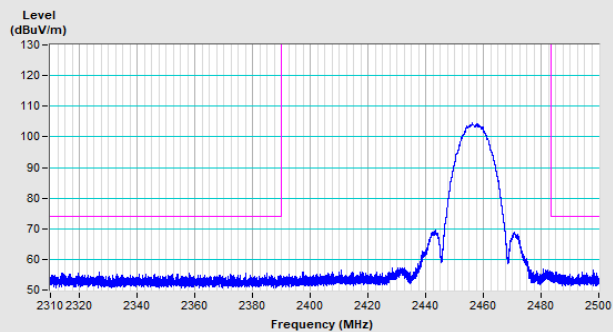


Horizontal (Peak)

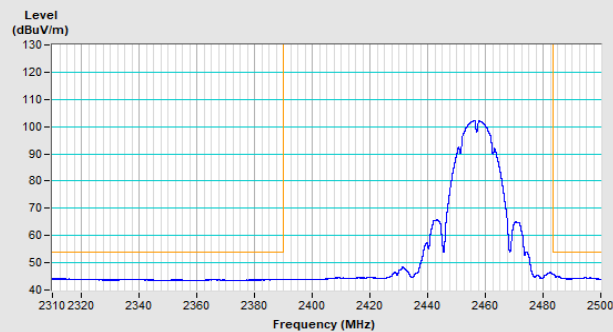

Horizontal (Average)

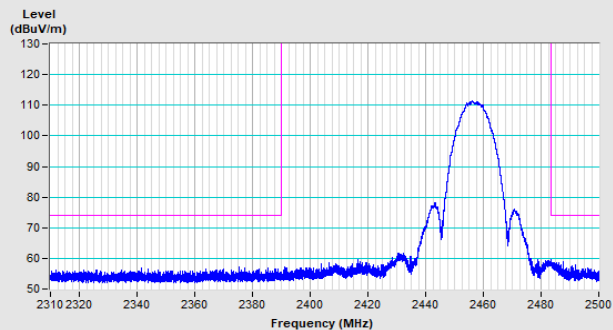


Vertical (Peak)

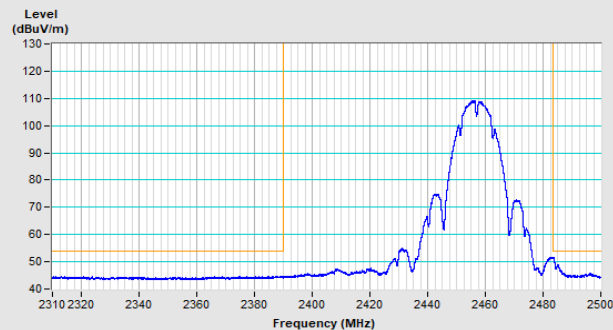


Vertical (Average)


802.11b Channel 11

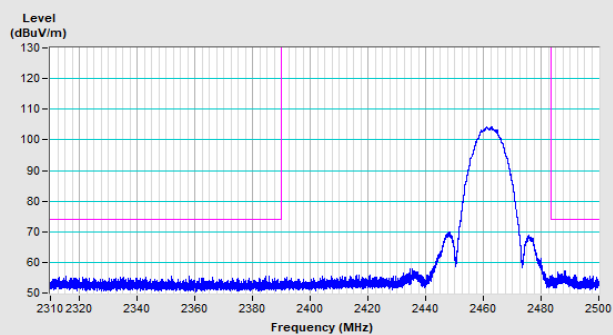


Horizontal (Peak)

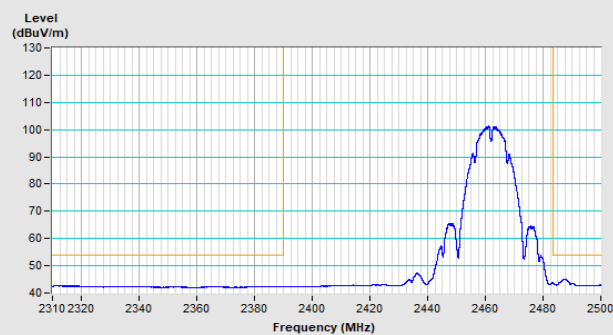

Horizontal (Average)

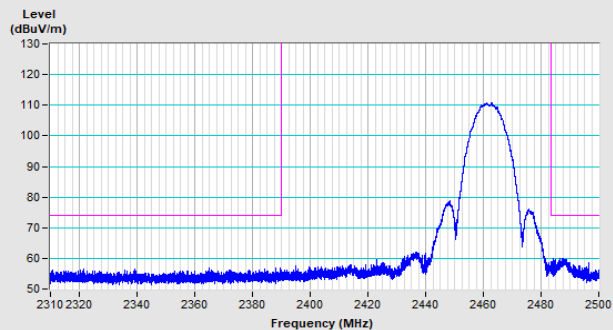


Vertical (Peak)

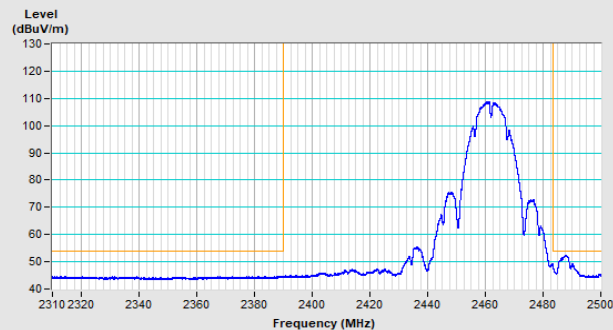


Vertical (Average)


802.11b Channel 12

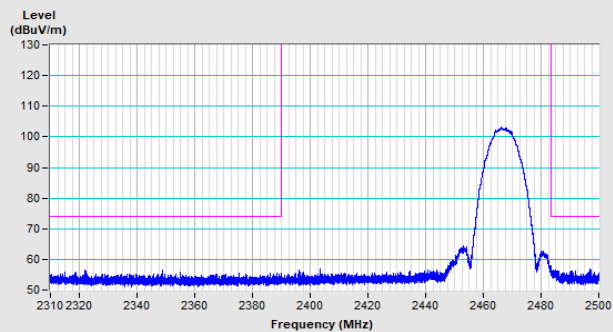


Horizontal (Peak)

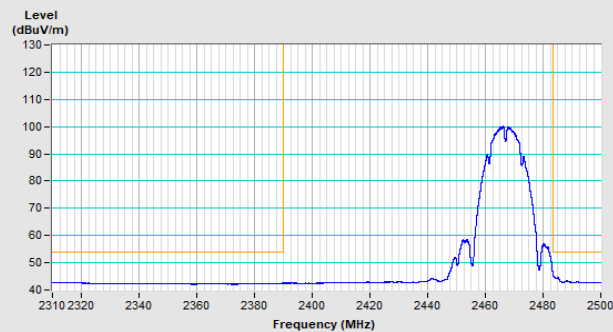

Horizontal (Average)

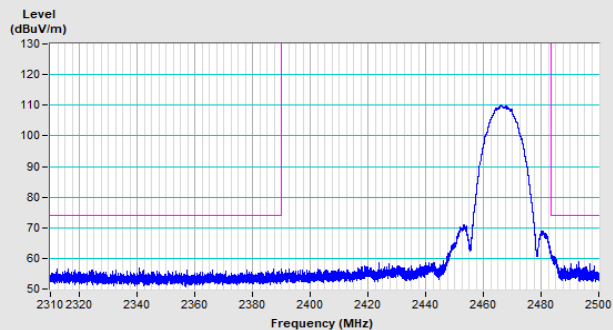


Vertical (Peak)

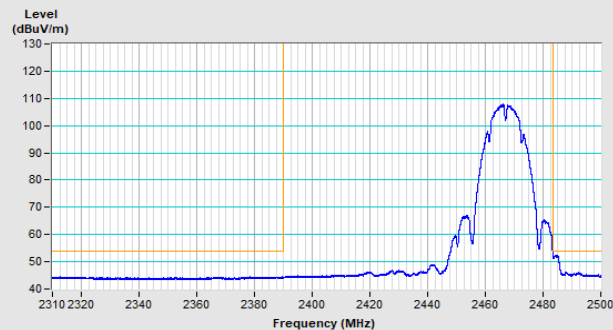


Vertical (Average)


802.11b Channel 13

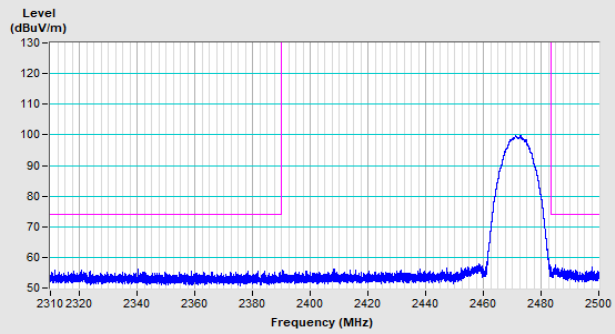


Horizontal (Peak)

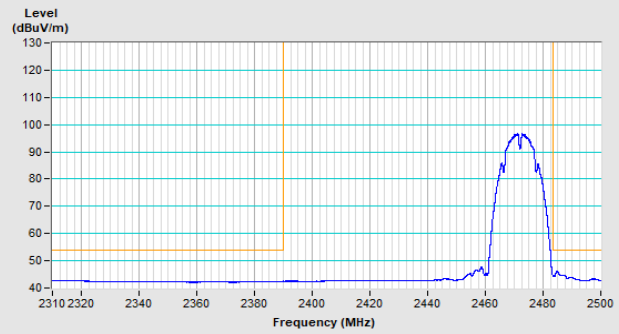

Horizontal (Average)

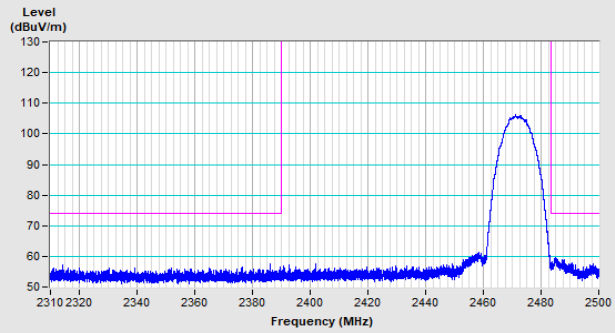


Vertical (Peak)

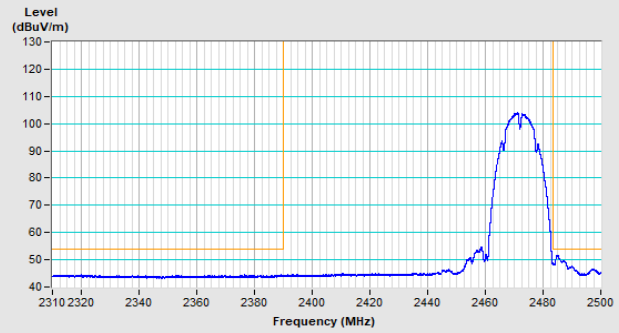


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

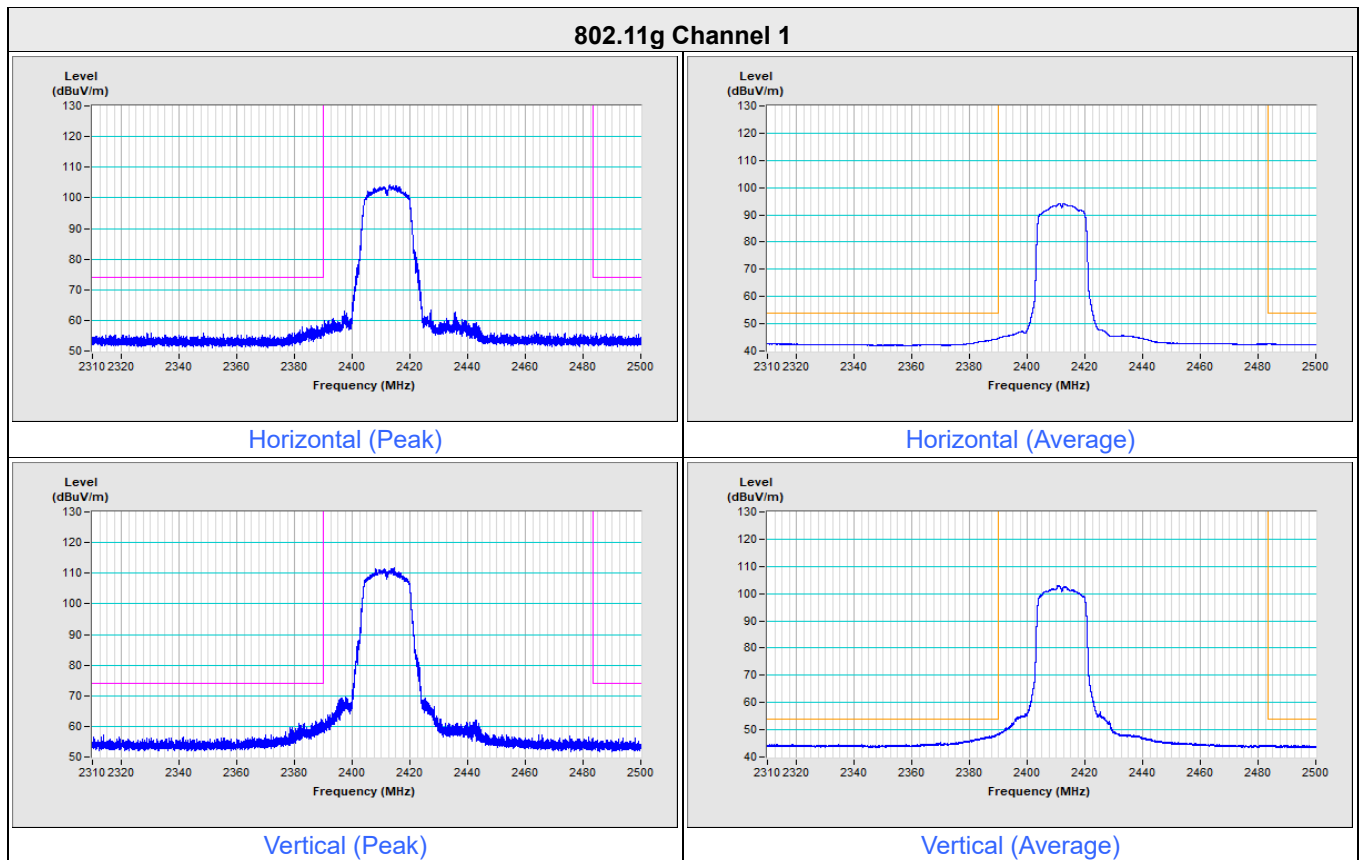


802.11g Channel 2

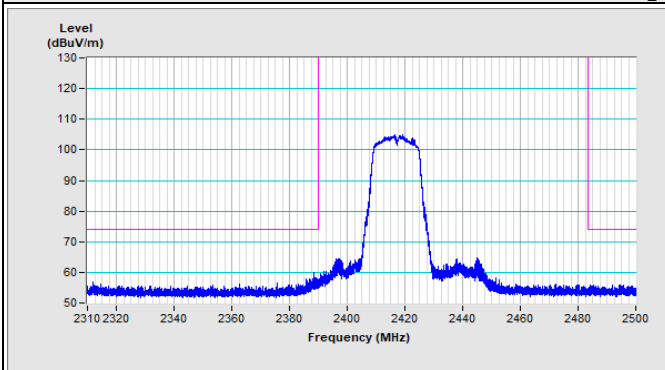


Horizontal (Peak)

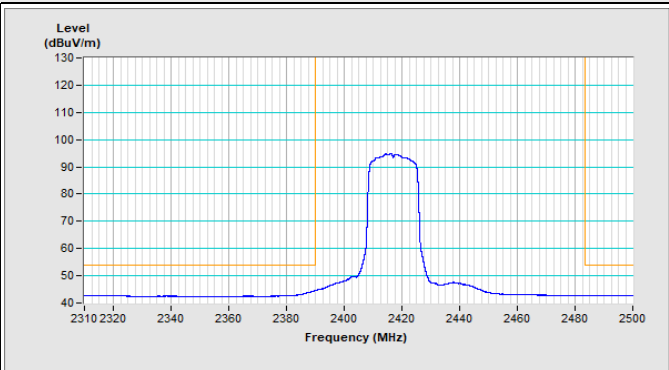

Horizontal (Average)

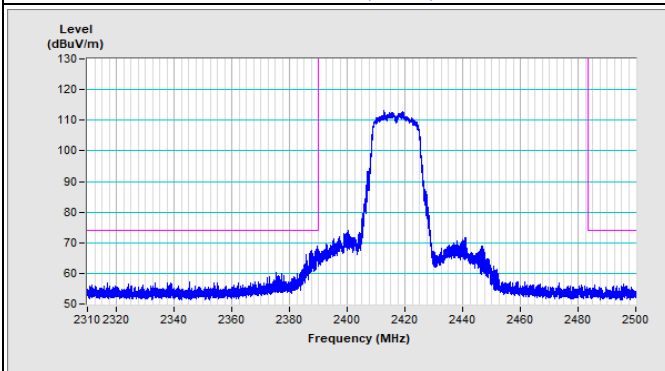


Vertical (Peak)

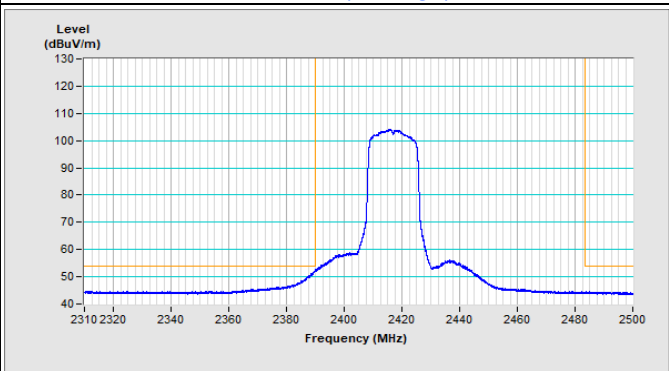


Vertical (Average)


802.11g Channel 10

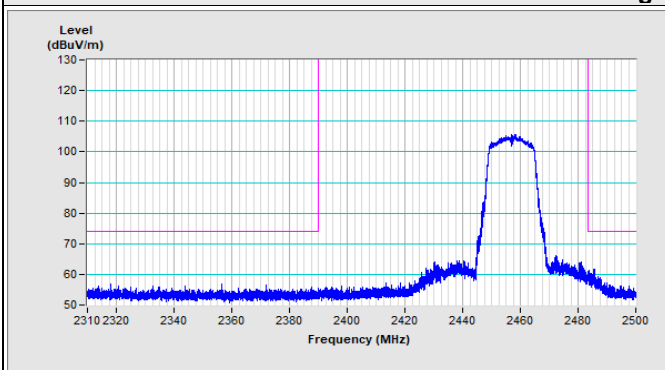


Horizontal (Peak)

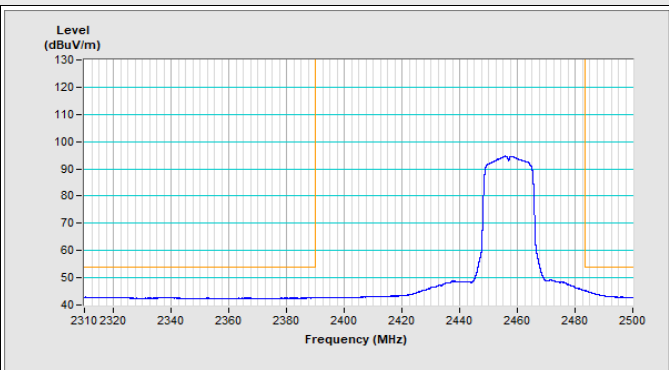

Horizontal (Average)

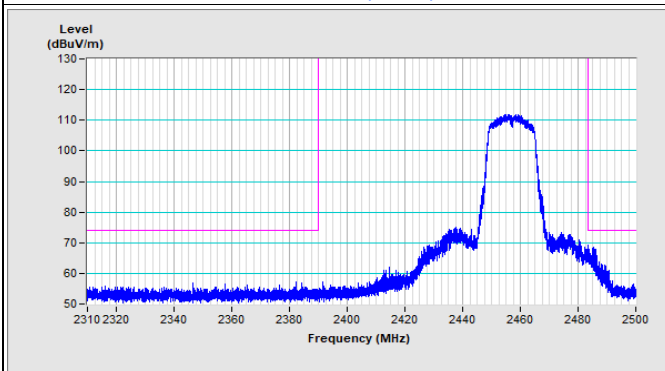


Vertical (Peak)

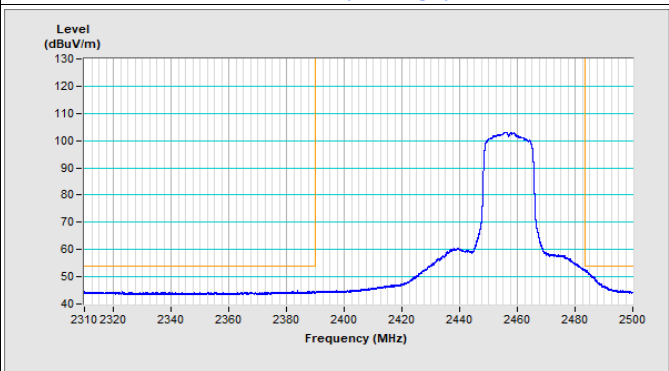


Vertical (Average)


802.11g Channel 11

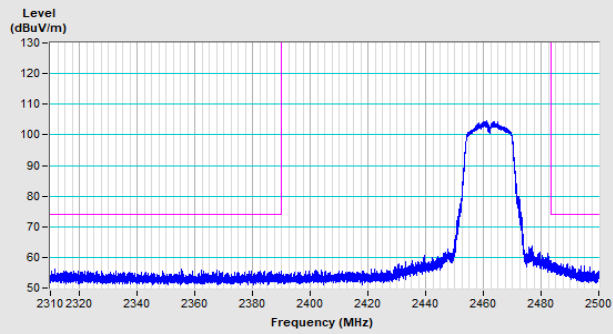


Horizontal (Peak)

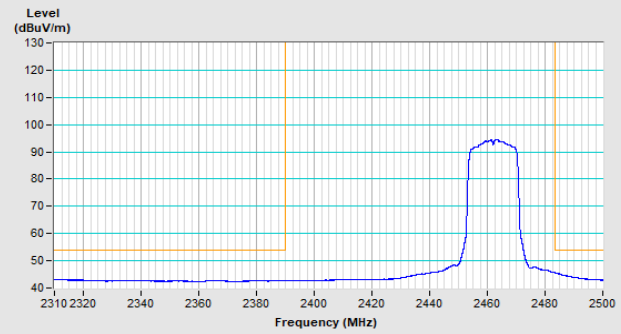

Horizontal (Average)

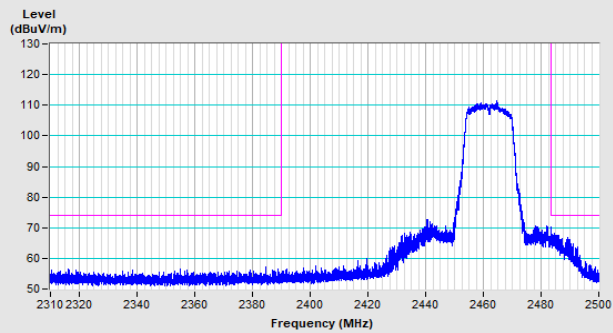


Vertical (Peak)

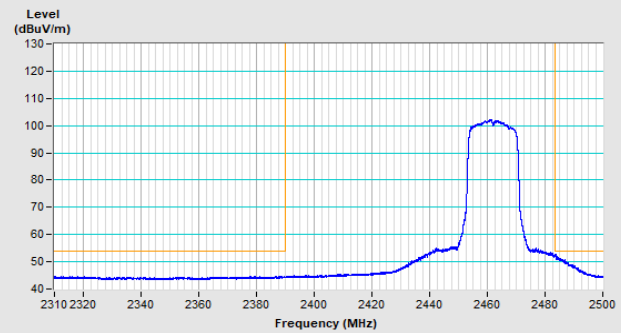


Vertical (Average)


802.11g Channel 12

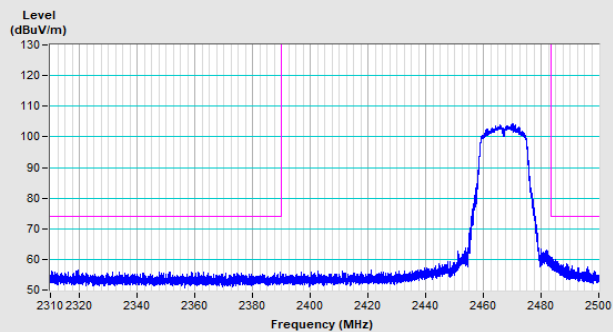


Horizontal (Peak)

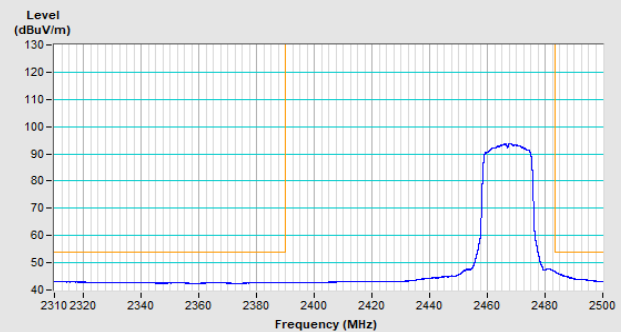

Horizontal (Average)

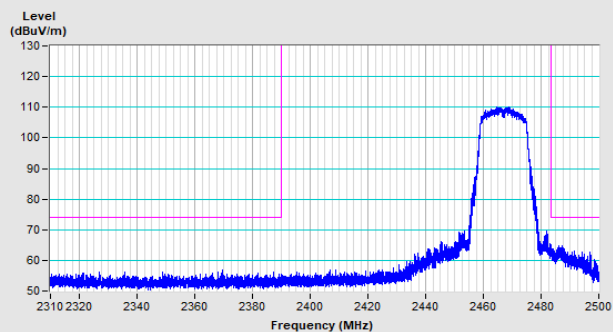


Vertical (Peak)

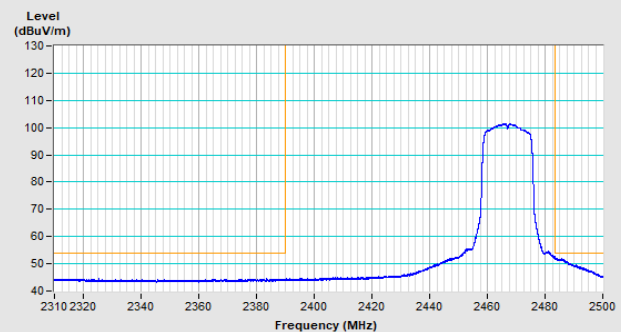


Vertical (Average)


802.11g Channel 13

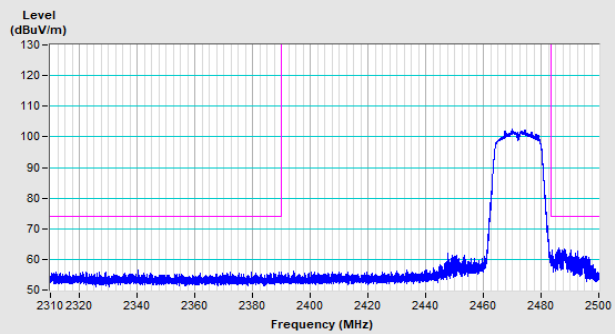


Horizontal (Peak)

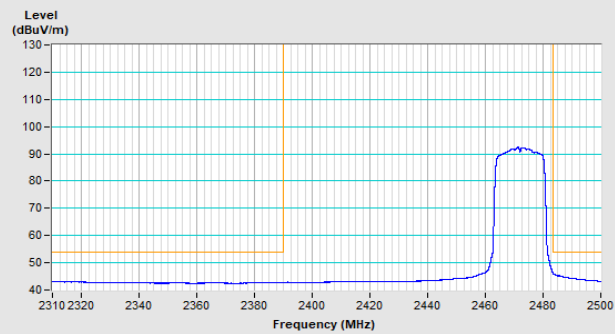

Horizontal (Average)

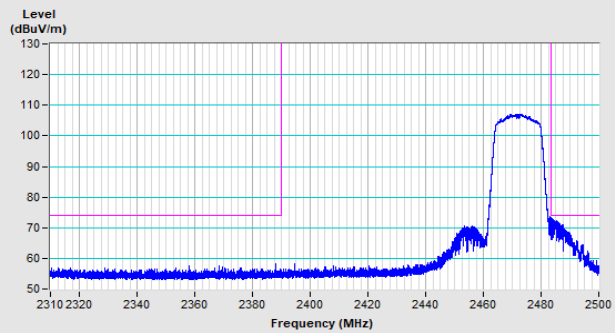


Vertical (Peak)

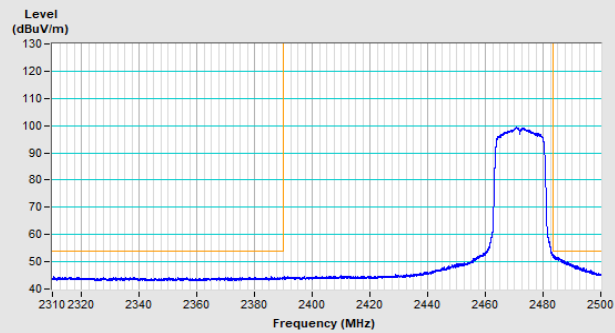


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

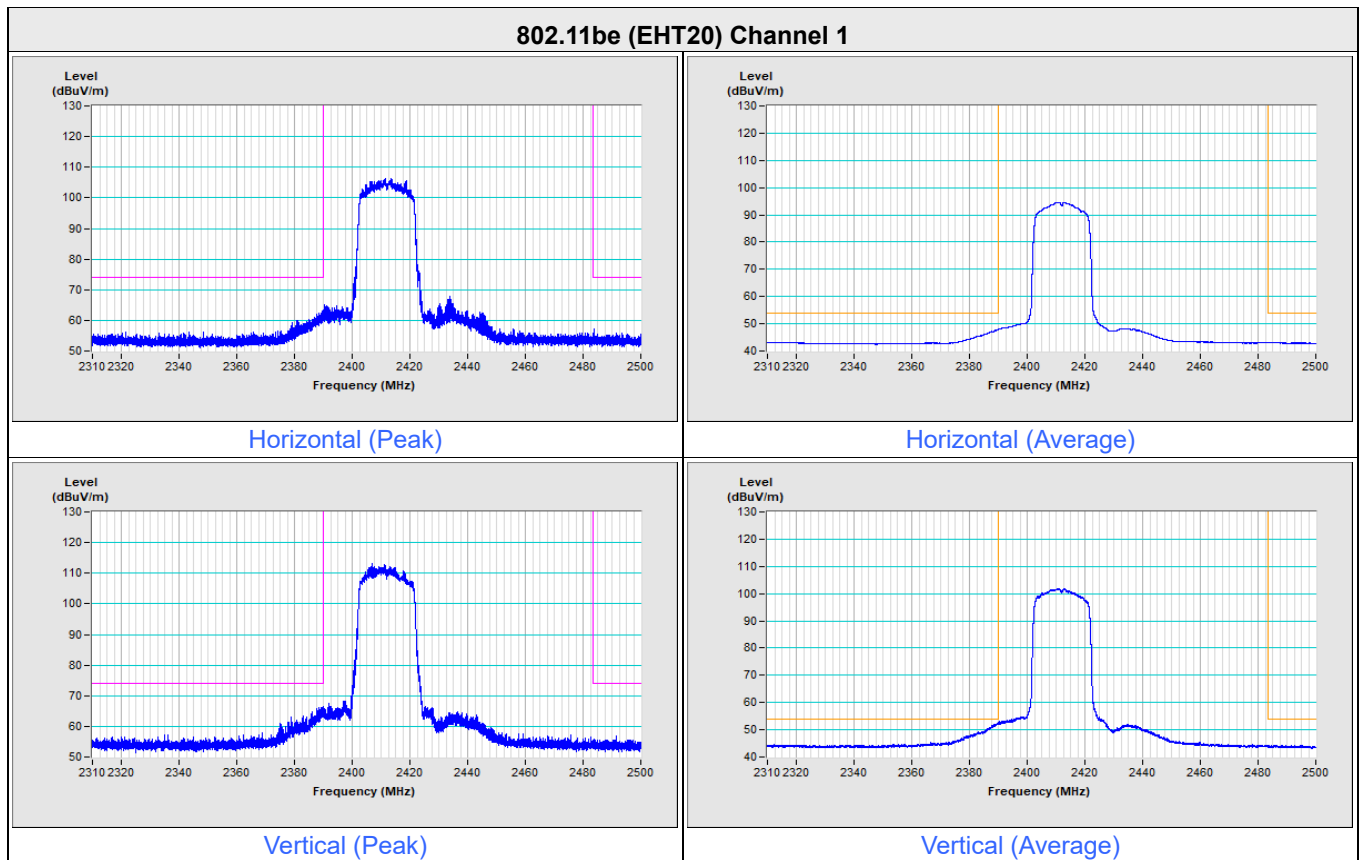


802.11be (EHT20) Channel 2

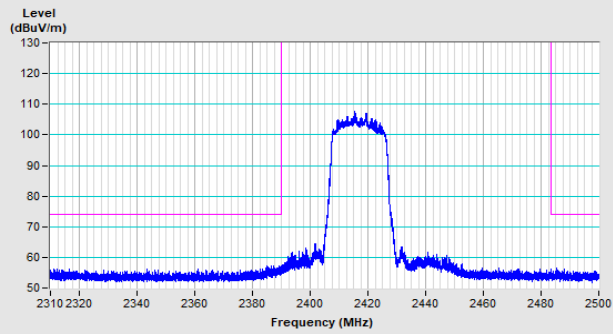


Horizontal (Peak)

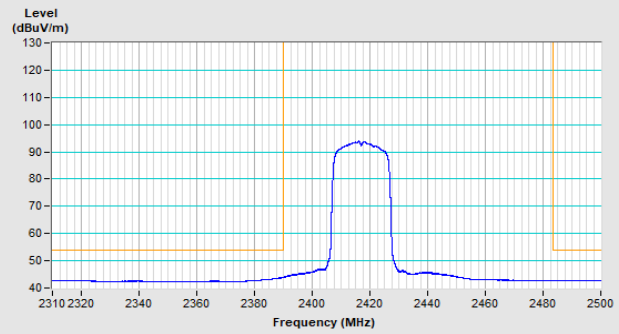

Horizontal (Average)

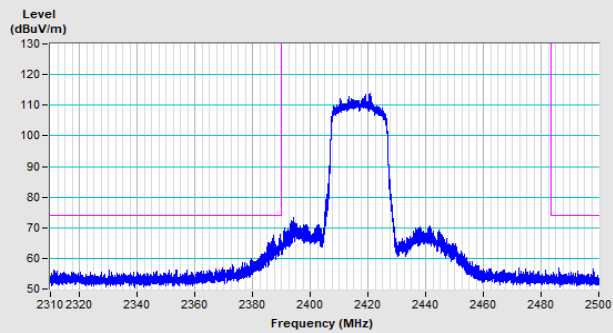


Vertical (Peak)

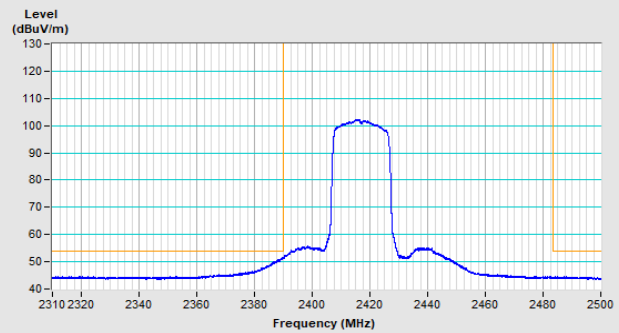


Vertical (Average)


802.11be (EHT20) Channel 10

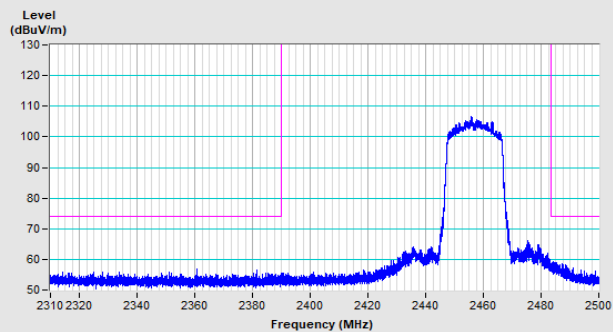


Horizontal (Peak)

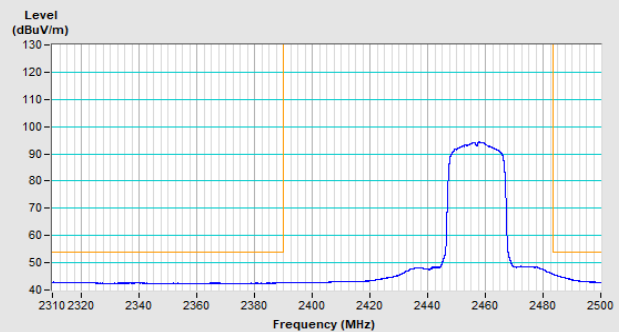

Horizontal (Average)

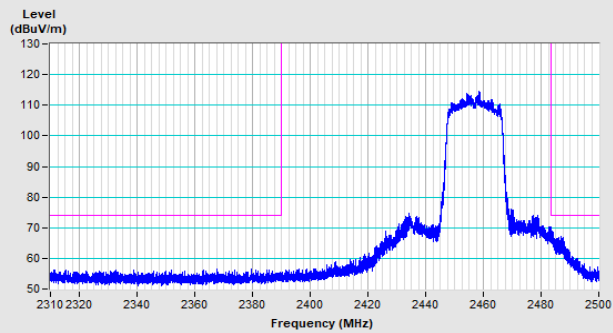


Vertical (Peak)

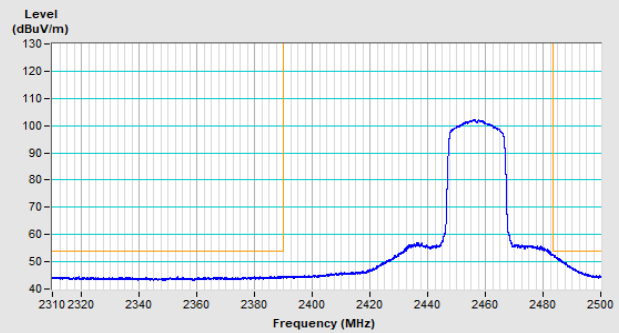


Vertical (Average)


802.11be (EHT20) Channel 11

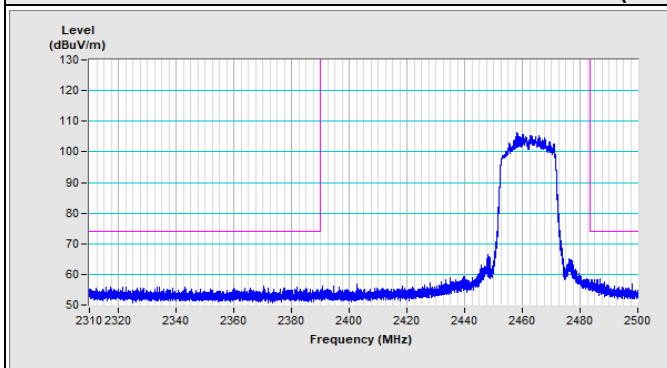


Horizontal (Peak)

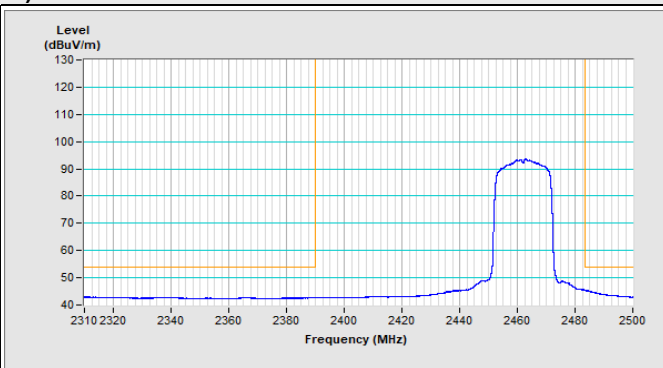

Horizontal (Average)

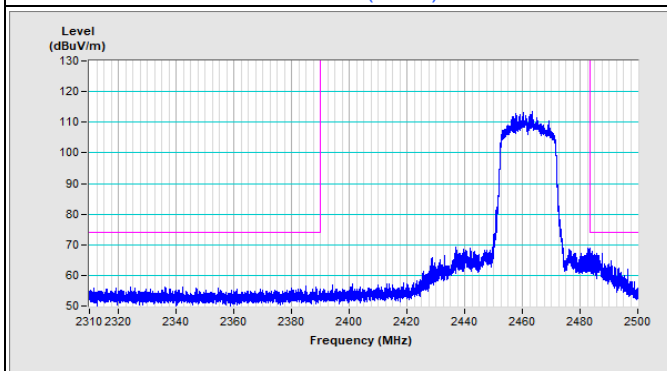


Vertical (Peak)

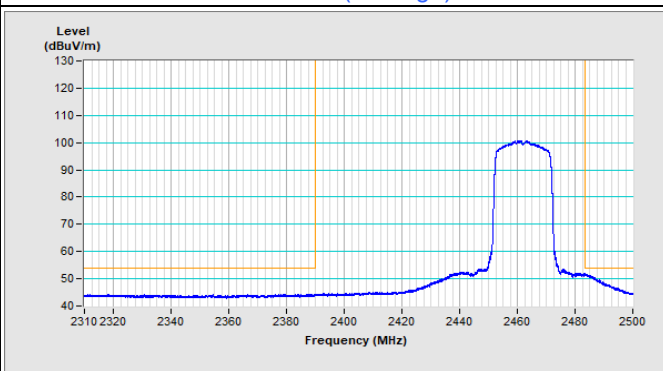


Vertical (Average)


802.11be (EHT20) Channel 12

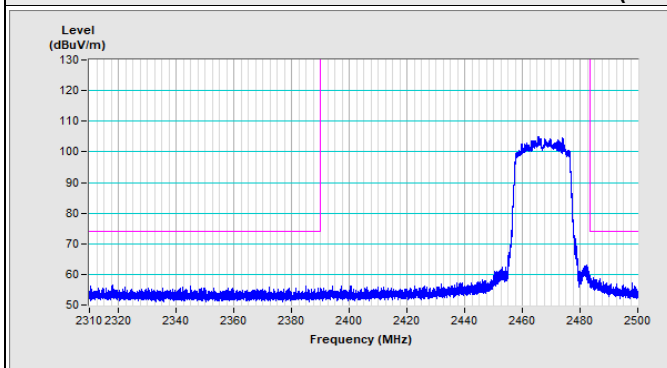


Horizontal (Peak)

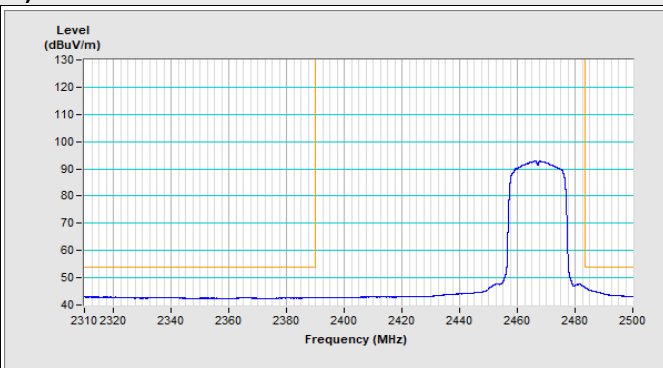

Horizontal (Average)

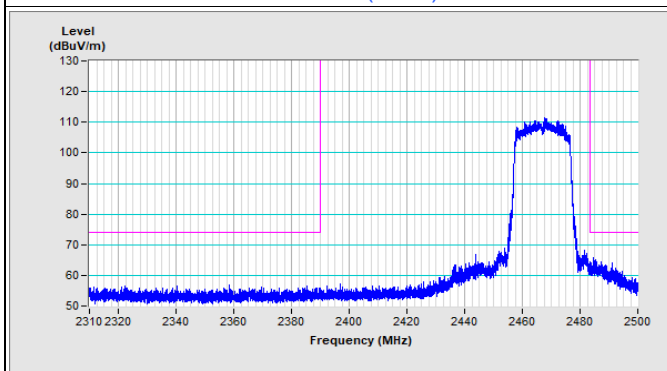


Vertical (Peak)

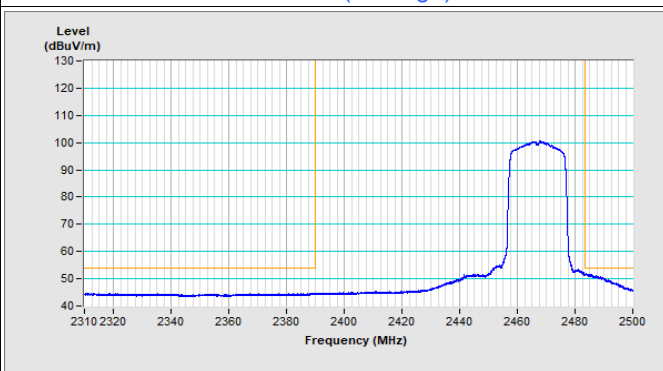


Vertical (Average)


802.11be (EHT20) Channel 13

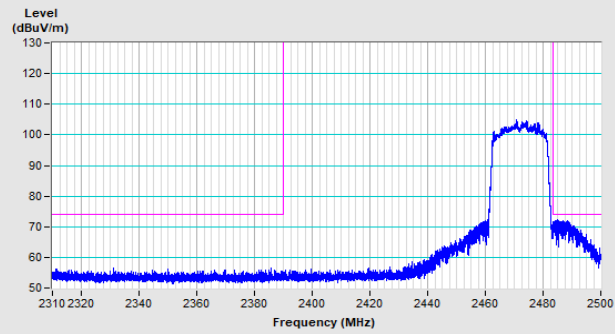


Horizontal (Peak)

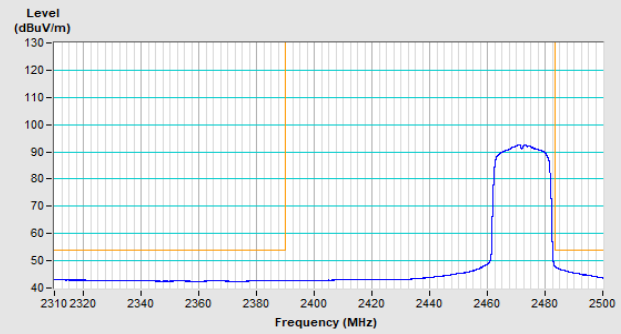

Horizontal (Average)

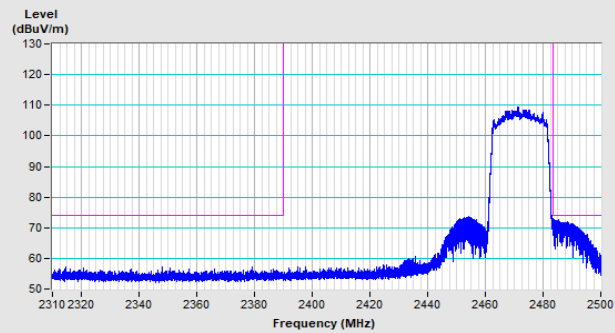


Vertical (Peak)

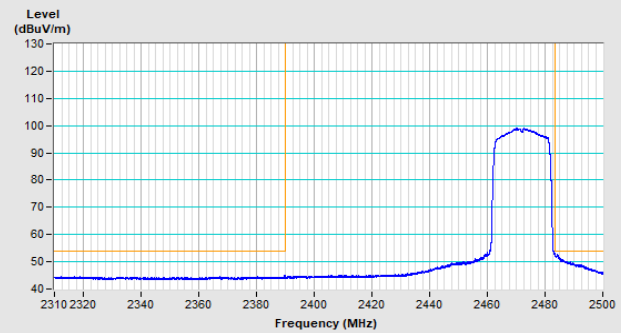


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

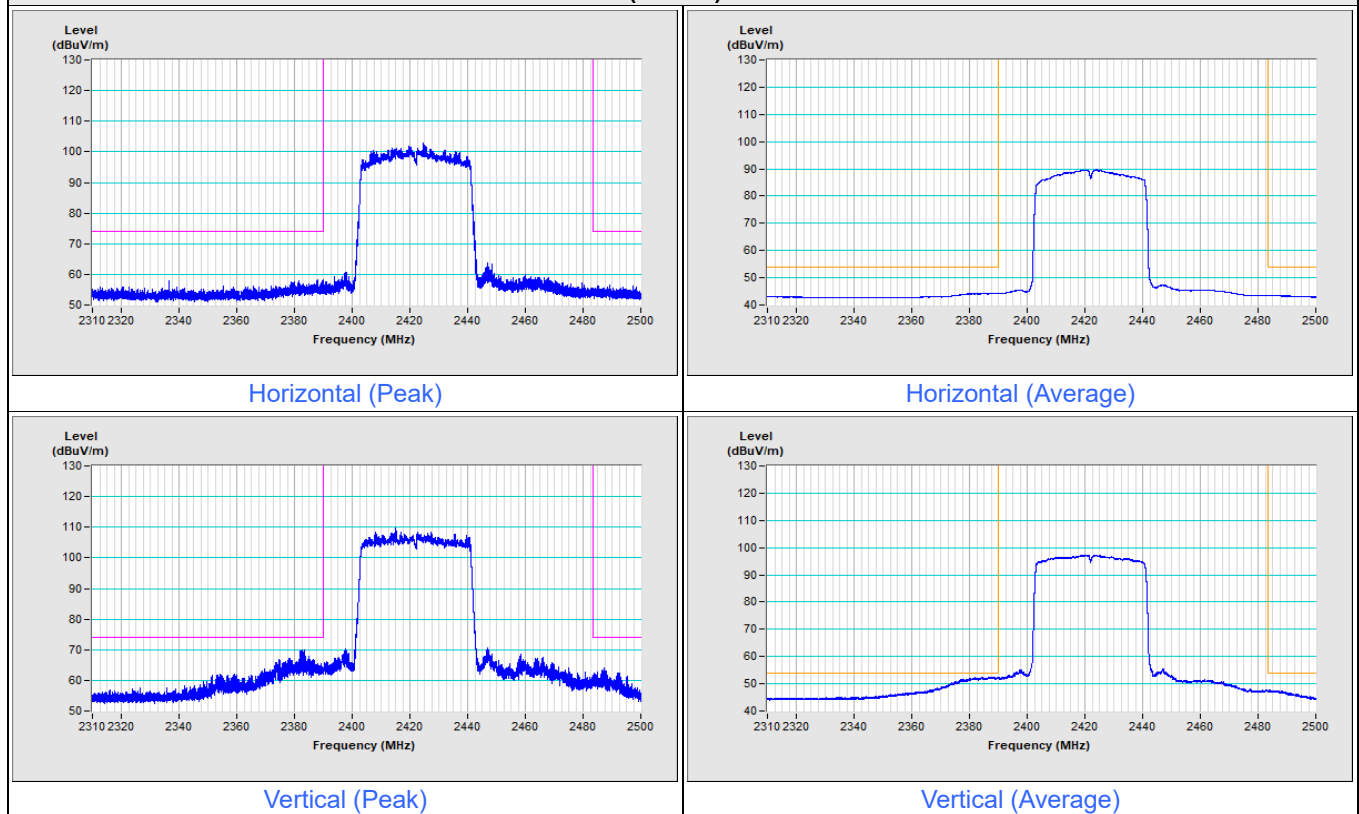


802.11be (EHT40) Channel 9

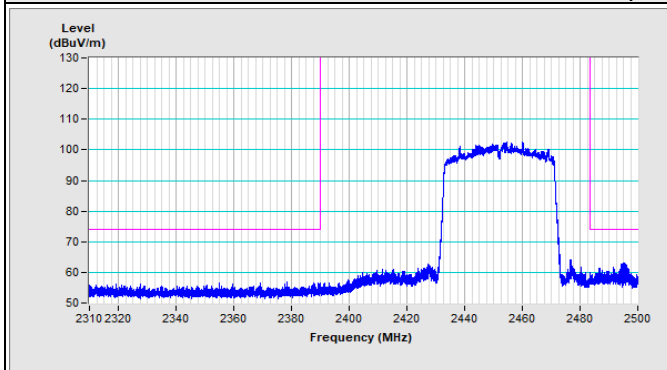


Horizontal (Peak)

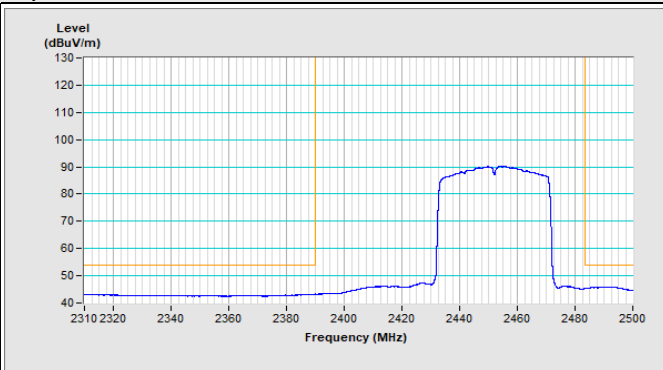

Horizontal (Average)

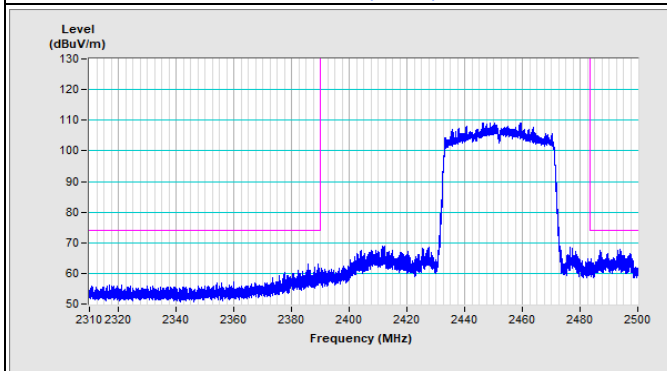


Vertical (Peak)

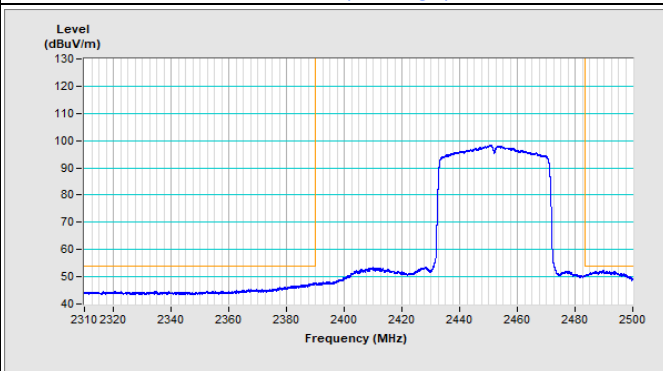


Vertical (Average)


802.11be (EHT40) Channel 10

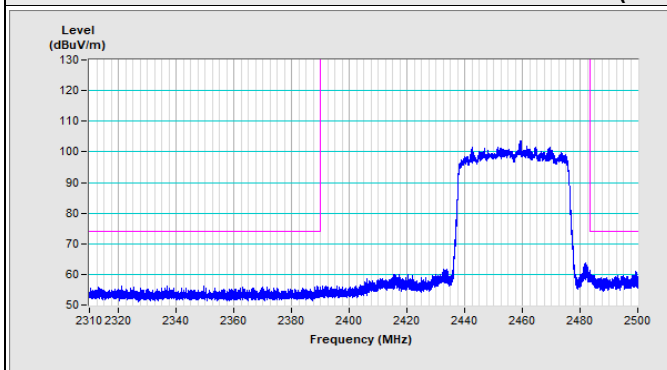


Horizontal (Peak)

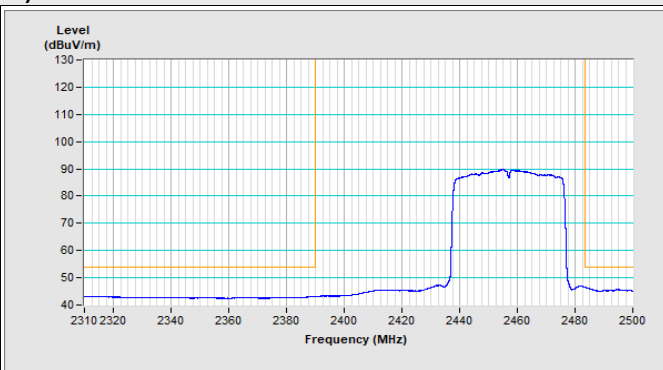

Horizontal (Average)

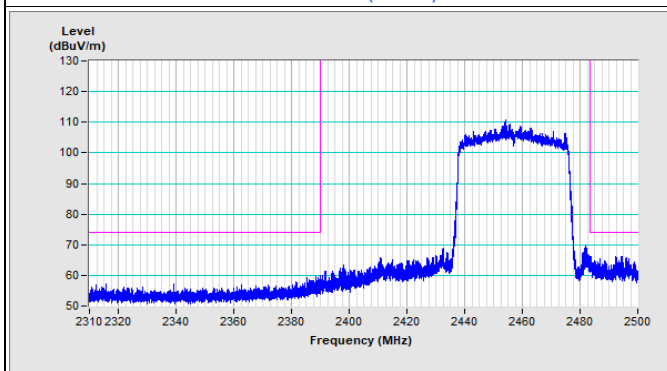


Vertical (Peak)

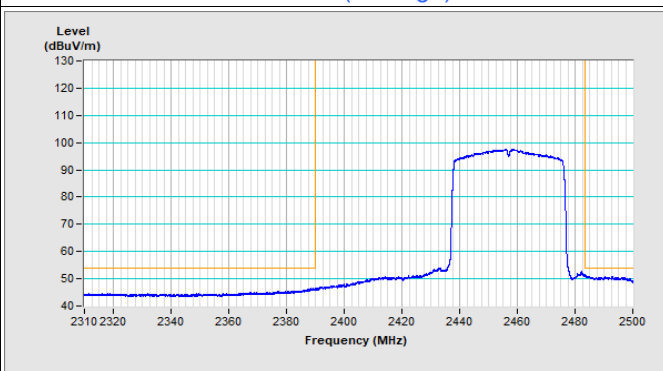


Vertical (Average)


802.11be (EHT40) Channel 11

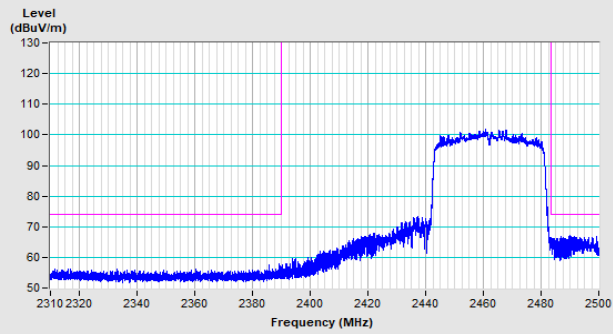


Horizontal (Peak)

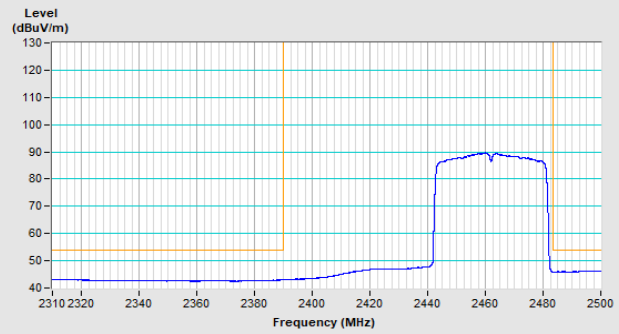

Horizontal (Average)

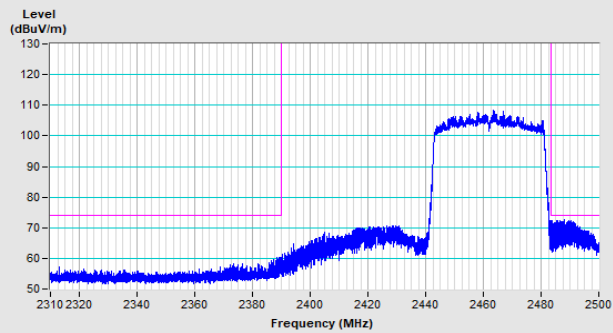


Vertical (Peak)

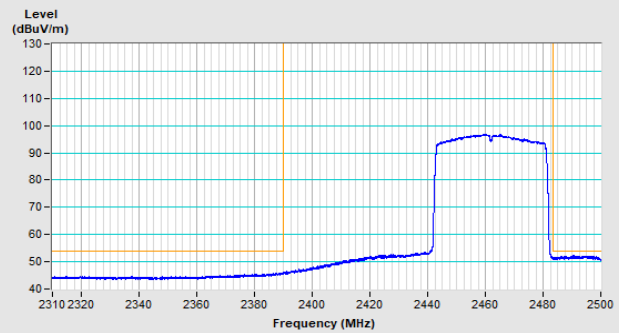


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

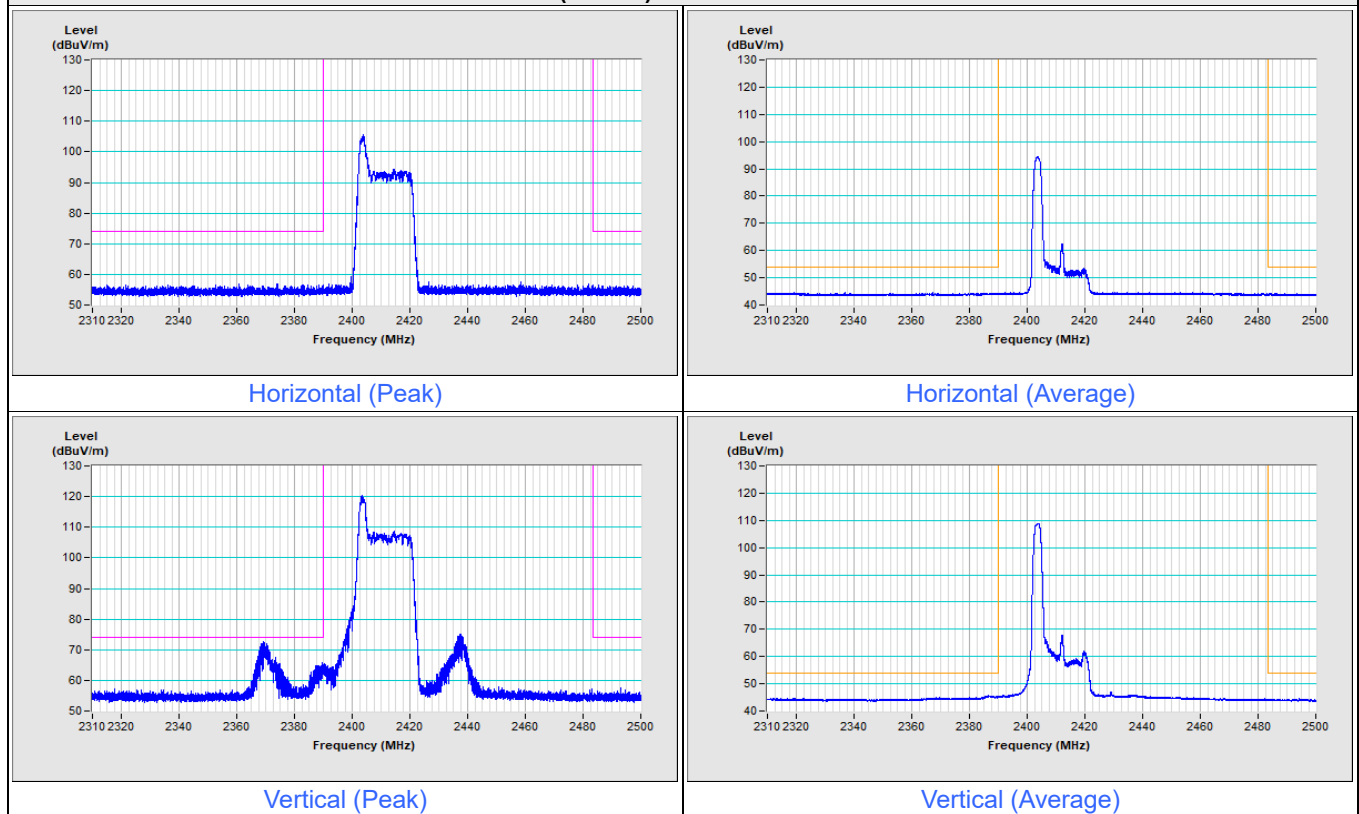


802.11be (EHT20) 26-tone RU Channel 2

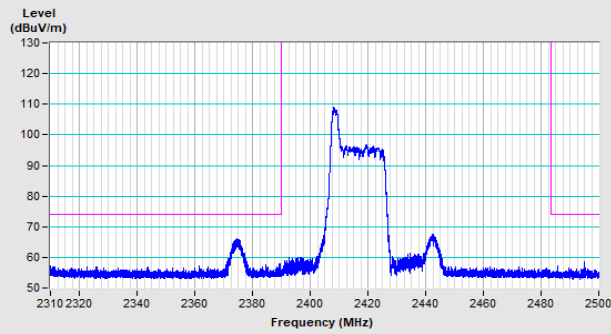


Horizontal (Peak)

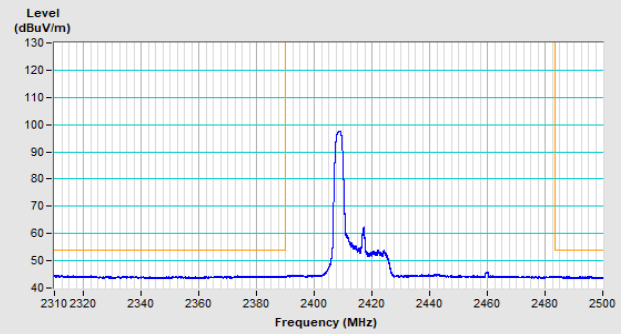

Horizontal (Average)

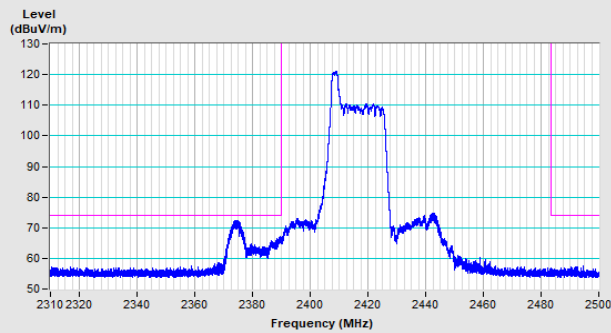


Vertical (Peak)

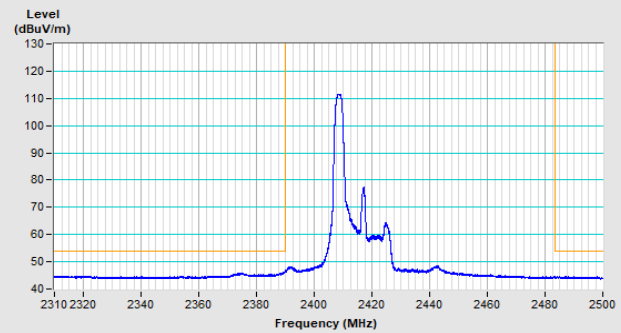


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 10

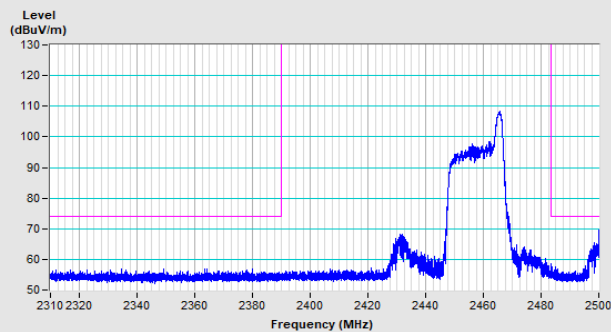


Horizontal (Peak)

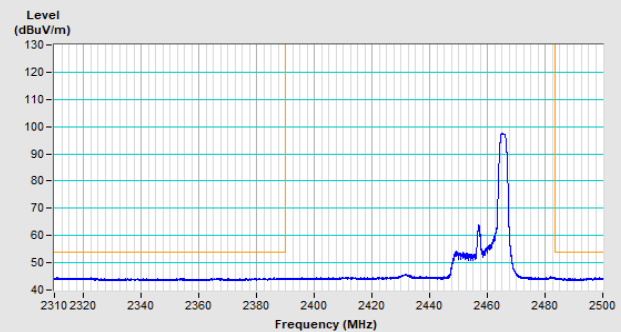

Horizontal (Average)

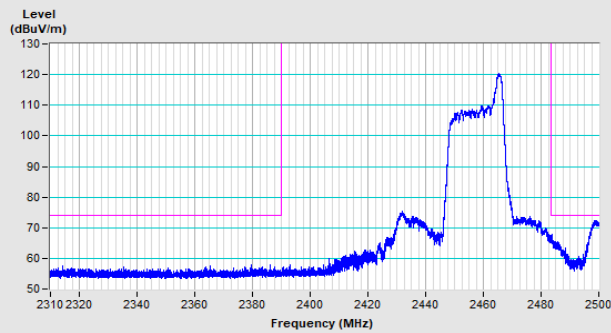


Vertical (Peak)

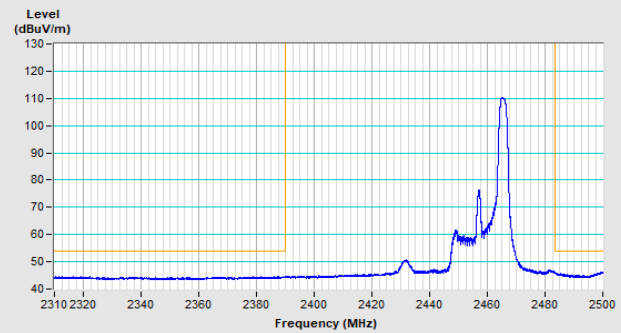


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 11

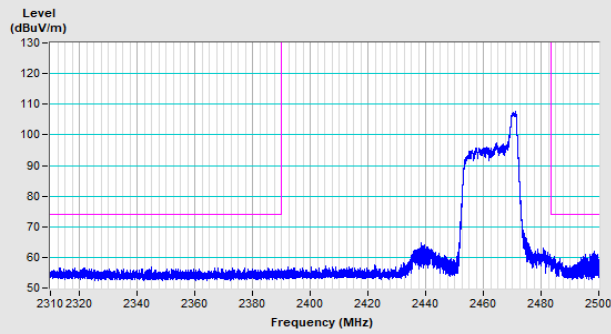


Horizontal (Peak)

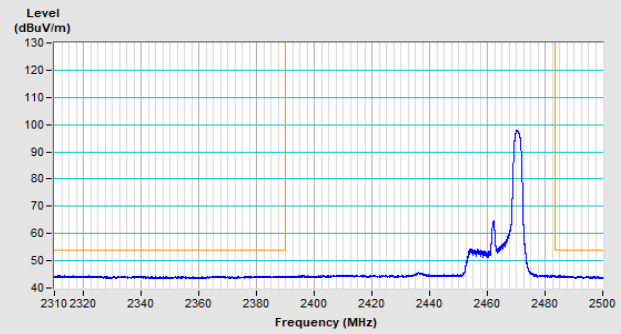

Horizontal (Average)

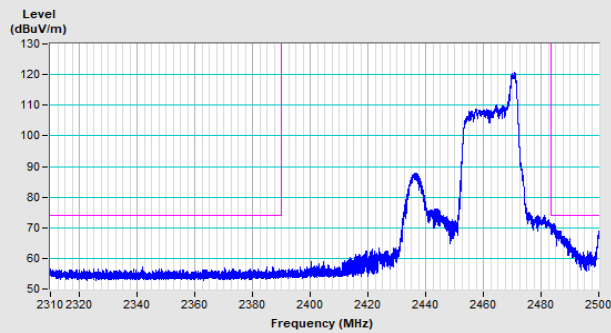


Vertical (Peak)

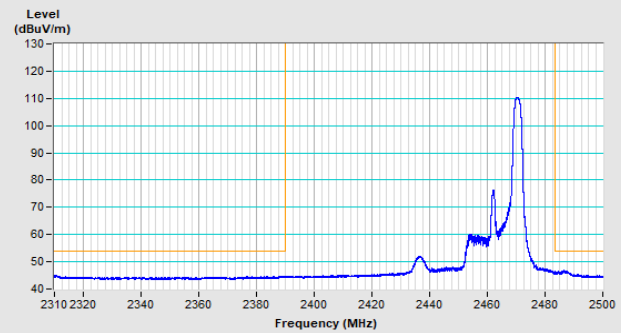


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

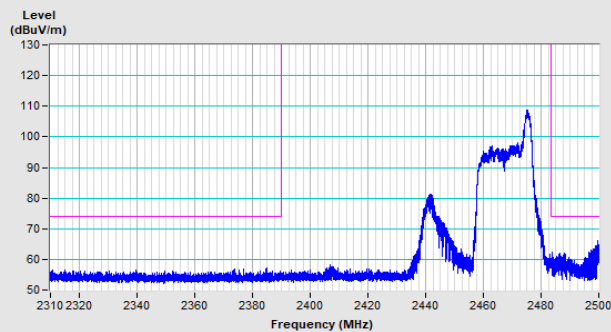


Horizontal (Peak)

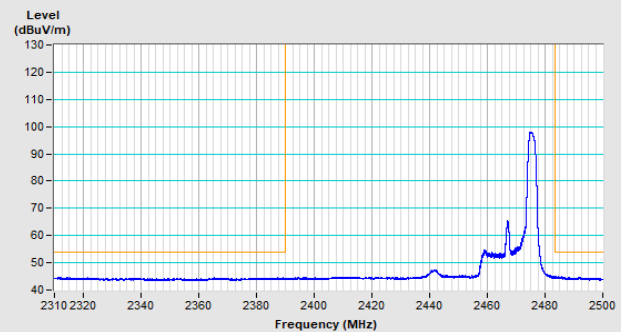

Horizontal (Average)

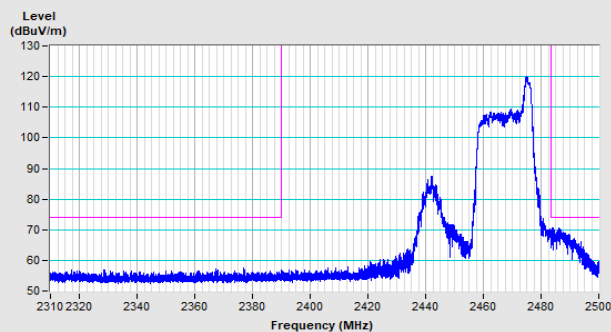


Vertical (Peak)

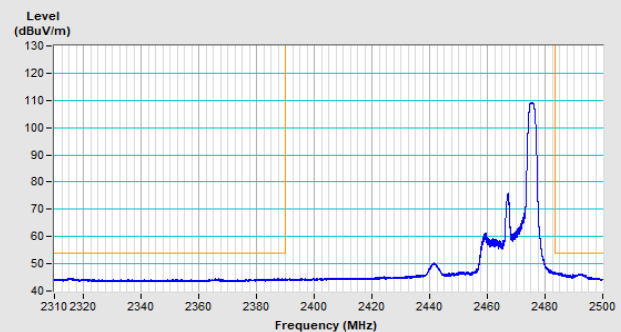


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

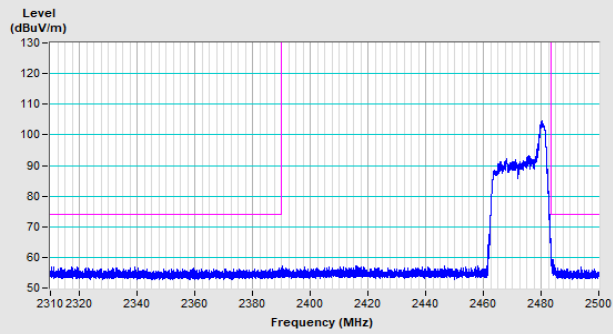


Horizontal (Peak)

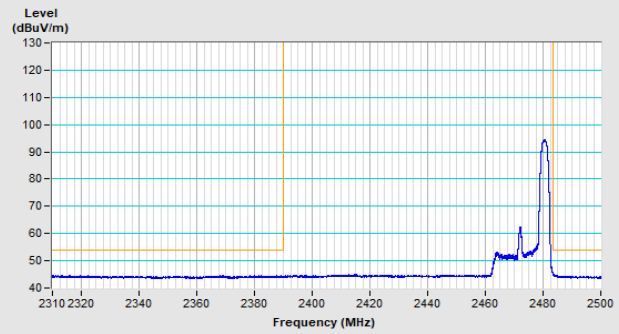

Horizontal (Average)

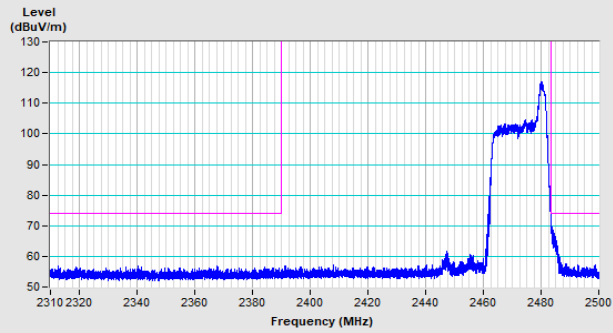


Vertical (Peak)

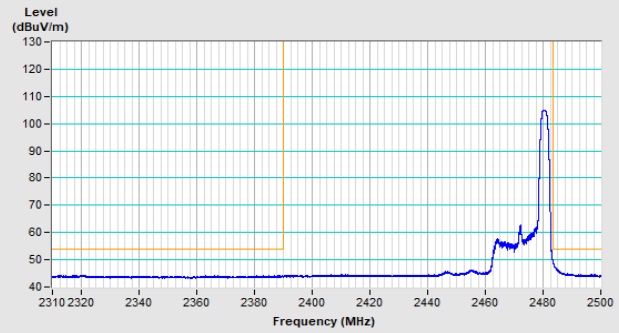


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

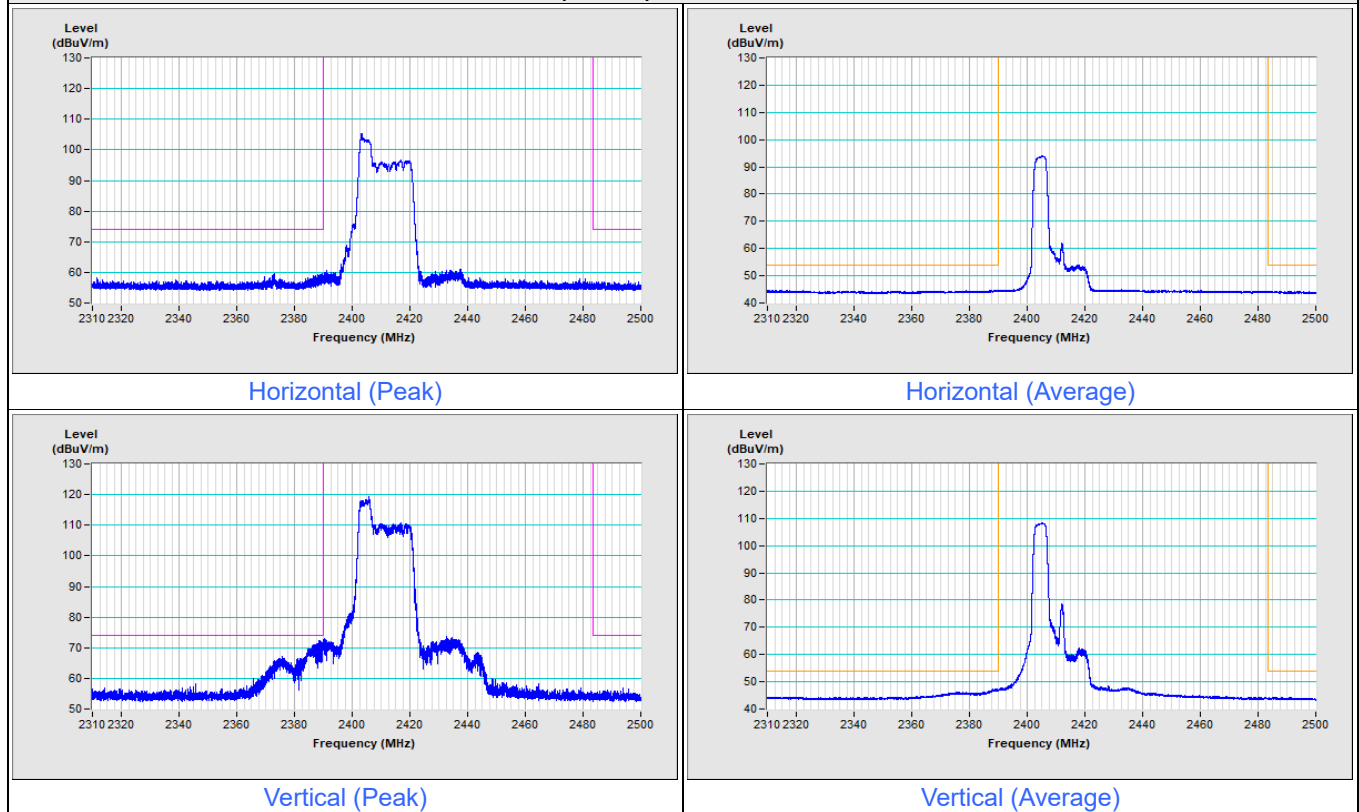


802.11be (EHT20) 52-tone RU Channel 2

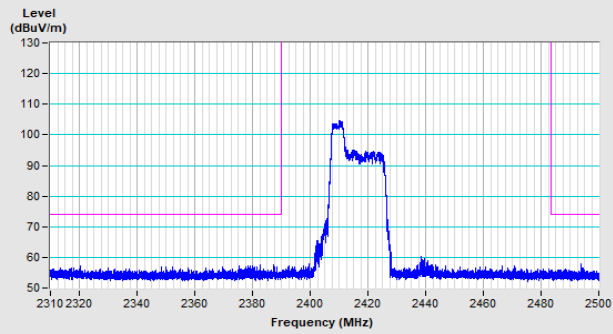


Horizontal (Peak)

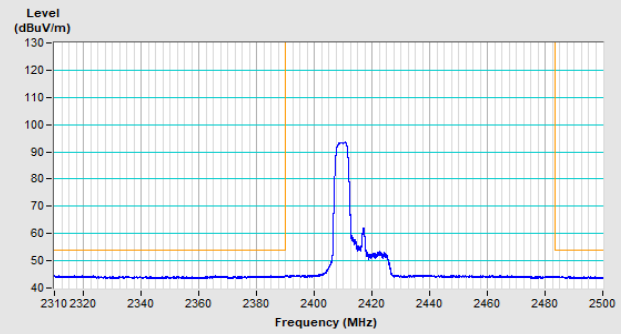

Horizontal (Average)

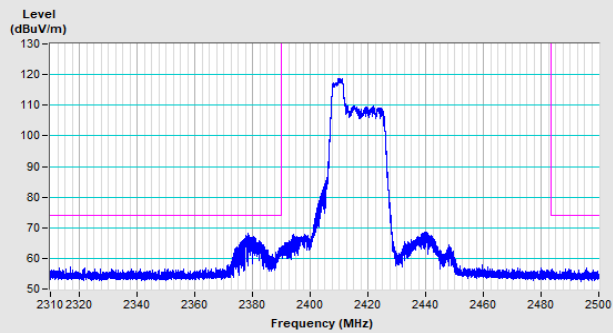


Vertical (Peak)

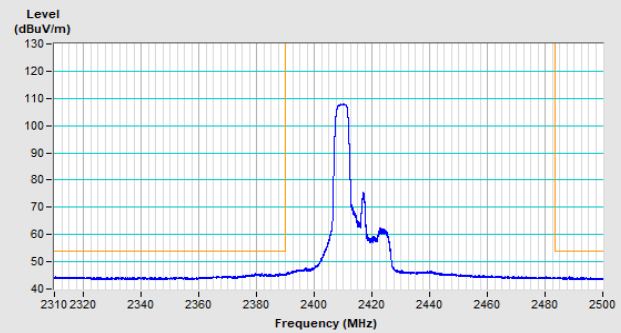


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 10

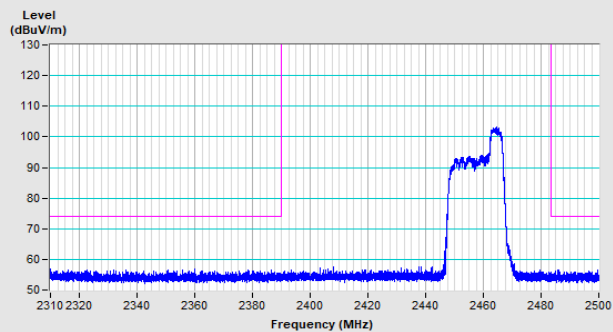


Horizontal (Peak)

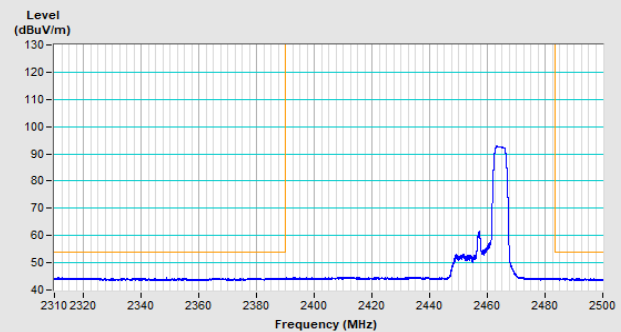

Horizontal (Average)

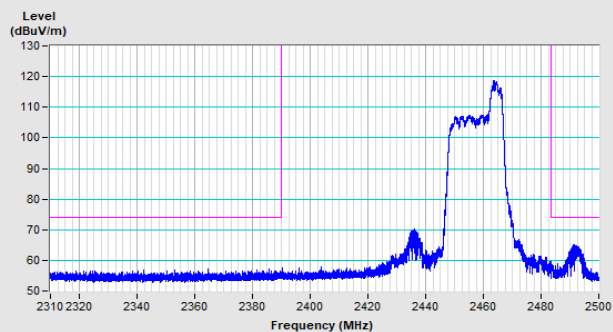


Vertical (Peak)

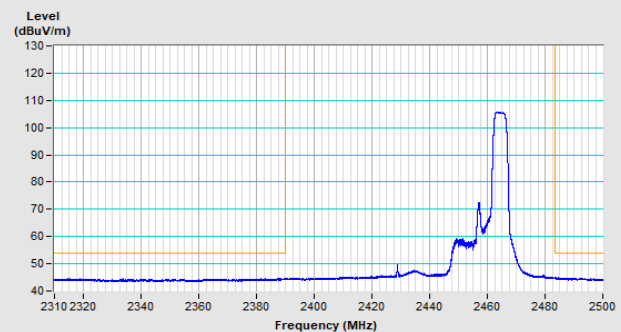


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 11

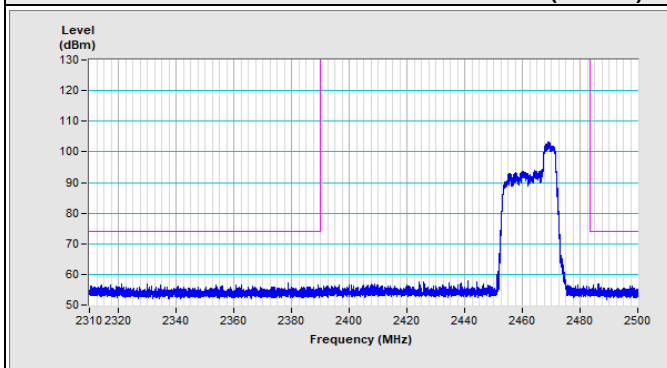


Horizontal (Peak)

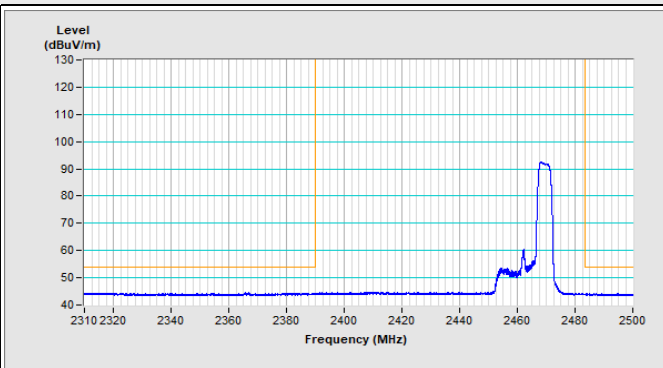

Horizontal (Average)

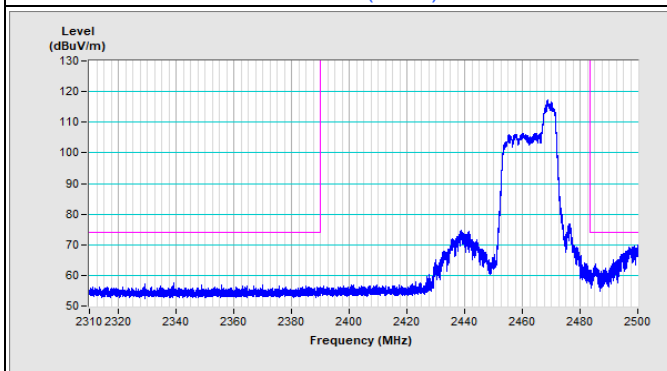


Vertical (Peak)

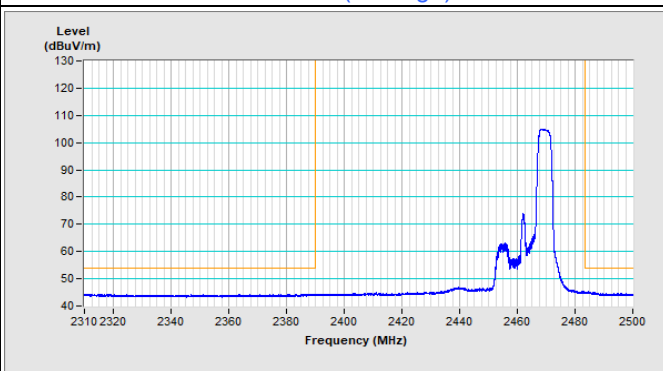


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

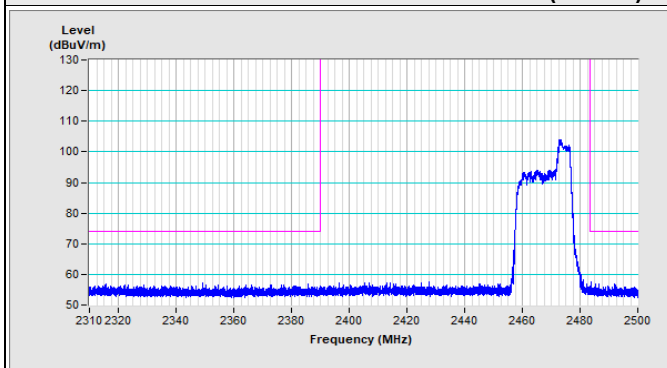


Horizontal (Peak)

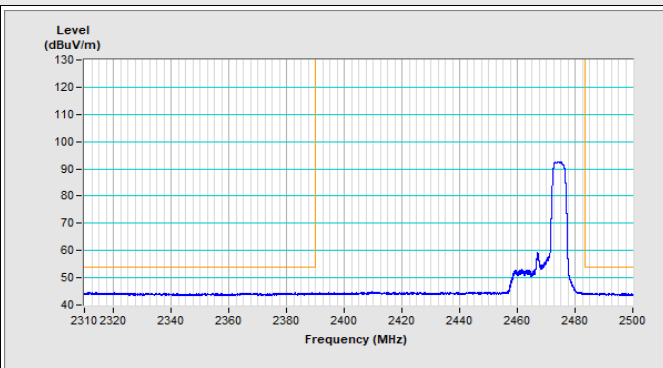

Horizontal (Average)

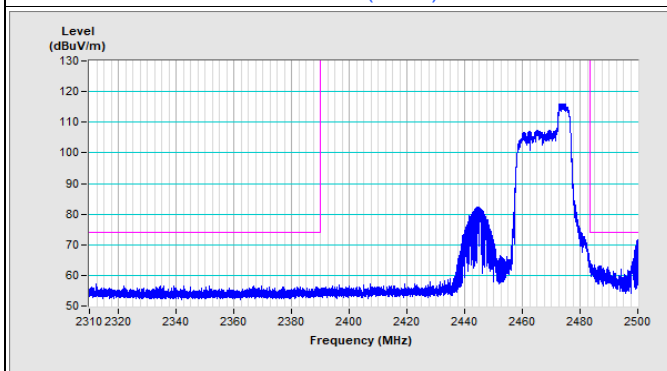


Vertical (Peak)

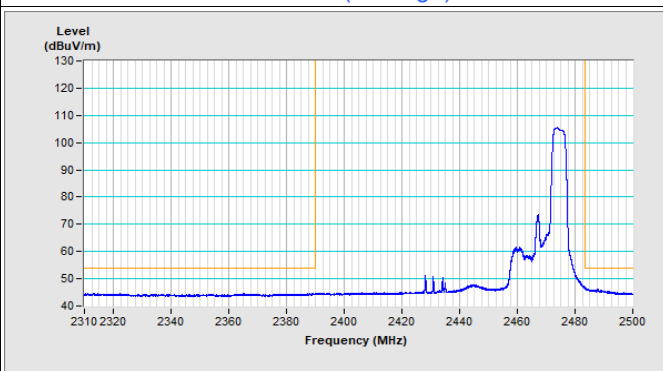


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

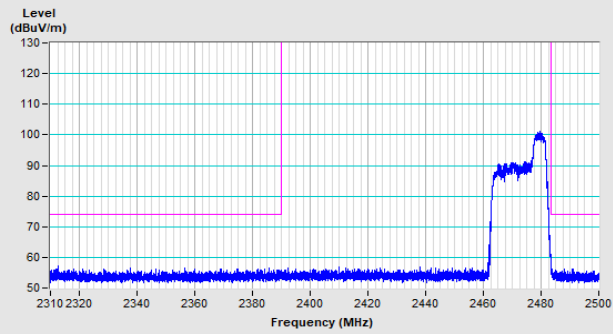


Horizontal (Peak)

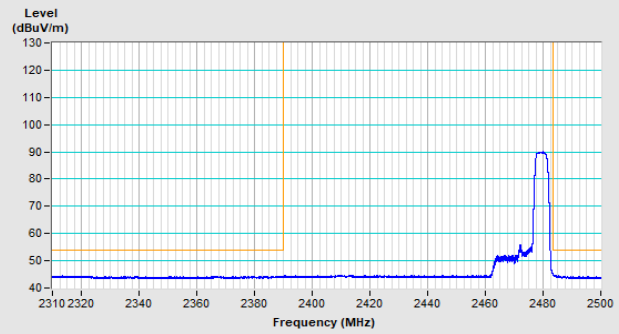

Horizontal (Average)

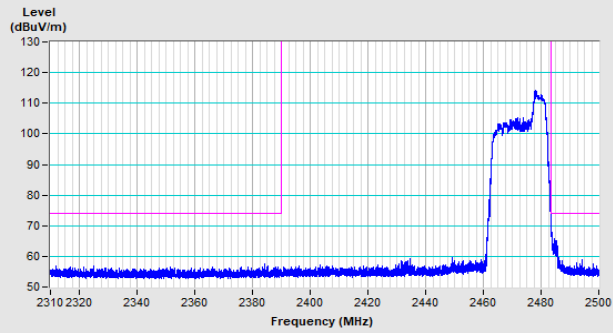


Vertical (Peak)

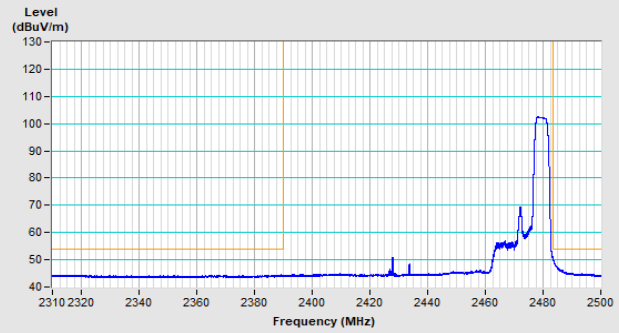


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

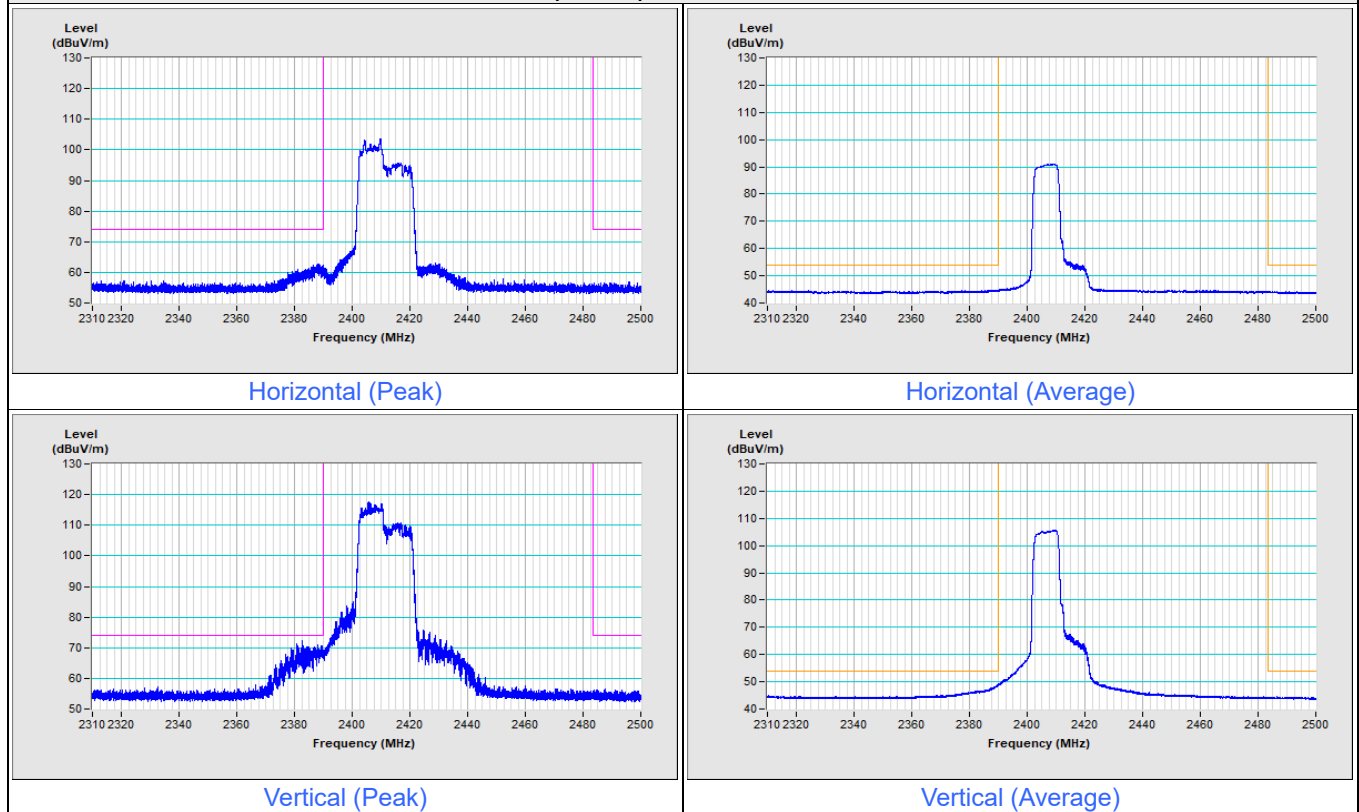


802.11be (EHT20) 106-tone RU Channel 2

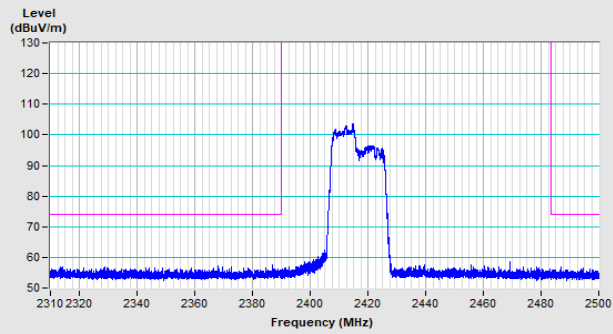


Horizontal (Peak)

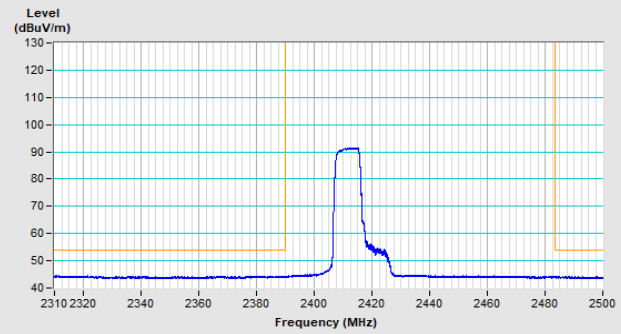

Horizontal (Average)

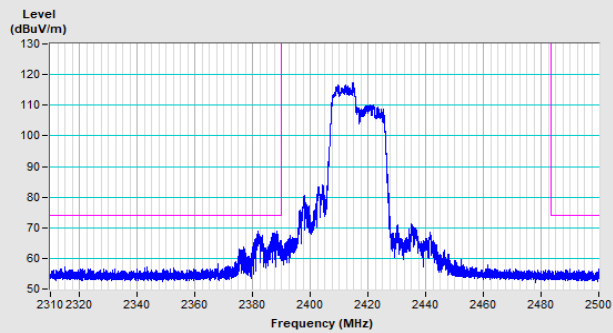


Vertical (Peak)

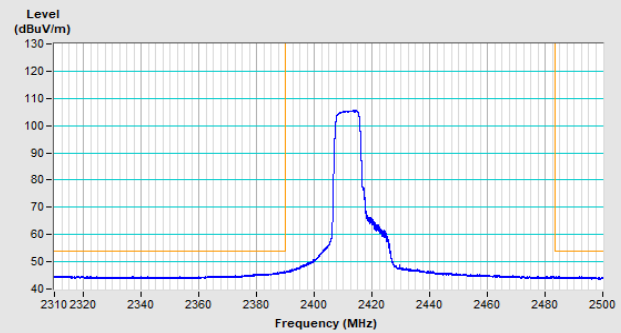


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 10

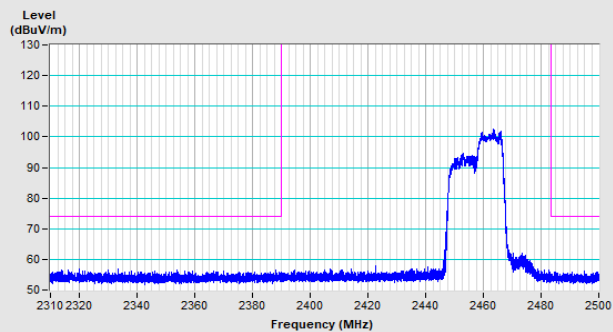


Horizontal (Peak)

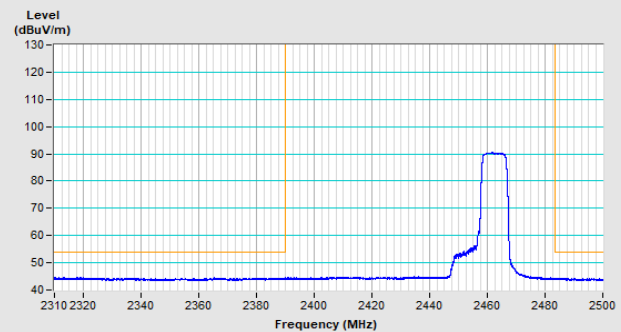

Horizontal (Average)

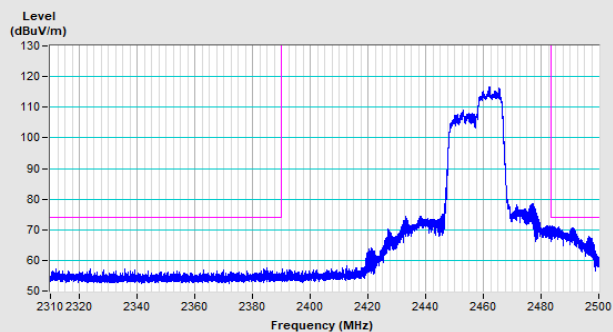


Vertical (Peak)

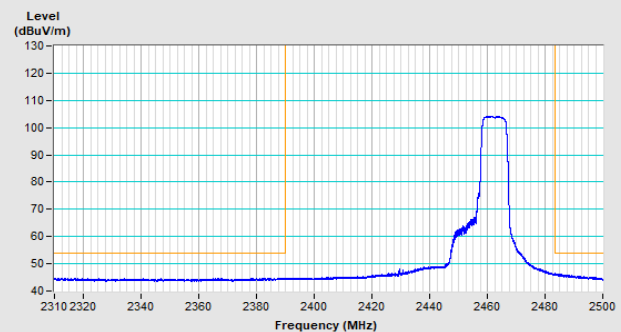


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 11

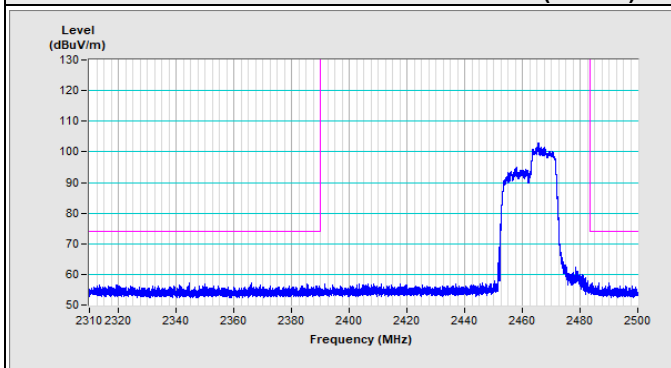


Horizontal (Peak)

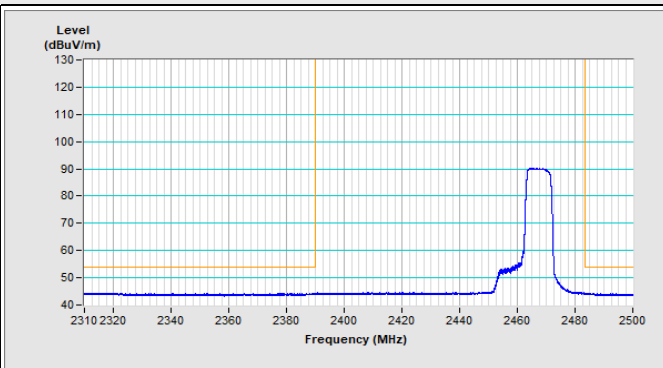

Horizontal (Average)

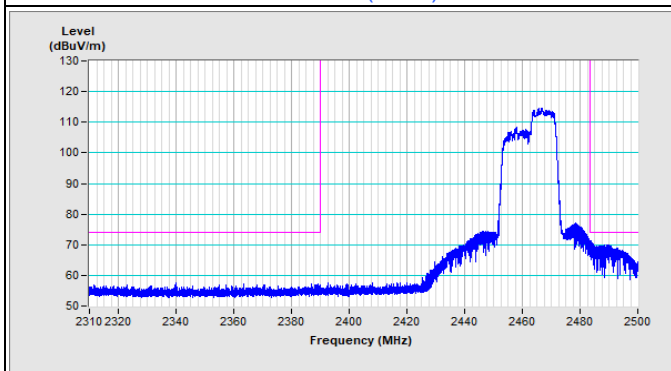


Vertical (Peak)

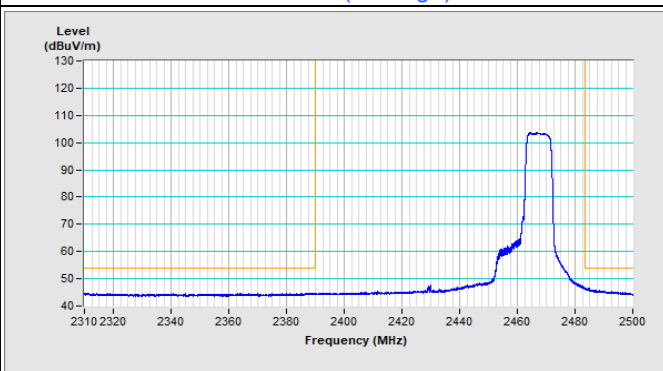


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

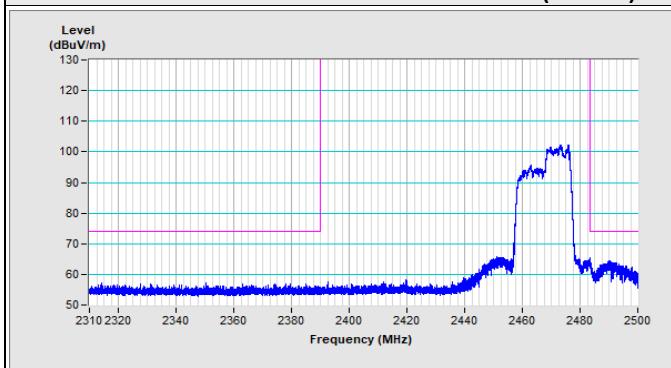


Horizontal (Peak)

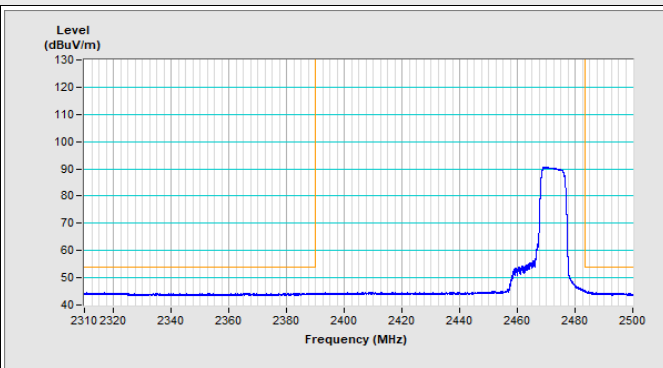

Horizontal (Average)

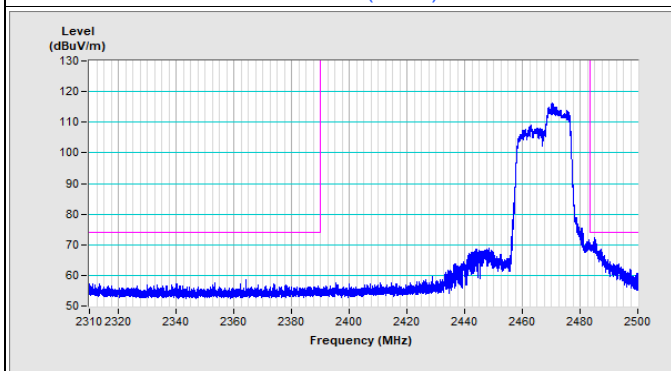


Vertical (Peak)

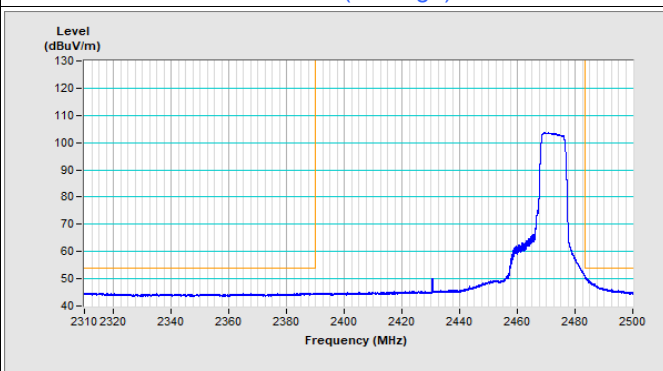


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

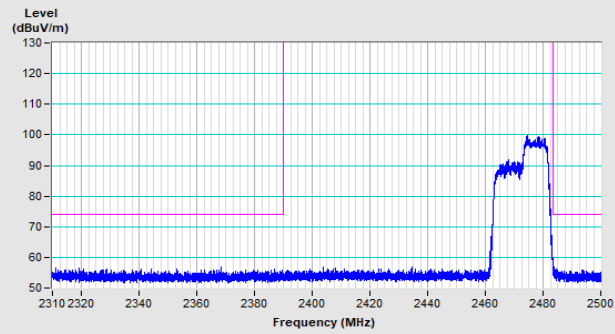


Horizontal (Peak)

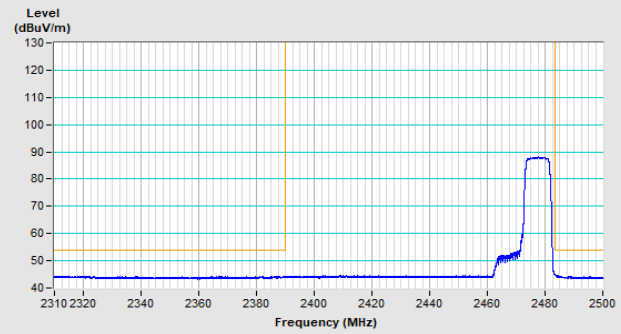

Horizontal (Average)

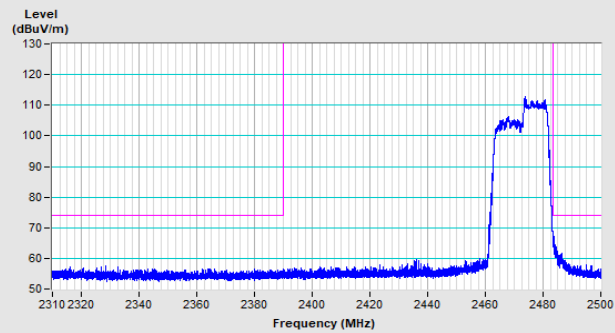


Vertical (Peak)

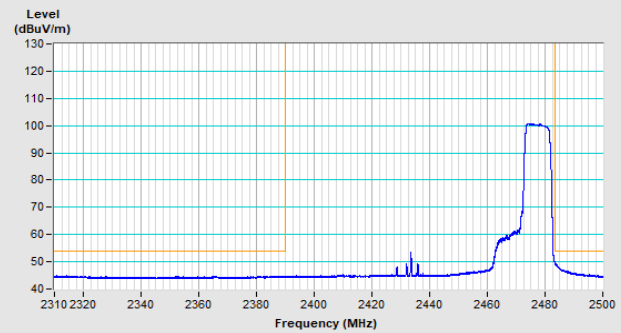


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

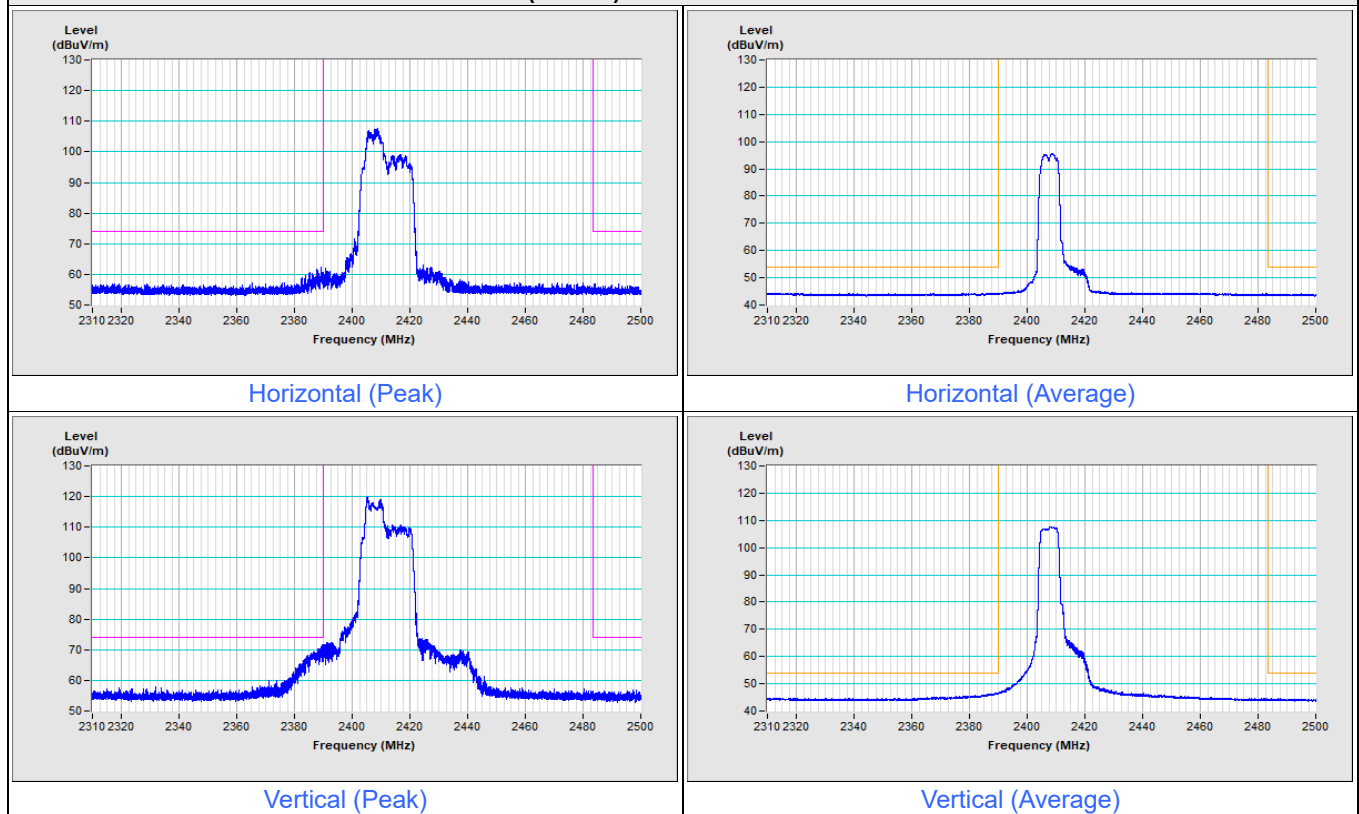


802.11be (EHT20) 52+26-tone MRU Channel 2

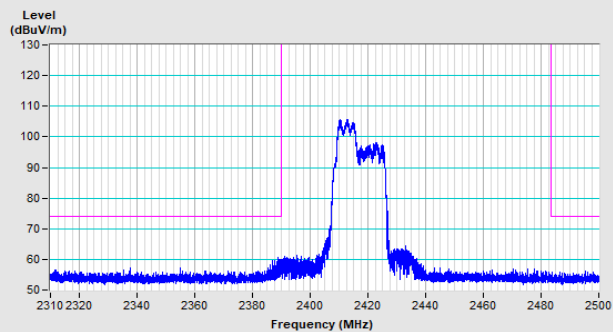


Horizontal (Peak)

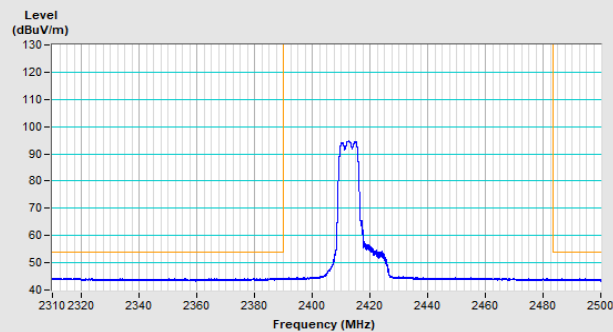

Horizontal (Average)

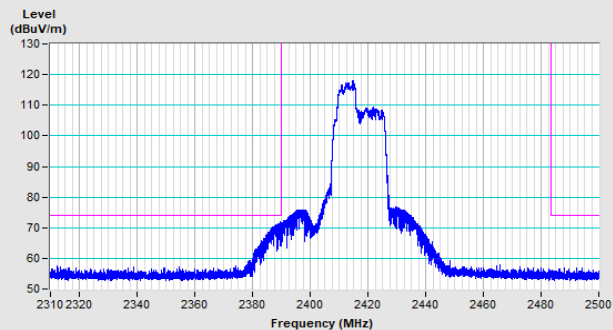


Vertical (Peak)

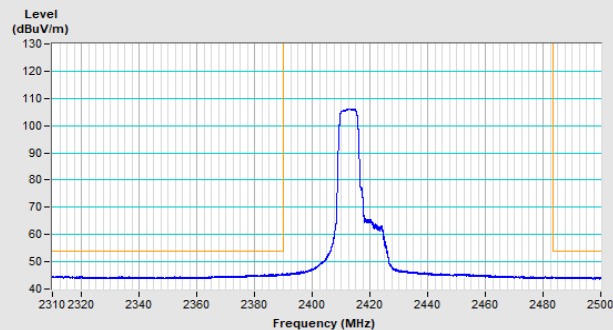


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 10

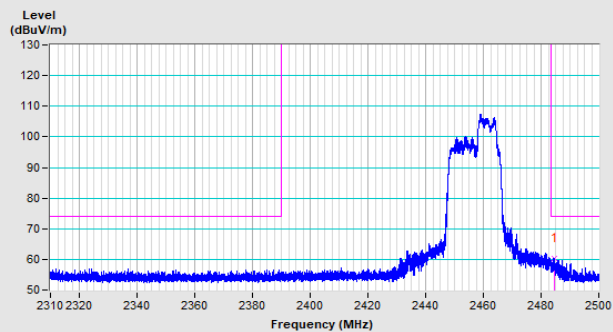


Horizontal (Peak)

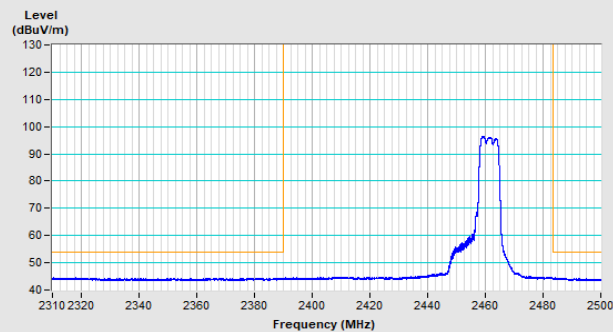

Horizontal (Average)

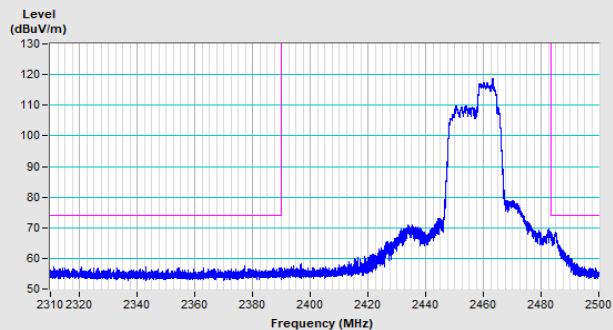


Vertical (Peak)

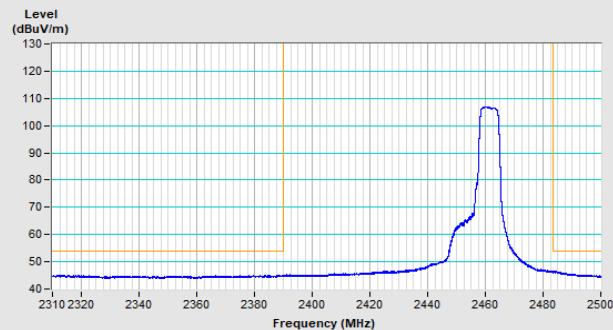


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 11

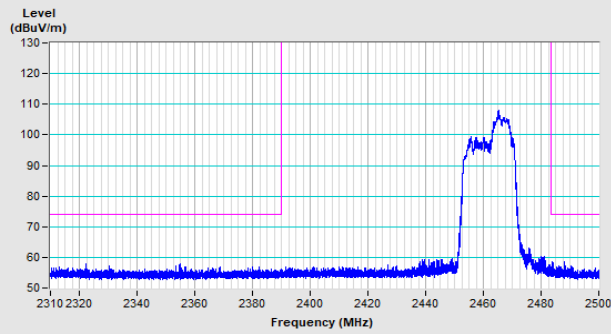


Horizontal (Peak)

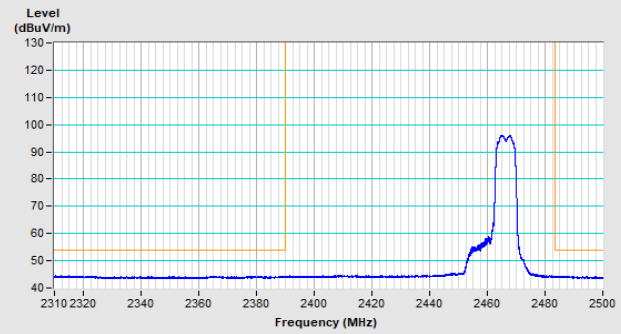

Horizontal (Average)

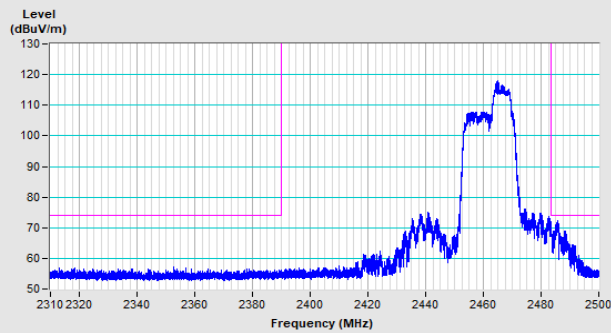


Vertical (Peak)

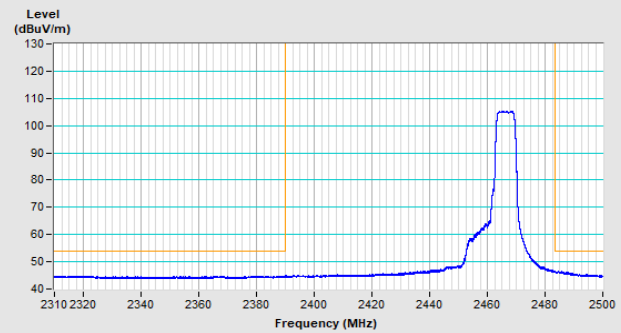


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 12

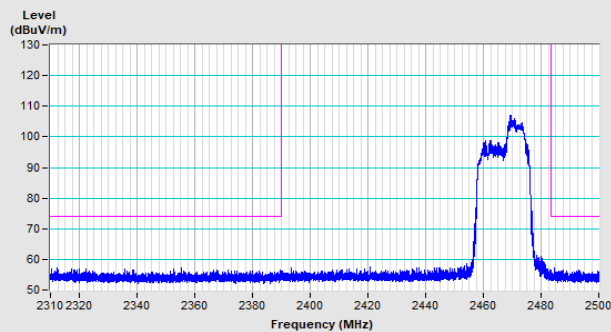


Horizontal (Peak)

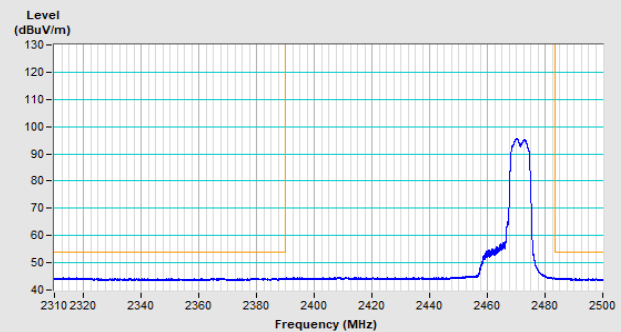

Horizontal (Average)

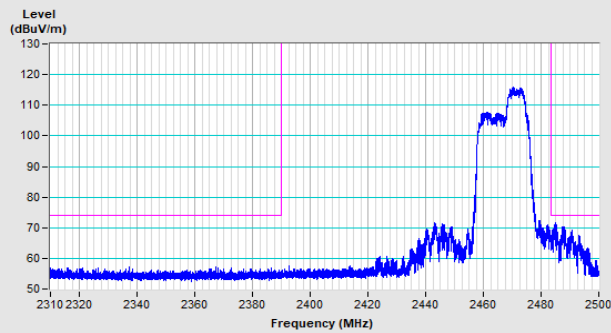


Vertical (Peak)

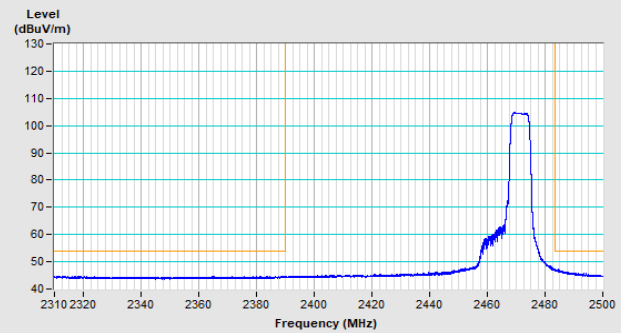


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 13

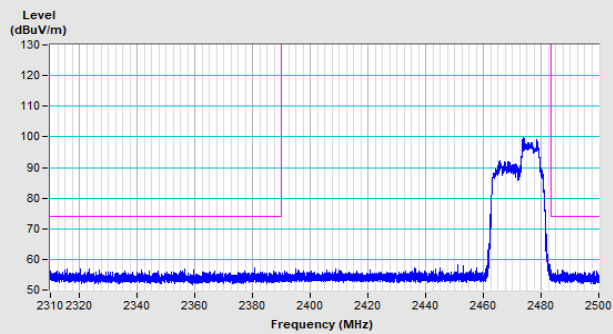


Horizontal (Peak)

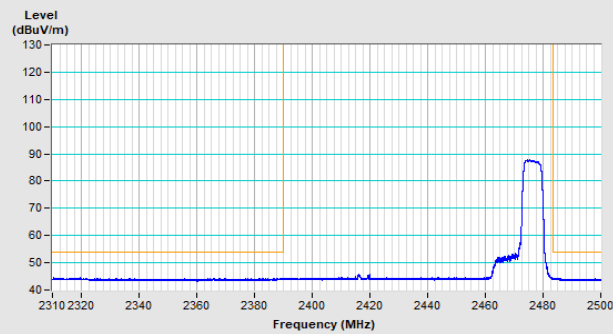

Horizontal (Average)

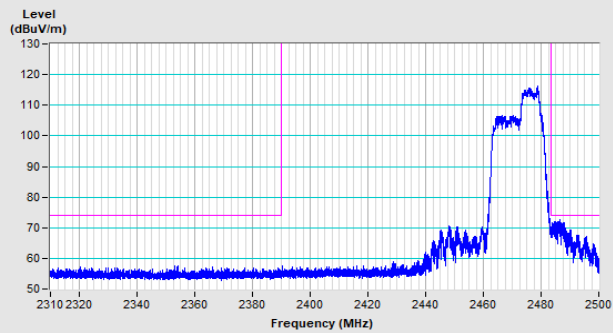


Vertical (Peak)

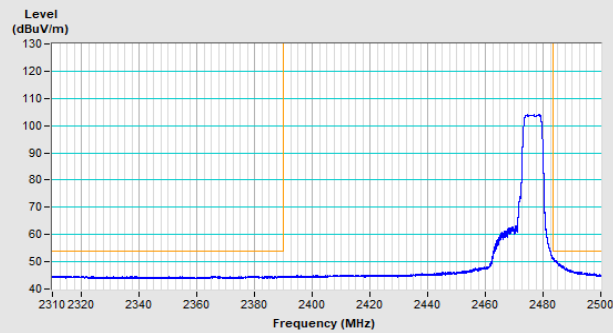


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

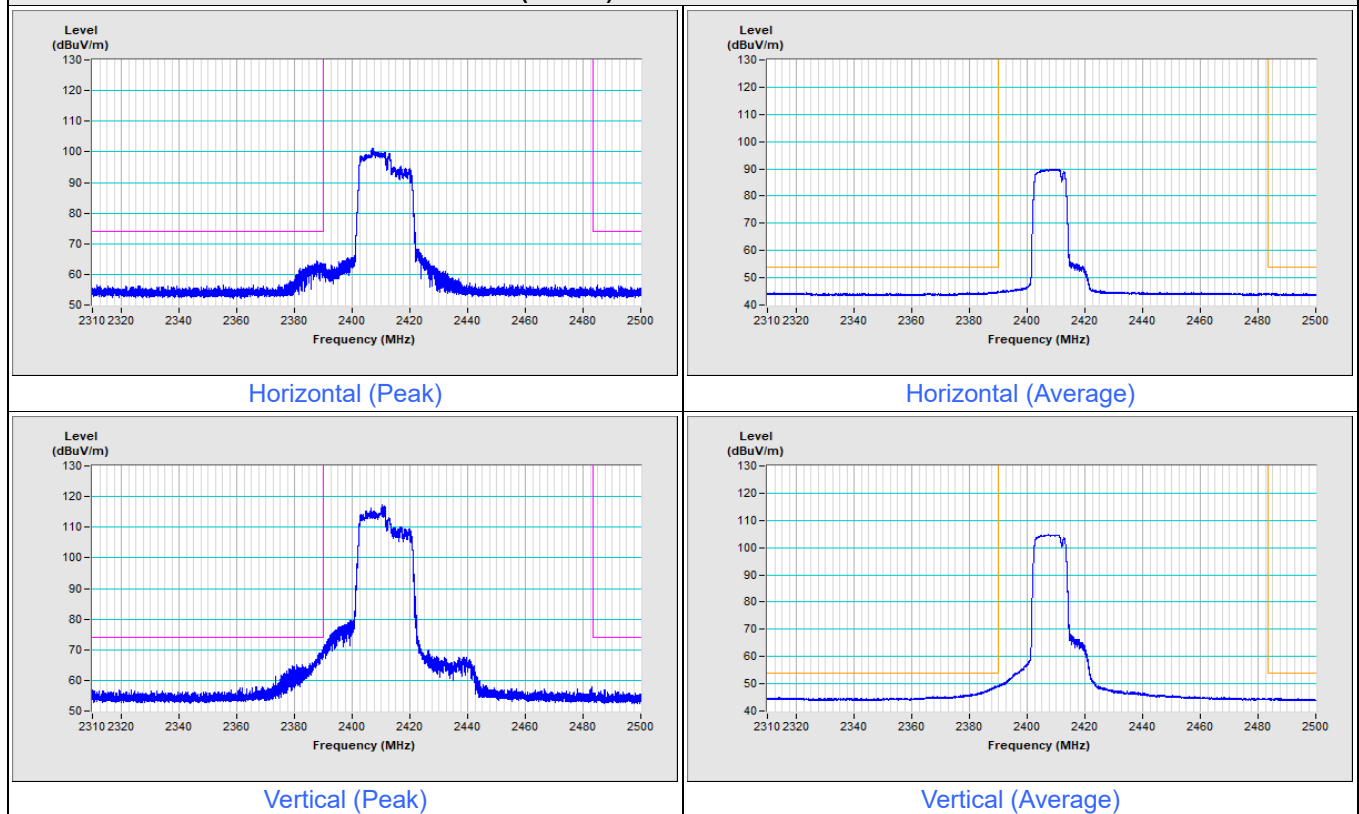


802.11be (EHT20) 106+26-tone MRU Channel 2

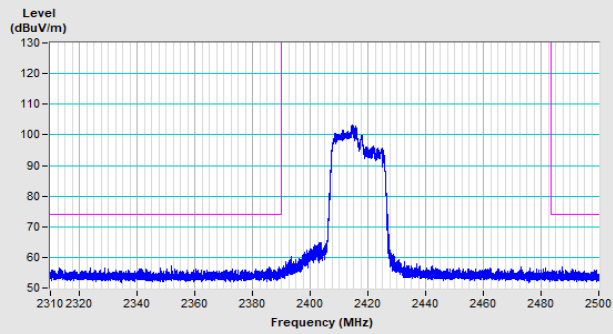


Horizontal (Peak)

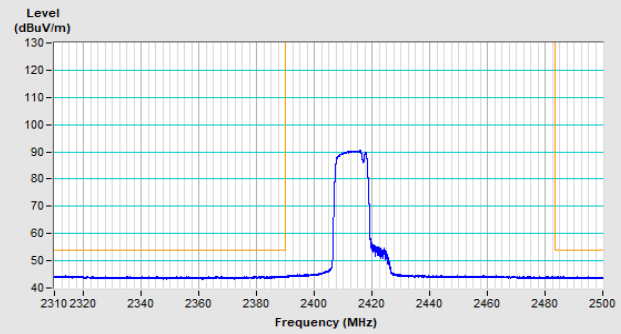

Horizontal (Average)

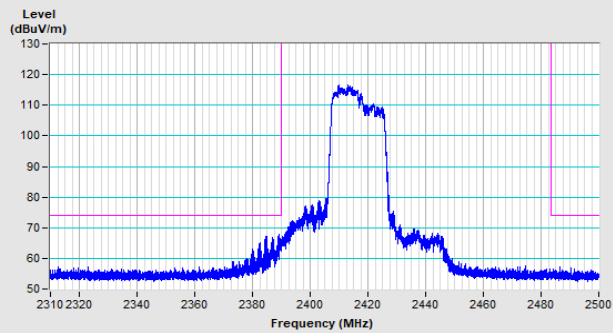


Vertical (Peak)

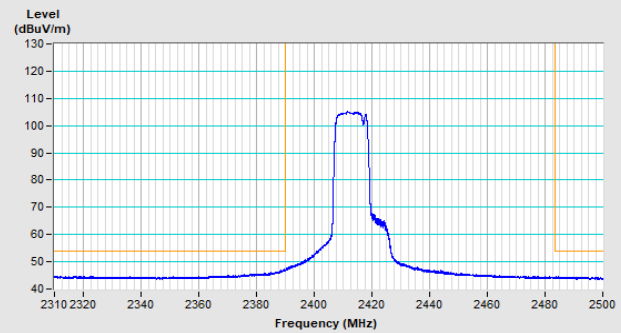


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 10

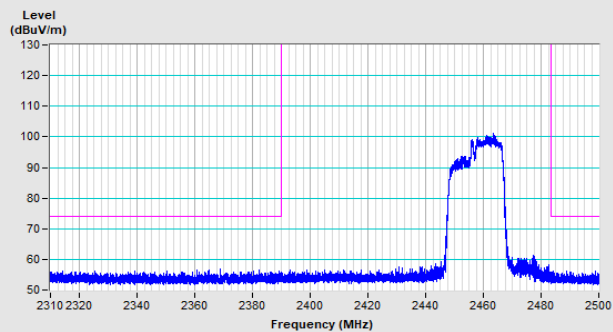


Horizontal (Peak)

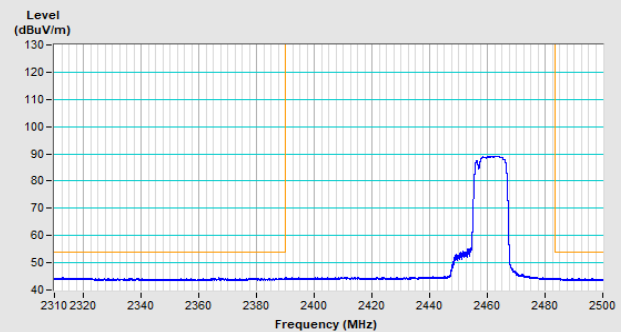

Horizontal (Average)

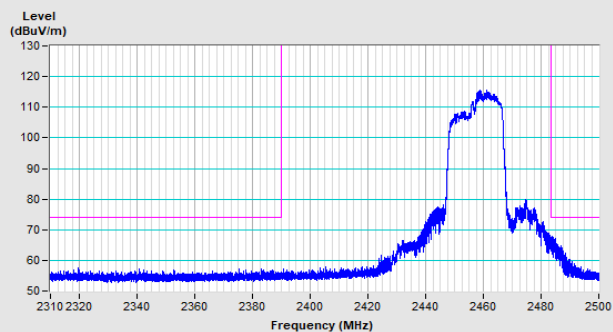


Vertical (Peak)

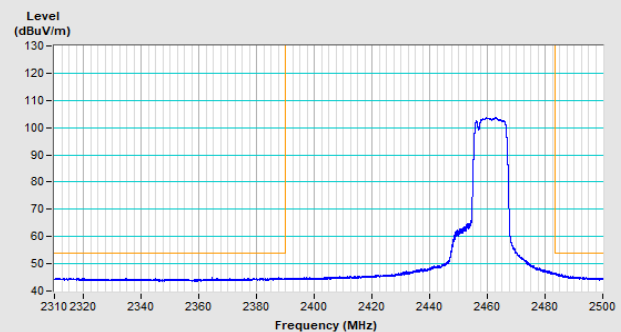


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 11

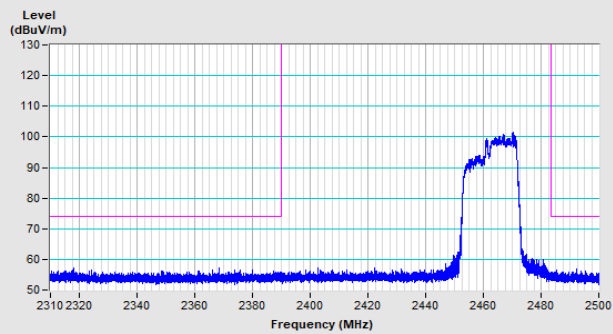


Horizontal (Peak)

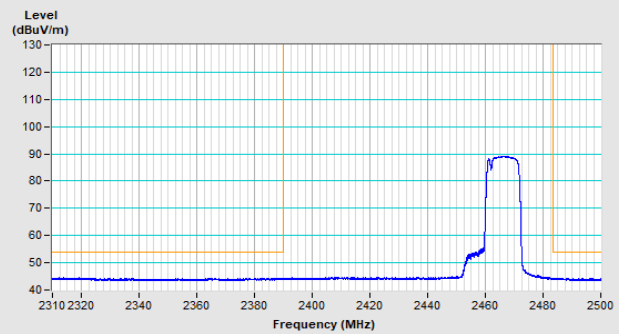

Horizontal (Average)

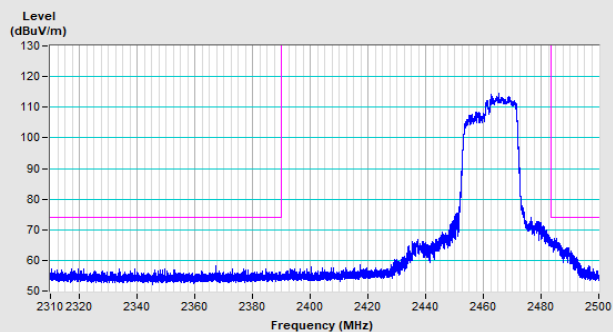


Vertical (Peak)

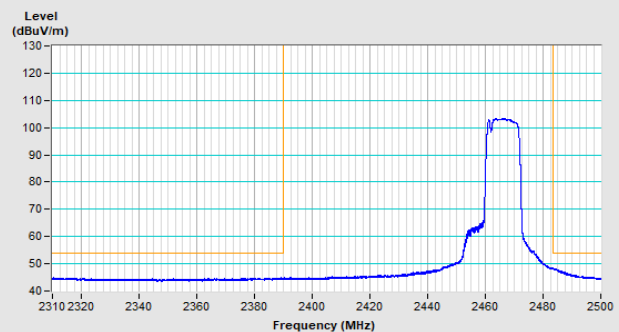


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 12

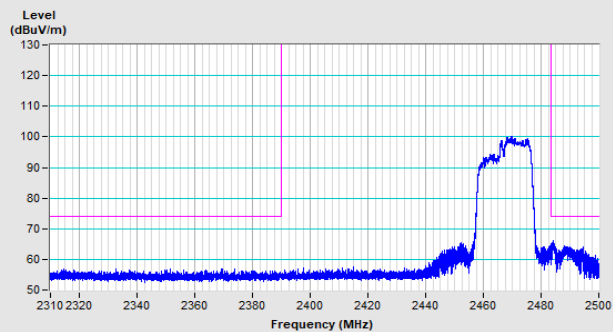


Horizontal (Peak)

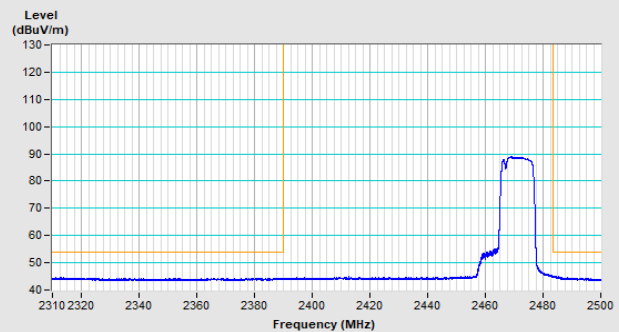

Horizontal (Average)

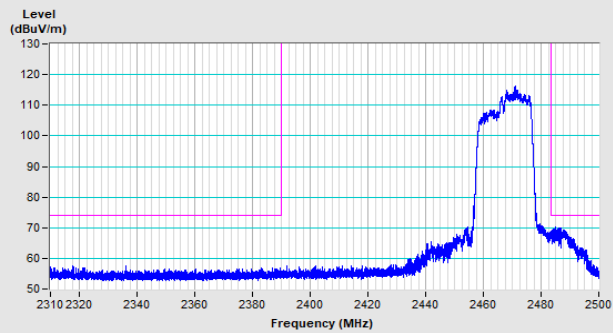


Vertical (Peak)

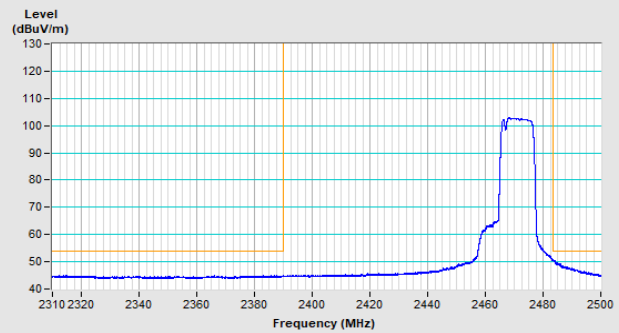


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 13

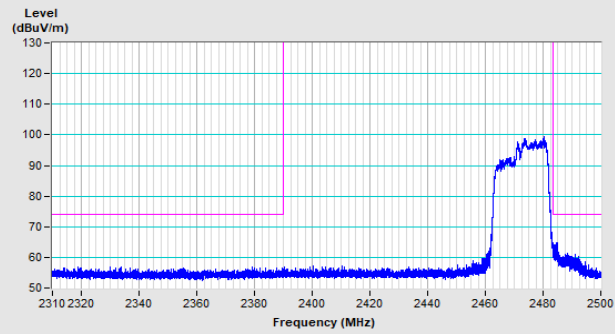


Horizontal (Peak)

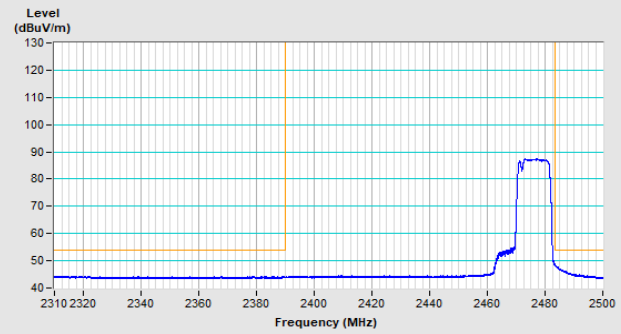

Horizontal (Average)

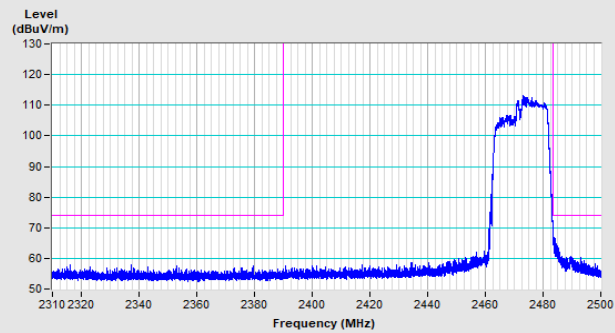

Vertical (Peak)

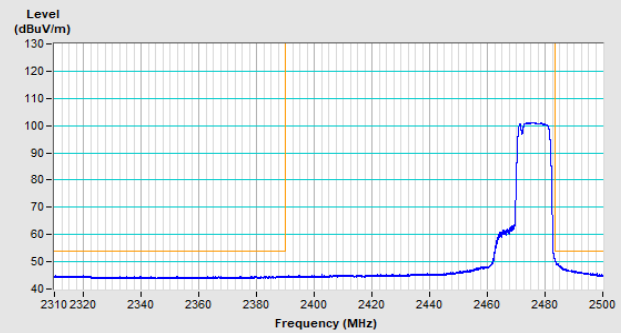

Vertical (Average)

Mode C

2Tx

RF Mode	802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	2.10 H	102	59.1	-2.0
2	2390.00	46.8 AV	54.0	-7.2	2.10 H	102	48.8	-2.0
3	*2412.00	103.1 PK			2.10 H	102	105.2	-2.1
4	*2412.00	98.7 AV			2.10 H	102	100.8	-2.1
5	4824.00	45.6 PK	74.0	-28.4	1.91 H	300	43.5	2.1
6	4824.00	43.0 AV	54.0	-11.0	1.91 H	300	40.9	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.9 PK	74.0	-10.1	1.56 V	54	65.9	-2.0
2	2390.00	51.8 AV	54.0	-2.2	1.56 V	54	53.8	-2.0
3	*2412.00	117.1 PK			1.56 V	54	119.2	-2.1
4	*2412.00	114.9 AV			1.56 V	54	117.0	-2.1
5	4824.00	53.4 PK	74.0	-20.6	1.53 V	131	51.3	2.1
6	4824.00	50.9 AV	54.0	-3.1	1.53 V	131	48.8	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	2.14 H	148	59.1	-2.0
2	2390.00	46.5 AV	54.0	-7.5	2.14 H	148	48.5	-2.0
3	*2417.00	102.5 PK			2.14 H	148	104.6	-2.1
4	*2417.00	100.3 AV			2.14 H	148	102.4	-2.1
5	4834.00	45.4 PK	74.0	-28.6	1.89 H	314	43.3	2.1
6	4834.00	42.8 AV	54.0	-11.2	1.89 H	314	40.7	2.1
7	7251.00	48.2 PK	74.0	-25.8	1.02 H	191	40.6	7.6
8	7251.00	44.2 AV	54.0	-9.8	1.02 H	191	36.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.9 PK	74.0	-14.1	1.57 V	267	61.9	-2.0
2	2390.00	52.2 AV	54.0	-1.8	1.57 V	267	54.2	-2.0
3	*2417.00	116.4 PK			1.57 V	267	118.5	-2.1
4	*2417.00	114.3 AV			1.57 V	267	116.4	-2.1
5	4834.00	53.0 PK	74.0	-21.0	1.55 V	125	50.9	2.1
6	4834.00	50.8 AV	54.0	-3.2	1.55 V	125	48.7	2.1
7	7251.00	54.2 PK	74.0	-19.8	1.75 V	65	46.6	7.6
8	7251.00	50.1 AV	54.0	-3.9	1.75 V	65	42.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	3.99 H	92	57.4	-2.0
2	2390.00	46.4 AV	54.0	-7.6	3.99 H	92	48.4	-2.0
3	*2437.00	121.5 PK			3.99 H	92	123.6	-2.1
4	*2437.00	101.0 AV			3.99 H	92	103.1	-2.1
5	2483.50	55.6 PK	74.0	-18.4	3.99 H	92	58.0	-2.4
6	2483.50	46.8 AV	54.0	-7.2	3.99 H	92	49.2	-2.4
7	4874.00	45.7 PK	74.0	-28.3	1.95 H	315	43.3	2.4
8	4874.00	43.0 AV	54.0	-11.0	1.95 H	315	40.6	2.4
9	7311.00	48.5 PK	74.0	-25.5	1.03 H	201	41.1	7.4
10	7311.00	44.4 AV	54.0	-9.6	1.03 H	201	37.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.52 V	201	60.1	-2.0
2	2390.00	47.4 AV	54.0	-6.6	1.52 V	201	49.4	-2.0
3	*2437.00	116.4 PK			1.52 V	201	118.5	-2.1
4	*2437.00	114.2 AV			1.52 V	201	116.3	-2.1
5	2483.50	59.0 PK	74.0	-15.0	1.52 V	201	61.4	-2.4
6	2483.50	47.7 AV	54.0	-6.3	1.52 V	201	50.1	-2.4
7	4874.00	53.2 PK	74.0	-20.8	1.51 V	128	50.8	2.4
8	4874.00	50.9 AV	54.0	-3.1	1.51 V	128	48.5	2.4
9	7311.00	54.1 PK	74.0	-19.9	1.77 V	70	46.7	7.4
10	7311.00	50.2 AV	54.0	-3.8	1.77 V	70	42.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	105.5 PK			1.38 H	272	107.9	-2.4
2	*2457.00	103.9 AV			1.38 H	272	106.3	-2.4
3	2483.50	57.5 PK	74.0	-16.5	1.38 H	272	59.9	-2.4
4	2483.50	48.2 AV	54.0	-5.8	1.38 H	272	50.6	-2.4
5	4914.00	45.9 PK	74.0	-28.1	1.97 H	327	43.4	2.5
6	4914.00	43.5 AV	54.0	-10.5	1.97 H	327	41.0	2.5
7	7371.00	47.9 PK	74.0	-26.1	1.06 H	205	40.3	7.6
8	7371.00	44.1 AV	54.0	-9.9	1.06 H	205	36.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.1 PK			1.74 V	210	118.5	-2.4
2	*2457.00	113.9 AV			1.74 V	210	116.3	-2.4
3	2483.50	60.5 PK	74.0	-13.5	1.74 V	210	62.9	-2.4
4	2483.50	51.4 AV	54.0	-2.6	1.74 V	210	53.8	-2.4
5	4914.00	53.1 PK	74.0	-20.9	1.51 V	142	50.6	2.5
6	4914.00	50.6 AV	54.0	-3.4	1.51 V	142	48.1	2.5
7	7371.00	54.4 PK	74.0	-19.6	1.74 V	60	46.8	7.6
8	7371.00	50.2 AV	54.0	-3.8	1.74 V	60	42.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.7 PK			1.30 H	274	108.1	-2.4
2	*2462.00	103.5 AV			1.30 H	274	105.9	-2.4
3	2483.50	55.8 PK	74.0	-18.2	1.30 H	274	58.2	-2.4
4	2483.50	45.7 AV	54.0	-8.3	1.30 H	274	48.1	-2.4
5	4924.00	46.5 PK	74.0	-27.5	1.96 H	313	44.0	2.5
6	4924.00	44.0 AV	54.0	-10.0	1.96 H	313	41.5	2.5
7	7386.00	48.5 PK	74.0	-25.5	1.11 H	204	40.8	7.7
8	7386.00	44.5 AV	54.0	-9.5	1.11 H	204	36.8	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.0 PK			1.50 V	189	118.4	-2.4
2	*2462.00	113.9 AV			1.50 V	189	116.3	-2.4
3	2483.50	61.9 PK	74.0	-12.1	1.50 V	189	64.3	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.50 V	189	54.7	-2.4
5	4924.00	53.6 PK	74.0	-20.4	1.47 V	154	51.1	2.5
6	4924.00	50.9 AV	54.0	-3.1	1.47 V	154	48.4	2.5
7	7386.00	54.4 PK	74.0	-19.6	1.69 V	46	46.7	7.7
8	7386.00	50.1 AV	54.0	-3.9	1.69 V	46	42.4	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.0 PK			1.22 H	226	102.4	-2.4
2	*2467.00	98.2 AV			1.22 H	226	100.6	-2.4
3	2483.50	56.3 PK	74.0	-17.7	1.22 H	226	58.7	-2.4
4	2483.50	46.0 AV	54.0	-8.0	1.22 H	226	48.4	-2.4
5	4934.00	46.2 PK	74.0	-27.8	2.01 H	308	43.8	2.4
6	4934.00	44.1 AV	54.0	-9.9	2.01 H	308	41.7	2.4
7	7401.00	49.4 PK	74.0	-24.6	1.01 H	214	41.5	7.9
8	7401.00	45.3 AV	54.0	-8.7	1.01 H	214	37.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.3 PK			2.00 V	147	112.7	-2.4
2	*2467.00	108.1 AV			2.00 V	147	110.5	-2.4
3	2483.50	61.0 PK	74.0	-13.0	2.00 V	147	63.4	-2.4
4	2483.50	52.4 AV	54.0	-1.6	2.00 V	147	54.8	-2.4
5	4934.00	52.8 PK	74.0	-21.2	1.56 V	151	50.4	2.4
6	4934.00	50.1 AV	54.0	-3.9	1.56 V	151	47.7	2.4
7	7401.00	54.2 PK	74.0	-19.8	1.70 V	74	46.3	7.9
8	7401.00	50.1 AV	54.0	-3.9	1.70 V	74	42.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	96.7 PK			1.20 H	271	99.1	-2.4
2	*2472.00	94.3 AV			1.20 H	271	96.7	-2.4
3	2483.50	56.0 PK	74.0	-18.0	1.20 H	271	58.4	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.20 H	271	46.8	-2.4
5	4944.00	46.2 PK	74.0	-27.8	1.96 H	308	43.8	2.4
6	4944.00	43.9 AV	54.0	-10.1	1.96 H	308	41.5	2.4
7	7416.00	48.8 PK	74.0	-25.2	1.07 H	200	40.8	8.0
8	7416.00	44.8 AV	54.0	-9.2	1.07 H	200	36.8	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.5 PK			1.53 V	161	109.9	-2.4
2	*2472.00	105.3 AV			1.53 V	161	107.7	-2.4
3	2483.50	60.5 PK	74.0	-13.5	1.53 V	161	62.9	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.53 V	161	54.8	-2.4
5	4944.00	53.2 PK	74.0	-20.8	1.55 V	138	50.8	2.4
6	4944.00	50.3 AV	54.0	-3.7	1.55 V	138	47.9	2.4
7	7416.00	53.7 PK	74.0	-20.3	1.69 V	84	45.7	8.0
8	7416.00	49.8 AV	54.0	-4.2	1.69 V	84	41.8	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.25 H	228	58.1	-2.0
2	2390.00	44.9 AV	54.0	-9.1	1.25 H	228	46.9	-2.0
3	*2412.00	102.8 PK			1.25 H	228	104.9	-2.1
4	*2412.00	94.4 AV			1.25 H	228	96.5	-2.1
5	4824.00	43.9 PK	74.0	-30.1	1.00 H	312	41.8	2.1
6	4824.00	32.4 AV	54.0	-21.6	1.00 H	312	30.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	1.52 V	55	68.5	-2.0
2	2390.00	52.3 AV	54.0	-1.7	1.52 V	55	54.3	-2.0
3	*2412.00	115.2 PK			1.52 V	55	117.3	-2.1
4	*2412.00	106.4 AV			1.52 V	55	108.5	-2.1
5	4824.00	50.4 PK	74.0	-23.6	1.92 V	83	48.3	2.1
6	4824.00	36.7 AV	54.0	-17.3	1.92 V	83	34.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.6 PK	74.0	-15.4	1.28 H	278	60.6	-2.0
2	2390.00	45.2 AV	54.0	-8.8	1.28 H	278	47.2	-2.0
3	*2417.00	105.3 PK			1.28 H	278	107.4	-2.1
4	*2417.00	96.7 AV			1.28 H	278	98.8	-2.1
5	4834.00	44.2 PK	74.0	-29.8	1.09 H	297	42.1	2.1
6	4834.00	32.9 AV	54.0	-21.1	1.09 H	297	30.8	2.1
7	7251.00	52.4 PK	74.0	-21.6	1.19 H	331	44.8	7.6
8	7251.00	39.9 AV	54.0	-14.1	1.19 H	331	32.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.50 V	47	72.9	-2.0
2	2390.00	52.1 AV	54.0	-1.9	1.50 V	47	54.1	-2.0
3	*2417.00	116.9 PK			1.50 V	47	119.0	-2.1
4	*2417.00	107.9 AV			1.50 V	47	110.0	-2.1
5	4834.00	50.9 PK	74.0	-23.1	1.92 V	80	48.8	2.1
6	4834.00	37.3 AV	54.0	-16.7	1.92 V	80	35.2	2.1
7	7251.00	57.8 PK	74.0	-16.2	1.88 V	99	50.2	7.6
8	7251.00	45.9 AV	54.0	-8.1	1.88 V	99	38.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.21 H	282	59.1	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.21 H	282	46.5	-2.0
3	*2437.00	107.9 PK			1.21 H	282	110.0	-2.1
4	*2437.00	99.4 AV			1.21 H	282	101.5	-2.1
5	2483.50	58.6 PK	74.0	-15.4	1.21 H	282	61.0	-2.4
6	2483.50	45.1 AV	54.0	-8.9	1.21 H	282	47.5	-2.4
7	4874.00	44.3 PK	74.0	-29.7	1.04 H	312	41.9	2.4
8	4874.00	33.2 AV	54.0	-20.8	1.04 H	312	30.8	2.4
9	7311.00	52.4 PK	74.0	-21.6	1.23 H	329	45.0	7.4
10	7311.00	40.2 AV	54.0	-13.8	1.23 H	329	32.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.9 PK	74.0	-5.1	1.59 V	144	70.9	-2.0
2	2390.00	49.9 AV	54.0	-4.1	1.59 V	144	51.9	-2.0
3	*2437.00	118.5 PK			1.59 V	144	120.6	-2.1
4	*2437.00	109.4 AV			1.59 V	144	111.5	-2.1
5	2483.50	67.2 PK	74.0	-6.8	1.59 V	144	69.6	-2.4
6	2483.50	48.8 AV	54.0	-5.2	1.59 V	144	51.2	-2.4
7	4874.00	51.5 PK	74.0	-22.5	1.88 V	95	49.1	2.4
8	4874.00	37.7 AV	54.0	-16.3	1.88 V	95	35.3	2.4
9	7311.00	57.8 PK	74.0	-16.2	1.90 V	91	50.4	7.4
10	7311.00	45.8 AV	54.0	-8.2	1.90 V	91	38.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	103.7 PK			1.21 H	281	106.1	-2.4
2	*2457.00	95.4 AV			1.21 H	281	97.8	-2.4
3	2483.50	57.6 PK	74.0	-16.4	1.21 H	281	60.0	-2.4
4	2483.50	45.1 AV	54.0	-8.9	1.21 H	281	47.5	-2.4
5	4914.00	43.6 PK	74.0	-30.4	1.03 H	302	41.1	2.5
6	4914.00	32.4 AV	54.0	-21.6	1.03 H	302	29.9	2.5
7	7371.00	52.8 PK	74.0	-21.2	1.18 H	340	45.2	7.6
8	7371.00	40.1 AV	54.0	-13.9	1.18 H	340	32.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	116.2 PK			1.80 V	202	118.6	-2.4
2	*2457.00	107.1 AV			1.80 V	202	109.5	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.80 V	202	73.8	-2.4
4	2483.50	51.3 AV	54.0	-2.7	1.80 V	202	53.7	-2.4
5	4914.00	50.7 PK	74.0	-23.3	1.93 V	89	48.2	2.5
6	4914.00	36.9 AV	54.0	-17.1	1.93 V	89	34.4	2.5
7	7371.00	58.4 PK	74.0	-15.6	1.90 V	85	50.8	7.6
8	7371.00	46.3 AV	54.0	-7.7	1.90 V	85	38.7	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.0 PK			1.24 H	221	105.4	-2.4
2	*2462.00	94.2 AV			1.24 H	221	96.6	-2.4
3	2483.50	57.2 PK	74.0	-16.8	1.24 H	221	59.6	-2.4
4	2483.50	44.7 AV	54.0	-9.3	1.24 H	221	47.1	-2.4
5	4924.00	43.5 PK	74.0	-30.5	1.08 H	291	41.0	2.5
6	4924.00	32.2 AV	54.0	-21.8	1.08 H	291	29.7	2.5
7	7386.00	53.2 PK	74.0	-20.8	1.23 H	351	45.5	7.7
8	7386.00	40.2 AV	54.0	-13.8	1.23 H	351	32.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.1 PK			1.73 V	205	117.5	-2.4
2	*2462.00	106.6 AV			1.73 V	205	109.0	-2.4
3	2483.50	66.8 PK	74.0	-7.2	1.73 V	205	69.2	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.73 V	205	53.6	-2.4
5	4924.00	50.4 PK	74.0	-23.6	1.97 V	75	47.9	2.5
6	4924.00	36.8 AV	54.0	-17.2	1.97 V	75	34.3	2.5
7	7386.00	58.2 PK	74.0	-15.8	1.94 V	77	50.5	7.7
8	7386.00	46.0 AV	54.0	-8.0	1.94 V	77	38.3	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.5 PK			1.33 H	269	105.9	-2.4
2	*2467.00	95.0 AV			1.33 H	269	97.4	-2.4
3	2483.50	60.7 PK	74.0	-13.3	1.33 H	269	63.1	-2.4
4	2483.50	46.6 AV	54.0	-7.4	1.33 H	269	49.0	-2.4
5	4934.00	43.2 PK	74.0	-30.8	1.05 H	298	40.8	2.4
6	4934.00	32.1 AV	54.0	-21.9	1.05 H	298	29.7	2.4
7	7401.00	53.2 PK	74.0	-20.8	1.20 H	350	45.3	7.9
8	7401.00	40.0 AV	54.0	-14.0	1.20 H	350	32.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.0 PK			1.50 V	153	117.4	-2.4
2	*2467.00	106.0 AV			1.50 V	153	108.4	-2.4
3	2483.50	68.0 PK	74.0	-6.0	1.50 V	153	70.4	-2.4
4	2483.50	52.1 AV	54.0	-1.9	1.50 V	153	54.5	-2.4
5	4934.00	50.4 PK	74.0	-23.6	1.97 V	71	48.0	2.4
6	4934.00	36.6 AV	54.0	-17.4	1.97 V	71	34.2	2.4
7	7401.00	58.2 PK	74.0	-15.8	1.96 V	82	50.3	7.9
8	7401.00	46.2 AV	54.0	-7.8	1.96 V	82	38.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 70% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.8 PK			1.34 H	274	102.2	-2.4
2	*2472.00	91.5 AV			1.34 H	274	93.9	-2.4
3	2483.50	64.5 PK	74.0	-9.5	1.34 H	274	66.9	-2.4
4	2483.50	44.0 AV	54.0	-10.0	1.34 H	274	46.4	-2.4
5	4944.00	43.1 PK	74.0	-30.9	1.08 H	285	40.7	2.4
6	4944.00	32.2 AV	54.0	-21.8	1.08 H	285	29.8	2.4
7	7416.00	53.4 PK	74.0	-20.6	1.17 H	5	45.4	8.0
8	7416.00	40.0 AV	54.0	-14.0	1.17 H	5	32.0	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.1 PK			1.50 V	152	114.5	-2.4
2	*2472.00	103.2 AV			1.50 V	152	105.6	-2.4
3	2483.50	70.4 PK	74.0	-3.6	1.50 V	152	72.8	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.50 V	152	54.7	-2.4
5	4944.00	50.3 PK	74.0	-23.7	1.99 V	70	47.9	2.4
6	4944.00	36.7 AV	54.0	-17.3	1.99 V	70	34.3	2.4
7	7416.00	58.4 PK	74.0	-15.6	2.02 V	71	50.4	8.0
8	7416.00	46.2 AV	54.0	-7.8	2.02 V	71	38.2	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	1.26 H	245	57.7	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.26 H	245	46.6	-2.0
3	*2412.00	104.3 PK			1.26 H	245	106.4	-2.1
4	*2412.00	92.1 AV			1.26 H	245	94.2	-2.1
5	4824.00	43.3 PK	74.0	-30.7	1.14 H	331	41.2	2.1
6	4824.00	32.4 AV	54.0	-21.6	1.14 H	331	30.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.16 V	48	68.9	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.16 V	48	54.4	-2.0
3	*2412.00	117.2 PK			1.16 V	48	119.3	-2.1
4	*2412.00	106.0 AV			1.16 V	48	108.1	-2.1
5	4824.00	47.9 PK	74.0	-26.1	1.88 V	65	45.8	2.1
6	4824.00	36.7 AV	54.0	-17.3	1.88 V	65	34.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.05 H	244	61.3	-2.0
2	2390.00	44.8 AV	54.0	-9.2	1.05 H	244	46.8	-2.0
3	*2417.00	104.5 PK			1.05 H	244	106.6	-2.1
4	*2417.00	93.6 AV			1.05 H	244	95.7	-2.1
5	4834.00	43.2 PK	74.0	-30.8	1.11 H	315	41.1	2.1
6	4834.00	32.2 AV	54.0	-21.8	1.11 H	315	30.1	2.1
7	7251.00	49.2 PK	74.0	-24.8	1.43 H	330	41.6	7.6
8	7251.00	38.8 AV	54.0	-15.2	1.43 H	330	31.2	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.50 V	48	67.5	-2.0
2	2390.00	51.8 AV	54.0	-2.2	1.50 V	48	53.8	-2.0
3	*2417.00	118.4 PK			1.50 V	48	120.5	-2.1
4	*2417.00	107.3 AV			1.50 V	48	109.4	-2.1
5	4834.00	47.7 PK	74.0	-26.3	1.92 V	72	45.6	2.1
6	4834.00	36.4 AV	54.0	-17.6	1.92 V	72	34.3	2.1
7	7251.00	55.7 PK	74.0	-18.3	2.20 V	102	48.1	7.6
8	7251.00	44.2 AV	54.0	-9.8	2.20 V	102	36.6	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.58 H	320	59.5	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.58 H	320	47.0	-2.0
3	*2437.00	105.9 PK			1.58 H	320	108.0	-2.1
4	*2437.00	97.0 AV			1.58 H	320	99.1	-2.1
5	2483.50	56.9 PK	74.0	-17.1	1.58 H	320	59.3	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.58 H	320	46.6	-2.4
7	4874.00	43.6 PK	74.0	-30.4	1.14 H	314	41.2	2.4
8	4874.00	32.5 AV	54.0	-21.5	1.14 H	314	30.1	2.4
9	7311.00	49.2 PK	74.0	-24.8	1.47 H	326	41.8	7.4
10	7311.00	39.0 AV	54.0	-15.0	1.47 H	326	31.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.7 PK	74.0	-3.3	1.45 V	48	72.7	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.45 V	48	54.4	-2.0
3	*2437.00	120.0 PK			1.45 V	48	122.1	-2.1
4	*2437.00	108.5 AV			1.45 V	48	110.6	-2.1
5	2483.50	68.7 PK	74.0	-5.3	1.45 V	48	71.1	-2.4
6	2483.50	49.6 AV	54.0	-4.4	1.45 V	48	52.0	-2.4
7	4874.00	48.4 PK	74.0	-25.6	1.87 V	93	46.0	2.4
8	4874.00	37.0 AV	54.0	-17.0	1.87 V	93	34.6	2.4
9	7311.00	54.7 PK	74.0	-19.3	2.24 V	87	47.3	7.4
10	7311.00	43.6 AV	54.0	-10.4	2.24 V	87	36.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	104.7 PK			1.19 H	316	107.1	-2.4
2	*2457.00	92.7 AV			1.19 H	316	95.1	-2.4
3	2483.50	59.6 PK	74.0	-14.4	1.19 H	316	62.0	-2.4
4	2483.50	45.2 AV	54.0	-8.8	1.19 H	316	47.6	-2.4
5	4914.00	42.7 PK	74.0	-31.3	1.14 H	312	40.2	2.5
6	4914.00	31.8 AV	54.0	-22.2	1.14 H	312	29.3	2.5
7	7371.00	49.2 PK	74.0	-24.8	1.45 H	336	41.6	7.6
8	7371.00	38.6 AV	54.0	-15.4	1.45 H	336	31.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	117.4 PK			1.50 V	203	119.8	-2.4
2	*2457.00	106.6 AV			1.50 V	203	109.0	-2.4
3	2483.50	68.5 PK	74.0	-5.5	1.50 V	203	70.9	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.50 V	203	54.8	-2.4
5	4914.00	48.3 PK	74.0	-25.7	1.89 V	81	45.8	2.5
6	4914.00	36.8 AV	54.0	-17.2	1.89 V	81	34.3	2.5
7	7371.00	54.9 PK	74.0	-19.1	2.24 V	94	47.3	7.6
8	7371.00	43.7 AV	54.0	-10.3	2.24 V	94	36.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.5 PK			1.06 H	318	104.9	-2.4
2	*2462.00	92.1 AV			1.06 H	318	94.5	-2.4
3	2483.50	60.3 PK	74.0	-13.7	1.06 H	318	62.7	-2.4
4	2483.50	46.1 AV	54.0	-7.9	1.06 H	318	48.5	-2.4
5	4924.00	43.3 PK	74.0	-30.7	1.13 H	314	40.8	2.5
6	4924.00	32.2 AV	54.0	-21.8	1.13 H	314	29.7	2.5
7	7386.00	49.6 PK	74.0	-24.4	1.42 H	343	41.9	7.7
8	7386.00	38.8 AV	54.0	-15.2	1.42 H	343	31.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.6 PK			1.76 V	201	119.0	-2.4
2	*2462.00	105.1 AV			1.76 V	201	107.5	-2.4
3	2483.50	66.3 PK	74.0	-7.7	1.76 V	201	68.7	-2.4
4	2483.50	51.7 AV	54.0	-2.3	1.76 V	201	54.1	-2.4
5	4924.00	48.4 PK	74.0	-25.6	1.95 V	84	45.9	2.5
6	4924.00	36.9 AV	54.0	-17.1	1.95 V	84	34.4	2.5
7	7386.00	54.5 PK	74.0	-19.5	2.29 V	94	46.8	7.7
8	7386.00	43.2 AV	54.0	-10.8	2.29 V	94	35.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	102.3 PK			1.06 H	319	104.7	-2.4
2	*2467.00	92.2 AV			1.06 H	319	94.6	-2.4
3	2483.50	60.5 PK	74.0	-13.5	1.06 H	319	62.9	-2.4
4	2483.50	46.2 AV	54.0	-7.8	1.06 H	319	48.6	-2.4
5	4934.00	42.7 PK	74.0	-31.3	1.07 H	306	40.3	2.4
6	4934.00	31.9 AV	54.0	-22.1	1.07 H	306	29.5	2.4
7	7401.00	49.5 PK	74.0	-24.5	1.36 H	330	41.6	7.9
8	7401.00	38.7 AV	54.0	-15.3	1.36 H	330	30.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	116.4 PK			1.78 V	190	118.8	-2.4
2	*2467.00	104.8 AV			1.78 V	190	107.2	-2.4
3	2483.50	65.9 PK	74.0	-8.1	1.78 V	190	68.3	-2.4
4	2483.50	51.9 AV	54.0	-2.1	1.78 V	190	54.3	-2.4
5	4934.00	48.0 PK	74.0	-26.0	1.88 V	71	45.6	2.4
6	4934.00	36.9 AV	54.0	-17.1	1.88 V	71	34.5	2.4
7	7401.00	55.4 PK	74.0	-18.6	2.24 V	114	47.5	7.9
8	7401.00	43.9 AV	54.0	-10.1	2.24 V	114	36.0	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.7 PK			1.10 H	318	102.1	-2.4
2	*2472.00	88.9 AV			1.10 H	318	91.3	-2.4
3	2483.50	58.9 PK	74.0	-15.1	1.10 H	318	61.3	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.10 H	318	47.2	-2.4
5	4944.00	42.1 PK	74.0	-31.9	1.09 H	319	39.7	2.4
6	4944.00	31.5 AV	54.0	-22.5	1.09 H	319	29.1	2.4
7	7416.00	49.3 PK	74.0	-24.7	1.40 H	334	41.3	8.0
8	7416.00	38.7 AV	54.0	-15.3	1.40 H	334	30.7	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.9 PK			1.50 V	152	117.3	-2.4
2	*2472.00	102.6 AV			1.50 V	152	105.0	-2.4
3	2483.50	66.8 PK	74.0	-7.2	1.50 V	152	69.2	-2.4
4	2483.50	52.3 AV	54.0	-1.7	1.50 V	152	54.7	-2.4
5	4944.00	48.3 PK	74.0	-25.7	1.91 V	87	45.9	2.4
6	4944.00	36.6 AV	54.0	-17.4	1.91 V	87	34.2	2.4
7	7416.00	54.4 PK	74.0	-19.6	2.23 V	88	46.4	8.0
8	7416.00	43.5 AV	54.0	-10.5	2.23 V	88	35.5	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	1.26 H	249	59.7	-2.0
2	2390.00	44.3 AV	54.0	-9.7	1.26 H	249	46.3	-2.0
3	*2422.00	100.0 PK			1.26 H	249	102.1	-2.1
4	*2422.00	89.1 AV			1.26 H	249	91.2	-2.1
5	4844.00	38.9 PK	74.0	-35.1	1.06 H	360	36.7	2.2
6	4844.00	27.6 AV	54.0	-26.4	1.06 H	360	25.4	2.2
7	7266.00	45.1 PK	74.0	-28.9	1.28 H	314	37.5	7.6
8	7266.00	32.6 AV	54.0	-21.4	1.28 H	314	25.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	1.44 V	61	69.1	-2.0
2	2390.00	52.4 AV	54.0	-1.6	1.44 V	61	54.4	-2.0
3	*2422.00	113.2 PK			1.44 V	61	115.3	-2.1
4	*2422.00	102.1 AV			1.44 V	61	104.2	-2.1
5	4844.00	41.5 PK	74.0	-32.5	2.12 V	84	39.3	2.2
6	4844.00	30.2 AV	54.0	-23.8	2.12 V	84	28.0	2.2
7	7266.00	48.0 PK	74.0	-26.0	1.79 V	76	40.4	7.6
8	7266.00	35.9 AV	54.0	-18.1	1.79 V	76	28.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.17 H	247	59.5	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.17 H	247	47.0	-2.0
3	*2437.00	101.0 PK			1.17 H	247	103.1	-2.1
4	*2437.00	89.7 AV			1.17 H	247	91.8	-2.1
5	2483.50	56.7 PK	74.0	-17.3	1.17 H	247	59.1	-2.4
6	2483.50	44.4 AV	54.0	-9.6	1.17 H	247	46.8	-2.4
7	4874.00	39.0 PK	74.0	-35.0	1.01 H	351	36.6	2.4
8	4874.00	27.8 AV	54.0	-26.2	1.01 H	351	25.4	2.4
9	7311.00	45.3 PK	74.0	-28.7	1.23 H	330	37.9	7.4
10	7311.00	33.0 AV	54.0	-21.0	1.23 H	330	25.6	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.81 V	147	69.6	-2.0
2	2390.00	51.7 AV	54.0	-2.3	1.81 V	147	53.7	-2.0
3	*2437.00	113.6 PK			1.81 V	147	115.7	-2.1
4	*2437.00	102.7 AV			1.81 V	147	104.8	-2.1
5	2483.50	66.8 PK	74.0	-7.2	1.81 V	147	69.2	-2.4
6	2483.50	52.4 AV	54.0	-1.6	1.81 V	147	54.8	-2.4
7	4874.00	41.5 PK	74.0	-32.5	2.06 V	75	39.1	2.4
8	4874.00	30.1 AV	54.0	-23.9	2.06 V	75	27.7	2.4
9	7311.00	47.4 PK	74.0	-26.6	1.84 V	91	40.0	7.4
10	7311.00	35.5 AV	54.0	-18.5	1.84 V	91	28.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	99.9 PK			1.24 H	318	102.1	-2.2
2	*2452.00	88.3 AV			1.24 H	318	90.5	-2.2
3	2483.50	59.4 PK	74.0	-14.6	1.24 H	318	61.8	-2.4
4	2483.50	45.2 AV	54.0	-8.8	1.24 H	318	47.6	-2.4
5	4904.00	38.9 PK	74.0	-35.1	1.11 H	359	36.4	2.5
6	4904.00	27.7 AV	54.0	-26.3	1.11 H	359	25.2	2.5
7	7356.00	45.0 PK	74.0	-29.0	1.27 H	305	37.5	7.5
8	7356.00	32.6 AV	54.0	-21.4	1.27 H	305	25.1	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	113.8 PK			1.87 V	197	116.0	-2.2
2	*2452.00	102.2 AV			1.87 V	197	104.4	-2.2
3	2483.50	66.6 PK	74.0	-7.4	1.87 V	197	69.0	-2.4
4	2483.50	51.6 AV	54.0	-2.4	1.87 V	197	54.0	-2.4
5	4904.00	41.3 PK	74.0	-32.7	2.14 V	80	38.8	2.5
6	4904.00	29.8 AV	54.0	-24.2	2.14 V	80	27.3	2.5
7	7356.00	47.8 PK	74.0	-26.2	1.84 V	76	40.3	7.5
8	7356.00	35.8 AV	54.0	-18.2	1.84 V	76	28.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	97.1 PK			1.21 H	269	99.5	-2.4
2	*2457.00	87.5 AV			1.21 H	269	89.9	-2.4
3	2483.50	57.5 PK	74.0	-16.5	1.21 H	269	59.9	-2.4
4	2483.50	44.7 AV	54.0	-9.3	1.21 H	269	47.1	-2.4
5	4914.00	38.6 PK	74.0	-35.4	1.07 H	3	36.1	2.5
6	4914.00	27.5 AV	54.0	-26.5	1.07 H	3	25.0	2.5
7	7371.00	44.2 PK	74.0	-29.8	1.28 H	304	36.6	7.6
8	7371.00	32.1 AV	54.0	-21.9	1.28 H	304	24.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.2 PK			1.45 V	50	115.6	-2.4
2	*2457.00	100.8 AV			1.45 V	50	103.2	-2.4
3	2483.50	68.3 PK	74.0	-5.7	1.45 V	50	70.7	-2.4
4	2483.50	52.1 AV	54.0	-1.9	1.45 V	50	54.5	-2.4
5	4914.00	41.3 PK	74.0	-32.7	2.20 V	87	38.8	2.5
6	4914.00	29.9 AV	54.0	-24.1	2.20 V	87	27.4	2.5
7	7371.00	47.9 PK	74.0	-26.1	1.81 V	73	40.3	7.6
8	7371.00	35.8 AV	54.0	-18.2	1.81 V	73	28.2	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	95.2 PK			1.22 H	320	97.6	-2.4
2	*2462.00	84.6 AV			1.22 H	320	87.0	-2.4
3	2483.50	60.3 PK	74.0	-13.7	1.22 H	320	62.7	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.22 H	320	46.6	-2.4
5	4924.00	38.0 PK	74.0	-36.0	1.06 H	351	35.5	2.5
6	4924.00	27.2 AV	54.0	-26.8	1.06 H	351	24.7	2.5
7	7386.00	44.2 PK	74.0	-29.8	1.28 H	300	36.5	7.7
8	7386.00	32.2 AV	54.0	-21.8	1.28 H	300	24.5	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.8 PK			1.76 V	202	112.2	-2.4
2	*2462.00	98.5 AV			1.76 V	202	100.9	-2.4
3	2483.50	72.4 PK	74.0	-1.6	1.76 V	202	74.8	-2.4
4	2483.50	48.6 AV	54.0	-5.4	1.76 V	202	51.0	-2.4
5	4924.00	41.0 PK	74.0	-33.0	2.17 V	78	38.5	2.5
6	4924.00	29.6 AV	54.0	-24.4	2.17 V	78	27.1	2.5
7	7386.00	47.8 PK	74.0	-26.2	1.86 V	75	40.1	7.7
8	7386.00	35.7 AV	54.0	-18.3	1.86 V	75	28.0	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	1.23 H	120	59.3	-2.0
2	2390.00	44.7 AV	54.0	-9.3	1.23 H	120	46.7	-2.0
3	*2412.00	114.1 PK			1.23 H	120	116.2	-2.1
4	*2412.00	103.1 AV			1.23 H	120	105.2	-2.1
5	4824.00	45.3 PK	74.0	-28.7	1.24 H	344	43.2	2.1
6	4824.00	35.1 AV	54.0	-18.9	1.24 H	344	33.0	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.50 V	115	74.0	-2.0
2	2390.00	46.9 AV	54.0	-7.1	1.50 V	115	48.9	-2.0
3	*2412.00	124.0 PK			1.50 V	115	126.1	-2.1
4	*2412.00	113.5 AV			1.50 V	115	115.6	-2.1
5	4824.00	60.6 PK	74.0	-13.4	3.87 V	157	58.5	2.1
6	4824.00	46.7 AV	54.0	-7.3	3.87 V	157	44.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.20 H	121	62.5	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.20 H	121	46.5	-2.0
3	*2417.00	115.7 PK			1.20 H	121	117.8	-2.1
4	*2417.00	104.0 AV			1.20 H	121	106.1	-2.1
5	4834.00	45.9 PK	74.0	-28.1	1.27 H	354	43.8	2.1
6	4834.00	35.4 AV	54.0	-18.6	1.27 H	354	33.3	2.1
7	7251.00	58.0 PK	74.0	-16.0	1.00 H	341	50.4	7.6
8	7251.00	40.7 AV	54.0	-13.3	1.00 H	341	33.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.83 V	114	73.2	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.83 V	114	48.5	-2.0
3	*2417.00	124.3 PK			1.83 V	114	126.4	-2.1
4	*2417.00	113.8 AV			1.83 V	114	115.9	-2.1
5	4834.00	61.0 PK	74.0	-13.0	3.91 V	135	58.9	2.1
6	4834.00	46.8 AV	54.0	-7.2	3.91 V	135	44.7	2.1
7	7251.00	65.5 PK	74.0	-8.5	2.40 V	101	57.9	7.6
8	7251.00	48.5 AV	54.0	-5.5	2.40 V	101	40.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.40 H	121	73.2	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.40 H	121	46.6	-2.0
3	*2437.00	116.1 PK			1.40 H	121	118.2	-2.1
4	*2437.00	105.5 AV			1.40 H	121	107.6	-2.1
5	2483.50	65.6 PK	74.0	-8.4	1.40 H	121	68.0	-2.4
6	2483.50	44.1 AV	54.0	-9.9	1.40 H	121	46.5	-2.4
7	4874.00	46.2 PK	74.0	-27.8	1.32 H	354	43.8	2.4
8	4874.00	35.5 AV	54.0	-18.5	1.32 H	354	33.1	2.4
9	7311.00	58.0 PK	74.0	-16.0	1.01 H	330	50.6	7.4
10	7311.00	40.4 AV	54.0	-13.6	1.01 H	330	33.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.87 V	115	74.4	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.87 V	115	47.6	-2.0
3	*2437.00	126.3 PK			1.87 V	115	128.4	-2.1
4	*2437.00	115.8 AV			1.87 V	115	117.9	-2.1
5	2483.50	66.5 PK	74.0	-7.5	1.87 V	115	68.9	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.87 V	115	47.2	-2.4
7	4874.00	61.2 PK	74.0	-12.8	3.91 V	145	58.8	2.4
8	4874.00	47.1 AV	54.0	-6.9	3.91 V	145	44.7	2.4
9	7311.00	65.4 PK	74.0	-8.6	2.31 V	101	58.0	7.4
10	7311.00	48.5 AV	54.0	-5.5	2.31 V	101	41.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	113.1 PK			1.31 H	121	115.5	-2.4
2	*2457.00	102.7 AV			1.31 H	121	105.1	-2.4
3	2483.50	61.5 PK	74.0	-12.5	1.31 H	121	63.9	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.31 H	121	46.6	-2.4
5	4914.00	46.0 PK	74.0	-28.0	1.30 H	360	43.5	2.5
6	4914.00	35.3 AV	54.0	-18.7	1.30 H	360	32.8	2.5
7	7371.00	58.3 PK	74.0	-15.7	1.06 H	325	50.7	7.6
8	7371.00	40.6 AV	54.0	-13.4	1.06 H	325	33.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	123.8 PK			1.51 V	113	126.2	-2.4
2	*2457.00	113.6 AV			1.51 V	113	116.0	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.51 V	113	74.0	-2.4
4	2483.50	45.8 AV	54.0	-8.2	1.51 V	113	48.2	-2.4
5	4914.00	61.4 PK	74.0	-12.6	3.92 V	151	58.9	2.5
6	4914.00	47.0 AV	54.0	-7.0	3.92 V	151	44.5	2.5
7	7371.00	65.9 PK	74.0	-8.1	2.36 V	116	58.3	7.6
8	7371.00	48.7 AV	54.0	-5.3	2.36 V	116	41.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.5 PK			1.27 H	121	115.9	-2.4
2	*2462.00	102.5 AV			1.27 H	121	104.9	-2.4
3	2483.50	65.9 PK	74.0	-8.1	1.27 H	121	68.3	-2.4
4	2483.50	44.9 AV	54.0	-9.1	1.27 H	121	47.3	-2.4
5	4924.00	45.7 PK	74.0	-28.3	1.30 H	14	43.2	2.5
6	4924.00	35.3 AV	54.0	-18.7	1.30 H	14	32.8	2.5
7	7386.00	57.8 PK	74.0	-16.2	1.10 H	318	50.1	7.7
8	7386.00	40.1 AV	54.0	-13.9	1.10 H	318	32.4	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	122.8 PK			1.51 V	117	125.2	-2.4
2	*2462.00	113.5 AV			1.51 V	117	115.9	-2.4
3	2483.50	71.0 PK	74.0	-3.0	1.51 V	117	73.4	-2.4
4	2483.50	46.2 AV	54.0	-7.8	1.51 V	117	48.6	-2.4
5	4924.00	60.6 PK	74.0	-13.4	3.87 V	139	58.1	2.5
6	4924.00	46.7 AV	54.0	-7.3	3.87 V	139	44.2	2.5
7	7386.00	65.6 PK	74.0	-8.4	2.30 V	90	57.9	7.7
8	7386.00	48.5 AV	54.0	-5.5	2.30 V	90	40.8	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	112.1 PK			1.32 H	121	114.5	-2.4
2	*2467.00	101.2 AV			1.32 H	121	103.6	-2.4
3	2483.50	61.6 PK	74.0	-12.4	1.32 H	121	64.0	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.32 H	121	46.8	-2.4
5	4934.00	45.7 PK	74.0	-28.3	1.33 H	347	43.3	2.4
6	4934.00	34.9 AV	54.0	-19.1	1.33 H	347	32.5	2.4
7	7401.00	57.9 PK	74.0	-16.1	1.00 H	328	50.0	7.9
8	7401.00	40.3 AV	54.0	-13.7	1.00 H	328	32.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	124.1 PK			1.51 V	116	126.5	-2.4
2	*2467.00	111.4 AV			1.51 V	116	113.8	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.51 V	116	73.9	-2.4
4	2483.50	47.8 AV	54.0	-6.2	1.51 V	116	50.2	-2.4
5	4934.00	60.2 PK	74.0	-13.8	3.82 V	152	57.8	2.4
6	4934.00	46.5 AV	54.0	-7.5	3.82 V	152	44.1	2.4
7	7401.00	65.4 PK	74.0	-8.6	2.28 V	98	57.5	7.9
8	7401.00	48.2 AV	54.0	-5.8	2.28 V	98	40.3	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.7 PK			1.22 H	122	110.1	-2.4
2	*2472.00	97.5 AV			1.22 H	122	99.9	-2.4
3	2483.50	65.8 PK	74.0	-8.2	1.22 H	122	68.2	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.22 H	122	47.2	-2.4
5	4944.00	45.1 PK	74.0	-28.9	1.37 H	2	42.7	2.4
6	4944.00	34.5 AV	54.0	-19.5	1.37 H	2	32.1	2.4
7	7416.00	57.6 PK	74.0	-16.4	1.02 H	324	49.6	8.0
8	7416.00	40.3 AV	54.0	-13.7	1.02 H	324	32.3	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	120.0 PK			1.49 V	29	122.4	-2.4
2	*2472.00	108.1 AV			1.49 V	29	110.5	-2.4
3	2483.50	72.3 PK	74.0	-1.7	1.49 V	29	74.7	-2.4
4	2483.50	49.2 AV	54.0	-4.8	1.49 V	29	51.6	-2.4
5	4944.00	60.5 PK	74.0	-13.5	3.82 V	129	58.1	2.4
6	4944.00	46.4 AV	54.0	-7.6	3.82 V	129	44.0	2.4
7	7416.00	65.1 PK	74.0	-8.9	2.27 V	105	57.1	8.0
8	7416.00	48.2 AV	54.0	-5.8	2.27 V	105	40.2	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.5 PK	74.0	-13.5	1.10 H	121	62.5	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.10 H	121	46.6	-2.0
3	*2412.00	111.6 PK			1.10 H	121	113.7	-2.1
4	*2412.00	100.7 AV			1.10 H	121	102.8	-2.1
5	4824.00	44.0 PK	74.0	-30.0	1.34 H	16	41.9	2.1
6	4824.00	31.4 AV	54.0	-22.6	1.34 H	16	29.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.0 PK	74.0	-4.0	1.48 V	117	72.0	-2.0
2	2390.00	47.2 AV	54.0	-6.8	1.48 V	117	49.2	-2.0
3	*2412.00	122.4 PK			1.48 V	117	124.5	-2.1
4	*2412.00	111.3 AV			1.48 V	117	113.4	-2.1
5	4824.00	47.8 PK	74.0	-26.2	3.96 V	169	45.7	2.1
6	4824.00	37.0 AV	54.0	-17.0	3.96 V	169	34.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	1.50 H	122	70.1	-2.0
2	2390.00	45.0 AV	54.0	-9.0	1.50 H	122	47.0	-2.0
3	*2417.00	112.9 PK			1.50 H	122	115.0	-2.1
4	*2417.00	101.2 AV			1.50 H	122	103.3	-2.1
5	4834.00	44.1 PK	74.0	-29.9	1.30 H	2	42.0	2.1
6	4834.00	31.7 AV	54.0	-22.3	1.30 H	2	29.6	2.1
7	7251.00	53.6 PK	74.0	-20.4	1.17 H	335	46.0	7.6
8	7251.00	38.7 AV	54.0	-15.3	1.17 H	335	31.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	1.50 V	13	72.8	-2.0
2	2390.00	46.2 AV	54.0	-7.8	1.50 V	13	48.2	-2.0
3	*2417.00	121.8 PK			1.50 V	13	123.9	-2.1
4	*2417.00	111.5 AV			1.50 V	13	113.6	-2.1
5	4834.00	48.2 PK	74.0	-25.8	3.95 V	160	46.1	2.1
6	4834.00	37.5 AV	54.0	-16.5	3.95 V	160	35.4	2.1
7	7251.00	57.7 PK	74.0	-16.3	1.86 V	78	50.1	7.6
8	7251.00	43.9 AV	54.0	-10.1	1.86 V	78	36.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.49 H	122	70.2	-2.0
2	2390.00	45.2 AV	54.0	-8.8	1.49 H	122	47.2	-2.0
3	*2437.00	113.6 PK			1.49 H	122	115.7	-2.1
4	*2437.00	101.7 AV			1.49 H	122	103.8	-2.1
5	2483.50	58.3 PK	74.0	-15.7	1.49 H	122	60.7	-2.4
6	2483.50	44.5 AV	54.0	-9.5	1.49 H	122	46.9	-2.4
7	4874.00	44.4 PK	74.0	-29.6	1.32 H	348	42.0	2.4
8	4874.00	32.1 AV	54.0	-21.9	1.32 H	348	29.7	2.4
9	7311.00	53.7 PK	74.0	-20.3	1.18 H	330	46.3	7.4
10	7311.00	38.7 AV	54.0	-15.3	1.18 H	330	31.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.49 V	115	73.5	-2.0
2	2390.00	45.6 AV	54.0	-8.4	1.49 V	115	47.6	-2.0
3	*2437.00	124.5 PK			1.49 V	115	126.6	-2.1
4	*2437.00	113.2 AV			1.49 V	115	115.3	-2.1
5	2483.50	61.6 PK	74.0	-12.4	1.49 V	115	64.0	-2.4
6	2483.50	44.8 AV	54.0	-9.2	1.49 V	115	47.2	-2.4
7	4874.00	48.5 PK	74.0	-25.5	3.99 V	148	46.1	2.4
8	4874.00	38.0 AV	54.0	-16.0	3.99 V	148	35.6	2.4
9	7311.00	57.2 PK	74.0	-16.8	1.86 V	92	49.8	7.4
10	7311.00	43.5 AV	54.0	-10.5	1.86 V	92	36.1	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	110.2 PK			1.38 H	121	112.6	-2.4
2	*2457.00	99.6 AV			1.38 H	121	102.0	-2.4
3	2483.50	60.2 PK	74.0	-13.8	1.38 H	121	62.6	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.38 H	121	46.6	-2.4
5	4914.00	43.7 PK	74.0	-30.3	1.27 H	357	41.2	2.5
6	4914.00	31.3 AV	54.0	-22.7	1.27 H	357	28.8	2.5
7	7371.00	54.1 PK	74.0	-19.9	1.11 H	324	46.5	7.6
8	7371.00	39.1 AV	54.0	-14.9	1.11 H	324	31.5	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	121.6 PK			1.28 V	200	124.0	-2.4
2	*2457.00	110.5 AV			1.28 V	200	112.9	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.28 V	200	74.0	-2.4
4	2483.50	44.2 AV	54.0	-9.8	1.28 V	200	46.6	-2.4
5	4914.00	47.8 PK	74.0	-26.2	3.98 V	155	45.3	2.5
6	4914.00	37.5 AV	54.0	-16.5	3.98 V	155	35.0	2.5
7	7371.00	56.8 PK	74.0	-17.2	1.81 V	97	49.2	7.6
8	7371.00	43.4 AV	54.0	-10.6	1.81 V	97	35.8	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.5 PK			1.35 H	120	111.9	-2.4
2	*2462.00	99.4 AV			1.35 H	120	101.8	-2.4
3	2483.50	66.5 PK	74.0	-7.5	1.35 H	120	68.9	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.35 H	120	46.9	-2.4
5	4924.00	43.3 PK	74.0	-30.7	1.27 H	4	40.8	2.5
6	4924.00	31.2 AV	54.0	-22.8	1.27 H	4	28.7	2.5
7	7386.00	53.8 PK	74.0	-20.2	1.06 H	324	46.1	7.7
8	7386.00	38.7 AV	54.0	-15.3	1.06 H	324	31.0	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	121.0 PK			1.30 V	202	123.4	-2.4
2	*2462.00	110.1 AV			1.30 V	202	112.5	-2.4
3	2483.50	71.4 PK	74.0	-2.6	1.30 V	202	73.8	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.30 V	202	47.0	-2.4
5	4924.00	47.8 PK	74.0	-26.2	3.99 V	142	45.3	2.5
6	4924.00	37.7 AV	54.0	-16.3	3.99 V	142	35.2	2.5
7	7386.00	56.8 PK	74.0	-17.2	1.79 V	87	49.1	7.7
8	7386.00	43.2 AV	54.0	-10.8	1.79 V	87	35.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	110.5 PK			1.32 H	120	112.9	-2.4
2	*2467.00	99.0 AV			1.32 H	120	101.4	-2.4
3	2483.50	58.0 PK	74.0	-16.0	1.32 H	120	60.4	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.32 H	120	46.9	-2.4
5	4934.00	43.5 PK	74.0	-30.5	1.25 H	1	41.1	2.4
6	4934.00	31.2 AV	54.0	-22.8	1.25 H	1	28.8	2.4
7	7401.00	53.5 PK	74.0	-20.5	1.10 H	335	45.6	7.9
8	7401.00	38.6 AV	54.0	-15.4	1.10 H	335	30.7	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	121.7 PK			1.20 V	28	124.1	-2.4
2	*2467.00	109.4 AV			1.20 V	28	111.8	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.20 V	28	74.0	-2.4
4	2483.50	46.6 AV	54.0	-7.4	1.20 V	28	49.0	-2.4
5	4934.00	48.0 PK	74.0	-26.0	3.95 V	137	45.6	2.4
6	4934.00	37.7 AV	54.0	-16.3	3.95 V	137	35.3	2.4
7	7401.00	56.9 PK	74.0	-17.1	1.78 V	89	49.0	7.9
8	7401.00	43.4 AV	54.0	-10.6	1.78 V	89	35.5	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.8 PK			1.14 H	119	109.2	-2.4
2	*2472.00	96.4 AV			1.14 H	119	98.8	-2.4
3	2483.50	57.5 PK	74.0	-16.5	1.14 H	119	59.9	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.14 H	119	48.0	-2.4
5	4944.00	43.7 PK	74.0	-30.3	1.22 H	348	41.3	2.4
6	4944.00	31.2 AV	54.0	-22.8	1.22 H	348	28.8	2.4
7	7416.00	53.0 PK	74.0	-21.0	1.09 H	338	45.0	8.0
8	7416.00	38.2 AV	54.0	-15.8	1.09 H	338	30.2	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	117.2 PK			1.50 V	147	119.6	-2.4
2	*2472.00	106.8 AV			1.50 V	147	109.2	-2.4
3	2483.50	71.0 PK	74.0	-3.0	1.50 V	147	73.4	-2.4
4	2483.50	50.4 AV	54.0	-3.6	1.50 V	147	52.8	-2.4
5	4944.00	47.4 PK	74.0	-26.6	3.95 V	147	45.0	2.4
6	4944.00	37.4 AV	54.0	-16.6	3.95 V	147	35.0	2.4
7	7416.00	56.1 PK	74.0	-17.9	1.80 V	101	48.1	8.0
8	7416.00	42.7 AV	54.0	-11.3	1.80 V	101	34.7	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.2 PK	74.0	-17.8	1.17 H	120	58.2	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.17 H	120	46.5	-2.0
3	*2412.00	109.2 PK			1.17 H	120	111.3	-2.1
4	*2412.00	97.2 AV			1.17 H	120	99.3	-2.1
5	4824.00	42.9 PK	74.0	-31.1	1.30 H	3	40.8	2.1
6	4824.00	30.6 AV	54.0	-23.4	1.30 H	3	28.5	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.2 PK	74.0	-2.8	1.41 V	115	73.2	-2.0
2	2390.00	47.0 AV	54.0	-7.0	1.41 V	115	49.0	-2.0
3	*2412.00	119.8 PK			1.41 V	115	121.9	-2.1
4	*2412.00	106.5 AV			1.41 V	115	108.6	-2.1
5	4824.00	47.3 PK	74.0	-26.7	1.86 V	73	45.2	2.1
6	4824.00	35.7 AV	54.0	-18.3	1.86 V	73	33.6	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.2 PK	74.0	-13.8	1.05 H	121	62.2	-2.0
2	2390.00	44.4 AV	54.0	-9.6	1.05 H	121	46.4	-2.0
3	*2417.00	109.8 PK			1.05 H	121	111.9	-2.1
4	*2417.00	98.4 AV			1.05 H	121	100.5	-2.1
5	4834.00	42.5 PK	74.0	-31.5	1.33 H	356	40.4	2.1
6	4834.00	30.5 AV	54.0	-23.5	1.33 H	356	28.4	2.1
7	7251.00	49.5 PK	74.0	-24.5	3.79 H	316	41.9	7.6
8	7251.00	36.9 AV	54.0	-17.1	3.79 H	316	29.3	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.80 V	115	74.4	-2.0
2	2390.00	46.5 AV	54.0	-7.5	1.80 V	115	48.5	-2.0
3	*2417.00	120.4 PK			1.80 V	115	122.5	-2.1
4	*2417.00	108.5 AV			1.80 V	115	110.6	-2.1
5	4834.00	47.0 PK	74.0	-27.0	1.86 V	79	44.9	2.1
6	4834.00	35.4 AV	54.0	-18.6	1.86 V	79	33.3	2.1
7	7251.00	55.3 PK	74.0	-18.7	1.72 V	76	47.7	7.6
8	7251.00	41.9 AV	54.0	-12.1	1.72 V	76	34.3	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.0 PK	74.0	-17.0	1.28 H	120	59.0	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.28 H	120	46.5	-2.0
3	*2437.00	110.8 PK			1.28 H	120	112.9	-2.1
4	*2437.00	99.0 AV			1.28 H	120	101.1	-2.1
5	2483.50	56.6 PK	74.0	-17.4	1.28 H	120	59.0	-2.4
6	2483.50	44.3 AV	54.0	-9.7	1.28 H	120	46.7	-2.4
7	4874.00	42.8 PK	74.0	-31.2	1.38 H	349	40.4	2.4
8	4874.00	30.9 AV	54.0	-23.1	1.38 H	349	28.5	2.4
9	7311.00	48.9 PK	74.0	-25.1	3.80 H	327	41.5	7.4
10	7311.00	36.4 AV	54.0	-17.6	3.80 H	327	29.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.50 V	114	74.4	-2.0
2	2390.00	45.3 AV	54.0	-8.7	1.50 V	114	47.3	-2.0
3	*2437.00	121.0 PK			1.50 V	114	123.1	-2.1
4	*2437.00	109.5 AV			1.50 V	114	111.6	-2.1
5	2483.50	61.2 PK	74.0	-12.8	1.50 V	114	63.6	-2.4
6	2483.50	44.6 AV	54.0	-9.4	1.50 V	114	47.0	-2.4
7	4874.00	47.3 PK	74.0	-26.7	1.85 V	94	44.9	2.4
8	4874.00	35.8 AV	54.0	-18.2	1.85 V	94	33.4	2.4
9	7311.00	55.4 PK	74.0	-18.6	1.76 V	91	48.0	7.4
10	7311.00	41.8 AV	54.0	-12.2	1.76 V	91	34.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.4 PK			1.06 H	119	109.8	-2.4
2	*2457.00	97.5 AV			1.06 H	119	99.9	-2.4
3	2483.50	59.5 PK	74.0	-14.5	1.06 H	119	61.9	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.06 H	119	46.8	-2.4
5	4914.00	42.9 PK	74.0	-31.1	1.40 H	350	40.4	2.5
6	4914.00	30.8 AV	54.0	-23.2	1.40 H	350	28.3	2.5
7	7371.00	49.3 PK	74.0	-24.7	3.85 H	333	41.7	7.6
8	7371.00	36.7 AV	54.0	-17.3	3.85 H	333	29.1	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	119.9 PK			1.49 V	30	122.3	-2.4
2	*2457.00	107.9 AV			1.49 V	30	110.3	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.49 V	30	74.6	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.49 V	30	46.9	-2.4
5	4914.00	47.0 PK	74.0	-27.0	1.81 V	78	44.5	2.5
6	4914.00	35.4 AV	54.0	-18.6	1.81 V	78	32.9	2.5
7	7371.00	55.4 PK	74.0	-18.6	1.76 V	88	47.8	7.6
8	7371.00	41.7 AV	54.0	-12.3	1.76 V	88	34.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.1 PK			1.28 H	122	110.5	-2.4
2	*2462.00	97.0 AV			1.28 H	122	99.4	-2.4
3	2483.50	66.6 PK	74.0	-7.4	1.28 H	122	69.0	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.28 H	122	46.8	-2.4
5	4924.00	42.5 PK	74.0	-31.5	1.44 H	1	40.0	2.5
6	4924.00	30.6 AV	54.0	-23.4	1.44 H	1	28.1	2.5
7	7386.00	49.5 PK	74.0	-24.5	3.90 H	337	41.8	7.7
8	7386.00	36.8 AV	54.0	-17.2	3.90 H	337	29.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.0 PK			1.77 V	33	121.4	-2.4
2	*2462.00	107.8 AV			1.77 V	33	110.2	-2.4
3	2483.50	71.3 PK	74.0	-2.7	1.77 V	33	73.7	-2.4
4	2483.50	46.6 AV	54.0	-7.4	1.77 V	33	49.0	-2.4
5	4924.00	47.1 PK	74.0	-26.9	1.79 V	71	44.6	2.5
6	4924.00	35.3 AV	54.0	-18.7	1.79 V	71	32.8	2.5
7	7386.00	55.7 PK	74.0	-18.3	1.78 V	89	48.0	7.7
8	7386.00	42.1 AV	54.0	-11.9	1.78 V	89	34.4	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.5 PK			1.30 H	121	108.9	-2.4
2	*2467.00	94.7 AV			1.30 H	121	97.1	-2.4
3	2483.50	57.1 PK	74.0	-16.9	1.30 H	121	59.5	-2.4
4	2483.50	44.5 AV	54.0	-9.5	1.30 H	121	46.9	-2.4
5	4934.00	42.7 PK	74.0	-31.3	1.45 H	2	40.3	2.4
6	4934.00	30.8 AV	54.0	-23.2	1.45 H	2	28.4	2.4
7	7401.00	50.3 PK	74.0	-23.7	3.92 H	331	42.4	7.9
8	7401.00	37.3 AV	54.0	-16.7	3.92 H	331	29.4	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.5 PK			1.60 V	115	120.9	-2.4
2	*2467.00	105.6 AV			1.60 V	115	108.0	-2.4
3	2483.50	71.6 PK	74.0	-2.4	1.60 V	115	74.0	-2.4
4	2483.50	46.7 AV	54.0	-7.3	1.60 V	115	49.1	-2.4
5	4934.00	47.0 PK	74.0	-27.0	1.78 V	65	44.6	2.4
6	4934.00	35.5 AV	54.0	-18.5	1.78 V	65	33.1	2.4
7	7401.00	55.4 PK	74.0	-18.6	1.84 V	74	47.5	7.9
8	7401.00	41.8 AV	54.0	-12.2	1.84 V	74	33.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.1 PK			1.34 H	120	107.5	-2.4
2	*2472.00	93.5 AV			1.34 H	120	95.9	-2.4
3	2483.50	60.1 PK	74.0	-13.9	1.34 H	120	62.5	-2.4
4	2483.50	45.7 AV	54.0	-8.3	1.34 H	120	48.1	-2.4
5	4944.00	42.7 PK	74.0	-31.3	1.46 H	10	40.3	2.4
6	4944.00	31.1 AV	54.0	-22.9	1.46 H	10	28.7	2.4
7	7416.00	51.0 PK	74.0	-23.0	3.88 H	345	43.0	8.0
8	7416.00	37.8 AV	54.0	-16.2	3.88 H	345	29.8	8.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	116.0 PK			1.51 V	151	118.4	-2.4
2	*2472.00	104.5 AV			1.51 V	151	106.9	-2.4
3	2483.50	70.6 PK	74.0	-3.4	1.51 V	151	73.0	-2.4
4	2483.50	51.2 AV	54.0	-2.8	1.51 V	151	53.6	-2.4
5	4944.00	47.2 PK	74.0	-26.8	1.76 V	62	44.8	2.4
6	4944.00	35.6 AV	54.0	-18.4	1.76 V	62	33.2	2.4
7	7416.00	56.0 PK	74.0	-18.0	1.86 V	59	48.0	8.0
8	7416.00	42.3 AV	54.0	-11.7	1.86 V	59	34.3	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.1 PK	74.0	-11.9	1.18 H	121	64.1	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.18 H	121	46.6	-2.0
3	*2412.00	109.3 PK			1.18 H	121	111.4	-2.1
4	*2412.00	98.7 AV			1.18 H	121	100.8	-2.1
5	4824.00	40.4 PK	74.0	-33.6	1.27 H	289	38.3	2.1
6	4824.00	29.2 AV	54.0	-24.8	1.27 H	289	27.1	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.50 V	120	74.3	-2.0
2	2390.00	46.7 AV	54.0	-7.3	1.50 V	120	48.7	-2.0
3	*2412.00	120.6 PK			1.50 V	120	122.7	-2.1
4	*2412.00	109.8 AV			1.50 V	120	111.9	-2.1
5	4824.00	54.7 PK	74.0	-19.3	3.96 V	139	52.6	2.1
6	4824.00	40.9 AV	54.0	-13.1	3.96 V	139	38.8	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.3 PK	74.0	-10.7	1.11 H	122	65.3	-2.0
2	2390.00	44.5 AV	54.0	-9.5	1.11 H	122	46.5	-2.0
3	*2417.00	110.7 PK			1.11 H	122	112.8	-2.1
4	*2417.00	99.8 AV			1.11 H	122	101.9	-2.1
5	4834.00	41.0 PK	74.0	-33.0	1.23 H	286	38.9	2.1
6	4834.00	29.7 AV	54.0	-24.3	1.23 H	286	27.6	2.1
7	7251.00	47.6 PK	74.0	-26.4	1.19 H	168	40.0	7.6
8	7251.00	34.5 AV	54.0	-19.5	1.19 H	168	26.9	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.51 V	121	73.6	-2.0
2	2390.00	46.7 AV	54.0	-7.3	1.51 V	121	48.7	-2.0
3	*2417.00	121.4 PK			1.51 V	121	123.5	-2.1
4	*2417.00	110.3 AV			1.51 V	121	112.4	-2.1
5	4834.00	55.2 PK	74.0	-18.8	3.90 V	140	53.1	2.1
6	4834.00	41.4 AV	54.0	-12.6	3.90 V	140	39.3	2.1
7	7251.00	61.0 PK	74.0	-13.0	2.22 V	121	53.4	7.6
8	7251.00	46.5 AV	54.0	-7.5	2.22 V	121	38.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.3 PK	74.0	-9.7	1.32 H	122	66.3	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.32 H	122	46.6	-2.0
3	*2437.00	111.6 PK			1.32 H	122	113.7	-2.1
4	*2437.00	101.3 AV			1.32 H	122	103.4	-2.1
5	2483.50	57.2 PK	74.0	-16.8	1.32 H	122	59.6	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.32 H	122	46.6	-2.4
7	4874.00	41.3 PK	74.0	-32.7	1.21 H	288	38.9	2.4
8	4874.00	30.0 AV	54.0	-24.0	1.21 H	288	27.6	2.4
9	7311.00	47.6 PK	74.0	-26.4	1.25 H	181	40.2	7.4
10	7311.00	34.7 AV	54.0	-19.3	1.25 H	181	27.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.71 V	124	74.3	-2.0
2	2390.00	46.1 AV	54.0	-7.9	1.71 V	124	48.1	-2.0
3	*2437.00	123.6 PK			1.71 V	124	125.7	-2.1
4	*2437.00	111.2 AV			1.71 V	124	113.3	-2.1
5	2483.50	61.3 PK	74.0	-12.7	1.71 V	124	63.7	-2.4
6	2483.50	45.1 AV	54.0	-8.9	1.71 V	124	47.5	-2.4
7	4874.00	55.7 PK	74.0	-18.3	3.91 V	140	53.3	2.4
8	4874.00	41.8 AV	54.0	-12.2	3.91 V	140	39.4	2.4
9	7311.00	61.0 PK	74.0	-13.0	2.22 V	118	53.6	7.4
10	7311.00	46.6 AV	54.0	-7.4	2.22 V	118	39.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	107.3 PK			1.28 H	118	109.7	-2.4
2	*2457.00	96.9 AV			1.28 H	118	99.3	-2.4
3	2483.50	61.0 PK	74.0	-13.0	1.28 H	118	63.4	-2.4
4	2483.50	44.3 AV	54.0	-9.7	1.28 H	118	46.7	-2.4
5	4914.00	41.1 PK	74.0	-32.9	1.27 H	271	38.6	2.5
6	4914.00	29.8 AV	54.0	-24.2	1.27 H	271	27.3	2.5
7	7371.00	47.3 PK	74.0	-26.7	1.13 H	169	39.7	7.6
8	7371.00	34.2 AV	54.0	-19.8	1.13 H	169	26.6	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	119.9 PK			1.23 V	199	122.3	-2.4
2	*2457.00	108.5 AV			1.23 V	199	110.9	-2.4
3	2483.50	71.2 PK	74.0	-2.8	1.23 V	199	73.6	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.23 V	199	48.0	-2.4
5	4914.00	55.1 PK	74.0	-18.9	3.84 V	154	52.6	2.5
6	4914.00	41.5 AV	54.0	-12.5	3.84 V	154	39.0	2.5
7	7371.00	60.8 PK	74.0	-13.2	2.20 V	131	53.2	7.6
8	7371.00	46.1 AV	54.0	-7.9	2.20 V	131	38.5	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.5 PK			1.30 H	118	109.9	-2.4
2	*2462.00	97.2 AV			1.30 H	118	99.6	-2.4
3	2483.50	60.1 PK	74.0	-13.9	1.30 H	118	62.5	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.30 H	118	46.8	-2.4
5	4924.00	40.8 PK	74.0	-33.2	1.20 H	274	38.3	2.5
6	4924.00	29.6 AV	54.0	-24.4	1.20 H	274	27.1	2.5
7	7386.00	46.6 PK	74.0	-27.4	1.16 H	157	38.9	7.7
8	7386.00	33.8 AV	54.0	-20.2	1.16 H	157	26.1	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.4 PK			1.22 V	208	122.8	-2.4
2	*2462.00	108.8 AV			1.22 V	208	111.2	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.22 V	208	74.6	-2.4
4	2483.50	46.5 AV	54.0	-7.5	1.22 V	208	48.9	-2.4
5	4924.00	54.7 PK	74.0	-19.3	3.86 V	161	52.2	2.5
6	4924.00	41.3 AV	54.0	-12.7	3.86 V	161	38.8	2.5
7	7386.00	60.7 PK	74.0	-13.3	2.21 V	121	53.0	7.7
8	7386.00	46.2 AV	54.0	-7.8	2.21 V	121	38.5	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.0 PK			1.30 H	118	109.4	-2.4
2	*2467.00	96.7 AV			1.30 H	118	99.1	-2.4
3	2483.50	62.6 PK	74.0	-11.4	1.30 H	118	65.0	-2.4
4	2483.50	45.2 AV	54.0	-8.8	1.30 H	118	47.6	-2.4
5	4934.00	40.8 PK	74.0	-33.2	1.22 H	271	38.4	2.4
6	4934.00	29.7 AV	54.0	-24.3	1.22 H	271	27.3	2.4
7	7401.00	46.6 PK	74.0	-27.4	1.20 H	165	38.7	7.9
8	7401.00	34.0 AV	54.0	-20.0	1.20 H	165	26.1	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	120.5 PK			1.19 V	209	122.9	-2.4
2	*2467.00	108.1 AV			1.19 V	209	110.5	-2.4
3	2483.50	72.2 PK	74.0	-1.8	1.19 V	209	74.6	-2.4
4	2483.50	47.7 AV	54.0	-6.3	1.19 V	209	50.1	-2.4
5	4934.00	54.9 PK	74.0	-19.1	3.90 V	170	52.5	2.4
6	4934.00	41.3 AV	54.0	-12.7	3.90 V	170	38.9	2.4
7	7401.00	60.9 PK	74.0	-13.1	2.19 V	136	53.0	7.9
8	7401.00	46.1 AV	54.0	-7.9	2.19 V	136	38.2	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.9 PK			1.32 H	117	108.3	-2.4
2	*2472.00	95.6 AV			1.32 H	117	98.0	-2.4
3	2483.50	59.2 PK	74.0	-14.8	1.32 H	117	61.6	-2.4
4	2483.50	45.6 AV	54.0	-8.4	1.32 H	117	48.0	-2.4
5	4944.00	41.0 PK	74.0	-33.0	1.18 H	262	38.6	2.4
6	4944.00	29.9 AV	54.0	-24.1	1.18 H	262	27.5	2.4
7	7416.00	46.4 PK	74.0	-27.6	1.25 H	175	38.4	8.0
8	7416.00	33.7 AV	54.0	-20.3	1.25 H	175	25.7	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	118.4 PK			1.24 V	151	120.8	-2.4
2	*2472.00	107.1 AV			1.24 V	151	109.5	-2.4
3	2483.50	71.7 PK	74.0	-2.3	1.24 V	151	74.1	-2.4
4	2483.50	52.0 AV	54.0	-2.0	1.24 V	151	54.4	-2.4
5	4944.00	54.4 PK	74.0	-19.6	3.92 V	154	52.0	2.4
6	4944.00	41.1 AV	54.0	-12.9	3.92 V	154	38.7	2.4
7	7416.00	60.8 PK	74.0	-13.2	2.15 V	136	52.8	8.0
8	7416.00	45.7 AV	54.0	-8.3	2.15 V	136	37.7	8.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 1 : 2412 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.4 PK	74.0	-16.6	1.18 H	121	59.4	-2.0
2	2390.00	44.8 AV	54.0	-9.2	1.18 H	121	46.8	-2.0
3	*2412.00	107.3 PK			1.18 H	121	109.4	-2.1
4	*2412.00	96.2 AV			1.18 H	121	98.3	-2.1
5	4824.00	41.2 PK	74.0	-32.8	1.05 H	306	39.1	2.1
6	4824.00	30.4 AV	54.0	-23.6	1.05 H	306	28.3	2.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.0 PK	74.0	-2.0	1.38 V	114	74.0	-2.0
2	2390.00	49.5 AV	54.0	-4.5	1.38 V	114	51.5	-2.0
3	*2412.00	117.8 PK			1.38 V	114	119.9	-2.1
4	*2412.00	106.3 AV			1.38 V	114	108.4	-2.1
5	4824.00	49.9 PK	74.0	-24.1	1.46 V	140	47.8	2.1
6	4824.00	38.0 AV	54.0	-16.0	1.46 V	140	35.9	2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 2 : 2417 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.5 PK	74.0	-5.5	1.19 H	121	70.5	-2.0
2	2390.00	44.8 AV	54.0	-9.2	1.19 H	121	46.8	-2.0
3	*2417.00	109.1 PK			1.19 H	121	111.2	-2.1
4	*2417.00	97.3 AV			1.19 H	121	99.4	-2.1
5	4834.00	41.8 PK	74.0	-32.2	1.00 H	332	39.7	2.1
6	4834.00	31.0 AV	54.0	-23.0	1.00 H	332	28.9	2.1
7	7251.00	47.8 PK	74.0	-26.2	2.99 H	329	40.2	7.6
8	7251.00	36.4 AV	54.0	-17.6	2.99 H	329	28.8	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.3 PK	74.0	-1.7	1.36 V	114	74.3	-2.0
2	2390.00	47.2 AV	54.0	-6.8	1.36 V	114	49.2	-2.0
3	*2417.00	120.6 PK			1.36 V	114	122.7	-2.1
4	*2417.00	108.1 AV			1.36 V	114	110.2	-2.1
5	4834.00	50.3 PK	74.0	-23.7	1.47 V	116	48.2	2.1
6	4834.00	38.1 AV	54.0	-15.9	1.47 V	116	36.0	2.1
7	7251.00	56.2 PK	74.0	-17.8	1.54 V	125	48.6	7.6
8	7251.00	41.7 AV	54.0	-12.3	1.54 V	125	34.1	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.3 PK	74.0	-14.7	1.30 H	120	61.3	-2.0
2	2390.00	44.6 AV	54.0	-9.4	1.30 H	120	46.6	-2.0
3	*2437.00	111.4 PK			1.30 H	120	113.5	-2.1
4	*2437.00	99.3 AV			1.30 H	120	101.4	-2.1
5	2483.50	56.8 PK	74.0	-17.2	1.30 H	120	59.2	-2.4
6	2483.50	44.2 AV	54.0	-9.8	1.30 H	120	46.6	-2.4
7	4874.00	42.1 PK	74.0	-31.9	1.01 H	318	39.7	2.4
8	4874.00	31.3 AV	54.0	-22.7	1.01 H	318	28.9	2.4
9	7311.00	47.5 PK	74.0	-26.5	3.02 H	340	40.1	7.4
10	7311.00	36.1 AV	54.0	-17.9	3.02 H	340	28.7	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.54 V	115	73.0	-2.0
2	2390.00	45.7 AV	54.0	-8.3	1.54 V	115	47.7	-2.0
3	*2437.00	121.5 PK			1.54 V	115	123.6	-2.1
4	*2437.00	109.4 AV			1.54 V	115	111.5	-2.1
5	2483.50	63.0 PK	74.0	-11.0	1.54 V	115	65.4	-2.4
6	2483.50	44.7 AV	54.0	-9.3	1.54 V	115	47.1	-2.4
7	4874.00	50.4 PK	74.0	-23.6	1.50 V	131	48.0	2.4
8	4874.00	38.5 AV	54.0	-15.5	1.50 V	131	36.1	2.4
9	7311.00	56.4 PK	74.0	-17.6	1.48 V	111	49.0	7.4
10	7311.00	42.0 AV	54.0	-12.0	1.48 V	111	34.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 10 : 2457 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.1 PK			1.10 H	119	110.5	-2.4
2	*2457.00	97.1 AV			1.10 H	119	99.5	-2.4
3	2483.50	69.5 PK	74.0	-4.5	1.10 H	119	71.9	-2.4
4	2483.50	44.8 AV	54.0	-9.2	1.10 H	119	47.2	-2.4
5	4914.00	41.3 PK	74.0	-32.7	1.06 H	320	38.8	2.5
6	4914.00	30.7 AV	54.0	-23.3	1.06 H	320	28.2	2.5
7	7371.00	48.2 PK	74.0	-25.8	2.97 H	326	40.6	7.6
8	7371.00	36.6 AV	54.0	-17.4	2.97 H	326	29.0	7.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	119.0 PK			1.74 V	30	121.4	-2.4
2	*2457.00	108.5 AV			1.74 V	30	110.9	-2.4
3	2483.50	71.9 PK	74.0	-2.1	1.74 V	30	74.3	-2.4
4	2483.50	44.4 AV	54.0	-9.6	1.74 V	30	46.8	-2.4
5	4914.00	50.1 PK	74.0	-23.9	1.43 V	109	47.6	2.5
6	4914.00	37.7 AV	54.0	-16.3	1.43 V	109	35.2	2.5
7	7371.00	55.9 PK	74.0	-18.1	1.52 V	139	48.3	7.6
8	7371.00	41.5 AV	54.0	-12.5	1.52 V	139	33.9	7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 11 : 2462 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.2 PK			1.31 H	121	108.6	-2.4
2	*2462.00	95.5 AV			1.31 H	121	97.9	-2.4
3	2483.50	60.5 PK	74.0	-13.5	1.31 H	121	62.9	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.31 H	121	47.0	-2.4
5	4924.00	41.1 PK	74.0	-32.9	1.03 H	334	38.6	2.5
6	4924.00	30.5 AV	54.0	-23.5	1.03 H	334	28.0	2.5
7	7386.00	47.8 PK	74.0	-26.2	3.03 H	334	40.1	7.7
8	7386.00	36.3 AV	54.0	-17.7	3.03 H	334	28.6	7.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	118.9 PK			1.22 V	201	121.3	-2.4
2	*2462.00	106.8 AV			1.22 V	201	109.2	-2.4
3	2483.50	72.0 PK	74.0	-2.0	1.22 V	201	74.4	-2.4
4	2483.50	48.0 AV	54.0	-6.0	1.22 V	201	50.4	-2.4
5	4924.00	50.4 PK	74.0	-23.6	1.40 V	124	47.9	2.5
6	4924.00	37.9 AV	54.0	-16.1	1.40 V	124	35.4	2.5
7	7386.00	55.4 PK	74.0	-18.6	1.54 V	150	47.7	7.7
8	7386.00	41.1 AV	54.0	-12.9	1.54 V	150	33.4	7.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 12 : 2467 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.6 PK			1.31 H	122	107.0	-2.4
2	*2467.00	94.8 AV			1.31 H	122	97.2	-2.4
3	2483.50	59.1 PK	74.0	-14.9	1.31 H	122	61.5	-2.4
4	2483.50	44.6 AV	54.0	-9.4	1.31 H	122	47.0	-2.4
5	4934.00	40.9 PK	74.0	-33.1	1.07 H	342	38.5	2.4
6	4934.00	30.5 AV	54.0	-23.5	1.07 H	342	28.1	2.4
7	7401.00	48.3 PK	74.0	-25.7	2.98 H	341	40.4	7.9
8	7401.00	36.7 AV	54.0	-17.3	2.98 H	341	28.8	7.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.6 PK			1.05 V	210	120.0	-2.4
2	*2467.00	105.6 AV			1.05 V	210	108.0	-2.4
3	2483.50	70.0 PK	74.0	-4.0	1.05 V	210	72.4	-2.4
4	2483.50	51.8 AV	54.0	-2.2	1.05 V	210	54.2	-2.4
5	4934.00	50.1 PK	74.0	-23.9	1.45 V	136	47.7	2.4
6	4934.00	37.8 AV	54.0	-16.2	1.45 V	136	35.4	2.4
7	7401.00	54.9 PK	74.0	-19.1	1.59 V	139	47.0	7.9
8	7401.00	40.8 AV	54.0	-13.2	1.59 V	139	32.9	7.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 13 : 2472 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	21 °C, 72% RH
Tested By	Vanness Huang		


Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	105.4 PK			1.30 H	121	107.8	-2.4
2	*2472.00	93.1 AV			1.30 H	121	95.5	-2.4
3	2483.50	58.9 PK	74.0	-15.1	1.30 H	121	61.3	-2.4
4	2483.50	45.4 AV	54.0	-8.6	1.30 H	121	47.8	-2.4
5	4944.00	40.7 PK	74.0	-33.3	1.05 H	326	38.3	2.4
6	4944.00	30.1 AV	54.0	-23.9	1.05 H	326	27.7	2.4
7	7416.00	48.3 PK	74.0	-25.7	3.05 H	348	40.3	8.0
8	7416.00	36.5 AV	54.0	-17.5	3.05 H	348	28.5	8.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.9 PK			1.00 V	211	117.3	-2.4
2	*2472.00	104.9 AV			1.00 V	211	107.3	-2.4
3	2483.50	71.5 PK	74.0	-2.5	1.16 V	221	73.9	-2.4
4	2483.50	52.4 AV	54.0	-1.6	1.16 V	221	54.8	-2.4
5	4944.00	49.6 PK	74.0	-24.4	1.43 V	112	47.2	2.4
6	4944.00	37.4 AV	54.0	-16.6	1.43 V	112	35.0	2.4
7	7416.00	55.2 PK	74.0	-18.8	1.49 V	147	47.2	8.0
8	7416.00	40.6 AV	54.0	-13.4	1.49 V	147	32.6	8.0

Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

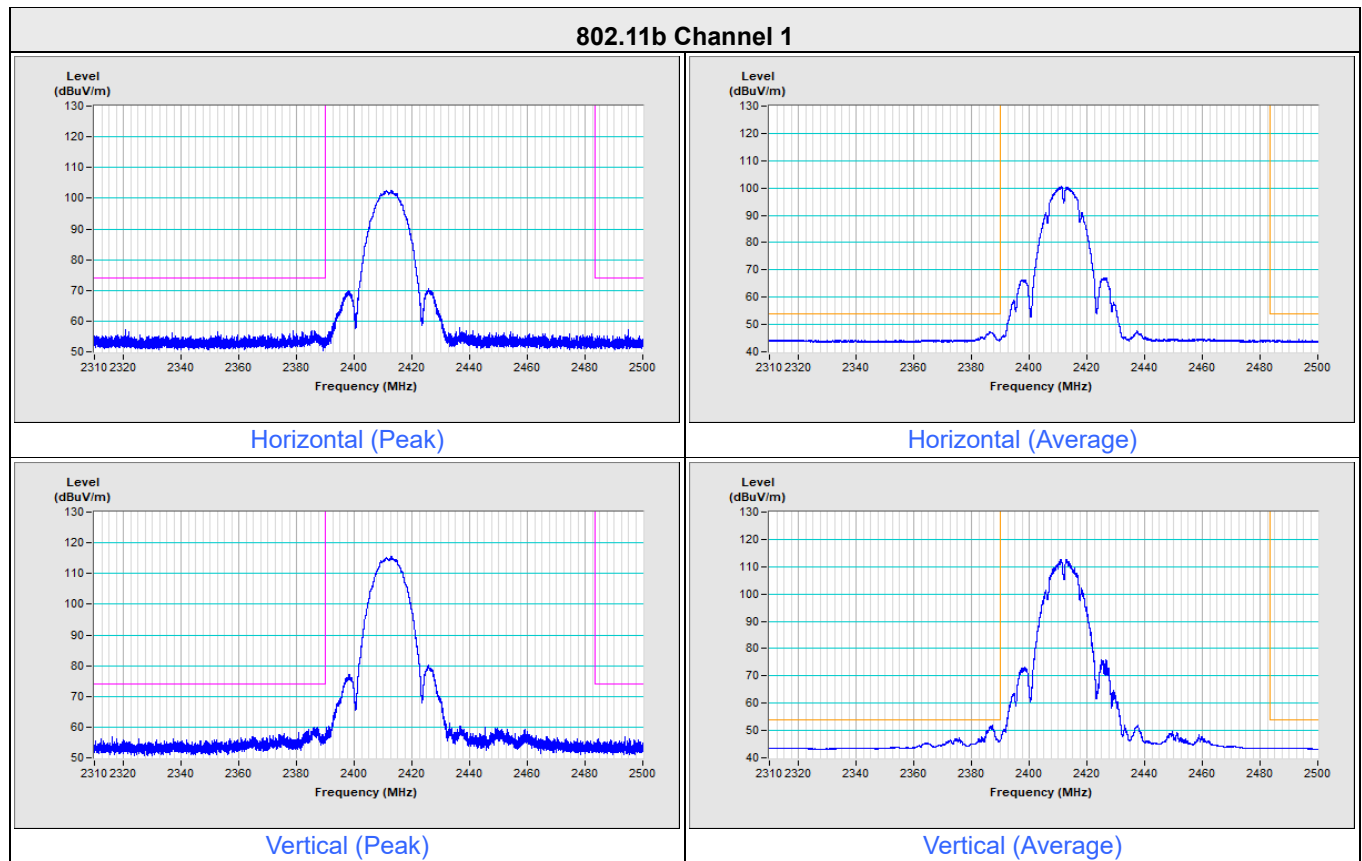


802.11b Channel 2

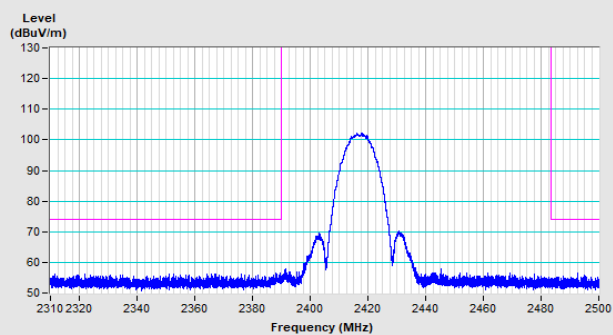


Horizontal (Peak)

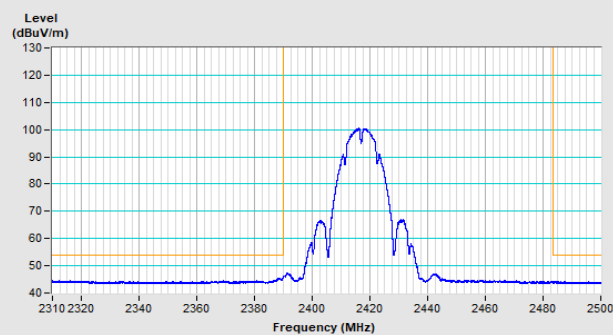

Horizontal (Average)

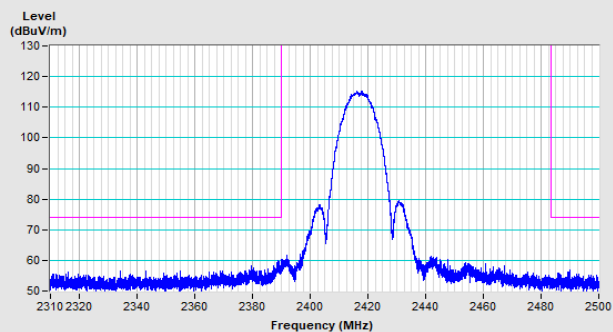


Vertical (Peak)

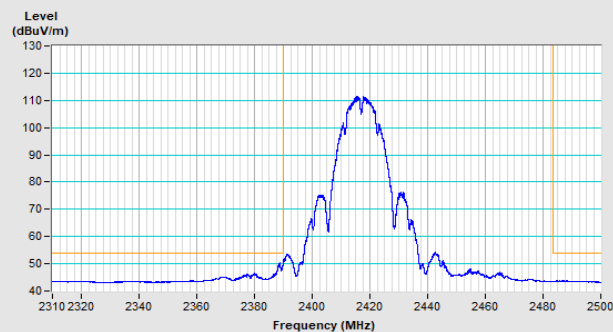


Vertical (Average)


802.11b Channel 10

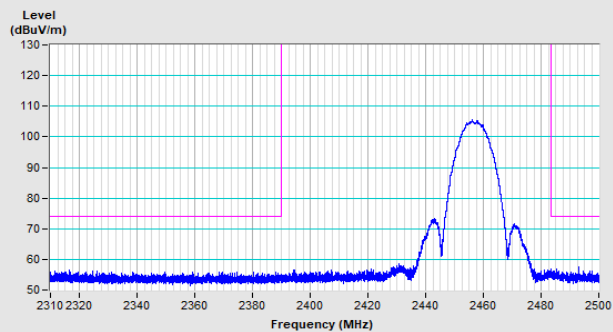


Horizontal (Peak)

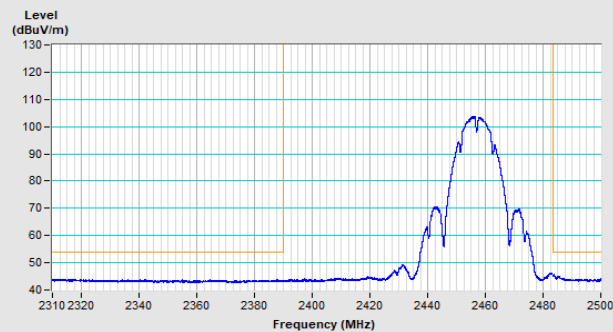

Horizontal (Average)

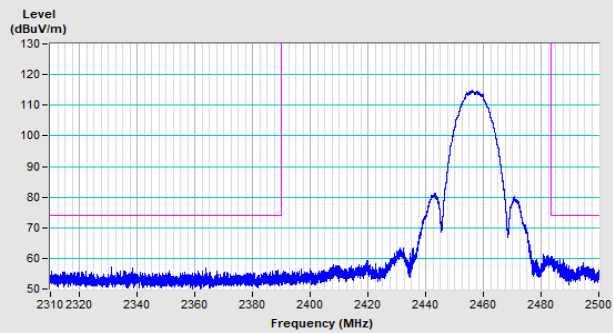


Vertical (Peak)

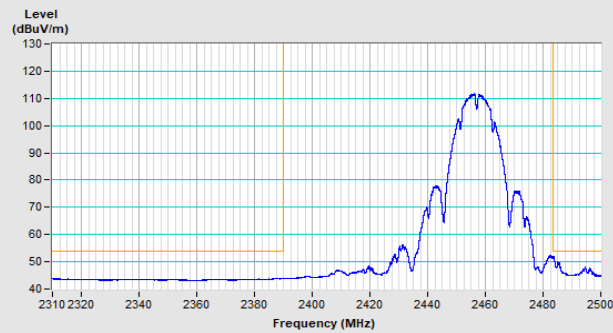


Vertical (Average)


802.11b Channel 11

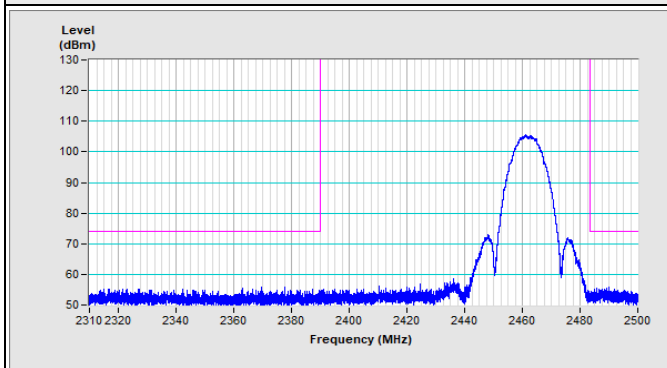


Horizontal (Peak)

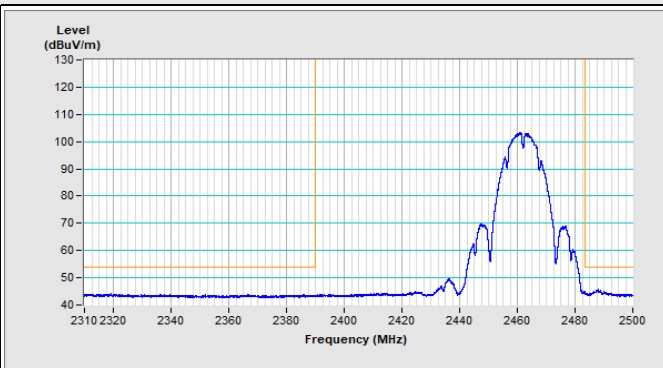

Horizontal (Average)

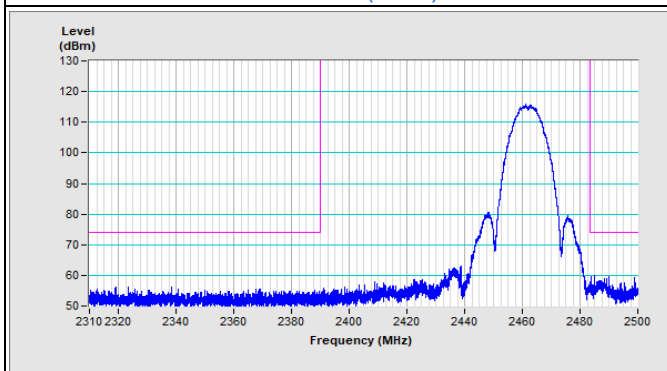


Vertical (Peak)

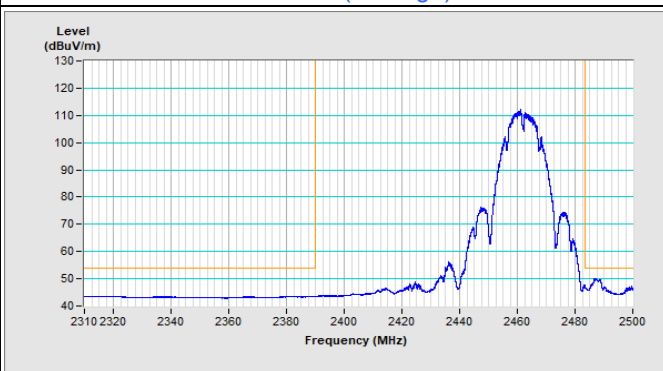


Vertical (Average)


802.11b Channel 12

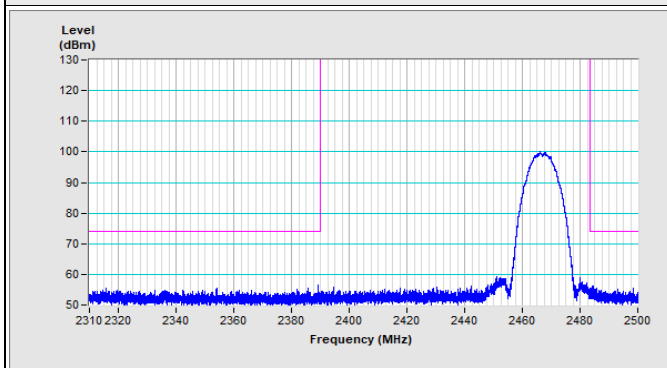


Horizontal (Peak)

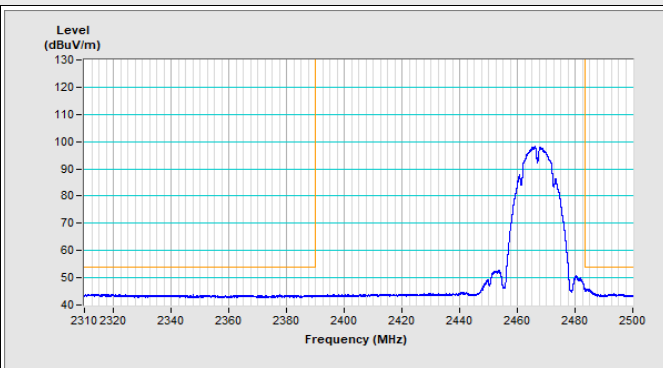

Horizontal (Average)

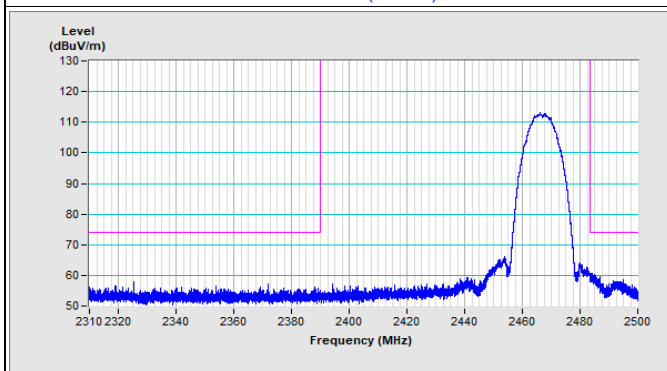


Vertical (Peak)

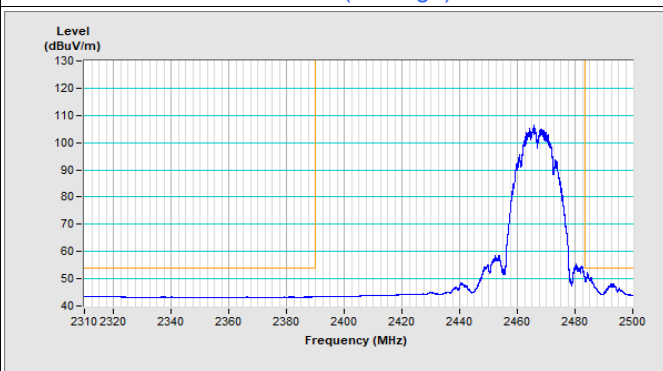


Vertical (Average)


802.11b Channel 13

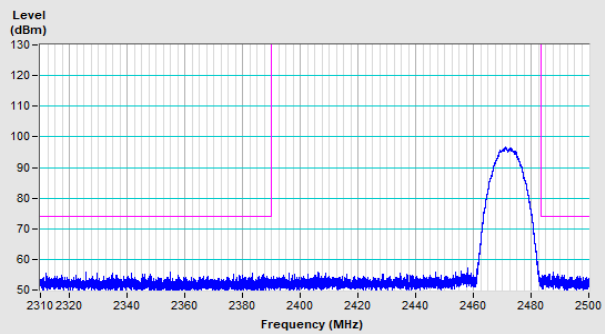


Horizontal (Peak)

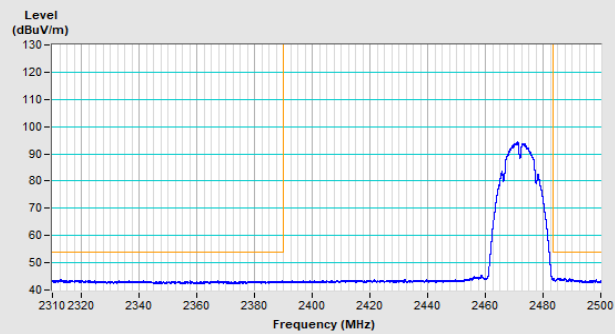

Horizontal (Average)

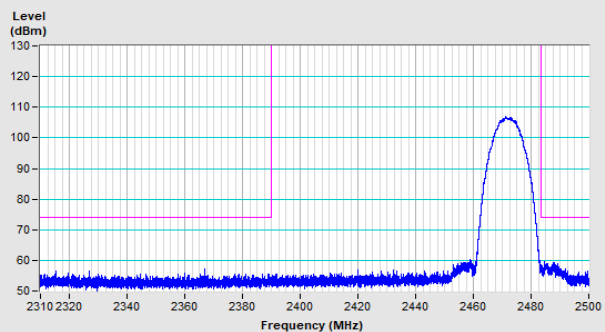


Vertical (Peak)

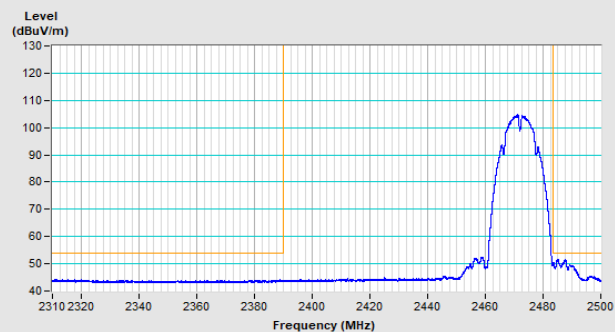


Vertical (Average)


Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

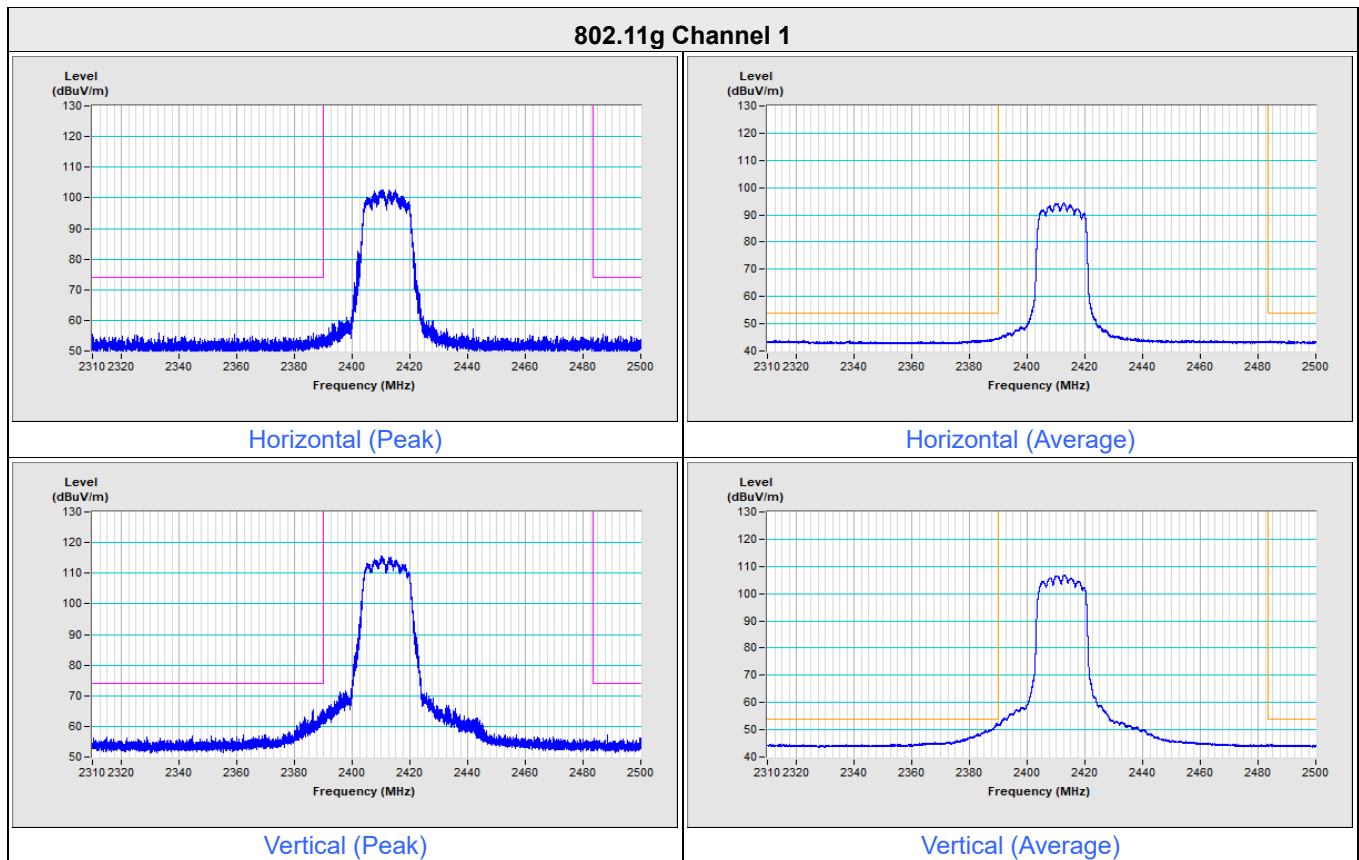


802.11g Channel 2

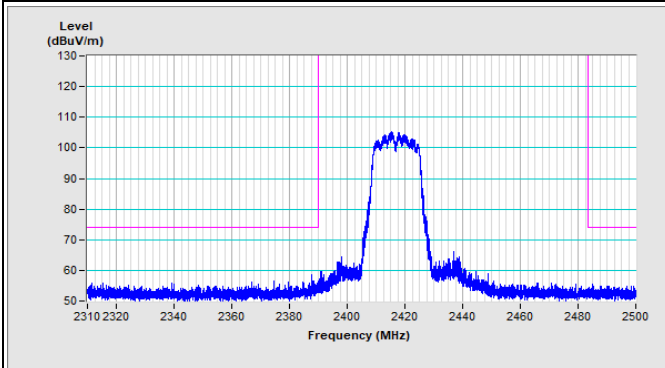


Horizontal (Peak)

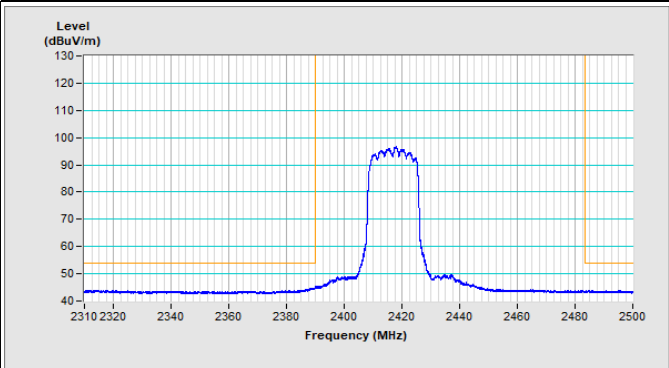

Horizontal (Average)

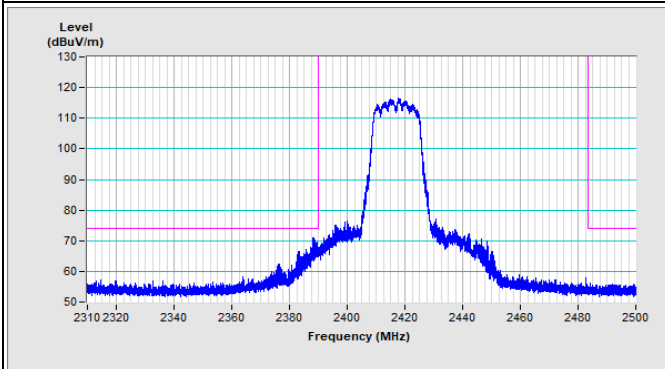


Vertical (Peak)

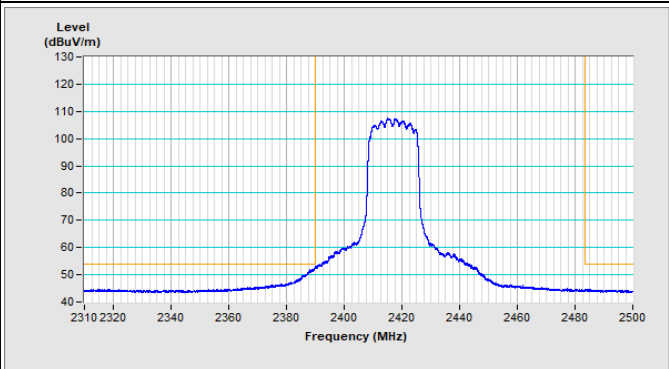


Vertical (Average)


802.11g Channel 10

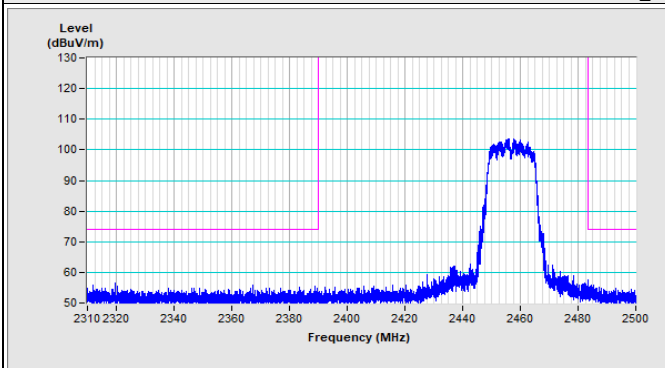


Horizontal (Peak)

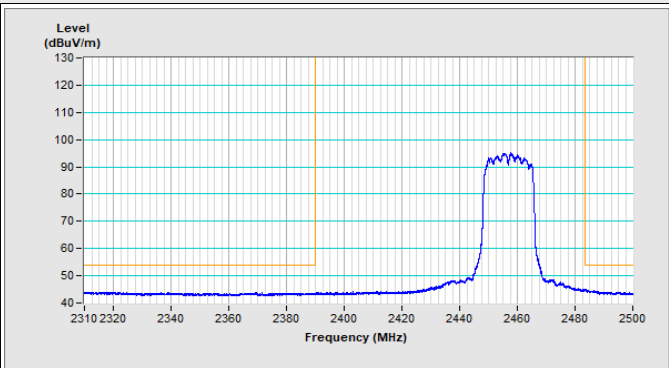

Horizontal (Average)

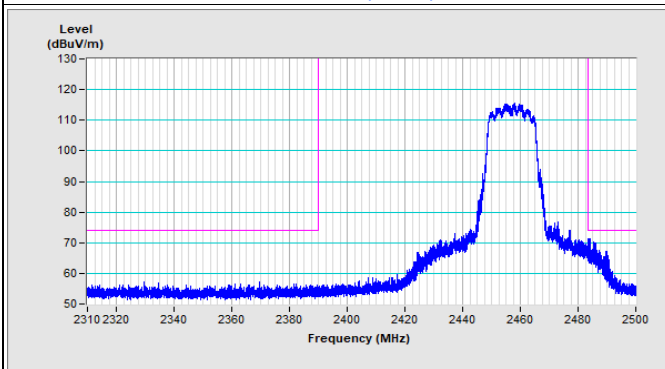


Vertical (Peak)

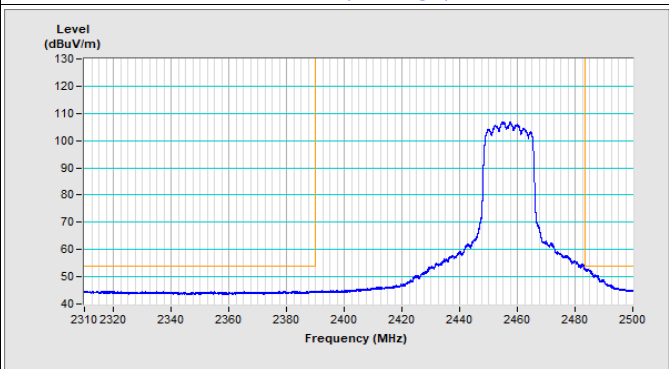


Vertical (Average)


802.11g Channel 11

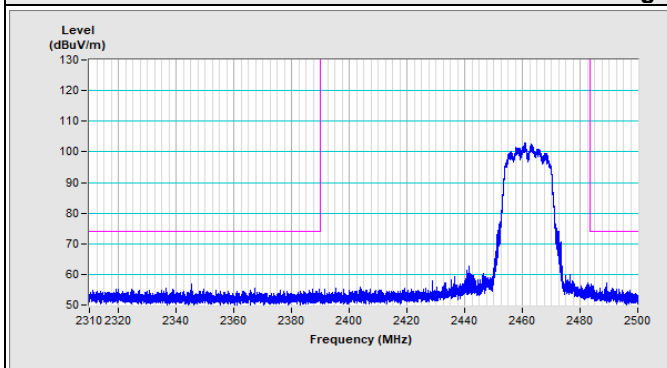


Horizontal (Peak)

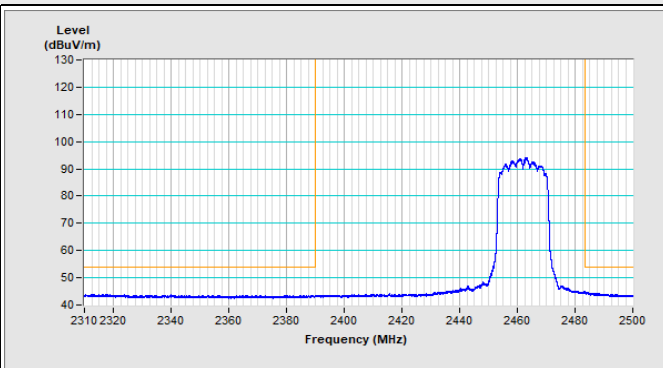

Horizontal (Average)

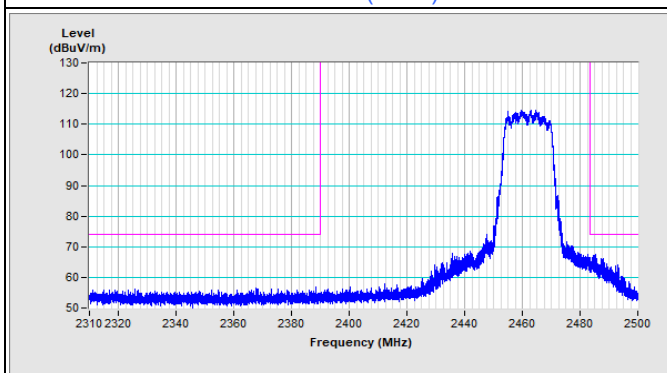


Vertical (Peak)

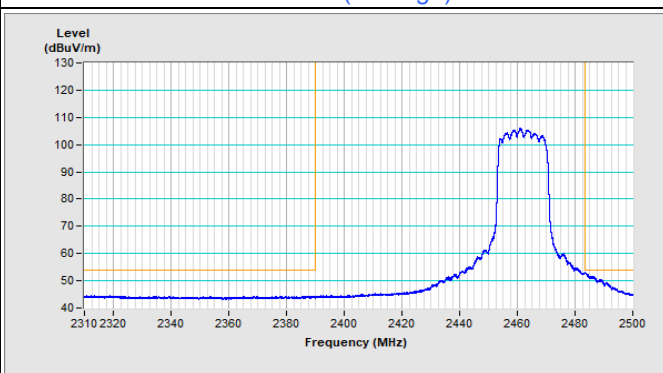


Vertical (Average)


802.11g Channel 12

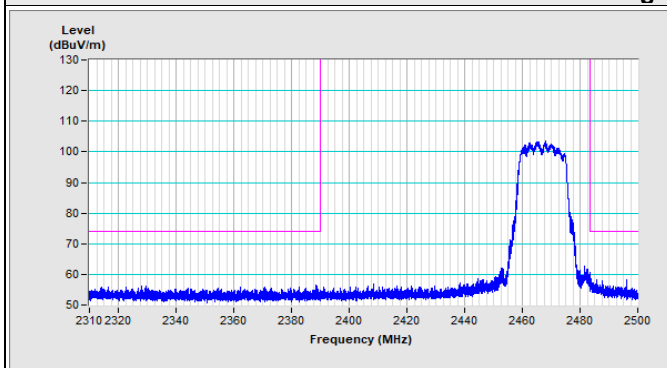


Horizontal (Peak)

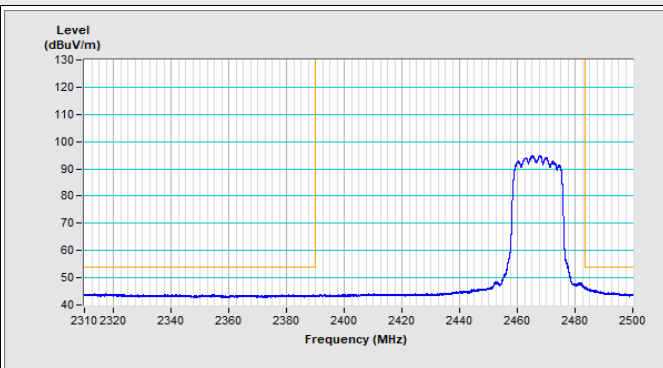

Horizontal (Average)

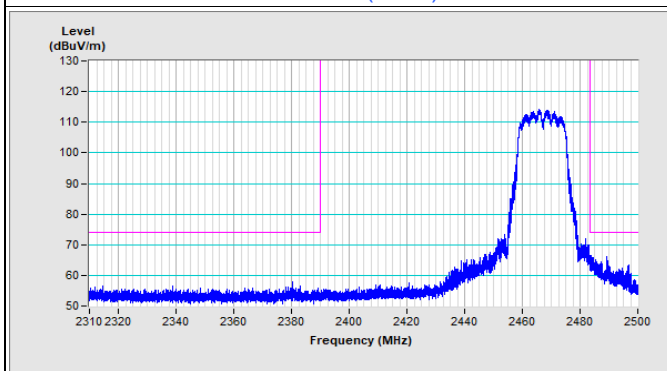


Vertical (Peak)

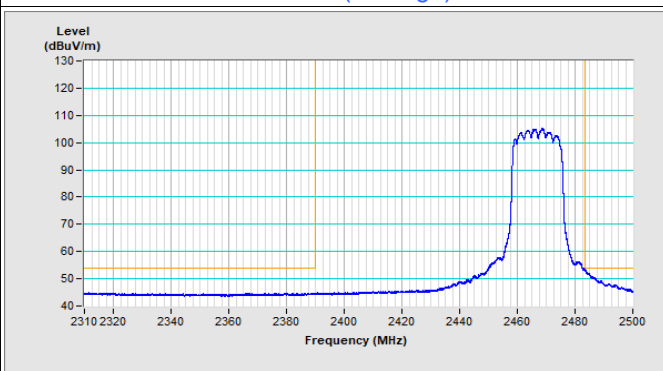


Vertical (Average)


802.11g Channel 13

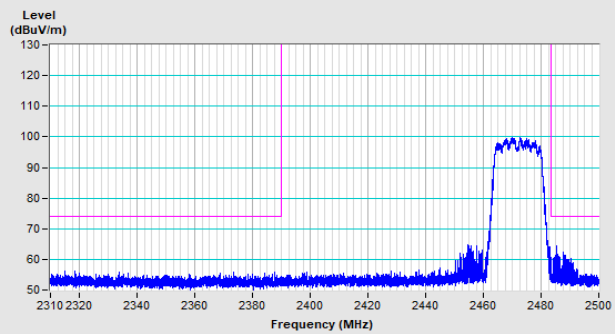


Horizontal (Peak)

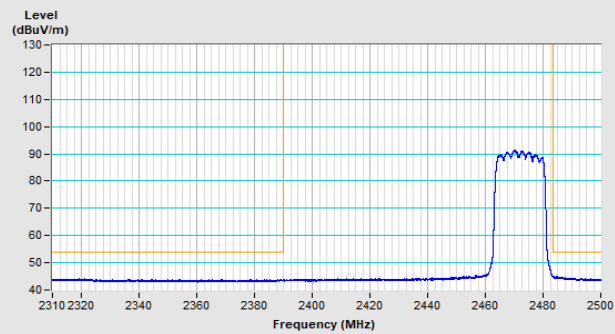

Horizontal (Average)

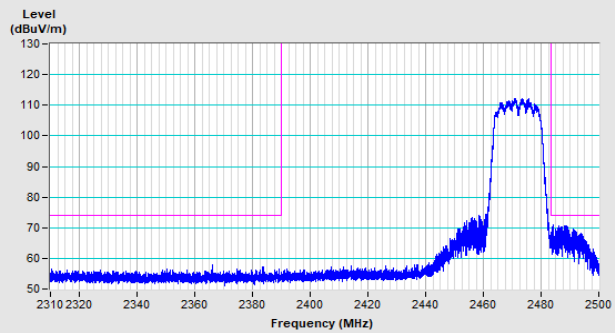


Vertical (Peak)

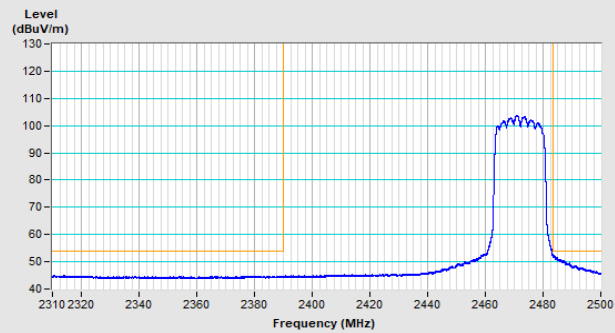


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 1

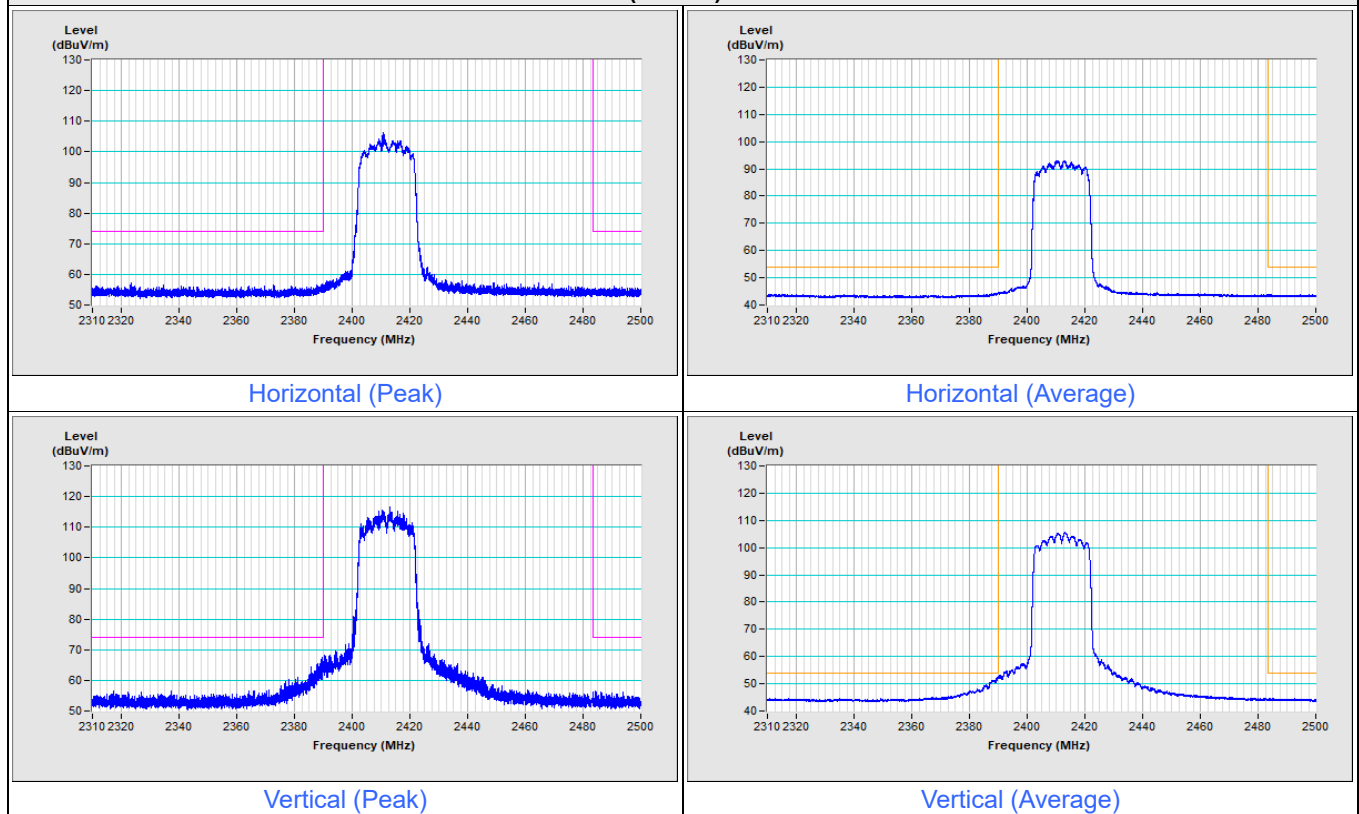


802.11be (EHT20) Channel 2

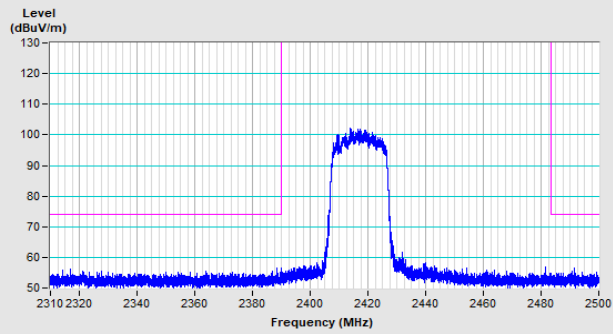


Horizontal (Peak)

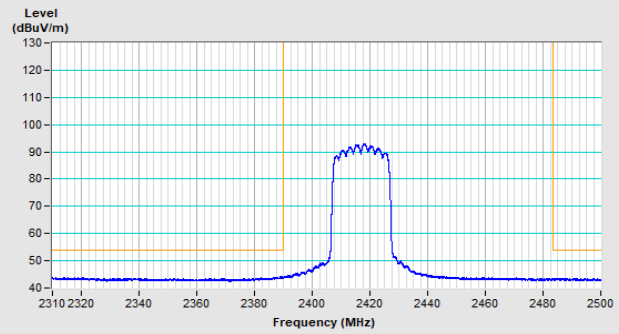

Horizontal (Average)

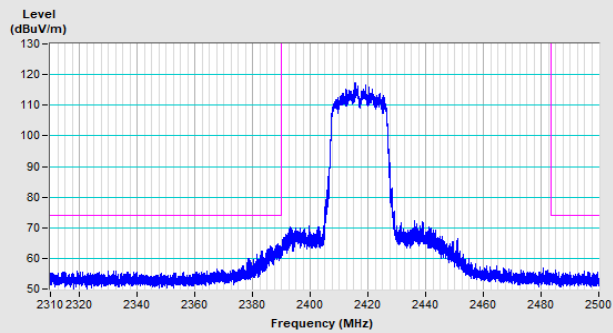


Vertical (Peak)

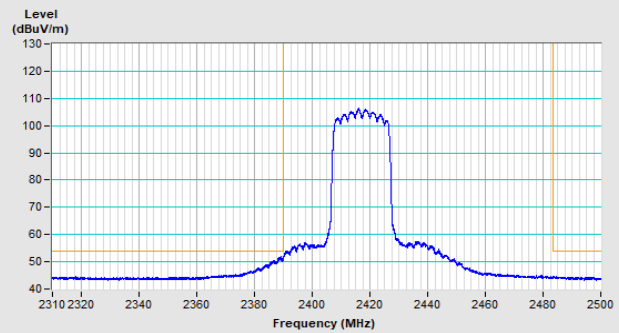


Vertical (Average)


802.11be (EHT20) Channel 10

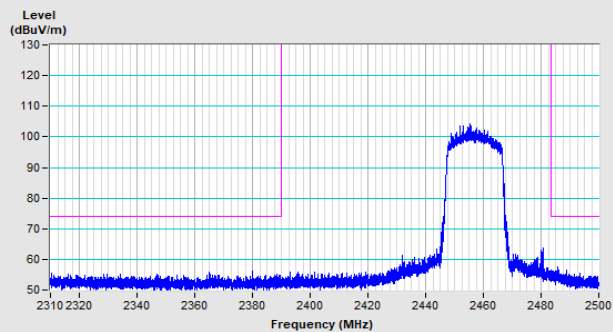


Horizontal (Peak)

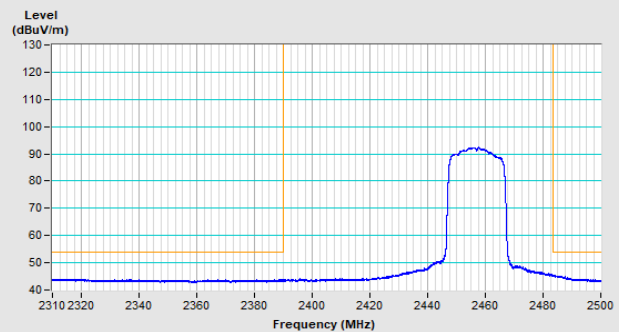

Horizontal (Average)

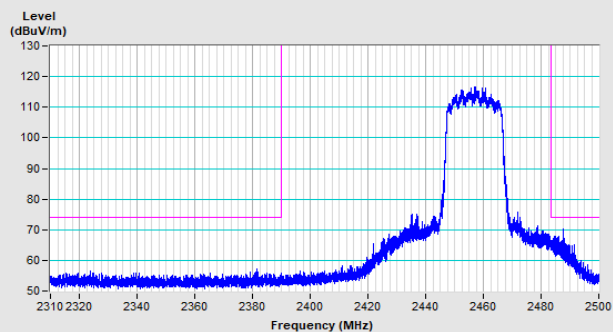


Vertical (Peak)

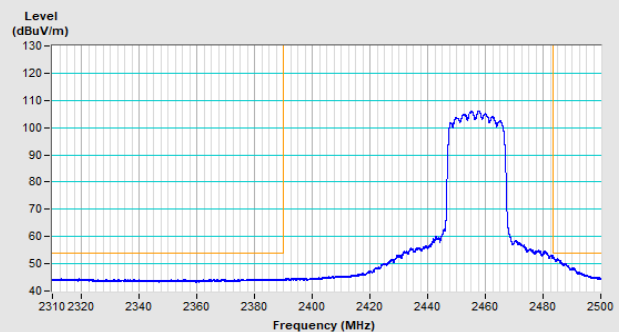


Vertical (Average)


802.11be (EHT20) Channel 11

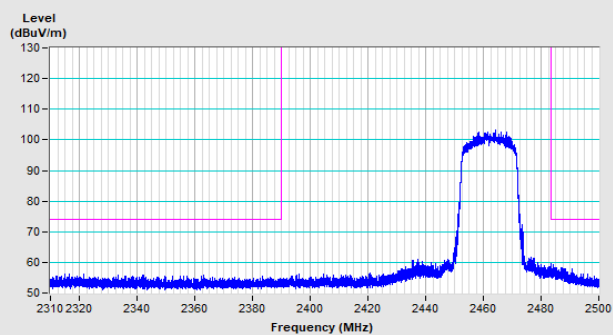


Horizontal (Peak)

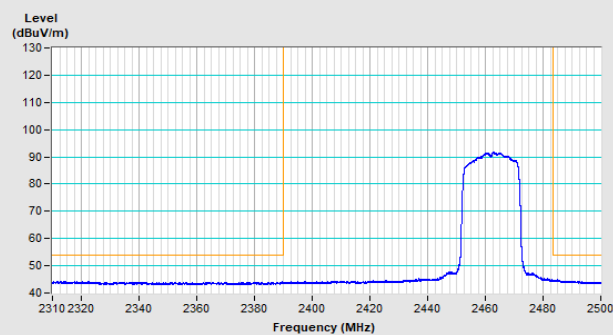

Horizontal (Average)

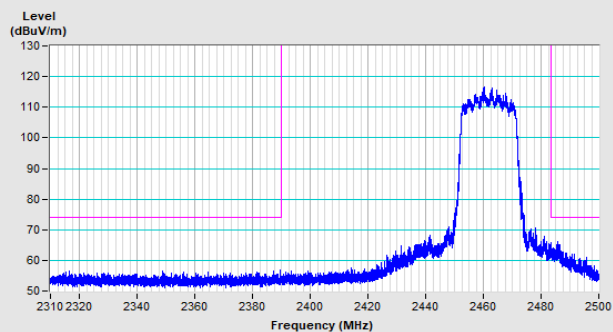


Vertical (Peak)

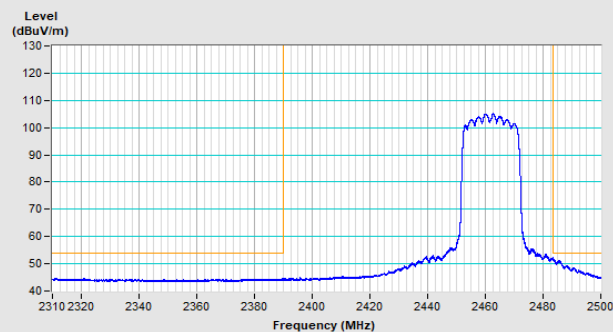


Vertical (Average)


802.11be (EHT20) Channel 12

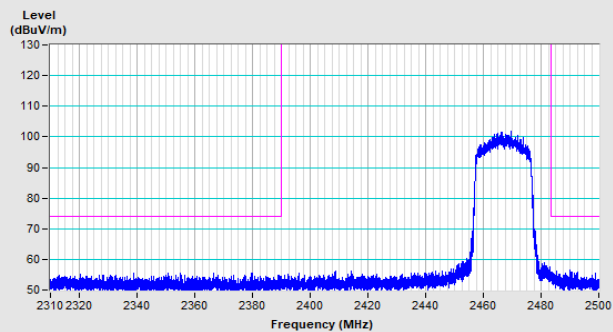


Horizontal (Peak)

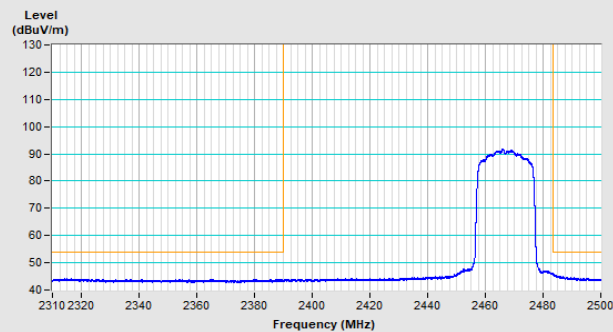

Horizontal (Average)

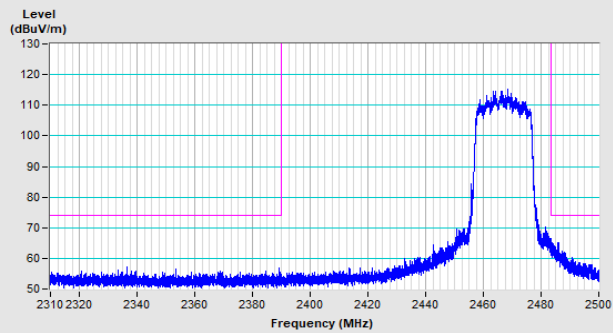


Vertical (Peak)

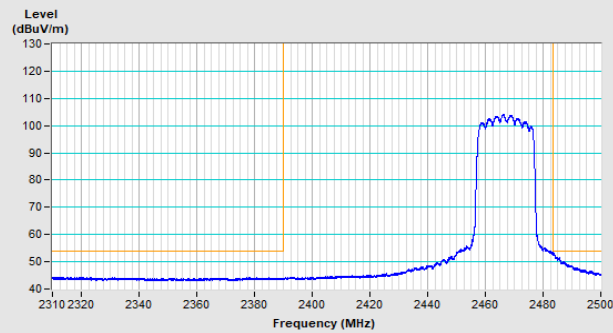


Vertical (Average)


802.11be (EHT20) Channel 13

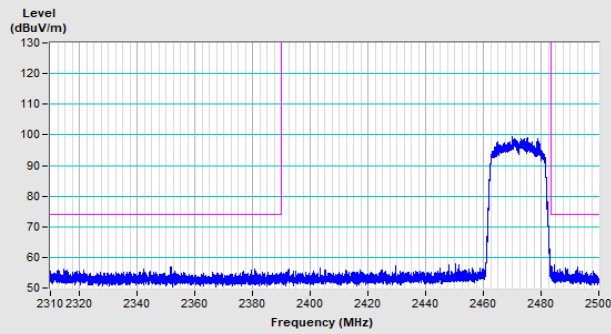


Horizontal (Peak)

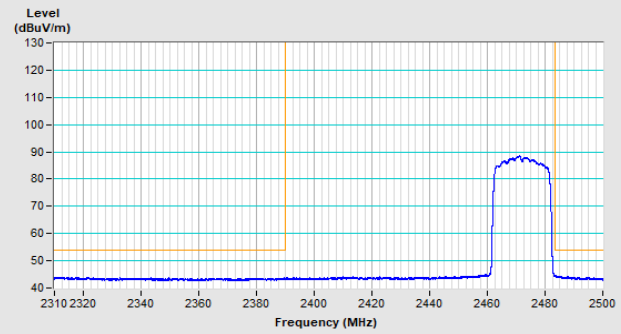

Horizontal (Average)

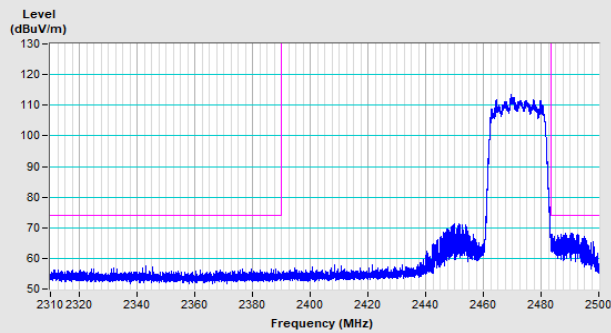


Vertical (Peak)

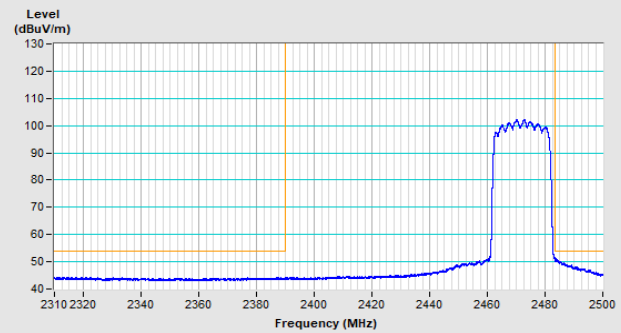


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 3

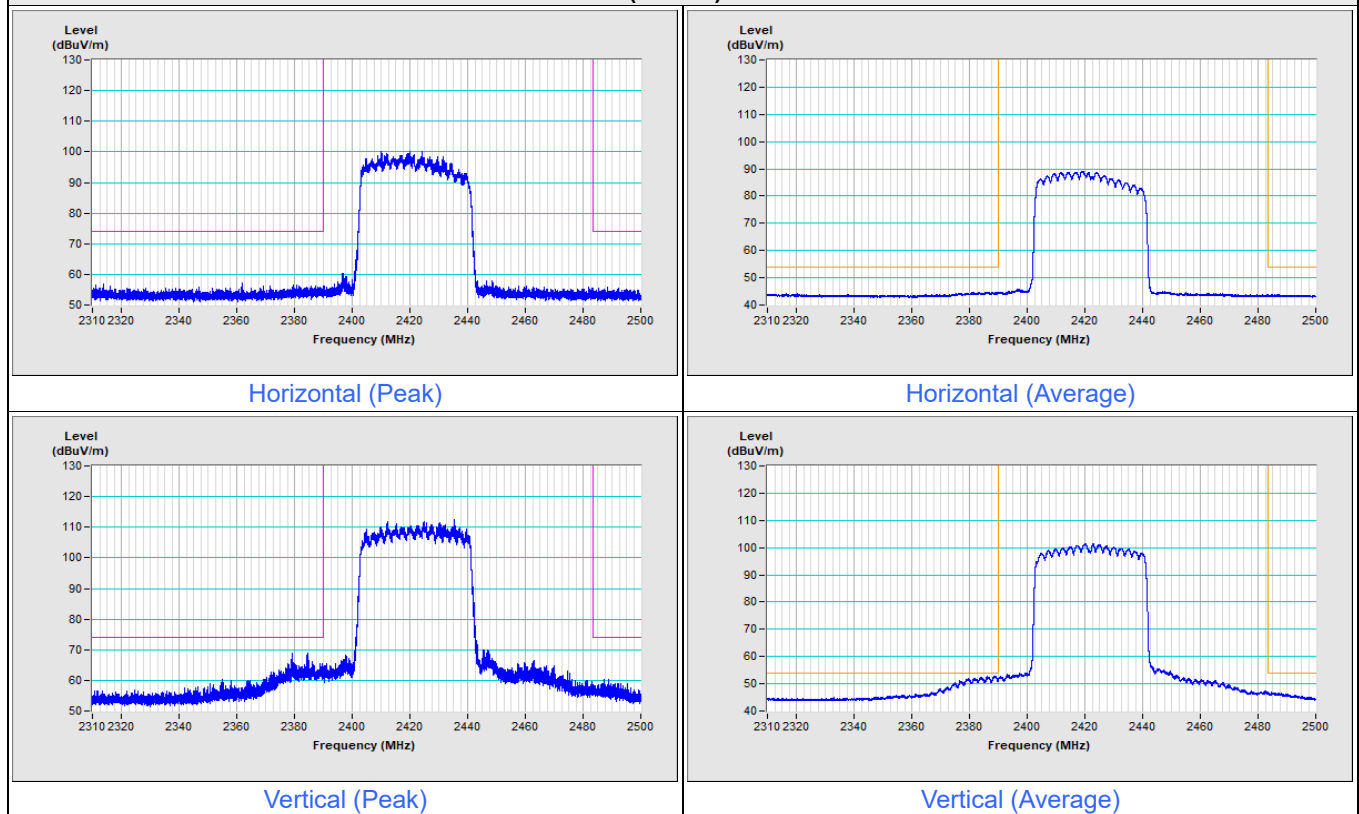


802.11be (EHT40) Channel 9

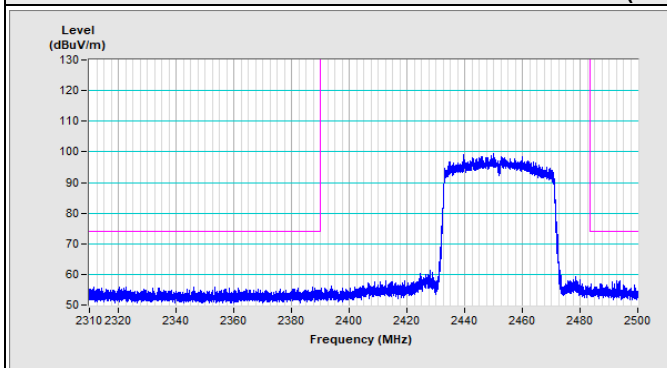


Horizontal (Peak)

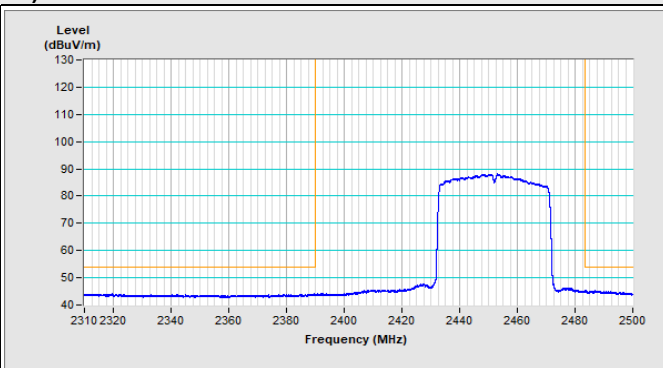

Horizontal (Average)

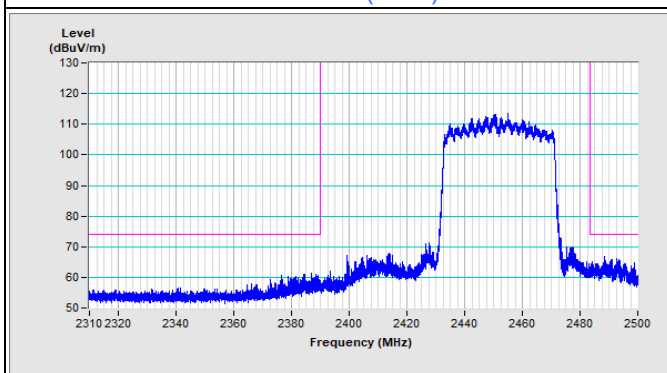


Vertical (Peak)

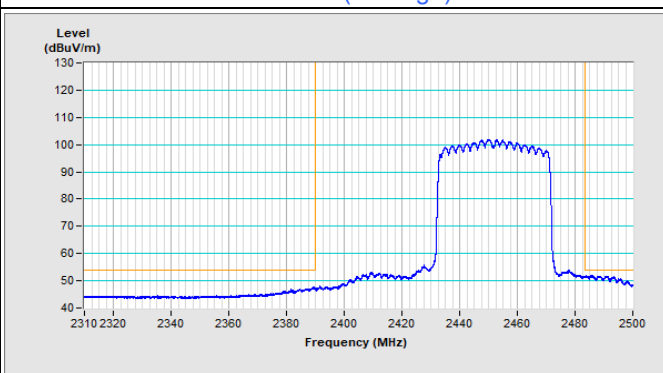


Vertical (Average)


802.11be (EHT40) Channel 10

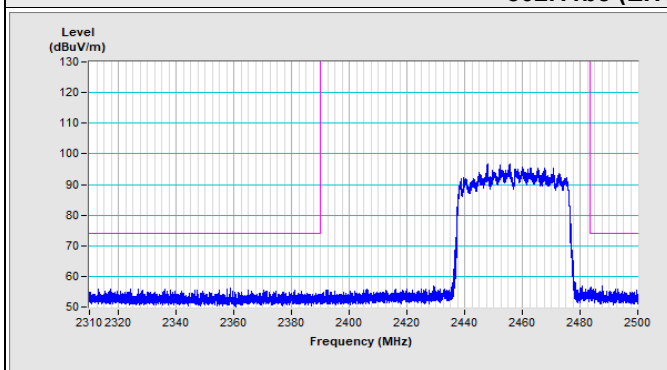


Horizontal (Peak)

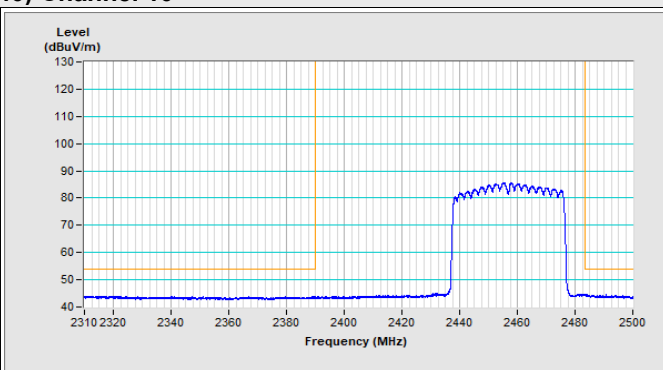

Horizontal (Average)

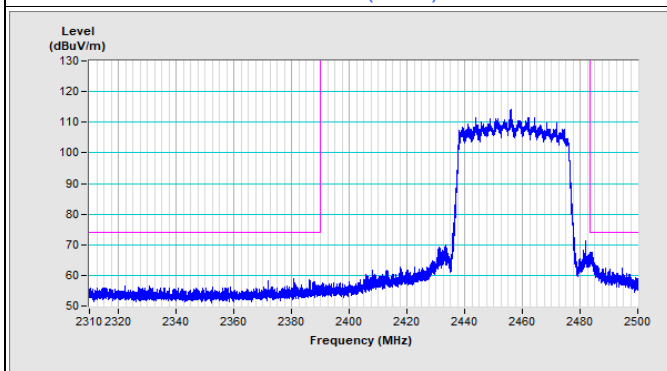


Vertical (Peak)

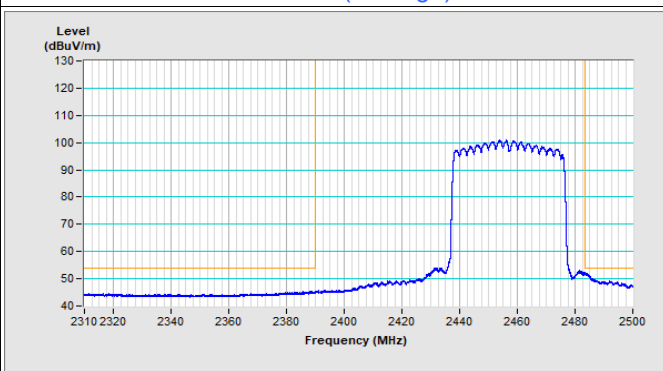


Vertical (Average)


802.11be (EHT40) Channel 11

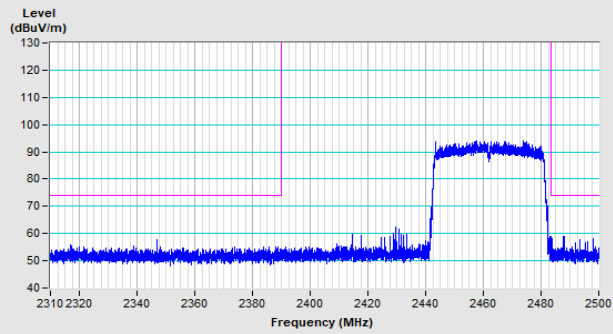


Horizontal (Peak)

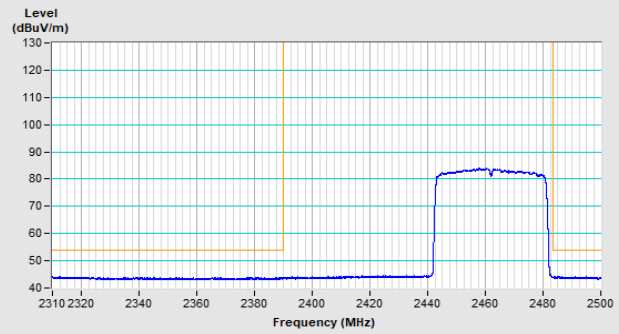

Horizontal (Average)

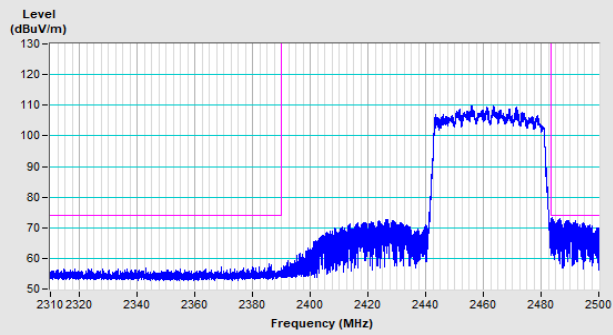


Vertical (Peak)

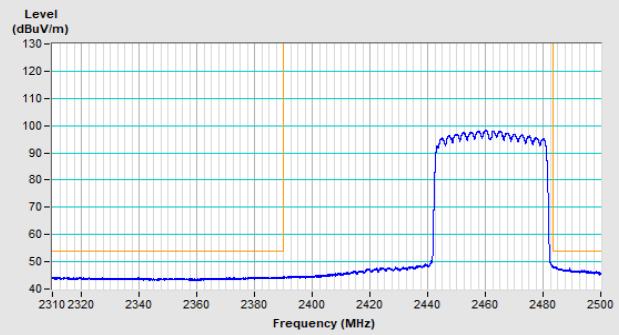


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 1

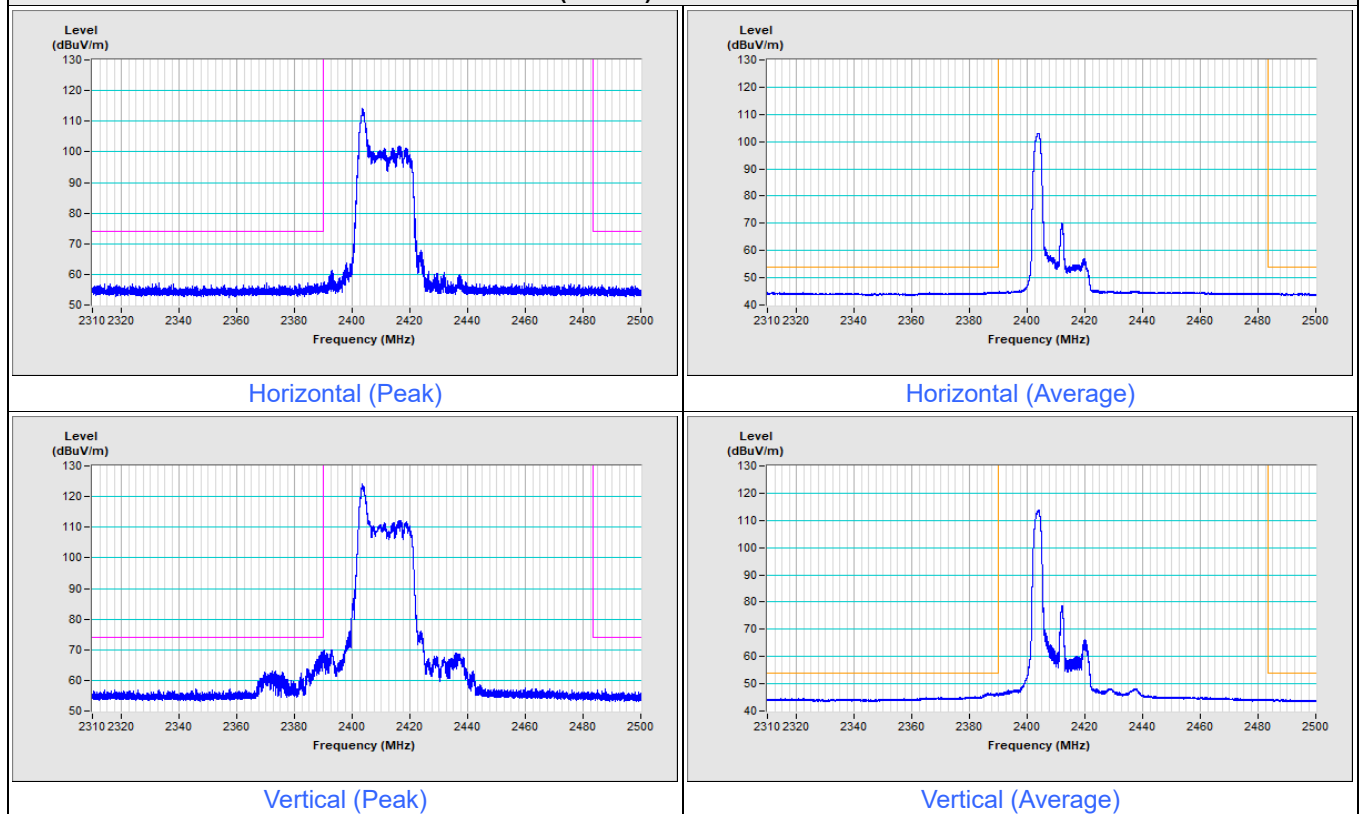


802.11be (EHT20) 26-tone RU Channel 2

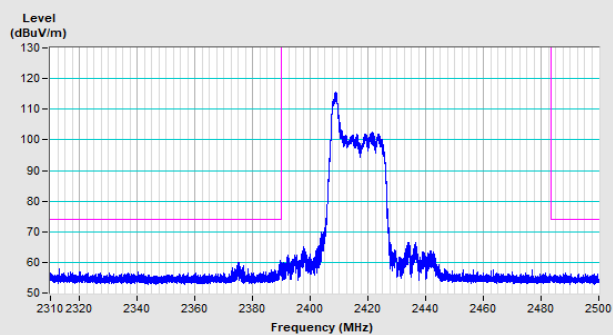


Horizontal (Peak)

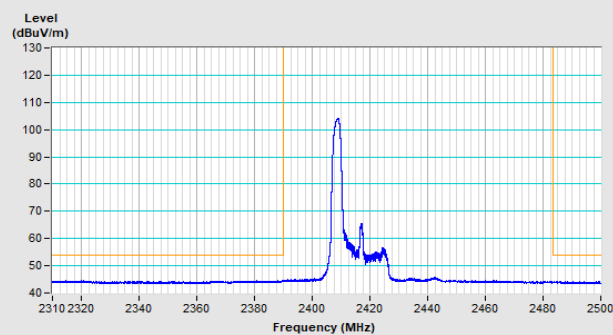

Horizontal (Average)

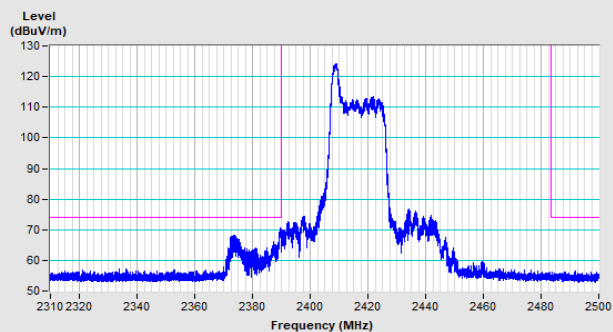


Vertical (Peak)

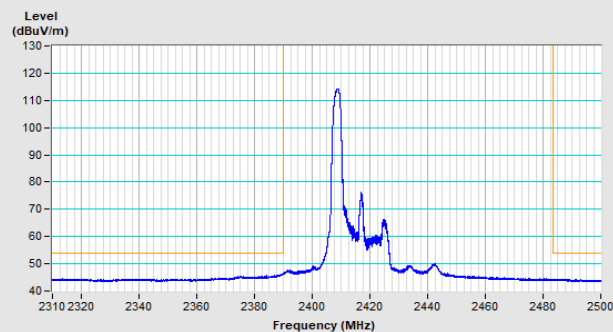


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 10

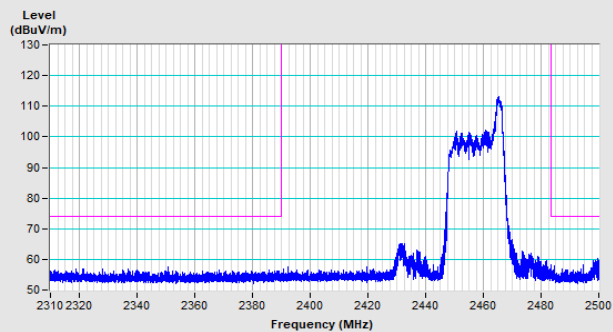


Horizontal (Peak)

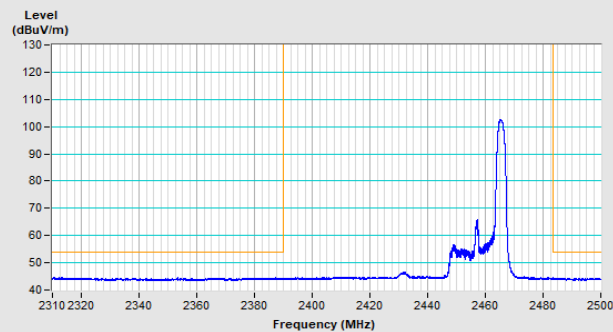

Horizontal (Average)

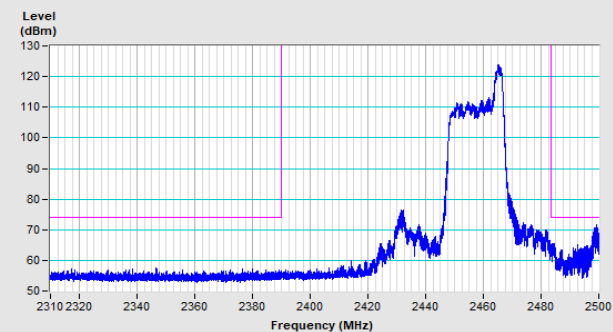


Vertical (Peak)

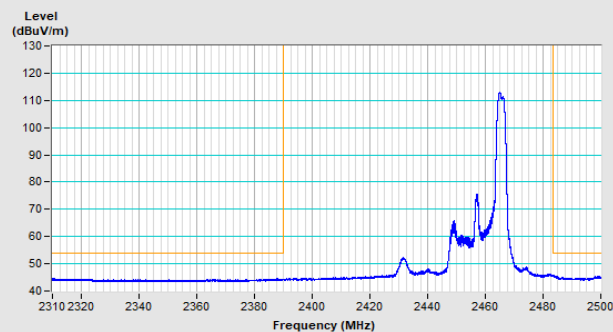


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 11

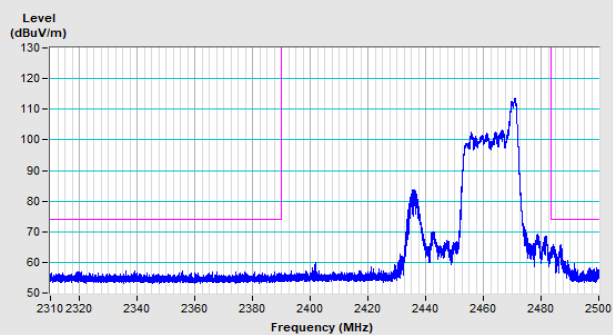


Horizontal (Peak)

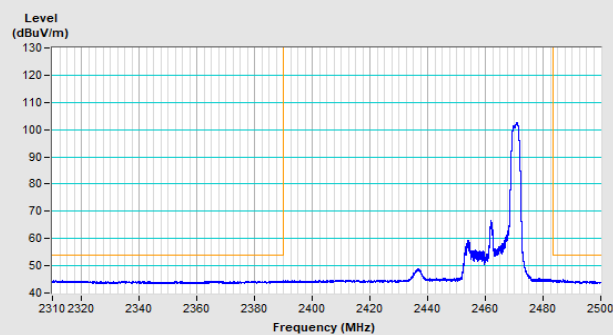

Horizontal (Average)

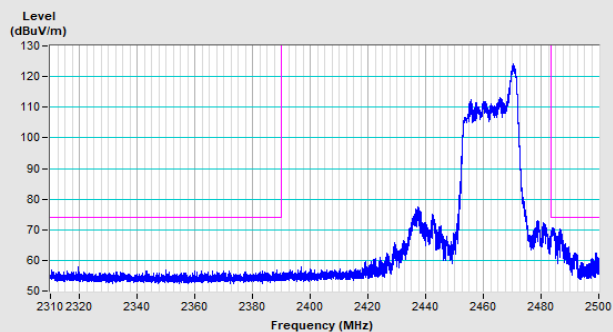


Vertical (Peak)

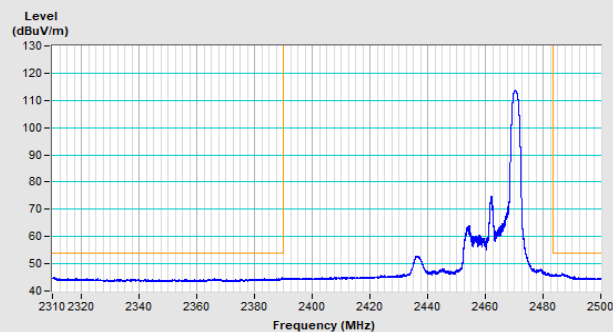


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 12

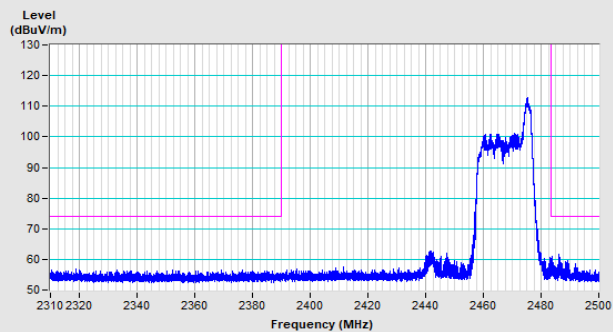


Horizontal (Peak)

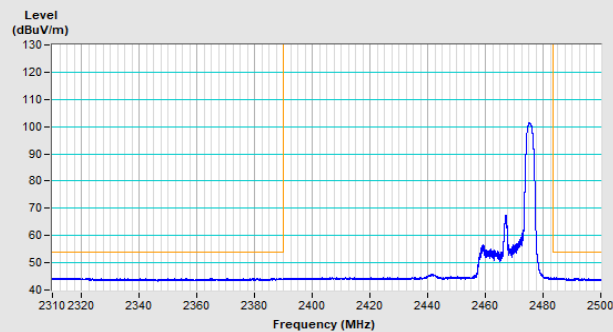

Horizontal (Average)

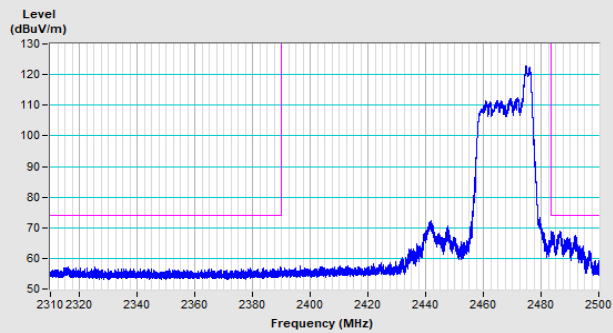


Vertical (Peak)

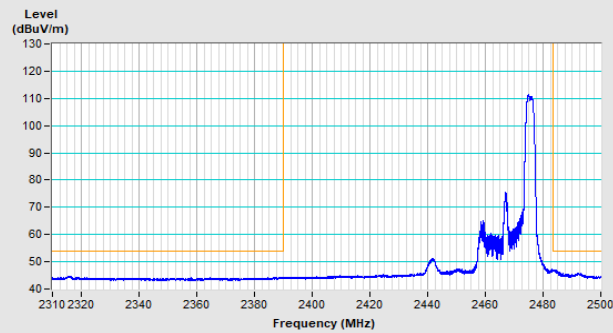


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 13

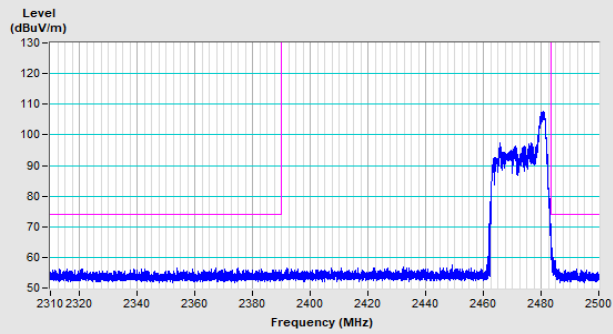


Horizontal (Peak)

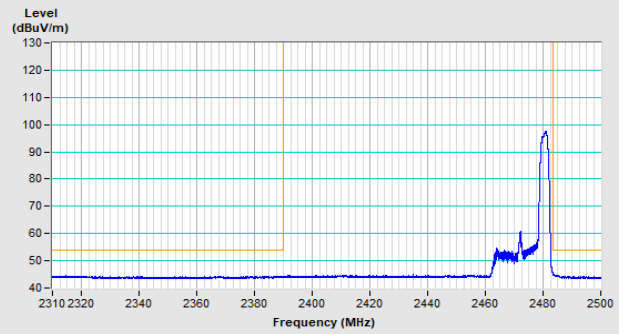

Horizontal (Average)

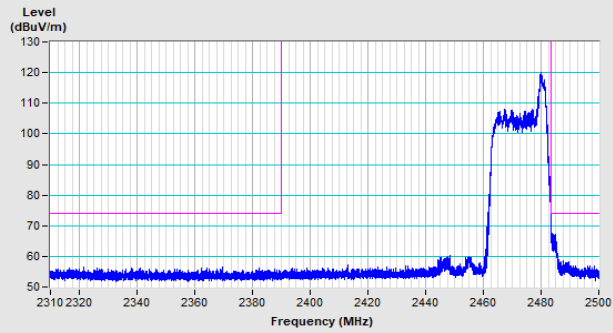


Vertical (Peak)

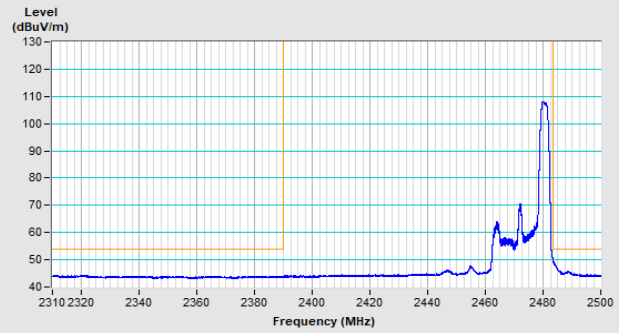


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 1

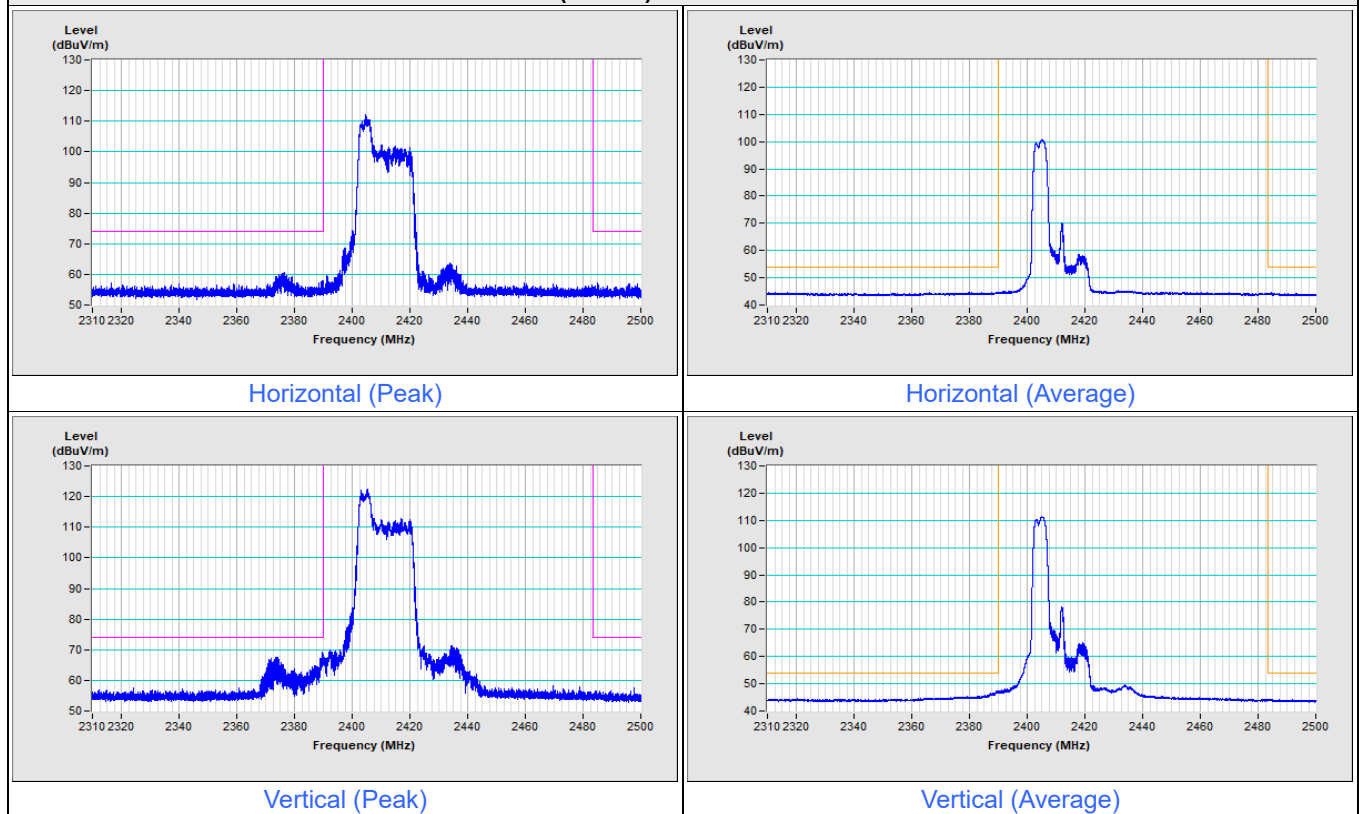


802.11be (EHT20) 52-tone RU Channel 2

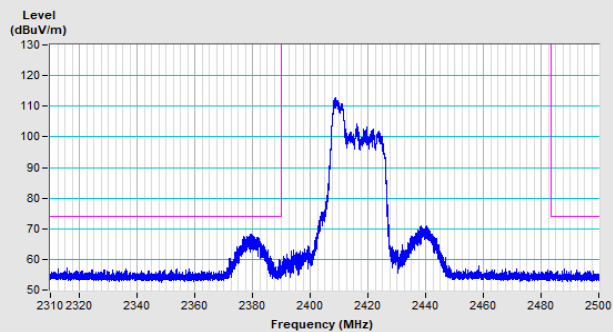


Horizontal (Peak)

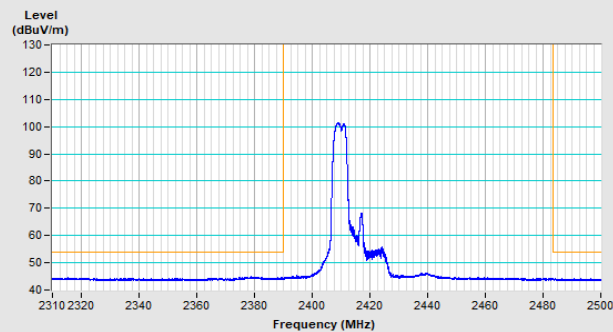

Horizontal (Average)

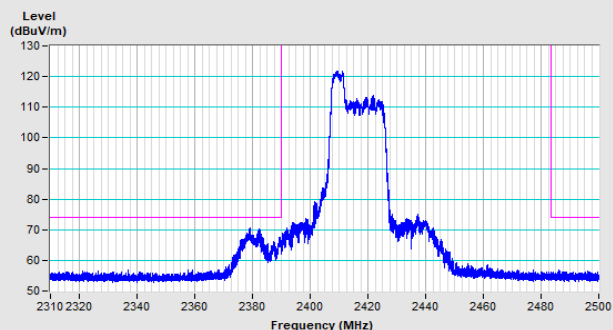


Vertical (Peak)

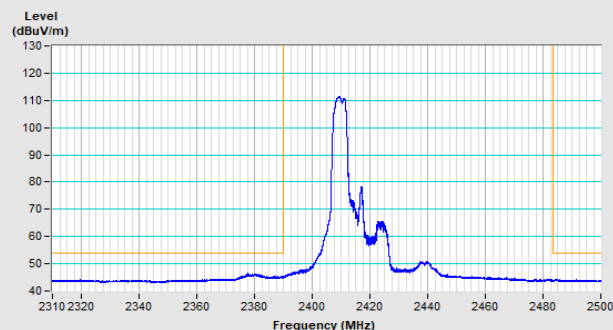


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 10

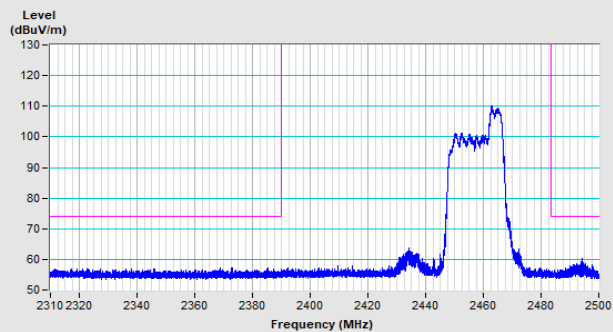


Horizontal (Peak)

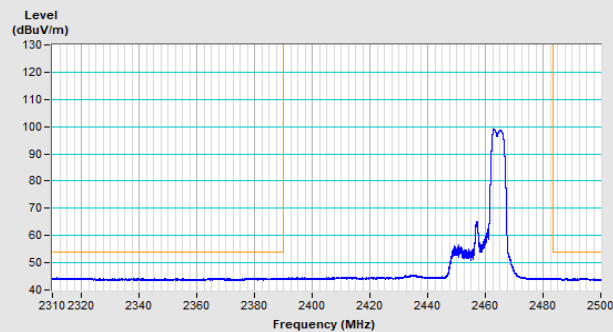

Horizontal (Average)

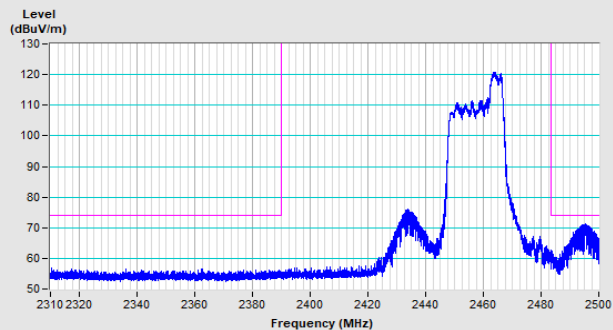


Vertical (Peak)

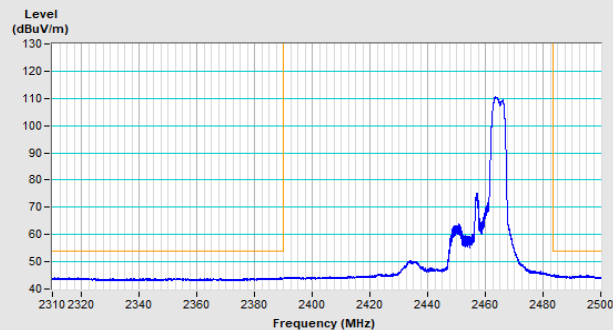


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 11

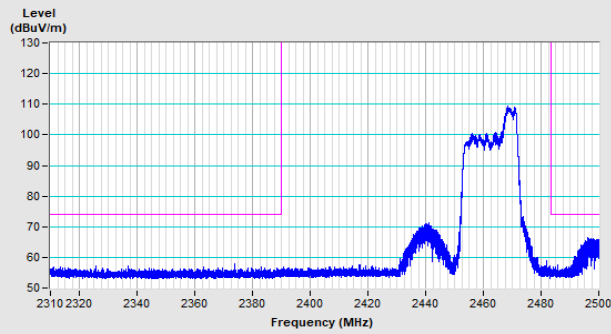


Horizontal (Peak)

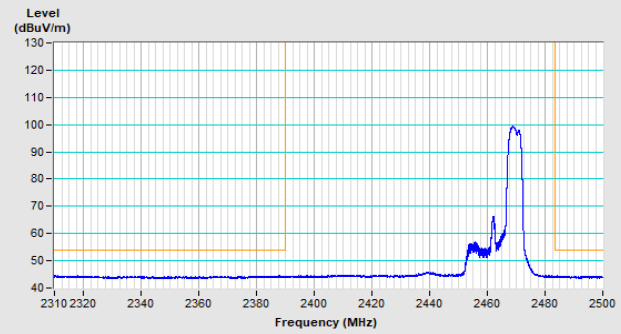

Horizontal (Average)

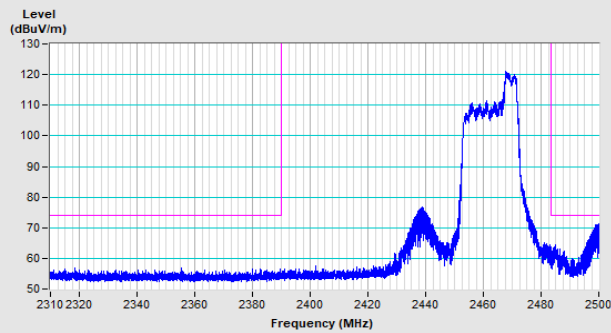


Vertical (Peak)

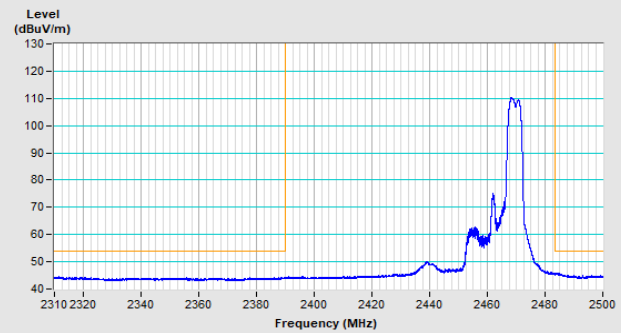


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 12

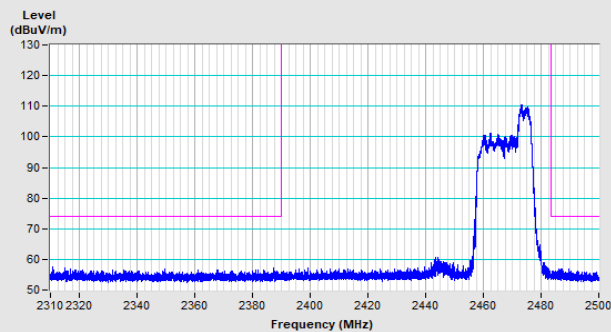


Horizontal (Peak)

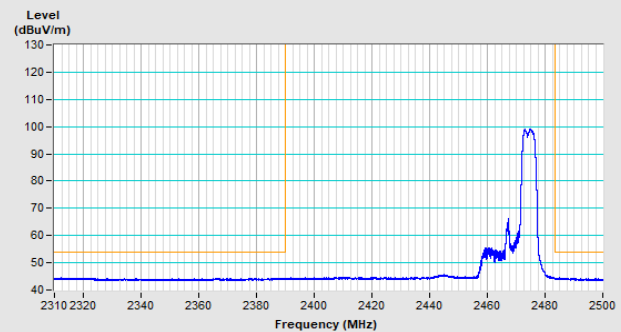

Horizontal (Average)

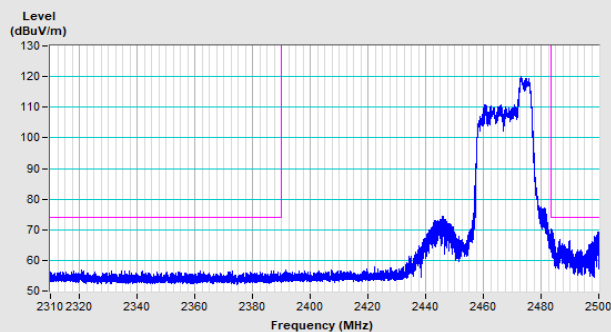


Vertical (Peak)

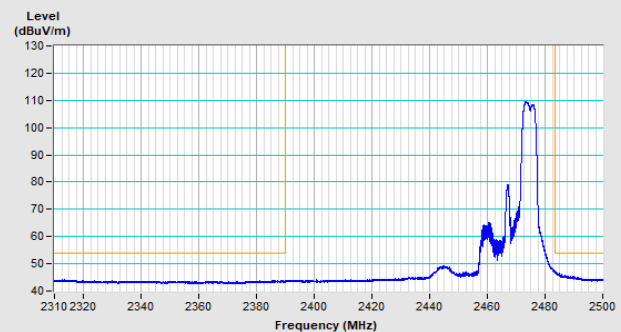


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 13

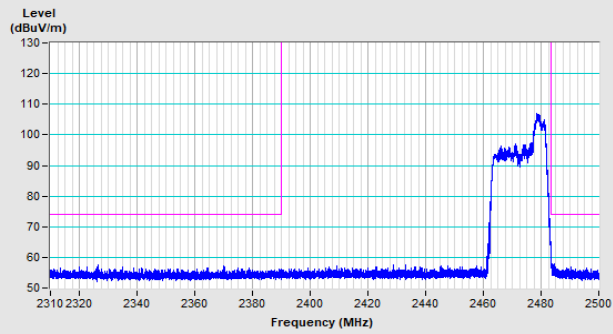


Horizontal (Peak)

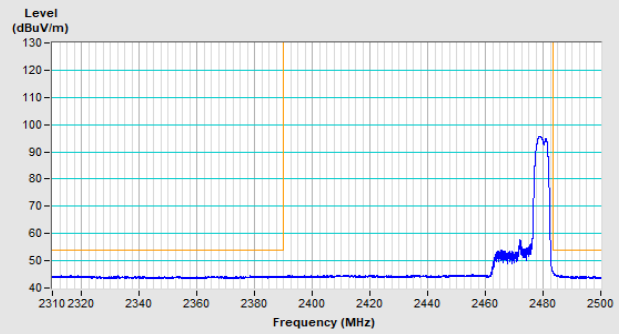

Horizontal (Average)

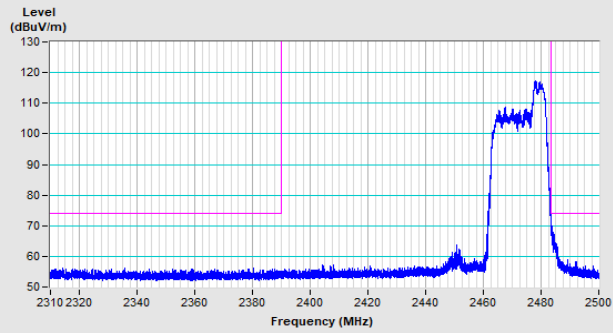


Vertical (Peak)

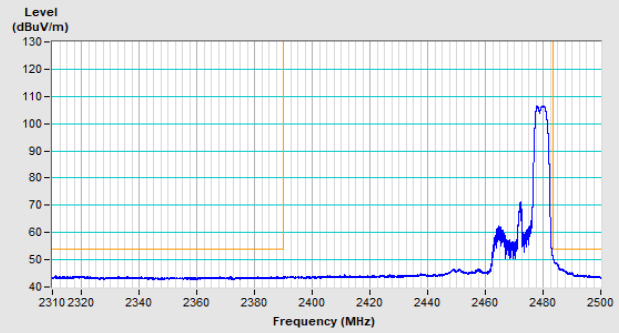


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 1

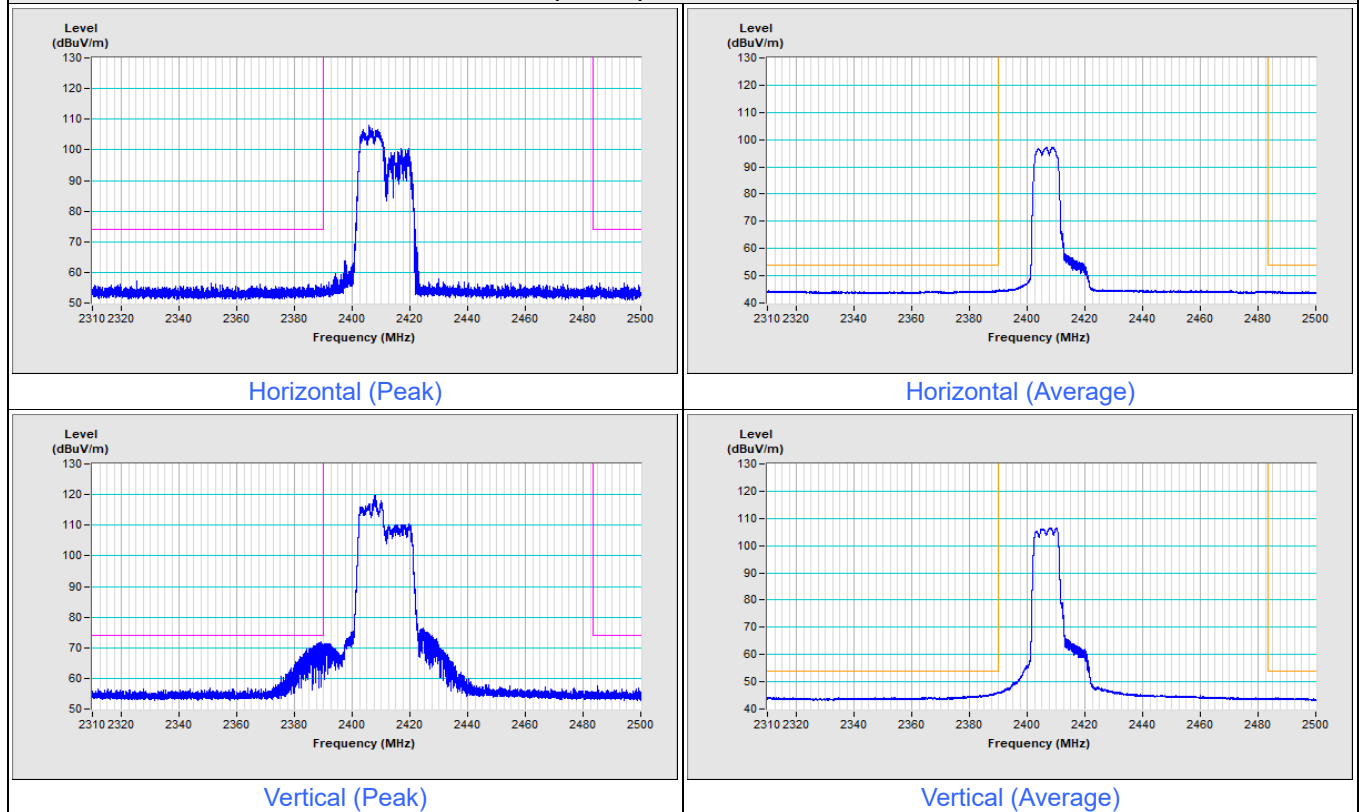


802.11be (EHT20) 106-tone RU Channel 2

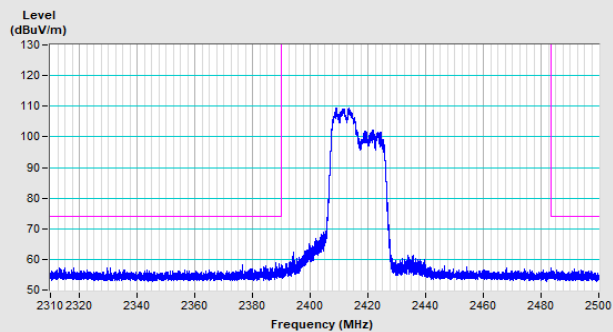


Horizontal (Peak)

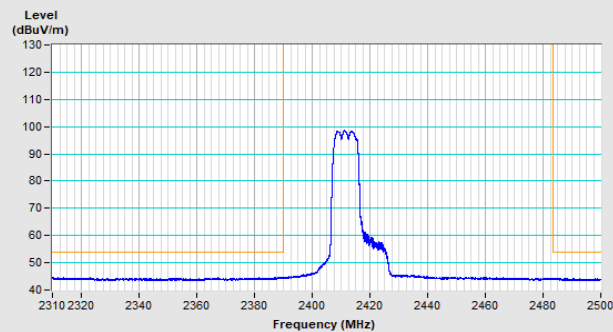

Horizontal (Average)

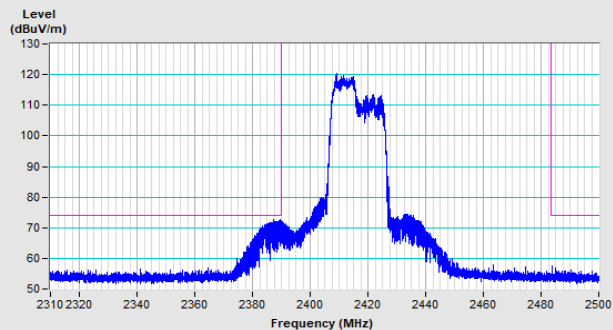


Vertical (Peak)

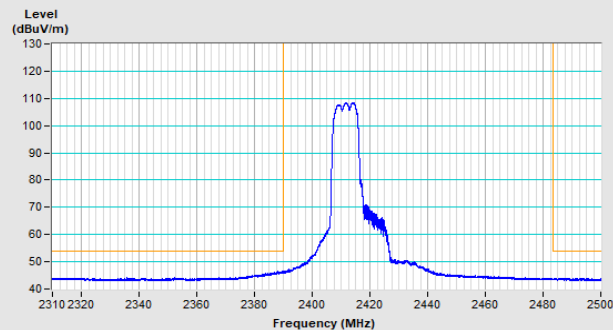


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 10

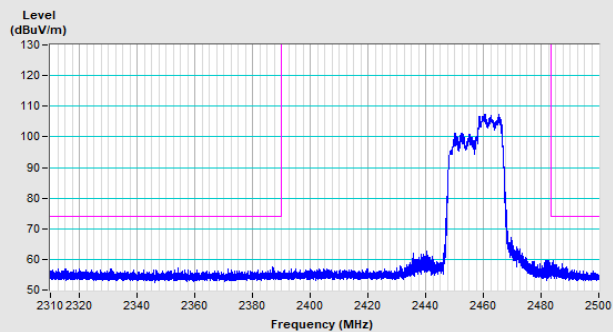


Horizontal (Peak)

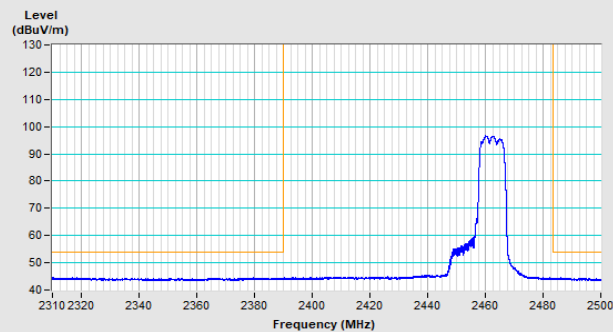

Horizontal (Average)

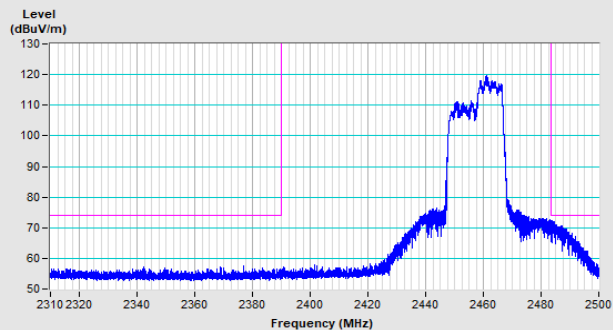


Vertical (Peak)

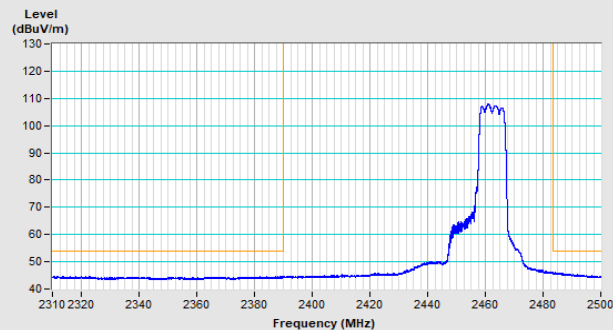


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 11

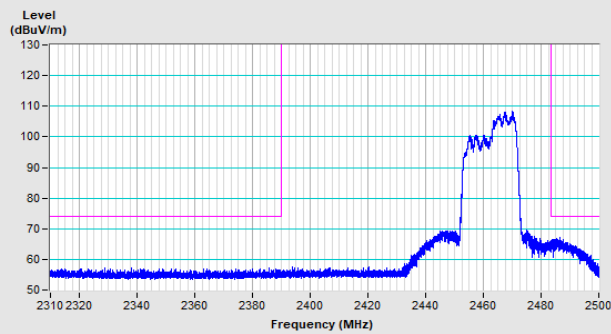


Horizontal (Peak)

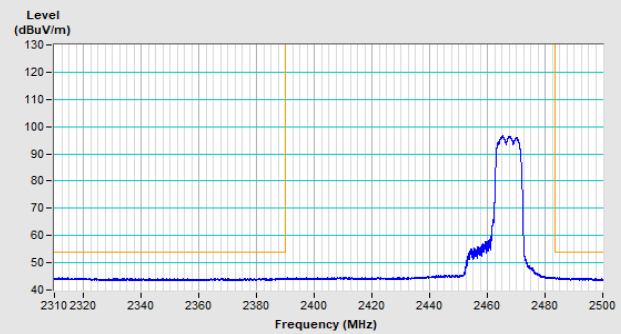

Horizontal (Average)

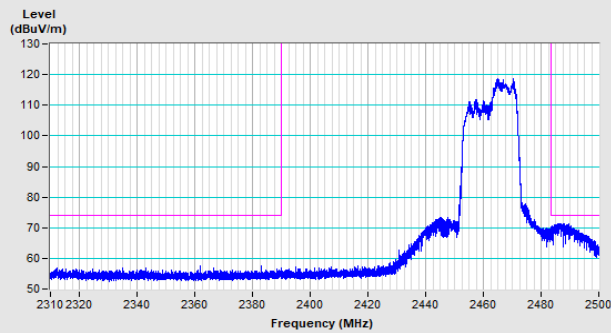


Vertical (Peak)

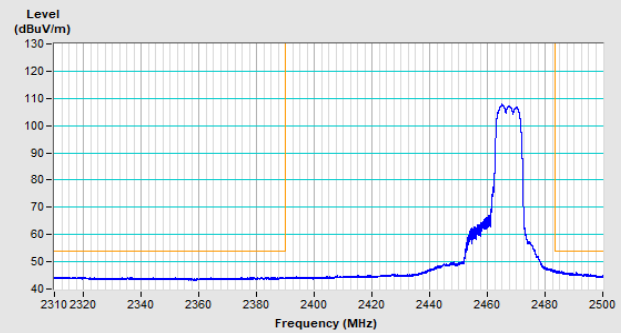


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 12

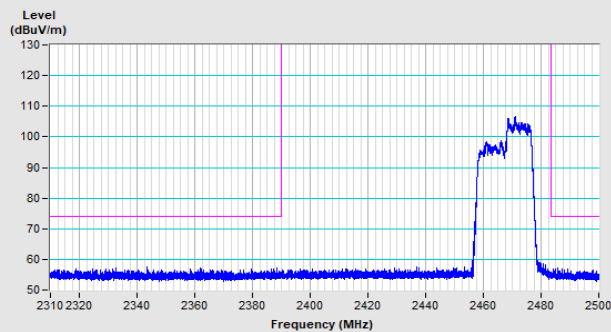


Horizontal (Peak)

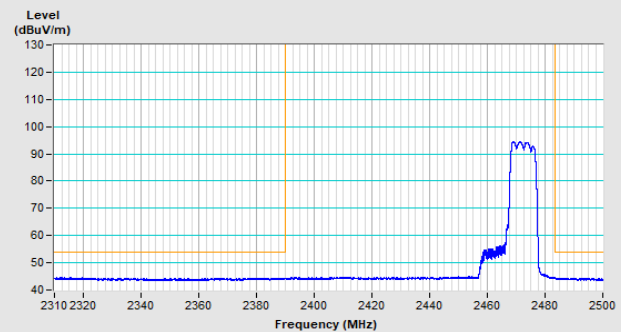

Horizontal (Average)

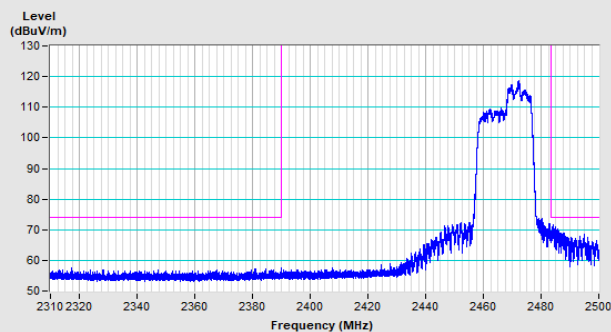


Vertical (Peak)

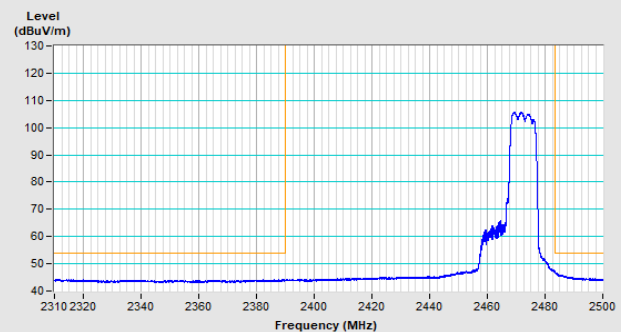


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 13

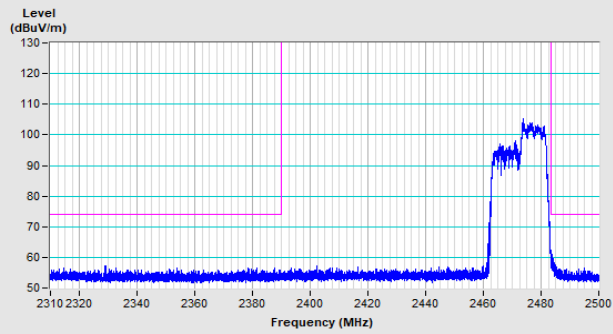


Horizontal (Peak)

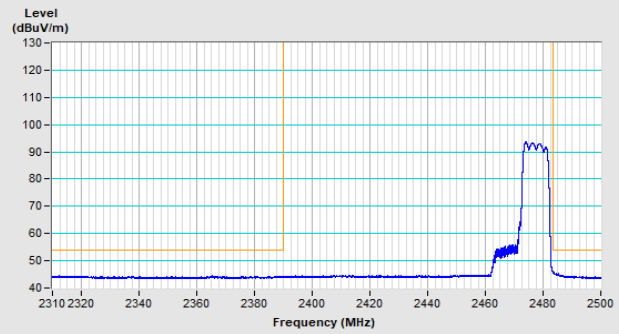

Horizontal (Average)

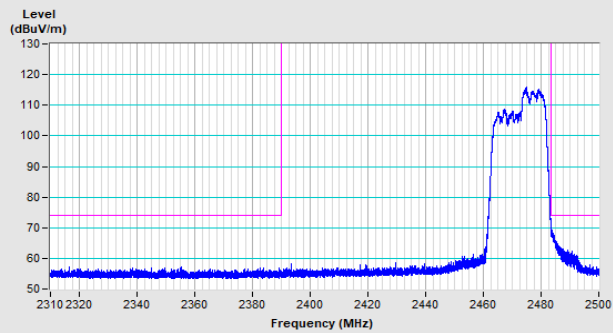


Vertical (Peak)

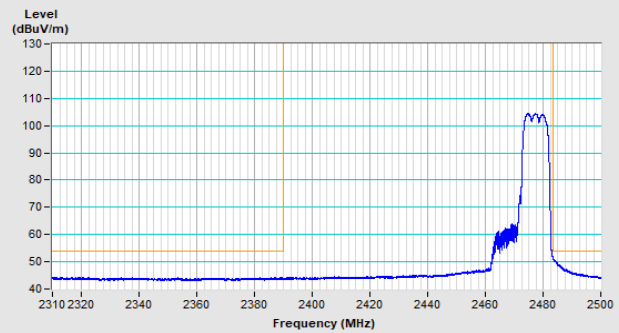


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52+26-tone MRU Channel 1

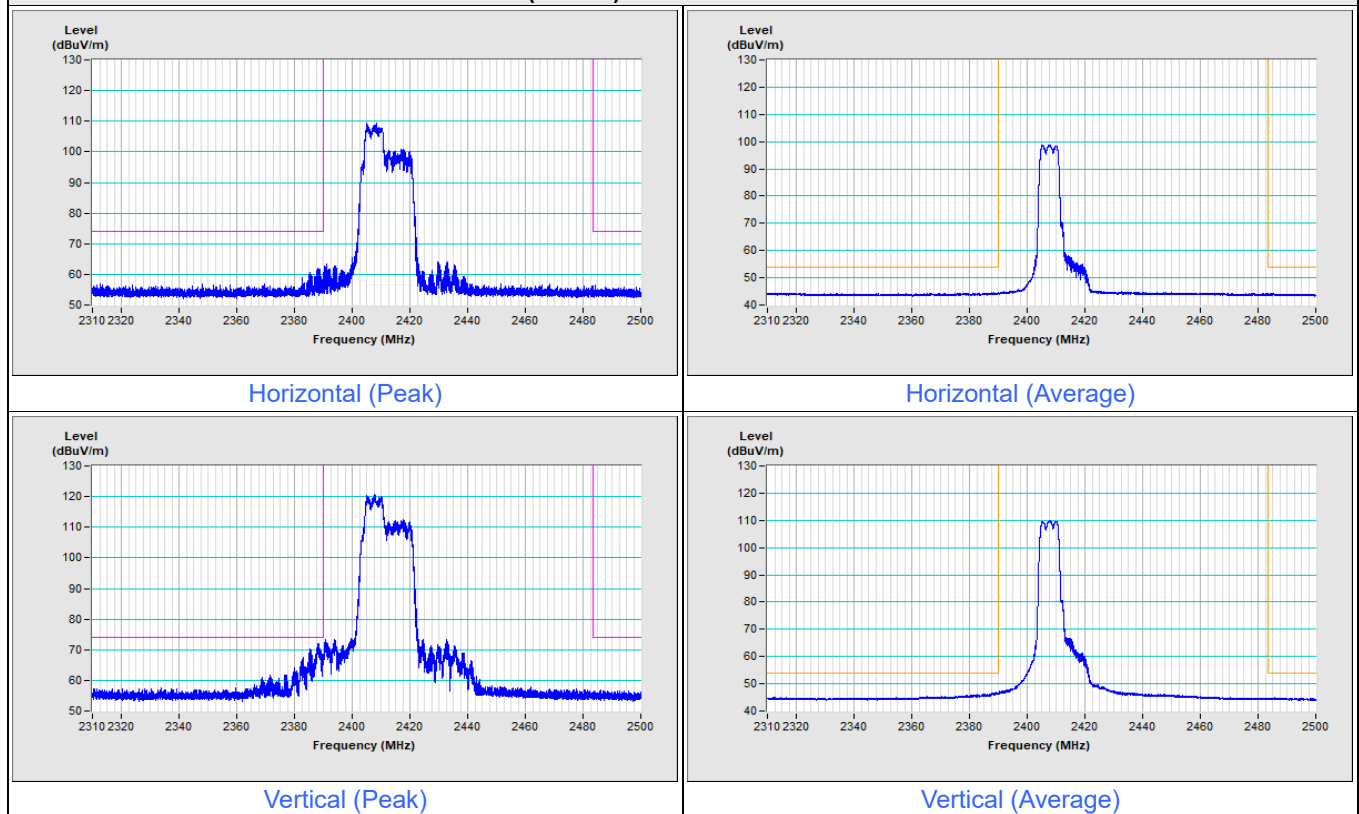


802.11be (EHT20) 52+26-tone MRU Channel 2

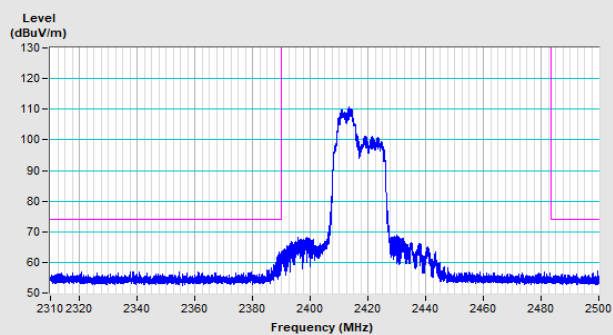


Horizontal (Peak)

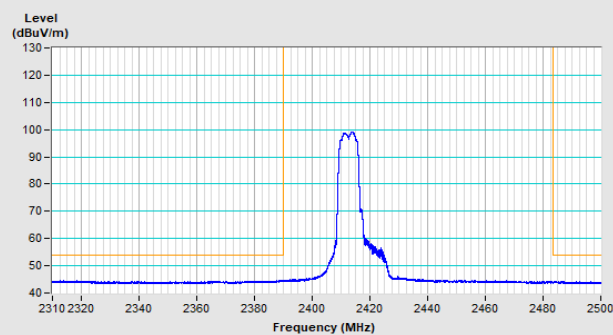

Horizontal (Average)

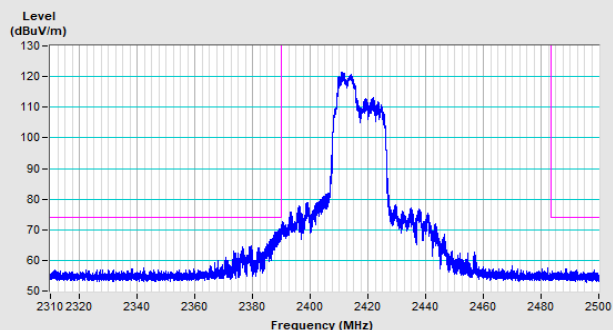


Vertical (Peak)

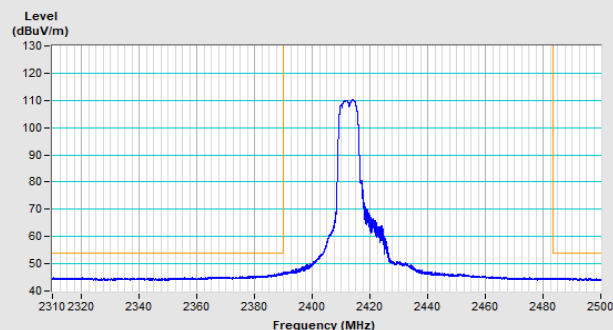


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 10

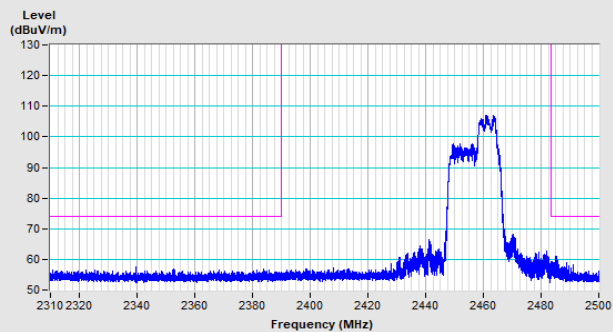


Horizontal (Peak)

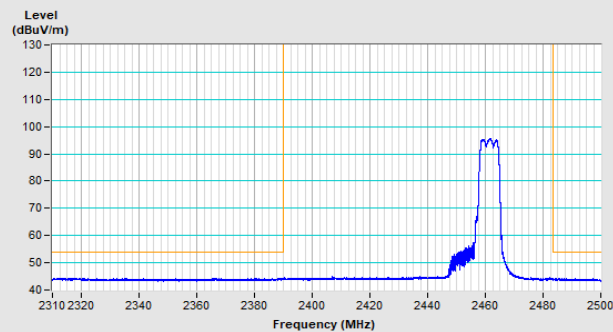

Horizontal (Average)

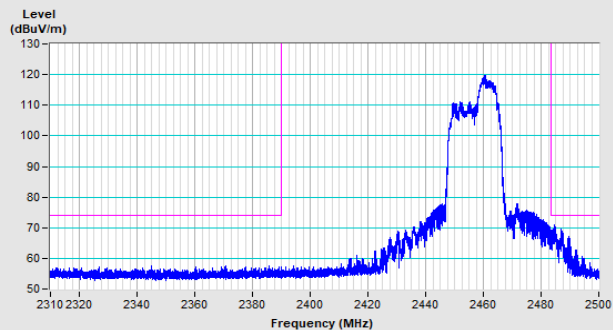


Vertical (Peak)

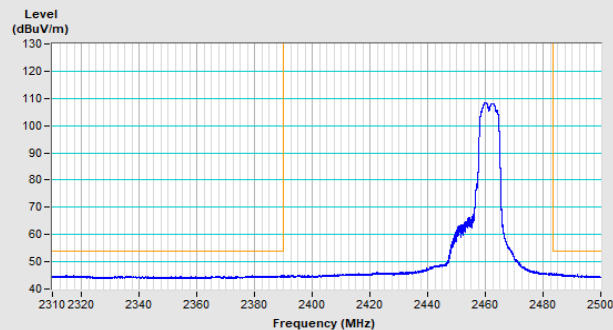


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 11

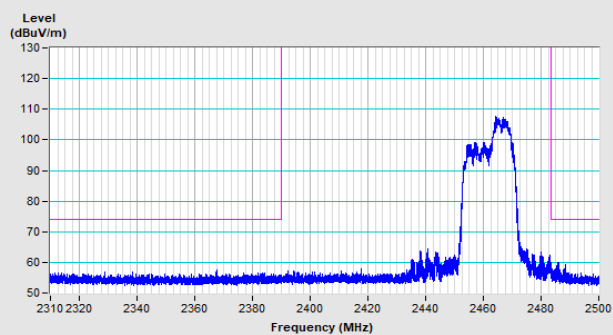


Horizontal (Peak)

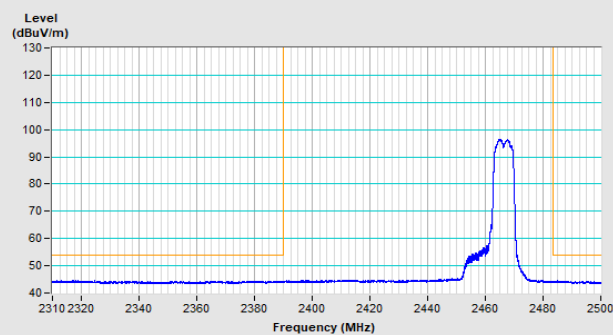

Horizontal (Average)

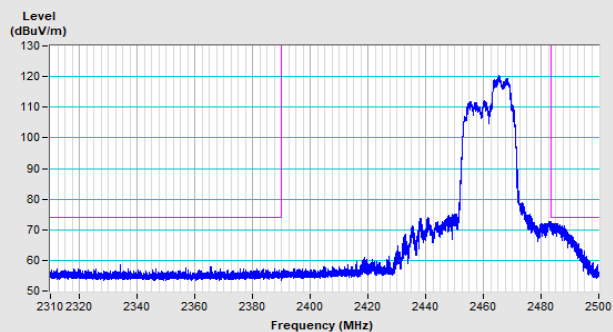


Vertical (Peak)

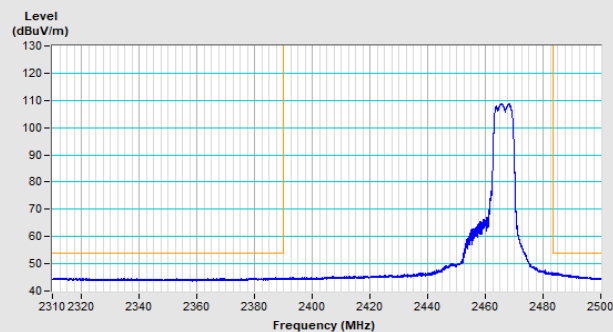


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 12

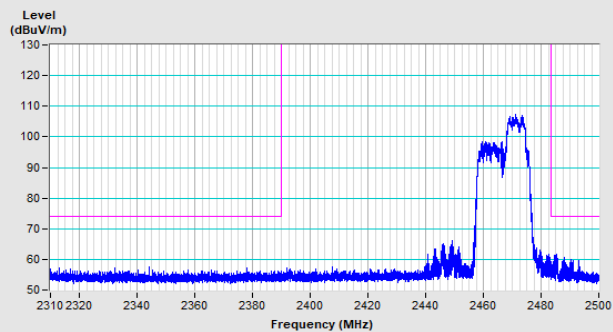


Horizontal (Peak)

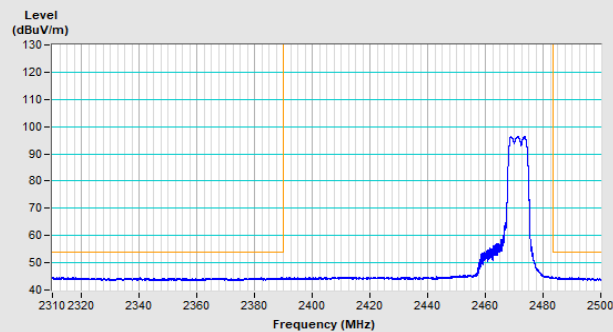

Horizontal (Average)

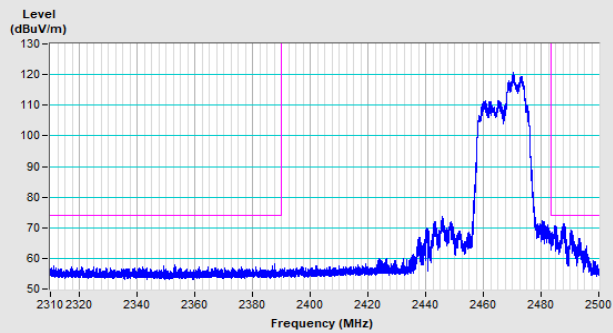


Vertical (Peak)

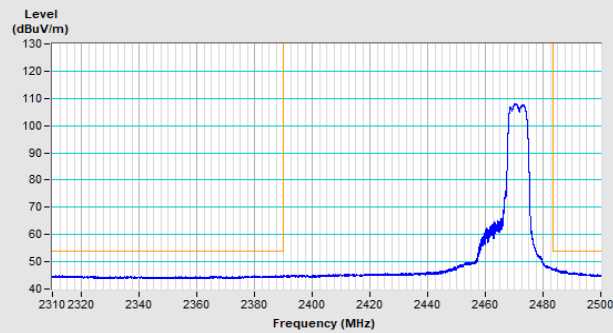


Vertical (Average)


802.11be (EHT20) 52+26-tone MRU Channel 13

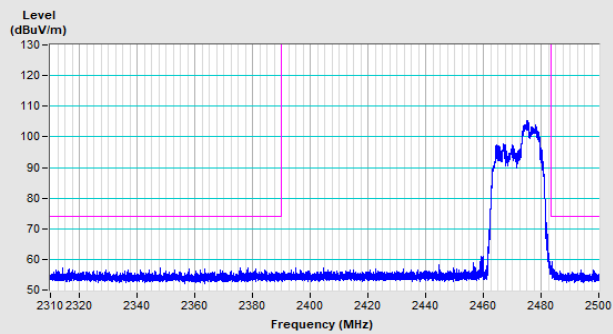


Horizontal (Peak)

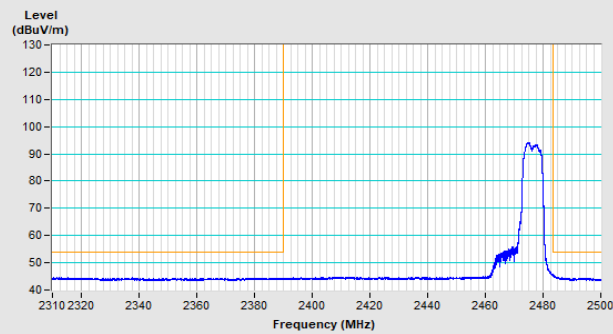

Horizontal (Average)

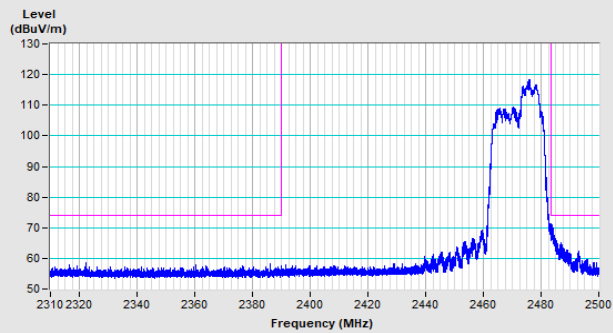


Vertical (Peak)

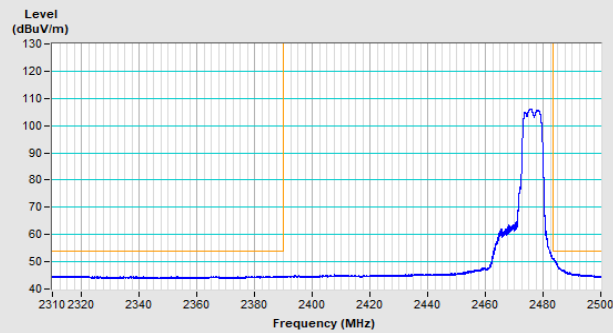


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106+26-tone MRU Channel 1

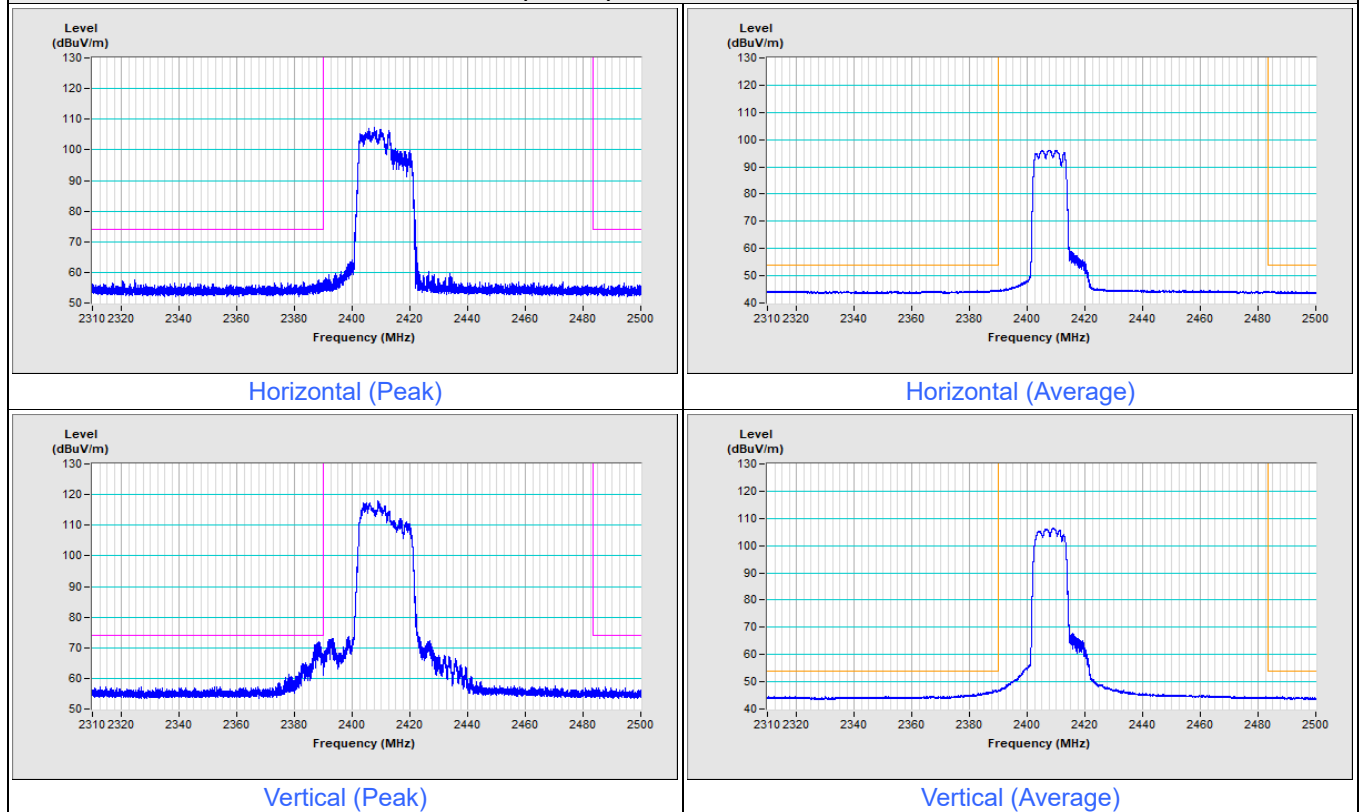


802.11be (EHT20) 106+26-tone MRU Channel 2

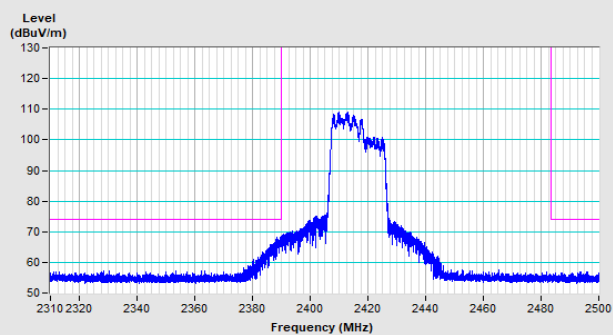


Horizontal (Peak)

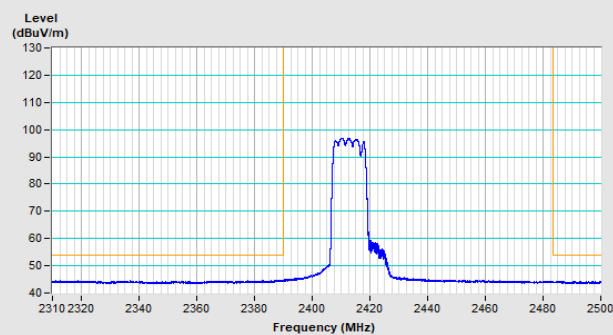

Horizontal (Average)

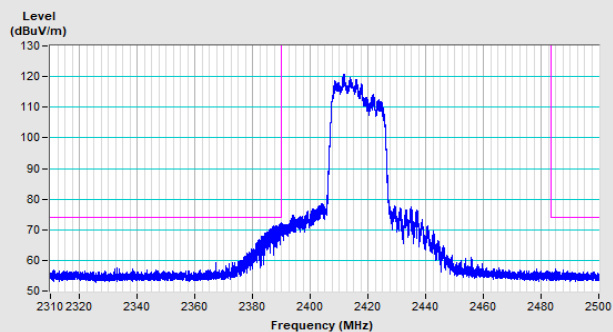


Vertical (Peak)

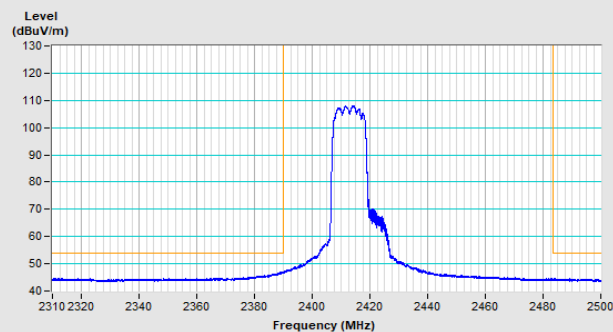


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 10

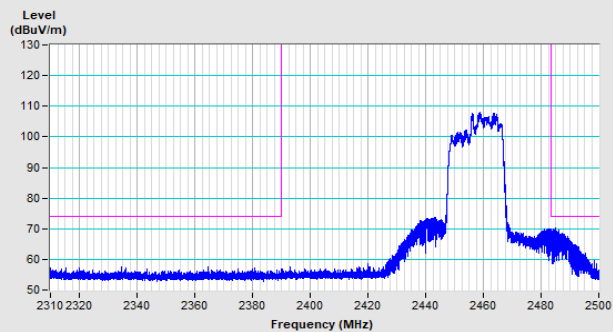


Horizontal (Peak)

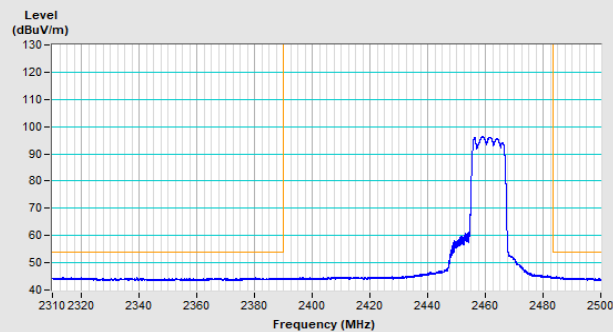

Horizontal (Average)

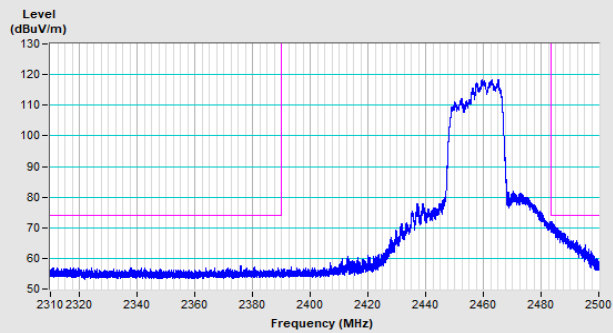


Vertical (Peak)

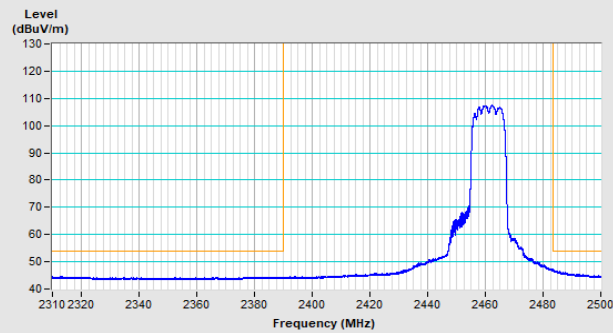


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 11

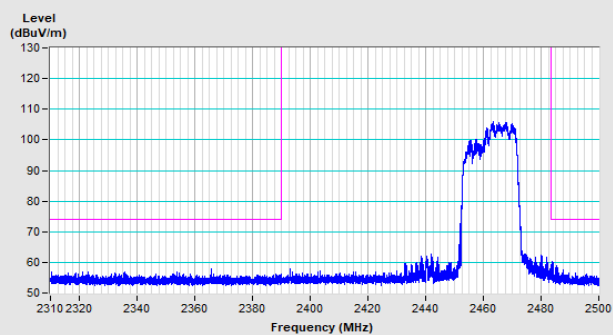


Horizontal (Peak)

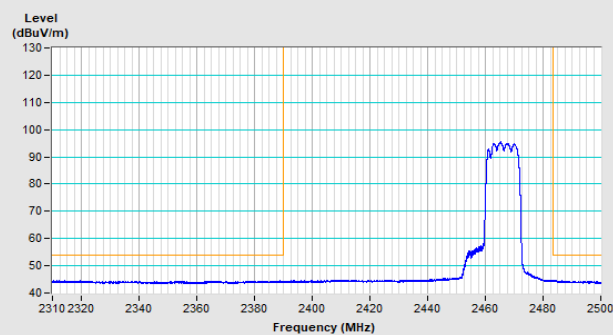

Horizontal (Average)

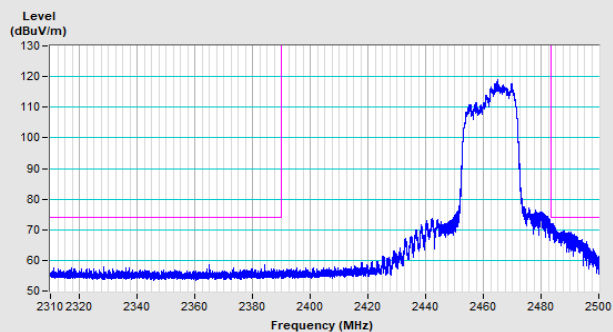


Vertical (Peak)

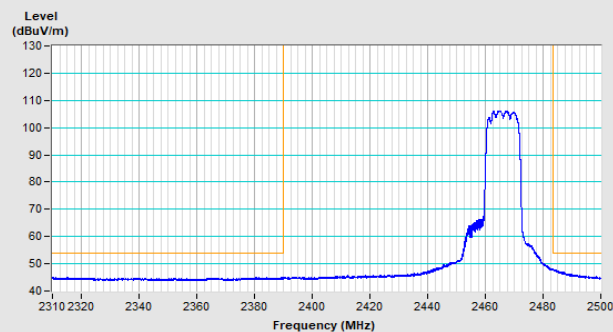


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 12

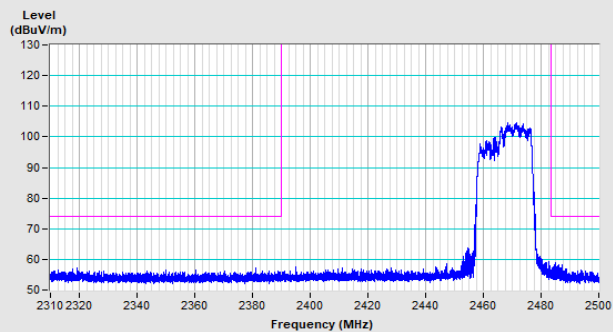


Horizontal (Peak)

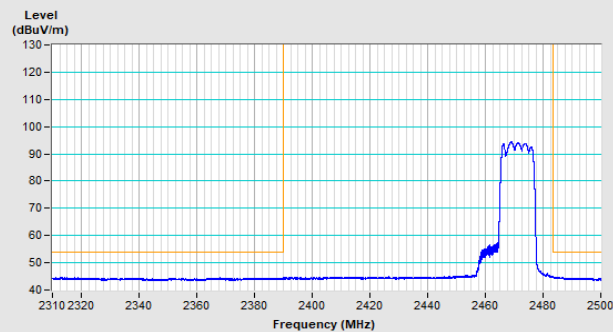

Horizontal (Average)

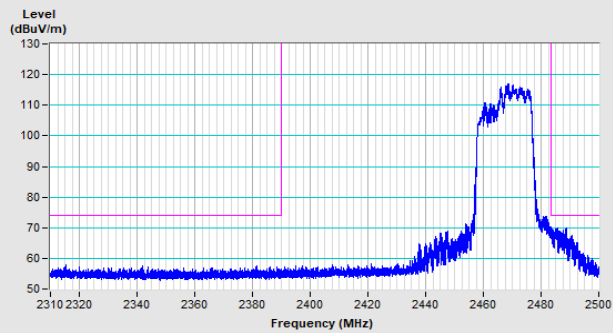


Vertical (Peak)

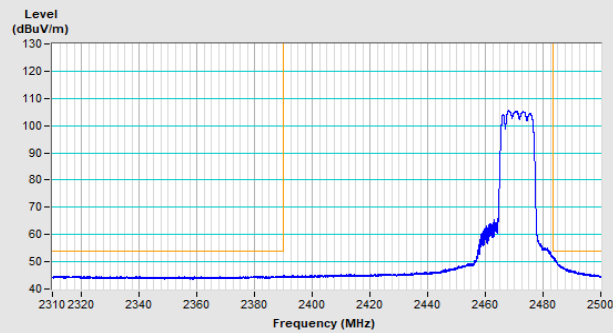


Vertical (Average)


802.11be (EHT20) 106+26-tone MRU Channel 13

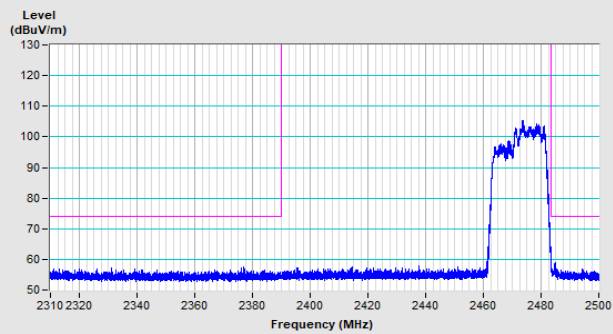


Horizontal (Peak)

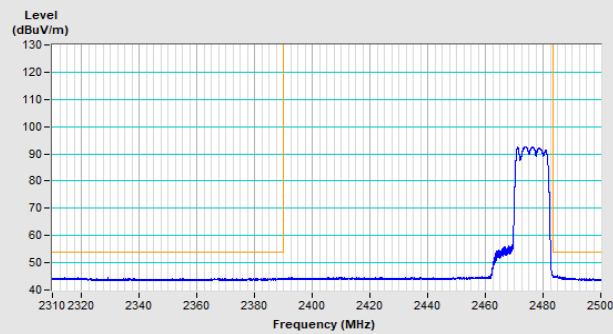

Horizontal (Average)

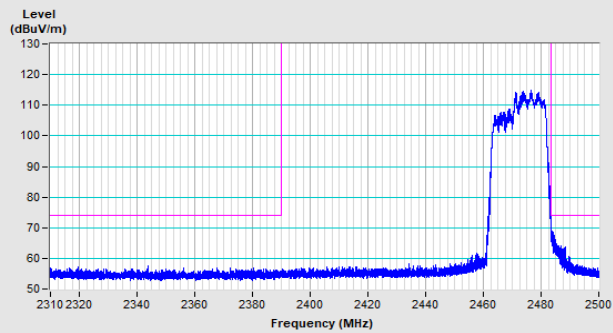


Vertical (Peak)

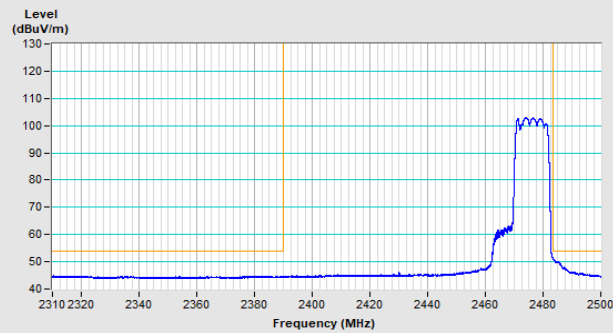

Vertical (Average)

Plot of Other Emission


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

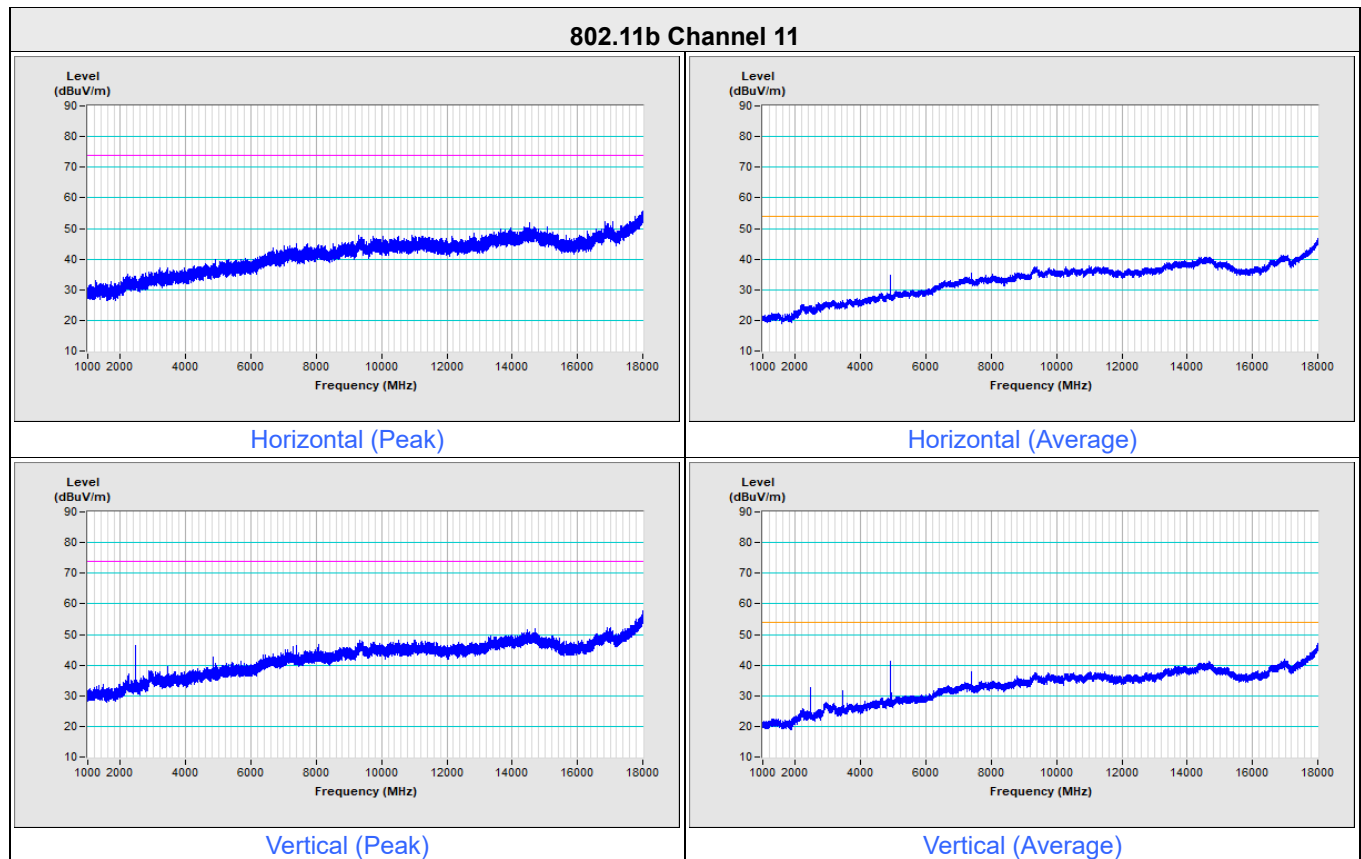

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

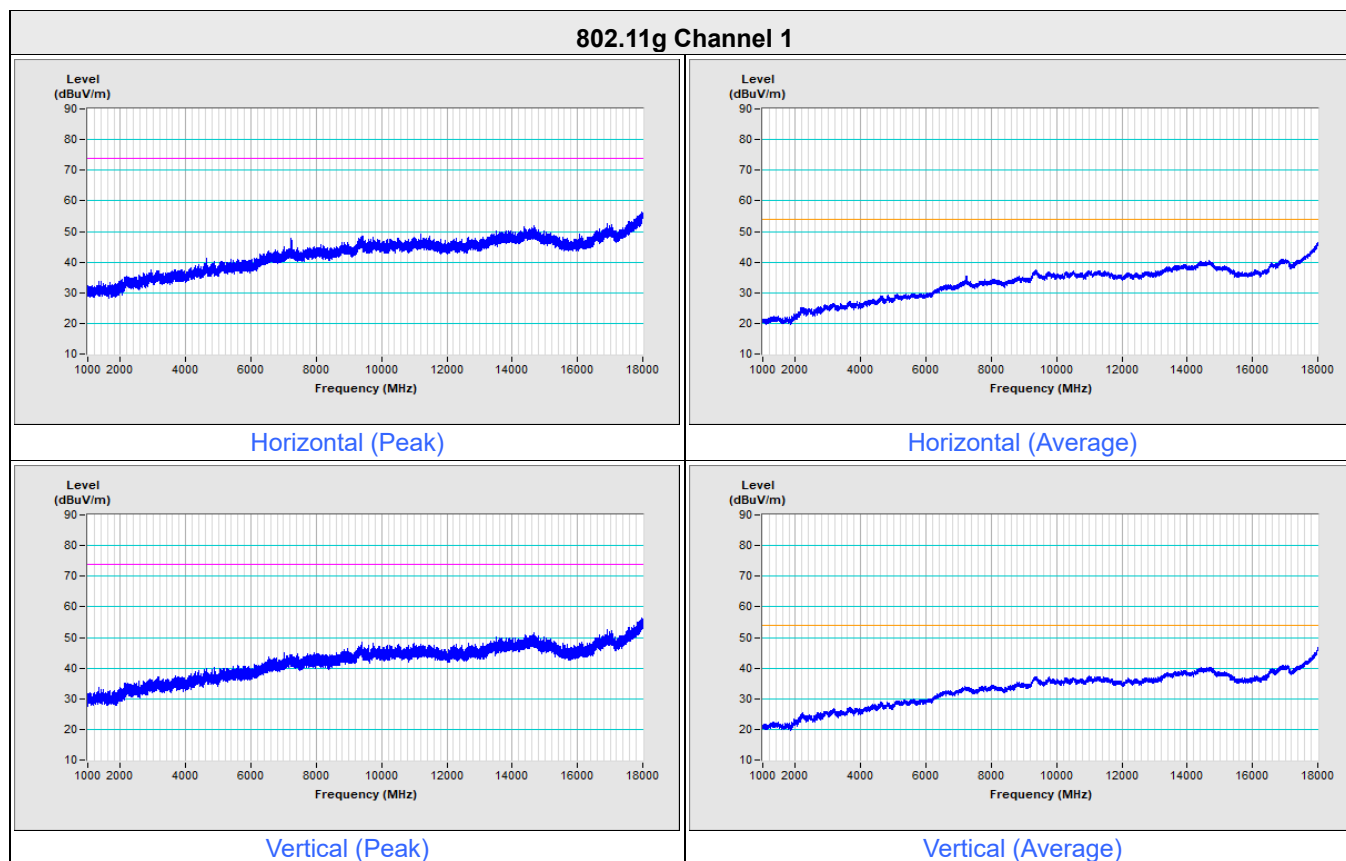

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.


Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

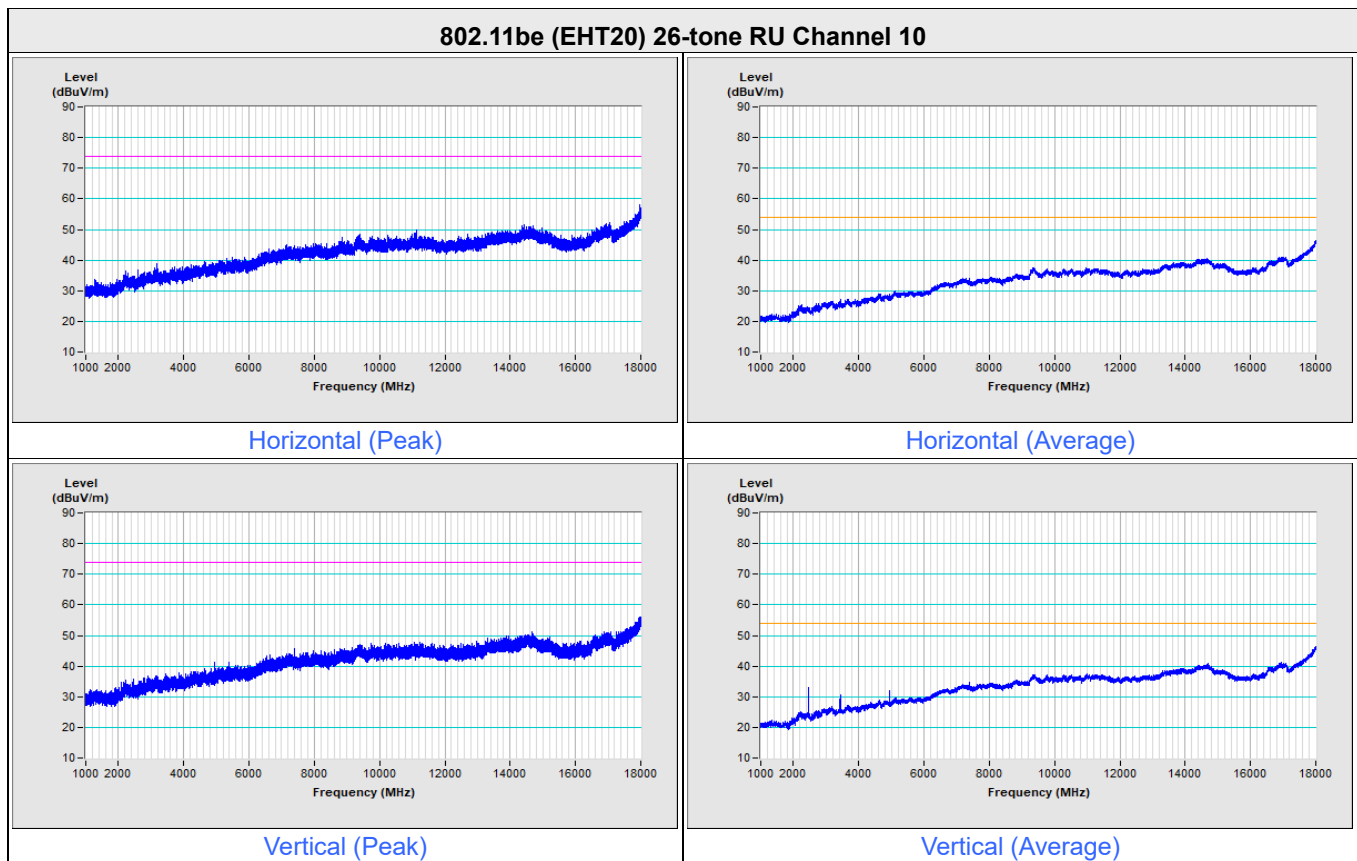

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

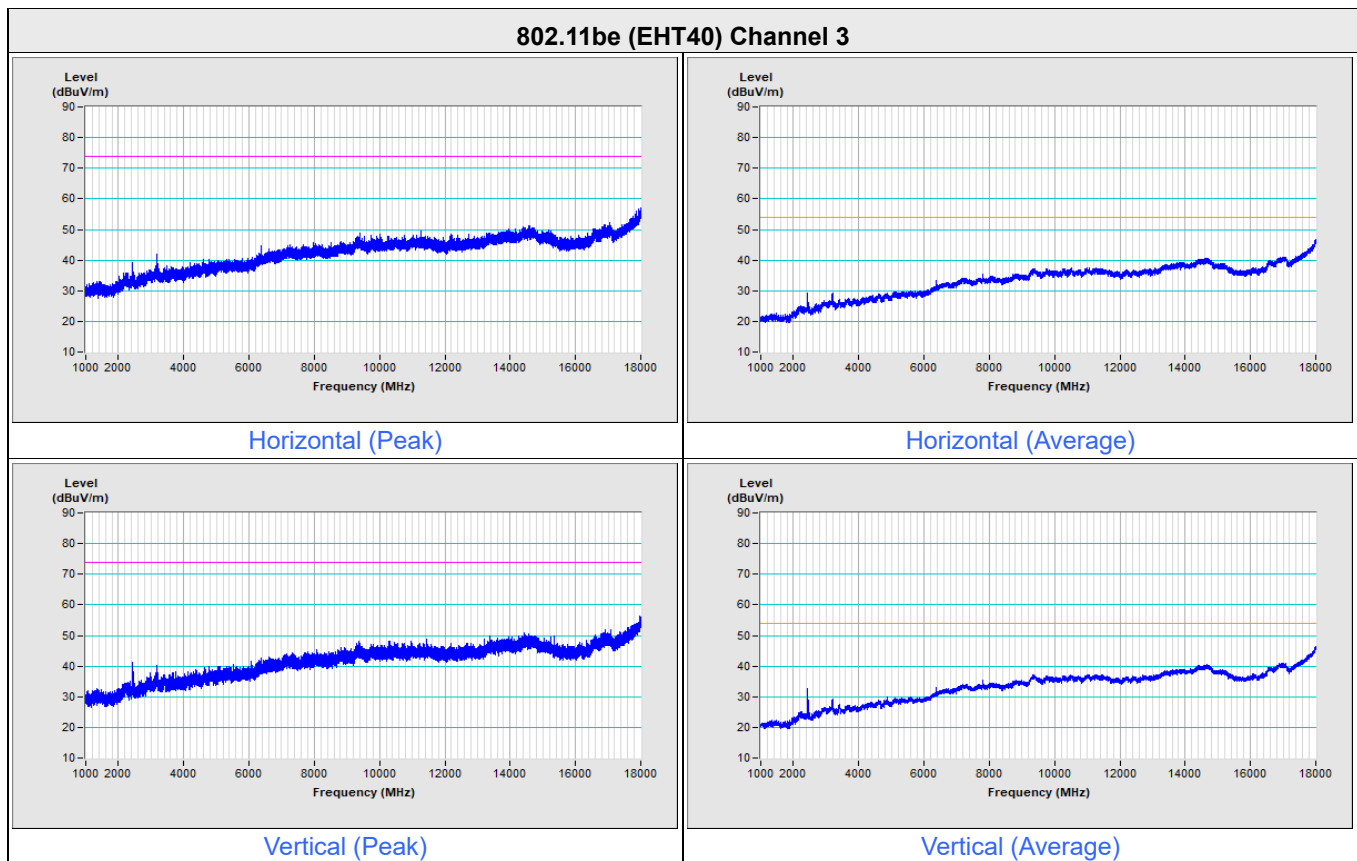

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 25 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---