

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	119.1 PK			2.74 H	148	75.4	43.7
2	*5745.00	110.2 AV			2.74 H	148	66.5	43.7
3	11490.00	59.4 PK	74.0	-14.6	2.03 H	310	47.1	12.3
4	11490.00	48.1 AV	54.0	-5.9	2.03 H	310	35.8	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	125.4 PK			1.11 V	312	81.7	43.7
2	*5745.00	116.5 AV			1.11 V	312	72.8	43.7
3	11490.00	60.6 PK	74.0	-13.4	1.44 V	298	48.3	12.3
4	11490.00	49.4 AV	54.0	-4.6	1.44 V	298	37.1	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.9 PK			2.71 H	141	75.9	44.0
2	*5785.00	111.3 AV			2.71 H	141	67.3	44.0
3	11570.00	59.4 PK	74.0	-14.6	2.02 H	316	46.8	12.6
4	11570.00	48.1 AV	54.0	-5.9	2.02 H	316	35.5	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	126.2 PK			1.51 V	314	82.2	44.0
2	*5785.00	117.6 AV			1.51 V	314	73.6	44.0
3	11570.00	60.7 PK	74.0	-13.3	1.41 V	281	48.1	12.6
4	11570.00	49.4 AV	54.0	-4.6	1.41 V	281	36.8	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	119.6 PK			2.75 H	146	75.4	44.2
2	*5825.00	112.6 AV			2.75 H	146	68.4	44.2
3	11650.00	59.1 PK	74.0	-14.9	2.06 H	315	46.7	12.4
4	11650.00	47.8 AV	54.0	-6.2	2.06 H	315	35.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	126.3 PK			1.13 V	314	82.1	44.2
2	*5825.00	119.2 AV			1.13 V	314	75.0	44.2
3	11650.00	60.2 PK	74.0	-13.8	1.46 V	279	47.8	12.4
4	11650.00	48.9 AV	54.0	-5.1	1.46 V	279	36.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.3 PK	74.0	-10.7	2.68 H	135	58.8	4.5
2	5150.00	45.0 AV	54.0	-9.0	2.68 H	135	40.5	4.5
3	*5180.00	116.2 PK			2.68 H	135	73.8	42.4
4	*5180.00	104.8 AV			2.68 H	135	62.4	42.4
5	#10360.00	58.2 PK	68.2	-10.0	1.97 H	306	46.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.26 V	313	60.9	4.5
2	5150.00	46.7 AV	54.0	-7.3	1.26 V	313	42.2	4.5
3	*5180.00	122.7 PK			1.26 V	313	80.3	42.4
4	*5180.00	111.2 AV			1.26 V	313	68.8	42.4
5	#10360.00	59.3 PK	68.2	-8.9	1.43 V	268	47.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.8 PK			2.66 H	142	76.3	42.5
2	*5200.00	108.6 AV			2.66 H	142	66.1	42.5
3	#10400.00	58.0 PK	68.2	-10.2	2.11 H	309	46.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	125.4 PK			1.06 V	322	82.9	42.5
2	*5200.00	115.1 AV			1.06 V	322	72.6	42.5
3	#10400.00	59.0 PK	68.2	-9.2	1.47 V	281	47.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.3 PK			2.73 H	141	76.7	42.6
2	*5240.00	108.9 AV			2.73 H	141	66.3	42.6
3	5350.00	56.2 PK	74.0	-17.8	2.73 H	141	51.9	4.3
4	5350.00	42.7 AV	54.0	-11.3	2.73 H	141	38.4	4.3
5	#10480.00	58.2 PK	68.2	-10.0	1.96 H	301	46.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	125.8 PK			1.26 V	324	83.2	42.6
2	*5240.00	115.3 AV			1.26 V	324	72.7	42.6
3	5350.00	57.2 PK	74.0	-16.8	1.26 V	324	52.9	4.3
4	5350.00	43.5 AV	54.0	-10.5	1.26 V	324	39.2	4.3
5	#10480.00	59.1 PK	68.2	-9.1	1.41 V	266	47.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	2.66 H	167	51.5	4.5
2	5150.00	42.5 AV	54.0	-11.5	2.66 H	167	38.0	4.5
3	*5260.00	119.0 PK			2.66 H	167	76.4	42.6
4	*5260.00	109.6 AV			2.66 H	167	67.0	42.6
5	#10520.00	58.1 PK	68.2	-10.1	2.12 H	305	46.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.34 V	325	52.4	4.5
2	5150.00	43.1 AV	54.0	-10.9	1.34 V	325	38.6	4.5
3	*5260.00	124.9 PK			1.34 V	325	82.3	42.6
4	*5260.00	114.6 AV			1.34 V	325	72.0	42.6
5	#10520.00	58.9 PK	68.2	-9.3	1.36 V	270	47.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.1 PK			2.67 H	148	76.5	42.6
2	*5300.00	109.6 AV			2.67 H	148	67.0	42.6
3	10600.00	57.4 PK	74.0	-16.6	2.00 H	307	46.4	11.0
4	10600.00	46.5 AV	54.0	-7.5	2.00 H	307	35.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	125.8 PK			1.06 V	311	83.2	42.6
2	*5300.00	115.1 AV			1.06 V	311	72.5	42.6
3	10600.00	59.0 PK	74.0	-15.0	1.49 V	261	48.0	11.0
4	10600.00	47.2 AV	54.0	-6.8	1.49 V	261	36.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.0 PK			2.70 H	162	74.5	42.5
2	*5320.00	107.0 AV			2.70 H	162	64.5	42.5
3	5350.00	61.6 PK	74.0	-12.4	2.70 H	162	57.3	4.3
4	5350.00	45.0 AV	54.0	-9.0	2.70 H	162	40.7	4.3
5	10640.00	57.5 PK	74.0	-16.5	2.00 H	305	46.5	11.0
6	10640.00	46.6 AV	54.0	-7.4	2.00 H	305	35.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	122.7 PK			1.33 V	321	80.2	42.5
2	*5320.00	111.5 AV			1.33 V	321	69.0	42.5
3	5350.00	65.3 PK	74.0	-8.7	1.33 V	321	61.0	4.3
4	5350.00	47.5 AV	54.0	-6.5	1.33 V	321	43.2	4.3
5	10640.00	58.4 PK	74.0	-15.6	1.33 V	265	47.4	11.0
6	10640.00	47.5 AV	54.0	-6.5	1.33 V	265	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.4 PK	74.0	-15.6	2.63 H	137	53.8	4.6
2	5460.00	43.3 AV	54.0	-10.7	2.63 H	137	38.7	4.6
3	#5470.00	58.9 PK	68.2	-9.3	2.63 H	137	54.3	4.6
4	*5500.00	114.3 PK			2.63 H	137	71.6	42.7
5	*5500.00	103.8 AV			2.63 H	137	61.1	42.7
6	11000.00	58.2 PK	74.0	-15.8	2.03 H	317	46.6	11.6
7	11000.00	47.0 AV	54.0	-7.0	2.03 H	317	35.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.2 PK	74.0	-9.8	1.10 V	317	59.6	4.6
2	5460.00	45.1 AV	54.0	-8.9	1.10 V	317	40.5	4.6
3	#5470.00	65.2 PK	68.2	-3.0	1.10 V	317	60.6	4.6
4	*5500.00	120.8 PK			1.10 V	317	78.1	42.7
5	*5500.00	110.2 AV			1.10 V	317	67.5	42.7
6	11000.00	59.2 PK	74.0	-14.8	1.46 V	287	47.6	11.6
7	11000.00	48.0 AV	54.0	-6.0	1.46 V	287	36.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	117.9 PK			2.72 H	134	74.9	43.0
2	*5600.00	108.3 AV			2.72 H	134	65.3	43.0
3	11200.00	58.6 PK	74.0	-15.4	2.02 H	297	46.8	11.8
4	11200.00	47.5 AV	54.0	-6.5	2.02 H	297	35.7	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.6 PK			1.14 V	319	81.6	43.0
2	*5600.00	115.0 AV			1.14 V	319	72.0	43.0
3	11200.00	59.6 PK	74.0	-14.4	1.44 V	292	47.8	11.8
4	11200.00	48.6 AV	54.0	-5.4	1.44 V	292	36.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.3 PK			2.69 H	136	69.4	43.9
2	*5700.00	102.0 AV			2.69 H	136	58.1	43.9
3	#5725.00	60.2 PK	68.2	-8.0	2.69 H	136	54.4	5.8
4	11400.00	59.0 PK	74.0	-15.0	2.08 H	312	46.8	12.2
5	11400.00	48.0 AV	54.0	-6.0	2.08 H	312	35.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	119.9 PK			1.48 V	315	76.0	43.9
2	*5700.00	108.7 AV			1.48 V	315	64.8	43.9
3	#5725.00	64.3 PK	68.2	-3.9	1.48 V	315	58.5	5.8
4	11400.00	60.3 PK	74.0	-13.7	1.49 V	286	48.1	12.2
5	11400.00	49.1 AV	54.0	-4.9	1.49 V	286	36.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.0 PK	68.2	-12.2	2.71 H	141	51.4	4.6
2	*5720.00	119.5 PK			2.71 H	141	75.7	43.8
3	*5720.00	109.3 AV			2.71 H	141	65.5	43.8
4	#5850.00	57.4 PK	68.2	-10.8	2.71 H	141	51.2	6.2
5	11440.00	59.1 PK	74.0	-14.9	2.08 H	303	46.9	12.2
6	11440.00	48.0 AV	54.0	-6.0	2.08 H	303	35.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.0 PK	68.2	-11.2	1.14 V	314	52.4	4.6
2	*5720.00	126.1 PK			1.14 V	314	82.3	43.8
3	*5720.00	115.8 AV			1.14 V	314	72.0	43.8
4	#5850.00	58.8 PK	68.2	-9.4	1.14 V	314	52.6	6.2
5	11440.00	60.4 PK	74.0	-13.6	1.47 V	283	48.2	12.2
6	11440.00	49.1 AV	54.0	-4.9	1.47 V	283	36.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	118.8 PK			2.71 H	144	75.1	43.7
2	*5745.00	108.6 AV			2.71 H	144	64.9	43.7
3	11490.00	59.1 PK	74.0	-14.9	2.09 H	317	46.8	12.3
4	11490.00	47.9 AV	54.0	-6.1	2.09 H	317	35.6	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	125.6 PK			1.09 V	313	81.9	43.7
2	*5745.00	115.3 AV			1.09 V	313	71.6	43.7
3	11490.00	60.3 PK	74.0	-13.7	1.48 V	287	48.0	12.3
4	11490.00	49.1 AV	54.0	-4.9	1.48 V	287	36.8	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.4 PK			2.69 H	148	75.4	44.0
2	*5785.00	109.7 AV			2.69 H	148	65.7	44.0
3	11570.00	59.2 PK	74.0	-14.8	2.07 H	308	46.6	12.6
4	11570.00	48.0 AV	54.0	-6.0	2.07 H	308	35.4	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	125.8 PK			1.49 V	314	81.8	44.0
2	*5785.00	116.2 AV			1.49 V	314	72.2	44.0
3	11570.00	60.7 PK	74.0	-13.3	1.42 V	287	48.1	12.6
4	11570.00	49.4 AV	54.0	-4.6	1.42 V	287	36.8	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	119.6 PK			2.79 H	142	75.4	44.2
2	*5825.00	110.0 AV			2.79 H	142	65.8	44.2
3	11650.00	58.9 PK	74.0	-15.1	2.03 H	312	46.5	12.4
4	11650.00	47.7 AV	54.0	-6.3	2.03 H	312	35.3	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	125.9 PK			1.14 V	312	81.7	44.2
2	*5825.00	116.4 AV			1.14 V	312	72.2	44.2
3	11650.00	60.1 PK	74.0	-13.9	1.52 V	281	47.7	12.4
4	11650.00	48.8 AV	54.0	-5.2	1.52 V	281	36.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	2.71 H	126	59.3	4.5
2	5150.00	45.1 AV	54.0	-8.9	2.71 H	126	40.6	4.5
3	*5180.00	114.7 PK			2.71 H	126	72.3	42.4
4	*5180.00	102.5 AV			2.71 H	126	60.1	42.4
5	#10360.00	58.1 PK	68.2	-10.1	2.05 H	303	46.5	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.25 V	312	61.2	4.5
2	5150.00	47.0 AV	54.0	-7.0	1.25 V	312	42.5	4.5
3	*5180.00	120.9 PK			1.25 V	312	78.5	42.4
4	*5180.00	108.6 AV			1.25 V	312	66.2	42.4
5	#10360.00	59.1 PK	68.2	-9.1	1.53 V	279	47.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	116.7 PK			2.67 H	135	74.2	42.5
2	*5200.00	106.4 AV			2.67 H	135	63.9	42.5
3	#10400.00	57.9 PK	68.2	-10.3	1.98 H	307	46.6	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.3 PK			1.04 V	313	80.8	42.5
2	*5200.00	113.0 AV			1.04 V	313	70.5	42.5
3	#10400.00	58.9 PK	68.2	-9.3	1.46 V	286	47.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.0 PK			2.77 H	128	74.4	42.6
2	*5240.00	106.4 AV			2.77 H	128	63.8	42.6
3	5350.00	55.9 PK	74.0	-18.1	2.77 H	128	51.6	4.3
4	5350.00	44.0 AV	54.0	-10.0	2.77 H	128	39.7	4.3
5	#10480.00	57.9 PK	68.2	-10.3	2.02 H	317	46.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.5 PK			1.24 V	324	80.9	42.6
2	*5240.00	113.2 AV			1.24 V	324	70.6	42.6
3	5350.00	56.6 PK	74.0	-17.4	1.24 V	324	52.3	4.3
4	5350.00	45.0 AV	54.0	-9.0	1.24 V	324	40.7	4.3
5	#10480.00	59.0 PK	68.2	-9.2	1.59 V	282	47.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	2.50 H	167	51.0	4.5
2	5150.00	42.4 AV	54.0	-11.6	2.50 H	167	37.9	4.5
3	*5260.00	116.9 PK			2.50 H	167	74.3	42.6
4	*5260.00	106.8 AV			2.50 H	167	64.2	42.6
5	#10520.00	57.9 PK	68.2	-10.3	2.17 H	306	46.6	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.5 PK	74.0	-17.5	1.05 V	312	52.0	4.5
2	5150.00	43.1 AV	54.0	-10.9	1.05 V	312	38.6	4.5
3	*5260.00	123.5 PK			1.05 V	312	80.9	42.6
4	*5260.00	112.1 AV			1.05 V	312	69.5	42.6
5	#10520.00	58.9 PK	68.2	-9.3	1.45 V	266	47.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.8 PK			2.62 H	138	74.2	42.6
2	*5300.00	106.6 AV			2.62 H	138	64.0	42.6
3	10600.00	57.6 PK	74.0	-16.4	2.00 H	316	46.6	11.0
4	10600.00	46.6 AV	54.0	-7.4	2.00 H	316	35.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.2 PK			1.21 V	309	80.6	42.6
2	*5300.00	113.2 AV			1.21 V	309	70.6	42.6
3	10600.00	58.5 PK	74.0	-15.5	1.36 V	261	47.5	11.0
4	10600.00	47.5 AV	54.0	-6.5	1.36 V	261	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.5 PK			2.61 H	165	74.0	42.5
2	*5320.00	104.0 AV			2.61 H	165	61.5	42.5
3	5350.00	60.6 PK	74.0	-13.4	2.61 H	165	56.3	4.3
4	5350.00	44.7 AV	54.0	-9.3	2.61 H	165	40.4	4.3
5	10640.00	57.6 PK	74.0	-16.4	2.03 H	305	46.6	11.0
6	10640.00	46.5 AV	54.0	-7.5	2.03 H	305	35.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.8 PK			1.21 V	321	79.3	42.5
2	*5320.00	109.2 AV			1.21 V	321	66.7	42.5
3	5350.00	66.5 PK	74.0	-7.5	1.21 V	321	62.2	4.3
4	5350.00	47.8 AV	54.0	-6.2	1.21 V	321	43.5	4.3
5	10640.00	58.6 PK	74.0	-15.4	1.33 V	262	47.6	11.0
6	10640.00	47.5 AV	54.0	-6.5	1.33 V	262	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.3 PK	74.0	-15.7	2.68 H	133	53.7	4.6
2	5460.00	43.4 AV	54.0	-10.6	2.68 H	133	38.8	4.6
3	#5470.00	59.2 PK	68.2	-9.0	2.68 H	133	54.6	4.6
4	*5500.00	113.8 PK			2.68 H	133	71.1	42.7
5	*5500.00	101.5 AV			2.68 H	133	58.8	42.7
6	11000.00	58.1 PK	74.0	-15.9	1.97 H	306	46.5	11.6
7	11000.00	47.0 AV	54.0	-7.0	1.97 H	306	35.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.8 PK	74.0	-10.2	1.06 V	320	59.2	4.6
2	5460.00	45.8 AV	54.0	-8.2	1.06 V	320	41.2	4.6
3	#5470.00	64.9 PK	68.2	-3.3	1.06 V	320	60.3	4.6
4	*5500.00	120.3 PK			1.06 V	320	77.6	42.7
5	*5500.00	107.8 AV			1.06 V	320	65.1	42.7
6	11000.00	59.1 PK	74.0	-14.9	1.42 V	287	47.5	11.6
7	11000.00	48.0 AV	54.0	-6.0	1.42 V	287	36.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	117.4 PK			2.74 H	142	74.4	43.0
2	*5600.00	106.2 AV			2.74 H	142	63.2	43.0
3	11200.00	58.3 PK	74.0	-15.7	2.12 H	304	46.5	11.8
4	11200.00	47.1 AV	54.0	-6.9	2.12 H	304	35.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.3 PK			1.21 V	317	81.3	43.0
2	*5600.00	112.8 AV			1.21 V	317	69.8	43.0
3	11200.00	59.5 PK	74.0	-14.5	1.41 V	295	47.7	11.8
4	11200.00	48.5 AV	54.0	-5.5	1.41 V	295	36.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.0 PK			2.70 H	142	68.1	43.9
2	*5700.00	100.3 AV			2.70 H	142	56.4	43.9
3	#5725.00	60.4 PK	68.2	-7.8	2.70 H	142	54.6	5.8
4	11400.00	58.9 PK	74.0	-15.1	2.03 H	311	46.7	12.2
5	11400.00	47.7 AV	54.0	-6.3	2.03 H	311	35.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.0 PK			1.47 V	318	74.1	43.9
2	*5700.00	106.8 AV			1.47 V	318	62.9	43.9
3	#5725.00	65.2 PK	68.2	-3.0	1.47 V	318	59.4	5.8
4	11400.00	60.0 PK	74.0	-14.0	1.46 V	294	47.8	12.2
5	11400.00	48.8 AV	54.0	-5.2	1.46 V	294	36.6	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.2 PK	68.2	-12.0	2.63 H	134	51.6	4.6
2	*5720.00	117.5 PK			2.63 H	134	73.7	43.8
3	*5720.00	106.9 AV			2.63 H	134	63.1	43.8
4	#5850.00	57.4 PK	68.2	-10.8	2.63 H	134	51.2	6.2
5	11440.00	59.0 PK	74.0	-15.0	2.13 H	300	46.8	12.2
6	11440.00	47.8 AV	54.0	-6.2	2.13 H	300	35.6	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.0 PK	68.2	-11.2	1.12 V	315	52.4	4.6
2	*5720.00	124.1 PK			1.12 V	315	80.3	43.8
3	*5720.00	113.6 AV			1.12 V	315	69.8	43.8
4	#5850.00	58.7 PK	68.2	-9.5	1.12 V	315	52.5	6.2
5	11440.00	60.2 PK	74.0	-13.8	1.45 V	299	48.0	12.2
6	11440.00	49.0 AV	54.0	-5.0	1.45 V	299	36.8	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.1 PK			2.78 H	142	73.4	43.7
2	*5745.00	106.5 AV			2.78 H	142	62.8	43.7
3	11490.00	59.0 PK	74.0	-15.0	2.13 H	302	46.7	12.3
4	11490.00	47.7 AV	54.0	-6.3	2.13 H	302	35.4	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	124.0 PK			1.08 V	316	80.3	43.7
2	*5745.00	113.2 AV			1.08 V	316	69.5	43.7
3	11490.00	60.1 PK	74.0	-13.9	1.45 V	289	47.8	12.3
4	11490.00	48.9 AV	54.0	-5.1	1.45 V	289	36.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.6 PK			2.75 H	147	75.6	44.0
2	*5785.00	107.7 AV			2.75 H	147	63.7	44.0
3	11570.00	59.1 PK	74.0	-14.9	2.03 H	311	46.5	12.6
4	11570.00	48.0 AV	54.0	-6.0	2.03 H	311	35.4	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	125.6 PK			1.52 V	314	81.6	44.0
2	*5785.00	113.8 AV			1.52 V	314	69.8	44.0
3	11570.00	60.4 PK	74.0	-13.6	1.44 V	297	47.8	12.6
4	11570.00	49.4 AV	54.0	-4.6	1.44 V	297	36.8	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	118.3 PK			2.78 H	132	74.1	44.2
2	*5825.00	107.4 AV			2.78 H	132	63.2	44.2
3	11650.00	58.8 PK	74.0	-15.2	2.07 H	315	46.4	12.4
4	11650.00	47.6 AV	54.0	-6.4	2.07 H	315	35.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	124.7 PK			1.11 V	315	80.5	44.2
2	*5825.00	113.8 AV			1.11 V	315	69.6	44.2
3	11650.00	60.0 PK	74.0	-14.0	1.49 V	288	47.6	12.4
4	11650.00	48.8 AV	54.0	-5.2	1.49 V	288	36.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.6 PK			3.48 H	133	73.0	42.6
2	*5240.00	105.6 AV			3.48 H	133	63.0	42.6
3	5350.00	54.8 PK	74.0	-19.2	3.48 H	133	50.5	4.3
4	5350.00	41.6 AV	54.0	-12.4	3.48 H	133	37.3	4.3
5	#10480.00	58.1 PK	68.2	-10.1	2.06 H	301	46.7	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.2 PK			1.00 V	313	80.6	42.6
2	*5240.00	112.7 AV			1.00 V	313	70.1	42.6
3	5350.00	56.0 PK	74.0	-18.0	1.00 V	313	51.7	4.3
4	5350.00	44.1 AV	54.0	-9.9	1.00 V	313	39.8	4.3
5	#10480.00	58.9 PK	68.2	-9.3	1.44 V	271	47.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.0 PK			3.07 H	133	73.4	42.6
2	*5300.00	106.1 AV			3.07 H	133	63.5	42.6
3	10600.00	57.7 PK	74.0	-16.3	2.07 H	303	46.7	11.0
4	10600.00	46.6 AV	54.0	-7.4	2.07 H	303	35.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.7 PK			1.32 V	302	81.1	42.6
2	*5300.00	113.6 AV			1.32 V	302	71.0	42.6
3	10600.00	58.8 PK	74.0	-15.2	1.42 V	277	47.8	11.0
4	10600.00	47.5 AV	54.0	-6.5	1.42 V	277	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	116.8 PK			2.93 H	134	73.8	43.0
2	*5600.00	106.3 AV			2.93 H	134	63.3	43.0
3	11200.00	58.8 PK	74.0	-15.2	2.13 H	303	47.0	11.8
4	11200.00	47.5 AV	54.0	-6.5	2.13 H	303	35.7	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.5 PK			1.38 V	321	81.5	43.0
2	*5600.00	114.3 AV			1.38 V	321	71.3	43.0
3	11200.00	59.4 PK	74.0	-14.6	1.39 V	282	47.6	11.8
4	11200.00	48.4 AV	54.0	-5.6	1.39 V	282	36.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	120.1 PK			2.68 H	169	76.1	44.0
2	*5785.00	109.7 AV			2.68 H	169	65.7	44.0
3	11570.00	59.6 PK	74.0	-14.4	2.06 H	311	47.0	12.6
4	11570.00	47.6 AV	54.0	-6.4	2.06 H	311	35.0	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	125.2 PK			1.67 V	322	81.2	44.0
2	*5785.00	115.1 AV			1.67 V	322	71.1	44.0
3	11570.00	60.7 PK	74.0	-13.3	1.42 V	277	48.1	12.6
4	11570.00	48.6 AV	54.0	-5.4	1.42 V	277	36.0	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.4 PK			2.89 H	128	71.8	42.6
2	*5240.00	104.6 AV			2.89 H	128	62.0	42.6
3	5350.00	54.9 PK	74.0	-19.1	2.89 H	128	50.6	4.3
4	5350.00	41.8 AV	54.0	-12.2	2.89 H	128	37.5	4.3
5	#10480.00	58.0 PK	68.2	-10.2	2.00 H	306	46.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	122.4 PK			1.01 V	311	79.8	42.6
2	*5240.00	111.8 AV			1.01 V	311	69.2	42.6
3	5350.00	56.2 PK	74.0	-17.8	1.01 V	311	51.9	4.3
4	5350.00	43.8 AV	54.0	-10.2	1.01 V	311	39.5	4.3
5	#10480.00	58.9 PK	68.2	-9.3	1.44 V	267	47.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.9 PK			3.00 H	139	72.3	42.6
2	*5300.00	105.1 AV			3.00 H	139	62.5	42.6
3	10600.00	57.6 PK	74.0	-16.4	2.00 H	306	46.6	11.0
4	10600.00	46.5 AV	54.0	-7.5	2.00 H	306	35.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.7 PK			1.22 V	319	80.1	42.6
2	*5300.00	112.5 AV			1.22 V	319	69.9	42.6
3	10600.00	58.8 PK	74.0	-15.2	1.42 V	271	47.8	11.0
4	10600.00	47.6 AV	54.0	-6.4	1.42 V	271	36.6	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	114.8 PK			2.89 H	141	71.8	43.0
2	*5600.00	105.0 AV			2.89 H	141	62.0	43.0
3	11200.00	58.6 PK	74.0	-15.4	2.17 H	310	46.8	11.8
4	11200.00	47.5 AV	54.0	-6.5	2.17 H	310	35.7	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	121.3 PK			1.04 V	314	78.3	43.0
2	*5600.00	112.5 AV			1.04 V	314	69.5	43.0
3	11200.00	59.6 PK	74.0	-14.4	1.33 V	282	47.8	11.8
4	11200.00	48.2 AV	54.0	-5.8	1.33 V	282	36.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	117.9 PK			2.69 H	168	73.9	44.0
2	*5785.00	107.1 AV			2.69 H	168	63.1	44.0
3	11570.00	59.2 PK	74.0	-14.8	2.00 H	318	46.6	12.6
4	11570.00	47.2 AV	54.0	-6.8	2.00 H	318	34.6	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	123.0 PK			1.25 V	312	79.0	44.0
2	*5785.00	111.5 AV			1.25 V	312	67.5	44.0
3	11570.00	60.8 PK	74.0	-13.2	1.44 V	272	48.2	12.6
4	11570.00	48.4 AV	54.0	-5.6	1.44 V	272	35.8	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.0 PK	74.0	-9.0	2.60 H	129	60.5	4.5
2	5150.00	46.3 AV	54.0	-7.7	2.60 H	129	41.8	4.5
3	*5210.00	103.3 PK			2.60 H	129	60.8	42.5
4	*5210.00	92.0 AV			2.60 H	129	49.5	42.5
5	#10420.00	57.6 PK	68.2	-10.6	2.12 H	315	46.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.1 PK	74.0	-2.9	1.00 V	313	66.6	4.5
2	5150.00	52.5 AV	54.0	-1.5	1.00 V	313	48.0	4.5
3	*5210.00	110.7 PK			1.00 V	313	68.2	42.5
4	*5210.00	100.0 AV			1.00 V	313	57.5	42.5
5	#10420.00	58.7 PK	68.2	-9.5	1.33 V	262	47.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	103.7 PK			2.66 H	165	61.1	42.6
2	*5290.00	92.4 AV			2.66 H	165	49.8	42.6
3	5350.00	63.8 PK	74.0	-10.2	2.66 H	165	59.5	4.3
4	5350.00	46.3 AV	54.0	-7.7	2.66 H	165	42.0	4.3
5	#10580.00	57.6 PK	68.2	-10.6	2.09 H	32	46.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	110.1 PK			1.17 V	319	67.5	42.6
2	*5290.00	97.6 AV			1.17 V	319	55.0	42.6
3	5350.00	70.5 PK	74.0	-3.5	1.17 V	312	66.2	4.3
4	5350.00	52.1 AV	54.0	-1.9	1.17 V	312	47.8	4.3
5	#10580.00	58.4 PK	68.2	-9.8	1.45 V	263	47.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.7 PK	68.2	-12.5	2.45 H	79	51.1	4.6
2	*5690.00	111.3 PK			2.45 H	79	67.5	43.8
3	*5690.00	99.8 AV			2.45 H	79	56.0	43.8
4	#5850.00	62.4 PK	68.2	-5.8	2.45 H	79	56.2	6.2
5	11380.00	58.1 PK	74.0	-15.9	2.10 H	300	46.1	12.0
6	11380.00	47.2 AV	54.0	-6.8	2.10 H	300	35.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.1 PK	68.2	-7.1	1.12 V	315	56.5	4.6
2	*5690.00	116.0 PK			1.12 V	315	72.2	43.8
3	*5690.00	104.3 AV			1.12 V	315	60.5	43.8
4	#5850.00	66.7 PK	68.2	-1.5	1.12 V	315	60.5	6.2
5	11380.00	59.5 PK	74.0	-14.5	1.33 V	277	47.5	12.0
6	11380.00	48.0 AV	54.0	-6.0	1.33 V	277	36.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	107.2 PK			2.64 H	111	63.2	44.0
2	*5775.00	96.0 AV			2.64 H	111	52.0	44.0
3	11550.00	58.9 PK	74.0	-15.1	2.03 H	311	46.5	12.4
4	11550.00	46.8 AV	54.0	-7.2	2.03 H	311	34.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	112.5 PK			1.09 V	314	68.5	44.0
2	*5775.00	101.0 AV			1.09 V	314	57.0	44.0
3	11550.00	59.7 PK	74.0	-14.3	1.42 V	300	47.3	12.4
4	11550.00	47.2 AV	54.0	-6.8	1.42 V	300	34.8	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	2.73 H	138	58.5	4.5
2	5150.00	46.0 AV	54.0	-8.0	2.73 H	138	41.5	4.5
3	*5250.00	100.4 PK			2.73 H	138	57.8	42.6
4	*5250.00	87.6 AV			2.73 H	138	45.0	42.6
5	5350.00	63.5 PK	74.0	-10.5	2.73 H	138	59.2	4.3
6	5350.00	47.1 AV	54.0	-6.9	2.73 H	138	42.8	4.3
7	#10500.00	57.4 PK	68.2	-10.8	2.01 H	307	46.0	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	1.17 V	311	63.4	4.5
2	5150.00	50.6 AV	54.0	-3.4	1.17 V	311	46.1	4.5
3	*5250.00	106.8 PK			1.17 V	311	64.2	42.6
4	*5250.00	94.3 AV			1.17 V	311	51.7	42.6
5	5350.00	68.6 PK	74.0	-5.4	1.17 V	311	64.3	4.3
6	5350.00	52.4 AV	54.0	-1.6	1.17 V	311	48.1	4.3
7	#10500.00	58.3 PK	68.2	-9.9	1.42 V	287	46.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.9 PK	74.0	-13.1	2.69 H	135	56.3	4.6
2	5460.00	44.9 AV	54.0	-9.1	2.69 H	135	40.3	4.6
3	#5470.00	61.8 PK	68.2	-6.4	2.69 H	135	57.2	4.6
4	*5570.00	98.9 PK			2.69 H	135	56.2	42.7
5	*5570.00	86.5 AV			2.69 H	135	43.8	42.7
6	#5725.00	59.7 PK	68.2	-8.5	2.69 H	135	53.9	5.8
7	11140.00	57.7 PK	74.0	-16.3	2.08 H	312	45.9	11.8
8	11140.00	46.6 AV	54.0	-7.4	2.08 H	312	34.8	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.2 PK	74.0	-8.8	1.00 V	318	60.6	4.6
2	5460.00	48.7 AV	54.0	-5.3	1.00 V	318	44.1	4.6
3	#5470.00	66.4 PK	68.2	-1.8	1.00 V	318	61.8	4.6
4	*5570.00	105.4 PK			1.00 V	318	62.7	42.7
5	*5570.00	93.0 AV			1.00 V	318	50.3	42.7
6	#5725.00	63.1 PK	68.2	-5.1	1.00 V	318	57.3	5.8
7	11140.00	58.8 PK	74.0	-15.2	1.48 V	282	47.0	11.8
8	11140.00	47.6 AV	54.0	-6.4	1.48 V	282	35.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	2.67 H	137	60.9	4.5
2	5150.00	47.4 AV	54.0	-6.6	2.67 H	137	42.9	4.5
3	*5250.00	101.3 PK			2.67 H	137	58.7	42.6
4	*5250.00	88.2 AV			2.67 H	137	45.6	42.6
5	5350.00	60.7 PK	74.0	-13.3	2.67 H	137	56.4	4.3
6	5350.00	45.5 AV	54.0	-8.5	2.67 H	137	41.2	4.3
7	#10500.00	57.7 PK	68.2	-10.5	2.13 H	305	46.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.9 PK	74.0	-3.1	1.00 V	314	66.4	4.5
2	5150.00	52.3 AV	54.0	-1.7	1.00 V	314	47.8	4.5
3	*5250.00	108.0 PK			1.00 V	314	65.4	42.6
4	*5250.00	94.7 AV			1.00 V	314	52.1	42.6
5	5350.00	68.9 PK	74.0	-5.1	1.00 V	314	64.6	4.3
6	5350.00	52.1 AV	54.0	-1.9	1.00 V	314	47.8	4.3
7	#10500.00	58.5 PK	68.2	-9.7	1.46 V	283	47.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.8 PK	74.0	-14.2	2.75 H	143	55.2	4.6
2	5460.00	44.9 AV	54.0	-9.1	2.75 H	143	40.3	4.6
3	#5470.00	61.4 PK	68.2	-6.8	2.75 H	143	56.8	4.6
4	*5570.00	97.9 PK			2.75 H	143	55.2	42.7
5	*5570.00	85.9 AV			2.75 H	143	43.2	42.7
6	#5725.00	57.4 PK	68.2	-10.8	2.75 H	143	51.6	5.8
7	11140.00	58.0 PK	74.0	-16.0	1.96 H	304	46.2	11.8
8	11140.00	47.0 AV	54.0	-7.0	1.96 H	304	35.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.0 PK	74.0	-10.0	1.01 V	315	59.4	4.6
2	5460.00	48.6 AV	54.0	-5.4	1.01 V	315	44.0	4.6
3	#5470.00	66.7 PK	68.2	-1.5	1.01 V	315	62.1	4.6
4	*5570.00	104.8 PK			1.01 V	315	62.1	42.7
5	*5570.00	92.4 AV			1.01 V	315	49.7	42.7
6	#5725.00	62.1 PK	68.2	-6.1	1.01 V	315	56.3	5.8
7	11140.00	58.9 PK	74.0	-15.1	1.43 V	279	47.1	11.8
8	11140.00	47.8 AV	54.0	-6.2	1.43 V	279	36.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

2TX (Test Mode B - Monopole Antenna)

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.8 PK	74.0	-14.2	2.60 H	175	55.6	4.2
2	5150.00	45.8 AV	54.0	-8.2	2.60 H	175	41.6	4.2
3	*5180.00	112.6 PK			2.60 H	175	70.7	41.9
4	*5180.00	103.2 AV			2.60 H	175	61.3	41.9
5	#10360.00	57.2 PK	68.2	-11.0	2.23 H	304	46.4	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.07 V	308	62.6	4.2
2	5150.00	52.4 AV	54.0	-1.6	1.07 V	308	48.2	4.2
3	*5180.00	119.8 PK			1.07 V	308	77.9	41.9
4	*5180.00	110.5 AV			1.07 V	308	68.6	41.9
5	#10360.00	58.1 PK	68.2	-10.1	1.34 V	284	47.3	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.6 PK			2.63 H	177	72.7	41.9
2	*5200.00	105.2 AV			2.63 H	177	63.3	41.9
3	#10400.00	57.6 PK	68.2	-10.6	2.28 H	303	46.8	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	121.8 PK			1.05 V	309	79.9	41.9
2	*5200.00	112.5 AV			1.05 V	309	70.6	41.9
3	#10400.00	58.4 PK	68.2	-9.8	1.38 V	276	47.6	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.3 PK			2.63 H	180	72.6	41.7
2	*5240.00	104.9 AV			2.63 H	180	63.2	41.7
3	5350.00	55.5 PK	74.0	-18.5	2.63 H	180	51.6	3.9
4	5350.00	43.7 AV	54.0	-10.3	2.63 H	180	39.8	3.9
5	#10480.00	57.8 PK	68.2	-10.4	2.18 H	297	46.7	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.5 PK			1.01 V	305	79.8	41.7
2	*5240.00	112.1 AV			1.01 V	305	70.4	41.7
3	5350.00	56.3 PK	74.0	-17.7	1.01 V	305	52.4	3.9
4	5350.00	44.6 AV	54.0	-9.4	1.01 V	305	40.7	3.9
5	#10480.00	58.8 PK	68.2	-9.4	1.29 V	274	47.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.8 PK	74.0	-18.2	2.66 H	174	51.6	4.2
2	5150.00	43.1 AV	54.0	-10.9	2.66 H	174	38.9	4.2
3	*5260.00	114.3 PK			2.66 H	174	72.7	41.6
4	*5260.00	104.9 AV			2.66 H	174	63.3	41.6
5	#10520.00	58.0 PK	68.2	-10.2	2.27 H	304	46.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	1.24 V	314	51.9	4.2
2	5150.00	44.5 AV	54.0	-9.5	1.24 V	314	40.3	4.2
3	*5260.00	121.7 PK			1.24 V	314	80.1	41.6
4	*5260.00	112.3 AV			1.24 V	314	70.7	41.6
5	#10520.00	59.1 PK	68.2	-9.1	1.26 V	280	47.9	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.3 PK			2.56 H	184	72.8	41.5
2	*5300.00	104.9 AV			2.56 H	184	63.4	41.5
3	10600.00	58.2 PK	74.0	-15.8	2.18 H	311	46.8	11.4
4	10600.00	46.0 AV	54.0	-8.0	2.18 H	311	34.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.8 PK			1.23 V	314	80.3	41.5
2	*5300.00	112.4 AV			1.23 V	314	70.9	41.5
3	10600.00	59.2 PK	74.0	-14.8	1.35 V	288	47.8	11.4
4	10600.00	47.0 AV	54.0	-7.0	1.35 V	288	35.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.9 PK			2.58 H	173	71.4	41.5
2	*5320.00	103.4 AV			2.58 H	173	61.9	41.5
3	5350.00	61.5 PK	74.0	-12.5	2.58 H	173	57.6	3.9
4	5350.00	47.0 AV	54.0	-7.0	2.58 H	173	43.1	3.9
5	10640.00	57.6 PK	74.0	-16.4	2.12 H	305	46.4	11.2
6	10640.00	45.5 AV	54.0	-8.5	2.12 H	305	34.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.2 PK			1.00 V	305	78.7	41.5
2	*5320.00	110.8 AV			1.00 V	305	69.3	41.5
3	5350.00	68.3 PK	74.0	-5.7	1.00 V	305	64.4	3.9
4	5350.00	52.2 AV	54.0	-1.8	1.00 V	305	48.3	3.9
5	10640.00	58.8 PK	74.0	-15.2	1.24 V	277	47.6	11.2
6	10640.00	46.7 AV	54.0	-7.3	1.24 V	277	35.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.6 PK	74.0	-18.4	2.66 H	180	51.5	4.1
2	5460.00	42.9 AV	54.0	-11.1	2.66 H	180	38.8	4.1
3	#5470.00	59.1 PK	68.2	-9.1	2.66 H	180	55.0	4.1
4	*5500.00	109.4 PK			2.66 H	180	67.5	41.9
5	*5500.00	100.0 AV			2.66 H	180	58.1	41.9
6	11000.00	57.5 PK	74.0	-16.5	2.22 H	308	46.2	11.3
7	11000.00	45.4 AV	54.0	-8.6	2.22 H	308	34.1	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.8 PK	74.0	-13.2	1.00 V	322	56.7	4.1
2	5460.00	45.6 AV	54.0	-8.4	1.00 V	322	41.5	4.1
3	#5470.00	66.6 PK	68.2	-1.6	1.00 V	322	62.5	4.1
4	*5500.00	117.7 PK			1.00 V	322	75.8	41.9
5	*5500.00	108.6 AV			1.00 V	322	66.7	41.9
6	11000.00	58.5 PK	74.0	-15.5	1.28 V	284	47.2	11.3
7	11000.00	46.4 AV	54.0	-7.6	1.28 V	284	35.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	114.1 PK			2.74 H	180	71.8	42.3
2	*5600.00	104.9 AV			2.74 H	180	62.6	42.3
3	11200.00	58.4 PK	74.0	-15.6	2.20 H	308	46.5	11.9
4	11200.00	46.5 AV	54.0	-7.5	2.20 H	308	34.6	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.5 PK			1.00 V	306	78.2	42.3
2	*5600.00	111.3 AV			1.00 V	306	69.0	42.3
3	11200.00	59.4 PK	74.0	-14.6	1.25 V	288	47.5	11.9
4	11200.00	47.6 AV	54.0	-6.4	1.25 V	288	35.7	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.8 PK			2.66 H	177	65.8	43.0
2	*5700.00	99.8 AV			2.66 H	177	56.8	43.0
3	#5725.00	62.1 PK	68.2	-6.1	2.66 H	177	56.5	5.6
4	11400.00	58.5 PK	74.0	-15.5	2.22 H	308	46.0	12.5
5	11400.00	46.4 AV	54.0	-7.6	2.22 H	308	33.9	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	116.5 PK			1.00 V	300	73.5	43.0
2	*5700.00	107.4 AV			1.00 V	300	64.4	43.0
3	#5725.00	66.6 PK	68.2	-1.6	1.00 V	300	61.0	5.6
4	11400.00	59.3 PK	74.0	-14.7	1.30 V	291	46.8	12.5
5	11400.00	47.4 AV	54.0	-6.6	1.30 V	291	34.9	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.6 PK	88.2	-32.6	2.65 H	174	51.5	4.1
2	*5720.00	113.6 PK			2.65 H	174	70.4	43.2
3	*5720.00	103.8 AV			2.65 H	174	60.6	43.2
4	#5850.00	56.3 PK	88.2	-31.9	2.65 H	174	50.5	5.8
5	11440.00	58.8 PK	74.0	-15.2	2.26 H	312	46.4	12.4
6	11440.00	46.6 AV	54.0	-7.4	2.26 H	312	34.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.7 PK	68.2	-11.5	1.00 V	307	52.6	4.1
2	*5720.00	119.7 PK			1.00 V	307	76.5	43.2
3	*5720.00	110.5 AV			1.00 V	307	67.3	43.2
4	#5850.00	58.1 PK	68.2	-10.1	1.00 V	307	52.3	5.8
5	11440.00	59.9 PK	74.0	-14.1	1.32 V	292	47.5	12.4
6	11440.00	47.8 AV	54.0	-6.2	1.32 V	292	35.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	116.6 PK			2.62 H	179	73.3	43.3
2	*5745.00	106.5 AV			2.62 H	179	63.2	43.3
3	11490.00	58.5 PK	74.0	-15.5	2.23 H	301	46.3	12.2
4	11490.00	46.5 AV	54.0	-7.5	2.23 H	301	34.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	122.1 PK			1.00 V	307	78.8	43.3
2	*5745.00	111.7 AV			1.00 V	307	68.4	43.3
3	11490.00	59.2 PK	74.0	-14.8	1.25 V	283	47.0	12.2
4	11490.00	47.5 AV	54.0	-6.5	1.25 V	283	35.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	116.8 PK			2.72 H	180	73.4	43.4
2	*5785.00	106.8 AV			2.72 H	180	63.4	43.4
3	11570.00	58.1 PK	74.0	-15.9	2.31 H	312	46.3	11.8
4	11570.00	46.1 AV	54.0	-7.9	2.31 H	312	34.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	123.1 PK			1.00 V	308	79.7	43.4
2	*5785.00	113.6 AV			1.00 V	308	70.2	43.4
3	11570.00	59.6 PK	74.0	-14.4	1.30 V	273	47.8	11.8
4	11570.00	47.2 AV	54.0	-6.8	1.30 V	273	35.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	116.2 PK			2.68 H	181	72.8	43.4
2	*5825.00	106.4 AV			2.68 H	181	63.0	43.4
3	11650.00	58.3 PK	74.0	-15.7	2.15 H	320	46.6	11.7
4	11650.00	46.1 AV	54.0	-7.9	2.15 H	320	34.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	122.6 PK			1.00 V	306	79.2	43.4
2	*5825.00	112.5 AV			1.00 V	306	69.1	43.4
3	11650.00	59.1 PK	74.0	-14.9	1.39 V	278	47.4	11.7
4	11650.00	47.2 AV	54.0	-6.8	1.39 V	278	35.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	2.67 H	176	53.4	4.2
2	5150.00	45.1 AV	54.0	-8.9	2.67 H	176	40.9	4.2
3	*5180.00	113.6 PK			2.67 H	176	71.7	41.9
4	*5180.00	102.9 AV			2.67 H	176	61.0	41.9
5	#10360.00	57.4 PK	68.2	-10.8	2.23 H	305	46.6	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.09 V	307	63.1	4.2
2	5150.00	52.4 AV	54.0	-1.6	1.09 V	307	48.2	4.2
3	*5180.00	121.1 PK			1.09 V	307	79.2	41.9
4	*5180.00	110.3 AV			1.09 V	307	68.4	41.9
5	#10360.00	58.4 PK	68.2	-9.8	1.25 V	283	47.6	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	115.7 PK			2.61 H	171	73.8	41.9
2	*5200.00	105.0 AV			2.61 H	171	63.1	41.9
3	#10400.00	57.4 PK	68.2	-10.8	2.16 H	295	46.6	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.0 PK			1.06 V	306	81.1	41.9
2	*5200.00	112.2 AV			1.06 V	306	70.3	41.9
3	#10400.00	58.5 PK	68.2	-9.7	1.33 V	281	47.7	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.0 PK			2.66 H	175	73.3	41.7
2	*5240.00	104.3 AV			2.66 H	175	62.6	41.7
3	5350.00	55.2 PK	74.0	-18.8	2.66 H	175	51.3	3.9
4	5350.00	44.6 AV	54.0	-9.4	2.66 H	175	40.7	3.9
5	#10480.00	57.6 PK	68.2	-10.6	2.13 H	302	46.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	122.5 PK			1.07 V	304	80.8	41.7
2	*5240.00	111.7 AV			1.07 V	304	70.0	41.7
3	5350.00	56.5 PK	74.0	-17.5	1.07 V	304	52.6	3.9
4	5350.00	45.0 AV	54.0	-9.0	1.07 V	304	41.1	3.9
5	#10480.00	59.0 PK	68.2	-9.2	1.31 V	278	47.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	2.69 H	177	51.3	4.2
2	5150.00	43.8 AV	54.0	-10.2	2.69 H	177	39.6	4.2
3	*5260.00	116.5 PK			2.69 H	177	74.9	41.6
4	*5260.00	104.7 AV			2.69 H	177	63.1	41.6
5	#10520.00	57.8 PK	68.2	-10.4	2.14 H	308	46.6	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.07 V	313	52.9	4.2
2	5150.00	44.5 AV	54.0	-9.5	1.07 V	313	40.3	4.2
3	*5260.00	123.7 PK			1.07 V	313	82.1	41.6
4	*5260.00	111.9 AV			1.07 V	313	70.3	41.6
5	#10520.00	58.9 PK	68.2	-9.3	1.39 V	294	47.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.3 PK			2.64 H	171	74.8	41.5
2	*5300.00	105.0 AV			2.64 H	171	63.5	41.5
3	10600.00	58.2 PK	74.0	-15.8	2.16 H	299	46.8	11.4
4	10600.00	46.0 AV	54.0	-8.0	2.16 H	299	34.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.8 PK			1.10 V	312	82.3	41.5
2	*5300.00	112.2 AV			1.10 V	312	70.7	41.5
3	10600.00	59.2 PK	74.0	-14.8	1.37 V	285	47.8	11.4
4	10600.00	47.0 AV	54.0	-7.0	1.37 V	285	35.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.8 PK			2.59 H	178	72.3	41.5
2	*5320.00	102.3 AV			2.59 H	178	60.8	41.5
3	5350.00	60.0 PK	74.0	-14.0	2.59 H	178	56.1	3.9
4	5350.00	46.2 AV	54.0	-7.8	2.59 H	178	42.3	3.9
5	10640.00	57.5 PK	74.0	-16.5	2.11 H	306	46.3	11.2
6	10640.00	45.3 AV	54.0	-8.7	2.11 H	306	34.1	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.9 PK			1.02 V	305	79.4	41.5
2	*5320.00	109.8 AV			1.02 V	305	68.3	41.5
3	5350.00	69.3 PK	74.0	-4.7	1.02 V	305	65.4	3.9
4	5350.00	52.2 AV	54.0	-1.8	1.02 V	305	48.3	3.9
5	10640.00	58.5 PK	74.0	-15.5	1.38 V	286	47.3	11.2
6	10640.00	46.5 AV	54.0	-7.5	1.38 V	286	35.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.3 PK	74.0	-17.7	2.65 H	184	52.2	4.1
2	5460.00	43.7 AV	54.0	-10.3	2.65 H	184	39.6	4.1
3	#5470.00	60.6 PK	68.2	-7.6	2.65 H	184	56.5	4.1
4	*5500.00	112.1 PK			2.65 H	184	70.2	41.9
5	*5500.00	100.6 AV			2.65 H	184	58.7	41.9
6	11000.00	57.2 PK	74.0	-16.8	2.34 H	300	45.9	11.3
7	11000.00	45.3 AV	54.0	-8.7	2.34 H	300	34.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.2 PK	74.0	-13.8	1.00 V	303	56.1	4.1
2	5460.00	45.9 AV	54.0	-8.1	1.00 V	303	41.8	4.1
3	#5470.00	66.5 PK	68.2	-1.7	1.00 V	303	62.4	4.1
4	*5500.00	119.7 PK			1.00 V	303	77.8	41.9
5	*5500.00	108.6 AV			1.00 V	303	66.7	41.9
6	11000.00	58.4 PK	74.0	-15.6	1.25 V	280	47.1	11.3
7	11000.00	46.3 AV	54.0	-7.7	1.25 V	280	35.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	115.2 PK			2.67 H	185	72.9	42.3
2	*5600.00	104.3 AV			2.67 H	185	62.0	42.3
3	11200.00	58.1 PK	74.0	-15.9	2.12 H	301	46.2	11.9
4	11200.00	46.0 AV	54.0	-8.0	2.12 H	301	34.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.5 PK			1.02 V	300	78.2	42.3
2	*5600.00	109.8 AV			1.02 V	300	67.5	42.3
3	11200.00	58.8 PK	74.0	-15.2	1.27 V	280	46.9	11.9
4	11200.00	46.8 AV	54.0	-7.2	1.27 V	280	34.9	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.4 PK			2.68 H	170	66.4	43.0
2	*5700.00	98.3 AV			2.68 H	170	55.3	43.0
3	#5725.00	62.4 PK	68.2	-5.8	2.68 H	170	56.8	5.6
4	11400.00	45.5 PK	74.0	-28.5	2.40 H	312	33.0	12.5
5	11400.00	33.8 AV	54.0	-20.2	2.40 H	312	21.3	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.2 PK			1.00 V	311	75.2	43.0
2	*5700.00	106.6 AV			1.00 V	311	63.6	43.0
3	#5725.00	66.6 PK	68.2	-1.6	1.00 V	311	61.0	5.6
4	11400.00	59.3 PK	74.0	-14.7	1.23 V	285	46.8	12.5
5	11400.00	47.0 AV	54.0	-7.0	1.23 V	285	34.5	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.0 PK	68.2	-13.2	2.60 H	175	50.9	4.1
2	*5720.00	114.8 PK			2.60 H	175	71.6	43.2
3	*5720.00	104.0 AV			2.60 H	175	60.8	43.2
4	#5850.00	56.9 PK	68.2	-11.3	2.60 H	175	51.1	5.8
5	11440.00	58.2 PK	74.0	-15.8	2.28 H	307	45.8	12.4
6	11440.00	46.4 AV	54.0	-7.6	2.28 H	307	34.0	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.4 PK	68.2	-11.8	1.00 V	304	52.3	4.1
2	*5720.00	122.4 PK			1.00 V	304	79.2	43.2
3	*5720.00	110.4 AV			1.00 V	304	67.2	43.2
4	#5850.00	58.9 PK	68.2	-9.3	1.00 V	304	53.1	5.8
5	11440.00	59.5 PK	74.0	-14.5	1.32 V	275	47.1	12.4
6	11440.00	47.4 AV	54.0	-6.6	1.32 V	275	35.0	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	117.3 PK			2.70 H	183	74.0	43.3
2	*5745.00	106.5 AV			2.70 H	183	63.2	43.3
3	11490.00	58.3 PK	74.0	-15.7	2.19 H	318	46.1	12.2
4	11490.00	46.2 AV	54.0	-7.8	2.19 H	318	34.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	123.6 PK			1.01 V	306	80.3	43.3
2	*5745.00	113.1 AV			1.01 V	306	69.8	43.3
3	11490.00	58.9 PK	74.0	-15.1	1.32 V	279	46.7	12.2
4	11490.00	47.1 AV	54.0	-6.9	1.32 V	279	34.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	116.5 PK			2.67 H	181	73.1	43.4
2	*5785.00	105.9 AV			2.67 H	181	62.5	43.4
3	11570.00	58.1 PK	74.0	-15.9	2.12 H	309	46.3	11.8
4	11570.00	46.1 AV	54.0	-7.9	2.12 H	309	34.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	123.5 PK			1.00 V	311	80.1	43.4
2	*5785.00	113.0 AV			1.00 V	311	69.6	43.4
3	11570.00	58.7 PK	74.0	-15.3	1.25 V	280	46.9	11.8
4	11570.00	46.9 AV	54.0	-7.1	1.25 V	280	35.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	118.5 PK			2.65 H	187	75.1	43.4
2	*5825.00	106.4 AV			2.65 H	187	63.0	43.4
3	11650.00	57.8 PK	74.0	-16.2	2.20 H	311	46.1	11.7
4	11650.00	45.6 AV	54.0	-8.4	2.20 H	311	33.9	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	123.2 PK			1.00 V	308	79.8	43.4
2	*5825.00	112.9 AV			1.00 V	308	69.5	43.4
3	11650.00	58.7 PK	74.0	-15.3	1.33 V	286	47.0	11.7
4	11650.00	46.6 AV	54.0	-7.4	1.33 V	286	34.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.0 PK	74.0	-12.0	2.69 H	178	57.8	4.2
2	5150.00	47.2 AV	54.0	-6.8	2.69 H	178	43.0	4.2
3	*5190.00	108.1 PK			2.69 H	178	66.3	41.8
4	*5190.00	96.7 AV			2.69 H	178	54.9	41.8
5	#10380.00	57.0 PK	68.2	-11.2	2.29 H	306	46.2	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	1.10 V	311	64.0	4.2
2	5150.00	52.5 AV	54.0	-1.5	1.10 V	311	48.3	4.2
3	*5190.00	114.8 PK			1.10 V	311	73.0	41.8
4	*5190.00	104.0 AV			1.10 V	311	62.2	41.8
5	#10380.00	58.1 PK	68.2	-10.1	1.29 V	272	47.3	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	2.63 H	178	52.8	4.2
2	5150.00	44.5 AV	54.0	-9.5	2.63 H	178	40.3	4.2
3	*5230.00	113.7 PK			2.63 H	178	71.9	41.8
4	*5230.00	102.2 AV			2.63 H	178	60.4	41.8
5	#10460.00	57.4 PK	68.2	-10.8	2.15 H	308	46.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.8 PK	74.0	-10.2	1.07 V	315	59.6	4.2
2	5150.00	50.5 AV	54.0	-3.5	1.07 V	315	46.3	4.2
3	*5230.00	121.0 PK			1.07 V	315	79.2	41.8
4	*5230.00	109.5 AV			1.07 V	315	67.7	41.8
5	#10460.00	58.3 PK	68.2	-9.9	1.26 V	279	47.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	113.4 PK			2.66 H	172	71.8	41.6
2	*5270.00	101.9 AV			2.66 H	172	60.3	41.6
3	5350.00	60.8 PK	74.0	-13.2	2.66 H	172	56.9	3.9
4	5350.00	47.5 AV	54.0	-6.5	2.66 H	172	43.6	3.9
5	#10540.00	57.5 PK	68.2	-10.7	2.24 H	304	46.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	121.1 PK			1.15 V	307	79.5	41.6
2	*5270.00	109.2 AV			1.15 V	307	67.6	41.6
3	5350.00	66.2 PK	74.0	-7.8	1.15 V	307	62.3	3.9
4	5350.00	52.3 AV	54.0	-1.7	1.15 V	307	48.4	3.9
5	#10540.00	58.7 PK	68.2	-9.5	1.35 V	289	47.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	108.3 PK			2.67 H	177	66.8	41.5
2	*5310.00	96.7 AV			2.67 H	177	55.2	41.5
3	5350.00	55.9 PK	74.0	-18.1	2.67 H	177	52.0	3.9
4	5350.00	42.8 AV	54.0	-11.2	2.67 H	177	38.9	3.9
5	10620.00	57.4 PK	74.0	-16.6	2.23 H	307	46.2	11.2
6	10620.00	45.3 AV	54.0	-8.7	2.23 H	307	34.1	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	115.7 PK			1.11 V	305	74.2	41.5
2	*5310.00	104.0 AV			1.11 V	305	62.5	41.5
3	5350.00	67.0 PK	74.0	-7.0	1.11 V	305	63.1	3.9
4	5350.00	52.3 AV	54.0	-1.7	1.11 V	305	48.4	3.9
5	10620.00	58.4 PK	74.0	-15.6	1.28 V	284	47.2	11.2
6	10620.00	46.3 AV	54.0	-7.7	1.28 V	284	35.1	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	2.71 H	183	51.2	4.1
2	5460.00	42.6 AV	54.0	-11.4	2.71 H	183	38.5	4.1
3	#5470.00	57.6 PK	68.2	-10.6	2.71 H	183	53.5	4.1
4	*5510.00	107.7 PK			2.71 H	183	65.7	42.0
5	*5510.00	95.7 AV			2.71 H	183	53.7	42.0
6	11020.00	57.5 PK	74.0	-16.5	2.23 H	310	46.1	11.4
7	11020.00	45.5 AV	54.0	-8.5	2.23 H	310	34.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.1 PK	74.0	-12.9	1.03 V	304	57.0	4.1
2	5460.00	47.6 AV	54.0	-6.4	1.03 V	304	43.5	4.1
3	#5470.00	66.6 PK	68.2	-1.6	1.03 V	304	62.5	4.1
4	*5510.00	115.5 PK			1.03 V	304	73.5	42.0
5	*5510.00	103.0 AV			1.03 V	304	61.0	42.0
6	11020.00	58.2 PK	74.0	-15.8	1.38 V	287	46.8	11.4
7	11020.00	45.8 AV	54.0	-8.2	1.38 V	287	34.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	114.1 PK			2.68 H	185	71.5	42.6
2	*5630.00	101.9 AV			2.68 H	185	59.3	42.6
3	11260.00	58.2 PK	74.0	-15.8	2.31 H	304	46.1	12.1
4	11260.00	46.2 AV	54.0	-7.8	2.31 H	304	34.1	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	121.1 PK			1.00 V	308	78.5	42.6
2	*5630.00	108.7 AV			1.00 V	308	66.1	42.6
3	11260.00	59.2 PK	74.0	-14.8	1.36 V	285	47.1	12.1
4	11260.00	47.2 AV	54.0	-6.8	1.36 V	285	35.1	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	110.9 PK			2.57 H	183	68.0	42.9
2	*5670.00	98.9 AV			2.57 H	183	56.0	42.9
3	#5725.00	60.9 PK	68.2	-7.3	2.57 H	183	55.3	5.6
4	11340.00	58.1 PK	74.0	-15.9	2.22 H	302	45.8	12.3
5	11340.00	46.1 AV	54.0	-7.9	2.22 H	302	33.8	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.7 PK			1.00 V	310	73.8	42.9
2	*5670.00	104.9 AV			1.00 V	310	62.0	42.9
3	#5725.00	66.7 PK	68.2	-1.5	1.00 V	310	61.1	5.6
4	11340.00	59.3 PK	74.0	-14.7	1.36 V	286	47.0	12.3
5	11340.00	47.2 AV	54.0	-6.8	1.36 V	286	34.9	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.3 PK	68.2	-11.9	2.62 H	184	52.2	4.1
2	*5710.00	111.5 PK			2.62 H	184	68.4	43.1
3	*5710.00	101.7 AV			2.62 H	184	58.6	43.1
4	#5850.00	56.2 PK	68.2	-12.0	2.62 H	184	50.4	5.8
5	11420.00	58.8 PK	74.0	-15.2	2.26 H	306	46.3	12.5
6	11420.00	46.5 AV	54.0	-7.5	2.26 H	306	34.0	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.7 PK	68.2	-11.5	1.00 V	311	52.6	4.1
2	*5710.00	119.2 PK			1.00 V	311	76.1	43.1
3	*5710.00	107.5 AV			1.00 V	311	64.4	43.1
4	#5850.00	58.8 PK	68.2	-9.4	1.00 V	311	53.0	5.8
5	11420.00	59.4 PK	74.0	-14.6	1.28 V	290	46.9	12.5
6	11420.00	47.5 AV	54.0	-6.5	1.28 V	290	35.0	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	113.8 PK			2.66 H	183	70.5	43.3
2	*5755.00	103.3 AV			2.66 H	183	60.0	43.3
3	11510.00	58.3 PK	74.0	-15.7	2.25 H	308	46.2	12.1
4	11510.00	46.5 AV	54.0	-7.5	2.25 H	308	34.4	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5755.00	121.5 PK			1.00 V	302	78.2	43.3
2	*5755.00	109.6 AV			1.00 V	302	66.3	43.3
3	11510.00	59.1 PK	74.0	-14.9	1.21 V	287	47.0	12.1
4	11510.00	47.1 AV	54.0	-6.9	1.21 V	287	35.0	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	115.0 PK			2.72 H	178	71.6	43.4
2	*5795.00	102.7 AV			2.72 H	178	59.3	43.4
3	11590.00	57.8 PK	74.0	-16.2	2.08 H	301	46.1	11.7
4	11590.00	45.7 AV	54.0	-8.3	2.08 H	301	34.0	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	121.9 PK			1.00 V	303	78.5	43.4
2	*5795.00	109.8 AV			1.00 V	303	66.4	43.4
3	11590.00	58.6 PK	74.0	-15.4	1.19 V	278	46.9	11.7
4	11590.00	46.6 AV	54.0	-7.4	1.19 V	278	34.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.3 PK	74.0	-13.7	2.59 H	173	56.1	4.2
2	5150.00	47.3 AV	54.0	-6.7	2.59 H	173	43.1	4.2
3	*5210.00	105.3 PK			2.59 H	173	63.4	41.9
4	*5210.00	93.1 AV			2.59 H	173	51.2	41.9
5	#10420.00	56.8 PK	68.2	-11.4	2.17 H	307	45.9	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.01 V	307	62.6	4.2
2	5150.00	52.4 AV	54.0	-1.6	1.01 V	307	48.2	4.2
3	*5210.00	112.4 PK			1.01 V	307	70.5	41.9
4	*5210.00	100.3 AV			1.01 V	307	58.4	41.9
5	#10420.00	58.0 PK	68.2	-10.2	1.27 V	294	47.1	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	106.0 PK			2.70 H	176	64.5	41.5
2	*5290.00	93.9 AV			2.70 H	176	52.4	41.5
3	5350.00	59.5 PK	74.0	-14.5	2.70 H	176	55.6	3.9
4	5350.00	46.1 AV	54.0	-7.9	2.70 H	176	42.2	3.9
5	#10580.00	57.1 PK	68.2	-11.1	2.24 H	309	45.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	113.4 PK			1.00 V	306	71.9	41.5
2	*5290.00	101.3 AV			1.00 V	306	59.8	41.5
3	5350.00	66.0 PK	74.0	-8.0	1.00 V	306	62.1	3.9
4	5350.00	52.3 AV	54.0	-1.7	1.00 V	306	48.4	3.9
5	#10580.00	58.4 PK	68.2	-9.8	1.22 V	296	47.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.4 PK	74.0	-15.6	2.68 H	177	54.3	4.1
2	5460.00	46.2 AV	54.0	-7.8	2.68 H	177	42.1	4.1
3	#5470.00	61.1 PK	68.2	-7.1	2.68 H	177	57.0	4.1
4	*5530.00	104.6 PK			2.68 H	177	62.6	42.0
5	*5530.00	92.1 AV			2.68 H	177	50.1	42.0
6	11060.00	57.7 PK	74.0	-16.3	2.20 H	318	46.2	11.5
7	11060.00	45.7 AV	54.0	-8.3	2.20 H	318	34.2	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.9 PK	74.0	-9.1	1.00 V	307	60.8	4.1
2	5460.00	51.5 AV	54.0	-2.5	1.00 V	307	47.4	4.1
3	#5470.00	66.4 PK	68.2	-1.8	1.00 V	307	62.3	4.1
4	*5530.00	112.6 PK			1.00 V	307	70.6	42.0
5	*5530.00	100.6 AV			1.00 V	307	58.6	42.0
6	11060.00	58.5 PK	74.0	-15.5	1.28 V	293	47.0	11.5
7	11060.00	46.6 AV	54.0	-7.4	1.28 V	293	35.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	108.7 PK			2.78 H	180	66.3	42.4
2	*5610.00	97.6 AV			2.78 H	180	55.2	42.4
3	#5725.00	62.0 PK	68.2	-6.2	2.78 H	180	56.4	5.6
4	11220.00	58.0 PK	74.0	-16.0	2.17 H	318	46.0	12.0
5	11220.00	46.0 AV	54.0	-8.0	2.17 H	318	34.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	115.1 PK			1.00 V	306	72.7	42.4
2	*5610.00	103.6 AV			1.00 V	306	61.2	42.4
3	#5725.00	66.7 PK	68.2	-1.5	1.00 V	306	61.1	5.6
4	11220.00	58.8 PK	74.0	-15.2	1.37 V	299	46.8	12.0
5	11220.00	47.0 AV	54.0	-7.0	1.37 V	299	35.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.1 PK	68.2	-13.1	2.71 H	171	51.0	4.1
2	*5690.00	111.6 PK			2.71 H	171	68.6	43.0
3	*5690.00	98.5 AV			2.71 H	171	55.5	43.0
4	#5850.00	57.9 PK	68.2	-10.3	2.71 H	171	52.1	5.8
5	11380.00	58.7 PK	74.0	-15.3	2.30 H	310	46.2	12.5
6	11380.00	46.8 AV	54.0	-7.2	2.30 H	310	34.3	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.2 PK	68.2	-12.0	1.03 V	306	52.1	4.1
2	*5690.00	116.8 PK			1.03 V	306	73.8	43.0
3	*5690.00	104.3 AV			1.03 V	306	61.3	43.0
4	#5850.00	58.1 PK	68.2	-10.1	1.03 V	306	52.3	5.8
5	11380.00	59.6 PK	74.0	-14.4	1.19 V	306	47.1	12.5
6	11380.00	47.5 AV	54.0	-6.5	1.19 V	306	35.0	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	108.6 PK			2.69 H	183	65.2	43.4
2	*5775.00	97.2 AV			2.69 H	183	53.8	43.4
3	11550.00	57.9 PK	74.0	-16.1	2.11 H	300	46.0	11.9
4	11550.00	45.9 AV	54.0	-8.1	2.11 H	300	34.0	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	115.9 PK			1.00 V	301	72.5	43.4
2	*5775.00	104.0 AV			1.00 V	301	60.6	43.4
3	11550.00	59.1 PK	74.0	-14.9	1.17 V	290	47.2	11.9
4	11550.00	46.9 AV	54.0	-7.1	1.17 V	290	35.0	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	2.86 H	177	54.2	4.2
2	5150.00	45.1 AV	54.0	-8.9	2.86 H	177	40.9	4.2
3	*5250.00	100.0 PK			2.86 H	177	58.3	41.7
4	*5250.00	88.4 AV			2.86 H	177	46.7	41.7
5	5350.00	58.3 PK	74.0	-15.7	2.86 H	177	54.4	3.9
6	5350.00	45.6 AV	54.0	-8.4	2.86 H	177	41.7	3.9
7	#10500.00	57.5 PK	68.2	-10.7	2.19 H	309	46.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	1.00 V	315	62.1	4.2
2	5150.00	52.5 AV	54.0	-1.5	1.00 V	315	48.3	4.2
3	*5250.00	107.9 PK			1.00 V	315	66.2	41.7
4	*5250.00	96.2 AV			1.00 V	315	54.5	41.7
5	5350.00	63.2 PK	74.0	-10.8	1.00 V	315	59.3	3.9
6	5350.00	51.0 AV	54.0	-3.0	1.00 V	315	47.1	3.9
7	#10500.00	58.2 PK	68.2	-10.0	1.38 V	300	47.0	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.1 PK	74.0	-13.9	2.66 H	179	56.0	4.1
2	5460.00	47.7 AV	54.0	-6.3	2.66 H	179	43.6	4.1
3	#5470.00	60.3 PK	68.2	-7.9	2.66 H	179	56.2	4.1
4	*5570.00	101.4 PK			2.66 H	179	59.2	42.2
5	*5570.00	89.9 AV			2.66 H	179	47.7	42.2
6	#5725.00	59.7 PK	68.2	-8.5	2.66 H	179	54.1	5.6
7	11140.00	58.1 PK	74.0	-15.9	2.23 H	308	46.2	11.9
8	11140.00	46.0 AV	54.0	-8.0	2.23 H	308	34.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.1 PK	74.0	-8.9	1.00 V	303	61.0	4.1
2	5460.00	52.5 AV	54.0	-1.5	1.00 V	303	48.4	4.1
3	#5470.00	65.6 PK	68.2	-2.6	1.00 V	303	61.5	4.1
4	*5570.00	108.4 PK			1.00 V	303	66.2	42.2
5	*5570.00	97.0 AV			1.00 V	303	54.8	42.2
6	#5725.00	63.5 PK	68.2	-4.7	1.00 V	303	57.9	5.6
7	11140.00	58.7 PK	74.0	-15.3	1.38 V	299	46.8	11.9
8	11140.00	46.8 AV	54.0	-7.2	1.38 V	299	34.9	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.0 PK	74.0	-10.0	2.41 H	146	59.5	4.5
2	5150.00	45.6 AV	54.0	-8.4	2.41 H	146	41.1	4.5
3	*5180.00	120.2 PK			2.41 H	146	77.8	42.4
4	*5180.00	108.9 AV			2.41 H	146	66.5	42.4
5	#10360.00	58.5 PK	68.2	-9.7	2.28 H	317	46.9	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	1.00 V	300	61.0	4.5
2	5150.00	46.5 AV	54.0	-7.5	1.00 V	300	42.0	4.5
3	*5180.00	127.9 PK			1.00 V	300	85.5	42.4
4	*5180.00	116.6 AV			1.00 V	300	74.2	42.4
5	#10360.00	59.5 PK	68.2	-8.7	1.34 V	286	47.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.7 PK			4.00 H	216	81.2	42.5
2	*5200.00	113.6 AV			4.00 H	216	71.1	42.5
3	#10400.00	58.3 PK	68.2	-9.9	2.23 H	315	47.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	130.9 PK			1.03 V	312	88.4	42.5
2	*5200.00	120.7 AV			1.03 V	312	78.2	42.5
3	#10400.00	59.3 PK	68.2	-8.9	1.33 V	282	48.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.1 PK			2.73 H	230	80.5	42.6
2	*5240.00	112.4 AV			2.73 H	230	69.8	42.6
3	5350.00	55.9 PK	74.0	-18.1	2.73 H	230	51.6	4.3
4	5350.00	42.8 AV	54.0	-11.2	2.73 H	230	38.5	4.3
5	#10480.00	58.4 PK	68.2	-9.8	2.33 H	305	47.0	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	128.8 PK			1.01 V	302	86.2	42.6
2	*5240.00	118.6 AV			1.01 V	302	76.0	42.6
3	5350.00	57.2 PK	74.0	-16.8	1.01 V	302	52.9	4.3
4	5350.00	45.6 AV	54.0	-8.4	1.01 V	302	41.3	4.3
5	#10480.00	59.5 PK	68.2	-8.7	1.36 V	292	48.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.5 PK	74.0	-17.5	2.63 H	223	52.0	4.5
2	5150.00	44.0 AV	54.0	-10.0	2.63 H	223	39.5	4.5
3	*5260.00	123.5 PK			2.63 H	223	80.9	42.6
4	*5260.00	113.0 AV			2.63 H	223	70.4	42.6
5	#10520.00	58.1 PK	68.2	-10.1	2.63 H	223	46.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.17 V	277	52.8	4.5
2	5150.00	45.0 AV	54.0	-9.0	1.17 V	277	40.5	4.5
3	*5260.00	128.8 PK			1.17 V	277	86.2	42.6
4	*5260.00	118.7 AV			1.17 V	277	76.1	42.6
5	#10520.00	59.4 PK	68.2	-8.8	1.33 V	292	48.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.5 PK			2.66 H	217	80.9	42.6
2	*5300.00	113.1 AV			2.66 H	217	70.5	42.6
3	10600.00	58.0 PK	74.0	-16.0	2.34 H	316	47.0	11.0
4	10600.00	45.8 AV	54.0	-8.2	2.34 H	316	34.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	129.8 PK			1.09 V	295	87.2	42.6
2	*5300.00	119.4 AV			1.09 V	295	76.8	42.6
3	10600.00	59.1 PK	74.0	-14.9	1.32 V	295	48.1	11.0
4	10600.00	47.5 AV	54.0	-6.5	1.32 V	295	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.1 PK			2.65 H	223	80.6	42.5
2	*5320.00	110.9 AV			2.65 H	223	68.4	42.5
3	5350.00	73.9 PK	74.0	-0.1	2.65 H	223	69.6	4.3
4	5350.00	45.3 AV	54.0	-8.7	2.65 H	223	41.0	4.3
5	10640.00	57.5 PK	74.0	-16.5	2.22 H	318	46.5	11.0
6	10640.00	45.5 AV	54.0	-8.5	2.22 H	318	34.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	127.5 PK			1.00 V	315	85.0	42.5
2	*5320.00	115.7 AV			1.00 V	315	73.2	42.5
3	5350.00	68.3 PK	74.0	-5.7	1.00 V	315	64.0	4.3
4	5350.00	46.8 AV	54.0	-7.2	1.00 V	315	42.5	4.3
5	10640.00	58.7 PK	74.0	-15.3	1.33 V	295	47.7	11.0
6	10640.00	46.5 AV	54.0	-7.5	1.33 V	295	35.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.9 PK	74.0	-14.1	2.47 H	226	55.3	4.6
2	5460.00	44.2 AV	54.0	-9.8	2.47 H	226	39.6	4.6
3	#5470.00	62.1 PK	68.2	-6.1	2.47 H	226	57.5	4.6
4	*5500.00	117.9 PK			2.47 H	226	75.2	42.7
5	*5500.00	107.9 AV			2.47 H	226	65.2	42.7
6	11000.00	58.0 PK	74.0	-16.0	2.34 H	316	46.4	11.6
7	11000.00	46.8 AV	54.0	-7.2	2.34 H	316	35.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.5 PK	74.0	-12.5	1.04 V	276	56.9	4.6
2	5460.00	44.6 AV	54.0	-9.4	1.04 V	276	40.0	4.6
3	#5470.00	62.8 PK	68.2	-5.4	1.04 V	276	58.2	4.6
4	*5500.00	126.0 PK			1.04 V	276	83.3	42.7
5	*5500.00	114.6 AV			1.04 V	276	71.9	42.7
6	11000.00	59.0 PK	74.0	-15.0	1.43 V	294	47.4	11.6
7	11000.00	47.8 AV	54.0	-6.2	1.43 V	294	36.2	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	121.3 PK			2.54 H	218	78.3	43.0
2	*5600.00	111.4 AV			2.54 H	218	68.4	43.0
3	11200.00	58.5 PK	74.0	-15.5	2.36 H	312	46.7	11.8
4	11200.00	47.4 AV	54.0	-6.6	2.36 H	312	35.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	128.2 PK			1.22 V	275	85.2	43.0
2	*5600.00	118.3 AV			1.22 V	275	75.3	43.0
3	11200.00	59.4 PK	74.0	-14.6	1.46 V	291	47.6	11.8
4	11200.00	48.2 AV	54.0	-5.8	1.46 V	291	36.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	117.0 PK			2.48 H	228	73.1	43.9
2	*5700.00	106.0 AV			2.48 H	228	62.1	43.9
3	#5725.00	59.9 PK	68.2	-8.3	2.48 H	228	54.1	5.8
4	11400.00	58.8 PK	74.0	-15.2	2.39 H	312	46.6	12.2
5	11400.00	47.6 AV	54.0	-6.4	2.39 H	312	35.4	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	124.1 PK			1.14 V	275	80.2	43.9
2	*5700.00	112.8 AV			1.14 V	275	68.9	43.9
3	#5725.00	63.6 PK	68.2	-4.6	1.14 V	275	57.8	5.8
4	11400.00	59.8 PK	74.0	-14.2	1.39 V	294	47.6	12.2
5	11400.00	48.6 AV	54.0	-5.4	1.39 V	294	36.4	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.5 PK	68.2	-11.7	2.46 H	217	51.9	4.6
2	*5720.00	121.6 PK			2.46 H	217	77.8	43.8
3	*5720.00	111.3 AV			2.46 H	217	67.5	43.8
4	#5850.00	57.6 PK	68.2	-10.6	2.46 H	217	51.4	6.2
5	11440.00	58.9 PK	74.0	-15.1	2.37 H	314	46.7	12.2
6	11440.00	47.6 AV	54.0	-6.4	2.37 H	314	35.4	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.9 PK	68.2	-11.3	1.04 V	303	52.3	4.6
2	*5720.00	127.6 PK			1.04 V	303	83.8	43.8
3	*5720.00	117.1 AV			1.04 V	303	73.3	43.8
4	#5850.00	57.9 PK	68.2	-10.3	1.04 V	303	51.7	6.2
5	11440.00	59.8 PK	74.0	-14.2	1.42 V	287	47.6	12.2
6	11440.00	48.7 AV	54.0	-5.3	1.42 V	287	36.5	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	122.5 PK			2.53 H	226	78.8	43.7
2	*5745.00	115.3 AV			2.53 H	226	71.6	43.7
3	11490.00	59.2 PK	74.0	-14.8	2.36 H	312	46.9	12.3
4	11490.00	47.9 AV	54.0	-6.1	2.36 H	312	35.6	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	129.3 PK			1.10 V	313	85.6	43.7
2	*5745.00	122.2 AV			1.10 V	313	78.5	43.7
3	11490.00	60.1 PK	74.0	-13.9	1.38 V	294	47.8	12.3
4	11490.00	48.8 AV	54.0	-5.2	1.38 V	294	36.5	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	122.5 PK			2.48 H	221	78.5	44.0
2	*5785.00	114.9 AV			2.48 H	221	70.9	44.0
3	11570.00	59.4 PK	74.0	-14.6	2.31 H	313	46.8	12.6
4	11570.00	48.1 AV	54.0	-5.9	2.31 H	313	35.5	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	129.6 PK			1.08 V	314	85.6	44.0
2	*5785.00	122.0 AV			1.08 V	314	78.0	44.0
3	11570.00	60.3 PK	74.0	-13.7	1.45 V	289	47.7	12.6
4	11570.00	49.1 AV	54.0	-4.9	1.45 V	289	36.5	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	122.1 PK			2.46 H	222	77.9	44.2
2	*5825.00	114.7 AV			2.46 H	222	70.5	44.2
3	11650.00	59.1 PK	74.0	-14.9	2.32 H	317	46.7	12.4
4	11650.00	47.9 AV	54.0	-6.1	2.32 H	317	35.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	128.9 PK			1.06 V	311	84.7	44.2
2	*5825.00	121.6 AV			1.06 V	311	77.4	44.2
3	11650.00	60.1 PK	74.0	-13.9	1.35 V	298	47.7	12.4
4	11650.00	48.8 AV	54.0	-5.2	1.35 V	298	36.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	2.43 H	127	56.0	4.5
2	5150.00	45.0 AV	54.0	-9.0	2.43 H	127	40.5	4.5
3	*5180.00	119.3 PK			2.43 H	127	76.9	42.4
4	*5180.00	107.5 AV			2.43 H	127	65.1	42.4
5	#10360.00	58.4 PK	68.2	-9.8	2.25 H	317	46.8	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.6 PK	74.0	-11.4	1.00 V	298	58.1	4.5
2	5150.00	46.0 AV	54.0	-8.0	1.00 V	298	41.5	4.5
3	*5180.00	125.1 PK			1.00 V	298	82.7	42.4
4	*5180.00	113.9 AV			1.00 V	298	71.5	42.4
5	#10360.00	59.2 PK	68.2	-9.0	1.32 V	287	47.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	122.1 PK			2.52 H	217	79.6	42.5
2	*5200.00	112.0 AV			2.52 H	217	69.5	42.5
3	#10400.00	58.3 PK	68.2	-9.9	2.33 H	308	47.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	129.2 PK			1.01 V	300	86.7	42.5
2	*5200.00	119.1 AV			1.01 V	300	76.6	42.5
3	#10400.00	59.4 PK	68.2	-8.8	1.36 V	295	48.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.0 PK			2.60 H	224	78.4	42.6
2	*5240.00	110.8 AV			2.60 H	224	68.2	42.6
3	5350.00	56.8 PK	74.0	-17.2	2.60 H	224	52.5	4.3
4	5350.00	44.5 AV	54.0	-9.5	2.60 H	224	40.2	4.3
5	#10480.00	58.3 PK	68.2	-9.9	2.33 H	305	46.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	127.5 PK			1.00 V	304	84.9	42.6
2	*5240.00	116.0 AV			1.00 V	304	73.4	42.6
3	5350.00	58.3 PK	74.0	-15.7	1.00 V	304	54.0	4.3
4	5350.00	46.0 AV	54.0	-8.0	1.00 V	304	41.7	4.3
5	#10480.00	59.4 PK	68.2	-8.8	1.33 V	286	48.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	2.66 H	187	52.1	4.5
2	5150.00	43.6 AV	54.0	-10.4	2.66 H	187	39.1	4.5
3	*5260.00	122.1 PK			2.66 H	187	79.5	42.6
4	*5260.00	110.8 AV			2.66 H	187	68.2	42.6
5	#10520.00	58.1 PK	68.2	-10.1	2.26 H	317	46.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.1 PK	74.0	-16.9	1.00 V	299	52.6	4.5
2	5150.00	44.7 AV	54.0	-9.3	1.00 V	299	40.2	4.5
3	*5260.00	127.7 PK			1.00 V	299	85.1	42.6
4	*5260.00	116.4 AV			1.00 V	299	73.8	42.6
5	#10520.00	59.3 PK	68.2	-8.9	1.35 V	286	48.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.5 PK			2.64 H	229	79.9	42.6
2	*5300.00	111.1 AV			2.64 H	229	68.5	42.6
3	10600.00	58.0 PK	74.0	-16.0	2.33 H	306	47.0	11.0
4	10600.00	45.9 AV	54.0	-8.1	2.33 H	306	34.9	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	127.9 PK			1.00 V	295	85.3	42.6
2	*5300.00	117.6 AV			1.00 V	295	75.0	42.6
3	10600.00	59.2 PK	74.0	-14.8	1.23 V	292	48.2	11.0
4	10600.00	46.5 AV	54.0	-7.5	1.23 V	292	35.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	119.8 PK			2.66 H	223	77.3	42.5
2	*5320.00	108.6 AV			2.66 H	223	66.1	42.5
3	5350.00	64.2 PK	74.0	-9.8	2.66 H	223	59.9	4.3
4	5350.00	45.7 AV	54.0	-8.3	2.66 H	223	41.4	4.3
5	10640.00	57.5 PK	74.0	-16.5	2.38 H	306	46.5	11.0
6	10640.00	45.5 AV	54.0	-8.5	2.38 H	306	34.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	125.9 PK			1.00 V	303	83.4	42.5
2	*5320.00	114.1 AV			1.00 V	303	71.6	42.5
3	5350.00	69.3 PK	74.0	-4.7	1.00 V	303	65.0	4.3
4	5350.00	47.5 AV	54.0	-6.5	1.00 V	303	43.2	4.3
5	10640.00	58.5 PK	74.0	-15.5	1.32 V	285	47.5	11.0
6	10640.00	46.6 AV	54.0	-7.4	1.32 V	285	35.6	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	2.45 H	222	52.6	4.6
2	5460.00	43.3 AV	54.0	-10.7	2.45 H	222	38.7	4.6
3	#5470.00	57.9 PK	68.2	-10.3	2.45 H	222	53.3	4.6
4	*5500.00	118.2 PK			2.45 H	222	75.5	42.7
5	*5500.00	106.0 AV			2.45 H	222	63.3	42.7
6	11000.00	57.8 PK	74.0	-16.2	2.36 H	317	46.2	11.6
7	11000.00	46.7 AV	54.0	-7.3	2.36 H	317	35.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.3 PK	74.0	-12.7	1.12 V	320	56.7	4.6
2	5460.00	44.8 AV	54.0	-9.2	1.12 V	320	40.2	4.6
3	#5470.00	62.7 PK	68.2	-5.5	1.12 V	320	58.1	4.6
4	*5500.00	125.1 PK			1.12 V	320	82.4	42.7
5	*5500.00	113.0 AV			1.12 V	320	70.3	42.7
6	11000.00	58.8 PK	74.0	-15.2	1.43 V	296	47.2	11.6
7	11000.00	47.5 AV	54.0	-6.5	1.43 V	296	35.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	119.0 PK			2.46 H	225	76.0	43.0
2	*5600.00	109.3 AV			2.46 H	225	66.3	43.0
3	11200.00	58.4 PK	74.0	-15.6	2.35 H	316	46.6	11.8
4	11200.00	47.2 AV	54.0	-6.8	2.35 H	316	35.4	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	125.8 PK			1.24 V	272	82.8	43.0
2	*5600.00	116.1 AV			1.24 V	272	73.1	43.0
3	11200.00	59.2 PK	74.0	-14.8	1.52 V	298	47.4	11.8
4	11200.00	48.1 AV	54.0	-5.9	1.52 V	298	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.7 PK			2.47 H	225	69.8	43.9
2	*5700.00	103.9 AV			2.47 H	225	60.0	43.9
3	#5725.00	59.6 PK	68.2	-8.6	2.47 H	225	53.8	5.8
4	11400.00	58.5 PK	74.0	-15.5	2.38 H	317	46.3	12.2
5	11400.00	47.5 AV	54.0	-6.5	2.38 H	317	35.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.3 PK			1.00 V	275	76.4	43.9
2	*5700.00	110.6 AV			1.00 V	275	66.7	43.9
3	#5725.00	63.6 PK	68.2	-4.6	1.00 V	275	57.8	5.8
4	11400.00	59.6 PK	74.0	-14.4	1.42 V	293	47.4	12.2
5	11400.00	48.5 AV	54.0	-5.5	1.42 V	293	36.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.2 PK	68.2	-12.0	2.48 H	228	51.6	4.6
2	*5720.00	119.5 PK			2.48 H	228	75.7	43.8
3	*5720.00	108.4 AV			2.48 H	228	64.6	43.8
4	#5850.00	57.7 PK	68.2	-10.5	2.48 H	228	51.5	6.2
5	11440.00	58.6 PK	74.0	-15.4	2.37 H	311	46.4	12.2
6	11440.00	47.5 AV	54.0	-6.5	2.37 H	311	35.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.5 PK	68.2	-11.7	1.18 V	273	51.9	4.6
2	*5720.00	125.3 PK			1.18 V	273	81.5	43.8
3	*5720.00	115.4 AV			1.18 V	273	71.6	43.8
4	#5850.00	57.8 PK	68.2	-10.4	1.18 V	273	51.6	6.2
5	11440.00	59.7 PK	74.0	-14.3	1.44 V	296	47.5	12.2
6	11440.00	48.5 AV	54.0	-5.5	1.44 V	296	36.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	122.5 PK			2.50 H	224	78.8	43.7
2	*5745.00	113.1 AV			2.50 H	224	69.4	43.7
3	11490.00	59.0 PK	74.0	-15.0	2.34 H	315	46.7	12.3
4	11490.00	47.8 AV	54.0	-6.2	2.34 H	315	35.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	129.3 PK			1.07 V	315	85.6	43.7
2	*5745.00	120.0 AV			1.07 V	315	76.3	43.7
3	11490.00	59.9 PK	74.0	-14.1	1.42 V	298	47.6	12.3
4	11490.00	48.7 AV	54.0	-5.3	1.42 V	298	36.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	121.5 PK			2.49 H	217	77.5	44.0
2	*5785.00	112.3 AV			2.49 H	217	68.3	44.0
3	11570.00	59.1 PK	74.0	-14.9	2.38 H	316	46.5	12.6
4	11570.00	47.9 AV	54.0	-6.1	2.38 H	316	35.3	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	128.3 PK			1.09 V	318	84.3	44.0
2	*5785.00	119.2 AV			1.09 V	318	75.2	44.0
3	11570.00	60.1 PK	74.0	-13.9	1.43 V	294	47.5	12.6
4	11570.00	49.0 AV	54.0	-5.0	1.43 V	294	36.4	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	121.8 PK			2.44 H	227	77.6	44.2
2	*5825.00	112.1 AV			2.44 H	227	67.9	44.2
3	11650.00	59.0 PK	74.0	-15.0	2.35 H	314	46.6	12.4
4	11650.00	47.8 AV	54.0	-6.2	2.35 H	314	35.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	128.7 PK			1.12 V	311	84.5	44.2
2	*5825.00	119.0 AV			1.12 V	311	74.8	44.2
3	11650.00	59.9 PK	74.0	-14.1	1.41 V	294	47.5	12.4
4	11650.00	48.7 AV	54.0	-5.3	1.41 V	294	36.3	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.2 PK	74.0	-13.8	2.70 H	226	55.7	4.5
2	5150.00	44.4 AV	54.0	-9.6	2.70 H	226	39.9	4.5
3	*5180.00	116.4 PK			2.70 H	226	74.0	42.4
4	*5180.00	105.4 AV			2.70 H	226	63.0	42.4
5	#10360.00	58.3 PK	68.2	-9.9	2.33 H	310	46.7	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.5 PK	74.0	-9.5	1.10 V	309	60.0	4.5
2	5150.00	46.5 AV	54.0	-7.5	1.10 V	309	42.0	4.5
3	*5180.00	122.7 PK			1.10 V	309	80.3	42.4
4	*5180.00	110.9 AV			1.10 V	309	68.5	42.4
5	#10360.00	59.1 PK	68.2	-9.1	1.33 V	285	47.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	120.8 PK			2.70 H	226	78.3	42.5
2	*5200.00	110.7 AV			2.70 H	226	68.2	42.5
3	#10400.00	58.2 PK	68.2	-10.0	2.33 H	312	46.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	128.5 PK			1.06 V	295	86.0	42.5
2	*5200.00	118.1 AV			1.06 V	295	75.6	42.5
3	#10400.00	59.0 PK	68.2	-9.2	1.32 V	287	47.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.1 PK			2.47 H	227	77.5	42.6
2	*5240.00	108.7 AV			2.47 H	227	66.1	42.6
3	5350.00	56.4 PK	74.0	-17.6	2.47 H	227	52.1	4.3
4	5350.00	44.2 AV	54.0	-9.8	2.47 H	227	39.9	4.3
5	#10480.00	58.2 PK	68.2	-10.0	2.32 H	307	46.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	124.7 PK			1.00 V	327	82.1	42.6
2	*5240.00	114.2 AV			1.00 V	327	71.6	42.6
3	5350.00	58.7 PK	74.0	-15.3	1.00 V	327	54.4	4.3
4	5350.00	45.8 AV	54.0	-8.2	1.00 V	327	41.5	4.3
5	#10480.00	59.4 PK	68.2	-8.8	1.36 V	299	48.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	2.60 H	230	51.0	4.5
2	5150.00	43.5 AV	54.0	-10.5	2.60 H	230	39.0	4.5
3	*5260.00	120.3 PK			2.60 H	230	77.7	42.6
4	*5260.00	108.2 AV			2.60 H	230	65.6	42.6
5	#10520.00	58.1 PK	68.2	-10.1	2.12 H	300	46.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.00 V	305	53.0	4.5
2	5150.00	45.0 AV	54.0	-9.0	1.00 V	305	40.5	4.5
3	*5260.00	124.8 PK			1.00 V	305	82.2	42.6
4	*5260.00	114.1 AV			1.00 V	305	71.5	42.6
5	#10520.00	59.3 PK	68.2	-8.9	1.37 V	285	48.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.8 PK			2.55 H	212	77.2	42.6
2	*5300.00	109.2 AV			2.55 H	212	66.6	42.6
3	10600.00	57.8 PK	74.0	-16.2	1.36 H	272	46.8	11.0
4	10600.00	45.6 AV	54.0	-8.4	1.36 H	272	34.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	126.0 PK			1.03 V	310	83.4	42.6
2	*5300.00	115.9 AV			1.03 V	310	73.3	42.6
3	10600.00	59.0 PK	74.0	-15.0	1.32 V	360	48.0	11.0
4	10600.00	47.2 AV	54.0	-6.8	1.32 V	360	36.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.3 PK			2.75 H	225	75.8	42.5
2	*5320.00	105.9 AV			2.75 H	225	63.4	42.5
3	5350.00	62.8 PK	74.0	-11.2	2.75 H	225	58.5	4.3
4	5350.00	45.5 AV	54.0	-8.5	2.75 H	225	41.2	4.3
5	10640.00	57.7 PK	74.0	-16.3	2.32 H	311	46.7	11.0
6	10640.00	45.5 AV	54.0	-8.5	2.32 H	311	34.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.5 PK			1.00 V	304	81.0	42.5
2	*5320.00	111.7 AV			1.00 V	304	69.2	42.5
3	5350.00	71.3 PK	74.0	-2.7	1.00 V	304	67.0	4.3
4	5350.00	48.5 AV	54.0	-5.5	1.00 V	304	44.2	4.3
5	10640.00	58.4 PK	74.0	-15.6	1.32 V	299	47.4	11.0
6	10640.00	46.2 AV	54.0	-7.8	1.32 V	299	35.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.4 PK	74.0	-17.6	2.51 H	220	51.8	4.6
2	5460.00	43.3 AV	54.0	-10.7	2.51 H	220	38.7	4.6
3	#5470.00	56.9 PK	68.2	-11.3	2.51 H	220	52.3	4.6
4	*5500.00	116.4 PK			2.51 H	220	73.7	42.7
5	*5500.00	103.6 AV			2.51 H	220	60.9	42.7
6	11000.00	56.7 PK	74.0	-17.3	2.31 H	313	45.1	11.6
7	11000.00	46.5 AV	54.0	-7.5	2.31 H	313	34.9	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.8 PK	74.0	-12.2	1.12 V	318	57.2	4.6
2	5460.00	45.2 AV	54.0	-8.8	1.12 V	318	40.6	4.6
3	#5470.00	62.9 PK	68.2	-5.3	1.12 V	318	58.3	4.6
4	*5500.00	122.4 PK			1.12 V	318	79.7	42.7
5	*5500.00	110.5 AV			1.12 V	318	67.8	42.7
6	11000.00	58.6 PK	74.0	-15.4	1.49 V	296	47.0	11.6
7	11000.00	47.4 AV	54.0	-6.6	1.49 V	296	35.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	117.5 PK			2.47 H	229	74.5	43.0
2	*5600.00	107.2 AV			2.47 H	229	64.2	43.0
3	11200.00	58.2 PK	74.0	-15.8	2.38 H	317	46.4	11.8
4	11200.00	47.1 AV	54.0	-6.9	2.38 H	317	35.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.2 PK			1.21 V	278	81.2	43.0
2	*5600.00	113.9 AV			1.21 V	278	70.9	43.0
3	11200.00	59.1 PK	74.0	-14.9	1.57 V	298	47.3	11.8
4	11200.00	48.1 AV	54.0	-5.9	1.57 V	298	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.8 PK			2.52 H	223	67.9	43.9
2	*5700.00	101.5 AV			2.52 H	223	57.6	43.9
3	#5725.00	57.6 PK	68.2	-10.6	2.52 H	223	51.8	5.8
4	11400.00	58.4 PK	74.0	-15.6	1.42 H	296	46.2	12.2
5	11400.00	47.2 AV	54.0	-6.8	1.42 H	296	35.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.8 PK			1.03 V	274	74.9	43.9
2	*5700.00	108.3 AV			1.03 V	274	64.4	43.9
3	#5725.00	61.1 PK	68.2	-7.1	1.03 V	274	55.3	5.8
4	11400.00	59.5 PK	74.0	-14.5	1.47 V	292	47.3	12.2
5	11400.00	48.5 AV	54.0	-5.5	1.47 V	292	36.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.4 PK	68.2	-11.8	2.58 H	229	51.8	4.6
2	*5720.00	119.3 PK			2.58 H	229	75.5	43.8
3	*5720.00	107.0 AV			2.58 H	229	63.2	43.8
4	#5850.00	57.4 PK	68.2	-10.8	2.58 H	229	51.2	6.2
5	11440.00	58.5 PK	74.0	-15.5	2.35 H	312	46.3	12.2
6	11440.00	47.3 AV	54.0	-6.7	2.35 H	312	35.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.9 PK	68.2	-11.3	1.10 V	315	52.3	4.6
2	*5720.00	124.3 PK			1.10 V	315	80.5	43.8
3	*5720.00	113.9 AV			1.10 V	315	70.1	43.8
4	#5850.00	57.6 PK	68.2	-10.6	1.10 V	315	51.4	6.2
5	11440.00	59.5 PK	74.0	-14.5	1.49 V	303	47.3	12.2
6	11440.00	48.5 AV	54.0	-5.5	1.49 V	303	36.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	120.3 PK			2.47 H	226	76.6	43.7
2	*5745.00	110.1 AV			2.47 H	226	66.4	43.7
3	11490.00	58.9 PK	74.0	-15.1	2.46 H	318	46.6	12.3
4	11490.00	47.7 AV	54.0	-6.3	2.46 H	318	35.4	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	127.3 PK			1.00 V	302	83.6	43.7
2	*5745.00	117.1 AV			1.00 V	302	73.4	43.7
3	11490.00	59.6 PK	74.0	-14.4	1.45 V	302	47.3	12.3
4	11490.00	46.5 AV	54.0	-7.5	1.45 V	302	34.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	119.4 PK			2.54 H	223	75.4	44.0
2	*5785.00	109.7 AV			2.54 H	223	65.7	44.0
3	11570.00	58.9 PK	74.0	-15.1	2.38 H	312	46.3	12.6
4	11570.00	47.7 AV	54.0	-6.3	2.38 H	312	35.1	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	126.3 PK			1.09 V	311	82.3	44.0
2	*5785.00	116.6 AV			1.09 V	311	72.6	44.0
3	11570.00	60.0 PK	74.0	-14.0	1.52 V	293	47.4	12.6
4	11570.00	48.9 AV	54.0	-5.1	1.52 V	293	36.3	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	119.9 PK			2.51 H	225	75.7	44.2
2	*5825.00	109.9 AV			2.51 H	225	65.7	44.2
3	11650.00	58.9 PK	74.0	-15.1	2.38 H	315	46.5	12.4
4	11650.00	47.7 AV	54.0	-6.3	2.38 H	315	35.3	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	126.6 PK			1.09 V	311	82.4	44.2
2	*5825.00	116.7 AV			1.09 V	311	72.5	44.2
3	11650.00	59.8 PK	74.0	-14.2	1.42 V	301	47.4	12.4
4	11650.00	48.6 AV	54.0	-5.4	1.42 V	301	36.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.1 PK			2.54 H	187	77.5	42.6
2	*5240.00	109.6 AV			2.54 H	187	67.0	42.6
3	5350.00	55.1 PK	74.0	-18.9	2.54 H	187	50.8	4.3
4	5350.00	44.3 AV	54.0	-9.7	2.54 H	187	40.0	4.3
5	#10480.00	58.3 PK	68.2	-9.9	2.10 H	317	46.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	126.6 PK			1.00 V	304	84.0	42.6
2	*5240.00	116.2 AV			1.00 V	304	73.6	42.6
3	5350.00	59.3 PK	74.0	-14.7	1.00 V	360	55.0	4.3
4	5350.00	45.8 AV	54.0	-8.2	1.00 V	360	41.5	4.3
5	#10480.00	59.6 PK	68.2	-8.6	1.38 V	299	48.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.6 PK			2.70 H	169	77.0	42.6
2	*5300.00	110.7 AV			2.70 H	169	68.1	42.6
3	10600.00	58.2 PK	74.0	-15.8	2.40 H	318	47.2	11.0
4	10600.00	45.3 AV	54.0	-8.7	2.40 H	318	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	127.1 PK			1.00 V	303	84.5	42.6
2	*5300.00	117.2 AV			1.00 V	303	74.6	42.6
3	10600.00	58.8 PK	74.0	-15.2	1.40 V	277	47.8	11.0
4	10600.00	47.1 AV	54.0	-6.9	1.40 V	277	36.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	121.9 PK			2.71 H	166	78.9	43.0
2	*5600.00	111.5 AV			2.71 H	166	68.5	43.0
3	11200.00	58.7 PK	74.0	-15.3	2.22 H	305	46.9	11.8
4	11200.00	47.4 AV	54.0	-6.6	2.22 H	305	35.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	126.6 PK			1.06 V	317	83.6	43.0
2	*5600.00	116.5 AV			1.06 V	317	73.5	43.0
3	11200.00	59.7 PK	74.0	-14.3	1.37 V	294	47.9	11.8
4	11200.00	48.1 AV	54.0	-5.9	1.37 V	294	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	121.5 PK			2.75 H	168	77.5	44.0
2	*5785.00	111.6 AV			2.75 H	168	67.6	44.0
3	11570.00	59.4 PK	74.0	-14.6	2.00 H	311	46.8	12.6
4	11570.00	47.9 AV	54.0	-6.1	2.00 H	311	35.3	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	127.0 PK			1.00 V	318	83.0	44.0
2	*5785.00	117.5 AV			1.00 V	318	73.5	44.0
3	11570.00	60.4 PK	74.0	-13.6	1.32 V	298	47.8	12.6
4	11570.00	49.2 AV	54.0	-4.8	1.32 V	298	36.6	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.1 PK			2.77 H	187	76.5	42.6
2	*5240.00	107.6 AV			2.77 H	187	65.0	42.6
3	5350.00	55.4 PK	74.0	-18.6	2.76 H	187	51.1	4.3
4	5350.00	43.8 AV	54.0	-10.2	2.76 H	187	39.5	4.3
5	#10480.00	58.9 PK	68.2	-9.3	2.13 H	312	47.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	124.8 PK			1.00 V	304	82.2	42.6
2	*5240.00	113.8 AV			1.00 V	304	71.2	42.6
3	5350.00	57.5 PK	74.0	-16.5	1.00 V	304	53.2	4.3
4	5350.00	46.0 AV	54.0	-8.0	1.00 V	304	41.7	4.3
5	#10480.00	59.7 PK	68.2	-8.5	1.35 V	297	48.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.7 PK			2.66 H	187	76.1	42.6
2	*5300.00	109.6 AV			2.66 H	187	67.0	42.6
3	10600.00	58.0 PK	74.0	-16.0	2.32 H	318	47.0	11.0
4	10600.00	45.2 AV	54.0	-8.8	2.32 H	318	34.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	127.1 PK			1.07 V	306	84.5	42.6
2	*5300.00	116.1 AV			1.07 V	306	73.5	42.6
3	10600.00	58.8 PK	74.0	-15.2	1.33 V	280	47.8	11.0
4	10600.00	46.9 AV	54.0	-7.1	1.33 V	280	35.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.8 PK			2.62 H	177	77.8	43.0
2	*5600.00	109.6 AV			2.62 H	177	66.6	43.0
3	11200.00	58.3 PK	74.0	-15.7	2.32 H	295	46.5	11.8
4	11200.00	46.9 AV	54.0	-7.1	2.32 H	295	35.1	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.6 PK			1.01 V	311	81.6	43.0
2	*5600.00	114.1 AV			1.01 V	311	71.1	43.0
3	11200.00	59.6 PK	74.0	-14.4	1.38 V	278	47.8	11.8
4	11200.00	48.4 AV	54.0	-5.6	1.38 V	278	36.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	122.0 PK			2.68 H	168	78.0	44.0
2	*5785.00	111.5 AV			2.68 H	168	67.5	44.0
3	11570.00	59.8 PK	74.0	-14.2	2.26 H	308	47.2	12.6
4	11570.00	47.9 AV	54.0	-6.1	2.26 H	308	35.3	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	127.1 PK			1.00 V	317	83.1	44.0
2	*5785.00	116.0 AV			1.00 V	317	72.0	44.0
3	11570.00	60.6 PK	74.0	-13.4	1.23 V	290	48.0	12.6
4	11570.00	49.1 AV	54.0	-4.9	1.23 V	290	36.5	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	3.03 H	187	61.0	4.5
2	5150.00	49.4 AV	54.0	-4.6	3.03 H	187	44.9	4.5
3	*5210.00	107.7 PK			3.03 H	187	65.2	42.5
4	*5210.00	94.8 AV			3.03 H	187	52.3	42.5
5	#10420.00	57.6 PK	68.2	-10.6	2.03 H	312	46.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.5 PK	74.0	-2.5	1.00 V	306	67.0	4.5
2	5150.00	52.5 AV	54.0	-1.5	1.00 V	306	48.0	4.5
3	*5210.00	113.6 PK			1.00 V	306	71.1	42.5
4	*5210.00	101.5 AV			1.00 V	306	59.0	42.5
5	#10420.00	58.9 PK	68.2	-9.3	1.35 V	291	47.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	106.6 PK			2.91 H	185	64.0	42.6
2	*5290.00	94.8 AV			2.91 H	185	52.2	42.6
3	5350.00	64.5 PK	74.0	-9.5	2.91 H	185	60.2	4.3
4	5350.00	45.7 AV	54.0	-8.3	2.91 H	185	41.4	4.3
5	#10580.00	57.6 PK	68.2	-10.6	2.28 H	306	46.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	112.1 PK			1.00 V	301	69.5	42.6
2	*5290.00	101.8 AV			1.00 V	301	59.2	42.6
3	5350.00	72.3 PK	74.0	-1.7	1.00 V	301	68.0	4.3
4	5350.00	50.5 AV	54.0	-3.5	1.00 V	301	46.2	4.3
5	#10580.00	58.3 PK	68.2	-9.9	1.31 V	296	47.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.0 PK	68.2	-10.2	2.66 H	116	53.4	4.6
2	*5690.00	112.3 PK			2.66 H	116	68.5	43.8
3	*5690.00	101.2 AV			2.66 H	116	57.4	43.8
4	#5850.00	63.2 PK	68.2	-5.0	2.66 H	116	57.0	6.2
5	11380.00	58.4 PK	74.0	-15.6	2.25 H	308	46.4	12.0
6	11380.00	46.5 AV	54.0	-7.5	2.25 H	308	34.5	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	61.6 PK	68.2	-6.6	1.00 V	316	57.0	4.6
2	*5690.00	117.0 PK			1.00 V	316	73.2	43.8
3	*5690.00	106.3 AV			1.00 V	316	62.5	43.8
4	#5850.00	66.7 PK	68.2	-1.5	1.00 V	316	60.5	6.2
5	11380.00	59.2 PK	74.0	-14.8	1.26 V	295	47.2	12.0
6	11380.00	47.0 AV	54.0	-7.0	1.26 V	295	35.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	110.1 PK			2.60 H	117	66.1	44.0
2	*5775.00	98.1 AV			2.60 H	117	54.1	44.0
3	11550.00	58.9 PK	74.0	-15.1	2.22 H	317	46.5	12.4
4	11550.00	46.6 AV	54.0	-7.4	2.22 H	317	34.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5775.00	115.2 PK			1.02 V	297	71.2	44.0
2	*5775.00	105.0 AV			1.02 V	297	61.0	44.0
3	11550.00	59.5 PK	74.0	-14.5	1.20 V	295	47.1	12.4
4	11550.00	47.6 AV	54.0	-6.4	1.20 V	295	35.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.1 PK	74.0	-9.9	2.60 H	132	59.6	4.5
2	5150.00	46.9 AV	54.0	-7.1	2.60 H	132	42.4	4.5
3	*5250.00	102.4 PK			2.60 H	132	59.8	42.6
4	*5250.00	91.4 AV			2.60 H	132	48.8	42.6
5	5350.00	61.1 PK	74.0	-12.9	2.60 H	132	56.8	4.3
6	5350.00	45.5 AV	54.0	-8.5	2.60 H	132	41.2	4.3
7	#10500.00	57.7 PK	68.2	-10.5	2.27 H	318	46.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	69.3 PK	74.0	-4.7	1.01 V	303	64.8	4.5
2	5150.00	52.5 AV	54.0	-1.5	1.01 V	303	48.0	4.5
3	*5250.00	108.6 PK			1.01 V	303	66.0	42.6
4	*5250.00	96.5 AV			1.01 V	303	53.9	42.6
5	5350.00	68.3 PK	74.0	-5.7	1.01 V	303	64.0	4.3
6	5350.00	51.3 AV	54.0	-2.7	1.01 V	303	47.0	4.3
7	#10500.00	58.7 PK	68.2	-9.5	1.33 V	293	47.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.1 PK	74.0	-12.9	2.74 H	130	56.5	4.6
2	5460.00	45.6 AV	54.0	-8.4	2.74 H	130	41.0	4.6
3	#5470.00	62.6 PK	68.2	-5.6	2.74 H	130	58.0	4.6
4	*5570.00	102.8 PK			2.74 H	130	60.1	42.7
5	*5570.00	90.2 AV			2.74 H	130	47.5	42.7
6	#5725.00	59.1 PK	68.2	-9.1	2.74 H	130	53.3	5.8
7	11140.00	58.1 PK	74.0	-15.9	2.31 H	305	46.3	11.8
8	11140.00	46.0 AV	54.0	-8.0	2.31 H	305	34.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.8 PK	74.0	-8.2	1.00 V	300	61.2	4.6
2	5460.00	49.6 AV	54.0	-4.4	1.00 V	300	45.0	4.6
3	#5470.00	66.6 PK	68.2	-1.6	1.00 V	300	62.0	4.6
4	*5570.00	107.9 PK			1.00 V	300	65.2	42.7
5	*5570.00	95.7 AV			1.00 V	300	53.0	42.7
6	#5725.00	62.8 PK	68.2	-5.4	1.00 V	300	57.0	5.8
7	11140.00	58.6 PK	74.0	-15.4	1.32 V	290	46.8	11.8
8	11140.00	46.8 AV	54.0	-7.2	1.32 V	290	35.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	2.80 H	133	61.0	4.5
2	5150.00	47.0 AV	54.0	-7.0	2.80 H	133	42.5	4.5
3	*5250.00	103.1 PK			2.80 H	133	60.5	42.6
4	*5250.00	90.8 AV			2.80 H	133	48.2	42.6
5	5350.00	61.8 PK	74.0	-12.2	2.80 H	133	57.5	4.3
6	5350.00	46.5 AV	54.0	-7.5	2.80 H	133	42.2	4.3
7	#10500.00	57.7 PK	68.2	-10.5	2.21 H	304	46.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	71.5 PK	74.0	-2.5	1.00 V	303	67.0	4.5
2	5150.00	52.5 AV	54.0	-1.5	1.00 V	303	48.0	4.5
3	*5250.00	109.3 PK			1.00 V	303	66.7	42.6
4	*5250.00	97.6 AV			1.00 V	303	55.0	42.6
5	5350.00	65.8 PK	74.0	-8.2	1.00 V	303	61.5	4.3
6	5350.00	50.3 AV	54.0	-3.7	1.00 V	303	46.0	4.3
7	#10500.00	58.5 PK	68.2	-9.7	1.32 V	189	47.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 69% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.8 PK	74.0	-12.2	2.51 H	127	57.2	4.6
2	5460.00	45.1 AV	54.0	-8.9	2.51 H	127	40.5	4.6
3	#5470.00	61.4 PK	68.2	-6.8	2.51 H	127	56.8	4.6
4	*5570.00	102.8 PK			2.51 H	127	60.1	42.7
5	*5570.00	90.7 AV			2.51 H	127	48.0	42.7
6	#5725.00	57.8 PK	68.2	-10.4	2.51 H	127	52.0	5.8
7	11140.00	58.3 PK	74.0	-15.7	2.22 H	307	46.5	11.8
8	11140.00	46.1 AV	54.0	-7.9	2.22 H	307	34.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.6 PK	74.0	-7.4	1.00 V	299	62.0	4.6
2	5460.00	48.4 AV	54.0	-5.6	1.00 V	299	43.8	4.6
3	#5470.00	66.7 PK	68.2	-1.5	1.00 V	299	62.1	4.6
4	*5570.00	108.2 PK			1.01 V	299	65.5	42.7
5	*5570.00	96.2 AV			1.01 V	299	53.5	42.7
6	#5725.00	62.8 PK	68.2	-5.4	1.00 V	299	57.0	5.8
7	11140.00	58.9 PK	74.0	-15.1	1.36 V	296	47.1	11.8
8	11140.00	47.0 AV	54.0	-7.0	1.36 V	296	35.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

1TX (Test Mode C - Dipole Antenna)

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.8 PK	74.0	-17.2	1.48 H	230	52.6	4.2
2	5150.00	43.0 AV	54.0	-11.0	1.48 H	230	38.8	4.2
3	*5180.00	100.3 PK			1.48 H	230	58.4	41.9
4	*5180.00	91.4 AV			1.48 H	230	49.5	41.9
5	#10360.00	56.8 PK	68.2	-11.4	1.77 H	305	46.0	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.3 PK	74.0	-5.7	1.42 V	54	64.1	4.2
2	5150.00	52.4 AV	54.0	-1.6	1.42 V	54	48.2	4.2
3	*5180.00	116.4 PK			1.42 V	54	74.5	41.9
4	*5180.00	107.3 AV			1.42 V	54	65.4	41.9
5	#10360.00	58.6 PK	68.2	-9.6	2.65 V	160	47.8	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	101.0 PK			1.47 H	213	59.1	41.9
2	*5200.00	90.9 AV			1.47 H	213	49.0	41.9
3	#10400.00	56.9 PK	68.2	-11.3	1.75 H	300	46.1	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	117.2 PK			1.33 V	54	75.3	41.9
2	*5200.00	107.5 AV			1.33 V	54	65.6	41.9
3	#10400.00	58.6 PK	68.2	-9.6	2.50 V	159	47.8	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	102.9 PK			1.22 H	238	61.2	41.7
2	*5240.00	93.5 AV			1.22 H	238	51.8	41.7
3	5350.00	54.3 PK	74.0	-19.7	1.22 H	238	50.4	3.9
4	5350.00	41.1 AV	54.0	-12.9	1.22 H	238	37.2	3.9
5	#10480.00	56.7 PK	68.2	-11.5	1.72 H	307	45.6	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	114.4 PK			1.42 V	68	72.7	41.7
2	*5240.00	105.1 AV			1.42 V	68	63.4	41.7
3	5350.00	55.1 PK	74.0	-18.9	1.42 V	68	51.2	3.9
4	5350.00	41.3 AV	54.0	-12.7	1.42 V	68	37.4	3.9
5	#10480.00	58.6 PK	68.2	-9.6	2.67 V	161	47.5	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.5 PK	74.0	-19.5	1.03 H	202	50.3	4.2
2	5150.00	41.5 AV	54.0	-12.5	1.03 H	202	37.3	4.2
3	*5260.00	102.8 PK			1.03 H	202	61.2	41.6
4	*5260.00	92.9 AV			1.03 H	202	51.3	41.6
5	#10520.00	56.7 PK	68.2	-11.5	1.89 H	309	45.5	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	1.19 V	53	50.7	4.2
2	5150.00	42.2 AV	54.0	-11.8	1.19 V	53	38.0	4.2
3	*5260.00	116.6 PK			1.19 V	53	75.0	41.6
4	*5260.00	106.3 AV			1.19 V	53	64.7	41.6
5	#10520.00	58.7 PK	68.2	-9.5	2.68 V	160	47.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	102.9 PK			1.11 H	205	61.4	41.5
2	*5300.00	93.5 AV			1.11 H	205	52.0	41.5
3	10600.00	57.2 PK	74.0	-16.8	1.66 H	312	45.8	11.4
4	10600.00	48.2 AV	54.0	-5.8	1.66 H	312	36.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.6 PK			1.22 V	49	74.1	41.5
2	*5300.00	106.0 AV			1.22 V	49	64.5	41.5
3	10600.00	59.0 PK	74.0	-15.0	2.60 V	176	47.6	11.4
4	10600.00	49.2 AV	54.0	-4.8	2.60 V	176	37.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	102.8 PK			1.15 H	202	61.3	41.5
2	*5320.00	93.2 AV			1.15 H	202	51.7	41.5
3	5350.00	58.7 PK	74.0	-15.3	1.15 H	202	54.8	3.9
4	5350.00	44.7 AV	54.0	-9.3	1.15 H	202	40.8	3.9
5	10640.00	57.4 PK	74.0	-16.6	1.77 H	301	46.2	11.2
6	10640.00	44.0 AV	54.0	-10.0	1.77 H	301	32.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.0 PK			1.44 V	75	73.5	41.5
2	*5320.00	105.3 AV			1.44 V	75	63.8	41.5
3	5350.00	66.9 PK	74.0	-7.1	1.44 V	75	63.0	3.9
4	5350.00	52.4 AV	54.0	-1.6	1.44 V	75	48.5	3.9
5	10640.00	59.0 PK	74.0	-15.0	2.62 V	169	47.8	11.2
6	10640.00	48.5 AV	54.0	-5.5	2.62 V	169	37.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	1.07 H	199	52.4	4.1
2	5460.00	43.5 AV	54.0	-10.5	1.07 H	199	39.4	4.1
3	#5470.00	58.1 PK	68.2	-10.1	1.07 H	199	54.0	4.1
4	*5500.00	102.4 PK			1.07 H	199	60.5	41.9
5	*5500.00	93.5 AV			1.07 H	199	51.6	41.9
6	11000.00	57.8 PK	74.0	-16.2	1.73 H	296	46.5	11.3
7	11000.00	44.5 AV	54.0	-9.5	1.73 H	296	33.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	64.1 PK	74.0	-9.9	1.09 V	52	60.0	4.1
2	5460.00	46.9 AV	54.0	-7.1	1.09 V	52	42.8	4.1
3	#5470.00	66.4 PK	68.2	-1.8	1.09 V	52	62.3	4.1
4	*5500.00	114.7 PK			1.09 V	52	72.8	41.9
5	*5500.00	105.3 AV			1.09 V	52	63.4	41.9
6	11000.00	58.9 PK	74.0	-15.1	2.74 V	174	47.6	11.3
7	11000.00	48.5 AV	54.0	-5.5	2.74 V	174	37.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	104.4 PK			1.06 H	203	62.1	42.3
2	*5600.00	94.6 AV			1.06 H	203	52.3	42.3
3	11200.00	58.1 PK	74.0	-15.9	1.69 H	305	46.2	11.9
4	11200.00	45.0 AV	54.0	-9.0	1.69 H	305	33.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	117.9 PK			1.23 V	75	75.6	42.3
2	*5600.00	108.2 AV			1.23 V	75	65.9	42.3
3	11200.00	58.9 PK	74.0	-15.1	2.58 V	150	47.0	11.9
4	11200.00	48.9 AV	54.0	-5.1	2.58 V	150	37.0	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	100.7 PK			1.12 H	192	57.7	43.0
2	*5700.00	91.7 AV			1.12 H	192	48.7	43.0
3	#5725.00	57.2 PK	68.2	-11.0	1.12 H	192	51.6	5.6
4	11400.00	58.6 PK	74.0	-15.4	1.80 H	306	46.1	12.5
5	11400.00	45.4 AV	54.0	-8.6	1.80 H	306	32.9	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.8 PK			1.30 V	84	70.8	43.0
2	*5700.00	104.5 AV			1.30 V	84	61.5	43.0
3	#5725.00	66.5 PK	68.2	-1.7	1.30 V	84	60.9	5.6
4	11400.00	59.7 PK	74.0	-14.3	2.66 V	162	47.2	12.5
5	11400.00	49.6 AV	54.0	-4.4	2.66 V	162	37.1	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.0 PK	68.2	-12.2	1.10 H	195	51.9	4.1
2	*5720.00	106.6 PK			1.10 H	195	63.4	43.2
3	*5720.00	96.9 AV			1.10 H	195	53.7	43.2
4	#5850.00	56.2 PK	68.2	-12.0	1.10 H	195	50.4	5.8
5	11440.00	58.9 PK	74.0	-15.1	1.83 H	320	46.5	12.4
6	11440.00	45.9 AV	54.0	-8.1	1.83 H	320	33.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.7 PK	68.2	-11.5	1.36 V	78	52.6	4.1
2	*5720.00	119.0 PK			1.36 V	78	75.8	43.2
3	*5720.00	109.2 AV			1.36 V	78	66.0	43.2
4	#5850.00	59.0 PK	68.2	-9.2	1.36 V	78	53.2	5.8
5	11440.00	59.6 PK	74.0	-14.4	2.55 V	173	47.2	12.4
6	11440.00	50.0 AV	54.0	-4.0	2.55 V	173	37.6	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.00	60.7 PK	68.2	-7.5	1.28 H	236	55.6	5.1
2	*5745.00	105.2 PK			1.28 H	236	61.9	43.3
3	*5745.00	95.6 AV			1.28 H	236	52.3	43.3
4	#5940.40	61.5 PK	68.2	-6.7	1.28 H	236	55.7	5.8
5	11490.00	59.9 PK	74.0	-14.1	1.77 H	302	47.9	12.0
6	11490.00	48.7 AV	54.0	-5.3	1.77 H	302	36.7	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5617.20	60.5 PK	68.2	-7.7	1.60 V	80	55.6	4.9
2	*5745.00	117.0 PK			1.60 V	80	73.7	43.3
3	*5745.00	107.3 AV			1.60 V	80	64.0	43.3
4	#5997.60	61.4 PK	68.2	-6.8	1.60 V	80	55.5	5.9
5	11490.00	60.9 PK	74.0	-13.1	2.71 V	162	48.9	12.0
6	11490.00	49.7 AV	54.0	-4.3	2.71 V	162	37.7	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.80	60.8 PK	68.2	-7.4	1.22 H	239	55.7	5.1
2	*5785.00	106.3 PK			1.22 H	239	62.9	43.4
3	*5785.00	96.7 AV			1.22 H	239	53.3	43.4
4	#5942.40	61.5 PK	68.2	-6.7	1.22 H	239	55.7	5.8
5	11570.00	59.5 PK	74.0	-14.5	1.76 H	303	47.9	11.6
6	11570.00	48.4 AV	54.0	-5.6	1.76 H	303	36.8	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5615.20	60.9 PK	68.2	-7.3	1.58 V	81	56.0	4.9
2	*5785.00	117.9 PK			1.58 V	81	74.5	43.4
3	*5785.00	108.3 AV			1.58 V	81	64.9	43.4
4	#5977.20	61.8 PK	68.2	-6.4	1.58 V	81	56.0	5.8
5	11570.00	60.7 PK	74.0	-13.3	2.64 V	158	49.1	11.6
6	11570.00	49.6 AV	54.0	-4.4	2.64 V	158	38.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5609.60	60.7 PK	68.2	-7.5	1.26 H	234	55.9	4.8
2	*5825.00	106.0 PK			1.26 H	234	62.6	43.4
3	*5825.00	96.5 AV			1.26 H	234	53.1	43.4
4	#5988.00	62.0 PK	68.2	-6.2	1.26 H	234	56.1	5.9
5	11650.00	59.4 PK	74.0	-14.6	1.68 H	296	47.8	11.6
6	11650.00	48.4 AV	54.0	-5.6	1.68 H	296	36.8	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.40	60.6 PK	68.2	-7.6	1.52 V	85	55.5	5.1
2	*5825.00	117.8 PK			1.52 V	85	74.4	43.4
3	*5825.00	108.2 AV			1.52 V	85	64.8	43.4
4	#5987.60	61.2 PK	68.2	-7.0	1.52 V	85	55.3	5.9
5	11650.00	60.5 PK	74.0	-13.5	2.66 V	163	48.9	11.6
6	11650.00	49.5 AV	54.0	-4.5	2.66 V	163	37.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.7 PK	74.0	-18.3	1.43 H	230	51.5	4.2
2	5150.00	42.2 AV	54.0	-11.8	1.43 H	230	38.0	4.2
3	*5180.00	100.1 PK			1.43 H	230	58.2	41.9
4	*5180.00	88.4 AV			1.43 H	230	46.5	41.9
5	#10360.00	56.0 PK	68.2	-12.2	1.83 H	305	45.2	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.41 V	75	61.6	4.2
2	5150.00	52.5 AV	54.0	-1.5	1.41 V	75	48.3	4.2
3	*5180.00	115.3 PK			1.31 V	75	73.4	41.9
4	*5180.00	104.4 AV			1.31 V	75	62.5	41.9
5	#10360.00	57.8 PK	68.2	-10.4	2.61 V	160	47.0	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	102.8 PK			1.44 H	168	60.9	41.9
2	*5200.00	92.1 AV			1.44 H	168	50.2	41.9
3	#10400.00	55.9 PK	68.2	-12.3	1.66 H	316	45.1	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	117.6 PK			1.40 V	56	75.7	41.9
2	*5200.00	106.8 AV			1.40 V	56	64.9	41.9
3	#10400.00	57.7 PK	68.2	-10.5	2.70 V	152	46.9	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	103.2 PK			1.17 H	202	61.5	41.7
2	*5240.00	92.0 AV			1.17 H	202	50.3	41.7
3	5350.00	55.9 PK	74.0	-18.1	1.17 H	202	52.0	3.9
4	5350.00	42.4 AV	54.0	-11.6	1.17 H	202	38.5	3.9
5	#10480.00	56.5 PK	68.2	-11.7	1.80 H	300	45.4	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.2 PK			1.29 V	54	76.5	41.7
2	*5240.00	105.4 AV			1.29 V	54	63.7	41.7
3	5350.00	56.7 PK	74.0	-17.3	1.29 V	54	52.8	3.9
4	5350.00	43.1 AV	54.0	-10.9	1.29 V	54	39.2	3.9
5	#10480.00	58.0 PK	68.2	-10.2	2.65 V	163	46.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.2 PK	74.0	-19.8	1.08 H	199	50.0	4.2
2	5150.00	41.3 AV	54.0	-12.7	1.08 H	199	37.1	4.2
3	*5260.00	105.1 PK			1.08 H	199	63.5	41.6
4	*5260.00	93.0 AV			1.08 H	199	51.4	41.6
5	#10520.00	56.5 PK	68.2	-11.7	1.93 H	317	45.3	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.7 PK	74.0	-19.3	1.15 V	42	50.5	4.2
2	5150.00	41.7 AV	54.0	-12.3	1.15 V	42	37.5	4.2
3	*5260.00	117.6 PK			1.15 V	42	76.0	41.6
4	*5260.00	105.6 AV			1.15 V	42	64.0	41.6
5	#10520.00	58.3 PK	68.2	-9.9	2.70 V	168	47.1	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	104.6 PK			1.04 H	203	63.1	41.5
2	*5300.00	92.5 AV			1.04 H	203	51.0	41.5
3	10600.00	56.5 PK	74.0	-17.5	1.74 H	289	45.1	11.4
4	10600.00	47.8 AV	54.0	-6.2	1.74 H	289	36.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.2 PK			1.26 V	50	76.7	41.5
2	*5300.00	105.9 AV			1.26 V	50	64.4	41.5
3	10600.00	58.3 PK	74.0	-15.7	2.58 V	183	46.9	11.4
4	10600.00	48.5 AV	54.0	-5.5	2.58 V	183	37.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	104.0 PK			1.10 H	196	62.5	41.5
2	*5320.00	92.7 AV			1.10 H	196	51.2	41.5
3	5350.00	57.7 PK	74.0	-16.3	1.10 H	196	53.8	3.9
4	5350.00	44.1 AV	54.0	-9.9	1.10 H	196	40.2	3.9
5	10640.00	57.7 PK	74.0	-16.3	1.70 H	298	46.5	11.2
6	10640.00	43.7 AV	54.0	-10.3	1.70 H	298	32.5	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.2 PK			1.11 V	51	74.7	41.5
2	*5320.00	104.3 AV			1.11 V	51	62.8	41.5
3	5350.00	67.6 PK	74.0	-6.4	1.11 V	51	63.7	3.9
4	5350.00	52.3 AV	54.0	-1.7	1.11 V	51	48.4	3.9
5	10640.00	58.2 PK	74.0	-15.8	2.70 V	163	47.0	11.2
6	10640.00	48.0 AV	54.0	-6.0	2.70 V	163	36.8	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.9 PK	74.0	-17.1	1.00 H	207	52.8	4.1
2	5460.00	43.1 AV	54.0	-10.9	1.00 H	207	39.0	4.1
3	#5470.00	57.6 PK	68.2	-10.6	1.00 H	207	53.5	4.1
4	*5500.00	102.9 PK			1.00 H	207	61.0	41.9
5	*5500.00	91.2 AV			1.00 H	207	49.3	41.9
6	11000.00	56.8 PK	74.0	-17.2	1.68 H	271	45.5	11.3
7	11000.00	47.7 AV	54.0	-6.3	1.68 H	271	36.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.4 PK	74.0	-13.6	1.36 V	78	56.3	4.1
2	5460.00	45.2 AV	54.0	-8.8	1.36 V	78	41.1	4.1
3	#5470.00	66.7 PK	68.2	-1.5	1.36 V	78	62.6	4.1
4	*5500.00	116.0 PK			1.36 V	360	74.1	41.9
5	*5500.00	103.9 AV			1.36 V	360	62.0	41.9
6	11000.00	58.1 PK	74.0	-15.9	2.61 V	180	46.8	11.3
7	11000.00	48.1 AV	54.0	-5.9	2.61 V	180	36.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	105.7 PK			1.12 H	216	63.4	42.3
2	*5600.00	93.6 AV			1.12 H	216	51.3	42.3
3	11200.00	57.3 PK	74.0	-16.7	1.76 H	292	45.4	11.9
4	11200.00	48.4 AV	54.0	-5.6	1.76 H	292	36.5	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.1 PK			1.29 V	77	77.8	42.3
2	*5600.00	107.8 AV			1.29 V	77	65.5	42.3
3	11200.00	58.9 PK	74.0	-15.1	2.61 V	190	47.0	11.9
4	11200.00	49.2 AV	54.0	-4.8	2.61 V	190	37.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	101.6 PK			1.15 H	191	58.6	43.0
2	*5700.00	90.2 AV			1.15 H	191	47.2	43.0
3	#5725.00	56.6 PK	68.2	-11.6	1.15 H	191	51.0	5.6
4	11400.00	57.5 PK	74.0	-16.5	1.69 H	269	45.0	12.5
5	11400.00	48.7 AV	54.0	-5.3	1.69 H	269	36.2	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.8 PK			1.41 V	82	71.8	43.0
2	*5700.00	103.2 AV			1.41 V	82	60.2	43.0
3	#5725.00	66.7 PK	68.2	-1.5	1.41 V	82	61.1	5.6
4	11400.00	59.3 PK	74.0	-14.7	2.63 V	179	46.8	12.5
5	11400.00	49.5 AV	54.0	-4.5	2.63 V	179	37.0	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.1 PK	68.2	-13.1	1.16 H	209	51.0	4.1
2	*5720.00	106.0 PK			1.16 H	209	62.8	43.2
3	*5720.00	95.1 AV			1.16 H	209	51.9	43.2
4	#5850.00	57.7 PK	68.2	-10.5	1.16 H	209	51.9	5.8
5	11440.00	57.9 PK	74.0	-16.1	1.66 H	282	45.5	12.4
6	11440.00	48.9 AV	54.0	-5.1	1.66 H	282	36.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.4 PK	68.2	-10.8	1.38 V	79	53.3	4.1
2	*5720.00	120.0 PK			1.38 V	79	76.8	43.2
3	*5720.00	108.5 AV			1.38 V	79	65.3	43.2
4	#5850.00	59.7 PK	68.2	-8.5	1.38 V	79	53.9	5.8
5	11440.00	59.8 PK	74.0	-14.2	2.61 V	188	47.4	12.4
6	11440.00	49.8 AV	54.0	-4.2	2.61 V	188	37.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5600.40	60.2 PK	68.2	-8.0	1.25 H	230	55.5	4.7
2	*5745.00	106.5 PK			1.25 H	230	63.2	43.3
3	*5745.00	95.1 AV			1.25 H	230	51.8	43.3
4	#5964.00	61.8 PK	68.2	-6.4	1.25 H	230	56.0	5.8
5	11490.00	60.1 PK	74.0	-13.9	1.77 H	308	48.1	12.0
6	11490.00	48.8 AV	54.0	-5.2	1.77 H	308	36.8	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.60	60.5 PK	68.2	-7.7	1.59 V	80	55.4	5.1
2	*5745.00	117.9 PK			1.59 V	80	74.6	43.3
3	*5745.00	106.9 AV			1.59 V	80	63.6	43.3
4	#5994.80	62.9 PK	68.2	-5.3	1.59 V	80	57.0	5.9
5	11490.00	61.2 PK	74.0	-12.8	2.78 V	154	49.2	12.0
6	11490.00	49.8 AV	54.0	-4.2	2.78 V	154	37.8	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.80	60.3 PK	68.2	-7.9	1.25 H	236	55.2	5.1
2	*5785.00	108.8 PK			1.25 H	236	65.4	43.4
3	*5785.00	96.7 AV			1.25 H	236	53.3	43.4
4	#5959.20	62.1 PK	68.2	-6.1	1.25 H	236	56.3	5.8
5	11570.00	59.4 PK	74.0	-14.6	1.79 H	305	47.8	11.6
6	11570.00	47.9 AV	54.0	-6.1	1.79 H	305	36.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.80	61.1 PK	68.2	-7.1	1.58 V	80	56.0	5.1
2	*5785.00	120.4 PK			1.58 V	80	77.0	43.4
3	*5785.00	108.3 AV			1.58 V	80	64.9	43.4
4	#5989.60	61.9 PK	68.2	-6.3	1.58 V	80	56.0	5.9
5	11570.00	60.7 PK	74.0	-13.3	2.65 V	163	49.1	11.6
6	11570.00	49.2 AV	54.0	-4.8	2.65 V	163	37.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.40	60.2 PK	68.2	-8.0	1.23 H	232	55.1	5.1
2	*5825.00	109.0 PK			1.23 H	232	65.6	43.4
3	*5825.00	97.7 AV			1.23 H	232	54.3	43.4
4	#5960.00	61.2 PK	68.2	-7.0	1.23 H	232	55.4	5.8
5	11650.00	59.5 PK	74.0	-14.5	1.78 H	300	47.9	11.6
6	11650.00	48.2 AV	54.0	-5.8	1.78 H	300	36.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.80	61.2 PK	68.2	-7.0	1.62 V	82	56.1	5.1
2	*5825.00	120.3 PK			1.62 V	82	76.9	43.4
3	*5825.00	109.2 AV			1.62 V	82	65.8	43.4
4	#5931.60	62.7 PK	68.2	-5.5	1.62 V	82	56.8	5.9
5	11650.00	60.4 PK	74.0	-13.6	2.66 V	162	48.8	11.6
6	11650.00	49.4 AV	54.0	-4.6	2.66 V	162	37.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.1 PK	74.0	-18.9	1.34 H	202	50.9	4.2
2	5150.00	42.2 AV	54.0	-11.8	1.34 H	202	38.0	4.2
3	*5190.00	96.4 PK			1.34 H	202	54.6	41.8
4	*5190.00	84.4 AV			1.34 H	202	42.6	41.8
5	#10380.00	56.1 PK	68.2	-12.1	1.80 H	312	45.3	10.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	1.35 V	76	64.0	4.2
2	5150.00	52.3 AV	54.0	-1.7	1.35 V	76	48.1	4.2
3	*5190.00	111.4 PK			1.35 V	76	69.6	41.8
4	*5190.00	98.4 AV			1.35 V	76	56.6	41.8
5	#10380.00	57.6 PK	68.2	-10.6	2.66 V	160	46.8	10.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.7 PK	74.0	-18.3	1.00 H	204	51.5	4.2
2	5150.00	42.2 AV	54.0	-11.8	1.00 H	204	38.0	4.2
3	*5230.00	102.5 PK			1.00 H	204	60.7	41.8
4	*5230.00	90.8 AV			1.00 H	204	49.0	41.8
5	5350.00	56.9 PK	74.0	-17.1	1.00 H	204	53.0	3.9
6	5350.00	42.1 AV	54.0	-11.9	1.00 H	204	38.2	3.9
7	#10460.00	56.2 PK	68.2	-12.0	1.66 H	312	45.1	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	1.18 V	52	58.8	4.2
2	5150.00	48.5 AV	54.0	-5.5	1.18 V	52	44.3	4.2
3	*5230.00	115.4 PK			1.18 V	52	73.6	41.8
4	*5230.00	103.0 AV			1.18 V	52	61.2	41.8
5	5350.00	56.5 PK	74.0	-17.5	1.18 V	52	52.6	3.9
6	5350.00	43.9 AV	54.0	-10.1	1.18 V	52	40.0	3.9
7	#10460.00	58.0 PK	68.2	-10.2	2.66 V	151	46.9	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25 °C, 70% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	101.1 PK			1.09 H	208	59.5	41.6
2	*5270.00	89.9 AV			1.09 H	208	48.3	41.6
3	5350.00	56.6 PK	74.0	-17.4	1.09 H	208	52.7	3.9
4	5350.00	43.6 AV	54.0	-10.4	1.09 H	208	39.7	3.9
5	#10540.00	57.7 PK	68.2	-10.5	1.79 H	302	46.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	114.6 PK			1.07 V	43	73.0	41.6
2	*5270.00	102.1 AV			1.07 V	43	60.5	41.6
3	5350.00	61.9 PK	74.0	-12.1	1.07 V	43	58.0	3.9
4	5350.00	47.7 AV	54.0	-6.3	1.07 V	43	43.8	3.9
5	#10540.00	48.2 PK	68.2	-20.0	2.61 V	162	36.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	97.9 PK			1.00 H	188	56.4	41.5
2	*5310.00	85.2 AV			1.00 H	188	43.7	41.5
3	5350.00	56.2 PK	74.0	-17.8	1.00 H	188	52.3	3.9
4	5350.00	44.2 AV	54.0	-9.8	1.00 H	188	40.3	3.9
5	10620.00	57.6 PK	74.0	-16.4	1.77 H	300	46.4	11.2
6	10620.00	44.2 AV	54.0	-9.8	1.77 H	300	33.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	109.7 PK			1.38 V	46	68.2	41.5
2	*5310.00	97.5 AV			1.38 V	46	56.0	41.5
3	5350.00	68.0 PK	74.0	-6.0	1.38 V	46	64.1	3.9
4	5350.00	52.4 AV	54.0	-1.6	1.38 V	46	48.5	3.9
5	10620.00	58.6 PK	74.0	-15.4	2.58 V	174	47.4	11.2
6	10620.00	48.3 AV	54.0	-5.7	2.58 V	174	37.1	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.9 PK	74.0	-18.1	1.21 H	207	51.8	4.1
2	5460.00	43.4 AV	54.0	-10.6	1.21 H	207	39.3	4.1
3	#5470.00	56.6 PK	68.2	-11.6	1.21 H	207	52.5	4.1
4	*5510.00	97.2 PK			1.21 H	207	55.2	42.0
5	*5510.00	84.6 AV			1.21 H	207	42.6	42.0
6	11020.00	56.8 PK	74.0	-17.2	1.80 H	292	45.4	11.4
7	11020.00	48.0 AV	54.0	-6.0	1.80 H	292	36.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.0 PK	74.0	-11.0	1.42 V	78	58.9	4.1
2	5460.00	48.1 AV	54.0	-5.9	1.42 V	78	44.0	4.1
3	#5470.00	66.5 PK	68.2	-1.7	1.42 V	78	62.4	4.1
4	*5510.00	113.7 PK			1.42 V	78	71.7	42.0
5	*5510.00	102.4 AV			1.42 V	78	60.4	42.0
6	11020.00	58.2 PK	74.0	-15.8	2.67 V	175	46.8	11.4
7	11020.00	48.4 AV	54.0	-5.6	2.67 V	175	37.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	101.9 PK			1.19 H	201	59.3	42.6
2	*5630.00	90.1 AV			1.19 H	201	47.5	42.6
3	11260.00	57.5 PK	74.0	-16.5	1.69 H	275	45.4	12.1
4	11260.00	48.7 AV	54.0	-5.3	1.69 H	275	36.6	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	117.0 PK			1.44 V	78	74.4	42.6
2	*5630.00	104.9 AV			1.44 V	78	62.3	42.6
3	11260.00	58.7 PK	74.0	-15.3	2.72 V	184	46.6	12.1
4	11260.00	49.5 AV	54.0	-4.5	2.72 V	184	37.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	100.5 PK			1.32 H	191	57.6	42.9
2	*5670.00	88.5 AV			1.32 H	191	45.6	42.9
3	#5725.00	56.2 PK	68.2	-12.0	1.32 H	191	50.6	5.6
4	11340.00	57.4 PK	74.0	-16.6	1.77 H	285	45.1	12.3
5	11340.00	48.7 AV	54.0	-5.3	1.77 H	285	36.4	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	114.0 PK			1.36 V	84	71.1	42.9
2	*5670.00	102.2 AV			1.36 V	84	59.3	42.9
3	#5725.00	66.6 PK	68.2	-1.6	1.36 V	84	61.0	5.6
4	11340.00	59.2 PK	74.0	-14.8	2.68 V	188	46.9	12.3
5	11340.00	49.2 AV	54.0	-4.8	2.68 V	188	36.9	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.4 PK	68.2	-12.8	1.31 H	192	51.3	4.1
2	*5710.00	103.5 PK			1.28 H	192	60.4	43.1
3	*5710.00	92.1 AV			1.28 H	192	49.0	43.1
4	#5850.00	57.4 PK	68.2	-10.8	1.31 H	192	51.6	5.8
5	11420.00	58.0 PK	74.0	-16.0	1.69 H	280	45.5	12.5
6	11420.00	49.1 AV	54.0	-4.9	1.69 H	280	36.6	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.0 PK	68.2	-11.2	1.30 V	80	52.9	4.1
2	*5710.00	117.3 PK			1.30 V	80	74.2	43.1
3	*5710.00	105.8 AV			1.30 V	80	62.7	43.1
4	#5850.00	58.8 PK	68.2	-9.4	1.30 V	80	53.0	5.8
5	11420.00	59.5 PK	74.0	-14.5	2.50 V	181	47.0	12.5
6	11420.00	49.9 AV	54.0	-4.1	2.50 V	181	37.4	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.60	59.9 PK	68.2	-8.3	1.22 H	236	54.8	5.1
2	*5755.00	105.1 PK			1.22 H	236	61.8	43.3
3	*5755.00	92.9 AV			1.22 H	236	49.6	43.3
4	#5995.20	61.7 PK	68.2	-6.5	1.22 H	236	55.8	5.9
5	11510.00	59.5 PK	74.0	-14.5	1.66 H	304	47.6	11.9
6	11510.00	48.3 AV	54.0	-5.7	1.66 H	304	36.4	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.40	62.2 PK	68.2	-6.0	1.58 V	87	57.1	5.1
2	*5755.00	116.6 PK			1.58 V	87	73.3	43.3
3	*5755.00	104.4 AV			1.58 V	87	61.1	43.3
4	#5928.80	61.8 PK	68.2	-6.4	1.58 V	87	55.9	5.9
5	11510.00	60.5 PK	74.0	-13.5	2.63 V	154	48.6	11.9
6	11510.00	49.4 AV	54.0	-4.6	2.63 V	154	37.5	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5632.40	59.7 PK	68.2	-8.5	1.21 H	235	54.7	5.0
2	*5795.00	105.8 PK			1.21 H	235	62.4	43.4
3	*5795.00	93.5 AV			1.21 H	235	50.1	43.4
4	#5963.60	61.4 PK	68.2	-6.8	1.21 H	235	55.6	5.8
5	11590.00	59.1 PK	74.0	-14.9	1.69 H	303	47.5	11.6
6	11590.00	48.0 AV	54.0	-6.0	1.69 H	303	36.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.20	61.2 PK	68.2	-7.0	1.58 V	90	56.1	5.1
2	*5795.00	117.2 PK			1.58 V	90	73.8	43.4
3	*5795.00	105.1 AV			1.58 V	90	61.7	43.4
4	#5981.60	62.0 PK	68.2	-6.2	1.58 V	90	56.2	5.8
5	11590.00	60.3 PK	74.0	-13.7	2.69 V	157	48.7	11.6
6	11590.00	49.1 AV	54.0	-4.9	2.69 V	157	37.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	1.07 H	205	53.4	4.2
2	5150.00	44.2 AV	54.0	-9.8	1.07 H	205	40.0	4.2
3	*5210.00	96.0 PK			1.07 H	205	54.1	41.9
4	*5210.00	83.9 AV			1.07 H	205	42.0	41.9
5	#10420.00	56.0 PK	68.2	-12.2	1.73 H	295	45.1	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	1.05 V	42	63.2	4.2
2	5150.00	52.4 AV	54.0	-1.6	1.05 V	42	48.2	4.2
3	*5210.00	107.9 PK			1.05 V	42	66.0	41.9
4	*5210.00	95.2 AV			1.05 V	42	53.3	41.9
5	#10420.00	57.4 PK	68.2	-10.8	2.53 V	158	46.5	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	94.3 PK			1.00 H	197	52.8	41.5
2	*5290.00	82.4 AV			1.00 H	197	40.9	41.5
3	5350.00	57.9 PK	74.0	-16.1	1.00 H	197	54.0	3.9
4	5350.00	44.7 AV	54.0	-9.3	1.00 H	197	40.8	3.9
5	#10580.00	57.8 PK	68.2	-10.4	1.83 H	318	46.5	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	107.0 PK			1.35 V	56	65.5	41.5
2	*5290.00	94.8 AV			1.35 V	56	53.3	41.5
3	5350.00	67.1 PK	74.0	-6.9	1.35 V	56	63.2	3.9
4	5350.00	52.3 AV	54.0	-1.7	1.35 V	56	48.4	3.9
5	#10580.00	48.3 PK	68.2	-19.9	2.51 V	173	37.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.6 PK	74.0	-17.4	1.04 H	191	52.5	4.1
2	5460.00	43.6 AV	54.0	-10.4	1.04 H	191	39.5	4.1
3	#5470.00	57.1 PK	68.2	-11.1	1.04 H	191	53.0	4.1
4	*5530.00	93.6 PK			1.04 H	191	51.6	42.0
5	*5530.00	82.0 AV			1.04 H	191	40.0	42.0
6	11060.00	56.5 PK	74.0	-17.5	1.74 H	290	45.0	11.5
7	11060.00	47.6 AV	54.0	-6.4	1.74 H	290	36.1	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.0 PK	74.0	-9.0	1.34 V	86	60.9	4.1
2	5460.00	51.3 AV	54.0	-2.7	1.34 V	86	47.2	4.1
3	#5470.00	66.7 PK	68.2	-1.5	1.34 V	86	62.6	4.1
4	*5530.00	108.8 PK			1.34 V	86	66.8	42.0
5	*5530.00	95.9 AV			1.34 V	86	53.9	42.0
6	11060.00	58.3 PK	74.0	-15.7	2.58 V	183	46.8	11.5
7	11060.00	48.6 AV	54.0	-5.4	2.58 V	183	37.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	100.0 PK			1.33 H	191	57.6	42.4
2	*5610.00	87.6 AV			1.33 H	191	45.2	42.4
3	#5725.00	57.4 PK	68.2	-10.8	1.33 H	191	51.8	5.6
4	11220.00	57.4 PK	74.0	-16.6	1.80 H	279	45.4	12.0
5	11220.00	48.2 AV	54.0	-5.8	1.80 H	279	36.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	112.9 PK			1.32 V	78	70.5	42.4
2	*5610.00	100.2 AV			1.32 V	78	57.8	42.4
3	#5725.00	66.7 PK	68.2	-1.5	1.32 V	78	61.1	5.6
4	11220.00	58.8 PK	74.0	-15.2	2.51 V	180	46.8	12.0
5	11220.00	49.2 AV	54.0	-4.8	2.51 V	180	37.2	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.9 PK	68.2	-12.3	1.23 H	191	51.8	4.1
2	*5690.00	101.6 PK			1.23 H	191	58.6	43.0
3	*5690.00	88.9 AV			1.23 H	191	45.9	43.0
4	#5850.00	59.3 PK	68.2	-8.9	1.23 H	191	53.5	5.8
5	11380.00	57.7 PK	74.0	-16.3	1.60 H	288	45.2	12.5
6	11380.00	49.0 AV	54.0	-5.0	1.60 H	288	36.5	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.2 PK	68.2	-11.0	1.23 V	84	53.1	4.1
2	*5690.00	114.3 PK			1.23 V	84	71.3	43.0
3	*5690.00	101.6 AV			1.23 V	84	58.6	43.0
4	#5850.00	62.8 PK	68.2	-5.4	1.23 V	84	57.0	5.8
5	11380.00	59.7 PK	74.0	-14.3	2.56 V	187	47.2	12.5
6	11380.00	50.0 AV	54.0	-4.0	2.56 V	187	37.5	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.20	61.2 PK	68.2	-7.0	1.26 H	238	56.2	5.0
2	*5775.00	102.2 PK			1.26 H	238	58.8	43.4
3	*5775.00	90.0 AV			1.26 H	238	46.6	43.4
4	#5945.60	62.4 PK	68.2	-5.8	1.26 H	238	56.6	5.8
5	11550.00	59.1 PK	74.0	-14.9	1.83 H	312	47.4	11.7
6	11550.00	48.0 AV	54.0	-6.0	1.83 H	312	36.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.00	66.4 PK	68.2	-1.8	1.59 V	79	61.3	5.1
2	*5775.00	114.0 PK			1.59 V	79	70.6	43.4
3	*5775.00	101.7 AV			1.59 V	79	58.3	43.4
4	#5925.20	64.2 PK	68.2	-4.0	1.59 V	79	58.3	5.9
5	11550.00	60.2 PK	74.0	-13.8	2.62 V	155	48.5	11.7
6	11550.00	49.1 AV	54.0	-4.9	2.62 V	155	37.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.27 H	233	55.1	4.2
2	5150.00	46.0 AV	54.0	-8.0	1.27 H	233	41.8	4.2
3	*5250.00	93.0 PK			1.27 H	233	51.3	41.7
4	*5250.00	80.9 AV			1.27 H	233	39.2	41.7
5	5350.00	61.7 PK	74.0	-12.3	1.27 H	233	57.8	3.9
6	5350.00	48.4 AV	54.0	-5.6	1.27 H	233	44.5	3.9
7	#10500.00	57.0 PK	68.2	-11.2	1.78 H	305	45.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.6 PK	74.0	-11.4	1.16 V	43	58.4	4.2
2	5150.00	50.6 AV	54.0	-3.4	1.16 V	43	46.4	4.2
3	*5250.00	104.0 PK			1.16 V	43	62.3	41.7
4	*5250.00	91.9 AV			1.16 V	43	50.2	41.7
5	5350.00	65.1 PK	74.0	-8.9	1.16 V	43	61.2	3.9
6	5350.00	52.4 AV	54.0	-1.6	1.16 V	43	48.5	3.9
7	#10500.00	58.5 PK	68.2	-9.7	2.68 V	157	47.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	1.24 H	290	54.8	4.2
2	5460.00	45.9 AV	54.0	-8.1	1.24 H	290	41.7	4.2
3	#5470.00	59.5 PK	68.2	-8.7	1.24 H	290	55.3	4.2
4	*5570.00	94.9 PK			1.24 H	290	52.7	42.2
5	*5570.00	82.5 AV			1.24 H	290	40.3	42.2
6	#5725.00	57.9 PK	68.2	-10.3	1.24 H	290	52.3	5.6
7	11140.00	57.2 PK	74.0	-16.8	1.78 H	301	45.4	11.8
8	11140.00	45.2 AV	54.0	-8.8	1.78 H	301	33.4	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.7 PK	74.0	-8.3	1.28 V	77	61.5	4.2
2	5460.00	52.4 AV	54.0	-1.6	1.28 V	77	48.2	4.2
3	#5470.00	66.3 PK	68.2	-1.9	1.28 V	77	62.1	4.2
4	*5570.00	106.4 PK			1.28 V	77	64.2	42.2
5	*5570.00	94.1 AV			1.28 V	77	51.9	42.2
6	#5725.00	65.5 PK	68.2	-2.7	1.28 V	77	59.9	5.6
7	11140.00	58.9 PK	74.0	-15.1	2.73 V	159	47.1	11.8
8	11140.00	46.4 AV	54.0	-7.6	2.73 V	159	34.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.7 PK	74.0	-17.3	1.27 H	198	52.2	4.5
2	5150.00	42.3 AV	54.0	-11.7	1.27 H	198	37.8	4.5
3	*5180.00	112.4 PK			1.27 H	198	70.0	42.4
4	*5180.00	101.7 AV			1.27 H	198	59.3	42.4
5	#10360.00	57.1 PK	68.2	-11.1	1.89 H	310	45.5	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	1.34 V	85	58.5	4.5
2	5150.00	45.0 AV	54.0	-9.0	1.34 V	85	40.5	4.5
3	*5180.00	121.8 PK			1.34 V	85	79.4	42.4
4	*5180.00	110.9 AV			1.34 V	85	68.5	42.4
5	#10360.00	59.0 PK	68.2	-9.2	2.63 V	164	47.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.1 PK			1.22 H	198	71.6	42.5
2	*5200.00	104.7 AV			1.22 H	198	62.2	42.5
3	#10400.00	56.9 PK	68.2	-11.3	1.88 H	300	45.6	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.2 PK			1.20 V	62	80.7	42.5
2	*5200.00	113.5 AV			1.20 V	62	71.0	42.5
3	#10400.00	58.5 PK	68.2	-9.7	2.62 V	158	47.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.1 PK			1.06 H	199	72.5	42.6
2	*5240.00	105.4 AV			1.06 H	199	62.8	42.6
3	5350.00	55.1 PK	74.0	-18.9	1.06 H	199	50.8	4.3
4	5350.00	42.5 AV	54.0	-11.5	1.06 H	199	38.2	4.3
5	#10480.00	56.9 PK	68.2	-11.3	1.81 H	313	45.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.6 PK			1.33 V	90	81.0	42.6
2	*5240.00	114.0 AV			1.33 V	90	71.4	42.6
3	5350.00	55.8 PK	74.0	-18.2	1.33 V	90	51.5	4.3
4	5350.00	44.0 AV	54.0	-10.0	1.33 V	90	39.7	4.3
5	#10480.00	58.6 PK	68.2	-9.6	2.61 V	155	47.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	1.16 H	199	50.4	4.5
2	5150.00	42.5 AV	54.0	-11.5	1.16 H	199	38.0	4.5
3	*5260.00	114.9 PK			1.16 H	199	72.3	42.6
4	*5260.00	106.2 AV			1.16 H	199	63.6	42.6
5	#10520.00	57.0 PK	68.2	-11.2	1.82 H	312	45.7	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	1.85 V	76	51.5	4.5
2	5150.00	43.4 AV	54.0	-10.6	1.85 V	76	38.9	4.5
3	*5260.00	124.8 PK			1.85 V	76	82.2	42.6
4	*5260.00	115.6 AV			1.85 V	76	73.0	42.6
5	#10520.00	58.3 PK	68.2	-9.9	2.55 V	157	47.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.7 PK			1.20 H	198	71.1	42.6
2	*5300.00	106.8 AV			1.20 H	198	64.2	42.6
3	10600.00	56.1 PK	74.0	-17.9	2.61 H	159	45.1	11.0
4	10600.00	47.0 AV	54.0	-7.0	2.61 H	159	36.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	125.3 PK			1.82 V	71	82.7	42.6
2	*5300.00	116.2 AV			1.82 V	71	73.6	42.6
3	10600.00	58.5 PK	74.0	-15.5	1.77 V	312	47.5	11.0
4	10600.00	48.6 AV	54.0	-5.4	1.77 V	312	37.6	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.2 PK			1.03 H	200	70.7	42.5
2	*5320.00	102.9 AV			1.03 H	200	60.4	42.5
3	5350.00	61.8 PK	74.0	-12.2	1.03 H	200	57.5	4.3
4	5350.00	44.3 AV	54.0	-9.7	1.03 H	200	40.0	4.3
5	10640.00	56.2 PK	74.0	-17.8	2.66 H	157	45.2	11.0
6	10640.00	47.3 AV	54.0	-6.7	2.66 H	157	36.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.5 PK			1.69 V	72	81.0	42.5
2	*5320.00	112.9 AV			1.69 V	72	70.4	42.5
3	5350.00	71.8 PK	74.0	-2.2	1.69 V	72	67.5	4.3
4	5350.00	48.7 AV	54.0	-5.3	1.69 V	72	44.4	4.3
5	10640.00	58.0 PK	74.0	-16.0	1.88 V	310	47.0	11.0
6	10640.00	47.9 AV	54.0	-6.1	1.88 V	310	36.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.1 PK	74.0	-13.9	1.30 H	203	55.5	4.6
2	5460.00	42.2 AV	54.0	-11.8	1.30 H	203	37.6	4.6
3	#5470.00	56.8 PK	68.2	-11.4	1.30 H	203	52.2	4.6
4	*5500.00	110.6 PK			1.30 H	203	67.9	42.7
5	*5500.00	100.7 AV			1.30 H	203	58.0	42.7
6	11000.00	56.9 PK	74.0	-17.1	2.61 H	157	45.3	11.6
7	11000.00	48.0 AV	54.0	-6.0	2.61 H	157	36.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	71.1 PK	74.0	-2.9	1.77 V	94	66.5	4.6
2	5460.00	45.2 AV	54.0	-8.8	1.77 V	94	40.6	4.6
3	#5470.00	66.6 PK	68.2	-1.6	1.77 V	94	62.0	4.6
4	*5500.00	122.7 PK			1.77 V	94	80.0	42.7
5	*5500.00	112.5 AV			1.77 V	94	69.8	42.7
6	11000.00	58.7 PK	74.0	-15.3	1.75 V	310	47.1	11.6
7	11000.00	49.1 AV	54.0	-4.9	1.75 V	310	37.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	116.1 PK			1.23 H	189	73.1	43.0
2	*5600.00	106.4 AV			1.23 H	189	63.4	43.0
3	11200.00	59.5 PK	74.0	-14.5	2.56 H	47	47.7	11.8
4	11200.00	46.4 AV	54.0	-7.6	2.56 H	47	34.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	128.7 PK			1.81 V	93	85.7	43.0
2	*5600.00	119.1 AV			1.81 V	93	76.1	43.0
3	11200.00	60.4 PK	74.0	-13.6	2.34 V	189	48.6	11.8
4	11200.00	48.5 AV	54.0	-5.5	2.34 V	189	36.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.1 PK			1.64 H	209	67.2	43.9
2	*5700.00	98.9 AV			1.64 H	209	55.0	43.9
3	#5725.00	57.4 PK	68.2	-10.8	1.64 H	209	51.6	5.8
4	11400.00	57.4 PK	74.0	-16.6	2.55 H	152	45.2	12.2
5	11400.00	48.3 AV	54.0	-5.7	2.55 H	152	36.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	122.8 PK			1.64 V	87	78.9	43.9
2	*5700.00	110.9 AV			1.64 V	87	67.0	43.9
3	#5725.00	66.7 PK	68.2	-1.5	1.64 V	87	60.9	5.8
4	11400.00	59.4 PK	74.0	-14.6	1.62 V	307	47.2	12.2
5	11400.00	49.3 AV	54.0	-4.7	1.62 V	307	37.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.1 PK	68.2	-13.1	1.68 H	205	50.5	4.6
2	*5720.00	113.9 PK			1.68 H	205	70.1	43.8
3	*5720.00	105.8 AV			1.68 H	205	62.0	43.8
4	#5850.00	57.4 PK	68.2	-10.8	1.68 H	205	51.2	6.2
5	11440.00	57.3 PK	74.0	-16.7	2.62 H	155	45.1	12.2
6	11440.00	48.5 AV	54.0	-5.5	2.62 H	155	36.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.1 PK	68.2	-12.1	1.70 V	84	51.5	4.6
2	*5720.00	126.5 PK			1.70 V	84	82.7	43.8
3	*5720.00	118.3 AV			1.70 V	84	74.5	43.8
4	#5850.00	57.7 PK	68.2	-10.5	1.70 V	84	51.5	6.2
5	11440.00	59.2 PK	74.0	-14.8	1.66 V	290	47.0	12.2
6	11440.00	49.1 AV	54.0	-4.9	1.66 V	290	36.9	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.80	60.9 PK	68.2	-7.3	1.60 H	209	55.7	5.2
2	*5745.00	114.5 PK			1.60 H	209	70.8	43.7
3	*5745.00	106.4 AV			1.60 H	209	62.7	43.7
4	#5968.80	61.7 PK	68.2	-6.5	1.60 H	209	55.8	5.9
5	11490.00	58.1 PK	74.0	-15.9	2.66 H	158	45.8	12.3
6	11490.00	49.1 AV	54.0	-4.9	2.66 H	158	36.8	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.40	61.4 PK	68.2	-6.8	1.73 V	90	56.0	5.4
2	*5745.00	126.6 PK			1.73 V	90	82.9	43.7
3	*5745.00	118.2 AV			1.73 V	90	74.5	43.7
4	#5974.80	62.0 PK	68.2	-6.2	1.73 V	90	55.9	6.1
5	11490.00	60.3 PK	74.0	-13.7	1.77 V	305	48.0	12.3
6	11490.00	49.9 AV	54.0	-4.1	1.77 V	305	37.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.00	60.9 PK	68.2	-7.3	1.69 H	211	55.7	5.2
2	*5785.00	114.8 PK			1.69 H	211	70.8	44.0
3	*5785.00	107.2 AV			1.69 H	211	63.2	44.0
4	#5974.40	61.4 PK	68.2	-6.8	1.69 H	211	55.3	6.1
5	11570.00	58.1 PK	74.0	-15.9	2.55 H	152	45.5	12.6
6	11570.00	48.9 AV	54.0	-5.1	2.55 H	152	36.3	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.80	61.8 PK	68.2	-6.4	1.75 V	86	56.2	5.6
2	*5785.00	126.9 PK			1.75 V	86	82.9	44.0
3	*5785.00	119.7 AV			1.75 V	86	75.7	44.0
4	#5940.00	62.6 PK	68.2	-5.6	1.75 V	86	56.8	5.8
5	11570.00	60.4 PK	74.0	-13.6	1.65 V	306	47.8	12.6
6	11570.00	49.9 AV	54.0	-4.1	1.65 V	306	37.3	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5608.00	61.7 PK	68.2	-6.5	1.64 H	211	56.6	5.1
2	*5825.00	114.4 PK			1.64 H	211	70.2	44.2
3	*5825.00	106.7 AV			1.64 H	211	62.5	44.2
4	#5969.20	62.7 PK	68.2	-5.5	1.64 H	211	56.8	5.9
5	11650.00	57.4 PK	74.0	-16.6	2.71 H	144	45.0	12.4
6	11650.00	48.4 AV	54.0	-5.6	2.71 H	144	36.0	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.60	60.5 PK	68.2	-7.7	1.72 V	105	54.9	5.6
2	*5825.00	126.9 PK			1.72 V	105	82.7	44.2
3	*5825.00	119.0 AV			1.72 V	105	74.8	44.2
4	#5946.40	62.5 PK	68.2	-5.7	1.72 V	105	56.7	5.8
5	11650.00	60.1 PK	74.0	-13.9	1.77 V	301	47.7	12.4
6	11650.00	50.2 AV	54.0	-3.8	1.77 V	301	37.8	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.0 PK	74.0	-16.0	1.30 H	198	53.5	4.5
2	5150.00	43.0 AV	54.0	-11.0	1.30 H	198	38.5	4.5
3	*5180.00	110.7 PK			1.30 H	198	68.3	42.4
4	*5180.00	99.7 AV			1.30 H	198	57.3	42.4
5	#10360.00	57.0 PK	68.2	-11.2	1.88 H	311	45.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.5 PK	74.0	-9.5	1.46 V	84	60.0	4.5
2	5150.00	45.1 AV	54.0	-8.9	1.46 V	84	40.6	4.5
3	*5180.00	119.6 PK			1.46 V	84	77.2	42.4
4	*5180.00	108.9 AV			1.46 V	84	66.5	42.4
5	#10360.00	58.9 PK	68.2	-9.3	2.66 V	167	47.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	112.2 PK			1.20 H	195	69.7	42.5
2	*5200.00	102.6 AV			1.20 H	195	60.1	42.5
3	#10400.00	56.6 PK	68.2	-11.6	1.70 H	311	45.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	120.3 PK			1.22 V	74	77.8	42.5
2	*5200.00	111.0 AV			1.22 V	74	68.5	42.5
3	#10400.00	58.2 PK	68.2	-10.0	2.60 V	156	46.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.4 PK			1.02 H	201	70.8	42.6
2	*5240.00	103.1 AV			1.02 H	201	60.5	42.6
3	5350.00	54.9 PK	74.0	-19.1	1.02 H	201	50.6	4.3
4	5350.00	42.3 AV	54.0	-11.7	1.02 H	201	38.0	4.3
5	#10480.00	57.0 PK	68.2	-11.2	1.83 H	310	45.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.6 PK			1.48 V	63	79.0	42.6
2	*5240.00	112.4 AV			1.48 V	63	69.8	42.6
3	5350.00	55.3 PK	74.0	-18.7	1.48 V	63	51.0	4.3
4	5350.00	43.5 AV	54.0	-10.5	1.48 V	63	39.2	4.3
5	#10480.00	58.5 PK	68.2	-9.7	2.52 V	150	47.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.0 PK	74.0	-19.0	1.27 H	200	50.5	4.5
2	5150.00	42.7 AV	54.0	-11.3	1.27 H	200	38.2	4.5
3	*5260.00	112.7 PK			1.27 H	200	70.1	42.6
4	*5260.00	104.2 AV			1.27 H	200	61.6	42.6
5	#10520.00	56.7 PK	68.2	-11.5	1.82 H	317	45.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	1.86 V	70	51.6	4.5
2	5150.00	43.7 AV	54.0	-10.3	1.86 V	70	39.2	4.5
3	*5260.00	123.5 PK			1.86 V	70	80.9	42.6
4	*5260.00	113.1 AV			1.86 V	70	70.5	42.6
5	#10520.00	58.6 PK	68.2	-9.6	2.62 V	151	47.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.1 PK			1.16 H	193	69.5	42.6
2	*5300.00	104.9 AV			1.16 H	193	62.3	42.6
3	10600.00	56.3 PK	74.0	-17.7	2.66 H	160	45.3	11.0
4	10600.00	47.2 AV	54.0	-6.8	2.66 H	160	36.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.9 PK			1.88 V	68	80.3	42.6
2	*5300.00	113.7 AV			1.88 V	68	71.1	42.6
3	10600.00	58.2 PK	74.0	-15.8	1.80 V	302	47.2	11.0
4	10600.00	48.2 AV	54.0	-5.8	1.80 V	302	37.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.5 PK			1.22 H	199	69.0	42.5
2	*5320.00	100.8 AV			1.22 H	199	58.3	42.5
3	5350.00	60.2 PK	74.0	-13.8	1.22 H	199	55.9	4.3
4	5350.00	44.3 AV	54.0	-9.7	1.22 H	199	40.0	4.3
5	10640.00	56.1 PK	74.0	-17.9	2.61 H	167	45.1	11.0
6	10640.00	46.9 AV	54.0	-7.1	2.61 H	167	35.9	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	121.6 PK			1.68 V	71	79.1	42.5
2	*5320.00	110.5 AV			1.68 V	71	68.0	42.5
3	5350.00	69.3 PK	74.0	-4.7	1.68 V	71	65.0	4.3
4	5350.00	49.3 AV	54.0	-4.7	1.68 V	71	45.0	4.3
5	10640.00	58.1 PK	74.0	-15.9	1.81 V	306	47.1	11.0
6	10640.00	48.2 AV	54.0	-5.8	1.81 V	306	37.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.6 PK	74.0	-13.4	1.29 H	201	56.0	4.6
2	5460.00	43.5 AV	54.0	-10.5	1.29 H	201	38.9	4.6
3	#5470.00	64.6 PK	68.2	-3.6	1.29 H	201	60.0	4.6
4	*5500.00	104.7 PK			1.29 H	201	62.0	42.7
5	*5500.00	95.9 AV			1.29 H	201	53.2	42.7
6	11000.00	57.0 PK	74.0	-17.0	2.67 H	170	45.4	11.6
7	11000.00	47.7 AV	54.0	-6.3	2.67 H	170	36.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.8 PK	74.0	-11.2	1.78 V	85	58.2	4.6
2	5460.00	42.9 AV	54.0	-11.1	1.78 V	85	38.3	4.6
3	#5470.00	66.6 PK	68.2	-1.6	1.78 V	85	62.0	4.6
4	*5500.00	119.5 PK			1.78 V	85	76.8	42.7
5	*5500.00	107.5 AV			1.78 V	85	64.8	42.7
6	11000.00	58.3 PK	74.0	-15.7	1.74 V	308	46.7	11.6
7	11000.00	48.1 AV	54.0	-5.9	1.74 V	308	36.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.3 PK			1.24 H	193	70.3	43.0
2	*5600.00	103.5 AV			1.24 H	193	60.5	43.0
3	11200.00	59.4 PK	74.0	-14.6	2.58 H	42	47.6	11.8
4	11200.00	46.4 AV	54.0	-7.6	2.58 H	42	34.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	126.4 PK			1.83 V	50	83.4	43.0
2	*5600.00	116.6 AV			1.83 V	50	73.6	43.0
3	11200.00	60.3 PK	74.0	-13.7	2.31 V	188	48.5	11.8
4	11200.00	48.4 AV	54.0	-5.6	2.31 V	188	36.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.1 PK			1.71 H	209	64.2	43.9
2	*5700.00	96.1 AV			1.71 H	209	52.2	43.9
3	#5725.00	57.6 PK	68.2	-10.6	1.71 H	209	51.8	5.8
4	11400.00	57.6 PK	74.0	-16.4	2.52 H	152	45.4	12.2
5	11400.00	48.2 AV	54.0	-5.8	2.52 H	152	36.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.6 PK			1.64 V	85	76.7	43.9
2	*5700.00	108.0 AV			1.64 V	85	64.1	43.9
3	#5725.00	66.3 PK	68.2	-1.9	1.64 V	85	60.5	5.8
4	11400.00	59.3 PK	74.0	-14.7	1.73 V	300	47.1	12.2
5	11400.00	49.2 AV	54.0	-4.8	1.73 V	300	37.0	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.4 PK	68.2	-12.8	1.86 H	210	50.8	4.6
2	*5720.00	112.8 PK			1.86 H	210	69.0	43.8
3	*5720.00	104.1 AV			1.86 H	210	60.3	43.8
4	#5850.00	56.5 PK	68.2	-11.7	1.86 H	210	50.3	6.2
5	11440.00	57.5 PK	74.0	-16.5	2.55 H	157	45.3	12.2
6	11440.00	48.7 AV	54.0	-5.3	2.55 H	157	36.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.1 PK	68.2	-12.1	1.71 V	89	51.5	4.6
2	*5720.00	124.8 PK			1.71 V	89	81.0	43.8
3	*5720.00	116.6 AV			1.71 V	89	72.8	43.8
4	#5850.00	57.4 PK	68.2	-10.8	1.71 V	89	51.2	6.2
5	11440.00	59.6 PK	74.0	-14.4	1.63 V	318	47.4	12.2
6	11440.00	49.7 AV	54.0	-4.3	1.63 V	318	37.5	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.40	62.5 PK	68.2	-5.7	1.63 H	215	57.2	5.3
2	*5745.00	112.7 PK			1.63 H	215	69.0	43.7
3	*5745.00	104.4 AV			1.63 H	215	60.7	43.7
4	#5968.40	63.0 PK	68.2	-5.2	1.63 H	215	57.1	5.9
5	11490.00	57.6 PK	74.0	-16.4	2.61 H	160	45.3	12.3
6	11490.00	48.3 AV	54.0	-5.7	2.61 H	160	36.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.60	61.3 PK	68.2	-6.9	1.57 V	85	55.6	5.7
2	*5745.00	124.8 PK			1.57 V	85	81.1	43.7
3	*5745.00	115.9 AV			1.57 V	85	72.2	43.7
4	#5932.80	61.5 PK	68.2	-6.7	1.57 V	85	55.6	5.9
5	11490.00	60.0 PK	74.0	-14.0	1.72 V	306	47.7	12.3
6	11490.00	49.9 AV	54.0	-4.1	1.72 V	306	37.6	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.60	61.7 PK	68.2	-6.5	1.78 H	210	56.1	5.6
2	*5785.00	113.0 PK			1.78 H	210	69.0	44.0
3	*5785.00	104.8 AV			1.78 H	210	60.8	44.0
4	#5976.40	61.6 PK	68.2	-6.6	1.78 H	210	55.5	6.1
5	11570.00	57.8 PK	74.0	-16.2	2.71 H	163	45.2	12.6
6	11570.00	48.9 AV	54.0	-5.1	2.71 H	163	36.3	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.60	61.5 PK	68.2	-6.7	1.75 V	86	55.8	5.7
2	*5785.00	126.2 PK			1.75 V	86	82.2	44.0
3	*5785.00	117.8 AV			1.75 V	86	73.8	44.0
4	#5957.20	62.7 PK	68.2	-5.5	1.75 V	86	56.8	5.9
5	11570.00	60.1 PK	74.0	-13.9	1.70 V	301	47.5	12.6
6	11570.00	50.0 AV	54.0	-4.0	1.70 V	301	37.4	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.20	60.5 PK	68.2	-7.7	1.67 H	210	55.3	5.2
2	*5825.00	112.9 PK			1.67 H	210	68.7	44.2
3	*5825.00	104.7 AV			1.67 H	210	60.5	44.2
4	#5985.20	61.6 PK	68.2	-6.6	1.67 H	210	55.5	6.1
5	11650.00	57.5 PK	74.0	-16.5	2.65 H	150	45.1	12.4
6	11650.00	48.5 AV	54.0	-5.5	2.65 H	150	36.1	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5608.40	60.5 PK	68.2	-7.7	1.75 V	88	55.4	5.1
2	*5825.00	125.2 PK			1.75 V	88	81.0	44.2
3	*5825.00	116.8 AV			1.75 V	88	72.6	44.2
4	#5975.20	62.3 PK	68.2	-5.9	1.75 V	88	56.2	6.1
5	11650.00	59.7 PK	74.0	-14.3	1.72 V	303	47.3	12.4
6	11650.00	49.7 AV	54.0	-4.3	1.72 V	303	37.3	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.1 PK	74.0	-14.9	1.22 H	198	54.6	4.5
2	5150.00	42.5 AV	54.0	-11.5	1.22 H	198	38.0	4.5
3	*5180.00	110.1 PK			1.22 H	198	67.7	42.4
4	*5180.00	97.4 AV			1.22 H	198	55.0	42.4
5	#10360.00	56.8 PK	68.2	-11.4	1.83 H	309	45.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	64.8 PK	74.0	-9.2	1.44 V	80	60.3	4.5
2	5150.00	45.2 AV	54.0	-8.8	1.44 V	80	40.7	4.5
3	*5180.00	118.6 PK			1.44 V	80	76.2	42.4
4	*5180.00	106.3 AV			1.44 V	80	63.9	42.4
5	#10360.00	58.6 PK	68.2	-9.6	2.50 V	158	47.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.0 PK			1.21 H	190	67.5	42.5
2	*5200.00	100.4 AV			1.21 H	190	57.9	42.5
3	#10400.00	58.2 PK	68.2	-10.0	2.68 H	153	46.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	117.7 PK			1.36 V	66	75.2	42.5
2	*5200.00	108.7 AV			1.36 V	66	66.2	42.5
3	#10400.00	58.2 PK	68.2	-10.0	2.68 V	153	46.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	111.5 PK			1.16 H	194	68.9	42.6
2	*5240.00	100.6 AV			1.16 H	194	58.0	42.6
3	5350.00	54.4 PK	74.0	-19.6	1.16 H	194	50.1	4.3
4	5350.00	41.8 AV	54.0	-12.2	1.16 H	194	37.5	4.3
5	#10480.00	56.8 PK	68.2	-11.4	1.78 H	303	45.4	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.3 PK			1.41 V	74	77.7	42.6
2	*5240.00	109.6 AV			1.41 V	74	67.0	42.6
3	5350.00	55.5 PK	74.0	-18.5	1.41 V	74	51.2	4.3
4	5350.00	43.2 AV	54.0	-10.8	1.41 V	74	38.9	4.3
5	#10480.00	58.5 PK	68.2	-9.7	2.67 V	162	47.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.2 PK	74.0	-18.8	1.22 H	195	50.7	4.5
2	5150.00	42.9 AV	54.0	-11.1	1.22 H	195	38.4	4.5
3	*5260.00	112.9 PK			1.22 H	195	70.3	42.6
4	*5260.00	101.6 AV			1.22 H	195	59.0	42.6
5	#10520.00	56.8 PK	68.2	-11.4	1.72 H	305	45.5	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.82 V	75	51.7	4.5
2	5150.00	44.0 AV	54.0	-10.0	1.82 V	75	39.5	4.5
3	*5260.00	121.2 PK			1.82 V	75	78.6	42.6
4	*5260.00	110.6 AV			1.82 V	75	68.0	42.6
5	#10520.00	58.4 PK	68.2	-9.8	2.50 V	162	47.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	110.4 PK			1.19 H	203	67.8	42.6
2	*5300.00	102.6 AV			1.19 H	203	60.0	42.6
3	10600.00	56.4 PK	74.0	-17.6	1.72 H	314	45.4	11.0
4	10600.00	47.1 AV	54.0	-6.9	1.72 H	314	36.1	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.2 PK			1.81 V	76	78.6	42.6
2	*5300.00	111.3 AV			1.81 V	76	68.7	42.6
3	10600.00	58.3 PK	74.0	-15.7	1.77 V	300	47.3	11.0
4	10600.00	48.3 AV	54.0	-5.7	1.77 V	300	37.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.9 PK			1.17 H	199	67.4	42.5
2	*5320.00	98.0 AV			1.17 H	199	55.5	42.5
3	5350.00	58.1 PK	74.0	-15.9	1.17 H	199	53.8	4.3
4	5350.00	43.3 AV	54.0	-10.7	1.17 H	199	39.0	4.3
5	10640.00	56.2 PK	74.0	-17.8	2.55 H	167	45.2	11.0
6	10640.00	47.3 AV	54.0	-6.7	2.55 H	167	36.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.0 PK			1.71 V	77	77.5	42.5
2	*5320.00	107.7 AV			1.71 V	77	65.2	42.5
3	5350.00	68.8 PK	74.0	-5.2	1.71 V	77	64.5	4.3
4	5350.00	49.0 AV	54.0	-5.0	1.71 V	77	44.7	4.3
5	10640.00	58.0 PK	74.0	-16.0	1.71 V	305	47.0	11.0
6	10640.00	48.0 AV	54.0	-6.0	1.71 V	305	37.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.1 PK	74.0	-18.9	1.28 H	201	50.5	4.6
2	5460.00	42.3 AV	54.0	-11.7	1.28 H	201	37.7	4.6
3	#5470.00	56.6 PK	68.2	-11.6	1.28 H	201	52.0	4.6
4	*5500.00	108.7 PK			1.28 H	201	66.0	42.7
5	*5500.00	96.9 AV			1.28 H	201	54.2	42.7
6	11000.00	56.6 PK	74.0	-17.4	2.69 H	162	45.0	11.6
7	11000.00	47.7 AV	54.0	-6.3	2.69 H	162	36.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.6 PK	74.0	-14.4	1.71 V	96	55.0	4.6
2	5460.00	44.6 AV	54.0	-9.4	1.71 V	96	40.0	4.6
3	#5470.00	66.7 PK	68.2	-1.5	1.71 V	94	62.1	4.6
4	*5500.00	119.5 PK			1.71 V	96	76.8	42.7
5	*5500.00	107.6 AV			1.71 V	96	64.9	42.7
6	11000.00	58.4 PK	74.0	-15.6	1.77 V	308	46.8	11.6
7	11000.00	48.4 AV	54.0	-5.6	1.77 V	308	36.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.6 PK			1.26 H	192	70.6	43.0
2	*5600.00	102.7 AV			1.26 H	192	59.7	43.0
3	11200.00	59.3 PK	74.0	-14.7	2.55 H	49	47.5	11.8
4	11200.00	46.1 AV	54.0	-7.9	2.55 H	49	34.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	125.8 PK			1.80 V	94	82.8	43.0
2	*5600.00	115.5 AV			1.80 V	94	72.5	43.0
3	11200.00	60.2 PK	74.0	-13.8	2.26 V	184	48.4	11.8
4	11200.00	48.1 AV	54.0	-5.9	2.26 V	184	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.7 PK			1.58 H	209	61.8	43.9
2	*5700.00	94.1 AV			1.58 H	209	50.2	43.9
3	#5725.00	58.3 PK	68.2	-9.9	1.58 H	209	52.5	5.8
4	11400.00	57.4 PK	74.0	-16.6	2.55 H	156	45.2	12.2
5	11400.00	48.0 AV	54.0	-6.0	2.55 H	156	35.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.5 PK			1.78 V	87	74.6	43.9
2	*5700.00	106.5 AV			1.78 V	87	62.6	43.9
3	#5725.00	66.7 PK	68.2	-1.5	1.78 V	87	60.9	5.8
4	11400.00	59.2 PK	74.0	-14.8	1.75 V	311	47.0	12.2
5	11400.00	49.3 AV	54.0	-4.7	1.75 V	311	37.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.4 PK	68.2	-12.8	1.86 H	200	50.8	4.6
2	*5720.00	110.0 PK			1.86 H	200	66.2	43.8
3	*5720.00	100.9 AV			1.86 H	200	57.1	43.8
4	#5850.00	56.8 PK	68.2	-11.4	1.86 H	200	50.6	6.2
5	11440.00	57.7 PK	74.0	-16.3	2.77 H	163	45.5	12.2
6	11440.00	48.5 AV	54.0	-5.5	2.77 H	163	36.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.0 PK	68.2	-12.2	1.65 V	88	51.4	4.6
2	*5720.00	123.3 PK			1.65 V	88	79.5	43.8
3	*5720.00	113.3 AV			1.65 V	88	69.5	43.8
4	#5850.00	57.5 PK	68.2	-10.7	1.65 V	88	51.3	6.2
5	11440.00	59.4 PK	74.0	-14.6	1.88 V	320	47.2	12.2
6	11440.00	49.7 AV	54.0	-4.3	1.88 V	320	37.5	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.40	60.6 PK	68.2	-7.6	1.70 H	209	55.5	5.1
2	*5745.00	112.1 PK			1.70 H	209	68.4	43.7
3	*5745.00	101.1 AV			1.70 H	209	57.4	43.7
4	#5942.00	62.1 PK	68.2	-6.1	1.70 H	209	56.3	5.8
5	11490.00	58.0 PK	74.0	-16.0	2.69 H	152	45.7	12.3
6	11490.00	48.5 AV	54.0	-5.5	2.69 H	152	36.2	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.60	61.2 PK	68.2	-7.0	1.62 V	81	55.6	5.6
2	*5745.00	123.5 PK			1.62 V	81	79.8	43.7
3	*5745.00	113.0 AV			1.62 V	81	69.3	43.7
4	#5962.00	62.7 PK	68.2	-5.5	1.62 V	81	56.8	5.9
5	11490.00	59.9 PK	74.0	-14.1	1.66 V	301	47.6	12.3
6	11490.00	50.0 AV	54.0	-4.0	1.66 V	301	37.7	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.80	61.1 PK	68.2	-7.1	1.72 H	206	55.9	5.2
2	*5785.00	111.2 PK			1.72 H	206	67.2	44.0
3	*5785.00	101.8 AV			1.72 H	206	57.8	44.0
4	#5980.40	63.0 PK	68.2	-5.2	1.72 H	206	56.9	6.1
5	11570.00	58.2 PK	74.0	-15.8	2.58 H	159	45.6	12.6
6	11570.00	49.1 AV	54.0	-4.9	2.58 H	159	36.5	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.20	62.2 PK	68.2	-6.0	1.84 V	88	57.0	5.2
2	*5785.00	124.8 PK			1.84 V	88	80.8	44.0
3	*5785.00	114.1 AV			1.84 V	88	70.1	44.0
4	#5946.00	62.1 PK	68.2	-6.1	1.84 V	88	56.3	5.8
5	11570.00	60.1 PK	74.0	-13.9	1.72 V	311	47.5	12.6
6	11570.00	50.1 AV	54.0	-3.9	1.72 V	311	37.5	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.60	61.0 PK	68.2	-7.2	1.58 H	210	55.6	5.4
2	*5825.00	110.8 PK			1.58 H	210	66.6	44.2
3	*5825.00	101.4 AV			1.58 H	210	57.2	44.2
4	#5966.00	62.0 PK	68.2	-6.2	1.58 H	210	56.1	5.9
5	11650.00	58.1 PK	74.0	-15.9	2.60 H	251	45.7	12.4
6	11650.00	48.6 AV	54.0	-5.4	2.60 H	251	36.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.80	61.1 PK	68.2	-7.1	1.61 V	111	55.9	5.2
2	*5825.00	123.4 PK			1.61 V	111	79.2	44.2
3	*5825.00	114.2 AV			1.61 V	111	70.0	44.2
4	#5943.20	63.3 PK	68.2	-4.9	1.61 V	111	57.5	5.8
5	11650.00	59.9 PK	74.0	-14.1	1.70 V	307	47.5	12.4
6	11650.00	49.5 AV	54.0	-4.5	1.70 V	307	37.1	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.2 PK			2.78 H	261	70.6	42.6
2	*5240.00	102.7 AV			2.78 H	261	60.1	42.6
3	5350.00	55.4 PK	74.0	-18.6	2.78 H	261	51.1	4.3
4	5350.00	43.8 AV	54.0	-10.2	2.78 H	261	39.5	4.3
5	#10480.00	57.5 PK	68.2	-10.7	1.77 H	315	46.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.3 PK			1.62 V	90	80.7	42.6
2	*5240.00	112.8 AV			1.62 V	90	70.2	42.6
3	5350.00	56.5 PK	74.0	-17.5	1.62 V	90	52.2	4.3
4	5350.00	44.7 AV	54.0	-9.3	1.62 V	90	40.4	4.3
5	#10480.00	58.4 PK	68.2	-9.8	2.63 V	157	47.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.8 PK			2.69 H	260	70.2	42.6
2	*5300.00	101.8 AV			2.69 H	260	59.2	42.6
3	10600.00	56.4 PK	74.0	-17.6	1.88 H	312	45.4	11.0
4	10600.00	47.7 AV	54.0	-6.3	1.88 H	312	36.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.5 PK			1.69 V	78	78.9	42.6
2	*5300.00	111.3 AV			1.69 V	78	68.7	42.6
3	10600.00	58.2 PK	74.0	-15.8	2.66 V	170	47.2	11.0
4	10600.00	48.1 AV	54.0	-5.9	2.66 V	170	37.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	115.1 PK			2.64 H	258	72.1	43.0
2	*5600.00	105.1 AV			2.64 H	258	62.1	43.0
3	11200.00	57.3 PK	74.0	-16.7	1.93 H	310	45.5	11.8
4	11200.00	48.6 AV	54.0	-5.4	1.93 H	310	36.8	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.6 PK			1.61 V	84	81.6	43.0
2	*5600.00	114.8 AV			1.61 V	84	71.8	43.0
3	11200.00	59.1 PK	74.0	-14.9	2.66 V	160	47.3	11.8
4	11200.00	49.2 AV	54.0	-4.8	2.66 V	160	37.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5612.00	60.6 PK	68.2	-7.6	2.70 H	253	55.4	5.2
2	*5785.00	116.2 PK			2.70 H	253	72.2	44.0
3	*5785.00	107.2 AV			2.70 H	253	63.2	44.0
4	#5955.20	61.4 PK	68.2	-6.8	2.70 H	253	55.6	5.8
5	11570.00	61.0 PK	74.0	-13.0	1.84 H	316	48.4	12.6
6	11570.00	49.4 AV	54.0	-4.6	1.84 H	316	36.8	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5633.60	61.1 PK	68.2	-7.1	1.81 V	102	55.7	5.4
2	*5785.00	125.8 PK			1.81 V	102	81.8	44.0
3	*5785.00	116.8 AV			1.81 V	102	72.8	44.0
4	#5937.20	62.2 PK	68.2	-6.0	1.81 V	102	56.3	5.9
5	11570.00	62.2 PK	74.0	-11.8	2.66 V	172	49.6	12.6
6	11570.00	50.6 AV	54.0	-3.4	2.66 V	172	38.0	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.8 PK			2.78 H	257	68.2	42.6
2	*5240.00	101.1 AV			2.78 H	257	58.5	42.6
3	5350.00	55.3 PK	74.0	-18.7	2.78 H	257	51.0	4.3
4	5350.00	43.3 AV	54.0	-10.7	2.78 H	257	39.0	4.3
5	#10480.00	56.9 PK	68.2	-11.3	1.77 H	310	45.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	121.0 PK			1.60 V	92	78.4	42.6
2	*5240.00	109.2 AV			1.60 V	92	66.6	42.6
3	5350.00	56.4 PK	74.0	-17.6	1.60 V	92	52.1	4.3
4	5350.00	44.8 AV	54.0	-9.2	1.60 V	92	40.5	4.3
5	#10480.00	58.4 PK	68.2	-9.8	2.66 V	152	47.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	111.6 PK			2.77 H	263	69.0	42.6
2	*5300.00	100.7 AV			2.77 H	263	58.1	42.6
3	10600.00	56.2 PK	74.0	-17.8	1.81 H	310	45.2	11.0
4	10600.00	47.6 AV	54.0	-6.4	1.81 H	310	36.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.0 PK			1.60 V	80	79.4	42.6
2	*5300.00	110.4 AV			1.60 V	80	67.8	42.6
3	10600.00	58.2 PK	74.0	-15.8	2.60 V	161	47.2	11.0
4	10600.00	48.2 AV	54.0	-5.8	2.60 V	161	37.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.9 PK			2.70 H	263	70.9	43.0
2	*5600.00	104.0 AV			2.70 H	263	61.0	43.0
3	11200.00	57.2 PK	74.0	-16.8	1.77 H	309	45.4	11.8
4	11200.00	48.2 AV	54.0	-5.8	1.77 H	309	36.4	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	122.2 PK			1.68 V	77	79.2	43.0
2	*5600.00	113.5 AV			1.68 V	77	70.5	43.0
3	11200.00	59.0 PK	74.0	-15.0	2.63 V	155	47.2	11.8
4	11200.00	48.1 AV	54.0	-5.9	2.63 V	155	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5651.20	61.1 PK	69.0	-7.9	2.71 H	254	55.4	5.7
2	*5785.00	116.2 PK			2.71 H	254	72.2	44.0
3	*5785.00	105.2 AV			2.71 H	254	61.2	44.0
4	#5938.80	61.7 PK	68.2	-6.5	2.71 H	254	55.8	5.9
5	11570.00	60.6 PK	74.0	-13.4	1.86 H	312	48.0	12.6
6	11570.00	49.1 AV	54.0	-4.9	1.86 H	312	36.5	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5637.60	60.7 PK	68.2	-7.5	1.70 V	92	55.2	5.5
2	*5785.00	124.2 PK			1.70 V	92	80.2	44.0
3	*5785.00	114.7 AV			1.70 V	92	70.7	44.0
4	#5950.80	62.4 PK	68.2	-5.8	1.70 V	92	56.6	5.8
5	11570.00	62.2 PK	74.0	-11.8	2.65 V	171	49.6	12.6
6	11570.00	50.6 AV	54.0	-3.4	2.65 V	171	38.0	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.0 PK	74.0	-14.0	2.77 H	237	55.5	4.5
2	5150.00	44.7 AV	54.0	-9.3	2.77 H	237	40.2	4.5
3	*5210.00	96.7 PK			2.77 H	237	54.2	42.5
4	*5210.00	85.3 AV			2.77 H	237	42.8	42.5
5	#10420.00	56.7 PK	68.2	-11.5	1.89 H	311	45.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	1.61 V	116	63.4	4.5
2	5150.00	51.7 AV	54.0	-2.3	1.61 V	116	47.2	4.5
3	*5210.00	107.9 PK			1.61 V	116	65.4	42.5
4	*5210.00	96.4 AV			1.61 V	116	53.9	42.5
5	#10420.00	58.1 PK	68.2	-10.1	2.55 V	153	46.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	98.2 PK			2.77 H	250	55.6	42.6
2	*5290.00	86.4 AV			2.77 H	250	43.8	42.6
3	5350.00	63.2 PK	74.0	-10.8	2.77 H	250	58.9	4.3
4	5350.00	45.5 AV	54.0	-8.5	2.77 H	250	41.2	4.3
5	#10580.00	57.9 PK	68.2	-10.3	1.87 H	309	46.8	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	109.6 PK			1.68 V	95	67.0	42.6
2	*5290.00	96.8 AV			1.68 V	95	54.2	42.6
3	5350.00	72.3 PK	74.0	-1.7	1.68 V	95	68.0	4.3
4	5350.00	52.5 AV	54.0	-1.5	1.68 V	95	48.2	4.3
5	#10580.00	58.8 PK	68.2	-9.4	2.55 V	160	47.7	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.8 PK	68.2	-11.4	2.69 H	262	52.2	4.6
2	*5690.00	107.4 PK			2.69 H	262	63.6	43.8
3	*5690.00	96.5 AV			2.69 H	262	52.7	43.8
4	#5850.00	60.2 PK	68.2	-8.0	2.69 H	262	54.0	6.2
5	11380.00	57.5 PK	74.0	-16.5	1.70 H	295	45.5	12.0
6	11380.00	48.7 AV	54.0	-5.3	1.70 H	295	36.7	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.9 PK	68.2	-8.3	1.65 V	99	55.3	4.6
2	*5690.00	116.3 PK			1.65 V	99	72.5	43.8
3	*5690.00	103.8 AV			1.65 V	99	60.0	43.8
4	#5850.00	66.7 PK	68.2	-1.5	1.65 V	99	60.5	6.2
5	11380.00	59.5 PK	74.0	-14.5	2.66 V	160	47.5	12.0
6	11380.00	49.6 AV	54.0	-4.4	2.66 V	160	37.6	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	62.3 PK	68.2	-5.9	2.68 H	261	56.6	5.7
2	*5775.00	106.0 PK			2.68 H	261	62.0	44.0
3	*5775.00	94.0 AV			2.68 H	261	50.0	44.0
4	#5931.60	61.0 PK	68.2	-7.2	2.68 H	261	55.1	5.9
5	11550.00	59.9 PK	74.0	-14.1	1.80 H	321	47.5	12.4
6	11550.00	48.6 AV	54.0	-5.4	1.80 H	321	36.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.20	66.7 PK	68.2	-1.5	1.52 V	91	61.0	5.7
2	*5775.00	114.6 PK			1.52 V	91	70.6	44.0
3	*5775.00	102.5 AV			1.52 V	91	58.5	44.0
4	#5927.60	65.7 PK	68.2	-2.5	1.52 V	91	59.8	5.9
5	11550.00	60.0 PK	74.0	-14.0	1.80 V	328	47.6	12.4
6	11550.00	48.8 AV	54.0	-5.2	1.80 V	328	36.4	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.7 PK	74.0	-7.3	2.57 H	260	62.2	4.5
2	5150.00	47.9 AV	54.0	-6.1	2.57 H	260	43.4	4.5
3	*5250.00	100.9 PK			2.57 H	260	58.3	42.6
4	*5250.00	87.6 AV			2.57 H	260	45.0	42.6
5	5350.00	63.9 PK	74.0	-10.1	2.57 H	260	59.6	4.3
6	5350.00	48.6 AV	54.0	-5.4	2.57 H	260	44.3	4.3
7	#10500.00	57.4 PK	68.2	-10.8	1.80 H	333	46.0	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.3 PK	74.0	-3.7	1.52 V	93	65.8	4.5
2	5150.00	51.5 AV	54.0	-2.5	1.52 V	93	47.0	4.5
3	*5250.00	106.9 PK			1.52 V	93	64.3	42.6
4	*5250.00	93.0 AV			1.52 V	93	50.4	42.6
5	5350.00	70.3 PK	74.0	-3.7	1.52 V	93	66.0	4.3
6	5350.00	52.5 AV	54.0	-1.5	1.52 V	93	48.2	4.3
7	#10500.00	59.0 PK	68.2	-9.2	2.70 V	153	47.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.6 PK	74.0	-14.4	2.65 H	277	55.0	4.6
2	5460.00	43.2 AV	54.0	-10.8	2.65 H	277	38.6	4.6
3	#5470.00	63.2 PK	68.2	-5.0	2.65 H	277	58.6	4.6
4	*5570.00	96.6 PK			2.65 H	277	53.9	42.7
5	*5570.00	84.7 AV			2.65 H	277	42.0	42.7
6	#5725.00	58.8 PK	68.2	-9.4	2.65 H	277	53.0	5.8
7	11140.00	57.8 PK	74.0	-16.2	1.93 H	318	46.0	11.8
8	11140.00	45.6 AV	54.0	-8.4	1.93 H	318	33.8	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.6 PK	74.0	-11.4	1.44 V	100	58.0	4.6
2	5460.00	46.6 AV	54.0	-7.4	1.44 V	100	42.0	4.6
3	#5470.00	64.1 PK	68.2	-4.1	1.44 V	100	59.5	4.6
4	*5570.00	106.2 PK			1.44 V	100	63.5	42.7
5	*5570.00	93.7 AV			1.44 V	100	51.0	42.7
6	#5725.00	66.4 PK	68.2	-1.8	1.44 V	100	60.6	5.8
7	11140.00	59.0 PK	74.0	-15.0	2.88 V	166	47.2	11.8
8	11140.00	46.5 AV	54.0	-7.5	2.88 V	166	34.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.2 PK	74.0	-12.8	2.57 H	260	56.7	4.5
2	5150.00	46.5 AV	54.0	-7.5	2.57 H	260	42.0	4.5
3	*5250.00	95.8 PK			2.57 H	260	53.2	42.6
4	*5250.00	83.6 AV			2.57 H	260	41.0	42.6
5	5350.00	62.5 PK	74.0	-11.5	2.57 H	260	58.2	4.3
6	5350.00	45.0 AV	54.0	-9.0	2.57 H	260	40.7	4.3
7	#10500.00	57.0 PK	68.2	-11.2	1.82 H	317	45.6	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	1.35 V	275	61.5	4.5
2	5150.00	49.2 AV	54.0	-4.8	1.35 V	275	44.7	4.5
3	*5250.00	104.6 PK			1.35 V	275	62.0	42.6
4	*5250.00	91.6 AV			1.35 V	275	49.0	42.6
5	5350.00	68.7 PK	74.0	-5.3	1.35 V	275	64.4	4.3
6	5350.00	52.5 AV	54.0	-1.5	1.35 V	275	48.2	4.3
7	#10500.00	58.7 PK	68.2	-9.5	2.65 V	143	47.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.4 PK	74.0	-14.6	2.66 H	259	54.8	4.6
2	5460.00	44.6 AV	54.0	-9.4	2.66 H	259	40.0	4.6
3	#5470.00	60.2 PK	68.2	-8.0	2.66 H	259	55.6	4.6
4	*5570.00	97.2 PK			2.66 H	259	54.5	42.7
5	*5570.00	84.7 AV			2.66 H	259	42.0	42.7
6	#5725.00	59.8 PK	68.2	-8.4	2.66 H	259	54.0	5.8
7	11140.00	57.2 PK	74.0	-16.8	1.89 H	309	45.4	11.8
8	11140.00	45.3 AV	54.0	-8.7	1.89 H	309	33.5	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.1 PK	74.0	-8.9	1.51 V	84	60.5	4.6
2	5460.00	48.6 AV	54.0	-5.4	1.51 V	84	44.0	4.6
3	*5570.00	106.0 PK			1.51 V	84	63.3	42.7
4	*5570.00	93.4 AV			1.51 V	84	50.7	42.7
5	#5725.00	66.6 PK	68.2	-1.6	1.51 V	84	60.8	5.8
6	#5725.00	64.8 PK	68.2	-3.4	1.51 V	84	59.0	5.8
7	11140.00	59.3 PK	74.0	-14.7	2.88 V	160	47.5	11.8
8	11140.00	46.5 AV	54.0	-7.5	2.88 V	160	34.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

2TX (Test Mode C - Dipole Antenna)

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	1.35 H	171	56.3	4.2
2	5150.00	47.4 AV	54.0	-6.6	1.35 H	171	43.2	4.2
3	*5180.00	108.8 PK			1.35 H	171	66.9	41.9
4	*5180.00	99.2 AV			1.35 H	171	57.3	41.9
5	#10360.00	56.8 PK	68.2	-11.4	2.36 H	17	45.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	2.35 V	127	62.8	4.2
2	5150.00	52.3 AV	54.0	-1.7	2.35 V	127	48.1	4.2
3	*5180.00	118.0 PK			2.35 V	127	76.1	41.9
4	*5180.00	108.4 AV			2.35 V	127	66.5	41.9
5	#10360.00	58.3 PK	68.2	-9.9	2.48 V	179	47.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	109.1 PK			1.37 H	169	67.2	41.9
2	*5200.00	99.5 AV			1.37 H	169	57.6	41.9
3	#10400.00	57.2 PK	68.2	-11.0	2.39 H	17	46.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	118.5 PK			2.32 V	123	76.6	41.9
2	*5200.00	108.8 AV			2.32 V	123	66.9	41.9
3	#10400.00	58.7 PK	68.2	-9.5	2.53 V	184	47.7	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	108.6 PK			1.39 H	173	66.9	41.7
2	*5240.00	99.0 AV			1.39 H	173	57.3	41.7
3	5350.00	55.0 PK	74.0	-19.0	1.39 H	173	51.1	3.9
4	5350.00	42.8 AV	54.0	-11.2	1.39 H	173	38.9	3.9
5	#10480.00	57.4 PK	68.2	-10.8	2.32 H	16	46.2	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	117.8 PK			2.39 V	129	76.1	41.7
2	*5240.00	108.1 AV			2.39 V	129	66.4	41.7
3	5350.00	55.3 PK	74.0	-18.7	2.39 V	129	51.4	3.9
4	5350.00	43.4 AV	54.0	-10.6	2.39 V	129	39.5	3.9
5	#10480.00	58.7 PK	68.2	-9.5	2.52 V	176	47.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.6 PK	74.0	-18.4	1.39 H	170	51.4	4.2
2	5150.00	43.3 AV	54.0	-10.7	1.39 H	170	39.1	4.2
3	*5260.00	107.8 PK			1.39 H	170	66.2	41.6
4	*5260.00	98.2 AV			1.39 H	170	56.6	41.6
5	#10520.00	57.5 PK	68.2	-10.7	2.30 H	18	46.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	2.33 V	128	51.9	4.2
2	5150.00	43.8 AV	54.0	-10.2	2.33 V	128	39.6	4.2
3	*5260.00	116.9 PK			2.33 V	128	75.3	41.6
4	*5260.00	107.4 AV			2.33 V	128	65.8	41.6
5	#10520.00	58.9 PK	68.2	-9.3	2.51 V	177	47.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.0 PK			1.43 H	168	66.5	41.5
2	*5300.00	98.5 AV			1.43 H	168	57.0	41.5
3	10600.00	57.7 PK	74.0	-16.3	2.43 H	21	46.3	11.4
4	10600.00	44.3 AV	54.0	-9.7	2.43 H	21	32.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	117.3 PK			2.36 V	131	75.8	41.5
2	*5300.00	107.7 AV			2.36 V	131	66.2	41.5
3	10600.00	59.2 PK	74.0	-14.8	2.53 V	184	47.8	11.4
4	10600.00	45.7 AV	54.0	-8.3	2.53 V	184	34.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.6 PK			1.34 H	176	67.1	41.5
2	*5320.00	99.0 AV			1.34 H	176	57.5	41.5
3	5350.00	59.5 PK	74.0	-14.5	1.34 H	176	55.6	3.9
4	5350.00	45.9 AV	54.0	-8.1	1.34 H	176	42.0	3.9
5	10640.00	57.4 PK	74.0	-16.6	2.28 H	23	46.2	11.2
6	10640.00	44.0 AV	54.0	-10.0	2.28 H	23	32.8	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	117.4 PK			2.19 V	120	75.9	41.5
2	*5320.00	108.1 AV			2.19 V	120	66.6	41.5
3	5350.00	67.6 PK	74.0	-6.4	2.19 V	120	63.7	3.9
4	5350.00	52.2 AV	54.0	-1.8	2.19 V	120	48.3	3.9
5	10640.00	58.7 PK	74.0	-15.3	2.56 V	187	47.5	11.2
6	10640.00	45.5 AV	54.0	-8.5	2.56 V	187	34.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.4 PK	74.0	-16.6	1.85 H	126	53.3	4.1
2	5460.00	43.9 AV	54.0	-10.1	1.85 H	126	39.8	4.1
3	#5470.00	58.8 PK	68.2	-9.4	1.85 H	126	54.7	4.1
4	*5500.00	109.3 PK			1.85 H	126	67.4	41.9
5	*5500.00	99.5 AV			1.85 H	126	57.6	41.9
6	11000.00	58.7 PK	74.0	-15.3	3.93 H	241	47.4	11.3
7	11000.00	45.5 AV	54.0	-8.5	3.93 H	241	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	62.1 PK	74.0	-11.9	1.65 V	84	57.9	4.2
2	5460.00	47.0 AV	54.0	-7.0	1.65 V	84	42.8	4.2
3	#5470.00	66.5 PK	68.2	-1.7	1.65 V	84	62.3	4.2
4	*5500.00	118.4 PK			1.65 V	84	76.5	41.9
5	*5500.00	108.9 AV			1.65 V	84	67.0	41.9
6	11000.00	59.4 PK	74.0	-14.6	2.74 V	265	49.1	10.3
7	11000.00	46.7 AV	54.0	-7.3	2.74 V	265	36.4	10.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	110.6 PK			1.86 H	124	68.3	42.3
2	*5600.00	101.0 AV			1.86 H	124	58.7	42.3
3	11200.00	59.8 PK	74.0	-14.2	3.91 H	238	47.9	11.9
4	11200.00	46.5 AV	54.0	-7.5	3.91 H	238	34.6	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	120.0 PK			1.53 V	88	77.7	42.3
2	*5600.00	110.4 AV			1.53 V	88	68.1	42.3
3	11200.00	61.8 PK	74.0	-12.2	2.79 V	263	49.9	11.9
4	11200.00	48.7 AV	54.0	-5.3	2.79 V	263	36.8	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.3 PK			1.89 H	126	66.3	43.0
2	*5700.00	99.7 AV			1.89 H	126	56.7	43.0
3	#5725.00	60.3 PK	68.2	-7.9	1.89 H	126	54.7	5.6
4	11400.00	59.9 PK	74.0	-14.1	3.93 H	237	47.4	12.5
5	11400.00	46.6 AV	54.0	-7.4	3.93 H	237	34.1	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.4 PK			1.63 V	83	75.4	43.0
2	*5700.00	108.7 AV			1.63 V	83	65.7	43.0
3	#5725.00	66.5 PK	68.2	-1.7	1.63 V	83	60.9	5.6
4	11400.00	61.4 PK	74.0	-12.6	2.71 V	262	48.9	12.5
5	11400.00	48.7 AV	54.0	-5.3	2.71 V	262	36.2	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.4 PK	68.2	-11.8	1.81 H	122	52.3	4.1
2	*5720.00	110.1 PK			1.81 H	122	66.9	43.2
3	*5720.00	100.5 AV			1.81 H	122	57.3	43.2
4	#5850.00	57.2 PK	68.2	-11.0	1.81 H	122	51.4	5.8
5	11440.00	60.3 PK	74.0	-13.7	3.87 H	236	47.9	12.4
6	11440.00	46.8 AV	54.0	-7.2	3.87 H	236	34.4	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.2 PK	68.2	-11.0	1.63 V	85	53.1	4.1
2	*5720.00	119.6 PK			1.63 V	85	76.4	43.2
3	*5720.00	109.9 AV			1.63 V	85	66.7	43.2
4	#5850.00	57.5 PK	68.2	-10.7	1.63 V	85	51.7	5.8
5	11440.00	62.2 PK	74.0	-11.8	2.70 V	360	49.8	12.4
6	11440.00	49.1 AV	54.0	-4.9	2.70 V	360	36.7	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5630.00	60.6 PK	68.2	-7.6	1.96 H	134	55.6	5.0
2	*5745.00	112.8 PK			1.96 H	134	69.5	43.3
3	*5745.00	103.2 AV			1.96 H	134	59.9	43.3
4	#5936.80	62.2 PK	68.2	-6.0	1.96 H	134	56.4	5.8
5	11490.00	61.9 PK	74.0	-12.1	3.87 H	256	49.7	12.2
6	11490.00	49.2 AV	54.0	-4.8	3.87 H	256	37.0	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.80	62.6 PK	68.2	-5.6	1.59 V	68	57.6	5.0
2	*5745.00	122.0 PK			1.59 V	68	78.7	43.3
3	*5745.00	112.5 AV			1.59 V	68	69.2	43.3
4	#5929.20	62.0 PK	68.2	-6.2	1.59 V	68	56.1	5.9
5	11490.00	63.1 PK	74.0	-10.9	2.82 V	296	50.9	12.2
6	11490.00	50.5 AV	54.0	-3.5	2.82 V	296	38.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5621.60	60.7 PK	68.2	-7.5	1.99 H	135	55.7	5.0
2	*5785.00	114.2 PK			1.99 H	135	70.8	43.4
3	*5785.00	104.6 AV			1.99 H	135	61.2	43.4
4	#5969.20	62.0 PK	68.2	-6.2	1.99 H	135	56.2	5.8
5	11570.00	61.6 PK	74.0	-12.4	3.97 H	246	49.8	11.8
6	11570.00	49.0 AV	54.0	-5.0	3.97 H	246	37.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.80	60.6 PK	68.2	-7.6	1.62 V	78	55.6	5.0
2	*5785.00	123.6 PK			1.62 V	78	80.2	43.4
3	*5785.00	114.0 AV			1.62 V	78	70.6	43.4
4	#5927.20	62.4 PK	68.2	-5.8	1.62 V	78	56.5	5.9
5	11570.00	62.9 PK	74.0	-11.1	2.83 V	297	51.1	11.8
6	11570.00	50.1 AV	54.0	-3.9	2.83 V	297	38.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.60	61.1 PK	68.2	-7.1	1.91 H	137	56.0	5.1
2	*5825.00	114.2 PK			1.91 H	137	70.8	43.4
3	*5825.00	104.7 AV			1.91 H	137	61.3	43.4
4	#5931.20	62.0 PK	68.2	-6.2	1.91 H	137	56.1	5.9
5	11650.00	61.3 PK	74.0	-12.7	3.96 H	257	49.6	11.7
6	11650.00	48.6 AV	54.0	-5.4	3.96 H	257	36.9	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.60	60.7 PK	68.2	-7.5	1.61 V	78	55.6	5.1
2	*5825.00	123.3 PK			1.61 V	78	79.9	43.4
3	*5825.00	113.8 AV			1.61 V	78	70.4	43.4
4	#5952.80	62.3 PK	68.2	-5.9	1.61 V	78	56.5	5.8
5	11650.00	62.4 PK	74.0	-11.6	2.85 V	293	50.7	11.7
6	11650.00	50.0 AV	54.0	-4.0	2.85 V	293	38.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.0 PK	74.0	-13.0	1.38 H	171	56.8	4.2
2	5150.00	46.8 AV	54.0	-7.2	1.38 H	171	42.6	4.2
3	*5180.00	109.8 PK			1.38 H	171	67.9	41.9
4	*5180.00	98.5 AV			1.38 H	171	56.6	41.9
5	#10360.00	56.6 PK	68.2	-11.6	2.32 H	13	45.6	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.4 PK	74.0	-6.6	2.34 V	127	63.2	4.2
2	5150.00	52.4 AV	54.0	-1.6	2.34 V	127	48.2	4.2
3	*5180.00	119.0 PK			2.34 V	127	77.1	41.9
4	*5180.00	107.6 AV			2.34 V	127	65.7	41.9
5	#10360.00	58.2 PK	68.2	-10.0	2.53 V	187	47.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.4 PK			1.38 H	170	68.5	41.9
2	*5200.00	98.9 AV			1.38 H	170	57.0	41.9
3	#10400.00	57.2 PK	68.2	-11.0	2.39 H	11	46.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	119.5 PK			2.31 V	129	77.6	41.9
2	*5200.00	108.1 AV			2.31 V	129	66.2	41.9
3	#10400.00	58.4 PK	68.2	-9.8	2.56 V	173	47.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.0 PK			1.31 H	167	68.3	41.7
2	*5240.00	98.5 AV			1.31 H	167	56.8	41.7
3	5350.00	55.0 PK	74.0	-19.0	1.31 H	167	51.1	3.9
4	5350.00	42.7 AV	54.0	-11.3	1.31 H	167	38.8	3.9
5	#10480.00	57.1 PK	68.2	-11.1	2.33 H	18	45.9	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.1 PK			2.39 V	128	77.4	41.7
2	*5240.00	107.8 AV			2.39 V	128	66.1	41.7
3	5350.00	55.5 PK	74.0	-18.5	2.39 V	128	51.6	3.9
4	5350.00	43.3 AV	54.0	-10.7	2.39 V	128	39.4	3.9
5	#10480.00	58.8 PK	68.2	-9.4	2.47 V	173	47.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.4 PK	74.0	-18.6	1.44 H	167	51.2	4.2
2	5150.00	43.5 AV	54.0	-10.5	1.44 H	167	39.3	4.2
3	*5260.00	109.1 PK			1.44 H	167	67.5	41.6
4	*5260.00	97.7 AV			1.44 H	167	56.1	41.6
5	#10520.00	57.5 PK	68.2	-10.7	2.39 H	24	46.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	1.96 V	142	51.8	4.2
2	5150.00	44.0 AV	54.0	-10.0	1.96 V	142	39.8	4.2
3	*5260.00	118.2 PK			1.96 V	142	76.6	41.6
4	*5260.00	106.8 AV			1.96 V	142	65.2	41.6
5	#10520.00	58.9 PK	68.2	-9.3	2.56 V	189	47.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	109.3 PK			1.41 H	165	67.8	41.5
2	*5300.00	97.9 AV			1.41 H	165	56.4	41.5
3	10600.00	57.7 PK	74.0	-16.3	2.29 H	28	46.3	11.4
4	10600.00	44.5 AV	54.0	-9.5	2.29 H	28	33.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	118.6 PK			2.13 V	126	77.1	41.5
2	*5300.00	107.1 AV			2.13 V	126	65.6	41.5
3	10600.00	59.2 PK	74.0	-14.8	2.59 V	174	47.8	11.4
4	10600.00	46.0 AV	54.0	-8.0	2.59 V	174	34.6	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.3 PK			1.42 H	165	67.8	41.5
2	*5320.00	97.9 AV			1.42 H	165	56.4	41.5
3	5350.00	58.2 PK	74.0	-15.8	1.42 H	165	54.3	3.9
4	5350.00	45.7 AV	54.0	-8.3	1.42 H	165	41.8	3.9
5	10640.00	57.3 PK	74.0	-16.7	2.29 H	25	46.1	11.2
6	10640.00	44.2 AV	54.0	-9.8	2.29 H	25	33.0	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	118.4 PK			2.02 V	144	76.9	41.5
2	*5320.00	107.1 AV			2.02 V	144	65.6	41.5
3	5350.00	67.0 PK	74.0	-7.0	2.02 V	144	63.1	3.9
4	5350.00	52.3 AV	54.0	-1.7	2.02 V	144	48.4	3.9
5	10640.00	58.7 PK	74.0	-15.3	2.52 V	187	47.5	11.2
6	10640.00	45.5 AV	54.0	-8.5	2.52 V	187	34.3	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.2 PK	74.0	-16.8	1.85 H	121	53.1	4.1
2	5460.00	44.0 AV	54.0	-10.0	1.85 H	121	39.9	4.1
3	#5470.00	60.4 PK	68.2	-7.8	1.85 H	121	56.3	4.1
4	*5500.00	110.2 PK			1.85 H	121	68.3	41.9
5	*5500.00	98.5 AV			1.85 H	121	56.6	41.9
6	11000.00	58.6 PK	74.0	-15.4	3.87 H	237	47.3	11.3
7	11000.00	45.3 AV	54.0	-8.7	3.87 H	237	34.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	63.0 PK	74.0	-11.0	1.64 V	84	58.9	4.1
2	5460.00	46.5 AV	54.0	-7.5	1.64 V	84	42.4	4.1
3	#5470.00	66.5 PK	68.2	-1.7	1.64 V	84	62.4	4.1
4	*5500.00	118.1 PK			1.64 V	84	76.2	41.9
5	*5500.00	107.6 AV			1.64 V	84	65.7	41.9
6	11000.00	60.3 PK	74.0	-13.7	2.78 V	261	49.0	11.3
7	11000.00	47.5 AV	54.0	-6.5	2.78 V	261	36.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	111.5 PK			1.92 H	131	69.2	42.3
2	*5600.00	100.1 AV			1.92 H	131	57.8	42.3
3	11200.00	59.3 PK	74.0	-14.7	3.92 H	235	47.4	11.9
4	11200.00	46.0 AV	54.0	-8.0	3.92 H	235	34.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	121.0 PK			1.58 V	86	78.7	42.3
2	*5600.00	109.7 AV			1.58 V	86	67.4	42.3
3	11200.00	61.6 PK	74.0	-12.4	2.78 V	260	49.7	11.9
4	11200.00	48.6 AV	54.0	-5.4	2.78 V	260	36.7	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.1 PK			1.87 H	116	66.1	43.0
2	*5700.00	97.4 AV			1.87 H	116	54.4	43.0
3	#5725.00	59.1 PK	68.2	-9.1	1.87 H	116	53.5	5.6
4	11400.00	59.7 PK	74.0	-14.3	3.86 H	234	47.2	12.5
5	11400.00	46.4 AV	54.0	-7.6	3.86 H	234	33.9	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.6 PK			1.61 V	85	75.6	43.0
2	*5700.00	106.8 AV			1.61 V	85	63.8	43.0
3	#5725.00	66.4 PK	68.2	-1.8	1.61 V	85	60.8	5.6
4	11400.00	61.1 PK	74.0	-12.9	2.83 V	257	48.6	12.5
5	11400.00	48.6 AV	54.0	-5.4	2.83 V	257	36.1	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.9 PK	68.2	-12.3	1.90 H	124	51.8	4.1
2	*5720.00	112.4 PK			1.90 H	124	69.2	43.2
3	*5720.00	100.9 AV			1.90 H	124	57.7	43.2
4	#5850.00	57.4 PK	68.2	-10.8	1.90 H	124	51.6	5.8
5	11440.00	59.5 PK	74.0	-14.5	3.87 H	236	47.1	12.4
6	11440.00	46.2 AV	54.0	-7.8	3.87 H	236	33.8	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.0 PK	68.2	-11.2	1.59 V	87	52.9	4.1
2	*5720.00	121.8 PK			1.59 V	87	78.6	43.2
3	*5720.00	110.4 AV			1.59 V	87	67.2	43.2
4	#5850.00	58.6 PK	68.2	-9.6	1.59 V	87	52.8	5.8
5	11440.00	61.2 PK	74.0	-12.8	2.67 V	256	48.8	12.4
6	11440.00	48.6 AV	54.0	-5.4	2.67 V	256	36.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.40	61.2 PK	68.2	-7.0	1.97 H	132	56.1	5.1
2	*5745.00	114.9 PK			1.97 H	132	71.6	43.3
3	*5745.00	103.6 AV			1.97 H	132	60.3	43.3
4	#5930.80	61.6 PK	68.2	-6.6	1.97 H	132	55.7	5.9
5	11490.00	61.5 PK	74.0	-12.5	3.91 H	259	49.3	12.2
6	11490.00	49.0 AV	54.0	-5.0	3.91 H	259	36.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5612.80	61.2 PK	68.2	-7.0	1.64 V	80	56.3	4.9
2	*5745.00	124.0 PK			1.64 V	80	80.7	43.3
3	*5745.00	112.6 AV			1.64 V	80	69.3	43.3
4	#5999.60	62.3 PK	68.2	-5.9	1.64 V	80	56.5	5.8
5	11490.00	62.8 PK	74.0	-11.2	2.85 V	291	50.6	12.2
6	11490.00	50.2 AV	54.0	-3.8	2.85 V	291	38.0	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5635.20	60.8 PK	68.2	-7.4	1.91 H	132	55.7	5.1
2	*5785.00	115.6 PK			1.91 H	130	72.2	43.4
3	*5785.00	104.1 AV			1.91 H	130	60.7	43.4
4	#5960.00	61.8 PK	68.2	-6.4	1.91 H	132	56.0	5.8
5	11570.00	61.4 PK	74.0	-12.6	3.94 H	252	49.6	11.8
6	11570.00	48.6 AV	54.0	-5.4	3.94 H	252	36.8	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5614.80	61.1 PK	68.2	-7.1	1.65 V	77	56.2	4.9
2	*5785.00	124.6 PK			1.65 V	77	81.2	43.4
3	*5785.00	113.4 AV			1.65 V	77	70.0	43.4
4	#5932.00	62.5 PK	68.2	-5.7	1.65 V	77	56.6	5.9
5	11570.00	62.3 PK	74.0	-11.7	2.82 V	299	50.5	11.8
6	11570.00	49.9 AV	54.0	-4.1	2.82 V	299	38.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.80	60.9 PK	68.2	-7.3	1.89 H	133	55.8	5.1
2	*5825.00	115.0 PK			1.89 H	133	71.6	43.4
3	*5825.00	103.7 AV			1.89 H	133	60.3	43.4
4	#5954.80	62.5 PK	68.2	-5.7	1.89 H	133	56.7	5.8
5	11650.00	60.9 PK	74.0	-13.1	3.98 H	252	49.2	11.7
6	11650.00	48.5 AV	54.0	-5.5	3.98 H	252	36.8	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.40	61.0 PK	68.2	-7.2	1.62 V	80	56.0	5.0
2	*5825.00	124.2 PK			1.62 V	80	80.8	43.4
3	*5825.00	113.0 AV			1.62 V	80	69.6	43.4
4	#5998.00	62.4 PK	68.2	-5.8	1.62 V	80	56.6	5.8
5	11650.00	62.0 PK	74.0	-12.0	2.83 V	294	50.3	11.7
6	11650.00	49.7 AV	54.0	-4.3	2.83 V	294	38.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.1 PK	74.0	-12.9	1.40 H	176	56.9	4.2
2	5150.00	48.3 AV	54.0	-5.7	1.40 H	176	44.1	4.2
3	*5190.00	103.9 PK			1.40 H	176	62.1	41.8
4	*5190.00	92.5 AV			1.40 H	176	50.7	41.8
5	#10380.00	56.5 PK	68.2	-11.7	2.43 H	18	45.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.3 PK	74.0	-7.7	2.34 V	128	62.1	4.2
2	5150.00	52.3 AV	54.0	-1.7	2.34 V	128	48.1	4.2
3	*5190.00	113.1 PK			2.34 V	128	71.3	41.8
4	*5190.00	101.7 AV			2.34 V	128	59.9	41.8
5	#10380.00	57.8 PK	68.2	-10.4	2.53 V	132	46.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	107.6 PK			1.34 H	172	65.8	41.8
2	*5230.00	96.1 AV			1.34 H	172	54.3	41.8
3	5350.00	55.2 PK	74.0	-18.8	1.34 H	172	51.3	3.9
4	5350.00	43.3 AV	54.0	-10.7	1.34 H	172	39.4	3.9
5	#10460.00	56.7 PK	68.2	-11.5	2.32 H	19	45.5	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	116.6 PK			2.33 V	128	74.8	41.8
2	*5230.00	105.2 AV			2.33 V	128	63.4	41.8
3	5350.00	55.7 PK	74.0	-18.3	2.33 V	128	51.8	3.9
4	5350.00	44.0 AV	54.0	-10.0	2.33 V	128	40.1	3.9
5	#10460.00	58.3 PK	68.2	-9.9	2.57 V	182	47.1	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 54 : 5270 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.4 PK	74.0	-18.6	1.39 H	166	51.2	4.2
2	5150.00	43.3 AV	54.0	-10.7	1.39 H	166	39.1	4.2
3	*5270.00	107.3 PK			1.39 H	166	65.7	41.6
4	*5270.00	95.9 AV			1.39 H	166	54.3	41.6
5	#10540.00	57.5 PK	68.2	-10.7	2.33 H	27	46.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	55.9 PK	74.0	-18.1	1.96 V	144	51.7	4.2
2	5150.00	44.0 AV	54.0	-10.0	1.96 V	144	39.8	4.2
3	*5270.00	116.2 PK			1.96 V	144	74.6	41.6
4	*5270.00	104.8 AV			1.96 V	144	63.2	41.6
5	#10540.00	58.3 PK	68.2	-9.9	2.44 V	175	47.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 62 : 5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	104.0 PK			1.33 H	174	62.5	41.5
2	*5310.00	92.6 AV			1.33 H	174	51.1	41.5
3	5350.00	61.0 PK	74.0	-13.0	1.33 H	174	57.1	3.9
4	5350.00	46.0 AV	54.0	-8.0	1.33 H	174	42.1	3.9
5	10620.00	57.4 PK	74.0	-16.6	2.46 H	29	46.1	11.3
6	10620.00	44.2 AV	54.0	-9.8	2.46 H	29	32.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	113.2 PK			1.97 V	95	71.7	41.5
2	*5310.00	101.7 AV			1.97 V	95	60.2	41.5
3	5350.00	67.6 PK	74.0	-6.4	1.97 V	95	63.7	3.9
4	5350.00	52.4 AV	54.0	-1.6	1.97 V	95	48.5	3.9
5	10620.00	58.7 PK	74.0	-15.3	2.49 V	175	47.4	11.3
6	10620.00	45.5 AV	54.0	-8.5	2.49 V	175	34.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 102 : 5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.1 PK	74.0	-14.9	1.81 H	132	55.0	4.1
2	5460.00	46.1 AV	54.0	-7.9	1.81 H	132	42.0	4.1
3	#5470.00	62.6 PK	68.2	-5.6	1.81 H	132	58.5	4.1
4	*5510.00	105.1 PK			1.81 H	132	63.1	42.0
5	*5510.00	93.4 AV			1.81 H	132	51.4	42.0
6	11020.00	58.2 PK	74.0	-15.8	3.89 H	234	46.8	11.4
7	11020.00	44.9 AV	54.0	-9.1	3.89 H	234	33.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	1.64 V	86	57.8	4.1
2	5460.00	48.2 AV	54.0	-5.8	1.64 V	86	44.1	4.1
3	#5470.00	66.4 PK	68.2	-1.8	1.64 V	86	62.3	4.1
4	*5510.00	114.5 PK			1.64 V	86	72.5	42.0
5	*5510.00	102.8 AV			1.64 V	86	60.8	42.0
6	11020.00	60.0 PK	74.0	-14.0	2.84 V	254	48.6	11.4
7	11020.00	46.9 AV	54.0	-7.1	2.84 V	254	35.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 126 : 5630 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	111.2 PK			1.89 H	114	68.6	42.6
2	*5630.00	99.0 AV			1.89 H	114	56.4	42.6
3	11260.00	59.3 PK	74.0	-14.7	3.85 H	234	47.2	12.1
4	11260.00	46.2 AV	54.0	-7.8	3.85 H	234	34.1	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5630.00	120.9 PK			1.66 V	87	78.3	42.6
2	*5630.00	108.4 AV			1.66 V	87	65.8	42.6
3	11260.00	60.8 PK	74.0	-13.2	2.87 V	261	48.7	12.1
4	11260.00	48.2 AV	54.0	-5.8	2.87 V	261	36.1	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 134 : 5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	108.1 PK			1.83 H	133	65.2	42.9
2	*5670.00	96.2 AV			1.83 H	133	53.3	42.9
3	#5725.00	59.4 PK	68.2	-8.8	1.83 H	133	53.8	5.6
4	11340.00	58.9 PK	74.0	-15.1	3.88 H	239	46.6	12.3
5	11340.00	45.8 AV	54.0	-8.2	3.88 H	239	33.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	116.8 PK			1.62 V	85	73.9	42.9
2	*5670.00	105.4 AV			1.62 V	85	62.5	42.9
3	#5725.00	66.4 PK	68.2	-1.8	1.62 V	85	60.8	5.6
4	11340.00	60.7 PK	74.0	-13.3	2.69 V	255	48.4	12.3
5	11340.00	48.0 AV	54.0	-6.0	2.69 V	255	35.7	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 142 : 5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.9 PK	68.2	-10.3	1.79 H	120	53.8	4.1
2	*5710.00	110.0 PK			1.79 H	120	66.9	43.1
3	*5710.00	98.7 AV			1.79 H	120	55.6	43.1
4	#5850.00	57.5 PK	68.2	-10.7	1.79 H	120	51.7	5.8
5	11420.00	59.1 PK	74.0	-14.9	3.91 H	238	46.6	12.5
6	11420.00	46.1 AV	54.0	-7.9	3.91 H	238	33.6	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.0 PK	68.2	-9.2	1.63 V	88	54.9	4.1
2	*5710.00	119.1 PK			1.63 V	88	76.0	43.1
3	*5710.00	108.0 AV			1.63 V	88	64.9	43.1
4	#5850.00	58.7 PK	68.2	-9.5	1.63 V	88	52.9	5.8
5	11420.00	61.3 PK	74.0	-12.7	2.83 V	257	48.8	12.5
6	11420.00	48.7 AV	54.0	-5.3	2.83 V	257	36.2	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.40	61.2 PK	68.2	-7.0	1.99 H	134	56.1	5.1
2	*5755.00	112.5 PK			1.99 H	134	69.2	43.3
3	*5755.00	100.7 AV			1.99 H	134	57.4	43.3
4	#5929.20	61.9 PK	68.2	-6.3	1.99 H	134	56.0	5.9
5	11510.00	60.9 PK	74.0	-13.1	3.91 H	247	48.8	12.1
6	11510.00	48.7 AV	54.0	-5.3	3.91 H	247	36.6	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.20	66.4 PK	68.2	-1.8	1.65 V	78	61.2	5.2
2	*5755.00	121.6 PK			1.65 V	78	78.3	43.3
3	*5755.00	109.9 AV			1.65 V	78	66.6	43.3
4	#5931.20	62.6 PK	68.2	-5.6	1.65 V	78	56.7	5.9
5	11510.00	62.2 PK	74.0	-11.8	2.84 V	294	50.1	12.1
6	11510.00	49.9 AV	54.0	-4.1	2.84 V	294	37.8	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5609.60	60.9 PK	68.2	-7.3	1.95 H	139	56.1	4.8
2	*5795.00	112.8 PK			1.95 H	139	69.4	43.4
3	*5795.00	101.2 AV			1.95 H	139	57.8	43.4
4	#5927.20	62.7 PK	68.2	-5.5	1.95 H	139	56.8	5.9
5	11590.00	60.4 PK	74.0	-13.6	3.90 H	251	48.7	11.7
6	11590.00	48.4 AV	54.0	-5.6	3.90 H	251	36.7	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.00	62.2 PK	68.2	-6.0	1.59 V	74	57.2	5.0
2	*5795.00	122.0 PK			1.59 V	74	78.6	43.4
3	*5795.00	110.5 AV			1.59 V	74	67.1	43.4
4	#5927.20	66.5 PK	68.2	-1.7	1.59 V	74	60.6	5.9
5	11590.00	62.0 PK	74.0	-12.0	2.83 V	297	50.3	11.7
6	11590.00	49.6 AV	54.0	-4.4	2.83 V	297	37.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.34 H	174	54.6	4.2
2	5150.00	47.0 AV	54.0	-7.0	1.34 H	174	42.8	4.2
3	*5210.00	100.1 PK			1.34 H	174	58.2	41.9
4	*5210.00	88.7 AV			1.34 H	174	46.8	41.9
5	#10420.00	56.4 PK	68.2	-11.8	2.31 H	17	45.4	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	67.5 PK	74.0	-6.5	2.40 V	128	63.3	4.2
2	5150.00	52.4 AV	54.0	-1.6	2.40 V	128	48.2	4.2
3	*5210.00	109.3 PK			2.40 V	128	67.4	41.9
4	*5210.00	97.8 AV			2.40 V	128	55.9	41.9
5	#10420.00	57.7 PK	68.2	-10.5	2.56 V	172	46.7	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	101.1 PK			1.30 H	172	59.6	41.5
2	*5290.00	89.6 AV			1.30 H	172	48.1	41.5
3	5350.00	59.7 PK	74.0	-14.3	1.30 H	172	55.8	3.9
4	5350.00	47.0 AV	54.0	-7.0	1.30 H	172	43.1	3.9
5	#10580.00	57.2 PK	68.2	-11.0	2.38 H	13	45.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	110.3 PK			1.64 V	94	68.8	41.5
2	*5290.00	98.8 AV			1.64 V	94	57.3	41.5
3	5350.00	66.7 PK	74.0	-7.3	1.64 V	94	62.8	3.9
4	5350.00	52.3 AV	54.0	-1.7	1.64 V	94	48.4	3.9
5	#10580.00	58.6 PK	68.2	-9.6	2.45 V	174	47.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 106 : 5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.4 PK	74.0	-13.6	1.90 H	125	56.3	4.1
2	5460.00	46.7 AV	54.0	-7.3	1.90 H	125	42.6	4.1
3	#5470.00	61.5 PK	68.2	-6.7	1.90 H	125	57.4	4.1
4	*5530.00	102.2 PK			1.90 H	125	60.2	42.0
5	*5530.00	90.3 AV			1.90 H	125	48.3	42.0
6	11060.00	57.9 PK	74.0	-16.1	3.88 H	235	46.4	11.5
7	11060.00	44.9 AV	54.0	-9.1	3.88 H	235	33.4	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.6 PK	74.0	-8.4	1.56 V	86	61.5	4.1
2	5460.00	52.3 AV	54.0	-1.7	1.56 V	86	48.2	4.1
3	#5470.00	66.7 PK	68.2	-1.5	1.56 V	86	62.6	4.1
4	*5530.00	111.4 PK			1.56 V	86	69.4	42.0
5	*5530.00	99.6 AV			1.56 V	86	57.6	42.0
6	11060.00	59.9 PK	74.0	-14.1	2.87 V	253	48.4	11.5
7	11060.00	46.8 AV	54.0	-7.2	2.87 V	253	35.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 122 : 5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	1.79 H	129	53.5	4.1
2	5460.00	44.9 AV	54.0	-9.1	1.79 H	129	40.8	4.1
3	#5470.00	58.8 PK	68.2	-9.4	1.79 H	129	54.7	4.1
4	*5610.00	106.3 PK			1.79 H	129	63.9	42.4
5	*5610.00	94.7 AV			1.79 H	129	52.3	42.4
6	#5725.00	60.3 PK	68.2	-7.9	1.79 H	129	54.7	5.6
7	11220.00	58.3 PK	74.0	-15.7	3.91 H	244	46.3	12.0
8	11220.00	45.2 AV	54.0	-8.8	3.91 H	244	33.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.6 PK	74.0	-12.4	1.56 V	85	57.5	4.1
2	5460.00	48.4 AV	54.0	-5.6	1.56 V	85	44.3	4.1
3	#5470.00	64.9 PK	68.2	-3.3	1.56 V	85	60.8	4.1
4	*5610.00	115.5 PK			1.56 V	85	73.1	42.4
5	*5610.00	103.8 AV			1.56 V	85	61.4	42.4
6	#5725.00	66.7 PK	68.2	-1.5	1.56 V	85	61.1	5.6
7	11220.00	60.5 PK	74.0	-13.5	2.91 V	258	48.5	12.0
8	11220.00	47.5 AV	54.0	-6.5	2.91 V	258	35.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.8 PK	68.2	-11.4	1.91 H	119	52.7	4.1
2	*5690.00	107.7 PK			1.91 H	119	64.7	43.0
3	*5690.00	95.7 AV			1.91 H	119	52.7	43.0
4	#5850.00	61.6 PK	68.2	-6.6	1.91 H	119	55.8	5.8
5	11380.00	58.9 PK	74.0	-15.1	3.82 H	234	46.4	12.5
6	11380.00	45.7 AV	54.0	-8.3	3.82 H	234	33.2	12.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.9 PK	68.2	-9.3	1.67 V	86	54.8	4.1
2	*5690.00	117.1 PK			1.67 V	86	74.1	43.0
3	*5690.00	104.9 AV			1.67 V	86	61.9	43.0
4	#5850.00	63.2 PK	68.2	-5.0	1.67 V	86	57.4	5.8
5	11380.00	60.8 PK	74.0	-13.2	2.82 V	263	48.3	12.5
6	11380.00	48.2 AV	54.0	-5.8	2.82 V	263	35.7	12.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.60	61.3 PK	68.2	-6.9	1.99 H	140	56.2	5.1
2	*5775.00	107.3 PK			1.99 H	140	63.9	43.4
3	*5775.00	95.0 AV			1.99 H	140	51.6	43.4
4	#5960.00	61.6 PK	68.2	-6.6	1.99 H	140	55.8	5.8
5	11550.00	60.2 PK	74.0	-13.8	3.87 H	244	48.3	11.9
6	11550.00	48.1 AV	54.0	-5.9	3.87 H	244	36.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.20	66.5 PK	68.2	-1.7	1.63 V	81	61.3	5.2
2	*5775.00	117.0 PK			1.63 V	81	73.6	43.4
3	*5775.00	104.3 AV			1.63 V	81	60.9	43.4
4	#5930.00	64.5 PK	68.2	-3.7	1.63 V	81	58.6	5.9
5	11550.00	61.6 PK	74.0	-12.4	2.87 V	294	49.7	11.9
6	11550.00	49.5 AV	54.0	-4.5	2.87 V	294	37.6	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.81 H	123	55.4	4.2
2	5150.00	45.5 AV	54.0	-8.5	1.81 H	123	41.3	4.2
3	*5250.00	97.1 PK			1.81 H	123	55.4	41.7
4	*5250.00	85.4 AV			1.81 H	123	43.7	41.7
5	5350.00	60.3 PK	74.0	-13.7	1.81 H	123	56.4	3.9
6	5350.00	47.6 AV	54.0	-6.4	1.81 H	123	43.7	3.9
7	#10500.00	56.6 PK	68.2	-11.6	2.43 H	19	45.4	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	1.66 V	85	58.6	4.2
2	5150.00	50.1 AV	54.0	-3.9	1.66 V	85	45.9	4.2
3	*5250.00	105.9 PK			1.66 V	85	64.2	41.7
4	*5250.00	94.4 AV			1.66 V	85	52.7	41.7
5	5350.00	65.0 PK	74.0	-9.0	1.66 V	85	61.1	3.9
6	5350.00	52.4 AV	54.0	-1.6	1.66 V	85	48.5	3.9
7	#10500.00	58.1 PK	68.2	-10.1	2.37 V	175	46.9	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.0 PK	74.0	-13.0	1.85 H	130	56.9	4.1
2	5460.00	47.9 AV	54.0	-6.1	1.85 H	130	43.8	4.1
3	#5470.00	62.8 PK	68.2	-5.4	1.85 H	130	58.7	4.1
4	*5570.00	99.7 PK			1.85 H	130	57.5	42.2
5	*5570.00	87.9 AV			1.85 H	130	45.7	42.2
6	#5725.00	59.8 PK	68.2	-8.4	1.85 H	130	54.2	5.6
7	11140.00	58.2 PK	74.0	-15.8	3.87 H	236	46.3	11.9
8	11140.00	45.3 AV	54.0	-8.7	3.87 H	236	33.4	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	65.9 PK	74.0	-8.1	1.59 V	89	61.8	4.1
2	5460.00	52.3 AV	54.0	-1.7	1.59 V	89	48.2	4.1
3	#5470.00	66.6 PK	68.2	-1.6	1.59 V	89	62.5	4.1
4	*5570.00	109.0 PK			1.59 V	89	66.8	42.2
5	*5570.00	96.9 AV			1.59 V	89	54.7	42.2
6	#5725.00	65.8 PK	68.2	-2.4	1.59 V	89	60.2	5.6
7	11140.00	60.3 PK	74.0	-13.7	2.91 V	252	48.4	11.9
8	11140.00	47.3 AV	54.0	-6.7	2.91 V	252	35.4	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.00	60.0 PK	74.0	-14.0	2.58 H	256	55.5	4.5
2	5140.00	43.5 AV	54.0	-10.5	2.58 H	256	39.0	4.5
3	*5180.00	115.6 PK			2.58 H	256	73.2	42.4
4	*5180.00	105.5 AV			2.58 H	256	63.1	42.4
5	#10360.00	59.0 PK	68.2	-9.2	2.34 H	24	47.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.00	65.8 PK	74.0	-8.2	1.49 V	136	61.3	4.5
2	5140.00	45.2 AV	54.0	-8.8	1.49 V	136	40.7	4.5
3	*5180.00	124.9 PK			1.49 V	136	82.5	42.4
4	*5180.00	113.6 AV			1.49 V	136	71.2	42.4
5	#10360.00	60.1 PK	68.2	-8.1	2.41 V	188	48.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.8 PK			2.55 H	262	72.3	42.5
2	*5200.00	104.6 AV			2.55 H	262	62.1	42.5
3	#10400.00	58.7 PK	68.2	-9.5	2.41 H	15	47.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	124.8 PK			1.62 V	87	82.3	42.5
2	*5200.00	115.1 AV			1.62 V	87	72.6	42.5
3	#10400.00	59.4 PK	68.2	-8.8	2.49 V	175	48.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	120.1 PK			2.70 H	256	77.5	42.6
2	*5240.00	110.6 AV			2.70 H	256	68.0	42.6
3	5350.00	56.2 PK	74.0	-17.8	2.70 H	256	51.9	4.3
4	5350.00	42.8 AV	54.0	-11.2	2.70 H	256	38.5	4.3
5	#10480.00	58.6 PK	68.2	-9.6	2.16 H	26	47.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	127.1 PK			1.62 V	101	84.5	42.6
2	*5240.00	117.8 AV			1.62 V	101	75.2	42.6
3	5350.00	57.3 PK	74.0	-16.7	1.62 V	101	53.0	4.3
4	5350.00	44.3 AV	54.0	-9.7	1.62 V	101	40.0	4.3
5	#10480.00	59.9 PK	68.2	-8.3	2.38 V	162	48.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	2.62 H	247	52.5	4.5
2	5150.00	44.7 AV	54.0	-9.3	2.62 H	247	40.2	4.5
3	*5260.00	118.9 PK			2.62 H	247	76.3	42.6
4	*5260.00	109.2 AV			2.62 H	247	66.6	42.6
5	#10520.00	58.7 PK	68.2	-9.5	2.26 H	28	47.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.7 PK	74.0	-16.3	1.63 V	129	53.2	4.5
2	5150.00	45.5 AV	54.0	-8.5	1.63 V	129	41.0	4.5
3	*5260.00	126.4 PK			1.63 V	129	83.8	42.6
4	*5260.00	116.4 AV			1.63 V	129	73.8	42.6
5	#10520.00	59.3 PK	68.2	-8.9	2.43 V	177	48.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	121.1 PK			2.52 H	253	78.5	42.6
2	*5300.00	111.1 AV			2.52 H	253	68.5	42.6
3	10600.00	58.4 PK	74.0	-15.6	2.32 H	20	47.4	11.0
4	10600.00	46.0 AV	54.0	-8.0	2.32 H	20	35.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	127.6 PK			1.56 V	131	85.0	42.6
2	*5300.00	117.1 AV			1.56 V	131	74.5	42.6
3	10600.00	59.0 PK	74.0	-15.0	2.41 V	173	48.0	11.0
4	10600.00	47.5 AV	54.0	-6.5	2.41 V	173	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	116.0 PK			2.69 H	250	73.5	42.5
2	*5320.00	107.0 AV			2.69 H	250	64.5	42.5
3	5350.00	61.3 PK	74.0	-12.7	2.69 H	250	57.0	4.3
4	5350.00	44.0 AV	54.0	-10.0	2.69 H	250	39.7	4.3
5	10640.00	58.2 PK	74.0	-15.8	2.38 H	19	47.2	11.0
6	10640.00	46.3 AV	54.0	-7.7	2.38 H	19	35.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	125.5 PK			1.56 V	122	83.0	42.5
2	*5320.00	114.1 AV			1.56 V	122	71.6	42.5
3	5350.00	62.3 PK	74.0	-11.7	1.56 V	122	58.0	4.3
4	5350.00	44.1 AV	54.0	-9.9	1.56 V	122	39.8	4.3
5	10640.00	58.8 PK	74.0	-15.2	2.40 V	178	47.8	11.0
6	10640.00	47.5 AV	54.0	-6.5	2.40 V	178	36.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.4 PK	74.0	-16.6	1.23 H	194	52.8	4.6
2	5460.00	43.5 AV	54.0	-10.5	1.23 H	194	38.9	4.6
3	#5470.00	58.1 PK	68.2	-10.1	1.23 H	194	53.5	4.6
4	*5500.00	113.5 PK			1.23 H	194	70.8	42.7
5	*5500.00	102.2 AV			1.23 H	194	59.5	42.7
6	11000.00	58.3 PK	74.0	-15.7	2.42 H	43	46.7	11.6
7	11000.00	45.9 AV	54.0	-8.1	2.42 H	43	34.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.1 PK	74.0	-7.9	1.66 V	76	61.5	4.6
2	5460.00	44.9 AV	54.0	-9.1	1.66 V	76	40.3	4.6
3	#5470.00	66.5 PK	68.2	-1.7	1.66 V	76	61.9	4.6
4	*5500.00	126.8 PK			1.66 V	76	84.1	42.7
5	*5500.00	115.3 AV			1.66 V	76	72.6	42.7
6	11000.00	59.6 PK	74.0	-14.4	2.36 V	157	48.0	11.6
7	11000.00	47.2 AV	54.0	-6.8	2.36 V	157	35.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	116.1 PK			1.23 H	189	73.1	43.0
2	*5600.00	106.4 AV			1.23 H	189	63.4	43.0
3	11200.00	59.5 PK	74.0	-14.5	2.56 H	47	47.7	11.8
4	11200.00	46.4 AV	54.0	-7.6	2.56 H	47	34.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	128.7 PK			1.81 V	93	85.7	43.0
2	*5600.00	119.1 AV			1.81 V	93	76.1	43.0
3	11200.00	60.4 PK	74.0	-13.6	2.34 V	189	48.6	11.8
4	11200.00	48.5 AV	54.0	-5.5	2.34 V	189	36.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.8 PK			1.22 H	187	68.9	43.9
2	*5700.00	101.8 AV			1.22 H	187	57.9	43.9
3	#5725.00	57.1 PK	68.2	-11.1	1.22 H	187	51.3	5.8
4	11400.00	58.8 PK	74.0	-15.2	2.61 H	57	46.6	12.2
5	11400.00	46.7 AV	54.0	-7.3	2.61 H	57	34.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	125.8 PK			1.77 V	271	81.9	43.9
2	*5700.00	114.7 AV			1.77 V	271	70.8	43.9
3	#5725.00	66.6 PK	68.2	-1.6	1.77 V	271	60.8	5.8
4	11400.00	59.8 PK	74.0	-14.2	2.39 V	187	47.6	12.2
5	11400.00	47.7 AV	54.0	-6.3	2.39 V	187	35.5	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.7 PK	68.2	-12.5	1.26 H	188	51.1	4.6
2	*5720.00	117.6 PK			1.26 H	188	73.8	43.8
3	*5720.00	108.1 AV			1.26 H	188	64.3	43.8
4	#5850.00	57.6 PK	68.2	-10.6	1.26 H	188	51.4	6.2
5	11440.00	59.7 PK	74.0	-14.3	2.29 H	187	47.5	12.2
6	11440.00	47.6 AV	54.0	-6.4	2.29 H	187	35.4	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.4 PK	68.2	-11.8	1.84 V	271	51.8	4.6
2	*5720.00	130.3 PK			1.84 V	271	86.5	43.8
3	*5720.00	120.8 AV			1.84 V	271	77.0	43.8
4	#5850.00	58.3 PK	68.2	-9.9	1.84 V	271	52.1	6.2
5	11440.00	60.8 PK	74.0	-13.2	2.24 V	182	48.6	12.2
6	11440.00	48.6 AV	54.0	-5.4	2.24 V	182	36.4	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5612.80	61.1 PK	68.2	-7.1	1.21 H	198	55.9	5.2
2	*5745.00	120.9 PK			1.21 H	198	77.2	43.7
3	*5745.00	111.5 AV			1.21 H	198	67.8	43.7
4	#5933.20	62.0 PK	68.2	-6.2	1.21 H	198	56.1	5.9
5	11490.00	59.9 PK	74.0	-14.1	2.59 H	41	47.6	12.3
6	11490.00	47.7 AV	54.0	-6.3	2.59 H	41	35.4	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.60	63.6 PK	68.2	-4.6	1.87 V	271	58.0	5.6
2	*5745.00	131.7 PK			1.87 V	271	88.0	43.7
3	*5745.00	124.4 AV			1.87 V	271	80.7	43.7
4	#5955.60	62.6 PK	68.2	-5.6	1.87 V	271	56.8	5.8
5	11490.00	61.0 PK	74.0	-13.0	2.31 V	191	48.7	12.3
6	11490.00	48.8 AV	54.0	-5.2	2.31 V	191	36.5	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.80	61.0 PK	68.2	-7.2	1.80 H	192	55.4	5.6
2	*5785.00	122.4 PK			1.80 H	192	78.4	44.0
3	*5785.00	111.2 AV			1.80 H	192	67.2	44.0
4	#5958.80	62.1 PK	68.2	-6.1	1.80 H	192	56.2	5.9
5	11570.00	59.9 PK	74.0	-14.1	2.39 H	21	47.3	12.6
6	11570.00	48.0 AV	54.0	-6.0	2.39 H	21	35.4	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5615.20	61.9 PK	68.2	-6.3	1.79 V	285	56.7	5.2
2	*5785.00	131.6 PK			1.79 V	285	87.6	44.0
3	*5785.00	123.4 AV			1.79 V	285	79.4	44.0
4	#5935.20	62.8 PK	68.2	-5.4	1.79 V	285	56.9	5.9
5	11570.00	61.1 PK	74.0	-12.9	2.49 V	162	48.5	12.6
6	11570.00	48.9 AV	54.0	-5.1	2.49 V	162	36.3	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.00	61.3 PK	68.2	-6.9	1.32 H	178	55.7	5.6
2	*5825.00	122.1 PK			1.32 H	178	77.9	44.2
3	*5825.00	110.8 AV			1.32 H	178	66.6	44.2
4	#5938.80	63.2 PK	68.2	-5.0	1.32 H	178	57.3	5.9
5	11650.00	59.8 PK	74.0	-14.2	2.22 H	22	47.4	12.4
6	11650.00	47.0 AV	54.0	-7.0	2.22 H	22	34.6	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.60	61.3 PK	68.2	-6.9	1.75 V	273	55.7	5.6
2	*5825.00	130.8 PK			1.75 V	273	86.6	44.2
3	*5825.00	122.0 AV			1.75 V	273	77.8	44.2
4	#5969.60	62.0 PK	68.2	-6.2	1.75 V	273	56.1	5.9
5	11650.00	61.1 PK	74.0	-12.9	2.35 V	171	48.7	12.4
6	11650.00	48.9 AV	54.0	-5.1	2.35 V	171	36.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.00	59.1 PK	74.0	-14.9	2.57 H	255	54.6	4.5
2	5140.00	43.3 AV	54.0	-10.7	2.57 H	255	38.8	4.5
3	*5180.00	114.4 PK			2.57 H	255	72.0	42.4
4	*5180.00	104.4 AV			2.57 H	255	62.0	42.4
5	#10360.00	58.8 PK	68.2	-9.4	2.30 H	18	47.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.00	66.0 PK	74.0	-8.0	1.50 V	99	61.5	4.5
2	5140.00	46.5 AV	54.0	-7.5	1.50 V	99	42.0	4.5
3	*5180.00	123.7 PK			1.50 V	99	81.3	42.4
4	*5180.00	112.9 AV			1.50 V	99	70.5	42.4
5	#10360.00	60.2 PK	68.2	-8.0	2.44 V	175	48.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	114.1 PK			2.43 H	258	71.6	42.5
2	*5200.00	103.9 AV			2.43 H	258	61.4	42.5
3	#10400.00	58.5 PK	68.2	-9.7	2.30 H	19	47.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	124.1 PK			1.58 V	98	81.6	42.5
2	*5200.00	114.0 AV			1.58 V	98	71.5	42.5
3	#10400.00	59.3 PK	68.2	-8.9	2.41 V	180	48.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	118.7 PK			2.75 H	259	76.1	42.6
2	*5240.00	109.2 AV			2.75 H	259	66.6	42.6
3	5350.00	55.3 PK	74.0	-18.7	2.75 H	259	51.0	4.3
4	5350.00	42.7 AV	54.0	-11.3	2.75 H	259	38.4	4.3
5	#10480.00	58.6 PK	68.2	-9.6	2.33 H	19	47.2	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	125.5 PK			1.75 V	121	82.9	42.6
2	*5240.00	115.6 AV			1.75 V	121	73.0	42.6
3	5350.00	55.9 PK	74.0	-18.1	1.75 V	121	51.6	4.3
4	5350.00	43.8 AV	54.0	-10.2	1.75 V	121	39.5	4.3
5	#10480.00	59.5 PK	68.2	-8.7	2.45 V	167	48.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.5 PK	74.0	-17.5	2.58 H	250	52.0	4.5
2	5150.00	44.3 AV	54.0	-9.7	2.58 H	250	39.8	4.5
3	*5260.00	118.0 PK			2.58 H	250	75.4	42.6
4	*5260.00	108.1 AV			2.58 H	250	65.5	42.6
5	#10520.00	58.1 PK	68.2	-10.1	2.31 H	22	46.8	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.3 PK	74.0	-16.7	1.67 V	105	52.8	4.5
2	5150.00	45.2 AV	54.0	-8.8	1.67 V	105	40.7	4.5
3	*5260.00	125.1 PK			1.67 V	105	82.5	42.6
4	*5260.00	114.6 AV			1.67 V	105	72.0	42.6
5	#10520.00	59.1 PK	68.2	-9.1	2.41 V	179	47.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	119.4 PK			2.57 H	251	76.8	42.6
2	*5300.00	109.5 AV			2.57 H	251	66.9	42.6
3	10600.00	58.0 PK	74.0	-16.0	2.36 H	28	47.0	11.0
4	10600.00	45.8 AV	54.0	-8.2	2.36 H	28	34.8	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	126.4 PK			1.62 V	97	83.8	42.6
2	*5300.00	115.7 AV			1.62 V	97	73.1	42.6
3	10600.00	58.5 PK	74.0	-15.5	2.45 V	180	47.5	11.0
4	10600.00	47.2 AV	54.0	-6.8	2.45 V	180	36.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.9 PK			2.74 H	258	73.4	42.5
2	*5320.00	105.7 AV			2.74 H	258	63.2	42.5
3	5350.00	57.8 PK	74.0	-16.2	2.74 H	258	53.5	4.3
4	5350.00	44.1 AV	54.0	-9.9	2.74 H	258	39.8	4.3
5	10640.00	58.0 PK	74.0	-16.0	2.38 H	30	47.0	11.0
6	10640.00	46.1 AV	54.0	-7.9	2.38 H	30	35.1	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	122.7 PK			1.69 V	131	80.2	42.5
2	*5320.00	111.9 AV			1.69 V	131	69.4	42.5
3	5350.00	63.2 PK	74.0	-10.8	1.69 V	131	58.9	4.3
4	5350.00	45.1 AV	54.0	-8.9	1.69 V	131	40.8	4.3
5	10640.00	58.5 PK	74.0	-15.5	2.43 V	172	47.5	11.0
6	10640.00	47.2 AV	54.0	-6.8	2.43 V	172	36.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.0 PK	74.0	-16.0	1.21 H	191	53.4	4.6
2	5460.00	42.8 AV	54.0	-11.2	1.21 H	191	38.2	4.6
3	#5470.00	59.0 PK	68.2	-9.2	1.21 H	191	54.4	4.6
4	*5500.00	111.4 PK			1.21 H	191	68.7	42.7
5	*5500.00	100.5 AV			1.21 H	191	57.8	42.7
6	11000.00	57.9 PK	74.0	-16.1	2.53 H	51	46.3	11.6
7	11000.00	45.8 AV	54.0	-8.2	2.53 H	51	34.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.2 PK	74.0	-15.8	1.68 V	77	53.6	4.6
2	5460.00	45.1 AV	54.0	-8.9	1.68 V	77	40.5	4.6
3	#5470.00	66.6 PK	68.2	-1.6	1.68 V	77	62.0	4.6
4	*5500.00	122.8 PK			1.68 V	77	80.1	42.7
5	*5500.00	112.4 AV			1.68 V	77	69.7	42.7
6	11000.00	59.5 PK	74.0	-14.5	2.39 V	184	47.9	11.6
7	11000.00	47.3 AV	54.0	-6.7	2.39 V	184	35.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.3 PK			1.24 H	193	70.3	43.0
2	*5600.00	103.5 AV			1.24 H	193	60.5	43.0
3	11200.00	59.4 PK	74.0	-14.6	2.58 H	42	47.6	11.8
4	11200.00	46.4 AV	54.0	-7.6	2.58 H	42	34.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	126.4 PK			1.83 V	50	83.4	43.0
2	*5600.00	116.6 AV			1.83 V	50	73.6	43.0
3	11200.00	60.3 PK	74.0	-13.7	2.31 V	188	48.5	11.8
4	11200.00	48.4 AV	54.0	-5.6	2.31 V	188	36.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	110.2 PK			1.24 H	195	66.3	43.9
2	*5700.00	99.8 AV			1.24 H	195	55.9	43.9
3	#5725.00	57.6 PK	68.2	-10.6	1.24 H	195	51.8	5.8
4	11400.00	58.8 PK	74.0	-15.2	2.56 H	59	46.6	12.2
5	11400.00	46.7 AV	54.0	-7.3	2.56 H	59	34.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	123.1 PK			1.84 V	270	79.2	43.9
2	*5700.00	112.7 AV			1.84 V	270	68.8	43.9
3	#5725.00	65.9 PK	68.2	-2.3	1.84 V	270	60.1	5.8
4	11400.00	59.8 PK	74.0	-14.2	2.41 V	194	47.6	12.2
5	11400.00	47.6 AV	54.0	-6.4	2.41 V	194	35.4	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.0 PK	68.2	-12.2	1.23 H	187	51.4	4.6
2	*5720.00	115.3 PK			1.23 H	187	71.5	43.8
3	*5720.00	105.5 AV			1.23 H	187	61.7	43.8
4	#5850.00	57.4 PK	68.2	-10.8	1.23 H	187	51.2	6.2
5	11440.00	59.5 PK	74.0	-14.5	2.56 H	47	47.3	12.2
6	11440.00	47.5 AV	54.0	-6.5	2.56 H	47	35.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.7 PK	68.2	-11.5	1.85 V	270	52.1	4.6
2	*5720.00	128.3 PK			1.85 V	270	84.5	43.8
3	*5720.00	118.4 AV			1.85 V	270	74.6	43.8
4	#5850.00	58.4 PK	68.2	-9.8	1.85 V	270	52.2	6.2
5	11440.00	60.7 PK	74.0	-13.3	2.21 V	187	48.5	12.2
6	11440.00	48.6 AV	54.0	-5.4	2.21 V	187	36.4	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.00	61.8 PK	68.2	-6.4	1.26 H	187	56.5	5.3
2	*5745.00	118.0 PK			4.00 H	187	74.3	43.7
3	*5745.00	107.9 AV			4.00 H	187	64.2	43.7
4	#5965.60	62.9 PK	68.2	-5.3	1.26 H	187	57.0	5.9
5	11490.00	59.6 PK	74.0	-14.4	2.64 H	48	47.3	12.3
6	11490.00	47.4 AV	54.0	-6.6	2.64 H	48	35.1	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5647.20	63.2 PK	68.2	-5.0	1.86 V	270	57.5	5.7
2	*5745.00	130.9 PK			1.86 V	270	87.2	43.7
3	*5745.00	120.7 AV			1.86 V	270	77.0	43.7
4	#5994.40	62.2 PK	68.2	-6.0	1.86 V	270	56.0	6.2
5	11490.00	60.8 PK	74.0	-13.2	2.23 V	182	48.5	12.3
6	11490.00	48.7 AV	54.0	-5.3	2.23 V	182	36.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	61.4 PK	68.2	-6.8	1.35 H	199	55.8	5.6
2	*5785.00	118.0 PK			1.35 H	199	74.0	44.0
3	*5785.00	107.0 AV			1.35 H	199	63.0	44.0
4	#5988.40	63.2 PK	68.2	-5.0	1.35 H	199	57.0	6.2
5	11570.00	60.0 PK	74.0	-14.0	2.30 H	30	47.4	12.6
6	11570.00	47.6 AV	54.0	-6.4	2.30 H	30	35.0	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5615.60	62.4 PK	68.2	-5.8	1.81 V	281	57.2	5.2
2	*5785.00	130.2 PK			1.81 V	281	86.2	44.0
3	*5785.00	121.7 AV			1.81 V	281	77.7	44.0
4	#5938.00	62.4 PK	68.2	-5.8	1.81 V	281	56.5	5.9
5	11570.00	61.2 PK	74.0	-12.8	2.40 V	178	48.6	12.6
6	11570.00	48.9 AV	54.0	-5.1	2.40 V	178	36.3	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.60	61.3 PK	68.2	-6.9	1.30 H	189	55.7	5.6
2	*5825.00	117.7 PK			1.30 H	189	73.5	44.2
3	*5825.00	107.0 AV			1.30 H	189	62.8	44.2
4	#5938.00	61.9 PK	68.2	-6.3	1.30 H	189	56.0	5.9
5	11650.00	60.0 PK	74.0	-14.0	2.15 H	19	47.6	12.4
6	11650.00	46.9 AV	54.0	-7.1	2.15 H	19	34.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	61.4 PK	68.2	-6.8	1.88 V	281	55.7	5.7
2	*5825.00	130.2 PK			1.88 V	281	86.0	44.2
3	*5825.00	121.4 AV			1.88 V	281	77.2	44.2
4	#5943.60	64.5 PK	68.2	-3.7	1.88 V	281	58.7	5.8
5	11650.00	60.8 PK	74.0	-13.2	2.45 V	178	48.4	12.4
6	11650.00	48.6 AV	54.0	-5.4	2.45 V	178	36.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.00	59.0 PK	74.0	-15.0	2.66 H	257	54.5	4.5
2	5140.00	43.5 AV	54.0	-10.5	2.66 H	257	39.0	4.5
3	*5180.00	112.9 PK			2.66 H	257	70.5	42.4
4	*5180.00	104.0 AV			2.66 H	257	61.6	42.4
5	#10360.00	58.8 PK	68.2	-9.4	2.44 H	18	47.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5140.00	64.5 PK	74.0	-9.5	1.55 V	89	60.0	4.5
2	5140.00	46.1 AV	54.0	-7.9	1.55 V	89	41.6	4.5
3	*5180.00	122.4 PK			1.55 V	89	80.0	42.4
4	*5180.00	111.2 AV			1.55 V	89	68.8	42.4
5	#10360.00	59.9 PK	68.2	-8.3	2.41 V	176	48.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	113.0 PK			2.62 H	243	70.5	42.5
2	*5200.00	103.3 AV			2.62 H	243	60.8	42.5
3	#10400.00	58.7 PK	68.2	-9.5	2.32 H	21	47.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	123.3 PK			1.51 V	88	80.8	42.5
2	*5200.00	112.6 AV			1.51 V	88	70.1	42.5
3	#10400.00	59.9 PK	68.2	-8.3	2.44 V	171	48.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	115.1 PK			2.67 H	265	72.5	42.6
2	*5240.00	105.1 AV			2.67 H	265	62.5	42.6
3	5350.00	54.8 PK	74.0	-19.2	2.67 H	265	50.5	4.3
4	5350.00	42.3 AV	54.0	-11.7	2.67 H	265	38.0	4.3
5	#10480.00	58.9 PK	68.2	-9.3	2.22 H	30	47.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	122.6 PK			1.74 V	94	80.0	42.6
2	*5240.00	112.6 AV			1.74 V	94	70.0	42.6
3	5350.00	55.5 PK	74.0	-18.5	1.74 V	94	51.2	4.3
4	5350.00	43.8 AV	54.0	-10.2	1.74 V	94	39.5	4.3
5	#10480.00	59.9 PK	68.2	-8.3	2.43 V	162	48.5	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.0 PK	74.0	-18.0	2.68 H	254	51.5	4.5
2	5150.00	44.3 AV	54.0	-9.7	2.68 H	254	39.8	4.5
3	*5260.00	116.6 PK			2.68 H	254	74.0	42.6
4	*5260.00	106.8 AV			2.68 H	254	64.2	42.6
5	#10520.00	58.3 PK	68.2	-9.9	2.38 H	21	47.0	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.4 PK	74.0	-16.6	1.68 V	94	52.9	4.5
2	5150.00	45.2 AV	54.0	-8.8	1.68 V	94	40.7	4.5
3	*5260.00	124.6 PK			1.68 V	94	82.0	42.6
4	*5260.00	114.1 AV			1.68 V	94	71.5	42.6
5	#10520.00	59.4 PK	68.2	-8.8	2.44 V	172	48.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.1 PK			2.61 H	247	77.5	42.6
2	*5300.00	109.4 AV			2.61 H	247	66.8	42.6
3	10600.00	58.0 PK	74.0	-16.0	2.28 H	36	47.0	11.0
4	10600.00	45.9 AV	54.0	-8.1	2.28 H	36	34.9	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	124.5 PK			1.58 V	122	81.9	42.6
2	*5300.00	114.4 AV			1.58 V	122	71.8	42.6
3	10600.00	58.9 PK	74.0	-15.1	2.50 V	183	47.9	11.0
4	10600.00	47.0 AV	54.0	-7.0	2.50 V	183	36.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	114.0 PK			2.66 H	251	71.5	42.5
2	*5320.00	103.7 AV			2.66 H	251	61.2	42.5
3	5350.00	58.5 PK	74.0	-15.5	2.66 H	251	54.2	4.3
4	5350.00	43.3 AV	54.0	-10.7	2.66 H	251	39.0	4.3
5	10640.00	57.8 PK	74.0	-16.2	2.06 H	9	46.8	11.0
6	10640.00	46.0 AV	54.0	-8.0	2.06 H	9	35.0	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.7 PK			1.61 V	83	78.2	42.5
2	*5320.00	110.1 AV			1.61 V	83	67.6	42.5
3	5350.00	63.5 PK	74.0	-10.5	1.61 V	83	59.2	4.3
4	5350.00	45.3 AV	54.0	-8.7	1.61 V	83	41.0	4.3
5	10640.00	58.6 PK	74.0	-15.4	2.33 V	182	47.6	11.0
6	10640.00	47.1 AV	54.0	-6.9	2.33 V	182	36.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.8 PK	74.0	-17.2	1.21 H	193	52.2	4.6
2	5460.00	43.0 AV	54.0	-11.0	1.21 H	193	38.4	4.6
3	#5470.00	57.8 PK	68.2	-10.4	1.21 H	193	53.2	4.6
4	*5500.00	109.6 PK			1.21 H	193	66.9	42.7
5	*5500.00	98.4 AV			1.21 H	193	55.7	42.7
6	11000.00	57.8 PK	74.0	-16.2	2.59 H	56	46.2	11.6
7	11000.00	45.6 AV	54.0	-8.4	2.59 H	56	34.0	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	61.5 PK	74.0	-12.5	1.63 V	92	56.9	4.6
2	5460.00	45.7 AV	54.0	-8.3	1.63 V	92	41.1	4.6
3	#5470.00	62.2 PK	68.2	-6.0	1.63 V	92	57.6	4.6
4	*5500.00	122.4 PK			1.63 V	92	79.7	42.7
5	*5500.00	111.2 AV			1.63 V	92	68.5	42.7
6	11000.00	59.5 PK	74.0	-14.5	2.43 V	185	47.9	11.6
7	11000.00	47.2 AV	54.0	-6.8	2.43 V	185	35.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.6 PK			1.26 H	192	70.6	43.0
2	*5600.00	102.7 AV			1.26 H	192	59.7	43.0
3	11200.00	59.3 PK	74.0	-14.7	2.55 H	49	47.5	11.8
4	11200.00	46.1 AV	54.0	-7.9	2.55 H	49	34.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	125.8 PK			1.80 V	94	82.8	43.0
2	*5600.00	115.5 AV			1.80 V	94	72.5	43.0
3	11200.00	60.2 PK	74.0	-13.8	2.26 V	184	48.4	11.8
4	11200.00	48.1 AV	54.0	-5.9	2.26 V	184	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.7 PK			1.15 H	187	64.8	43.9
2	*5700.00	97.5 AV			1.15 H	187	53.6	43.9
3	#5725.00	57.1 PK	68.2	-11.1	1.15 H	187	51.3	5.8
4	11400.00	58.5 PK	74.0	-15.5	2.53 H	54	46.3	12.2
5	11400.00	46.5 AV	54.0	-7.5	2.53 H	54	34.3	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.4 PK			1.83 V	271	77.5	43.9
2	*5700.00	110.3 AV			1.83 V	271	66.4	43.9
3	#5725.00	63.2 PK	68.2	-5.0	1.83 V	271	57.4	5.8
4	11400.00	59.6 PK	74.0	-14.4	2.32 V	181	47.4	12.2
5	11400.00	47.5 AV	54.0	-6.5	2.32 V	181	35.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.8 PK	68.2	-12.4	1.18 H	195	51.2	4.6
2	*5720.00	114.4 PK			1.18 H	195	70.6	43.8
3	*5720.00	102.6 AV			1.18 H	195	58.8	43.8
4	#5850.00	57.5 PK	68.2	-10.7	1.18 H	195	51.3	6.2
5	11440.00	59.4 PK	74.0	-14.6	2.64 H	43	47.2	12.2
6	11440.00	47.3 AV	54.0	-6.7	2.64 H	43	35.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.3 PK	68.2	-11.9	1.86 V	269	51.7	4.6
2	*5720.00	127.4 PK			1.86 V	269	83.6	43.8
3	*5720.00	115.4 AV			1.86 V	269	71.6	43.8
4	#5850.00	57.9 PK	68.2	-10.3	1.86 V	269	51.7	6.2
5	11440.00	60.6 PK	74.0	-13.4	2.33 V	189	48.4	12.2
6	11440.00	48.5 AV	54.0	-5.5	2.33 V	189	36.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.00	60.7 PK	68.2	-7.5	1.24 H	186	55.1	5.6
2	*5745.00	116.3 PK			1.24 H	186	72.6	43.7
3	*5745.00	105.4 AV			1.24 H	186	61.7	43.7
4	#5966.80	62.5 PK	68.2	-5.7	1.24 H	186	56.6	5.9
5	11490.00	59.4 PK	74.0	-14.6	2.55 H	43	47.1	12.3
6	11490.00	47.3 AV	54.0	-6.7	2.55 H	43	35.0	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.80	63.4 PK	68.2	-4.8	1.85 V	272	57.7	5.7
2	*5745.00	129.2 PK			1.85 V	272	85.5	43.7
3	*5745.00	118.2 AV			1.85 V	272	74.5	43.7
4	#5987.20	62.8 PK	68.2	-5.4	1.85 V	272	56.6	6.2
5	11490.00	60.7 PK	74.0	-13.3	2.27 V	189	48.4	12.3
6	11490.00	48.5 AV	54.0	-5.5	2.27 V	189	36.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.40	61.5 PK	68.2	-6.7	1.22 H	181	56.1	5.4
2	*5785.00	115.4 PK			1.22 H	181	71.4	44.0
3	*5785.00	104.1 AV			1.22 H	181	60.1	44.0
4	#5961.20	64.1 PK	68.2	-4.1	1.22 H	181	58.2	5.9
5	11570.00	59.7 PK	74.0	-14.3	2.22 H	48	47.1	12.6
6	11570.00	47.1 AV	54.0	-6.9	2.22 H	48	34.5	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5615.20	63.2 PK	68.2	-5.0	1.89 V	266	58.0	5.2
2	*5785.00	129.4 PK			1.89 V	266	85.4	44.0
3	*5785.00	119.1 AV			1.89 V	266	75.1	44.0
4	#5936.00	62.8 PK	68.2	-5.4	1.89 V	266	56.9	5.9
5	11570.00	61.3 PK	74.0	-12.7	2.50 V	187	48.7	12.6
6	11570.00	49.1 AV	54.0	-4.9	2.50 V	187	36.5	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.20	61.6 PK	68.2	-6.6	1.80 H	192	56.5	5.1
2	*5825.00	115.7 PK			1.23 H	180	71.5	44.2
3	*5825.00	104.7 AV			1.23 H	180	60.5	44.2
4	#5969.20	62.5 PK	68.2	-5.7	1.80 H	192	56.6	5.9
5	11650.00	59.5 PK	74.0	-14.5	2.22 H	25	47.1	12.4
6	11650.00	46.9 AV	54.0	-7.1	2.22 H	25	34.5	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5644.40	62.2 PK	68.2	-6.0	1.72 V	286	56.6	5.6
2	*5825.00	129.7 PK			1.72 V	286	85.5	44.2
3	*5825.00	118.5 AV			1.72 V	286	74.3	44.2
4	#5963.60	62.1 PK	68.2	-6.1	1.72 V	286	56.2	5.9
5	11650.00	61.1 PK	74.0	-12.9	2.34 V	161	48.7	12.4
6	11650.00	48.7 AV	54.0	-5.3	2.34 V	161	36.3	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.1 PK			1.62 H	219	70.5	42.6
2	*5240.00	103.2 AV			1.62 H	219	60.6	42.6
3	5350.00	55.6 PK	74.0	-18.4	1.62 H	219	51.3	4.3
4	5350.00	43.0 AV	54.0	-11.0	1.62 H	219	38.7	4.3
5	#10480.00	58.2 PK	68.2	-10.0	2.56 H	54	46.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	124.1 PK			1.49 V	95	81.5	42.6
2	*5240.00	114.3 AV			1.49 V	95	71.7	42.6
3	5350.00	56.6 PK	74.0	-17.4	1.49 V	95	52.3	4.3
4	5350.00	43.7 AV	54.0	-10.3	1.49 V	95	39.4	4.3
5	#10480.00	59.5 PK	68.2	-8.7	2.47 V	172	48.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	116.1 PK			1.57 H	221	73.5	42.6
2	*5300.00	105.0 AV			1.57 H	221	62.4	42.6
3	10600.00	57.6 PK	74.0	-16.4	2.51 H	58	46.6	11.0
4	10600.00	45.3 AV	54.0	-8.7	2.51 H	58	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	127.4 PK			1.57 V	99	84.8	42.6
2	*5300.00	116.2 AV			1.57 V	99	73.6	42.6
3	10600.00	59.1 PK	74.0	-14.9	2.38 V	176	48.1	11.0
4	10600.00	46.8 AV	54.0	-7.2	2.38 V	176	35.8	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	115.9 PK			1.56 H	213	72.9	43.0
2	*5600.00	105.5 AV			1.56 H	213	62.5	43.0
3	11200.00	59.3 PK	74.0	-14.7	2.53 H	59	47.5	11.8
4	11200.00	47.1 AV	54.0	-6.9	2.53 H	59	35.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	127.4 PK			1.64 V	86	84.4	43.0
2	*5600.00	116.8 AV			1.64 V	86	73.8	43.0
3	11200.00	61.6 PK	74.0	-12.4	2.43 V	184	49.8	11.8
4	11200.00	48.6 AV	54.0	-5.4	2.43 V	184	36.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.20	61.1 PK	68.2	-7.1	1.71 H	228	55.5	5.6
2	*5785.00	119.2 PK			1.71 H	228	75.2	44.0
3	*5785.00	108.4 AV			1.71 H	228	64.4	44.0
4	#5997.60	62.7 PK	68.2	-5.5	1.71 H	228	56.5	6.2
5	11570.00	61.5 PK	74.0	-12.5	2.55 H	47	48.9	12.6
6	11570.00	49.4 AV	54.0	-4.6	2.55 H	47	36.8	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.00	61.7 PK	68.2	-6.5	1.83 V	105	56.4	5.3
2	*5785.00	130.3 PK			1.83 V	105	86.3	44.0
3	*5785.00	119.6 AV			1.83 V	105	75.6	44.0
4	#5952.80	62.3 PK	68.2	-5.9	1.83 V	105	56.5	5.8
5	11570.00	62.7 PK	74.0	-11.3	2.47 V	184	50.1	12.6
6	11570.00	50.2 AV	54.0	-3.8	2.47 V	184	37.6	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	113.3 PK			1.63 H	221	70.7	42.6
2	*5240.00	100.8 AV			1.63 H	221	58.2	42.6
3	5350.00	55.4 PK	74.0	-18.6	1.63 H	221	51.1	4.3
4	5350.00	42.6 AV	54.0	-11.4	1.63 H	221	38.3	4.3
5	#10480.00	58.1 PK	68.2	-10.1	2.59 H	54	46.7	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	123.7 PK			1.52 V	98	81.1	42.6
2	*5240.00	111.4 AV			1.52 V	98	68.8	42.6
3	5350.00	56.1 PK	74.0	-17.9	1.52 V	98	51.8	4.3
4	5350.00	43.5 AV	54.0	-10.5	1.52 V	98	39.2	4.3
5	#10480.00	59.4 PK	68.2	-8.8	2.52 V	181	48.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	112.3 PK			1.55 H	217	69.7	42.6
2	*5300.00	102.2 AV			1.55 H	217	59.6	42.6
3	10600.00	57.5 PK	74.0	-16.5	2.63 H	51	46.5	11.0
4	10600.00	45.3 AV	54.0	-8.7	2.63 H	51	34.3	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	123.4 PK			1.56 V	103	80.8	42.6
2	*5300.00	113.4 AV			1.56 V	103	70.8	42.6
3	10600.00	58.9 PK	74.0	-15.1	2.41 V	179	47.9	11.0
4	10600.00	46.7 AV	54.0	-7.3	2.41 V	179	35.7	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	113.6 PK			1.52 H	214	70.6	43.0
2	*5600.00	103.2 AV			1.52 H	214	60.2	43.0
3	11200.00	59.2 PK	74.0	-14.8	2.58 H	57	47.4	11.8
4	11200.00	47.1 AV	54.0	-6.9	2.58 H	57	35.3	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	124.8 PK			1.63 V	84	81.8	43.0
2	*5600.00	114.1 AV			1.63 V	84	71.1	43.0
3	11200.00	61.3 PK	74.0	-12.7	2.41 V	189	49.5	11.8
4	11200.00	48.2 AV	54.0	-5.8	2.41 V	189	36.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) 106+26-tone MRU	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.00	60.9 PK	68.2	-7.3	1.72 H	227	55.4	5.5
2	*5785.00	116.4 PK			1.72 H	227	72.4	44.0
3	*5785.00	105.8 AV			1.72 H	227	61.8	44.0
4	#5976.40	62.3 PK	68.2	-5.9	1.72 H	227	56.2	6.1
5	11570.00	61.5 PK	74.0	-12.5	2.56 H	55	48.9	12.6
6	11570.00	49.4 AV	54.0	-4.6	2.56 H	55	36.8	12.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.20	61.5 PK	68.2	-6.7	1.85 V	102	55.9	5.6
2	*5785.00	127.4 PK			1.85 V	102	83.4	44.0
3	*5785.00	117.4 AV			1.85 V	102	73.4	44.0
4	#5974.40	62.3 PK	68.2	-5.9	1.85 V	102	56.2	6.1
5	11570.00	62.5 PK	74.0	-11.5	2.43 V	187	49.9	12.6
6	11570.00	50.1 AV	54.0	-3.9	2.43 V	187	37.5	12.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 42 : 5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.71 H	221	54.5	4.5
2	5150.00	45.3 AV	54.0	-8.7	1.71 H	221	40.8	4.5
3	*5210.00	102.4 PK			1.71 H	221	59.9	42.5
4	*5210.00	90.0 AV			1.71 H	221	47.5	42.5
5	#10420.00	57.3 PK	68.2	-10.9	2.13 H	54	45.9	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.0 PK	74.0	-6.0	1.76 V	97	63.5	4.5
2	5150.00	52.5 AV	54.0	-1.5	1.76 V	97	48.0	4.5
3	*5210.00	111.4 PK			1.76 V	97	68.9	42.5
4	*5210.00	99.9 AV			1.76 V	97	57.4	42.5
5	#10420.00	58.7 PK	68.2	-9.5	2.55 V	172	47.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 58 : 5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	102.6 PK			1.77 H	221	60.0	42.6
2	*5290.00	90.2 AV			1.77 H	221	47.6	42.6
3	5350.00	62.3 PK	74.0	-11.7	1.78 H	221	58.0	4.3
4	5350.00	45.1 AV	54.0	-8.9	1.78 H	221	40.8	4.3
5	#10580.00	56.6 PK	68.2	-11.6	2.17 H	52	45.5	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	112.5 PK			1.72 V	80	69.9	42.6
2	*5290.00	98.9 AV			1.72 V	80	56.3	42.6
3	5350.00	70.3 PK	74.0	-3.7	1.72 V	221	66.0	4.3
4	5350.00	52.3 AV	54.0	-1.7	1.72 V	221	48.0	4.3
5	#10580.00	59.1 PK	68.2	-9.1	2.62 V	183	48.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 138 : 5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	55.8 PK	68.2	-12.4	2.11 H	258	51.2	4.6
2	*5690.00	106.9 PK			2.11 H	258	63.1	43.8
3	*5690.00	95.8 AV			2.11 H	258	52.0	43.8
4	#5850.00	57.5 PK	68.2	-10.7	2.11 H	258	51.3	6.2
5	11380.00	58.5 PK	74.0	-15.5	2.22 H	68	46.5	12.0
6	11380.00	46.0 AV	54.0	-8.0	2.22 H	68	34.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	59.1 PK	68.2	-9.1	1.76 V	86	54.5	4.6
2	*5690.00	118.2 PK			1.76 V	86	74.4	43.8
3	*5690.00	107.3 AV			1.76 V	86	63.5	43.8
4	#5850.00	66.7 PK	68.2	-1.5	1.76 V	86	60.5	6.2
5	11380.00	60.6 PK	74.0	-13.4	2.66 V	185	48.6	12.0
6	11380.00	47.4 AV	54.0	-6.6	2.66 V	185	35.4	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) 484+242-tone MRU	Channel	CH 155 : 5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.40	61.4 PK	68.2	-6.8	2.62 H	257	56.1	5.3
2	*5775.00	106.9 PK			2.62 H	257	62.9	44.0
3	*5775.00	96.0 AV			2.62 H	257	52.0	44.0
4	#5987.60	61.8 PK	68.2	-6.4	2.62 H	257	55.6	6.2
5	11550.00	60.9 PK	74.0	-13.1	2.10 H	54	48.5	12.4
6	11550.00	48.7 AV	54.0	-5.3	2.10 H	54	36.3	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.80	66.7 PK	68.2	-1.5	1.71 V	90	61.0	5.7
2	*5775.00	117.0 PK			1.71 V	90	73.0	44.0
3	*5775.00	106.3 AV			1.71 V	90	62.3	44.0
4	#5925.20	66.2 PK	68.2	-2.0	1.71 V	90	60.3	5.9
5	11550.00	62.5 PK	74.0	-11.5	2.62 V	187	50.1	12.4
6	11550.00	50.6 AV	54.0	-3.4	2.62 V	187	38.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.3 PK	74.0	-10.7	2.22 H	259	58.8	4.5
2	5150.00	46.1 AV	54.0	-7.9	2.22 H	259	41.6	4.5
3	*5250.00	98.5 PK			2.22 H	259	55.9	42.6
4	*5250.00	85.9 AV			2.22 H	259	43.3	42.6
5	5350.00	62.8 PK	74.0	-11.2	2.22 H	259	58.5	4.3
6	5350.00	47.3 AV	54.0	-6.7	2.22 H	259	43.0	4.3
7	#10500.00	56.9 PK	68.2	-11.3	2.11 H	60	45.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	1.69 V	97	65.9	4.5
2	5150.00	52.2 AV	54.0	-1.8	1.69 V	97	47.7	4.5
3	*5250.00	109.2 PK			1.69 V	97	66.6	42.6
4	*5250.00	96.2 AV			1.69 V	97	53.6	42.6
5	5350.00	68.8 PK	74.0	-5.2	1.69 V	97	64.5	4.3
6	5350.00	52.5 AV	54.0	-1.5	1.69 V	97	48.2	4.3
7	#10500.00	58.7 PK	68.2	-9.5	2.54 V	177	47.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.1 PK	74.0	-16.9	2.07 H	259	52.5	4.6
2	5460.00	44.8 AV	54.0	-9.2	2.07 H	259	40.2	4.6
3	#5470.00	59.1 PK	68.2	-9.1	2.07 H	259	54.5	4.6
4	*5570.00	98.2 PK			2.07 H	259	55.5	42.7
5	*5570.00	85.7 AV			2.07 H	259	43.0	42.7
6	#5725.00	58.8 PK	68.2	-9.4	2.07 H	259	53.0	5.8
7	11140.00	58.1 PK	74.0	-15.9	2.10 H	58	46.3	11.8
8	11140.00	45.8 AV	54.0	-8.2	2.10 H	58	34.0	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	67.1 PK	74.0	-6.9	1.74 V	85	62.5	4.6
2	5460.00	50.2 AV	54.0	-3.8	1.74 V	85	45.6	4.6
3	#5470.00	66.6 PK	68.2	-1.6	1.74 V	85	62.0	4.6
4	*5570.00	109.0 PK			1.74 V	85	66.3	42.7
5	*5570.00	97.2 AV			1.74 V	85	54.5	42.7
6	#5725.00	64.3 PK	68.2	-3.9	1.74 V	85	58.5	5.8
7	11140.00	60.1 PK	74.0	-13.9	2.62 V	180	48.3	11.8
8	11140.00	47.0 AV	54.0	-7.0	2.62 V	180	35.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 50 : 5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	2.25 H	259	56.0	4.5
2	5150.00	45.5 AV	54.0	-8.5	2.25 H	259	41.0	4.5
3	*5250.00	97.4 PK			2.25 H	259	54.8	42.6
4	*5250.00	85.6 AV			2.25 H	259	43.0	42.6
5	5350.00	58.8 PK	74.0	-15.2	2.25 H	259	54.5	4.3
6	5350.00	45.8 AV	54.0	-8.2	2.25 H	259	41.5	4.3
7	#10500.00	56.7 PK	68.2	-11.5	2.06 H	40	45.3	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.3 PK	74.0	-8.7	1.77 V	95	60.8	4.5
2	5150.00	49.3 AV	54.0	-4.7	1.77 V	95	44.8	4.5
3	*5250.00	108.1 PK			1.77 V	95	65.5	42.6
4	*5250.00	95.8 AV			1.77 V	95	53.2	42.6
5	5350.00	68.8 PK	74.0	-5.2	1.77 V	95	64.5	4.3
6	5350.00	52.4 AV	54.0	-1.6	1.77 V	95	48.1	4.3
7	#10500.00	58.7 PK	68.2	-9.5	2.52 V	172	47.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) 996+484+242-tone MRU	Channel	CH 114 : 5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.6 PK	74.0	-16.4	2.32 H	257	53.0	4.6
2	5460.00	44.6 AV	54.0	-9.4	2.32 H	257	40.0	4.6
3	#5470.00	59.0 PK	68.2	-9.2	2.32 H	257	54.4	4.6
4	*5570.00	97.1 PK			2.32 H	257	54.4	42.7
5	*5570.00	85.7 AV			2.32 H	257	43.0	42.7
6	#5725.00	58.8 PK	68.2	-9.4	2.32 H	257	53.0	5.8
7	11140.00	58.3 PK	74.0	-15.7	2.11 H	55	46.5	11.8
8	11140.00	45.8 AV	54.0	-8.2	2.11 H	55	34.0	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	66.8 PK	74.0	-7.2	1.80 V	83	62.2	4.6
2	5460.00	50.6 AV	54.0	-3.4	1.80 V	83	46.0	4.6
3	#5470.00	66.6 PK	68.2	-1.6	1.80 V	83	62.0	4.6
4	*5570.00	109.3 PK			1.80 V	83	66.6	42.7
5	*5570.00	97.2 AV			1.80 V	83	54.5	42.7
6	#5725.00	63.6 PK	68.2	-4.6	1.80 V	83	57.8	5.8
7	11140.00	60.3 PK	74.0	-13.7	2.62 V	175	48.5	11.8
8	11140.00	47.0 AV	54.0	-7.0	2.62 V	175	35.2	11.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


Plot of Band Edge

1TX (Test Mode A - PIFA Antenna)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

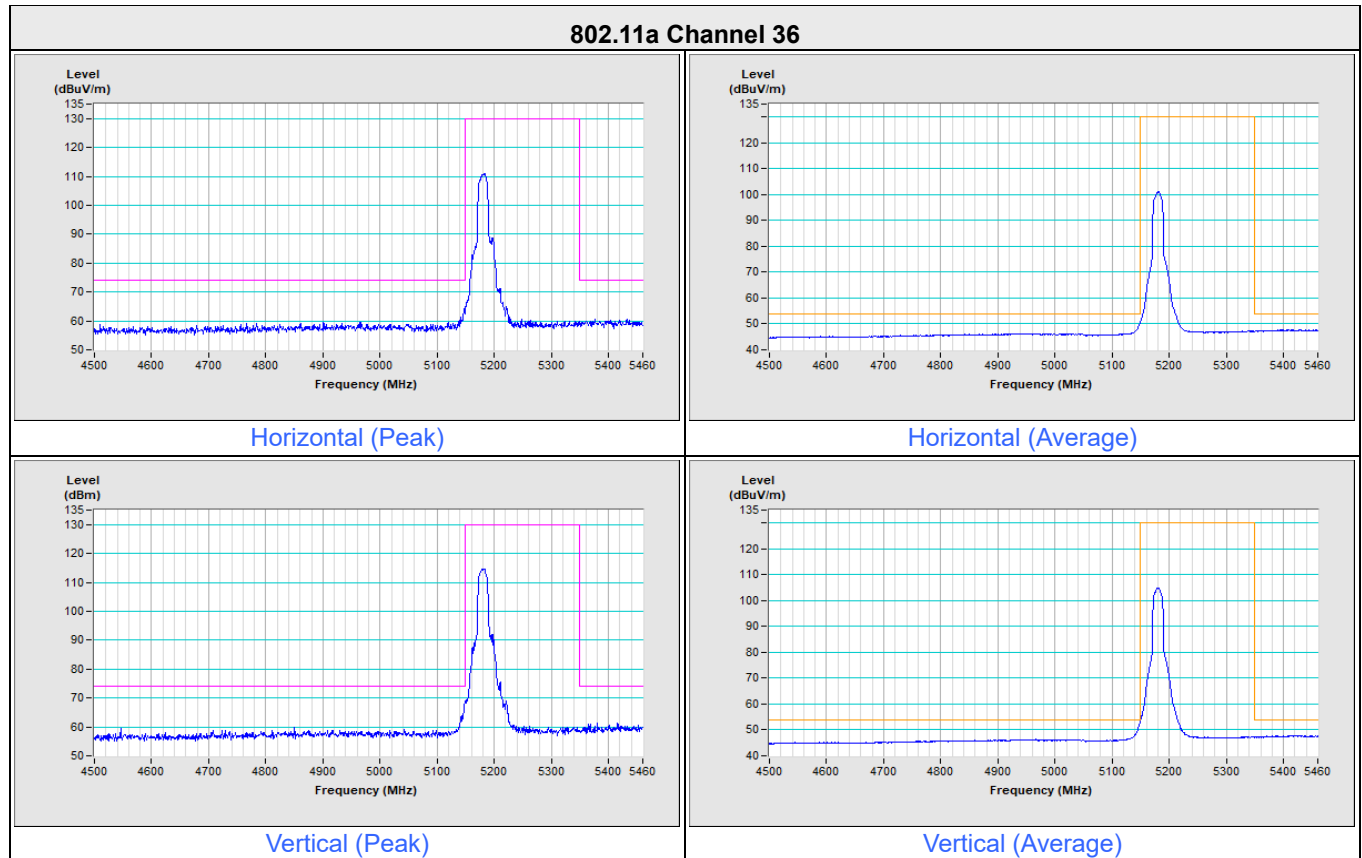


802.11a Channel 48

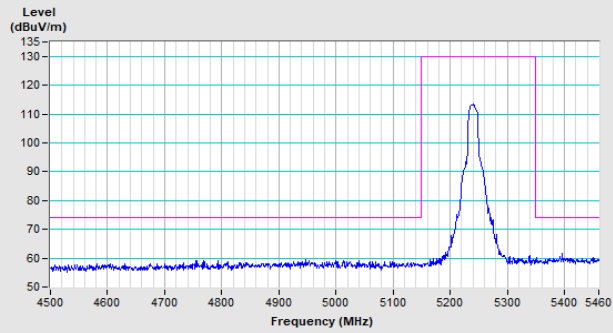


Horizontal (Peak)

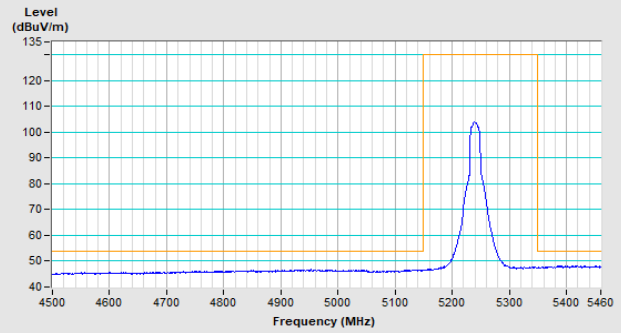

Horizontal (Average)

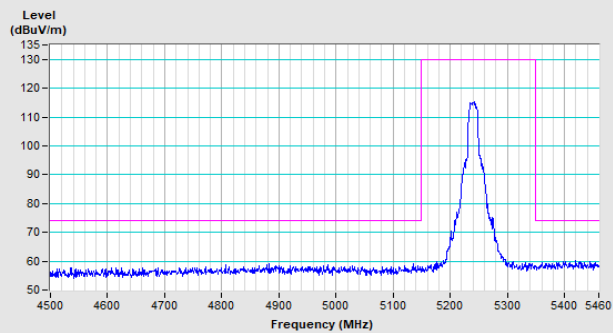


Vertical (Peak)

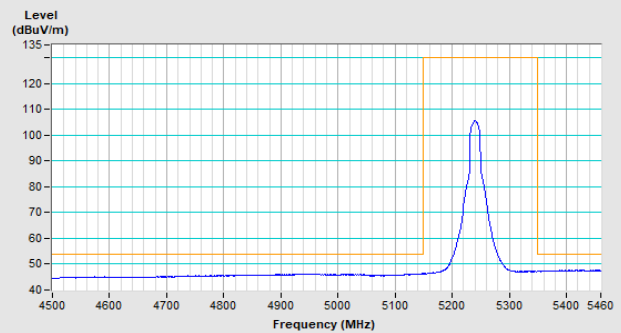


Vertical (Average)


802.11a Channel 52

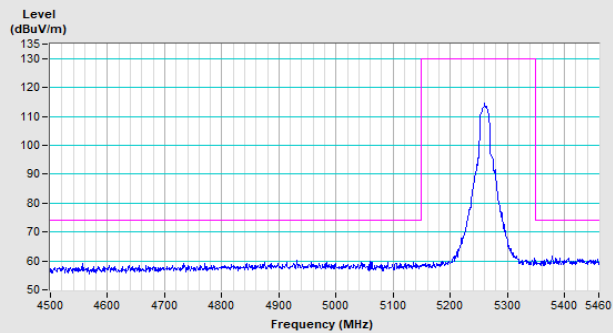


Horizontal (Peak)

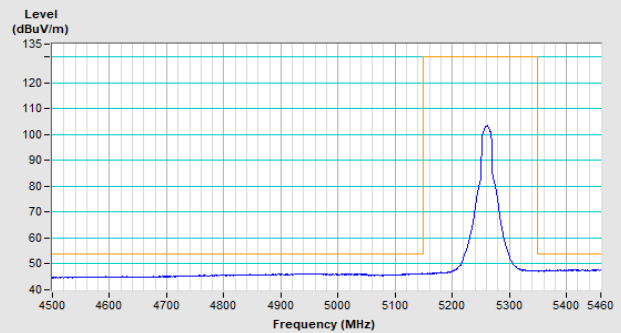

Horizontal (Average)

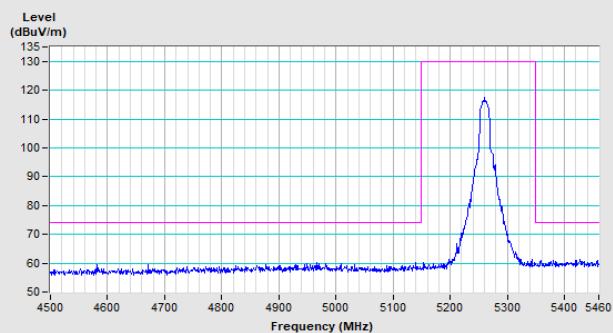


Vertical (Peak)

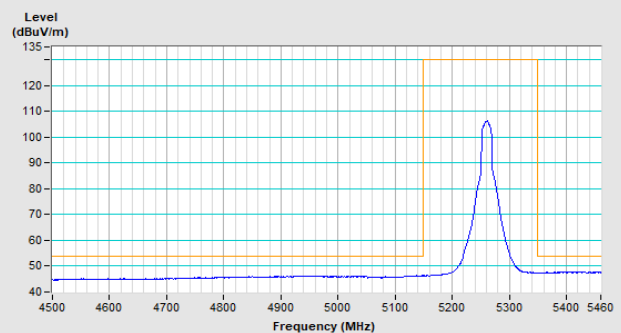


Vertical (Average)


802.11a Channel 64

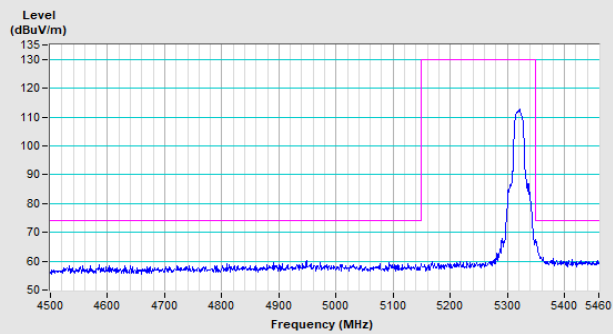


Horizontal (Peak)

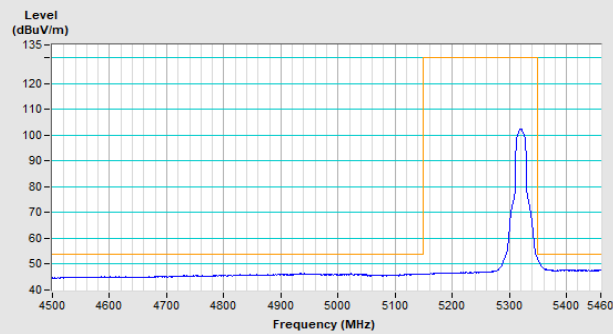

Horizontal (Average)

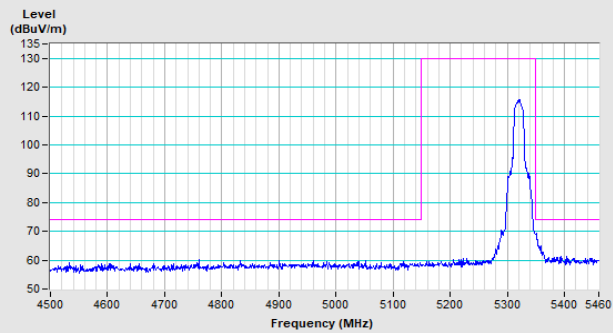


Vertical (Peak)

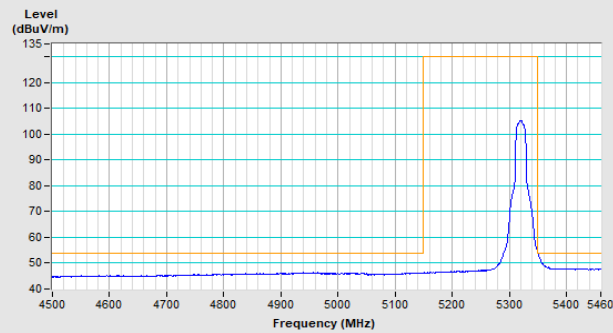


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

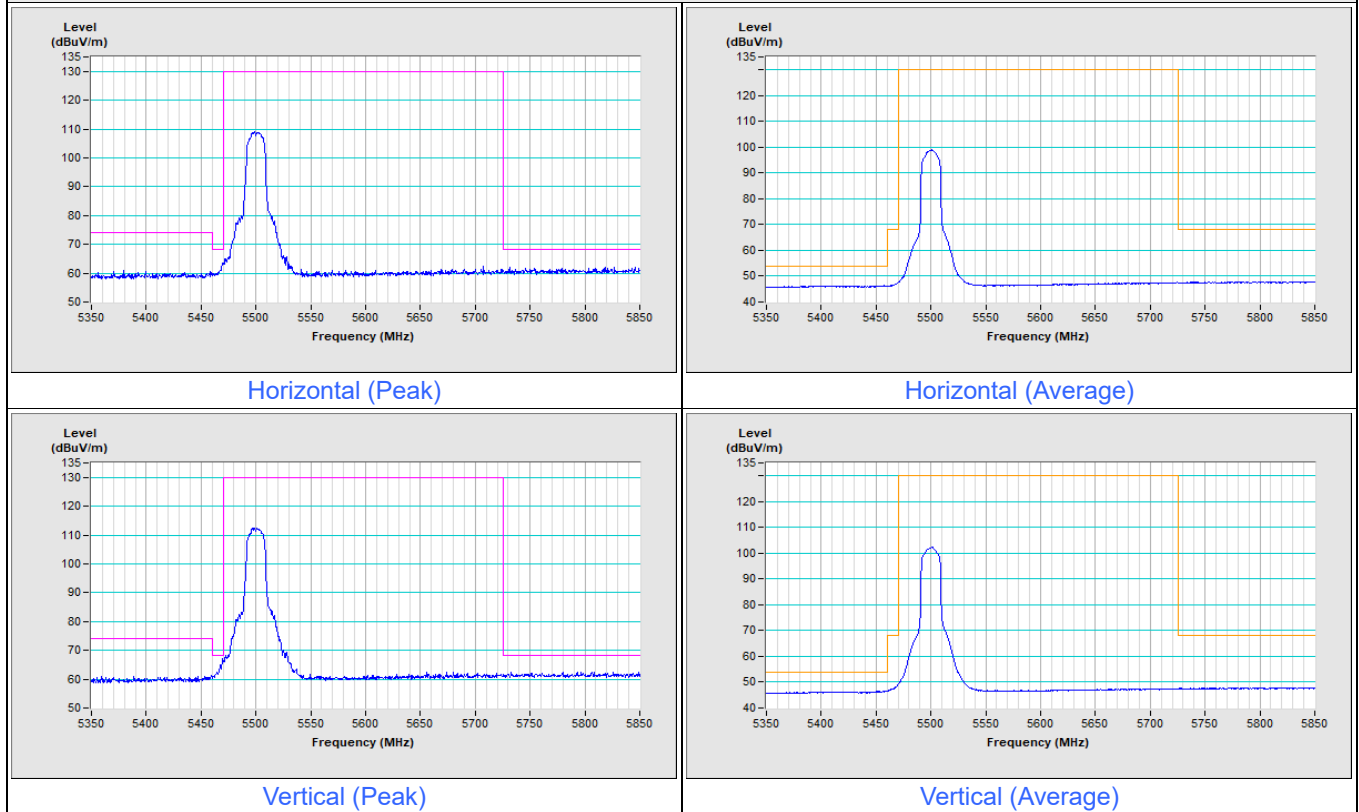

802.11a Channel 140

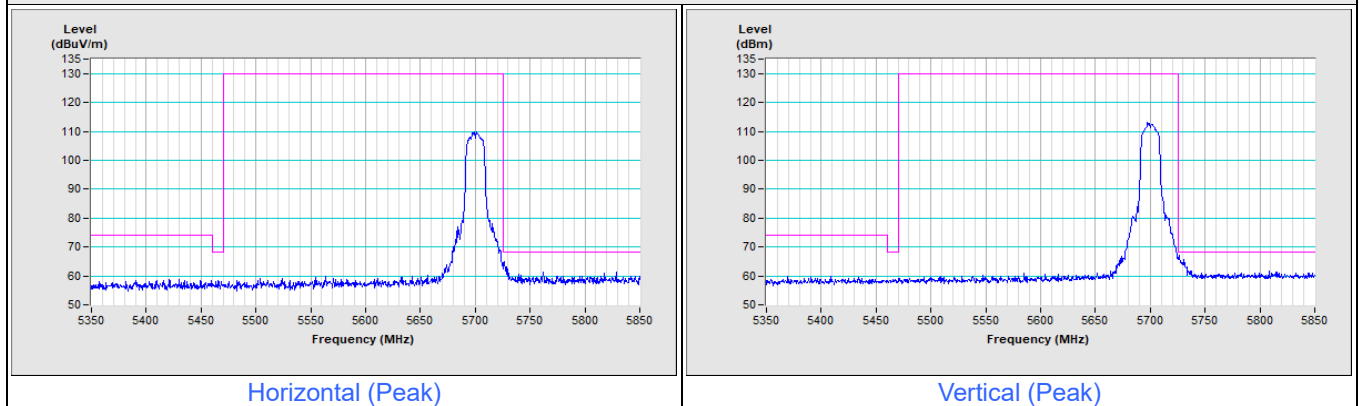


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

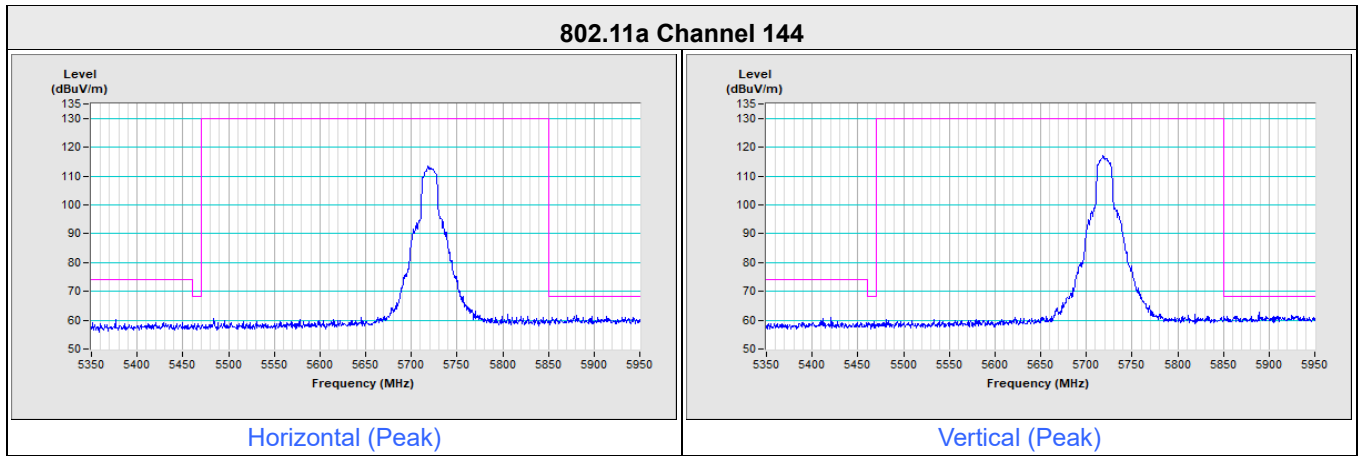


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11a Channel 149

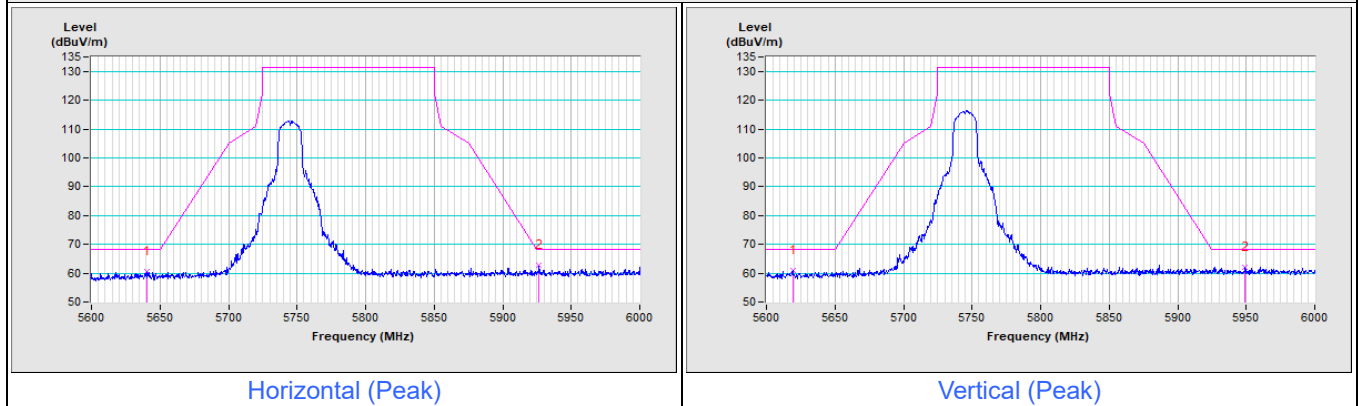

802.11a Channel 157

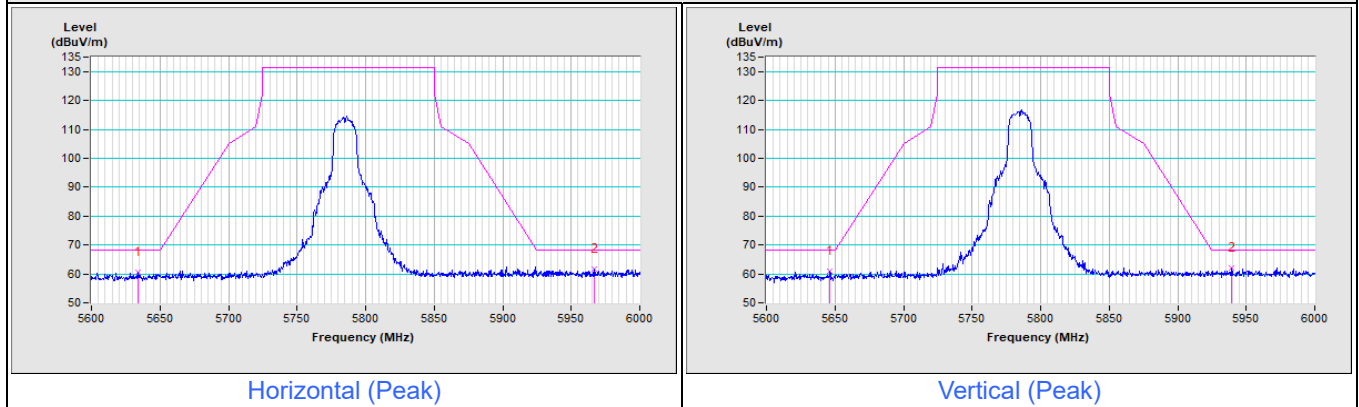


802.11a Channel 165

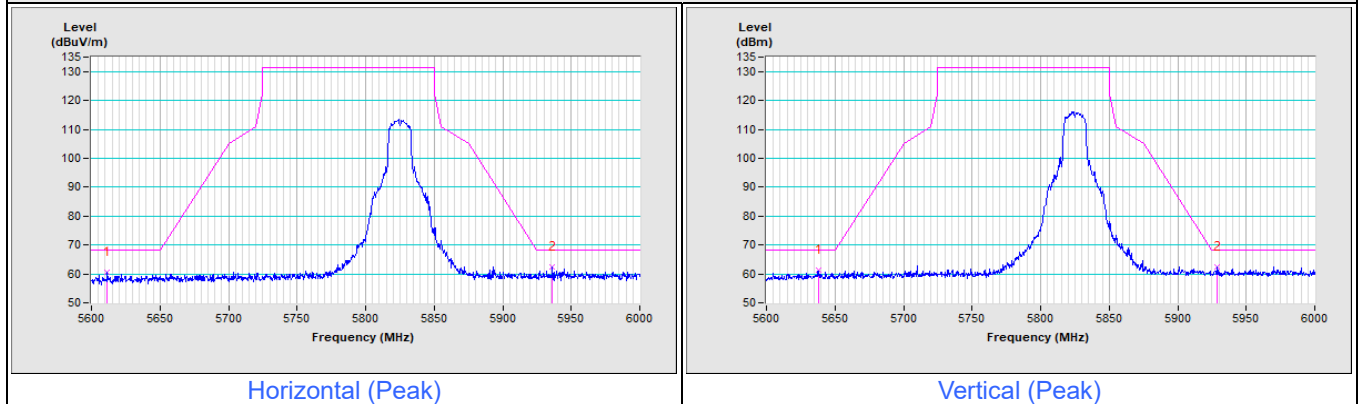


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 36

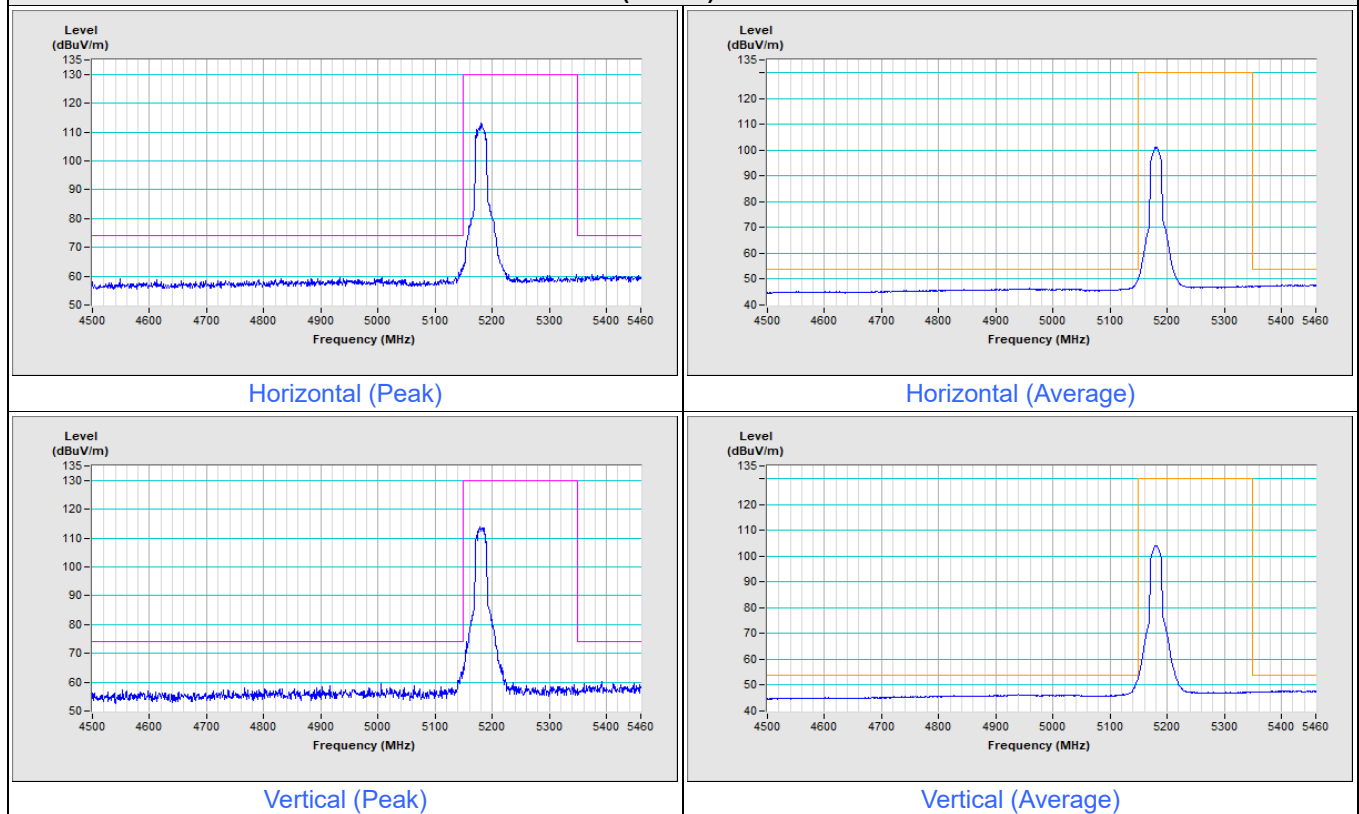


802.11be (EHT20) Channel 48

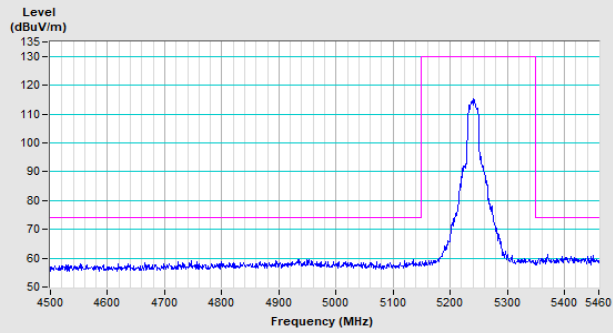


Horizontal (Peak)

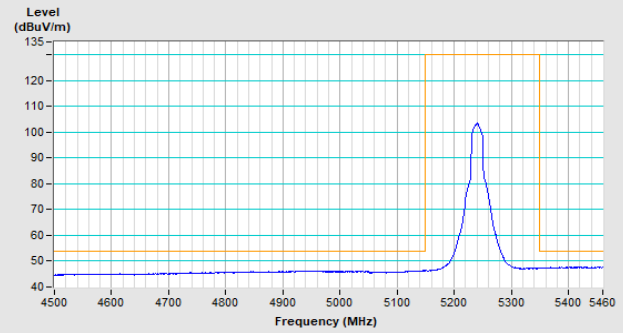

Horizontal (Average)

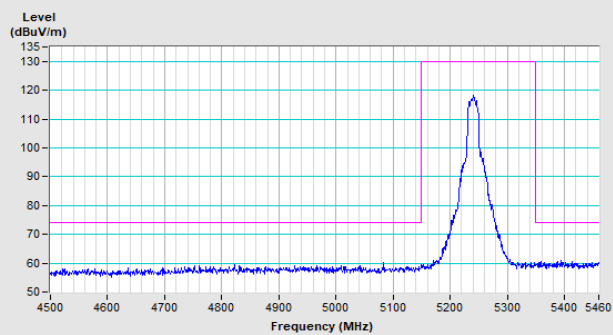


Vertical (Peak)

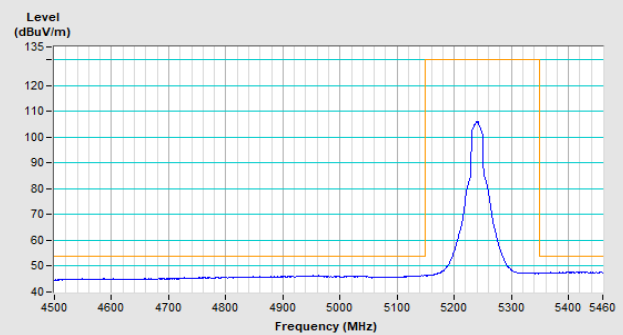


Vertical (Average)


802.11be (EHT20) Channel 52

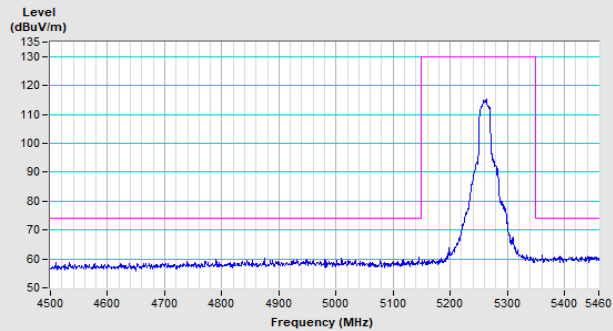


Horizontal (Peak)

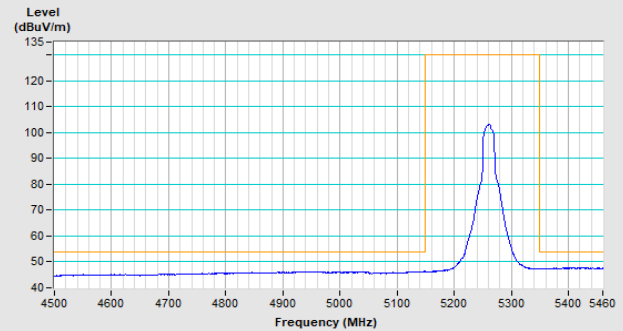

Horizontal (Average)

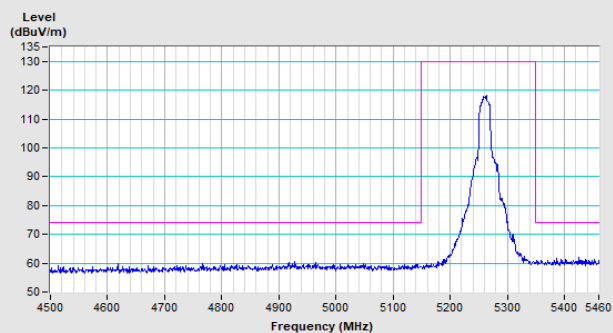


Vertical (Peak)

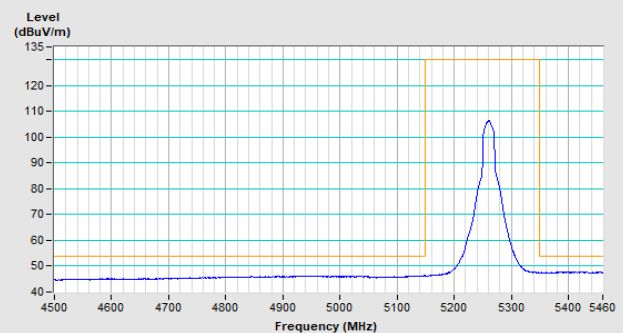


Vertical (Average)


802.11be (EHT20) Channel 64

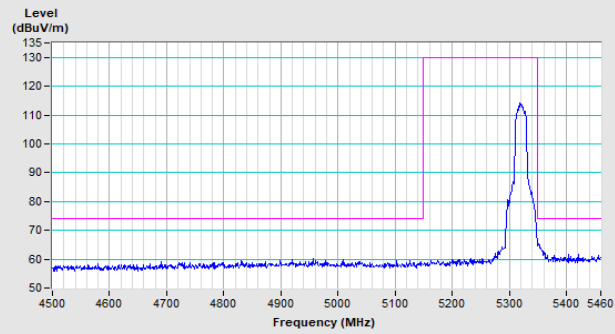


Horizontal (Peak)

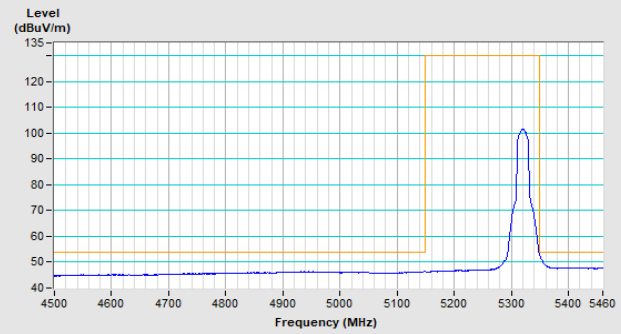

Horizontal (Average)

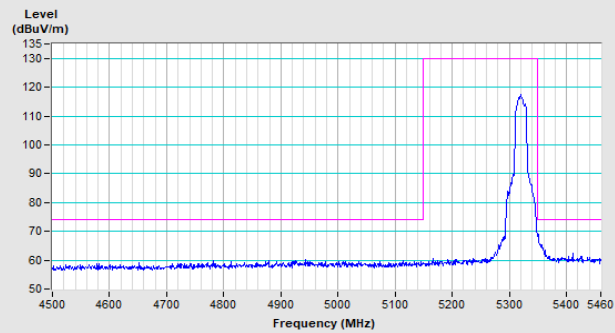


Vertical (Peak)

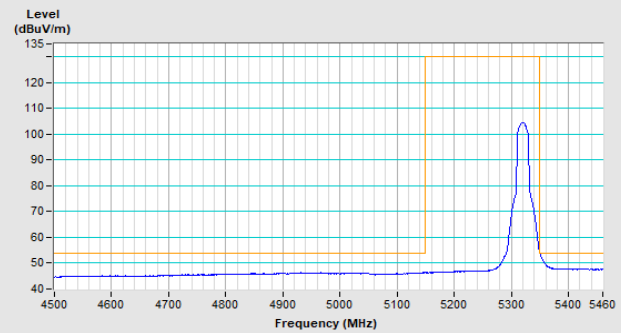


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

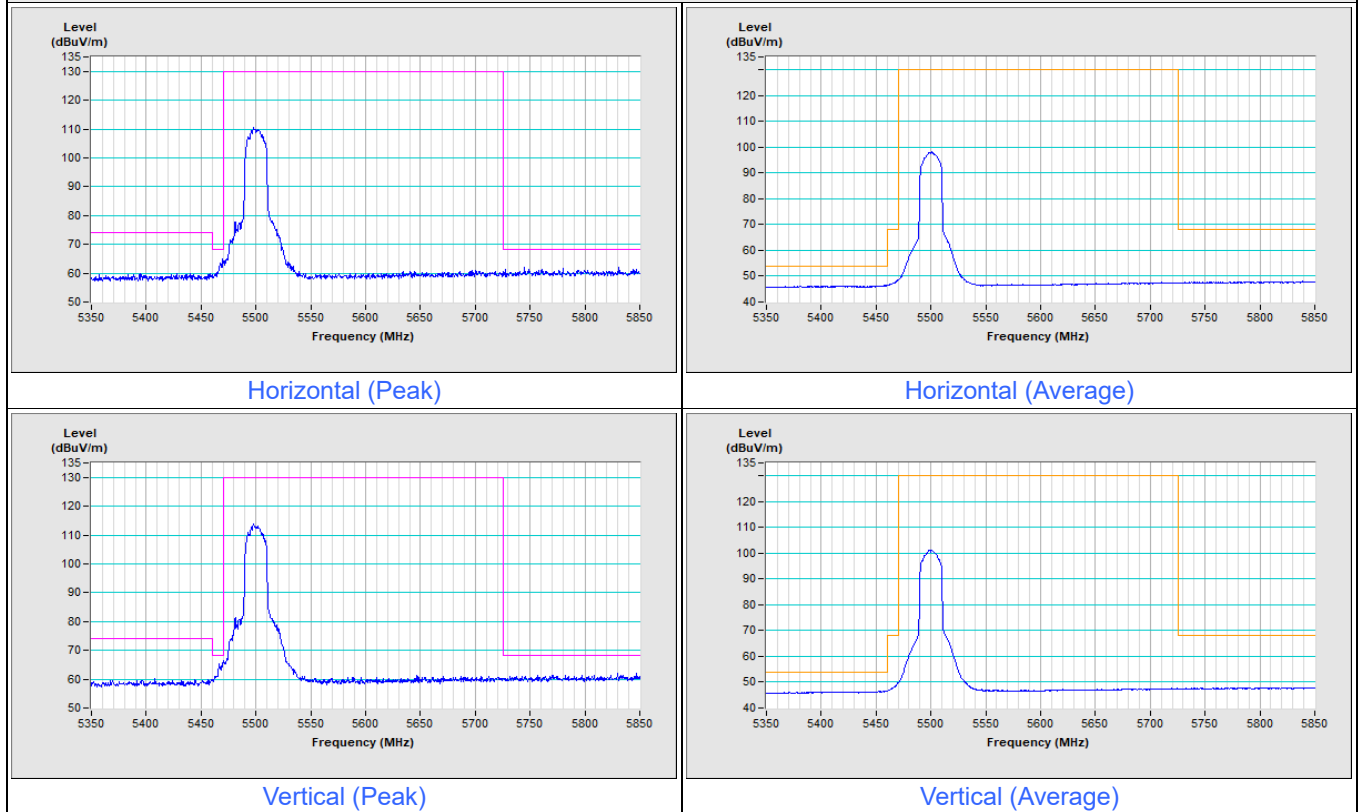

802.11be (EHT20) Channel 140

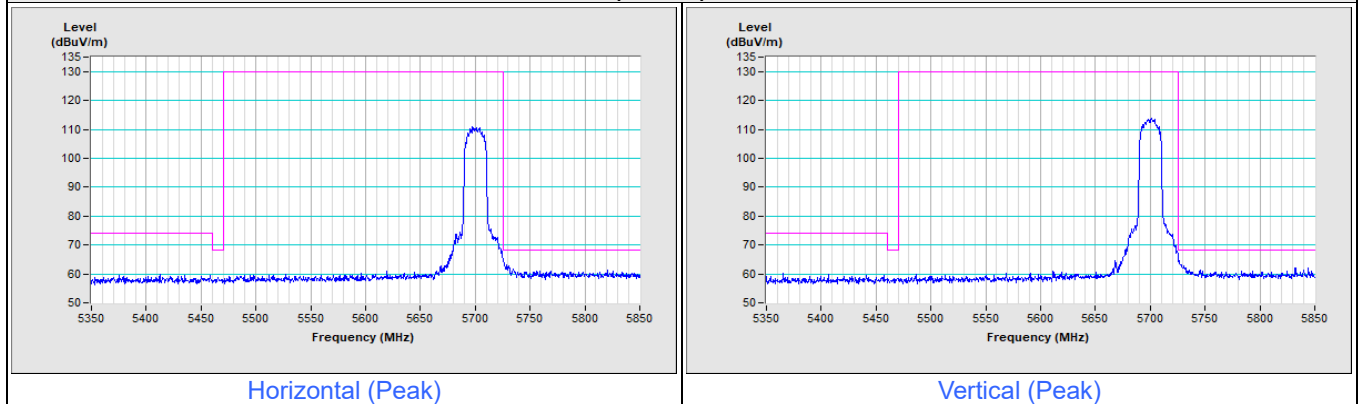


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

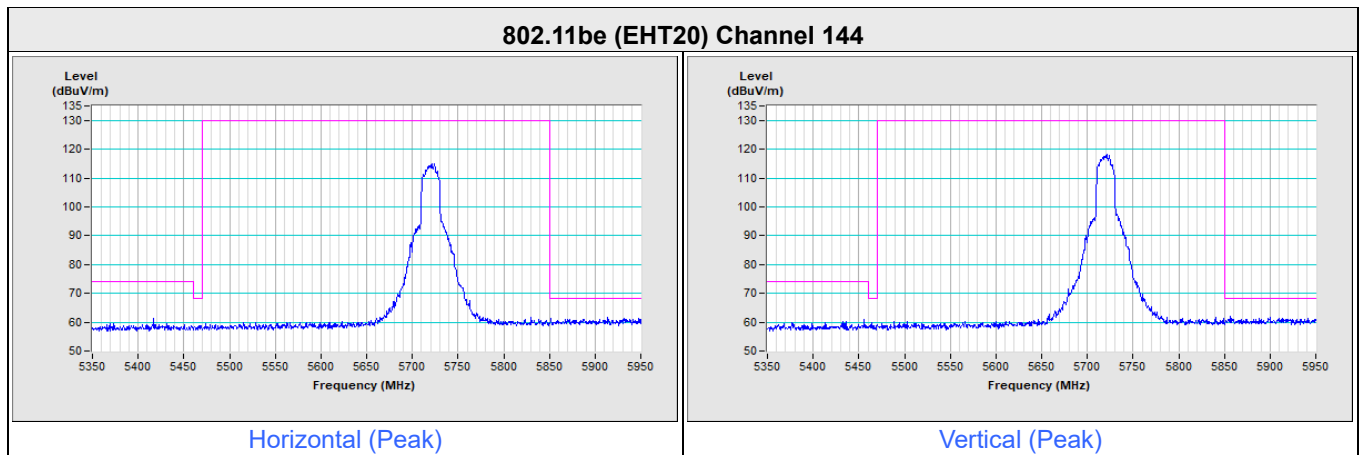


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 149

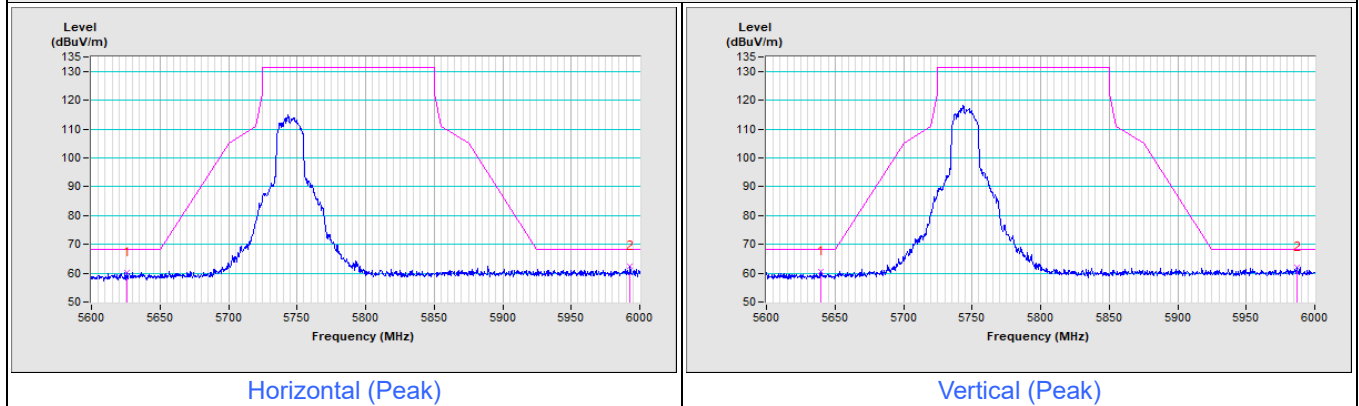

802.11be (EHT20) Channel 157

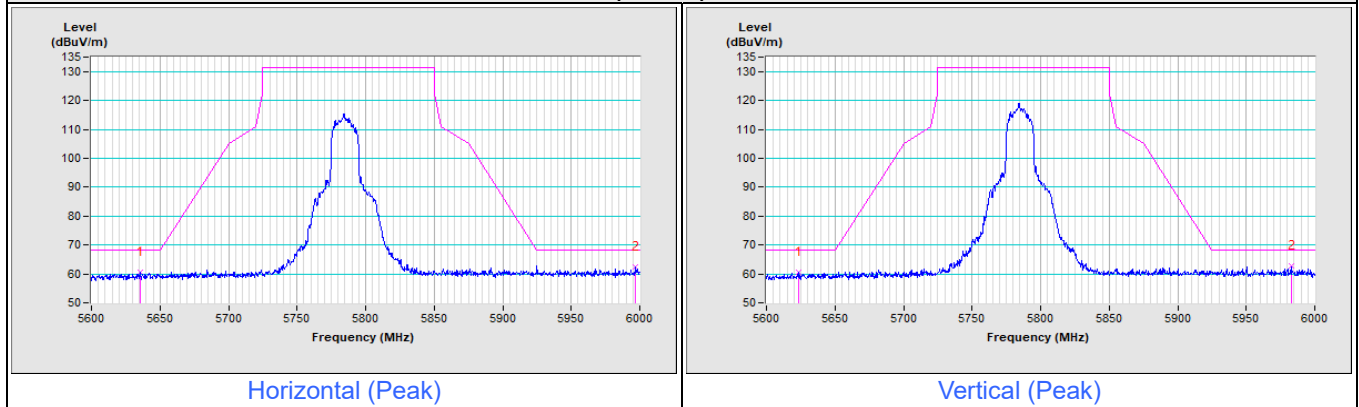


802.11be (EHT20) Channel 165

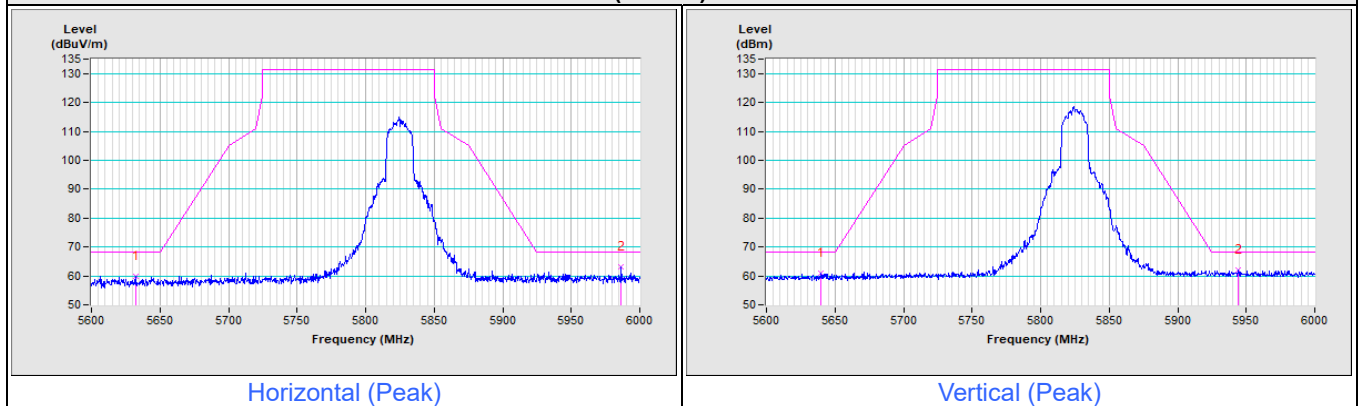


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 38

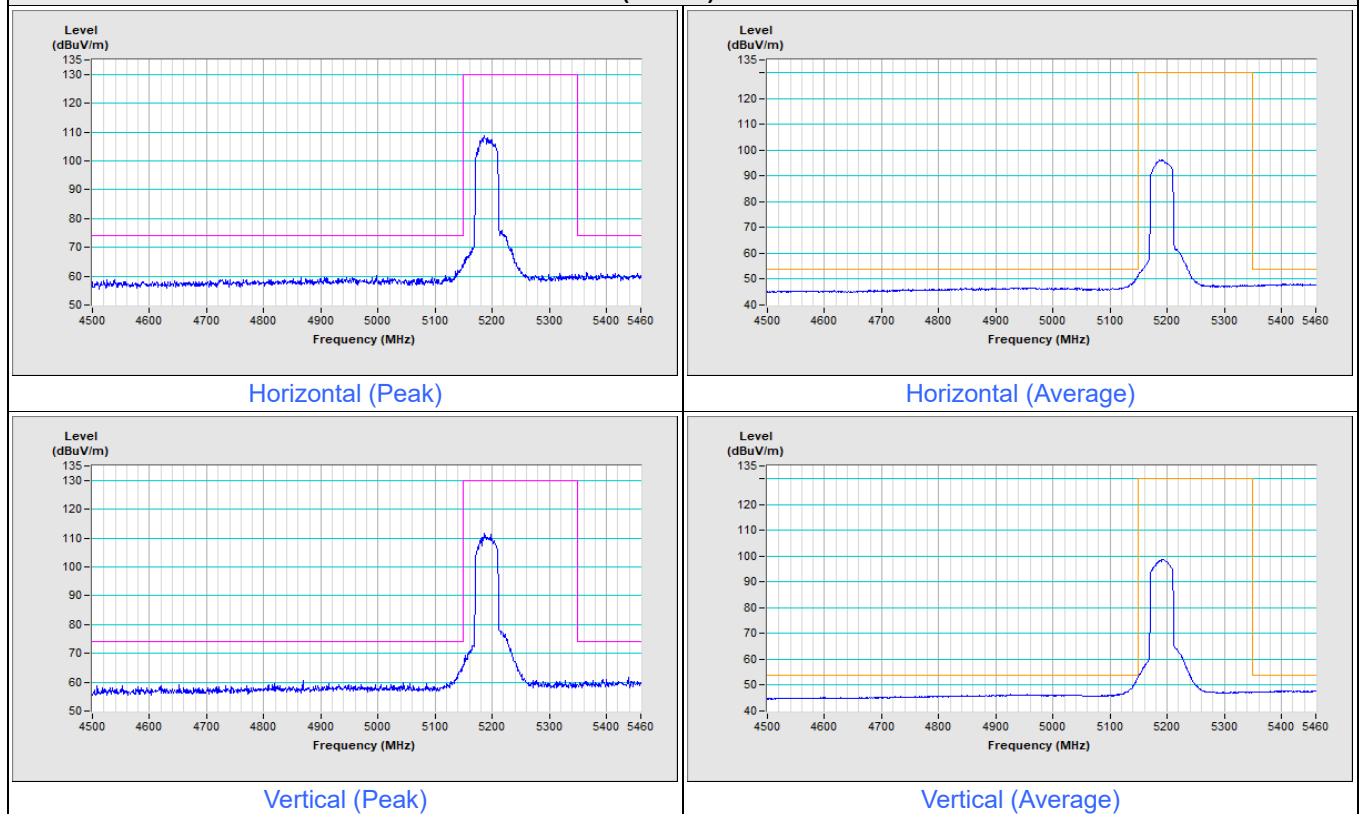


802.11be (EHT40) Channel 46

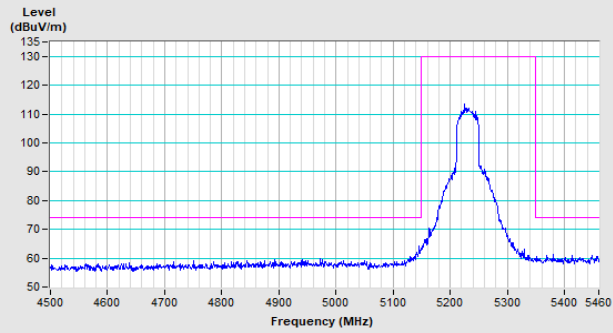


Horizontal (Peak)

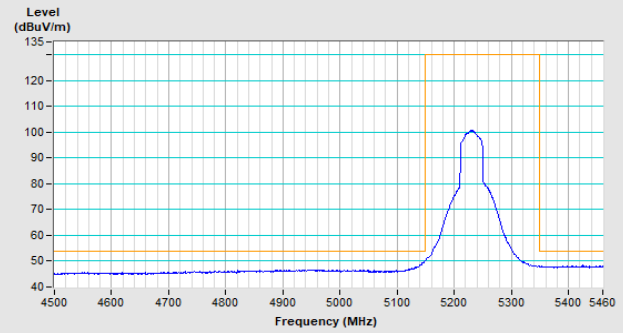

Horizontal (Average)

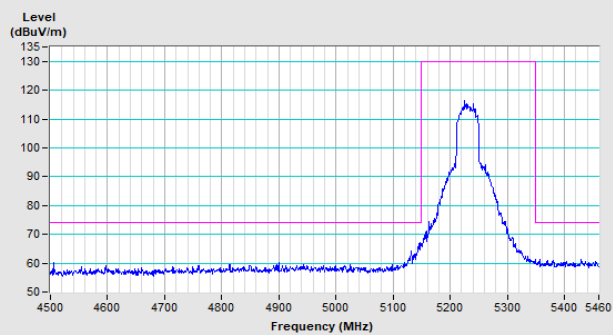


Vertical (Peak)

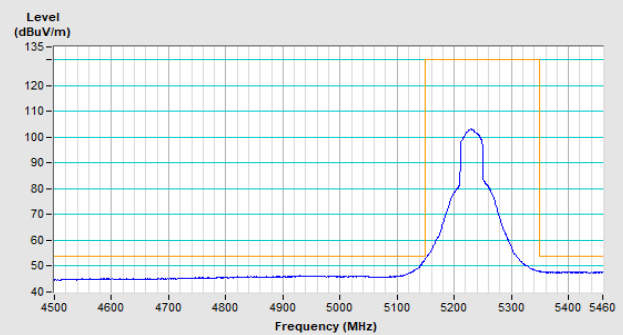


Vertical (Average)


802.11be (EHT40) Channel 54

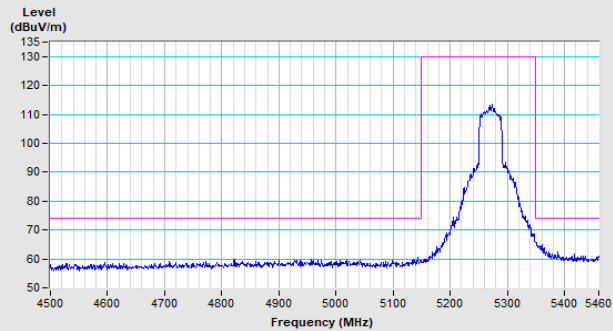


Horizontal (Peak)

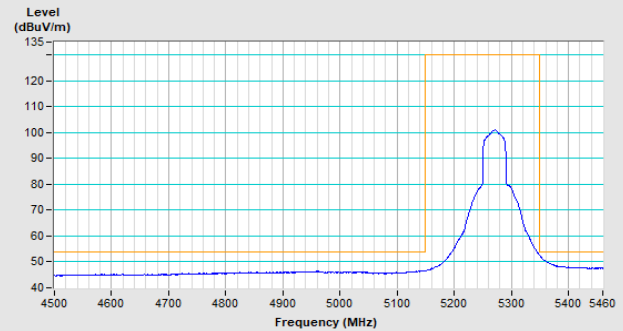

Horizontal (Average)

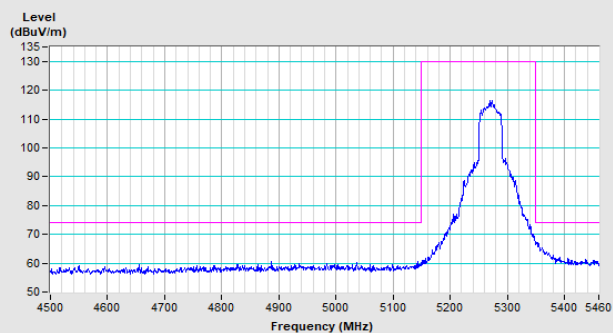


Vertical (Peak)

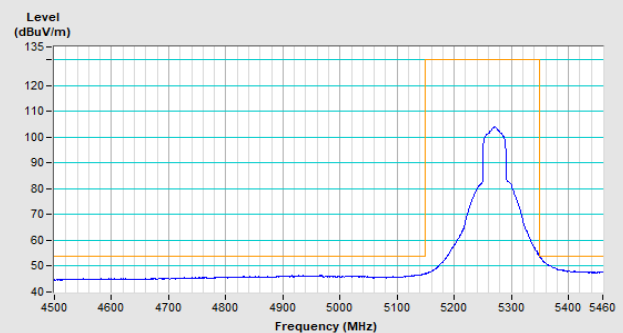


Vertical (Average)


802.11be (EHT40) Channel 62

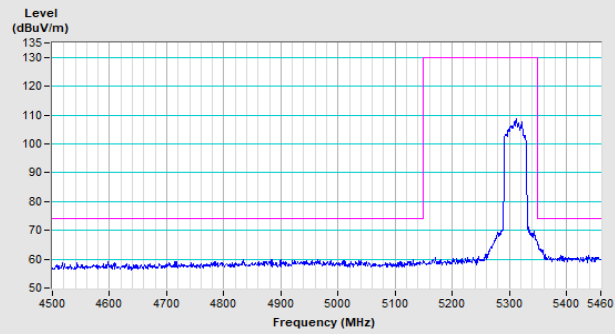


Horizontal (Peak)

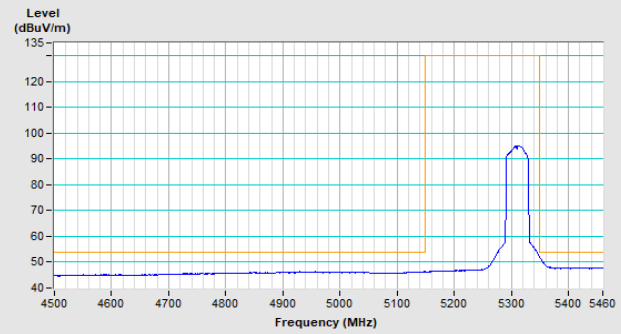

Horizontal (Average)

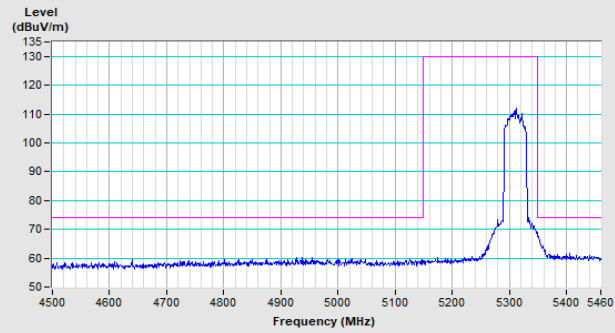


Vertical (Peak)

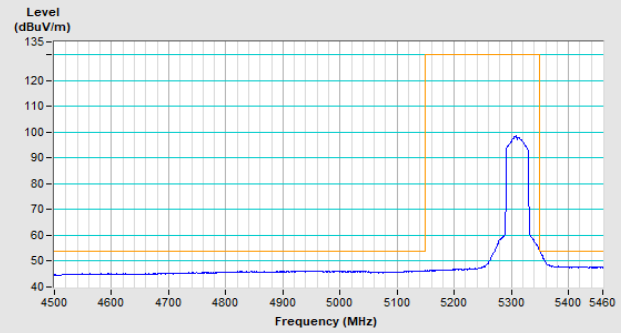


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 102

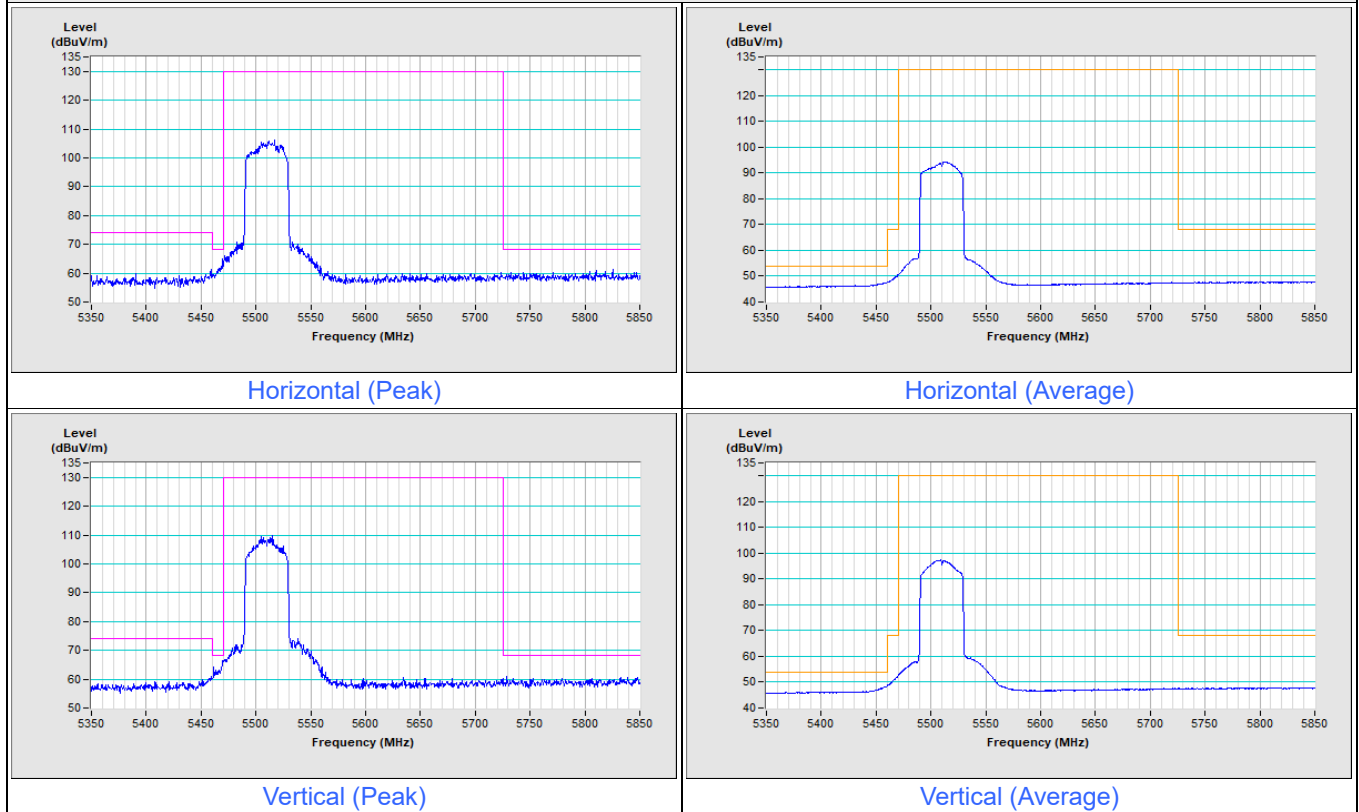



802.11be (EHT40) Channel 134

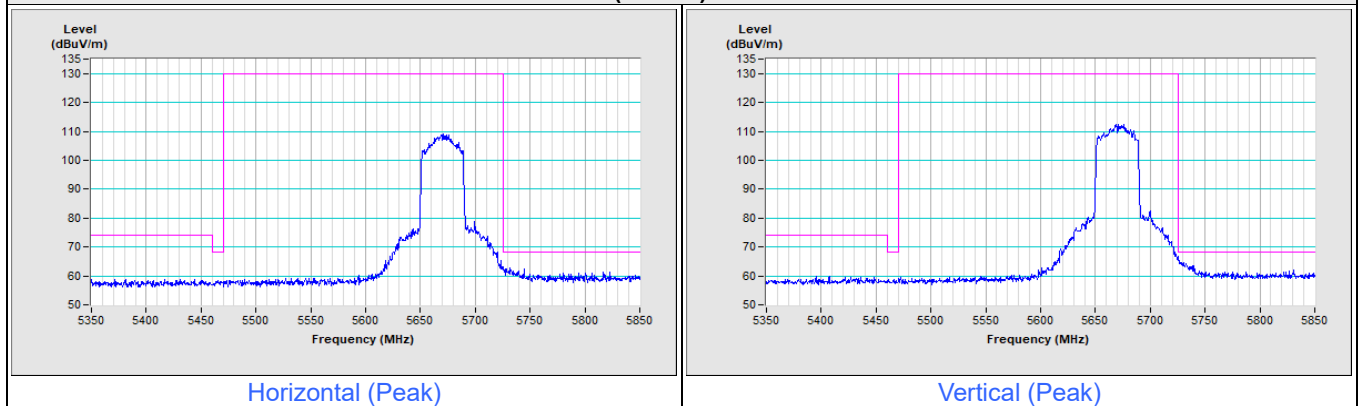

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

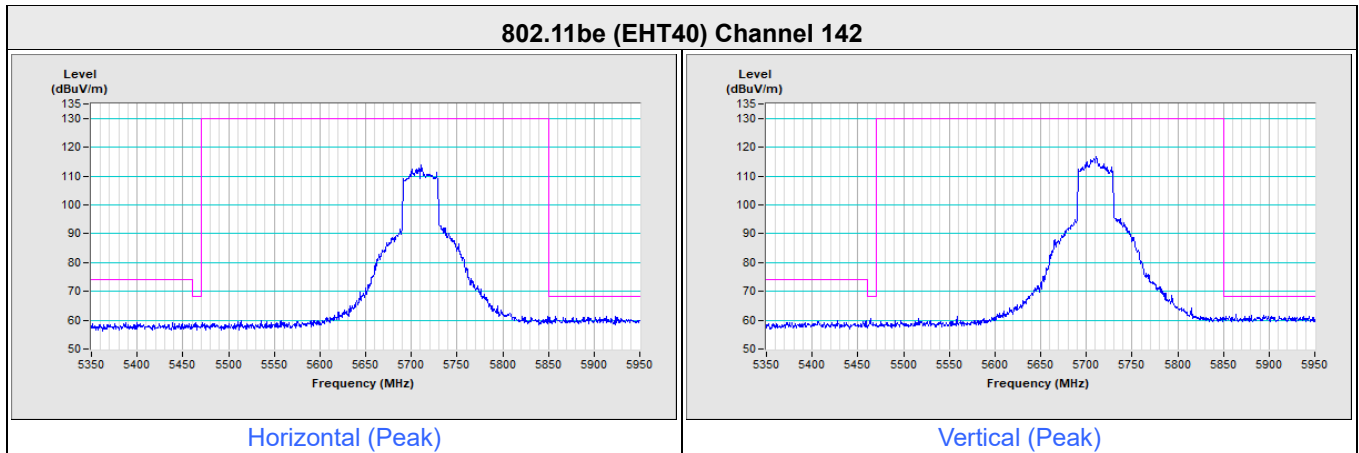


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

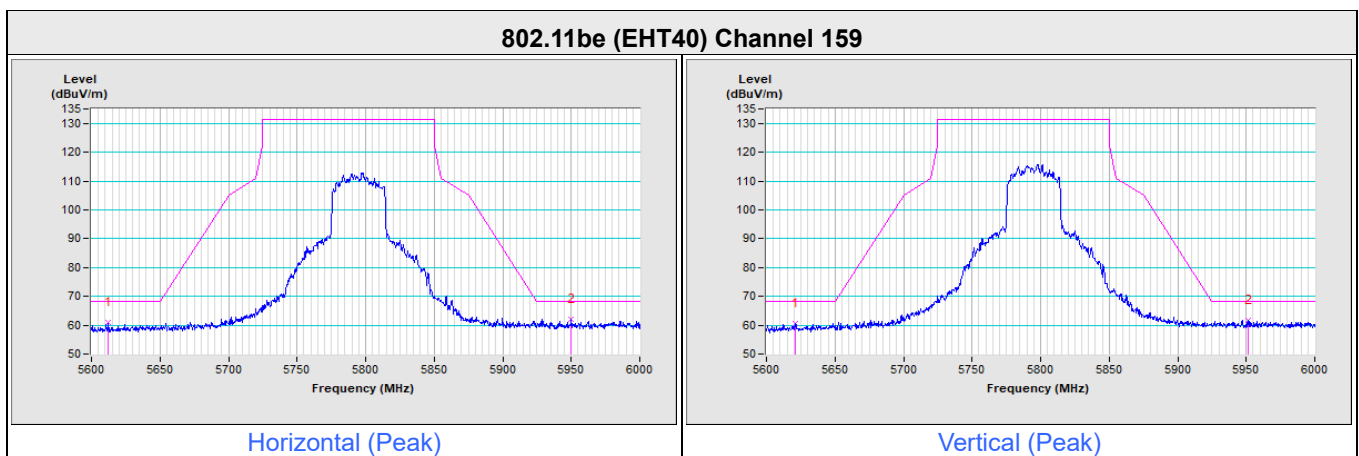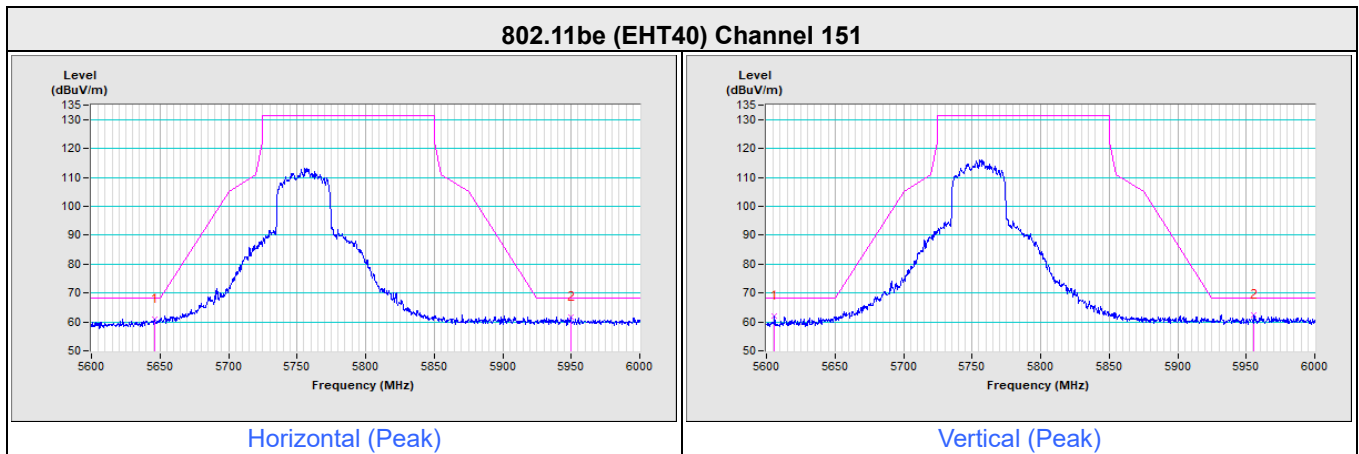


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

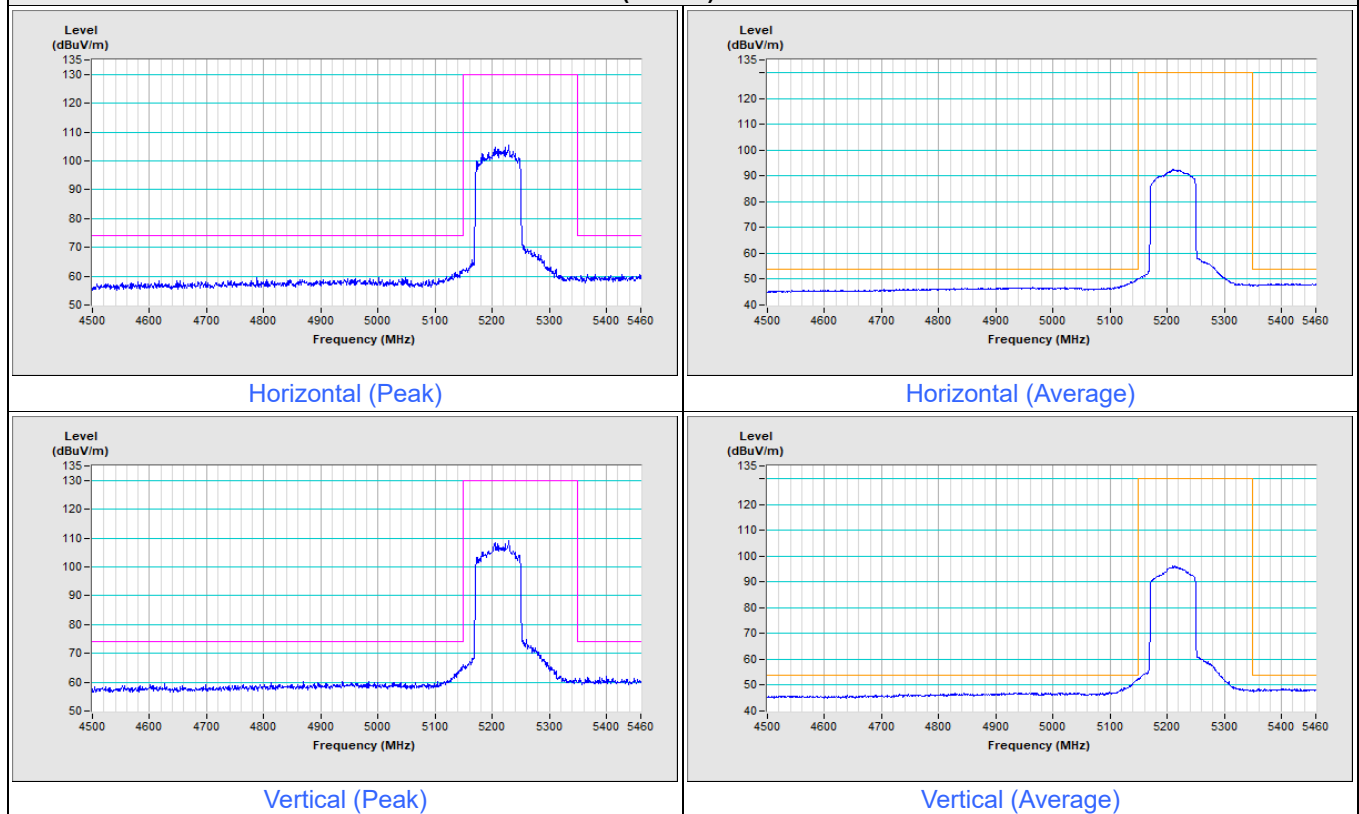


802.11be (EHT80) Channel 58

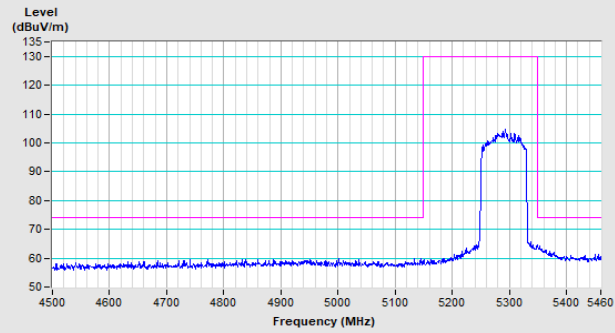


Horizontal (Peak)

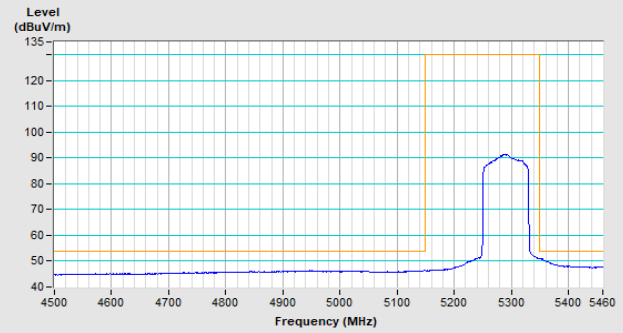

Horizontal (Average)

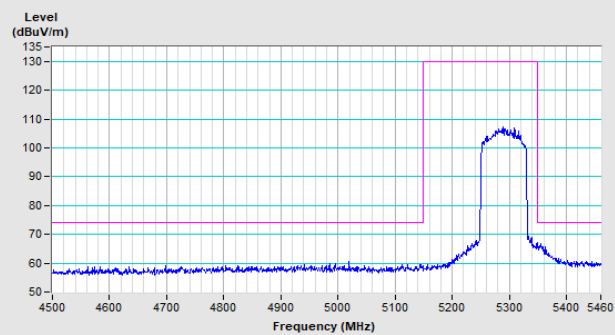


Vertical (Peak)

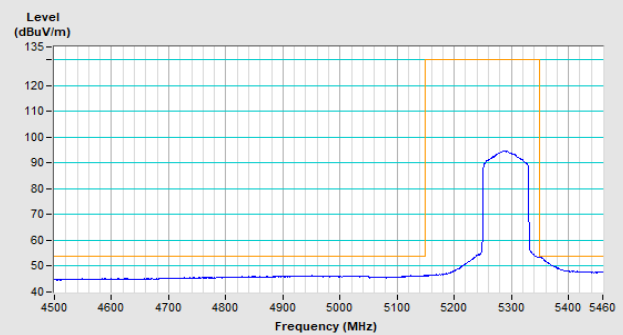


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

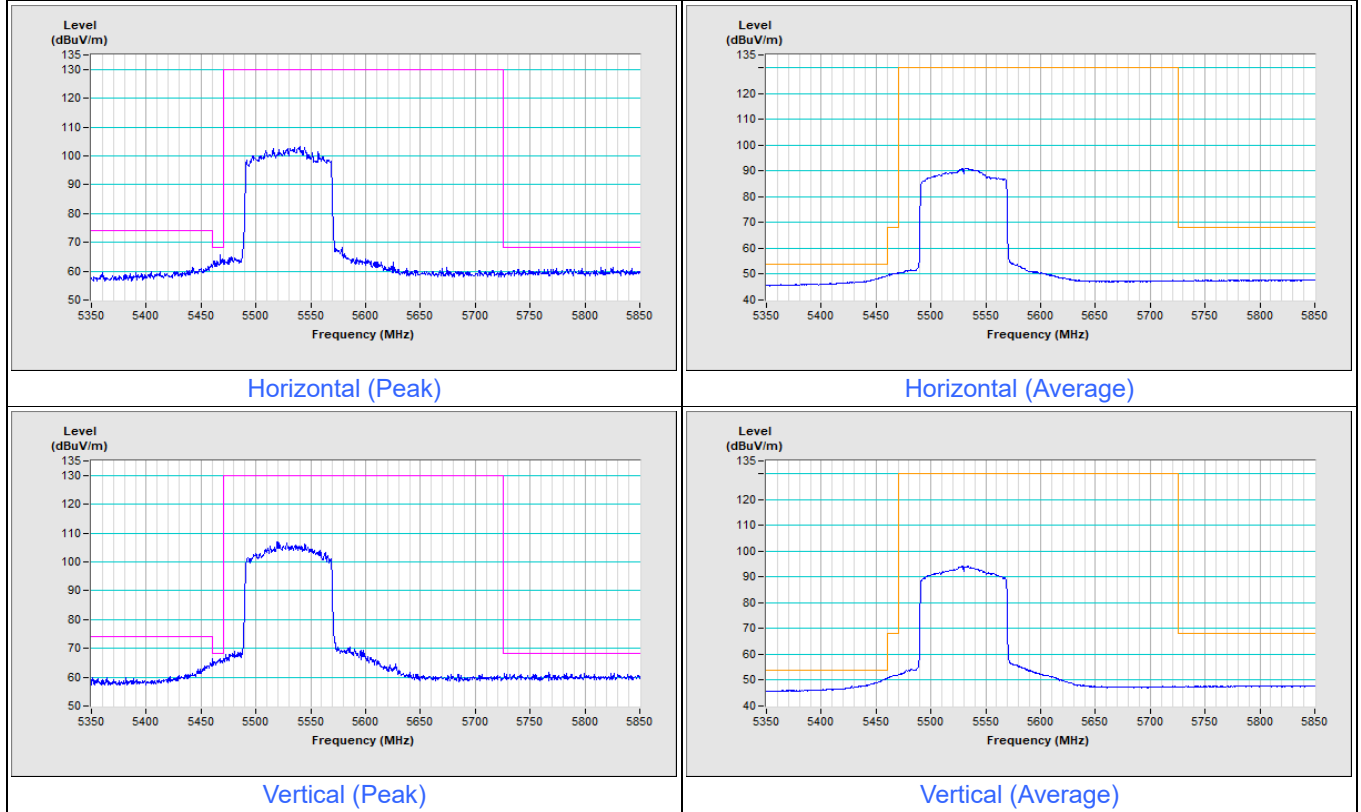


802.11be (EHT80) Channel 122

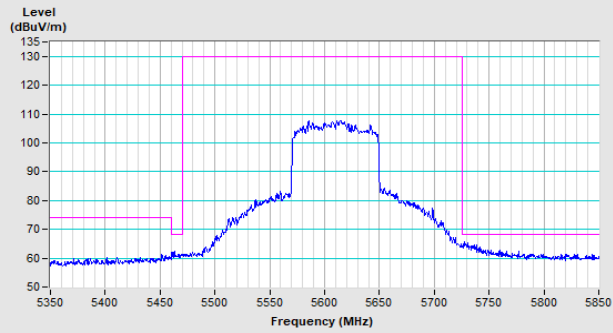


Horizontal (Peak)

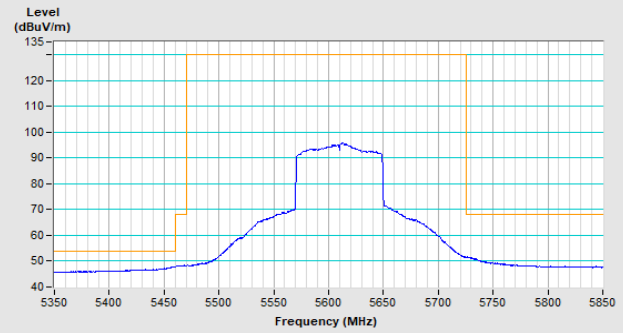

Horizontal (Average)

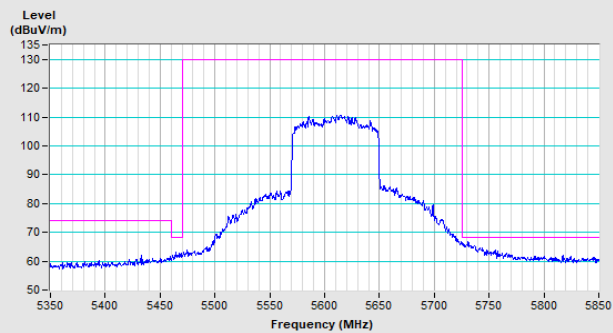


Vertical (Peak)

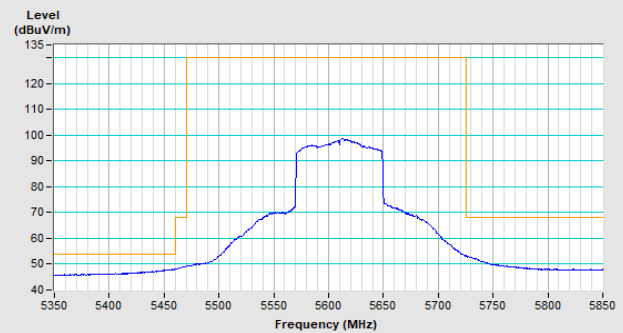


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

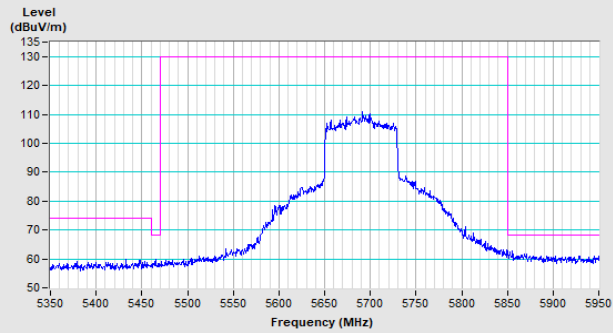


Horizontal (Peak)

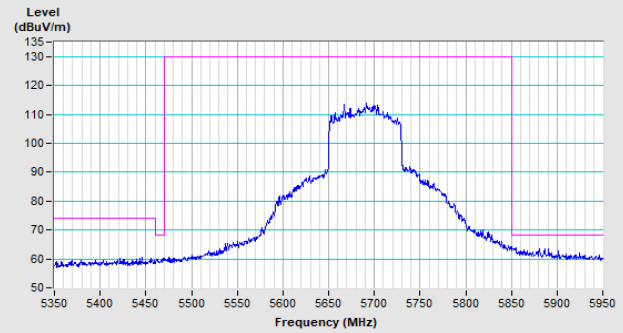

Vertical (Peak)


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 155

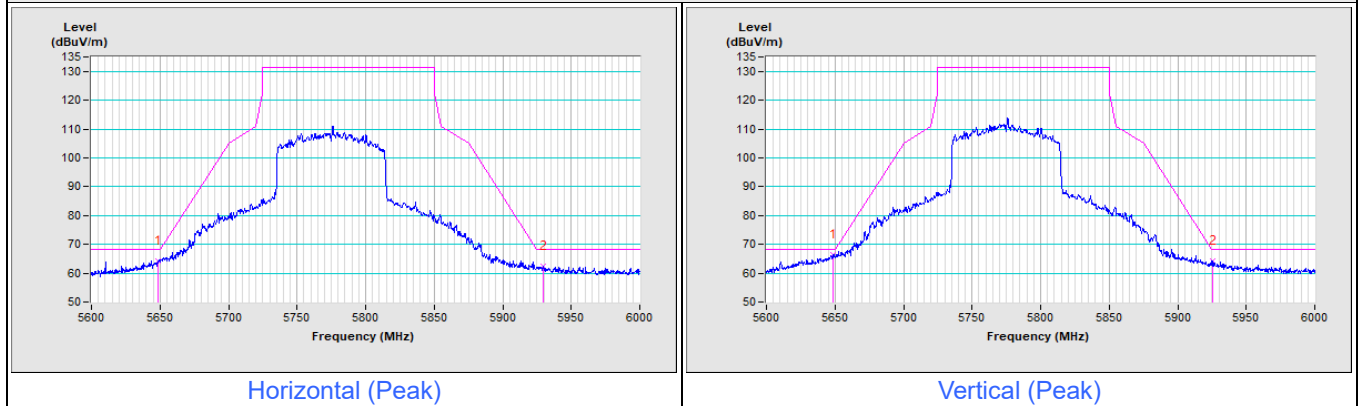


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

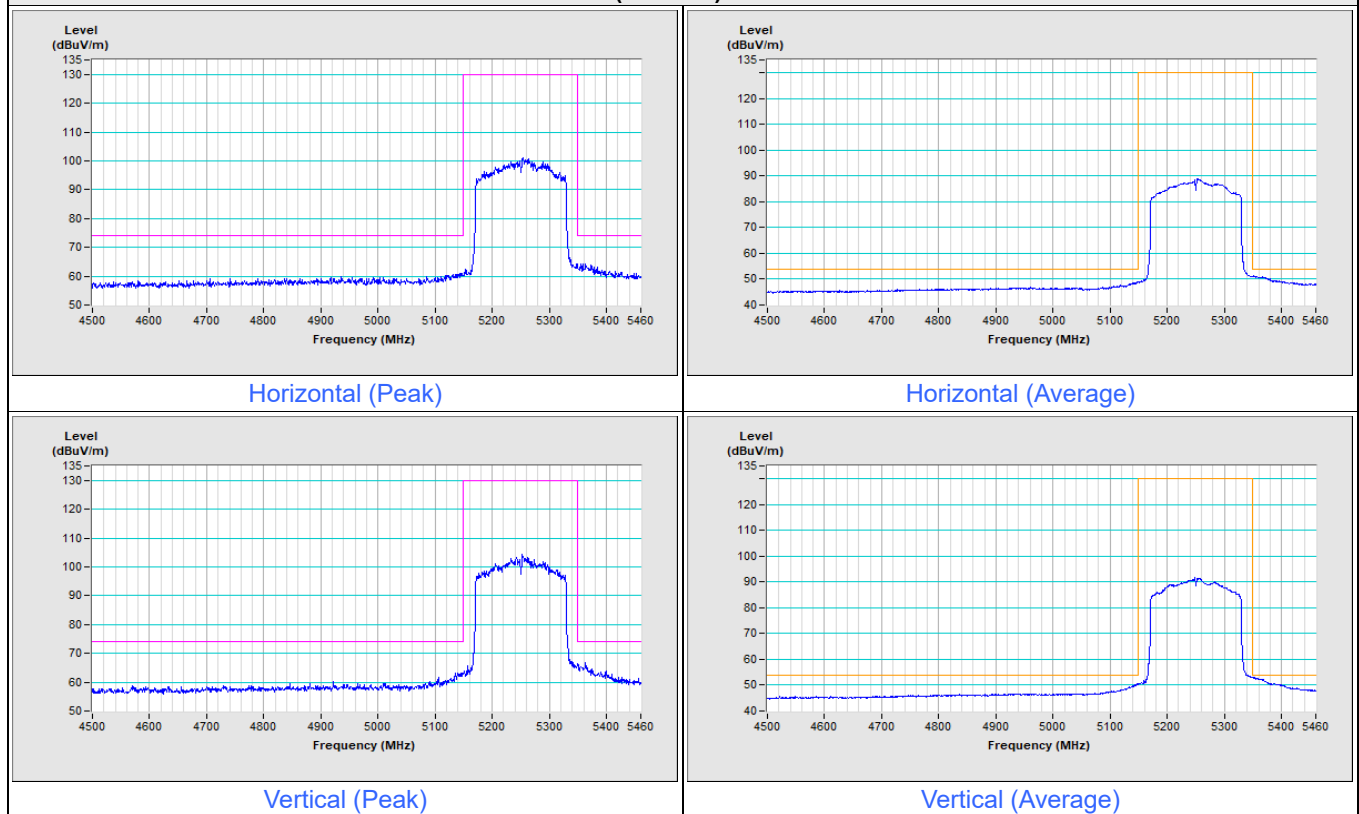


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

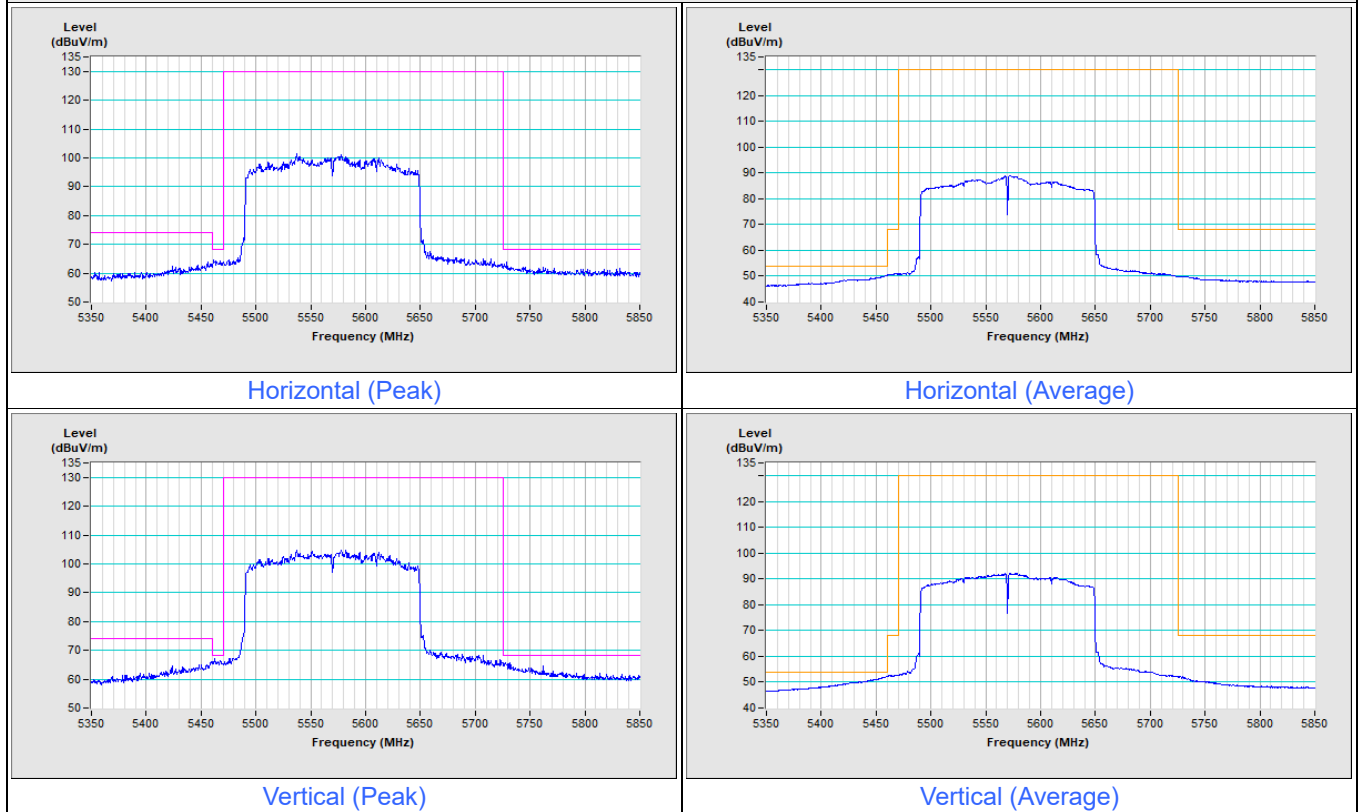


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 36

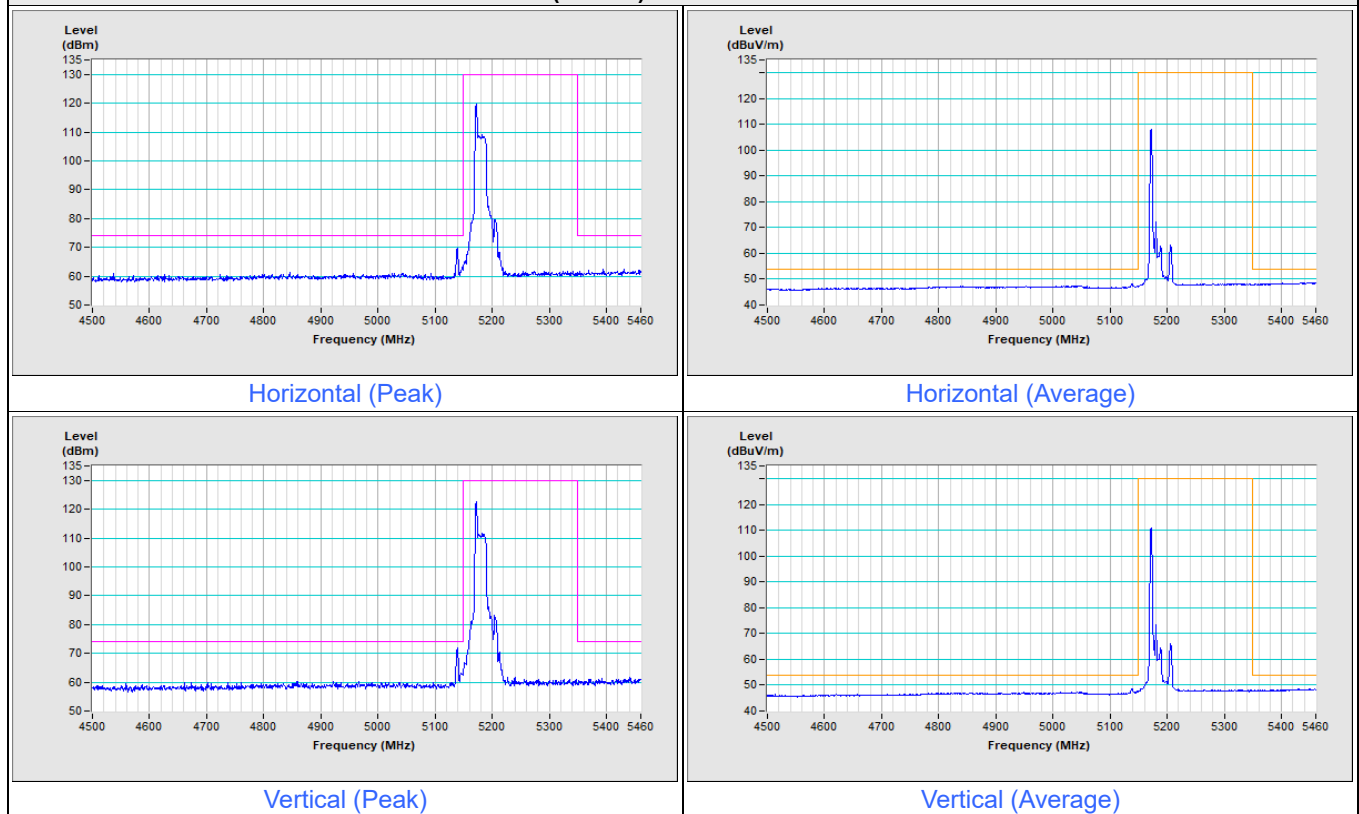


802.11be (EHT20) 26-tone RU Channel 48

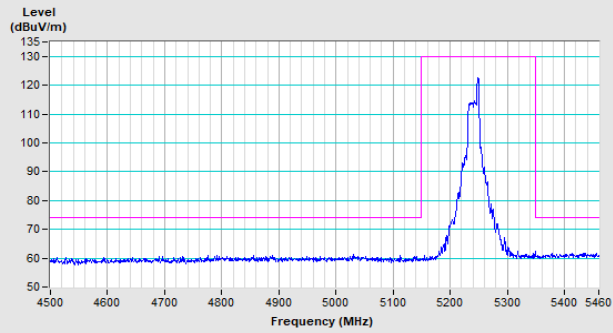


Horizontal (Peak)

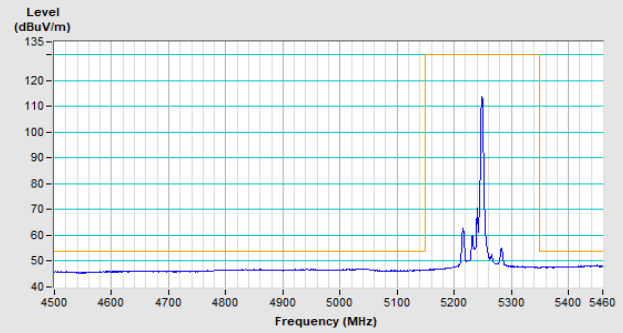

Horizontal (Average)

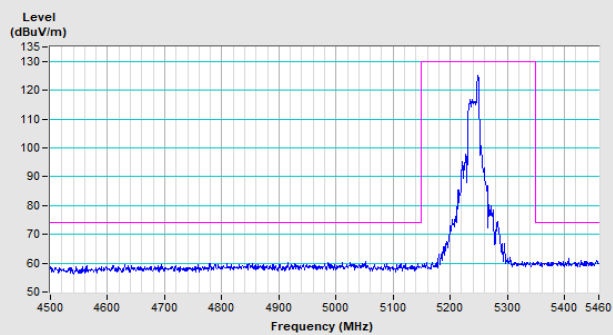


Vertical (Peak)

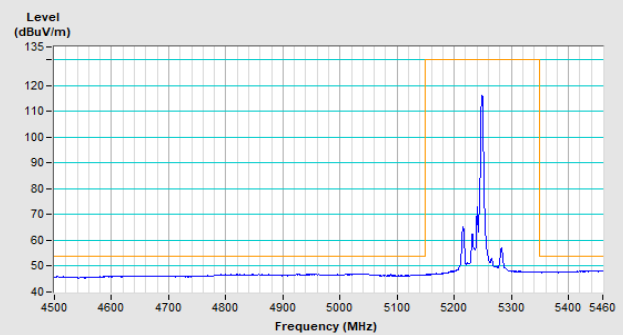


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 52

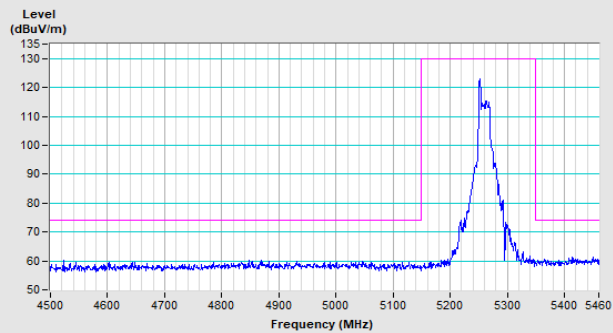


Horizontal (Peak)

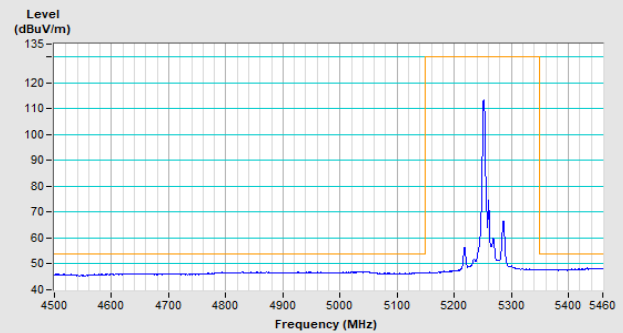

Horizontal (Average)

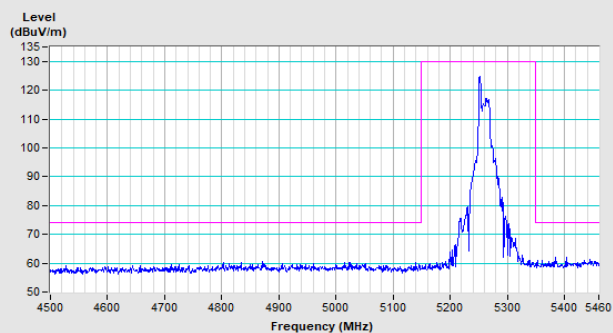


Vertical (Peak)

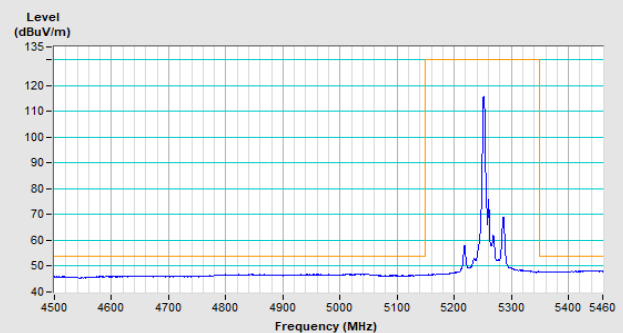


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 64

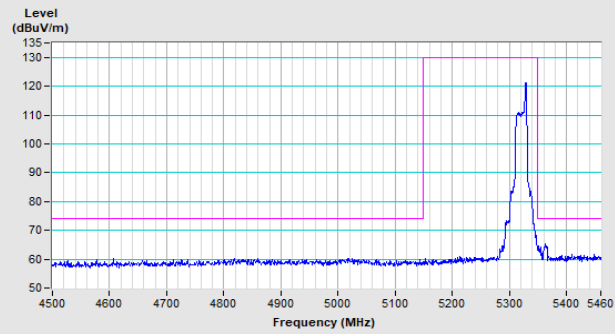


Horizontal (Peak)

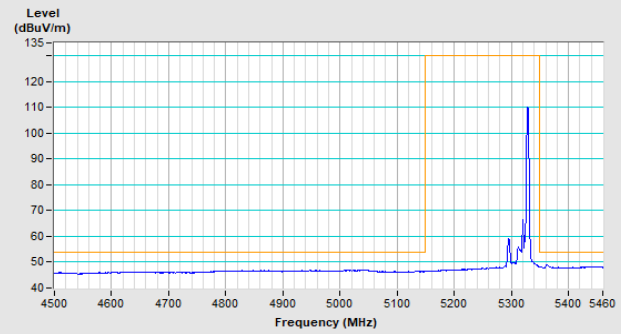

Horizontal (Average)

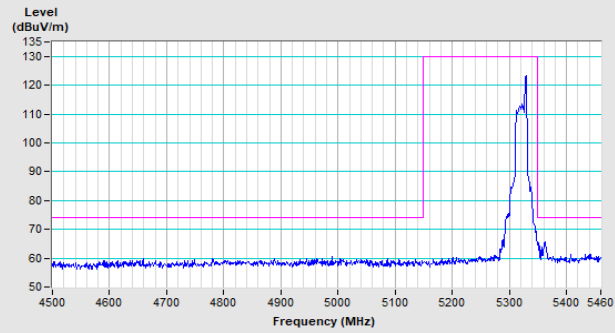


Vertical (Peak)

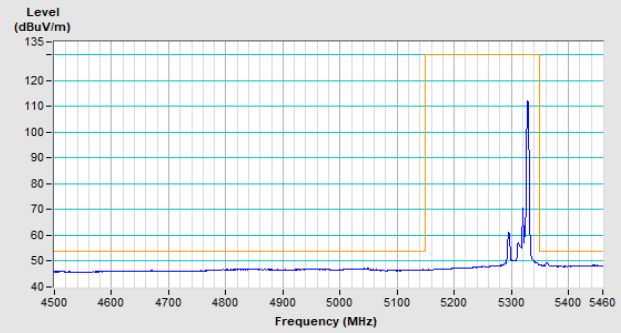


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 100

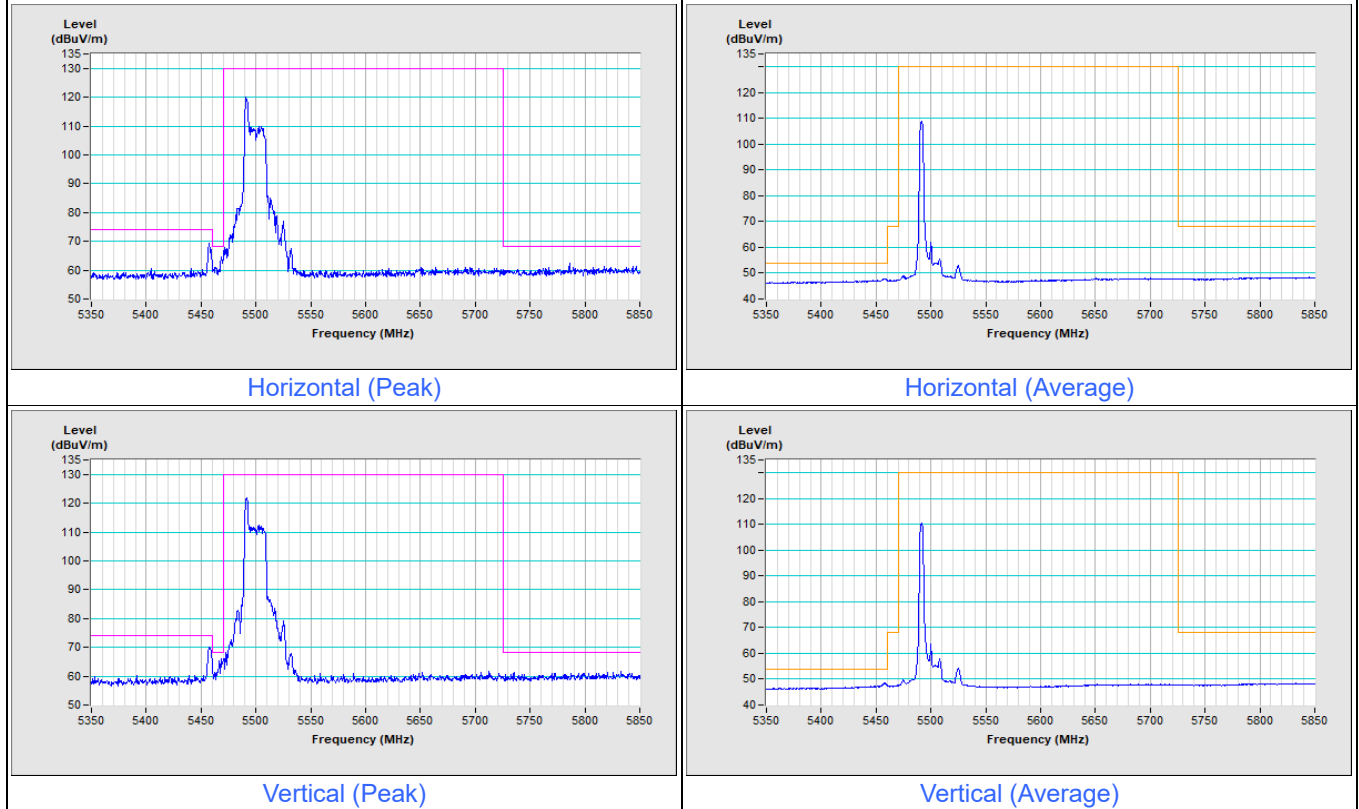


802.11be (EHT20) 26-tone RU Channel 140

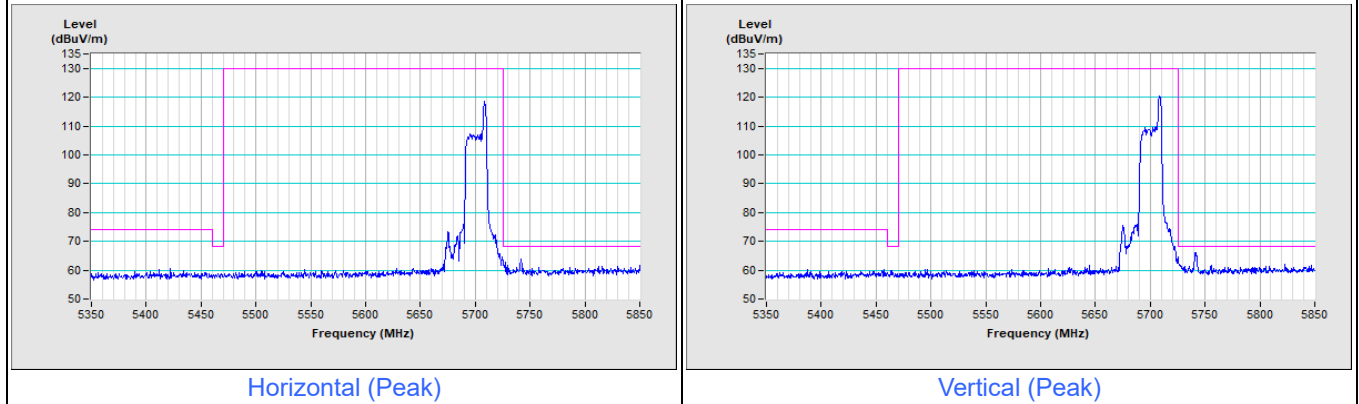


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) 26-tone RU Channel 144

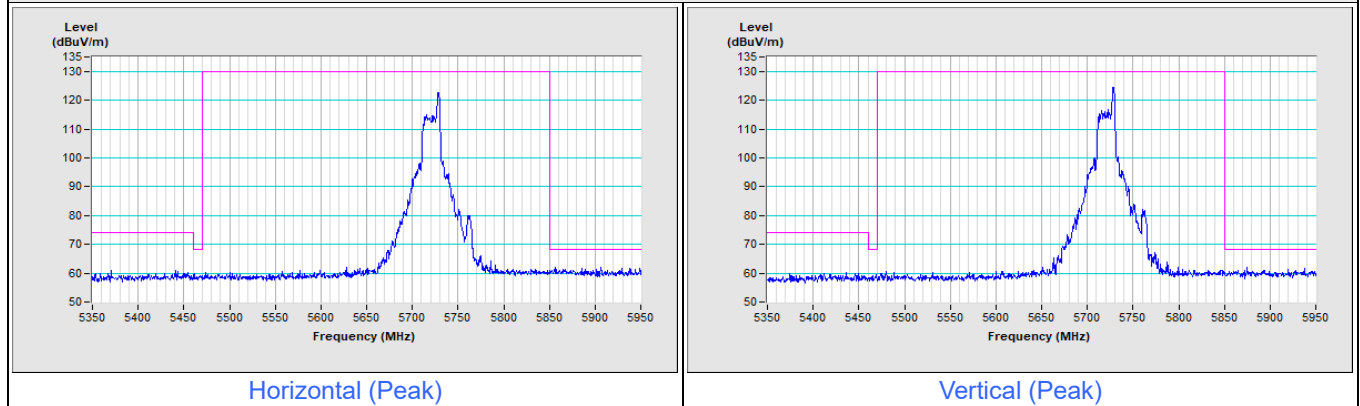


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 26-tone RU Channel 149

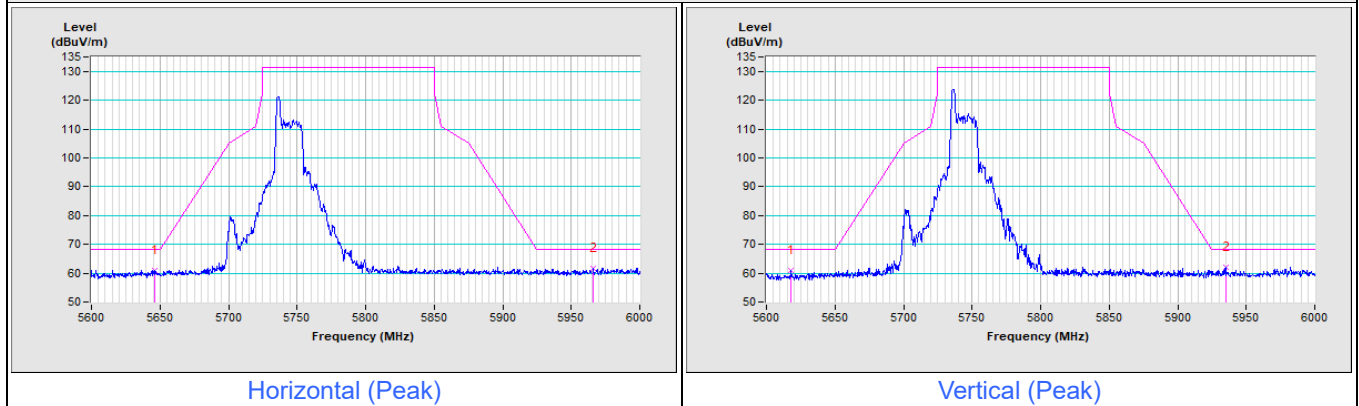

802.11be (EHT20) 26-tone RU Channel 157

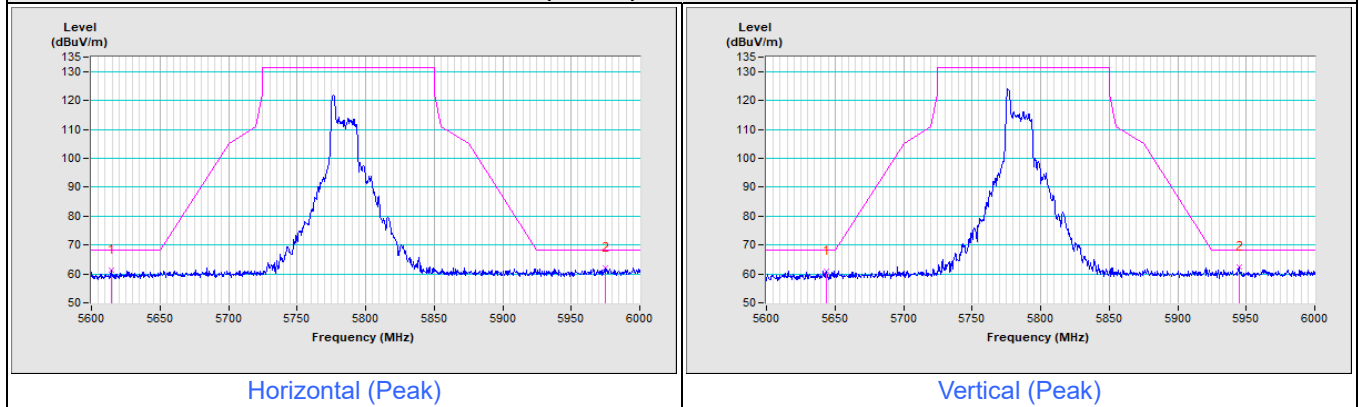


802.11be (EHT20) 26-tone RU Channel 165

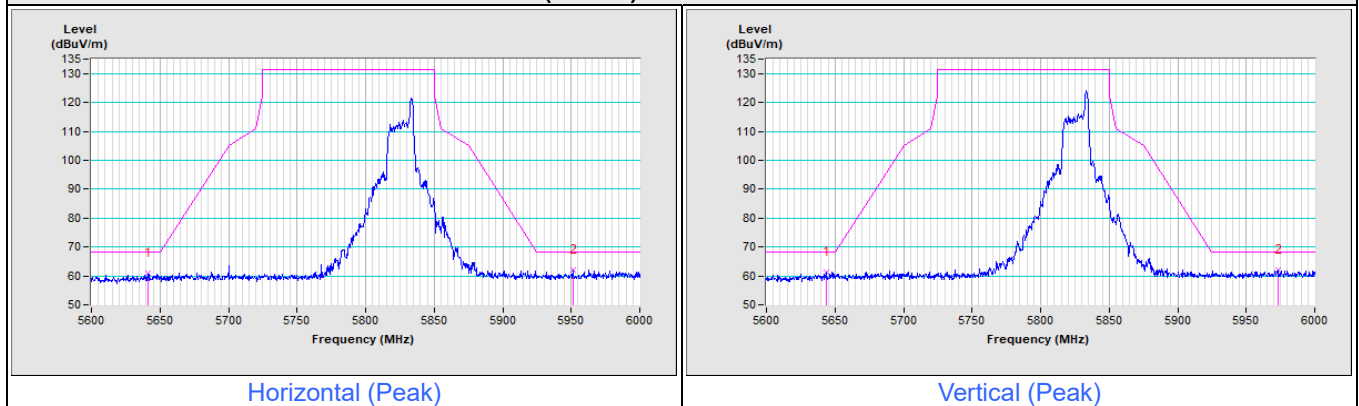


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 36

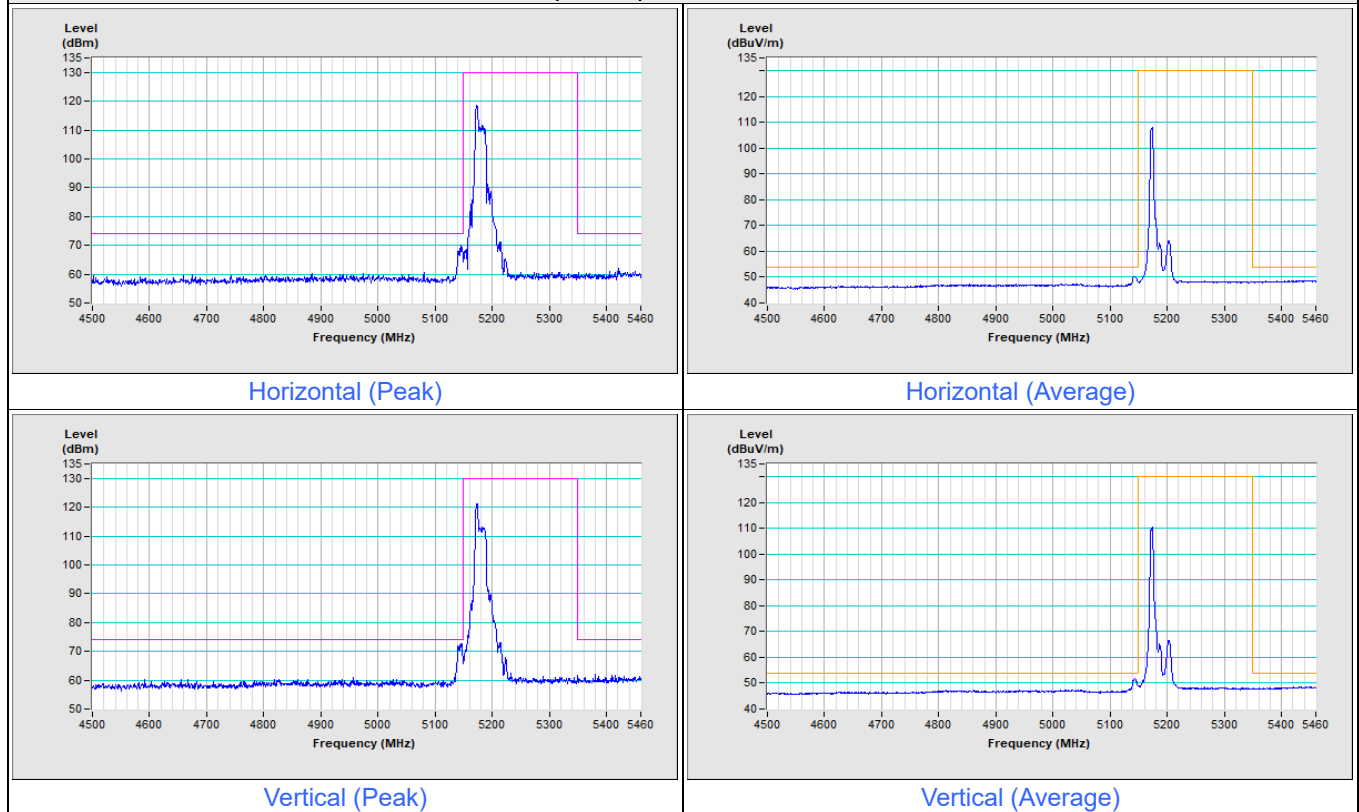


802.11be (EHT20) 52-tone RU Channel 48

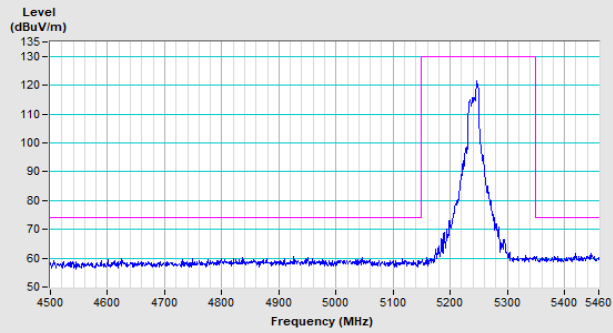


Horizontal (Peak)

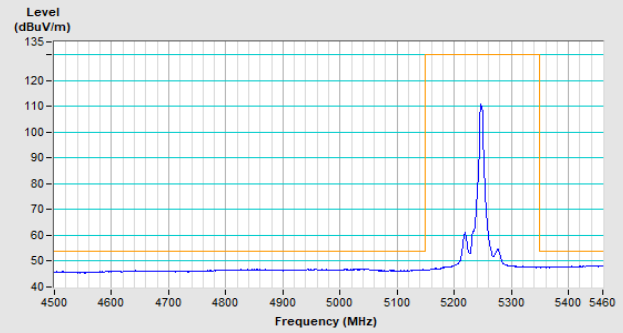

Horizontal (Average)

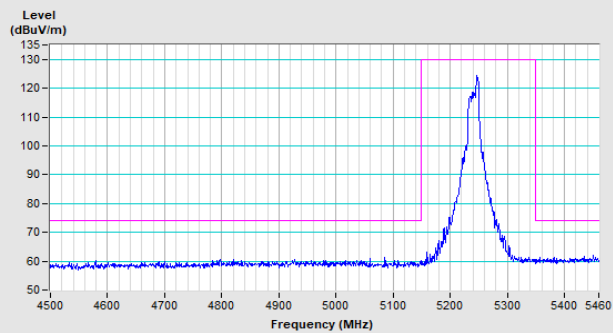


Vertical (Peak)

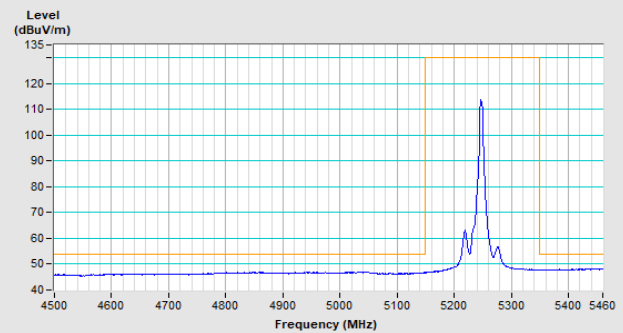


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 52

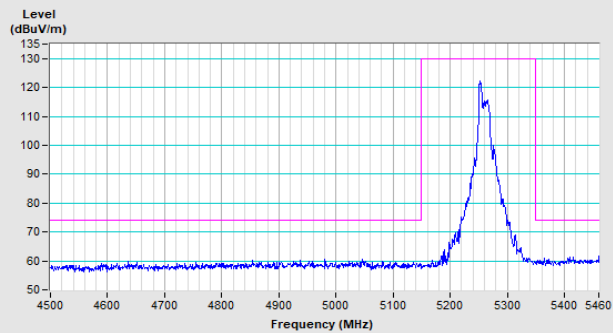


Horizontal (Peak)

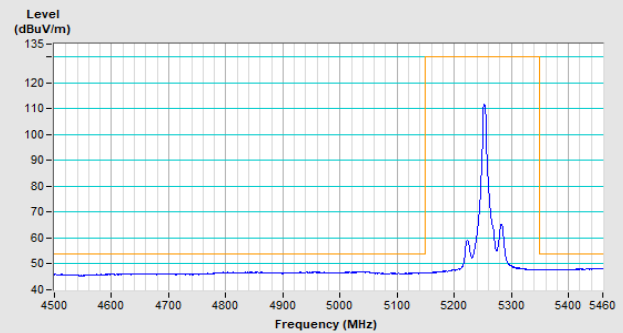

Horizontal (Average)

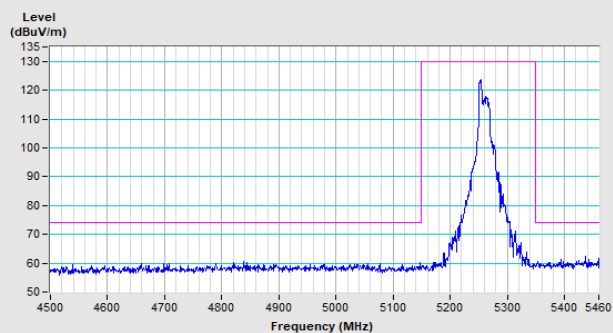


Vertical (Peak)

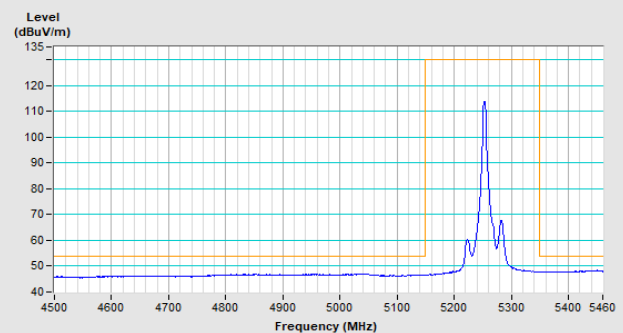


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 64

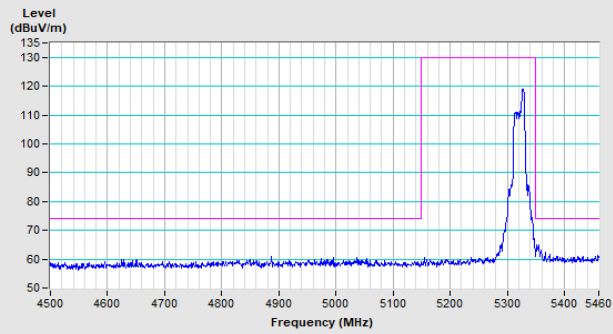


Horizontal (Peak)

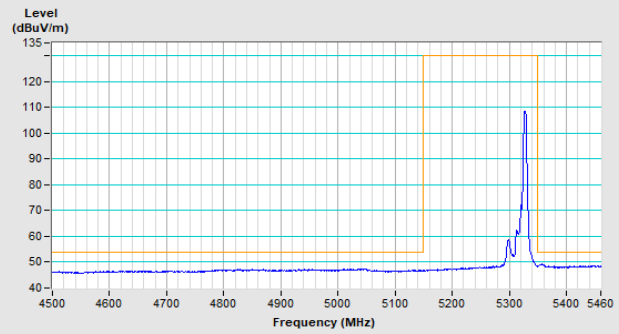

Horizontal (Average)

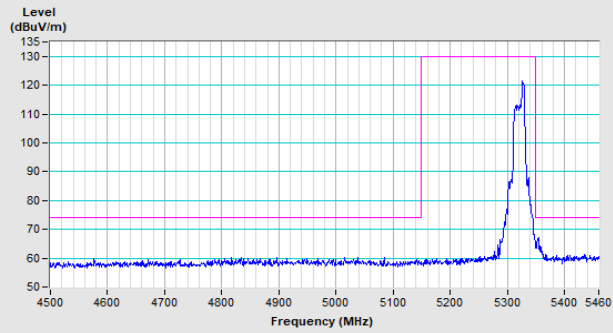


Vertical (Peak)

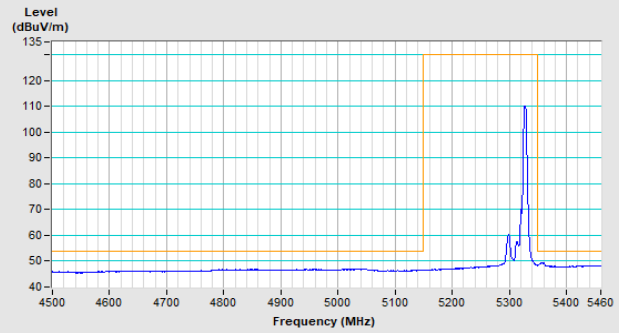


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 100

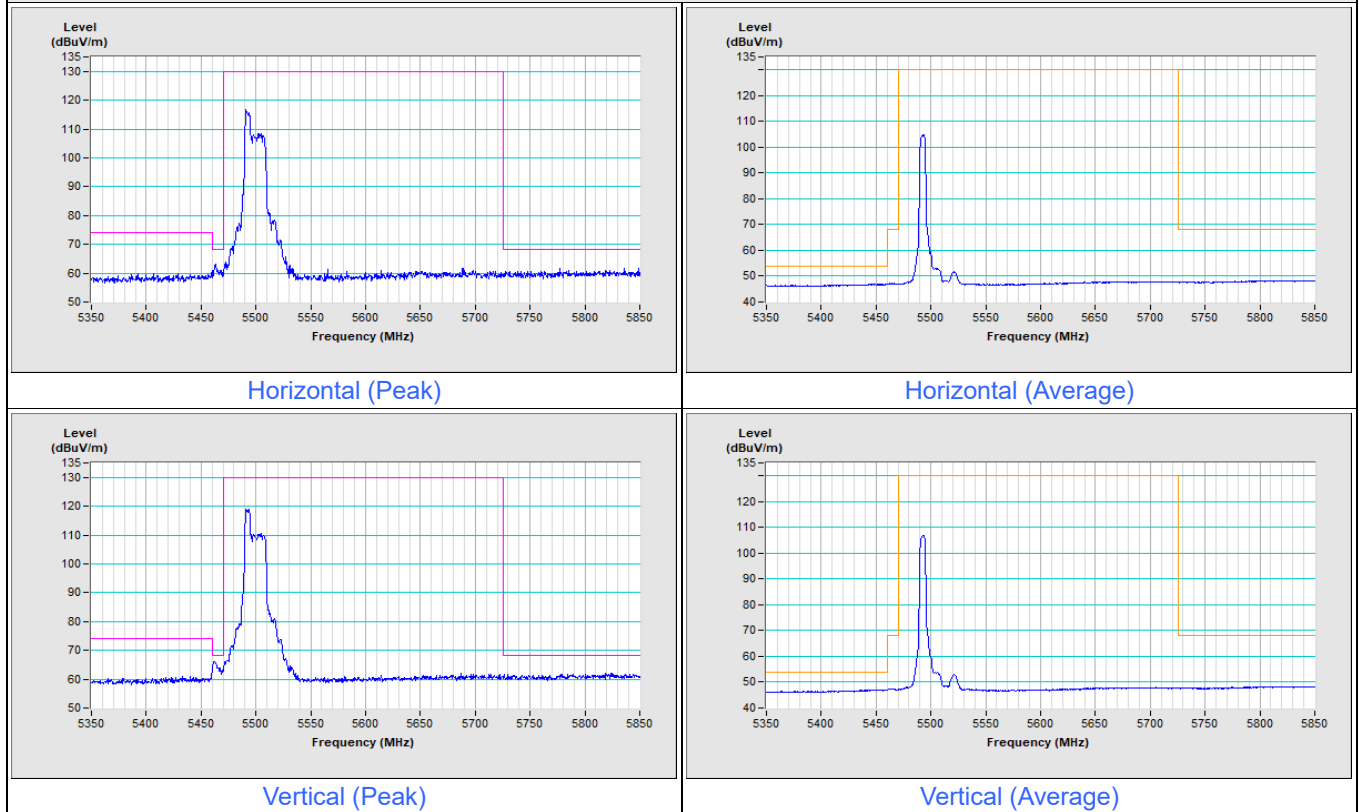


802.11be (EHT20) 52-tone RU Channel 140

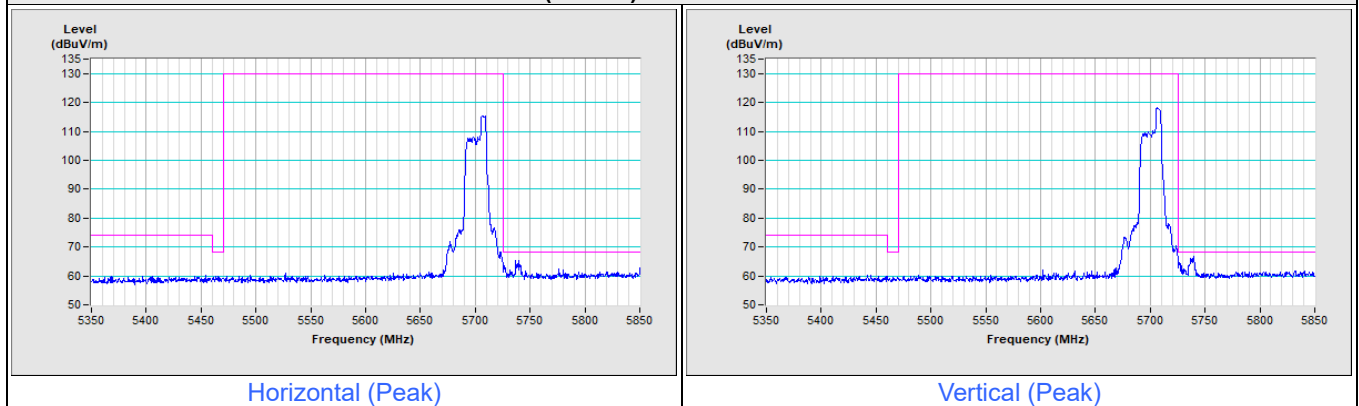


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) 52-tone RU Channel 144

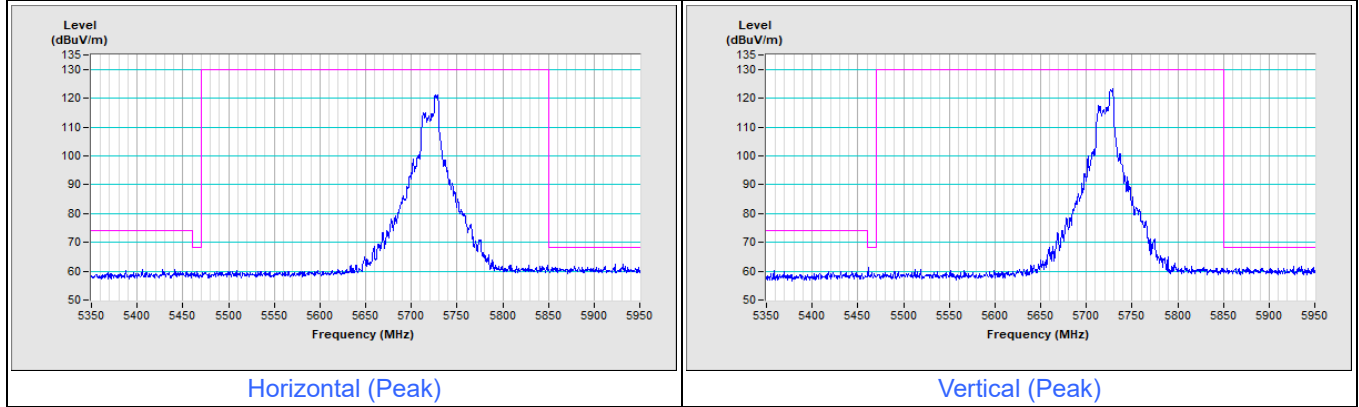


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 52-tone RU Channel 149

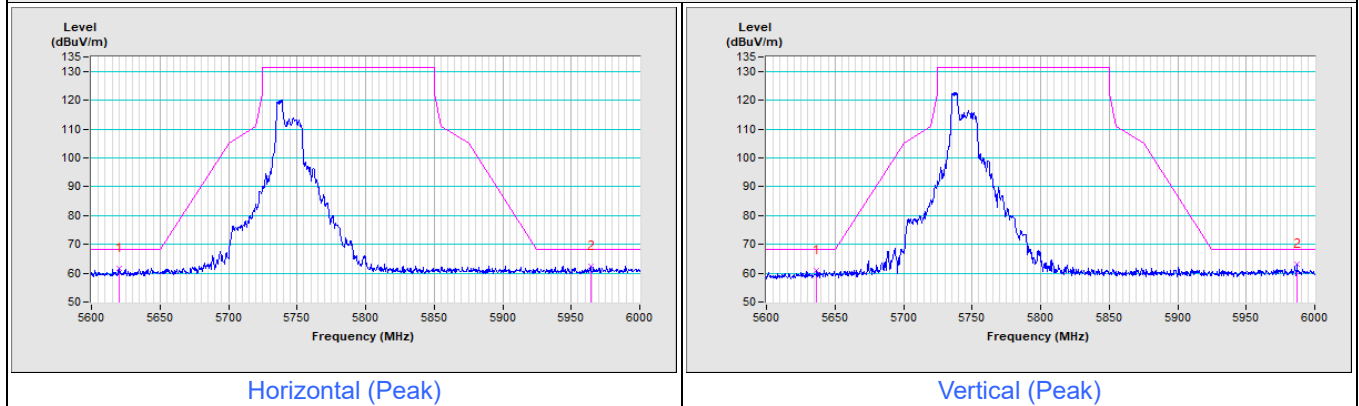

802.11be (EHT20) 52-tone RU Channel 157

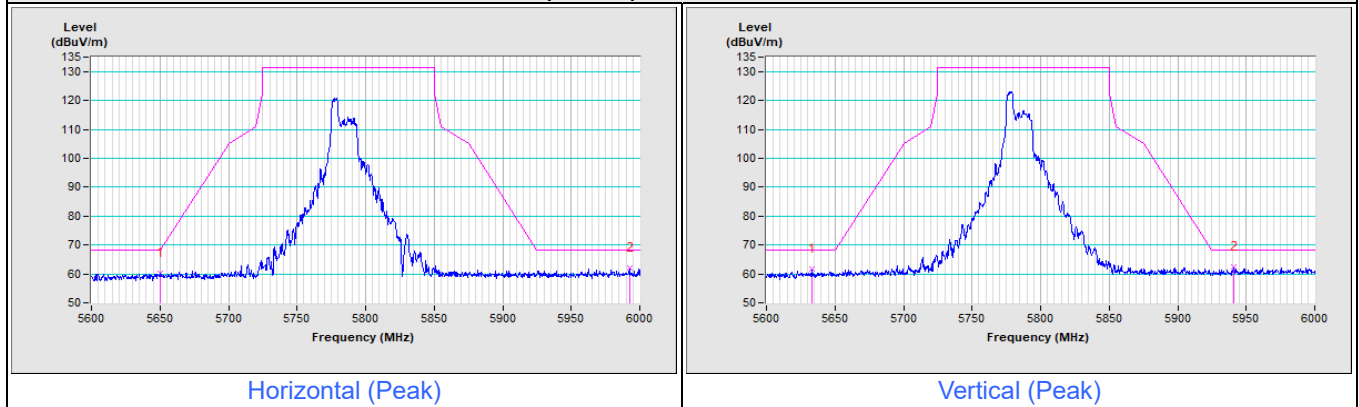


802.11be (EHT20) 52-tone RU Channel 165

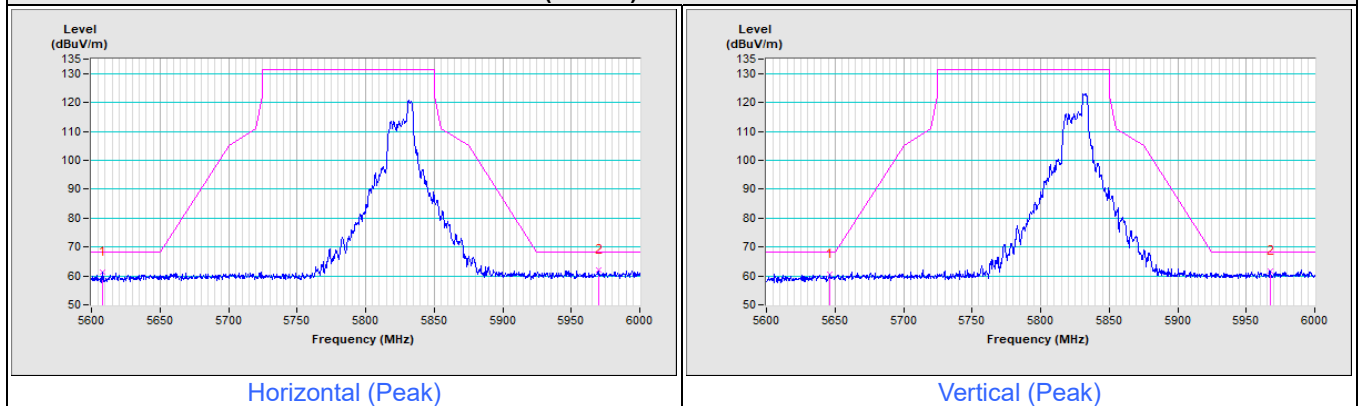


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 36

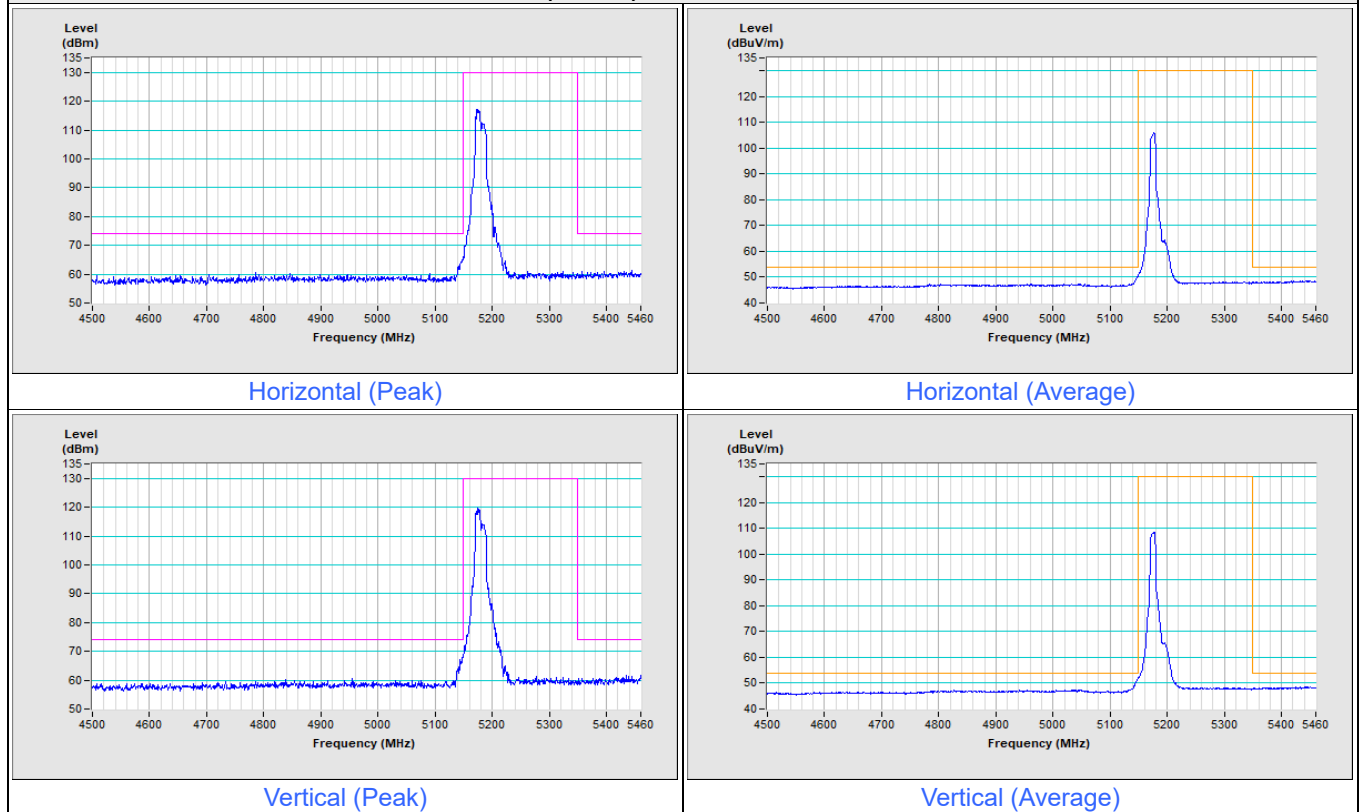


802.11be (EHT20) 106-tone RU Channel 48

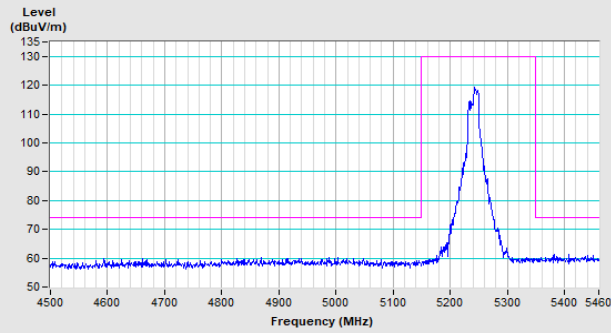


Horizontal (Peak)

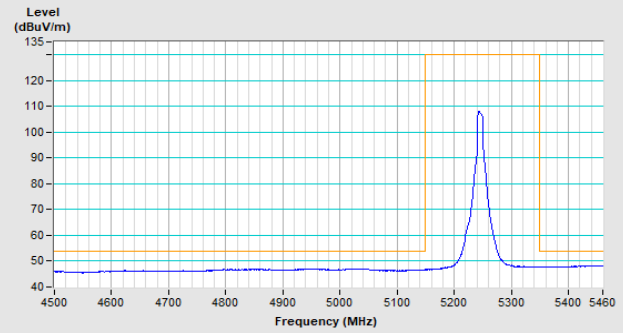

Horizontal (Average)

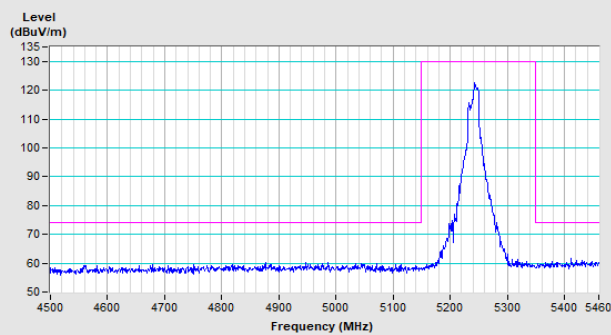


Vertical (Peak)

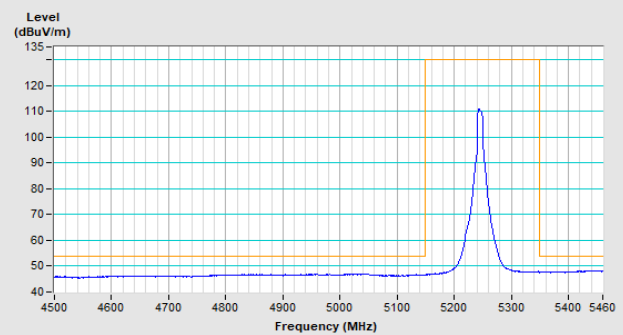


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 52

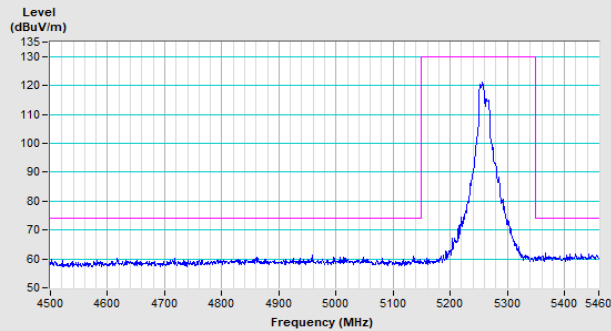


Horizontal (Peak)

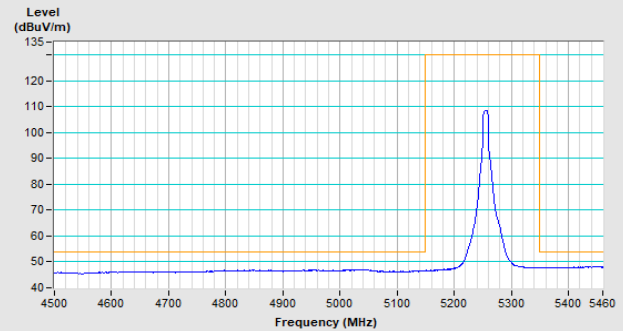

Horizontal (Average)

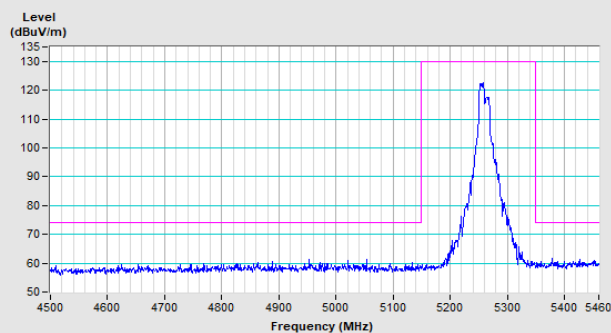


Vertical (Peak)

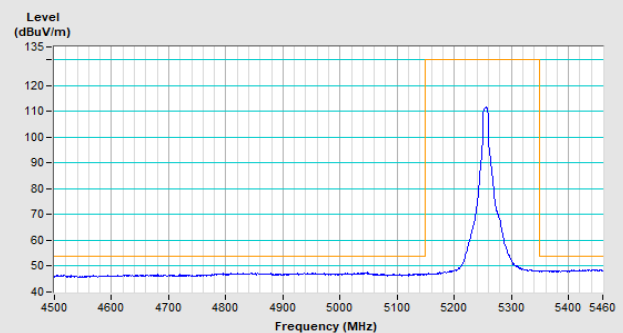


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 64

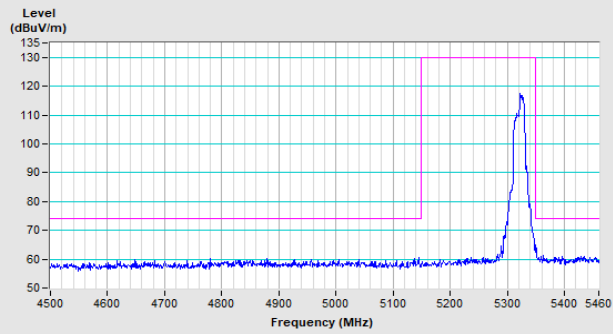


Horizontal (Peak)

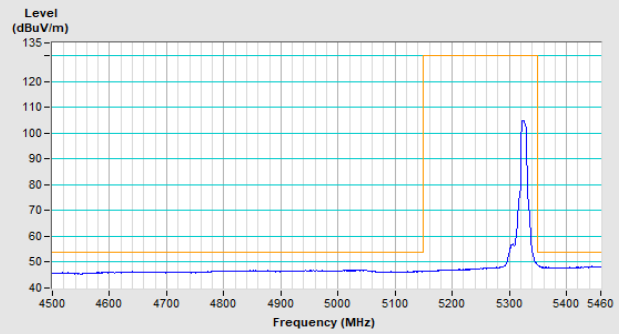

Horizontal (Average)

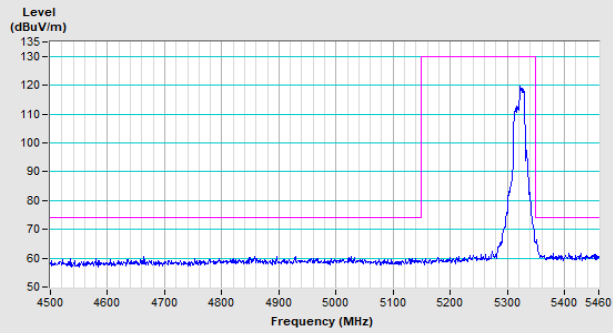


Vertical (Peak)

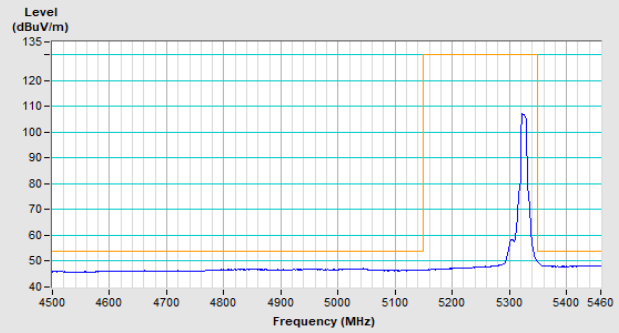


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 100

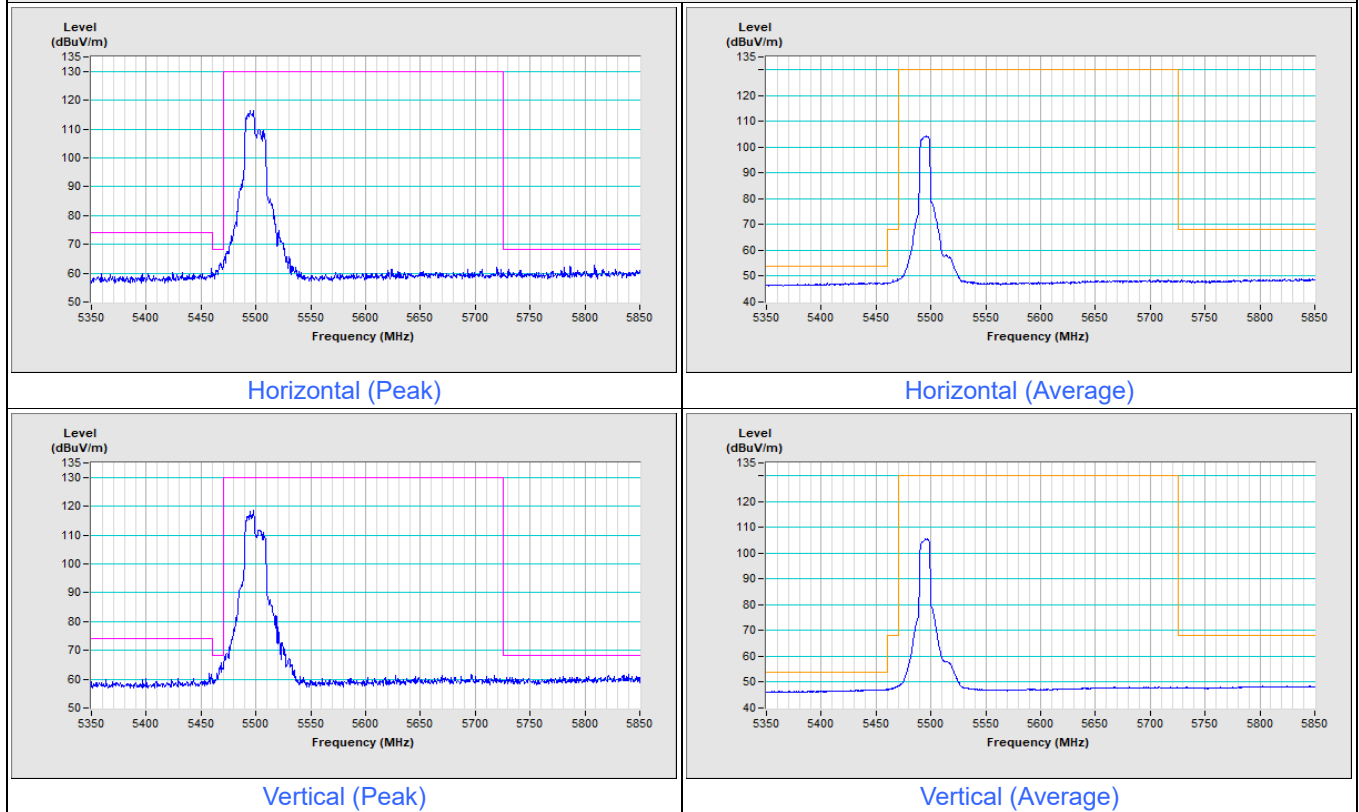

802.11be (EHT20) 106-tone RU Channel 140

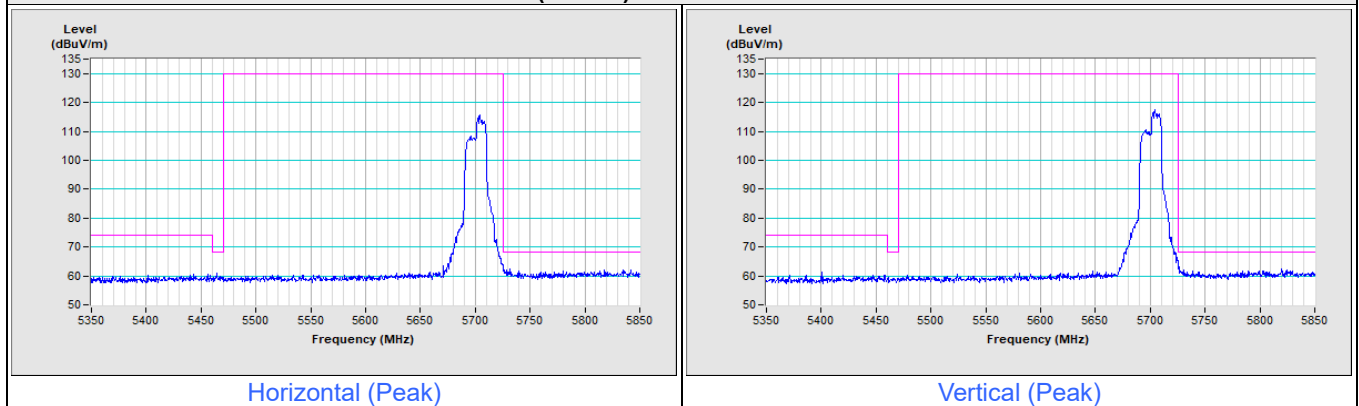


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

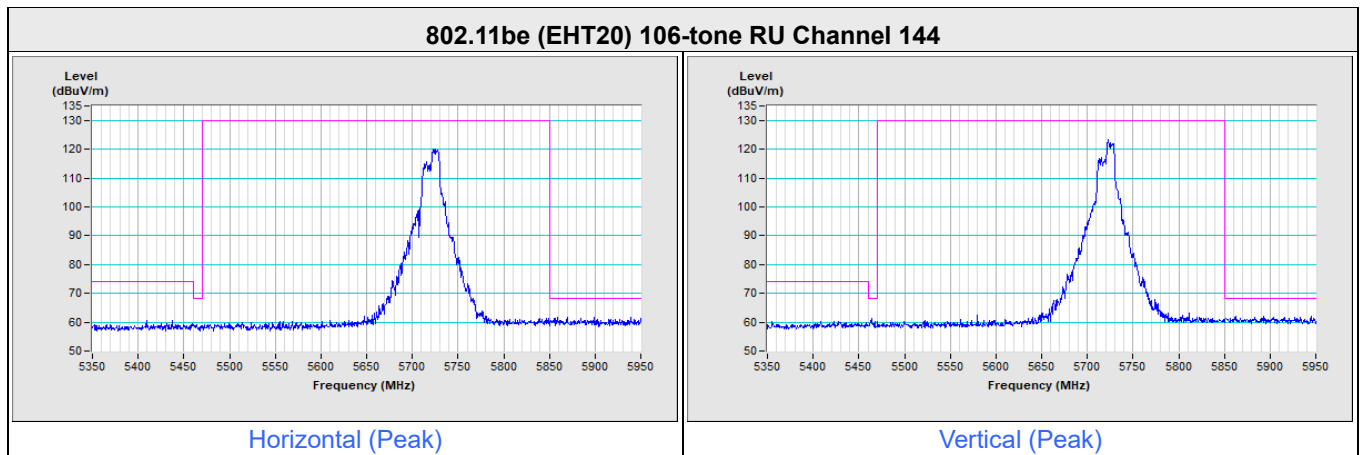


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 106-tone RU Channel 149

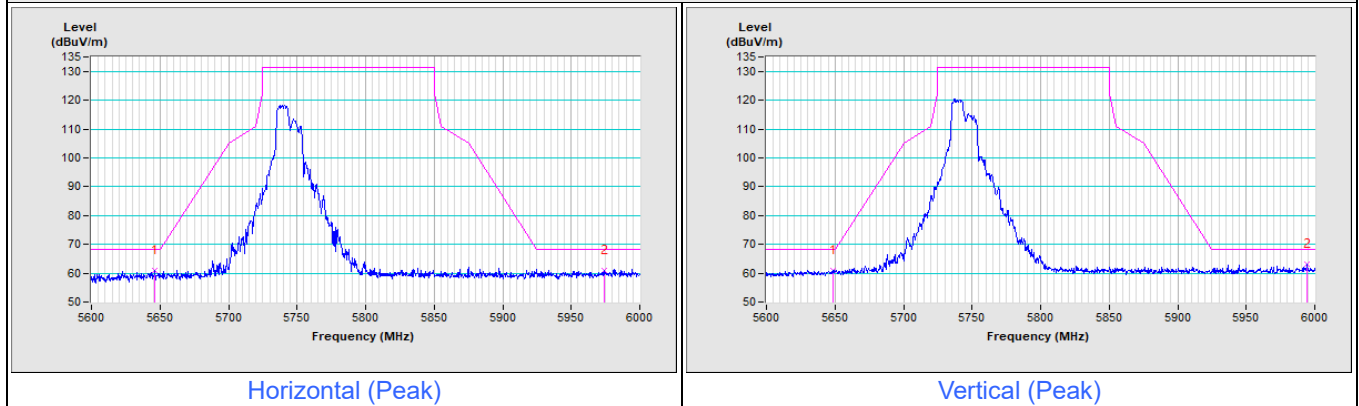

802.11be (EHT20) 106-tone RU Channel 157

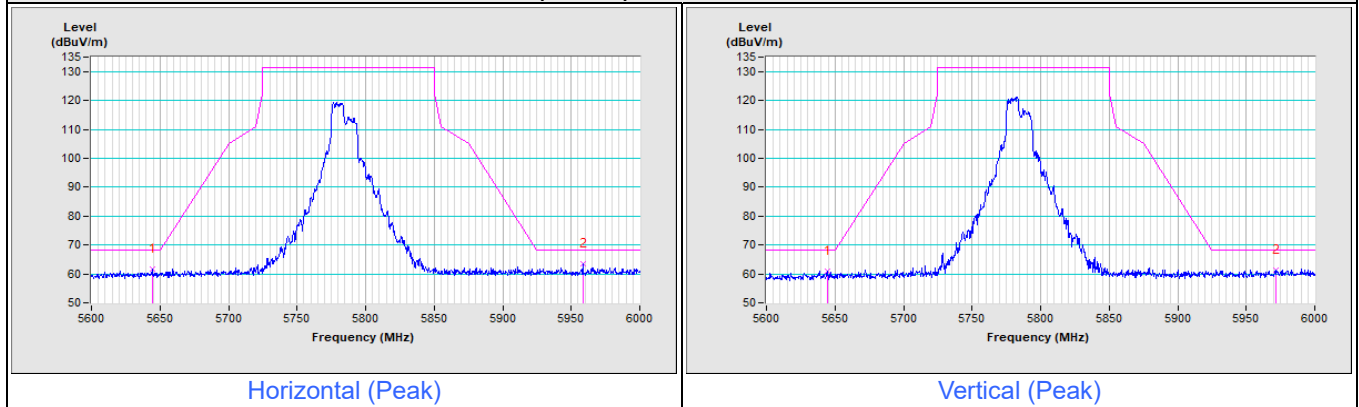


802.11be (EHT20) 106-tone RU Channel 165

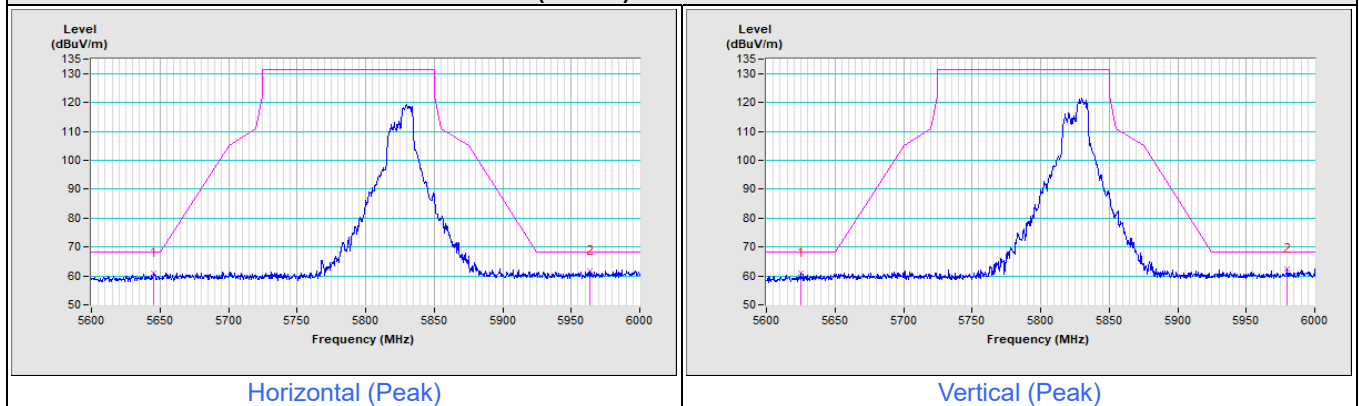


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 48

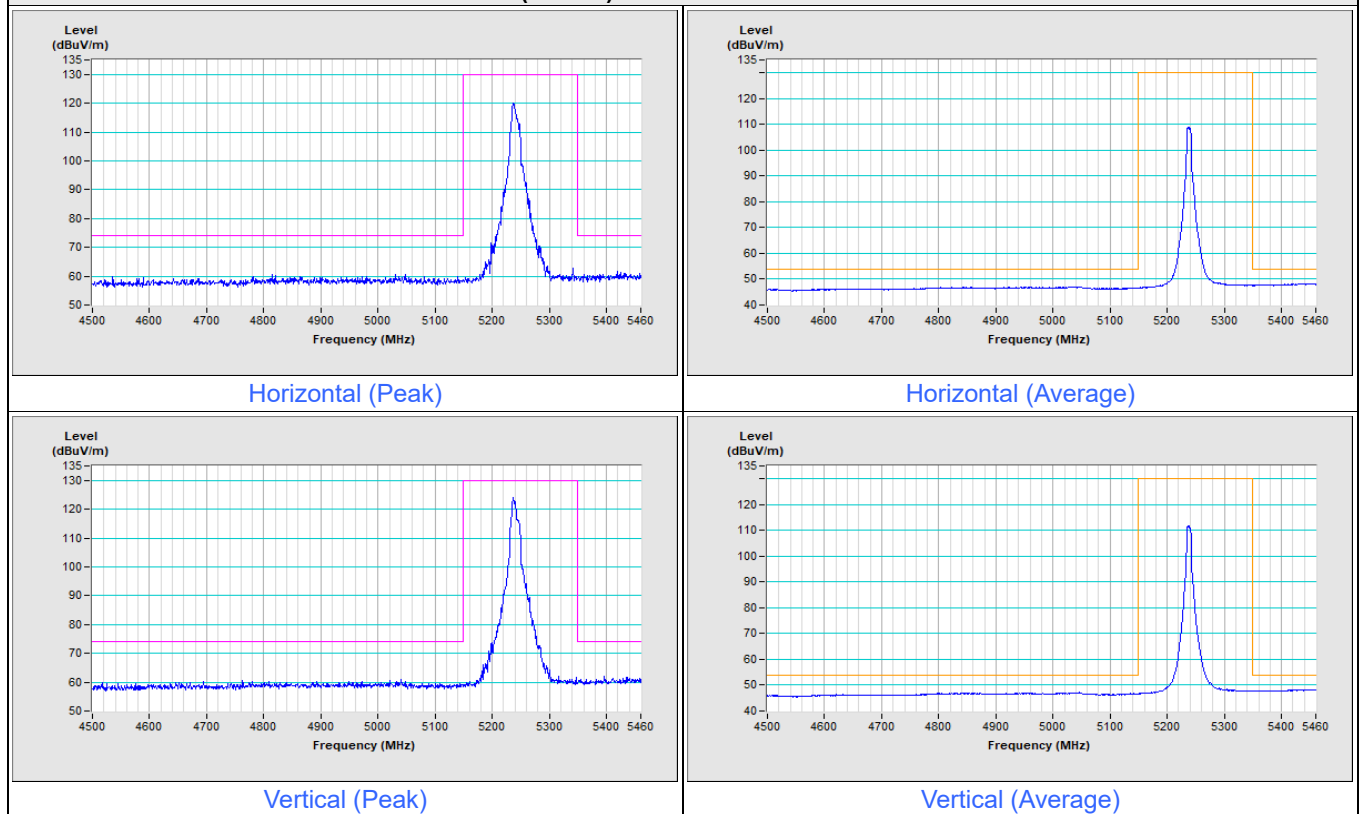


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT20) 52+26-tone MRU Channel 157

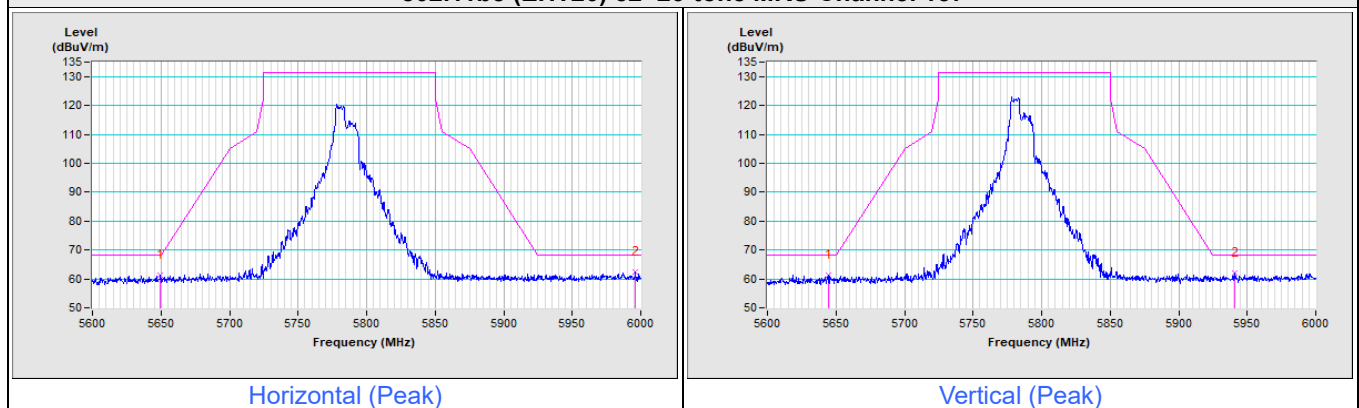


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 48

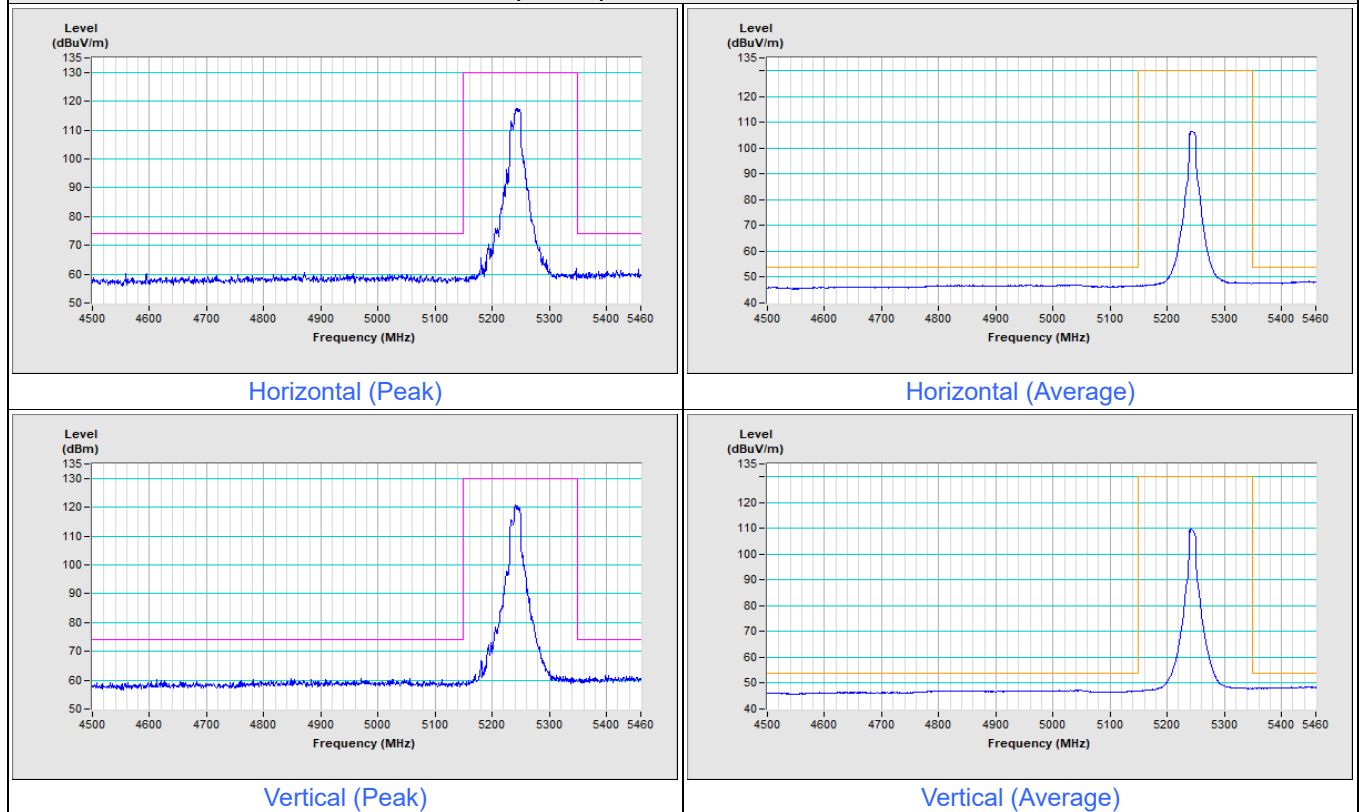


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT20) 106+26-tone MRU Channel 157

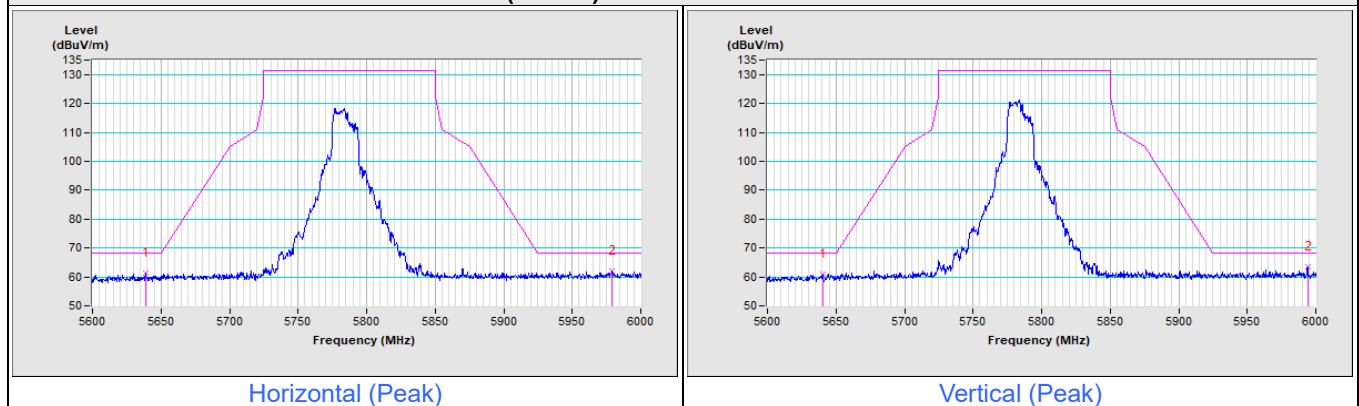


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 42

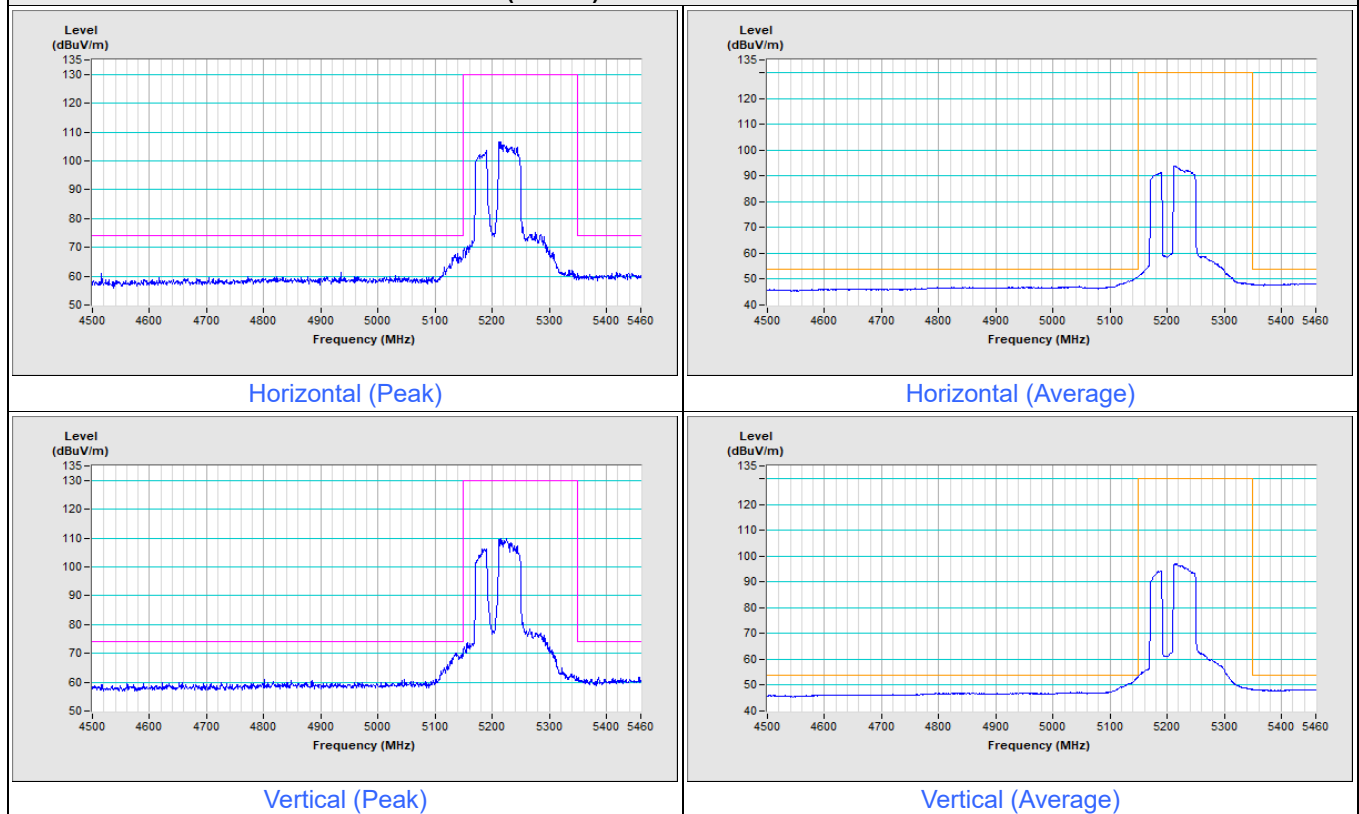


802.11be (EHT80) 484+242-tone MRU Channel 58

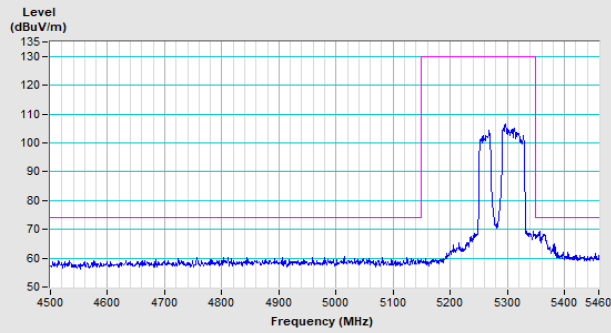


Horizontal (Peak)

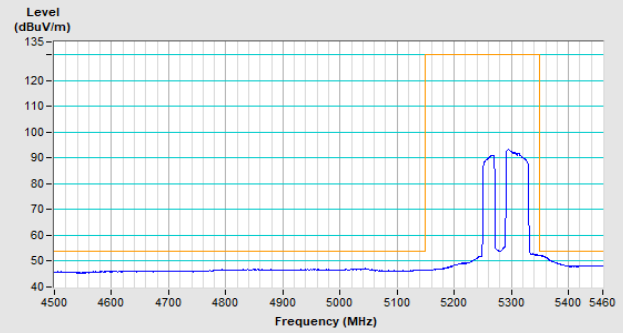

Horizontal (Average)

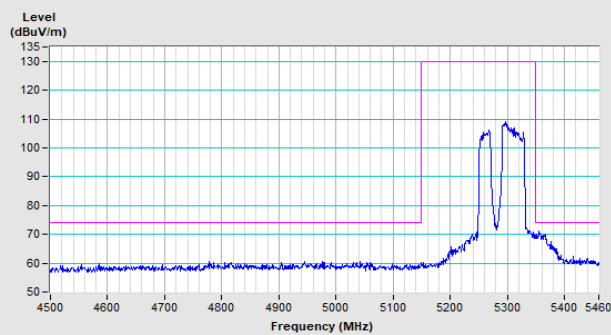


Vertical (Peak)

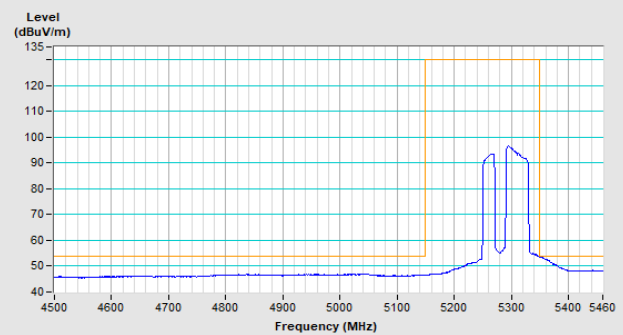


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) 484+242-tone MRU Channel 138

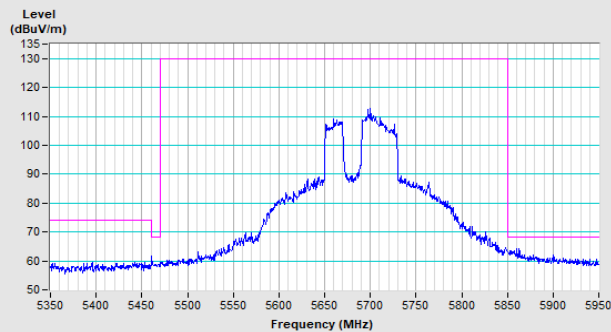


Horizontal (Peak)

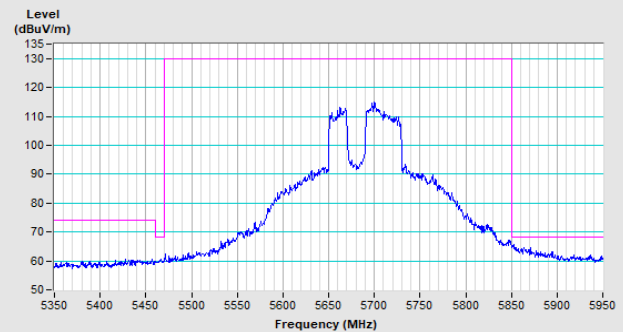

Vertical (Peak)


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) 484+242-tone MRU Channel 155

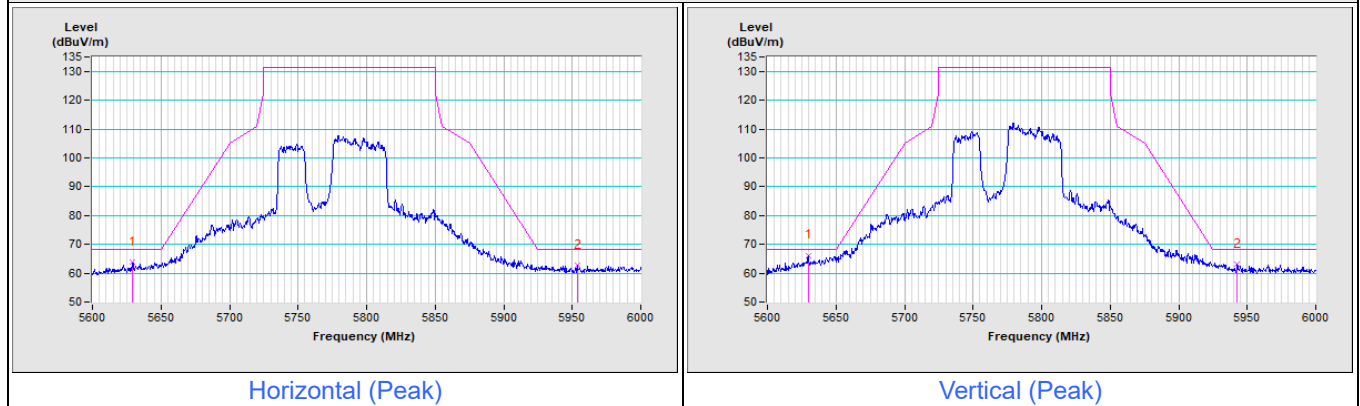


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 50

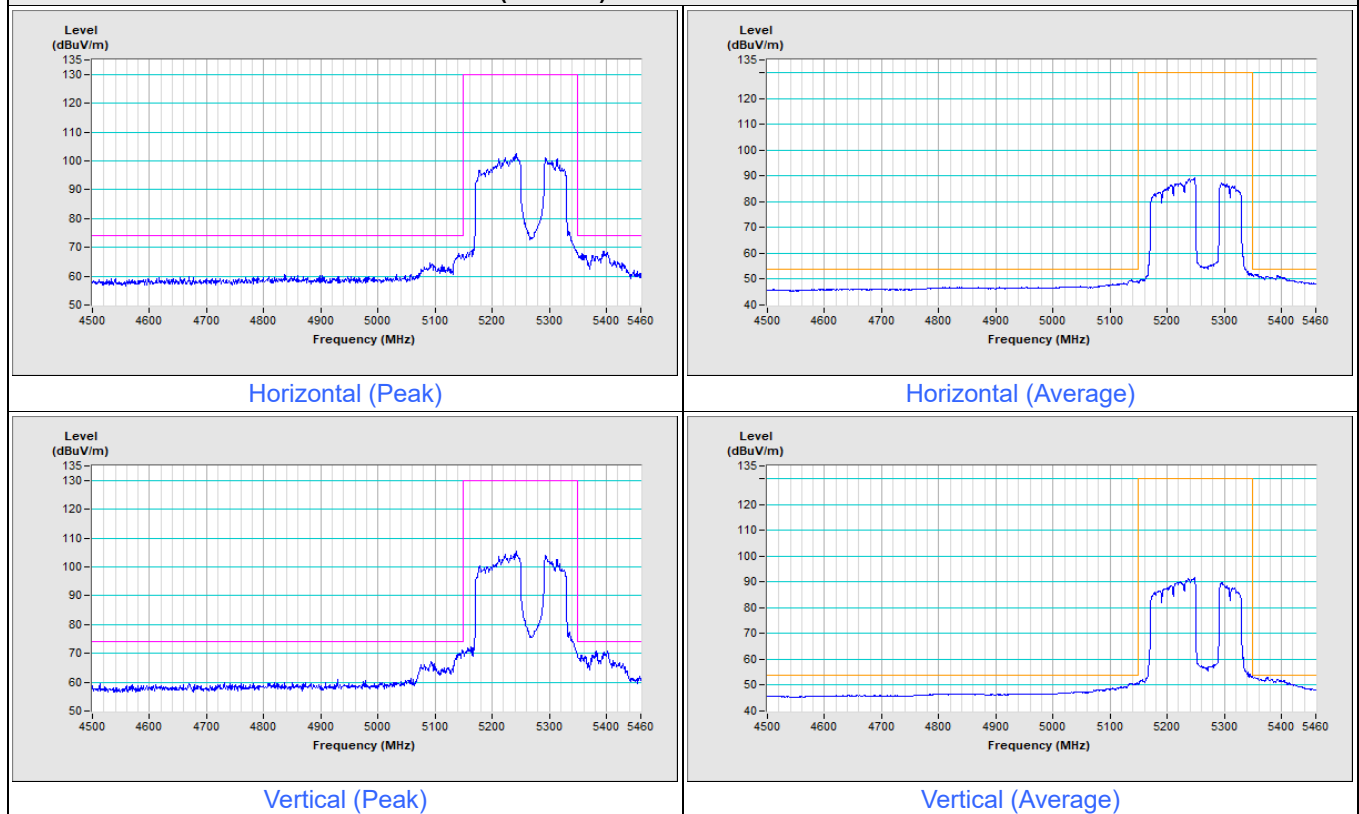


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 114

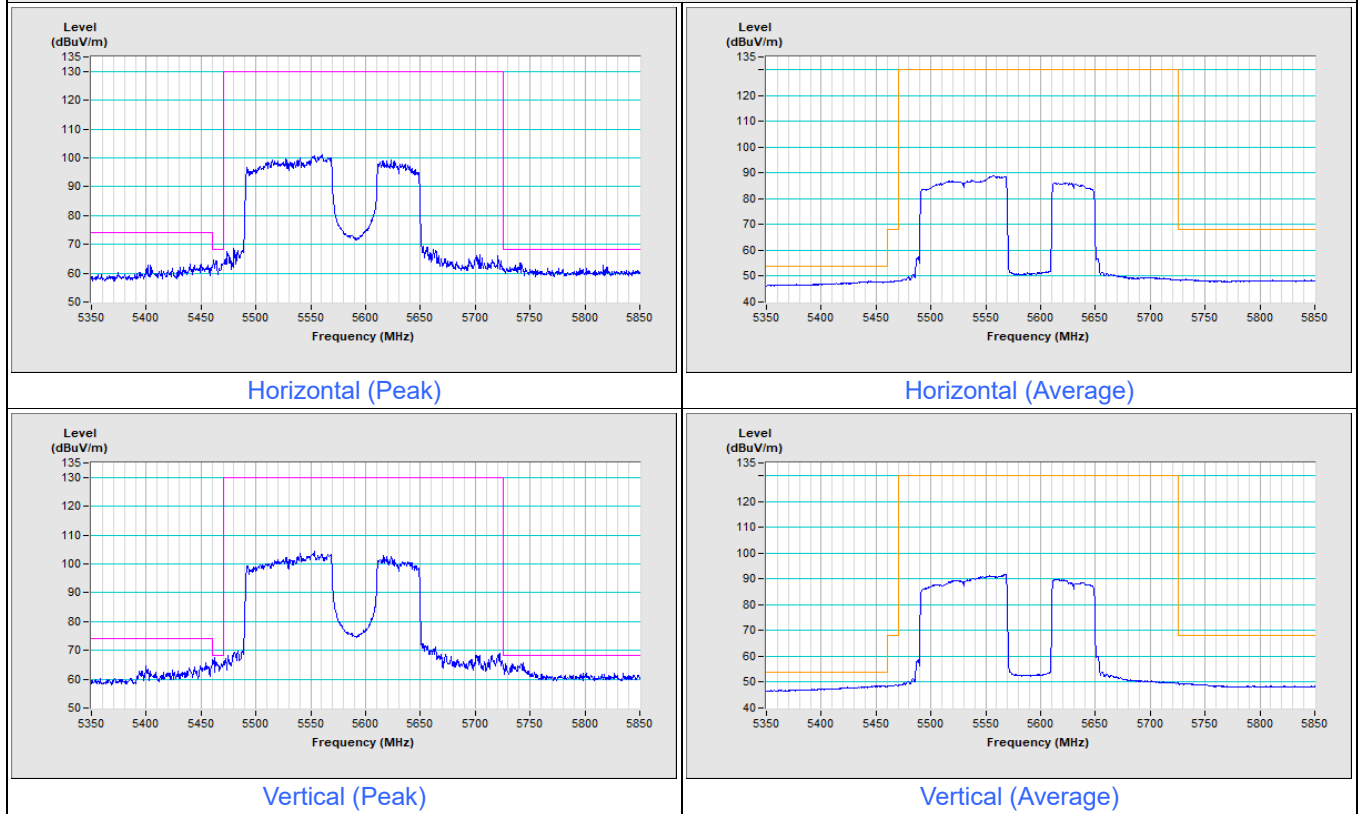


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 50

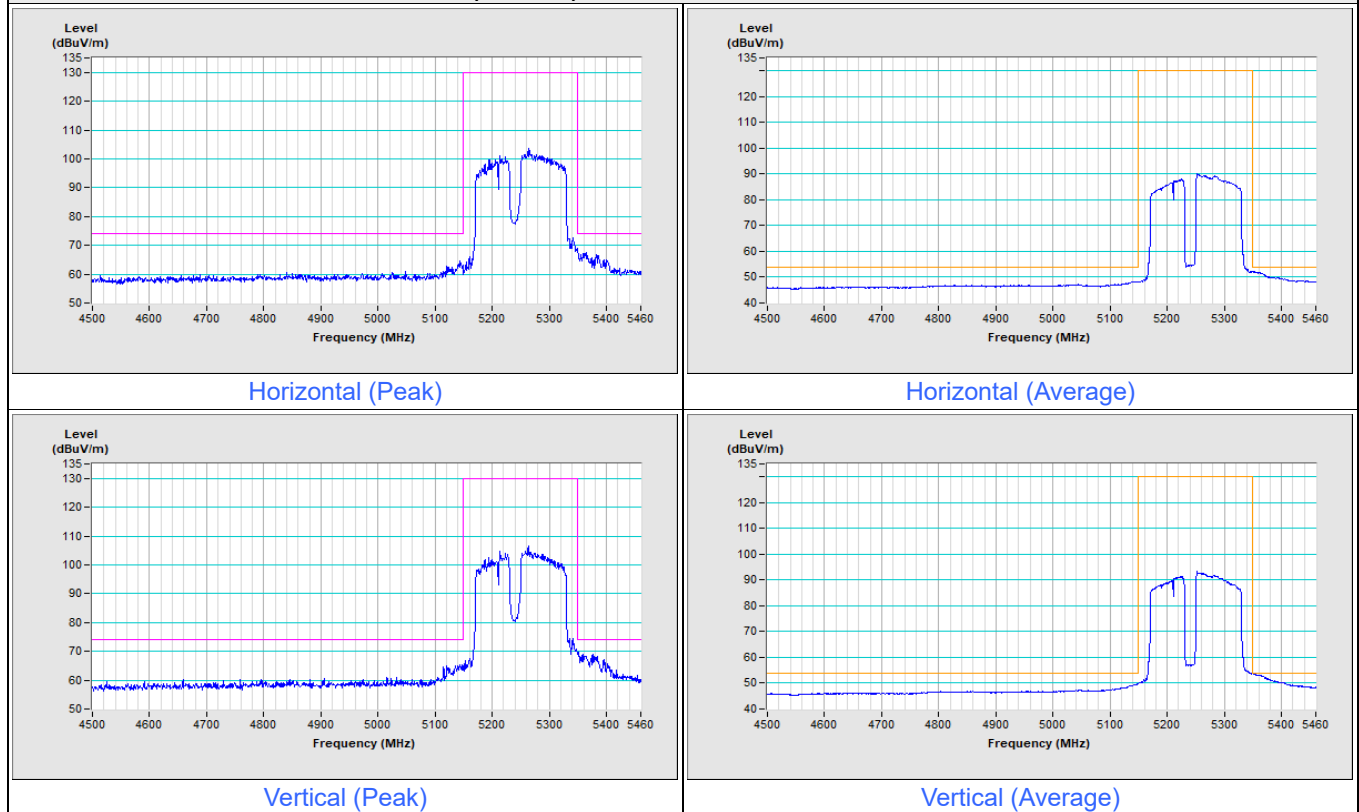


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 114

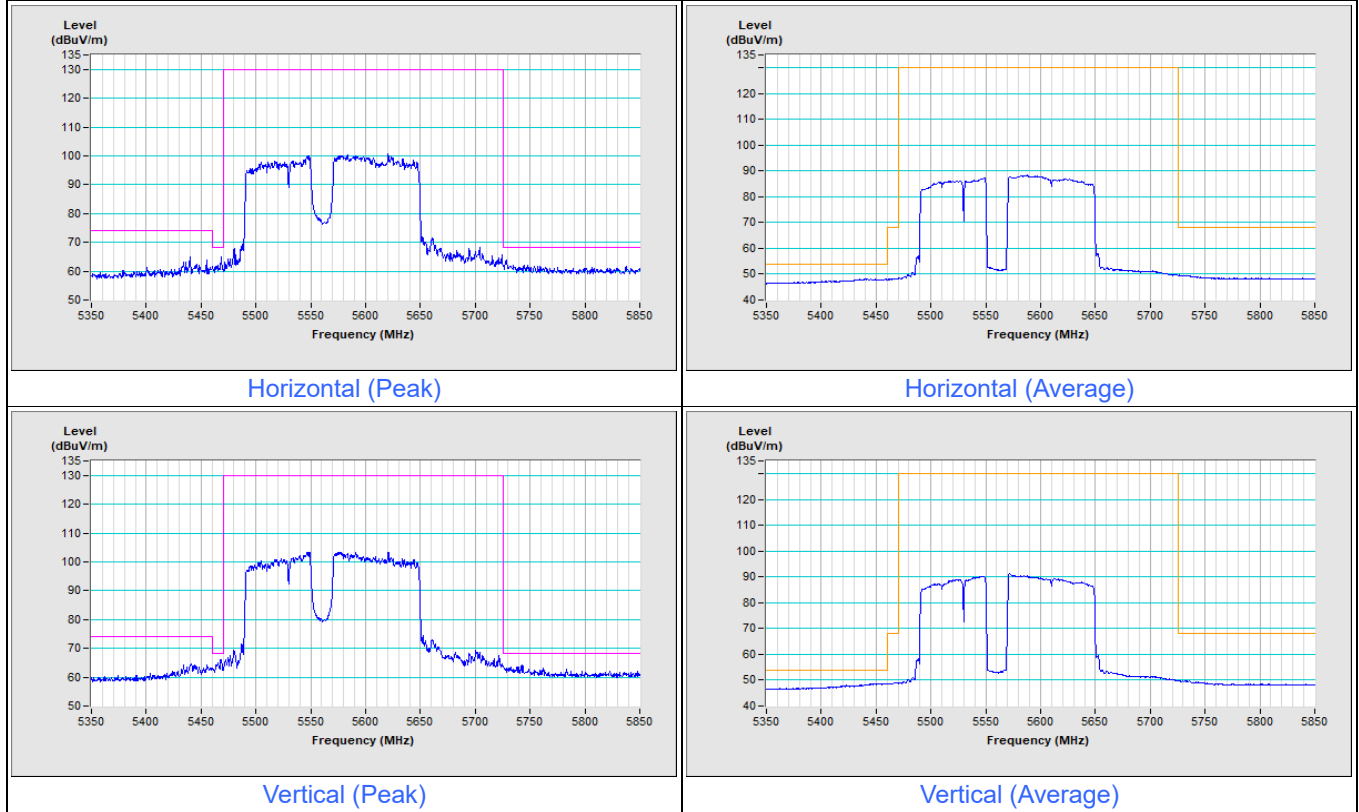


2TX (Test Mode A - PIFA Antenna)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

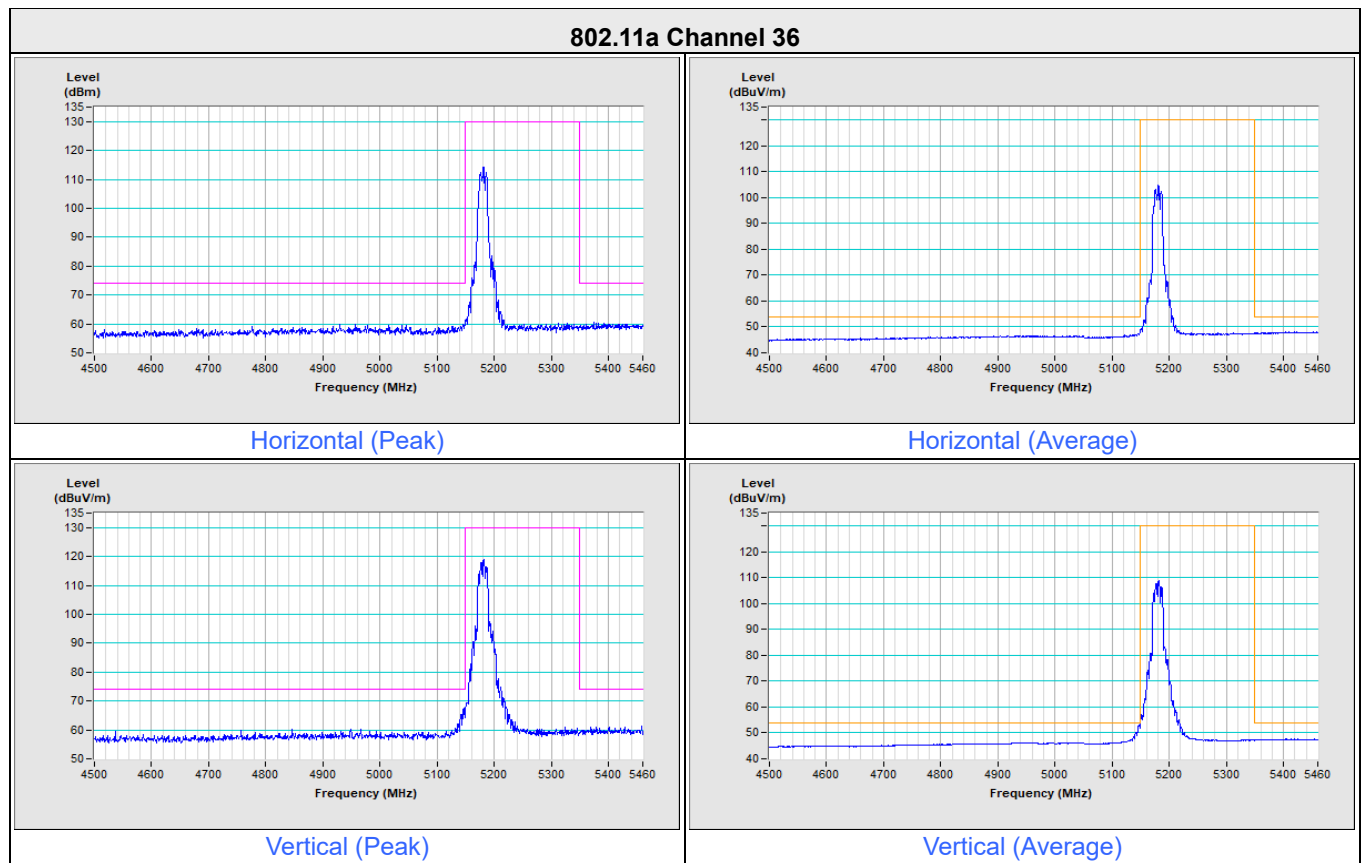


802.11a Channel 48

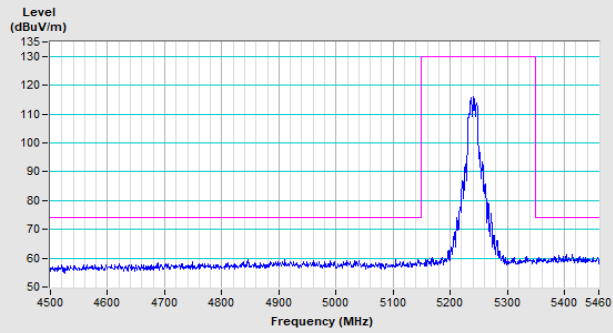


Horizontal (Peak)

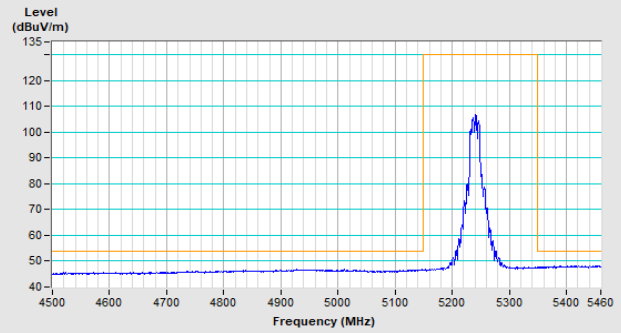

Horizontal (Average)

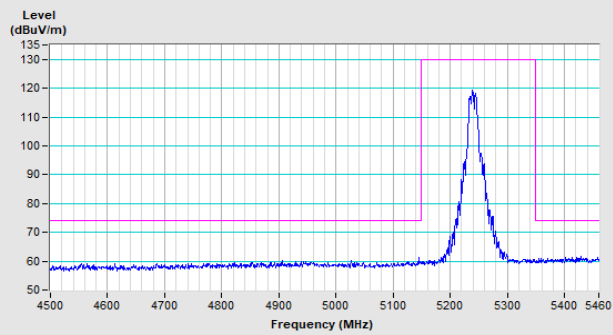


Vertical (Peak)

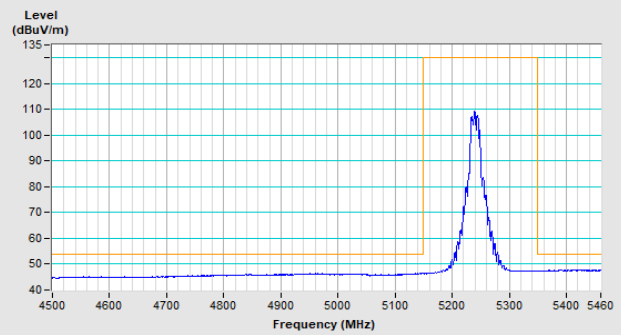


Vertical (Average)


802.11a Channel 52

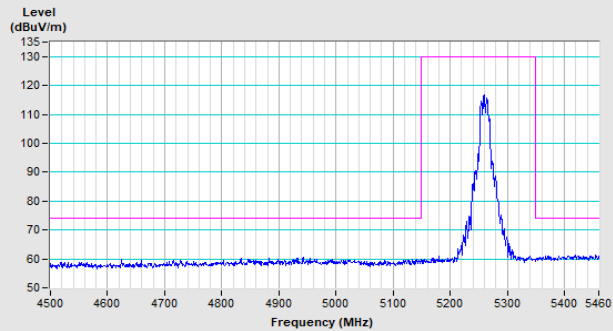


Horizontal (Peak)

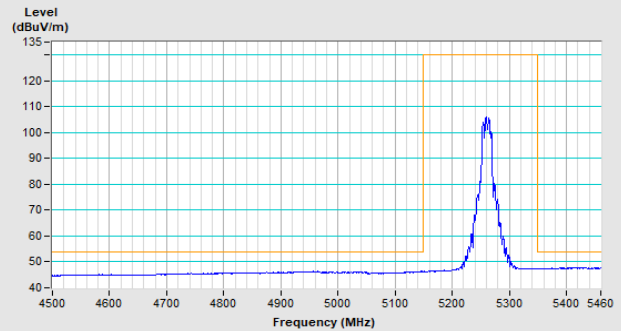

Horizontal (Average)

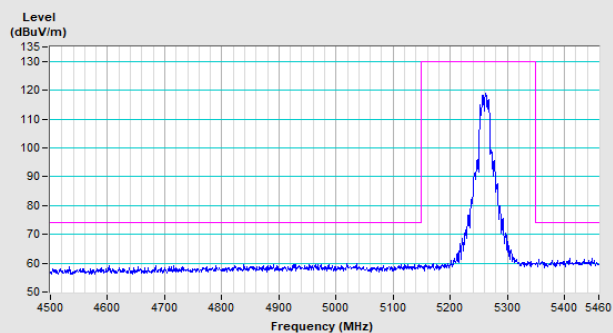


Vertical (Peak)

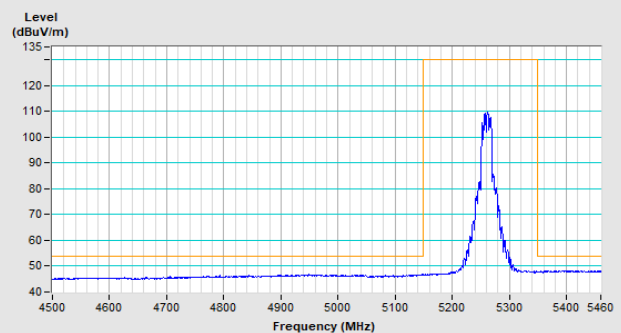


Vertical (Average)


802.11a Channel 64

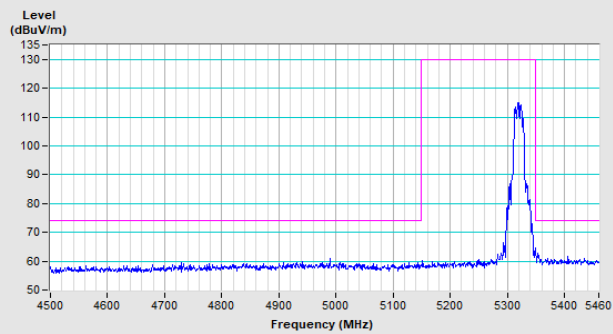


Horizontal (Peak)

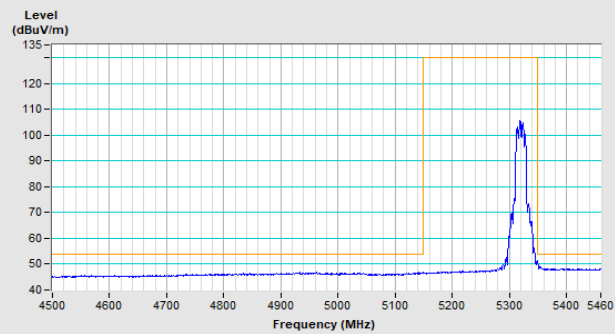

Horizontal (Average)

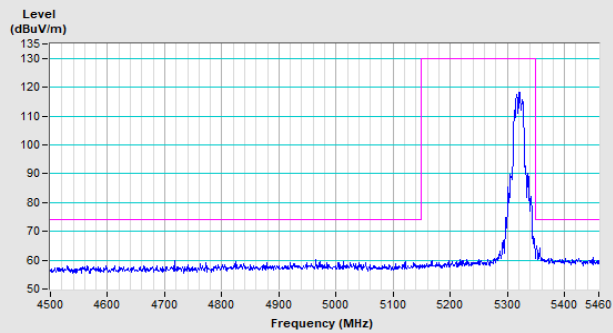


Vertical (Peak)

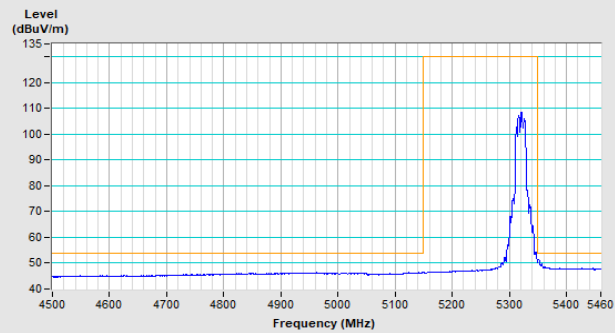


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

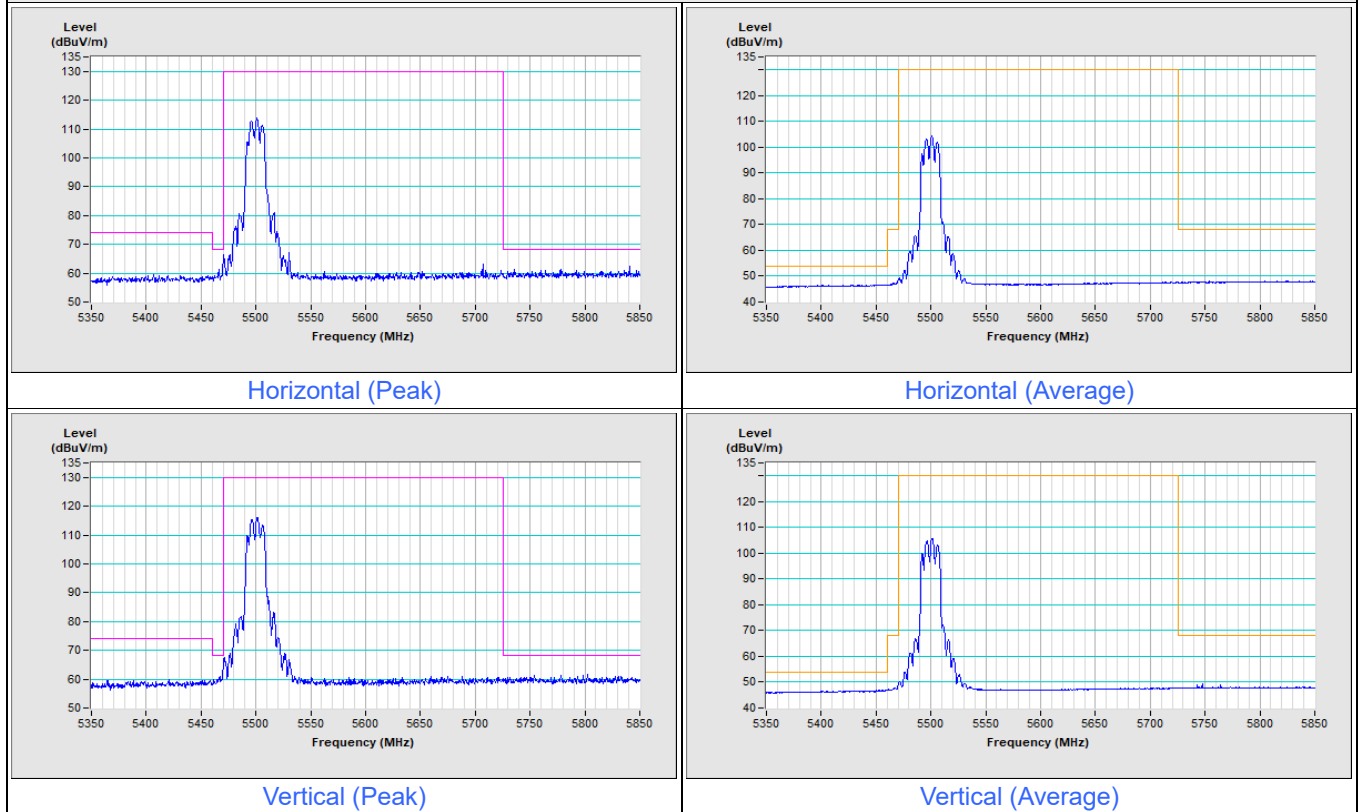

802.11a Channel 140

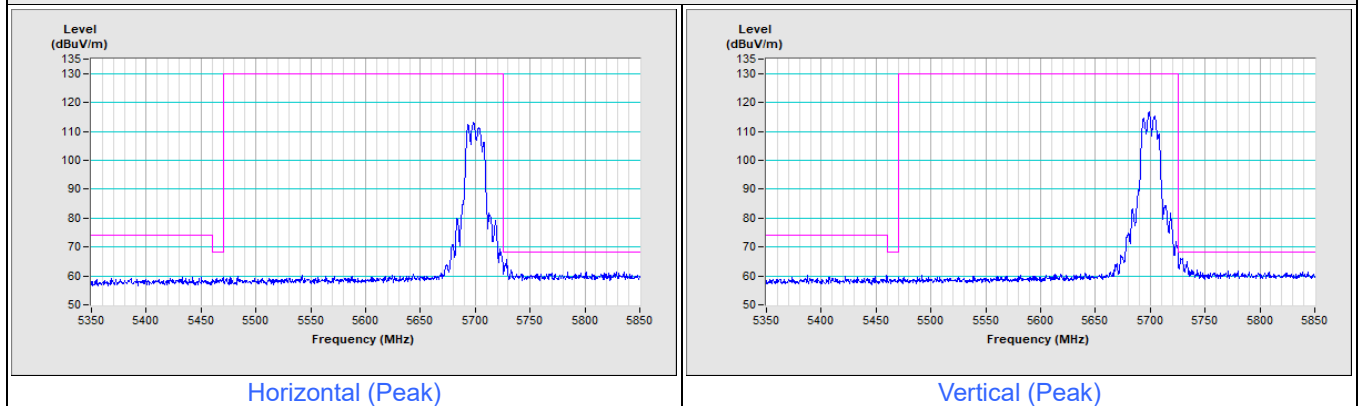


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

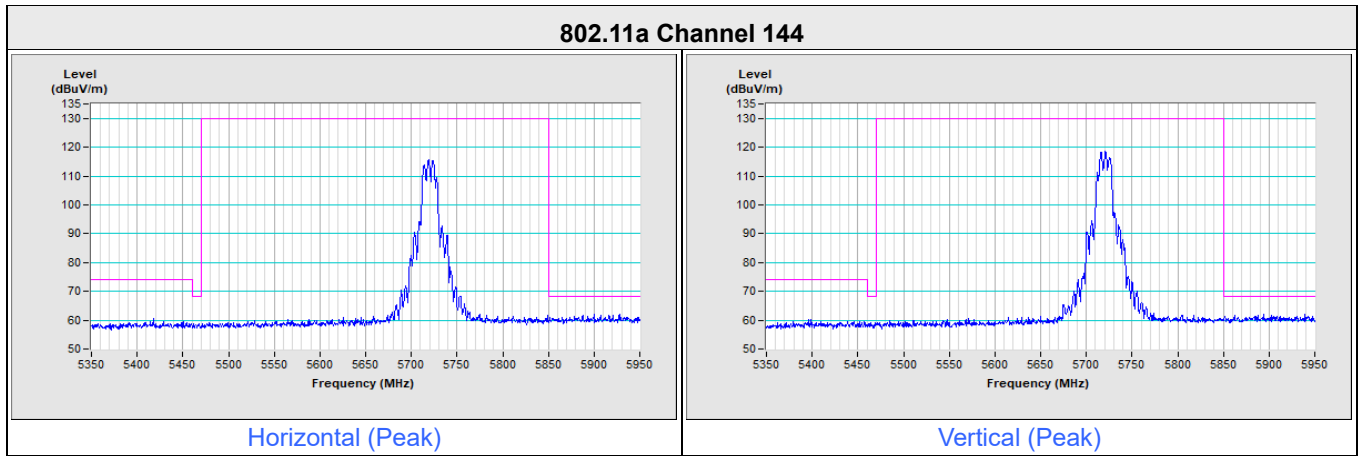


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11a Channel 149

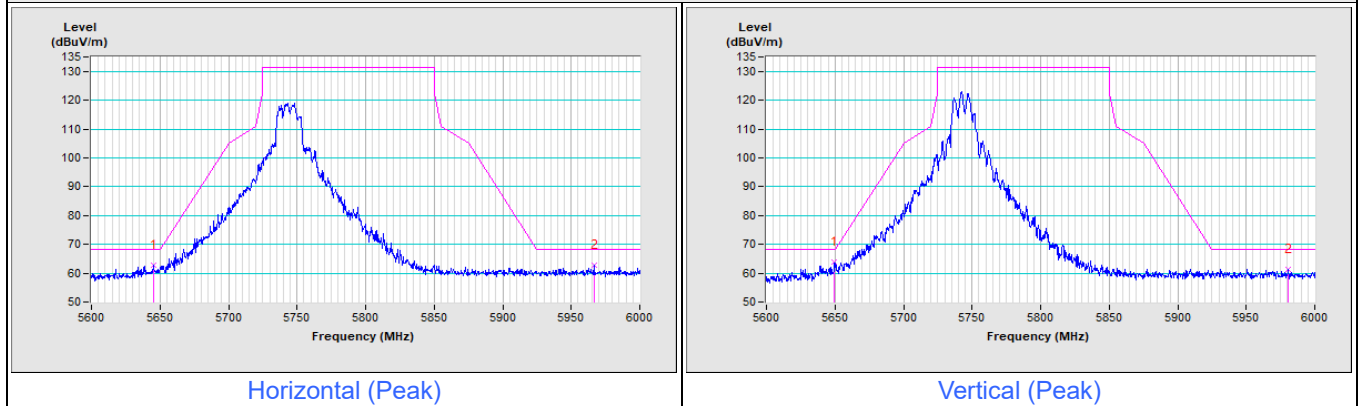


802.11a Channel 157

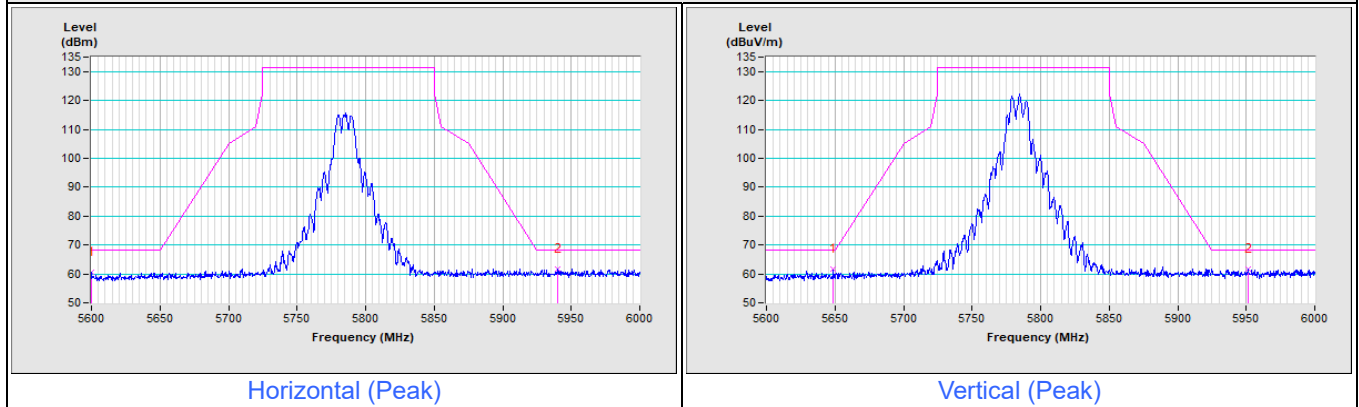


802.11a Channel 165

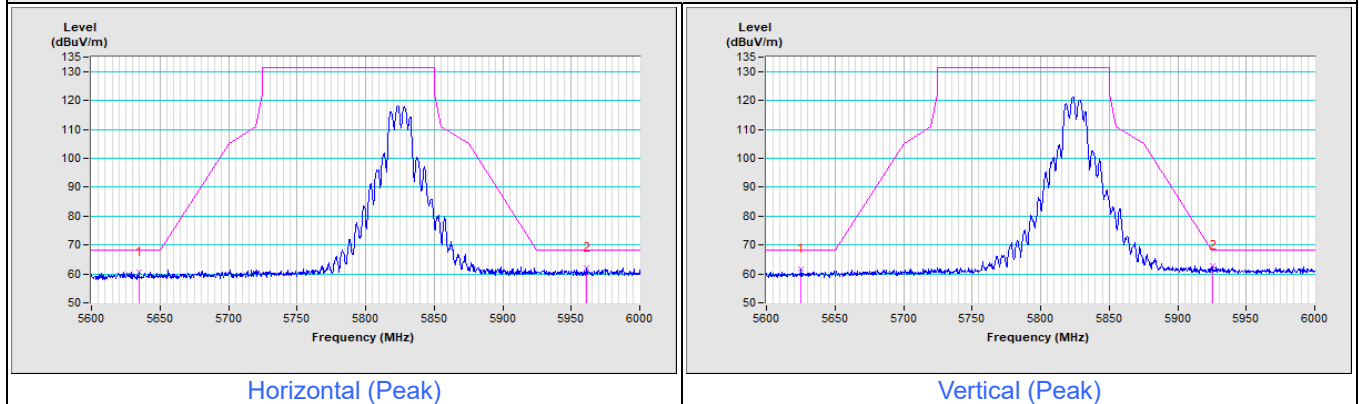


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

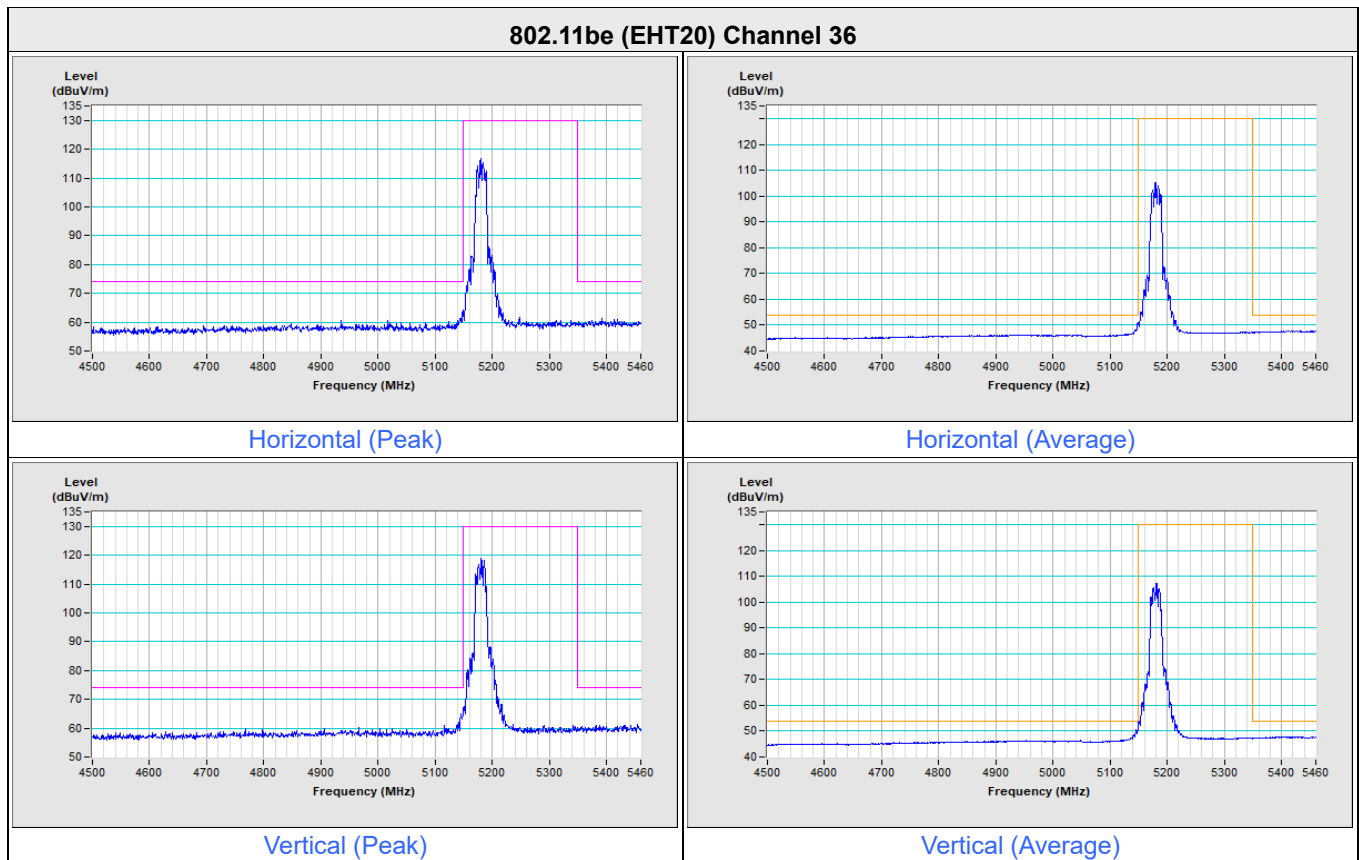


802.11be (EHT20) Channel 48

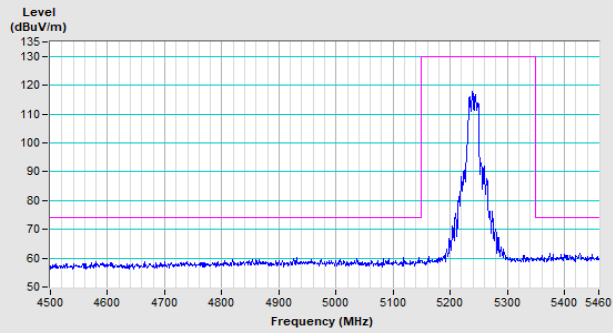


Horizontal (Peak)

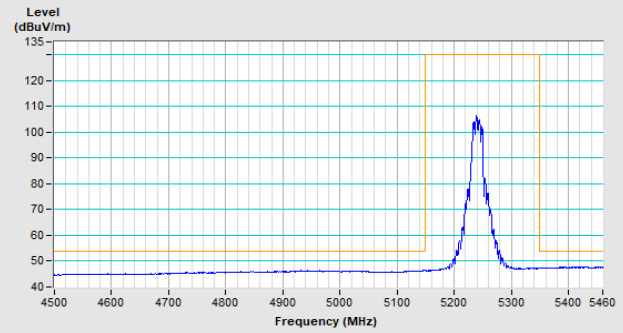

Horizontal (Average)

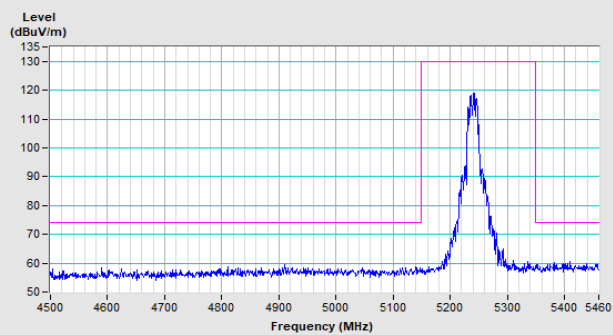


Vertical (Peak)

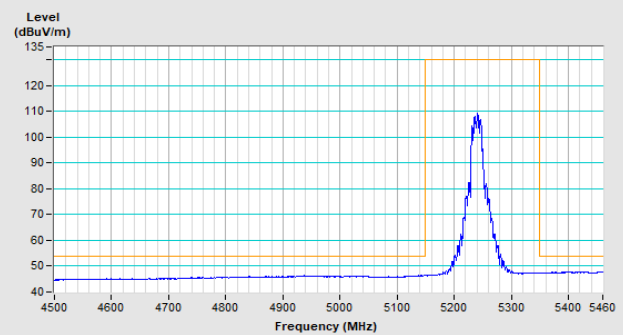


Vertical (Average)


802.11be (EHT20) Channel 52

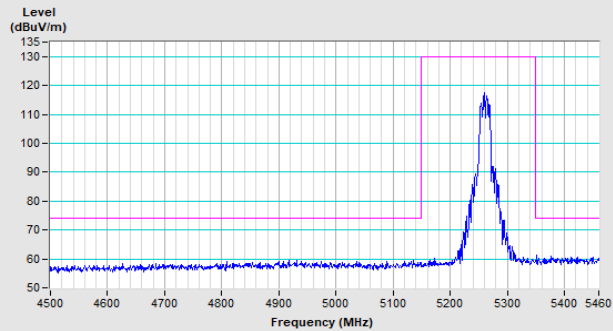


Horizontal (Peak)

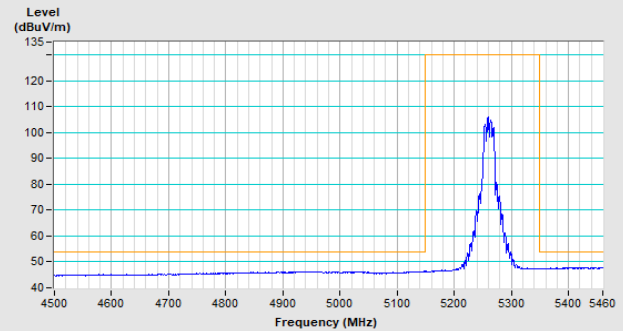

Horizontal (Average)

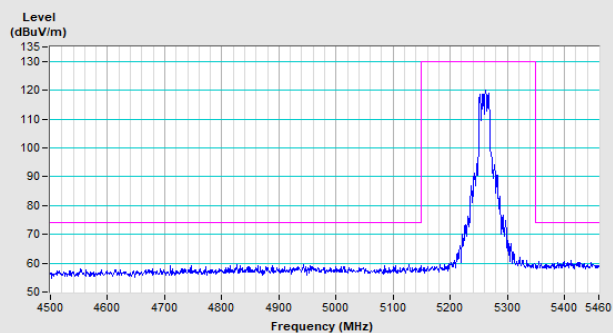


Vertical (Peak)

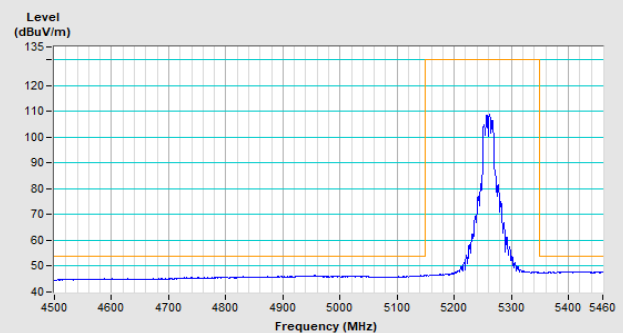


Vertical (Average)


802.11be (EHT20) Channel 64

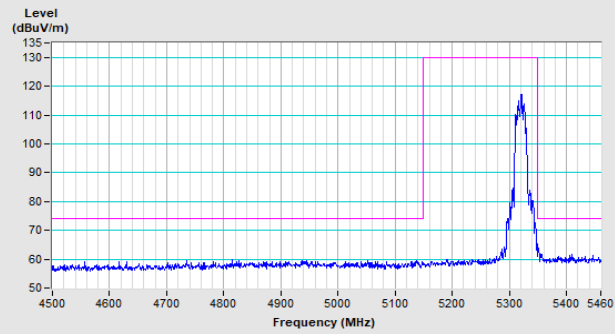


Horizontal (Peak)

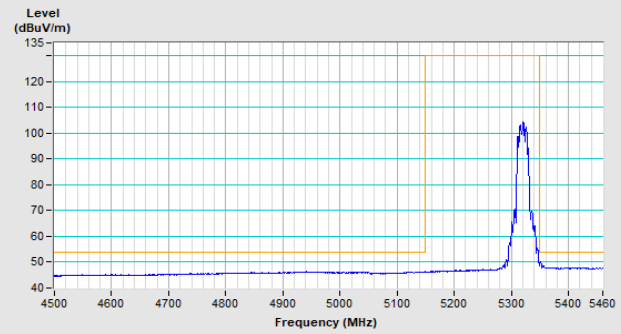

Horizontal (Average)

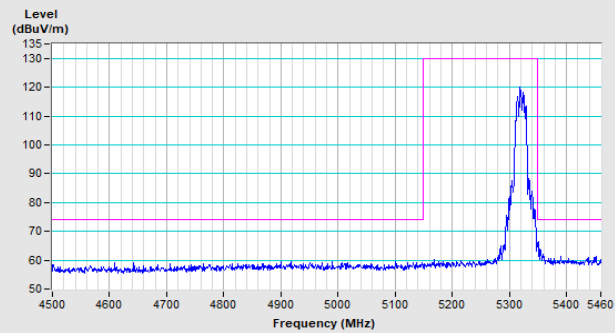


Vertical (Peak)

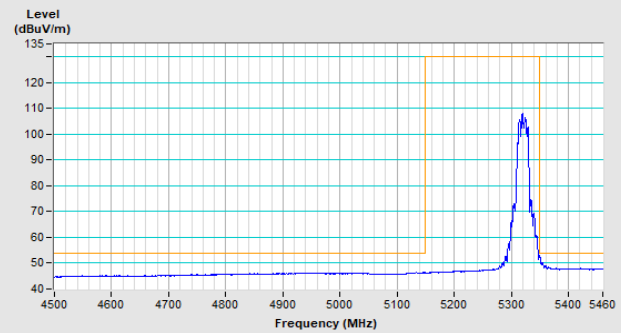


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

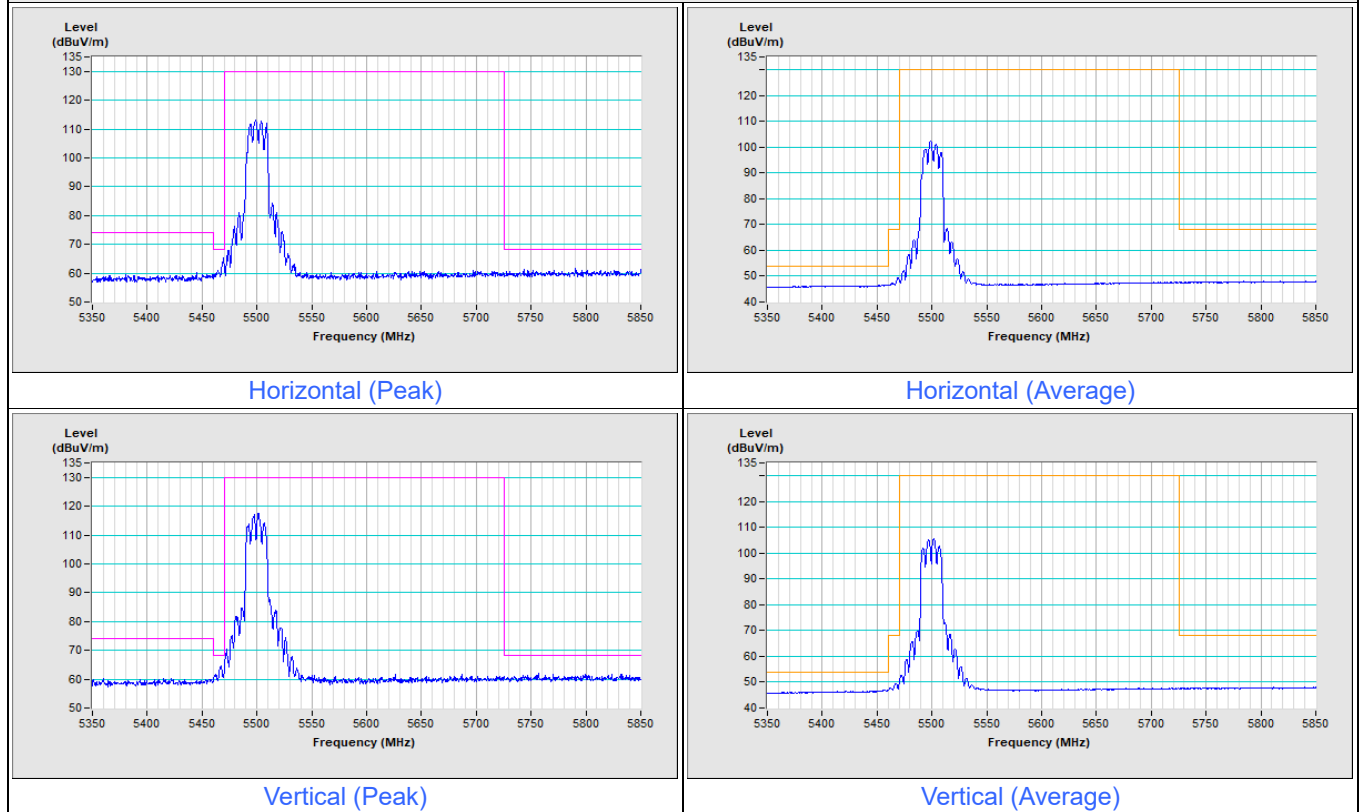

802.11be (EHT20) Channel 140

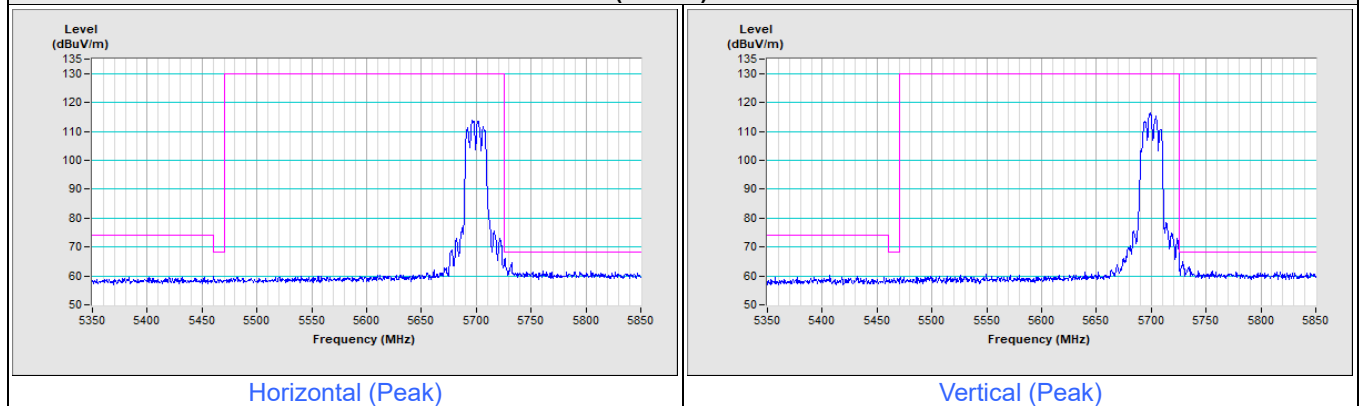


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

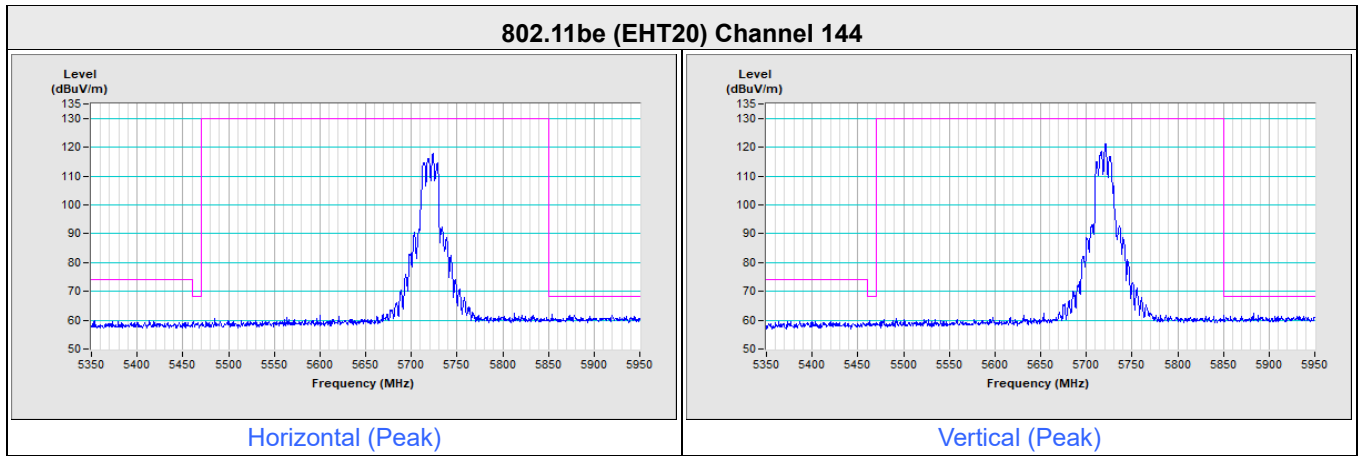


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 149

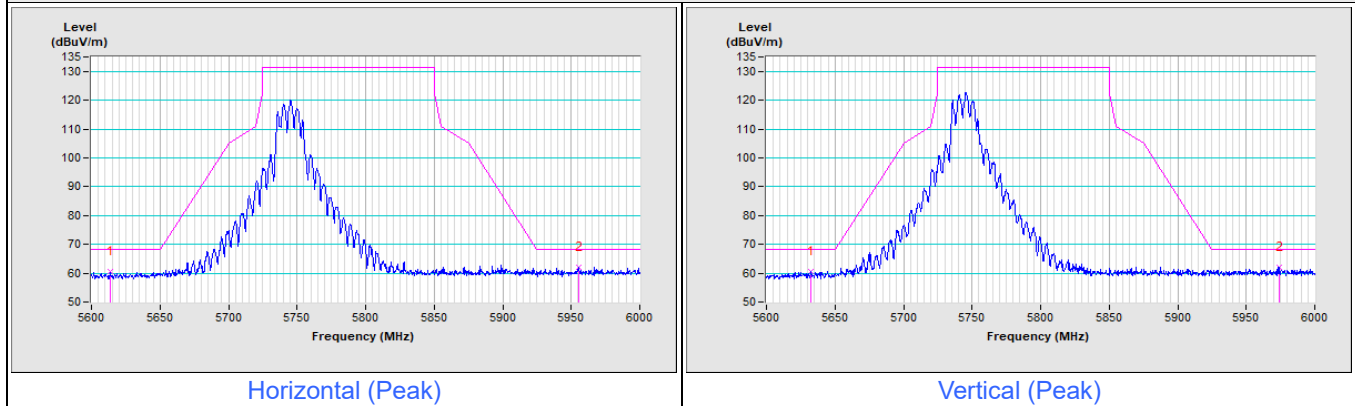


802.11be (EHT20) Channel 157

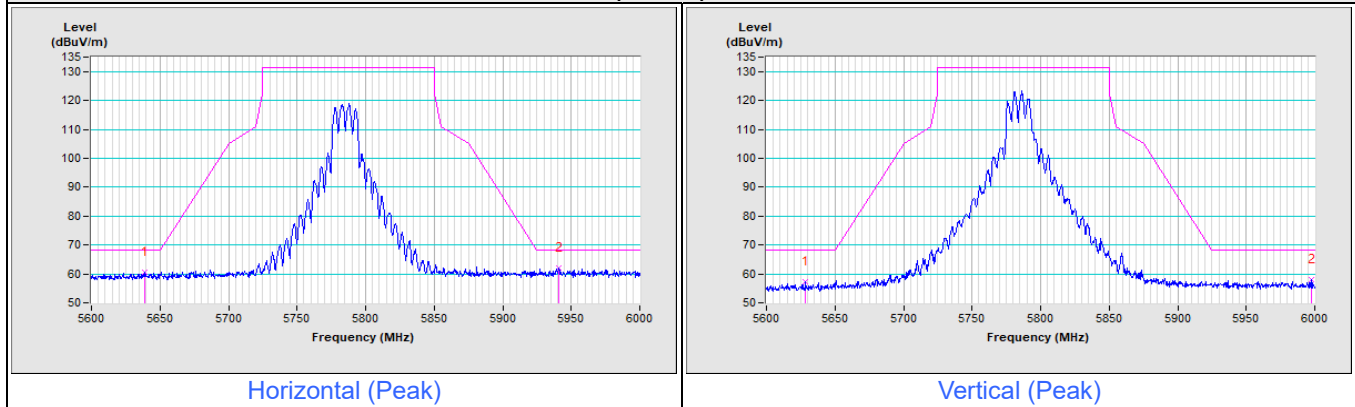


802.11be (EHT20) Channel 165

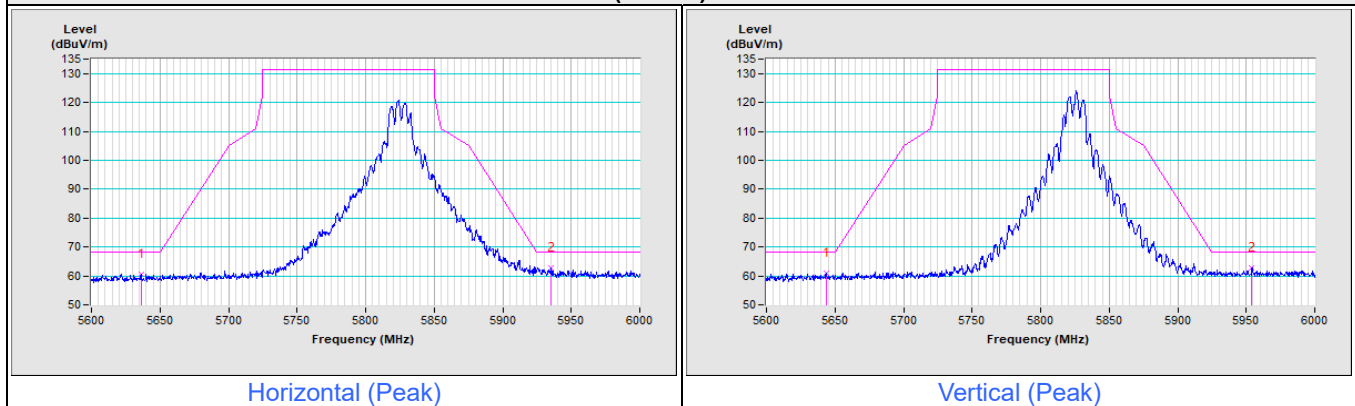


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

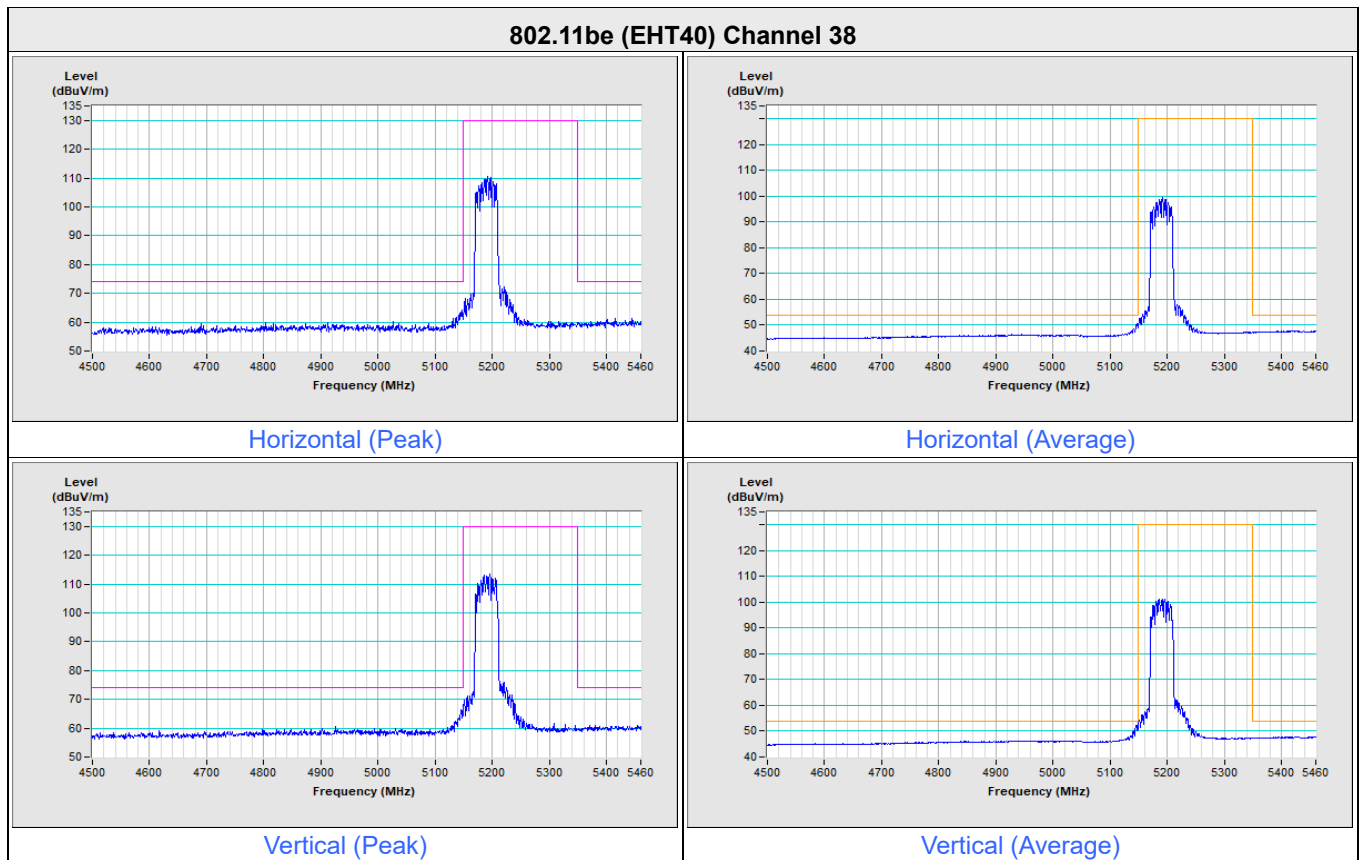


802.11be (EHT40) Channel 46

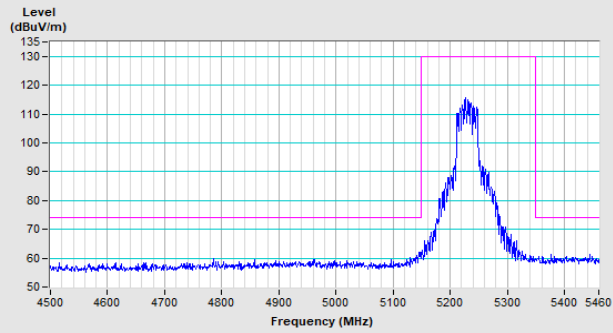


Horizontal (Peak)

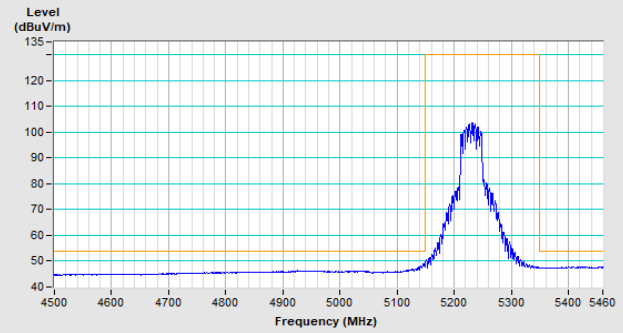

Horizontal (Average)

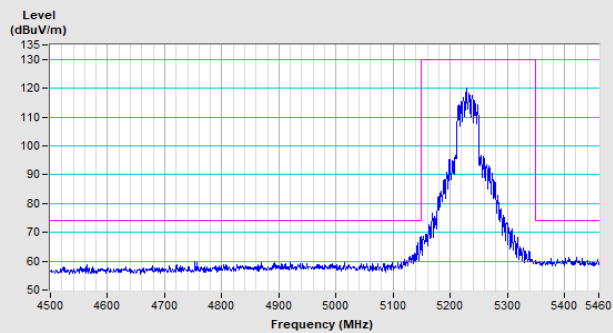


Vertical (Peak)

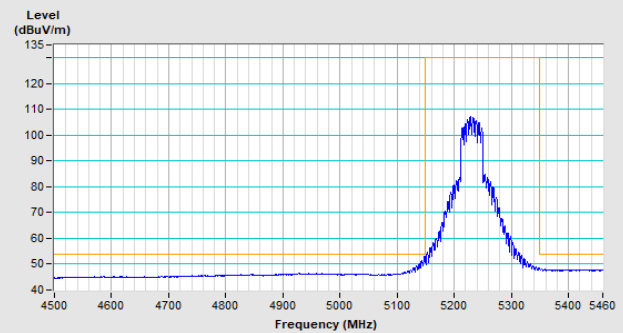


Vertical (Average)


802.11be (EHT40) Channel 54

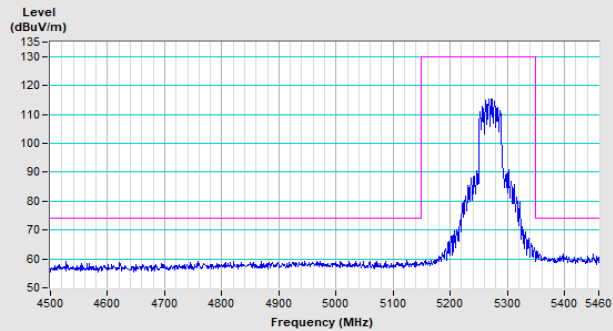


Horizontal (Peak)

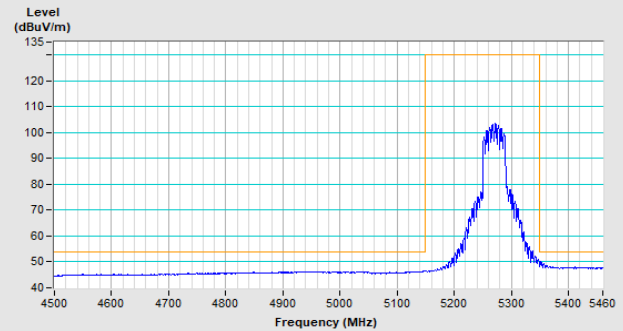

Horizontal (Average)

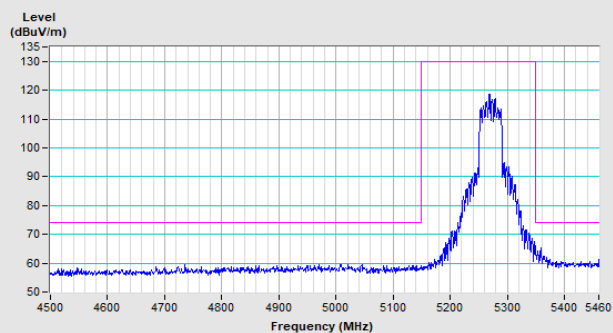


Vertical (Peak)

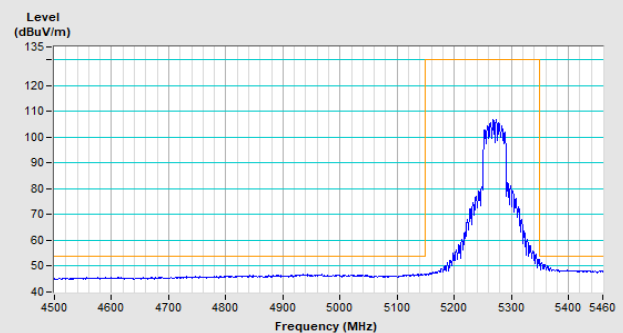


Vertical (Average)


802.11be (EHT40) Channel 62

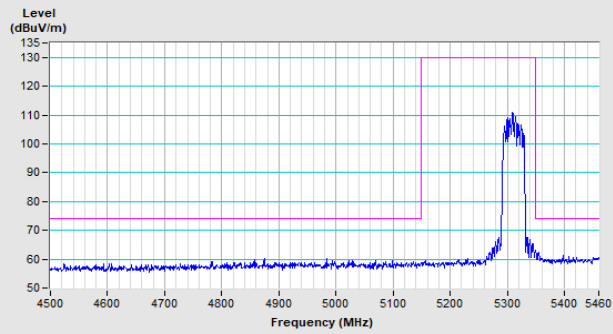


Horizontal (Peak)

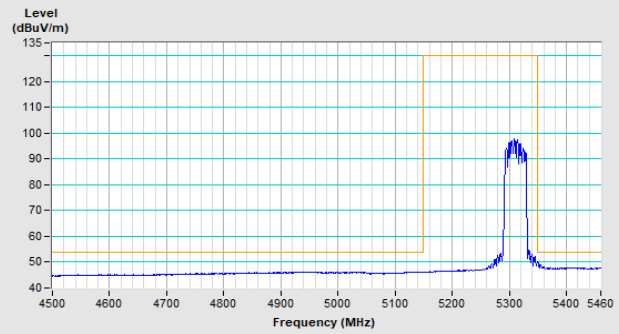

Horizontal (Average)

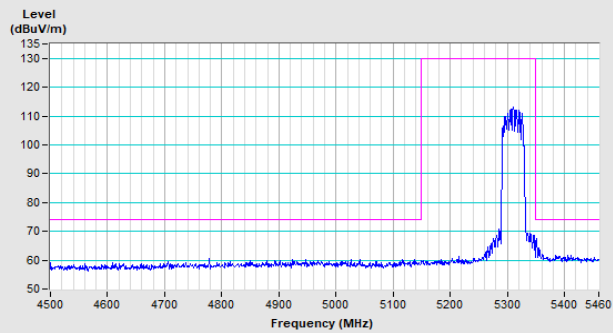


Vertical (Peak)

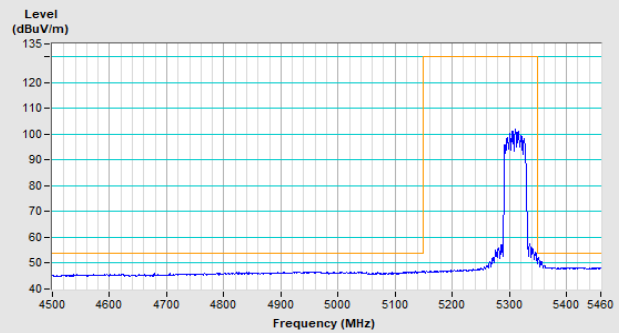


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 102

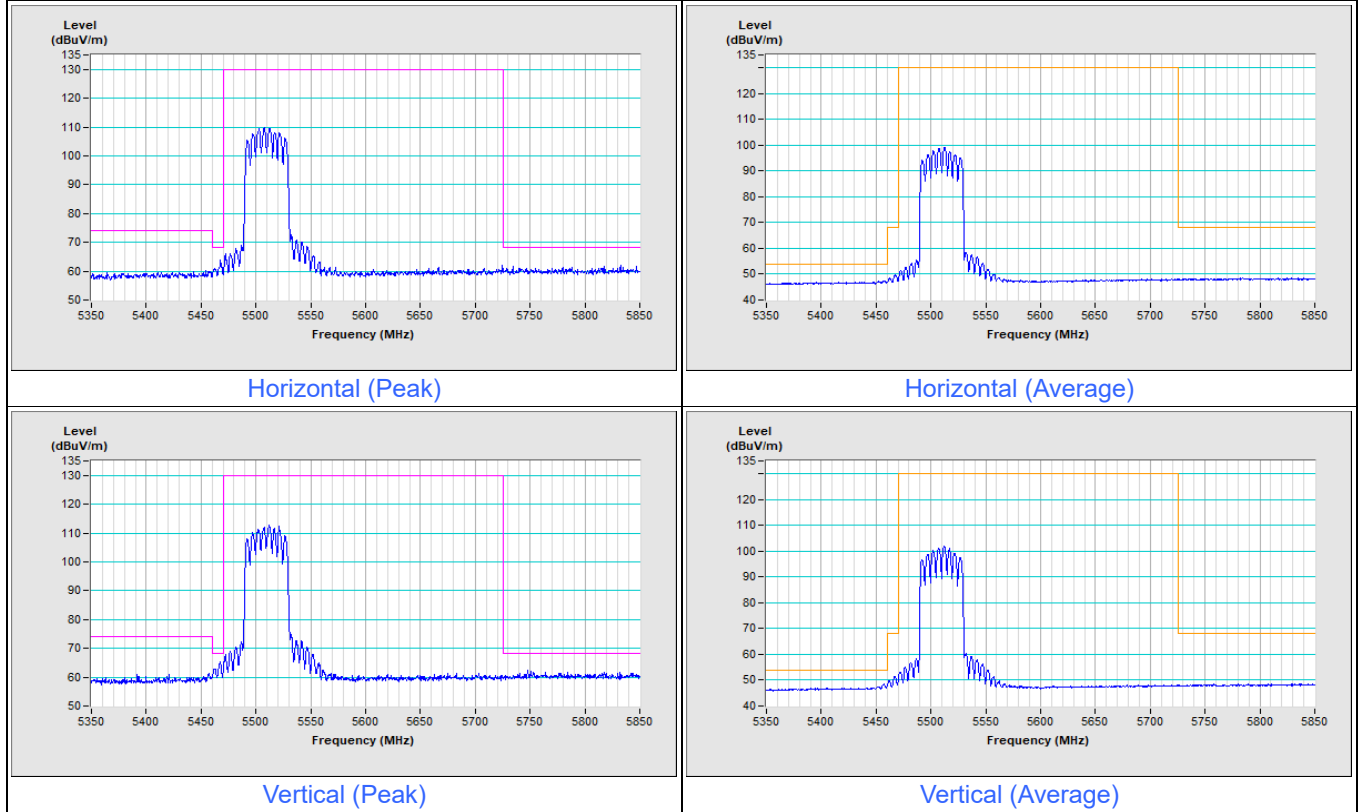



802.11be (EHT40) Channel 134

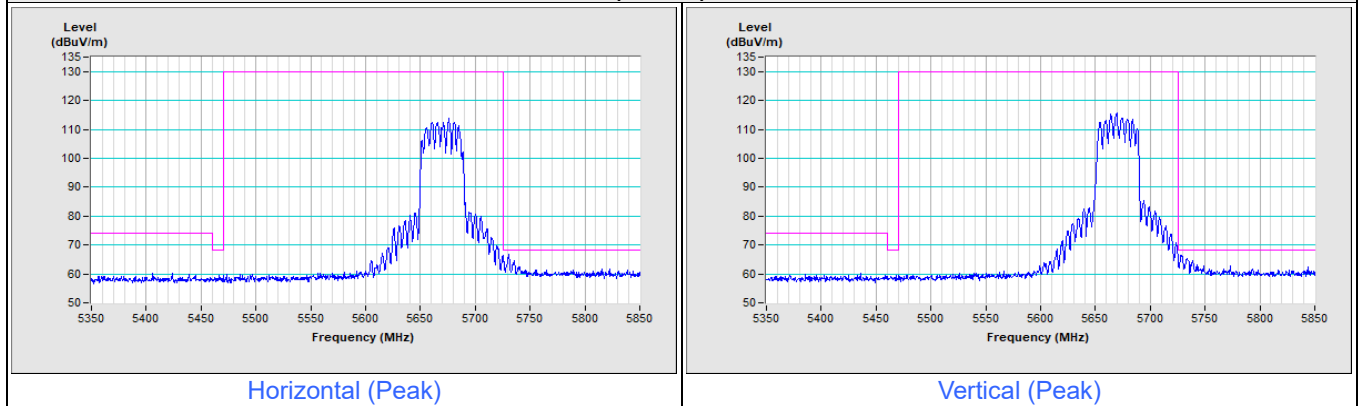

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

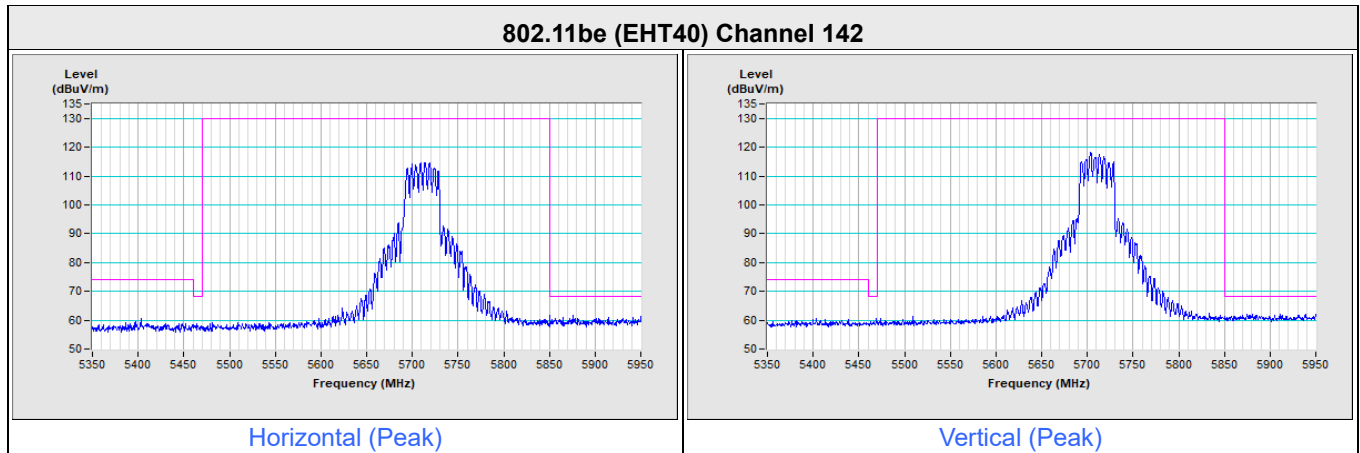


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

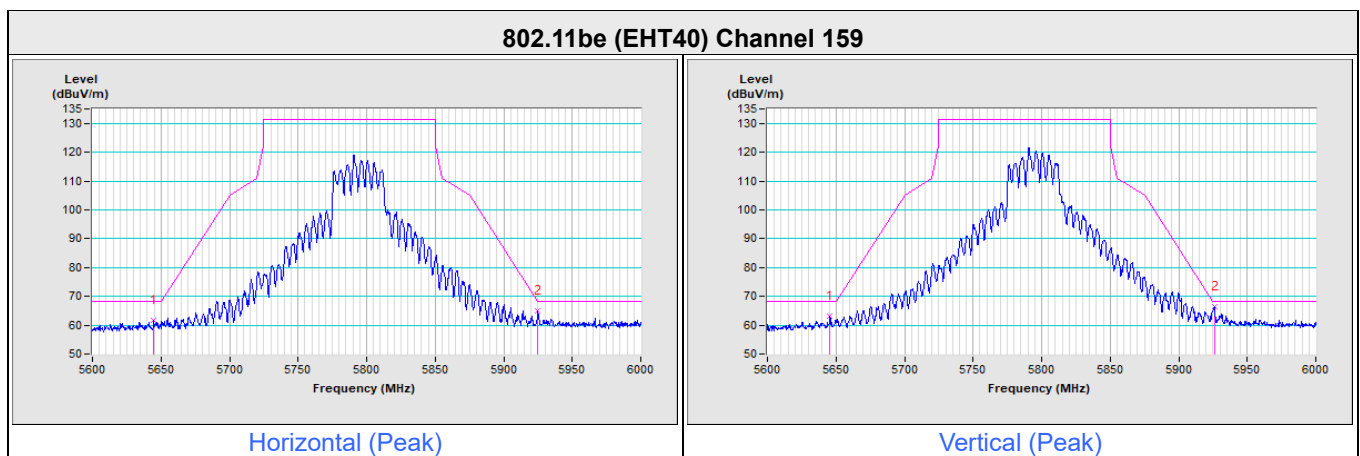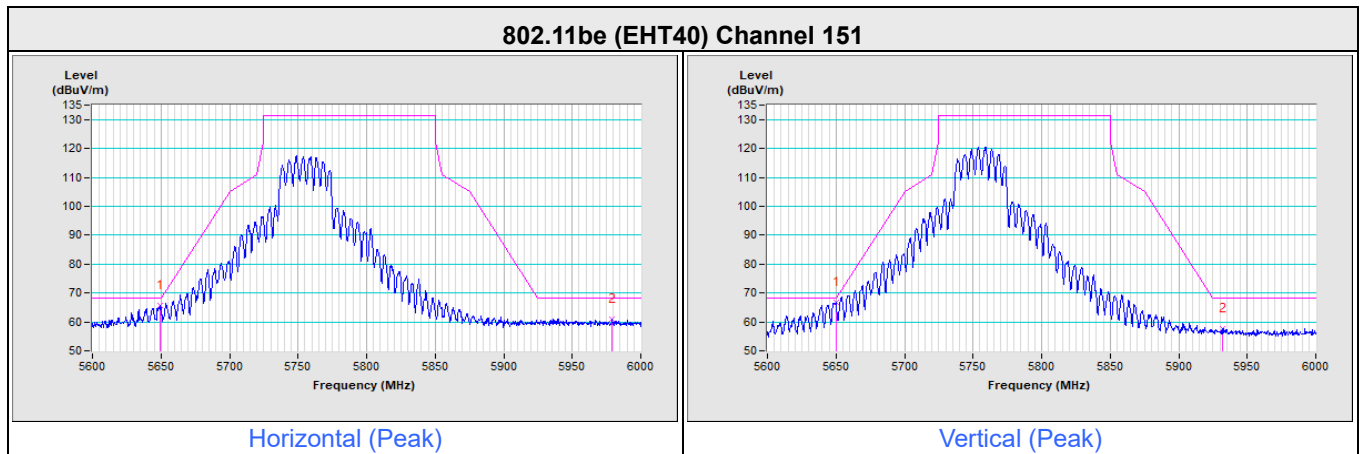


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

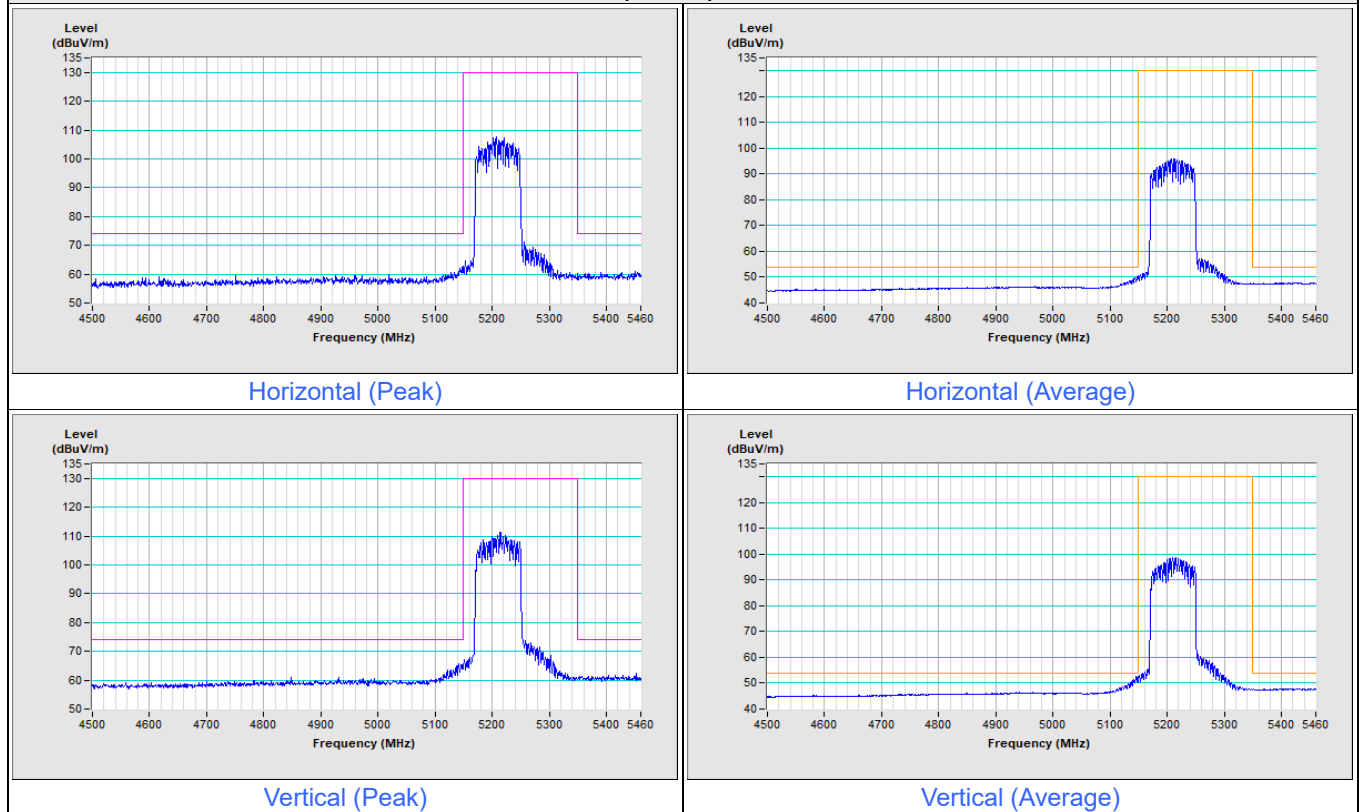


802.11be (EHT80) Channel 58

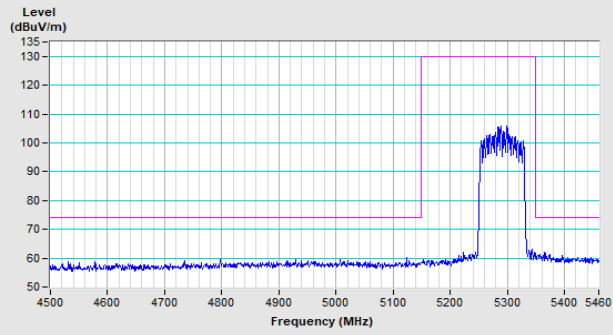


Horizontal (Peak)

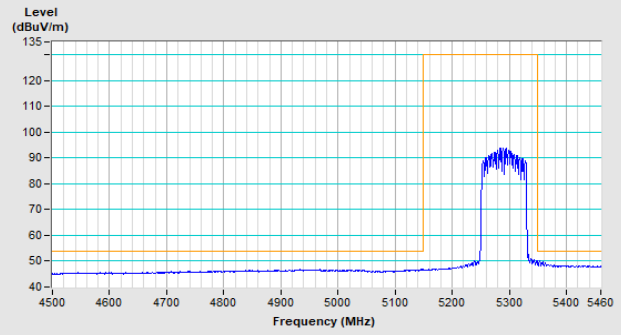

Horizontal (Average)

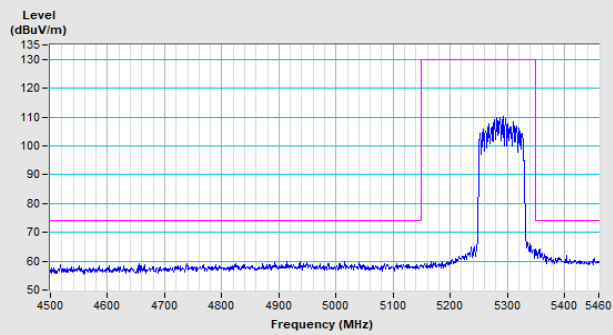


Vertical (Peak)

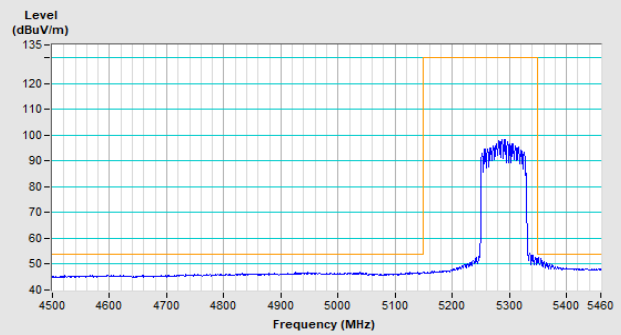


Vertical (Average)


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

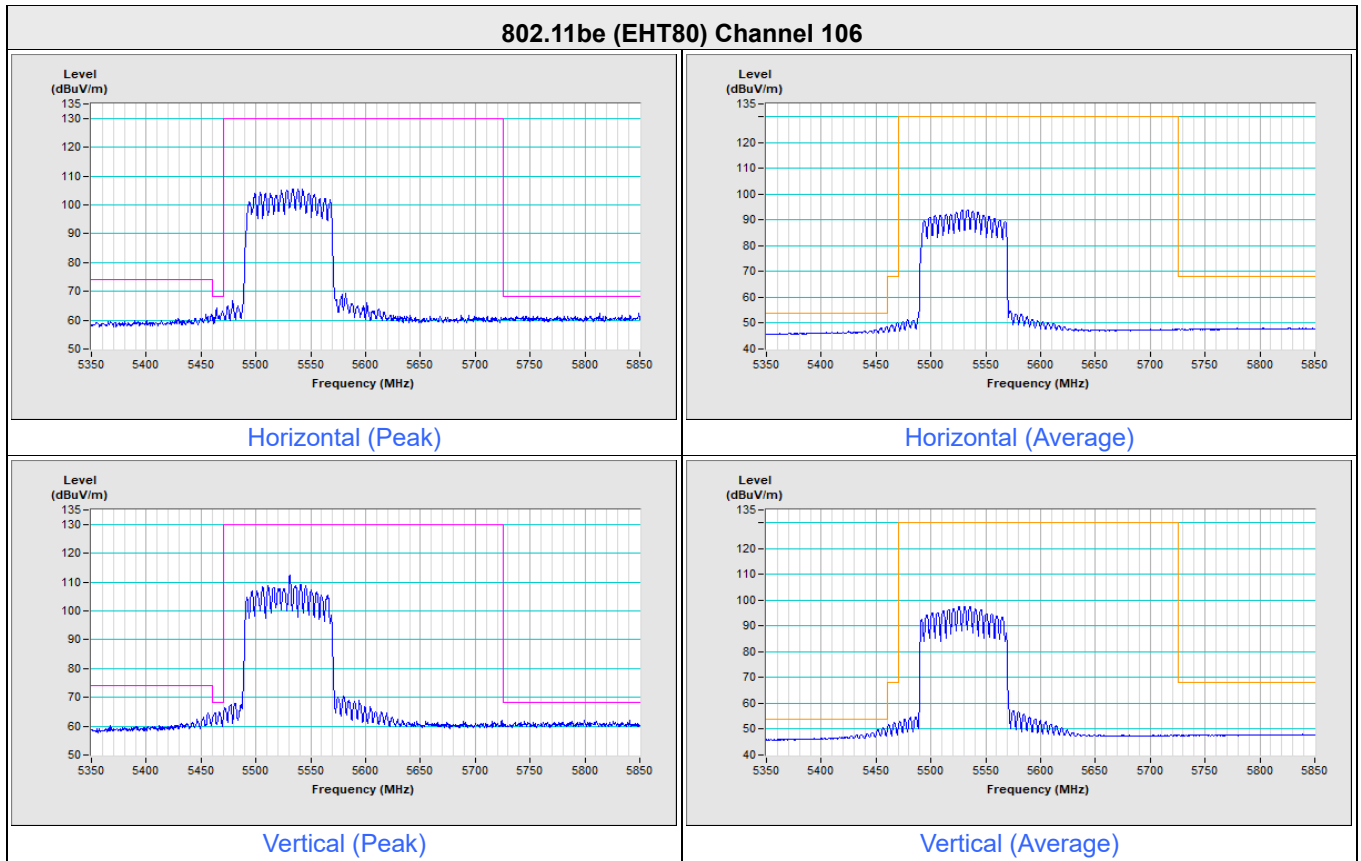


802.11be (EHT80) Channel 122

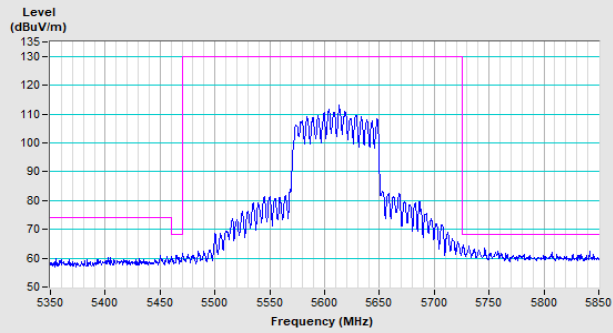


Horizontal (Peak)

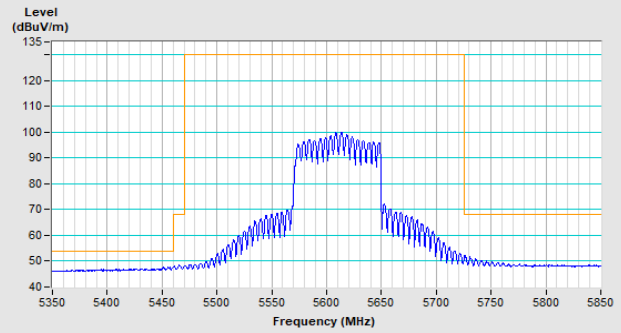

Horizontal (Average)

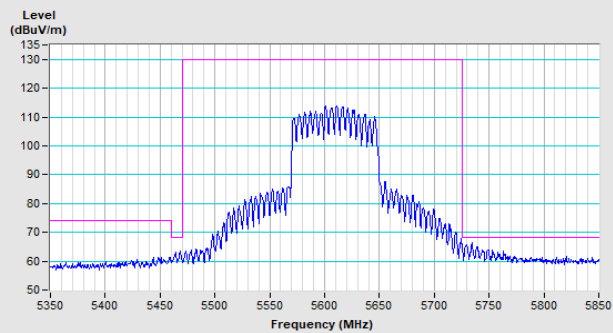


Vertical (Peak)

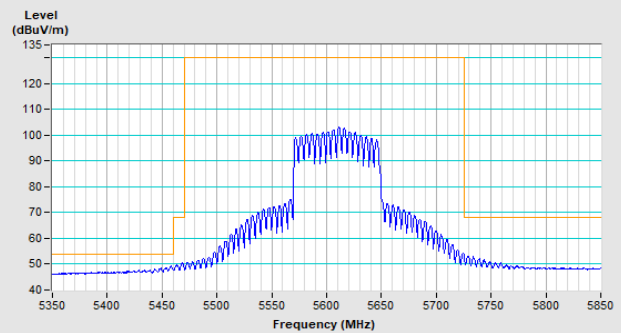


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) Channel 138

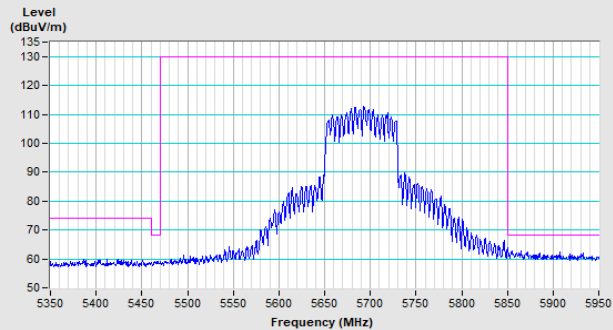


Horizontal (Peak)

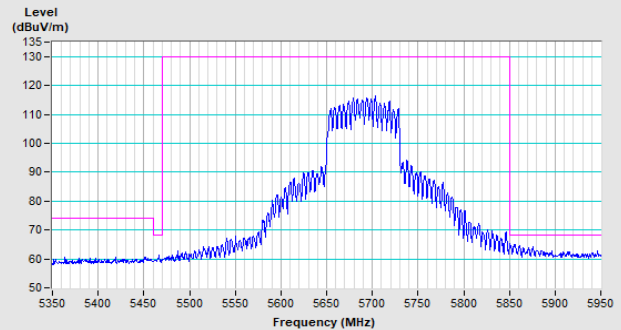


Vertical (Peak)

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

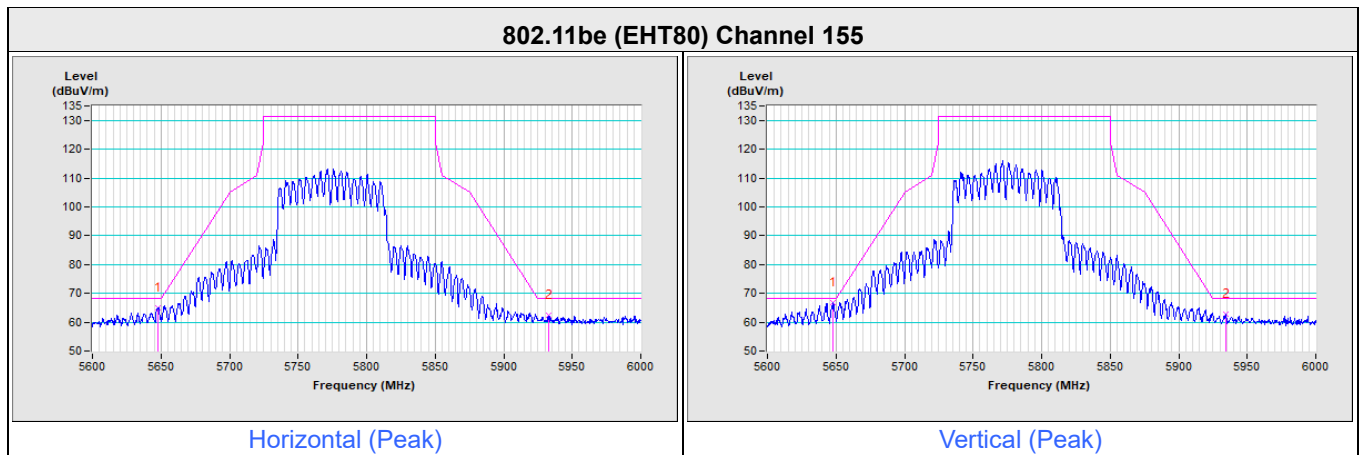


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

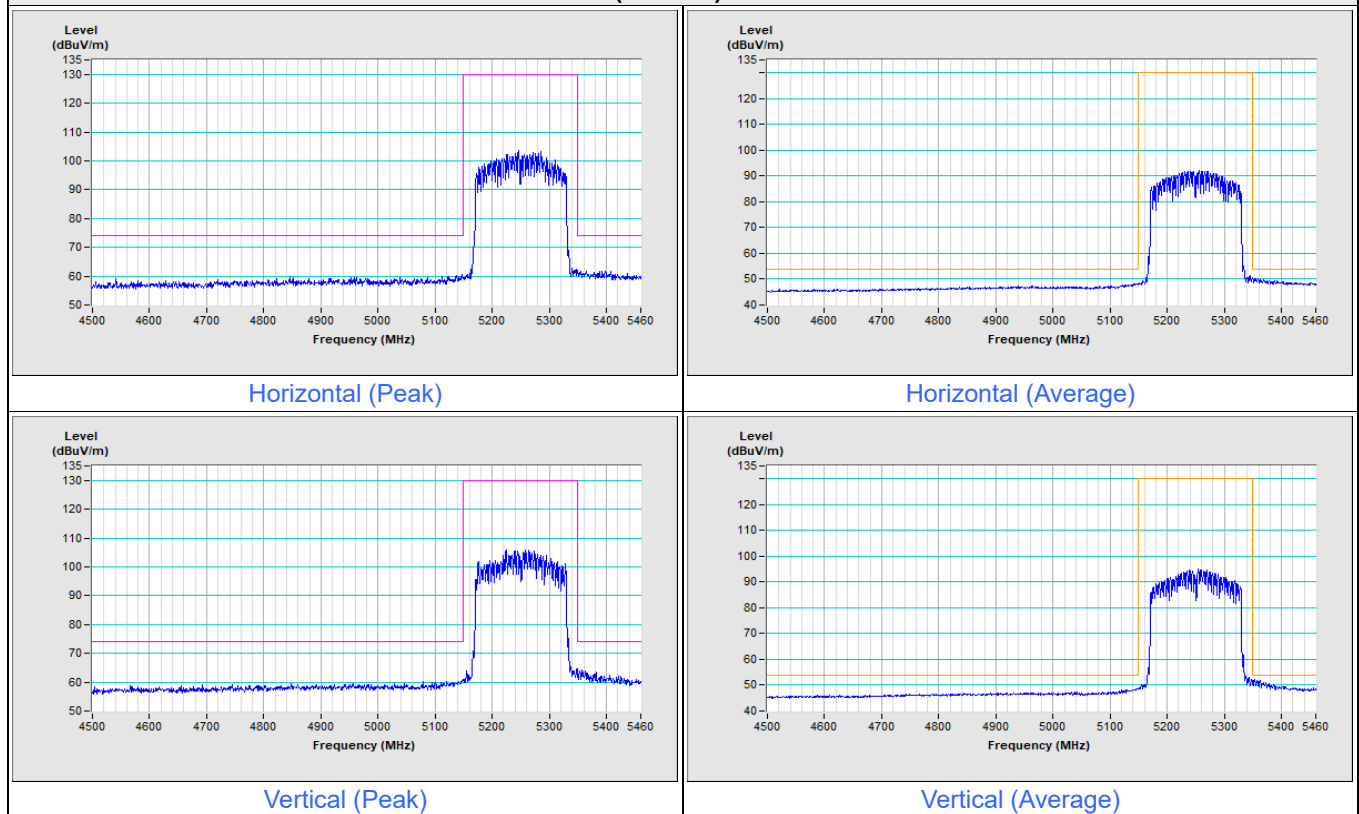


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

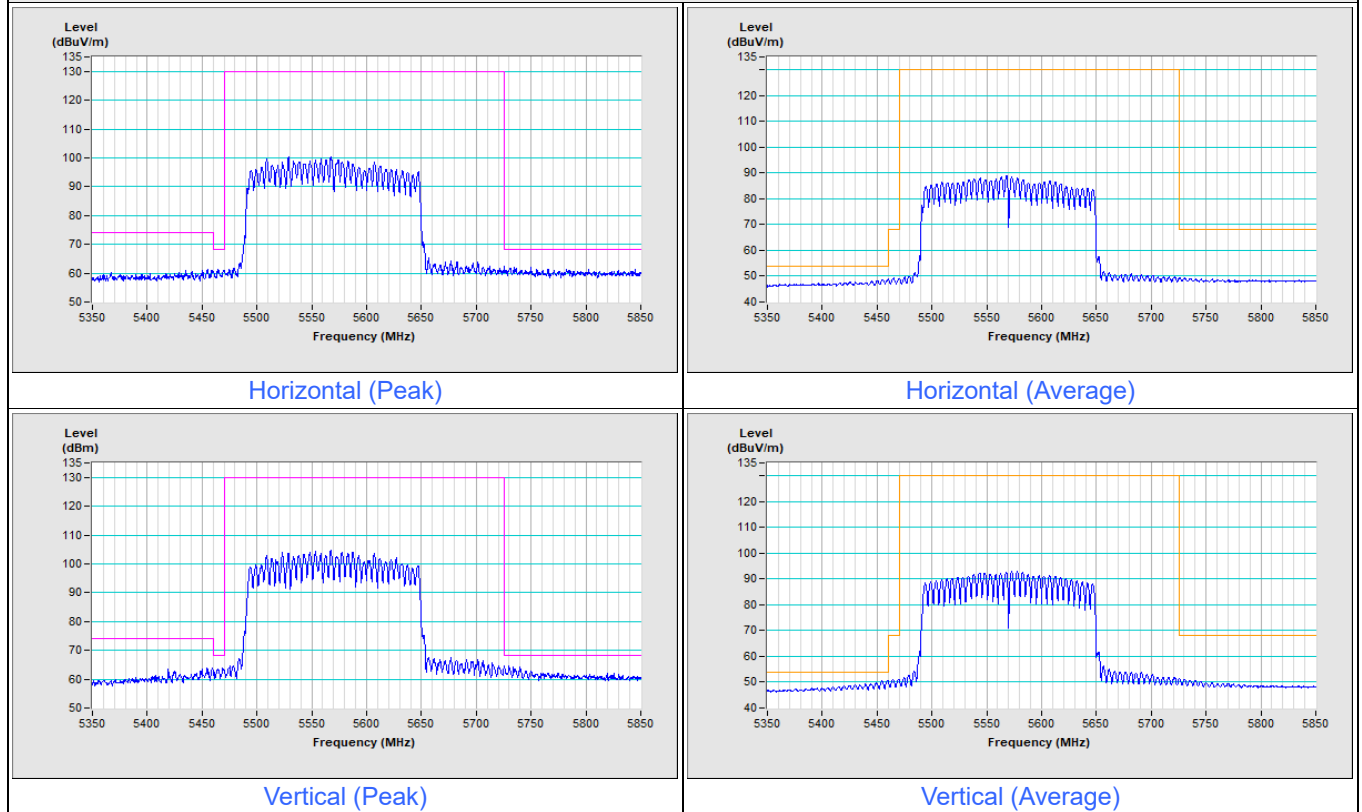


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 36

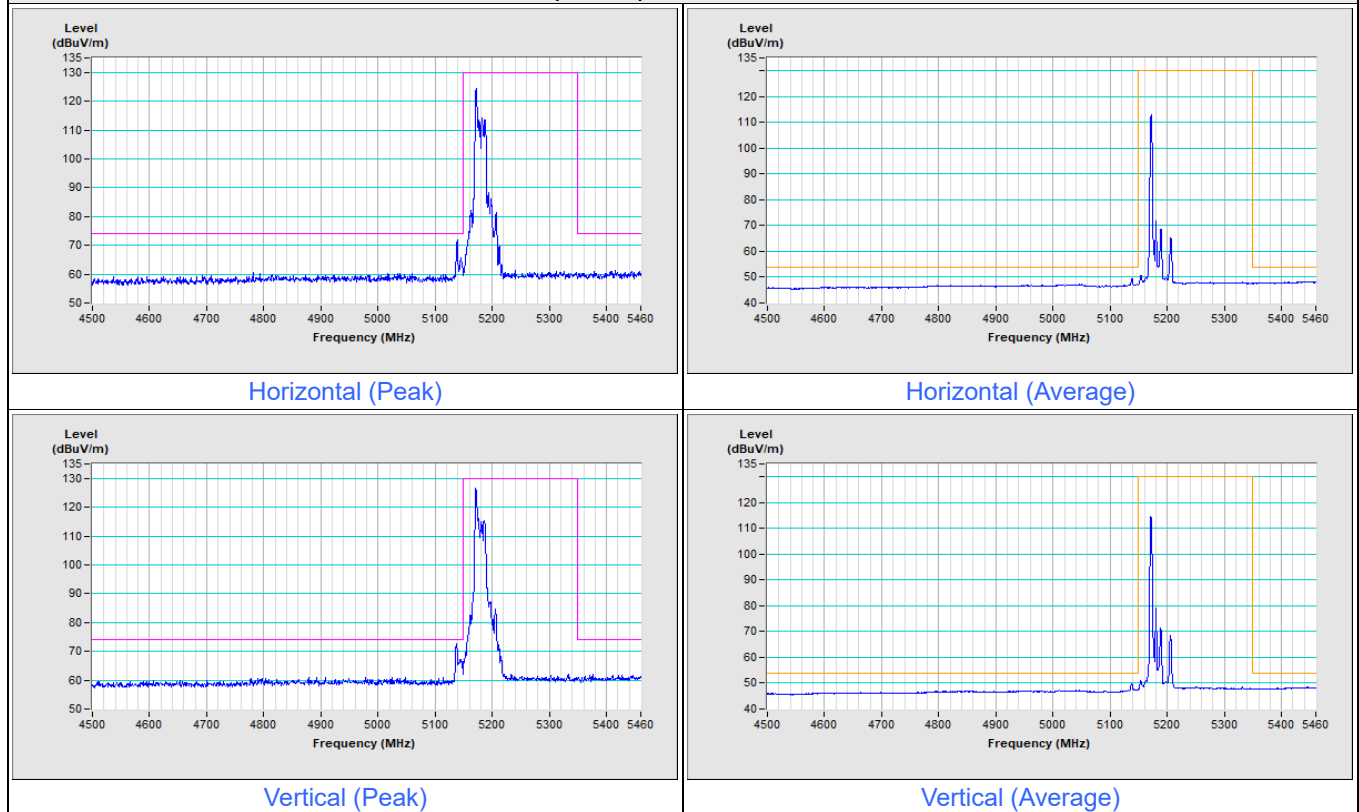


802.11be (EHT20) 26-tone RU Channel 48

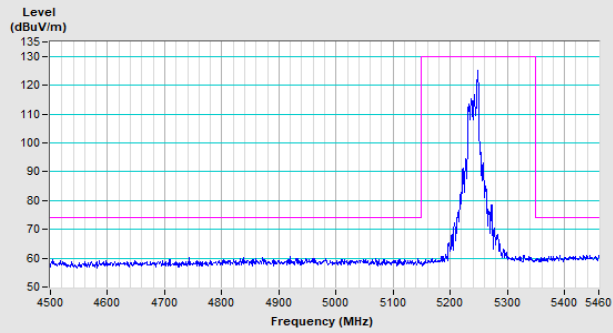


Horizontal (Peak)

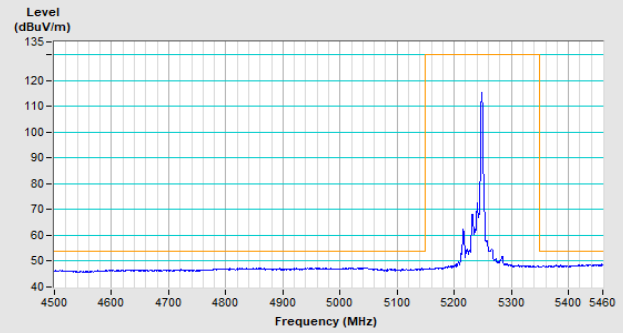

Horizontal (Average)

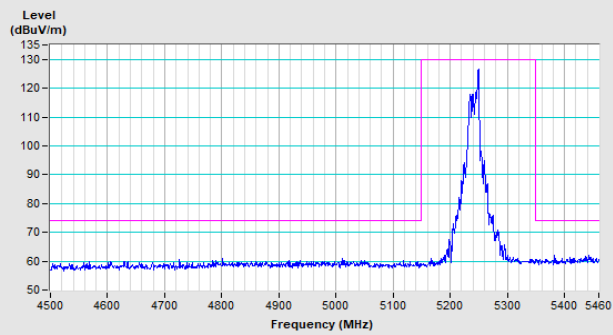


Vertical (Peak)

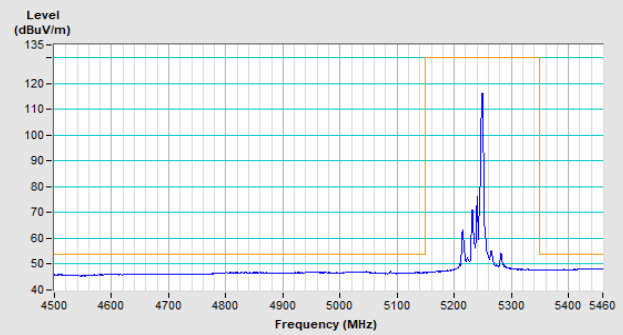


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 52

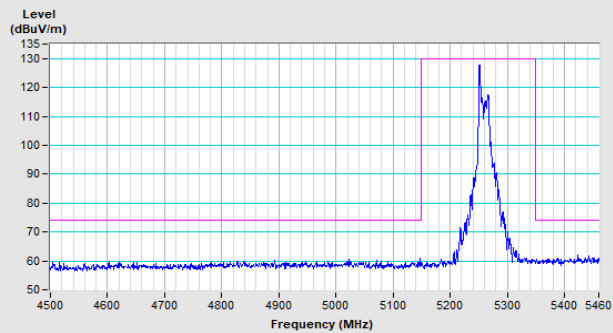


Horizontal (Peak)

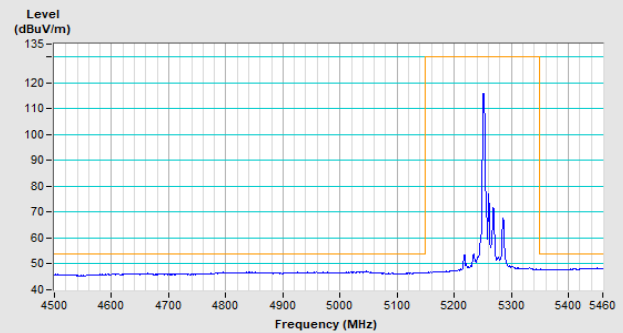

Horizontal (Average)

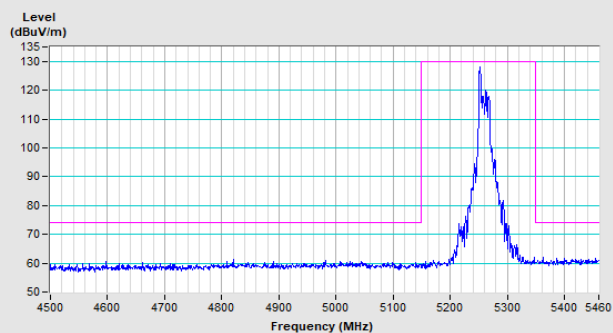


Vertical (Peak)

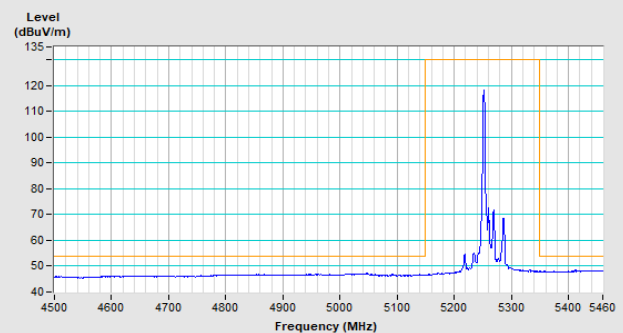


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 64

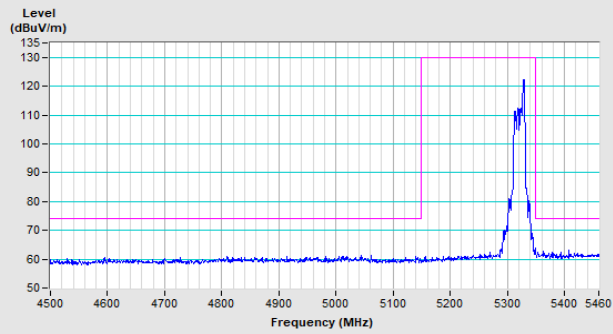


Horizontal (Peak)

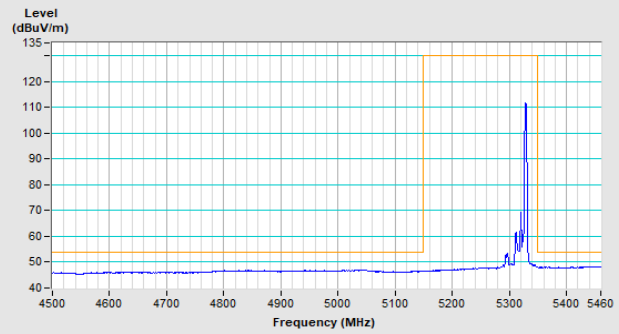

Horizontal (Average)

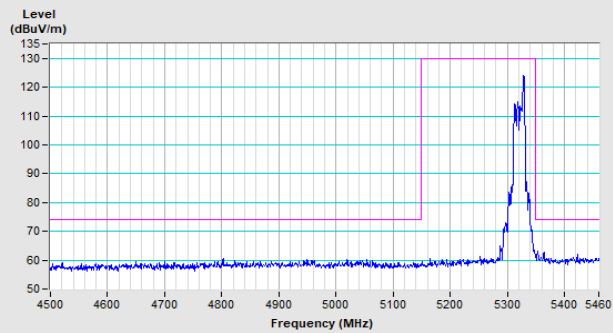


Vertical (Peak)

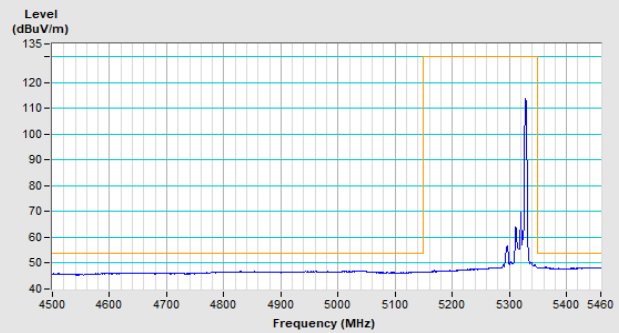


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 100

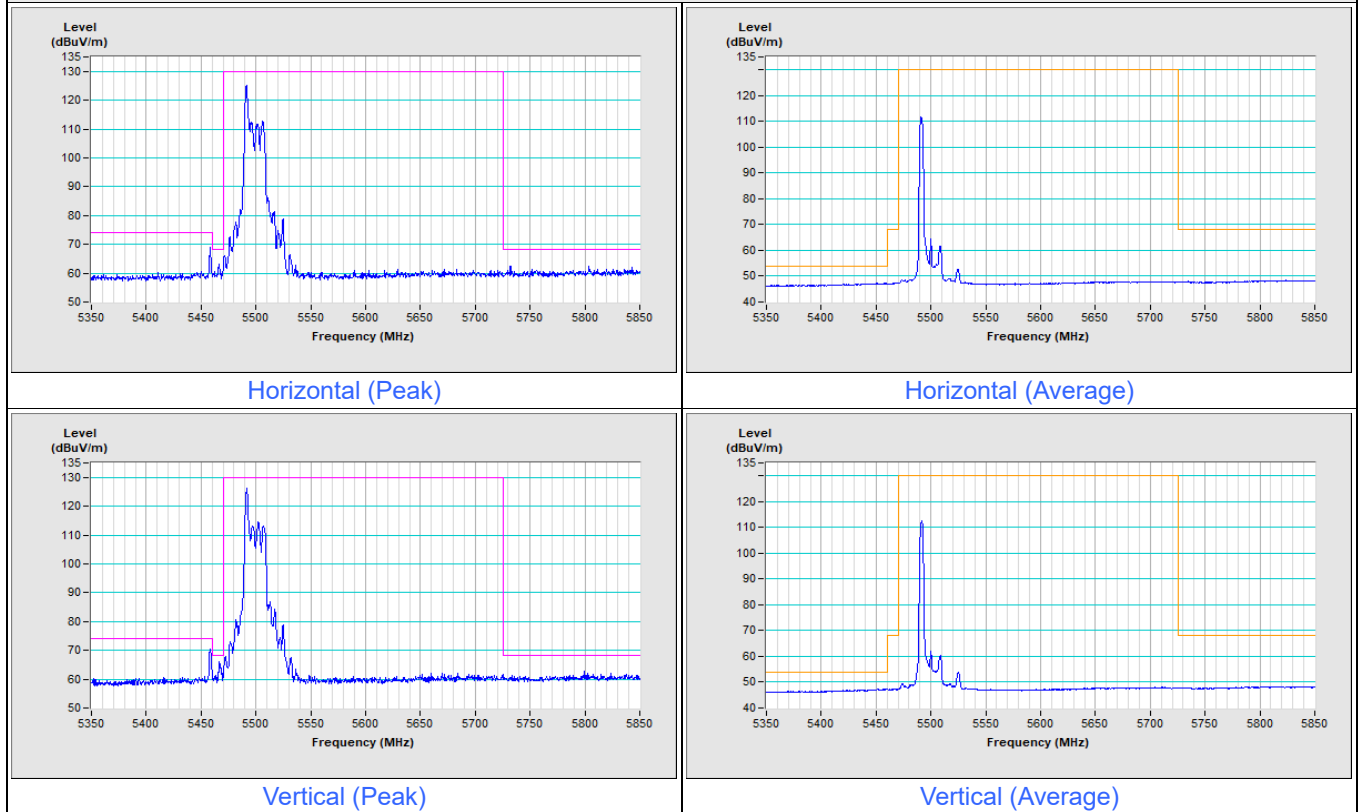

802.11be (EHT20) 26-tone RU Channel 140

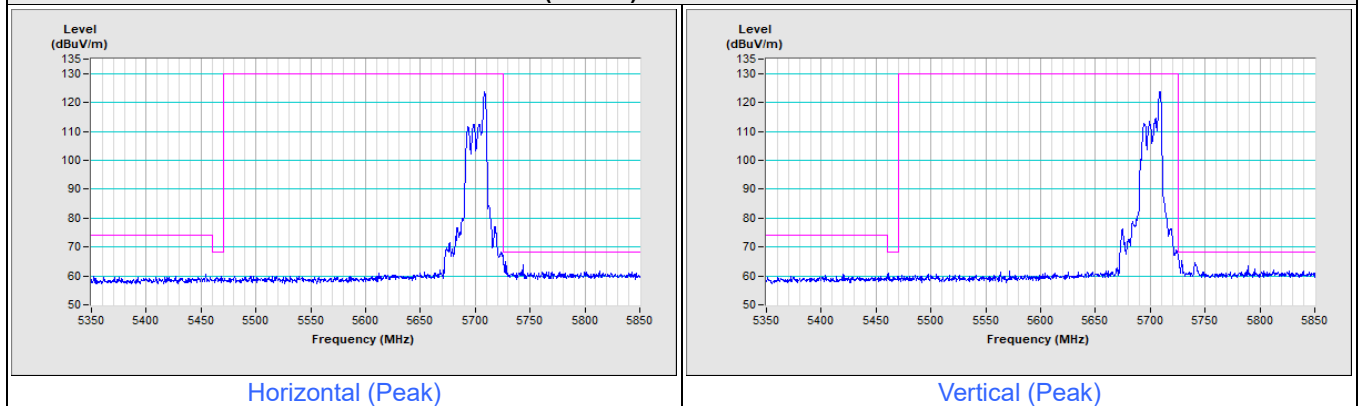


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

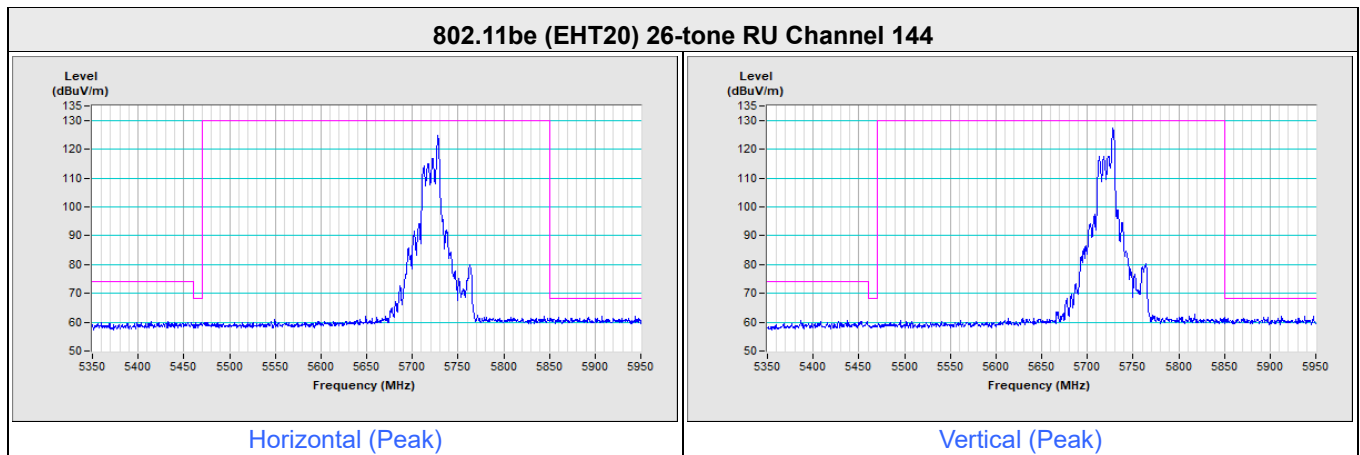


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 26-tone RU Channel 149

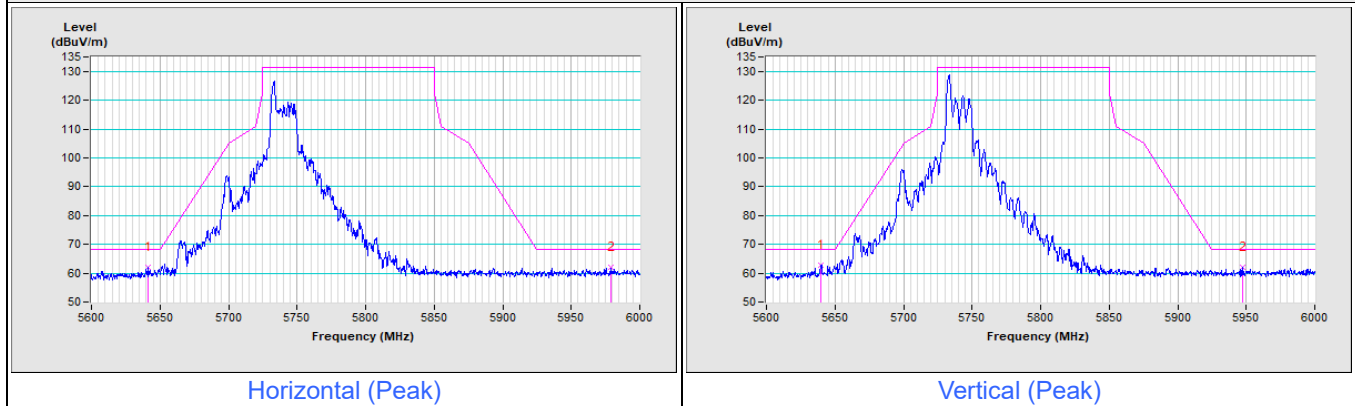

802.11be (EHT20) 26-tone RU Channel 157

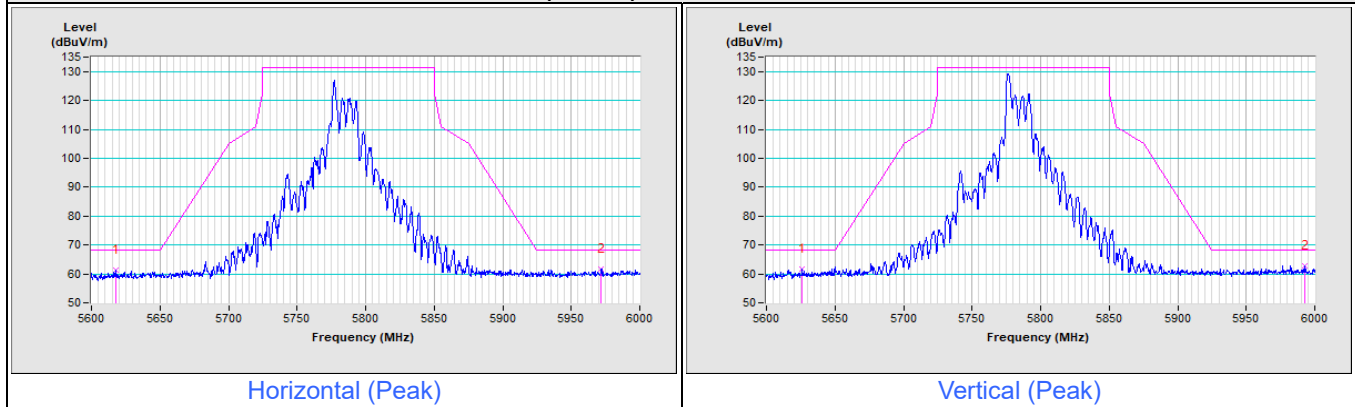


802.11be (EHT20) 26-tone RU Channel 165

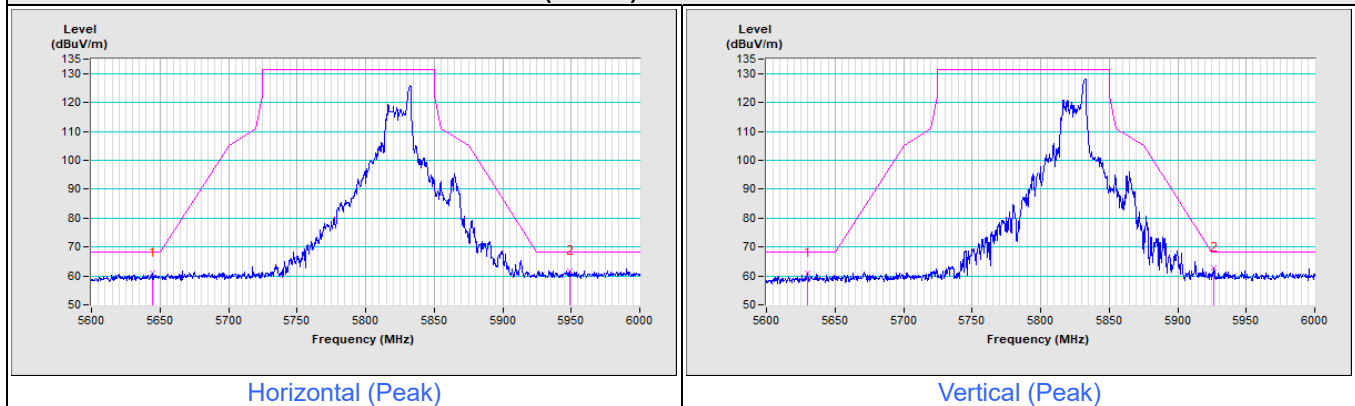


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 36

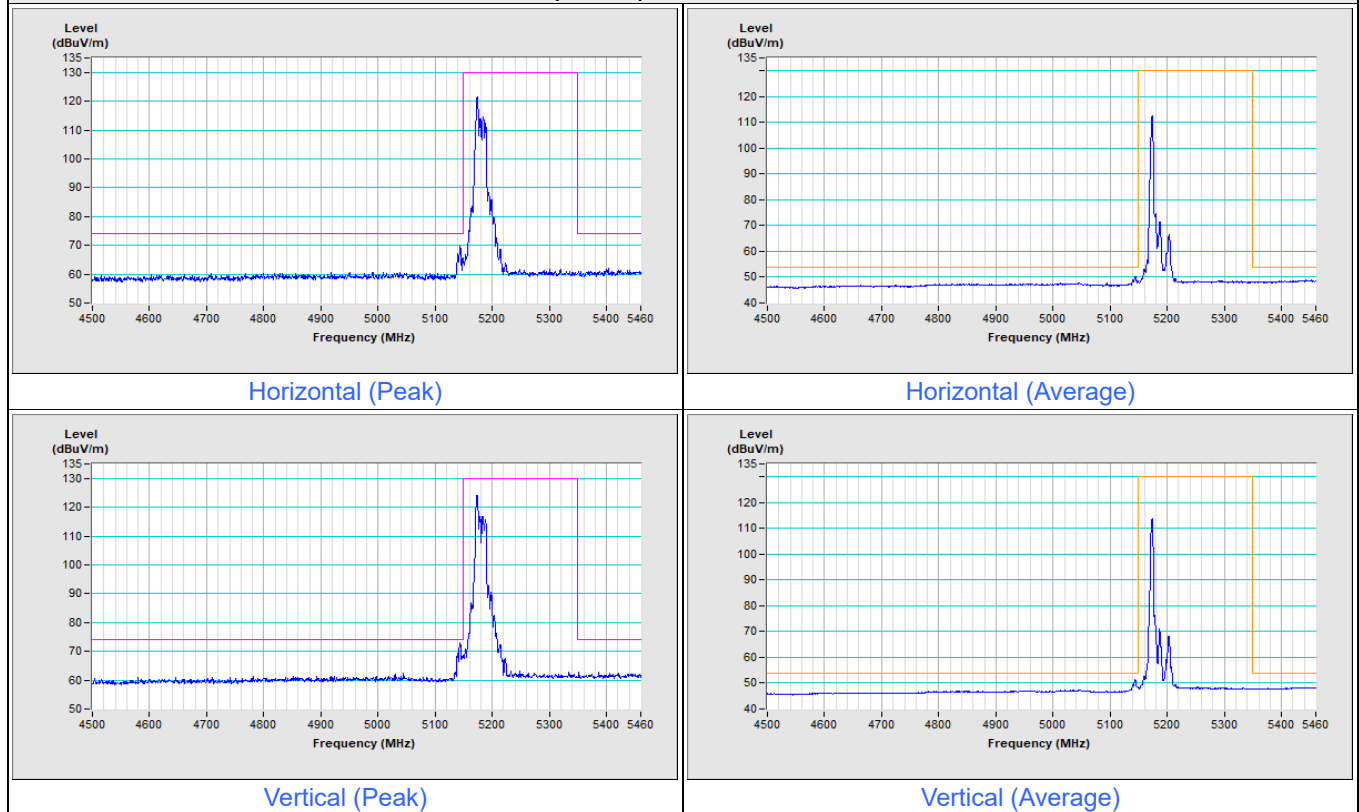


802.11be (EHT20) 52-tone RU Channel 48

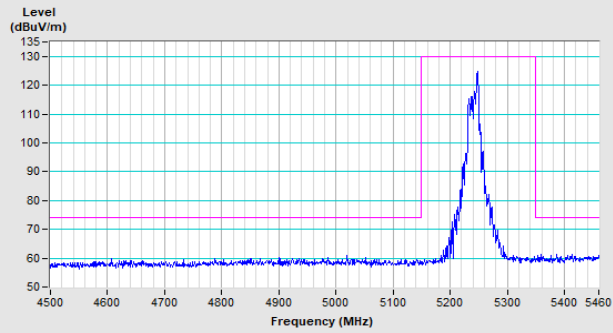


Horizontal (Peak)

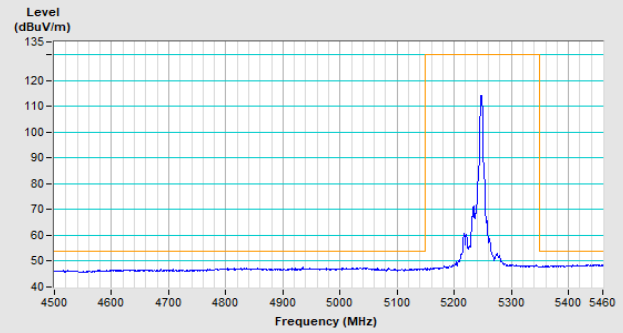

Horizontal (Average)

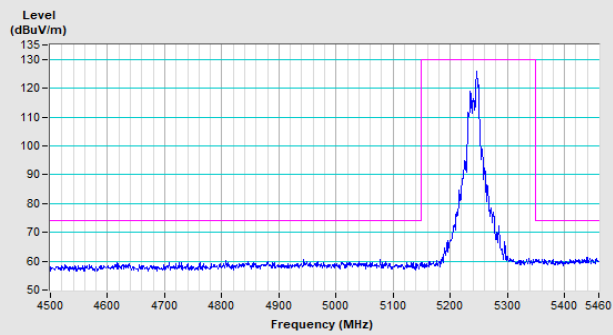


Vertical (Peak)

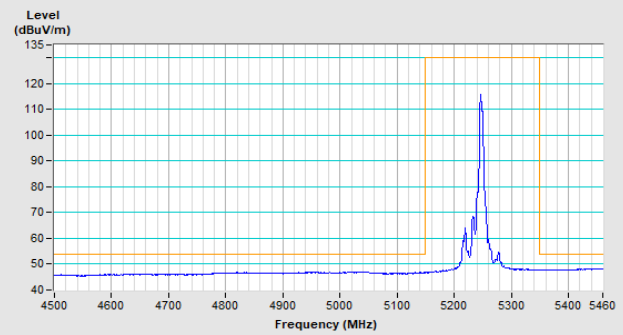


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 52

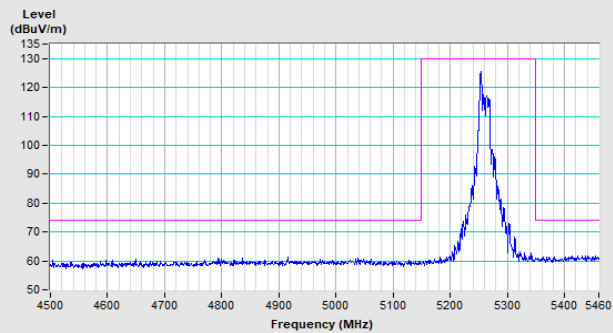


Horizontal (Peak)

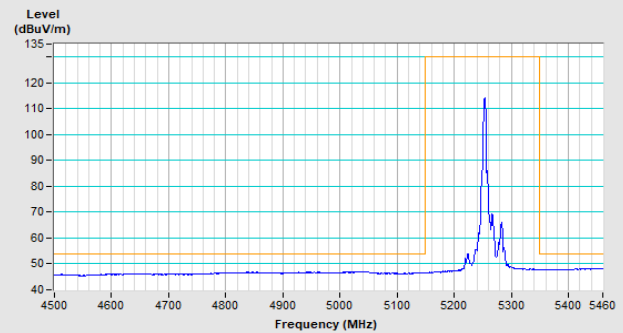

Horizontal (Average)

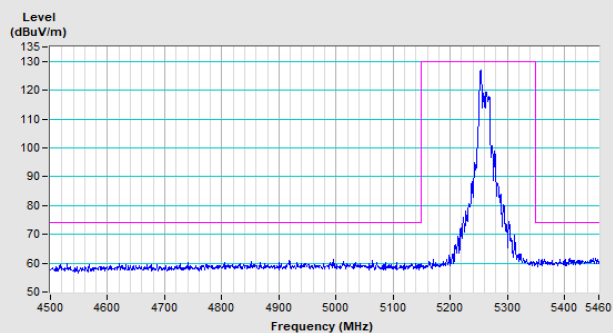


Vertical (Peak)

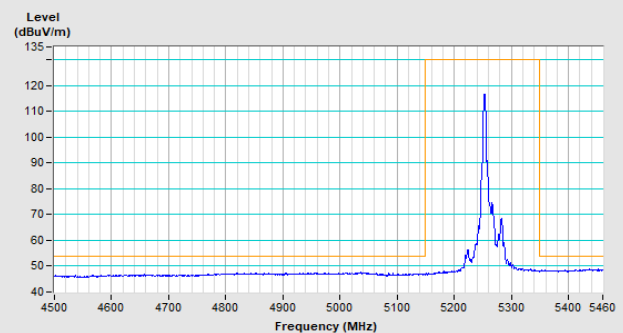


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 64

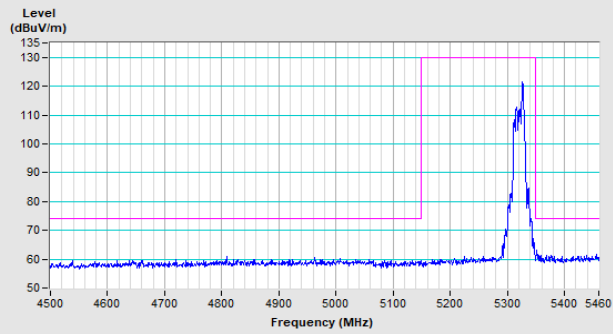


Horizontal (Peak)

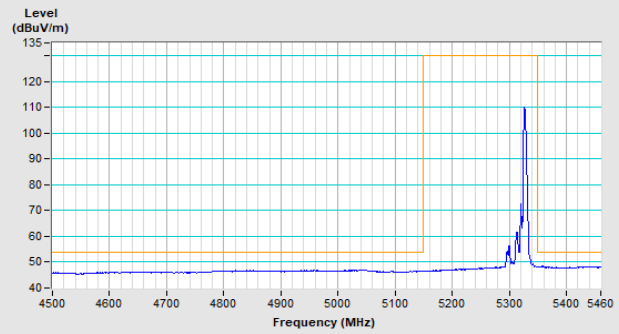

Horizontal (Average)

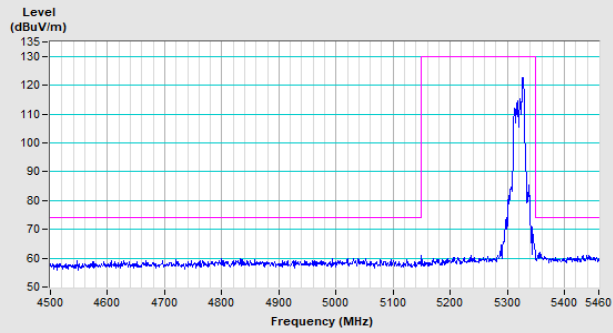


Vertical (Peak)

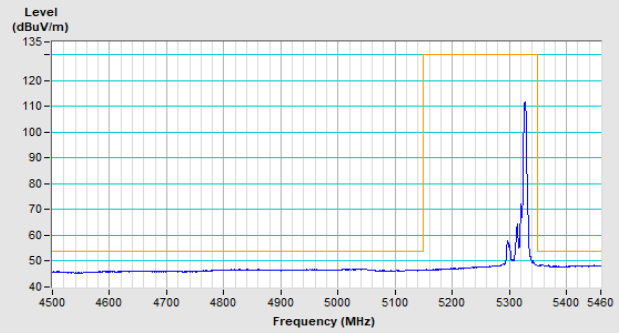


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 100

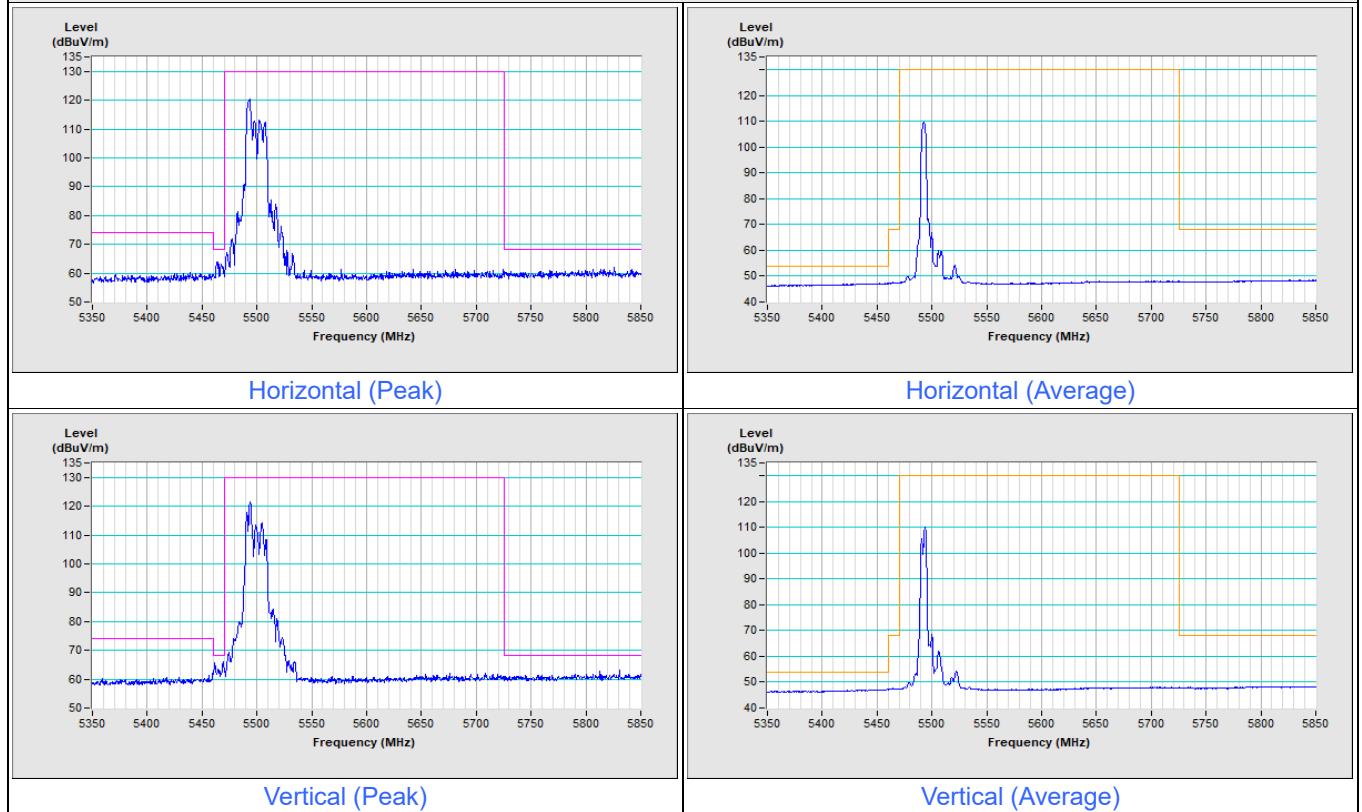

802.11be (EHT20) 52-tone RU Channel 140

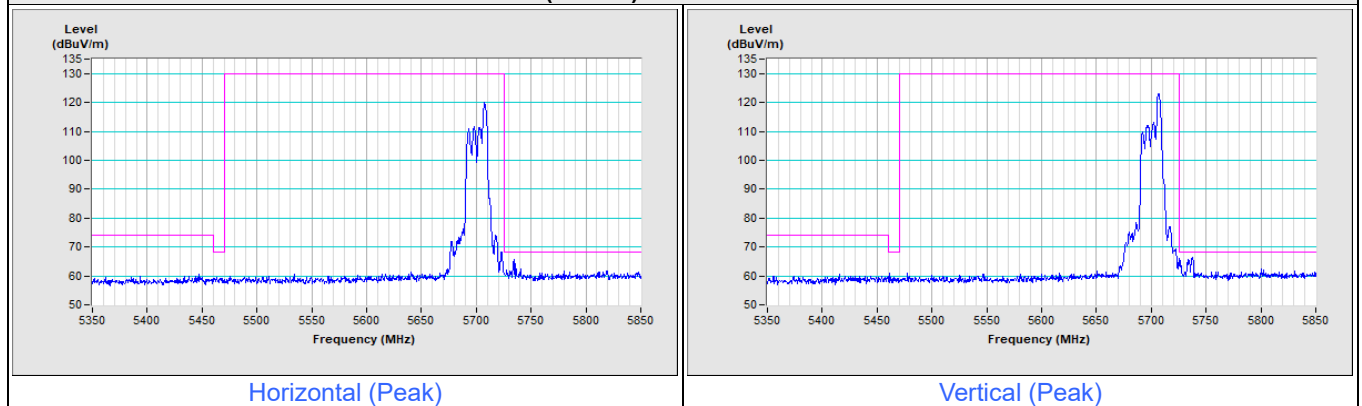


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

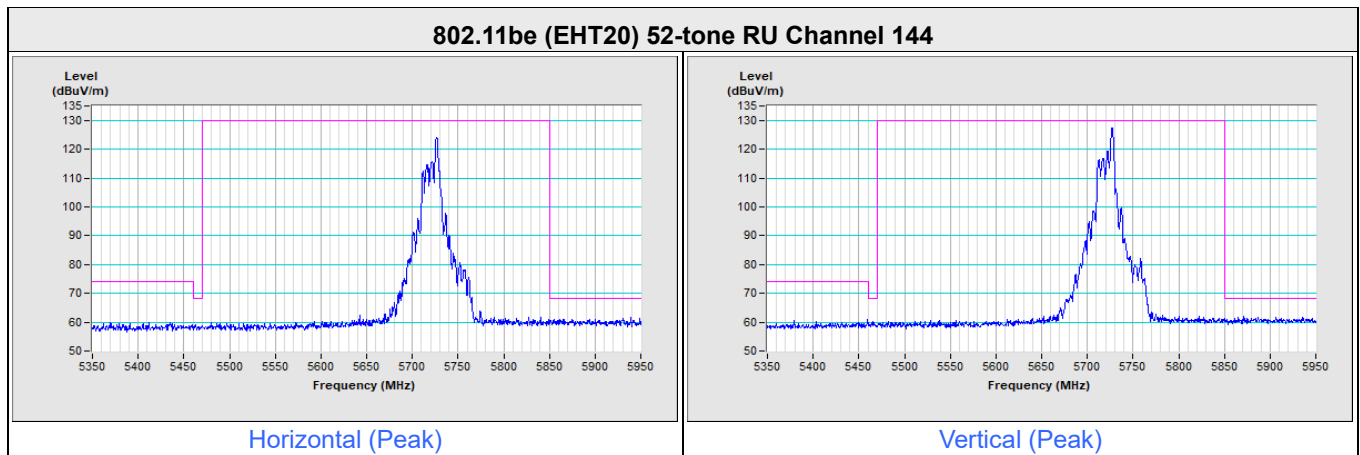


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 52-tone RU Channel 149

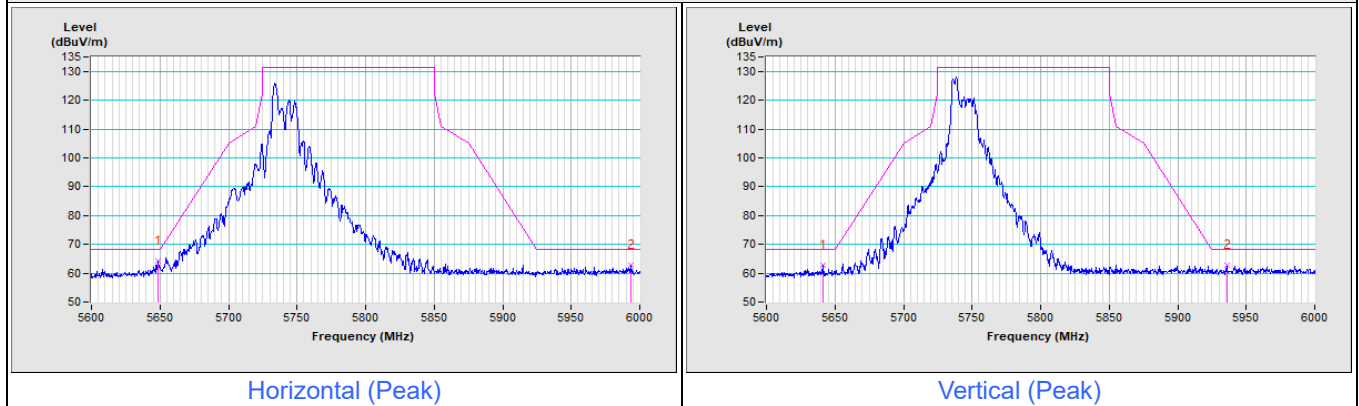

802.11be (EHT20) 52-tone RU Channel 157

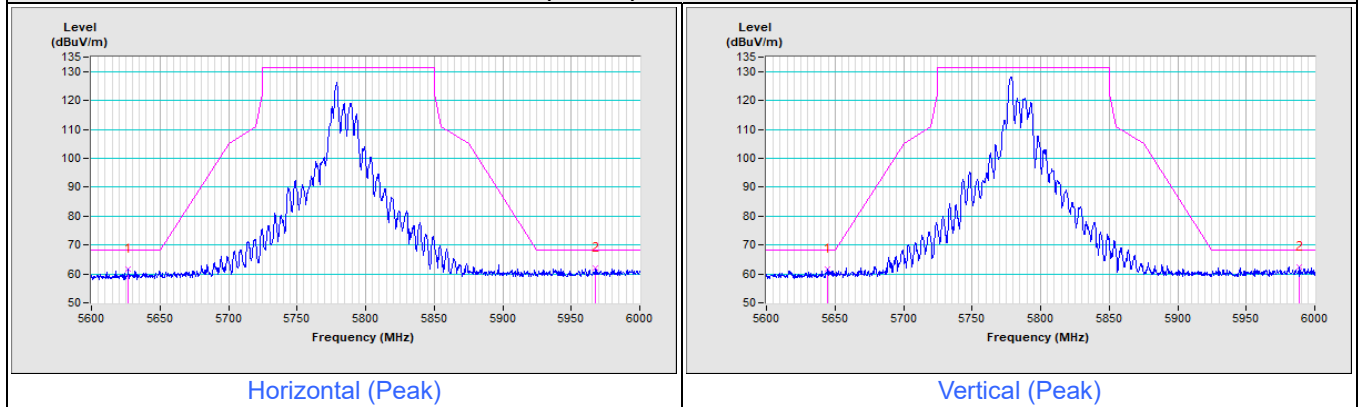


802.11be (EHT20) 52-tone RU Channel 165

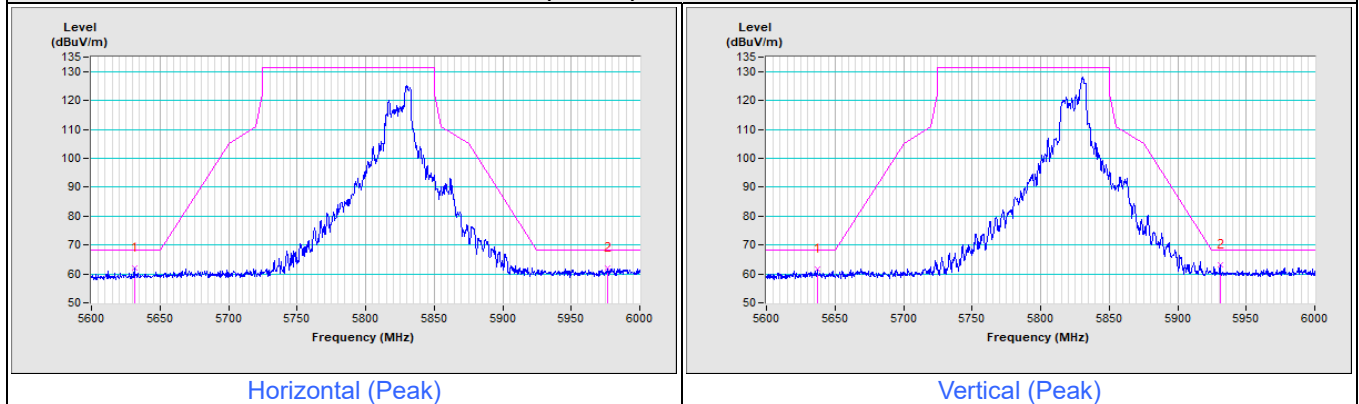


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 36

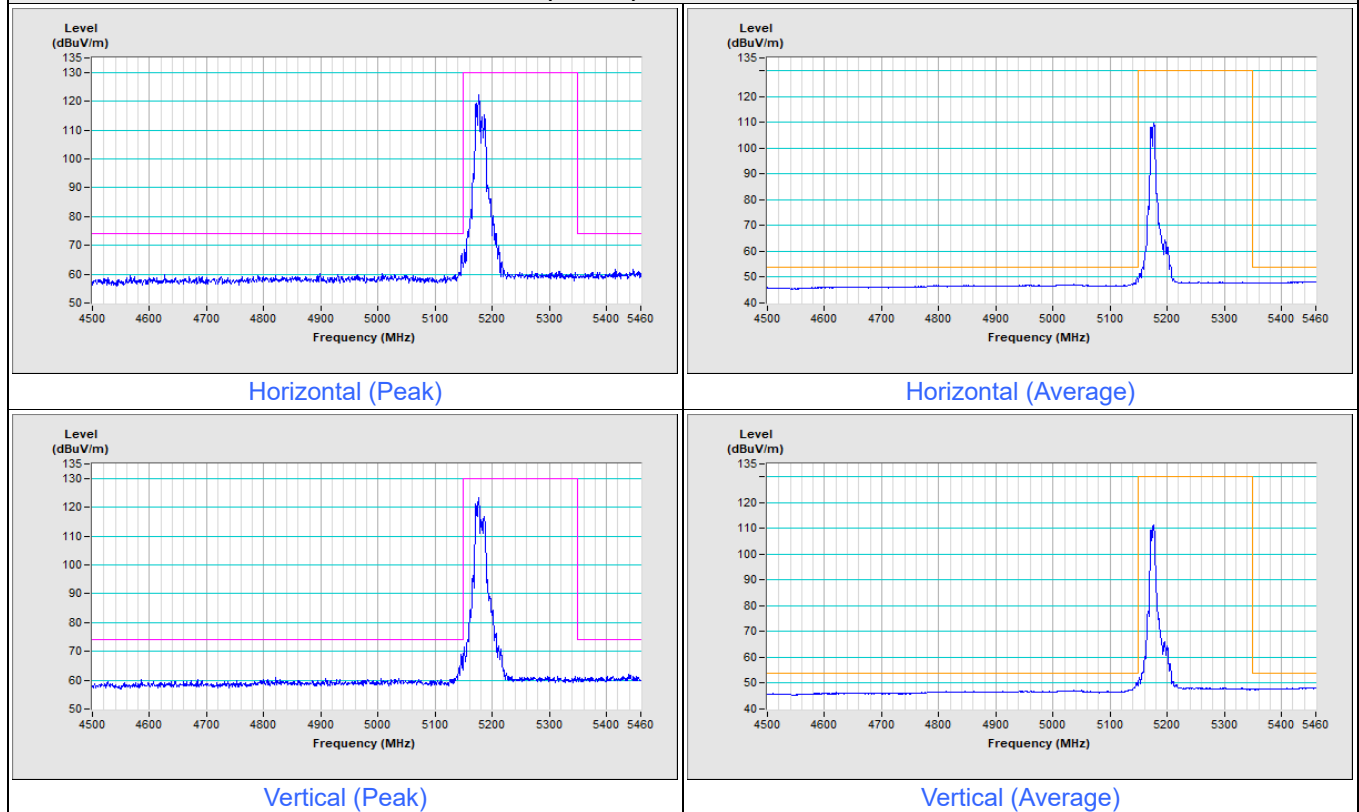


802.11be (EHT20) 106-tone RU Channel 48

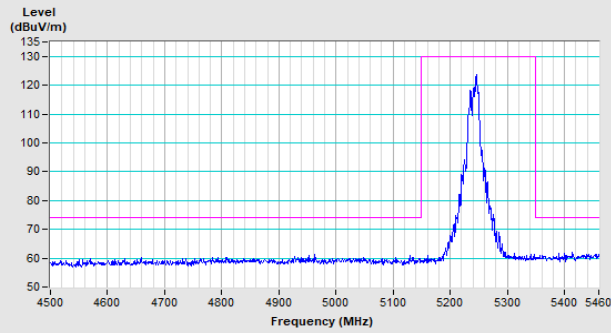


Horizontal (Peak)

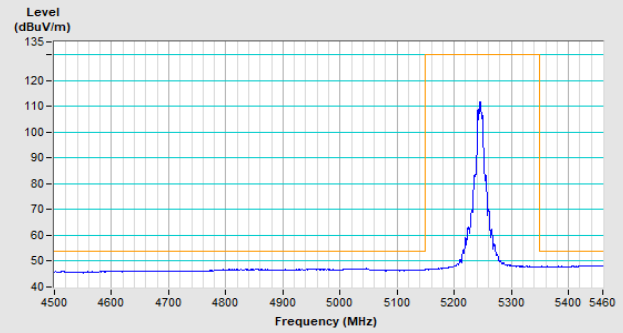

Horizontal (Average)

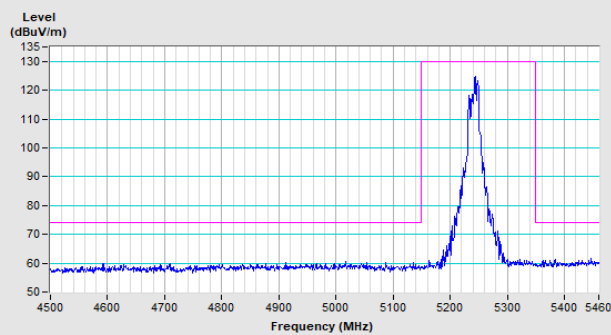


Vertical (Peak)

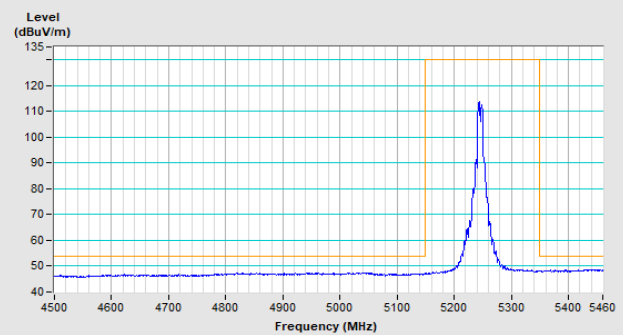


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 52

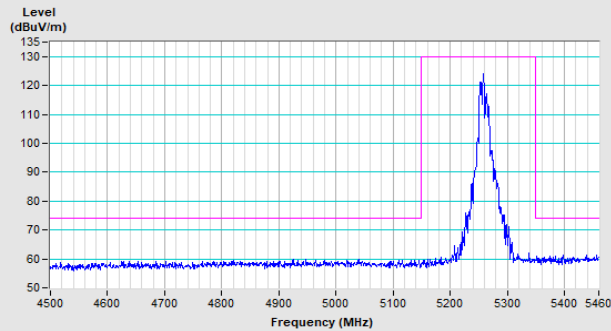


Horizontal (Peak)

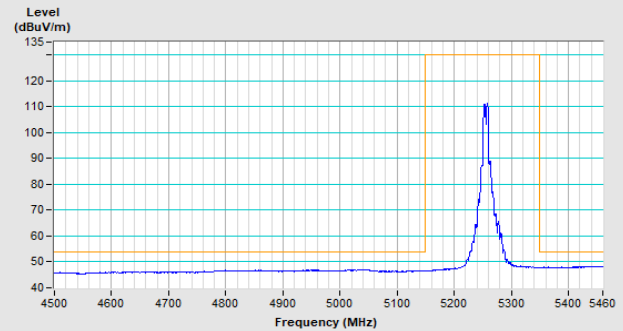

Horizontal (Average)

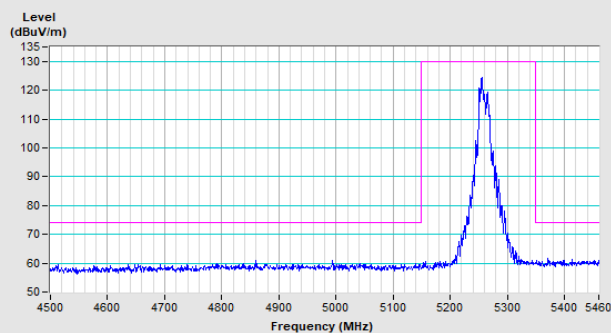


Vertical (Peak)

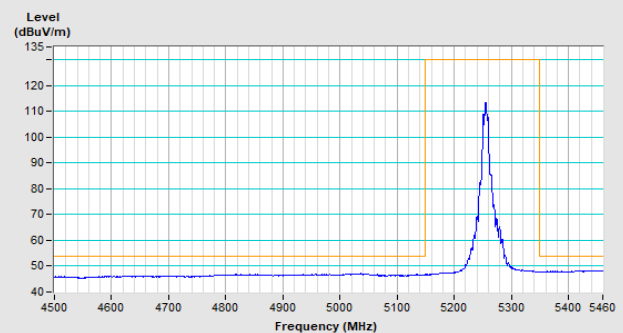


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 64

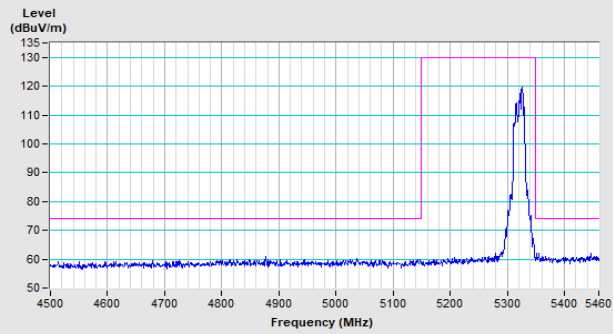


Horizontal (Peak)

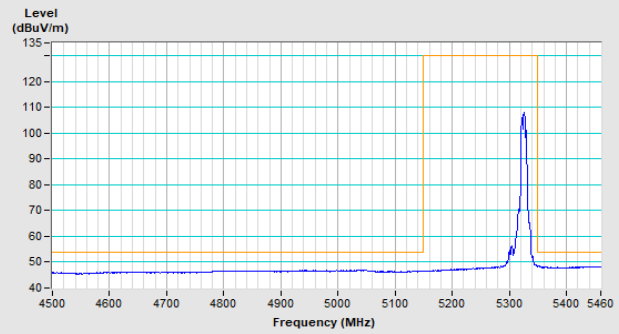

Horizontal (Average)

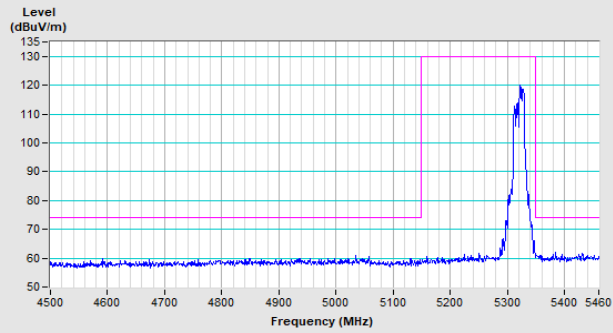


Vertical (Peak)

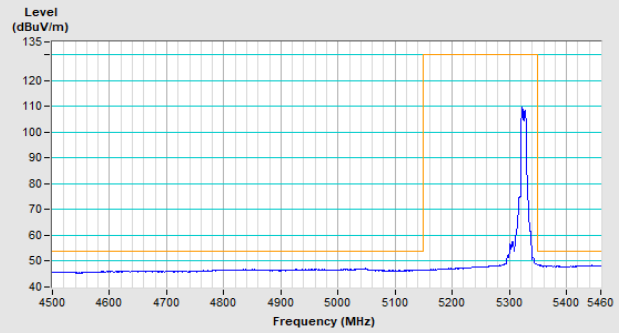


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 100

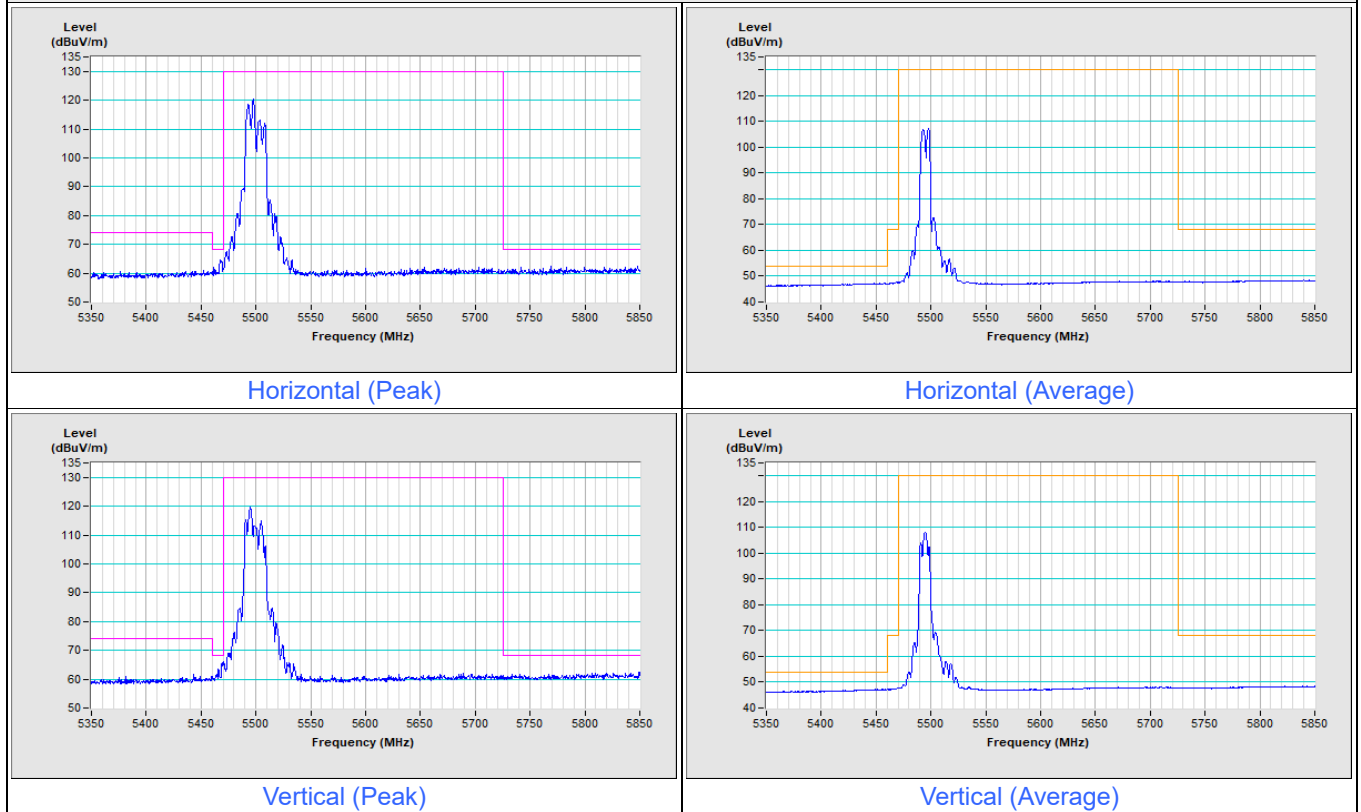

802.11be (EHT20) 106-tone RU Channel 140

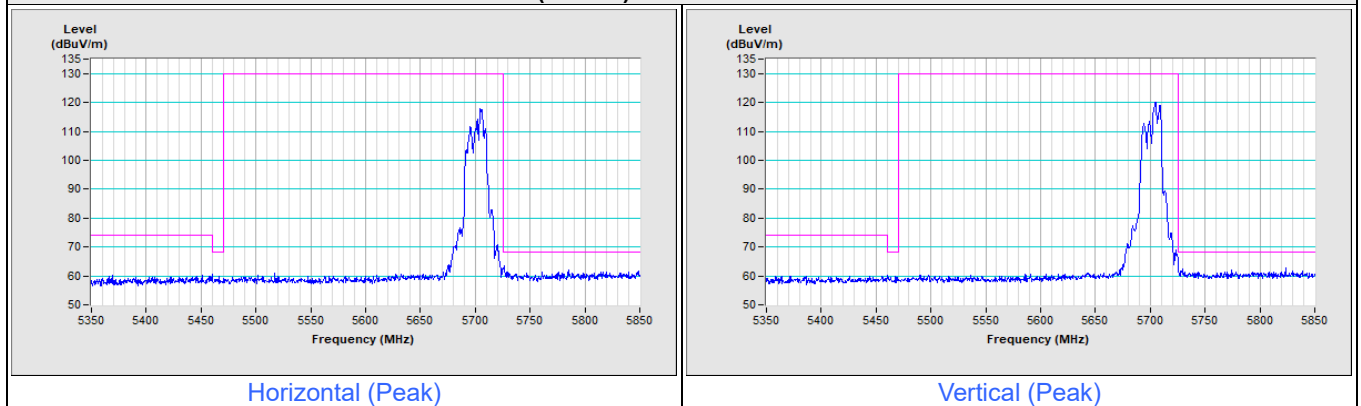


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

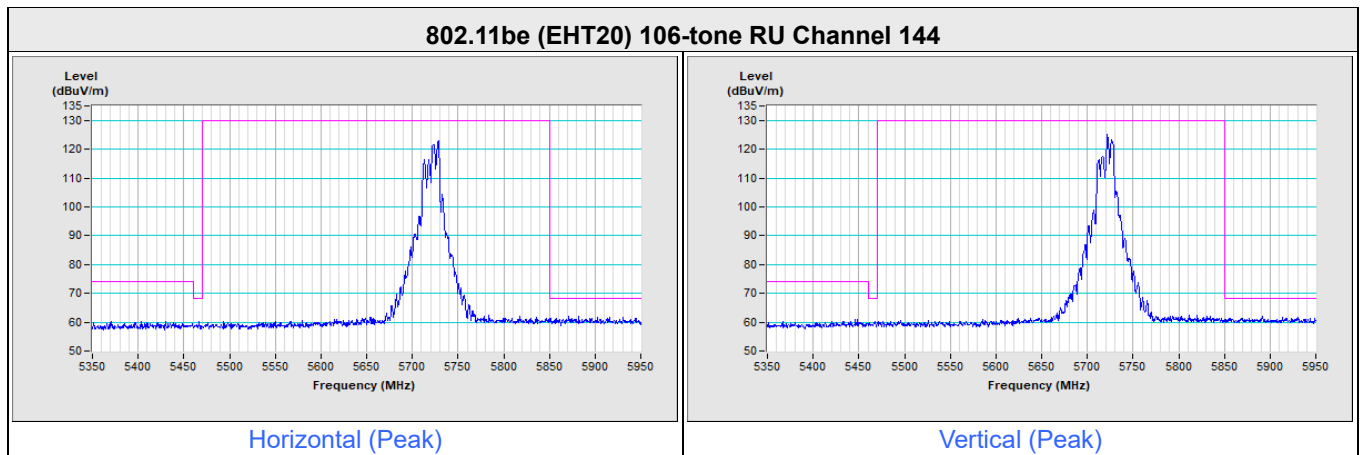


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 106-tone RU Channel 149

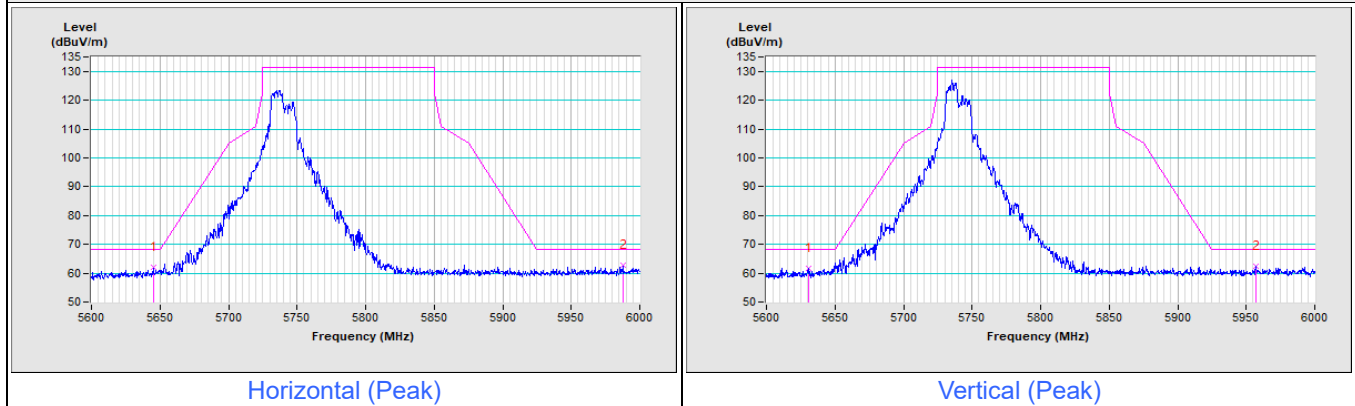

802.11be (EHT20) 106-tone RU Channel 157

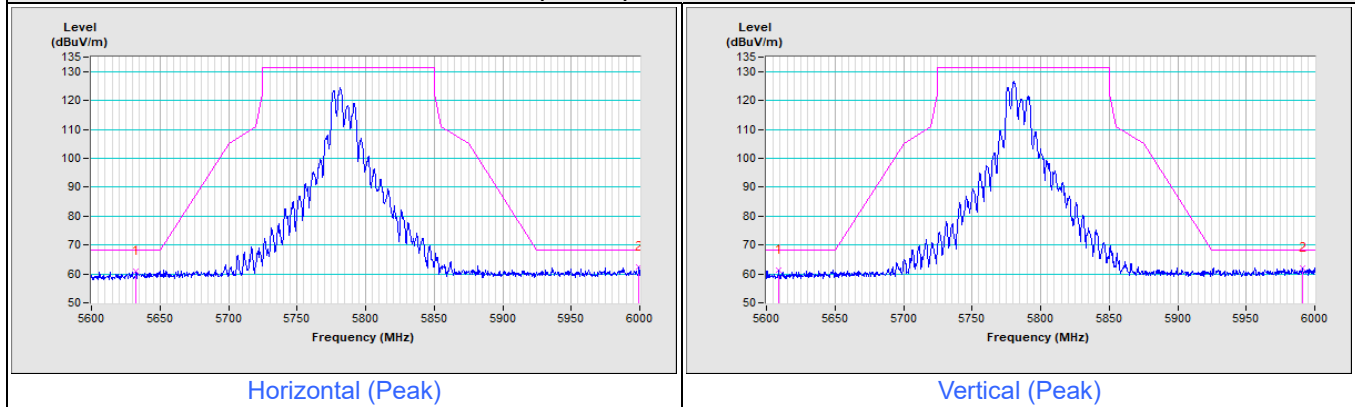


802.11be (EHT20) 106-tone RU Channel 165

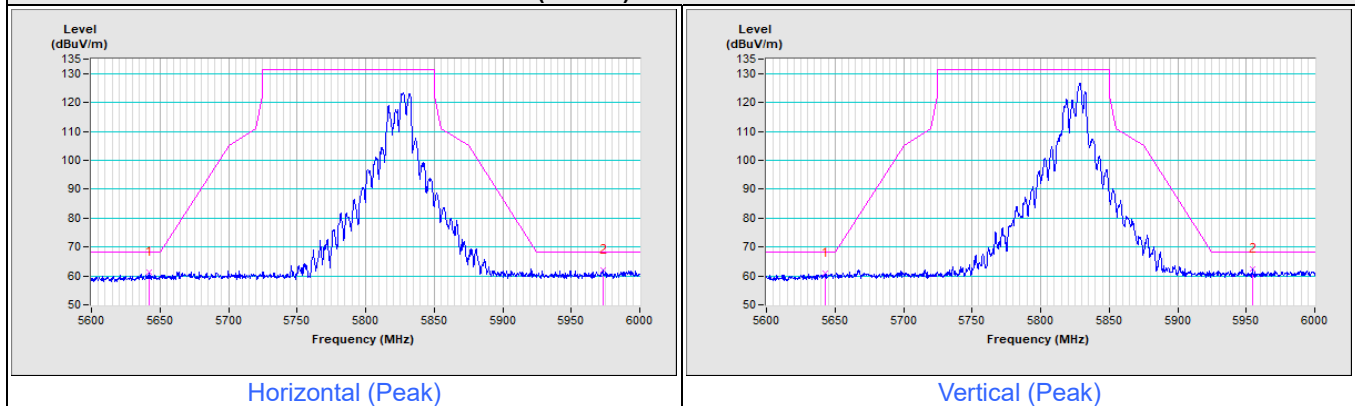


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 48

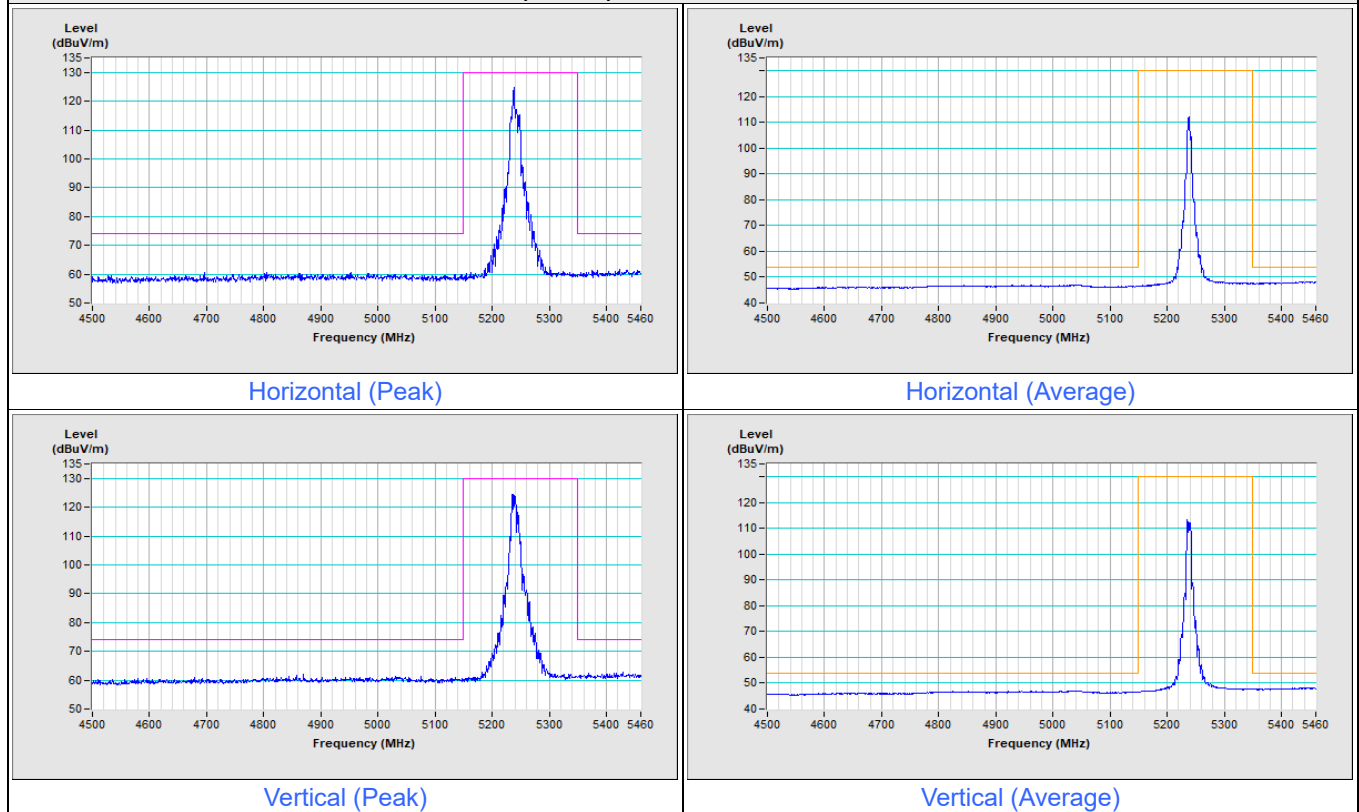


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT20) 52+26-tone MRU Channel 157

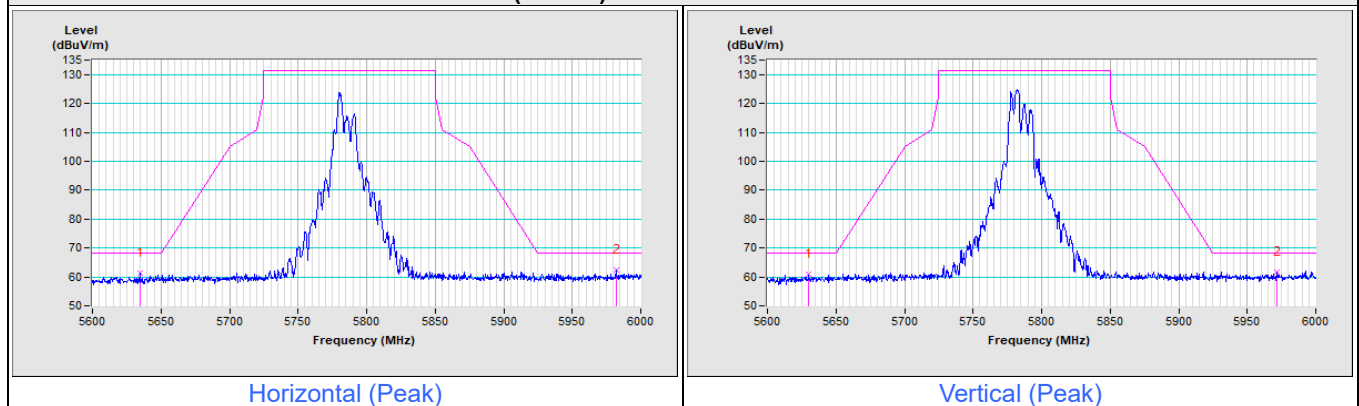


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 48

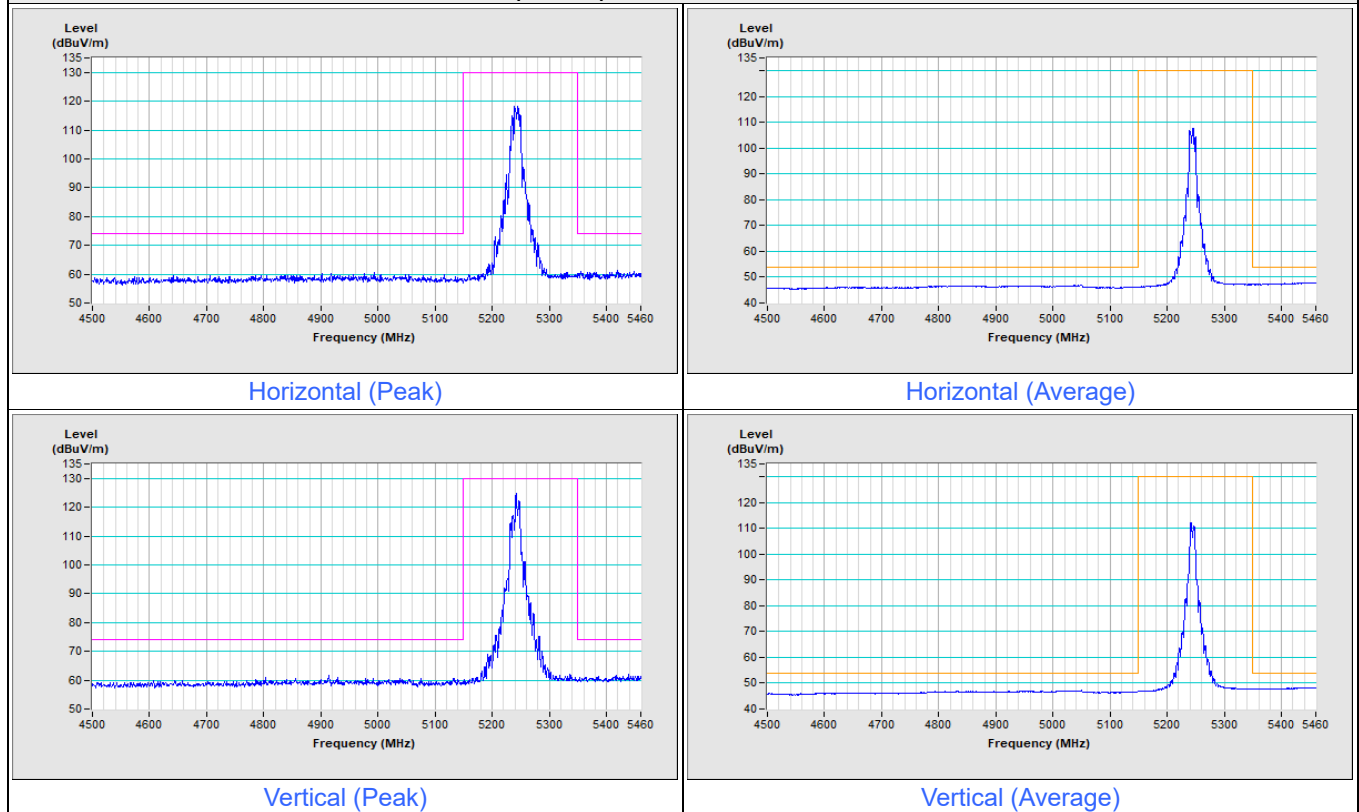


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT20) 106+26-tone MRU Channel 157

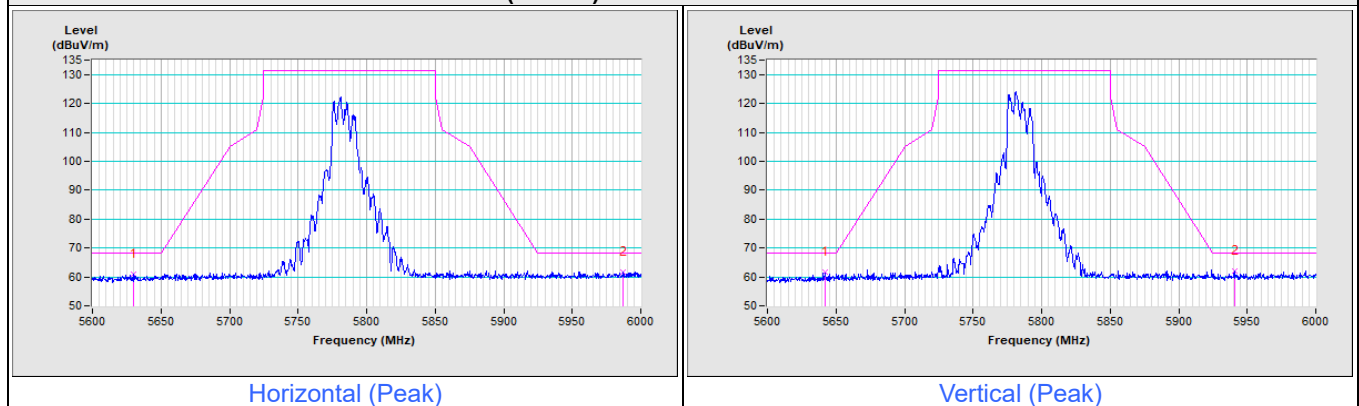


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 42

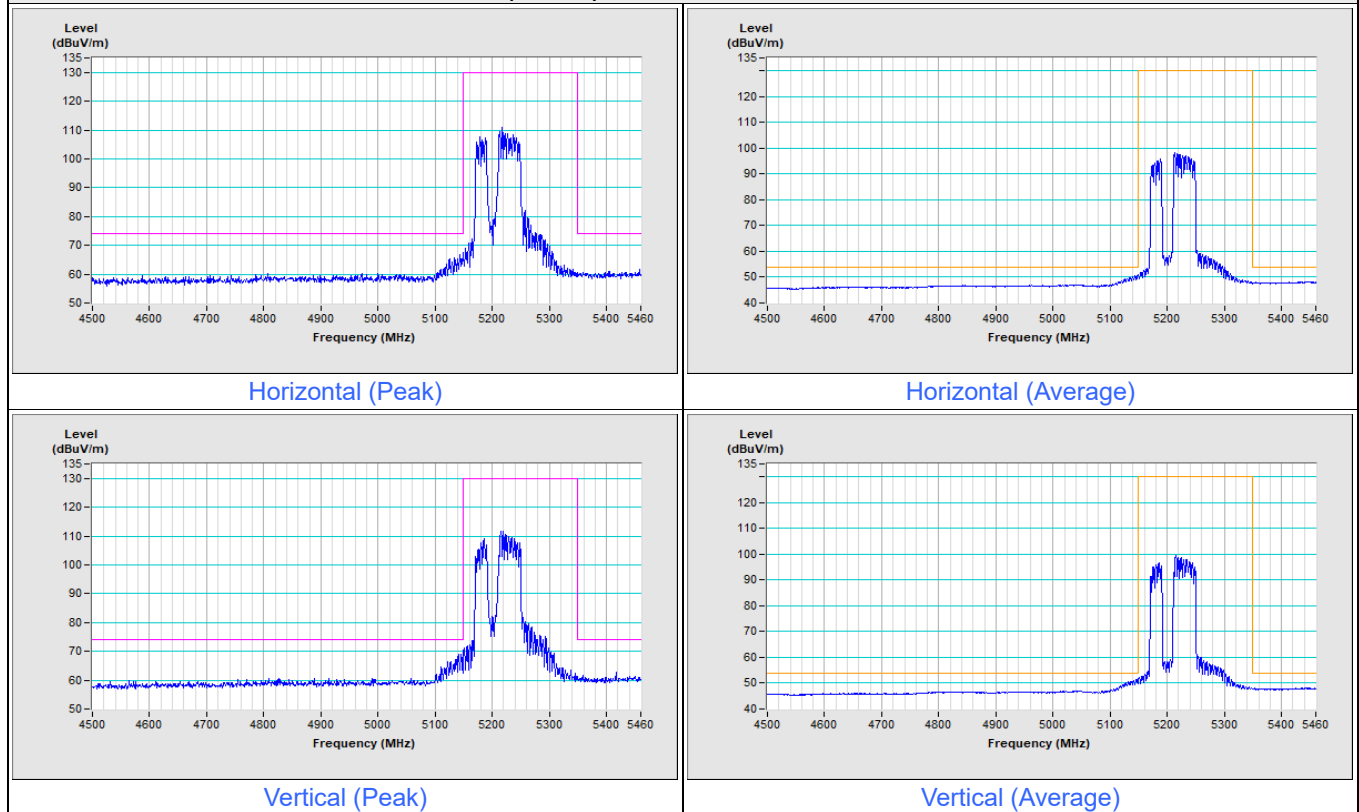


802.11be (EHT80) 484+242-tone MRU Channel 58

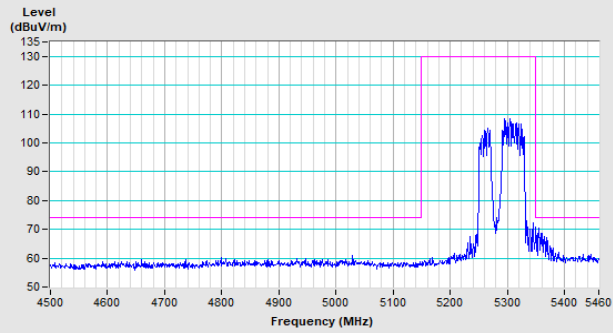


Horizontal (Peak)

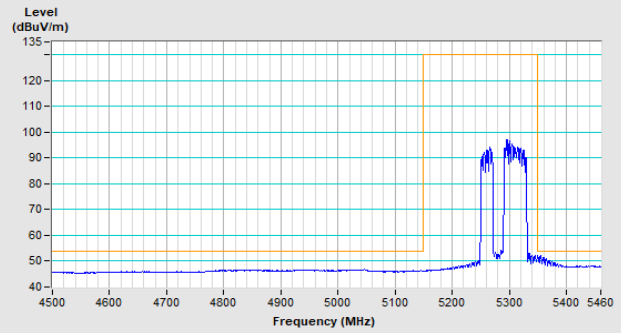

Horizontal (Average)

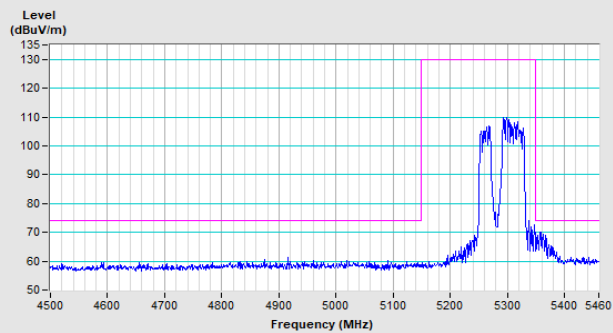


Vertical (Peak)

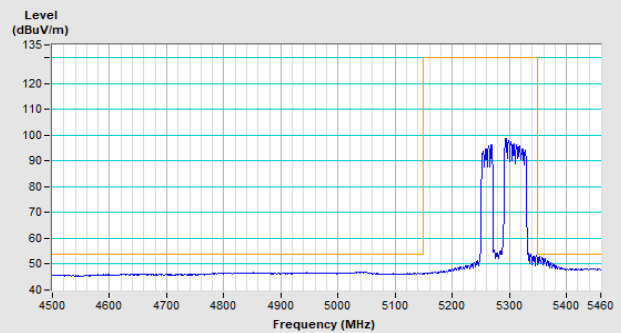


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) 484+242-tone MRU Channel 138

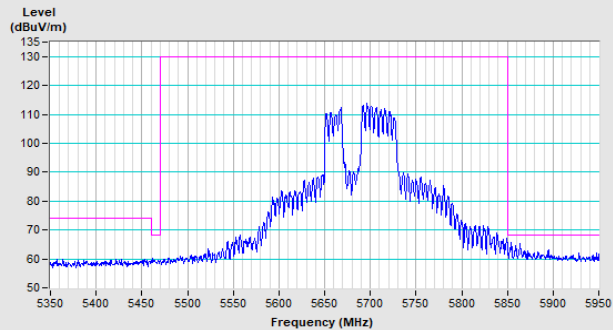


Horizontal (Peak)

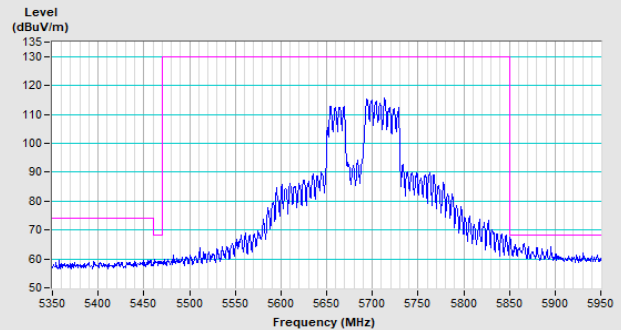

Vertical (Peak)


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) 484+242-tone MRU Channel 155

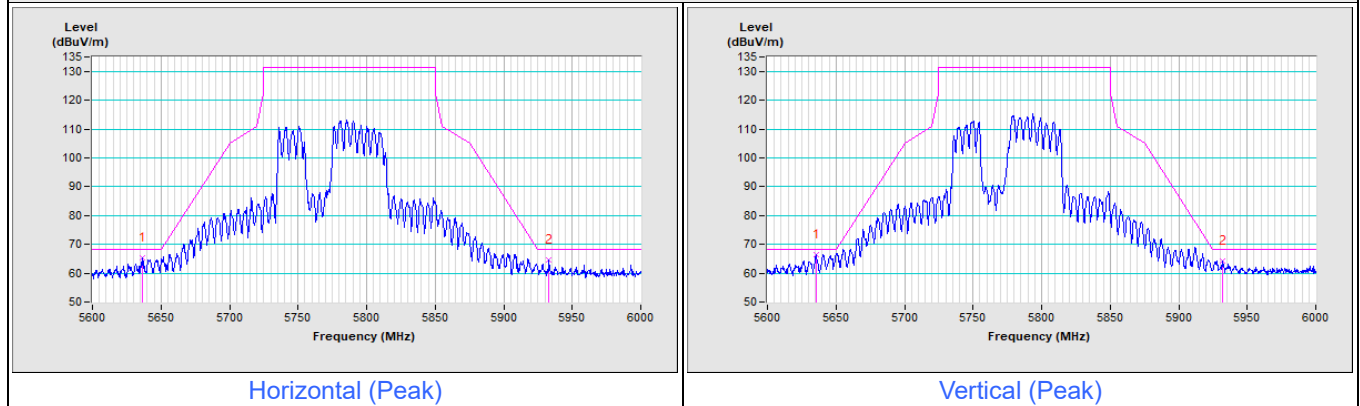


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 50

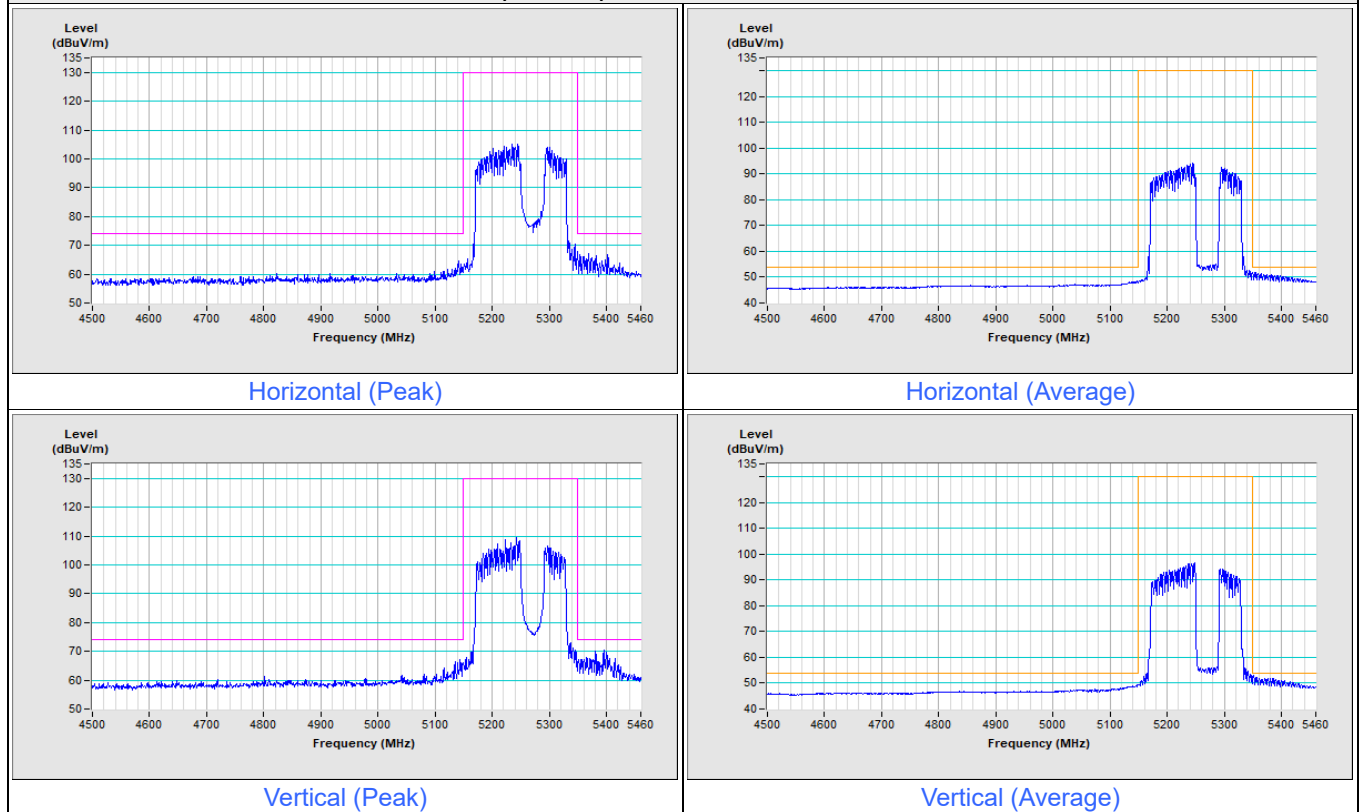


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 144

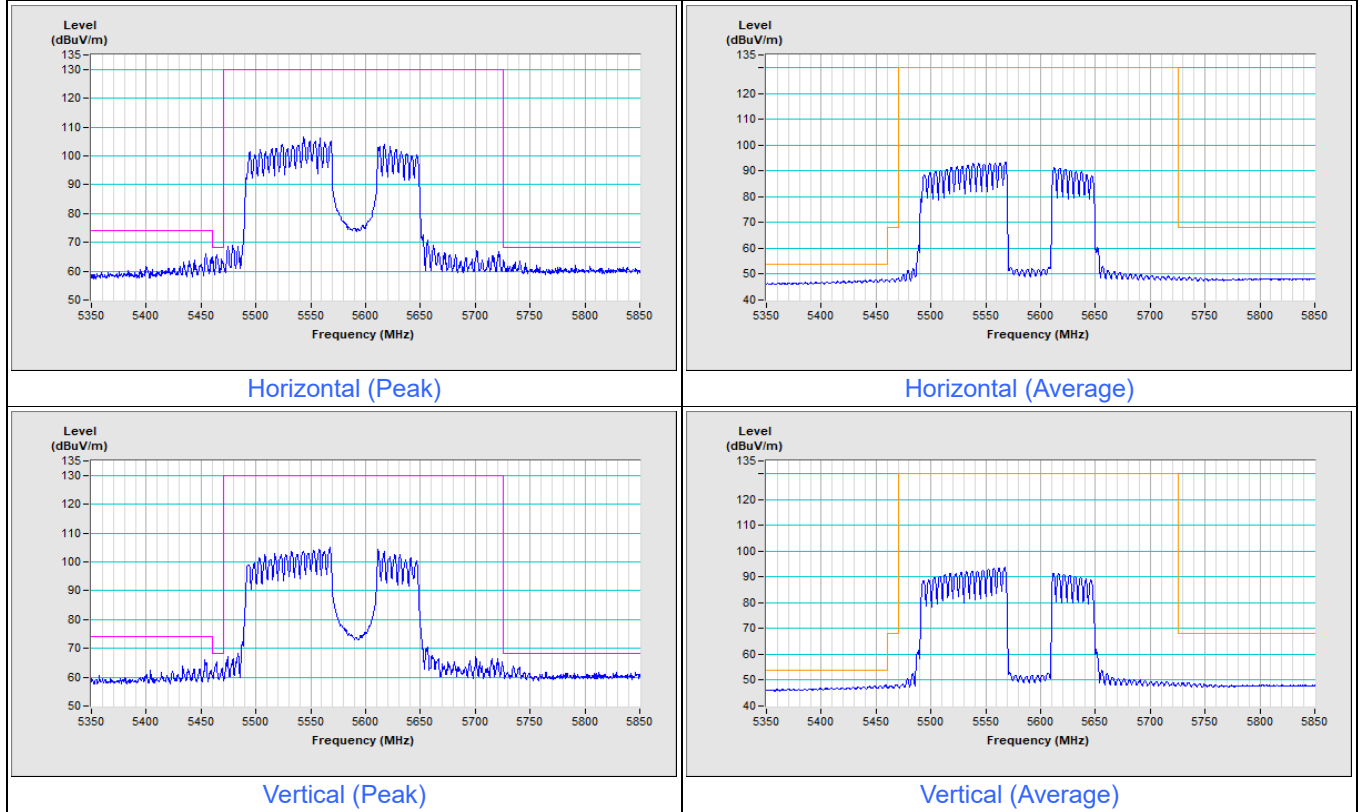


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 50

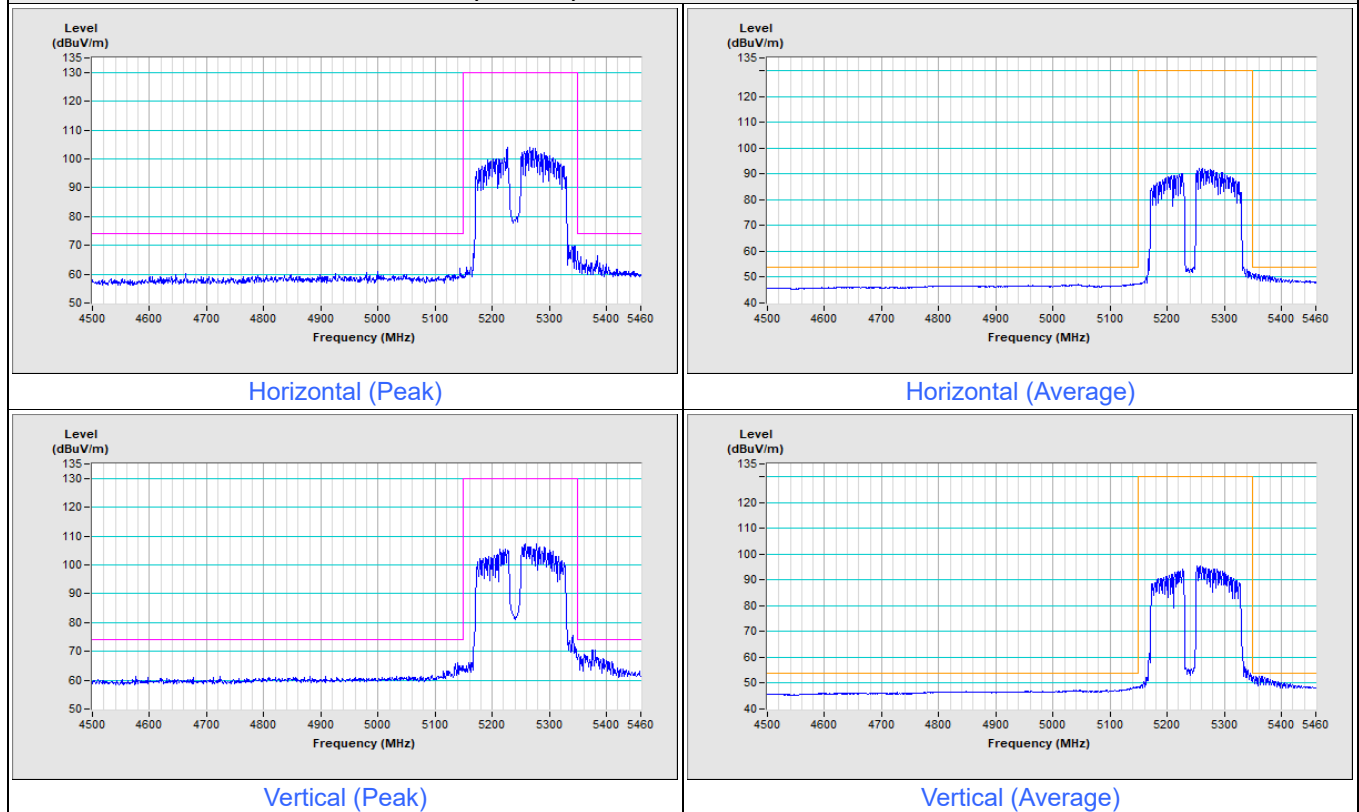


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 114

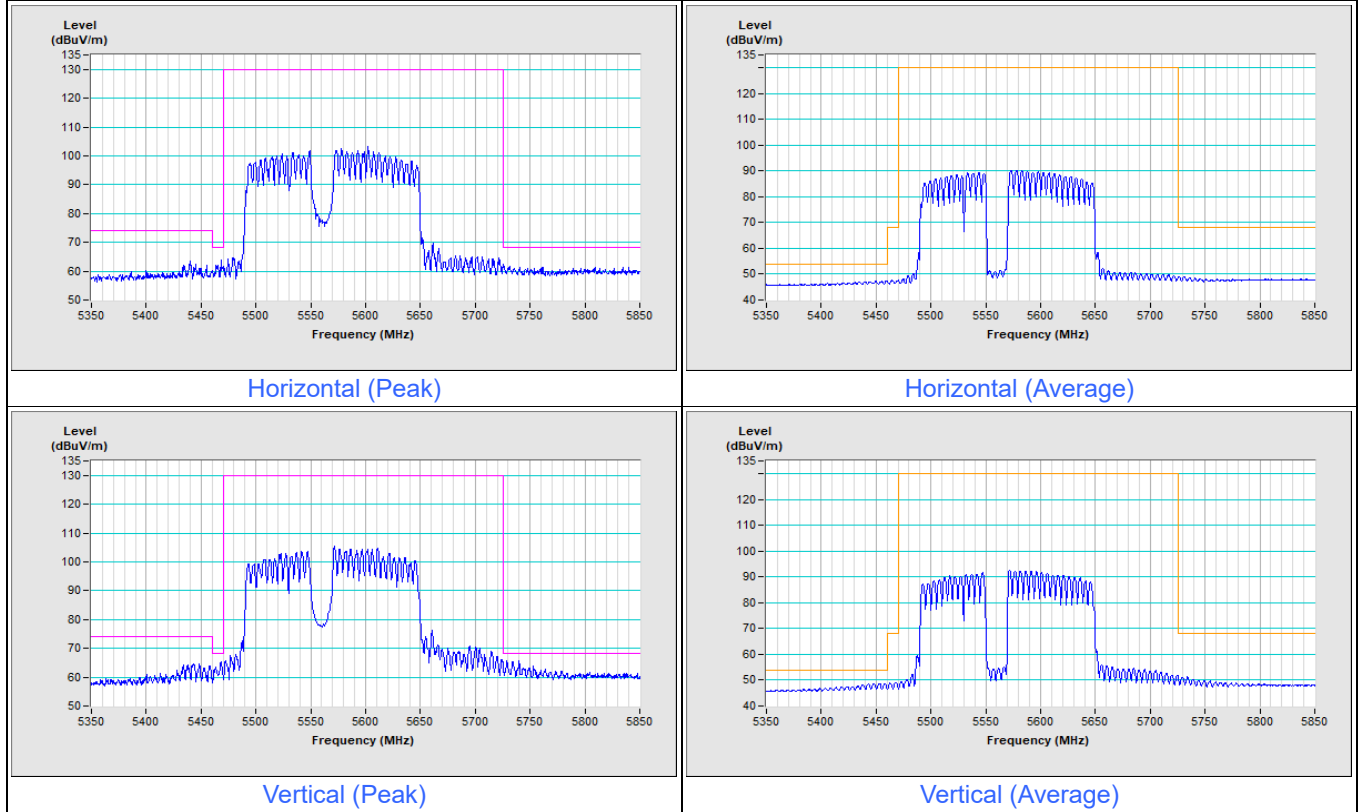


1TX (Test Mode B - Monopole Antenna)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

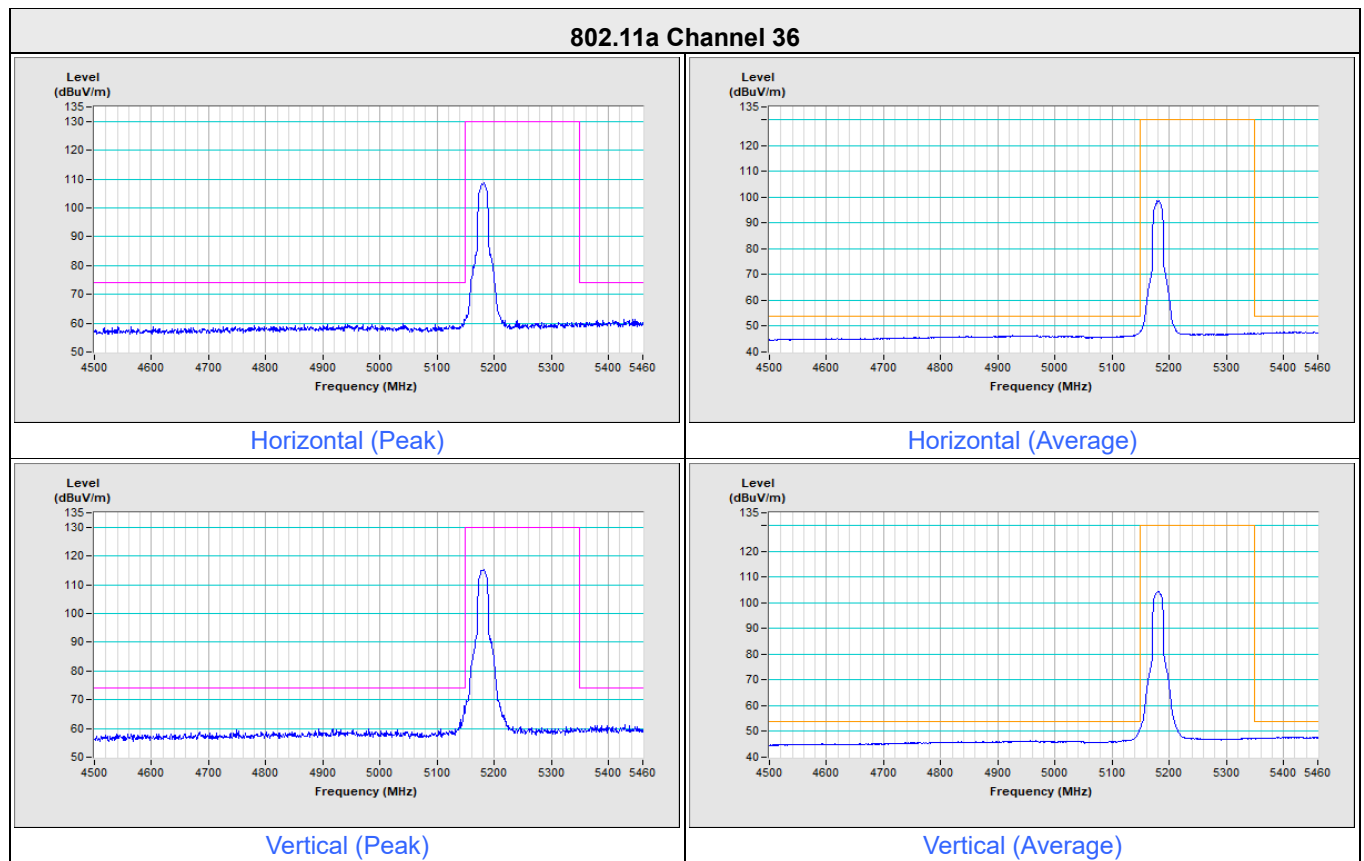


802.11a Channel 48

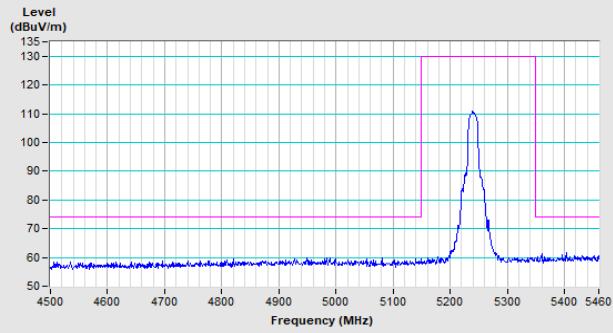


Horizontal (Peak)

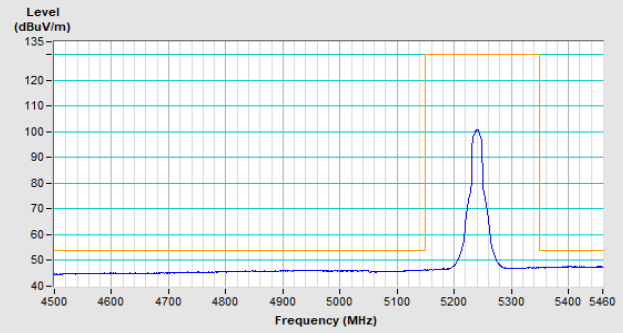

Horizontal (Average)

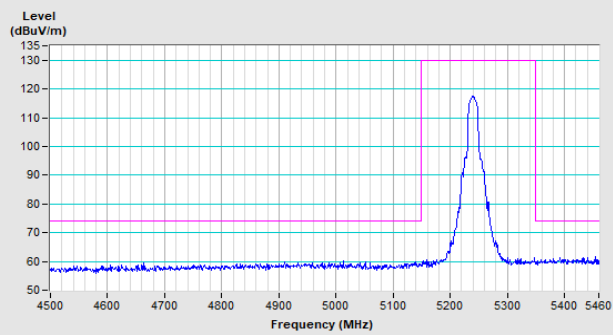


Vertical (Peak)

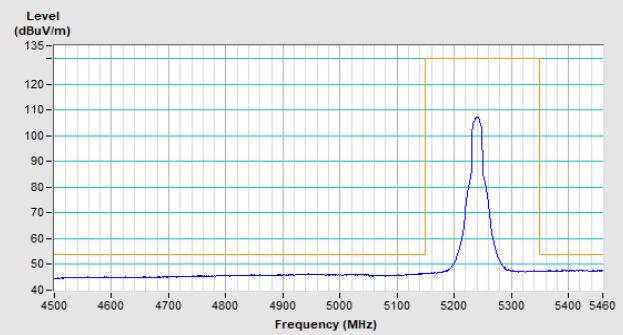


Vertical (Average)


802.11a Channel 52

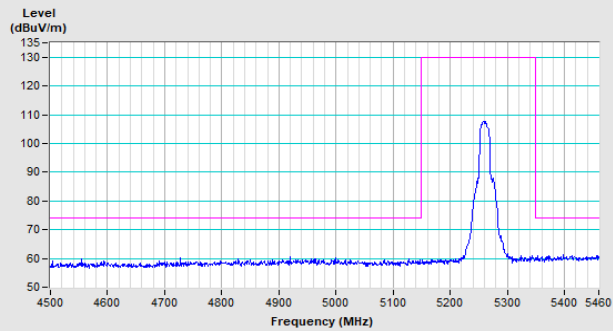


Horizontal (Peak)

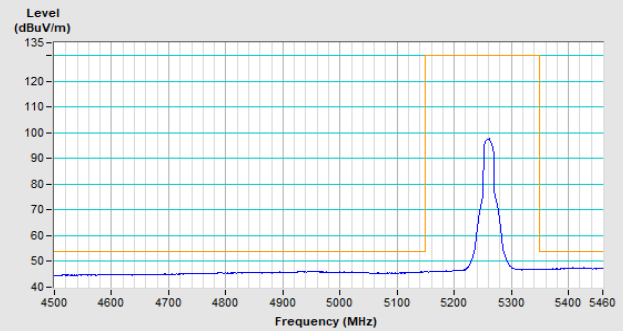

Horizontal (Average)

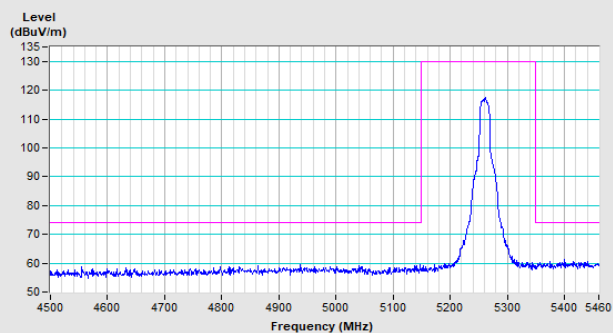


Vertical (Peak)

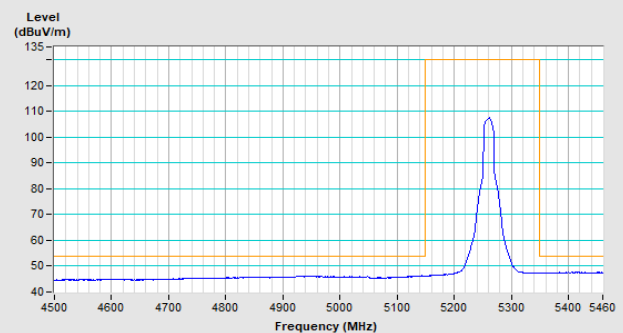


Vertical (Average)


802.11a Channel 64

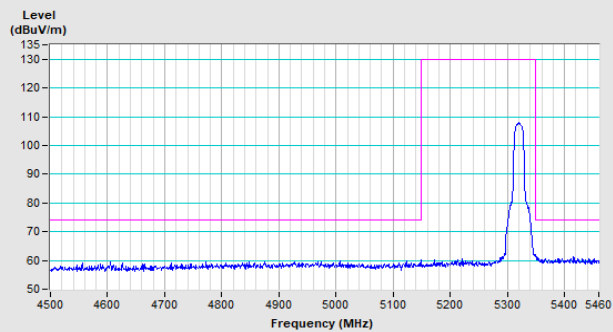


Horizontal (Peak)

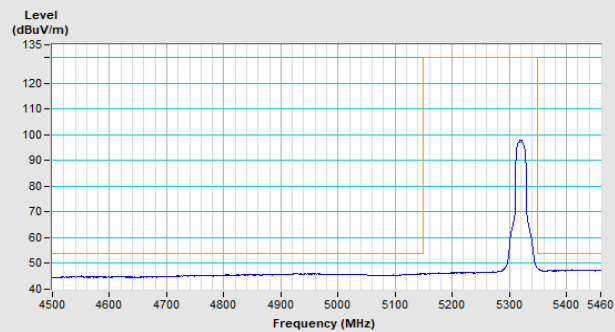

Horizontal (Average)

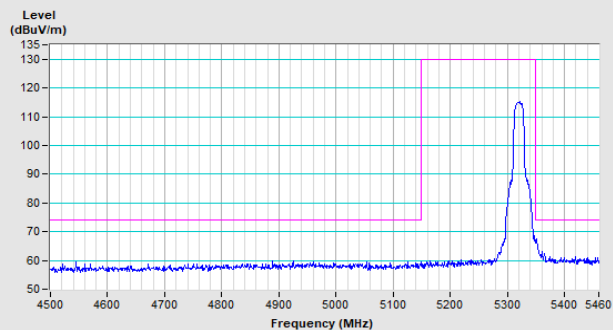


Vertical (Peak)

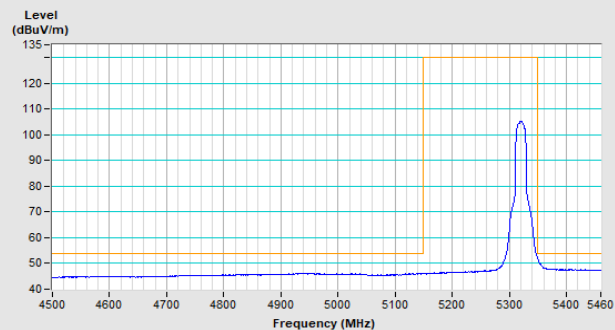


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 100

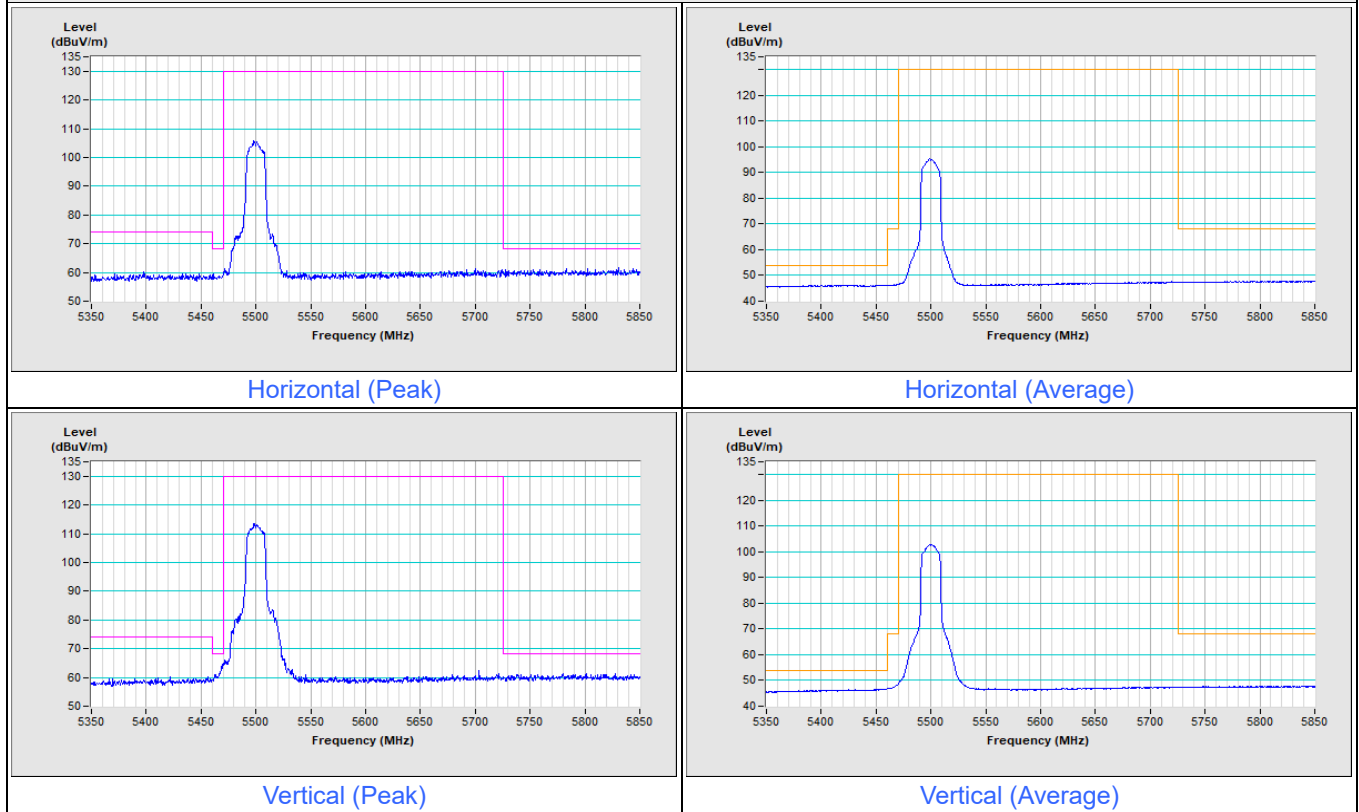

802.11a Channel 140

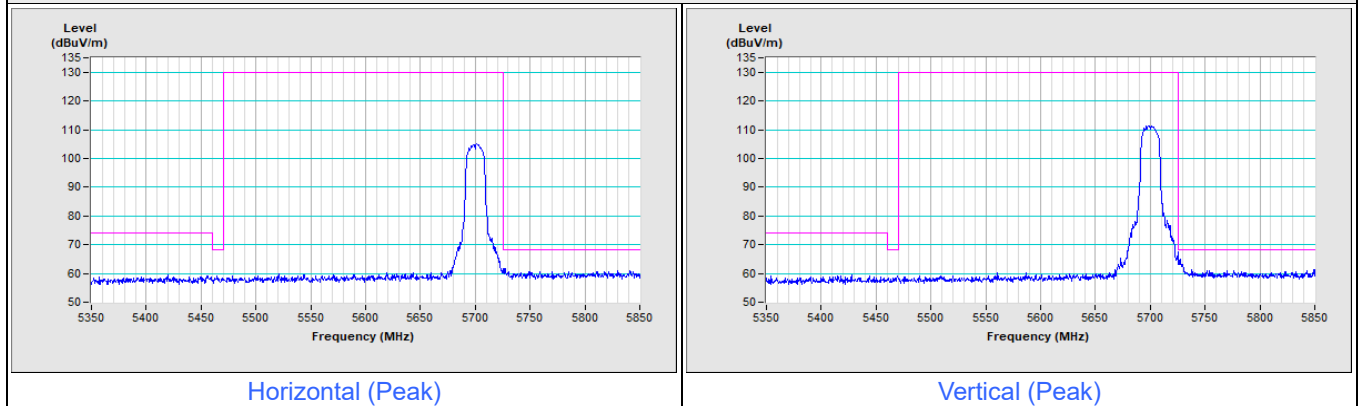


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

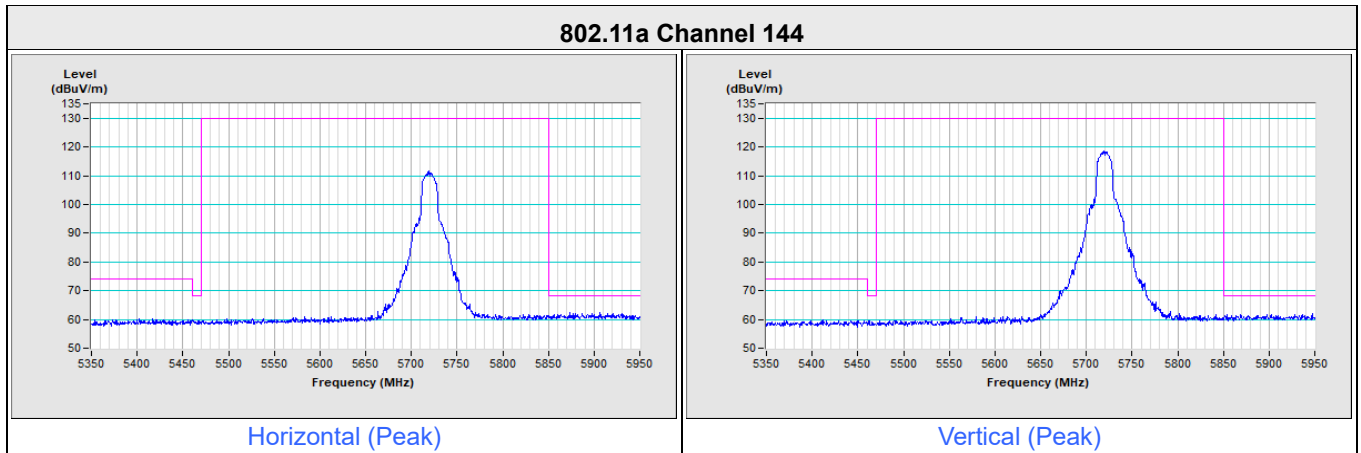


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11a Channel 149

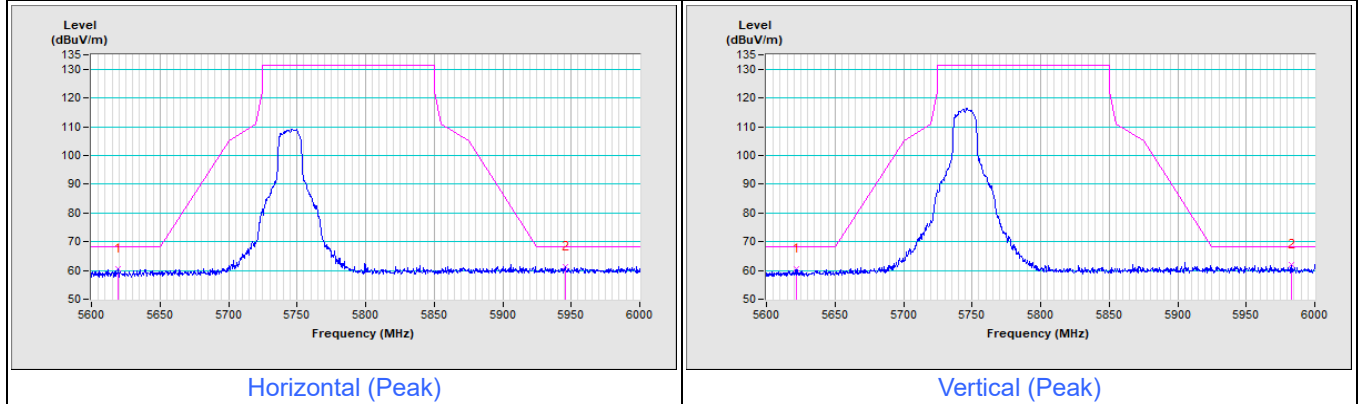

802.11a Channel 157

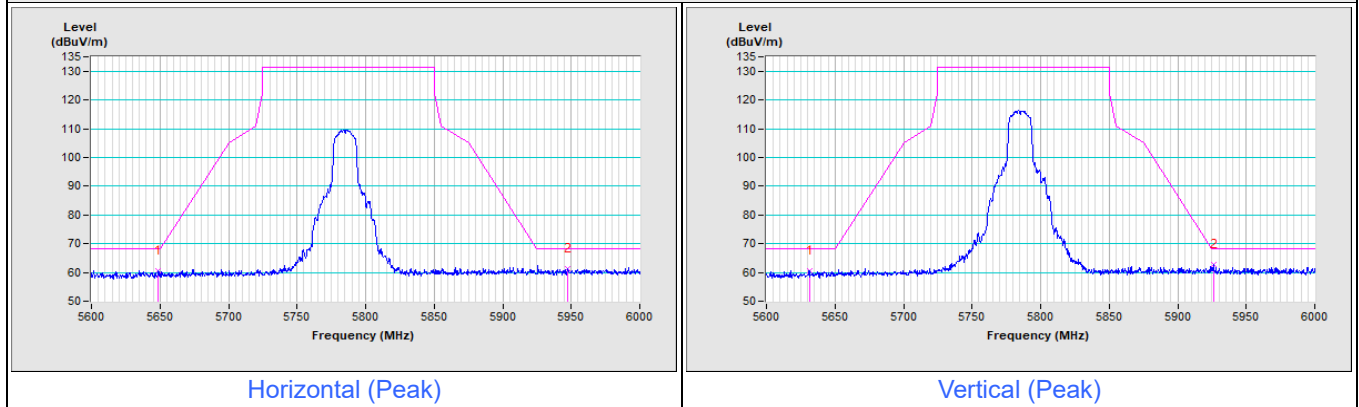


802.11a Channel 165

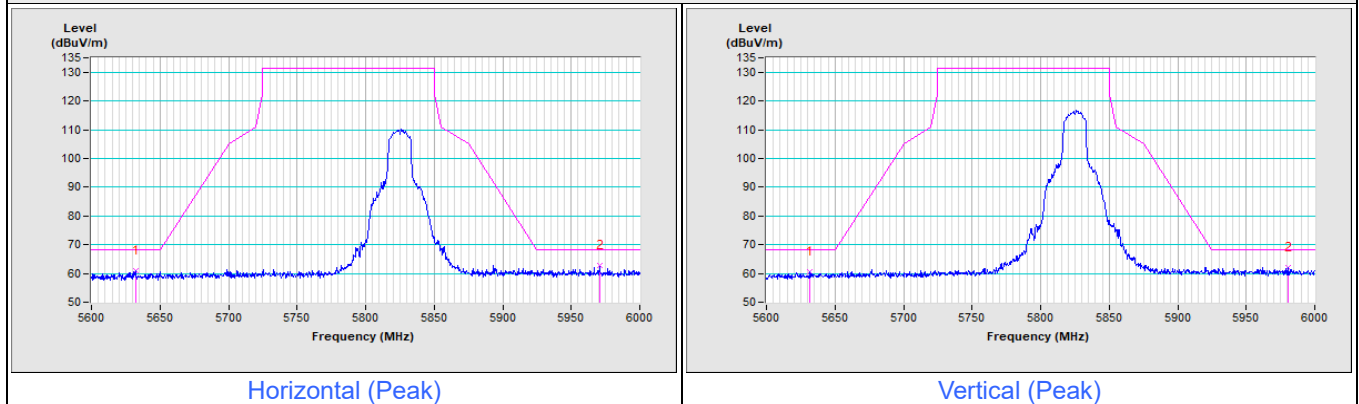


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) Channel 36

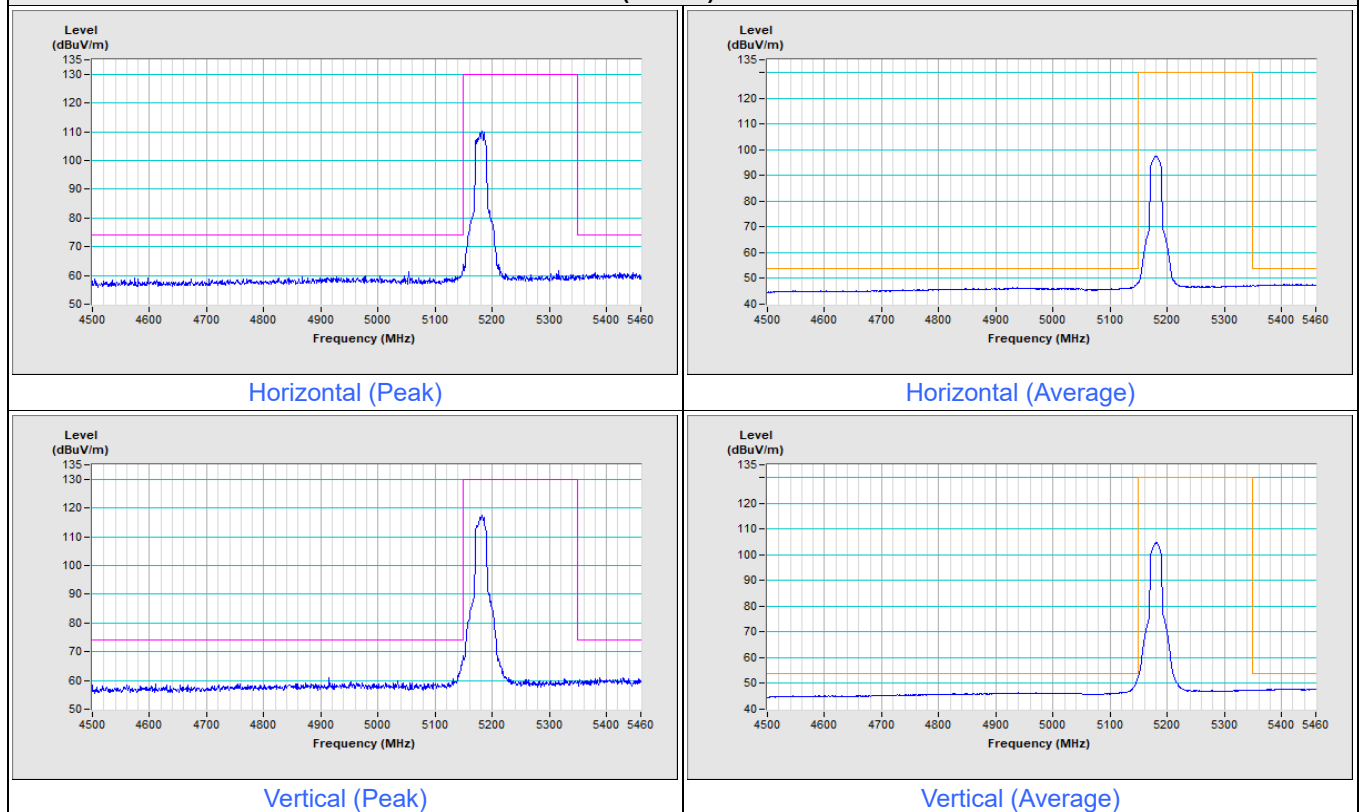


802.11be (EHT20) Channel 48

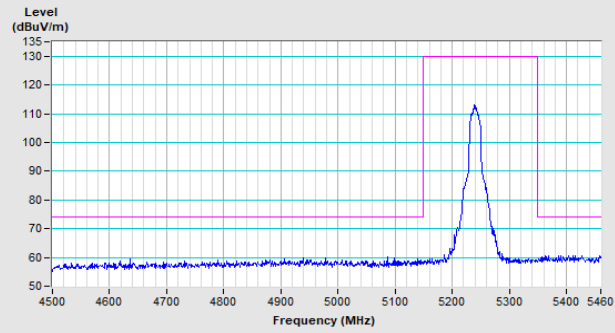


Horizontal (Peak)

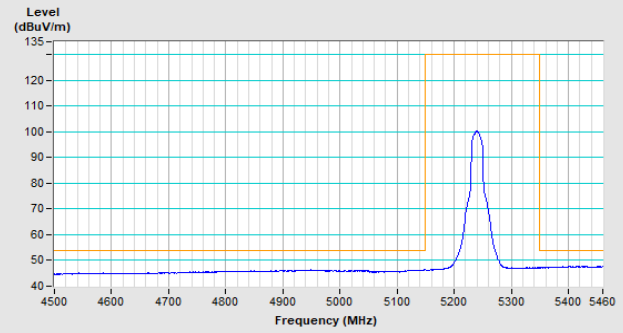

Horizontal (Average)

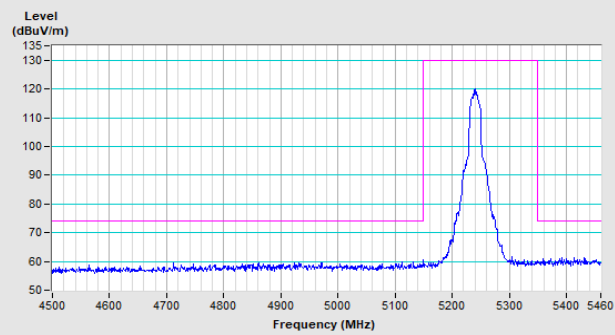


Vertical (Peak)

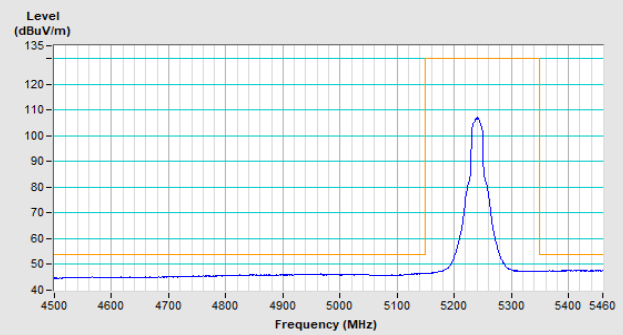


Vertical (Average)


802.11be (EHT20) Channel 52

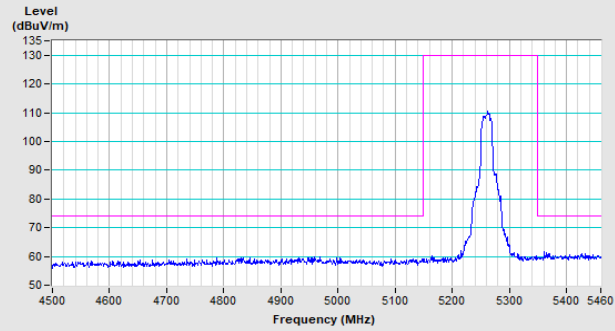


Horizontal (Peak)

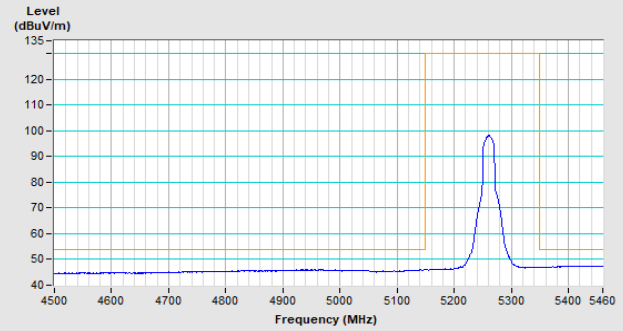

Horizontal (Average)

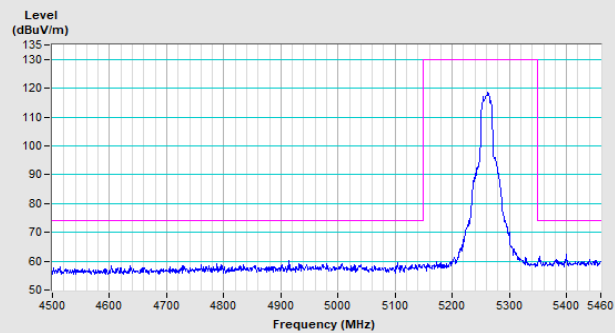


Vertical (Peak)

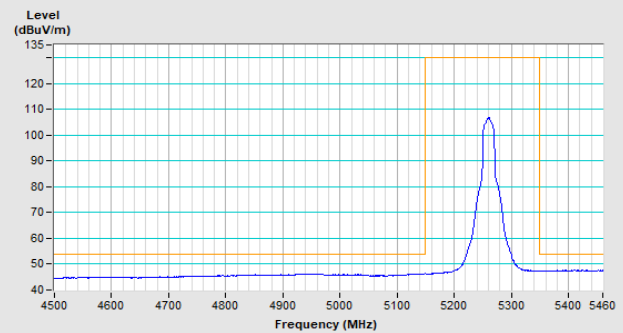


Vertical (Average)


802.11be (EHT20) Channel 64

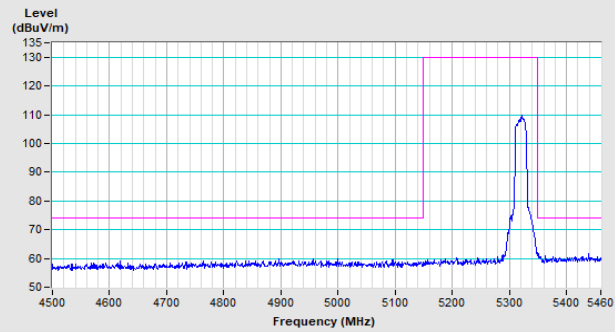


Horizontal (Peak)

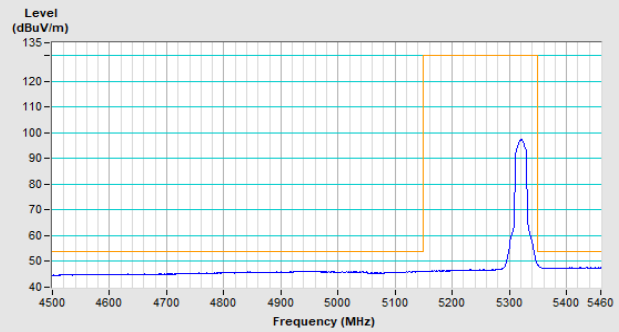

Horizontal (Average)

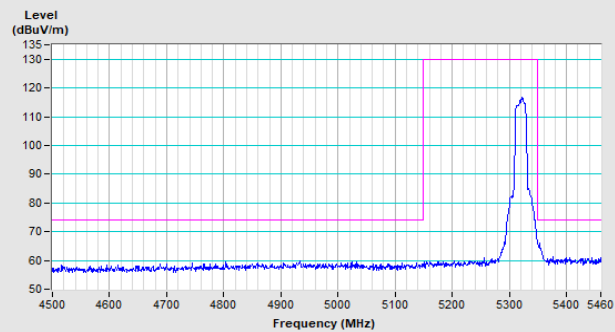


Vertical (Peak)

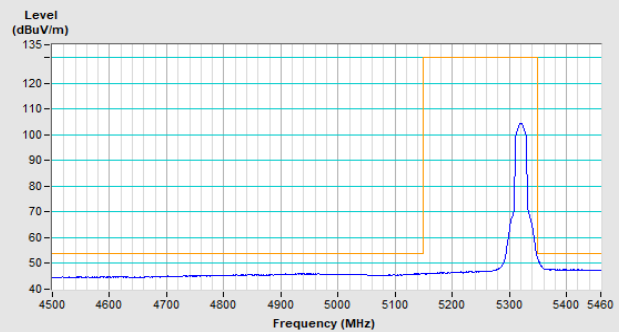


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Channel 100

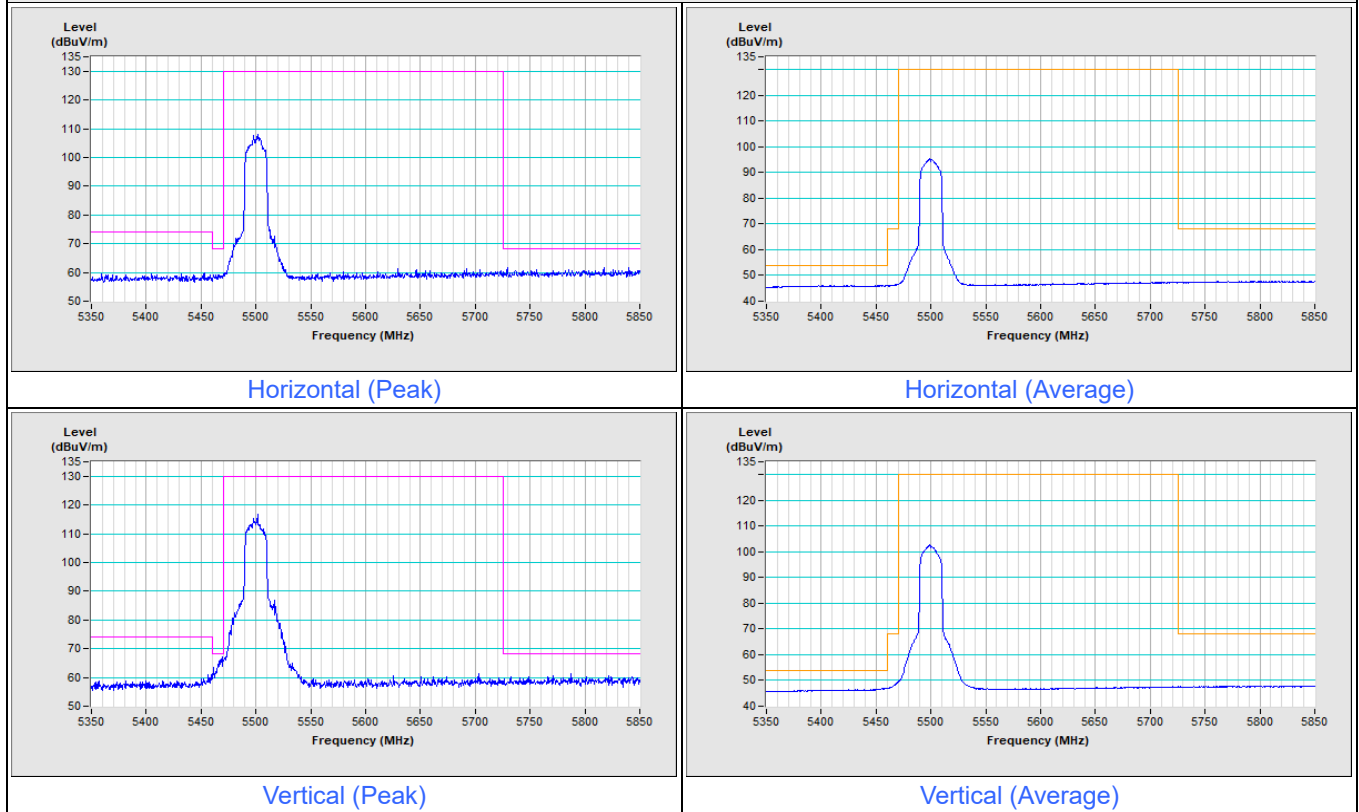

802.11be (EHT20) Channel 140

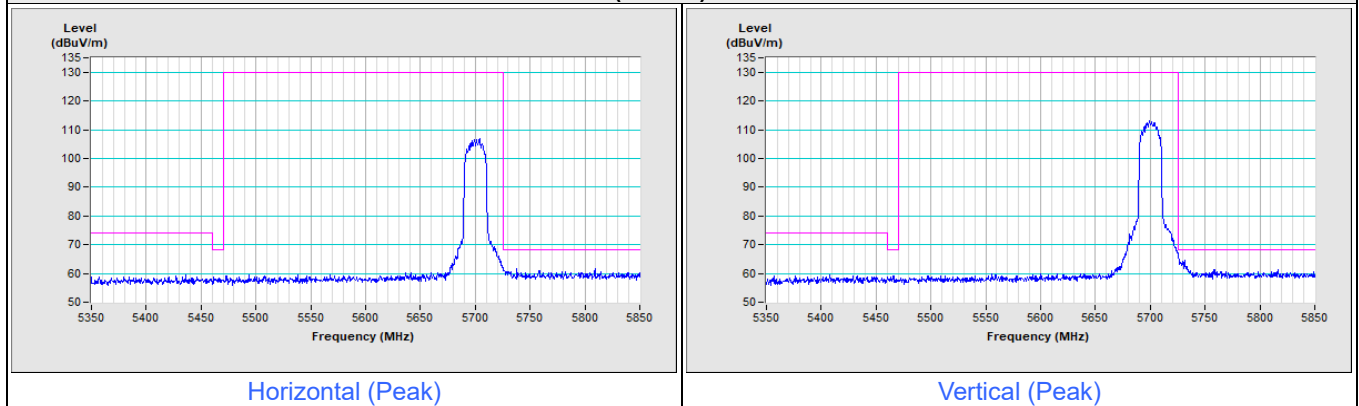


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

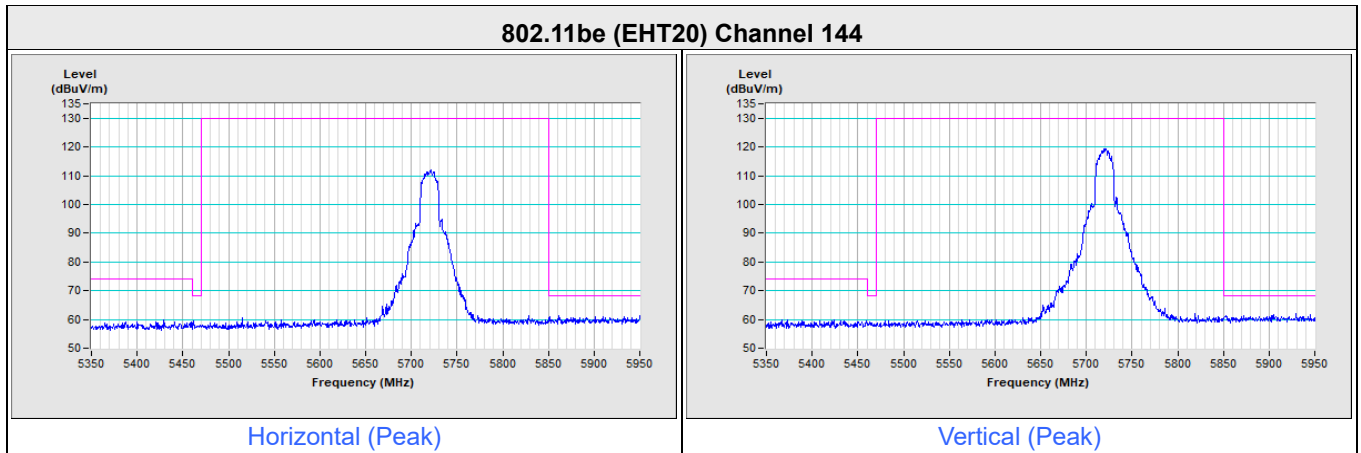


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) Channel 149

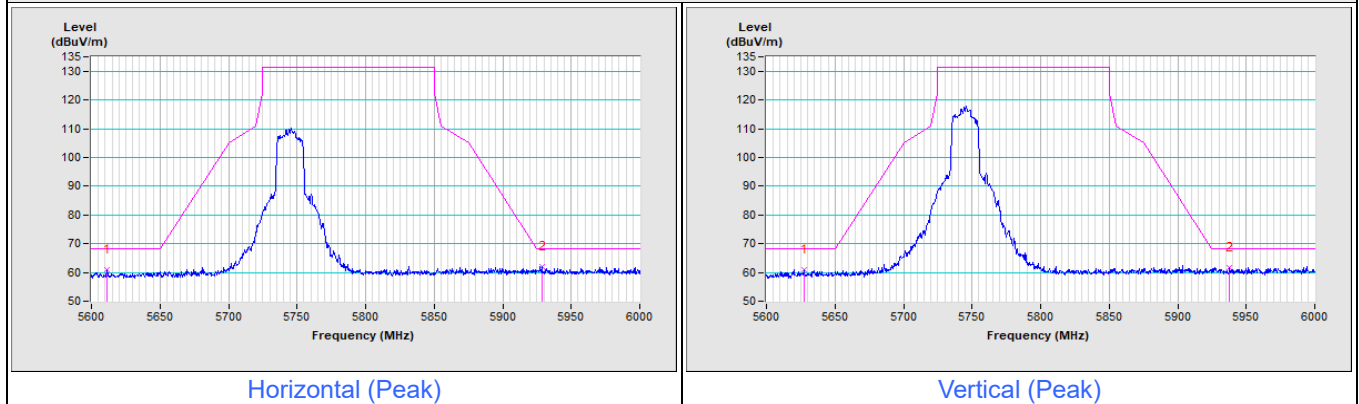

802.11be (EHT20) Channel 157

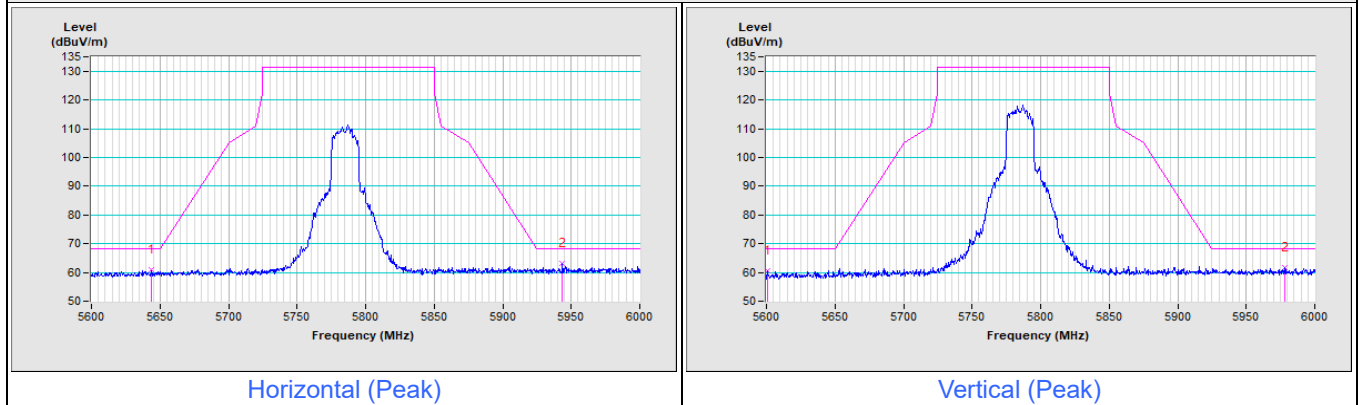


802.11be (EHT20) Channel 165

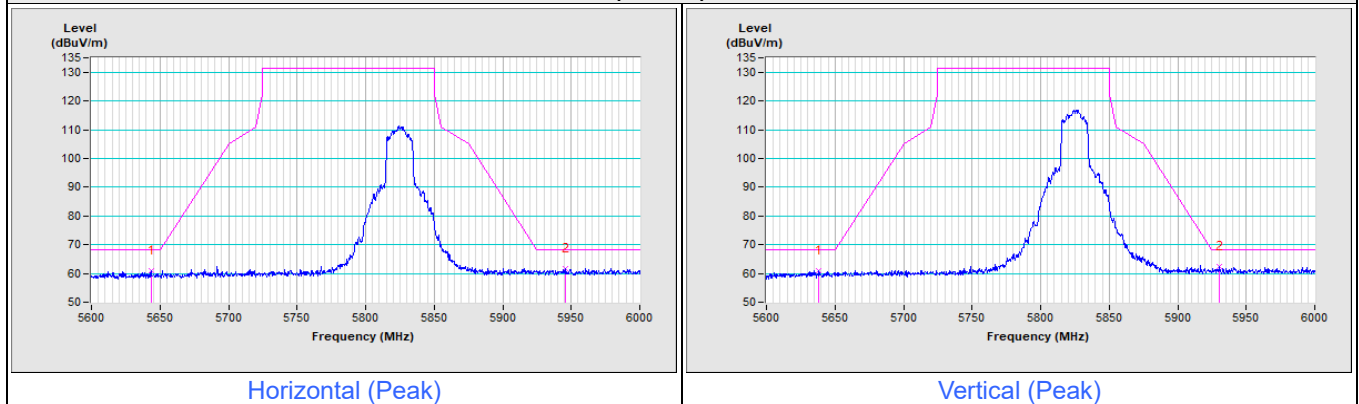


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT40) Channel 38

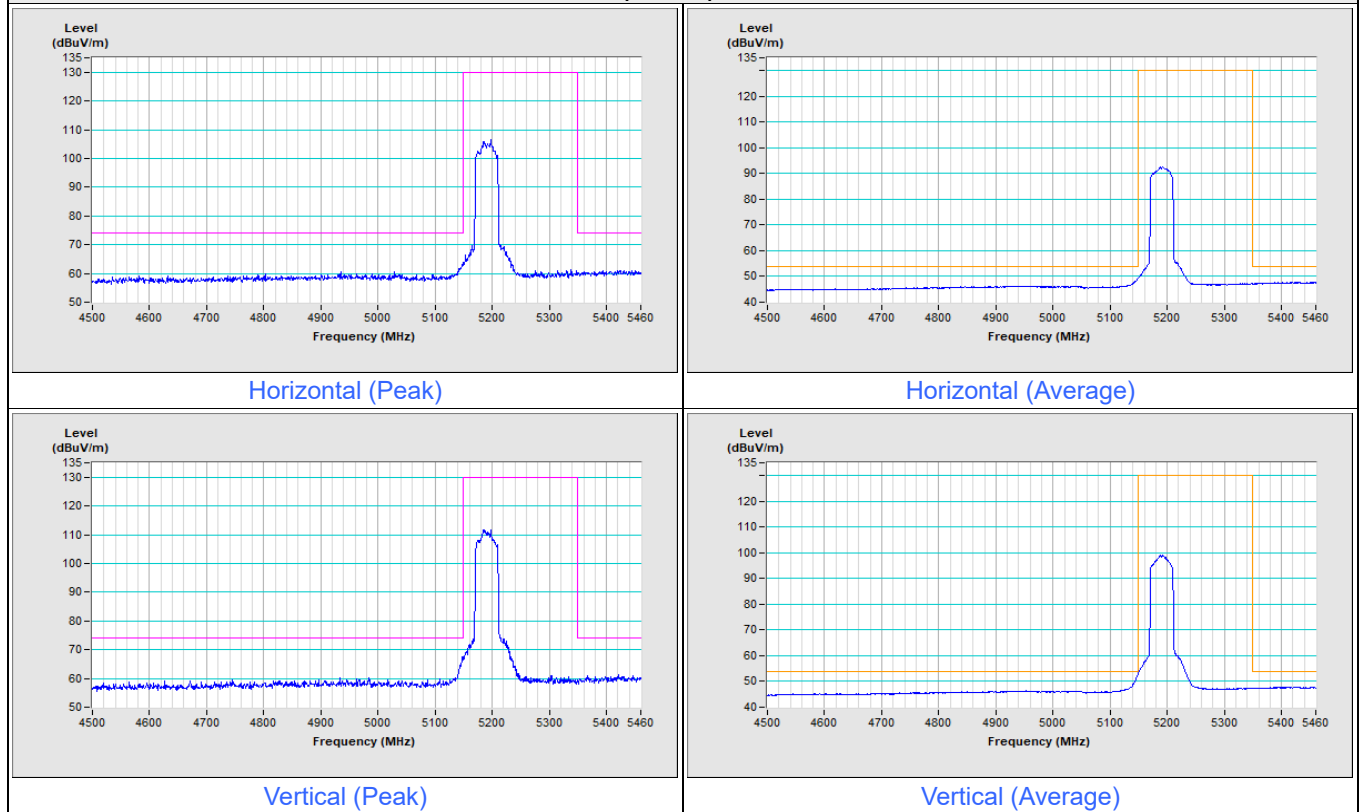


802.11be (EHT40) Channel 46

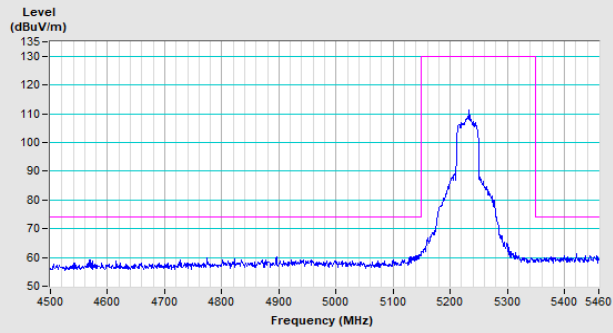


Horizontal (Peak)

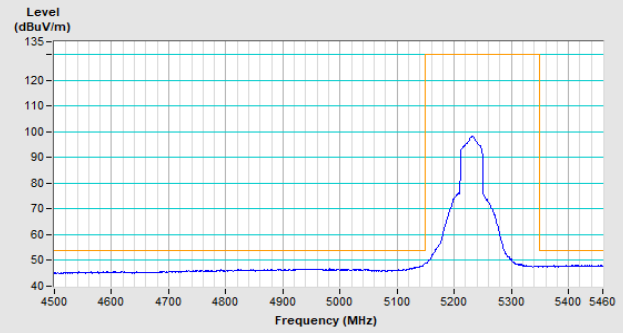

Horizontal (Average)

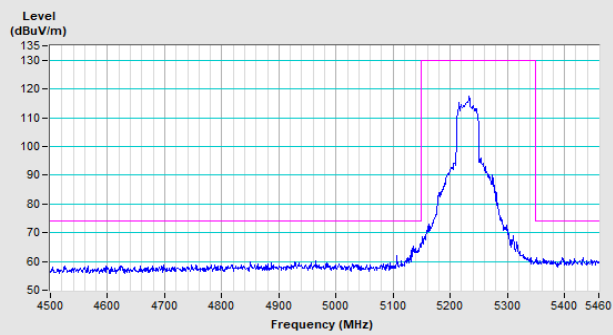


Vertical (Peak)

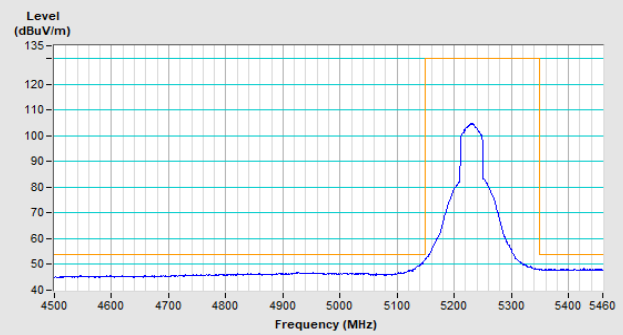


Vertical (Average)


802.11be (EHT40) Channel 54

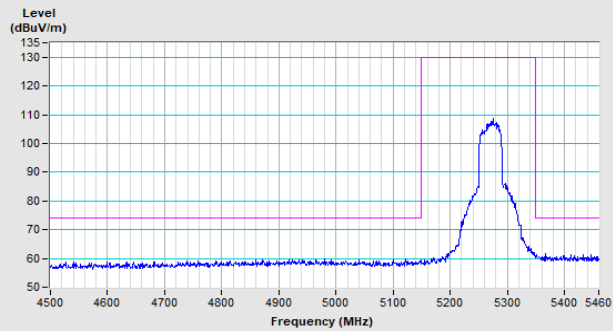


Horizontal (Peak)

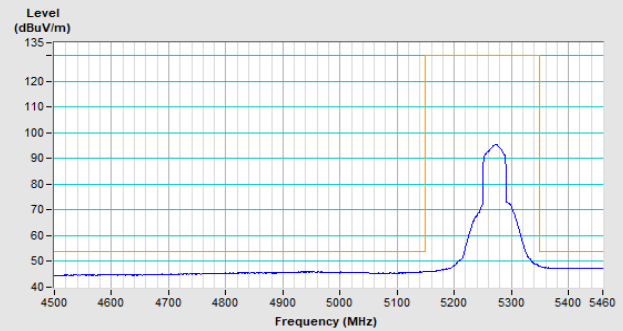

Horizontal (Average)

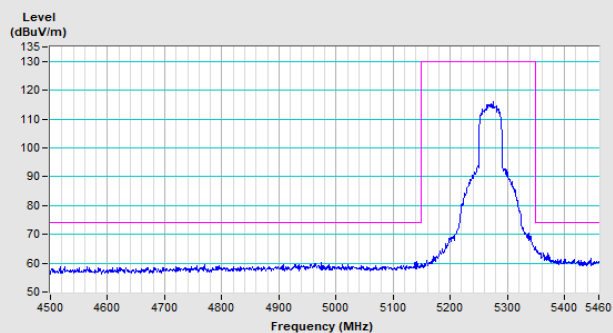


Vertical (Peak)

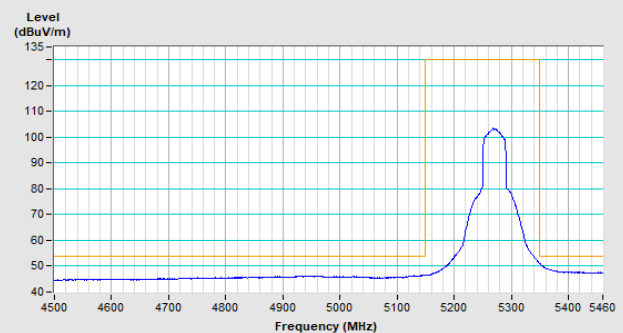


Vertical (Average)


802.11be (EHT40) Channel 62

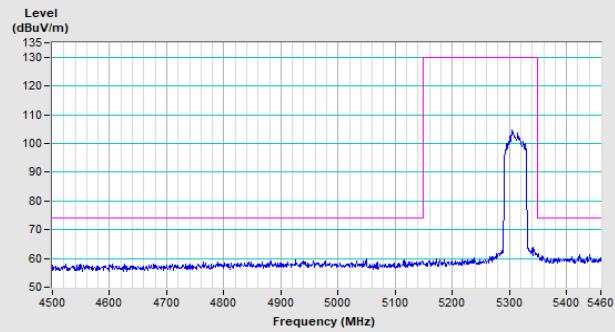


Horizontal (Peak)

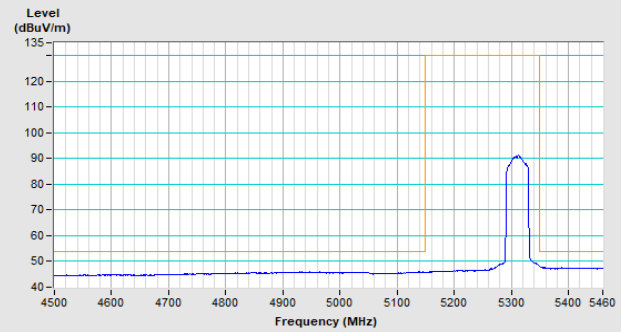

Horizontal (Average)

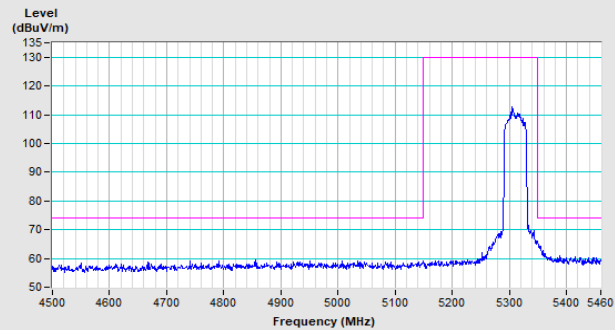


Vertical (Peak)

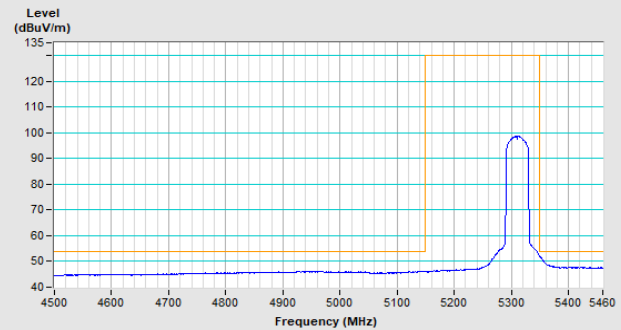


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 102

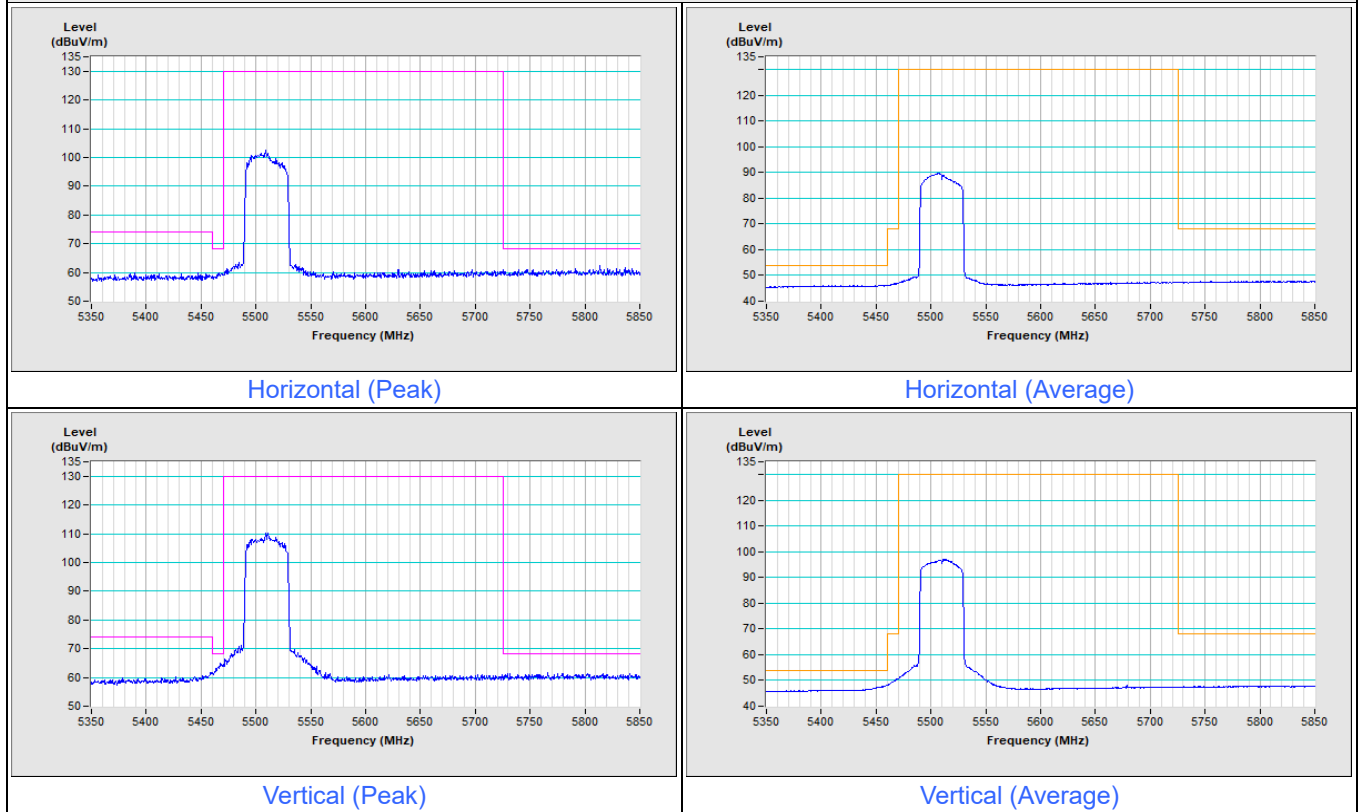


802.11be (EHT40) Channel 134

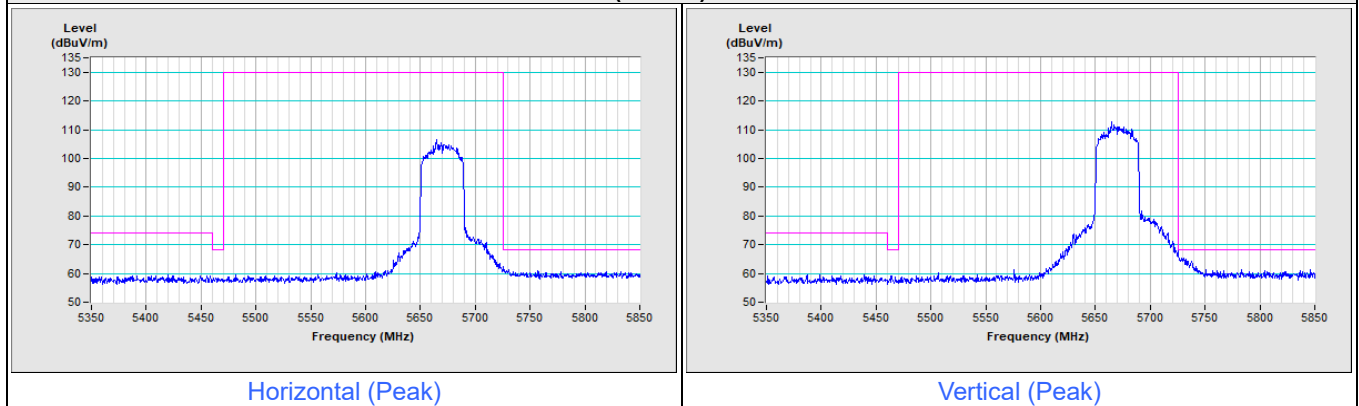


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 142

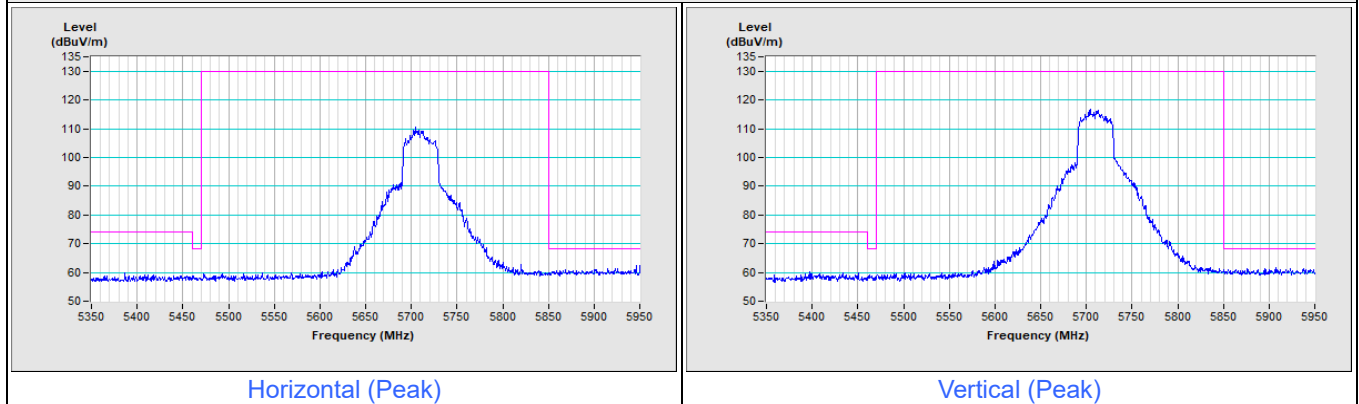


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT40) Channel 151

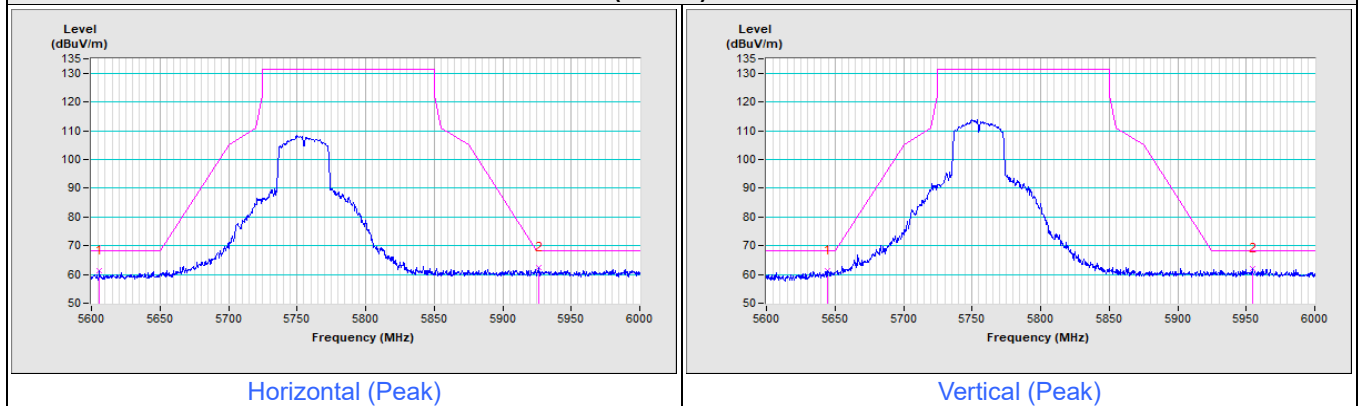


802.11be (EHT40) Channel 159

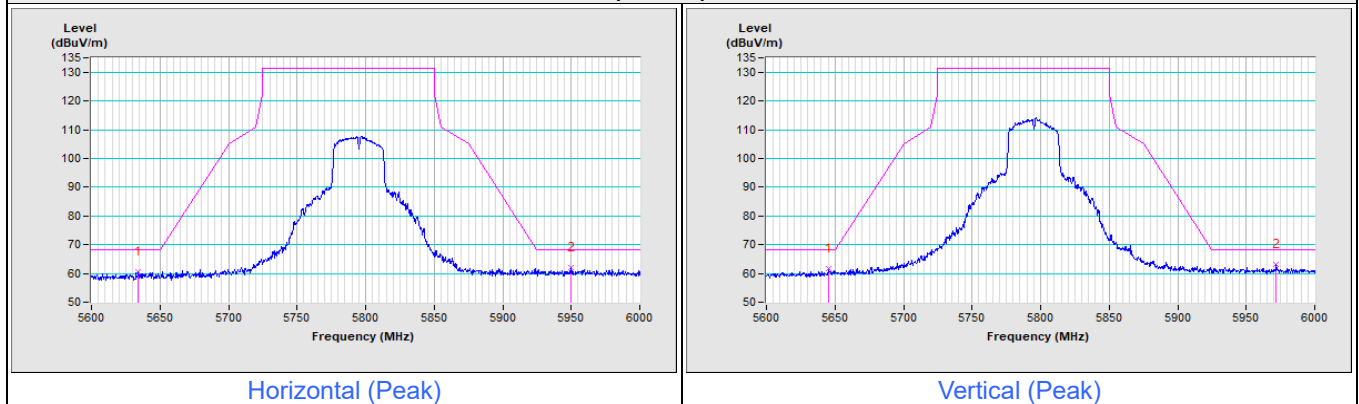


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) Channel 42

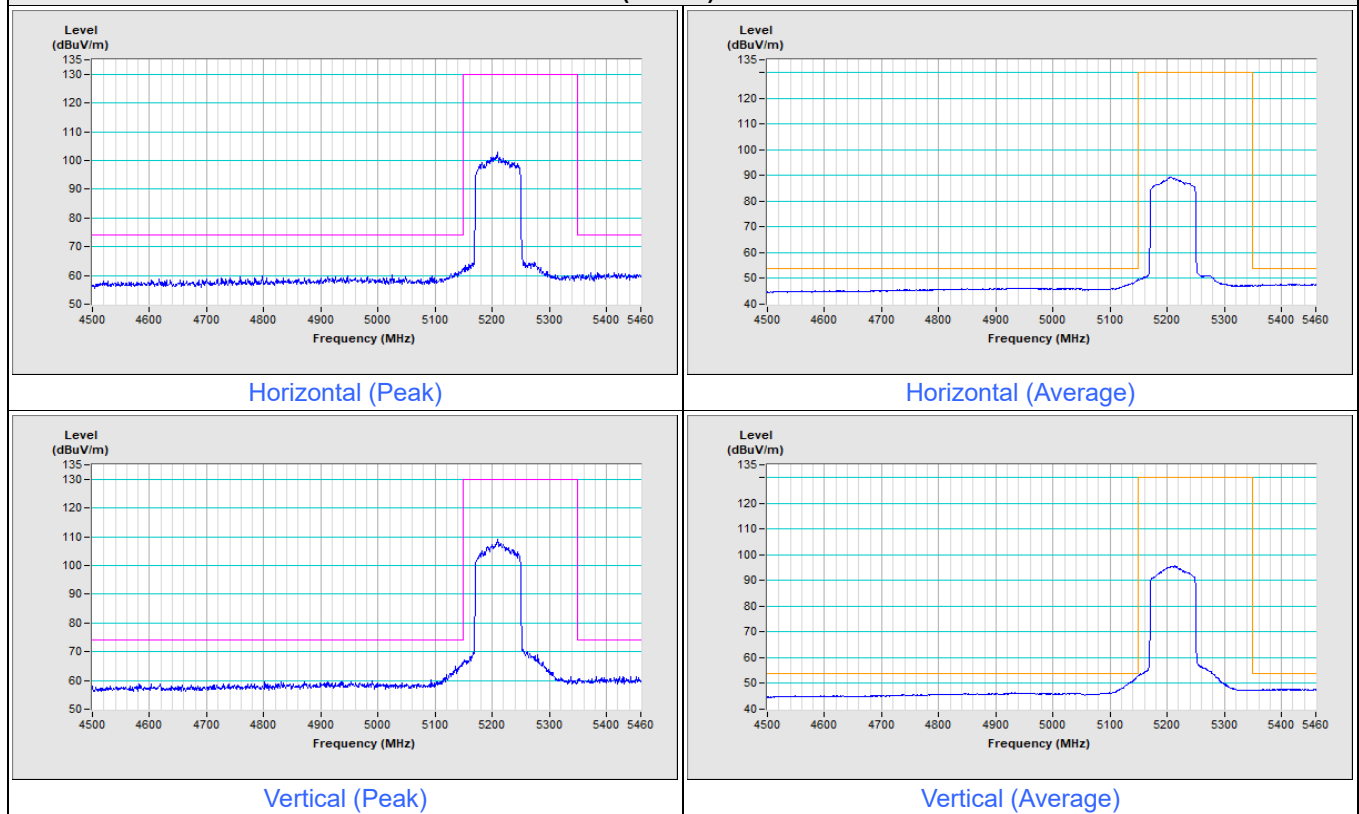


802.11be (EHT80) Channel 58

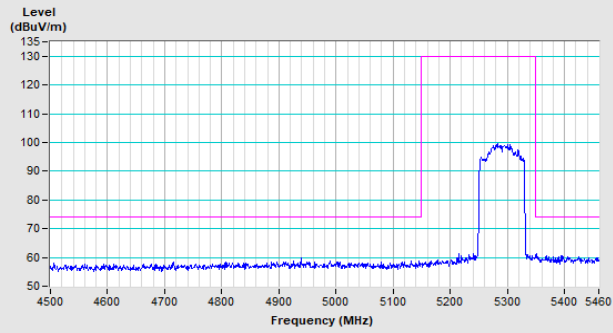


Horizontal (Peak)

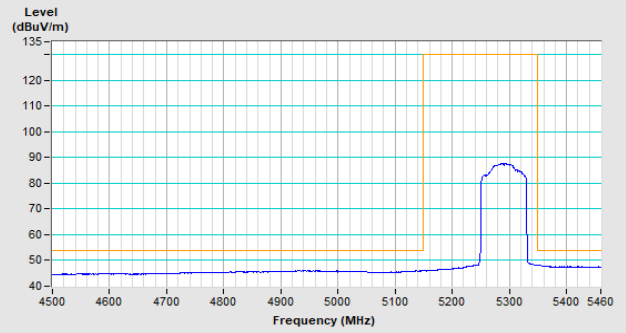

Horizontal (Average)

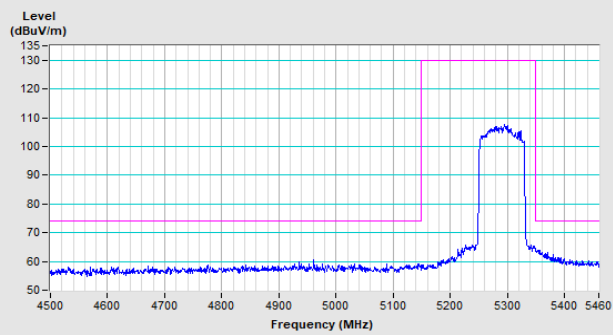


Vertical (Peak)

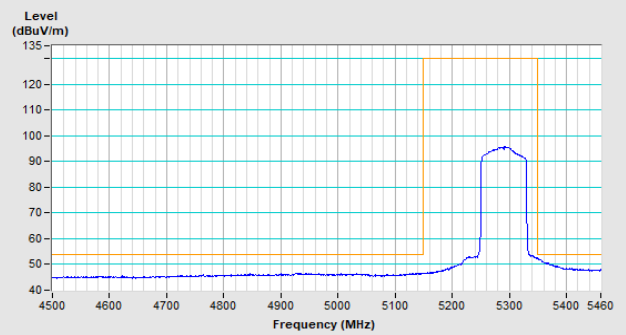


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 106

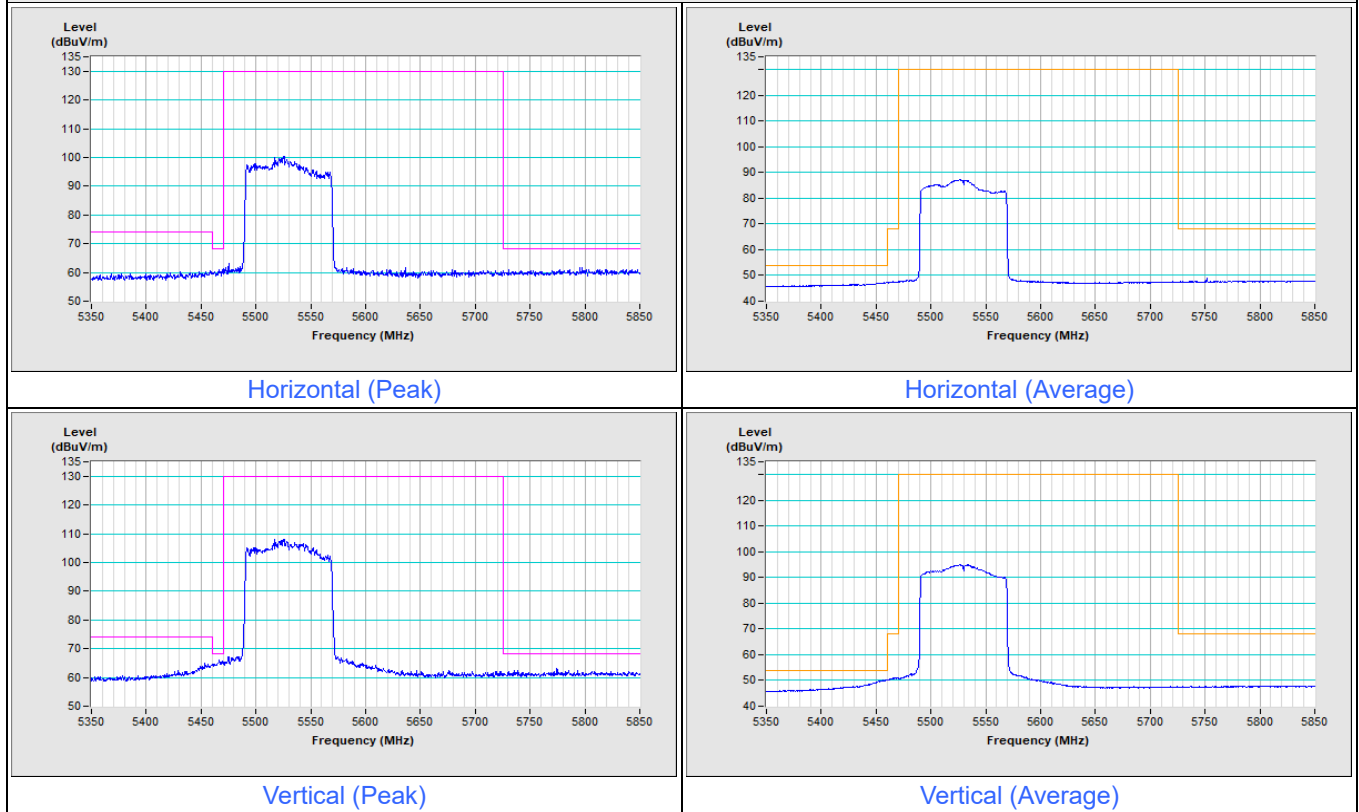


802.11be (EHT80) Channel 122

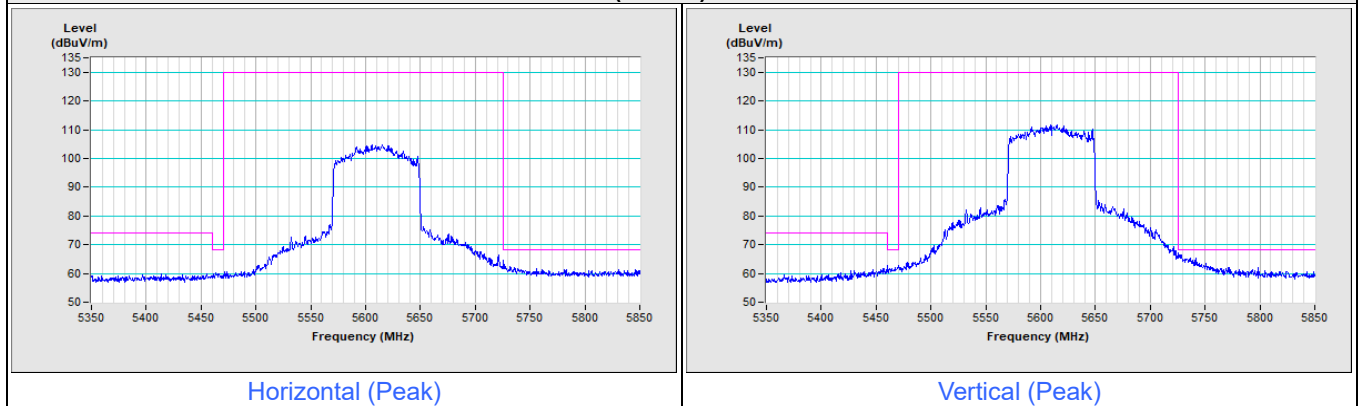

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

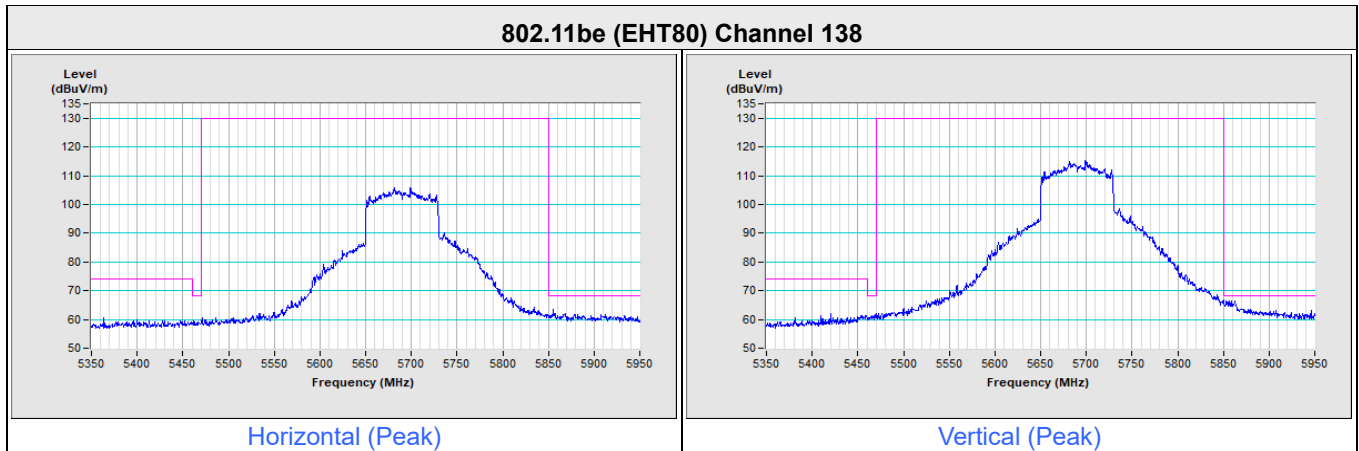


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

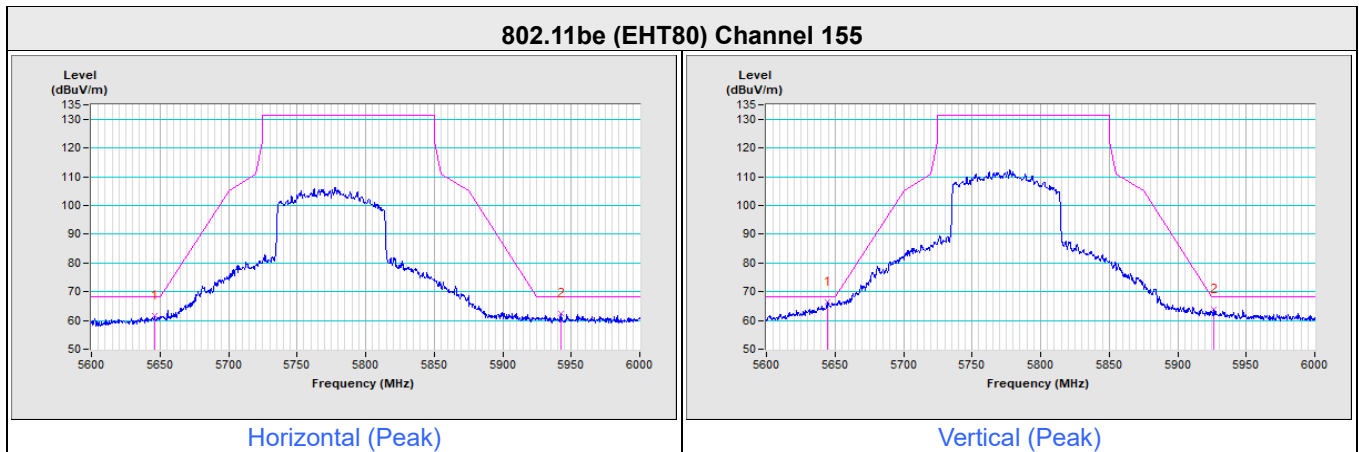


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) Channel 50

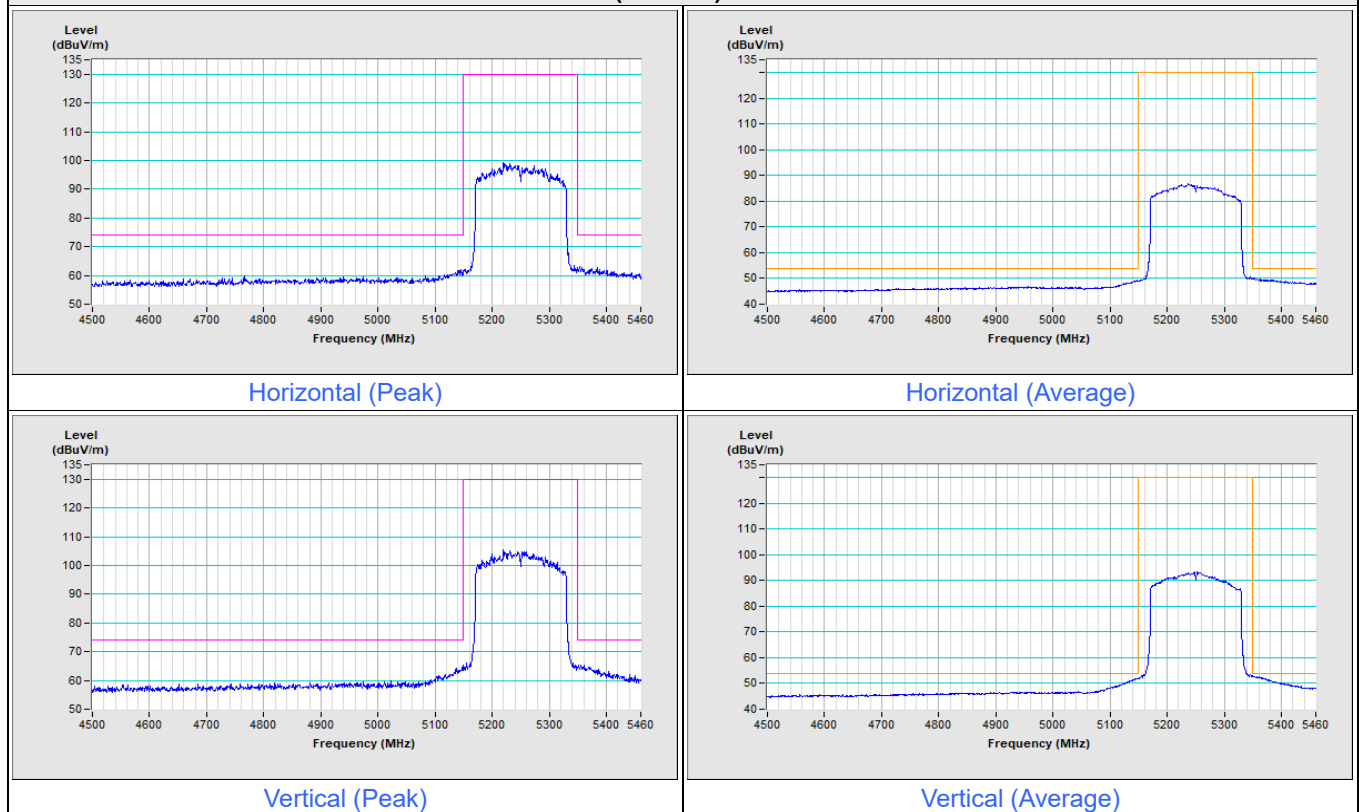


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) Channel 114

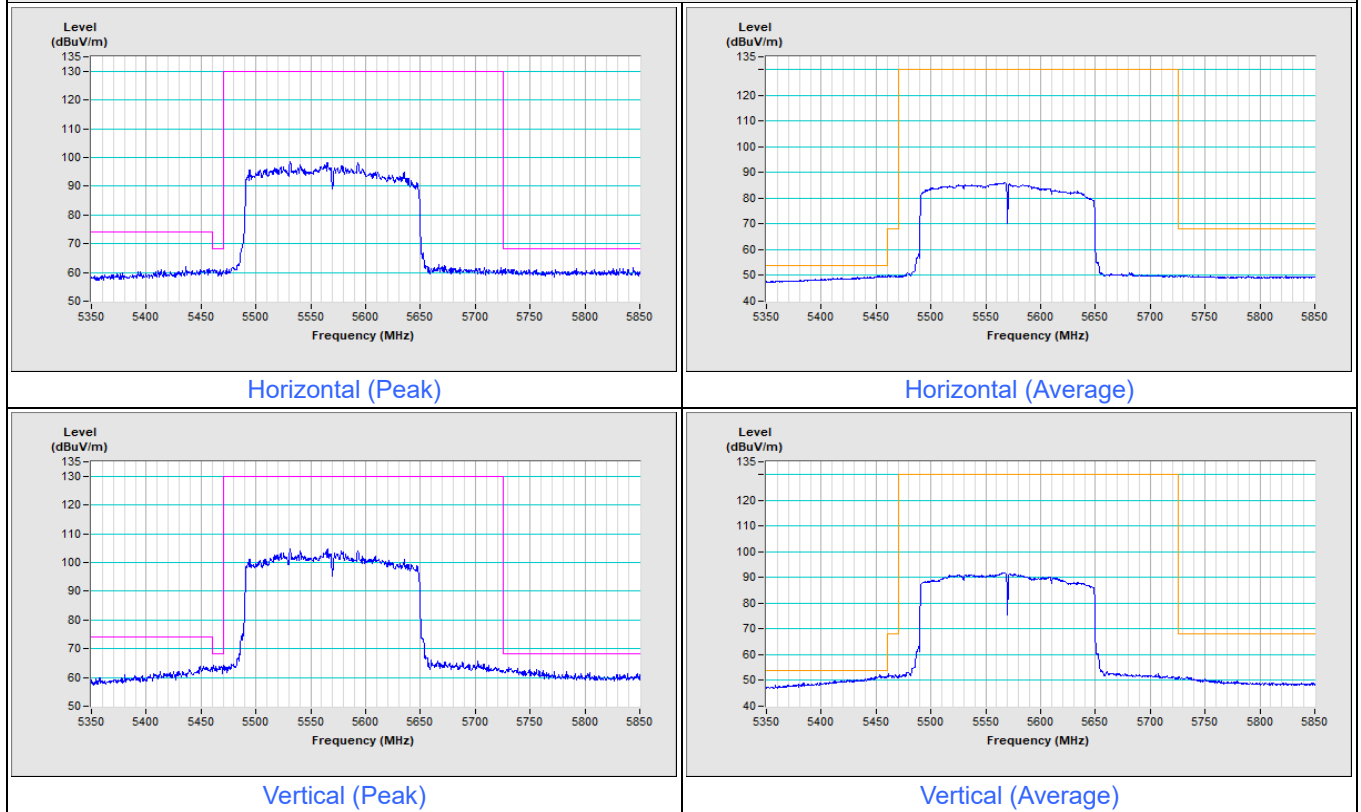


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 26-tone RU Channel 36

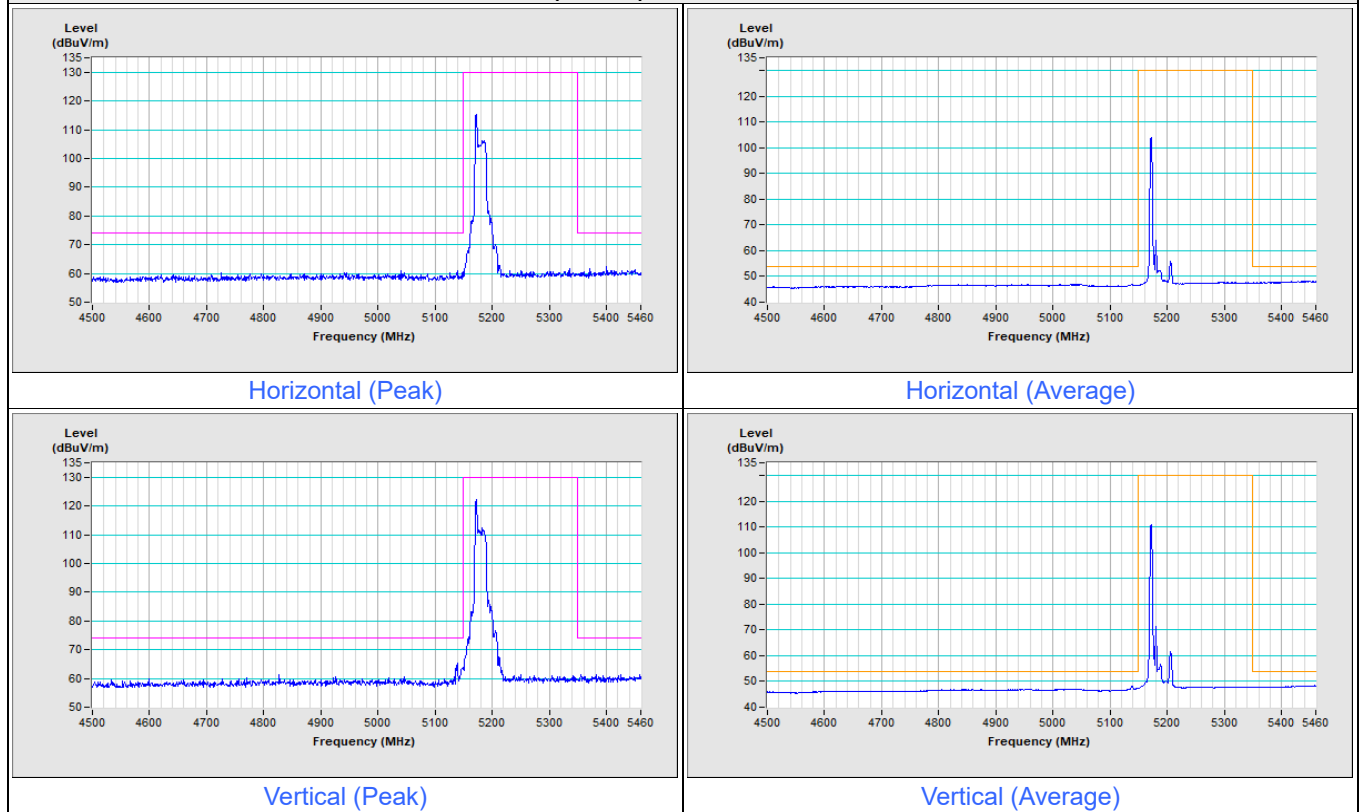


802.11be (EHT20) 26-tone RU Channel 48

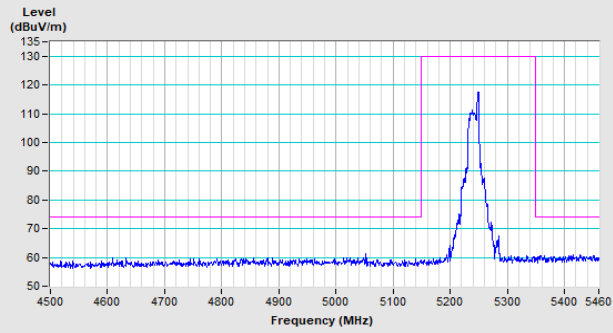


Horizontal (Peak)

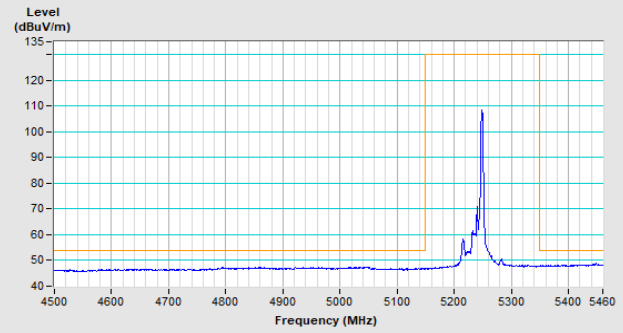

Horizontal (Average)

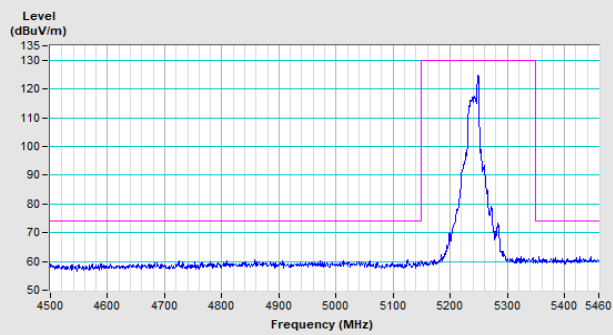


Vertical (Peak)

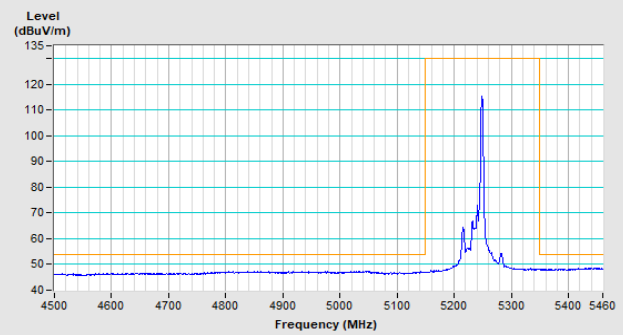


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 52

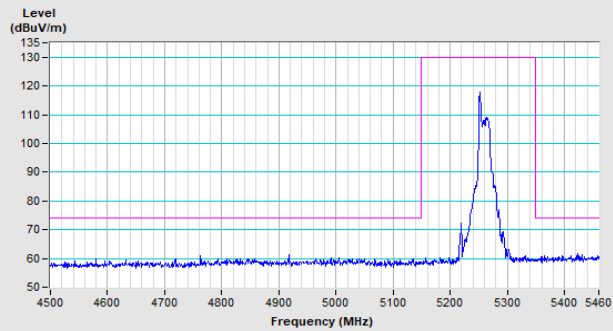


Horizontal (Peak)

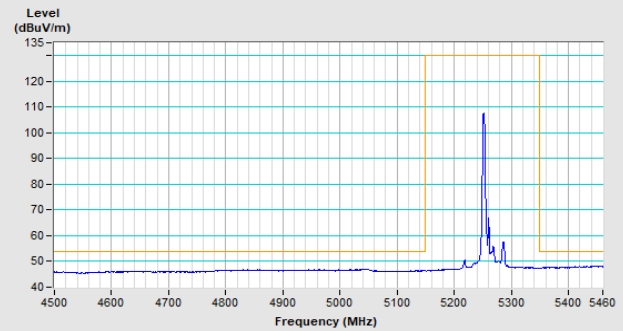

Horizontal (Average)

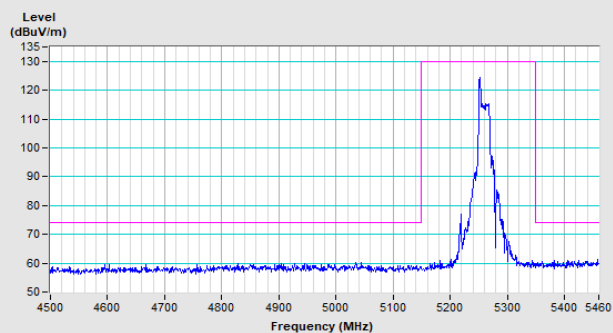


Vertical (Peak)

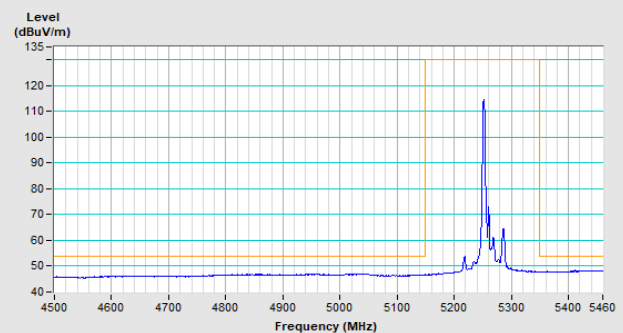


Vertical (Average)


802.11be (EHT20) 26-tone RU Channel 64

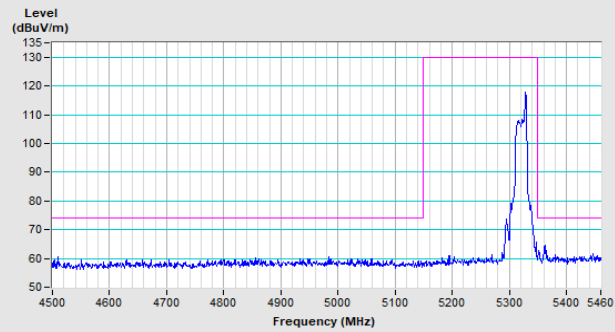


Horizontal (Peak)

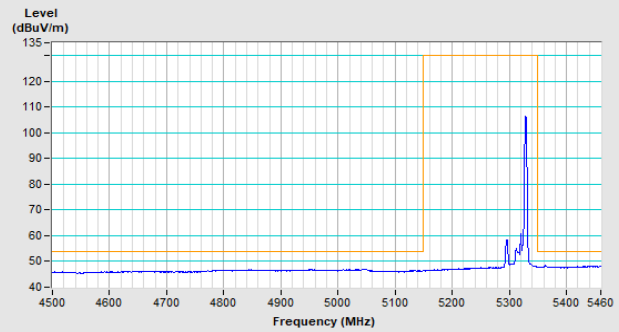

Horizontal (Average)

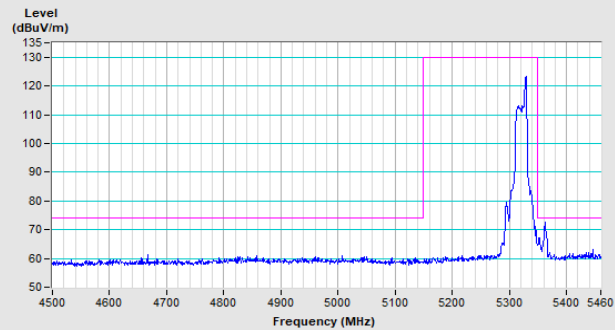


Vertical (Peak)

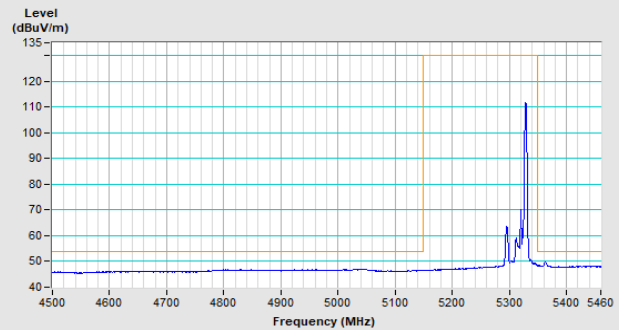


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 26-tone RU Channel 100

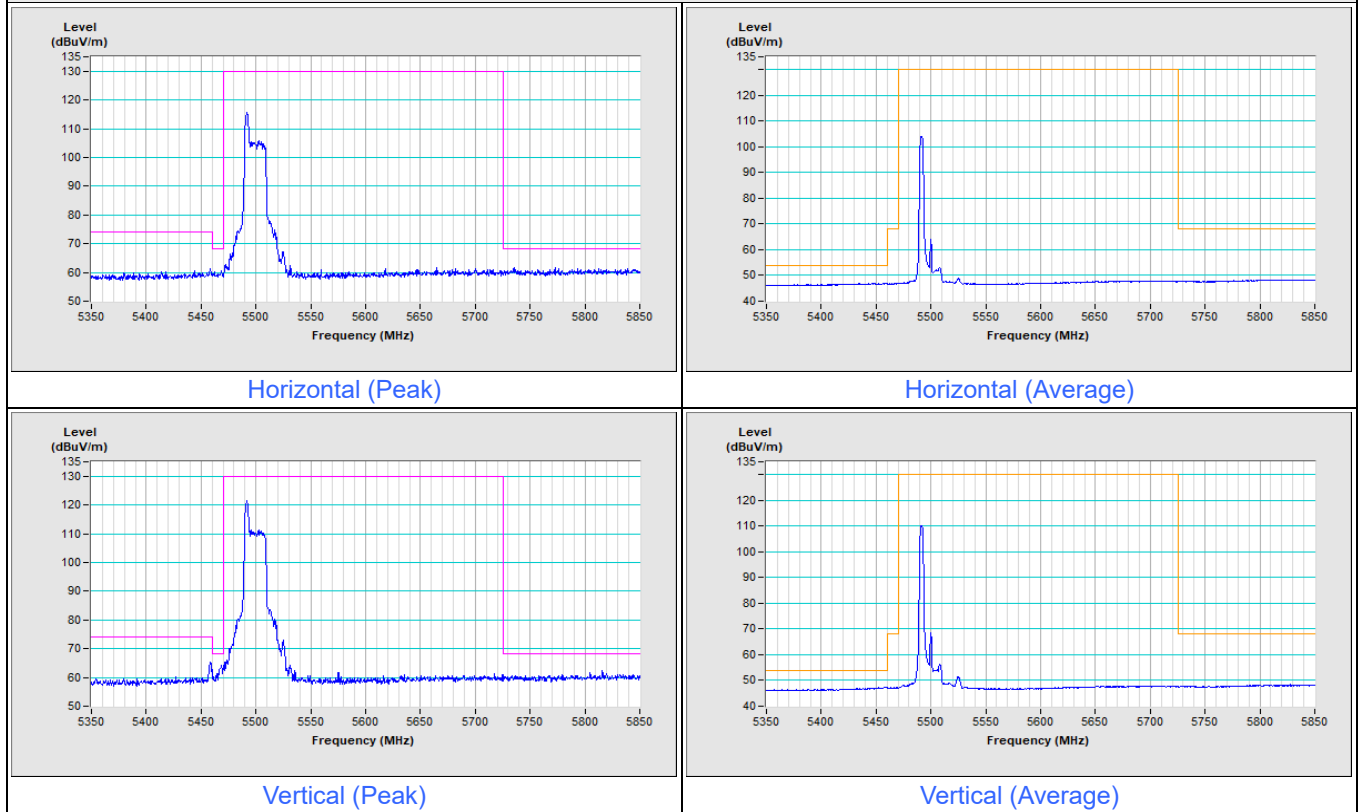


802.11be (EHT20) 26-tone RU Channel 140

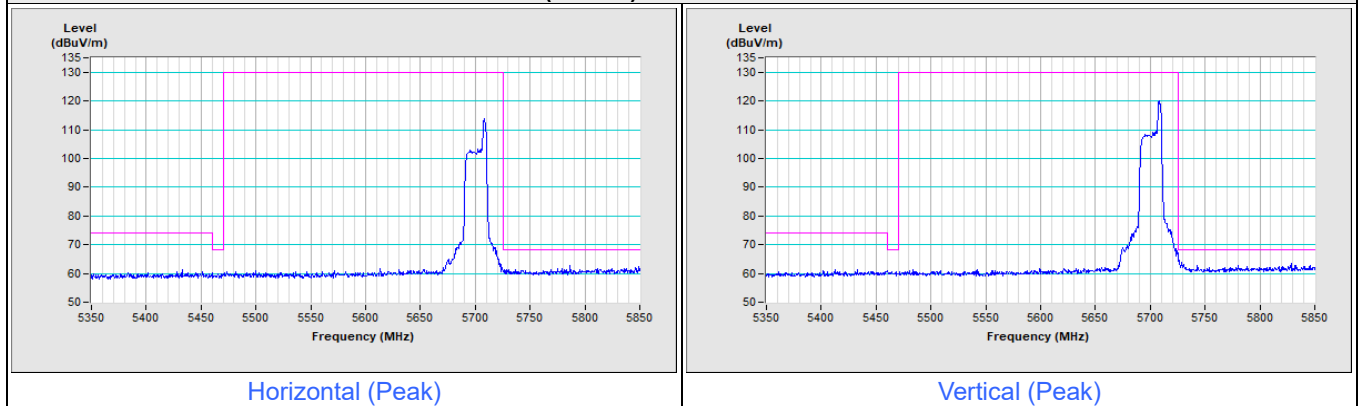


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) 26-tone RU Channel 144

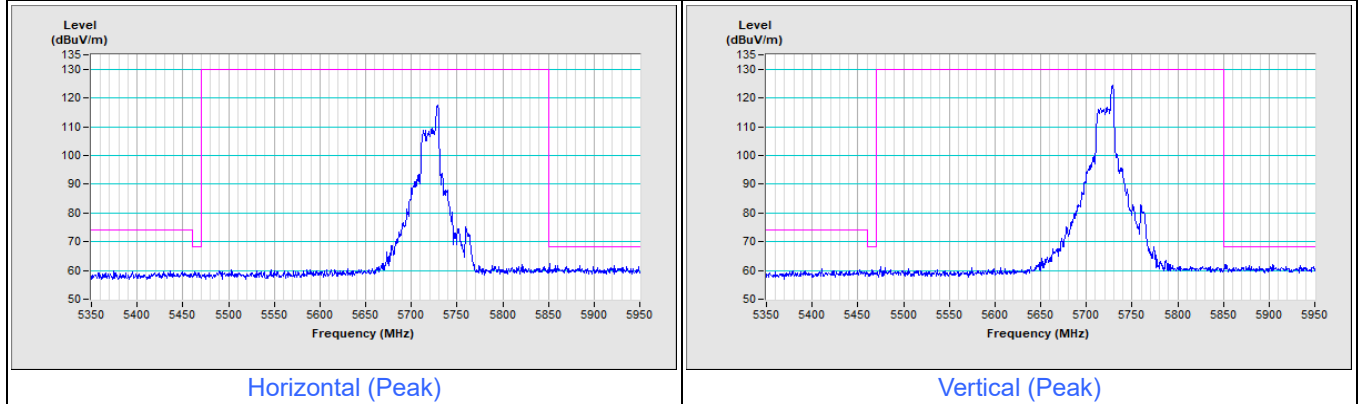


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 26-tone RU Channel 149

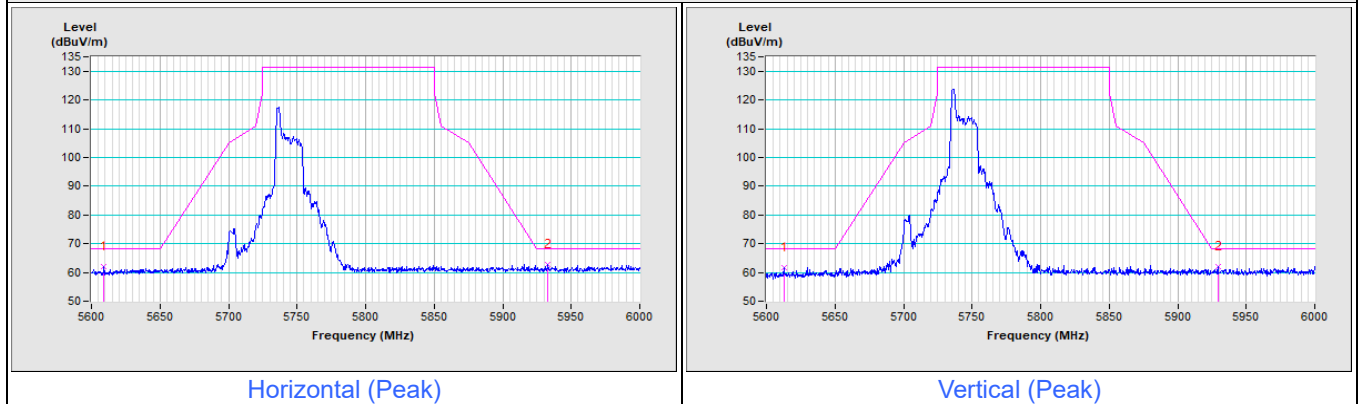

802.11be (EHT20) 26-tone RU Channel 157

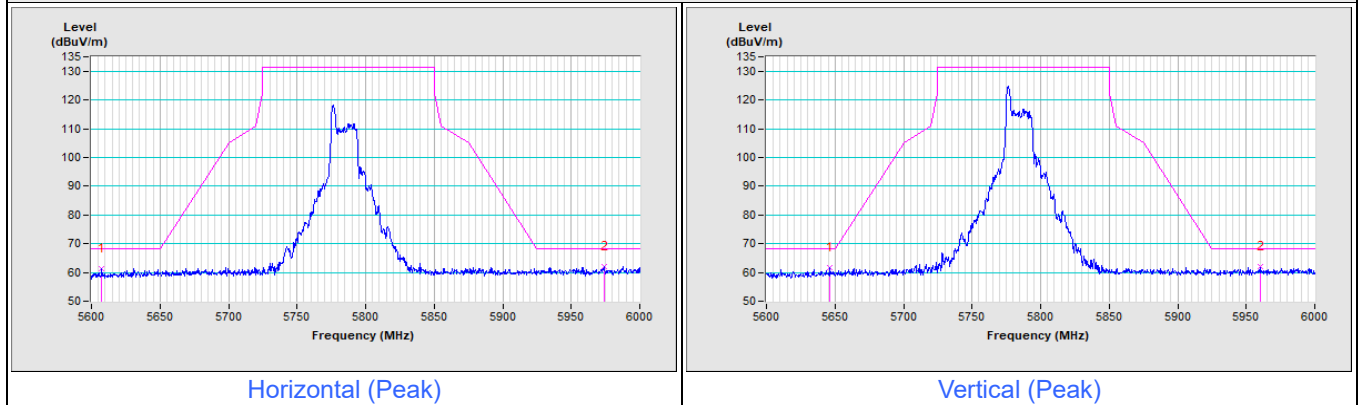


802.11be (EHT20) 26-tone RU Channel 165

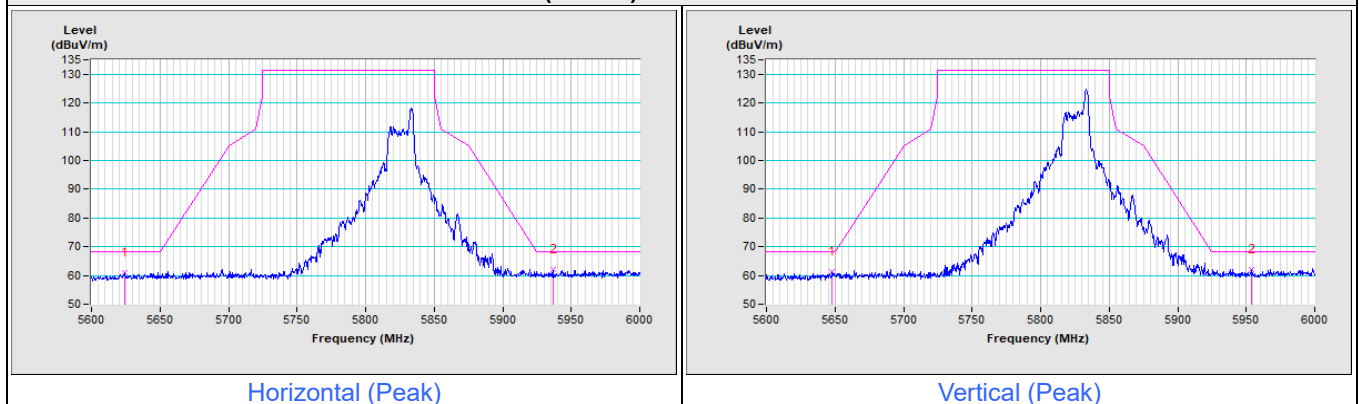


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 52-tone RU Channel 36

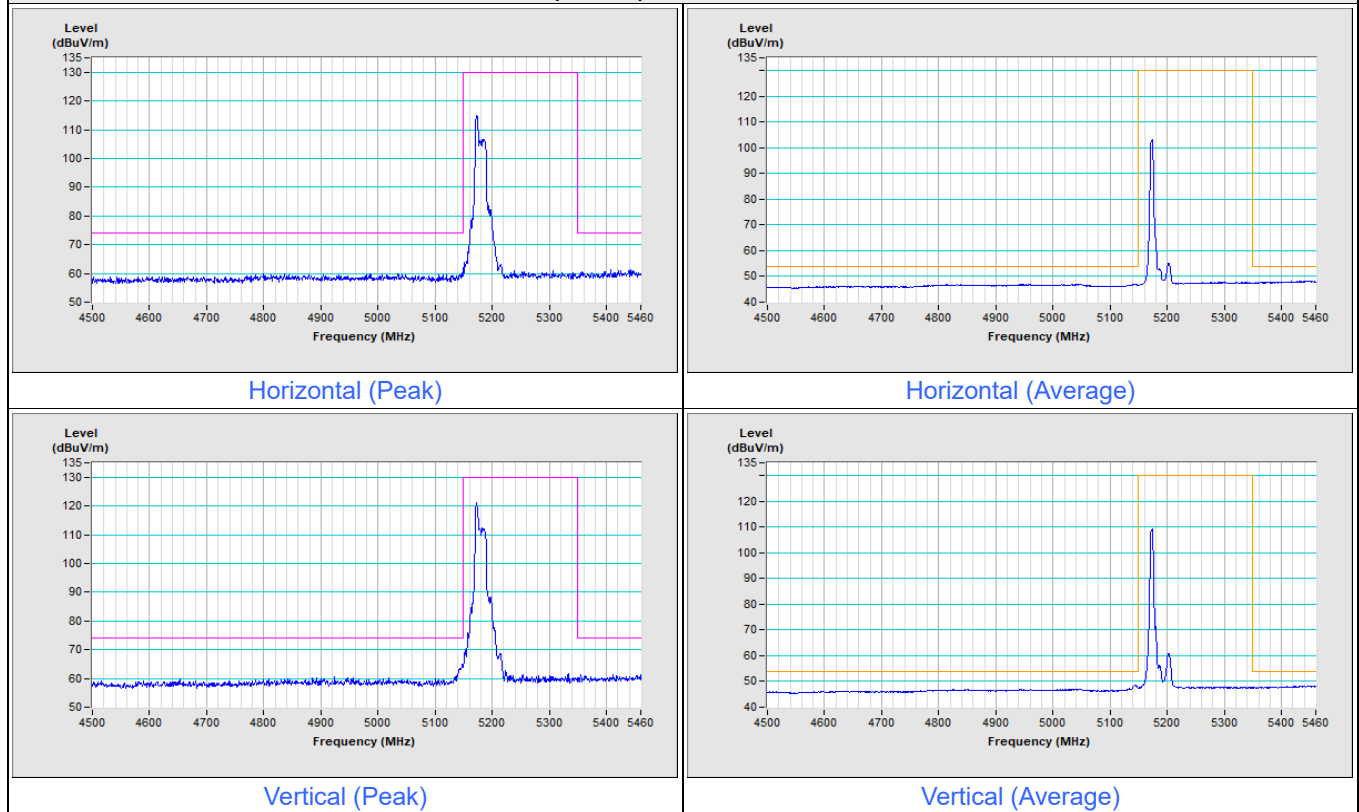


802.11be (EHT20) 52-tone RU Channel 48

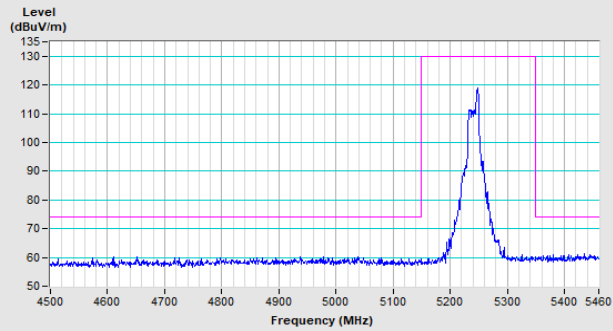


Horizontal (Peak)

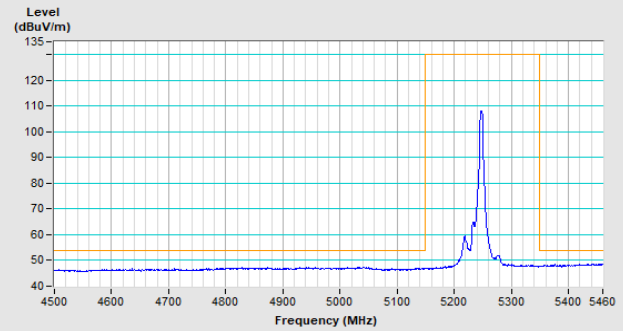

Horizontal (Average)

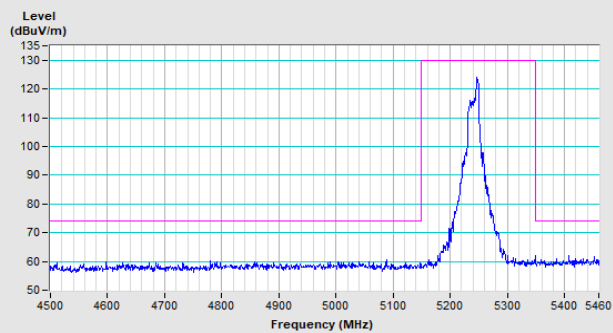


Vertical (Peak)

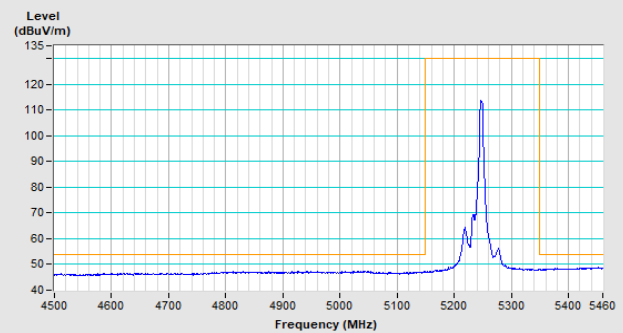


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 52

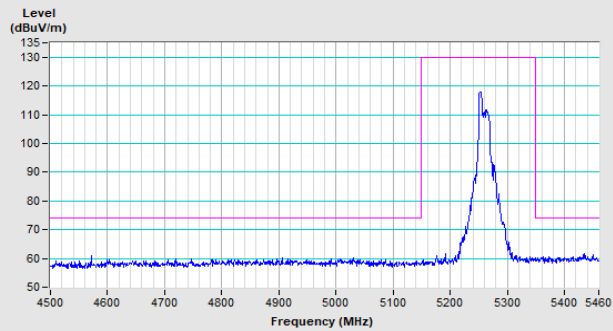


Horizontal (Peak)

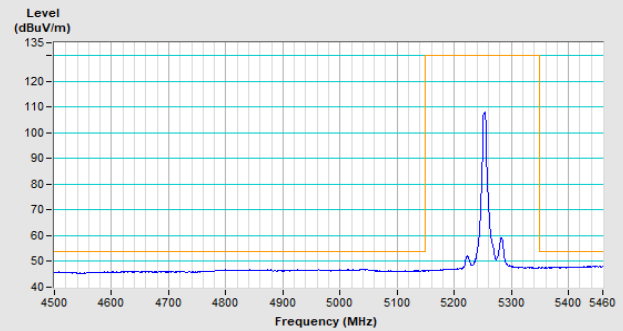

Horizontal (Average)

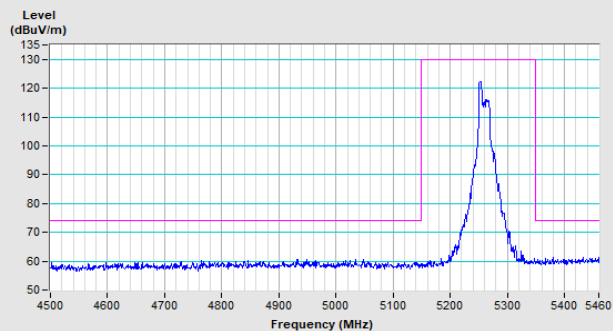


Vertical (Peak)

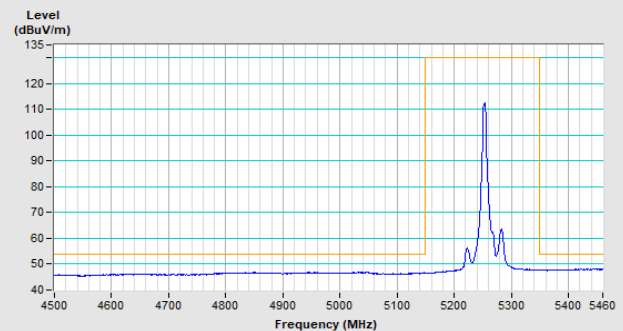


Vertical (Average)


802.11be (EHT20) 52-tone RU Channel 64

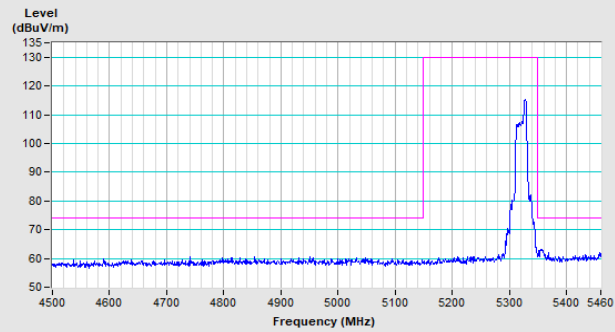


Horizontal (Peak)

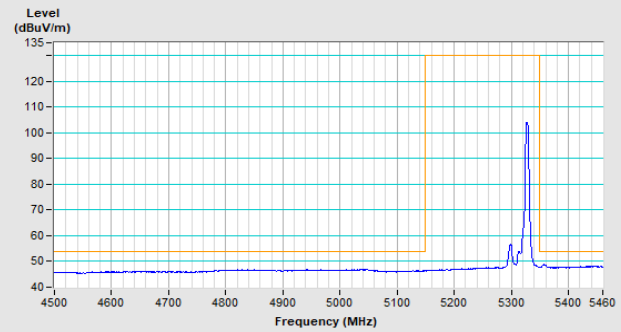

Horizontal (Average)

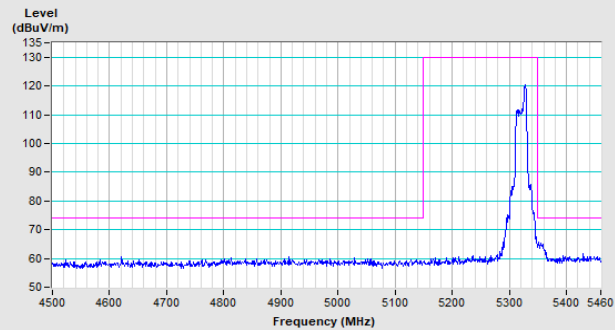


Vertical (Peak)

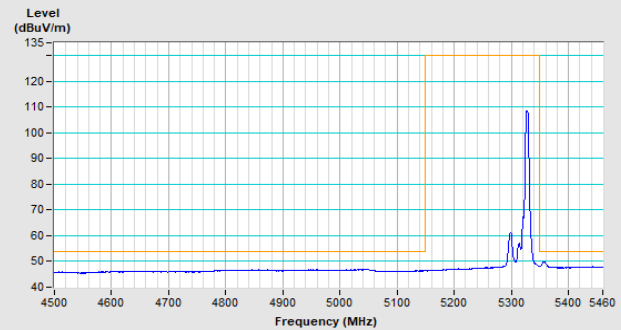


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 52-tone RU Channel 100

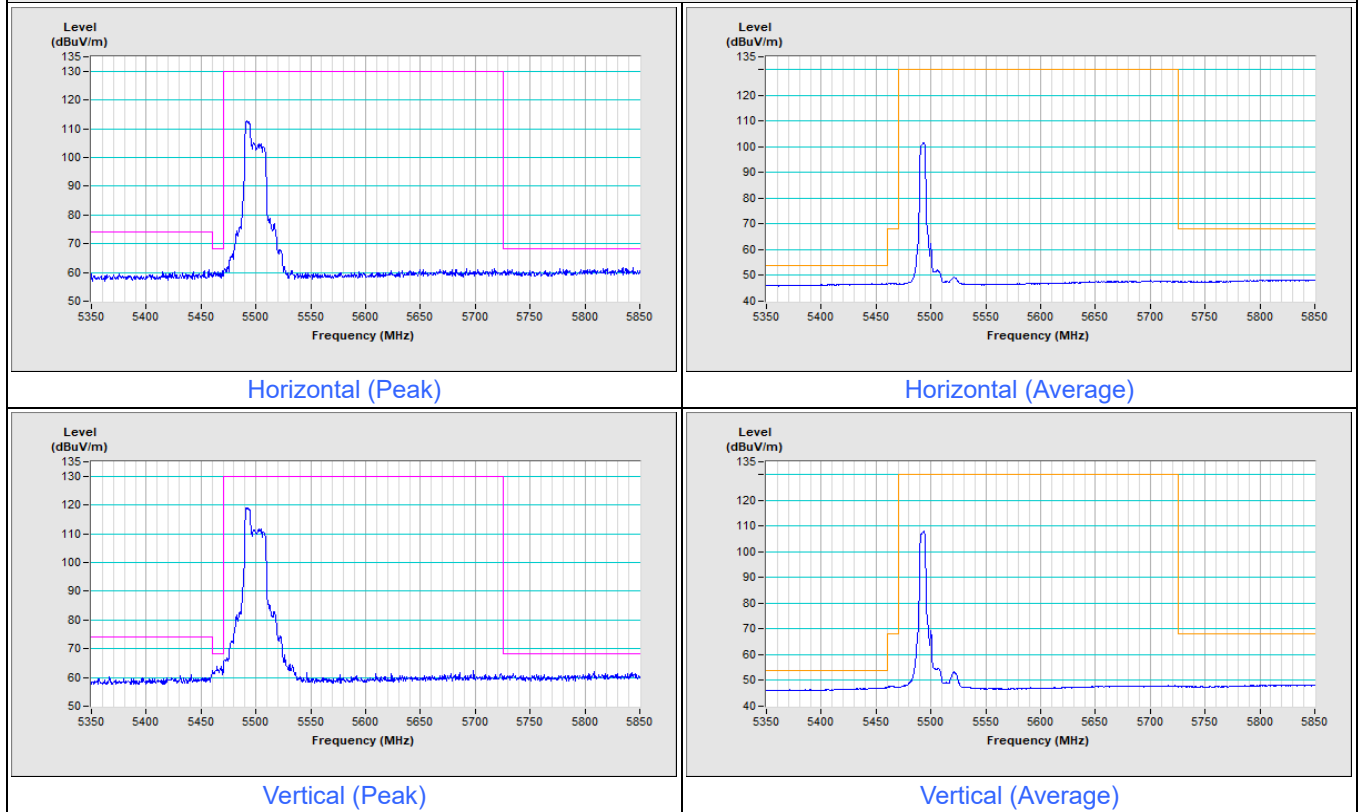


802.11be (EHT20) 52-tone RU Channel 140

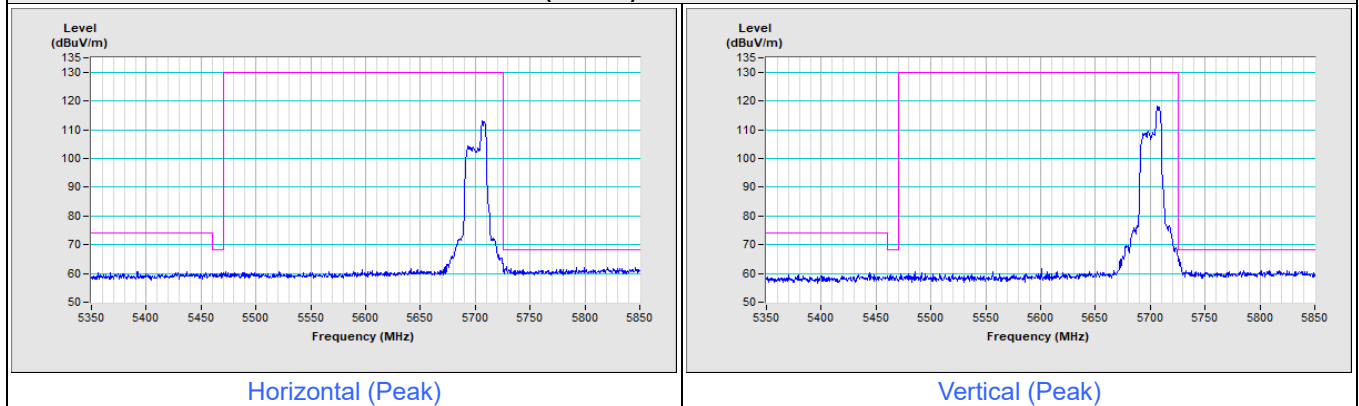


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) 52-tone RU Channel 144

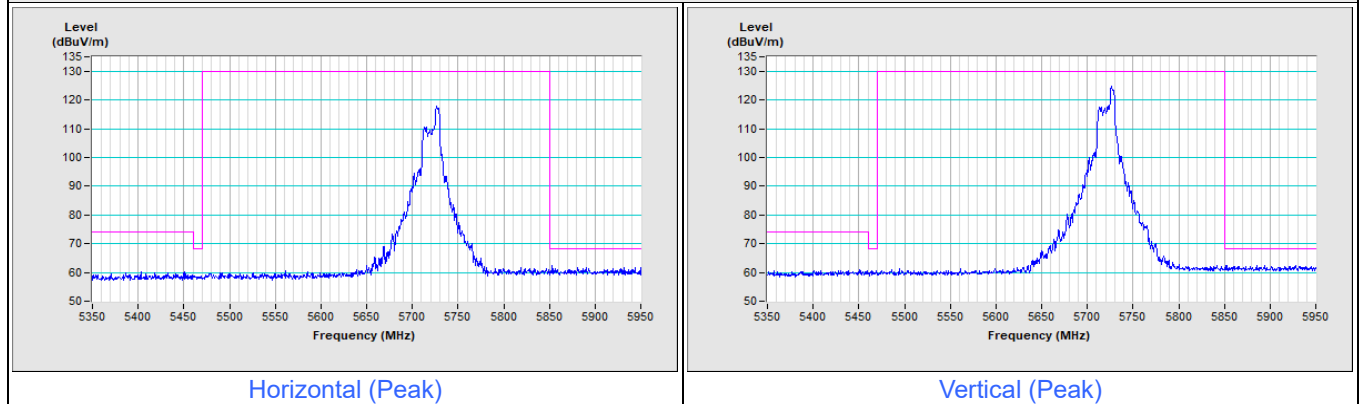


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 52-tone RU Channel 149

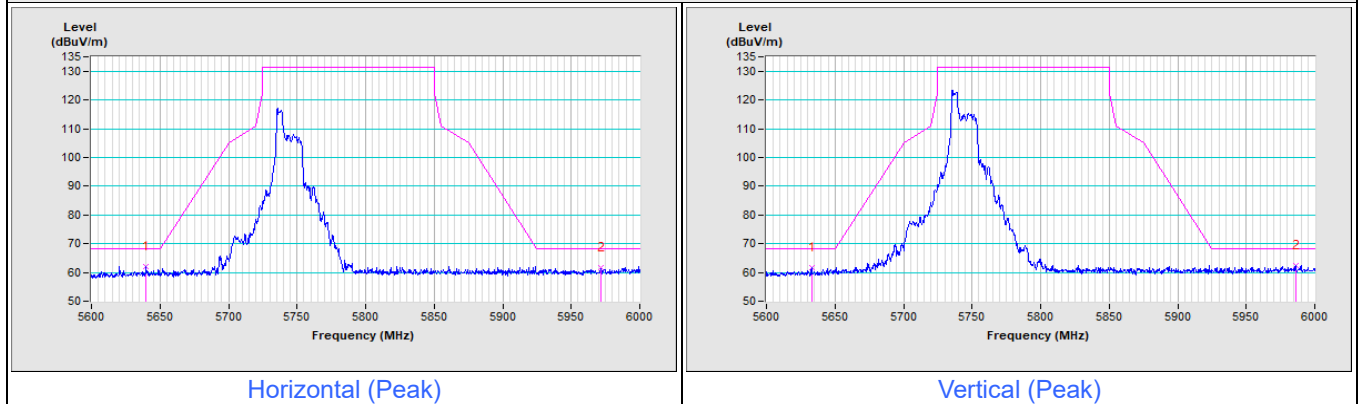

802.11be (EHT20) 52-tone RU Channel 157

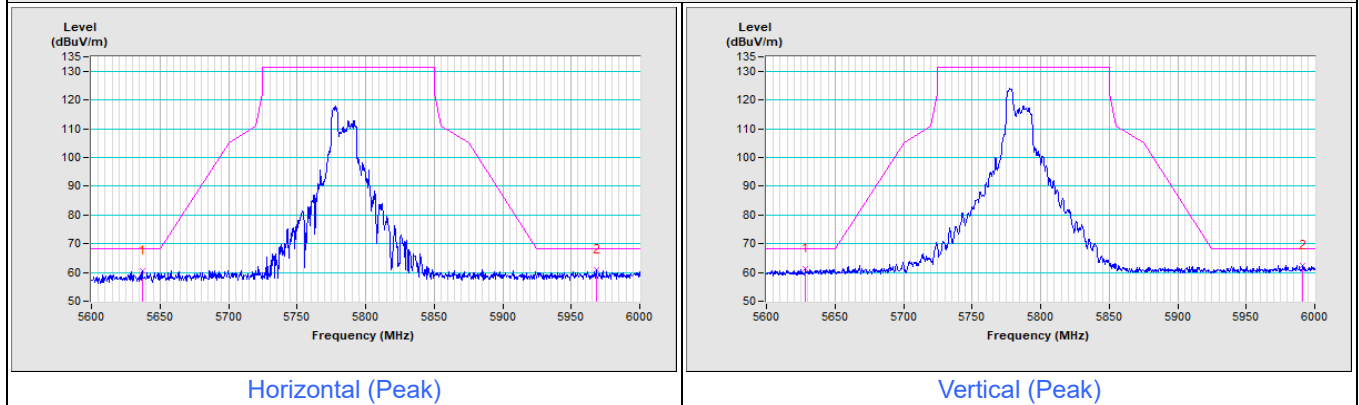


802.11be (EHT20) 52-tone RU Channel 165

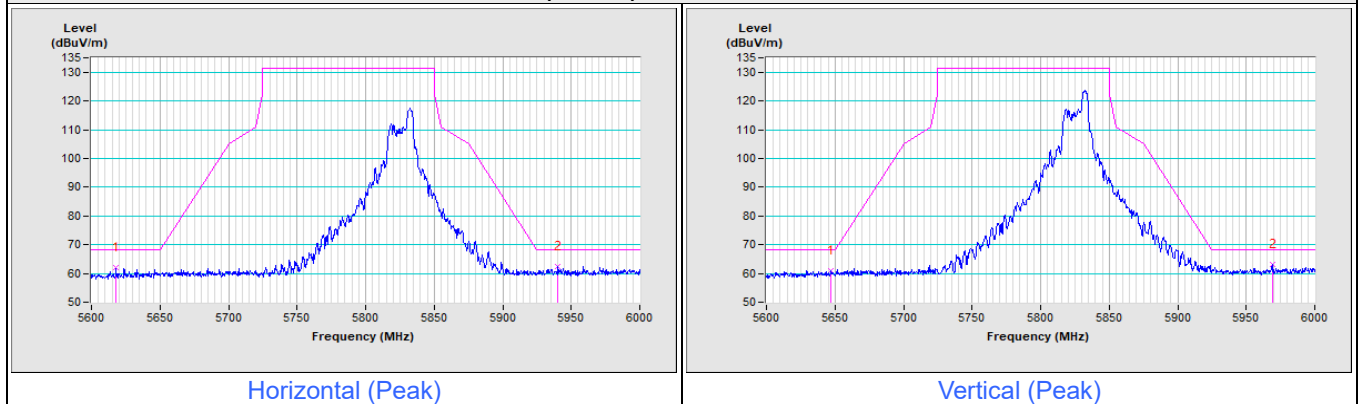


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT20) 106-tone RU Channel 36

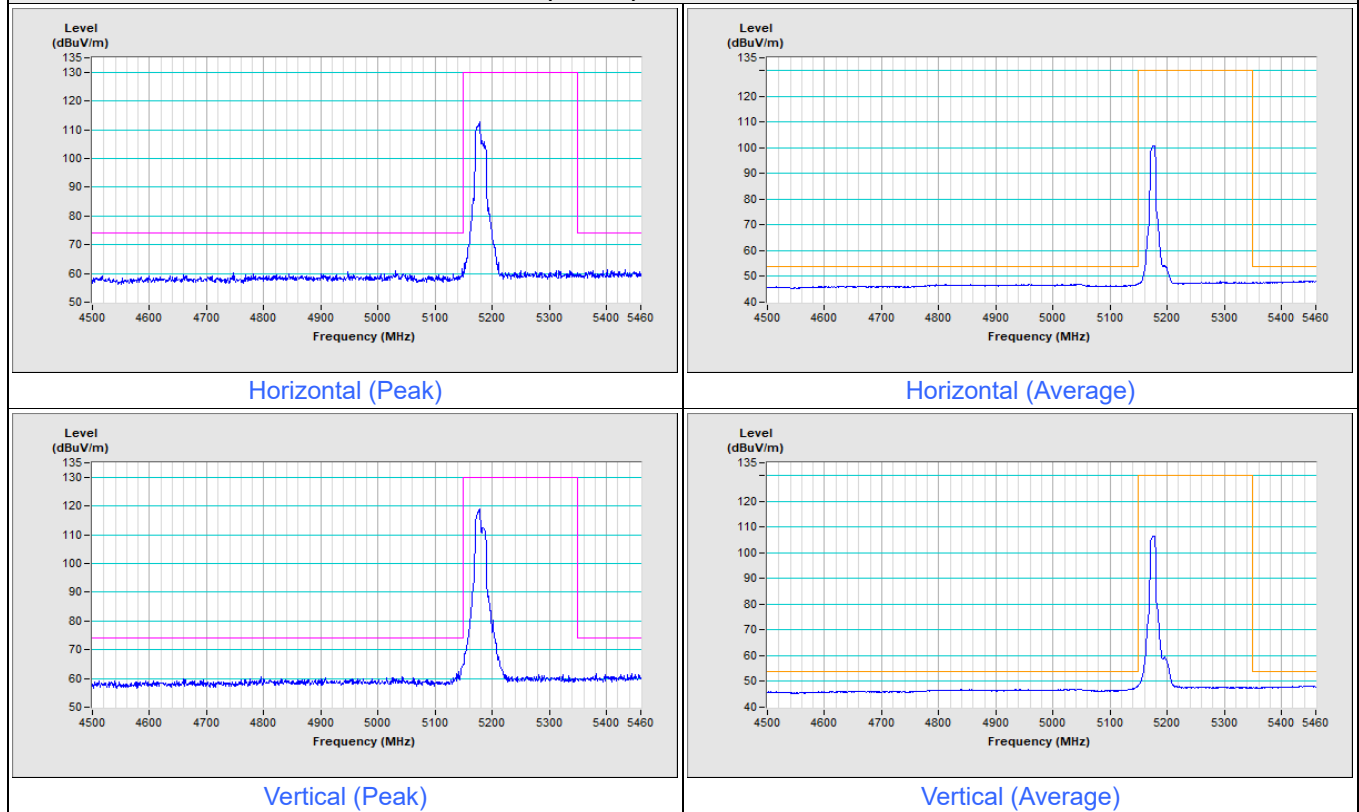


802.11be (EHT20) 106-tone RU Channel 48

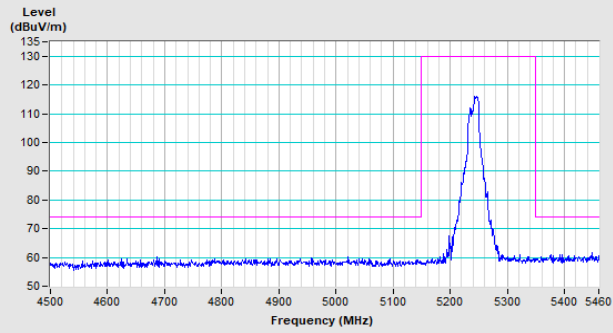


Horizontal (Peak)

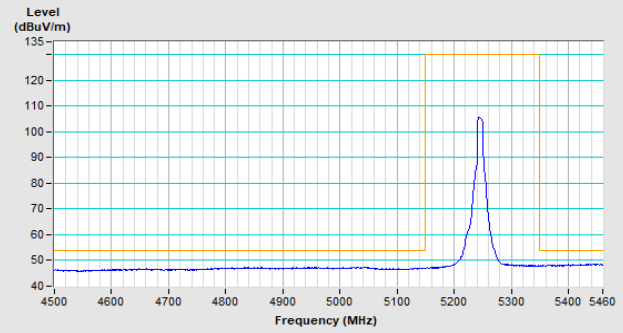

Horizontal (Average)

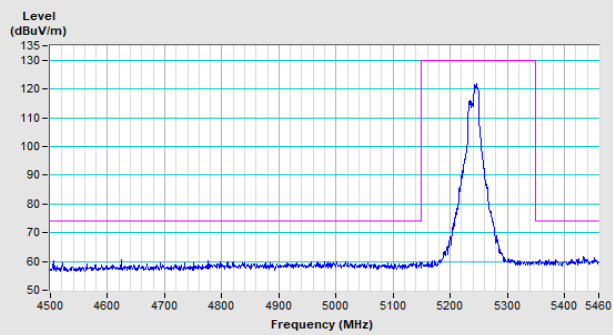


Vertical (Peak)

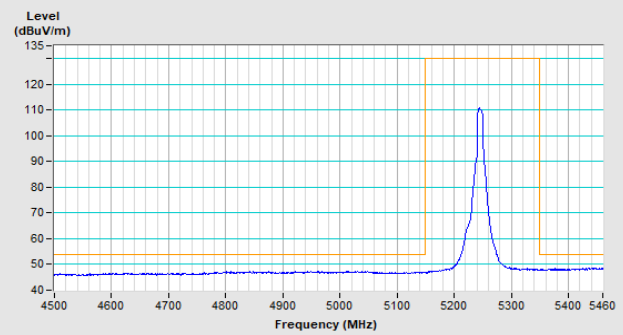


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 52

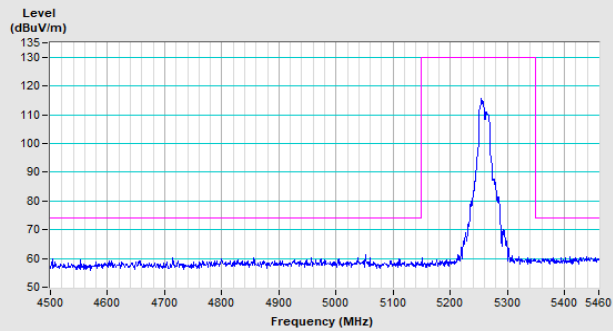


Horizontal (Peak)

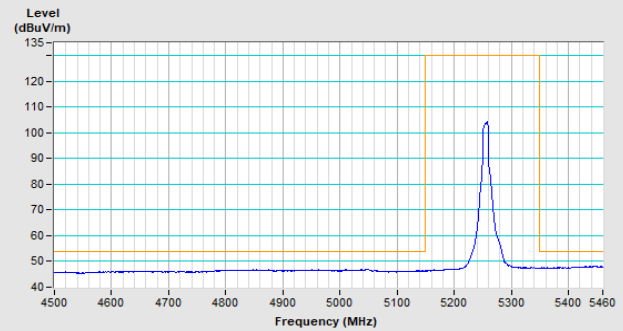

Horizontal (Average)

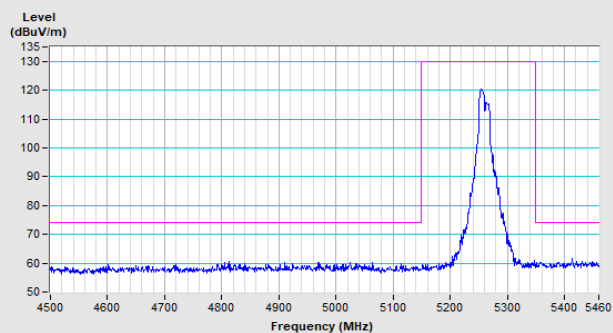


Vertical (Peak)

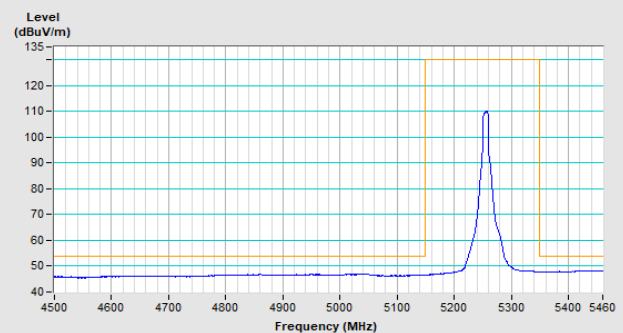


Vertical (Average)


802.11be (EHT20) 106-tone RU Channel 64

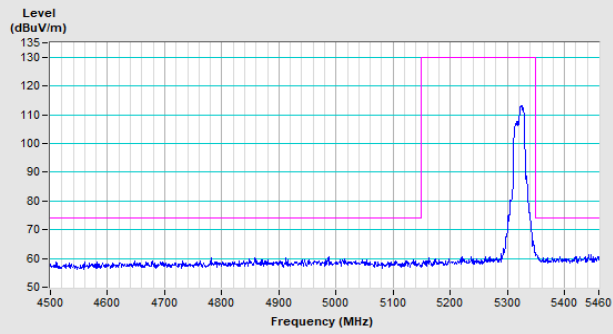


Horizontal (Peak)

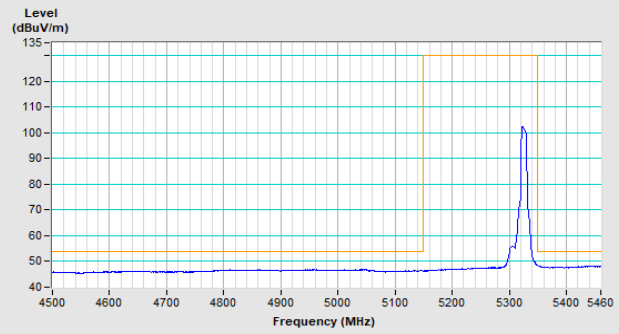

Horizontal (Average)

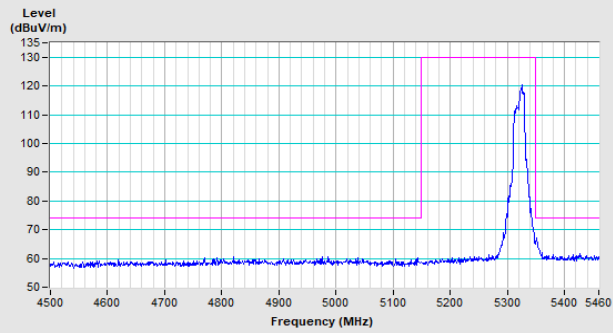


Vertical (Peak)

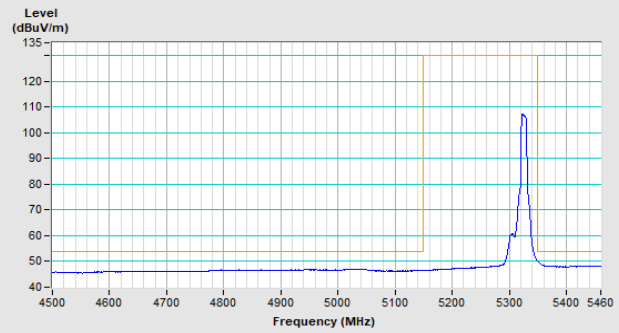


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) 106-tone RU Channel 100

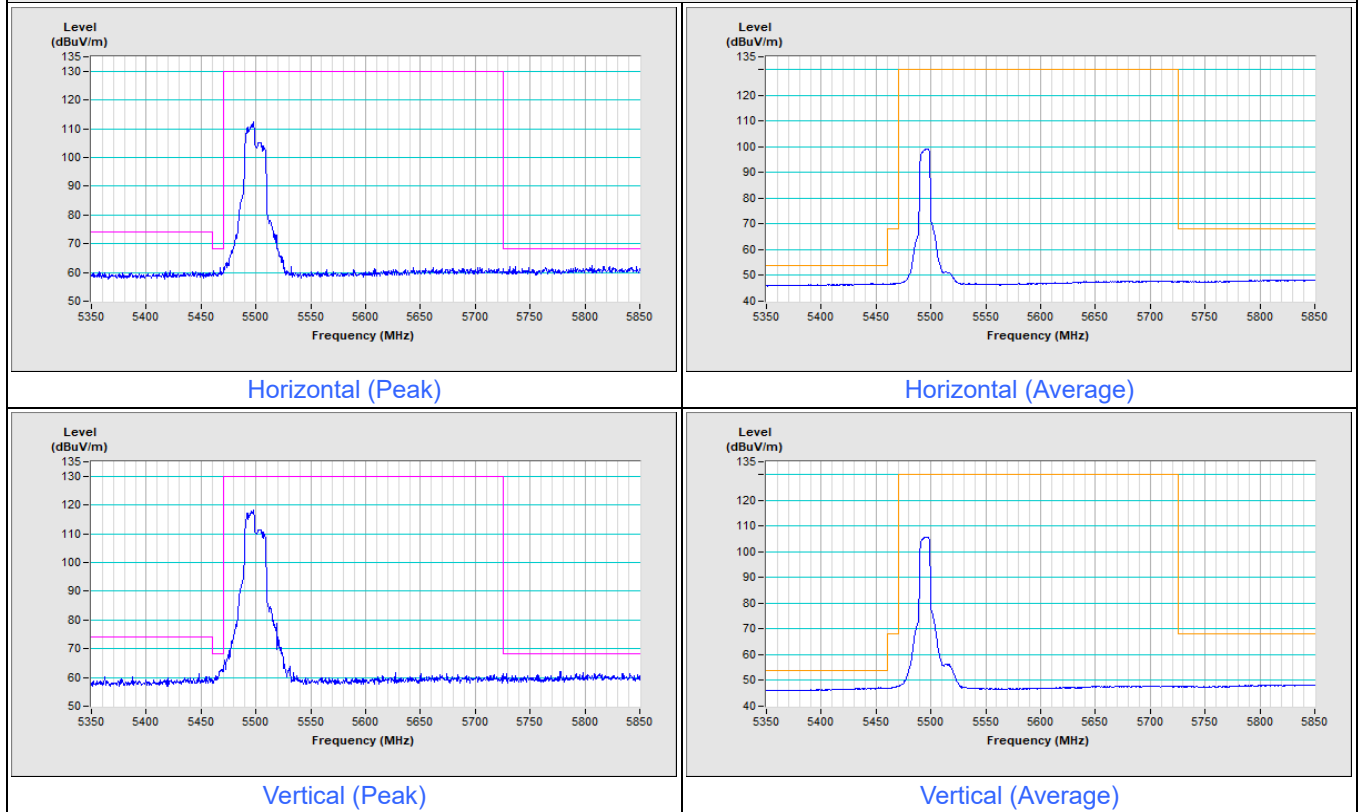


802.11be (EHT20) 106-tone RU Channel 140

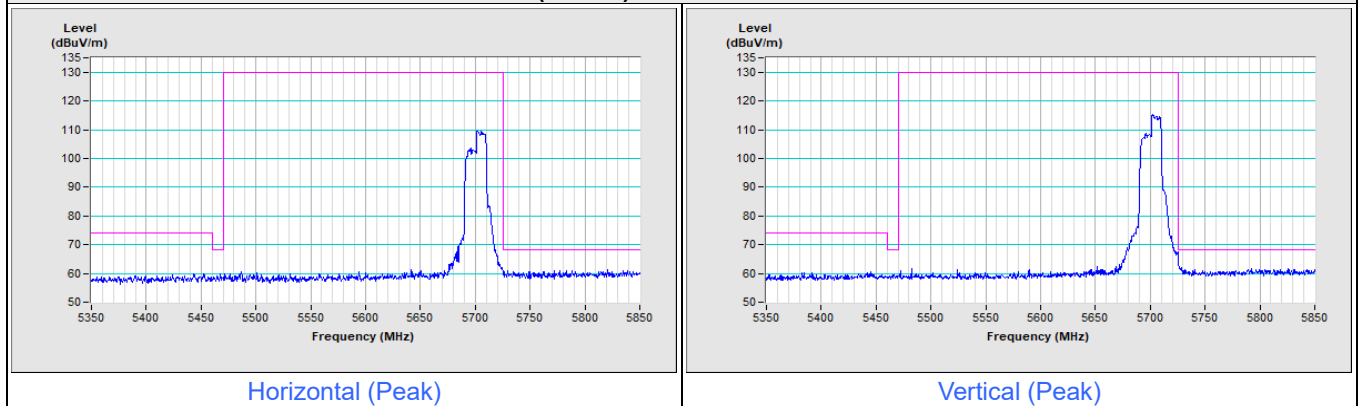


Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT20) 106-tone RU Channel 144

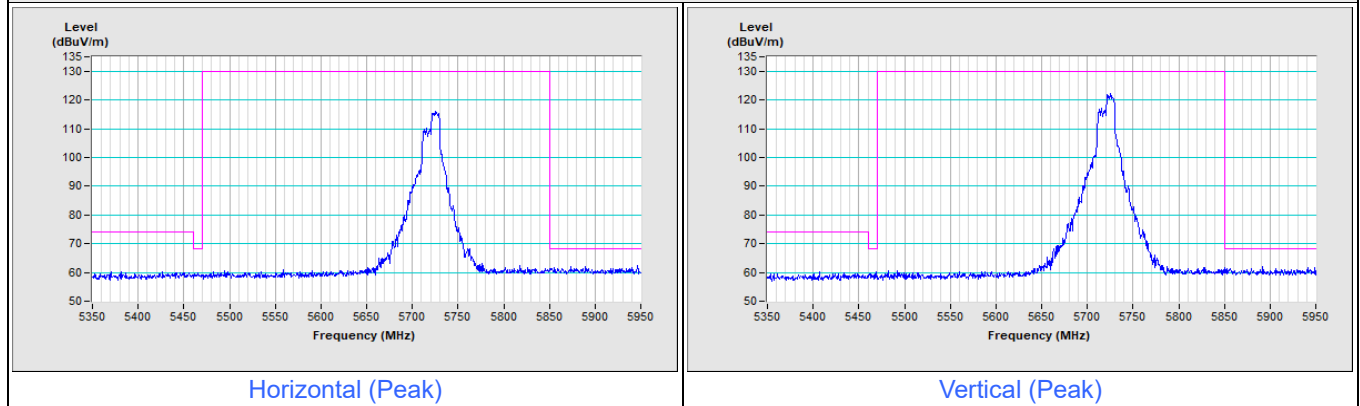


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------


802.11be (EHT20) 106-tone RU Channel 149

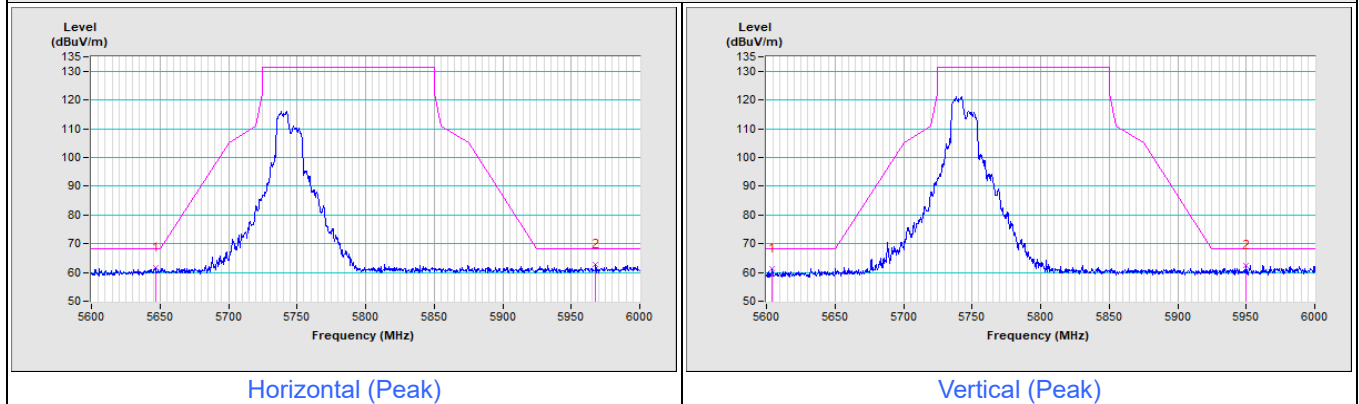

802.11be (EHT20) 106-tone RU Channel 157

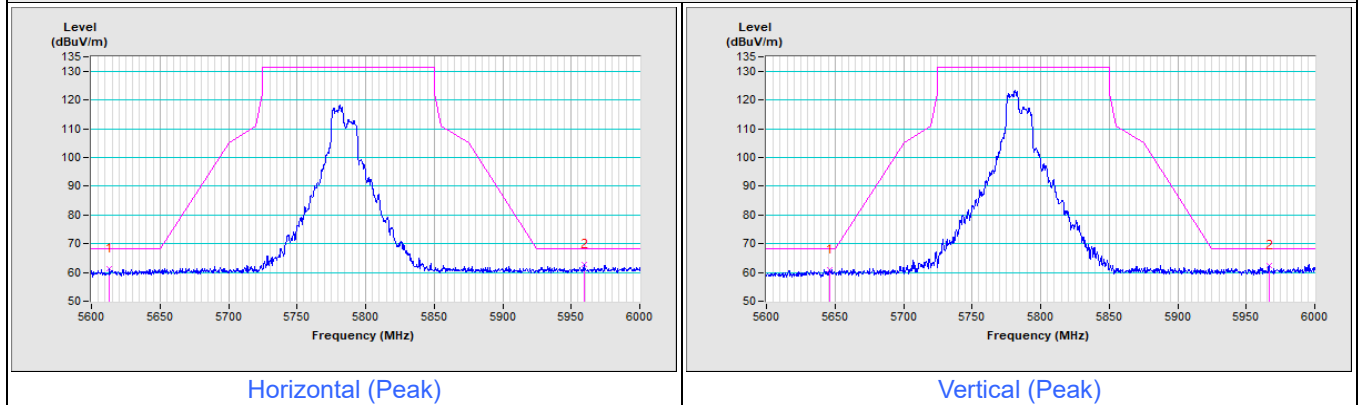


802.11be (EHT20) 106-tone RU Channel 165

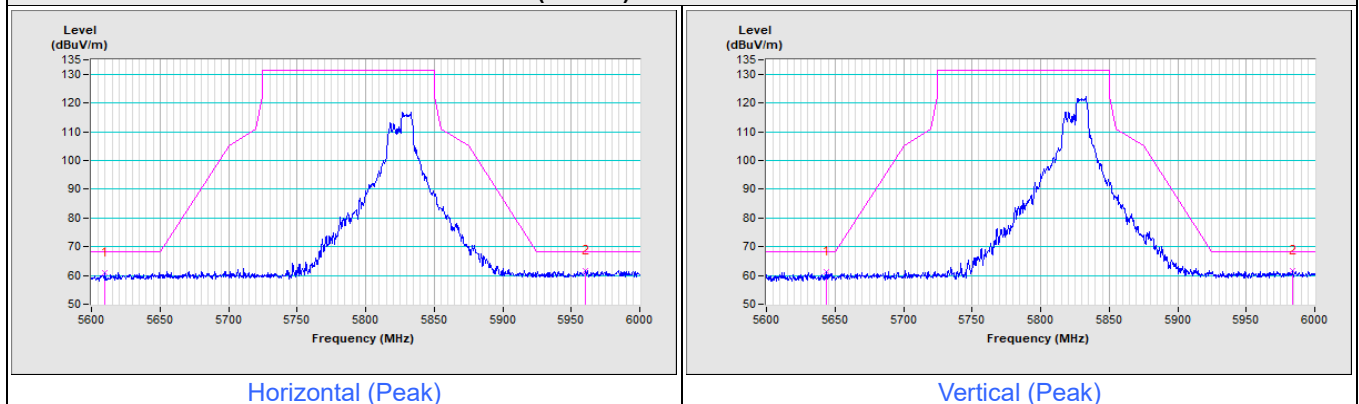


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 52+26-tone MRU Channel 48

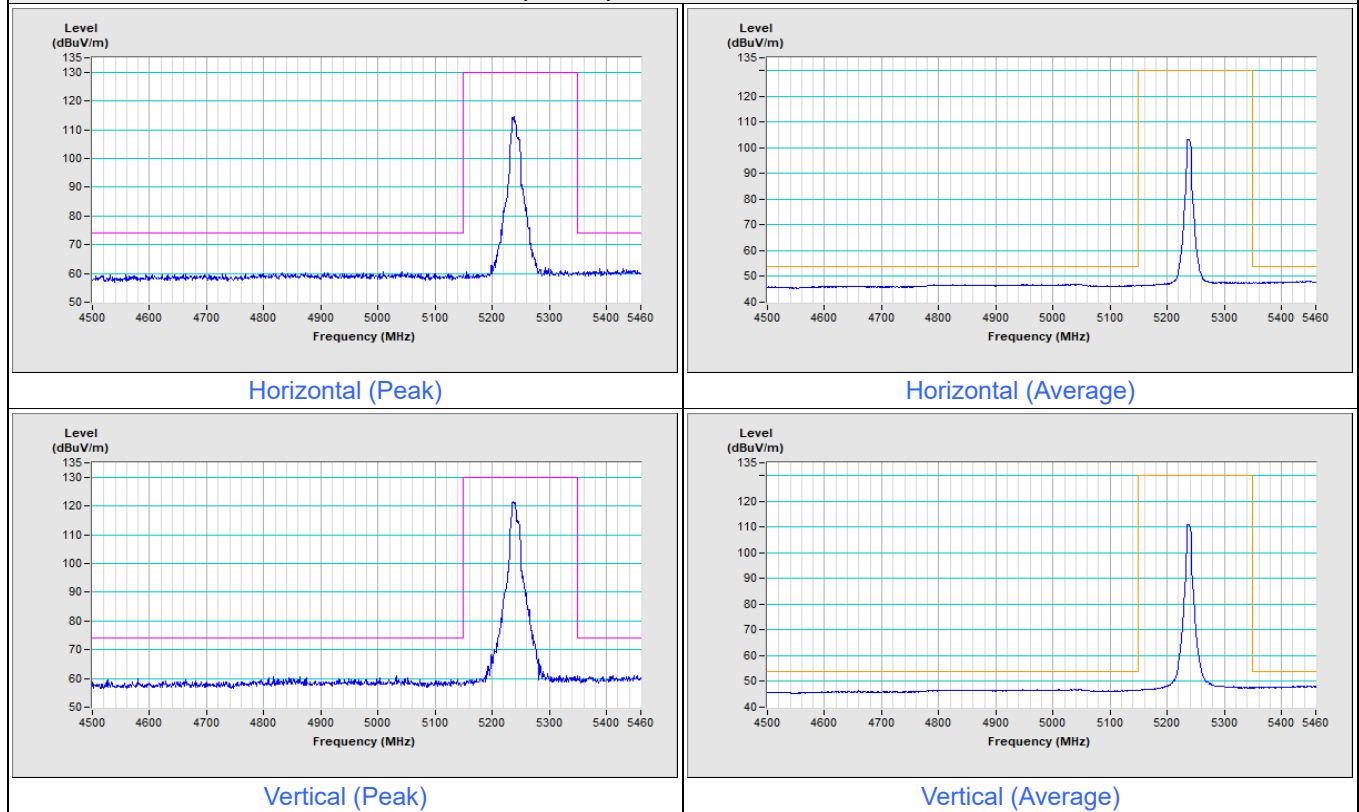


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT20) 52+26-tone MRU Channel 157

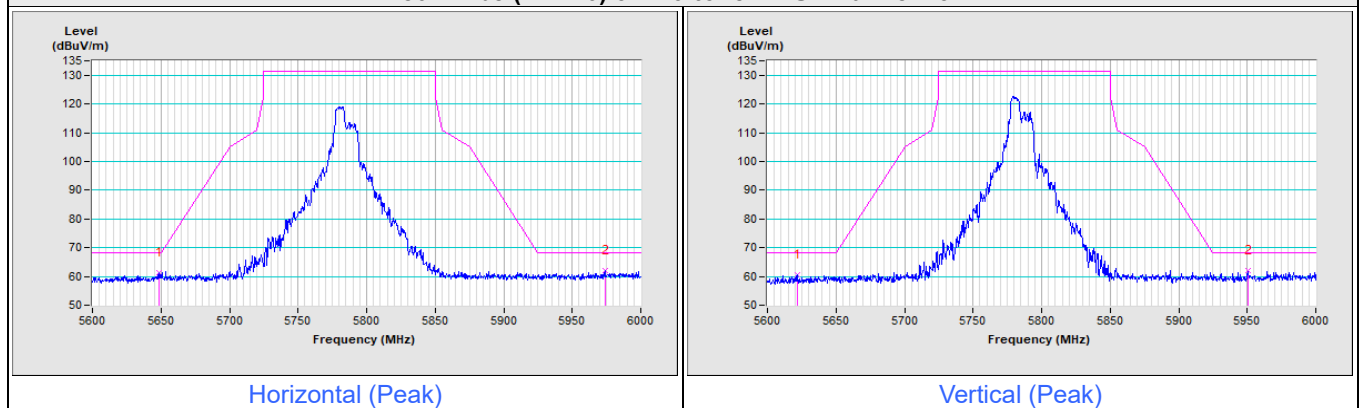


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT20) 106+26-tone MRU Channel 48

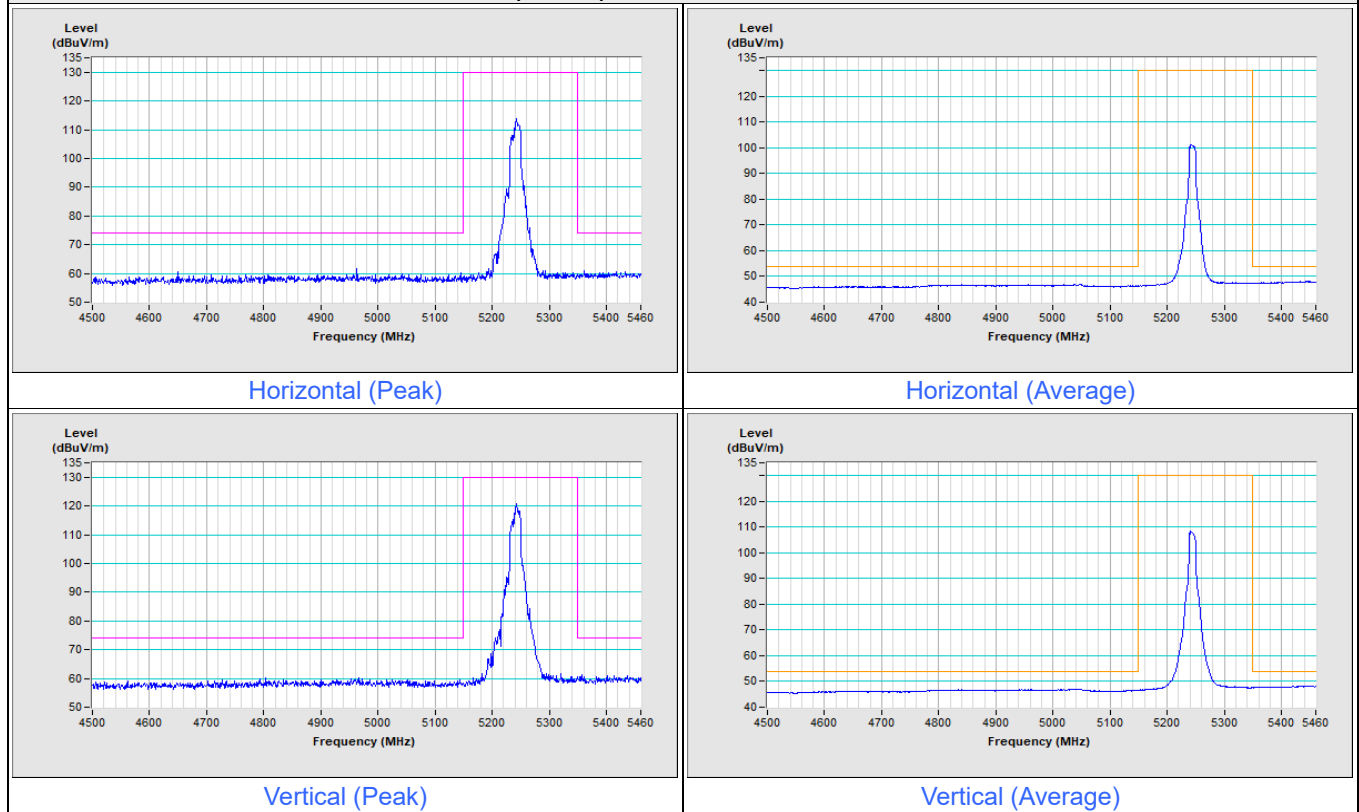


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT20) 106+26-tone MRU Channel 157

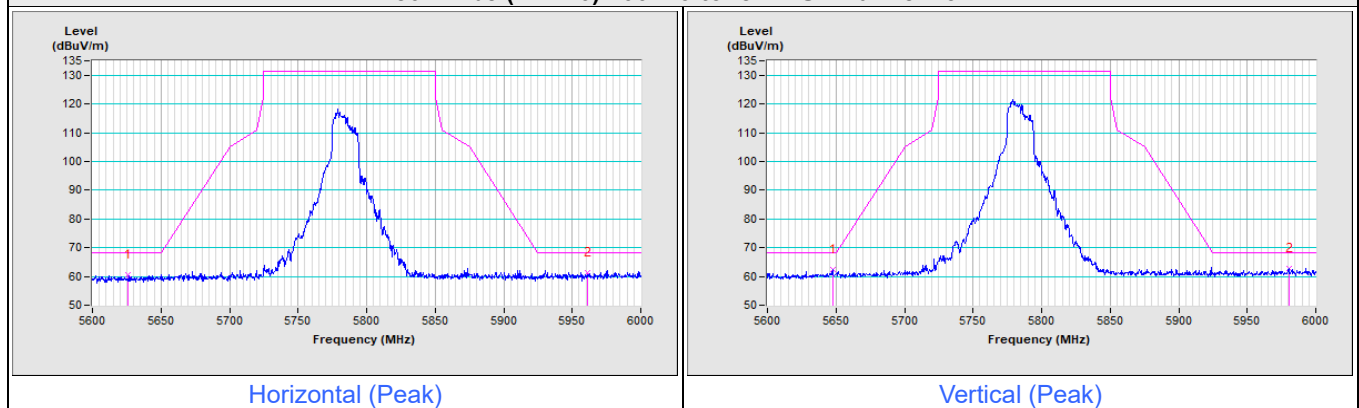


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11be (EHT80) 484+242-tone MRU Channel 42

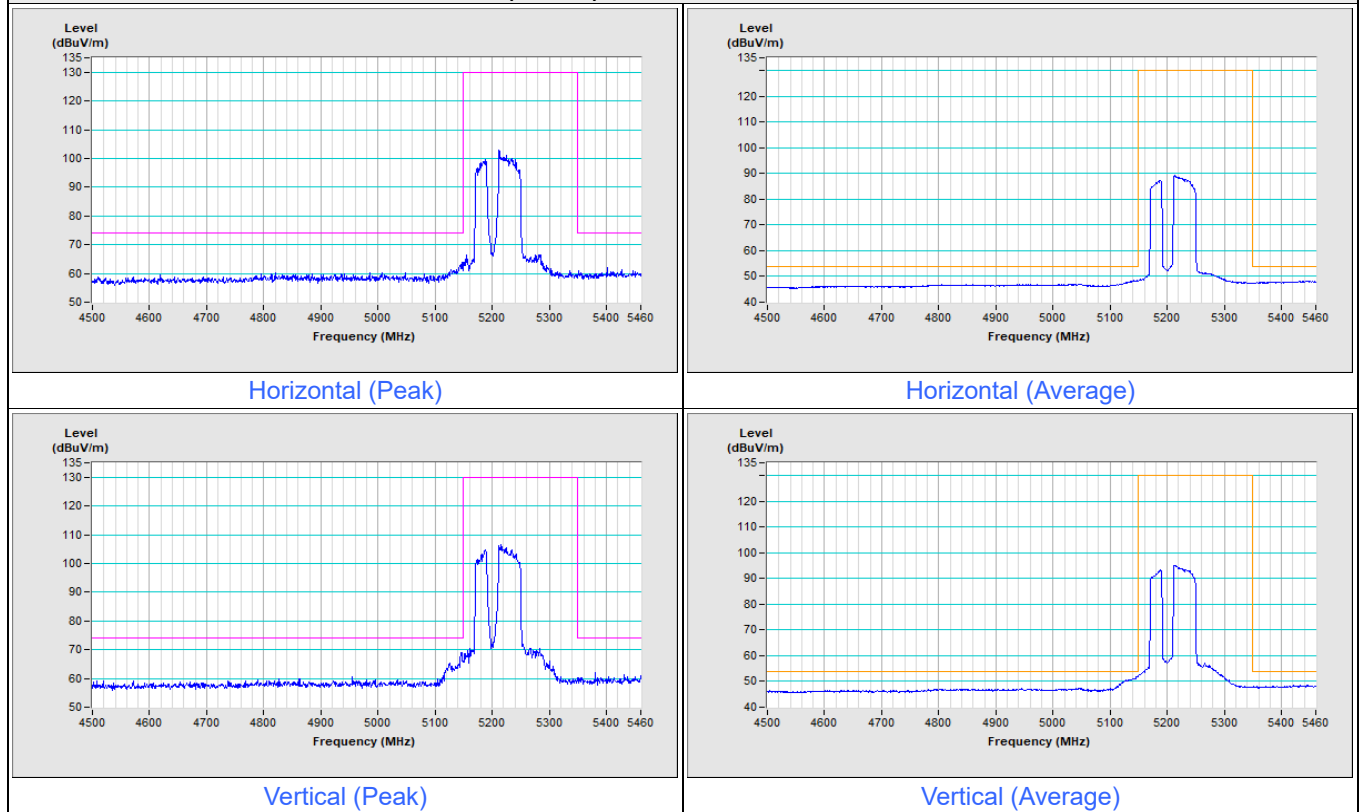


802.11be (EHT80) 484+242-tone MRU Channel 58

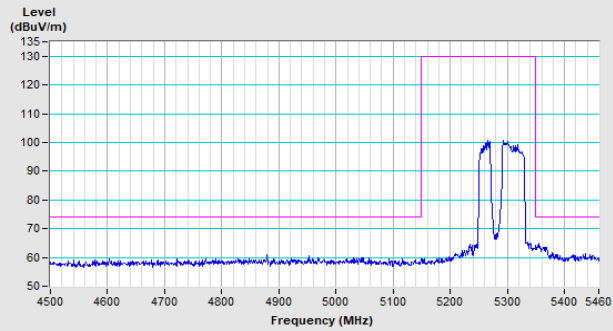


Horizontal (Peak)

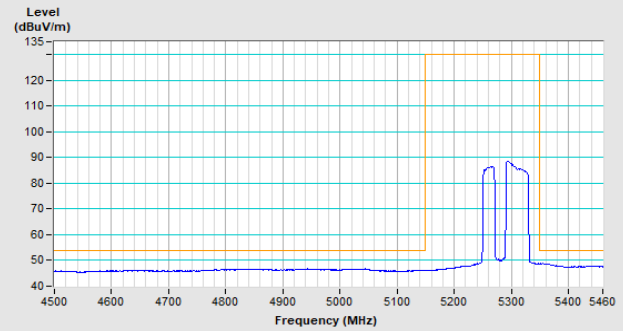

Horizontal (Average)

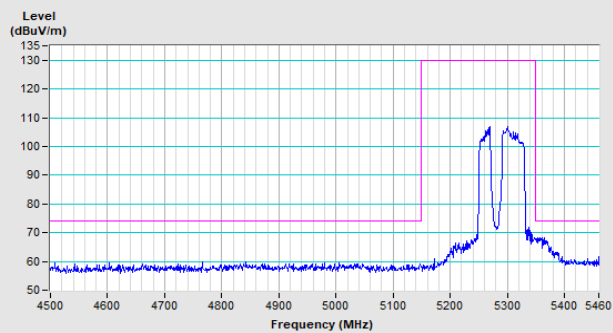


Vertical (Peak)

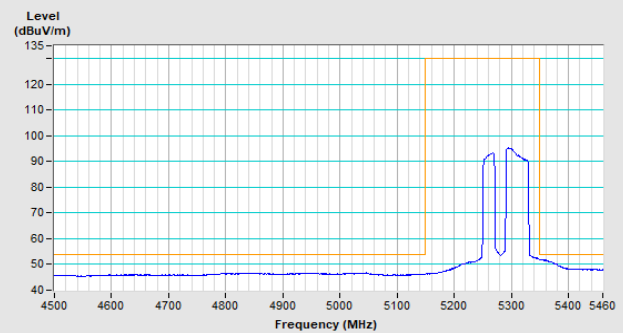


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

802.11be (EHT80) 484+242-tone MRU Channel 138

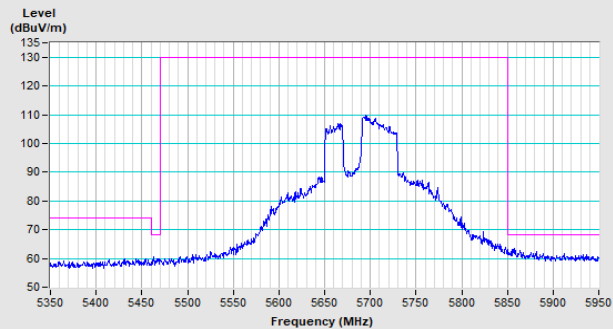


Horizontal (Peak)

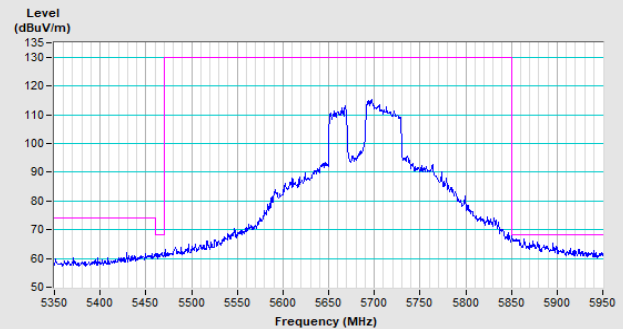

Vertical (Peak)


Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11be (EHT80) 484+242-tone MRU Channel 155

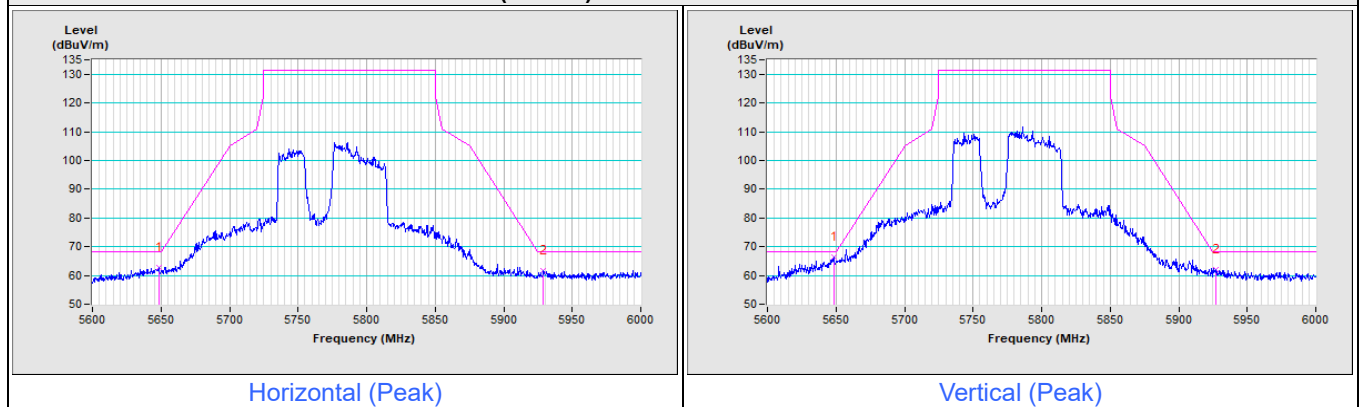


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 50

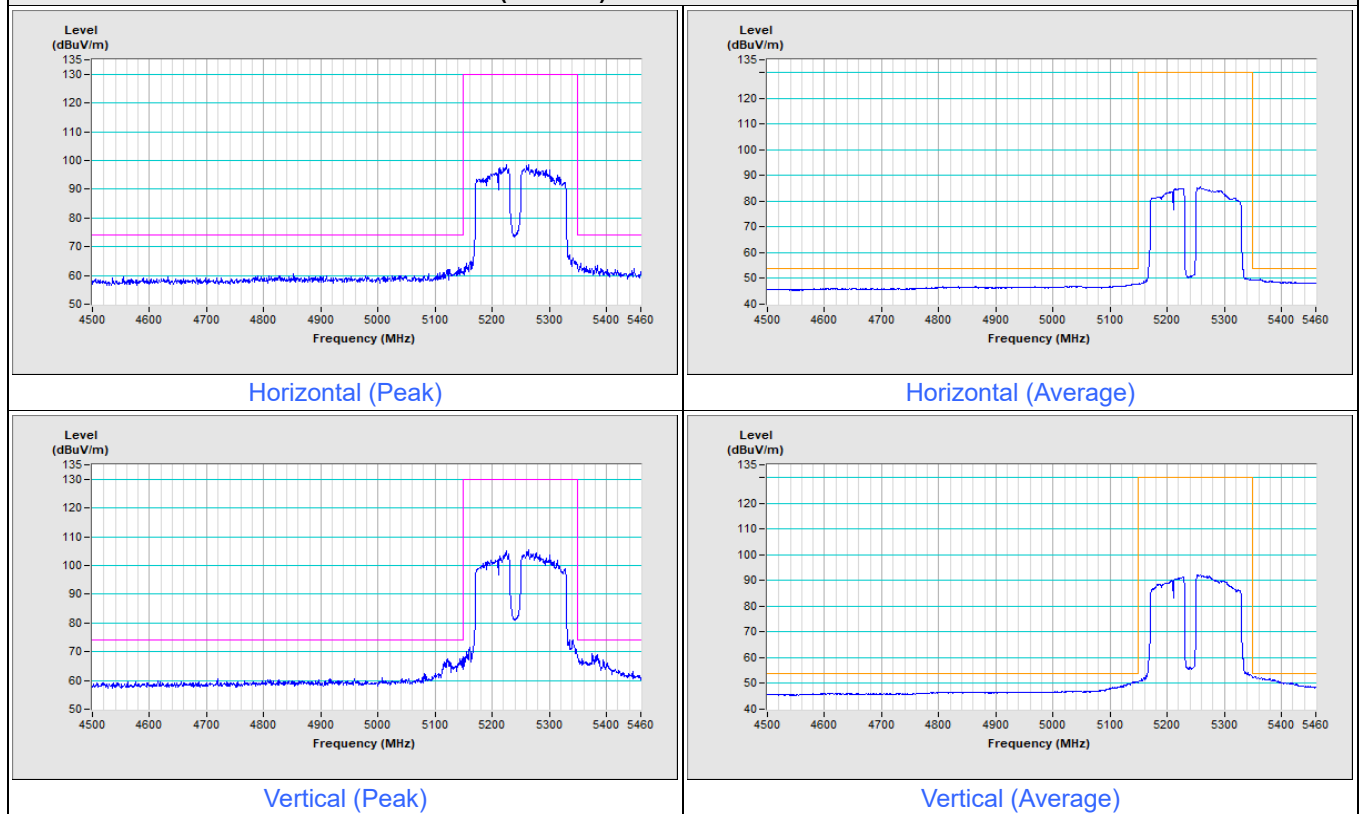


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484-tone MRU Channel 114

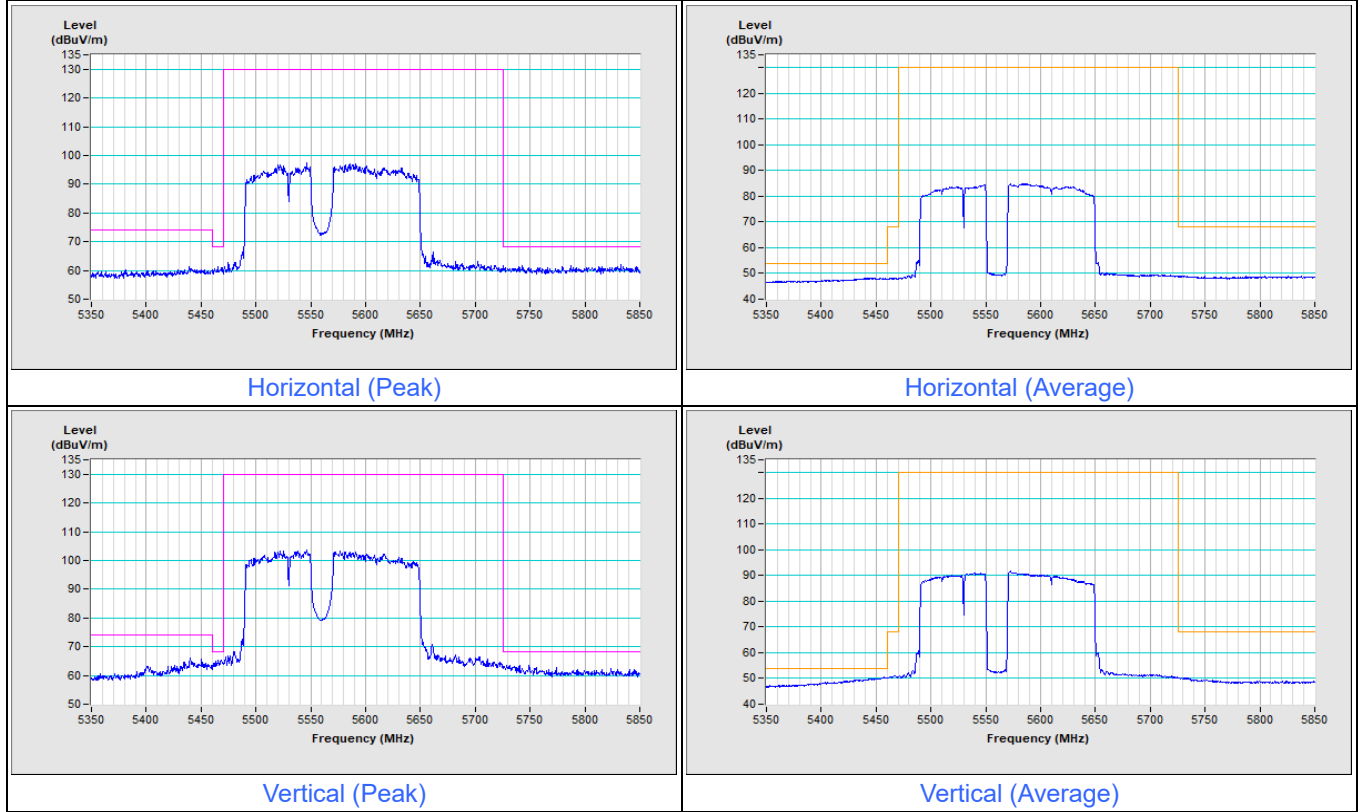


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 50

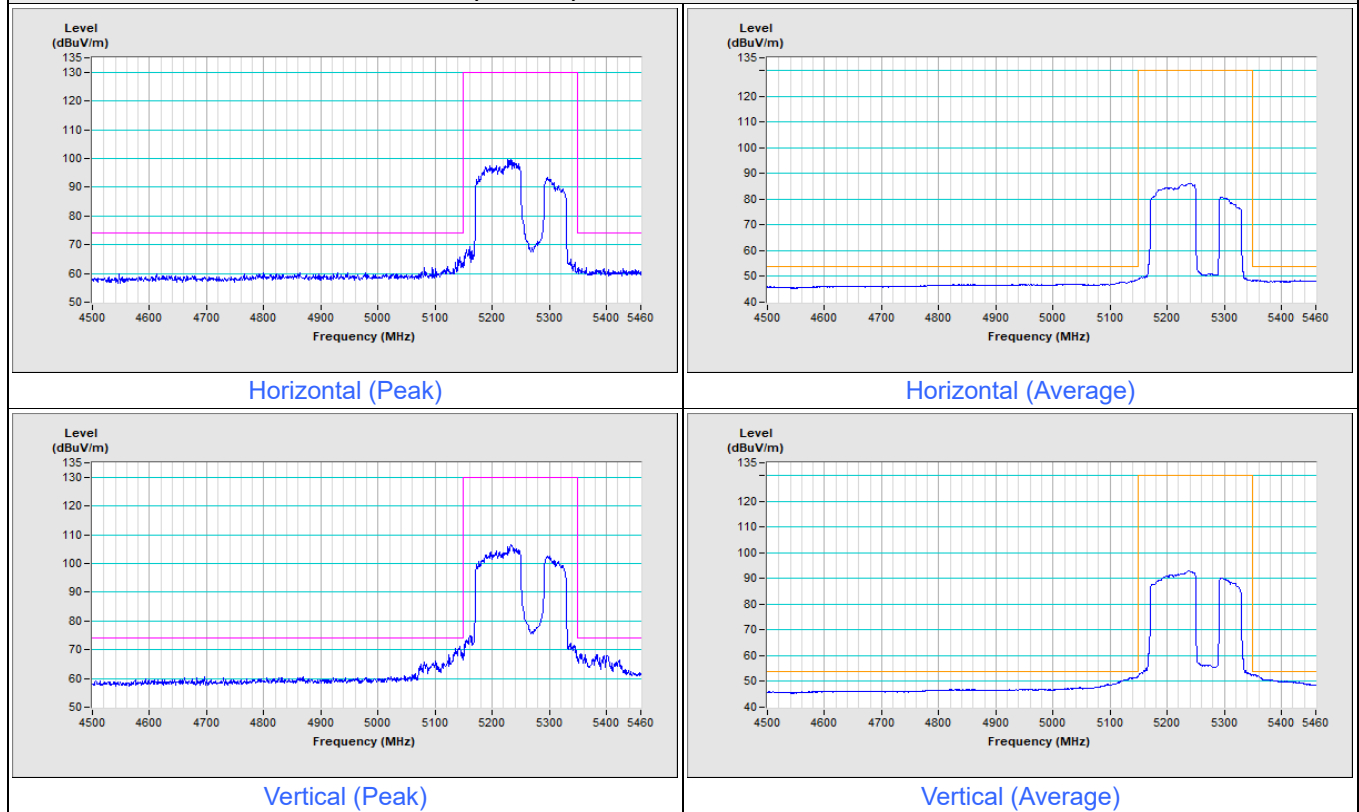


Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT160) 996+484+242-tone MRU Channel 114

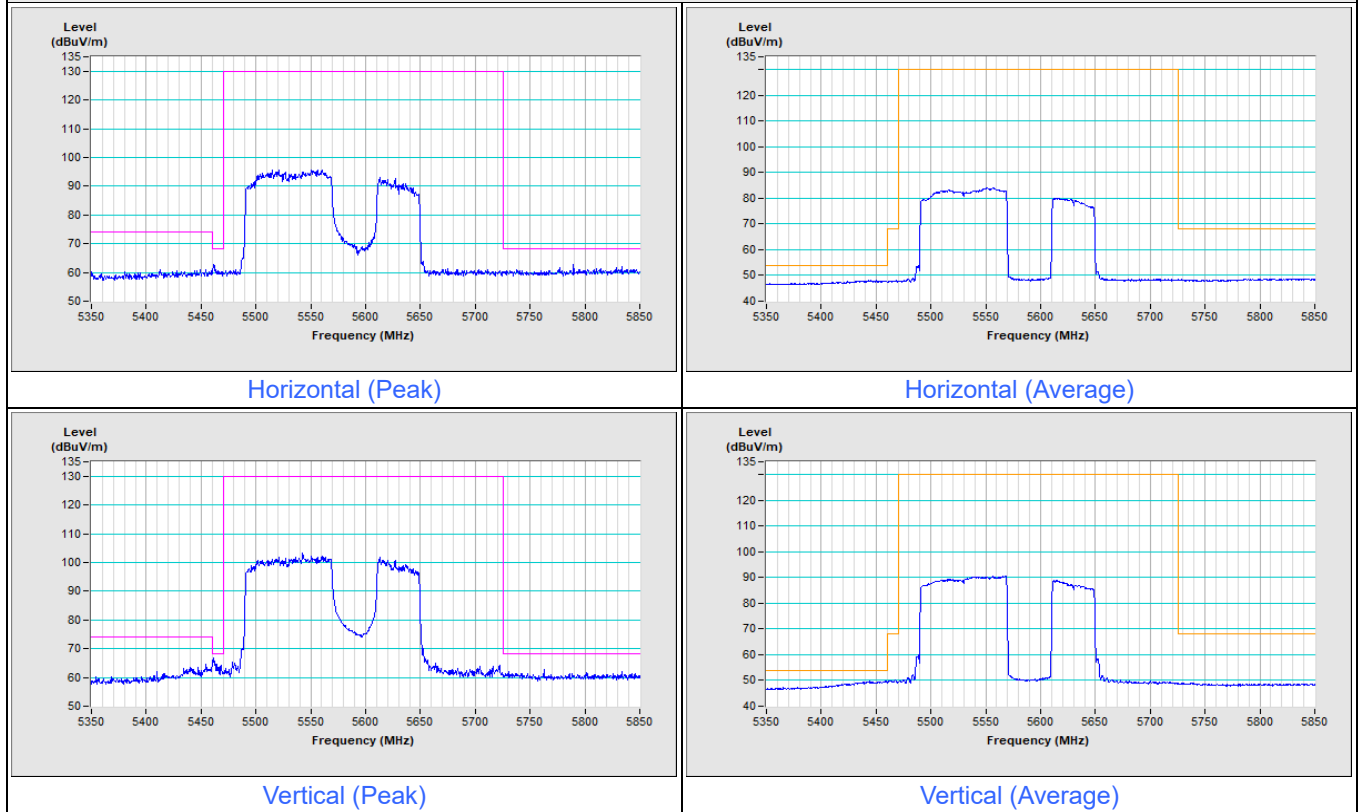


2TX (Test Mode B - Monopole Antenna)


Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	--------------------	-------------------------------	--

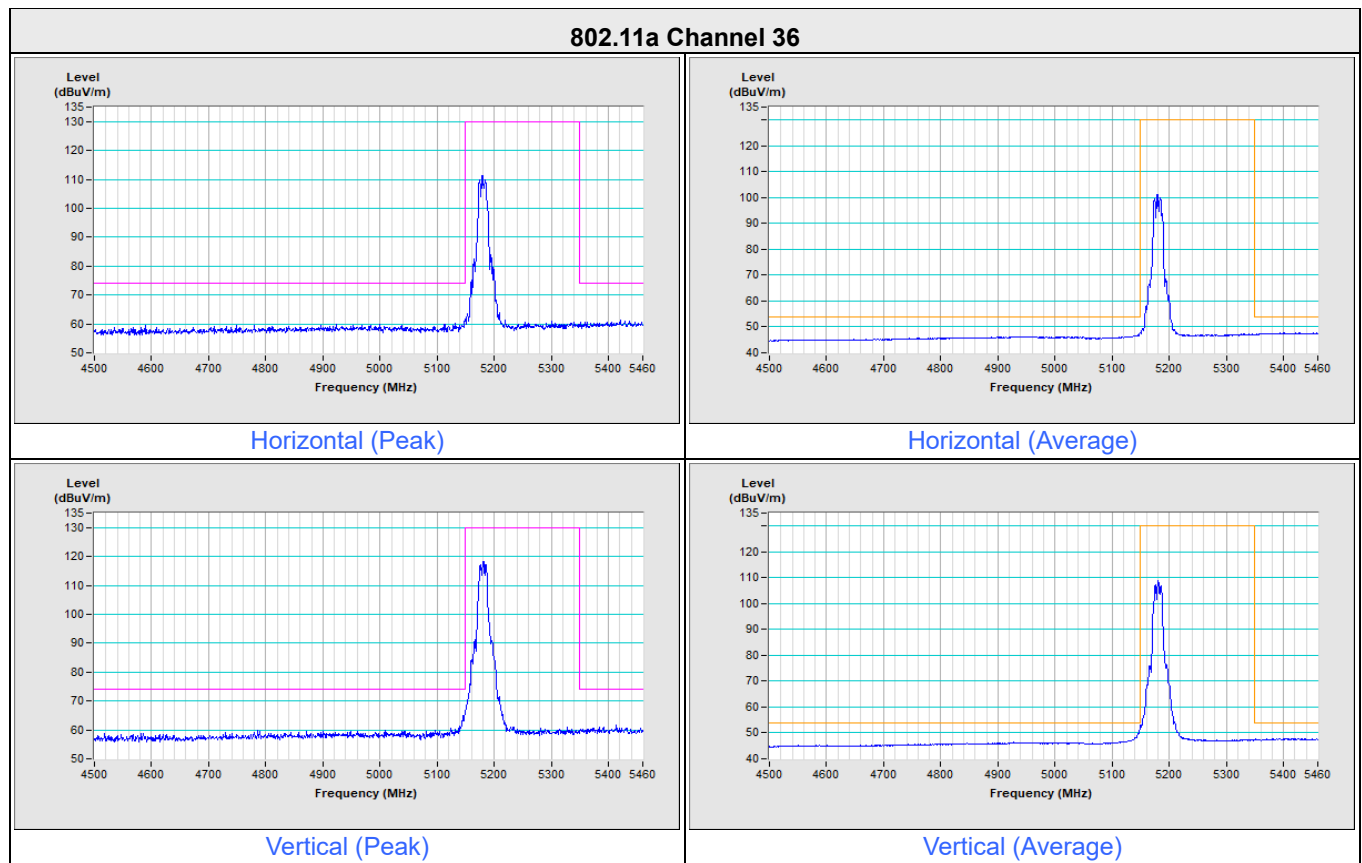


802.11a Channel 48

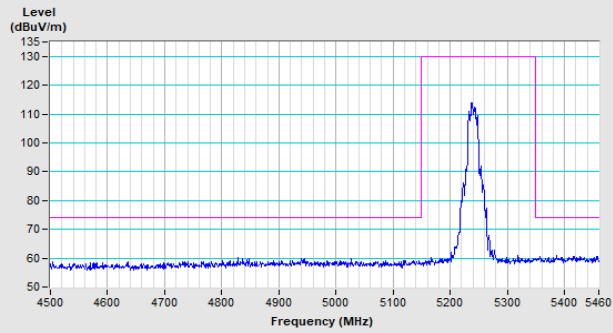


Horizontal (Peak)

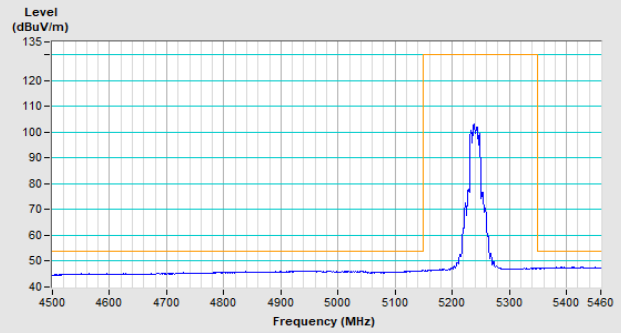

Horizontal (Average)

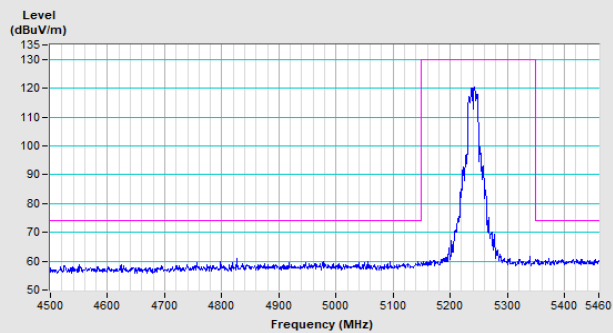


Vertical (Peak)

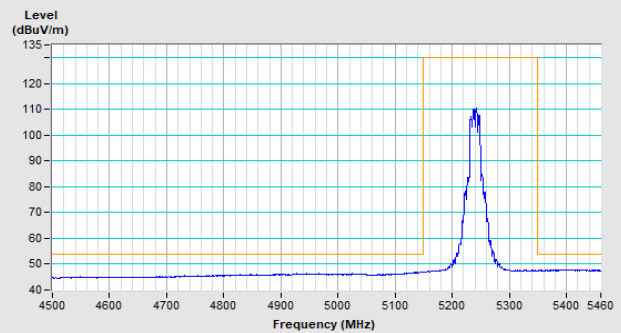


Vertical (Average)


802.11a Channel 52

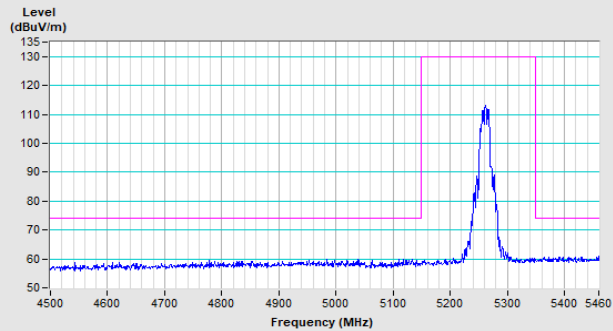


Horizontal (Peak)

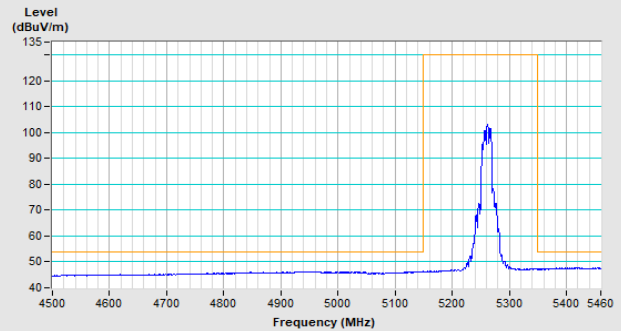

Horizontal (Average)

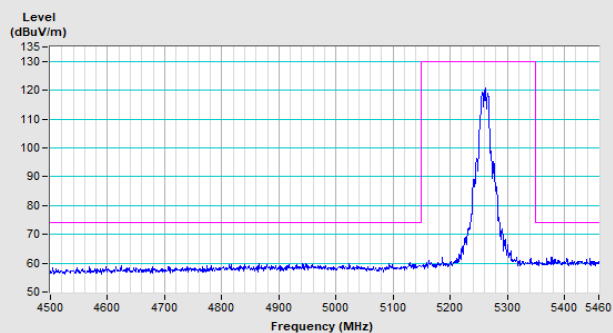


Vertical (Peak)

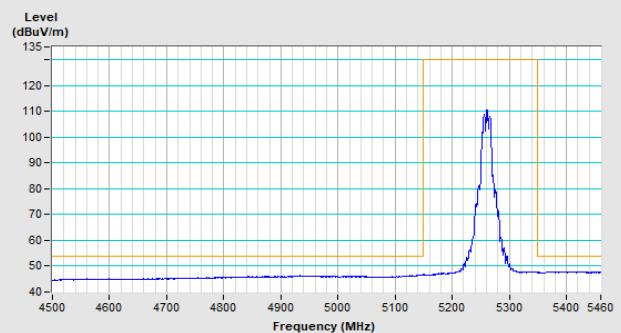


Vertical (Average)


802.11a Channel 64

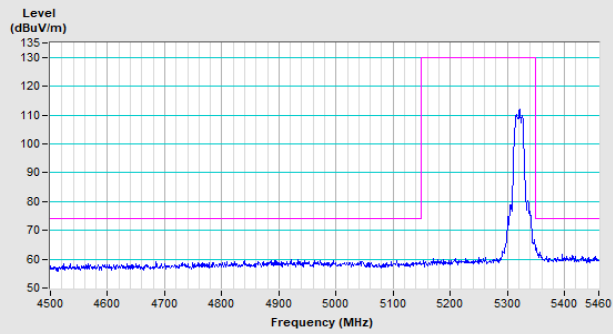


Horizontal (Peak)

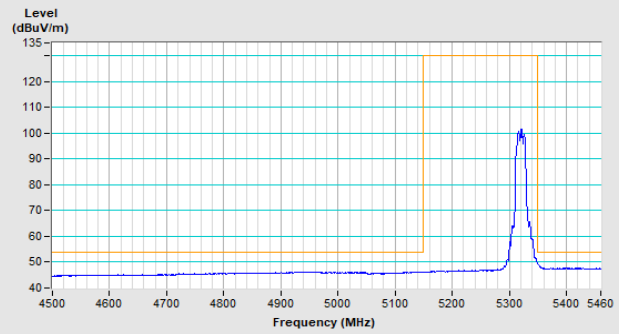

Horizontal (Average)

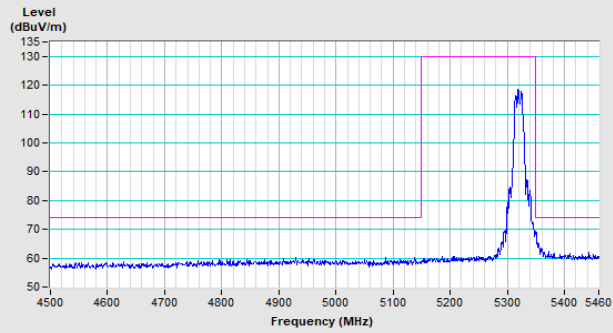


Vertical (Peak)

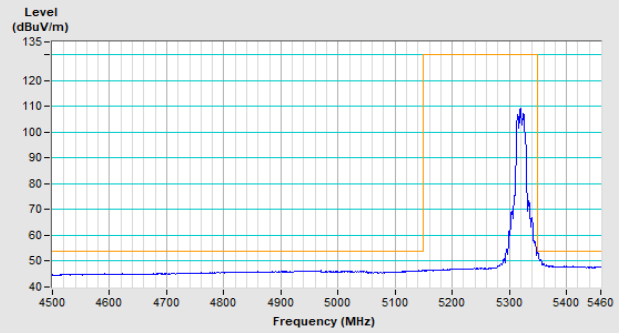


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11a Channel 100

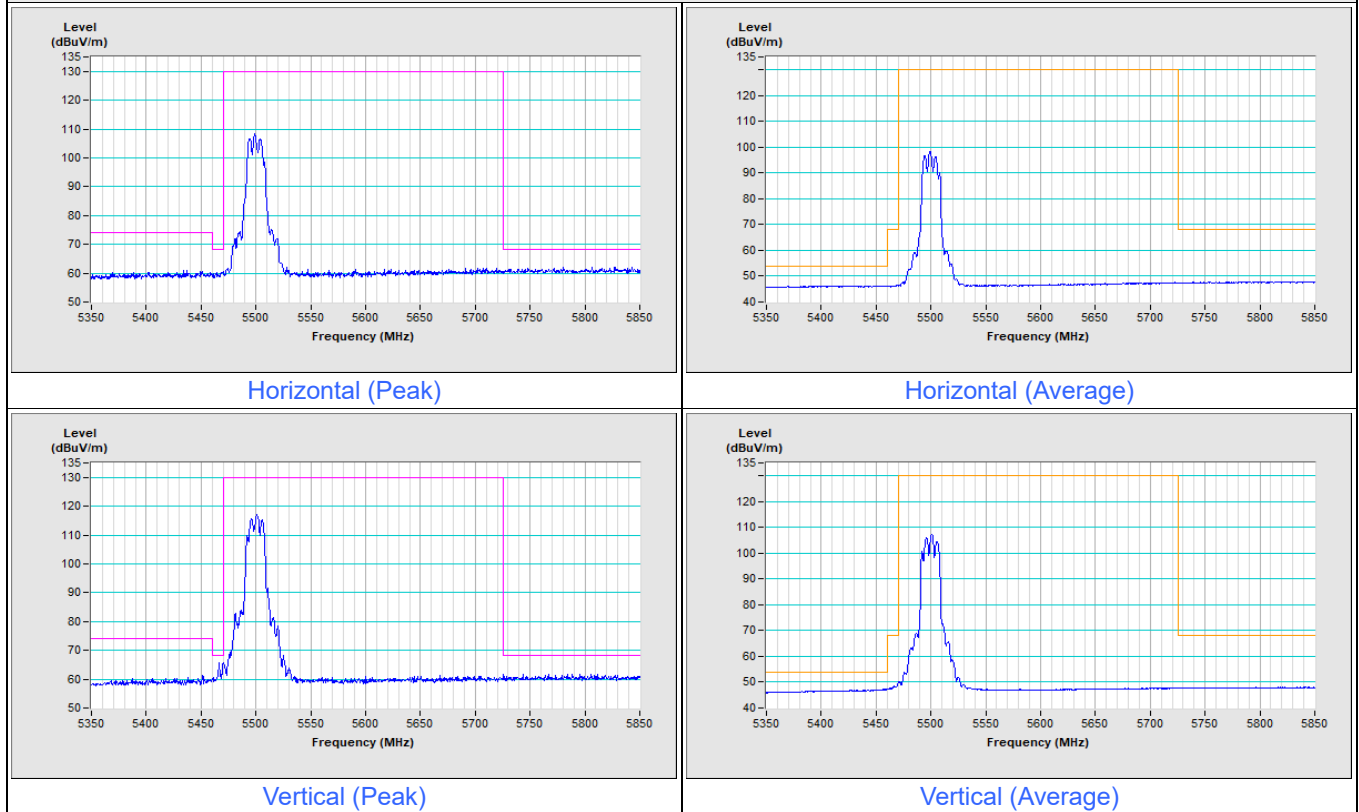

802.11a Channel 140

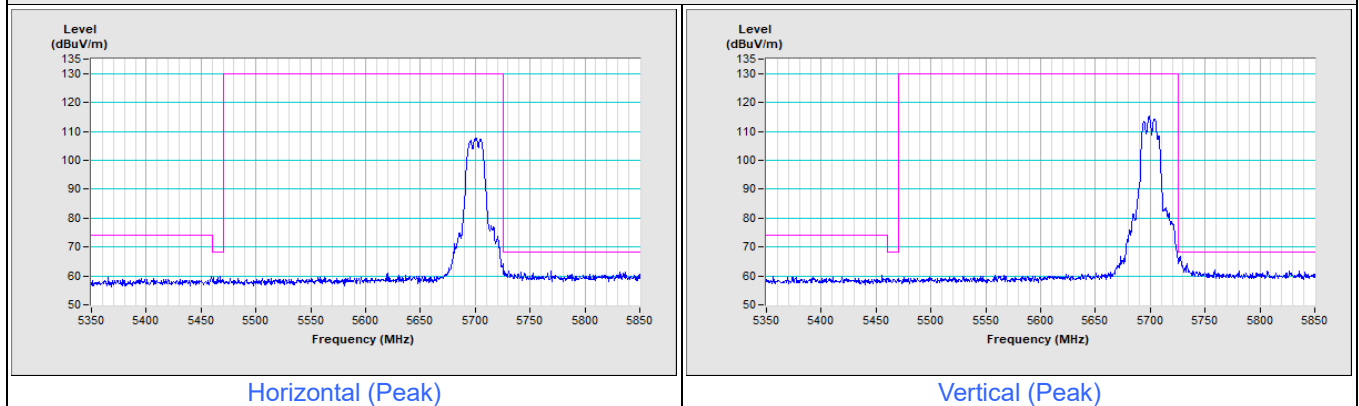

Frequency Range	5.35 GHz ~ 5.95 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	---------------------	-------------------------------	----------------------------------

