


## Appendix C. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


|               |                         |                |                       |
|---------------|-------------------------|----------------|-----------------------|
| Temperature   | 26°C                    | Humidity       | 68%                   |
| Test Engineer | Lucas Huang / Andy Tsai | Configurations | 2.4G WLAN + Bluetooth |

### Horizontal

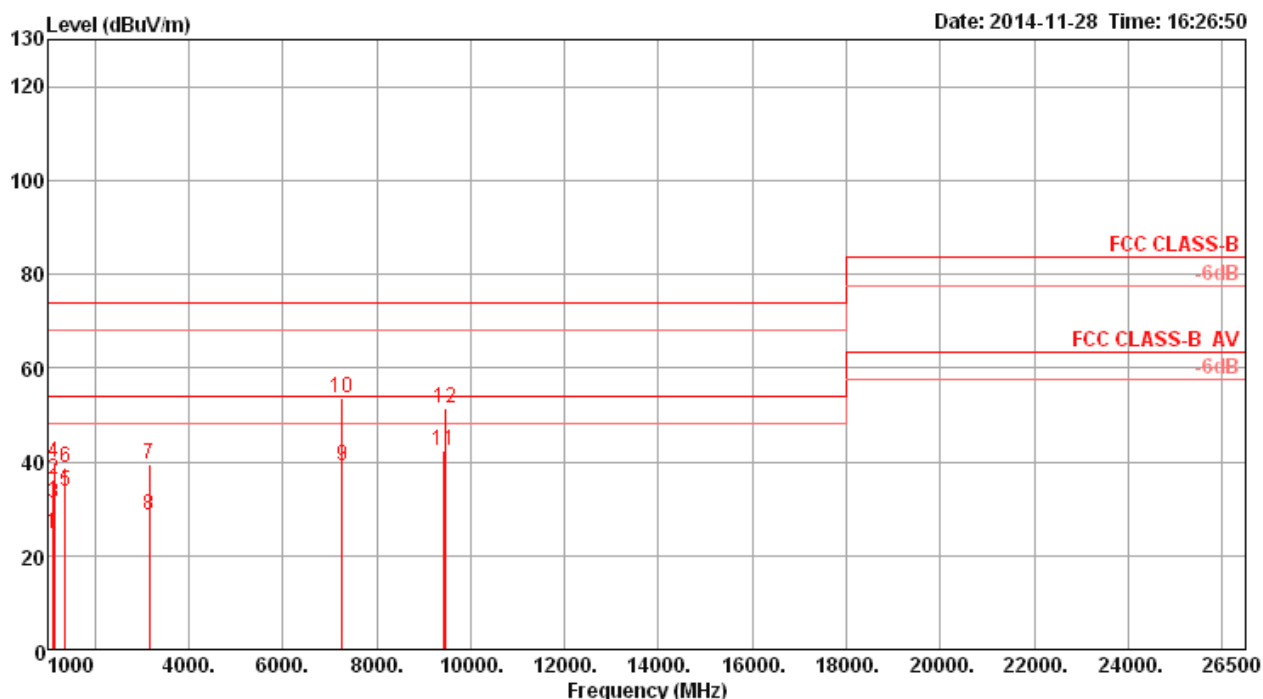

|    | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamplifier Factor | Remark  | A/Pos | T/Pos | Pol/Phase  |
|----|---------|--------|------------|------------|------------|------------|----------------|---------------------|---------|-------|-------|------------|
|    | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB                  |         | cm    | deg   |            |
| 1  | 1103.25 | 24.54  | 54.00      | -29.46     | 31.95      | 2.70       | 24.32          | 34.43               | Average | 117   | 142   | HORIZONTAL |
| 2  | 1109.13 | 36.17  | 74.00      | -37.83     | 43.53      | 2.70       | 24.37          | 34.43               | Peak    | 117   | 142   | HORIZONTAL |
| 3  | 1121.95 | 31.13  | 54.00      | -22.87     | 38.41      | 2.72       | 24.43          | 34.43               | Average | 132   | 175   | HORIZONTAL |
| 4  | 1126.86 | 39.70  | 74.00      | -34.30     | 47.01      | 2.72       | 24.43          | 34.46               | Peak    | 132   | 175   | HORIZONTAL |
| 5  | 1370.67 | 33.56  | 54.00      | -20.44     | 40.11      | 3.02       | 25.17          | 34.74               | Average | 162   | 128   | HORIZONTAL |
| 6  | 1377.12 | 38.58  | 74.00      | -35.42     | 45.13      | 3.02       | 25.17          | 34.74               | Peak    | 162   | 128   | HORIZONTAL |
| 7  | 3152.41 | 39.30  | 74.00      | -34.70     | 39.48      | 4.81       | 30.21          | 35.20               | Peak    | 202   | 239   | HORIZONTAL |
| 8  | 3155.12 | 28.62  | 54.00      | -25.38     | 28.80      | 4.81       | 30.21          | 35.20               | Average | 202   | 239   | HORIZONTAL |
| 9  | 7261.54 | 39.23  | 54.00      | -14.77     | 31.11      | 7.10       | 36.43          | 35.41               | Average | 185   | 260   | HORIZONTAL |
| 10 | 7265.13 | 53.65  | 74.00      | -20.35     | 45.52      | 7.11       | 36.43          | 35.41               | Peak    | 185   | 260   | HORIZONTAL |
| 11 | 9420.02 | 42.50  | 54.00      | -11.50     | 31.25      | 8.52       | 38.41          | 35.68               | Average | 159   | 55    | HORIZONTAL |
| 12 | 9460.13 | 51.43  | 74.00      | -22.57     | 40.11      | 8.54       | 38.47          | 35.69               | Peak    | 159   | 55    | HORIZONTAL |


# Vertical

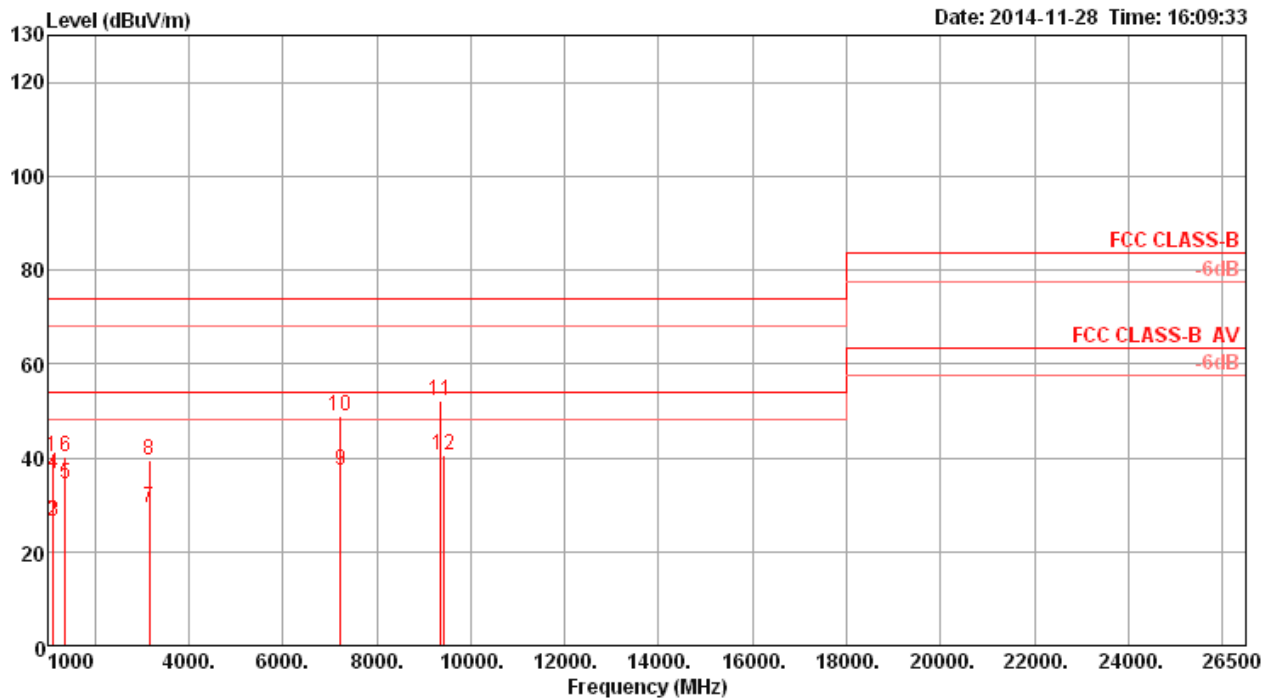

|    | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamplifier Factor | Remark  | A/Pos | T/Pos | Pol/Phase |
|----|---------|--------|------------|------------|------------|------------|----------------|---------------------|---------|-------|-------|-----------|
|    | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB                  |         | cm    | deg   |           |
| 1  | 1103.42 | 40.19  | 74.00      | -33.81     | 47.60      | 2.70       | 24.32          | 34.43               | Peak    | 192   | 185   | VERTICAL  |
| 2  | 1107.48 | 26.52  | 54.00      | -27.48     | 33.88      | 2.70       | 24.37          | 34.43               | Average | 192   | 185   | VERTICAL  |
| 3  | 1121.88 | 26.47  | 54.00      | -27.53     | 33.75      | 2.72       | 24.43          | 34.43               | Average | 126   | 332   | VERTICAL  |
| 4  | 1122.43 | 36.56  | 74.00      | -37.44     | 43.84      | 2.72       | 24.43          | 34.43               | Peak    | 126   | 332   | VERTICAL  |
| 5  | 1374.16 | 34.27  | 54.00      | -19.73     | 40.82      | 3.02       | 25.17          | 34.74               | Average | 101   | 125   | VERTICAL  |
| 6  | 1377.21 | 40.30  | 74.00      | -33.70     | 46.85      | 3.02       | 25.17          | 34.74               | Peak    | 101   | 125   | VERTICAL  |
| 7  | 3157.15 | 29.24  | 54.00      | -24.76     | 29.42      | 4.81       | 30.21          | 35.20               | Average | 221   | 52    | VERTICAL  |
| 8  | 3160.42 | 39.30  | 74.00      | -34.70     | 39.48      | 4.81       | 30.21          | 35.20               | Peak    | 221   | 52    | VERTICAL  |
| 9  | 7235.45 | 37.19  | 54.00      | -16.81     | 29.13      | 7.09       | 36.37          | 35.40               | Average | 160   | 263   | VERTICAL  |
| 10 | 7239.11 | 48.71  | 74.00      | -25.29     | 40.65      | 7.09       | 36.37          | 35.40               | Peak    | 160   | 263   | VERTICAL  |
| 11 | 9369.10 | 52.04  | 74.00      | -21.96     | 40.86      | 8.49       | 38.36          | 35.67               | Peak    | 108   | 331   | VERTICAL  |
| 12 | 9421.13 | 40.40  | 54.00      | -13.60     | 29.13      | 8.52       | 38.43          | 35.68               | Average | 108   | 331   | VERTICAL  |


|               |                         |                |                     |
|---------------|-------------------------|----------------|---------------------|
| Temperature   | 26°C                    | Humidity       | 68%                 |
| Test Engineer | Lucas Huang / Andy Tsai | Configurations | 5G WLAN + Bluetooth |

# Horizontal

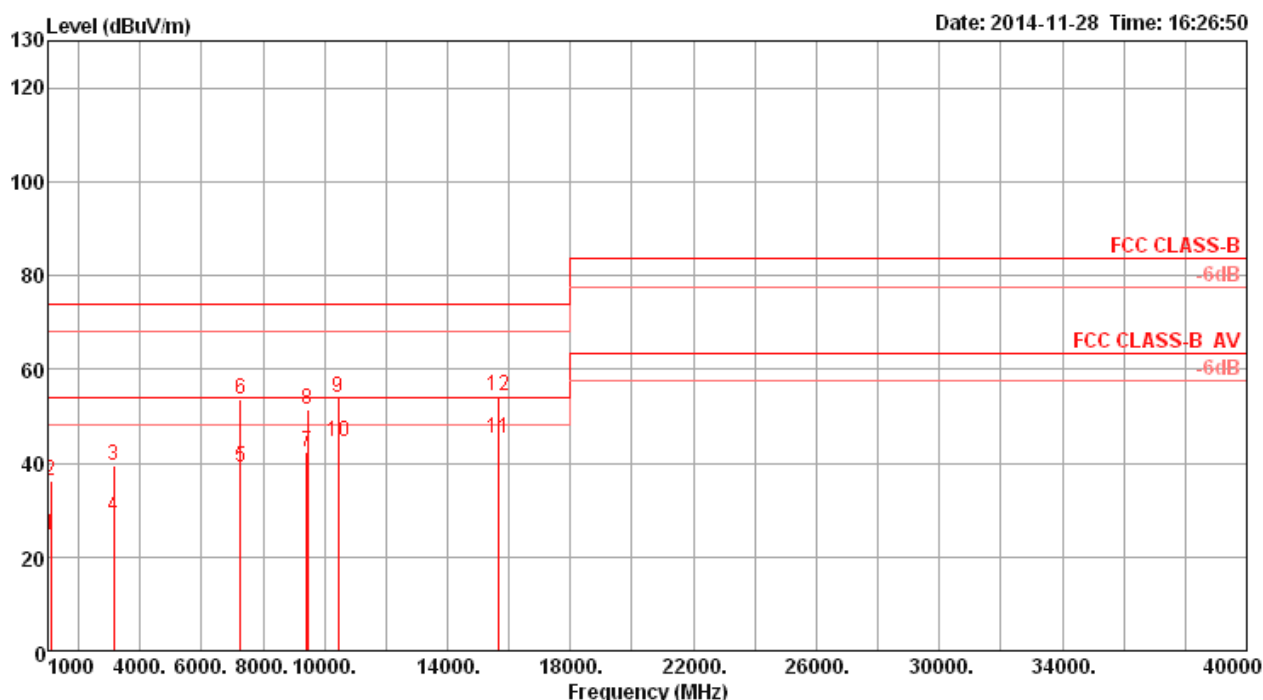

|    | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase  |
|----|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|------------|
|    | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |            |
| 1  | 1103.25  | 24.54  | 54.00  | -29.46 | 31.95 | 2.70  | 24.32   | 34.43  | Average | 117   | 142   | HORIZONTAL |
| 2  | 1109.13  | 36.17  | 74.00  | -37.83 | 43.53 | 2.70  | 24.37   | 34.43  | Peak    | 117   | 142   | HORIZONTAL |
| 3  | 3152.41  | 39.30  | 74.00  | -34.70 | 39.48 | 4.81  | 30.21   | 35.20  | Peak    | 202   | 239   | HORIZONTAL |
| 4  | 3155.12  | 28.62  | 54.00  | -25.38 | 28.80 | 4.81  | 30.21   | 35.20  | Average | 202   | 239   | HORIZONTAL |
| 5  | 7261.54  | 39.23  | 54.00  | -14.77 | 31.11 | 7.10  | 36.43   | 35.41  | Average | 185   | 260   | HORIZONTAL |
| 6  | 7265.13  | 53.65  | 74.00  | -20.35 | 45.52 | 7.11  | 36.43   | 35.41  | Peak    | 185   | 260   | HORIZONTAL |
| 7  | 9420.02  | 42.50  | 54.00  | -11.50 | 31.25 | 8.52  | 38.41   | 35.68  | Average | 159   | 55    | HORIZONTAL |
| 8  | 9460.13  | 51.43  | 74.00  | -22.57 | 40.11 | 8.54  | 38.47   | 35.69  | Peak    | 159   | 55    | HORIZONTAL |
| 9  | 10434.13 | 54.12  | 74.00  | -19.88 | 40.95 | 8.55  | 39.88   | 35.26  | Peak    | 201   | 49    | HORIZONTAL |
| 10 | 10437.44 | 44.63  | 54.00  | -9.37  | 31.46 | 8.55  | 39.88   | 35.26  | Average | 201   | 49    | HORIZONTAL |
| 11 | 15633.12 | 45.32  | 54.00  | -8.68  | 32.12 | 10.78 | 37.99   | 35.57  | Average | 172   | 63    | HORIZONTAL |
| 12 | 15636.91 | 54.43  | 74.00  | -19.57 | 41.23 | 10.78 | 37.99   | 35.57  | Peak    | 172   | 63    | HORIZONTAL |

# Vertical

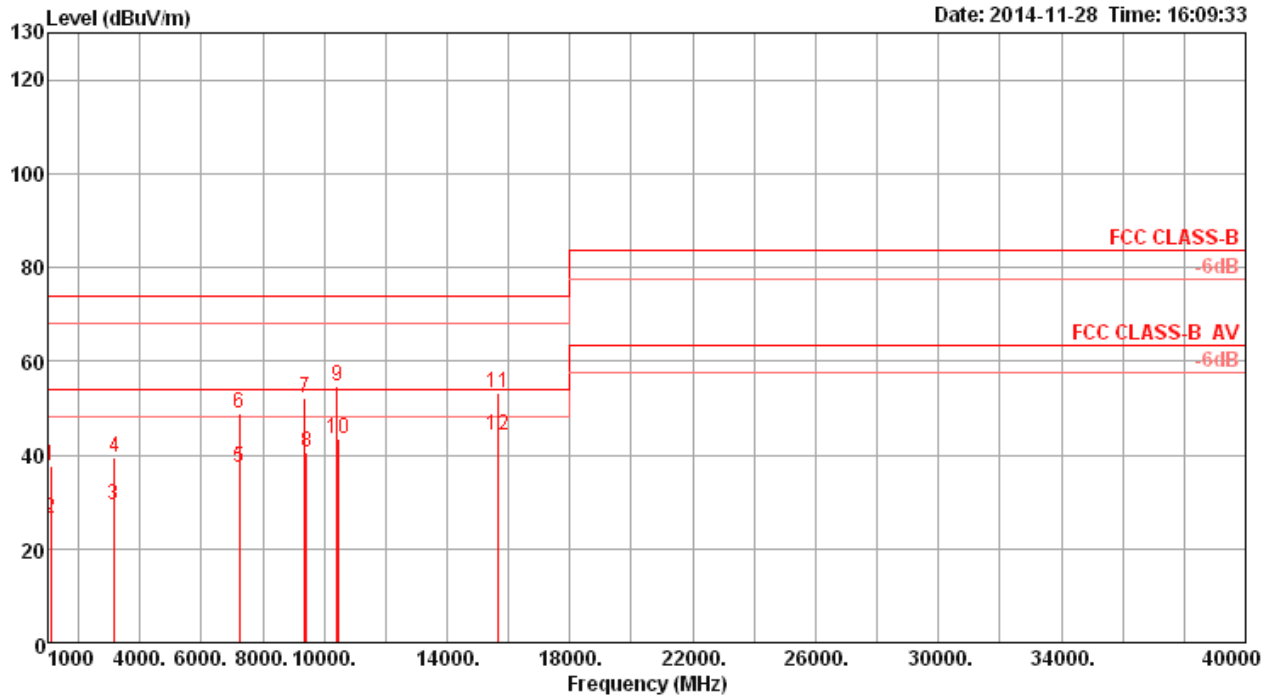

|    | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | Remark  | A/Pos | T/Pos | Pol/Phase |
|----|----------|--------|--------|--------|-------|-------|---------|--------|---------|-------|-------|-----------|
|    | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     |         | cm    | deg   |           |
| 1  | 1101.15  | 37.75  | 74.00  | -36.25 | 45.16 | 2.70  | 24.32   | 34.43  | Peak    | 177   | 93    | VERTICAL  |
| 2  | 1105.15  | 26.34  | 54.00  | -27.66 | 33.70 | 2.70  | 24.37   | 34.43  | Average | 177   | 93    | VERTICAL  |
| 3  | 3157.15  | 29.24  | 54.00  | -24.76 | 29.42 | 4.81  | 30.21   | 35.20  | Average | 221   | 52    | VERTICAL  |
| 4  | 3160.42  | 39.30  | 74.00  | -34.70 | 39.48 | 4.81  | 30.21   | 35.20  | Peak    | 221   | 52    | VERTICAL  |
| 5  | 7235.45  | 37.19  | 54.00  | -16.81 | 29.13 | 7.09  | 36.37   | 35.40  | Average | 160   | 263   | VERTICAL  |
| 6  | 7239.11  | 48.71  | 74.00  | -25.29 | 40.65 | 7.09  | 36.37   | 35.40  | Peak    | 160   | 263   | VERTICAL  |
| 7  | 9369.10  | 52.04  | 74.00  | -21.96 | 40.86 | 8.49  | 38.36   | 35.67  | Peak    | 108   | 331   | VERTICAL  |
| 8  | 9421.13  | 40.40  | 54.00  | -13.60 | 29.13 | 8.52  | 38.43   | 35.68  | Average | 108   | 331   | VERTICAL  |
| 9  | 10424.99 | 54.68  | 74.00  | -19.32 | 41.55 | 8.55  | 39.88   | 35.26  | Peak    | 172   | 97    | VERTICAL  |
| 10 | 10437.15 | 43.29  | 54.00  | -10.71 | 30.12 | 8.55  | 39.88   | 35.26  | Average | 172   | 97    | VERTICAL  |
| 11 | 15635.16 | 53.33  | 74.00  | -20.67 | 40.13 | 10.78 | 37.99   | 35.57  | Peak    | 201   | 122   | VERTICAL  |
| 12 | 15637.52 | 44.23  | 54.00  | -9.77  | 31.03 | 10.78 | 37.99   | 35.57  | Average | 201   | 122   | VERTICAL  |