

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-262-RWD-074
Reception No. : 2510003507
Applicant : Remote Solution Co., Ltd.
Address : 92, Chogokri, Nammyun, Kimchon City, Kyungbuk, 740-871, South Korea
Manufacturer : Remote Solution Co., Ltd.
Address : 326-14, Apo-daero, Nam-myeon, Gimcheon-si, Gyeongsangbuk-do, 39662, South Korea
Type of Equipment : Josh Edge Remote
FCC ID. : TX4-RE47
Model Name : RE47
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 22 pages (including this page)
Date of Incoming : November 03, 2025
Date of issue : February 27, 2026

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This test report is not associated with the accreditation granted by the Korean Laboratory Accreditation Scheme (KOLAS).



Tested by
 Si-eon Lee / Senior Project Engineer
 ONETECH Corp.



Reviewed by
 Tae-Ho, Kim / Chief Engineer
 ONETECH Corp.



Approved by
 Jae-Ho, Lee / Director
 ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	10
5.5 ANTENNA REQUIREMENT	10
6. MEASUREMENT UNCERTAINTY	10
7. PRELIMINARY TEST	11
7.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	11
7.2 GENERAL RADIATED EMISSIONS TESTS	11
8. MIMIMUM 6 DB BANDWIDTH	12
8.1 OPERATING ENVIRONMENT	12
8.2 TEST SET-UP	12
8.3 TEST DATE	12
8.4 TEST DATA.....	12
9. MAXIMUM CONDUCTED(PEAK) OUTPUT POWER.....	13
9.1 OPERATING ENVIRONMENT	13
9.2 TEST SET-UP	13
9.3 TEST DATE	13
9.4 TEST DATA.....	13

10. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	14
10.1 OPERATING ENVIRONMENT	14
10.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	14
10.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	14
10.4 TEST DATE	14
10.5 TEST DATA FOR CONDUCTED EMISSION	14
10.6 TEST DATA FOR RADIATED EMISSION.....	15
10.6.1 Radiated Emission which fall in the Restricted Band.....	15
10.6.2 Spurious & Harmonic Radiated Emission.....	16
11. POWER SPECTRAL DENSITY	17
11.1 OPERATING ENVIRONMENT	17
11.2 TEST SET-UP	17
11.3 TEST DATE	17
11.4 TEST DATA.....	17
12. RADIATED EMISSION TEST	18
12.1 OPERATING ENVIRONMENT	18
12.2 TEST SET-UP	18
12.3 TEST DATE	19
12.4 TEST DATA FOR 30 MHZ ~ 1 000 MHZ	20
12.5 TEST DATA FOR BELOW 30 MHZ	21
12.6 TEST DATA FOR ABOVE 1 GHZ	21
13. LIST OF TEST EQUIPMENT	22

※ Please refer to the Annex section for All test plots

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-262-RWD-074	February 27, 2026	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Remote Solution Co., Ltd.

Address : 92, Chogokri, Nammyun, Kimchon City, Kyungbuk, 740-871, South Korea

Contact Person : jikwon / Pro

Telephone No. : +82-31-390-1592

FCC ID : TX4-RE47

Model Name : RE47

Brand Name : -

Serial Number : N/A

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Josh Edge Remote
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Remote Solution Co., Ltd., Model RE47 (referred to as the EUT in this report) is a Josh Edge Remote. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Josh Edge Remote
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK
RF OUTPUT POWER	7.40 dBm
ANTENNA TYPE	PCB Antenna
ANTENNA GAIN	2.32 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	24 MHz
RATED SUPPLY VOLTAGE	DC 3.80 V

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Remote Solution Co., Ltd.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
RE47	Remote Solution Co., Ltd.	Josh Edge Remote (EUT)	-
HP250 G9 6N224PC	HP	Notebook PC	EUT

5.3 Mode of operation during the test

-. Channel List (Bluetooth LE 2 Mbps)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		

-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE 2 Mbps	-	-	100	0.00

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Output Power	1.22
Conducted Spurious Emission < 26.5 GHz	1.40
Power Spectral Density	1.22
Line Conducted Disturbance (150 kHz ~ 30 MHz)	1.60
Radiated Disturbance (9 kHz ~ 30 MHz)	3.28
Radiated Disturbance (30 MHz ~ 1 GHz)	4.42
Radiated Disturbance (1 GHz ~ 18 GHz)	5.12
Radiated Disturbance (18 GHz ~ 26.5 GHz)	5.67

7. PRELIMINARY TEST

7.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC battery.	

7.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

8. MINIMUM 6 dB BANDWIDTH


8.1 Operating environment

Temperature : 22 °C

Relative humidity : 41 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

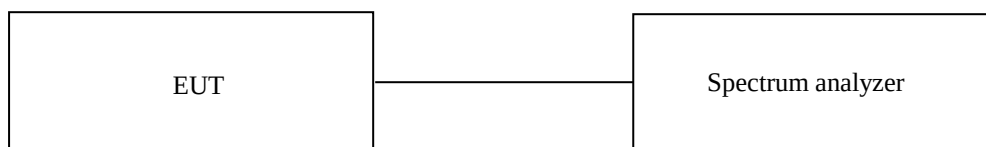

8.3 Test date

November 03, 2025 ~ November 25, 2025

8.4 Test data

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (kHz)	LIMIT (kHz)	Margin (kHz)
Low	2 402.00	1 398.53	500.00	898.53
Middle	2 440.00	1 298.94	500.00	798.94
High	2 480.00	1 418.75	500.00	918.75

Remark. Margin = Measured Value – Limit

9. MAXIMUM CONDUCTED(PEAK) OUTPUT POWER

9.1 Operating environment


Temperature : 22 °C

Relative humidity : 41 % R.H.

9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to 3 MHz, the video bandwidth is set to 3 times the resolution bandwidth.

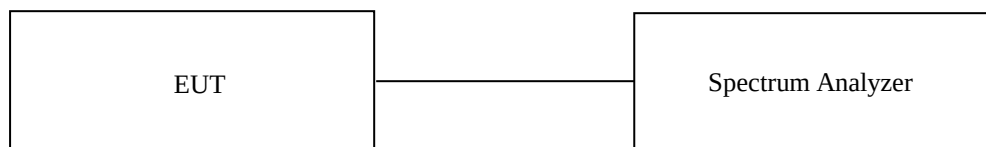

9.3 Test date

November 03, 2025 ~ November 25, 2025

9.4 Test data

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	7.40	30.00	22.60
MIDDLE	2 440.00	7.31	30.00	22.69
HIGH	2 480.00	6.96	30.00	23.04

Remark. Margin = Limit –Measured Value

10. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


10.1 Operating environment

Temperature : 22 °C

Relative humidity : 41 % R.H.

10.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz and video bandwidth is set to 300 kHz, and peak detection was used.

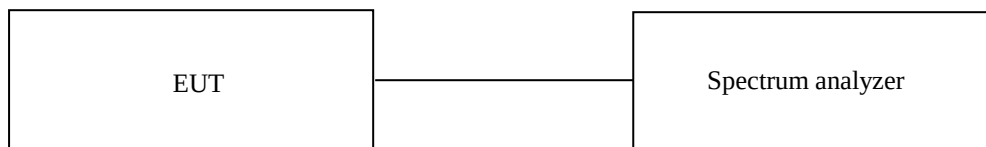

10.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

10.4 Test date

November 03, 2025 ~ November 25, 2025

10.5 Test data for conducted emission

Please refer to the Annex

10.6 Test data for radiated emission

10.6.1 Radiated Emission which fall in the Restricted Band

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Gain (dB)	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 340.56	54.56	Peak	H	27.74	4.58	42.77	-	-	44.11	74.00	29.89
2 336.42	43.07	Average	H	27.75	4.58	42.77	-	-	32.63	54.00	21.37
2 345.61	55.52	Peak	V	27.72	4.58	42.76	-	-	45.06	74.00	28.94
2 314.27	43.10	Average	V	27.84	4.58	42.77	-	-	32.75	54.00	21.25
Test Data for High Channel											
2 483.51	57.90	Peak	H	27.60	4.93	42.73	-	-	47.70	74.00	26.30
2 483.51	50.42	Average	H	27.60	4.93	42.73	-	-	40.22	54.00	13.78
2 488.90	54.46	Peak	V	27.60	4.93	42.73	-	-	44.26	74.00	29.74
2 483.51	45.27	Average	V	27.60	4.93	42.73	-	-	35.07	54.00	18.93

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{ATT} + \text{Duty Factor} - \text{AMP Gain}$$

10.6.2 Spurious & Harmonic Radiated Emission

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 100 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP Gain (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4803.21	50.19	Peak	H	31.50	7.15	42.24	-	46.60	74.00	27.40
4804.66	39.06	Average	H	31.50	7.15	42.24	-	35.47	54.00	18.53
4804.98	50.71	Peak	V	31.50	7.15	42.24	-	47.12	74.00	26.88
4804.12	38.35	Average	V	31.50	7.15	42.24	-	34.76	54.00	19.24
Test Data for Middle Channel										
4878.69	49.00	Peak	H	31.50	6.73	42.24	-	44.99	74.00	29.01
4879.89	37.65	Average	H	31.50	6.73	42.24	-	33.64	54.00	20.36
4879.30	49.71	Peak	V	31.50	6.73	42.24	-	45.70	74.00	28.30
4879.48	38.66	Average	V	31.50	6.73	42.24	-	34.65	54.00	19.35
Test Data for High Channel										
4958.83	50.59	Peak	H	31.64	6.91	42.24	-	46.90	74.00	27.10
4960.78	41.07	Average	H	31.64	6.91	42.24	-	37.38	54.00	16.62
4960.86	50.36	Peak	V	31.64	6.91	42.24	-	46.67	74.00	27.33
4960.83	38.71	Average	V	31.64	6.91	42.24	-	35.02	54.00	18.98

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Duty Factor – AMP Gain

11. POWER SPECTRAL DENSITY

11.1 Operating environment


Temperature : 22 °C

Relative humidity : 41 % R.H.

11.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

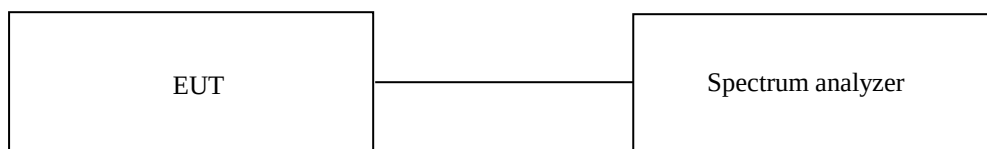

11.3 Test date

November 03, 2025 ~ November 25, 2025

11.4 Test data

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm / 3 kHz)	MARGIN (dB)
LOW	2 402.00	-4.96	8.00	12.96
MIDDLE	2 440.00	-4.19	8.00	12.19
HIGH	2 480.00	-5.52	8.00	13.52

Remark. Margin = Limit –Measured Value

12. RADIATED EMISSION TEST

12.1 Operating environment

Temperature : 22 °C

Relative humidity : 41 % R.H.


12.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

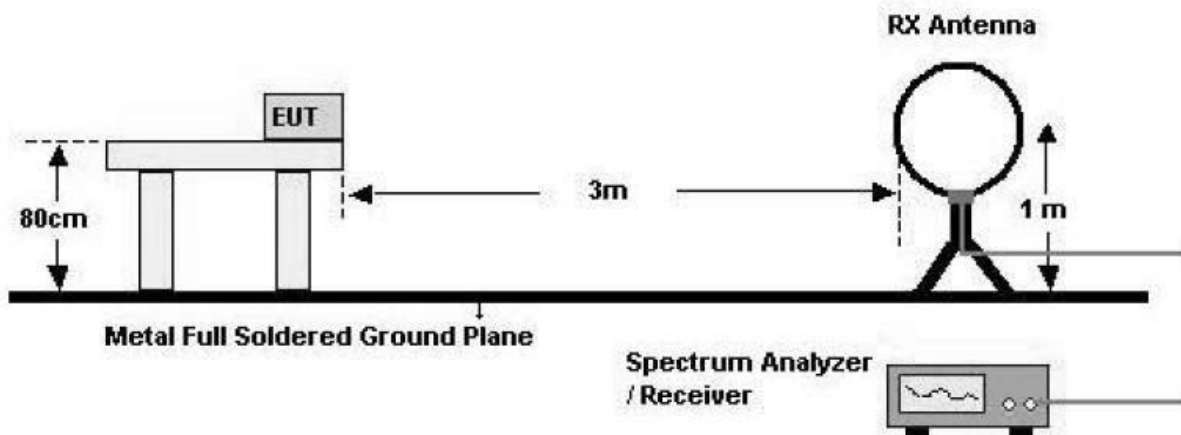

2. 30 MHz - 1 GHz

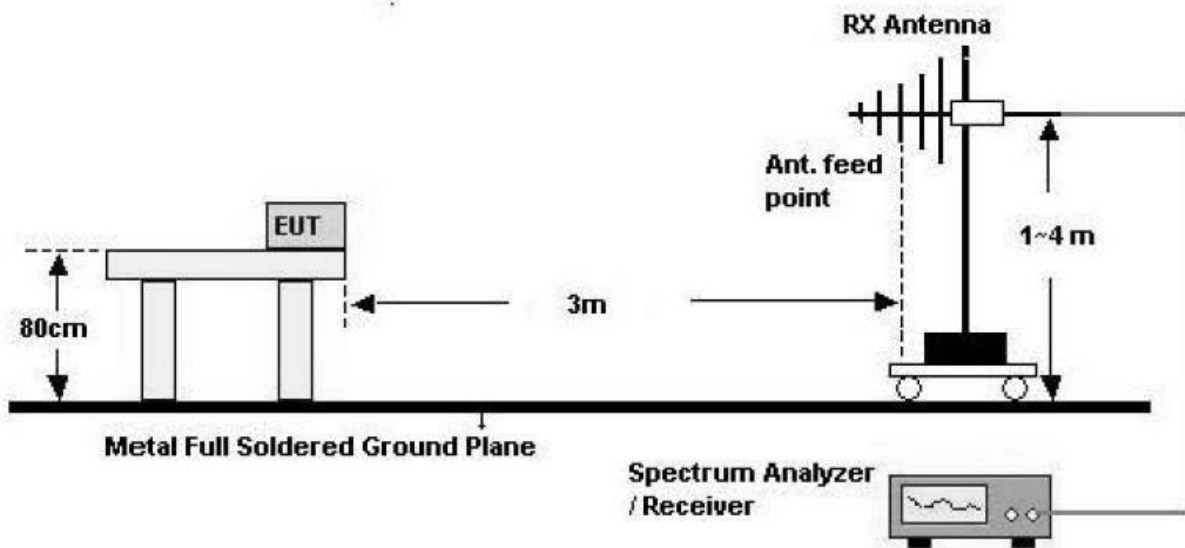

3. Above 1 GHz

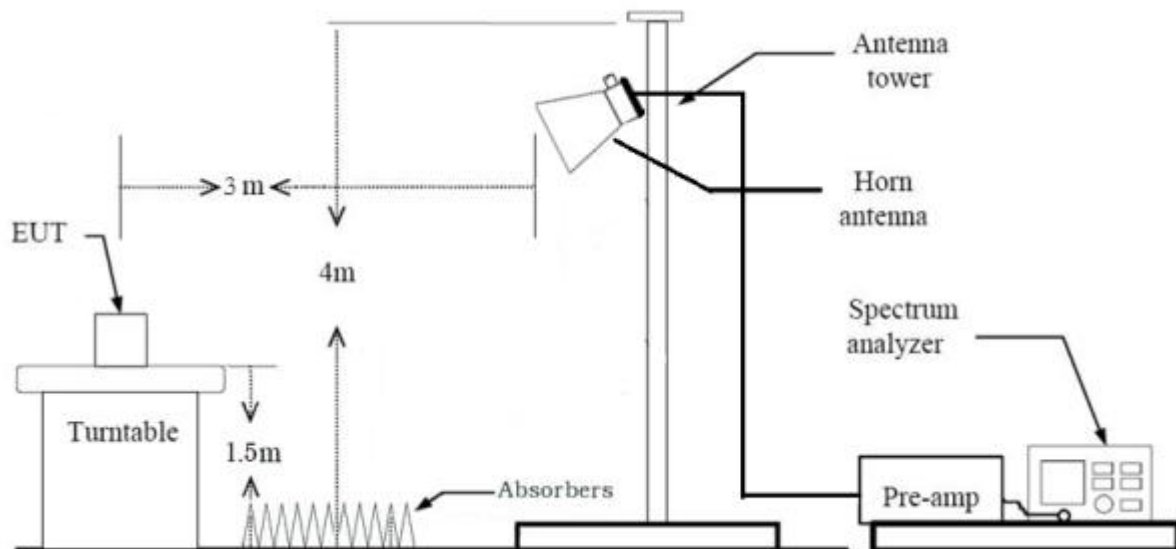

12.3 Test date

November 03, 2025 ~ November 25, 2025


12.4 Test data for 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Josh Edge Remote

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

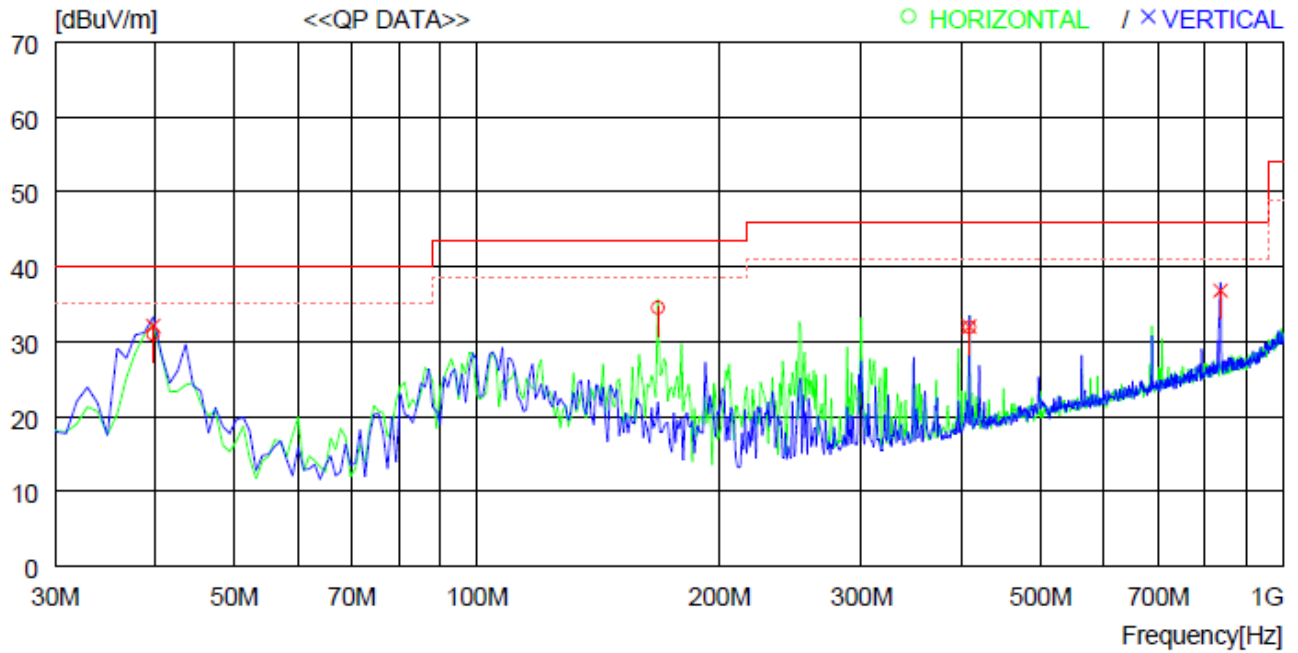

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	39.700	45.0	17.1	0.9	32.0	31.0	40.0	9.0	400	309
2	167.740	47.2	17.4	1.9	32.0	34.5	43.5	9.0	200	0
3	408.300	40.3	21.0	2.8	32.2	31.9	46.0	14.1	200	0
----- Vertical -----										
4	39.700	46.1	17.1	0.9	32.0	32.1	40.0	7.9	100	0
5	408.300	40.4	21.0	2.8	32.2	32.0	46.0	14.0	100	0
6	836.061	37.1	27.3	4.3	31.9	36.8	46.0	9.2	200	302

12.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV30	Rohde & Schwarz	Signal Analyzer	101199	Jan. 13, 2025 (1Y)
ESU	Rohde & Schwarz	EMI Test Receiver	100261	Mar. 05, 2025 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 15, 2025 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 02, 2025 (1Y)
SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Jan. 15, 2025 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 13, 2025 (1Y)
FMZB 1519-60D	Schwarzbeck	Loop Antenna	00113	Jan. 07, 2025 (2Y)
HLP-2008	TDK	Hybrid Antenna	131313	Mar. 21, 2025 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1349	Jun. 27, 2025 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 04, 2025 (1Y)
ESCI	Rohde & Schwarz	EMI TEST RECEIVER	101012	Sep. 24, 2025 (1Y)
NSLK8126	Schwarzbeck	V - LISN (4*16/25A)	8126404	Mar. 11, 2025 (1Y)
ESH3-Z2	Rohde & Schwarz	PULSE LIMITER	100655	Mar. 11, 2025 (1Y)
DT3000	Innco System	Turn Table	DT3000/093	N/A
MA4000-EP	Innco System	Antenna Master	MA4000/332/27030611/L	N/A
CO3000	Innco System	Controller	CO3000/904/37211215/L	N/A