

FCC Test Report

Equipment : Wireless 802.11 ac/a/b/g/n Access Point
Brand Name : Senao Networks
Model No. : CAP7252AG, CAP7253AG
FCC ID : U2M-CAP7252AG
Standard : 47 CFR FCC Part 15.407
Operating Band : 5725 MHz – 5850 MHz
FCC Classification : NII
Applicant : Senao Networks, Inc.
3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan,
R.O.C

The product sample received on Apr. 16, 2014 and completely tested on Aug. 27, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



James Fan / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	8
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT.....	10
2.1	The Worst Case Modulation Configuration	10
2.2	The Worst Case Power Setting Parameter	10
2.3	The Worst Case Measurement Configuration.....	11
2.4	Test Setup Diagram	13
3	TRANSMITTER TEST RESULT	14
3.1	AC Power-line Conducted Emissions	14
3.2	Emission Bandwidth	23
3.3	RF Output Power.....	28
3.4	Peak Power Spectral Density.....	32
3.5	Transmitter Radiated Unwanted Emissions and Band Edge	36
3.6	Frequency Stability.....	83
4	TEST EQUIPMENT AND CALIBRATION DATA	86
	APPENDIX A. TEST PHOTOS	A1-A12

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.3	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.375MHz 47.04 (Margin 1.35dB) – AV 52.56 (Margin 5.83dB) – QP	FCC 15.207	Complied
3.2	15.407(a)	Emission Bandwidth	26dB Bandwidth [MHz] 20M: 45.51 / 40M: 61.91 80M: 93.91 6dB Bandwidth [MHz] 20M: 16.35 / 40M: 36.41 80M: 75.83	Information only for 26dB bandwidth 500kHz for 6dB bandwidth	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted (Average) Output Power)	Power [dBm] 5725-5850MHz: 25.94	Power [dBm] 5725-5850MHz: 30	Complied
3.4	15.407(a)	Peak Power Spectral Density	PPSD [dBm/MHz] 5725-5850MHz: 11.42	PPSD [dBm/500kHz] 5725-5850MHz: 30	Complied
3.5	15.407(b)	Transmitter Unwanted Emissions and Band Edge	Restricted Bands [dBuV/m at 3m]: 5725.00MHz 77.20 (Margin 1.00dB) – PK 5715.00MHz 73.00 (Margin 1.00dB) – PK 5850.00MHz 77.20 (Margin 1.00dB) – PK 5715.00MHz 53.00 (Margin 1.00dB) – AV	Non-Restricted Bands: ≤ -27dBm (68.2dBuV/m@3m) Restricted Bands: FCC 15.209	Complied
3.6	15.407(g)	Frequency Stability	6.6171 ppm	Signal shall remain in-band	Complied

Revision History

[illegible]

1 General Description

1.1 Information

1.1.1 Feature of Equipment under Test

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Senao Networks	CAP7252AG	Wireless 802.11 ac/a/b/g/n Access Point	Internal PIFA antenna
	CAP7253AG		External Dipole antenna

1.1.2 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
Internal antenna						
5725-5850	a	5745-5825	149-165 [5]	2	25.82	Yes
5725-5850	n(HT20)	5745-5825	149-165 [5]	2	25.81	Yes
5725-5850	n(HT40)	5755-5795	151-159 [2]	2	22.96	Yes
5725-5850	ac(VHT20)	5745-5825	149-165 [5]	2	25.94	Yes
5725-5850	ac(VHT40)	5755-5795	151-159 [2]	2	23.05	Yes
5725-5850	ac(VHT80)	5775	155 [1]	2	15.78	Yes
External antenna						
5725-5850	a	5745-5825	149-165 [5]	2	25.75	Yes
5725-5850	n(HT20)	5745-5825	149-165 [5]	2	25.67	Yes
5725-5850	n(HT40)	5755-5795	151-159 [2]	2	23.51	Yes
5725-5850	ac(VHT20)	5745-5825	149-165 [5]	2	25.76	Yes
5725-5850	ac(VHT40)	5755-5795	151-159 [2]	2	23.62	Yes
5725-5850	ac(VHT80)	5775	155 [1]	2	16.21	Yes
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. Note 3: 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation. Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)						

1.1.3 Antenna Information

Antenna Category	
☒	Integral antenna (antenna permanently attached)
☒	Temporary RF connector provided
☐	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☒	External antenna (dedicated antennas)
☐	Single power level with corresponding antenna(s).
☒	Multiple power level and corresponding antenna(s).
☒	RF connector provided
☒	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
☐	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information						
No.	Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	5718A0075300	PIFA	I-Pex	3.52	---	
2	5718A0074300	PIFA	I-Pex	3.16	---	
3	5718A0077300	PIFA	I-Pex	---	5.40	5.23
4	5718A0076300	PIFA	I-Pex	---	4.08	5.68
5	7102A0300000	Dipole	R SMA	4.42	---	---
6	7102A0300000	Dipole	R SMA	4.42	---	---
7	7102A0301000	Dipole	R SMA	---	3.18	2.95
8	7102A0301000	Dipole	R SMA	---	3.18	2.95

1.1.4 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	☐ Production ; ☒ Pre-Production ; ☐ Prototype
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...

1.1.5 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
☐ Operated normally mode for worst duty cycle	
☒ Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
☒ 98.26% - IEEE 802.11a	0.08
☒ 98.15% - IEEE 802.11ac (VHT20)	0.08
☒ 94.93% - IEEE 802.11ac (VHT40)	0.23
☒ 88.46% - IEEE 802.11ac (VHT80)	0.53

1.1.6 EUT Operational Condition

Supply Voltage	12Vdc from adapter, 48Vdc from POE		
Test Voltage	☒ Vnom (120 V)	☒ Vmax (138 V)	☒ Vmin (102 V)
Test Climatic	☒ Tnom (20°C)	☒ Tmax (50°C)	☒ Tmin (-30°C)

1.2 Accessories and Support Equipment

Accessories		
No.	Equipment	Description
1	Power Supply Type 1 Adapter	Brand: Powertron Electronics Corp. Model: PA1015-2I I/P: 100-240Vac, 50-60Hz, 0.4A O/P: 12Vdc, 1.25A, 15W Power line: 1.2m non-shielded with one core
2	Power Supply Type 2 With POE injector (Model: NPE-5818) **Support unit only	Brand: Powertron Electronics Corp. Model: PA1040-480IB080 I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 48Vdc, 0.8A, 38.4W max Power line: 1.5m non-shielded with one core

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E6440	DoC
2	POE	Ruckus	NPE-5818	---

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 662911 v02r01
- ♦ FCC KDB 412172 v01

1.4 Testing Location Information

Testing Location				
☒	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456	FAX : 886-3-327-0973	
☒	ICC Lab	ADD : No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.		
		TEL : 886-3-271-8640	FAX : 886-3-327-0973	
Test Condition		Test Site No.	Test Engineer	Test Date
RF Conducted		TH01-HY	Mark Liao	Aug. 27, 2014
AC Conduction		*CO01-WS	Skys Huang	Jul. 24, 2014
Radiated Emission		*03CH01-WS	Anderson Hung	Jun. 10 ~ Jul. 17, 2014
Test site registered number [657002] with FCC				
Test site registered number [10807A-1] with IC				

Note: * Sporton Lab subcontracts this test item to ICC lab (TAF:2732).

ICC lab is a TAF accreditation test firm and also is an approved provider of Sporton Lab.

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.92 dB	N/A
Emission bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
All emissions, radiated	30 – 1000 MHz	±3.26 dB	N/A
	Above 1 GHz	±4.94 dB	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing (5150-5250MHz)			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS
11a	2	6-54Mbps	6 Mbps
HT20	2	MCS 0-15	MCS 0
HT40	2	MCS 0-15	MCS 0
VHT20	2	MCS 0-8	MCS 0
VHT40	2	MCS 0-9	MCS 0
VHT80	2	MCS 0-9	MCS 0

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter (5150-5250MHz band)							
Test Software	ART2-GUI, Version: 4_9_575_5_CS_U3						
Internal antenna							
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5745	5785	5825	5755	5795	5775
11a,6-54Mbps	2	17	22	17	--	--	--
HT20,M0-15	2	16.5	22	16.5	--	--	--
HT40,M0-15	2	--	--	--	13.5	19.5	--
VHT20,M0-8	2	16.5	22	16.5	--	--	--
VHT40,M0-9	2	--	--	--	13.5	19.5	--
VHT80,M0-9	2	--	--	--	--	--	12
External antenna							
Modulation Mode	N _{TX}	Test Frequency (MHz)					
		NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
		5745	5785	5825	5755	5795	5775
11a,6-54Mbps	2	17	21	18	--	--	--
HT20,M0-15	2	16.5	21	17.5	--	--	--
HT40,M0-15	2	--	--	--	14.5	20	--
VHT20,M0-8	2	16.5	21	17.5	--	--	--
VHT40,M0-9	2	--	--	--	14.5	20	--
VHT80,M0-9	2	--	--	--	--	--	12

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
	1. Internal antenna with adapter mode
	2. Internal antenna with POE mode
	3. External antenna with adapter mode
	4. External antenna with POE mode


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, HT20, HT40, VHT20, VHT40, VHT80
Operating Mode	Operating Mode Description
	1. Internal antenna with adapter mode
	2. External antenna with adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Peak Power Spectral Density, Emission Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	11a, VHT20, VHT40, VHT80
Operating Mode	Operating Mode Description
	1. Internal antenna with adapter mode
	2. External antenna with adapter mode


The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
User Position	☐ EUT will be placed in fixed position.		
	☒ EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes are Y-plane for internal antenna and X-plane for external antenna.		
	☐ EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst planes is Z.		
Operating Mode	☒ 1. Internal antenna with adapter mode		
	☒ 2. Internal antenna with POE mode		
	☒ 3. External antenna with adapter mode		
	☒ 4. External antenna with POE mode		
Modulation Mode	11a, VHT20, VHT40, VHT80		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.4 Test Setup Diagram

Test Setup Diagram - Radiated Test - adapter mode

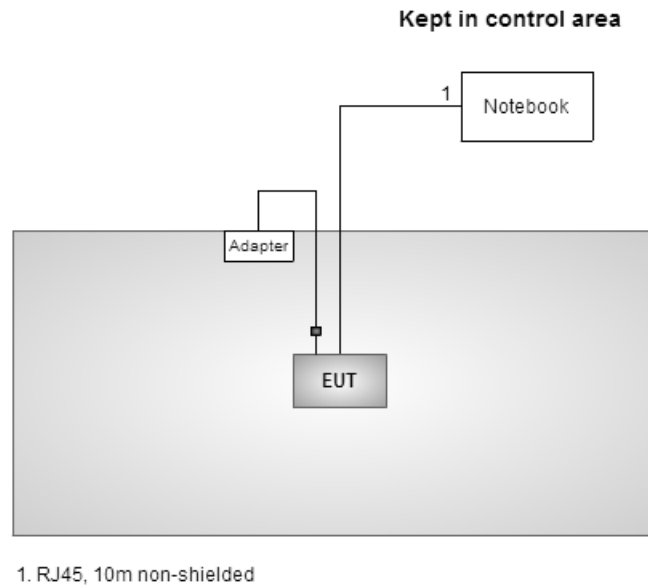

Test Setup Diagram - Radiated Test - POE mode

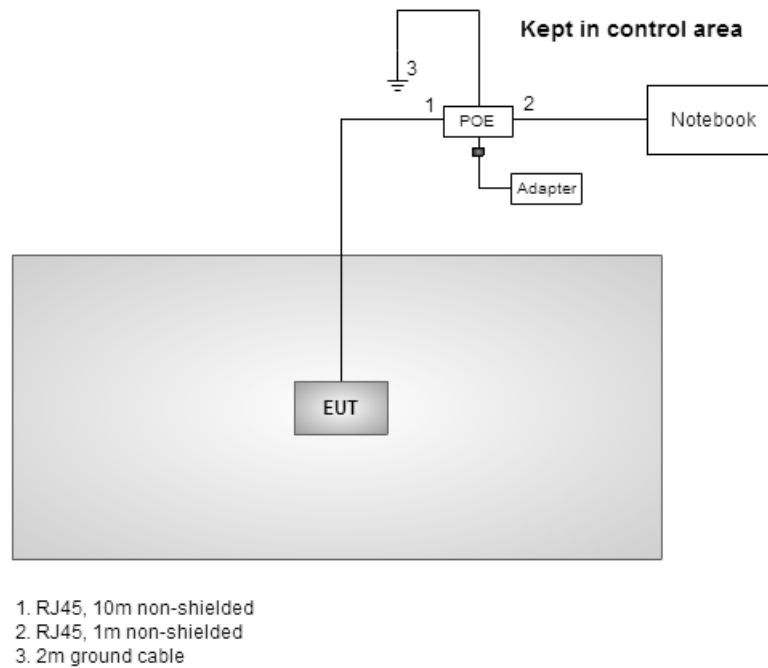

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method	
☒	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

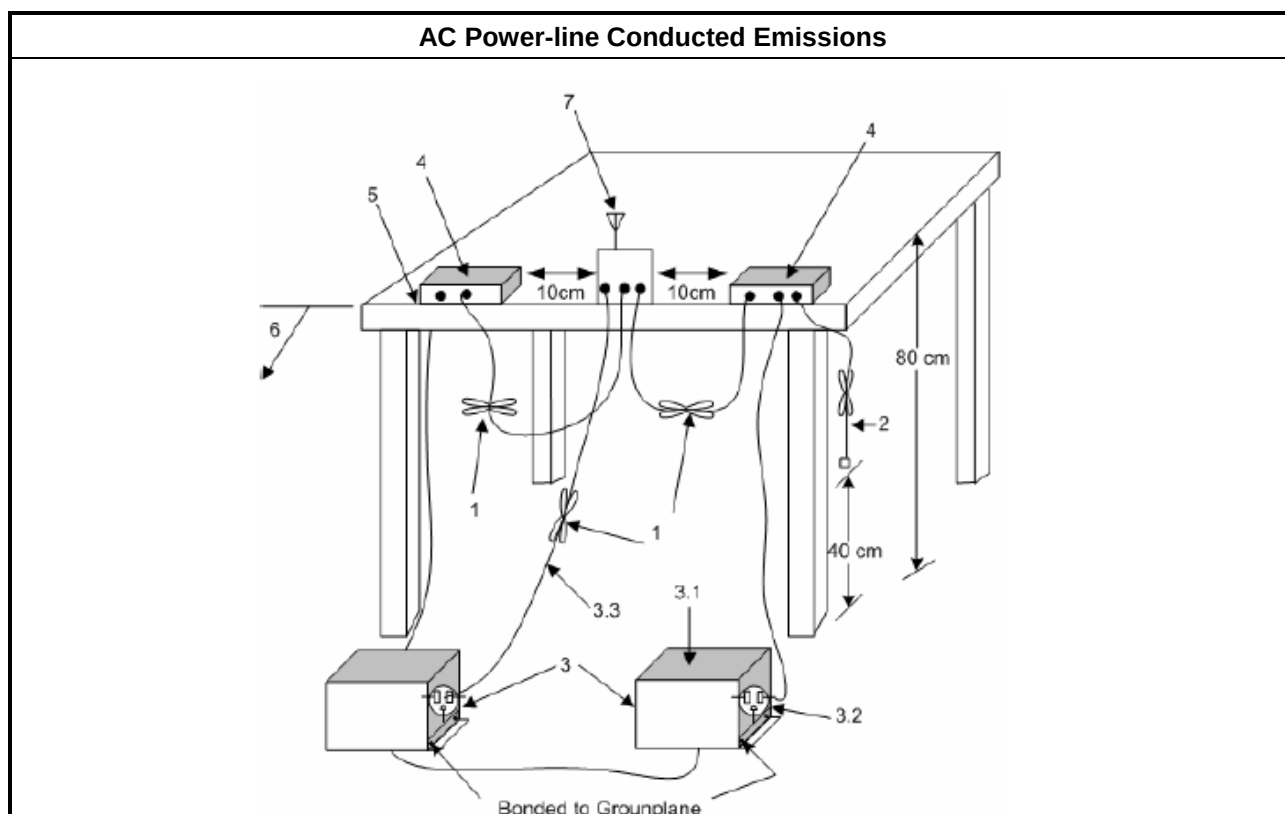


3.1.5 Test Result of AC Power-line Conducted Emissions

Mode 1: Internal antenna with adapter mode

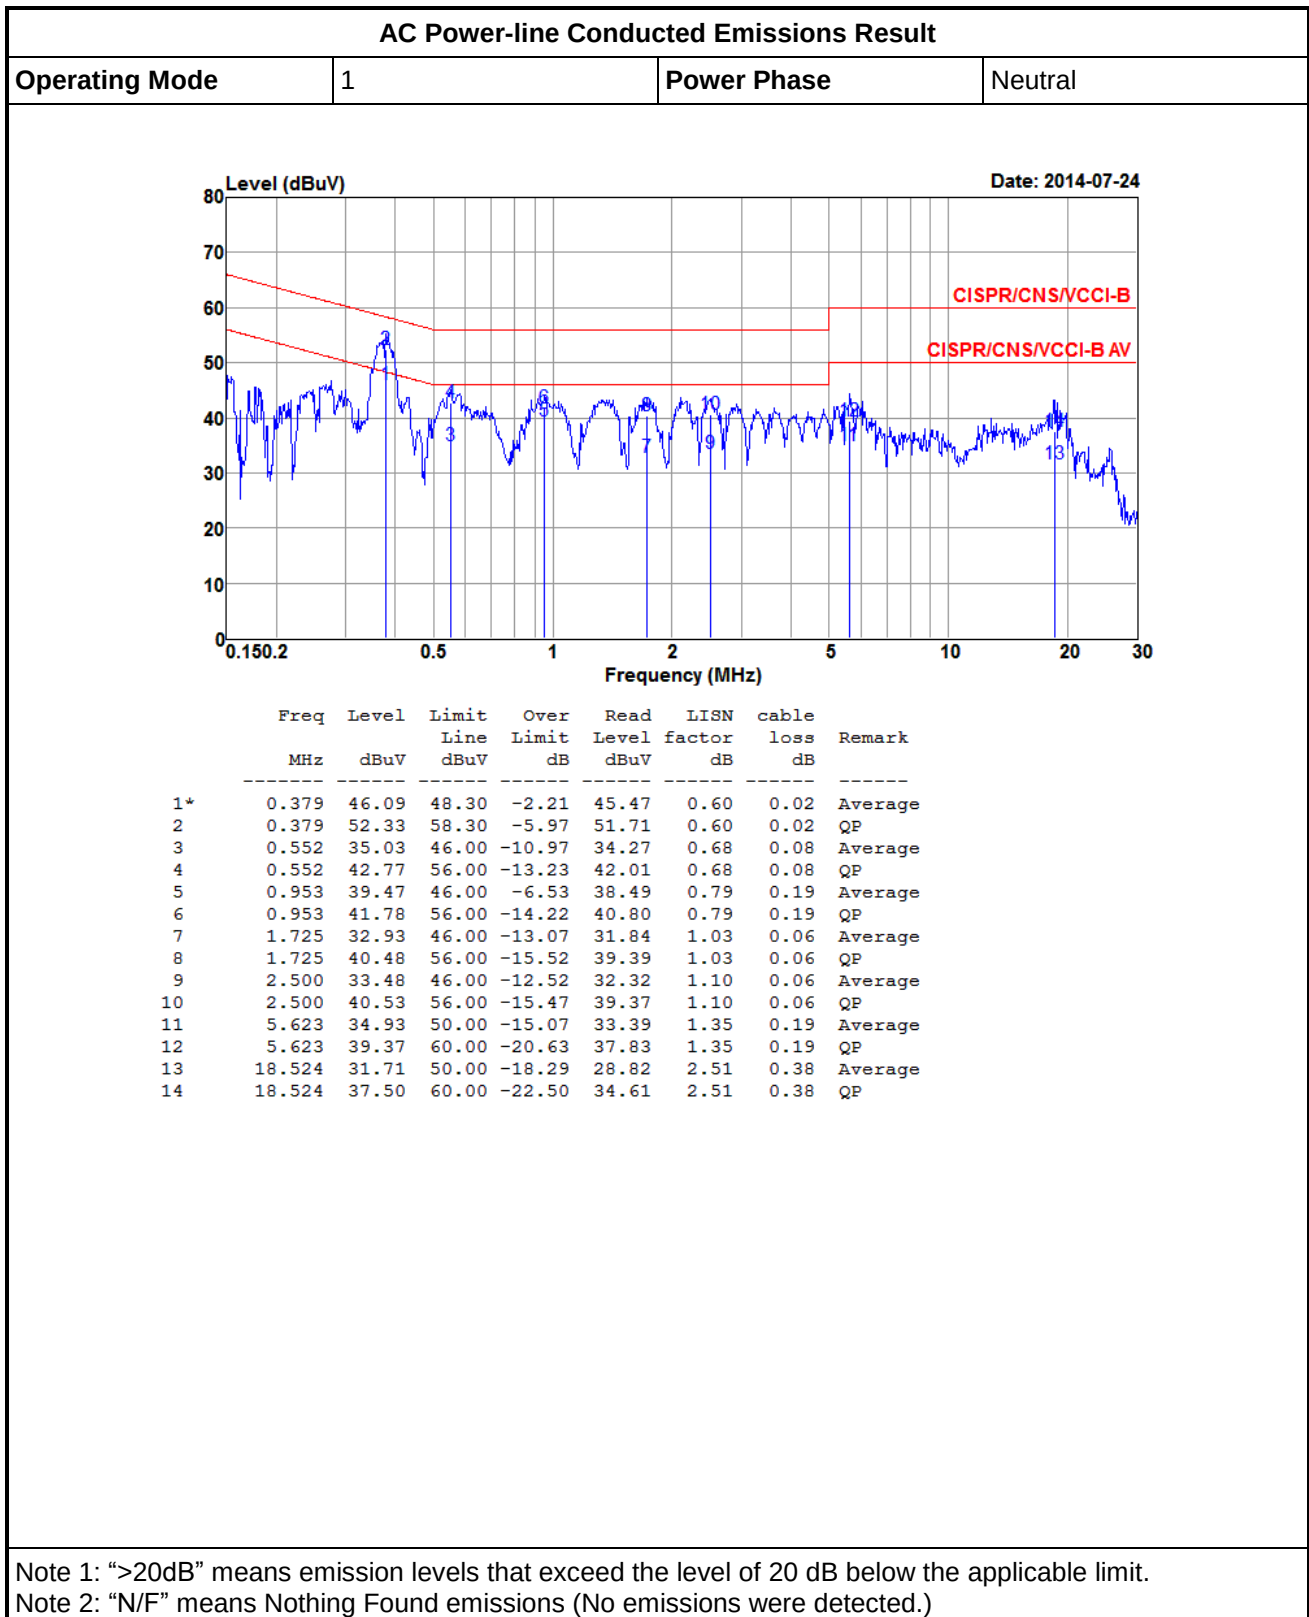

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
----------------	---	-------------	------

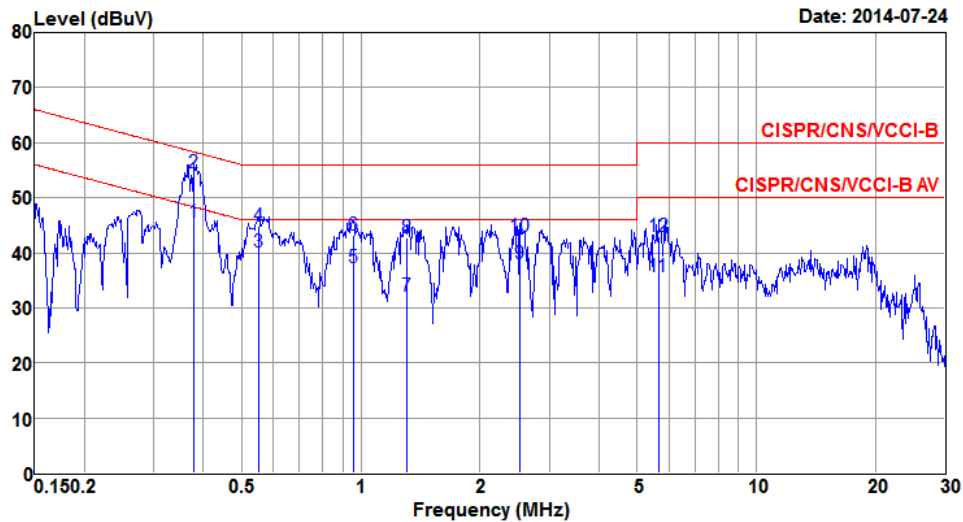


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.379	45.66	48.30	-2.64	45.12	0.52	0.02	Average
2	0.379	54.51	58.30	-3.79	53.97	0.52	0.02	QP
3	0.552	40.05	46.00	-5.95	39.37	0.60	0.08	Average
4	0.552	44.79	56.00	-11.21	44.11	0.60	0.08	QP
5	0.958	37.19	46.00	-8.81	36.28	0.72	0.19	Average
6	0.958	43.13	56.00	-12.87	42.22	0.72	0.19	QP
7	1.310	32.22	46.00	-13.78	31.25	0.84	0.13	Average
8	1.310	42.63	56.00	-13.37	41.66	0.84	0.13	QP
9	2.527	37.89	46.00	-8.11	36.80	1.03	0.06	Average
10	2.527	43.07	56.00	-12.93	41.98	1.03	0.06	QP
11	5.653	35.76	50.00	-14.24	34.27	1.30	0.19	Average
12	5.653	42.87	60.00	-17.13	41.38	1.30	0.19	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Mode 2: Internal antenna with POE mode
AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Neutral
----------------	---	-------------	---------

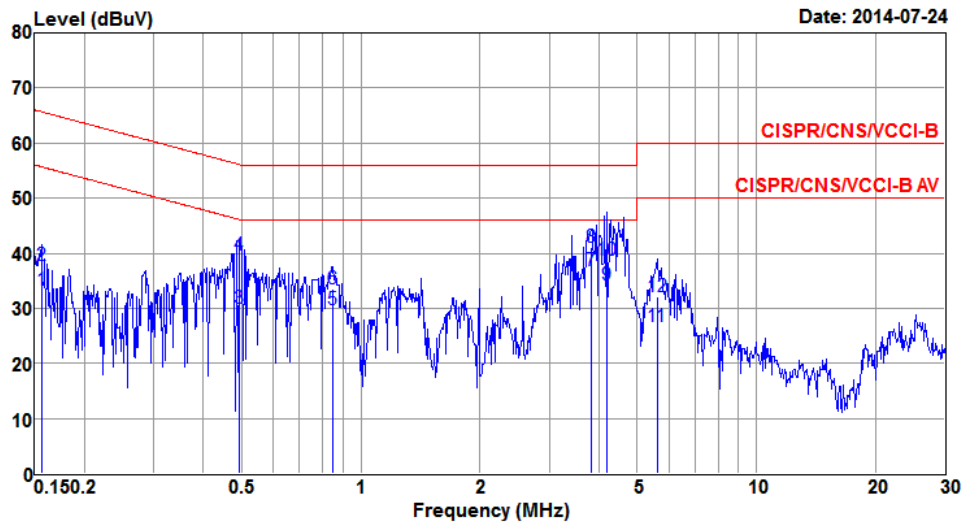


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	33.40	55.69	-22.29	32.89	0.49	0.02	Average
2	0.156	37.76	65.69	-27.93	37.25	0.49	0.02	QP
3	0.491	30.09	46.14	-16.05	29.38	0.65	0.06	Average
4	0.491	39.58	56.14	-16.56	38.87	0.65	0.06	QP
5	0.848	29.68	46.00	-16.32	28.75	0.76	0.17	Average
6	0.848	33.56	56.00	-22.44	32.63	0.76	0.17	QP
7*	3.820	36.71	46.00	-9.29	35.44	1.13	0.14	Average
8	3.820	41.01	56.00	-14.99	39.74	1.13	0.14	QP
9	4.180	34.23	46.00	-11.77	32.92	1.16	0.15	Average
10	4.180	38.65	56.00	-17.35	37.34	1.16	0.15	QP
11	5.623	26.66	50.00	-23.34	25.12	1.35	0.19	Average
12	5.623	32.22	60.00	-27.78	30.68	1.35	0.19	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
----------------	---	-------------	------

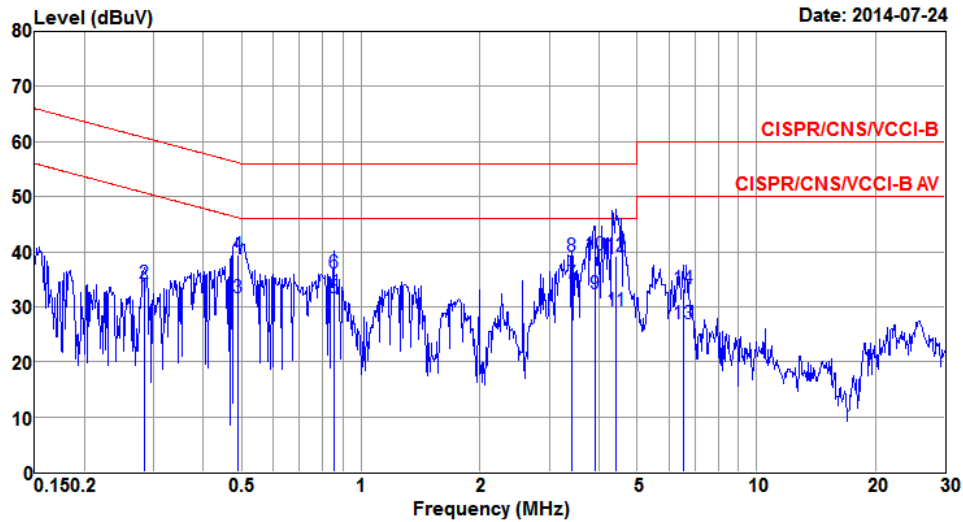


	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.283	31.76	50.72	-18.96	31.28	0.47	0.01	Average
2	0.283	34.20	60.72	-26.52	33.72	0.47	0.01	QP
3	0.489	31.58	46.19	-14.61	30.95	0.57	0.06	Average
4	0.489	39.46	56.19	-16.73	38.83	0.57	0.06	QP
5	0.853	31.55	46.00	-14.45	30.69	0.69	0.17	Average
6	0.853	36.01	56.00	-19.99	35.15	0.69	0.17	QP
7*	3.417	34.16	46.00	-11.84	32.98	1.06	0.12	Average
8	3.417	39.23	56.00	-16.77	38.05	1.06	0.12	QP
9	3.901	32.29	46.00	-13.71	31.07	1.07	0.15	Average
10	3.901	39.36	56.00	-16.64	38.14	1.07	0.15	QP
11	4.430	29.38	46.00	-16.62	28.08	1.14	0.16	Average
12	4.430	39.24	56.00	-16.76	37.94	1.14	0.16	QP
13	6.523	26.91	50.00	-23.09	25.31	1.40	0.20	Average
14	6.523	33.37	60.00	-26.63	31.77	1.40	0.20	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Mode 3: External antenna with adapter mode
AC Power-line Conducted Emissions Result

Operating Mode	3	Power Phase	Neutral
----------------	---	-------------	---------

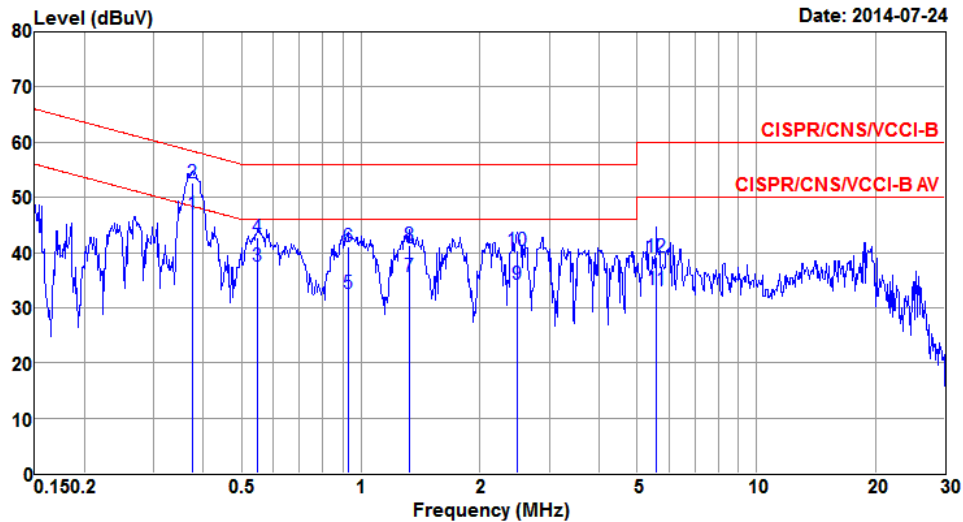


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.375	47.04	48.39	-1.35	46.42	0.60	0.02	Average
2	0.375	52.56	58.39	-5.83	51.94	0.60	0.02	QP
3	0.549	37.52	46.00	-8.48	36.76	0.68	0.08	Average
4	0.549	42.68	56.00	-13.32	41.92	0.68	0.08	QP
5	0.928	32.55	46.00	-13.45	31.58	0.78	0.19	Average
6	0.928	41.18	56.00	-14.82	40.21	0.78	0.19	QP
7	1.324	35.65	46.00	-10.35	34.60	0.92	0.13	Average
8	1.324	41.31	56.00	-14.69	40.26	0.92	0.13	QP
9	2.487	34.13	46.00	-11.87	32.97	1.10	0.06	Average
10	2.487	40.34	56.00	-15.66	39.18	1.10	0.06	QP
11	5.594	33.34	50.00	-16.66	31.81	1.34	0.19	Average
12	5.594	39.11	60.00	-20.89	37.58	1.34	0.19	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	3	Power Phase	Line
----------------	---	-------------	------

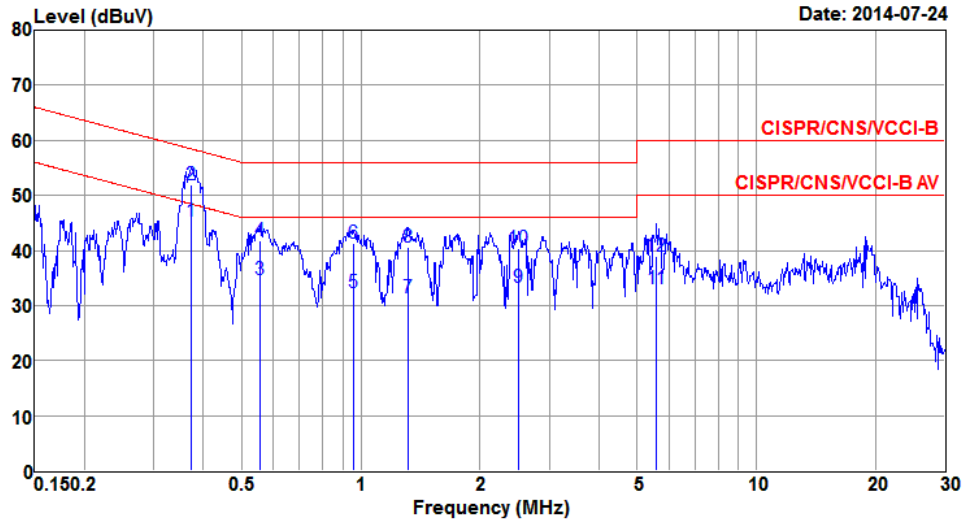


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1*	0.373	45.33	48.43	-3.10	44.79	0.52	0.02	Average
2	0.373	52.03	58.43	-6.40	51.49	0.52	0.02	QP
3	0.558	34.68	46.00	-11.32	33.99	0.60	0.09	Average
4	0.558	41.81	56.00	-14.19	41.12	0.60	0.09	QP
5	0.958	32.42	46.00	-13.58	31.51	0.72	0.19	Average
6	0.958	41.31	56.00	-14.69	40.40	0.72	0.19	QP
7	1.317	31.31	46.00	-14.69	30.34	0.84	0.13	Average
8	1.317	40.61	56.00	-15.39	39.64	0.84	0.13	QP
9	2.513	33.20	46.00	-12.80	32.11	1.03	0.06	Average
10	2.513	40.40	56.00	-15.60	39.31	1.03	0.06	QP
11	5.594	33.07	50.00	-16.93	31.58	1.30	0.19	Average
12	5.594	39.02	60.00	-20.98	37.53	1.30	0.19	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

Mode 4: External antenna with POE mode
AC Power-line Conducted Emissions Result

Operating Mode	4	Power Phase	Neutral
----------------	---	-------------	---------

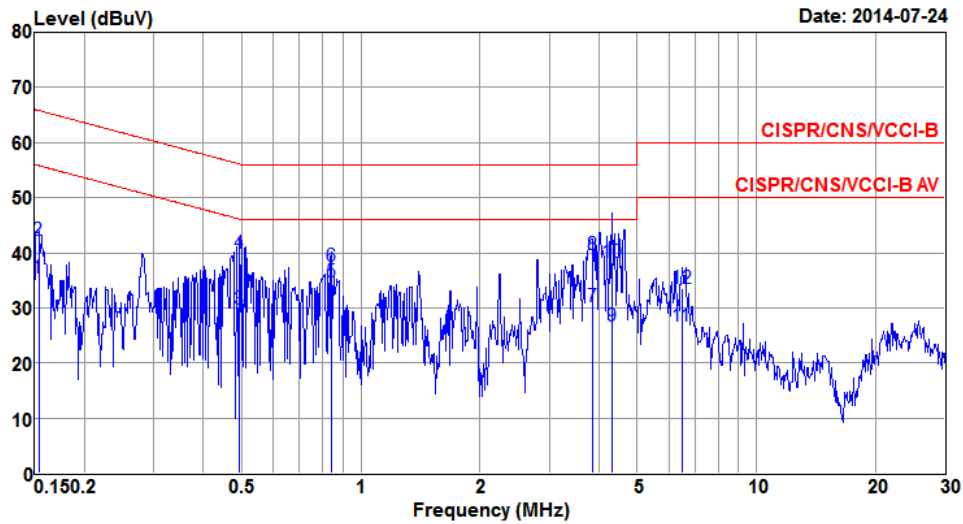


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	35.35	55.82	-20.47	34.84	0.49	0.02	Average
2	0.153	42.30	65.82	-23.52	41.79	0.49	0.02	QP
3	0.491	29.65	46.14	-16.49	28.94	0.65	0.06	Average
4	0.491	39.97	56.14	-16.17	39.26	0.65	0.06	QP
5*	0.844	34.80	46.00	-11.20	33.87	0.76	0.17	Average
6	0.844	37.47	56.00	-18.53	36.54	0.76	0.17	QP
7	3.840	30.32	46.00	-15.68	29.05	1.13	0.14	Average
8	3.840	39.61	56.00	-16.39	38.34	1.13	0.14	QP
9	4.315	26.72	46.00	-19.28	25.38	1.18	0.16	Average
10	4.315	38.14	56.00	-17.86	36.80	1.18	0.16	QP
11	6.488	26.76	50.00	-23.24	25.12	1.44	0.20	Average
12	6.488	33.49	60.00	-26.51	31.85	1.44	0.20	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	4	Power Phase	Line
----------------	---	-------------	------

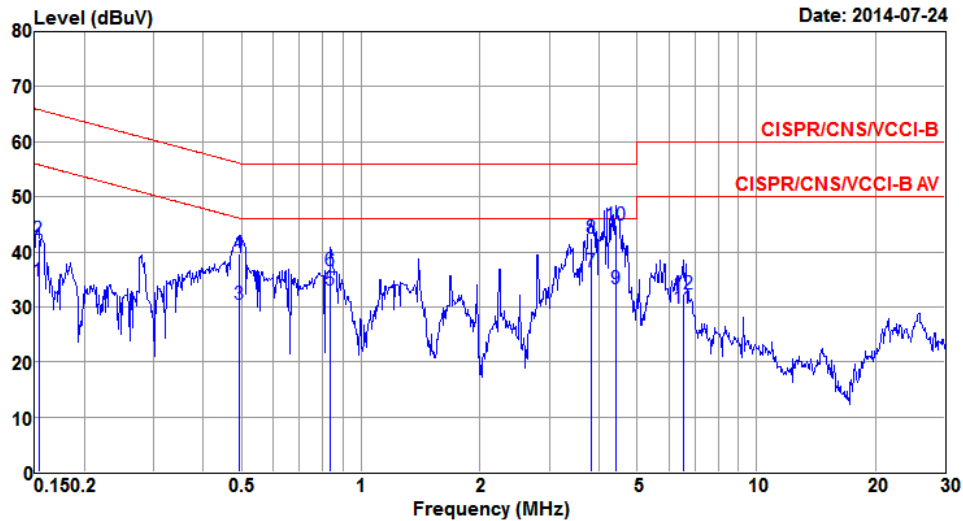

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	34.72	55.82	-21.10	34.29	0.41	0.02	Average
2	0.153	42.22	65.82	-23.60	41.79	0.41	0.02	QP
3	0.491	30.56	46.14	-15.58	29.93	0.57	0.06	Average
4	0.491	39.66	56.14	-16.48	39.03	0.57	0.06	QP
5	0.839	33.01	46.00	-12.99	32.16	0.69	0.16	Average
6	0.839	36.69	56.00	-19.31	35.84	0.69	0.16	QP
7*	3.820	36.34	46.00	-9.66	35.13	1.07	0.14	Average
8	3.820	42.48	56.00	-13.52	41.27	1.07	0.14	QP
9	4.430	33.40	46.00	-12.60	32.10	1.14	0.16	Average
10	4.430	44.86	56.00	-11.14	43.56	1.14	0.16	QP
11	6.523	29.69	50.00	-20.31	28.09	1.40	0.20	Average
12	6.523	32.42	60.00	-27.58	30.82	1.40	0.20	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth (EBW) Limit	
Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause C for EBW / 6dB bandwidth and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.
☒	For conducted measurement.
☐	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☐	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
☒	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

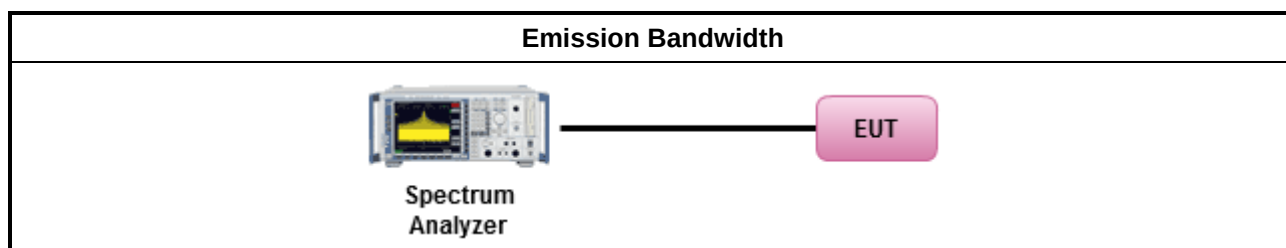


3.2.5 Test Result of Emission Bandwidth

Mode 1: Internal antenna with adapter mode


UNII Emission Bandwidth Result														
Condition			Emission Bandwidth (MHz)											
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				26dB Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11a	2	5745	17.08	16.85	--	--	23.54	22.49	--	--	16.46	16.41	--	--
11a	2	5785	20.77	17.80	--	--	42.68	30.65	--	--	16.35	16.35	--	--
11a	2	5825	17.19	16.79	--	--	23.88	22.43	--	--	16.35	16.35	--	--
VHT20	2	5745	18.18	17.89	--	--	24.17	23.13	--	--	17.62	16.93	--	--
VHT20	2	5785	21.71	19.32	--	--	45.51	41.09	--	--	17.62	17.57	--	--
VHT20	2	5825	18.18	18.06	--	--	24.58	24.00	--	--	17.62	17.62	--	--
VHT40	2	5755	37.74	37.28	--	--	49.28	47.19	--	--	36.41	36.41	--	--
VHT40	2	5795	37.74	37.40	--	--	54.96	46.96	--	--	36.41	36.41	--	--
VHT80	2	5775	76.64	76.18	--	--	93.91	89.28	--	--	75.83	75.83	--	--
Result			Complied											

Worst Emission Bandwidth Plots


99% Bandwidth

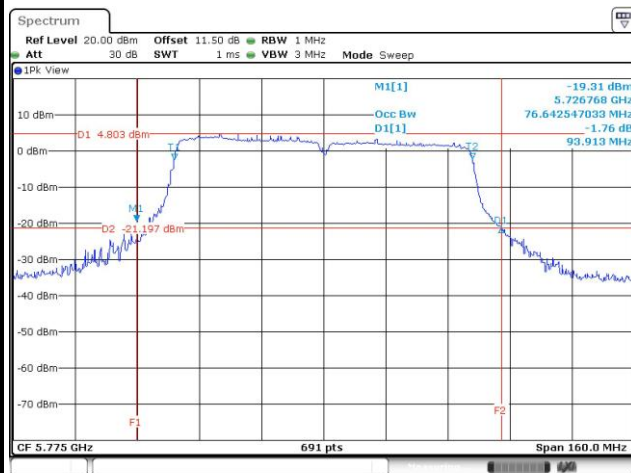

26dB Bandwidth

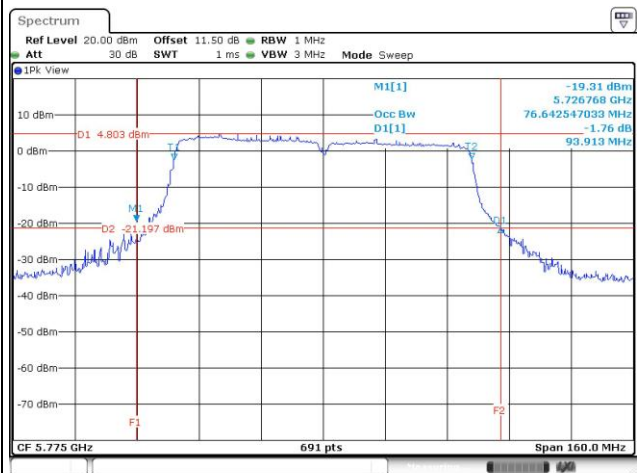

6dB Bandwidth

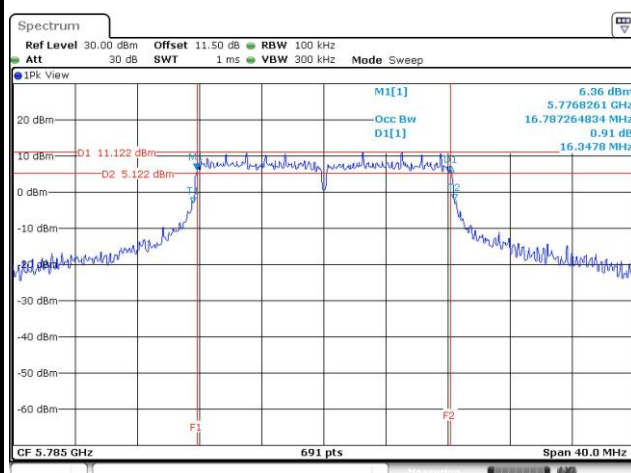

--


--

Mode 2: External antenna with adapter mode


UNII Emission Bandwidth Result														
Condition			Emission Bandwidth (MHz)											
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				26dB Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4	Chain-Port 1	Chain-Port 2	Chain-Port 3	Chain-Port 4
11a	2	5745	17.08	16.85	--	--	23.30	22.67	--	--	16.46	16.46	--	--
11a	2	5785	18.31	18.81	--	--	32.68	37.68	--	--	16.35	16.35	--	--
11a	2	5825	17.13	16.90	--	--	23.59	22.67	--	--	16.35	16.35	--	--
VHT20	2	5745	18.12	18.18	--	--	24.35	24.35	--	--	17.57	17.62	--	--
VHT20	2	5785	19.54	20.19	--	--	40.07	42.75	--	--	17.62	17.62	--	--
VHT20	2	5825	18.29	18.12	--	--	24.58	24.99	--	--	17.62	17.62	--	--
VHT40	2	5755	37.63	37.51	--	--	48.46	46.61	--	--	36.41	36.41	--	--
VHT40	2	5795	37.86	37.63	--	--	54.38	61.91	--	--	36.41	36.41	--	--
VHT80	2	5775	76.64	76.41	--	--	91.36	92.75	--	--	75.83	75.83	--	--
Result			Complied											

Worst Emission Bandwidth Plots


99% Bandwidth

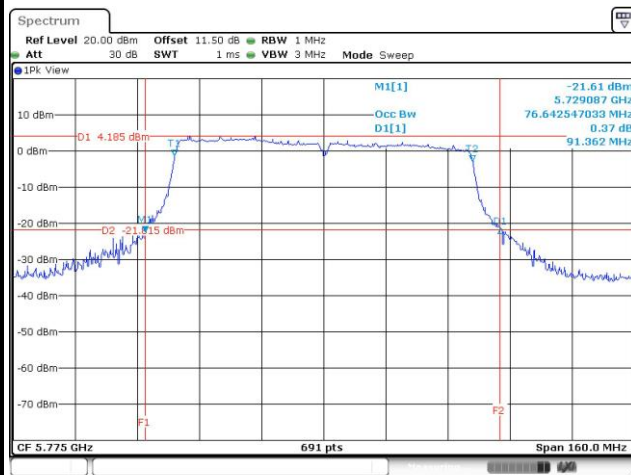

26dB Bandwidth

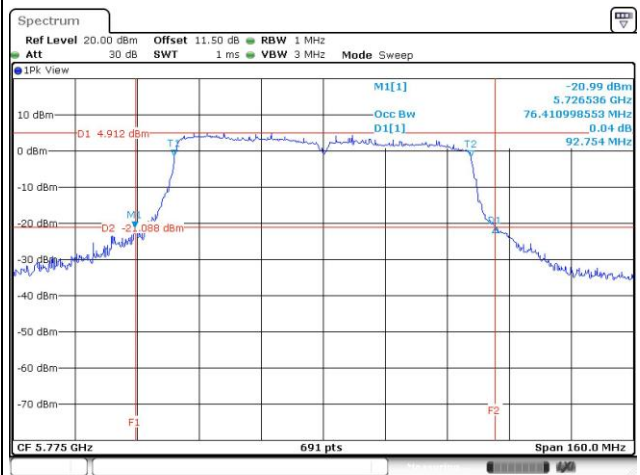

6dB Bandwidth

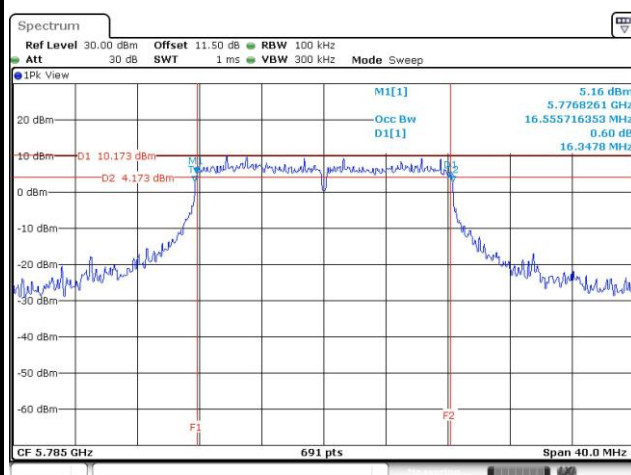

--

--

3.3 RF Output Power

3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit
The maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
☒ Maximum Conducted Output Power
☐ Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 (spectral trace averaging).
☐ Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
☐ Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 (spectral trace averaging).
☐ Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor
☒ Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method PM-G (using a gated RF average power meter).
☒ For conducted measurement.
☐ The EUT supports single transmit chain and measurements performed on this transmit chain.
☐ The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒ The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☒ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

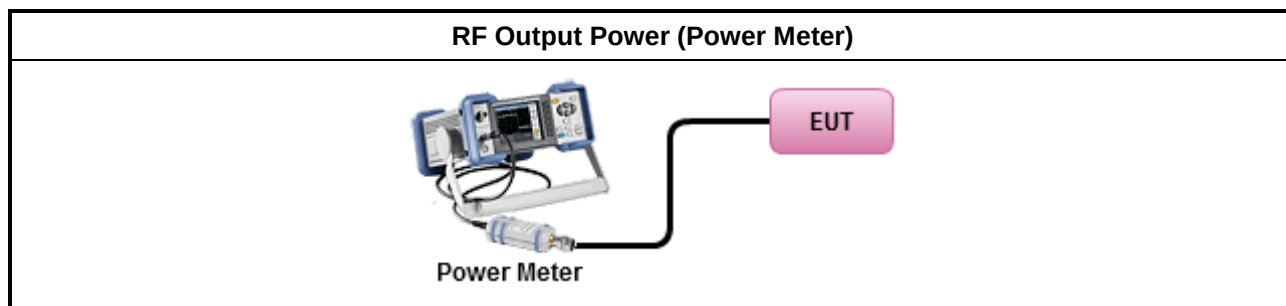

3.3.5 Directional Gain for Power Measurement

Mode 1: Internal antenna with adapter mode

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G_{ANT} (dBi)		5.23	5.68	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	5.68	2	1	-	-
HT20,M0-15	5.68	2	1	-	-
HT40,M0-15	5.68	2	1	-	-
VHT20,M0-8	5.68	2	1	-	-
VHT40,M0-9	5.68	2	1	-	-
VHT80,M0-9	5.68	2	1	-	-

Note: Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain

Mode 2: External antenna with adapter mode

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G_{ANT} (dBi)		2.95	2.95	-	-
Modulation Mode	DG (dBi)	N_{TX}	N_{SS}	STBC	Array Gain (dB)
11a,6-54Mbps	2.95	2	1	-	-
HT20,M0-15	2.95	2	1	-	-
HT40,M0-15	2.95	2	1	-	-
VHT20,M0-8	2.95	2	1	-	-
VHT40,M0-9	2.95	2	1	-	-
VHT80,M0-9	2.95	2	1	-	-

3.3.6 Test Result of Maximum Conducted Output Power

Mode 1: Internal antenna with adapter mode

Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	2	5745	18.31	17.58	--	--	20.97	30.00	5.68	26.65	36.00
11a	2	5785	23.39	22.14	--	--	25.82	30.00	5.68	31.50	36.00
11a	2	5825	18.51	17.42	--	--	21.01	30.00	5.68	26.69	36.00
HT20	2	5745	17.89	16.95	--	--	20.46	30.00	5.68	26.14	36.00
HT20	2	5785	23.21	22.35	--	--	25.81	30.00	5.68	31.49	36.00
HT20	2	5825	18.06	16.95	--	--	20.55	30.00	5.68	26.23	36.00
HT40	2	5755	14.69	13.64	--	--	17.21	30.00	5.68	22.89	36.00
HT40	2	5795	20.34	19.51	--	--	22.96	30.00	5.68	28.64	36.00
VHT20	2	5745	17.98	17.04	--	--	20.55	30.00	5.68	26.23	36.00
VHT20	2	5785	23.35	22.46	--	--	25.94	30.00	5.68	31.62	36.00
VHT20	2	5825	18.14	17.01	--	--	20.62	30.00	5.68	26.30	36.00
VHT40	2	5755	14.81	13.76	--	--	17.33	30.00	5.68	23.01	36.00
VHT40	2	5795	20.42	19.63	--	--	23.05	30.00	5.68	28.73	36.00
VHT80	2	5775	13.21	12.28	--	--	15.78	30.00	5.68	21.46	36.00
Result			Complied								

Mode 2: External antenna with adapter mode

Maximum Conducted (Average) Output Power											
Condition			RF Output Power (dBm)								
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	Chain Port 3	Chain Port 4	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit
11a	2	5745	18.04	18.86	--	--	21.48	30.00	2.95	24.43	36.00
11a	2	5785	22.56	22.91	--	--	25.75	30.00	2.95	28.70	36.00
11a	2	5825	18.82	19.75	--	--	22.32	30.00	2.95	25.27	36.00
HT20	2	5745	17.65	18.31	--	--	21.00	30.00	2.95	23.95	36.00
HT20	2	5785	22.45	22.86	--	--	25.67	30.00	2.95	28.62	36.00
HT20	2	5825	18.24	19.17	--	--	21.74	30.00	2.95	24.69	36.00
HT40	2	5755	14.92	15.45	--	--	18.20	30.00	2.95	21.15	36.00
HT40	2	5795	20.36	20.64	--	--	23.51	30.00	2.95	26.46	36.00
VHT20	2	5745	17.72	18.39	--	--	21.08	30.00	2.95	24.03	36.00
VHT20	2	5785	22.54	22.95	--	--	25.76	30.00	2.95	28.71	36.00
VHT20	2	5825	18.36	19.28	--	--	21.85	30.00	2.95	24.80	36.00
VHT40	2	5755	15.01	15.56	--	--	18.30	30.00	2.95	21.25	36.00
VHT40	2	5795	20.45	20.76	--	--	23.62	30.00	2.95	26.57	36.00
VHT80	2	5775	12.84	13.54	--	--	16.21	30.00	2.95	19.16	36.00
Result			Complied								

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit
The maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
☒	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
☐	Refer as 789033 D02 General UNII Test Procedures New Rules v01, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☐	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 (spectral trace averaging).
☐	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
☐	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 (spectral trace averaging).
☒	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.
☐	The EUT supports single transmit chain and measurements performed on this transmit chain.
☐	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
☒	The EUT supports multiple transmit chains using options given below:
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
☐	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
☐	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
☐	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.


3.4.4 Test Setup

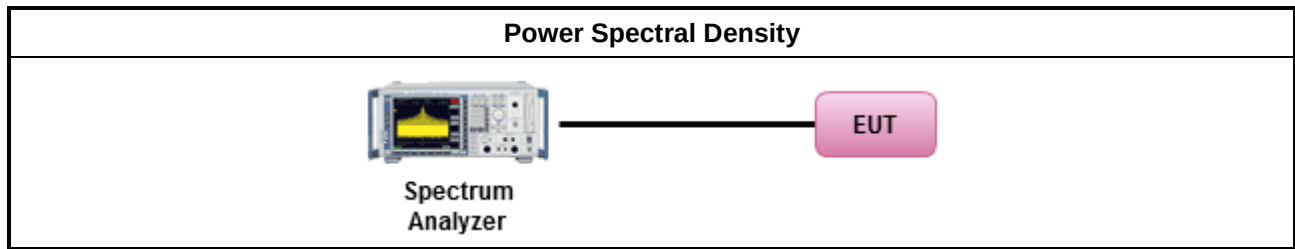

3.4.5 Test Result of Peak Power Spectral Density

Mode 1: Internal antenna with adapter mode

Peak Power Spectral Density Result							
Condition			Peak Power Spectral Density (dBm/500kHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	2	5745	6.48	27.53	8.47	14.95	36.00
11a	2	5785	11.42	27.53	8.47	19.89	36.00
11a	2	5825	6.32	27.53	8.47	14.79	36.00
VHT20	2	5745	5.80	27.53	8.47	14.27	36.00
VHT20	2	5785	10.98	27.53	8.47	19.45	36.00
VHT20	2	5825	5.78	27.53	8.47	14.25	36.00
VHT40	2	5755	-0.58	27.53	8.47	7.89	36.00
VHT40	2	5795	5.31	27.53	8.47	13.78	36.00
VHT80	2	5775	-4.77	27.53	8.47	3.70	36.00
Result			Complied				

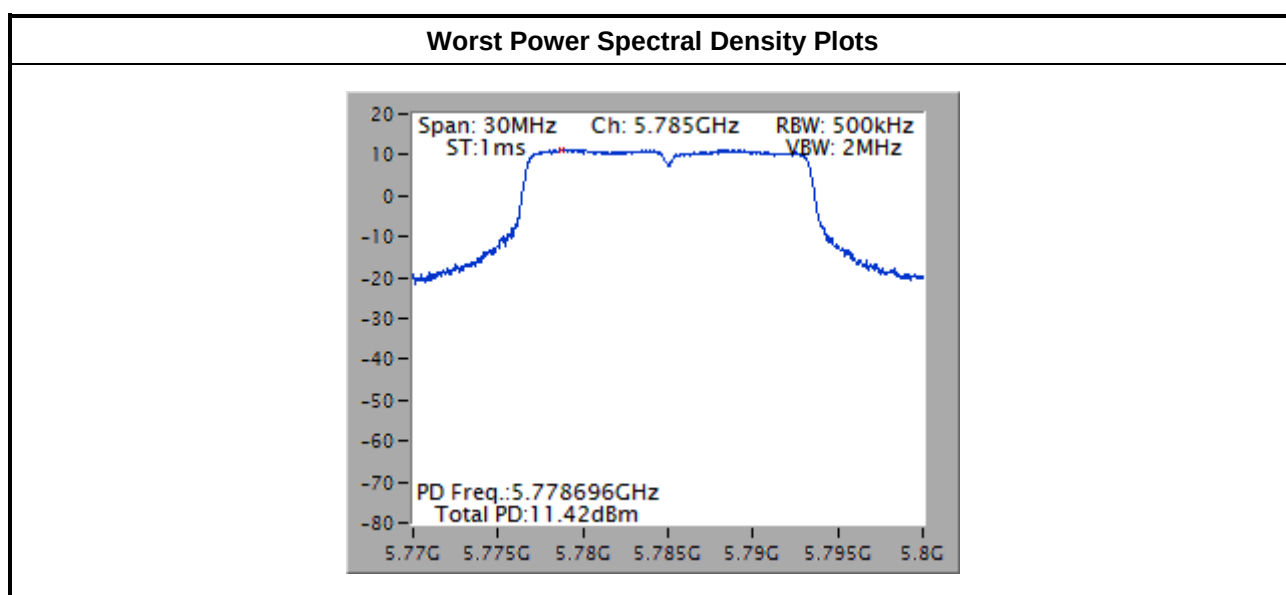


Note:

- Test results are bin-by-bin summing measured value of each TX port.
 $\text{Directional gain} = 10 * \log((10^{5.23/20} + 10^{5.68/20})/2) = 8.47 \text{ dBi} > 6 \text{ dBi}$
 Limit shall be reduced to $30 \text{ dBm} - (8.47 \text{ dBi} - 6 \text{ dBi}) = 27.53 \text{ dBm}$

Mode 2: External antenna with adapter mode

Peak Power Spectral Density Result							
Condition			Peak Power Spectral Density (dBm/500kHz)				
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	PSD Limit	DG (dBi)	EIRP PSD	EIRP Limit
11a	2	5745	6.69	30.00	5.96	12.65	36.00
11a	2	5785	11.27	30.00	5.96	17.23	36.00
11a	2	5825	7.68	30.00	5.96	13.64	36.00
VHT20	2	5745	5.93	30.00	5.96	11.89	36.00
VHT20	2	5785	10.85	30.00	5.96	16.81	36.00
VHT20	2	5825	7.15	30.00	5.96	13.11	36.00
VHT40	2	5755	0.35	30.00	5.96	6.31	36.00
VHT40	2	5795	5.28	30.00	5.96	11.24	36.00
VHT80	2	5775	-4.49	30.00	5.96	1.47	36.00
Result			Complied				

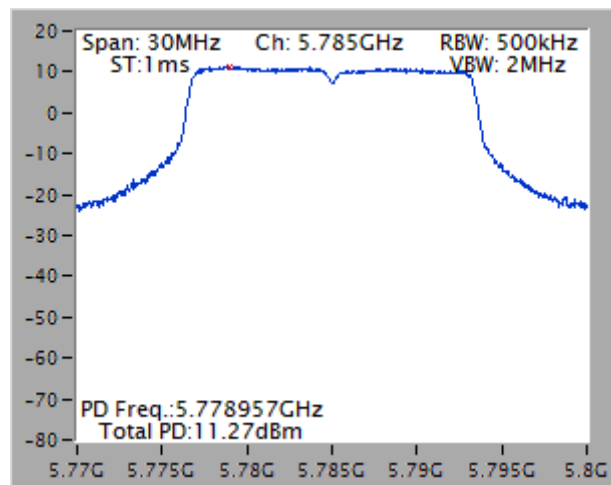Worst Power Spectral Density Plots


3.5 Transmitter Radiated Unwanted Emissions and Band Edge

3.5.1 Transmitter Radiated Unwanted Emissions and Band Edge Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.715~ 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 ~5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)2) for unwanted emissions into non-restricted bands.
☒	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)1) for unwanted emissions into restricted bands.
☐	Refer as 789033 D02 General UNII Test Procedures New Rules v01, G)6) Method AD (Trace Averaging).
☐	Refer as 789033 D02 General UNII Test Procedures New Rules v01, G)6) Method VB (Reduced VBW).
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq 1/T$, where T is pulse time.
☐	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
☒	Refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)5) measurement procedure peak limit.
☐	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.
☐	For conducted and cabinet radiation measurement, refer as 789033 D02 General UNII Test Procedures New Rules v01, clause G)3).
☐	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
☐	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
☐	For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

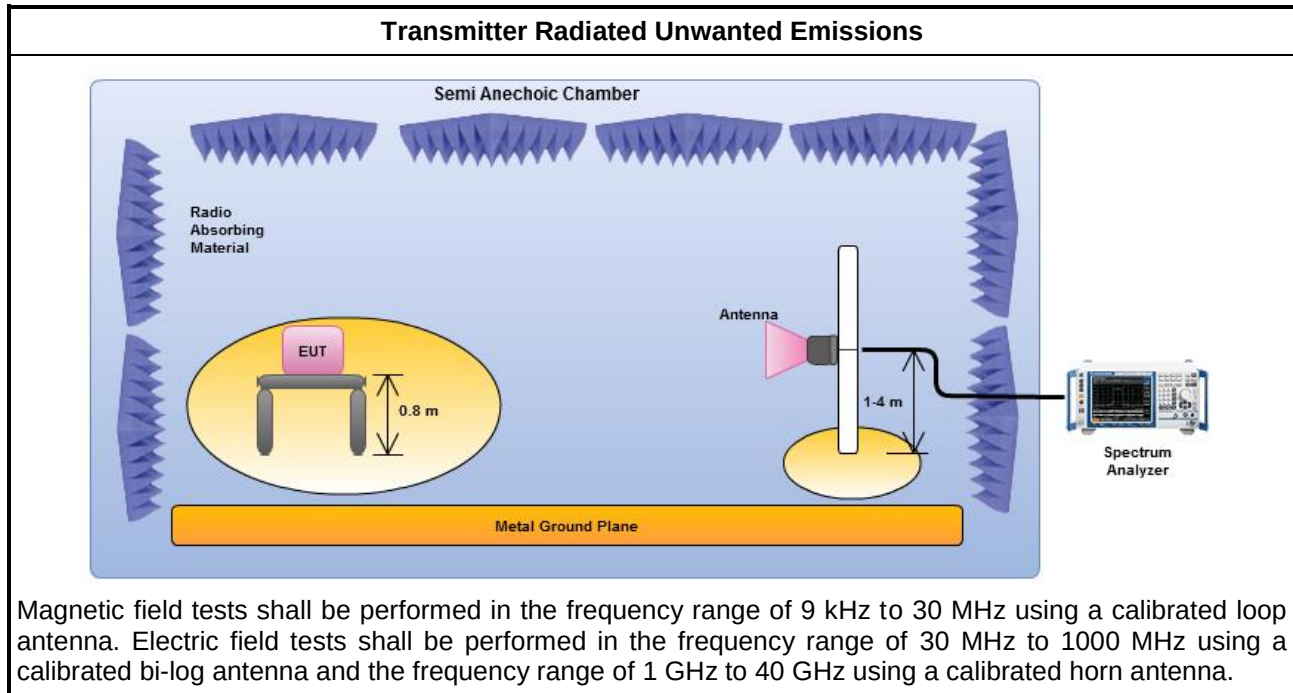


Note: Test distance is 3m.

3.5.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Mode 1: Internal antenna with adapter mode

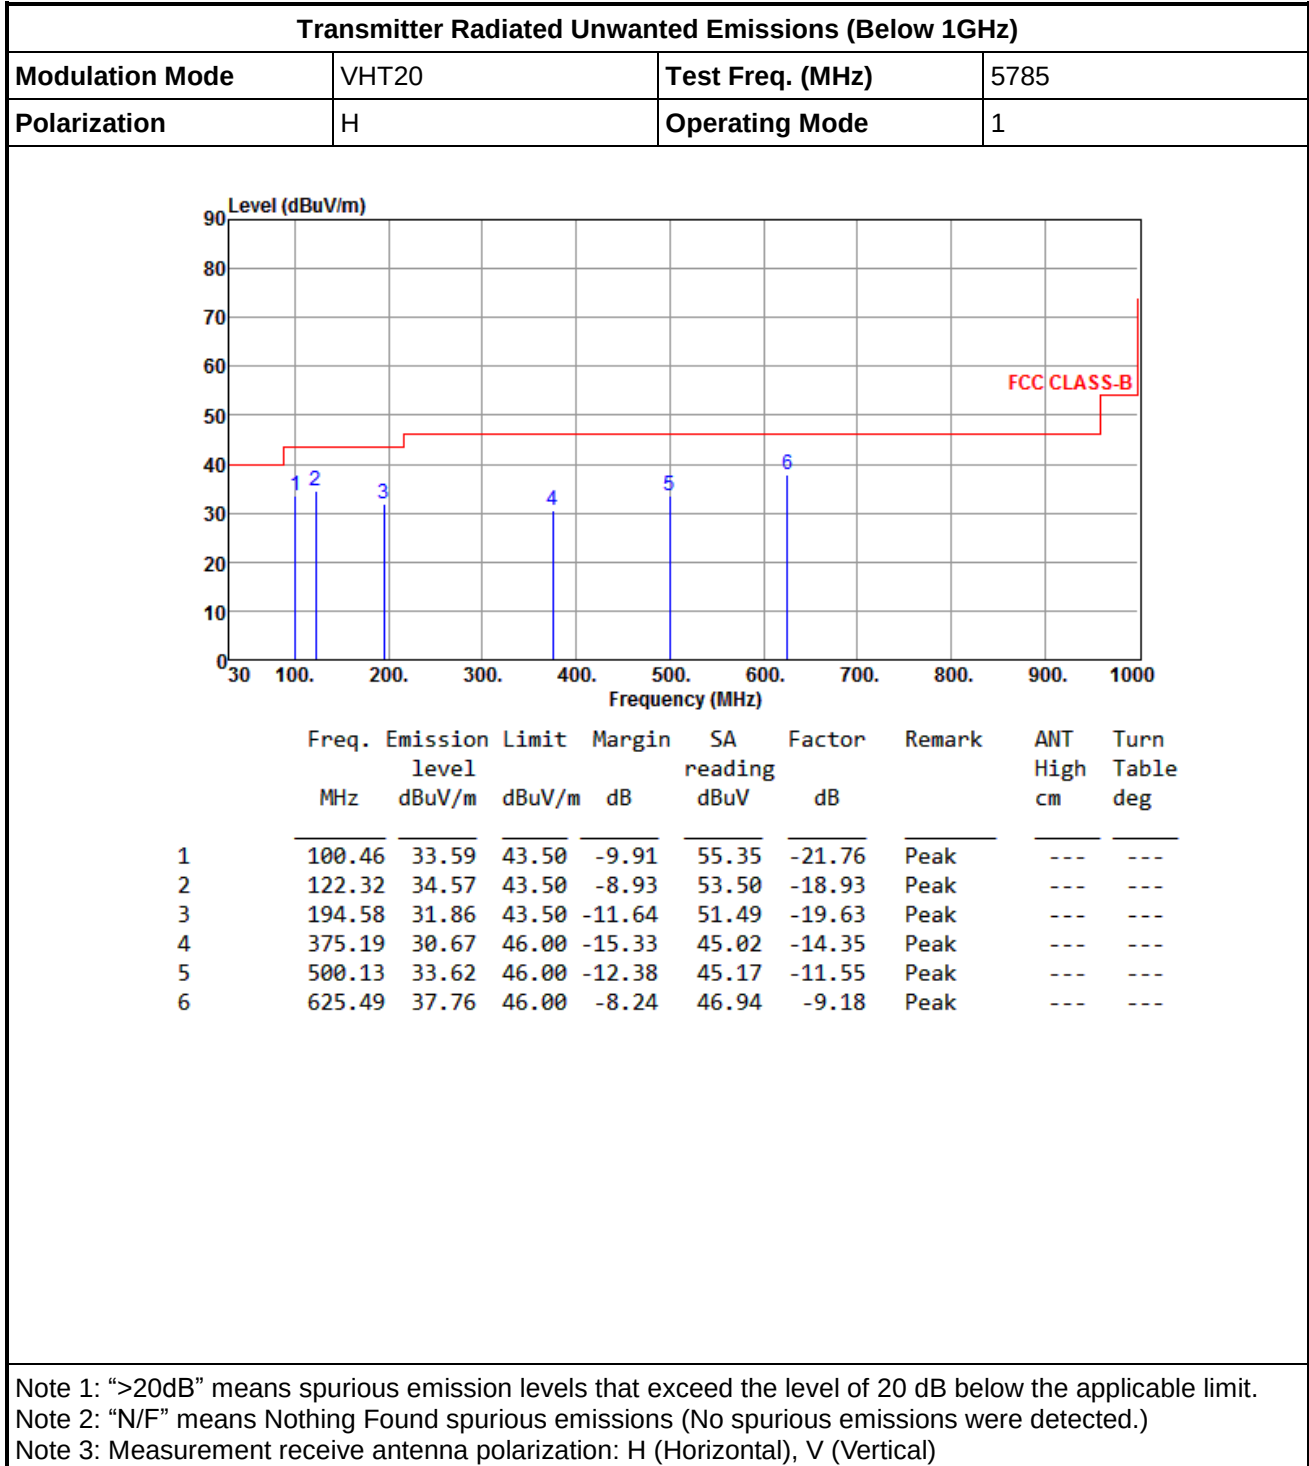

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
Polarization	V	Operating Mode	1

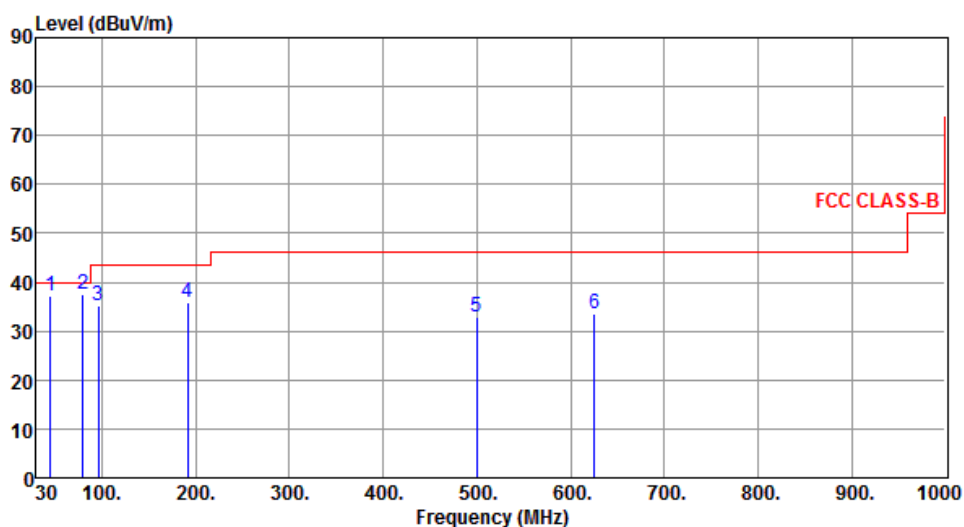


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	44.63	37.13	40.00	-2.87	53.94	-16.81	Peak	---	---
2	79.51	37.68	40.00	-2.32	59.21	-21.53	Peak	---	---
3	96.36	35.28	43.50	-8.22	57.56	-22.28	Peak	---	---
4	191.43	35.72	43.50	-7.78	55.32	-19.60	Peak	---	---
5	500.19	32.87	46.00	-13.13	44.42	-11.55	Peak	---	---
6	625.47	33.68	46.00	-12.32	42.86	-9.18	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

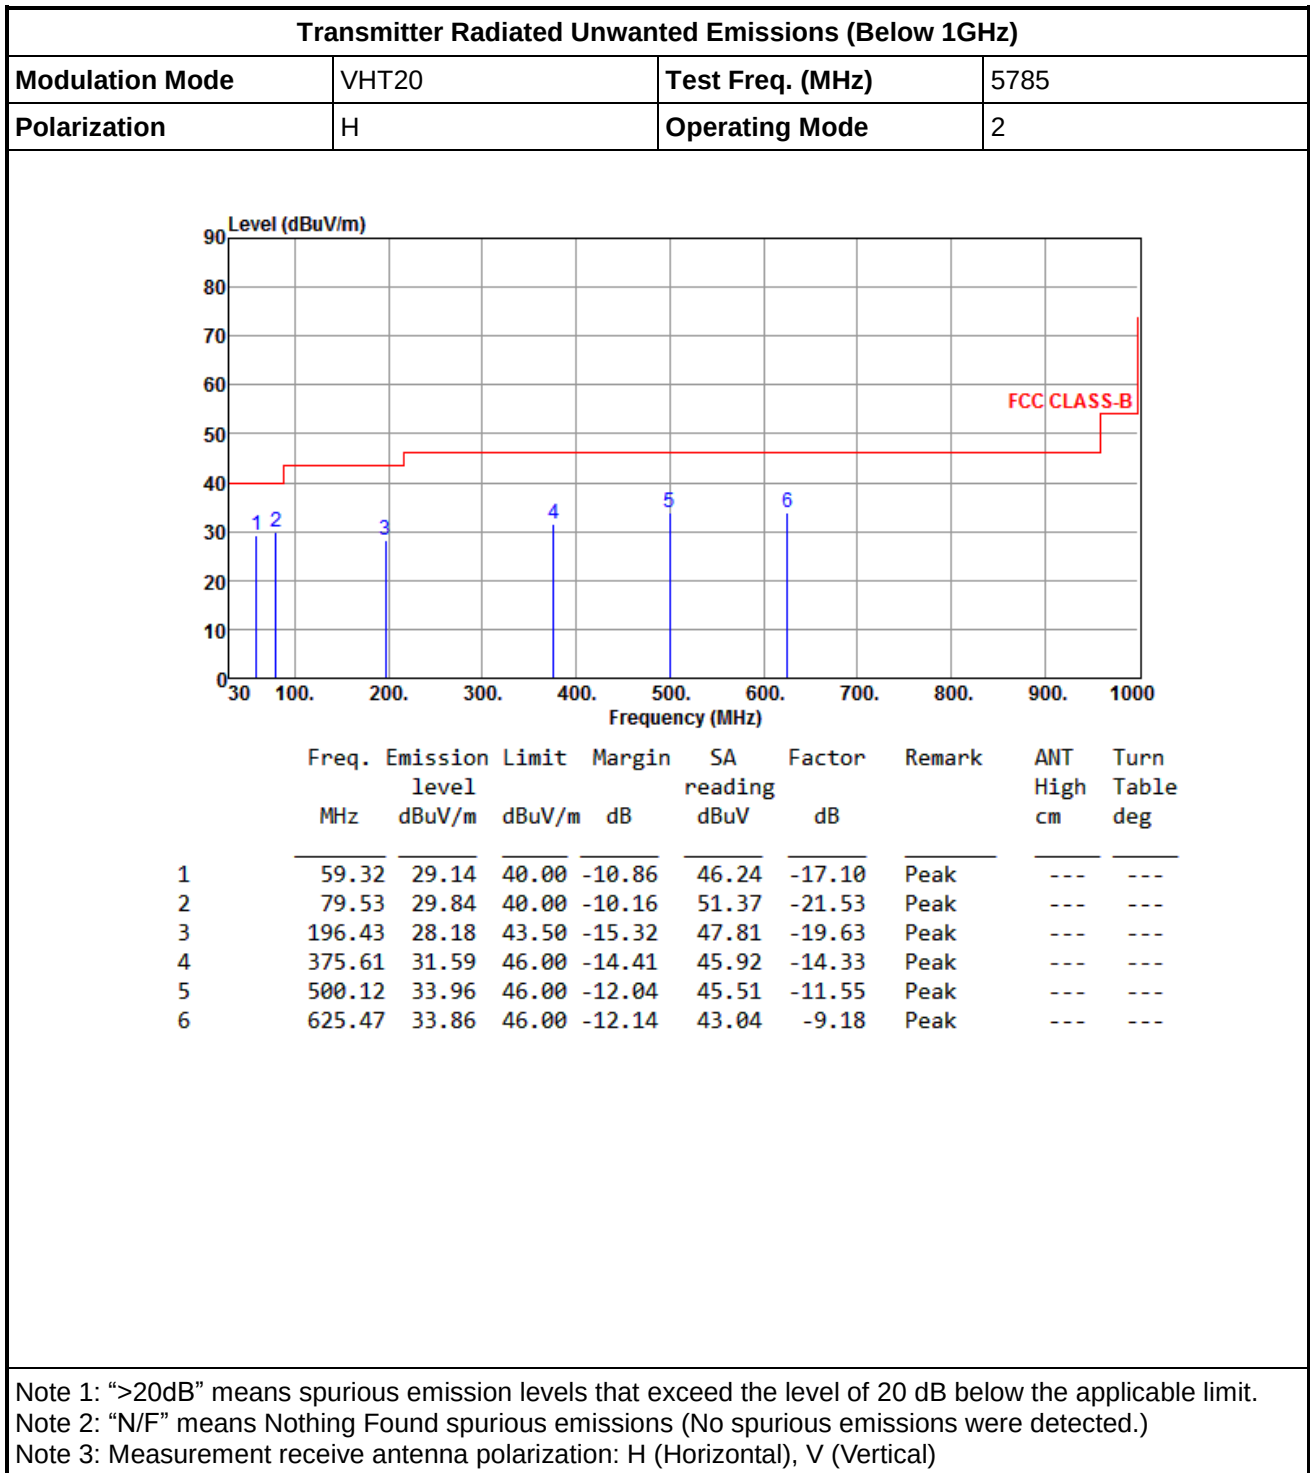Mode 2: Internal antenna with POE mode


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
Polarization	V	Operating Mode	2

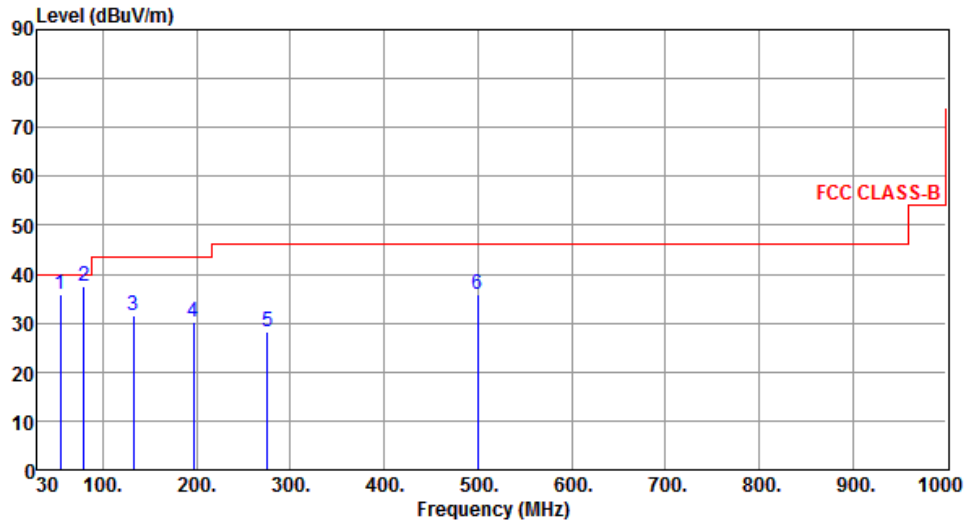

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.36	36.02	40.00	-3.98	52.83	-16.81	QP	---	---
2	79.63	37.56	40.00	-2.44	59.11	-21.55	Peak	---	---
3	132.47	31.56	43.50	-11.94	49.60	-18.04	Peak	---	---
4	196.65	30.18	43.50	-13.32	49.82	-19.64	Peak	---	---
5	275.64	28.13	46.00	-17.87	44.99	-16.86	Peak	---	---
6	500.11	35.87	46.00	-10.13	47.42	-11.55	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Mode 3: External antenna with adapter mode

Transmitter Radiated Unwanted Emissions (Below 1GHz)									
Modulation Mode		VHT20			Test Freq. (MHz)		5785		
Polarization		H			Operating Mode		3		
Level (dBuV/m) <									

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
Polarization	V	Operating Mode	3

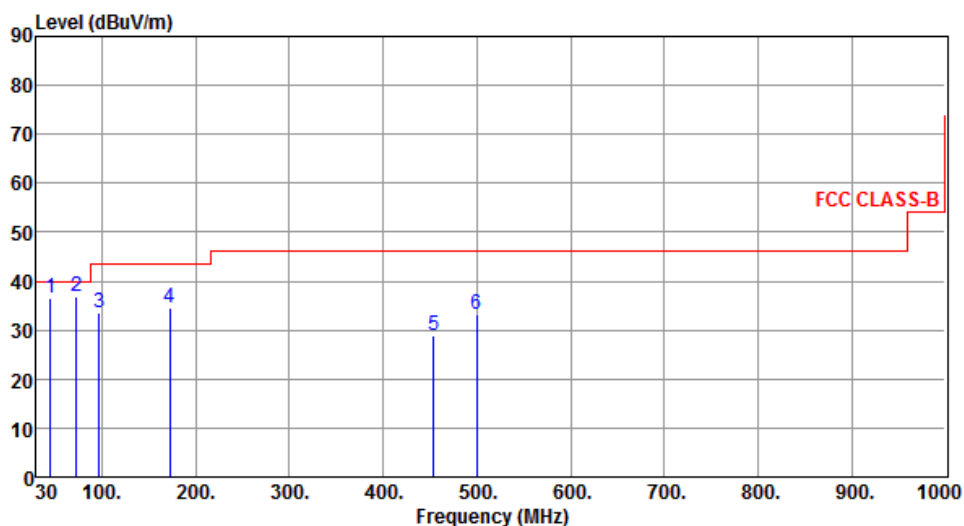


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	45.27	36.43	40.00	-3.57	53.21	-16.78	Peak	---	---
2	72.53	36.94	40.00	-3.06	56.92	-19.98	Peak	---	---
3	96.67	33.48	43.50	-10.02	55.72	-22.24	Peak	---	---
4	172.41	34.56	43.50	-8.94	52.27	-17.71	Peak	---	---
5	453.64	28.96	46.00	-17.04	41.41	-12.45	Peak	---	---
6	500.18	33.13	46.00	-12.87	44.68	-11.55	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

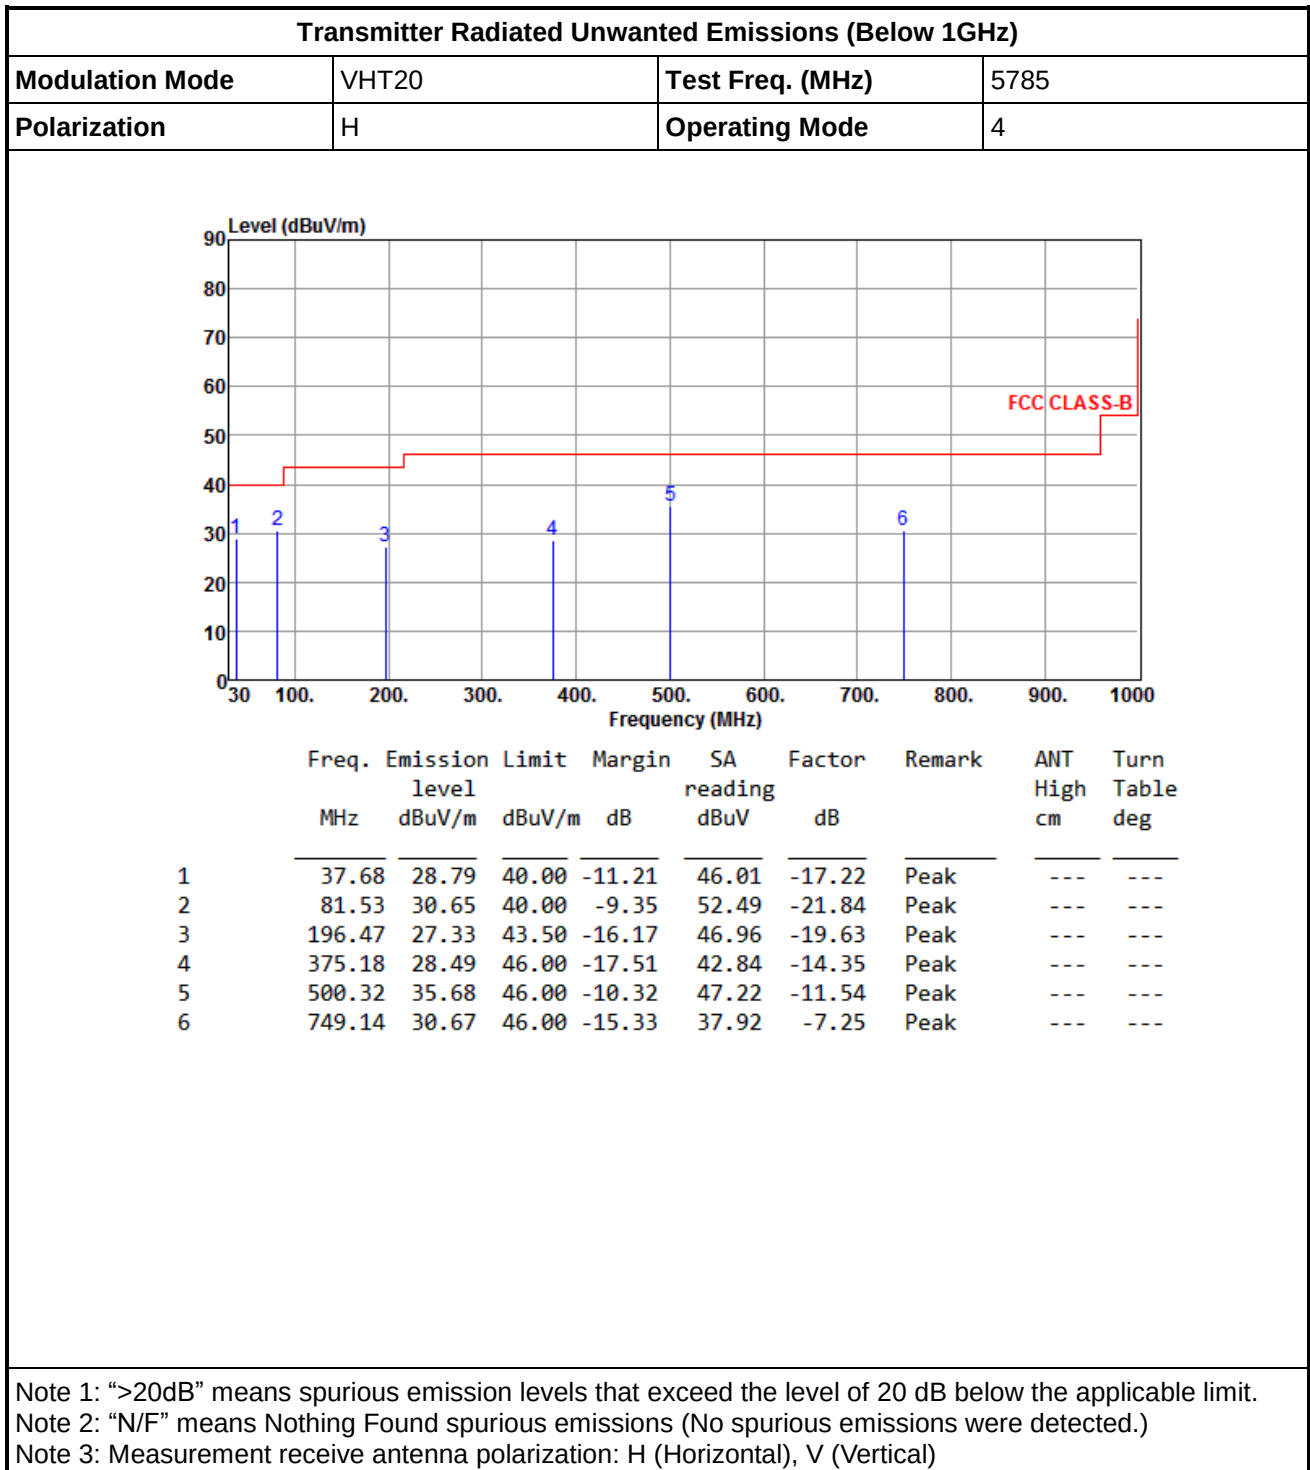Mode 4: External antenna with POE mode


Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
Polarization	V	Operating Mode	4

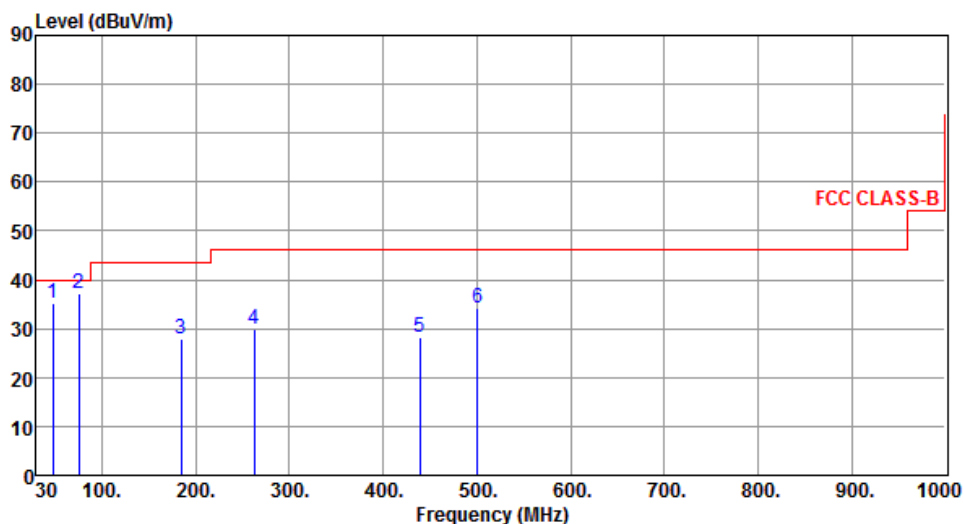

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	47.34	35.13	40.00	-4.87	51.79	-16.66	Peak	---	---
2	74.99	37.28	40.00	-2.72	57.83	-20.55	Peak	---	---
3	184.76	27.76	43.50	-15.74	46.78	-19.02	Peak	---	---
4	262.63	29.85	46.00	-16.15	47.32	-17.47	Peak	---	---
5	439.18	28.31	46.00	-17.69	41.08	-12.77	Peak	---	---
6	500.37	34.24	46.00	-11.76	45.78	-11.54	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Mode 1: Internal antenna with adapter mode

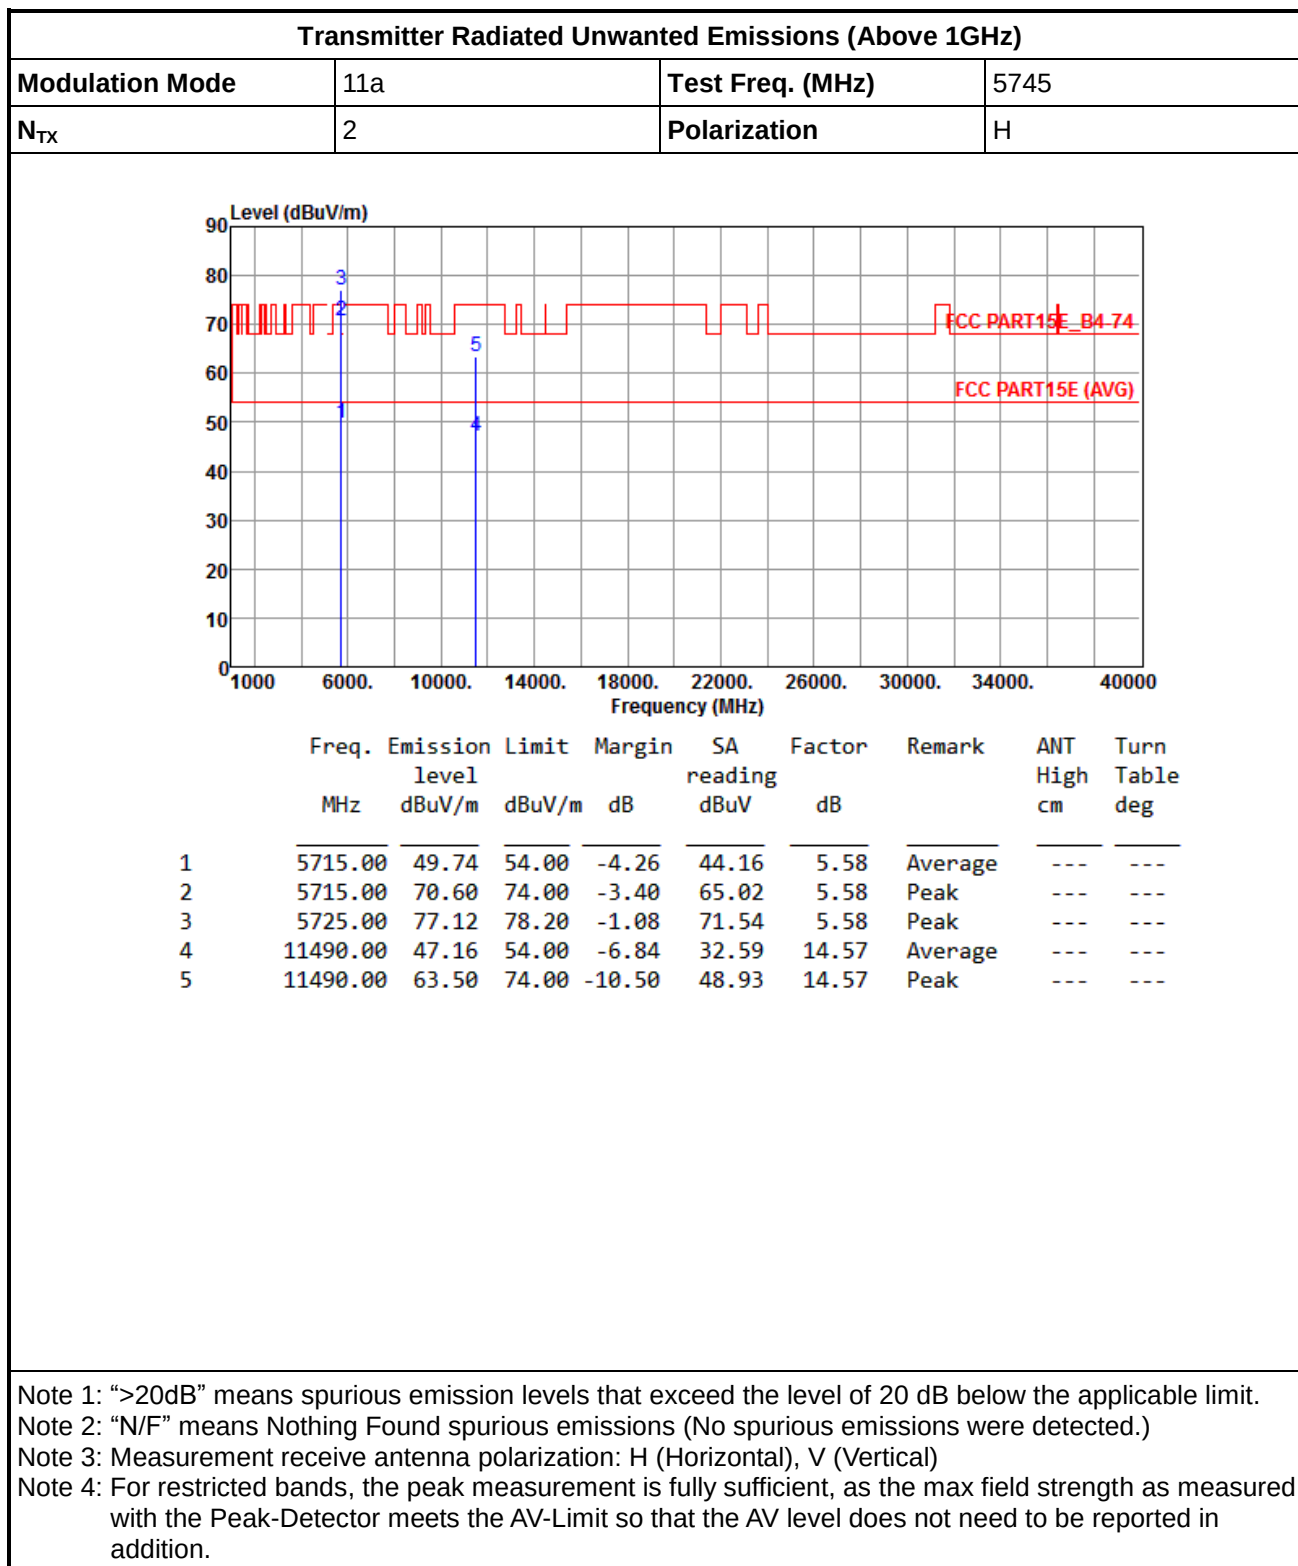

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

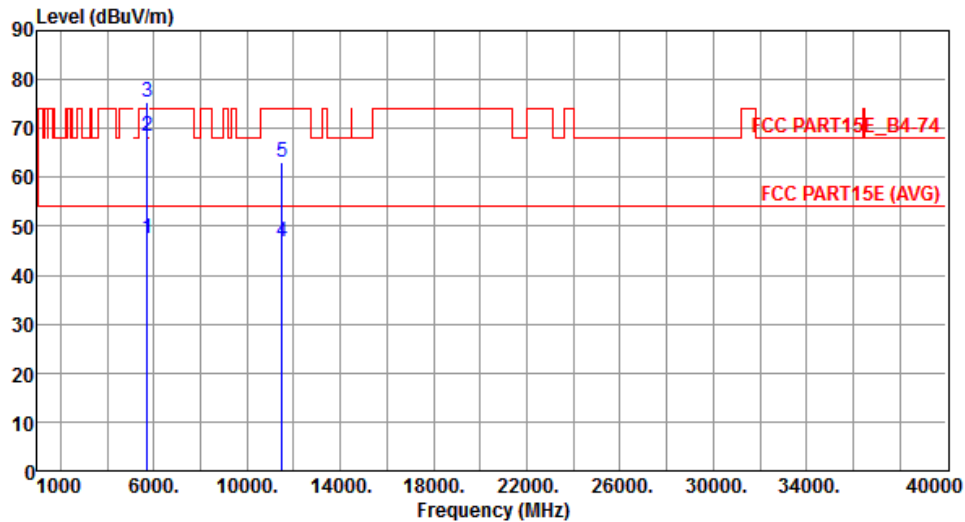

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	47.53	54.00	-6.47	41.95	5.58	Average	---	---
2	5715.00	68.37	74.00	-5.63	62.79	5.58	Peak	---	---
3	5725.00	75.42	78.20	-2.78	69.84	5.58	Peak	---	---
4	11490.00	46.72	54.00	-7.28	32.15	14.57	Average	---	---
5	11490.00	62.97	74.00	-11.03	48.40	14.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N_{TX}	2	Polarization	H

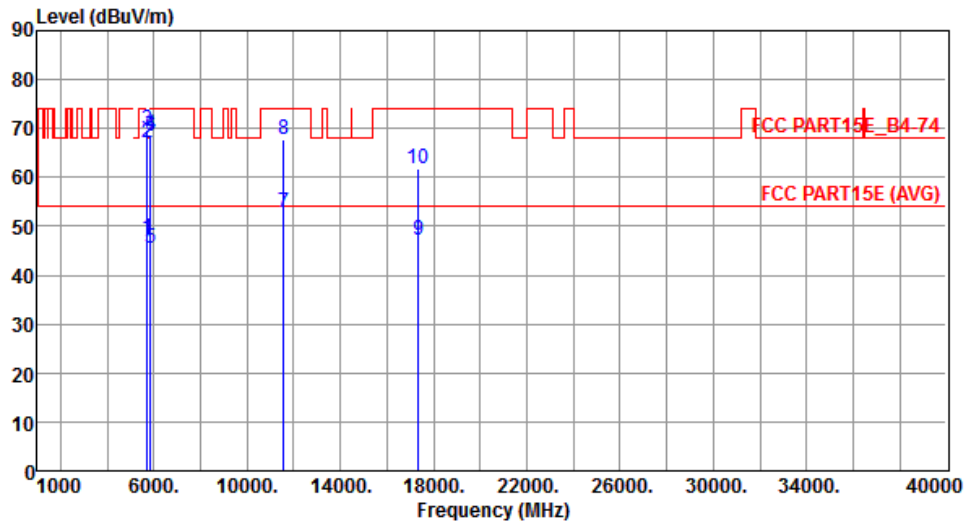

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	47.45	54.00	-6.55	41.87	5.58	Average	---	---
2	5715.00	67.24	74.00	-6.76	61.66	5.58	Peak	---	---
3	5725.00	69.64	78.20	-8.56	64.06	5.58	Peak	---	---
4	5850.00	68.87	78.20	-9.33	63.25	5.62	Peak	---	---
5	5860.00	45.35	54.00	-8.65	39.73	5.62	Average	---	---
6	5860.00	68.40	74.00	-5.60	62.78	5.62	Peak	---	---
7	11570.00	52.75	54.00	-1.25	38.26	14.49	Average	---	---
8	11570.00	67.90	74.00	-6.10	53.41	14.49	Peak	---	---
9	17355.00	47.15	54.00	-6.85	28.40	18.75	Average	---	---
10	17355.00	61.71	74.00	-12.29	42.96	18.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	V

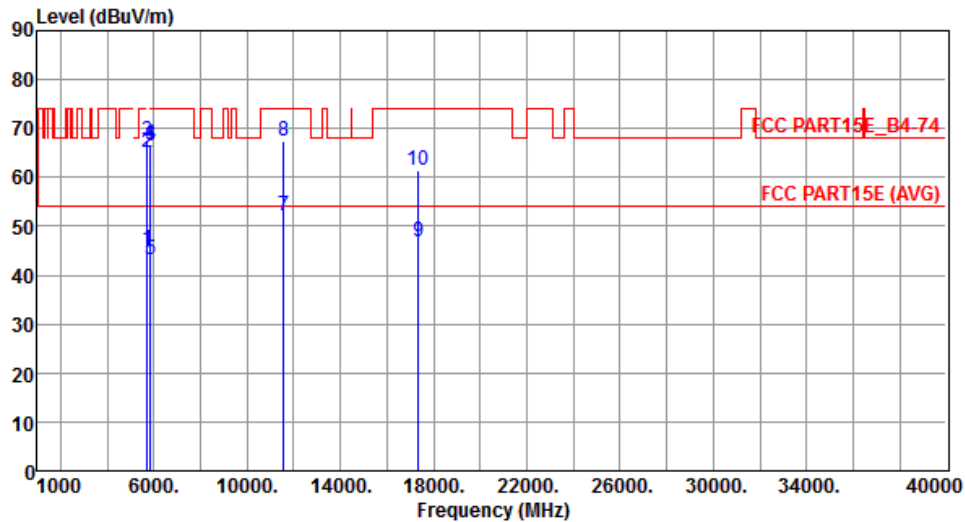


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	45.33	54.00	-8.67	39.75	5.58	Average	---	---
2	5715.00	65.12	74.00	-8.88	59.54	5.58	Peak	---	---
3	5725.00	67.48	78.20	-10.72	61.90	5.58	Peak	---	---
4	5850.00	66.84	78.20	-11.36	61.22	5.62	Peak	---	---
5	5860.00	43.15	54.00	-10.85	37.53	5.62	Average	---	---
6	5860.00	66.36	74.00	-7.64	60.74	5.62	Peak	---	---
7	11570.00	52.23	54.00	-1.77	37.74	14.49	Average	---	---
8	11570.00	67.29	74.00	-6.71	52.80	14.49	Peak	---	---
9	17355.00	46.88	54.00	-7.12	28.13	18.75	Average	---	---
10	17355.00	61.35	74.00	-12.65	42.60	18.75	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

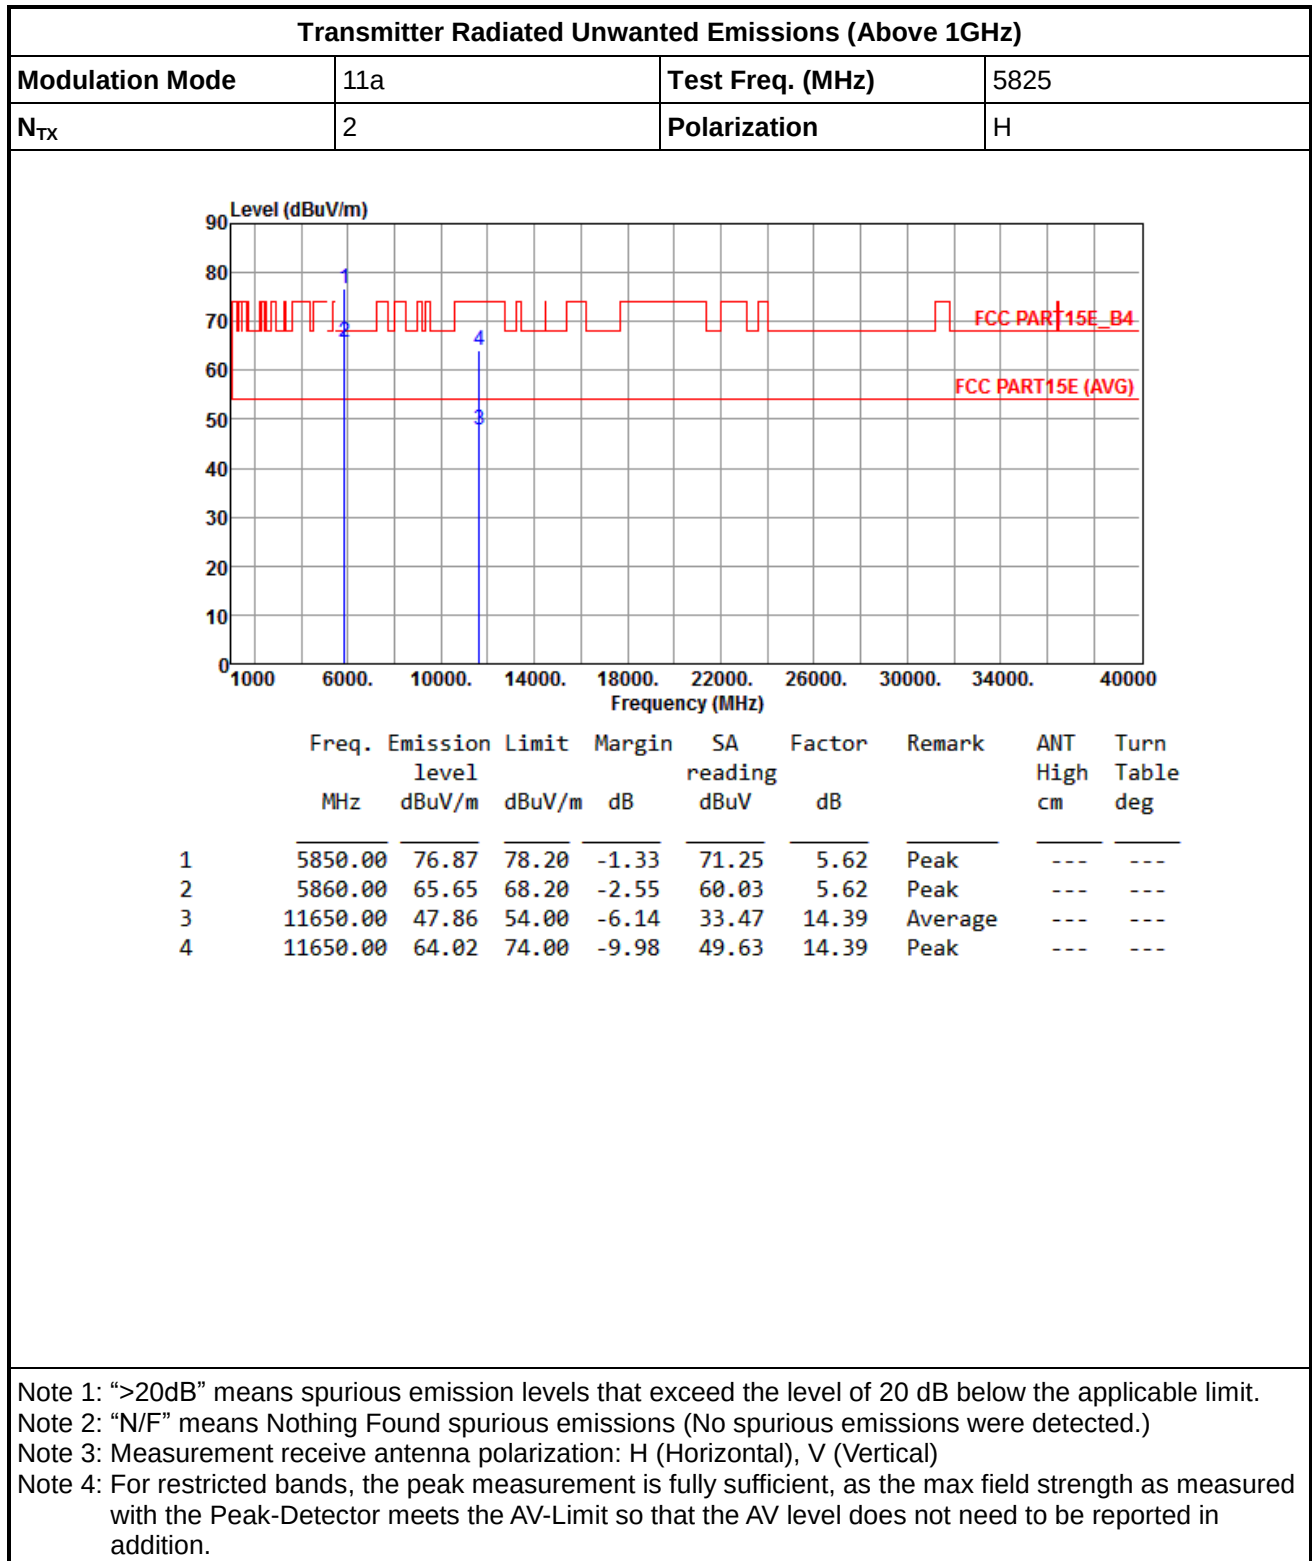

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N_{TX}	2	Polarization	V

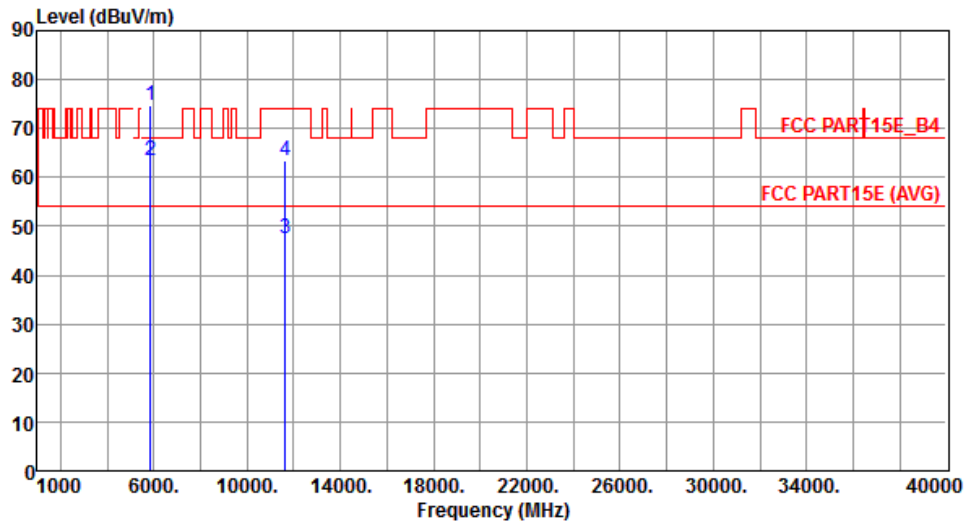

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	74.84	78.20	-3.36	69.22	5.62	Peak	---	---
2	5860.00	63.56	68.20	-4.64	57.94	5.62	Peak	---	---
3	11650.00	47.33	54.00	-6.67	32.94	14.39	Average	---	---
4	11650.00	63.42	74.00	-10.58	49.03	14.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	H

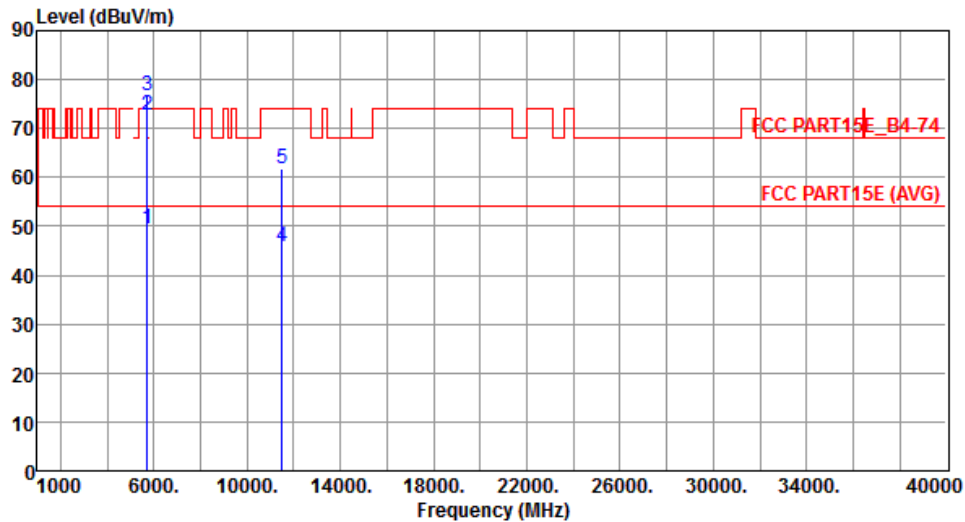

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	49.50	54.00	-4.50	43.92	5.58	Average	---	---
2	5715.00	72.87	74.00	-1.13	67.29	5.58	Peak	---	---
3	5725.00	76.86	78.20	-1.34	71.28	5.58	Peak	---	---
4	11490.00	45.99	54.00	-8.01	31.42	14.57	Average	---	---
5	11490.00	61.68	74.00	-12.32	47.11	14.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

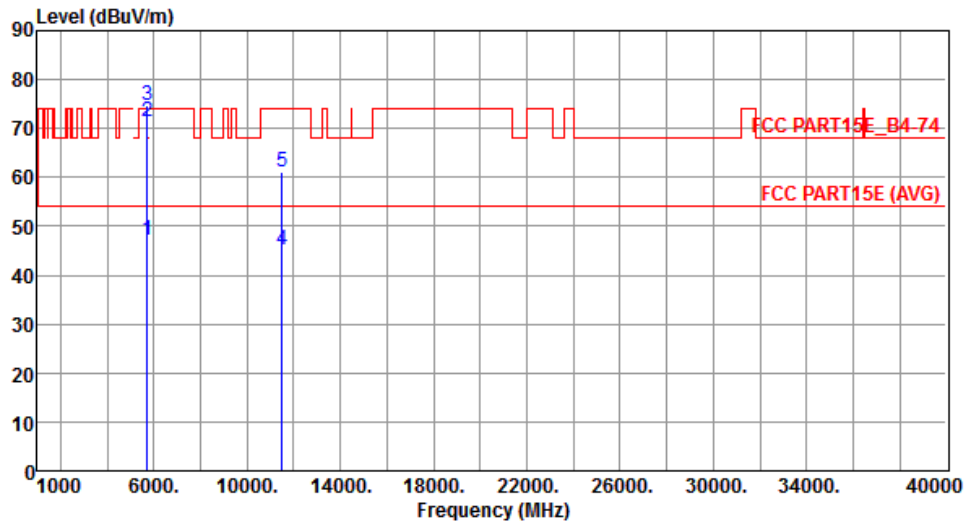

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	47.25	54.00	-6.75	41.67	5.58	Average	---	---
2	5715.00	71.28	74.00	-2.72	65.70	5.58	Peak	---	---
3	5725.00	74.57	78.20	-3.63	68.99	5.58	Peak	---	---
4	11490.00	45.22	54.00	-8.78	30.65	14.57	Average	---	---
5	11490.00	61.13	74.00	-12.87	46.56	14.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	H

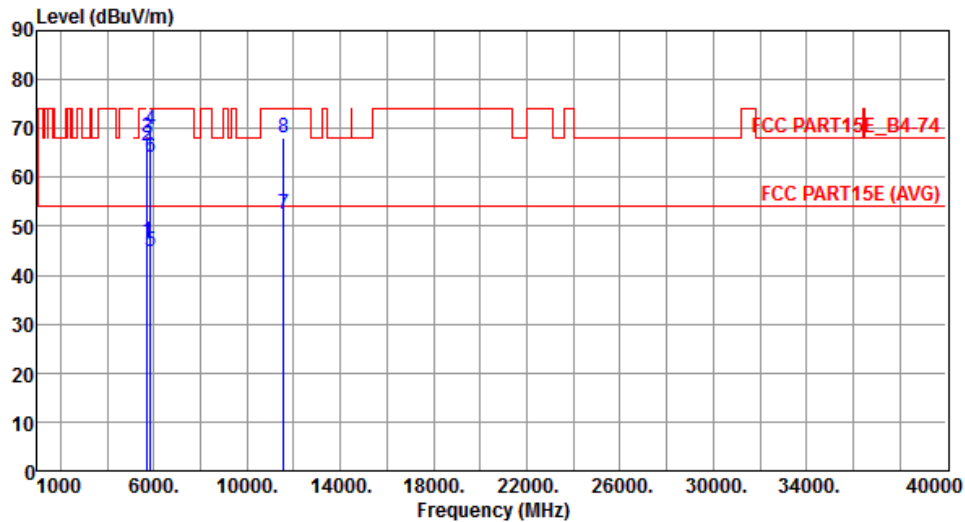

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	46.97	54.00	-7.03	41.39	5.58	Average	---	---
2	5715.00	66.53	74.00	-7.47	60.95	5.58	Peak	---	---
3	5725.00	68.01	78.20	-10.19	62.43	5.58	Peak	---	---
4	5850.00	69.83	78.20	-8.37	64.21	5.62	Peak	---	---
5	5860.00	44.86	54.00	-9.14	39.24	5.62	Average	---	---
6	5860.00	64.12	74.00	-9.88	58.50	5.62	Peak	---	---
7	11570.00	52.55	54.00	-1.45	38.06	14.49	Average	---	---
8	11570.00	68.20	74.00	-5.80	53.71	14.49	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	V

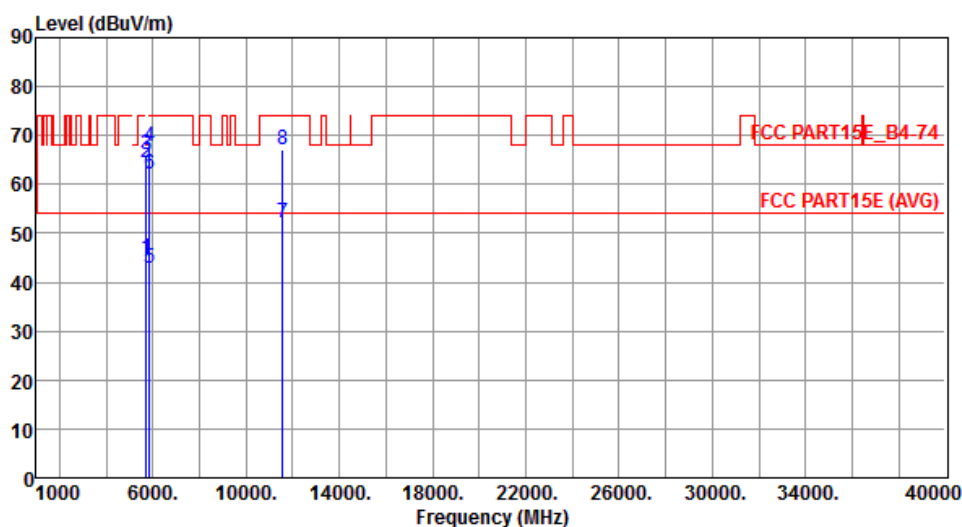

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	44.93	54.00	-9.07	39.35	5.58	Average	---	---
2	5715.00	64.48	74.00	-9.52	58.90	5.58	Peak	---	---
3	5725.00	66.15	78.20	-12.05	60.57	5.58	Peak	---	---
4	5850.00	67.73	78.20	-10.47	62.11	5.62	Peak	---	---
5	5860.00	42.69	54.00	-11.31	37.07	5.62	Average	---	---
6	5860.00	62.08	74.00	-11.92	56.46	5.62	Peak	---	---
7	11570.00	52.08	54.00	-1.92	37.59	14.49	Average	---	---
8	11570.00	67.11	74.00	-6.89	52.62	14.49	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	H

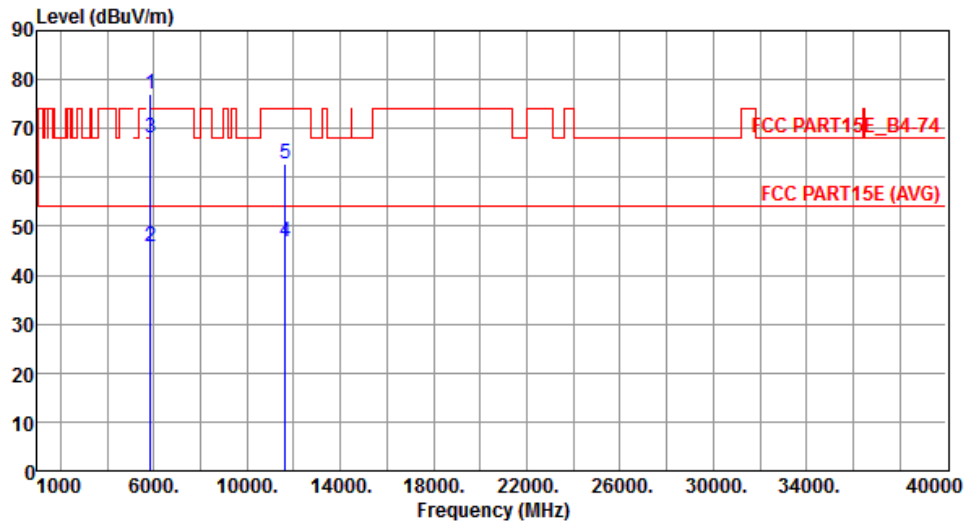

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	77.08	78.20	-1.12	71.46	5.62	Peak	---	---
2	5860.00	45.79	54.00	-8.21	40.17	5.62	Average	---	---
3	5860.00	68.20	74.00	-5.80	62.58	5.62	Peak	---	---
4	11650.00	46.68	54.00	-7.32	32.29	14.39	Average	---	---
5	11650.00	62.93	74.00	-11.07	48.54	14.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	V

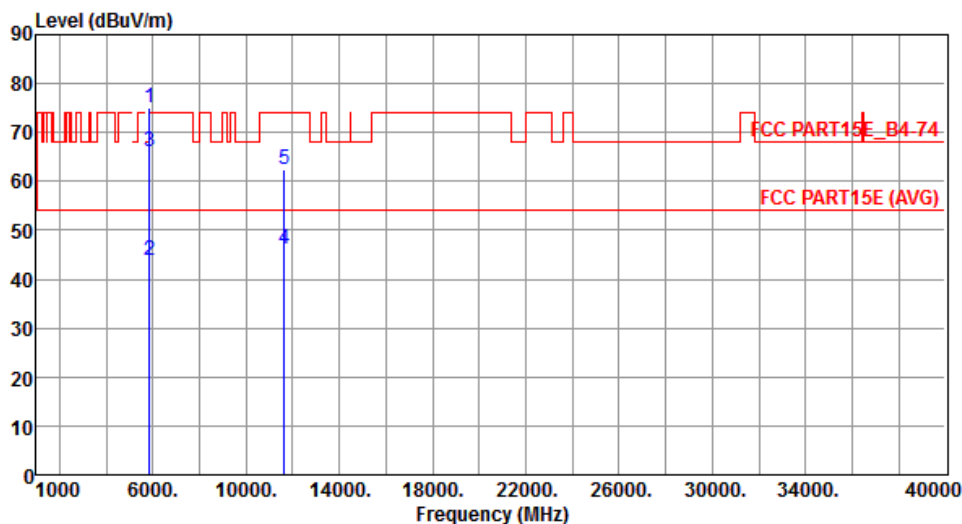

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	75.03	78.20	-3.17	69.41	5.62	Peak	---	---
2	5860.00	43.71	54.00	-10.29	38.09	5.62	Average	---	---
3	5860.00	66.06	74.00	-7.94	60.44	5.62	Peak	---	---
4	11650.00	46.24	54.00	-7.76	31.85	14.39	Average	---	---
5	11650.00	62.34	74.00	-11.66	47.95	14.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	2	Polarization	H

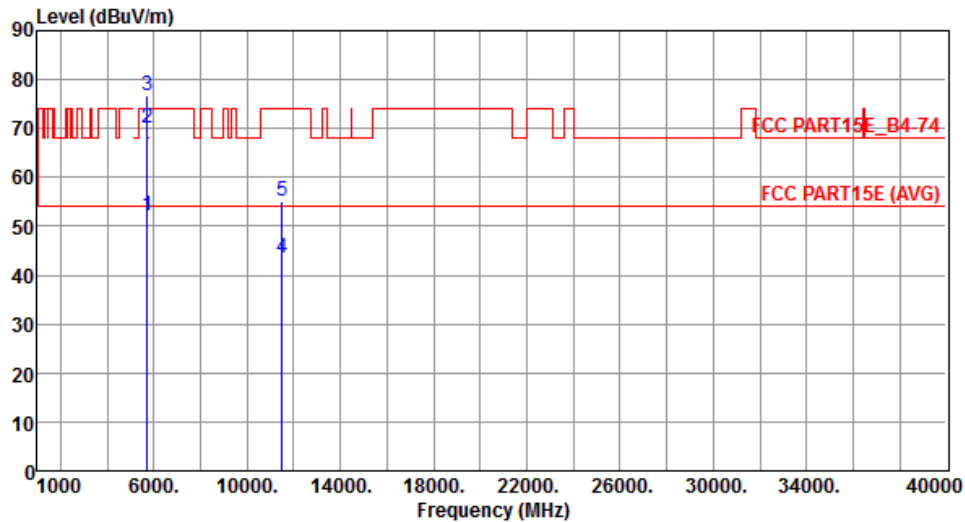

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.16	54.00	-1.84	46.58	5.58	Average	---	---
2	5715.00	70.23	74.00	-3.77	64.65	5.58	Peak	---	---
3	5725.00	76.83	78.20	-1.37	71.25	5.58	Peak	---	---
4	11510.00	43.57	54.00	-10.43	29.02	14.55	Average	---	---
5	11510.00	55.29	74.00	-18.71	40.74	14.55	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	2	Polarization	V

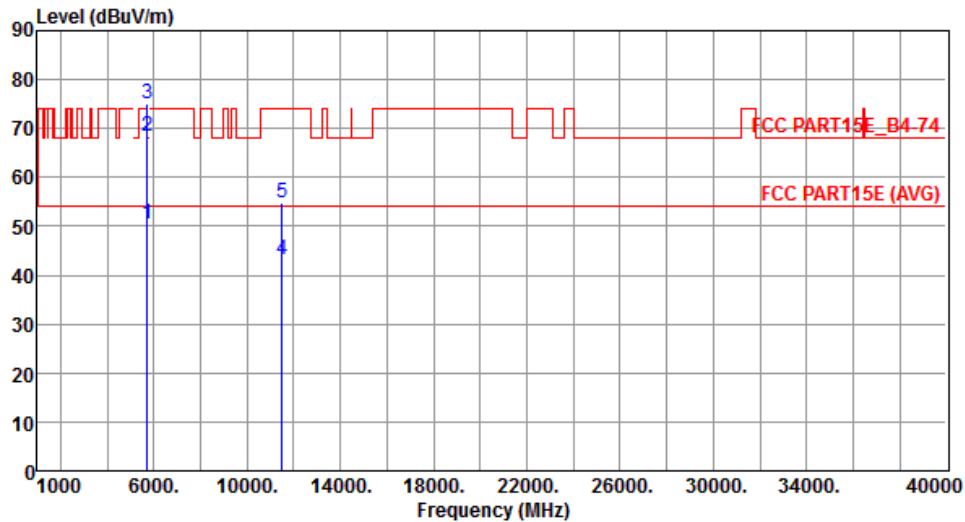

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	50.37	54.00	-3.63	44.79	5.58	Average	---	---
2	5715.00	68.55	74.00	-5.45	62.97	5.58	Peak	---	---
3	5725.00	74.96	78.20	-3.24	69.38	5.58	Peak	---	---
4	11510.00	43.11	54.00	-10.89	28.56	14.55	Average	---	---
5	11510.00	54.86	74.00	-19.14	40.31	14.55	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N _{TX}	2	Polarization	H

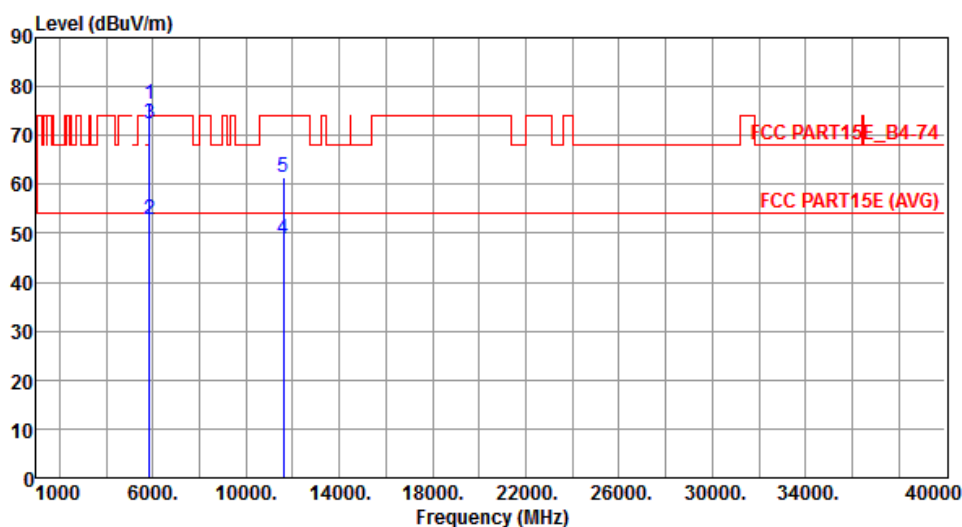


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	76.52	78.20	-1.68	70.90	5.62	Peak	---	---
2	5860.00	52.84	54.00	-1.16	47.22	5.62	Average	---	---
3	5860.00	72.50	74.00	-1.50	66.88	5.62	Peak	---	---
4	11590.00	48.77	54.00	-5.23	34.32	14.45	Average	---	---
5	11590.00	61.60	74.00	-12.40	47.15	14.45	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

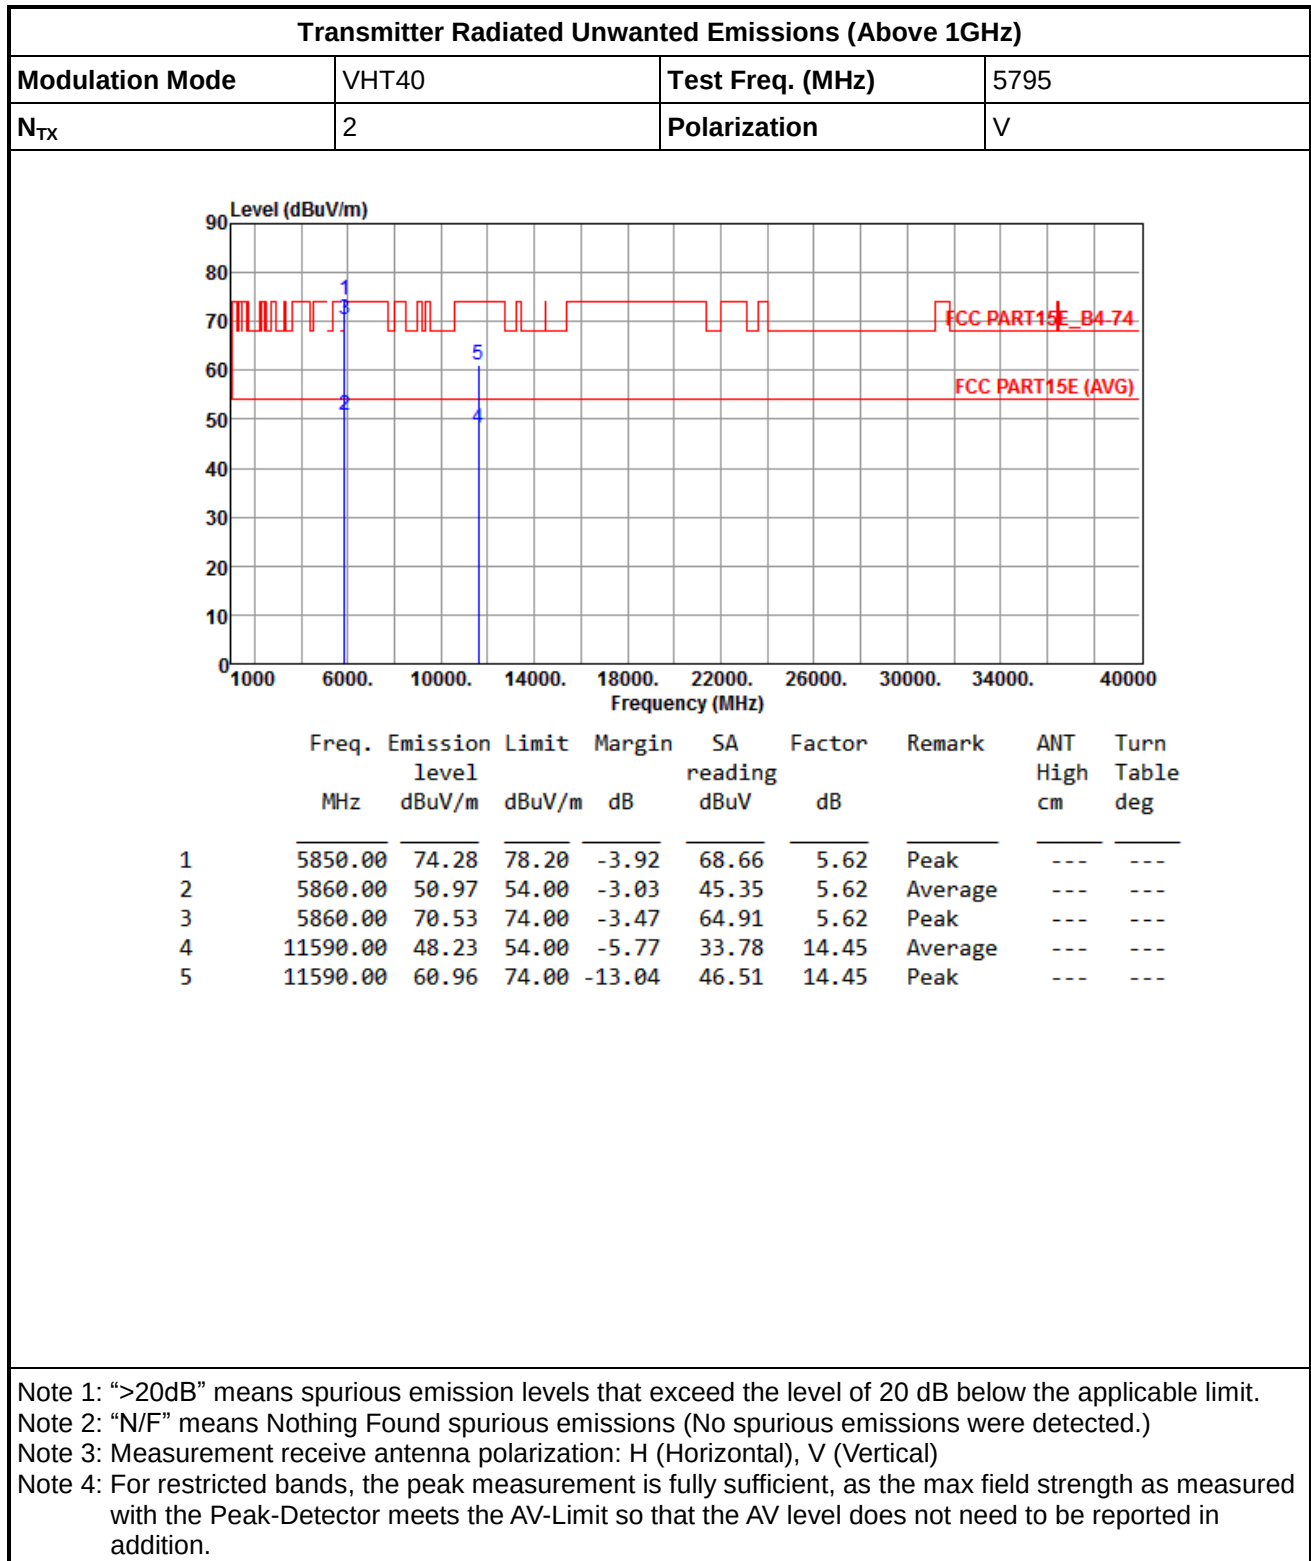

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	2	Polarization	H

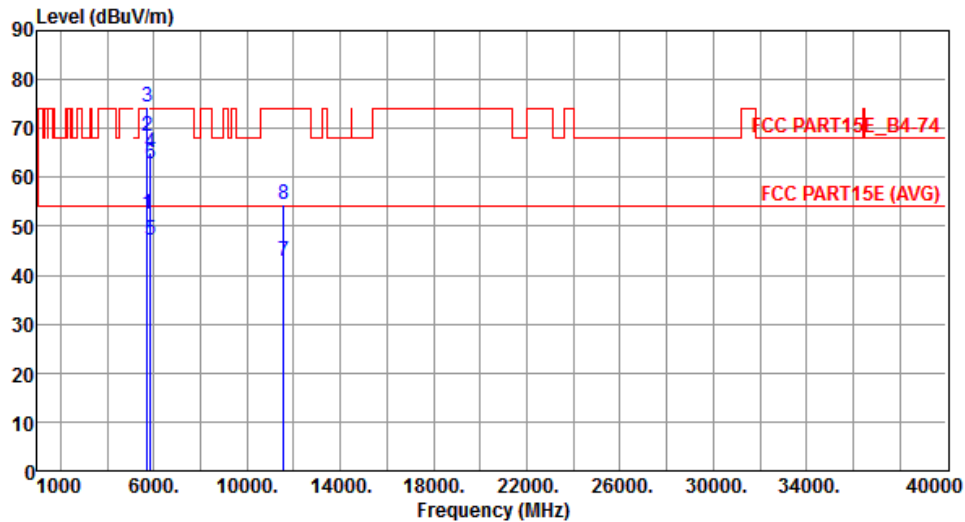

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.52	54.00	-1.48	46.94	5.58	Average	---	---
2	5715.00	68.34	74.00	-5.66	62.76	5.58	Peak	---	---
3	5725.00	74.54	78.20	-3.66	68.96	5.58	Peak	---	---
4	5850.00	65.09	78.20	-13.11	59.47	5.62	Peak	---	---
5	5860.00	47.10	54.00	-6.90	41.48	5.62	Average	---	---
6	5860.00	62.92	74.00	-11.08	57.30	5.62	Peak	---	---
7	11550.00	42.85	54.00	-11.15	28.35	14.50	Average	---	---
8	11550.00	54.59	74.00	-19.41	40.09	14.50	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N_{TX}	2	Polarization	V

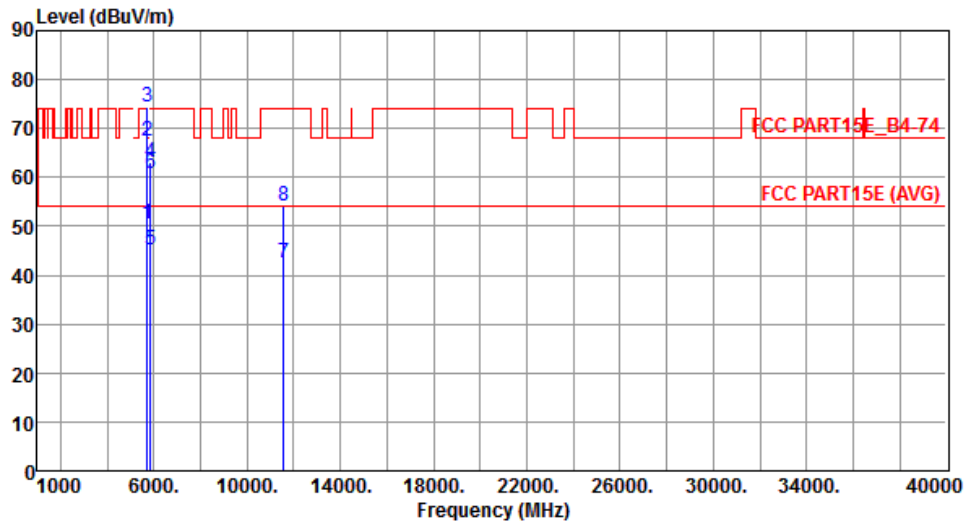

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	50.47	54.00	-3.53	44.89	5.58	Average	---	---
2	5715.00	67.28	74.00	-6.72	61.70	5.58	Peak	---	---
3	5725.00	74.29	78.20	-3.91	68.71	5.58	Peak	---	---
4	5850.00	63.00	78.20	-15.20	57.38	5.62	Peak	---	---
5	5860.00	45.29	54.00	-8.71	39.67	5.62	Average	---	---
6	5860.00	60.88	74.00	-13.12	55.26	5.62	Peak	---	---
7	11550.00	42.61	54.00	-11.39	28.11	14.50	Average	---	---
8	11550.00	54.23	74.00	-19.77	39.73	14.50	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Mode 3: External antenna with adapter mode

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11a				Test Freq. (MHz)	5745			
N _{TX}	2				Polarization	H			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	49.22	54.00	-4.78	43.64	5.58	Average	---	---
2	5715.00	70.30	74.00	-3.70	64.72	5.58	Peak	---	---
3	5725.00	77.20	78.20	-1.00	71.62	5.58	Peak	---	---
4	11490.00	51.02	54.00	-2.98	36.45	14.57	Average	---	---
5	11490.00	66.93	74.00	-7.07	52.36	14.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	2	Polarization	V

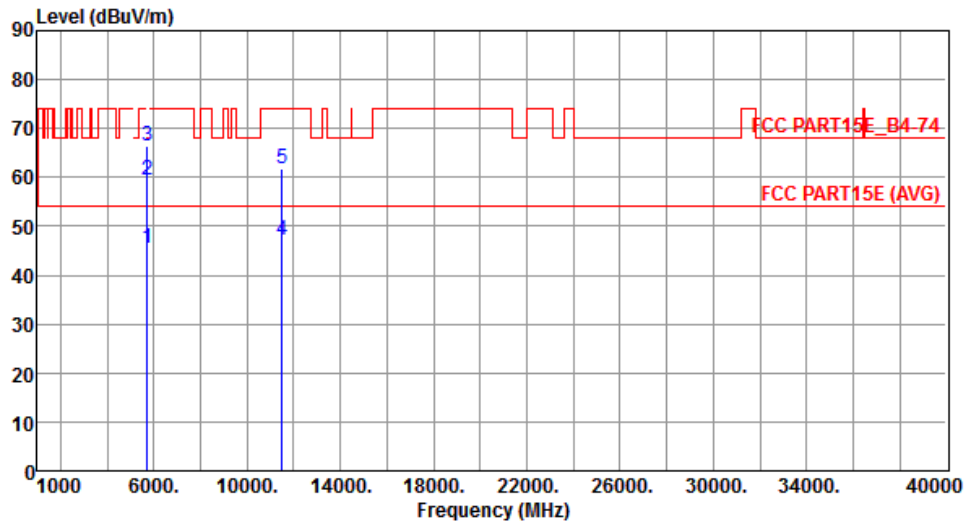

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	45.45	54.00	-8.55	39.87	5.58	Average	---	---
2	5715.00	59.43	74.00	-14.57	53.85	5.58	Peak	---	---
3	5725.00	66.53	78.20	-11.67	60.95	5.58	Peak	---	---
4	11490.00	47.13	54.00	-6.87	32.56	14.57	Average	---	---
5	11490.00	61.88	74.00	-12.12	47.31	14.57	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	H

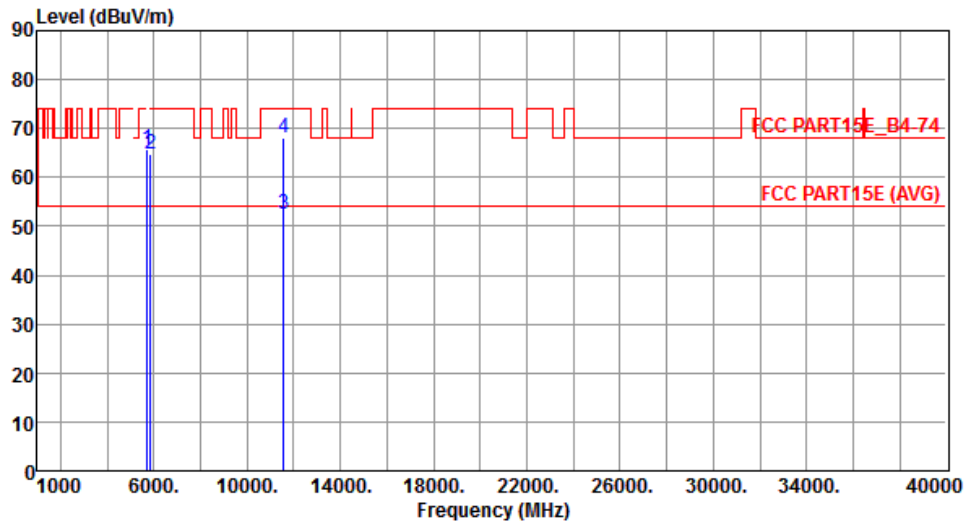


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	65.89	78.20	-12.31	60.31	5.58	Peak	---	---
2	5850.00	64.89	78.20	-13.31	59.27	5.62	Peak	---	---
3	11570.00	52.52	54.00	-1.48	38.03	14.49	Average	---	---
4	11570.00	68.22	74.00	-5.78	53.73	14.49	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

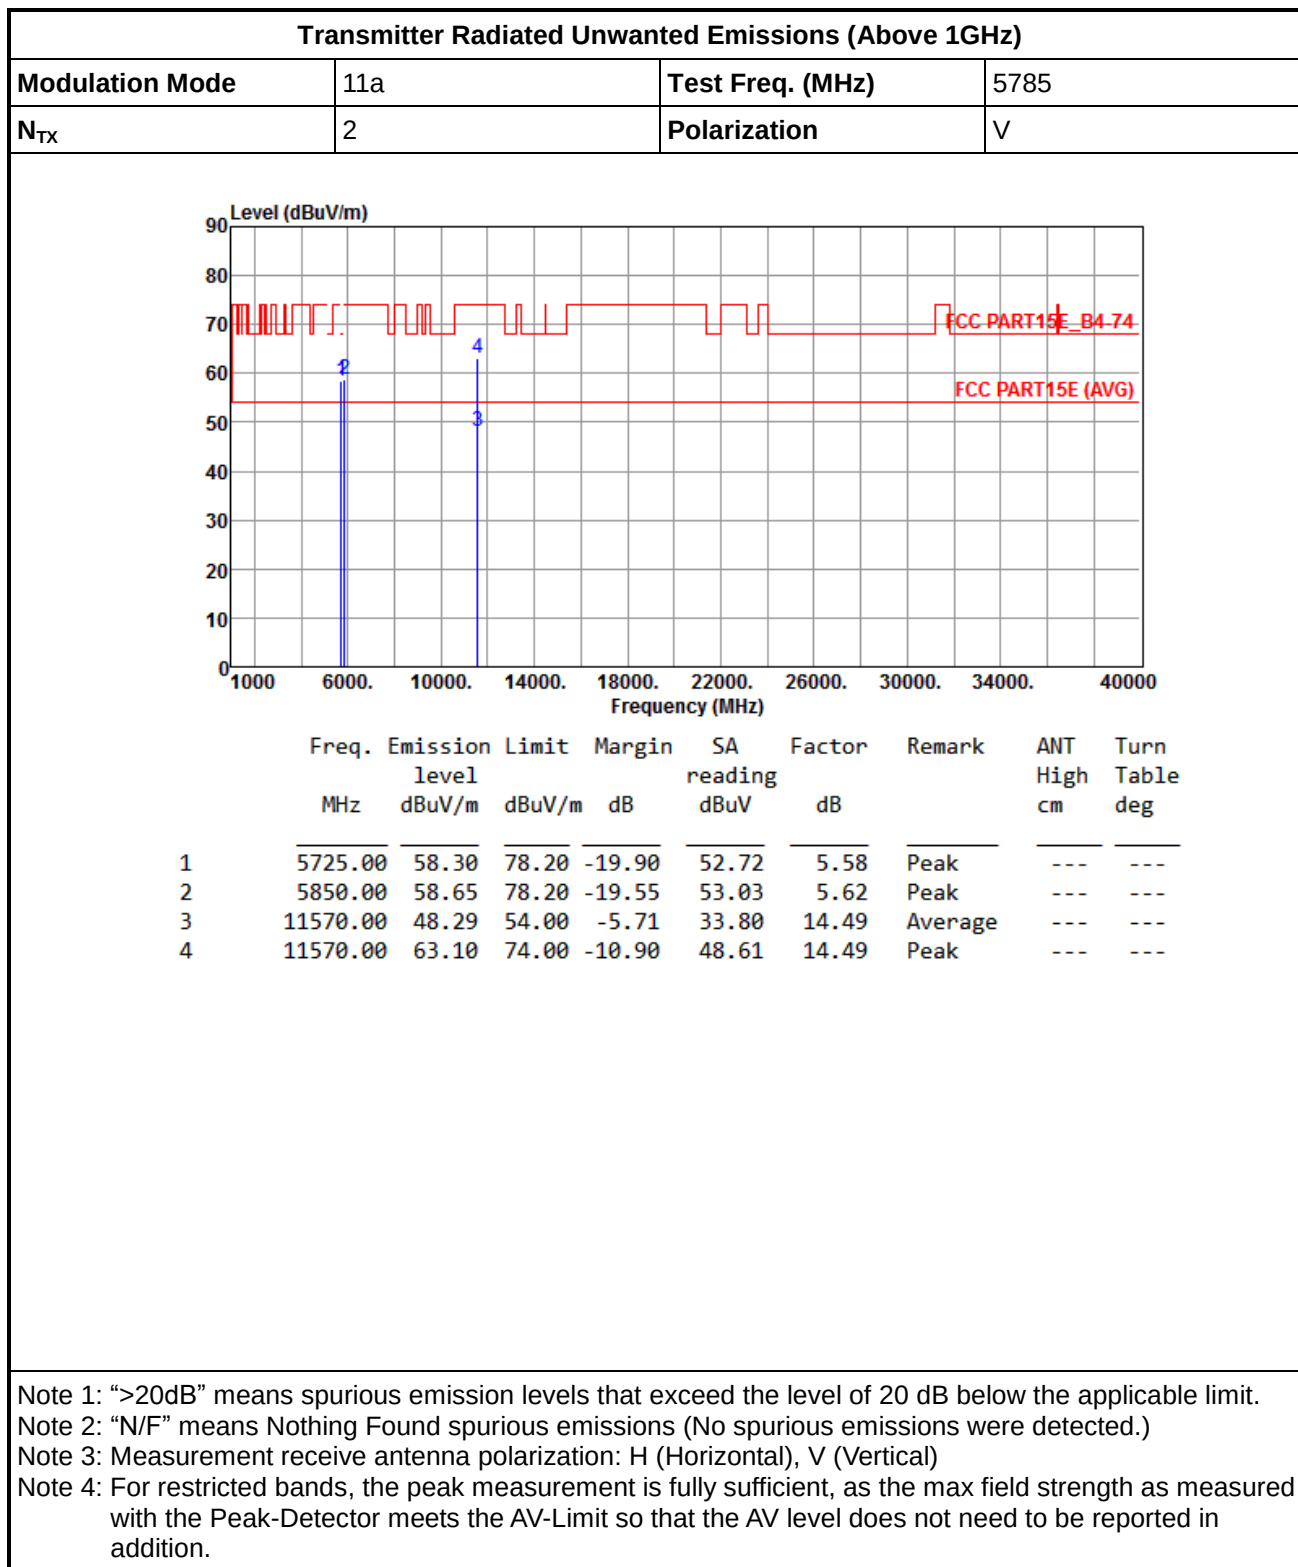

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	H

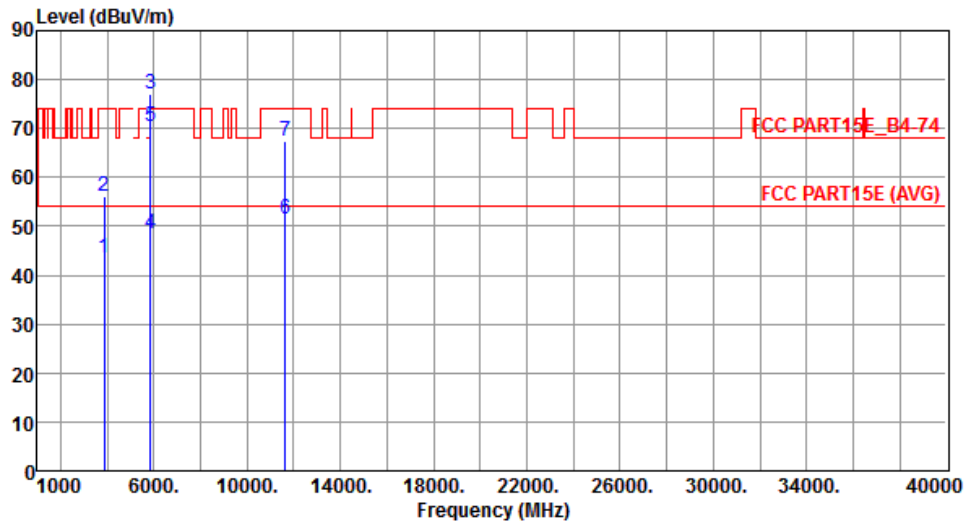


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3883.30	43.39	54.00	-10.61	42.13	1.26	Average	---	---
2	3883.30	56.25	74.00	-17.75	54.99	1.26	Peak	---	---
3	5850.00	77.14	78.20	-1.06	71.52	5.62	Peak	---	---
4	5860.00	48.65	54.00	-5.35	43.03	5.62	Average	---	---
5	5860.00	70.53	74.00	-3.47	64.91	5.62	Peak	---	---
6	11650.00	51.48	54.00	-2.52	37.09	14.39	Average	---	---
7	11650.00	67.36	74.00	-6.64	52.97	14.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

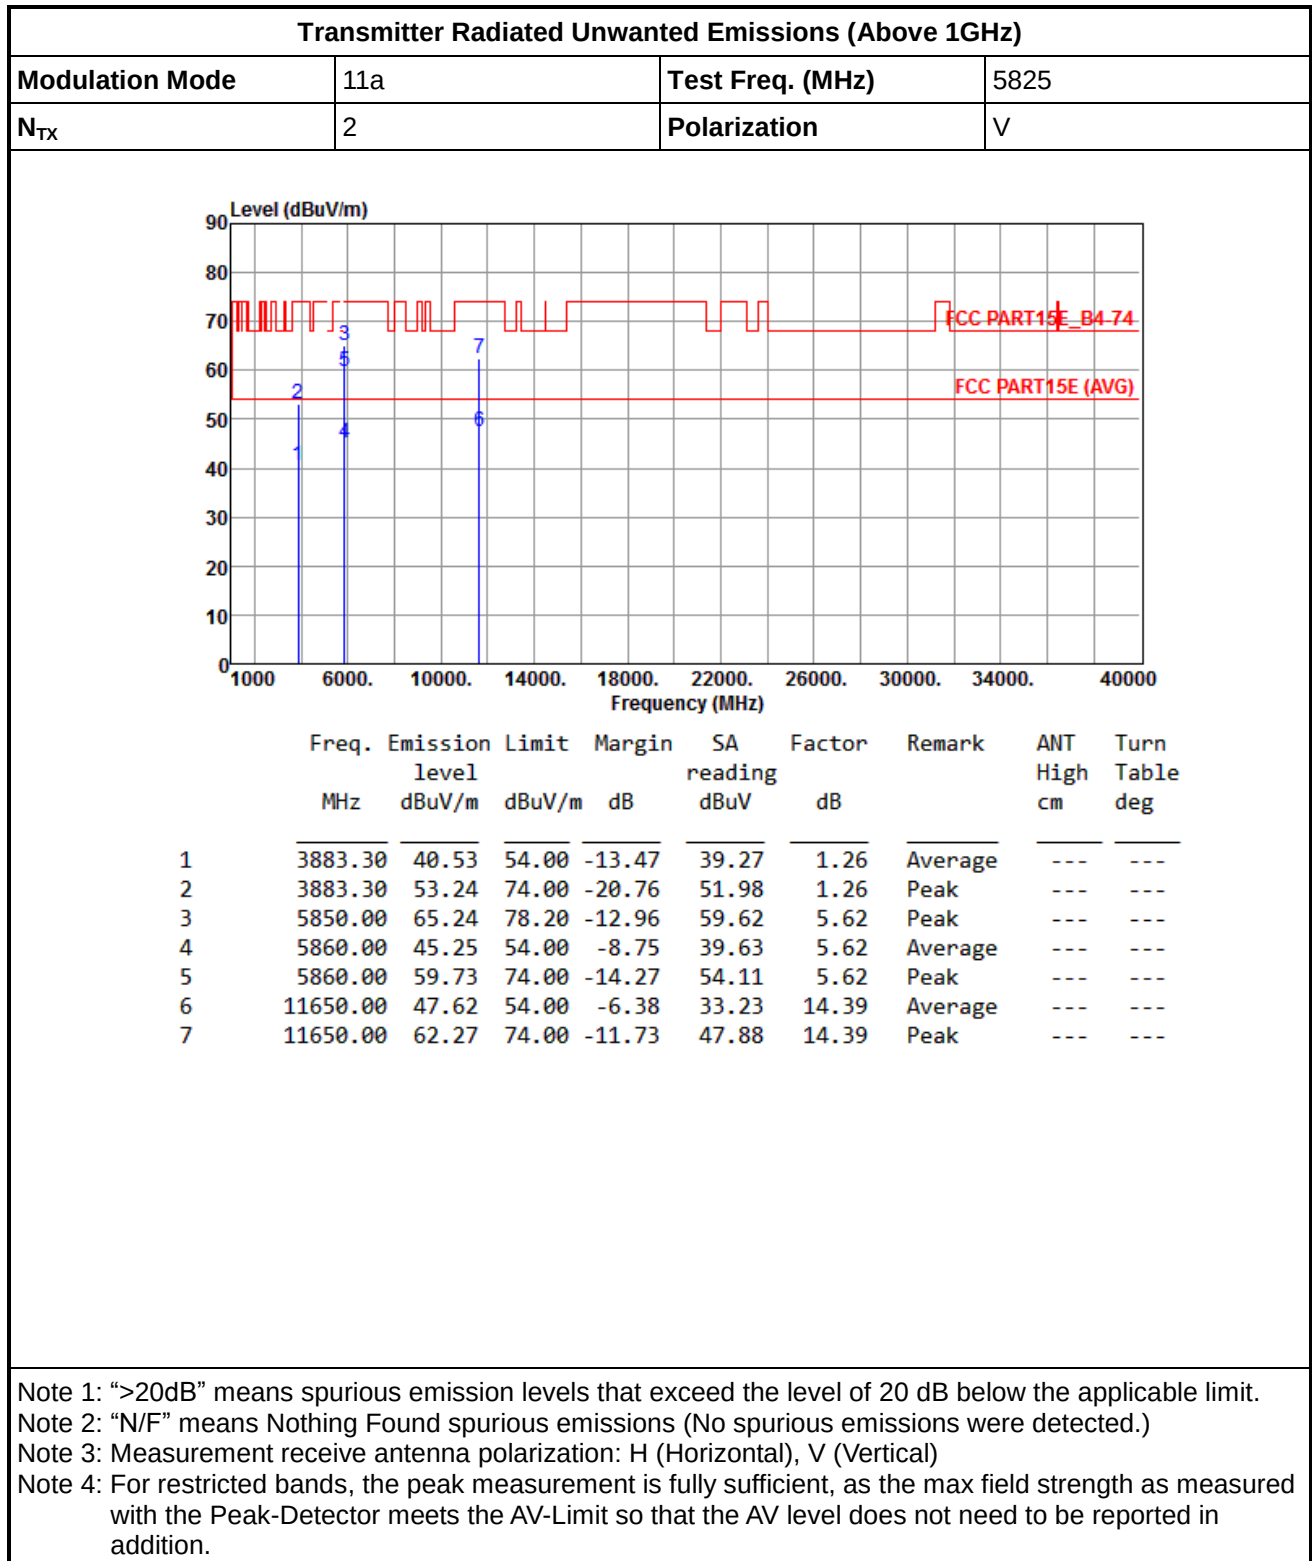

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N_{TX}	2	Polarization	H

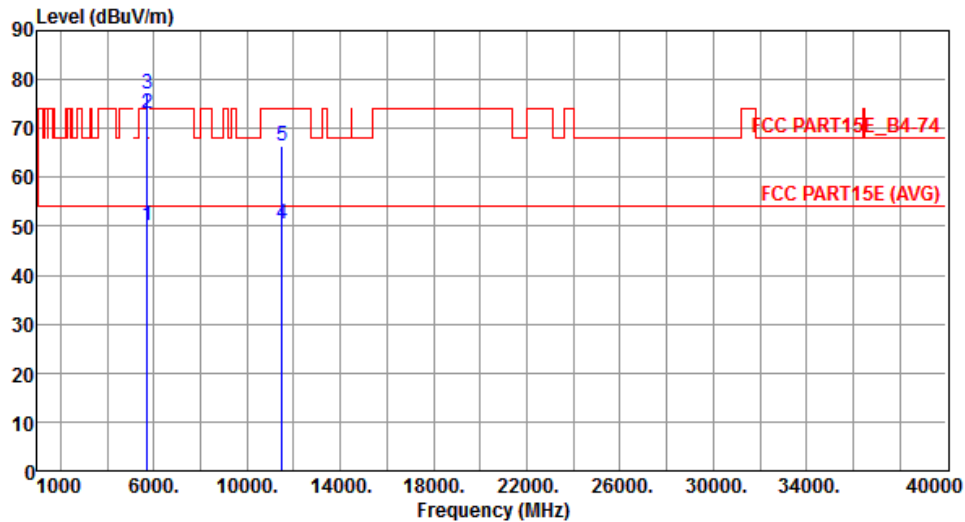


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	50.05	54.00	-3.95	44.47	5.58	Average	---	---
2	5715.00	73.00	74.00	-1.00	67.42	5.58	Peak	---	---
3	5725.00	77.00	78.20	-1.20	71.42	5.58	Peak	---	---
4	11490.00	50.56	54.00	-3.44	35.99	14.57	Average	---	---
5	11490.00	66.42	74.00	-7.58	51.85	14.57	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

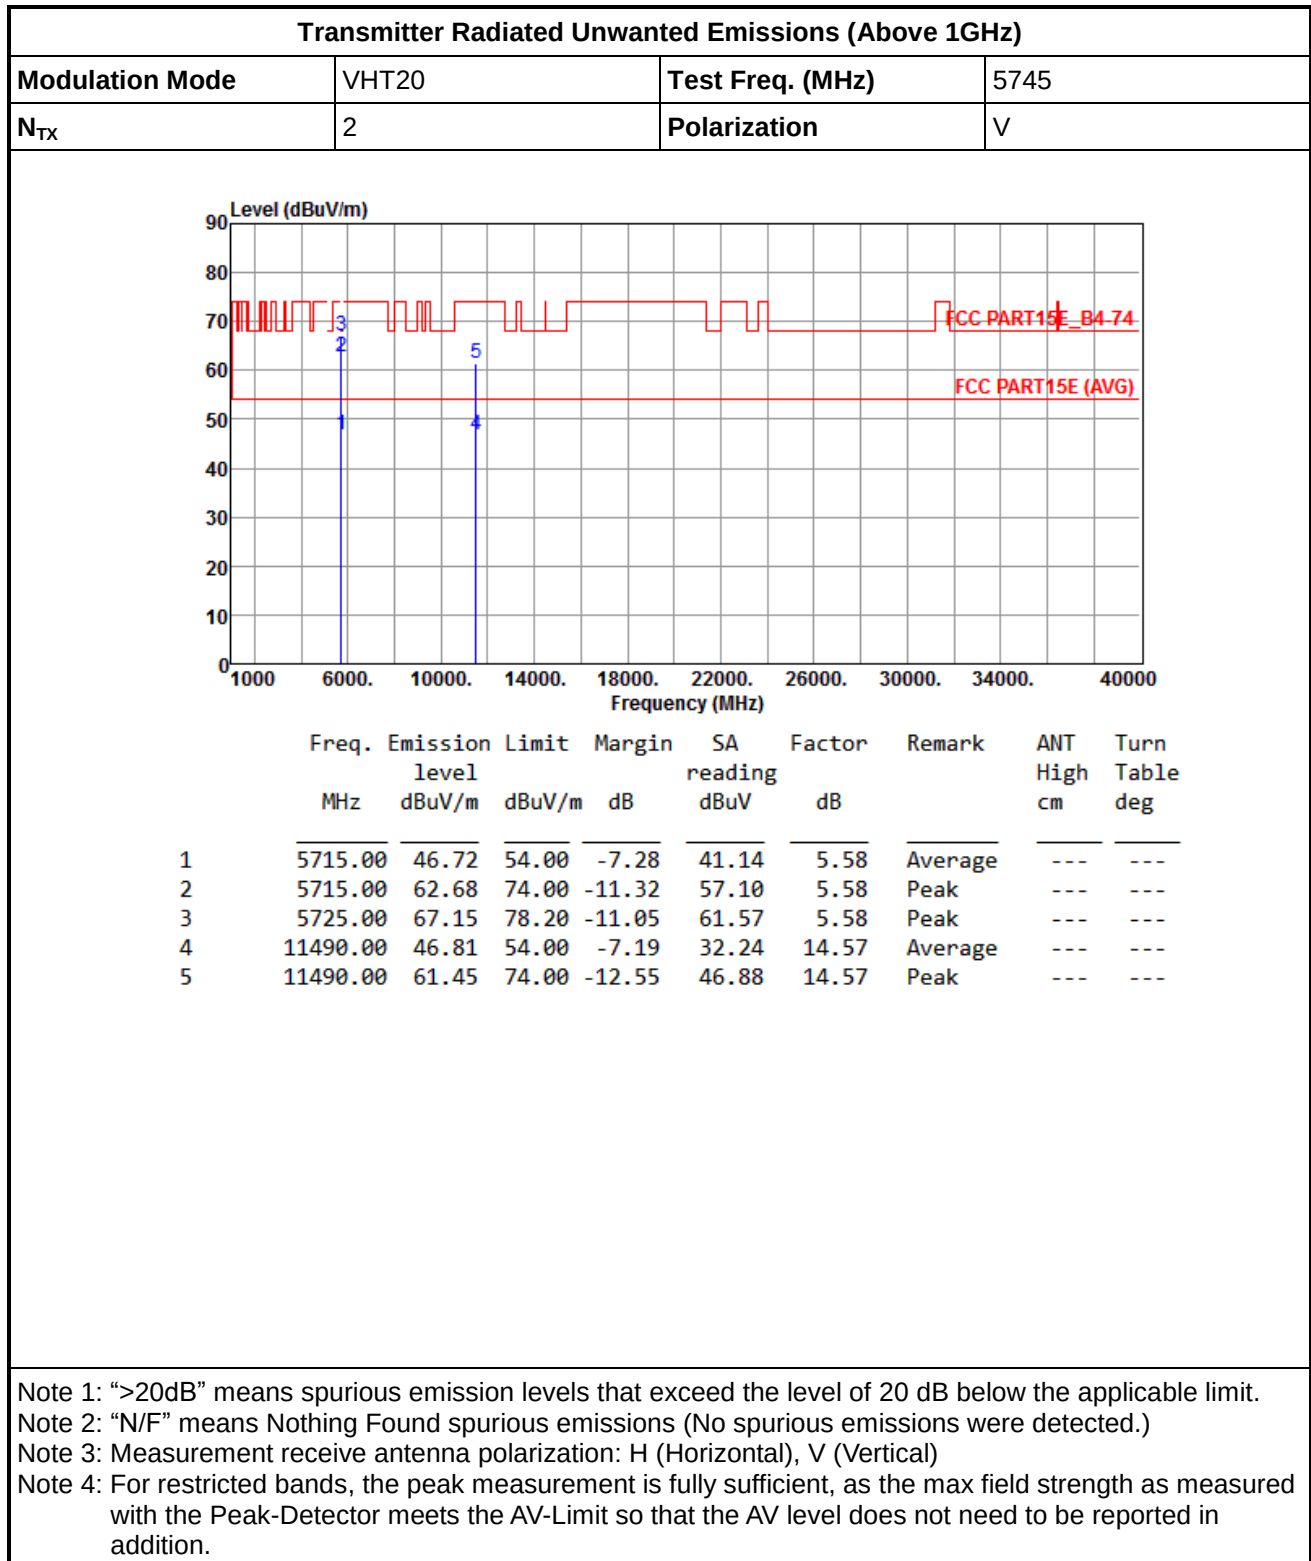

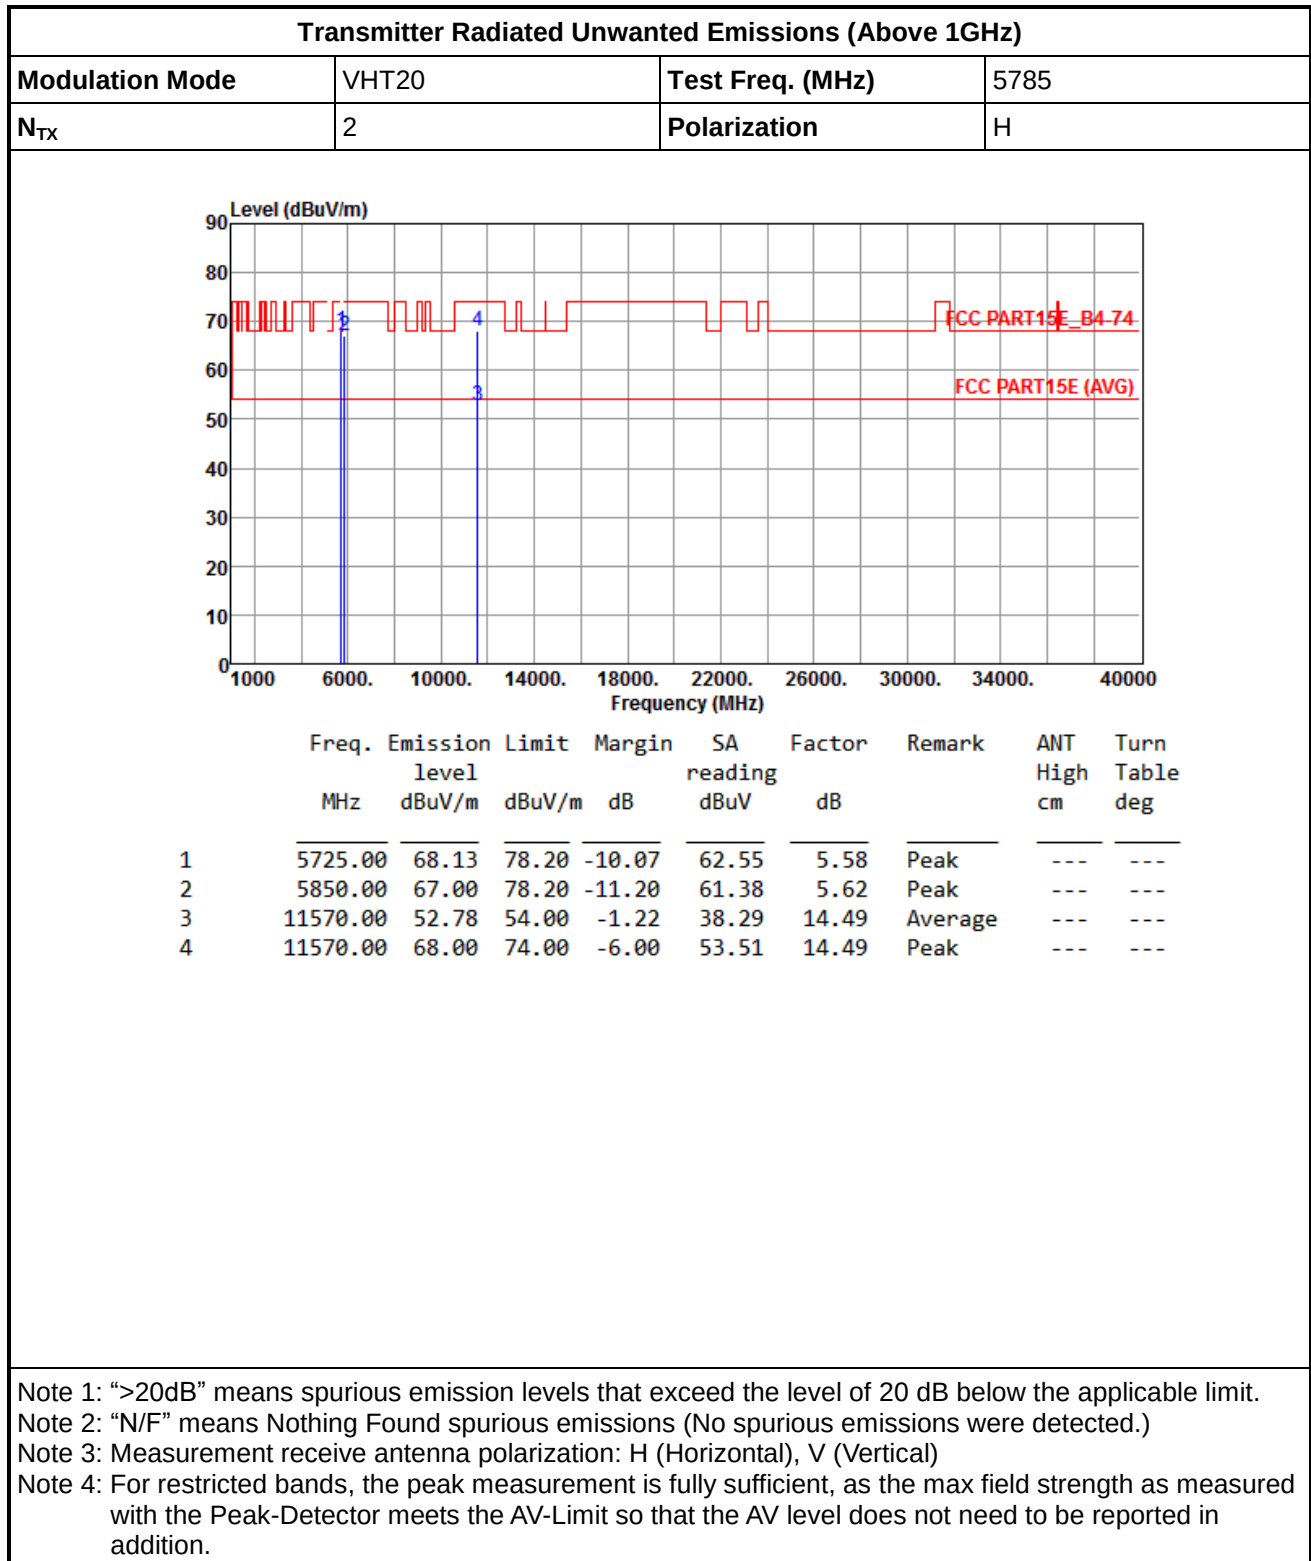

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	2	Polarization	V

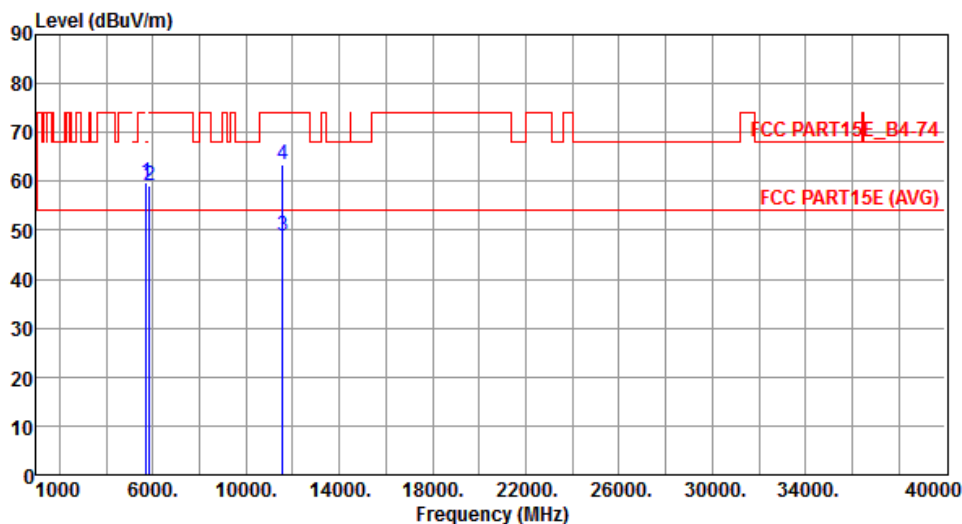

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5725.00	59.88	78.20	-18.32	54.30	5.58	Peak	---	---
2	5850.00	59.23	78.20	-18.97	53.61	5.62	Peak	---	---
3	11570.00	48.67	54.00	-5.33	34.18	14.49	Average	---	---
4	11570.00	63.55	74.00	-10.45	49.06	14.49	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	H

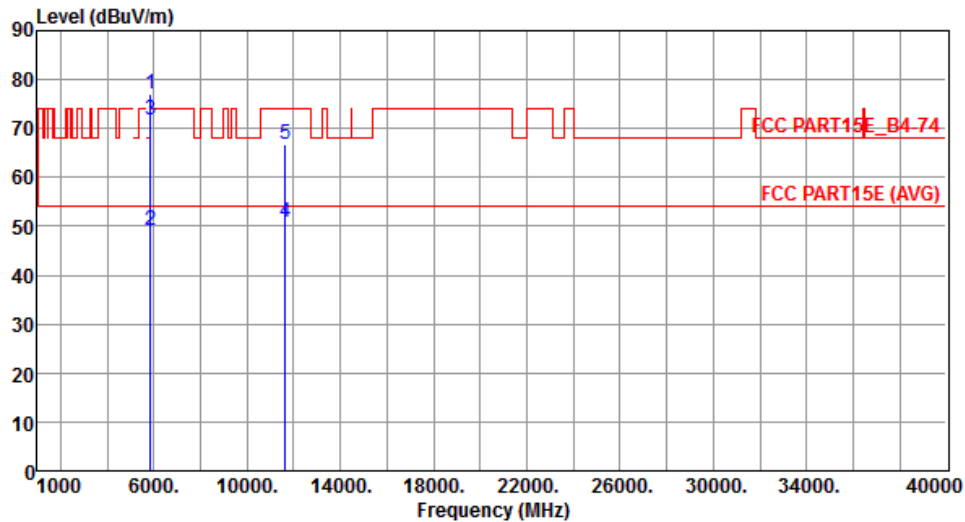

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	77.20	78.20	-1.00	71.58	5.62	Peak	---	---
2	5860.00	49.17	54.00	-4.83	43.55	5.62	Average	---	---
3	5860.00	71.72	74.00	-2.28	66.10	5.62	Peak	---	---
4	11650.00	50.97	54.00	-3.03	36.58	14.39	Average	---	---
5	11650.00	66.84	74.00	-7.16	52.45	14.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	2	Polarization	V

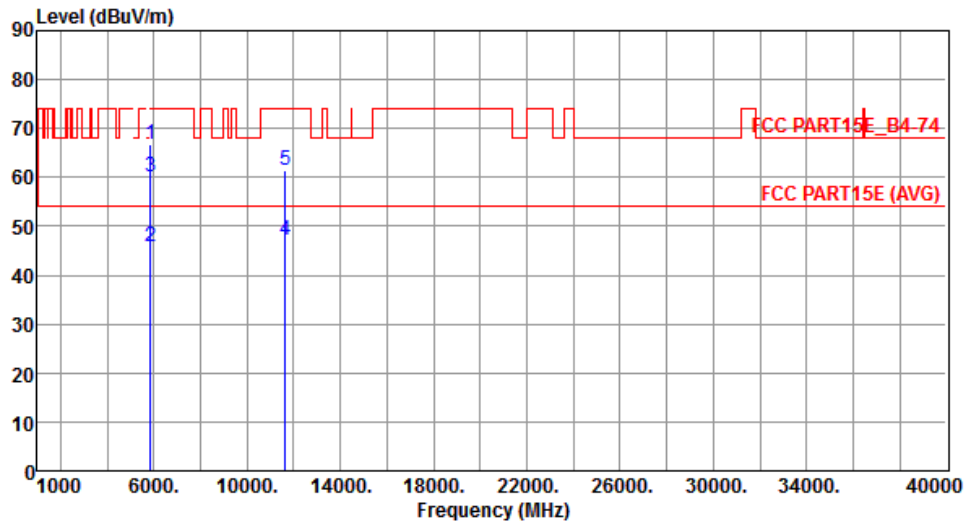

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	66.81	78.20	-11.39	61.19	5.62	Peak	---	---
2	5860.00	45.79	54.00	-8.21	40.17	5.62	Average	---	---
3	5860.00	60.20	74.00	-13.80	54.58	5.62	Peak	---	---
4	11650.00	47.12	54.00	-6.88	32.73	14.39	Average	---	---
5	11650.00	61.57	74.00	-12.43	47.18	14.39	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	2	Polarization	H

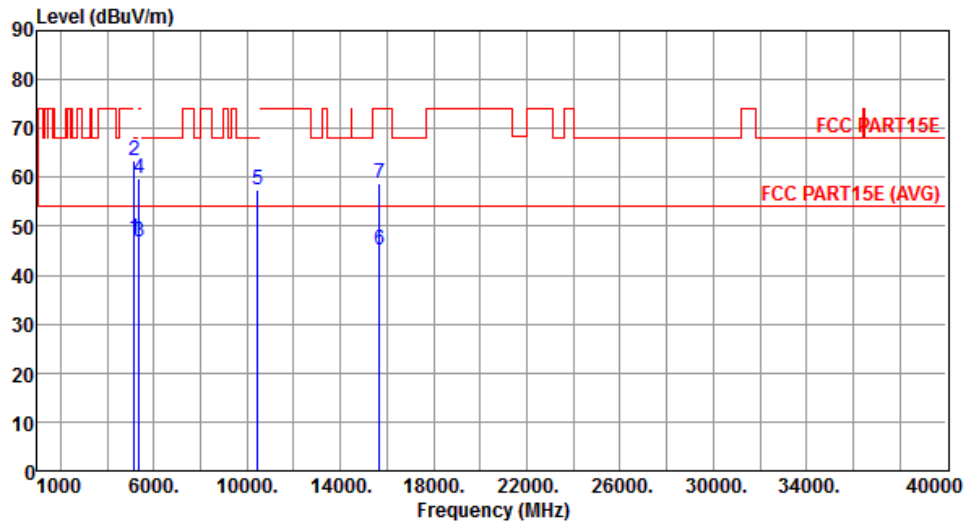

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.60	54.00	-6.40	42.04	5.56	Average	---	---
2	5150.00	63.41	74.00	-10.59	57.85	5.56	Peak	---	---
3	5350.00	46.93	54.00	-7.07	41.22	5.71	Average	---	---
4	5350.00	59.92	74.00	-14.08	54.21	5.71	Peak	---	---
5	10460.00	57.34	68.20	-10.86	42.13	15.21	Peak	---	---
6	15690.00	45.13	54.00	-8.87	30.82	14.31	Average	---	---
7	15690.00	58.78	74.00	-15.22	44.47	14.31	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	2	Polarization	V

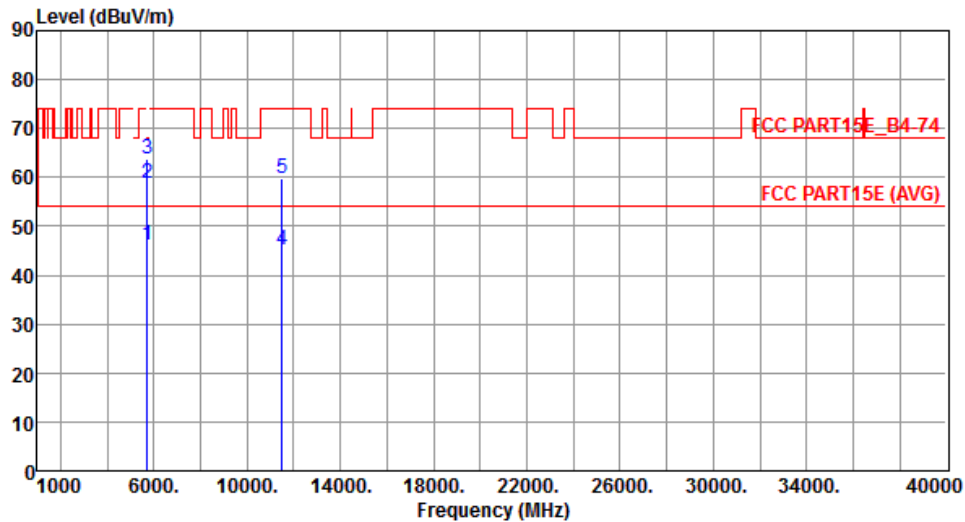

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	46.22	54.00	-7.78	40.64	5.58	Average	---	---
2	5715.00	58.73	74.00	-15.27	53.15	5.58	Peak	---	---
3	5725.00	63.91	78.20	-14.29	58.33	5.58	Peak	---	---
4	11510.00	45.02	54.00	-8.98	30.47	14.55	Average	---	---
5	11510.00	59.68	74.00	-14.32	45.13	14.55	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N_{TX}	2	Polarization	H

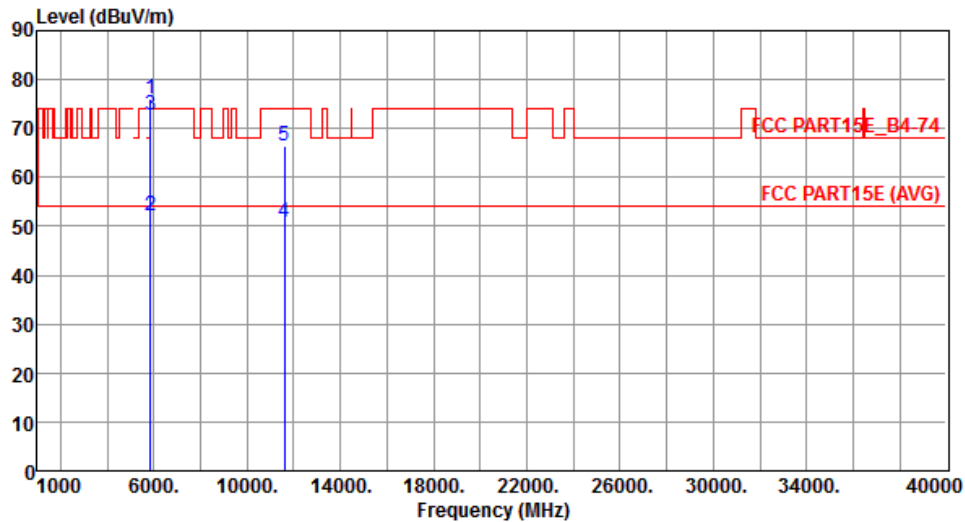


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	75.90	78.20	-2.30	70.28	5.62	Peak	---	---
2	5860.00	52.23	54.00	-1.77	46.61	5.62	Average	---	---
3	5860.00	72.73	74.00	-1.27	67.11	5.62	Peak	---	---
4	11590.00	50.73	54.00	-3.27	36.28	14.45	Average	---	---
5	11590.00	66.48	74.00	-7.52	52.03	14.45	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

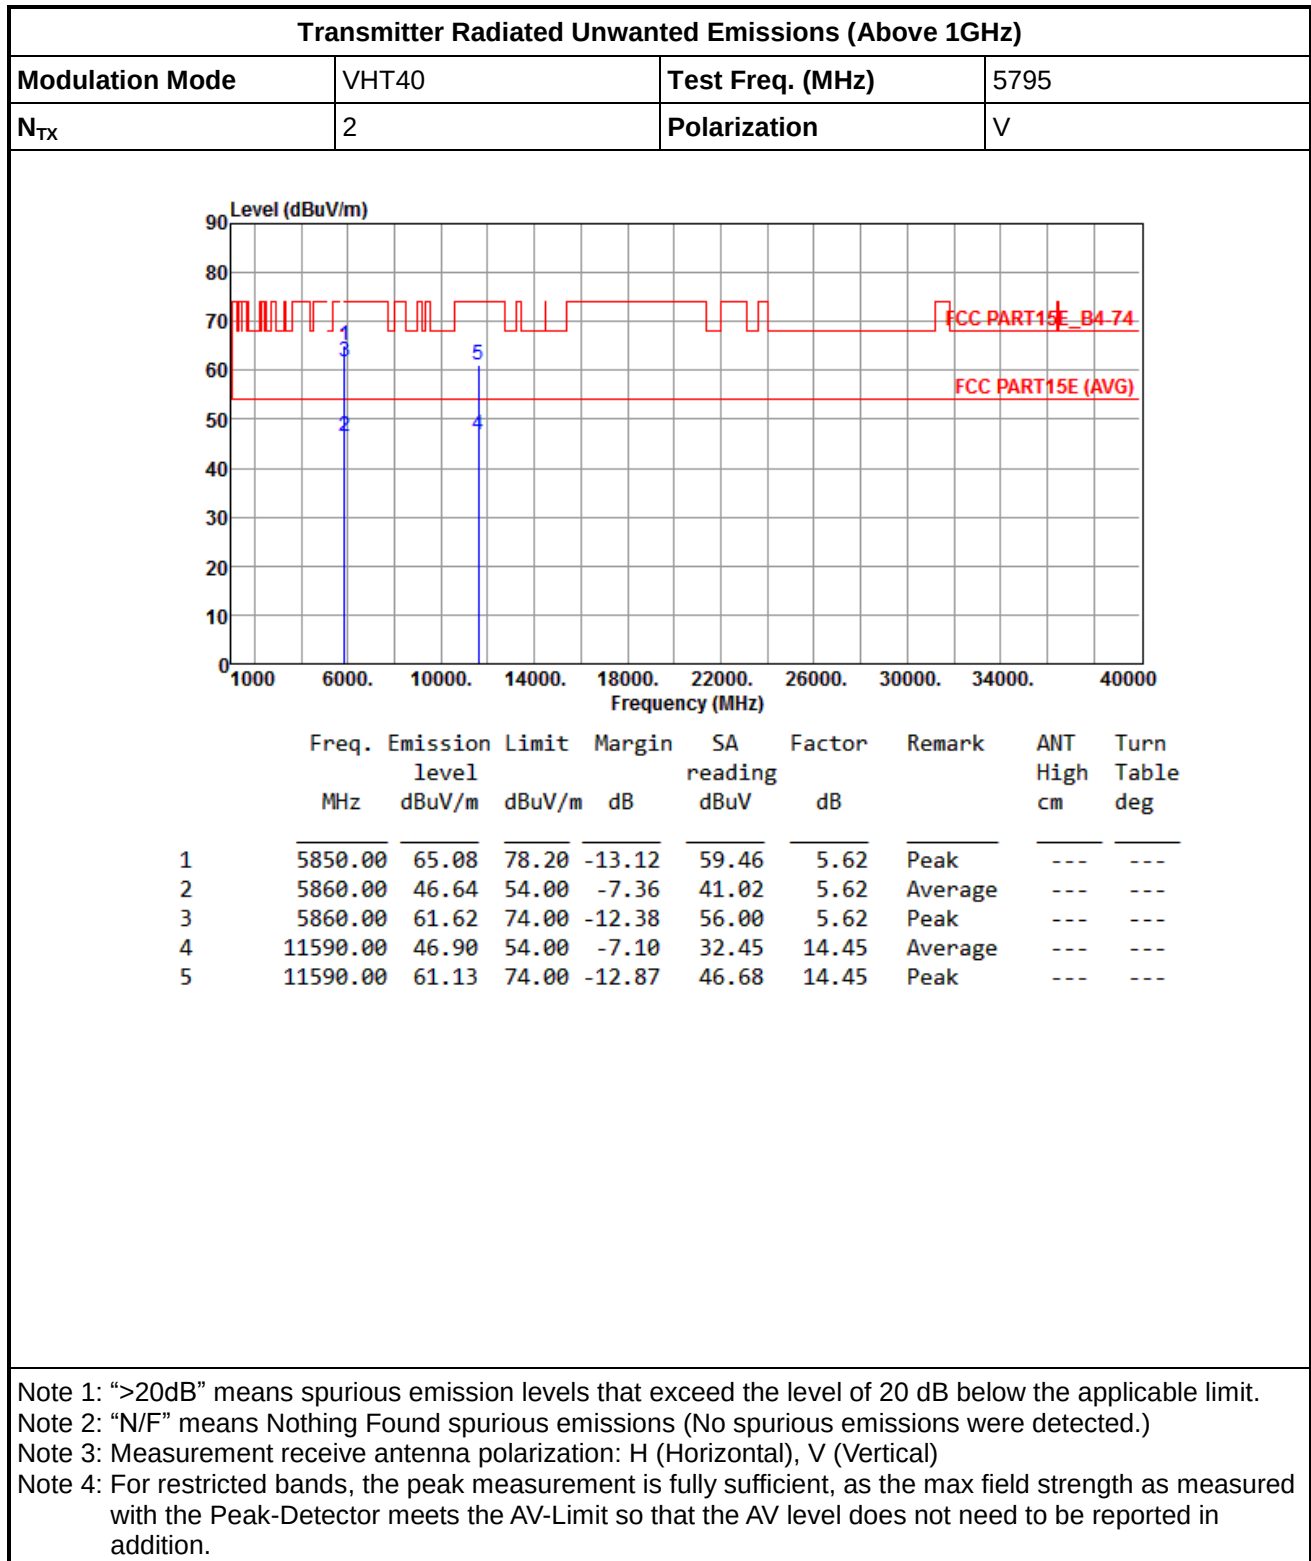

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N_{TX}	2	Polarization	H

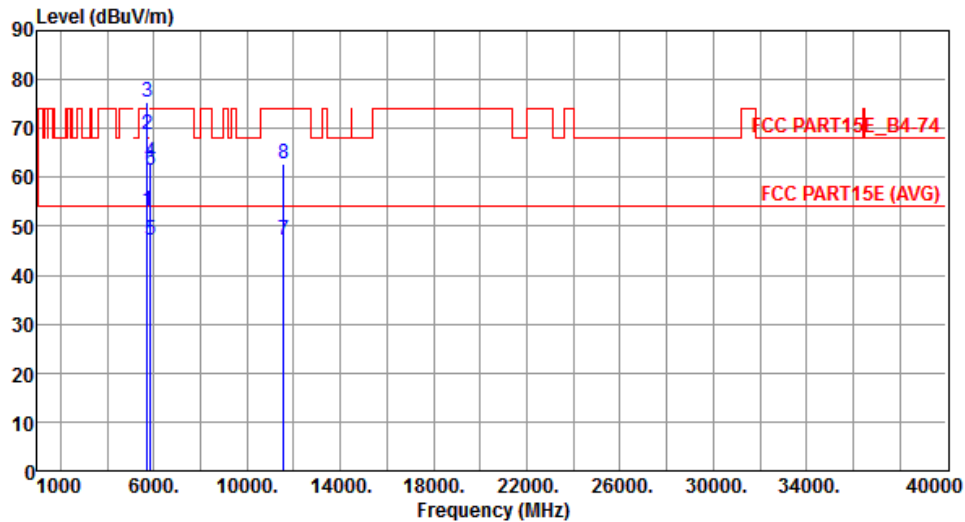

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	53.00	54.00	-1.00	47.42	5.58	Average	---	---
2	5715.00	68.78	74.00	-5.22	63.20	5.58	Peak	---	---
3	5725.00	75.35	78.20	-2.85	69.77	5.58	Peak	---	---
4	5850.00	63.07	78.20	-15.13	57.45	5.62	Peak	---	---
5	5860.00	47.27	54.00	-6.73	41.65	5.62	Average	---	---
6	5860.00	61.34	74.00	-12.66	55.72	5.62	Peak	---	---
7	11550.00	47.15	54.00	-6.85	32.65	14.50	Average	---	---
8	11550.00	62.75	74.00	-11.25	48.25	14.50	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	2	Polarization	V

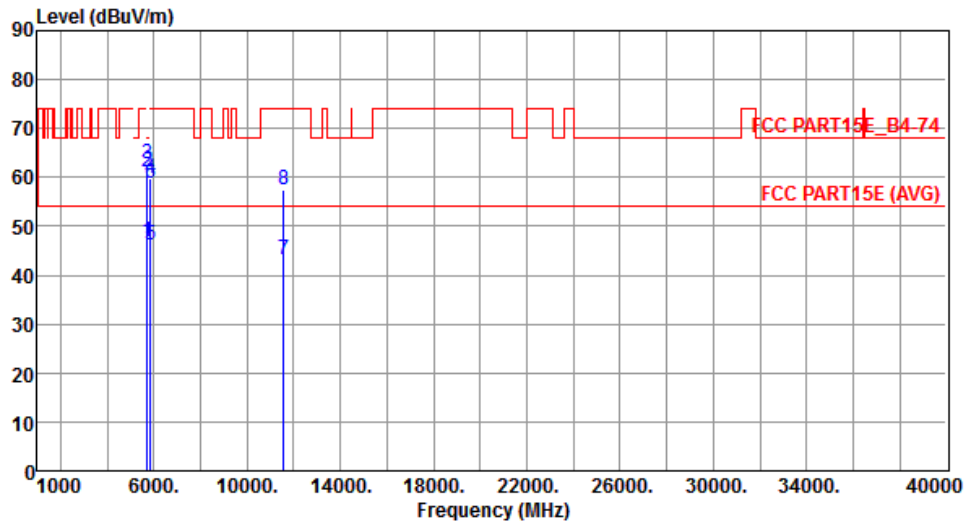

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	46.80	54.00	-7.20	41.22	5.58	Average	---	---
2	5715.00	61.24	74.00	-12.76	55.66	5.58	Peak	---	---
3	5725.00	62.86	78.20	-15.34	57.28	5.58	Peak	---	---
4	5850.00	59.81	78.20	-18.39	54.19	5.62	Peak	---	---
5	5860.00	46.21	54.00	-7.79	40.59	5.62	Average	---	---
6	5860.00	58.72	74.00	-15.28	53.10	5.62	Peak	---	---
7	11550.00	43.08	54.00	-10.92	28.58	14.50	Average	---	---
8	11550.00	57.36	74.00	-16.64	42.86	14.50	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

3.6 Frequency Stability

3.6.1 Frequency Stability Limit

Frequency Stability Limit	
UNII Devices	
☒	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
LE-LAN Devices	
☒	N/A
IEEE Std. 802.11n-2009	
☒	The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band and ± 25 ppm maximum for the 2.4 GHz band.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
☒	Frequency stability with respect to ambient temperature
☒	Frequency stability when varying supply voltage
☒	For conducted measurement.
☒	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
☐	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.6.4 Test Setup

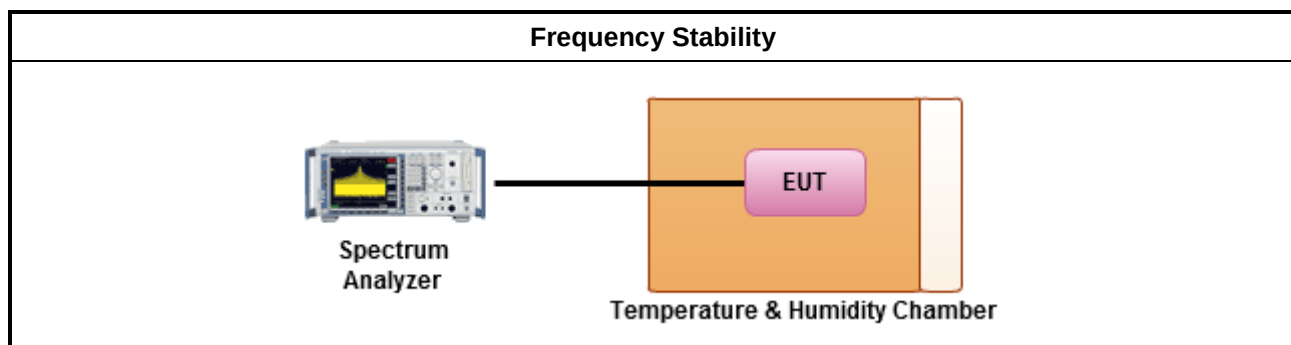

3.6.5 Test Result of Frequency Stability

Mode 1: Internal antenna with adapter mode

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T _{20°C} Vmax	5785	5784.99704	-0.5117
T _{20°C} Vmin	5785	5785.02677	4.6275
T _{50°C} Vnom	5785	5785.02544	4.3976
T _{40°C} Vnom	5785	5785.02875	4.9697
T _{30°C} Vnom	5785	5784.99030	-1.6768
T _{20°C} Vnom	5785	5785.01066	1.8427
T _{10°C} Vnom	5785	5785.00853	1.4745
T _{0°C} Vnom	5785	5785.00206	0.3561
T _{-10°C} Vnom	5785	5785.00419	0.7243
T _{-20°C} Vnom	5785	5785.00678	1.1720
T _{-30°C} Vnom	5785	5784.99437	-0.9732
Limit (ppm)		20	
Result		Complied	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].			
Note 2: The nominal voltage refer test report clause 1.1.6 for EUT operational condition.			

Mode 2: External antenna with adapter mode

Frequency Stability Result			
Mode		Frequency Stability (ppm)	
Condition	Freq. (MHz)	Test Frequency (MHz)	Frequency Stability (ppm)
T _{20°C} V _{max}	5785	5785.01009	1.7442
T _{20°C} V _{min}	5785	5785.02659	4.5964
T _{50°C} V _{nom}	5785	5785.03828	6.6171
T _{40°C} V _{nom}	5785	5785.00306	0.5290
T _{30°C} V _{nom}	5785	5785.01939	3.3518
T _{20°C} V _{nom}	5785	5785.02286	3.9516
T _{10°C} V _{nom}	5785	5785.01859	3.2135
T _{0°C} V _{nom}	5785	5785.00866	1.4970
T _{-10°C} V _{nom}	5785	5785.01307	2.2593
T _{-20°C} V _{nom}	5785	5784.99031	-1.6750
T _{-30°C} V _{nom}	5785	5785.01298	2.2437
Limit (ppm)		20	
Result		Complied	
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom].			
Note 2: The nominal voltage refer test report clause 1.1.6 for EUT operational condition.			

4 Test Equipment and Calibration Data

Test Item	Radiated Emissions				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Note: Calibration Interval of instruments listed above is two year.					

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Note: Calibration Interval of instruments listed above is one year.					



Test Item	RF Conducted				
Test Site	TH01-HY				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 17, 2014	Feb. 16, 2015
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	Nov. 21, 2013	Nov. 20, 2014
Signal Generator	R&S	SMB100A	175727	Jan. 07, 2014	Jan. 06, 2015
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
DC Power Source	G.W.	GPS-3030DD	GEN865896	Nov. 21, 2013	Nov. 20, 2014
AC Power Source	G.W	APS-9102	EL920581	Jul. 15, 2014	Jul. 14, 2015
Note: Calibration Interval of instruments listed above is one year.					