

1 CO-LOCATION

1.1 Transmitter Unwanted Emissions

1.1.1 Transmitter Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

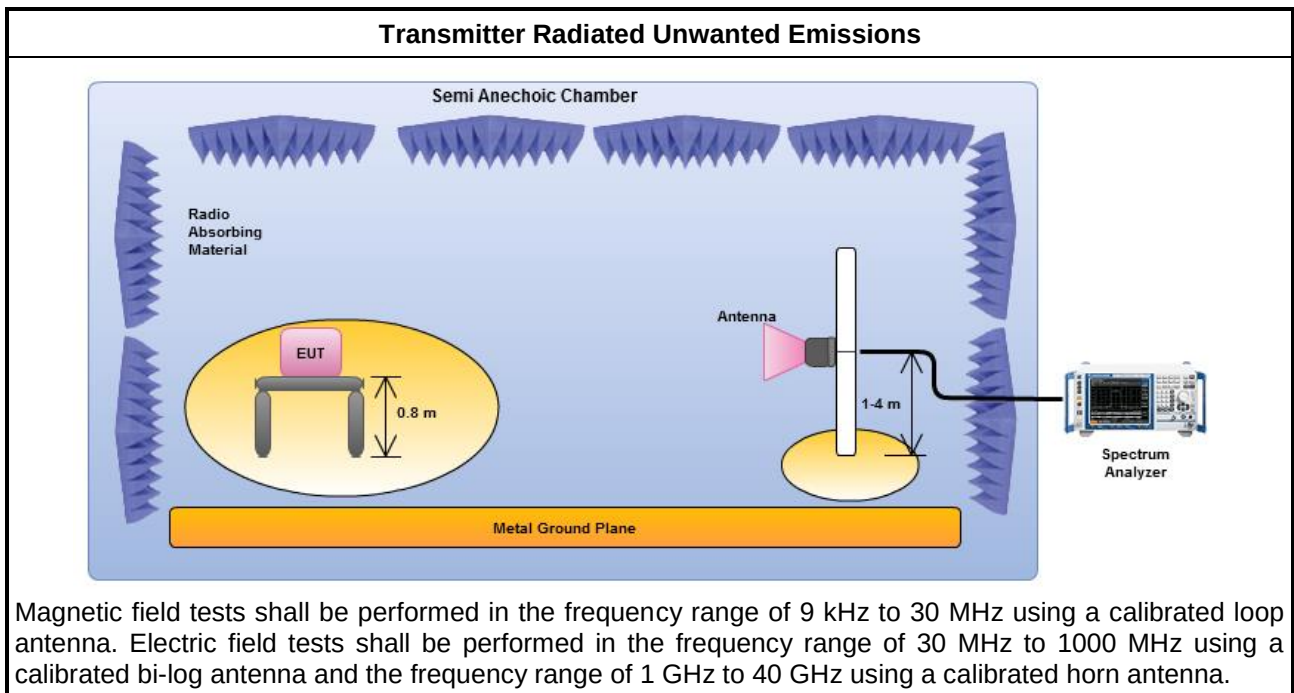
1.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


1.1.3 Test Procedures

Test Method	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time.
☒	Refer as KDB 558074, clause 12.2.3 measurement procedure peak limit.
☒	For radiated measurement, refer as ANSI C63.10,
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

1.1.4 Test Setup



Note: Test distance is 3m.

Transmitter Conducted Unwanted EmissionsSpectrum
Analyzer

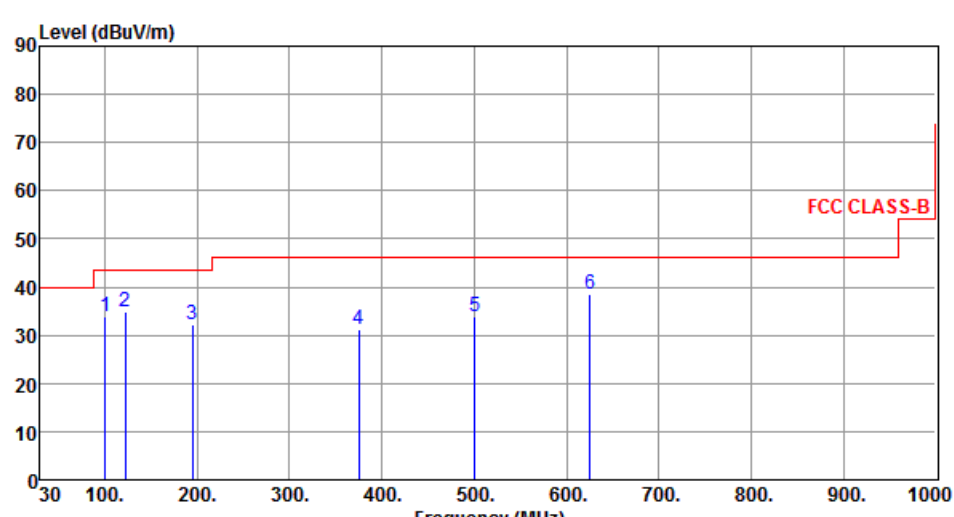
EUT

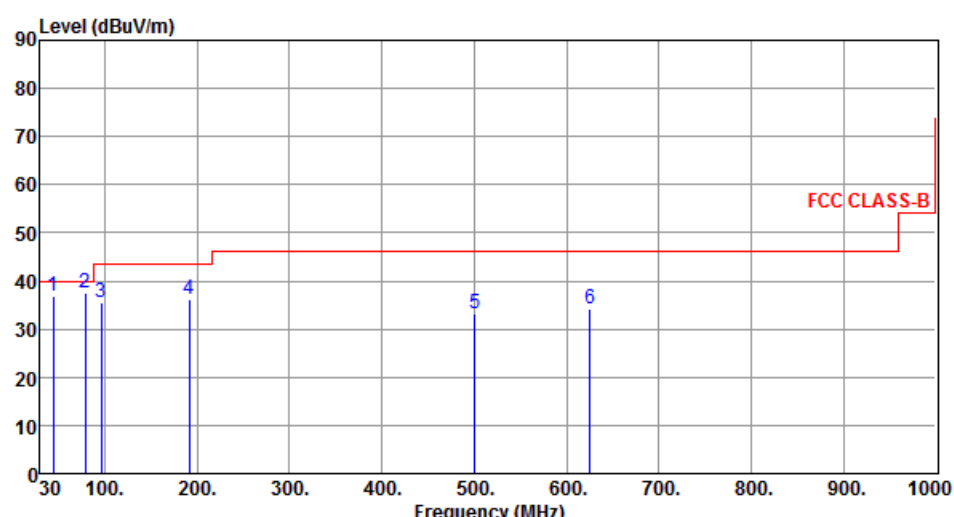
1.1.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

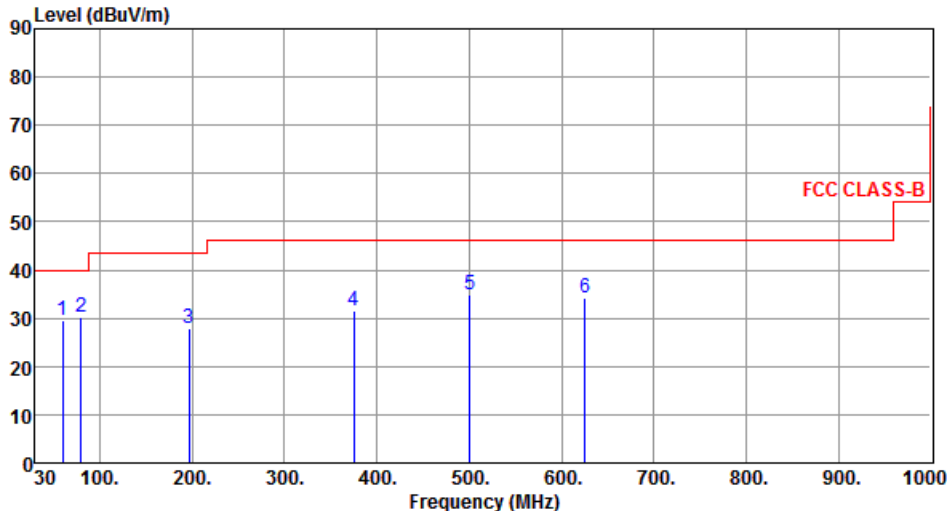
1.1.6 Results of Radiated Emissions (Below 1GHz)

Mode 1: Internal antenna with adapter mode

Transmitter Radiated Unwanted Emissions																																																																															
Operating Mode	1				Polarization		H																																																																								
Operating Function	WLAN 2.4GHz HT20 CH6 + 5GHz VHT20 CH48																																																																														
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>100.53</td><td>33.94</td><td>43.50</td><td>-9.56</td><td>55.69</td><td>-21.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>122.43</td><td>34.87</td><td>43.50</td><td>-8.63</td><td>53.80</td><td>-18.93</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>194.58</td><td>32.26</td><td>43.50</td><td>-11.24</td><td>51.89</td><td>-19.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>375.26</td><td>31.17</td><td>46.00</td><td>-14.83</td><td>45.51</td><td>-14.34</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>500.39</td><td>33.99</td><td>46.00</td><td>-12.01</td><td>45.53</td><td>-11.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>625.49</td><td>38.36</td><td>46.00</td><td>-7.64</td><td>47.54</td><td>-9.18</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	100.53	33.94	43.50	-9.56	55.69	-21.75	Peak	---	---	2	122.43	34.87	43.50	-8.63	53.80	-18.93	Peak	---	---	3	194.58	32.26	43.50	-11.24	51.89	-19.63	Peak	---	---	4	375.26	31.17	46.00	-14.83	45.51	-14.34	Peak	---	---	5	500.39	33.99	46.00	-12.01	45.53	-11.54	Peak	---	---	6	625.49	38.36	46.00	-7.64	47.54	-9.18	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																						
1	100.53	33.94	43.50	-9.56	55.69	-21.75	Peak	---	---																																																																						
2	122.43	34.87	43.50	-8.63	53.80	-18.93	Peak	---	---																																																																						
3	194.58	32.26	43.50	-11.24	51.89	-19.63	Peak	---	---																																																																						
4	375.26	31.17	46.00	-14.83	45.51	-14.34	Peak	---	---																																																																						
5	500.39	33.99	46.00	-12.01	45.53	-11.54	Peak	---	---																																																																						
6	625.49	38.36	46.00	-7.64	47.54	-9.18	Peak	---	---																																																																						
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																															

Transmitter Radiated Unwanted Emissions																																																																															
Operating Mode	1				Polarization			V																																																																							
Operating Function	WLAN 2.4GHz HT20 CH6 + 5GHz VHT20 CH48																																																																														
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>44.52</td><td>36.89</td><td>40.00</td><td>-3.11</td><td>53.71</td><td>-16.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>79.23</td><td>37.54</td><td>40.00</td><td>-2.46</td><td>59.01</td><td>-21.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>96.54</td><td>35.70</td><td>43.50</td><td>-7.80</td><td>57.95</td><td>-22.25</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>191.61</td><td>36.24</td><td>43.50</td><td>-7.26</td><td>55.85</td><td>-19.61</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>500.35</td><td>33.33</td><td>46.00</td><td>-12.67</td><td>44.87</td><td>-11.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>625.47</td><td>34.28</td><td>46.00</td><td>-11.72</td><td>43.46</td><td>-9.18</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	44.52	36.89	40.00	-3.11	53.71	-16.82	Peak	---	---	2	79.23	37.54	40.00	-2.46	59.01	-21.47	Peak	---	---	3	96.54	35.70	43.50	-7.80	57.95	-22.25	Peak	---	---	4	191.61	36.24	43.50	-7.26	55.85	-19.61	Peak	---	---	5	500.35	33.33	46.00	-12.67	44.87	-11.54	Peak	---	---	6	625.47	34.28	46.00	-11.72	43.46	-9.18	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																						
1	44.52	36.89	40.00	-3.11	53.71	-16.82	Peak	---	---																																																																						
2	79.23	37.54	40.00	-2.46	59.01	-21.47	Peak	---	---																																																																						
3	96.54	35.70	43.50	-7.80	57.95	-22.25	Peak	---	---																																																																						
4	191.61	36.24	43.50	-7.26	55.85	-19.61	Peak	---	---																																																																						
5	500.35	33.33	46.00	-12.67	44.87	-11.54	Peak	---	---																																																																						
6	625.47	34.28	46.00	-11.72	43.46	-9.18	Peak	---	---																																																																						
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																															

Mode 2: Internal antenna with POE mode

Transmitter Radiated Unwanted Emissions																																																																															
Operating Mode	2				Polarization			H																																																																							
Operating Function	WLAN 2.4GHz HT20 CH6 + 5GHz VHT20 CH48																																																																														
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>59.43</td><td>29.62</td><td>40.00</td><td>-10.38</td><td>46.73</td><td>-17.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>79.84</td><td>30.17</td><td>40.00</td><td>-9.83</td><td>51.77</td><td>-21.60</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>196.75</td><td>27.88</td><td>43.50</td><td>-15.62</td><td>47.52</td><td>-19.64</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>375.31</td><td>31.56</td><td>46.00</td><td>-14.44</td><td>45.90</td><td>-14.34</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>500.45</td><td>34.94</td><td>46.00</td><td>-11.06</td><td>46.48</td><td>-11.54</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>625.34</td><td>34.27</td><td>46.00</td><td>-11.73</td><td>43.46</td><td>-9.19</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg	1	59.43	29.62	40.00	-10.38	46.73	-17.11	Peak	---	---	2	79.84	30.17	40.00	-9.83	51.77	-21.60	Peak	---	---	3	196.75	27.88	43.50	-15.62	47.52	-19.64	Peak	---	---	4	375.31	31.56	46.00	-14.44	45.90	-14.34	Peak	---	---	5	500.45	34.94	46.00	-11.06	46.48	-11.54	Peak	---	---	6	625.34	34.27	46.00	-11.73	43.46	-9.19	Peak	---	---
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																						
1	59.43	29.62	40.00	-10.38	46.73	-17.11	Peak	---	---																																																																						
2	79.84	30.17	40.00	-9.83	51.77	-21.60	Peak	---	---																																																																						
3	196.75	27.88	43.50	-15.62	47.52	-19.64	Peak	---	---																																																																						
4	375.31	31.56	46.00	-14.44	45.90	-14.34	Peak	---	---																																																																						
5	500.45	34.94	46.00	-11.06	46.48	-11.54	Peak	---	---																																																																						
6	625.34	34.27	46.00	-11.73	43.46	-9.19	Peak	---	---																																																																						
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																															

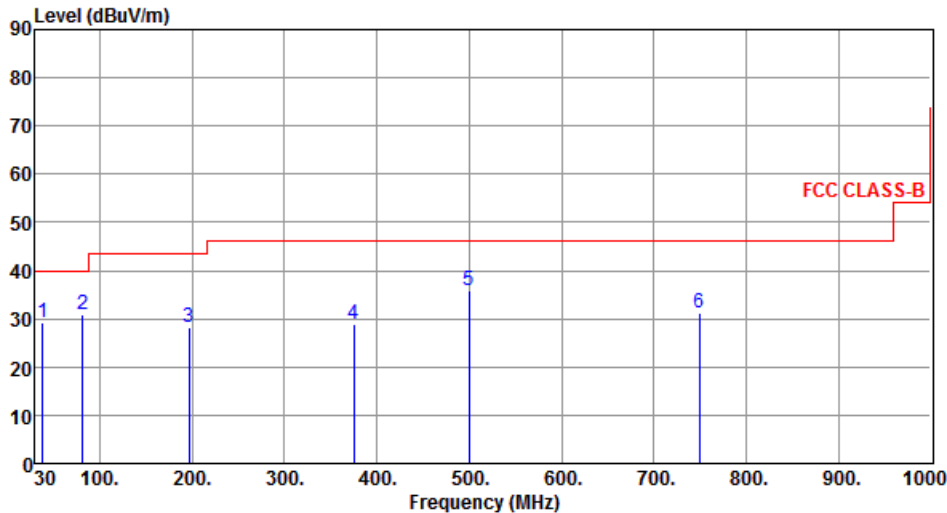
Transmitter Radiated Unwanted Emissions									
Operating Mode	2			Polarization			V		
Operating Function	WLAN 2.4GHz HT20 CH6 + 5GHz VHT20 CH48								
Level (dBuV/m)									

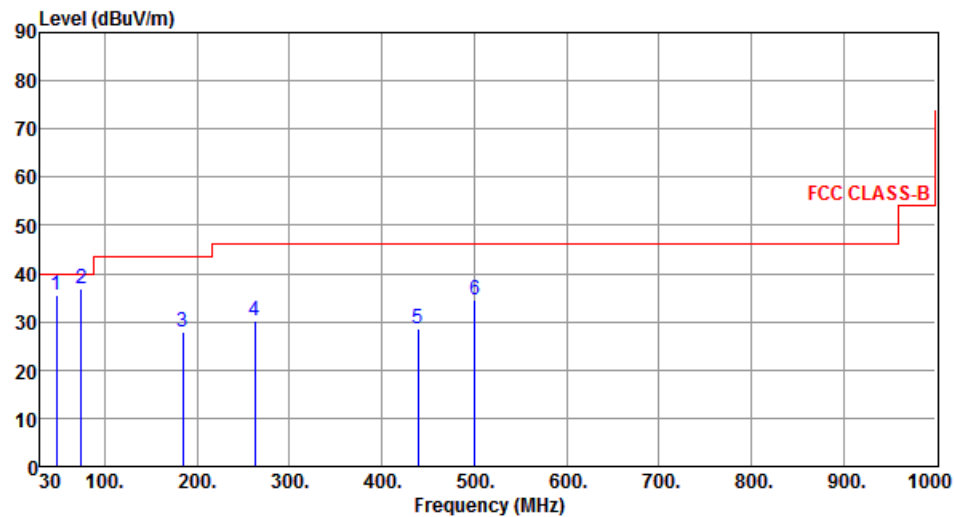
Mode 3: External antenna with adapter mode

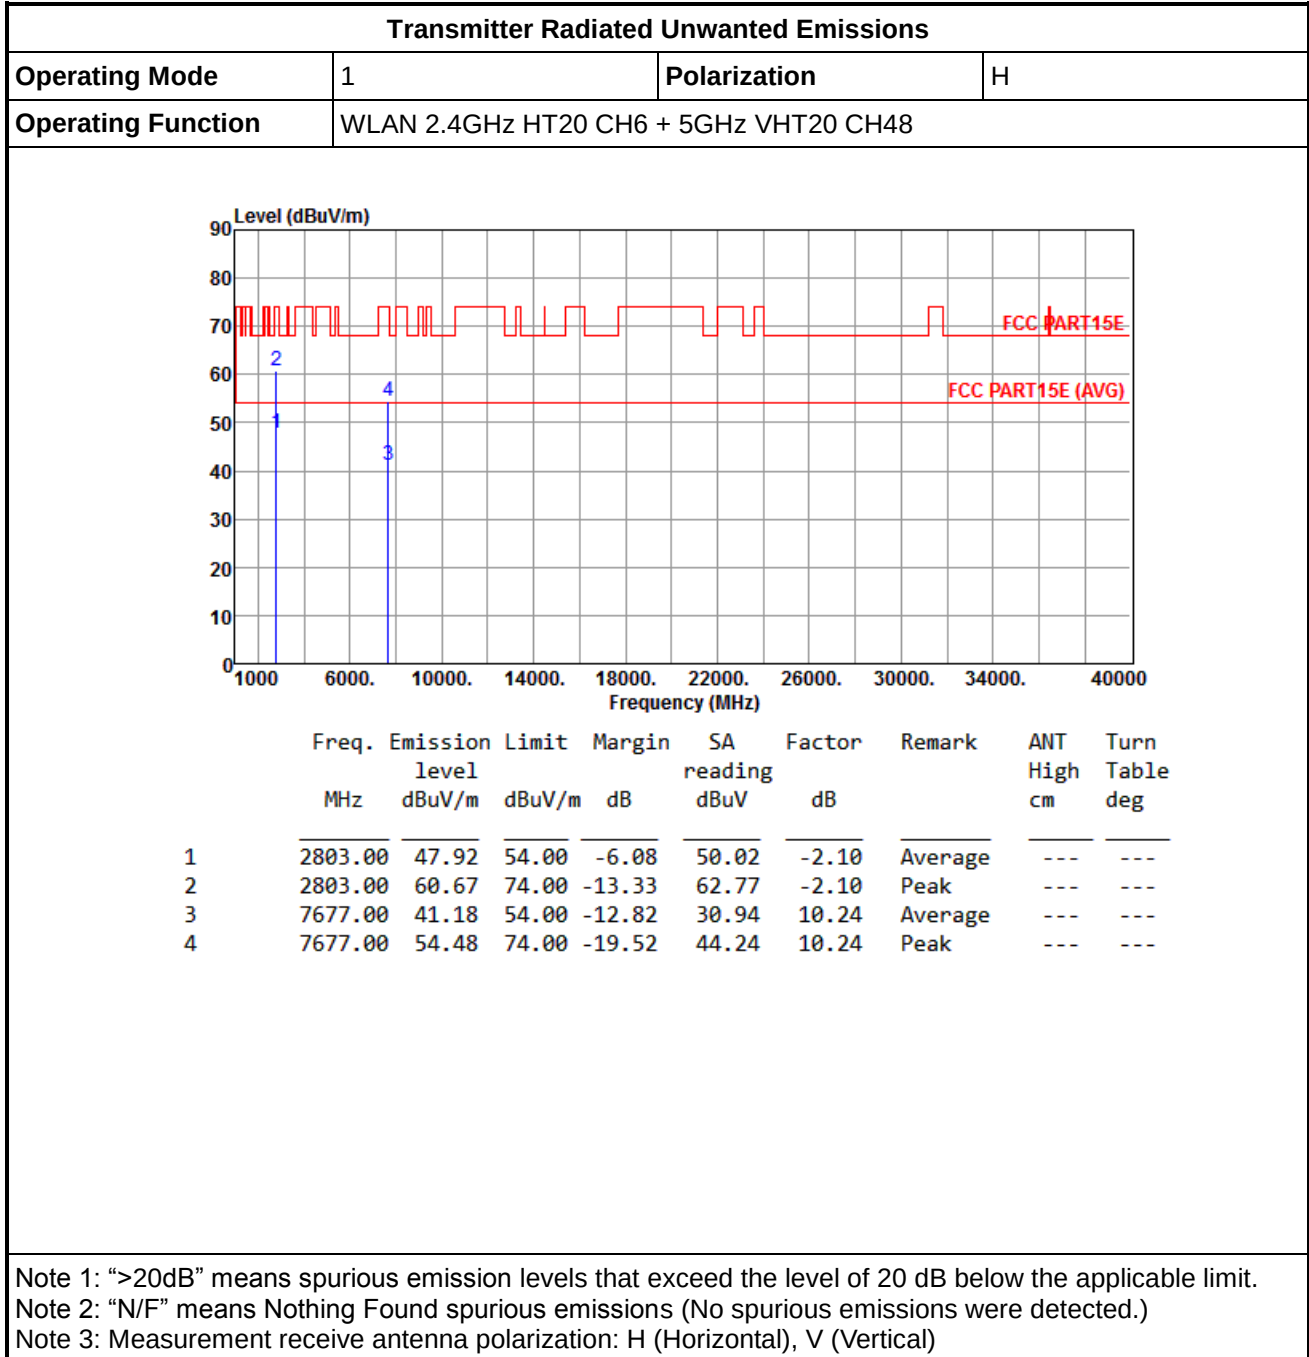
Transmitter Radiated Unwanted Emissions									
Operating Mode	3				Polarization		H		
Operating Function	WLAN 2.4GHz 11g CH6 + 5GHz 11a CH40								
Level (dBUV/m)									

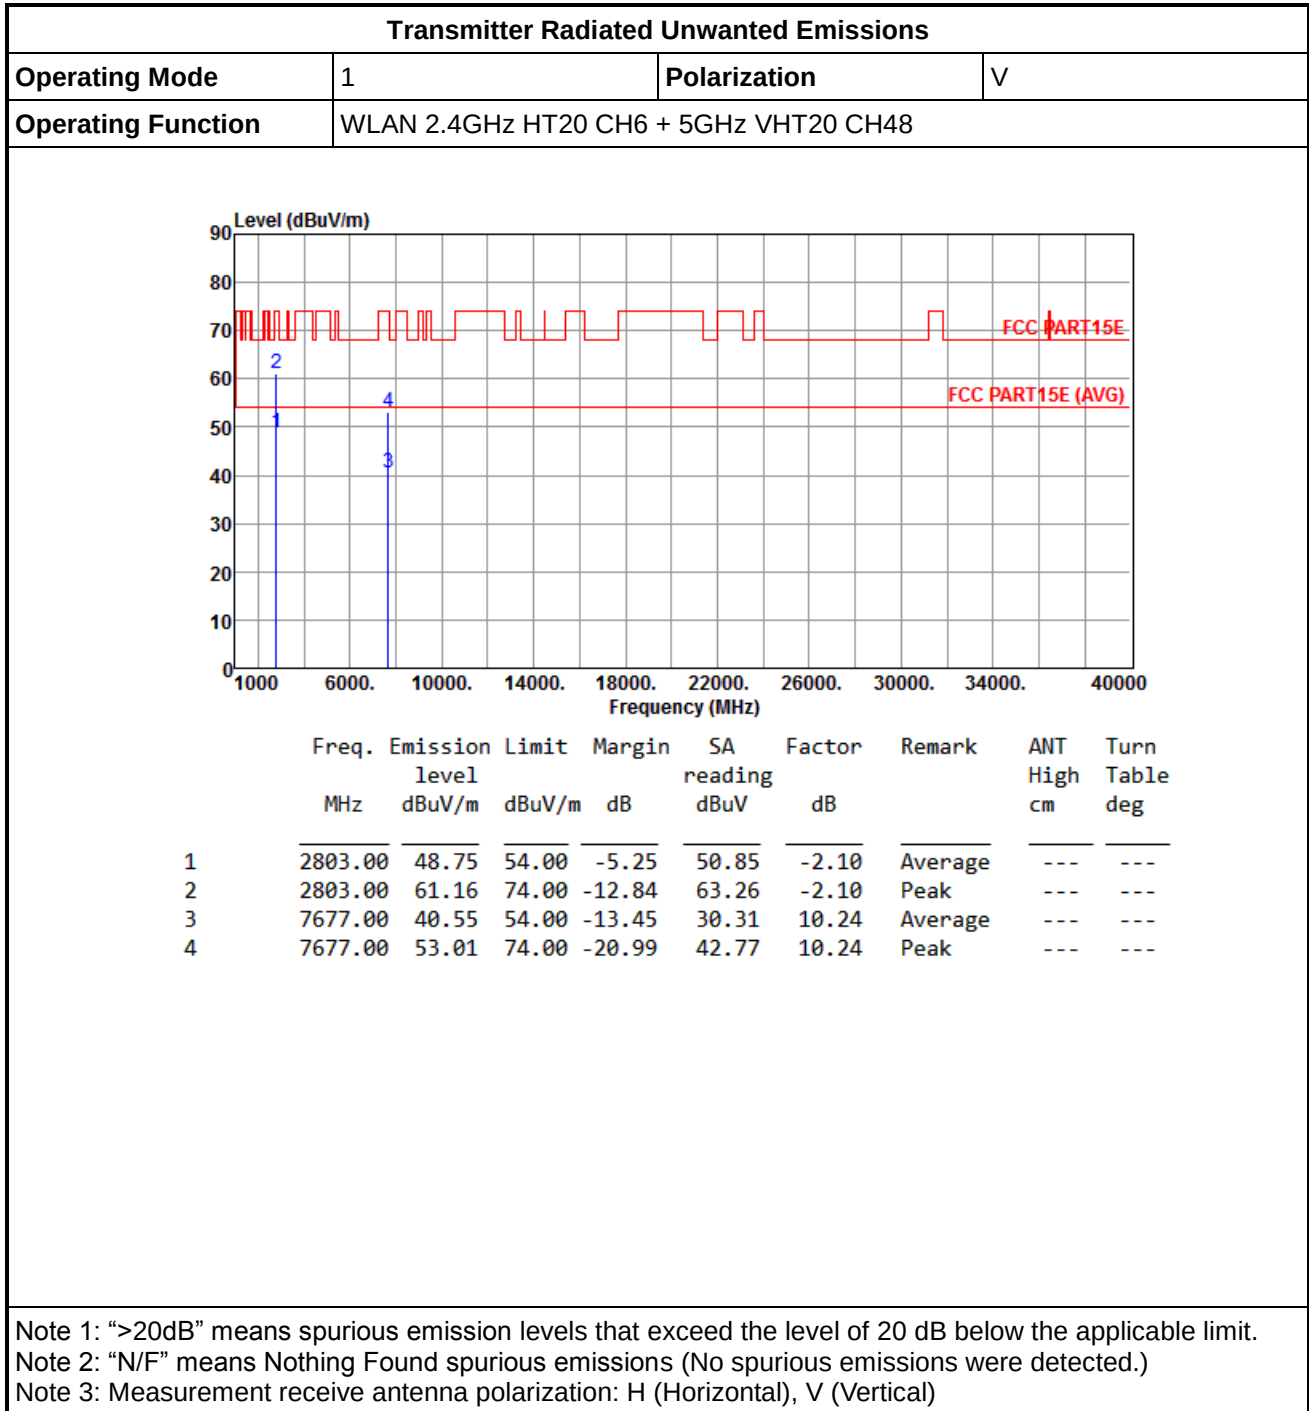
Transmitter Radiated Unwanted Emissions									
Operating Mode	3			Polarization			V		
Operating Function	WLAN 2.4GHz 11g CH6 + 5GHz 11a CH40								
Level (dBUV/m) <									

Mode 4: External antenna with POE mode

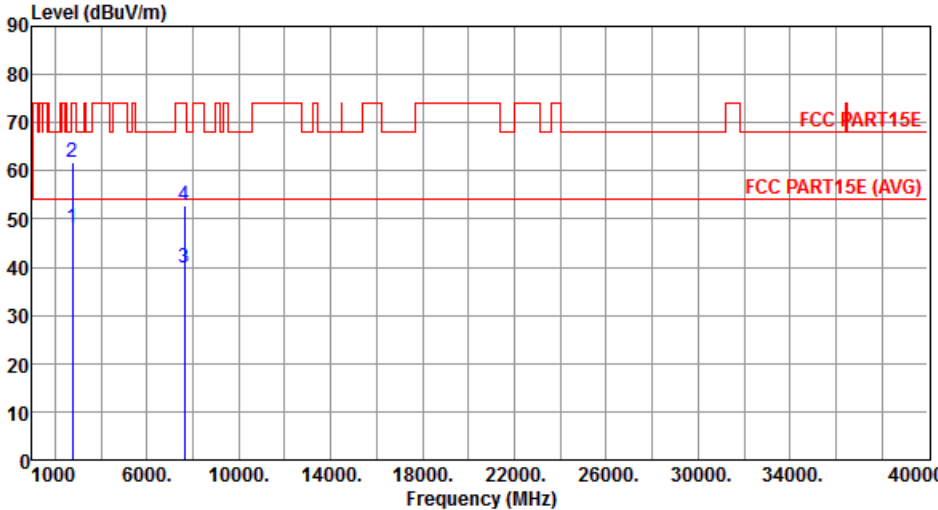
Transmitter Radiated Unwanted Emissions																																																																															
Operating Mode	4				Polarization		H																																																																								
Operating Function	WLAN 2.4GHz 11g CH6 + 5GHz 11a CH40																																																																														
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>37.73</td><td>29.17</td><td>40.00</td><td>-10.83</td><td>46.39</td><td>-17.22</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>81.56</td><td>30.90</td><td>40.00</td><td>-9.10</td><td>52.75</td><td>-21.85</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>196.47</td><td>28.14</td><td>43.50</td><td>-15.36</td><td>47.77</td><td>-19.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>375.29</td><td>28.99</td><td>46.00</td><td>-17.01</td><td>43.33</td><td>-14.34</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>500.26</td><td>35.97</td><td>46.00</td><td>-10.03</td><td>47.52</td><td>-11.55</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>749.14</td><td>31.36</td><td>46.00</td><td>-14.64</td><td>38.61</td><td>-7.25</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	37.73	29.17	40.00	-10.83	46.39	-17.22	Peak	---	---	2	81.56	30.90	40.00	-9.10	52.75	-21.85	Peak	---	---	3	196.47	28.14	43.50	-15.36	47.77	-19.63	Peak	---	---	4	375.29	28.99	46.00	-17.01	43.33	-14.34	Peak	---	---	5	500.26	35.97	46.00	-10.03	47.52	-11.55	Peak	---	---	6	749.14	31.36	46.00	-14.64	38.61	-7.25	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																						
1	37.73	29.17	40.00	-10.83	46.39	-17.22	Peak	---	---																																																																						
2	81.56	30.90	40.00	-9.10	52.75	-21.85	Peak	---	---																																																																						
3	196.47	28.14	43.50	-15.36	47.77	-19.63	Peak	---	---																																																																						
4	375.29	28.99	46.00	-17.01	43.33	-14.34	Peak	---	---																																																																						
5	500.26	35.97	46.00	-10.03	47.52	-11.55	Peak	---	---																																																																						
6	749.14	31.36	46.00	-14.64	38.61	-7.25	Peak	---	---																																																																						
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																															

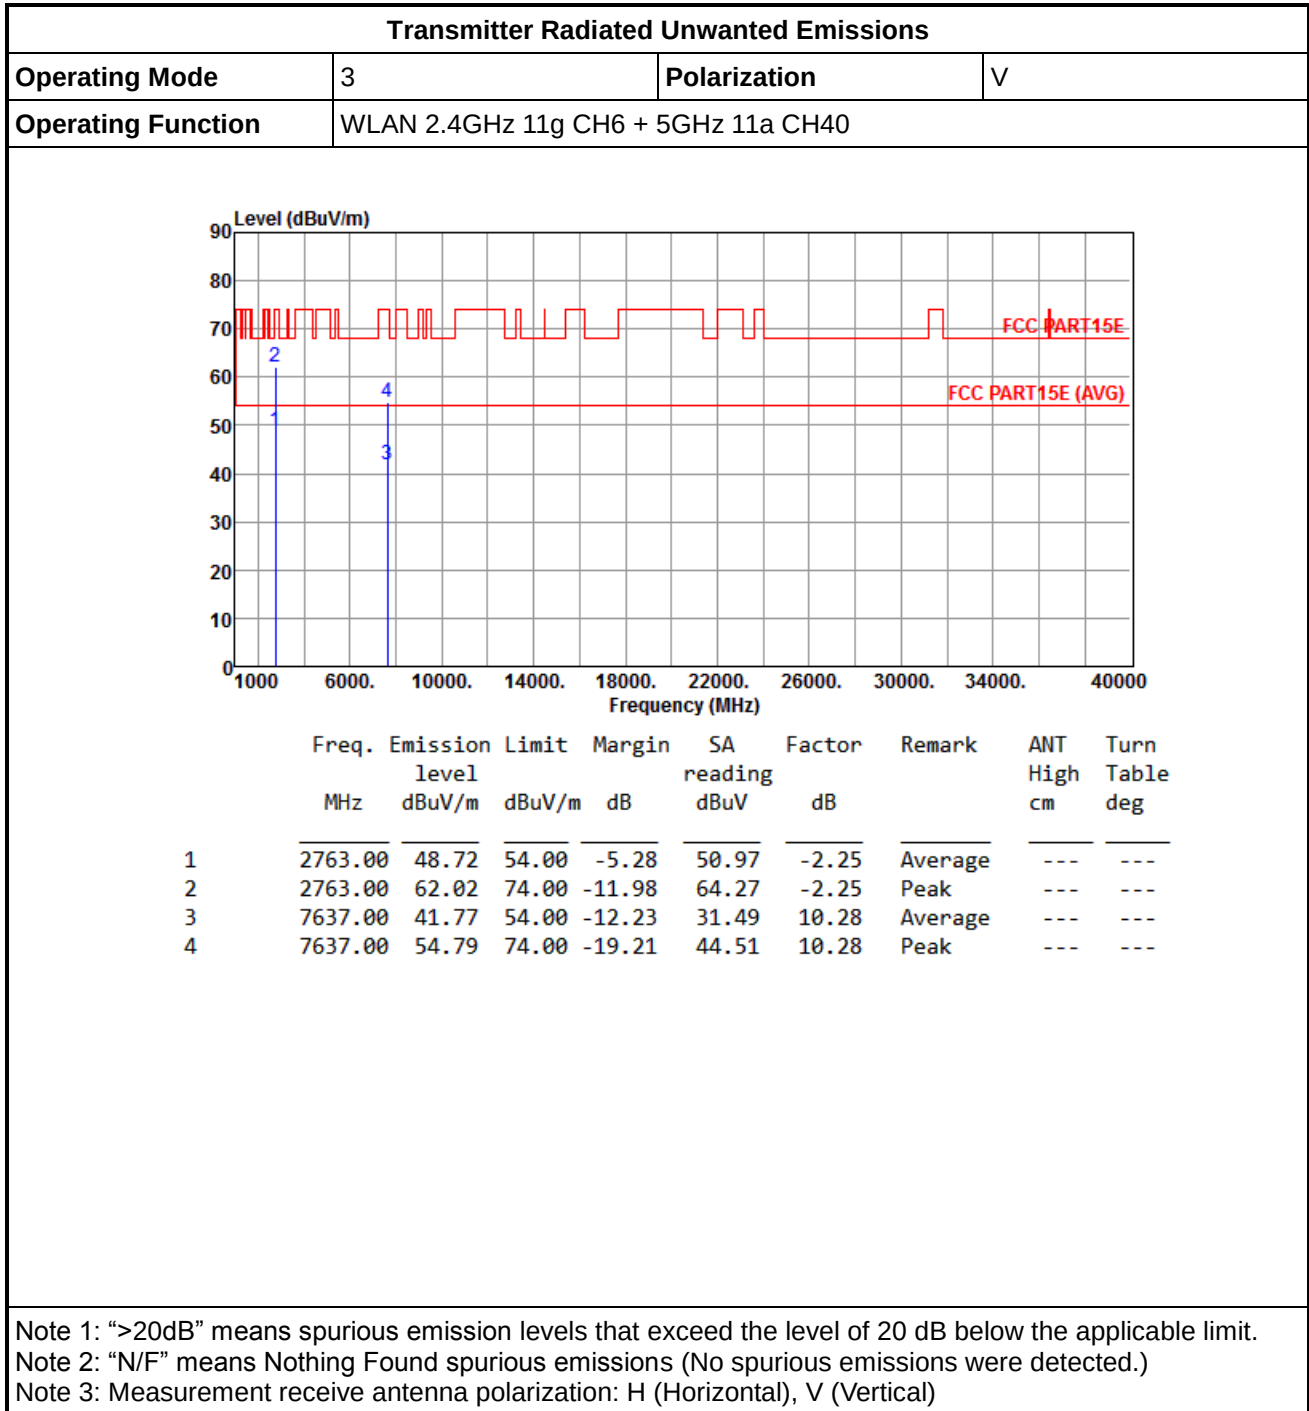
Transmitter Radiated Unwanted Emissions																																																																															
Operating Mode	4				Polarization			V																																																																							
Operating Function	WLAN 2.4GHz 11g CH6 + 5GHz 11a CH40																																																																														
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>47.58</td><td>35.55</td><td>40.00</td><td>-4.45</td><td>52.20</td><td>-16.65</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>74.54</td><td>36.89</td><td>40.00</td><td>-3.11</td><td>57.34</td><td>-20.45</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>184.58</td><td>27.93</td><td>43.50</td><td>-15.57</td><td>46.94</td><td>-19.01</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>262.75</td><td>30.37</td><td>46.00</td><td>-15.63</td><td>47.84</td><td>-17.47</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>439.18</td><td>28.69</td><td>46.00</td><td>-17.31</td><td>41.46</td><td>-12.77</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>500.37</td><td>34.58</td><td>46.00</td><td>-11.42</td><td>46.12</td><td>-11.54</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	47.58	35.55	40.00	-4.45	52.20	-16.65	Peak	---	---	2	74.54	36.89	40.00	-3.11	57.34	-20.45	Peak	---	---	3	184.58	27.93	43.50	-15.57	46.94	-19.01	Peak	---	---	4	262.75	30.37	46.00	-15.63	47.84	-17.47	Peak	---	---	5	439.18	28.69	46.00	-17.31	41.46	-12.77	Peak	---	---	6	500.37	34.58	46.00	-11.42	46.12	-11.54	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																						
1	47.58	35.55	40.00	-4.45	52.20	-16.65	Peak	---	---																																																																						
2	74.54	36.89	40.00	-3.11	57.34	-20.45	Peak	---	---																																																																						
3	184.58	27.93	43.50	-15.57	46.94	-19.01	Peak	---	---																																																																						
4	262.75	30.37	46.00	-15.63	47.84	-17.47	Peak	---	---																																																																						
5	439.18	28.69	46.00	-17.31	41.46	-12.77	Peak	---	---																																																																						
6	500.37	34.58	46.00	-11.42	46.12	-11.54	Peak	---	---																																																																						
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																																															

1.1.7 Results for Radiated Emissions (Above 1GHz)
Mode 1: Internal antenna with adapter mode




Mode 3: External antenna with adapter mode

Transmitter Radiated Unwanted Emissions																																																											
Operating Mode	3			Polarization			H																																																				
Operating Function	WLAN 2.4GHz 11g CH6 + 5GHz 11a CH40																																																										
 <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>2763.00</td><td>48.28</td><td>54.00</td><td>-5.72</td><td>50.53</td><td>-2.25</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>2</td><td>2763.00</td><td>61.65</td><td>74.00</td><td>-12.35</td><td>63.90</td><td>-2.25</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>7637.00</td><td>39.75</td><td>54.00</td><td>-14.25</td><td>29.47</td><td>10.28</td><td>Average</td><td>---</td><td>---</td></tr><tr><td>4</td><td>7637.00</td><td>52.79</td><td>74.00</td><td>-21.21</td><td>42.51</td><td>10.28</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	2763.00	48.28	54.00	-5.72	50.53	-2.25	Average	---	---	2	2763.00	61.65	74.00	-12.35	63.90	-2.25	Peak	---	---	3	7637.00	39.75	54.00	-14.25	29.47	10.28	Average	---	---	4	7637.00	52.79	74.00	-21.21	42.51	10.28	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																		
1	2763.00	48.28	54.00	-5.72	50.53	-2.25	Average	---	---																																																		
2	2763.00	61.65	74.00	-12.35	63.90	-2.25	Peak	---	---																																																		
3	7637.00	39.75	54.00	-14.25	29.47	10.28	Average	---	---																																																		
4	7637.00	52.79	74.00	-21.21	42.51	10.28	Peak	---	---																																																		
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)																																																											



2 TEST EQUIPMENT AND CALIBRATION DATA

Test Item	Radiated Emissions				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014
Note: Calibration Interval of instruments listed above is one year.					

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014
Note: Calibration Interval of instruments listed above is two year.					