

Date: 2026-02-14

01_WCDMA II_RMC 12.2Kbps_Left Side_10mm_Ch9400

Communication System: UMTS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260214 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.306 W/kg; SAR (10g) = 0.169 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.275 W/kg; SAR (10g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 89.1 %

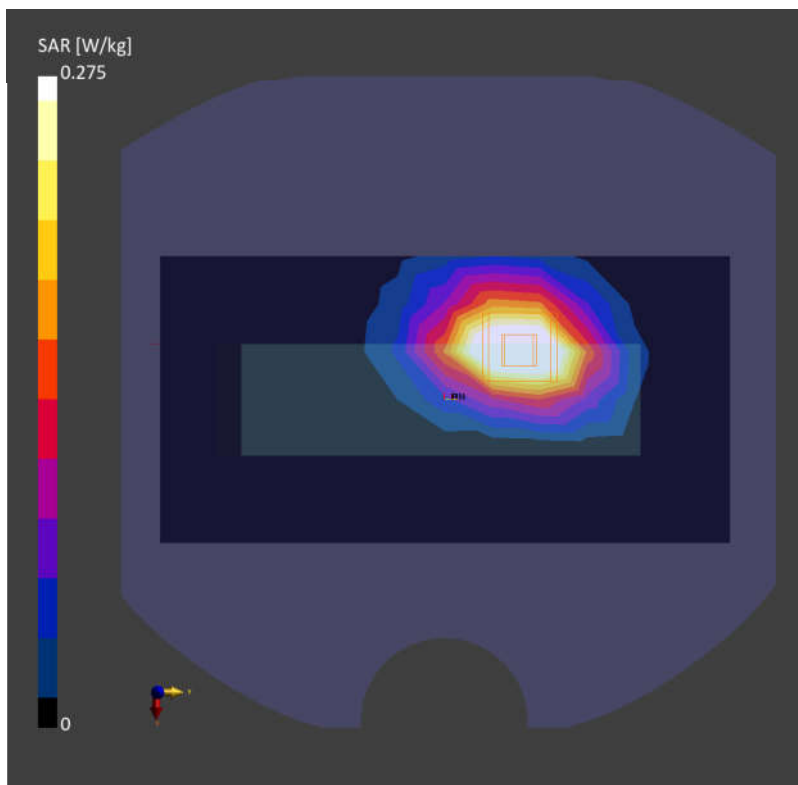

Date: 2026-02-13

02_WCDMA IV_RMC 12.2Kbps_Left Side_10mm_Ch1413

Communication System: UMTS-FDD

Frequency: 1732.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260213 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.297 W/kg; SAR (10g) = 0.169 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.311 W/kg; SAR (10g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 89.1 %

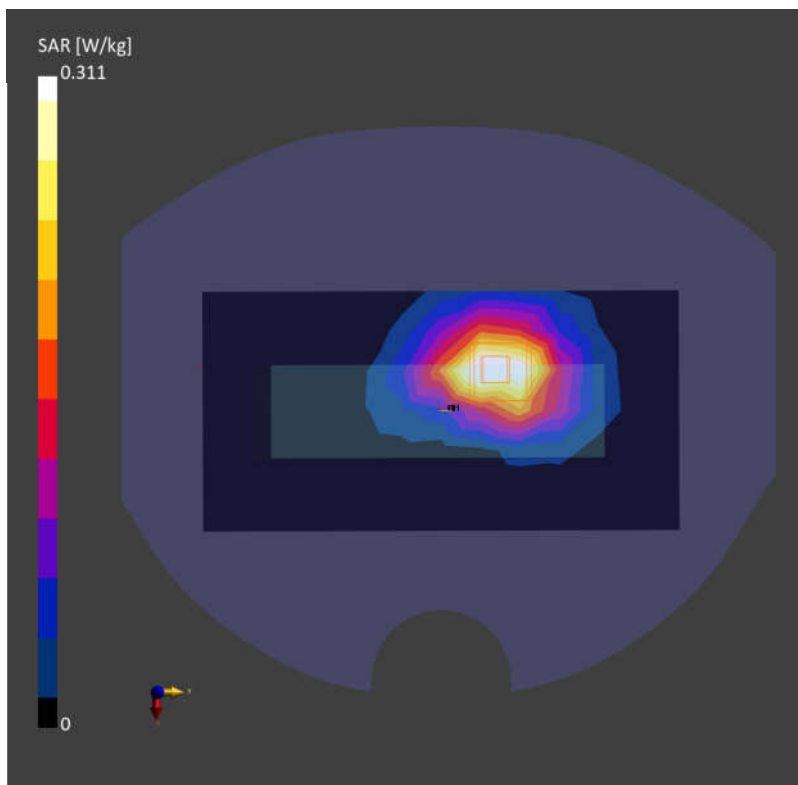

Date: 2026-02-12

03_WCDMA V_RMC 12.2Kbps_Left Side_10mm_Ch4182

Communication System: UMTS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:1

Medium: HSL_835_260212 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.301 W/kg; SAR (10g) = 0.197 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.307 W/kg; SAR (10g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 16.8 mm

Ratio of SAR at M2 to SAR at M1 = 90.0 %

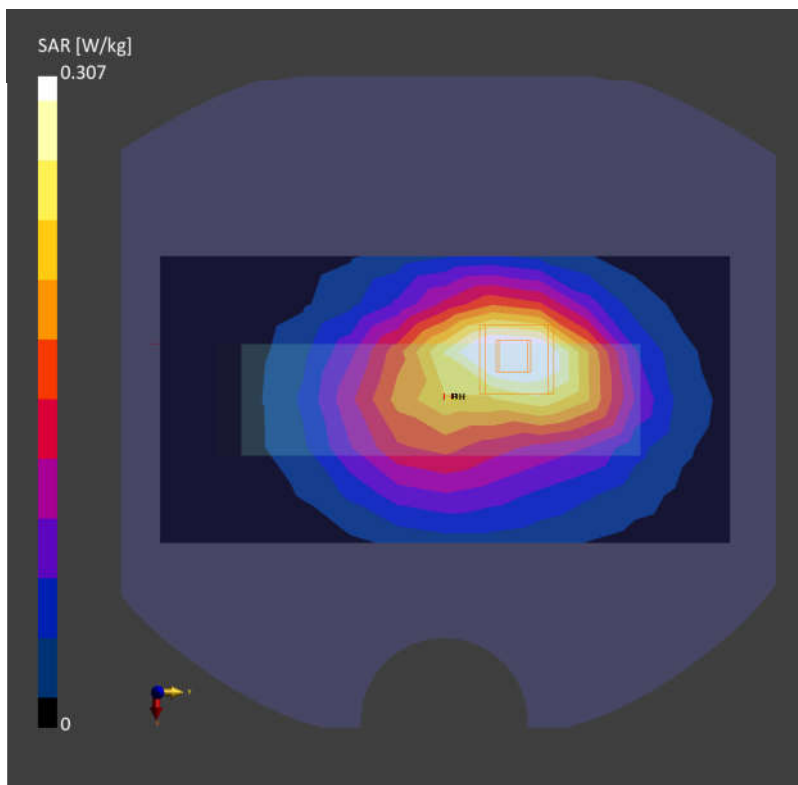

Date: 2026-02-16

04_LTE Band 7_20M_QPSK_1_0_Left Side_10mm_Ch21100

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260216 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.269 W/kg; SAR (10g) = 0.145 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

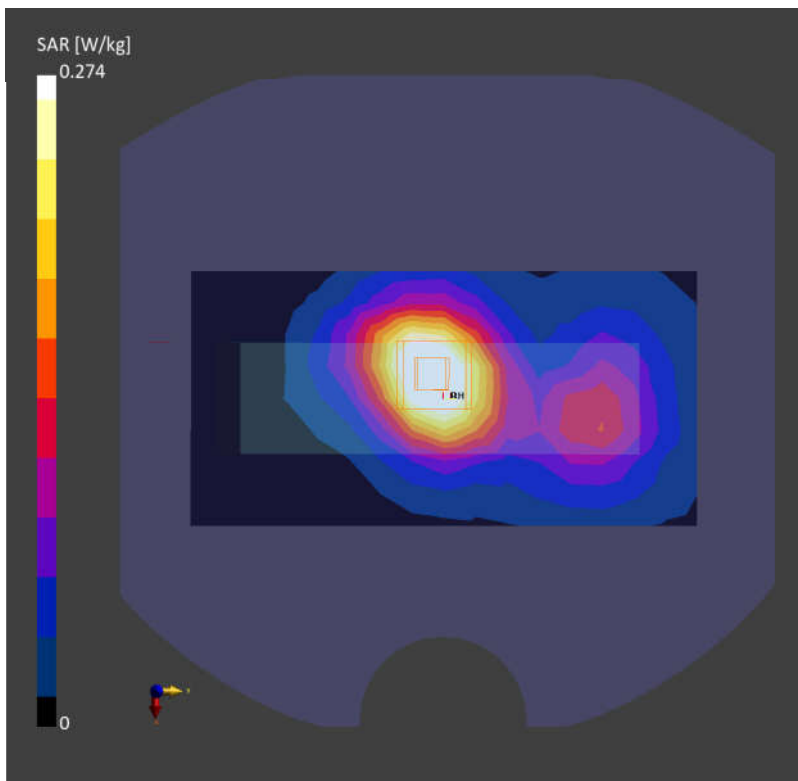

Date: 2026-03-04

05_LTE Band 12_10M_QPSK_1_0_Left Side_10mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f=707.500$ MHz; $\sigma=0.882$ S/m; $\epsilon_r=43.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.150 W/kg; SAR (10g) = 0.097 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.154 W/kg; SAR (10g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 14.6 mm

Ratio of SAR at M2 to SAR at M1 = 84.9 %

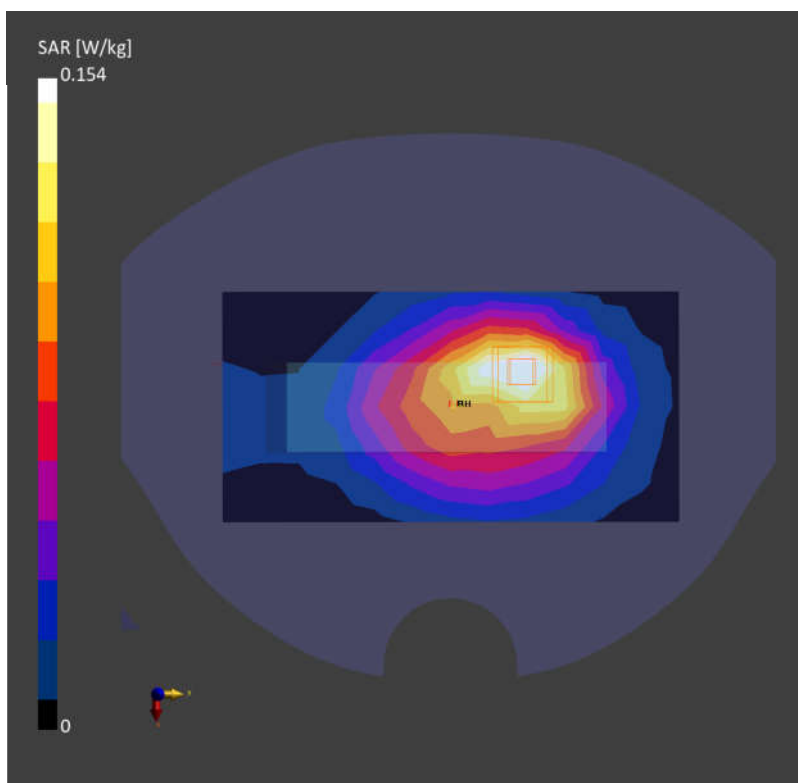

Date: 2026-03-04

06_LTE Band 13_10M_QPSK_1_0_Left Side_10mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f=782.000$ MHz; $\sigma=0.902$ S/m; $\epsilon_r=42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.170 W/kg; SAR (10g) = 0.109 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.177 W/kg; SAR (10g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

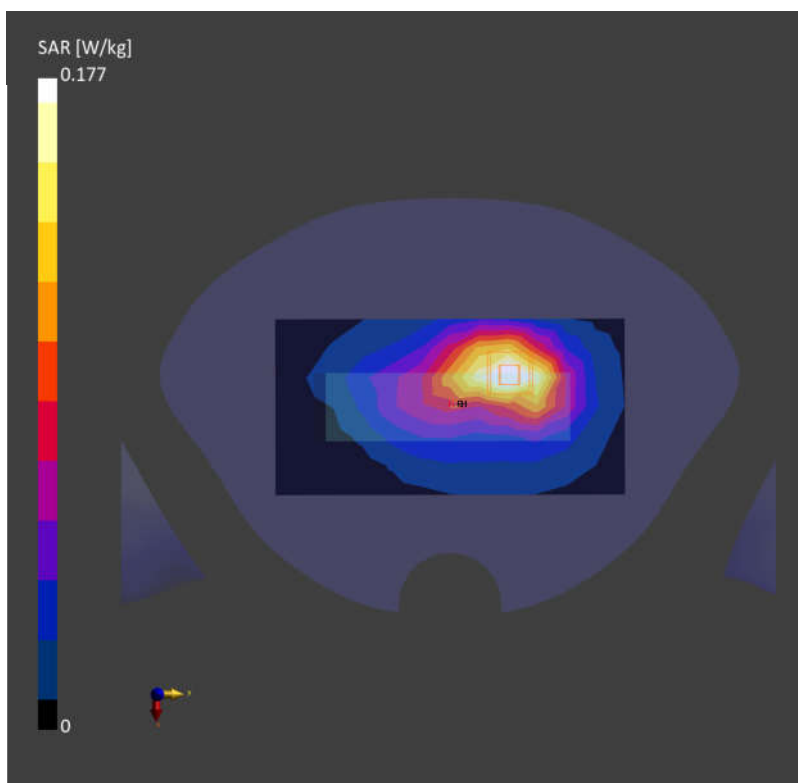

Date: 2026-02-14

07_LTE Band 25_20M_QPSK_1_0_Back_10mm_Ch26340

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260214 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.268 W/kg; SAR (10g) = 0.158 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.295 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

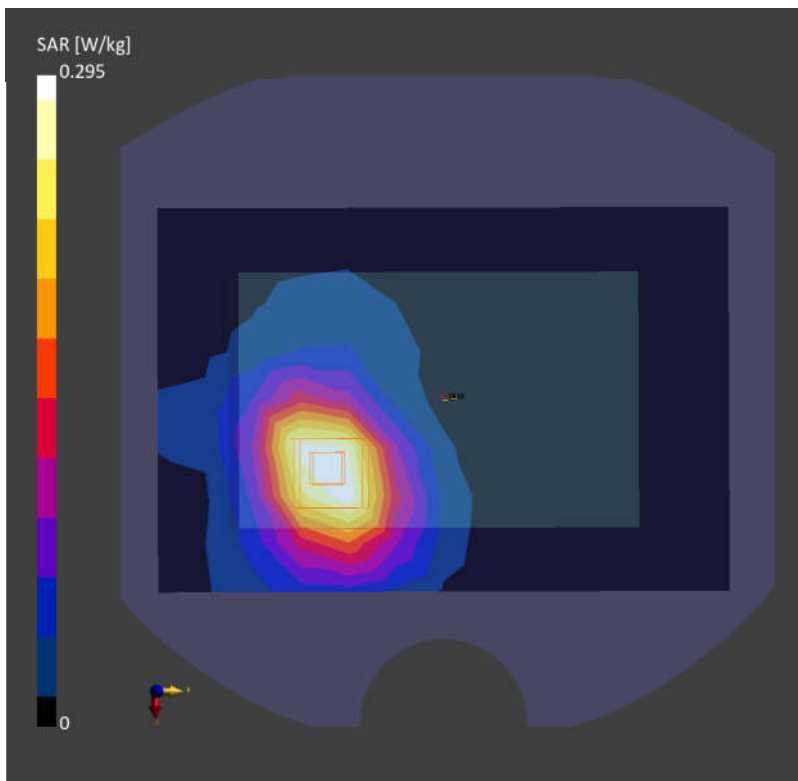

Date: 2026-02-12

08_LTE Band 26_15M_QPSK_1_0_Left Side_10mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_260212 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.160 W/kg; SAR (10g) = 0.103 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.167 W/kg; SAR (10g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.9 %

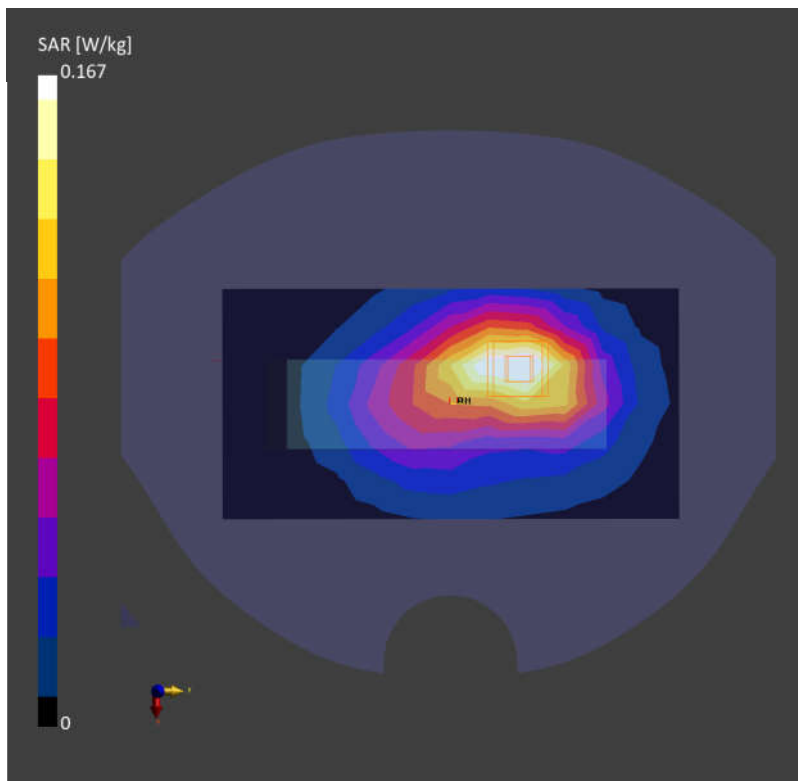

Date: 2026-02-15

09_LTE Band 30_10M_QPSK_1_0_Back_10mm_Ch27710

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_260215 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.328 W/kg; SAR (10g) = 0.180 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.337 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.9 %

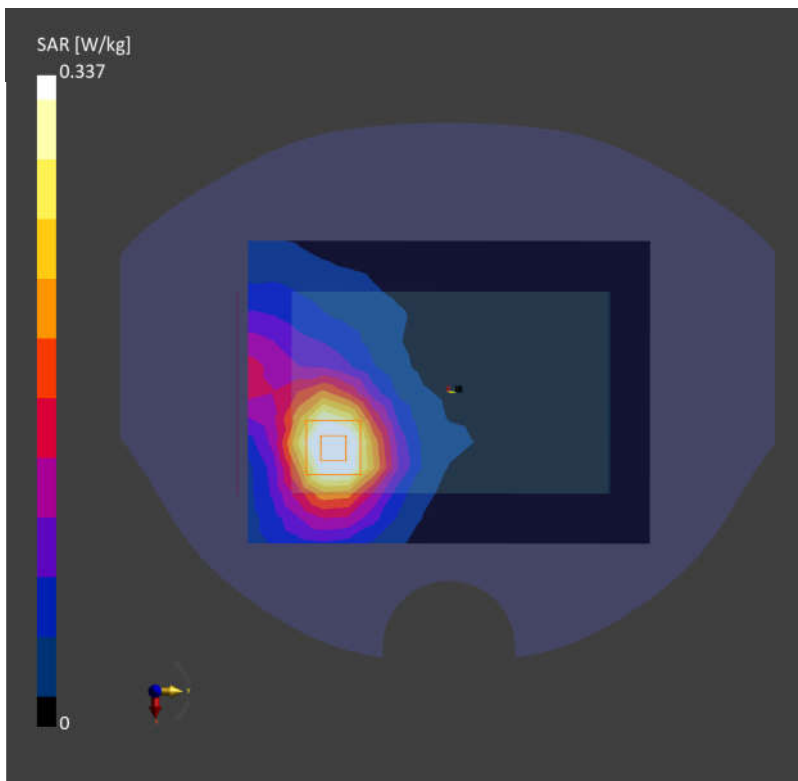

Date: 2026-02-13

10_LTE Band 66_20M_QPSK_1_0_Left Side_10mm_Ch132322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260213 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.301 W/kg; SAR (10g) = 0.176 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.306 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

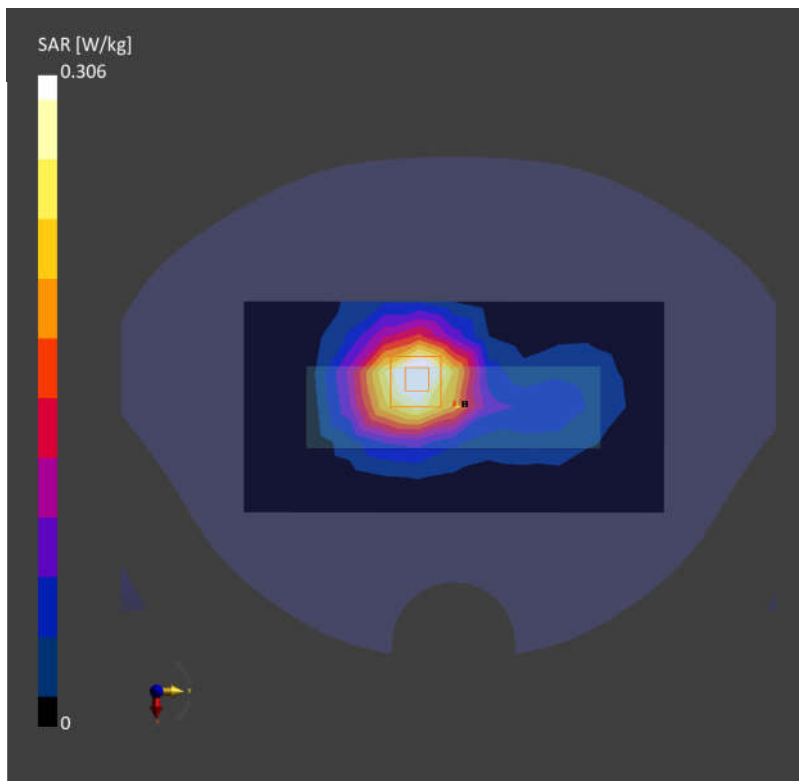

Date: 2026-03-04

11_LTE Band 71_20M_QPSK_1_0_Left Side_10mm_Ch133297

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f=680.500$ MHz; $\sigma=0.865$ S/m; $\epsilon_r=43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.199 W/kg; SAR (10g) = 0.130 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

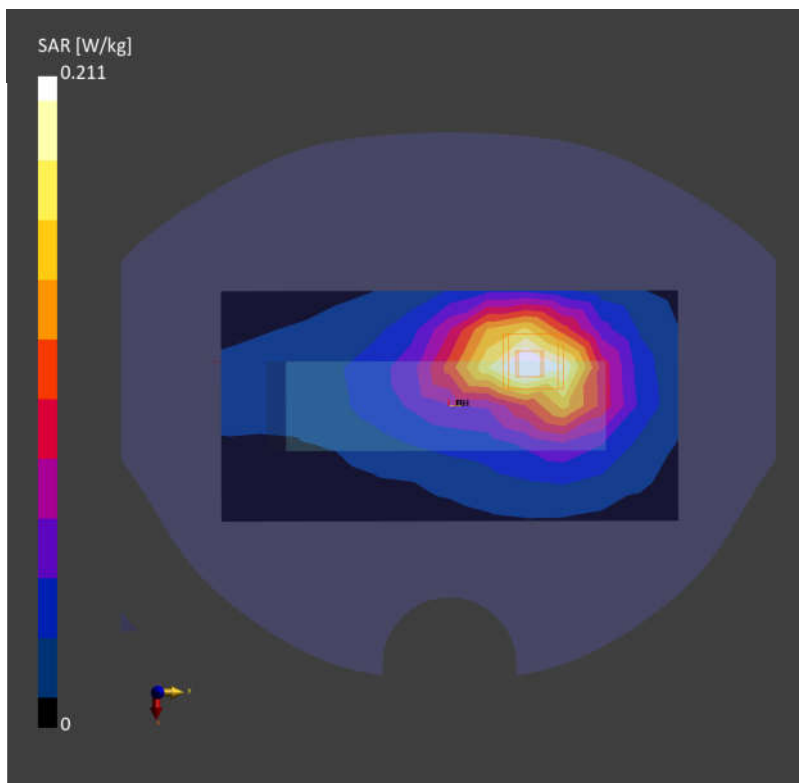

Date: 2026-02-16

12_LTE Band 41_20M_QPSK_1_0_Back_10mm_Ch40620

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2593.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_260216 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.300 W/kg; SAR (10g) = 0.160 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.294 W/kg; SAR (10g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

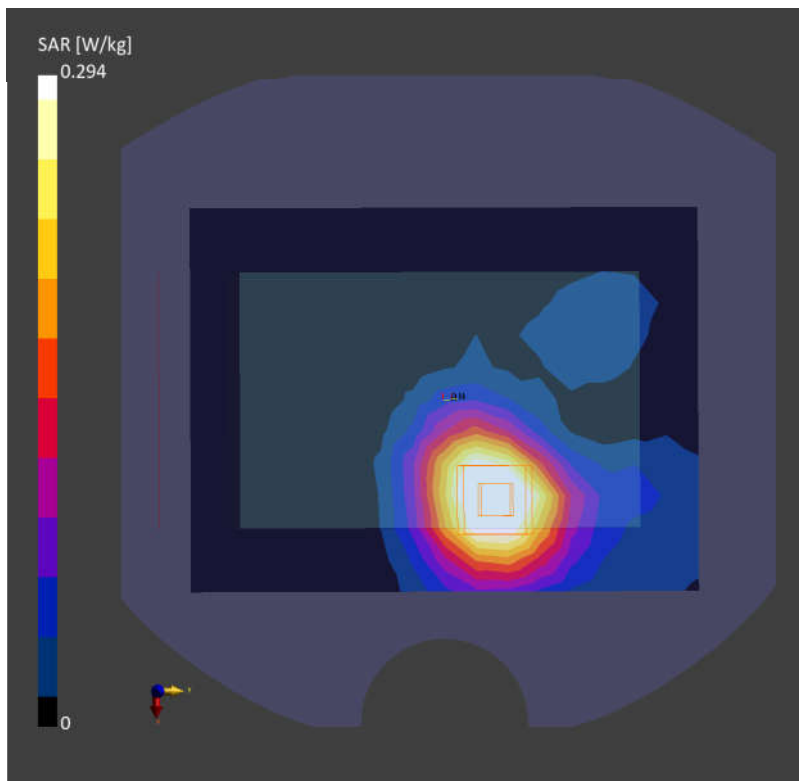

Date: 2026-02-18

13_LTE Band 42_20M_QPSK_50_0_Left Side_10mm_Ch42590

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3500.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_260218 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.62, 6.07, 5.74); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.269 W/kg; SAR (10g) = 0.136 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.14 dB

SAR (1g) = 0.278 W/kg; SAR (10g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

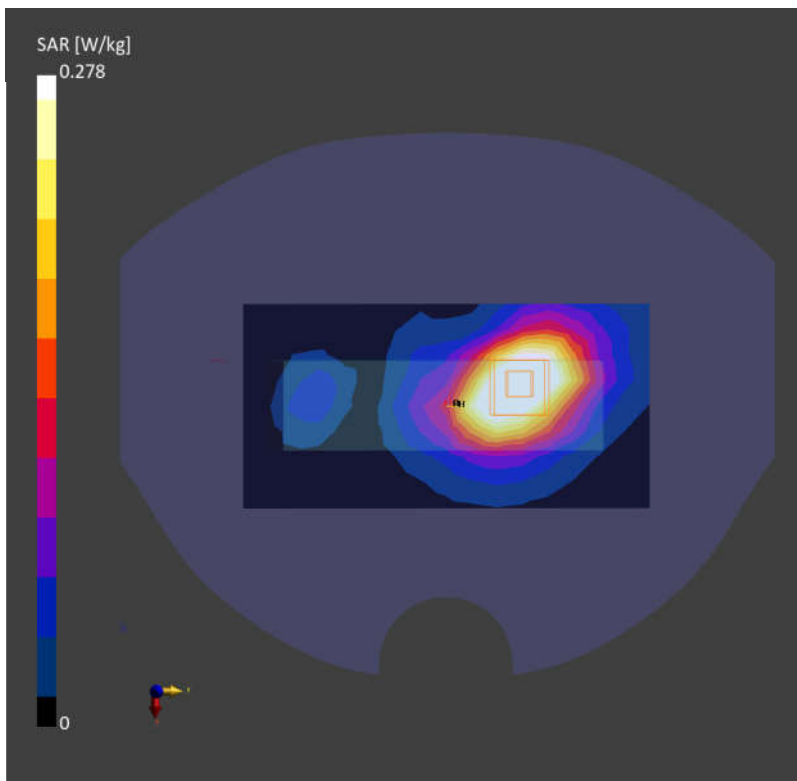

Date: 2026-02-19

14_LTE Band 48_20M_QPSK_1_0_Left Side_10mm_Ch55990

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3625.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3700_260219 Medium parameters used: $f = 3625.000$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.308 W/kg; SAR (10g) = 0.149 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 17.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

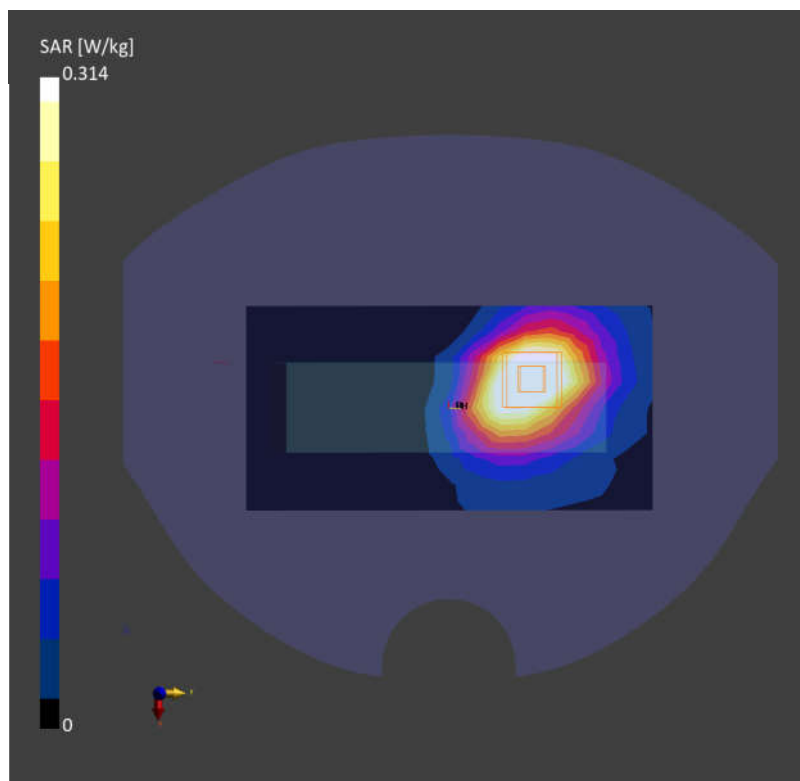

Date: 2026-02-16

15_FR1 n7_20M_BPSK_1_1_Left Side_10mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260216 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.336 W/kg; SAR (10g) = 0.171 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.344 W/kg; SAR (10g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

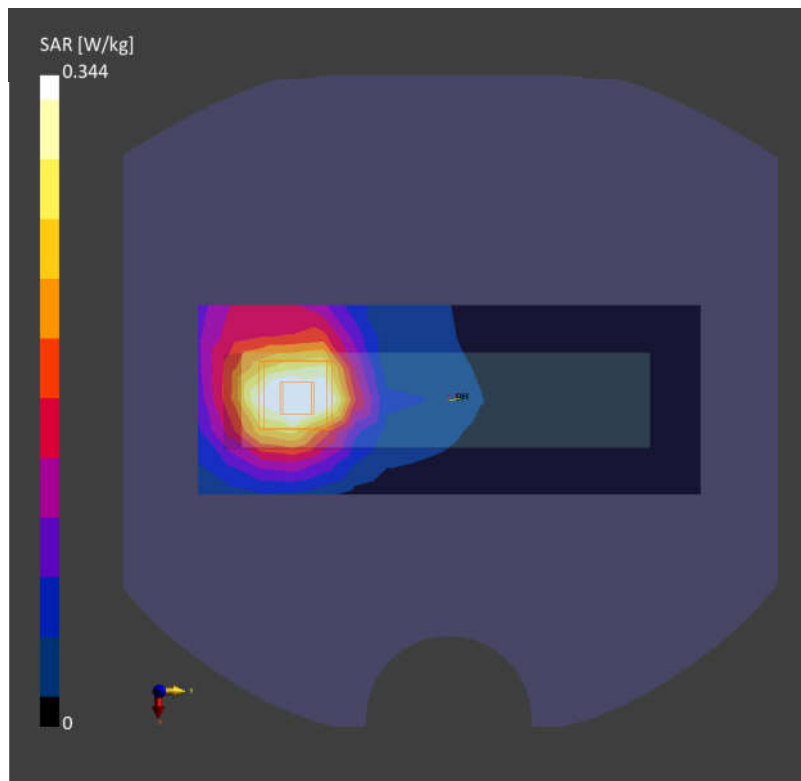

Date: 2026-03-04

16_FR1 n12_15M_BPSK_1_1_Left Side_10mm_Ch141500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f=707.500$ MHz; $\sigma=0.882$ S/m; $\epsilon_r=43.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.280 W/kg; SAR (10g) = 0.183 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.291 W/kg; SAR (10g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

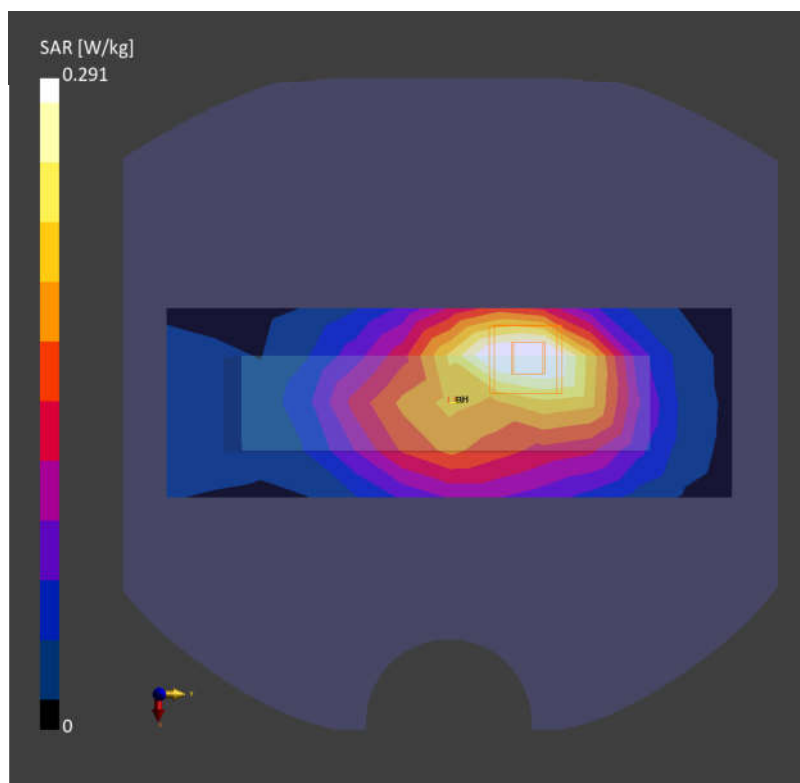

Date: 2026-03-04

17_FR1 n13_10M_BPSK_1_1_Left Side_10mm_Ch156400

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f=782.000$ MHz; $\sigma=0.902$ S/m; $\epsilon_r=42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.292 W/kg; SAR (10g) = 0.186 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.296 W/kg; SAR (10g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

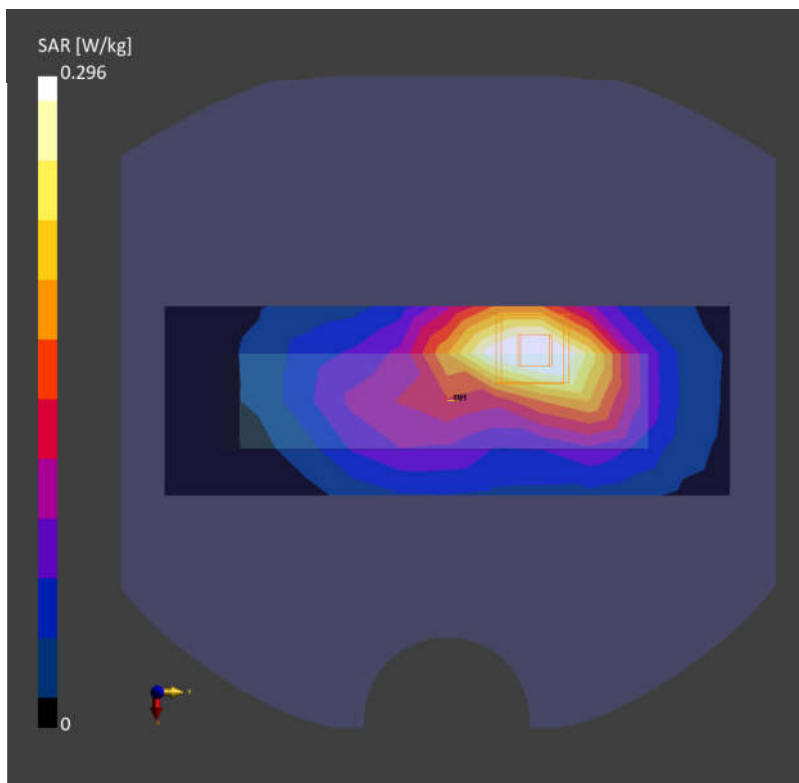

Date: 2026-02-14

18_FR1 n25_30M_BPSK_1_1_Back_10mm_Ch376500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260214 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.160 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.301 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.6 %

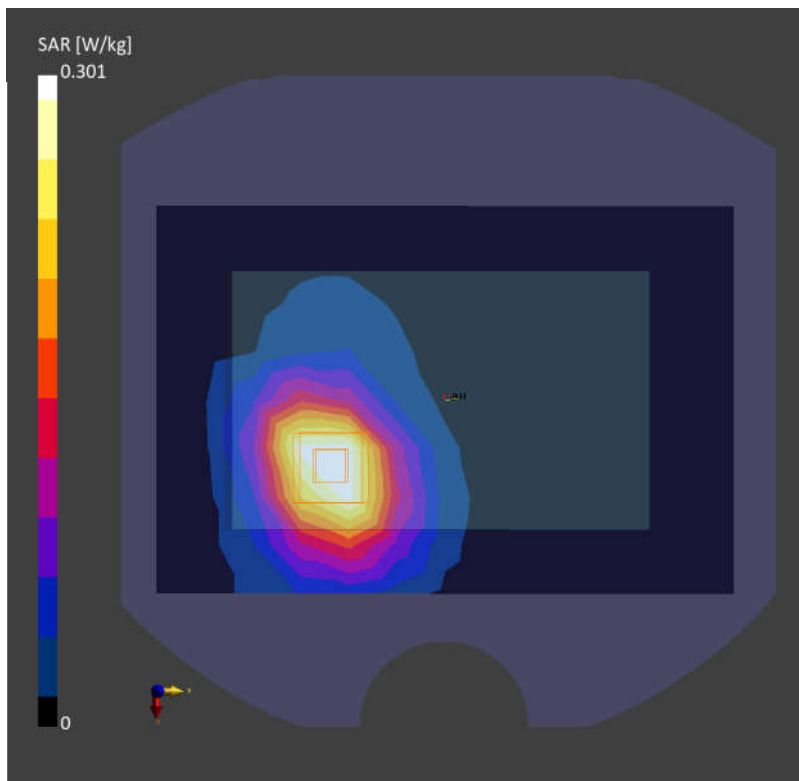

Date: 2026-02-12

19_FR1 n26_20M_BPSK_1_1_Left Side_10mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_260212 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (90.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.278 W/kg; SAR (10g) = 0.180 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.288 W/kg; SAR (10g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 88.8 %

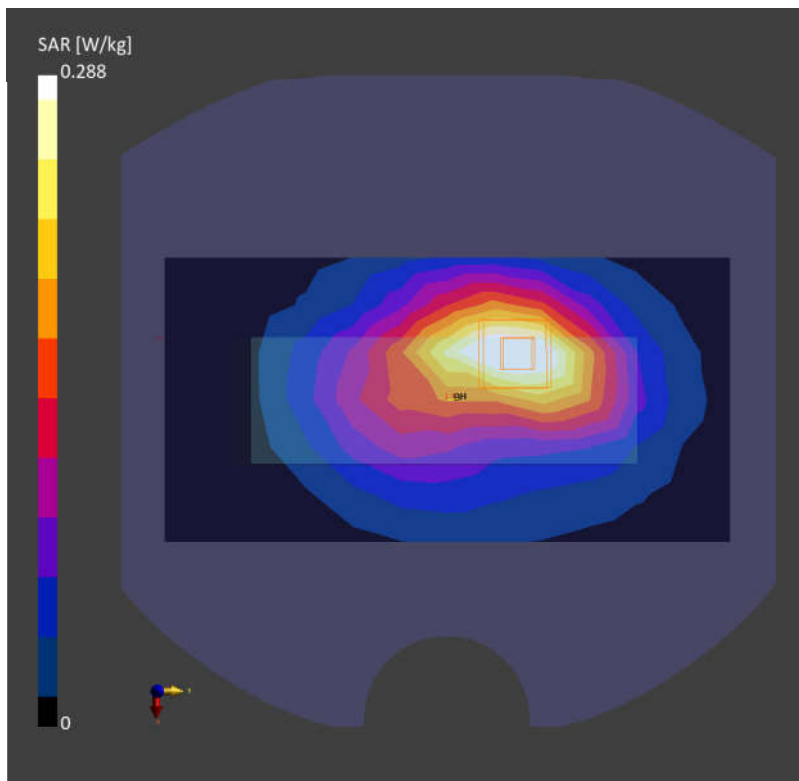

Date: 2026-02-15

20_FR1 n30_10M_BPSK_25_14_Back_10mm_Ch462000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_260215 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.170 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 87.0 %

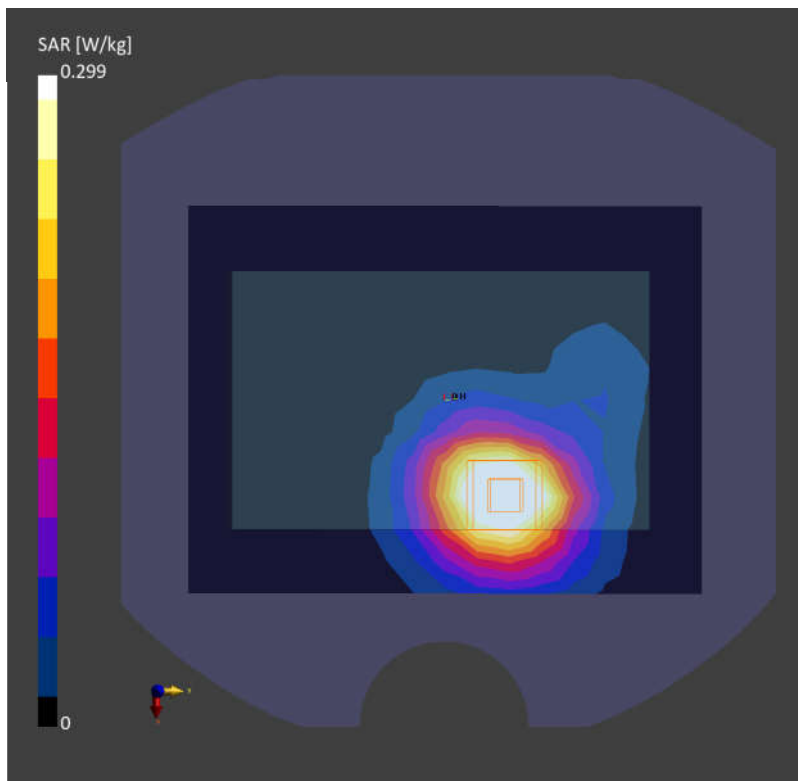

Date: 2026-02-13

21_FR1 n66_30M_BPSK_1_1_Left Side_10mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260213 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.199 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.366 W/kg; SAR (10g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

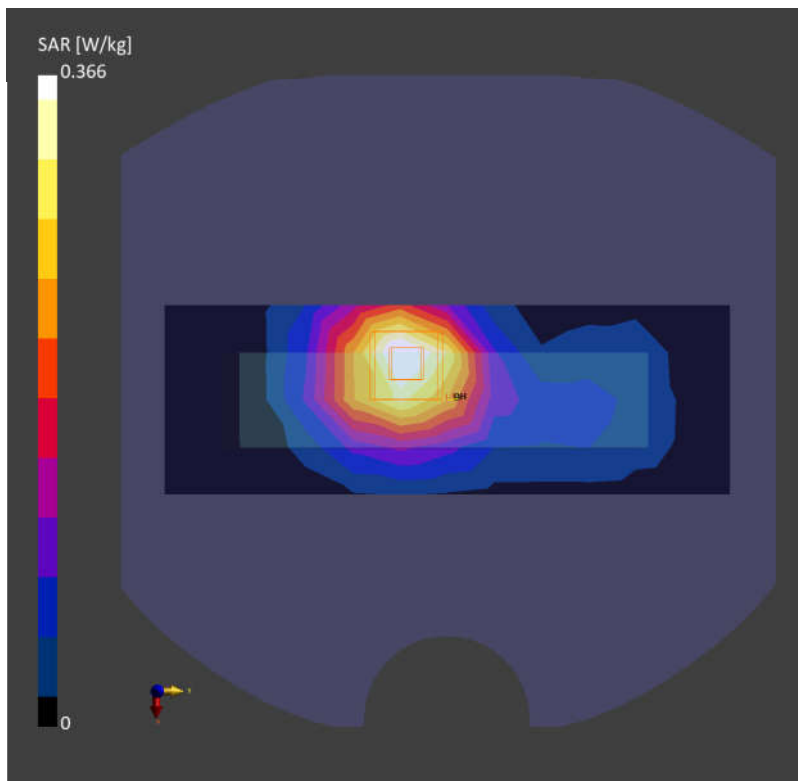

Date: 2026-03-04

22_FR1 n71_20M_BPSK_1_1_Left Side_10mm_Ch136100

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f=680.500$ MHz; $\sigma=0.865$ S/m; $\epsilon_r=43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.243 W/kg; SAR (10g) = 0.158 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.251 W/kg; SAR (10g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.5 %

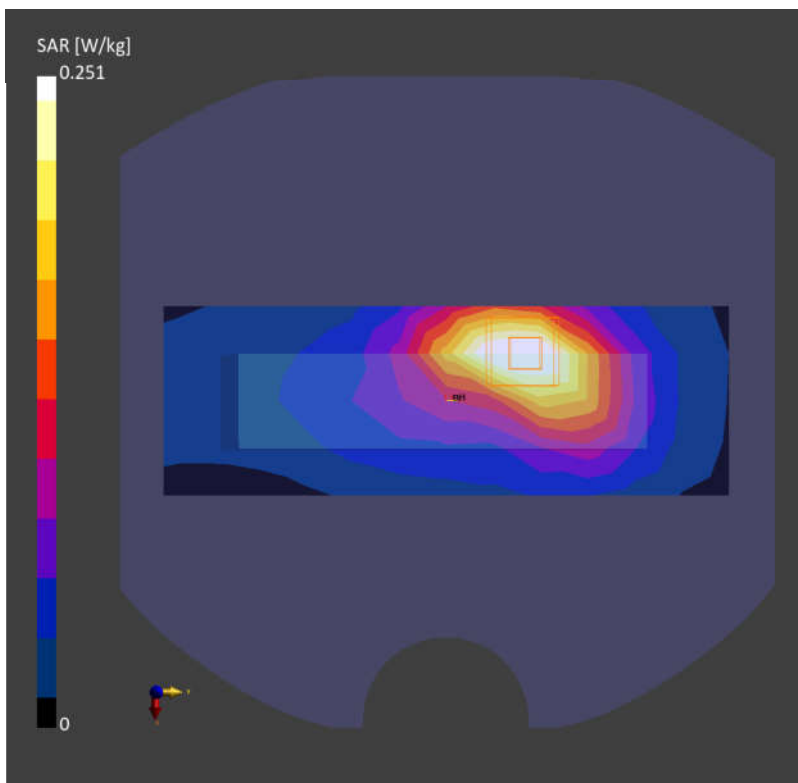

Date: 2026-02-16

23_FR1 n41_HPUE_100M_BPSK_1_1_Left Side_10mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260216 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.332 W/kg; SAR (10g) = 0.174 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.339 W/kg; SAR (10g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

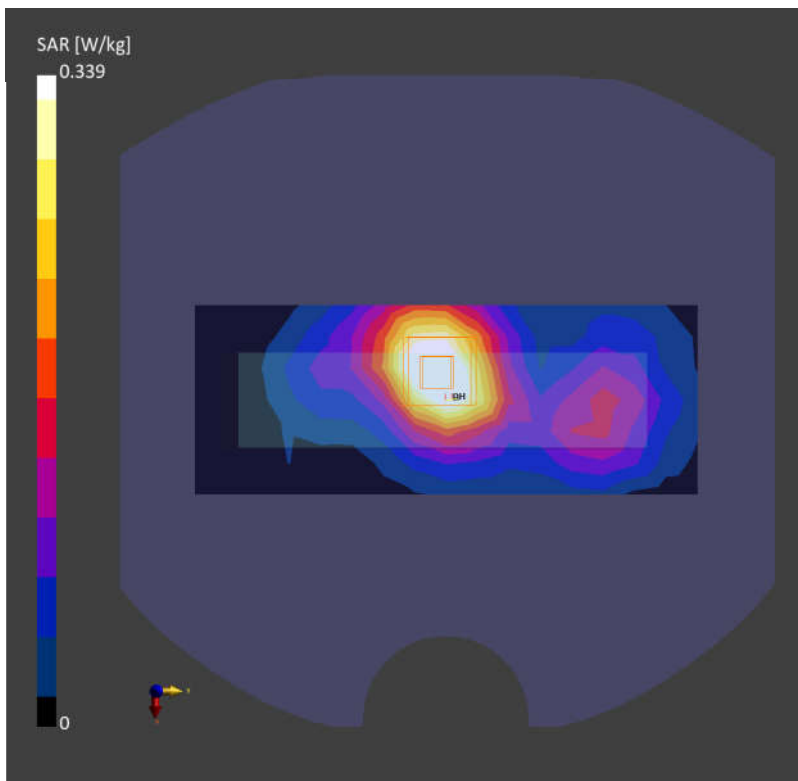

Date: 2026-02-19

24_FR1 n48_40M_BPSK_50_28_Left Side_10mm_Ch641666

Communication System: 5G NR

ntennaCfg:SISO; Frequency: 3624.990 MHz; Duty Cycle: 1:1

Medium: HSL_3700_260219 Medium parameters used: $f = 3624.990$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.152 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.18 dB

SAR (1g) = 0.328 W/kg; SAR (10g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

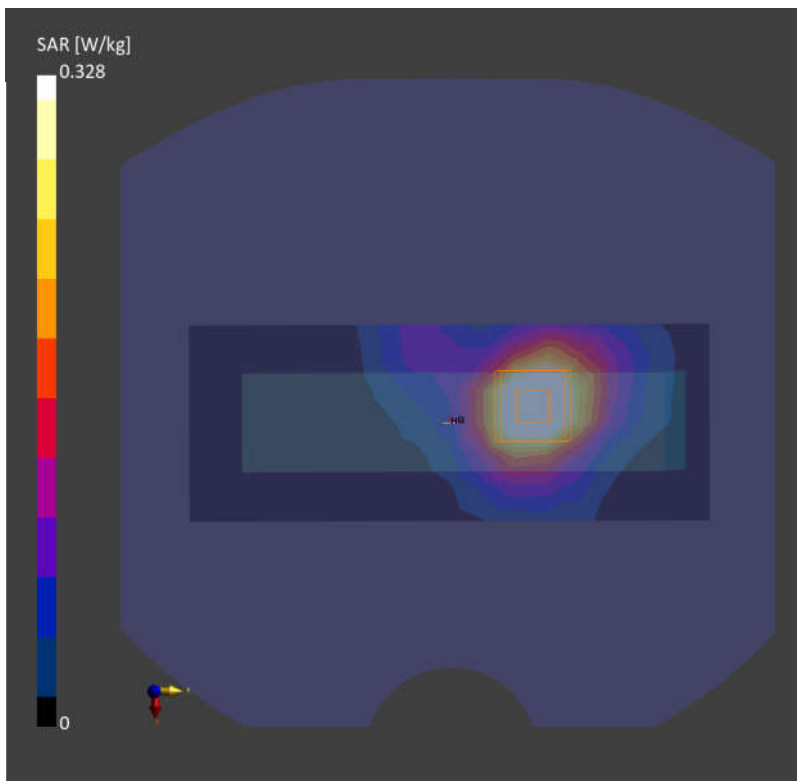

Date: 2026-02-20

25_FR1 n77_HPUE_100M_BPSK_1_1_Let Side_10mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_260220 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.33$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 5.93, 5.62); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.183 W/kg; SAR (10g) = 0.108 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.174 W/kg; SAR (10g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.2 %

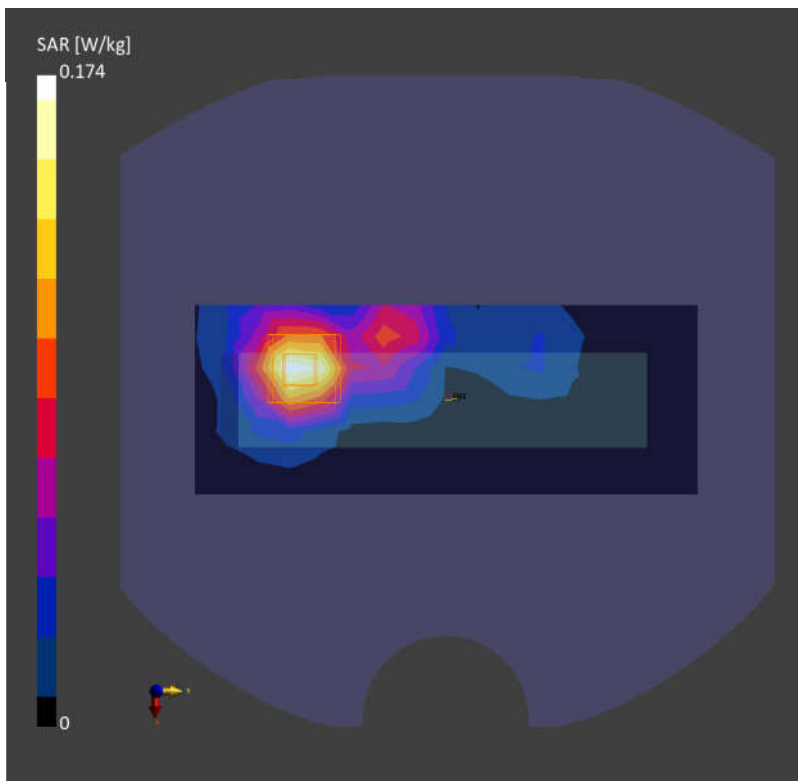

Date: 2026-02-20

26_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2437.000 MHz; Duty Cycle: 1:1

Medium: HSL_2450_260220 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.116 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.224 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

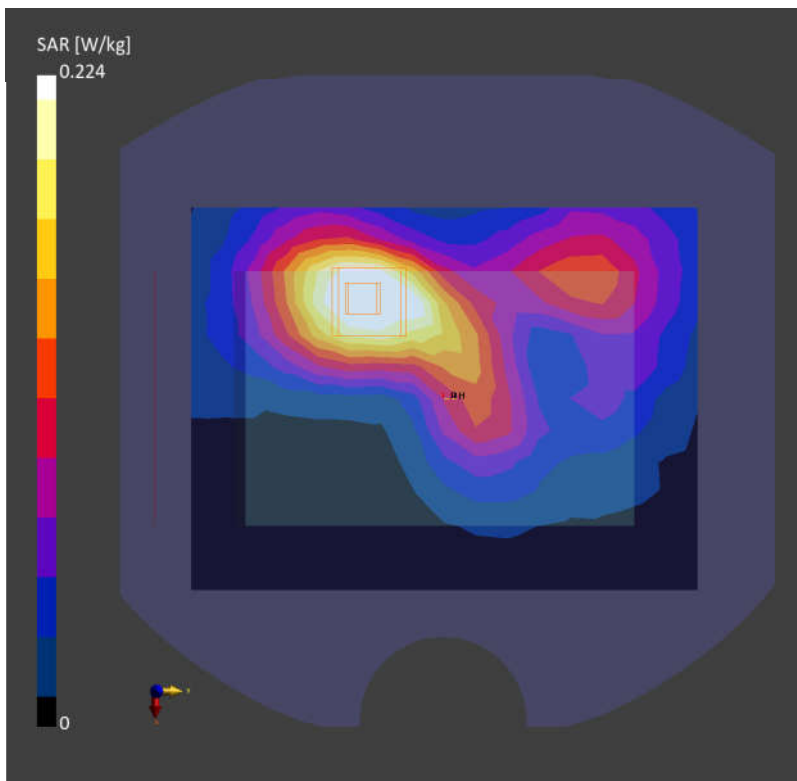

Date: 2026-02-20

27_Bluetooth_1Mbps_Right Side_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.304

Medium: HSL_2450_260220 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.005 W/kg; SAR (10g) = 0.002 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.005 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.2 %

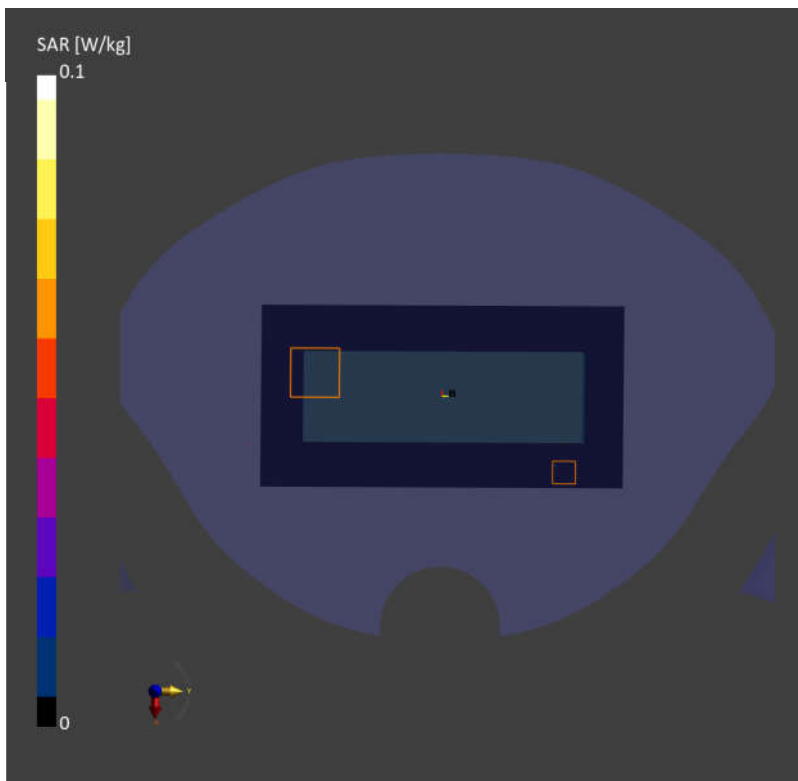

Date: 2026-02-14

28_WCDMA II_RMC 12.2Kbps_Back_10mm_Ch9400

Communication System: UMTS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260214 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.210 W/kg; SAR (10g) = 0.120 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.218 W/kg; SAR (10g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.5 %

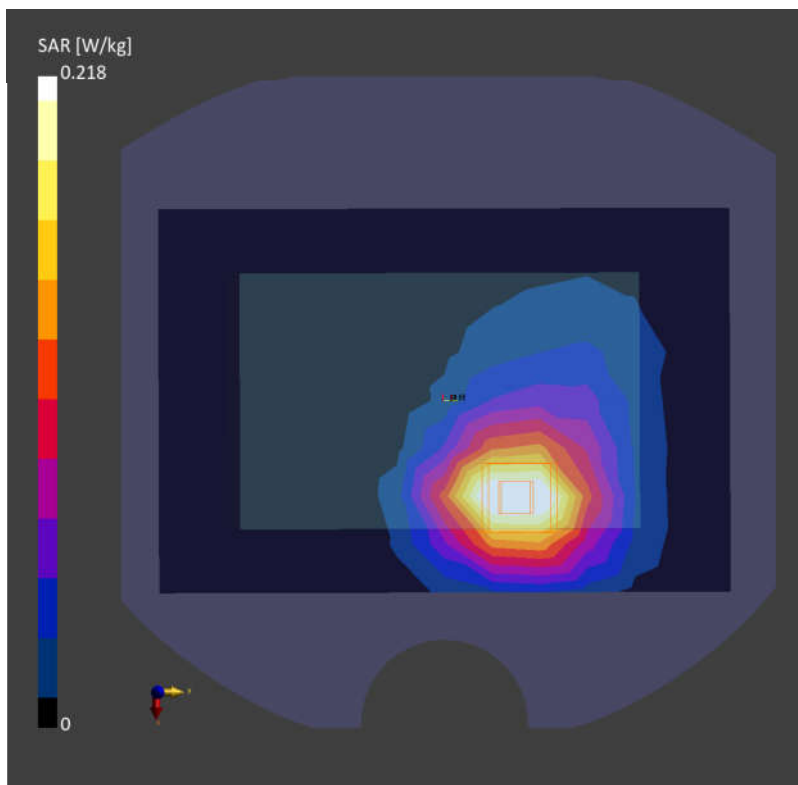

Date: 2026-02-13

29_WCDMA IV_RMC 12.2Kbps_Back_10mm_Ch1413

Communication System: UMTS-FDD

Frequency: 1732.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260213 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.257 W/kg; SAR (10g) = 0.155 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.272 W/kg; SAR (10g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.1 %

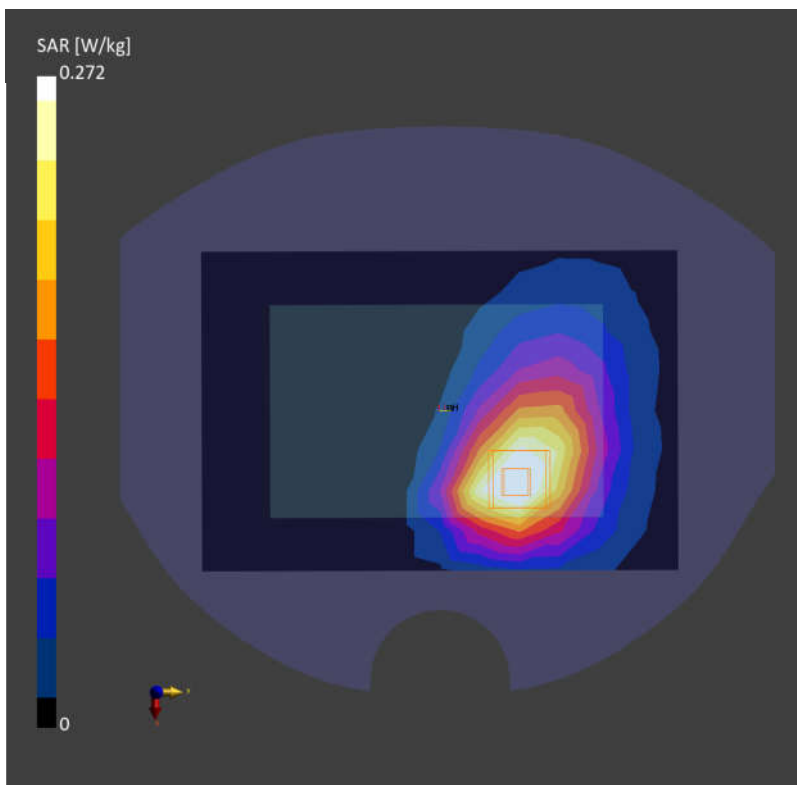

Date: 2026-02-12

30_WCDMA V_Ant 0_RMC 12.2Kbps_Back_10mm_Ch4182

Communication System: UMTS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:1

Medium: HSL_835_260212 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.136 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.214 W/kg; SAR (10g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

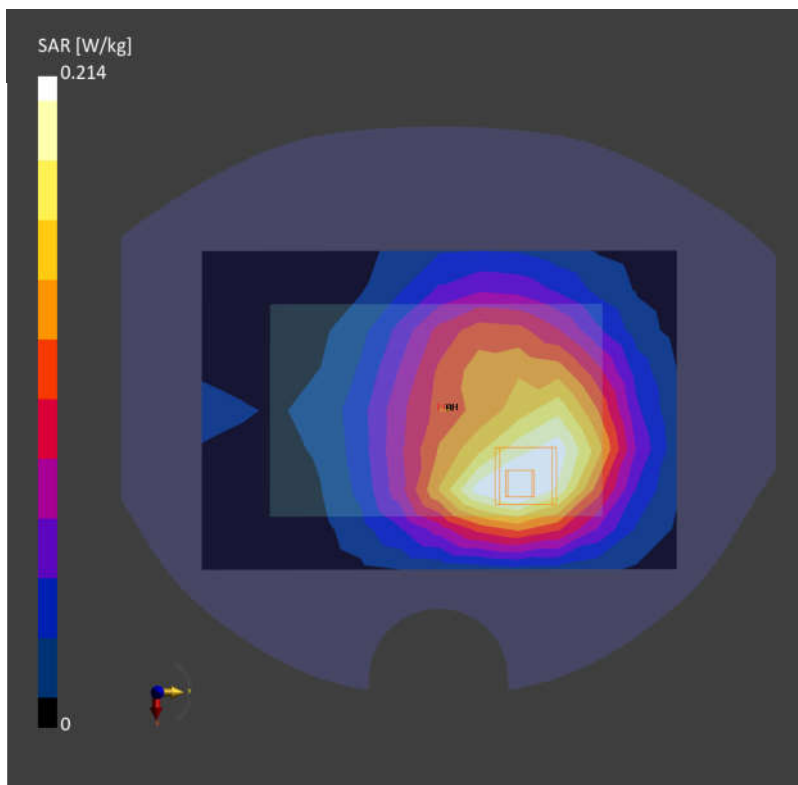

Date: 2026-02-16

31_LTE Band 7_20M_QPSK_1_0_Front_10mm_Ch21100

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260216 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.192 W/kg; SAR (10g) = 0.107 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.193 W/kg; SAR (10g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 18.5 mm

Ratio of SAR at M2 to SAR at M1 = 86.8 %

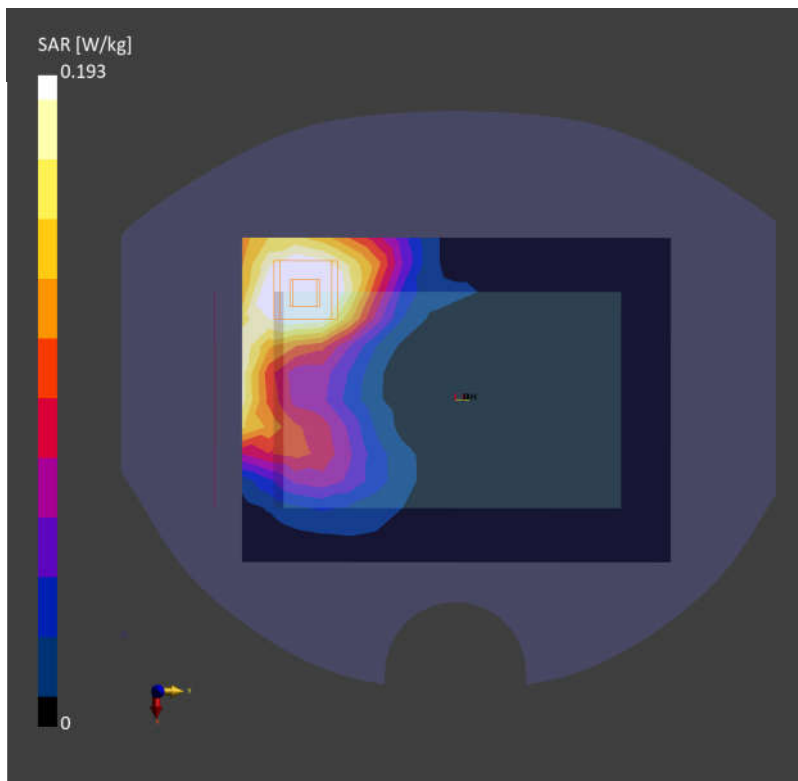

Date: 2026-03-04

32_LTE Band 12_10M_QPSK_1_0_Back_10mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.094 W/kg; SAR (10g) = 0.066 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.099 W/kg; SAR (10g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 87.3 %

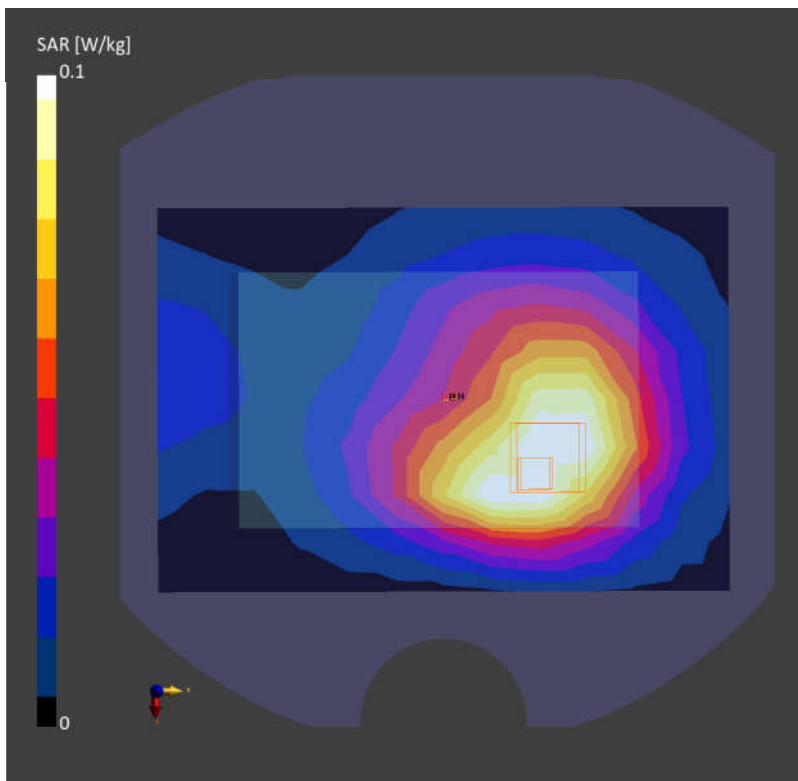

Date: 2026-03-04

33_LTE Band 13_10M_QPSK_1_0_Back_10mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.080 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.122 W/kg; SAR (10g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 27.4 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

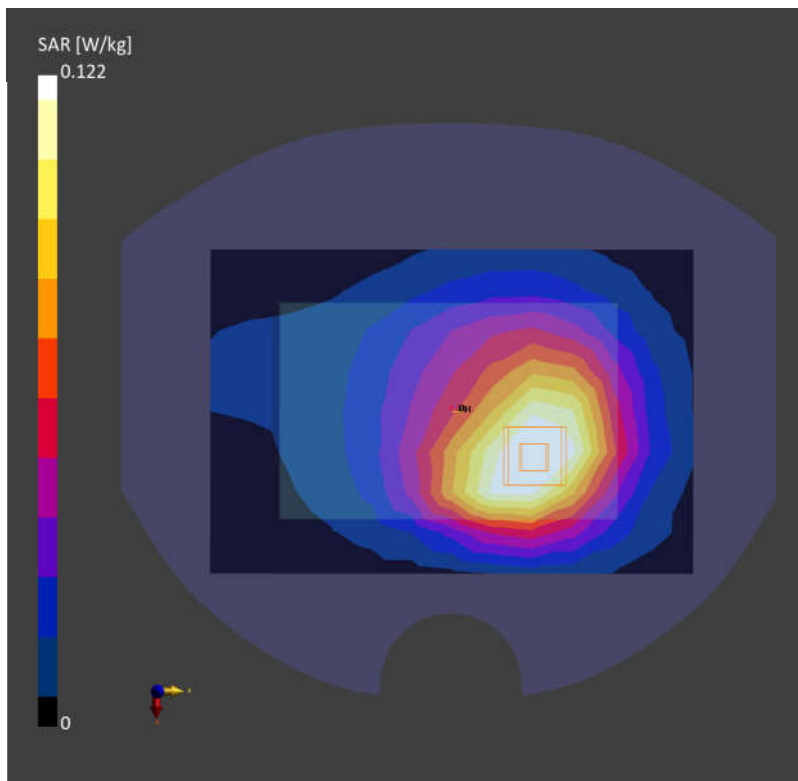

Date: 2026-02-14

34_LTE Band 25_20M_QPSK_1_0_Back_10mm_Ch26340

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260214 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.268 W/kg; SAR (10g) = 0.158 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.295 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

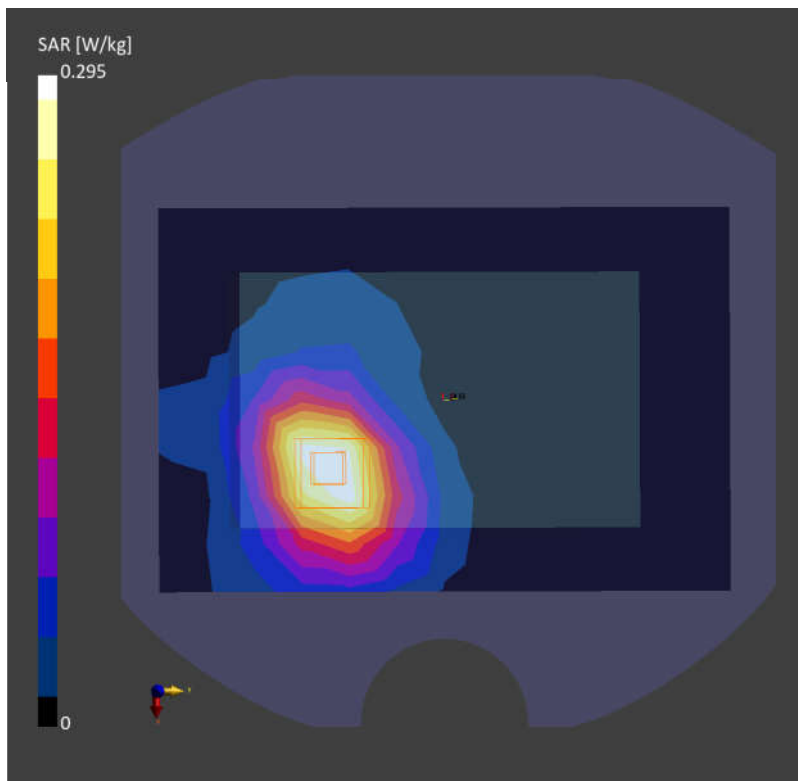

Date: 2026-02-12

35_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_260212 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.097 W/kg; SAR (10g) = 0.067 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.105 W/kg; SAR (10g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.6 %

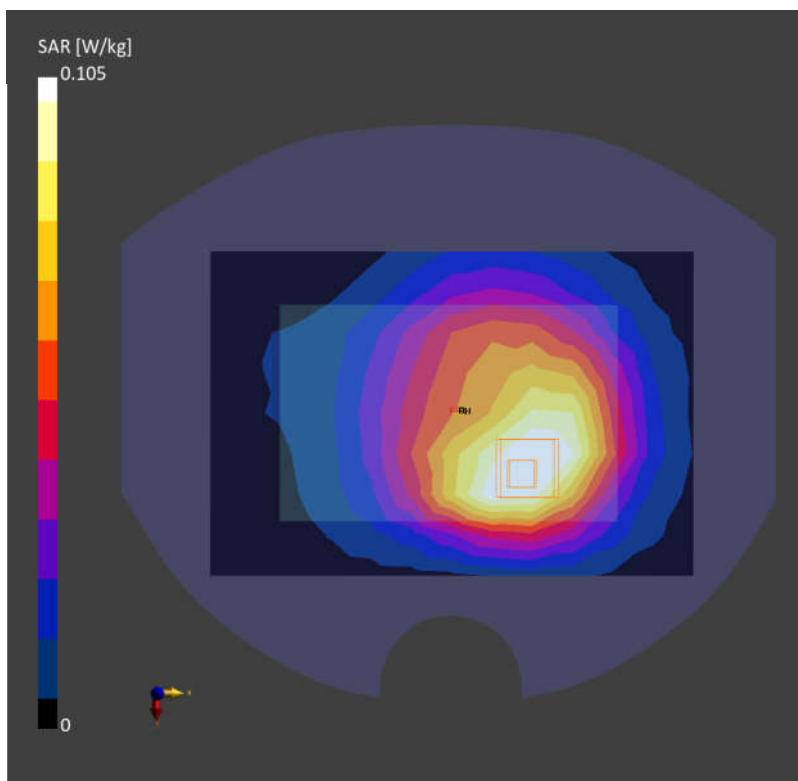

Date: 2026-02-15

36_LTE Band 30_10M_QPSK_1_0_Back_26mm_Ch27710

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_260215 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.528 W/kg; SAR (10g) = 0.315 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.9 %

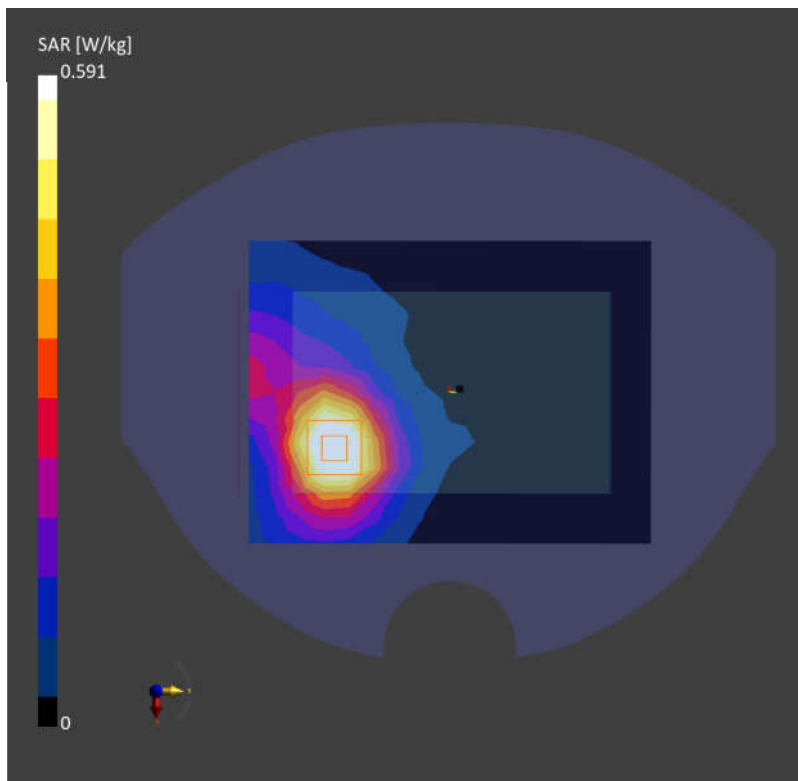

Date: 2026-02-13

37_LTE Band 66_20M_QPSK_1_0_Back_10mm_Ch132322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260213 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.127 W/kg; SAR (10g) = 0.075 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.137 W/kg; SAR (10g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.0 %

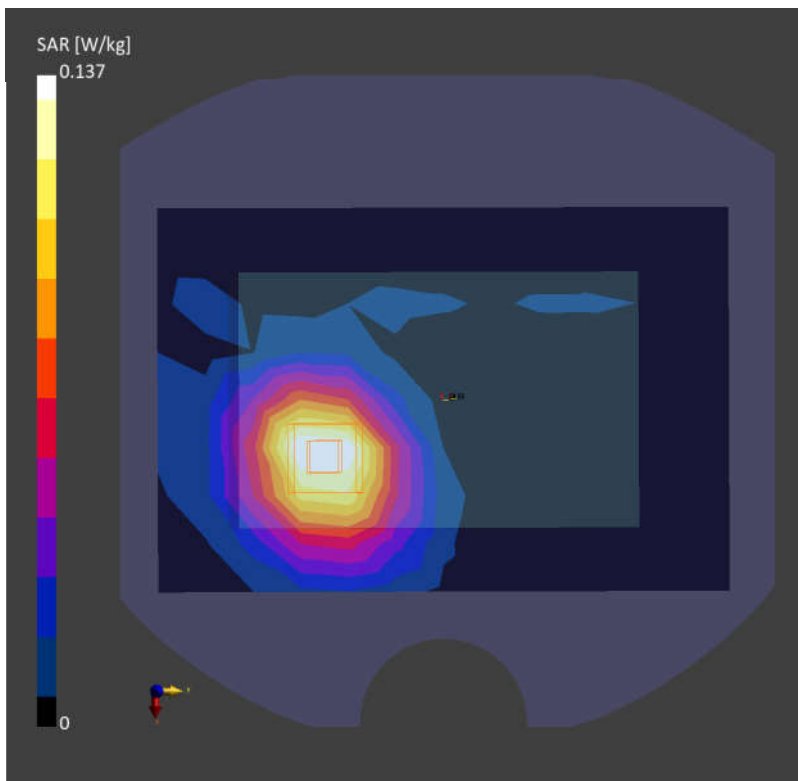

Date: 2026-03-04

38_LTE Band 71_20M_QPSK_1_0_Back_10mm_Ch133297

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.150 W/kg; SAR (10g) = 0.105 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.157 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.6 %

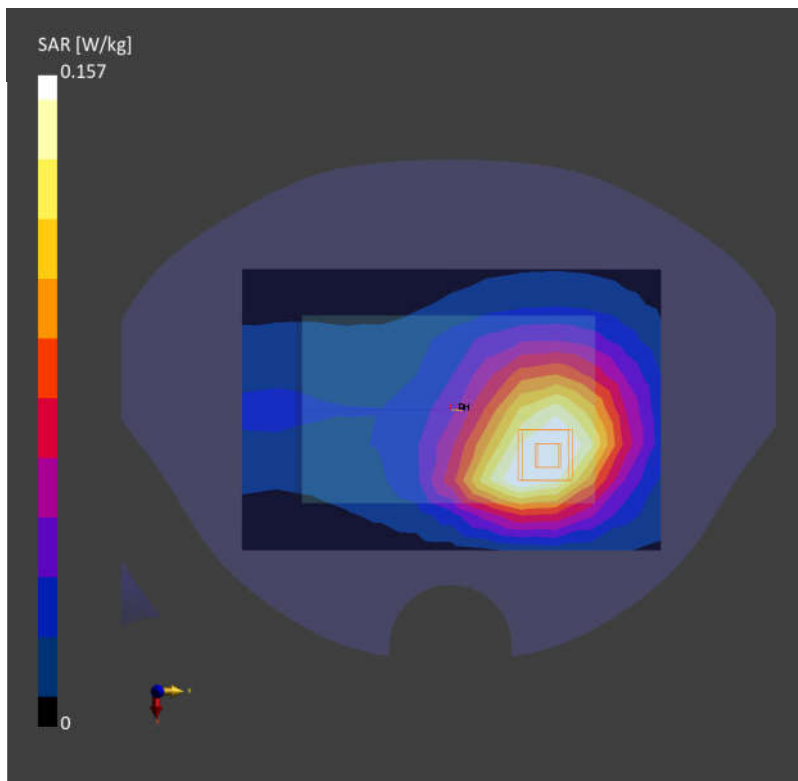

Date: 2026-02-16

39_LTE Band 41_20M_QPSK_1_0_Back_10mm_Ch40620

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2593.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_260216 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.300 W/kg; SAR (10g) = 0.160 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.294 W/kg; SAR (10g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

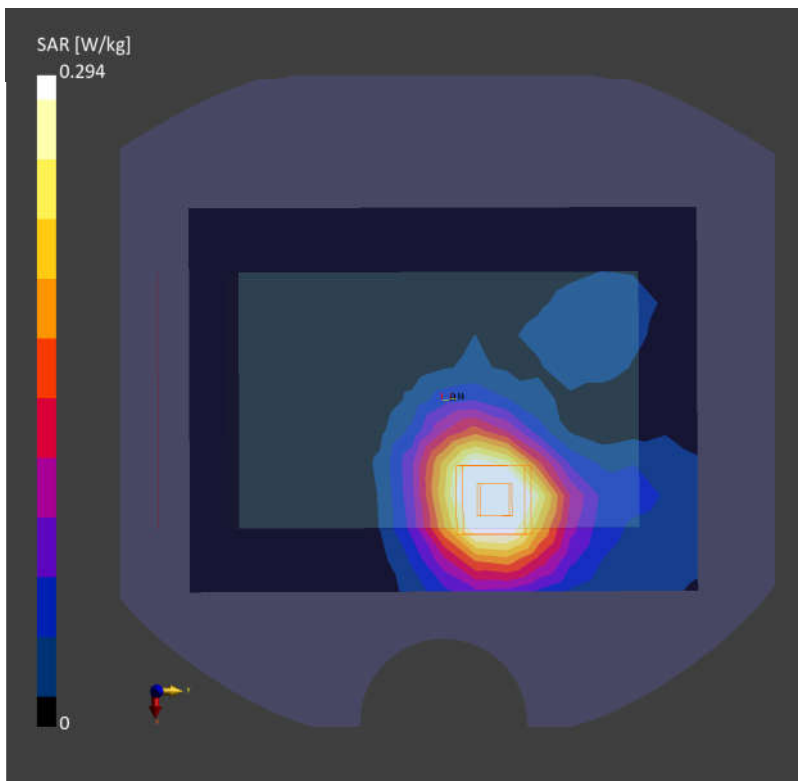

Date: 2026-02-18

40_LTE Band 42_20M_QPSK_1_0_Back_10mm_Ch42590

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3500.000 MHz; Duty Cycle: 1:1

Medium: HSL_3500_260218 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.62, 6.07, 5.74); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10172-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.131 W/kg; SAR (10g) = 0.068 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 0.126 W/kg; SAR (10g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 14.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

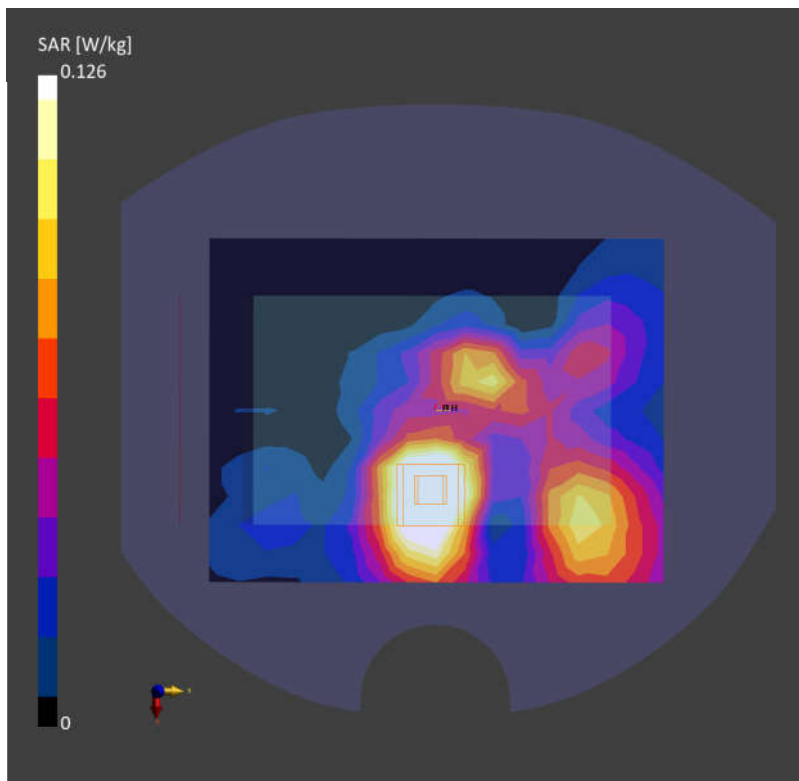

Date: 2026-02-19

41_LTE Band 48_20M_QPSK_1_0_Front_10mm_Ch55990

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3625.000 MHz; Duty Cycle: 1:1

Medium: HSL_3700_260219 Medium parameters used: $f = 3625.000$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.081 W/kg; SAR (10g) = 0.039 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.077 W/kg; SAR (10g) = 0.040 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.4 %

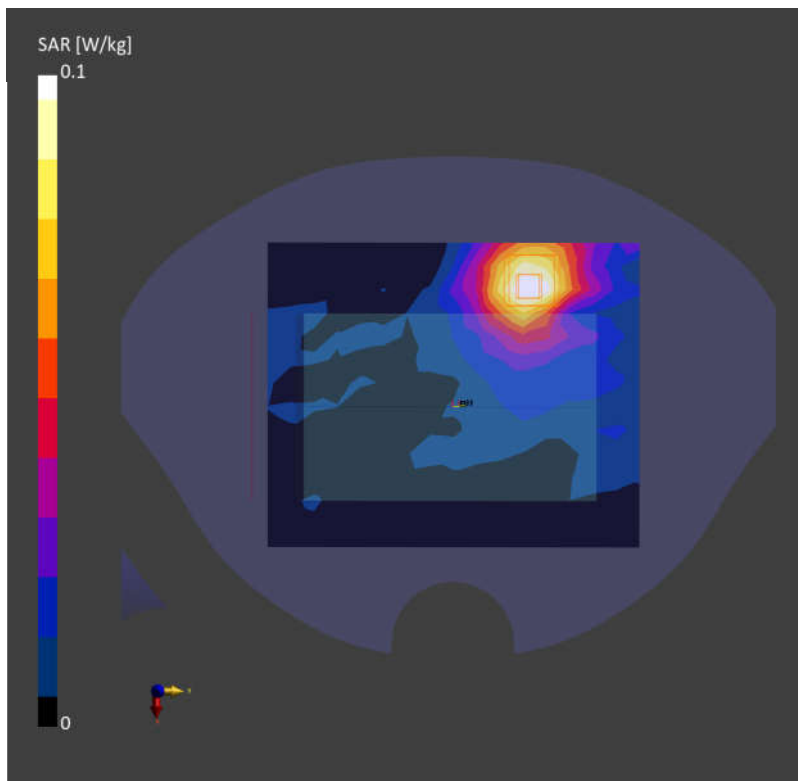

Date: 2026-02-16

42_FR1 n7_20M_BPSK_50_28_Back_10mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260216 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.289 W/kg; SAR (10g) = 0.151 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.275 W/kg; SAR (10g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

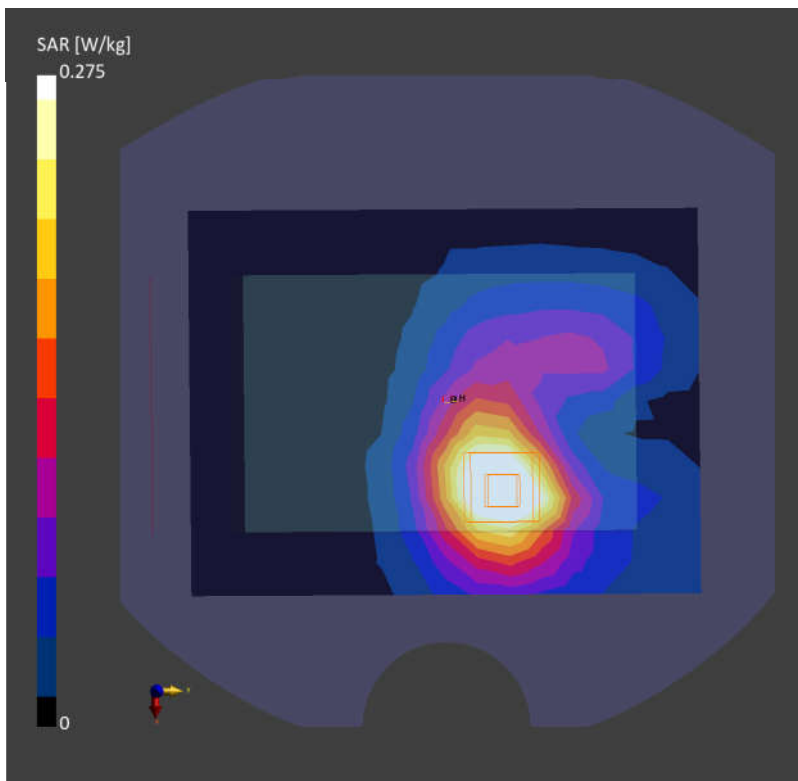

Date: 2026-03-04

43_FR1 n12_15M_BPSK_36_22_Back_10mm_Ch141500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.160 W/kg; SAR (10g) = 0.108 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.169 W/kg; SAR (10g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 14.5 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

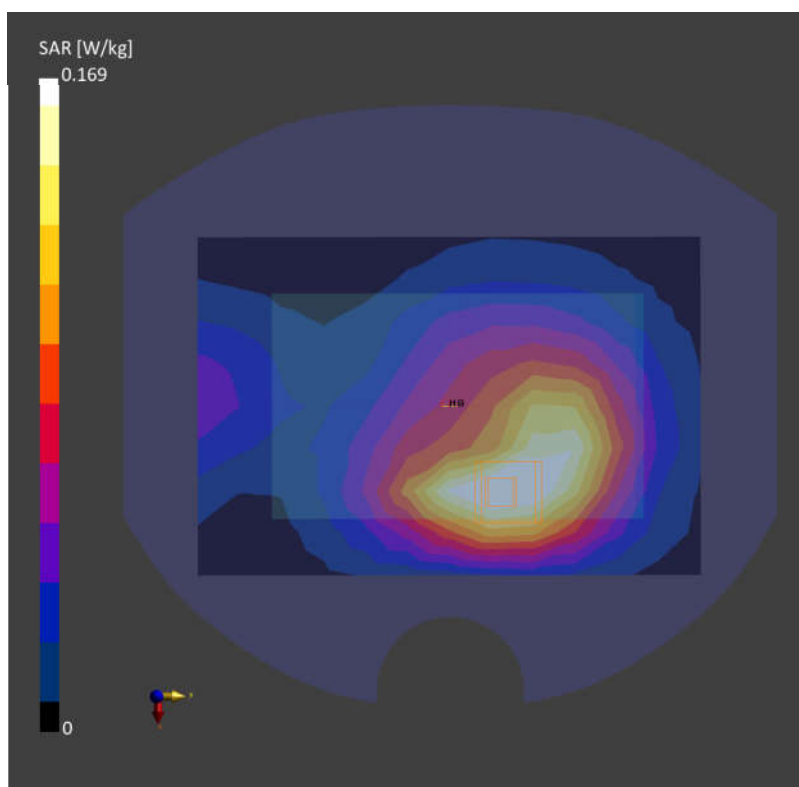

Date: 2026-03-04

44_FR1 n13_10M_BPSK_1_1_Back_10mm_Ch156400

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.122 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.185 W/kg; SAR (10g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.7 %

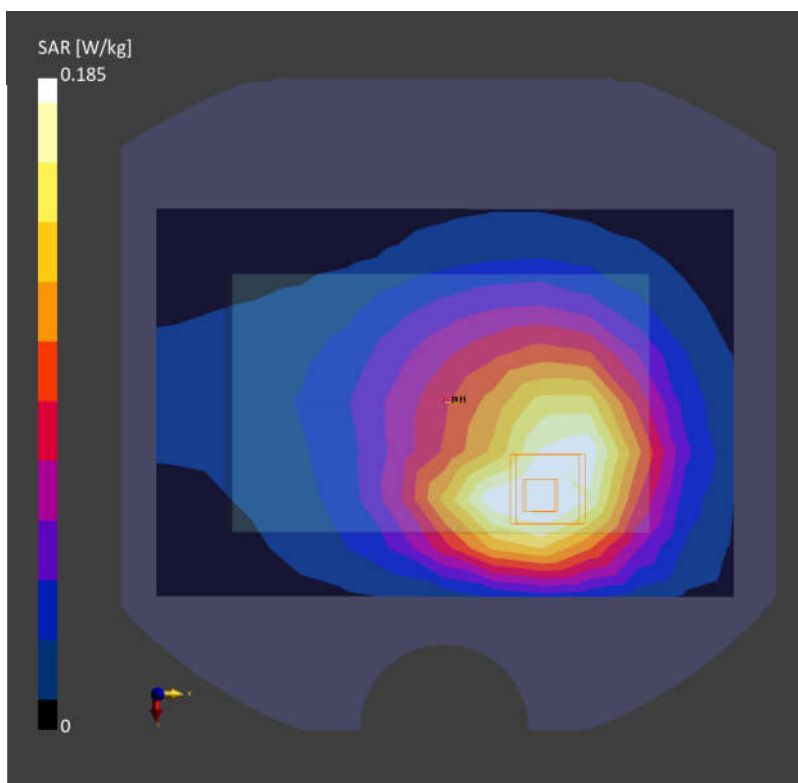

Date: 2026-02-14

45_FR1 n25_30M_BPSK_1_1_Back_10mm_Ch376500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1

Medium: HSL_1900_260214 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.274 W/kg; SAR (10g) = 0.160 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.301 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.6 %

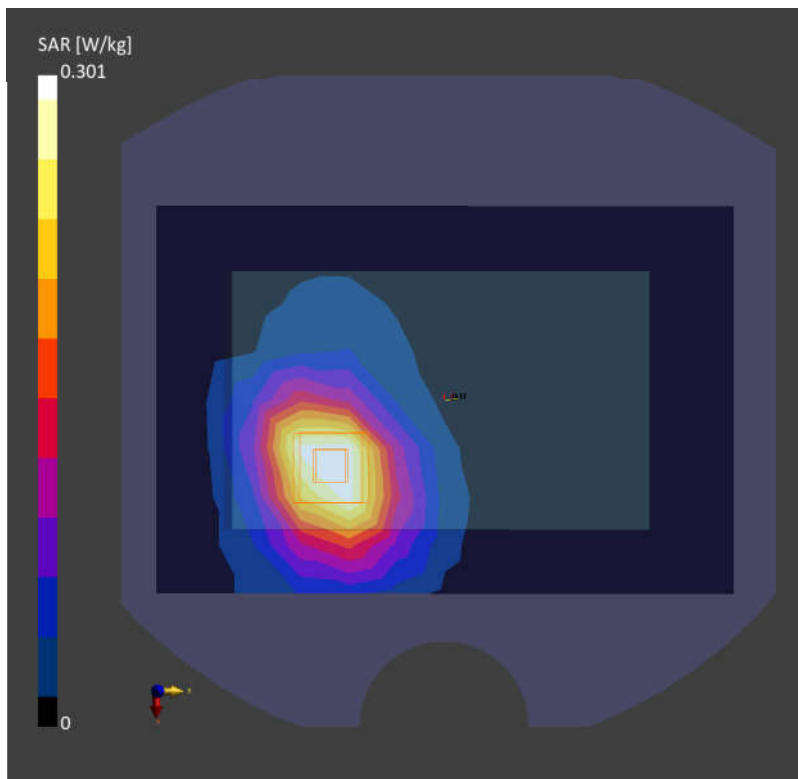

Date: 2026-02-12

46_FR1 n26_20M_BPSK_50_28_Back_10mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_260212 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.210 W/kg; SAR (10g) = 0.142 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.217 W/kg; SAR (10g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 22.2 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

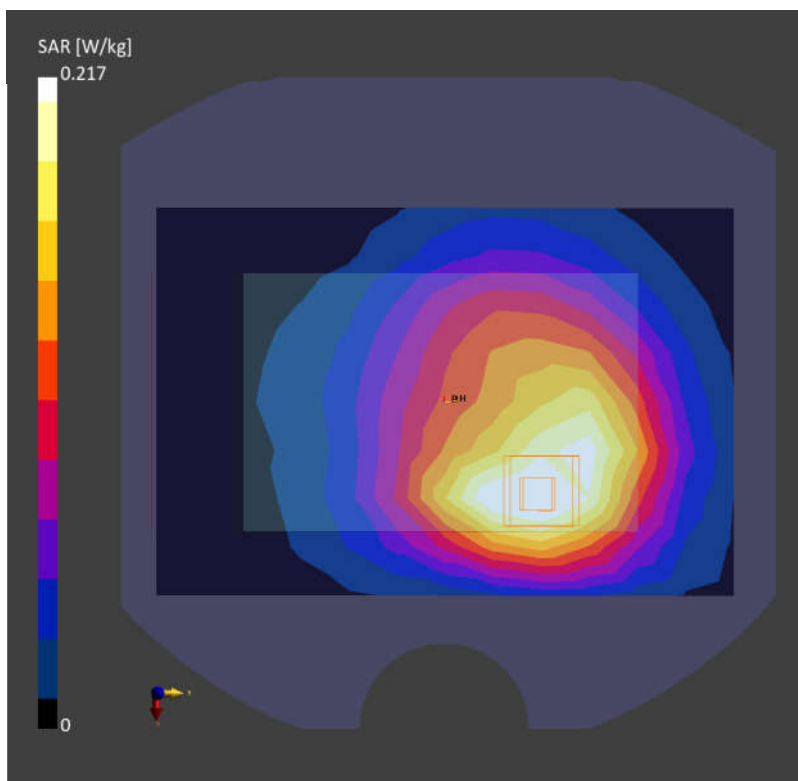

Date: 2026-02-15

47_FR1 n30_10M_BPSK_25_14_Back_10mm_Ch462000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_260215 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.317 W/kg; SAR (10g) = 0.170 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 87.0 %

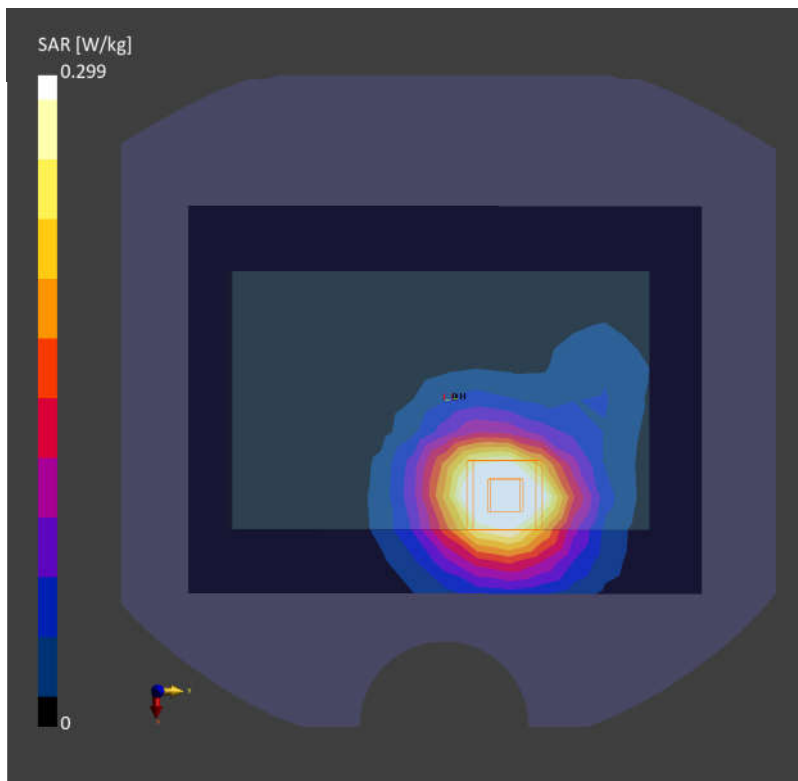

Date: 2026-02-13

48_FR1 n66_30M_BPSK_80_40_Front_10mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_260213 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.545 W/kg; SAR (10g) = 0.331 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.565 W/kg; SAR (10g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 90.8 %

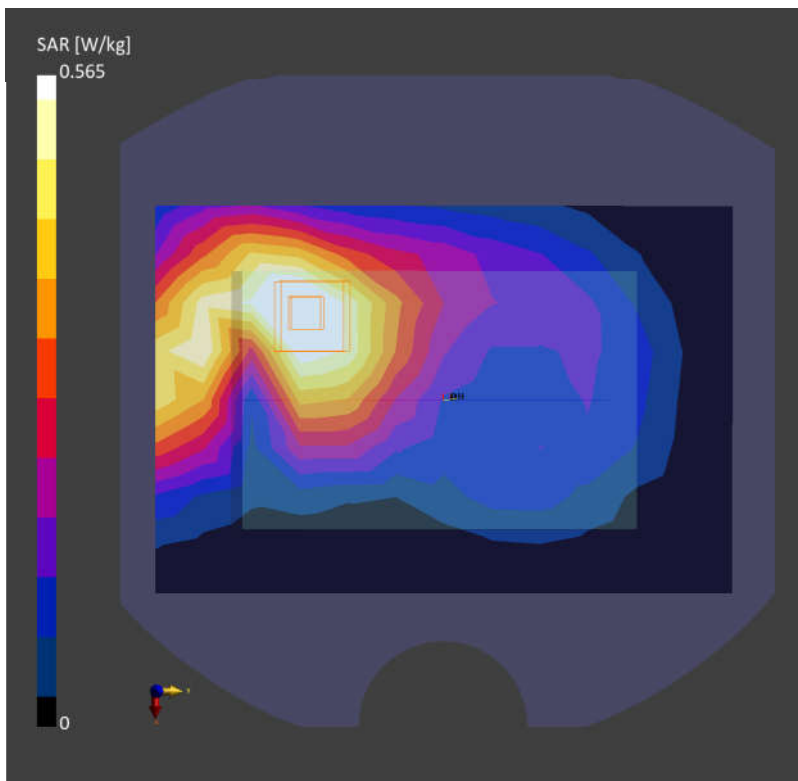

Date: 2026-03-04

49_FR1 n71_20M_BPSK_1_1_Back_10mm_Ch136100

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_260304 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.153 W/kg; SAR (10g) = 0.106 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 21.4 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

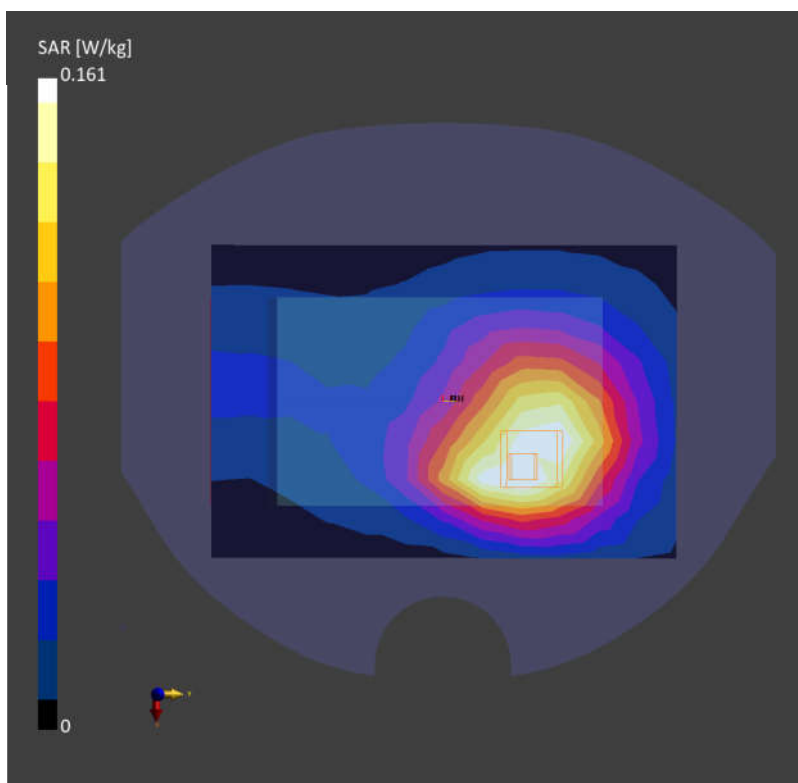

Date: 2026-02-16

50_FR1 n41_HPUE_100M_BPSK_1_1_Back_10mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_260216 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.088 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.160 W/kg; SAR (10g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 17.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.4 %

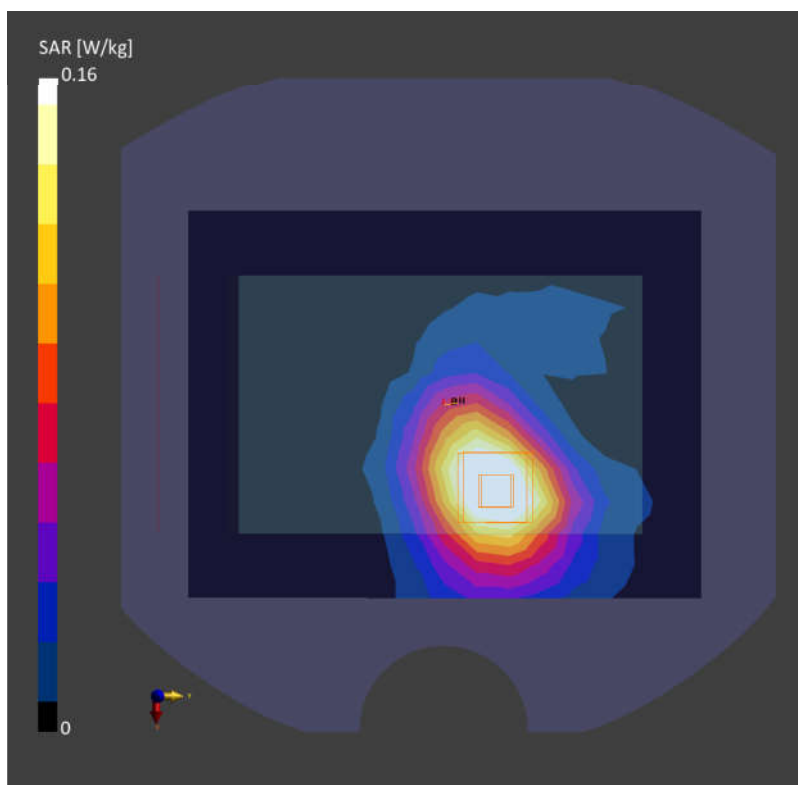

Date: 2026-02-19

51_FR1 n48_40M_BPSK_1_1_Front_10mm_Ch641666

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3624.990 MHz; Duty Cycle: 1:1

Medium: HSL_3700_260219 Medium parameters used: $f = 3624.990$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.459 W/kg; SAR (10g) = 0.214 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.477 W/kg; SAR (10g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 14.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

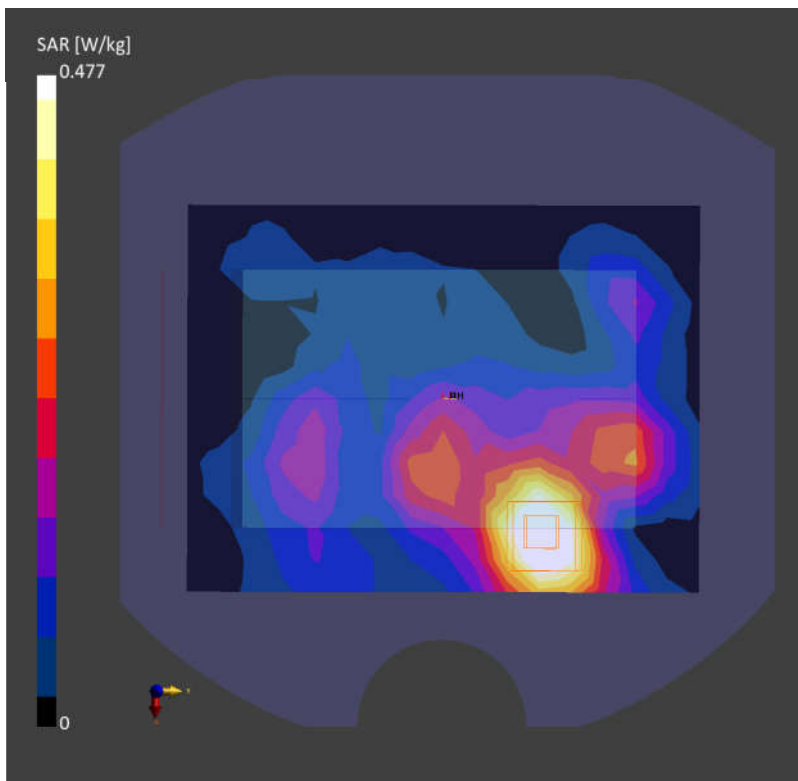

Date: 2026-02-20

52_FR1 n77_HPUE_100M_BPSK_135_69_Front_10mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_260220 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.33$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 5.93, 5.62); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.329 W/kg; SAR (10g) = 0.165 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.365 W/kg; SAR (10g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

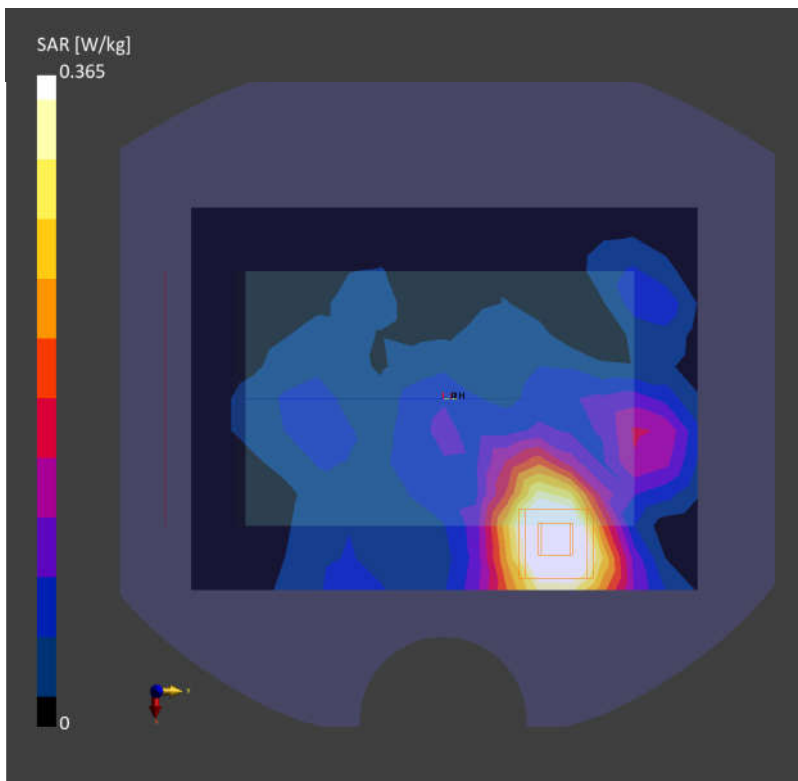

Date: 2026-02-20

53_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2437.000 MHz; Duty Cycle: 1:1

Medium: HSL_2450_260220 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.202 W/kg; SAR (10g) = 0.116 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.224 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.3 %

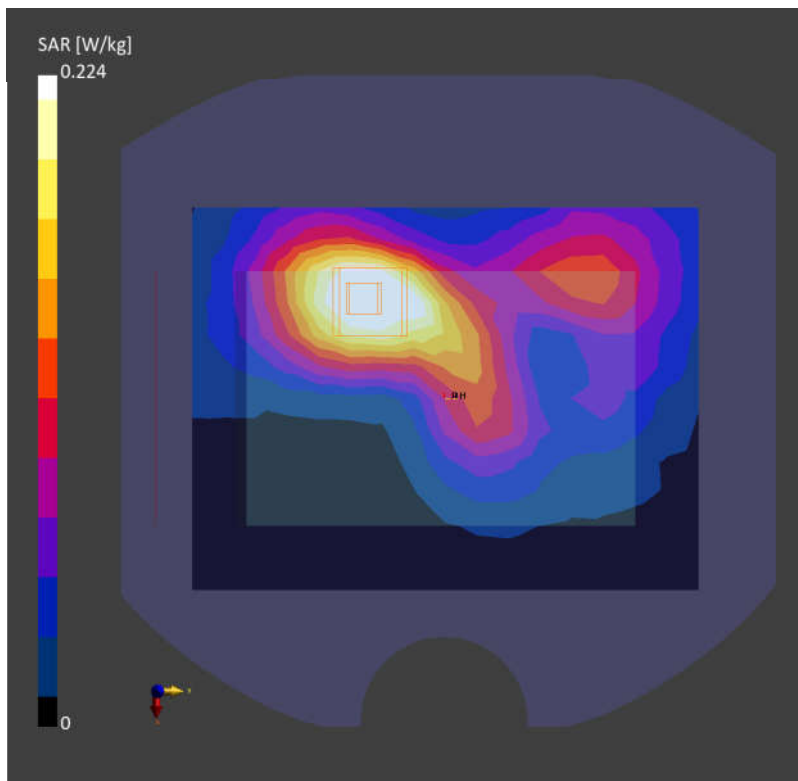

Date: 2026-02-21

54_WLAN5GHz_802.11n-HT40 MCS0_Back_10mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_260221 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.430 W/kg; SAR (10g) = 0.191 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.14 dB

SAR (1g) = 0.442 W/kg; SAR (10g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = > 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.9 %

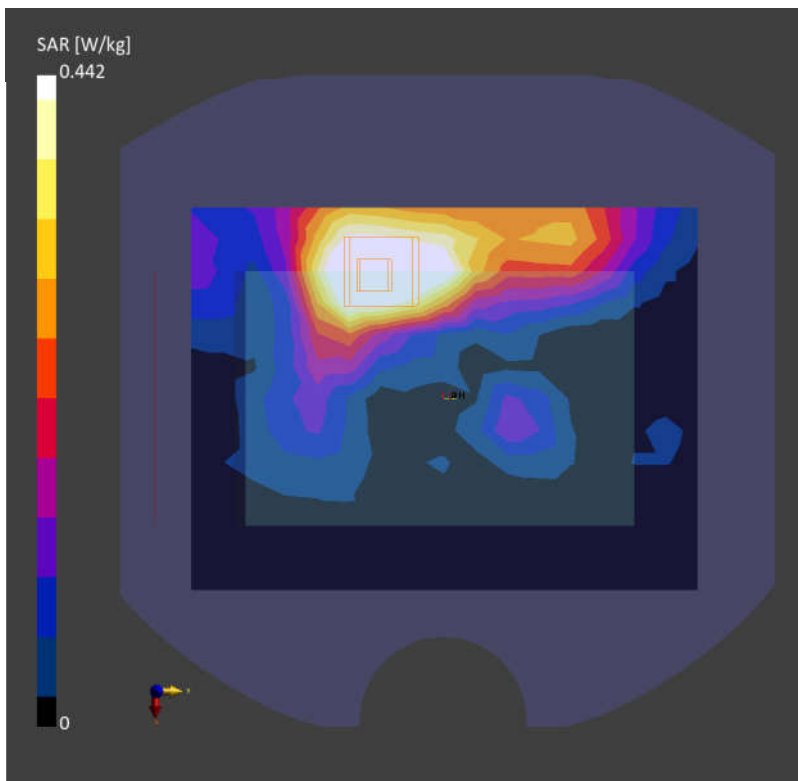

Date: 2026-02-22

55_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch122

Communication System: IEEE 802.11ac WiFi

Frequency: 5610.000 MHz; Duty Cycle: 1:1

Medium: HSL_5600_260222 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.398 W/kg; SAR (10g) = 0.173 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.13 dB

SAR (1g) = 0.416 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.6 %

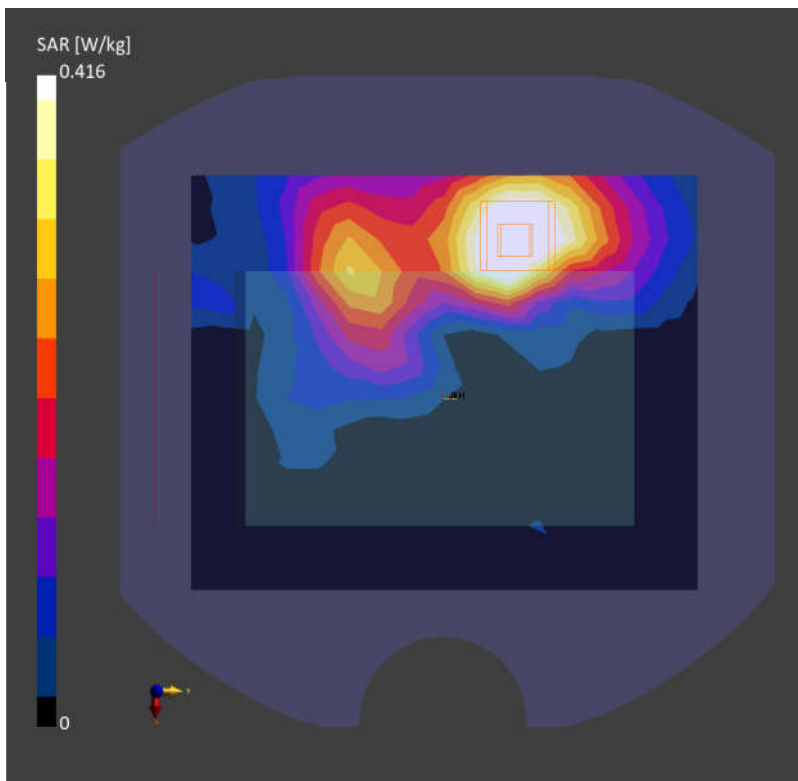

Date: 2026-02-23

56_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000 MHz; Duty Cycle: 1:1

Medium: HSL_5800_260223 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.389 W/kg; SAR (10g) = 0.167 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.398 W/kg; SAR (10g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.5 %

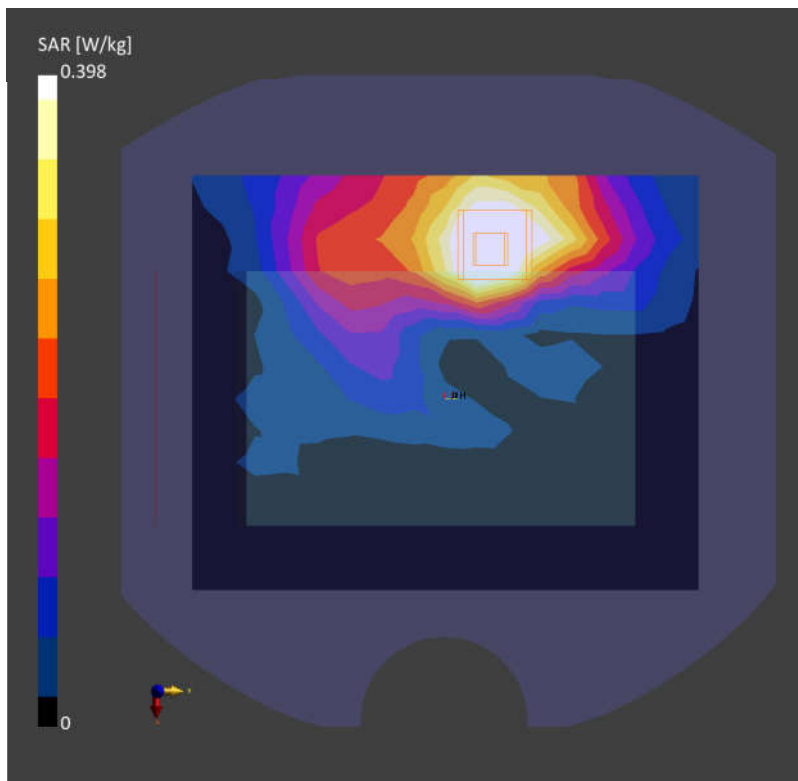

Date: 2026-02-20

57_Bluetooth_1Mbps_Back_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.304

Medium: HSL_2450_260220 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.003 W/kg; SAR (10g) = 0.001 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.003 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 59.3 %

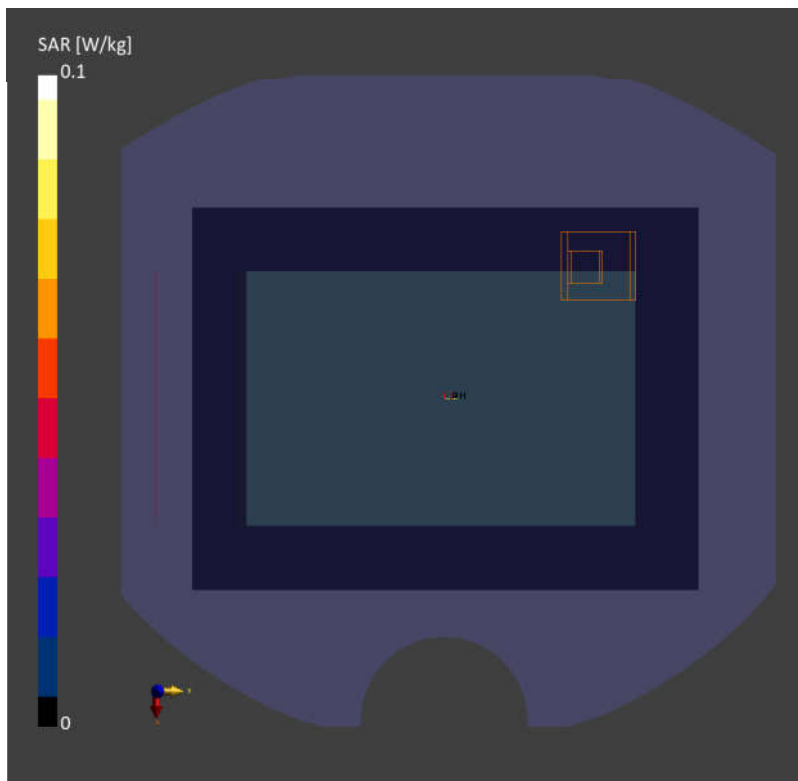

Date: 2026-02-25

58_WLAN6GHz_802.11ax-HE160 MCS0_Back_22mm_Ch47

Communication System: IEEE 802.11ax

Frequency: 6185.000MHz; Duty Cycle: 1:1

Medium: HSL_6500_260225 Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.64$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.57, 4.93, 4.67); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.331 W/kg; SAR (10g) = 0.175 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 0.371 W/kg; SAR (10g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

psAPD (4.0cm2, sq) = 3.36 [W/m2]

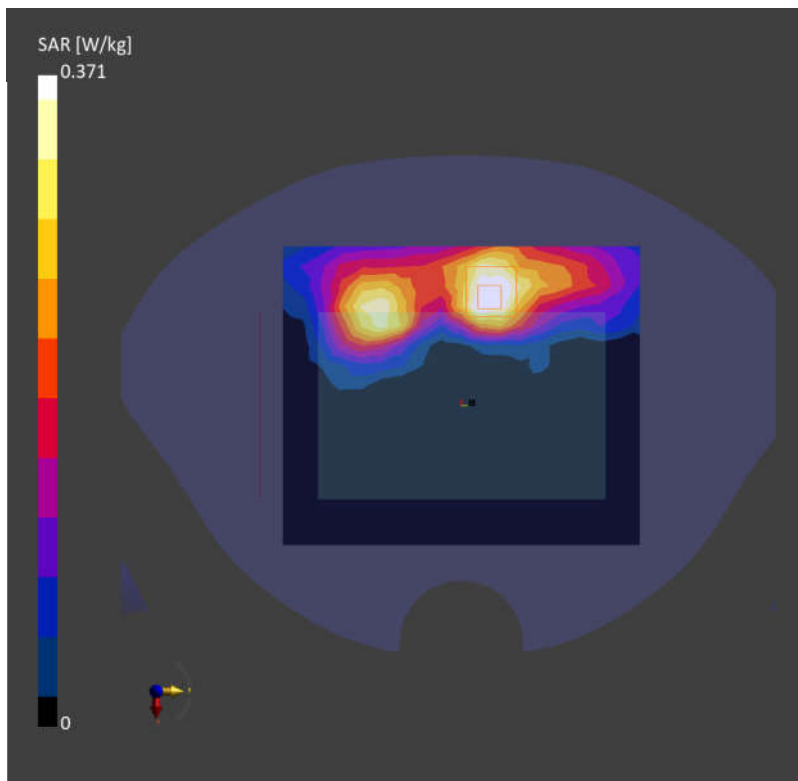

Date: 2026-02-21

59_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_260221 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.09 W/kg; SAR (10g) = 0.708 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 2.48 W/kg; SAR (10g) = 0.783 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 67.0 %

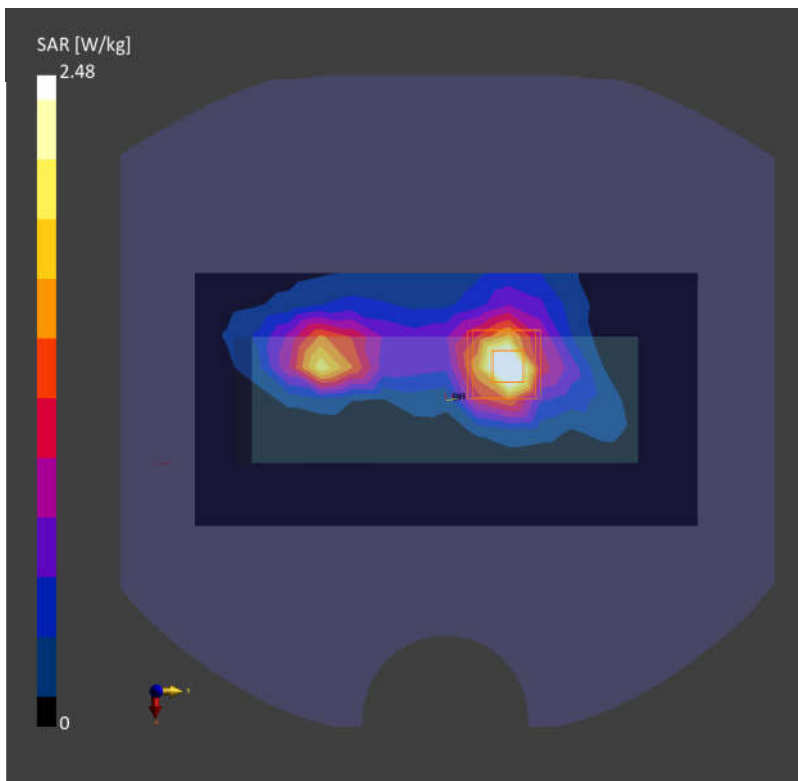

Date: 2026-02-22

60_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_0mm_Ch122

Communication System: IEEE 802.11ac WiFi

Frequency: 5610.000 MHz; Duty Cycle: 1:1

Medium: HSL_5600_260222 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (80.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.14 W/kg; SAR (10g) = 0.750 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 2.10 W/kg; SAR (10g) = 0.723 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.2 %

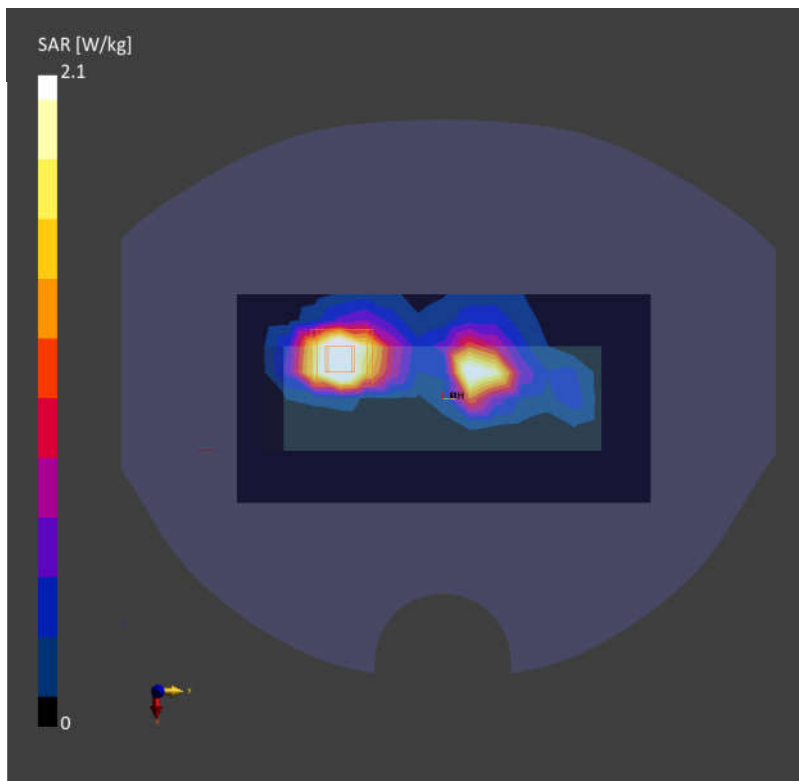

Date: 2026-02-25

61_WLAN6GHz_802.11ax-HE160 MCS0_Right Side_0mm_Ch207

Communication System: IEEE 802.11ax

Frequency: 6985.000MHz; Duty Cycle: 1:1

Medium: HSL_6500_260225 Medium parameters used: $f = 6985.000$ MHz; $\sigma = 6.72$ S/m; $\epsilon_r = 33.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.57, 4.93, 4.67); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10743-AAC

Area Scan (85.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.566 W/kg; SAR (10g) = 0.218 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.568 W/kg; SAR (10g) = 0.220 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.3 %

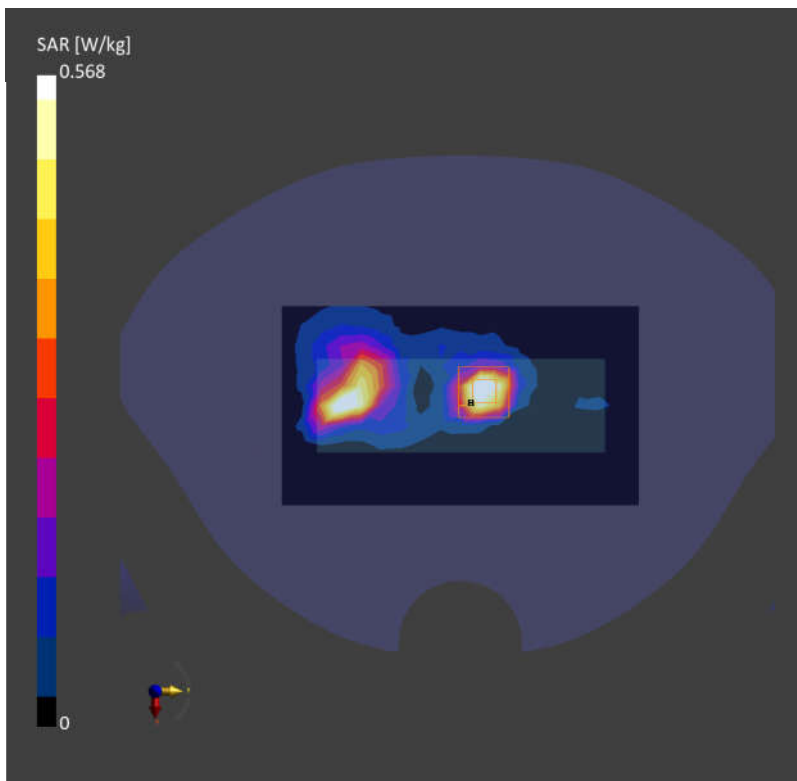psAPD (4.0cm², sq) = 5.12[W/m²]

For PD

01_WLAN6GHz_802.11ax-HE160 MCS0_Right Side_2mm_Ch111

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]
Device,	135.0 x 85.0 x 42.0

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	U-NII-6	WLAN, 10743-AAC	6505.0, 111	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1065	Air -	EUmmWV4 - SN9441_F1-55GHz, 2025-11-17	DAE4 Sn1691, 2025-06-04

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2026-02-28
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	3.19
psPDtot+ [W/m ²]	3.56
psPDmod+ [W/m ²]	4.90
E _{max} [V/m]	50.8
Power Drift [dB]	0.06

