




FCC RADIO TEST REPORT

FCC ID : U4G-CMFSNR
Equipment : MOBILE COMPUTER/BARCODE READER
Model Name : CMFSNR
Applicant : Datalogic S.r.l.
Via San Vitalino 13 CALDERARA DI RENO, BO 40012 Italy
Standard : FCC Part 15 Subpart E §15.407

The product was received on Feb. 02, 2026 and testing was performed from Feb. 24, 2026 to Mar. 28, 2026. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Result	7
2.1 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC) ...	7
2.2 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	12
3 List of Measuring Equipment.....	15
Appendix A. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR620207	01	Initial issue of report	Apr. 13, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2.1	15.407 KDB 987594 D02 Section II. L.	Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Freda Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs WCDMA/LTE/5G NR, Bluetooth, BLE, Wi-Fi 802.11b/g/n/a/ac/ax, NFC, WPC Rx and GNSS Rx.
Antenna Type WLAN: <Ant. 2>: LDS Antenna <Ant. 3>: LDS Antenna

Antenna information for Directional Gain		
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	Ant 2: -0.1 Ant 3: -0.6
6425 MHz ~ 6525 MHz	Peak Gain (dBi)	Ant 2: -2.9 Ant 3: -0.8
6525 MHz ~ 6875 MHz	Peak Gain (dBi)	Ant 2: -0.5 Ant 3: -2.6
6875 MHz ~ 7125 MHz	Peak Gain (dBi)	Ant 2: -0.6 Ant 3: -1.8

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 1190 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC designation No.: TW1190

Note: The test site complies with ANSI C63.4 2014 requirement.



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Result

2.1 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)

2.1.1 Limit of Standard Client Proper Power Adjustment

15.407 KDB 987594 D02 Section II. L. Power limits for standard client devices

c) The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point

2.1.2 Test Procedures of Standard Client Proper Power Adjustment

The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v3.

Section L. Proper Power Adjustment

2.1.3 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

Test procedure to show that the client device can lower its power accordingly.

2.1.4 Test Procedure:

1. Connect equipment as shown in Figure 7 below.
2. Adjust Atten 1 to Std Power AP so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
3. Configure the Client and AP so that they associate and start sending data (stream data). The AP should be configured such that its registered power is 36 dBm EIRP.
4. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Use this power, along with its antenna gain, to calculate the Client EIRP.
6. The Client EIRP should be minimally 6 dB lower than that of the AP.
7. Repeat Steps 2 through 5 at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

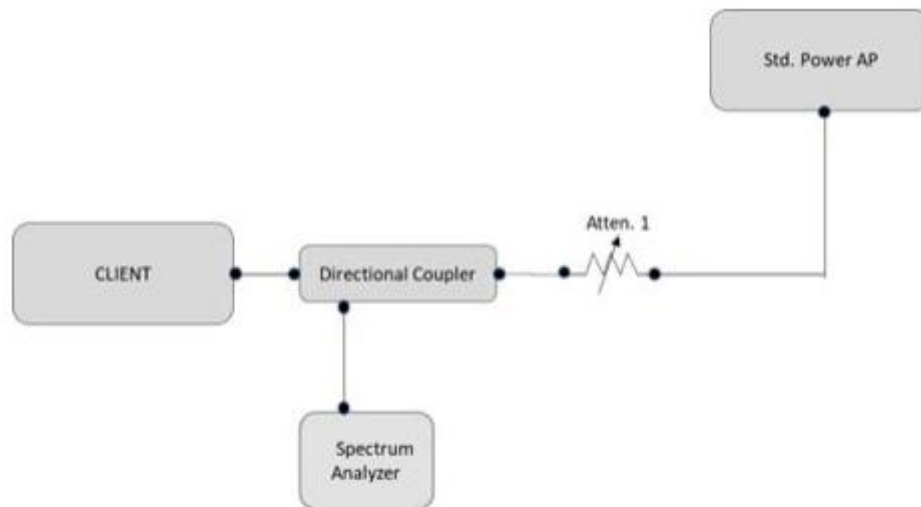


Figure 7. Test setup for conducted testing

2.1.5 Test Result Summary

Companion Standard Power AP: Brand name: Radio Communication Analyzer, Model name: MT8862A

802.11ax 20MHz bandwidth

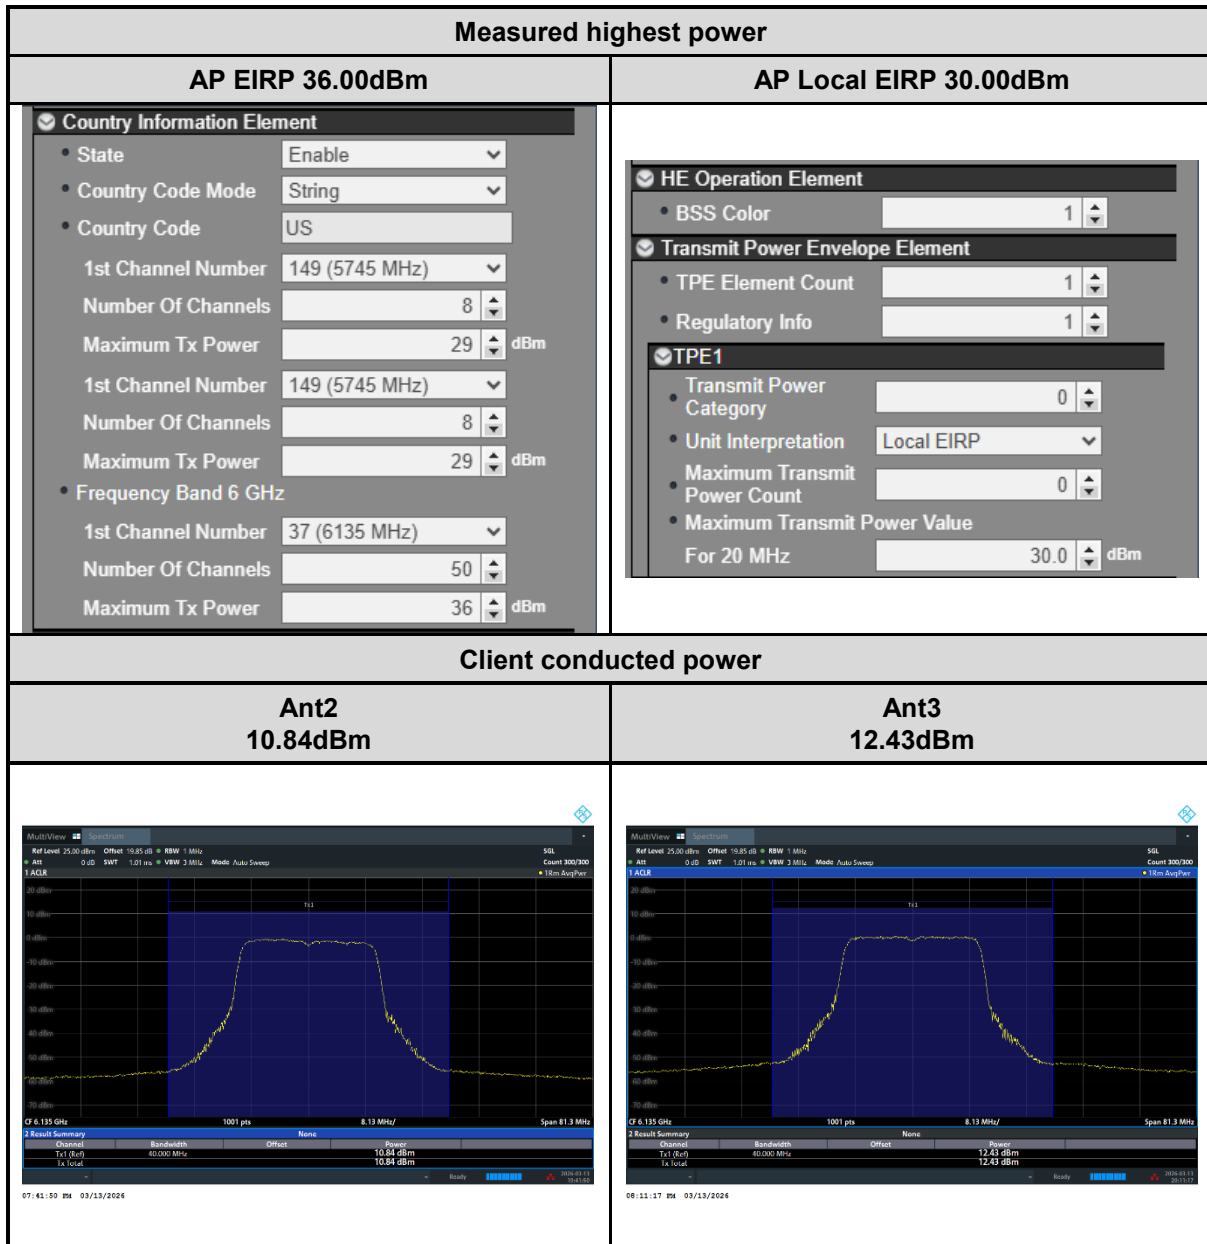
Test channel 37

	Client Conducted Power (dBm)			Client EIRP (dBm)	AP EIRP (dBm)	AP to client EIRP Delta (dB)
	Ant2	Ant3	MIMO			
Maximum EIRP	10.84	12.43	14.72	14.62	36.00	30.00
Midpoint EIRP	8.81	9.91	12.41	12.31	24.00	18.00
Lowest EIRP	5.51	7.31	9.51	9.41	21.00	15.00
Requirement						At least 6 dB
Result						Pass

Note: Client EIRP = Client MIMO conducted power + Antenna gain (-0.1dBi)



2.1.6 Test Result Plot





Measured mid-point power

AP EIRP 24.00dBm

Country Information Element

- State: Enable
- Country Code Mode: String
- Country Code: US
- 1st Channel Number: 149 (5745 MHz)
- Number Of Channels: 8
- Maximum Tx Power: 29 dBm
- 1st Channel Number: 149 (5745 MHz)
- Number Of Channels: 8
- Maximum Tx Power: 29 dBm
- Frequency Band 6 GHz
- 1st Channel Number: 37 (6135 MHz)
- Number Of Channels: 50
- Maximum Tx Power: 24 dBm

AP Local EIRP 18.00dBm

HE Operation Element

- BSS Color: 1

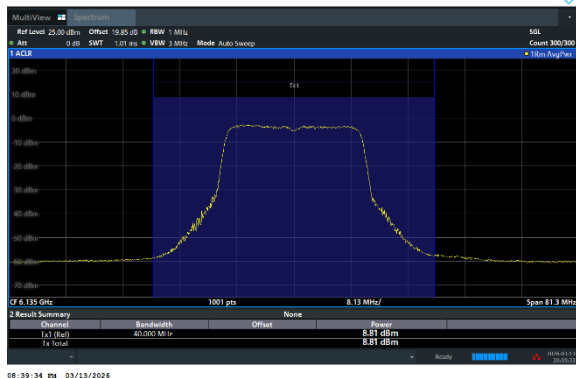
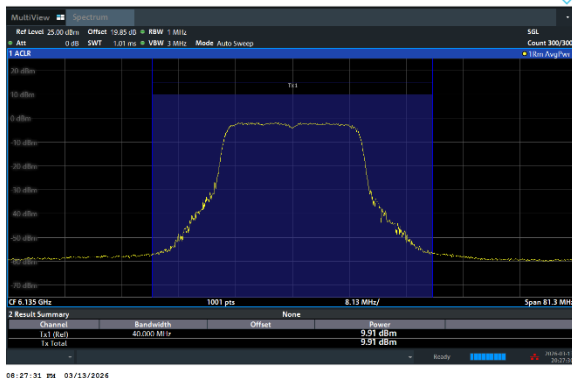
Transmit Power Envelope Element

- TPE Element Count: 1
- Regulatory Info: 1

TPE1

- Transmit Power Category: 0
- Unit Interpretation: Local EIRP
- Maximum Transmit Power Count: 0
- Maximum Transmit Power Value: 18.0 dBm

Client conducted power

Ant2
8.81dBmAnt3
9.91dBm



Measured lowest power

AP EIRP 21.00dBm

Country Information Element

- State: Enable
- Country Code Mode: String
- Country Code: US
- 1st Channel Number: 149 (5745 MHz)
- Number Of Channels: 8
- Maximum Tx Power: 29 dBm
- 1st Channel Number: 149 (5745 MHz)
- Number Of Channels: 8
- Maximum Tx Power: 29 dBm
- Frequency Band 6 GHz
- 1st Channel Number: 37 (6135 MHz)
- Number Of Channels: 50
- Maximum Tx Power: 21 dBm

AP Local EIRP 15.00dBm

HE Operation Element

- BSS Color: 1

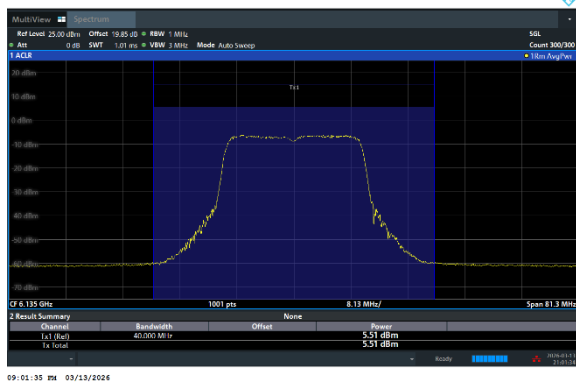
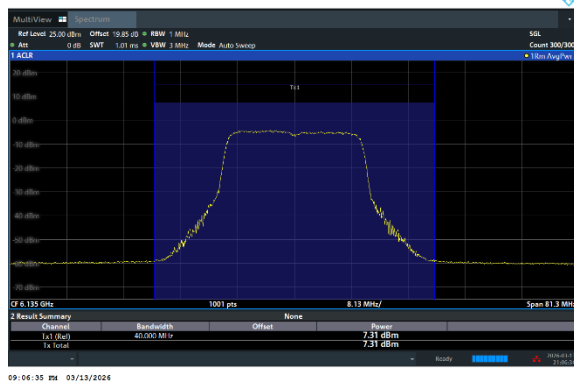
Transmit Power Envelope Element

- TPE Element Count: 1
- Regulatory Info: 1

TPE1

- Transmit Power Category: 0
- Unit Interpretation: Local EIRP
- Maximum Transmit Power Count: 0
- Maximum Transmit Power Value For 20 MHz: 15.0 dBm

Client conducted power

Ant2
5.51dBmAnt3
7.31dBm



2.2 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

2.2.1 Limit of Proper Power Adjustment

15.407 KDB 987594 D02 Section II. K. Power limits for standard client devices

A client device may connect to a Standard Power AP with a maximum power level of 30 dBm EIRP. A client may also connect to a Low Power indoor AP, but the power level is limited to a maximum of 24 dBm EIRP.

2.2.2 Test Procedures of Standard Client Proper Power Adjustment

The testing follows FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03.

Section K. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP

2.2.3 Test Procedure:

1. Connect equipment as shown in Figure 6 below.
2. Adjust Atten 2 to Std Power AP so as to facilitate error free communication with the Client (Atten 1 should be set to High on the RF path to the Low Power AP)
3. Configure the Client and APs so that they associate and start sending data (stream data). It is important that the client is configured to transmit at its highest power level. Initially, because the attenuation on Atten 1 is set high, the Client will only associate with the Std Power AP.
4. Verify transmission between Client and Std Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Gradually increase Atten 2 while at the same time decreasing Atten 1. This simulates the Client moving from outdoors to indoors. At some level of attenuation the Client should associate with the Low Power indoor AP.
6. Verify transmission between Client and Low Power AP.
7. Measure the RF power of the Client device using the same method as in step 4. Verify the power is no more than 24 dBm EIRP

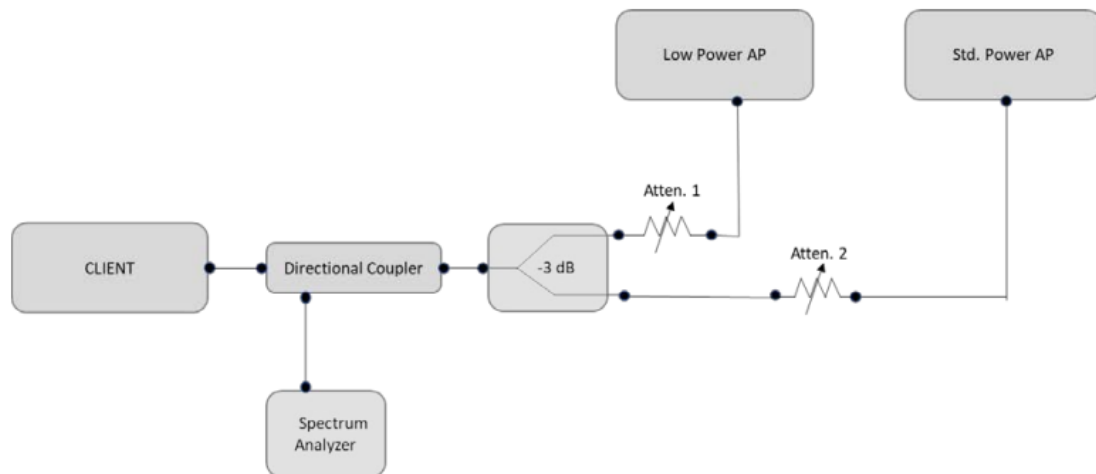


Figure 6. Test setup for conducted testing

2.2.4 Test Result Summary

Companion Standard Power AP: Brand name: Radio Communication Analyzer, Model name: MT8862A

Companion Low Power indoor AP: Brand name: ASUS, Model name: RT-BE92U

802.11ax 20MHz bandwidth

Test channel 37

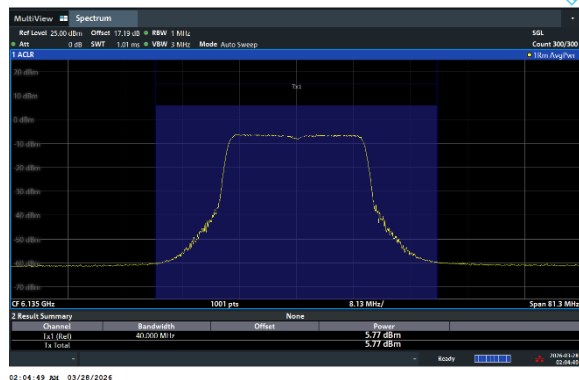
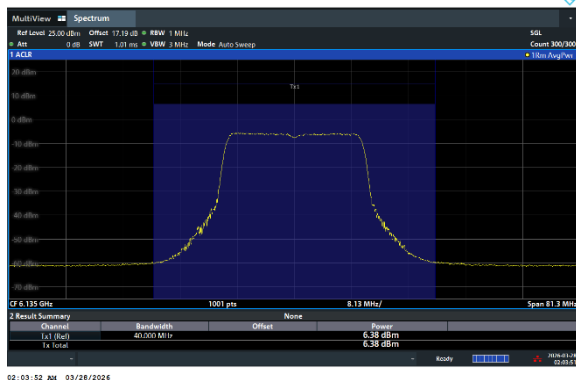
	Client Conducted Power (dBm)			Client EIRP (dBm)	Limit EIRP (dBm)	Result
	Ant2	Ant3	MIMO			
Indoor EIRP	5.77	6.38	9.10	9.00	24	Pass
Standard EIRP	12.47	12.82	15.66	15.56	30	Pass

Note: Client EIRP = Client MIMO conducted power + Antenna gain (-0.1dBi)

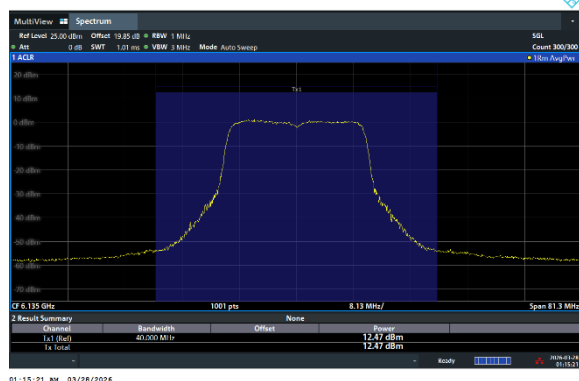
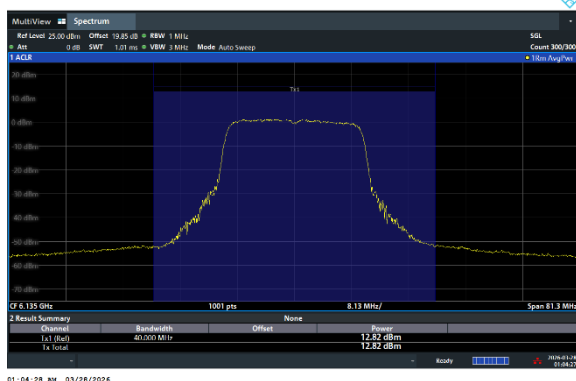


2.2.5 Test Result Plot

Measured Indoor power

Ant2
5.77dBmAnt3
6.38dBm

Measured Standard power

Ant2
12.47dBmAnt3
12.82dBm



3 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV3013	101549	10Hz~13.6GHz	Dec. 18, 2025	Feb. 24, 2026~ Mar. 28, 2026	Dec. 17, 2026	APC (DF02-HY)
Software 1	Sporton	DFS & Adaptivity Tools	N/A	Ver 1.0	NCR	Feb. 24, 2026~ Mar. 28, 2026	NCR	APC (DF02-HY)
Coupler	Woken	10dB 30W SMA	DOM5CIW3A1	0.5-18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7A1	0.5GHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
Power Divider	Woken	2Way Divider	DCMB1KW7A2	0.5GHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	EM	SFL402	30cm-#6	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-01	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-09	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	MTJ	SBF405	30cm-10	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-01	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-03	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-05	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)
RF Cable	EC	SS405	100cm-10	30 kHz~18GHz	Calibration from System	Feb. 24, 2026~ Mar. 28, 2026	Calibration from System	APC (DF02-HY)