

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands	4
A.2.2 Emissions outside the frequency band:	54
A.2.3 Emissions in Non-restricted Frequency Bands:	54
A.3 EMISSION BANDWIDTH	55
A.3.1 Emission Bandwidth Result	55
A.3.2 Measurement Plots	57
A.4 MAXIMUM PEAK OUTPUT POWER	65
A.4.1 Average Output Power	65
A.5 EMISSION LIMITATIONS MEASUREMENT	69
A.6 POWER SPECTRAL DENSITY	201
A.6.1 Power Spectral Density Result	201
A.6.2 Measurement Plots	205
A.7 FREQUENCY STABILITY	217
A.7.1 Frequency stability Result	217


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2017/10/11	Temp./Hum.	27°C/58%
Test Voltage	DC 3.3V (Via Notebook PC)		
Antenna	PCB Antenna		

Data: 4 File: D:\test data\REPORT\2017\IC1M1707XXX\IC1M1707267-C-D-RF-1.EM6 (4)

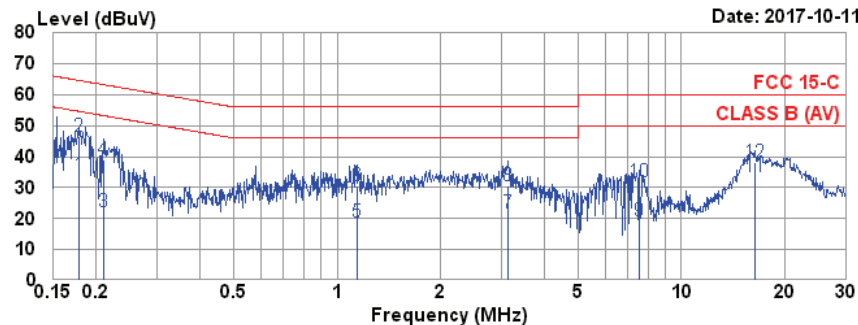

Site no. : No.7 Shielded Room Data no. : 4
Condition : ESH2-Z5 366(ADAPTER) Phase : NEUTRAL
Limit : FCC 15-C
Env. / Ins. : 27°C / 58% ESCI(1276) Engineer : Nick Du
EUT : SDC-PE15N
Power Rating : DC 3.3V
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.179	0.18	0.04	9.86	23.94	34.02	54.55	20.53	Average
2	0.179	0.18	0.04	9.86	36.42	46.50	64.55	18.05	QP
3	0.209	0.17	0.04	9.86	12.31	22.38	53.23	30.85	Average
4	0.209	0.17	0.04	9.86	28.75	38.82	63.23	24.41	QP
5	1.141	0.23	0.06	9.86	8.61	18.76	46.00	27.24	Average
6	1.141	0.23	0.06	9.86	20.33	30.48	56.00	25.52	QP
7	3.140	0.30	0.15	9.87	11.58	21.90	46.00	24.10	Average
8	3.140	0.30	0.15	9.87	20.11	30.43	56.00	25.57	QP
9	7.526	0.46	0.20	9.88	8.95	19.49	50.00	30.51	Average
10	7.526	0.46	0.20	9.88	21.23	31.77	60.00	28.23	QP
11	16.398	0.86	0.29	9.93	22.42	33.50	50.00	16.50	Average
12	16.398	0.86	0.29	9.93	27.21	38.29	60.00	21.71	QP


Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2017/10/11	Temp./Hum.	27°C/58%
Test Voltage	DC 3.3V (Via Notebook PC)		
Antenna	PCB Antenna		

Data: 3 File: D:\test data\REPORT\2017\IC1M1707XXX\IC1M1707267-C-D-RF-1.EM6 (4)

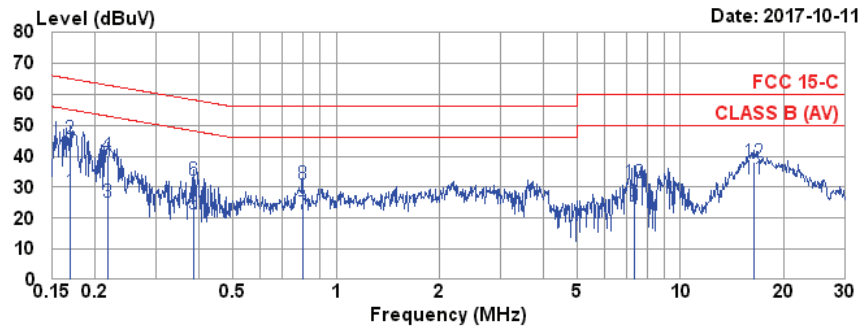

Site no. : No.7 Shielded Room Data no. : 3
Condition : ESH2-Z5 366(ADAPTER) Phase : LINE
Limit : FCC 15-C
Env. / Ins. : 27°C / 58% ESCI(1276) Engineer : Nick Du
EUT : SDC-PE15N
Power Rating : DC 3.3V
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.169	0.17	0.03	9.86	18.52	28.58	55.03	26.45	Average
2	0.169	0.17	0.03	9.86	35.73	45.79	65.03	19.24	QP
3	0.217	0.16	0.04	9.86	15.22	25.28	52.92	27.64	Average
4	0.217	0.16	0.04	9.86	30.15	40.21	62.92	22.71	QP
5	0.385	0.18	0.04	9.86	11.16	21.24	48.17	26.93	Average
6	0.385	0.18	0.04	9.86	22.27	32.35	58.17	25.82	QP
7	0.800	0.20	0.05	9.86	11.18	21.29	46.00	24.71	Average
8	0.800	0.20	0.05	9.86	20.75	30.86	56.00	25.14	QP
9	7.368	0.49	0.20	9.88	13.12	23.69	50.00	26.31	Average
10	7.368	0.49	0.20	9.88	20.74	31.31	60.00	28.69	QP
11	16.312	0.96	0.29	9.93	21.40	32.58	50.00	17.42	Average
12	16.312	0.96	0.29	9.93	26.98	38.16	60.00	21.84	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2017/09/27	Temp./Hum.	23°C/48%
Test Voltage	DC 3.3V (Via Notebook PC)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1 GHz

Antenna: PCB Antenna

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5260MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.94	23.76	1.25	1.74	26.75	40.00	13.25	Peak
138.64	17.87	2.71	8.02	28.60	43.50	14.90	Peak
232.73	18.04	3.66	19.17	40.87	46.00	5.13	Peak
399.57	22.04	5.54	4.24	31.82	46.00	14.18	Peak
665.35	24.80	6.97	6.54	38.31	46.00	7.69	Peak
992.24	27.76	8.79	2.66	39.21	54.00	14.79	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
47.46	15.81	1.53	9.62	26.96	40.00	13.04	Peak
107.60	18.02	2.36	9.40	29.78	43.50	13.72	Peak
398.60	22.04	5.54	4.99	32.57	46.00	13.43	Peak
700.27	24.87	7.08	2.45	34.40	46.00	11.60	Peak
892.33	26.76	8.14	2.01	36.91	46.00	9.09	Peak
987.39	27.69	8.74	1.70	38.13	54.00	15.87	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Antenna: Omni-S Antenna

Mode	802.11a	UNII Band	III
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
34.85	22.37	1.31	1.54	25.22	40.00	14.78	Peak
165.80	16.06	2.99	9.25	28.30	43.50	15.20	Peak
232.73	18.04	3.66	13.27	34.97	46.00	11.03	Peak
331.67	20.37	4.74	8.05	33.16	46.00	12.84	Peak
699.30	24.87	7.08	7.19	39.14	46.00	6.86	Peak
985.45	27.69	8.74	2.69	39.12	54.00	14.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
32.91	23.32	1.26	8.33	32.91	40.00	7.09	Peak
99.84	17.47	2.27	16.90	36.64	43.50	6.86	Peak
232.73	18.04	3.66	11.06	32.76	46.00	13.24	Peak
398.60	22.04	5.54	7.17	34.75	46.00	11.25	Peak
697.36	24.86	7.07	5.57	37.50	46.00	8.50	Peak
988.36	27.73	8.76	1.66	38.15	54.00	15.85	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


Antenna: PCB Antenna

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

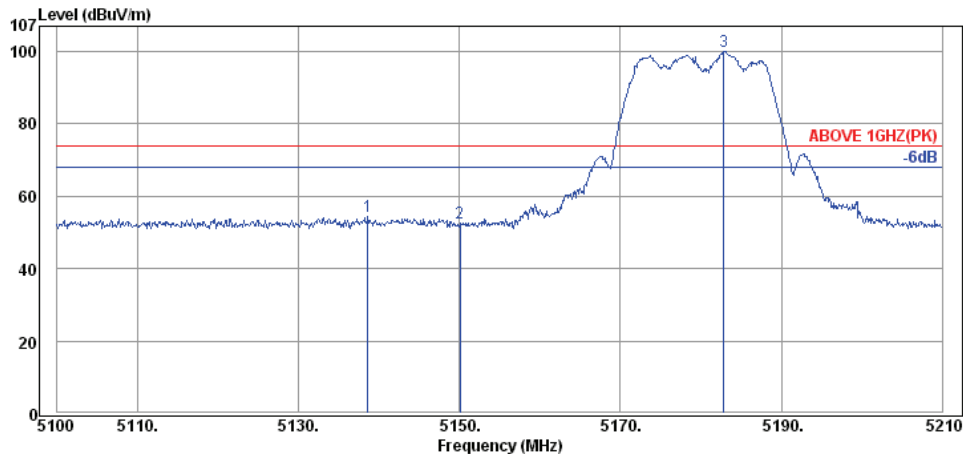

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5138.61	34.43	12.13	8.03	54.59	74.00	19.41	Peak
5150.05	34.45	12.08	5.87	52.40	74.00	21.60	Peak
5182.83	34.48	11.99	53.66	100.13	---	---	Peak

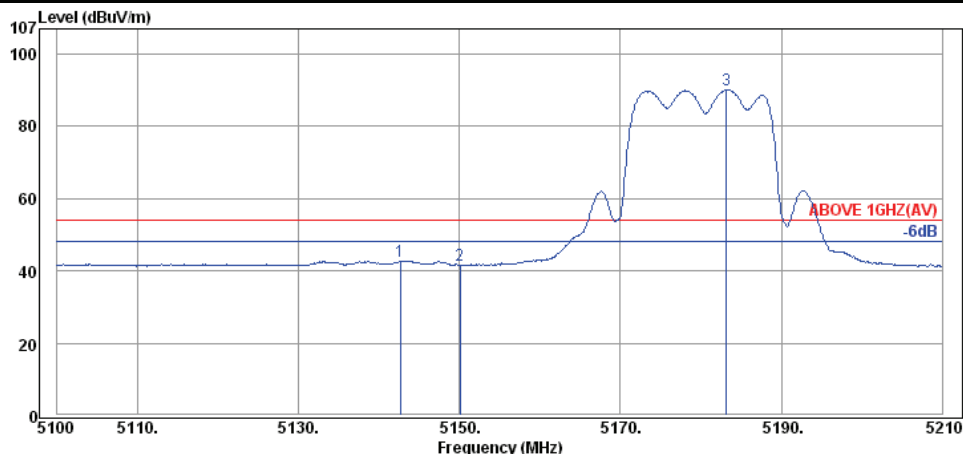


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.68	34.45	12.08	-3.76	42.77	54.00	11.23	Average
5150.05	34.45	12.08	-4.99	41.54	54.00	12.46	Average
5183.16	34.48	11.99	43.75	90.22	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

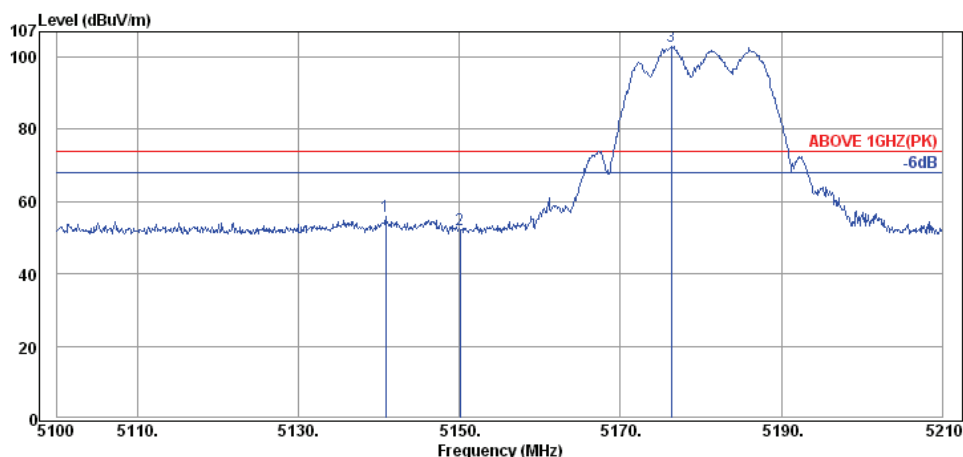

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.81	34.45	12.08	9.23	55.76	74.00	18.24	Peak
5150.05	34.45	12.08	5.71	52.24	74.00	21.76	Peak
5176.34	34.48	11.99	56.58	103.05	---	---	Peak

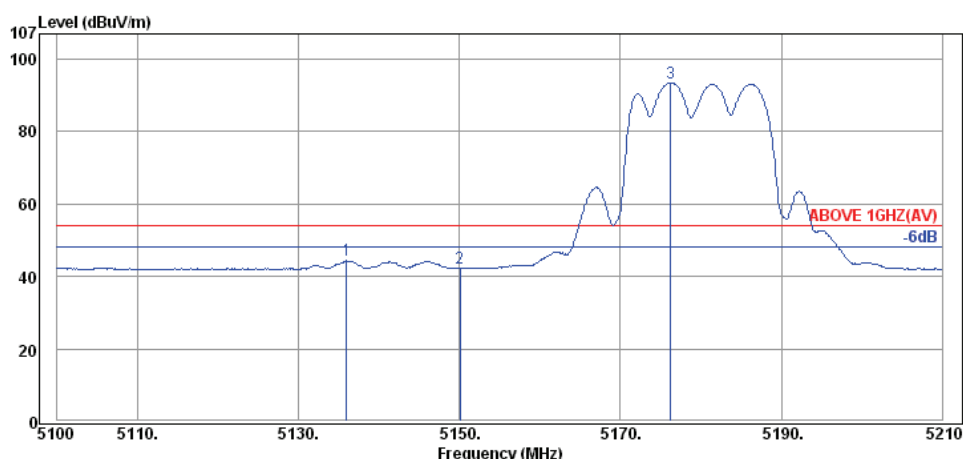


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.97	34.43	12.13	-2.25	44.31	54.00	9.69	Average
5150.05	34.45	12.08	-4.31	42.22	54.00	11.78	Average
5176.23	34.48	11.99	47.08	93.55	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

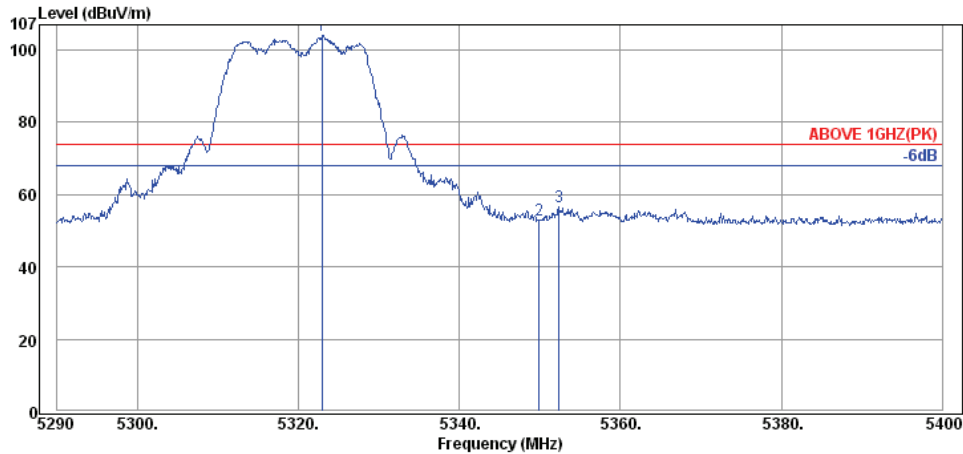

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5322.89	34.62	11.74	57.63	103.99	---	---	Peak
5349.95	34.65	11.75	6.65	53.05	74.00	20.95	Peak
5352.37	34.65	11.75	10.30	56.70	74.00	17.30	Peak

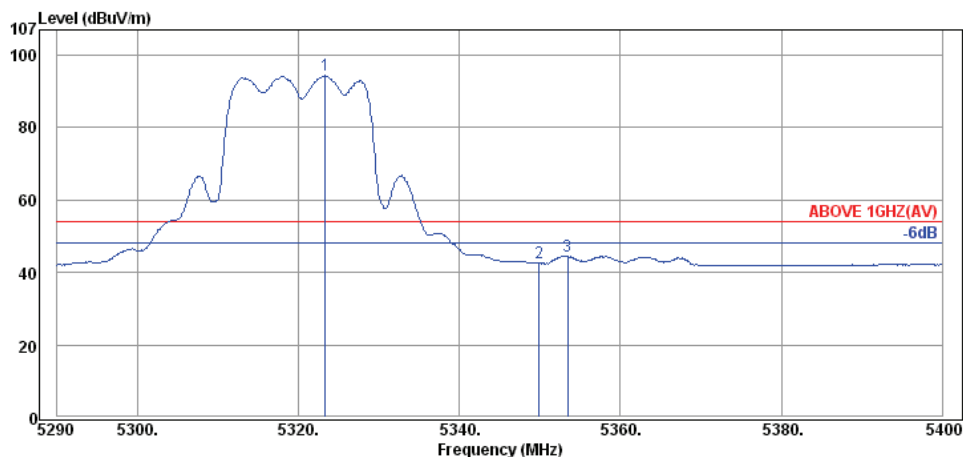


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5323.33	34.62	11.74	47.99	94.35	---	---	Average
5349.95	34.65	11.75	-3.92	42.48	54.00	11.52	Average
5353.47	34.65	11.75	-1.91	44.49	54.00	9.51	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

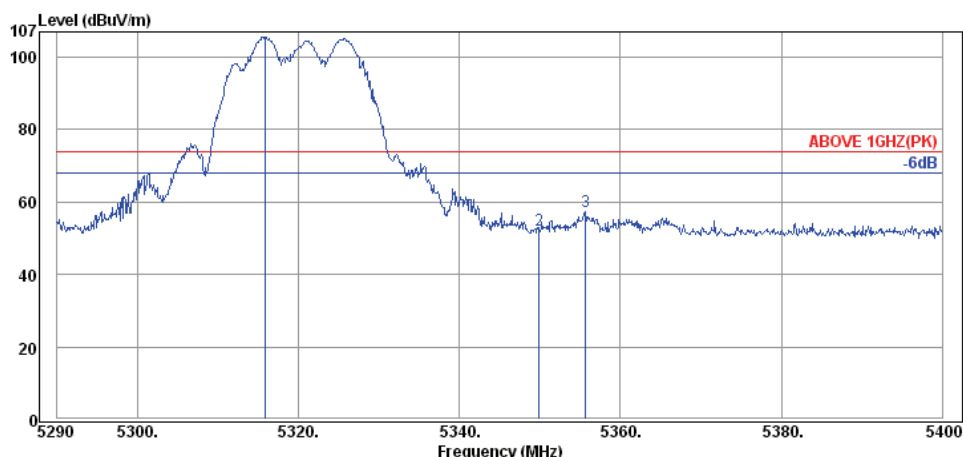

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.85	34.62	11.74	59.13	105.49	---	---	Peak
5349.95	34.65	11.75	5.66	52.06	74.00	21.94	Peak
5355.67	34.65	11.75	10.83	57.23	74.00	16.77	Peak

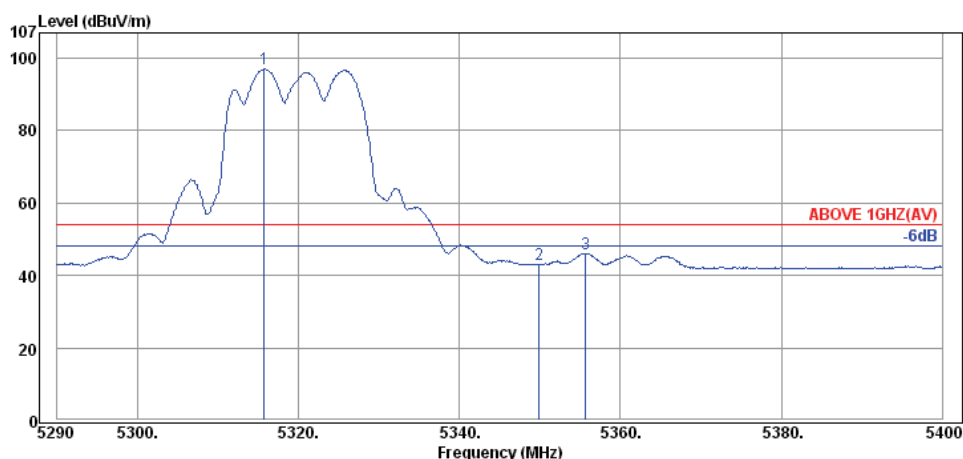


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.74	34.62	11.74	50.61	96.97	---	---	Average
5349.95	34.65	11.75	-3.38	43.02	54.00	10.98	Average
5355.67	34.65	11.75	-0.31	46.09	54.00	7.91	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

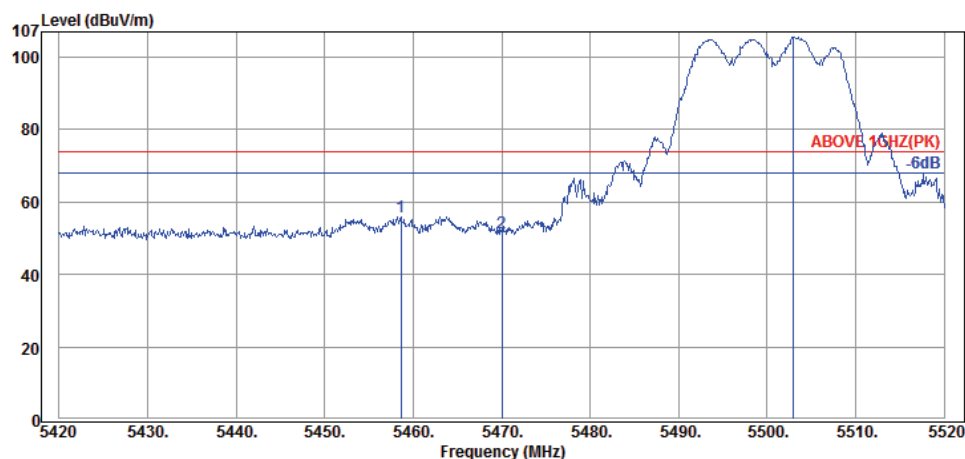

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.60	34.75	10.28	10.91	55.94	74.00	18.06	Peak
5470.00	34.77	10.30	6.23	51.30	74.00	22.70	Peak
5502.90	34.80	10.35	60.42	105.57	---	---	Peak

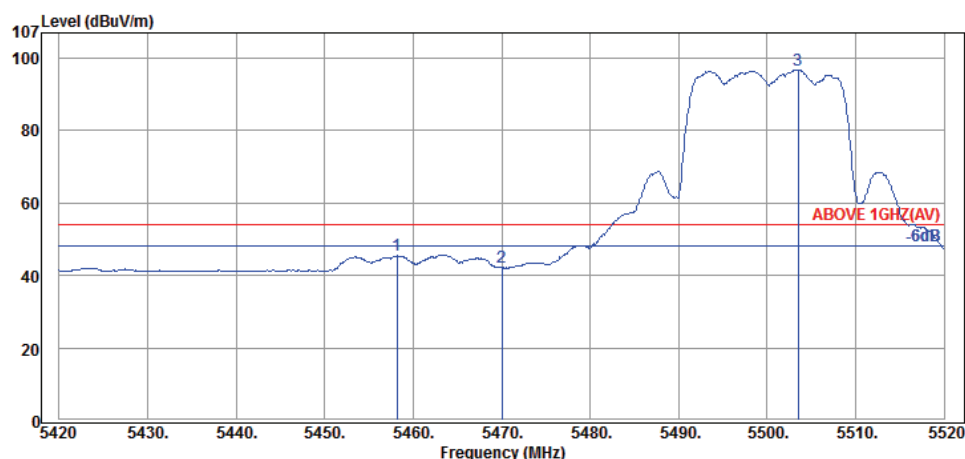


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.20	34.75	10.28	0.41	45.44	54.00	8.56	Average
5470.00	34.77	10.30	-2.91	42.16	54.00	11.84	Average
5503.50	34.80	10.35	51.59	96.74	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

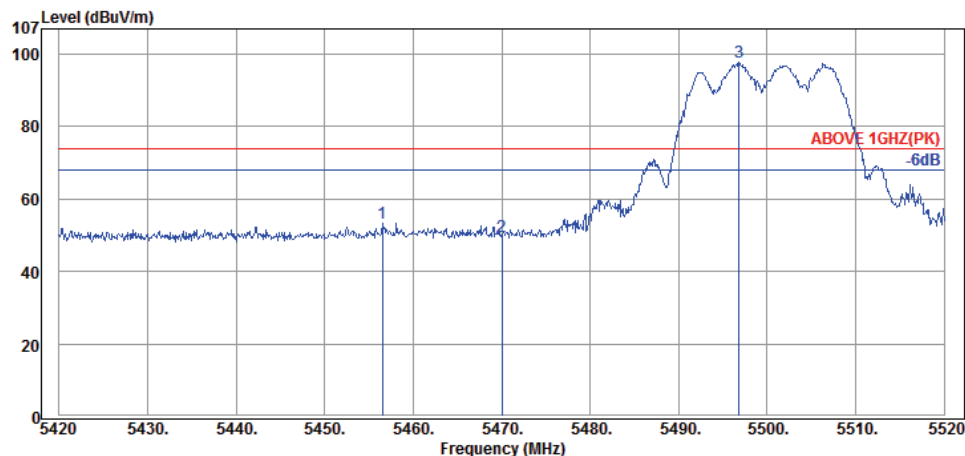

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.50	34.75	10.28	8.20	53.23	74.00	20.77	Peak
5470.00	34.77	10.30	4.44	49.51	74.00	24.49	Peak
5496.80	34.80	10.35	52.83	97.98	---	---	Peak

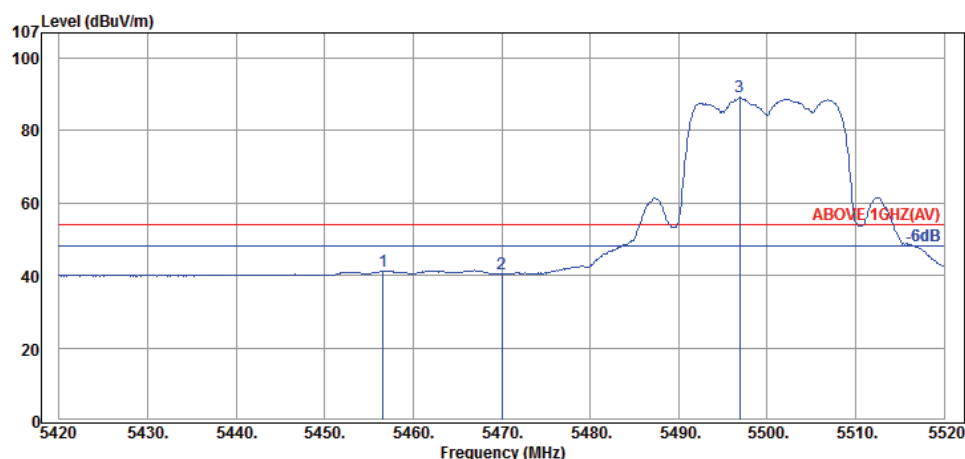


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.60	34.75	10.28	-3.75	41.28	54.00	12.72	Average
5470.00	34.77	10.30	-4.72	40.35	54.00	13.65	Average
5496.90	34.80	10.35	44.06	89.21	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

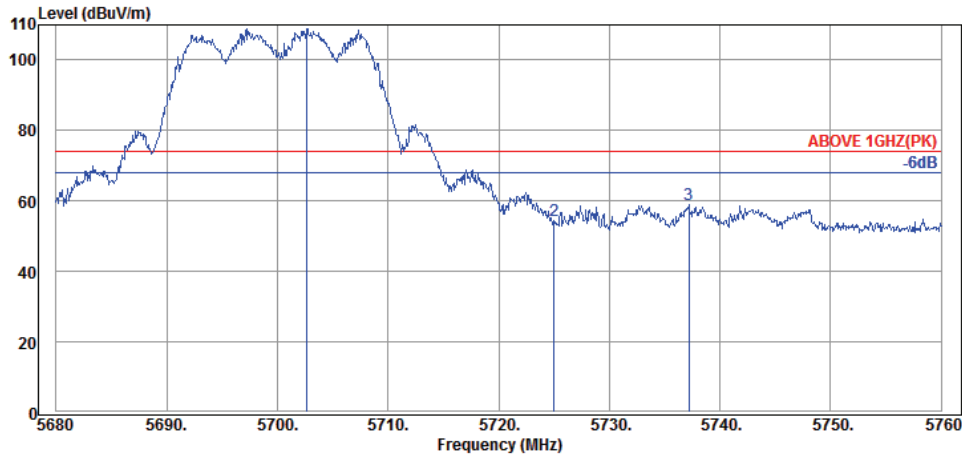

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.64	35.05	10.51	63.46	109.02	74.00	---	Peak
5725.04	35.07	10.52	8.84	54.43	74.00	19.57	Peak
5737.20	35.09	10.54	13.44	59.07	74.00	14.93	Peak

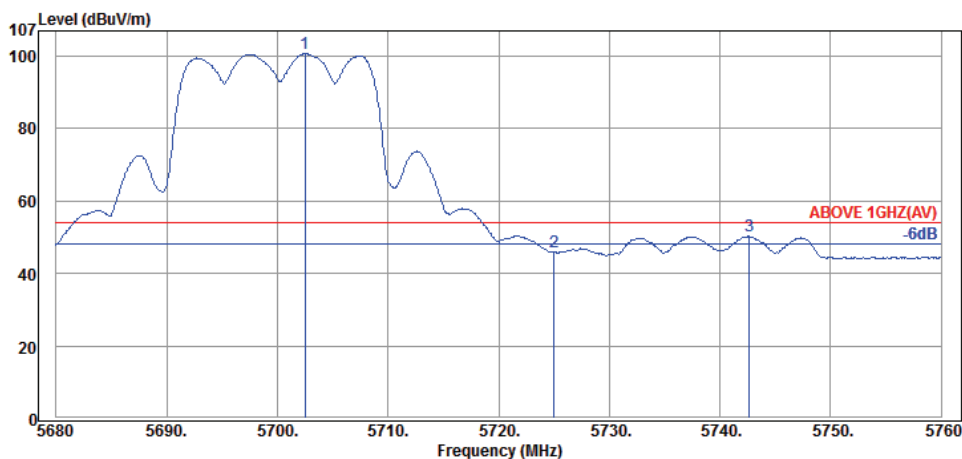


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.48	35.05	10.51	55.16	100.72	54.00	---	Average
5725.04	35.07	10.52	0.39	45.98	54.00	8.02	Average
5742.64	35.09	10.54	4.70	50.33	54.00	3.67	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

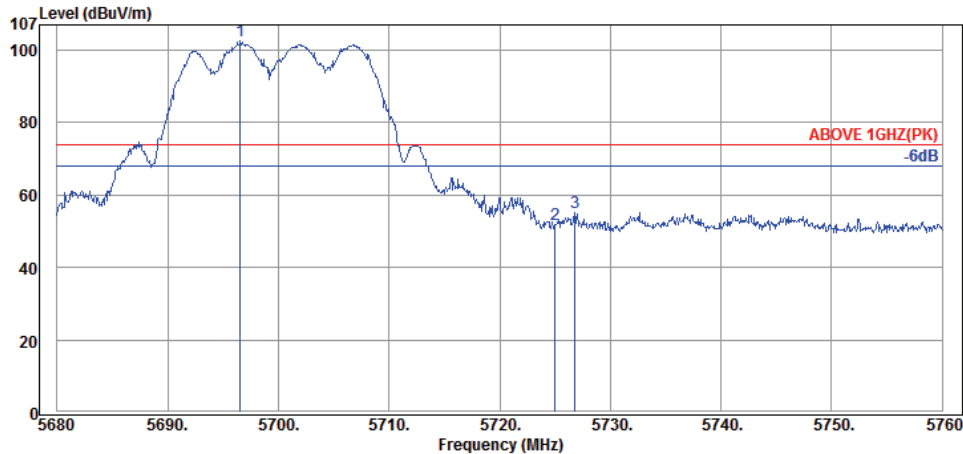

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5696.56	35.03	10.50	57.05	102.58	74.00	---	Peak
5725.04	35.07	10.52	6.23	51.82	74.00	22.18	Peak
5726.80	35.07	10.52	9.57	55.16	74.00	18.84	Peak

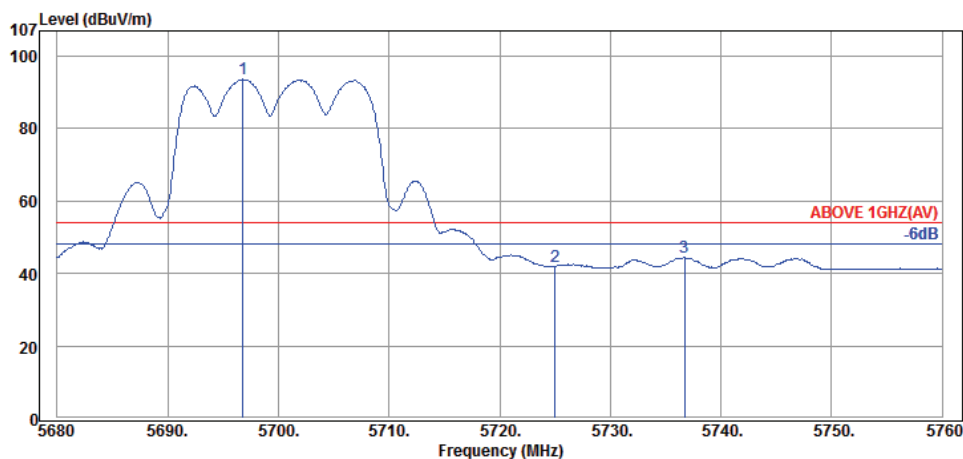


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5696.80	35.03	10.50	48.07	93.60	54.00	---	Average
5725.04	35.07	10.52	-3.62	41.97	54.00	12.03	Average
5736.72	35.09	10.54	-1.15	44.48	54.00	9.52	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

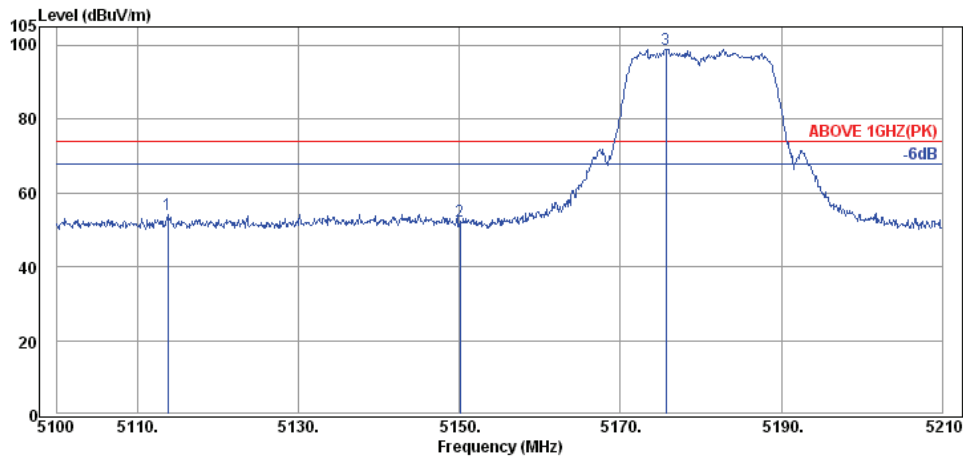

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5113.75	34.42	12.18	7.69	54.29	74.00	19.71	Peak
5150.05	34.45	12.08	5.67	52.20	74.00	21.80	Peak
5175.68	34.48	11.99	52.53	99.00	---	---	Peak

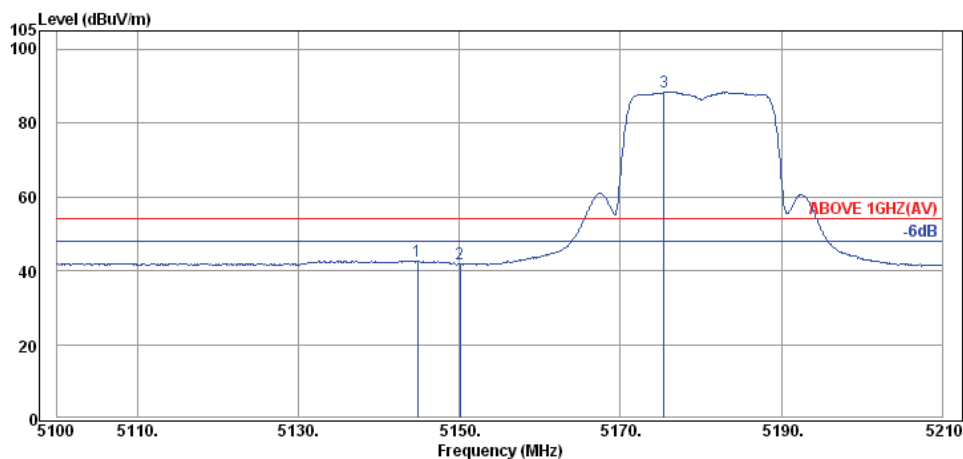


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.77	34.45	12.08	-3.89	42.64	54.00	11.36	Average
5150.05	34.45	12.08	-4.71	41.82	54.00	12.18	Average
5175.46	34.48	11.99	41.93	88.40	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

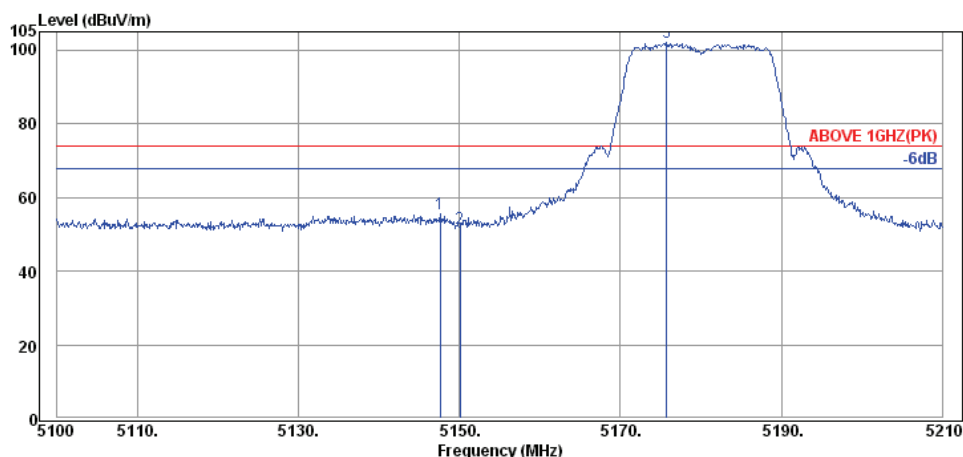

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.63	34.45	12.08	8.89	55.42	74.00	18.58	Peak
5150.05	34.45	12.08	5.21	51.74	74.00	22.26	Peak
5175.79	34.48	11.99	55.80	102.27	---	---	Peak

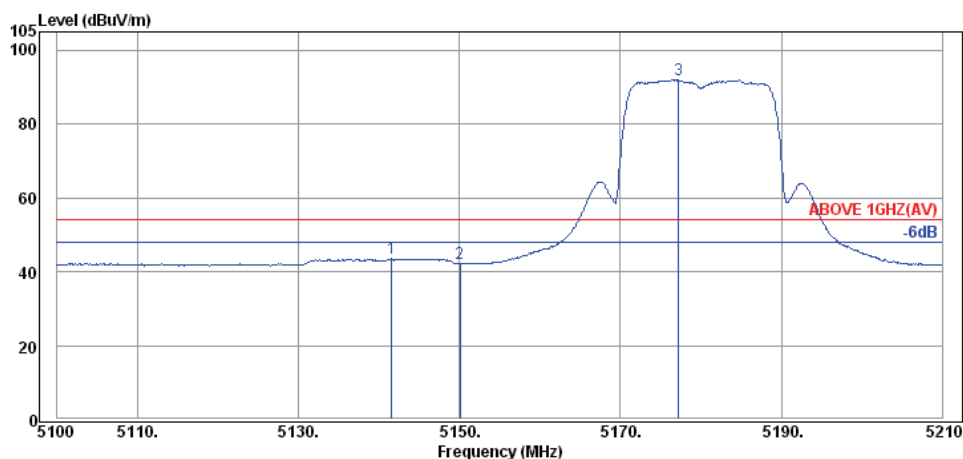


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.58	34.45	12.08	-2.97	43.56	54.00	10.44	Average
5150.05	34.45	12.08	-4.37	42.16	54.00	11.84	Average
5177.22	34.48	11.99	45.50	91.97	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

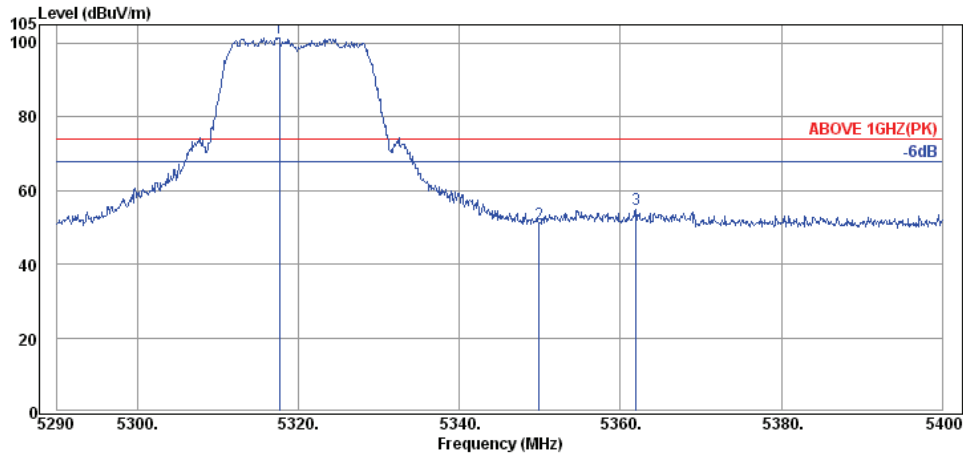

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.61	34.62	11.74	55.18	101.54	---	---	Peak
5349.95	34.65	11.75	4.42	50.82	74.00	23.18	Peak
5361.94	34.67	11.75	8.48	54.90	74.00	19.10	Peak

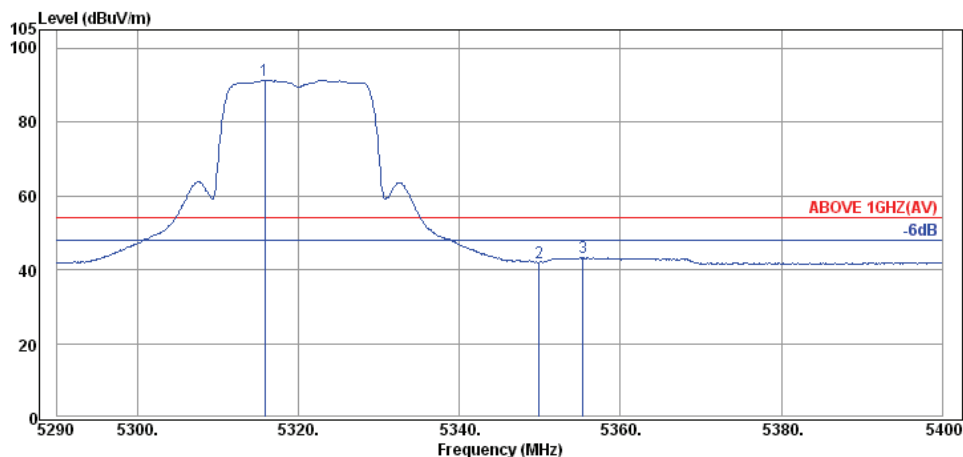


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.85	34.62	11.74	45.00	91.36	---	---	Average
5349.95	34.65	11.75	-4.40	42.00	54.00	12.00	Average
5355.34	34.65	11.75	-3.15	43.25	54.00	10.75	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

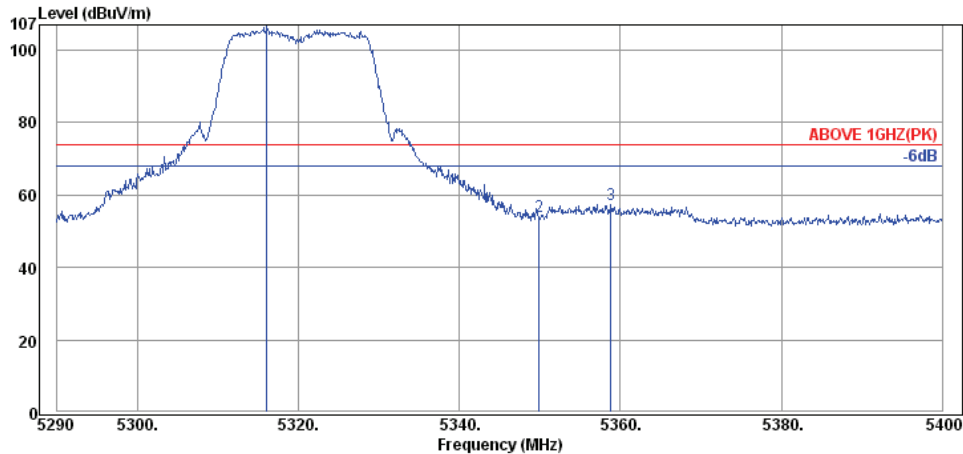

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.07	34.62	11.74	60.13	106.49	---	---	Peak
5349.95	34.65	11.75	7.60	54.00	74.00	20.00	Peak
5358.86	34.65	11.75	10.90	57.30	74.00	16.70	Peak

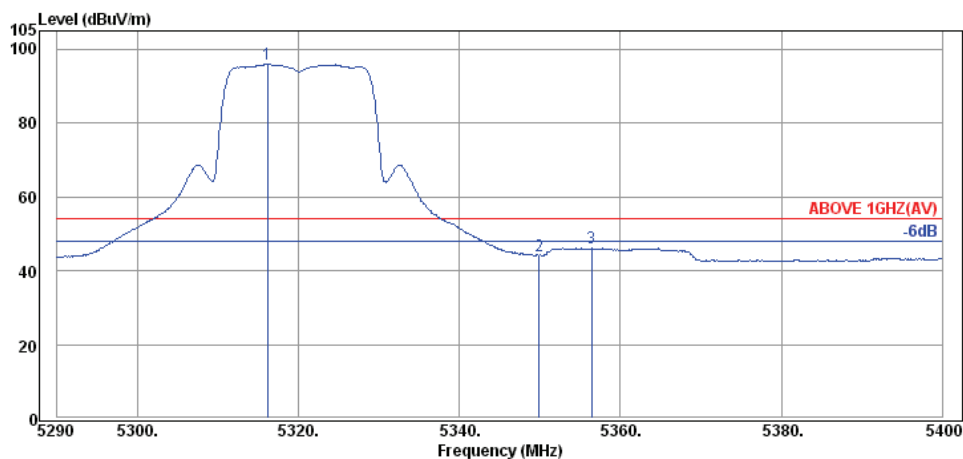


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.18	34.62	11.74	49.52	95.88	---	---	Average
5349.95	34.65	11.75	-2.38	44.02	54.00	9.98	Average
5356.44	34.65	11.75	-0.27	46.13	54.00	7.87	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

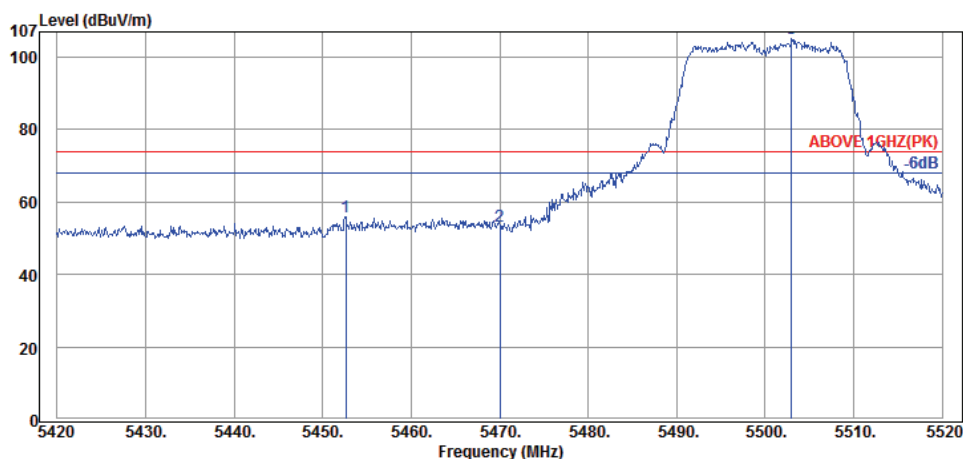

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.60	34.75	11.92	9.21	55.88	74.00	18.12	Peak
5470.00	34.77	11.98	6.60	53.35	74.00	20.65	Peak
5503.00	34.80	12.03	58.35	105.18	---	---	Peak

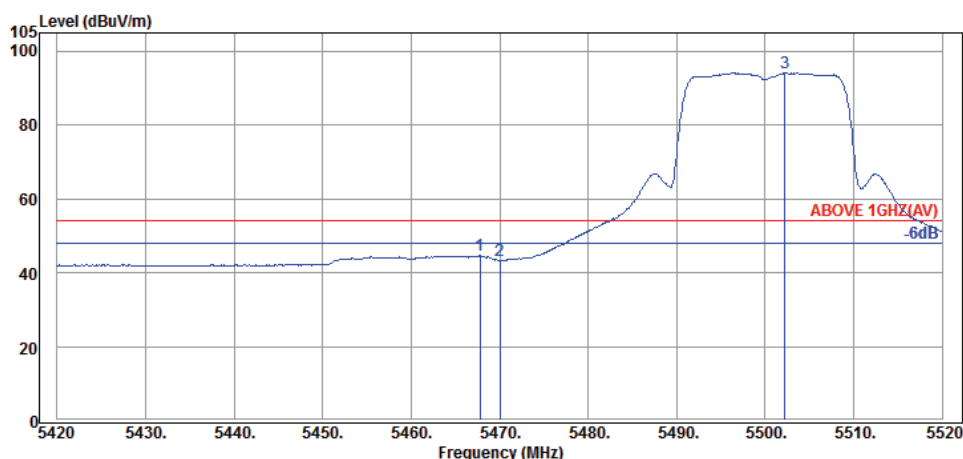


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.80	34.77	11.92	-2.07	44.62	54.00	9.38	Average
5470.00	34.77	11.98	-3.54	43.21	54.00	10.79	Average
5502.20	34.80	12.03	47.38	94.21	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

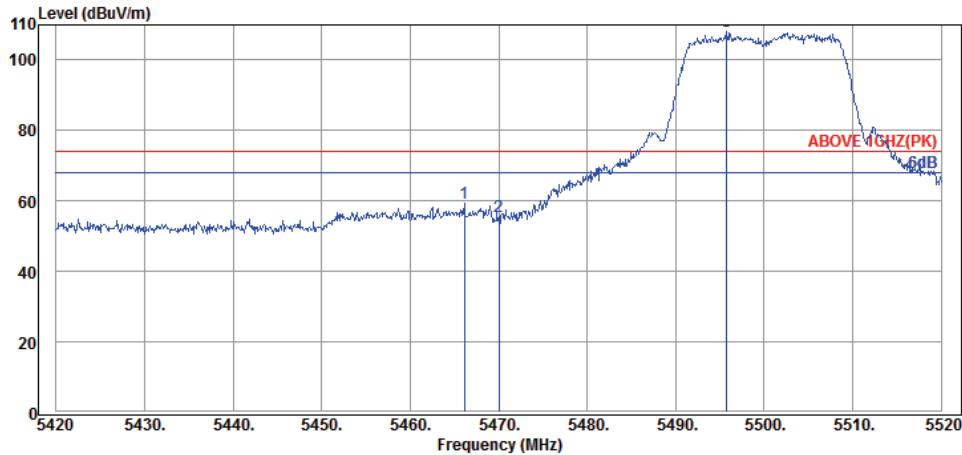

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.10	34.77	11.92	12.84	59.53	74.00	14.47	Peak
5470.00	34.77	11.98	8.78	55.53	74.00	18.47	Peak
5495.80	34.78	12.03	61.13	107.94	---	---	Peak

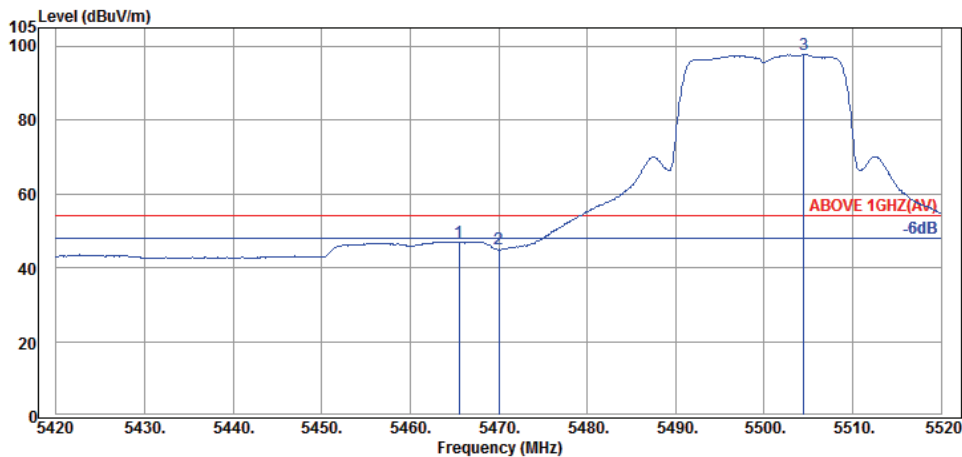


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.50	34.77	11.92	0.33	47.02	54.00	6.98	Average
5470.00	34.77	11.98	-1.79	44.96	54.00	9.04	Average
5504.50	34.80	12.03	50.97	97.80	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

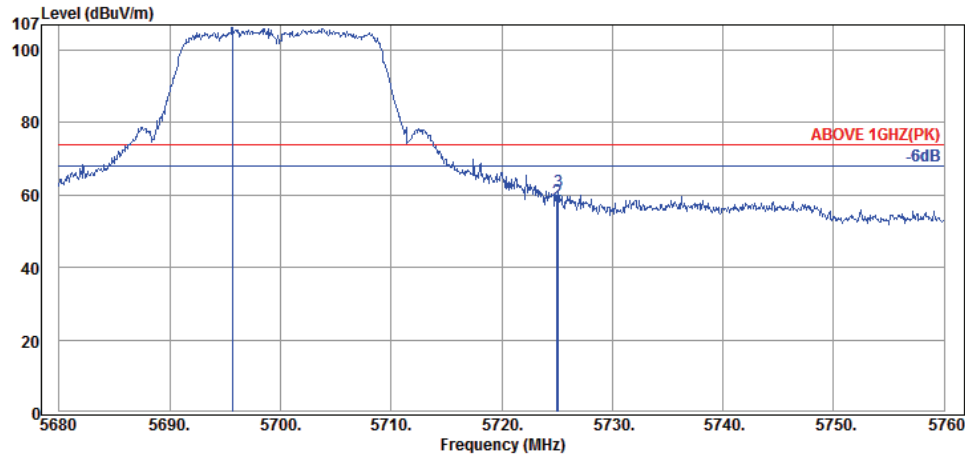

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5695.68	35.03	12.75	58.40	106.18	74.00	---	Peak
5725.04	35.07	12.83	10.40	58.30	74.00	15.70	Peak
5725.12	35.07	12.83	13.28	61.18	74.00	12.82	Peak

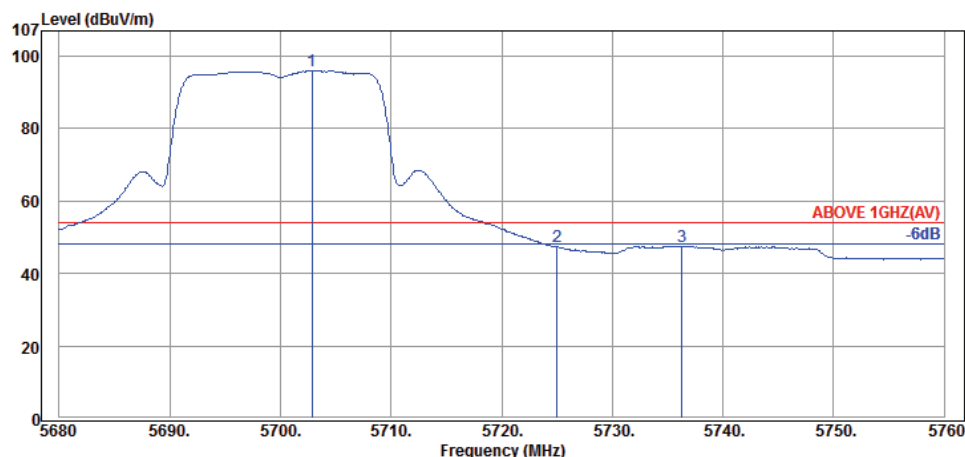


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.88	35.05	12.75	48.18	95.98	54.00	---	Average
5725.04	35.07	12.83	-0.62	47.28	54.00	6.72	Average
5736.32	35.09	12.83	-0.37	47.55	54.00	6.45	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

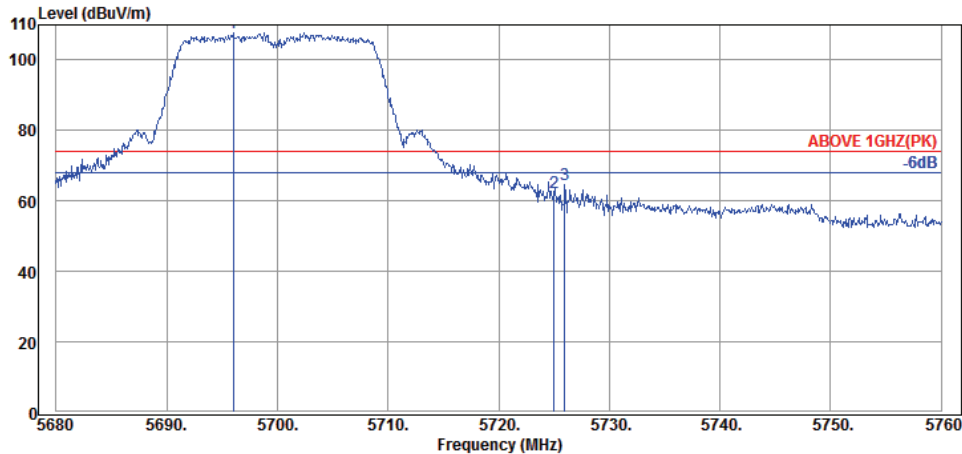

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5696.00	35.03	12.75	60.07	107.85	74.00	---	Peak
5725.04	35.07	12.83	14.48	62.38	74.00	11.62	Peak
5726.00	35.07	12.83	16.79	64.69	74.00	9.31	Peak

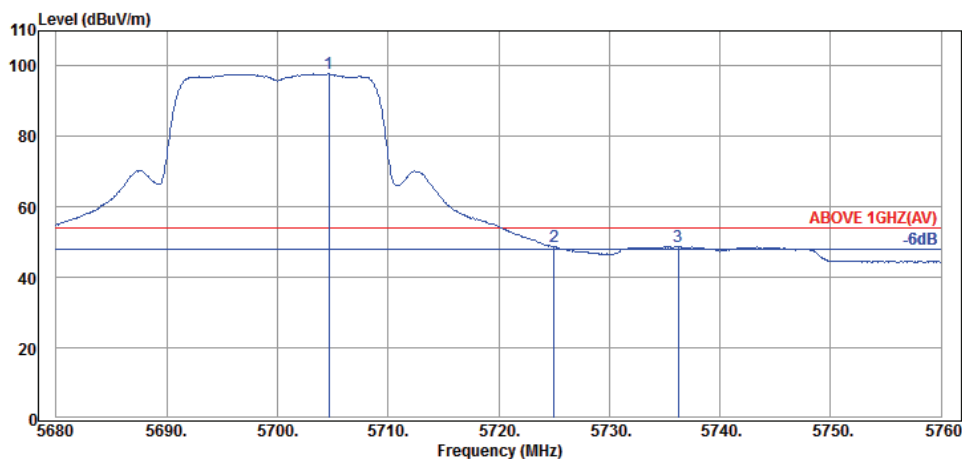


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5704.64	35.05	12.75	50.03	97.83	54.00	---	Average
5725.04	35.07	12.83	0.84	48.74	54.00	5.26	Average
5736.24	35.09	12.83	0.83	48.75	54.00	5.25	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

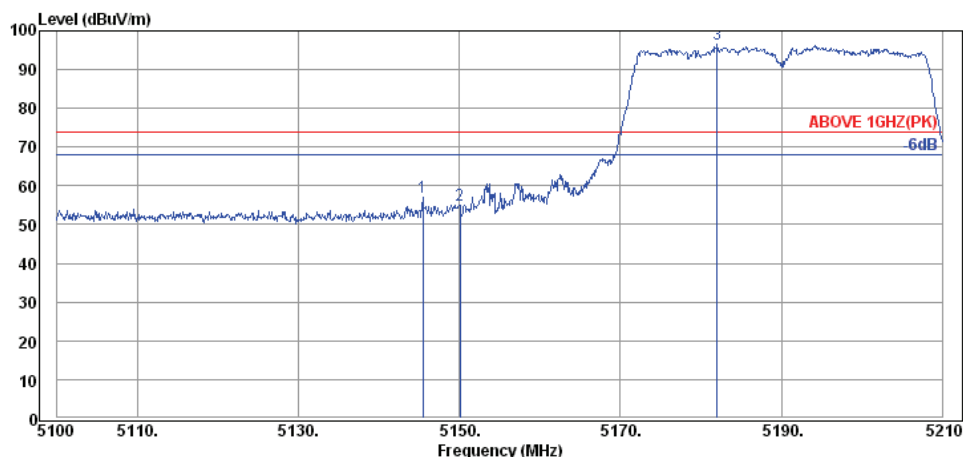

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.43	34.45	12.08	10.37	56.90	74.00	17.10	Peak
5150.05	34.45	12.08	8.34	54.87	74.00	19.13	Peak
5182.06	34.48	11.99	49.93	96.40	---	---	Peak

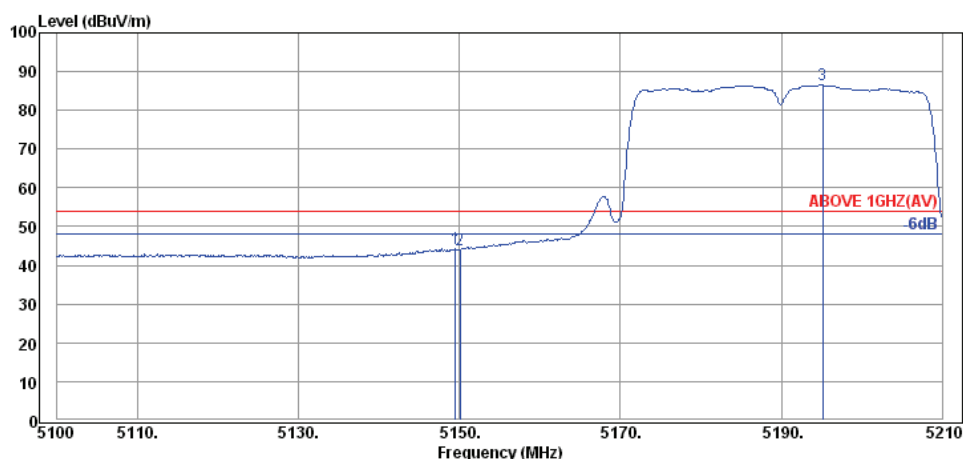


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	34.45	12.08	-2.32	44.21	54.00	9.79	Average
5150.05	34.45	12.08	-2.41	44.12	54.00	9.88	Average
5195.15	34.50	11.95	40.06	86.51	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

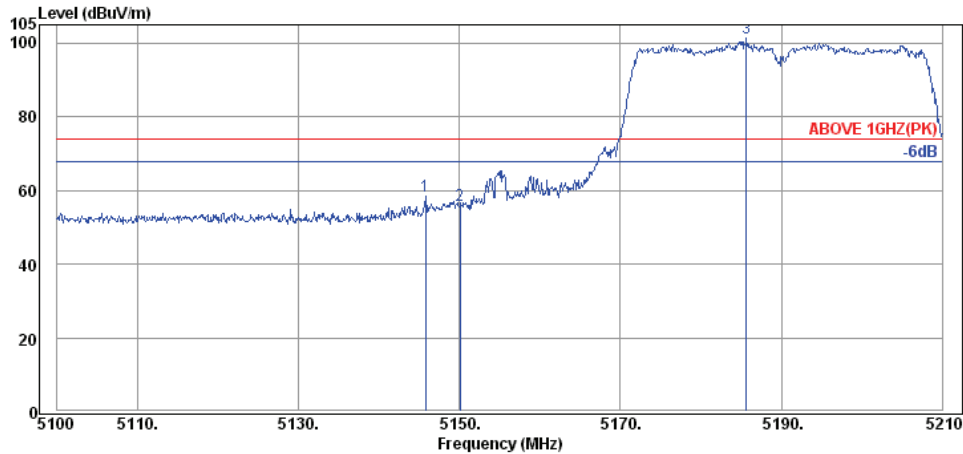

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.76	34.45	12.08	11.90	58.43	74.00	15.57	Peak
5150.05	34.45	12.08	9.42	55.95	74.00	18.05	Peak
5185.69	34.48	11.99	54.79	101.26	---	---	Peak

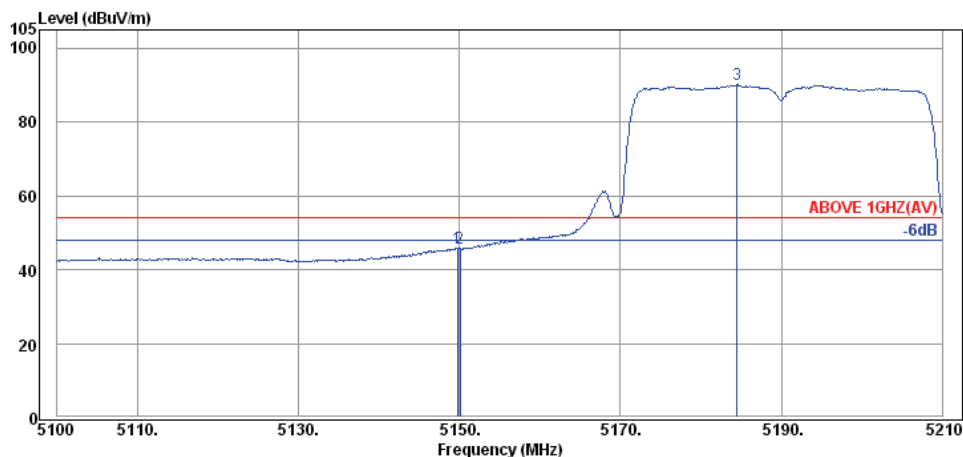


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.72	34.45	12.08	-0.70	45.83	54.00	8.17	Average
5150.05	34.45	12.08	-0.88	45.65	54.00	8.35	Average
5184.48	34.48	11.99	43.59	90.06	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

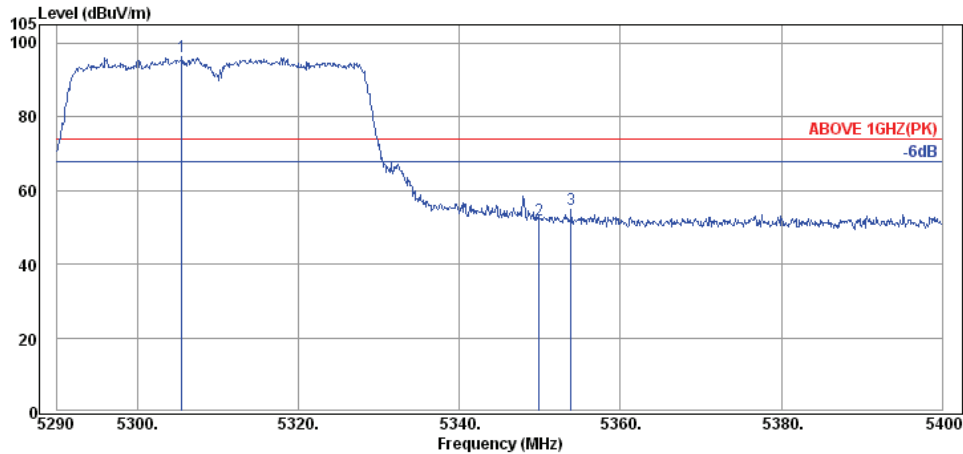

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5305.51	34.60	11.73	49.86	96.19	---	---	Peak
5349.95	34.65	11.75	5.38	51.78	74.00	22.22	Peak
5353.91	34.65	11.75	8.42	54.82	74.00	19.18	Peak

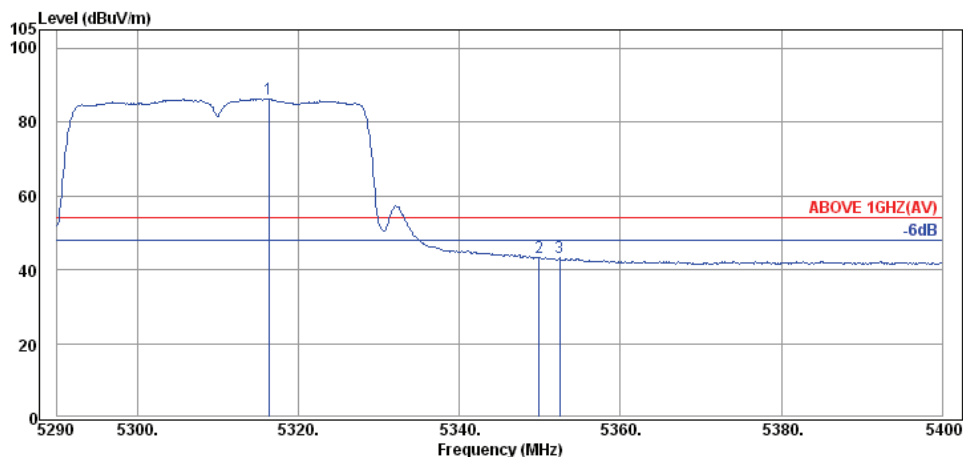


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.29	34.62	11.74	39.92	86.28	---	---	Average
5349.95	34.65	11.75	-3.17	43.23	54.00	10.77	Average
5352.48	34.65	11.75	-3.18	43.22	54.00	10.78	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

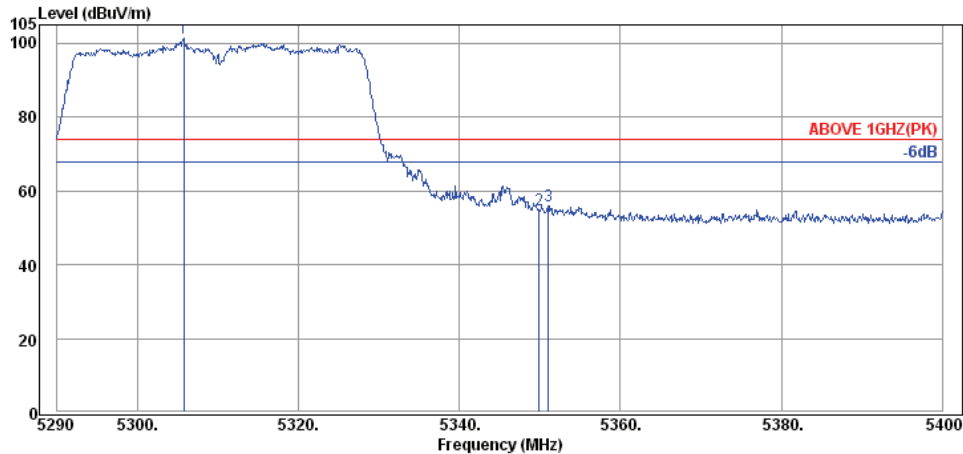

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5305.73	34.60	11.73	54.91	101.24	---	---	Peak
5349.95	34.65	11.75	8.36	54.76	74.00	19.24	Peak
5351.05	34.65	11.75	9.51	55.91	74.00	18.09	Peak

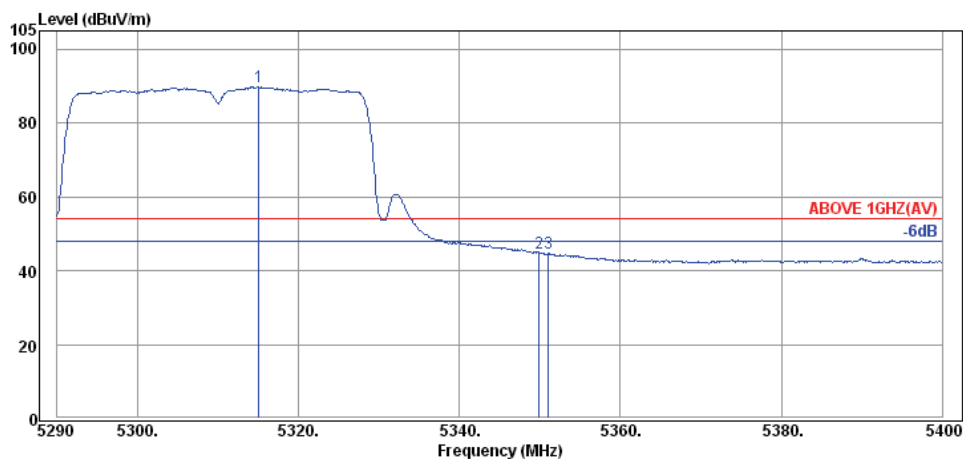

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.08	34.62	11.74	43.46	89.82	---	---	Average
5349.95	34.65	11.75	-1.56	44.84	54.00	9.16	Average
5351.05	34.65	11.75	-1.70	44.70	54.00	9.30	Average

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

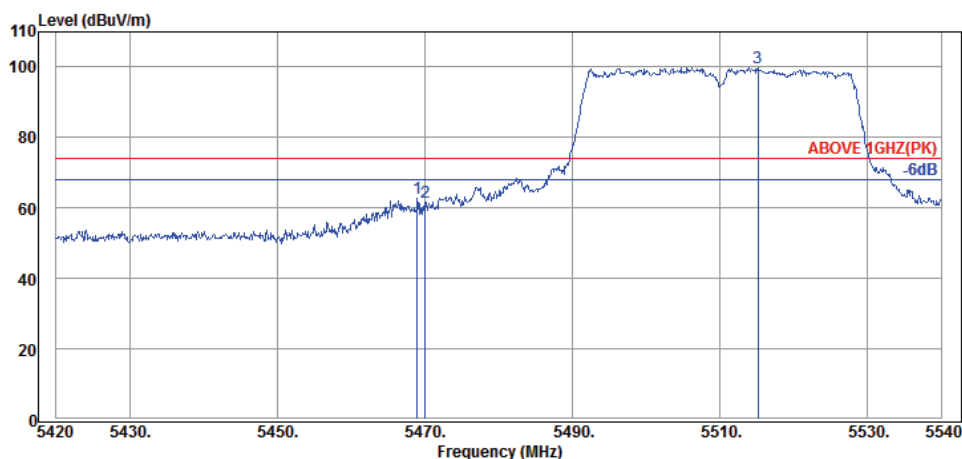

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.96	34.77	10.30	17.63	62.70	74.00	11.30	Peak
5470.04	34.77	10.30	16.58	61.65	74.00	12.35	Peak
5515.16	34.82	10.36	54.62	99.80	---	---	Peak

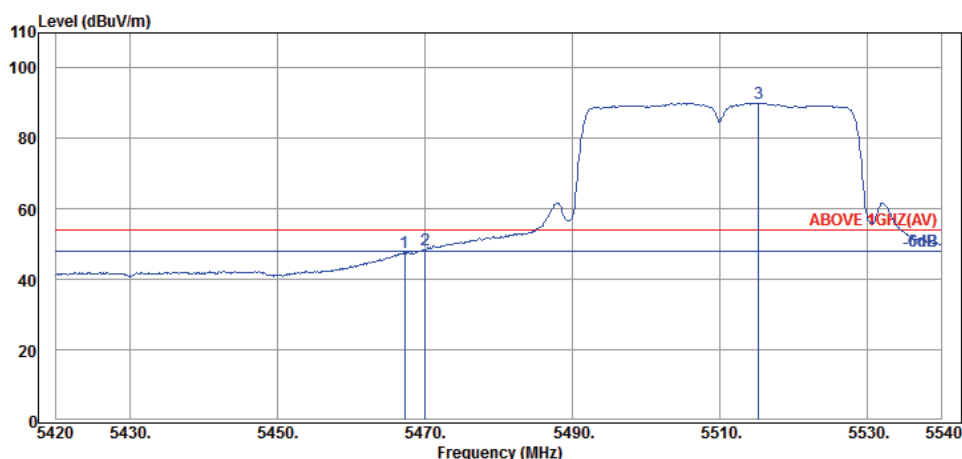


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.28	34.77	10.30	2.53	47.60	54.00	6.40	Average
5470.04	34.77	10.30	3.18	48.25	54.00	5.75	Average
5515.28	34.82	10.36	44.90	90.08	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

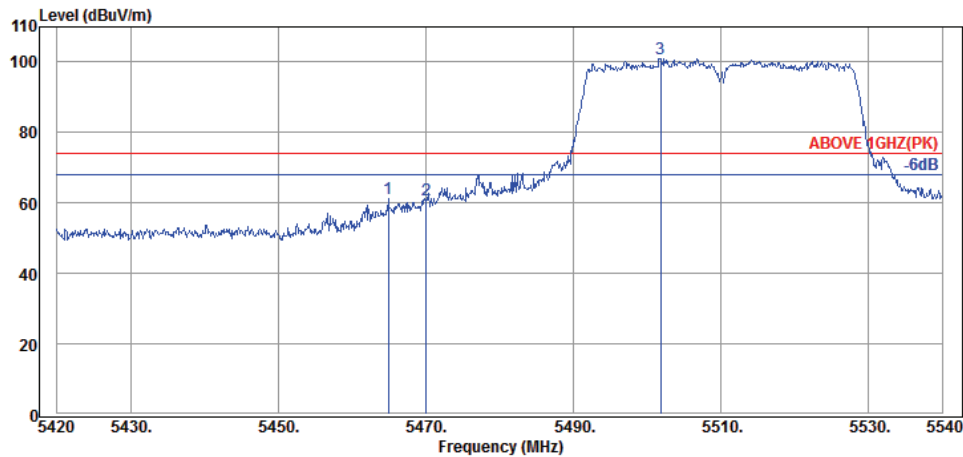

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.88	34.77	10.30	16.34	61.41	74.00	12.59	Peak
5470.04	34.77	10.30	15.93	61.00	74.00	13.00	Peak
5501.84	34.80	10.35	55.92	101.07	---	---	Peak

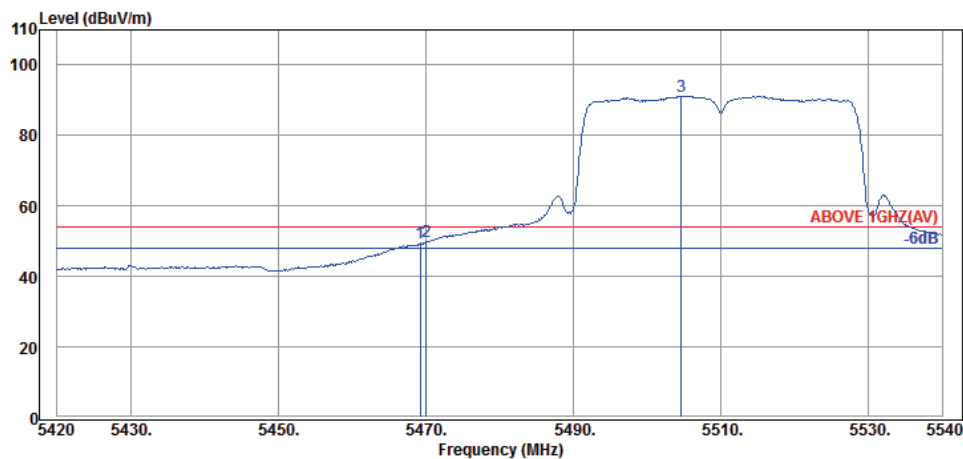


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.20	34.77	10.30	4.37	49.44	54.00	4.56	Average
5470.04	34.77	10.30	4.78	49.85	54.00	4.15	Average
5504.60	34.80	10.35	46.08	91.23	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

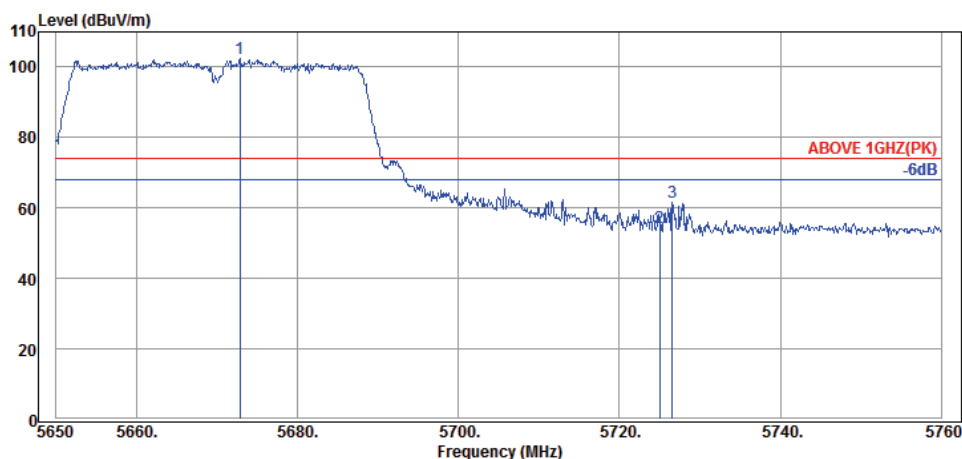

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5676.95	35.01	10.48	55.05	100.54	74.00	---	Peak
5725.02	35.07	10.52	7.13	52.72	74.00	21.28	Peak
5727.77	35.07	10.52	15.02	60.61	74.00	13.39	Peak

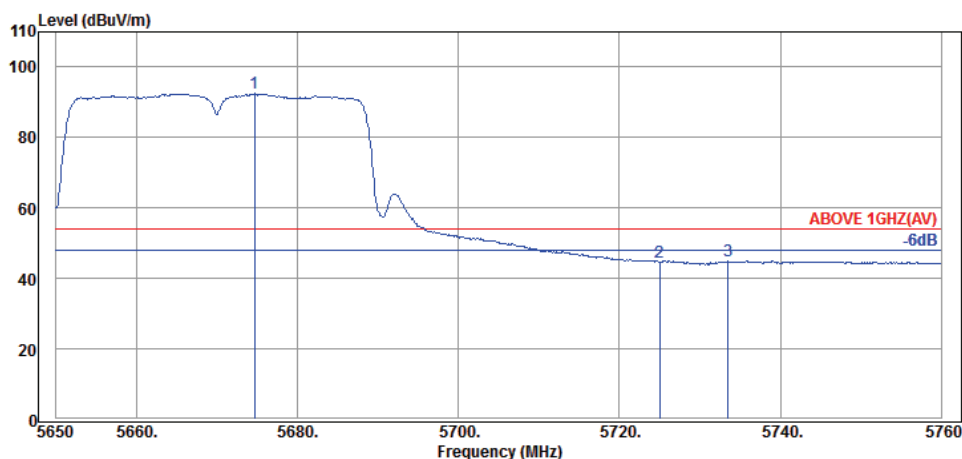


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5675.30	35.01	10.48	45.74	91.23	54.00	---	Average
5725.02	35.07	10.52	-2.54	43.05	54.00	10.95	Average
5726.56	35.07	10.52	-2.34	43.25	54.00	10.75	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

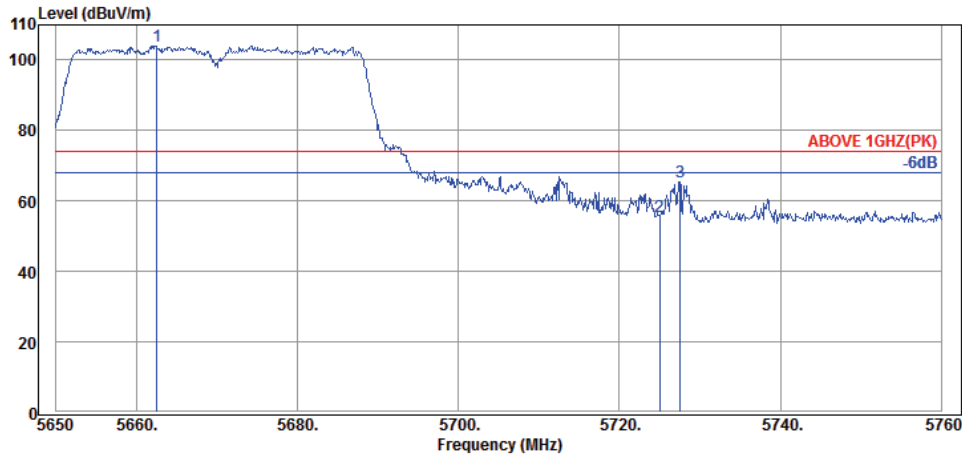

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5661.88	34.99	10.47	54.15	99.61	74.00	---	Peak
5725.02	35.07	10.52	9.10	54.69	74.00	19.31	Peak
5727.44	35.07	10.52	15.50	61.09	74.00	12.91	Peak

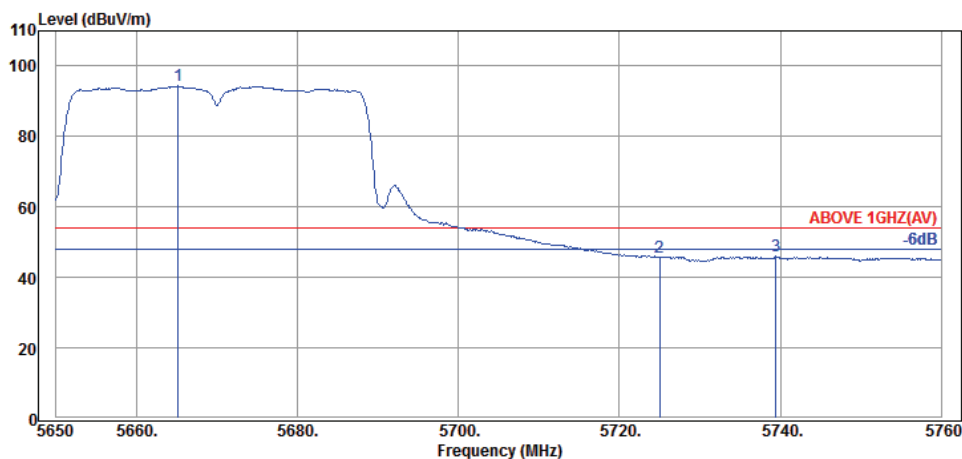

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5664.85	34.99	10.47	44.41	89.87	54.00	---	Average
5725.02	35.07	10.52	-3.01	42.58	54.00	11.42	Average
5725.79	35.07	10.52	-3.00	42.59	54.00	11.41	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303


Antenna: Omni-S Antenna

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

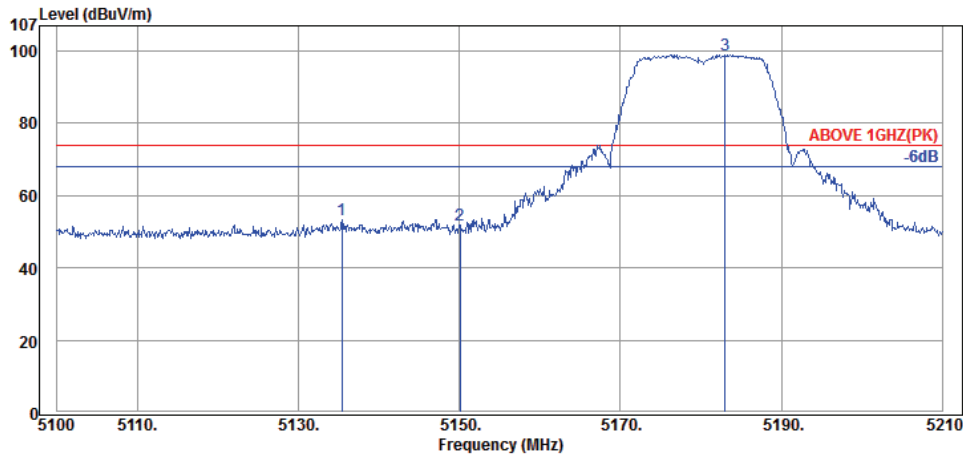

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5135.42	34.43	9.81	9.20	53.44	74.00	20.56	Peak
5150.05	34.45	9.83	7.71	51.99	74.00	22.01	Peak
5183.05	34.48	9.88	54.67	99.03	---	---	Peak

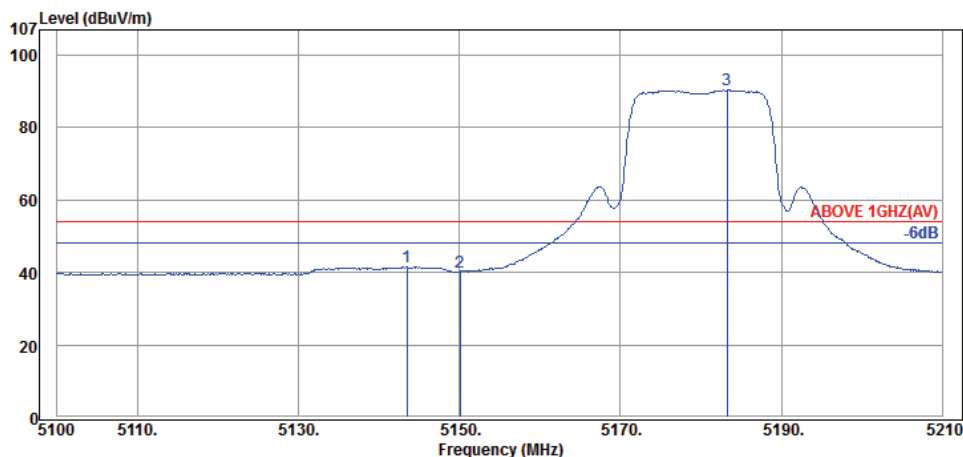

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.45	34.45	9.83	-2.80	41.48	54.00	12.52	Average
5150.05	34.45	9.83	-4.02	40.26	54.00	13.74	Average
5183.27	34.48	9.88	45.98	90.34	---	---	Average

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

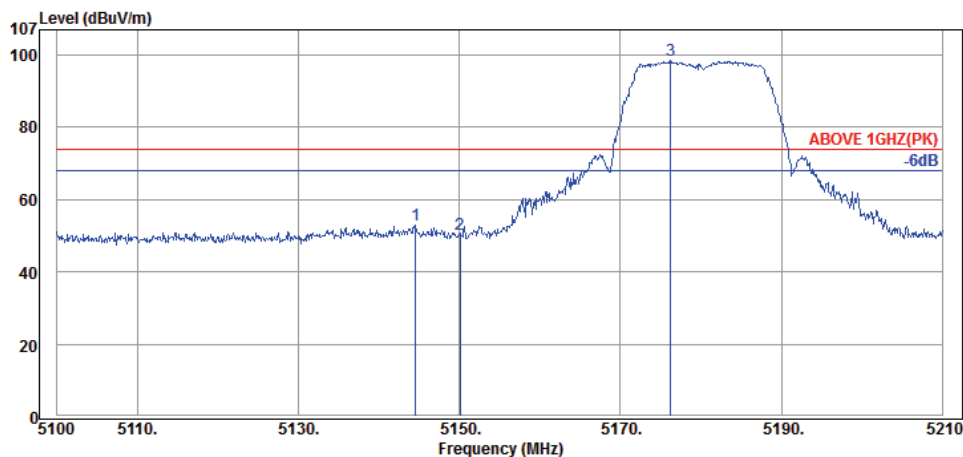

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.55	34.45	9.83	8.58	52.86	74.00	21.14	Peak
5150.05	34.45	9.83	6.20	50.48	74.00	23.52	Peak
5176.23	34.48	9.88	54.09	98.45	---	---	Peak

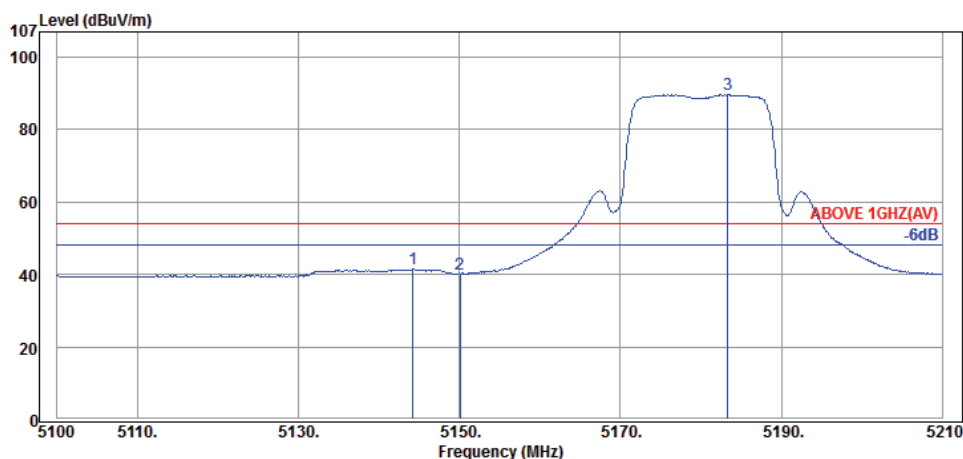


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.22	34.45	9.83	-2.87	41.41	54.00	12.59	Average
5150.05	34.45	9.83	-4.12	40.16	54.00	13.84	Average
5183.38	34.48	9.88	45.31	89.67	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

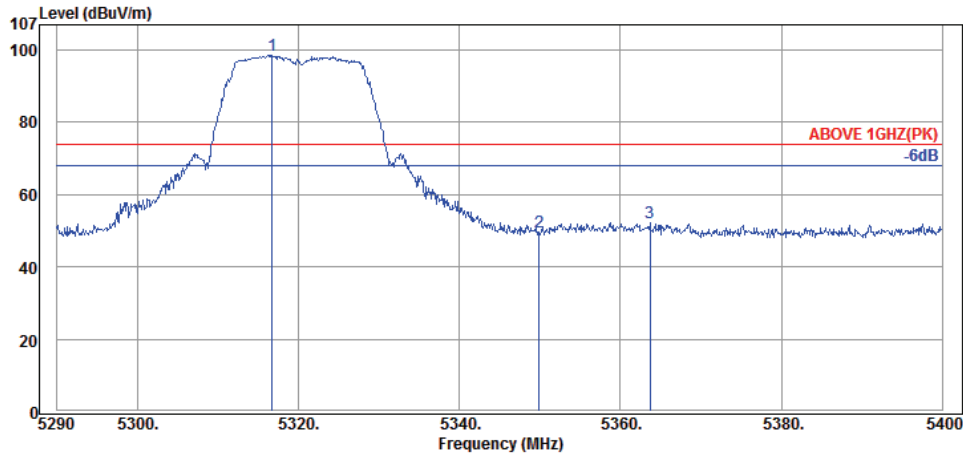

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.73	34.62	10.08	53.77	98.47	---	---	Peak
5349.95	34.65	10.13	4.98	49.76	74.00	24.24	Peak
5363.70	34.67	10.15	7.29	52.11	74.00	21.89	Peak

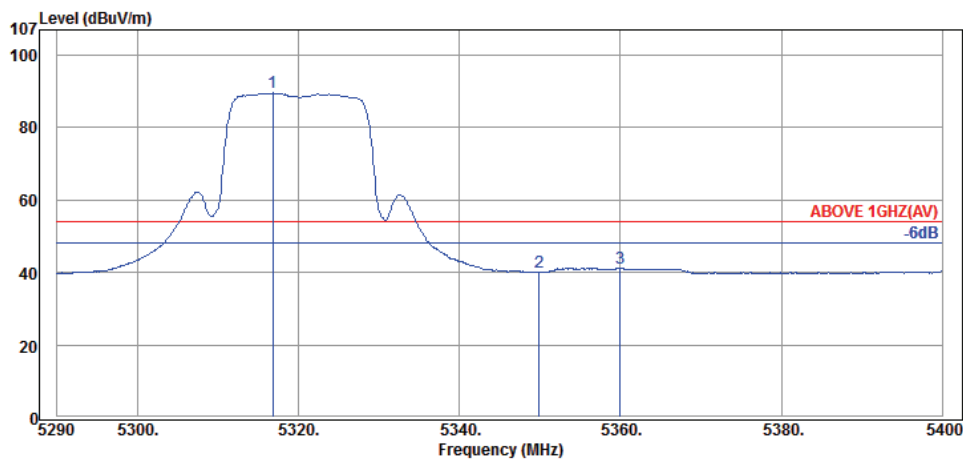


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.84	34.62	10.08	44.84	89.54	---	---	Average
5349.95	34.65	10.13	-4.71	40.07	54.00	13.93	Average
5359.96	34.65	10.13	-3.56	41.22	54.00	12.78	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

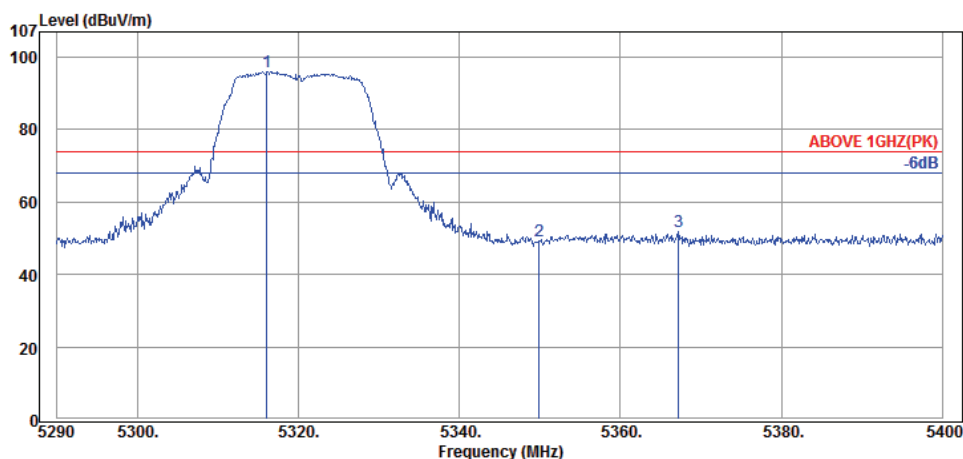

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.07	34.62	10.08	51.23	95.93	---	---	Peak
5349.95	34.65	10.13	4.32	49.10	74.00	24.90	Peak
5367.22	34.67	10.15	7.19	52.01	74.00	21.99	Peak

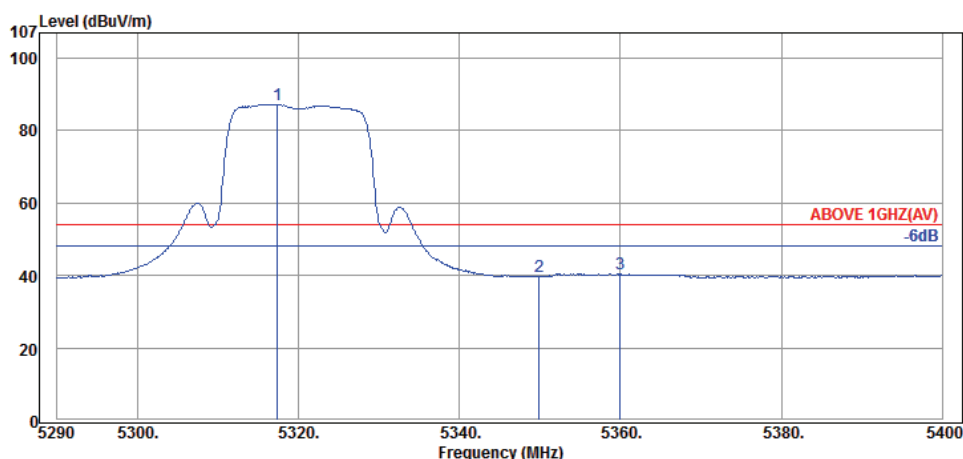


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.39	34.62	10.08	42.55	87.25	---	---	Average
5349.95	34.65	10.13	-5.24	39.54	54.00	14.46	Average
5359.96	34.65	10.13	-4.42	40.36	54.00	13.64	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

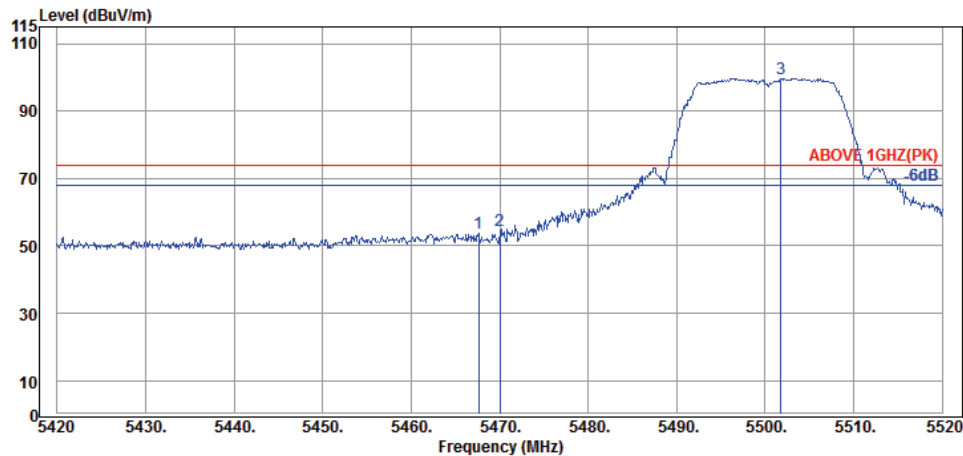

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.60	34.77	10.30	8.77	53.84	74.00	20.16	Peak
5470.00	34.77	10.30	9.58	54.65	74.00	19.35	Peak
5501.80	34.80	10.35	54.59	99.74	---	---	Peak

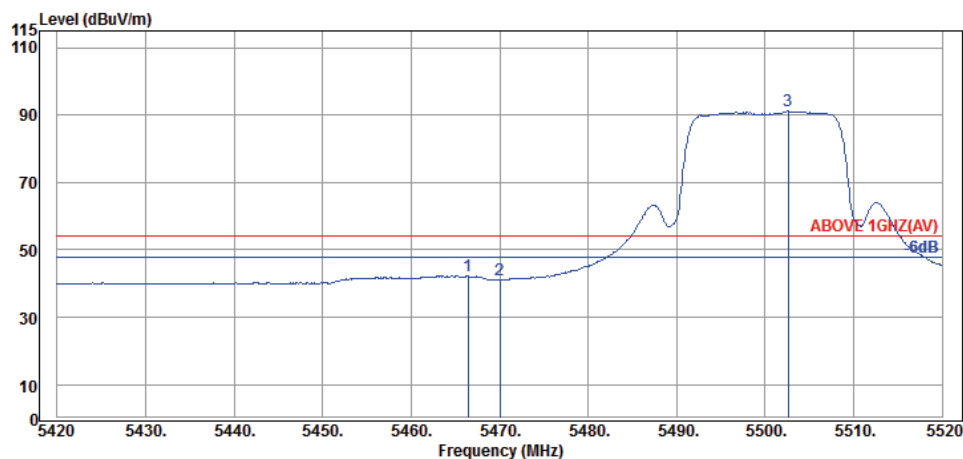


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.40	34.77	10.30	-2.62	42.45	54.00	11.55	Average
5470.00	34.77	10.30	-3.99	41.08	54.00	12.92	Average
5502.60	34.80	10.35	45.99	91.14	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

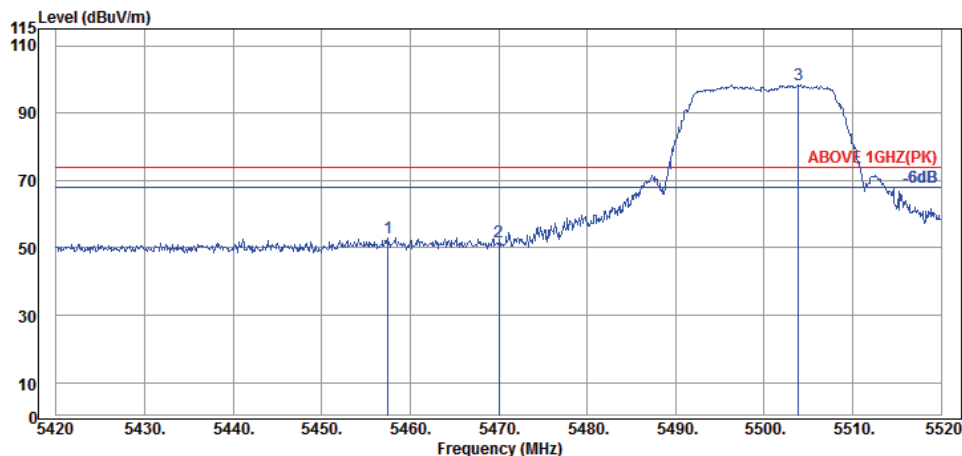

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5457.50	34.75	10.28	7.89	52.92	74.00	21.08	Peak
5470.00	34.77	10.30	6.83	51.90	74.00	22.10	Peak
5503.90	34.80	10.35	53.44	98.59	---	---	Peak

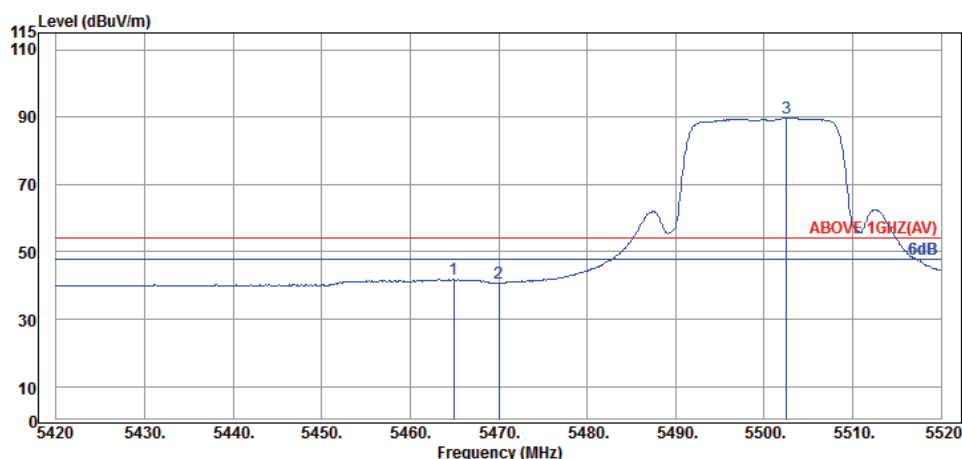


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.90	34.77	10.30	-3.18	41.89	54.00	12.11	Average
5470.00	34.77	10.30	-4.20	40.87	54.00	13.13	Average
5502.50	34.80	10.35	44.52	89.67	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

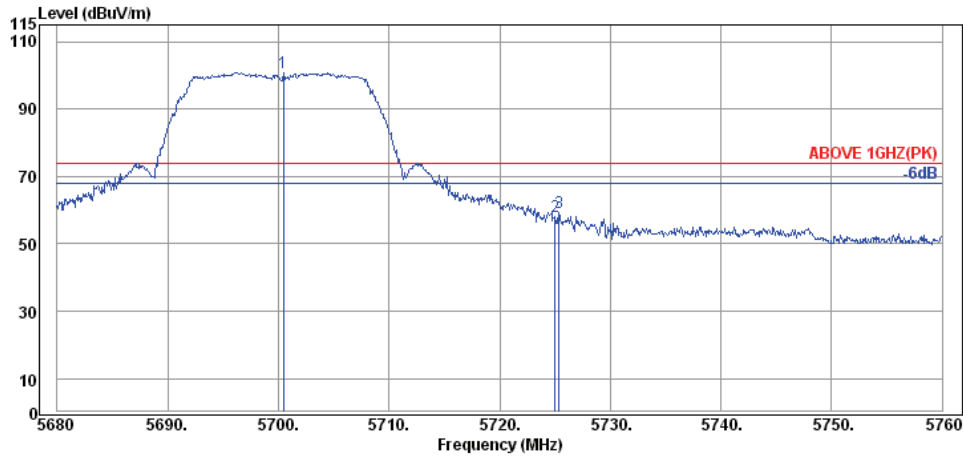

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5700.48	35.03	10.50	55.43	100.96	74.00	---	Peak
5725.04	35.07	10.52	12.40	57.99	74.00	16.01	Peak
5725.36	35.07	10.52	13.69	59.28	74.00	14.72	Peak

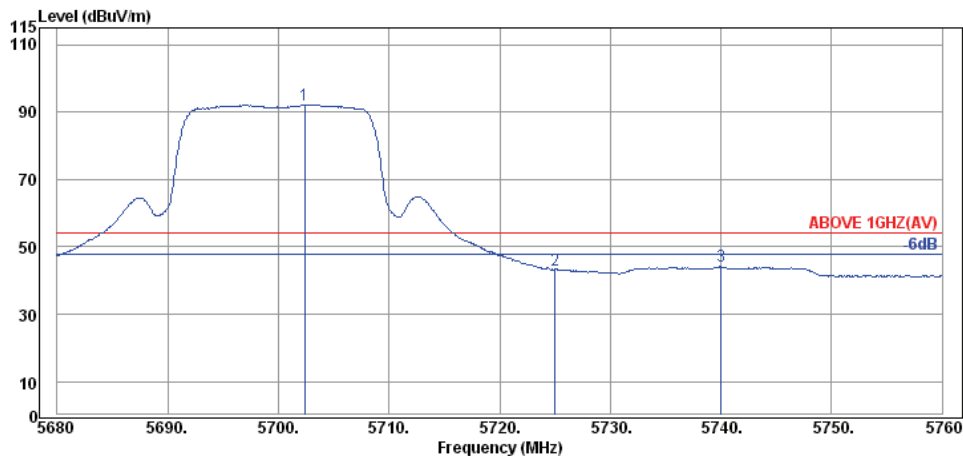


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.40	35.05	10.51	46.51	92.07	54.00	---	Average
5725.04	35.07	10.52	-2.32	43.27	54.00	10.73	Average
5740.00	35.09	10.54	-1.48	44.15	54.00	9.85	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

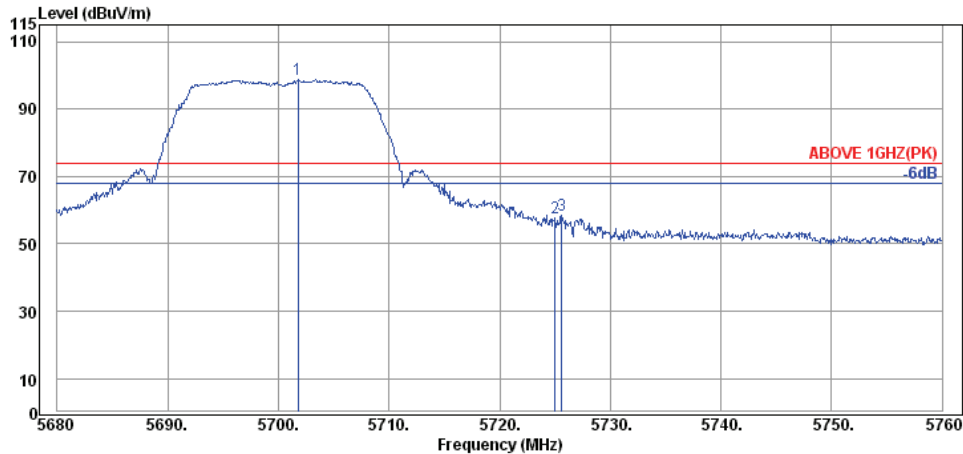

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5701.76	35.05	10.51	53.22	98.78	74.00	---	Peak
5725.04	35.07	10.52	12.12	57.71	74.00	16.29	Peak
5725.60	35.07	10.52	12.74	58.33	74.00	15.67	Peak

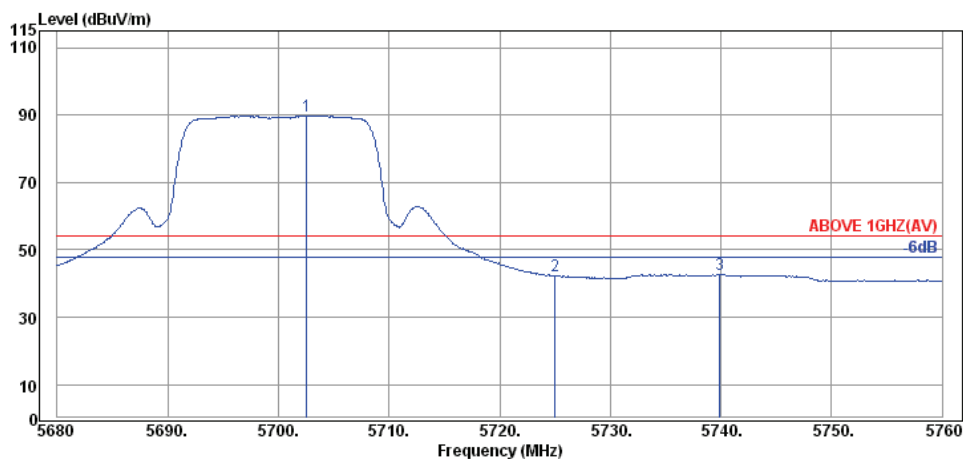


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.56	35.05	10.51	44.32	89.88	54.00	---	Average
5725.04	35.07	10.52	-3.12	42.47	54.00	11.53	Average
5739.92	35.09	10.54	-2.87	42.76	54.00	11.24	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

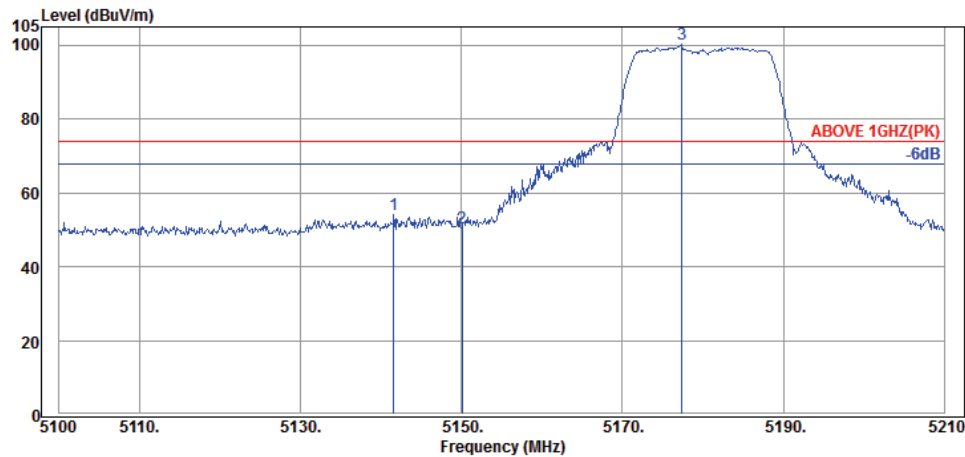

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.58	34.45	9.83	9.69	53.97	74.00	20.03	Peak
5150.05	34.45	9.83	6.17	50.45	74.00	23.55	Peak
5177.44	34.48	9.88	55.83	100.19	---	---	Peak

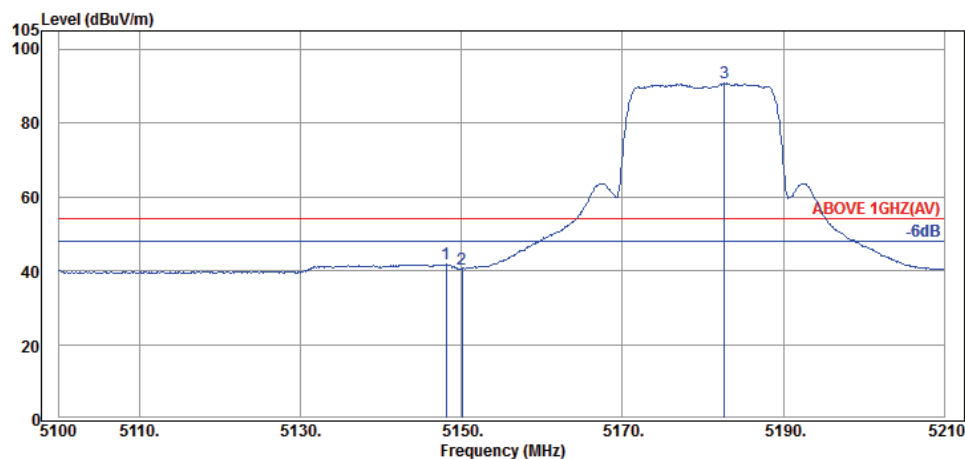

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.07	34.45	9.83	-2.59	41.69	54.00	12.31	Average
5150.05	34.45	9.83	-3.76	40.52	54.00	13.48	Average
5182.72	34.48	9.88	46.48	90.84	---	---	Average

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

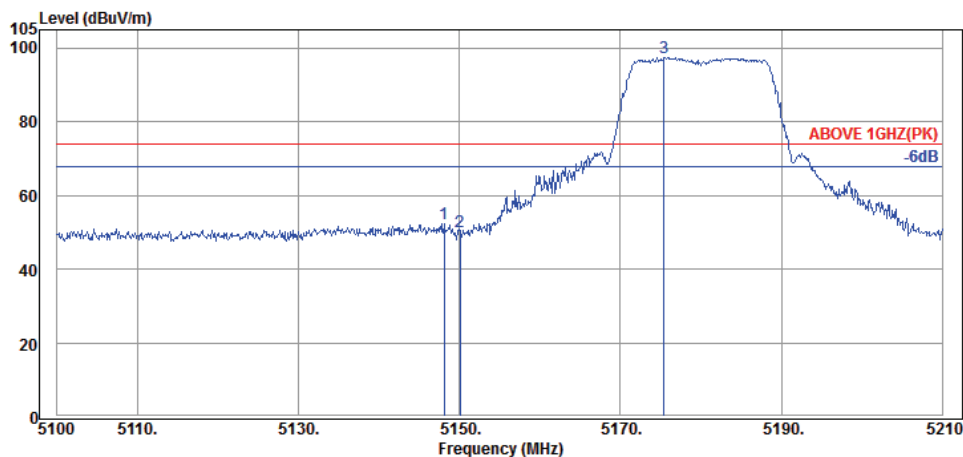

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.07	34.45	9.83	8.13	52.41	74.00	21.59	Peak
5150.05	34.45	9.83	6.04	50.32	74.00	23.68	Peak
5175.46	34.48	9.88	53.18	97.54	---	---	Peak

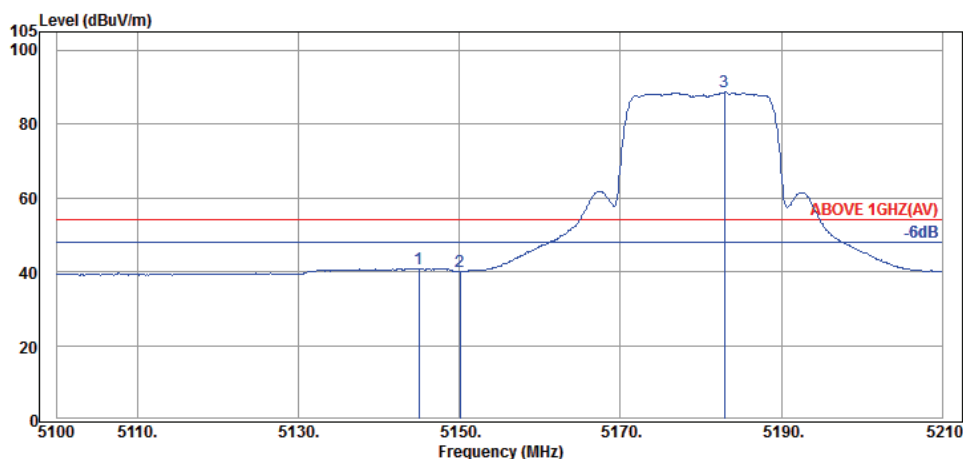


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.99	34.45	9.83	-3.35	40.93	54.00	13.07	Average
5150.05	34.45	9.83	-4.26	40.02	54.00	13.98	Average
5182.94	34.48	9.88	44.40	88.76	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

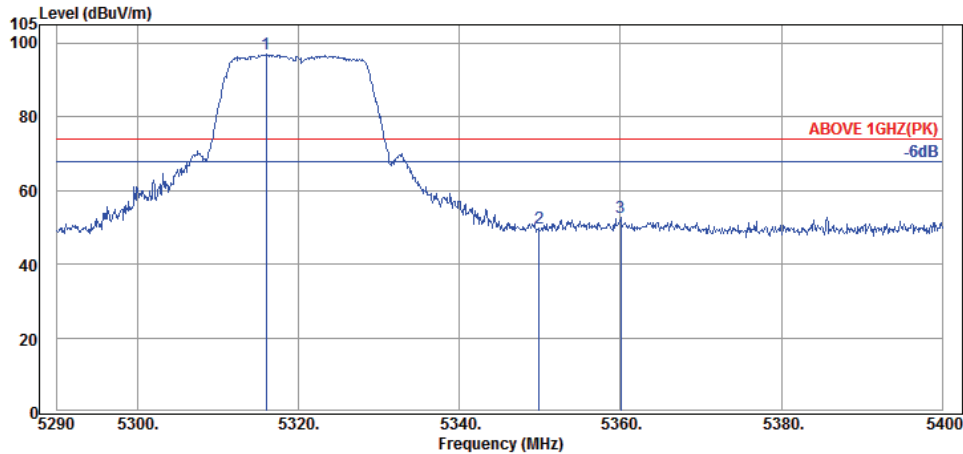

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.96	34.62	10.08	52.46	97.16	---	---	Peak
5349.95	34.65	10.13	5.14	49.92	74.00	24.08	Peak
5360.07	34.65	10.13	7.87	52.65	74.00	21.35	Peak

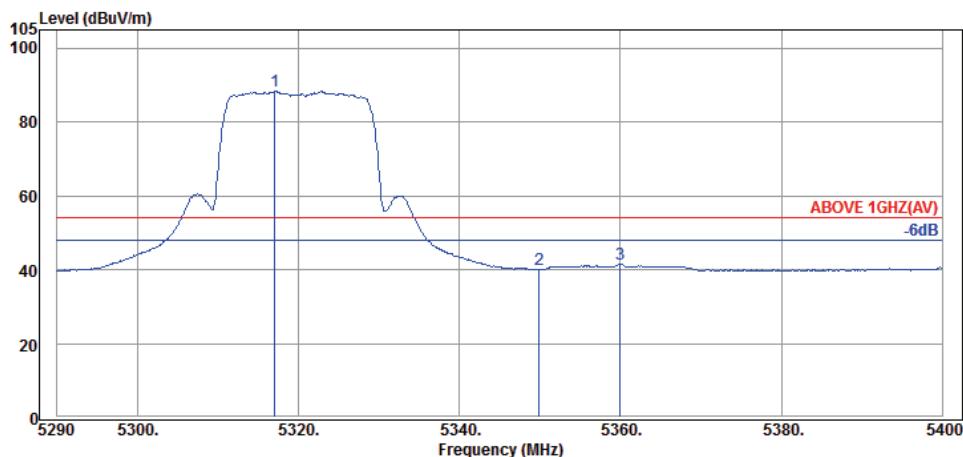


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.06	34.62	10.08	43.68	88.38	---	---	Average
5349.95	34.65	10.13	-4.71	40.07	54.00	13.93	Average
5359.96	34.65	10.13	-3.22	41.56	54.00	12.44	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

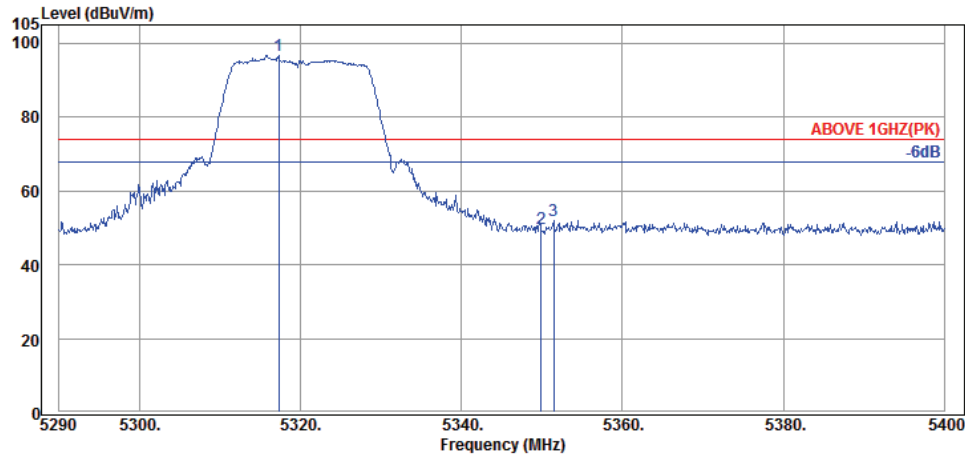

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.28	34.62	10.08	52.17	96.87	---	---	Peak
5349.95	34.65	10.13	5.16	49.94	74.00	24.06	Peak
5351.49	34.65	10.13	7.27	52.05	74.00	21.95	Peak

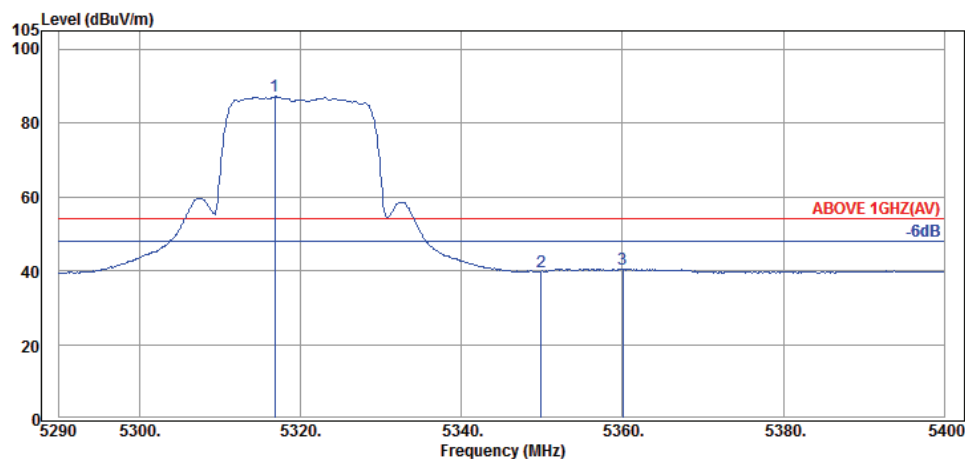


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.84	34.62	10.08	42.52	87.22	---	---	Average
5349.95	34.65	10.13	-5.08	39.70	54.00	14.30	Average
5360.07	34.65	10.13	-4.20	40.58	54.00	13.42	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

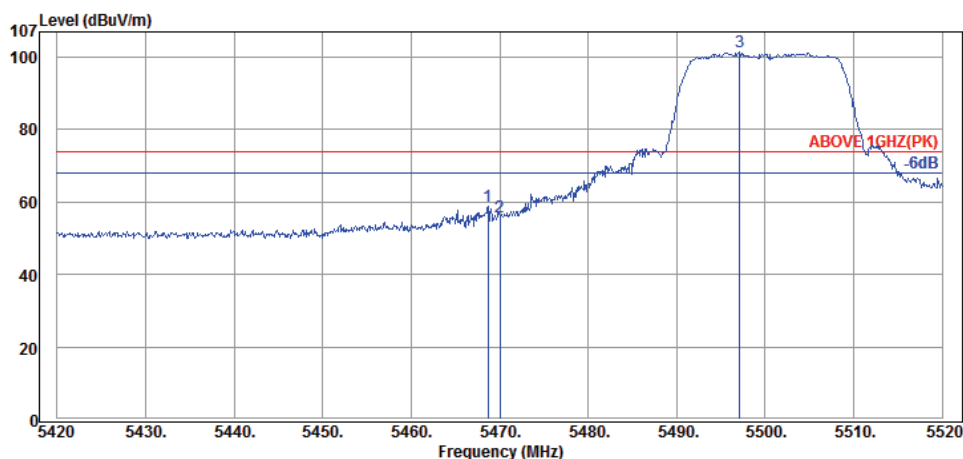

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.70	34.77	10.30	13.91	58.98	74.00	15.02	Peak
5470.00	34.77	10.30	10.99	56.06	74.00	17.94	Peak
5497.10	34.80	10.35	56.48	101.63	---	---	Peak

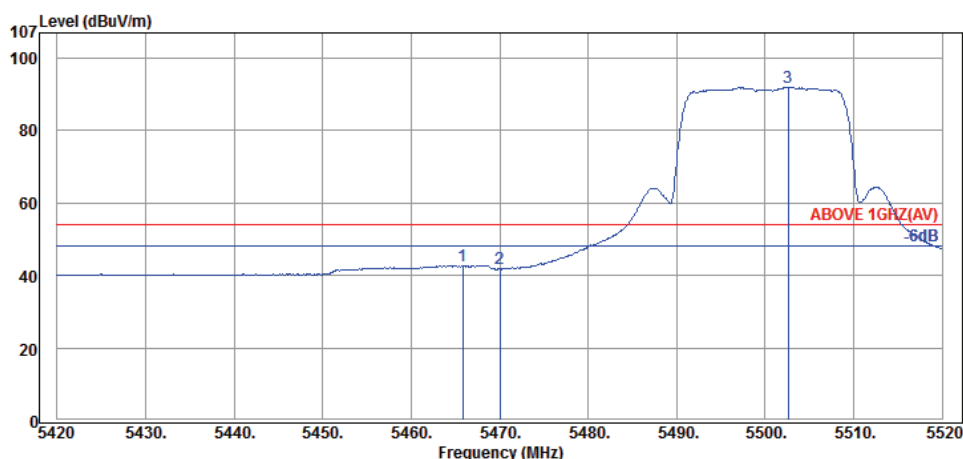

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.80	34.77	10.30	-2.25	42.82	54.00	11.18	Average
5470.00	34.77	10.30	-3.24	41.83	54.00	12.17	Average
5502.60	34.80	10.35	46.91	92.06	---	---	Average

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

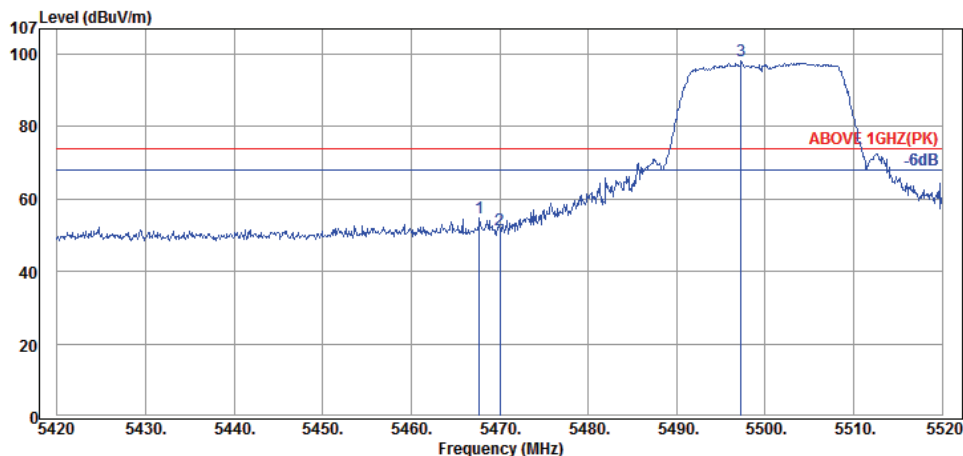

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.70	34.77	10.30	9.67	54.74	74.00	19.26	Peak
5470.00	34.77	10.30	6.30	51.37	74.00	22.63	Peak
5497.30	34.80	10.35	52.94	98.09	---	---	Peak

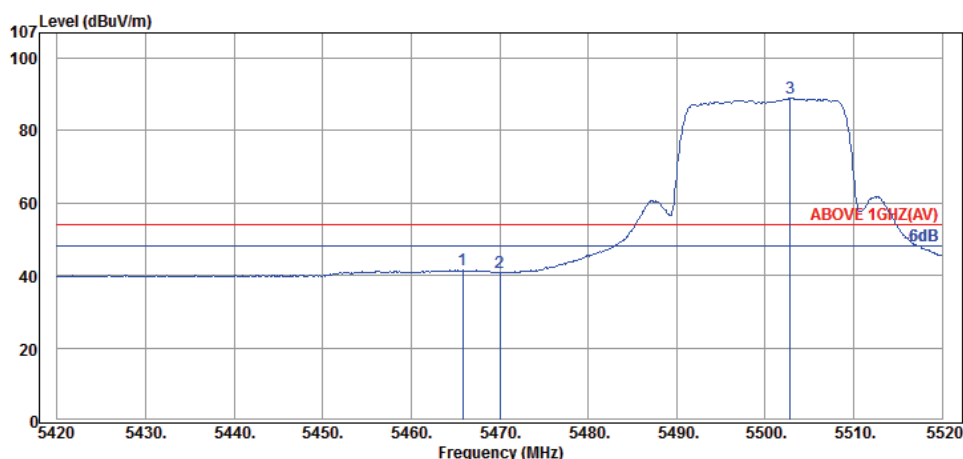


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.80	34.77	10.30	-3.54	41.53	54.00	12.47	Average
5470.00	34.77	10.30	-4.38	40.69	54.00	13.31	Average
5502.80	34.80	10.35	43.81	88.96	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

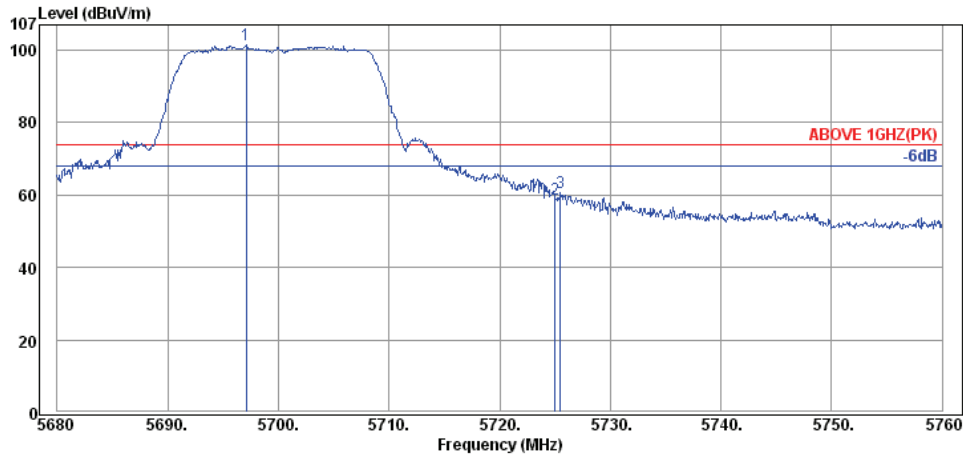

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5697.12	35.03	10.50	55.89	101.42	74.00	---	Peak
5725.04	35.07	10.52	13.28	58.87	74.00	15.13	Peak
5725.52	35.07	10.52	15.00	60.59	74.00	13.41	Peak

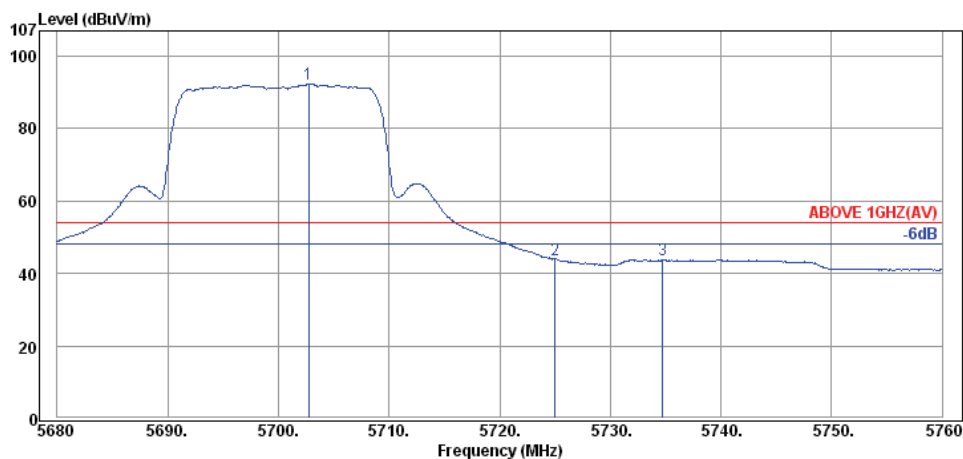


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.72	35.05	10.51	46.63	92.19	54.00	---	Average
5725.04	35.07	10.52	-1.74	43.85	54.00	10.15	Average
5734.72	35.09	10.54	-1.83	43.80	54.00	10.20	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

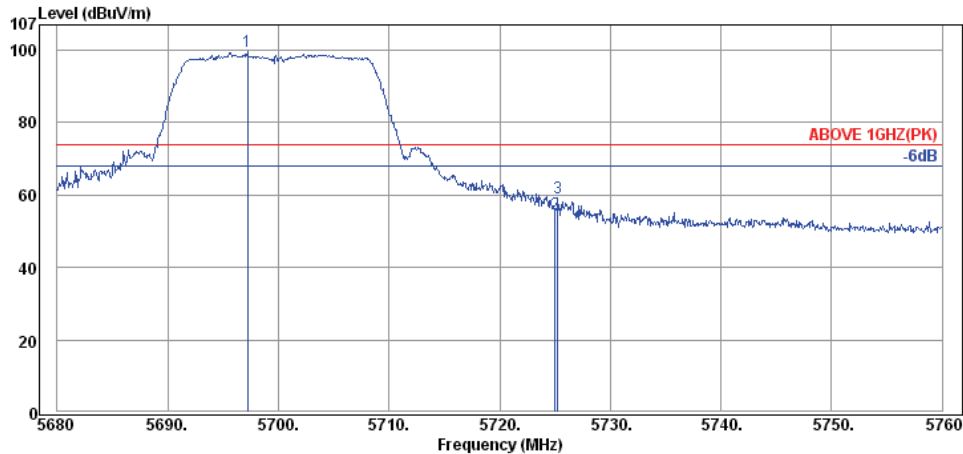

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5697.20	35.03	10.50	54.07	99.60	74.00	---	Peak
5725.04	35.07	10.52	9.34	54.93	74.00	19.07	Peak
5725.28	35.07	10.52	13.59	59.18	74.00	14.82	Peak

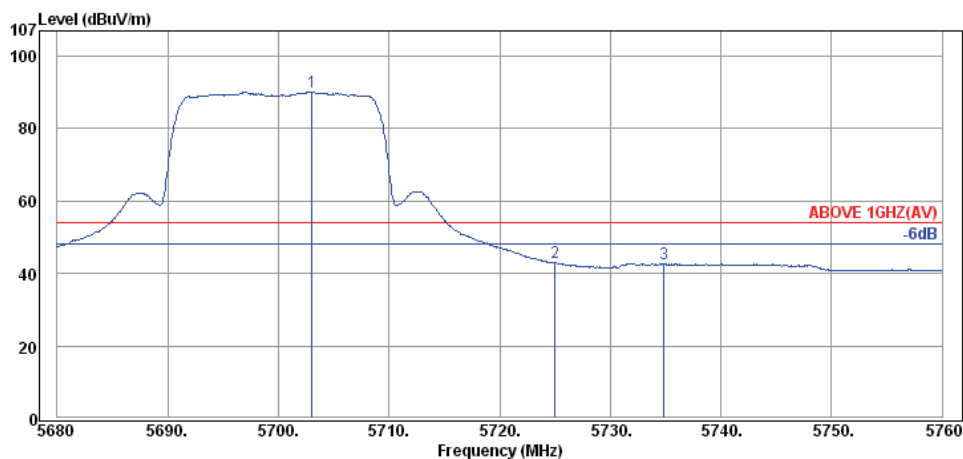


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5703.04	35.05	10.51	44.66	90.22	54.00	---	Average
5725.04	35.07	10.52	-2.62	42.97	54.00	11.03	Average
5734.88	35.09	10.54	-2.95	42.68	54.00	11.32	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

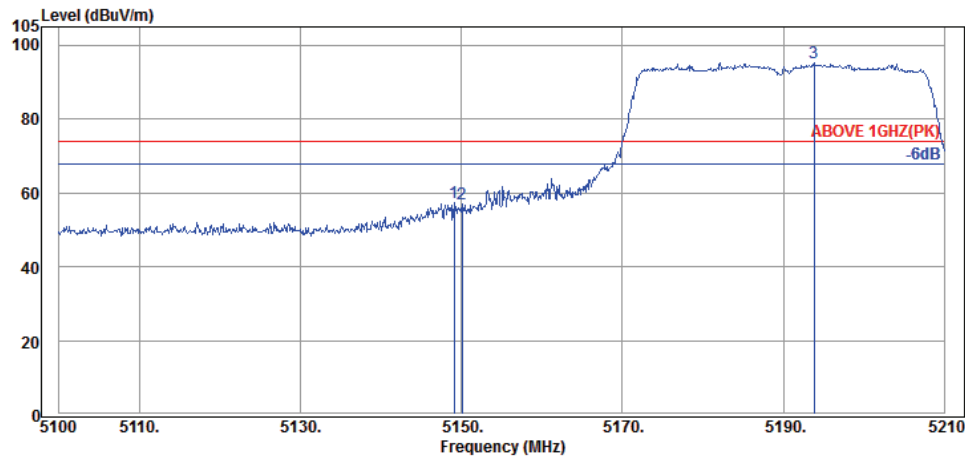

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.06	34.45	9.83	13.05	57.33	74.00	16.67	Peak
5150.05	34.45	9.83	12.55	56.83	74.00	17.17	Peak
5193.83	34.50	9.91	50.92	95.33	---	---	Peak

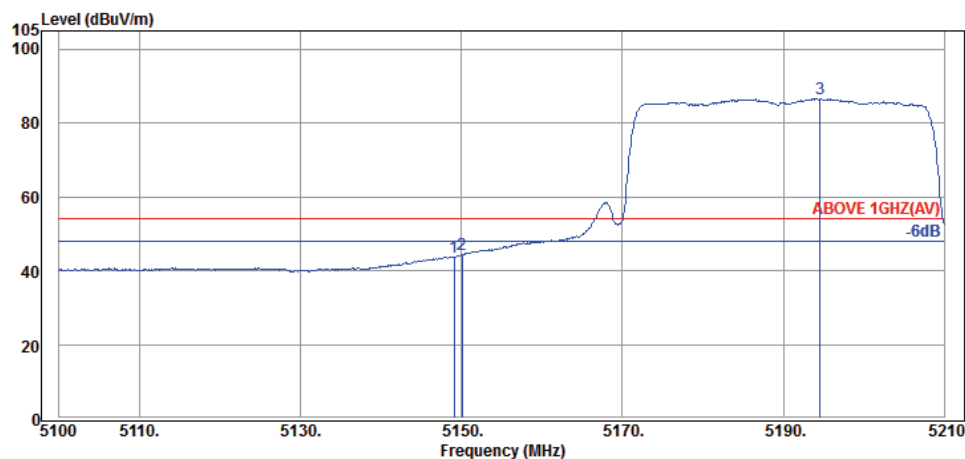


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.06	34.45	9.83	-0.58	43.70	54.00	10.30	Average
5150.05	34.45	9.83	-0.04	44.24	54.00	9.76	Average
5194.60	34.50	9.91	42.15	86.56	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

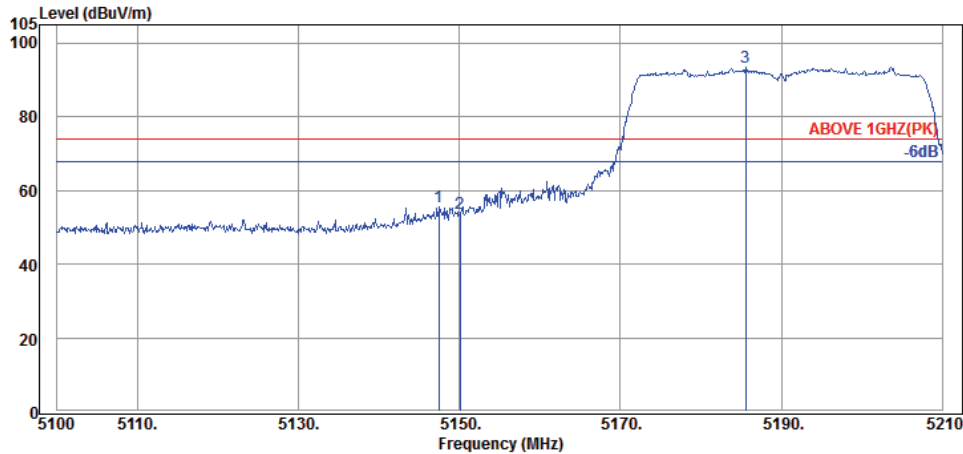

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.41	34.45	9.83	11.38	55.66	74.00	18.34	Peak
5150.05	34.45	9.83	9.62	53.90	74.00	20.10	Peak
5185.58	34.48	9.88	49.13	93.49	---	---	Peak

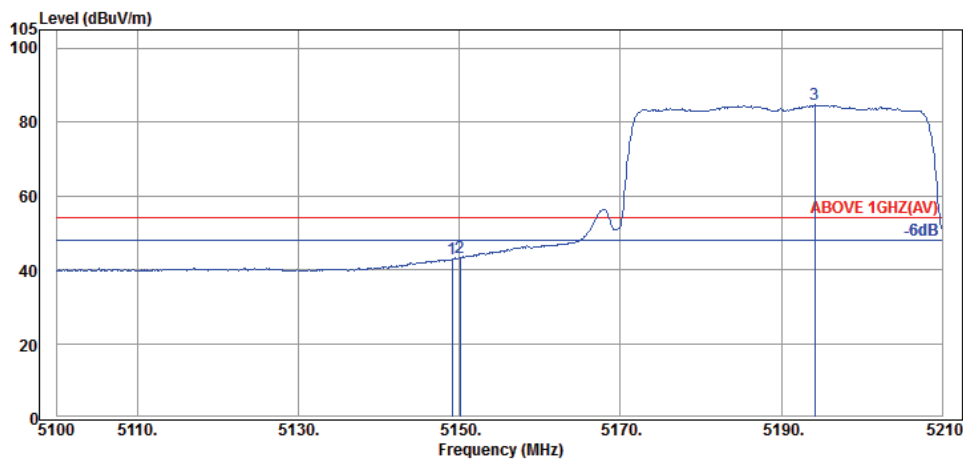

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.06	34.45	9.83	-1.43	42.85	54.00	11.15	Average
5150.05	34.45	9.83	-0.85	43.43	54.00	10.57	Average
5194.16	34.50	9.91	40.20	84.61	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

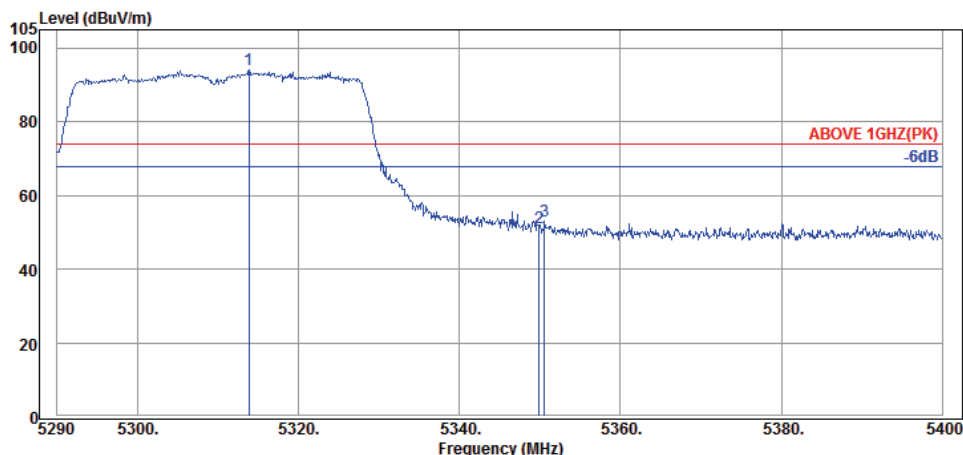

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5313.87	34.62	10.08	49.32	94.02	---	---	Peak
5349.95	34.65	10.13	6.48	51.26	74.00	22.74	Peak
5350.61	34.65	10.13	8.09	52.87	74.00	21.13	Peak

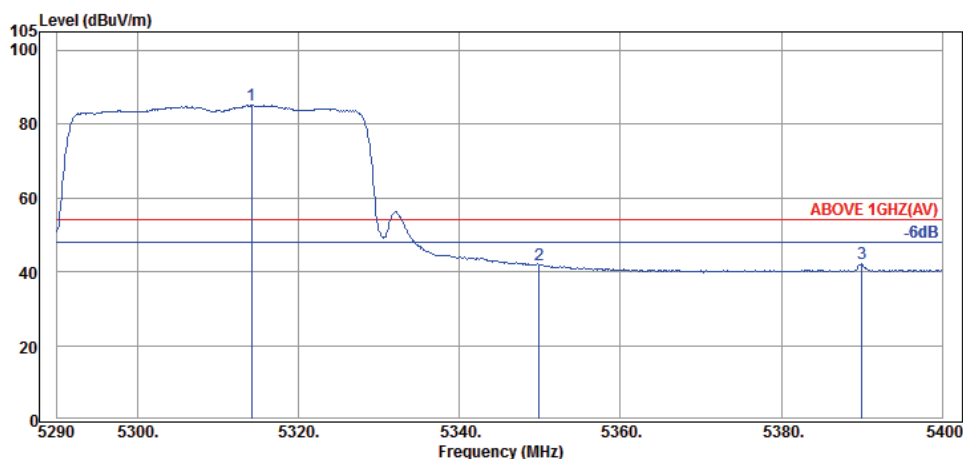


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5314.20	34.62	10.08	40.53	85.23	---	---	Average
5349.95	34.65	10.13	-2.83	41.95	54.00	12.05	Average
5389.99	34.68	10.18	-2.80	42.06	54.00	11.94	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

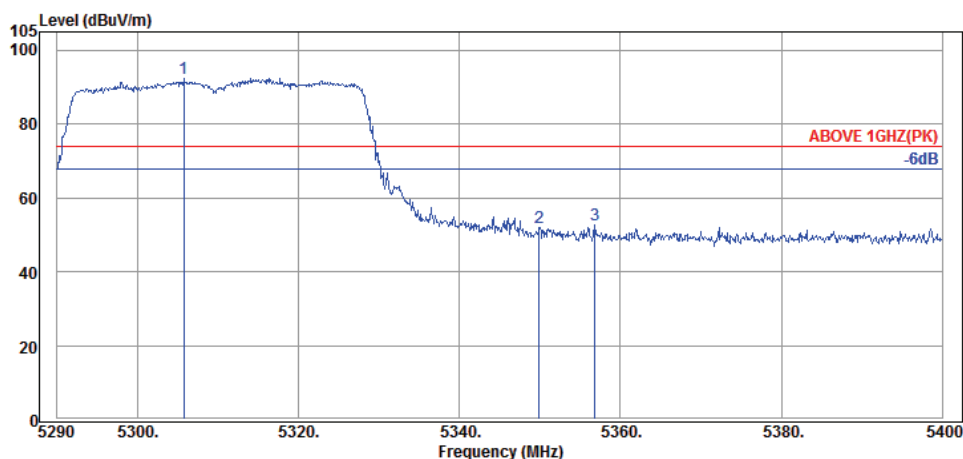

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5305.73	34.60	10.05	47.67	92.32	---	---	Peak
5349.95	34.65	10.13	7.02	51.80	74.00	22.20	Peak
5356.88	34.65	10.13	7.89	52.67	74.00	21.33	Peak

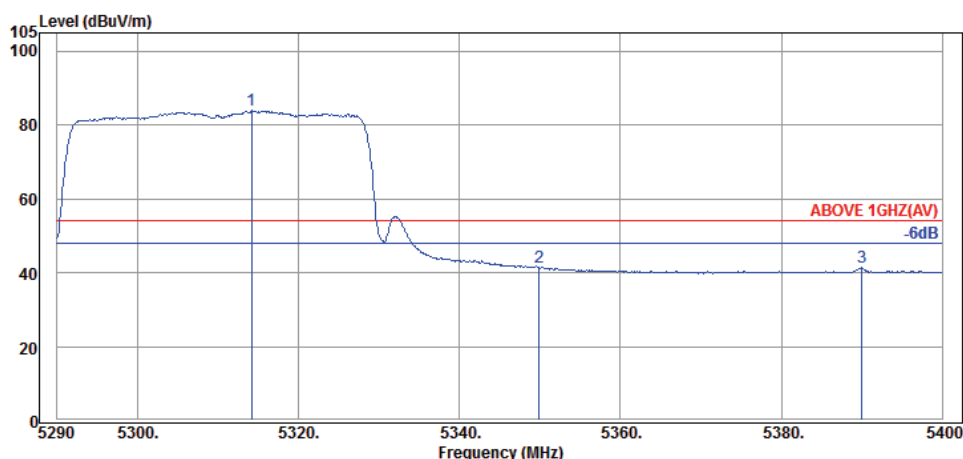


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5314.20	34.62	10.08	39.21	83.91	---	---	Average
5349.95	34.65	10.13	-3.32	41.46	54.00	12.54	Average
5389.99	34.68	10.18	-3.54	41.32	54.00	12.68	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

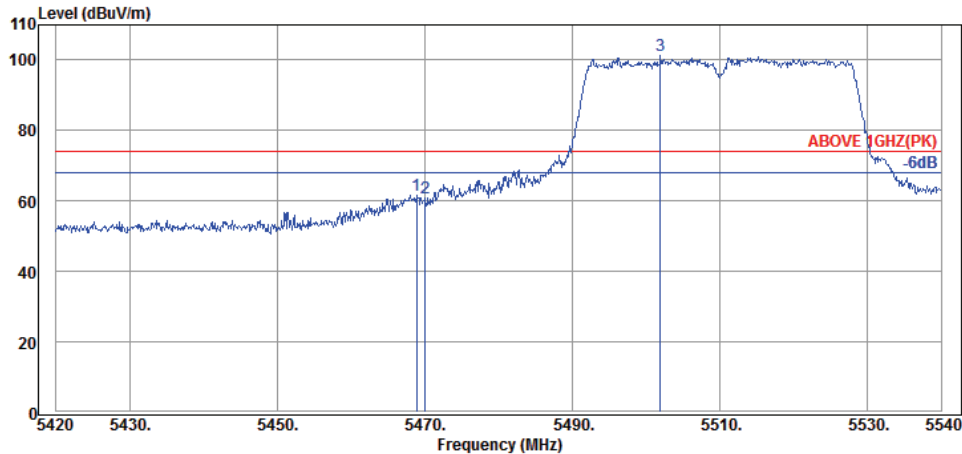

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.84	34.77	11.92	15.10	61.79	74.00	12.21	Peak
5470.04	34.77	11.98	14.01	60.76	74.00	13.24	Peak
5501.96	34.80	12.03	54.29	101.12	---	---	Peak

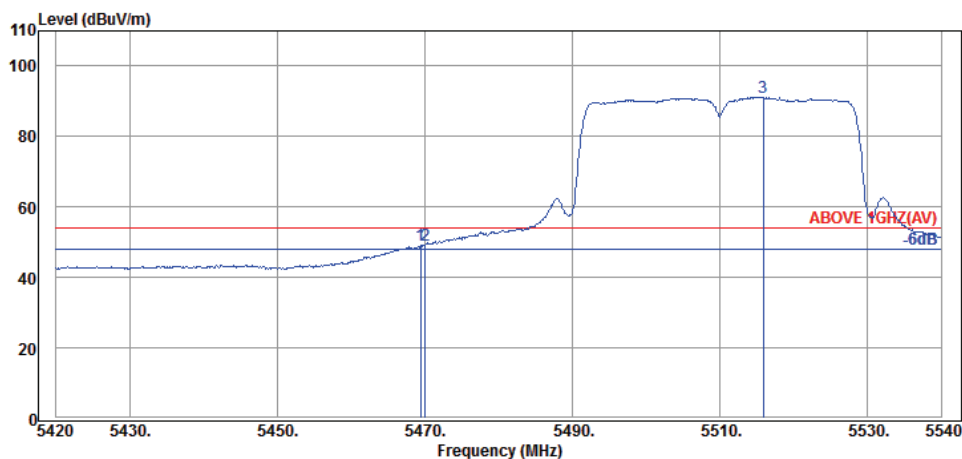


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.44	34.77	11.98	2.37	49.12	54.00	4.88	Average
5470.04	34.77	11.98	2.58	49.33	54.00	4.67	Average
5515.88	34.82	12.10	44.26	91.18	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

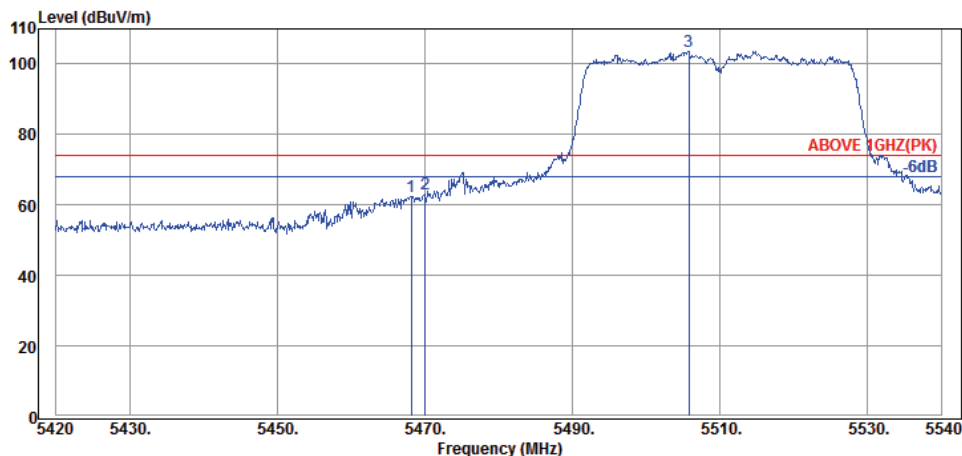

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.12	34.77	11.92	15.86	62.55	74.00	11.45	Peak
5470.04	34.77	11.98	16.38	63.13	74.00	10.87	Peak
5505.80	34.80	12.10	56.62	103.52	---	---	Peak

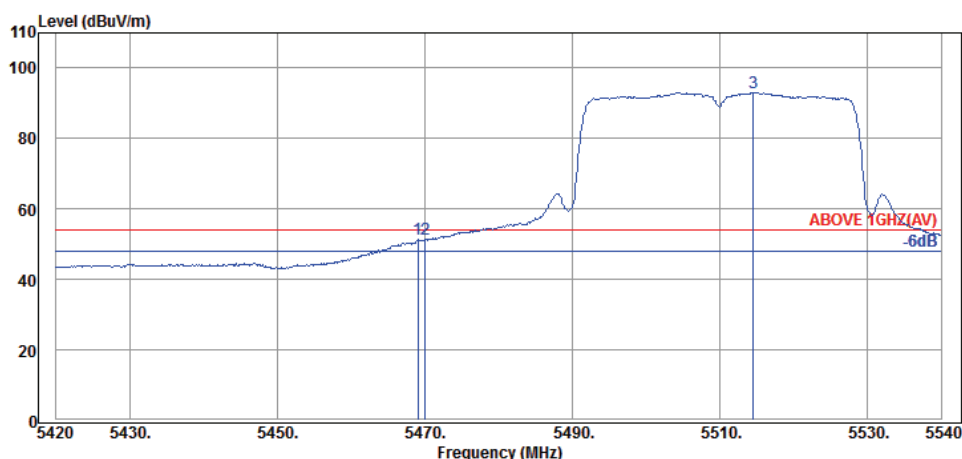


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.08	34.77	11.98	4.56	51.31	54.00	2.69	Average
5470.04	34.77	11.98	4.55	51.30	54.00	2.70	Average
5514.56	34.82	12.10	46.09	93.01	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

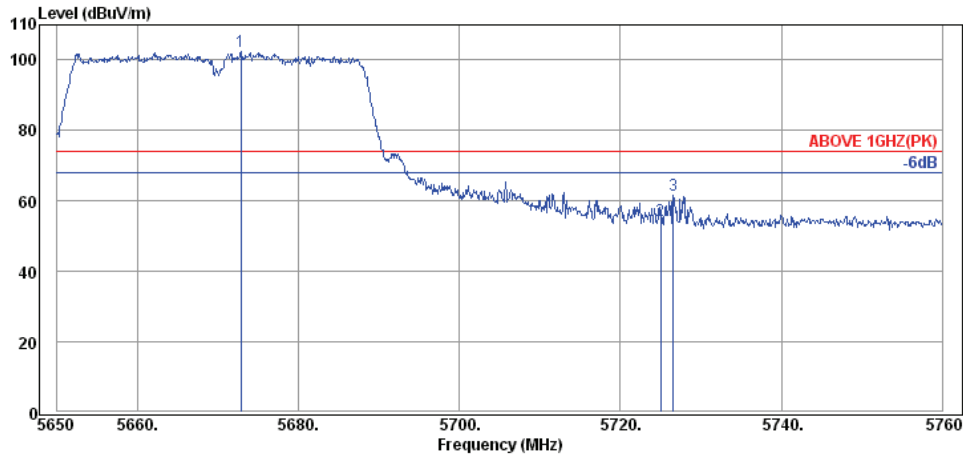

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5672.88	35.01	12.69	54.72	102.42	74.00	---	Peak
5725.02	35.07	12.83	6.71	54.61	74.00	19.39	Peak
5726.56	35.07	12.83	13.61	61.51	74.00	12.49	Peak

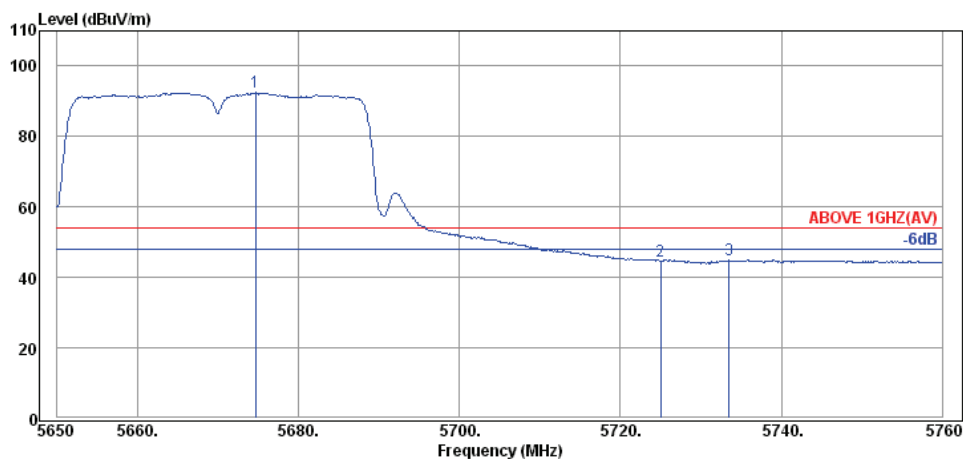


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5674.64	35.01	12.69	44.76	92.46	54.00	---	Average
5725.02	35.07	12.83	-3.24	44.66	54.00	9.34	Average
5733.49	35.07	12.83	-2.96	44.94	54.00	9.06	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

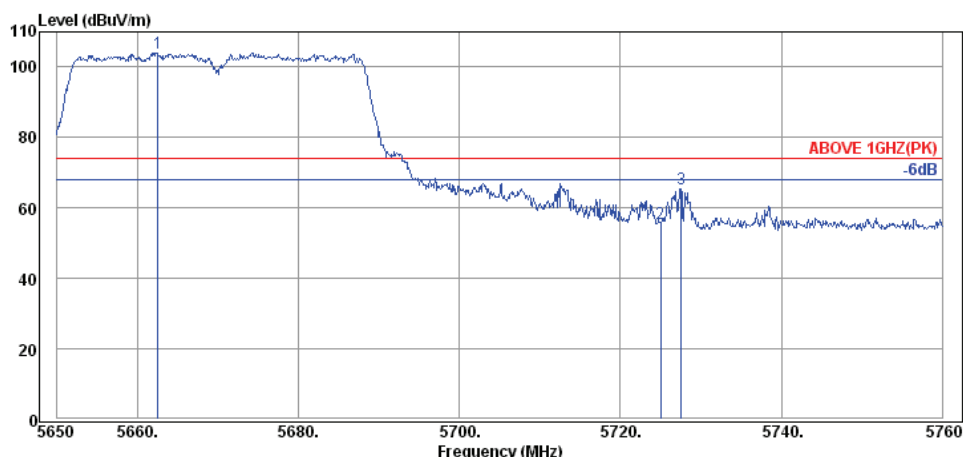

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5662.54	34.99	12.64	56.49	104.12	74.00	---	Peak
5725.02	35.07	12.83	7.57	55.47	74.00	18.53	Peak
5727.55	35.07	12.83	17.64	65.54	74.00	8.46	Peak

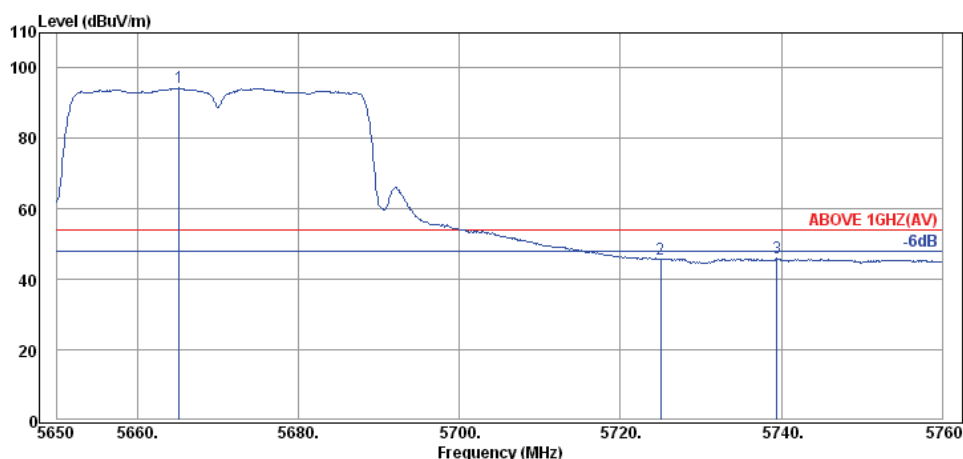

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5665.18	34.99	12.64	46.78	94.41	54.00	---	Average
5725.02	35.07	12.83	-2.13	45.77	54.00	8.23	Average
5739.43	35.09	12.83	-1.98	45.94	54.00	8.06	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.2 Emissions outside the frequency band:

The emissions (up to 40GHz) not reported for there is no emission be found.

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v01r04 that emission levels below the 15.209 general radiated emissions limits is not required.