

## RF MEASUREMENT REPORT

---

**FCC ID:** U4GDL36LT  
**Application:** Datalogic S.r.l.  
**Product:** Barcode Reader  
**Model No.:** DL36LT  
**Brand Name:** DATALOGIC  
**FCC Rule Part(s):** Part 2, 22 (H), 24 (E), 27  
**Result:** Complies  
**Test Date:** 2022-09-10 ~ 2022-09-27

**Reviewed By:**



Jame Yuan

**Approved By:**



Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the

The test report shall not be reproduced except in full without the written approval of MRT

---

**Revision History**

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 2209RSU001-U8 | Rev. 01 | Initial Report | 2023-02-02 | Valid |
|               |         |                |            |       |

## CONTENTS

| Description                                                    | Page      |
|----------------------------------------------------------------|-----------|
| <b>1. General Information .....</b>                            | <b>5</b>  |
| 1.1. Applicant .....                                           | 5         |
| 1.2. Manufacturer .....                                        | 5         |
| 1.3. Testing Facility .....                                    | 5         |
| 1.4. Product Information .....                                 | 6         |
| 1.5. Radio Specification Under Test .....                      | 7         |
| 1.6. Description of Available Antennas .....                   | 7         |
| 1.7. Test Methodology .....                                    | 8         |
| 1.8. Device Capabilities .....                                 | 8         |
| <b>2. Test Configuration .....</b>                             | <b>9</b>  |
| 2.1. Test System Connection Diagram .....                      | 9         |
| 2.2. Test Environment Condition .....                          | 9         |
| <b>3. Measuring Instrument .....</b>                           | <b>10</b> |
| <b>4. Decision Rules and Measurement Uncertainty .....</b>     | <b>12</b> |
| 4.1. Decision Rules .....                                      | 12        |
| 4.2. Measurement Uncertainty .....                             | 12        |
| <b>5. Test Result .....</b>                                    | <b>13</b> |
| 5.1. Summary .....                                             | 13        |
| 5.2. Occupied Bandwidth Measurement .....                      | 14        |
| 5.2.1. Test Limit .....                                        | 14        |
| 5.2.2. Test Procedure .....                                    | 14        |
| 5.2.3. Test Setting .....                                      | 14        |
| 5.2.4. Test Setup .....                                        | 14        |
| 5.2.5. Test Result .....                                       | 14        |
| 5.3. Frequency Stability Measurement .....                     | 15        |
| 5.3.1. Test Limit .....                                        | 15        |
| 5.3.2. Test Procedure .....                                    | 15        |
| 5.3.3. Test Setting .....                                      | 15        |
| 5.3.4. Test Setup .....                                        | 16        |
| 5.3.5. Test Result .....                                       | 16        |
| 5.4. Equivalent Isotropically Radiated Power Measurement ..... | 17        |
| 5.4.1. Test Limit .....                                        | 17        |
| 5.4.2. Test Procedure .....                                    | 17        |
| 5.4.3. Test Setting .....                                      | 18        |

|                                                 |                                                         |            |
|-------------------------------------------------|---------------------------------------------------------|------------|
| 5.4.4.                                          | Test Setup .....                                        | 18         |
| 5.4.5.                                          | Test Result .....                                       | 18         |
| 5.5.                                            | Band Edge Measurement .....                             | 19         |
| 5.5.1.                                          | Test Limit .....                                        | 19         |
| 5.5.2.                                          | Test Procedure .....                                    | 20         |
| 5.5.3.                                          | Test Setting .....                                      | 20         |
| 5.5.4.                                          | Test Setup .....                                        | 20         |
| 5.5.5.                                          | Test Result .....                                       | 20         |
| 5.6.                                            | Peak to Average Ratio Measurement .....                 | 21         |
| 5.6.1.                                          | Test Limit .....                                        | 21         |
| 5.6.2.                                          | Test Procedure .....                                    | 21         |
| 5.6.3.                                          | Test Setting .....                                      | 21         |
| 5.6.4.                                          | Test Setup .....                                        | 21         |
| 5.6.5.                                          | Test Result .....                                       | 21         |
| 5.7.                                            | Conducted Spurious Emissions Measurement.....           | 22         |
| 5.7.1.                                          | Test Limit .....                                        | 22         |
| 5.7.2.                                          | Test Procedure .....                                    | 22         |
| 5.7.3.                                          | Test Setting .....                                      | 22         |
| 5.7.4.                                          | Test Setup .....                                        | 23         |
| 5.7.5.                                          | Test Result .....                                       | 23         |
| 5.8.                                            | Radiated Spurious Emissions Measurement.....            | 24         |
| 5.8.1.                                          | Test Limit .....                                        | 24         |
| 5.8.2.                                          | Test Procedure .....                                    | 24         |
| 5.8.3.                                          | Test Setting .....                                      | 24         |
| 5.8.4.                                          | Test Setup .....                                        | 25         |
| 5.8.5.                                          | Test Result .....                                       | 26         |
| <b>Appendix A - Test Result .....</b>           |                                                         | <b>27</b>  |
| A.1                                             | Occupied Bandwidth Test Result .....                    | 27         |
| A.2                                             | Frequency Stability Test Result.....                    | 51         |
| A.3                                             | Equivalent Isotropically Radited Power Test Result..... | 58         |
| A.4                                             | Band Edge Test Result .....                             | 103        |
| A.5                                             | Peak to Average Radio Test Result .....                 | 138        |
| A.6                                             | Conducted Spurious Emissions Test Result .....          | 145        |
| A.7                                             | Radiated Spurious Emissions Test Result .....           | 167        |
| <b>Appendix B - Test Setup Photograph .....</b> |                                                         | <b>174</b> |
| <b>Appendix C - EUT Photograph .....</b>        |                                                         | <b>175</b> |

### 1.1. Applicant

Via San Vitalino no.13, Calderara di Reno - 40012(BO) - Italy

Via San Vitalino no.13, Calderara di Reno - 40012(BO) - Italy

|                                     |                                                                                                 |                                  |                                  |                                  |  |
|-------------------------------------|-------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------|----------------------------------|--|
| <input checked="" type="checkbox"/> | <b>Test Site – MRT Suzhou Laboratory</b>                                                        |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Suzhou - Wuzhong)</b>                                                   |                                  |                                  |                                  |  |
|                                     | D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China              |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Suzhou - SIP)</b>                                                       |                                  |                                  |                                  |  |
|                                     | 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China    |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Accreditations</b>                                                                |                                  |                                  |                                  |  |
| A2LA: 3628.01                       |                                                                                                 | CNAS: L10551                     |                                  |                                  |  |
| FCC: CN1166                         |                                                                                                 | ISED: CN0001                     |                                  |                                  |  |
| VCCI:                               | <input type="checkbox"/> R-20025                                                                | <input type="checkbox"/> G-20034 | <input type="checkbox"/> C-20020 | <input type="checkbox"/> T-20020 |  |
|                                     | <input type="checkbox"/> R-20141                                                                | <input type="checkbox"/> G-20134 | <input type="checkbox"/> C-20103 | <input type="checkbox"/> T-20104 |  |
| <input type="checkbox"/>            | <b>Test Site – MRT Shenzhen Laboratory</b>                                                      |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Shenzhen)</b>                                                           |                                  |                                  |                                  |  |
|                                     | 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Accreditations</b>                                                                |                                  |                                  |                                  |  |
|                                     | A2LA: 3628.02                                                                                   |                                  | CNAS: L10551                     |                                  |  |
|                                     | FCC: CN1284                                                                                     |                                  | ISED: CN0105                     |                                  |  |
| <input type="checkbox"/>            | <b>Test Site – MRT Taiwan Laboratory</b>                                                        |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Location (Taiwan)</b>                                                             |                                  |                                  |                                  |  |
|                                     | No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)                        |                                  |                                  |                                  |  |
|                                     | <b>Laboratory Accreditations</b>                                                                |                                  |                                  |                                  |  |
|                                     | TAF: L3261-190725                                                                               |                                  | FCC: 291082, TW3261              |                                  |  |
| ISED: TW3261                        |                                                                                                 |                                  |                                  |                                  |  |

#### 1.4. Product Information

|                                                                                                                                                                     |                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Product Name                                                                                                                                                        | Barcode Reader                                                                                              |
| Model No.                                                                                                                                                           | DL36LT                                                                                                      |
| IMEI                                                                                                                                                                | 004403000215550                                                                                             |
| NFC Specification                                                                                                                                                   | 13.56MHz                                                                                                    |
| Wi-Fi Specification                                                                                                                                                 | 802.11a/b/g/n/ac                                                                                            |
| Bluetooth Specification                                                                                                                                             | v5.2 dual mode                                                                                              |
| GNSS Specification                                                                                                                                                  | GPS/GNSS/Beidou/Galileo/SBAS                                                                                |
| WPT Specification                                                                                                                                                   | 119-140kHz, WPT client type                                                                                 |
| Operating Temp.                                                                                                                                                     | -20 ~ 55°C                                                                                                  |
| 3GPP Specification                                                                                                                                                  | GSM 850/1900<br>WCDMA Band 2/4/5<br>LTE Band 2/4/5/7/12/13/17/25/26                                         |
| Power Type                                                                                                                                                          | 3.60 ~ 4.35Vdc, typical 3.8Vdc                                                                              |
| Accessories                                                                                                                                                         |                                                                                                             |
| AC Adapter                                                                                                                                                          | Model: S008ACM0500200<br>Input: 100-240V ~ 50/60Hz, 0.3A<br>Output: 5V, 2A, 10W                             |
| Rechargeable Li-ion Battery                                                                                                                                         | Model No.: BTDL36<br>Rated Voltage: 3.8V<br>Rated Capacity: 3980mAh/15.1Wh<br>Limited Charge Voltage: 4.35V |
| <p>Remark:</p> <p>The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.</p> |                                                                                                             |

### 1.5. Radio Specification Under Test

|                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FDD Tx Frequency Range                                                                                                                                                                                                                                                    | Band 2: 1850 ~ 1910 MHz; Band 4: 1710 ~ 1755 MHz<br>Band 5: 824 ~ 849 MHz; Band 7: 2500 ~ 2570 MHz<br>Band 12: 699 ~ 716 MHz; Band 13: 777 ~ 787 MHz<br>Band 17: 704 ~ 716 MHz; Band 25: 1850 ~ 1915 MHz<br>Band 26: 824 ~ 849 MHz |
| FDD Rx Frequency Range                                                                                                                                                                                                                                                    | Band 2: 1930 ~ 1990 MHz; Band 4: 2110 ~ 2155 MHz<br>Band 5: 869 ~ 894 MHz; Band 7: 2620 ~ 2690 MHz<br>Band 12: 729 ~ 746 MHz; Band 13: 746 ~ 756 MHz<br>Band 17: 734 ~ 746 MHz; Band 25: 1930 ~ 1995 MHz<br>Band 26: 869 ~ 894 MHz |
| Support Bandwidth                                                                                                                                                                                                                                                         | Band 2/4/25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz<br>Band 5/12: 1.4MHz, 3MHz, 5MHz, 10MHz<br>Band 7: 5MHz, 10MHz, 15MHz, 20MHz<br>Band 13/17: 5MHz, 10MHz<br>Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz                          |
| Modulation                                                                                                                                                                                                                                                                | UL & DL up to 64QAM                                                                                                                                                                                                                |
| Power Class                                                                                                                                                                                                                                                               | 3                                                                                                                                                                                                                                  |
| Remark: LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies. |                                                                                                                                                                                                                                    |

### 1.6. Description of Available Antennas

| Technology  | Frequency Range (MHz) | Antenna Type | Max Peak Gain (dBi) |
|-------------|-----------------------|--------------|---------------------|
| LTE Band 2  | 1850 ~ 1910           | PIFA         | 1.22                |
| LTE Band 4  | 1710 ~ 1755           |              | 2.46                |
| LTE Band 5  | 824 ~ 849             |              | 1.92                |
| LTE Band 7  | 2500 ~ 2570           |              | 1.72                |
| LTE Band 12 | 699 ~ 716             |              | -0.24               |
| LTE Band 13 | 777 ~ 787             |              | -0.43               |
| LTE Band 17 | 704 ~ 716             |              | -0.24               |
| LTE Band 25 | 1850 ~ 1915           |              | 1.22                |
| LTE Band 26 | 814 ~ 849             |              | 1.92                |

### **1.7. Test Methodology**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

### **1.8. Device Capabilities**

This device contains the following capabilities:

Working on LTE Band 2, 4, 5, 7, 12, 13, 17, 25, 26.


LTE Band 25 (1850 ~ 1915 MHz) overlaps the entire frequency range of LTE Band 2 (1850 ~ 1910 MHz).

Therefore, test data provided in this report covers Band 2 as well as Band 25.

LTE Band 26 (814 ~ 849 MHz) overlaps the entire frequency range of LTE Band 5 (824 ~ 849 MHz). Therefore, test data provided in this report covers Band 5 as well as Band 26.

## 2. Test Configuration

### 2.1. Test System Connection Diagram

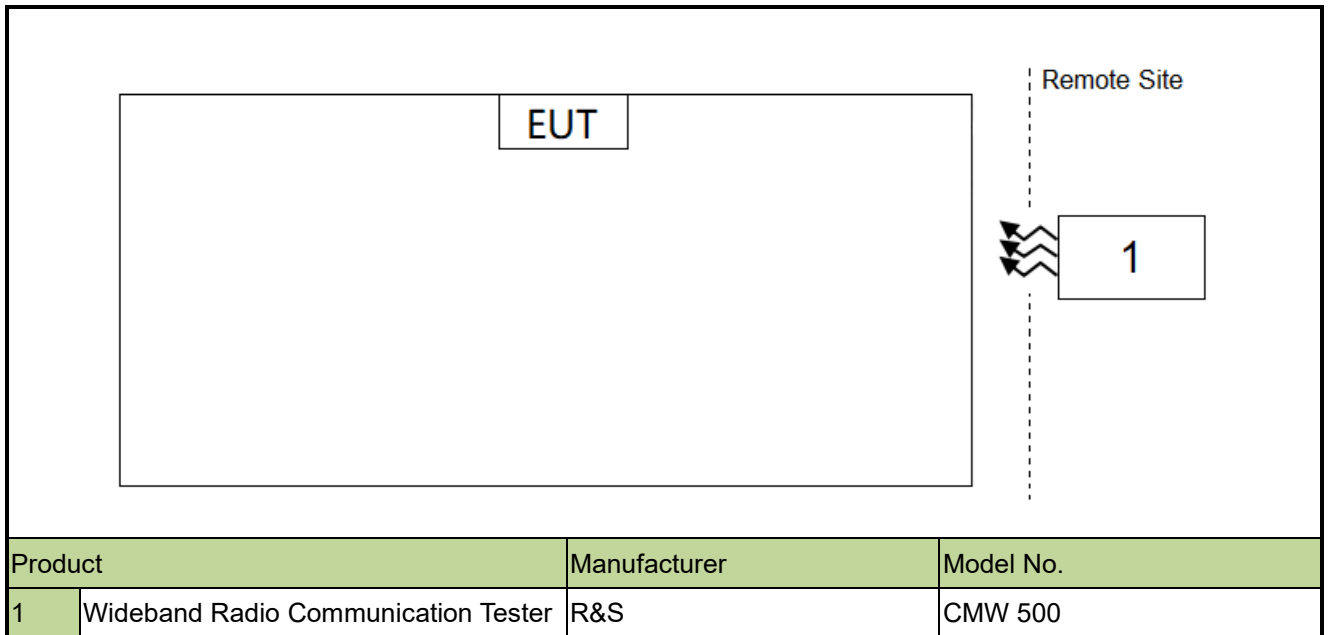

### 2.2. Test Environment Condition

|                     |             |
|---------------------|-------------|
| Ambient Temperature | 15 ~ 35°C   |
| Relative Humidity   | 20% ~ 75%RH |

### 3. Measuring Instrument

| Instrument                | Manufacturer | Model No.      | Asset No.   | Cali. Interval | Cali. Due Date | Test Site                           |
|---------------------------|--------------|----------------|-------------|----------------|----------------|-------------------------------------|
| Signal Analyzer           | Keysight     | N9010B         | MRTSUE07028 | 1 year         | 2022-12-09     | SIP-SR1                             |
| Signal Analyzer           | Keysight     | N9010B         | MRTSUE06559 | 1 year         | 2023-06-01     | SIP-SR1                             |
| Signal Analyzer           | Keysight     | N9010B         | MRTSUE06603 | 1 year         | 2022-10-31     | SIP-SR1                             |
| Communication Tester      | R&S          | CMW500         | MRTSUE06243 | 1 year         | 2022-10-10     | SIP-SR1                             |
| Signal Generator          | Keysight     | E8257D         | MRTSUE06453 | 1 year         | 2023-06-01     | SIP-SR1                             |
| Thermohygrometer          | testo        | 622            | MRTSUE06629 | 1 year         | 2023-01-06     | SIP-SR1                             |
| 5G Wireless Test Platform | Keysight     | E7515B         | MRTSUE06903 | 1 year         | 2022-11-23     | SIP-SR1                             |
| Signal Generator          | Keysight     | E8257D         | MRTSUE06904 | 1 year         | 2022-11-23     | SIP-SR1                             |
| DC POWER MODULE           | Keysight     | N6743B         | MRTSUE06905 | N/A            | N/A            | SIP-SR1                             |
| DC POWER MODULE           | Keysight     | N6743B         | MRTSUE06906 | N/A            | N/A            | SIP-SR1                             |
| Common Interface Unit     | Keysight     | E7770A         | MRTSUE06957 | N/A            | N/A            | SIP-SR1                             |
| Preamplifier              | Schwarzbeck  | BBV 9721       | MRTSUE06121 | 1 year         | 2023-06-08     | SIP-AC3                             |
| EMI Test Receiver         | R&S          | ESR3           | MRTSUE06185 | 1 year         | 2022-12-29     | SIP-AC1/SIP-AC2/SIP-AC3             |
| Signal Analyzer           | Keysight     | N9010B         | MRTSUE06559 | 1 year         | 2023-06-01     | SIP-AC1/SIP-AC2/SIP-AC3/<br>SIP-SR1 |
| Horn Antenna              | Schwarzbeck  | BBHA 9170      | MRTSUE06599 | 1 year         | 2022-10-20     | SIP-AC1/SIP-AC3                     |
| Preamplifier              | EMCI         | EMC184045SE    | MRTSUE06602 | 1 year         | 2022-10-11     | SIP-AC1/SIP-AC2/SIP-AC3             |
| Signal Analyzer           | Keysight     | N9010B         | MRTSUE06603 | 1 year         | 2022-10-31     | SIP-AC1/SIP-AC2/SIP-AC3/<br>SIP-SR1 |
| Signal Analyzer           | Keysight     | N9020B         | MRTSUE06604 | 1 year         | 2023-09-06     | SIP-AC1/SIP-AC2/SIP-AC3/<br>SIP-SR1 |
| Horn Antenna              | R&S          | HF907          | MRTSUE06611 | 1 year         | 2023-07-30     | SIP-AC3                             |
| EMI Test Receiver         | R&S          | ESR3           | MRTSUE06613 | 1 year         | 2023-06-01     | SIP-AC1/SIP-AC2/SIP-AC3             |
| Thermohygrometer          | testo        | 608-H1         | MRTSUE06619 | 1 year         | 2022-11-02     | SIP-AC3                             |
| Thermohygrometer          | testo        | 608-H1         | MRTSUE06622 | 1 year         | 2022-11-28     | SIP-AC3                             |
| Preamplifier              | EMCI         | EMC012645SE    | MRTSUE06642 | 1 year         | 2023-01-13     | SIP-AC3                             |
| Preamplifier              | EMCI         | EMC001330      | MRTSUE06643 | 1 year         | 2023-01-13     | SIP-AC1/SIP-AC2/SIP-AC3             |
| TRILOG Antenna            | Schwarzbeck  | VULB 9168      | MRTSUE06646 | 1 year         | 2023-08-16     | SIP-AC3                             |
| Anechoic Chamber          | RIKEN        | SIP-AC3        | MRTSUE06782 | 1 year         | 2022-12-23     | SIP-AC3                             |
| Loop Antenna              | Schwarzbeck  | FMZB 1519 B    | MRTSUE06937 | 1 year         | 2023-03-14     | SIP-AC1/SIP-AC2/SIP-AC3             |
| Directional Coupler       | ar           | DC7200A        | MRTSUE06147 | N/A            | N/A            | SIP                                 |
| Directional Coupler       | ar           | DC6080A        | MRTSUE06148 | N/A            | N/A            | SIP-SR1                             |
| Directional Coupler       | narda        | 4226-10        | MRTSUE06564 | 1 year         | 2022-10-11     | SIP-SR1                             |
| Directional Coupler       | PULSAR       | CS10-23-436/20 | MRTSUE06846 | 1 year         | 2023-06-02     | SIP-SR1                             |
| Directional Coupler       | PULSAR       | CS10-23-436/20 | MRTSUE06848 | 1 year         | 2023-06-02     | SIP-SR1                             |

|            |     |         |             |        |            |         |
|------------|-----|---------|-------------|--------|------------|---------|
| Attenuator | MVE | MVE2213 | MRTSUE11055 | 1 year | 2023-06-09 | SIP-SR1 |
| Attenuator | MVE | MVE2213 | MRTSUE11056 | 1 year | 2023-06-09 | SIP-SR1 |
| Attenuator | MVE | MVE2213 | MRTSUE11057 | 1 year | 2023-06-09 | SIP-SR1 |
| Attenuator | MVE | MVE2213 | MRTSUE11058 | 1 year | 2023-06-09 | SIP-SR1 |
| Attenuator | MVE | MVE2213 | MRTSUE11059 | 1 year | 2023-06-09 | SIP-SR1 |
| Attenuator | MVE | MVE2213 | MRTSUE11060 | 1 year | 2023-06-09 | SIP-SR1 |

| Software             | Version | Function               |
|----------------------|---------|------------------------|
| EMI Software         | V3.0.0  | EMI Test Software      |
| Controller_MF 7802BS | V1.02   | RE Antenna & Turntable |

## 4. Decision Rules and Measurement Uncertainty

### 4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.  
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

### 4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

| Radiated Spurious Emissions                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Measurement Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>Horizontal: 9kHz ~ 300MHz: 5.04dB<br>300MHz ~ 1GHz: 4.95dB<br>1GHz ~ 40GHz: 6.40dB<br>Vertical: 9kHz ~ 300MHz: 5.24dB<br>300MHz ~ 1GHz: 6.03dB<br>1GHz ~ 40GHz: 6.40dB |
| Conducted Spurious Emissions                                                                                                                                                                                                                        |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>0.78dB                                                                                                                                                                   |
| Output Power                                                                                                                                                                                                                                        |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>1.13dB                                                                                                                                                                   |
| Occupied Bandwidth                                                                                                                                                                                                                                  |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>0.28%                                                                                                                                                                    |
| Frequency Stability                                                                                                                                                                                                                                 |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>76.2Hz                                                                                                                                                                   |

## 5. Test Result

### 5.1. Summary

| FCC Part Section(s)                                             | Test Description                                       | Test Condition | Verdict |
|-----------------------------------------------------------------|--------------------------------------------------------|----------------|---------|
| 2.1049                                                          | Occupied Bandwidth                                     | Conducted      | Pass    |
| 2.1055, 22.355<br>24.235, 27.54                                 | Frequency Stability                                    |                | Pass    |
| 22.913(a)(5)                                                    | Equivalent Radiated Power (Band 5/26)                  |                | Pass    |
| 27.50(b)(9)<br>27.50(c)(9)                                      | Equivalent Radiated Power (Band 12, 13, 17)            |                |         |
| 24.232(c)<br>27.50(h)(2)<br>27.50(d)(4)                         | Equivalent Isotropic Radiated Power (Band 2/25, 7)     |                |         |
| 24.232(d), 27.50(d)(5)                                          | Peak to Average Ratio                                  |                | Pass    |
| 2.1051, 22.917(a)<br>24.238(a), 27.53(c),<br>27.53(g), 27.53(h) | Band Edge<br>(Band 2/25, 4, 5/26, 12, 13, 17, 71)      | Conducted      | Pass    |
| 27.53(m)                                                        | Band Edge<br>(Band 7)                                  |                |         |
| 2.1051, 22.917(a)<br>24.238(a), 27.53(c),<br>27.53(g), 27.53(h) | Spurious Emission<br>(Band 2/25, 4, 5/26, 12, 13, 17)  |                |         |
| 2.1051, 27.53(m)                                                | Spurious Emission<br>(Band 7)                          |                |         |
| 2.1053, 22.917(a)<br>24.238(a),<br>27.53(c) (f) (g) (h)         | Spurious Emissions<br>(Band 2/25, 4, 5/26, 12, 13, 17) | Radiated       | Pass    |
| 27.53(m)                                                        | Spurious Emissions<br>(Band 7)                         |                |         |

#### Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Conducted Spurious Emission, Radiated Spurious Emission were presented the worst-case in the test report.

## 5.2. Occupied Bandwidth Measurement

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### 5.2.4. Test Setup

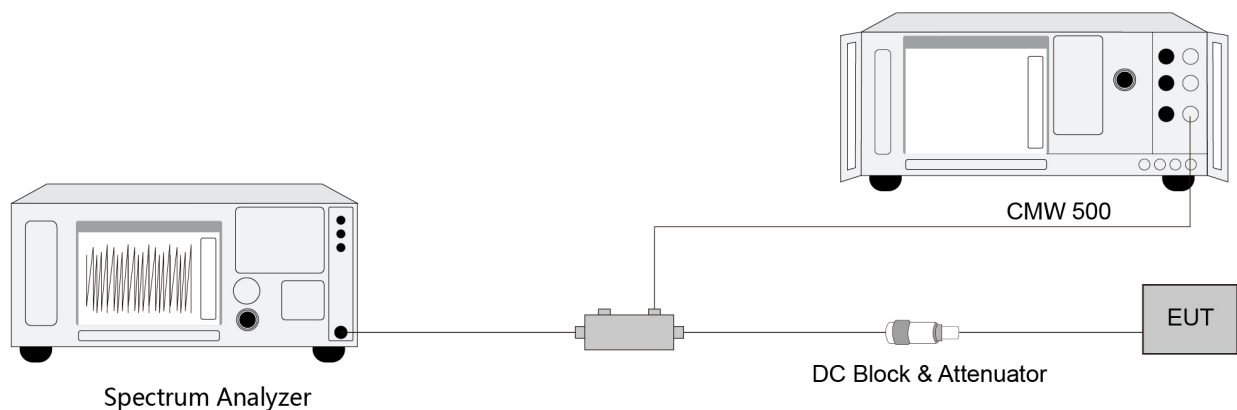

### 5.2.5. Test Result

Refer to Appendix A.1.

### **5.3. Frequency Stability Measurement**

#### **5.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **5.3.2. Test Procedure**

ANSI C63.26-2015 - Section 5.6

#### **5.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

#### 5.3.4. Test Setup

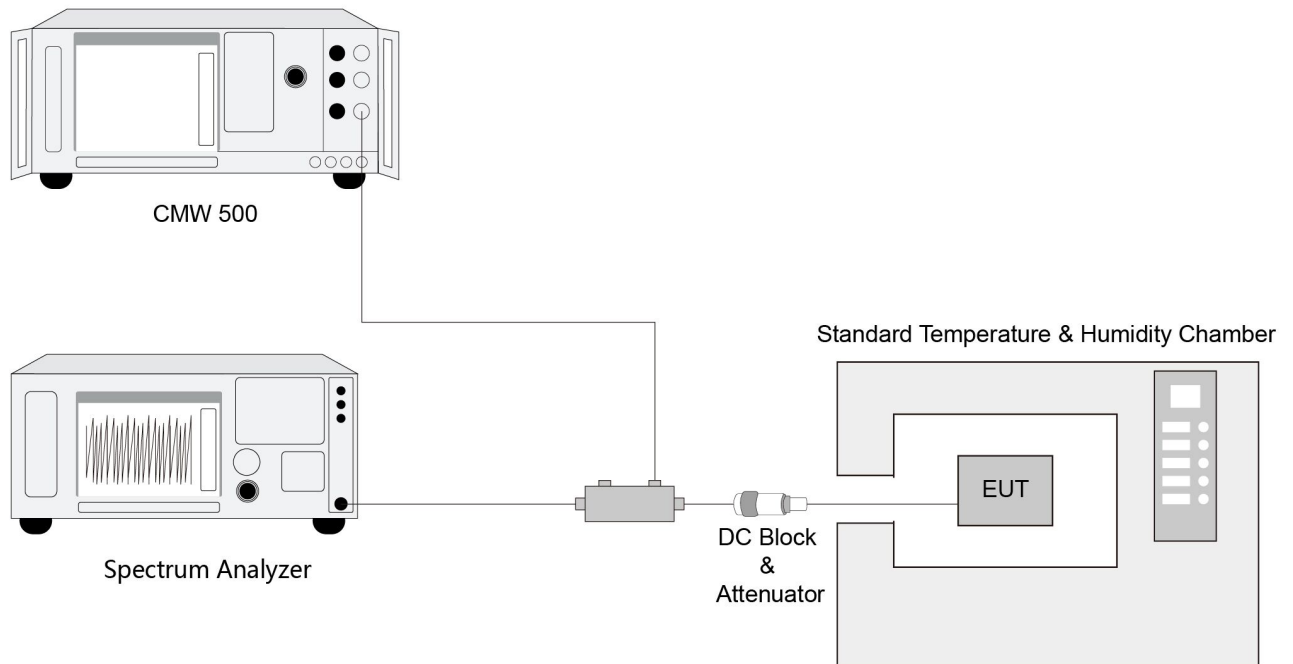

#### 5.3.5. Test Result

Refer to Appendix A.2.

## **5.4. Equivalent Isotropically Radiated Power Measurement**

### **5.4.1. Test Limit**

#### Band 5/26

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

#### Band 12, 13, 17

Control stations and mobile stations transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 30 watts ERP.

Control and mobile stations in the 698-746 MHz band are limited to 30 watts ERP.

#### Band 2/25, 7

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

#### Band 4

Fixed, mobile stations operating in the 1710-1755 MHz band and mobile in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

### **5.4.2. Test Procedure**

ANSI C63.26-2015 - Section 5.2

### 5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_T$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

$$\text{ERP} = \text{EIRP} - 2.15$$

### 5.4.4. Test Setup



### 5.4.5. Test Result

Refer to Appendix A.3.

## 5.5. Band Edge Measurement

### 5.5.1. Test Limit

#### 22.917(a), 24.238 (a), 27.53 (g) (h)

For operations in the 824 ~ 849 MHz, 1850 ~ 1910 MHz, 1930 ~ 1990 MHz, 600MHz & 698 ~ 746 MHz and 1710 ~ 1755 MHz, the FCC limit is  $43 + 10\log_{10}(P_{\text{Watts}})$  dB below the transmitter power  $P(\text{Watts})$  in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is  $43 + 10\log_{10}(P_{\text{Watts}})$  dB below the transmitter power  $P(\text{Watts})$  in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 Hz shall be attenuated below the transmitter power,  $P$  (dBW), by at least  $65 + 10 \log_{10} (P_{\text{Watts}})$ , dB, for mobile and portable equipment.

#### 27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


### 5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

### 5.5.3. Test Setting

1. Set the analyzer frequency to low or high channel
2.  $RBW \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $VBW \geq 3 \cdot RBW$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.5.4. Test Setup

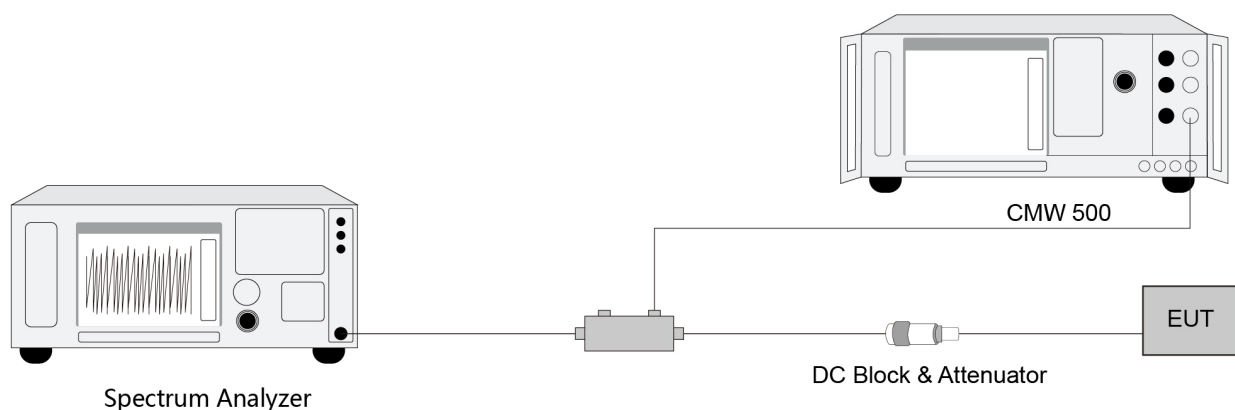

### 5.5.5. Test Result

Refer to Appendix A.4.

## 5.6. Peak to Average Ratio Measurement

### 5.6.1. Test Limit

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.


### 5.6.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.3.4 (CCDF).

### 5.6.3. Test Setting

1. Set the resolution / measurement bandwidth  $\geq$  signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Record the maximum PARR level associated with a probability of 0.1%

### 5.6.4. Test Setup

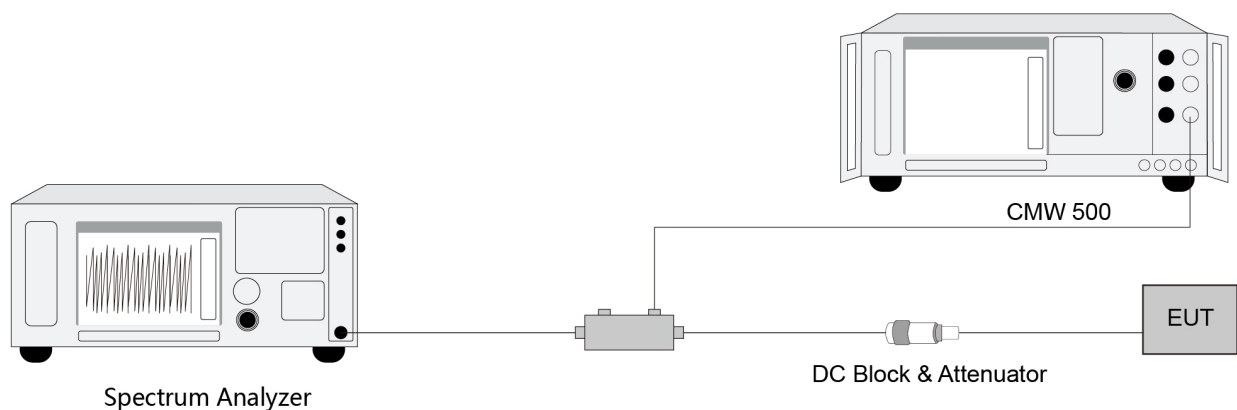

### 5.6.5. Test Result

Refer to Appendix A.5

## **5.7. Conducted Spurious Emissions Measurement**

### **5.7.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals.

For Band 7: For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

### **5.7.2. Test Procedure**


ANSI C63.26-2015 - Section 5.7

### **5.7.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to

increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 5.7.4. Test Setup

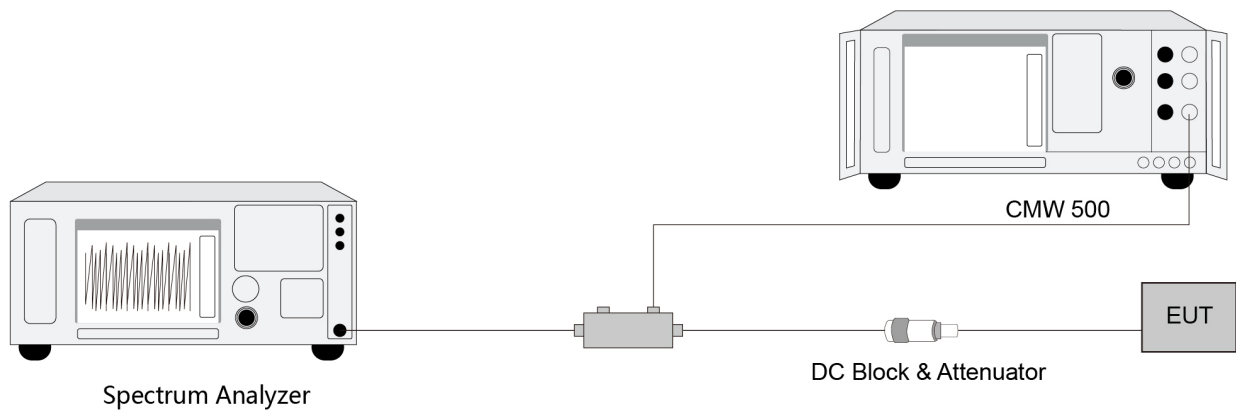

#### 5.7.5. Test Result

Refer to Appendix A.6

## **5.8. Radiated Spurious Emissions Measurement**

### **5.8.1. Test Limit**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

For Band 7: For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

For LTE Band 13, For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz (-40dBm/MHz) equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW (-50dBm) EIRP for discrete emissions of less than 700 Hz bandwidth.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$ ; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu$ V/m or 70.3dB $\mu$ V/m.

### **5.8.2. Test Procedure**


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### **5.8.3. Test Setting**


1. RBW = 1MHz
2. VBW  $\geq 3 \times$  RBW
3. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize

#### 5.8.4. Test Setup

##### Below 1GHz Test Setup:

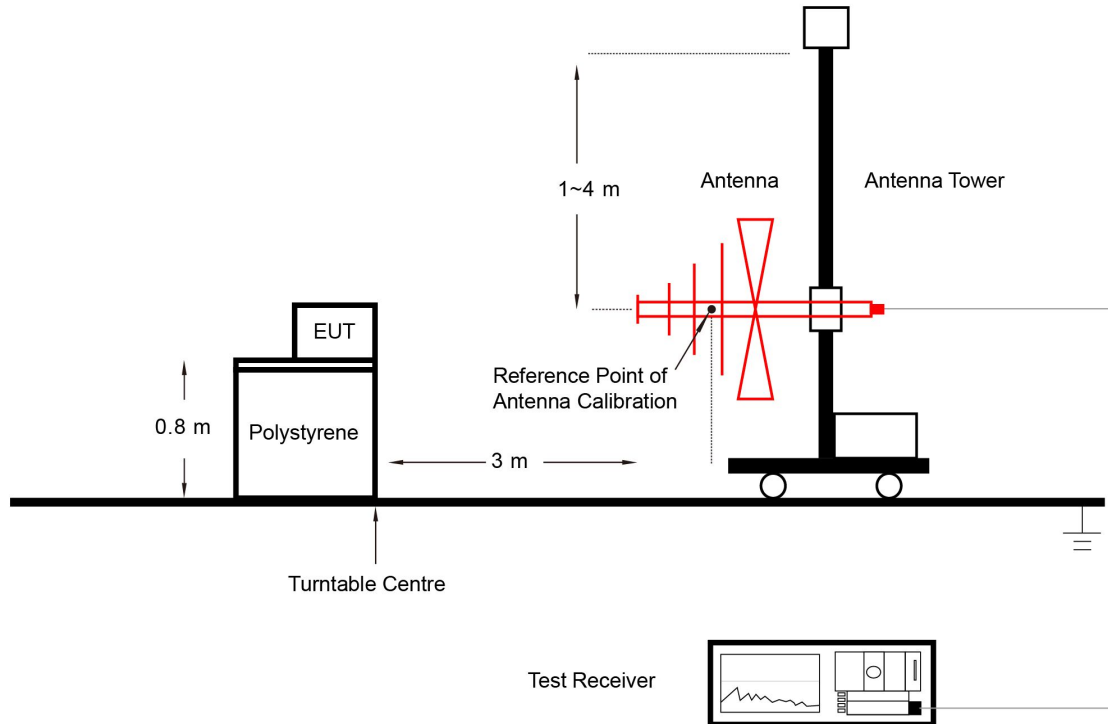

##### Above 1GHz Test Setup:

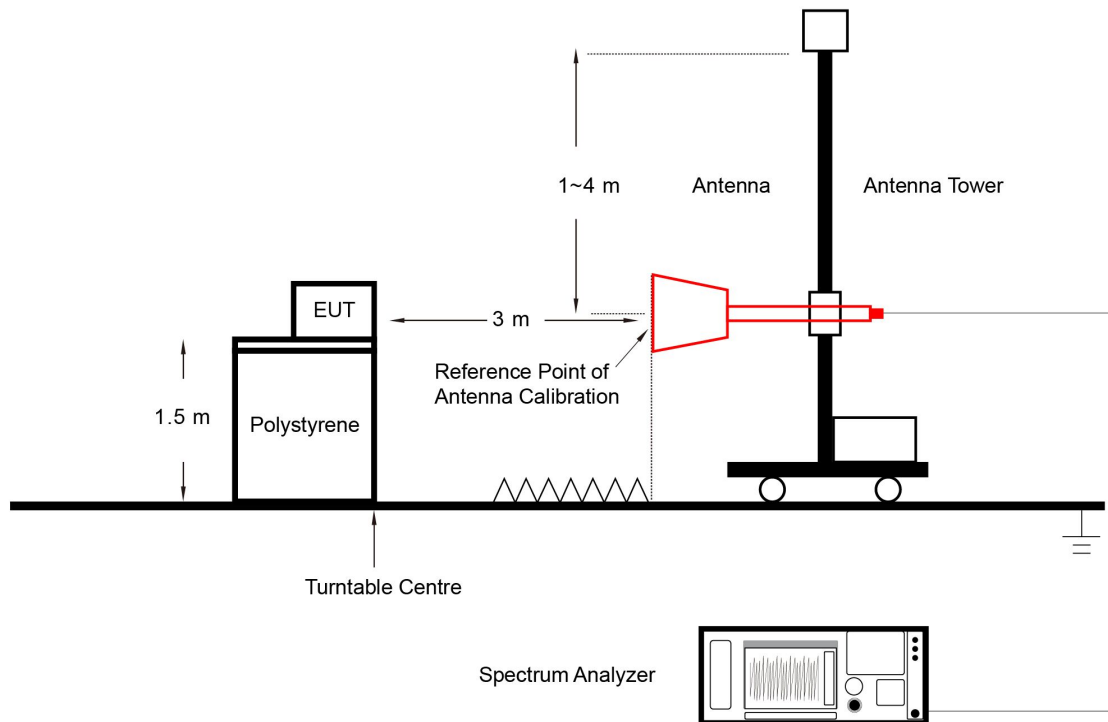

#### **5.8.5. Test Result**

Refer to Appendix A.7.

## Appendix A - Test Result


### A.1 Occupied Bandwidth Test Result

|           |                         |               |           |
|-----------|-------------------------|---------------|-----------|
| Test Site | SIP-SR1                 | Test Engineer | Allen Zou |
| Test Date | 2022/09/12 ~ 2022/09/22 | Test Band     | Band 2/25 |


| Modulation | Bandwidth (MHz) | Frequency (MHz) | 99% Bandwidth (MHz) |
|------------|-----------------|-----------------|---------------------|
| QPSK       | 1.4             | 1882.5          | 1.08                |
|            | 3               |                 | 2.68                |
|            | 5               |                 | 4.48                |
|            | 10              |                 | 8.94                |
|            | 15              |                 | 13.41               |
|            | 20              |                 | 17.83               |
| 16QAM      | 1.4             | 1882.5          | 1.08                |
|            | 3               |                 | 2.67                |
|            | 5               |                 | 4.46                |
|            | 10              |                 | 8.93                |
|            | 15              |                 | 13.41               |
|            | 20              |                 | 17.85               |
| 64QAM      | 1.4             | 1882.5          | 1.08                |
|            | 3               |                 | 2.68                |
|            | 5               |                 | 4.46                |
|            | 10              |                 | 8.94                |
|            | 15              |                 | 13.37               |
|            | 20              |                 | 17.86               |

## 99% Bandwidth - QPSK


## 1.4MHz Channel Bandwidth

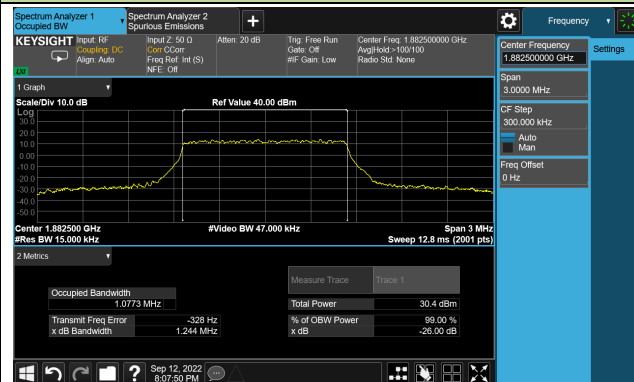


## 3MHz Channel Bandwidth

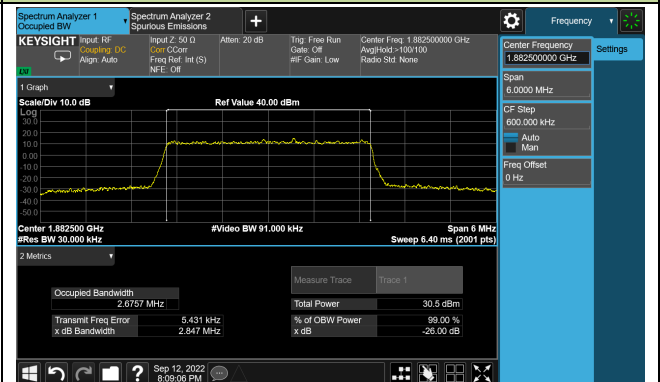


## 5MHz Channel Bandwidth

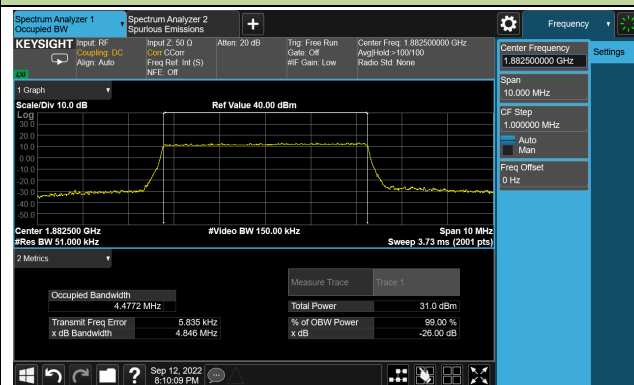


## 10MHz Channel Bandwidth

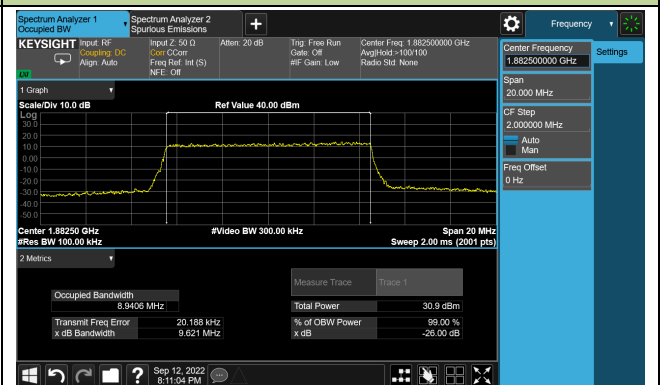

## 15MHz Channel Bandwidth

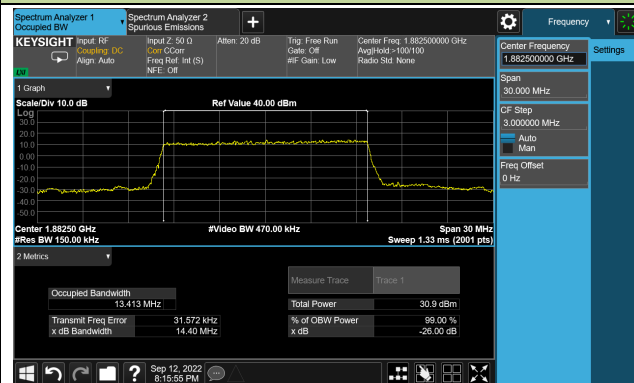


## 20MHz Channel Bandwidth

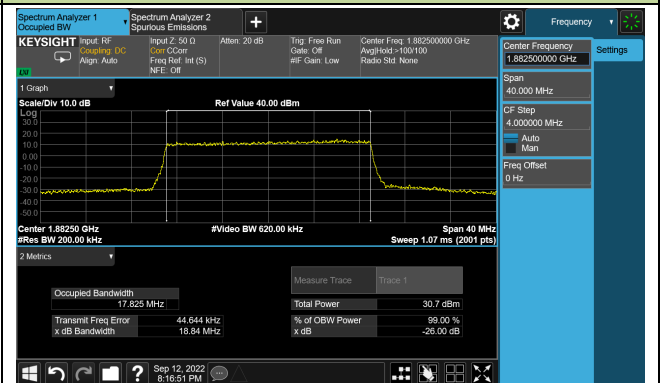


## 99% Bandwidth - 16QAM


## 1.4MHz Channel Bandwidth

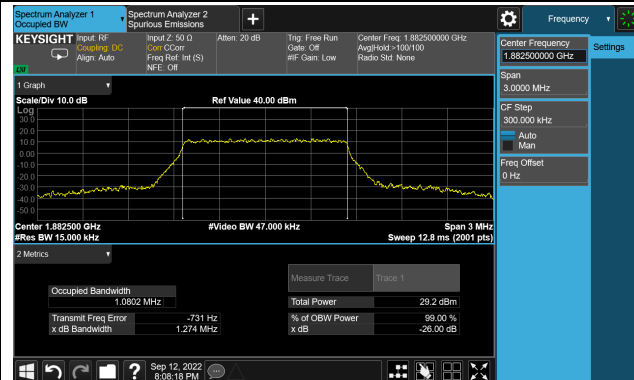


## 3MHz Channel Bandwidth

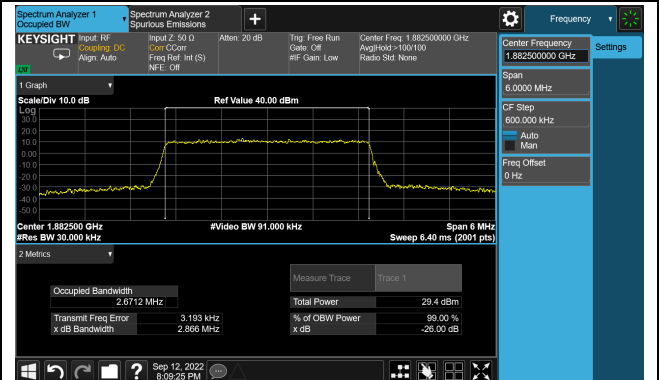


## 5MHz Channel Bandwidth

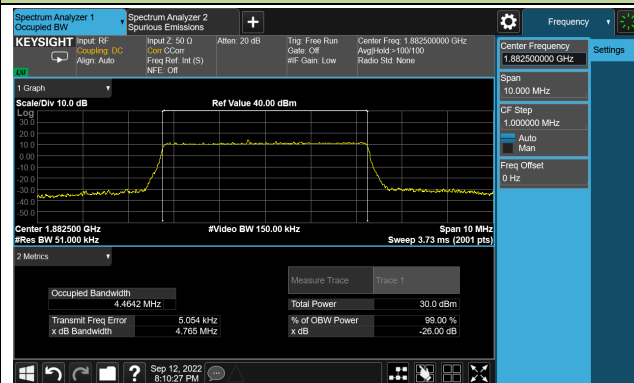


## 10MHz Channel Bandwidth

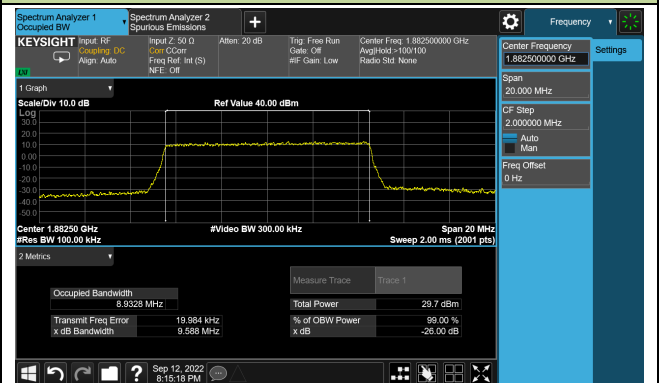

## 15MHz Channel Bandwidth

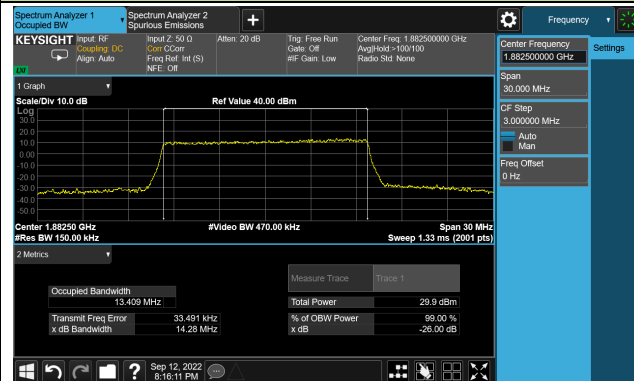


## 20MHz Channel Bandwidth

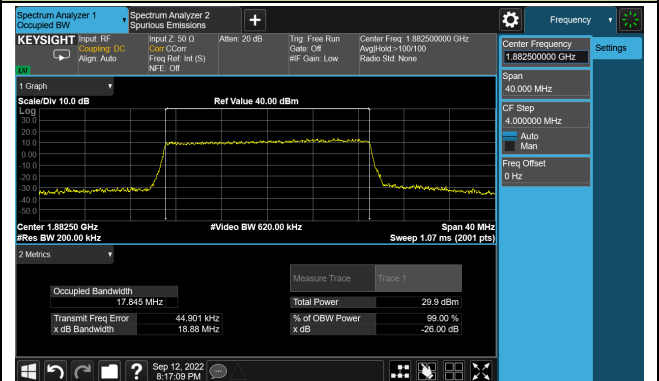


## 99% Bandwidth - 64QAM


## 1.4MHz Channel Bandwidth

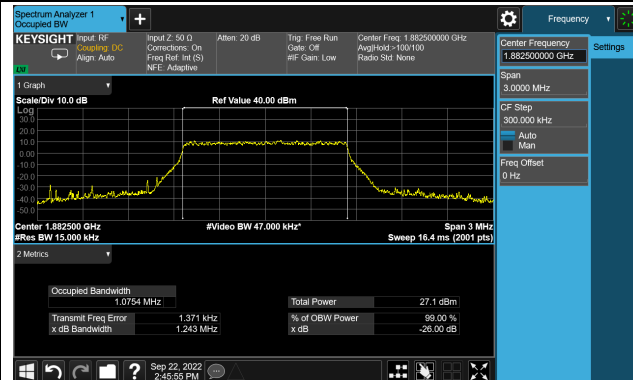


## 3MHz Channel Bandwidth

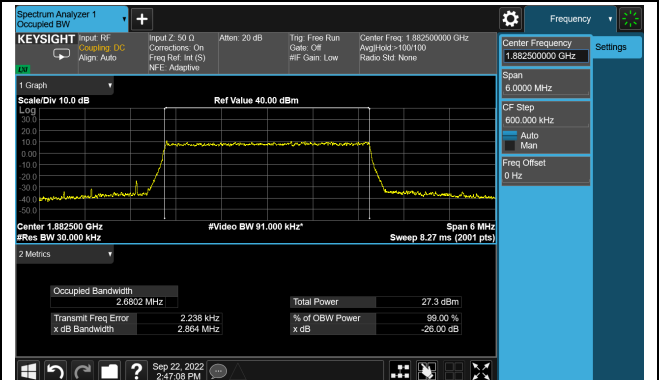


## 5MHz Channel Bandwidth

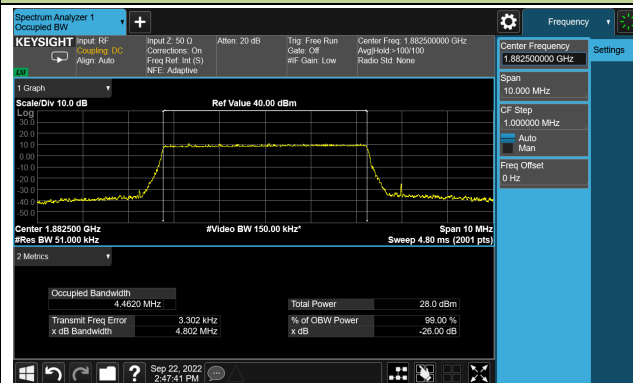


## 10MHz Channel Bandwidth

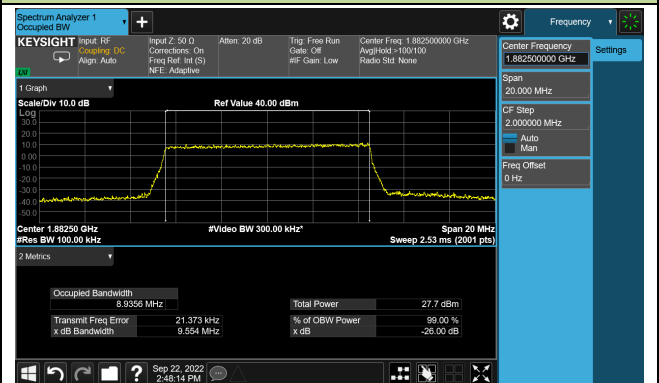

## 15MHz Channel Bandwidth

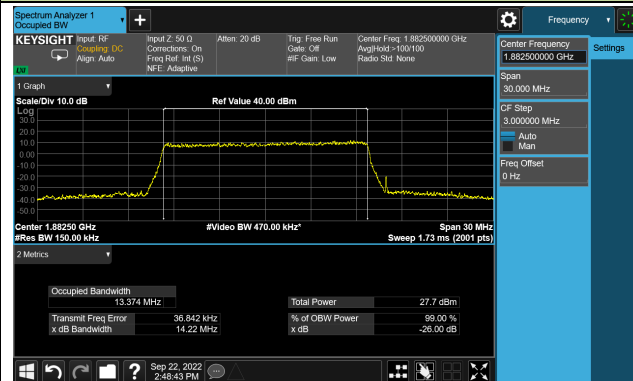

## 20MHz Channel Bandwidth

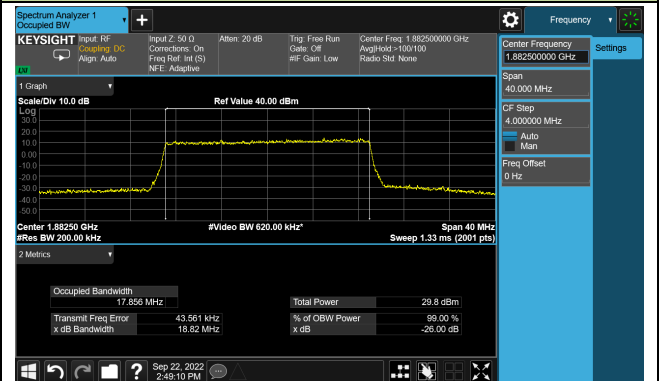


|           |                         |               |           |
|-----------|-------------------------|---------------|-----------|
| Test Site | SIP-SR1                 | Test Engineer | Allen Zou |
| Test Date | 2022/09/12 ~ 2022/09/22 | Test Band     | Band 4    |


| Modulation | Bandwidth (MHz) | Frequency (MHz) | 99% Bandwidth (MHz) |
|------------|-----------------|-----------------|---------------------|
| QPSK       | 1.4             | 1732.5          | 1.08                |
|            | 3               |                 | 2.67                |
|            | 5               |                 | 4.47                |
|            | 10              |                 | 8.95                |
|            | 15              |                 | 13.40               |
|            | 20              |                 | 17.86               |
| 16QAM      | 1.4             | 1732.5          | 1.08                |
|            | 3               |                 | 2.67                |
|            | 5               |                 | 4.47                |
|            | 10              |                 | 8.93                |
|            | 15              |                 | 13.40               |
|            | 20              |                 | 17.83               |
| 64QAM      | 1.4             | 1732.5          | 1.08                |
|            | 3               |                 | 2.68                |
|            | 5               |                 | 4.46                |
|            | 10              |                 | 8.93                |
|            | 15              |                 | 13.36               |
|            | 20              |                 | 17.83               |

## 99% Bandwidth - QPSK


## 1.4MHz Channel Bandwidth

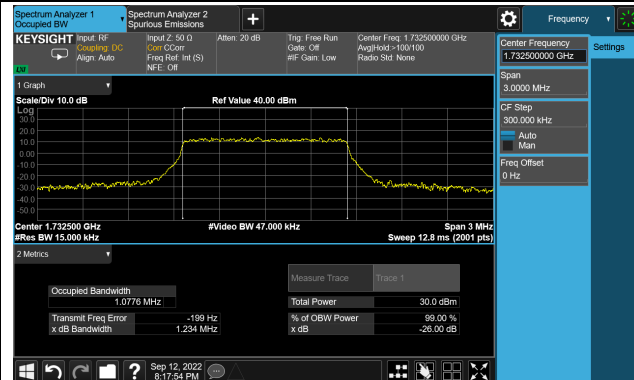


## 3MHz Channel Bandwidth

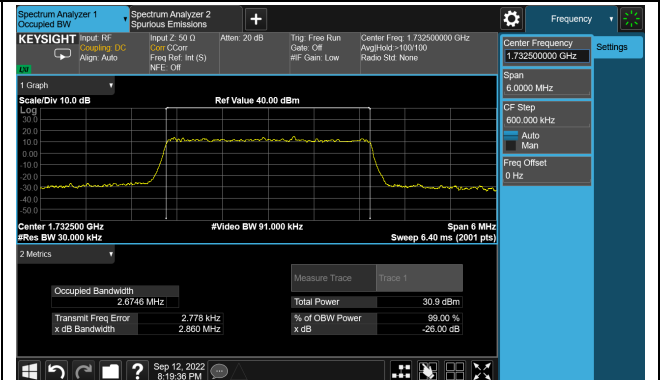


## 5MHz Channel Bandwidth

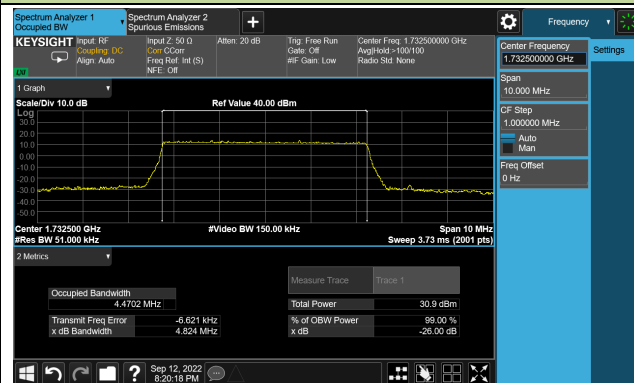


## 10MHz Channel Bandwidth

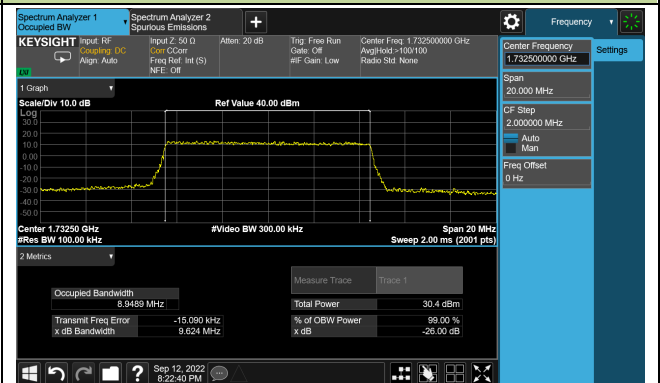

## 15MHz Channel Bandwidth

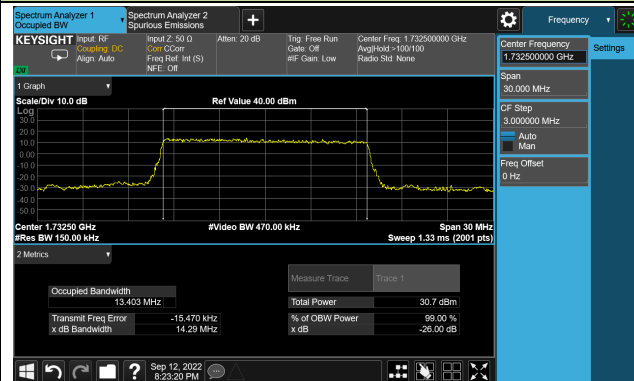


## 20MHz Channel Bandwidth

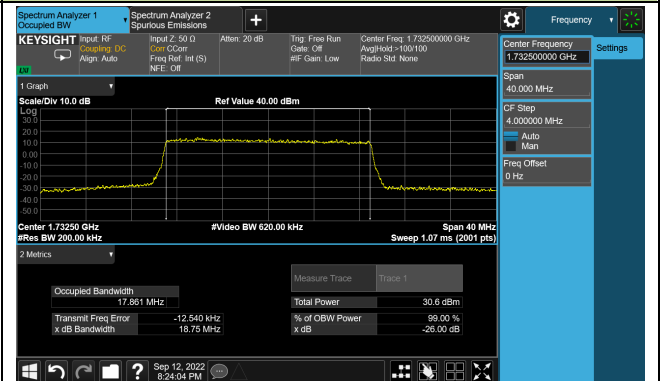


## 99% Bandwidth - 16QAM


## 1.4MHz Channel Bandwidth

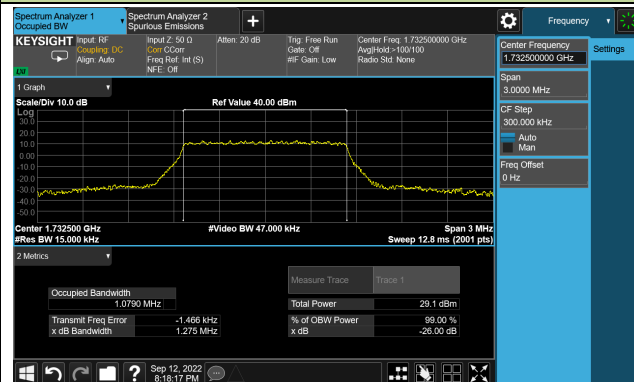


## 3MHz Channel Bandwidth

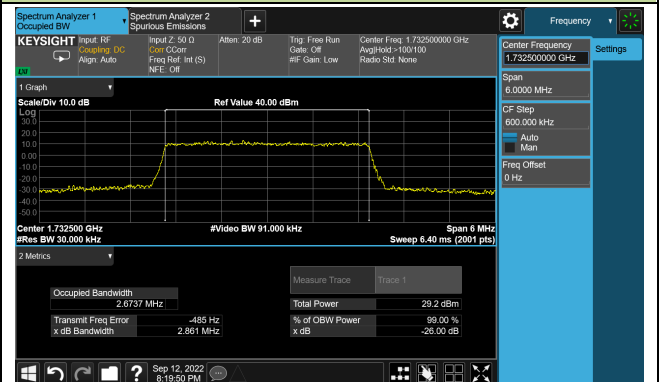


## 5MHz Channel Bandwidth

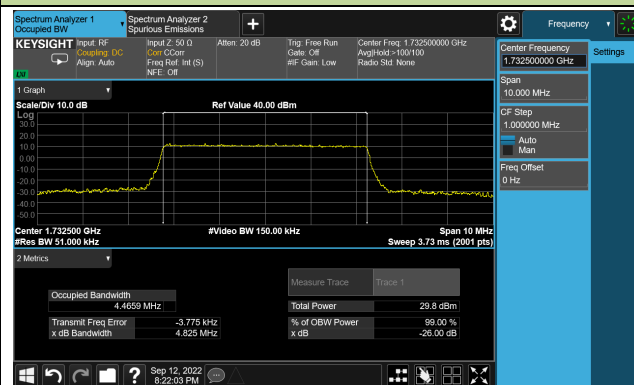


## 10MHz Channel Bandwidth

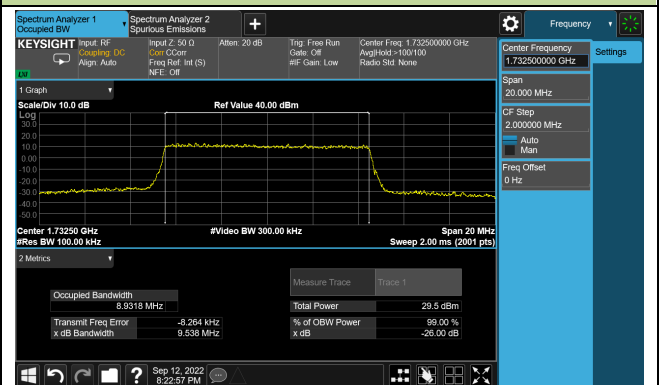

## 15MHz Channel Bandwidth

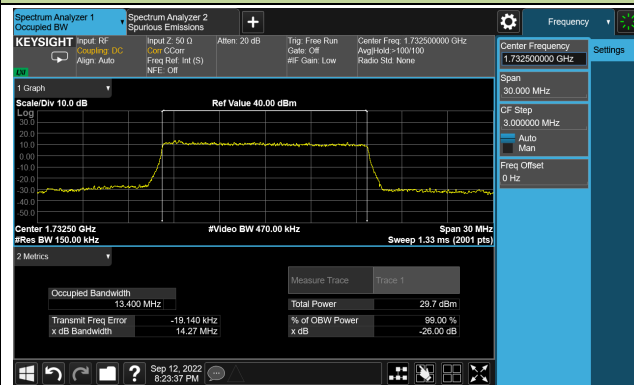


## 20MHz Channel Bandwidth

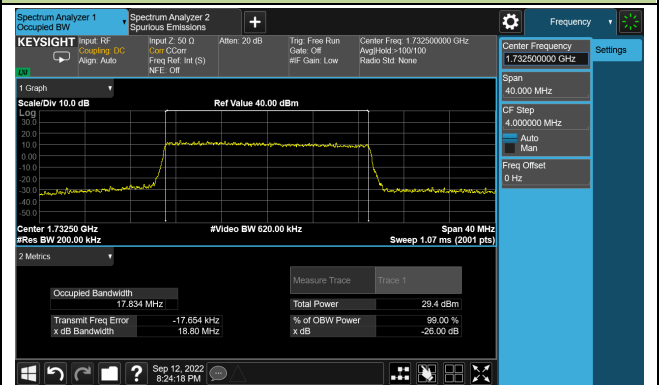


## 99% Bandwidth - 64QAM


## 1.4MHz Channel Bandwidth

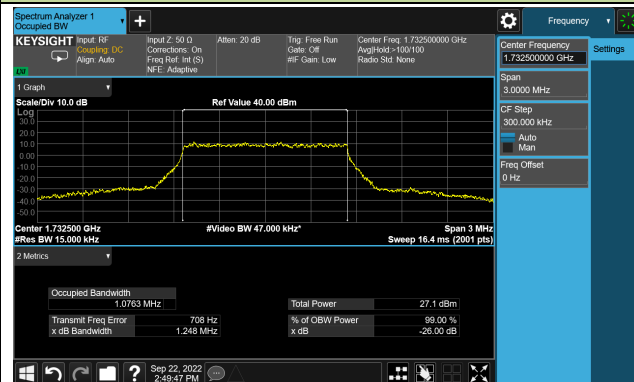


## 3MHz Channel Bandwidth

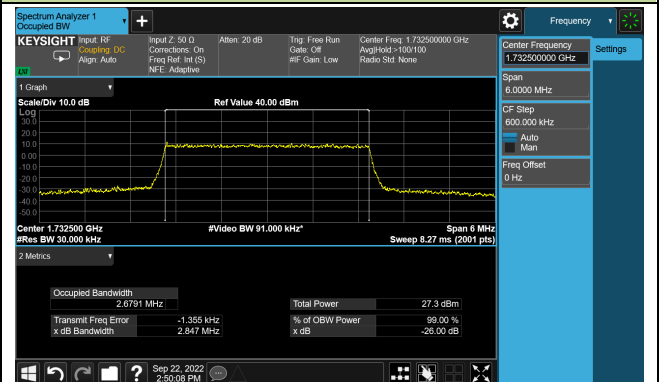


## 5MHz Channel Bandwidth

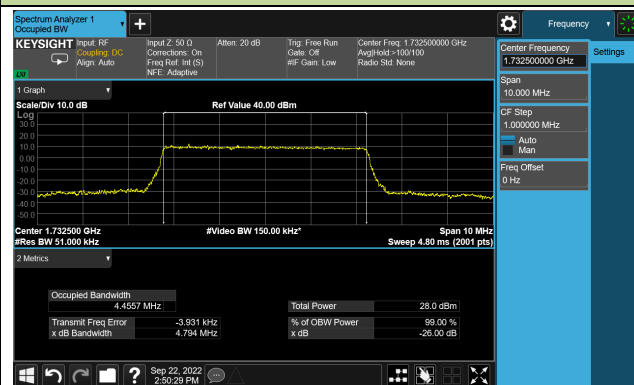


## 10MHz Channel Bandwidth

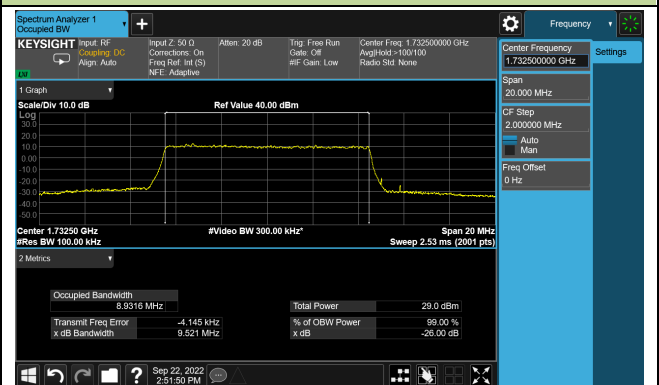

## 15MHz Channel Bandwidth

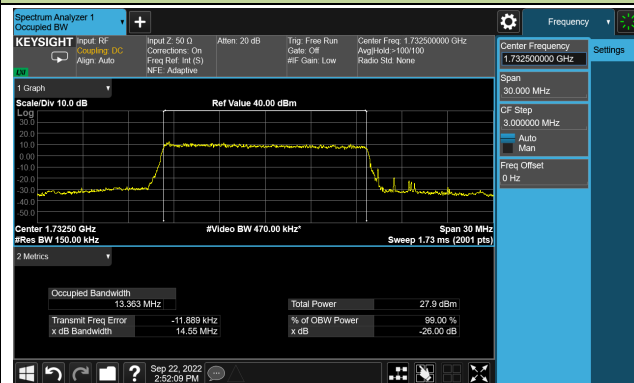

## 20MHz Channel Bandwidth

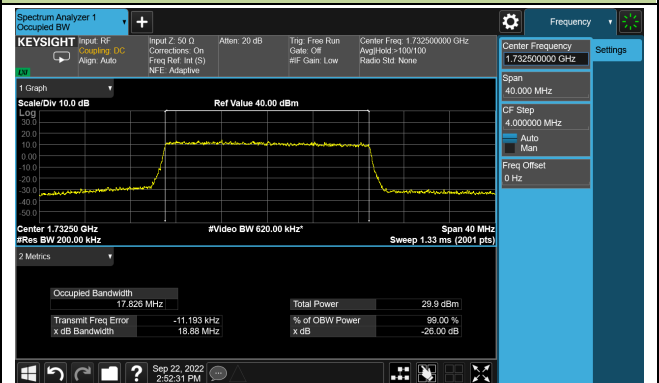

|           |                         |               |           |
|-----------|-------------------------|---------------|-----------|
| Test Site | SIP-SR1                 | Test Engineer | Allen Zou |
| Test Date | 2022/09/12 ~ 2022/09/22 | Test Band     | Band 5/26 |

| Modulation | Bandwidth (MHz) | Frequency (MHz) | 99% Bandwidth (MHz) |
|------------|-----------------|-----------------|---------------------|
| QPSK       | 1.4             | 836.5           | 1.08                |
|            | 3               |                 | 2.68                |
|            | 5               |                 | 4.47                |
|            | 10              |                 | 8.95                |
|            | 15              |                 | 13.41               |
|            | 15              | 821.5           | 13.43               |
| 16QAM      | 1.4             | 836.5           | 1.08                |
|            | 3               |                 | 2.67                |
|            | 5               |                 | 4.46                |
|            | 10              |                 | 8.95                |
|            | 15              |                 | 13.41               |
|            | 15              | 821.5           | 13.43               |
| 64QAM      | 1.4             | 836.5           | 1.08                |
|            | 3               |                 | 2.68                |
|            | 5               |                 | 4.46                |
|            | 10              |                 | 8.93                |
|            | 15              |                 | 13.39               |
|            | 15              | 821.5           | 13.37               |