

**CFR 47 FCC PART 15 SUBPART E  
ISED RSS-248 ISSUE 3**

**TEST REPORT**

*For*

**MOBILE COMPUTER WITH BARCODE READER**

**MODEL NUMBER: JTSHGUN**

**REPORT NUMBER: 4791876636-1-RF-5**

**ISSUE DATE: October 23, 2025**

**FCC ID: U4GJTSHGUN  
IC:3862E-JTSHGUN**

*Prepared for*

**Datalogic S.r.l.  
Via San Vitalino, 13  
40012 Lippo di Calderara di Reno (BO) - Italy**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,  
Guangdong, China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

## Revision History

| Rev. | Issue Date       | Revisions     | Revised By |
|------|------------------|---------------|------------|
| V0   | October 23, 2025 | Initial Issue |            |

## Summary of Test Results

| Test Item                                                                                | Clause                                               | Limit/Requirement                                                                               | Result |
|------------------------------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------|
| On Time And Duty Cycle                                                                   | ANSI C63.10-2020, Clause 12.2                        | None; for reporting purposes only.                                                              | Pass   |
| 26dB Emission Bandwidth And 99% Occupied Bandwidth                                       | KDB 789033 D02 v02r01 Section C.1                    | FCC Part 15.407 (a) (10)<br>RSS-248 Issue 3, Clause 4.4<br>RSS-Gen Clause 6.7                   | Pass   |
| Conducted Output Power                                                                   | KDB 789033 D02 v02r01 Section E.3.a (Method PM)      | FCC 15.407 (a)<br>RSS-248 Issue 3, Clause 4.5                                                   | Pass   |
| Power Spectral Density                                                                   | KDB 789033 D02 v02r01 Section F                      | FCC 15.407 (a)<br>RSS-248 Issue 3, Clause 4.5                                                   | Pass   |
| In-Band Emissions (Mask)                                                                 | KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 J   | FCC 15.407 (b)<br>RSS-248 Issue 3, Clause 4.6                                                   | Pass   |
| Frequency Stability                                                                      | ANSI C63.10-2020, Clause 6.8                         | FCC 15.407 (g)                                                                                  | Pass   |
| Contention-based Protocol                                                                | KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 I   | FCC 15.407 (d) (6)<br>RSS-248 Issue 3, Clause 4.8.6                                             | Pass   |
| Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP        | KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 K   | FCC 15.407 (a) (7)<br>RSS-248 Issue 3, Clause 4.7                                               | Pass   |
| Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC) | KDB 987594 D02 U-NII 6GHz EMC Measurement v01r01 L   | FCC 15.407 (a) (7)<br>RSS-248 Issue 3, Clause 4.7                                               | Pass   |
| Radiated Emissions And Band Edge Measurement                                             | KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6 | FCC 15.407 (b)<br>FCC 15.209<br>FCC 15.205<br>RSS-248 Issue 3, Clause 4.6<br>RSS-GEN Clause 8.9 | Pass   |
| AC Power Line Conducted Emission                                                         | ANSI C63.10-2020, Clause 6.2.                        | FCC 15.207<br>RSS-GEN Clause 8.8                                                                | Pass   |
| Antenna Requirement                                                                      | N/A                                                  | FCC 47 CFR Part 15.203/<br>15.407(a)(1) (2),<br>RSS-Gen Issue 5, Clause 6.8                     | Pass   |

Note: For ISED, this report is also performed according to ANSI C63.10-2020+Cor.1-2023 standards.

\*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

\*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E, ISED RSS-248 ISSUE 3> when <Simple Acceptance> decision rule is applied.

## CONTENTS

|                                                                                                                   |           |
|-------------------------------------------------------------------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS.....</b>                                                                        | <b>7</b>  |
| <b>2. TEST METHODOLOGY.....</b>                                                                                   | <b>8</b>  |
| <b>3. FACILITIES AND ACCREDITATION.....</b>                                                                       | <b>8</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>                                                                       | <b>9</b>  |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>                                                                | <i>9</i>  |
| 4.2. <i>MEASUREMENT UNCERTAINTY .....</i>                                                                         | <i>9</i>  |
| <b>5. EQUIPMENT UNDER TEST .....</b>                                                                              | <b>10</b> |
| 5.1. <i>DESCRIPTION OF EUT .....</i>                                                                              | <i>10</i> |
| 5.2. <i>CHANNEL LIST .....</i>                                                                                    | <i>11</i> |
| 5.3. <i>MAXIMUM POWER .....</i>                                                                                   | <i>14</i> |
| 5.4. <i>TEST CHANNEL CONFIGURATION .....</i>                                                                      | <i>14</i> |
| 5.5. <i>THE WORSE CASE POWER SETTING PARAMETER .....</i>                                                          | <i>16</i> |
| 5.6. <i>WORSE CASE CONFIGURATIONS.....</i>                                                                        | <i>20</i> |
| 5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>                                                               | <i>21</i> |
| 5.8. <i>SUPPORT UNITS FOR SYSTEM TEST .....</i>                                                                   | <i>23</i> |
| <b>6. MEASURING EQUIPMENT AND SOFTWARE USED.....</b>                                                              | <b>25</b> |
| <b>7. ANTENNA PORT TEST RESULTS .....</b>                                                                         | <b>28</b> |
| 7.1. <i>ON TIME AND DUTY CYCLE .....</i>                                                                          | <i>28</i> |
| 7.2. <i>26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>                                               | <i>29</i> |
| 7.3. <i>CONDUCTED OUTPUT POWER .....</i>                                                                          | <i>31</i> |
| 7.4. <i>POWER SPECTRAL DENSITY .....</i>                                                                          | <i>34</i> |
| 7.5. <i>IN-BAND EMISSIONS (MASK) .....</i>                                                                        | <i>37</i> |
| 7.6. <i>FREQUENCY STABILITY.....</i>                                                                              | <i>39</i> |
| 7.7. <i>CONTENTION-BASED PROTOCOL .....</i>                                                                       | <i>41</i> |
| 7.8. <i>DUAL CLIENT TEST, DEMONSTRATION OF PROPER POWER ADJUSTMENT<br/>    BASED ON ASSOCIATED AP .....</i>       | <i>45</i> |
| 7.9. <i>PROPER POWER ADJUSTMENT, CLIENT DEVICES CONNECTED TO A<br/>    STANDARD POWER ACCESS POINT (APC).....</i> | <i>47</i> |
| <b>8. RADIATED TEST RESULTS .....</b>                                                                             | <b>49</b> |
| 8.1. <i>RESTRICTED BANDEDGE .....</i>                                                                             | <i>57</i> |
| 8.2. <i>RESTRICTED BANDEDGE PARTIAL RU .....</i>                                                                  | <i>79</i> |
| 8.3. <i>SPURIOUS EMISSIONS(1 GHZ~9 GHZ) .....</i>                                                                 | <i>91</i> |

|            |                                                                                                       |            |
|------------|-------------------------------------------------------------------------------------------------------|------------|
| 8.4.       | SPURIOUS EMISSIONS(9 GHZ~18 GHZ) .....                                                                | 115        |
| 8.5.       | SPURIOUS EMISSIONS(9 GHZ~18 GHZ) PARTIAL RU.....                                                      | 221        |
| 8.6.       | SPURIOUS EMISSIONS(9 KHZ~30 MHZ) .....                                                                | 245        |
| 8.7.       | SPURIOUS EMISSIONS(18 GHZ~26 GHZ) .....                                                               | 248        |
| 8.8.       | SPURIOUS EMISSIONS(26 GHZ~40 GHZ) .....                                                               | 250        |
| 8.9.       | SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....                                                                 | 252        |
| <b>9.</b>  | <b>AC POWER LINE CONDUCTED EMISSION .....</b>                                                         | <b>254</b> |
| <b>10.</b> | <b>ANTENNA REQUIREMENT .....</b>                                                                      | <b>258</b> |
| <b>11.</b> | <b>TEST DATA.....</b>                                                                                 | <b>259</b> |
| 11.1.      | APPENDIX A1: EMISSION BANDWIDTH.....                                                                  | 259        |
| 11.1.1.    | Test Result-Indoor Client .....                                                                       | 259        |
| 11.1.2.    | Test Graphs-Indoor Client.....                                                                        | 263        |
| 11.1.3.    | Test Result-Standard Power Client .....                                                               | 323        |
| 11.1.4.    | Test Graphs-Standard Power Client.....                                                                | 325        |
| 11.2.      | APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH.....                                                          | 357        |
| 11.2.1.    | Test Result-Indoor Client .....                                                                       | 357        |
| 11.2.2.    | Test Graphs-Indoor Client.....                                                                        | 361        |
| 11.2.3.    | Test Result-Standard Power Client .....                                                               | 421        |
| 11.2.4.    | Test Graphs-Standard Power Client.....                                                                | 423        |
| 11.3.      | APPENDIX B: DUTY CYCLE.....                                                                           | 454        |
| 11.3.1.    | Test Result.....                                                                                      | 454        |
| 11.3.2.    | Test Graphs .....                                                                                     | 455        |
| 11.4.      | APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....                                                       | 458        |
| 11.4.1.    | Test Result-Indoor Client .....                                                                       | 458        |
| 11.4.2.    | Test Result-Standard Power Client .....                                                               | 463        |
| 11.5.      | APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....                                                       | 466        |
| 11.5.1.    | Test Result-Indoor Client .....                                                                       | 466        |
| 11.5.2.    | Test Graphs-Indoor Client.....                                                                        | 471        |
| 11.5.3.    | Test Result-Standard Power Client .....                                                               | 531        |
| 11.5.4.    | Test Graphs-Standard Power Client.....                                                                | 534        |
| 11.6.      | APPENDIX E: IN-BAND EMISSIONS .....                                                                   | 565        |
| 11.6.1.    | Test Result-Indoor Client .....                                                                       | 565        |
| 11.6.2.    | Test Graphs-Indoor Client.....                                                                        | 567        |
| 11.6.3.    | Test Result-Standard Power Client .....                                                               | 597        |
| 11.6.4.    | Test Graphs-Standard Power Client.....                                                                | 598        |
| 11.7.      | APPENDIX F: CONTENTION BASED PROTOCOL .....                                                           | 614        |
| 11.7.1.    | Test Result.....                                                                                      | 614        |
| 11.7.2.    | Test Graphs .....                                                                                     | 620        |
| 11.8.      | APPENDIX G: DUAL CLIENT TEST, DEMONSTRATION OF PROPER POWER<br>ADJUSTMENT BASED ON ASSOCIATED AP..... | 622        |
| 11.8.1.    | Test Result.....                                                                                      | 622        |

|          |                                                                                                            |     |
|----------|------------------------------------------------------------------------------------------------------------|-----|
| 11.9.    | APPENDIX H: PROPER POWER ADJUSTMENT, CLIENT DEVICES CONNECTED TO A STANDARD POWER ACCESS POINT (APC) ..... | 623 |
| 11.9.1.  | Test Result.....                                                                                           | 623 |
| 11.10.   | APPENDIX I: FREQUENCY STABILITY.....                                                                       | 625 |
| 11.10.1. | Test Result.....                                                                                           | 625 |

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Datalogic S.r.l.  
Address: Via San Vitalino, 13  
40012 Lippo di Calderara di Reno (BO) - Italy

### Manufacturer Information


Company Name: Datalogic S.r.l.  
Address: Via San Vitalino, 13  
40012 Lippo di Calderara di Reno (BO) - Italy

### EUT Information

EUT Name: MOBILE COMPUTER WITH BARCODE READER  
Model: JTSHGUN  
HVIN: JTSH GUN  
Brand: DATALOGIC  
Sample Received Date: July 6, 2025  
Sample Status: Normal  
Sample ID: 8740849  
Date of Tested: July 7, 2025 to October 22, 2025


| APPLICABLE STANDARDS                                 |              |
|------------------------------------------------------|--------------|
| STANDARD                                             | TEST RESULTS |
| CFR 47 FCC PART 15 SUBPART E<br>ISED RSS-248 ISSUE 3 | Pass         |

Prepared By:



Fanny Huang  
Project Engineer

Checked By:



Kebo Zhang  
Operations Leader

Approved By:



Stephen Guo  
Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E ISED RSS-248 ISSUE 3, ANSI C63.10-2020, ANSI C63.10-2020+Cor.1-2023, CFR 47 FCC Part 2, CFR 47 FCC Part 15, KDB 789033 D02 v02r01, RSS-GEN Issue 5, RSS-248 Issue 3, KDB414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB987594 D01 U-NII 6GHz General Requirements v02r02, KDB987594 D02 U-NII 6 GHz EMC Measurement v02v01.

## 3. FACILITIES AND ACCREDITATION

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accreditation Certificate | <p><b>A2LA (Certificate No.: 4102.01)</b><br/>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b><br/>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p><b>ISED (Company No.: 21320)</b><br/>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202)</b><br/>UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.<br/>Facility Name:<br/>Chamber E, the VCCI registration No. is G-20240 and R-20248<br/>Shielding Room F, the VCCI registration No. is C-20202 and T-20202</p> |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Item                                                                                                                                     | Uncertainty               |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Conduction emission                                                                                                                           | 3.62 dB                   |
| Radiated Emission<br>(Included Fundamental Emission) (9 kHz ~ 30 MHz)                                                                         | 2.2 dB                    |
| Radiated Emission<br>(Included Fundamental Emission) (30 MHz ~ 1 GHz)                                                                         | 4.00 dB                   |
| Radiated Emission<br>(Included Fundamental Emission) (1 GHz to 40 GHz)                                                                        | 5.78 dB (1 GHz ~ 18 GHz)  |
|                                                                                                                                               | 5.23 dB (18 GHz ~ 26 GHz) |
|                                                                                                                                               | 5.37 dB (26 GHz ~ 40 GHz) |
| Duty Cycle                                                                                                                                    | ±0.028%                   |
| Emission Bandwidth and 99% Occupied Bandwidth                                                                                                 | ±0.0196%                  |
| Maximum Conducted Output Power                                                                                                                | ±0.766 dB                 |
| Maximum Power Spectral Density Level                                                                                                          | ±1.22 dB                  |
| Frequency Stability                                                                                                                           | ±2.76%                    |
| Dynamic Frequency Selection                                                                                                                   | ±1.01 dB                  |
| In-Band Emissions (Mask)                                                                                                                      | ±1.328 dB                 |
| Contention-based Protocol                                                                                                                     | ±1 ms                     |
| Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP                                                             | ±0.5 dB                   |
| Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point (APC)                                                      | ±0.5 dB                   |
| Conducted Unwanted Emissions In Non-restricted Frequency Bands                                                                                | ±0.746 dB (9 kHz ~ 1 GHz) |
|                                                                                                                                               | ±1.328dB (1 GHz ~ 26 GHz) |
| Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. |                           |

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

|          |                                     |
|----------|-------------------------------------|
| EUT Name | MOBILE COMPUTER WITH BARCODE READER |
| Model    | JTSHGUN                             |
| HVIN     | JTSH GUN                            |

|                      |                                                                                                                                          |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Radio Technology:    | IEEE802.11a/ax HE20/HE40/HE80/HE160                                                                                                      |
| Operation Frequency: | UNII-5 Band: 5925MHz ~ 6425 MHz<br>UNII-6 Band: 6425MHz ~ 6525 MHz<br>UNII-7 Band: 6525MHz ~ 6875 MHz<br>UNII-8 Band: 6875MHz ~ 7125 MHz |
| Type of Modulation:  | IEEE 802.11a: OFDM (BPSK, QPSK,16QAM,64QAM)<br>IEEE 802.11ax: OFDMA (BPSK, QPSK,16QAM,64QAM, 256QAM, 1024QAM)                            |
| Equipment classes:   | 6CD                                                                                                                                      |
| Normal Test Voltage: | DC 3.635V via battery                                                                                                                    |

## 5.2. CHANNEL LIST

| UNII-5 (For Bandwidth=20MHz) |                 |         |                 |         |                 |
|------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1                            | 5955            | 33      | 6115            | 65      | 6275            |
| 5                            | 5975            | 37      | 6135            | 69      | 6295            |
| 9                            | 5995            | 41      | 6155            | 73      | 6315            |
| 13                           | 6015            | 45      | 6175            | 77      | 6335            |
| 17                           | 6035            | 49      | 6195            | 81      | 6355            |
| 21                           | 6055            | 53      | 6215            | 85      | 6375            |
| 25                           | 6075            | 57      | 6235            | 89      | 6395            |
| 29                           | 6095            | 61      | 6255            | 93      | 6415            |

| UNII-6 (For Bandwidth=20 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 97                            | 6435            | 105     | 6475            | 113     | 6515            |
| 101                           | 6455            | 109     | 6495            | /       | /               |

| UNII-7 (For Bandwidth=20 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 117                           | 6535            | 141     | 6655            | 165     | 6775            |
| 121                           | 6555            | 145     | 6675            | 169     | 6795            |
| 125                           | 6575            | 149     | 6695            | 173     | 6815            |
| 129                           | 6595            | 153     | 6715            | 177     | 6835            |
| 133                           | 6615            | 157     | 6735            | 181     | 6855            |
| 137                           | 6635            | 161     | 6755            | 185     | 6875            |

| UNII-8 (For Bandwidth=20 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 189                           | 6895            | 205     | 6975            | 221     | 7055            |
| 193                           | 6915            | 209     | 6995            | 225     | 7075            |
| 197                           | 6935            | 213     | 7015            | 229     | 7095            |
| 201                           | 6955            | 217     | 7035            | /       | /               |

| UNII-5 (For Bandwidth=40MHz) |                 |         |                 |         |                 |
|------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 3                            | 5965            | 35      | 6125            | 67      | 6285            |
| 11                           | 6005            | 43      | 6165            | 75      | 6325            |
| 19                           | 6045            | 51      | 6205            | 83      | 6365            |
| 27                           | 6085            | 59      | 6245            | 91      | 6405            |

| UNII-6 (For Bandwidth=40 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 99                            | 6445            | 107     | 6485            | /       | /               |

| UNII-7 (For Bandwidth=40 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 115                           | 6525            | 139     | 6645            | 163     | 6765            |
| 123                           | 6605            | 147     | 6685            | 171     | 6805            |
| 131                           | 6645            | 155     | 6725            | 179     | 6845            |

| UNII-8 (For Bandwidth=40 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 187                           | 6885            | 203     | 6965            | 219     | 7045            |
| 195                           | 6925            | 211     | 7005            | 227     | 7085            |

| UNII-5 (For Bandwidth=80MHz) |                 |         |                 |         |                 |
|------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 7                            | 5985            | 39      | 6145            | 71      | 6305            |
| 23                           | 6065            | 55      | 6225            | 87      | 6385            |

| UNII-6 (For Bandwidth=80 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 103                           | 6465            | /       | /               | /       | /               |

| UNII-7 (For Bandwidth=80 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 119                           | 6545            | 151     | 6705            | 183     | 6865            |
| 135                           | 6625            | 167     | 6785            | /       | /               |

| UNII-8 (For Bandwidth=80 MHz) |                 |         |                 |         |                 |
|-------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                       | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 199                           | 6945            | 215     | 7025            | /       | /               |

| UNII-5 (For Bandwidth=160 MHz) |                 |         |                 |         |                 |
|--------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                        | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 47                             | 6185            | 79      | 6345            | /       | /               |

| UNII-6 (For Bandwidth=160 MHz) |                 |         |                 |         |                 |
|--------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                        | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 111                            | 6505            | /       | /               | /       | /               |

| UNII-7 (For Bandwidth=160 MHz) |                 |         |                 |         |                 |
|--------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                        | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 143                            | 6665            | 175     | 6825            | /       | /               |

| UNII-8 (For Bandwidth=160 MHz) |                 |         |                 |         |                 |
|--------------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                        | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 207                            | 6985            | /       | /               | /       | /               |

### 5.3. MAXIMUM POWER

For Indoor Client:

| IEEE Std. 802.11 | Frequency (MHz) | Maximum Average Conducted Power (dBm) | Maximum Average EIRP (dBm) |
|------------------|-----------------|---------------------------------------|----------------------------|
| a                | 5.925-7.125     | 8.44                                  | 9.14                       |
| ax HE20          |                 | 10.14                                 | 10.84                      |
| ax HE40          |                 | 11.52                                 | 12.22                      |
| ax HE80          |                 | 13.67                                 | 14.37                      |
| ax HE160         |                 | 16.73                                 | 17.43                      |

For Standard Power Client:

| IEEE Std. 802.11 | Frequency (MHz)            | Maximum Average Conducted Power (dBm) | Maximum Average EIRP (dBm) |
|------------------|----------------------------|---------------------------------------|----------------------------|
| a                | 5.925-6.425<br>6.525-6.875 | 16.27                                 | 16.97                      |
| ax HE20          |                            | 17.06                                 | 17.76                      |
| ax HE40          |                            | 16.65                                 | 17.35                      |
| ax HE80          |                            | 16.68                                 | 17.38                      |
| ax HE160         |                            | 16.75                                 | 17.45                      |

### 5.4. TEST CHANNEL CONFIGURATION

| UNII-5 Test Channel Configuration |                                                             |                              |
|-----------------------------------|-------------------------------------------------------------|------------------------------|
| IEEE Std.                         | Test Channel Number                                         | Frequency                    |
| 802.11a                           | CH 1(Low Channel), CH 45(MID Channel), CH 93(High Channel)  | 5955 MHz, 6175 MHz, 6415 MHz |
| 802.11ax HE20                     | CH 1(Low Channel), CH 45(MID Channel), CH 93(High Channel)  | 5955 MHz, 6175 MHz, 6415 MHz |
| 802.11ax HE40                     | CH 3(Low Channel), CH 43(MID Channel), CH 91(High Channel)  | 5965 MHz, 6165 MHz, 6405 MHz |
| 802.11ax HE80                     | CH 7(Low Channel), CH 39(MID Channel), CH 87(High Channel)  | 5985 MHz, 6145 MHz, 6385 MHz |
| 802.11ax HE160                    | CH 15(Low Channel), CH 47(Low Channel), CH 79(High Channel) | 6025 MHz, 6185 MHz, 6345 MHz |

| UNII-6 Test Channel Configuration |                                                               |                              |
|-----------------------------------|---------------------------------------------------------------|------------------------------|
| IEEE Std.                         | Test Channel Number                                           | Frequency                    |
| 802.11a                           | CH 97(Low Channel), CH 105(MID Channel), CH 113(High Channel) | 6435 MHz, 6475 MHz, 6515 MHz |
| 802.11ax HE20                     | CH 97(Low Channel), CH 105(MID Channel), CH 113(High Channel) | 6435 MHz, 6475 MHz, 6515 MHz |
| 802.11ax HE40                     | CH 99(Low Channel), CH 107(MID Channel), CH 115(High Channel) | 6445 MHz, 6485 MHz, 6525 MHz |
| 802.11ax HE80                     | CH 103(Low Channel)                                           | 6465 MHz                     |
| 802.11ax HE160                    | CH 111(Low Channel)                                           | 6505 MHz                     |

| UNII-7 Test Channel Configuration |                                                                   |                                 |
|-----------------------------------|-------------------------------------------------------------------|---------------------------------|
| IEEE Std.                         | Test Channel Number                                               | Frequency                       |
| 802.11a                           | CH 117(Low Channel), CH 153(MID Channel),<br>CH 181(High Channel) | 6535 MHz, 6715 MHz,<br>6855 MHz |
| 802.11ax<br>HE20                  | CH 117(Low Channel), CH 153(MID Channel),<br>CH 181(High Channel) | 6535 MHz, 6715 MHz,<br>6855 MHz |
| 802.11ax<br>HE40                  | CH 123(Low Channel), CH 155(MID Channel),<br>CH 179(High Channel) | 6565 MHz, 6725 MHz,<br>6845 MHz |
| 802.11ax<br>HE80                  | CH 119(Low Channel), CH 151(MID Channel),<br>CH 167(High Channel) | 6545 MHz, 6705 MHz,<br>6785 MHz |
| 802.11ax<br>HE160                 | CH 143(Low Channel),<br>CH 175(High Channel)                      | 6665 MHz, 6825 MHz              |

| UNII-8 Test Channel Configuration |                                                                    |                                 |
|-----------------------------------|--------------------------------------------------------------------|---------------------------------|
| IEEE Std.                         | Test Channel Number                                                | Frequency                       |
| 802.11a                           | CH 185(Low Channel), CH 213(MID Channel),<br>CH 233 (High Channel) | 6875 MHz, 7015 MHz,<br>7115 MHz |
| 802.11ax<br>HE20                  | CH 185(Low Channel), CH 213(MID Channel),<br>CH 233 (High Channel) | 6875 MHz, 7015 MHz,<br>7115 MHz |
| 802.11ax<br>HE40                  | CH 187(Low Channel), CH 211(MID Channel),<br>CH 227(High Channel)  | 6885 MHz, 7005 MHz,<br>7085 MHz |
| 802.11ax<br>HE80                  | CH 183(Low Channel), CH 199(Low Channel),<br>CH 215(High Channel)  | 6865 MHz, 6945 MHz,<br>7025 MHz |
| 802.11ax<br>HE160                 | CH 207(Low Channel)                                                | 6985 MHz                        |

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

| The Worse Case Power Setting Parameter |      |
|----------------------------------------|------|
| Test Software                          | QRCT |

For Standard Power Client:

| Mode         | Freq(MHz) | RU size | RU Index | Tx power level(dBm) |
|--------------|-----------|---------|----------|---------------------|
|              |           |         |          | ANT0 & ANT1         |
| 802.11a      | 5955      | SU      | /        | default             |
|              | 6175      | SU      | /        | default             |
|              | 6415      | SU      | /        | default             |
|              | 6535      | SU      | /        | default             |
|              | 6715      | SU      | /        | default             |
|              | 6855      | SU      | /        | default             |
| 802.11AX 20M | 5955      | 26      | 0        | default             |
|              |           | 52      | 37       | default             |
|              |           | 106     | 53       | default             |
|              |           | SU      | /        | default             |
|              | 6175      | 26      | 4        | default             |
|              |           | 52      | 38       | default             |
|              |           | 106     | 53       | default             |
|              |           | SU      | /        | default             |
|              | 6415      | 26      | 8        | default             |
|              |           | 52      | 40       | default             |
|              |           | 106     | 54       | default             |
|              |           | SU      | /        | default             |
|              | 6535      | 26      | 0        | default             |
|              |           | 52      | 37       | default             |
|              |           | 106     | 53       | default             |
|              |           | SU      | /        | default             |
|              | 6715      | 26      | 4        | default             |
|              |           | 52      | 38       | default             |
|              |           | 106     | 53       | default             |
|              |           | SU      | /        | default             |
|              | 6855      | 26      | 8        | default             |
|              |           | 52      | 40       | default             |
|              |           | 106     | 54       | default             |
|              |           | SU      | /        | default             |
| 802.11AX 40M | 5965      | SU      | /        | default             |

|               |      |    |   |         |
|---------------|------|----|---|---------|
|               | 6165 | SU | / | default |
|               | 6405 | SU | / | default |
|               | 6565 | SU | / | default |
|               | 6725 | SU | / | default |
|               | 6845 | SU | / | default |
| 802.11AX 80M  | 5985 | SU | / | default |
|               | 6145 | SU | / | default |
|               | 6385 | SU | / | default |
|               | 6625 | SU | / | default |
|               | 6705 | SU | / | default |
|               | 6785 | SU | / | default |
| 802.11AX 160M | 6025 | SU | / | default |
|               | 6185 | SU | / | default |
|               | 6345 | SU | / | default |
|               | 6665 | SU | / | default |

For Indoor Client:

| Mode         | Freq(MHz) | RU size | RU Index | Tx power level dBm) |
|--------------|-----------|---------|----------|---------------------|
|              |           |         |          | ANT0 & ANT1         |
| 802.11a      | 5955      | SU      | /        | default             |
|              | 6175      | SU      | /        | default             |
|              | 6415      | SU      | /        | default             |
|              | 6435      | SU      | /        | default             |
|              | 6475      | SU      | /        | default             |
|              | 6515      | SU      | /        | default             |
|              | 6535      | SU      | /        | default             |
|              | 6715      | SU      | /        | default             |
|              | 6855      | SU      | /        | default             |
|              | 6875      | SU      | /        | default             |
|              | 7015      | SU      | /        | default             |
|              | 7115      | SU      | /        | default             |
| 802.11AX 20M | 5955      | 26      | 0        | default             |
|              |           | 52      | 37       | default             |
|              |           | 106     | 53       | default             |
|              |           | SU      | /        | default             |
|              | 6175      | 26      | 4        | default             |
|              |           | 52      | 38       | default             |
|              |           | 106     | 53       | default             |
|              |           | SU      | /        | default             |
|              | 6415      | 26      | 8        | default             |

|              |      |     |    |         |
|--------------|------|-----|----|---------|
|              |      | 52  | 40 | default |
|              |      | 106 | 54 | default |
|              |      | SU  | /  | default |
|              | 6435 | 26  | 0  | default |
|              |      | 52  | 37 | default |
|              |      | 106 | 53 | default |
|              |      | SU  | /  | default |
|              | 6475 | 26  | 4  | default |
|              |      | 52  | 38 | default |
|              |      | 106 | 53 | default |
|              |      | SU  | /  | default |
|              | 6515 | 26  | 8  | default |
|              |      | 52  | 40 | default |
|              |      | 106 | 54 | default |
|              |      | SU  | /  | default |
|              | 6535 | 26  | 0  | default |
|              |      | 52  | 37 | default |
|              |      | 106 | 53 | default |
|              |      | SU  | /  | default |
|              | 6715 | 26  | 4  | default |
|              |      | 52  | 38 | default |
|              |      | 106 | 53 | default |
|              |      | SU  | /  | default |
|              | 6855 | 26  | 8  | default |
|              |      | 52  | 40 | default |
|              |      | 106 | 54 | default |
|              |      | SU  | /  | default |
|              | 6875 | 26  | 0  | default |
|              |      | 52  | 37 | default |
|              |      | 106 | 53 | default |
|              |      | SU  | /  | default |
|              | 7015 | 26  | 4  | default |
|              |      | 52  | 38 | default |
|              |      | 106 | 53 | default |
|              |      | SU  | /  | default |
|              | 7115 | 26  | 8  | default |
|              |      | 52  | 40 | default |
|              |      | 106 | 54 | default |
|              |      | SU  | /  | default |
| 802.11AX 40M | 5965 | SU  | /  | default |
|              | 6165 | SU  | /  | default |

|               |      |    |   |         |
|---------------|------|----|---|---------|
|               | 6405 | SU | / | default |
|               | 6445 | SU | / | default |
|               | 6485 | SU | / | default |
|               | 6525 | SU | / | default |
|               | 6565 | SU | / | default |
|               | 6725 | SU | / | default |
|               | 6845 | SU | / | default |
|               | 6885 | SU | / | default |
|               | 7005 | SU | / | default |
|               | 7085 | SU | / | default |
| 802.11AX 80M  | 5985 | SU | / | default |
|               | 6145 | SU | / | default |
|               | 6385 | SU | / | default |
|               | 6465 | SU | / | default |
|               | 6545 | SU | / | default |
|               | 6705 | SU | / | default |
|               | 6785 | SU | / | default |
|               | 6865 | SU | / | default |
|               | 6945 | SU | / | default |
|               | 7025 | SU | / | default |
| 802.11AX 160M | 6025 | SU | / | default |
|               | 6185 | SU | / | default |
|               | 6345 | SU | / | default |
|               | 6505 | SU | / | default |
|               | 6665 | SU | / | default |
|               | 6825 | SU | / | default |
|               | 6985 | SU | / | default |

## 5.6. WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.6.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

802.11a 20 mode: 6 Mbps  
802.11n HT20 mode: MCS0  
802.11n HT40 mode: MCS0  
802.11ac VHT20 mode: MCS0  
802.11ac VHT40 mode: MCS0  
802.11ac VHT80 mode: MCS0  
802.11ac VHT160 mode: MCS0  
802.11ax HE20 mode: MCS0  
802.11ax HE40 mode: MCS0  
802.11ax HE80 mode: MCS0  
802.11ax HE160 mode: MCS0

All modes support MIMO mode.

SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas: antenna 0 and antenna 1, antenna 0 support BT and WIFI, antenna 1 support WIFI.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

802.11ax HE20/HE40/HE80/HE160 support Full RU, SU (Single User) and partial RU tone. According to Preliminary Investigation, Full RU and SU (Single User) have the same bandwidth and waveform performance, conducted power of Full RU modes are higher than SU (Single User) Tone modes. It was determined that Full RU modes were the worst case over SU Tone in every instance. Therefore, Full RU modes were tested to represent SU modes as the worst-case scenario.

Preliminary Investigation was performed for 802.11 ax modes were determined by the following:

Testing was performed 802.11ax HE20 26T, 52T, 106T & Full RU to cover HE40 26T, 52T, 106T and 242T.

Testing was performed 802.11ax HE20 26T, 52T, 106T, Full RU & HE40 Full RU to cover HE80 26T, 52T, 106T, 242T and 484T.

Testing was performed 802.11ax HE20 26T, 52T, 106T, Full RU, HE40 Full RU & HE80 Full RU to cover HE160 26T, 52T, 106T, 242T, 484T and 996T.

802.11ax HE20 26T Harmonics and Spurious Emissions were ran at maximum PSD between 26T, 52T, 104T, 242T and 484T modes across all bandwidths and bands to cover HE20 52T and 106, HE40 26T, 52T, 106T and 242T, HE80 26T, 52T, 106T, 242T and 484T, HE160 26T, 52T, 106T, 242T, 484T and 996T as worst-case PSD.

Full RU mode Harmonics and Spurious Emissions were ran at maximum power between 26T, 52T, 104T, 242T, 484T and Full RU modes across all bandwidths and bands to cover HE20 52T and 106, HE40 26T, 52T, 106T and 242T, HE80 26T, 52T, 106T, 242T and 484T, HE160 26T, 52T, 106T, 242T, 484T and 996T as worst-case power.

## 5.7. DESCRIPTION OF AVAILABLE ANTENNAS

| Antenna No. | Frequency Band | Antenna Type | Max Antenna Gain (dBi) |
|-------------|----------------|--------------|------------------------|
| 0           | 5925 ~ 7125    | FPC Antenna  | 0.6                    |
| 1           | 5925 ~ 7125    | FPC Antenna  | 0.8                    |

The EUT support Space Time Coding(STBC) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the STBC results the Directional Gain was calculated in accordance with the following mothed.

$$\text{Directional gain} = 10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/NANT] \text{ dBi}$$

$$\text{Directional gain} = 0.7 \text{ dBi}$$

| IEE Std. 802.11 | Transmit and Receive Mode                    | Description                                                    |
|-----------------|----------------------------------------------|----------------------------------------------------------------|
| 802.11a         | <input checked="" type="checkbox"/> 2TX, 2RX | ANT 0 and ANT 1 can be used as transmitting/receiving antenna. |
| 802.11ax HE20   | <input checked="" type="checkbox"/> 2TX, 2RX | ANT 0 and ANT 1 can be used as transmitting/receiving antenna. |
| 802.11ax HE40   | <input checked="" type="checkbox"/> 2TX, 2RX | ANT 0 and ANT 1 can be used as transmitting/receiving antenna. |
| 802.11ax HE80   | <input checked="" type="checkbox"/> 2TX, 2RX | ANT 0 and ANT 1 can be used as transmitting/receiving antenna. |
| 802.11ax HE160  | <input checked="" type="checkbox"/> 2TX, 2RX | ANT 0 and ANT 1 can be used as transmitting/receiving antenna. |

Note: Only BT&WLAN 2.4G, BT & WLAN 5G, BT & WLAN 6G can transmit simultaneously.  
(declared by manufacturer)

## 5.8. SUPPORT UNITS FOR SYSTEM TEST

### SUPPORT EQUIPMENT

| Item | Equipment  | Brand Name | Model Name | Remark                                                         |
|------|------------|------------|------------|----------------------------------------------------------------|
| 1    | PC         | Lenovo     | E14        | /                                                              |
| 2    | AC Adaptor | /          | 2ACP0183C  | Input: AC 100-240V,<br>0.5A, 50-60Hz<br>Output: DC 5V, 3A, 15W |

### I/O CABLES

| Cable No | Port | Connector Type | Cable Type | Cable Length(m) | Remarks |
|----------|------|----------------|------------|-----------------|---------|
| 1        | USB  | /              | /          | 1.5             | /       |

### ACCESSORIES


| Item | Accessory | Brand Name | Model Name | Description |
|------|-----------|------------|------------|-------------|
| /    | /         | /          | /          | /           |

### TEST SETUP


The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

For others:

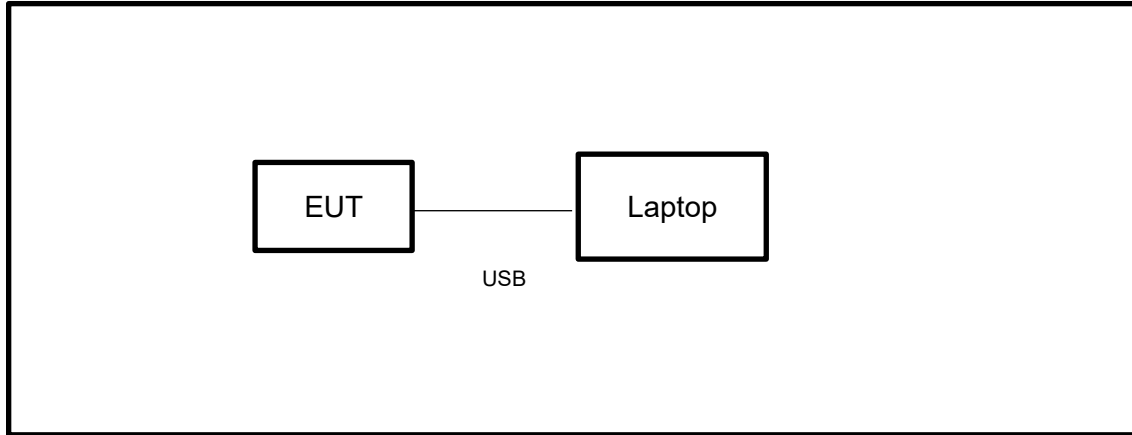

For AC Power Line Conducted Emission:

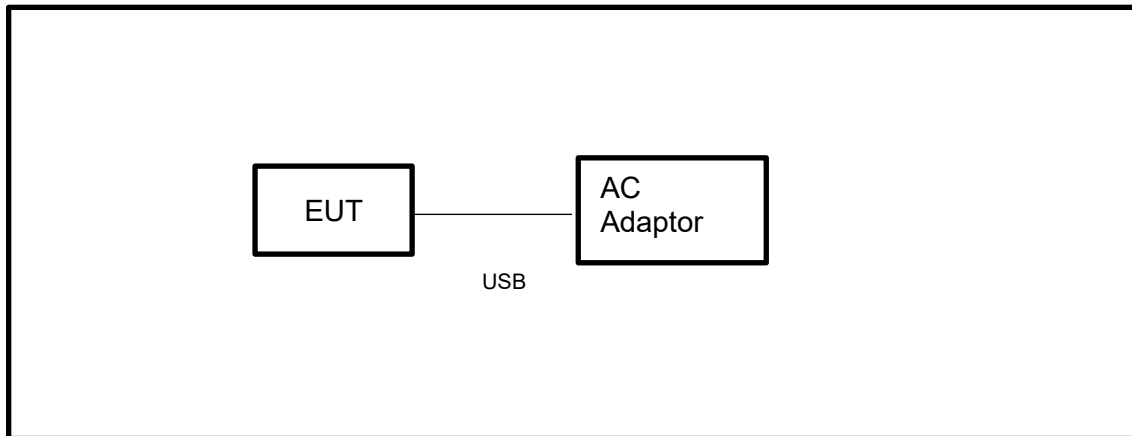

## 6. MEASURING EQUIPMENT AND SOFTWARE USED

| R&S TS 8997 Test System        |                 |                         |                        |                 |              |              |
|--------------------------------|-----------------|-------------------------|------------------------|-----------------|--------------|--------------|
| Equipment                      | Manufacturer    | Model No.               | Serial No.             | Upper Last Cal. | Last Cal.    | Due. Date    |
| Power sensor, Power Meter      | R&S             | OSP120                  | 100921                 | /               | Dec.27,2024  | Dec.26,2025  |
| Vector Signal Generator        | R&S             | SMBV100A                | 261637                 | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Signal Generator               | R&S             | SMB100A                 | 178553                 | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Signal Analyzer                | R&S             | FSV40                   | 101118                 | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Software                       |                 |                         |                        |                 |              |              |
| Description                    | Manufacturer    |                         | Name                   |                 | Version      |              |
| For R&S TS 8997 Test System    | Rohde & Schwarz |                         | EMC 32                 |                 | 10.60.10     |              |
| Tonsend RF Test System         |                 |                         |                        |                 |              |              |
| Equipment                      | Manufacturer    | Model No.               | Serial No.             | Upper Last Cal. | Last Cal.    | Due. Date    |
| Wireless Connectivity Tester   | R&S             | CMW270                  | 1201.0002K75-102529-FJ | Sep.13, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| PXA Signal Analyzer            | Keysight        | N9030A                  | MY55410512             | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| MXG Vector Signal Generator    | Keysight        | N5182B                  | MY56200284             | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| MXG Vector Signal Generator    | Keysight        | N5172B                  | MY56200301             | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Temperature & Humidity Chamber | SANMOOD         | SG-80-CC-2              | 2088                   | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Attenuator                     | Aglient         | 8495B                   | 2814a12853             | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| RF Control Unit                | Tonscend        | JS0806-2                | 23B80620666            | /               | Dec.27,2024  | Dec.26,2025  |
| Software                       |                 |                         |                        |                 |              |              |
| Description                    | Manufacturer    | Name                    |                        |                 | Version      |              |
| Tonsend SRD Test System        | Tonsend         | JS1120-3 RF Test System |                        |                 | V3.2.22      |              |

| Conducted Emissions                   |              |           |              |                 |              |              |
|---------------------------------------|--------------|-----------|--------------|-----------------|--------------|--------------|
| Equipment                             | Manufacturer | Model No. | Serial No.   | Upper Last Cal. | Last Cal.    | Due Date     |
| EMI Test Receiver                     | R&S          | ESR3      | 101961       | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Two-Line V-Network                    | R&S          | ENV216    | 101983       | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Artificial Mains Networks             | Schwarzbeck  | NSLK 8126 | 8126465      | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |
| Software                              |              |           |              |                 |              |              |
| Description                           |              |           | Manufacturer | Name            | Version      |              |
| Test Software for Conducted Emissions |              |           | Farad        | EZ-EMC          | Ver. UL-3A1  |              |

| Radiated Emissions           |              |              |               |                 |               |              |
|------------------------------|--------------|--------------|---------------|-----------------|---------------|--------------|
| Equipment                    | Manufacturer | Model No.    | Serial No.    | Upper Last Cal. | Last Cal.     | Due Date     |
| MXE EMI Receiver             | KESIGHT      | N9038A       | MY56400036    | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Hybrid Log Periodic Antenna  | TDK          | HLP-3003C    | 130960        | /               | June 28, 2024 | June.27 2027 |
| Preamplifier                 | HP           | 8447D        | 2944A09099    | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| EMI Measurement Receiver     | R&S          | ESR26        | 101377        | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Horn Antenna                 | TDK          | HRN-0118     | 130940        | /               | Dec.10, 2024  | Dec.11, 2027 |
| Preamplifier                 | TDK          | PA-02-0118   | TRS-305-00067 | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Horn Antenna                 | Schwarzbeck  | BBHA9170     | 697           | /               | Jun 30, 2024  | Jun 29, 2027 |
| Preamplifier                 | TDK          | PA-02-2      | TRS-307-00003 | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Preamplifier                 | TDK          | PA-02-3      | TRS-308-00002 | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Loop antenna                 | Schwarzbeck  | 1519B        | 00008         | /               | Dec.09, 2024  | Dec.08, 2027 |
| Highpass Filter              | Xingbo       | XBLBQ-GTA68  | 211115-2-1    | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Notch Filter (5905-6445 MHz) | Xingbo       | XBLBQ-DZA175 | 210922-2-1    | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Notch Filter (6425-6525 MHz) | Xingbo       | XBLBQ-DZA176 | 210922-2-2    | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |
| Notch Filter                 | Xingbo       | XBLBQ-DZA177 | 210922-2-3    | Sep.28, 2024    | Sep.12, 2025  | Sep.11, 2026 |

|                                      |        |              |              |              |              |              |
|--------------------------------------|--------|--------------|--------------|--------------|--------------|--------------|
| (6825-7125 MHz)                      |        |              |              |              |              |              |
| Notch Filter (6525-6875 MHz)         | Xingbo | XBLBQ-DZA178 | 210922-2-4   | Sep.28, 2024 | Sep.12, 2025 | Sep.11, 2026 |
| Software                             |        |              |              |              |              |              |
| Description                          |        |              | Manufacturer | Name         | Version      |              |
| Test Software for Radiated Emissions |        |              | Farad        | EZ-EMC       | Ver. UL-3A1  |              |

| Other Instrument           |              |           |            |                 |              |              |
|----------------------------|--------------|-----------|------------|-----------------|--------------|--------------|
| Equipment                  | Manufacturer | Model No. | Serial No. | Upper Last Cal. | Last Cal.    | Due Date     |
| Temperature humidity probe | OMEGA        | ITHX-SD-5 | 18470007   | Oct.8, 2024     | Sep.16, 2025 | Sep.15, 2026 |
| Barometer                  | Yiyi         | Baro      | N/A        | Oct.10, 2024    | Sep.19, 2025 | Sep.18, 2026 |
| Attenuator                 | Agilent      | 8495B     | 2814a12853 | Sep.28, 2024    | Sep.12, 2025 | Sep.11, 2026 |

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

#### LIMITS


None; for reporting purposes only.

#### TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW  $\geq$  EBW if possible; otherwise, set RBW to the largest available value. Set VBW  $\geq$  RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### TEST SETUP



#### TEST ENVIRONMENT

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.3°C | Relative Humidity | 55%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

#### TEST DATE / ENGINEER

|           |              |         |             |
|-----------|--------------|---------|-------------|
| Test Date | July 8, 2025 | Test By | Bairong Liu |
|-----------|--------------|---------|-------------|

#### TEST RESULTS

Please refer to section "Test Data" - Appendix B

## 7.2. 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

| CFR 47 FCC Part15, Subpart E |                                                                                                  |                       |
|------------------------------|--------------------------------------------------------------------------------------------------|-----------------------|
| Test Item                    | Limit                                                                                            | Frequency Range (MHz) |
| 26 dB Emission Bandwidth     | The 26 dB bandwidth of the devices shall not exceed 320 MHz for all channels except the 320 MHz. | 5.925-7.125 GHz       |

| ISED RSS-248 ISSUE 3    |                                                                |                       |
|-------------------------|----------------------------------------------------------------|-----------------------|
| Test Item               | Limit                                                          | Frequency Range (MHz) |
| 99 % Occupied Bandwidth | The occupied bandwidth of the device shall not exceed 320 MHz. | 5.925-7.125 GHz       |

### TEST PROCEDURE


Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

|                  |                                                                                                                                 |
|------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Center Frequency | The center frequency of the channel under test                                                                                  |
| Detector         | Peak                                                                                                                            |
| RBW              | For 26 dB Emission bandwidth: approximately 1 % of the EBW.<br>For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW. |
| VBW              | For 26 dB Bandwidth: >3*RBW<br>For 99 % Bandwidth: >3*RBW                                                                       |
| Trace            | Max hold                                                                                                                        |
| Sweep            | Auto couple                                                                                                                     |

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP



**TEST ENVIRONMENT**

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.3°C | Relative Humidity | 55%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

**TEST DATE / ENGINEER**

|           |              |         |             |
|-----------|--------------|---------|-------------|
| Test Date | July 8, 2025 | Test By | Bairong Liu |
|-----------|--------------|---------|-------------|

**TEST RESULTS**

Please refer to section "Test Data" - Appendix A1&A2

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS

| CFR 47 FCC Part15, Subpart E |                                                                                                                                                                                                                                                                                                                                             |                                    |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Test Item                    | Limit                                                                                                                                                                                                                                                                                                                                       | Frequency Range (MHz)              |
| Conducted Output Power       | <input type="checkbox"/> Standard Power Access Point<br>The maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).                                                   | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                              | <input type="checkbox"/> Indoor Access Point<br>The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.                                                                                                                                                                                                           | 5.925-7.125 GHz                    |
|                              | <input type="checkbox"/> Subordinate Device<br>The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.                                                                                                                                                                                                            | 5.925-7.125 GHz                    |
|                              | <input checked="" type="checkbox"/> Client Devices, Operating under the control of a Standard Power Access Point<br>The maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power. | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                              | <input checked="" type="checkbox"/> Client Devices, Operating under the control of an Indoor Access Point<br>The maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.                                                                                                                                              | 5.925-7.125 GHz                    |

| ISED RSS-248 ISSUE 3   |                                                                                                                                                                                                                                                                                                                                                                |                                    |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Test Item              | Limit                                                                                                                                                                                                                                                                                                                                                          | Frequency Range (MHz)              |
| Conducted Output Power | <input type="checkbox"/> Standard Power Access Point<br>The maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 36 dBm and the maximum e.i.r.p. for a device not enclosed by walls and a ceiling, measured at any elevation angle greater than 30 degrees above the horizon, shall not exceed 21 dBm over the 5925-6875 MHz frequency band | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                        | <input type="checkbox"/> Low-Power Indoor Access-Points<br>The maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 30 dBm                                                                                                                                                                                                                  | 5.925-7.125 GHz                    |
|                        | <input type="checkbox"/> Subordinate Device<br>The maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 30 dBm                                                                                                                                                                                                                              | 5.925-7.125 GHz                    |
|                        | <input checked="" type="checkbox"/> Standard Client Devices<br>The maximum e.i.r.p. over the 5925-6875 MHz frequency band shall not exceed 30 dBm and the maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point                                                                     | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                        | <input checked="" type="checkbox"/> Low-Power Client Devices<br>The maximum e.i.r.p. over the 5925-7125 MHz frequency band shall not exceed 24 dBm                                                                                                                                                                                                             | 5.925-7.125 GHz                    |

## TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

### Method PM (Measurement using an RF average power meter):

(i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:


- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
- At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.

c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(ii) If the transmitter does not transmit continuously, measure the duty cycle,  $x$ , of the transmitter output signal as described in II.B.

(iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(iv) Adjust the measurement in dBm by adding  $10 \log (1/x)$  where  $x$  is the duty cycle (e.g.,  $10 \log (1/0.25)$  if the duty cycle is 25 %).

**TEST SETUP****TEST ENVIRONMENT**

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.3°C | Relative Humidity | 55%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

**TEST DATE / ENGINEER**

|           |              |         |             |
|-----------|--------------|---------|-------------|
| Test Date | July 8, 2025 | Test By | Bairong Liu |
|-----------|--------------|---------|-------------|

**TEST RESULTS**

Please refer to section "Test Data" - Appendix C

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

| CFR 47 FCC Part15, Subpart E |                                                                                                                                                                                                                 |                                    |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Test Item                    | Limit                                                                                                                                                                                                           | Frequency Range (MHz)              |
| Conducted Output Power       | <input type="checkbox"/> Standard Power Access Point<br>The maximum power spectral density must not exceed 23 dBm e.i.r.p. in any 1-megahertz band.                                                             | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                              | <input type="checkbox"/> Indoor Access Point<br>The maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.                                                                      | 5.925-7.125 GHz                    |
|                              | <input type="checkbox"/> Subordinate Device<br>The maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band.                                                                       | 5.925-7.125 GHz                    |
|                              | <input checked="" type="checkbox"/> Client Devices, Operating under the control of a Standard Power Access Point<br>The maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band. | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                              | <input checked="" type="checkbox"/> Client Devices, Operating Under The Control Of An Indoor Access Point<br>The maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.        | 5.925-7.125 GHz                    |

| ISED RSS-248 ISSUE 3   |                                                                                                                                   |                                    |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Test Item              | Limit                                                                                                                             | Frequency Range (MHz)              |
| Conducted Output Power | <input type="checkbox"/> Standard Power Access Point<br>The maximum e.i.r.p. spectral density shall not exceed 23 dBm/MHz         | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                        | <input type="checkbox"/> Low-Power Indoor Access-Points<br>The maximum e.i.r.p. spectral density shall not exceed 5 dBm/MHz       | 5.925-7.125 GHz                    |
|                        | <input type="checkbox"/> Subordinate Device<br>The maximum e.i.r.p. spectral density shall not exceed 5 dBm/MHz                   | 5.925-7.125 GHz                    |
|                        | <input checked="" type="checkbox"/> Standard Client Devices<br>The maximum e.i.r.p. spectral density shall not exceed 17 dBm/MHz  | 5.925-6.425 GHz<br>6.525-6.875 GHz |
|                        | <input checked="" type="checkbox"/> Low-Power Client Devices<br>The maximum e.i.r.p. spectral density shall not exceed -1 dBm/MHz | 5.925-7.125 GHz                    |

## TEST PROCEDURE


Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

|                  |                                                              |
|------------------|--------------------------------------------------------------|
| Center Frequency | The center frequency of the channel under test               |
| Detector         | RMS                                                          |
| RBW              | 1 MHz                                                        |
| VBW              | $\geq 3 \times \text{RBW}$                                   |
| Span             | Encompass the entire emissions bandwidth (EBW) of the signal |
| Trace            | Average                                                      |
| Sweep time       | Auto                                                         |

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz reference bandwidth.

**TEST SETUP****TEST ENVIRONMENT**

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.3℃  | Relative Humidity | 55%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

**TEST DATE / ENGINEER**

|           |              |         |             |
|-----------|--------------|---------|-------------|
| Test Date | July 8, 2025 | Test By | Bairong Liu |
|-----------|--------------|---------|-------------|

**TEST RESULTS**

Please refer to section "Test Data" - Appendix D

## 7.5. IN-BAND EMISSIONS (MASK)

### LIMITS

Please refer to CFR 47 FCC §15.407 (b) (7) and RSS-248 Issue 3, Clause 4.2 (b)

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

### TEST PROCEDURE

Refer to 987594 D02 U-NII 6GHz EMC Measurement v01r01 J.

Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.

2. Set the reference level of the measuring equipment in accordance with procedure 4.1.6.2 of ANSI C63.10-2020.

3. Measure the 26 dB EBW using the test procedure 12.5.2 of ANSI C63.10-2020. (This will be used to determine the channel edge.)

4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:

a) Set the span to encompass the entire 26 dB EBW of the signal.

b) Set RBW = same RBW used for 26 dB EBW measurement.

c) Set VBW  $\geq 3 \times$  RBW

d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .

e) Sweep time = auto.

f) Detector = RMS (i.e., power averaging)

g) Trace average at least 100 traces in power averaging (rms) mode.

h) Use the peak search function on the instrument to find the peak of the spectrum.

5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.

6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:

a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

b. Suppressed by 28 dB at one channel bandwidth from the channel center.


c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

7. Adjust the span to encompass the entire mask as necessary.

8. Clear trace.

9. Trace average at least 100 traces in power averaging (rms) mode.

10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

**TEST SETUP****TEST ENVIRONMENT**

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.6℃  | Relative Humidity | 58%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

**TEST DATE / ENGINEER**

|           |               |         |             |
|-----------|---------------|---------|-------------|
| Test Date | July 11, 2025 | Test By | Bairong Liu |
|-----------|---------------|---------|-------------|

**TEST RESULTS**

Please refer to section "Test Data" - Appendix E

## 7.6. FREQUENCY STABILITY

### LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

### TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -10 °C ~ 50 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:

|                  |                                                              |
|------------------|--------------------------------------------------------------|
| Center Frequency | The center frequency of the channel under test               |
| Detector         | Peak                                                         |
| RBW              | 10 kHz                                                       |
| VBW              | $\geq 3 \times \text{RBW}$                                   |
| Span             | Encompass the entire emissions bandwidth (EBW) of the signal |
| Trace            | Max hold                                                     |
| Sweep time       | Auto                                                         |


4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

### TEST ENVIRONMENT

|                      | Normal Test Conditions                          | Extreme Test Conditions                  |
|----------------------|-------------------------------------------------|------------------------------------------|
| Relative Humidity    | 20 % ~ 75 %                                     | /                                        |
| Atmospheric Pressure | 100 kPa ~ 102 kPa                               | /                                        |
| Temperature          | T <sub>N</sub> (Normal Temperature):<br>25.1 °C | T <sub>L</sub> (Low Temperature): -10 °C |
|                      |                                                 | T <sub>H</sub> (High Temperature): 50 °C |
| Supply Voltage       | V <sub>N</sub> (Normal Voltage): DC 3.635 V     | V <sub>L</sub> (Low Voltage): DC 3.2 V   |
|                      |                                                 | V <sub>H</sub> (High Voltage): DC 4.2 V  |

Note: The manufacturer declares that the device operates at DC 3.2V~DC 4.2V.

### TEST SETUP

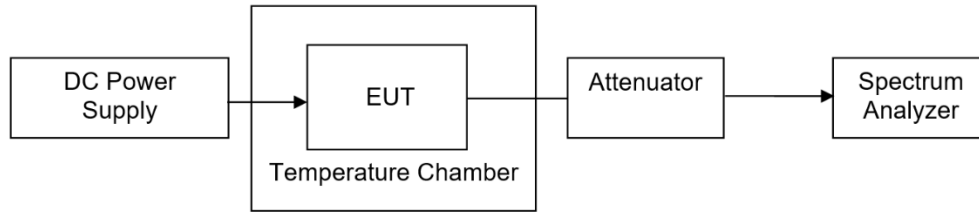

### TEST ENVIRONMENT

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.3°C | Relative Humidity | 55%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

### TEST DATE / ENGINEER

|           |              |         |             |
|-----------|--------------|---------|-------------|
| Test Date | July 8, 2025 | Test By | Bairong Liu |
|-----------|--------------|---------|-------------|

### TEST RESULTS

Please refer to section "Test Data" - Appendix I

## 7.7. CONTENTION-BASED PROTOCOL

### LIMITS

Please refer to CFR 47 FCC §15.407 (d) (6) and RSS-248 Issue 3 Clause 4.7

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)<sup>1</sup>. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.


To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

#### a) Simulating Incumbent Signal

The incumbent signal is assumed to be noise-like. One example of such transmission could be Digital Video Broadcasting (DVB) systems that use Orthogonal Frequency Division Multiplexing (OFDM). Incumbent systems may also use different bandwidths for their transmissions. A 10 MHz-wide additive white Gaussian noise (AWGN) signal is selected to simulate and represent incumbent transmission.

#### b) Required number of tests

Incumbent and EUT (access point, subordinate or client) signals may occupy different portions of the channel. Depending on the EUT transmission bandwidth and incumbent signal center frequency (simulated by a 10 MHz-wide AWGN signal), the center frequency of the EUT signal  $f_{fcc1}$  may fall within the incumbent's occupied bandwidth (Figure 1.a), or outside of it (Figure 1.b).

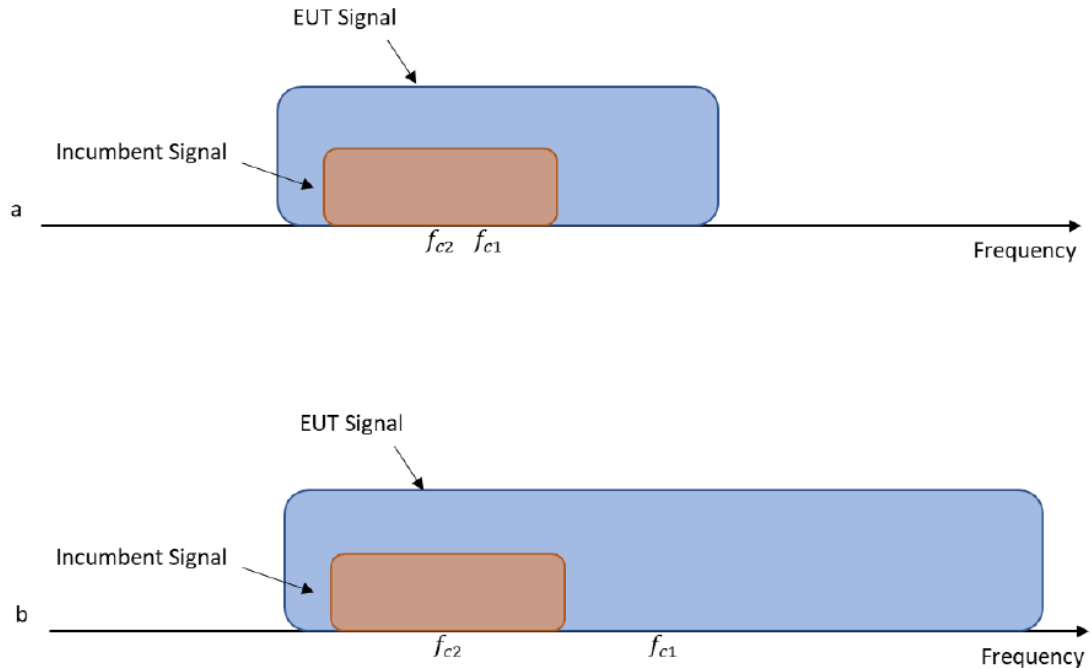

**Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it**

To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency  $f_{cc2}$ ) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed;

**Table 1. Criteria to determine number of times detection threshold test may be performed**

| If                                    | Number of Tests                                              | Placement of Incumbent Transmission                                                                                                                                                          |
|---------------------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $BW_{EUT} \leq BW_{Inc}$              | Once                                                         | Tune incumbent and EUT transmissions ( $f_{c1} = f_{c2}$ )                                                                                                                                   |
| $BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$  | Once                                                         | Incumbent transmission is contained within $BW_{EUT}$                                                                                                                                        |
| $2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$ | Twice. Incumbent transmission is contained within $BW_{EUT}$ | Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel                                                                  |
| $BW_{EUT} > 4BW_{Inc}$                | Three times                                                  | Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel |

where:

$BW_{EUT}$ : Transmission bandwidth of EUT signal

$BW_{Inc}$ : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

$f_{c1}$ : Center frequency of EUT transmission


$f_{c2}$ : Center frequency of simulated incumbent signal

## **TEST PROCEDURE**

To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle.<sup>2</sup> To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer 2 to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

## TEST SETUP

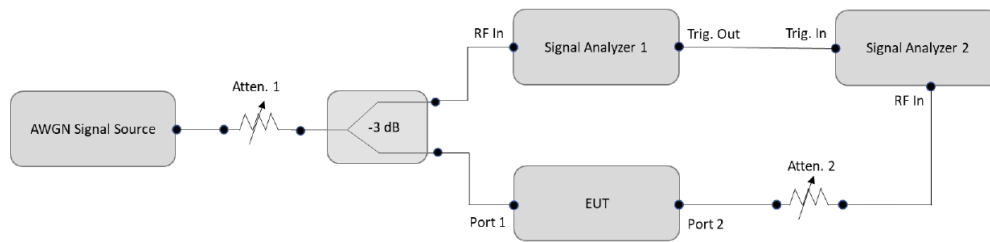

## TEST ENVIRONMENT

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.9°C | Relative Humidity | 56%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

## TEST DATE / ENGINEER

|           |                |         |             |
|-----------|----------------|---------|-------------|
| Test Date | August 6, 2025 | Test By | Bairong Liu |
|-----------|----------------|---------|-------------|

## TEST RESULTS

Please refer to section "Test Data" - Appendix F

## 7.8. DUAL CLIENT TEST, DEMONSTRATION OF PROPER POWER ADJUSTMENT BASED ON ASSOCIATED AP

### LIMITS

| Device Type           | Support Band    | Maximum e.i.r.p Limit |
|-----------------------|-----------------|-----------------------|
| Indoor Client         | UNII 5, 6, 7, 8 | < 24 dBm              |
| Standard Power Client | UNII 5, 7       | < 30 dBm              |

### TEST PROCEDURE

1. Connect equipment as shown in Figure 6 below.
2. Adjust Atten 2 to Standard Power AP to facilitate error-free communication with the Client (Atten 1 should be set to High on the RF path to the Low Power AP).
3. Configure the Client and APs to associate and send data (stream data). The client must be configured to transmit at its highest power level. Initially, because the attenuation on Atten 1 is set high, the Client will only associate with the Std Power AP.
4. Verify transmission between the Client and the Standard Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices.
5. Gradually increase Atten 2 while decreasing Atten 1. This simulates the Client moving from outdoors to indoors. At some level of attenuation, the Client should associate with the Low-Power indoor AP. Verify transmission between the Client and the Low-Power AP.
6. Measure the RF power of the Client device using the same method as in step 4. Verify the power is no more than 24 dBm EIRP.

### TEST SETUP

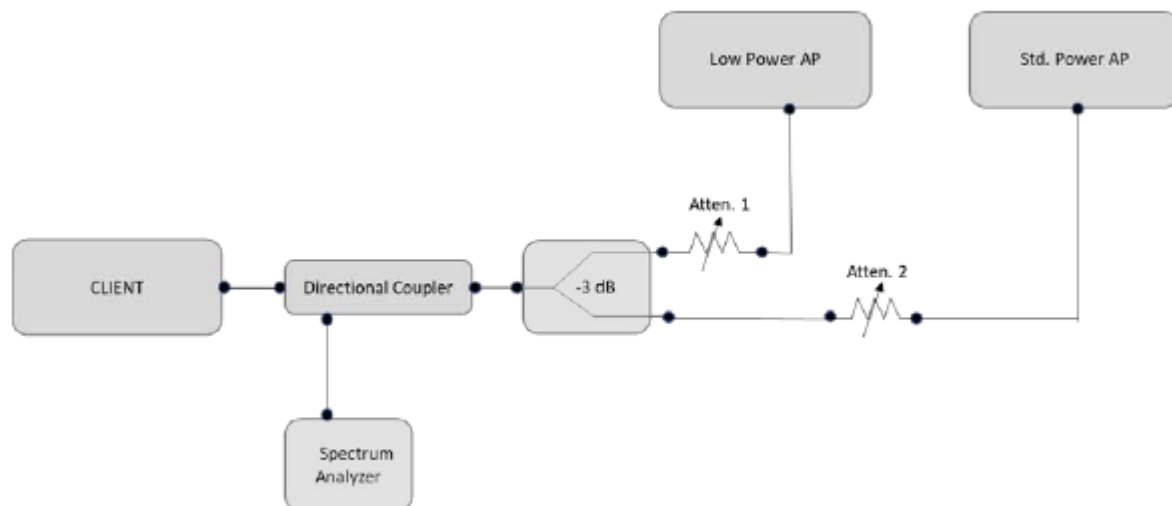


Figure 6. Test setup for conducted testing

**TEST ENVIRONMENT**

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 24.1℃  | Relative Humidity | 53%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

**TEST DATE / ENGINEER**

|           |                |         |             |
|-----------|----------------|---------|-------------|
| Test Date | August 2, 2025 | Test By | Bairong Liu |
|-----------|----------------|---------|-------------|

**TEST RESULTS**

Please refer to section "Test Data" - Appendix G

## 7.9. PROPER POWER ADJUSTMENT, CLIENT DEVICES CONNECTED TO A STANDARD POWER ACCESS POINT (APC)


### LIMITS

A client device that connects to a Standard Power AP must limit its power to a minimum of 6 dB lower than its associated Standard Power access point's authorized transmit power. The term "authorized" means the AFC-approved power level for the AP to use on a particular channel.

### TEST PROCEDURE

1. Connect equipment as shown in Figure 7 below.
2. In the figure, the Std Power AP can be configured using a developmental board, an Access Point incorporated with test software, or any other hardware configuration that adequately demonstrates proper client power adjustment.
3. Adjust Atten 1 to Std Power AP to facilitate error-free communication with the Client but protect the Client receiver from overload or damage.
4. Configure the Client and AP to associate and send data (stream data). The AP should be configured so its registered power is 36 dBm EIRP.
5. Verify transmission between the Client and the Standard Power AP. Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices. Use this power and its antenna gain to calculate the Client EIRP.
6. The Client EIRP should be minimally 6 dB lower than the APs.
7. Repeat Steps 2 through 5 at two other selected measurement points—the first at the midpoint and the second at the client's lowest rated power, as declared by the manufacturer.

### TEST SETUP

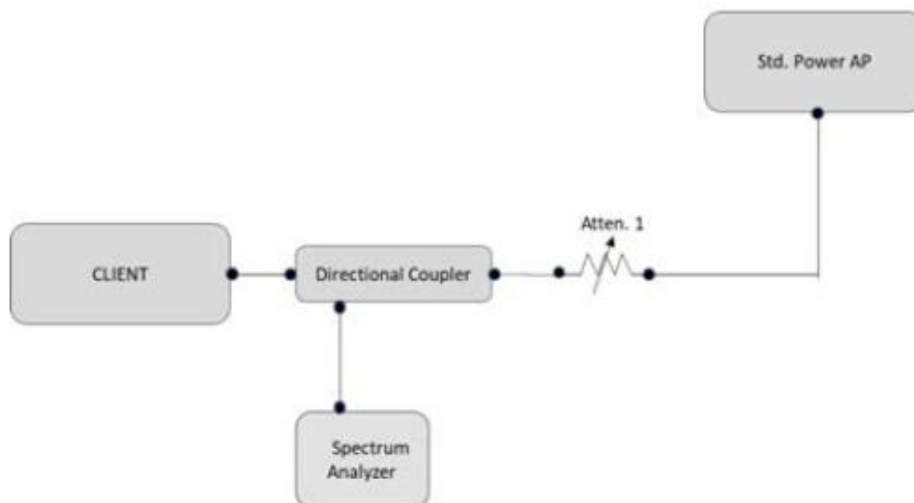

**Figure 7. Test setup for conducted testing**

**TEST ENVIRONMENT**

|                     |        |                   |           |
|---------------------|--------|-------------------|-----------|
| Temperature         | 23.2°C | Relative Humidity | 51%       |
| Atmosphere Pressure | 101kPa | Test Voltage      | DC 3.635V |

**TEST DATE / ENGINEER**

|           |                  |         |             |
|-----------|------------------|---------|-------------|
| Test Date | October 22, 2025 | Test By | Bairong Liu |
|-----------|------------------|---------|-------------|

**TEST RESULTS**

Please refer to section "Test Data" - Appendix H

## 8. RADIATED TEST RESULTS

### LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b) (6).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-248 4.6.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

| Emissions radiated outside of the specified frequency bands above 30 MHz |                                    |                                      |         |
|--------------------------------------------------------------------------|------------------------------------|--------------------------------------|---------|
| Frequency Range (MHz)                                                    | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |         |
|                                                                          |                                    | Quasi-Peak                           |         |
| 30 - 88                                                                  | 100                                | 40                                   |         |
| 88 - 216                                                                 | 150                                | 43.5                                 |         |
| 216 - 960                                                                | 200                                | 46                                   |         |
| Above 960                                                                | 500                                | 54                                   |         |
| Above 1000                                                               | 500                                | Peak                                 | Average |
|                                                                          |                                    | 74                                   | 54      |

| FCC Emissions radiated outside of the specified frequency bands below 30 MHz |                                   |                               |
|------------------------------------------------------------------------------|-----------------------------------|-------------------------------|
| Frequency (MHz)                                                              | Field strength (microvolts/meter) | Measurement distance (meters) |
| 0.009-0.490                                                                  | 2400/F(kHz)                       | 300                           |
| 0.490-1.705                                                                  | 24000/F(kHz)                      | 30                            |
| 1.705-30.0                                                                   | 30                                | 30                            |

ISED General field strength limits at frequencies below 30 MHz

| Table 6 – General field strength limits at frequencies below 30 MHz |                                          |                          |
|---------------------------------------------------------------------|------------------------------------------|--------------------------|
| Frequency                                                           | Magnetic field strength (H-Field) (μA/m) | Measurement distance (m) |
| 9 - 490 kHz <sup>Note 1</sup>                                       | 6.37/F (F in kHz)                        | 300                      |
| 490 - 1705 kHz                                                      | 63.7/F (F in kHz)                        | 30                       |
| 1.705 - 30 MHz                                                      | 0.08                                     | 30                       |

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

| MHz                 | MHz                   | GHz           |
|---------------------|-----------------------|---------------|
| 0.090 - 0.110       | 149.9 - 150.05        | 9.0 - 9.2     |
| 0.495 - 0.505       | 156.52475 - 156.52525 | 9.3 - 9.5     |
| 2.1735 - 2.1905     | 156.7 - 156.9         | 10.6 - 12.7   |
| 3.020 - 3.026       | 162.0125 - 167.17     | 13.25 - 13.4  |
| 4.125 - 4.128       | 167.72 - 173.2        | 14.47 - 14.5  |
| 4.17725 - 4.17775   | 240 - 285             | 15.35 - 16.2  |
| 4.20725 - 4.20775   | 322 - 335.4           | 17.7 - 21.4   |
| 5.677 - 5.683       | 399.9 - 410           | 22.01 - 23.12 |
| 6.215 - 6.218       | 608 - 614             | 23.6 - 24.0   |
| 6.26775 - 6.26825   | 960 - 1427            | 31.2 - 31.8   |
| 6.31175 - 6.31225   | 1435 - 1626.5         | 36.43 - 36.5  |
| 8.291 - 8.294       | 1645.5 - 1646.5       | Above 38.6    |
| 8.362 - 8.366       | 1660 - 1710           |               |
| 8.37625 - 8.38675   | 1718.8 - 1722.2       |               |
| 8.41425 - 8.41475   | 2200 - 2300           |               |
| 12.29 - 12.293      | 2310 - 2390           |               |
| 12.51975 - 12.52025 | 2483.5 - 2500         |               |
| 12.57675 - 12.57725 | 2655 - 2900           |               |
| 13.36 - 13.41       | 3260 - 3267           |               |
| 16.42 - 16.423      | 3332 - 3339           |               |
| 16.69475 - 16.69525 | 3345.8 - 3358         |               |
| 16.80425 - 16.80475 | 3500 - 4400           |               |
| 25.5 - 25.67        | 4500 - 5150           |               |
| 37.5 - 38.25        | 5350 - 5460           |               |
| 73 - 74.6           | 7250 - 7750           |               |
| 74.8 - 75.2         | 8025 - 8500           |               |
| 108 - 138           |                       |               |

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

| MHz                      | MHz                 | MHz           | GHz              |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.17725-4.17775          | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.20725-4.20775          | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41              |                     |               |                  |

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) (6) and ISED RSS-247 4.6.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

### **TEST PROCEDURE**

Below 30 MHz

The setting of the spectrum analyzer

|       |                                                                  |
|-------|------------------------------------------------------------------|
| RBW   | 200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz) |
| VBW   | 200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz) |
| Sweep | Auto                                                             |

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

|          |          |
|----------|----------|
| RBW      | 120 kHz  |
| VBW      | 300 kHz  |
| Sweep    | Auto     |
| Detector | Peak/QP  |
| Trace    | Max hold |

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step of collecting radiated emission data is to set a spectrum analyzer peak detector mode, pre-scanning the measurement frequency range. Significant peaks then be marked and each peak mark is checked to be highest by slowing down the sweep time, rotated speed of turntable and lifting speed of receive antenna, then switch to receiver mode to read QP value for the marker whose margin is less than 3dB.


Above 1 GHz

The setting of the spectrum analyzer

|          |                                |
|----------|--------------------------------|
| RBW      | 1 MHz                          |
| VBW      | PEAK: 3 MHz<br>AVG: see note 6 |
| Sweep    | Auto                           |
| Detector | Peak                           |
| Trace    | Max hold                       |

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

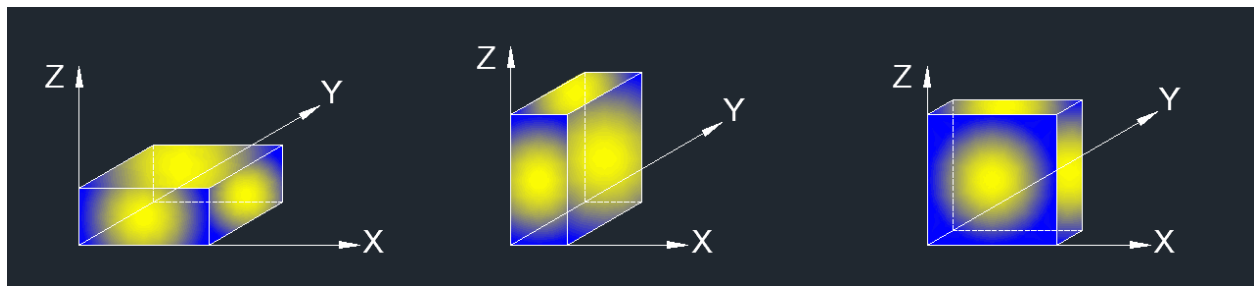

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5.  $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. The peak value is compliant with the QP limit, and the margin is greater than 3dB, QP value is not captured.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 9 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (9 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


## **TEST SETUP**

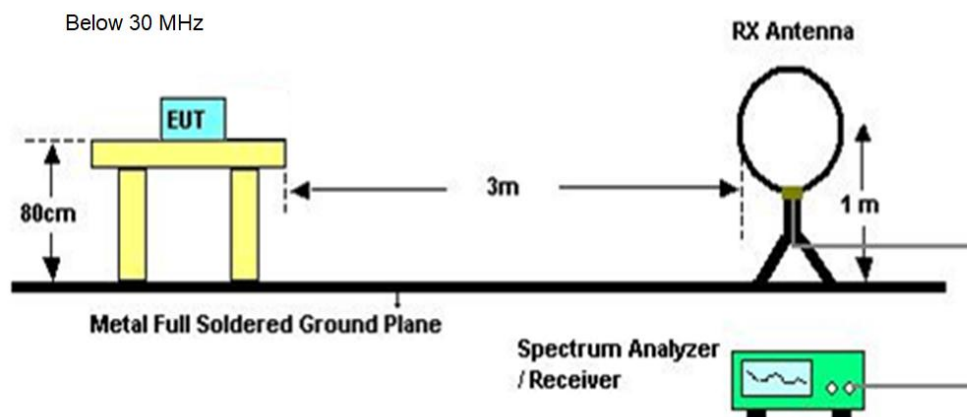

Below 1 GHz and above 30 MHz

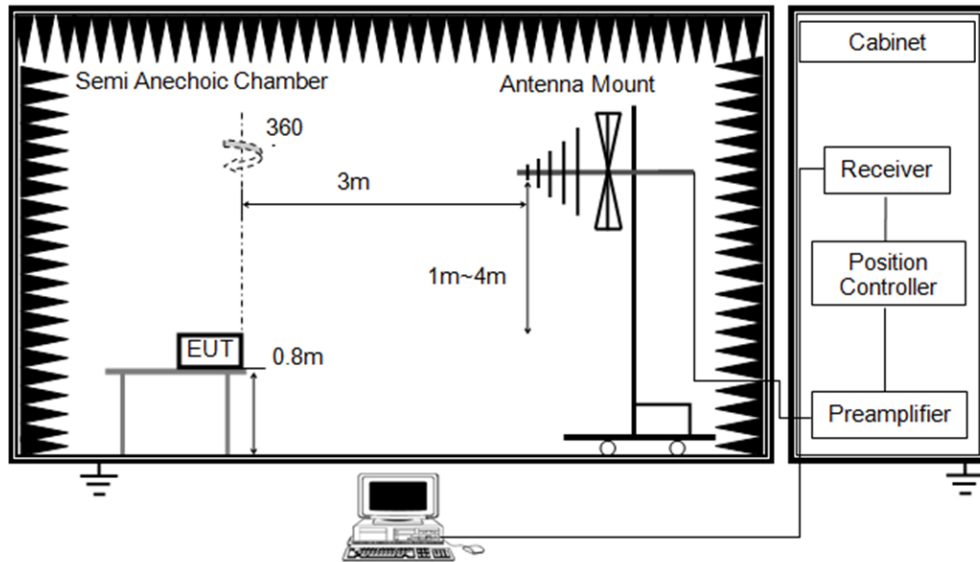

Above 1GHz

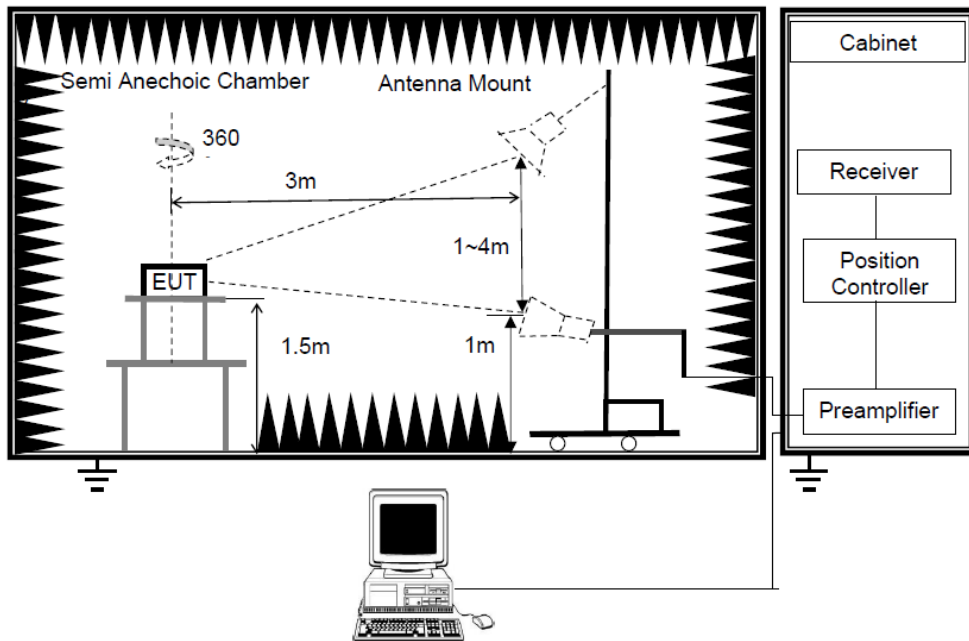

### TEST ENVIRONMENT

|                     |        |                   |       |
|---------------------|--------|-------------------|-------|
| Temperature         | 21.1℃  | Relative Humidity | 59.2% |
| Atmosphere Pressure | 101kPa | Test Voltage      |       |


### TEST DATE / ENGINEER

|           |                |         |            |
|-----------|----------------|---------|------------|
| Test Date | August 6, 2025 | Test By | Mason Wang |
|-----------|----------------|---------|------------|

## TEST RESULTS


### 8.1. RESTRICTED BANDEDGE

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11a 20 PK | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

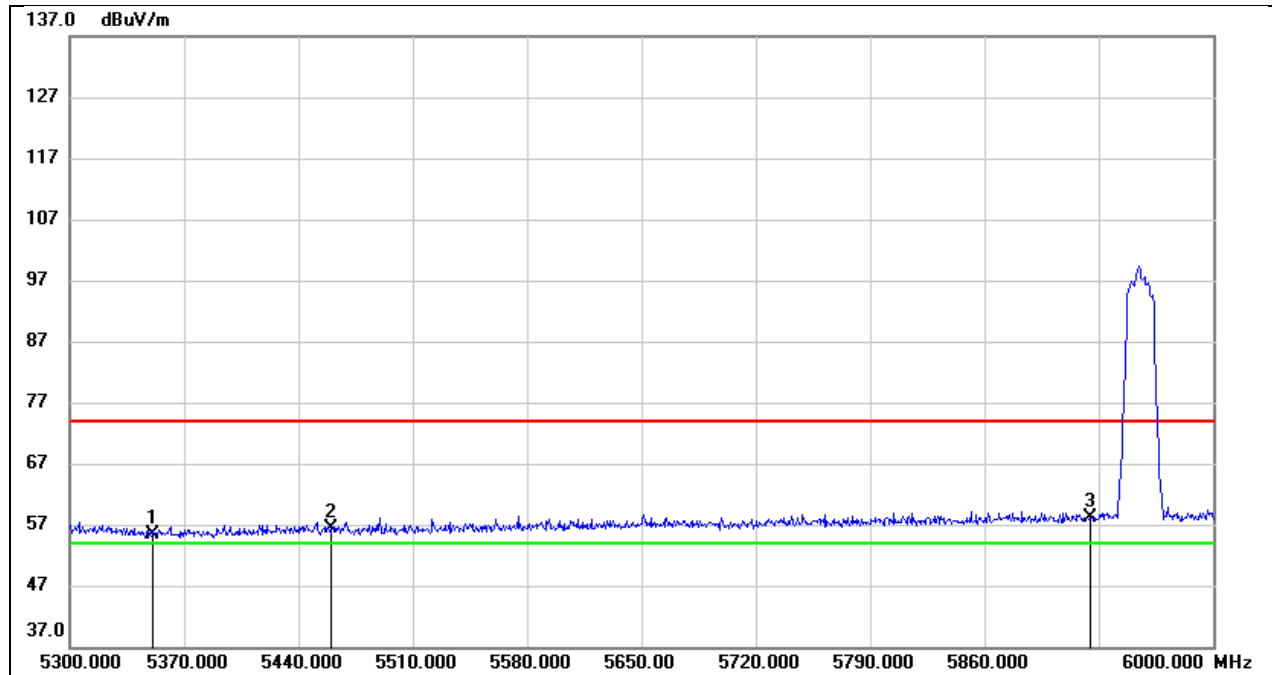


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 16.21          | 39.25          | 55.46           | 74.00          | -18.54      | peak   |
| 2   | 5460.000        | 16.90          | 39.48          | 56.38           | 74.00          | -17.62      | peak   |
| 3   | 5925.000        | 17.82          | 40.28          | 58.10           | 74.00          | -15.90      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11a 20 AV | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

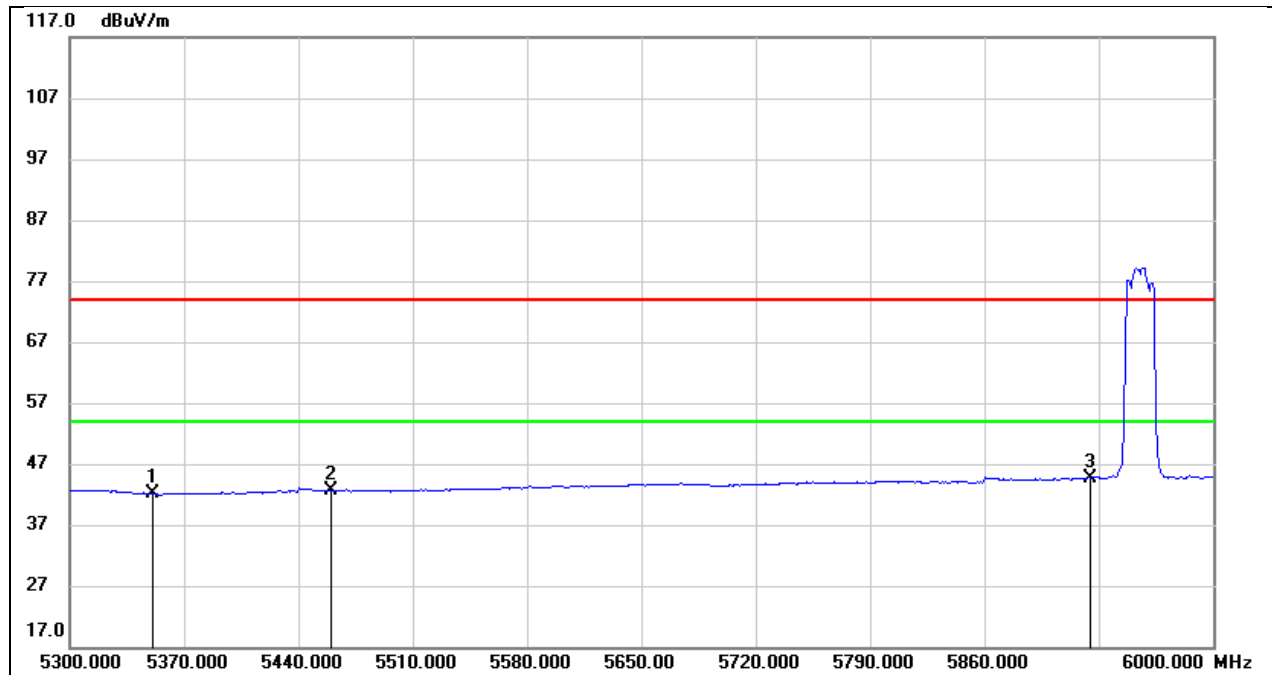


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 2.82           | 39.25          | 42.07           | 54.00          | -11.93      | AVG    |
| 2   | 5460.000        | 3.07           | 39.48          | 42.55           | 54.00          | -11.45      | AVG    |
| 3   | 5925.000        | 4.45           | 40.28          | 44.73           | 54.00          | -9.27       | AVG    |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11a 20 PK | Frequency(MHz): | 5955      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

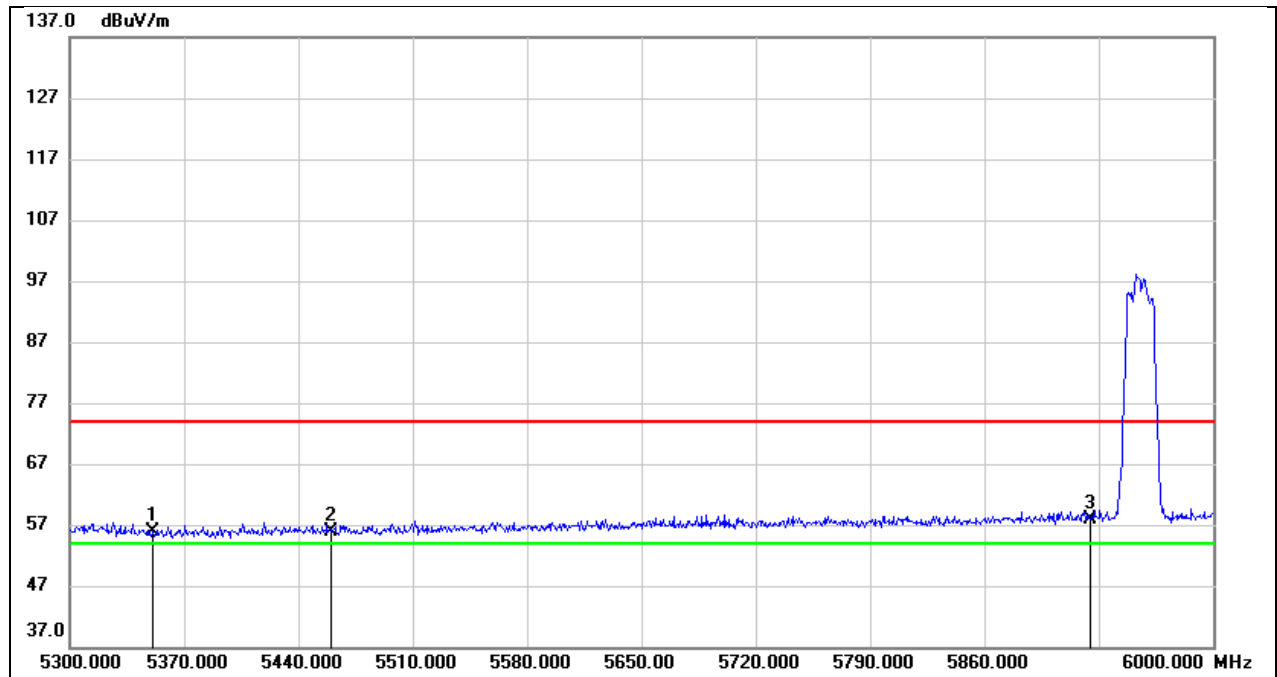


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 16.58          | 39.25          | 55.83           | 74.00          | -18.17      | peak   |
| 2   | 5460.000        | 16.40          | 39.48          | 55.88           | 74.00          | -18.12      | peak   |
| 3   | 5925.000        | 17.60          | 40.28          | 57.88           | 74.00          | -16.12      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11a 20 AV | Frequency(MHz): | 5955      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

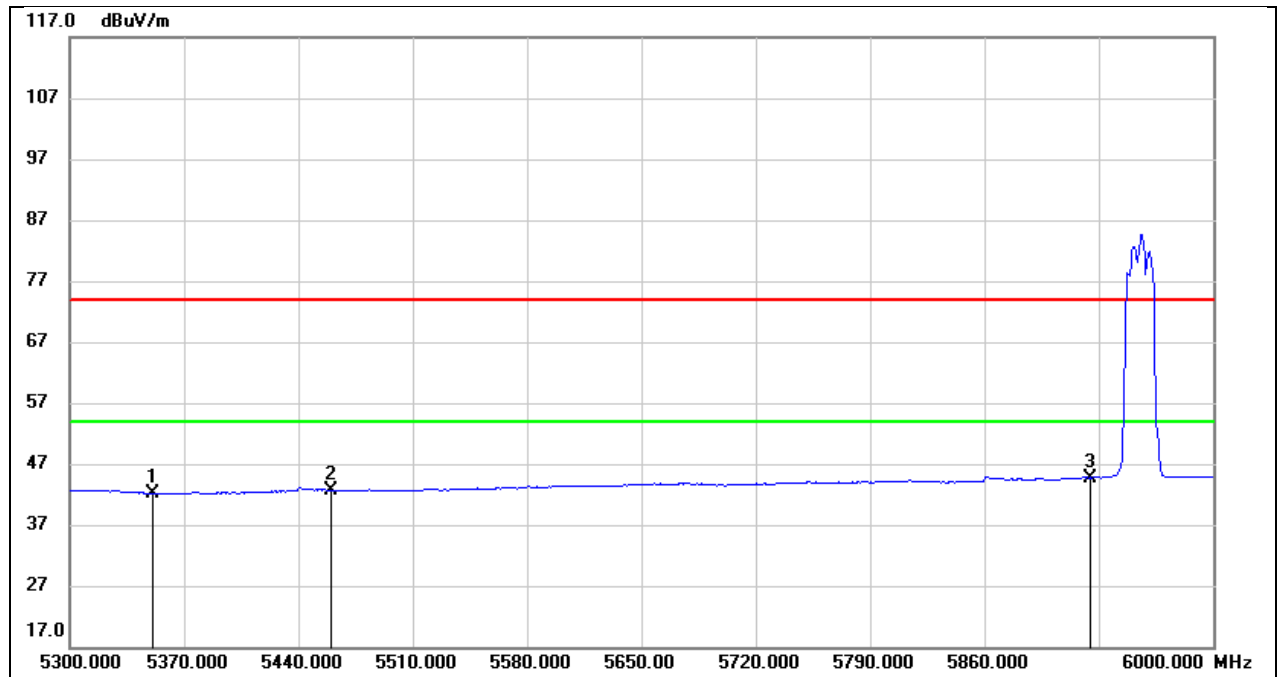


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 2.90           | 39.25          | 42.15           | 54.00          | -11.85      | AVG    |
| 2   | 5460.000        | 3.17           | 39.48          | 42.65           | 54.00          | -11.35      | AVG    |
| 3   | 5925.000        | 4.47           | 40.28          | 44.75           | 54.00          | -9.25       | AVG    |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11a 20 PK | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

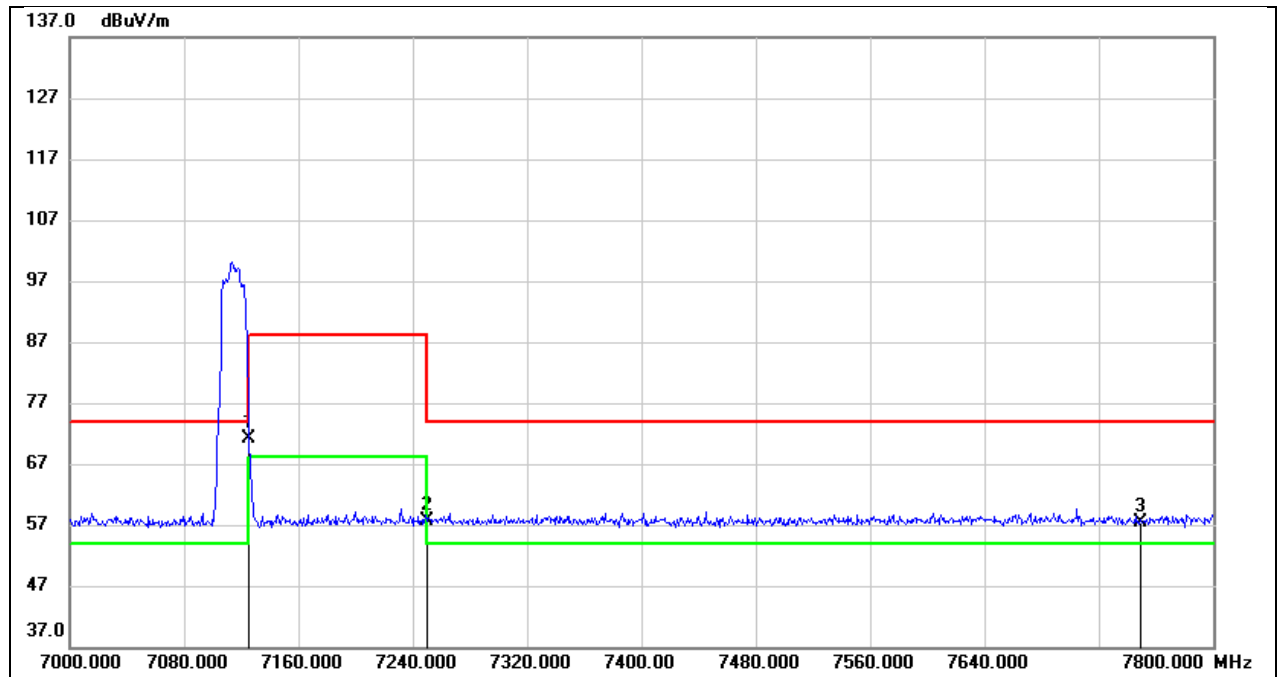


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 27.72          | 43.53          | 71.25           | 88.20          | -16.95      | peak   |
| 2   | 7250.000        | 13.84          | 43.69          | 57.53           | 74.00          | -16.47      | peak   |
| 3   | 7750.000        | 13.20          | 44.07          | 57.27           | 74.00          | -16.73      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11a 20 AV | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

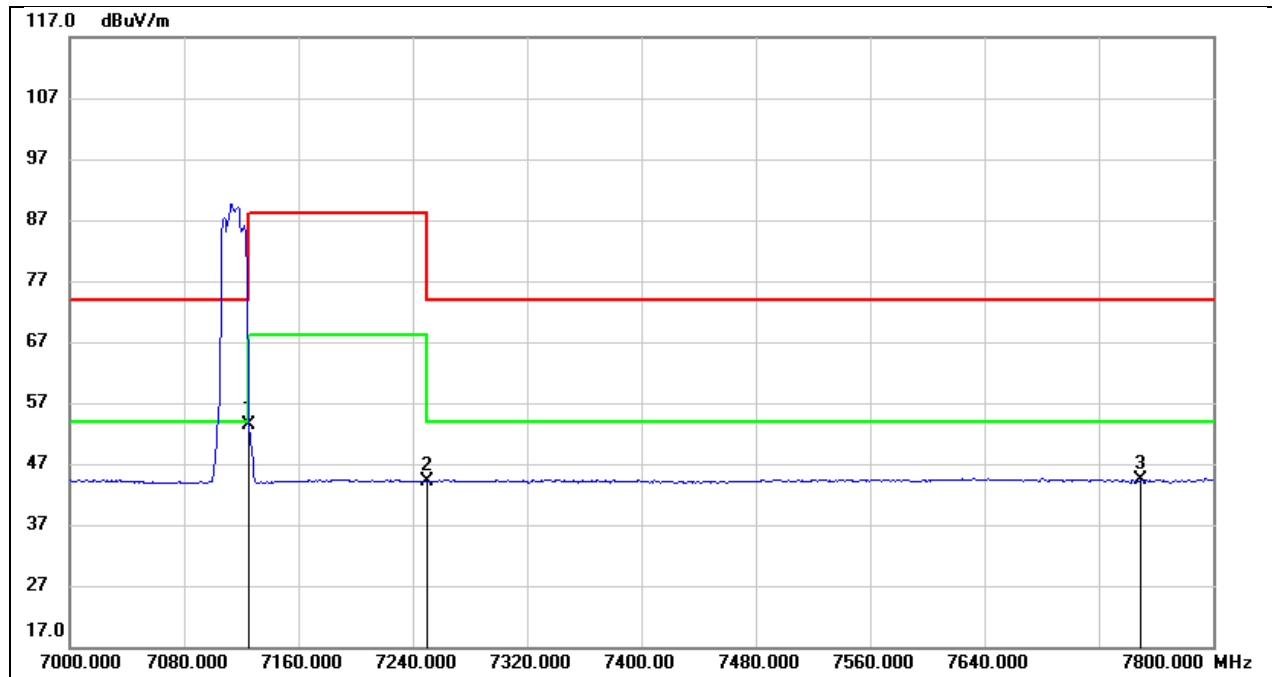


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 9.88           | 43.53          | 53.41           | 68.20          | -14.79      | AVG    |
| 2   | 7250.000        | 0.54           | 43.69          | 44.23           | 54.00          | -9.77       | AVG    |
| 3   | 7750.000        | 0.26           | 44.07          | 44.33           | 54.00          | -9.67       | AVG    |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 PK | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

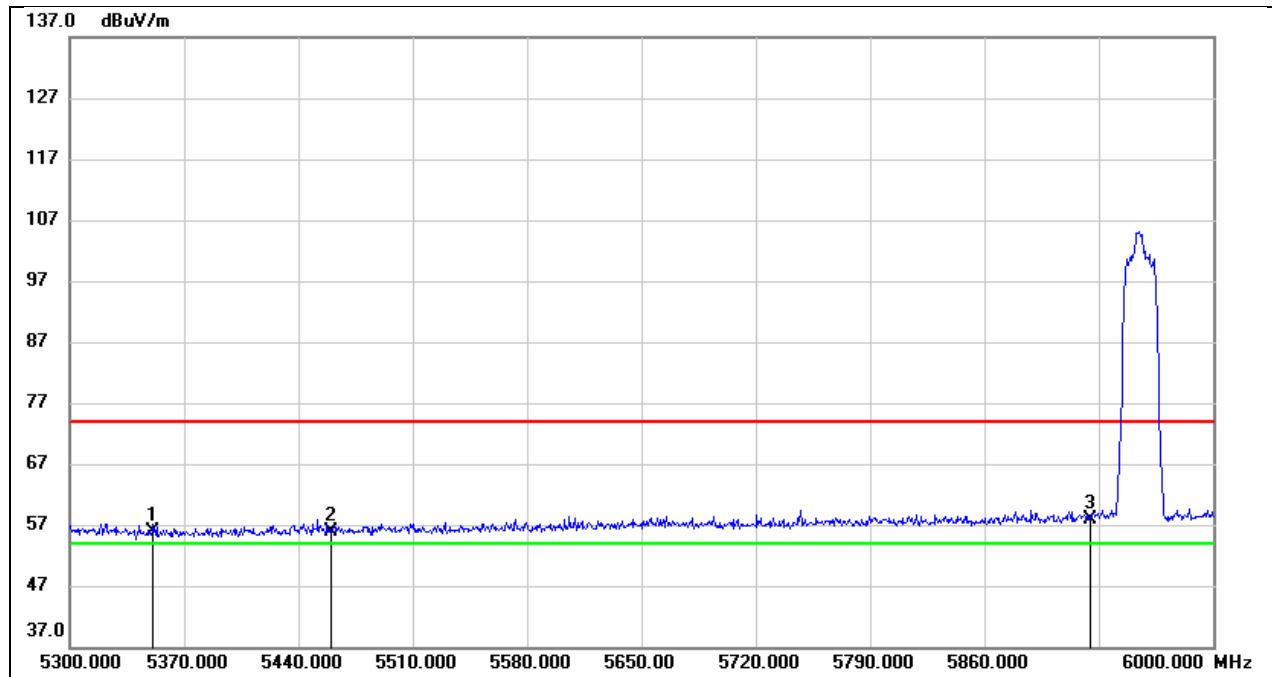


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 16.63          | 39.25          | 55.88           | 74.00          | -18.12      | peak   |
| 2   | 5460.000        | 16.50          | 39.48          | 55.98           | 74.00          | -18.02      | peak   |
| 3   | 5925.000        | 17.67          | 40.28          | 57.95           | 74.00          | -16.05      | peak   |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 AV | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

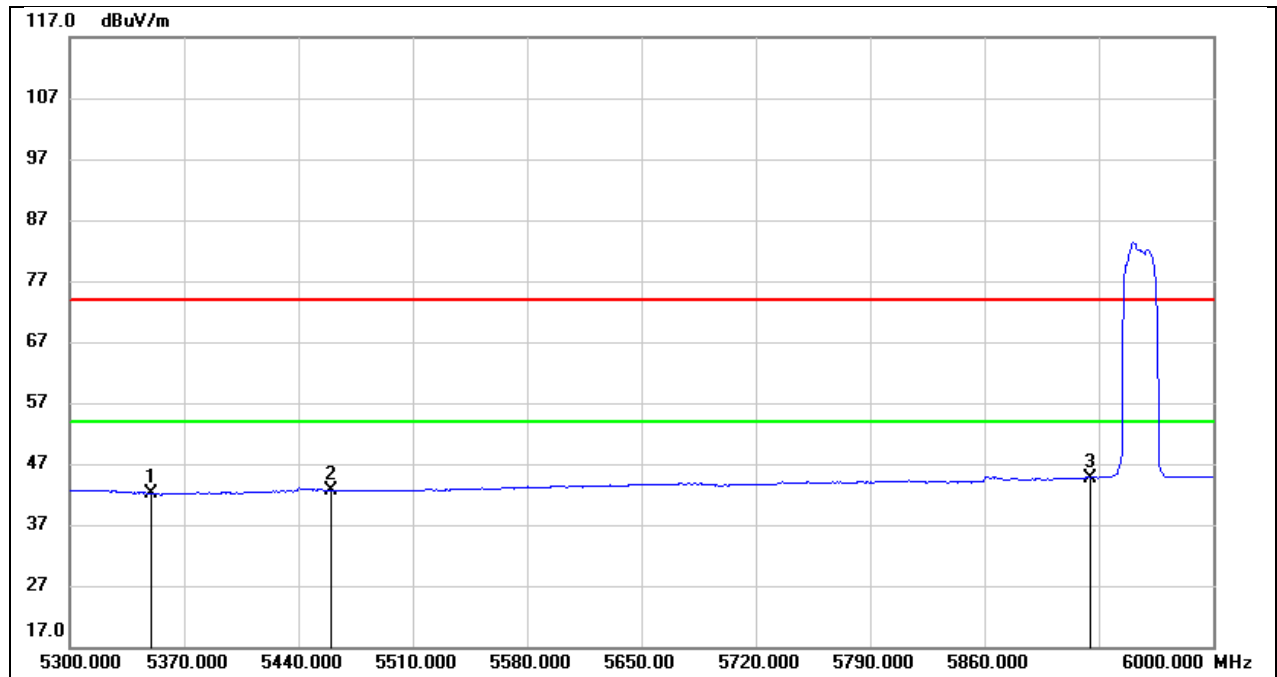


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 2.87           | 39.25          | 42.12           | 54.00          | -11.88      | AVG    |
| 2   | 5460.000        | 3.15           | 39.48          | 42.63           | 54.00          | -11.37      | AVG    |
| 3   | 5925.000        | 4.42           | 40.28          | 44.70           | 54.00          | -9.30       | AVG    |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 PK | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

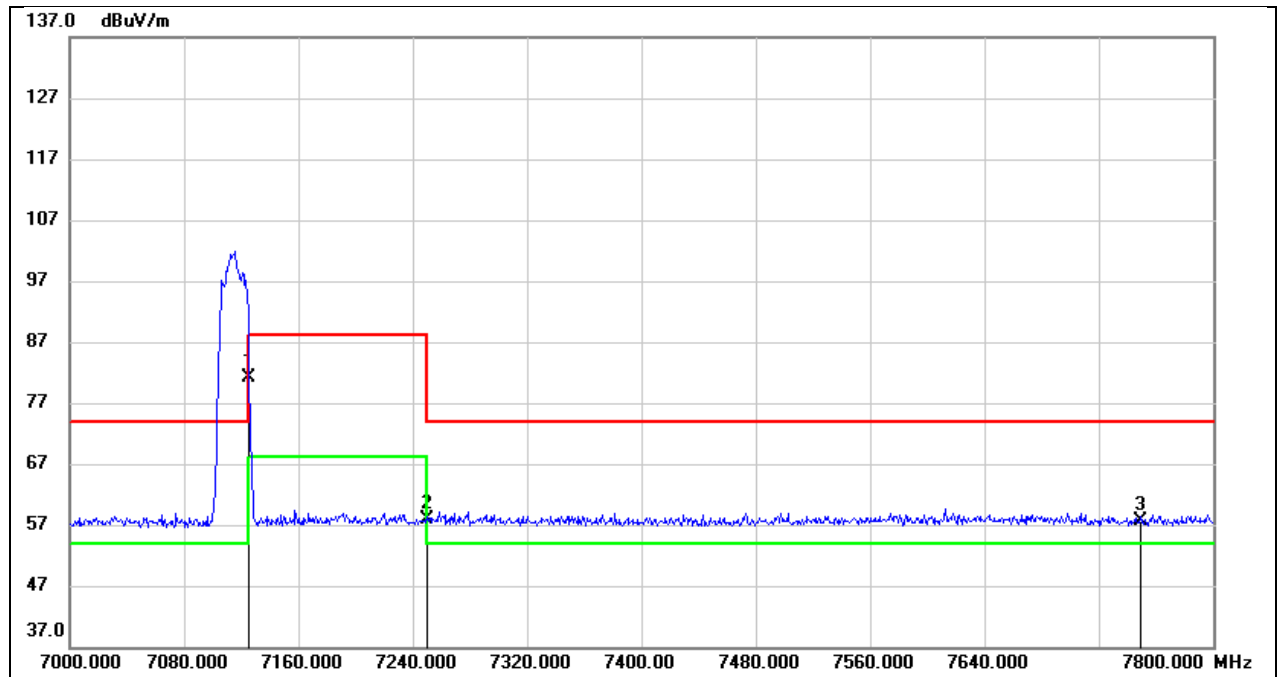


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 37.58          | 43.53          | 81.11           | 88.20          | -7.09       | peak   |
| 2   | 7250.000        | 14.27          | 43.69          | 57.96           | 74.00          | -16.04      | peak   |
| 3   | 7750.000        | 13.50          | 44.07          | 57.57           | 74.00          | -16.43      | peak   |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 AV | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

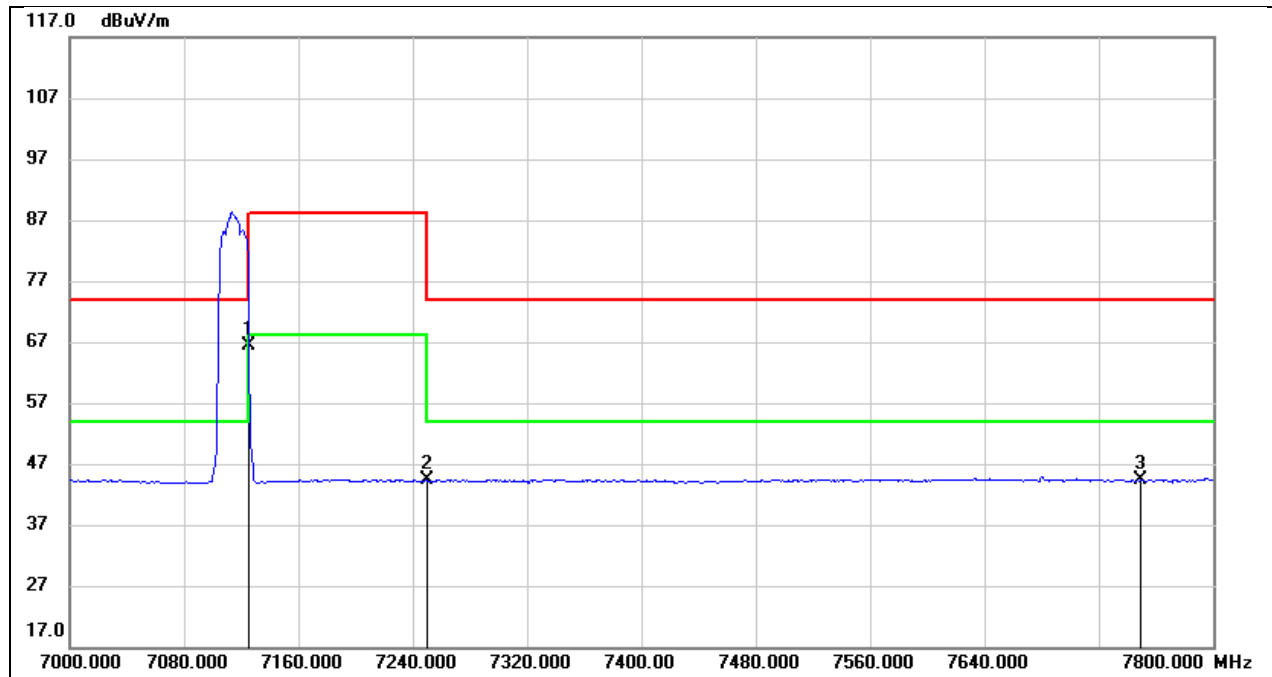


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 22.91          | 43.53          | 66.44           | 68.20          | -1.76       | AVG    |
| 2   | 7250.000        | 0.59           | 43.69          | 44.28           | 54.00          | -9.72       | AVG    |
| 3   | 7750.000        | 0.27           | 44.07          | 44.34           | 54.00          | -9.66       | AVG    |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 PK | Frequency(MHz): | 5965      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

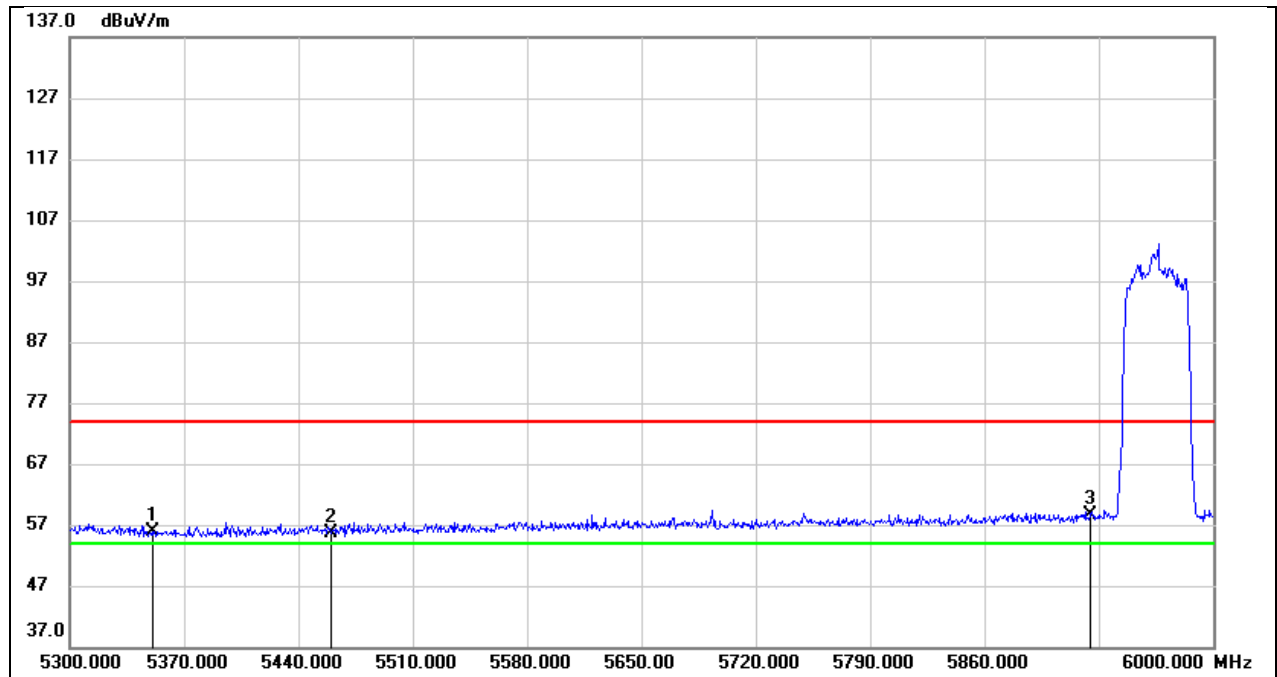


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 16.65          | 39.25          | 55.90           | 74.00          | -18.10      | peak   |
| 2   | 5460.000        | 16.27          | 39.48          | 55.75           | 74.00          | -18.25      | peak   |
| 3   | 5925.000        | 18.38          | 40.28          | 58.66           | 74.00          | -15.34      | peak   |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 AV | Frequency(MHz): | 5965      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

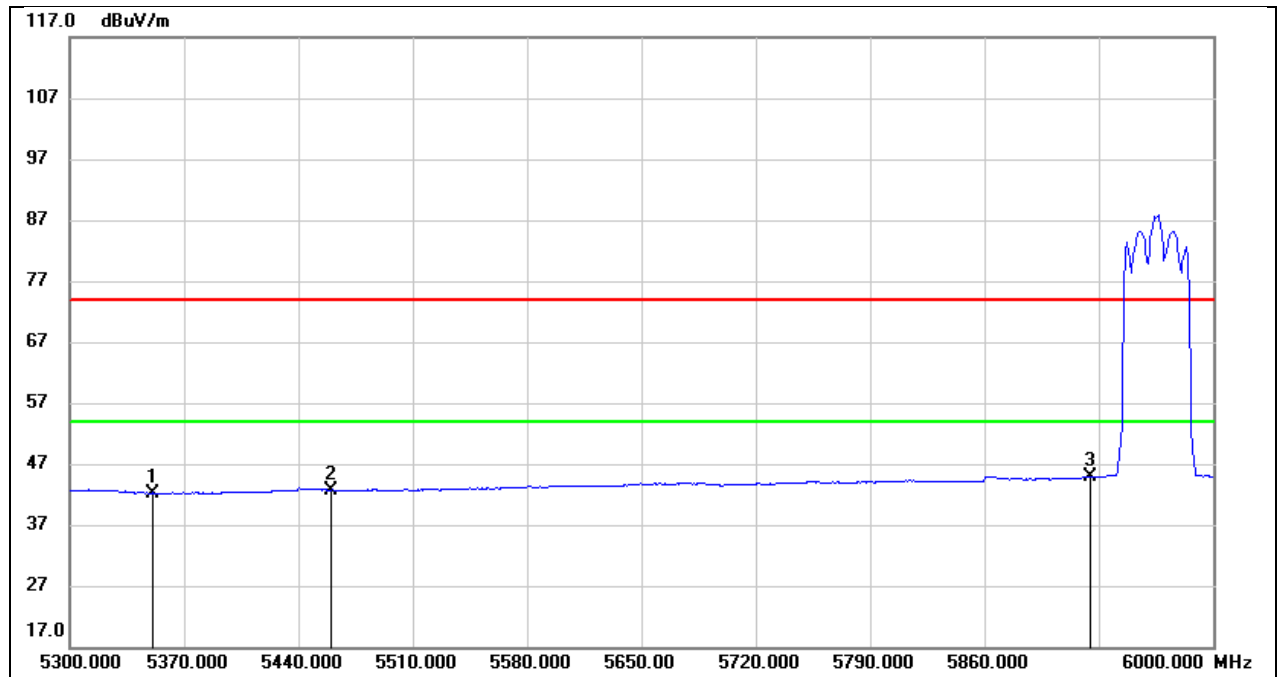


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 2.87           | 39.25          | 42.12           | 54.00          | -11.88      | AVG    |
| 2   | 5460.000        | 3.26           | 39.48          | 42.74           | 54.00          | -11.26      | AVG    |
| 3   | 5925.000        | 4.55           | 40.28          | 44.83           | 54.00          | -9.17       | AVG    |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 PK | Frequency(MHz): | 7085      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

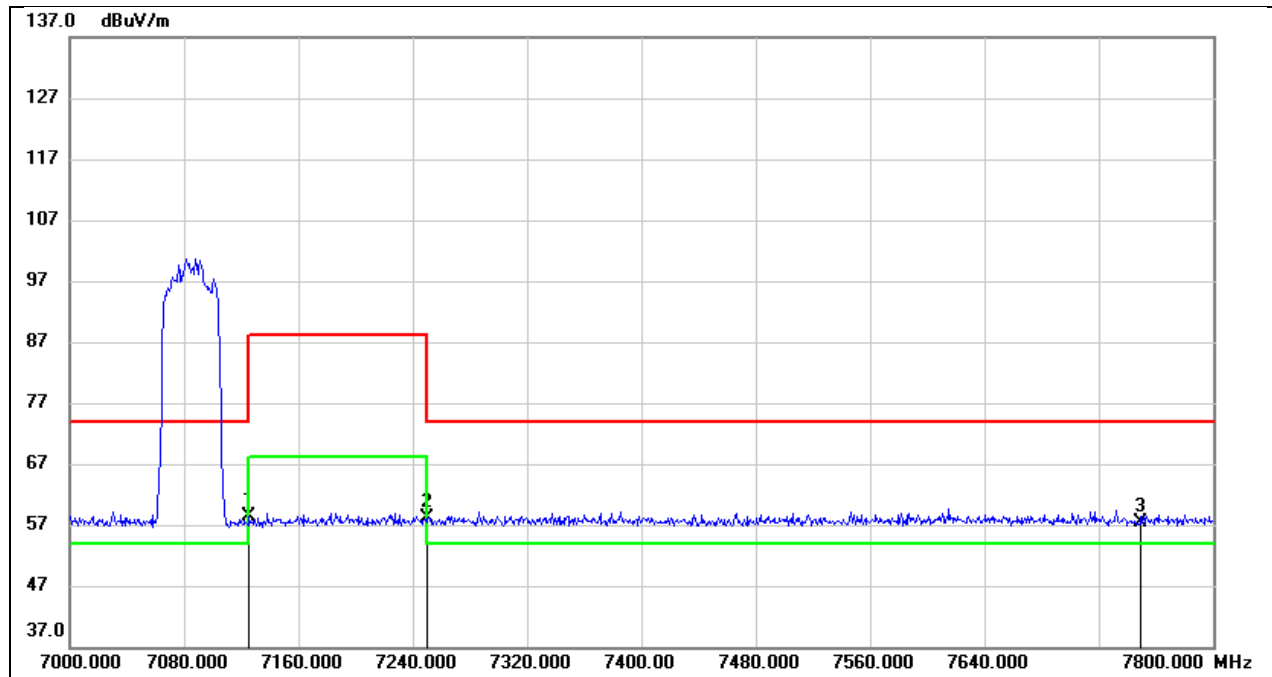


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 14.74          | 43.53          | 58.27           | 88.20          | -29.93      | peak   |
| 2   | 7250.000        | 14.53          | 43.69          | 58.22           | 74.00          | -15.78      | peak   |
| 3   | 7750.000        | 13.42          | 44.07          | 57.49           | 74.00          | -16.51      | peak   |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 AV | Frequency(MHz): | 7085      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

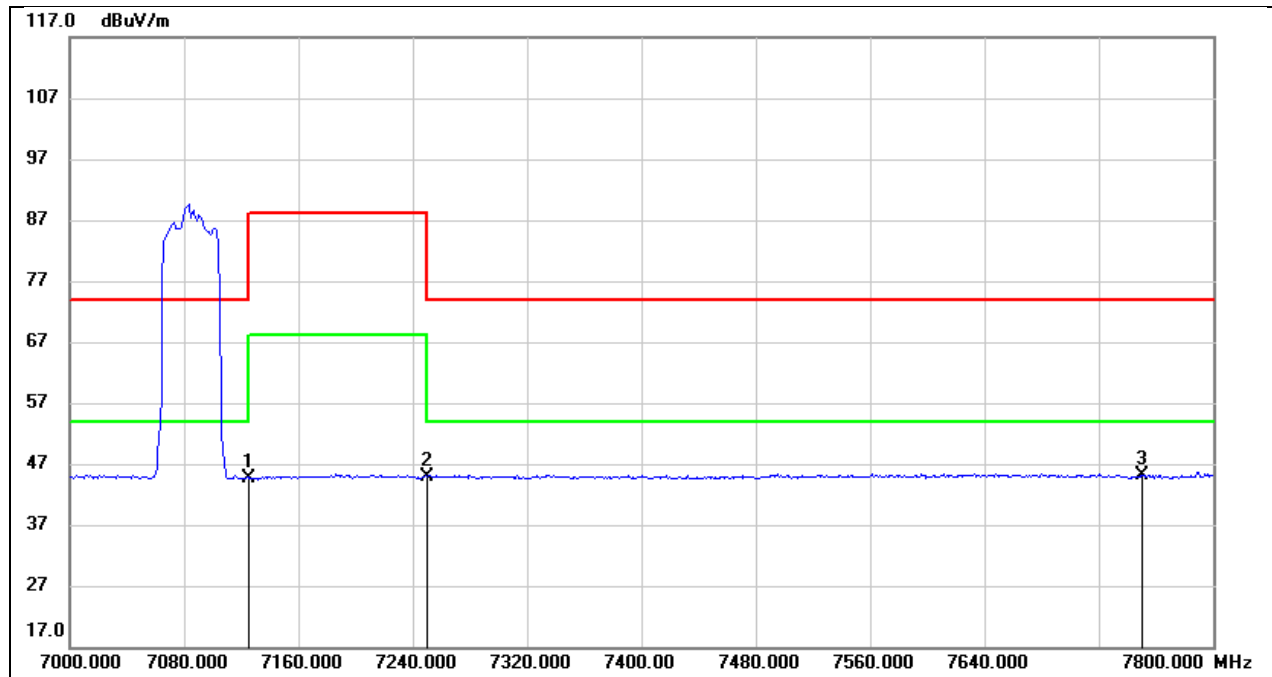


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 1.10           | 43.53          | 44.63           | 68.20          | -23.57      | AVG    |
| 2   | 7250.000        | 1.17           | 43.69          | 44.86           | 54.00          | -9.14       | AVG    |
| 3   | 7750.000        | 1.06           | 44.07          | 45.13           | 54.00          | -8.87       | AVG    |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 PK | Frequency(MHz): | 5985      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

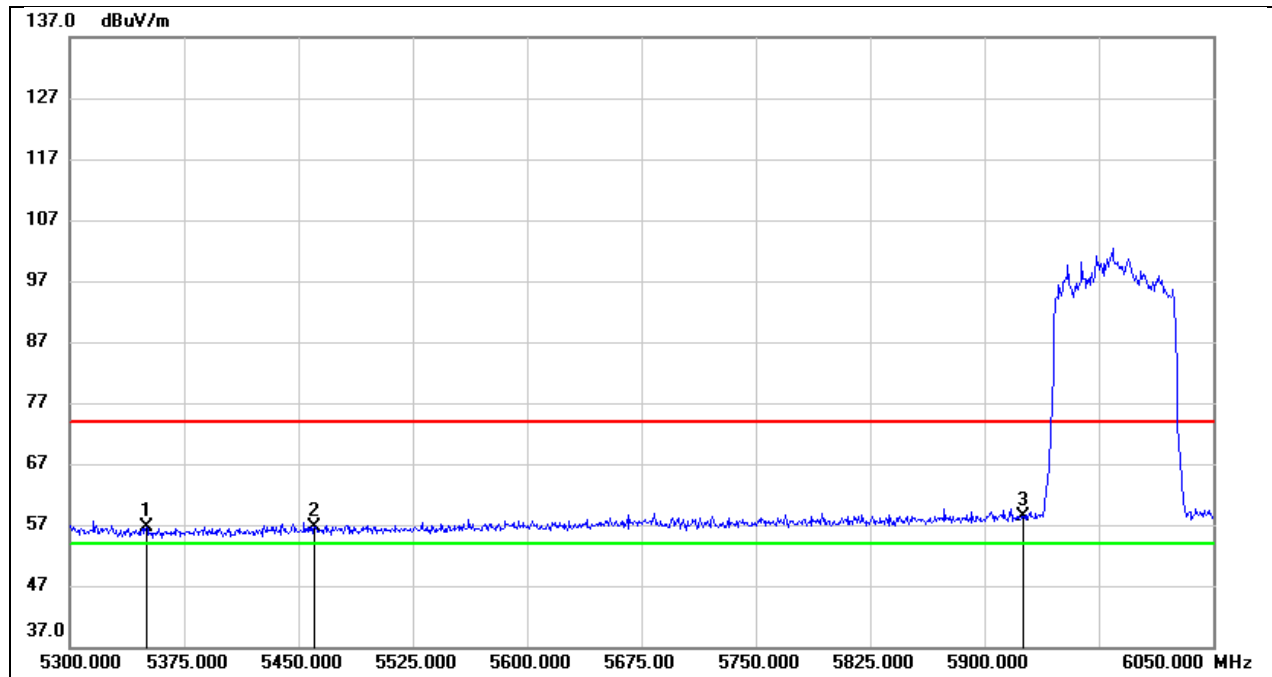


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 17.47          | 39.25          | 56.72           | 74.00          | -17.28      | peak   |
| 2   | 5460.000        | 17.05          | 39.48          | 56.53           | 74.00          | -17.47      | peak   |
| 3   | 5925.000        | 18.17          | 40.28          | 58.45           | 74.00          | -15.55      | peak   |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 AV | Frequency(MHz): | 5985      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

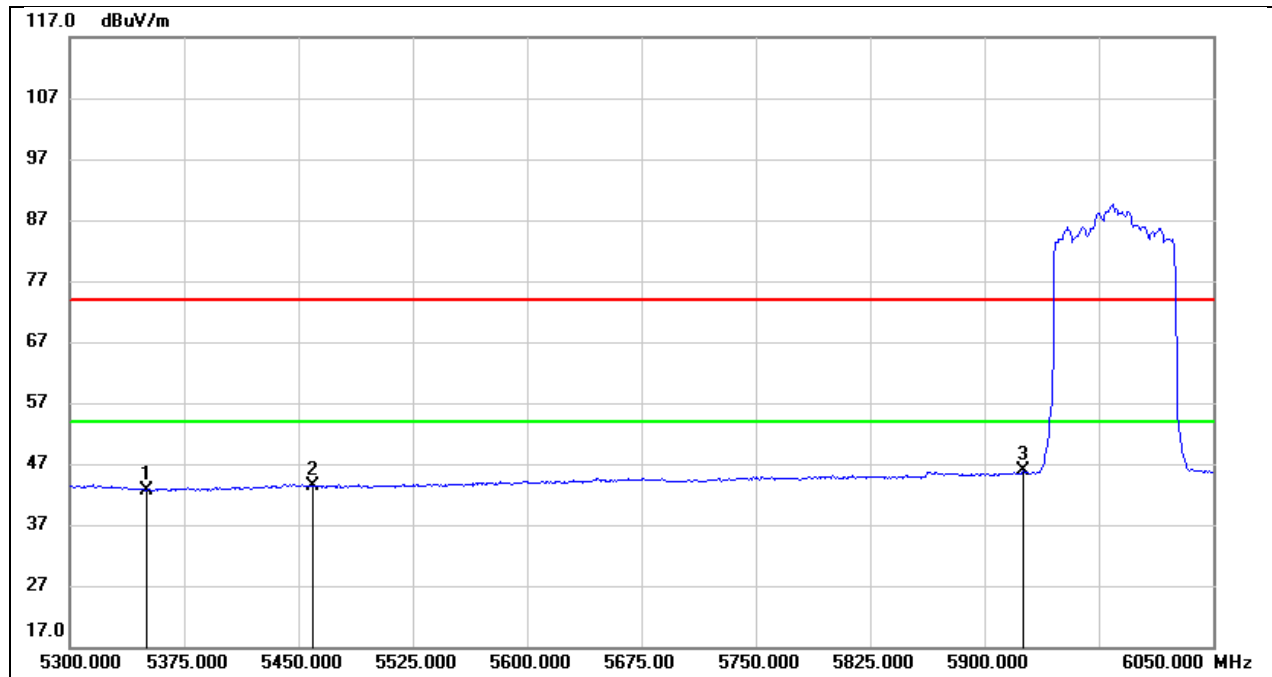


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 3.45           | 39.25          | 42.70           | 54.00          | -11.30      | AVG    |
| 2   | 5460.000        | 3.80           | 39.48          | 43.28           | 54.00          | -10.72      | AVG    |
| 3   | 5925.000        | 5.49           | 40.28          | 45.77           | 54.00          | -8.23       | AVG    |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 PK | Frequency(MHz): | 7025      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

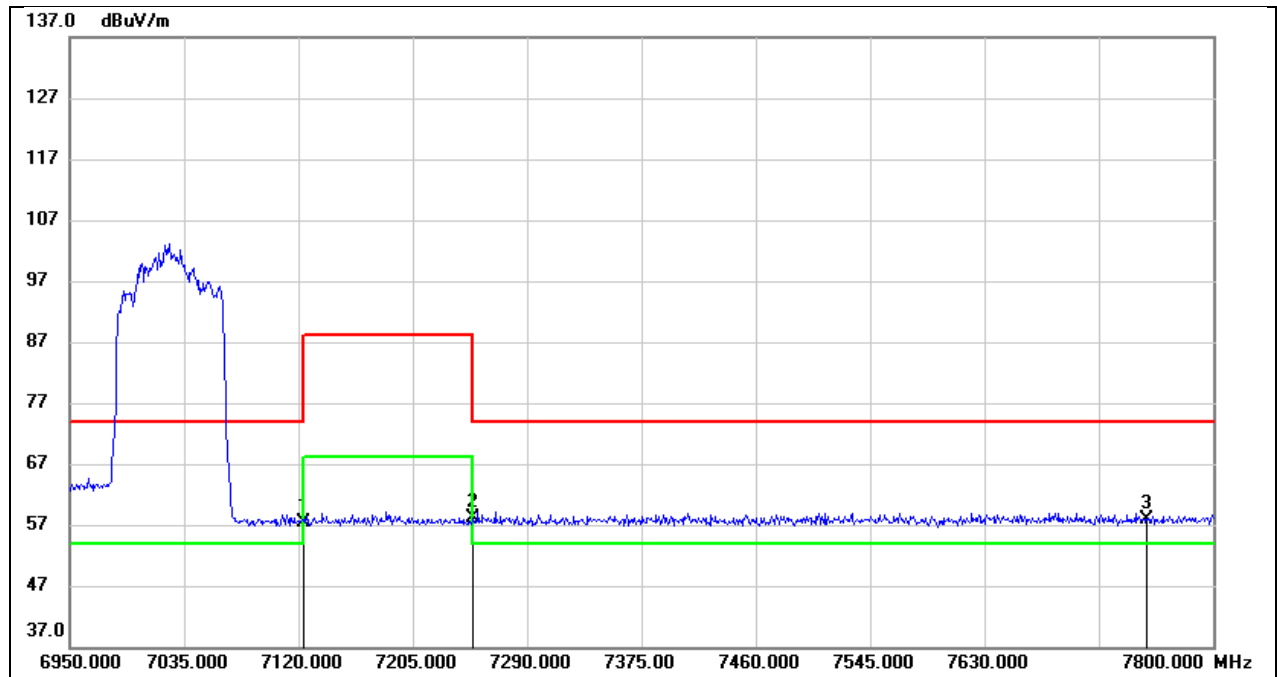


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 13.79          | 43.53          | 57.32           | 88.20          | -30.88      | peak   |
| 2   | 7250.000        | 14.36          | 43.69          | 58.05           | 74.00          | -15.95      | peak   |
| 3   | 7750.000        | 13.87          | 44.07          | 57.94           | 74.00          | -16.06      | peak   |

|            |                  |                 |           |
|------------|------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 AV | Frequency(MHz): | 7025      |
| Polarity:  | Horizontal       | Test Voltage:   | DC 3.635V |

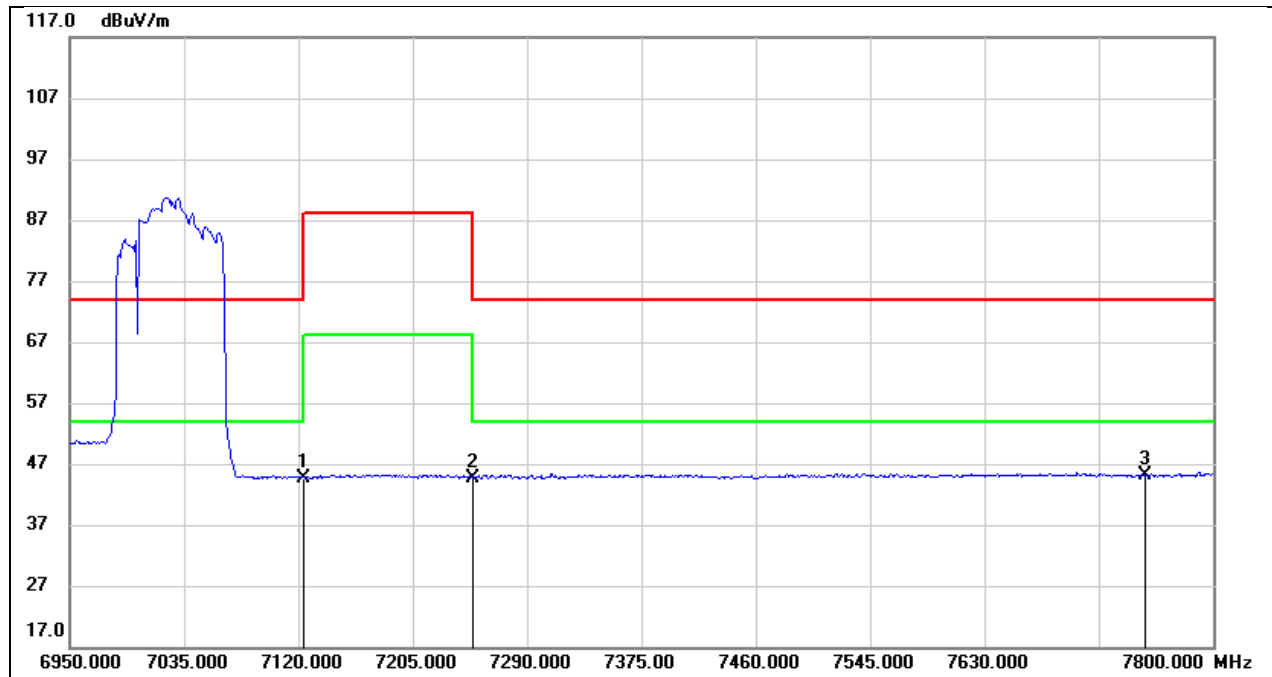


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 1.21           | 43.53          | 44.74           | 68.20          | -23.46      | AVG    |
| 2   | 7250.000        | 1.05           | 43.69          | 44.74           | 54.00          | -9.26       | AVG    |
| 3   | 7750.000        | 1.08           | 44.07          | 45.15           | 54.00          | -8.85       | AVG    |

|            |                   |                 |           |
|------------|-------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 PK | Frequency(MHz): | 6025      |
| Polarity:  | Horizontal        | Test Voltage:   | DC 3.635V |

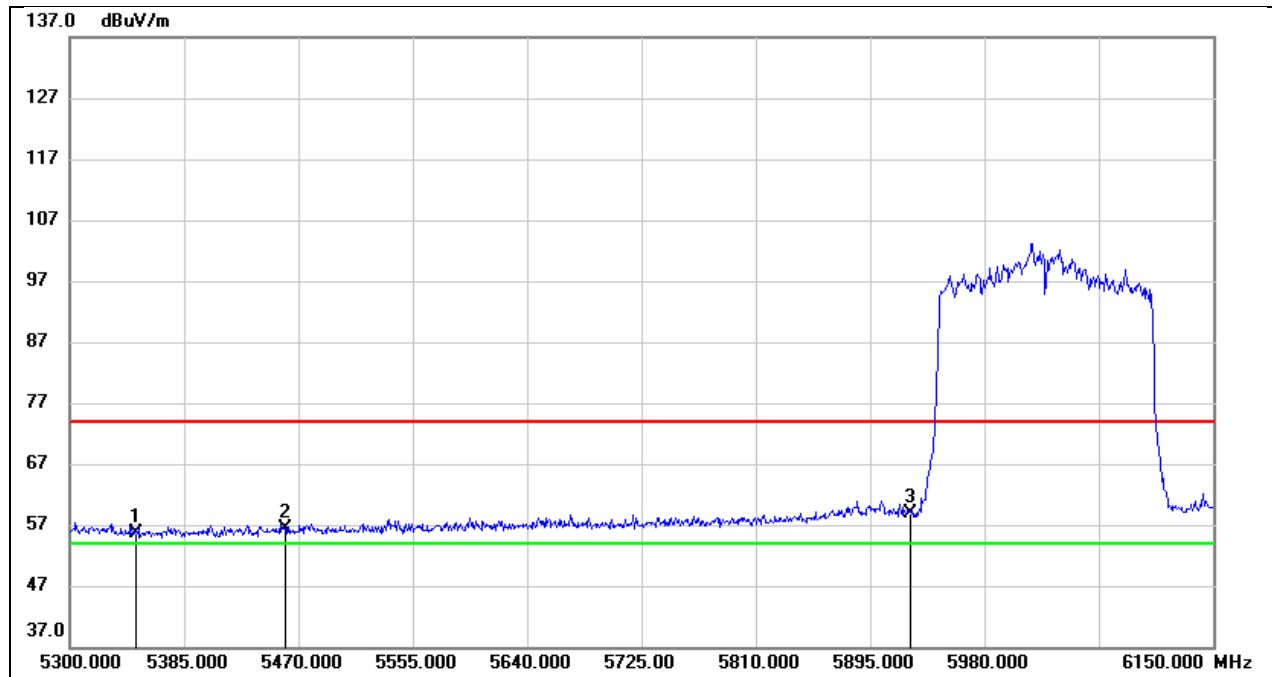


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 16.40          | 39.25          | 55.65           | 74.00          | -18.35      | peak   |
| 2   | 5460.000        | 16.86          | 39.48          | 56.34           | 74.00          | -17.66      | peak   |
| 3   | 5925.000        | 18.55          | 40.28          | 58.83           | 74.00          | -15.17      | peak   |

|            |                   |                 |           |
|------------|-------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 AV | Frequency(MHz): | 6025      |
| Polarity:  | Horizontal        | Test Voltage:   | DC 3.635V |

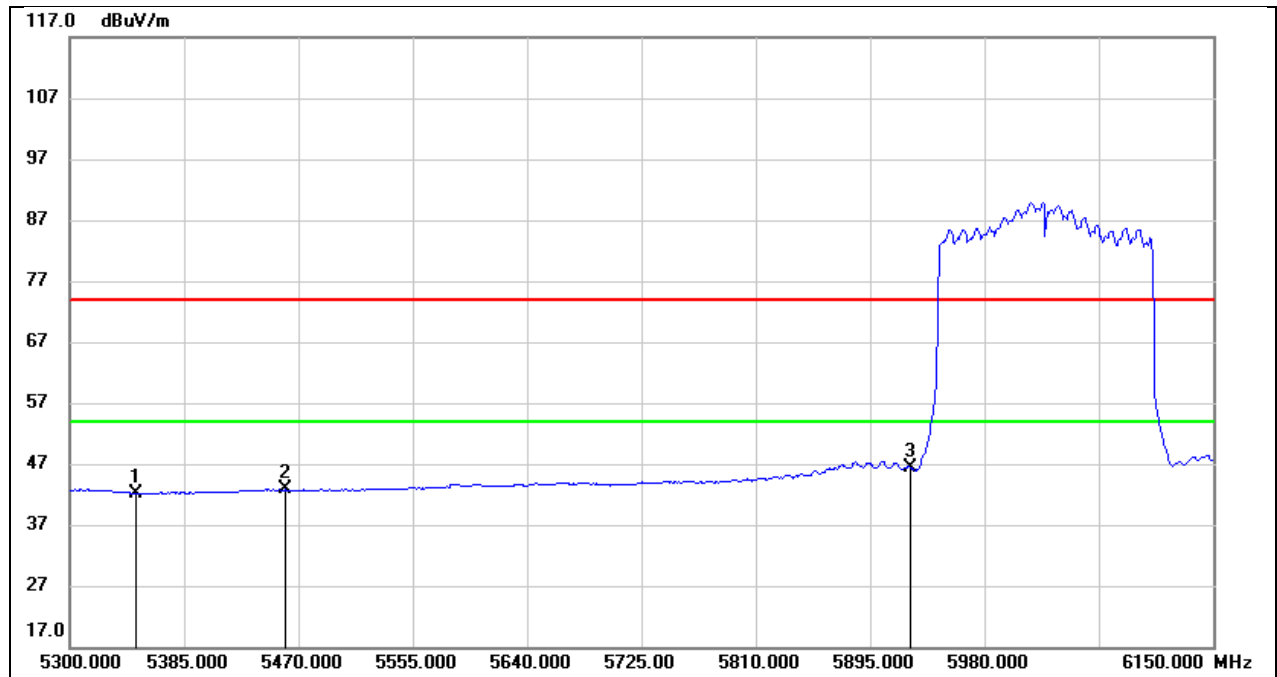


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 2.90           | 39.25          | 42.15           | 54.00          | -11.85      | AVG    |
| 2   | 5460.000        | 3.28           | 39.48          | 42.76           | 54.00          | -11.24      | AVG    |
| 3   | 5925.000        | 6.06           | 40.28          | 46.34           | 54.00          | -7.66       | AVG    |

|            |                   |                 |           |
|------------|-------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 PK | Frequency(MHz): | 6985      |
| Polarity:  | Horizontal        | Test Voltage:   | DC 3.635V |

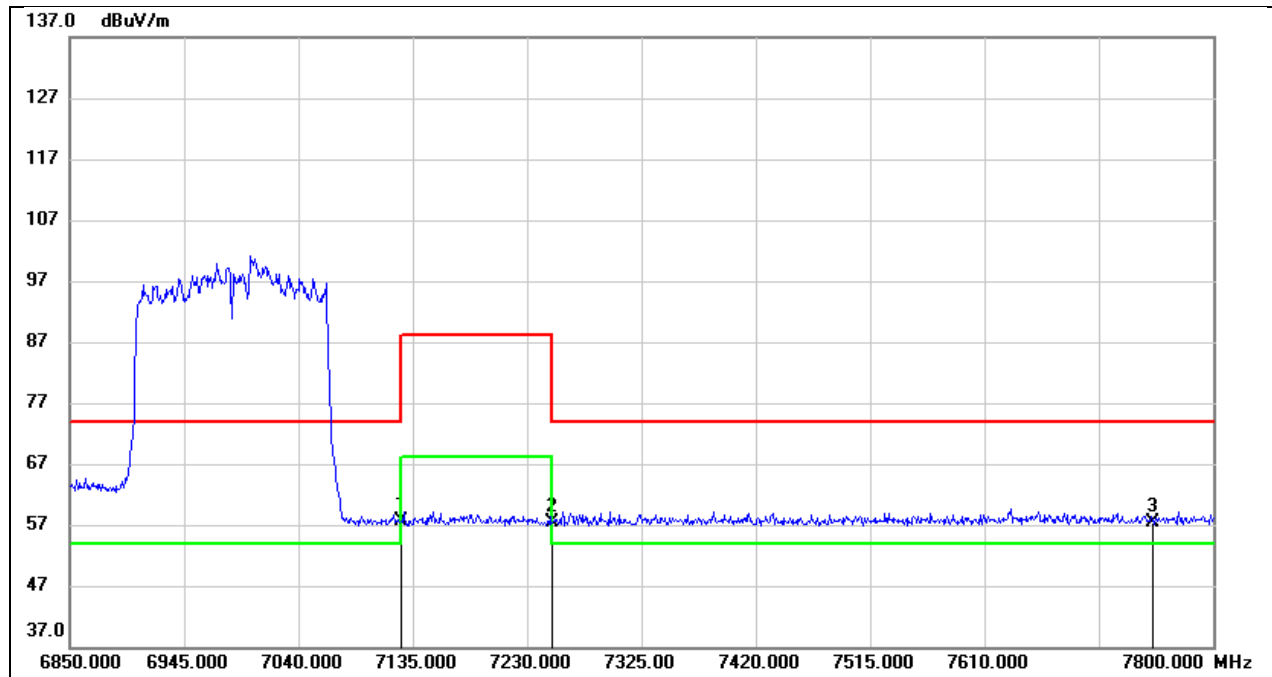

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 14.04          | 43.53          | 57.57           | 88.20          | -30.63      | peak   |
| 2   | 7250.000        | 13.71          | 43.69          | 57.40           | 74.00          | -16.60      | peak   |
| 3   | 7750.000        | 13.28          | 44.07          | 57.35           | 74.00          | -16.65      | peak   |

|            |                   |                 |           |
|------------|-------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 AV | Frequency(MHz): | 6985      |
| Polarity:  | Horizontal        | Test Voltage:   | DC 3.635V |

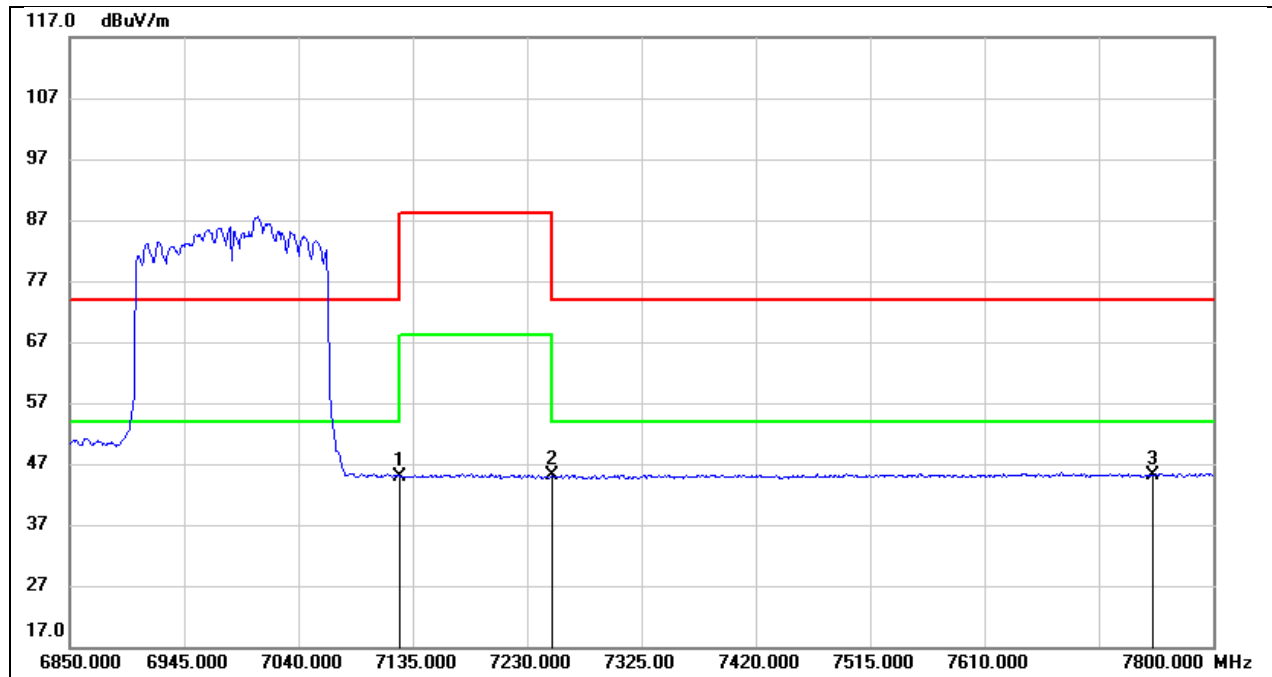


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 1.33           | 43.53          | 44.86           | 68.20          | -23.34      | AVG    |
| 2   | 7250.000        | 1.35           | 43.69          | 45.04           | 54.00          | -8.96       | AVG    |
| 3   | 7750.000        | 1.01           | 44.07          | 45.08           | 54.00          | -8.92       | AVG    |

Note: Indoor Client and Standard Power Client have been tested, only the worst data of Indoor Client-UNII-6/-8 and Standard Power Client-UNII-5/-7 were recorded in the report.


## 8.2. RESTRICTED BANDEDGE PARTIAL RU

|            |                                |                 |           |
|------------|--------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 PK | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                     | Test Voltage:   | DC 3.635V |

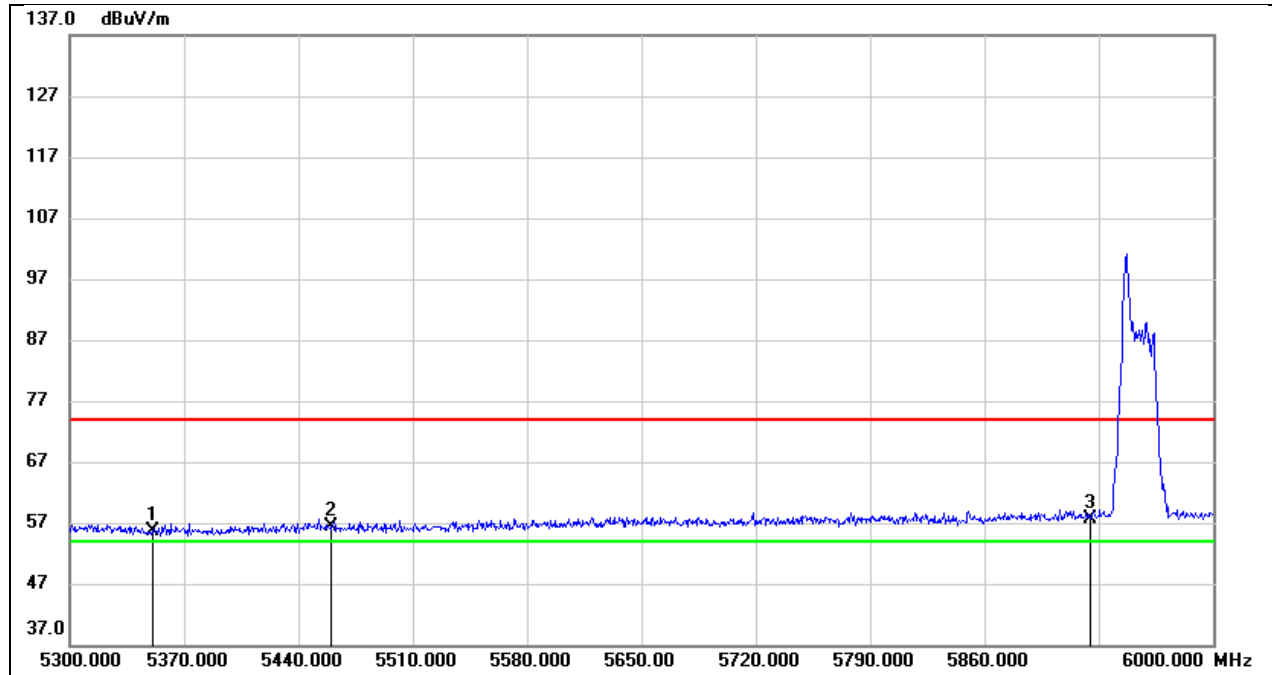


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 5350.000           | 16.47             | 39.25             | 55.72              | 74.00             | -18.28         | peak   |
| 2   | 5460.000           | 16.84             | 39.48             | 56.32              | 74.00             | -17.68         | peak   |
| 3   | 5925.000           | 17.35             | 40.28             | 57.63              | 74.00             | -16.37         | peak   |

|            |                                |                 |           |
|------------|--------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 AV | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                     | Test Voltage:   | DC 3.635V |

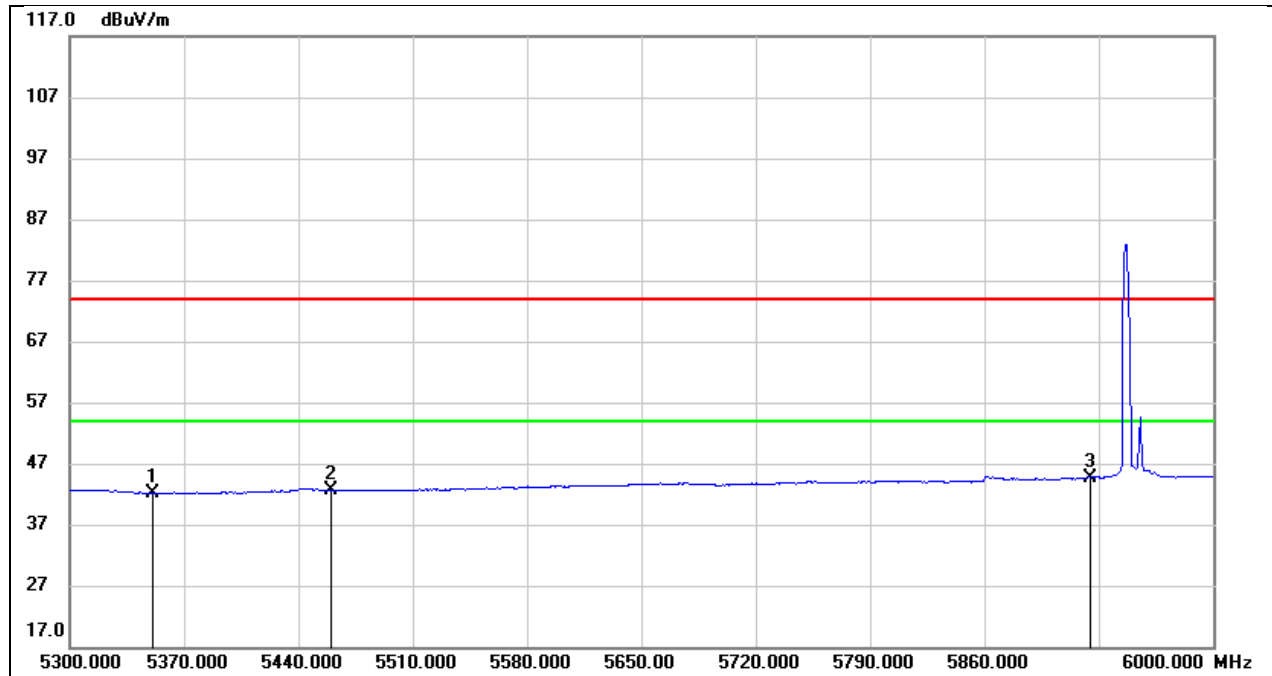


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 5350.000           | 2.86              | 39.25             | 42.11              | 54.00             | -11.89         | AVG    |
| 2   | 5460.000           | 3.13              | 39.48             | 42.61              | 54.00             | -11.39         | AVG    |
| 3   | 5925.000           | 4.43              | 40.28             | 44.71              | 54.00             | -9.29          | AVG    |

|            |                                 |                 |           |
|------------|---------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone52 RU37 PK | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                      | Test Voltage:   | DC 3.635V |

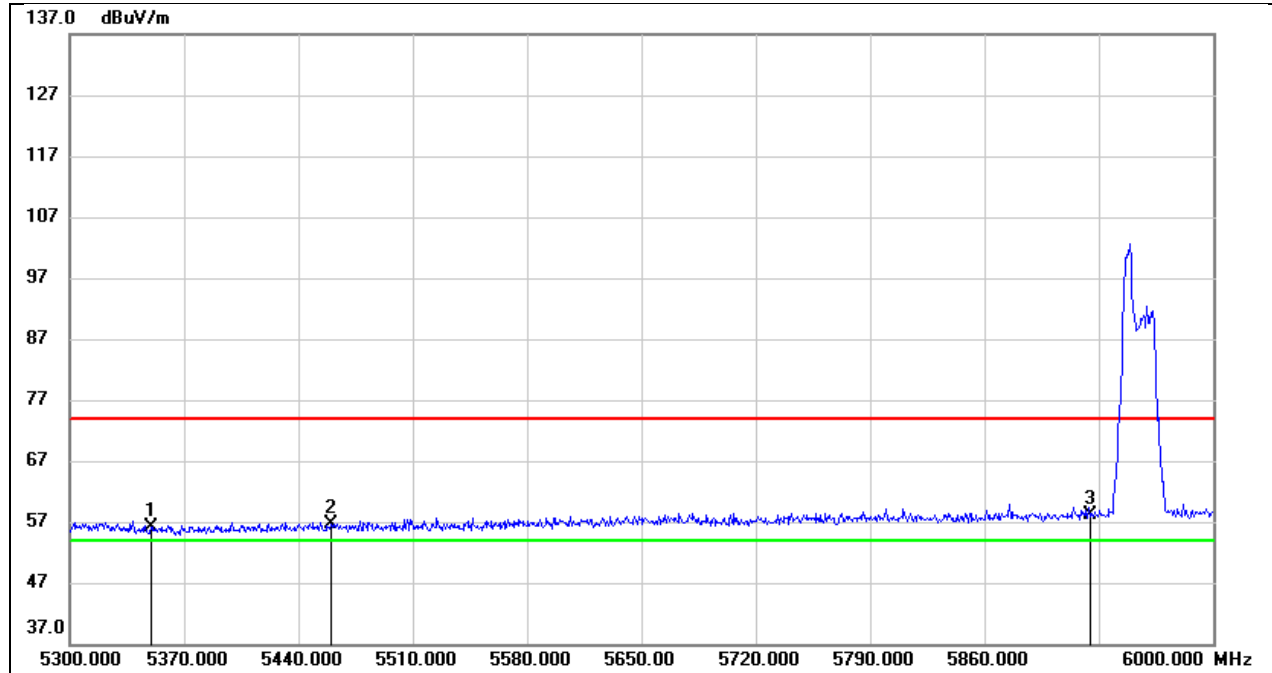


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 5350.000           | 16.78             | 39.25             | 56.03              | 74.00             | -17.97         | peak   |
| 2   | 5460.000           | 17.25             | 39.48             | 56.73              | 74.00             | -17.27         | peak   |
| 3   | 5925.000           | 17.95             | 40.28             | 58.23              | 74.00             | -15.77         | peak   |

|            |                                 |                 |           |
|------------|---------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone52 RU37 AV | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                      | Test Voltage:   | DC 3.635V |

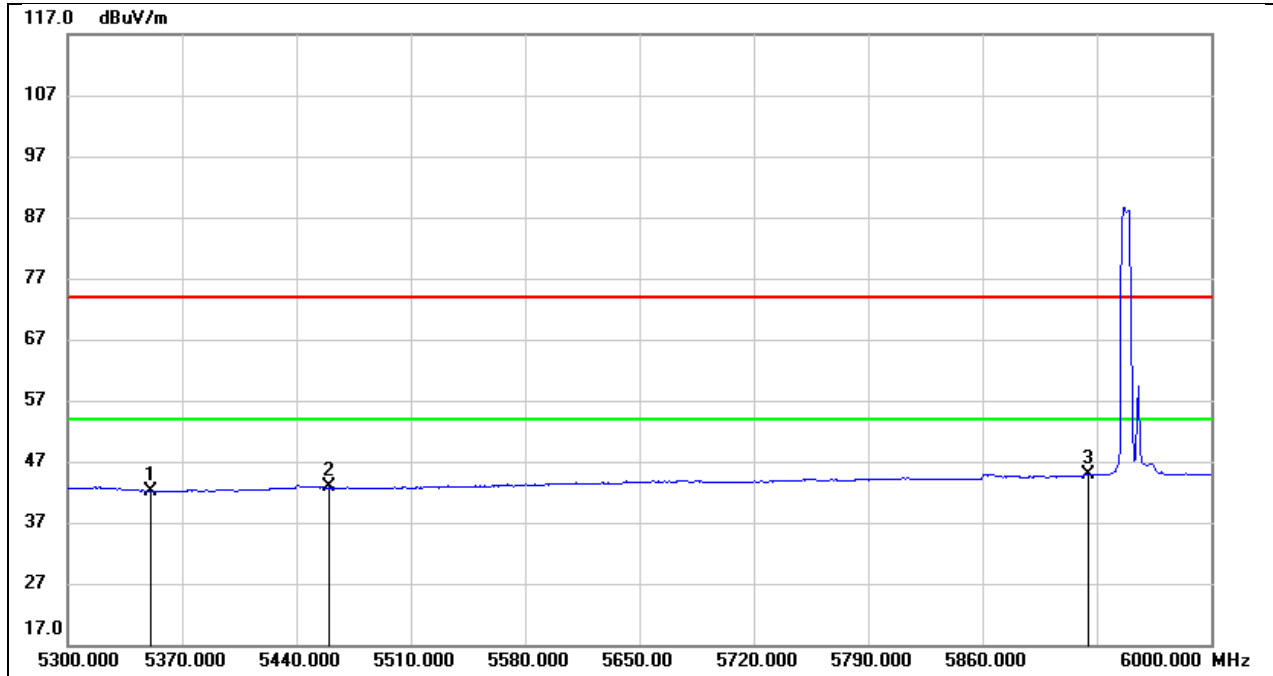


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 2.97           | 39.25          | 42.22           | 54.00          | -11.78      | AVG    |
| 2   | 5460.000        | 3.34           | 39.48          | 42.82           | 54.00          | -11.18      | AVG    |
| 3   | 5925.000        | 4.55           | 40.28          | 44.83           | 54.00          | -9.17       | AVG    |

|            |                                  |                 |           |
|------------|----------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone106 RU53 PK | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                       | Test Voltage:   | DC 3.635V |

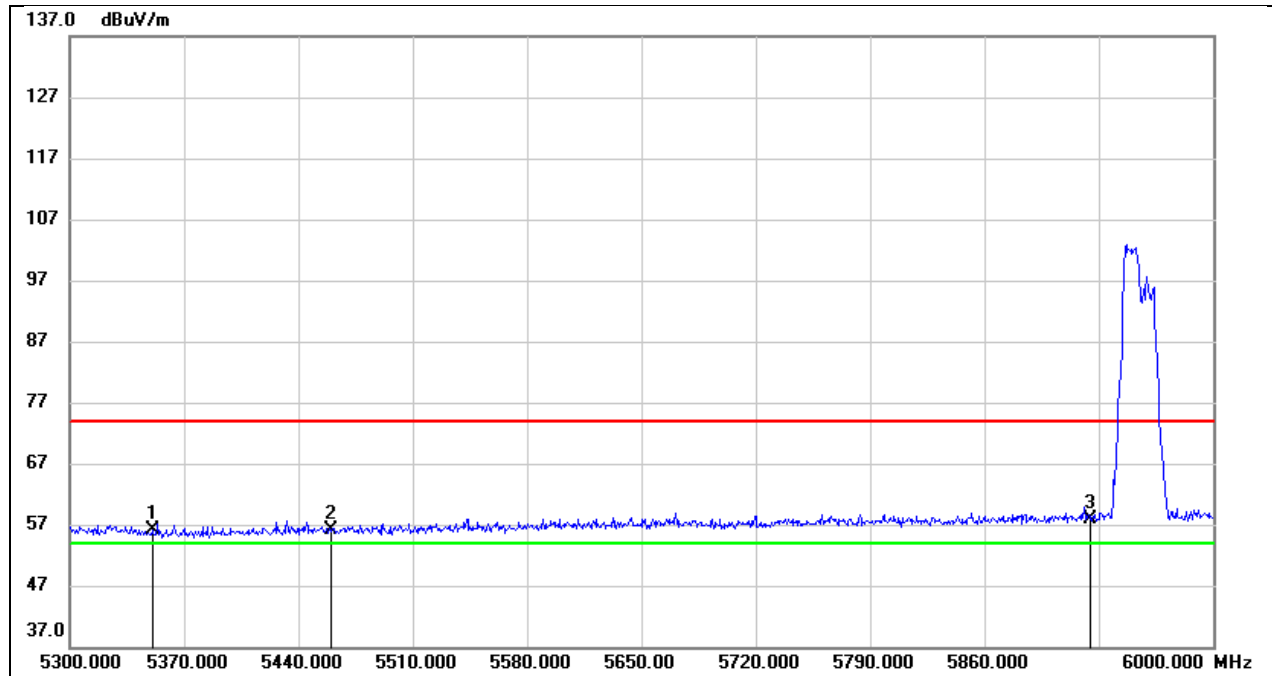


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 5350.000           | 16.79             | 39.25             | 56.04              | 74.00             | -17.96         | peak   |
| 2   | 5460.000           | 16.61             | 39.48             | 56.09              | 74.00             | -17.91         | peak   |
| 3   | 5925.000           | 17.56             | 40.28             | 57.84              | 74.00             | -16.16         | peak   |

|            |                                  |                 |           |
|------------|----------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone106 RU53 AV | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                       | Test Voltage:   | DC 3.635V |

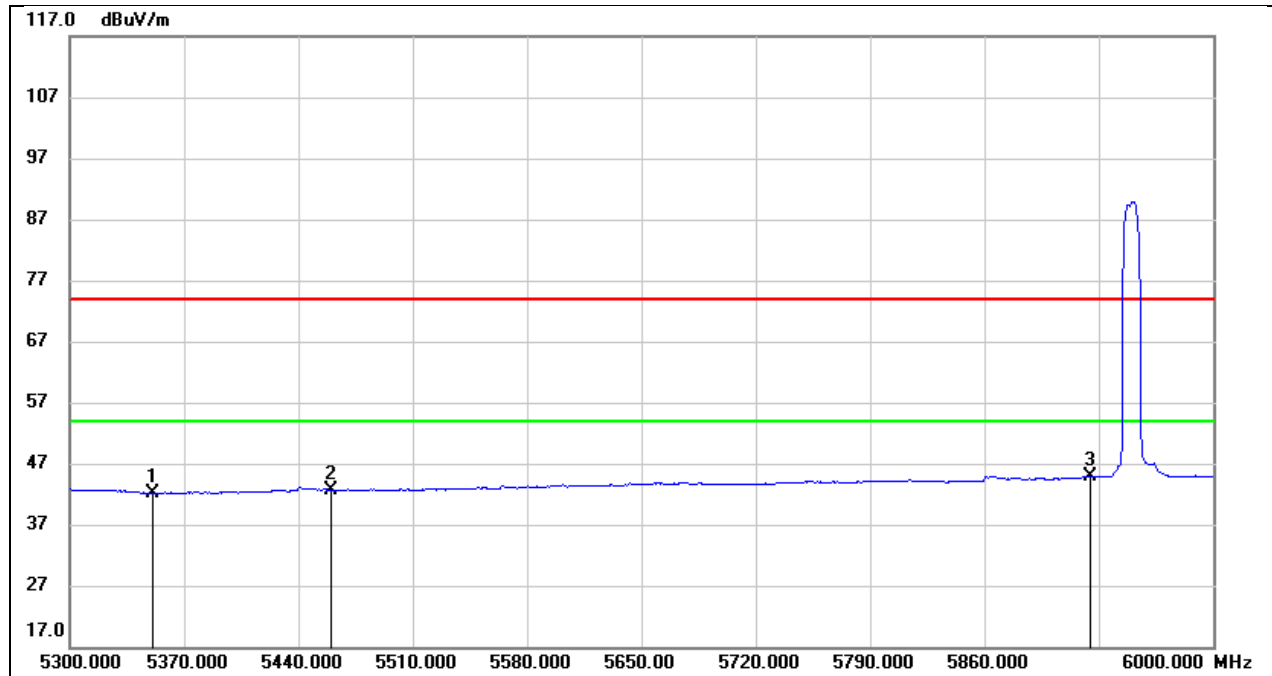


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 5350.000           | 2.97              | 39.25             | 42.22              | 54.00             | -11.78         | AVG    |
| 2   | 5460.000           | 3.15              | 39.48             | 42.63              | 54.00             | -11.37         | AVG    |
| 3   | 5925.000           | 4.48              | 40.28             | 44.76              | 54.00             | -9.24          | AVG    |

|            |                                |                 |           |
|------------|--------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 PK | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                     | Test Voltage:   | DC 3.635V |

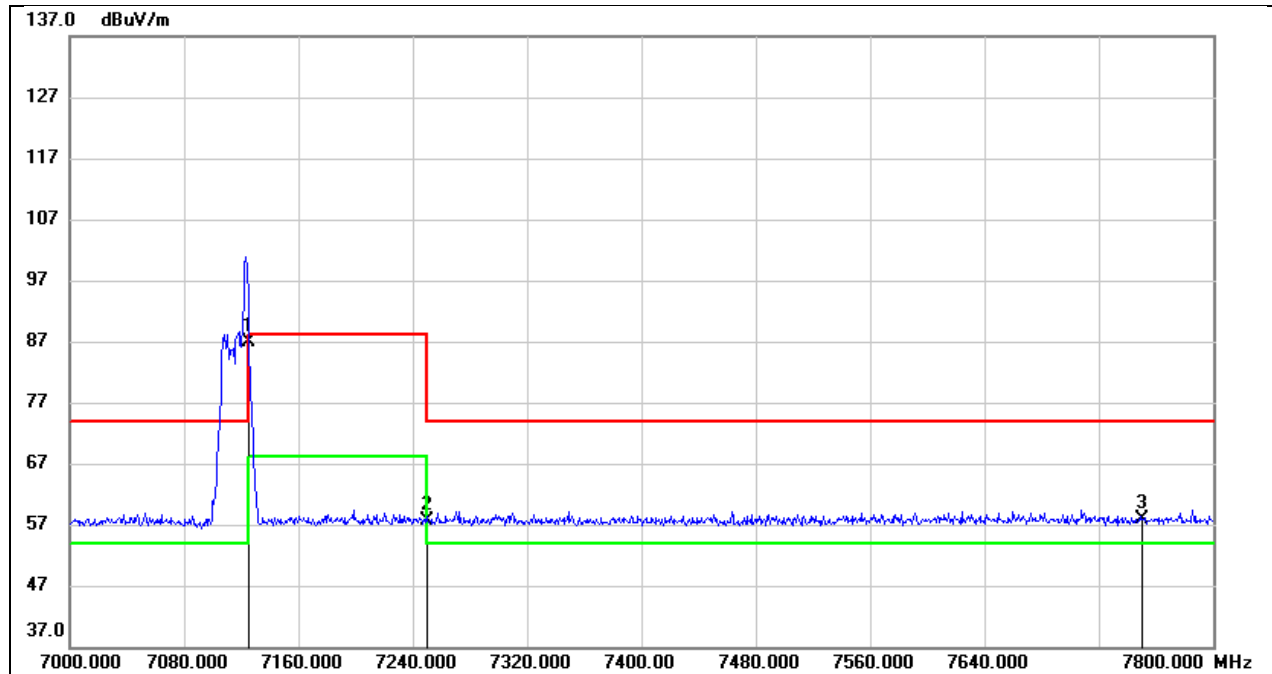


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 7125.000           | 43.37             | 43.53             | 86.90              | 88.20             | -1.30          | peak   |
| 2   | 7250.000           | 13.91             | 43.69             | 57.60              | 74.00             | -16.40         | peak   |
| 3   | 7750.000           | 13.91             | 44.07             | 57.98              | 74.00             | -16.02         | peak   |

|            |                                |                 |           |
|------------|--------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 AV | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                     | Test Voltage:   | DC 3.635V |

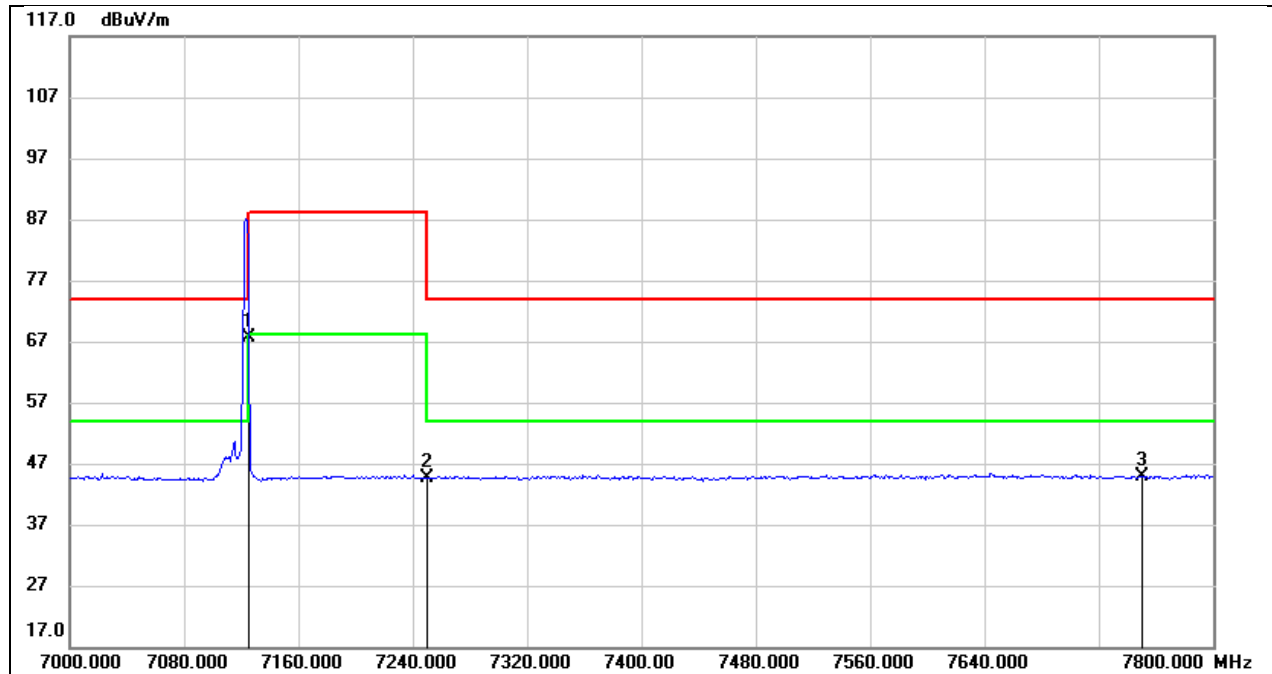


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 7125.000           | 24.19             | 43.53             | 67.72              | 68.20             | -0.48          | AVG    |
| 2   | 7250.000           | 1.05              | 43.69             | 44.74              | 54.00             | -9.26          | AVG    |
| 3   | 7750.000           | 0.76              | 44.07             | 44.83              | 54.00             | -9.17          | AVG    |

|            |                                 |                 |           |
|------------|---------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone52 RU40 PK | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                      | Test Voltage:   | DC 3.635V |

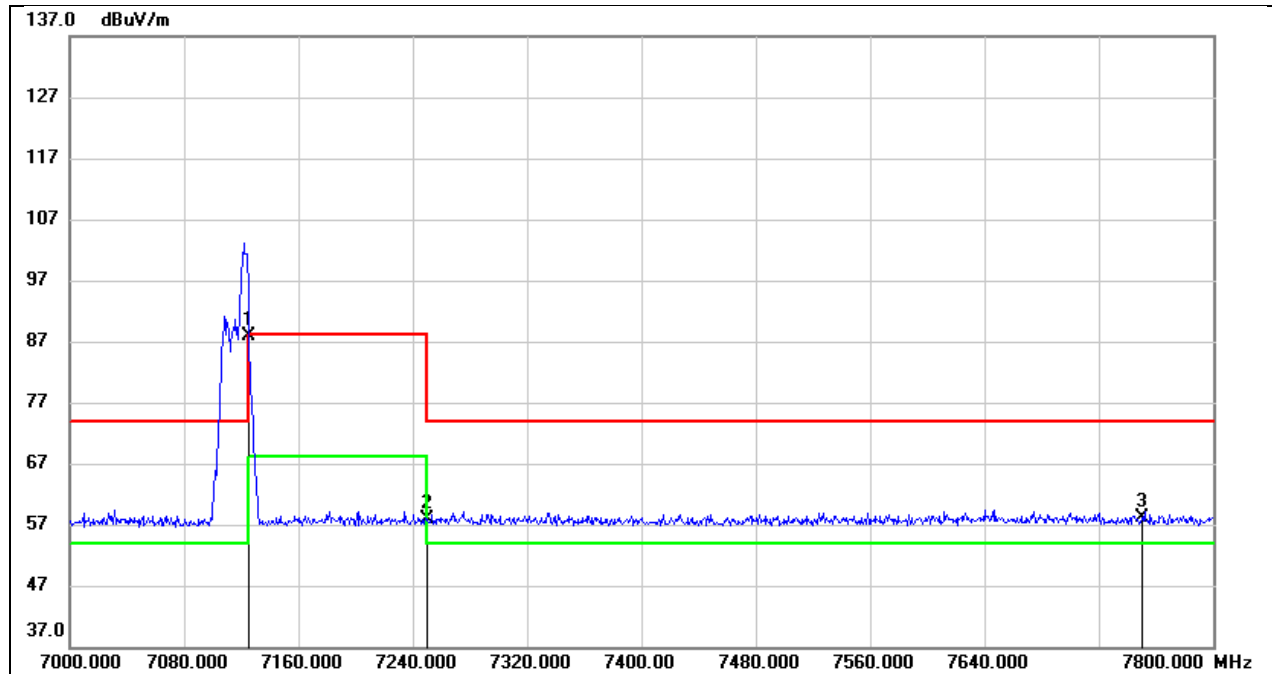


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 7125.000           | 44.40             | 43.53             | 87.93              | 88.20             | -0.27          | peak   |
| 2   | 7250.000           | 14.09             | 43.69             | 57.78              | 74.00             | -16.22         | peak   |
| 3   | 7750.000           | 13.99             | 44.07             | 58.06              | 74.00             | -15.94         | peak   |

|            |                                 |                 |           |
|------------|---------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone52 RU40 AV | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                      | Test Voltage:   | DC 3.635V |

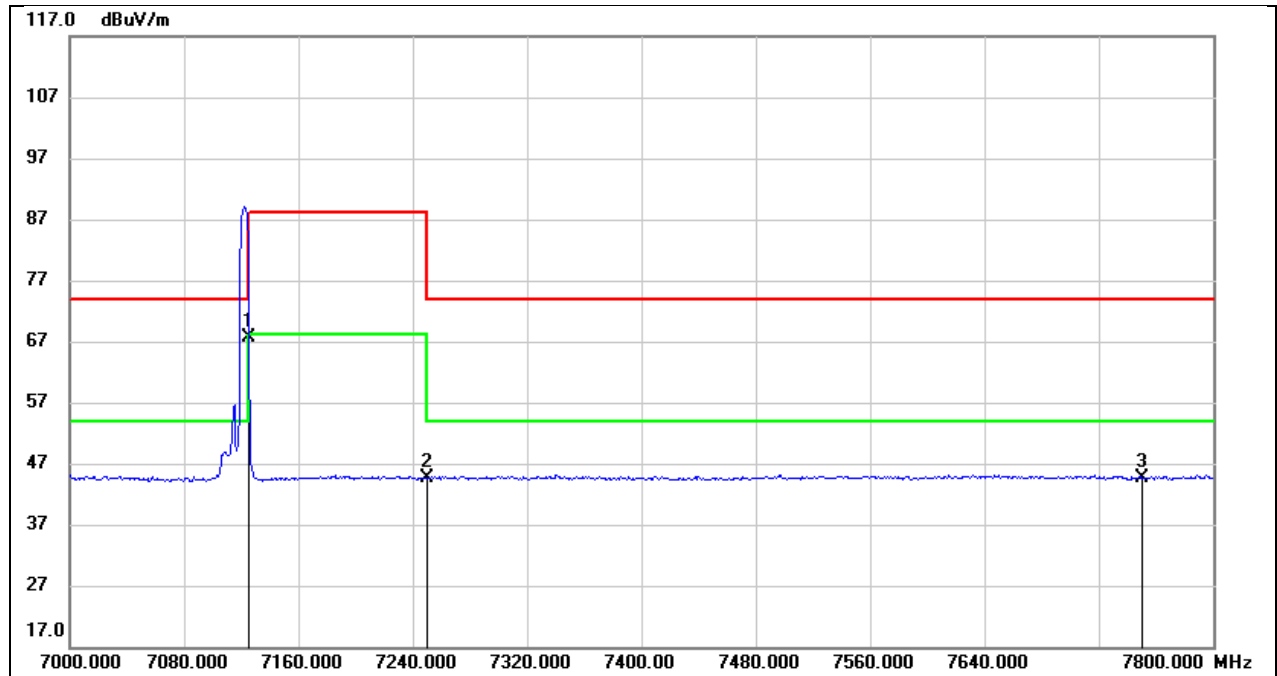


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 7125.000           | 24.04             | 43.53             | 67.57              | 68.20             | -0.63          | AVG    |
| 2   | 7250.000           | 0.96              | 43.69             | 44.65              | 54.00             | -9.35          | AVG    |
| 3   | 7750.000           | 0.60              | 44.07             | 44.67              | 54.00             | -9.33          | AVG    |

|            |                                  |                 |           |
|------------|----------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone106 RU54 PK | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                       | Test Voltage:   | DC 3.635V |

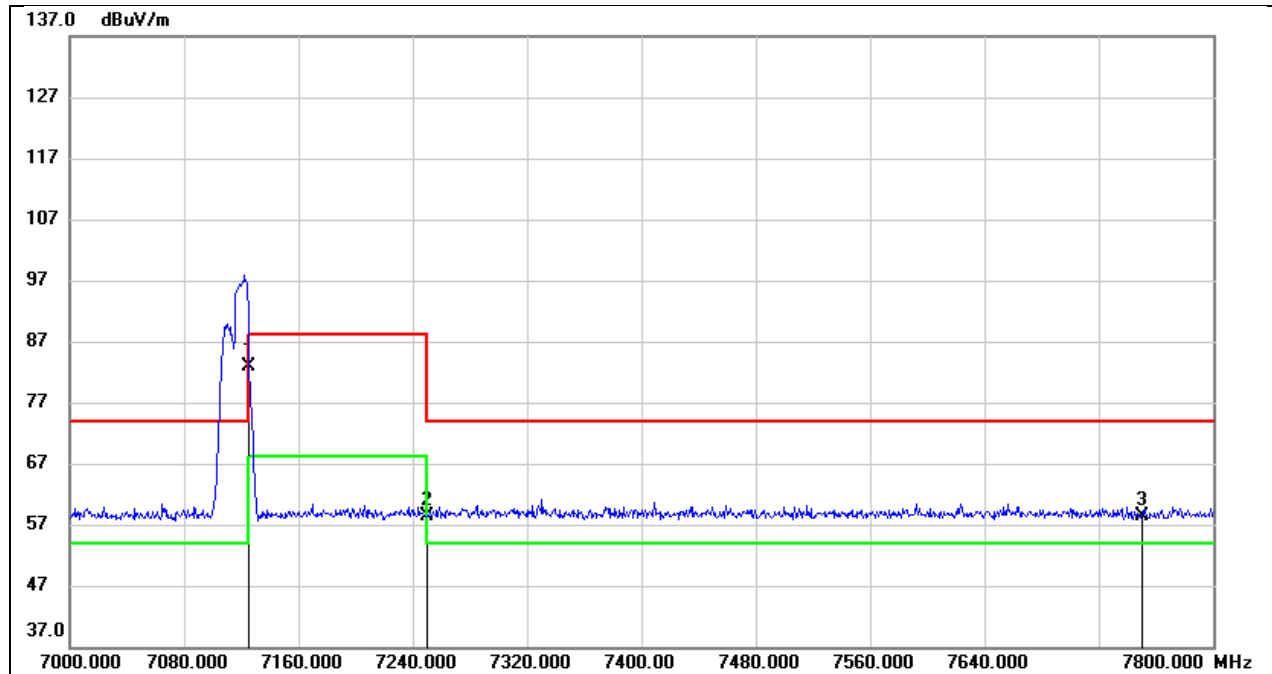

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 7125.000           | 39.26             | 43.53             | 82.79              | 88.20             | -5.41          | peak   |
| 2   | 7250.000           | 14.81             | 43.69             | 58.50              | 74.00             | -15.50         | peak   |
| 3   | 7750.000           | 14.32             | 44.07             | 58.39              | 74.00             | -15.61         | peak   |

|            |                                  |                 |           |
|------------|----------------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone106 RU54 AV | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                       | Test Voltage:   | DC 3.635V |

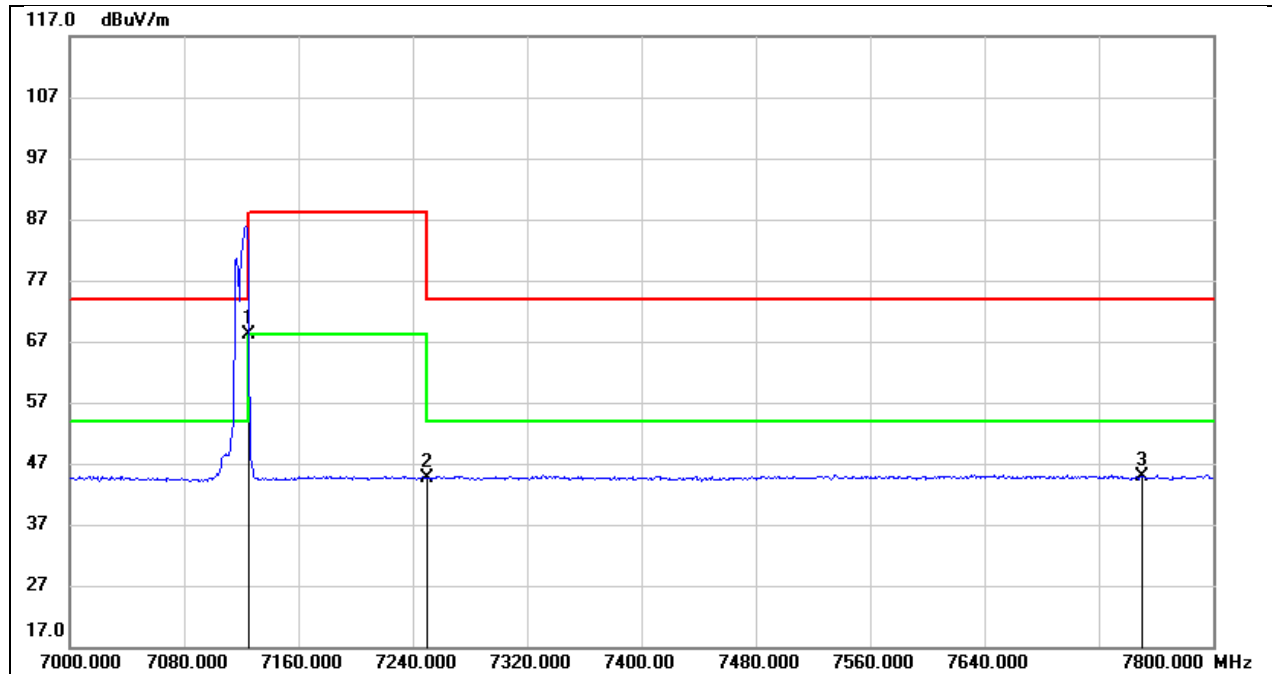


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 7125.000        | 24.56          | 43.53          | 68.09           | 68.20          | -0.11       | AVG    |
| 2   | 7250.000        | 1.01           | 43.69          | 44.70           | 54.00          | -9.30       | AVG    |
| 3   | 7750.000        | 0.82           | 44.07          | 44.89           | 54.00          | -9.11       | AVG    |

Note: Indoor Client and Standard Power Client have been tested, only the worst data of Indoor Client-UNII-6/-8 and Standard Power Client-UNII-5/-7 were recorded in the report.


### 8.3. SPURIOUS EMISSIONS(1 GHZ~9 GHZ)

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

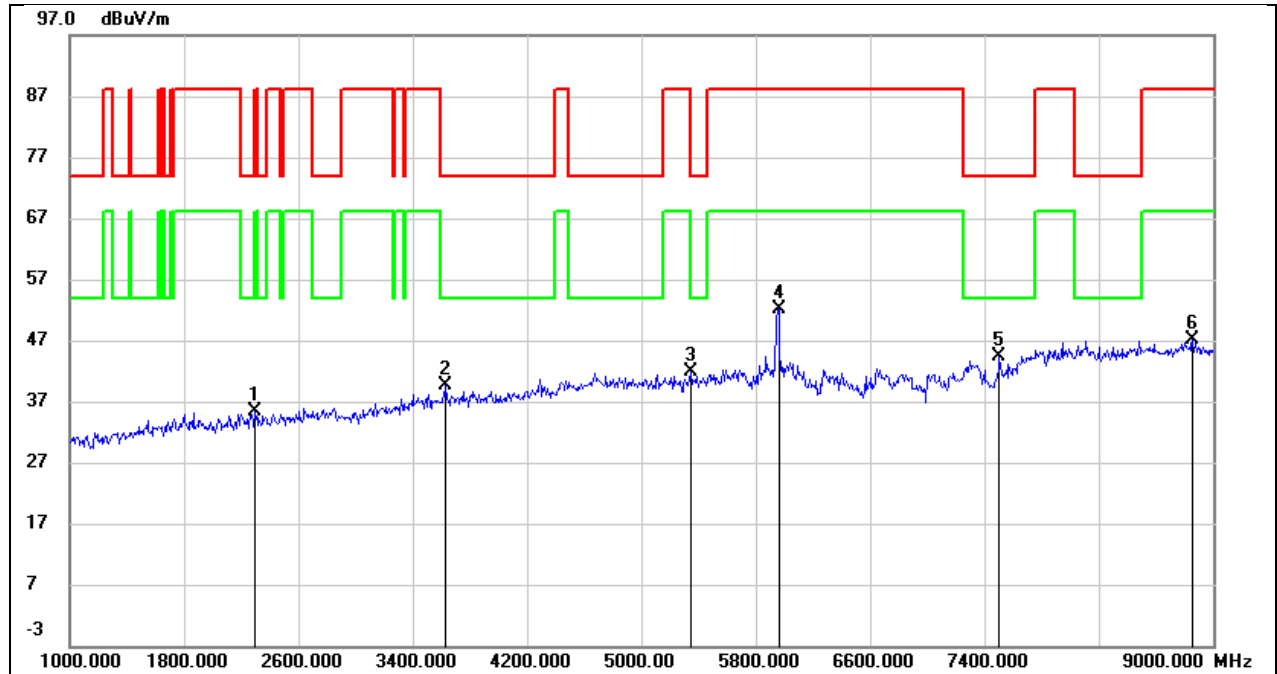


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2296.000        | 44.36          | -9.06          | 35.30           | 74.00          | -38.70      | peak        |
| 2   | 3632.000        | 42.80          | -3.24          | 39.56           | 74.00          | -34.44      | peak        |
| 3   | 5344.000        | 39.28          | 2.64           | 41.92           | 88.20          | -46.28      | peak        |
| 4   | 5955.000        | 46.95          | 5.21           | 52.16           | /              | /           | fundamental |
| 5   | 7504.000        | 37.20          | 7.11           | 44.31           | 74.00          | -29.69      | peak        |
| 6   | 8856.000        | 37.50          | 9.69           | 47.19           | 88.20          | -41.01      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

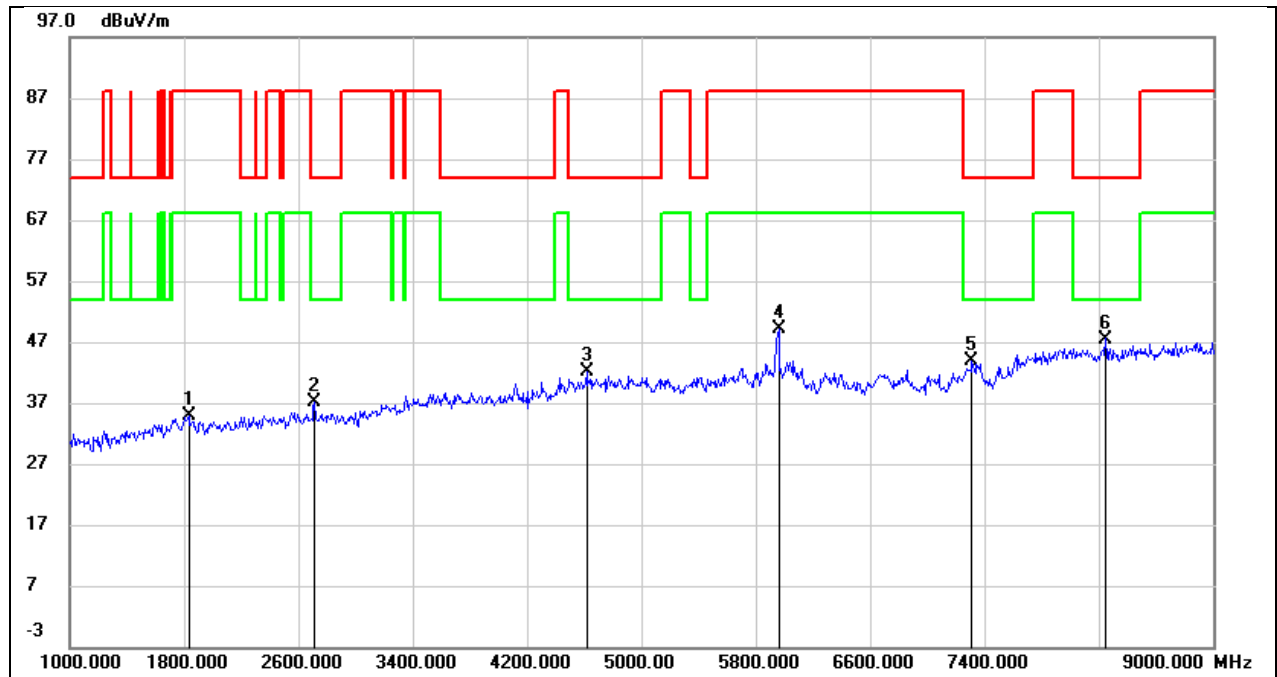


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1832.000        | 45.01          | -10.11         | 34.90           | 88.20          | -53.30      | peak        |
| 2   | 2712.000        | 44.55          | -7.37          | 37.18           | 74.00          | -36.82      | peak        |
| 3   | 4616.000        | 42.00          | 0.25           | 42.25           | 74.00          | -31.75      | peak        |
| 4   | 5955.000        | 44.00          | 5.21           | 49.21           | /              | /           | fundamental |
| 5   | 7312.000        | 37.05          | 6.85           | 43.90           | 74.00          | -30.10      | peak        |
| 6   | 8248.000        | 38.79          | 8.71           | 47.50           | 74.00          | -26.50      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6175      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

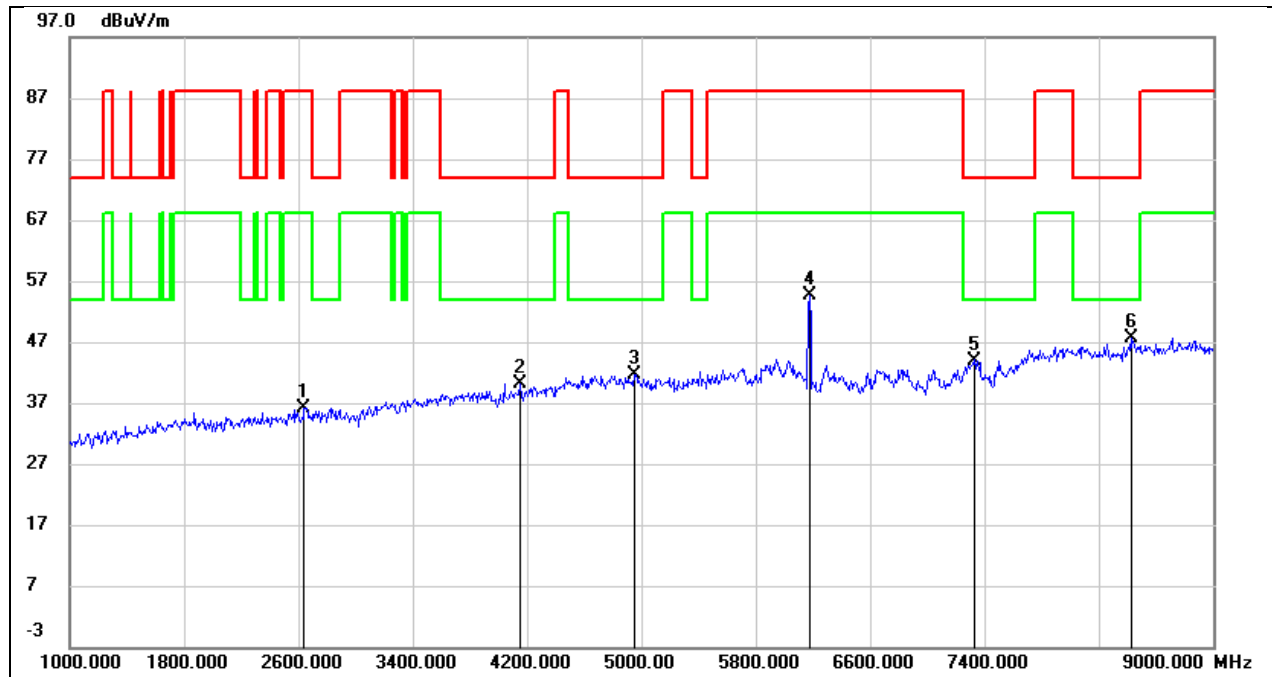


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2640.000        | 43.81          | -7.65          | 36.16           | 88.20          | -52.04      | peak        |
| 2   | 4152.000        | 42.03          | -1.90          | 40.13           | 74.00          | -33.87      | peak        |
| 3   | 4952.000        | 39.89          | 1.67           | 41.56           | 74.00          | -32.44      | peak        |
| 4   | 6175.000        | 48.53          | 6.16           | 54.69           | /              | /           | fundamental |
| 5   | 7328.000        | 37.13          | 6.87           | 44.00           | 74.00          | -30.00      | peak        |
| 6   | 8424.000        | 38.73          | 8.90           | 47.63           | 74.00          | -26.37      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6175      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

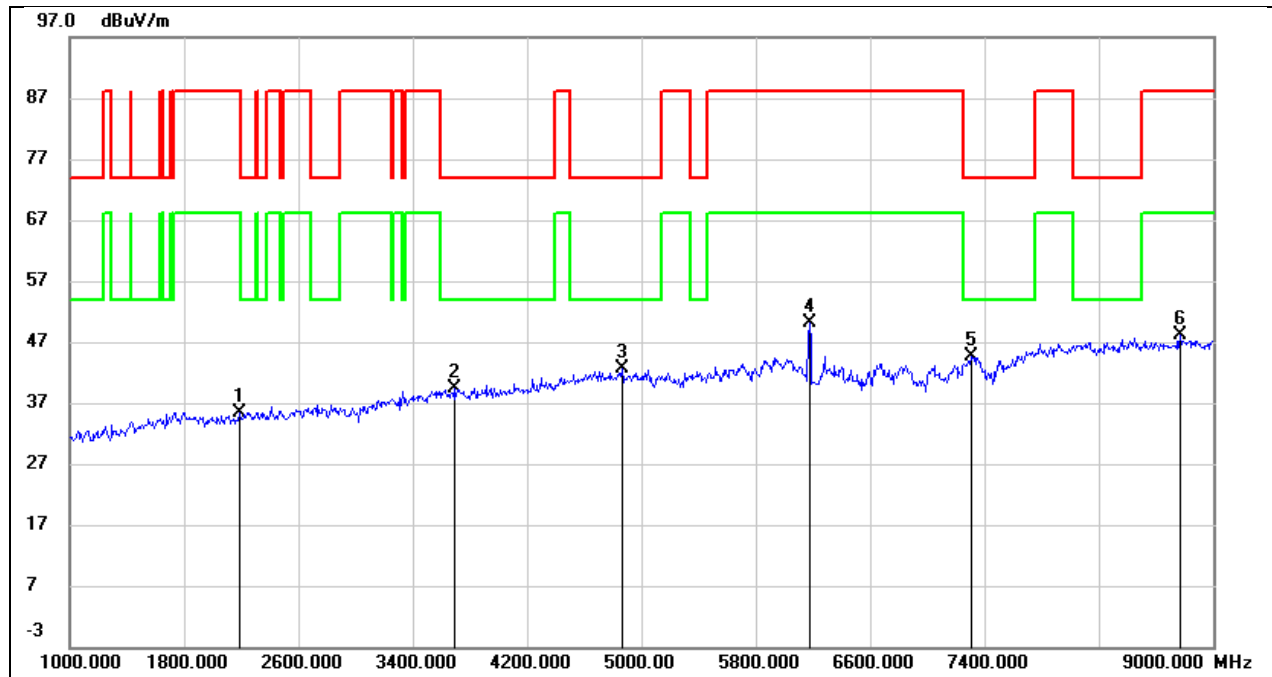


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2192.000        | 44.98          | -9.49          | 35.49           | 88.20          | -52.71      | peak        |
| 2   | 3696.000        | 42.45          | -3.10          | 39.35           | 74.00          | -34.65      | peak        |
| 3   | 4864.000        | 41.26          | 1.27           | 42.53           | 74.00          | -31.47      | peak        |
| 4   | 6175.000        | 44.08          | 6.16           | 50.24           | /              | /           | fundamental |
| 5   | 7304.000        | 37.91          | 6.84           | 44.75           | 74.00          | -29.25      | peak        |
| 6   | 8768.000        | 38.58          | 9.50           | 48.08           | 88.20          | -40.12      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6415      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

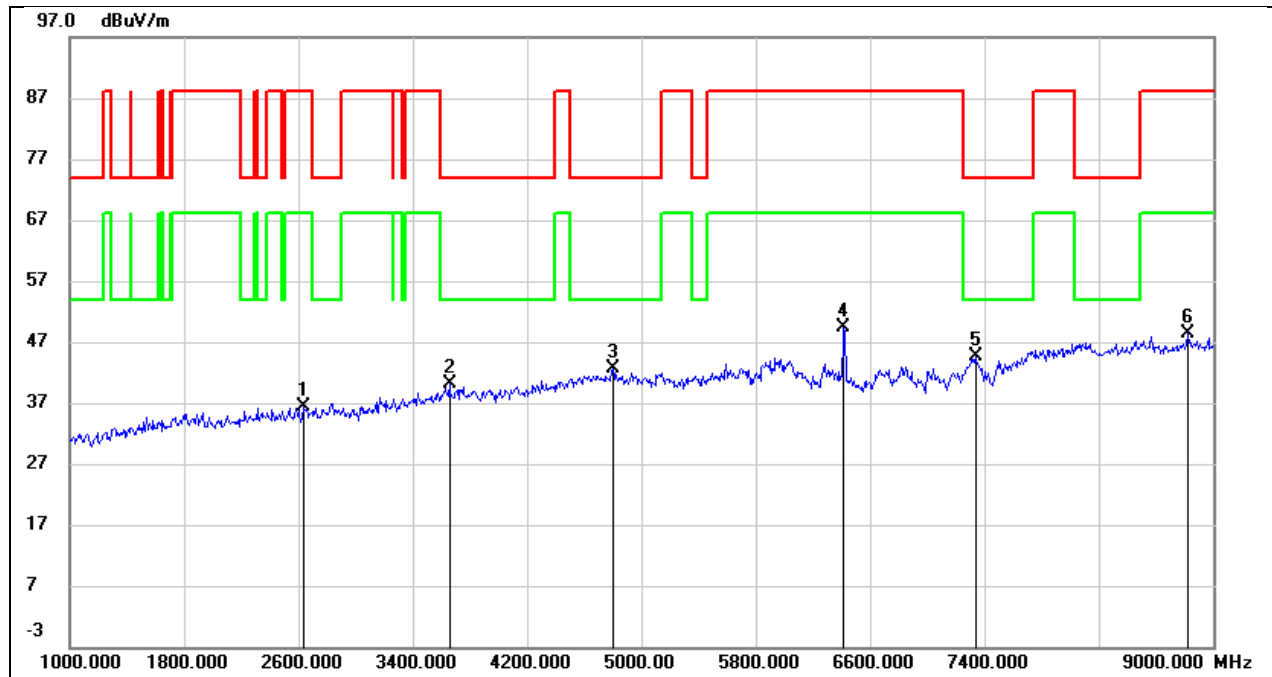


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2640.000        | 44.09          | -7.65          | 36.44           | 88.20          | -51.76      | peak        |
| 2   | 3656.000        | 43.21          | -3.18          | 40.03           | 74.00          | -33.97      | peak        |
| 3   | 4800.000        | 41.70          | 0.97           | 42.67           | 74.00          | -31.33      | peak        |
| 4   | 6415.000        | 43.59          | 5.78           | 49.37           | /              | /           | fundamental |
| 5   | 7336.000        | 37.72          | 6.87           | 44.59           | 74.00          | -29.41      | peak        |
| 6   | 8824.000        | 38.89          | 9.60           | 48.49           | 88.20          | -39.71      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6415      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

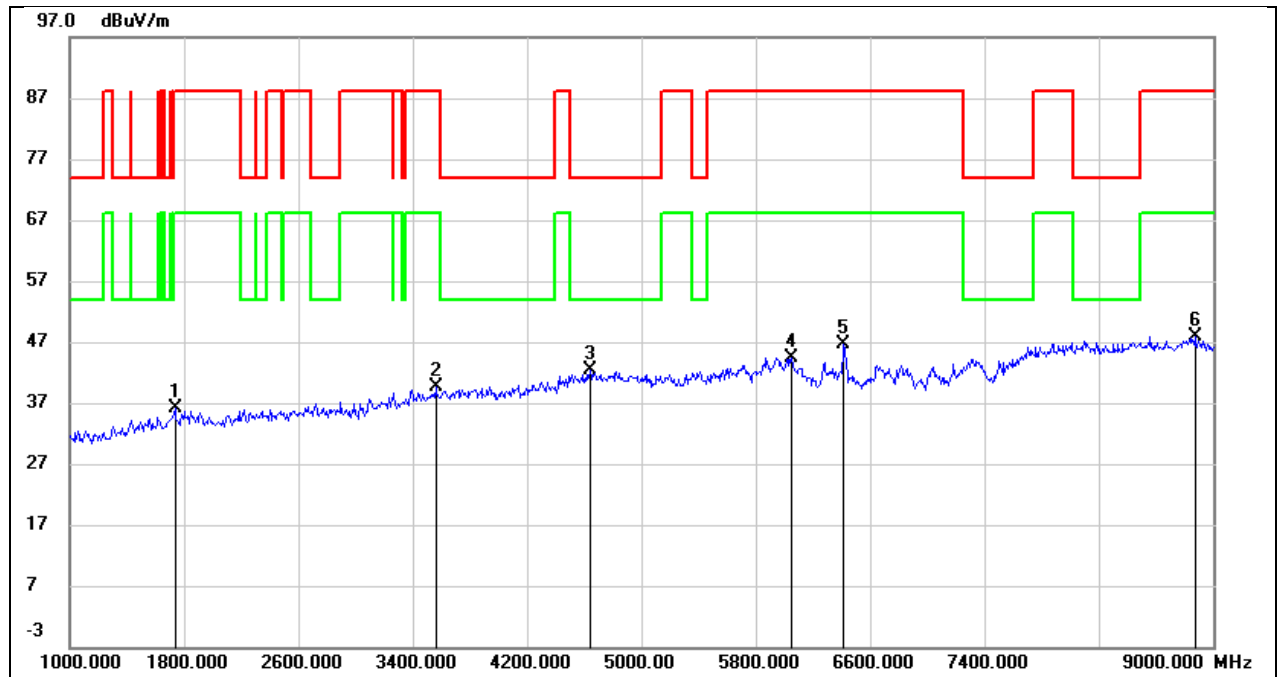


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1736.000        | 46.61          | -10.51         | 36.10           | 88.20          | -52.10      | peak        |
| 2   | 3560.000        | 43.05          | -3.49          | 39.56           | 88.20          | -48.64      | peak        |
| 3   | 4640.000        | 42.13          | 0.33           | 42.46           | 74.00          | -31.54      | peak        |
| 4   | 6048.000        | 38.77          | 5.64           | 44.41           | 88.20          | -43.79      | peak        |
| 5   | 6415.000        | 40.89          | 5.78           | 46.67           | /              | /           | fundamental |
| 6   | 8872.000        | 38.05          | 9.73           | 47.78           | 88.20          | -40.42      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6435      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

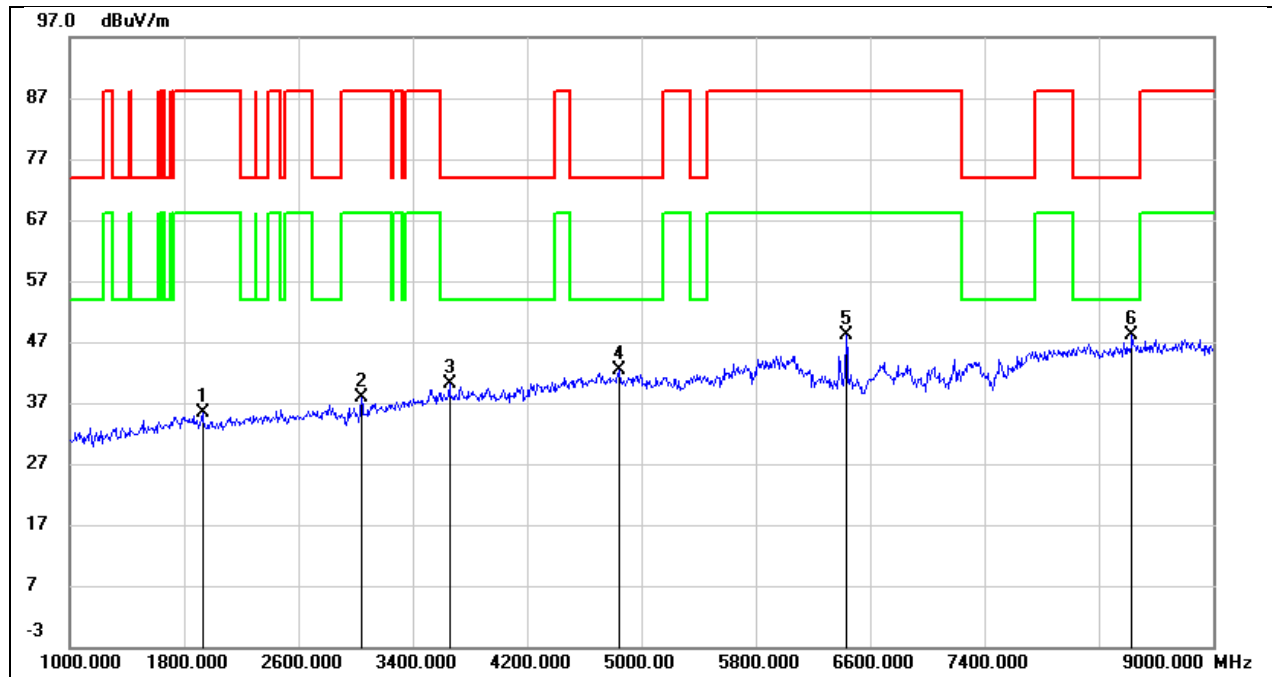


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1928.000        | 45.64          | -10.22         | 35.42           | 88.20          | -52.78      | peak        |
| 2   | 3040.000        | 43.78          | -6.01          | 37.77           | 88.20          | -50.43      | peak        |
| 3   | 3656.000        | 43.21          | -3.18          | 40.03           | 74.00          | -33.97      | peak        |
| 4   | 4848.000        | 41.12          | 1.20           | 42.32           | 74.00          | -31.68      | peak        |
| 5   | 6435.000        | 42.30          | 5.82           | 48.12           | /              | /           | fundamental |
| 6   | 8432.000        | 39.13          | 8.91           | 48.04           | 74.00          | -25.96      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6435      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

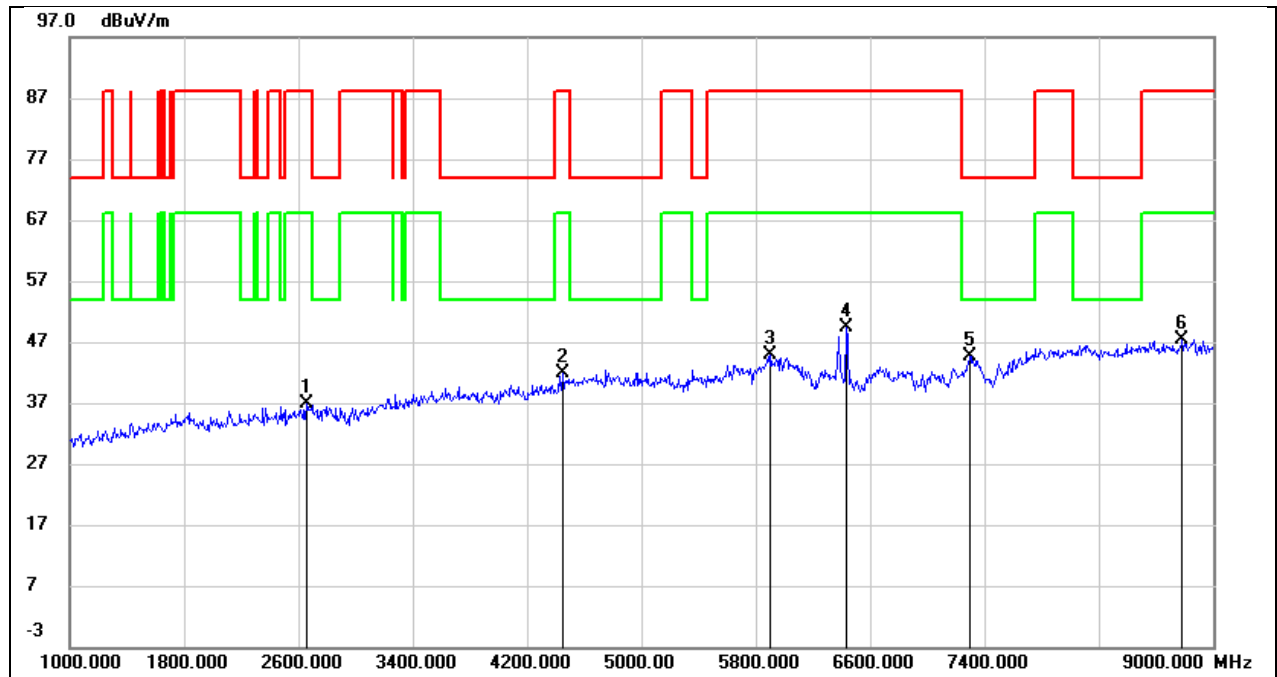


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2656.000        | 44.38          | -7.59          | 36.79           | 88.20          | -51.41      | peak        |
| 2   | 4448.000        | 42.64          | -0.66          | 41.98           | 88.20          | -46.22      | peak        |
| 3   | 5904.000        | 40.02          | 4.92           | 44.94           | 88.20          | -43.26      | peak        |
| 4   | 6435.000        | 43.60          | 5.82           | 49.42           | /              | /           | fundamental |
| 5   | 7296.000        | 37.69          | 6.84           | 44.53           | 74.00          | -29.47      | peak        |
| 6   | 8784.000        | 37.94          | 9.51           | 47.45           | 88.20          | -40.75      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6475      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

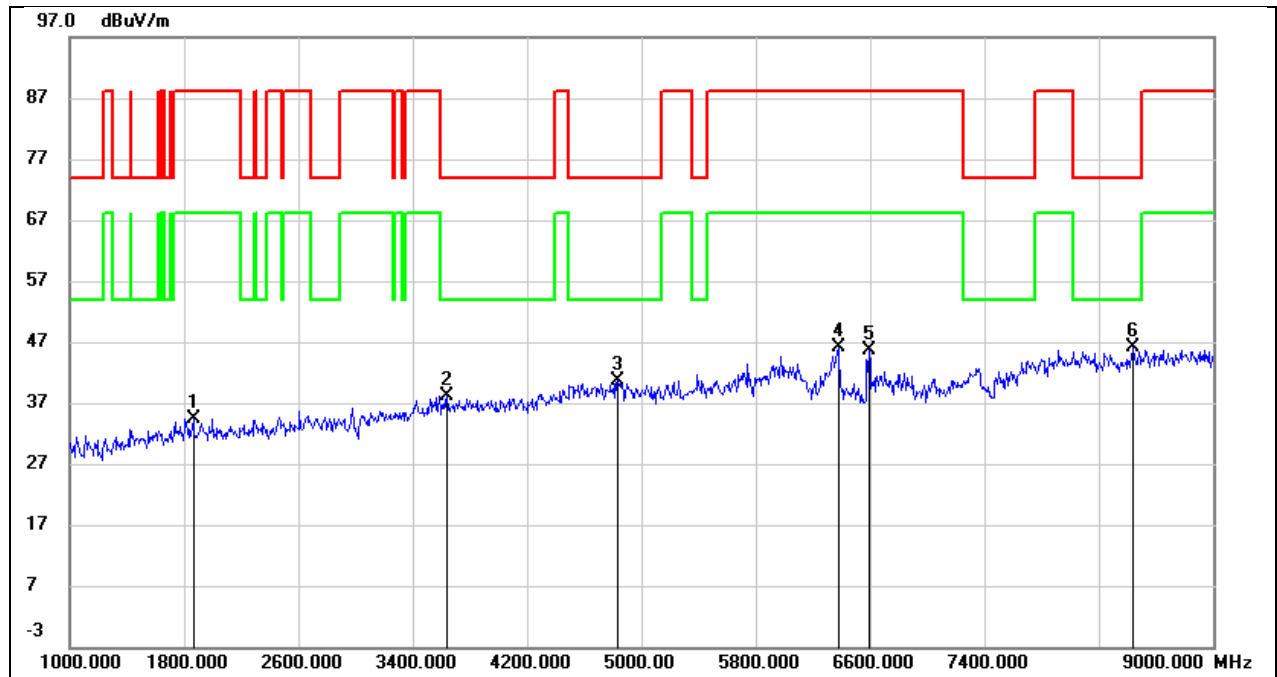


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 1864.000        | 44.54          | -10.15         | 34.39           | 88.20          | -53.81      | peak   |
| 2   | 3640.000        | 41.45          | -3.23          | 38.22           | 74.00          | -35.78      | peak   |
| 3   | 4832.000        | 39.60          | 1.12           | 40.72           | 74.00          | -33.28      | peak   |
| 4   | 6376.000        | 40.23          | 5.81           | 46.04           | 88.20          | -42.16      | peak   |
| 5   | 6592.000        | 39.53          | 6.10           | 45.63           | 88.20          | -42.57      | peak   |
| 6   | 8440.000        | 37.27          | 8.91           | 46.18           | 74.00          | -27.82      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6475      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

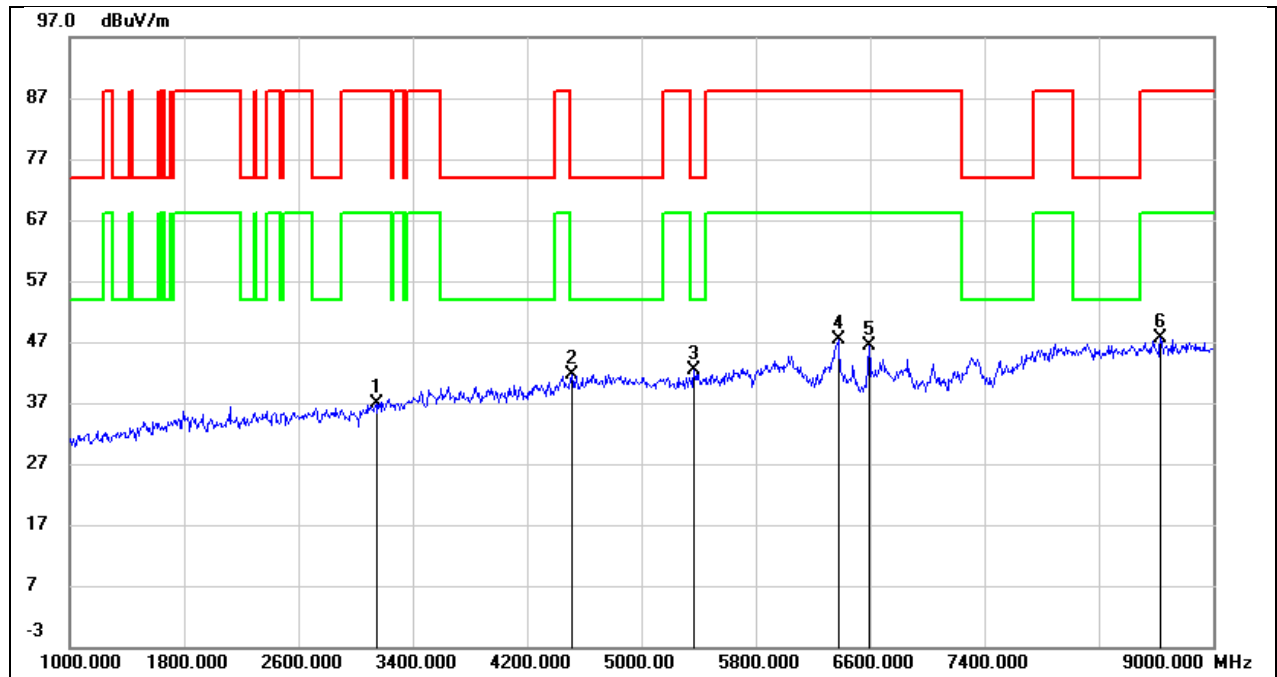


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 3144.000        | 42.32          | -5.48          | 36.84           | 88.20          | -51.36      | peak   |
| 2   | 4512.000        | 41.92          | -0.27          | 41.65           | 74.00          | -32.35      | peak   |
| 3   | 5368.000        | 39.71          | 2.72           | 42.43           | 74.00          | -31.57      | peak   |
| 4   | 6376.000        | 41.61          | 5.81           | 47.42           | 88.20          | -40.78      | peak   |
| 5   | 6592.000        | 40.31          | 6.10           | 46.41           | 88.20          | -41.79      | peak   |
| 6   | 8632.000        | 38.18          | 9.33           | 47.51           | 88.20          | -40.69      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6515      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

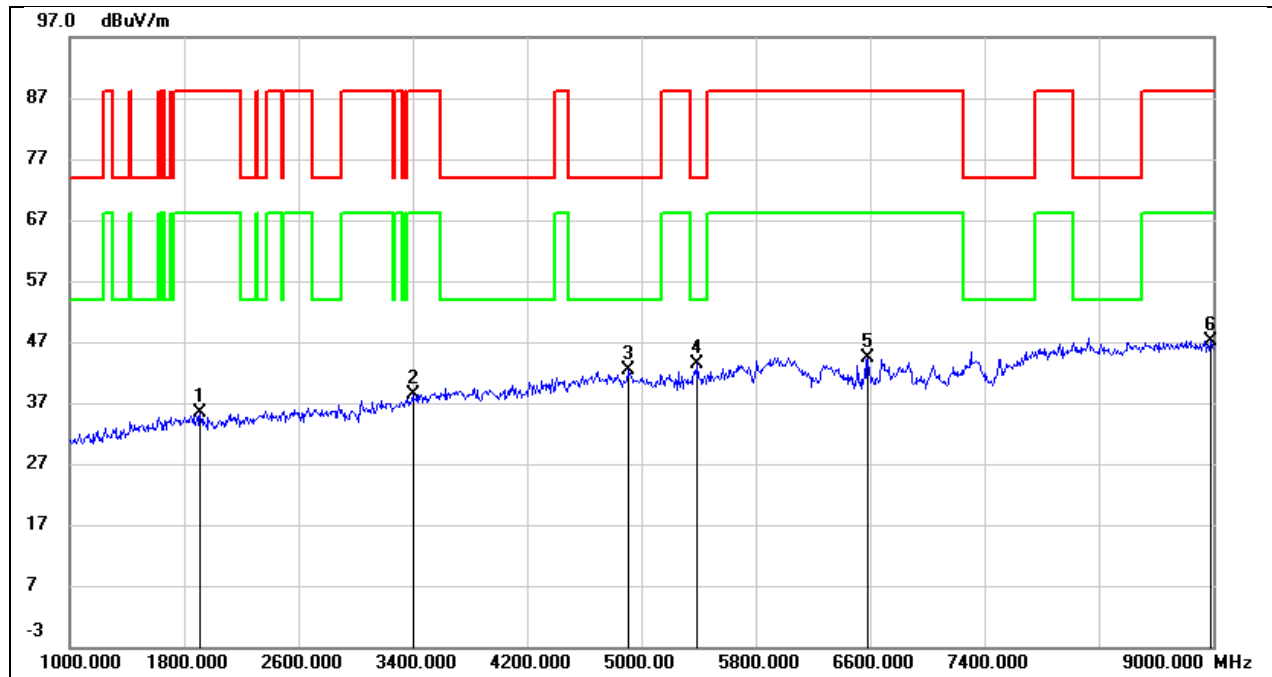


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 1912.000        | 45.49          | -10.21         | 35.28           | 88.20          | -52.92      | peak   |
| 2   | 3400.000        | 42.69          | -4.25          | 38.44           | 88.20          | -49.76      | peak   |
| 3   | 4904.000        | 40.82          | 1.46           | 42.28           | 74.00          | -31.72      | peak   |
| 4   | 5392.000        | 40.57          | 2.83           | 43.40           | 74.00          | -30.60      | peak   |
| 5   | 6584.000        | 38.20          | 6.08           | 44.28           | 88.20          | -43.92      | peak   |
| 6   | 8984.000        | 37.10          | 10.02          | 47.12           | 88.20          | -41.08      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6515      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

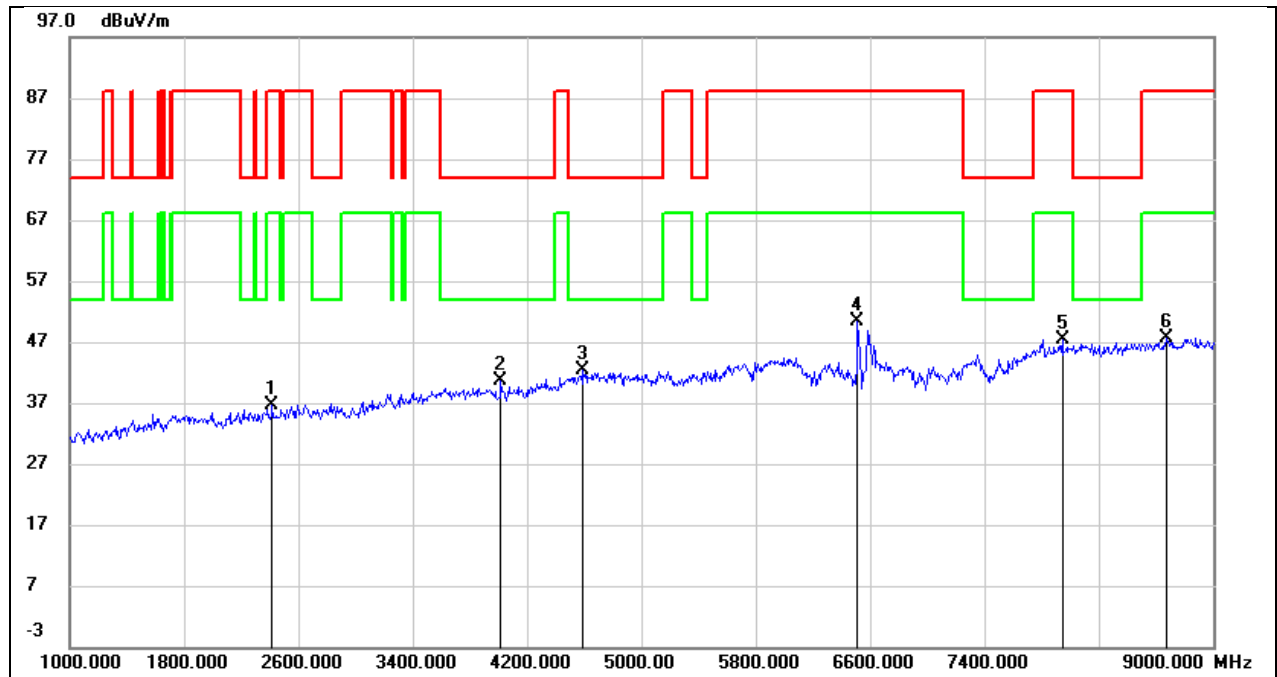


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2416.000        | 45.08          | -8.56          | 36.52           | 88.20          | -51.68      | peak        |
| 2   | 4016.000        | 43.03          | -2.44          | 40.59           | 74.00          | -33.41      | peak        |
| 3   | 4592.000        | 42.20          | 0.14           | 42.34           | 74.00          | -31.66      | peak        |
| 4   | 6515.000        | 44.51          | 5.97           | 50.48           | /              | /           | fundamental |
| 5   | 7944.000        | 39.08          | 8.32           | 47.40           | 88.20          | -40.80      | peak        |
| 6   | 8672.000        | 38.19          | 9.38           | 47.57           | 88.20          | -40.63      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6535      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

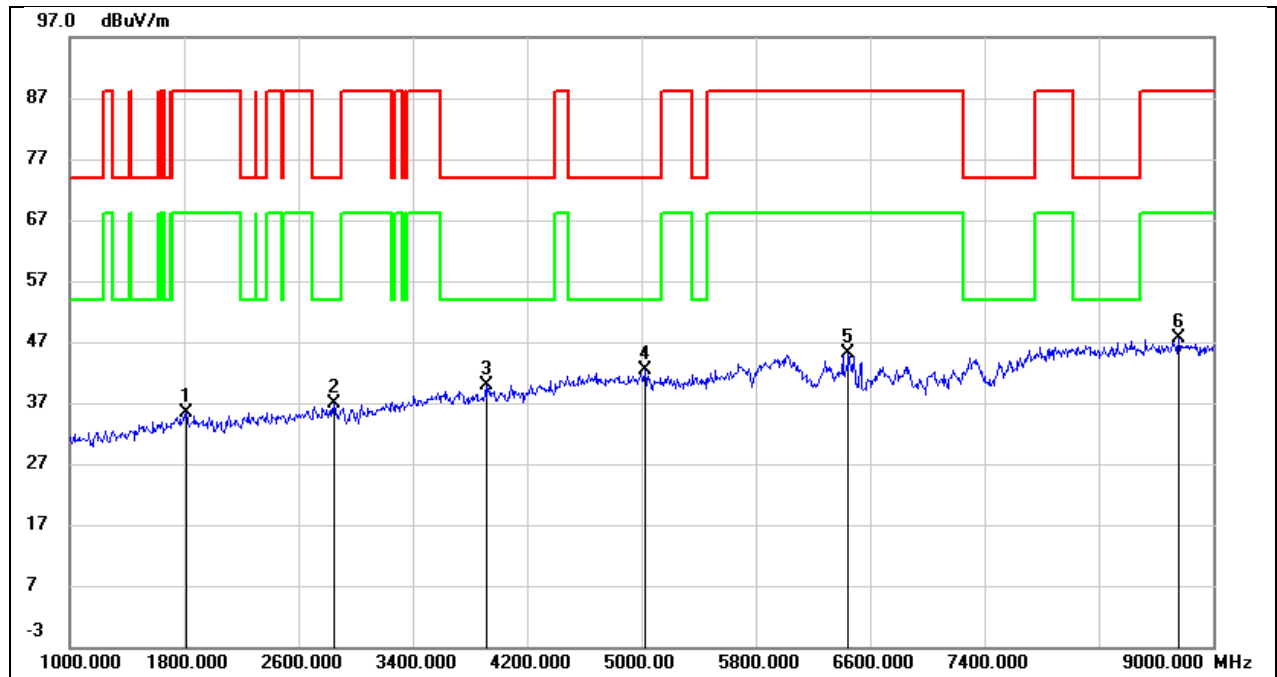


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 1816.000        | 45.40          | -10.10         | 35.30           | 88.20          | -52.90      | peak   |
| 2   | 2848.000        | 43.61          | -6.84          | 36.77           | 74.00          | -37.23      | peak   |
| 3   | 3912.000        | 42.57          | -2.66          | 39.91           | 74.00          | -34.09      | peak   |
| 4   | 5024.000        | 40.36          | 1.92           | 42.28           | 74.00          | -31.72      | peak   |
| 5   | 6448.000        | 39.23          | 5.85           | 45.08           | 88.20          | -43.12      | peak   |
| 6   | 8760.000        | 38.22          | 9.49           | 47.71           | 88.20          | -40.49      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6535      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

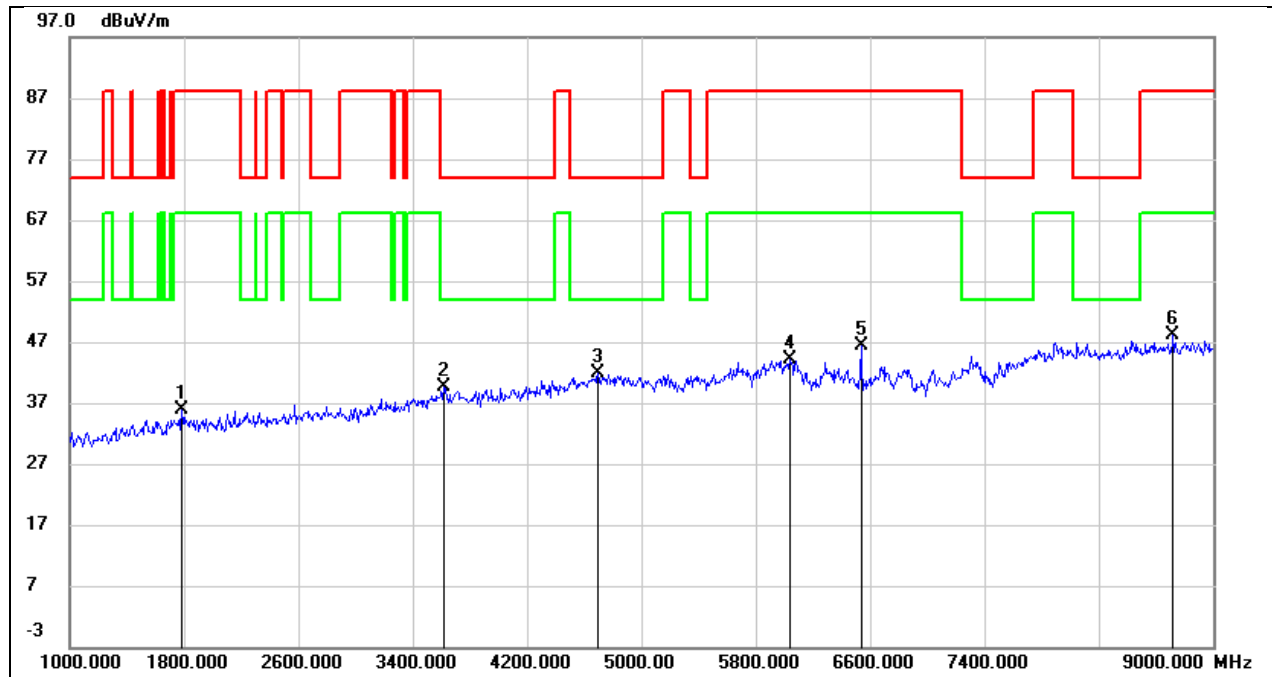


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1784.000        | 45.96          | -10.19         | 35.77           | 88.20          | -52.43      | peak        |
| 2   | 3616.000        | 42.81          | -3.27          | 39.54           | 74.00          | -34.46      | peak        |
| 3   | 4696.000        | 41.20          | 0.56           | 41.76           | 74.00          | -32.24      | peak        |
| 4   | 6040.000        | 38.52          | 5.60           | 44.12           | 88.20          | -44.08      | peak        |
| 5   | 6535.000        | 40.44          | 6.00           | 46.44           | /              | /           | fundamental |
| 6   | 8720.000        | 38.62          | 9.44           | 48.06           | 88.20          | -40.14      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6715      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

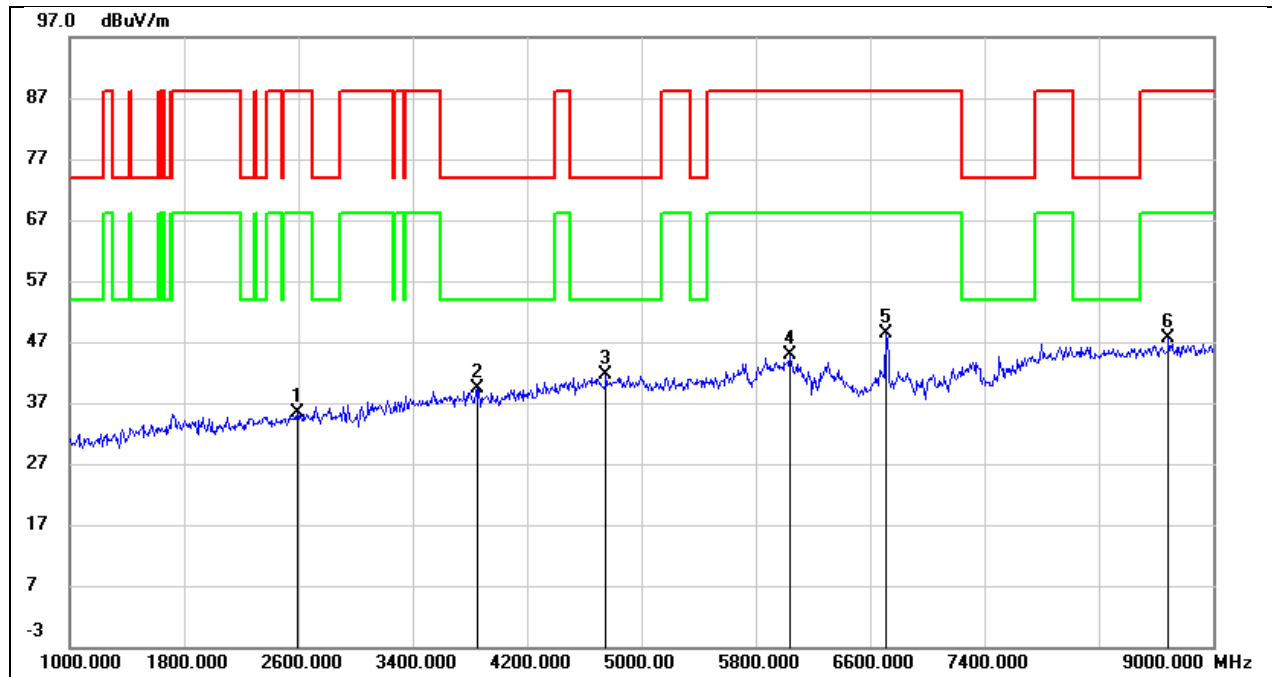


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2592.000        | 43.28          | -7.83          | 35.45           | 88.20          | -52.75      | peak        |
| 2   | 3848.000        | 42.15          | -2.78          | 39.37           | 74.00          | -34.63      | peak        |
| 3   | 4752.000        | 40.83          | 0.78           | 41.61           | 74.00          | -32.39      | peak        |
| 4   | 6040.000        | 39.26          | 5.60           | 44.86           | 88.20          | -43.34      | peak        |
| 5   | 6715.000        | 41.96          | 6.42           | 48.38           | /              | /           | fundamental |
| 6   | 8688.000        | 38.23          | 9.41           | 47.64           | 88.20          | -40.56      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6715      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

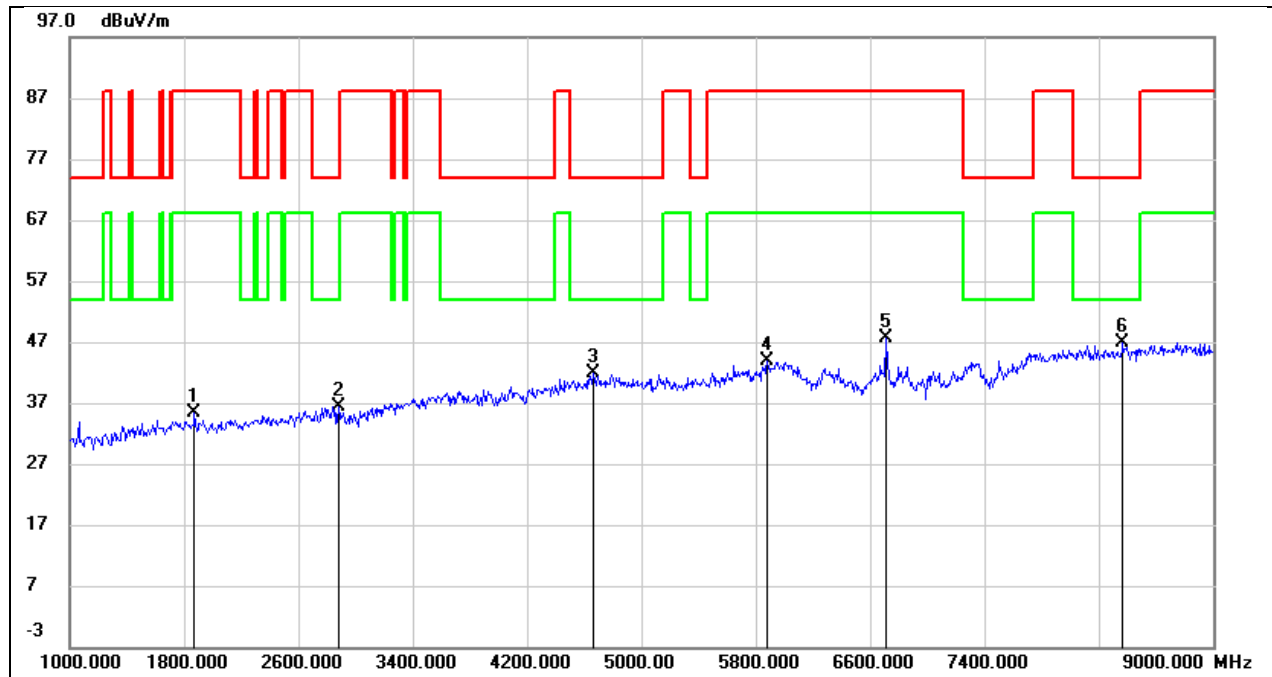


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1872.000        | 45.49          | -10.16         | 35.33           | 88.20          | -52.87      | peak        |
| 2   | 2880.000        | 43.14          | -6.70          | 36.44           | 74.00          | -37.56      | peak        |
| 3   | 4664.000        | 41.48          | 0.43           | 41.91           | 74.00          | -32.09      | peak        |
| 4   | 5880.000        | 39.13          | 4.78           | 43.91           | 88.20          | -44.29      | peak        |
| 5   | 6715.000        | 41.18          | 6.42           | 47.60           | /              | /           | fundamental |
| 6   | 8368.000        | 38.11          | 8.83           | 46.94           | 74.00          | -27.06      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6855      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

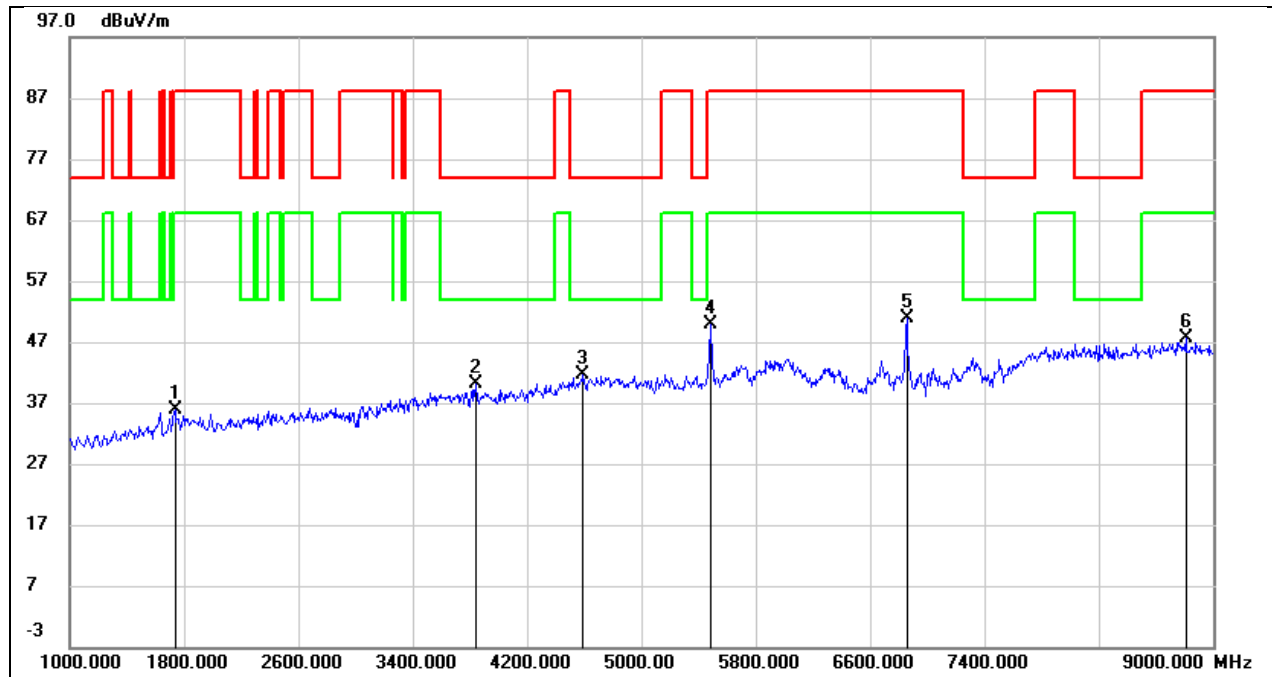


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1736.000        | 46.31          | -10.51         | 35.80           | 88.20          | -52.40      | peak        |
| 2   | 3840.000        | 43.00          | -2.80          | 40.20           | 74.00          | -33.80      | peak        |
| 3   | 4592.000        | 41.59          | 0.14           | 41.73           | 74.00          | -32.27      | peak        |
| 4   | 5488.000        | 46.78          | 3.11           | 49.89           | 88.20          | -38.31      | peak        |
| 5   | 6855.000        | 44.32          | 6.63           | 50.95           | /              | /           | fundamental |
| 6   | 8808.000        | 38.04          | 9.56           | 47.60           | 88.20          | -40.60      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6855      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

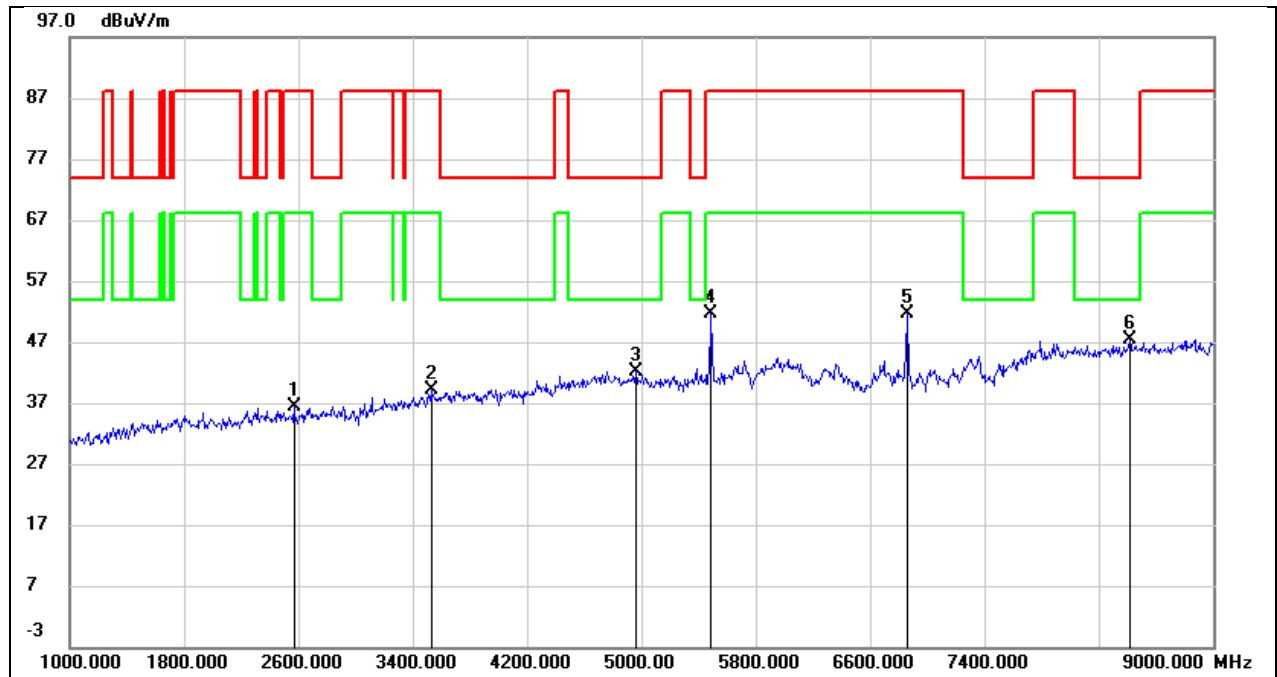


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2568.000        | 44.41          | -7.93          | 36.48           | 88.20          | -51.72      | peak        |
| 2   | 3528.000        | 42.73          | -3.65          | 39.08           | 88.20          | -49.12      | peak        |
| 3   | 4960.000        | 40.42          | 1.72           | 42.14           | 74.00          | -31.86      | peak        |
| 4   | 5488.000        | 48.64          | 3.11           | 51.75           | 88.20          | -36.45      | peak        |
| 5   | 6855.000        | 44.99          | 6.64           | 51.63           | /              | /           | fundamental |
| 6   | 8416.000        | 38.53          | 8.88           | 47.41           | 74.00          | -26.59      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6875      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

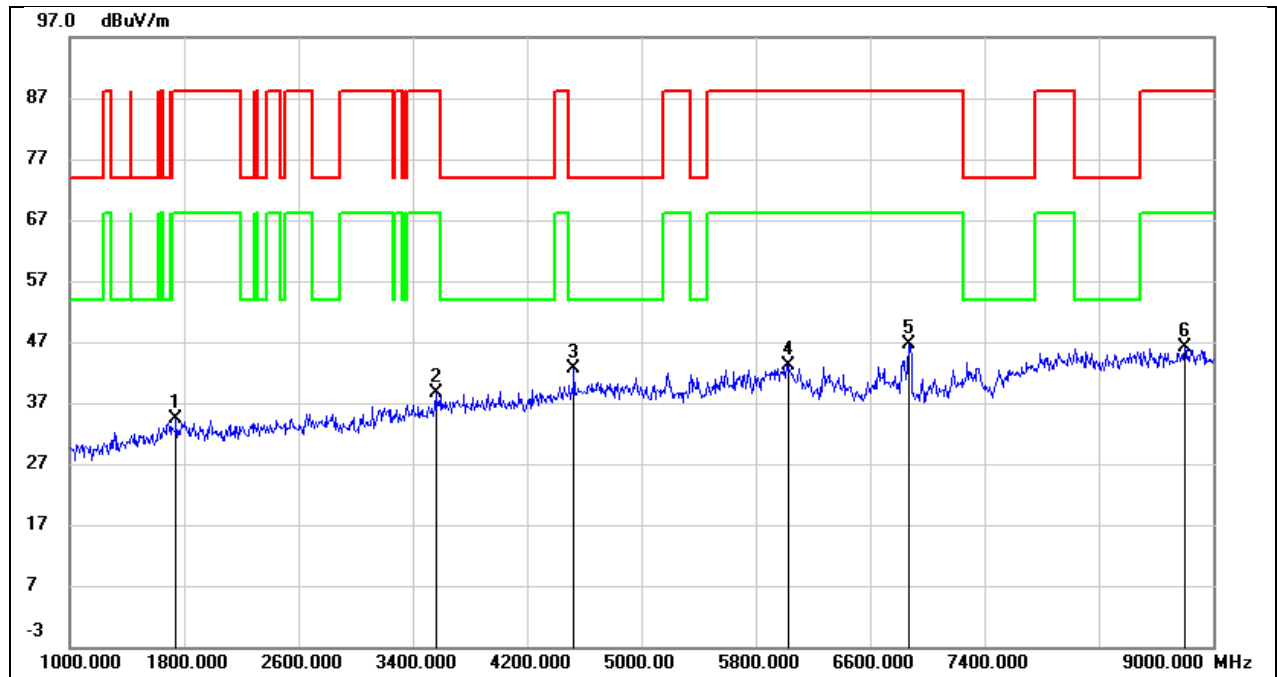


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1744.000        | 44.78          | -10.45         | 34.33           | 88.20          | -53.87      | peak        |
| 2   | 3560.000        | 42.10          | -3.49          | 38.61           | 88.20          | -49.59      | peak        |
| 3   | 4528.000        | 42.72          | -0.20          | 42.52           | 74.00          | -31.48      | peak        |
| 4   | 6024.000        | 37.65          | 5.53           | 43.18           | 88.20          | -45.02      | peak        |
| 5   | 6875.000        | 39.93          | 6.62           | 46.55           | /              | /           | fundamental |
| 6   | 8800.000        | 36.47          | 9.54           | 46.01           | 88.20          | -42.19      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6875      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

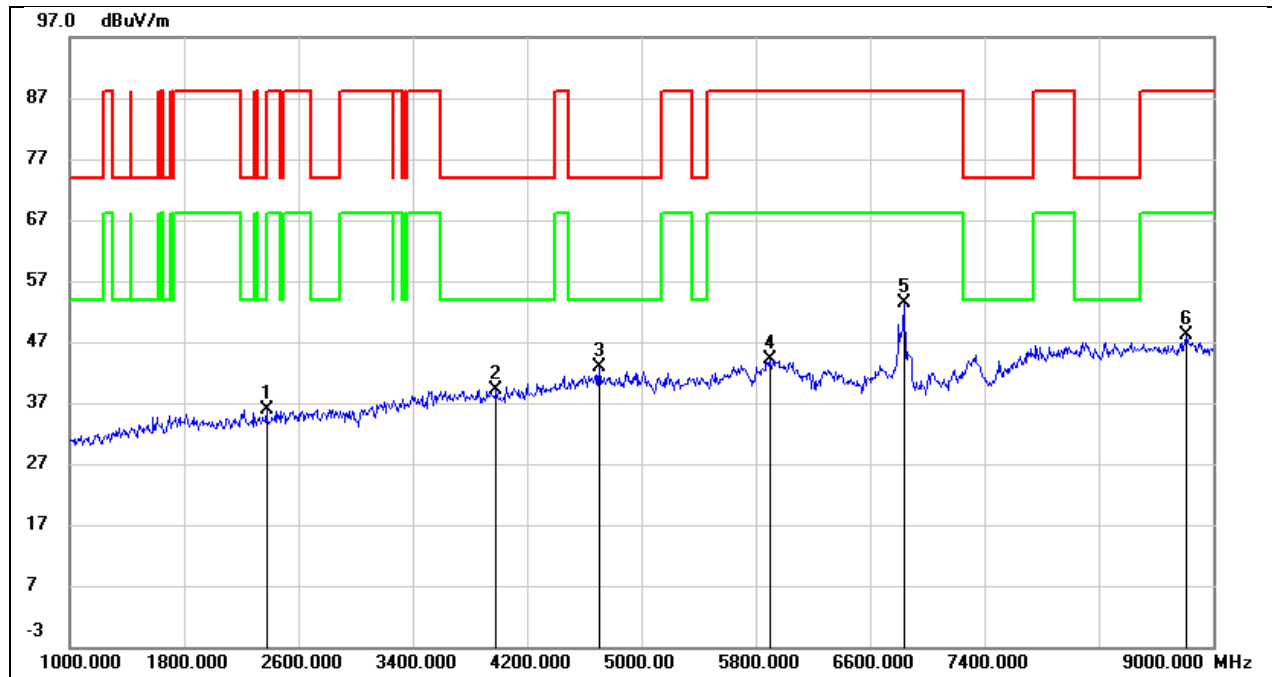


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2376.000        | 44.70          | -8.73          | 35.97           | 74.00          | -38.03      | peak        |
| 2   | 3984.000        | 41.78          | -2.54          | 39.24           | 74.00          | -34.76      | peak        |
| 3   | 4704.000        | 42.20          | 0.59           | 42.79           | 74.00          | -31.21      | peak        |
| 4   | 5904.000        | 39.19          | 4.92           | 44.11           | 88.20          | -44.09      | peak        |
| 5   | 6875.000        | 46.78          | 6.64           | 53.42           | /              | /           | fundamental |
| 6   | 8816.000        | 38.45          | 9.59           | 48.04           | 88.20          | -40.16      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7015      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

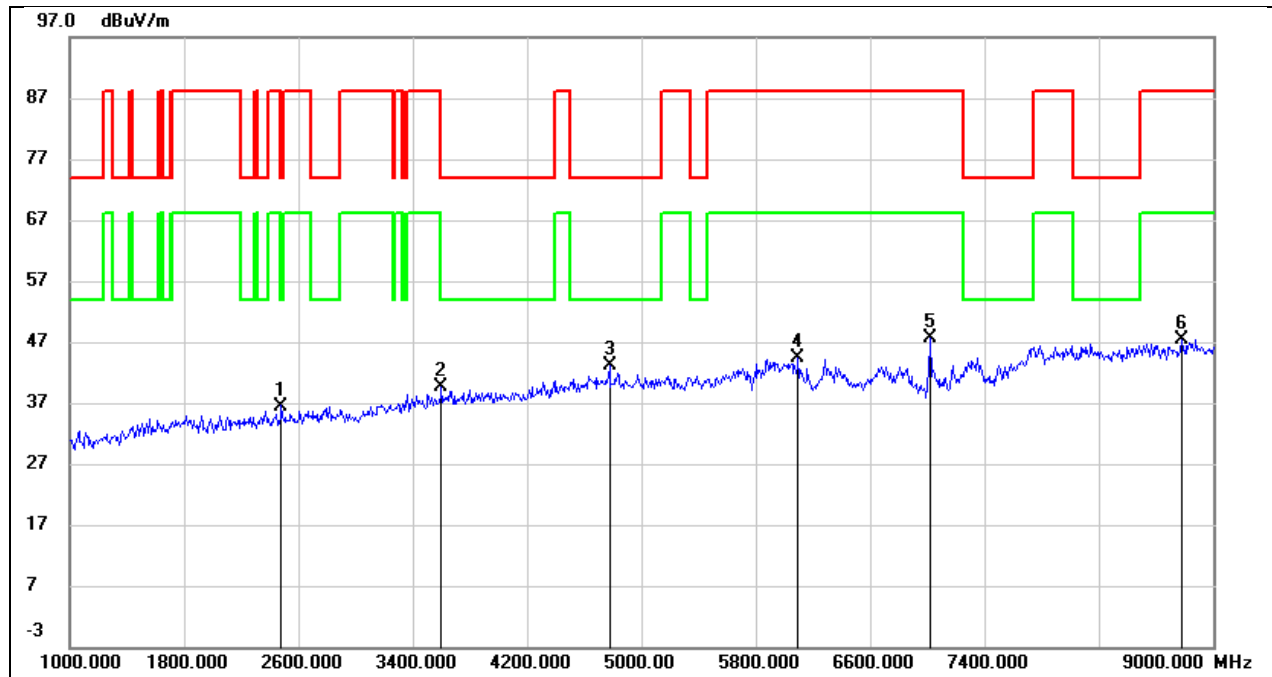


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2480.000        | 44.79          | -8.29          | 36.50           | 88.20          | -51.70      | peak        |
| 2   | 3600.000        | 42.86          | -3.31          | 39.55           | 74.00          | -34.45      | peak        |
| 3   | 4776.000        | 42.34          | 0.87           | 43.21           | 74.00          | -30.79      | peak        |
| 4   | 6096.000        | 38.52          | 5.83           | 44.35           | 88.20          | -43.85      | peak        |
| 5   | 7015.000        | 40.95          | 6.57           | 47.52           | /              | /           | fundamental |
| 6   | 8776.000        | 37.89          | 9.51           | 47.40           | 88.20          | -40.80      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7015      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

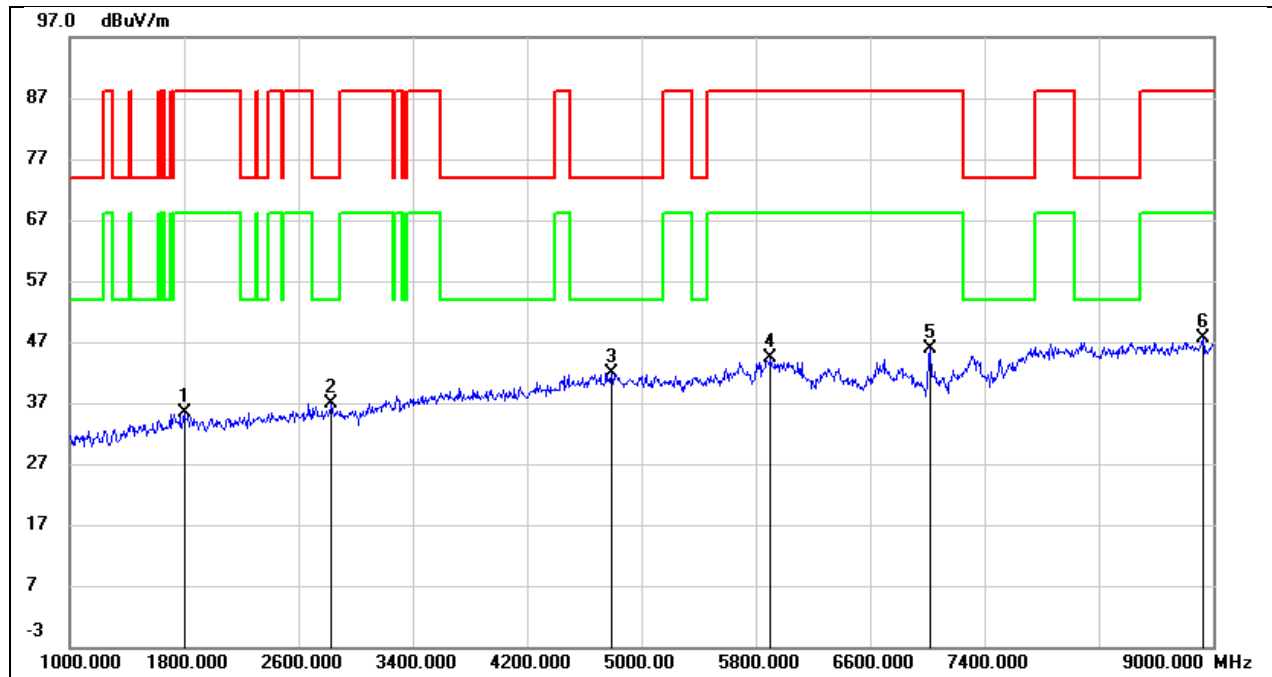


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 1800.000        | 45.34          | -10.08         | 35.26           | 88.20          | -52.94      | peak        |
| 2   | 2832.000        | 43.86          | -6.91          | 36.95           | 74.00          | -37.05      | peak        |
| 3   | 4792.000        | 40.88          | 0.94           | 41.82           | 74.00          | -32.18      | peak        |
| 4   | 5904.000        | 39.57          | 4.92           | 44.49           | 88.20          | -43.71      | peak        |
| 5   | 7015.000        | 39.21          | 6.57           | 45.78           | /              | /           | fundamental |
| 6   | 8928.000        | 37.69          | 9.88           | 47.57           | 88.20          | -40.63      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

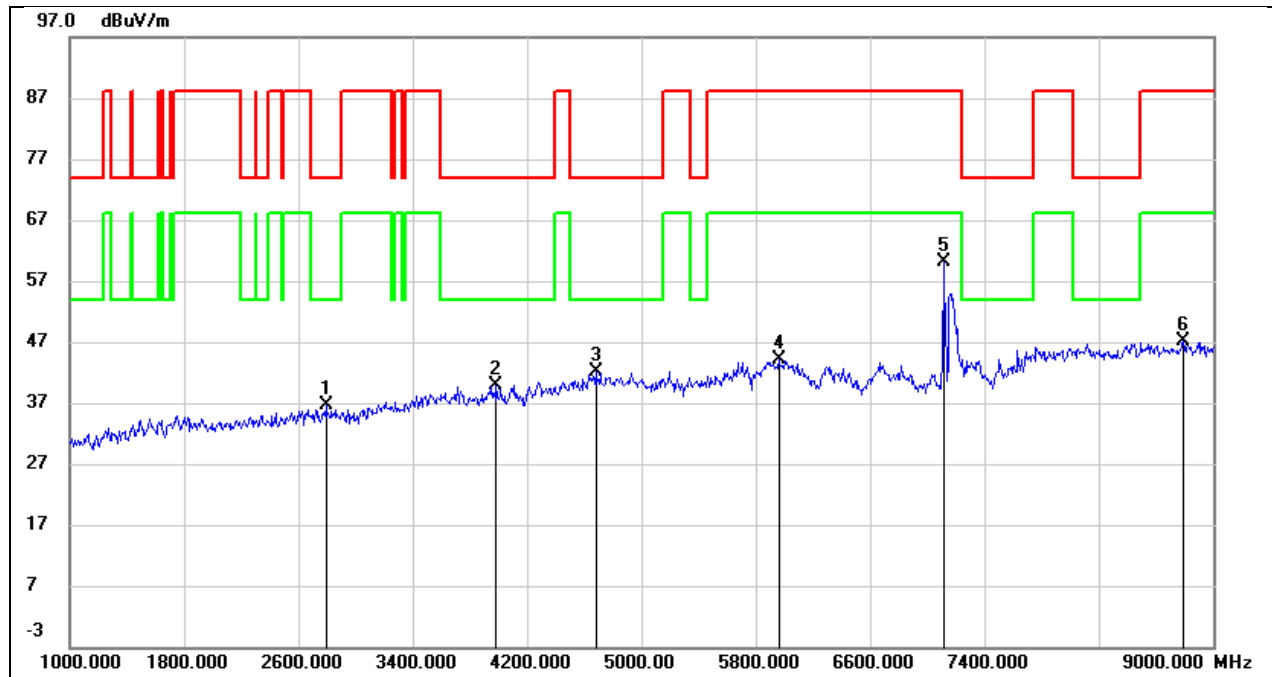

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark      |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|-------------|
| 1   | 2792.000        | 43.69          | -7.07          | 36.62           | 74.00          | -37.38      | peak        |
| 2   | 3984.000        | 42.42          | -2.54          | 39.88           | 74.00          | -34.12      | peak        |
| 3   | 4680.000        | 41.73          | 0.50           | 42.23           | 74.00          | -31.77      | peak        |
| 4   | 5960.000        | 38.87          | 5.21           | 44.08           | 88.20          | -44.12      | peak        |
| 5   | 7115.000        | 53.43          | 6.66           | 60.09           | /              | /           | fundamental |
| 6   | 8792.000        | 37.65          | 9.53           | 47.18           | 88.20          | -41.02      | peak        |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7115      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

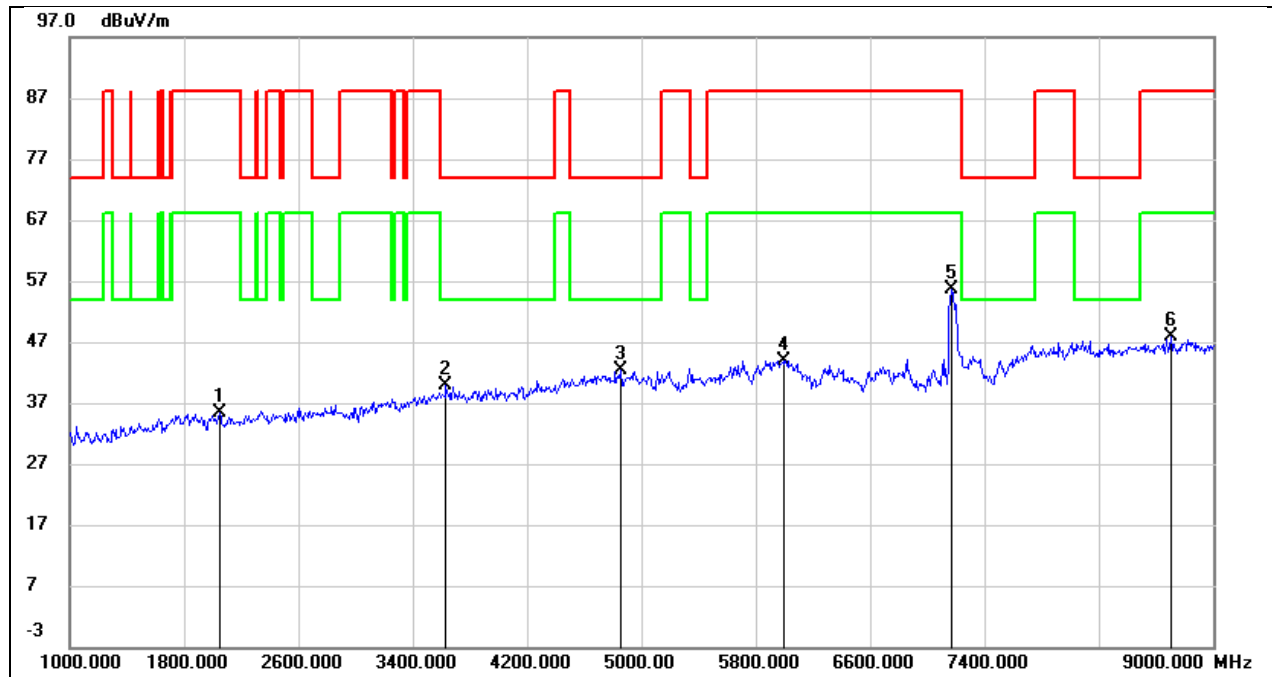


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 2048.000        | 45.43          | -10.09         | 35.34           | 88.20          | -52.86      | peak   |
| 2   | 3632.000        | 43.04          | -3.24          | 39.80           | 74.00          | -34.20      | peak   |
| 3   | 4856.000        | 41.05          | 1.23           | 42.28           | 74.00          | -31.72      | peak   |
| 4   | 6000.000        | 38.56          | 5.43           | 43.99           | 88.20          | -44.21      | peak   |
| 5   | 7168.000        | 48.99          | 6.71           | 55.70           | 88.20          | -32.50      | peak   |
| 6   | 8704.000        | 38.38          | 9.41           | 47.79           | 88.20          | -40.41      | peak   |

Note: Indoor Client and Standard Power Client have been tested, only the worst data of Indoor Client-UNII-6/-8 and Standard Power Client-UNII-5/-7 were recorded in the report.


## 8.4. SPURIOUS EMISSIONS(9 GHZ~18 GHZ)

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

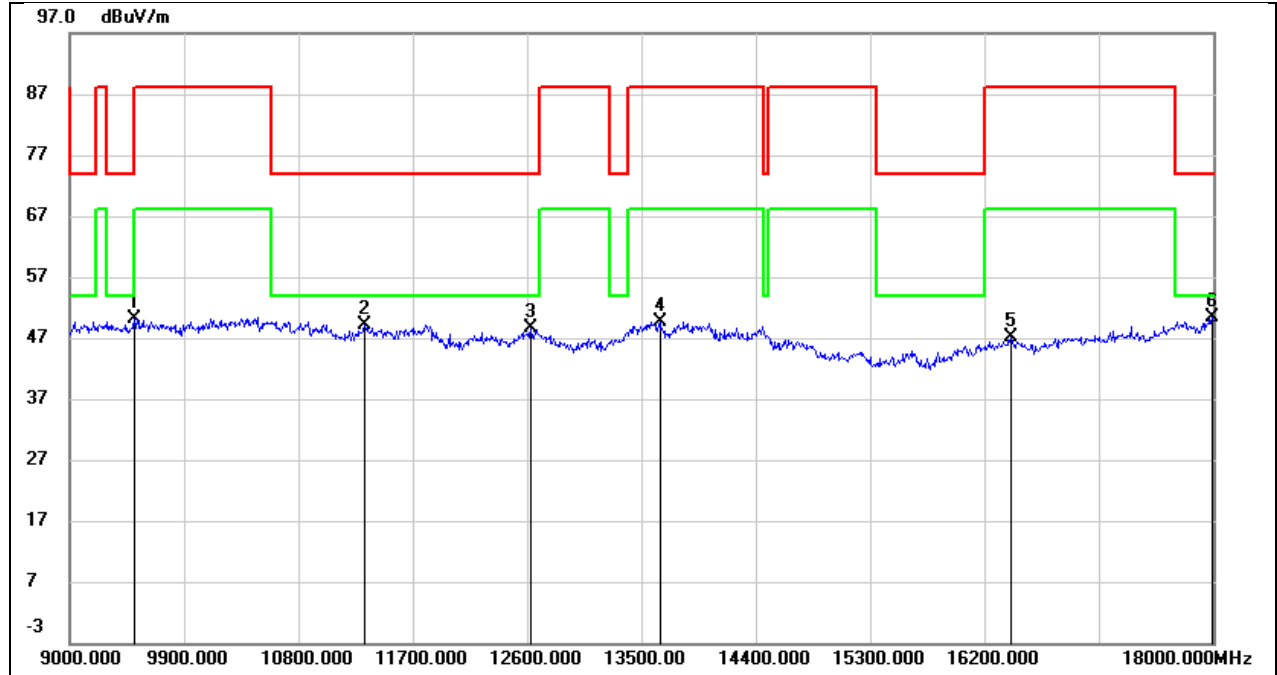


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9504.000        | 37.54          | 12.64          | 50.18           | 88.20          | -38.02      | peak   |
| 2   | 11322.000       | 32.16          | 17.01          | 49.17           | 74.00          | -24.83      | peak   |
| 3   | 12627.000       | 28.86          | 19.66          | 48.52           | 74.00          | -25.48      | peak   |
| 4   | 13644.000       | 26.84          | 22.86          | 49.70           | 88.20          | -38.50      | peak   |
| 5   | 16407.000       | 25.08          | 21.95          | 47.03           | 88.20          | -41.17      | peak   |
| 6   | 17991.000       | 22.36          | 28.02          | 50.38           | 74.00          | -23.62      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

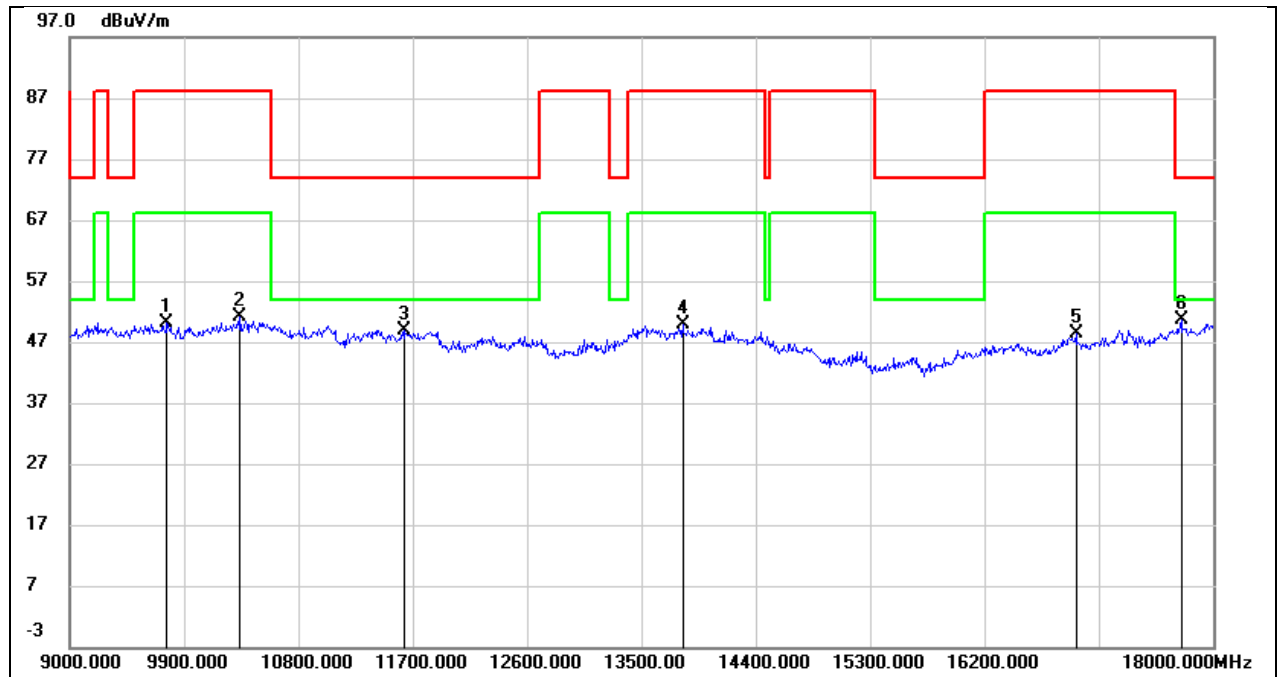


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9765.000        | 36.43          | 13.65          | 50.08           | 88.20          | -38.12      | peak   |
| 2   | 10341.000       | 37.04          | 14.11          | 51.15           | 88.20          | -37.05      | peak   |
| 3   | 11637.000       | 30.41          | 18.36          | 48.77           | 74.00          | -25.23      | peak   |
| 4   | 13824.000       | 26.78          | 23.14          | 49.92           | 88.20          | -38.28      | peak   |
| 5   | 16920.000       | 25.50          | 22.76          | 48.26           | 88.20          | -39.94      | peak   |
| 6   | 17748.000       | 24.39          | 26.13          | 50.52           | 74.00          | -23.48      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6175      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

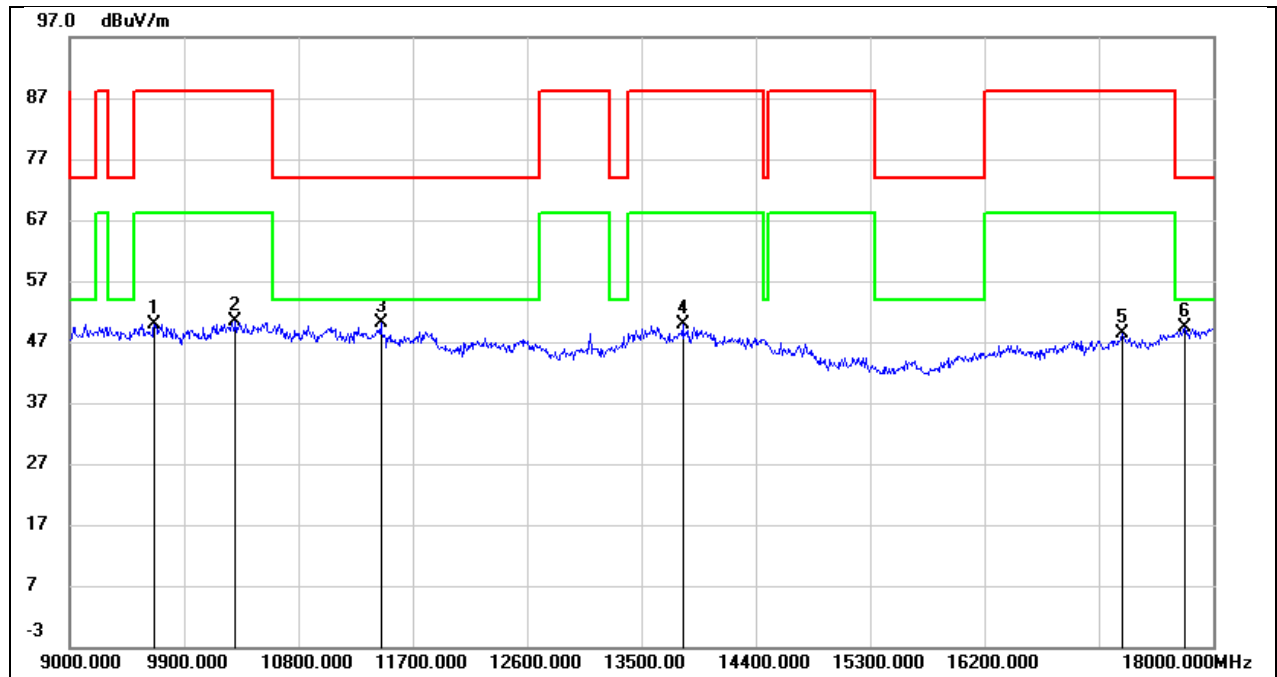


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9666.000        | 36.49          | 13.39          | 49.88           | 88.20          | -38.32      | peak   |
| 2   | 10305.000       | 36.23          | 14.03          | 50.26           | 88.20          | -37.94      | peak   |
| 3   | 11448.000       | 32.55          | 17.55          | 50.10           | 74.00          | -23.90      | peak   |
| 4   | 13824.000       | 26.65          | 23.14          | 49.79           | 88.20          | -38.41      | peak   |
| 5   | 17280.000       | 24.47          | 23.85          | 48.32           | 88.20          | -39.88      | peak   |
| 6   | 17775.000       | 23.11          | 26.30          | 49.41           | 74.00          | -24.59      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6175      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

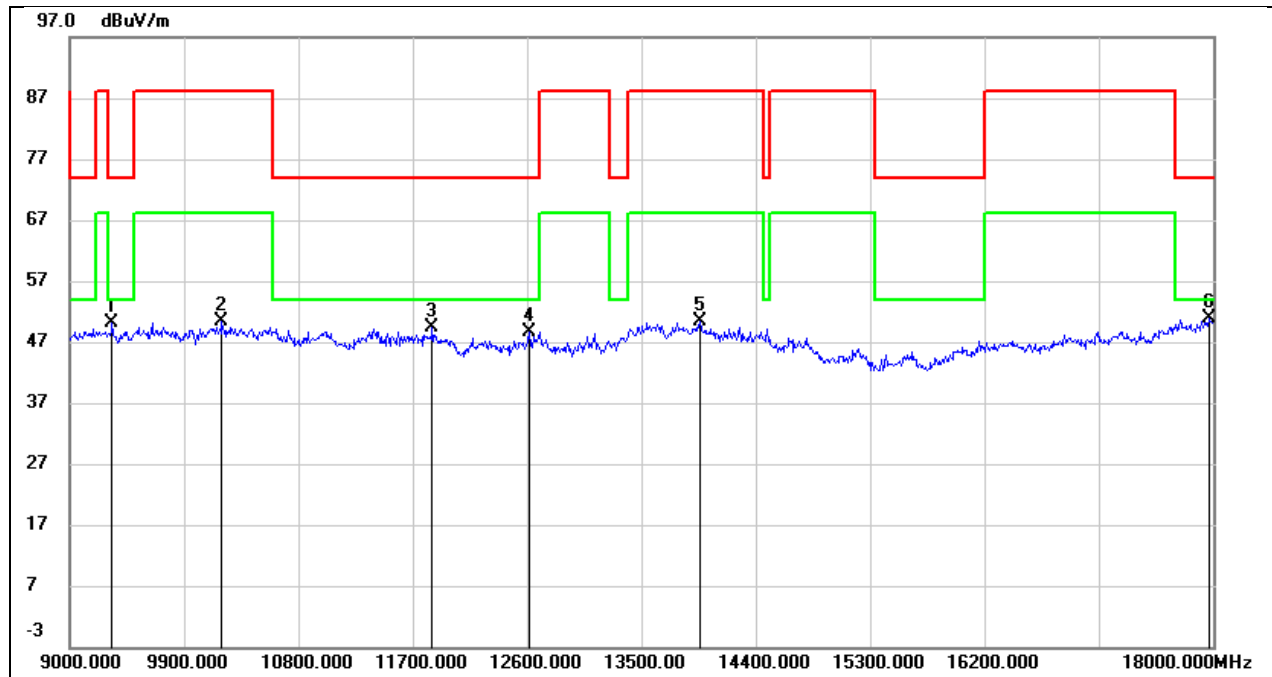


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9333.000        | 38.41          | 11.77          | 50.18           | 74.00          | -23.82      | peak   |
| 2   | 10197.000       | 36.69          | 13.77          | 50.46           | 88.20          | -37.74      | peak   |
| 3   | 11853.000       | 30.67          | 18.59          | 49.26           | 74.00          | -24.74      | peak   |
| 4   | 12618.000       | 29.09          | 19.63          | 48.72           | 74.00          | -25.28      | peak   |
| 5   | 13959.000       | 27.01          | 23.45          | 50.46           | 88.20          | -37.74      | peak   |
| 6   | 17973.000       | 23.06          | 27.88          | 50.94           | 74.00          | -23.06      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6415      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

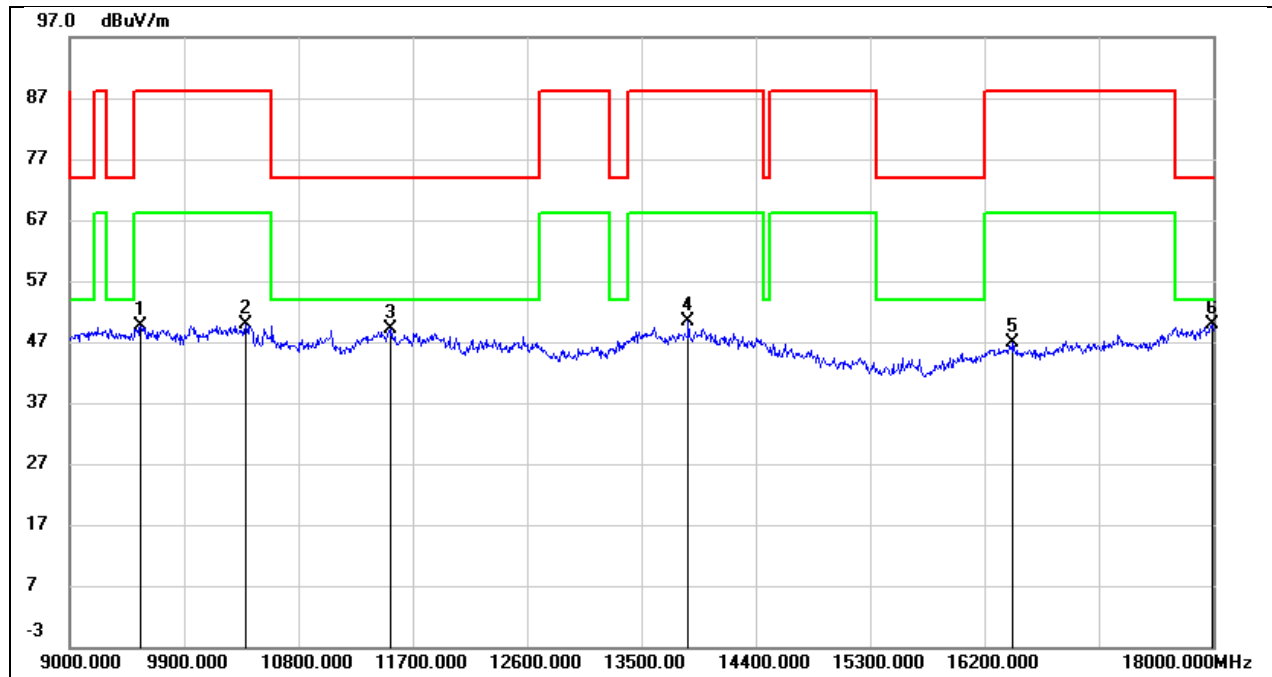


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9558.000        | 36.75          | 12.96          | 49.71           | 88.20          | -38.49      | peak   |
| 2   | 10386.000       | 35.60          | 14.22          | 49.82           | 88.20          | -38.38      | peak   |
| 3   | 11529.000       | 31.12          | 17.96          | 49.08           | 74.00          | -24.92      | peak   |
| 4   | 13869.000       | 27.10          | 23.24          | 50.34           | 88.20          | -37.86      | peak   |
| 5   | 16425.000       | 24.95          | 21.93          | 46.88           | 88.20          | -41.32      | peak   |
| 6   | 17991.000       | 21.90          | 28.02          | 49.92           | 74.00          | -24.08      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6415      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

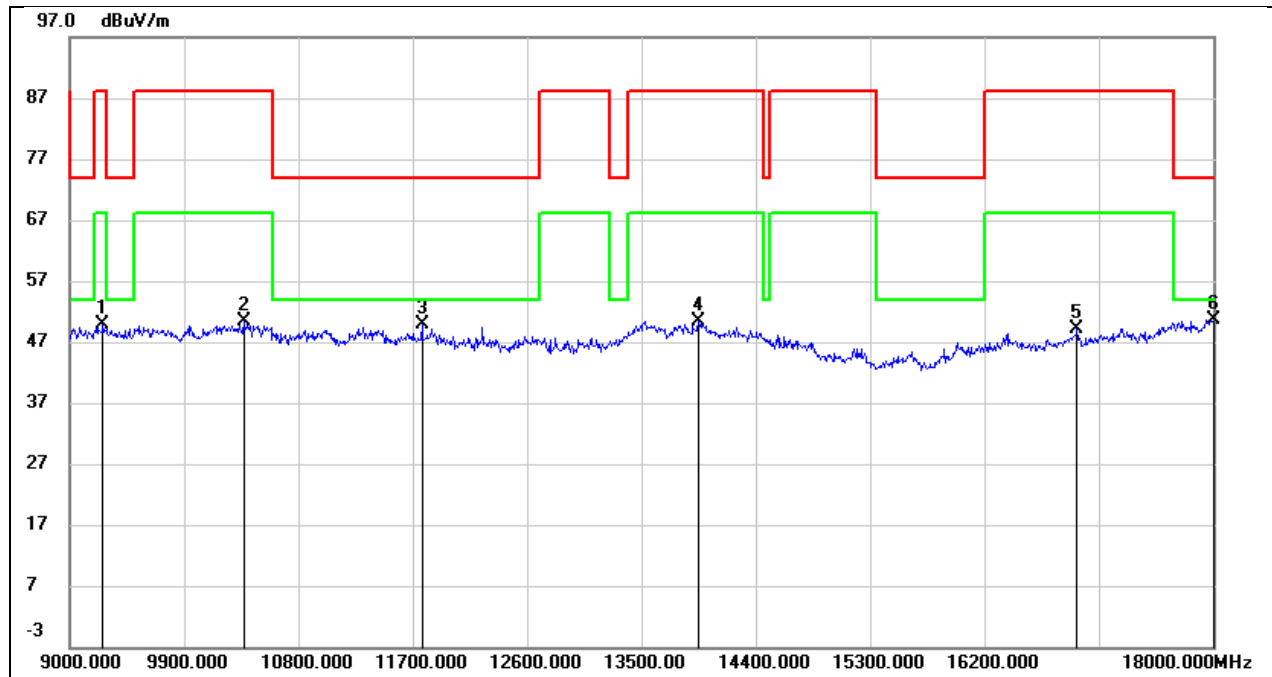


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9261.000        | 38.39          | 11.52          | 49.91           | 88.20          | -38.29      | peak   |
| 2   | 10368.000       | 36.16          | 14.18          | 50.34           | 88.20          | -37.86      | peak   |
| 3   | 11772.000       | 31.53          | 18.45          | 49.98           | 74.00          | -24.02      | peak   |
| 4   | 13950.000       | 27.00          | 23.42          | 50.42           | 88.20          | -37.78      | peak   |
| 5   | 16929.000       | 26.25          | 22.81          | 49.06           | 88.20          | -39.14      | peak   |
| 6   | 18000.000       | 22.63          | 28.10          | 50.73           | 74.00          | -23.27      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6435      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

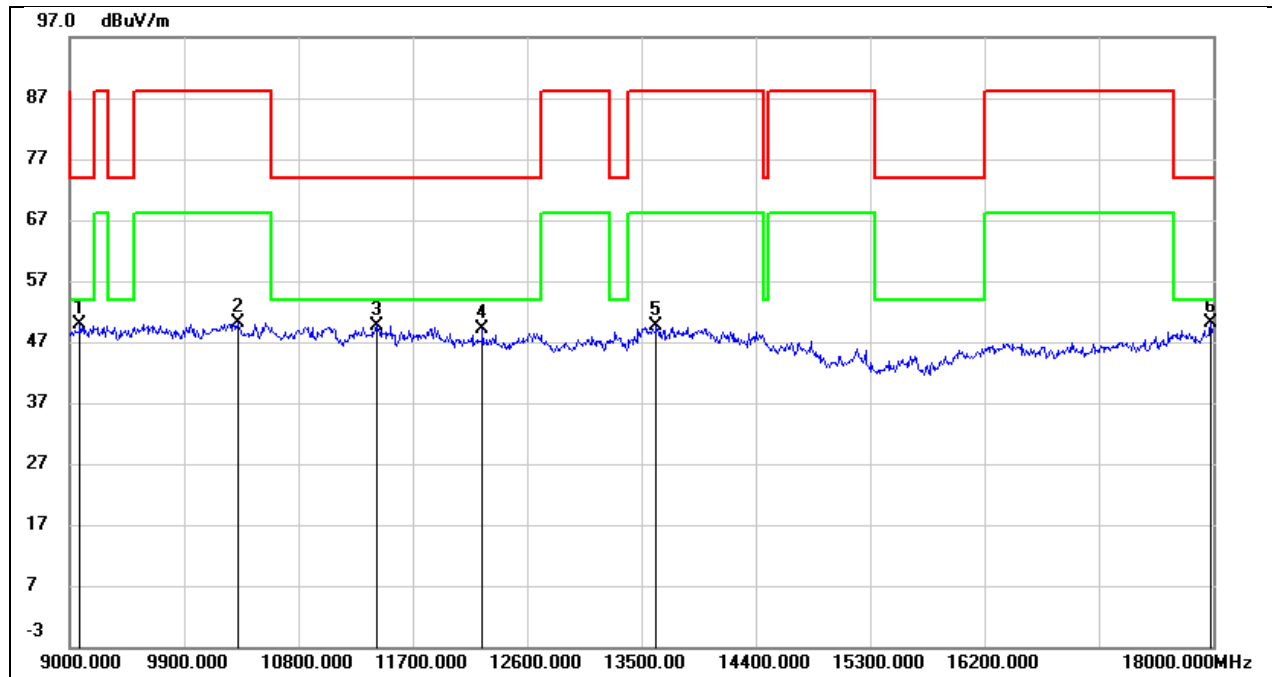


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9081.000        | 38.82          | 10.94          | 49.76           | 74.00          | -24.24      | peak   |
| 2   | 10323.000       | 36.14          | 14.07          | 50.21           | 88.20          | -37.99      | peak   |
| 3   | 11412.000       | 32.38          | 17.37          | 49.75           | 74.00          | -24.25      | peak   |
| 4   | 12249.000       | 29.83          | 19.22          | 49.05           | 74.00          | -24.95      | peak   |
| 5   | 13617.000       | 26.75          | 22.82          | 49.57           | 88.20          | -38.63      | peak   |
| 6   | 17982.000       | 22.05          | 27.96          | 50.01           | 74.00          | -23.99      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6435      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

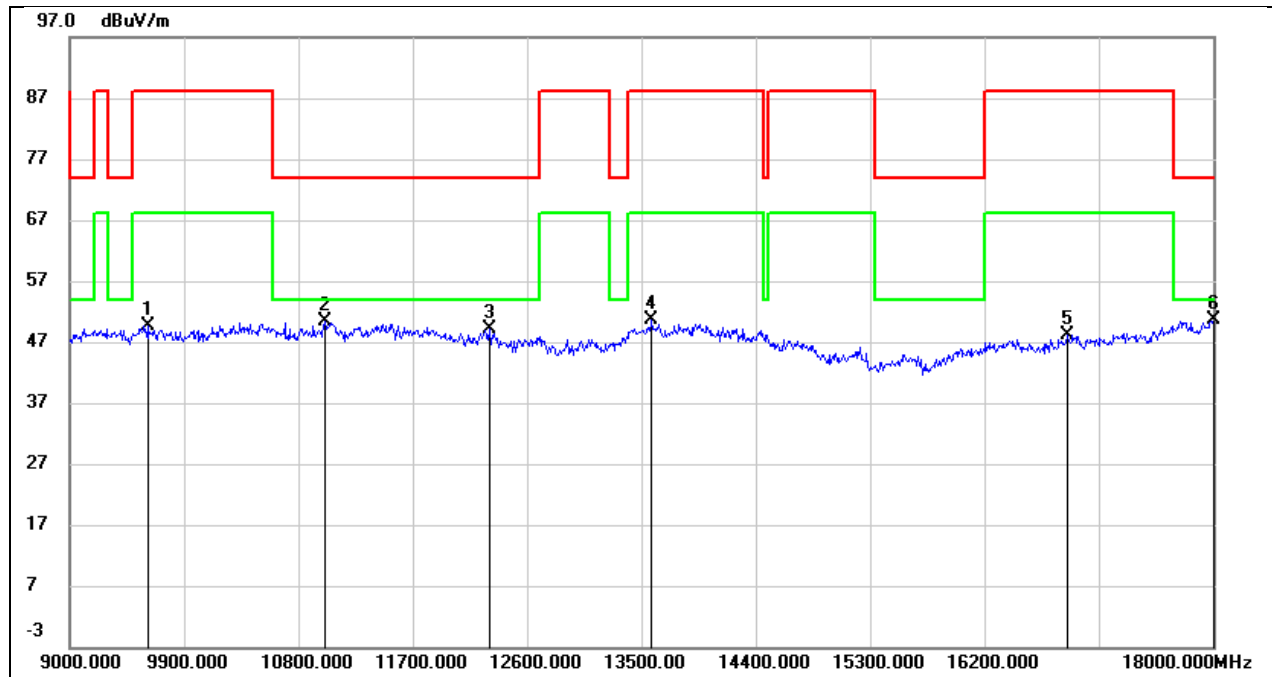


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9612.000        | 36.42          | 13.23          | 49.65           | 88.20          | -38.55      | peak   |
| 2   | 11007.000       | 34.40          | 15.88          | 50.28           | 74.00          | -23.72      | peak   |
| 3   | 12303.000       | 29.68          | 19.33          | 49.01           | 74.00          | -24.99      | peak   |
| 4   | 13581.000       | 27.80          | 22.76          | 50.56           | 88.20          | -37.64      | peak   |
| 5   | 16857.000       | 25.63          | 22.50          | 48.13           | 88.20          | -40.07      | peak   |
| 6   | 18000.000       | 22.41          | 28.10          | 50.51           | 74.00          | -23.49      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6475      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

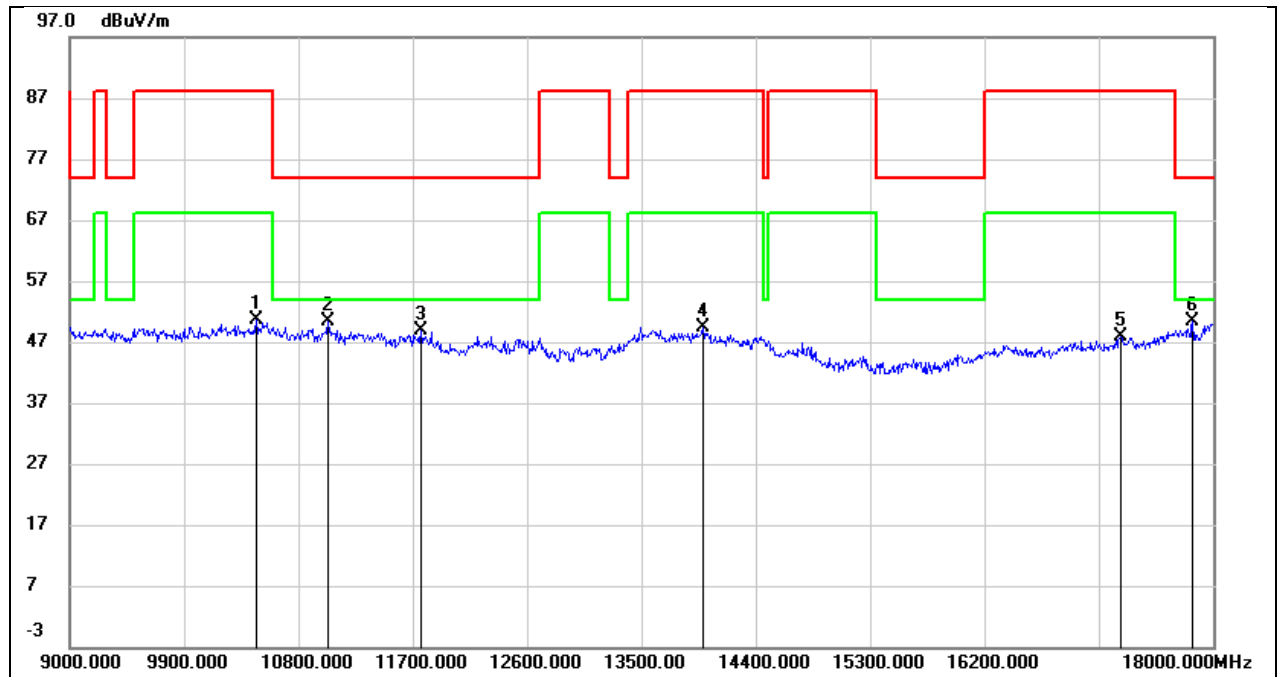


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 10467.000       | 36.15          | 14.50          | 50.65           | 88.20          | -37.55      | peak   |
| 2   | 11034.000       | 34.41          | 15.96          | 50.37           | 74.00          | -23.63      | peak   |
| 3   | 11763.000       | 30.33          | 18.44          | 48.77           | 74.00          | -25.23      | peak   |
| 4   | 13986.000       | 25.87          | 23.51          | 49.38           | 88.20          | -38.82      | peak   |
| 5   | 17271.000       | 23.98          | 23.83          | 47.81           | 88.20          | -40.39      | peak   |
| 6   | 17838.000       | 23.53          | 26.79          | 50.32           | 74.00          | -23.68      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6475      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

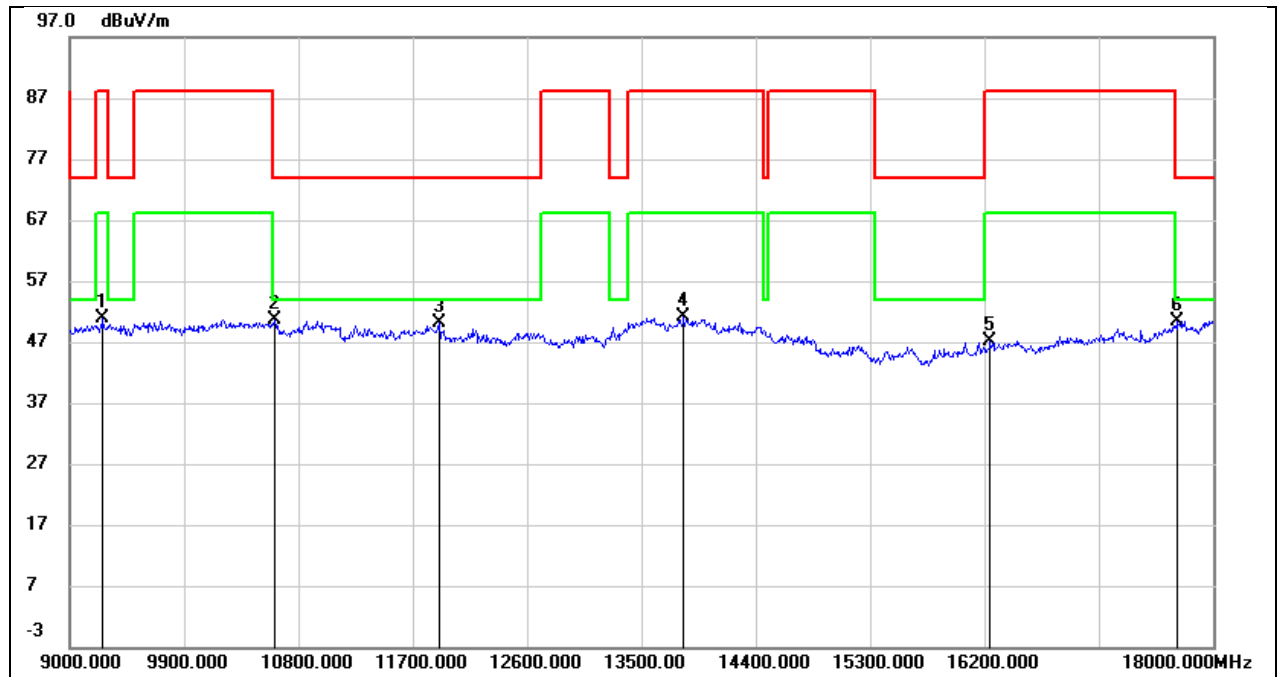


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9261.000        | 39.39          | 11.52          | 50.91           | 88.20          | -37.29      | peak   |
| 2   | 10611.000       | 35.62          | 15.01          | 50.63           | 74.00          | -23.37      | peak   |
| 3   | 11907.000       | 31.38          | 18.71          | 50.09           | 74.00          | -23.91      | peak   |
| 4   | 13833.000       | 27.93          | 23.15          | 51.08           | 88.20          | -37.12      | peak   |
| 5   | 16245.000       | 25.11          | 22.14          | 47.25           | 88.20          | -40.95      | peak   |
| 6   | 17721.000       | 24.56          | 25.93          | 50.49           | 74.00          | -23.51      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6515      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

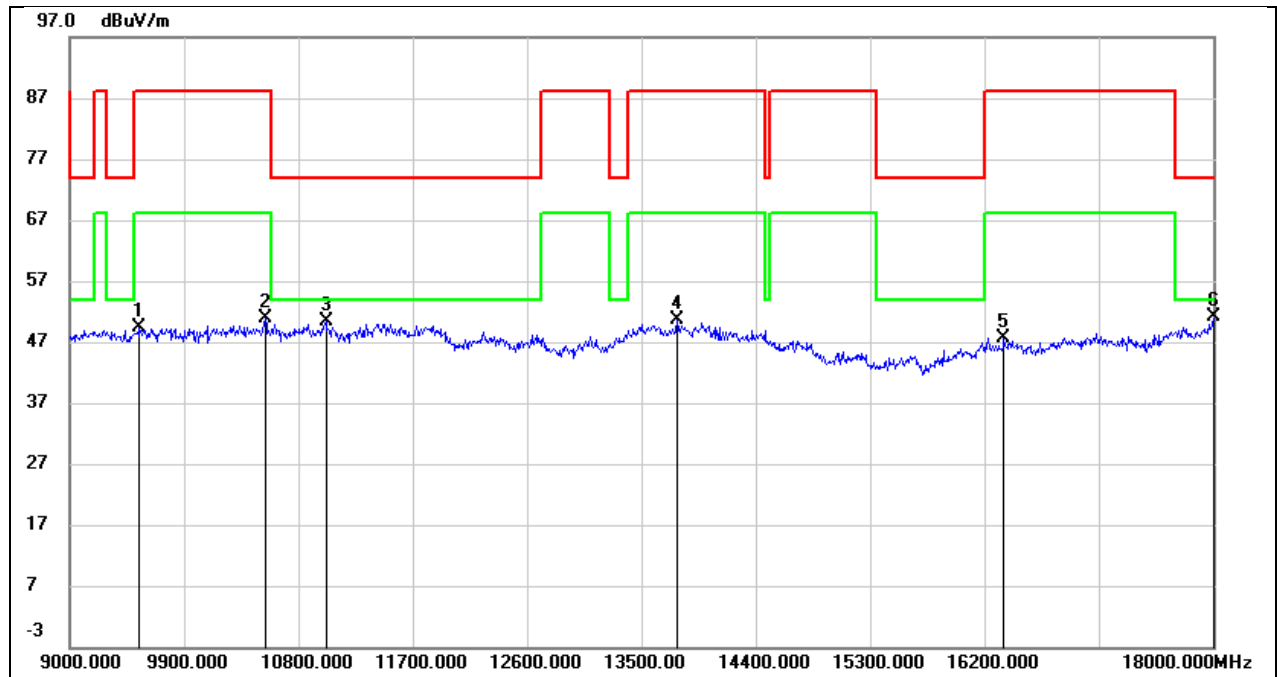


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9549.000        | 36.36          | 12.90          | 49.26           | 88.20          | -38.94      | peak   |
| 2   | 10539.000       | 36.02          | 14.76          | 50.78           | 88.20          | -37.42      | peak   |
| 3   | 11016.000       | 34.37          | 15.91          | 50.28           | 74.00          | -23.72      | peak   |
| 4   | 13779.000       | 27.46          | 23.05          | 50.51           | 88.20          | -37.69      | peak   |
| 5   | 16353.000       | 25.64          | 22.01          | 47.65           | 88.20          | -40.55      | peak   |
| 6   | 18000.000       | 22.97          | 28.10          | 51.07           | 74.00          | -22.93      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6515      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

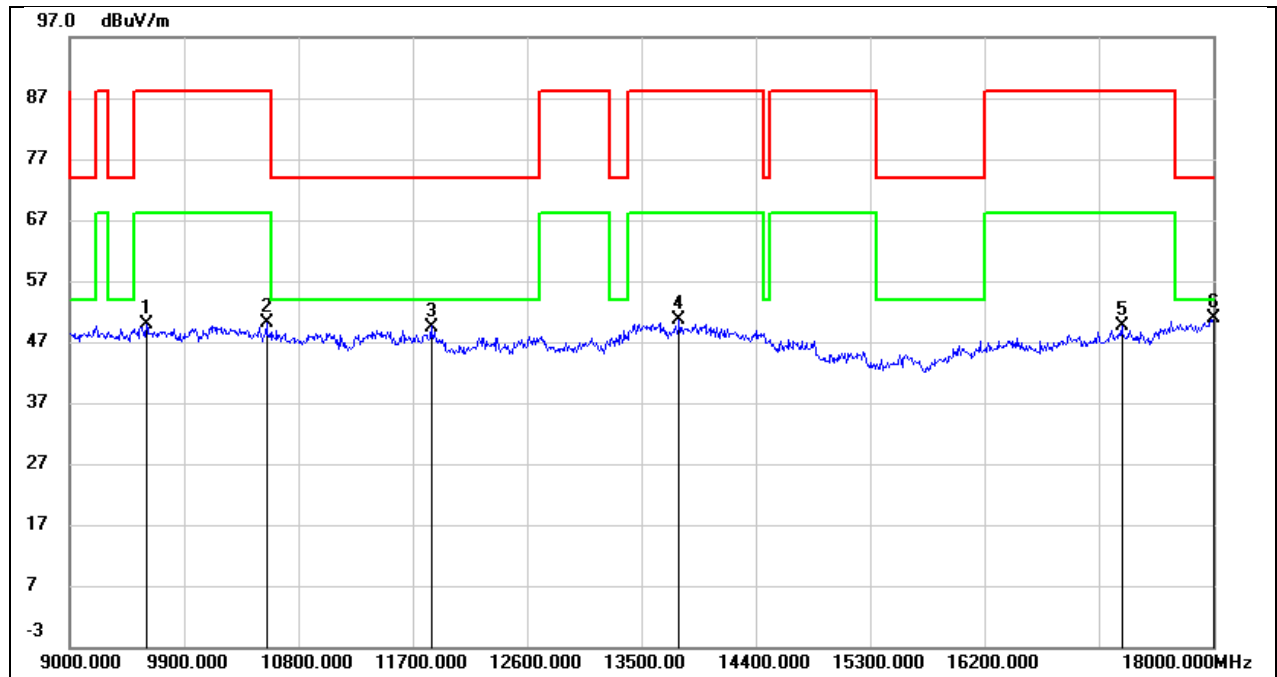


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9603.000        | 36.72          | 13.20          | 49.92           | 88.20          | -38.28      | peak   |
| 2   | 10548.000       | 35.29          | 14.80          | 50.09           | 88.20          | -38.11      | peak   |
| 3   | 11844.000       | 30.94          | 18.56          | 49.50           | 74.00          | -24.50      | peak   |
| 4   | 13797.000       | 27.51          | 23.07          | 50.58           | 88.20          | -37.62      | peak   |
| 5   | 17280.000       | 25.71          | 23.85          | 49.56           | 88.20          | -38.64      | peak   |
| 6   | 18000.000       | 22.84          | 28.10          | 50.94           | 74.00          | -23.06      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6535      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

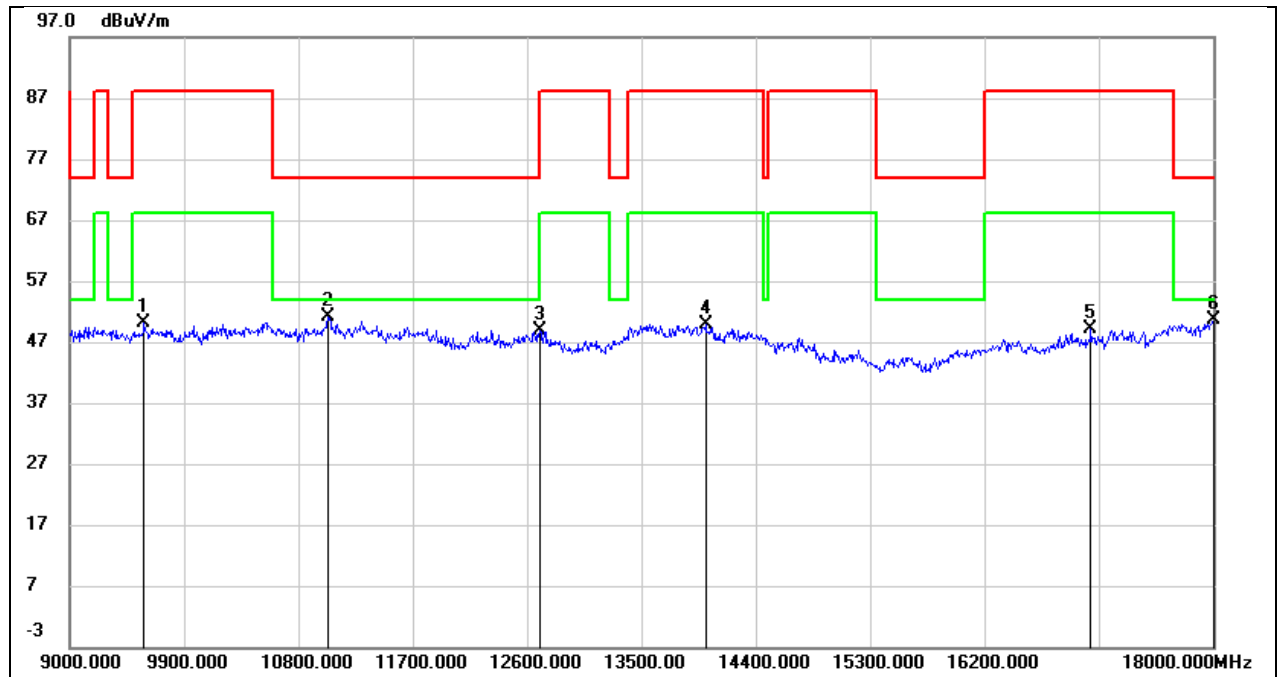


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 37.09          | 13.11          | 50.20           | 88.20          | -38.00      | peak   |
| 2   | 11034.000       | 35.07          | 15.96          | 51.03           | 74.00          | -22.97      | peak   |
| 3   | 12699.000       | 29.00          | 19.79          | 48.79           | 74.00          | -25.21      | peak   |
| 4   | 14004.000       | 26.36          | 23.52          | 49.88           | 88.20          | -38.32      | peak   |
| 5   | 17037.000       | 25.82          | 23.20          | 49.02           | 88.20          | -39.18      | peak   |
| 6   | 18000.000       | 22.63          | 28.10          | 50.73           | 74.00          | -23.27      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6535      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

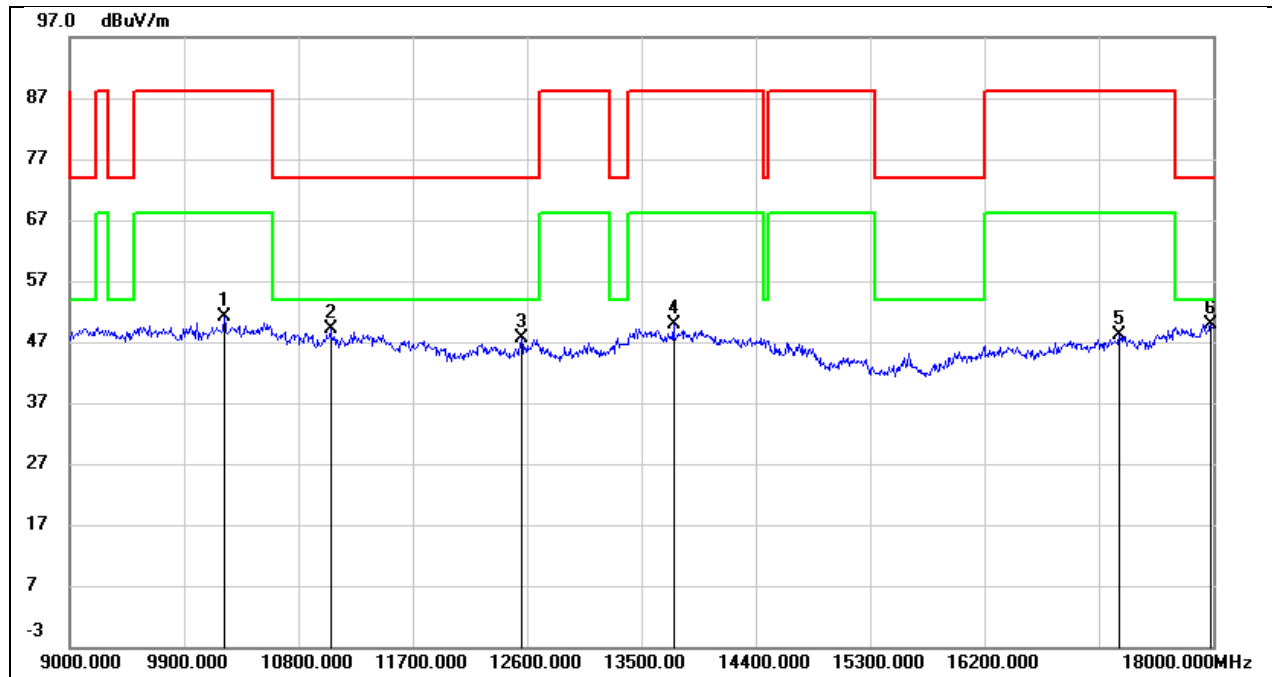


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 10215.000       | 37.26          | 13.82          | 51.08           | 88.20          | -37.12      | peak   |
| 2   | 11052.000       | 33.12          | 16.02          | 49.14           | 74.00          | -24.86      | peak   |
| 3   | 12555.000       | 27.99          | 19.60          | 47.59           | 74.00          | -26.41      | peak   |
| 4   | 13752.000       | 26.88          | 23.01          | 49.89           | 88.20          | -38.31      | peak   |
| 5   | 17262.000       | 24.42          | 23.80          | 48.22           | 88.20          | -39.98      | peak   |
| 6   | 17982.000       | 22.02          | 27.96          | 49.98           | 74.00          | -24.02      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6715      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

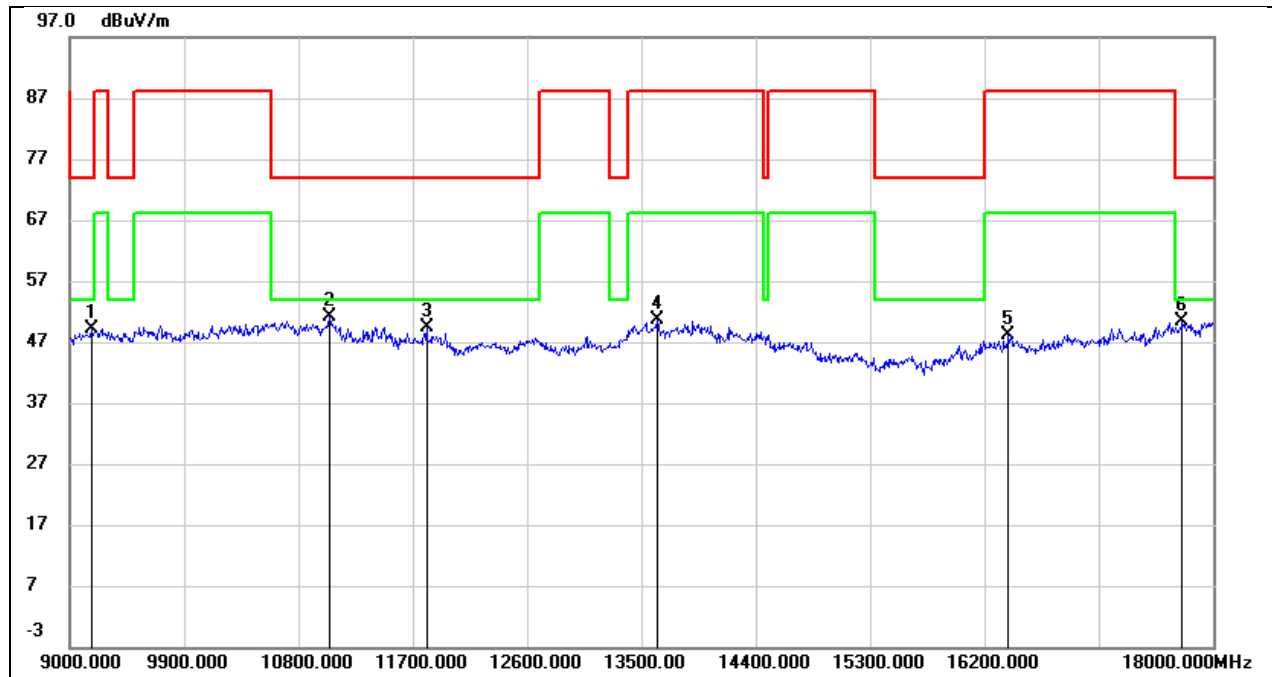


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9171.000        | 37.91          | 11.21          | 49.12           | 74.00          | -24.88      | peak   |
| 2   | 11043.000       | 35.14          | 15.99          | 51.13           | 74.00          | -22.87      | peak   |
| 3   | 11808.000       | 30.87          | 18.50          | 49.37           | 74.00          | -24.63      | peak   |
| 4   | 13626.000       | 27.74          | 22.83          | 50.57           | 88.20          | -37.63      | peak   |
| 5   | 16389.000       | 26.20          | 21.97          | 48.17           | 88.20          | -40.03      | peak   |
| 6   | 17757.000       | 24.24          | 26.18          | 50.42           | 74.00          | -23.58      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6715      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

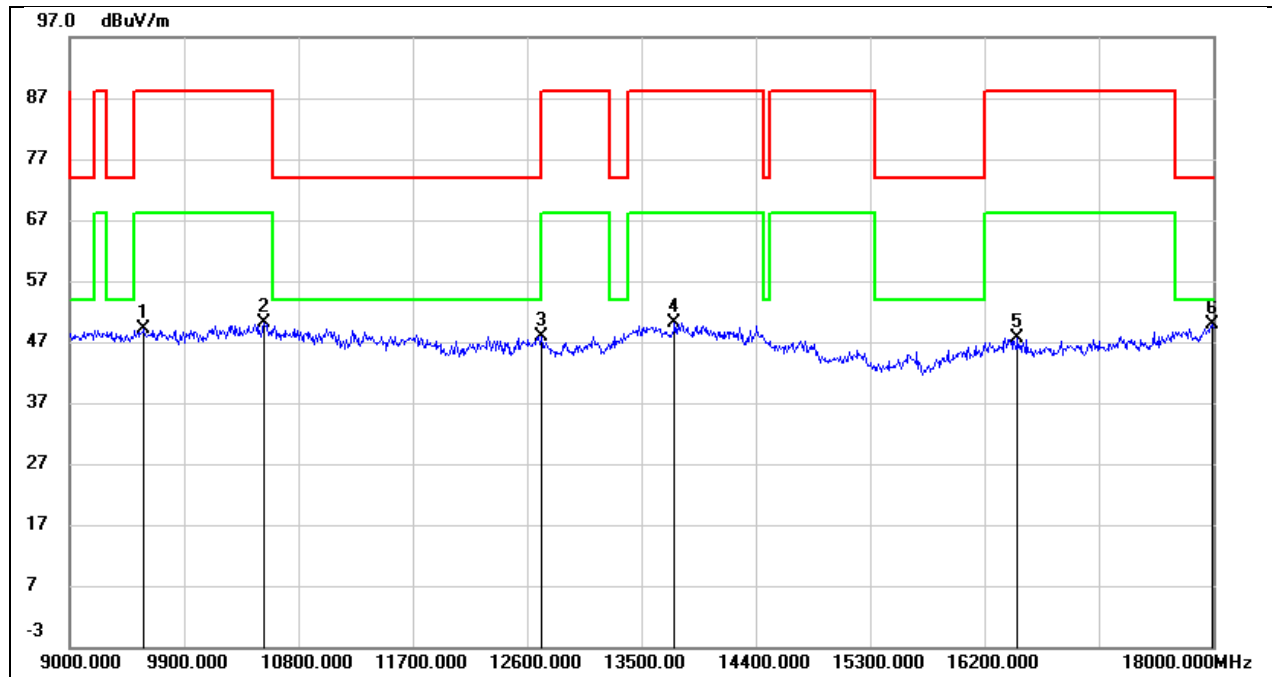


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.14          | 13.11          | 49.25           | 88.20          | -38.95      | peak   |
| 2   | 10530.000       | 35.36          | 14.74          | 50.10           | 88.20          | -38.10      | peak   |
| 3   | 12717.000       | 28.04          | 19.82          | 47.86           | 88.20          | -40.34      | peak   |
| 4   | 13761.000       | 27.20          | 23.03          | 50.23           | 88.20          | -37.97      | peak   |
| 5   | 16461.000       | 25.69          | 21.88          | 47.57           | 88.20          | -40.63      | peak   |
| 6   | 17991.000       | 21.76          | 28.02          | 49.78           | 74.00          | -24.22      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6855      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

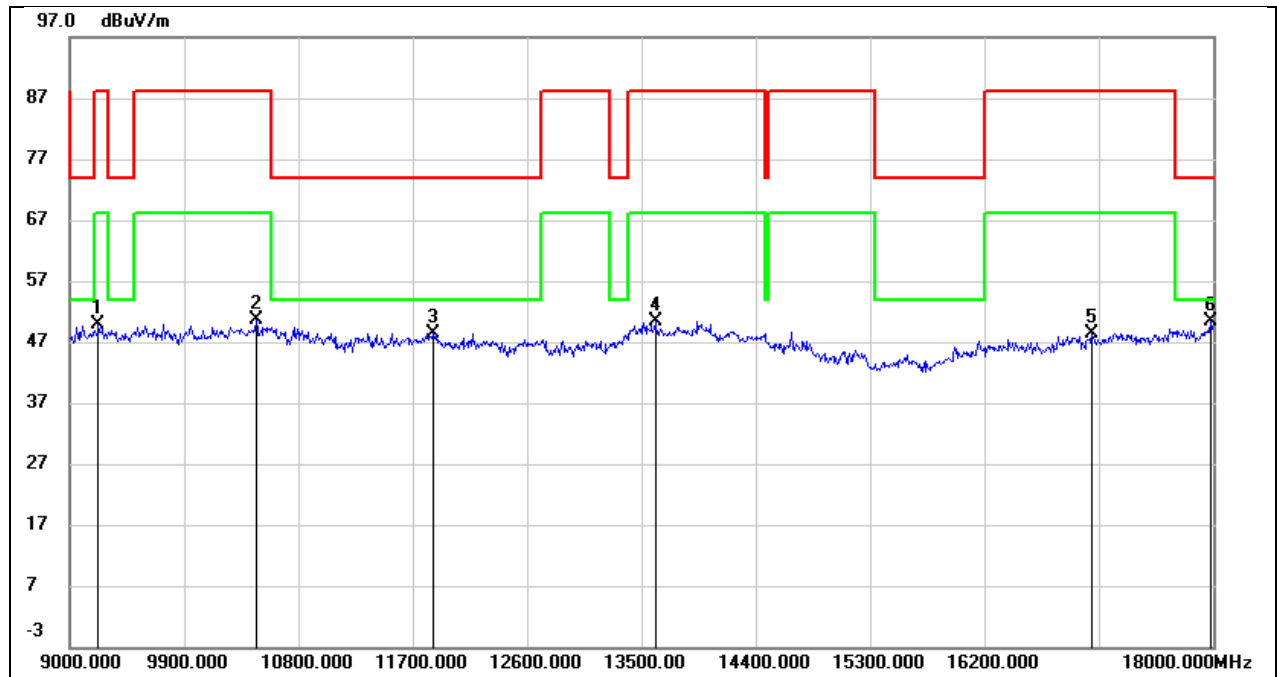


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9225.000        | 38.49          | 11.38          | 49.87           | 88.20          | -38.33      | peak   |
| 2   | 10467.000       | 36.02          | 14.50          | 50.52           | 88.20          | -37.68      | peak   |
| 3   | 11862.000       | 29.71          | 18.61          | 48.32           | 74.00          | -25.68      | peak   |
| 4   | 13608.000       | 27.48          | 22.81          | 50.29           | 88.20          | -37.91      | peak   |
| 5   | 17046.000       | 25.20          | 23.22          | 48.42           | 88.20          | -39.78      | peak   |
| 6   | 17982.000       | 22.43          | 27.96          | 50.39           | 74.00          | -23.61      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6855      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

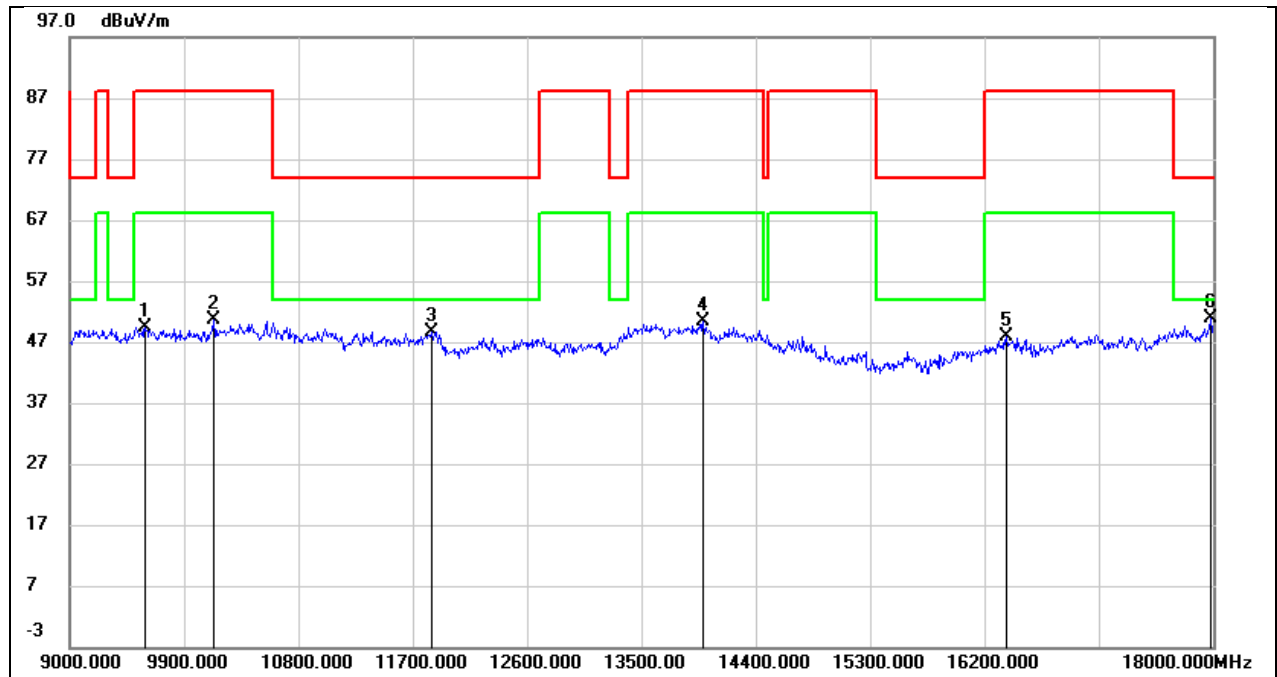


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9594.000        | 36.20          | 13.16          | 49.36           | 88.20          | -38.84      | peak   |
| 2   | 10134.000       | 36.87          | 13.74          | 50.61           | 88.20          | -37.59      | peak   |
| 3   | 11853.000       | 30.01          | 18.59          | 48.60           | 74.00          | -25.40      | peak   |
| 4   | 13986.000       | 26.97          | 23.51          | 50.48           | 88.20          | -37.72      | peak   |
| 5   | 16371.000       | 25.97          | 21.99          | 47.96           | 88.20          | -40.24      | peak   |
| 6   | 17982.000       | 22.98          | 27.96          | 50.94           | 74.00          | -23.06      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6875      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

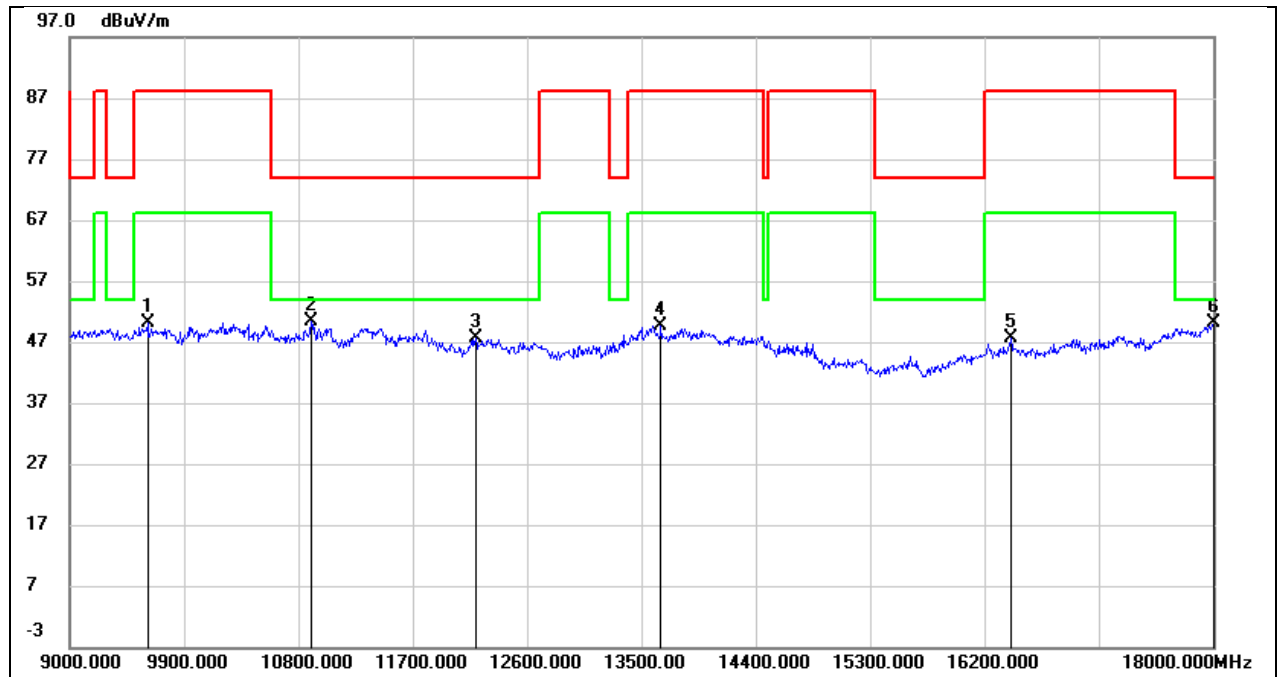


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9612.000        | 36.84          | 13.23          | 50.07           | 88.20          | -38.13      | peak   |
| 2   | 10899.000       | 34.66          | 15.63          | 50.29           | 74.00          | -23.71      | peak   |
| 3   | 12195.000       | 28.45          | 19.10          | 47.55           | 74.00          | -26.45      | peak   |
| 4   | 13653.000       | 26.84          | 22.87          | 49.71           | 88.20          | -38.49      | peak   |
| 5   | 16407.000       | 25.61          | 21.95          | 47.56           | 88.20          | -40.64      | peak   |
| 6   | 18000.000       | 22.08          | 28.10          | 50.18           | 74.00          | -23.82      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 6875      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

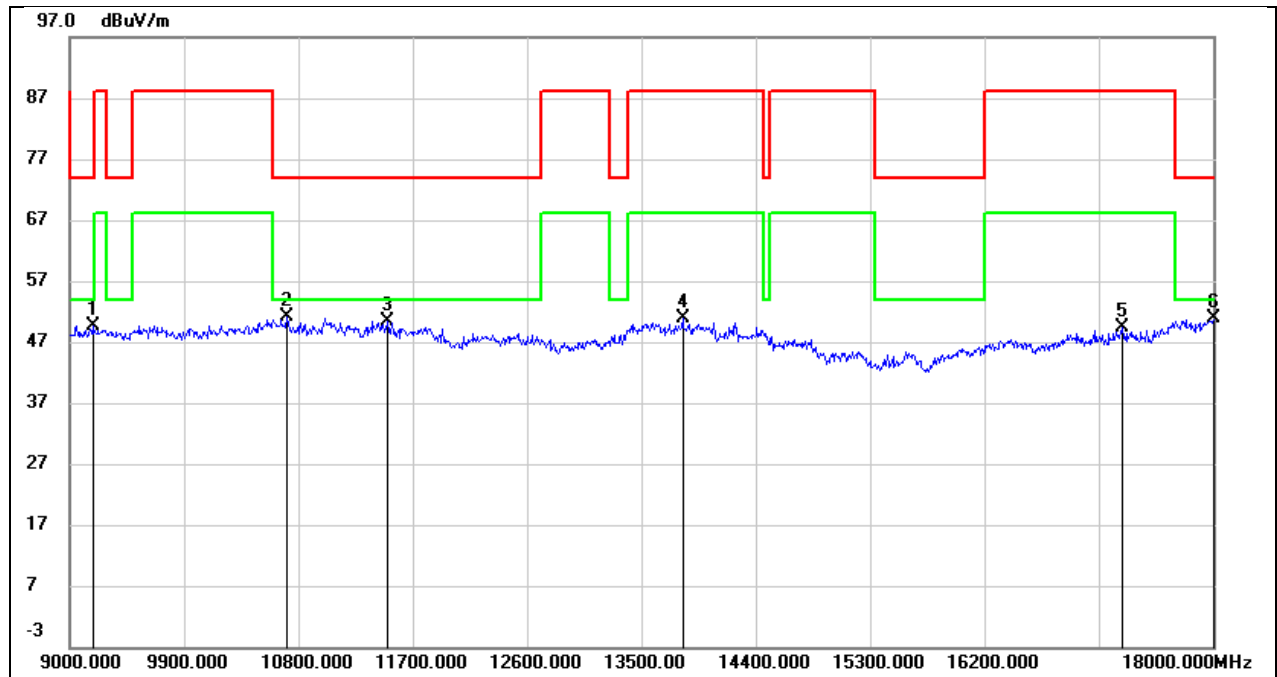


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9180.000        | 38.36          | 11.23          | 49.59           | 74.00          | -24.41      | peak   |
| 2   | 10710.000       | 35.85          | 15.23          | 51.08           | 74.00          | -22.92      | peak   |
| 3   | 11502.000       | 32.52          | 17.81          | 50.33           | 74.00          | -23.67      | peak   |
| 4   | 13824.000       | 27.81          | 23.14          | 50.95           | 88.20          | -37.25      | peak   |
| 5   | 17289.000       | 25.61          | 23.87          | 49.48           | 88.20          | -38.72      | peak   |
| 6   | 18000.000       | 22.70          | 28.10          | 50.80           | 74.00          | -23.20      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7015      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

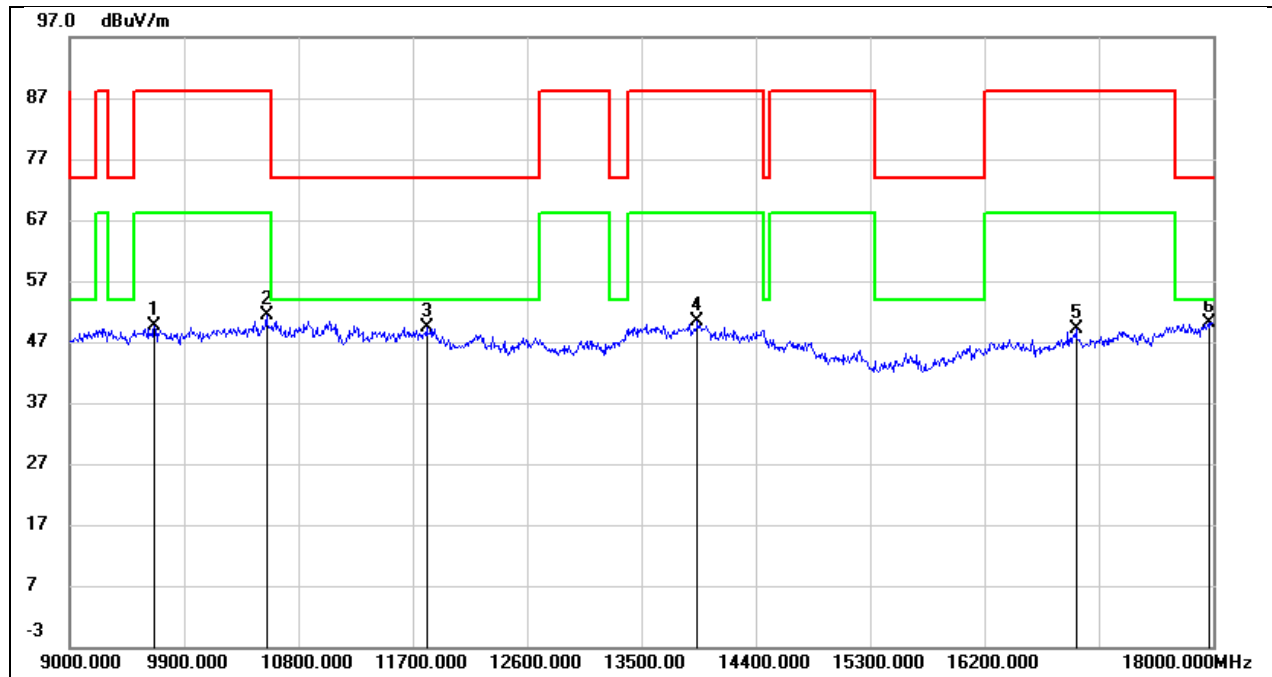


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9666.000        | 36.24          | 13.39          | 49.63           | 88.20          | -38.57      | peak   |
| 2   | 10548.000       | 36.56          | 14.80          | 51.36           | 88.20          | -36.84      | peak   |
| 3   | 11808.000       | 30.92          | 18.50          | 49.42           | 74.00          | -24.58      | peak   |
| 4   | 13941.000       | 26.94          | 23.40          | 50.34           | 88.20          | -37.86      | peak   |
| 5   | 16920.000       | 26.36          | 22.76          | 49.12           | 88.20          | -39.08      | peak   |
| 6   | 17964.000       | 22.37          | 27.81          | 50.18           | 74.00          | -23.82      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7015      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

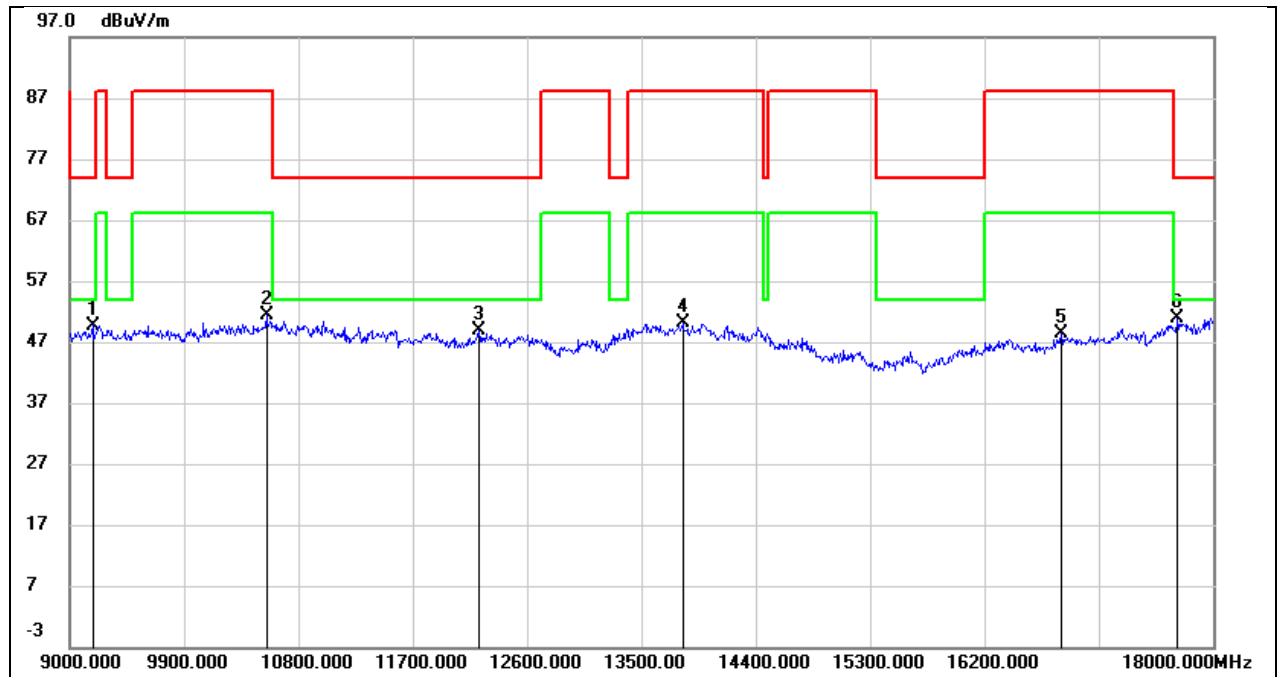


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9180.000        | 38.52          | 11.23          | 49.75           | 74.00          | -24.25      | peak   |
| 2   | 10548.000       | 36.46          | 14.80          | 51.26           | 88.20          | -36.94      | peak   |
| 3   | 12222.000       | 29.76          | 19.16          | 48.92           | 74.00          | -25.08      | peak   |
| 4   | 13824.000       | 26.95          | 23.14          | 50.09           | 88.20          | -38.11      | peak   |
| 5   | 16803.000       | 26.03          | 22.28          | 48.31           | 88.20          | -39.89      | peak   |
| 6   | 17721.000       | 24.87          | 25.93          | 50.80           | 74.00          | -23.20      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal | Test Voltage:   | DC 3.635V |

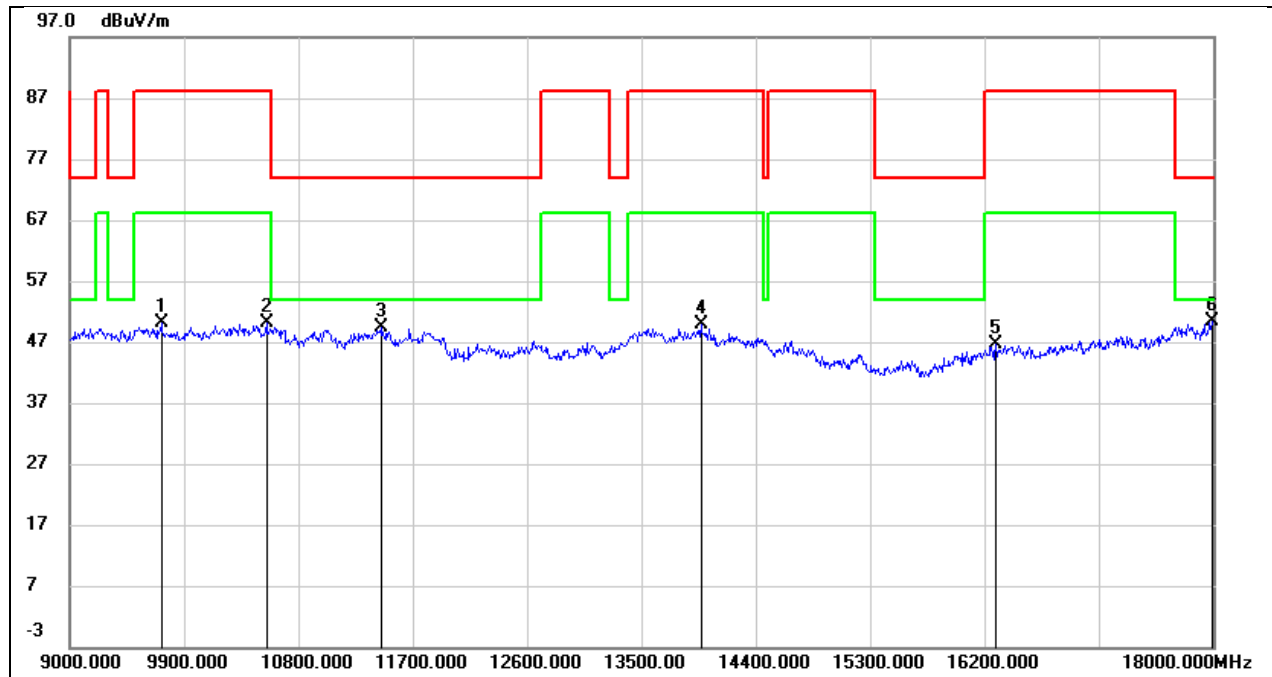


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9720.000        | 36.71          | 13.53          | 50.24           | 88.20          | -37.96      | peak   |
| 2   | 10548.000       | 35.22          | 14.80          | 50.02           | 88.20          | -38.18      | peak   |
| 3   | 11457.000       | 31.88          | 17.60          | 49.48           | 74.00          | -24.52      | peak   |
| 4   | 13968.000       | 26.48          | 23.47          | 49.95           | 88.20          | -38.25      | peak   |
| 5   | 16290.000       | 24.53          | 22.08          | 46.61           | 88.20          | -41.59      | peak   |
| 6   | 17991.000       | 22.36          | 28.02          | 50.38           | 74.00          | -23.62      | peak   |

|            |            |                 |           |
|------------|------------|-----------------|-----------|
| Test Mode: | 802.11a 20 | Frequency(MHz): | 7115      |
| Polarity:  | Vertical   | Test Voltage:   | DC 3.635V |

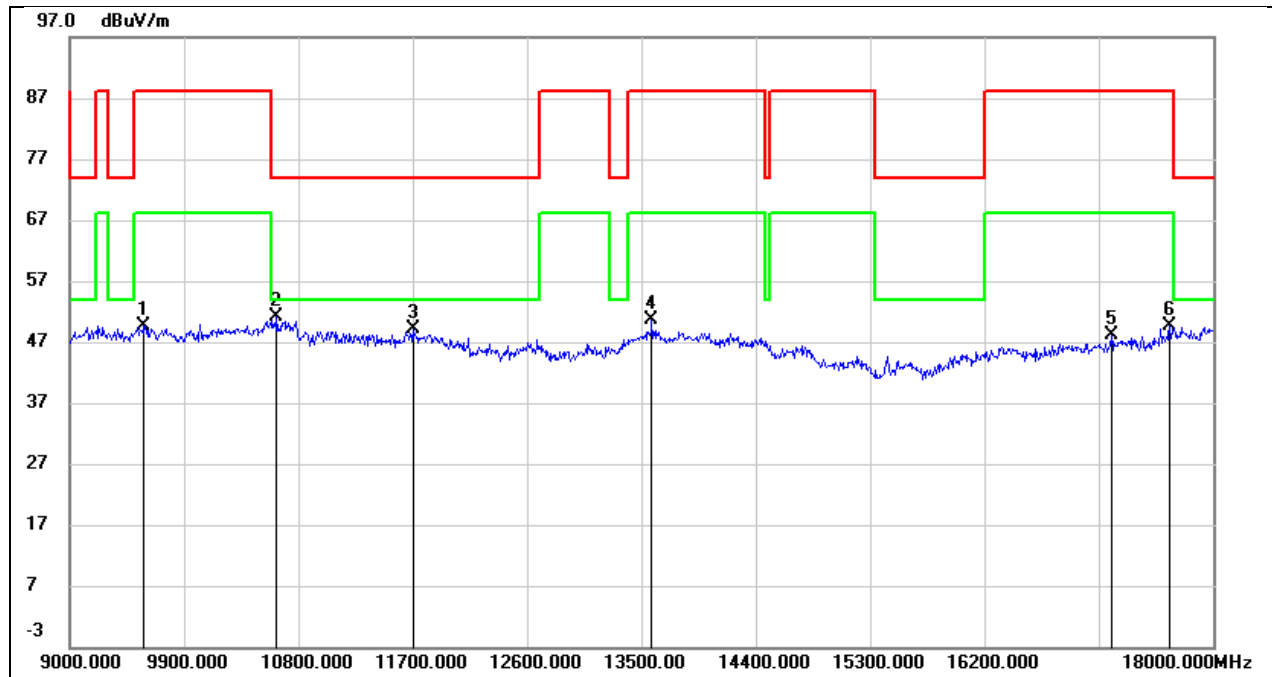


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.62          | 13.11          | 49.73           | 88.20          | -38.47      | peak   |
| 2   | 10629.000       | 36.05          | 15.04          | 51.09           | 74.00          | -22.91      | peak   |
| 3   | 11700.000       | 30.63          | 18.40          | 49.03           | 74.00          | -24.97      | peak   |
| 4   | 13581.000       | 27.85          | 22.76          | 50.61           | 88.20          | -37.59      | peak   |
| 5   | 17199.000       | 24.49          | 23.64          | 48.13           | 88.20          | -40.07      | peak   |
| 6   | 17658.000       | 24.06          | 25.50          | 49.56           | 88.20          | -38.64      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

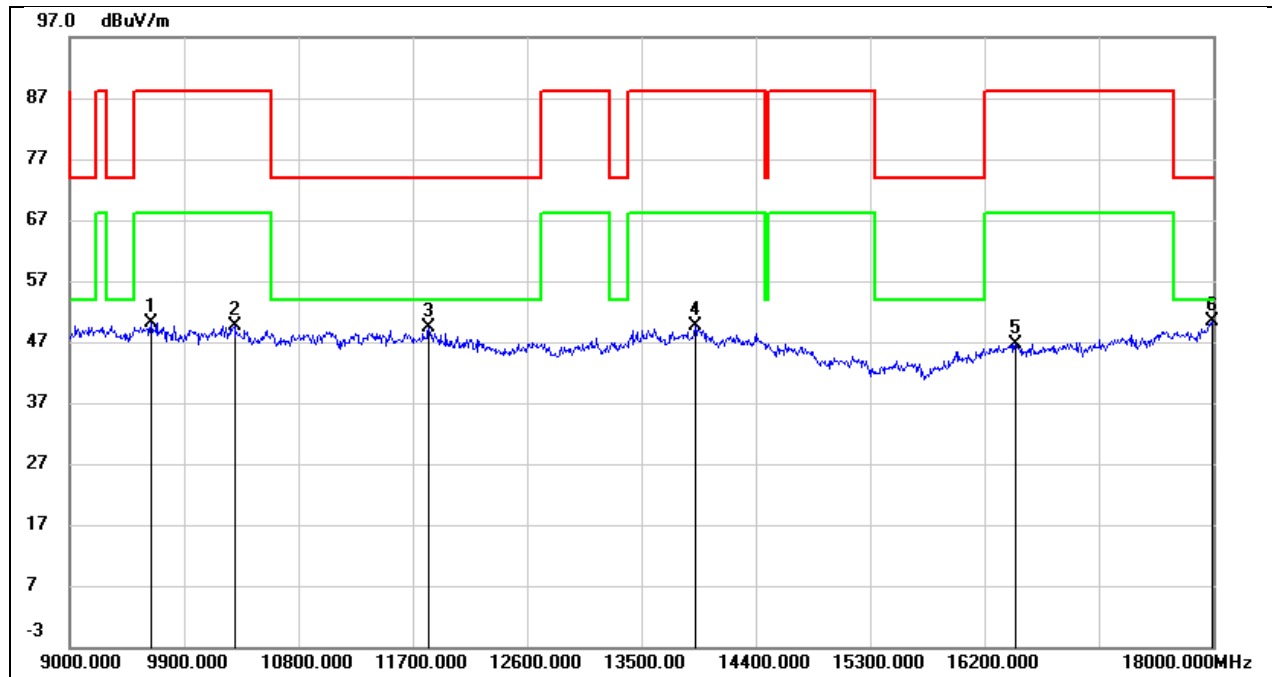


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9639.000        | 36.58          | 13.48          | 50.06           | 88.20          | -38.14      | peak   |
| 2   | 10296.000       | 35.81          | 13.76          | 49.57           | 88.20          | -38.63      | peak   |
| 3   | 11826.000       | 30.92          | 18.58          | 49.50           | 74.00          | -24.50      | peak   |
| 4   | 13923.000       | 26.65          | 23.05          | 49.70           | 88.20          | -38.50      | peak   |
| 5   | 16443.000       | 24.08          | 22.64          | 46.72           | 88.20          | -41.48      | peak   |
| 6   | 17991.000       | 21.28          | 29.11          | 50.39           | 74.00          | -23.61      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

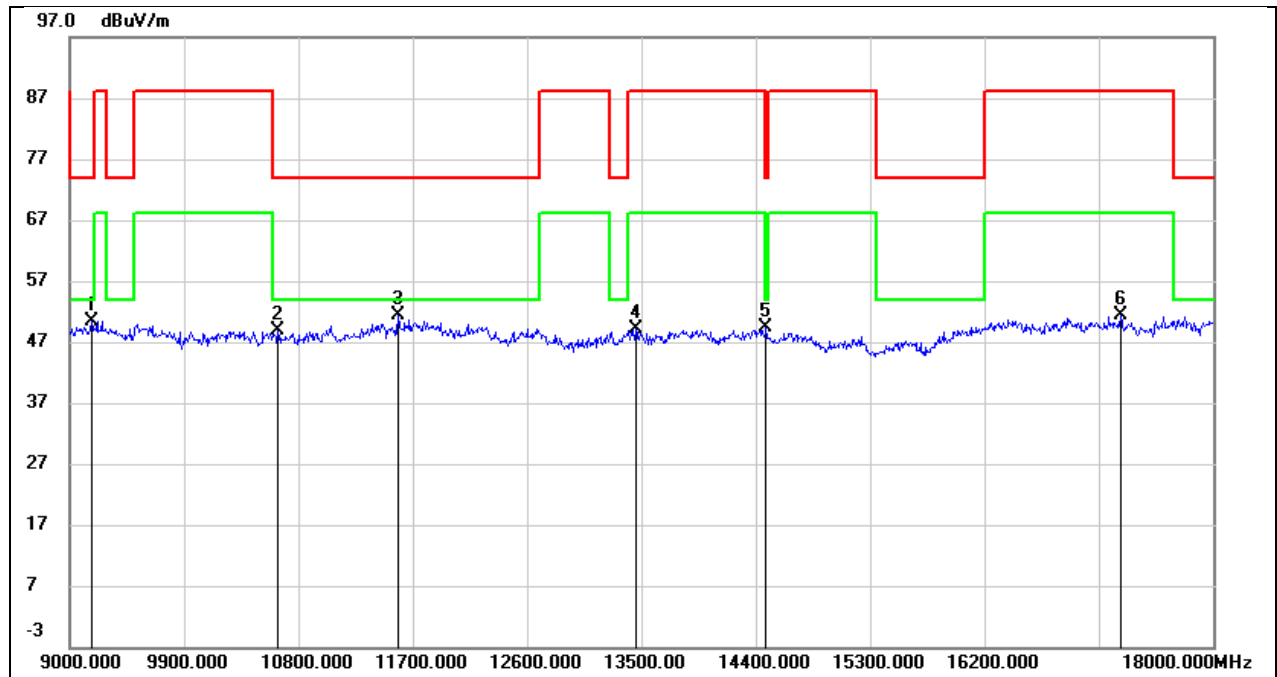


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9171.000        | 38.89          | 11.61          | 50.50           | 74.00          | -23.50      | peak   |
| 2   | 10638.000       | 34.63          | 14.22          | 48.85           | 74.00          | -25.15      | peak   |
| 3   | 11583.000       | 34.24          | 17.03          | 51.27           | 74.00          | -22.73      | peak   |
| 4   | 13455.000       | 28.80          | 20.41          | 49.21           | 88.20          | -38.99      | peak   |
| 5   | 14481.000       | 28.46          | 21.00          | 49.46           | 74.00          | -24.54      | peak   |
| 6   | 17271.000       | 26.47          | 24.83          | 51.30           | 88.20          | -36.90      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6175      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

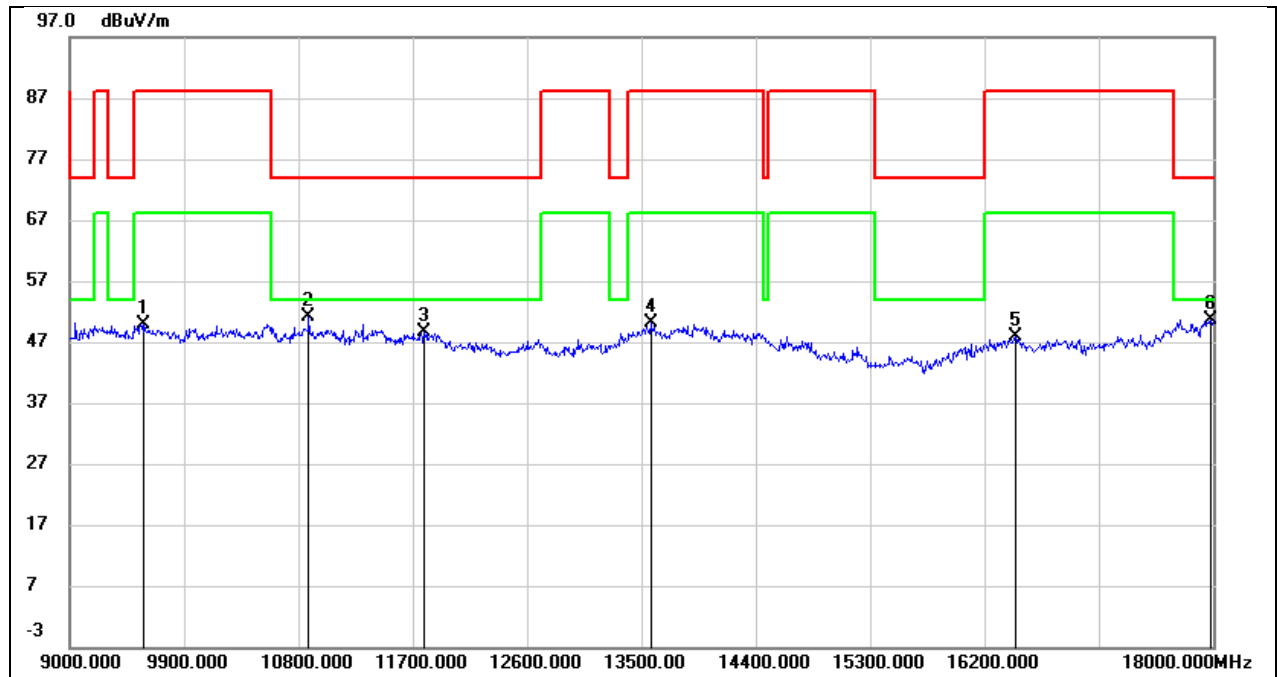


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.68          | 13.30          | 49.98           | 88.20          | -38.22      | peak   |
| 2   | 10881.000       | 35.87          | 15.17          | 51.04           | 74.00          | -22.96      | peak   |
| 3   | 11790.000       | 30.12          | 18.54          | 48.66           | 74.00          | -25.34      | peak   |
| 4   | 13572.000       | 27.74          | 22.37          | 50.11           | 88.20          | -38.09      | peak   |
| 5   | 16443.000       | 25.17          | 22.64          | 47.81           | 88.20          | -40.39      | peak   |
| 6   | 17982.000       | 21.69          | 29.03          | 50.72           | 74.00          | -23.28      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6175      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

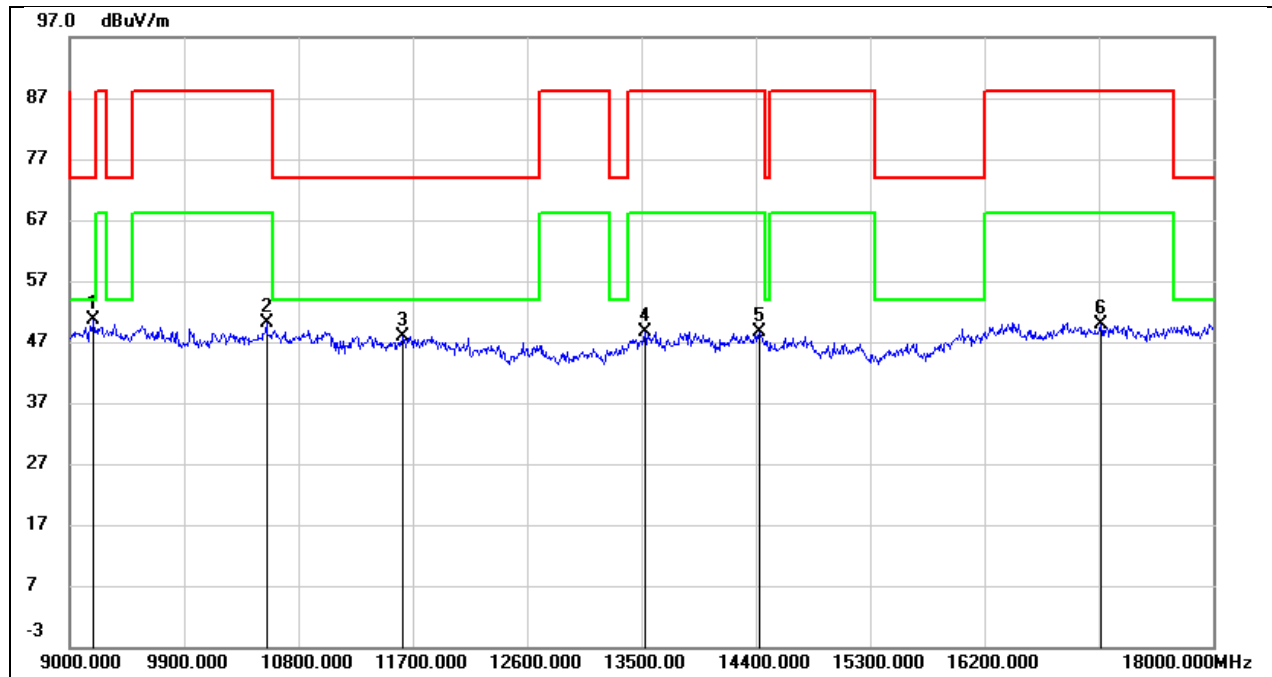


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9189.000        | 38.97          | 11.66          | 50.63           | 74.00          | -23.37      | peak   |
| 2   | 10548.000       | 36.19          | 14.05          | 50.24           | 88.20          | -37.96      | peak   |
| 3   | 11619.000       | 30.85          | 17.14          | 47.99           | 74.00          | -26.01      | peak   |
| 4   | 13527.000       | 27.99          | 20.60          | 48.59           | 88.20          | -39.61      | peak   |
| 5   | 14427.000       | 27.44          | 21.09          | 48.53           | 88.20          | -39.67      | peak   |
| 6   | 17118.000       | 25.10          | 24.80          | 49.90           | 88.20          | -38.30      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6415      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

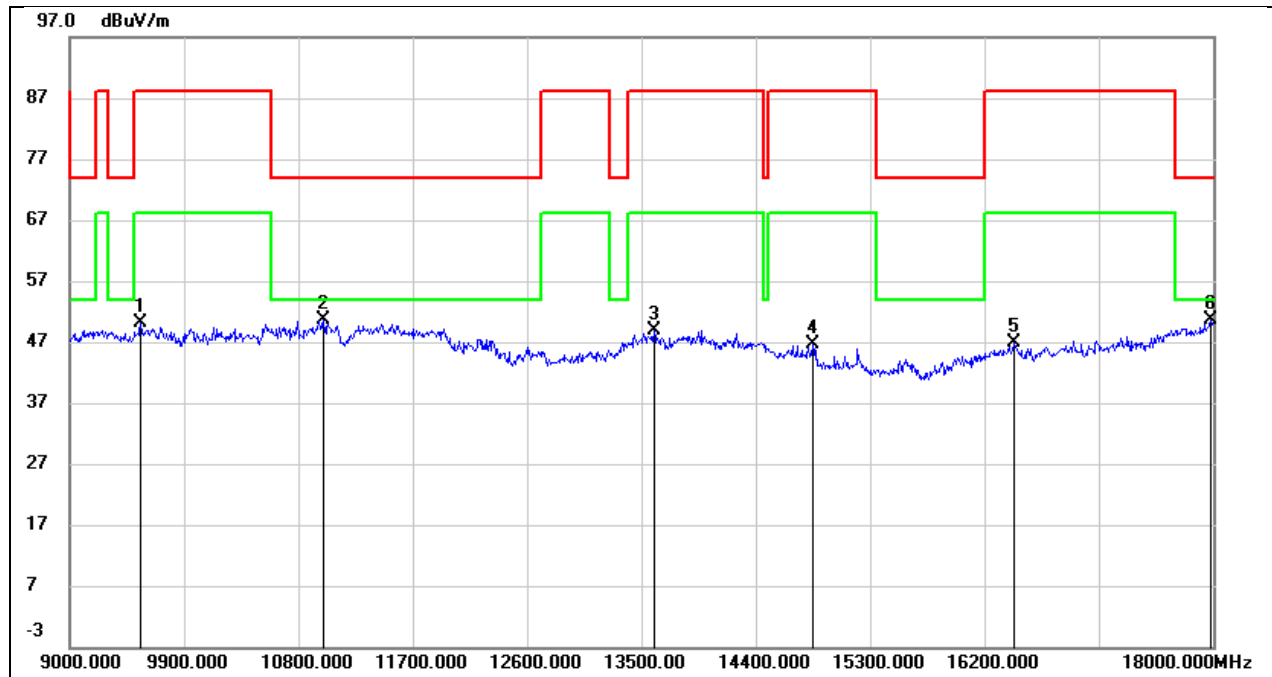


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9558.000        | 36.91          | 13.15          | 50.06           | 88.20          | -38.14      | peak   |
| 2   | 10998.000       | 35.08          | 15.45          | 50.53           | 74.00          | -23.47      | peak   |
| 3   | 13599.000       | 26.42          | 22.42          | 48.84           | 88.20          | -39.36      | peak   |
| 4   | 14850.000       | 26.77          | 19.76          | 46.53           | 88.20          | -41.67      | peak   |
| 5   | 16434.000       | 24.34          | 22.65          | 46.99           | 88.20          | -41.21      | peak   |
| 6   | 17982.000       | 21.71          | 29.03          | 50.74           | 74.00          | -23.26      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6415      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

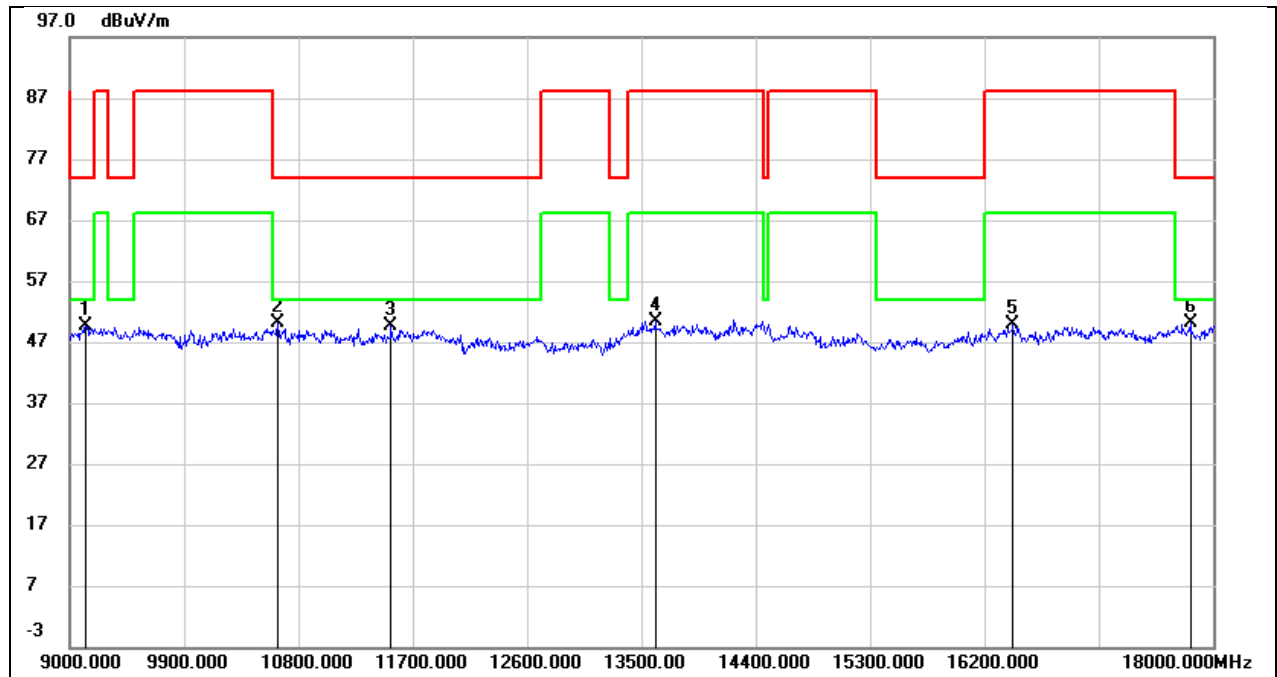


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9126.000        | 38.21          | 11.49          | 49.70           | 74.00          | -24.30      | peak   |
| 2   | 10638.000       | 35.85          | 14.22          | 50.07           | 74.00          | -23.93      | peak   |
| 3   | 11529.000       | 32.75          | 16.76          | 49.51           | 74.00          | -24.49      | peak   |
| 4   | 13608.000       | 29.70          | 20.75          | 50.45           | 88.20          | -37.75      | peak   |
| 5   | 16425.000       | 25.46          | 24.44          | 49.90           | 88.20          | -38.30      | peak   |
| 6   | 17820.000       | 23.95          | 26.07          | 50.02           | 74.00          | -23.98      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6435      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

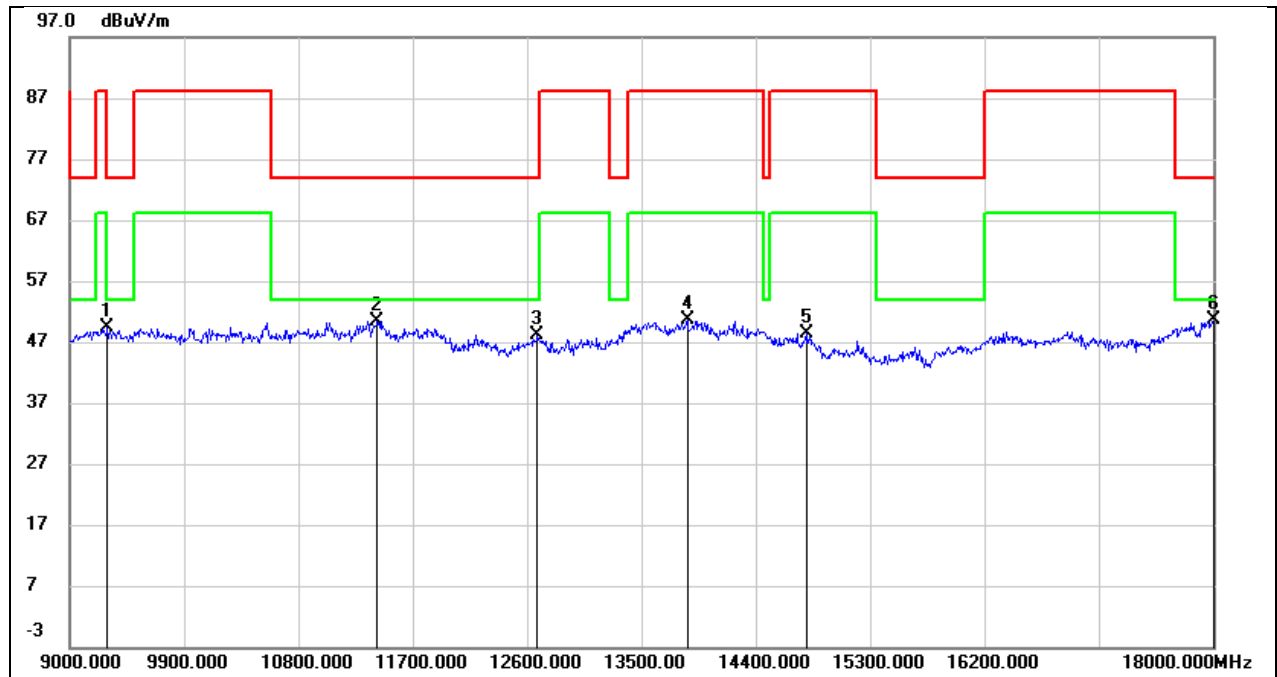


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9297.000        | 37.49          | 11.81          | 49.30           | 88.20          | -38.90      | peak   |
| 2   | 11421.000       | 32.75          | 17.61          | 50.36           | 74.00          | -23.64      | peak   |
| 3   | 12681.000       | 28.92          | 19.10          | 48.02           | 74.00          | -25.98      | peak   |
| 4   | 13860.000       | 27.62          | 22.89          | 50.51           | 88.20          | -37.69      | peak   |
| 5   | 14796.000       | 28.45          | 19.98          | 48.43           | 88.20          | -39.77      | peak   |
| 6   | 18000.000       | 21.41          | 29.20          | 50.61           | 74.00          | -23.39      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6435      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

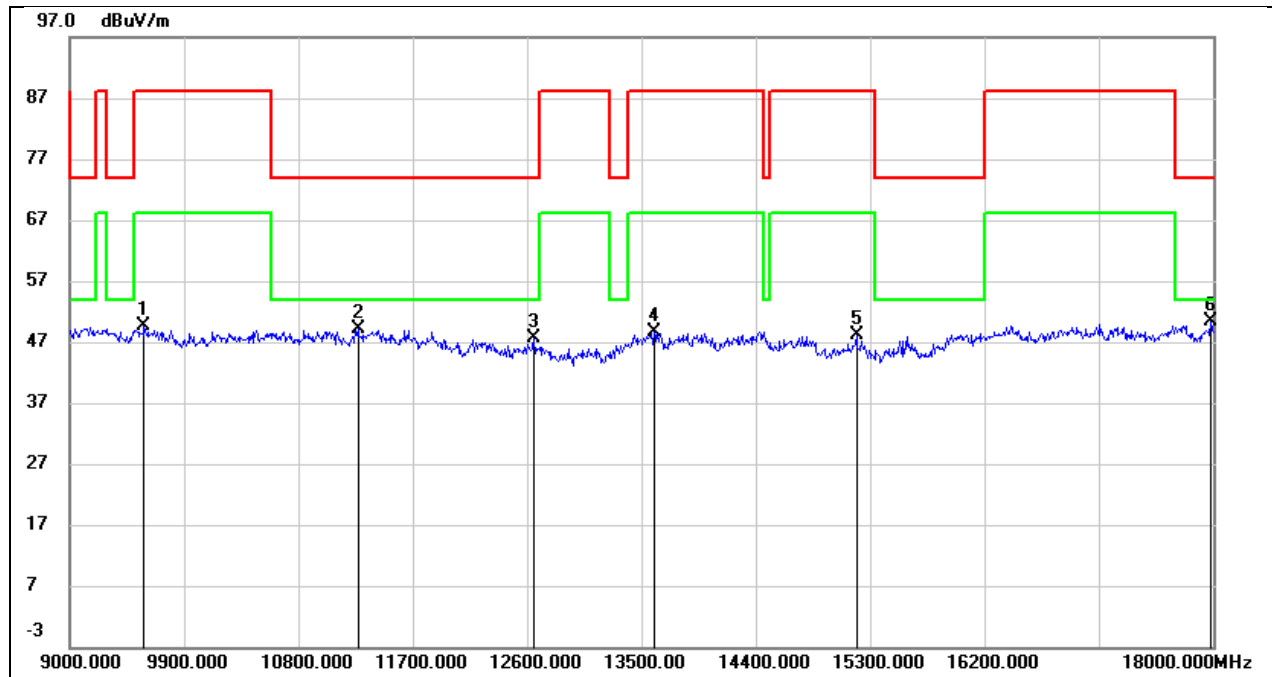


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.40          | 13.18          | 49.58           | 88.20          | -38.62      | peak   |
| 2   | 11268.000       | 33.45          | 15.59          | 49.04           | 74.00          | -24.96      | peak   |
| 3   | 12654.000       | 29.63          | 18.03          | 47.66           | 74.00          | -26.34      | peak   |
| 4   | 13599.000       | 27.95          | 20.74          | 48.69           | 88.20          | -39.51      | peak   |
| 5   | 15192.000       | 28.31          | 19.87          | 48.18           | 88.20          | -40.02      | peak   |
| 6   | 17982.000       | 23.52          | 26.91          | 50.43           | 74.00          | -23.57      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6475      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

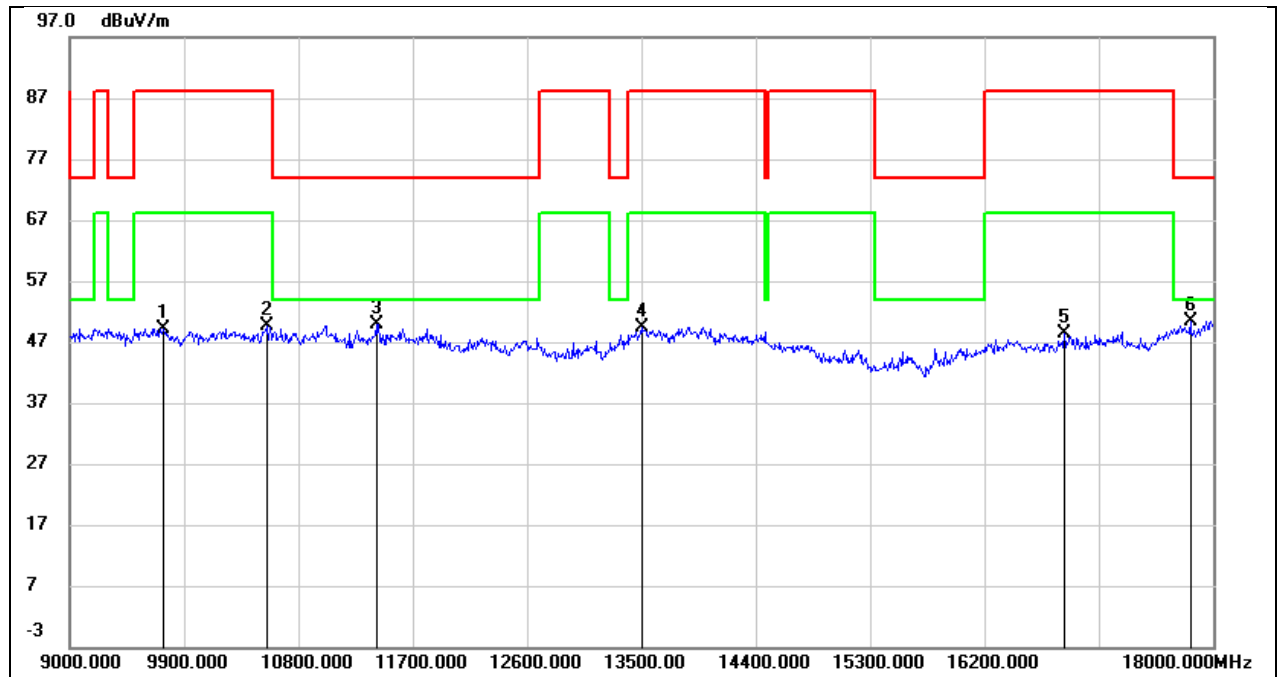


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9738.000        | 35.51          | 13.73          | 49.24           | 88.20          | -38.96      | peak   |
| 2   | 10548.000       | 35.42          | 14.31          | 49.73           | 88.20          | -38.47      | peak   |
| 3   | 11412.000       | 32.33          | 17.55          | 49.88           | 74.00          | -24.12      | peak   |
| 4   | 13500.000       | 27.20          | 22.24          | 49.44           | 88.20          | -38.76      | peak   |
| 5   | 16830.000       | 25.60          | 22.67          | 48.27           | 88.20          | -39.93      | peak   |
| 6   | 17820.000       | 23.00          | 27.48          | 50.48           | 74.00          | -23.52      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6475      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

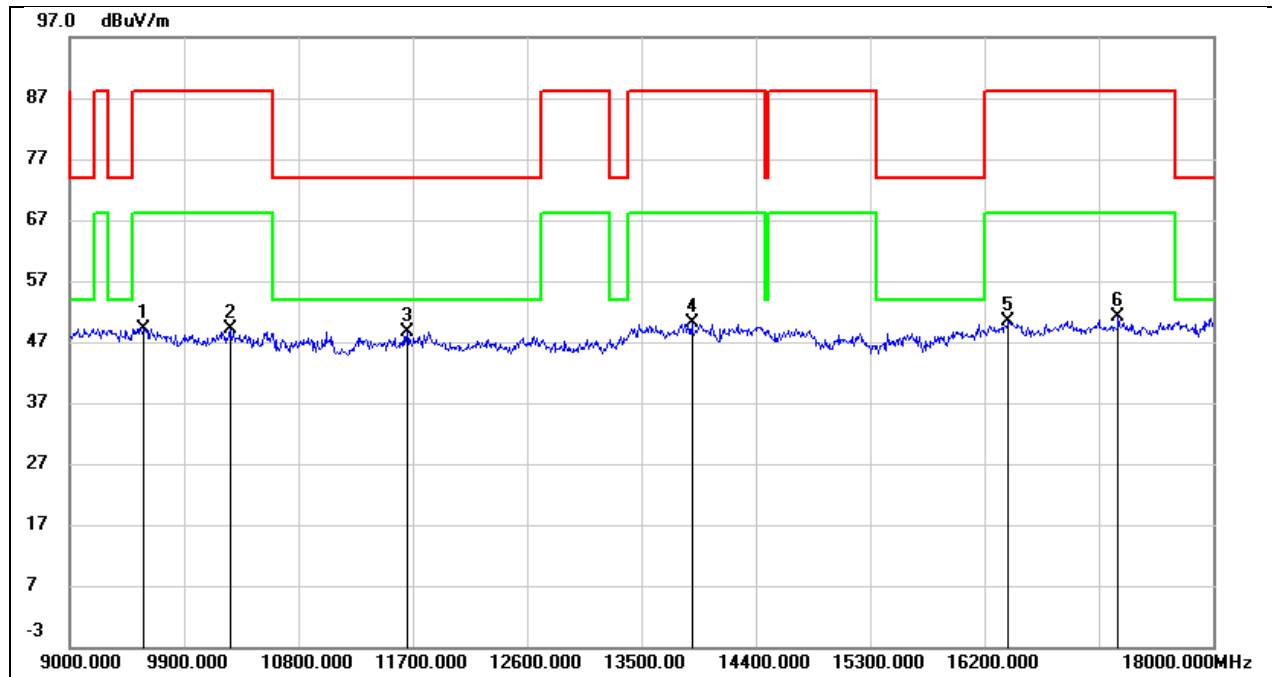


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.03          | 13.18          | 49.21           | 88.20          | -38.99      | peak   |
| 2   | 10260.000       | 35.80          | 13.28          | 49.08           | 88.20          | -39.12      | peak   |
| 3   | 11655.000       | 31.51          | 17.17          | 48.68           | 74.00          | -25.32      | peak   |
| 4   | 13896.000       | 28.71          | 21.36          | 50.07           | 88.20          | -38.13      | peak   |
| 5   | 16389.000       | 25.78          | 24.49          | 50.27           | 88.20          | -37.93      | peak   |
| 6   | 17253.000       | 26.27          | 24.82          | 51.09           | 88.20          | -37.11      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6515      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

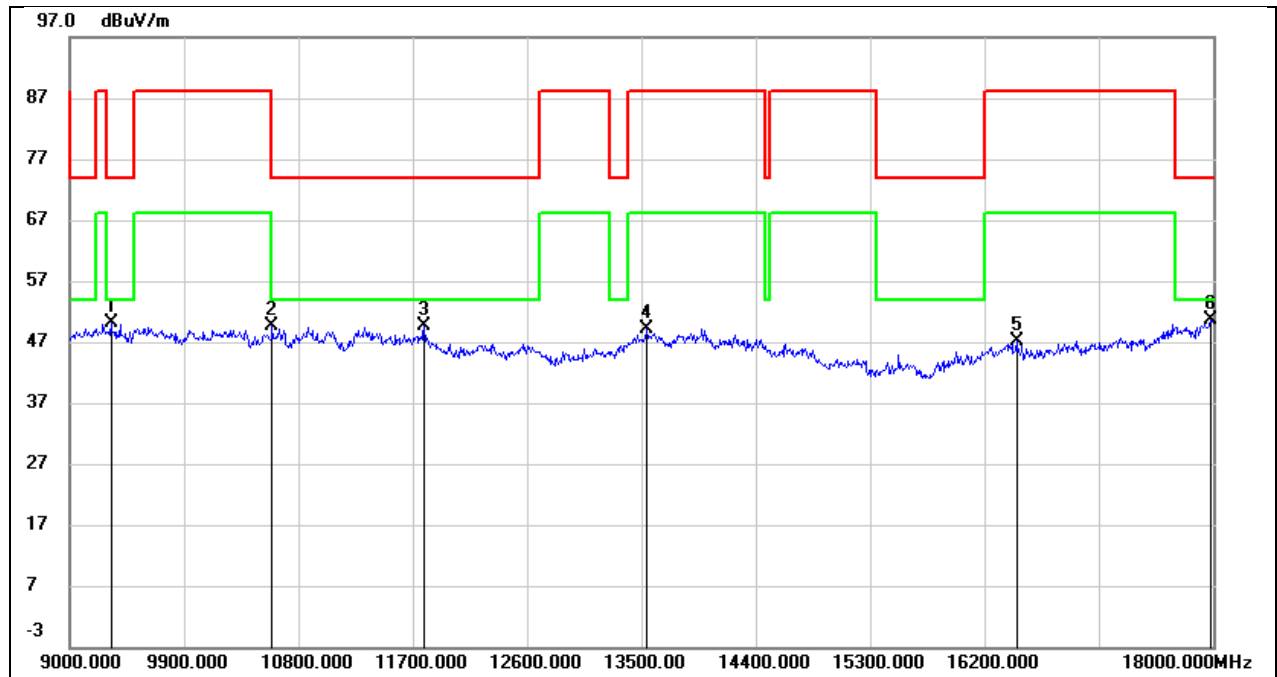


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9324.000        | 38.21          | 11.91          | 50.12           | 74.00          | -23.88      | peak   |
| 2   | 10593.000       | 35.26          | 14.48          | 49.74           | 88.20          | -38.46      | peak   |
| 3   | 11790.000       | 31.02          | 18.54          | 49.56           | 74.00          | -24.44      | peak   |
| 4   | 13545.000       | 26.73          | 22.32          | 49.05           | 88.20          | -39.15      | peak   |
| 5   | 16452.000       | 24.53          | 22.64          | 47.17           | 88.20          | -41.03      | peak   |
| 6   | 17982.000       | 21.52          | 29.03          | 50.55           | 74.00          | -23.45      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6515      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

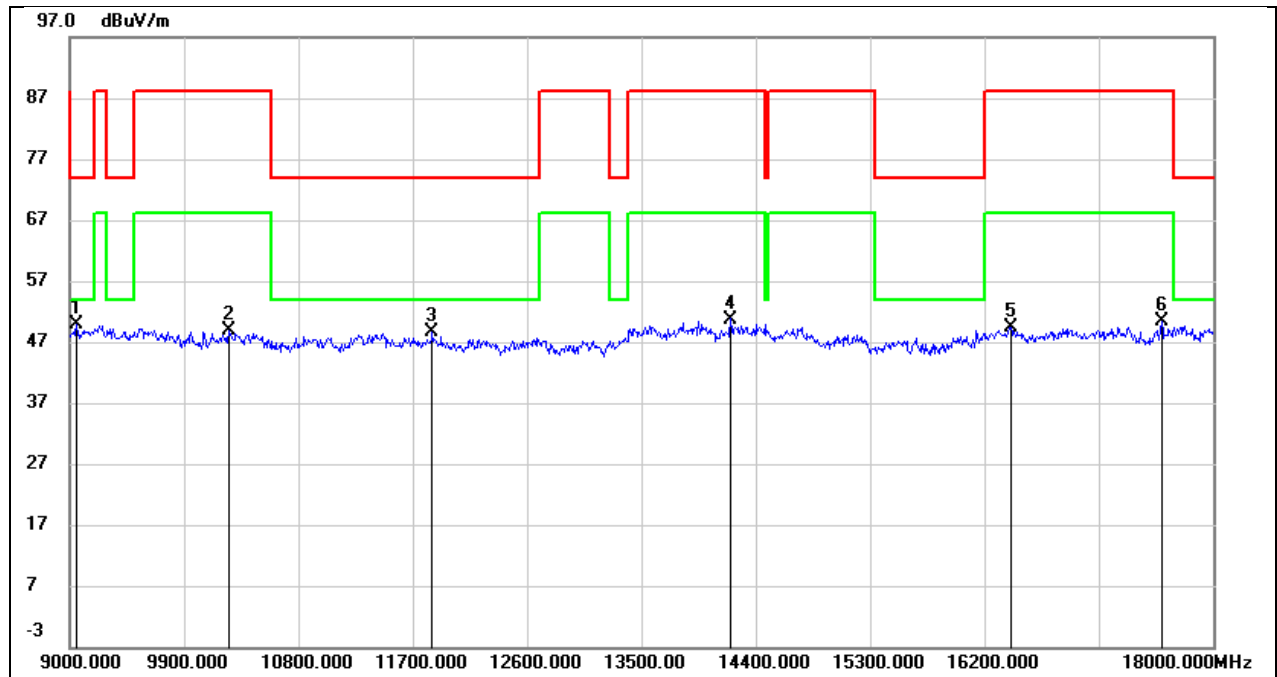


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9054.000        | 38.48          | 11.32          | 49.80           | 74.00          | -24.20      | peak   |
| 2   | 10251.000       | 35.51          | 13.25          | 48.76           | 88.20          | -39.44      | peak   |
| 3   | 11853.000       | 31.12          | 17.39          | 48.51           | 74.00          | -25.49      | peak   |
| 4   | 14202.000       | 29.29          | 21.46          | 50.75           | 88.20          | -37.45      | peak   |
| 5   | 16407.000       | 24.88          | 24.47          | 49.35           | 88.20          | -38.85      | peak   |
| 6   | 17595.000       | 25.12          | 25.18          | 50.30           | 88.20          | -37.90      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6535      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

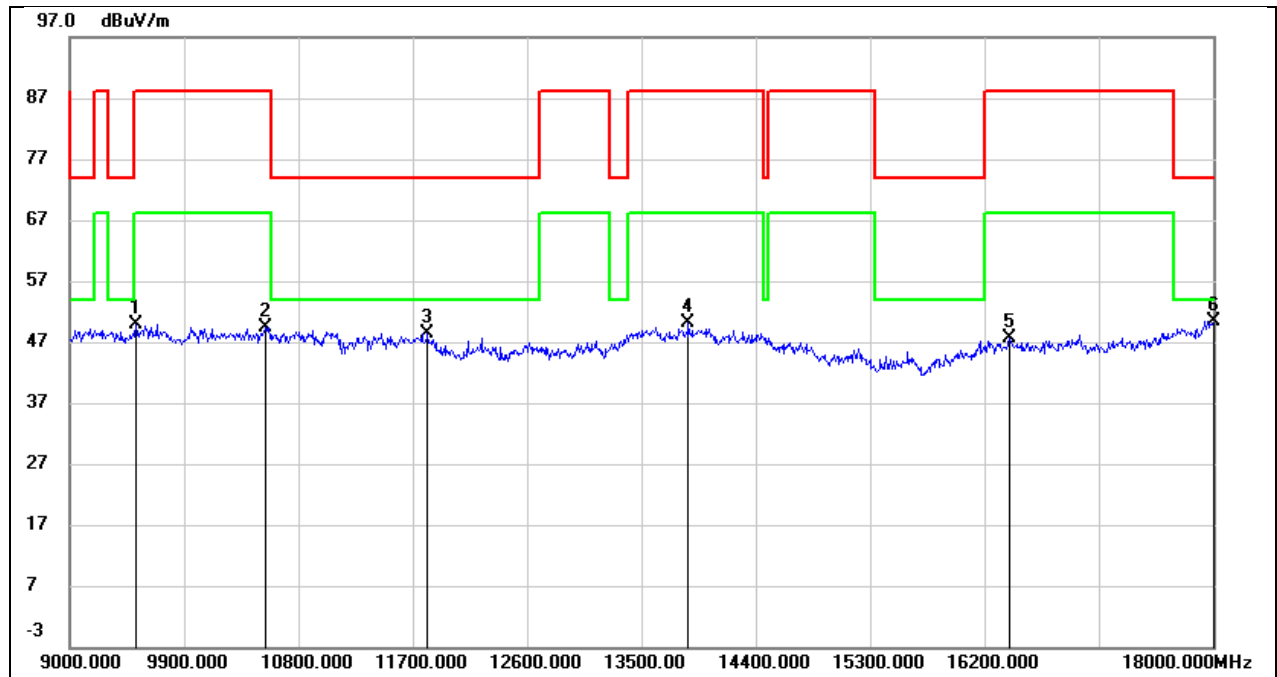


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9522.000        | 36.90          | 12.94          | 49.84           | 88.20          | -38.36      | peak   |
| 2   | 10539.000       | 35.15          | 14.27          | 49.42           | 88.20          | -38.78      | peak   |
| 3   | 11817.000       | 29.85          | 18.56          | 48.41           | 74.00          | -25.59      | peak   |
| 4   | 13869.000       | 27.14          | 22.91          | 50.05           | 88.20          | -38.15      | peak   |
| 5   | 16398.000       | 24.97          | 22.64          | 47.61           | 88.20          | -40.59      | peak   |
| 6   | 18000.000       | 21.17          | 29.20          | 50.37           | 74.00          | -23.63      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6535      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

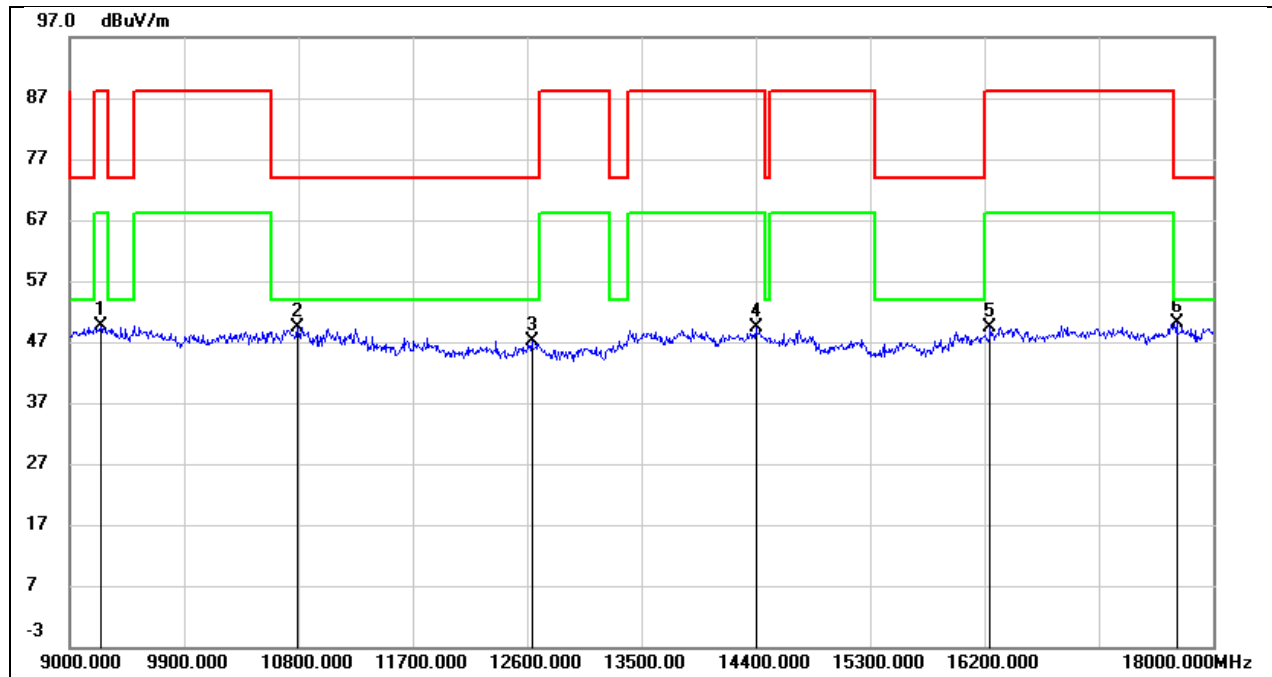


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9243.000        | 37.81          | 11.81          | 49.62           | 88.20          | -38.58      | peak   |
| 2   | 10791.000       | 34.89          | 14.41          | 49.30           | 74.00          | -24.70      | peak   |
| 3   | 12636.000       | 29.12          | 18.00          | 47.12           | 74.00          | -26.88      | peak   |
| 4   | 14400.000       | 28.24          | 21.14          | 49.38           | 88.20          | -38.82      | peak   |
| 5   | 16245.000       | 24.77          | 24.69          | 49.46           | 88.20          | -38.74      | peak   |
| 6   | 17712.000       | 24.48          | 25.64          | 50.12           | 74.00          | -23.88      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6715      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

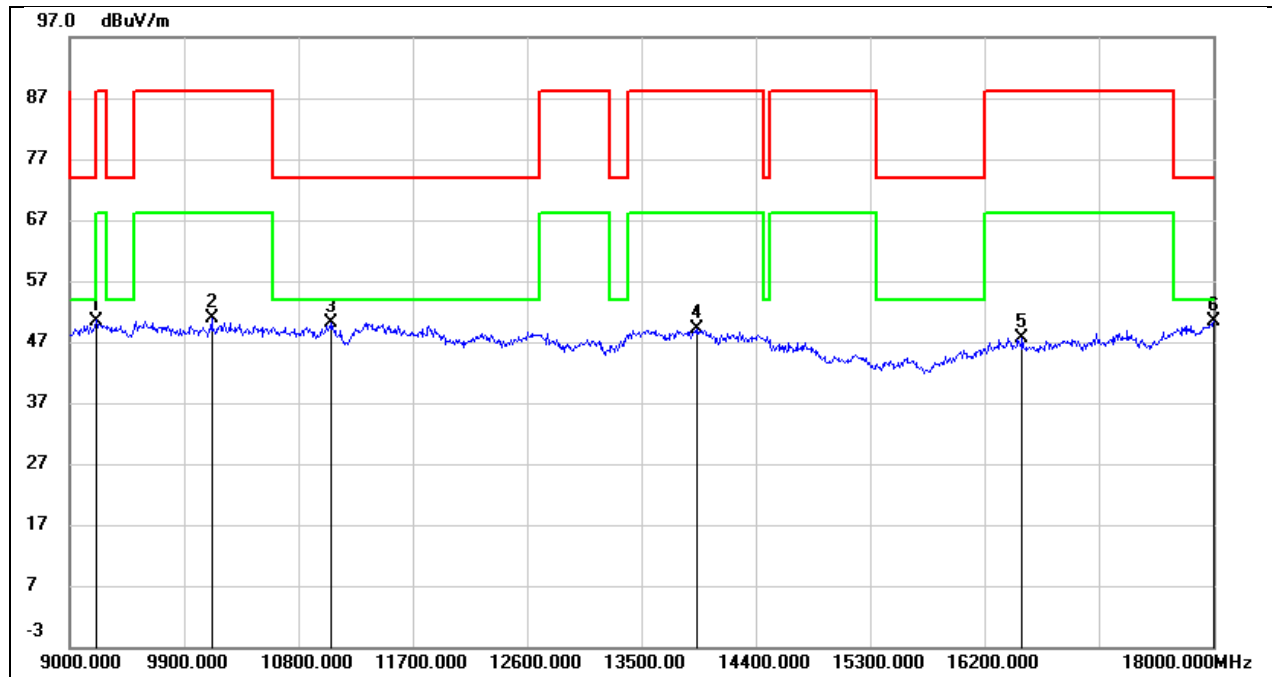


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9207.000        | 39.03          | 11.47          | 50.50           | 88.20          | -37.70      | peak   |
| 2   | 10116.000       | 37.07          | 13.69          | 50.76           | 88.20          | -37.44      | peak   |
| 3   | 11052.000       | 34.44          | 15.69          | 50.13           | 74.00          | -23.87      | peak   |
| 4   | 13941.000       | 25.94          | 23.09          | 49.03           | 88.20          | -39.17      | peak   |
| 5   | 16497.000       | 24.88          | 22.65          | 47.53           | 88.20          | -40.67      | peak   |
| 6   | 18000.000       | 21.30          | 29.20          | 50.50           | 74.00          | -23.50      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6715      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

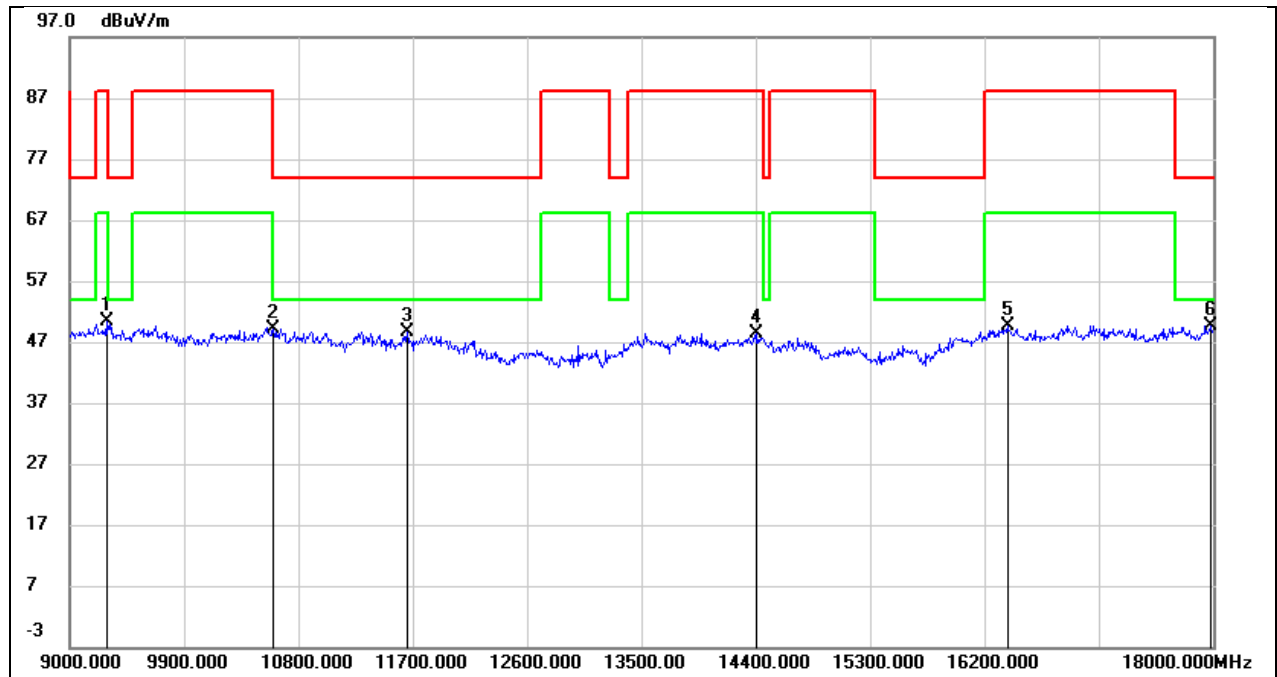


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9288.000        | 38.44          | 11.93          | 50.37           | 88.20          | -37.83      | peak   |
| 2   | 10602.000       | 34.90          | 14.18          | 49.08           | 74.00          | -24.92      | peak   |
| 3   | 11655.000       | 31.38          | 17.17          | 48.55           | 74.00          | -25.45      | peak   |
| 4   | 14409.000       | 27.37          | 21.12          | 48.49           | 88.20          | -39.71      | peak   |
| 5   | 16380.000       | 25.23          | 24.51          | 49.74           | 88.20          | -38.46      | peak   |
| 6   | 17982.000       | 22.78          | 26.91          | 49.69           | 74.00          | -24.31      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6855      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

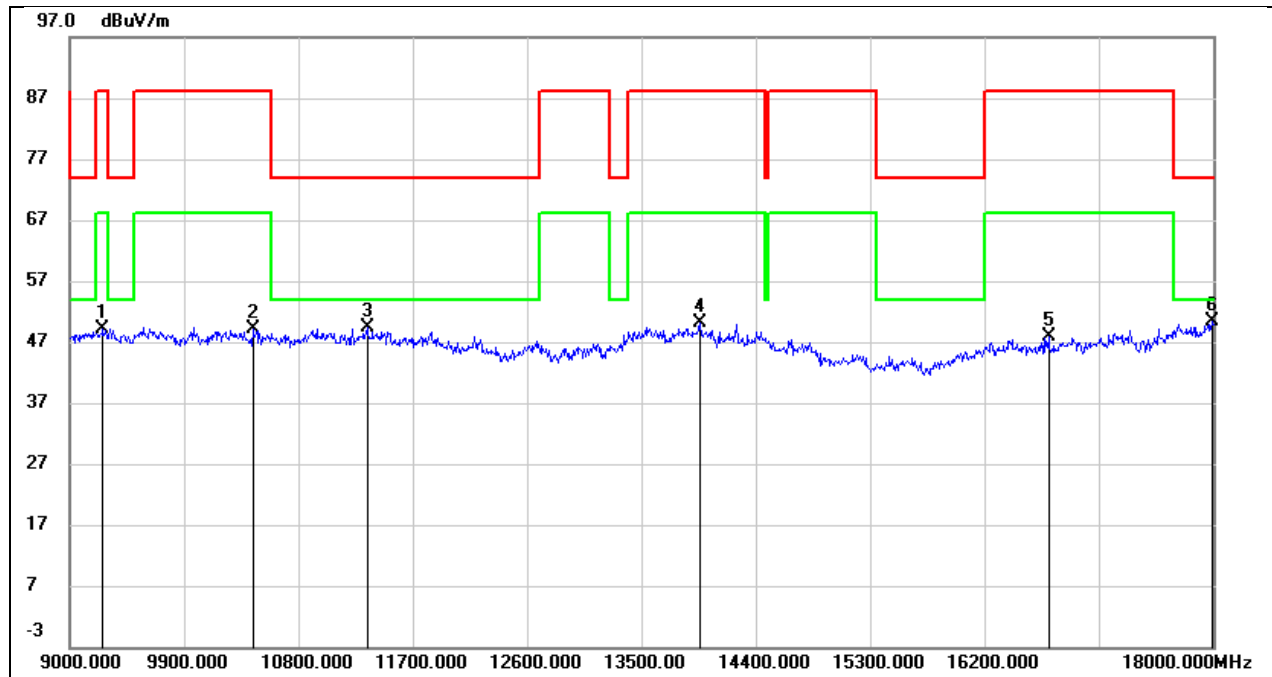


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9261.000        | 37.55          | 11.67          | 49.22           | 88.20          | -38.98      | peak   |
| 2   | 10440.000       | 35.04          | 13.98          | 49.02           | 88.20          | -39.18      | peak   |
| 3   | 11340.000       | 32.15          | 17.15          | 49.30           | 74.00          | -24.70      | peak   |
| 4   | 13959.000       | 27.09          | 23.14          | 50.23           | 88.20          | -37.97      | peak   |
| 5   | 16704.000       | 25.29          | 22.54          | 47.83           | 88.20          | -40.37      | peak   |
| 6   | 17991.000       | 21.19          | 29.11          | 50.30           | 74.00          | -23.70      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6855      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

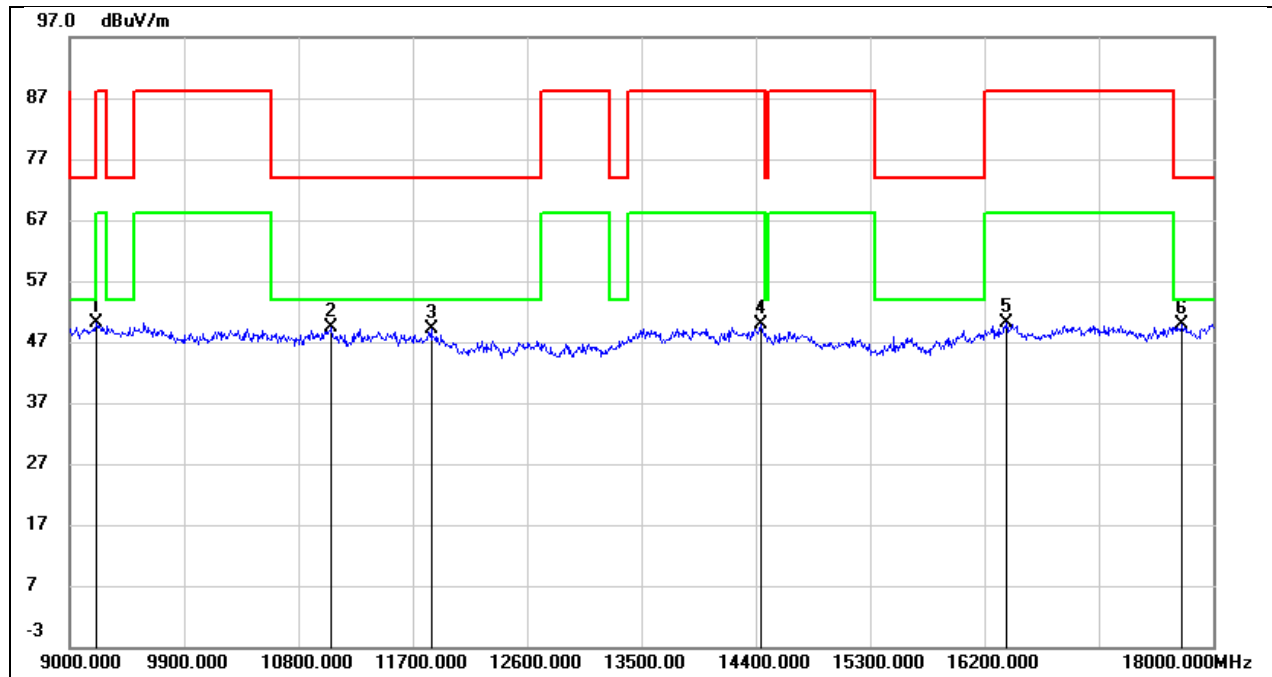


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9207.000        | 38.33          | 11.71          | 50.04           | 88.20          | -38.16      | peak   |
| 2   | 11061.000       | 34.55          | 14.86          | 49.41           | 74.00          | -24.59      | peak   |
| 3   | 11844.000       | 31.72          | 17.36          | 49.08           | 74.00          | -24.92      | peak   |
| 4   | 14436.000       | 28.70          | 21.08          | 49.78           | 88.20          | -38.42      | peak   |
| 5   | 16371.000       | 25.57          | 24.51          | 50.08           | 88.20          | -38.12      | peak   |
| 6   | 17757.000       | 24.07          | 25.81          | 49.88           | 74.00          | -24.12      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6875      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

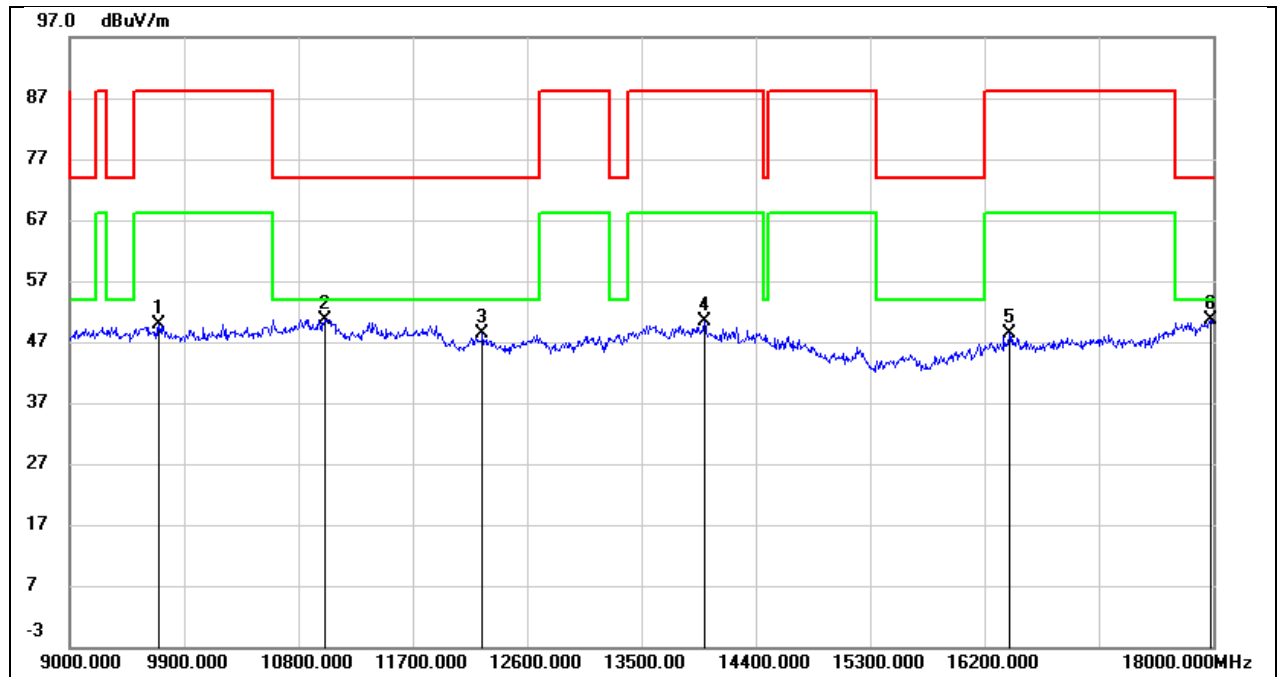


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9702.000        | 36.28          | 13.64          | 49.92           | 88.20          | -38.28      | peak   |
| 2   | 11007.000       | 35.20          | 15.49          | 50.69           | 74.00          | -23.31      | peak   |
| 3   | 12249.000       | 29.72          | 18.77          | 48.49           | 74.00          | -25.51      | peak   |
| 4   | 13995.000       | 27.18          | 23.23          | 50.41           | 88.20          | -37.79      | peak   |
| 5   | 16398.000       | 25.66          | 22.64          | 48.30           | 88.20          | -39.90      | peak   |
| 6   | 17982.000       | 21.68          | 29.03          | 50.71           | 74.00          | -23.29      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 6875      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

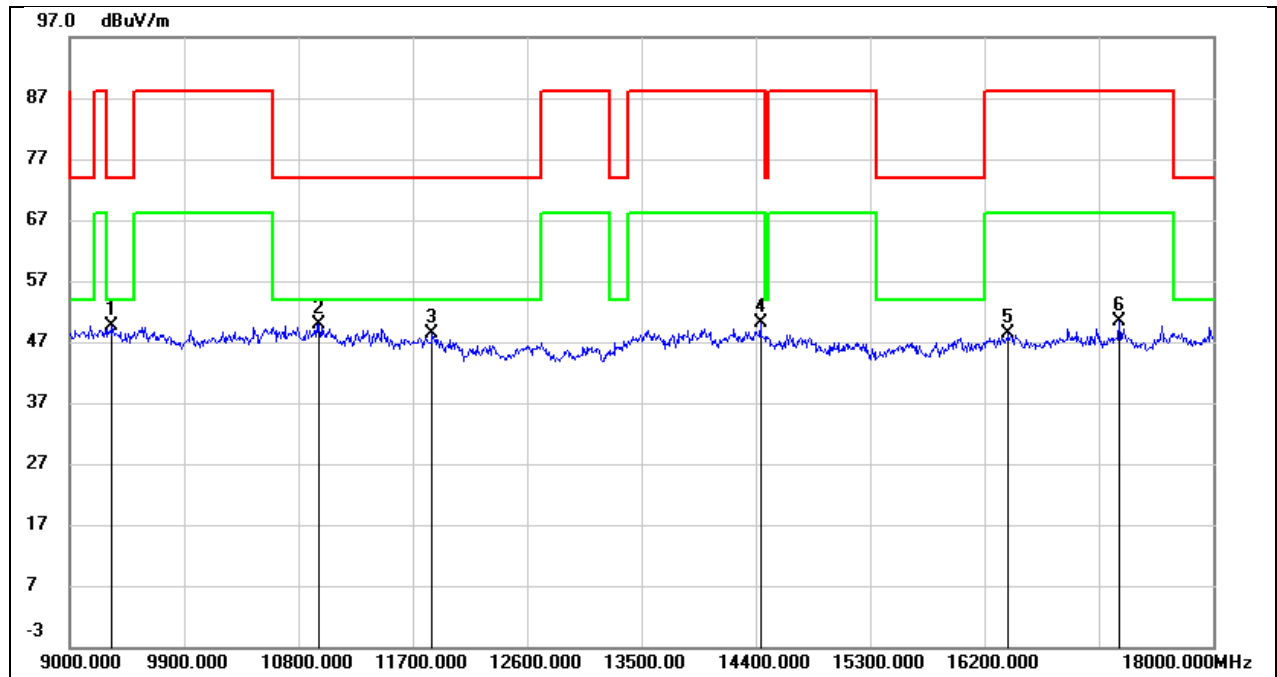


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9333.000        | 37.52          | 12.07          | 49.59           | 74.00          | -24.41      | peak   |
| 2   | 10962.000       | 35.15          | 14.61          | 49.76           | 74.00          | -24.24      | peak   |
| 3   | 11853.000       | 30.98          | 17.39          | 48.37           | 74.00          | -25.63      | peak   |
| 4   | 14436.000       | 29.04          | 21.08          | 50.12           | 88.20          | -38.08      | peak   |
| 5   | 16389.000       | 23.98          | 24.49          | 48.47           | 88.20          | -39.73      | peak   |
| 6   | 17262.000       | 25.48          | 24.82          | 50.30           | 88.20          | -37.90      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 7015      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

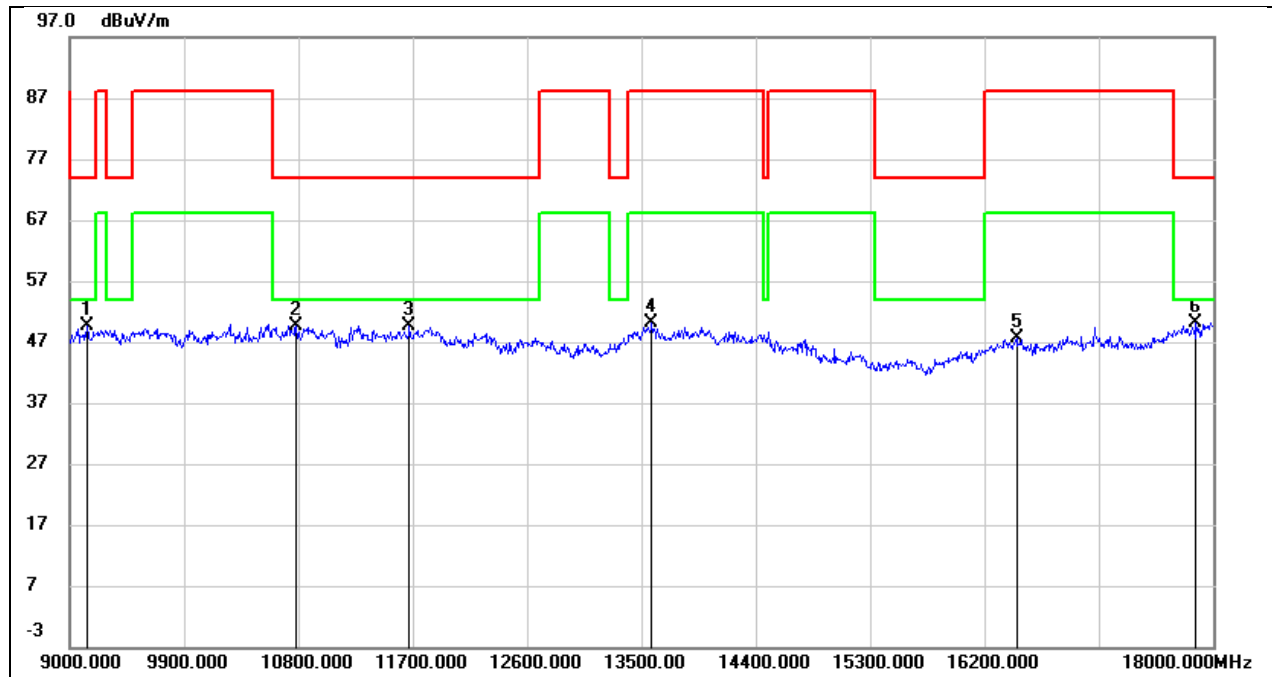


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9135.000        | 38.31          | 11.24          | 49.55           | 74.00          | -24.45      | peak   |
| 2   | 10782.000       | 34.74          | 14.94          | 49.68           | 74.00          | -24.32      | peak   |
| 3   | 11673.000       | 31.11          | 18.53          | 49.64           | 74.00          | -24.36      | peak   |
| 4   | 13581.000       | 27.81          | 22.38          | 50.19           | 88.20          | -38.01      | peak   |
| 5   | 16452.000       | 24.97          | 22.64          | 47.61           | 88.20          | -40.59      | peak   |
| 6   | 17865.000       | 22.28          | 27.91          | 50.19           | 74.00          | -23.81      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 7015      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

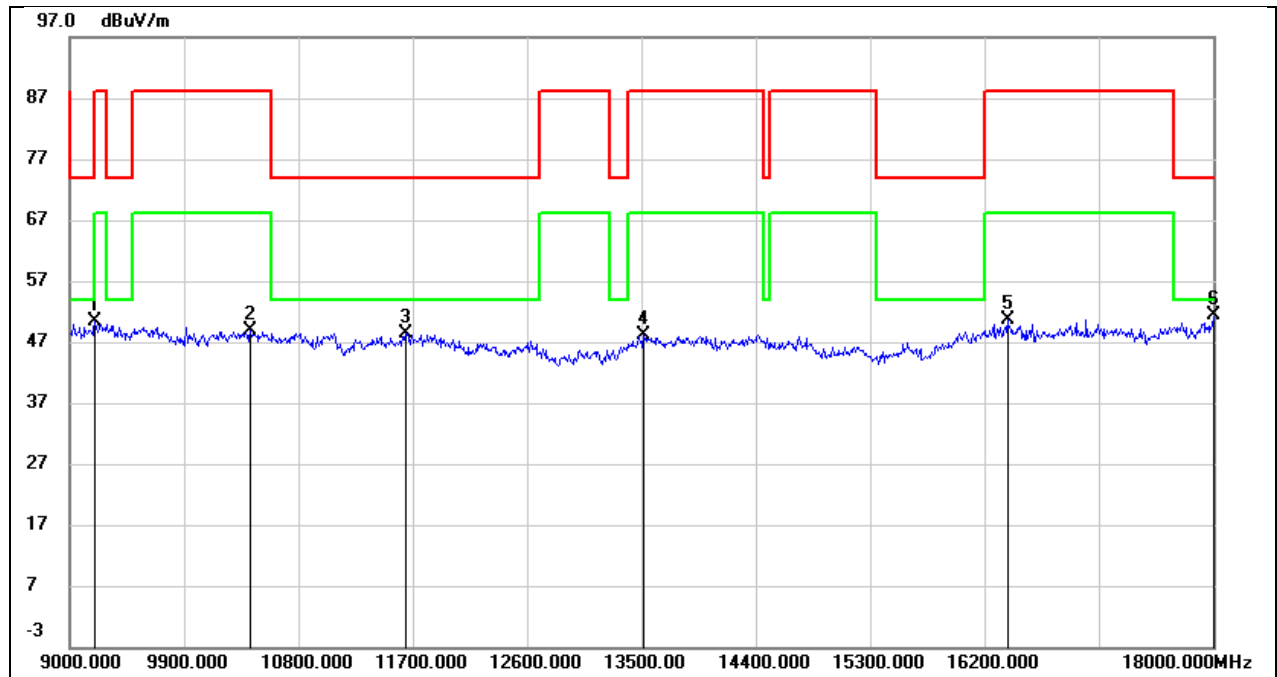


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9198.000        | 38.66          | 11.68          | 50.34           | 74.00          | -23.66      | peak   |
| 2   | 10422.000       | 35.11          | 13.66          | 48.77           | 88.20          | -39.43      | peak   |
| 3   | 11646.000       | 31.30          | 17.16          | 48.46           | 74.00          | -25.54      | peak   |
| 4   | 13518.000       | 27.51          | 20.57          | 48.08           | 88.20          | -40.12      | peak   |
| 5   | 16380.000       | 26.01          | 24.51          | 50.52           | 88.20          | -37.68      | peak   |
| 6   | 18000.000       | 24.40          | 27.00          | 51.40           | 74.00          | -22.60      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

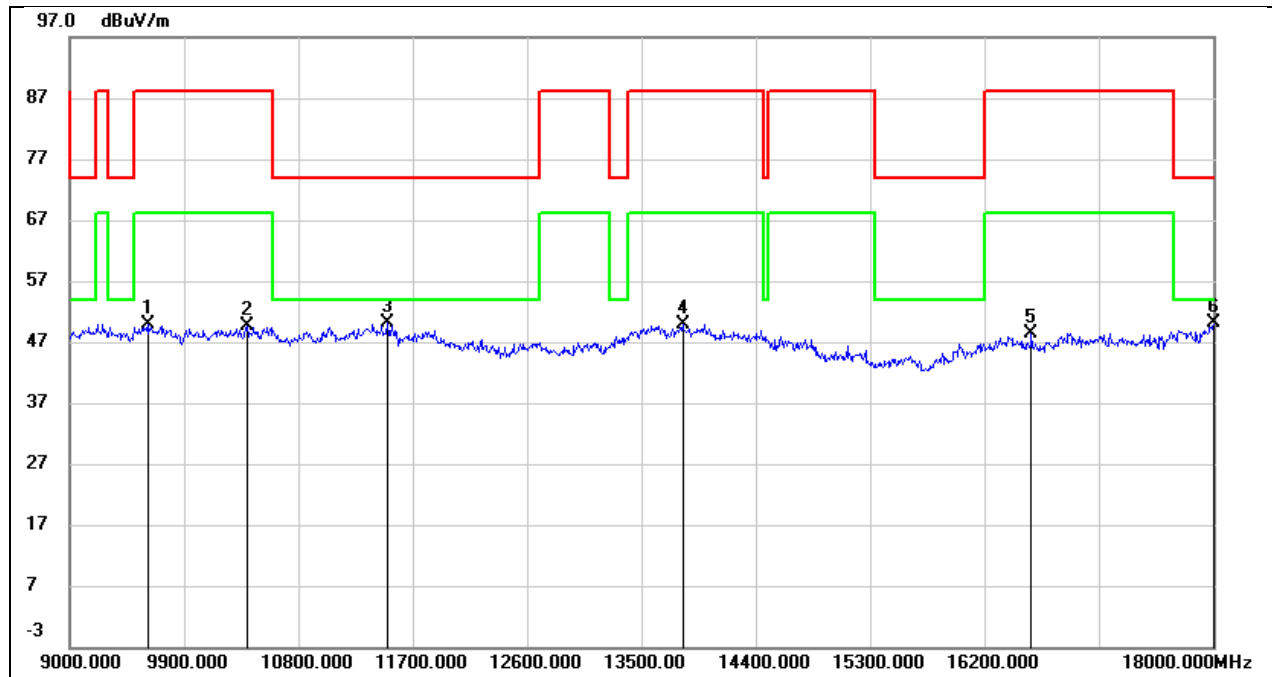


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9612.000        | 36.49          | 13.41          | 49.90           | 88.20          | -38.30      | peak   |
| 2   | 10395.000       | 35.65          | 13.88          | 49.53           | 88.20          | -38.67      | peak   |
| 3   | 11502.000       | 31.91          | 18.11          | 50.02           | 74.00          | -23.98      | peak   |
| 4   | 13824.000       | 27.10          | 22.80          | 49.90           | 88.20          | -38.30      | peak   |
| 5   | 16569.000       | 25.87          | 22.54          | 48.41           | 88.20          | -39.79      | peak   |
| 6   | 18000.000       | 21.01          | 29.20          | 50.21           | 74.00          | -23.79      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 7115      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

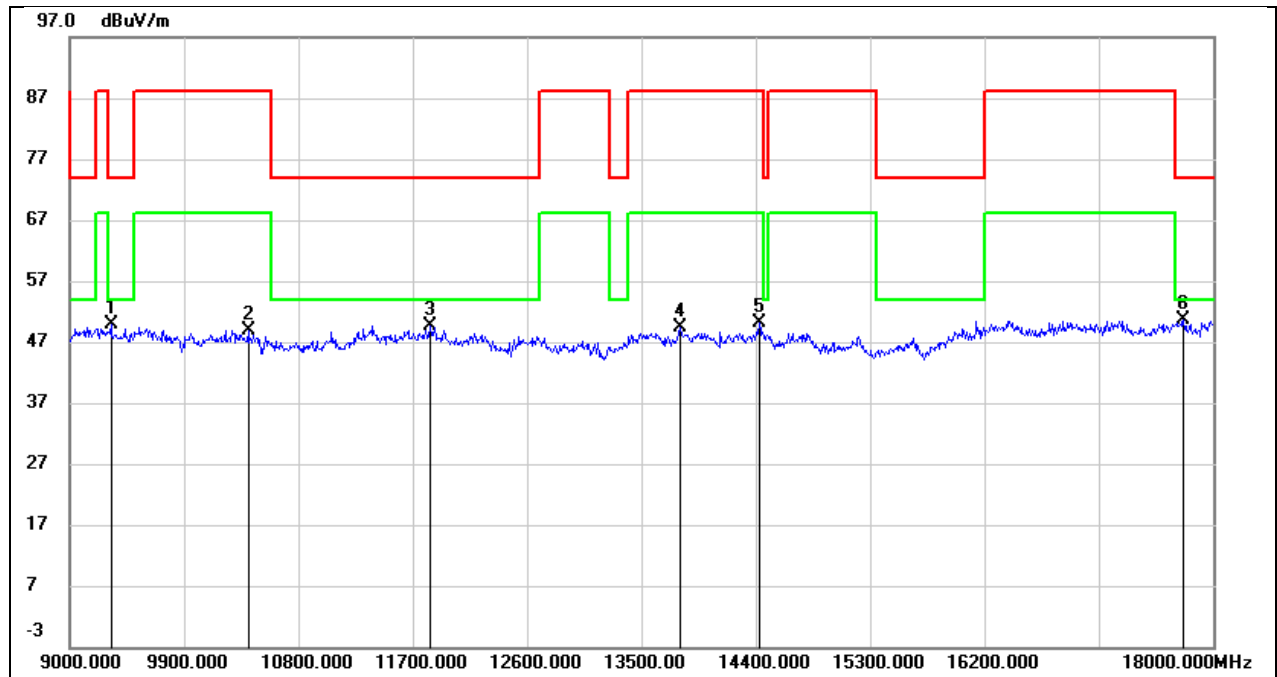


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9324.000        | 37.71          | 12.05          | 49.76           | 74.00          | -24.24      | peak   |
| 2   | 10404.000       | 35.36          | 13.60          | 48.96           | 88.20          | -39.24      | peak   |
| 3   | 11835.000       | 32.30          | 17.36          | 49.66           | 74.00          | -24.34      | peak   |
| 4   | 13806.000       | 28.15          | 21.11          | 49.26           | 88.20          | -38.94      | peak   |
| 5   | 14427.000       | 29.11          | 21.09          | 50.20           | 88.20          | -38.00      | peak   |
| 6   | 17766.000       | 24.84          | 25.85          | 50.69           | 74.00          | -23.31      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 5965      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

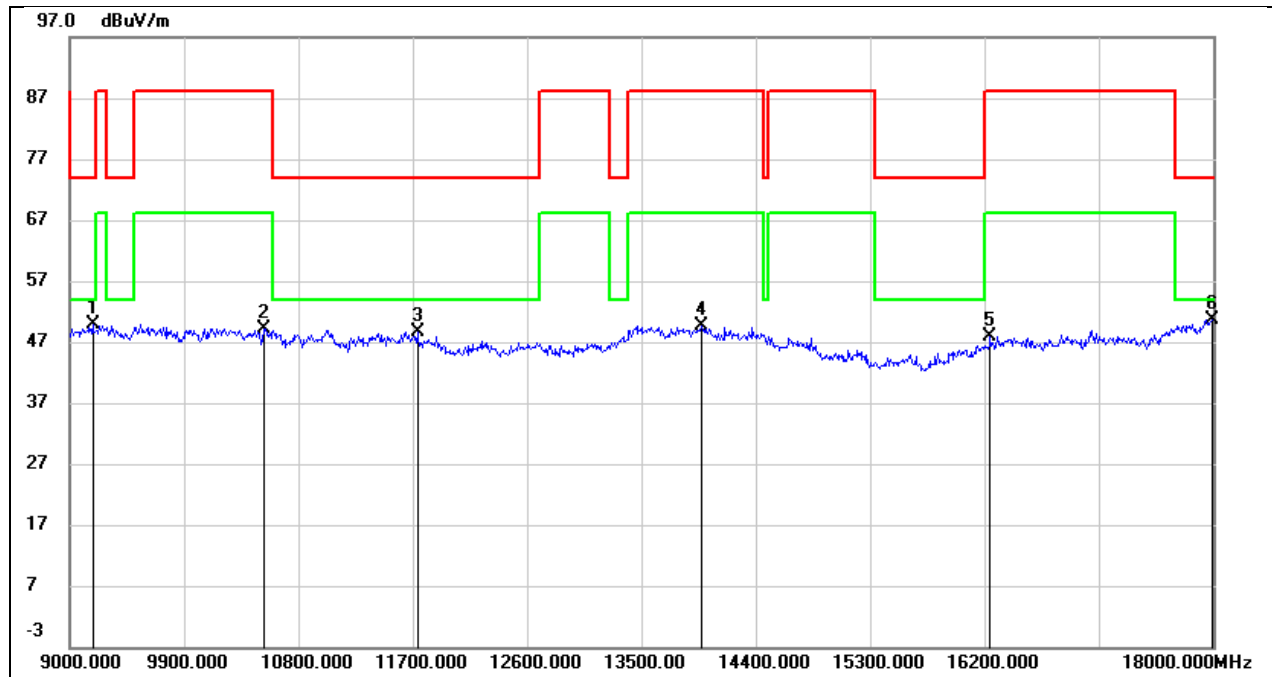


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9180.000        | 38.50          | 11.37          | 49.87           | 74.00          | -24.13      | peak   |
| 2   | 10530.000       | 34.84          | 14.24          | 49.08           | 88.20          | -39.12      | peak   |
| 3   | 11736.000       | 30.08          | 18.55          | 48.63           | 74.00          | -25.37      | peak   |
| 4   | 13968.000       | 26.41          | 23.16          | 49.57           | 88.20          | -38.63      | peak   |
| 5   | 16245.000       | 25.20          | 22.63          | 47.83           | 88.20          | -40.37      | peak   |
| 6   | 17991.000       | 21.56          | 29.11          | 50.67           | 74.00          | -23.33      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 5965      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

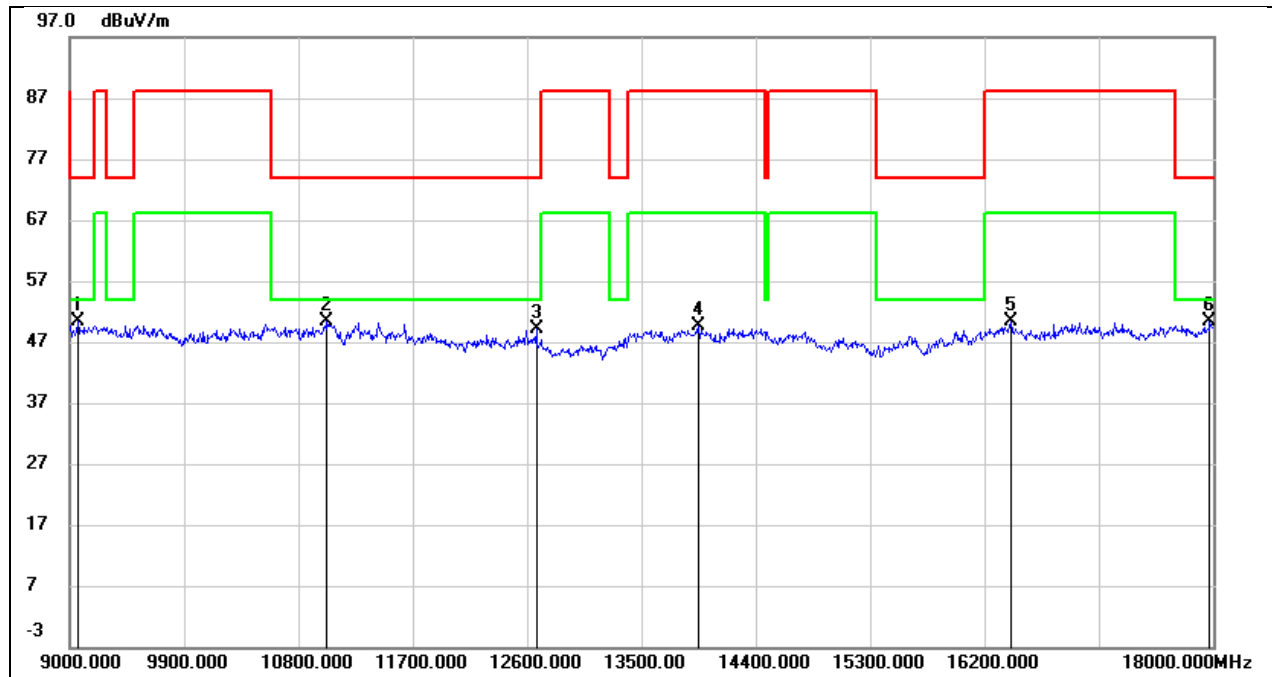


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9063.000        | 39.11          | 11.34          | 50.45           | 74.00          | -23.55      | peak   |
| 2   | 11025.000       | 35.56          | 14.74          | 50.30           | 74.00          | -23.70      | peak   |
| 3   | 12672.000       | 31.04          | 18.07          | 49.11           | 74.00          | -24.89      | peak   |
| 4   | 13950.000       | 28.04          | 21.50          | 49.54           | 88.20          | -38.66      | peak   |
| 5   | 16407.000       | 25.83          | 24.47          | 50.30           | 88.20          | -37.90      | peak   |
| 6   | 17973.000       | 23.61          | 26.86          | 50.47           | 74.00          | -23.53      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6165      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

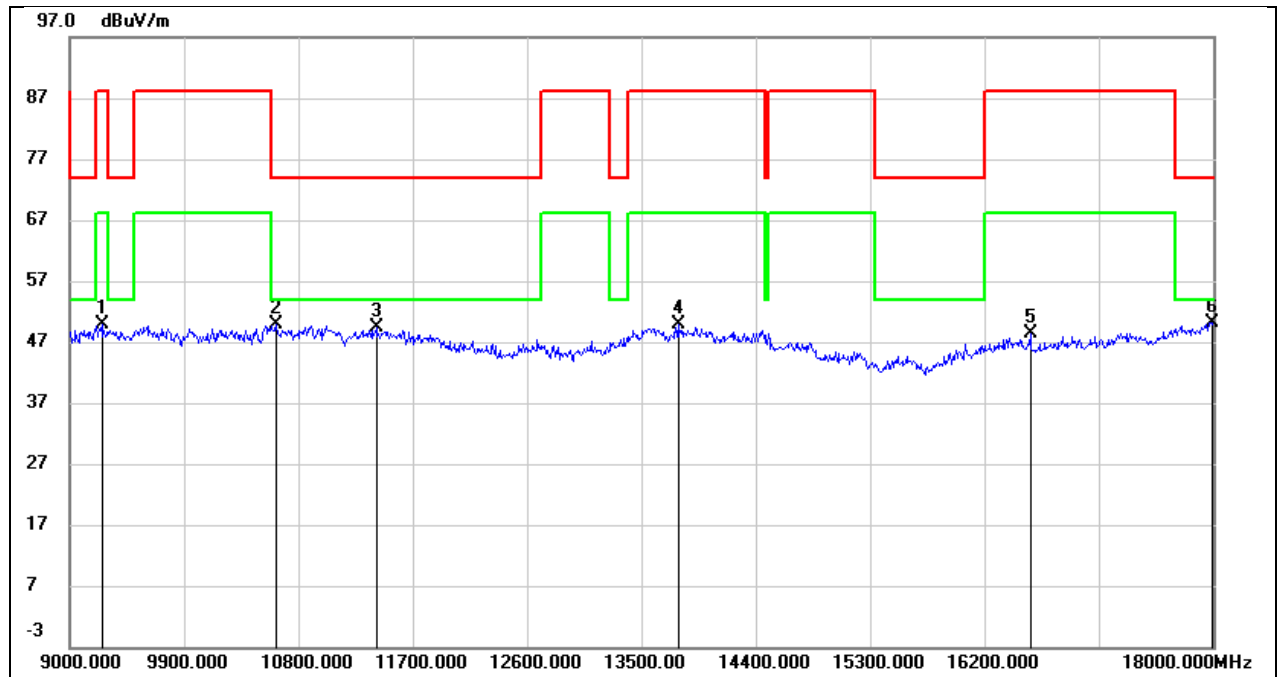


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9252.000        | 38.29          | 11.63          | 49.92           | 88.20          | -38.28      | peak   |
| 2   | 10620.000       | 35.23          | 14.55          | 49.78           | 74.00          | -24.22      | peak   |
| 3   | 11412.000       | 31.76          | 17.55          | 49.31           | 74.00          | -24.69      | peak   |
| 4   | 13788.000       | 27.13          | 22.72          | 49.85           | 88.20          | -38.35      | peak   |
| 5   | 16560.000       | 25.80          | 22.54          | 48.34           | 88.20          | -39.86      | peak   |
| 6   | 17991.000       | 21.14          | 29.11          | 50.25           | 74.00          | -23.75      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6165      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

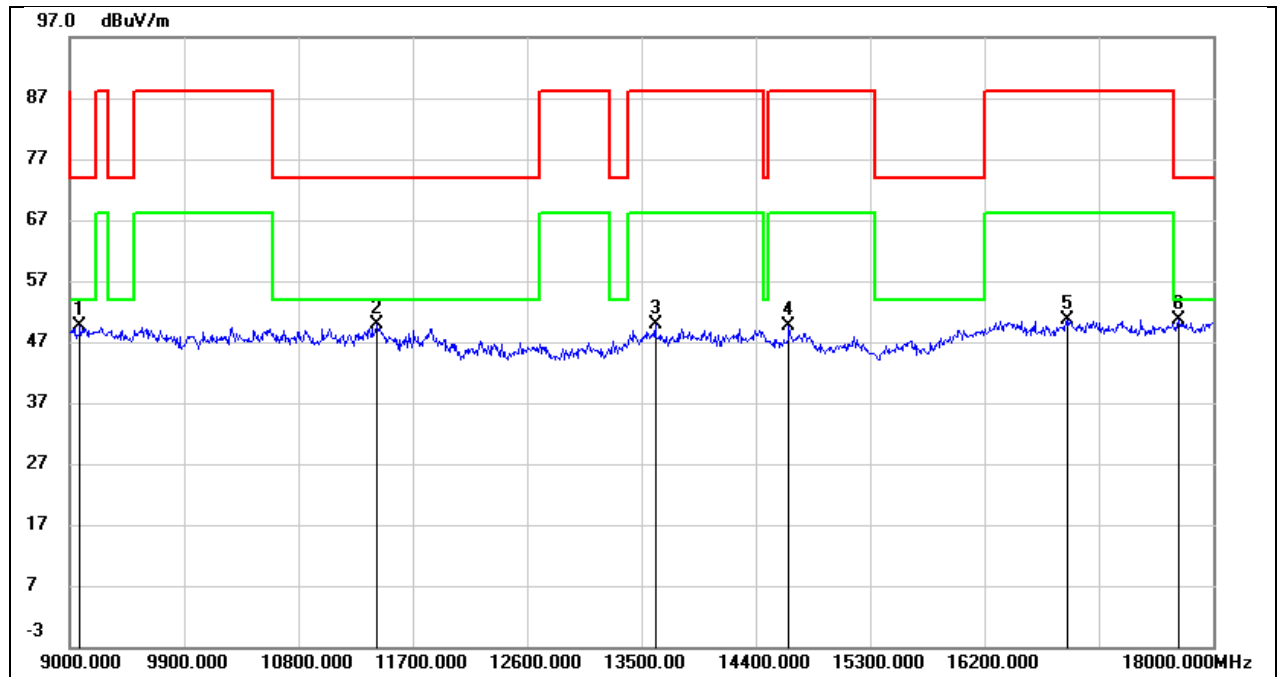


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9081.000        | 38.34          | 11.39          | 49.73           | 74.00          | -24.27      | peak   |
| 2   | 11421.000       | 33.70          | 16.22          | 49.92           | 74.00          | -24.08      | peak   |
| 3   | 13608.000       | 29.01          | 20.75          | 49.76           | 88.20          | -38.44      | peak   |
| 4   | 14661.000       | 29.12          | 20.60          | 49.72           | 88.20          | -38.48      | peak   |
| 5   | 16848.000       | 26.32          | 24.42          | 50.74           | 88.20          | -37.46      | peak   |
| 6   | 17730.000       | 24.95          | 25.71          | 50.66           | 74.00          | -23.34      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6405      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

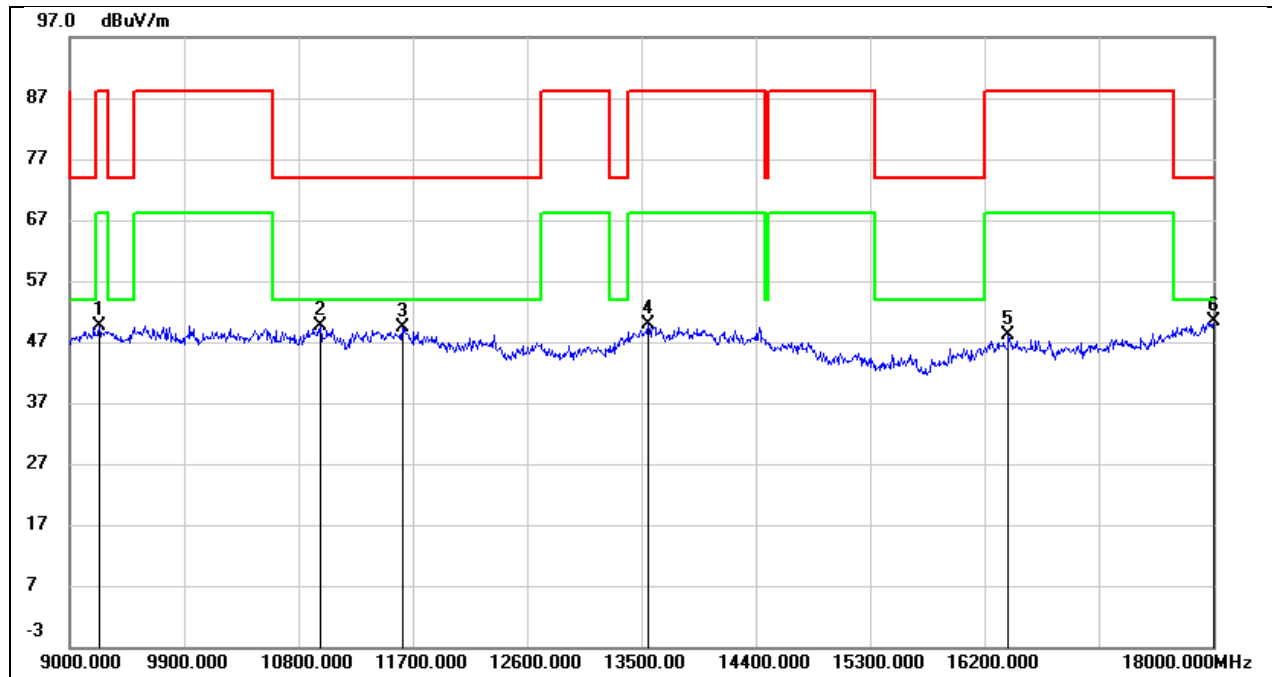


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9234.000        | 37.97          | 11.56          | 49.53           | 88.20          | -38.67      | peak   |
| 2   | 10971.000       | 34.21          | 15.39          | 49.60           | 74.00          | -24.40      | peak   |
| 3   | 11619.000       | 30.81          | 18.54          | 49.35           | 74.00          | -24.65      | peak   |
| 4   | 13554.000       | 27.44          | 22.33          | 49.77           | 88.20          | -38.43      | peak   |
| 5   | 16389.000       | 25.56          | 22.64          | 48.20           | 88.20          | -40.00      | peak   |
| 6   | 18000.000       | 21.15          | 29.20          | 50.35           | 74.00          | -23.65      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6405      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

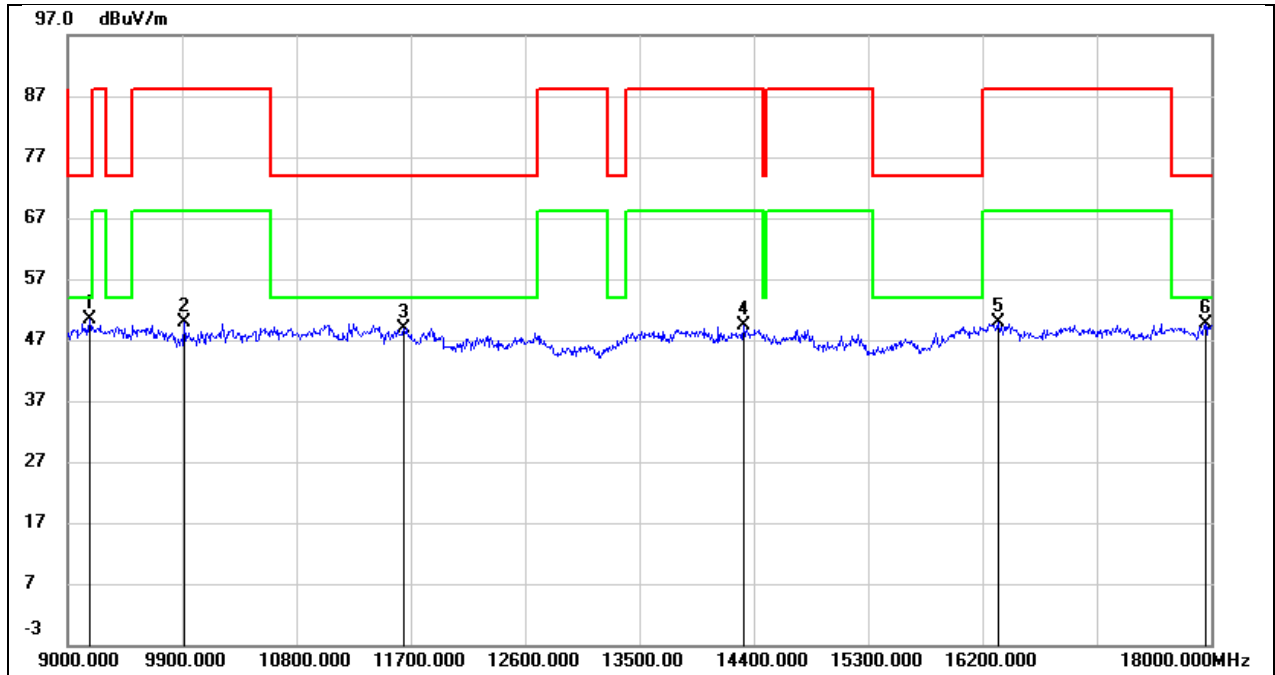


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9171.000        | 38.83          | 11.61          | 50.44           | 74.00          | -23.56      | peak   |
| 2   | 9918.000        | 36.63          | 13.22          | 49.85           | 88.20          | -38.35      | peak   |
| 3   | 11646.000       | 31.71          | 17.16          | 48.87           | 74.00          | -25.13      | peak   |
| 4   | 14319.000       | 28.21          | 21.27          | 49.48           | 88.20          | -38.72      | peak   |
| 5   | 16326.000       | 25.40          | 24.58          | 49.98           | 88.20          | -38.22      | peak   |
| 6   | 17955.000       | 22.96          | 26.77          | 49.73           | 74.00          | -24.27      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6445      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

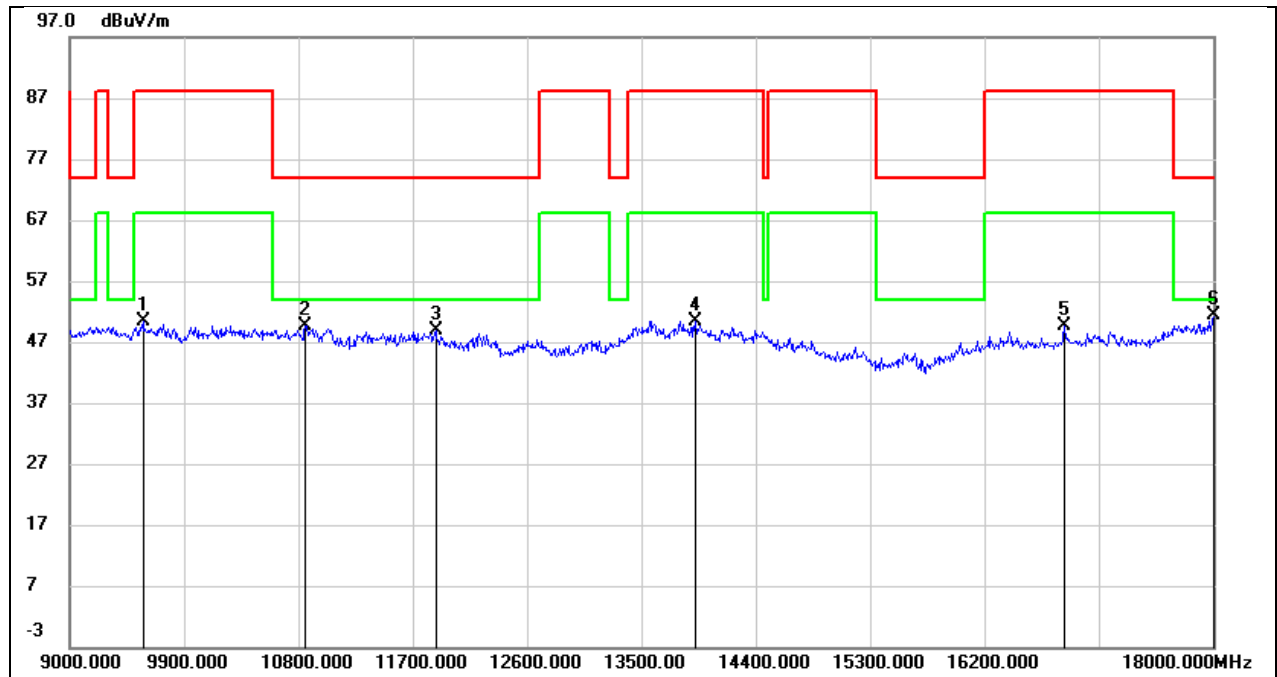


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9576.000        | 37.15          | 13.25          | 50.40           | 88.20          | -37.80      | peak   |
| 2   | 10854.000       | 34.49          | 15.11          | 49.60           | 74.00          | -24.40      | peak   |
| 3   | 11880.000       | 30.28          | 18.65          | 48.93           | 74.00          | -25.07      | peak   |
| 4   | 13923.000       | 27.44          | 23.05          | 50.49           | 88.20          | -37.71      | peak   |
| 5   | 16830.000       | 27.00          | 22.67          | 49.67           | 88.20          | -38.53      | peak   |
| 6   | 18000.000       | 22.23          | 29.20          | 51.43           | 74.00          | -22.57      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6445      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

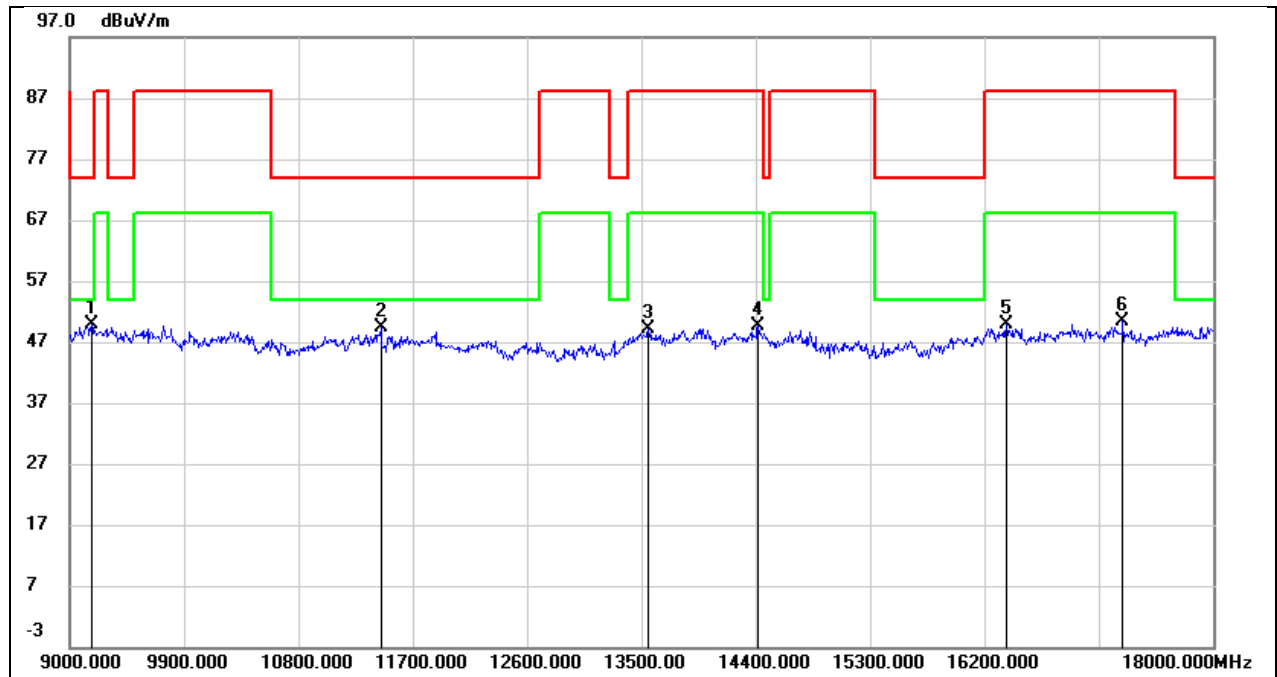


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9171.000        | 38.21          | 11.61          | 49.82           | 74.00          | -24.18      | peak   |
| 2   | 11448.000       | 33.08          | 16.35          | 49.43           | 74.00          | -24.57      | peak   |
| 3   | 13554.000       | 28.38          | 20.64          | 49.02           | 88.20          | -39.18      | peak   |
| 4   | 14418.000       | 28.41          | 21.11          | 49.52           | 88.20          | -38.68      | peak   |
| 5   | 16371.000       | 25.42          | 24.51          | 49.93           | 88.20          | -38.27      | peak   |
| 6   | 17289.000       | 25.50          | 24.82          | 50.32           | 88.20          | -37.88      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6485      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

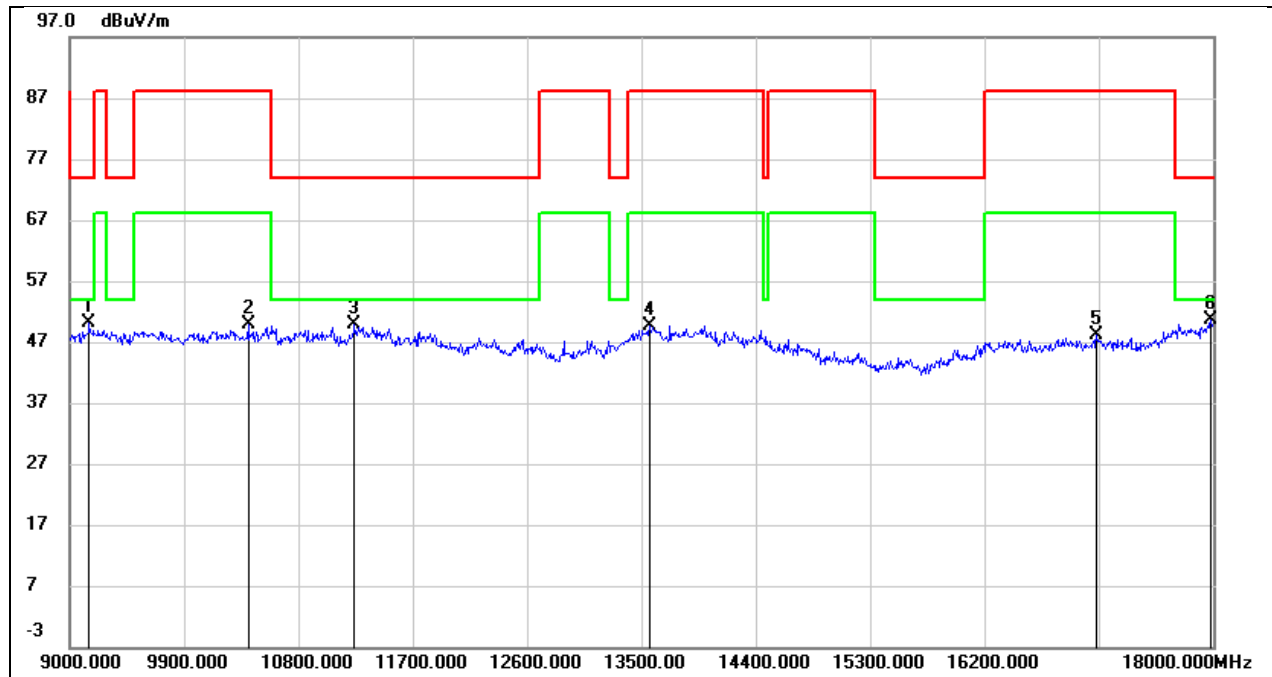


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9153.000        | 38.81          | 11.28          | 50.09           | 74.00          | -23.91      | peak   |
| 2   | 10404.000       | 35.87          | 13.89          | 49.76           | 88.20          | -38.44      | peak   |
| 3   | 11241.000       | 33.35          | 16.63          | 49.98           | 74.00          | -24.02      | peak   |
| 4   | 13563.000       | 27.21          | 22.36          | 49.57           | 88.20          | -38.63      | peak   |
| 5   | 17082.000       | 24.75          | 23.38          | 48.13           | 88.20          | -40.07      | peak   |
| 6   | 17982.000       | 21.49          | 29.03          | 50.52           | 74.00          | -23.48      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6485      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

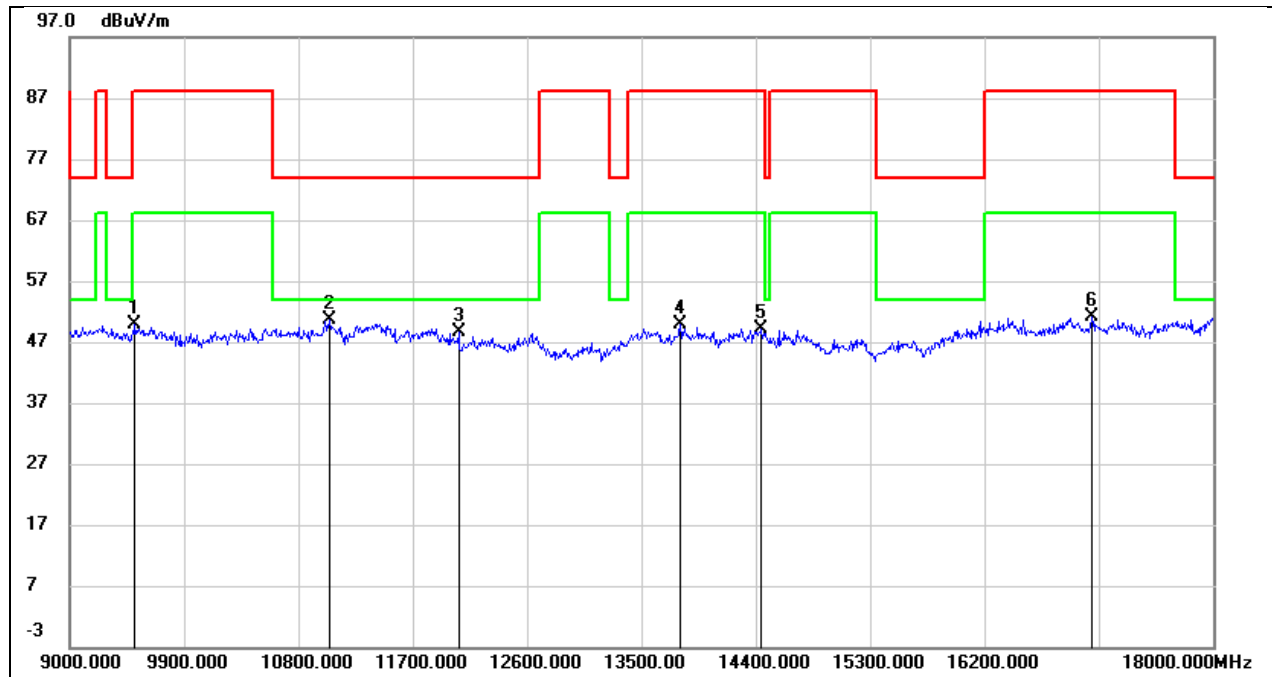


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9513.000        | 36.96          | 12.87          | 49.83           | 88.20          | -38.37      | peak   |
| 2   | 11043.000       | 35.74          | 14.79          | 50.53           | 74.00          | -23.47      | peak   |
| 3   | 12060.000       | 31.03          | 17.70          | 48.73           | 74.00          | -25.27      | peak   |
| 4   | 13806.000       | 28.68          | 21.11          | 49.79           | 88.20          | -38.41      | peak   |
| 5   | 14445.000       | 28.18          | 21.05          | 49.23           | 88.20          | -38.97      | peak   |
| 6   | 17046.000       | 26.23          | 24.80          | 51.03           | 88.20          | -37.17      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6525      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

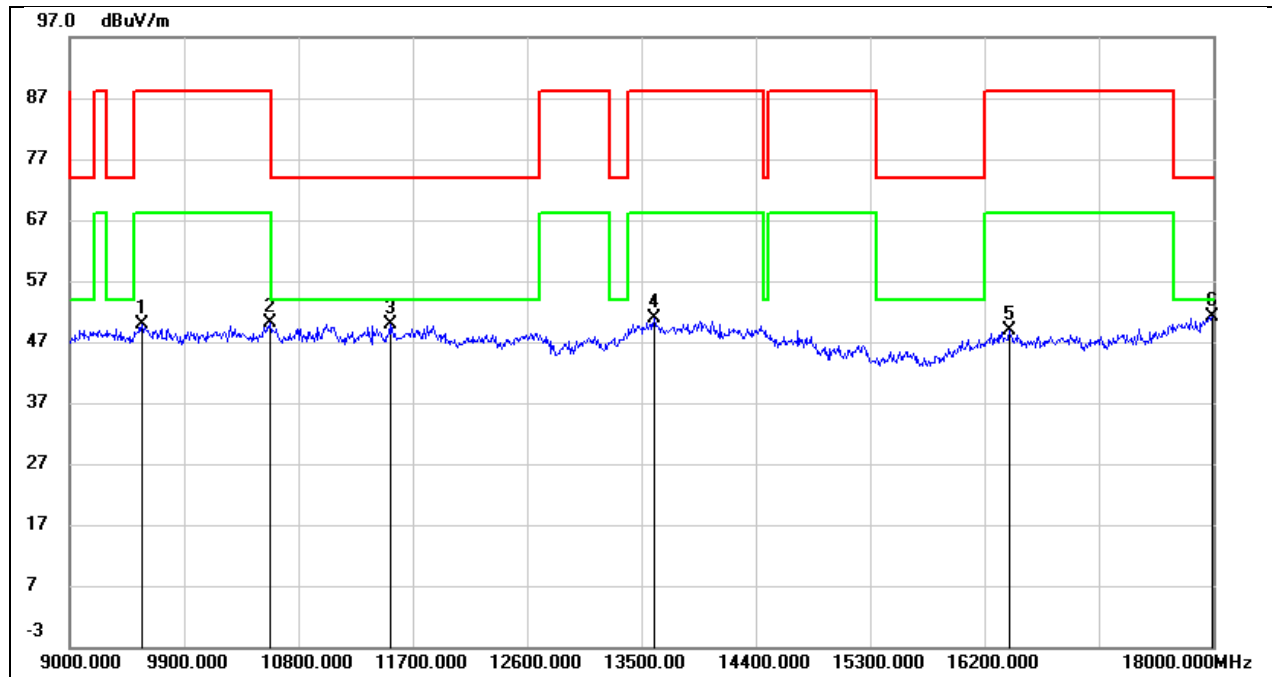


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9567.000        | 36.71          | 13.20          | 49.91           | 88.20          | -38.29      | peak   |
| 2   | 10575.000       | 35.70          | 14.40          | 50.10           | 88.20          | -38.10      | peak   |
| 3   | 11520.000       | 31.64          | 18.19          | 49.83           | 74.00          | -24.17      | peak   |
| 4   | 13599.000       | 28.44          | 22.42          | 50.86           | 88.20          | -37.34      | peak   |
| 5   | 16398.000       | 26.24          | 22.64          | 48.88           | 88.20          | -39.32      | peak   |
| 6   | 17991.000       | 22.00          | 29.11          | 51.11           | 74.00          | -22.89      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6525      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

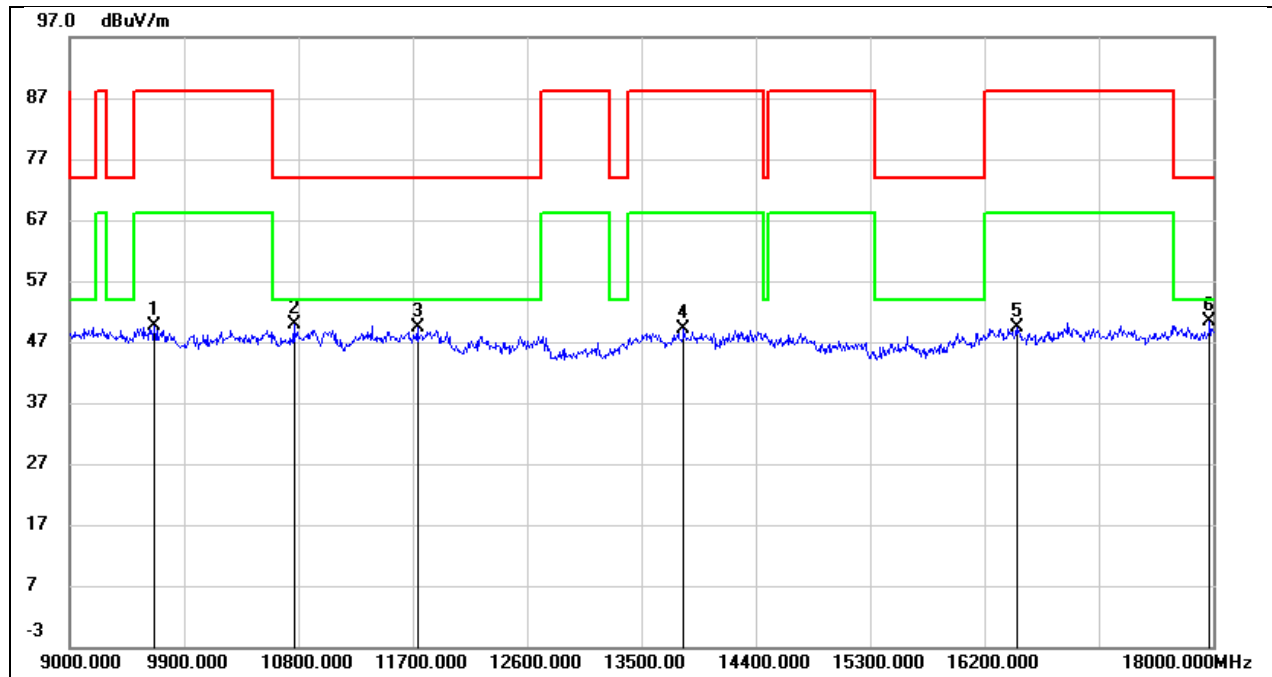


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9666.000        | 36.41          | 13.32          | 49.73           | 88.20          | -38.47      | peak   |
| 2   | 10764.000       | 35.38          | 14.38          | 49.76           | 74.00          | -24.24      | peak   |
| 3   | 11736.000       | 32.07          | 17.24          | 49.31           | 74.00          | -24.69      | peak   |
| 4   | 13833.000       | 27.86          | 21.19          | 49.05           | 88.20          | -39.15      | peak   |
| 5   | 16452.000       | 24.99          | 24.41          | 49.40           | 88.20          | -38.80      | peak   |
| 6   | 17973.000       | 23.49          | 26.86          | 50.35           | 74.00          | -23.65      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6565      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

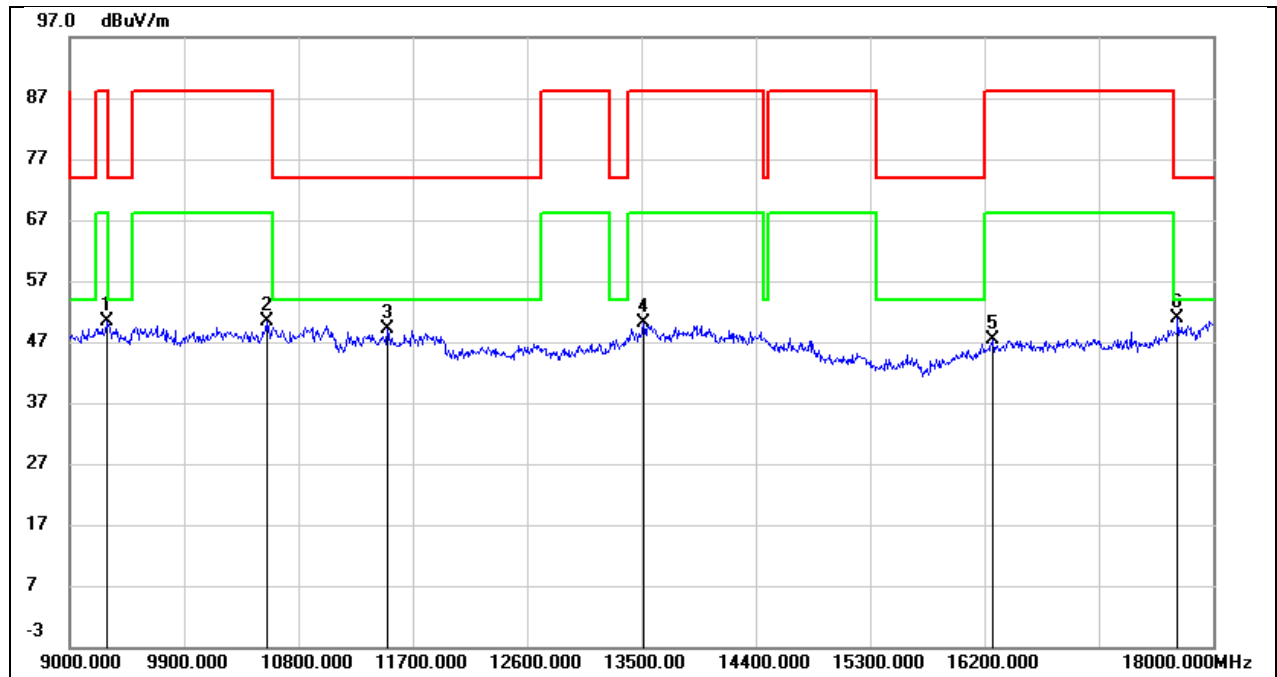


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9288.000        | 38.66          | 11.76          | 50.42           | 88.20          | -37.78      | peak   |
| 2   | 10548.000       | 36.11          | 14.31          | 50.42           | 88.20          | -37.78      | peak   |
| 3   | 11502.000       | 30.98          | 18.11          | 49.09           | 74.00          | -24.91      | peak   |
| 4   | 13518.000       | 27.86          | 22.27          | 50.13           | 88.20          | -38.07      | peak   |
| 5   | 16263.000       | 24.82          | 22.62          | 47.44           | 88.20          | -40.76      | peak   |
| 6   | 17721.000       | 24.15          | 26.64          | 50.79           | 74.00          | -23.21      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6565      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

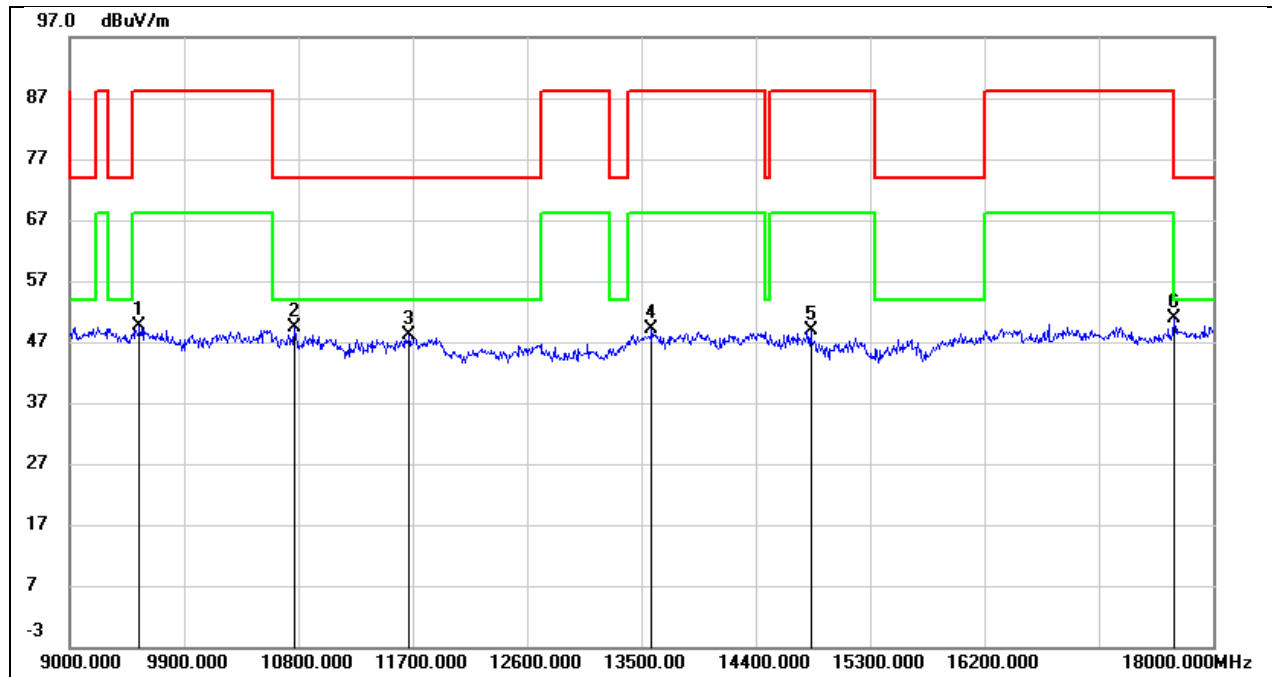


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9549.000        | 36.59          | 13.02          | 49.61           | 88.20          | -38.59      | peak   |
| 2   | 10764.000       | 34.90          | 14.38          | 49.28           | 74.00          | -24.72      | peak   |
| 3   | 11673.000       | 30.88          | 17.17          | 48.05           | 74.00          | -25.95      | peak   |
| 4   | 13581.000       | 28.31          | 20.70          | 49.01           | 88.20          | -39.19      | peak   |
| 5   | 14832.000       | 28.66          | 20.20          | 48.86           | 88.20          | -39.34      | peak   |
| 6   | 17694.000       | 25.41          | 25.56          | 50.97           | 88.20          | -37.23      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6725      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

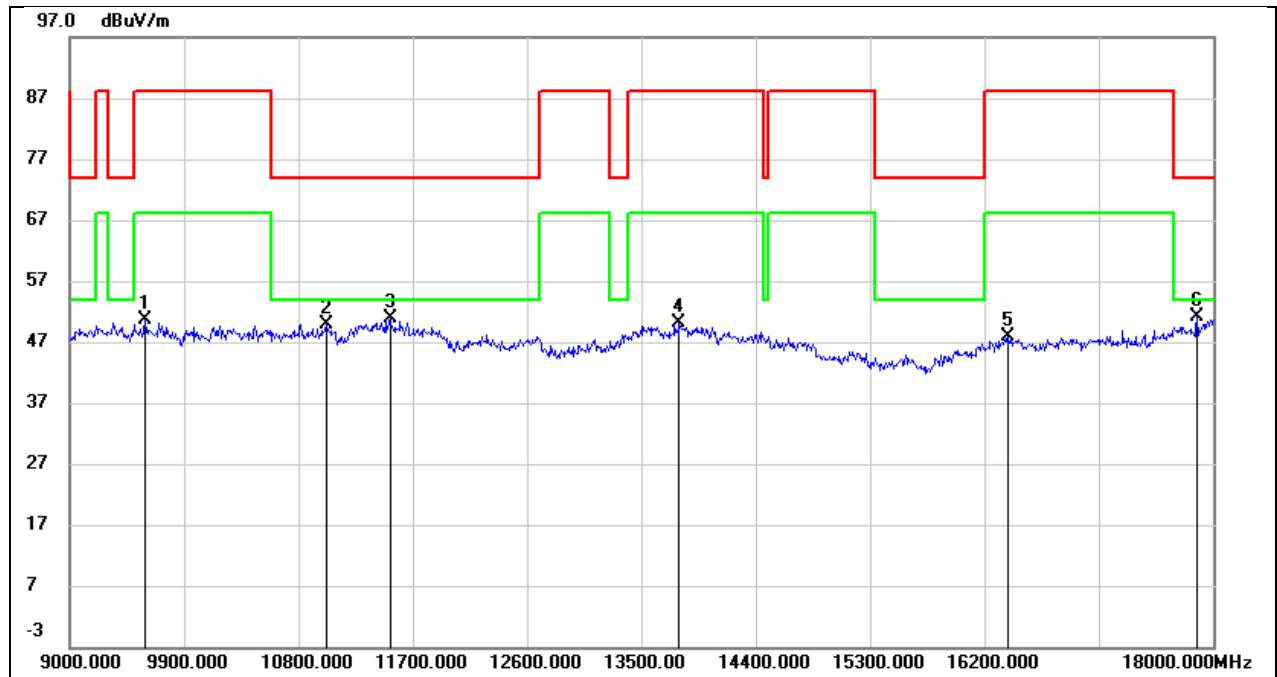


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9594.000        | 37.21          | 13.34          | 50.55           | 88.20          | -37.65      | peak   |
| 2   | 11016.000       | 34.44          | 15.54          | 49.98           | 74.00          | -24.02      | peak   |
| 3   | 11520.000       | 32.75          | 18.19          | 50.94           | 74.00          | -23.06      | peak   |
| 4   | 13797.000       | 27.39          | 22.73          | 50.12           | 88.20          | -38.08      | peak   |
| 5   | 16389.000       | 25.12          | 22.64          | 47.76           | 88.20          | -40.44      | peak   |
| 6   | 17874.000       | 23.14          | 28.00          | 51.14           | 74.00          | -22.86      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6725      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

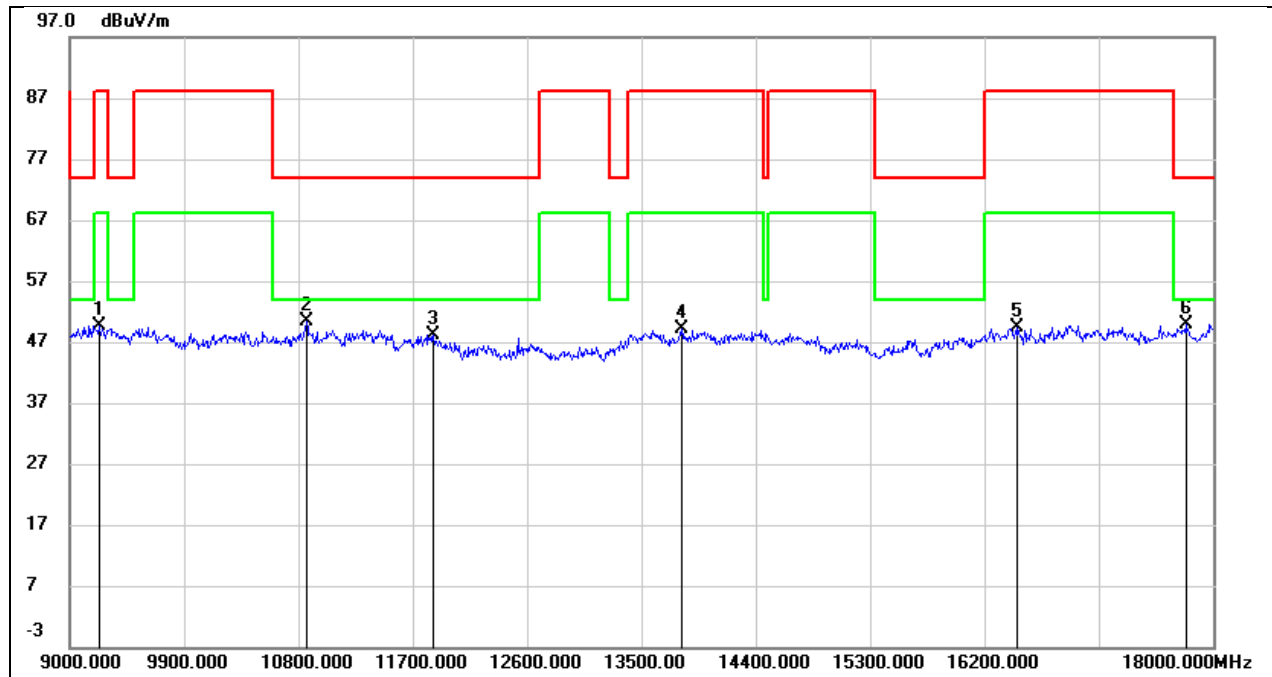


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9234.000        | 37.85          | 11.78          | 49.63           | 88.20          | -38.57      | peak   |
| 2   | 10863.000       | 35.81          | 14.49          | 50.30           | 74.00          | -23.70      | peak   |
| 3   | 11862.000       | 30.72          | 17.41          | 48.13           | 74.00          | -25.87      | peak   |
| 4   | 13815.000       | 27.96          | 21.14          | 49.10           | 88.20          | -39.10      | peak   |
| 5   | 16452.000       | 24.87          | 24.41          | 49.28           | 88.20          | -38.92      | peak   |
| 6   | 17784.000       | 24.09          | 25.91          | 50.00           | 74.00          | -24.00      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6845      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

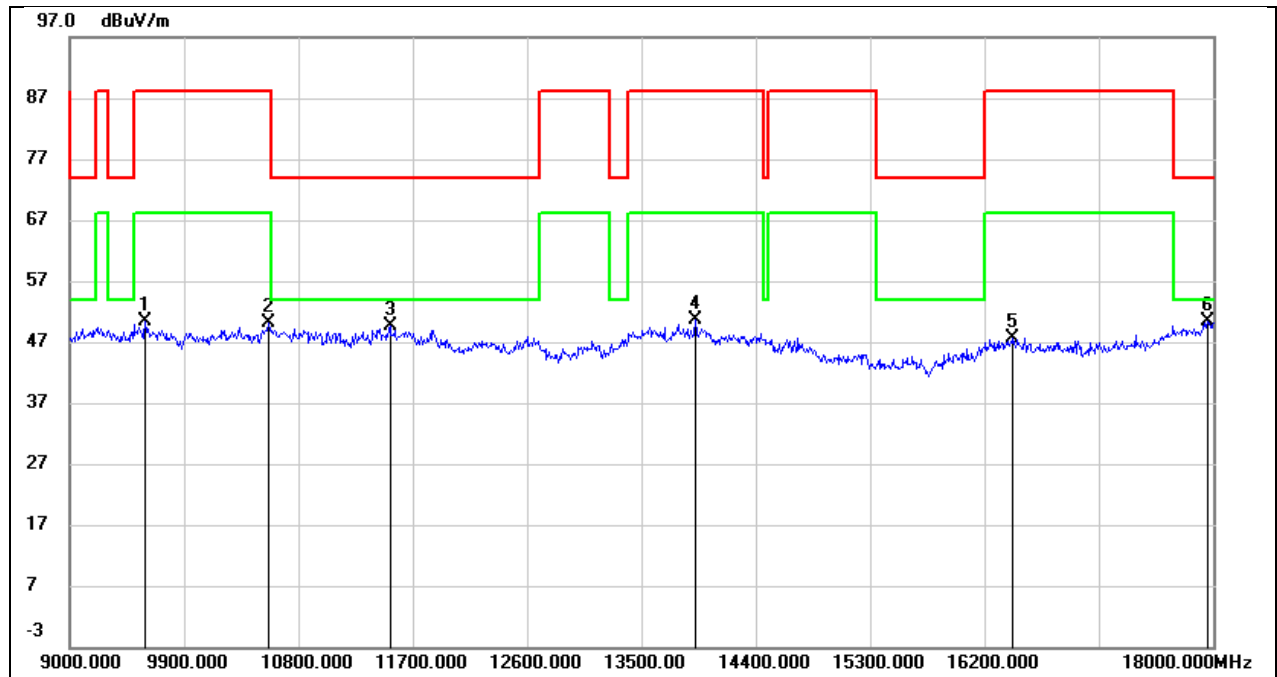


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9594.000        | 36.92          | 13.34          | 50.26           | 88.20          | -37.94      | peak   |
| 2   | 10566.000       | 35.71          | 14.37          | 50.08           | 88.20          | -38.12      | peak   |
| 3   | 11520.000       | 31.36          | 18.19          | 49.55           | 74.00          | -24.45      | peak   |
| 4   | 13923.000       | 27.60          | 23.05          | 50.65           | 88.20          | -37.55      | peak   |
| 5   | 16425.000       | 24.92          | 22.64          | 47.56           | 88.20          | -40.64      | peak   |
| 6   | 17955.000       | 21.60          | 28.77          | 50.37           | 74.00          | -23.63      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6845      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

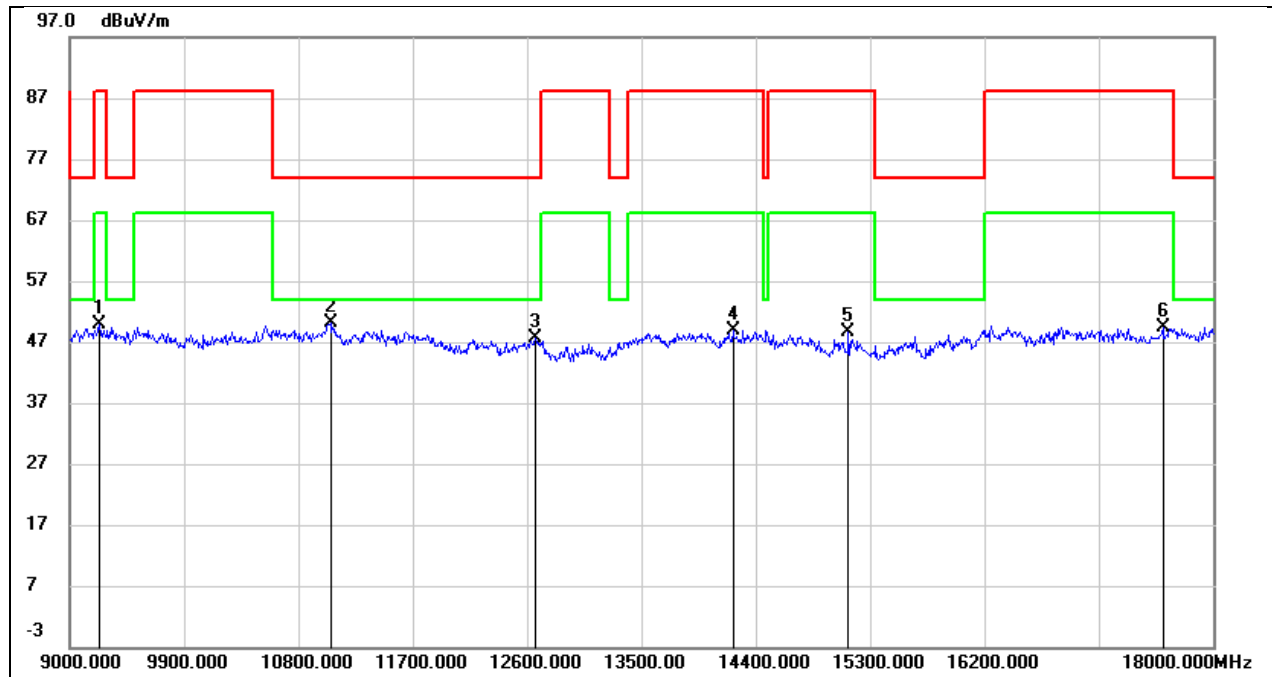


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9234.000        | 38.05          | 11.78          | 49.83           | 88.20          | -38.37      | peak   |
| 2   | 11052.000       | 35.43          | 14.82          | 50.25           | 74.00          | -23.75      | peak   |
| 3   | 12663.000       | 29.54          | 18.05          | 47.59           | 74.00          | -26.41      | peak   |
| 4   | 14220.000       | 27.55          | 21.43          | 48.98           | 88.20          | -39.22      | peak   |
| 5   | 15129.000       | 28.73          | 19.87          | 48.60           | 88.20          | -39.60      | peak   |
| 6   | 17604.000       | 24.09          | 25.21          | 49.30           | 88.20          | -38.90      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6885      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

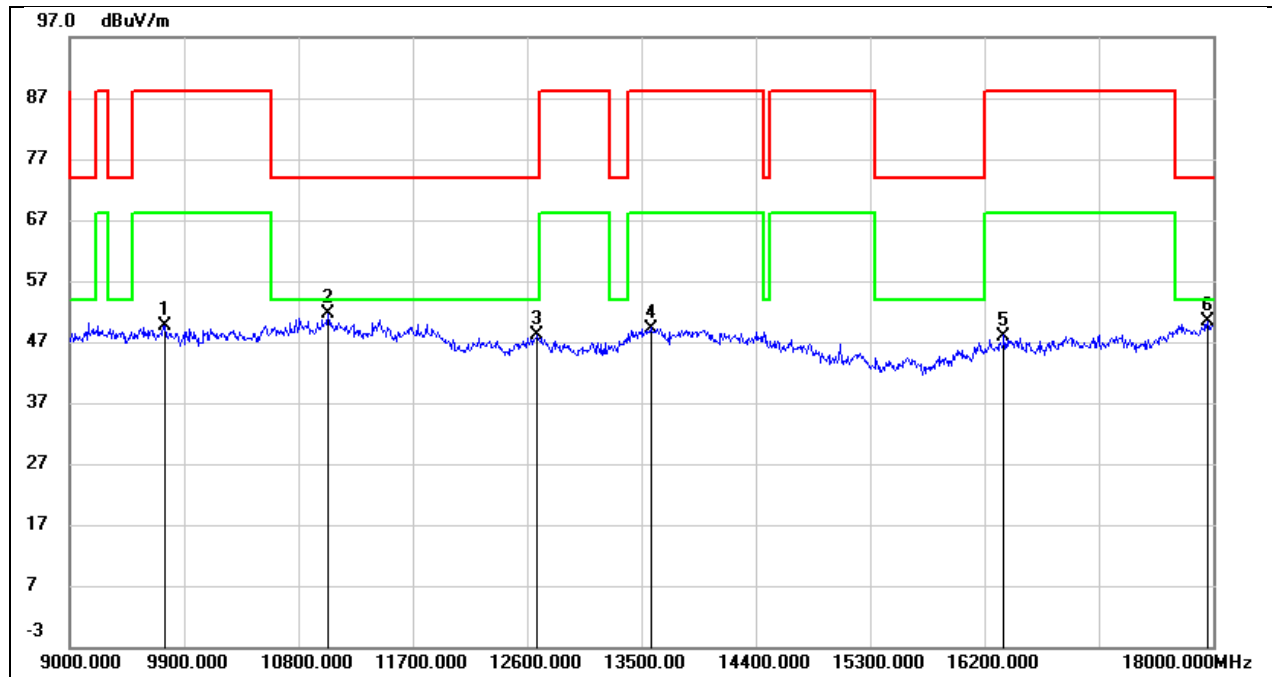


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9747.000        | 35.93          | 13.76          | 49.69           | 88.20          | -38.51      | peak   |
| 2   | 11034.000       | 35.96          | 15.60          | 51.56           | 74.00          | -22.44      | peak   |
| 3   | 12681.000       | 29.14          | 19.10          | 48.24           | 74.00          | -25.76      | peak   |
| 4   | 13572.000       | 26.88          | 22.37          | 49.25           | 88.20          | -38.95      | peak   |
| 5   | 16353.000       | 25.37          | 22.63          | 48.00           | 88.20          | -40.20      | peak   |
| 6   | 17955.000       | 21.66          | 28.77          | 50.43           | 74.00          | -23.57      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 6885      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

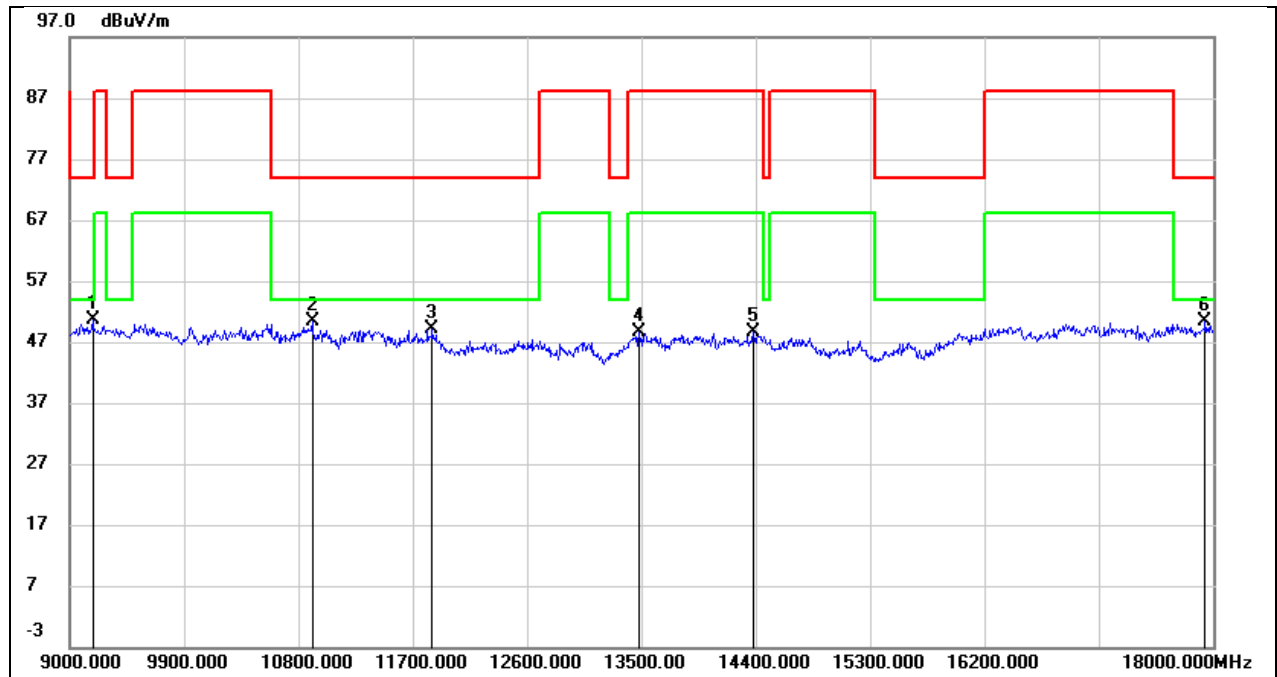


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9180.000        | 38.97          | 11.62          | 50.59           | 74.00          | -23.41      | peak   |
| 2   | 10908.000       | 35.72          | 14.54          | 50.26           | 74.00          | -23.74      | peak   |
| 3   | 11853.000       | 31.75          | 17.39          | 49.14           | 74.00          | -24.86      | peak   |
| 4   | 13482.000       | 28.14          | 20.48          | 48.62           | 88.20          | -39.58      | peak   |
| 5   | 14382.000       | 27.39          | 21.16          | 48.55           | 88.20          | -39.65      | peak   |
| 6   | 17937.000       | 23.68          | 26.68          | 50.36           | 74.00          | -23.64      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 7005      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

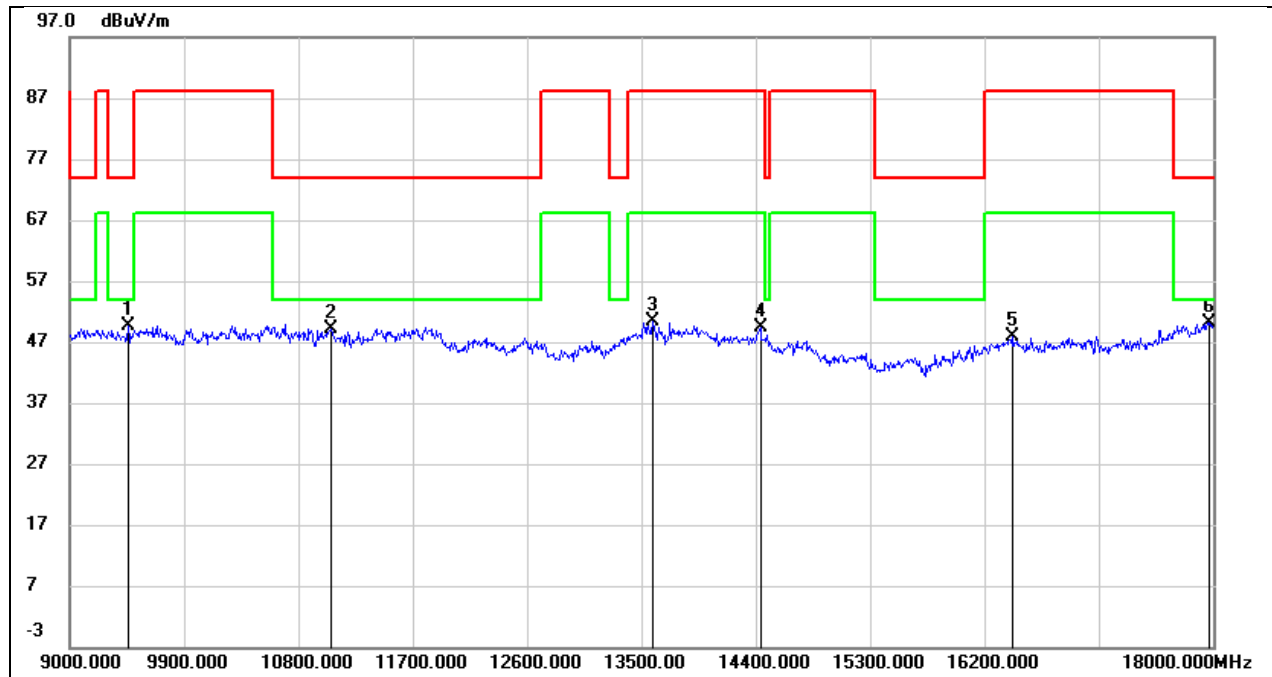


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9459.000        | 37.13          | 12.56          | 49.69           | 74.00          | -24.31      | peak   |
| 2   | 11052.000       | 33.52          | 15.69          | 49.21           | 74.00          | -24.79      | peak   |
| 3   | 13590.000       | 27.96          | 22.40          | 50.36           | 88.20          | -37.84      | peak   |
| 4   | 14436.000       | 27.78          | 21.54          | 49.32           | 88.20          | -38.88      | peak   |
| 5   | 16425.000       | 25.26          | 22.64          | 47.90           | 88.20          | -40.30      | peak   |
| 6   | 17964.000       | 21.38          | 28.86          | 50.24           | 74.00          | -23.76      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 7005      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

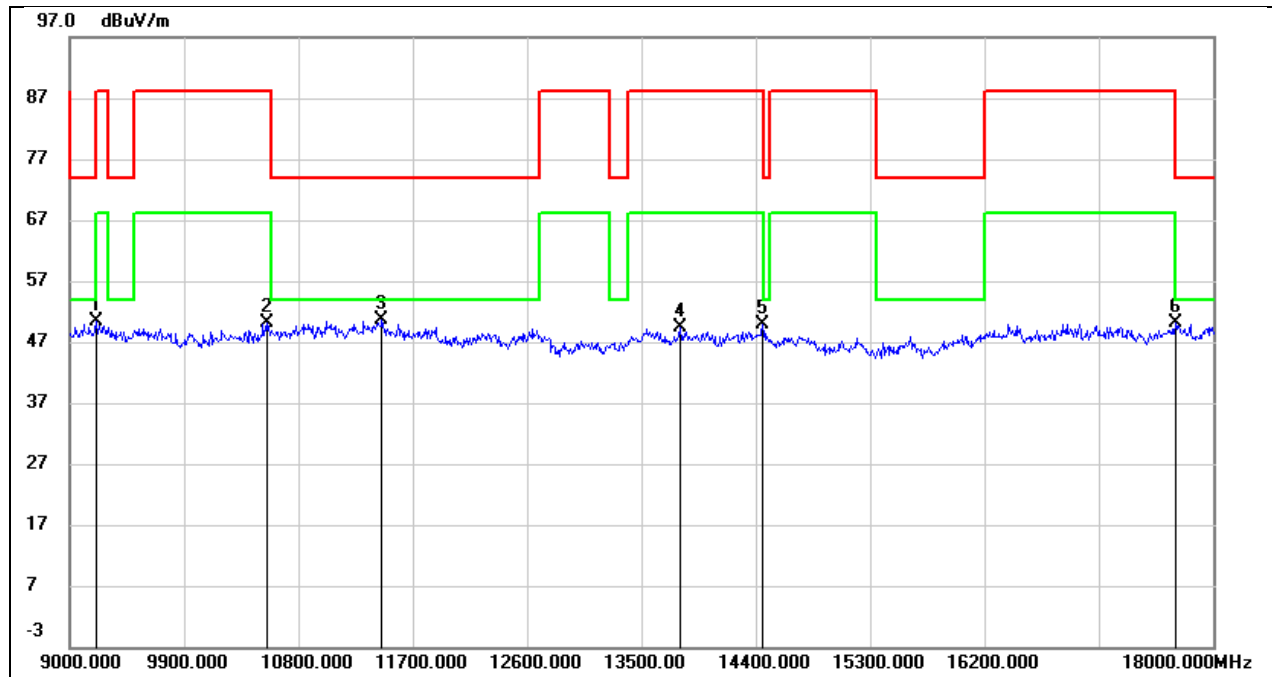


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9207.000        | 38.63          | 11.71          | 50.34           | 88.20          | -37.86      | peak   |
| 2   | 10548.000       | 36.14          | 14.05          | 50.19           | 88.20          | -38.01      | peak   |
| 3   | 11457.000       | 34.12          | 16.40          | 50.52           | 74.00          | -23.48      | peak   |
| 4   | 13806.000       | 28.16          | 21.11          | 49.27           | 88.20          | -38.93      | peak   |
| 5   | 14454.000       | 28.72          | 21.05          | 49.77           | 88.20          | -38.43      | peak   |
| 6   | 17703.000       | 24.55          | 25.60          | 50.15           | 74.00          | -23.85      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 7085      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

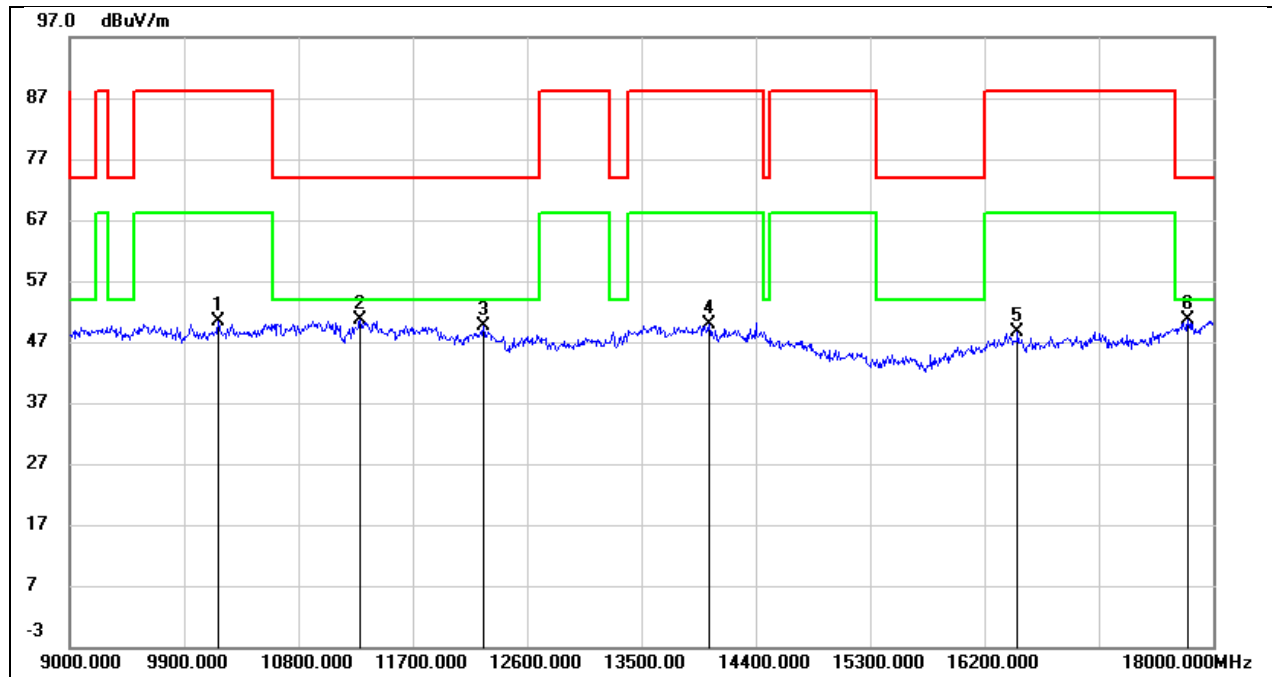


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 10170.000       | 36.73          | 13.66          | 50.39           | 88.20          | -37.81      | peak   |
| 2   | 11286.000       | 33.69          | 16.87          | 50.56           | 74.00          | -23.44      | peak   |
| 3   | 12258.000       | 30.82          | 18.77          | 49.59           | 74.00          | -24.41      | peak   |
| 4   | 14031.000       | 26.76          | 23.13          | 49.89           | 88.20          | -38.31      | peak   |
| 5   | 16461.000       | 26.04          | 22.63          | 48.67           | 88.20          | -39.53      | peak   |
| 6   | 17802.000       | 23.27          | 27.32          | 50.59           | 74.00          | -23.41      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE40 | Frequency(MHz): | 7085      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

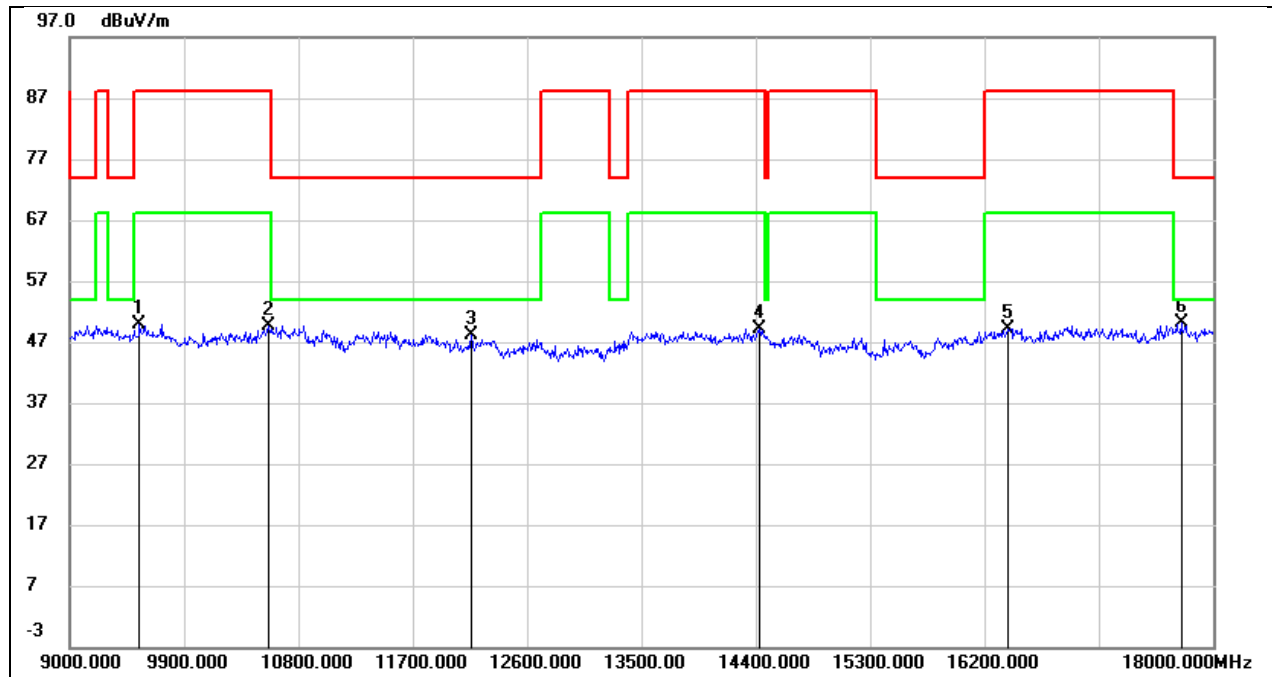


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9549.000        | 36.96          | 13.02          | 49.98           | 88.20          | -38.22      | peak   |
| 2   | 10566.000       | 35.53          | 14.09          | 49.62           | 88.20          | -38.58      | peak   |
| 3   | 12159.000       | 30.50          | 17.70          | 48.20           | 74.00          | -25.80      | peak   |
| 4   | 14427.000       | 28.03          | 21.09          | 49.12           | 88.20          | -39.08      | peak   |
| 5   | 16389.000       | 24.72          | 24.49          | 49.21           | 88.20          | -38.99      | peak   |
| 6   | 17748.000       | 24.47          | 25.78          | 50.25           | 74.00          | -23.75      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 5985      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

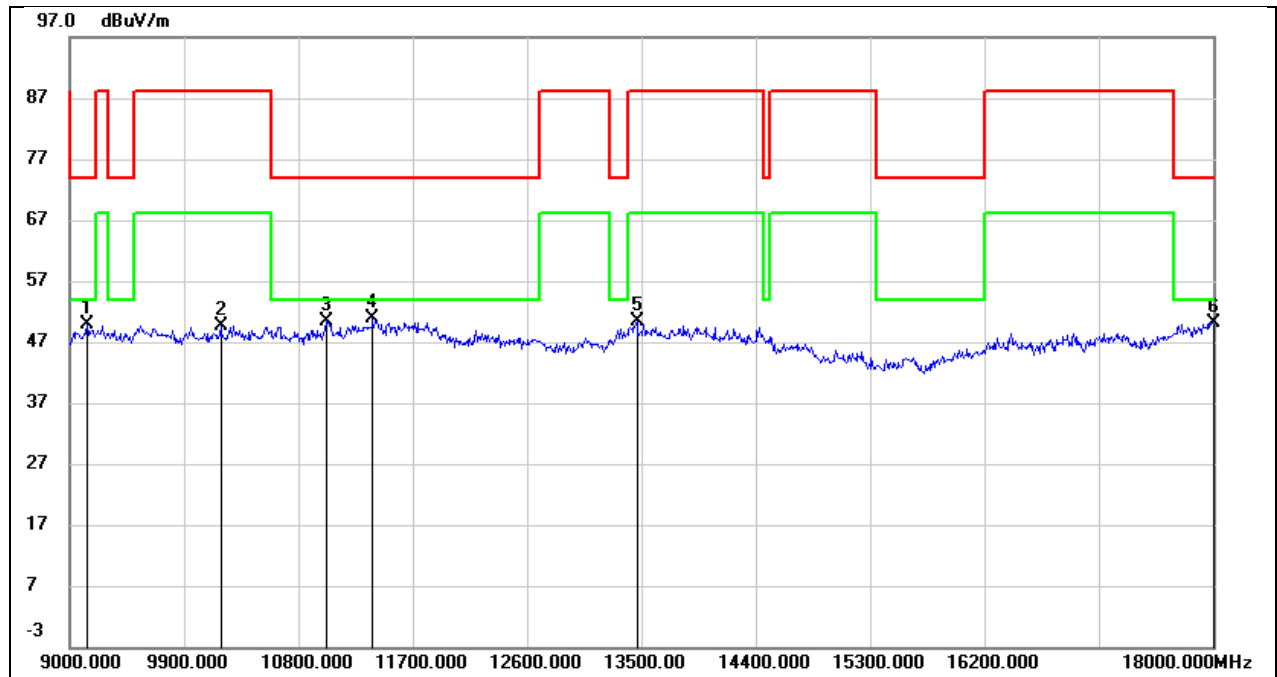


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9135.000        | 38.57          | 11.24          | 49.81           | 74.00          | -24.19      | peak   |
| 2   | 10188.000       | 36.03          | 13.64          | 49.67           | 88.20          | -38.53      | peak   |
| 3   | 11025.000       | 34.93          | 15.57          | 50.50           | 74.00          | -23.50      | peak   |
| 4   | 11385.000       | 33.39          | 17.40          | 50.79           | 74.00          | -23.21      | peak   |
| 5   | 13464.000       | 28.32          | 22.10          | 50.42           | 88.20          | -37.78      | peak   |
| 6   | 18000.000       | 21.02          | 29.20          | 50.22           | 74.00          | -23.78      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 5985      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

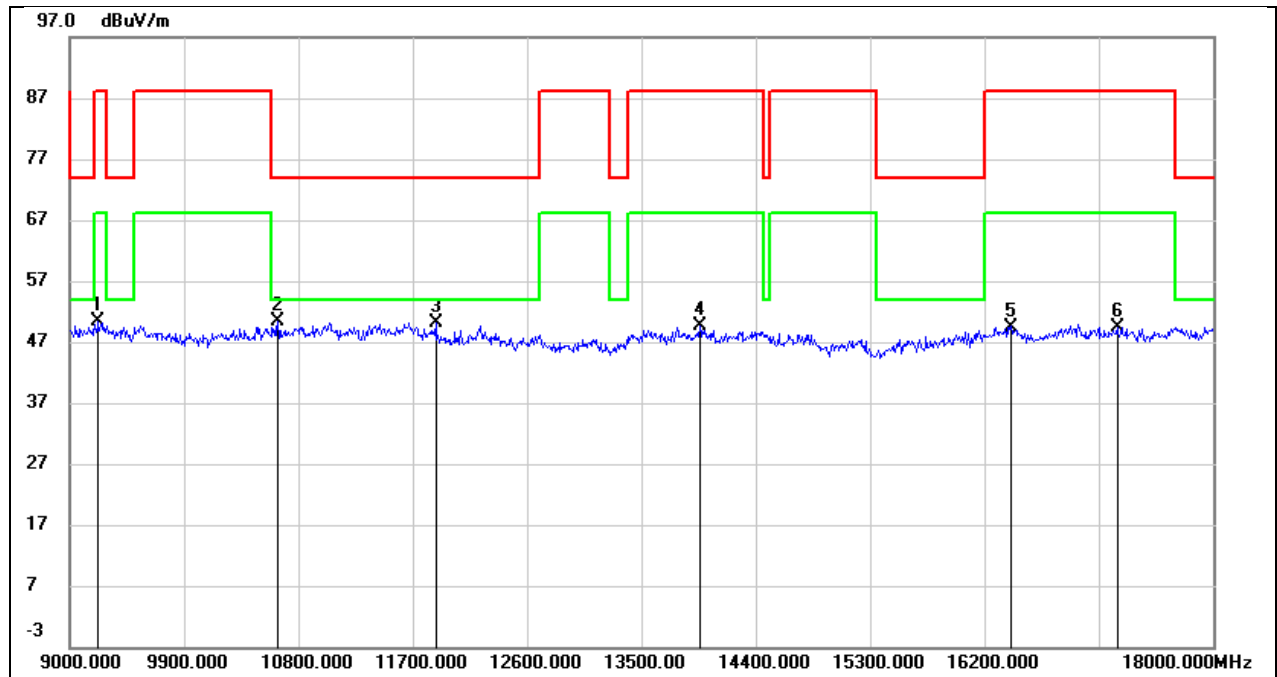


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9225.000        | 38.67          | 11.75          | 50.42           | 88.20          | -37.78      | peak   |
| 2   | 10638.000       | 36.08          | 14.22          | 50.30           | 74.00          | -23.70      | peak   |
| 3   | 11880.000       | 32.62          | 17.45          | 50.07           | 74.00          | -23.93      | peak   |
| 4   | 13959.000       | 27.98          | 21.53          | 49.51           | 88.20          | -38.69      | peak   |
| 5   | 16407.000       | 25.03          | 24.47          | 49.50           | 88.20          | -38.70      | peak   |
| 6   | 17244.000       | 24.66          | 24.83          | 49.49           | 88.20          | -38.71      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6145      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

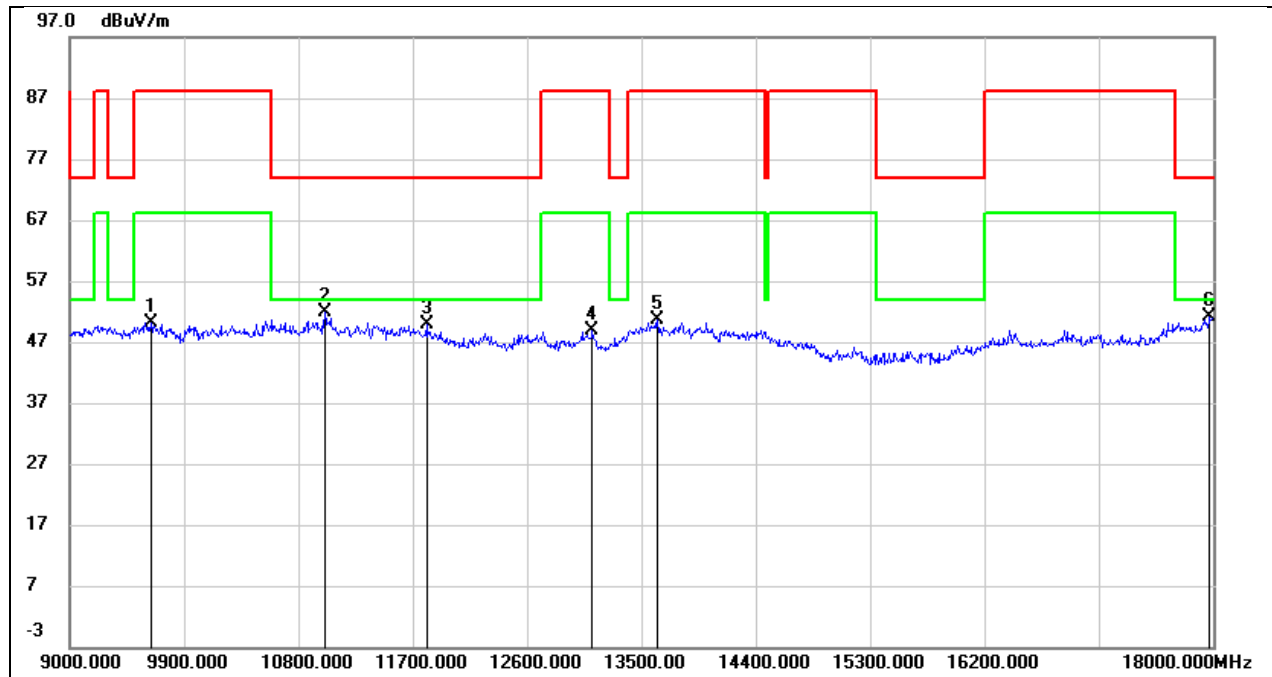


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9639.000        | 36.69          | 13.48          | 50.17           | 88.20          | -38.03      | peak   |
| 2   | 11007.000       | 36.41          | 15.49          | 51.90           | 74.00          | -22.10      | peak   |
| 3   | 11808.000       | 31.21          | 18.55          | 49.76           | 74.00          | -24.24      | peak   |
| 4   | 13113.000       | 28.49          | 20.43          | 48.92           | 88.20          | -39.28      | peak   |
| 5   | 13626.000       | 28.10          | 22.46          | 50.56           | 88.20          | -37.64      | peak   |
| 6   | 17973.000       | 22.20          | 28.94          | 51.14           | 74.00          | -22.86      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6145      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

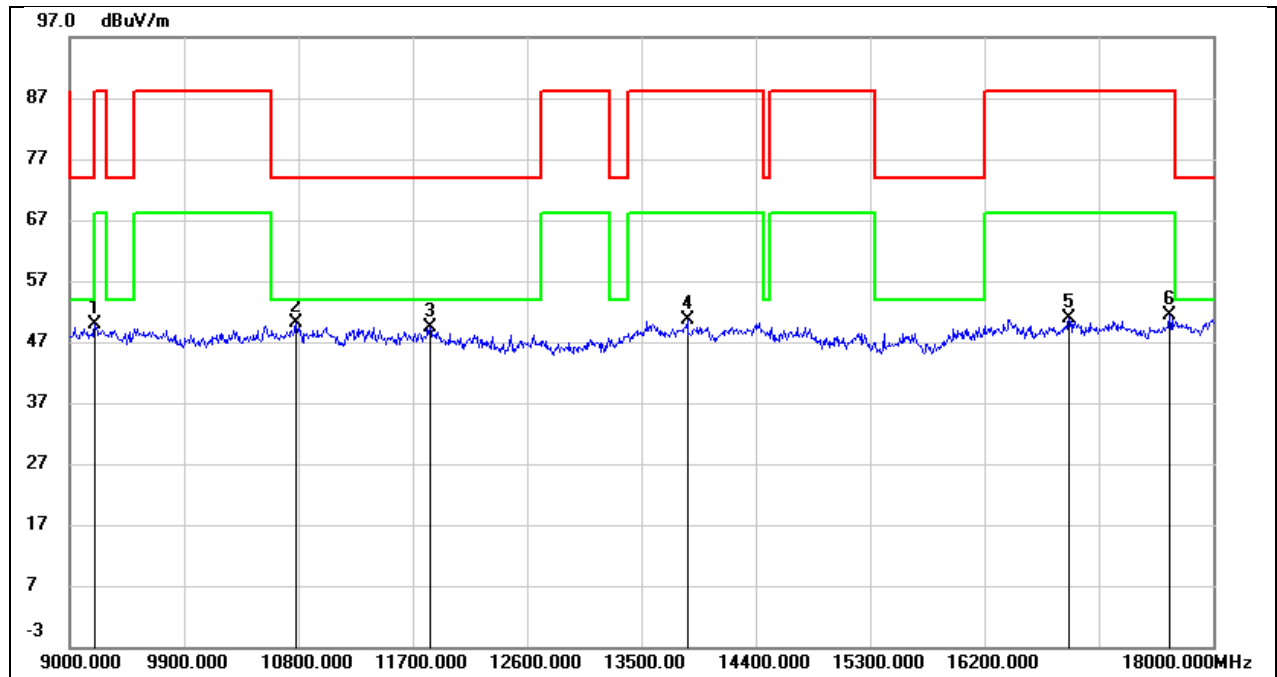


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9198.000        | 38.29          | 11.68          | 49.97           | 74.00          | -24.03      | peak   |
| 2   | 10782.000       | 35.63          | 14.40          | 50.03           | 74.00          | -23.97      | peak   |
| 3   | 11835.000       | 31.97          | 17.36          | 49.33           | 74.00          | -24.67      | peak   |
| 4   | 13860.000       | 29.28          | 21.26          | 50.54           | 88.20          | -37.66      | peak   |
| 5   | 16866.000       | 26.45          | 24.45          | 50.90           | 88.20          | -37.30      | peak   |
| 6   | 17658.000       | 25.97          | 25.43          | 51.40           | 88.20          | -36.80      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6385      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

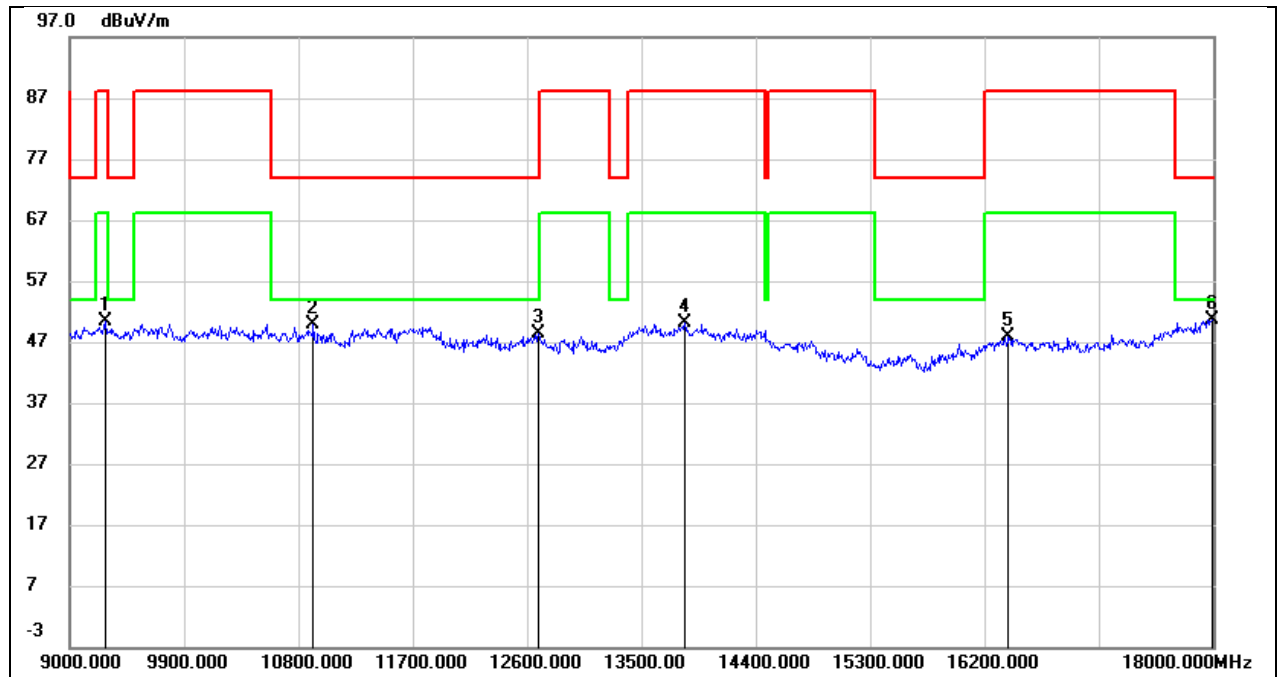


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9279.000        | 38.53          | 11.74          | 50.27           | 88.20          | -37.93      | peak   |
| 2   | 10917.000       | 34.52          | 15.26          | 49.78           | 74.00          | -24.22      | peak   |
| 3   | 12690.000       | 29.16          | 19.13          | 48.29           | 74.00          | -25.71      | peak   |
| 4   | 13842.000       | 27.21          | 22.84          | 50.05           | 88.20          | -38.15      | peak   |
| 5   | 16389.000       | 25.27          | 22.64          | 47.91           | 88.20          | -40.29      | peak   |
| 6   | 17991.000       | 21.64          | 29.11          | 50.75           | 74.00          | -23.25      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6385      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

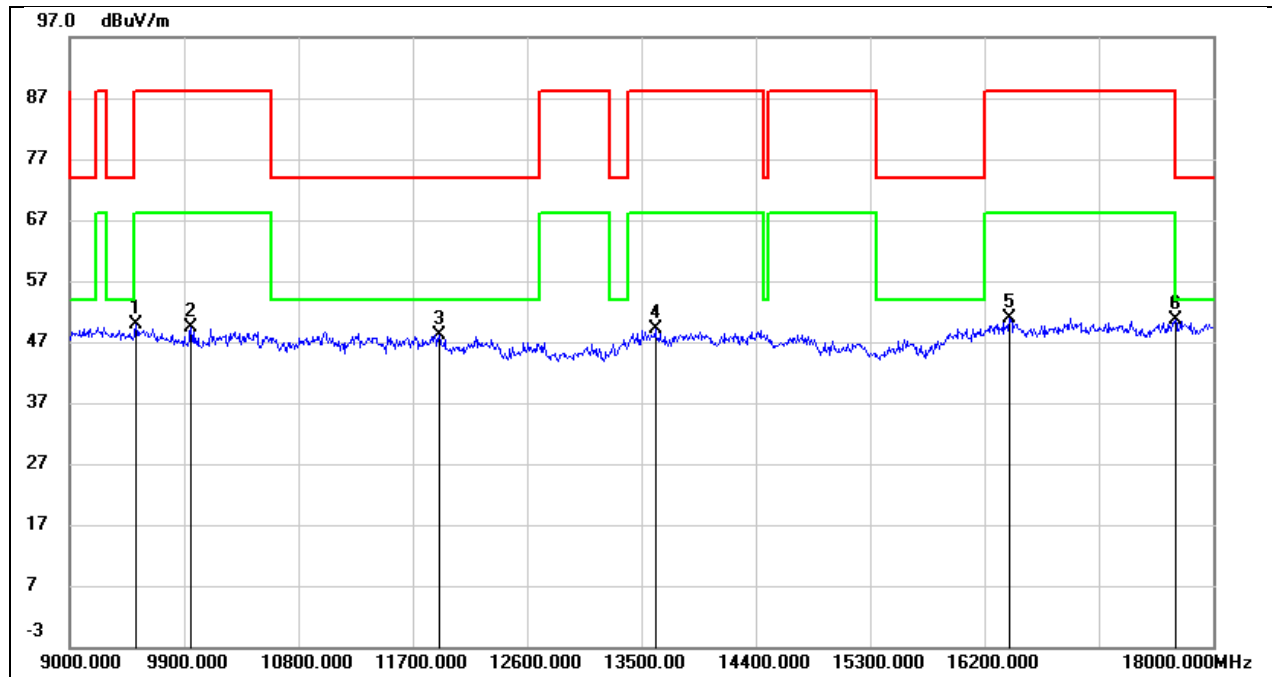


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9522.000        | 36.90          | 12.91          | 49.81           | 88.20          | -38.39      | peak   |
| 2   | 9954.000        | 36.27          | 13.16          | 49.43           | 88.20          | -38.77      | peak   |
| 3   | 11907.000       | 30.53          | 17.51          | 48.04           | 74.00          | -25.96      | peak   |
| 4   | 13608.000       | 28.49          | 20.75          | 49.24           | 88.20          | -38.96      | peak   |
| 5   | 16398.000       | 26.39          | 24.48          | 50.87           | 88.20          | -37.33      | peak   |
| 6   | 17703.000       | 25.14          | 25.60          | 50.74           | 74.00          | -23.26      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6465      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

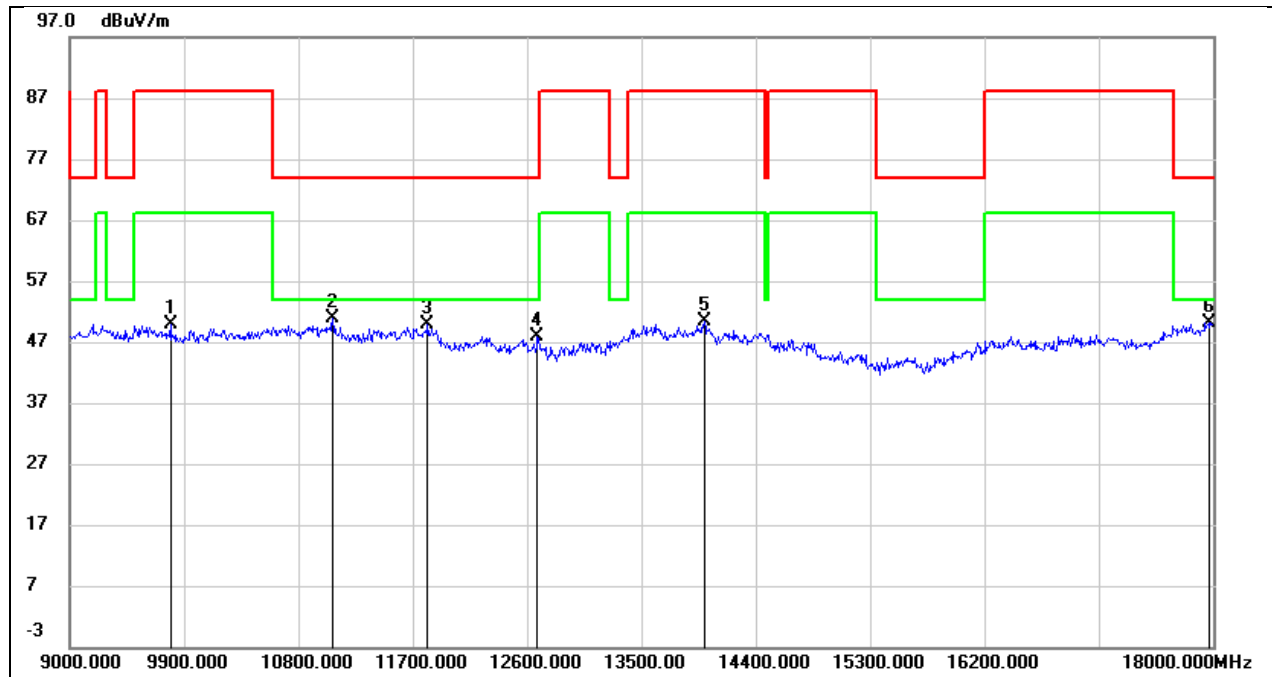


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9792.000        | 36.03          | 13.87          | 49.90           | 88.20          | -38.30      | peak   |
| 2   | 11070.000       | 35.01          | 15.78          | 50.79           | 74.00          | -23.21      | peak   |
| 3   | 11817.000       | 31.37          | 18.56          | 49.93           | 74.00          | -24.07      | peak   |
| 4   | 12681.000       | 28.82          | 19.10          | 47.92           | 74.00          | -26.08      | peak   |
| 5   | 13995.000       | 27.13          | 23.23          | 50.36           | 88.20          | -37.84      | peak   |
| 6   | 17964.000       | 21.25          | 28.86          | 50.11           | 74.00          | -23.89      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6465      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

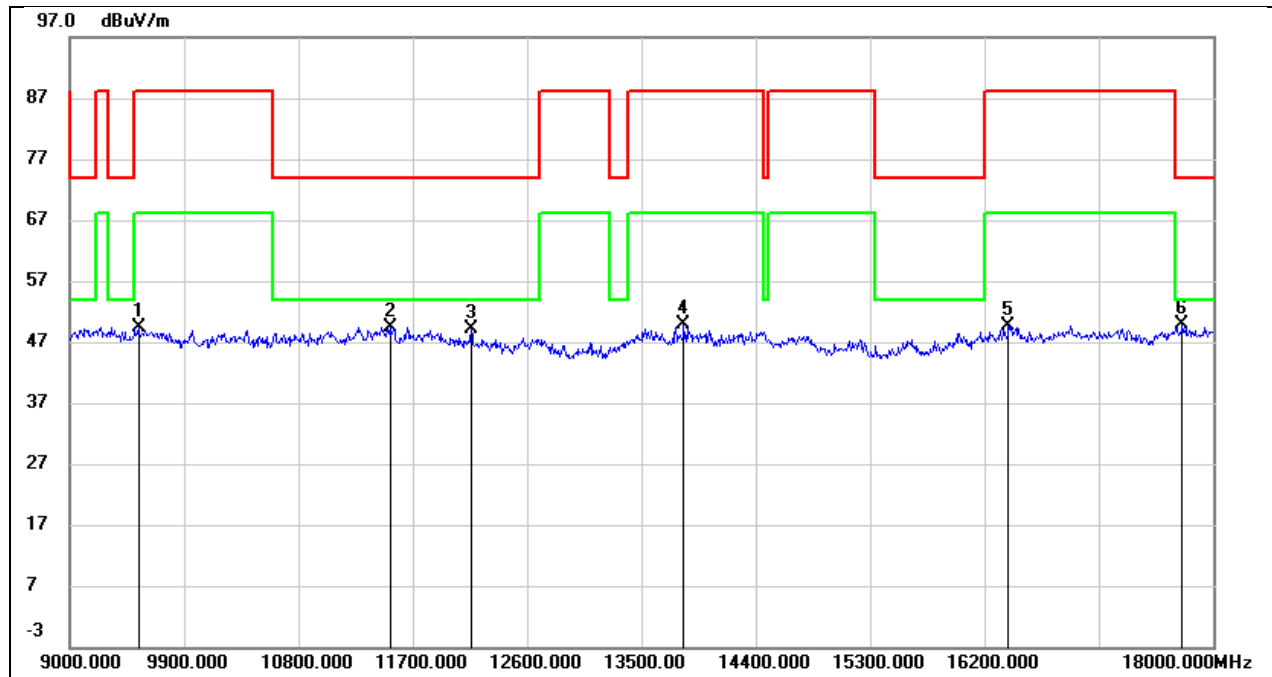


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9540.000        | 36.50          | 12.98          | 49.48           | 88.20          | -38.72      | peak   |
| 2   | 11520.000       | 32.79          | 16.71          | 49.50           | 74.00          | -24.50      | peak   |
| 3   | 12159.000       | 31.40          | 17.70          | 49.10           | 74.00          | -24.90      | peak   |
| 4   | 13833.000       | 28.71          | 21.19          | 49.90           | 88.20          | -38.30      | peak   |
| 5   | 16389.000       | 25.15          | 24.49          | 49.64           | 88.20          | -38.56      | peak   |
| 6   | 17757.000       | 24.11          | 25.81          | 49.92           | 74.00          | -24.08      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6545      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

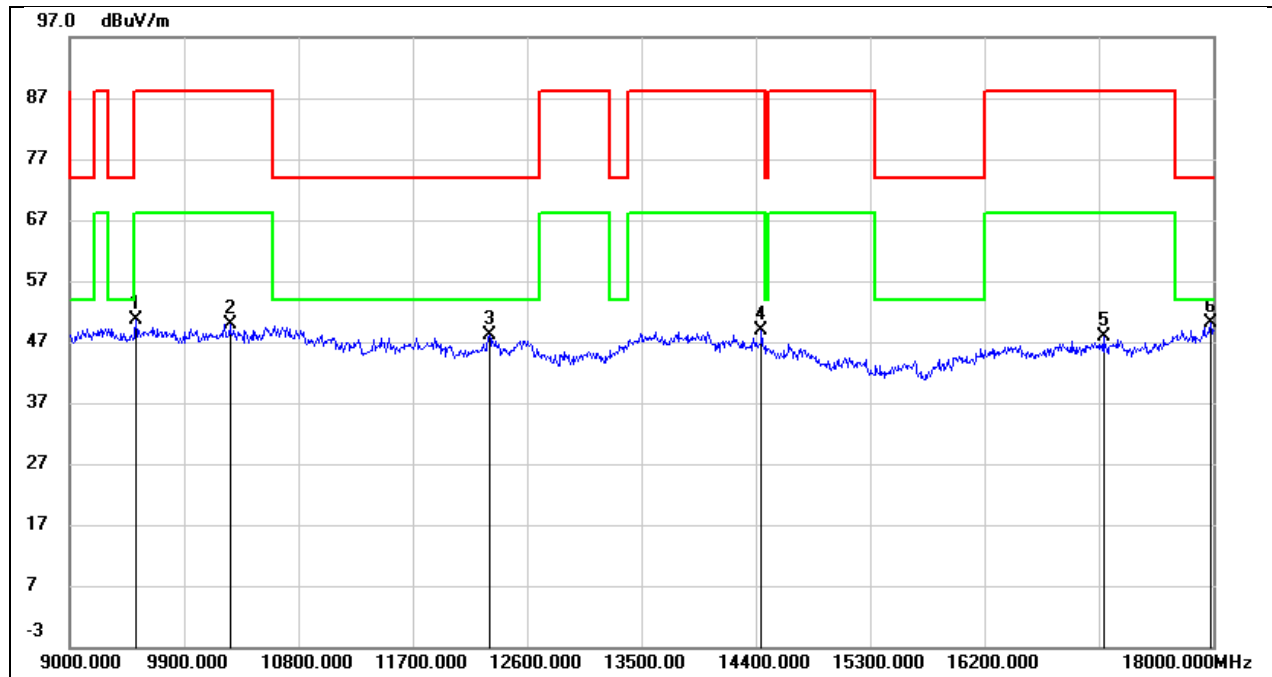


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9522.000        | 37.74          | 12.94          | 50.68           | 88.20          | -37.52      | peak   |
| 2   | 10260.000       | 36.11          | 13.72          | 49.83           | 88.20          | -38.37      | peak   |
| 3   | 12303.000       | 29.20          | 18.81          | 48.01           | 74.00          | -25.99      | peak   |
| 4   | 14445.000       | 27.27          | 21.50          | 48.77           | 88.20          | -39.43      | peak   |
| 5   | 17136.000       | 24.21          | 23.57          | 47.78           | 88.20          | -40.42      | peak   |
| 6   | 17982.000       | 21.04          | 29.03          | 50.07           | 74.00          | -23.93      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6545      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

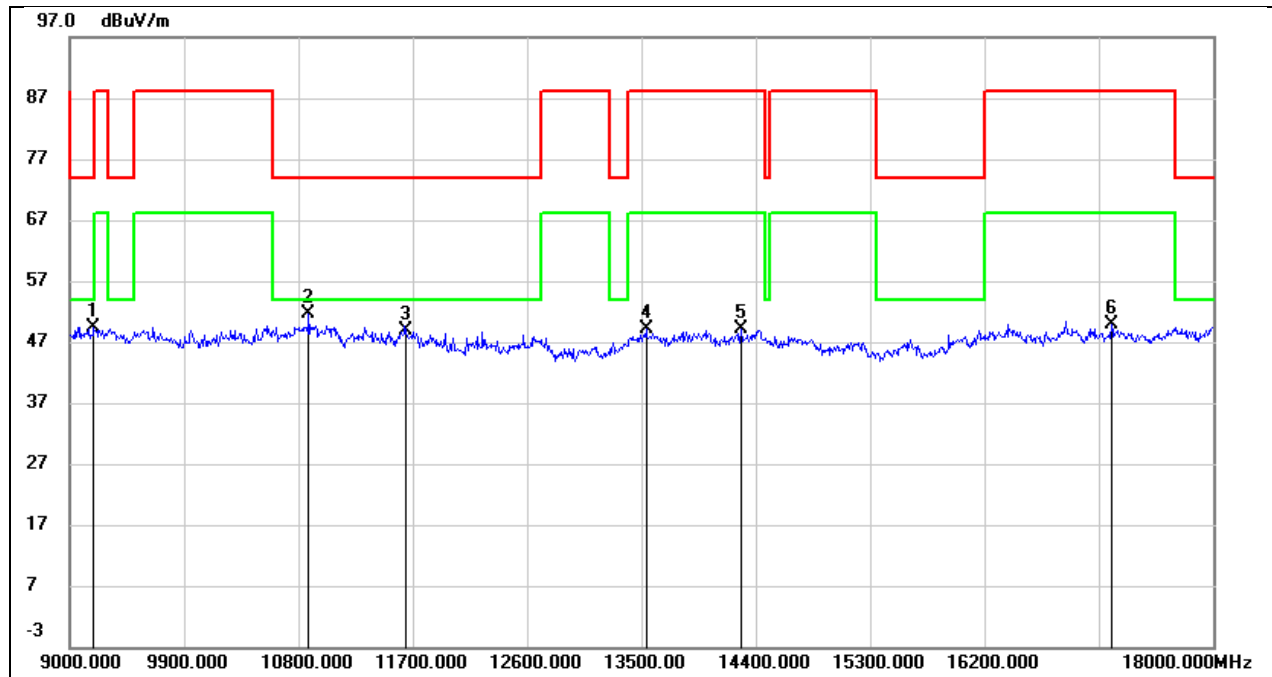


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9189.000        | 37.83          | 11.66          | 49.49           | 74.00          | -24.51      | peak   |
| 2   | 10881.000       | 37.12          | 14.51          | 51.63           | 74.00          | -22.37      | peak   |
| 3   | 11646.000       | 31.62          | 17.16          | 48.78           | 74.00          | -25.22      | peak   |
| 4   | 13536.000       | 28.48          | 20.61          | 49.09           | 88.20          | -39.11      | peak   |
| 5   | 14283.000       | 27.91          | 21.32          | 49.23           | 88.20          | -38.97      | peak   |
| 6   | 17199.000       | 25.01          | 24.82          | 49.83           | 88.20          | -38.37      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6705      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

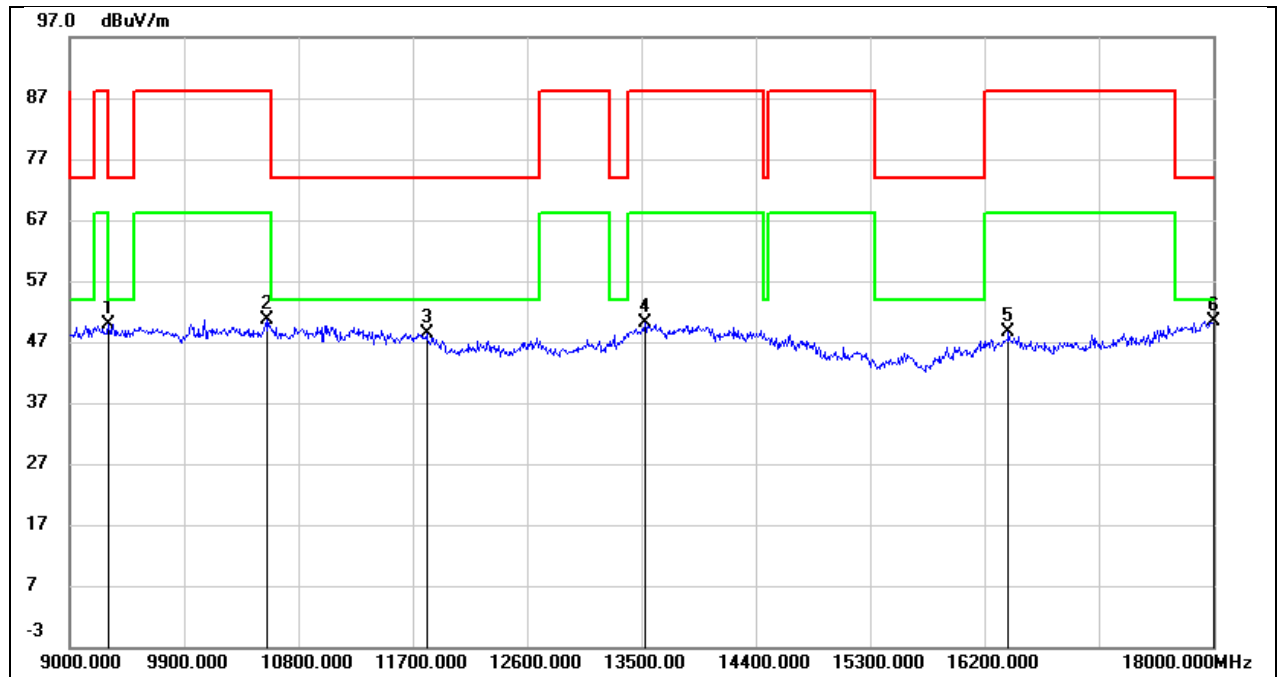


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9306.000        | 38.06          | 11.84          | 49.90           | 74.00          | -24.10      | peak   |
| 2   | 10548.000       | 36.28          | 14.31          | 50.59           | 88.20          | -37.61      | peak   |
| 3   | 11808.000       | 29.92          | 18.55          | 48.47           | 74.00          | -25.53      | peak   |
| 4   | 13527.000       | 27.72          | 22.29          | 50.01           | 88.20          | -38.19      | peak   |
| 5   | 16389.000       | 25.90          | 22.64          | 48.54           | 88.20          | -39.66      | peak   |
| 6   | 18000.000       | 21.28          | 29.20          | 50.48           | 74.00          | -23.52      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6705      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

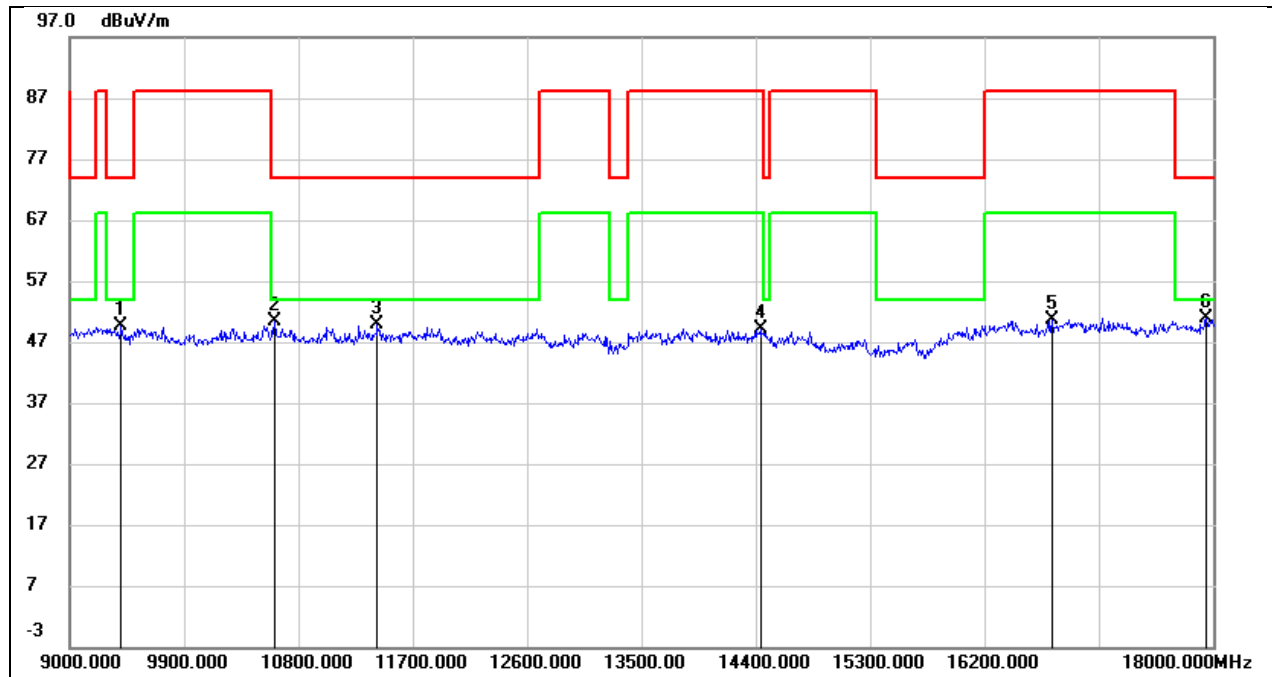


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9405.000        | 37.24          | 12.30          | 49.54           | 74.00          | -24.46      | peak   |
| 2   | 10611.000       | 36.24          | 14.20          | 50.44           | 74.00          | -23.56      | peak   |
| 3   | 11421.000       | 33.75          | 16.22          | 49.97           | 74.00          | -24.03      | peak   |
| 4   | 14436.000       | 28.12          | 21.08          | 49.20           | 88.20          | -39.00      | peak   |
| 5   | 16731.000       | 26.50          | 24.25          | 50.75           | 88.20          | -37.45      | peak   |
| 6   | 17946.000       | 24.04          | 26.73          | 50.77           | 74.00          | -23.23      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6785      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

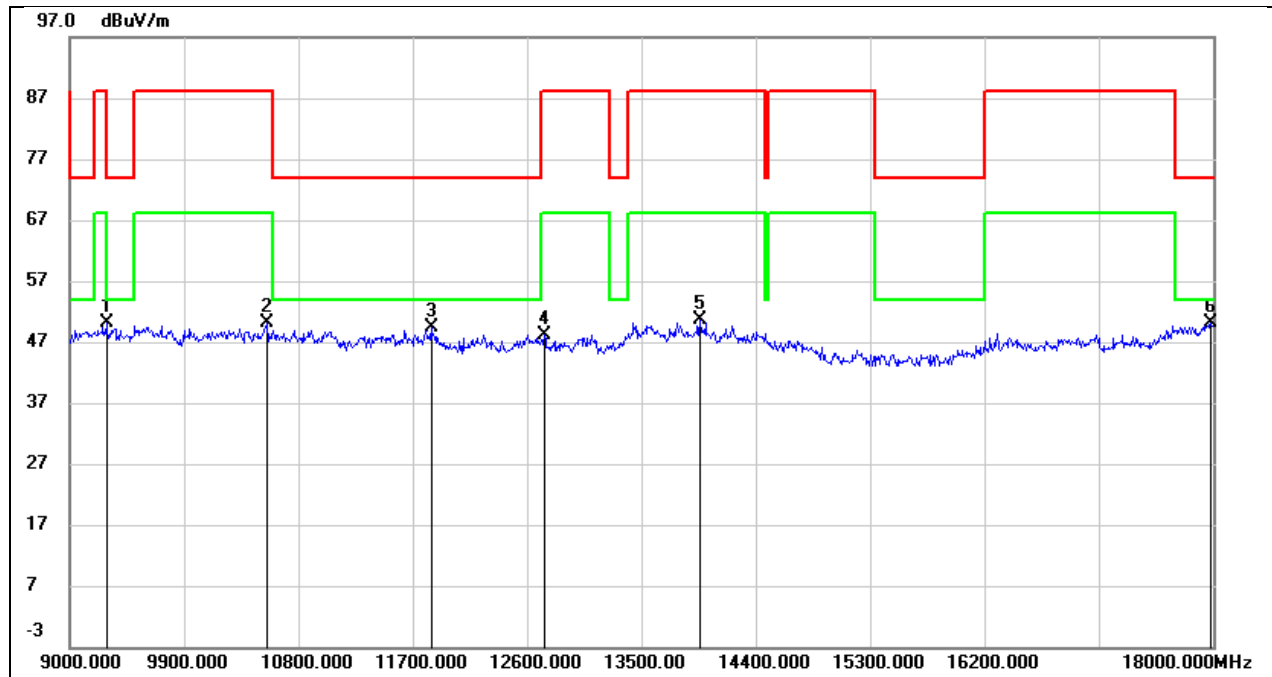


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9288.000        | 38.38          | 11.76          | 50.14           | 88.20          | -38.06      | peak   |
| 2   | 10557.000       | 35.91          | 14.34          | 50.25           | 88.20          | -37.95      | peak   |
| 3   | 11844.000       | 30.70          | 18.59          | 49.29           | 74.00          | -24.71      | peak   |
| 4   | 12735.000       | 28.98          | 19.25          | 48.23           | 88.20          | -39.97      | peak   |
| 5   | 13959.000       | 27.54          | 23.14          | 50.68           | 88.20          | -37.52      | peak   |
| 6   | 17982.000       | 21.07          | 29.03          | 50.10           | 74.00          | -23.90      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6785      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

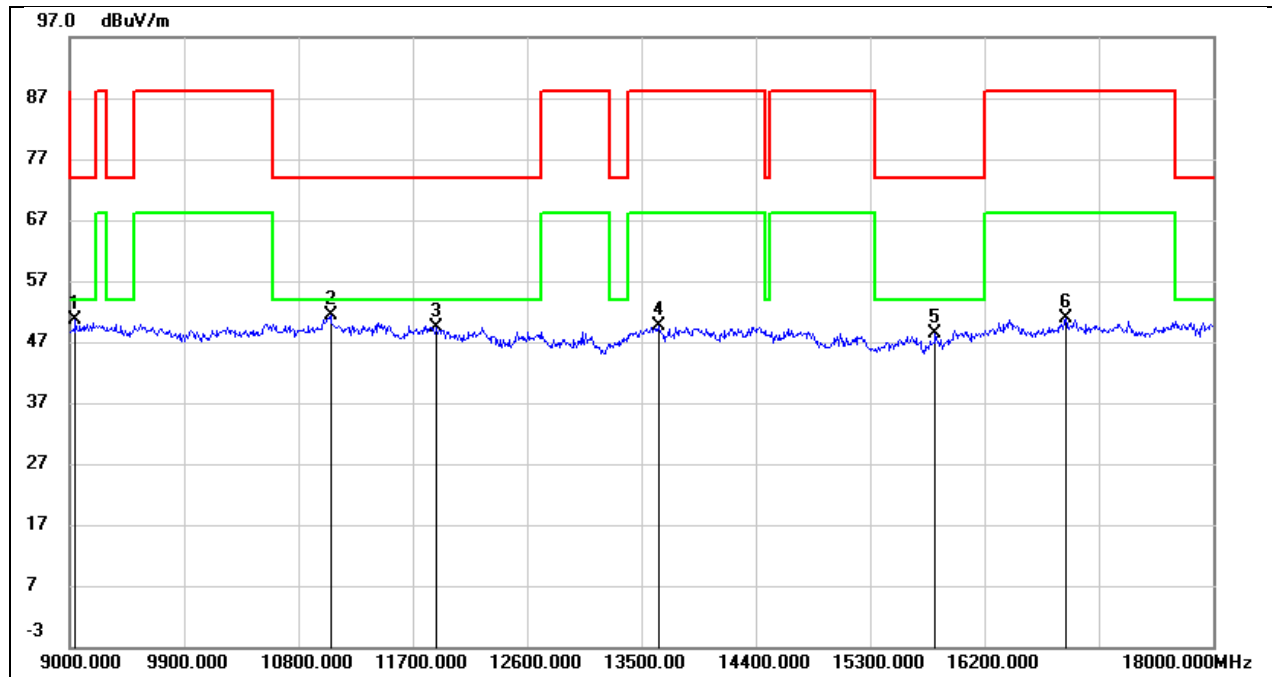


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9045.000        | 39.25          | 11.31          | 50.56           | 74.00          | -23.44      | peak   |
| 2   | 11052.000       | 36.56          | 14.82          | 51.38           | 74.00          | -22.62      | peak   |
| 3   | 11889.000       | 32.03          | 17.47          | 49.50           | 74.00          | -24.50      | peak   |
| 4   | 13635.000       | 28.77          | 20.81          | 49.58           | 88.20          | -38.62      | peak   |
| 5   | 15813.000       | 26.64          | 21.66          | 48.30           | 74.00          | -25.70      | peak   |
| 6   | 16839.000       | 26.45          | 24.39          | 50.84           | 88.20          | -37.36      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6865      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

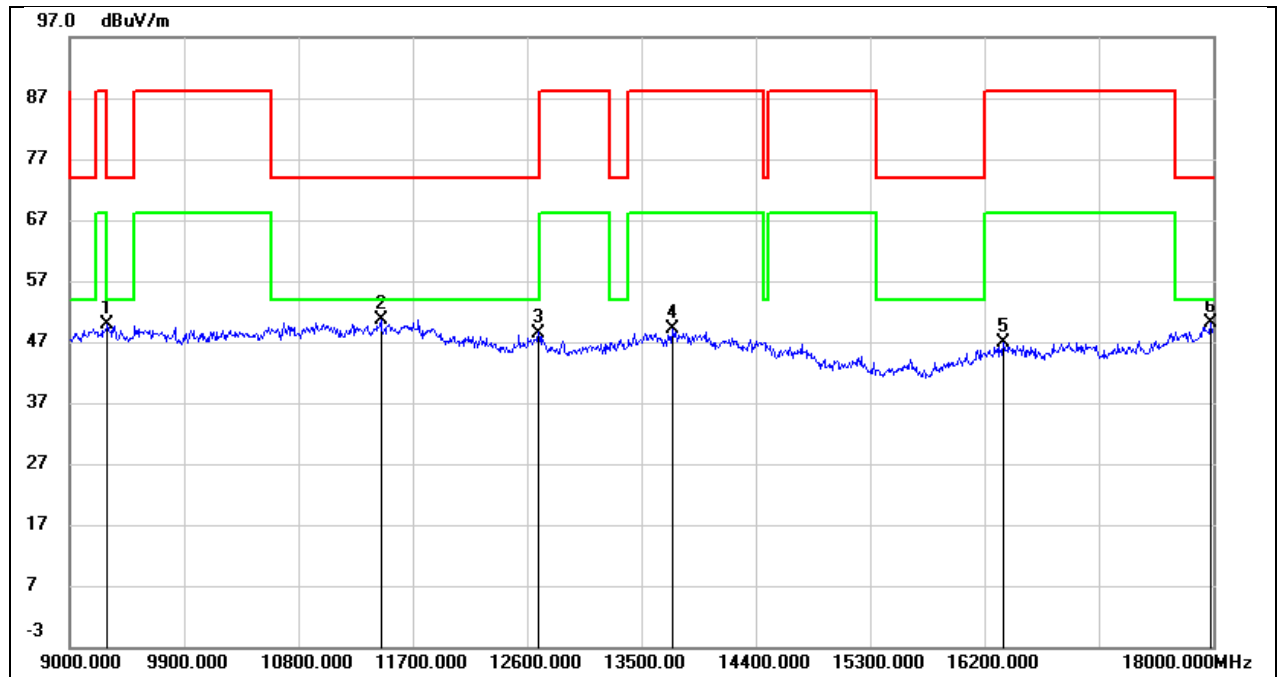


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9297.000        | 38.06          | 11.81          | 49.87           | 88.20          | -38.33      | peak   |
| 2   | 11448.000       | 32.82          | 17.78          | 50.60           | 74.00          | -23.40      | peak   |
| 3   | 12690.000       | 29.37          | 19.13          | 48.50           | 74.00          | -25.50      | peak   |
| 4   | 13743.000       | 26.48          | 22.65          | 49.13           | 88.20          | -39.07      | peak   |
| 5   | 16344.000       | 24.31          | 22.64          | 46.95           | 88.20          | -41.25      | peak   |
| 6   | 17982.000       | 21.02          | 29.03          | 50.05           | 74.00          | -23.95      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6865      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

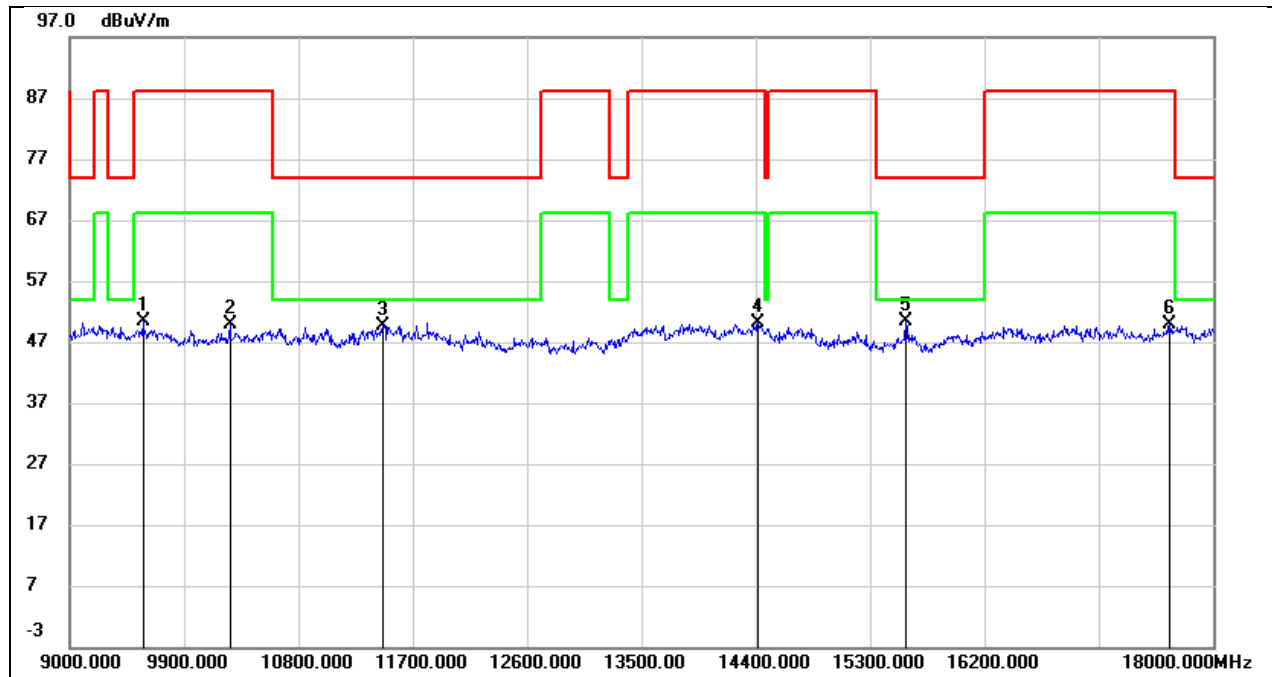


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9576.000        | 37.31          | 13.14          | 50.45           | 88.20          | -37.75      | peak   |
| 2   | 10260.000       | 36.65          | 13.28          | 49.93           | 88.20          | -38.27      | peak   |
| 3   | 11466.000       | 33.20          | 16.44          | 49.64           | 74.00          | -24.36      | peak   |
| 4   | 14418.000       | 28.99          | 21.11          | 50.10           | 88.20          | -38.10      | peak   |
| 5   | 15579.000       | 29.72          | 20.63          | 50.35           | 74.00          | -23.65      | peak   |
| 6   | 17658.000       | 24.41          | 25.43          | 49.84           | 88.20          | -38.36      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6945      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

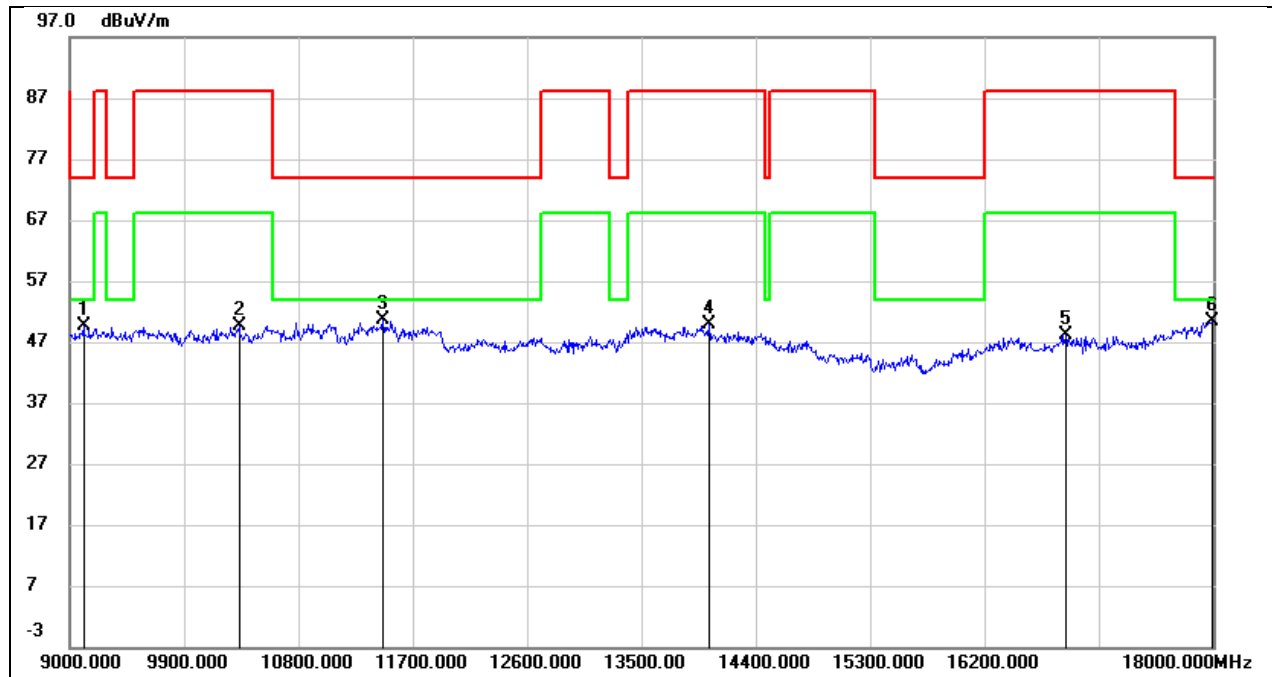


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9108.000        | 38.48          | 11.14          | 49.62           | 74.00          | -24.38      | peak   |
| 2   | 10332.000       | 35.75          | 13.80          | 49.55           | 88.20          | -38.65      | peak   |
| 3   | 11466.000       | 32.62          | 17.90          | 50.52           | 74.00          | -23.48      | peak   |
| 4   | 14031.000       | 26.77          | 23.13          | 49.90           | 88.20          | -38.30      | peak   |
| 5   | 16839.000       | 25.51          | 22.69          | 48.20           | 88.20          | -40.00      | peak   |
| 6   | 17991.000       | 21.19          | 29.11          | 50.30           | 74.00          | -23.70      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 6945      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

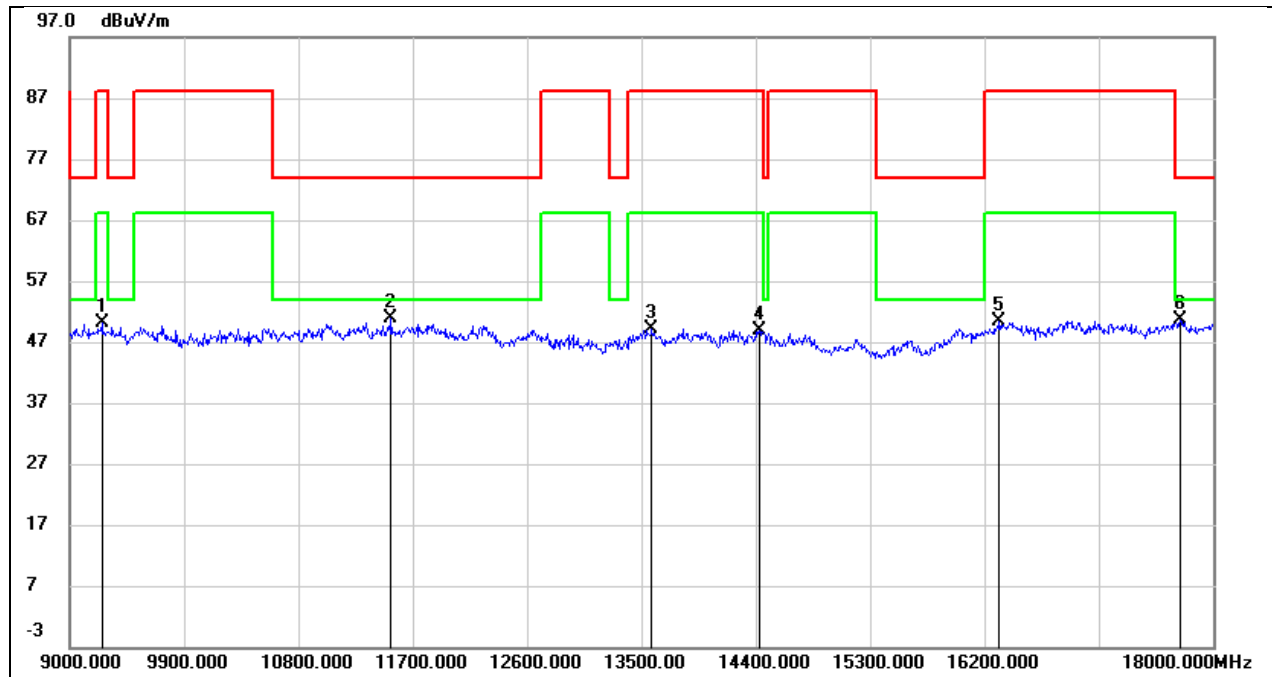


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9252.000        | 38.20          | 11.83          | 50.03           | 88.20          | -38.17      | peak   |
| 2   | 11529.000       | 34.23          | 16.76          | 50.99           | 74.00          | -23.01      | peak   |
| 3   | 13581.000       | 28.50          | 20.70          | 49.20           | 88.20          | -39.00      | peak   |
| 4   | 14427.000       | 27.72          | 21.09          | 48.81           | 88.20          | -39.39      | peak   |
| 5   | 16317.000       | 25.85          | 24.59          | 50.44           | 88.20          | -37.76      | peak   |
| 6   | 17739.000       | 24.86          | 25.74          | 50.60           | 74.00          | -23.40      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 7025      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

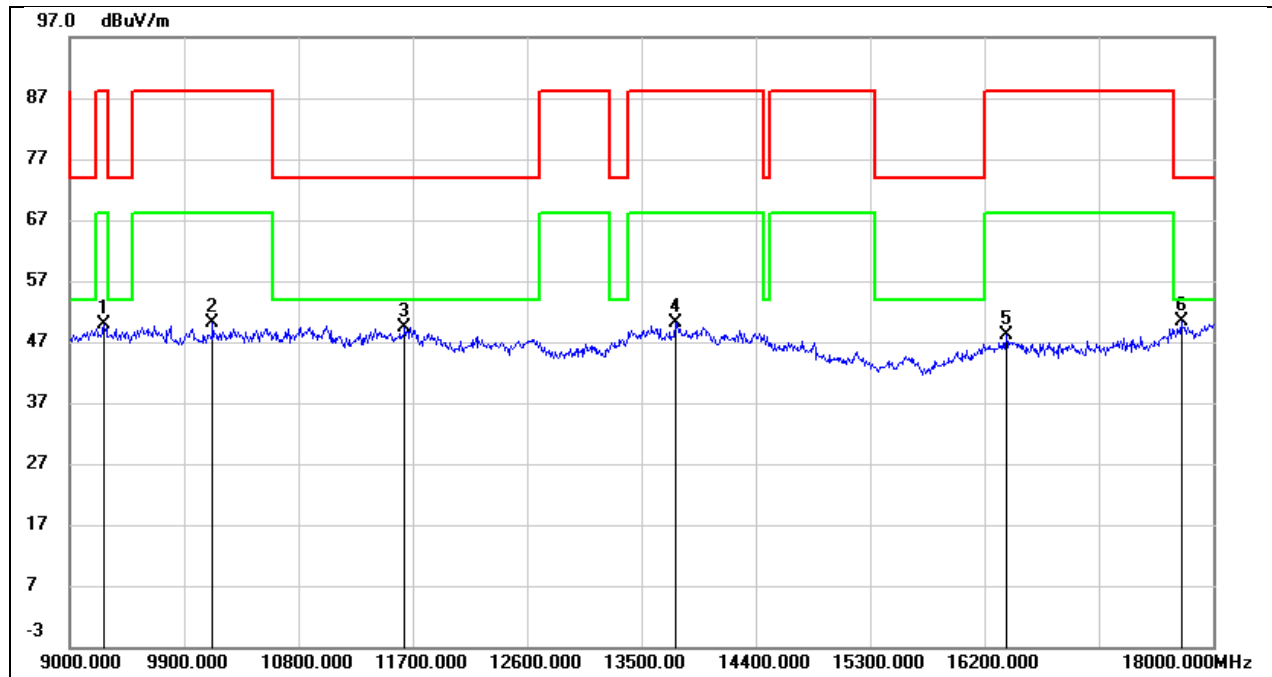


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9270.000        | 38.07          | 11.70          | 49.77           | 88.20          | -38.43      | peak   |
| 2   | 10125.000       | 36.37          | 13.69          | 50.06           | 88.20          | -38.14      | peak   |
| 3   | 11637.000       | 30.80          | 18.55          | 49.35           | 74.00          | -24.65      | peak   |
| 4   | 13770.000       | 27.50          | 22.69          | 50.19           | 88.20          | -38.01      | peak   |
| 5   | 16371.000       | 25.41          | 22.63          | 48.04           | 88.20          | -40.16      | peak   |
| 6   | 17748.000       | 23.60          | 26.87          | 50.47           | 74.00          | -23.53      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE80 | Frequency(MHz): | 7025      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

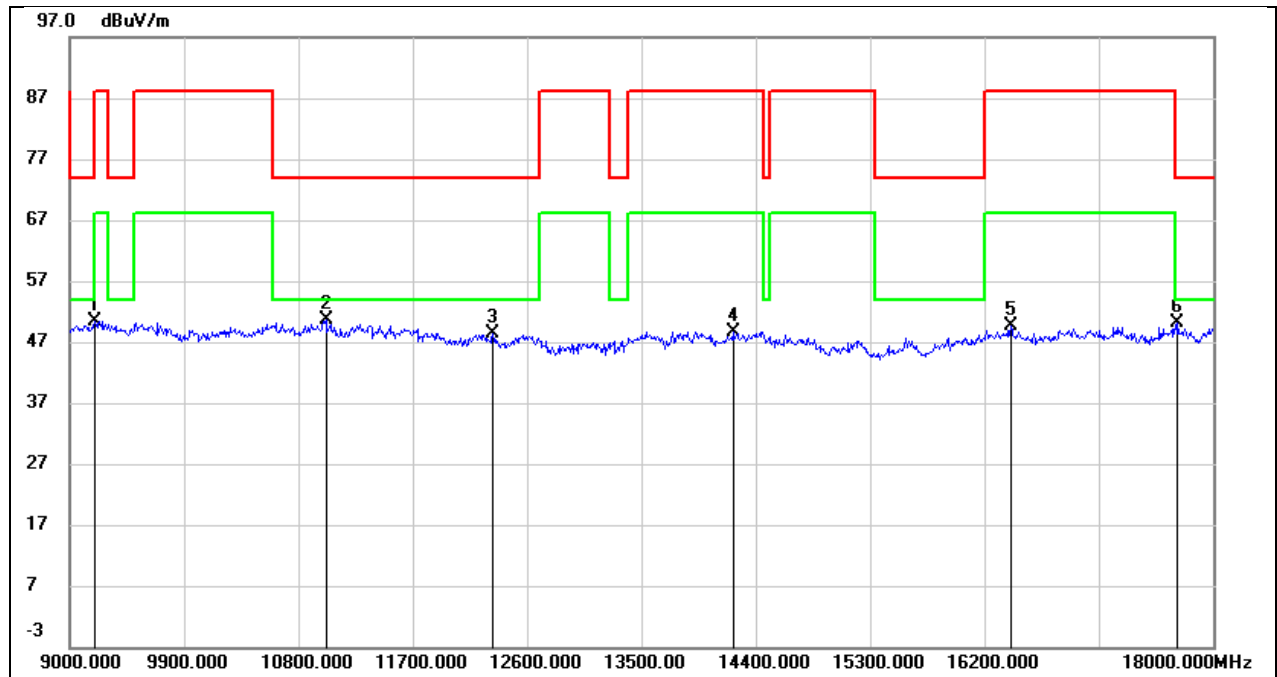


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9198.000        | 38.81          | 11.68          | 50.49           | 74.00          | -23.51      | peak   |
| 2   | 11016.000       | 35.83          | 14.71          | 50.54           | 74.00          | -23.46      | peak   |
| 3   | 12330.000       | 30.63          | 17.87          | 48.50           | 74.00          | -25.50      | peak   |
| 4   | 14220.000       | 27.27          | 21.43          | 48.70           | 88.20          | -39.50      | peak   |
| 5   | 16407.000       | 25.14          | 24.47          | 49.61           | 88.20          | -38.59      | peak   |
| 6   | 17721.000       | 24.44          | 25.67          | 50.11           | 74.00          | -23.89      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6025      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

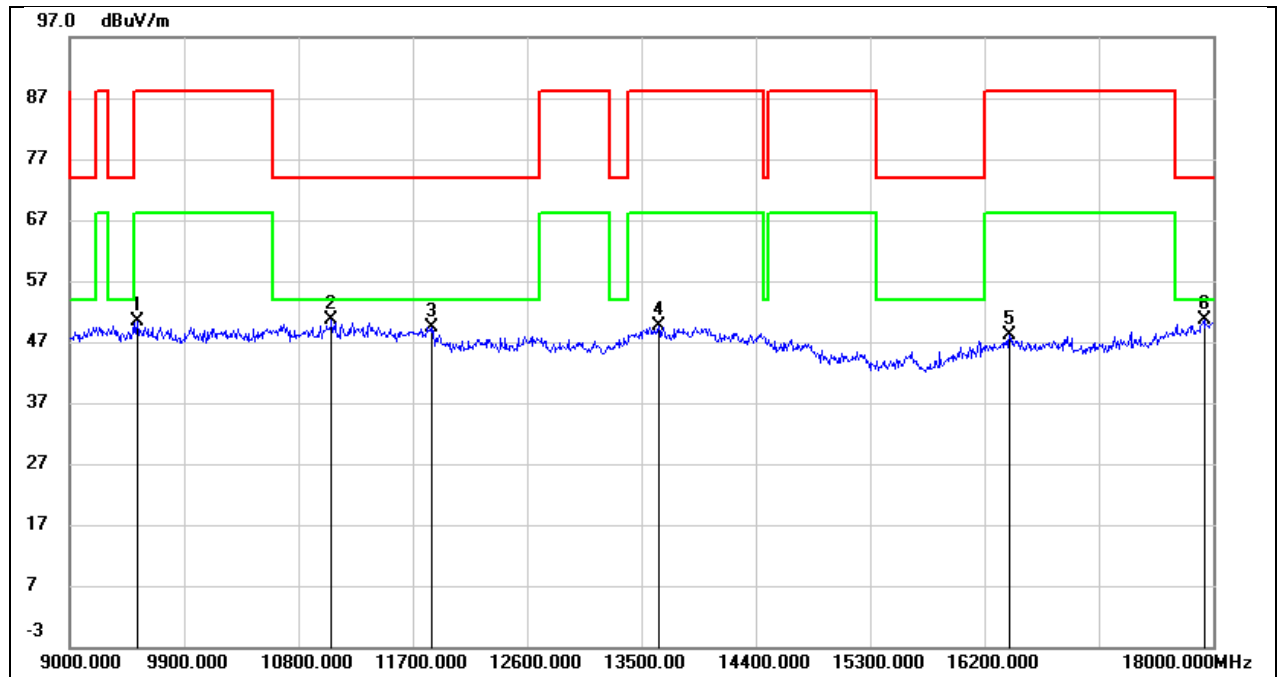


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9531.000        | 37.47          | 12.99          | 50.46           | 88.20          | -37.74      | peak   |
| 2   | 11061.000       | 34.91          | 15.74          | 50.65           | 74.00          | -23.35      | peak   |
| 3   | 11853.000       | 30.85          | 18.61          | 49.46           | 74.00          | -24.54      | peak   |
| 4   | 13635.000       | 27.05          | 22.48          | 49.53           | 88.20          | -38.67      | peak   |
| 5   | 16398.000       | 25.37          | 22.64          | 48.01           | 88.20          | -40.19      | peak   |
| 6   | 17928.000       | 22.22          | 28.51          | 50.73           | 74.00          | -23.27      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6025      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

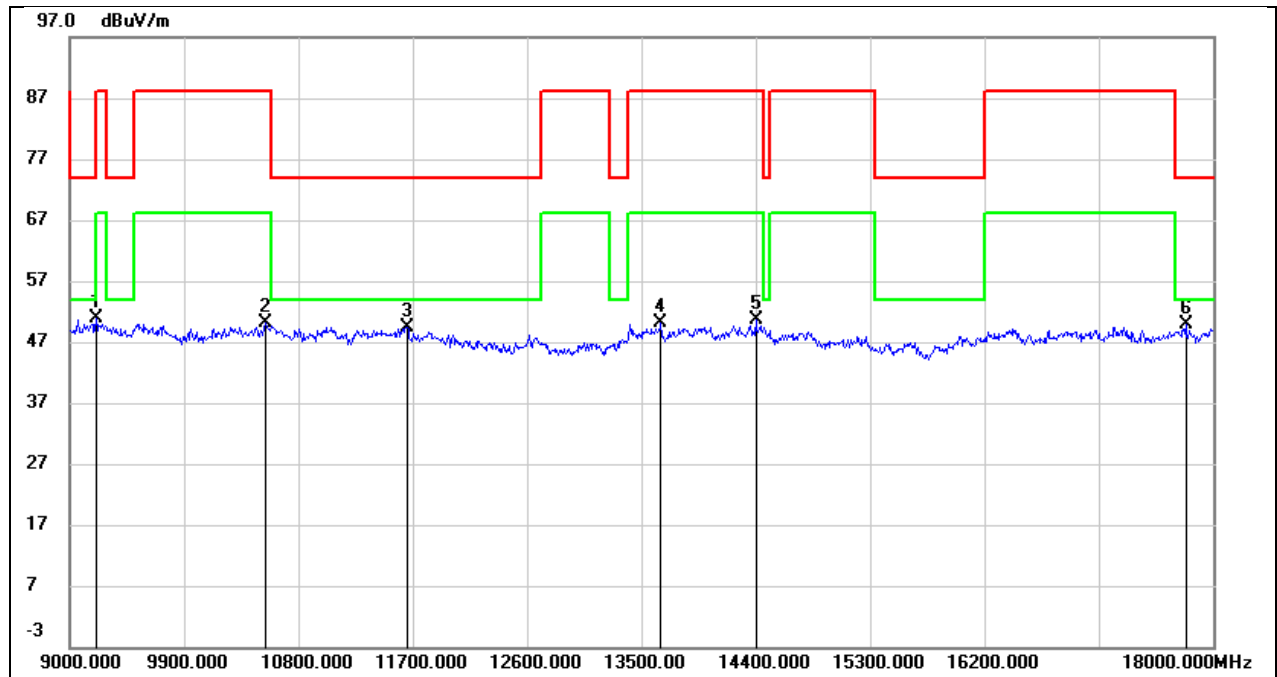


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9207.000        | 39.15          | 11.71          | 50.86           | 88.20          | -37.34      | peak   |
| 2   | 10539.000       | 36.18          | 14.02          | 50.20           | 88.20          | -38.00      | peak   |
| 3   | 11655.000       | 32.29          | 17.17          | 49.46           | 74.00          | -24.54      | peak   |
| 4   | 13653.000       | 29.37          | 20.83          | 50.20           | 88.20          | -38.00      | peak   |
| 5   | 14400.000       | 29.40          | 21.14          | 50.54           | 88.20          | -37.66      | peak   |
| 6   | 17784.000       | 23.88          | 25.91          | 49.79           | 74.00          | -24.21      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6185      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

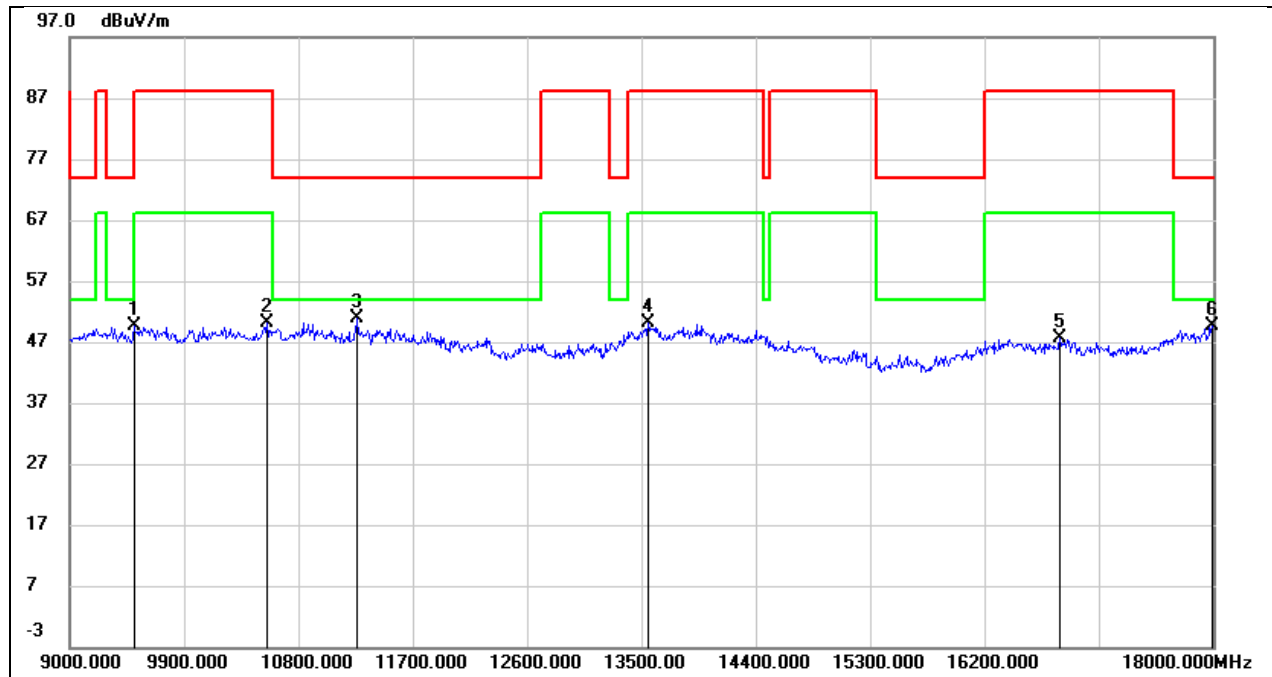


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9504.000        | 36.68          | 12.84          | 49.52           | 88.20          | -38.68      | peak   |
| 2   | 10548.000       | 35.89          | 14.31          | 50.20           | 88.20          | -38.00      | peak   |
| 3   | 11259.000       | 34.08          | 16.72          | 50.80           | 74.00          | -23.20      | peak   |
| 4   | 13554.000       | 27.84          | 22.33          | 50.17           | 88.20          | -38.03      | peak   |
| 5   | 16794.000       | 25.05          | 22.59          | 47.64           | 88.20          | -40.56      | peak   |
| 6   | 17991.000       | 20.42          | 29.11          | 49.53           | 74.00          | -24.47      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6185      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

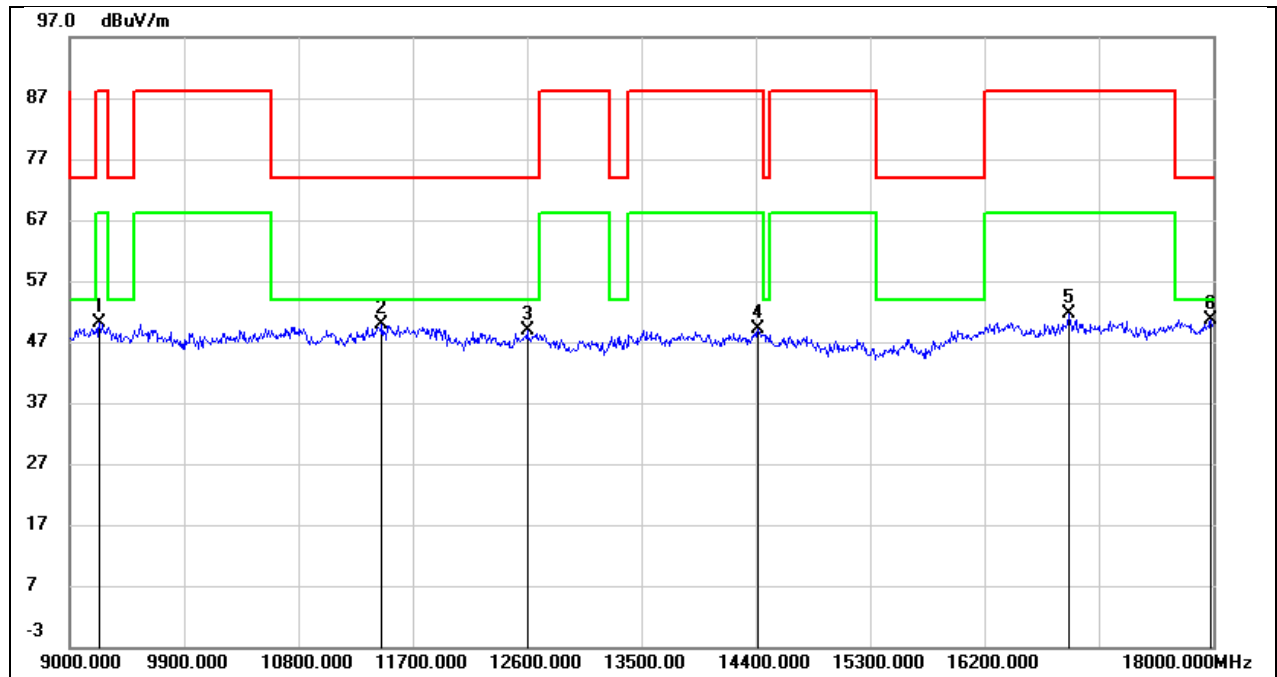


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9234.000        | 38.33          | 11.78          | 50.11           | 88.20          | -38.09      | peak   |
| 2   | 11457.000       | 33.41          | 16.40          | 49.81           | 74.00          | -24.19      | peak   |
| 3   | 12600.000       | 31.00          | 17.92          | 48.92           | 74.00          | -25.08      | peak   |
| 4   | 14418.000       | 27.90          | 21.11          | 49.01           | 88.20          | -39.19      | peak   |
| 5   | 16866.000       | 27.08          | 24.45          | 51.53           | 88.20          | -36.67      | peak   |
| 6   | 17982.000       | 23.84          | 26.91          | 50.75           | 74.00          | -23.25      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6345      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

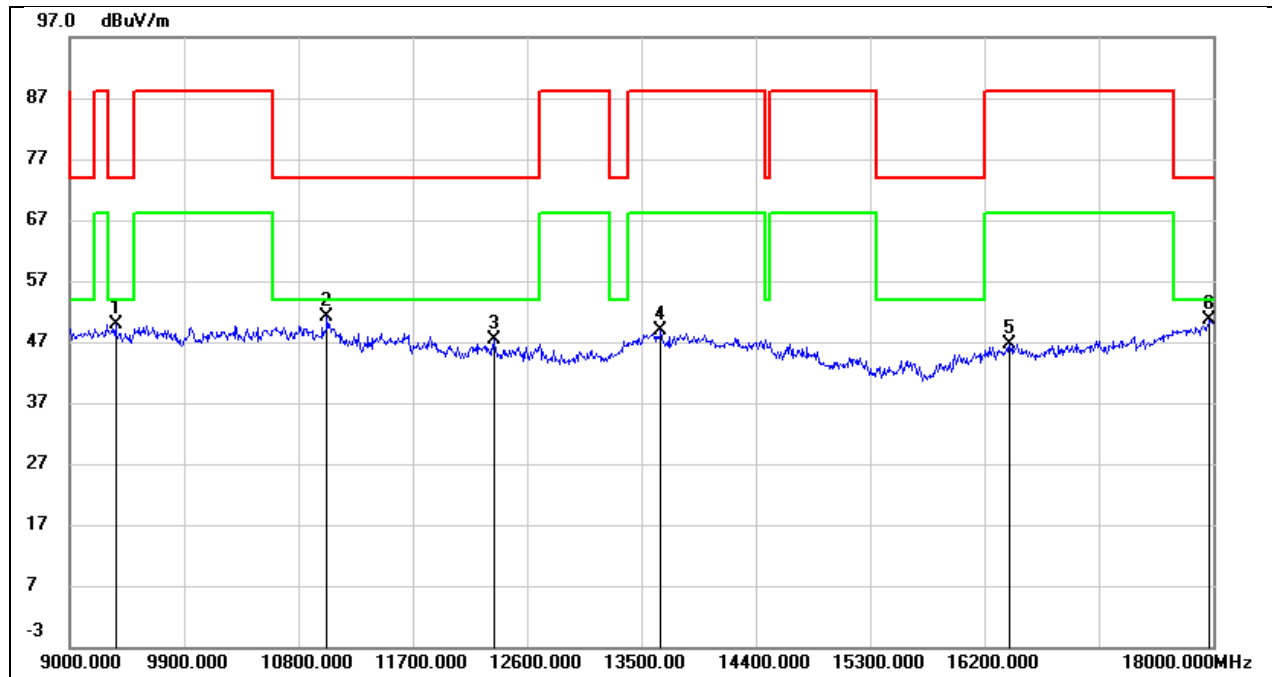


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9360.000        | 37.87          | 12.05          | 49.92           | 74.00          | -24.08      | peak   |
| 2   | 11025.000       | 35.53          | 15.57          | 51.10           | 74.00          | -22.90      | peak   |
| 3   | 12339.000       | 28.43          | 18.83          | 47.26           | 74.00          | -26.74      | peak   |
| 4   | 13653.000       | 26.27          | 22.50          | 48.77           | 88.20          | -39.43      | peak   |
| 5   | 16398.000       | 24.03          | 22.64          | 46.67           | 88.20          | -41.53      | peak   |
| 6   | 17973.000       | 21.64          | 28.94          | 50.58           | 74.00          | -23.42      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6345      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

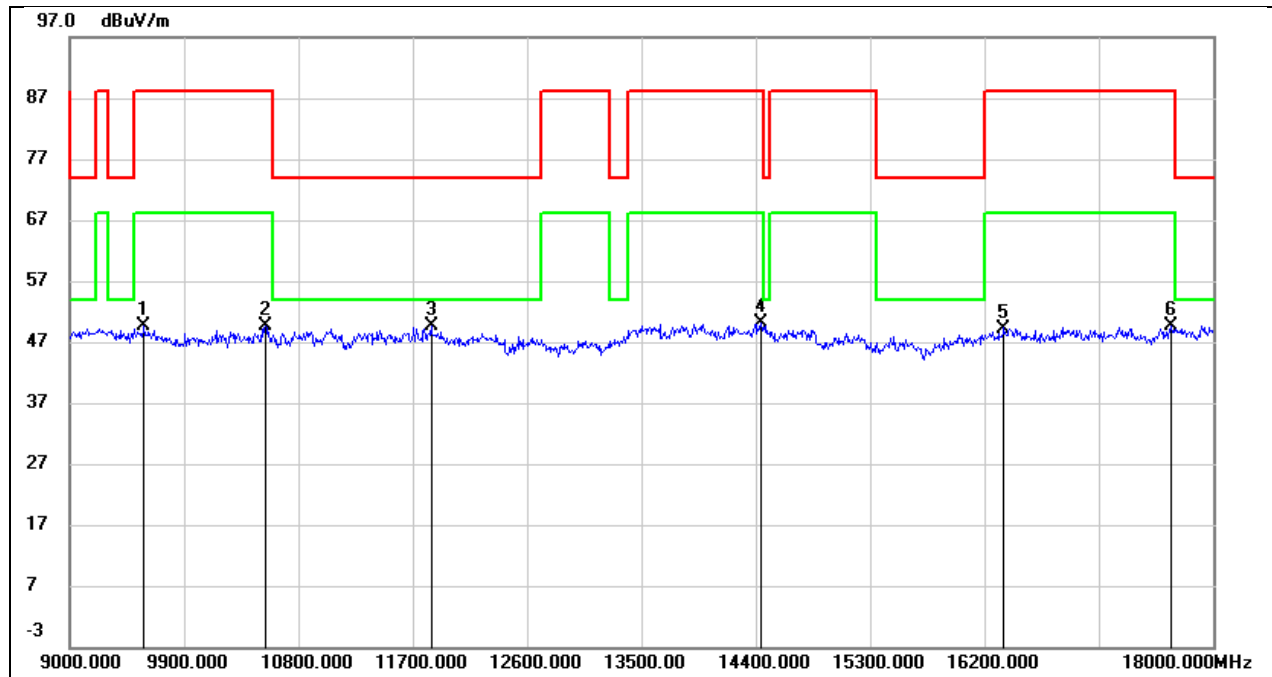


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.41          | 13.18          | 49.59           | 88.20          | -38.61      | peak   |
| 2   | 10539.000       | 35.63          | 14.02          | 49.65           | 88.20          | -38.55      | peak   |
| 3   | 11844.000       | 32.15          | 17.36          | 49.51           | 74.00          | -24.49      | peak   |
| 4   | 14445.000       | 29.01          | 21.05          | 50.06           | 88.20          | -38.14      | peak   |
| 5   | 16353.000       | 24.71          | 24.54          | 49.25           | 88.20          | -38.95      | peak   |
| 6   | 17667.000       | 24.17          | 25.46          | 49.63           | 88.20          | -38.57      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6505      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

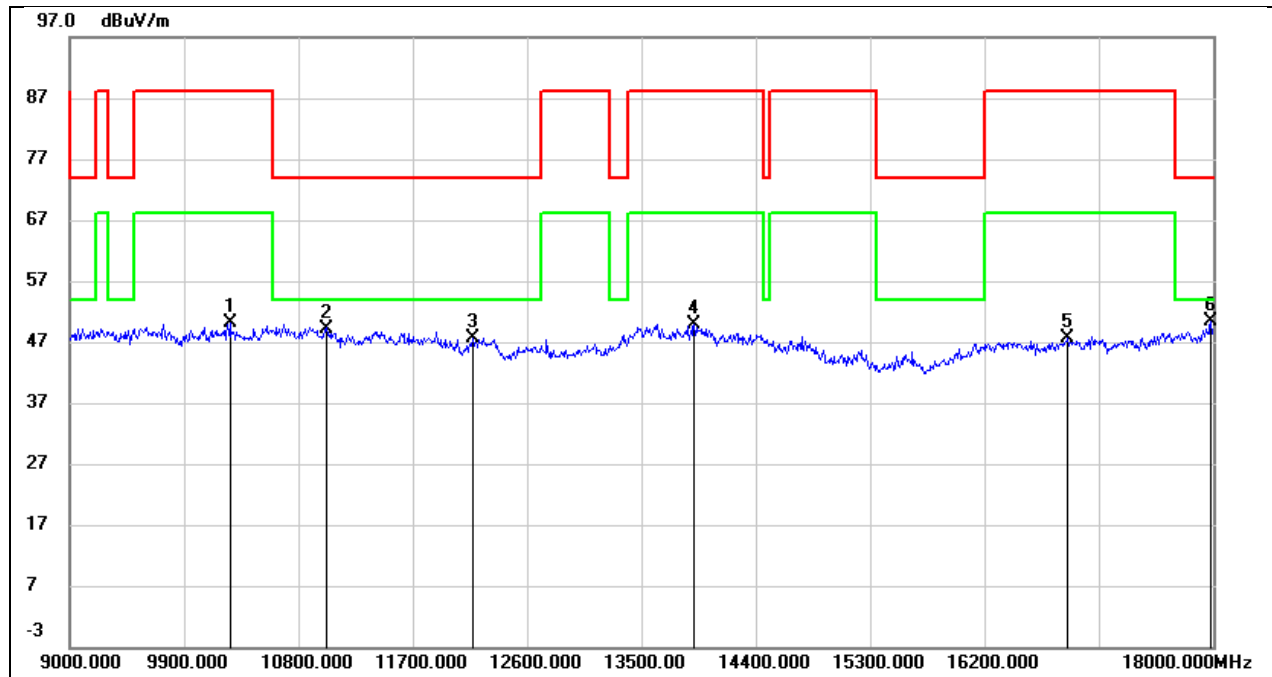


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 10260.000       | 36.50          | 13.72          | 50.22           | 88.20          | -37.98      | peak   |
| 2   | 11025.000       | 33.45          | 15.57          | 49.02           | 74.00          | -24.98      | peak   |
| 3   | 12177.000       | 28.92          | 18.74          | 47.66           | 74.00          | -26.34      | peak   |
| 4   | 13914.000       | 26.81          | 23.02          | 49.83           | 88.20          | -38.37      | peak   |
| 5   | 16857.000       | 24.98          | 22.73          | 47.71           | 88.20          | -40.49      | peak   |
| 6   | 17982.000       | 21.33          | 29.03          | 50.36           | 74.00          | -23.64      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6505      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

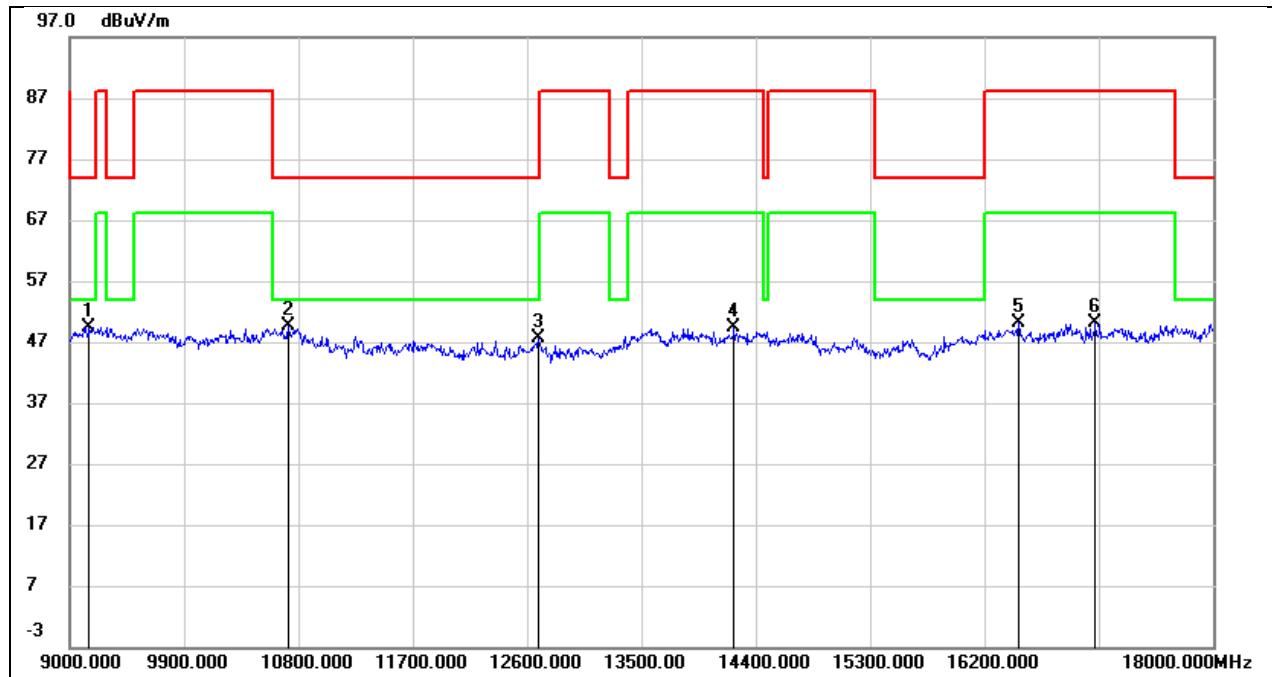


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9153.000        | 37.89          | 11.56          | 49.45           | 74.00          | -24.55      | peak   |
| 2   | 10719.000       | 35.42          | 14.32          | 49.74           | 74.00          | -24.26      | peak   |
| 3   | 12690.000       | 29.59          | 18.11          | 47.70           | 74.00          | -26.30      | peak   |
| 4   | 14229.000       | 27.92          | 21.41          | 49.33           | 88.20          | -38.87      | peak   |
| 5   | 16470.000       | 25.73          | 24.38          | 50.11           | 88.20          | -38.09      | peak   |
| 6   | 17073.000       | 25.40          | 24.80          | 50.20           | 88.20          | -38.00      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6665      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

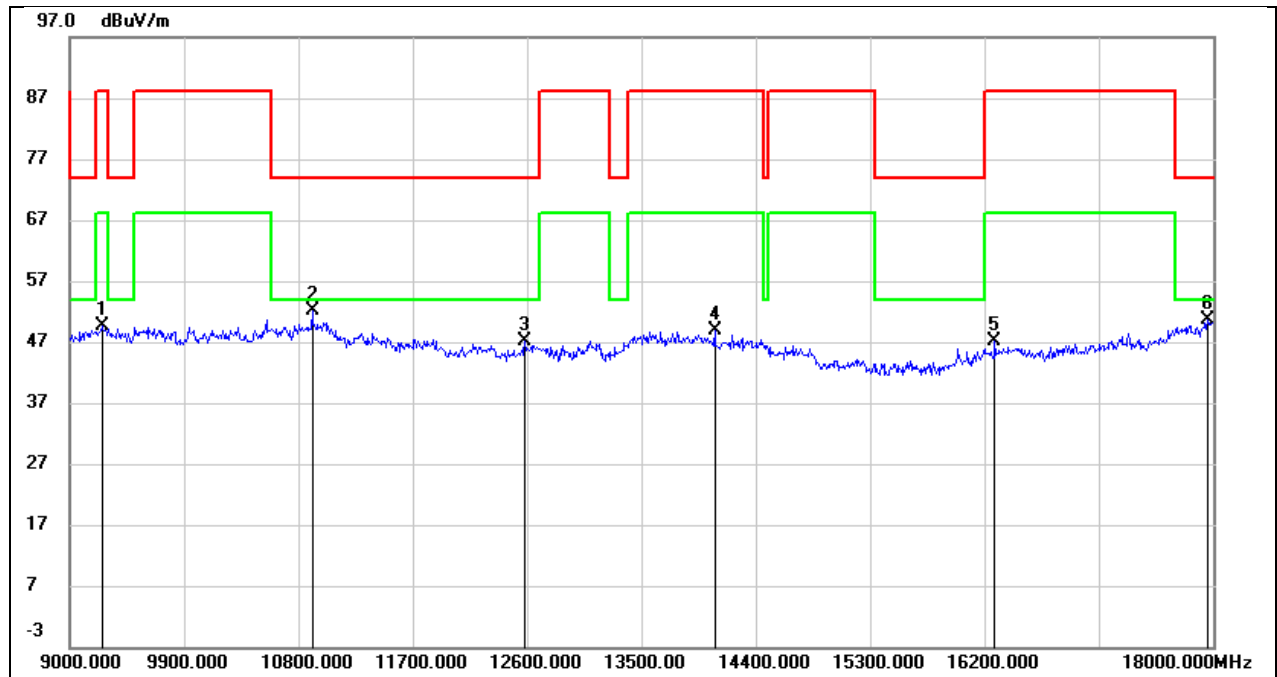


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9252.000        | 38.02          | 11.63          | 49.65           | 88.20          | -38.55      | peak   |
| 2   | 10908.000       | 36.98          | 15.23          | 52.21           | 74.00          | -21.79      | peak   |
| 3   | 12582.000       | 28.24          | 18.86          | 47.10           | 74.00          | -26.90      | peak   |
| 4   | 14076.000       | 25.81          | 22.98          | 48.79           | 88.20          | -39.41      | peak   |
| 5   | 16281.000       | 24.44          | 22.62          | 47.06           | 88.20          | -41.14      | peak   |
| 6   | 17955.000       | 21.85          | 28.77          | 50.62           | 74.00          | -23.38      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6665      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

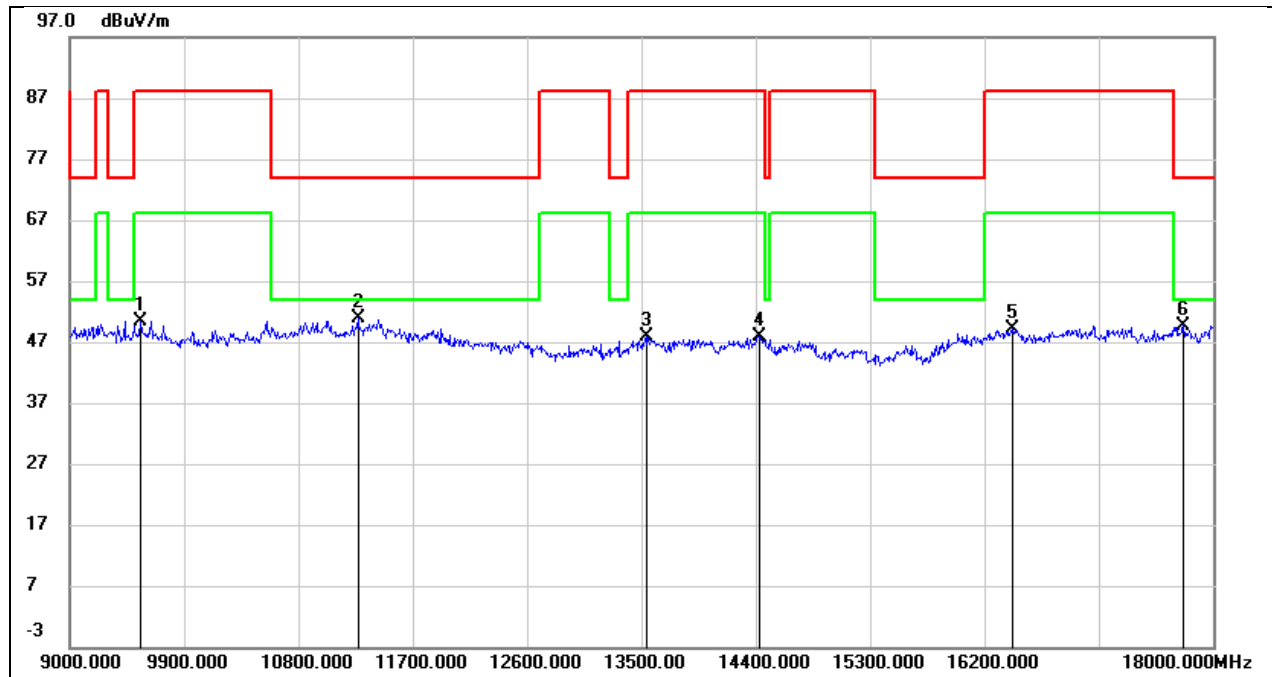


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9558.000        | 37.39          | 13.07          | 50.46           | 88.20          | -37.74      | peak   |
| 2   | 11268.000       | 35.26          | 15.59          | 50.85           | 74.00          | -23.15      | peak   |
| 3   | 13536.000       | 27.17          | 20.61          | 47.78           | 88.20          | -40.42      | peak   |
| 4   | 14427.000       | 26.68          | 21.09          | 47.77           | 88.20          | -40.43      | peak   |
| 5   | 16425.000       | 24.61          | 24.44          | 49.05           | 88.20          | -39.15      | peak   |
| 6   | 17766.000       | 23.90          | 25.85          | 49.75           | 74.00          | -24.25      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6825      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

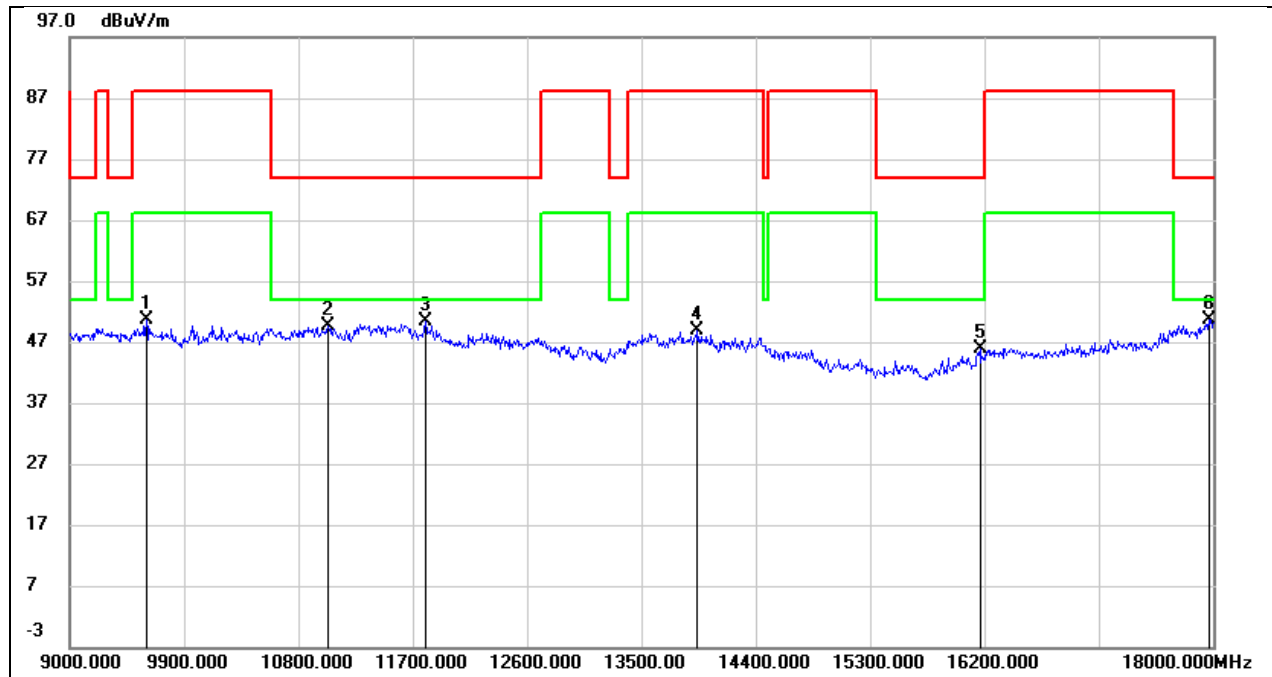


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9603.000        | 37.19          | 13.38          | 50.57           | 88.20          | -37.63      | peak   |
| 2   | 11034.000       | 34.05          | 15.60          | 49.65           | 74.00          | -24.35      | peak   |
| 3   | 11799.000       | 31.82          | 18.54          | 50.36           | 74.00          | -23.64      | peak   |
| 4   | 13941.000       | 25.79          | 23.09          | 48.88           | 88.20          | -39.32      | peak   |
| 5   | 16164.000       | 23.77          | 22.21          | 45.98           | 74.00          | -28.02      | peak   |
| 6   | 17964.000       | 21.80          | 28.86          | 50.66           | 74.00          | -23.34      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6825      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

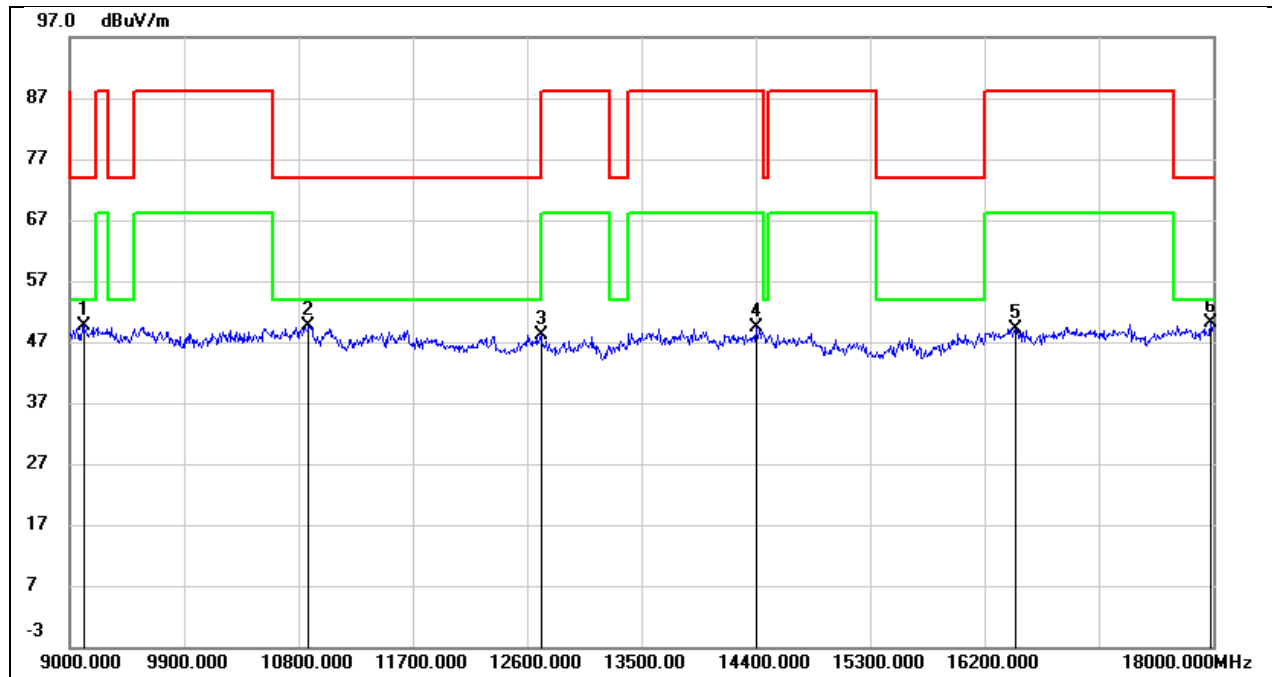


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9108.000        | 38.19          | 11.46          | 49.65           | 74.00          | -24.35      | peak   |
| 2   | 10881.000       | 35.03          | 14.51          | 49.54           | 74.00          | -24.46      | peak   |
| 3   | 12708.000       | 30.10          | 18.15          | 48.25           | 88.20          | -39.95      | peak   |
| 4   | 14400.000       | 28.13          | 21.14          | 49.27           | 88.20          | -38.93      | peak   |
| 5   | 16443.000       | 24.68          | 24.42          | 49.10           | 88.20          | -39.10      | peak   |
| 6   | 17982.000       | 23.20          | 26.91          | 50.11           | 74.00          | -23.89      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6985      |
| Polarity:  | Horizontal     | Test Voltage:   | DC 3.635V |

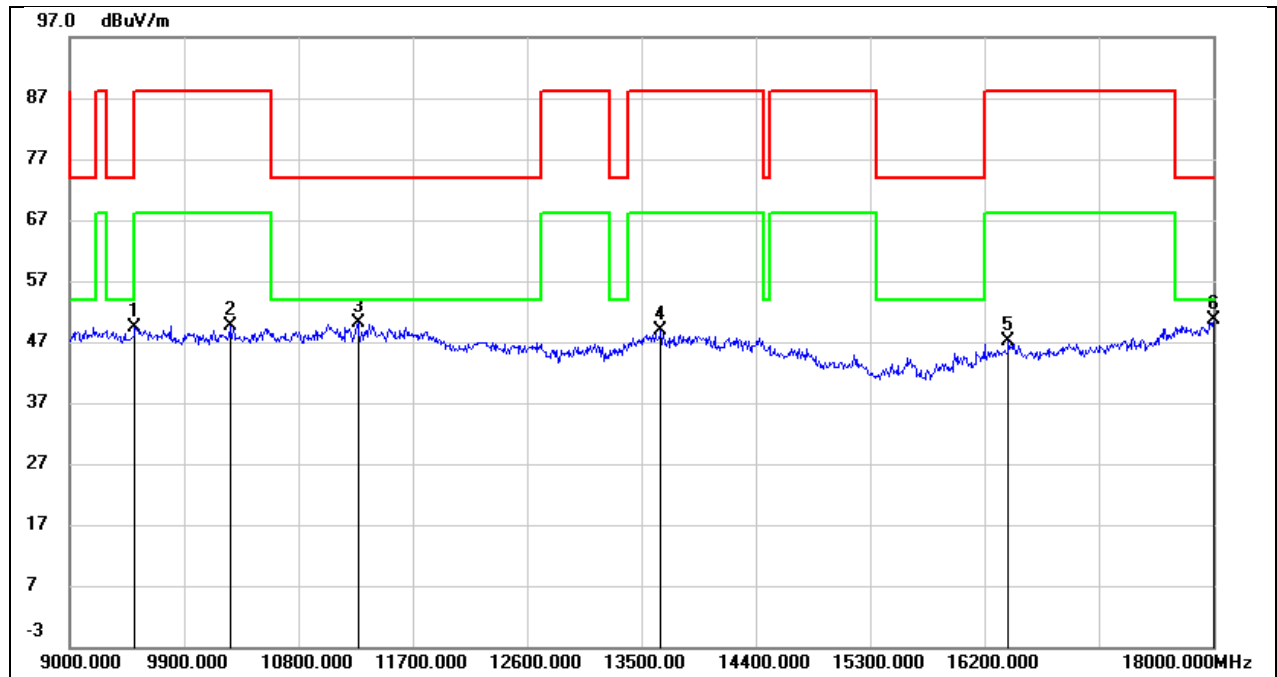

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9513.000        | 36.48          | 12.89          | 49.37           | 88.20          | -38.83      | peak   |
| 2   | 10260.000       | 36.02          | 13.72          | 49.74           | 88.20          | -38.46      | peak   |
| 3   | 11268.000       | 33.37          | 16.77          | 50.14           | 74.00          | -23.86      | peak   |
| 4   | 13653.000       | 26.48          | 22.50          | 48.98           | 88.20          | -39.22      | peak   |
| 5   | 16389.000       | 24.51          | 22.64          | 47.15           | 88.20          | -41.05      | peak   |
| 6   | 18000.000       | 21.31          | 29.20          | 50.51           | 74.00          | -23.49      | peak   |

|            |                |                 |           |
|------------|----------------|-----------------|-----------|
| Test Mode: | 802.11ax HE160 | Frequency(MHz): | 6985      |
| Polarity:  | Vertical       | Test Voltage:   | DC 3.635V |

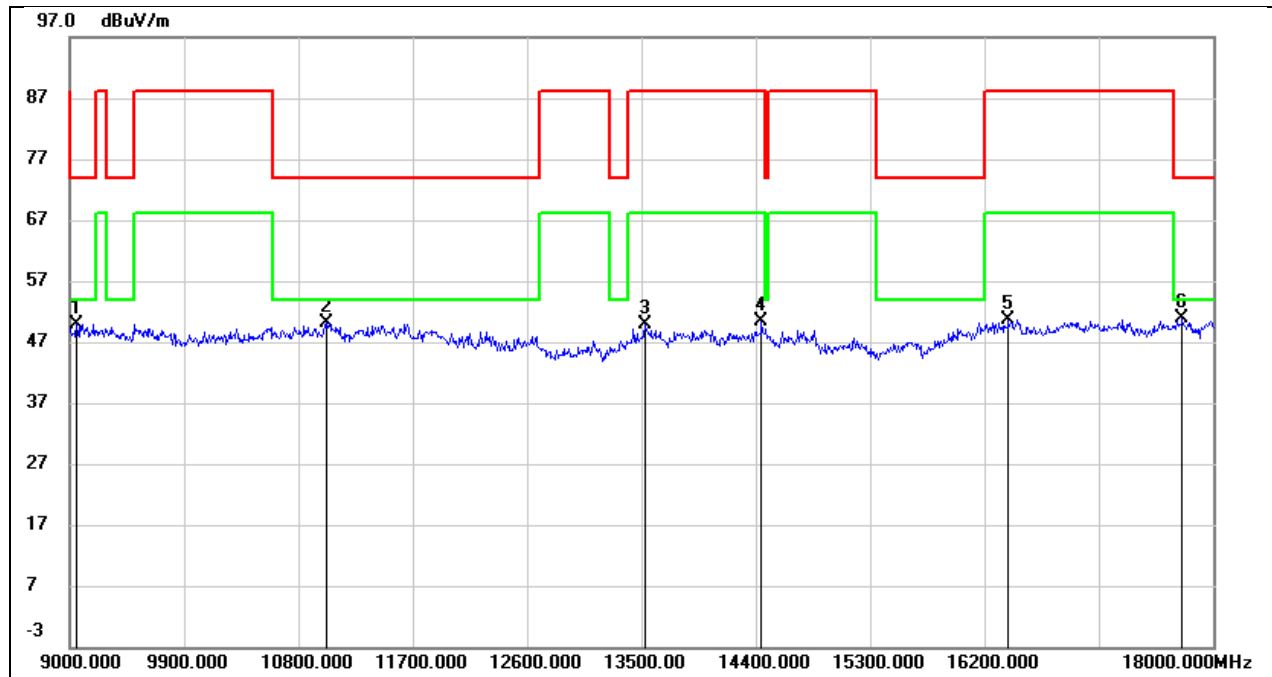


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9054.000        | 38.64          | 11.32          | 49.96           | 74.00          | -24.04      | peak   |
| 2   | 11025.000       | 35.36          | 14.74          | 50.10           | 74.00          | -23.90      | peak   |
| 3   | 13527.000       | 29.16          | 20.60          | 49.76           | 88.20          | -38.44      | peak   |
| 4   | 14445.000       | 29.23          | 21.05          | 50.28           | 88.20          | -37.92      | peak   |
| 5   | 16389.000       | 26.10          | 24.49          | 50.59           | 88.20          | -37.61      | peak   |
| 6   | 17757.000       | 25.05          | 25.81          | 50.86           | 74.00          | -23.14      | peak   |

Note: Indoor Client and Standard Power Client have been tested, only the worst data of Indoor Client-UNII-6/-8 and Standard Power Client-UNII-5/-7 were recorded in the report.


## 8.5. SPURIOUS EMISSIONS(9 GHZ~18 GHZ) PARTIAL RU

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

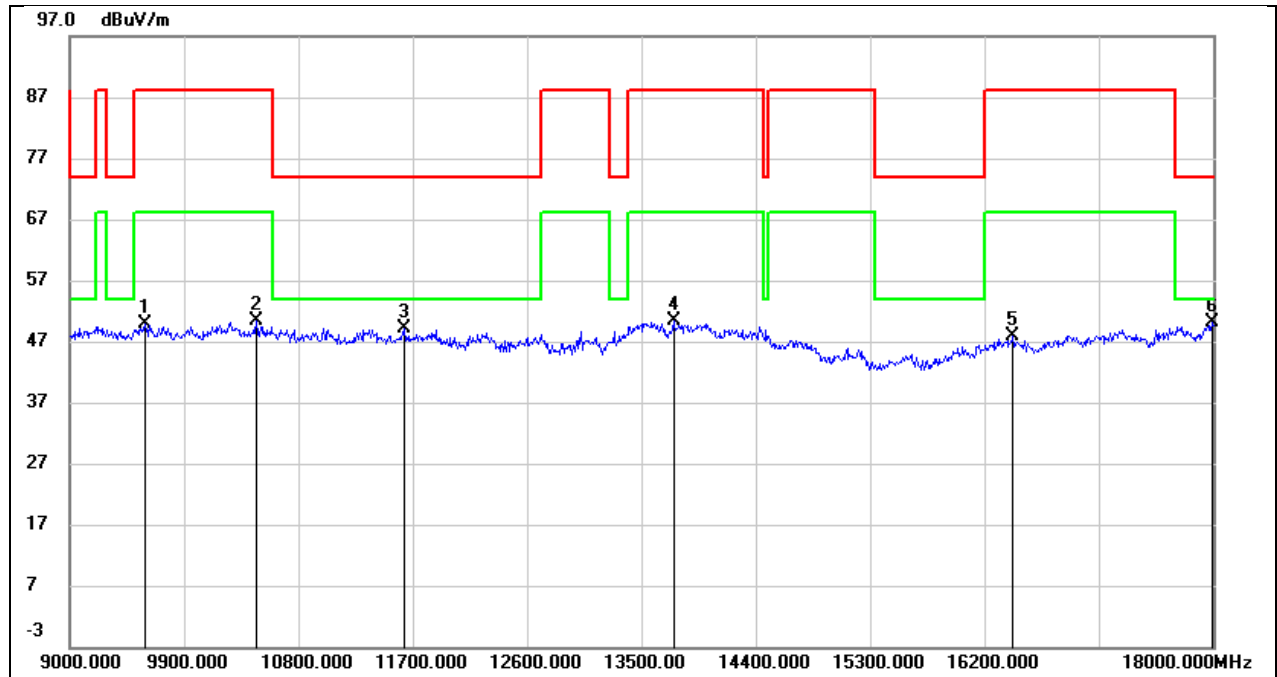


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9594.000        | 36.61          | 13.16          | 49.77           | 88.20          | -38.43      | peak   |
| 2   | 10467.000       | 35.79          | 14.50          | 50.29           | 88.20          | -37.91      | peak   |
| 3   | 11628.000       | 30.69          | 18.35          | 49.04           | 74.00          | -24.96      | peak   |
| 4   | 13752.000       | 27.36          | 23.01          | 50.37           | 88.20          | -37.83      | peak   |
| 5   | 16425.000       | 25.92          | 21.93          | 47.85           | 88.20          | -40.35      | peak   |
| 6   | 17991.000       | 22.16          | 28.02          | 50.18           | 74.00          | -23.82      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

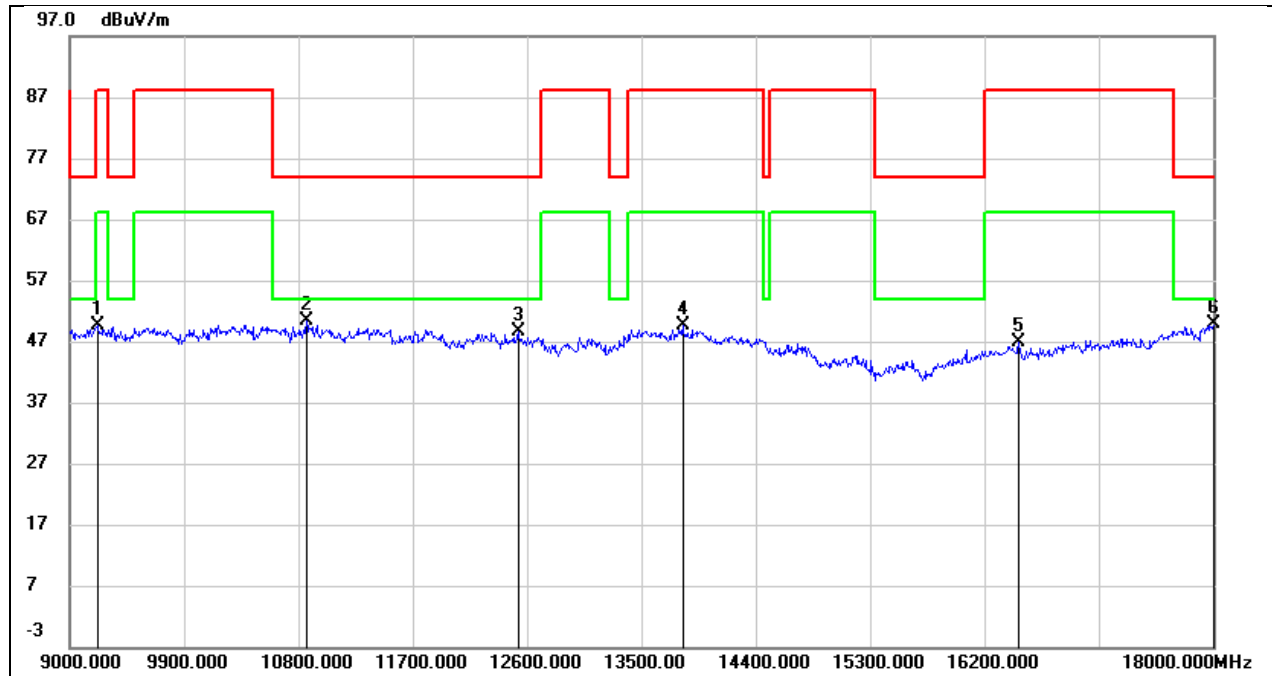


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9216.000           | 38.36             | 11.35             | 49.71              | 88.20             | -38.49         | peak   |
| 2   | 10863.000          | 34.76             | 15.55             | 50.31              | 74.00             | -23.69         | peak   |
| 3   | 12528.000          | 29.13             | 19.61             | 48.74              | 74.00             | -25.26         | peak   |
| 4   | 13824.000          | 26.45             | 23.14             | 49.59              | 88.20             | -38.61         | peak   |
| 5   | 16470.000          | 25.03             | 21.88             | 46.91              | 88.20             | -41.29         | peak   |
| 6   | 18000.000          | 21.73             | 28.10             | 49.83              | 74.00             | -24.17         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 6175      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

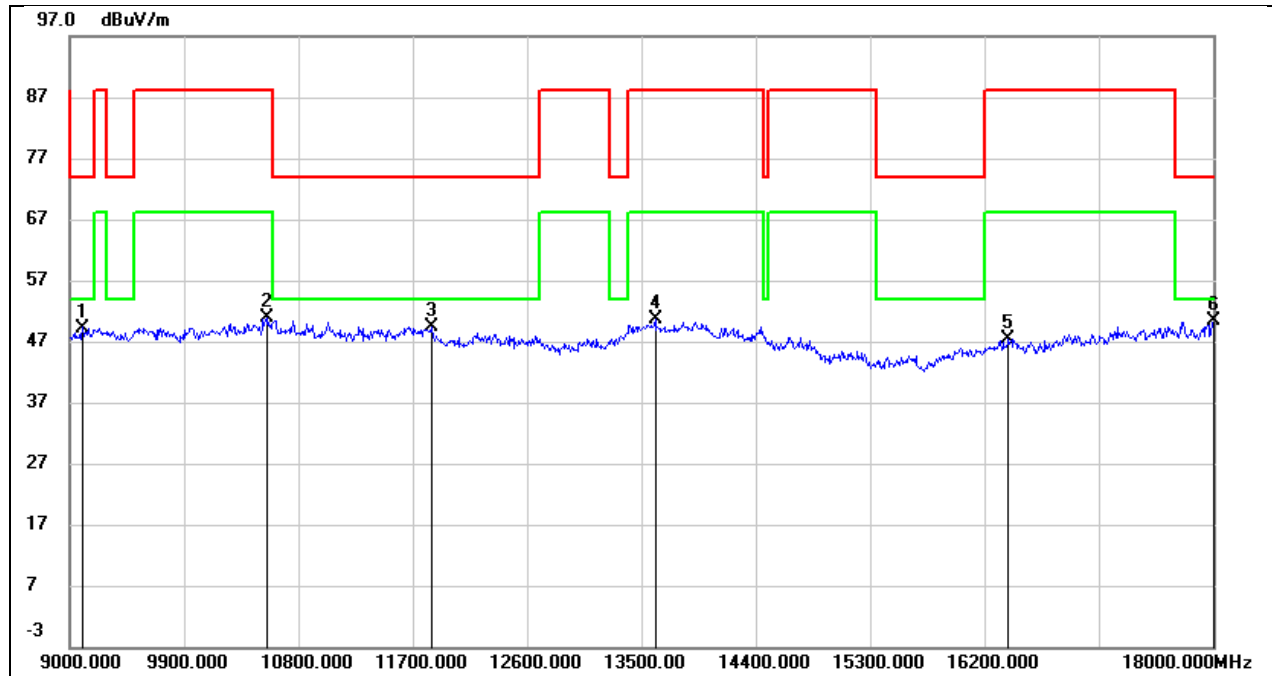


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9099.000           | 38.26             | 10.99             | 49.25              | 74.00             | -24.75         | peak   |
| 2   | 10557.000          | 36.03             | 14.83             | 50.86              | 88.20             | -37.34         | peak   |
| 3   | 11844.000          | 30.93             | 18.56             | 49.49              | 74.00             | -24.51         | peak   |
| 4   | 13608.000          | 27.83             | 22.81             | 50.64              | 88.20             | -37.56         | peak   |
| 5   | 16389.000          | 25.35             | 21.97             | 47.32              | 88.20             | -40.88         | peak   |
| 6   | 18000.000          | 22.30             | 28.10             | 50.40              | 74.00             | -23.60         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 6175      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

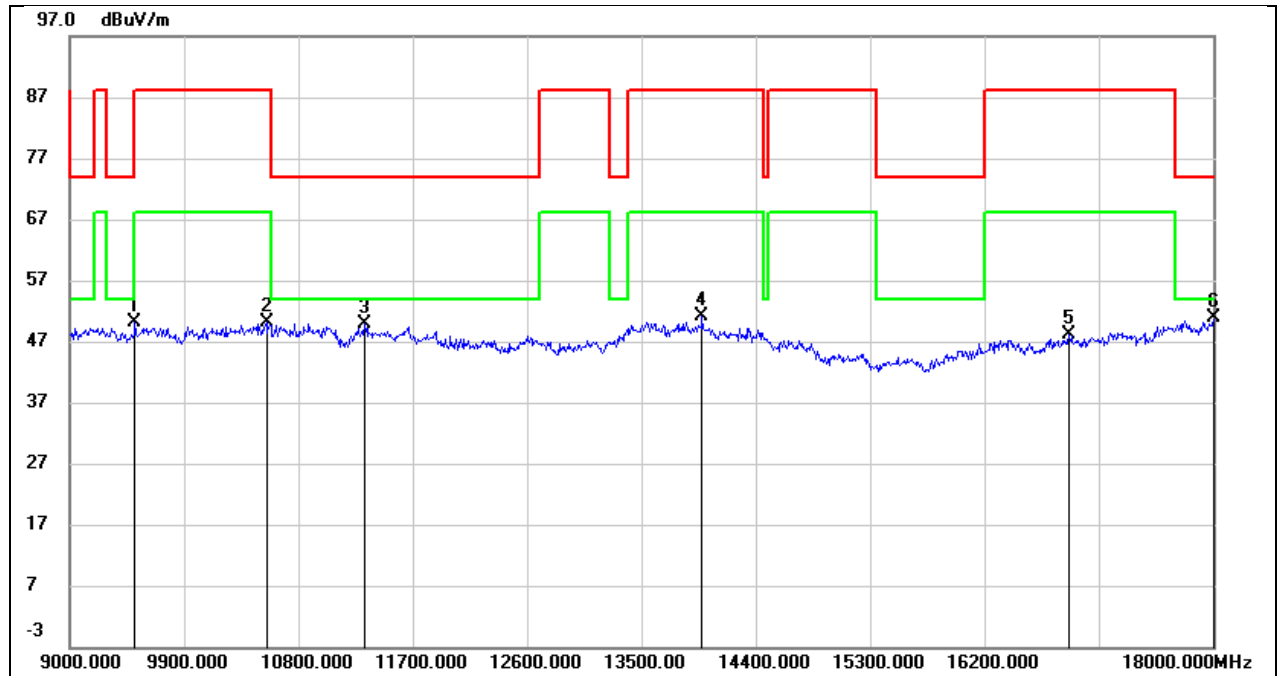


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9513.000        | 37.43          | 12.70          | 50.13           | 88.20          | -38.07      | peak   |
| 2   | 10548.000       | 35.41          | 14.80          | 50.21           | 88.20          | -37.99      | peak   |
| 3   | 11322.000       | 32.91          | 17.01          | 49.92           | 74.00          | -24.08      | peak   |
| 4   | 13977.000       | 27.60          | 23.48          | 51.08           | 88.20          | -37.12      | peak   |
| 5   | 16866.000       | 25.55          | 22.53          | 48.08           | 88.20          | -40.12      | peak   |
| 6   | 18000.000       | 22.78          | 28.10          | 50.88           | 74.00          | -23.12      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 6415      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

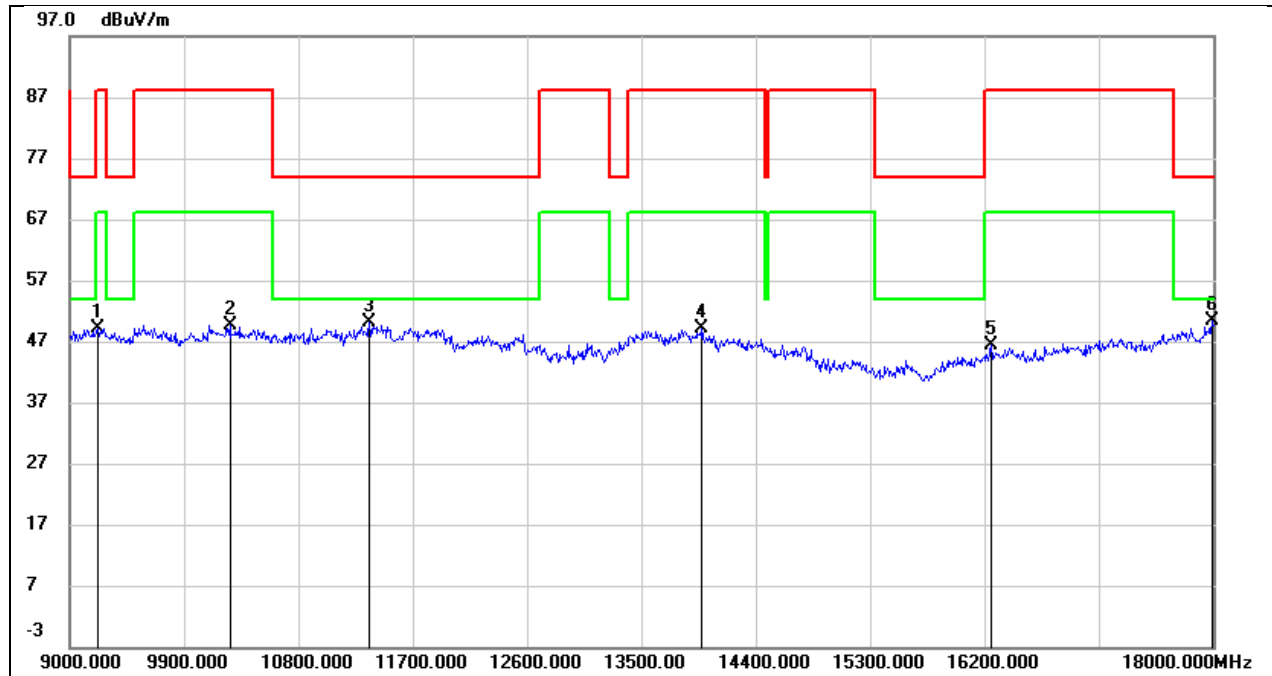


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9225.000        | 37.84          | 11.38          | 49.22           | 88.20          | -38.98      | peak   |
| 2   | 10260.000       | 35.79          | 13.93          | 49.72           | 88.20          | -38.48      | peak   |
| 3   | 11358.000       | 32.97          | 17.15          | 50.12           | 74.00          | -23.88      | peak   |
| 4   | 13977.000       | 25.73          | 23.48          | 49.21           | 88.20          | -38.99      | peak   |
| 5   | 16254.000       | 24.20          | 22.11          | 46.31           | 88.20          | -41.89      | peak   |
| 6   | 17991.000       | 22.24          | 28.02          | 50.26           | 74.00          | -23.74      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 6415      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

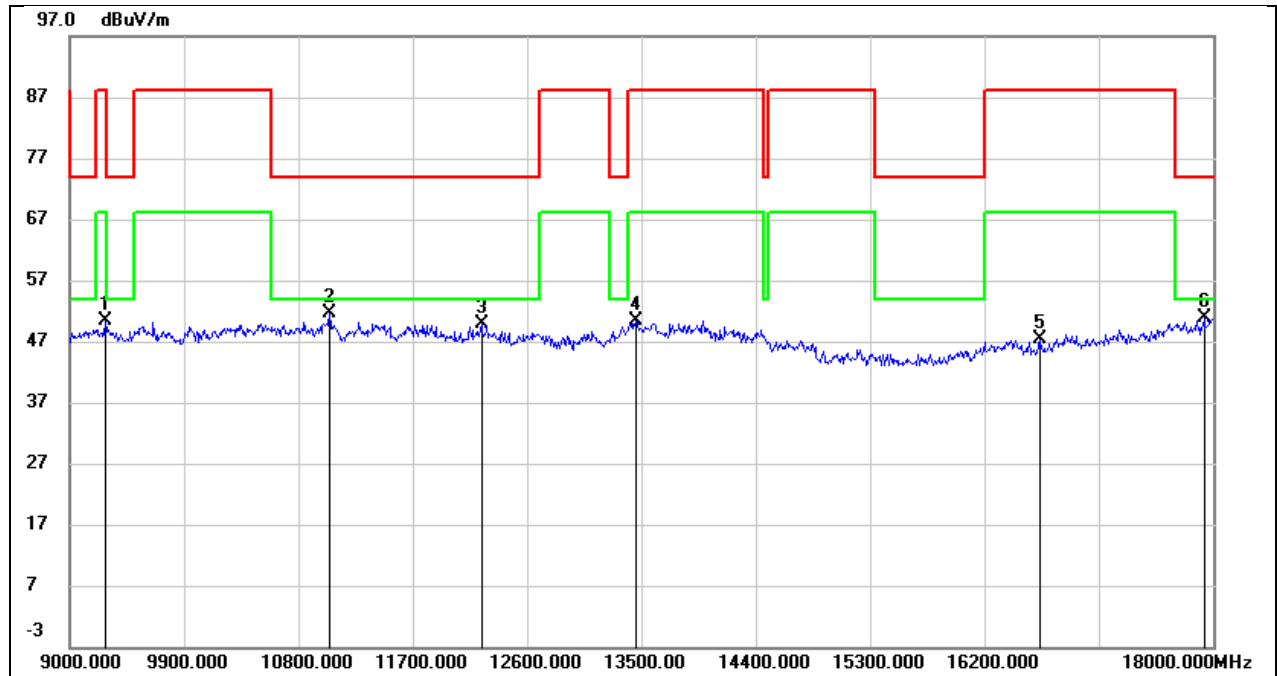


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9279.000           | 38.75             | 11.58             | 50.33              | 88.20             | -37.87         | peak   |
| 2   | 11043.000          | 35.54             | 15.99             | 51.53              | 74.00             | -22.47         | peak   |
| 3   | 12240.000          | 30.78             | 19.20             | 49.98              | 74.00             | -24.02         | peak   |
| 4   | 13455.000          | 28.03             | 22.46             | 50.49              | 88.20             | -37.71         | peak   |
| 5   | 16632.000          | 25.57             | 21.92             | 47.49              | 88.20             | -40.71         | peak   |
| 6   | 17928.000          | 23.43             | 27.51             | 50.94              | 74.00             | -23.06         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 6435      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

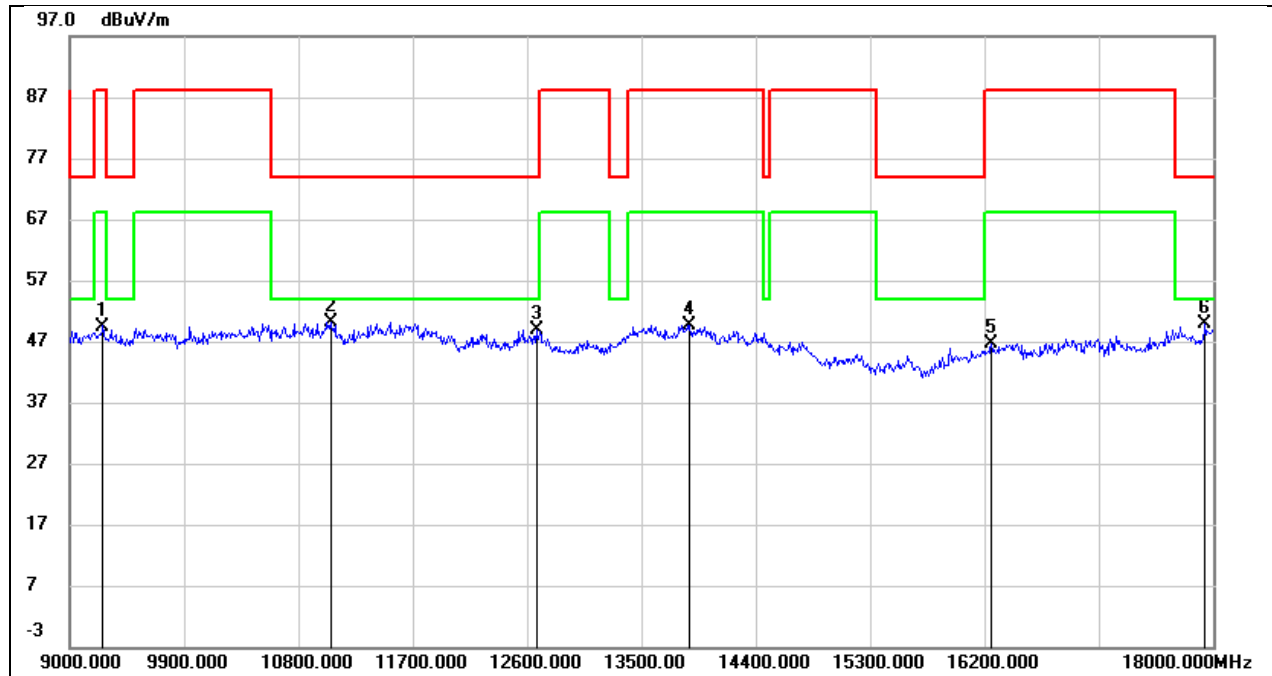


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9261.000        | 37.98          | 11.52          | 49.50           | 88.20          | -38.70      | peak   |
| 2   | 11052.000       | 34.15          | 16.02          | 50.17           | 74.00          | -23.83      | peak   |
| 3   | 12672.000       | 29.26          | 19.73          | 48.99           | 74.00          | -25.01      | peak   |
| 4   | 13878.000       | 26.49          | 23.25          | 49.74           | 88.20          | -38.46      | peak   |
| 5   | 16254.000       | 24.58          | 22.11          | 46.69           | 88.20          | -41.51      | peak   |
| 6   | 17937.000       | 22.29          | 27.59          | 49.88           | 74.00          | -24.12      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 6435      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

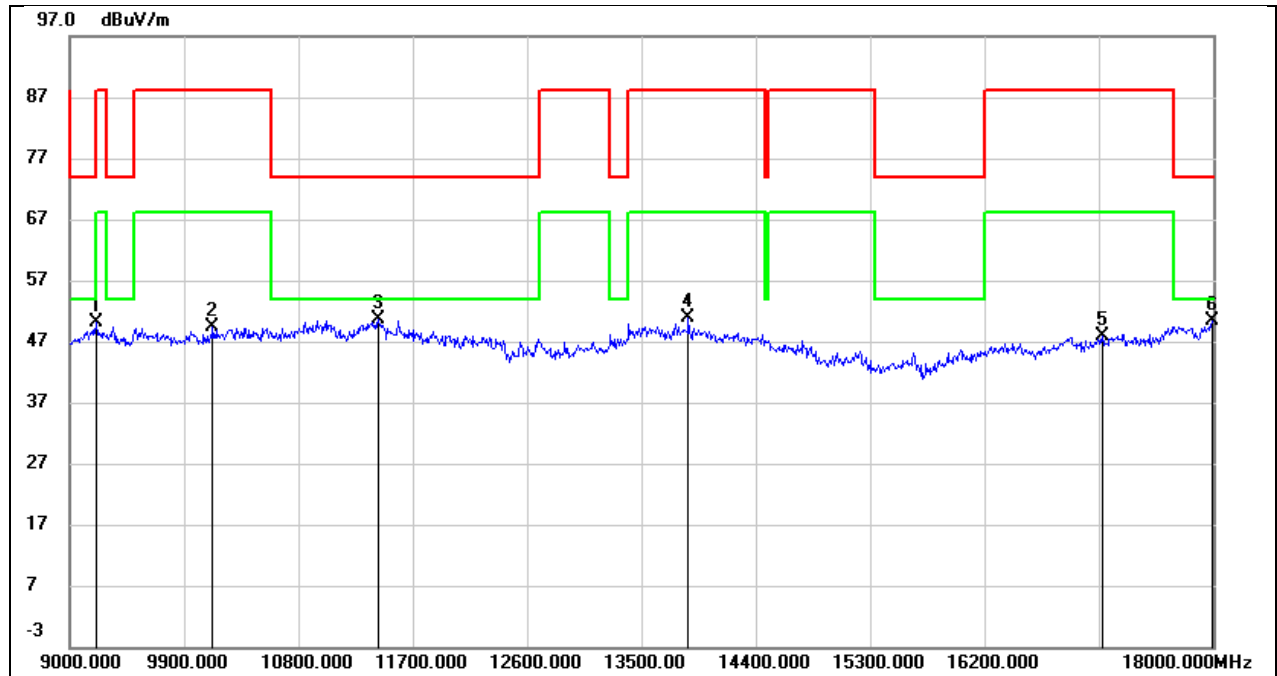


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9207.000        | 38.74          | 11.33          | 50.07           | 88.20          | -38.13      | peak   |
| 2   | 10125.000       | 35.61          | 13.74          | 49.35           | 88.20          | -38.85      | peak   |
| 3   | 11430.000       | 33.07          | 17.45          | 50.52           | 74.00          | -23.48      | peak   |
| 4   | 13869.000       | 27.55          | 23.24          | 50.79           | 88.20          | -37.41      | peak   |
| 5   | 17127.000       | 24.49          | 23.44          | 47.93           | 88.20          | -40.27      | peak   |
| 6   | 17991.000       | 22.38          | 28.02          | 50.40           | 74.00          | -23.60      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 6475      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

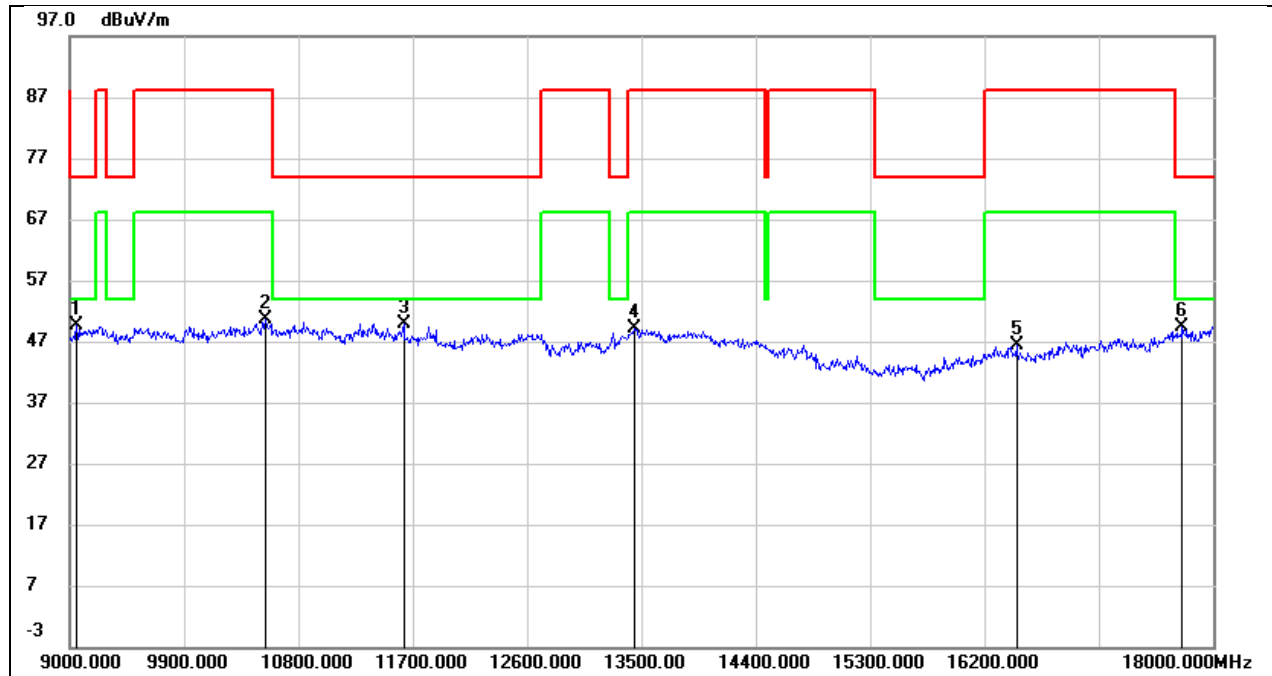


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9054.000           | 38.65             | 10.86             | 49.51              | 74.00             | -24.49         | peak   |
| 2   | 10539.000          | 35.78             | 14.76             | 50.54              | 88.20             | -37.66         | peak   |
| 3   | 11628.000          | 31.55             | 18.35             | 49.90              | 74.00             | -24.10         | peak   |
| 4   | 13446.000          | 26.63             | 22.42             | 49.05              | 88.20             | -39.15         | peak   |
| 5   | 16452.000          | 24.51             | 21.90             | 46.41              | 88.20             | -41.79         | peak   |
| 6   | 17757.000          | 23.26             | 26.18             | 49.44              | 74.00             | -24.56         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 6475      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

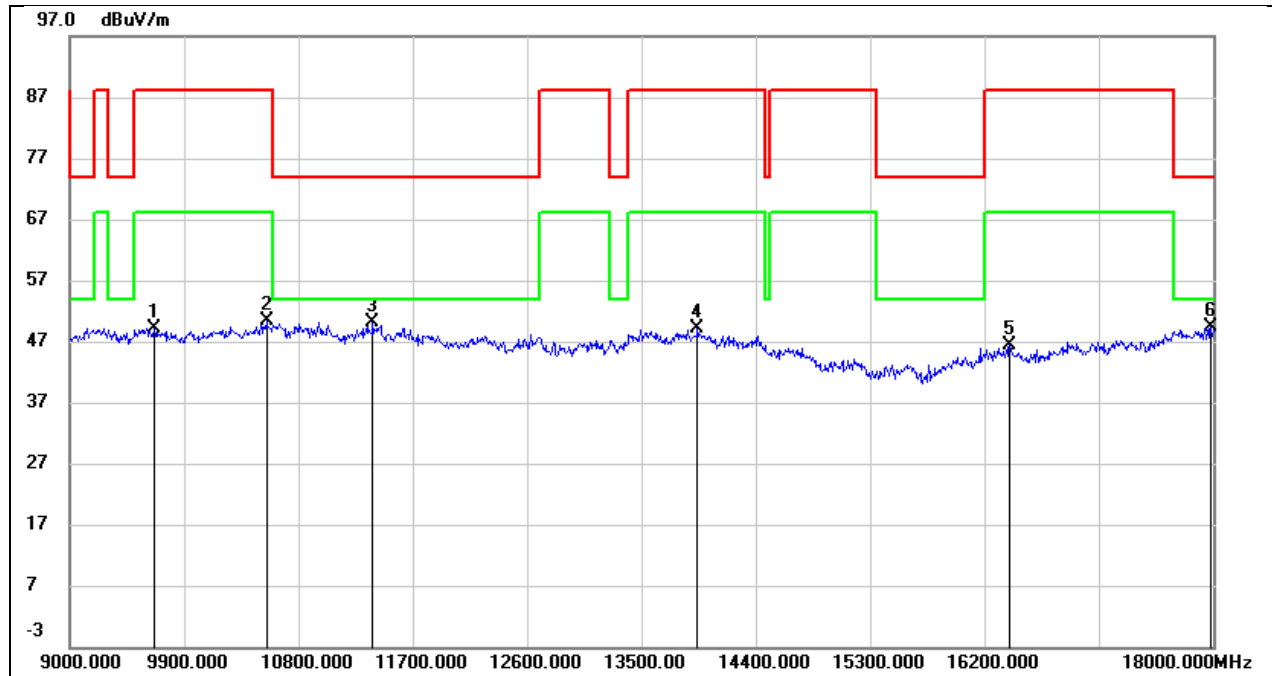


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9666.000           | 35.83             | 13.39             | 49.22              | 88.20             | -38.98         | peak   |
| 2   | 10548.000          | 35.53             | 14.80             | 50.33              | 88.20             | -37.87         | peak   |
| 3   | 11385.000          | 32.83             | 17.26             | 50.09              | 74.00             | -23.91         | peak   |
| 4   | 13941.000          | 25.79             | 23.40             | 49.19              | 88.20             | -39.01         | peak   |
| 5   | 16398.000          | 24.32             | 21.96             | 46.28              | 88.20             | -41.92         | peak   |
| 6   | 17982.000          | 21.32             | 27.96             | 49.28              | 74.00             | -24.72         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 6515      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

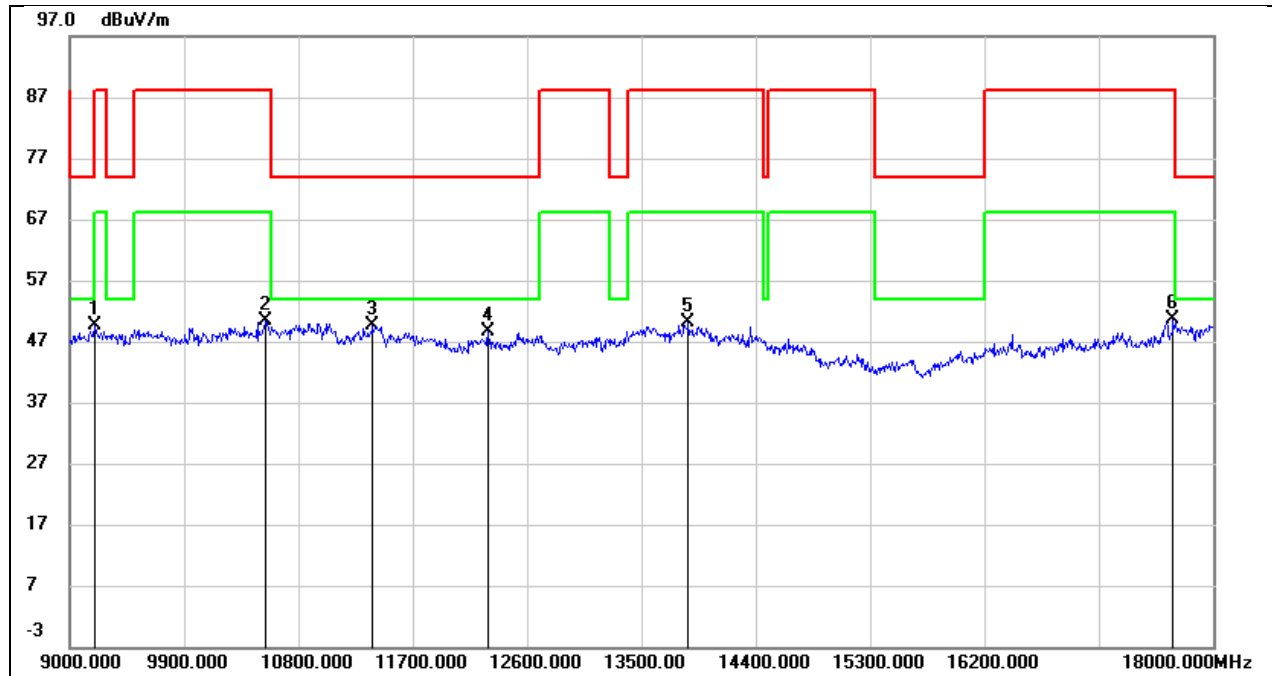


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9198.000           | 38.36             | 11.30             | 49.66              | 74.00             | -24.34         | peak   |
| 2   | 10539.000          | 35.50             | 14.76             | 50.26              | 88.20             | -37.94         | peak   |
| 3   | 11385.000          | 32.32             | 17.26             | 49.58              | 74.00             | -24.42         | peak   |
| 4   | 12294.000          | 29.37             | 19.31             | 48.68              | 74.00             | -25.32         | peak   |
| 5   | 13869.000          | 26.77             | 23.24             | 50.01              | 88.20             | -38.19         | peak   |
| 6   | 17685.000          | 25.04             | 25.68             | 50.72              | 88.20             | -37.48         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 6515      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

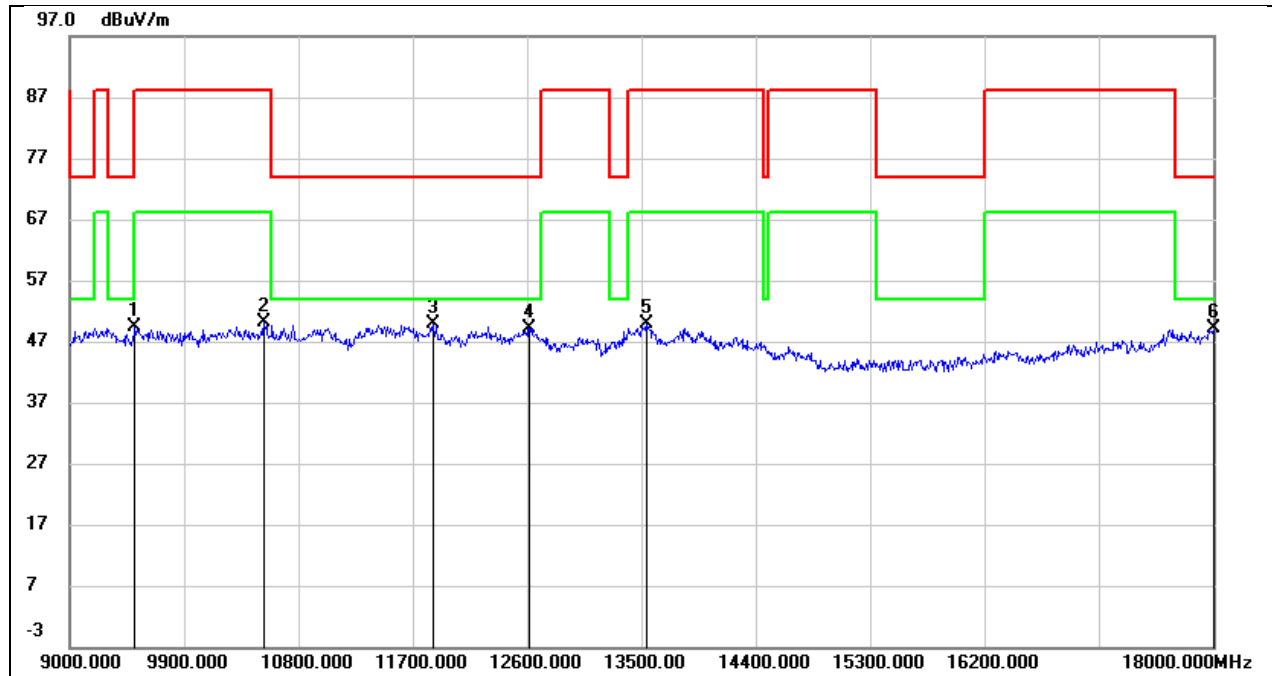


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9513.000           | 36.65             | 12.70             | 49.35              | 88.20             | -38.85         | peak   |
| 2   | 10530.000          | 35.27             | 14.74             | 50.01              | 88.20             | -38.19         | peak   |
| 3   | 11862.000          | 31.20             | 18.61             | 49.81              | 74.00             | -24.19         | peak   |
| 4   | 12618.000          | 29.44             | 19.63             | 49.07              | 74.00             | -24.93         | peak   |
| 5   | 13536.000          | 27.12             | 22.69             | 49.81              | 88.20             | -38.39         | peak   |
| 6   | 18000.000          | 21.01             | 28.10             | 49.11              | 74.00             | -24.89         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 6535      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

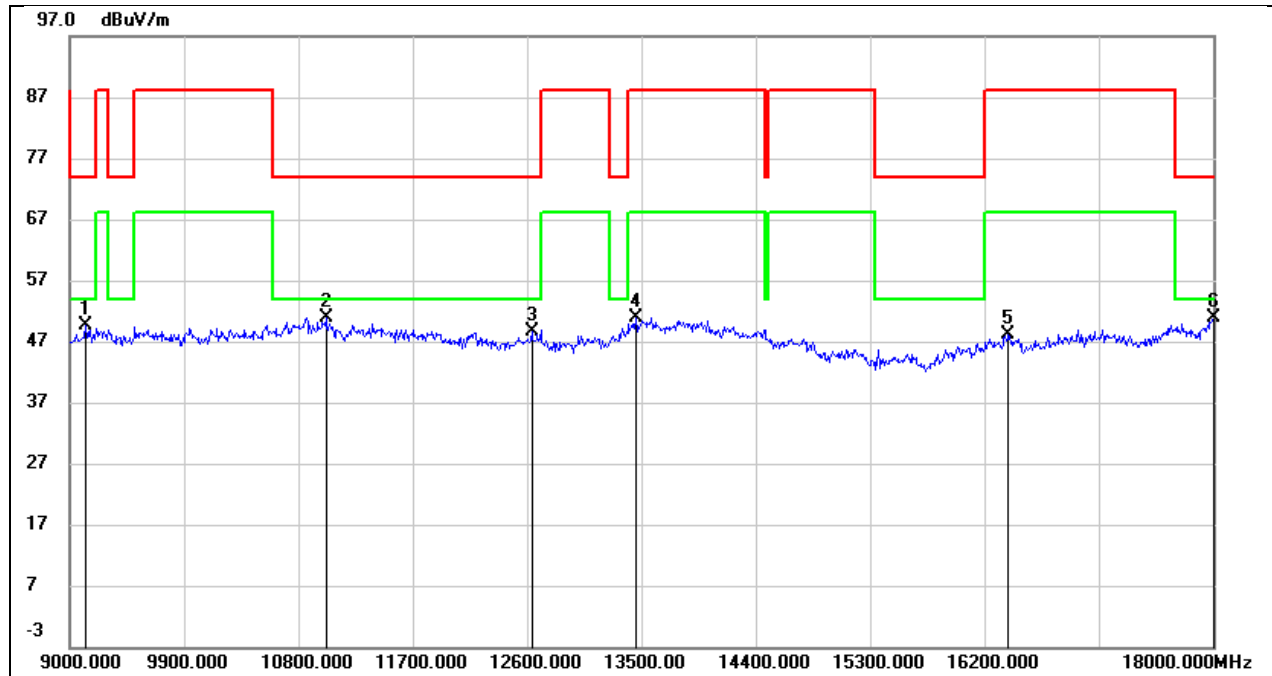


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9126.000        | 38.46          | 11.07          | 49.53           | 74.00          | -24.47      | peak   |
| 2   | 11016.000       | 34.99          | 15.91          | 50.90           | 74.00          | -23.10      | peak   |
| 3   | 12636.000       | 28.88          | 19.67          | 48.55           | 74.00          | -25.45      | peak   |
| 4   | 13455.000       | 28.53          | 22.46          | 50.99           | 88.20          | -37.21      | peak   |
| 5   | 16389.000       | 26.22          | 21.97          | 48.19           | 88.20          | -40.01      | peak   |
| 6   | 18000.000       | 22.67          | 28.10          | 50.77           | 74.00          | -23.23      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 6535      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

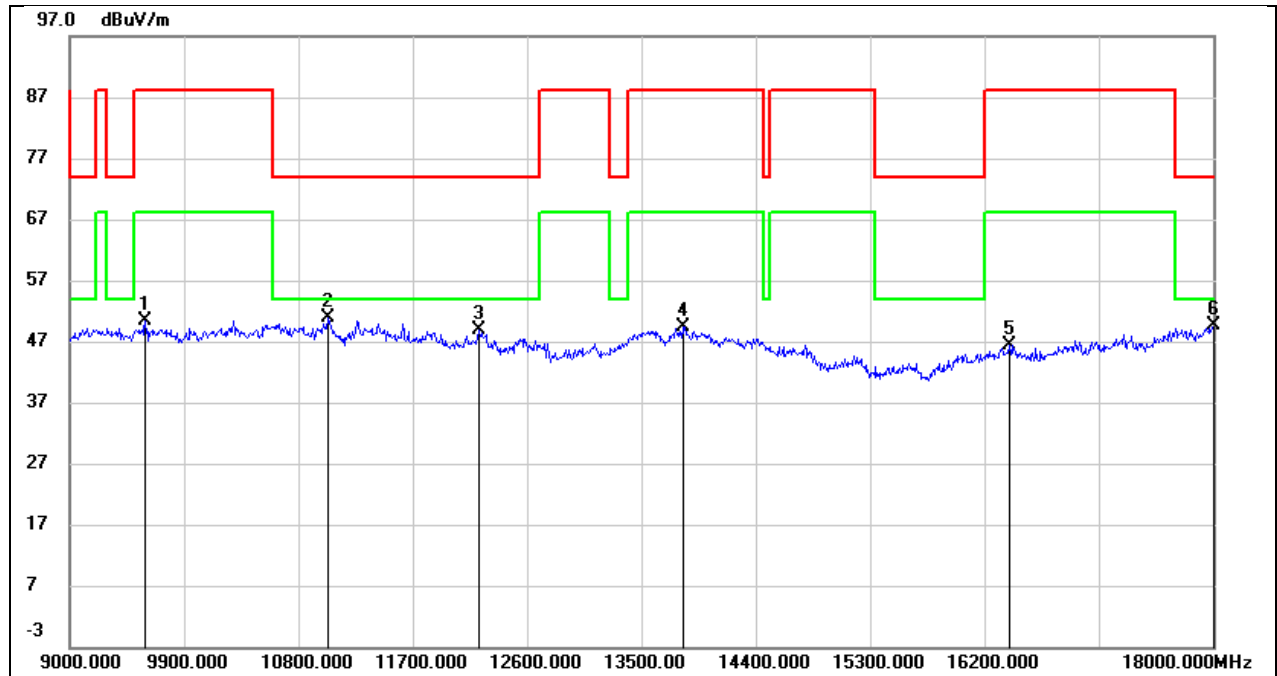


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9594.000           | 37.15             | 13.16             | 50.31              | 88.20             | -37.89         | peak   |
| 2   | 11034.000          | 34.89             | 15.96             | 50.85              | 74.00             | -23.15         | peak   |
| 3   | 12222.000          | 29.74             | 19.16             | 48.90              | 74.00             | -25.10         | peak   |
| 4   | 13824.000          | 26.12             | 23.14             | 49.26              | 88.20             | -38.94         | peak   |
| 5   | 16398.000          | 24.40             | 21.96             | 46.36              | 88.20             | -41.84         | peak   |
| 6   | 18000.000          | 21.42             | 28.10             | 49.52              | 74.00             | -24.48         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 6715      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

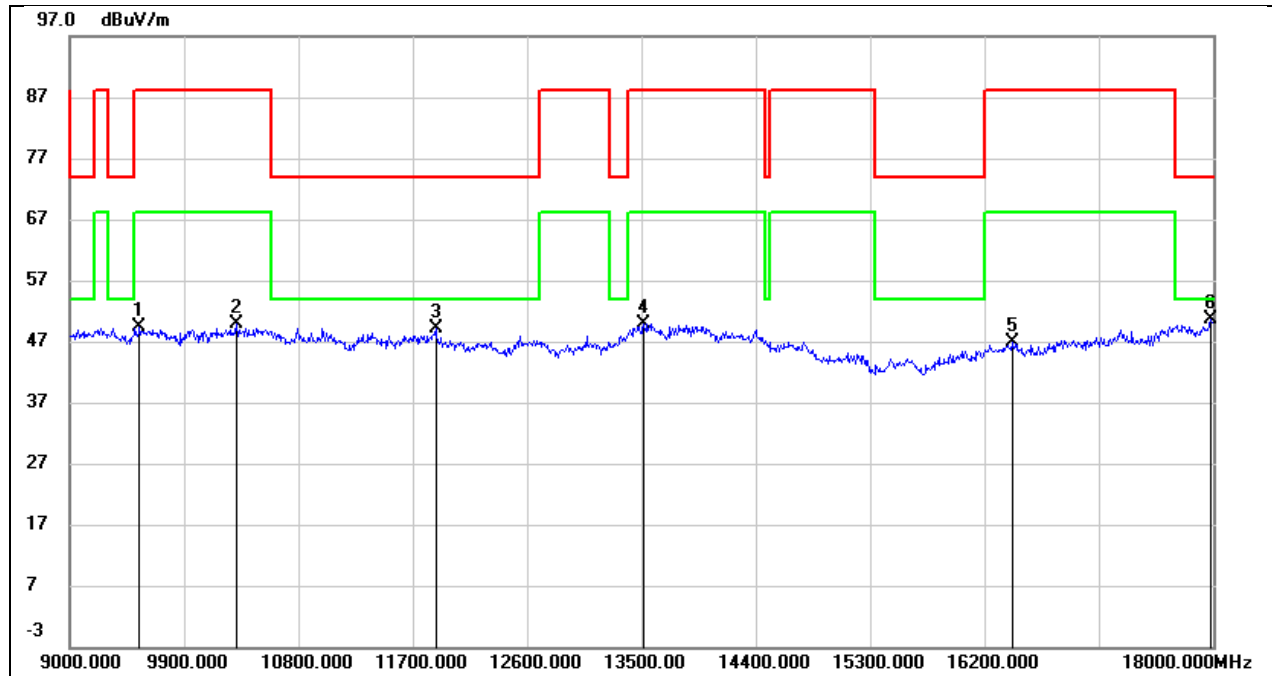


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9549.000           | 36.47             | 12.90             | 49.37              | 88.20             | -38.83         | peak   |
| 2   | 10314.000          | 35.84             | 14.06             | 49.90              | 88.20             | -38.30         | peak   |
| 3   | 11880.000          | 30.52             | 18.65             | 49.17              | 74.00             | -24.83         | peak   |
| 4   | 13518.000          | 27.22             | 22.67             | 49.89              | 88.20             | -38.31         | peak   |
| 5   | 16416.000          | 24.84             | 21.94             | 46.78              | 88.20             | -41.42         | peak   |
| 6   | 17982.000          | 22.72             | 27.96             | 50.68              | 74.00             | -23.32         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 6715      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

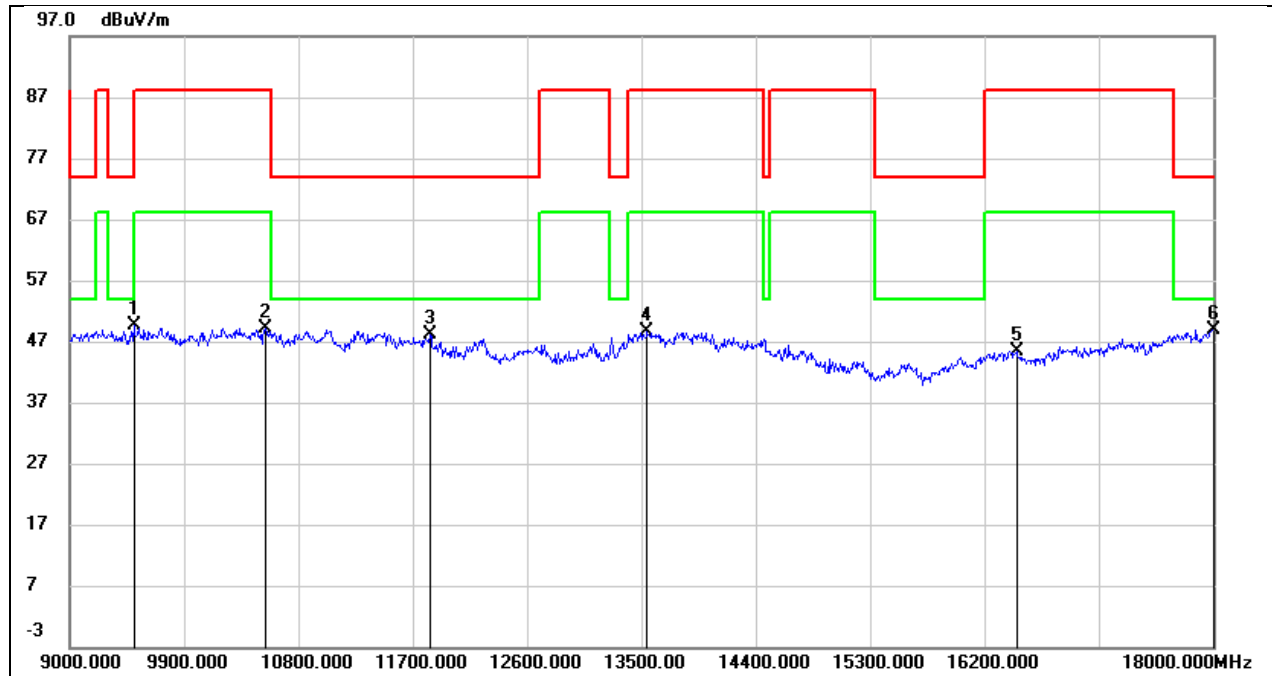


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9504.000           | 37.05             | 12.64             | 49.69              | 88.20             | -38.51         | peak   |
| 2   | 10539.000          | 34.35             | 14.76             | 49.11              | 88.20             | -39.09         | peak   |
| 3   | 11835.000          | 29.46             | 18.56             | 48.02              | 74.00             | -25.98         | peak   |
| 4   | 13545.000          | 25.85             | 22.71             | 48.56              | 88.20             | -39.64         | peak   |
| 5   | 16452.000          | 23.60             | 21.90             | 45.50              | 88.20             | -42.70         | peak   |
| 6   | 18000.000          | 20.86             | 28.10             | 48.96              | 74.00             | -25.04         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 6855      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

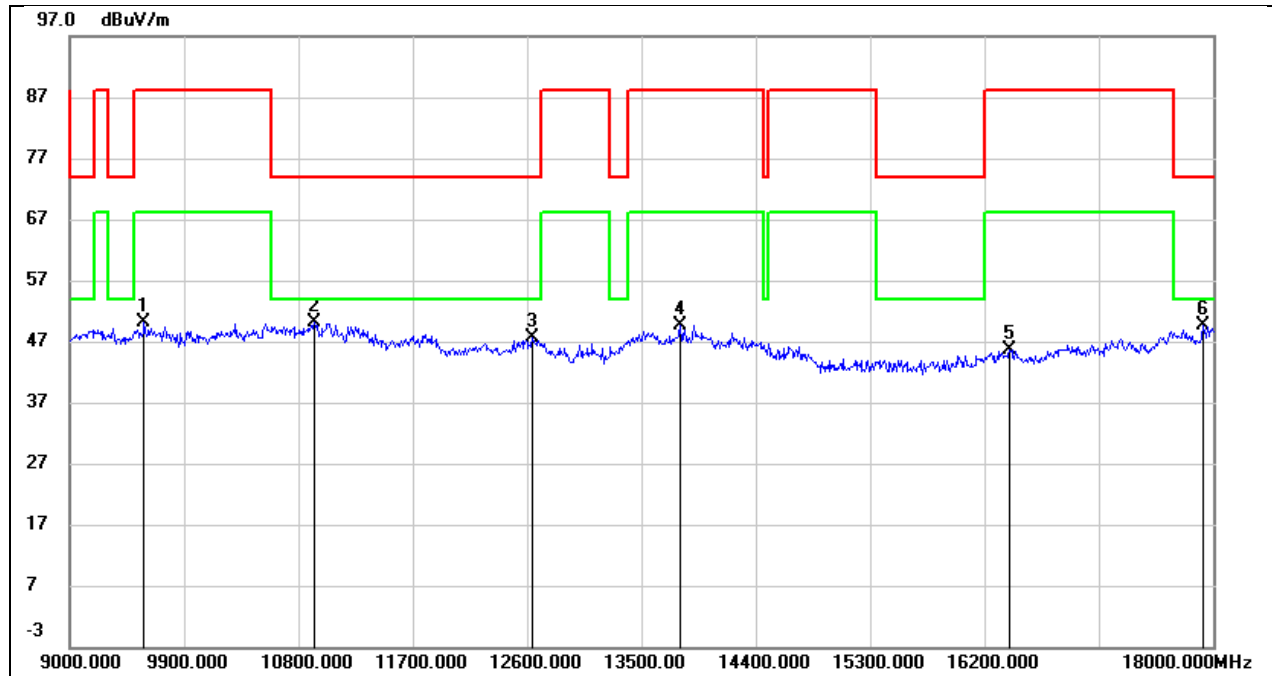


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9585.000           | 37.09             | 13.11             | 50.20              | 88.20             | -38.00         | peak   |
| 2   | 10926.000          | 34.49             | 15.69             | 50.18              | 74.00             | -23.82         | peak   |
| 3   | 12645.000          | 27.96             | 19.69             | 47.65              | 74.00             | -26.35         | peak   |
| 4   | 13806.000          | 26.47             | 23.09             | 49.56              | 88.20             | -38.64         | peak   |
| 5   | 16398.000          | 23.72             | 21.96             | 45.68              | 88.20             | -42.52         | peak   |
| 6   | 17919.000          | 22.07             | 27.44             | 49.51              | 74.00             | -24.49         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 6855      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

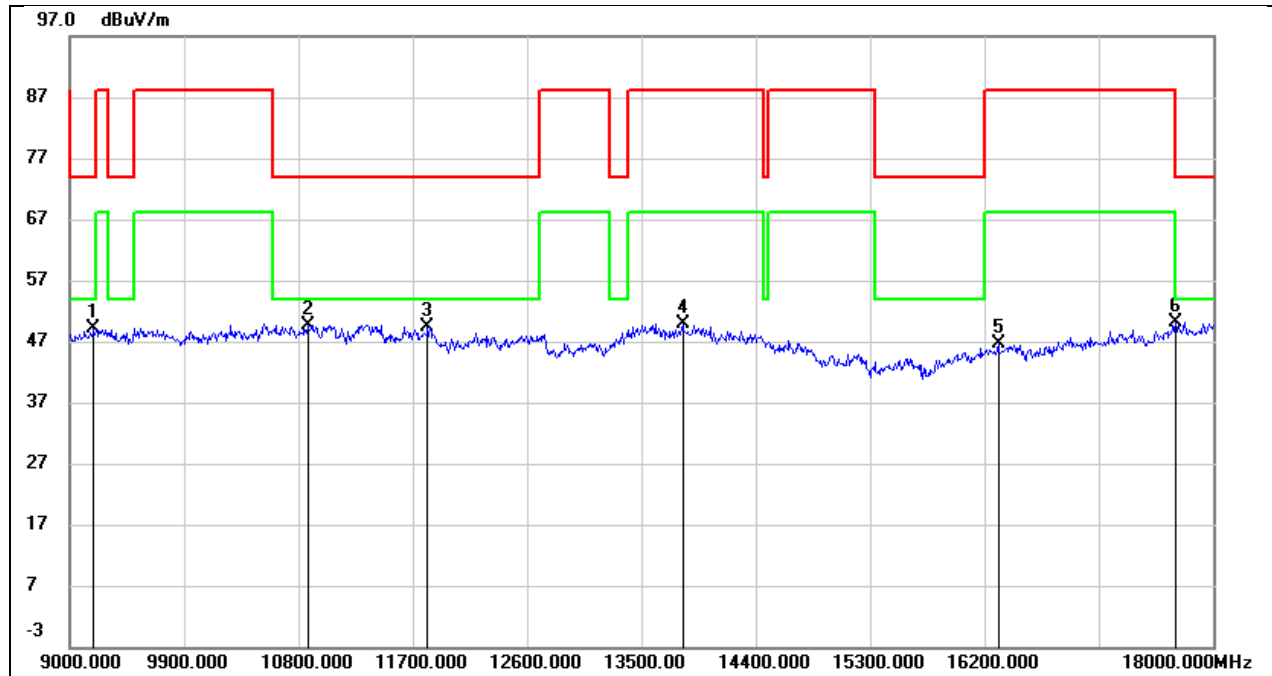


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9189.000        | 37.96          | 11.27          | 49.23           | 74.00          | -24.77      | peak   |
| 2   | 10872.000       | 34.12          | 15.58          | 49.70           | 74.00          | -24.30      | peak   |
| 3   | 11817.000       | 30.95          | 18.52          | 49.47           | 74.00          | -24.53      | peak   |
| 4   | 13824.000       | 26.77          | 23.14          | 49.91           | 88.20          | -38.29      | peak   |
| 5   | 16308.000       | 24.46          | 22.06          | 46.52           | 88.20          | -41.68      | peak   |
| 6   | 17703.000       | 24.41          | 25.81          | 50.22           | 74.00          | -23.78      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 6875      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

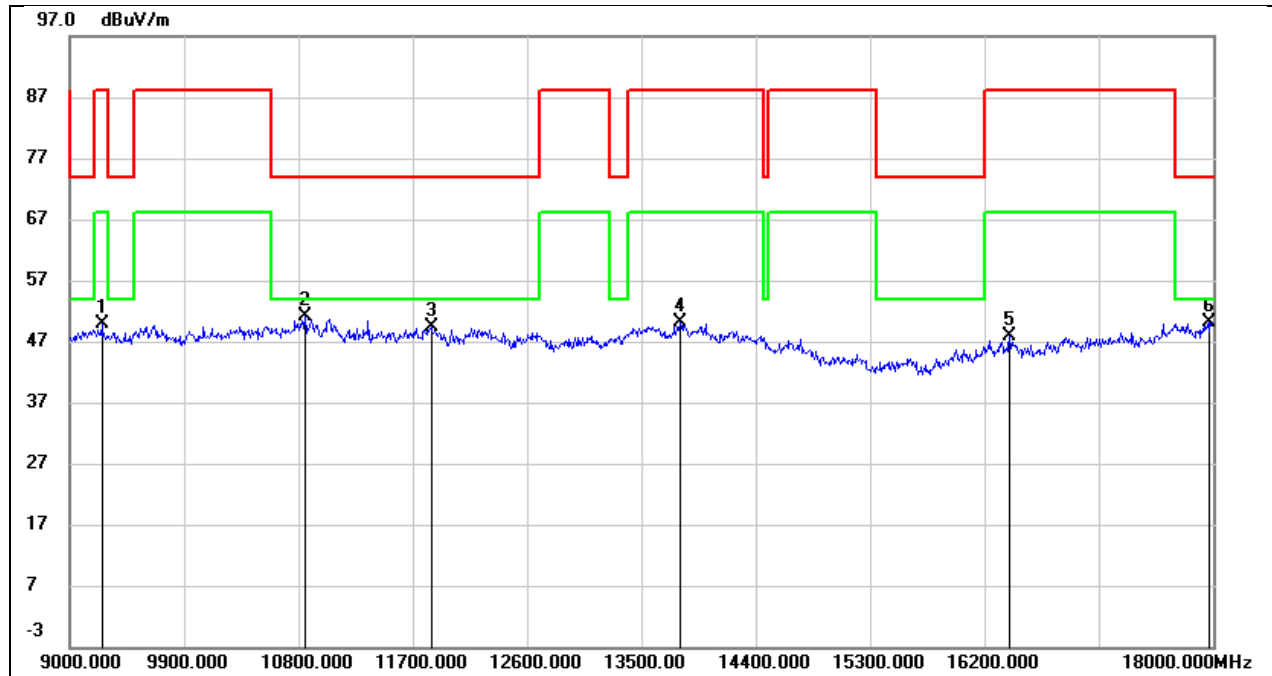


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9252.000           | 38.29             | 11.48             | 49.77              | 88.20             | -38.43         | peak   |
| 2   | 10854.000          | 35.47             | 15.54             | 51.01              | 74.00             | -22.99         | peak   |
| 3   | 11844.000          | 30.86             | 18.56             | 49.42              | 74.00             | -24.58         | peak   |
| 4   | 13806.000          | 26.94             | 23.09             | 50.03              | 88.20             | -38.17         | peak   |
| 5   | 16398.000          | 25.88             | 21.96             | 47.84              | 88.20             | -40.36         | peak   |
| 6   | 17973.000          | 22.25             | 27.88             | 50.13              | 74.00             | -23.87         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU0 | Frequency(MHz): | 6875      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

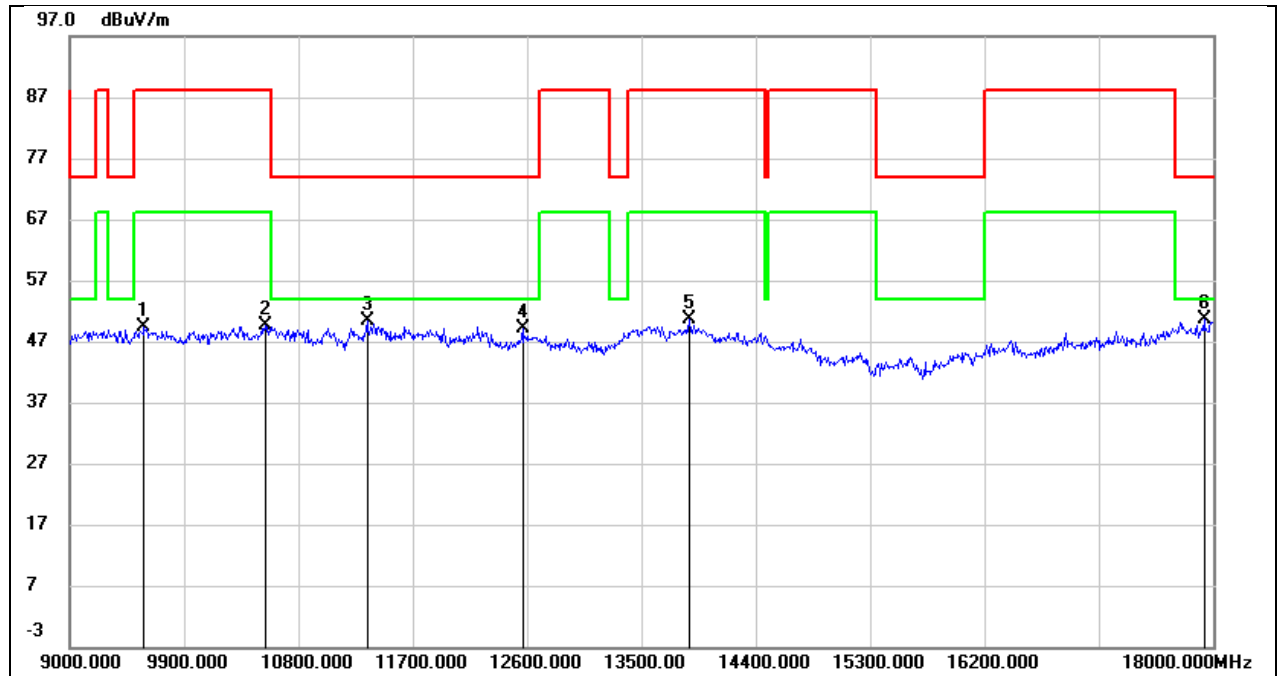


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9585.000        | 36.16          | 13.11          | 49.27           | 88.20          | -38.93      | peak   |
| 2   | 10539.000       | 34.86          | 14.76          | 49.62           | 88.20          | -38.58      | peak   |
| 3   | 11340.000       | 33.28          | 17.07          | 50.35           | 74.00          | -23.65      | peak   |
| 4   | 12564.000       | 29.47          | 19.60          | 49.07           | 74.00          | -24.93      | peak   |
| 5   | 13878.000       | 27.49          | 23.25          | 50.74           | 88.20          | -37.46      | peak   |
| 6   | 17928.000       | 23.09          | 27.51          | 50.60           | 74.00          | -23.40      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 7015      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

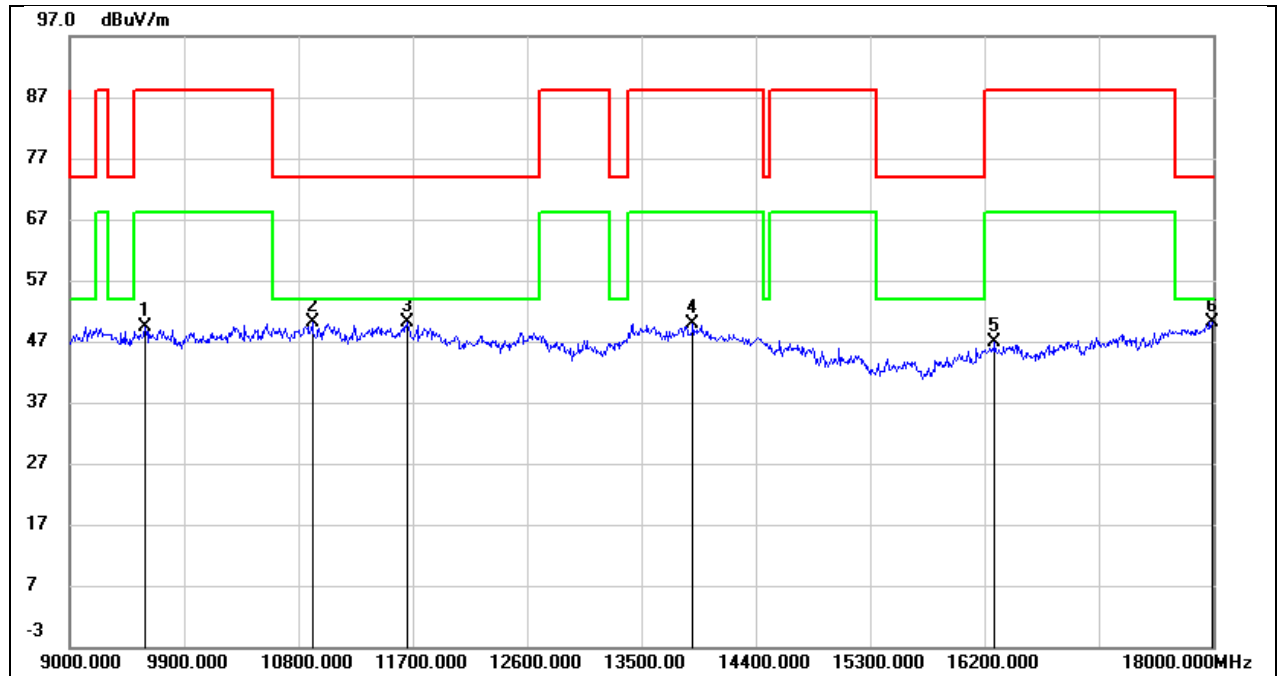


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9594.000           | 36.28             | 13.16             | 49.44              | 88.20             | -38.76         | peak   |
| 2   | 10908.000          | 34.40             | 15.65             | 50.05              | 74.00             | -23.95         | peak   |
| 3   | 11655.000          | 31.68             | 18.37             | 50.05              | 74.00             | -23.95         | peak   |
| 4   | 13905.000          | 26.62             | 23.32             | 49.94              | 88.20             | -38.26         | peak   |
| 5   | 16281.000          | 24.71             | 22.09             | 46.80              | 88.20             | -41.40         | peak   |
| 6   | 17991.000          | 22.19             | 28.02             | 50.21              | 74.00             | -23.79         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU4 | Frequency(MHz): | 7015      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

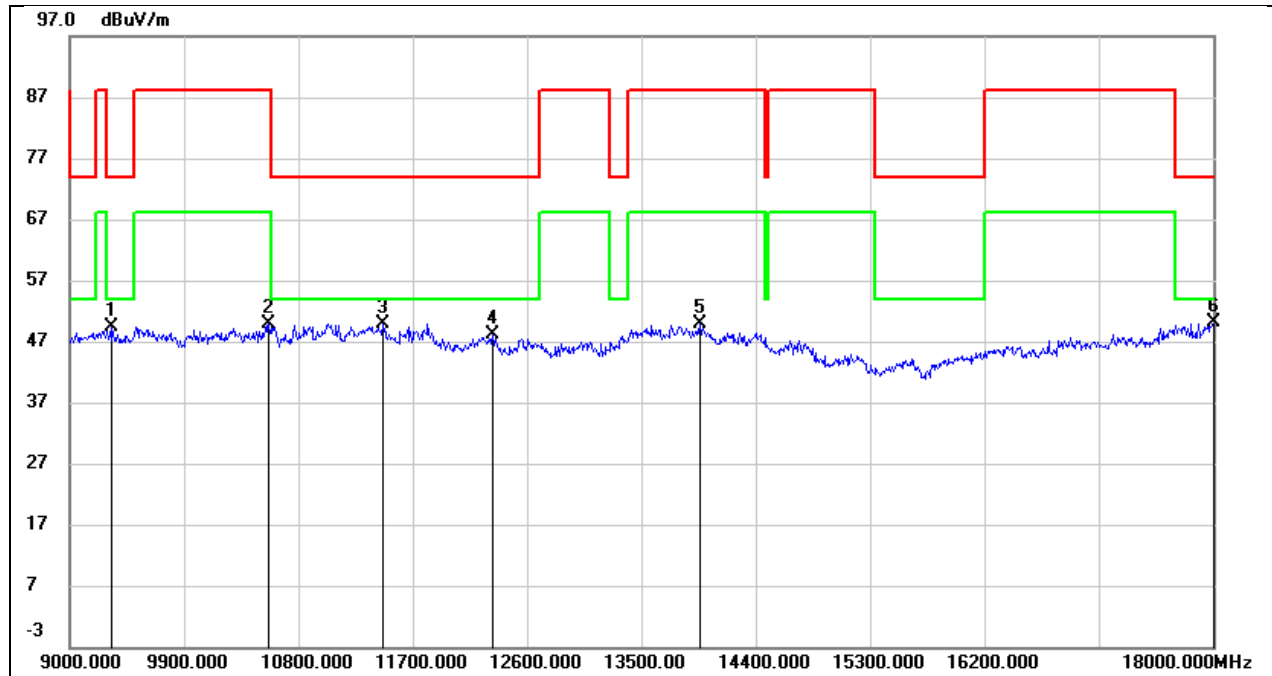


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|--------------------|-------------------|----------------|--------|
| 1   | 9324.000           | 37.64             | 11.74             | 49.38              | 74.00             | -24.62         | peak   |
| 2   | 10566.000          | 35.13             | 14.86             | 49.99              | 88.20             | -38.21         | peak   |
| 3   | 11466.000          | 32.35             | 17.64             | 49.99              | 74.00             | -24.01         | peak   |
| 4   | 12330.000          | 28.81             | 19.40             | 48.21              | 74.00             | -25.79         | peak   |
| 5   | 13959.000          | 26.33             | 23.45             | 49.78              | 88.20             | -38.42         | peak   |
| 6   | 18000.000          | 21.97             | 28.10             | 50.07              | 74.00             | -23.93         | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 7115      |
| Polarity:  | Horizontal                  | Test Voltage:   | DC 3.635V |

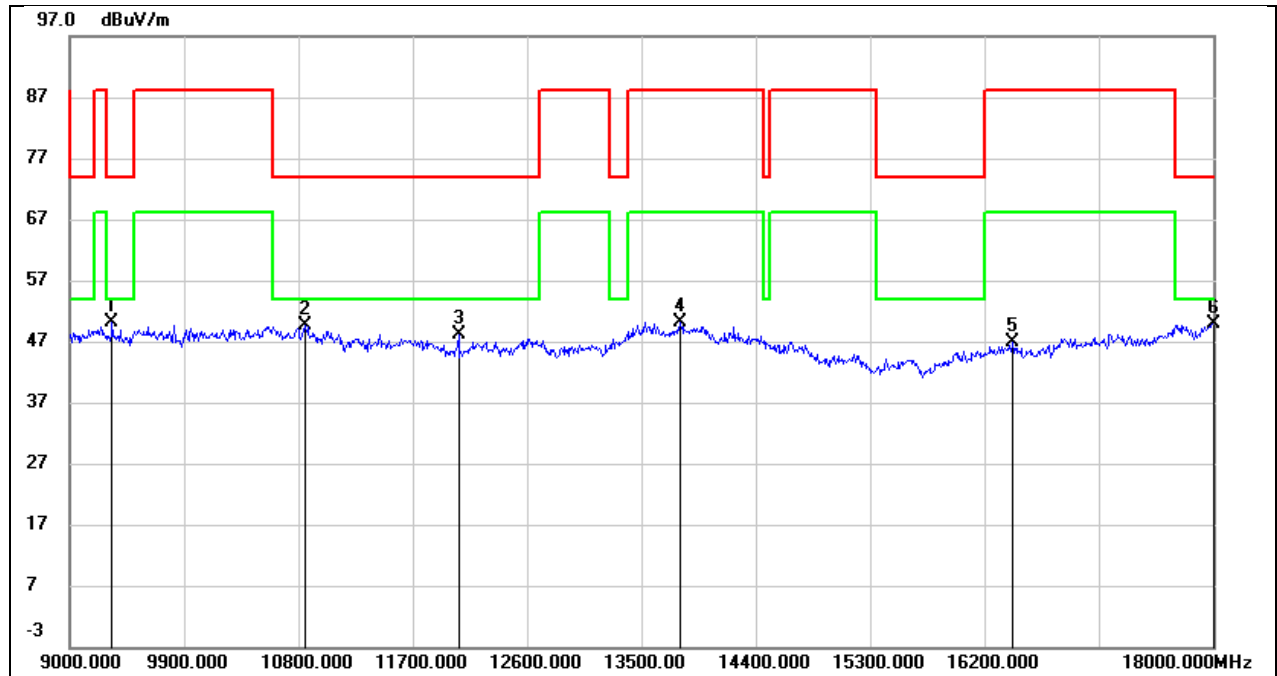

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9333.000        | 38.36          | 11.77          | 50.13           | 74.00          | -23.87      | peak   |
| 2   | 10854.000       | 34.13          | 15.54          | 49.67           | 74.00          | -24.33      | peak   |
| 3   | 12060.000       | 29.11          | 18.96          | 48.07           | 74.00          | -25.93      | peak   |
| 4   | 13806.000       | 26.97          | 23.09          | 50.06           | 88.20          | -38.14      | peak   |
| 5   | 16425.000       | 24.90          | 21.93          | 46.83           | 88.20          | -41.37      | peak   |
| 6   | 18000.000       | 21.81          | 28.10          | 49.91           | 74.00          | -24.09      | peak   |

|            |                             |                 |           |
|------------|-----------------------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20<br>Tone26 RU8 | Frequency(MHz): | 7115      |
| Polarity:  | Vertical                    | Test Voltage:   | DC 3.635V |

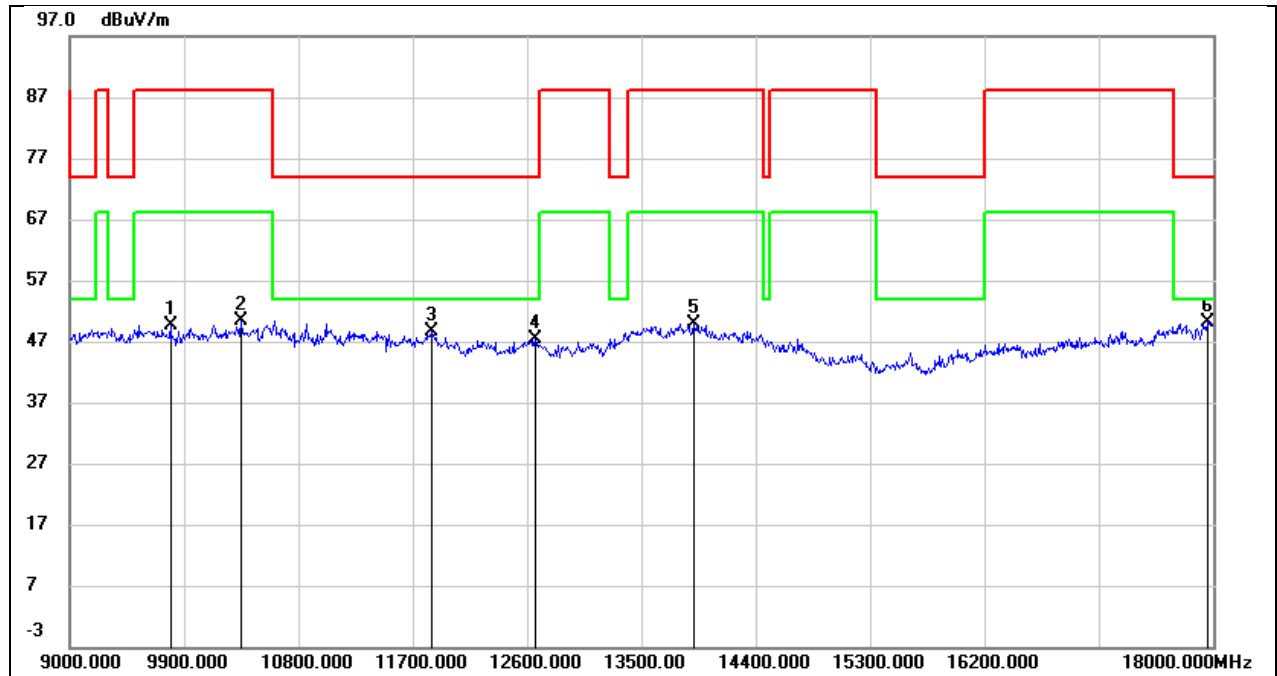


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 9792.000        | 35.99          | 13.73          | 49.72           | 88.20          | -38.48      | peak   |
| 2   | 10350.000       | 36.27          | 14.14          | 50.41           | 88.20          | -37.79      | peak   |
| 3   | 11844.000       | 30.10          | 18.56          | 48.66           | 74.00          | -25.34      | peak   |
| 4   | 12663.000       | 27.68          | 19.72          | 47.40           | 74.00          | -26.60      | peak   |
| 5   | 13914.000       | 26.66          | 23.34          | 50.00           | 88.20          | -38.20      | peak   |
| 6   | 17955.000       | 22.45          | 27.73          | 50.18           | 74.00          | -23.82      | peak   |

Note: Indoor Client and Standard Power Client have been tested, only the worst data of Indoor Client-UNII-6/-8 and Standard Power Client-UNII-5/-7 were recorded in the report.


## 8.6. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

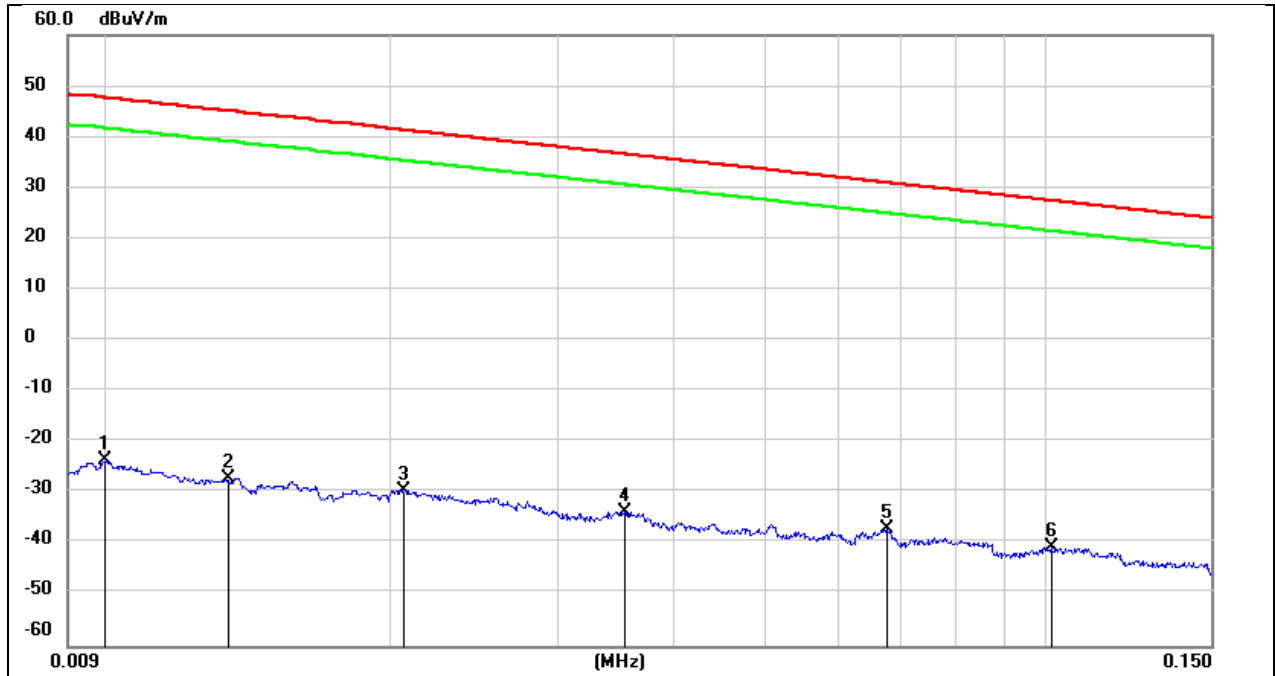


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | FCC<br>Result<br>(dBuV/m) | FCC Limit<br>(dBuV/m) | ISED<br>Result<br>(dBuA/m) | ISED<br>Limit<br>(dBuA/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1   | 0.0100             | 77.72             | -101.40           | -23.68                    | 47.60                 | -75.18                     | -3.90                     | -71.28         | peak   |
| 2   | 0.0134             | 74.23             | -101.39           | -27.16                    | 45.06                 | -78.66                     | -6.44                     | -72.22         | peak   |
| 3   | 0.0206             | 71.92             | -101.35           | -29.43                    | 41.32                 | -80.93                     | -10.18                    | -70.75         | peak   |
| 4   | 0.0354             | 67.76             | -101.41           | -33.65                    | 36.62                 | -85.15                     | -14.88                    | -70.27         | peak   |
| 5   | 0.0675             | 64.64             | -101.56           | -36.92                    | 31.02                 | -88.42                     | -20.48                    | -67.94         | peak   |
| 6   | 0.1014             | 61.06             | -101.79           | -40.73                    | 27.48                 | -92.23                     | -24.02                    | -68.21         | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

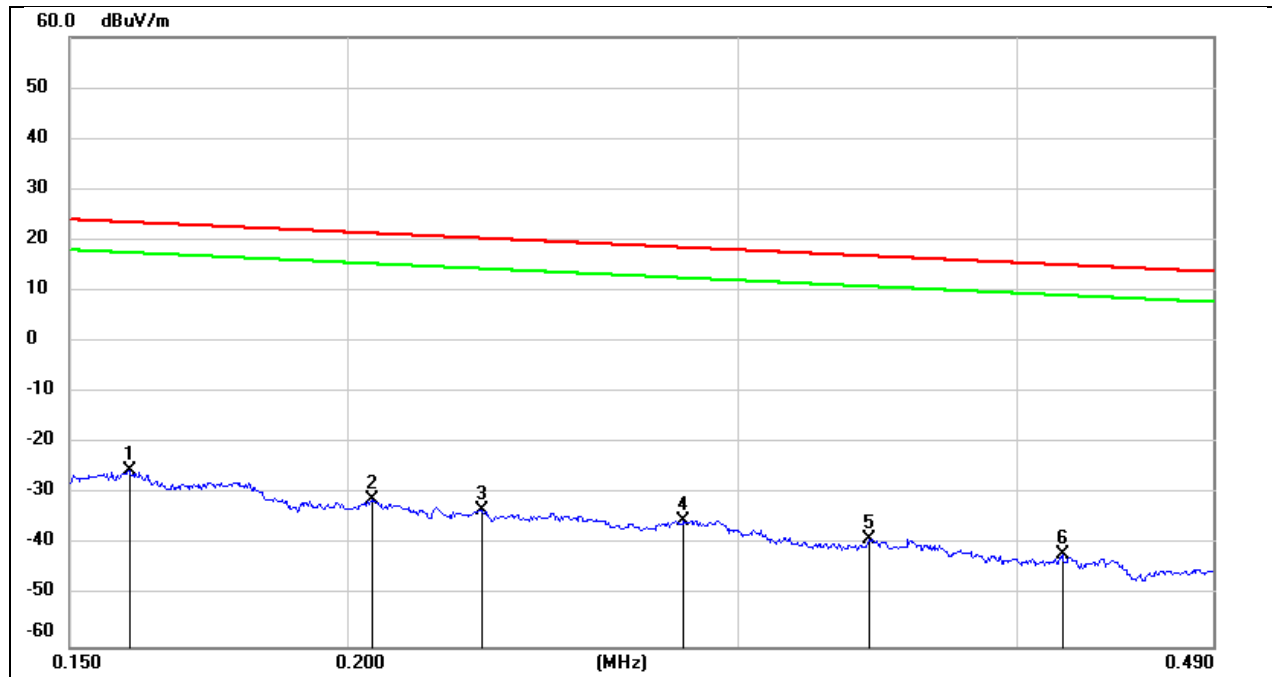

| No. | Frequency | Reading | Correct | FCC Result | FCC Limit | ISED Result | ISED Limit | Margin | Remark |
|-----|-----------|---------|---------|------------|-----------|-------------|------------|--------|--------|
|     | (MHz)     | (dBuV)  | (dB/m)  | (dBuV/m)   | (dBuV/m)  | (dBuA/m)    | (dBuA/m)   | (dB)   |        |
| 1   | 0.1595    | 76.36   | -101.65 | -25.29     | 23.55     | -76.79      | -27.95     | -48.84 | peak   |
| 2   | 0.2053    | 70.80   | -101.73 | -30.93     | 21.35     | -82.43      | -30.15     | -52.28 | peak   |
| 3   | 0.2298    | 68.55   | -101.77 | -33.22     | 20.37     | -84.72      | -31.13     | -53.59 | peak   |
| 4   | 0.2832    | 66.67   | -101.83 | -35.16     | 18.56     | -86.66      | -32.94     | -53.72 | peak   |
| 5   | 0.3431    | 63.17   | -101.90 | -38.73     | 16.89     | -90.23      | -34.61     | -55.62 | peak   |
| 6   | 0.4193    | 60.18   | -101.98 | -41.80     | 15.15     | -93.30      | -36.35     | -56.95 | peak   |


|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

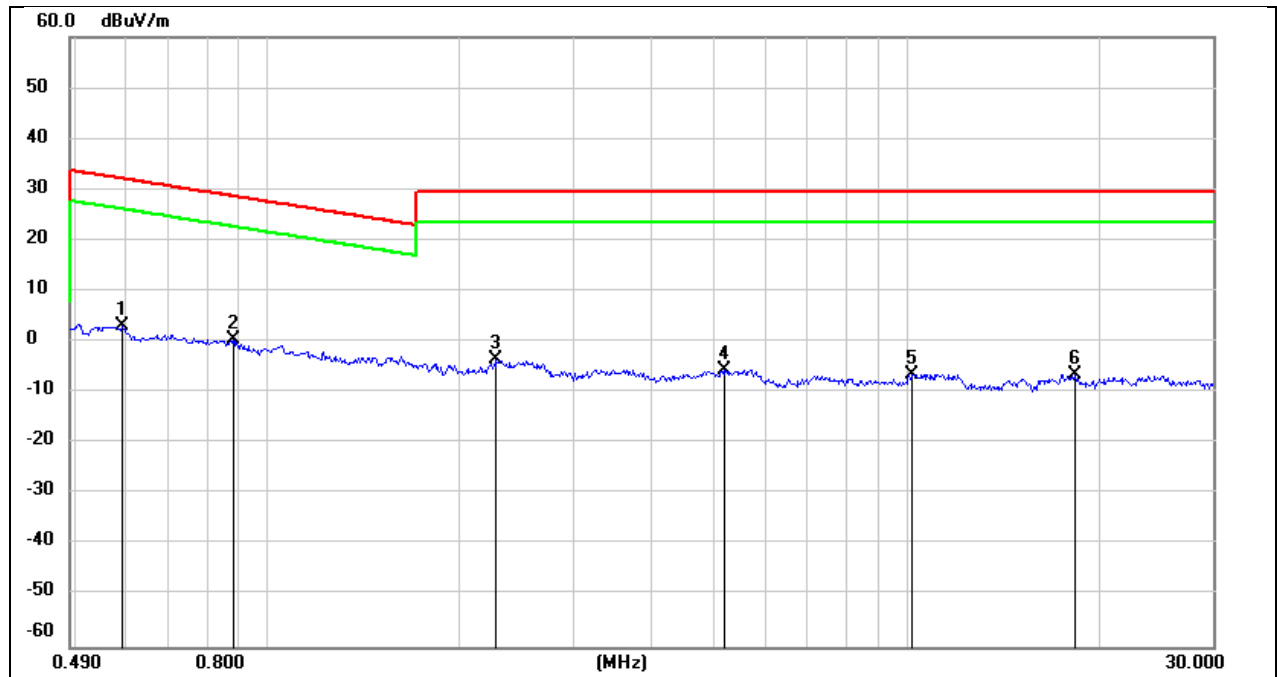

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | FCC<br>Result<br>(dBuV/m) | FCC Limit<br>(dBuV/m) | ISED<br>Result<br>(dBuA/m) | ISED<br>Limit<br>(dBuA/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------|---------------------------|-----------------------|----------------------------|---------------------------|----------------|--------|
| 1   | 0.5917             | 65.24             | -62.08            | 3.16                      | 32.16                 | -48.34                     | -19.34                    | -29.00         | peak   |
| 2   | 0.8820             | 62.68             | -62.19            | 0.49                      | 28.69                 | -51.01                     | -22.81                    | -28.20         | peak   |
| 3   | 2.2736             | 58.19             | -61.75            | -3.56                     | 29.54                 | -55.06                     | -21.96                    | -33.10         | peak   |
| 4   | 5.1561             | 56.05             | -61.47            | -5.42                     | 29.54                 | -56.92                     | -21.96                    | -34.96         | peak   |
| 5   | 10.1692            | 54.50             | -60.81            | -6.31                     | 29.54                 | -57.81                     | -21.96                    | -35.85         | peak   |
| 6   | 18.2545            | 54.43             | -60.90            | -6.47                     | 29.54                 | -57.97                     | -21.96                    | -36.01         | peak   |


## 8.7. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

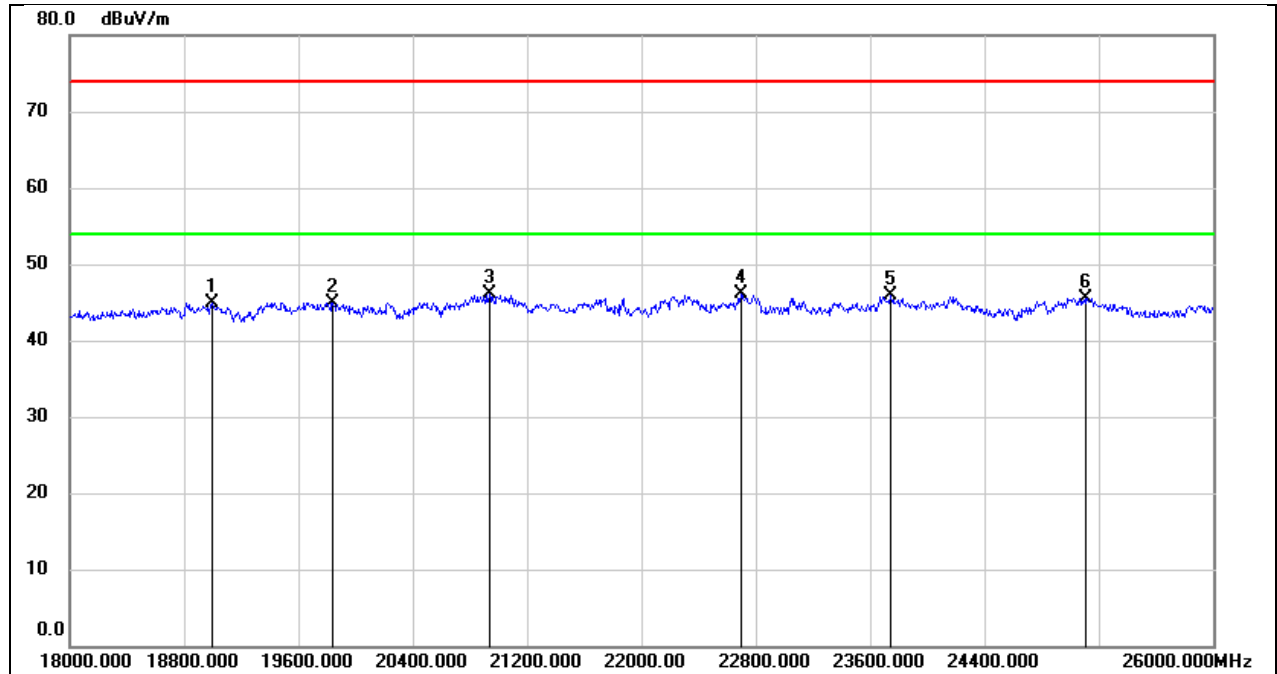

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 19000.000       | 50.06          | -5.22          | 44.84           | 74.00          | -29.16      | peak   |
| 2   | 19840.000       | 50.32          | -5.32          | 45.00           | 74.00          | -29.00      | peak   |
| 3   | 20936.000       | 51.14          | -4.95          | 46.19           | 74.00          | -27.81      | peak   |
| 4   | 22696.000       | 49.78          | -3.73          | 46.05           | 74.00          | -27.95      | peak   |
| 5   | 23744.000       | 49.15          | -3.20          | 45.95           | 74.00          | -28.05      | peak   |
| 6   | 25112.000       | 47.47          | -1.91          | 45.56           | 74.00          | -28.44      | peak   |


|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

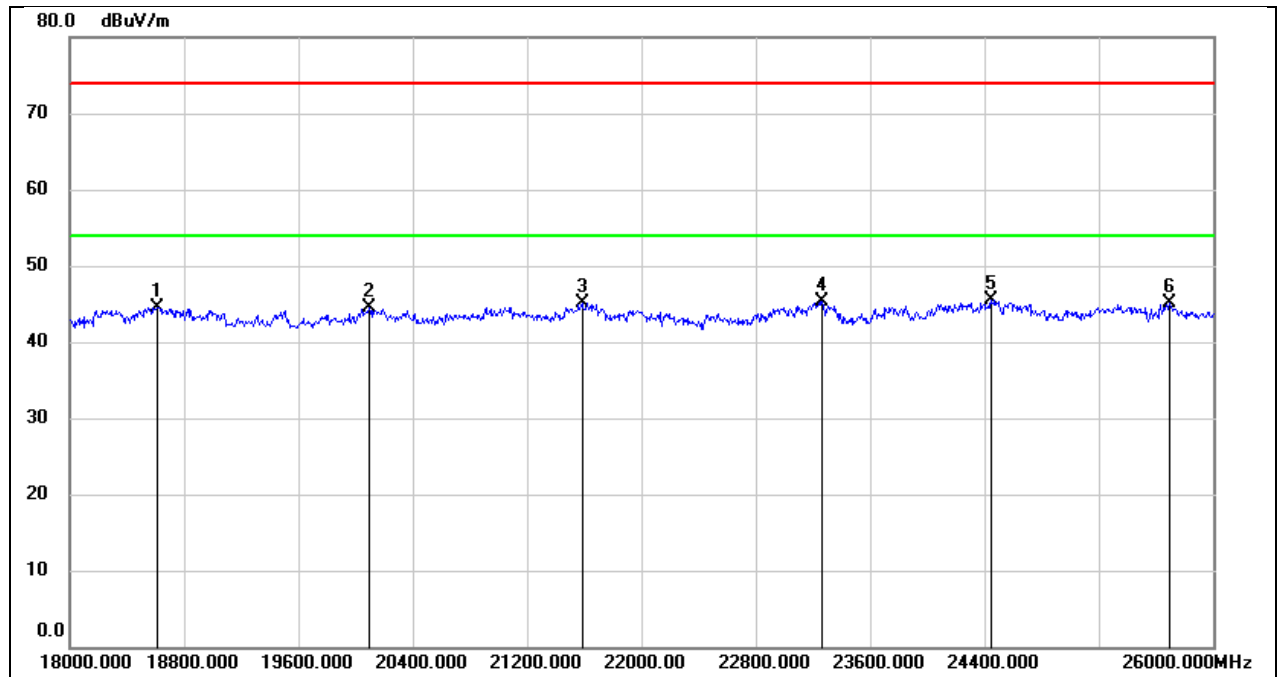

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 18616.000       | 49.89          | -5.34          | 44.55           | 74.00          | -29.45      | peak   |
| 2   | 20096.000       | 50.10          | -5.51          | 44.59           | 74.00          | -29.41      | peak   |
| 3   | 21584.000       | 49.60          | -4.56          | 45.04           | 74.00          | -28.96      | peak   |
| 4   | 23264.000       | 48.76          | -3.36          | 45.40           | 74.00          | -28.60      | peak   |
| 5   | 24448.000       | 47.92          | -2.42          | 45.50           | 74.00          | -28.50      | peak   |
| 6   | 25696.000       | 45.94          | -0.86          | 45.08           | 74.00          | -28.92      | peak   |


## 8.8. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

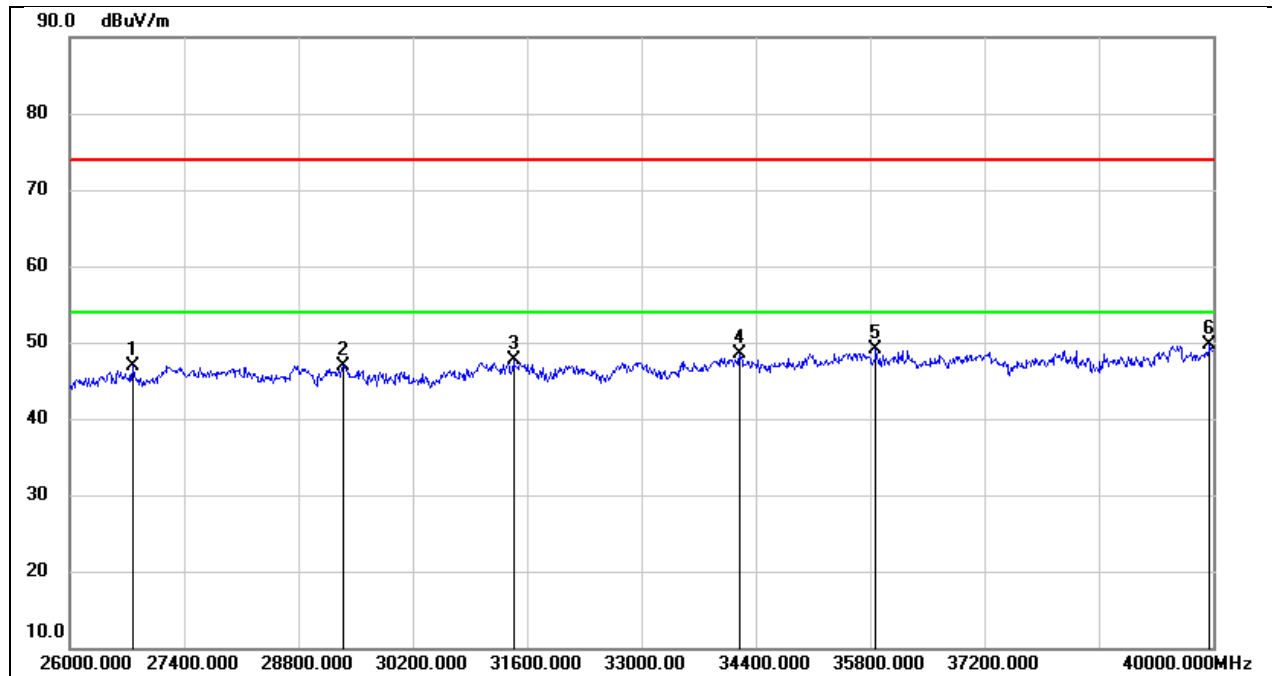

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 26770.000       | 51.70          | -4.83          | 46.87           | 74.00          | -27.13      | peak   |
| 2   | 29346.000       | 47.88          | -0.91          | 46.97           | 74.00          | -27.03      | peak   |
| 3   | 31432.000       | 48.75          | -1.10          | 47.65           | 74.00          | -26.35      | peak   |
| 4   | 34204.000       | 47.35          | 1.13           | 48.48           | 74.00          | -25.52      | peak   |
| 5   | 35870.000       | 45.33          | 3.75           | 49.08           | 74.00          | -24.92      | peak   |
| 6   | 39958.000       | 44.58          | 5.12           | 49.70           | 74.00          | -24.30      | peak   |


|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

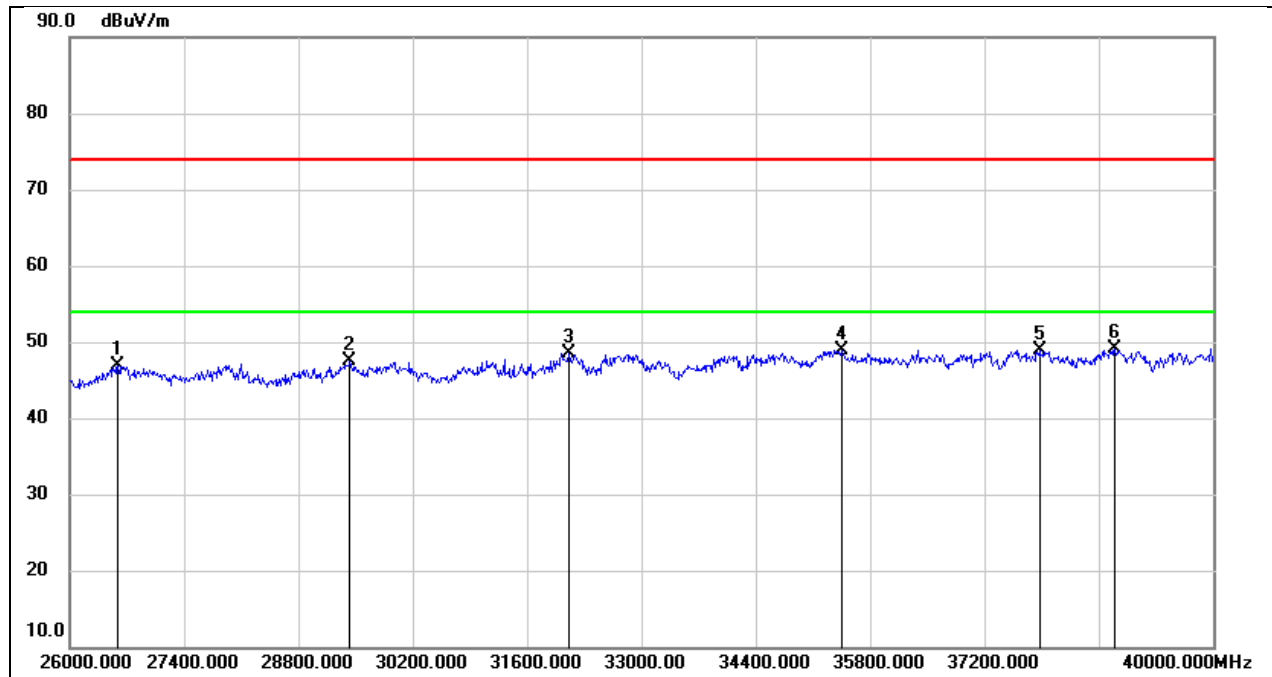

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 26588.000       | 51.61          | -4.80          | 46.81           | 74.00          | -27.19      | peak   |
| 2   | 29430.000       | 48.25          | -0.77          | 47.48           | 74.00          | -26.52      | peak   |
| 3   | 32118.000       | 50.12          | -1.69          | 48.43           | 74.00          | -25.57      | peak   |
| 4   | 35450.000       | 46.45          | 2.55           | 49.00           | 74.00          | -25.00      | peak   |
| 5   | 37872.000       | 45.47          | 3.48           | 48.95           | 74.00          | -25.05      | peak   |
| 6   | 38796.000       | 45.00          | 4.16           | 49.16           | 74.00          | -24.84      | peak   |


## 8.9. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Horizontal    | Test Voltage:   | DC 3.635V |

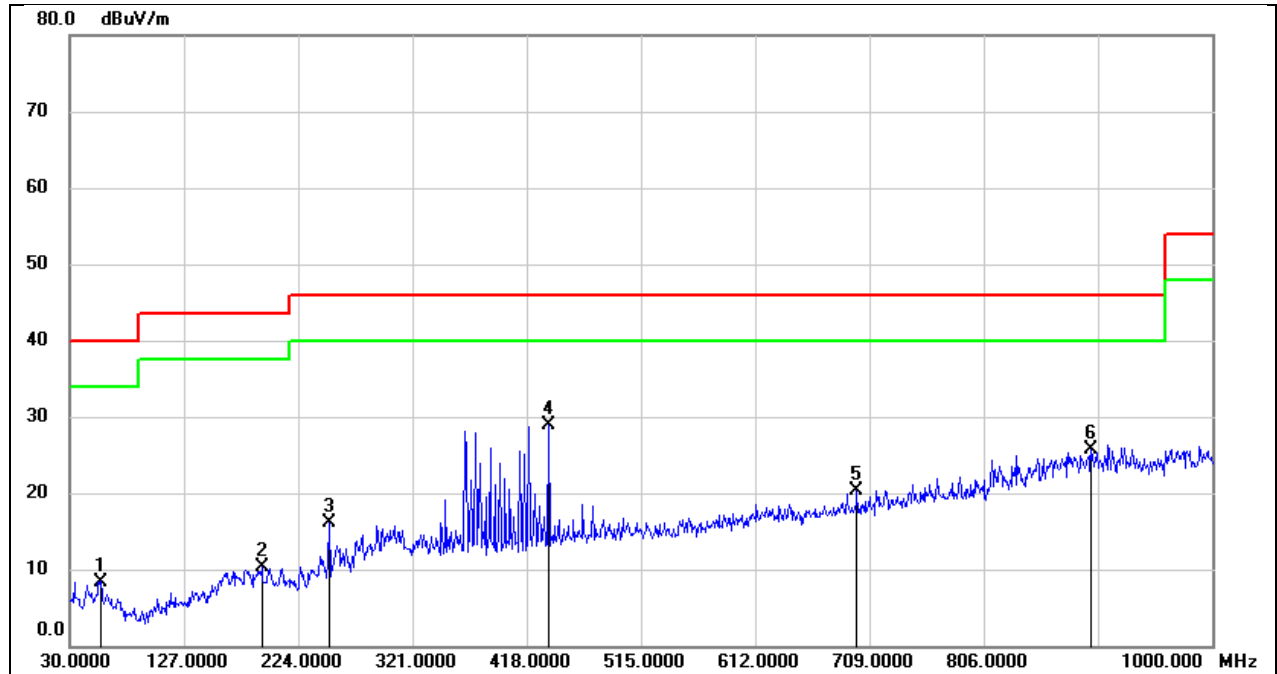

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 56.1900         | 23.38          | -14.98         | 8.40            | 40.00          | -31.60      | peak   |
| 2   | 192.9600        | 22.33          | -12.05         | 10.28           | 43.50          | -33.22      | peak   |
| 3   | 250.1900        | 30.68          | -14.56         | 16.12           | 46.00          | -29.88      | peak   |
| 4   | 436.4300        | 37.38          | -8.54          | 28.84           | 46.00          | -17.16      | peak   |
| 5   | 698.3300        | 24.56          | -4.26          | 20.30           | 46.00          | -25.70      | peak   |
| 6   | 897.1800        | 26.18          | -0.49          | 25.69           | 46.00          | -20.31      | peak   |

|            |               |                 |           |
|------------|---------------|-----------------|-----------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955      |
| Polarity:  | Vertical      | Test Voltage:   | DC 3.635V |

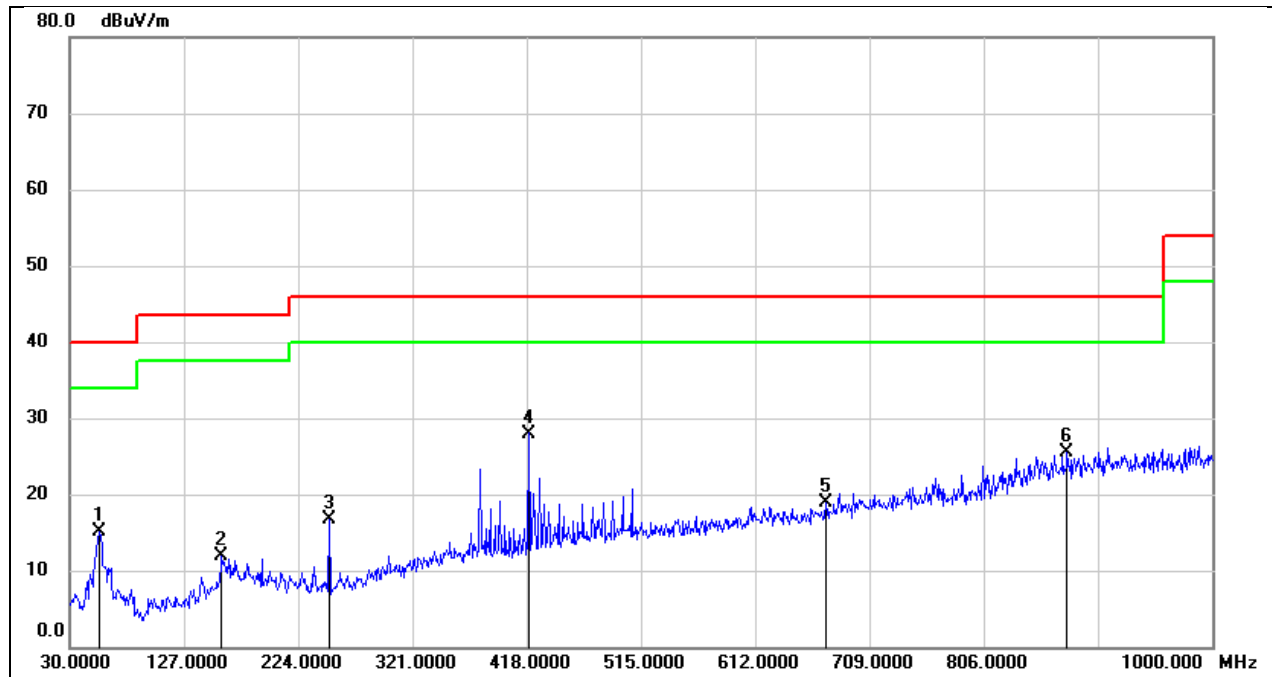

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|----------------|-----------------|----------------|-------------|--------|
| 1   | 55.2200         | 30.03          | -15.00         | 15.03           | 40.00          | -24.97      | peak   |
| 2   | 159.0100        | 24.69          | -12.84         | 11.85           | 43.50          | -31.65      | peak   |
| 3   | 250.1900        | 31.35          | -14.56         | 16.79           | 46.00          | -29.21      | peak   |
| 4   | 419.9400        | 37.02          | -9.02          | 28.00           | 46.00          | -18.00      | peak   |
| 5   | 672.1400        | 23.92          | -4.98          | 18.94           | 46.00          | -27.06      | peak   |
| 6   | 876.8100        | 26.35          | -0.83          | 25.52           | 46.00          | -20.48      | peak   |

## 9. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

| FREQUENCY (MHz) | Quasi-peak | Average   |
|-----------------|------------|-----------|
| 0.15 -0.5       | 66 - 56 *  | 56 - 46 * |
| 0.50 -5.0       | 56.00      | 46.00     |
| 5.0 -30.0       | 60.00      | 50.00     |


### TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST SETUP

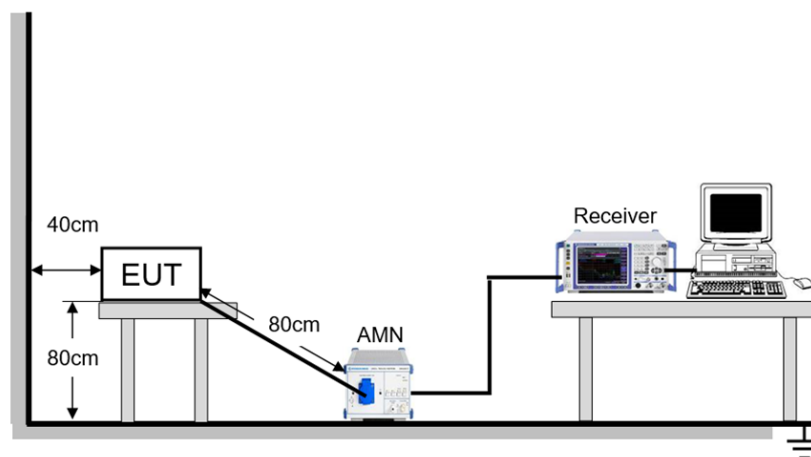

**TEST ENVIRONMENT**


|                     |        |                   |              |
|---------------------|--------|-------------------|--------------|
| Temperature         | 24.1℃  | Relative Humidity | 62%          |
| Atmosphere Pressure | 101kPa | Test Voltage      | AC 120V_60Hz |

**TEST DATE / ENGINEER**

|           |                |         |            |
|-----------|----------------|---------|------------|
| Test Date | August 8, 2025 | Test By | Deacon Tan |
|-----------|----------------|---------|------------|

## TEST RESULTS

|            |               |                 |      |
|------------|---------------|-----------------|------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955 |
| Line:      | Line          |                 |      |

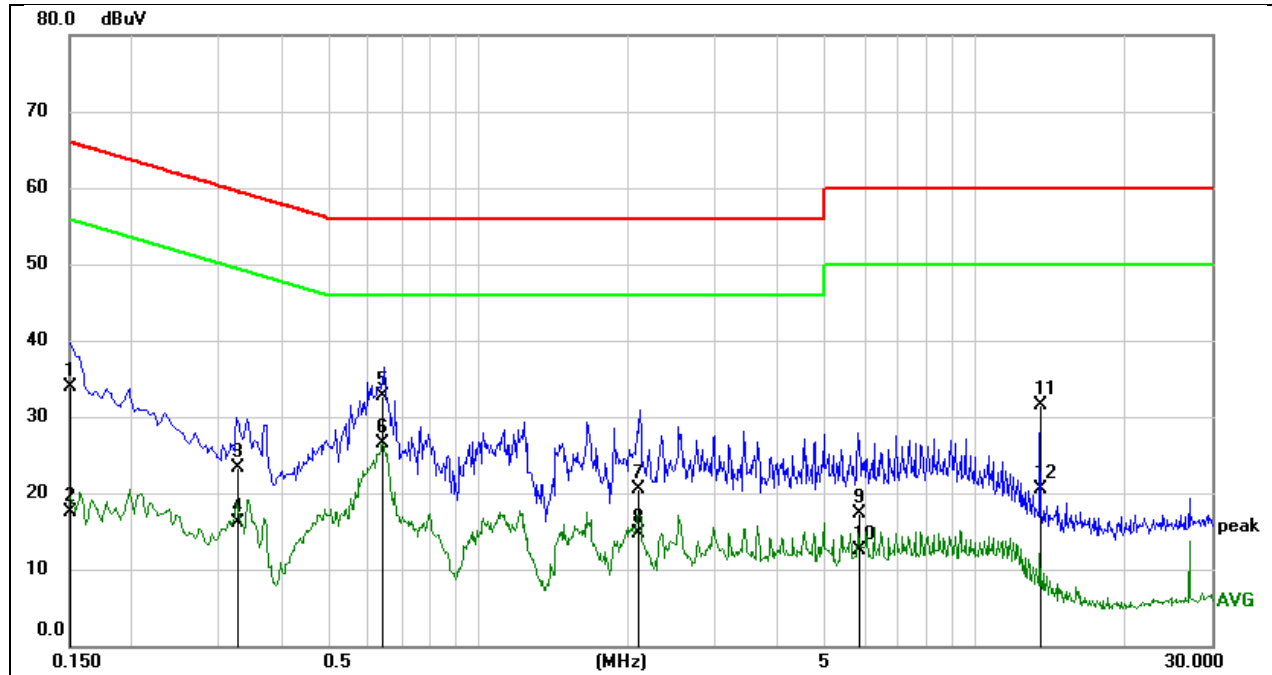


| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|--------|
| 1   | 0.1504          | 24.07          | 9.74         | 33.81         | 65.98        | -32.17      | QP     |
| 2   | 0.1504          | 7.74           | 9.74         | 17.48         | 55.98        | -38.50      | AVG    |
| 3   | 0.3277          | 13.74          | 9.64         | 23.38         | 59.51        | -36.13      | QP     |
| 4   | 0.3277          | 6.44           | 9.64         | 16.08         | 49.51        | -33.43      | AVG    |
| 5   | 0.6396          | 23.13          | 9.63         | 32.76         | 56.00        | -23.24      | QP     |
| 6   | 0.6396          | 16.89          | 9.63         | 26.52         | 46.00        | -19.48      | AVG    |
| 7   | 2.0969          | 10.82          | 9.74         | 20.56         | 56.00        | -35.44      | QP     |
| 8   | 2.0969          | 5.05           | 9.74         | 14.79         | 46.00        | -31.21      | AVG    |
| 9   | 5.8846          | 7.60           | 9.73         | 17.33         | 60.00        | -42.67      | QP     |
| 10  | 5.8846          | 2.73           | 9.73         | 12.46         | 50.00        | -37.54      | AVG    |
| 11  | 13.5599         | 21.83          | 9.74         | 31.57         | 60.00        | -28.43      | QP     |
| 12  | 13.5599         | 10.70          | 9.74         | 20.44         | 50.00        | -29.56      | AVG    |

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

|            |               |                 |      |
|------------|---------------|-----------------|------|
| Test Mode: | 802.11ax HE20 | Frequency(MHz): | 5955 |
| Line:      | Neutral       |                 |      |

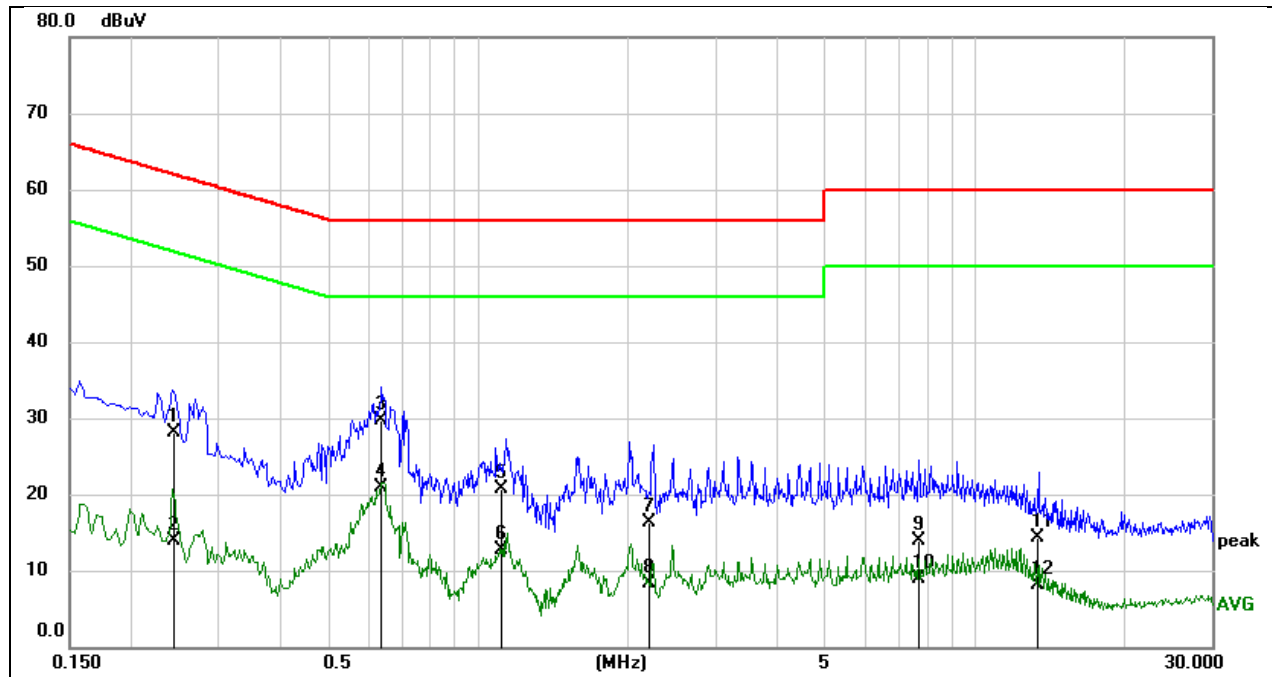

| No. | Frequency (MHz) | Reading (dBuV) | Correct (dB) | Result (dBuV) | Limit (dBuV) | Margin (dB) | Remark |
|-----|-----------------|----------------|--------------|---------------|--------------|-------------|--------|
| 1   | 0.2434          | 18.47          | 9.64         | 28.11         | 61.98        | -33.87      | QP     |
| 2   | 0.2434          | 4.21           | 9.64         | 13.85         | 51.98        | -38.13      | AVG    |
| 3   | 0.6320          | 20.17          | 9.63         | 29.80         | 56.00        | -26.20      | QP     |
| 4   | 0.6320          | 11.26          | 9.63         | 20.89         | 46.00        | -25.11      | AVG    |
| 5   | 1.1200          | 11.03          | 9.63         | 20.66         | 56.00        | -35.34      | QP     |
| 6   | 1.1200          | 3.09           | 9.63         | 12.72         | 46.00        | -33.28      | AVG    |
| 7   | 2.2100          | 6.59           | 9.64         | 16.23         | 56.00        | -39.77      | QP     |
| 8   | 2.2100          | -1.42          | 9.64         | 8.22          | 46.00        | -37.78      | AVG    |
| 9   | 7.6951          | 4.23           | 9.73         | 13.96         | 60.00        | -46.04      | QP     |
| 10  | 7.6951          | -0.80          | 9.73         | 8.93          | 50.00        | -41.07      | AVG    |
| 11  | 13.3889         | 4.64           | 9.74         | 14.38         | 60.00        | -45.62      | QP     |
| 12  | 13.3889         | -1.69          | 9.74         | 8.05          | 50.00        | -41.95      | AVG    |

#### Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## 10. ANTENNA REQUIREMENT

### REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DESCRIPTION

Pass

## 11. TEST DATA

### 11.1. APPENDIX A1: EMISSION BANDWIDTH

#### 11.1.1. Test Result-Indoor Client

| Test Mode  | Antenna | Frequency[MHz] | 26db EBW [MHz] | FL[MHz]  | FH[MHz]  | Verdict |
|------------|---------|----------------|----------------|----------|----------|---------|
| 11A-CDD    | Ant0    | 5955           | 18.960         | 5945.400 | 5964.360 | PASS    |
|            | Ant1    | 5955           | 19.120         | 5945.400 | 5964.520 | PASS    |
|            | Ant0    | 6175           | 19.720         | 6164.840 | 6184.560 | PASS    |
|            | Ant1    | 6175           | 19.000         | 6165.440 | 6184.440 | PASS    |
|            | Ant0    | 6415           | 19.520         | 6404.840 | 6424.360 | PASS    |
|            | Ant1    | 6415           | 19.480         | 6405.160 | 6424.640 | PASS    |
|            | Ant0    | 6435           | 20.480         | 6424.800 | 6445.280 | PASS    |
|            | Ant1    | 6435           | 20.920         | 6424.560 | 6445.480 | PASS    |
|            | Ant0    | 6475           | 20.560         | 6464.680 | 6485.240 | PASS    |
|            | Ant1    | 6475           | 20.560         | 6464.640 | 6485.200 | PASS    |
|            | Ant0    | 6515           | 20.520         | 6504.760 | 6525.280 | PASS    |
|            | Ant1    | 6515           | 20.480         | 6504.760 | 6525.240 | PASS    |
|            | Ant0    | 6535           | 20.840         | 6524.480 | 6545.320 | PASS    |
|            | Ant1    | 6535           | 20.680         | 6524.760 | 6545.440 | PASS    |
|            | Ant0    | 6715           | 20.800         | 6704.600 | 6725.400 | PASS    |
|            | Ant1    | 6715           | 21.080         | 6704.520 | 6725.600 | PASS    |
|            | Ant0    | 6855           | 20.600         | 6844.640 | 6865.240 | PASS    |
|            | Ant1    | 6855           | 20.440         | 6844.800 | 6865.240 | PASS    |
|            | Ant0    | 6875           | 20.640         | 6864.720 | 6885.360 | PASS    |
|            | Ant1    | 6875           | 20.800         | 6864.560 | 6885.360 | PASS    |
|            | Ant0    | 7015           | 20.760         | 7004.680 | 7025.440 | PASS    |
|            | Ant1    | 7015           | 20.520         | 7004.840 | 7025.360 | PASS    |
|            | Ant0    | 7115           | 20.320         | 7104.880 | 7125.200 | PASS    |
|            | Ant1    | 7115           | 20.720         | 7104.640 | 7125.360 | PASS    |
| 11AX20MIMO | Ant0    | 5955           | 20.600         | 5944.760 | 5965.360 | PASS    |
|            | Ant1    | 5955           | 20.720         | 5945.000 | 5965.720 | PASS    |
|            | Ant0    | 6175           | 20.640         | 6164.680 | 6185.320 | PASS    |
|            | Ant1    | 6175           | 20.560         | 6164.720 | 6185.280 | PASS    |
|            | Ant0    | 6415           | 20.360         | 6404.920 | 6425.280 | PASS    |
|            | Ant1    | 6415           | 20.400         | 6404.560 | 6424.960 | PASS    |
|            | Ant0    | 6435           | 20.600         | 6424.600 | 6445.200 | PASS    |
|            | Ant1    | 6435           | 20.440         | 6424.920 | 6445.360 | PASS    |
|            | Ant0    | 6475           | 20.560         | 6464.760 | 6485.320 | PASS    |
|            | Ant1    | 6475           | 20.520         | 6464.640 | 6485.160 | PASS    |
|            | Ant0    | 6515           | 20.960         | 6504.440 | 6525.400 | PASS    |
|            | Ant1    | 6515           | 20.560         | 6504.640 | 6525.200 | PASS    |
|            | Ant0    | 6535           | 20.440         | 6524.800 | 6545.240 | PASS    |
|            | Ant1    | 6535           | 20.320         | 6524.880 | 6545.200 | PASS    |
|            | Ant0    | 6715           | 20.680         | 6704.600 | 6725.280 | PASS    |
|            | Ant1    | 6715           | 20.440         | 6704.840 | 6725.280 | PASS    |
|            | Ant0    | 6855           | 20.440         | 6844.720 | 6865.160 | PASS    |
|            | Ant1    | 6855           | 20.440         | 6844.840 | 6865.280 | PASS    |
|            | Ant0    | 6875           | 20.360         | 6864.880 | 6885.240 | PASS    |
|            | Ant1    | 6875           | 20.400         | 6864.760 | 6885.160 | PASS    |
|            | Ant0    | 7015           | 20.440         | 7004.760 | 7025.200 | PASS    |
|            | Ant1    | 7015           | 20.360         | 7004.760 | 7025.120 | PASS    |
|            | Ant0    | 7115           | 20.400         | 7104.760 | 7125.160 | PASS    |
|            | Ant1    | 7115           | 20.720         | 7104.560 | 7125.280 | PASS    |
| 11AX40MIMO | Ant0    | 5965           | 40.000         | 5944.840 | 5984.840 | PASS    |
|            | Ant1    | 5965           | 39.760         | 5944.920 | 5984.680 | PASS    |
|            | Ant0    | 6165           | 39.760         | 6145.160 | 6184.920 | PASS    |
|            | Ant1    | 6165           | 39.680         | 6145.080 | 6184.760 | PASS    |


|             |      |      |         |          |          |      |
|-------------|------|------|---------|----------|----------|------|
|             | Ant0 | 6405 | 39.360  | 6385.400 | 6424.760 | PASS |
|             | Ant1 | 6405 | 39.520  | 6385.320 | 6424.840 | PASS |
|             | Ant0 | 6445 | 39.680  | 6425.160 | 6464.840 | PASS |
|             | Ant1 | 6445 | 39.840  | 6425.080 | 6464.920 | PASS |
|             | Ant0 | 6485 | 39.680  | 6465.080 | 6504.760 | PASS |
|             | Ant1 | 6485 | 39.840  | 6465.000 | 6504.840 | PASS |
|             | Ant0 | 6525 | 39.840  | 6505.240 | 6545.080 | PASS |
|             | Ant1 | 6525 | 39.840  | 6505.240 | 6545.080 | PASS |
|             | Ant0 | 6565 | 39.680  | 6545.240 | 6584.920 | PASS |
|             | Ant1 | 6565 | 39.440  | 6545.160 | 6584.600 | PASS |
|             | Ant0 | 6725 | 40.000  | 6705.000 | 6745.000 | PASS |
|             | Ant1 | 6725 | 39.840  | 6705.160 | 6745.000 | PASS |
|             | Ant0 | 6845 | 40.000  | 6825.000 | 6865.000 | PASS |
|             | Ant1 | 6845 | 39.440  | 6825.240 | 6864.680 | PASS |
|             | Ant0 | 6885 | 39.760  | 6865.080 | 6904.840 | PASS |
|             | Ant1 | 6885 | 39.600  | 6865.160 | 6904.760 | PASS |
|             | Ant0 | 7005 | 40.080  | 6985.000 | 7025.080 | PASS |
|             | Ant1 | 7005 | 39.760  | 6985.240 | 7025.000 | PASS |
|             | Ant0 | 7085 | 39.760  | 7065.080 | 7104.840 | PASS |
|             | Ant1 | 7085 | 39.600  | 7065.240 | 7104.840 | PASS |
| 11AX80MIMO  | Ant0 | 5985 | 80.320  | 5945.000 | 6025.320 | PASS |
|             | Ant1 | 5985 | 80.960  | 5944.360 | 6025.320 | PASS |
|             | Ant0 | 6145 | 80.160  | 6105.000 | 6185.160 | PASS |
|             | Ant1 | 6145 | 80.640  | 6104.840 | 6185.480 | PASS |
|             | Ant0 | 6385 | 80.800  | 6344.520 | 6425.320 | PASS |
|             | Ant1 | 6385 | 80.320  | 6344.840 | 6425.160 | PASS |
|             | Ant0 | 6465 | 80.960  | 6424.360 | 6505.320 | PASS |
|             | Ant1 | 6465 | 80.640  | 6424.360 | 6505.000 | PASS |
|             | Ant0 | 6545 | 80.320  | 6504.840 | 6585.160 | PASS |
|             | Ant1 | 6545 | 80.960  | 6504.520 | 6585.480 | PASS |
|             | Ant0 | 6705 | 80.800  | 6664.680 | 6745.480 | PASS |
|             | Ant1 | 6705 | 80.320  | 6664.680 | 6745.000 | PASS |
|             | Ant0 | 6785 | 80.640  | 6744.520 | 6825.160 | PASS |
|             | Ant1 | 6785 | 81.760  | 6744.040 | 6825.800 | PASS |
|             | Ant0 | 6865 | 79.840  | 6825.000 | 6904.840 | PASS |
|             | Ant1 | 6865 | 80.800  | 6824.360 | 6905.160 | PASS |
|             | Ant0 | 6945 | 80.960  | 6904.520 | 6985.480 | PASS |
|             | Ant1 | 6945 | 81.440  | 6904.840 | 6986.280 | PASS |
|             | Ant0 | 7025 | 80.640  | 6984.680 | 7065.320 | PASS |
|             | Ant1 | 7025 | 80.640  | 6984.520 | 7065.160 | PASS |
| 11AX160MIMO | Ant0 | 6025 | 164.160 | 5942.440 | 6106.600 | PASS |
|             | Ant1 | 6025 | 164.800 | 5942.120 | 6106.920 | PASS |
|             | Ant0 | 6185 | 165.120 | 6102.760 | 6267.880 | PASS |
|             | Ant1 | 6185 | 163.200 | 6103.400 | 6266.600 | PASS |
|             | Ant0 | 6345 | 163.200 | 6262.760 | 6425.960 | PASS |
|             | Ant1 | 6345 | 163.200 | 6263.720 | 6426.920 | PASS |
|             | Ant0 | 6505 | 161.920 | 6424.040 | 6585.960 | PASS |
|             | Ant1 | 6505 | 163.200 | 6423.400 | 6586.600 | PASS |
|             | Ant0 | 6665 | 163.840 | 6583.080 | 6746.920 | PASS |
|             | Ant1 | 6665 | 163.520 | 6583.080 | 6746.600 | PASS |
|             | Ant0 | 6825 | 163.840 | 6742.760 | 6906.600 | PASS |
|             | Ant1 | 6825 | 163.520 | 6742.440 | 6905.960 | PASS |
|             | Ant0 | 6985 | 163.200 | 6903.400 | 7066.600 | PASS |
|             | Ant1 | 6985 | 162.240 | 6903.720 | 7065.960 | PASS |

| Test Mode  | Antenna | Channel | Ru Size | Ru Index | 26db BW [MHz] | FL [MHz] | FH [MHz] | Verdict |
|------------|---------|---------|---------|----------|---------------|----------|----------|---------|
| 11AX20MIMO | Ant0    | 5955    | 26Tone  | RU0      | 21.240        | 5943.320 | 5964.560 | PASS    |
|            |         |         | 52Tone  | RU37     | 22.080        | 5942.960 | 5965.040 | PASS    |
|            |         |         | 106Tone | RU53     | 22.560        | 5942.960 | 5965.520 | PASS    |
|            | Ant1    | 5955    | 26Tone  | RU0      | 21.080        | 5943.320 | 5964.400 | PASS    |
|            |         |         | 52Tone  | RU37     | 21.720        | 5943.000 | 5964.720 | PASS    |
|            |         |         | 106Tone | RU53     | 21.680        | 5943.360 | 5965.040 | PASS    |
|            | Ant0    | 6175    | 26Tone  | RU4      | 19.040        | 6165.600 | 6184.640 | PASS    |
|            |         |         | 52Tone  | RU38     | 20.000        | 6165.120 | 6185.120 | PASS    |
|            |         |         | 106Tone | RU53     | 22.360        | 6163.200 | 6185.560 | PASS    |
|            | Ant1    | 6175    | 26Tone  | RU4      | 18.640        | 6165.760 | 6184.400 | PASS    |
|            |         |         | 52Tone  | RU38     | 19.400        | 6165.520 | 6184.920 | PASS    |
|            |         |         | 106Tone | RU53     | 21.040        | 6163.760 | 6184.800 | PASS    |
|            | Ant0    | 6415    | 26Tone  | RU8      | 20.840        | 6405.680 | 6426.520 | PASS    |
|            |         |         | 52Tone  | RU40     | 21.160        | 6405.280 | 6426.440 | PASS    |
|            |         |         | 106Tone | RU54     | 22.280        | 6404.520 | 6426.800 | PASS    |
|            | Ant1    | 6415    | 26Tone  | RU8      | 20.680        | 6405.760 | 6426.440 | PASS    |
|            |         |         | 52Tone  | RU40     | 20.560        | 6405.800 | 6426.360 | PASS    |
|            |         |         | 106Tone | RU54     | 21.200        | 6405.520 | 6426.720 | PASS    |
|            | Ant0    | 6435    | 26Tone  | RU0      | 21.440        | 6423.120 | 6444.560 | PASS    |
|            |         |         | 52Tone  | RU37     | 21.800        | 6423.080 | 6444.880 | PASS    |
|            |         |         | 106Tone | RU53     | 22.280        | 6423.080 | 6445.360 | PASS    |
|            | Ant1    | 6435    | 26Tone  | RU0      | 21.080        | 6423.320 | 6444.400 | PASS    |
|            |         |         | 52Tone  | RU37     | 21.760        | 6422.960 | 6444.720 | PASS    |
|            |         |         | 106Tone | RU53     | 21.440        | 6423.520 | 6444.960 | PASS    |
|            | Ant0    | 6475    | 26Tone  | RU4      | 19.000        | 6465.640 | 6484.640 | PASS    |
|            |         |         | 52Tone  | RU38     | 19.760        | 6465.280 | 6485.040 | PASS    |
|            |         |         | 106Tone | RU53     | 22.680        | 6462.880 | 6485.560 | PASS    |
|            | Ant1    | 6475    | 26Tone  | RU4      | 18.640        | 6465.800 | 6484.440 | PASS    |
|            |         |         | 52Tone  | RU38     | 19.240        | 6465.600 | 6484.840 | PASS    |
|            |         |         | 106Tone | RU53     | 21.240        | 6463.760 | 6485.000 | PASS    |
|            | Ant0    | 6515    | 26Tone  | RU8      | 20.640        | 6505.640 | 6526.280 | PASS    |
|            |         |         | 52Tone  | RU40     | 21.120        | 6505.360 | 6526.480 | PASS    |
|            |         |         | 106Tone | RU54     | 21.760        | 6504.800 | 6526.560 | PASS    |
|            | Ant1    | 6515    | 26Tone  | RU8      | 20.640        | 6505.760 | 6526.400 | PASS    |
|            |         |         | 52Tone  | RU40     | 20.760        | 6505.600 | 6526.360 | PASS    |
|            |         |         | 106Tone | RU54     | 21.000        | 6505.360 | 6526.360 | PASS    |
|            | Ant0    | 6535    | 26Tone  | RU0      | 21.320        | 6523.240 | 6544.560 | PASS    |
|            |         |         | 52Tone  | RU37     | 22.240        | 6522.760 | 6545.000 | PASS    |
|            |         |         | 106Tone | RU53     | 22.520        | 6522.920 | 6545.440 | PASS    |
|            | Ant1    | 6535    | 26Tone  | RU0      | 21.000        | 6523.360 | 6544.360 | PASS    |
|            |         |         | 52Tone  | RU37     | 21.760        | 6522.960 | 6544.720 | PASS    |
|            |         |         | 106Tone | RU53     | 21.400        | 6523.560 | 6544.960 | PASS    |
|            | Ant0    | 6715    | 26Tone  | RU4      | 19.120        | 6705.600 | 6724.720 | PASS    |
|            |         |         | 52Tone  | RU38     | 19.880        | 6705.200 | 6725.080 | PASS    |
|            |         |         | 106Tone | RU53     | 22.480        | 6702.960 | 6725.440 | PASS    |
|            | Ant1    | 6715    | 26Tone  | RU4      | 18.680        | 6705.760 | 6724.440 | PASS    |
|            |         |         | 52Tone  | RU38     | 19.160        | 6705.600 | 6724.760 | PASS    |
|            |         |         | 106Tone | RU53     | 21.720        | 6703.320 | 6725.040 | PASS    |
|            | Ant0    | 6855    | 26Tone  | RU8      | 21.080        | 6845.680 | 6866.760 | PASS    |
|            |         |         | 52Tone  | RU40     | 21.720        | 6845.240 | 6866.960 | PASS    |
|            |         |         | 106Tone | RU54     | 21.920        | 6844.640 | 6866.560 | PASS    |
|            | Ant1    | 6855    | 26Tone  | RU8      | 20.680        | 6845.760 | 6866.440 | PASS    |
|            |         |         | 52Tone  | RU40     | 20.960        | 6845.640 | 6866.600 | PASS    |
|            |         |         | 106Tone | RU54     | 21.360        | 6845.320 | 6866.680 | PASS    |
|            | Ant0    | 6875    | 26Tone  | RU0      | 20.960        | 6863.440 | 6884.400 | PASS    |
|            |         |         | 52Tone  | RU37     | 22.080        | 6862.920 | 6885.000 | PASS    |
|            |         |         | 106Tone | RU53     | 22.240        | 6863.080 | 6885.320 | PASS    |


|  |      |      |         |      |        |          |          |      |
|--|------|------|---------|------|--------|----------|----------|------|
|  | Ant1 | 6875 | 26Tone  | RU0  | 21.000 | 6863.360 | 6884.360 | PASS |
|  |      |      | 52Tone  | RU37 | 21.600 | 6863.080 | 6884.680 | PASS |
|  |      |      | 106Tone | RU53 | 21.880 | 6863.200 | 6885.080 | PASS |
|  | Ant0 | 7015 | 26Tone  | RU4  | 18.960 | 7005.600 | 7024.560 | PASS |
|  |      |      | 52Tone  | RU38 | 19.880 | 7005.200 | 7025.080 | PASS |
|  |      |      | 106Tone | RU53 | 22.560 | 7002.840 | 7025.400 | PASS |
|  | Ant1 | 7015 | 26Tone  | RU4  | 18.640 | 7005.760 | 7024.400 | PASS |
|  |      |      | 52Tone  | RU38 | 19.160 | 7005.560 | 7024.720 | PASS |
|  |      |      | 106Tone | RU53 | 21.560 | 7003.560 | 7025.120 | PASS |
|  | Ant0 | 7115 | 26Tone  | RU8  | 21.040 | 7105.640 | 7126.680 | PASS |
|  |      |      | 52Tone  | RU40 | 21.280 | 7105.200 | 7126.480 | PASS |
|  |      |      | 106Tone | RU54 | 21.800 | 7104.720 | 7126.520 | PASS |
|  | Ant1 | 7115 | 26Tone  | RU8  | 20.720 | 7105.720 | 7126.440 | PASS |
|  |      |      | 52Tone  | RU40 | 20.760 | 7105.560 | 7126.320 | PASS |
|  |      |      | 106Tone | RU54 | 21.320 | 7105.320 | 7126.640 | PASS |

## 11.1.2. Test Graphs-Indoor Client




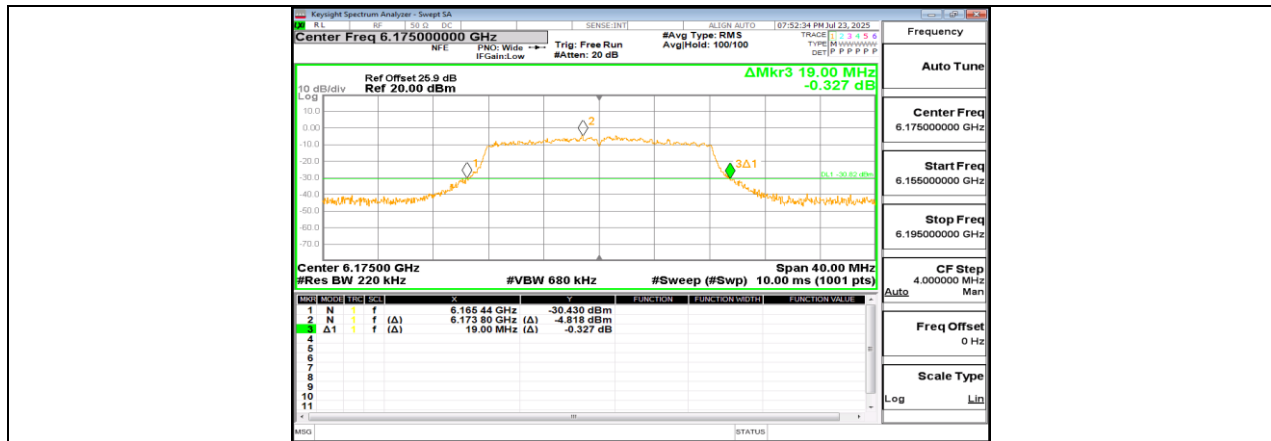


11A-CDD Ant1 6175

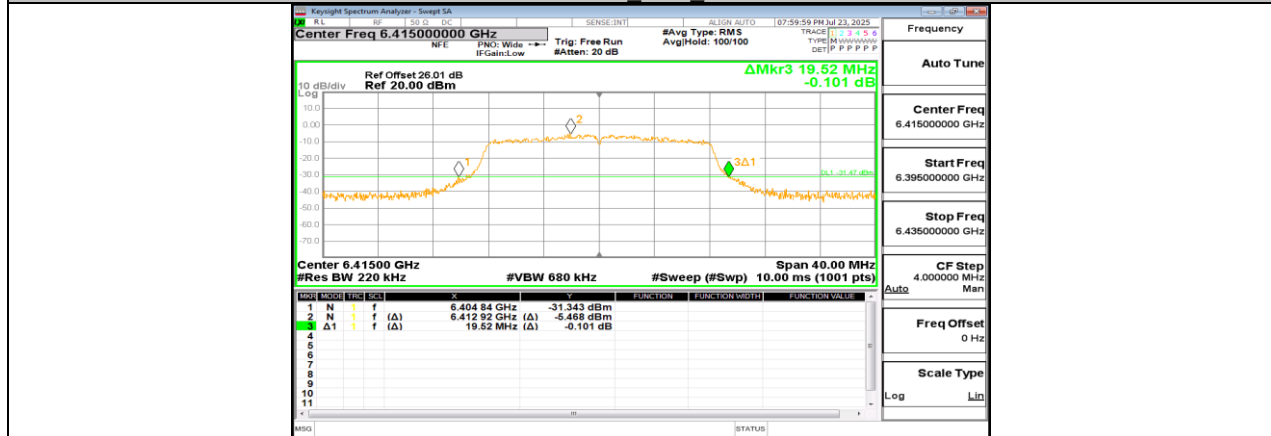

11A-CDD Ant0 6415

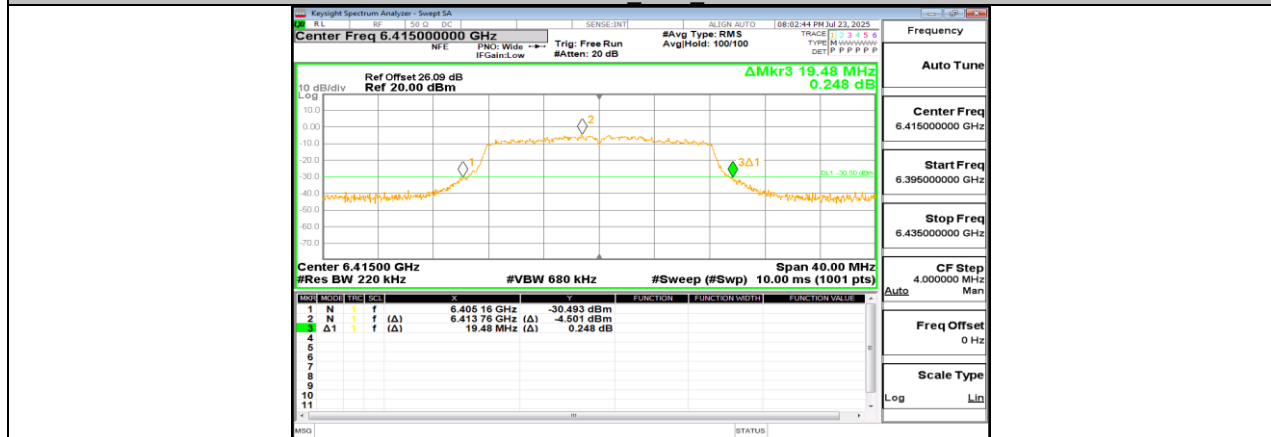

11A-CDD Ant1 6415

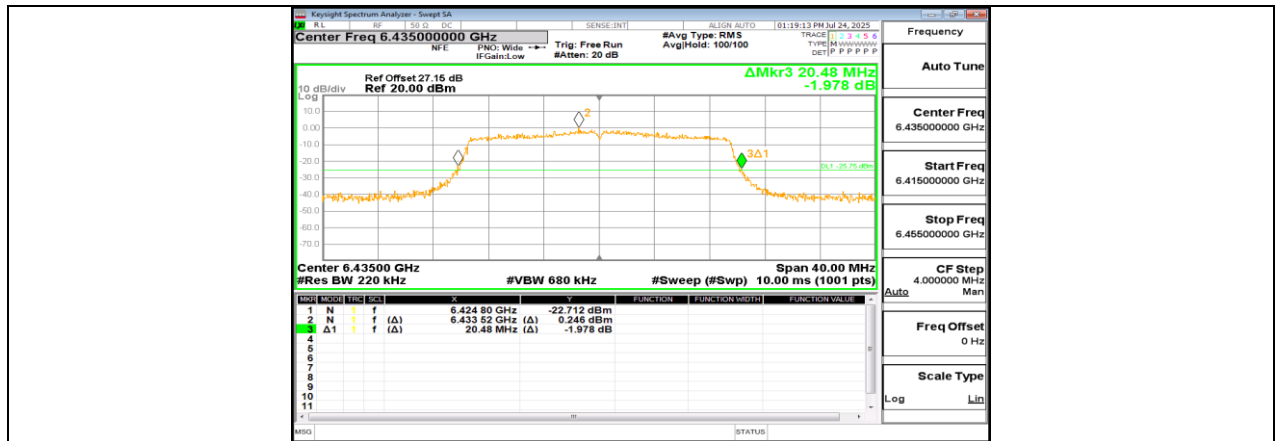




11A-CDD Ant0 6435




11A-CDD Ant1 6435



11A-CDD Ant0 6475

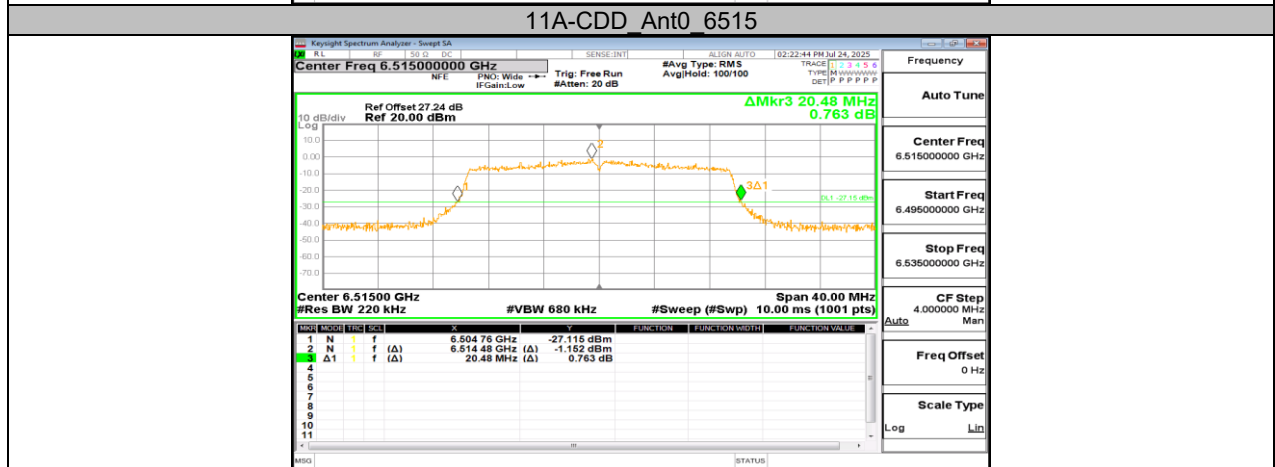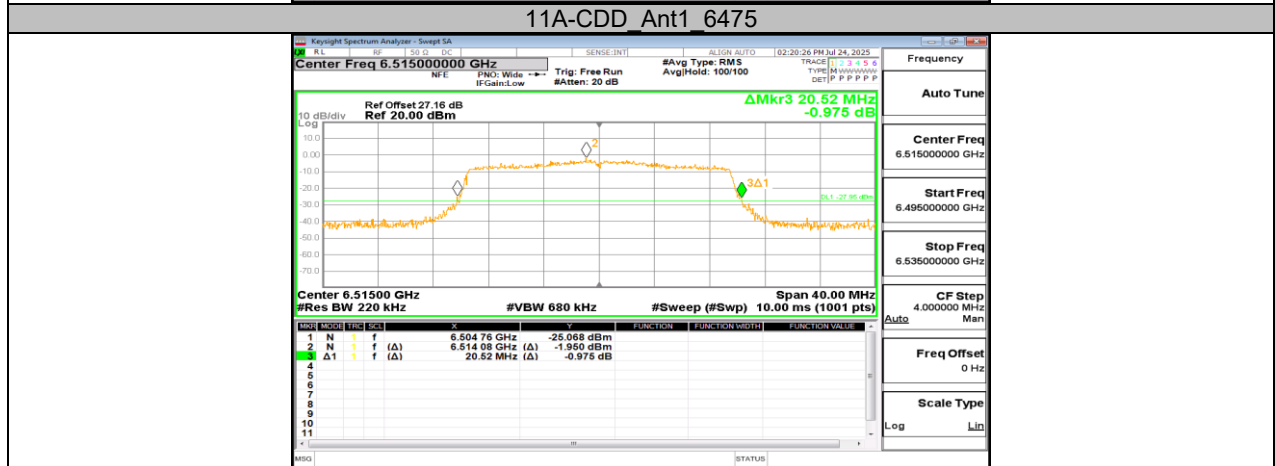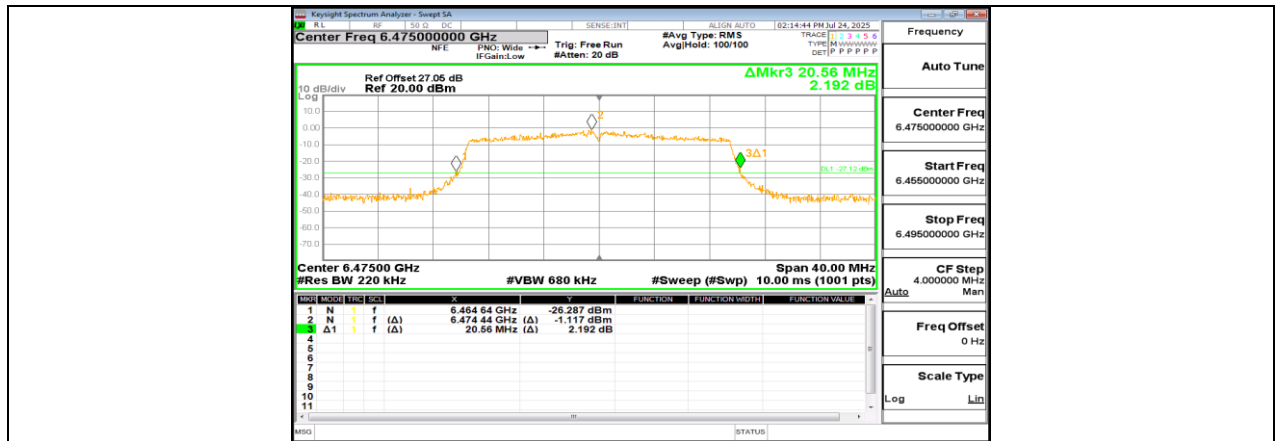


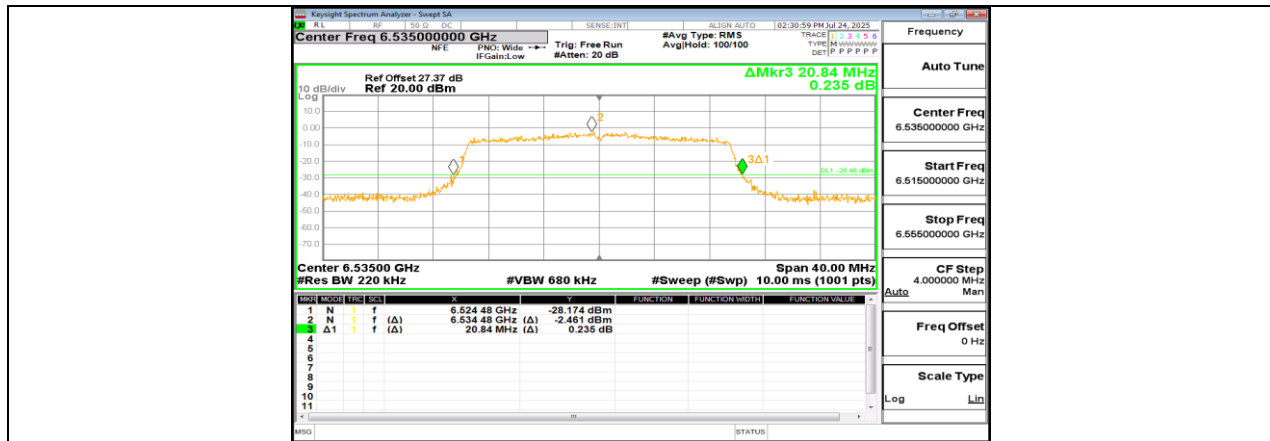

11A-CDD Ant0 6535



11A-CDD Ant1 6535

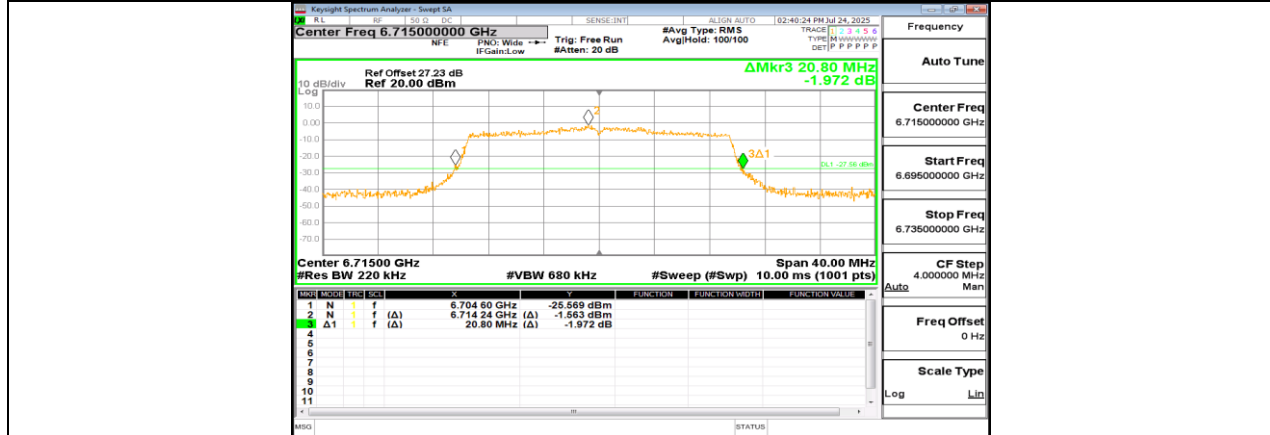

11A-CDD Ant0 6715