

Datalogic S.r.l.

Via San Vitalino 13
40012 Calderara di Reno (BO)
Italy
Tel. +39 051 3147011
Fax +39 051 3147205

©2025 Datalogic S.p.A. and/or its affiliates

All rights reserved. Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, or for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates.

Owners of Datalogic products are hereby granted a non-exclusive, revocable license to reproduce and transmit this documentation for the purchaser's own internal business purposes. Purchaser shall not remove or alter any proprietary notices, including copyright notices, contained in this documentation and shall ensure that all notices appear on any reproductions of the documentation.

Electronic versions of this document may be downloaded from the Datalogic website (www.datalogic.com). If you visit our website and would like to make comments or suggestions about this or other Datalogic publications, please let us know via the "Contact" page.

Disclaimer

Datalogic has taken reasonable measures to provide information in this manual that is complete and accurate, however, Datalogic shall not be liable for technical or editorial errors or omissions contained herein, nor for incidental or consequential damages resulting from the use of this material. Datalogic reserves the right to change any specification at any time without prior notice.

Trademarks

Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.

The Joya logo is a trademark of Datalogic S.p.A. and/or its affiliates, registered in the U.S. and the E.U. All other trademarks and brands are property of their respective owners.

Support Through the Website

Datalogic provides several services as well as technical support through its website.

Log on to www.datalogic.com.

For quick access, from the home page click on the search icon , and type in the name of the product you're looking for. This allows you access to download Data Sheets, Manuals, Software & Utilities, and Drawings.

Hover over the Support & Service menu for access to Services and Technical Support.

JOYA™ SMART

QUICK START GUIDE



DATALOGIC

3-Slot Dock Wireless Charging
MODEL: JTSMSD

Warranty Terms and Conditions

Refer to the Joya Smart User's Manual, downloadable from our website.

Read the following QR code for quick access to the product page. This allows you access to download Data Sheets, Manuals, Software & Utilities, and Drawings.



www.datalogic.com



822004900 (Rev. X2) July 2025

OUT OF THE BOX

The Joya Smart 3-Slot Dock Wireless Charging package contains:

- 3-Slot Dock Wireless Charging
- Unlock Key
- Quick Start Guide
- Safety & Regulatory Addendum.


Remove all the components from their packaging; check their integrity and compare them with all the packing documents.




CAUTION: Keep the original packaging for use when sending products to the technical assistance center. Damage caused by improper packaging is not covered under the warranty.

GENERAL VIEW

Top View

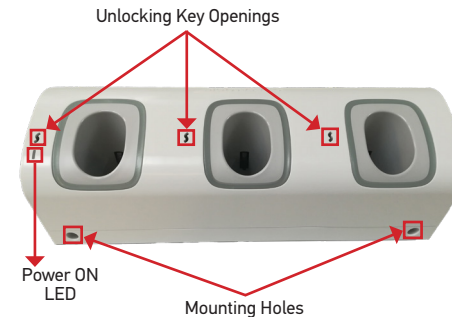


Bottom View

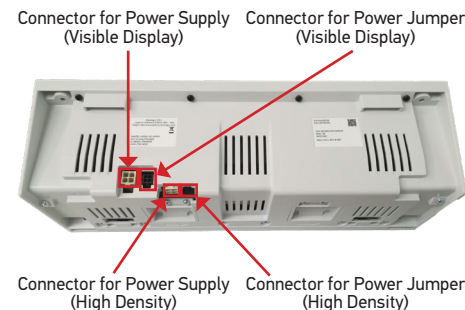


INSTALL THE DOCK

There are basically two different solutions organizing the disposition of the devices:

- Visible Display Configuration

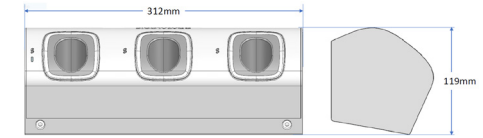

- High Density Configuration



NOTE: For further information on the 3-Slot Dock Wireless Charging, refer to the Wall Mount Bracket Installation Guide, downloadable from our website www.datalogic.com.

POWER THE DOCK

There are two options to connect the dock to the power supply: fast charge and standard charge.

Fast Charge

The fast charge connection allows to power one dock with one power supply.

Plug the power supply cable into the power connector on the back of the dock, then plug the power supply into the AC/DC plug using a Datalogic power cable. See below two examples of how to insert the power supply cable through the wall mounting metal bracket.



Visible Display



High Density

Standard Charge

The standard charge connection allows to power up to three docks with one power supply.
To connect an additional dock use the Joya Smart Power Jumper, available as optional accessory (P/N 91ACC0049).

- 1. Connect the power supply to the first dock.
- 2. Connect the additional docks using the power jumper.
- 3. Plug the power supply into the AC/DC plug using a Datalogic power cable.



CAUTION: Use only the Datalogic power supply 94ACC0380 to power the 3-Slot Dock.

NOTE: Under the same conditions, the fast charge connection can charge the battery up to twice as fast as the standard charge connection.

INSERT THE DEVICE INTO THE DOCK

Insert the device into the dock with the screen facing front.



To confirm the correct insertion, the battery charger LED starts blinking.

NOTE: The Joya Smart gets warm during charging. This is normal and does not mean a malfunction.



CAUTION: Do not put any foreign object such as, but not limited to, coins, paper clips, stickers inside the slots of the dock (see the picture below).



REMOVE THE DEVICE FROM THE DOCK

The Joya Smart 3-Slot Dock Wireless Charging can be unlocked using the unlock key provided with the dock or by software sending an unlock command from the inserted device (see the Joya Smart user's manual or the SDK documentation).

To locally unlock the dock and remove the Joya Smart:

- 1. Insert the unlock key into the opening and gently press it all the way down.



- 2. Remove the Joya Smart while keeping the unlock key pressed.



TECHNICAL SPECIFICATIONS

Mechanical Features	
Dimensions	312x121x110mm/ 12.28x4.76x4.33in
Weight	1422 g/ 50.16 oz
Eletrical Features	
Consumption	12VDC 7A
Indicators	TBD
Charge Time	Fast charge: 3h Standard charge: 7h
Environmental Features	
Operating Temperature*	-10° to 50°C
Storage Temperature	-20 to 70°C
Humidity**	95% non condensing for tem- peratures < 40 °C

LED INDICATORS

TBD

* The Joya Smart should be charged at an ambient temperature between 0 and 35° C to achieve the maximum charging rate. Never charge the main device in a closed space where excessive heat can build up. Close to the limits of the working temperature, some display and/or battery performance degradation may occur.

** Multiple rapid humidity and/or temperature variations may cause condensing.