



Plots of EUT ceased transmission in the time domain

6G_UNII7_BW320_CH127_6585MHz_TRS

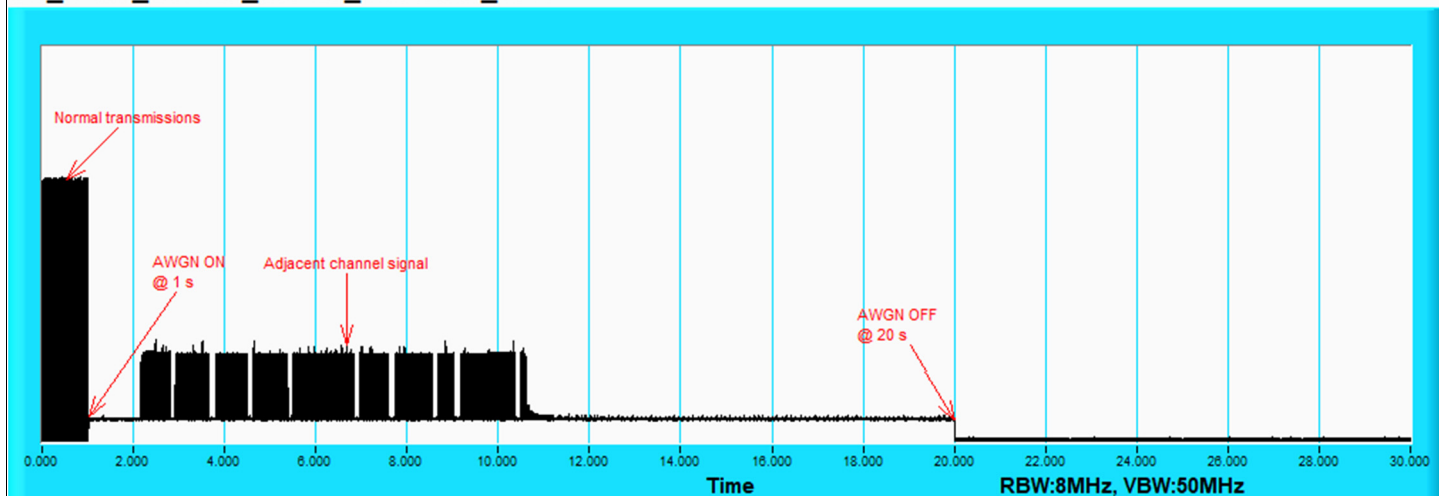


802.11be (HE320) / CH127(Low Edge)

6G_UNII7_BW320_CH127_6740MHz_TRS

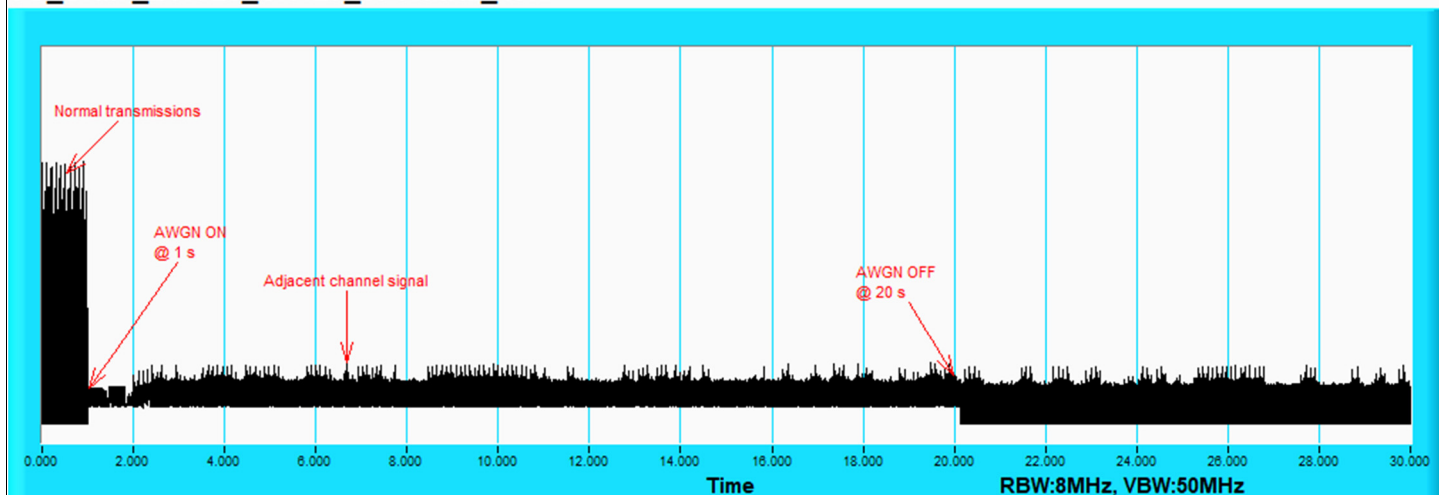

802.11be (HE320) / CH127(Middle)

6G_UNII7_BW320_CH127_6430MHz_TRS

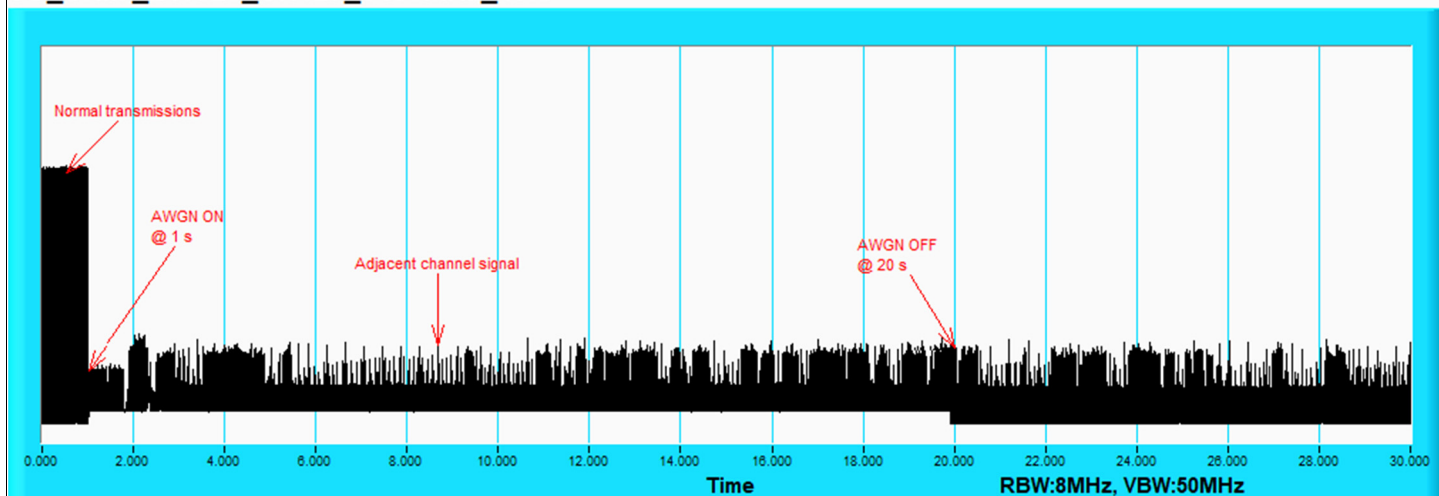

802.11be (HE320) / CH127(High Edge)

For U-NII-8


Contention Based Protocol Measurement										
Operation Mode	Channel Bandwidth (MHz)	Channel Number	Channel Freq. (MHz)	Injected Signal (AWGN)		Antenna Gain (dBi)	Path Loss (dB) (Note 3)	Adjusted Power (dBm)	Detection Limit	EUT TX Status
				Freq. (MHz)	Power (dBm)					
802.11be	20	193	6915	6915	-62.26	3	0	-65.26	-62	OFF
					-62.76	3	0	-65.76	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
	320	191	6750	6750	-62.31	3	0	-65.31	-62	OFF
					-62.81	3	0	-65.81	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
			6905	6905	-62.24	3	0	-65.24	-62	OFF
					-62.74	3	0	-65.74	-62	Minimal
					-79.6	3	0	-82.6	-62	ON
			7060	7060	-62.22	3	0	-65.22	-62	OFF
					-62.72	3	0	-65.72	-62	Minimal
					-79.6	3	0	-82.6	-62	ON

Notes:


1. After investigation (consider antenna gain and path loss) , the one representative port (Chain 0) was measured and presented in the report.
2. Adjusted Power (dBm) = Injected Signal (AWGN) Power (dBm) - Antenna Gain (dBi) + Path Loss (dB)
3. Antenna gain values include all the applicable path losses.
4. This device does not use the channel puncturing and bandwidth reduction mechanisms for incumbent avoidance, but instead switches to other channels to perform its function.

Contention Based Protocol Detection Probability															
Operation Mode	Channel Bandwidth (MHz)	AWGN Signal Freq. (MHz)	#01	#02	#03	#04	#05	#06	#07	#08	#09	#10	Detection Probability	Detection Limit	Test Result
802.11be	20	6915	v	v	v	v	v	v	v	v	v	v	100%	90%	Pass
	320	6750	v	v	v	v	v	x	v	v	v	v	90%	90%	Pass
		6905	v	v	v	v	v	v	v	v	x	v	90%	90%	Pass
		7060	v	v	v	v	x	v	v	v	v	v	90%	90%	Pass


Plots of EUT Tx waveform

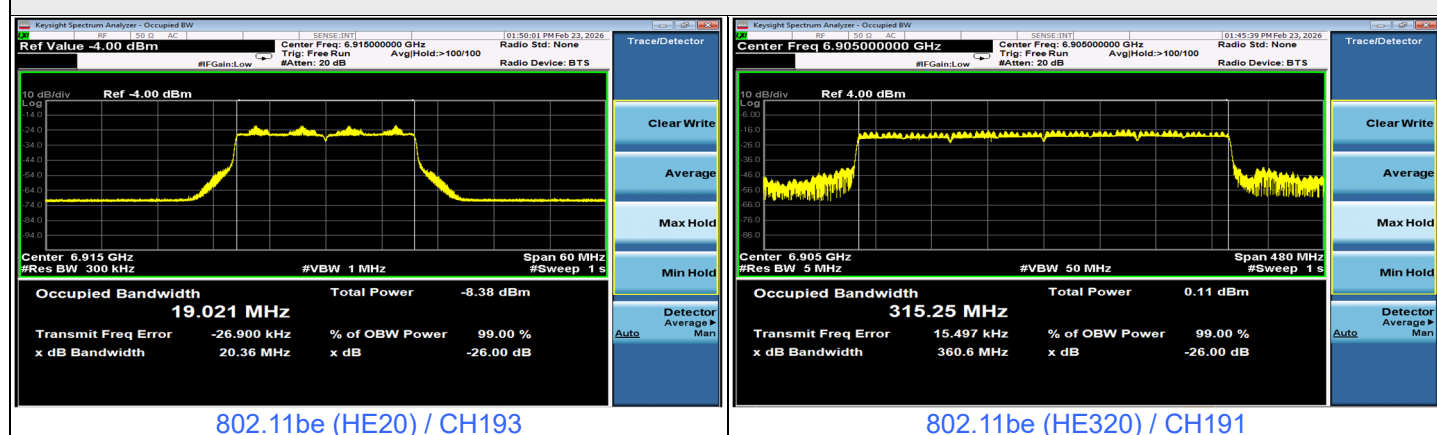


Plots of Injected signal (AWGN) level

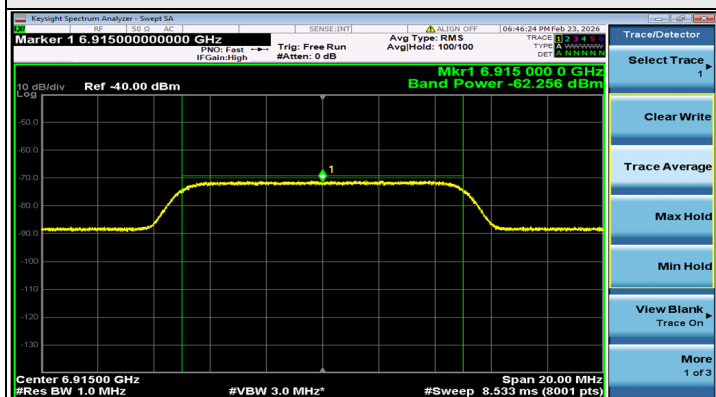


802.11be (HE20) / CH193

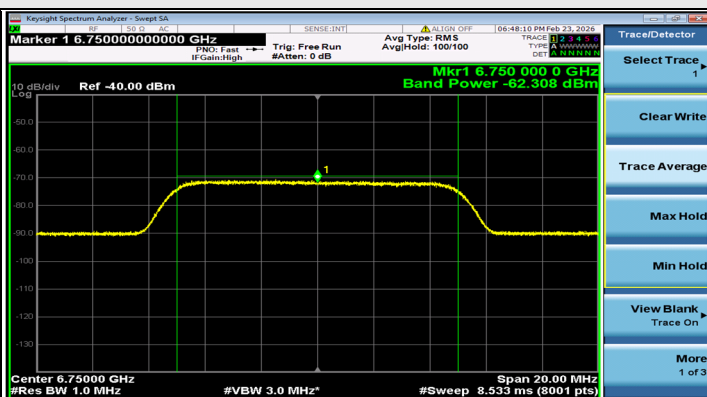

802.11be (HE320) / CH191(Low Edge)

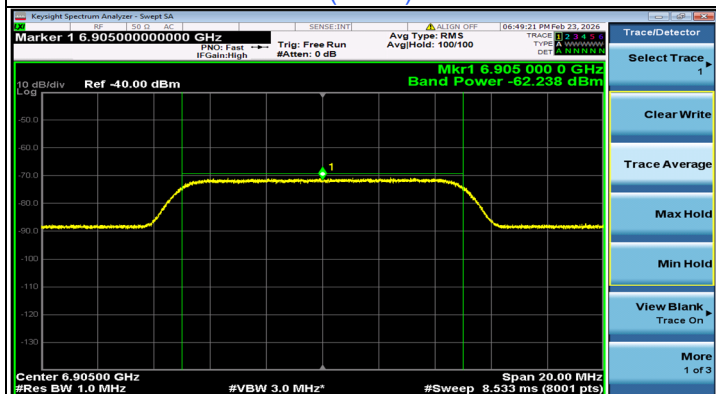


802.11be (HE320) / CH191(Middle)

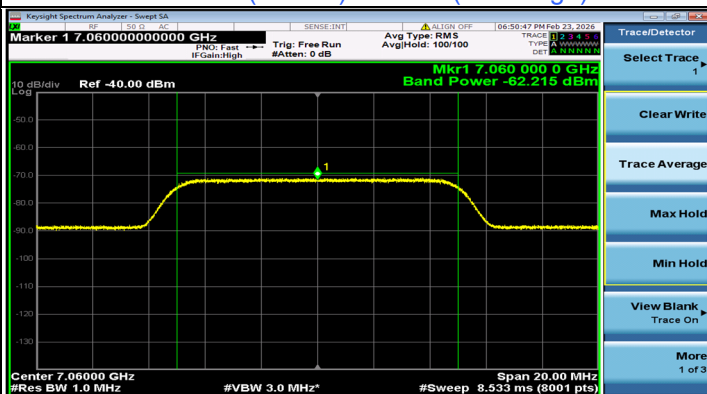

802.11be (HE320) / CH191(High Edge)

Plots of EUT ceased transmission in the time domain


6G_UNII8_BW20_CH193_6915MHz_TRS

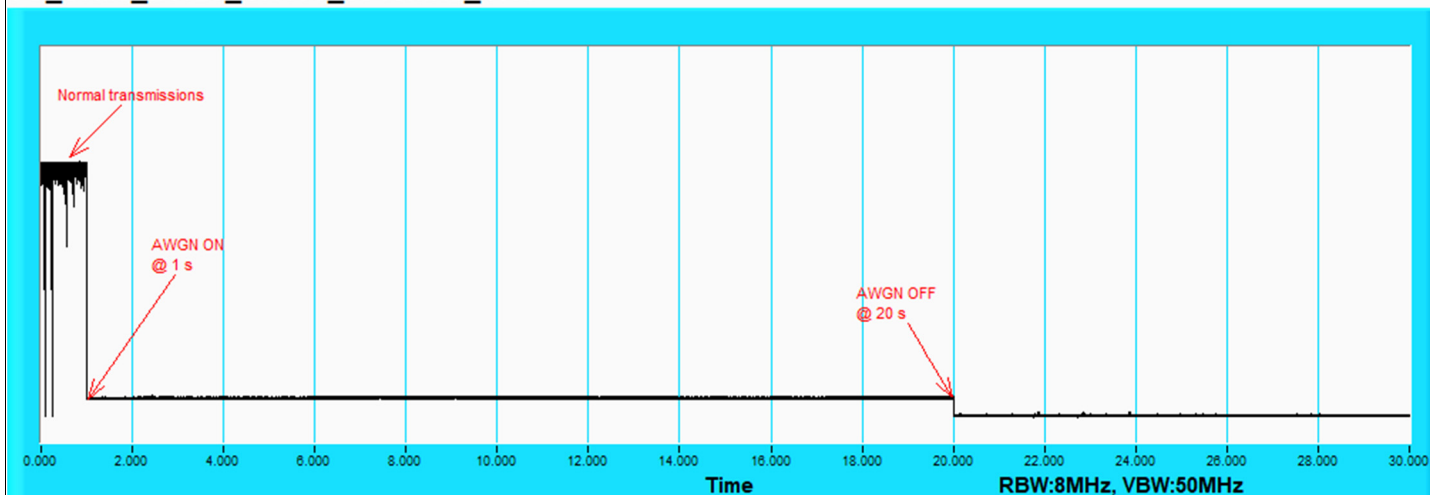

802.11be (HE20) / CH193


Plots of EUT ceased transmission in the time domain

6G_UNII8_BW320_CH191_6750MHz_TRS

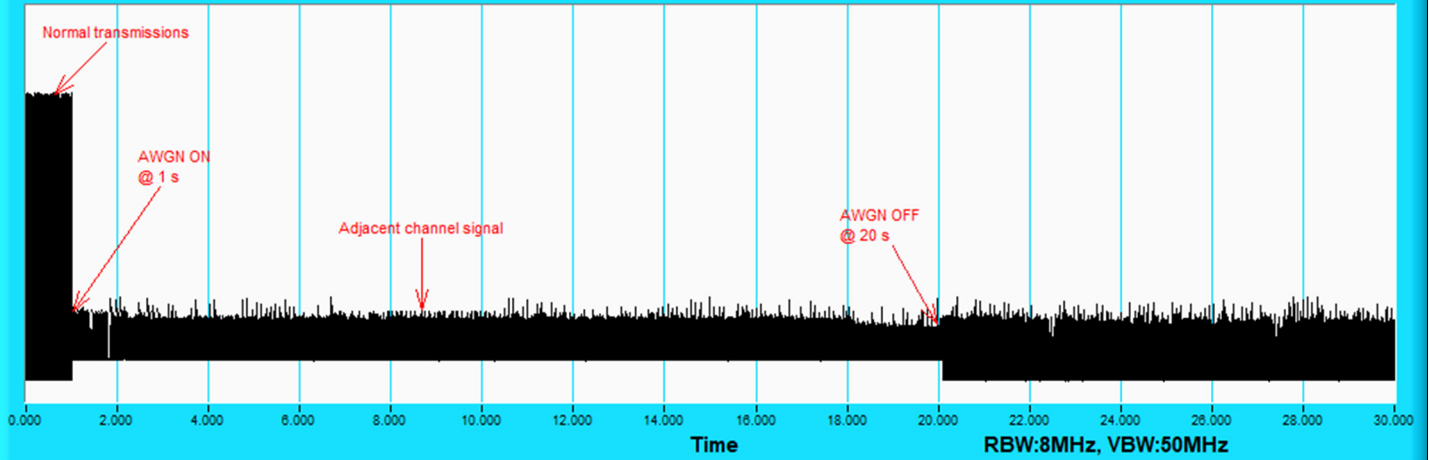


802.11be (HE320) / CH191(Low Edge)

6G_UNII8_BW320_CH191_6905MHz_TRS

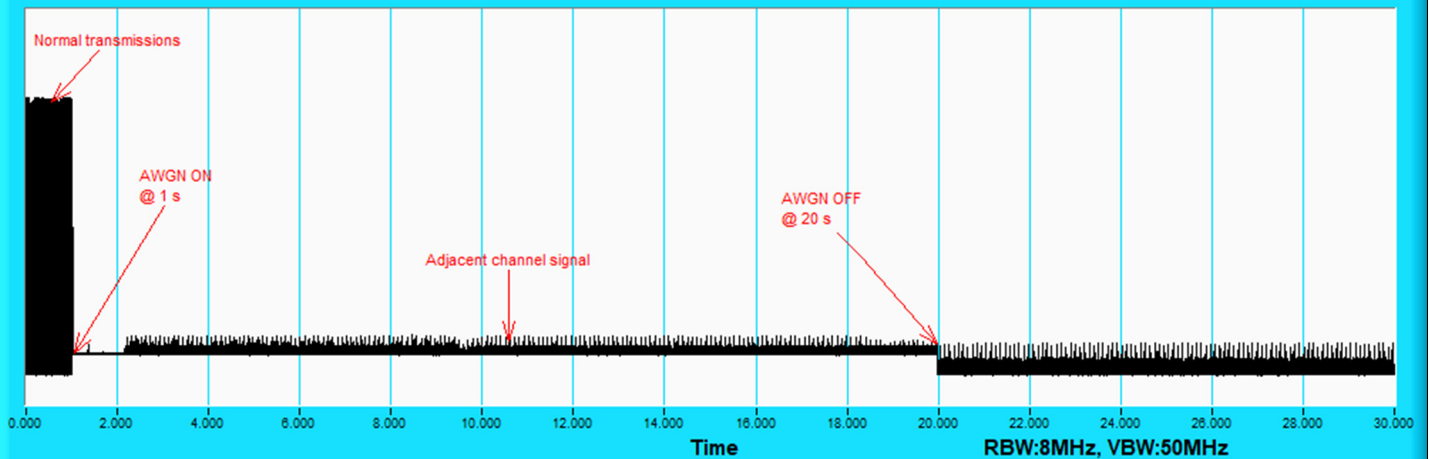

802.11be (HE320) / CH191(Middle)

6G_UNII8_BW320_CH191_7060MHz_TRS

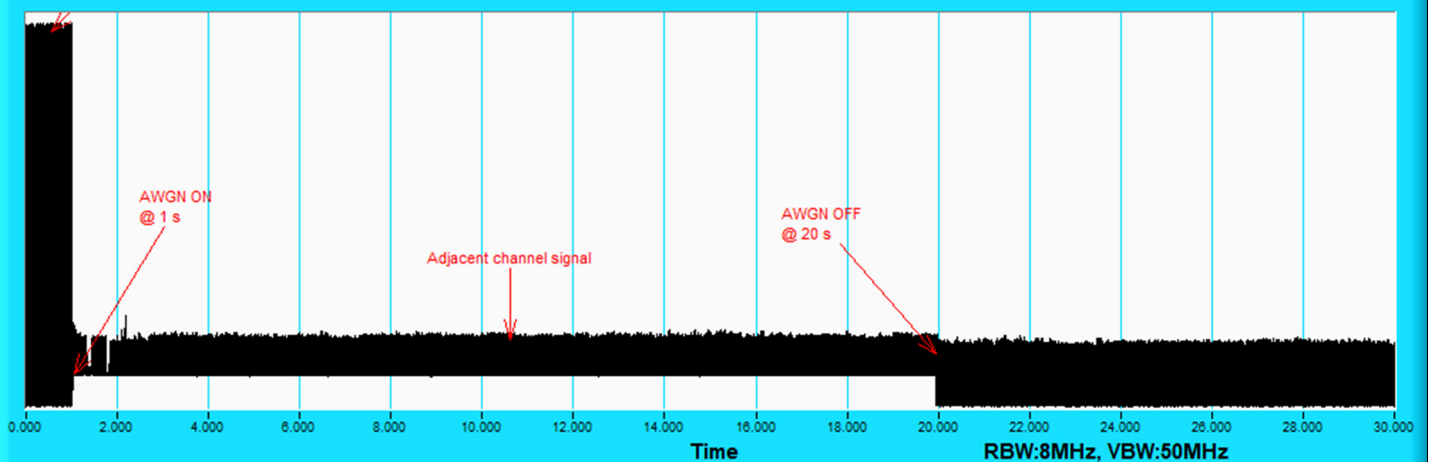

802.11be (HE320) / CH191(High Edge)


7.7 AC Power Conducted Emissions

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.68	33.55	14.37	43.23	24.05	65.57	55.57	-22.34	-31.52
2	0.22600	9.71	29.71	16.46	39.42	26.17	62.60	52.60	-23.18	-26.43
3	0.40180	9.70	28.78	22.79	38.48	32.49	57.82	47.82	-19.34	-15.33
4	0.57000	9.71	15.87	9.37	25.58	19.08	56.00	46.00	-30.42	-26.92
5	3.56600	9.81	22.19	15.63	32.00	25.44	56.00	46.00	-24.00	-20.56
6	7.15000	9.84	28.69	22.71	38.53	32.55	60.00	50.00	-21.47	-17.45

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

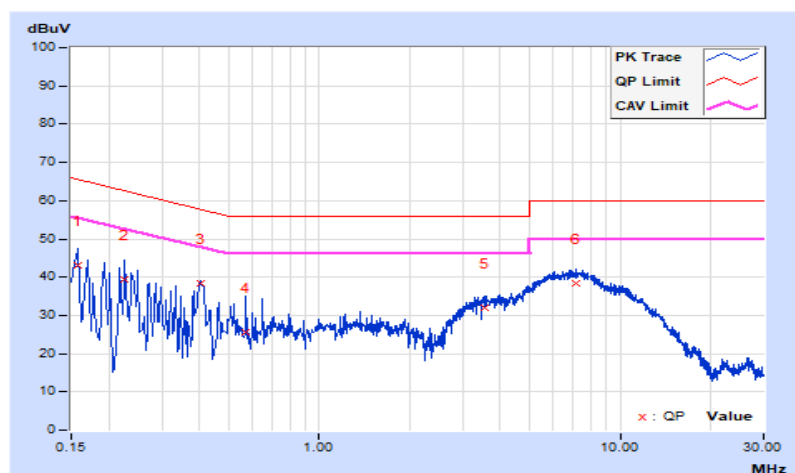


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17400	9.66	35.10	17.58	44.76	27.24	64.77	54.77	-20.01	-27.53
2	0.19780	9.66	31.64	15.35	41.30	25.01	63.70	53.70	-22.40	-28.69
3	0.27000	9.68	24.02	10.46	33.70	20.14	61.12	51.12	-27.42	-30.98
4	0.41000	9.71	26.18	20.47	35.89	30.18	57.65	47.65	-21.76	-17.47
5	3.54200	9.82	20.10	12.74	29.92	22.56	56.00	46.00	-26.08	-23.44
6	7.25000	9.86	27.98	22.30	37.84	32.16	60.00	50.00	-22.16	-17.84

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

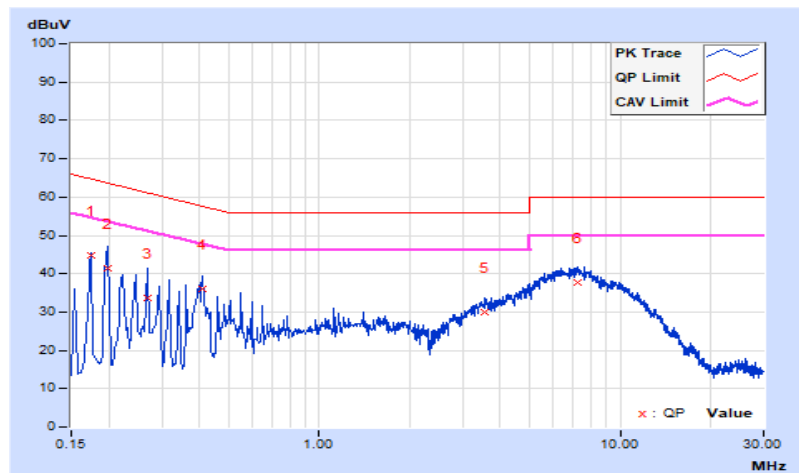


7.8 Unwanted Emissions below 1 GHz

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	241.46	25.4 QP	46.0	-20.6	1.50 H	228	39.7	-14.3
2	279.29	26.5 QP	46.0	-19.5	1.25 H	146	39.3	-12.8
3	340.40	31.5 QP	46.0	-14.5	1.00 H	223	42.9	-11.4
4	399.57	37.6 QP	46.0	-8.4	2.00 H	206	47.5	-9.9
5	799.21	30.2 QP	46.0	-15.8	1.25 H	62	32.3	-2.1
6	924.34	31.9 QP	46.0	-14.1	1.00 H	27	31.9	0.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

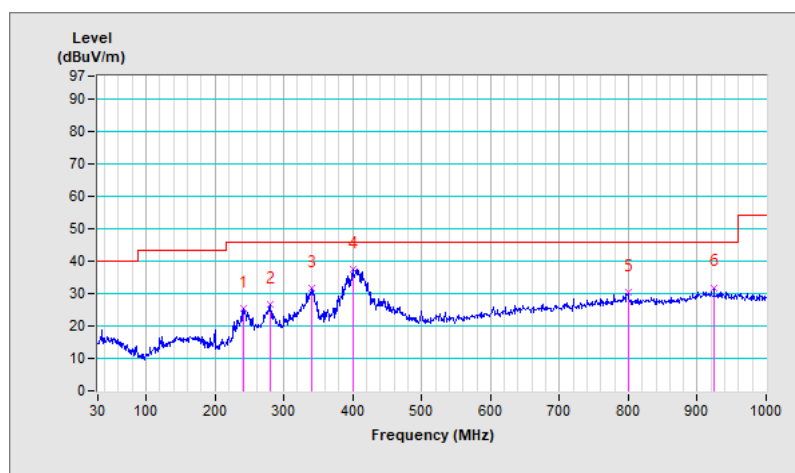


RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	30.8 QP	40.0	-9.2	1.25 V	89	44.9	-14.1
2	232.73	20.7 QP	46.0	-25.3	1.00 V	151	35.7	-15.0
3	274.44	22.0 QP	46.0	-24.0	1.50 V	191	35.0	-13.0
4	343.31	27.3 QP	46.0	-18.7	1.25 V	149	38.7	-11.4
5	407.33	39.4 QP	46.0	-6.6	1.00 V	139	49.2	-9.8
6	915.61	30.3 QP	46.0	-15.7	1.50 V	327	30.5	-0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

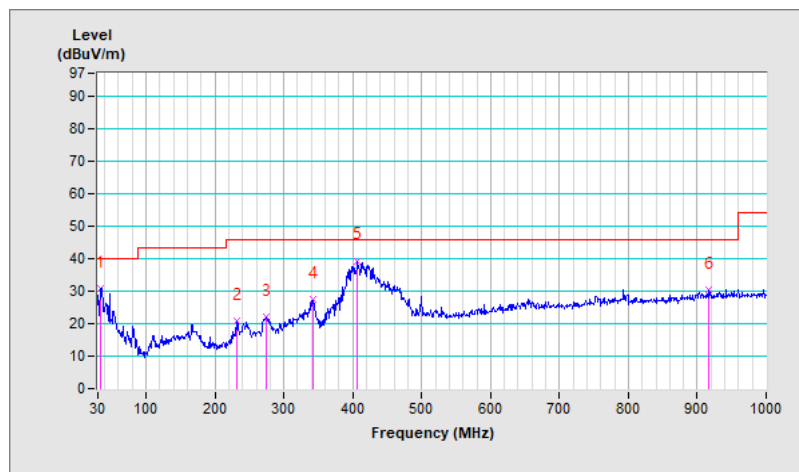

7.9 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.0 PK	88.2	-35.2	3.14 H	40	47.2	5.8
2	#5925.00	40.8 AV	68.2	-27.4	3.14 H	40	35.0	5.8
3	*5955.00	102.4 PK			3.14 H	40	58.7	43.7
4	*5955.00	90.6 AV			3.14 H	40	46.9	43.7
5	11910.00	58.4 PK	74.0	-15.6	1.53 H	159	47.2	11.2
6	11910.00	45.3 AV	54.0	-8.7	1.53 H	159	34.1	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	53.8 PK	88.2	-34.4	1.69 V	333	48.0	5.8
2	#5925.00	40.0 AV	68.2	-28.2	1.69 V	333	34.2	5.8
3	*5955.00	109.6 PK			1.69 V	333	65.9	43.7
4	*5955.00	98.4 AV			1.69 V	333	54.7	43.7
5	11910.00	58.8 PK	74.0	-15.2	2.09 V	19	47.6	11.2
6	11910.00	46.7 AV	54.0	-7.3	2.09 V	19	35.5	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	101.4 PK			3.11 H	38	56.3	45.1
2	*6175.00	88.4 AV			3.11 H	38	43.3	45.1
3	12350.00	59.4 PK	74.0	-14.6	1.63 H	160	47.6	11.8
4	12350.00	46.3 AV	54.0	-7.7	1.63 H	160	34.5	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	108.2 PK			1.62 V	329	63.1	45.1
2	*6175.00	97.9 AV			1.62 V	329	52.8	45.1
3	12350.00	59.8 PK	74.0	-14.2	2.19 V	24	48.0	11.8
4	12350.00	47.7 AV	54.0	-6.3	2.19 V	24	35.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	103.2 PK			3.01 H	22	56.6	46.6
2	*6415.00	90.5 AV			3.01 H	22	43.9	46.6
3	#12830.00	60.2 PK	88.2	-28.0	1.56 H	162	47.9	12.3
4	#12830.00	48.2 AV	68.2	-20.0	1.56 H	162	35.9	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.1 PK			1.70 V	311	63.5	46.6
2	*6415.00	99.6 AV			1.70 V	311	53.0	46.6
3	#12830.00	60.8 PK	88.2	-27.4	2.10 V	26	48.5	12.3
4	#12830.00	48.8 AV	68.2	-19.4	2.10 V	26	36.5	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.7 PK			3.00 H	19	56.1	46.6
2	*6435.00	89.8 AV			3.00 H	19	43.2	46.6
3	#12870.00	60.6 PK	88.2	-27.6	1.51 H	149	48.3	12.3
4	#12870.00	48.2 AV	68.2	-20.0	1.51 H	149	35.9	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	109.2 PK			1.61 V	209	62.6	46.6
2	*6435.00	98.5 AV			1.61 V	209	51.9	46.6
3	#12870.00	61.1 PK	88.2	-27.1	2.05 V	25	48.8	12.3
4	#12870.00	49.0 AV	68.2	-19.2	2.05 V	25	36.7	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.8 PK			3.02 H	31	57.2	46.6
2	*6475.00	91.2 AV			3.02 H	31	44.6	46.6
3	#12950.00	60.3 PK	88.2	-27.9	1.49 H	160	48.2	12.1
4	#12950.00	47.9 AV	68.2	-20.3	1.49 H	160	35.8	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.1 PK			1.59 V	331	63.5	46.6
2	*6475.00	98.6 AV			1.59 V	331	52.0	46.6
3	#12950.00	60.8 PK	88.2	-27.4	2.01 V	18	48.7	12.1
4	#12950.00	48.5 AV	68.2	-19.7	2.01 V	18	36.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	104.4 PK			3.07 H	29	57.6	46.8
2	*6515.00	91.8 AV			3.07 H	29	45.0	46.8
3	#13030.00	60.2 PK	88.2	-28.0	1.51 H	159	48.4	11.8
4	#13030.00	47.7 AV	68.2	-20.5	1.51 H	159	35.9	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.0 PK			1.67 V	326	65.2	46.8
2	*6515.00	99.4 AV			1.67 V	326	52.6	46.8
3	#13030.00	60.7 PK	88.2	-27.5	1.99 V	26	48.9	11.8
4	#13030.00	48.4 AV	68.2	-19.8	1.99 V	26	36.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	104.0 PK			2.93 H	21	56.9	47.1
2	*6535.00	91.5 AV			2.93 H	21	44.4	47.1
3	#13070.00	60.1 PK	88.2	-28.1	1.60 H	155	48.5	11.6
4	#13070.00	47.8 AV	68.2	-20.4	1.60 H	155	36.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	109.9 PK			1.57 V	333	62.8	47.1
2	*6535.00	99.0 AV			1.57 V	333	51.9	47.1
3	#13070.00	60.6 PK	88.2	-27.6	2.06 V	30	49.0	11.6
4	#13070.00	48.3 AV	68.2	-19.9	2.06 V	30	36.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.7 PK			3.07 H	9	56.5	47.2
2	*6695.00	91.3 AV			3.07 H	9	44.1	47.2
3	13390.00	60.7 PK	74.0	-13.3	1.61 H	160	48.6	12.1
4	13390.00	48.7 AV	54.0	-5.3	1.61 H	160	36.6	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.0 PK			1.68 V	327	62.8	47.2
2	*6695.00	99.2 AV			1.68 V	327	52.0	47.2
3	13390.00	61.4 PK	74.0	-12.6	1.93 V	22	49.3	12.1
4	13390.00	49.0 AV	54.0	-5.0	1.93 V	22	36.9	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	104.1 PK			3.11 H	29	57.0	47.1
2	*6855.00	91.2 AV			3.11 H	29	44.1	47.1
3	#13710.00	60.1 PK	88.2	-28.1	1.56 H	151	48.7	11.4
4	#13710.00	47.5 AV	68.2	-20.7	1.56 H	151	36.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.3 PK			1.64 V	326	63.2	47.1
2	*6855.00	98.9 AV			1.64 V	326	51.8	47.1
3	#13710.00	60.6 PK	88.2	-27.6	2.12 V	31	49.2	11.4
4	#13710.00	48.3 AV	68.2	-19.9	2.12 V	31	36.9	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.5 PK			2.99 H	33	56.2	47.3
2	*6875.00	90.8 AV			2.99 H	33	43.5	47.3
3	#13750.00	60.6 PK	88.2	-27.6	1.59 H	161	49.2	11.4
4	#13750.00	47.9 AV	68.2	-20.3	1.59 H	161	36.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.3 PK			1.49 V	27	63.0	47.3
2	*6875.00	98.2 AV			1.49 V	27	50.9	47.3
3	#13750.00	60.9 PK	88.2	-27.3	2.01 V	22	49.5	11.4
4	#13750.00	48.5 AV	68.2	-19.7	2.01 V	22	37.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	104.5 PK			3.06 H	12	57.1	47.4
2	*6995.00	91.7 AV			3.06 H	12	44.3	47.4
3	#13990.00	61.6 PK	88.2	-26.6	1.53 H	162	49.5	12.1
4	#13990.00	48.7 AV	68.2	-19.5	1.53 H	162	36.6	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.5 PK			1.46 V	25	63.1	47.4
2	*6995.00	98.8 AV			1.46 V	25	51.4	47.4
3	#13990.00	62.3 PK	88.2	-25.9	2.09 V	19	50.2	12.1
4	#13990.00	49.6 AV	68.2	-18.6	2.09 V	19	37.5	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.5 PK			2.92 H	1	53.6	47.9
2	*7115.00	90.4 AV			2.92 H	1	42.5	47.9
3	#7125.00	75.9 PK	88.2	-12.3	2.92 H	1	66.1	9.8
4	#7125.00	60.3 AV	68.2	-7.9	2.92 H	1	50.5	9.8
5	#14230.00	61.2 PK	88.2	-27.0	1.55 H	163	49.2	12.0
6	#14230.00	48.7 AV	68.2	-19.5	1.55 H	163	36.7	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	107.7 PK			1.34 V	24	59.8	47.9
2	*7115.00	97.5 AV			1.34 V	24	49.6	47.9
3	#7125.00	83.8 PK	88.2	-4.4	1.34 V	24	74.0	9.8
4	#7125.00	67.6 AV	68.2	-0.6	1.34 V	24	57.8	9.8
5	#14230.00	61.7 PK	88.2	-26.5	2.00 V	12	49.7	12.0
6	#14230.00	49.5 AV	68.2	-18.7	2.00 V	12	37.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 1 : 5955 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	56.6 PK	88.2	-31.6	2.64 H	26	50.8	5.8
2	#5925.00	42.8 AV	68.2	-25.4	2.64 H	26	37.0	5.8
3	*5955.00	105.3 PK			2.64 H	26	61.6	43.7
4	*5955.00	92.9 AV			2.64 H	26	49.2	43.7
5	11910.00	58.0 PK	74.0	-16.0	1.72 H	147	46.8	11.2
6	11910.00	45.9 AV	54.0	-8.1	1.72 H	147	34.7	11.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	57.1 PK	88.2	-31.1	1.96 V	316	51.3	5.8
2	#5925.00	43.0 AV	68.2	-25.2	1.96 V	316	37.2	5.8
3	*5955.00	110.2 PK			1.96 V	316	66.5	43.7
4	*5955.00	97.9 AV			1.96 V	316	54.2	43.7
5	11910.00	58.8 PK	74.0	-15.2	2.26 V	21	47.6	11.2
6	11910.00	46.6 AV	54.0	-7.4	2.26 V	21	35.4	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 45 : 6175 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	106.3 PK			2.62 H	22	61.2	45.1
2	*6175.00	94.2 AV			2.62 H	22	49.1	45.1
3	12350.00	58.4 PK	74.0	-15.6	1.67 H	142	46.6	11.8
4	12350.00	46.2 AV	54.0	-7.8	1.67 H	142	34.4	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	111.7 PK			1.96 V	319	66.6	45.1
2	*6175.00	99.4 AV			1.96 V	319	54.3	45.1
3	12350.00	59.6 PK	74.0	-14.4	2.26 V	28	47.8	11.8
4	12350.00	47.5 AV	54.0	-6.5	2.26 V	28	35.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.1 PK			2.65 H	29	59.5	46.6
2	*6415.00	93.9 AV			2.65 H	29	47.3	46.6
3	#12830.00	59.1 PK	88.2	-29.1	1.73 H	138	46.8	12.3
4	#12830.00	46.8 AV	68.2	-21.4	1.73 H	138	34.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	111.3 PK			1.98 V	322	64.7	46.6
2	*6415.00	99.0 AV			1.98 V	322	52.4	46.6
3	#12830.00	59.8 PK	88.2	-28.4	2.18 V	34	47.5	12.3
4	#12830.00	47.7 AV	68.2	-20.5	2.18 V	34	35.4	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	106.3 PK			2.66 H	27	59.7	46.6
2	*6435.00	94.1 AV			2.66 H	27	47.5	46.6
3	#12870.00	59.0 PK	88.2	-29.2	1.66 H	145	46.7	12.3
4	#12870.00	46.8 AV	68.2	-21.4	1.66 H	145	34.5	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	111.4 PK			1.99 V	318	64.8	46.6
2	*6435.00	99.2 AV			1.99 V	318	52.6	46.6
3	#12870.00	59.7 PK	88.2	-28.5	2.21 V	36	47.4	12.3
4	#12870.00	47.5 AV	68.2	-20.7	2.21 V	36	35.2	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	109.0 PK			2.61 H	25	62.4	46.6
2	*6475.00	96.9 AV			2.61 H	25	50.3	46.6
3	#12950.00	58.7 PK	88.2	-29.5	1.77 H	141	46.6	12.1
4	#12950.00	46.4 AV	68.2	-21.8	1.77 H	141	34.3	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	114.2 PK			1.95 V	324	67.6	46.6
2	*6475.00	102.1 AV			1.95 V	324	55.5	46.6
3	#12950.00	59.7 PK	88.2	-28.5	2.17 V	33	47.6	12.1
4	#12950.00	47.5 AV	68.2	-20.7	2.17 V	33	35.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.3 PK			2.57 H	24	60.5	46.8
2	*6515.00	95.0 AV			2.57 H	24	48.2	46.8
3	#13030.00	58.6 PK	88.2	-29.6	1.73 H	148	46.8	11.8
4	#13030.00	46.4 AV	68.2	-21.8	1.73 H	148	34.6	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	112.5 PK			1.93 V	314	65.7	46.8
2	*6515.00	100.2 AV			1.93 V	314	53.4	46.8
3	#13030.00	59.2 PK	88.2	-29.0	2.14 V	37	47.4	11.8
4	#13030.00	47.1 AV	68.2	-21.1	2.14 V	37	35.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.5 PK			2.62 H	29	60.4	47.1
2	*6535.00	95.4 AV			2.62 H	29	48.3	47.1
3	#13070.00	58.3 PK	88.2	-29.9	1.68 H	139	46.7	11.6
4	#13070.00	46.1 AV	68.2	-22.1	1.68 H	139	34.5	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	112.6 PK			1.98 V	321	65.5	47.1
2	*6535.00	100.4 AV			1.98 V	321	53.3	47.1
3	#13070.00	58.9 PK	88.2	-29.3	2.23 V	35	47.3	11.6
4	#13070.00	46.7 AV	68.2	-21.5	2.23 V	35	35.1	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	108.0 PK			2.69 H	26	60.8	47.2
2	*6695.00	95.8 AV			2.69 H	26	48.6	47.2
3	13390.00	59.0 PK	74.0	-15.0	1.65 H	138	46.9	12.1
4	13390.00	46.7 AV	54.0	-7.3	1.65 H	138	34.6	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	113.0 PK			1.94 V	322	65.8	47.2
2	*6695.00	100.9 AV			1.94 V	322	53.7	47.2
3	13390.00	59.7 PK	74.0	-14.3	2.23 V	38	47.6	12.1
4	13390.00	47.4 AV	54.0	-6.6	2.23 V	38	35.3	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	106.5 PK			2.62 H	26	59.4	47.1
2	*6855.00	94.2 AV			2.62 H	26	47.1	47.1
3	#13710.00	58.1 PK	88.2	-30.1	1.69 H	145	46.7	11.4
4	#13710.00	45.9 AV	68.2	-22.3	1.69 H	145	34.5	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	111.4 PK			2.03 V	234	64.3	47.1
2	*6855.00	99.2 AV			2.03 V	234	52.1	47.1
3	#13710.00	58.7 PK	88.2	-29.5	2.16 V	32	47.3	11.4
4	#13710.00	46.5 AV	68.2	-21.7	2.16 V	32	35.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.7 PK			2.61 H	27	59.4	47.3
2	*6875.00	94.5 AV			2.61 H	27	47.2	47.3
3	#13750.00	58.2 PK	88.2	-30.0	1.64 H	137	46.8	11.4
4	#13750.00	46.2 AV	68.2	-22.0	1.64 H	137	34.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	111.7 PK			1.99 V	337	64.4	47.3
2	*6875.00	99.6 AV			1.99 V	337	52.3	47.3
3	#13750.00	58.7 PK	88.2	-29.5	2.23 V	39	47.3	11.4
4	#13750.00	46.7 AV	68.2	-21.5	2.23 V	39	35.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	106.6 PK			2.62 H	27	59.2	47.4
2	*6995.00	94.4 AV			2.62 H	27	47.0	47.4
3	#13990.00	58.8 PK	88.2	-29.4	1.71 H	140	46.7	12.1
4	#13990.00	46.5 AV	68.2	-21.7	1.71 H	140	34.4	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	111.6 PK			2.01 V	323	64.2	47.4
2	*6995.00	99.4 AV			2.01 V	323	52.0	47.4
3	#13990.00	59.5 PK	88.2	-28.7	2.26 V	31	47.4	12.1
4	#13990.00	47.3 AV	68.2	-20.9	2.26 V	31	35.2	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20) Beamforming	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	97.1 PK			2.61 H	28	49.2	47.9
2	*7115.00	84.8 AV			2.61 H	28	36.9	47.9
3	#7125.00	85.4 PK	88.2	-2.8	2.61 H	28	75.6	9.8
4	#7125.00	61.9 AV	68.2	-6.3	2.61 H	28	52.1	9.8
5	#14230.00	58.4 PK	88.2	-29.8	1.63 H	145	46.4	12.0
6	#14230.00	46.2 AV	68.2	-22.0	1.63 H	145	34.2	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	101.9 PK			1.84 V	354	54.0	47.9
2	*7115.00	89.6 AV			1.84 V	354	41.7	47.9
3	#7125.00	87.8 PK	88.2	-0.4	1.84 V	354	78.0	9.8
4	#7125.00	64.6 AV	68.2	-3.6	1.84 V	354	54.8	9.8
5	#14230.00	59.2 PK	88.2	-29.0	2.24 V	37	47.2	12.0
6	#14230.00	47.0 AV	68.2	-21.2	2.24 V	37	35.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 3 : 5965 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	59.4 PK	88.2	-28.8	2.60 H	28	53.6	5.8
2	#5925.00	46.5 AV	68.2	-21.7	2.60 H	28	40.7	5.8
3	*5965.00	108.4 PK			2.60 H	28	64.6	43.8
4	*5965.00	96.0 AV			2.60 H	28	52.2	43.8
5	11930.00	57.8 PK	74.0	-16.2	1.63 H	145	46.5	11.3
6	11930.00	45.6 AV	54.0	-8.4	1.63 H	145	34.3	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.1 PK	88.2	-24.1	1.95 V	336	58.3	5.8
2	#5925.00	49.6 AV	68.2	-18.6	1.95 V	336	43.8	5.8
3	*5965.00	113.7 PK			1.95 V	336	69.9	43.8
4	*5965.00	101.1 AV			1.95 V	336	57.3	43.8
5	11930.00	58.7 PK	74.0	-15.3	2.34 V	28	47.4	11.3
6	11930.00	46.6 AV	54.0	-7.4	2.34 V	28	35.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 43 : 6165 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	108.4 PK			2.59 H	24	63.3	45.1
2	*6165.00	95.9 AV			2.59 H	24	50.8	45.1
3	12330.00	58.1 PK	74.0	-15.9	1.68 H	137	46.3	11.8
4	12330.00	46.0 AV	54.0	-8.0	1.68 H	137	34.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6165.00	113.5 PK			2.15 V	38	68.4	45.1
2	*6165.00	101.2 AV			2.15 V	38	56.1	45.1
3	12330.00	59.2 PK	74.0	-14.8	2.23 V	34	47.4	11.8
4	12330.00	47.2 AV	54.0	-6.8	2.23 V	34	35.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	108.1 PK			2.62 H	27	61.7	46.4
2	*6405.00	95.7 AV			2.62 H	27	49.3	46.4
3	#12810.00	58.5 PK	88.2	-29.7	1.72 H	146	46.3	12.2
4	#12810.00	46.3 AV	68.2	-21.9	1.72 H	146	34.1	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	113.2 PK			2.14 V	317	66.8	46.4
2	*6405.00	100.9 AV			2.14 V	317	54.5	46.4
3	#12810.00	59.6 PK	88.2	-28.6	2.25 V	31	47.4	12.2
4	#12810.00	47.3 AV	68.2	-20.9	2.25 V	31	35.1	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	108.3 PK			2.58 H	29	61.6	46.7
2	*6445.00	95.9 AV			2.58 H	29	49.2	46.7
3	#12890.00	58.7 PK	88.2	-29.5	1.74 H	139	46.4	12.3
4	#12890.00	46.5 AV	68.2	-21.7	1.74 H	139	34.2	12.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	113.4 PK			2.12 V	311	66.7	46.7
2	*6445.00	101.0 AV			2.12 V	311	54.3	46.7
3	#12890.00	59.5 PK	88.2	-28.7	2.17 V	35	47.2	12.3
4	#12890.00	47.3 AV	68.2	-20.9	2.17 V	35	35.0	12.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	108.0 PK			2.59 H	23	61.4	46.6
2	*6485.00	95.6 AV			2.59 H	23	49.0	46.6
3	#12970.00	58.2 PK	88.2	-30.0	1.64 H	135	46.3	11.9
4	#12970.00	46.0 AV	68.2	-22.2	1.64 H	135	34.1	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	113.1 PK			2.09 V	307	66.5	46.6
2	*6485.00	100.8 AV			2.09 V	307	54.2	46.6
3	#12970.00	59.3 PK	88.2	-28.9	2.26 V	38	47.4	11.9
4	#12970.00	47.0 AV	68.2	-21.2	2.26 V	38	35.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	108.5 PK			2.66 H	24	61.6	46.9
2	*6525.00	96.2 AV			2.66 H	24	49.3	46.9
3	#13050.00	58.2 PK	88.2	-30.0	1.63 H	142	46.5	11.7
4	#13050.00	45.9 AV	68.2	-22.3	1.63 H	142	34.2	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	114.0 PK			2.07 V	312	67.1	46.9
2	*6525.00	101.5 AV			2.07 V	312	54.6	46.9
3	#13050.00	59.1 PK	88.2	-29.1	2.14 V	43	47.4	11.7
4	#13050.00	46.8 AV	68.2	-21.4	2.14 V	43	35.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	108.8 PK			2.57 H	27	61.7	47.1
2	*6565.00	96.4 AV			2.57 H	27	49.3	47.1
3	#13130.00	58.3 PK	88.2	-29.9	1.64 H	141	46.6	11.7
4	#13130.00	46.0 AV	68.2	-22.2	1.64 H	141	34.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	113.9 PK			2.06 V	313	66.8	47.1
2	*6565.00	101.6 AV			2.06 V	313	54.5	47.1
3	#13130.00	59.3 PK	88.2	-28.9	2.25 V	38	47.6	11.7
4	#13130.00	47.0 AV	68.2	-21.2	2.25 V	38	35.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	108.6 PK			2.61 H	25	61.3	47.3
2	*6725.00	96.2 AV			2.61 H	25	48.9	47.3
3	#13450.00	58.4 PK	88.2	-29.8	1.74 H	143	46.3	12.1
4	#13450.00	46.0 AV	68.2	-22.2	1.74 H	143	33.9	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	113.8 PK			2.12 V	321	66.5	47.3
2	*6725.00	101.4 AV			2.12 V	321	54.1	47.3
3	#13450.00	59.5 PK	88.2	-28.7	2.23 V	37	47.4	12.1
4	#13450.00	47.2 AV	68.2	-21.0	2.23 V	37	35.1	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	108.9 PK			2.61 H	22	61.8	47.1
2	*6845.00	96.5 AV			2.61 H	22	49.4	47.1
3	#13690.00	57.6 PK	88.2	-30.6	1.71 H	136	46.2	11.4
4	#13690.00	45.2 AV	68.2	-23.0	1.71 H	136	33.8	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	113.9 PK			2.08 V	312	66.8	47.1
2	*6845.00	101.7 AV			2.08 V	312	54.6	47.1
3	#13690.00	58.7 PK	88.2	-29.5	2.17 V	38	47.3	11.4
4	#13690.00	46.4 AV	68.2	-21.8	2.17 V	38	35.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	108.3 PK			2.59 H	31	60.9	47.4
2	*6885.00	96.0 AV			2.59 H	31	48.6	47.4
3	#13770.00	57.8 PK	88.2	-30.4	1.63 H	131	46.3	11.5
4	#13770.00	45.5 AV	68.2	-22.7	1.63 H	131	34.0	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	113.6 PK			2.13 V	339	66.2	47.4
2	*6885.00	101.2 AV			2.13 V	339	53.8	47.4
3	#13770.00	58.9 PK	88.2	-29.3	2.21 V	34	47.4	11.5
4	#13770.00	46.7 AV	68.2	-21.5	2.21 V	34	35.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.1 PK			2.56 H	21	60.7	47.4
2	*7005.00	95.9 AV			2.56 H	21	48.5	47.4
3	#14010.00	58.2 PK	88.2	-30.0	1.73 H	138	46.2	12.0
4	#14010.00	45.9 AV	68.2	-22.3	1.73 H	138	33.9	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	113.3 PK			2.03 V	327	65.9	47.4
2	*7005.00	101.0 AV			2.03 V	327	53.6	47.4
3	#14010.00	59.3 PK	88.2	-28.9	2.14 V	38	47.3	12.0
4	#14010.00	47.0 AV	68.2	-21.2	2.14 V	38	35.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40) Beamforming	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.6 PK			2.61 H	25	61.7	47.9
2	*7085.00	97.3 AV			2.61 H	25	49.4	47.9
3	#7125.00	62.1 PK	88.2	-26.1	2.61 H	25	52.3	9.8
4	#7125.00	49.7 AV	68.2	-18.5	2.61 H	25	39.9	9.8
5	#14170.00	58.2 PK	88.2	-30.0	1.64 H	138	46.3	11.9
6	#14170.00	45.8 AV	68.2	-22.4	1.64 H	138	33.9	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	114.7 PK			1.03 V	332	66.8	47.9
2	*7085.00	102.5 AV			1.03 V	332	54.6	47.9
3	#7125.00	63.5 PK	88.2	-24.7	1.03 V	332	53.7	9.8
4	#7125.00	50.6 AV	68.2	-17.6	1.03 V	332	40.8	9.8
5	#14170.00	59.2 PK	88.2	-29.0	2.17 V	39	47.3	11.9
6	#14170.00	47.2 AV	68.2	-21.0	2.17 V	39	35.3	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.3 PK	88.2	-26.9	2.61 H	29	55.5	5.8
2	#5925.00	46.8 AV	68.2	-21.4	2.61 H	29	41.0	5.8
3	*5985.00	107.3 PK			2.61 H	29	63.3	44.0
4	*5985.00	95.2 AV			2.61 H	29	51.2	44.0
5	11970.00	57.6 PK	74.0	-16.4	1.66 H	132	46.3	11.3
6	11970.00	45.2 AV	54.0	-8.8	1.66 H	132	33.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.8 PK	88.2	-23.4	1.65 V	313	59.0	5.8
2	#5925.00	50.2 AV	68.2	-18.0	1.65 V	313	44.4	5.8
3	*5985.00	114.1 PK			1.65 V	313	70.1	44.0
4	*5985.00	101.7 AV			1.65 V	313	57.7	44.0
5	11970.00	58.6 PK	74.0	-15.4	2.00 V	40	47.3	11.3
6	11970.00	46.6 AV	54.0	-7.4	2.00 V	40	35.3	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	108.5 PK			2.53 H	33	63.6	44.9
2	*6145.00	96.7 AV			2.53 H	33	51.8	44.9
3	12290.00	58.3 PK	74.0	-15.7	1.62 H	138	46.5	11.8
4	12290.00	45.8 AV	54.0	-8.2	1.62 H	138	34.0	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6145.00	115.5 PK			1.66 V	306	70.6	44.9
2	*6145.00	103.5 AV			1.66 V	306	58.6	44.9
3	12290.00	59.4 PK	74.0	-14.6	2.18 V	33	47.6	11.8
4	12290.00	47.3 AV	54.0	-6.7	2.18 V	33	35.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	109.2 PK			2.58 H	35	62.8	46.4
2	*6385.00	97.2 AV			2.58 H	35	50.8	46.4
3	#12770.00	58.6 PK	88.2	-29.6	1.70 H	138	46.2	12.4
4	#12770.00	46.6 AV	68.2	-21.6	1.70 H	138	34.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	116.7 PK			1.71 V	318	70.3	46.4
2	*6385.00	104.2 AV			1.71 V	318	57.8	46.4
3	#12770.00	59.9 PK	88.2	-28.3	2.06 V	47	47.5	12.4
4	#12770.00	47.9 AV	68.2	-20.3	2.06 V	47	35.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.0 PK			2.58 H	37	62.4	46.6
2	*6465.00	97.1 AV			2.58 H	37	50.5	46.6
3	#12930.00	58.4 PK	88.2	-29.8	1.68 H	137	46.2	12.2
4	#12930.00	46.1 AV	68.2	-22.1	1.68 H	137	33.9	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	116.3 PK			1.66 V	301	69.7	46.6
2	*6465.00	103.1 AV			1.66 V	301	56.5	46.6
3	#12930.00	59.2 PK	88.2	-29.0	1.95 V	36	47.0	12.2
4	#12930.00	47.5 AV	68.2	-20.7	1.95 V	36	35.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.3 PK			2.66 H	36	62.1	47.2
2	*6545.00	98.1 AV			2.66 H	36	50.9	47.2
3	#13090.00	58.1 PK	88.2	-30.1	1.72 H	146	46.5	11.6
4	#13090.00	45.8 AV	68.2	-22.4	1.72 H	146	34.2	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	117.2 PK			1.60 V	317	70.0	47.2
2	*6545.00	103.9 AV			1.60 V	317	56.7	47.2
3	#13090.00	59.1 PK	88.2	-29.1	2.06 V	35	47.5	11.6
4	#13090.00	46.9 AV	68.2	-21.3	2.06 V	35	35.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	108.8 PK			2.63 H	14	61.6	47.2
2	*6705.00	97.1 AV			2.63 H	14	49.9	47.2
3	#13410.00	58.4 PK	88.2	-29.8	1.77 H	132	46.3	12.1
4	#13410.00	46.2 AV	68.2	-22.0	1.77 H	132	34.1	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	116.2 PK			1.82 V	30	69.0	47.2
2	*6705.00	103.9 AV			1.82 V	30	56.7	47.2
3	#13410.00	59.5 PK	88.2	-28.7	2.10 V	36	47.4	12.1
4	#13410.00	47.7 AV	68.2	-20.5	2.10 V	36	35.6	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.0 PK			2.44 H	32	60.8	47.2
2	*6865.00	97.4 AV			2.44 H	32	50.2	47.2
3	#13730.00	57.8 PK	88.2	-30.4	1.63 H	134	46.3	11.5
4	#13730.00	45.8 AV	68.2	-22.4	1.63 H	134	34.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	115.9 PK			1.72 V	310	68.7	47.2
2	*6865.00	103.2 AV			1.72 V	310	56.0	47.2
3	#13730.00	58.8 PK	88.2	-29.4	1.93 V	41	47.3	11.5
4	#13730.00	46.8 AV	68.2	-21.4	1.93 V	41	35.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.2 PK			2.61 H	47	59.7	47.5
2	*6945.00	96.5 AV			2.61 H	47	49.0	47.5
3	#13890.00	58.2 PK	88.2	-30.0	1.53 H	141	46.1	12.1
4	#13890.00	46.2 AV	68.2	-22.0	1.53 H	141	34.1	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	115.9 PK			1.60 V	321	68.4	47.5
2	*6945.00	103.4 AV			1.60 V	321	55.9	47.5
3	#13890.00	59.6 PK	88.2	-28.6	2.01 V	41	47.5	12.1
4	#13890.00	47.7 AV	68.2	-20.5	2.01 V	41	35.6	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Beamforming	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.0 PK			2.58 H	40	59.4	47.6
2	*7025.00	96.9 AV			2.58 H	40	49.3	47.6
3	#7125.00	59.9 PK	88.2	-28.3	2.58 H	40	50.1	9.8
4	#7125.00	46.4 AV	68.2	-21.8	2.58 H	40	36.6	9.8
5	#14050.00	58.5 PK	88.2	-29.7	1.63 H	145	46.5	12.0
6	#14050.00	46.3 AV	68.2	-21.9	1.63 H	145	34.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	115.1 PK			1.67 V	331	67.5	47.6
2	*7025.00	103.1 AV			1.67 V	331	55.5	47.6
3	#7125.00	61.8 PK	88.2	-26.4	1.67 V	331	52.0	9.8
4	#7125.00	48.2 AV	68.2	-20.0	1.67 V	331	38.4	9.8
5	#14050.00	59.4 PK	88.2	-28.8	2.34 V	28	47.4	12.0
6	#14050.00	47.3 AV	68.2	-20.9	2.34 V	28	35.3	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.3 PK	88.2	-29.9	2.55 H	29	52.5	5.8
2	#5925.00	50.2 AV	68.2	-18.0	2.55 H	29	44.4	5.8
3	*6025.00	105.1 PK			2.55 H	29	61.0	44.1
4	*6025.00	93.6 AV			2.55 H	29	49.5	44.1
5	12050.00	57.7 PK	74.0	-16.3	1.60 H	147	46.0	11.7
6	12050.00	45.9 AV	54.0	-8.1	1.60 H	147	34.2	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	70.6 PK	88.2	-17.6	1.65 V	313	64.8	5.8
2	#5925.00	53.1 AV	68.2	-15.1	1.65 V	313	47.3	5.8
3	*6025.00	111.7 PK			1.65 V	313	67.6	44.1
4	*6025.00	99.6 AV			1.65 V	313	55.5	44.1
5	12050.00	59.2 PK	74.0	-14.8	2.31 V	28	47.5	11.7
6	12050.00	47.0 AV	54.0	-7.0	2.31 V	28	35.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.6 PK			2.61 H	28	60.5	45.1
2	*6185.00	94.4 AV			2.61 H	28	49.3	45.1
3	12370.00	58.3 PK	74.0	-15.7	1.63 H	145	46.4	11.9
4	12370.00	46.2 AV	54.0	-7.8	1.63 H	145	34.3	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	111.7 PK			1.62 V	305	66.6	45.1
2	*6185.00	99.4 AV			1.62 V	305	54.3	45.1
3	12370.00	59.2 PK	74.0	-14.8	2.24 V	37	47.3	11.9
4	12370.00	47.0 AV	54.0	-7.0	2.24 V	37	35.1	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.8 PK			2.62 H	33	61.5	46.3
2	*6345.00	96.3 AV			2.62 H	33	50.0	46.3
3	12690.00	58.9 PK	74.0	-15.1	1.71 H	140	46.5	12.4
4	12690.00	46.6 AV	54.0	-7.4	1.71 H	140	34.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	113.3 PK			1.66 V	307	67.0	46.3
2	*6345.00	101.2 AV			1.66 V	307	54.9	46.3
3	12690.00	59.8 PK	74.0	-14.2	2.26 V	31	47.4	12.4
4	12690.00	47.6 AV	54.0	-6.4	2.26 V	31	35.2	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.3 PK			2.60 H	22	60.6	46.7
2	*6505.00	95.6 AV			2.60 H	22	48.9	46.7
3	#13010.00	58.6 PK	88.2	-29.6	1.64 H	137	46.8	11.8
4	#13010.00	46.6 AV	68.2	-21.6	1.64 H	137	34.8	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.5 PK			1.85 V	333	65.8	46.7
2	*6505.00	100.9 AV			1.85 V	333	54.2	46.7
3	#13010.00	59.1 PK	88.2	-29.1	2.22 V	40	47.3	11.8
4	#13010.00	46.9 AV	68.2	-21.3	2.22 V	40	35.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.4 PK			2.70 H	14	59.4	47.0
2	*6665.00	95.2 AV			2.70 H	14	48.2	47.0
3	13330.00	58.9 PK	74.0	-15.1	1.66 H	137	46.7	12.2
4	13330.00	47.0 AV	54.0	-7.0	1.66 H	137	34.8	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	113.2 PK			1.65 V	323	66.2	47.0
2	*6665.00	101.9 AV			1.65 V	323	54.9	47.0
3	13330.00	59.3 PK	74.0	-14.7	2.23 V	39	47.1	12.2
4	13330.00	47.2 AV	54.0	-6.8	2.23 V	39	35.0	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	106.8 PK			2.62 H	29	59.6	47.2
2	*6825.00	95.1 AV			2.62 H	29	47.9	47.2
3	#13650.00	58.0 PK	88.2	-30.2	1.69 H	145	46.5	11.5
4	#13650.00	45.8 AV	68.2	-22.4	1.69 H	145	34.3	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	112.6 PK			1.70 V	300	65.4	47.2
2	*6825.00	101.0 AV			1.70 V	300	53.8	47.2
3	#13650.00	58.9 PK	88.2	-29.3	2.06 V	32	47.4	11.5
4	#13650.00	46.7 AV	68.2	-21.5	2.06 V	32	35.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Beamforming	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	105.9 PK			2.60 H	39	58.5	47.4
2	*6985.00	95.2 AV			2.60 H	39	47.8	47.4
3	#7125.00	65.3 PK	88.2	-22.9	2.60 H	39	55.5	9.8
4	#7125.00	52.1 AV	68.2	-16.1	2.60 H	39	42.3	9.8
5	#13970.00	58.8 PK	88.2	-29.4	1.62 H	138	46.7	12.1
6	#13970.00	46.6 AV	68.2	-21.6	1.62 H	138	34.5	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.6 PK			2.15 V	334	64.2	47.4
2	*6985.00	99.9 AV			2.15 V	334	52.5	47.4
3	#7125.00	73.6 PK	88.2	-14.6	2.15 V	334	63.8	9.8
4	#7125.00	55.9 AV	68.2	-12.3	2.15 V	334	46.1	9.8
5	#13970.00	59.5 PK	88.2	-28.7	2.23 V	38	47.4	12.1
6	#13970.00	47.5 AV	68.2	-20.7	2.23 V	38	35.4	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.5 PK	88.2	-14.7	2.60 H	30	67.7	5.8
2	#5925.00	59.7 AV	68.2	-8.5	2.60 H	30	53.9	5.8
3	*6105.00	106.5 PK			2.60 H	30	62.1	44.4
4	*6105.00	93.9 AV			2.60 H	30	49.5	44.4
5	12210.00	58.4 PK	74.0	-15.6	1.62 H	140	46.7	11.7
6	12210.00	46.2 AV	54.0	-7.8	1.62 H	140	34.5	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	80.1 PK	88.2	-8.1	1.66 V	313	74.3	5.8
2	#5925.00	63.2 AV	68.2	-5.0	1.66 V	313	57.4	5.8
3	*6105.00	112.7 PK			1.66 V	313	68.3	44.4
4	*6105.00	99.4 AV			1.66 V	313	55.0	44.4
5	12210.00	59.2 PK	74.0	-14.8	2.30 V	41	47.5	11.7
6	12210.00	46.9 AV	54.0	-7.1	2.30 V	41	35.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	105.4 PK			2.52 H	18	59.8	45.6
2	*6265.00	93.5 AV			2.52 H	18	47.9	45.6
3	12530.00	58.3 PK	74.0	-15.7	1.73 H	148	46.2	12.1
4	12530.00	46.5 AV	54.0	-7.5	1.73 H	148	34.4	12.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6265.00	113.0 PK			1.67 V	325	67.4	45.6
2	*6265.00	99.7 AV			1.67 V	325	54.1	45.6
3	12530.00	59.3 PK	74.0	-14.7	2.14 V	37	47.2	12.1
4	12530.00	47.4 AV	54.0	-6.6	2.14 V	37	35.3	12.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	108.0 PK			2.62 H	25	61.4	46.6
2	*6425.00	96.9 AV			2.62 H	25	50.3	46.6
3	#12850.00	58.9 PK	88.2	-29.3	1.77 H	141	46.5	12.4
4	#12850.00	46.6 AV	68.2	-21.6	1.77 H	141	34.2	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	113.7 PK			1.95 V	324	67.1	46.6
2	*6425.00	102.1 AV			1.95 V	324	55.5	46.6
3	#12850.00	59.5 PK	88.2	-28.7	2.17 V	30	47.1	12.4
4	#12850.00	47.9 AV	68.2	-20.3	2.17 V	30	35.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.8 PK			2.60 H	17	59.9	46.9
2	*6585.00	95.1 AV			2.60 H	17	48.2	46.9
3	#13170.00	58.3 PK	88.2	-29.9	1.66 H	145	46.5	11.8
4	#13170.00	46.3 AV	68.2	-21.9	1.66 H	145	34.5	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	114.5 PK			1.70 V	318	67.6	46.9
2	*6585.00	101.4 AV			1.70 V	318	54.5	46.9
3	#13170.00	59.0 PK	88.2	-29.2	2.21 V	36	47.2	11.8
4	#13170.00	46.9 AV	68.2	-21.3	2.21 V	36	35.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	106.8 PK			2.65 H	22	59.5	47.3
2	*6745.00	96.5 AV			2.65 H	22	49.2	47.3
3	#13490.00	58.7 PK	88.2	-29.5	1.73 H	138	46.7	12.0
4	#13490.00	46.3 AV	68.2	-21.9	1.73 H	138	34.3	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	114.1 PK			1.81 V	307	66.8	47.3
2	*6745.00	101.8 AV			1.81 V	307	54.5	47.3
3	#13490.00	59.3 PK	88.2	-28.9	2.18 V	30	47.3	12.0
4	#13490.00	47.5 AV	68.2	-20.7	2.18 V	30	35.5	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Beamforming	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.4 PK			2.70 H	10	62.9	47.5
2	*6905.00	98.0 AV			2.70 H	10	50.5	47.5
3	#7125.00	80.3 PK	88.2	-7.9	2.70 H	10	70.5	9.8
4	#7125.00	57.0 AV	68.2	-11.2	2.70 H	10	47.2	9.8
5	#13810.00	58.2 PK	88.2	-30.0	1.60 H	141	46.6	11.6
6	#13810.00	45.9 AV	68.2	-22.3	1.60 H	141	34.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	116.3 PK			1.66 V	329	68.8	47.5
2	*6905.00	105.0 AV			1.66 V	329	57.5	47.5
3	#7125.00	82.1 PK	88.2	-6.1	1.66 V	329	72.3	9.8
4	#7125.00	60.0 AV	68.2	-8.2	1.66 V	329	50.2	9.8
5	#13810.00	58.9 PK	88.2	-29.3	2.26 V	28	47.3	11.6
6	#13810.00	46.7 AV	68.2	-21.5	2.26 V	28	35.1	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 7 : 5985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	58.6 PK	88.2	-29.6	3.52 H	330	52.8	5.8
2	#5925.00	41.5 AV	68.2	-26.7	3.52 H	330	35.7	5.8
3	*5985.00	107.2 PK			3.52 H	30	63.2	44.0
4	*5985.00	95.1 AV			3.52 H	30	51.1	44.0
5	11970.00	58.5 PK	74.0	-15.5	1.55 H	150	47.2	11.3
6	11970.00	45.5 AV	54.0	-8.5	1.55 H	150	34.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.3 PK	88.2	-26.9	1.61 V	312	55.5	5.8
2	#5925.00	45.5 AV	68.2	-22.7	1.61 V	312	39.7	5.8
3	*5985.00	111.5 PK			1.61 V	312	67.5	44.0
4	*5985.00	99.9 AV			1.61 V	312	55.9	44.0
5	11970.00	58.8 PK	74.0	-15.2	2.09 V	20	47.5	11.3
6	11970.00	46.8 AV	54.0	-7.2	2.09 V	20	35.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	106.7 PK			3.27 H	24	60.1	46.6
2	*6465.00	94.8 AV			3.27 H	24	48.2	46.6
3	#12930.00	59.7 PK	88.2	-28.5	1.55 H	150	47.5	12.2
4	#12930.00	46.7 AV	68.2	-21.5	1.55 H	150	34.5	12.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	112.4 PK			2.58 V	22	65.8	46.6
2	*6465.00	99.8 AV			2.58 V	22	53.2	46.6
3	#12930.00	60.1 PK	88.2	-28.1	2.11 V	23	47.9	12.2
4	#12930.00	48.5 AV	68.2	-19.7	2.11 V	23	36.3	12.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	108.0 PK			3.12 H	12	60.8	47.2
2	*6865.00	95.7 AV			3.12 H	12	48.5	47.2
3	#13730.00	59.2 PK	88.2	-29.0	1.62 H	156	47.7	11.5
4	#13730.00	46.3 AV	68.2	-21.9	1.62 H	156	34.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	113.2 PK			2.47 V	19	66.0	47.2
2	*6865.00	100.7 AV			2.47 V	19	53.5	47.2
3	#13730.00	59.7 PK	88.2	-28.5	2.00 V	30	48.2	11.5
4	#13730.00	48.0 AV	68.2	-20.2	2.00 V	30	36.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80) Punctured by 20 MHz	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.9 PK			3.00 H	26	60.3	47.6
2	*7025.00	95.7 AV			3.00 H	26	48.1	47.6
3	#7125.00	63.6 PK	88.2	-24.6	3.00 H	26	53.8	9.8
4	#7125.00	47.4 AV	68.2	-20.8	3.00 H	26	37.6	9.8
5	#14050.00	60.2 PK	88.2	-28.0	1.68 H	152	48.2	12.0
6	#14050.00	47.0 AV	68.2	-21.2	1.68 H	152	35.0	12.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	113.6 PK			1.45 V	23	66.0	47.6
2	*7025.00	100.3 AV			1.45 V	23	52.7	47.6
3	#7125.00	64.3 PK	88.2	-23.9	1.45 V	23	54.5	9.8
4	#7125.00	48.6 AV	68.2	-19.6	1.45 V	23	38.8	9.8
5	#14050.00	60.6 PK	88.2	-27.6	2.06 V	26	48.6	12.0
6	#14050.00	49.0 AV	68.2	-19.2	2.06 V	26	37.0	12.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	62.4 PK	88.2	-25.8	3.51 H	23	57.5	4.9
2	#5925.00	43.9 AV	68.2	-24.3	3.51 H	23	39.0	4.9
3	*6025.00	105.7 PK			3.51 H	23	62.5	43.2
4	*6025.00	92.6 AV			3.51 H	23	49.4	43.2
5	12050.00	58.4 PK	74.0	-15.6	1.68 H	159	47.4	11.0
6	12050.00	45.7 AV	54.0	-8.3	1.68 H	159	34.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.5 PK	88.2	-22.7	1.70 V	335	60.6	4.9
2	#5925.00	46.3 AV	68.2	-21.9	1.70 V	335	41.4	4.9
3	*6025.00	109.8 PK			1.70 V	335	66.6	43.2
4	*6025.00	96.7 AV			1.70 V	335	53.5	43.2
5	12050.00	58.4 PK	74.0	-15.6	1.99 V	32	47.4	11.0
6	12050.00	46.2 AV	54.0	-7.8	1.99 V	32	35.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.5 PK			3.15 H	12	60.5	46.0
2	*6505.00	94.4 AV			3.15 H	12	48.4	46.0
3	#13010.00	58.3 PK	88.2	-29.9	1.65 H	160	47.7	10.6
4	#13010.00	45.1 AV	68.2	-23.1	1.65 H	160	34.5	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	112.5 PK			1.77 V	333	66.5	46.0
2	*6505.00	99.6 AV			1.77 V	333	53.6	46.0
3	#13010.00	58.2 PK	88.2	-30.0	1.95 V	38	47.6	10.6
4	#13010.00	46.0 AV	68.2	-22.2	1.95 V	38	35.4	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.4 PK			3.06 H	1	60.1	46.3
2	*6665.00	94.4 AV			3.06 H	1	48.1	46.3
3	13330.00	59.3 PK	74.0	-14.7	1.77 H	157	47.8	11.5
4	13330.00	46.5 AV	54.0	-7.5	1.77 H	157	35.0	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.8 PK			1.62 V	328	64.5	46.3
2	*6665.00	98.3 AV			1.62 V	328	52.0	46.3
3	13330.00	60.0 PK	74.0	-14.0	2.06 V	26	48.5	11.5
4	13330.00	48.0 AV	54.0	-6.0	2.06 V	26	36.5	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 20 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.0 PK			3.09 H	11	60.2	46.8
2	*6985.00	93.6 AV			3.09 H	11	46.8	46.8
3	#7125.00	71.1 PK	88.2	-17.1	3.09 H	11	61.9	9.2
4	#7125.00	50.2 AV	68.2	-18.0	3.09 H	11	41.0	9.2
5	#13970.00	59.9 PK	88.2	-28.3	1.70 H	144	48.0	11.9
6	#13970.00	46.8 AV	68.2	-21.4	1.70 H	144	34.9	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	111.3 PK			1.40 V	26	64.5	46.8
2	*6985.00	98.7 AV			1.40 V	26	51.9	46.8
3	#7125.00	75.1 PK	88.2	-13.1	1.40 V	26	65.9	9.2
4	#7125.00	51.5 AV	68.2	-16.7	1.40 V	26	42.3	9.2
5	#13970.00	60.8 PK	88.2	-27.4	2.05 V	25	48.9	11.9
6	#13970.00	49.3 AV	68.2	-18.9	2.05 V	25	37.4	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 15 : 6025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	61.9 PK	88.2	-26.3	3.50 H	17	57.0	4.9
2	#5925.00	43.5 AV	68.2	-24.7	3.50 H	17	38.6	4.9
3	*6025.00	105.3 PK			3.50 H	17	62.1	43.2
4	*6025.00	92.4 AV			3.50 H	17	49.2	43.2
5	12050.00	58.3 PK	74.0	-15.7	1.62 H	151	47.3	11.0
6	12050.00	45.5 AV	54.0	-8.5	1.62 H	151	34.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	65.0 PK	88.2	-23.2	1.67 V	329	60.1	4.9
2	#5925.00	45.9 AV	68.2	-22.3	1.67 V	329	41.0	4.9
3	*6025.00	109.2 PK			1.67 V	329	66.0	43.2
4	*6025.00	96.4 AV			1.67 V	329	53.2	43.2
5	12050.00	58.5 PK	74.0	-15.5	2.07 V	26	47.5	11.0
6	12050.00	46.3 AV	54.0	-7.7	2.07 V	26	35.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	106.0 PK			3.03 H	7	60.0	46.0
2	*6505.00	94.2 AV			3.03 H	7	48.2	46.0
3	#13010.00	57.9 PK	88.2	-30.3	1.65 H	153	47.3	10.6
4	#13010.00	45.2 AV	68.2	-23.0	1.65 H	153	34.6	10.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	111.8 PK			1.66 V	321	65.8	46.0
2	*6505.00	98.7 AV			1.66 V	321	52.7	46.0
3	#13010.00	57.7 PK	88.2	-30.5	2.00 V	23	47.1	10.6
4	#13010.00	45.8 AV	68.2	-22.4	2.00 V	23	35.2	10.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	106.2 PK			3.21 H	8	59.9	46.3
2	*6665.00	94.2 AV			3.21 H	8	47.9	46.3
3	13330.00	58.7 PK	74.0	-15.3	1.71 H	152	47.2	11.5
4	13330.00	46.5 AV	54.0	-7.5	1.71 H	152	35.0	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			1.58 V	321	64.2	46.3
2	*6665.00	97.5 AV			1.58 V	321	51.2	46.3
3	13330.00	59.7 PK	74.0	-14.3	2.12 V	28	48.2	11.5
4	13330.00	47.7 AV	54.0	-6.3	2.12 V	28	36.2	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160) Punctured by 40 MHz	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.3 PK			3.10 H	15	59.5	46.8
2	*6985.00	93.5 AV			3.10 H	15	46.7	46.8
3	#7125.00	71.2 PK	88.2	-17.0	3.10 H	15	62.0	9.2
4	#7125.00	49.7 AV	68.2	-18.5	3.10 H	15	40.5	9.2
5	#13970.00	60.1 PK	88.2	-28.1	1.77 H	152	48.2	11.9
6	#13970.00	47.1 AV	68.2	-21.1	1.77 H	152	35.2	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.8 PK			1.38 V	23	64.0	46.8
2	*6985.00	98.4 AV			1.38 V	23	51.6	46.8
3	#7125.00	75.8 PK	88.2	-12.4	1.38 V	23	66.6	9.2
4	#7125.00	50.7 AV	68.2	-17.5	1.38 V	23	41.5	9.2
5	#13970.00	60.7 PK	88.2	-27.5	2.11 V	21	48.8	11.9
6	#13970.00	49.1 AV	68.2	-19.1	2.11 V	21	37.2	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	68.7 PK	88.2	-19.5	3.33 H	16	62.9	5.8
2	#5925.00	50.3 AV	68.2	-17.9	3.33 H	16	44.5	5.8
3	*6105.00	108.3 PK			3.33 H	16	63.9	44.4
4	*6105.00	93.7 AV			3.33 H	16	49.3	44.4
5	12210.00	58.9 PK	74.0	-15.1	1.60 H	153	47.2	11.7
6	12210.00	46.1 AV	54.0	-7.9	1.60 H	153	34.4	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	73.0 PK	88.2	-15.2	1.79 V	322	67.2	5.8
2	#5925.00	54.3 AV	68.2	-13.9	1.79 V	322	48.5	5.8
3	*6105.00	110.9 PK			1.79 V	322	66.5	44.4
4	*6105.00	98.0 AV			1.79 V	322	53.6	44.4
5	12210.00	59.1 PK	74.0	-14.9	2.21 V	29	47.4	11.7
6	12210.00	46.9 AV	54.0	-7.1	2.21 V	29	35.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	105.9 PK			3.31 H	18	59.3	46.6
2	*6425.00	93.4 AV			3.31 H	18	46.8	46.6
3	#12850.00	59.3 PK	88.2	-28.9	1.68 H	151	46.9	12.4
4	#12850.00	47.1 AV	68.2	-21.1	1.68 H	151	34.7	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.0 PK			1.82 V	316	63.4	46.6
2	*6425.00	97.7 AV			1.82 V	316	51.1	46.6
3	#12850.00	60.2 PK	88.2	-28.0	2.28 V	34	47.8	12.4
4	#12850.00	48.0 AV	68.2	-20.2	2.28 V	34	35.6	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.0 PK			3.36 H	19	60.1	46.9
2	*6585.00	93.5 AV			3.36 H	19	46.6	46.9
3	#13170.00	59.2 PK	88.2	-29.0	1.73 H	154	47.4	11.8
4	#13170.00	47.0 AV	68.2	-21.2	1.73 H	154	35.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.1 PK			1.77 V	212	64.2	46.9
2	*6585.00	97.8 AV			1.77 V	212	50.9	46.9
3	#13170.00	60.2 PK	88.2	-28.0	2.19 V	23	48.4	11.8
4	#13170.00	48.0 AV	68.2	-20.2	2.19 V	23	36.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 40 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	105.8 PK			3.09 H	19	58.3	47.5
2	*6905.00	92.7 AV			3.09 H	19	45.2	47.5
3	#7125.00	66.8 PK	88.2	-21.4	3.09 H	19	57.0	9.8
4	#7125.00	49.3 AV	68.2	-18.9	3.09 H	19	39.5	9.8
5	#13810.00	59.7 PK	88.2	-28.5	1.70 H	152	48.1	11.6
6	#13810.00	46.7 AV	68.2	-21.5	1.70 H	152	35.1	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.5 PK			1.74 V	326	63.0	47.5
2	*6905.00	97.2 AV			1.74 V	326	49.7	47.5
3	#7125.00	70.6 PK	88.2	-17.6	1.74 V	326	60.8	9.8
4	#7125.00	49.8 AV	68.2	-18.4	1.74 V	326	40.0	9.8
5	#13810.00	60.7 PK	88.2	-27.5	2.06 V	26	49.1	11.6
6	#13810.00	49.2 AV	68.2	-19.0	2.06 V	26	37.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	64.7 PK	88.2	-23.5	3.32 H	17	58.9	5.8
2	#5925.00	48.1 AV	68.2	-20.1	3.32 H	17	42.3	5.8
3	*6105.00	107.6 PK			3.32 H	17	63.2	44.4
4	*6105.00	93.9 AV			3.32 H	17	49.5	44.4
5	12210.00	59.0 PK	74.0	-15.0	1.59 H	144	47.3	11.7
6	12210.00	46.0 AV	54.0	-8.0	1.59 H	144	34.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.8 PK	88.2	-16.4	1.70 V	306	66.0	5.8
2	#5925.00	51.7 AV	68.2	-16.5	1.70 V	306	45.9	5.8
3	*6105.00	110.3 PK			1.70 V	306	65.9	44.4
4	*6105.00	97.9 AV			1.70 V	306	53.5	44.4
5	12210.00	59.0 PK	74.0	-15.0	2.02 V	32	47.3	11.7
6	12210.00	47.0 AV	54.0	-7.0	2.02 V	32	35.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.5 PK			3.37 H	21	59.9	46.6
2	*6425.00	93.8 AV			3.37 H	21	47.2	46.6
3	#12850.00	59.6 PK	88.2	-28.6	1.67 H	148	47.2	12.4
4	#12850.00	47.4 AV	68.2	-20.8	1.67 H	148	35.0	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	111.0 PK			1.79 V	313	64.4	46.6
2	*6425.00	98.1 AV			1.79 V	313	51.5	46.6
3	#12850.00	60.3 PK	88.2	-27.9	2.24 V	37	47.9	12.4
4	#12850.00	48.0 AV	68.2	-20.2	2.24 V	37	35.6	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.7 PK			3.33 H	25	59.8	46.9
2	*6585.00	93.7 AV			3.33 H	25	46.8	46.9
3	#13170.00	59.1 PK	88.2	-29.1	1.77 H	152	47.3	11.8
4	#13170.00	46.9 AV	68.2	-21.3	1.77 H	152	35.1	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.1 PK			1.81 V	324	64.2	46.9
2	*6585.00	98.1 AV			1.81 V	324	51.2	46.9
3	#13170.00	60.1 PK	88.2	-28.1	2.14 V	29	48.3	11.8
4	#13170.00	48.0 AV	68.2	-20.2	2.14 V	29	36.2	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.6 PK			3.17 H	12	59.1	47.5
2	*6905.00	92.7 AV			3.17 H	12	45.2	47.5
3	#7125.00	66.0 PK	88.2	-22.2	3.17 H	12	56.2	9.8
4	#7125.00	49.0 AV	68.2	-19.2	3.17 H	12	39.2	9.8
5	#13810.00	59.9 PK	88.2	-28.3	1.77 H	149	48.3	11.6
6	#13810.00	46.9 AV	68.2	-21.3	1.77 H	149	35.3	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.7 PK			1.77 V	332	63.2	47.5
2	*6905.00	97.7 AV			1.77 V	332	50.2	47.5
3	#7125.00	69.1 PK	88.2	-19.1	1.77 V	332	59.3	9.8
4	#7125.00	49.3 AV	68.2	-18.9	1.77 V	332	39.5	9.8
5	#13810.00	60.4 PK	88.2	-27.8	2.01 V	18	48.8	11.6
6	#13810.00	49.4 AV	68.2	-18.8	2.01 V	18	37.8	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 31 : 6105 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	3.40 H	9	58.1	5.8
2	#5925.00	46.3 AV	68.2	-21.9	3.40 H	9	40.5	5.8
3	*6105.00	108.2 PK			3.40 H	9	63.8	44.4
4	*6105.00	94.9 AV			3.40 H	9	50.5	44.4
5	12210.00	58.9 PK	74.0	-15.1	1.56 H	158	47.2	11.7
6	12210.00	46.0 AV	54.0	-8.0	1.56 H	158	34.3	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	71.3 PK	88.2	-16.9	1.73 V	313	65.5	5.8
2	#5925.00	50.2 AV	68.2	-18.0	1.73 V	313	44.4	5.8
3	*6105.00	111.3 PK			1.73 V	313	66.9	44.4
4	*6105.00	98.4 AV			1.73 V	313	54.0	44.4
5	12210.00	58.9 PK	74.0	-15.1	2.11 V	30	47.2	11.7
6	12210.00	46.7 AV	54.0	-7.3	2.11 V	30	35.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	106.3 PK			3.34 H	19	59.7	46.6
2	*6425.00	93.6 AV			3.34 H	19	47.0	46.6
3	#12850.00	59.1 PK	88.2	-29.1	1.66 H	153	46.7	12.4
4	#12850.00	47.0 AV	68.2	-21.2	1.66 H	153	34.6	12.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.5 PK			1.80 V	314	63.9	46.6
2	*6425.00	97.9 AV			1.80 V	314	51.3	46.6
3	#12850.00	60.1 PK	88.2	-28.1	2.21 V	38	47.7	12.4
4	#12850.00	47.9 AV	68.2	-20.3	2.21 V	38	35.5	12.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.1 PK			3.35 H	21	60.2	46.9
2	*6585.00	93.5 AV			3.35 H	21	46.6	46.9
3	#13170.00	59.3 PK	88.2	-28.9	1.78 H	156	47.5	11.8
4	#13170.00	47.0 AV	68.2	-21.2	1.78 H	156	35.2	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	111.3 PK			1.79 V	326	64.4	46.9
2	*6585.00	98.2 AV			1.79 V	326	51.3	46.9
3	#13170.00	60.2 PK	88.2	-28.0	2.16 V	31	48.4	11.8
4	#13170.00	48.1 AV	68.2	-20.1	2.16 V	31	36.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320) Punctured by 80+40 MHz	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.0 PK			3.06 H	8	59.5	47.5
2	*6905.00	94.1 AV			3.06 H	8	46.6	47.5
3	#7125.00	67.6 PK	88.2	-20.6	3.06 H	8	57.8	9.8
4	#7125.00	49.6 AV	68.2	-18.6	3.06 H	8	39.8	9.8
5	#13810.00	60.0 PK	88.2	-28.2	1.76 H	156	48.4	11.6
6	#13810.00	47.0 AV	68.2	-21.2	1.76 H	156	35.4	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	111.0 PK			1.72 V	314	63.5	47.5
2	*6905.00	98.6 AV			1.72 V	314	51.1	47.5
3	#7125.00	70.3 PK	88.2	-17.9	1.72 V	314	60.5	9.8
4	#7125.00	50.2 AV	68.2	-18.0	1.72 V	314	40.4	9.8
5	#13810.00	60.2 PK	88.2	-28.0	2.00 V	15	48.6	11.6
6	#13810.00	49.4 AV	68.2	-18.8	2.00 V	15	37.8	11.6


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 1

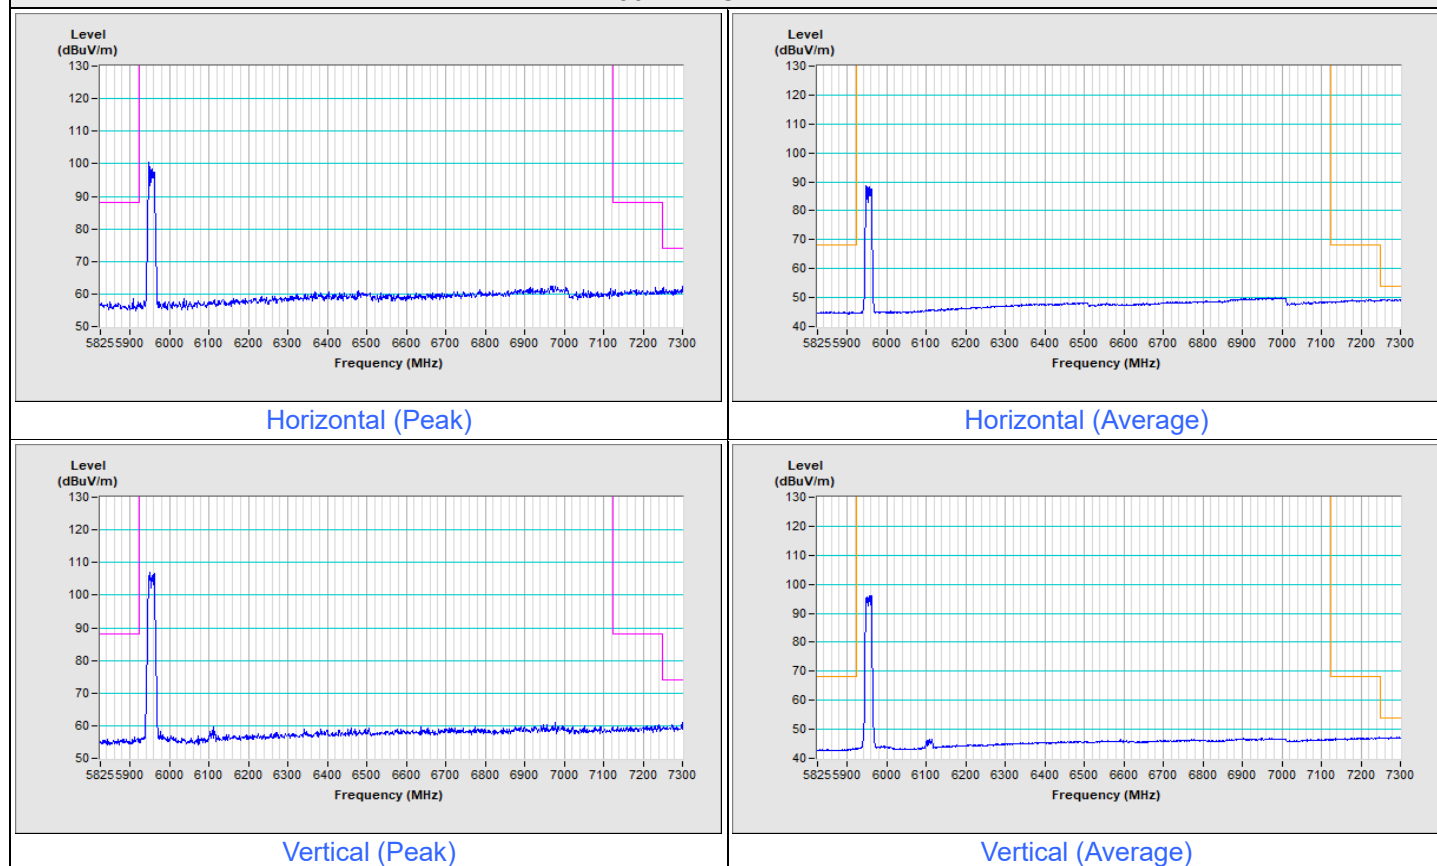


802.11a Channel 233

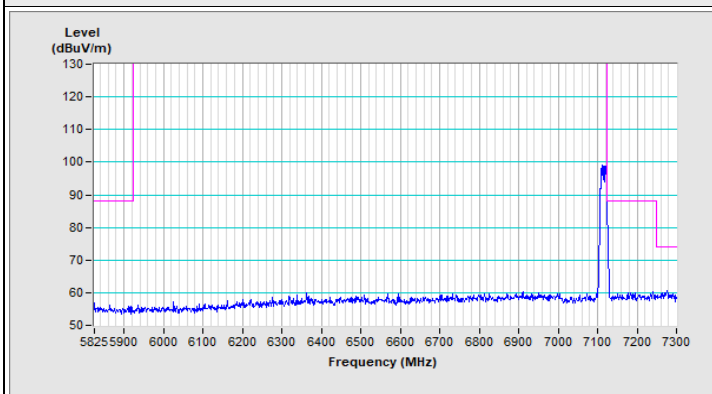


Horizontal (Peak)

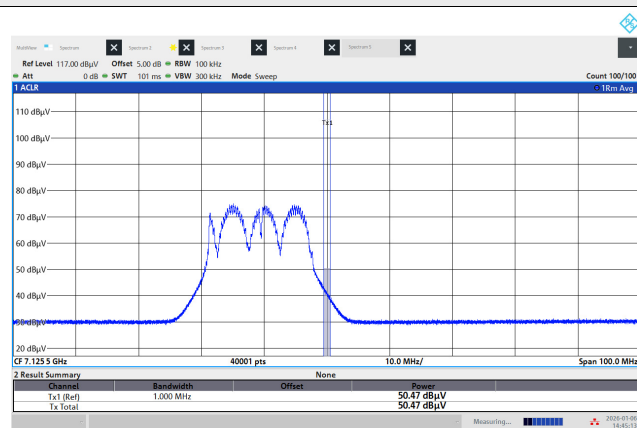

Horizontal (Average)

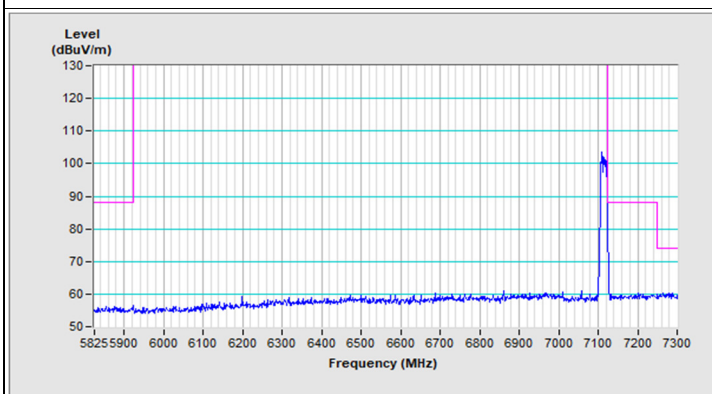


Vertical (Peak)

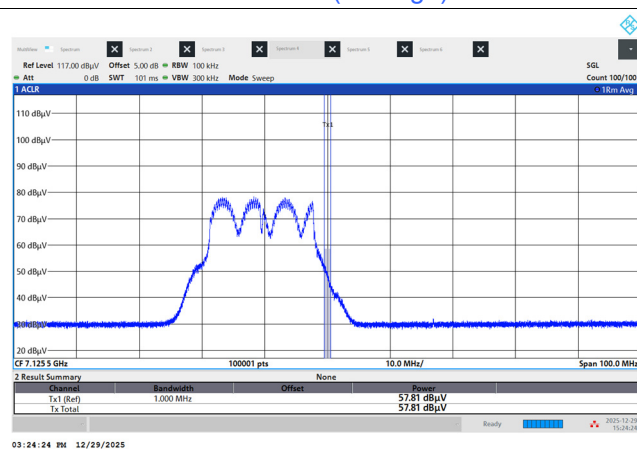


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT20) Beamforming Channel 1

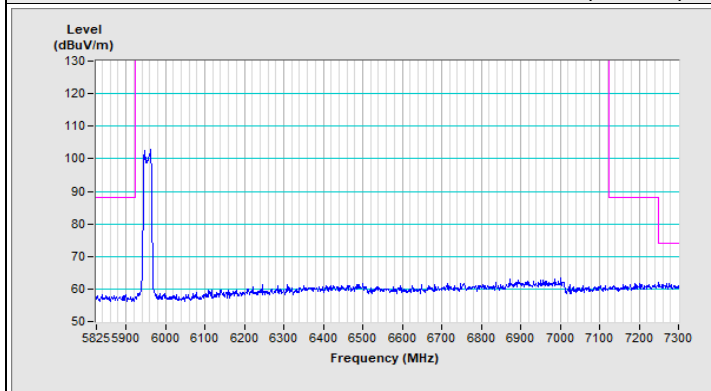


Horizontal (Peak)

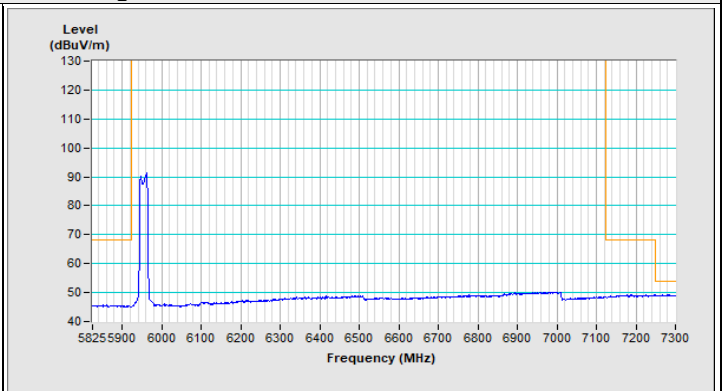

Horizontal (Average)

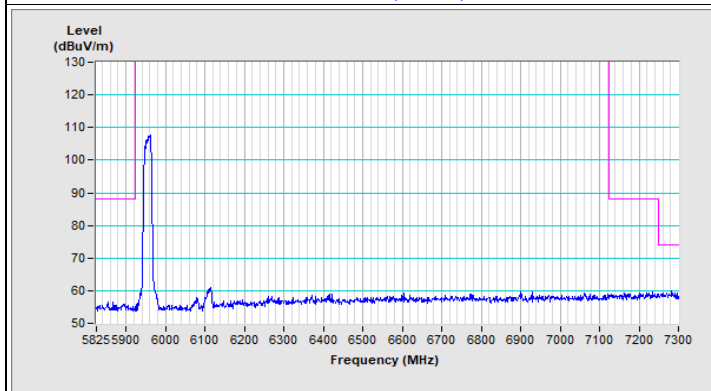


Vertical (Peak)

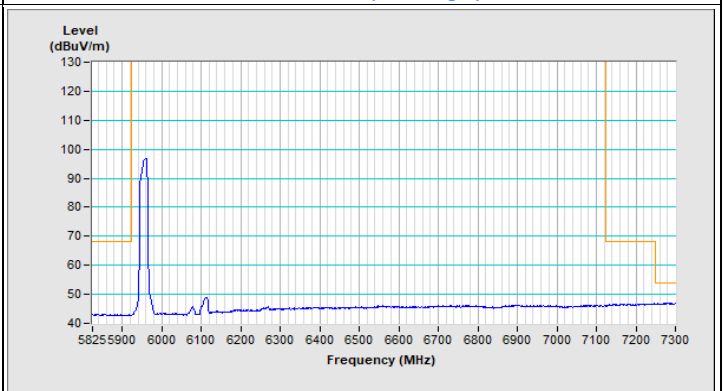


Vertical (Average)


802.11be (EHT20) Beamforming Channel 233

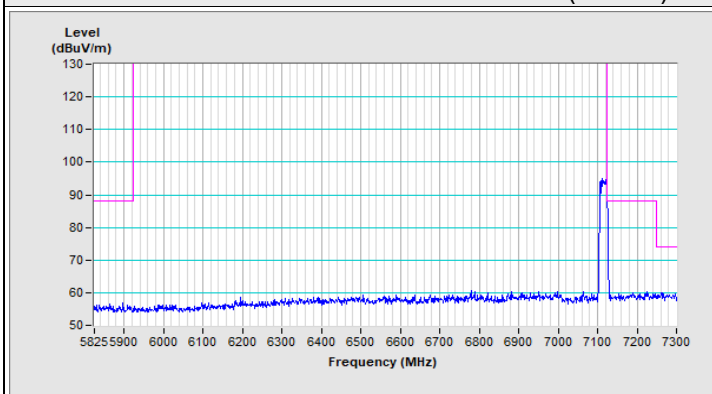


Horizontal (Peak)

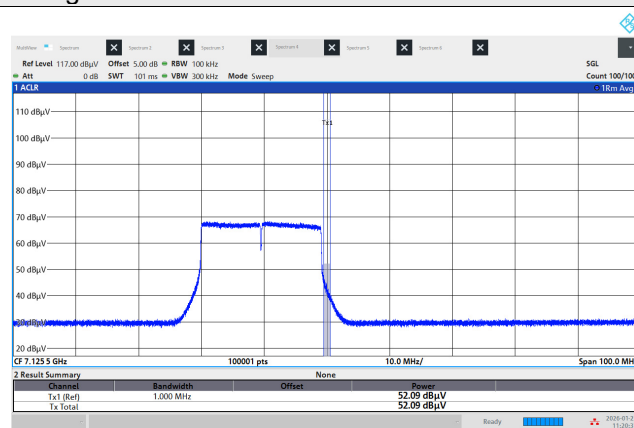

Horizontal (Average)

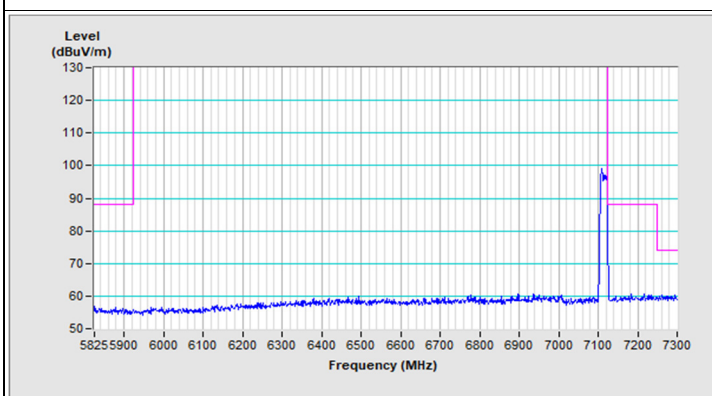


Vertical (Peak)

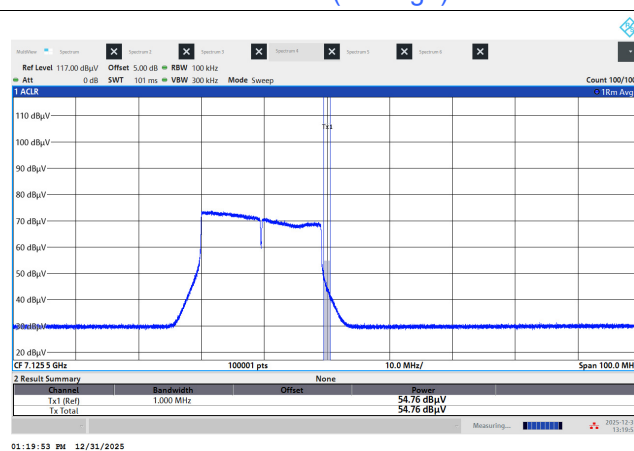


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Beamforming Channel 3

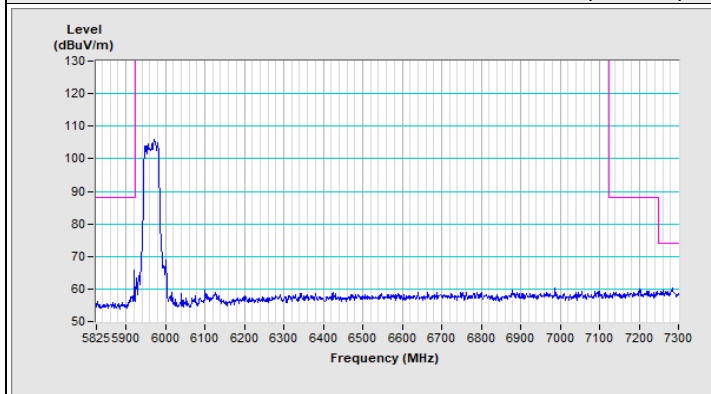


Horizontal (Peak)

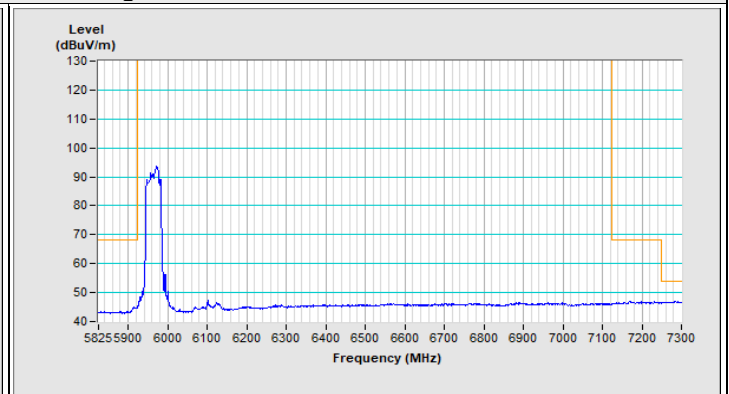

Horizontal (Average)

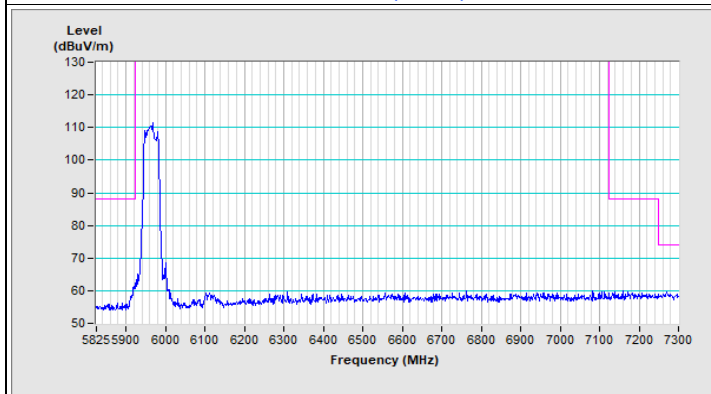


Vertical (Peak)

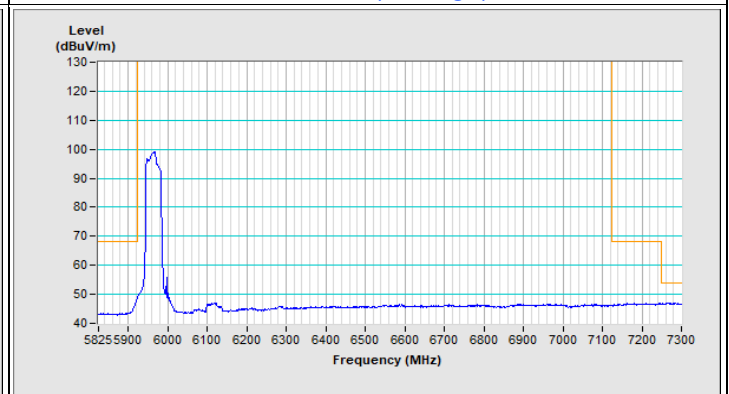


Vertical (Average)


802.11be (EHT40) Beamforming Channel 227

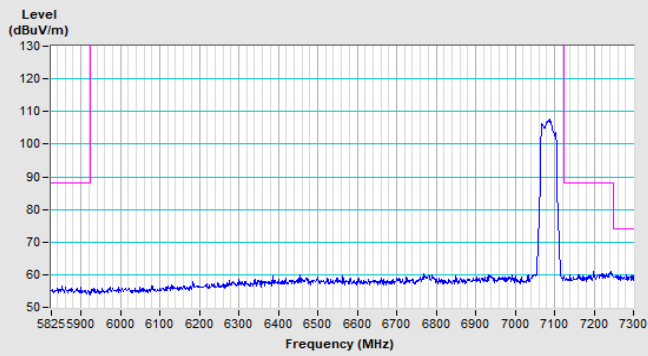


Horizontal (Peak)

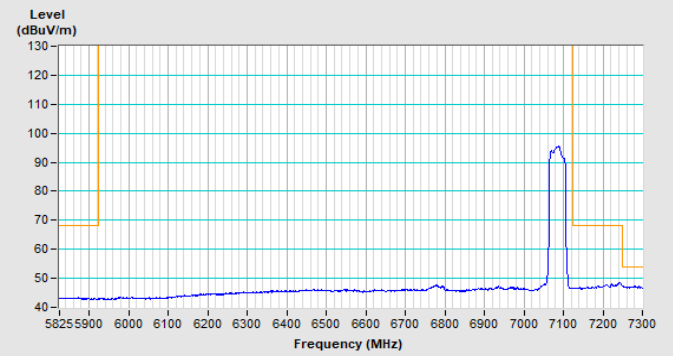

Horizontal (Average)

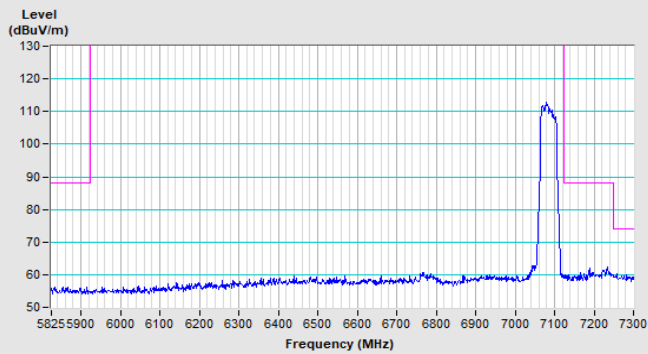


Vertical (Peak)

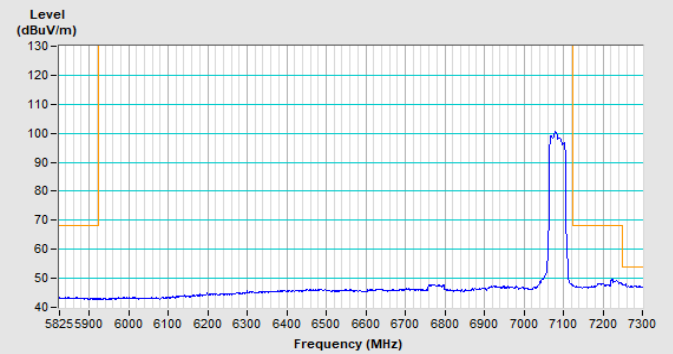


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Beamforming Channel 7

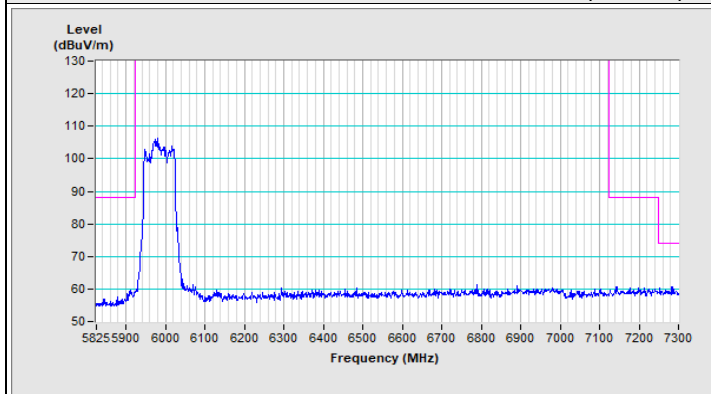


Horizontal (Peak)

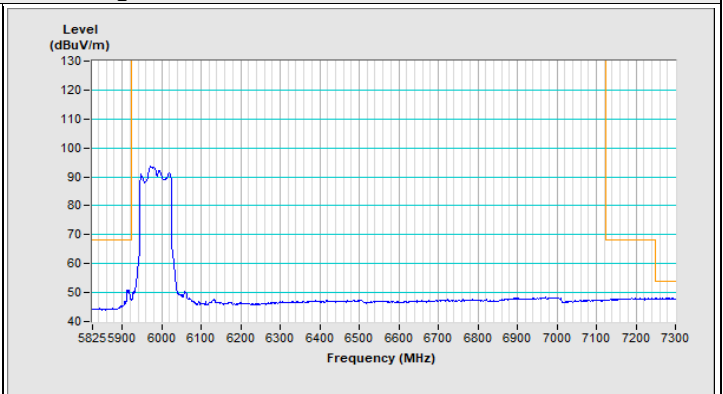

Horizontal (Average)

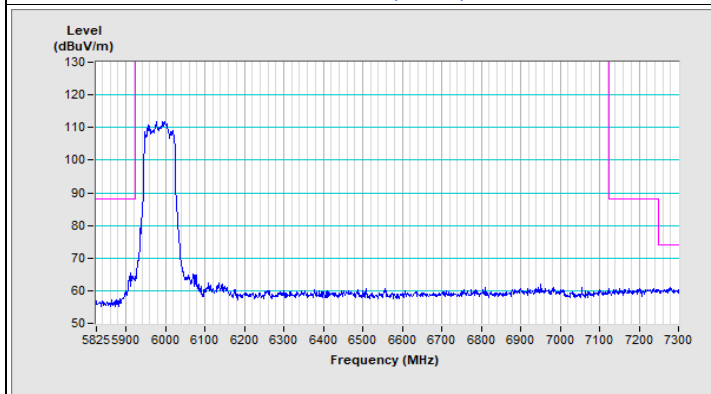


Vertical (Peak)

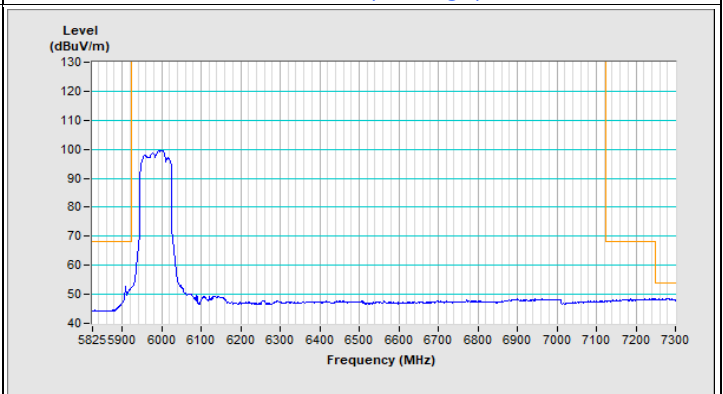


Vertical (Average)


802.11be (EHT80) Beamforming Channel 215

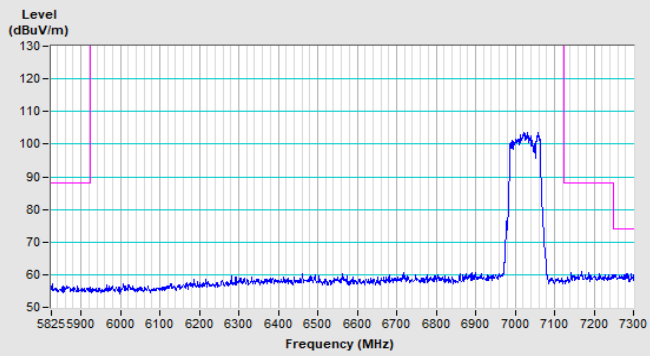


Horizontal (Peak)

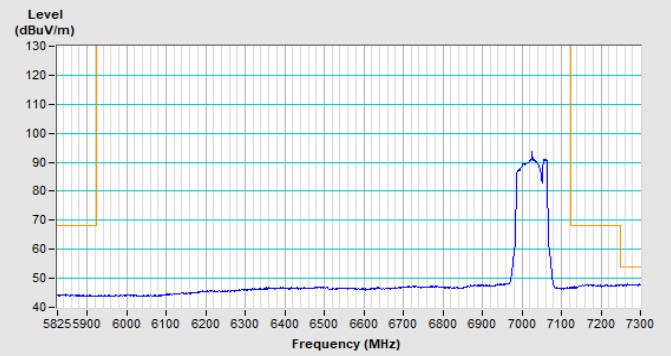

Horizontal (Average)

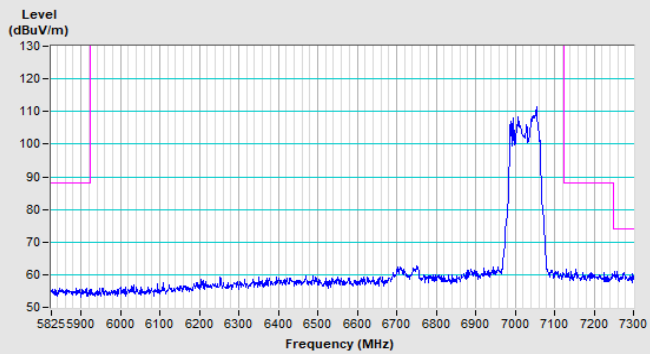





Vertical (Peak)

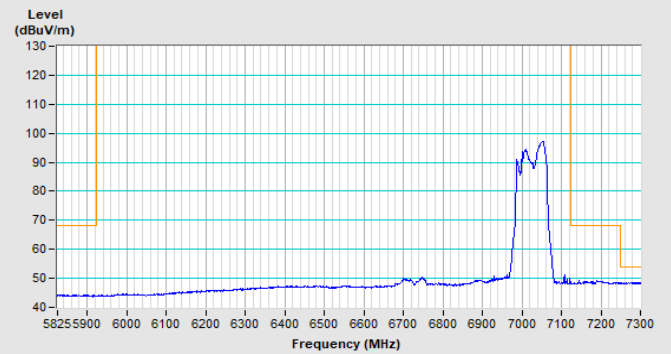


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Beamforming Channel 15

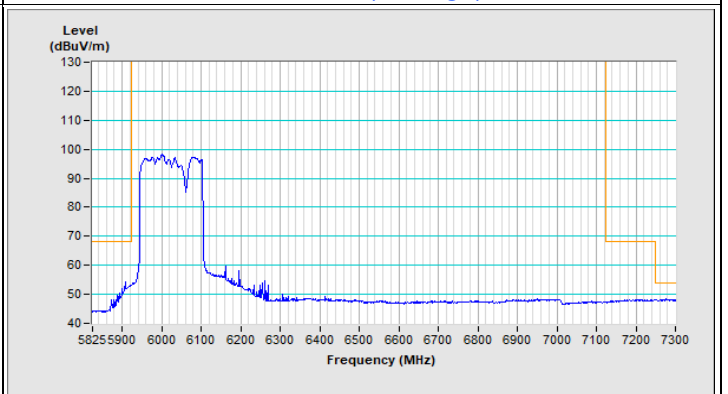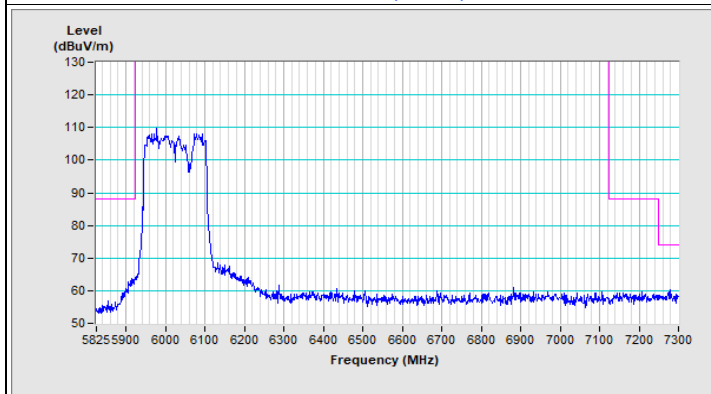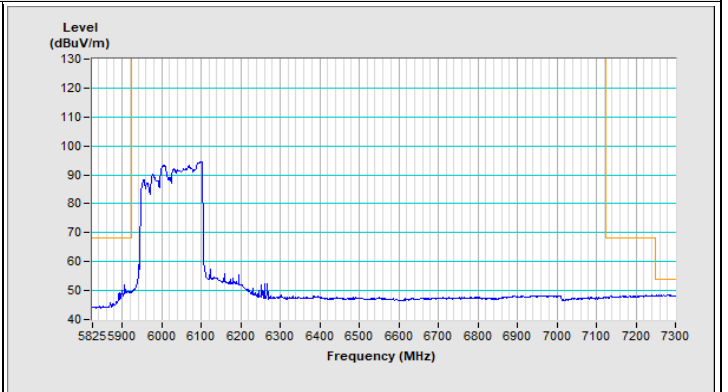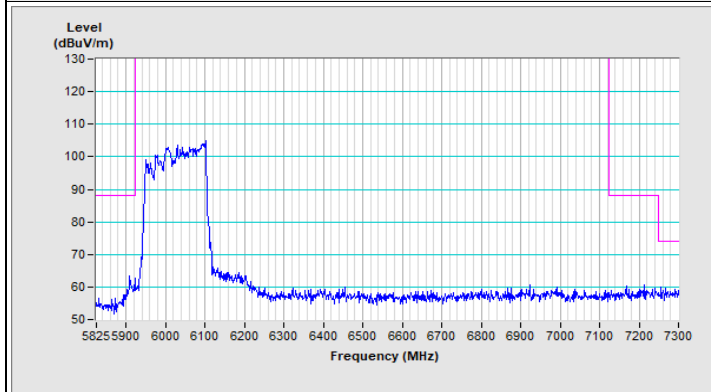


802.11be (EHT160) Beamforming Channel 207

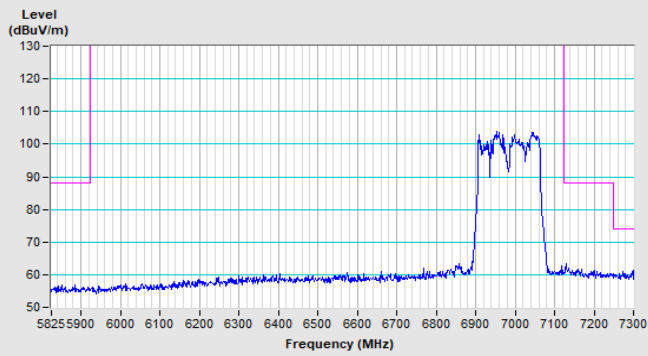


Horizontal (Peak)

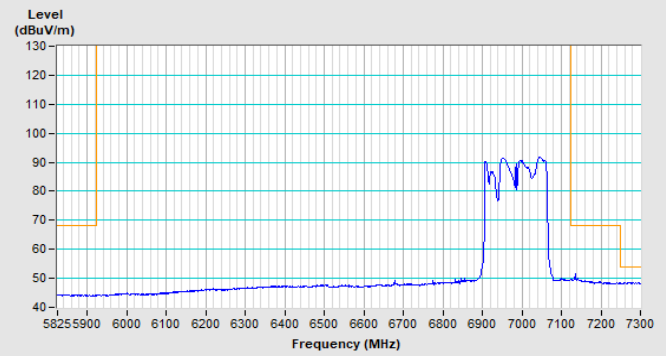

Horizontal (Average)

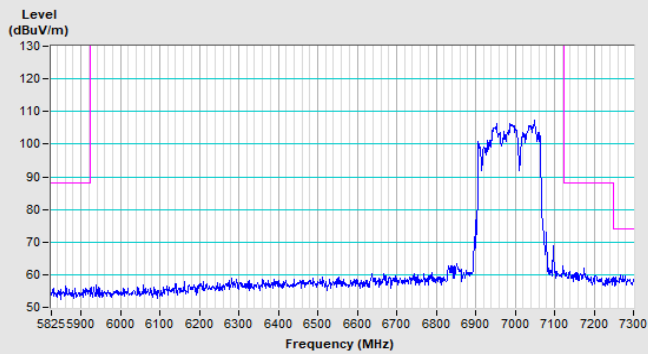


Vertical (Peak)

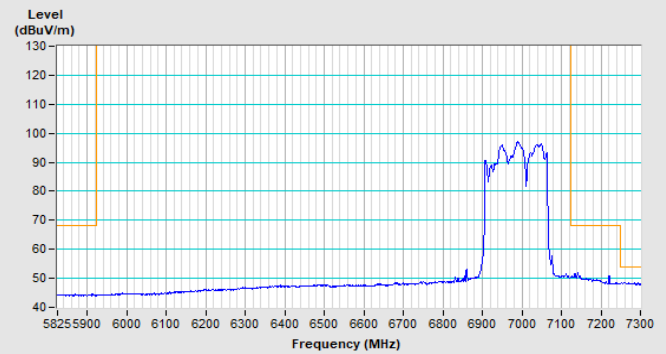


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Beamforming Channel 31

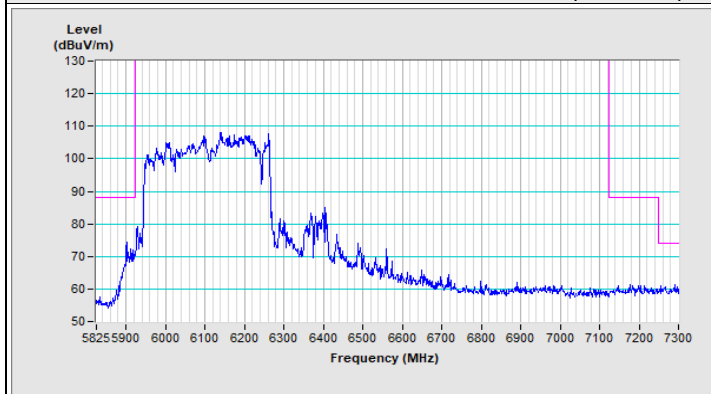


Horizontal (Peak)

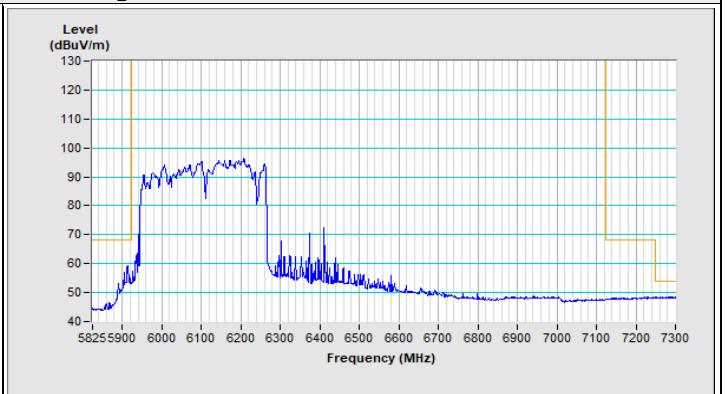

Horizontal (Average)

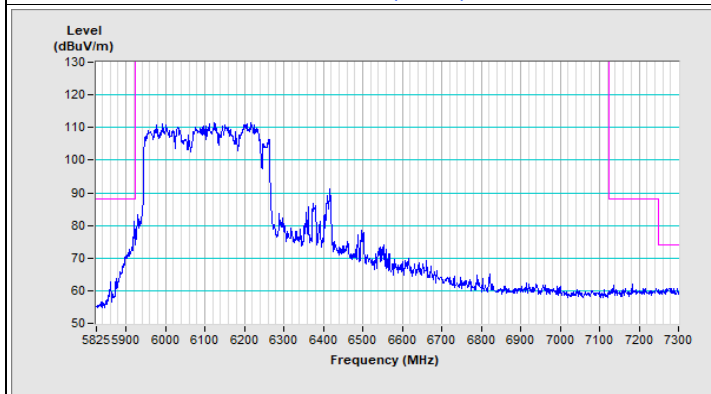


Vertical (Peak)

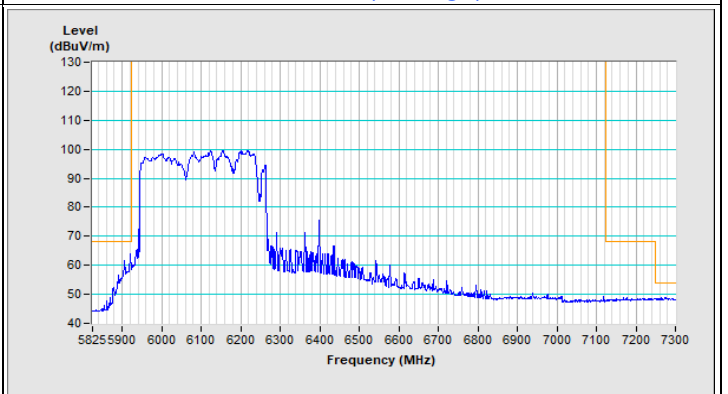


Vertical (Average)


802.11be (EHT320) Beamforming Channel 191

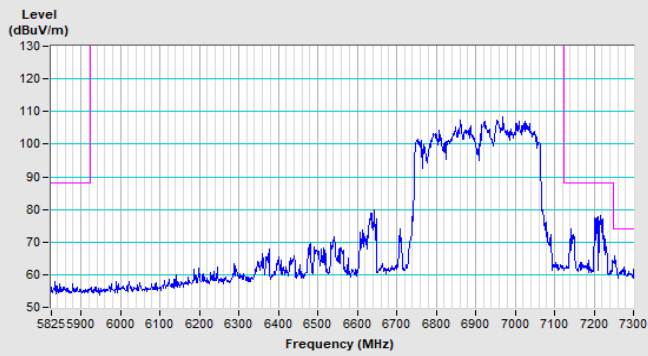


Horizontal (Peak)

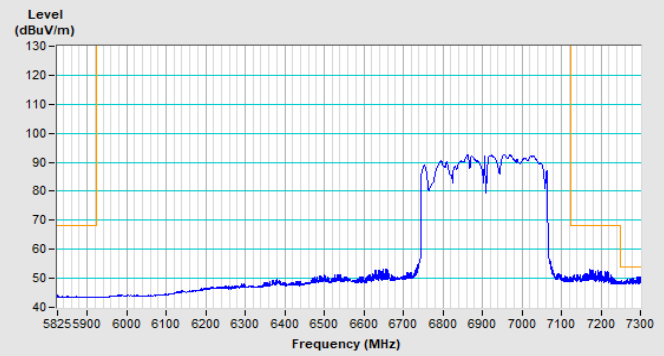

Horizontal (Average)

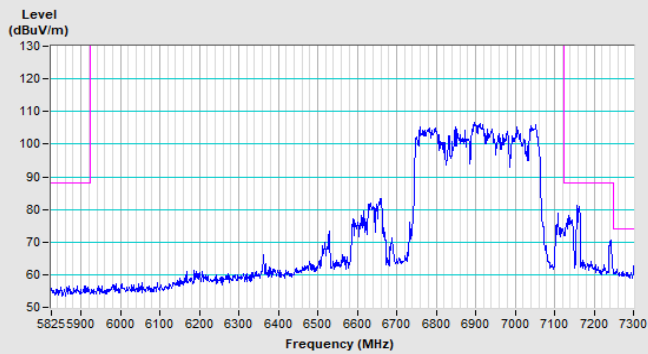


Vertical (Peak)

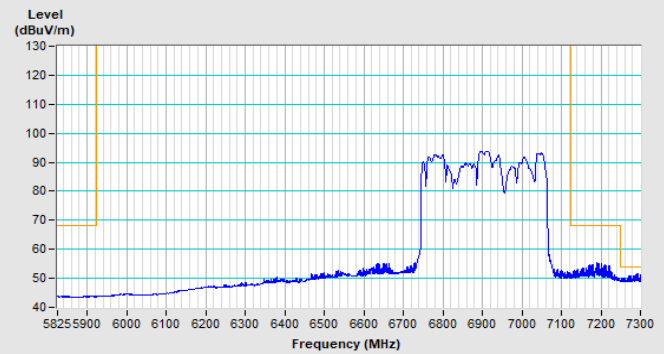


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Punctured by 20 MHz Channel 7

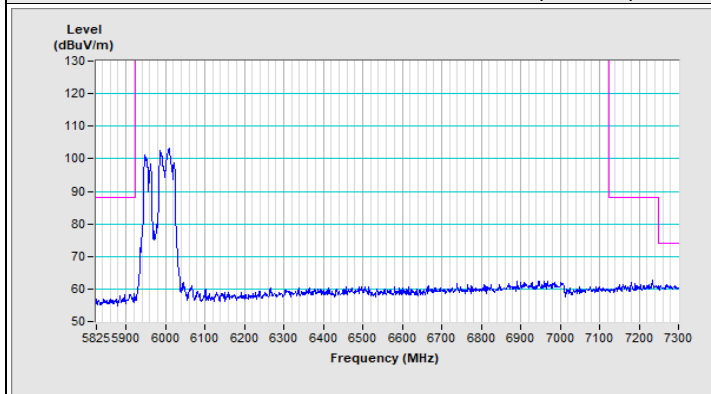


Horizontal (Peak)

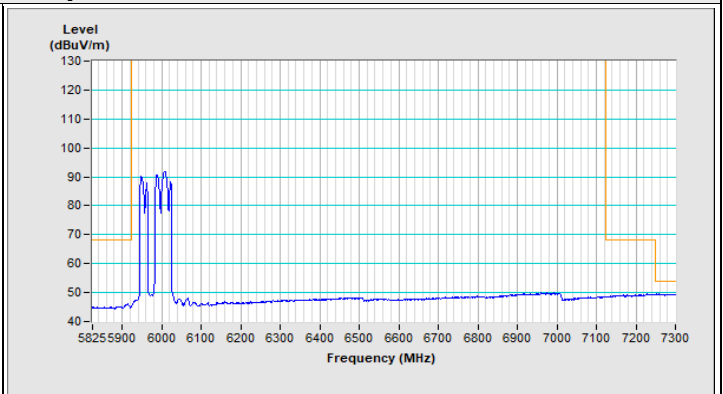

Horizontal (Average)

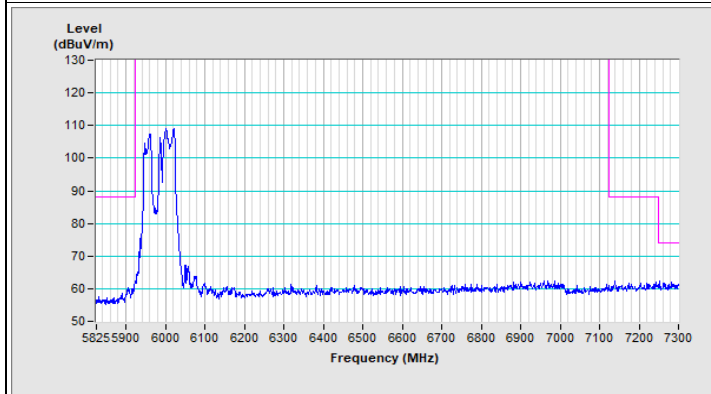


Vertical (Peak)

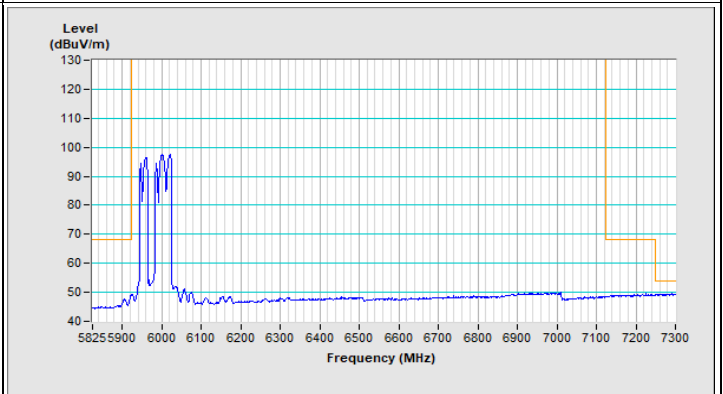


Vertical (Average)


802.11be (EHT80) Punctured by 20 MHz Channel 215

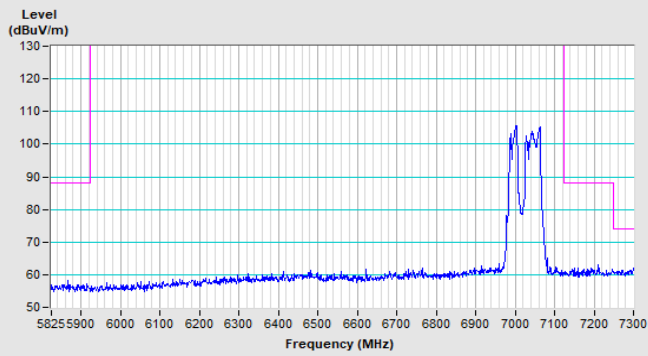


Horizontal (Peak)

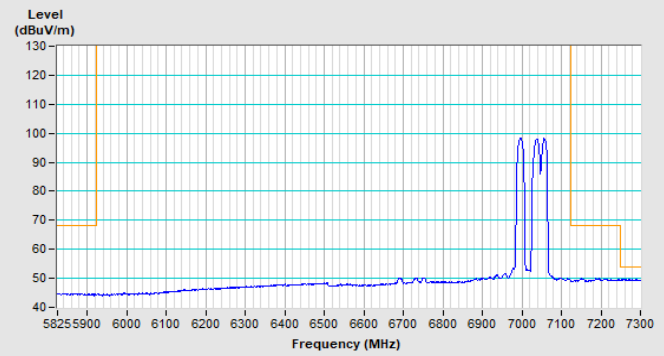

Horizontal (Average)

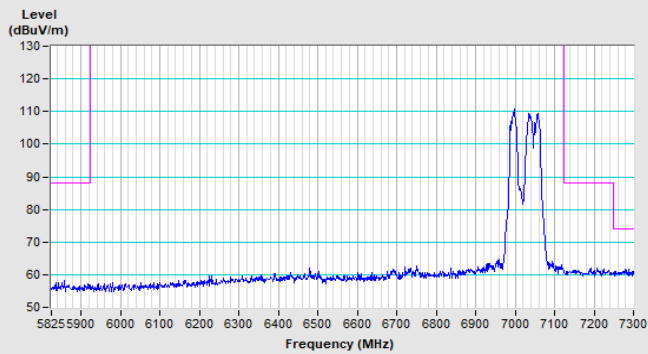


Vertical (Peak)

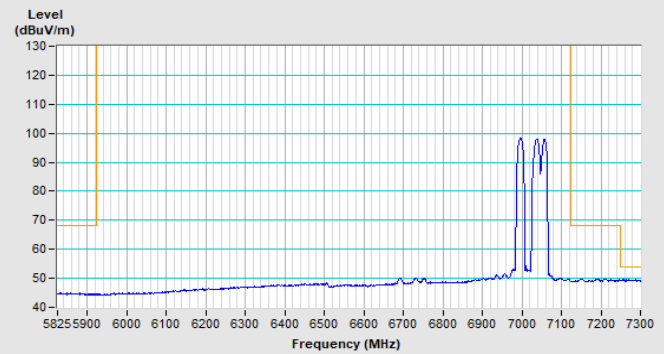


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Punctured by 20 MHz Channel 15

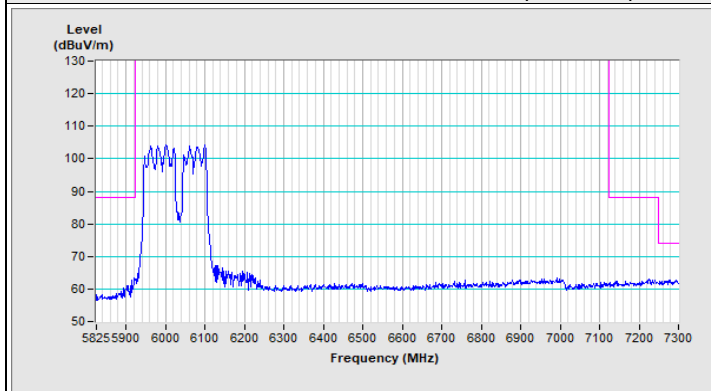


Horizontal (Peak)

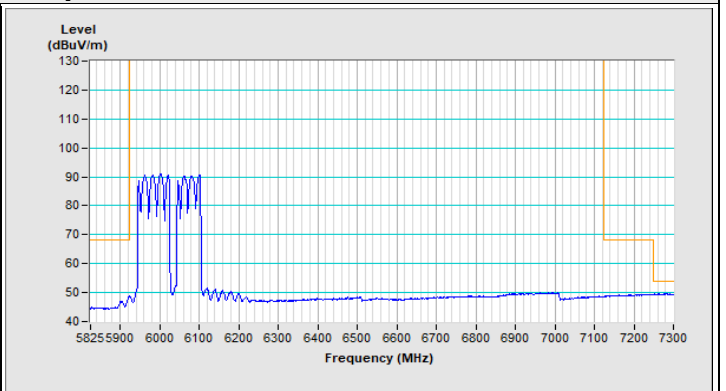

Horizontal (Average)

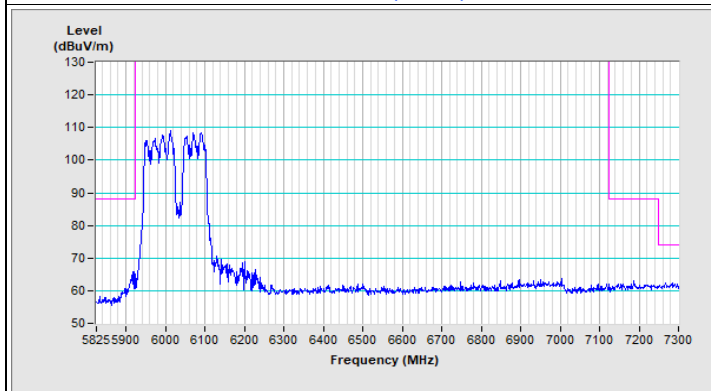


Vertical (Peak)

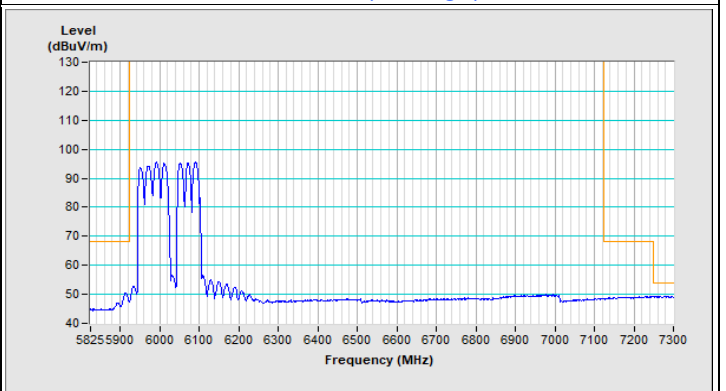


Vertical (Average)


802.11be (EHT160) Punctured by 20 MHz Channel 207

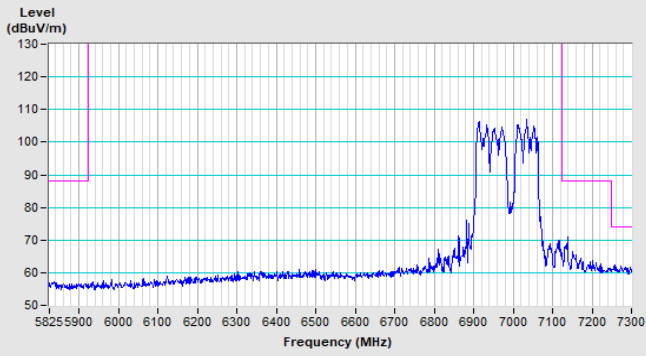


Horizontal (Peak)

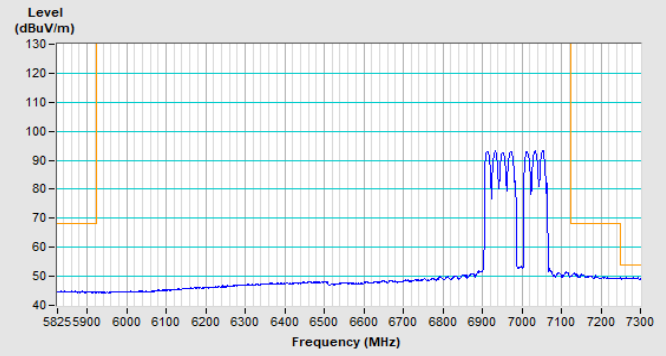

Horizontal (Average)

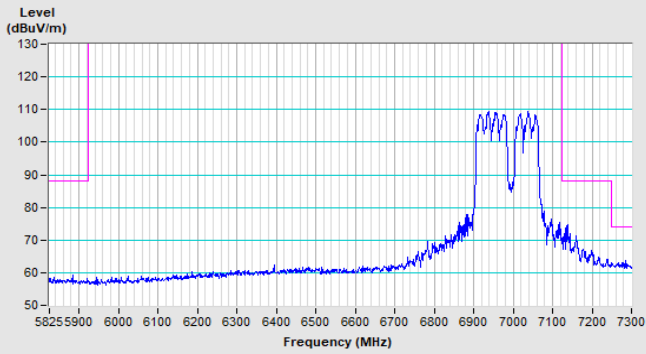


Vertical (Peak)

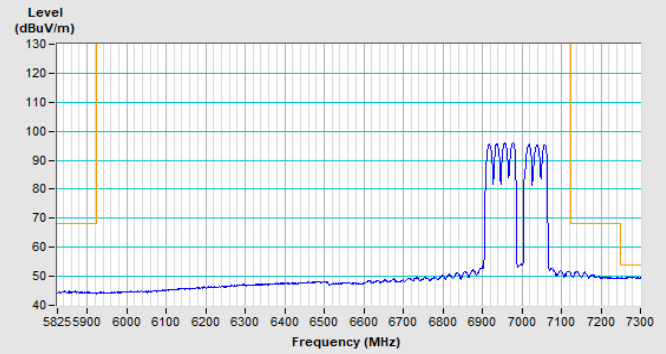


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Punctured by 40 MHz Channel 15

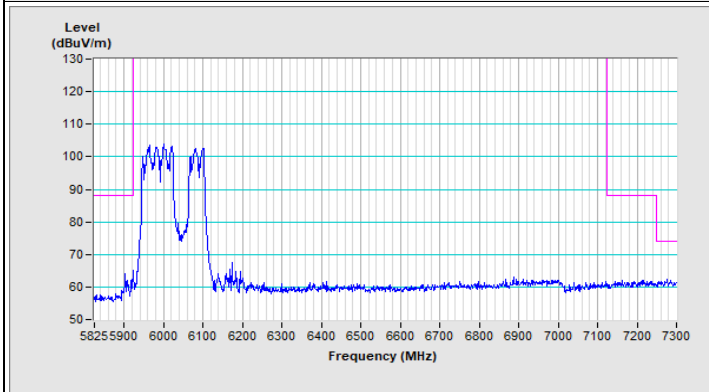


Horizontal (Peak)

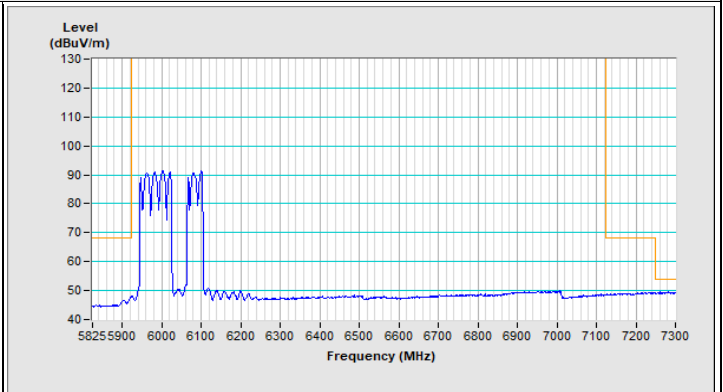

Horizontal (Average)

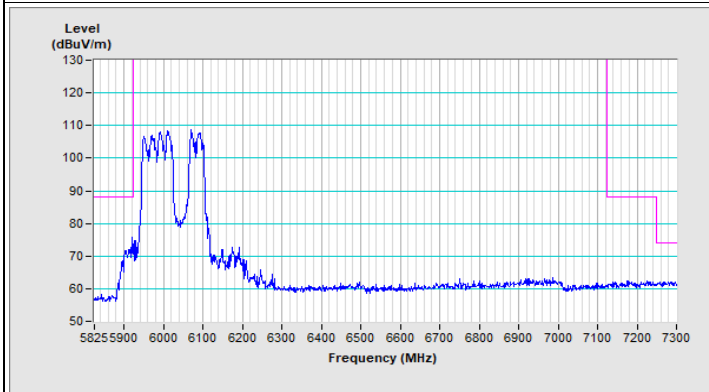


Vertical (Peak)

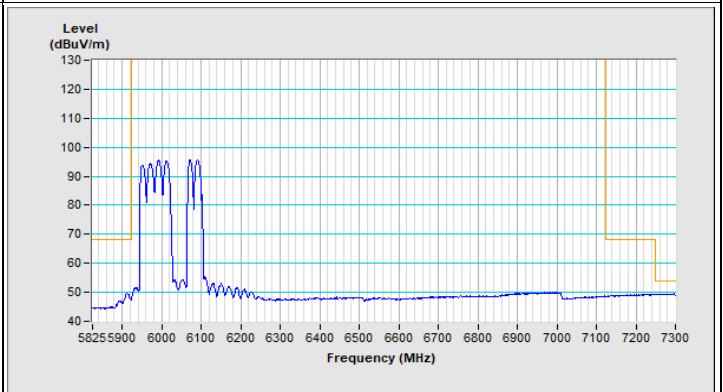


Vertical (Average)


802.11be (EHT160) Punctured by 40 MHz Channel 207

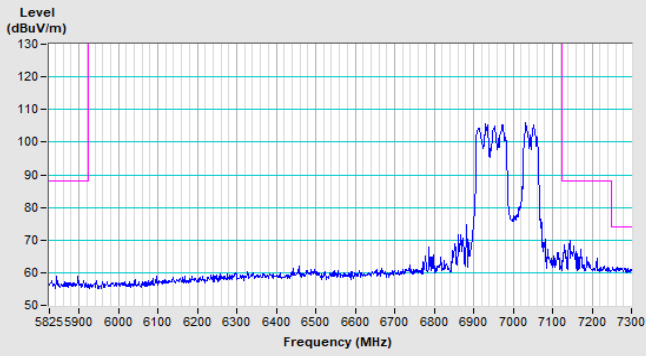


Horizontal (Peak)

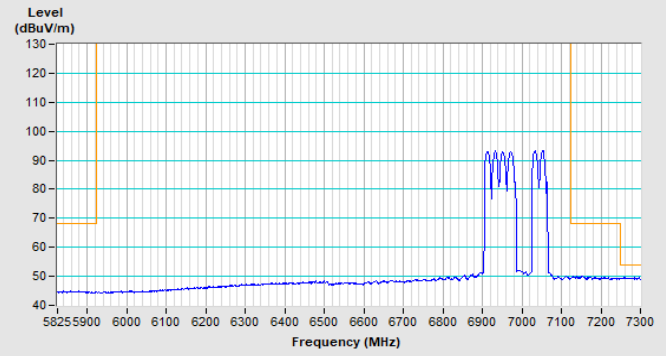

Horizontal (Average)

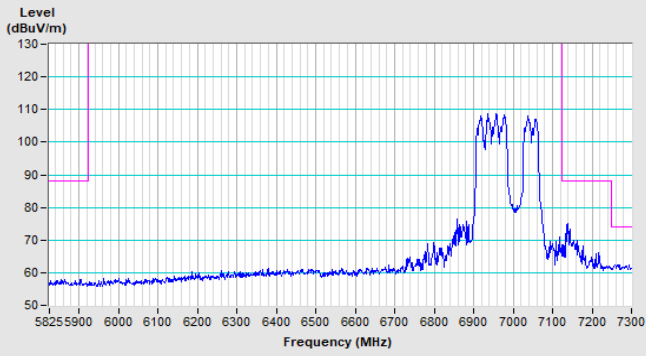


Vertical (Peak)

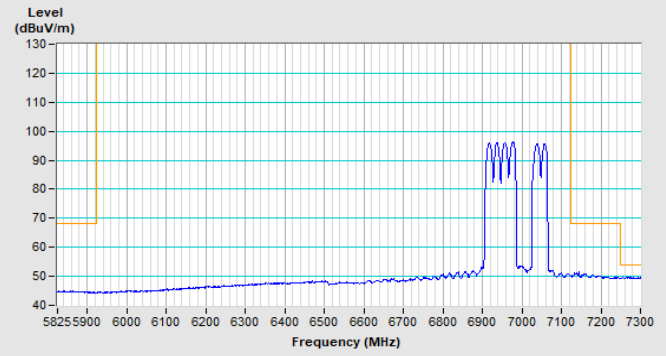


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Punctured by 40 MHz Channel 31

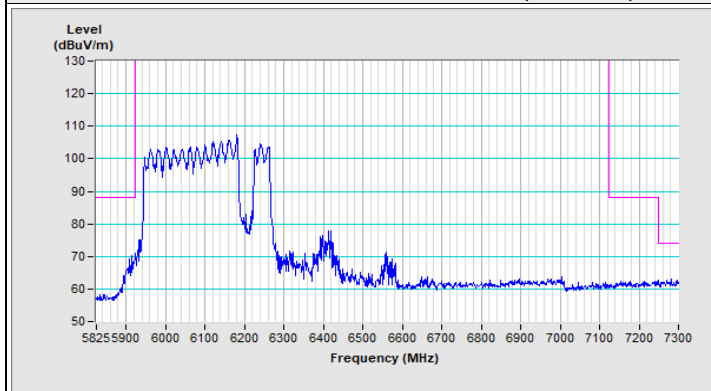


Horizontal (Peak)

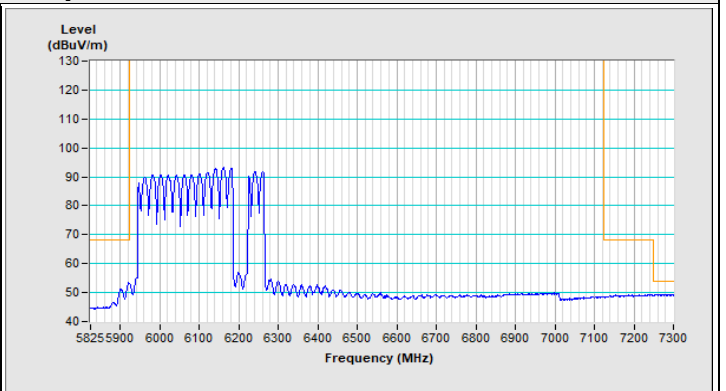

Horizontal (Average)

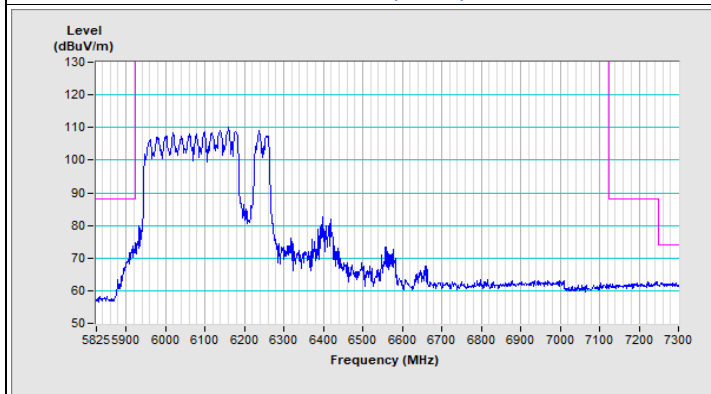


Vertical (Peak)

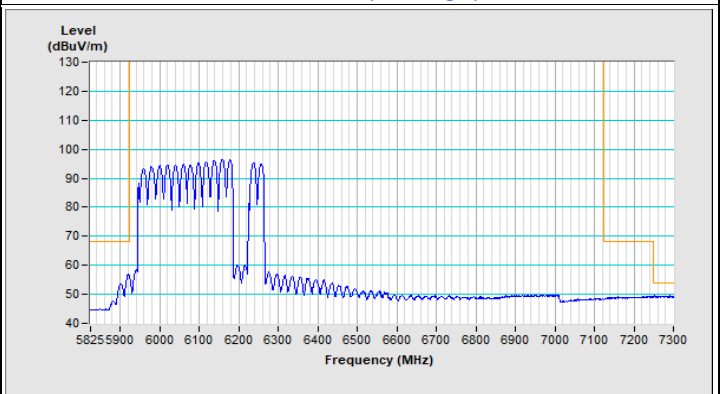


Vertical (Average)


802.11be (EHT320) Punctured by 40 MHz Channel 191

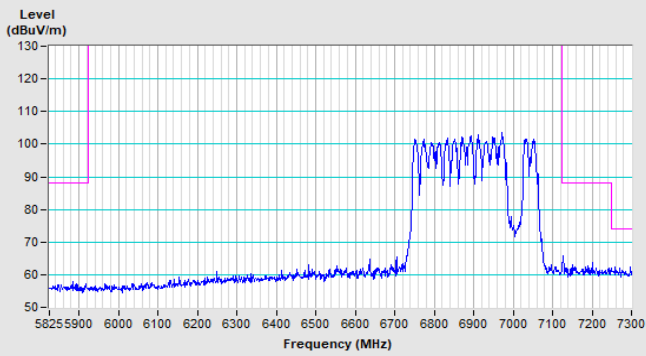


Horizontal (Peak)

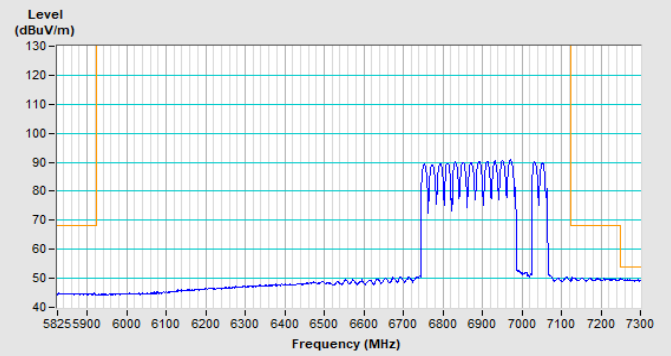

Horizontal (Average)

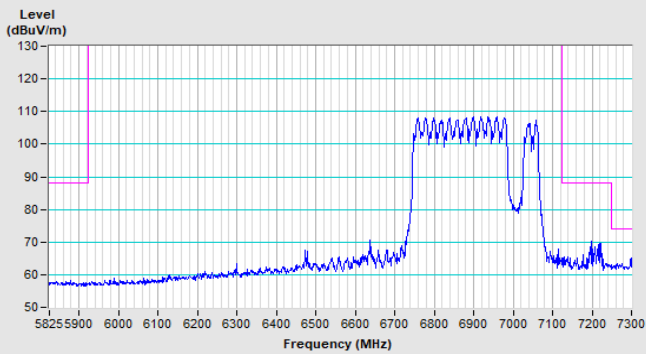


Vertical (Peak)

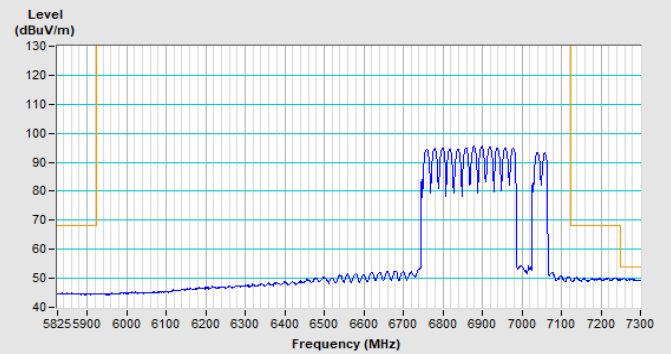


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Punctured by 80 MHz Channel 31

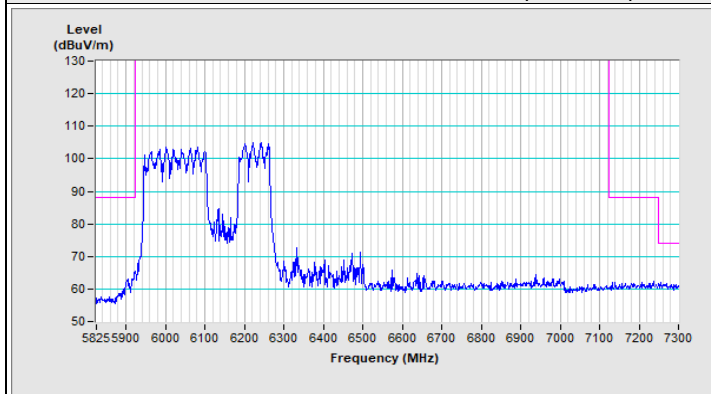


Horizontal (Peak)

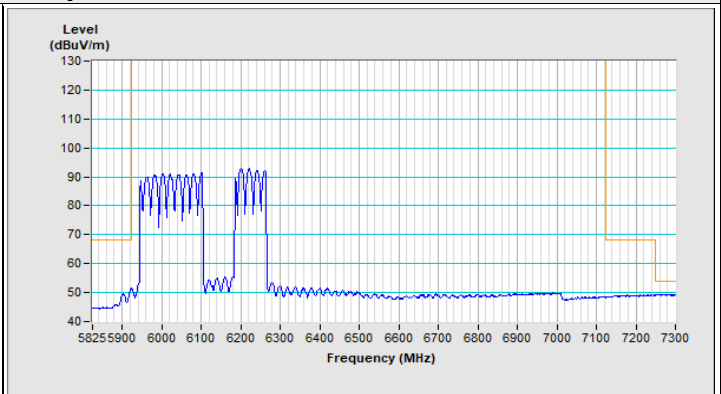

Horizontal (Average)

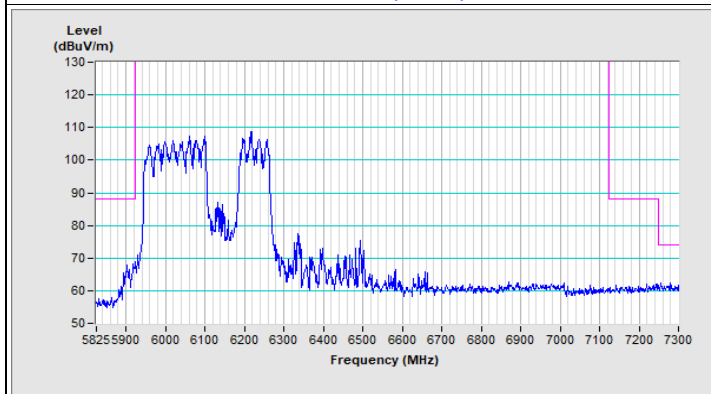


Vertical (Peak)

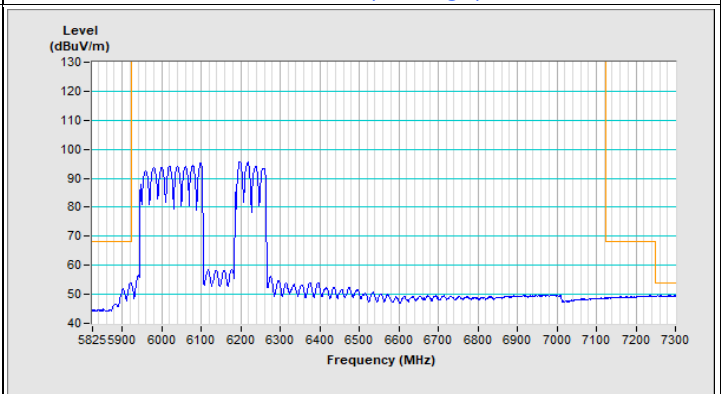


Vertical (Average)


802.11be (EHT320) Punctured by 80 MHz Channel 191

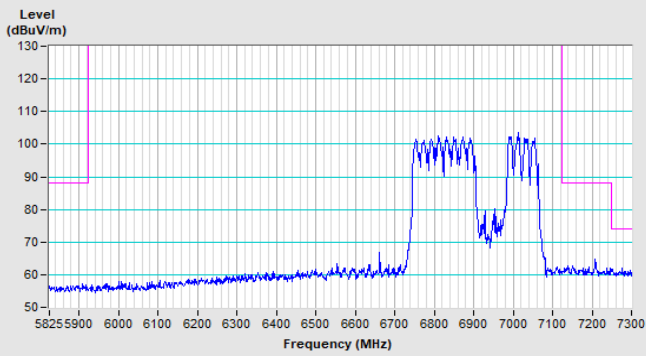


Horizontal (Peak)

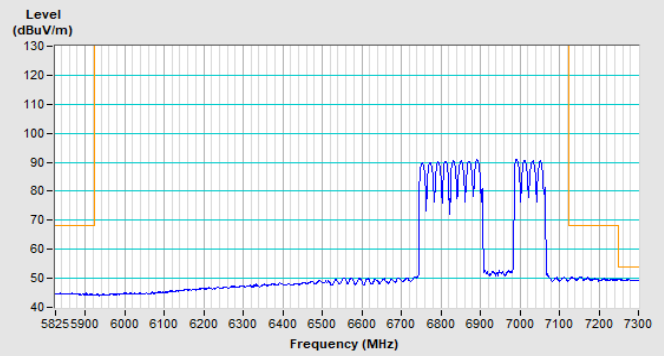

Horizontal (Average)

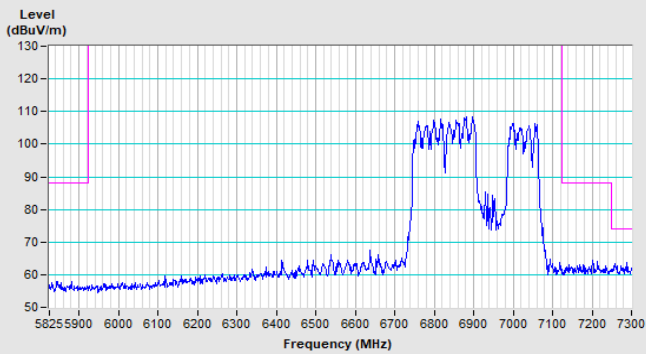


Vertical (Peak)

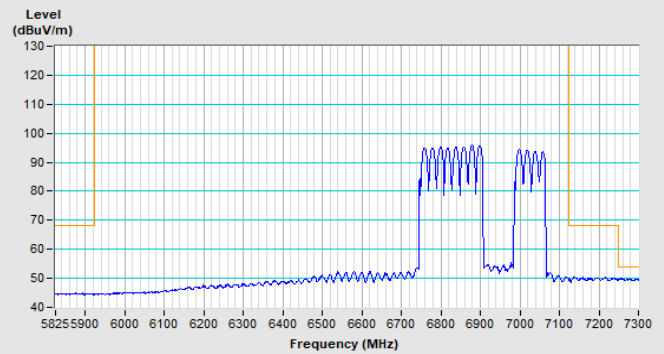


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Punctured by 80+40 MHz Channel 31

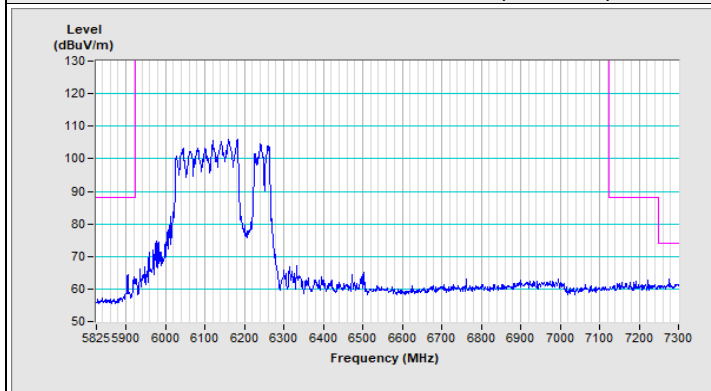


Horizontal (Peak)

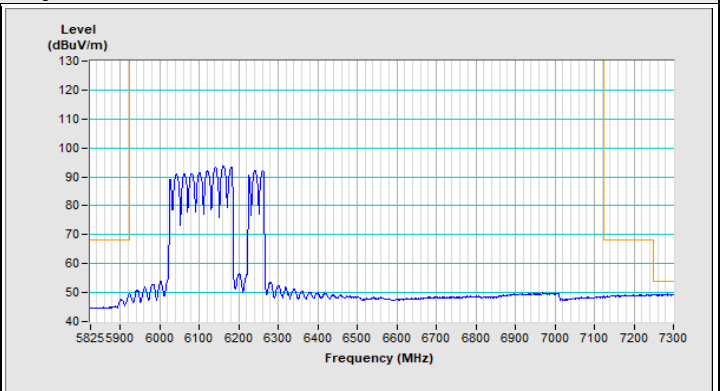

Horizontal (Average)

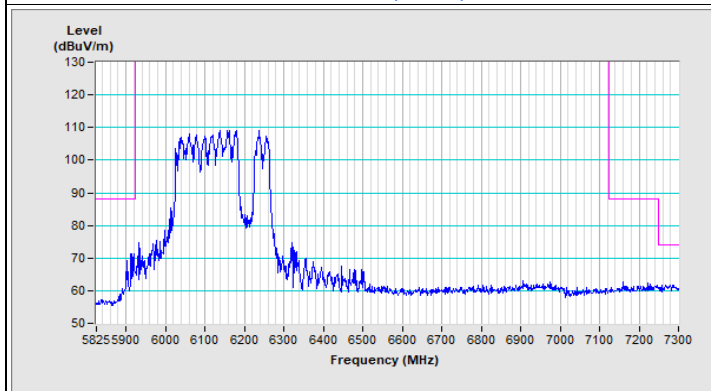


Vertical (Peak)

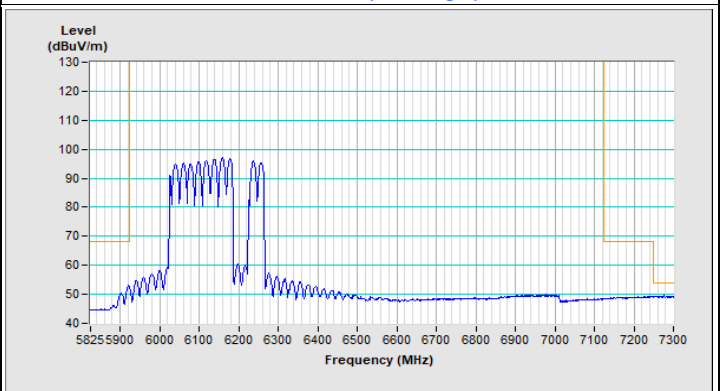


Vertical (Average)


802.11be (EHT320) Punctured by 80+40 MHz Channel 191

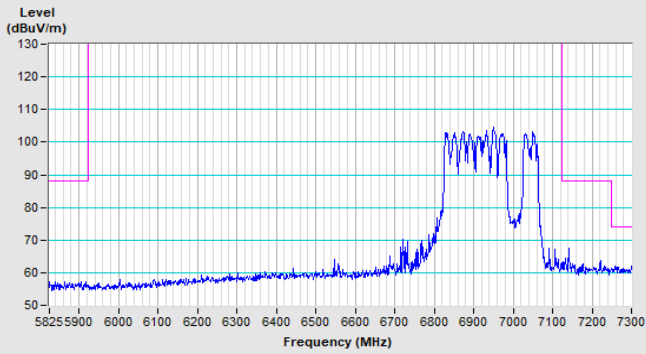


Horizontal (Peak)

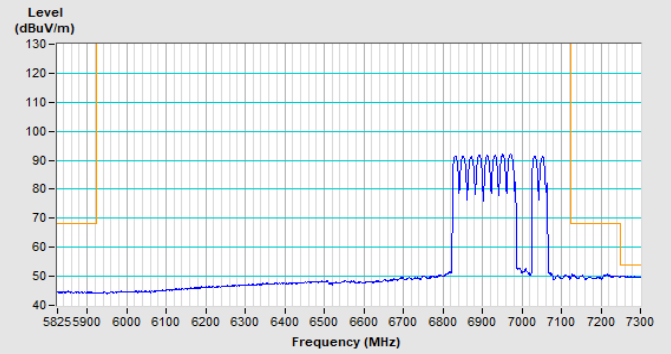

Horizontal (Average)

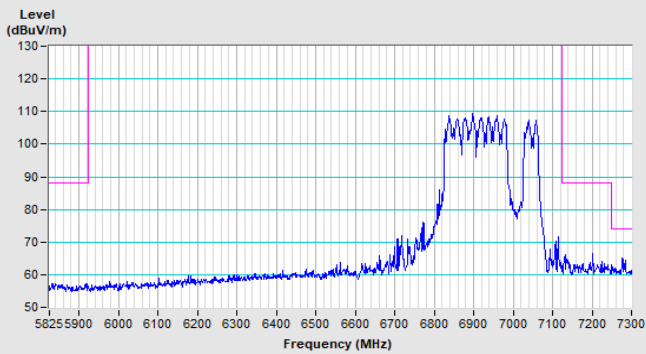

Vertical (Peak)

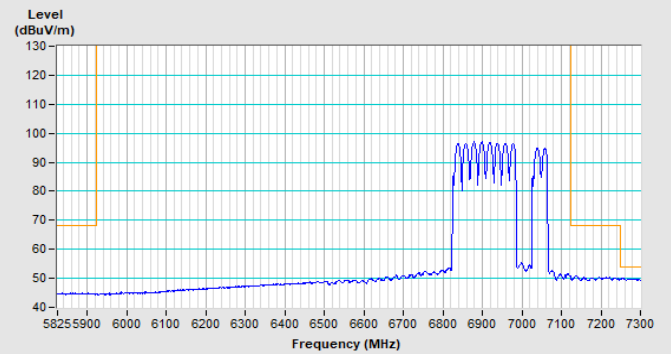


Vertical (Average)

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11a Channel 149

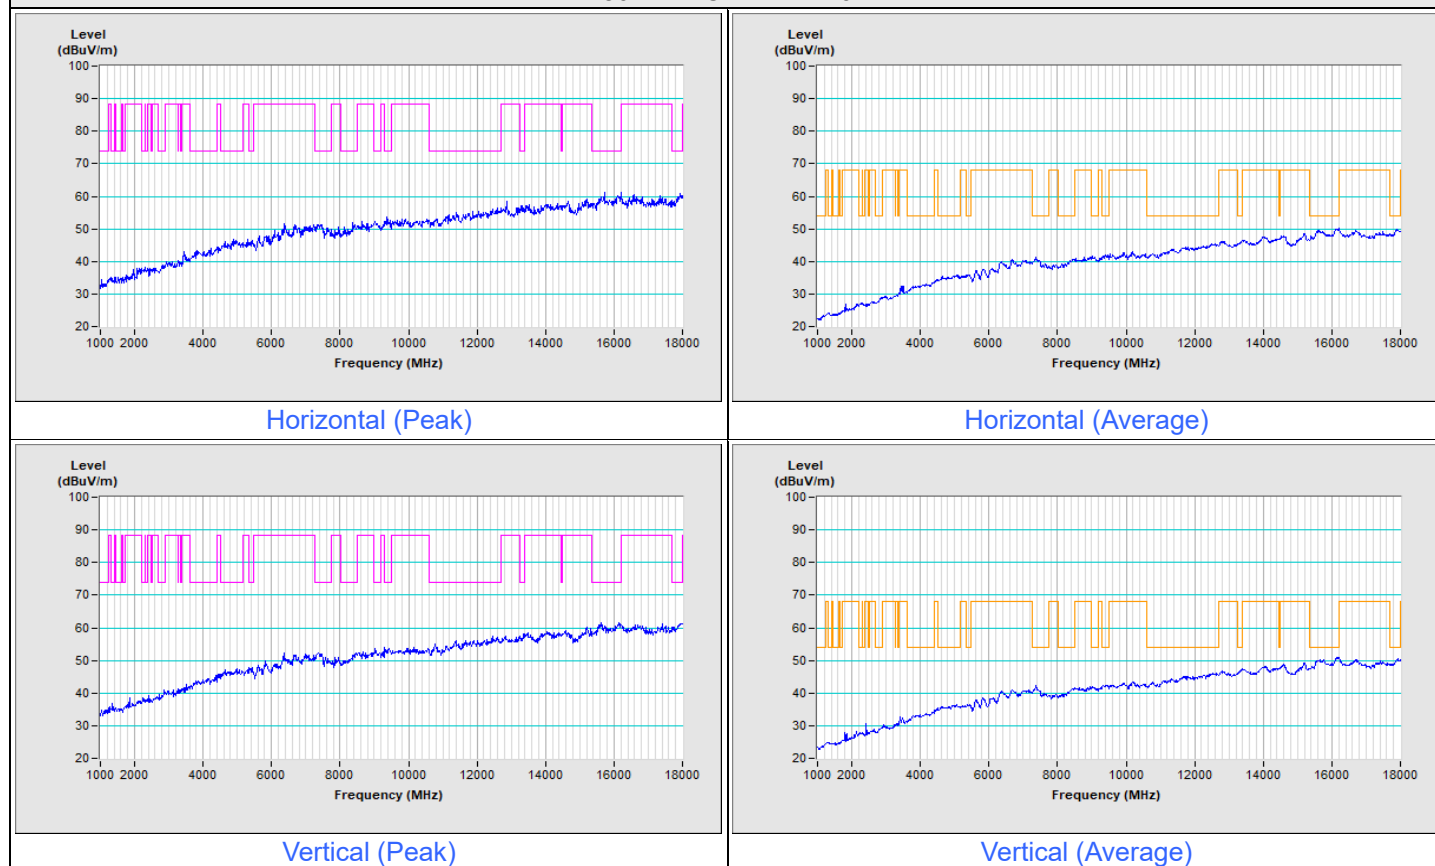


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT20) Beamforming Channel 45

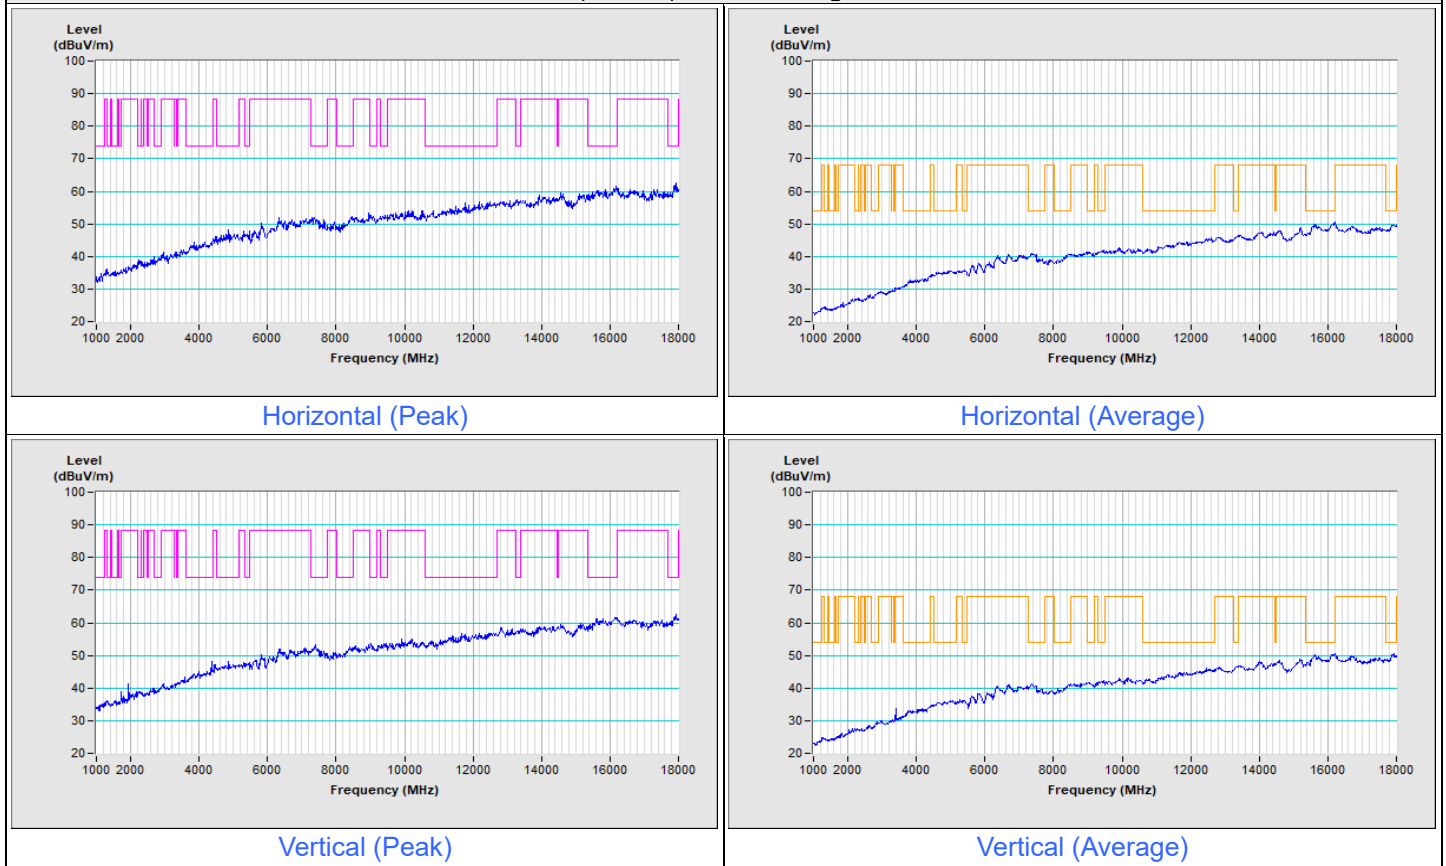


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT40) Beamforming Channel 43

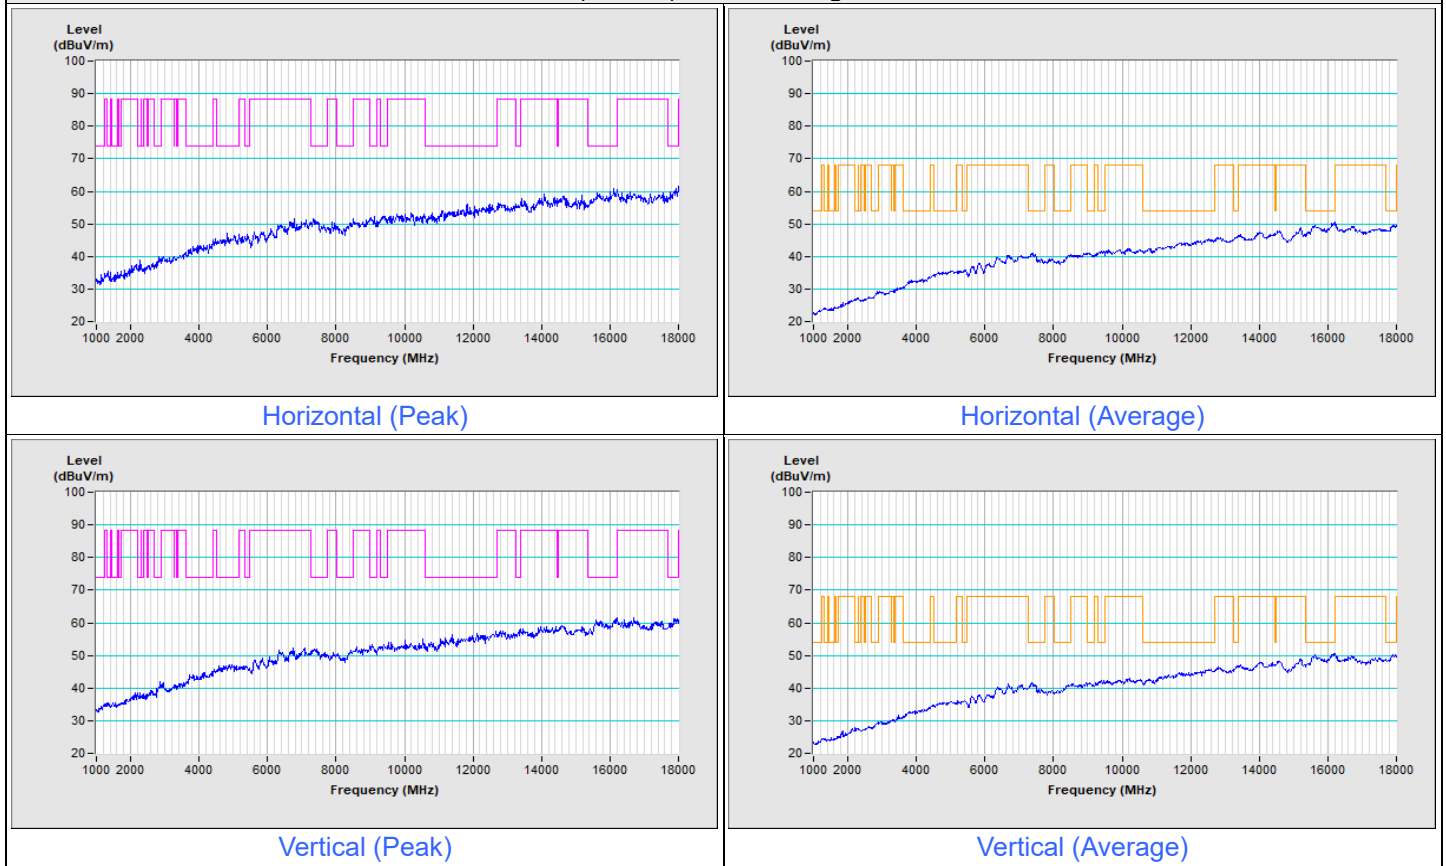


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT80) Beamforming Channel 39

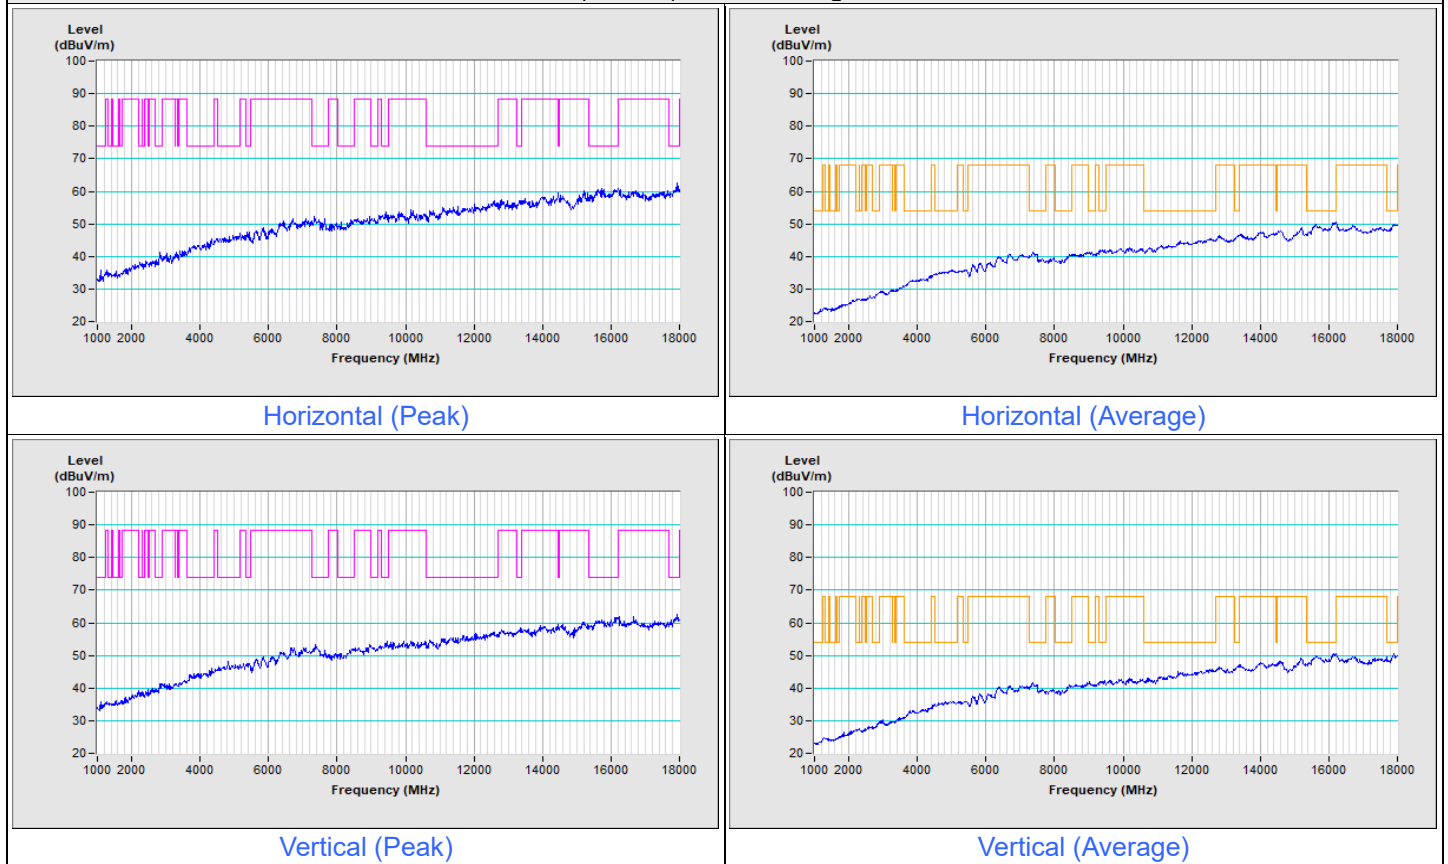


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT160) Beamforming Channel 79

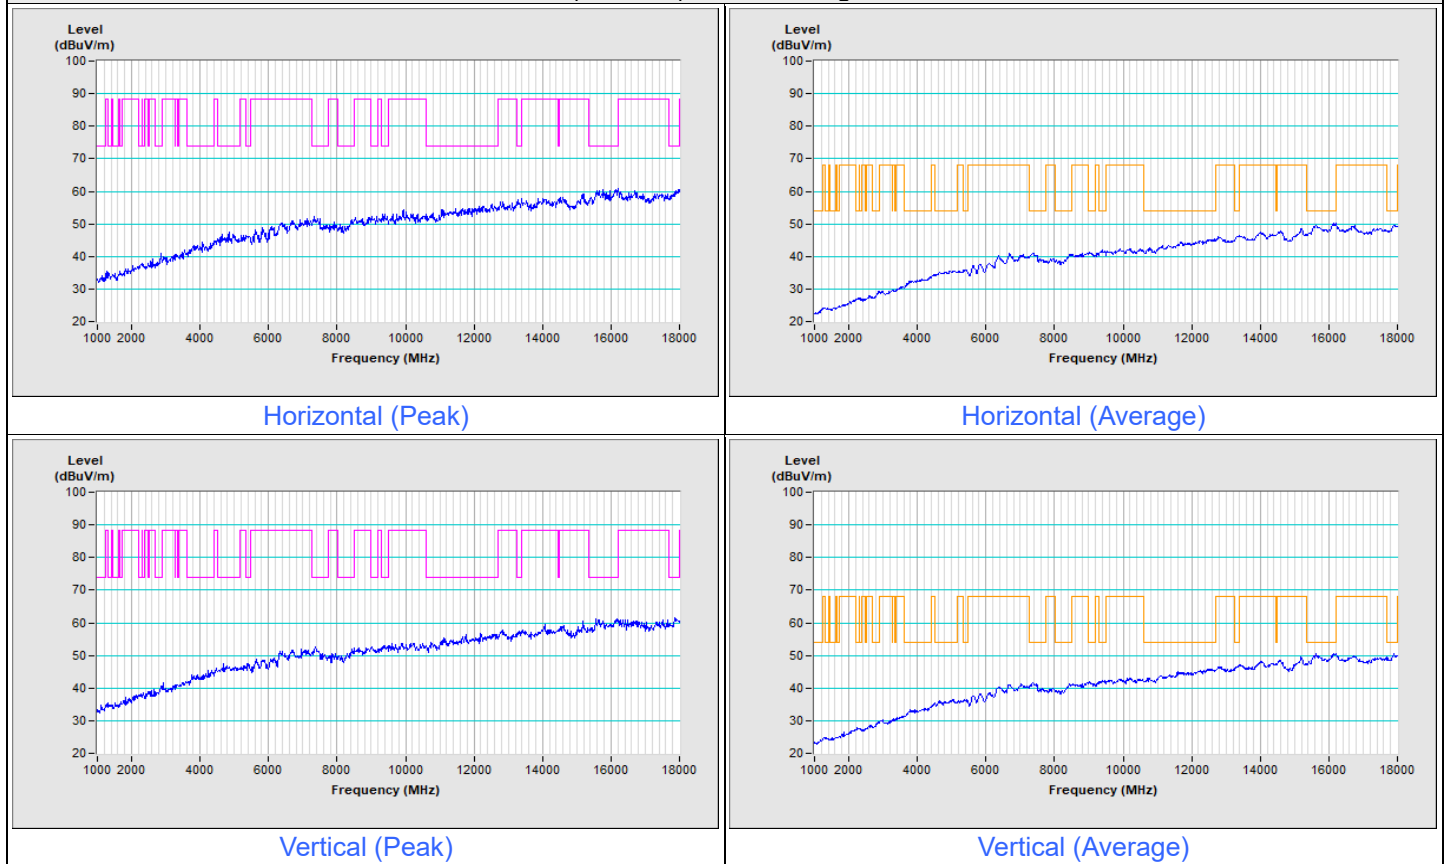


Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 MHz, DET=RMS
-----------------	----------------	-------------------------------	---

802.11be (EHT320) Beamforming Channel 63

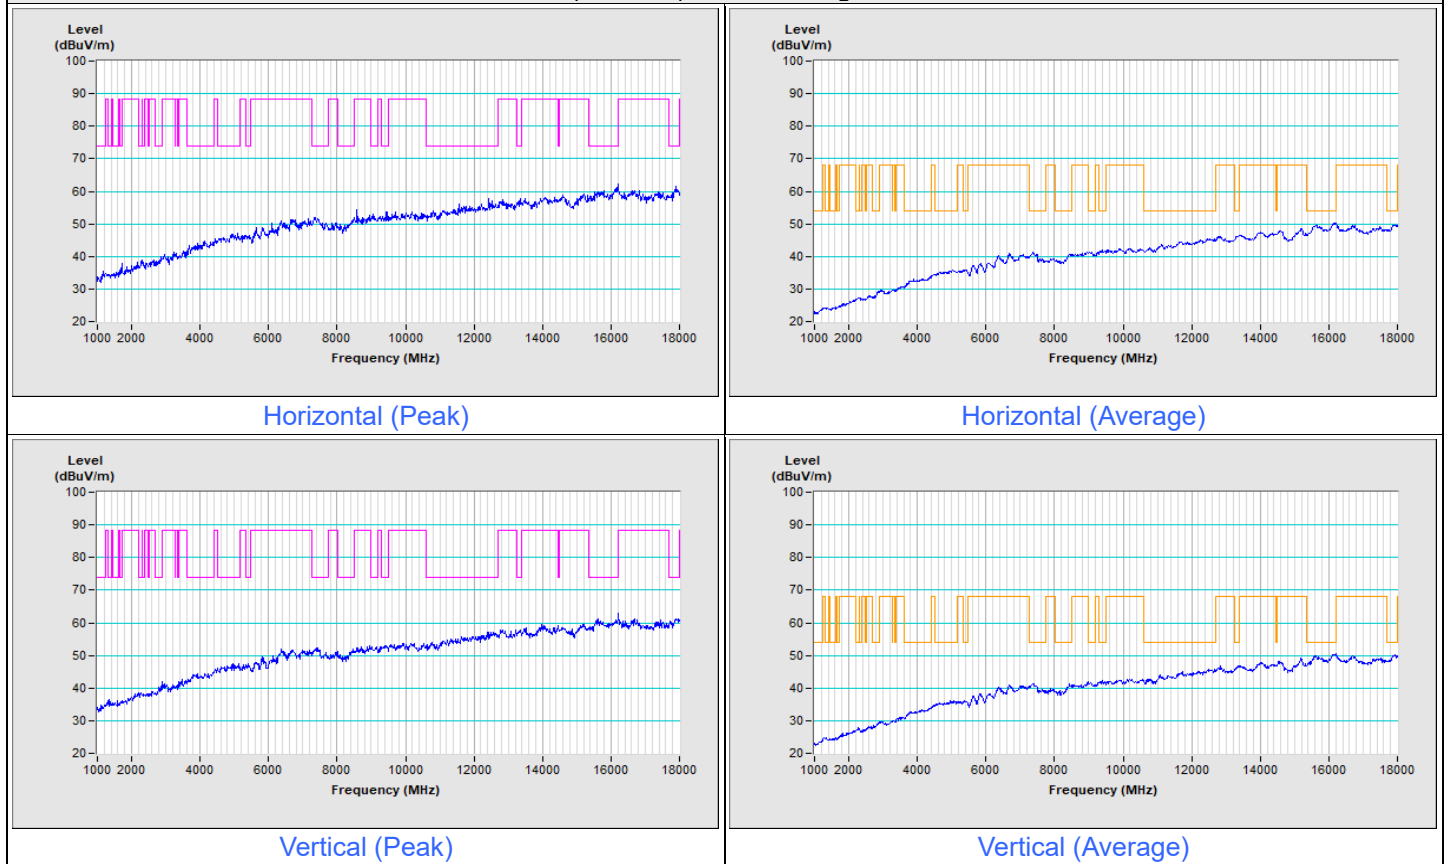

Notes:

1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---