


Exhibit C
RE114 Internal Photos





SINGLE STATION SMOKE ALARM WITH
SUPPLEMENTAL HEAT ALARM

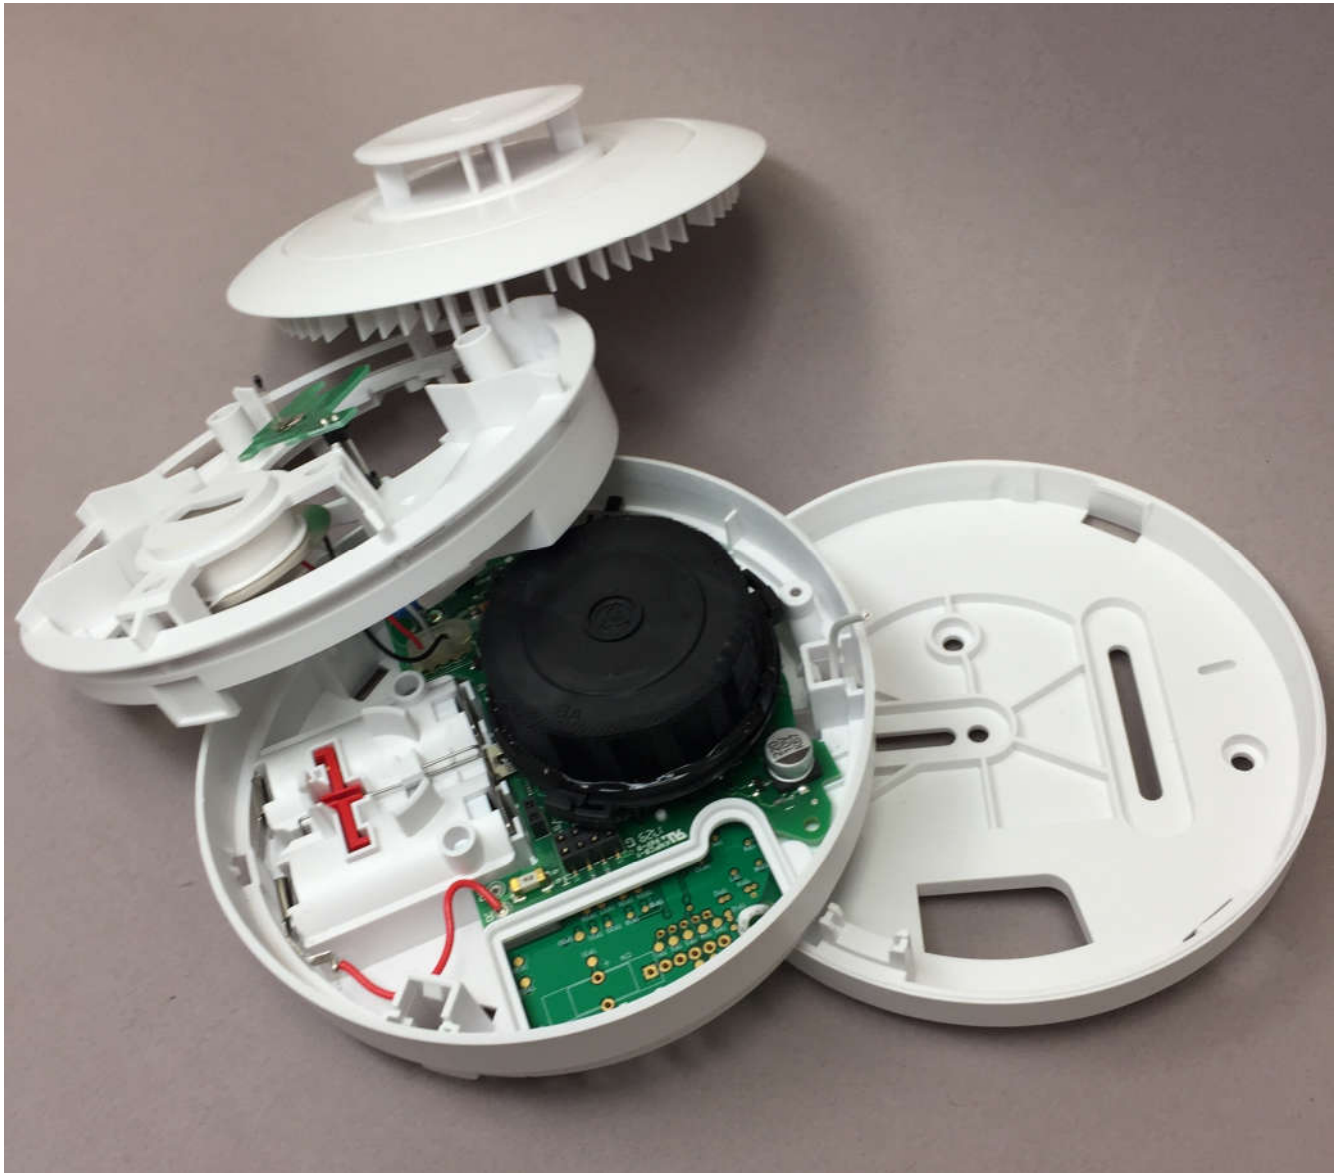

WARNING

PLEASE SEE USER MANUAL FOR IMPORTANT INFORMATION ON MAINTENANCE AND BATTERY LIFE. CONSTANT USE AT HIGH OR LOW TEMPERATURE OR HIGH HUMIDITY MAY REDUCE BATTERY LIFE. USE ONLY BATTERIES SPECIFIED. THE USE OF OTHER BATTERIES MAY HAVE A DETRIMENTAL EFFECT ON ALARM OPERATION. MAINTENANCE: CLEAN ALARM MONTHLY BY GENTLY VACUUMING THE OPENINGS IN THE EXTERIOR OF THE ALARM.

STANDBY: NO BEEP OR FLASH
LOW BATTERY: 1 BEEP + 1 YELLOW FLASH EVERY 48 SEC
ALARM: 3 LONG BEEPS, REPEATING WITH FLASHING RED LED
END OF LIFE: 3 BEEPS WITH 3 YELLOW FLASHES
ALARM SILENCE: 1 RED FLASH EVERY 8 SECS
SENSITIVITY: $\pm 1.9\%$ - 4.0% OBSFT
CONFORMS TO UL STD 217
CERTIFIED TO ULC STD S531
FOR SERVICING, RETURN TO:
RESOLUTION PRODUCTS, INC.
1402 HEGGEN STREET
HUDSON, WI 54016

48-0024-02_RevA

EN FRANÇAIS



Model RE114
Smoke and Heat Alarm, GE
FCC ID: USX-RE114
IC ID: 8310A-RE114
Manual: 47-0023-01_RevA
Date: 17303





PULL THIS TAB



55-0083-01 RevA00

Daughter
Board

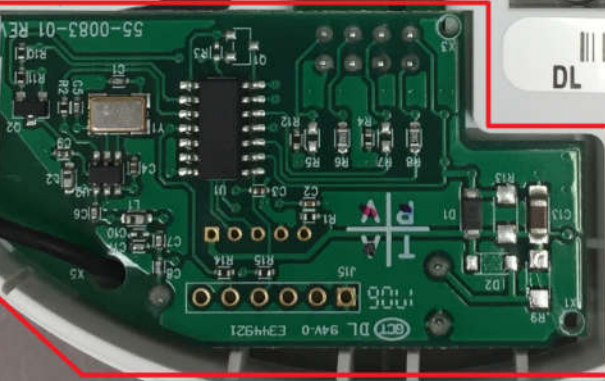

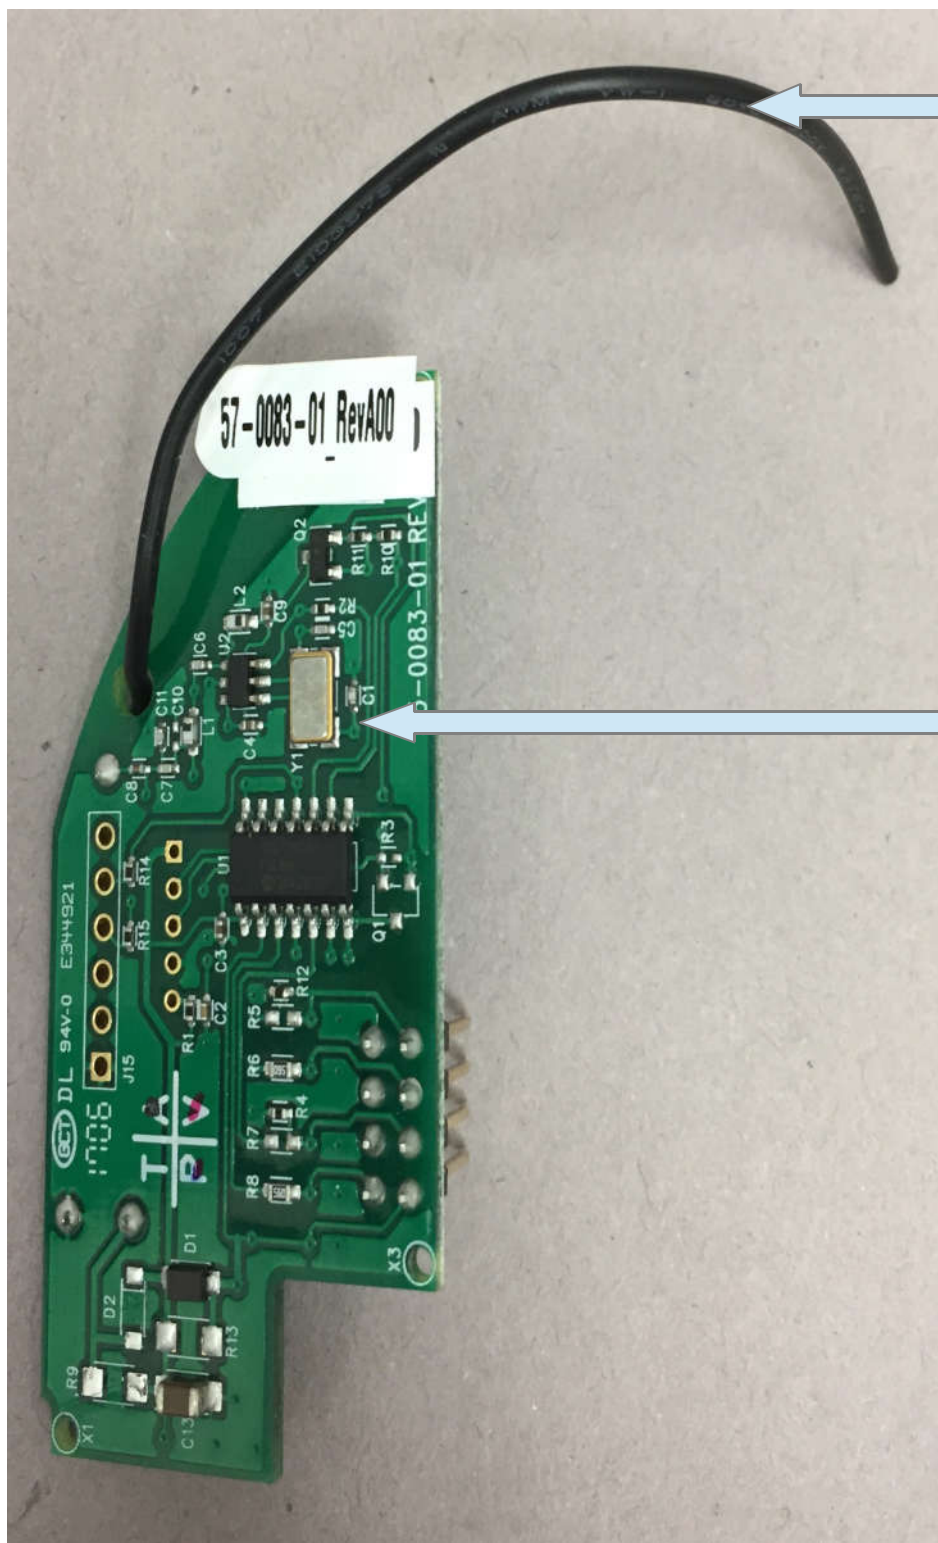

Antenna

Transmitter Ckt

