


Exhibit C

RE214 Internal Photos



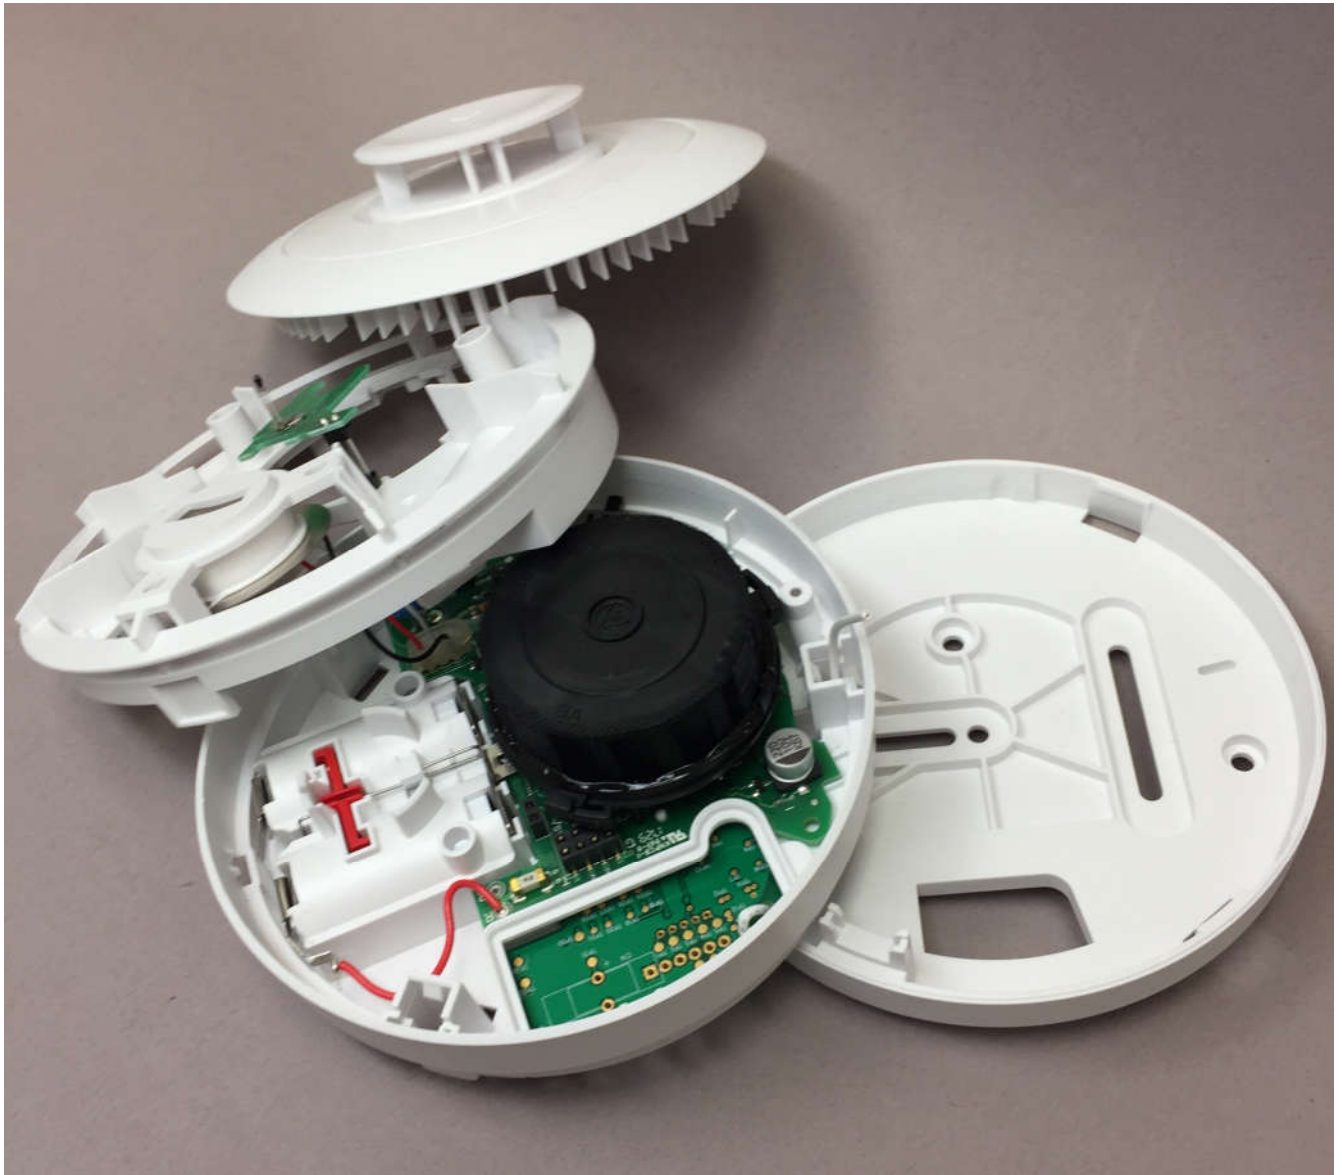

SINGLE STATION SMOKE ALARM WITH
SUPPLEMENTAL HEAT ALARM

WARNING

PLEASE SEE USER MANUAL FOR IMPORTANT INFORMATION ON MAINTENANCE
AND BATTERY LIFE. CONSTANT USE AT HIGH OR LOW TEMPERATURE OR HIGH
HUMIDITY MAY REDUCE BATTERY LIFE. USE ONLY BATTERIES SPECIFIED.
THE USE OF OTHER BATTERIES MAY HAVE A DETRIMENTAL EFFECT ON ALARM
OPERATION. MAINTENANCE: CLEAN ALARM MONTHLY BY GENTLY VACUUMING
THE OPENINGS IN THE EXTERIOR OF THE ALARM.

STANDBY: NO BEEP OR FLASH

LOW BATTERY: 1 BEEP + 1 YELLOW FLASH EVERY 48 SEC

ALARM: 3 LONG BEEPS, REPEATING WITH FLASHING RED LED

END OF LIFE: 3 BEEPS WITH 3 YELLOW FLASHES

ALARM SILENCE: 1 RED FLASH EVERY 8 SECS

SENSITIVITY: $\approx 1.95\% - 4.0\%$ OBSFT

CONFORMS TO UL STD 217

CERTIFIED TO ULC STD 5531

FOR SERVICING, RETURN TO:

RESOLUTION PRODUCTS, INC.

1402 HEGGEN STREET

HUDSON, WI 54016

48-0024-02_RevA

EN FRANÇAIS



Model RE214

Smoke and Heat Alarm, HW

FCC ID: U5X-RE214

IC ID: 8310A-RE214

Manual: 47-0023-02_RevA

Date: 17283




PULL THIS TAB

SN 037-1883

48-0024-02_RevA

Daughter
Board

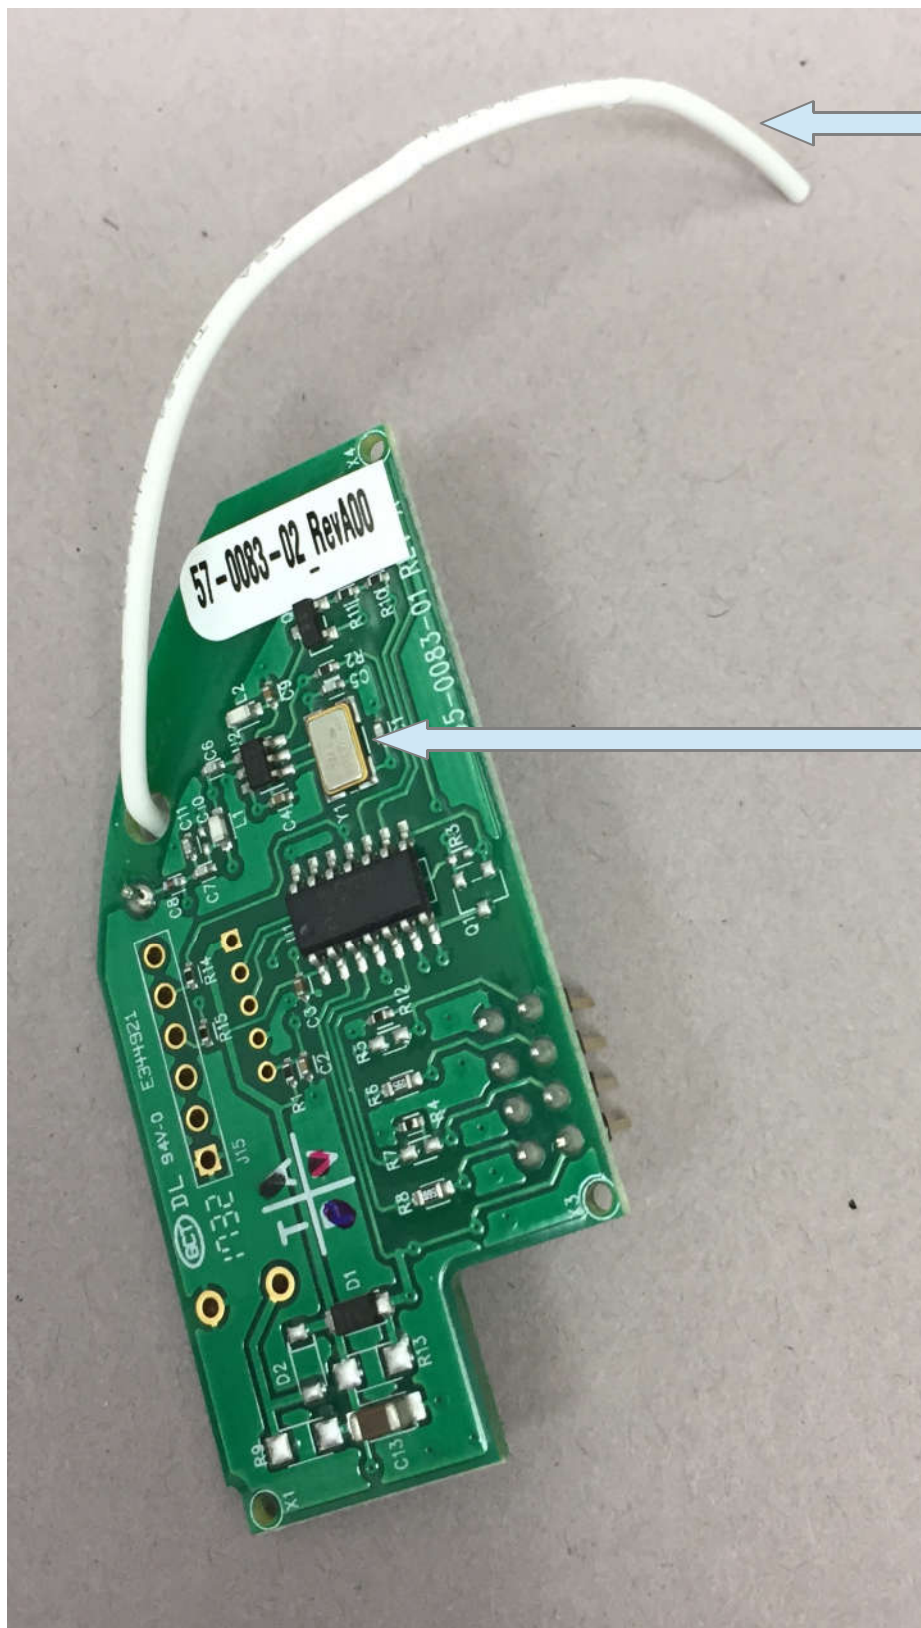

Antenna

Transmitter Ckt

