

GainForce Technology Co., Ltd

嘉光科技股份有限公司

5/3-

承認書

APPROVAL SHEET

品 名 : Antenna
MODEL NAME _____
料 號 : AT5020-B2R8HAAT/LF
PART NUMBER _____
客戶名稱 : 鴻邦電子
CUSTOMER _____
供 應 商 : GainForce
VENDOR _____
使用機種 : _____
MODEL _____

聯 絡 人 : 陳 仕 軒

聯絡電話 : (02) 2880-1838 / (755) 23115592

附 件 :

ACCESSORIES ☒ 規格書

SPECIFICATION

☒ 圖樣

DRAWING

☒ 樣品

SAMPLE


☐ 檢驗報告

TEST REPORT

認可狀況 :

(APPROVED STATUS)

2010.6.16

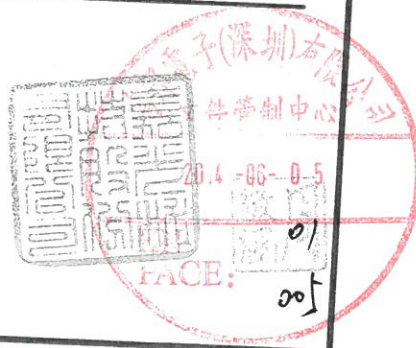

R&D / PE / QC / PURCHASE / VENDOR

APP.NO. : _____

6/30

AT5020 Series

Multilayer Chip Antenna

Features

- ❖ Monolithic SMD with small, low-profile and light-weight type.
- ❖ Wide bandwidth

Applications

- ❖ Bluetooth/Wireless LAN/Home RF
- ❖ ISM band 2.4GHz applications

Specifications

Part Number	Operating Frequency (MHz)	Peak Gain (XZ-V)	Average Gain (XZ-V)	VSWR	Impedance
AT5020 -B2R8HAA_	2400 ~ 2500	0 dBi typ.	-1 dBi typ.	2 max.	50 Ω


Q'ty/Reel (pcs) : 2,000pcs
 Operating Temperature Range : -40 ~ +85 °C
 Storage Temperature Range : +5 ~ +35 °C, Humidity 45~75%RH
 Storage Period : 12 months max.
 Power Capacity : 2W max.

Part Number

AT 5020 - B 2R8 HAA □ □
 ① ② ③ ④ ⑤ ⑥ ⑦

① Type	AT : Antenna	② Dimensions (L × W)	5.0× 2.0 mm
③ Material Code	B	④ Initial center frequency	2R8=2800MHz
⑤ Specification Code	HAA	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	=lead-containing /LF=lead-free		

Terminal Configuration




No.	Terminal Name	No.	Terminal Name
①	Feeding Point	②	NC

Dimensions and Recommended PC Board Pattern


Unit : mm

7/32

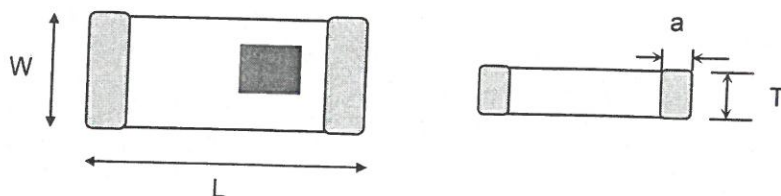


Mark	L	W	T	a
Dimensions	5.0±0.2	2.0±0.2	1.1±0.2	0.5±0.3

(a) Without Matching Circuits

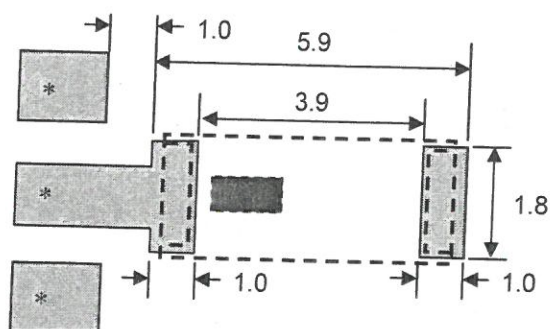

(b) With Matching Circuits

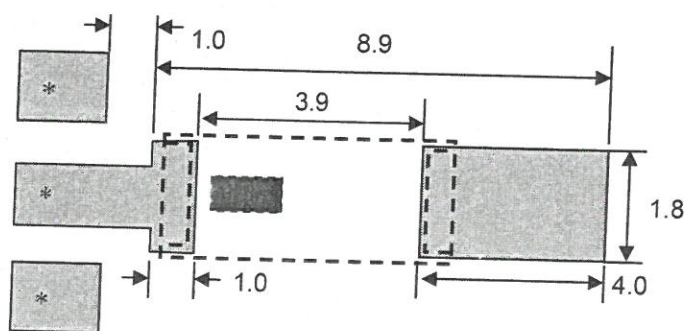


*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.



8/30


Typical Electrical Characteristics (T=25°C)

❖ Test Board



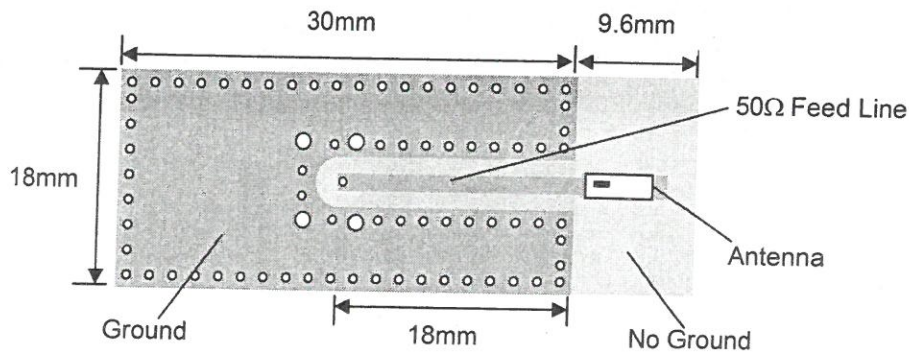


❖ Return Loss

(a) Without Matching Circuits

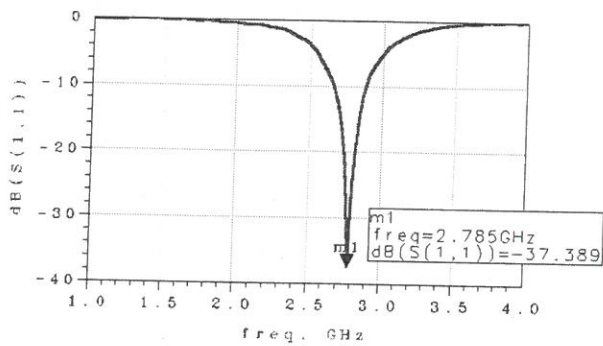

(b) With Matching Circuits

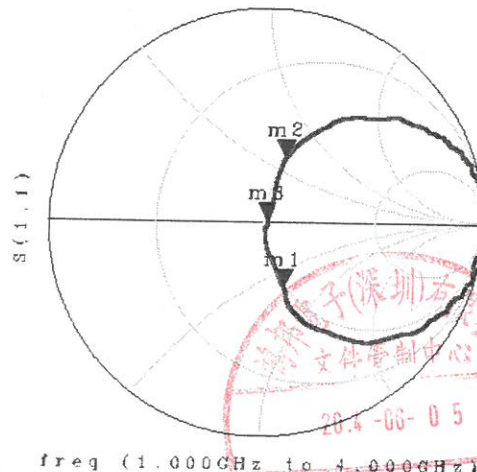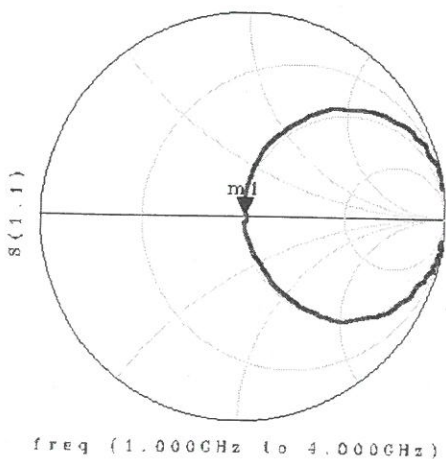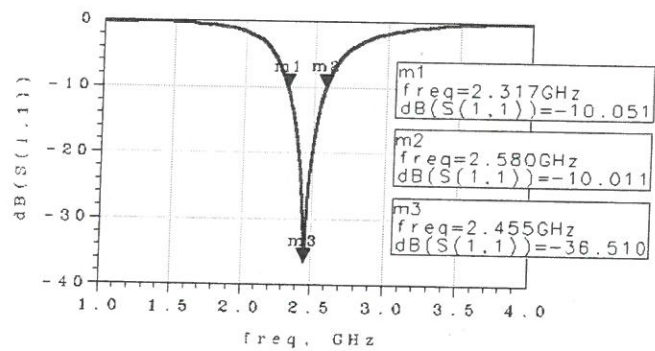



❖ R

freq (1.000GHz to 4.000GHz)


XY cut @2.45GHz
— Vertical
-- Horizontal

9/30


XY-V/XY-H

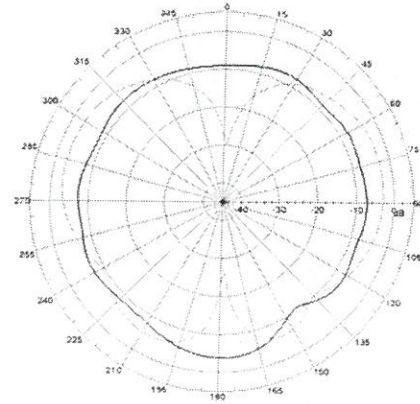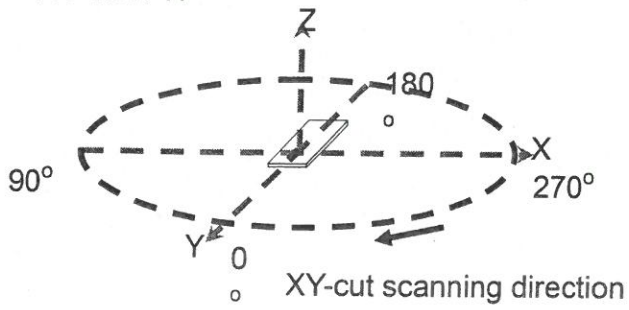


XZ-V/XZ-H

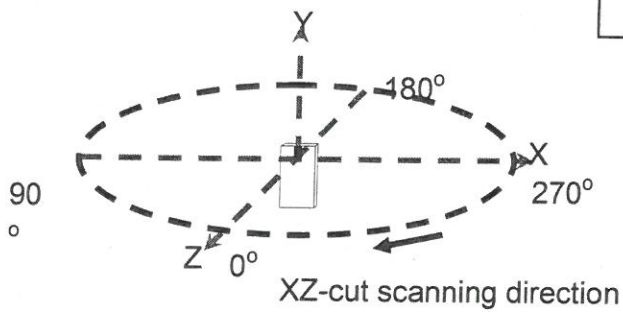


XZ cut @2.45GHz
— Vertical
- - Horizontal

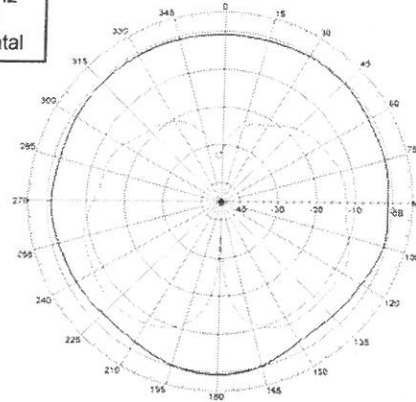

YZ-V/YZ-H

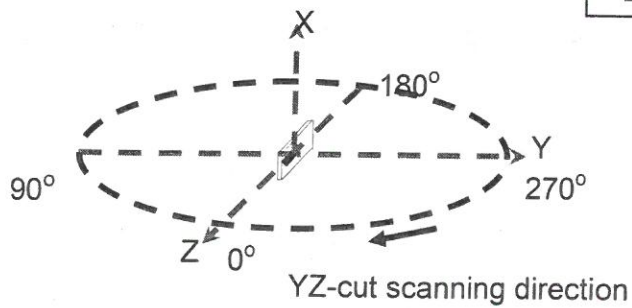


XY cut @2.45GHz
— Vertical
- - Horizontal

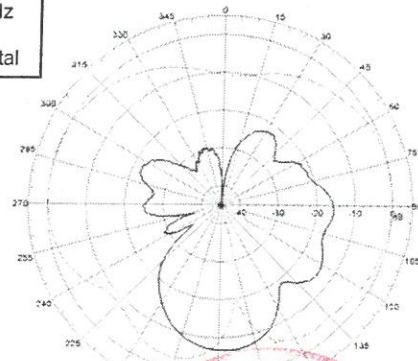



Taping Specifications

❖Tape & Reel Dimensions (Unit: mm) vs. Quantity (pcs)

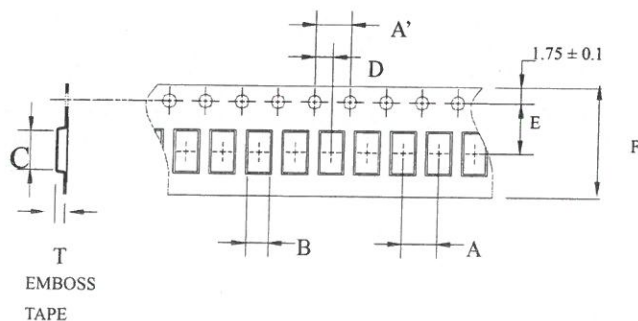

Type	A	A'	B	C	D	E	F	T	Quantity/per reel	Tape material
AT5020	4.0±0.1	4.0±0.1	2.4±0.1	5.4±0.1	2.0±0.05	5.5±0.1	12.0±0.1	1.20±0.1	2,000pcs	Plastic (Embossed)


❖Reel Dimensions (Unit: mm)

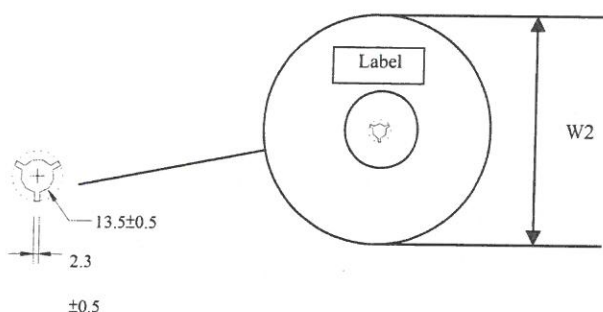


Label: Customer's Name,
ACX P/N, Q'ty, Date,
ACX Corp.

Type	W2	W3	W4	W5
AT5020	178±1	60±1	1.4±0.2	17±0.5

❖Leader and Trailer Tape

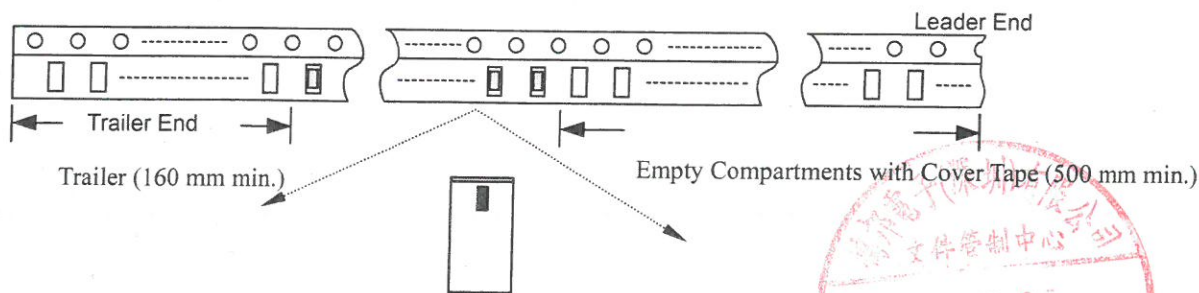

❖ **Peel-off Force**

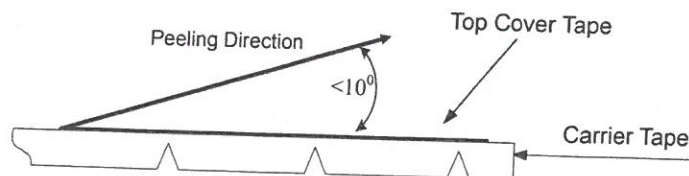

Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300 ± 10 mm/min.

❖ **Storage Conditions**


- (1) Temperature: 15 ~35°C, relative humidity (RH): 45~75%.
- (2) Non-corrosive environment

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.



Mechanical & Environmental Characteristics

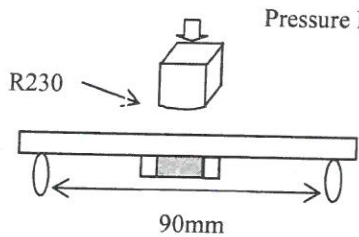
Item	Requirements	Procedure
Solderability	1. No apparent damage 2. More than 95% of the terminal electrode shall be covered with new solder	1. Preheat: $120 \pm 5^{\circ}\text{C}$ 2. Solder: $245 \pm 5^{\circ}\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	1. 1kg minimum	1. Solder specimen onto test jig. 2. Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction
Deflection (Substrate Bending)	1. No apparent damage	1. Solder specimen onto test jig (FR4, 0.8mm) using the recommend soldering profile. 2. Apply a bending force of 1mm deflection 
Heat/Humidity Resistance	1. No apparent damage 2. Fulfill the electrical specification after test	1. Temperature: $85 \pm 2^{\circ}\text{C}$ 2. Humidity: 90% ~ 95% RH 3. Duration: 1000 ± 48hrs 4. Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	1. No apparent damage 2. Fulfill the electrical specification after test	1. One cycle/step 1 : $125 \pm 5^{\circ}\text{C}$ for 30 min step 2 : $-40 \pm 5^{\circ}\text{C}$ for 30 min 2. No of cycles : 100 3. Recovery: 1-2 hrs
Low Temperature Resistance	1. No apparent damage 2. Fulfill the electrical specification after test	1. Temperature: $-40 \pm 5^{\circ}\text{C}$ 2. Duration: 500 ± 24hrs 3. Recovery: 1-2hrs



Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

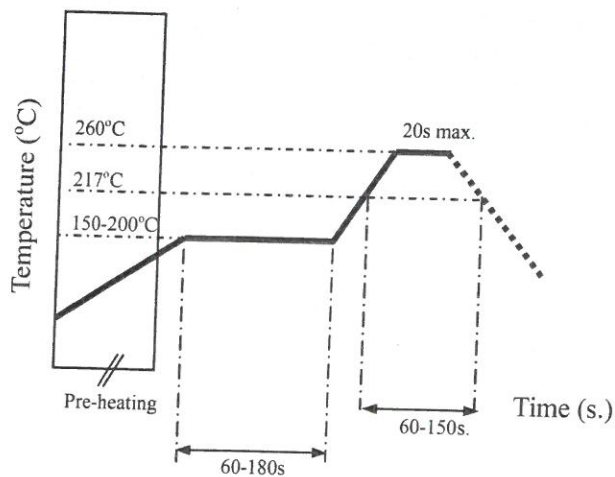

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>





14/30

Test Report

No. : CE/2013/55890

Date : 2013/06/07

Page: 1 of 7

ADVANCED CERAMIC X (ACX) CORPORATION

16, TZU CHIANG ROAD, HSINCHU INDUSTRIAL DISTRICT, HSINCHU HSIEN, TAIWAN 303



The following sample(s) was/were submitted and identified by/on behalf of the applicant as :

Sample Submitted By : ADVANCED CERAMIC X (ACX) CORPORATION
Sample Description : MULTILAYER LTCC-B COMPONENTS (CERAMIC BODY)
Style/Item No. : AD SERIES, AT SERIES, BD SERIES, BF SERIES, BL SERIES, BM SERIES, BW SERIES, CD SERIES, CF SERIES, CP SERIES, DM SERIES, DP SERIES, DS SERIES, EF SERIES, ES SERIES, FA SERIES, FB SERIES, FD SERIES, FM SERIES, GS SERIES, HI SERIES, HF SERIES, HM SERIES, HS SERIES, LF SERIES, OM SERIES, OS SERIES, PD SERIES, NF SERIES, QS SERIES, SF SERIES, TS SERIES, TP SERIES, LTCC SUBSTRATES
Sample Receiving Date : 2013/05/31
Testing Period : 2013/05/31 TO 2013/06/07

Test Requested : (1) As specified by client, with reference to RoHS Directive 2011/65/EU Annex II to determine Cadmium, Lead, Mercury, Cr(VI), PBBs, PBDEs contents in the submitted sample.
(2) As specified by client, to test Halogen-Fluorine, Chlorine, Bromine, Iodine contents in the submitted sample.

Test Method : Please refer to next page(s).

Test Result(s) : Please refer to next page(s).



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Portals/0/Terms-and-Conditions-for-Electronic-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



15/40

Test Report

No. : CE/2013/55890

Date : 2013/06/07

Page: 2 of 7

ADVANCED CERAMIC X (ACX) CORPORATION

16, TZU CHIANG ROAD, HSINCHU INDUSTRIAL DISTRICT, HSINCHU HSIEN, TAIWAN 303



Test Result(s)

PART NAME No.1 : MULTILAYER LTCC-B COMPONENTS (CERAMIC BODY)

Test Item(s)	Unit	Method	MDL	Result No.1
Cadmium (Cd)	mg/kg	With reference to IEC 62321: 2008 and performed by ICP-AES.	2	n.d.
Lead (Pb)	mg/kg	With reference to IEC 62321: 2008 and performed by ICP-AES.	2	57400
Mercury (Hg)	mg/kg	With reference to IEC 62321: 2008 and performed by ICP-AES.	2	n.d.
Hexavalent Chromium Cr(VI)	mg/kg	With reference to IEC 62321: 2008 and performed by UV-VIS.	2	n.d.
Sum of PBBs			-	n.d.
Monobromobiphenyl			5	n.d.
Dibromobiphenyl			5	n.d.
Tribromobiphenyl			5	n.d.
Tetrabromobiphenyl			5	n.d.
Pentabromobiphenyl			5	n.d.
Hexabromobiphenyl			5	n.d.
Heptabromobiphenyl			5	n.d.
Octabromobiphenyl			5	n.d.
Nonabromobiphenyl			5	n.d.
Decabromobiphenyl			5	n.d.
Sum of PBDEs			-	n.d.
Monobromodiphenyl ether			5	n.d.
Dibromodiphenyl ether			5	n.d.
Tribromodiphenyl ether			5	n.d.
Tetrabromodiphenyl ether			5	n.d.
Pentabromodiphenyl ether			5	n.d.
Hexabromodiphenyl ether			5	n.d.
Heptabromodiphenyl ether			5	n.d.
Octabromodiphenyl ether			5	n.d.
Nonabromodiphenyl ether			5	n.d.
Decabromodiphenyl ether			5	n.d.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Taiwan/Products/Services/Testing/Environmental/Environmental%20Testing/Environmental%20Testing.htm> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Taiwan/Products/Services/Testing/Environmental/Environmental%20Testing/Environmental%20Testing.htm>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.



16/30

Test Report

No. : CE/2013/55890

Date : 2013/06/07

Page: 3 of 7

ADVANCED CERAMIC X (ACX) CORPORATION

16, TZU CHIANG ROAD, HSINCHU INDUSTRIAL DISTRICT, HSINCHU HSIEN, TAIWAN 303



Test Item(s)	Unit	Method	MDL	Result
				No.1
Halogen				
Halogen-Fluorine (F) (CAS No.: 14762-94-8)	mg/kg	With reference to BS EN 14582:2007. Analysis was performed by IC.	50	n.d.
Halogen-Chlorine (Cl) (CAS No.: 22537-15-1)			50	n.d.
Halogen-Bromine (Br) (CAS No.: 10097-32-2)			50	n.d.
Halogen-Iodine (I) (CAS No.: 14362-44-8)			50	n.d.

Note :

1. mg/kg = ppm ; 0.1wt% = 1000ppm
2. n.d. = Not Detected
3. MDL = Method Detection Limit
4. " - " = Not Regulated



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Test Report

No. : CE/2013/55890

Date : 2013/06/07


Page: 4 of 7

ADVANCED CERAMIC X (ACX) CORPORATION

16, TZU CHIANG ROAD, HSINCHU INDUSTRIAL DISTRICT, HSINCHU HSIEN, TAIWAN 303



- 1) These samples were dissolved totally by pre-conditioning method according to below flow chart.
(Cr⁶⁺ test method excluded)
- 2) Name of the person who made measurement: Climbgreat Yang
- 3) Name of the person in charge of measurement: Troy Chang

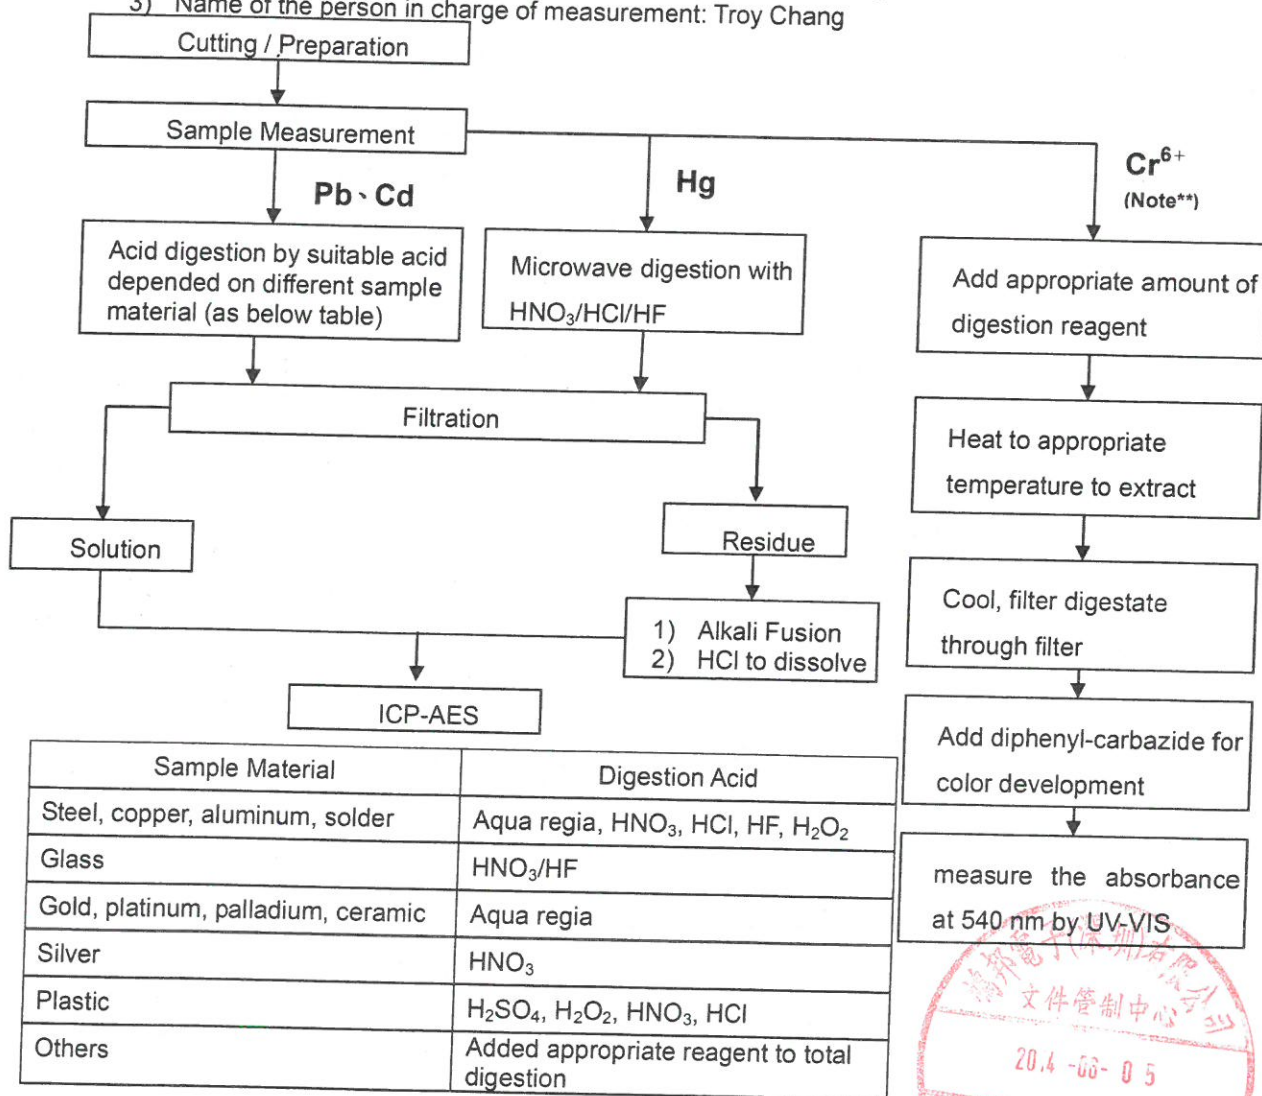

Note :** (1) For non-metallic material, add alkaline digestion reagent and heat to 90~95°C
(2) For metallic material, add pure water and heat to boiling.



Test Report

No. : CE/2013/55890

Date : 2013/06/07

Page: 5 of 7


ADVANCED CERAMIC X (ACX) CORPORATION

16, TZU CHIANG ROAD, HSINCHU INDUSTRIAL DISTRICT, HSINCHU HSIEN, TAIWAN 303



PBB/PBDE analytical FLOW CHART

- Name of the person who made measurement: Roman Wong
- Name of the person in charge of measurement: Troy Chang

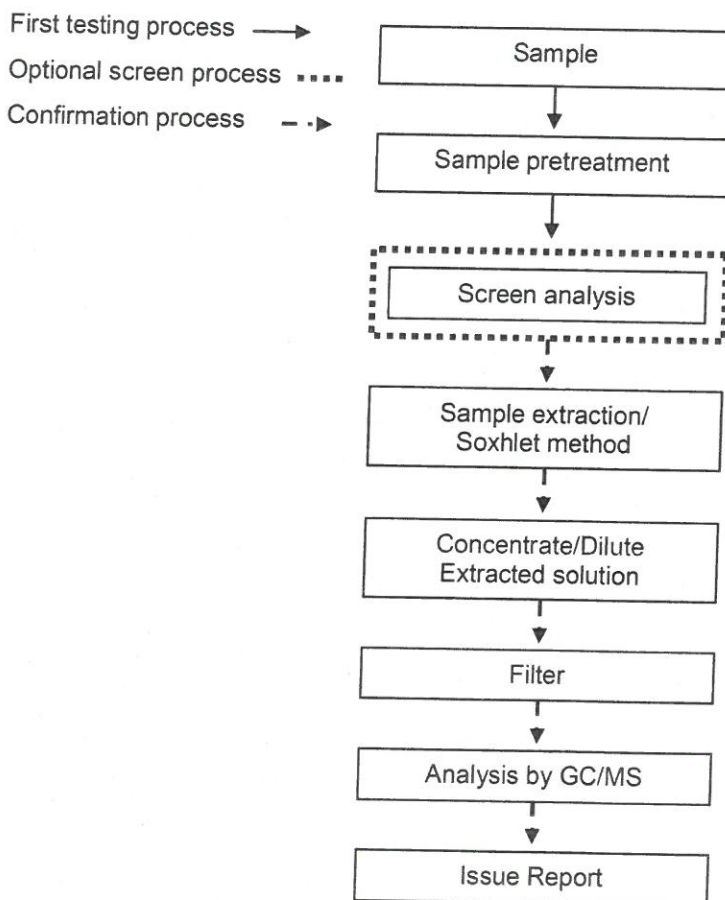

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions-for-Electronic-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Test Report

No. : CE/2013/55890

Date : 2013/06/07

Page: 6 of 7


ADVANCED CERAMIC X (ACX) CORPORATION

16, TZU CHIANG ROAD, HSINCHU INDUSTRIAL DISTRICT, HSINCHU HSIEN, TAIWAN 303



Analytical flow chart of halogen content

- Name of the person who made measurement: Rita Chen
- Name of the person in charge of measurement: Troy Chang

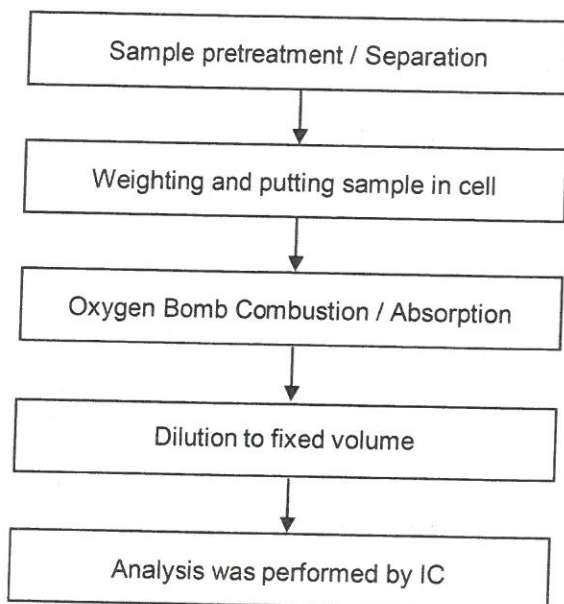

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/en/Terms-and-Conditions-for-Electronic-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.