

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBCIC-WTW-P24100653A

FCC ID: U8G-P1AX02

Product: Peplink Pepwave Wireless Product

Brand:  **PEPWAVE**

Model No.: MAX BR1 Pro 5G

Series Model: MAX-BR1-PRO-5GK-T-PRM (refer to item 3.1 for more details)

Received Date: 2025/3/17

Test Date: 2025/3/20 ~ 2025/6/3

Issued Date: 2025/6/9

Applicant: PISMO LABS TECHNOLOGY LIMITED

Address: A8, 5/F, HK Spinners Industrial Building, Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Hong Kong

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration /

Designation Number: 788550 / TW0003

Approved by:  , **Date:** 2025/6/9

Jeremy Lin / Senior Engineer

This test report consists of 38 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Pettie Chen / Senior Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description.....	6
3.2 Antenna Description of EUT.....	7
3.3 Channel List.....	8
3.4 Test Mode Applicability and Tested Channel Detail.....	9
3.5 Duty Cycle of Test Signal.....	10
3.6 Test Program Used and Operation Descriptions	11
3.7 Connection Diagram of EUT and Peripheral Devices	11
3.8 Configuration of Peripheral Devices and Cable Connections	12
4 Test Instruments	13
4.1 RF Output Power.....	13
4.2 AC Power Conducted Emissions	13
4.3 Unwanted Emissions below 1 GHz	14
4.4 Unwanted Emissions above 1 GHz.....	15
5 Limits of Test Items.....	16
5.1 RF Output Power.....	16
5.2 AC Power Conducted Emissions	16
5.3 Unwanted Emissions below 1 GHz	16
5.4 Unwanted Emissions above 1 GHz.....	17
6 Test Arrangements.....	18
6.1 RF Output Power.....	18
6.1.1 Test Setup	18
6.1.2 Test Procedure.....	18
6.2 AC Power Conducted Emissions	18
6.2.1 Test Setup	18
6.2.2 Test Procedure.....	18
6.3 Unwanted Emissions below 1 GHz	19
6.3.1 Test Setup	19
6.3.2 Test Procedure.....	20
6.4 Unwanted Emissions above 1 GHz.....	21
6.4.1 Test Setup	21
6.4.2 Test Procedure.....	21
7 Test Results of Test Item	22
7.1 RF Output Power.....	22
7.2 AC Power Conducted Emissions	25
7.3 Unwanted Emissions below 1 GHz	29
7.4 Unwanted Emissions above 1 GHz.....	33
8 Pictures of Test Arrangements	37
9 Information of the Testing Laboratories	38

Release Control Record

Issue No.	Description	Date Issued
RFBCIC-WTW-P24100653A	Original release.	2025/6/9

1 Certificate

Product: Peplink Pepwave Wireless Product

Brand:  **PEPWAVE**

Model No.: MAX BR1 Pro 5G

Series Model: MAX-BR1-PRO-5GK-T-PRM (refer to item 3.1 for more details)

Sample Status: Prototype

Applicant: PISMO LABS TECHNOLOGY LIMITED

Test Date: 2025/3/20 ~ 2025/6/3

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement procedure: ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	N/A	Refer to Note 1
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note 1
15.247(d)	Conducted Out of Band Emissions	N/A	Refer to Note 1
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -7.02 dB at 0.32976 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.7 dB at 33.88 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -6.5 dB at 2390.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is SMA a standard connector.

Note:

1. Only test item of RF Output Power, AC Power Conducted Emissions and Unwanted Emissions tests were performed for this report. Other testing data please refer to Sporton report No.: FR131219A certified report.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.371 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.44 dB
	30 MHz ~ 1 GHz	2.95 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Peplink Pepwave Wireless Product
Brand	
Model No.	MAX BR1 Pro 5G
Series Model	MAX-BR1-PRO-5GK-T-PRM
Status of EUT	Prototype
Power Supply Rating	10-30Vdc from Molex Power Port; 12Vdc from Adapter PoE 802.3at
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 802.11ac mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 400 Mbps 802.11ax: up to 573.5 Mbps
Operating Frequency	2.412 GHz ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 11 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 9
Output Power	263.809 mW (24.21 dBm)

Note:

1. This report is issued as a supplementary report. The differences compared with the original report are adding CPU DDR4 DRAM, PoE input feature and eMMC components. Therefore, only the RF Output Power, AC Power Conducted Emissions and Unwanted Emissions tests had been an addendum test to this report.
2. All models are listed as below.

Brand	Model	Difference
	MAX BR1 Pro 5G	For marketing purpose
	MAX-BR1-PRO-5GK-T-PRM	

3. The EUT uses following accessories.

Item	Brand	Model	AC Input	DC Output	DC Output Cable
Adapter	LEI	MU24D1120200-A1	100-240Vac 50/60Hz 0.7A	12Vdc 2.0A	Non-Shielded, 1.5m

*The AC adapter model "MU24D1120200-A1" was used as a representative adapter for testing.

4. Simultaneously transmission combination.

Combination	Technology		
1	WLAN 2.4 GHz	WLAN 5 GHz	WWAN

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type
WiFi_2-1 / WiFi_2-2 (Newly)	0/1	WIESON	ARY121-1976-001-00	2.25	2.4 ~ 2.4835 GHz	Omni-directional	RP-SMA
				2.55	5.15 ~ 5.25 GHz		
				3.36	5.725 ~ 5.85 GHz		
WiFi_1-1 / WiFi_1-2 (original)	0/1	Master Wave	98614PRSX000	2.44	2.4 ~ 2.4835 GHz	Omni-directional	RP-SMA
				4.1	5.15 ~ 5.25 GHz		
				4.73	5.725 ~ 5.85 GHz		

* The newly antenna was added in 2025/1/16 Class II Permissive Change

* Antenna WiFi_1-1 / WiFi_1-2 with the maximum gain was for the final tests.

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX

3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT has the following operations/ usages: 10Vdc from Molex Power Port / 30Vdc from Molex Power Port / 12Vdc from Adapter / PoE 802.3at via PoE injector. Pre-scan these operations/ usages and find the worst case as a representative test condition. 2. EUT can be used in the following ways: Lying / Wall Mount. Pre-scan these ways and find the worst case as a representative test condition. 3. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Worst Case:	1. Worst Condition: 12Vdc from Adapter / PoE 802.3at via PoE injector 2. Worst Condition: Lying

Following channel(s) was (were) selected for the final test as listed below:


Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	A	802.11b	CDD	1, 6, 11	DBPSK	1Mb/s
		802.11g	CDD	1, 6, 11	BPSK	6Mb/s
		802.11n (HT20)	CDD	1, 6, 11	BPSK	MCS0
		802.11n (HT40)	CDD	3, 6, 9	BPSK	MCS0
		802.11ac (VHT20)	CDD	1, 6, 11	BPSK	MCS0
		802.11ac (VHT40)	CDD	3, 6, 9	BPSK	MCS0
		802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
		802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
AC Power Conducted Emissions	A, B	802.11b	CDD	6	DBPSK	1Mb/s
Unwanted Emissions below 1 GHz	A, B	802.11b	CDD	6	DBPSK	1Mb/s
Unwanted Emissions above 1 GHz	A	802.11b	CDD	6	DBPSK	1Mb/s
		802.11g	CDD	6	BPSK	6Mb/s
		802.11ax (HE40)	CDD	3	BPSK	MCS0
EUT Configure Mode:	A	12Vdc from Adapter				
	B	PoE 802.3at via PoE injector				

3.5 Duty Cycle of Test Signal


802.11b: Duty cycle = $0.656 \text{ ms} / 1.232 \text{ ms} \times 100\% = 53.2\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.74 \text{ dB}$

802.11g: Duty cycle = $1.44 \text{ ms} / 1.55 \text{ ms} \times 100\% = 92.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.32 \text{ dB}$


802.11ax (HE40): Duty cycle = $5.46 \text{ ms} / 5.7 \text{ ms} \times 100\% = 95.8\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.19 \text{ dB}$

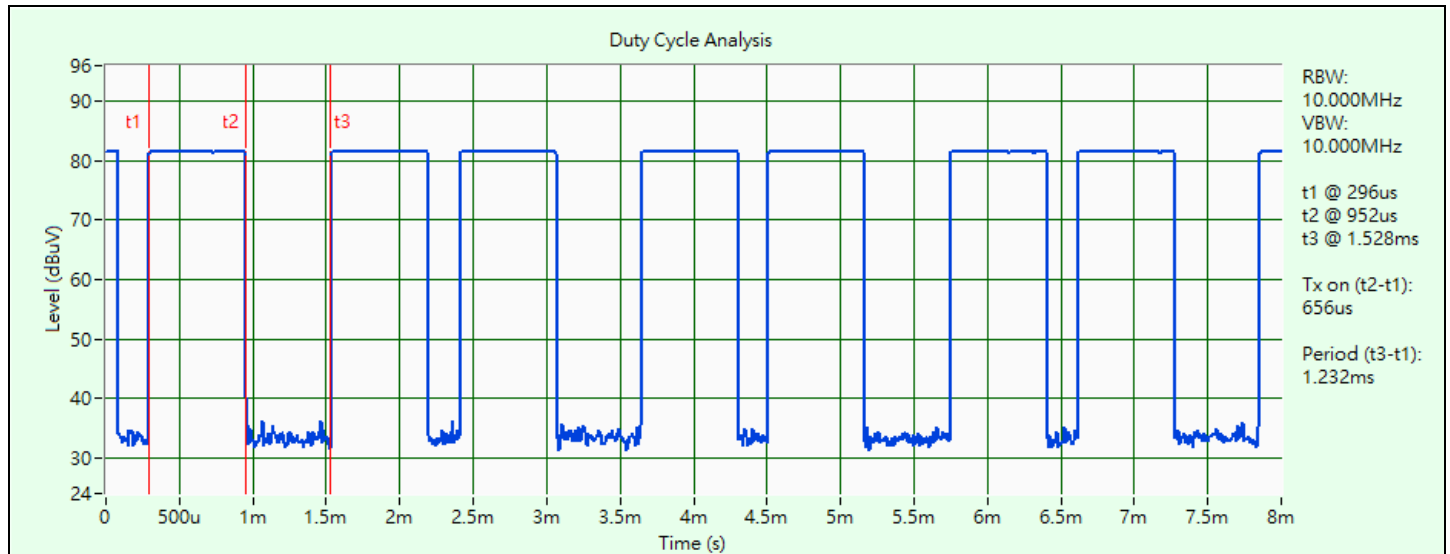

802.11b

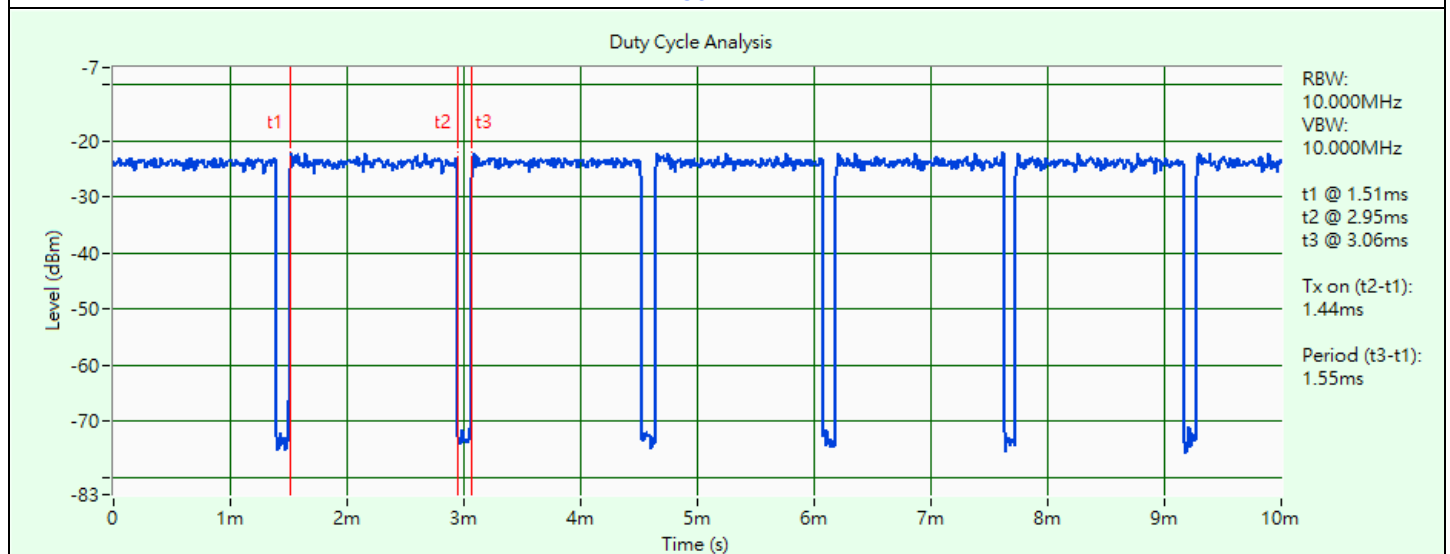

802.11g

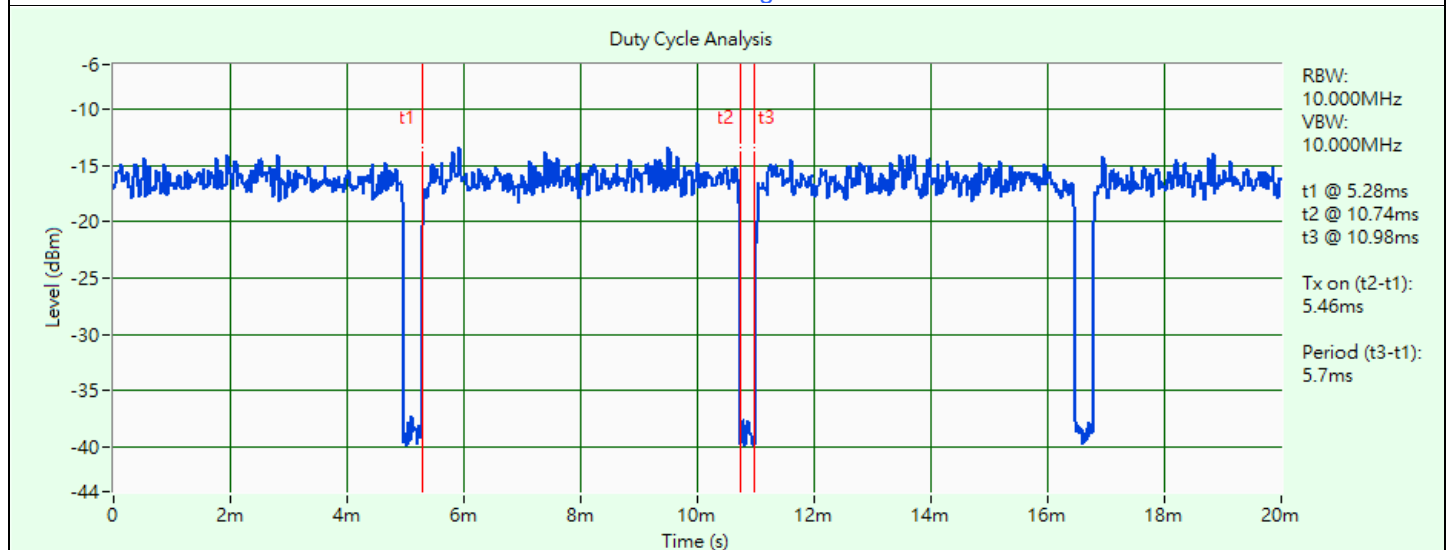


802.11ax (HE40)

3.6 Test Program Used and Operation Descriptions


Controlling software QSPR has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

Test Mode A

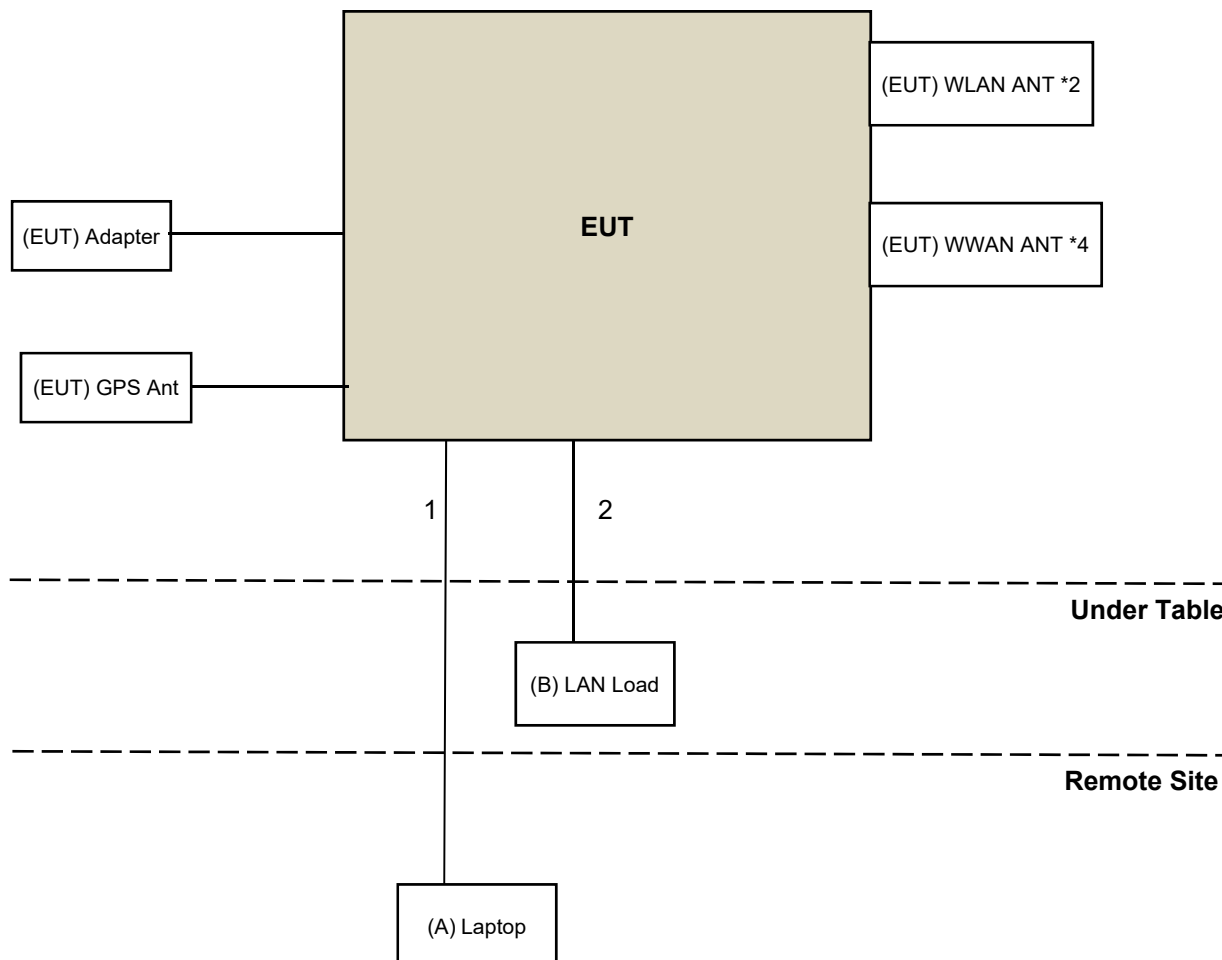

Test Mode B

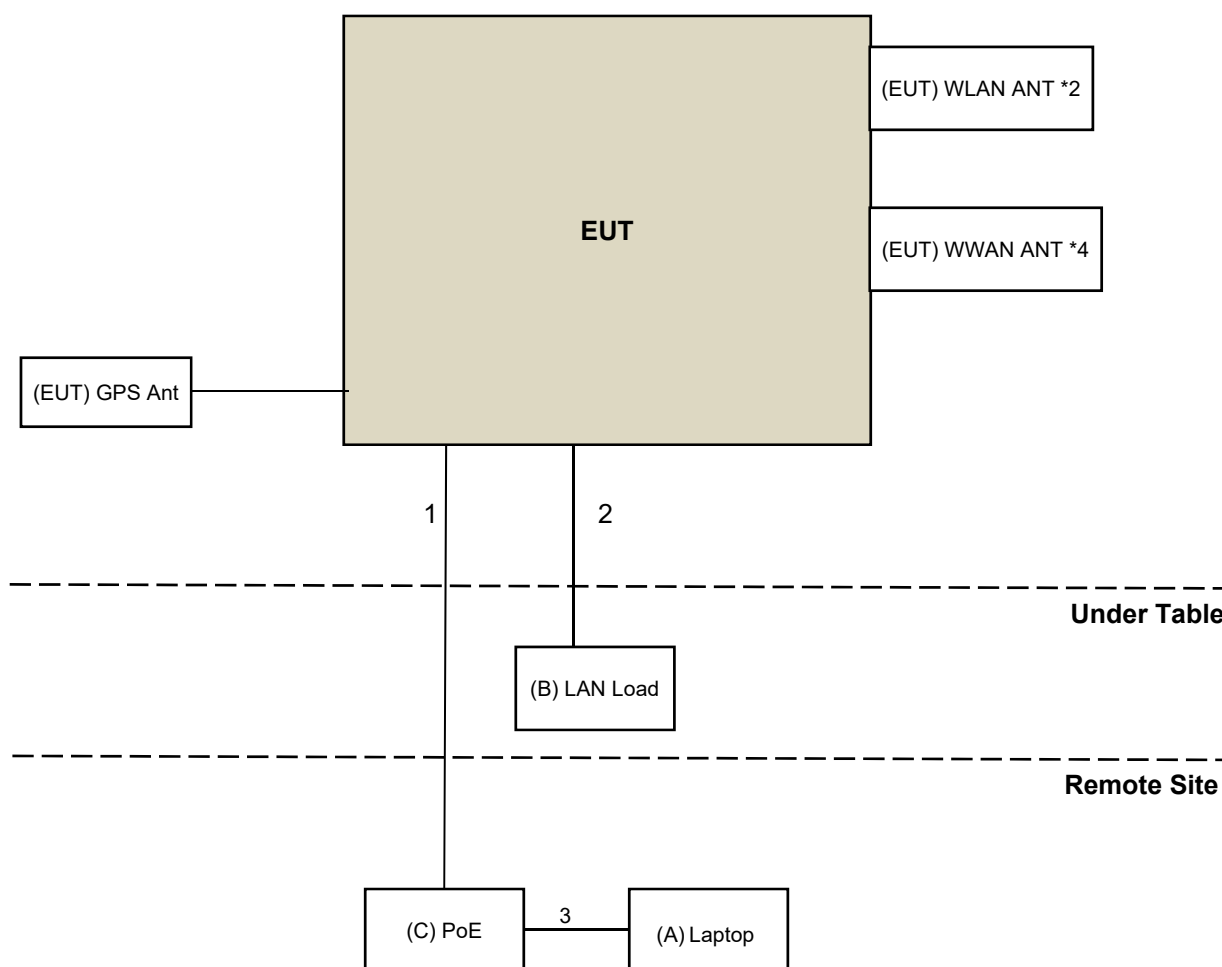

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	DELL	Inspiron 14R	8LRKKW1	N/A	Provided by Lab
B	LAN Load	N/A	N/A	N/A	N/A	Provided by Lab
C	PoE	N/A	N/A	N/A	N/A	Supplied by applicant

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	10	No	0	Provided by Lab
2	RJ-45 Cable	2	1.5	No	0	Provided by Lab
3	RJ-45 Cable	1	1.5	No	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Peak Power Analyzer Keysight	8990B	MY51000485	2025/1/20	2026/1/19
Wideband Power Sensor Keysight	N1923A	MY58020002	2025/1/21	2026/1/20
		MY58140009	2025/1/21	2026/1/20

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/5/23

4.2 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2024/11/28	2025/11/27
	E1-011280	05	2024/11/28	2025/11/27
	E1-011311	09	2024/11/28	2025/11/27
DC-LISN Schwarzbeck	NNBM 8126G	8126G-069	2024/11/5	2025/11/4
EMI Test Receiver R&S	ESR3	102783	2024/12/17	2025/12/16
Fixed Attenuator STI	BNC5W10dB	PAD-COND2-01	2024/8/25	2025/8/24
LISN R&S	ESH2-Z5	100100	2025/3/5	2026/3/4
	ESH3-Z5	100312	2024/9/9	2025/9/8
RF Coaxial Cable Woken	5D-FB	Cable-cond2-01	2024/8/25	2025/8/24
Software BVADT	BVADT_Conf_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2024/8/28	2025/8/27

Notes:

1. The test was performed in HY - Conduction 2.
2. Tested Date: 2025/5/16 ~ 2025/6/3

4.3 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-472	2024/10/14	2025/10/13
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXE EMI Receiver Agilent	N9038A	MY51210203	2024/8/27	2025/8/26
Preamplifier EMCI	EMC 330H	980112	2024/9/24	2025/9/23
	EMC001340	980201	2024/9/24	2025/9/23
RF Coaxial Cable Woken	8D-FB	Cable-Ch10-01	2024/9/24	2025/9/23
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2025/5/16 ~ 2025/6/3

4.4 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	7	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	2024/11/10	2025/11/9
	BBHA 9170	148	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY51210203	2024/8/27	2025/8/26
Preamplifier EMCI	EMC 012645	980115	2024/9/24	2025/9/23
	EMC 184045	980116	2024/9/24	2025/9/23
RF Coaxial Cable EMCI	EMC102-KM-KM-600	150928	2024/7/6	2025/7/5
	EMC102-KM-KM-3000	150929	2024/7/6	2025/7/5
	EMC104-SM-SM- 8000+3000	171005	2024/9/24	2025/9/23
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	2024/9/24	2025/9/23
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2025/3/20 ~ 2025/3/21

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5.2 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.3 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).

5.4 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup

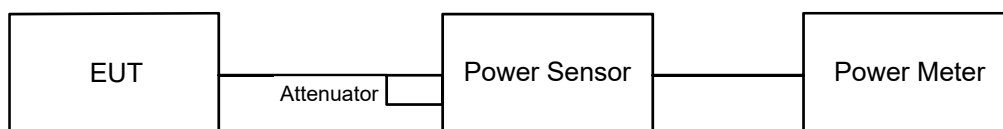


6.1.2 Test Procedure

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 AC Power Conducted Emissions

6.2.1 Test Setup

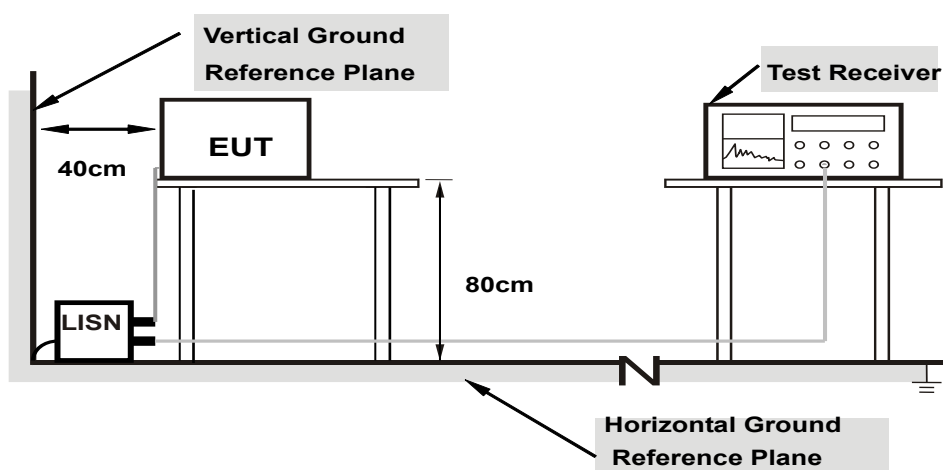

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.3 Unwanted Emissions below 1 GHz

6.3.1 Test Setup

For Radiated emission below 30 MHz

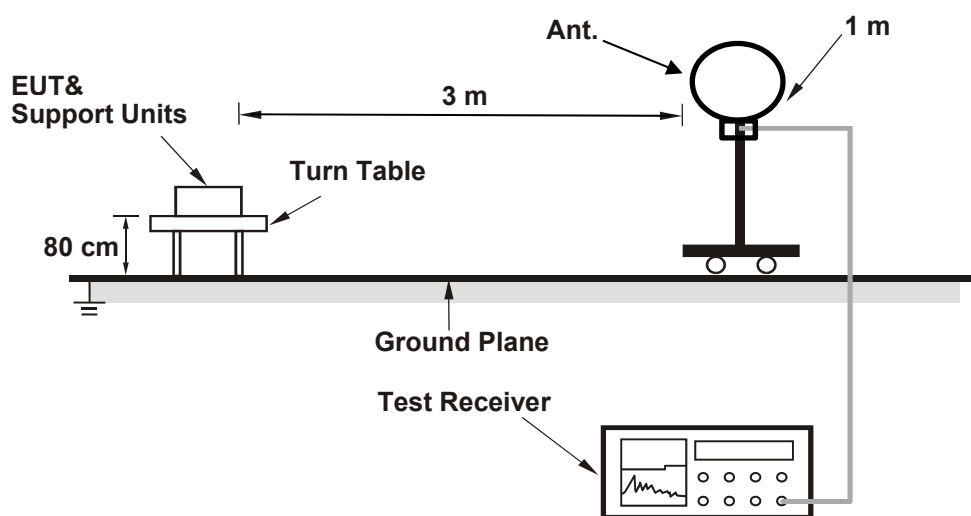

For Radiated emission above 30 MHz

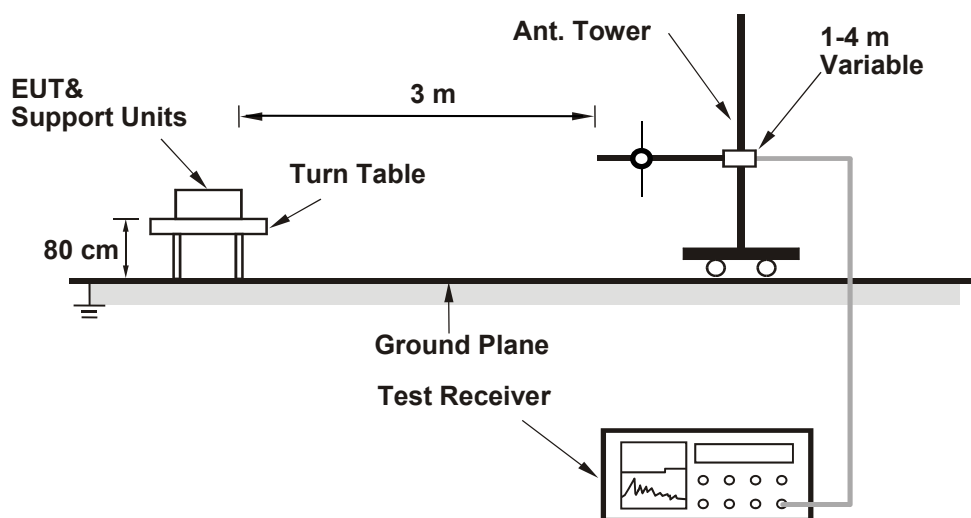

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.4 Unwanted Emissions above 1 GHz

6.4.1 Test Setup

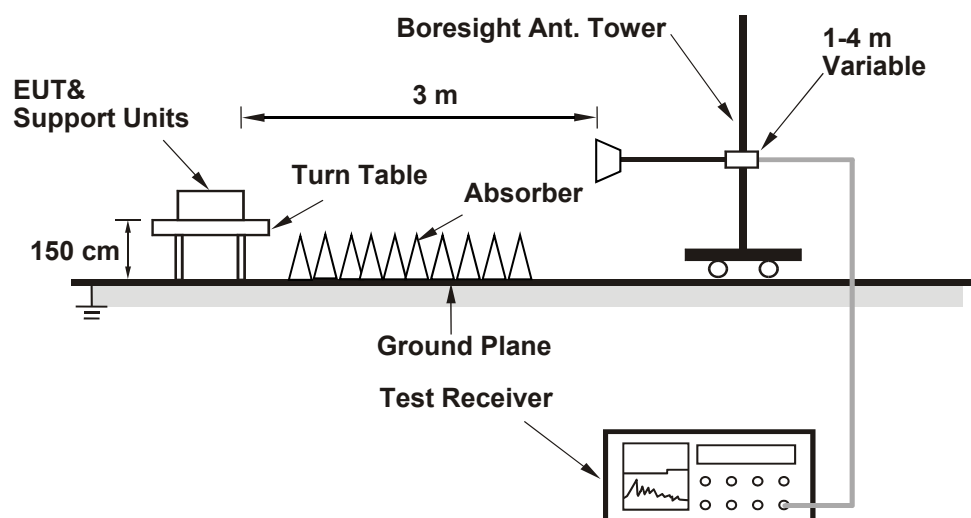

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.4.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 60% RH	Tested By:	Chris Lin
--------------	----------------	---------------------------	--------------	------------	-----------

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	19.67	19.30	177.797	22.50	30	Pass
6	2437	21.29	21.10	263.411	24.21	30	Pass
11	2462	19.39	19.14	168.931	22.28	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	20.22	19.86	202.024	23.05	30	Pass
6	2437	21.35	21.05	263.809	24.21	30	Pass
11	2462	15.66	15.32	70.854	18.50	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	15.48	15.28	69.047	18.39	30	Pass
6	2437	20.71	20.34	225.904	23.54	30	Pass
11	2462	14.90	14.55	59.413	17.74	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11n (HT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.64	16.18	87.627	19.43	30	Pass
6	2437	13.77	13.39	45.65	16.59	30	Pass
9	2452	15.29	15.08	66.017	18.20	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	18.00	17.57	120.244	20.80	30	Pass
6	2437	19.72	19.36	180.054	22.55	30	Pass
11	2462	14.92	14.56	59.622	17.75	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.60	16.50	90.377	19.56	30	Pass
6	2437	13.72	13.65	46.724	16.70	30	Pass
9	2452	15.39	15.19	67.631	18.30	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	18.08	17.66	122.613	20.89	30	Pass
6	2437	19.83	19.38	182.857	22.62	30	Pass
11	2462	14.98	14.69	60.922	17.85	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.70	16.60	92.482	19.66	30	Pass
6	2437	13.80	13.75	47.702	16.79	30	Pass
9	2452	15.45	15.32	69.116	18.40	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 2.44 dBi < 6 dBi, so the output power limit shall not be reduced.

7.2 AC Power Conducted Emissions


Test Mode A

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 74 % RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	10.29	37.10	22.82	47.39	33.11	65.57	55.57	-18.18	-22.46
2	0.24600	10.34	34.96	26.58	45.30	36.92	61.89	51.89	-16.59	-14.97
3	0.32976	10.35	36.94	32.09	47.29	42.44	59.46	49.46	-12.17	-7.02
4	1.18600	10.44	21.79	10.47	32.23	20.91	56.00	46.00	-23.77	-25.09
5	6.70600	10.60	15.86	8.97	26.46	19.57	60.00	50.00	-33.54	-30.43
6	11.09000	10.64	13.84	7.40	24.48	18.04	60.00	50.00	-35.52	-31.96

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

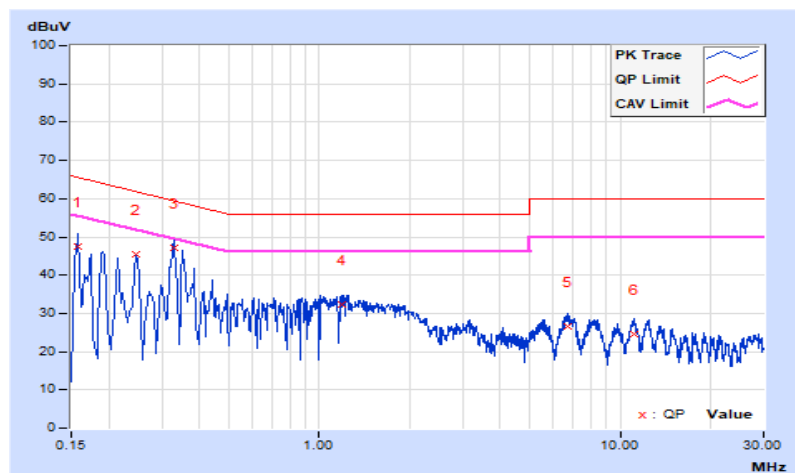


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 74 % RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16600	10.34	40.93	28.72	51.27	39.06	65.16	55.16	-13.89	-16.10
2	0.21400	10.36	33.27	18.47	43.63	28.83	63.05	53.05	-19.42	-24.22
3	0.35000	10.38	34.37	28.76	44.75	39.14	58.96	48.96	-14.21	-9.82
4	1.75000	10.50	24.65	16.91	35.15	27.41	56.00	46.00	-20.85	-18.59
5	3.31400	10.59	22.37	14.27	32.96	24.86	56.00	46.00	-23.04	-21.14
6	5.78600	10.67	18.20	9.93	28.87	20.60	60.00	50.00	-31.13	-29.40

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

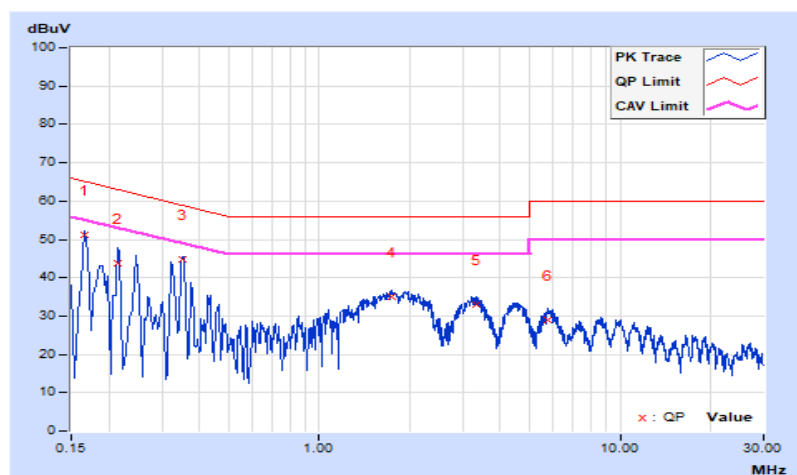


Test Mode B

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Thomas Cheng		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.25	35.11	22.11	45.36	32.36	66.00	56.00	-20.64	-23.64
2	0.17615	10.26	32.49	19.58	42.75	29.84	64.67	54.67	-21.92	-24.83
3	3.83800	10.42	27.64	24.95	38.06	35.37	56.00	46.00	-17.94	-10.63
4	5.93000	10.43	30.65	29.56	41.08	39.99	60.00	50.00	-18.92	-10.01
5	13.25400	10.49	28.54	23.81	39.03	34.30	60.00	50.00	-20.97	-15.70
6	22.36600	10.59	39.85	27.71	50.44	38.30	60.00	50.00	-9.56	-11.70

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

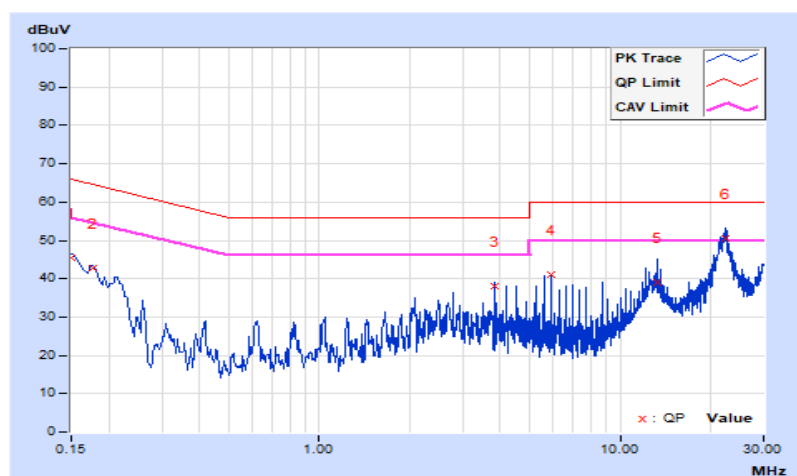


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 69 % RH
Tested By	Thomas Cheng		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.30	32.16	19.67	42.46	29.97	65.78	55.78	-23.32	-25.81
2	0.19800	10.30	27.45	20.62	37.75	30.92	63.69	53.69	-25.94	-22.77
3	2.09400	10.40	22.31	20.24	32.71	30.64	56.00	46.00	-23.29	-15.36
4	5.93000	10.50	29.82	29.10	40.32	39.60	60.00	50.00	-19.68	-10.40
5	12.83800	10.62	25.77	19.43	36.39	30.05	60.00	50.00	-23.61	-19.95
6	22.11000	10.81	40.82	29.50	51.63	40.31	60.00	50.00	-8.37	-9.69

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

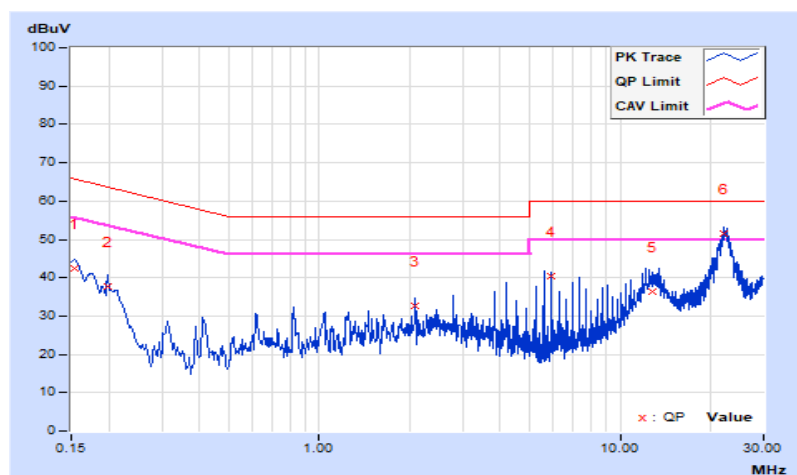

7.3 Unwanted Emissions below 1 GHz


Test Mode A

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 68 % RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	34.85	24.9 QP	40.0	-15.1	2.00 H	71	37.7	-12.8
2	149.31	35.2 QP	43.5	-8.3	2.00 H	169	47.4	-12.2
3	250.19	33.4 QP	46.0	-12.6	1.00 H	142	47.0	-13.6
4	425.76	32.9 QP	46.0	-13.1	1.00 H	170	41.2	-8.3
5	646.92	28.5 QP	46.0	-17.5	1.50 H	123	32.2	-3.7
6	839.95	35.4 QP	46.0	-10.6	2.00 H	68	35.9	-0.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

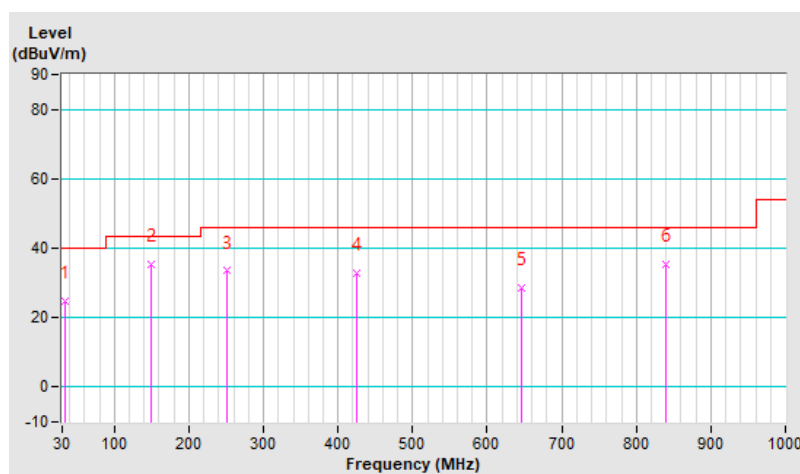


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 68 % RH
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	33.88	34.3 QP	40.0	-5.7	2.00 V	116	47.2	-12.9
2	125.06	37.3 QP	43.5	-6.2	1.50 V	130	50.9	-13.6
3	250.19	31.4 QP	46.0	-14.6	1.00 V	350	45.0	-13.6
4	514.03	27.4 QP	46.0	-18.6	1.00 V	135	33.5	-6.1
5	644.01	28.8 QP	46.0	-17.2	2.00 V	197	32.5	-3.7
6	874.87	32.6 QP	46.0	-13.4	1.50 V	216	33.0	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

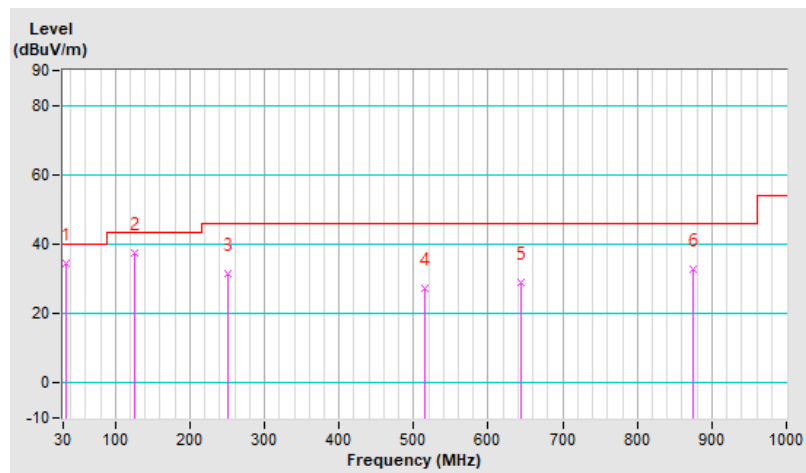


Test Mode B

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 68 % RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.56	29.8 QP	40.0	-10.2	1.00 H	238	46.0	-16.2
2	125.06	30.6 QP	43.5	-12.9	2.00 H	279	44.2	-13.6
3	146.40	30.9 QP	43.5	-12.6	1.00 H	107	43.2	-12.3
4	220.12	31.1 QP	46.0	-14.9	1.50 H	228	46.6	-15.5
5	514.03	28.4 QP	46.0	-17.6	2.00 H	196	34.5	-6.1
6	749.74	33.5 QP	46.0	-12.5	1.00 H	172	34.4	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

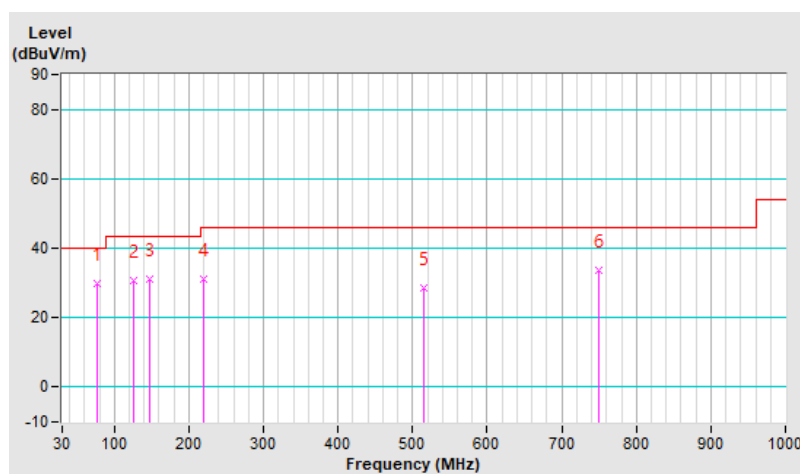


RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 68 % RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.61	33.7 QP	40.0	-6.3	2.00 V	18	46.0	-12.3
2	76.56	32.3 QP	40.0	-7.7	1.00 V	218	48.5	-16.2
3	144.46	29.0 QP	43.5	-14.5	1.00 V	123	41.4	-12.4
4	219.15	30.6 QP	46.0	-15.4	1.50 V	201	46.1	-15.5
5	527.61	31.6 QP	46.0	-14.4	1.00 V	290	37.4	-5.8
6	995.15	33.9 QP	54.0	-20.1	1.00 V	150	32.9	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

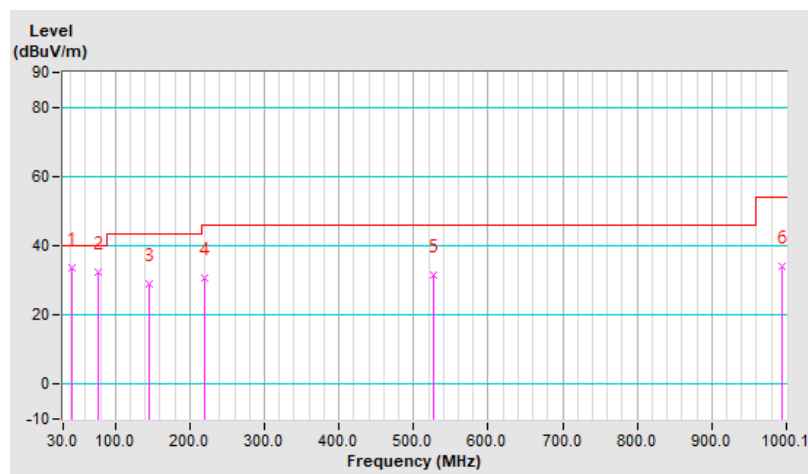

7.4 Unwanted Emissions above 1 GHz

RF Mode	802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	18.8 °C, 62.7 % RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.6 PK			1.55 H	84	73.3	35.3
2	*2437.00	106.4 AV			1.55 H	84	71.1	35.3
3	4874.00	53.0 PK	74.0	-21.0	3.46 H	135	41.3	11.7
4	4874.00	39.3 AV	54.0	-14.7	3.46 H	135	27.6	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	116.6 PK			1.99 V	179	81.3	35.3
2	*2437.00	114.4 AV			1.99 V	179	79.1	35.3
3	4874.00	53.2 PK	74.0	-20.8	3.22 V	27	41.5	11.7
4	4874.00	39.6 AV	54.0	-14.4	3.22 V	27	27.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	24 °C, 68 % RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.6 PK	74.0	-14.4	1.56 H	82	25.3	34.3
2	2390.00	46.8 AV	54.0	-7.2	1.56 H	82	12.5	34.3
3	*2437.00	110.3 PK			1.56 H	82	76.1	34.2
4	*2437.00	104.0 AV			1.56 H	82	69.8	34.2
5	2483.50	60.3 PK	74.0	-13.7	1.56 H	82	26.1	34.2
6	2483.50	46.7 AV	54.0	-7.3	1.56 H	82	12.5	34.2
7	4874.00	53.4 PK	74.0	-20.6	1.16 H	131	46.9	6.5
8	4874.00	38.9 AV	54.0	-15.1	1.16 H	131	32.4	6.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.99 V	183	23.2	34.3
2	2390.00	47.0 AV	54.0	-7.0	1.99 V	183	12.7	34.3
3	*2437.00	118.3 PK			1.99 V	183	84.1	34.2
4	*2437.00	110.1 AV			1.99 V	183	75.9	34.2
5	2483.50	59.6 PK	74.0	-14.4	1.99 V	183	25.4	34.2
6	2483.50	46.9 AV	54.0	-7.1	1.99 V	183	12.7	34.2
7	4874.00	53.2 PK	74.0	-20.8	3.88 V	302	46.7	6.5
8	4874.00	39.7 AV	54.0	-14.3	3.88 V	302	33.2	6.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 68 % RH
Tested By	Thomas Cheng		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	2.00 H	311	26.6	34.3
2	2390.00	47.4 AV	54.0	-6.6	2.00 H	311	13.1	34.3
3	*2422.00	99.7 PK			2.00 H	311	65.4	34.3
4	*2422.00	87.2 AV			2.00 H	311	52.9	34.3
5	4884.00	50.8 PK	74.0	-23.2	2.49 H	80	45.9	4.9
6	4884.00	38.4 AV	54.0	-15.6	2.49 H	80	33.5	4.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	2.01 V	169	26.7	34.3
2	2390.00	47.5 AV	54.0	-6.5	2.01 V	169	13.2	34.3
3	*2422.00	113.8 PK			2.01 V	169	79.5	34.3
4	*2422.00	101.2 AV			2.01 V	169	66.9	34.3
5	4884.00	51.0 PK	74.0	-23.0	3.28 V	301	46.1	4.9
6	4884.00	38.5 AV	54.0	-15.5	3.28 V	301	33.6	4.9


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge

Frequency Range	2.31 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--

802.11ax (HE40) Channel 3

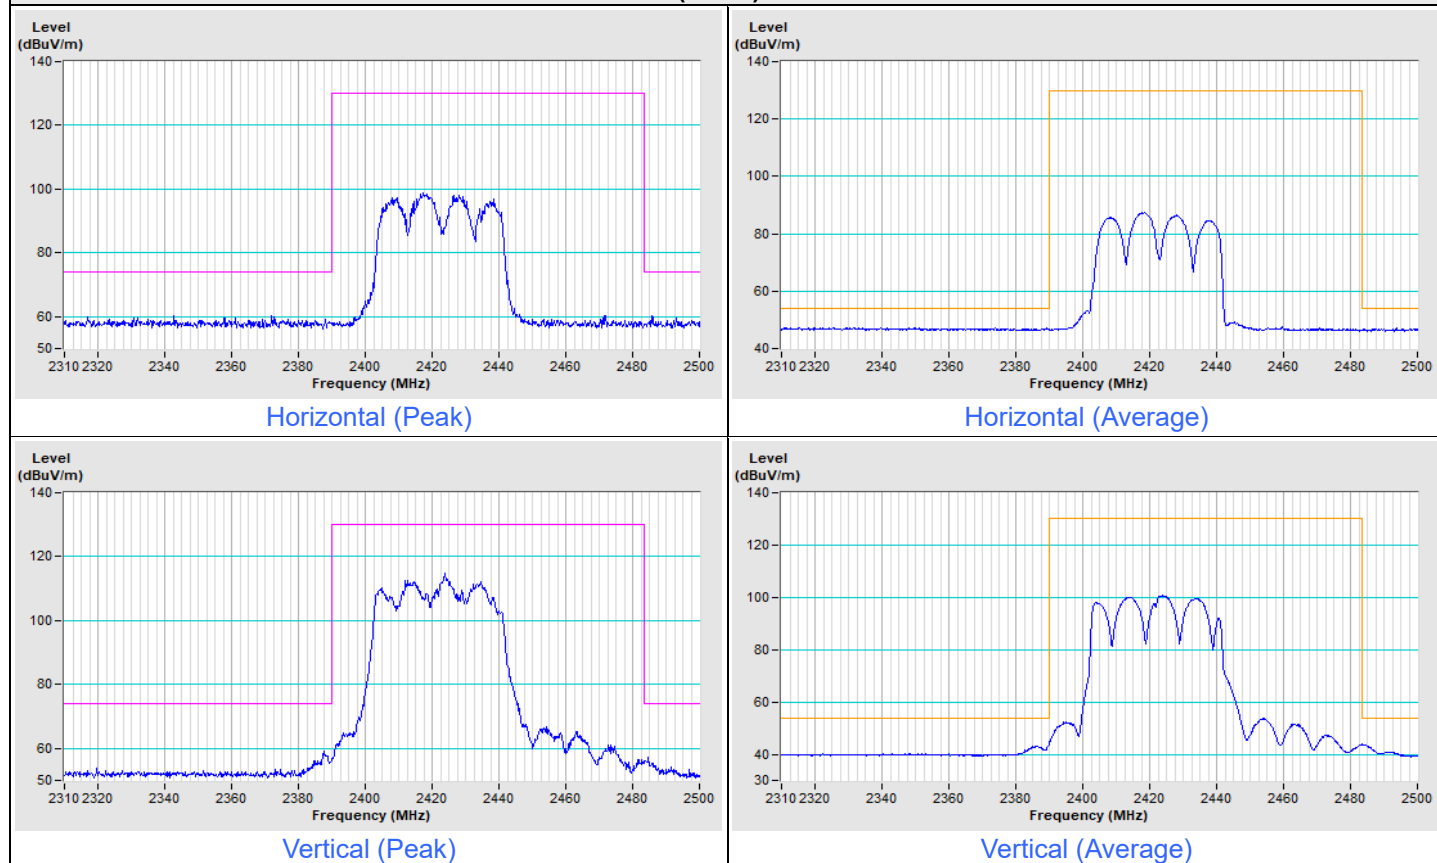

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---