




FCC RADIO TEST REPORT

FCC ID : U8G-P1BE08
Equipment : Peplink Pepwave Wireless Product
Brand Name : **PEPWAVE**

Model Name : AP One Enterprise
APO-ENTR
Applicant : PISMO LABS TECHNOLOGY LIMITED
A8, 5/F, HK Spinners Industrial Building, Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Hong Kong
Manufacturer : PISMO LABS TECHNOLOGY LIMITED
A8, 5/F, HK Spinners Industrial Building, Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Hong Kong
Standard : FCC Part 15 Subpart E §15.407

The product was received on Dec. 11, 2025 and testing was performed from Jan. 08, 2026 to May 07, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
3 Test Result	13
3.1 Fundamental Maximum EIRP Measurement	13
3.2 Unwanted Emissions Measurement.....	14
4 List of Measuring Equipment.....	18
5 Measurement Uncertainty	19
Appendix A. Conducted Test Results	
Appendix B. Radiated Spurious Emission Test Data	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5D1130C	01	Initial issue of report	May 25, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)	Fundamental Maximum EIRP	Pass	-
3.2	15.407(b)	Unwanted Emissions	Pass	-

Note: This is a spot check report. The difference is that BLE, TDWR and Zero-Wait functionality is disabled by software, placed the Nor and EMMC components, removed TPM and NAND components. Refer to the original applicant report number FR381846AE for verification of output power and spurious emissions.

Conformity Assessment Condition:	
1.	The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2.	The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".
Disclaimer:	
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.	

Reviewed by: Lewis Ho

Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	
Wi-Fi 2.4GHz 802.11b/g/n/ac/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, and Wi-Fi 6GHz 802.11ax/be	

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

<Antenna Information>

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Senao	5718A0738300	PIFA	I-Pex	2.4G	Radio 1
2	Senao	5718A0739300	PIFA	I-Pex	2.4G	
3	Senao	5718A0740300	PIFA	I-Pex	2.4G	
4	Senao	5718A0741300	PIFA	I-Pex	2.4G	
5	Senao	5718A0742300	PIFA	I-Pex	5G	Radio 2
6	Senao	5718A0743300	PIFA	I-Pex	5G	
7	Senao	5718A0744300	PIFA	I-Pex	5G	
8	Senao	5718A0745300	PIFA	I-Pex	5G	
9	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100089	Alford loop	I-Pex	6E	Radio 3
10	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100090	Alford loop	I-Pex	6E	
11	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100091	Alford loop	I-Pex	6E	
12	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100092	Alford loop	I-Pex	6E	

Ant.	Port	Gain (dBi)								
		2.4G	5G				6E			
			UNII-1	UNII-2A	UNII-2C	UNII-3	6.175G	6.475G	6.695G	6.995G
1	1	2.82	-	-	-	-	-	-	-	-
2	2	2.39	-	-	-	-	-	-	-	-
3	3	2.33	-	-	-	-	-	-	-	-
4	4	2.69	-	-	-	-	-	-	-	-
5	1	-	4.81	4.19	5.45	4.98	-	-	-	-
6	2	-	2.63	3.44	5.31	5.17	-	-	-	-
7	3	-	5.06	5.29	4.27	3.96	-	-	-	-
8	4	-	3.72	3.52	4.66	4.51	-	-	-	-
9	1	-	-	-	-	-	4.96	4.99	4.98	4.78
10	2	-	-	-	-	-	4.72	4.74	4.53	4.69
11	3	-	-	-	-	-	4.88	4.63	4.47	4.94
12	4	-	-	-	-	-	4.77	4.84	4.61	4.26

Composite Gain (dBi)									
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	6.175G	6.475G	6.695G	6.995G
DG [1SS]	6.46	7.31	7.57	8.57	8.92	9.98	9.93	9.53	9.86
DG [2SS]	3.46	5.06	5.29	5.57	5.92	6.98	6.93	6.53	6.86
DG [4SS]	2.82	5.06	5.29	5.45	5.17	4.96	4.99	4.98	4.94

Note 1: The EUT has thirteen antennas.

Note 2: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP381814.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX)

Ant. 5 (port 1), Ant. 6 (port 2), Ant. 7 (port 3) and Ant. 8 (port 4) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode (4TX/4RX)

Ant. 9 (port 1), Ant. 10 (port 2), Ant. 11(port 3) and Ant. 12 (port 4) could transmit/receive simultaneously.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- ♦FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦FCC KDB 662911 D01 Multiple Transmitter Output v02r01
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Y Plane with Adapter as worst plane.

2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							
BW 320M	Channel	31							
	Freq. (MHz)	6105							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	63							
	Freq. (MHz)	6265							



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							
BW 320M	Channel	127							
	Freq. (MHz)	6585							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	159							
	Freq. (MHz)	6745							



BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	191							
	Freq. (MHz)	6905							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225				229			
	Freq. (MHz)	7075				7095			
BW 40M	Channel	227							
	Freq. (MHz)	7085							

BW 20M	Channel	233							
	Freq. (MHz)	7115							



2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT320	MCS0


TXBF Mode

Modulation	Data Rate
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT320	MCS0

Remark:

1. Based on ANSI C63.10 clause 5.6.2.2, b) Spurious emissions, measure the mode with the highest output power and the mode with highest output power spectral density for each modulation family.
2. The detailed Radiated test modes are shown in Appendix C.

2.3 Connection Diagram of Test System

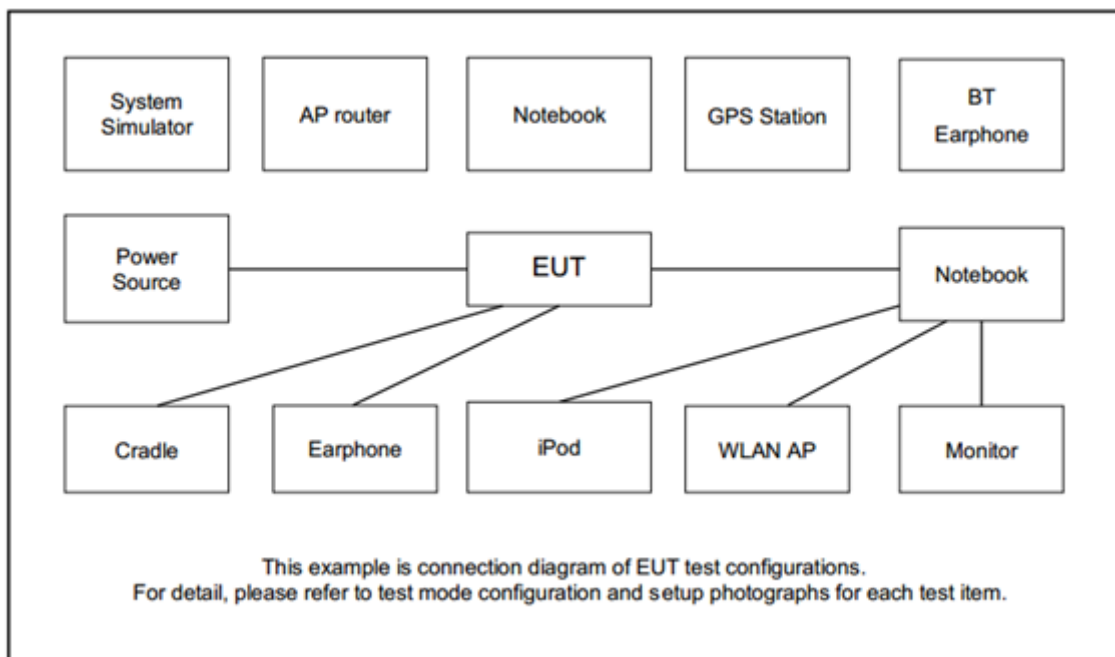

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	IdeaPad Gaming	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QSPR Version 6.00.00228.1" for MIMO Mode and "Tera Term Version 4.95" for TXBF Mode for was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Fundamental Maximum EIRP Measurement

3.1.1 Limit of Fundamental Maximum EIRP

<FCC CFR 15.407>

(a)(5) For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.1.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

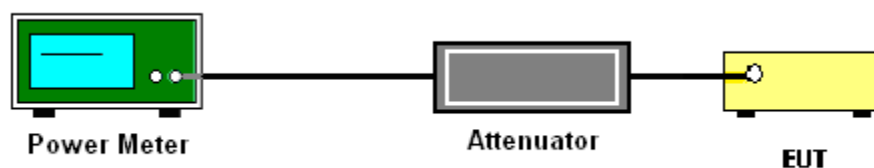

3.1.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.

3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.2.2 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.3
- 7 (Peak)	88.3

According 987594 D02 U-NII 6GHz EMC Measurement v03 section G:

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.2.3 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.2.4 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.2.5 Test Setup


For radiated emissions below 30MHz

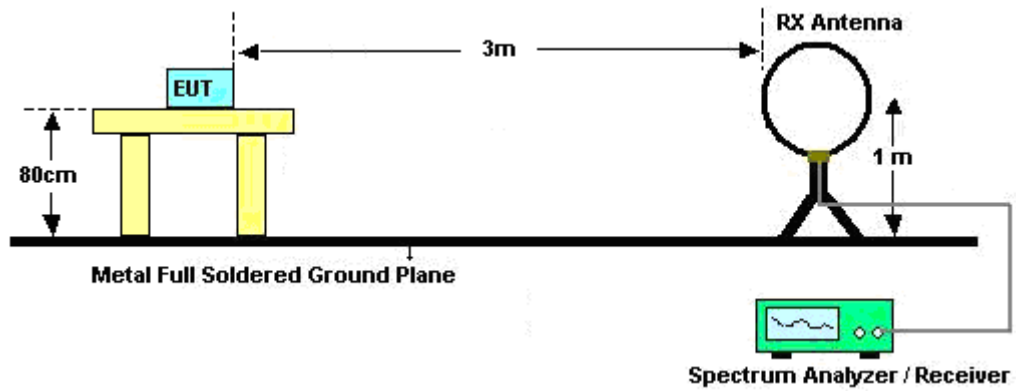


For radiated emissions from 30MHz to 1GHz

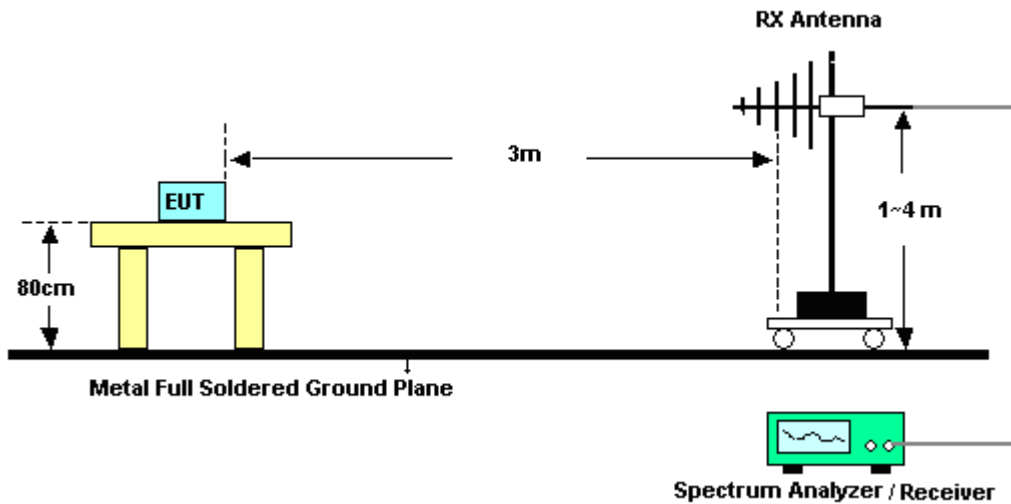

For radiated test from 1GHz to 18GHz

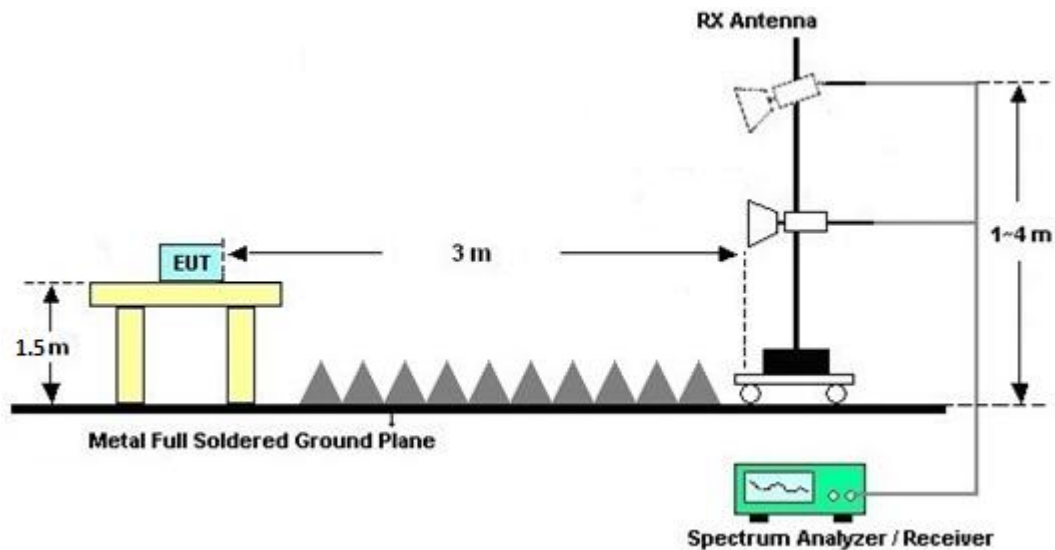

For radiated test above 18GHz

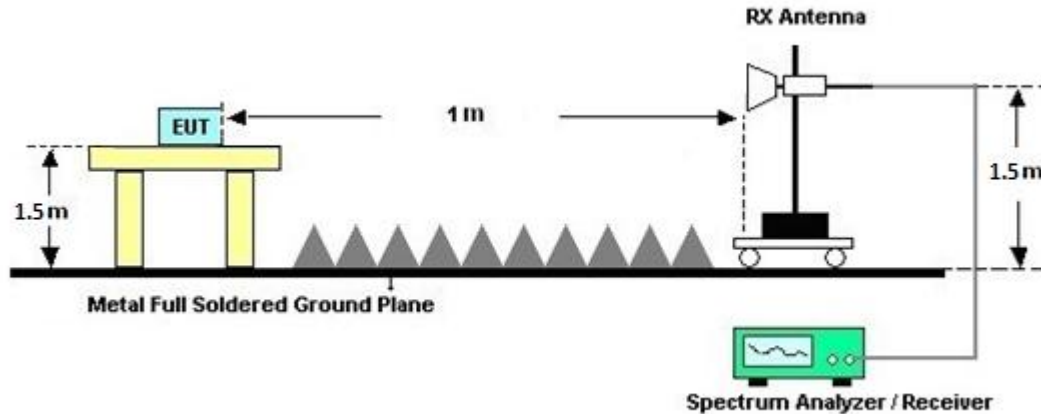

3.2.6 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.2.8 Duty Cycle

Please refer to Appendix C.

3.2.9 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Jan. 15, 2026 ~ May 07, 2026	Nov. 03, 2026	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-23010013 (NO:100)	10MHz~8GHz	Jul. 18, 2025	Jan. 15, 2026 ~ May 07, 2026	Jul. 17, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Jan. 15, 2026 ~ May 07, 2026	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Jan. 15, 2026 ~ May 07, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Jan. 15, 2026 ~ May 07, 2026	N/A	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Jan. 08, 2026~ Jan. 12, 2026	Dec. 10, 2026	Radiation (03CH23-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D-06	62028 & 003	30MHz~1GHz	Nov. 26, 2025	Jan. 08, 2026~ Jan. 12, 2026	Nov. 25, 2026	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 13, 2025	Jan. 08, 2026~ Jan. 12, 2026	Jul. 12, 2026	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	1GHz~18GHz	Sep. 26, 2025	Jan. 08, 2026~ Jan. 12, 2026	Sep. 25, 2026	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jul. 02, 2025	Jan. 08, 2026~ Jan. 12, 2026	Jul. 01, 2026	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 26, 2025	Jan. 08, 2026~ Jan. 12, 2026	Aug. 25, 2026	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Jan. 08, 2026~ Jan. 12, 2026	Aug. 25, 2026	Radiation (03CH23-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	1225	18GHz~40GHz	Jul. 02, 2025	Jan. 08, 2026~ Jan. 12, 2026	Jul. 01, 2026	Radiation (03CH23-HY)
Hygrometer	TECEPEL	DTM-303A	TP210001	N/A	Nov. 06, 2025	Jan. 08, 2026~ Jan. 12, 2026	Nov. 05, 2026	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 08, 2026~ Jan. 12, 2026	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 08, 2026~ Jan. 12, 2026	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 08, 2026~ Jan. 12, 2026	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019122	RK-002348	N/A	N/A	Jan. 08, 2026~ Jan. 12, 2026	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	30MHz~40GHz	Nov. 25, 2025	Jan. 08, 2026~ Jan. 12, 2026	Nov. 24, 2026	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/231119/231122	30MHz~40GHz	Nov. 25, 2025	Jan. 08, 2026~ Jan. 12, 2026	Nov. 24, 2026	Radiation (03CH23-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.70 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20 dB
--	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70 dB
--	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	21~25	°C
Test Date:	2026/1/15~2026/5/7	Relative Humidity:	51~54	%

<non-TXBF Mode>

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT20	MCS0	4	5955	Full	1.60	1.60	1.40	1.60	7.57	4.96	12.53	30.00	Pass
EHT20	MCS0	4	6195	Full	1.60	1.50	1.60	1.90	7.67	4.96	12.63	30.00	Pass
EHT20	MCS0	4	6415	Full	0.00	0.70	0.60	1.10	6.64	4.96	11.60	30.00	Pass
EHT40	MCS0	4	5965	Full	5.20	5.10	5.00	5.20	11.15	4.96	16.11	30.00	Pass
EHT40	MCS0	4	6205	Full	5.10	5.10	5.00	5.00	11.07	4.96	16.03	30.00	Pass
EHT40	MCS0	4	6405	Full	3.60	3.80	3.80	3.90	9.80	4.96	14.76	30.00	Pass
EHT80	MCS0	4	5985	Full	7.70	7.40	7.50	7.50	13.55	4.96	18.51	30.00	Pass
EHT80	MCS0	4	6225	Full	7.90	7.70	7.60	7.70	13.75	4.96	18.71	30.00	Pass
EHT80	MCS0	4	6385	Full	7.20	7.10	7.20	7.20	13.20	4.96	18.16	30.00	Pass
EHT160	MCS0	4	6025	Full	9.20	9.10	9.20	9.20	15.20	4.96	20.16	30.00	Pass
EHT160	MCS0	4	6185	Full	10.10	10.30	10.10	10.40	16.25	4.96	21.21	30.00	Pass
EHT160	MCS0	4	6345	Full	9.60	9.60	9.70	9.80	15.70	4.96	20.66	30.00	Pass
EHT320	MCS0	4	6105	Full	12.80	12.60	12.60	12.40	18.62	4.96	23.58	30.00	Pass
EHT320	MCS0	4	6265	Full	12.60	12.50	12.30	12.30	18.45	4.96	23.41	30.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT20	MCS0	4	6435	Full	1.00	0.90	1.10	1.10	7.05	4.99	12.04	30.00	Pass
EHT20	MCS0	4	6475	Full	1.00	1.10	0.70	1.00	6.97	4.99	11.96	30.00	Pass
EHT20	MCS0	4	6515	Full	0.50	0.70	0.60	0.80	6.67	4.99	11.66	30.00	Pass
EHT40	MCS0	4	6445	Full	4.00	3.70	4.00	3.70	9.87	4.99	14.86	30.00	Pass
EHT40	MCS0	4	6485	Full	3.30	3.10	3.50	3.50	9.37	4.99	14.36	30.00	Pass
EHT80	MCS0	4	6465	Full	7.20	7.10	7.30	7.00	13.17	4.99	18.16	30.00	Pass

U-NII-6 straddle channel MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT40	MCS0	4	6525	Full	2.50	2.60	2.60	2.70	8.62	4.99	13.61	30.00	Pass
EHT80	MCS0	4	6545	Full	6.20	6.10	6.10	6.40	12.22	4.99	17.21	30.00	Pass
EHT160	MCS0	4	6505	Full	10.10	10.20	10.30	10.40	16.27	4.99	21.26	30.00	Pass
EHT320	MCS0	4	6425	Full	13.60	13.30	13.00	13.20	19.30	4.99	24.29	30.00	Pass
EHT320	MCS0	4	6585	Full	13.80	13.50	13.50	13.80	19.67	4.99	24.66	30.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT20	MCS0	4	6535	Full	0.40	0.30	0.20	0.40	6.35	4.98	11.33	30.00	Pass
EHT20	MCS0	4	6695	Full	2.60	2.80	2.70	2.90	8.77	4.98	13.75	30.00	Pass
EHT40	MCS0	4	6565	Full	3.50	3.20	3.60	3.30	9.42	4.98	14.40	30.00	Pass
EHT40	MCS0	4	6685	Full	2.80	2.90	3.00	3.20	9.00	4.98	13.98	30.00	Pass
EHT80	MCS0	4	6625	Full	6.20	6.10	6.30	6.30	12.25	4.98	17.23	30.00	Pass
EHT80	MCS0	4	6705	Full	6.10	6.00	5.90	6.10	12.05	4.98	17.03	30.00	Pass
EHT80	MCS0	4	6785	Full	7.20	7.30	7.40	7.70	13.42	4.98	18.40	30.00	Pass
EHT160	MCS0	4	6665	Full	8.40	8.60	9.00	9.20	14.83	4.98	19.81	30.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT20	MCS0	4	6875	Full	0.90	1.10	0.90	1.30	7.07	4.98	12.05	30.00	Pass
EHT40	MCS0	4	6885	Full	3.00	3.10	3.30	3.20	9.17	4.98	14.15	30.00	Pass
EHT80	MCS0	4	6865	Full	6.90	7.20	7.20	7.70	13.28	4.98	18.26	30.00	Pass
EHT160	MCS0	4	6825	Full	9.40	10.10	9.80	10.30	15.93	4.98	20.91	30.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT20	MCS0	4	6895	Full	1.10	1.40	1.40	1.50	7.37	4.94	12.31	30.00	Pass
EHT20	MCS0	4	6995	Full	0.90	0.70	0.50	1.20	6.85	4.94	11.79	30.00	Pass
EHT20	MCS0	4	7095	Full	1.00	0.90	0.50	1.10	6.90	4.94	11.84	30.00	Pass
EHT20	MCS0	4	7115	Full	0.80	0.90	0.30	0.50	6.65	4.94	11.59	30.00	Pass
EHT40	MCS0	4	6925	Full	3.90	3.90	3.90	3.90	9.92	4.94	14.86	30.00	Pass
EHT40	MCS0	4	7005	Full	4.20	3.80	4.00	4.20	10.07	4.94	15.01	30.00	Pass
EHT40	MCS0	4	7085	Full	4.60	4.30	4.30	4.30	10.40	4.94	15.34	30.00	Pass
EHT80	MCS0	4	6945	Full	6.60	6.50	6.50	6.60	12.57	4.94	17.51	30.00	Pass
EHT80	MCS0	4	7025	Full	6.40	6.20	6.20	6.20	12.27	4.94	17.21	30.00	Pass
EHT160	MCS0	4	6985	Full	9.20	8.90	8.60	8.40	15.00	4.94	19.94	30.00	Pass

U-NII-8 straddle channel MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT320	MCS0	4	6745	Full	13.50	13.60	13.50	13.60	19.57	4.94	24.51	30.00	Pass
EHT320	MCS0	4	6905	Full	12.40	12.30	12.00	12.00	18.20	4.94	23.14	30.00	Pass

<TXBF Mode>

TEST RESULTS DATA
EIRP Power Table

U-NII-5 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM				
EHT20	MCS0	4	5955	Full	3.10	3.80	3.10	3.30	9.36	4.96	14.32	30.00	Pass
EHT20	MCS0	4	6195	Full	4.90	4.80	5.10	5.00	10.97	4.96	15.93	30.00	Pass
EHT20	MCS0	4	6415	Full	4.60	5.40	5.30	5.50	11.23	4.96	16.19	30.00	Pass
EHT40	MCS0	4	5965	Full	7.20	7.50	7.30	7.20	13.32	4.96	18.28	30.00	Pass
EHT40	MCS0	4	6205	Full	9.00	9.10	9.10	9.00	15.07	4.96	20.03	30.00	Pass
EHT40	MCS0	4	6405	Full	9.80	10.10	10.00	10.00	16.00	4.96	20.96	30.00	Pass
EHT80	MCS0	4	5985	Full	9.60	9.60	9.30	9.40	15.50	4.96	20.46	30.00	Pass
EHT80	MCS0	4	6225	Full	10.40	10.30	10.30	10.10	16.30	4.96	21.26	30.00	Pass
EHT80	MCS0	4	6385	Full	11.60	11.90	11.80	11.70	17.77	4.96	22.73	30.00	Pass
EHT160	MCS0	4	6025	Full	13.60	13.40	13.70	13.40	19.55	4.96	24.51	30.00	Pass
EHT160	MCS0	4	6185	Full	14.30	14.40	14.50	14.30	20.40	4.96	25.36	30.00	Pass
EHT160	MCS0	4	6345	Full	15.60	15.70	15.70	15.20	21.58	4.96	26.54	30.00	Pass
EHT320	MCS0	4	6105	Full	15.00	15.00	15.10	15.00	21.05	4.96	26.01	30.00	Pass
EHT320	MCS0	4	6265	Full	16.10	16.00	15.90	15.90	22.00	4.96	26.96	30.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-6 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM				
EHT20	MCS0	4	6435	Full	4.60	4.90	4.90	4.40	10.73	4.99	15.72	30.00	Pass
EHT20	MCS0	4	6475	Full	2.80	3.10	3.00	2.70	8.92	4.99	13.91	30.00	Pass
EHT20	MCS0	4	6515	Full	6.00	6.10	6.20	6.10	12.12	4.99	17.11	30.00	Pass
EHT40	MCS0	4	6445	Full	11.20	11.10	11.00	11.00	17.10	4.99	22.09	30.00	Pass
EHT40	MCS0	4	6485	Full	8.90	8.90	9.00	8.80	14.92	4.99	19.91	30.00	Pass
EHT80	MCS0	4	6465	Full	11.30	11.20	11.10	11.00	17.17	4.99	22.16	30.00	Pass

U-NII-6 straddle channel MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM				
EHT40	MCS0	4	6525	Full	8.40	8.50	8.50	8.60	14.52	4.99	19.51	30.00	Pass
EHT80	MCS0	4	6545	Full	11.90	11.90	11.80	12.10	17.95	4.99	22.94	30.00	Pass
EHT160	MCS0	4	6505	Full	6.50	6.50	6.40	6.60	12.52	4.99	17.51	30.00	Pass
EHT320	MCS0	4	6425	Full	16.70	16.70	16.50	16.70	22.67	4.99	27.66	30.00	Pass
EHT320	MCS0	4	6585	Full	17.80	17.90	17.90	17.80	23.87	4.99	28.86	30.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-7 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM				
EHT20	MCS0	4	6535	Full	4.70	4.80	4.70	4.80	10.77	4.98	15.75	30.00	Pass
EHT20	MCS0	4	6695	Full	4.00	4.20	4.10	4.30	10.17	4.98	15.15	30.00	Pass
EHT40	MCS0	4	6565	Full	7.50	7.70	7.60	7.60	13.62	4.98	18.60	30.00	Pass
EHT40	MCS0	4	6685	Full	6.80	7.10	7.00	6.90	12.97	4.98	17.95	30.00	Pass
EHT80	MCS0	4	6625	Full	10.90	11.00	10.80	11.00	16.95	4.98	21.93	30.00	Pass
EHT80	MCS0	4	6705	Full	8.80	8.80	8.60	8.80	14.77	4.98	19.75	30.00	Pass
EHT80	MCS0	4	6785	Full	11.80	12.10	11.90	11.90	17.95	4.98	22.93	30.00	Pass
EHT160	MCS0	4	6665	Full	14.70	14.80	15.10	15.00	20.92	4.98	25.90	30.00	Pass

U-NII-7 straddle channel MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config.	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM				
EHT20	MCS0	4	6875	Full	2.00	2.40	2.50	2.80	8.45	4.98	13.43	30.00	Pass
EHT40	MCS0	4	6885	Full	10.70	10.70	10.90	10.80	16.80	4.98	21.78	30.00	Pass
EHT80	MCS0	4	6865	Full	9.90	10.10	9.80	10.30	16.05	4.98	21.03	30.00	Pass
EHT160	MCS0	4	6825	Full	13.60	14.00	14.10	14.20	20.00	4.98	24.98	30.00	Pass

TEST RESULTS DATA
EIRP Power Table

U-NII-8 MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT20	MCS0	4	6895	Full	4.30	4.90	4.60	4.90	10.70	4.94	15.64	30.00	Pass
EHT20	MCS0	4	6995	Full	5.30	5.40	5.00	5.30	11.27	4.94	16.21	30.00	Pass
EHT20	MCS0	4	7095	Full	4.20	4.20	4.00	4.10	10.15	4.94	15.09	30.00	Pass
EHT20	MCS0	4	7115	Full	2.30	2.50	2.20	2.30	8.35	4.94	13.29	30.00	Pass
EHT40	MCS0	4	6925	Full	8.10	8.10	7.80	8.00	14.02	4.94	18.96	30.00	Pass
EHT40	MCS0	4	7005	Full	9.50	9.30	9.30	9.40	15.40	4.94	20.34	30.00	Pass
EHT40	MCS0	4	7085	Full	8.80	8.60	8.40	8.40	14.57	4.94	19.51	30.00	Pass
EHT80	MCS0	4	6945	Full	9.60	9.10	9.10	9.30	15.30	4.94	20.24	30.00	Pass
EHT80	MCS0	4	7025	Full	11.40	11.10	11.10	11.40	17.27	4.94	22.21	30.00	Pass
EHT160	MCS0	4	6985	Full	14.20	13.60	13.70	13.80	19.85	4.94	24.79	30.00	Pass

U-NII-8 straddle channel MIMO													
Mod.	Data Rate	NTX	Freq. (MHz)	RU Config	Conducted Power (dBm)					DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 2	Ant 3	Ant 4	SUM		SUM		
EHT320	MCS0	4	6745	Full	18.20	18.20	18.40	18.40	24.32	4.94	29.26	30.00	Pass
EHT320	MCS0	4	6905	Full	16.80	17.20	17.00	16.70	22.95	4.94	27.89	30.00	Pass



Appendix B. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li and Karl Hou	Temperature :	20.9 ~ 22.4°C
		Relative Humidity :	58.0 ~ 63.7 %

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-8	6.875-7.125	4Tx	802.11be EHT20	233	7115	MCS0	Full RU	-
Mode 2	U-NII-7	6.525-6.875	4Tx	802.11be EHT320	159	6745	MCS0	Full RU	LF

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11be EHT20	233	7125.01	63.72	68.20	-4.48	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	233	14230.00	55.54	88.20	-32.66	V	Peak	Pass	Full RU	Harmonic
2	802.11be EHT320	159	800.18	39.76	46.00	-6.24	H	Peak	Pass	-	LF



Mode	1																																																																									
	Band Edge																																																																									
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_Full RU_7115MHz																																																																									
ANT	0																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2026-01-09 Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.01</td><td>77.13</td><td>88.20</td><td>-11.07</td><td>59.60</td><td>36.65</td><td>12.60</td><td>35.52</td><td>3.00</td><td>200</td><td>214</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.01	77.13	88.20	-11.07	59.60	36.65	12.60	35.52	3.00	200	214	Peak	Level (dBuV/m) Date: 2026-01-09 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7115.00</td><td>99.98</td><td>-----</td><td>-----</td><td>82.48</td><td>36.64</td><td>12.59</td><td>35.52</td><td>3.79</td><td>200</td><td>214</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7115.00	99.98	-----	-----	82.48	36.64	12.59	35.52	3.79	200	214	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1 7125.01	77.13	88.20	-11.07	59.60	36.65	12.60	35.52	3.00	200	214	Peak																																																															
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1 7115.00	99.98	-----	-----	82.48	36.64	12.59	35.52	3.79	200	214	Peak																																																															
Avg	Level (dBuV/m) Date: 2026-01-09 Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7125.01</td><td>63.72</td><td>68.20</td><td>-4.48</td><td>46.19</td><td>36.65</td><td>12.60</td><td>35.52</td><td>3.00</td><td>200</td><td>214</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7125.01	63.72	68.20	-4.48	46.19	36.65	12.60	35.52	3.00	200	214	Average	Level (dBuV/m) Date: 2026-01-09 Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7115.00</td><td>92.03</td><td>-----</td><td>-----</td><td>74.50</td><td>36.65</td><td>12.60</td><td>35.52</td><td>3.00</td><td>200</td><td>214</td><td>Average</td></tr></table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7115.00	92.03	-----	-----	74.50	36.65	12.60	35.52	3.00	200	214	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1 7125.01	63.72	68.20	-4.48	46.19	36.65	12.60	35.52	3.00	200	214	Average																																																															
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																
1 7115.00	92.03	-----	-----	74.50	36.65	12.60	35.52	3.00	200	214	Average																																																															





Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_Full RU_7115MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-01-09 PEAK_BE(UNII)_6E Site : 03CH23-HY Condition: PEAK_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7125.01</td><td>71.78</td><td>88.20</td><td>-16.42</td><td>54.25</td><td>36.65</td><td>12.60</td><td>35.52</td><td>3.80</td><td>400 114 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7125.01	71.78	88.20	-16.42	54.25	36.65	12.60	35.52	3.80	400 114 Peak	Level (dBuV/m) Date: 2026-01-09 PEAK(UNII)_6E Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7115.00</td><td>95.99</td><td>-----</td><td>-----</td><td>78.46</td><td>36.65</td><td>12.60</td><td>35.52</td><td>3.80</td><td>400 114 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7115.00	95.99	-----	-----	78.46	36.65	12.60	35.52	3.80	400 114 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 7125.01	71.78	88.20	-16.42	54.25	36.65	12.60	35.52	3.80	400 114 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 7115.00	95.99	-----	-----	78.46	36.65	12.60	35.52	3.80	400 114 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-01-09 AVG_BE(UNII)_6E Site : 03CH23-HY Condition: AVG_BE(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7125.01</td><td>59.09</td><td>68.20</td><td>-9.11</td><td>41.56</td><td>36.65</td><td>12.60</td><td>35.52</td><td>3.80</td><td>400 114 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7125.01	59.09	68.20	-9.11	41.56	36.65	12.60	35.52	3.80	400 114 Average	Level (dBuV/m) Date: 2026-01-09 AVG(UNII)_6E Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:0.300kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 7115.00</td><td>87.48</td><td>-----</td><td>-----</td><td>69.98</td><td>36.64</td><td>12.59</td><td>35.52</td><td>3.79</td><td>400 114 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 7115.00	87.48	-----	-----	69.98	36.64	12.59	35.52	3.79	400 114 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 7125.01	59.09	68.20	-9.11	41.56	36.65	12.60	35.52	3.80	400 114 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																	
1 7115.00	87.48	-----	-----	69.98	36.64	12.59	35.52	3.79	400 114 Average																																																																																	



Mode	1																																																																																																															
	Harmonic																																																																																																															
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_Full RU_7115MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2026-01-09 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14230.00</td><td>55.50</td><td>88.20</td><td>-32.70</td><td>36.82</td><td>41.14</td><td>17.93</td><td>43.11</td><td>0.40</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>21345.00</td><td>39.15</td><td>74.00</td><td>-34.85</td><td>53.70</td><td>38.20</td><td>20.16</td><td>63.37</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	14230.00	55.50	88.20	-32.70	36.82	41.14	17.93	43.11	0.40	--	Peak	2	21345.00	39.15	74.00	-34.85	53.70	38.20	20.16	63.37	-9.54	--	Peak	Level (dBuV/m) Date: 2026-01-09 Site : 03CH23-HY Condition: PEAK(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>14230.00</td><td>55.54</td><td>88.20</td><td>-32.66</td><td>36.86</td><td>41.14</td><td>17.93</td><td>43.11</td><td>0.40</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>21345.00</td><td>39.58</td><td>74.00</td><td>-34.42</td><td>54.13</td><td>38.20</td><td>20.16</td><td>63.37</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	14230.00	55.54	88.20	-32.66	36.86	41.14	17.93	43.11	0.40	--	Peak	2	21345.00	39.58	74.00	-34.42	54.13	38.20	20.16	63.37	-9.54	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	14230.00	55.50	88.20	-32.70	36.82	41.14	17.93	43.11	0.40	--	Peak																																																																																																					
2	21345.00	39.15	74.00	-34.85	53.70	38.20	20.16	63.37	-9.54	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	14230.00	55.54	88.20	-32.66	36.86	41.14	17.93	43.11	0.40	--	Peak																																																																																																					
2	21345.00	39.58	74.00	-34.42	54.13	38.20	20.16	63.37	-9.54	--	Peak																																																																																																					

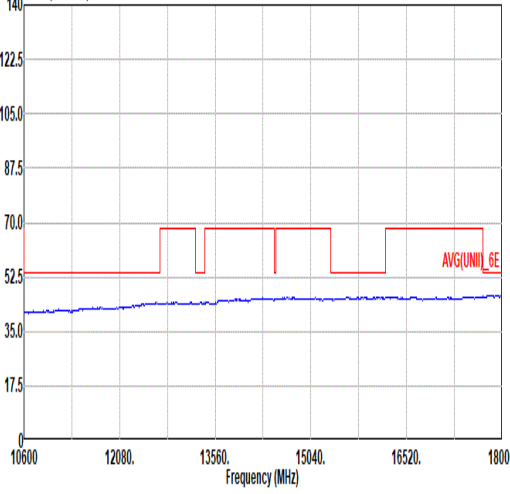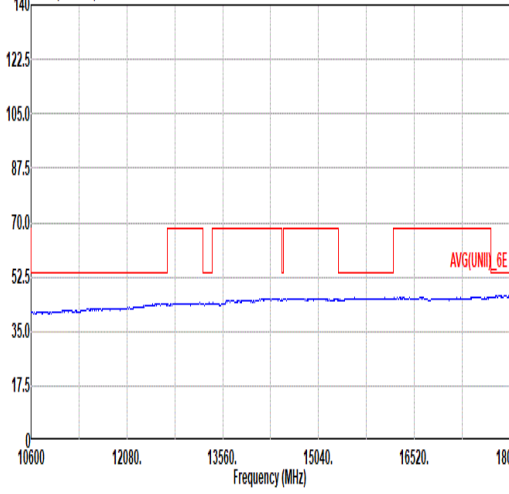

Mode	1	
	Harmonic	
	U-NII-8_6.875-7.125_802.11be EHT20_CH233_Full RU_7115MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-01-09  Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2026-01-09  Site : 03CH23-HY Condition: AVG(UNII)_6E 3m DRH18-E_LE2C05A18EN_250702 VERTICAL




Mode	2																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	U-NII-7_6.525-6.875_802.11be EHT320_CH159_Full RU_6745MHz																																																																																																																																																																																					
ANT	4Tx																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	Level (dBuV/m) Date: 2026-01-12 Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_251126 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>84.32</td><td>26.79</td><td>40.00</td><td>-13.21</td><td>43.91</td><td>14.31</td><td>0.99</td><td>32.51</td><td>0.09 -- -- Peak</td></tr><tr><td>2</td><td>147.37</td><td>35.46</td><td>43.50</td><td>-8.04</td><td>48.99</td><td>17.37</td><td>1.40</td><td>32.45</td><td>0.15 -- -- Peak</td></tr><tr><td>3</td><td>231.76</td><td>29.92</td><td>46.00</td><td>-16.08</td><td>44.12</td><td>16.39</td><td>1.82</td><td>32.51</td><td>0.10 -- -- Peak</td></tr><tr><td>4</td><td>322.94</td><td>31.68</td><td>46.00</td><td>-14.32</td><td>42.22</td><td>19.53</td><td>2.26</td><td>32.55</td><td>0.22 -- -- Peak</td></tr><tr><td>5</td><td>716.76</td><td>37.18</td><td>46.00</td><td>-8.82</td><td>39.22</td><td>26.91</td><td>3.48</td><td>32.64</td><td>0.21 -- -- Peak</td></tr><tr><td>6</td><td>800.18</td><td>39.76</td><td>46.00</td><td>-6.24</td><td>40.15</td><td>28.07</td><td>3.69</td><td>32.37</td><td>0.22 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	84.32	26.79	40.00	-13.21	43.91	14.31	0.99	32.51	0.09 -- -- Peak	2	147.37	35.46	43.50	-8.04	48.99	17.37	1.40	32.45	0.15 -- -- Peak	3	231.76	29.92	46.00	-16.08	44.12	16.39	1.82	32.51	0.10 -- -- Peak	4	322.94	31.68	46.00	-14.32	42.22	19.53	2.26	32.55	0.22 -- -- Peak	5	716.76	37.18	46.00	-8.82	39.22	26.91	3.48	32.64	0.21 -- -- Peak	6	800.18	39.76	46.00	-6.24	40.15	28.07	3.69	32.37	0.22 -- -- Peak	Level (dBuV/m) Date: 2026-01-12 Site : 03CH23-HY Condition: QP 3m CBL6111D_62028 & 003_251126 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>79.47</td><td>30.81</td><td>40.00</td><td>-9.19</td><td>48.67</td><td>13.58</td><td>0.96</td><td>32.51</td><td>0.11 -- -- Peak</td></tr><tr><td>2</td><td>149.31</td><td>37.08</td><td>43.50</td><td>-6.42</td><td>50.70</td><td>17.25</td><td>1.41</td><td>32.45</td><td>0.17 -- -- Peak</td></tr><tr><td>3</td><td>219.15</td><td>26.40</td><td>46.00</td><td>-19.60</td><td>41.94</td><td>15.10</td><td>1.76</td><td>32.51</td><td>0.11 -- -- Peak</td></tr><tr><td>4</td><td>515.00</td><td>30.56</td><td>46.00</td><td>-15.44</td><td>36.03</td><td>24.25</td><td>2.88</td><td>32.69</td><td>0.09 -- -- Peak</td></tr><tr><td>5</td><td>718.70</td><td>38.37</td><td>46.00</td><td>-7.63</td><td>40.36</td><td>26.96</td><td>3.48</td><td>32.64</td><td>0.21 -- -- Peak</td></tr><tr><td>6</td><td>800.18</td><td>39.14</td><td>46.00</td><td>-6.86</td><td>39.53</td><td>28.07</td><td>3.69</td><td>32.37</td><td>0.22 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	79.47	30.81	40.00	-9.19	48.67	13.58	0.96	32.51	0.11 -- -- Peak	2	149.31	37.08	43.50	-6.42	50.70	17.25	1.41	32.45	0.17 -- -- Peak	3	219.15	26.40	46.00	-19.60	41.94	15.10	1.76	32.51	0.11 -- -- Peak	4	515.00	30.56	46.00	-15.44	36.03	24.25	2.88	32.69	0.09 -- -- Peak	5	718.70	38.37	46.00	-7.63	40.36	26.96	3.48	32.64	0.21 -- -- Peak	6	800.18	39.14	46.00	-6.86	39.53	28.07	3.69	32.37	0.22 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	84.32	26.79	40.00	-13.21	43.91	14.31	0.99	32.51	0.09 -- -- Peak																																																																																																																																																																													
2	147.37	35.46	43.50	-8.04	48.99	17.37	1.40	32.45	0.15 -- -- Peak																																																																																																																																																																													
3	231.76	29.92	46.00	-16.08	44.12	16.39	1.82	32.51	0.10 -- -- Peak																																																																																																																																																																													
4	322.94	31.68	46.00	-14.32	42.22	19.53	2.26	32.55	0.22 -- -- Peak																																																																																																																																																																													
5	716.76	37.18	46.00	-8.82	39.22	26.91	3.48	32.64	0.21 -- -- Peak																																																																																																																																																																													
6	800.18	39.76	46.00	-6.24	40.15	28.07	3.69	32.37	0.22 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	79.47	30.81	40.00	-9.19	48.67	13.58	0.96	32.51	0.11 -- -- Peak																																																																																																																																																																													
2	149.31	37.08	43.50	-6.42	50.70	17.25	1.41	32.45	0.17 -- -- Peak																																																																																																																																																																													
3	219.15	26.40	46.00	-19.60	41.94	15.10	1.76	32.51	0.11 -- -- Peak																																																																																																																																																																													
4	515.00	30.56	46.00	-15.44	36.03	24.25	2.88	32.69	0.09 -- -- Peak																																																																																																																																																																													
5	718.70	38.37	46.00	-7.63	40.36	26.96	3.48	32.64	0.21 -- -- Peak																																																																																																																																																																													
6	800.18	39.14	46.00	-6.86	39.53	28.07	3.69	32.37	0.22 -- -- Peak																																																																																																																																																																													



Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
4TX	802.11be EHT20 Full RU	91.94	3492.00	0.29	300Hz

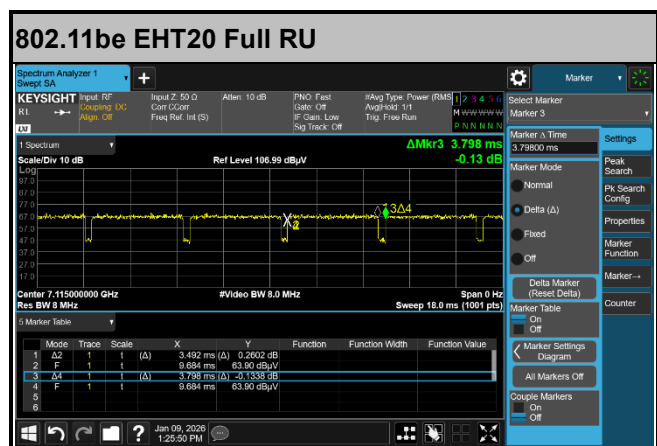

—THE END—