



SAR TEST REPORT

Applicant	Micronet
FCC ID	U8O-A9
Product	SmarTab-8
Brand	TREQ
Model	SmarTab-8
Report No.	R1912A0704-S1
Issue Date	March 17, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **IEEE 1528- 2013, ANSI C95.1: 1992/IEEE C95.1: 1991**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Yu Wang

Approved by: Guangchang Fan

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location.....	4
1.4	Laboratory Environment.....	5
2	Statement of Compliance	6
3	Description of Equipment under Test.....	7
4	Test Specification, Methods and Procedures	9
5	Operational Conditions during Test	10
5.3	Test Positions.....	10
5.4	Measurement Variability	12
5.5	Test Configuration	13
5.5.1	GSM Test Configuration	13
5.5.2	UMTS Test Configuration	13
5.5.2.2	WCDMA Test Configuration	14
5.5.3	LTE Test Configuration	17
5.5.4	Wi-Fi Test Configuration	19
6	SAR Measurements System Configuration	20
6.1	SAR Measurement Set-up	20
6.2	DASY5 E-field Probe System.....	21
6.3	SAR Measurement Procedure	22
7	Main Test Equipment.....	24
8	Tissue Dielectric Parameter Measurements & System Verification	25
8.1	Tissue Verification	25
8.2	System Performance Check.....	27
8.3	SAR System Validation	30
9	Normal and Maximum Output Power	31
9.1	GSM Mode	31
9.2	WCDMA Mode	32
9.3	LTE Mode.....	33
9.4	WLAN Mode.....	45
9.5	Bluetooth Mode	47
10	Measured and Reported (Scaled) SAR Results	48
10.1	EUT Antenna Locations	48
10.2	Standalone SAR test exclusion considerations	49
10.3	Measured SAR Results	50
10.4	Simultaneous Transmission Analysis	66
11	Measurement Uncertainty	68
	ANNEX A: Test Layout.....	69
	ANNEX B: System Check Results	71
	ANNEX C: Highest Graph Results.....	79



ANNEX D: Probe Calibration Certificate.....	94
ANNEX E: D750V3 Dipole Calibration Certificate.....	105
ANNEX F: D835V2 Dipole Calibration Certificate.....	113
ANNEX G: D1750V2 Dipole Calibration Certificate	121
ANNEX H: D1900V2 Dipole Calibration Certificate	129
ANNEX I: D2450V2 Dipole Calibration Certificate	137
ANNEX J: D2600V2 Dipole Calibration Certificate	145
ANNEX K: D5GHzV2 Dipole Calibration Certificate	153
ANNEX L: DAE4 Calibration Certificate.....	161



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



1.4 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Table 1: Highest Reported SAR

Mode	Highest Reported SAR (W/kg)
	Product Specific 10-g SAR (Separation 0mm)
GSM 850	1.012
GSM 1900	0.813
WCDMA Band II	0.464
WCDMA Band IV	2.236
WCDMA Band V	0.618
LTE FDD 2	0.388
LTE FDD 4	1.680
LTE FDD 5	0.623
LTE FDD 7	2.808
LTE FDD 12	1.139
LTE FDD 13	0.661
LTE FDD 17	0.938
Wi-Fi (2.4G)	0.133
Wi-Fi (5G)	0.177
BT	/
Date of Testing:	January 7, 2020~ January 11, 2020
Note: 1. The device is in compliance with SAR for Uncontrolled Environment /General Population exposure limits (1.6 W/kg and 4.0 W/kg) specified in ANSI C95.1: 1992/IEEE C95.1: 1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013. 2. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.	

Table 2: Highest Simultaneous Transmission SAR

Exposure Configuration	Product Specific 10-g SAR (Separation 0mm)
Highest Simultaneous Transmission SAR (W/kg)	2.941
Note: 1. The detail for simultaneous transmission consideration is described in chapter 10.3.	

3 Description of Equipment under Test

Client Information

Applicant	Micronet
Applicant address	1865 West 2100 South, Suite 2 Salt Lake City, Utah 84119 United States
Manufacturer	Micronet
Manufacturer address	1865 West 2100 South, Suite 2 Salt Lake City, Utah 84119 United States

General Technologies

Application Purpose:	Original Grant
EUT Stage	Identical Prototype
Model:	SmarTab-8
IMEI:	353436100010544
Hardware Version:	A9: C801_V1.00_PCB
Software Version:	MSTAB8_9.00.2.7.0
Antenna Type:	Internal Antenna
Device Class:	B
Wi-Fi Hotspot	Wi-Fi 2.4G Wi-Fi 5G U-NII-1&U-NII-3
Power Class:	GSM 850:4 GSM 1900:1 UMTS Band II/IV/V:3 LTE FDD 2/4/5/7/12/13/17:3
Power Level	GSM 850:level 5 GSM 1900:level 0 UMTS Band II/IV/V:all up bits LTE FDD 2/4/5/7/12/13/17:max power
EUT Accessory	
Battery	Manufacturer: Howell Model: HWE30100100 6600mAH (ENH.)
Note: The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	

Wireless Technology and Frequency Range

Wireless Technology		Modulation	Operating mode	Tx (MHz)
GSM	850	Voice(GMSK) GPRS(GMSK)	☐ Multi-slot Class:8-1UP ☐ Multi-slot Class:10-2UP	824 ~ 849
	1900	EGPRS(GMSK,8PSK)	☒ Multi-slot Class:12-4UP ☐ Multi-slot Class:33-4UP	1850 ~ 1910
	Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No			
UMTS	Band II	QPSK	HSDPA UE Category:24 HSUPA UE Category:7	1850 ~ 1910
	Band IV			1710 ~ 1755
	Band V			824 ~ 849
LTE	FDD 2	QPSK, 16QAM	Rel.10 /Category 4	1850 ~ 1910
	FDD 4			1710 ~ 1755
	FDD 5			824 ~ 849
	FDD 7			2500 ~ 2570
	FDD 12			699 ~ 716
	FDD 13			777 ~ 787
	FDD 17			704 ~ 716
	Does this device support Carrier Aggregation (CA) ☐ Yes downlink only ☒ No			
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
BT	2.4G	Version 4.2 LE		2402 ~2480
Wi-Fi	2.4G	DSSS,OFDM	802.11b/g/n HT20	2412 ~ 2462
		OFDM	802.11n HT40	2422 ~ 2452
	5G	OFDM	802.11a/n 20M/40M/ ac 20M/40M	5150 ~ 5250
				5725 ~ 5850
Does this device support MIMO ☐ Yes ☒ No				



4 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528- 2013, ANSI C95.1: 1992/IEEE C95.1: 1991, the following FCC Published RF exposure KDB procedures:

248227 D01 802.11 Wi-Fi SAR v02r02
447498 D01 General RF Exposure Guidance v06
648474 D04 Handset SAR v01r03
865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
865664 D02 RF Exposure Reporting v01r02
941225 D01 3G SAR Procedures v03r01
941225 D05 SAR for LTE Devices v02r05
941225 D06 Hotspot Mode v02r01
941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
616217 D04 SAR for laptop and tablets v01r02

5 Operational Conditions during Test

5.3 Test Positions

According to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

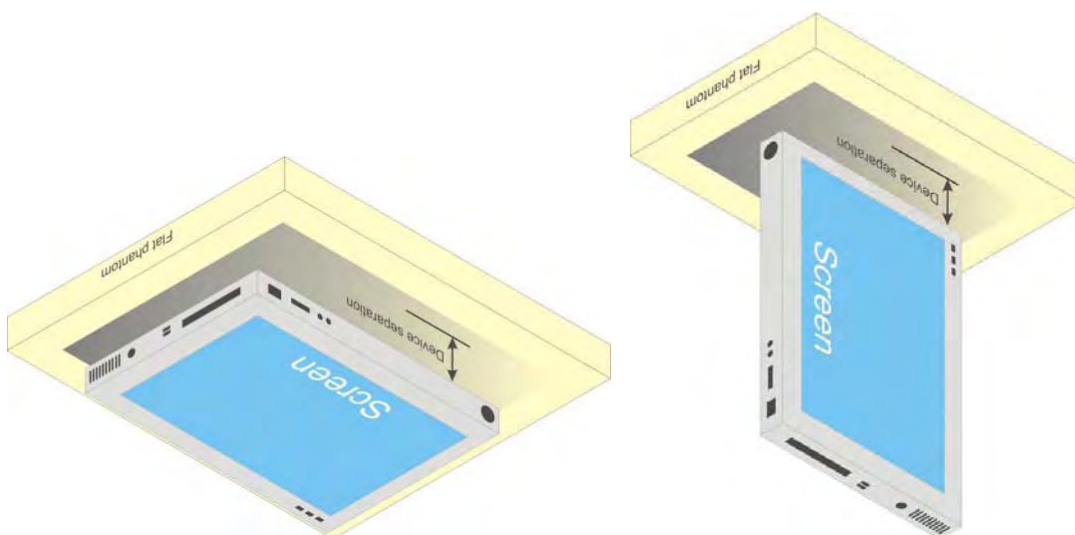


Fig-4.1 Illustration for Tablet Setup

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

(1) The SAR exclusion threshold for distances $\leq 50\text{mm}$ is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$


(2) The SAR exclusion threshold for distances $> 50\text{mm}$ is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{(\text{MHz})}/150)] \text{ mW}$$

b) at $> 1500 \text{ MHz}$ and $\leq 6 \text{ GHz}$

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$$

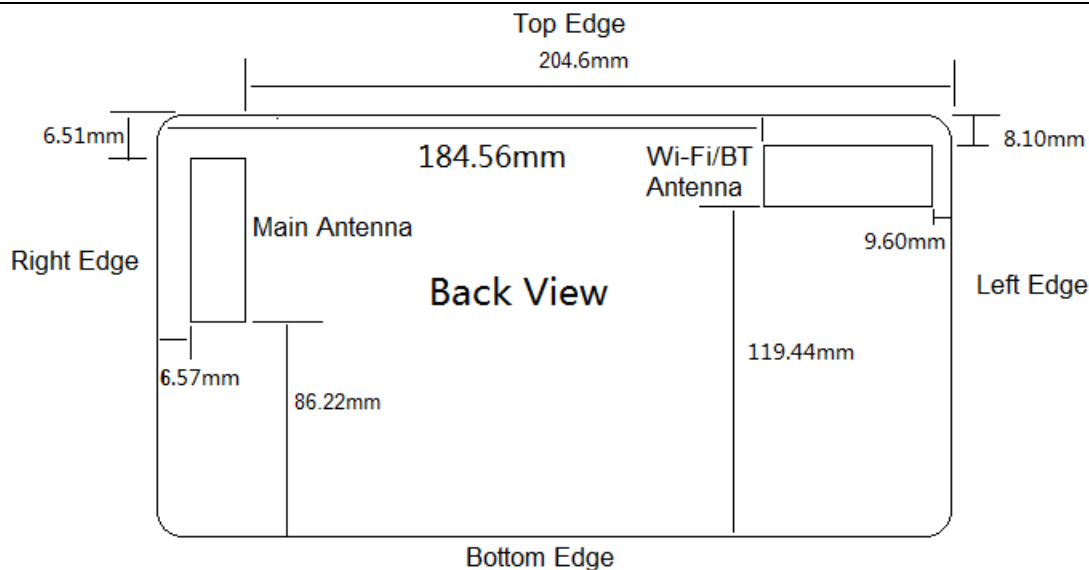

Band	Frequency (MHz)	Max. Tune-up Power (dBm)	Back Side			Left Edge			Right Edge			Top Edge			Bottom Edge		
			Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion	Ant. To Surgace (mm)	Evaluation	Conclusion
GSM 850	836.6	33.50	5.00	409.53	Yes	204.60	903.21	Yes	6.57	311.67	Yes	6.51	314.54	Yes	86.22	242.96	Yes
GSM 1900	1880	31.00	5.00	345.23	Yes	204.60	1580.52	No	6.57	262.73	Yes	6.51	265.15	Yes	86.22	396.72	Yes
WCDMA II	1880	24.50	5.00	77.29	Yes	204.60	1553.73	No	6.57	58.82	Yes	6.51	59.36	Yes	86.22	369.93	NO
WCDMA IV	1732.6	25.00	5.00	83.25	Yes	204.60	1554.32	No	6.57	63.36	Yes	6.51	63.94	Yes	86.22	370.52	NO
WCDMA V	836.6	24.50	5.00	51.56	Yes	204.60	867.41	No	6.57	39.24	Yes	6.51	39.60	Yes	86.22	207.17	Yes
LTE 2	1880	24.00	5.00	68.88	Yes	204.60	1552.89	No	6.57	52.42	Yes	6.51	52.91	Yes	86.22	369.09	NO
LTE 4	1732.5	23.00	5.00	52.53	Yes	204.60	1551.25	No	6.57	39.97	Yes	6.51	40.34	Yes	86.22	367.45	NO
LTE 5	836.5	25.00	5.00	57.84	Yes	204.60	867.94	No	6.57	44.02	Yes	6.51	44.43	Yes	86.22	207.77	Yes
LTE 7	2535	23.00	5.00	63.54	Yes	204.60	1552.35	No	6.57	48.35	Yes	6.51	48.80	Yes	86.22	368.55	NO
LTE 12	707.5	23.50	5.00	37.66	Yes	204.60	732.96	No	6.57	28.66	Yes	6.51	28.93	Yes	86.22	174.60	Yes
LTE 13	782	24.00	5.00	44.43	Yes	204.60	810.42	No	6.57	33.81	Yes	6.51	34.12	Yes	86.22	193.27	Yes
LTE 17	710	24.00	5.00	42.33	Yes	204.60	736.01	No	6.57	32.22	Yes	6.51	32.51	Yes	86.22	175.67	Yes
Wi-Fi 2.4G	2437	19.00	5.00	24.80	Yes	9.60	12.92	Yes	184.56	1348.08	No	8.10	15.31	Yes	119.44	696.88	NO
Wi-Fi 5G (U-NII1)	5250	13.50	5.00	10.26	Yes	9.60	5.34	Yes	184.56	1346.63	No	8.10	6.33	Yes	119.44	695.43	NO
Wi-Fi 5G (U-NII3)	5850	12.50	5.00	8.60	Yes	9.60	4.48	No	184.56	1346.46	No	8.10	5.31	Yes	119.44	695.26	NO
BT	2441	9.00	5.00	2.48	No	9.60	1.29	No	184.56	1345.85	No	8.10	1.53	No	119.44	694.65	NO

5.4 Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

5.5 Test Configuration

5.5.1 GSM Test Configuration

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

Table 3: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

5.5.2 UMTS Test Configuration

5.5.2.1 3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.³ This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

5.5.2.2 WCDMA Test Configuration

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

5.5.2.3 Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

5.5.2.4 Release 5 HSDPA Test Configuration

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 4: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5



4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

5.5.2.5 Release 6 HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 5: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1} = 47/15$ $\beta_{ed2} = 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g. Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.													

Table 6: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)						

Table 7: HS-DSCH UE category
Table 5.1a: FDD HS-DSCH physical layer categories

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)
Category 2	5	3	7298	28800			
Category 3	5	2	7298	28800			
Category 4	5	2	7298	38400			
Category 5	5	1	7298	57600			
Category 6	5	1	7298	67200			
Category 7	10	1	14411	115200			
Category 8	10	1	14411	134400			
Category 9	15	1	20251	172800			
Category 10	15	1	27952	172800			
Category 11	5	2	3630	14400	QPSK		
Category 12	5	1	3630	28800			
Category 13	15	1	35280	259200	QPSK, 16QAM, 64QAM		
Category 14	15	1	42192	259200			
Category 15	15	1	23370	345600	QPSK, 16QAM		
Category 16	15	1	27952	345600			
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM	–	
			23370	345600	–	QPSK, 16QAM	
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM	–	
			27952	345600	–	QPSK, 16QAM	
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM		
Category 20	15	1	42192	518400			
Category 21	15	1	23370	345600	-	-	QPSK, 16QAM
Category 22	15	1	27952	345600			QPSK, 16QAM, 64QAM
Category 23	15	1	35280	518400			
Category 24	15	1	42192	518400			

5.5.3 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the *reported* SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5.5.4 Wi-Fi Test Configuration

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported SAR* for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported SAR* is ≤ 0.8 W/kg or all required test positions are tested.
 - ✧ For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - ✧ When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported SAR* is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported SAR* is ≤ 1.2 W/kg or all required test channels are considered.
 - ✧ The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.


To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

6 SAR Measurements System Configuration

6.1 SAR Measurement Set-up

The DASY system for performing compliance tests consists of the following items:

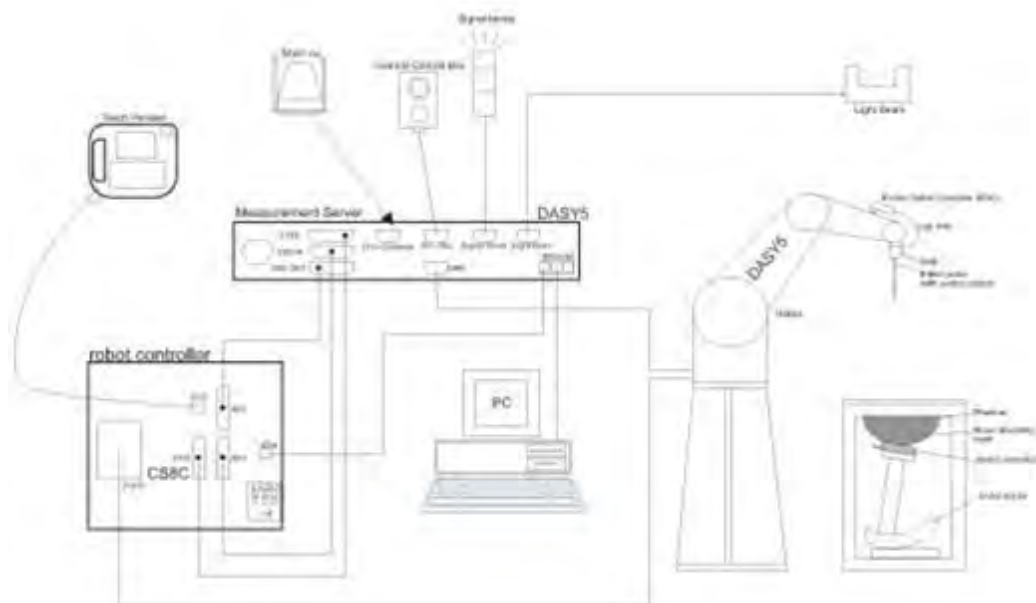

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure Scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \Delta T / \Delta t$$

Where: Δt = Exposure time (30 seconds),
 C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.

Or

$$SAR = |E|^2 \sigma / \rho$$

Where: σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m^3).

6.3 SAR Measurement Procedure

Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤3GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{zoom} Δy_{zoom}			≤2GHz: ≤8mm 2 – 3GHz: ≤5mm*	3 – 4GHz: ≤5mm* 4 – 6GHz: ≤4mm*
Maximum zoom scan spatial resolution, normal to phantom surface	Uniform grid: $\Delta z_{\text{zoom}}(n)$		≤5mm	3 – 4GHz: ≤4mm 4 – 5GHz: ≤3mm 5 – 6GHz: ≤2mm
	Graded grid	$\Delta z_{\text{zoom}}(1)$: between 1 st two points closest to phantom surface	≤4mm	3 – 4GHz: ≤3mm 4 – 5GHz: ≤2.5mm 5 – 6GHz: ≤2mm
		$\Delta z_{\text{zoom}}(n>1)$: between subsequent points	≤1.5• $\Delta z_{\text{zoom}}(n-1)$	
Minimum zoom scan volume	X, y, z		≥30mm	3 – 4GHz: ≥28mm 4 – 5GHz: ≥25mm 5 – 6GHz: ≥22mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is 1.4W/kg, ≤8mm, ≤7mm and ≤5mm zoom scan resolution may be applied, respectively, for 2GHz to 3GHz, 3GHz to 4GHz and 4GHz to 6GHz.				

Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

7 Main Test Equipment

Name of Equipment	Manufacturer	Type/Model	Serial Number	Last Cal.	Cal. Due Date
Network analyzer	Agilent	E5071B	MY42404014	2019-05-19	2020-05-18
Dielectric Probe Kit	HP	85070E	US44020115	2019-05-19	2020-05-18
Power meter	Agilent	E4417A	GB41291714	2019-05-19	2020-05-18
Power sensor	Agilent	N8481H	MY50350004	2019-05-19	2020-05-18
Power sensor	Agilent	E9327A	US40441622	2019-05-19	2020-05-18
Dual directional coupler	Agilent	778D-012	50519	2019-05-19	2020-05-18
Dual directional coupler	Agilent	777D	50146	2019-05-19	2020-05-18
Amplifier	INDEXSAR	IXA-020	0401	2019-05-19	2020-05-18
Wireless communication tester	Anritsu	MT8820C	6201342015	2019-05-19	2020-05-18
Wireless communication tester	Key sight	E5515C	MY48360988	2019-12-15	2020-12-14
Wideband radio communication tester	R&S	CMW 500	113645	2019-05-19	2020-05-18
Base Station Simulator	R&S	CMW270	100673	2019-05-19	2020-05-18
E-field Probe	SPEAG	EX3DV4	3677	2019-06-19	2020-06-18
DAE	SPEAG	DAE4	1317	2019-10-23	2020-10-22
Validation Kit 750MHz	SPEAG	D750V3	1045	2017-08-27	2020-08-26
Validation Kit 835MHz	SPEAG	D835V2	4d020	2017-08-28	2020-08-27
Validation Kit 1750MHz	SPEAG	D1750V2	1023	2019-06-20	2021-06-19
Validation Kit 1900MHz	SPEAG	D1900V2	5d060	2017-08-26	2020-08-25
Validation Kit 2450MHz	SPEAG	D2450V2	786	2017-08-29	2020-08-28
Validation Kit 2600MHz	SPEAG	D2600V2	1025	2018-05-02	2021-05-01
Validation Kit 5GHz	SPEAG	D5GHzV2	1145	2019-10-16	2022-10-15
Temperature Probe	Tianjin jinming	JM222	AA1009129	2019-05-19	2020-05-18
Hygrothermograph	Anymetr	NT-311	20150731	2019-05-19	2020-05-18
Software for Test	Speag	DASY5	52.8.8.1222	/	/
Softwarefor Tissue	Agilent	85070	E06.01.36	/	/

8 Tissue Dielectric Parameter Measurements & System Verification

8.1 Tissue Verification

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance.

Target values

Frequency (MHz)	Water (%)	Salt (%)	Sugar (%)	Glycol (%)	Preventol (%)	Cellulose (%)	ϵ_r	$\sigma(\text{s/m})$
750	41.448	1.452	56	0	0.1	1.0	41.9	0.89
835	41.45	1.45	56	0.00	0.1	1.0	41.5	0.90
1750	55.24	0.31	0	44.45	0	0	40.0	1.34
1900	55.242	0.306	0	44.452	0	0	40.0	1.40
2300	55.242	0.306	0	44.452	0	0	39.5	1.67
2450	62.70	0.50	0	36.80	0	0	39.2	1.80
2600	55.242	0.306	0	44.452	0	0	39.0	1.96
Frequency (MHz)	Water (%)	Diethylenglycol monohexylether (%)			Triton X-100 (%)		ϵ_r	$\sigma(\text{s/m})$
5250	65.53	17.24			17.23		35.9	4.71
5750	65.53	17.24			17.23		35.4	5.22

Measurements results


Frequency (MHz)	Test Date	Temp °C	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within ±5%)	
			ϵ_r	σ (s/m)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
750	1/7/2020	21.5	42.3	0.88	41.9	0.89	0.95	-1.12
835	1/11/2020	21.5	41.4	0.88	41.5	0.90	-0.24	-2.22
1750	1/8/2020	21.5	40.2	1.34	40.0	1.34	0.50	0.00
1900	1/9/2020	21.5	40.1	1.41	40.0	1.40	0.25	0.71
2450	1/10/2020	21.5	38.6	1.81	39.2	1.80	-1.53	0.56
2600	1/10/2020	21.5	38.2	2.01	39.0	1.96	-2.05	2.55
5250	1/10/2020	21.5	35.5	4.80	35.9	4.71	-1.11	1.91
5750	1/10/2020	21.5	34.9	5.21	35.4	5.22	-1.41	-0.19

Note: The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.

8.2 System Performance Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured using the dielectric probe kit and the network analyzer. A system check measurement for every day was made following the determination of the dielectric parameters of the Tissue simulates, using the dipole validation kit. The dipole antenna was placed under the flat section of the twin SAM phantom.

System check is performed regularly on all frequency bands where tests are performed with the DASY system.

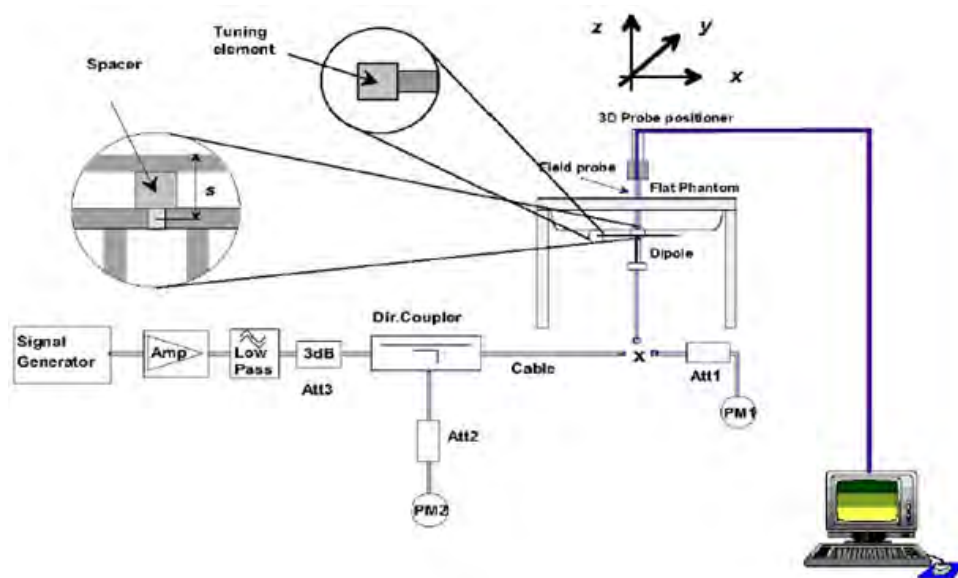

Picture 1 System Performance Check setup



Picture 2 Setup Photo

**Justification for Extended SAR Dipole Calibrations**

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole		Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
Dipole D750V3 SN: 1045	Head Liquid	8/27/2017	-28.5	/	52.5	/
		8/26/2018	-27.6	3.3	53.2	-0.7
		8/25/2019	-27.5	0.4	54.1	-0.9
Dipole D835V2 SN: 4d020	Head Liquid	8/28/2017	-31.9	/	50.3	/
		8/27/2018	-29.0	10.0	46.6	3.7
		8/26/2019	-29.4	-1.4	45.9	0.7
Dipole D1900V2 SN: 5d060	Head Liquid	8/26/2017	-23.4	/	52.0	/
		8/25/2018	-24.7	-5.3	54.4	-2.4
		8/24/2019	-24.9	-0.8	56.2	-1.8
Dipole D2450V2 SN: 786	Head Liquid	8/29/2017	-25.5	/	53.4	/
		8/28/2018	-23.0	10.9	57.2	-3.8
		8/27/2019	-22.2	3.6	56.4	0.8
Dipole D2600V2 SN: 1025	Head Liquid	5/2/2018	-22.0	/	48.1	/
		5/1/2019	-22.5	-2.2	48.7	-0.6

**System Check results**

Frequency (MHz)	Test Date	Temp ℃	250mW /100mW Measured SAR _{1g} (W/kg)	1W Normalized SAR _{1g} (W/kg)	1W Target SAR _{1g} (W/kg)	Δ % (Limit ±10%)	Plot No.
750	1/7/2020	21.5	2.13	8.52	8.34	2.16	1
835	1/11/2020	21.5	2.44	9.76	9.45	3.28	2
1750	1/8/2020	21.5	8.95	35.80	36.10	-0.83	3
1900	1/9/2020	21.5	9.88	39.52	40.10	-1.45	4
2450	1/10/2020	21.5	13.70	54.80	52.60	4.18	5
2600	1/10/2020	21.5	13.90	55.60	54.10	2.77	6
5250	1/10/2020	21.5	7.87	78.70	78.80	-0.13	7
5750	1/10/2020	21.5	7.66	76.60	78.80	-2.79	8
Note: Target Values used derive from the calibration certificate Data Storage and Evaluation.							

8.3 SAR System Validation

Per FCC KDB 865664 D02v01, SAR system verification is required to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles are used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point must be validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

a tabulated summary of the system validation status, measurement frequencies, SAR probes, calibrated signal type(s) and tissue dielectric parameters has been included.

Frequency [MHz]	Date	Probe SN	Probe Type	Probe Cal Point		PERM (Er)	COND (Σ)	CW Validation			Mod. Validation		
								Sensitivity	Probe Linearity	Probe Isotropy	Mod. Type	Duty Factor	PAR
750	6/25/2019	3677	EX3DV4	750	Head	42.81	0.85	PASS	PASS	PASS	FDD	PASS	N/A
835	6/25/2019	3677	EX3DV4	835	Head	42.22	0.90	PASS	PASS	PASS	GMSK	PASS	N/A
1750	6/25/2019	3677	EX3DV4	1750	Head	39.91	1.32	PASS	PASS	PASS	NA	N/A	N/A
1900	6/25/2019	3677	EX3DV4	1900	Head	39.43	1.42	PASS	PASS	PASS	GMSK	PASS	N/A
2450	6/25/2019	3677	EX3DV4	2450	Head	38.19	1.83	PASS	PASS	PASS	OFDM	PASS	PASS
2600	6/25/2019	3677	EX3DV4	2600	Head	37.60	1.99	PASS	PASS	PASS	TDD	PASS	N/A
5250	6/25/2019	3677	EX3DV4	5250	Head	35.36	4.83	PASS	PASS	PASS	OFDM	N/A	PASS
5600	6/25/2019	3677	EX3DV4	5600	Head	34.43	5.29	PASS	PASS	PASS	OFDM	N/A	PASS
5750	6/25/2019	3677	EX3DV4	5750	Head	34.07	5.47	PASS	PASS	PASS	OFDM	N/A	PASS
750	6/25/2019	3677	EX3DV4	750	Body	55.35	0.99	PASS	PASS	PASS	FDD	PASS	N/A
835	6/25/2019	3677	EX3DV4	835	Body	54.88	0.98	PASS	PASS	PASS	GMSK	PASS	N/A
1750	6/25/2019	3677	EX3DV4	1750	Body	51.24	1.44	PASS	PASS	PASS	NA	N/A	N/A
1900	6/25/2019	3677	EX3DV4	1900	Body	50.98	1.56	PASS	PASS	PASS	GMSK	PASS	N/A
2450	6/25/2019	3677	EX3DV4	2450	Body	50.59	1.95	PASS	PASS	PASS	OFDM	PASS	PASS
2600	6/25/2019	3677	EX3DV4	2600	Body	50.14	2.13	PASS	PASS	PASS	TDD	PASS	N/A
5250	6/25/2019	3677	EX3DV4	5250	Body	47.37	5.44	PASS	PASS	PASS	OFDM	N/A	PASS
5600	6/25/2019	3677	EX3DV4	5600	Body	46.42	5.99	PASS	PASS	PASS	OFDM	N/A	PASS
5750	6/25/2019	3677	EX3DV4	5750	Body	46.02	6.23	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664D01v01 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5dB), such as OFDM according to KDB 865664.

9 Normal and Maximum Output Power

KDB 447498 D01 at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

9.1 GSM Mode

GSM 850		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	128 /824.2	190 /836.6	251 /848.8		MAX	128 /824.2	190 /836.6	251 /848.8
GPRS (GMSK)	1 Tx Slot	33.50	32.94	32.95	32.88	9.03	24.47	23.91	23.92	23.85
	2 Tx Slots	32.50	31.89	31.93	32.01	6.02	26.48	25.87	25.91	25.99
	3 Tx Slots	31.00	30.50	30.64	30.74	4.26	26.74	26.24	26.38	26.48
	4 Tx Slots	30.00	29.16	29.34	29.54	3.01	26.99	26.15	26.33	26.53
EGPRS (8PSK)	1 Tx Slot	25.00	24.21	24.76	24.71	9.03	15.97	15.18	15.73	15.68
	2 Tx Slots	24.00	23.04	23.51	23.80	6.02	17.98	17.02	17.49	17.78
	3 Tx Slots	23.00	22.12	22.45	22.50	4.26	18.74	17.86	18.19	18.24
	4 Tx Slots	22.00	21.15	21.47	21.49	3.01	18.99	18.14	18.46	18.48
GSM 1900		Burst-Averaged output power(dBm)				Division Factors	Frame-Averaged output power(dBm)			
		Tune-up	Channel/Frenqucy(MHz)				Tune-up	Channel/Frenqucy(MHz)		
		MAX	512 /1850.2	661 /1880	810 /1909.8		MAX	512 /1850.2	661 /1880	810 /1909.8
GPRS (GMSK)	1 Tx Slot	31.00	30.08	30.24	30.35	9.03	21.97	21.05	21.21	21.32
	2 Tx Slots	30.50	29.84	29.74	29.70	6.02	24.48	23.82	23.72	23.68
	3 Tx Slots	29.50	28.71	28.63	28.87	4.26	25.24	24.45	24.37	24.61
	4 Tx Slots	28.50	27.72	27.70	28.03	3.01	25.49	24.71	24.69	25.02
EGPRS (8PSK)	1 Tx Slot	26.00	25.04	24.88	25.05	9.03	16.97	16.01	15.85	16.02
	2 Tx Slots	25.00	24.14	23.83	23.68	6.02	18.98	18.12	17.81	17.66
	3 Tx Slots	24.00	23.01	23.02	22.84	4.26	19.74	18.75	18.76	18.58
	4 Tx Slots	23.00	22.04	22.01	22.02	3.01	19.99	19.03	19.00	19.01
Notes:The worst-case configuration and mode for SAR testing is determined to be as follows: 1. Standalone: GSM 850 GMSK (GPRS) mode with 4 time slots for Max power, GSM 1900 GMSK (GPRS) mode with 4 time slots for Max power,based on the output power measurements above.										

9.2 WCDMA Mode

The following tests were completed according to the test requirements outlined in the 3GPP TS34.121 specification.

WCDMA		Band II(dBm)				Band IV(dBm)				Band V(dBm)			
Tx Channel		9262	9400	9538	Tune-up	1312	1413	1513	Tune-up	4132	4183	4233	Tune-up
Frequency(MHz)		1852.4	1880	1907.6	Limit	1712.4	1732.6	1752.6	Limit	826.4	836.6	846.6	Limit
RMC	12.2kbps	23.26	23.45	23.83	24.50	24.13	24.22	24.24	25.00	23.59	23.58	23.62	24.50
AMR	12.2kbps	23.10	23.28	23.68	24.50	23.97	24.05	24.09	25.00	23.43	23.41	23.47	24.50
HSDPA	Sub 1	22.68	22.87	23.25	24.00	23.55	23.64	23.66	24.50	23.01	23.00	23.04	24.00
	Sub 2	22.67	22.86	23.24	24.00	23.54	23.63	23.65	24.50	23.00	22.99	23.03	24.00
	Sub 3	22.16	22.35	22.73	23.50	23.03	23.12	23.14	24.00	22.49	22.48	22.52	23.50
	Sub 4	22.15	22.34	22.72	23.50	23.02	23.11	23.13	24.00	22.48	22.47	22.51	23.50
HSUPA	Sub 1	22.64	22.83	23.21	24.00	23.51	23.60	23.62	24.50	22.97	22.96	23.00	24.00
	Sub 2	21.63	21.82	22.20	23.00	22.50	22.59	22.61	23.50	21.96	21.95	21.99	23.00
	Sub 3	22.11	22.31	22.69	23.50	22.98	23.08	23.10	24.00	22.44	22.44	22.48	23.50
	Sub 4	21.60	21.80	22.18	23.00	22.47	22.57	22.59	23.50	21.93	21.93	21.97	23.00
	Sub 5	22.59	22.79	23.17	24.00	23.46	23.56	23.58	24.50	22.92	22.92	22.96	24.00
Note: 1.Per KDB 941225 D01, SAR for each exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".													

9.3 LTE Mode

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

LTE FDD Band 2				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.69	22.71	22.80	24.00
		1	2	23.00	23.05	23.13	24.00
		1	5	22.55	22.68	22.86	24.00
		3	0	22.85	23.02	23.20	24.00
		3	2	22.93	23.08	23.13	24.00
		3	3	22.94	23.04	23.10	24.00
		6	0	21.95	22.11	22.16	23.00
	16QAM	1	0	21.99	22.05	22.19	23.00
		1	2	22.27	22.34	22.50	23.00
		1	5	21.78	22.03	22.09	23.00
		3	0	21.82	21.93	22.14	23.00
		3	2	21.88	22.00	22.12	23.00
		3	3	21.83	22.02	22.05	23.00
		6	0	20.90	21.06	21.14	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	22.72	22.75	22.82	24.00
		1	7	23.04	23.10	23.16	24.00
		1	14	22.59	22.73	22.89	24.00
		8	0	21.98	22.14	22.30	23.00
		8	4	22.05	22.18	22.25	23.00
		8	7	22.04	22.15	22.20	23.00
		15	0	21.98	22.15	22.19	23.00
	16QAM	1	0	22.02	22.07	22.22	23.00
		1	7	22.31	22.39	22.53	23.00
		1	14	21.81	22.07	22.11	23.00
		8	0	20.94	21.06	21.25	22.00



		8	4	21.00	21.13	21.23	22.00
		8	7	20.96	21.14	21.15	22.00
		15	0	20.93	21.10	21.17	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.68	22.73	22.79	24.00
		1	13	23.01	23.06	23.14	24.00
		1	24	22.55	22.68	22.86	24.00
		12	0	21.94	22.09	22.27	23.00
		12	6	22.00	22.14	22.23	23.00
		12	13	22.00	22.13	22.18	23.00
		25	0	21.96	22.14	22.17	23.00
	16QAM	1	0	21.99	22.03	22.19	23.00
		1	13	22.28	22.37	22.50	23.00
		1	24	21.77	22.05	22.08	23.00
		12	0	20.91	21.02	21.23	22.00
		12	6	20.96	21.08	21.20	22.00
		12	13	20.92	21.09	21.12	22.00
		25	0	20.88	21.06	21.15	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.71	22.74	22.81	24.00
		1	25	23.05	23.11	23.17	24.00
		1	49	22.58	22.72	22.88	24.00
		25	0	21.98	22.14	22.30	23.00
		25	13	22.04	22.19	22.26	23.00
		25	25	22.05	22.17	22.20	23.00
		50	0	22.00	22.16	22.25	23.00
	16QAM	1	0	22.01	22.06	22.21	23.00
		1	25	22.31	22.41	22.53	23.00
		1	49	21.80	22.07	22.11	23.00
		25	0	20.95	21.07	21.26	22.00
		25	13	20.99	21.12	21.22	22.00
		25	25	20.96	21.14	21.15	22.00
		50	0	20.92	21.11	21.18	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.69	22.70	22.80	24.00
		1	38	23.02	23.10	23.15	24.00
		1	74	22.54	22.67	22.85	24.00
		36	0	21.95	22.10	22.28	23.00
		36	18	22.00	22.14	22.23	23.00
		36	39	22.01	22.14	22.17	23.00



	16QAM	75	0	21.95	22.12	22.23	23.00
		1	0	21.99	22.04	22.16	23.00
		1	38	22.29	22.38	22.51	23.00
		1	74	21.77	22.03	22.08	23.00
		36	0	20.92	21.05	21.23	22.00
		36	18	20.95	21.07	21.19	22.00
		36	39	20.93	21.10	21.13	22.00
		75	0	20.88	21.06	21.15	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.66	22.66	22.77	24.00
		1	50	23.00	23.06	23.14	24.00
		1	99	22.51	22.66	22.83	24.00
		50	0	21.91	22.05	22.25	23.00
		50	25	21.97	22.10	22.21	23.00
		50	50	21.97	22.09	22.14	23.00
		100	0	21.91	22.07	22.20	23.00
	16QAM	1	0	21.94	22.00	22.14	23.00
		1	50	22.25	22.36	22.47	23.00
		1	99	21.75	22.00	22.06	23.00
		50	0	20.89	21.01	21.20	22.00
		50	25	20.92	21.05	21.16	22.00
		50	50	20.89	21.05	21.10	22.00
		100	0	20.85	21.02	21.13	22.00

LTE FDD Band 4				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	22.25	22.20	22.19	23.00
		1	2	22.45	22.44	22.49	23.00
		1	5	22.09	22.11	22.05	23.00
		3	0	22.37	22.46	22.48	23.00
		3	2	22.45	22.44	22.38	23.00
		3	3	22.40	22.27	22.32	23.00
		6	0	21.41	21.43	21.43	22.00
	16QAM	1	0	21.49	21.50	21.46	22.00
		1	2	21.82	21.66	21.79	22.00
		1	5	21.39	21.31	21.32	22.00
		3	0	21.32	21.39	21.46	22.00
		3	2	21.40	21.33	21.40	22.00
		3	3	21.34	21.24	21.29	22.00
		6	0	20.41	20.41	20.44	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up



				19965/1711.5	20175/1732.5	20385/1753.5	Limit
3MHz	QPSK	1	0	22.28	22.24	22.21	23.00
		1	7	22.49	22.49	22.52	23.00
		1	14	22.13	22.16	22.08	23.00
		8	0	21.50	21.58	21.58	22.00
		8	4	21.57	21.54	21.50	22.00
		8	7	21.50	21.38	21.42	22.00
		15	0	21.44	21.47	21.46	22.00
	16QAM	1	0	21.52	21.52	21.49	22.00
		1	7	21.86	21.71	21.82	22.00
		1	14	21.42	21.35	21.34	22.00
		8	0	20.44	20.52	20.57	21.00
		8	4	20.52	20.46	20.51	21.00
		8	7	20.47	20.36	20.39	21.00
		15	0	20.44	20.45	20.47	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up
				19975/1712.5	20175/1732.5	20375/1752.5	Limit
5MHz	QPSK	1	0	22.24	22.22	22.18	23.00
		1	13	22.46	22.45	22.50	23.00
		1	24	22.09	22.11	22.05	23.00
		12	0	21.46	21.53	21.55	22.00
		12	6	21.52	21.50	21.48	22.00
		12	13	21.46	21.36	21.40	22.00
		25	0	21.42	21.46	21.44	22.00
	16QAM	1	0	21.49	21.48	21.46	22.00
		1	13	21.83	21.69	21.79	22.00
		1	24	21.38	21.33	21.31	22.00
		12	0	20.41	20.48	20.55	21.00
		12	6	20.48	20.41	20.48	21.00
		12	13	20.43	20.31	20.36	21.00
		25	0	20.39	20.41	20.45	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up
				20000/1715	20175/1732.5	20350/1750	Limit
10MHz	QPSK	1	0	22.27	22.23	22.20	23.00
		1	25	22.50	22.50	22.53	23.00
		1	49	22.12	22.15	22.07	23.00
		25	0	21.50	21.58	21.58	22.00
		25	13	21.56	21.55	21.51	22.00
		25	25	21.51	21.40	21.42	22.00
		50	0	21.46	21.48	21.52	22.00
	16QAM	1	0	21.51	21.51	21.48	22.00
		1	25	21.86	21.73	21.82	22.00
		1	49	21.41	21.35	21.34	22.00



		25	0	20.45	20.53	20.58	21.00
		25	13	20.51	20.45	20.50	21.00
		25	25	20.47	20.36	20.39	21.00
		50	0	20.43	20.46	20.48	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	22.25	22.19	22.19	23.00
		1	38	22.47	22.49	22.51	23.00
		1	74	22.08	22.10	22.04	23.00
		36	0	21.47	21.54	21.56	22.00
		36	18	21.52	21.50	21.48	22.00
		36	39	21.47	21.37	21.39	22.00
		75	0	21.41	21.44	21.50	22.00
	16QAM	1	0	21.49	21.49	21.43	22.00
		1	38	21.84	21.70	21.80	22.00
		1	74	21.38	21.31	21.31	22.00
		36	0	20.42	20.51	20.55	21.00
		36	18	20.47	20.40	20.47	21.00
		36	39	20.44	20.32	20.37	21.00
		75	0	20.39	20.41	20.45	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	22.22	22.15	22.16	23.00
		1	50	22.45	22.45	22.50	23.00
		1	99	22.05	22.09	22.02	23.00
		50	0	21.43	21.49	21.53	22.00
		50	25	21.49	21.46	21.46	22.00
		50	50	21.43	21.32	21.36	22.00
		100	0	21.37	21.39	21.47	22.00
	16QAM	1	0	21.44	21.45	21.41	22.00
		1	50	21.80	21.68	21.76	22.00
		1	99	21.36	21.28	21.29	22.00
		50	0	20.39	20.47	20.52	21.00
		50	25	20.44	20.38	20.44	21.00
		50	50	20.40	20.27	20.34	21.00
		100	0	20.36	20.37	20.43	21.00

LTE FDD Band 5				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	23.49	23.51	23.46	25.00
		1	2	23.89	23.79	24.34	25.00
		1	5	23.64	23.55	24.11	25.00



		3	0	22.89	22.79	22.77	24.00
		3	2	22.94	22.88	22.95	24.00
		3	3	23.04	22.81	23.00	24.00
		6	0	22.98	22.84	22.82	24.00
	16QAM	1	0	22.67	22.69	22.73	24.00
		1	2	23.15	23.04	23.21	24.00
		1	5	22.92	22.86	22.86	24.00
		3	0	21.85	21.73	21.78	23.00
		3	2	21.91	21.82	21.94	23.00
		3	3	21.99	21.78	22.00	23.00
		6	0	21.86	21.75	21.84	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	23.52	23.52	23.48	25.00
		1	7	23.93	23.84	24.37	25.00
		1	14	23.67	23.59	24.13	25.00
		8	0	22.93	22.84	22.80	24.00
		8	4	22.98	22.93	22.98	24.00
		8	7	23.09	22.85	23.02	24.00
		15	0	23.02	22.86	22.90	24.00
	16QAM	1	0	22.69	22.72	22.75	24.00
		1	7	23.18	23.08	23.24	24.00
		1	14	22.95	22.88	22.89	24.00
		8	0	21.89	21.78	21.81	23.00
		8	4	21.94	21.86	21.96	23.00
		8	7	22.03	21.83	22.03	23.00
		15	0	21.90	21.80	21.87	23.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	23.50	23.48	23.47	25.00
		1	13	23.90	23.83	24.35	25.00
		1	24	23.63	23.54	24.10	25.00
		12	0	22.90	22.80	22.78	24.00
		12	6	22.94	22.88	22.95	24.00
		12	13	23.05	22.82	22.99	24.00
		25	0	22.97	22.82	22.88	24.00
	16QAM	1	0	22.67	22.70	22.70	24.00
		1	13	23.16	23.05	23.22	24.00
		1	24	22.92	22.84	22.86	24.00
		12	0	21.86	21.76	21.78	23.00
		12	6	21.90	21.81	21.93	23.00
		12	13	22.00	21.79	22.01	23.00
		25	0	21.86	21.75	21.84	23.00



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	23.47	23.44	23.44	25.00
		1	25	23.88	23.79	24.34	25.00
		1	49	23.60	23.53	24.08	25.00
		25	0	22.86	22.75	22.75	24.00
		25	13	22.91	22.84	22.93	24.00
		25	25	23.01	22.77	22.96	24.00
		50	0	22.93	22.77	22.85	24.00
	16QAM	1	0	22.62	22.66	22.68	24.00
		1	25	23.12	23.03	23.18	24.00
		1	49	22.90	22.81	22.84	24.00
		25	0	21.83	21.72	21.75	23.00
		25	13	21.87	21.79	21.90	23.00
		25	25	21.96	21.74	21.98	23.00
		50	0	21.83	21.71	21.82	23.00

LTE FDD Band 7				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	22.41	22.39	22.20	23.00
		1	13	22.59	22.50	22.39	23.00
		1	24	22.50	22.41	22.27	23.00
		12	0	21.46	21.38	21.25	22.00
		12	6	21.45	21.39	21.21	22.00
		12	13	21.52	21.47	21.36	22.00
		25	0	21.44	21.39	21.18	22.00
	16QAM	1	0	21.36	21.23	21.14	22.00
		1	13	21.83	21.74	21.60	22.00
		1	24	21.51	21.45	21.31	22.00
		12	0	20.52	20.44	20.39	21.00
		12	6	20.45	20.38	20.31	21.00
		12	13	20.36	20.30	20.22	21.00
		25	0	20.44	20.42	20.24	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	22.44	22.40	22.22	23.00
		1	25	22.63	22.55	22.42	23.00
		1	49	22.53	22.45	22.29	23.00
		25	0	21.50	21.43	21.28	22.00
		25	13	21.49	21.44	21.24	22.00
		25	25	21.57	21.51	21.38	22.00
		50	0	21.48	21.41	21.26	22.00



	16QAM	1	0	21.38	21.26	21.16	22.00
		1	25	21.86	21.78	21.63	22.00
		1	49	21.54	21.47	21.34	22.00
		25	0	20.56	20.49	20.42	21.00
		25	13	20.48	20.42	20.33	21.00
		25	25	20.40	20.35	20.25	21.00
		50	0	20.48	20.47	20.27	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	22.42	22.36	22.21	23.00
		1	38	22.60	22.54	22.40	23.00
		1	74	22.49	22.40	22.26	23.00
		36	0	21.47	21.39	21.26	22.00
		36	18	21.45	21.39	21.21	22.00
		36	39	21.53	21.48	21.35	22.00
		75	0	21.43	21.37	21.24	22.00
	16QAM	1	0	21.36	21.24	21.11	22.00
		1	38	21.84	21.75	21.61	22.00
		1	74	21.51	21.43	21.31	22.00
		36	0	20.53	20.47	20.39	21.00
		36	18	20.44	20.37	20.30	21.00
		36	39	20.37	20.31	20.23	21.00
		75	0	20.44	20.42	20.24	21.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	22.39	22.32	22.18	23.00
		1	50	22.58	22.50	22.39	23.00
		1	99	22.46	22.39	22.24	23.00
		50	0	21.43	21.34	21.23	22.00
		50	25	21.42	21.35	21.19	22.00
		50	50	21.49	21.43	21.32	22.00
		100	0	21.39	21.32	21.21	22.00
	16QAM	1	0	21.31	21.20	21.09	22.00
		1	50	21.80	21.73	21.57	22.00
		1	99	21.49	21.40	21.29	22.00
		50	0	20.50	20.43	20.36	21.00
		50	25	20.41	20.35	20.27	21.00
		50	50	20.33	20.26	20.20	21.00
		100	0	20.41	20.38	20.22	21.00

LTE FDD Band 12				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23017/699.7	23095/707.5	23173/715.3	



1.4MHz	QPSK	1	0	22.46	22.61	22.66	23.50
		1	2	22.79	22.68	22.84	23.50
		1	5	22.53	22.55	22.76	23.50
		3	0	21.92	21.97	22.00	23.50
		3	2	21.98	22.02	22.11	23.50
		3	3	21.88	22.01	22.06	23.50
		6	0	21.94	21.92	22.05	22.50
	16QAM	1	0	21.97	22.01	22.17	22.50
		1	2	22.16	22.25	22.28	22.50
		1	5	21.65	21.93	21.96	22.50
		3	0	20.89	21.00	21.12	22.50
		3	2	20.87	20.96	21.18	22.50
		3	3	21.00	20.96	20.93	22.50
		6	0	21.86	21.75	21.84	22.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	22.49	22.62	22.68	23.50
		1	7	22.83	22.73	22.87	23.50
		1	14	22.56	22.59	22.78	23.50
		8	0	21.96	22.02	22.03	22.50
		8	4	22.02	22.07	22.14	22.50
		8	7	21.93	22.05	22.08	22.50
		15	0	21.98	21.94	22.13	22.50
	16QAM	1	0	21.99	22.04	22.19	22.50
		1	7	22.19	22.29	22.31	22.50
		1	14	21.68	21.95	21.99	22.50
		8	0	20.93	21.05	21.15	21.50
		8	4	20.90	21.00	21.20	21.50
		8	7	21.04	21.01	20.96	21.50
		15	0	20.90	21.03	21.09	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	22.47	22.58	22.67	23.50
		1	13	22.80	22.72	22.85	23.50
		1	24	22.52	22.54	22.75	23.50
		12	0	21.93	21.98	22.01	22.50
		12	6	21.98	22.02	22.11	22.50
		12	13	21.89	22.02	22.05	22.50
		25	0	21.93	21.90	22.11	22.50
	16QAM	1	0	21.97	22.02	22.14	22.50
		1	13	22.17	22.26	22.29	22.50
		1	24	21.65	21.91	21.96	22.50
		12	0	20.90	21.03	21.12	21.50



		12	6	20.86	20.95	21.17	21.50
		12	13	21.01	20.97	20.94	21.50
		25	0	20.86	20.98	21.06	21.50
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	22.44	22.54	22.64	23.50
		1	25	22.78	22.68	22.84	23.50
		1	49	22.49	22.53	22.73	23.50
		25	0	21.89	21.93	21.98	22.50
		25	13	21.95	21.98	22.09	22.50
		25	25	21.85	21.97	22.02	22.50
		50	0	21.89	21.85	22.08	22.50
	16QAM	1	0	21.92	21.98	22.12	22.50
		1	25	22.13	22.24	22.25	22.50
		1	49	21.63	21.88	21.94	22.50
		25	0	20.87	20.99	21.09	21.50
		25	13	20.83	20.93	21.14	21.50
		25	25	20.97	20.92	20.91	21.50
		50	0	20.83	20.94	21.04	21.50

LTE FDD Band 13				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23205/779.5	23230/782	23255/784.5	
5MHz	QPSK	1	0	23.37	23.42	23.24	24.00
		1	13	23.63	23.67	23.74	24.00
		1	24	23.42	23.39	23.68	24.00
		12	0	22.76	22.85	22.65	23.00
		12	6	22.81	22.52	22.77	23.00
		12	13	22.71	22.57	22.72	23.00
		25	0	22.63	22.77	22.63	23.00
	16QAM	1	0	22.32	22.5	22.43	23.00
		1	13	22.86	22.76	22.87	23.00
		1	24	22.68	22.67	22.54	23.00
		12	0	21.62	21.62	21.51	22.00
		12	6	21.64	21.63	21.53	22.00
		12	13	21.66	21.64	21.74	22.00
		25	0	21.63	21.59	21.62	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				/	23230/782	/	
10MHz	QPSK	1	0	/	23.38	/	24.00
		1	25	/	23.63	/	24.00
		1	49	/	23.38	/	24.00
		25	0	/	22.80	/	23.00



		25	13	/	22.48	/	23.00
		25	25	/	22.52	/	23.00
		50	0	/	22.72	/	23.00
	16QAM	1	0	/	22.46	/	23.00
		1	25	/	22.74	/	23.00
		1	49	/	22.64	/	23.00
		25	0	/	21.58	/	22.00
		25	13	/	21.61	/	22.00
		25	25	/	21.59	/	22.00
		50	0	/	21.55	/	22.00

LTE FDD Band 17				Conducted Power(dBm)			Tune-up Limit
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			
				23755/706.5	23790/710	23825/713.5	
5MHz	QPSK	1	0	23.35	23.31	23.3	24.00
		1	13	23.51	23.49	23.48	24.00
		1	24	23.4	23.33	23.37	24.00
		12	0	22.37	22.43	22.45	23.00
		12	6	22.45	22.46	22.46	23.00
		12	13	22.42	22.42	22.46	23.00
		25	0	22.4	22.46	22.47	23.00
	16QAM	1	0	22.59	22.51	22.53	23.00
		1	13	22.79	22.68	22.77	23.00
		1	24	22.64	22.57	22.52	23.00
		12	0	21.26	21.32	21.38	22.00
		12	6	21.4	21.4	21.41	22.00
		12	13	21.33	21.35	21.39	22.00
		25	0	21.33	21.36	21.38	22.00
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)			Tune-up Limit
				23780/709	23790/710	23800/711	
10MHz	QPSK	1	0	23.32	23.27	23.27	24.00
		1	25	23.49	23.45	23.47	24.00
		1	49	23.37	23.32	23.35	24.00
		25	0	22.33	22.38	22.42	23.00
		25	13	22.42	22.42	22.44	23.00
		25	25	22.38	22.37	22.43	23.00
		50	0	22.36	22.41	22.44	23.00
	16QAM	1	0	22.54	22.47	22.51	23.00
		1	25	22.75	22.66	22.73	23.00
		1	49	22.62	22.54	22.50	23.00
		25	0	21.23	21.28	21.35	22.00
		25	13	21.37	21.38	21.38	22.00



		25	25	21.29	21.30	21.36	22.00
		50	0	21.30	21.32	21.36	22.00

9.4 WLAN Mode

Wi-Fi 2.4G Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)		
		Tune-up	Meas.	TP Set Level
802.11b (1M)	1/2412	18.00	17.04	19
	6/2437	18.00	17.47	19
	11/2462	18.00	17.21	19
802.11g (6M)	1/2412	18.00	17.24	17
	6/2437	18.00	17.24	17
	11/2462	18.00	16.81	17
802.11n-HT20 (MCS0)	1/2412	18.00	16.81	17
	6/2437	18.00	17.01	18
	11/2462	18.00	16.75	19
802.11n-HT40 (MCS0)	3/2422	19.00	17.82	16.5
	6/2437	19.00	18.34	16.5
	9/2452	18.00	16.63	16.5

Note: Initial test configuration is 802.11b mode.

Wi-Fi 5G (U-NII-1) Mode	Channel /Frequency(MHz)	Maximum Output Power (dBm)		
		Tune-up	Meas.	TP Set Level
802.11a (6M)	36/5180	13.00	12.32	17
	40/5200	13.00	12.61	17
	44/5220	13.00	11.56	17
	48/5240	13.00	12.31	17
802.11n-HT20 (MCS0)	36/5180	13.00	12.48	17
	40/5200	13.00	12.79	17
	44/5220	13.00	11.61	17
	48/5240	13.00	12.44	17
802.11n-HT40 (MCS0)	38/5190	13.50	13.18	16.5
	46/5230	13.50	13.08	16.5
802.11ac-VHT20 (6M)	36/5180	13.00	12.42	17
	40/5200	13.00	12.70	17
	44/5220	13.00	11.29	17
	48/5240	13.00	12.44	17
802.11ac-VHT40 (MCS0)	38/5190	13.50	13.12	16.5
	46/5230	13.50	10.28	16.5

Note. Initial test configuration is 802.11n-HT40 mode, since the highest maximum output power

Wi-Fi 5G (U-NII-3)	Channel /Frequency(MHz)	Maximum Output Power (dBm)		
		Tune-up	Meas.	TP Set Level
Mode				
802.11a (6M)	149/5745	12.00	11.21	17
	157/5785	12.00	11.36	17
	165/5825	12.00	11.02	17
802.11n-HT20 (MCS0)	149/5745	12.00	11.23	17
	157/5785	12.00	11.41	17
	165/5825	12.00	11.08	17
802.11n-HT40 (MCS0)	151/5755	12.50	11.78	16.5
	159/5795	12.50	12.05	16.5
802.11ac-HT20 (6M)	149/5745	12.00	11.24	17
	157/5785	12.00	11.42	17
	165/5825	12.00	11.03	17
802.11ac-HT40 (MCS0)	151/5755	9.50	8.73	16.5
	159/5795	12.50	12.05	16.5


Note. Initial test configuration is 802.11n-HT40 mode, since the highest maximum output power.

9.5 Bluetooth Mode

BT	Conducted Power(dBm)			Tune-up Limit (dBm)
	Channel/Frequency(MHz)			
	Ch 0/2402 MHz	Ch 39/2441 MHz	Ch 78/2480 MHz	
GFSK	8.57	8.38	8.02	9.00
π/4DQPSK	6.43	6.35	5.89	7.00
8DPSK	6.46	6.37	5.90	7.00
BLE	Ch 0/2402 MHz	Ch 19/2440 MHz	Ch 39/2480 MHz	Tune-up Limit (dBm)
GFSK	4.02	4.13	3.87	5.00

10 Measured and Reported (Scaled) SAR Results

10.1 EUT Antenna Locations

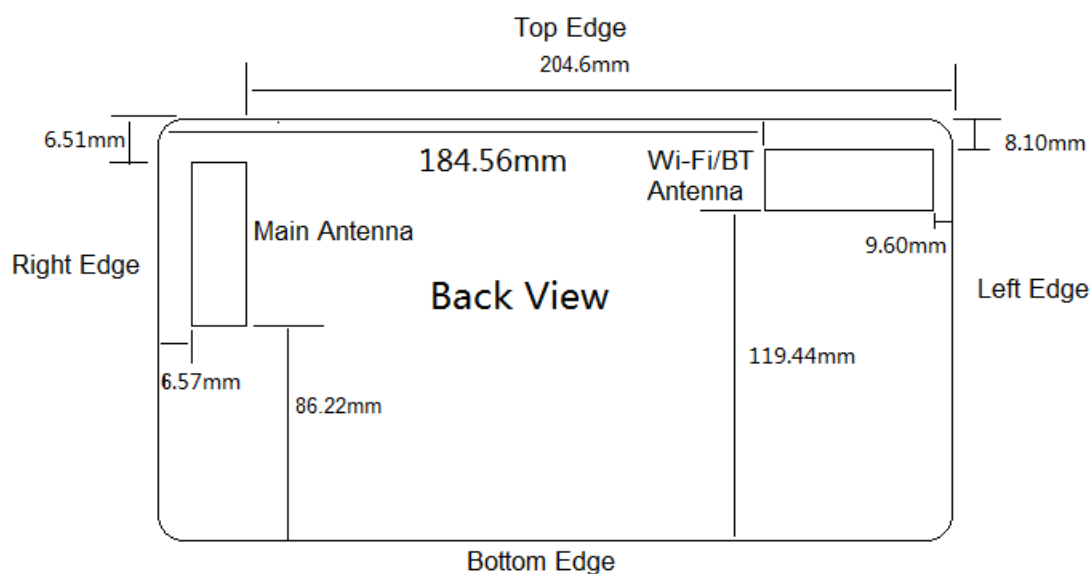

Note: The location of the test is detailed in Section 5.1

10.2 Standalone SAR test exclusion considerations

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for product specific 10-g SAR

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Per KDB 447498 D01, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Bluetooth	Distance (mm)	MAXPower (dBm)	Frequency (MHz)	Ratio	Evaluation
Product Specific 10-g SAR	5	9.00	2480	2.50	No



10.3 Measured SAR Results

Table 8: GSM 850

Test Position	Cover Type	Time slot	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of 10gSAR 4 W/kg (mW/g)					Plot No.
						Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	4Txslots	128/824.2	30.00	29.16	0.834	1.390	0.030	1.21	1.012	9
	standard	4Txslots	190/836.6	30.00	29.34	0.805	1.440	-0.021	1.16	0.937	/
	standard	4Txslots	251/848.8	30.00	29.54	0.658	1.150	0.099	1.11	0.732	/
Front Side	standard	4Txslots	190/836.6	30.00	29.34	0.413	0.728	0.100	1.16	0.481	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	4Txslots	190/836.6	30.00	29.34	0.325	0.601	0.120	1.16	0.378	/
Top Edge	standard	4Txslots	190/836.6	30.00	29.34	0.072	0.129	-0.040	1.16	0.084	/
Bottom Edge	standard	4Txslots	190/836.6	30.00	29.34	0.038	0.067	0.045	1.16	0.044	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											



Table 9: GSM 1900

Test Position	Cover Type	Time slot	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of 10gSAR 4 W/kg (mW/g)					Plot No.
						Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	4Txslots	661/1880	28.50	27.70	0.448	0.968	0.011	1.20	0.539	/
Front Side	standard	4Txslots	661/1880	28.50	27.70	0.154	0.321	0.026	1.20	0.185	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	4Txslots	512/1850.2	28.50	27.72	0.679	1.440	0.032	1.20	0.813	10
	standard	4Txslots	661/1880	28.50	27.70	0.622	1.320	-0.120	1.20	0.748	/
	standard	4Txslots	810/1909.8	28.50	28.03	0.593	1.270	-0.180	1.11	0.661	/
Top Edge	standard	4Txslots	661/1880	28.50	27.70	0.023	0.051	0.017	1.20	0.028	/
Bottom Edge	standard	4Txslots	661/1880	28.50	27.70	0.012	0.024	-0.038	1.20	0.014	/
Note: 1.The value with blue color is the maximum SAR Value of each test band.											
2.When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.											



Table 10: UMTS Band II

Test Position	Cover Type	Channel Type	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of 10gSAR 4 W/kg (mW/g)					Plot No.
						Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	RMC 12.2K	9400/1880	24.50	23.45	0.145	0.317	-0.052	1.27	0.185	/
Front Side	standard	RMC 12.2K	9262/1852.4	24.50	23.26	0.331	0.749	0.039	1.33	0.440	/
	standard	RMC 12.2K	9400/1880	24.50	23.45	0.364	0.814	0.034	1.27	0.464	11
	standard	RMC 12.2K	9538/1907.6	24.50	23.83	0.338	0.771	0.077	1.17	0.394	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	RMC 12.2K	9400/1880	24.50	23.45	0.272	0.565	0.130	1.27	0.346	/
Top Edge	standard	RMC 12.2K	9400/1880	24.50	23.45	0.046	0.091	-0.082	1.27	0.059	/
Bottom Edge	standard	RMC 12.2K	9400/1880	24.50	23.45	0.023	0.048	0.011	1.27	0.029	/

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.



Table 11: UMTS Band IV

Test Position	Cover Type	Channel Type	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of 10gSAR 4 W/kg (mW/g)					Plot No.
						Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	RMC 12.2K	1413/1732.6	25.00	24.22	0.481	1.020	0.028	1.20	0.576	/
Front Side	standard	RMC 12.2K	1413/1732.6	25.00	24.22	0.586	1.250	-0.013	1.20	0.701	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	RMC 12.2K	1312/1712.4	25.00	24.13	1.830	3.890	0.036	1.22	2.236	12
	standard	RMC 12.2K	1413/1732.6	25.00	24.22	1.740	3.710	0.110	1.20	2.082	/
	standard	RMC 12.2K	1513/1752.6	25.00	24.24	1.350	2.890	-0.020	1.19	1.608	/
Top Edge	standard	RMC 12.2K	1413/1732.6	25.00	24.22	0.057	0.123	0.024	1.20	0.068	/
Bottom Edge	standard	RMC 12.2K	1413/1732.6	25.00	24.22	0.095	0.204	-0.010	1.20	0.114	/
Right Edge	Repeated	RMC 12.2K	1312/1712.4	25.00	24.13	1.770	3.840	0.022	1.22	2.163	/

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Measurement Variability

Test Position	Channel/ Frequency(MHz)	MAX Measured SAR _{10g} (W/kg)	1 st Repeated SAR _{10g} (W/kg)	Ratio
Right Edge	1312/1712.4	1.830	1.770	1.03

Note: 1) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

2) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .



Table 12: UMTS Band V

Test Position	Cover Type	Channel Type	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of 10gSAR 4 W/kg (mW/g)					Plot No.
						Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	
Product Specific 10-g SAR (Distance 0mm)											
Back Side	standard	RMC 12.2K	4132/826.4	24.50	23.59	0.501	0.878	0.100	1.23	0.618	13
	standard	RMC 12.2K	4183/836.6	24.50	23.58	0.431	0.707	0.100	1.24	0.533	/
	standard	RMC 12.2K	4233/846.6	24.50	23.62	0.423	0.695	0.150	1.22	0.518	/
Front Side	standard	RMC 12.2K	4183/836.6	24.50	23.58	0.052	0.096	-0.014	1.24	0.064	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	RMC 12.2K	4183/836.6	24.50	23.58	0.103	0.175	0.022	1.24	0.127	/
Top Edge	standard	RMC 12.2K	4183/836.6	24.50	23.58	0.039	0.069	0.015	1.24	0.048	/
Bottom Edge	standard	RMC 12.2K	4183/836.6	24.50	23.58	0.014	0.027	-0.035	1.24	0.017	/

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.



Table 13: LTE Band 2

Test Position	Cover Type	RB allocation	RB offset	Channel/ Frequency (MHz)	Tune-up (dBm)	Measured power (dBm)	Limit of 10gSAR 4 W/kg (mW/g)					Plot No.
							Measured SAR10g	Measured SAR1g	Power Drift (dB)	Scaling Factor	Report SAR10g	
Product Specific 10-g SAR (Distance 0mm)												
Back Side	standard	1	50	18700/1860	24.00	23.00	0.283	0.560	0.08	1.26	0.356	/
	standard	1	50	18900/1880	24.00	23.06	0.239	0.472	-0.01	1.24	0.297	/
	standard	1	50	19100/1900	24.00	23.14	0.318	0.635	0.041	1.22	0.388	14
Front Side	standard	1	50	19100/1900	24.00	23.14	0.285	0.571	-0.035	1.22	0.347	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	1	50	19100/1900	24.00	23.14	0.262	0.525	0.177	1.22	0.319	/
Top Edge	standard	1	50	19100/1900	24.00	23.14	0.024	0.049	-0.085	1.22	0.029	/
Bottom Edge	standard	1	50	19100/1900	24.00	23.14	0.034	0.072	0.06	1.22	0.041	/
Back Side	standard	50%	0	19100/1900	23.00	22.25	0.212	0.435	0.01	1.19	0.252	/
Front Side	standard	50%	0	19100/1900	23.00	22.25	0.245	0.475	-0.018	1.19	0.291	/
Left Edge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Right Edge	standard	50%	0	19100/1900	23.00	22.25	0.207	0.419	0.036	1.19	0.246	/
Top Edge	standard	50%	0	19100/1900	23.00	22.25	0.041	0.078	0.059	1.19	0.049	/
Bottom Edge	standard	50%	0	19100/1900	23.00	22.25	0.025	0.053	-0.017	1.19	0.030	/
Note: 1.The value with blue color is the maximum SAR Value of each test band. 2.For QPSK with 100% RB allocation, SAR is required when and the highest reported SAR for 1 RB and 50% RB allocation in are $\geq$ 50% limit(10g).												