



DATASHEET

SM520 Module

Copyright 2008-2018 Synapse Wireless, All Rights Reserved. All Synapse products are patent pending.
Synapse , the Synapse logo, SNAP, and Portal are all registered trademarks of Synapse Wireless, Inc.

Doc# 116-041507-001-H000

6723 Odyssey Drive // Huntsville, AL 35806 // (877) 982-7888 // synapsewireless.com

CONTENTS

1	Modules Overview	1
2	Specifications	3
3	Electrical Characteristics	5
4	Mechanical Drawings	7
5	Antenna Gain Performance	11
6	Board Mounting Considerations	15
7	Packaging	19
8	Agency Certifications	21

MODULES OVERVIEW

The SNAP Engine Model SM520 series consists of the SM520UF1 part number. It is an IEEE 802.15.4, low-power, highly reliable solution for embedded wireless control and monitoring networks requiring high data rates. It embeds Synapse's SNAP OS, the industry's first Internet-enabled, wireless mesh network operating system, into the Silicon Labs Mighty Gecko EFR32MG12 single-chip 32-bit ARM® Cortex®-M4 core with an integrated transceiver that delivers up to 250Kbits/sec. The Mighty Gecko SoC also includes an integrated power amplifier and LNA for increased range.

SNAP's on-board Python interpreter provides rapid application development and over-the-air programming, while Silicon Labs' low-power RF single-chip design saves board space and lowers power consumption. The modules provide up to 15 channels of operation in the ISM 2.4GHz frequency band.

By default, the SNAP operating system automatically forms a mesh network with other nodes immediately on receiving power. No further configuration is necessary. Multiple unrelated SNAP networks can exist within the same area through several configuration options outlined in the SNAP User Guide available from www.synapsewireless.com

Note: Channel 15 has reduced transmitter power on both internal compact F antenna and external u.FL connection due to FCC band edge restrictions.

Datasheet covers Part Number SM520UF1:

- 38 GPIO with up to 38 A/D inputs
- 1MB flash, 64 KB free for over-the-air uploaded user apps
- Two UART ports for control or transparent data
- **Low power modes: (Not Implemented)**
 - Timed Sleep Mode 1 : na
 - Timed Sleep Mode 2 : na
 - Untimed Sleep Mode : na
- Spread Spectrum (DSSS) technology
- 250 Kbps radio data rate
- 2.4 GHz RF Frequency
- AES 128-bit encryption
- Integrated on-board compact F antenna or U.FL connector
- Surface Mount, Solder-able
- 4K internal EEPROM

- 8 PWM outputs
- Supports over the air firmware upgrades.

SPECIFICATIONS

SM520 Specifications at 25° C and 3.3V unless otherwise noted

Performance	Outdoor LOS Range	1 mile (Integrated F Antenna) 1.2 mile (Ext Antenna u.FL)
	Transmit Power Output	up to +19 dBm
	RF Data Rate	250Kbps
	Receiver Sensitivity	-TBD dBm (1% PER, 250Kbps)
Power Requirements	Supply Voltage	2.0 - 3.6 V
	Transmit Current (Typ@3.3V)	at +19 dBm: 150 mA at +6 dBm: 46mA
	Idle/Receive On (Typ@3.3V)	22.5 mA
	Idle/Receive Off (Typ@3.3V)	6.9 mA
	Sleep Mode Current (Typ@3.3V)	Not Implemented
General	Frequency	ISM 2.4 GHz
	Spreading Method	Direct Sequence (DSSS)
	Modulation	O-QPSK
	Dimensions	29.8mm x 19mm
	Operating Temperature	-40 to 85 deg C.
	Antenna Options	U.FL and on-board compact F antenna
	Weight	3 grams
Networking	Topology	SNAP
	Error Handling	Retries and acknowledgement
	Number of Channels	16 Channels
		15 Full power Channels 1 Reduced Power Channel
Available I/O	UARTS with HW Flow Control	2 Ports
	GPIO	38 total
	ADC	Any GPIO can be ADC input
	PWM	Any GPIO can be PWM output
Agency Approvals	FCC Part 15.247	FCC ID: U90-SM520
	Industry Canada (IC)	IC: 7084A-SM520

You must preserve access to UART1 as a serial connection in order to be able to update firmware on the node, or to recover the node by forced script removal or parameter reset.

ELECTRICAL CHARACTERISTICS

SM520 DC Characteristics (Operating)

Symbol	Parameter	Condition	Min	Typ	Max	Units
V_{CC}^1	Supply Voltage	-40 to 85°C	2.0	3.3	3.6	V

¹Absolute maximum stress rated voltage for V_{CC} is -0.3 to 3.6. It is recommended that bulk capacitance be located as close as possible to the V_{CC} pin on the host board. Ideally, use a single 47 μ F capacitor at 10V directly at the V_{CC} pin.

ADC Electrical Characteristics (Operating)

			Min	Typ	Max	Units
V_{REFH}^1	ADC Voltage Reference	Programmable	1.25		2.5	V
V_{INDC}	Analog input voltage	Single Ended	0		V_{REFH}	V

¹ V_{REFH} is programmable to two fixed values; 1.25V and 2.5V. The V_{REFH} value will be 1.25V or 2.5V depending on which channel is measured.

ADC Channel Pin Map

Channel	Pins ¹	Reference
0-7	PA0-PA7	2.5V
8-17	PB6-PB15	2.5V
18-29	PC0-PC11	2.5V
30-37	PD8-PD15	2.5V
38-53	PF0-PF15	2.5V
54-57	internal	2.5V
58-65	PA0-PA7	1.25V
66-75	PB6-PB15	1.25V
76-87	PC0-PC11	1.25V
88-95	PD8-PD15	1.25V
96-111	PF0-PF15	1.25V
112-115	internal	1.25V
116	Temperature	

¹Not all ADC pins have been brought out to the SM520 footprint.

MECHANICAL DRAWINGS

The drawings below show the modules with the compact F antenna and U.FL Connector options.

Note: The area under and around the module's antenna (marked KEEP OUT AREA and tinted red) should have no components and no copper on any layer of the printed circuit board. Additionally, leave enough clearance around the module for worst case component and processing variances.

For best performance, the module should be mounted on the outside edge of the circuit board with the antenna side as close to the edge of the board as possible.

Note: Metric measurements in millimeters are between brackets, with standard measurements in inches below.

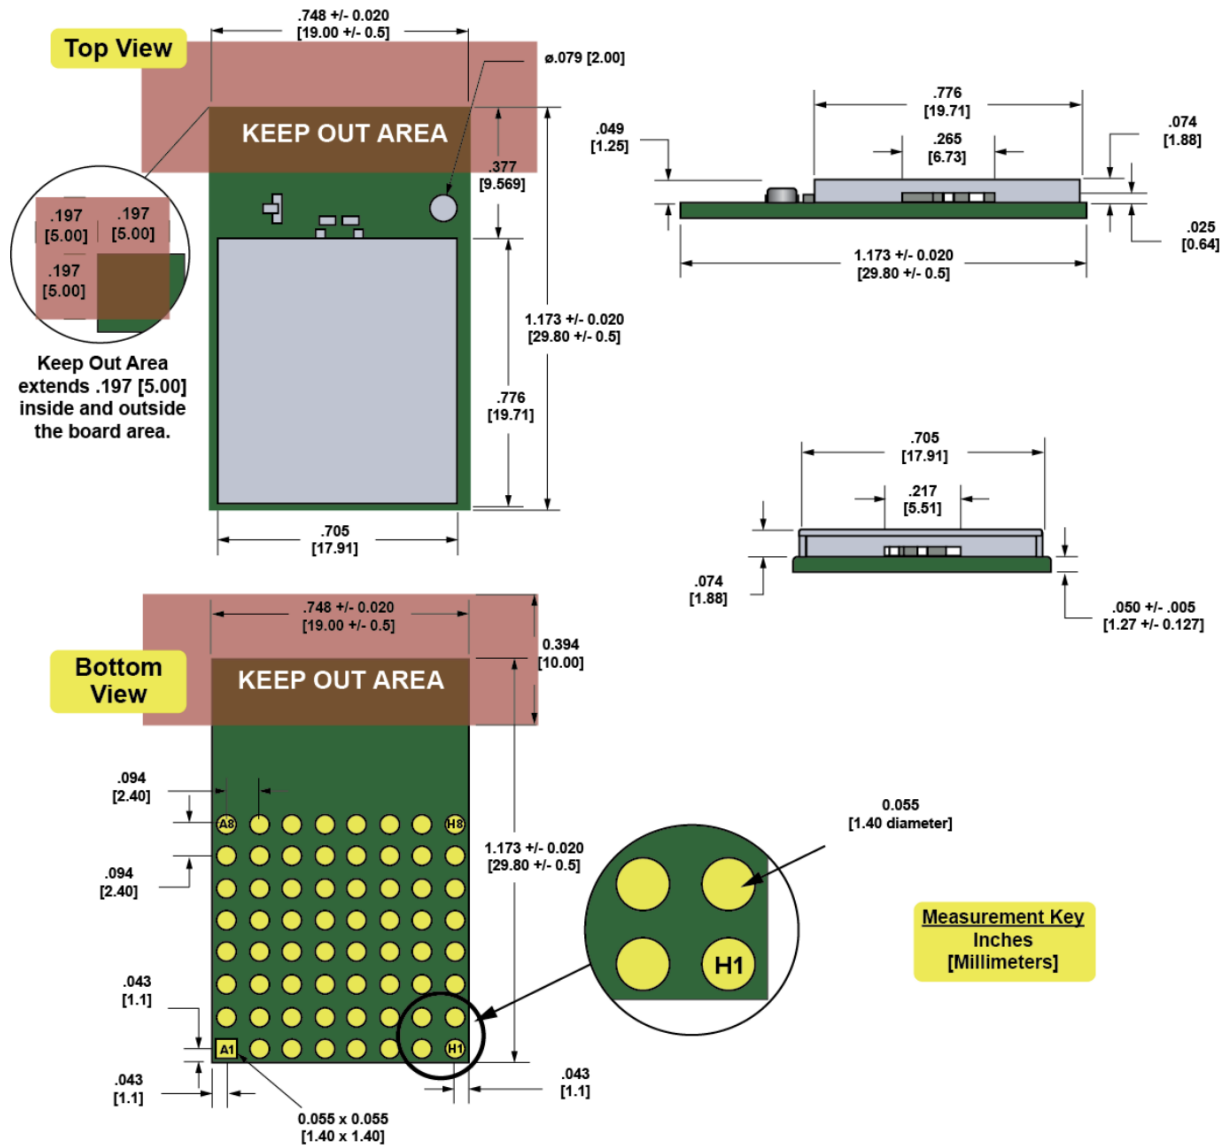


Fig. 1: SM520UF1 Mechanical Drawing

SM520UF1 Block Diagram

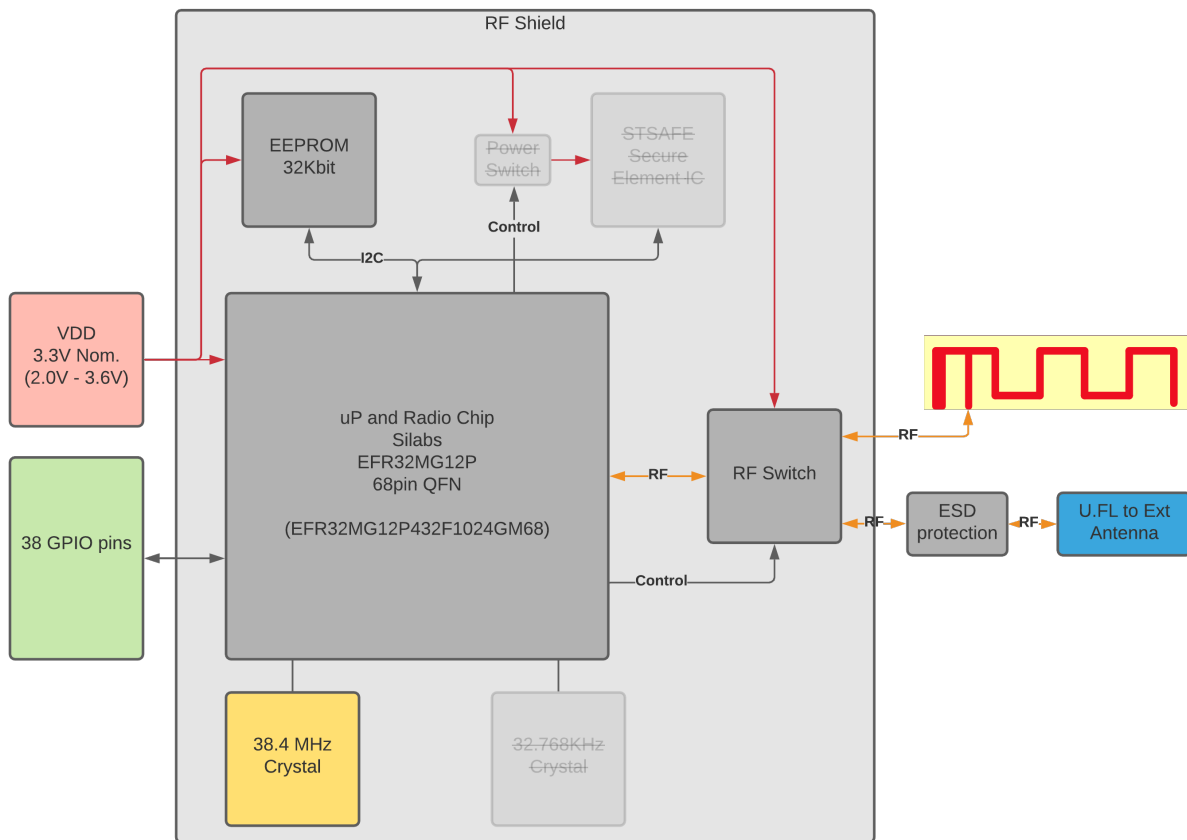


Fig. 2: Block diagram showing the major subsystems comprising Model SM520

ANTENNA GAIN PERFORMANCE

Note: Antenna gain performance information is based on information from the individual companies at the time this document's release. For added assurance, it's best to obtain antenna performance information directly from that antenna's manufacturer.

Internal Compact F antenna

Coming soon....Compact Internal F Antenna Gain Performance at 2440 MHz


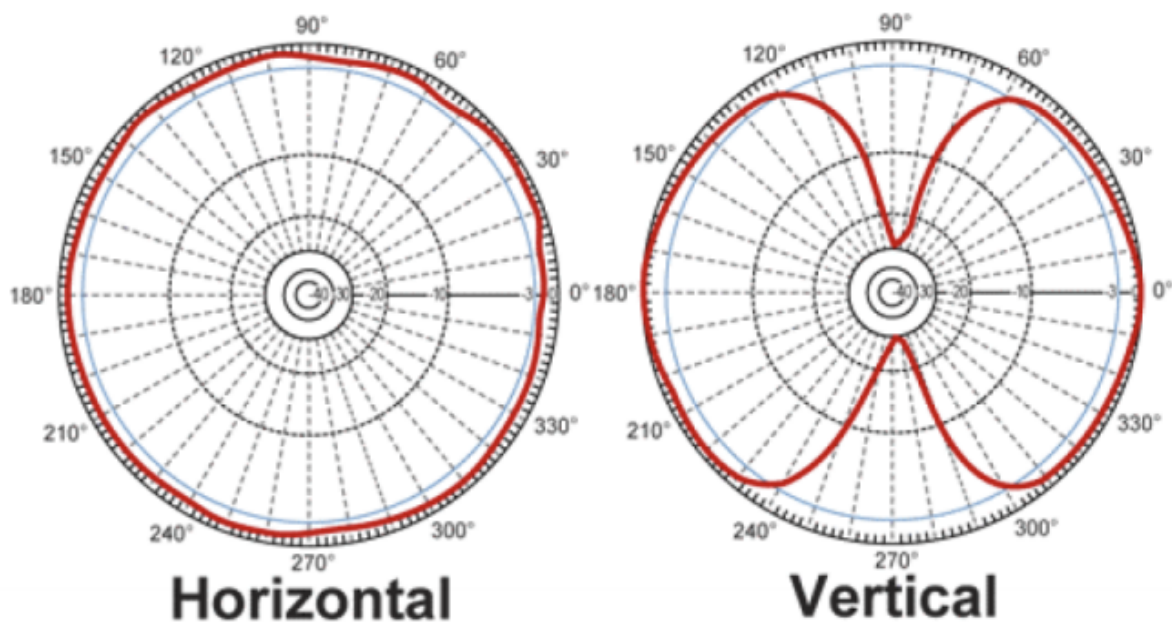


Fig. 1: HyperLink Technologies HG2405RD-RSP Antenna Gain Performance

Horizontal Position

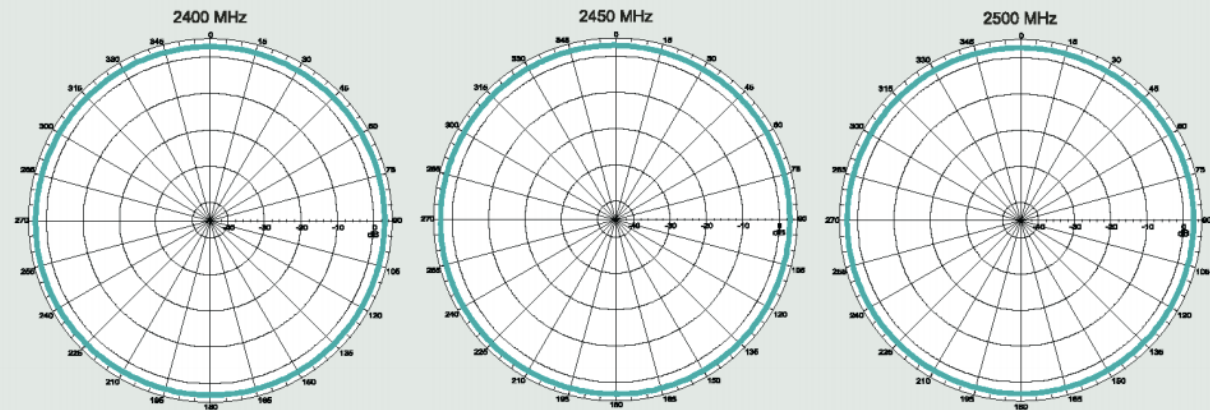

Vertical Position

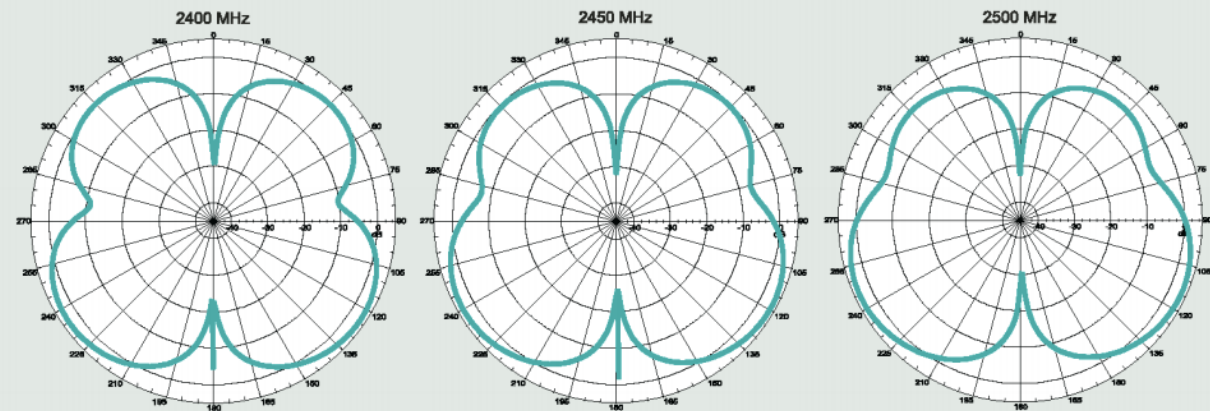


Fig. 2: Pulse W1027 Antenna Gain Performance

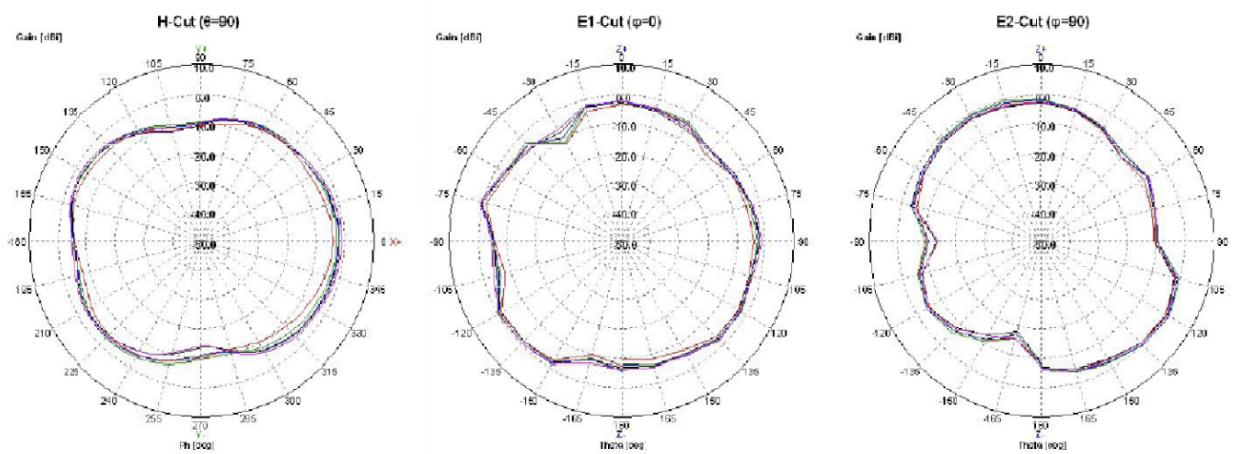


Fig. 3: ANT-2.4-CW-RAH-RPS Antenna Gain Performance

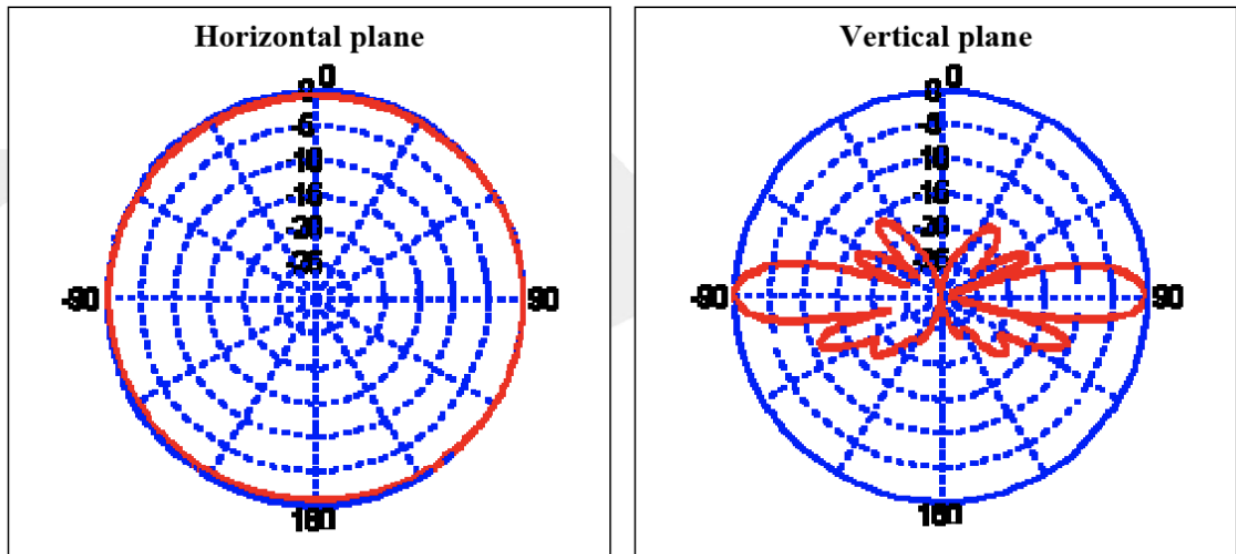


Fig. 4: ANT-OSC-8.0-1 Antenna Gain Performance

BOARD MOUNTING CONSIDERATIONS

6.1 Processing

Recommended Reflow Profile

Parameter	Value
Ramp up rate (from Tsoakmax to Tpeak)	3°/sec max
Minimum Soak Temperature	150°C
Maximum Soak Temperature	200°C
Soak Time	60-120 sec
TLiquidus	217°C
Time above TL	30-60 sec (recommended: 40 sec)
Tpeak	230° - 250°C (recommended: 235oC)
Time within 5° of Tpeak	20-30 sec
Time from 25° to Tpeak	8 min max
Ramp down rate	6°C/sec max


6.2 Pb-Free Soldering Paste

Use of “No Clean” soldering paste is strongly recommended, as it does not require cleaning after the soldering process.

6.3 Cleaning

In general, cleaning the populated modules is strongly discouraged. Residuals under the module cannot be easily removed with any cleaning process.

- Cleaning with water can lead to capillary effects where water is absorbed into the gap between the host board and the module. The combination of soldering flux residuals and encapsulated water could lead to short circuits between neighboring pads. Water could also damage any stickers or labels.
- Cleaning with alcohol or a similar organic solvent will likely flood soldering flux residuals into the two housings, which is not accessible for post-washing inspection. The solvent could also damage any stickers or labels.
- Ultrasonic cleaning could damage the module permanently.

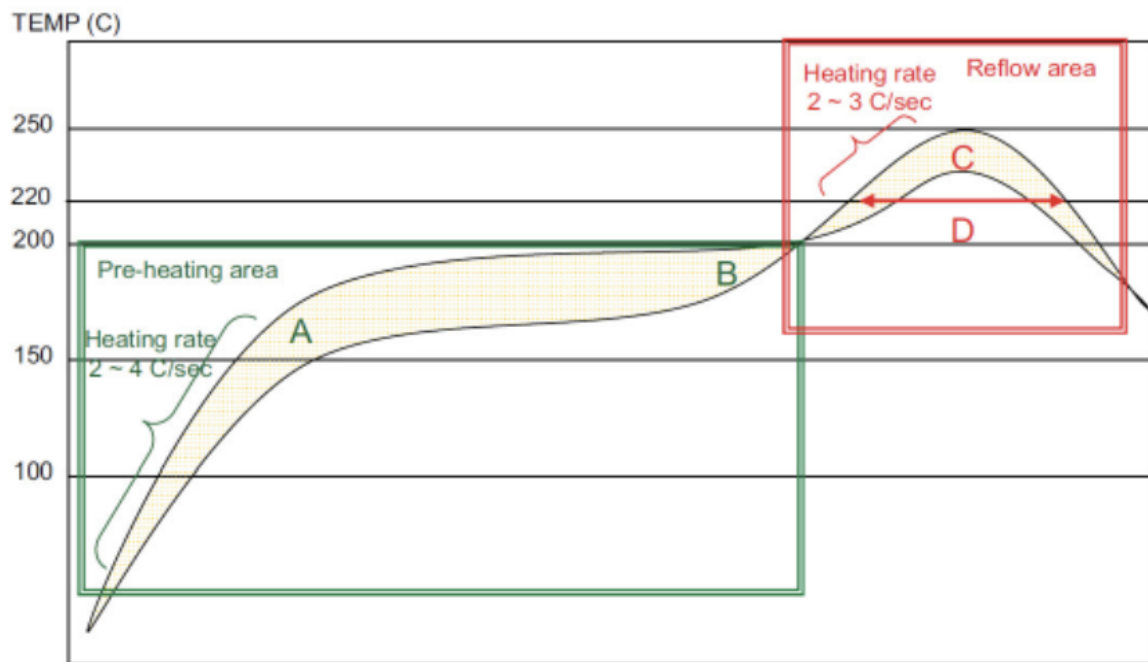

Recommendation Value at each point

A: soak start: 150~180°C
B: soak end: 170~200°C
A-B: soak time: 90±30sec

C: Peak temp.: 230~250°C
D: time above 220°C
(solidus line) 30~60sec

The recommended approach is to consider using a “no clean” soldering paste and eliminate the post-soldering cleaning step.

6.4 Repeating Reflow Soldering

Only a single reflow soldering process is encouraged for host boards.

6.5 Rework

The Model SM520 Module can be unsoldered from the host board, but the process is likely to damage the chip and not recommended. If attempting this, use of a hot air rework tool and hot plate for pre-heating from underneath is recommended. Avoid overheating.


Warning: Never attempt a rework on the module itself (e.g. replacing individual components). Such actions will terminate warranty coverage.

6.6 Additional Grounding

Attempts to improve module or system grounding by soldering braids, wires, or cables onto the module RF shield cover is done at the customer’s own risk. The numerous ground pins at the module perimeter should be sufficient for optimum immunity to external RF interference.

PACKAGING


Synapse SM series modules are available on plastic reels of carrier tape. The dimensions for those reels are provided below.

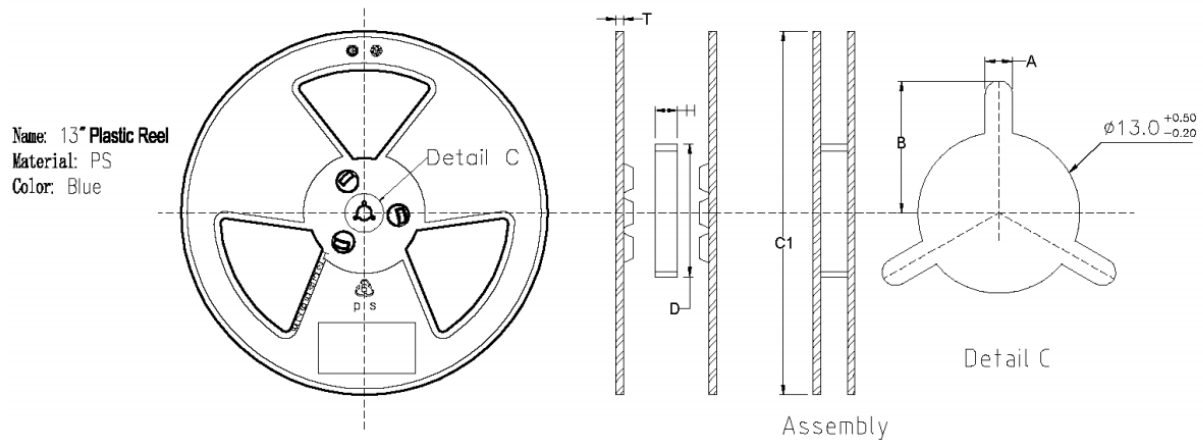

H $\pm$ 0.5	C1 $\pm$ 1.0	A $\pm$ 0.2	C $\pm$ 0.5 -0.2	T $\pm$ 0.3	B $\pm$ 0.2	D $\pm$ 2.0
44.5	$\phi 330$	2.2	13	2.2	10.75	99.5

All dimensions are in mm.

1. Sprocket hole pitch cumulative tolerance: ± 0.2 mm.
2. Carrier camber not to exceed 1mm in 250mm.
3. All dimensions meet EIA-481-C requirements.
4. Thickness: 0.35mm $\pm$ 0.05mm.
5. Packing length per reel: 12.6 meters.
6. Component load per reel: 500 pieces.

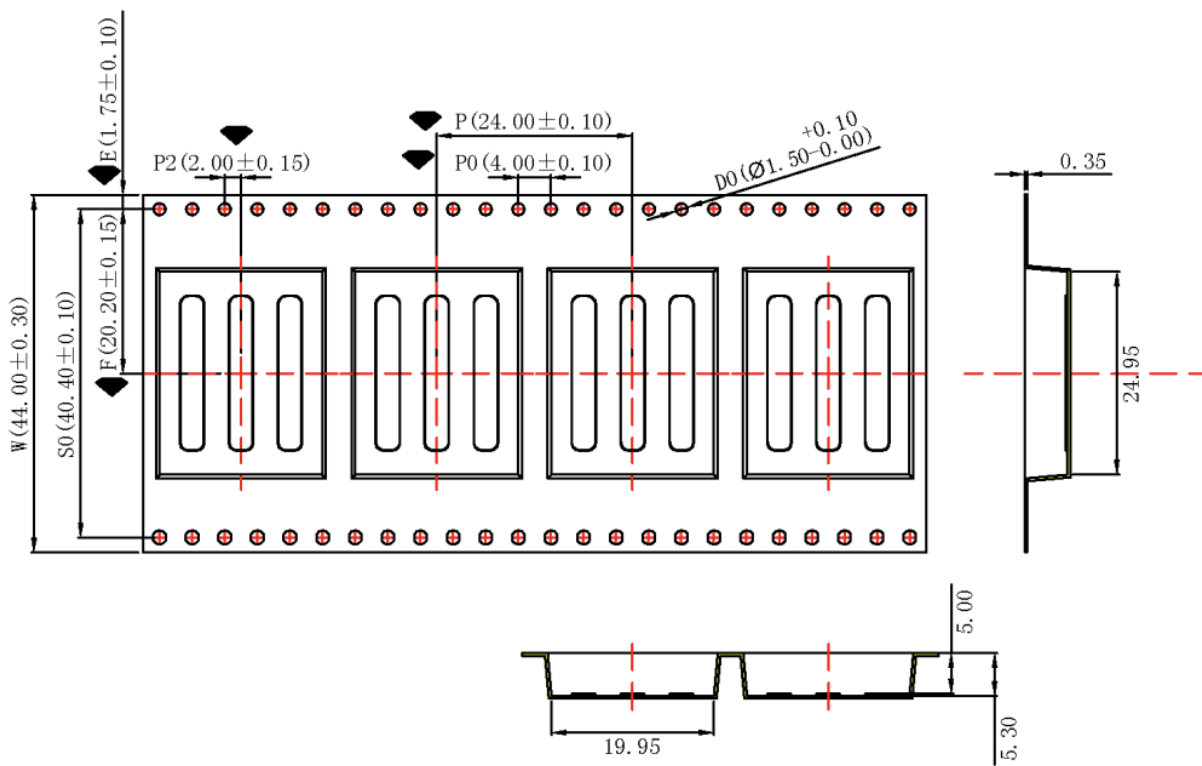

AGENCY CERTIFICATIONS

8.1 United States (FCC)

The Model SM520 modules comply with Part 15 of the FCC rules and regulations. Compliance with the labeling requirements, FCC notices, and antenna usage guidelines is required. In order to comply with FCC Certification requirements, the Original Equipment Manufacturer (OEM) must fulfill the following requirements.

1. The system integrator must place an exterior label on the outside of the final product housing the SM520 Modules. FCC Label below shows the contents that must be included on this label.
2. SM520 Modules may only be used with the antenna that has been tested and approved for use with the module. Please refer to the antenna table provided in this section.

8.2 OEM Labeling Requirements

Attention: The OEM must make sure that FCC labeling requirements are met. This includes a clearly visible exterior label on the outside of the final product housing that displays the contents shown in FCC Label below.

Note: FCC Example Label:

MANUFACTURERS NAME BRANDNAME or TRADENAME

Contains SM520 FCC ID: U90-SM520

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interferences and (2) this device must accept any interference received, including interference that may cause undesired operation.

8.3 FCC Notices

Warning: The SM520 modules have been tested by the FCC for use with other products without further certification (as per FCC Section 2.1091). Changes or modifications to this device not expressly approved by Synapse Wireless Inc. could void the user's authority to operate the equipment.

Attention: OEM's must certify final end product to comply with unintentional radiators (FCC Sections 15.107 and 15.109) before declaring compliance of their final product to Part 15 of the FCC Rules.

Attention: The SM520 modules have been certified for remote and base radio applications. If the module will be used for portable applications as defined by the FCC, the device must undergo SAR testing.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

8.4 FCC Approved Antennas

The SM520 modules are FCC-approved for fixed base station, mobile, and portable applications.

Attention: To reduce potential radio interference to other users, the antenna type and its gain should be chosen so that the equivalent isotropically radiated power (EIRP) is not more than that permitted for successful communication. This module has been designed to operate with the antennas listed in SM520 Approved FCC Antennas above. The required antenna impedance is 50 ohms.

SM520 Approved FCC Antennas

Part Number	Type	Gain	Application	Min. Separation
Compact F Antenna	PC Board Trace Antenna	-1.1 dBi	Fixed/Mobile	20 cm.

SM520 Approved FCC Antennas

Part Number	Type	Gain	Application	Min. Separation
Pulse W1027	Dipole (quarter-wave RPSMA)	3.2 dBi	Fixed/Mobile	20 cm.
HyperLink HG2405RD-RSP	Dipole (quarter-wave RPSMA)	5.5 dBi	Fixed/Mobile	20 cm.
ANT-OSC-8.0-1	CoLinear Dipole (RPSMA)	8 dBi	Fixed/Mobile	20 cm.
ANT-2.4-CW-RAH-RPS	Helical Whip (quarter-wave RPSMA)	1.6 dBi	Fixed/Mobile	20 cm.
ANT-2.4-CW-RH-RPS	Helical Whip (quarter-wave RPSMA)	-0.9 dBi	Fixed/Mobile	20 cm.

For more information on approved antennas, please consult the manufacturer's website.

Warning: RF Exposure: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Attention: The preceding statement must be included as a CAUTION statement in OEM product manuals in order to alert users of FCC RF exposure compliance.

Note: Antenna and transmitters may be co-located or operated in conjunction with this device only if the transmitters do not simultaneously transmit. Otherwise, additional regulatory requirements will apply.

8.5 Canada (IC)

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that necessary for successful communication.

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

This radio transmitter Model: SM520, IC: 7084A-SM520 has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio Model : SM520, IC : 7084A-SM520 a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

In order to comply with FCC/ISED RF Exposure requirements, this device must be installed to provide at least 20 cm separation from the human body at all times.

Afin de se conformer aux exigences d'exposition RF FCC / ISED, cet appareil doit être installé pour fournir au moins 20 cm de séparation du corps humain en tout temps.

SM520 Approved IC Antennas

Part Number	Type	Gain	Application	Min. Separation
Compact F Antenna	PC Board Trace Antenna	-1.1 dBi	Fixed/Mobile	20 cm.

SM520 Approved IC Antennas

Part Number	Type	Gain	Application	Min. Separation
Pulse W1027	Dipole (quarter-wave RPSMA)	3.2 dBi	Fixed/Mobile	20 cm.
HyperLink HG2405RD-RSP	Dipole (quarter-wave RPSMA)	5.5 dBi	Fixed/Mobile	20 cm.
ANT-OSC-8.0-1	Colinear Dipole (RPSMA)	8 dBi	Fixed/Mobile	20 cm.
ANT-2.4-CW-RAH-RPS	Helical Whip (quarter-wave RPSMA)	1.6 dBi	Fixed/Mobile	20 cm.
ANT-2.4-CW-RH-RPS	Helical Whip (quarter-wave RPSMA)	-0.9 dBi	Fixed/Mobile	20 cm.

8.6 IC OEM Labeling Requirements

Labeling requirements for Industry Canada are similar to those of the FCC. A clearly visible label on the outside of the final product housing must display the contents shown in IC Label below.

Note: IC Label Example:

MANUFACTURERS NAME BRANDNAME or TRADENAME

MODEL: <model number of OEM device>

Contains SM520 IC: 7084A-SM520

Note: The OEM can choose to implement a single label combined for both FCC and IC labeling requirements. If a combined single label is chosen, there must be a clearly visible label on the outside of the final product

housing displaying the contents shown in Combined FCC and IC Label below.

Note: Combined FCC and IC Label Example:

MANUFACTURERS NAME BRANDNAME or TRADENAME

Contains SM520 FCC ID: U90-SM520

Contains SM520 IC: 7084A-SM520

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interferences and (2) this device must accept any interference received, including interference that may cause undesired operation.
