

NORTHWEST EMC

Summit Semiconductor LLC

Athena 4XC

FCC 15.407:2016

802.11a SISO Radio Module

Report # FOCU0211



NVLAP Lab Code: 200630-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

CERTIFICATE OF TEST

Last Date of Test: May 09, 2016
Summit Semiconductor LLC
Model: Athena 4XC

Radio Equipment Testing

Standards

Specification	Method
FCC 15.407:2016	ANSI C63.10:2013, KDB 789033, KDB 905462


Results

Method Clause	Test Description	Applied	Results	Comments
6.2	AC – Powerline Conducted Emissions	No	N/A	Not required for permissive change
6.5, 6.6, 12.7	Spurious Radiated Emissions	Yes	Pass	
6.8	Frequency Stability	No	N/A	Not required for permissive change
12.2	Duty Cycle	Yes	Pass	
12.3.2.4	Maximum Conducted Output Power	Yes	Pass	
12.4.1	Emission Bandwidth	No	N/A	Not required for permissive change
12.4.2	Occupied Bandwidth	Yes	Pass	
12.4.2	Band Edge	Yes	Pass	
12.5	Maximum Power Spectral Density	Yes	Pass	
KDB 789033 -H	Measurement of Emission at Elevation Angle Higher Than 30 Degrees From Horizon	No	N/A	Not required unless the EUT is a Master device used outdoors

Deviations From Test Standards

None

Approved By:



Kyle Holgate, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number		Description	Date	Page Number
00		None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ($K=2$) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.



The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Industry Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

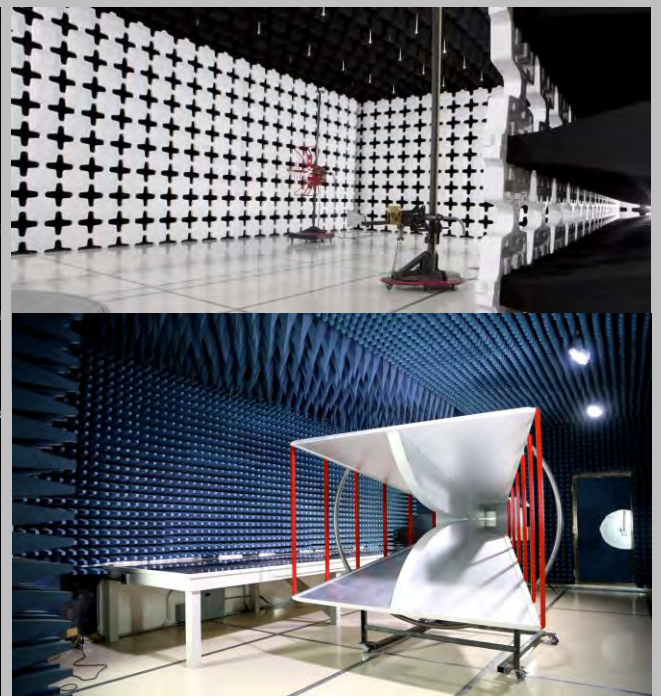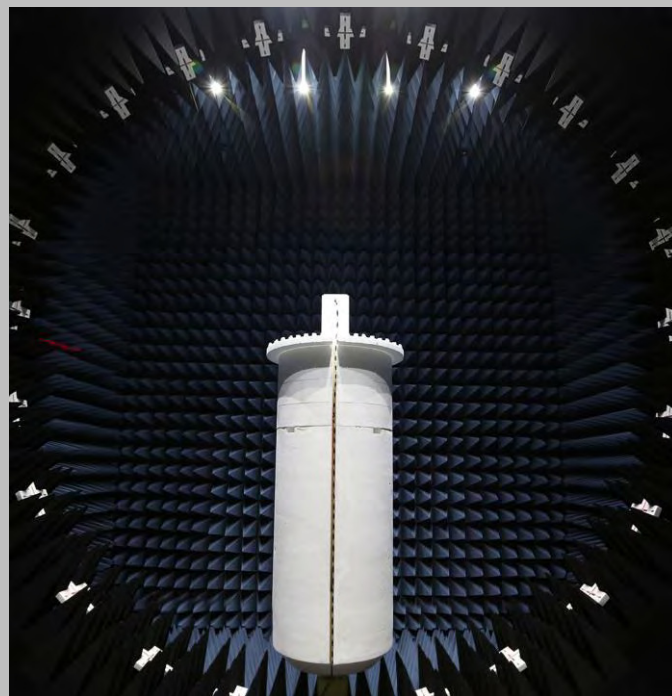

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Summit Semiconductor LLC
Address:	20575 NW Von Neumann Dr., Suite 100
City, State, Zip:	Beaverton, OR 97006
Test Requested By:	Kenneth Boehlke
Model:	Athena 4XC
First Date of Test:	May 05, 2016
Last Date of Test:	May 09, 2016
Receipt Date of Samples:	May 05, 2016
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Digital wireless audio device operating in the UNII bands as a client device. Radio module with 4 identical SISO ports.
Testing Objective:
To demonstrate compliance of the 802.11a radio under FCC 15.407 for operation in the 5.8 GHz band.

CONFIGURATIONS

Configuration FOCU0211- 2

Software/Firmware Running during test					
Description			Version		
Oly Dbg			30		
EUT					
Description	Manufacturer	Model/Part Number	Serial Number		
Athena 4XC	Summit Semiconductor LLC	444-2250	02EA3100AB5B		
Peripherals in test setup boundary					
Description	Manufacturer	Model/Part Number	Serial Number		
Power Supply	CONDOR	STD-1836P	None		
Power Bridge	Summit Semiconductor LLC	Shanako Amp	0104R101		
Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Power	No	1.6m	Yes	Power bridge	Power Supply
AC Power	No	.8m	No	Power Supply	AC Mains
UART Leads	No	.2m	No	Power bridge	Unterminated

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	5/5/2016	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	5/5/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	5/5/2016	Maximum Conducted Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	5/5/2016	Maximum Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	5/5/2016	Band Edge	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	5/9/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Please reference comments for EUT orientation and operating mode.

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

FOCU0211 - 2

FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 40000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Attenuator	S.M. Electronics	SA18N-06/SM4032	REE	10/1/2015	12
Meter - Power	Gigatronics	8651A	SPM	5/25/2015	12
Power Sensor	Gigatronics	80701A	SPL	5/25/2015	12
Generator - Signal	Keysight	N5182B	TFU	NCR	0
Cable	ESM Cable Corp.	TTBJ-141-KMKM-72	EV3	6/24/2015	12
Antenna - Double Ridge	ETS Lindgren	3115	AIZ	2/3/2016	24
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	4/22/2016	12
Cable	ESM Cable Corp.	KMKM-72	EVE	6/6/2015	12
Amplifier - Pre-Amplifier	Miteq	JSW45-26004000-40-5P	PAE	6/6/2015	12
Antenna - Standard Gain	ETS Lindgren	3160-10	AIW	NCR	0
Cable	ESM Cable Corp.	KMKM-72	EVY	11/4/2015	12
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	11/4/2015	12
Antenna - Standard Gain	ETS Lindgren	3160-09	AIV	NCR	0
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	3/11/2016	12
Antenna - Standard Gain	ETS Lindgren	3160-08	AHV	NCR	0
Cable	None	Standard Gain Horns Cable	EVF	3/11/2016	12
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVC	3/11/2016	12
Antenna - Standard Gain	ETS Lindgren	3160-07	AHU	NCR	0
Cable	N/A	Double Ridge Horn Cables	EVB	3/11/2016	12
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAG	3/11/2016	12
Antenna - Double Ridge	EMCO	3115	AHC	6/13/2014	24
Cable	N/A	Bilog Cables	EVA	3/11/2016	12
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AOL	3/11/2016	12
Antenna - Biconilog	EMCO	3141	AXE	8/29/2014	24


TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT were tested. The EUT was configured for the lowest, a middle, and the highest transmit frequency in each operational band. For each configuration, the spectrum was scanned throughout the specified range. Measurements were made to satisfy the three requirements of 47 CFR 15.407: Field strength under 1GHz, Restricted Bands of 47 CFR 15.205, and EIRP of 47 CFR 15.407.

While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10:2009). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Work Order:	FOCU0211	Date:	05/06/16	<i>Rod Peloquin</i>
Project:	None	Temperature:		
Job Site:	EV01	Humidity:		
Serial Number:	02EA3100AB5B	Barometric Pres.:		
EUT:	Athena 4XC	Tested by:	Rod Peloquin, Luke Richardson	
Configuration:	2			
Customer:	Summit Semiconductor LLC			
Attendees:	Dave Schilling			
EUT Power:	110VAC/60Hz			
Operating Mode:	Please reference comments for EUT orientation and operating mode.			
Deviations:	None			
Comments:	None			

Test Specifications				Test Method			
FCC 15.407:2016				ANSI C63.10:2013			
Run #	9	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass

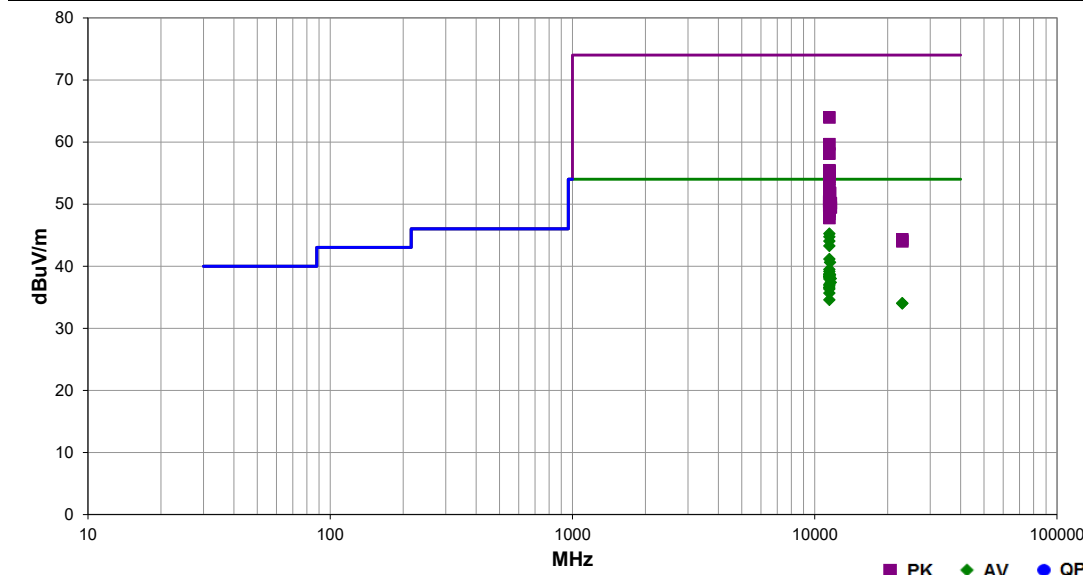


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
11488.640	44.8	0.4	1.9	295.0	3.0	0.0	Horz	AV	0.0	45.2	54.0	-8.8	Low Channel, EUT Horizontal, 18 Mbps, Ant. 2
11488.480	44.3	0.4	1.9	299.0	3.0	0.0	Horz	AV	0.0	44.7	54.0	-9.3	Low Channel, EUT Horizontal, 6 Mbps, Ant. 2
11488.630	43.6	0.4	1.9	233.0	3.0	0.0	Horz	AV	0.0	44.0	54.0	-10.0	Low Channel, EUT Horizontal, 18 Mbps, Ant. 1
11490.200	63.5	0.4	1.9	232.0	3.0	0.0	Horz	PK	0.0	63.9	74.0	-10.1	Low Channel, EUT Horizontal, 6Mbps, Ant. 1
11491.070	42.8	0.5	1.9	232.0	3.0	0.0	Horz	AV	0.0	43.3	54.0	-10.7	Low Channel, EUT Horizontal, 6Mbps, Ant. 1
11488.480	40.7	0.4	1.9	317.0	3.0	0.0	Horz	AV	0.0	41.1	54.0	-12.9	Low Channel, EUT On Side, 6 Mbps, Ant. 2
11568.580	39.4	1.2	2.5	99.0	3.0	0.0	Horz	AV	0.0	40.6	54.0	-13.4	Mid Channel, EUT Horizontal, 6 Mbps, Ant. 2
11490.450	59.2	0.4	1.0	183.0	3.0	0.0	Vert	PK	0.0	59.6	74.0	-14.4	Low Channel, EUT On Side, 6Mbps, Ant. 1
11490.950	39.0	0.5	1.0	183.0	3.0	0.0	Vert	AV	0.0	39.5	54.0	-14.5	Low Channel, EUT On Side, 6Mbps, Ant. 1
11488.530	38.7	0.4	2.0	315.0	3.0	0.0	Horz	AV	0.0	39.1	54.0	-14.9	Low Channel, EUT Vertical, 6 Mbps, Ant. 2
11488.540	38.3	0.4	1.2	199.0	3.0	0.0	Vert	AV	0.0	38.7	54.0	-15.3	Low Channel, EUT Vertical, 6 Mbps, Ant. 2
11490.900	38.2	0.5	3.1	326.0	3.0	0.0	Vert	AV	0.0	38.7	54.0	-15.3	Low Channel, EUT Vertical, 6Mbps, Ant. 1
11568.520	37.4	1.2	1.0	201.0	3.0	0.0	Vert	AV	0.0	38.6	54.0	-15.4	Mid Channel, EUT Vertical, 6 Mbps, Ant. 2
11491.130	38.1	0.5	1.0	54.0	3.0	0.0	Horz	AV	0.0	38.6	54.0	-15.4	Low Channel, EUT Horizontal, 6 Mbps, Ant. 4
11488.600	37.9	0.4	2.6	213.0	3.0	0.0	Horz	AV	0.0	38.3	54.0	-15.7	Low Channel, EUT Horizontal, 18 Mbps, Ant. 3
11486.630	37.9	0.4	1.1	162.0	3.0	0.0	Horz	AV	0.0	38.3	54.0	-15.7	Low Channel, EUT Horizontal, 6 Mbps, Ant. 3
11491.030	37.7	0.5	2.2	327.0	3.0	0.0	Horz	AV	0.0	38.2	54.0	-15.8	Low Channel, EUT Vertical, 6Mbps, Ant. 1
11490.470	57.7	0.4	3.1	326.0	3.0	0.0	Vert	PK	0.0	58.1	74.0	-15.9	Low Channel, EUT Vertical, 6Mbps, Ant. 1
11648.480	36.0	2.0	2.1	91.0	3.0	0.0	Horz	AV	0.0	38.0	54.0	-16.0	High Channel, EUT Horizontal, 6 Mbps, Ant. 2
11488.520	37.5	0.4	2.7	336.0	3.0	0.0	Vert	AV	0.0	37.9	54.0	-16.1	Low Channel, EUT Vertical, 6 Mbps, Ant. 4
11648.500	35.4	2.0	1.0	204.0	3.0	0.0	Vert	AV	0.0	37.4	54.0	-16.6	High Channel, EUT Vertical, 6 Mbps, Ant. 2
11488.720	36.6	0.4	2.0	100.0	3.0	0.0	Horz	AV	0.0	37.0	54.0	-17.0	Low Channel, EUT Horizontal, 18 Mbps, Ant. 4
11488.490	36.4	0.4	1.2	335.0	3.0	0.0	Vert	AV	0.0	36.8	54.0	-17.2	Low Channel, EUT On Side, 6 Mbps, Ant. 2
11486.470	36.1	0.4	2.1	276.0	3.0	0.0	Vert	AV	0.0	36.5	54.0	-17.5	Low Channel, EUT Vertical, 6 Mbps, Ant. 3
11488.480	35.9	0.4	1.0	137.0	3.0	0.0	Vert	AV	0.0	36.3	54.0	-17.7	Low Channel, EUT Horizontal, 6 Mbps, Ant. 2
11491.050	35.2	0.5	3.4	359.0	3.0	0.0	Vert	AV	0.0	35.7	54.0	-18.3	Low Channel, EUT Horizontal, 6Mbps, Ant. 1
11490.080	55.0	0.4	1.1	207.0	3.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	Low Channel, EUT On Side, 6Mbps, Ant. 1
11488.610	54.9	0.4	1.9	295.0	3.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7	Low Channel, EUT Horizontal, 18 Mbps, Ant. 2
11490.970	54.8	0.5	1.9	299.0	3.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7	Low Channel, EUT Horizontal, 6 Mbps, Ant. 2
11490.920	34.1	0.5	1.1	207.0	3.0	0.0	Horz	AV	0.0	34.6	54.0	-19.4	Low Channel, EUT On Side, 6Mbps, Ant. 1
11490.620	53.9	0.4	2.2	327.0	3.0	0.0	Horz	PK	0.0	54.3	74.0	-19.7	Low Channel, EUT Horizontal, 6Mbps, Ant. 1
11488.710	53.6	0.4	1.9	233.0	3.0	0.0	Horz	PK	0.0	54.0	74.0	-20.0	Low Channel, EUT Horizontal, 18 Mbps, Ant. 1

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
22979.880	34.0	0.0	1.8	55.0	3.0	0.0	Horz	AV	0.0	34.0	54.0	-20.0	EUT Horizontal, Low Channel, 6 Mbps, Ant. 2
22979.870	34.0	0.0	1.9	138.0	3.0	0.0	Vert	AV	0.0	34.0	54.0	-20.0	EUT Vertical, Low Channel, 6 Mbps, Ant. 2
11488.700	51.9	0.4	2.6	213.0	3.0	0.0	Horz	PK	0.0	52.3	74.0	-21.7	Low Channel, EUT Horizontal, 18 Mbps, Ant. 3
11490.530	51.4	0.4	1.9	317.0	3.0	0.0	Horz	PK	0.0	51.8	74.0	-22.2	Low Channel, EUT On Side, 6 Mbps, Ant. 2
11566.500	50.6	1.2	2.5	99.0	3.0	0.0	Horz	PK	0.0	51.8	74.0	-22.2	Mid Channel, EUT Horizontal, 6 Mbps, Ant. 2
11490.580	50.1	0.4	1.1	162.0	3.0	0.0	Horz	PK	0.0	50.5	74.0	-23.5	Low Channel, EUT Horizontal, 6 Mbps, Ant. 3
11487.250	50.1	0.4	1.0	54.0	3.0	0.0	Horz	PK	0.0	50.5	74.0	-23.5	Low Channel, EUT Horizontal, 6 Mbps, Ant. 4
11487.100	49.9	0.4	2.1	276.0	3.0	0.0	Vert	PK	0.0	50.3	74.0	-23.7	Low Channel, EUT Vertical, 6 Mbps, Ant. 3
11646.280	48.2	2.0	2.1	91.0	3.0	0.0	Horz	PK	0.0	50.2	74.0	-23.8	High Channel, EUT Horizontal, 6 Mbps, Ant. 2
11566.430	48.9	1.2	1.0	201.0	3.0	0.0	Vert	PK	0.0	50.1	74.0	-23.9	Mid Channel, EUT Vertical, 6 Mbps, Ant. 2
11490.550	49.5	0.4	2.0	315.0	3.0	0.0	Horz	PK	0.0	49.9	74.0	-24.1	Low Channel, EUT Vertical, 6 Mbps, Ant. 2
11490.480	49.3	0.4	1.2	199.0	3.0	0.0	Vert	PK	0.0	49.7	74.0	-24.3	Low Channel, EUT Vertical, 6 Mbps, Ant. 2
11486.650	49.3	0.4	2.7	336.0	3.0	0.0	Vert	PK	0.0	49.7	74.0	-24.3	Low Channel, EUT Vertical, 6 Mbps, Ant. 4
11646.400	47.5	2.0	1.0	204.0	3.0	0.0	Vert	PK	0.0	49.5	74.0	-24.5	High Channel, EUT Vertical, 6 Mbps, Ant. 2
11488.580	48.5	0.4	2.0	100.0	3.0	0.0	Horz	PK	0.0	48.9	74.0	-25.1	Low Channel, EUT Horizontal, 18 Mbps, Ant. 4
11490.080	48.4	0.4	3.4	359.0	3.0	0.0	Vert	PK	0.0	48.8	74.0	-25.2	Low Channel, EUT Horizontal, 6Mbps, Ant.1
11488.430	48.0	0.4	1.2	335.0	3.0	0.0	Vert	PK	0.0	48.4	74.0	-25.6	Low Channel, EUT On Side, 6 Mbps, Ant. 2
11490.390	47.3	0.4	1.0	137.0	3.0	0.0	Vert	PK	0.0	47.7	74.0	-26.3	Low Channel, EUT Horizontal, 6 Mbps, Ant. 2
22981.180	44.3	0.0	1.8	55.0	3.0	0.0	Horz	PK	0.0	44.3	74.0	-29.7	EUT Horizontal, Low Channel, 6 Mbps, Ant. 2
22978.630	44.0	0.0	1.9	138.0	3.0	0.0	Vert	PK	0.0	44.0	74.0	-30.0	EUT Vertical, Low Channel, 6 Mbps, Ant. 2

Work Order:	FOCU0211	Date:	05/06/16	
Project:	None	Temperature:	22 °C	
Job Site:	EV01	Humidity:	44.5% RH	
Serial Number:	02EA3100AB5B	Barometric Pres.:	1019 mbar	
EUT:		Athena 4XC		
Configuration:		2		
Customer:		Summit Semiconductor LLC		
Attendees:		Dave Schilling		
EUT Power:		110VAC/60Hz		
Operating Mode:		Please reference comments for EUT orientation and operating mode.		
Deviations:		None		
Comments:		None		

Test Specifications	Test Method
FCC 15.407:2016	ANSI C63.10:2013

Run #	19	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

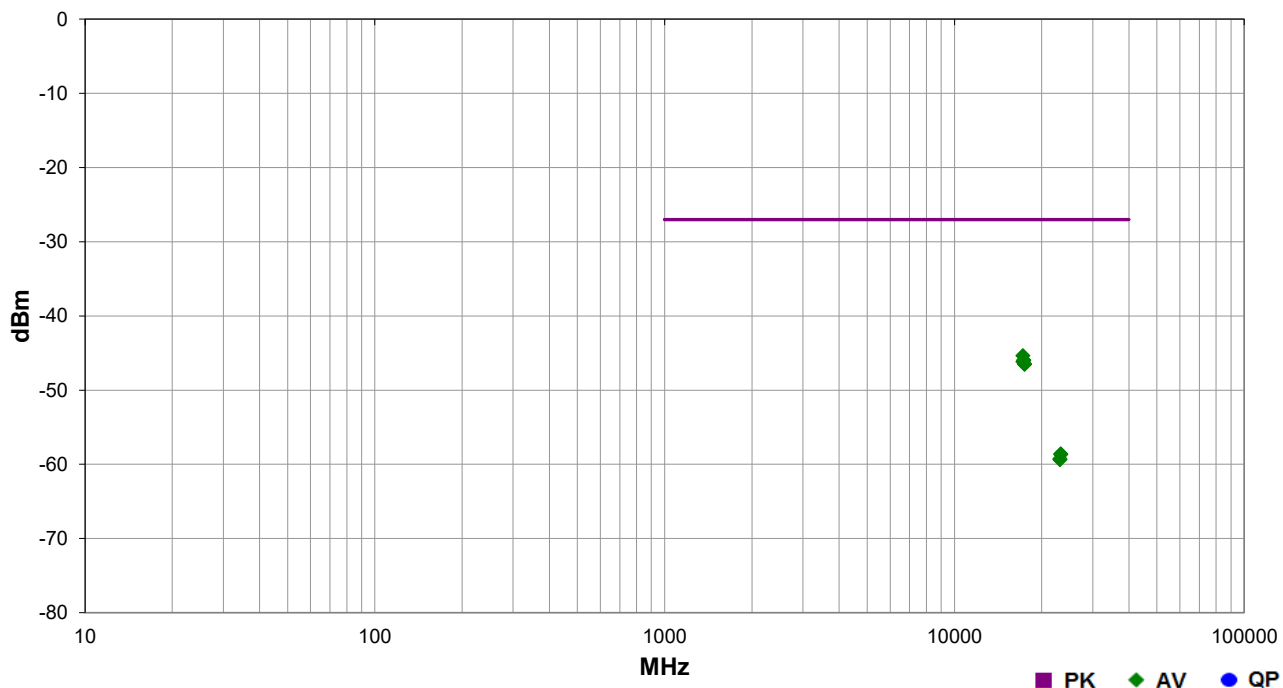


	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/ Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
	17234.950	2.2	185.0	Horz	AV	2.90E-08	-45.4	-27.0	-18.4	Low Channel, EUT Horizontal, 6 Mbps, Ant. 2
	17353.480	1.0	32.0	Vert	AV	2.54E-08	-46.0	-27.0	-19.0	Mid Channel, EUT Horizontal, 6 Mbps, Ant. 2
	17353.640	1.0	42.0	Horz	AV	2.48E-08	-46.0	-27.0	-19.0	Mid Channel, EUT Vertical, 6 Mbps, Ant. 2
	17234.960	1.0	96.0	Vert	AV	2.42E-08	-46.2	-27.0	-19.2	Low Channel, EUT Vertical, 6 Mbps, Ant. 2
	17475.490	1.6	105.0	Vert	AV	2.23E-08	-46.5	-27.0	-19.5	High Channel, EUT Vertical, 6 Mbps, Ant. 2
	17472.770	1.0	7.0	Horz	AV	2.23E-08	-46.5	-27.0	-19.5	High Channel, EUT Horizontal, 6 Mbps, Ant. 2
	23300.190	1.8	218.0	Vert	AV	1.38E-09	-58.6	-27.0	-31.6	EUT Vertical, High Channel, 6 Mbps, Ant. 2
	23301.180	1.8	200.0	Horz	AV	1.35E-09	-58.7	-27.0	-31.7	EUT Horizontal, High Channel, 6 Mbps, Ant. 2
	23138.580	1.9	96.0	Horz	AV	1.18E-09	-59.3	-27.0	-32.3	EUT Horizontal, Mid Channel, 6 Mbps, Ant. 2
	23140.730	1.8	17.0	Vert	AV	1.16E-09	-59.4	-27.0	-32.4	EUT Vertical, Mid Channel, 6 Mbps, Ant. 2

Work Order:	FOCU0211	Date:	05/09/16	<i>Rod Peloquin</i>
Project:	None	Temperature:		
Job Site:	EV01	Humidity:		
Serial Number:	02EA3100AB5B	Barometric Pres.:		
EUT:	Athena 4XC			Tested by: Rod Peloquin, Luke Richardson
Configuration:	2			
Customer:	Summit Semiconductor LLC			
Attendees:	Dave Schilling			
EUT Power:	110VAC/60Hz			
Operating Mode:	Please see comments section of data			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.407:2016	ANSI C63.10:2013

Run #	31	Test Distance (m)	1	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

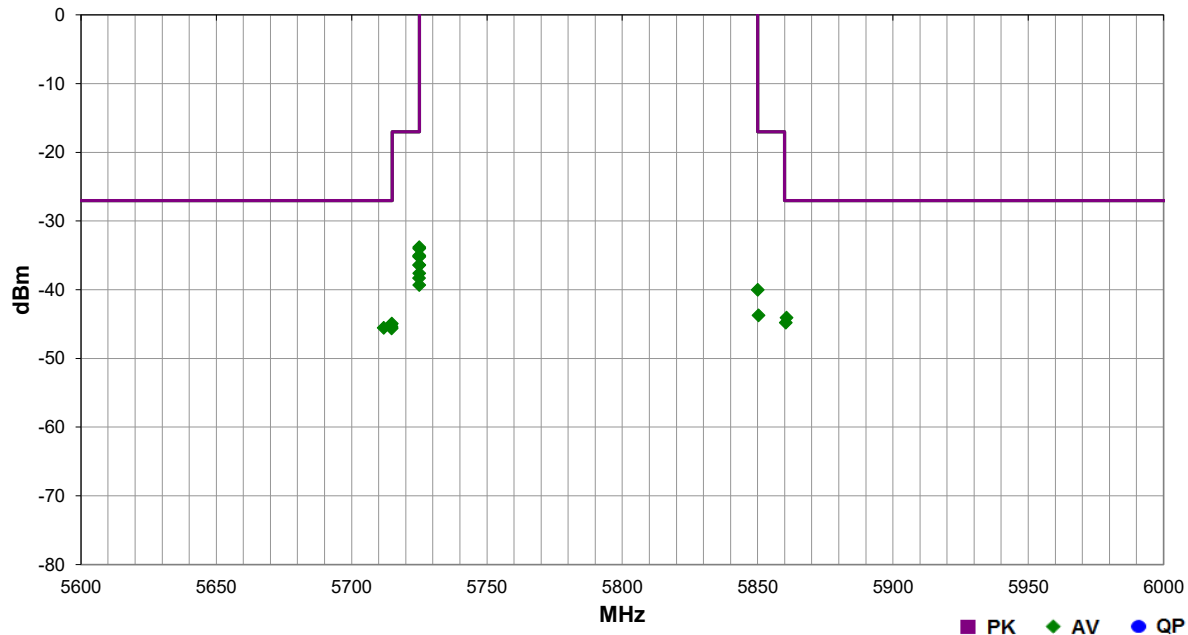

Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/ Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
5725.000	1.5	277.0	Horz	AV	4.15E-07	-33.8	-17.0	-16.8	EUT Horizontal, Low Channel, 6 Mbps, Ant. 2
5724.993	1.5	159.0	Vert	AV	3.96E-07	-34.0	-17.0	-17.0	EUT Vertical, Low Channel, 6 Mbps, Ant. 2
5860.740	1.6	63.0	Horz	AV	3.90E-08	-44.1	-27.0	-17.1	EUT Horizontal, Low Channel, 6 Mbps, Ant. 2
5860.467	1.7	188.0	Vert	AV	3.32E-08	-44.8	-27.0	-17.8	EUT Vertical, Low Channel, 6 Mbps, Ant. 2
5714.867	1.5	344.0	Horz	AV	3.20E-08	-44.9	-27.0	-17.9	EUT Horizontal, Low Channel, 6 Mbps, Ant. 1
5725.000	1.7	239.0	Horz	AV	3.15E-07	-35.0	-17.0	-18.0	EUT Horizontal, Low Channel, 6 Mbps, Ant. 3
5724.980	1.6	141.0	Vert	AV	3.07E-07	-35.1	-17.0	-18.1	EUT Vertical, Low Channel, 6 Mbps, Ant. 4
5714.573	1.5	169.0	Vert	AV	3.06E-08	-45.1	-27.0	-18.1	EUT Vertical, Low Channel, 6 Mbps, Ant. 2
5724.993	1.8	31.0	Vert	AV	3.00E-07	-35.2	-17.0	-18.2	EUT Vertical, Low Channel, 6 Mbps, Ant. 3
5714.807	1.6	184.0	Vert	AV	2.86E-08	-45.4	-27.0	-18.4	EUT Vertical, Low Channel, 18 Mbps, Ant. 2
5711.860	1.6	22.0	Horz	AV	2.79E-08	-45.5	-27.0	-18.5	EUT Horizontal, Low Channel, 6 Mbps, Ant. 2
5714.773	1.6	22.0	Horz	AV	2.73E-08	-45.6	-27.0	-18.6	EUT Horizontal, Low Channel, 18 Mbps, Ant. 2
5725.000	1.6	343.0	Horz	AV	2.28E-07	-36.4	-17.0	-19.4	EUT Horizontal, Low Channel, 6 Mbps, Ant. 1
5724.980	1.8	119.0	Vert	AV	2.28E-07	-36.4	-17.0	-19.4	EUT Vertical, Low Channel, 6 Mbps, Ant. 1
5725.000	1.5	104.0	Horz	AV	1.73E-07	-37.6	-17.0	-20.6	EUT Horizontal, Low Channel, 6 Mbps, Ant. 4
5724.953	1.6	56.0	Vert	AV	1.47E-07	-38.3	-17.0	-21.3	EUT Vertical, Low Channel, 18 Mbps, Ant. 2
5724.980	1.6	61.0	Horz	AV	1.17E-07	-39.3	-17.0	-22.3	EUT Horizontal, Low Channel, 18 Mbps, Ant. 2
5850.060	1.6	57.0	Horz	AV	9.92E-08	-40.0	-17.0	-23.0	EUT Horizontal, Low Channel, 6 Mbps, Ant. 2
5850.380	1.6	164.0	Vert	AV	4.23E-08	-43.7	-17.0	-26.7	EUT Vertical, Low Channel, 6 Mbps, Ant. 2

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Generator - Signal	Keysight	N5182B	TFU	NCR	0
Cable	ESM Cable Corp.	TT	EV1	NCR	0
Block - DC	Pasternack	PE8210	AME	10/1/2015	12
Attenuator	S.M. Electronics	SA26B-20	AWT	NCR	0
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2/13/2016	12

TEST DESCRIPTION

Per ANSI C63.10, all measurements are to be performed with the EUT operating at 100% duty cycle at its maximum power level. In the event the EUT cannot be operated at 100% duty cycle, the transmission pulse duration (T) and Duty Cycle (x) are required to be measured for each of the EUT operating modes.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, a duty cycle correction factor in dB can be calculated to add to power measurements if required in the test method guidance using the following formula

$$10 * \text{LOG} (1/D) = \text{dB}$$


Where D is duty cycle of the radio transmissions

**NORTHWEST
EMC**


EUT:	Athena 4XC	Work Order:	FOCU0211			
Serial Number:	02EA3100ACAE	Date:	05/05/16			
Customer:	Summit Semiconductor LLC	Temperature:	23.9°C			
Attendees:	Dave Schilling	Humidity:	40%			
Project:	C2PC	Barometric Pres.:	1015.8			
Tested by:	Jeff Alcock and Rod Peloquin	Power:	5.0 VDC			
		Job Site:	EV06			
TEST SPECIFICATIONS		Test Method				
FCC 15.407:2016	ANSI C63.10:2013					
COMMENTS						
Testing performed on Antenna Port 1 - U.FL						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature 				
	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
5725 - 5785 MHz Band						
Low Channel, Ch 149 - 5745 MHz						
802.11(a) 6 Mbps	200.483 us	287.1 us	1	69.8	N/A	N/A
802.11(a) 6 Mbps	N/A	N/A	5	N/A	N/A	N/A
802.11(a) 18 Mbps	88.383 us	175.3 us	1	50.4	N/A	N/A
802.11(a) 18 Mbps	N/A	N/A	5	N/A	N/A	N/A
802.11(a) 36 Mbps	60.594 us	147.3 us	1	41.1	N/A	N/A
802.11(a) 36 Mbps	N/A	N/A	5	N/A	N/A	N/A
Mid Channel, Ch 157 - 5785 MHz						
802.11(a) 6 Mbps	200.438 us	287.1 us	1	69.8	N/A	N/A
802.11(a) 6 Mbps	N/A	N/A	5	N/A	N/A	N/A
802.11(a) 18 Mbps	88.683 us	175.356 us	1	50.6	N/A	N/A
802.11(a) 18 Mbps	N/A	N/A	5	N/A	N/A	N/A
802.11(a) 36 Mbps	60.538 us	147.3 us	1	41.1	N/A	N/A
802.11(a) 36 Mbps	N/A	N/A	5	N/A	N/A	N/A
High Channel, Ch 165 - 5825 MHz						
802.11(a) 6 Mbps	200.438 us	297.1 us	1	67.5	N/A	N/A
802.11(a) 6 Mbps	N/A	N/A	6	N/A	N/A	N/A
802.11(a) 18 Mbps	88.627 us	175.3 us	1	50.6	N/A	N/A
802.11(a) 18 Mbps	N/A	N/A	5	N/A	N/A	N/A
802.11(a) 36 Mbps	60.783 us	147.256 us	1	41.3	N/A	N/A
802.11(a) 36 Mbps	N/A	N/A	5	N/A	N/A	N/A

DUTY CYCLE

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
200.483 us	287.1 us	1	69.8	N/A	N/A	

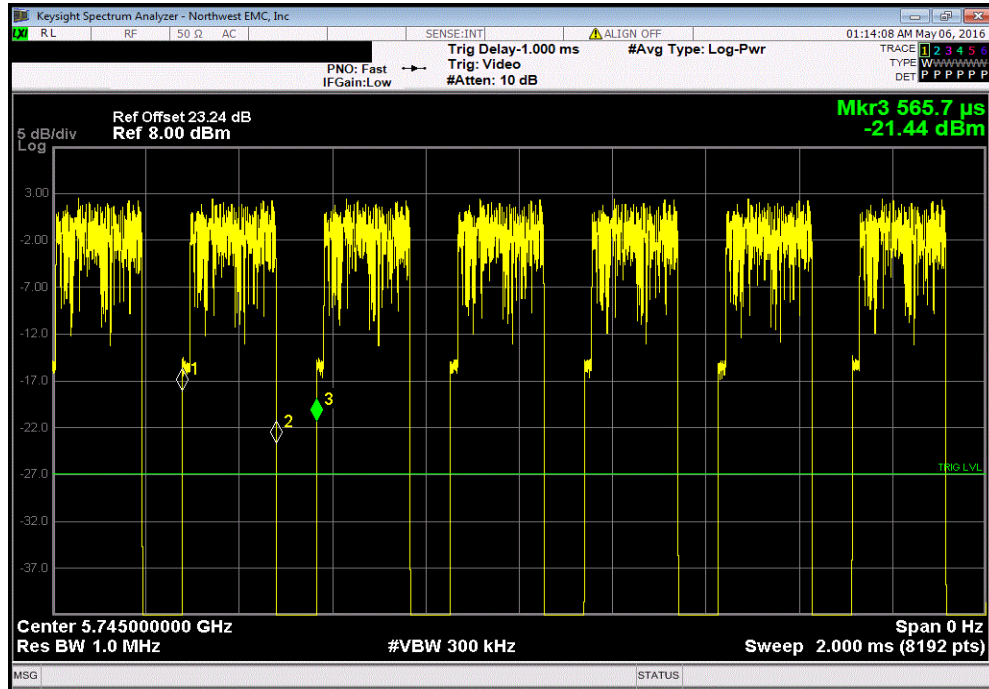


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

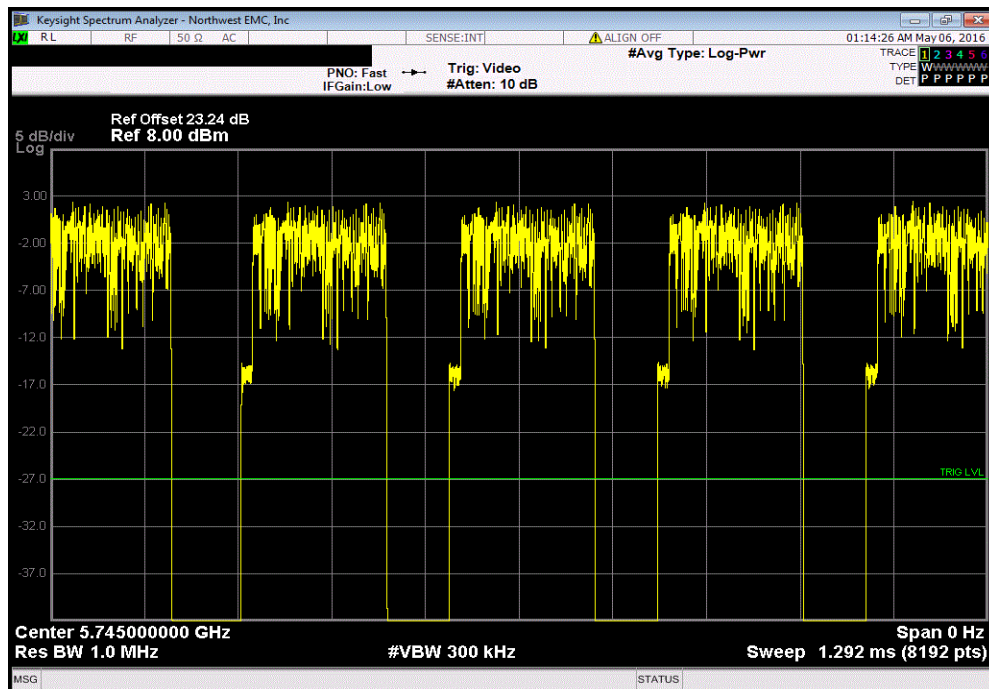


DUTY CYCLE

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 18 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
88.383 μ s	175.3 μ s	1	50.4	N/A	N/A	

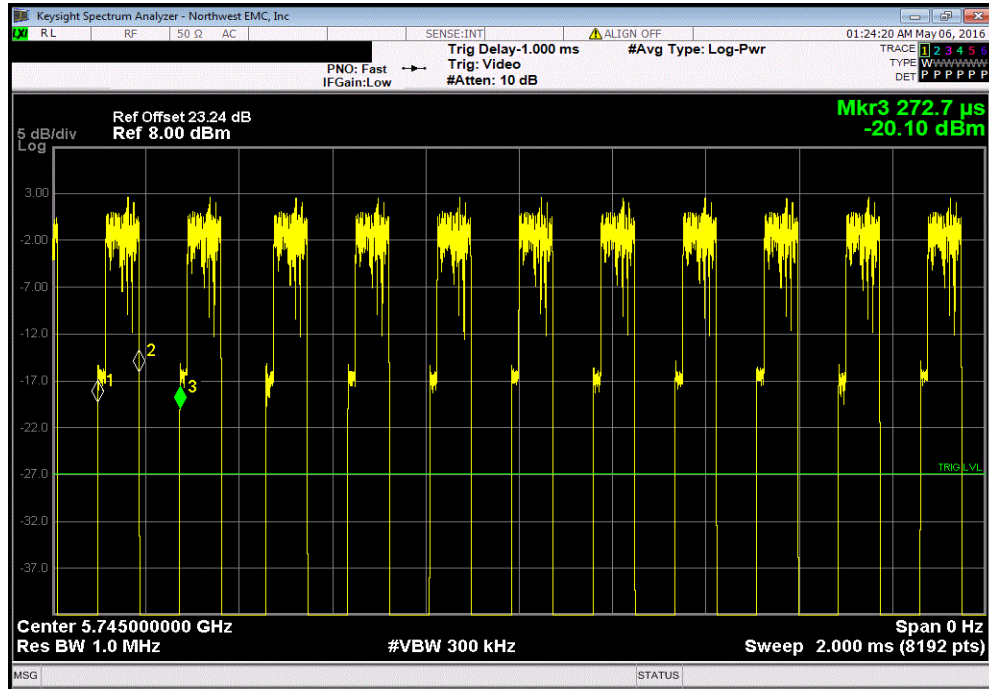


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 18 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

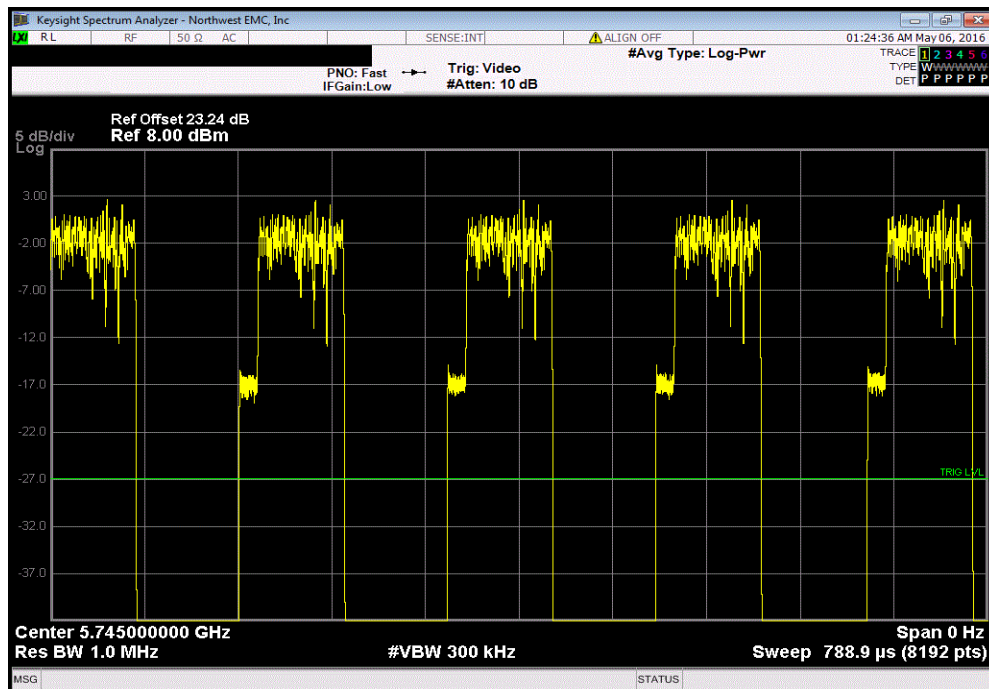


DUTY CYCLE

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
60.594 us	147.3 us	1	41.1	N/A	N/A	

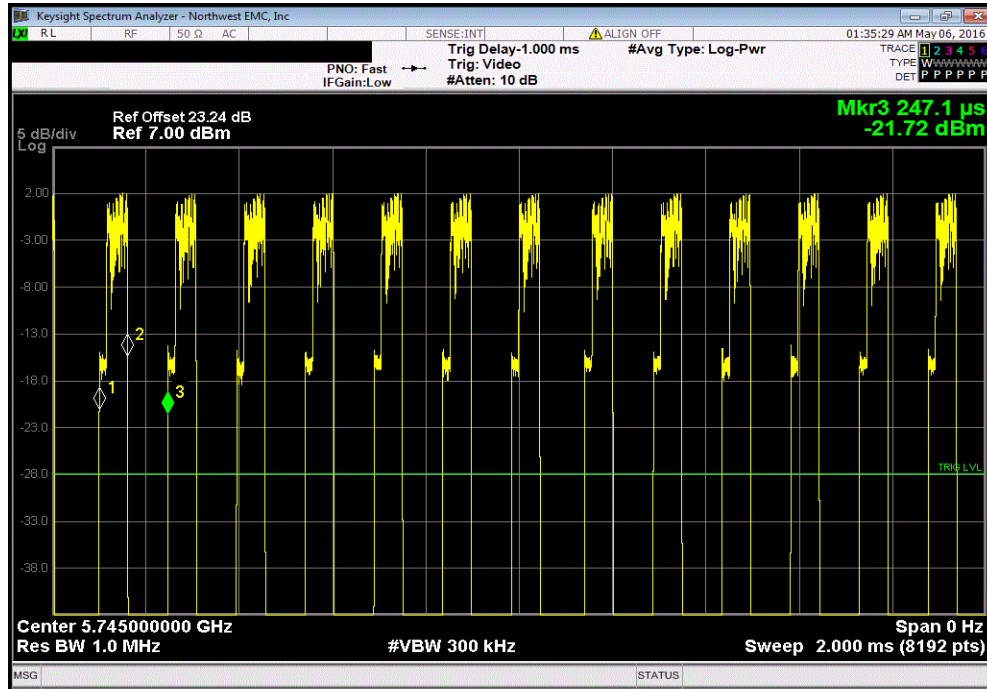


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

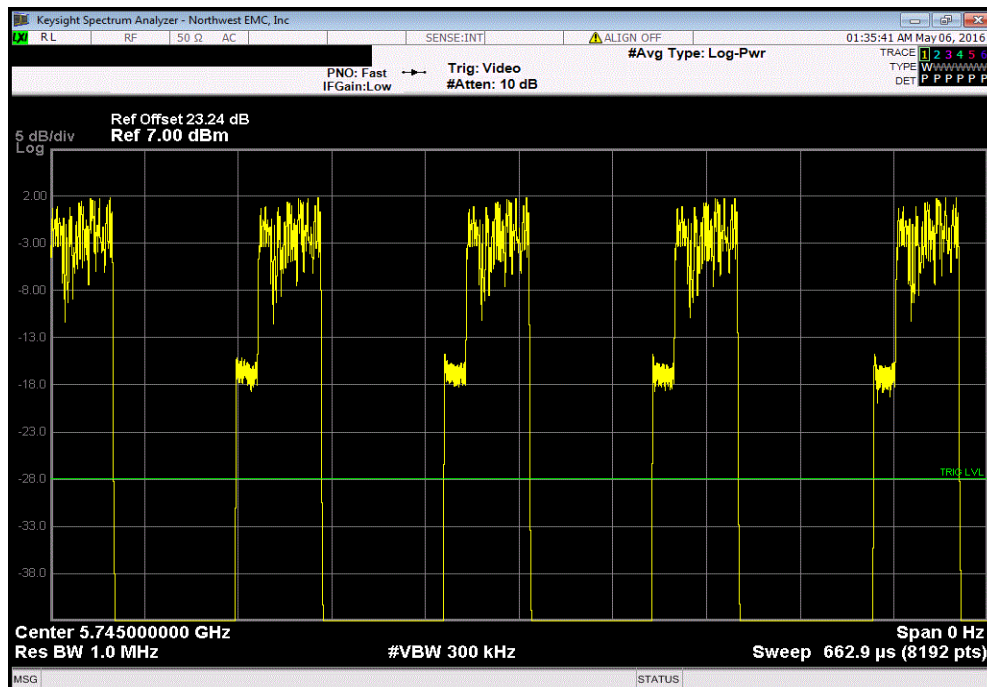


DUTY CYCLE

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 6 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
200.438 us	287.1 us	1	69.8	N/A	N/A	

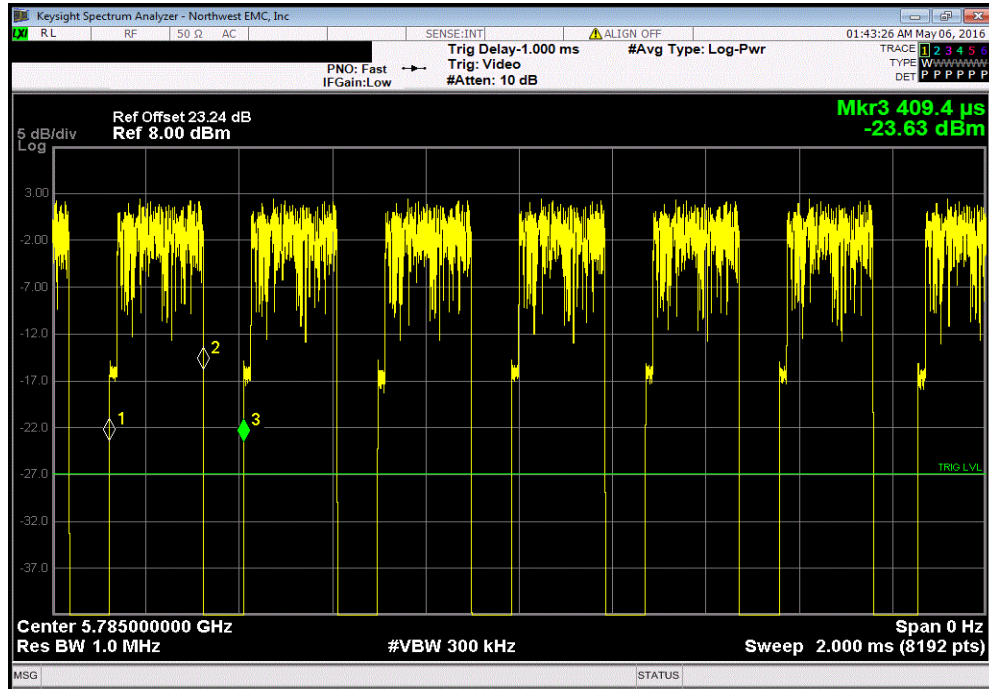


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 6 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

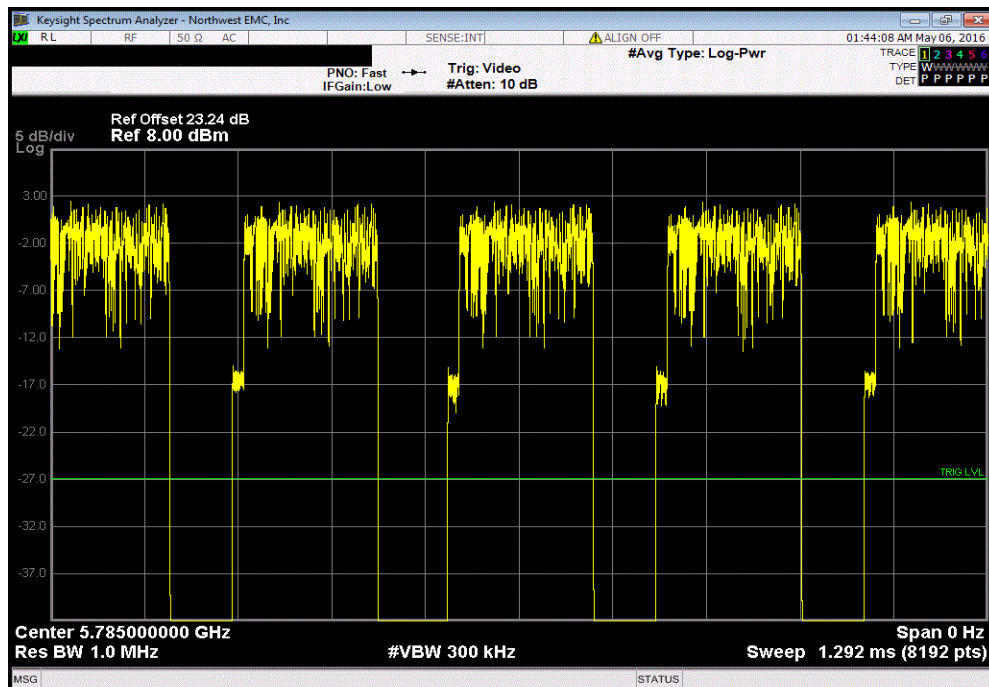


DUTY CYCLE

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 18 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
88.683 us	175.356 us	1	50.6	N/A	N/A	

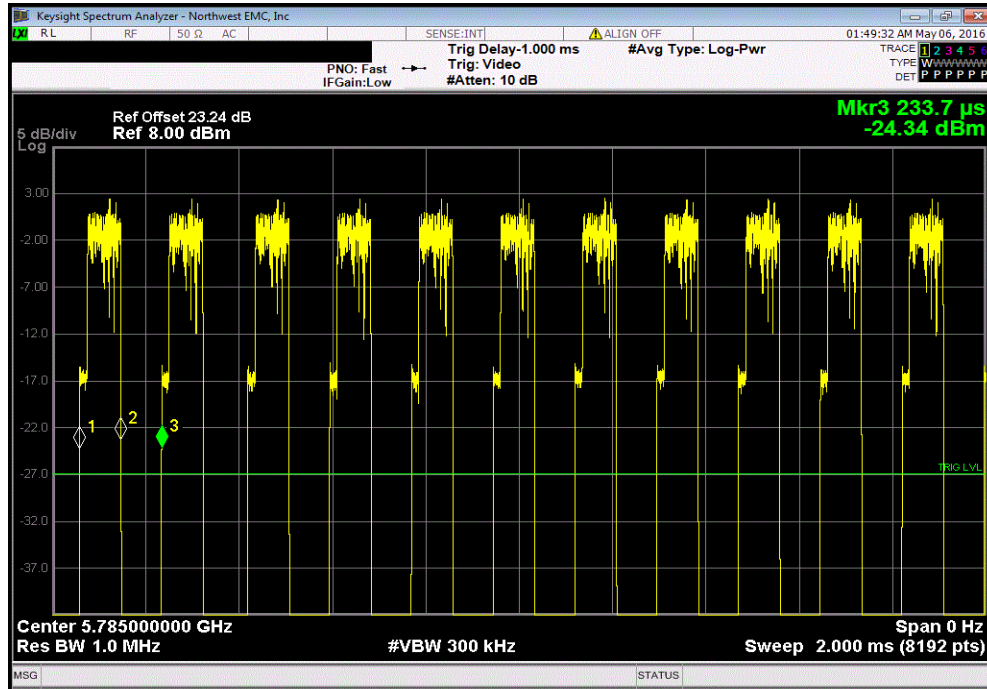


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 18 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

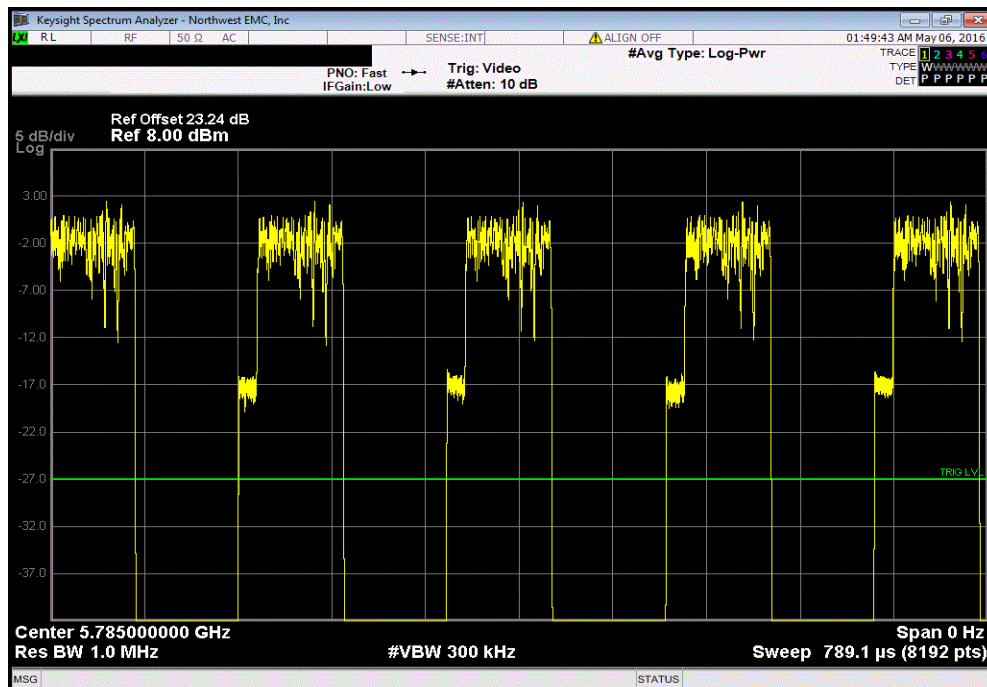


DUTY CYCLE

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 36 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
60.538 us	147.3 us	1	41.1	N/A	N/A	

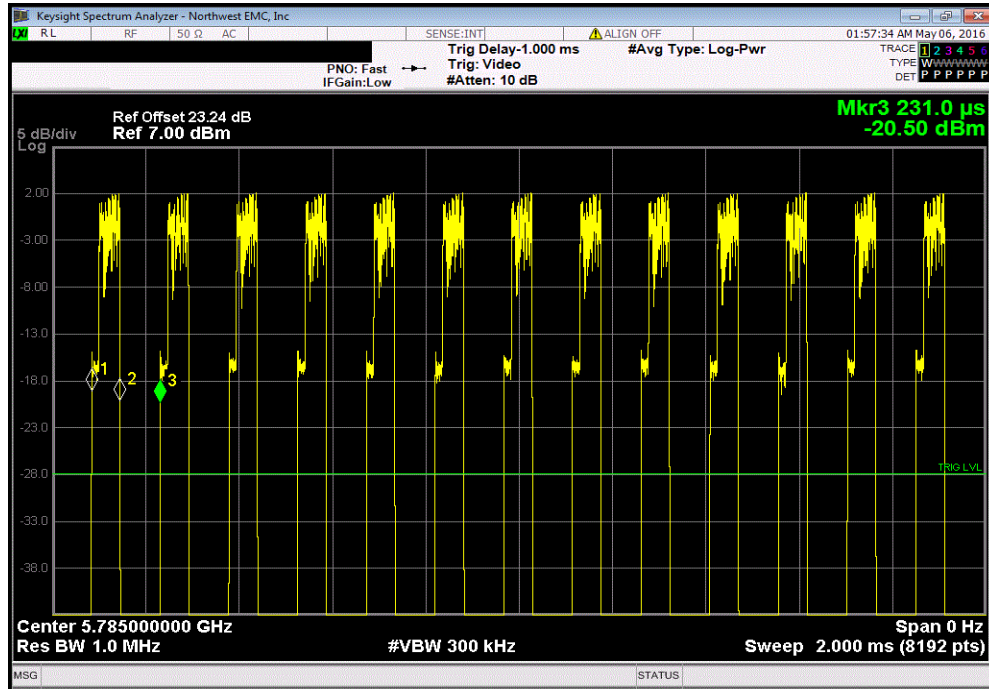


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 36 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

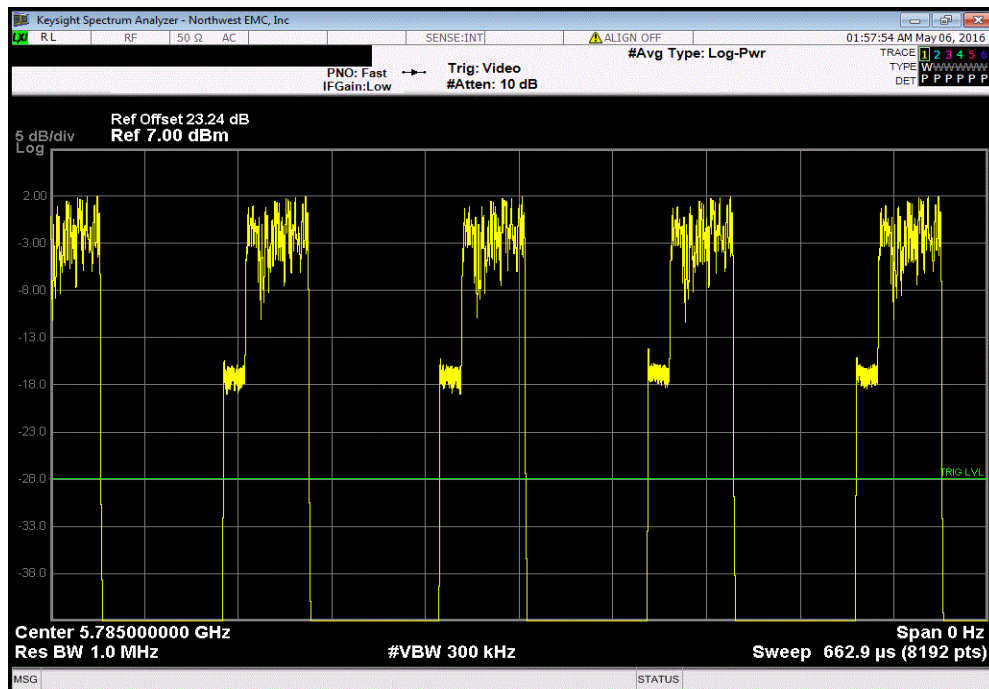

DUTY CYCLE

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 6 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
200.438 us	297.1 us	1	67.5	N/A	N/A	

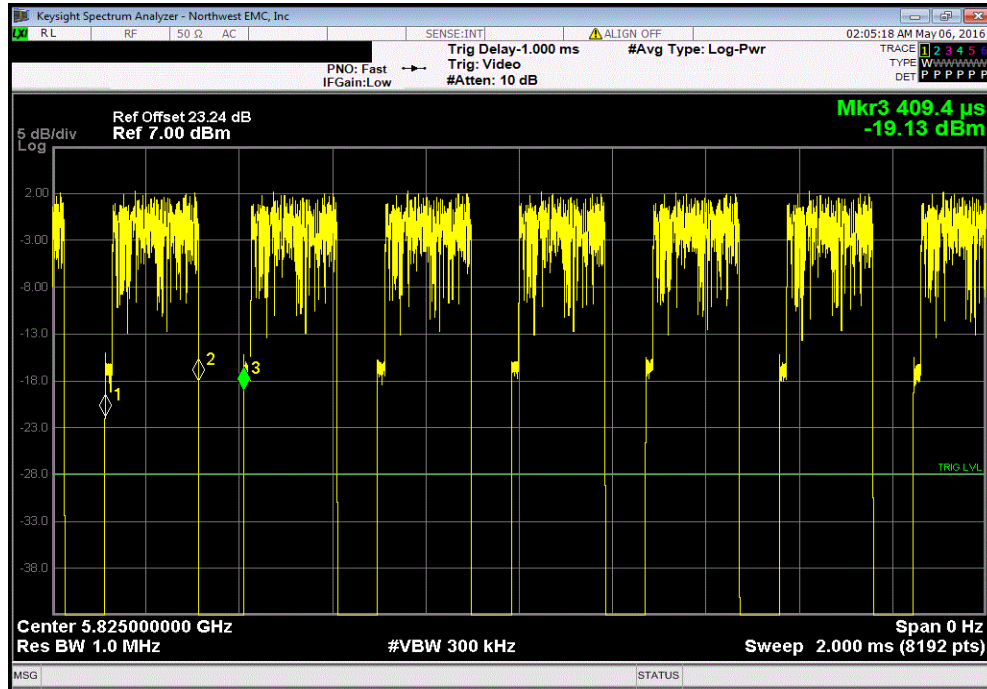


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 6 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	




DUTY CYCLE

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 18 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
88.627 us	175.3 us	1	50.6	N/A	N/A	

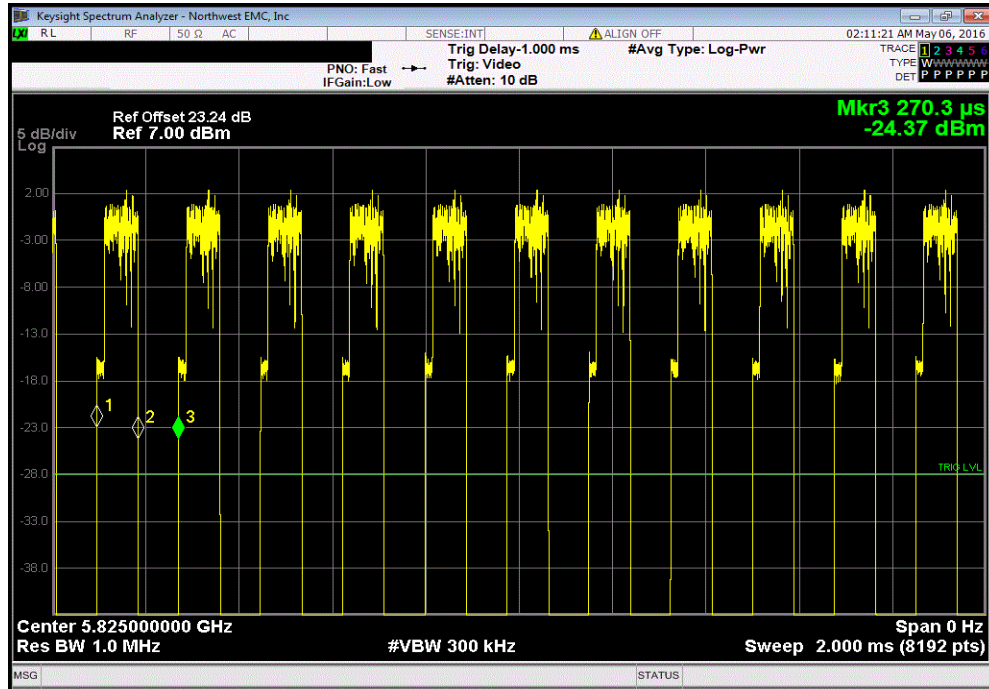


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 18 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

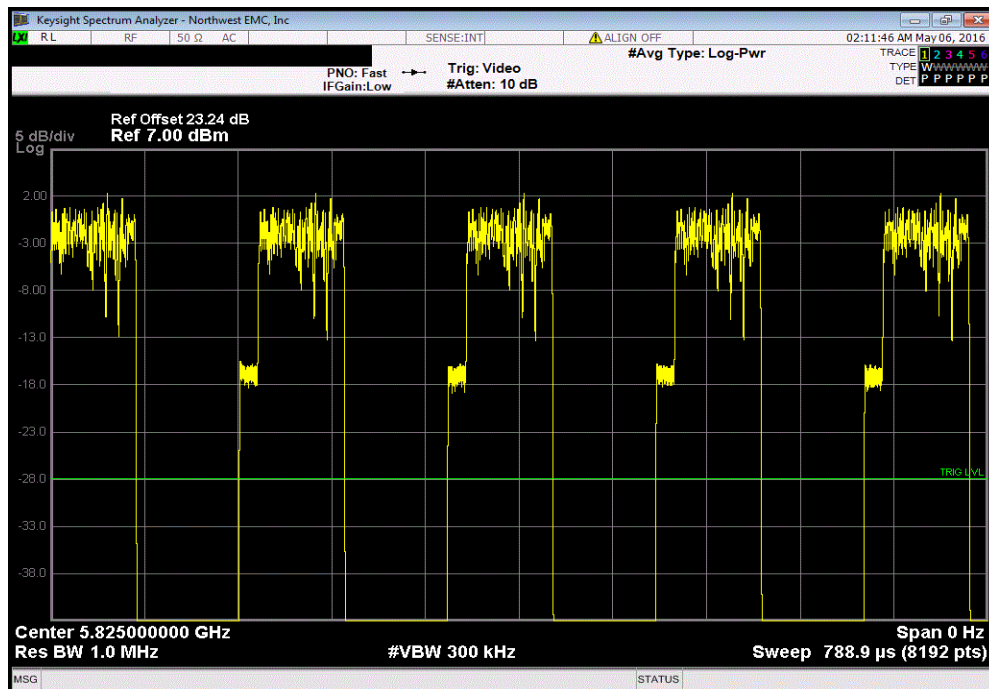


DUTY CYCLE

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 36 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
60.783 us	147.256 us	1	41.3	N/A	N/A	

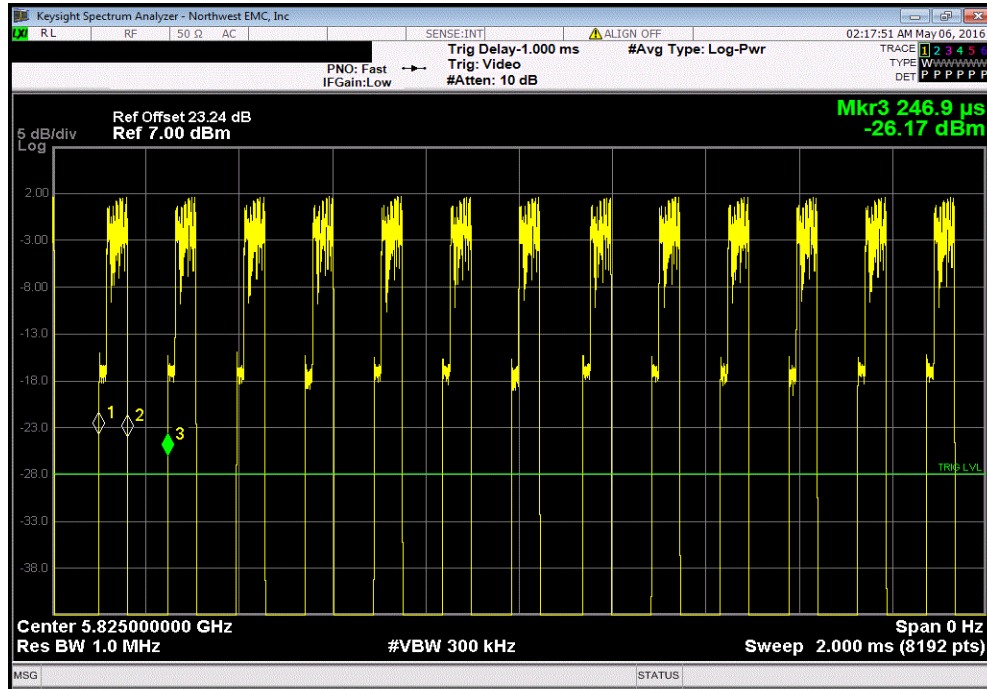

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 36 Mbps						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

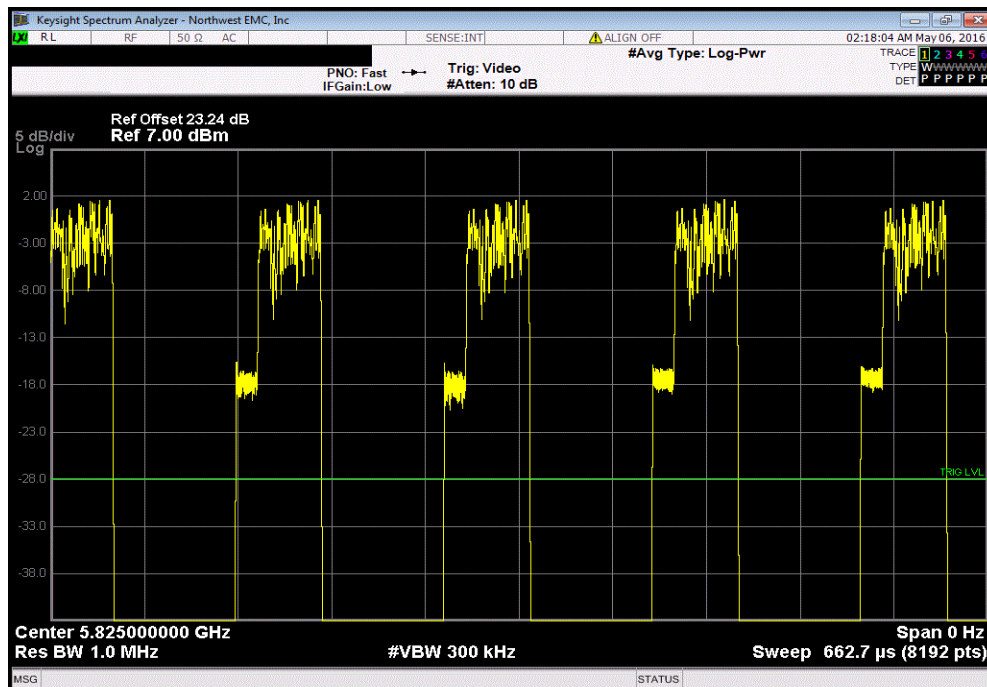

MAXIMUM CONDUCTED OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Generator - Signal	Keysight	N5182B	TFU	NCR	0
Block - DC	Pasternack	PE8210	AME	10/1/2015	12
Attenuator	S.M. Electronics	SA26B-20	AWT	NCR	0
Cable	ESM Cable Corp.	TT	EV1	NCR	0
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2/13/2016	12

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum. The radio was operated in the modes as shown in the following data sheets.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer.

Prior to measuring maximum transmit power; the emission bandwidth (B) and the transmission pulse duration (T) were measured. The method of measuring the emission bandwidth and the associated data are found elsewhere in this test report. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The maximum conducted output power was measured using ANSI C63.10, Method SA-2 (RMS detection and trace averaging across the on and off times of the EUT transmission and use of a duty cycle correction factor).

The spectrum analyzer settings were set per the guidance as well as the following specifics:

- RMS Detector
- Trace average 100 traces in power averaging mode.
- Power was integrated across "B", by using the channel power function of the analyzer.


A duty cycle correction factor was added to the measurement using the results of the formula of $10 \cdot \log(1/D)$ where D is the duty cycle.

MAXIMUM CONDUCTED OUTPUT POWER


EUT: Athena 4XC		Work Order: FOCU0211	
Serial Number: 02EA3100ACAE		Date: 05/05/16	
Customer: Summit Semiconductor LLC		Temperature: 23.9°C	
Attendees: Dave Schilling		Humidity: 40%	
Project: C2PC		Barometric Pres.: 1015.8	
Tested by: Jeff Alcock and Rod Peloquin		Power: 5.0 VDC	
Job Site: EV06			
TEST SPECIFICATIONS		Test Method	
FCC 15.407:2016		ANSI C63.10:2013	
COMMENTS			
Testing performed on Antenna Port 1 - U.FL			
DEVIATIONS FROM TEST STANDARD			
Configuration #	2	Signature 	
		Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)
		Value (dBm)	Limit (dBm)
			Results
5725 - 5785 MHz Band			
Low Channel, Ch 149 - 5745 MHz			
	802.11(a) 6 Mbps	11.079	1.6
	802.11(a) 18 Mbps	9.415	3
	802.11(a) 36 Mbps	8.578	3.9
Mid Channel, Ch 157 - 5785 MHz			
	802.11(a) 6 Mbps	10.967	1.6
	802.11(a) 18 Mbps	9.3	3
	802.11(a) 36 Mbps	8.521	3.9
High Channel, Ch 165 - 5825 MHz			
	802.11(a) 6 Mbps	10.633	1.7
	802.11(a) 18 Mbps	9.436	3
	802.11(a) 36 Mbps	8.126	3.8

MAXIMUM CONDUCTED OUTPUT POWER

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
11.079	1.6		12.6	30	Pass	

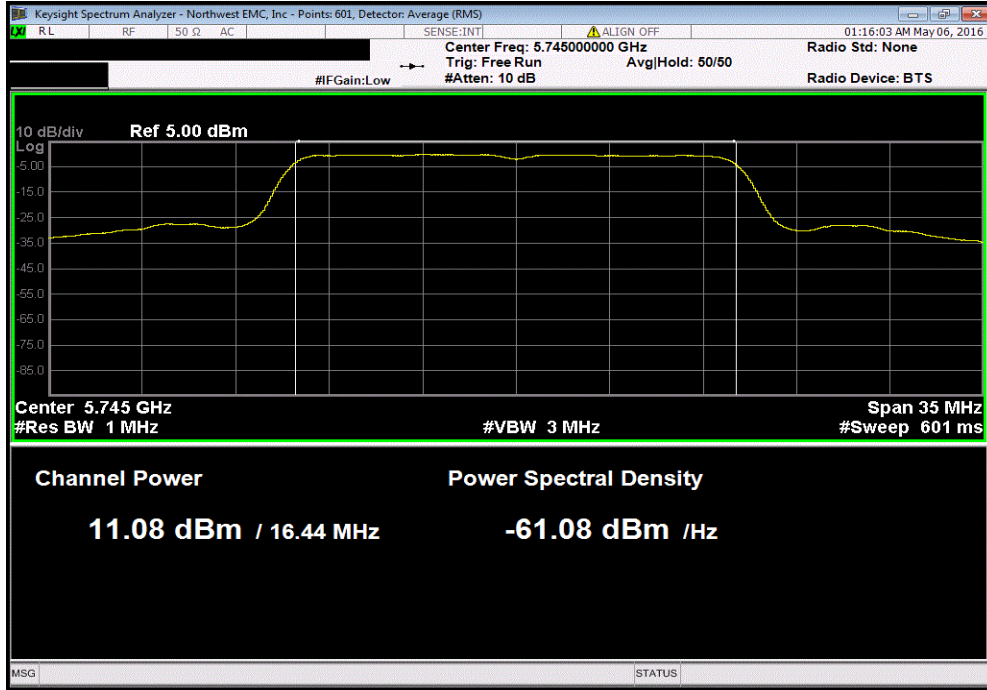


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 18 Mbps						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
9.415	3		12.4	30	Pass	

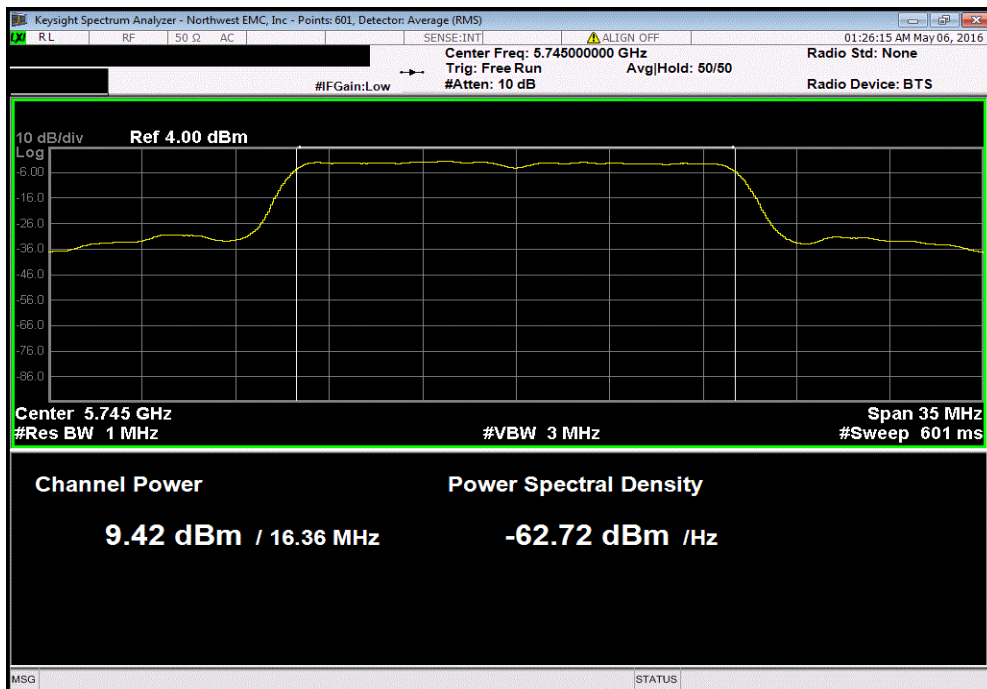


MAXIMUM CONDUCTED OUTPUT POWER

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps						
Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)	Value (dBm)	Limit (dBm)	Results		
8.578	3.9	12.4	30	Pass		

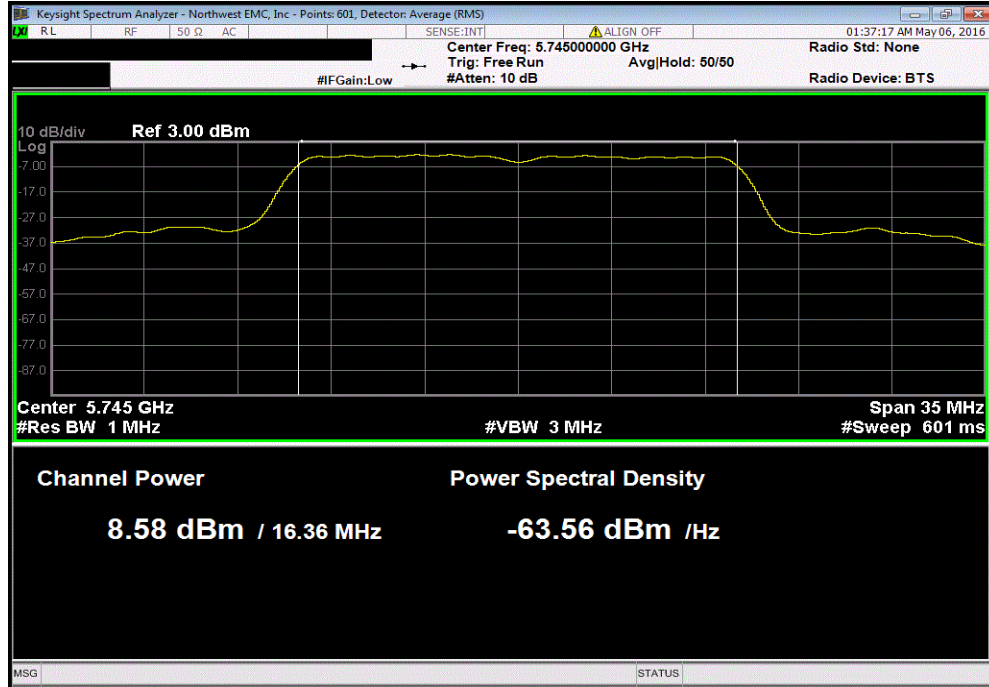


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 6 Mbps						
Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)	Value (dBm)	Limit (dBm)	Results		
10.967	1.6	12.5	30	Pass		

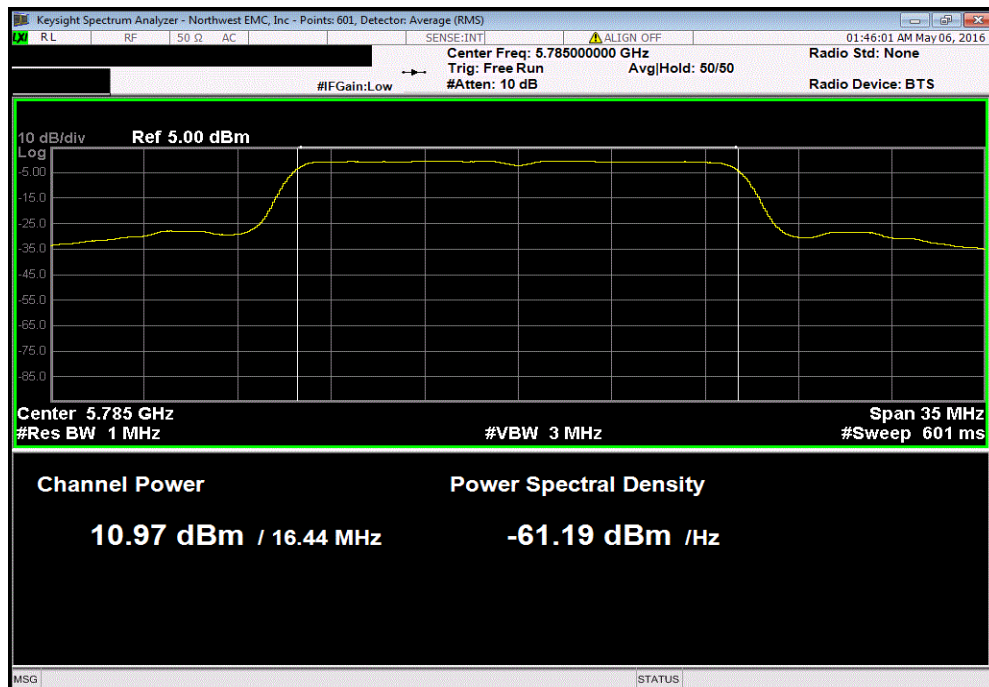


MAXIMUM CONDUCTED OUTPUT POWER

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 18 Mbps						
Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)	Value (dBm)	Limit (dBm)	Results		
9.3	3	12.3	30	Pass		

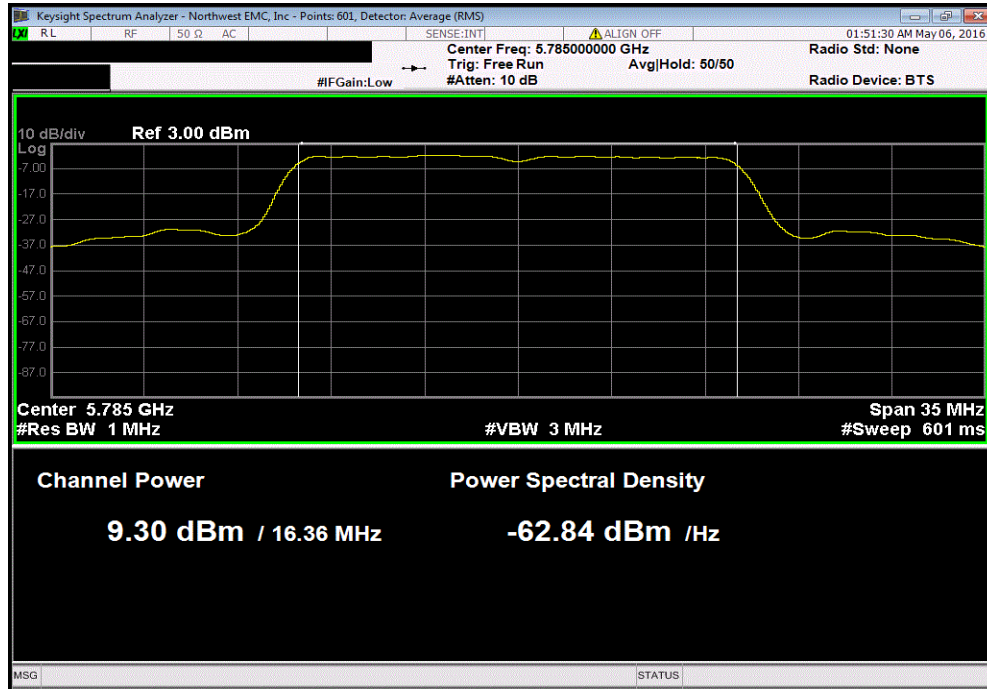


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 36 Mbps						
Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)	Value (dBm)	Limit (dBm)	Results		
8.521	3.9	12.4	30	Pass		

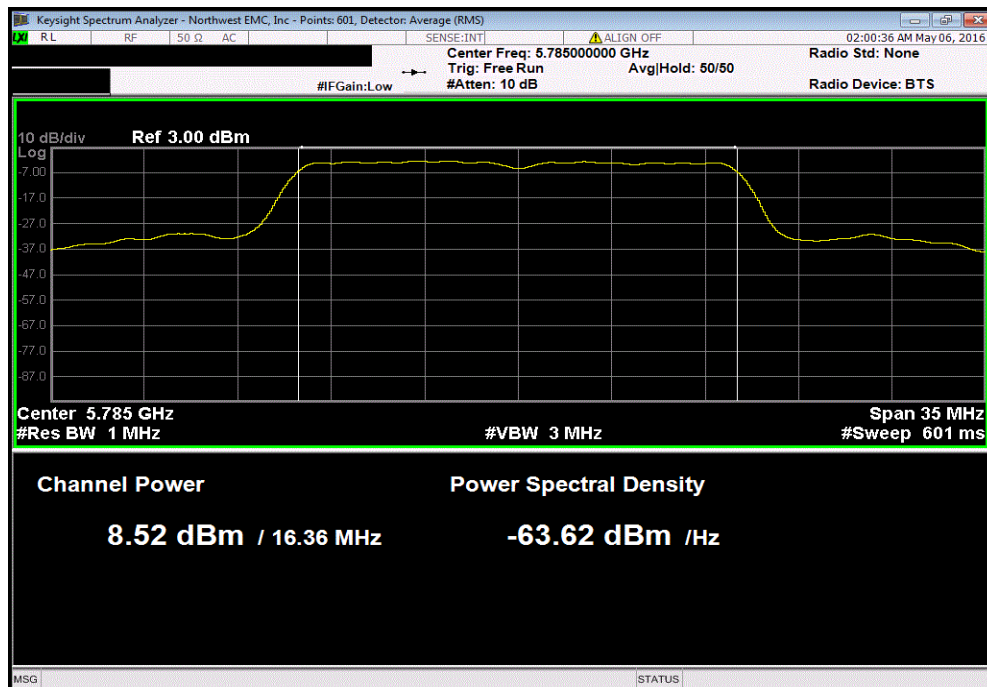


MAXIMUM CONDUCTED OUTPUT POWER

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 6 Mbps						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
10.633	1.7		12.3	30	Pass	

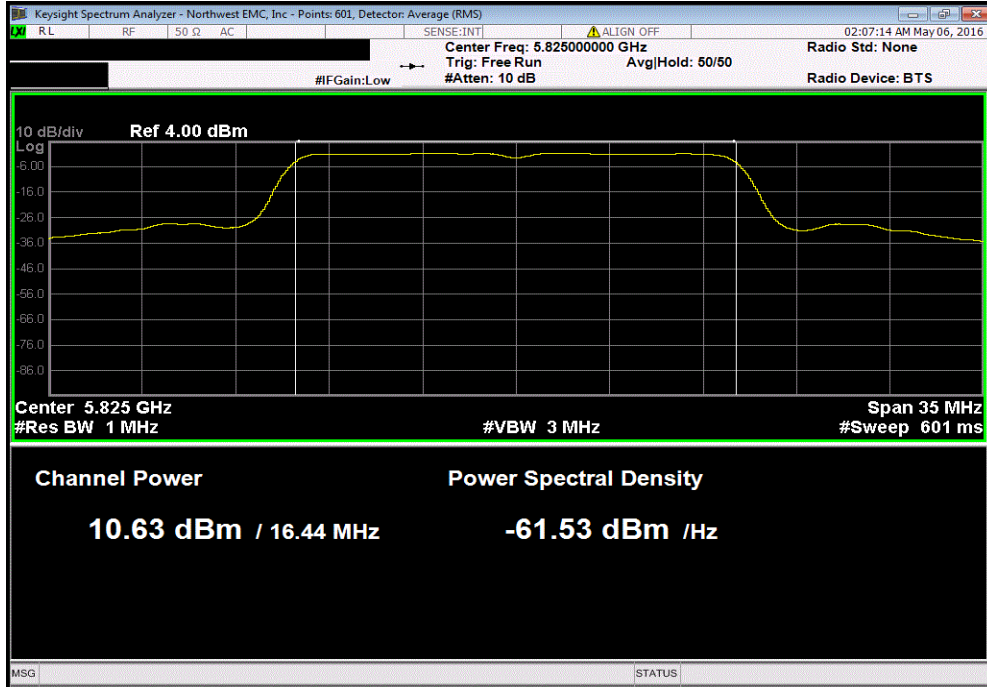


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 18 Mbps						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
9.436	3		12.4	30	Pass	

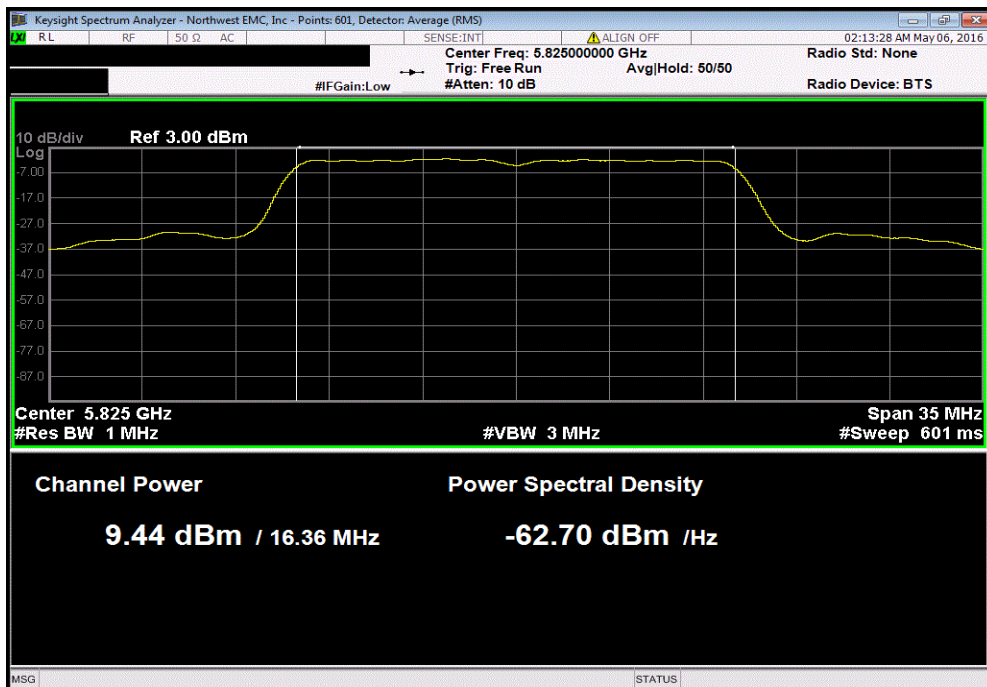

MAXIMUM CONDUCTED OUTPUT POWER

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 36 Mbps						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
8.126	3.8	12	30	Pass		

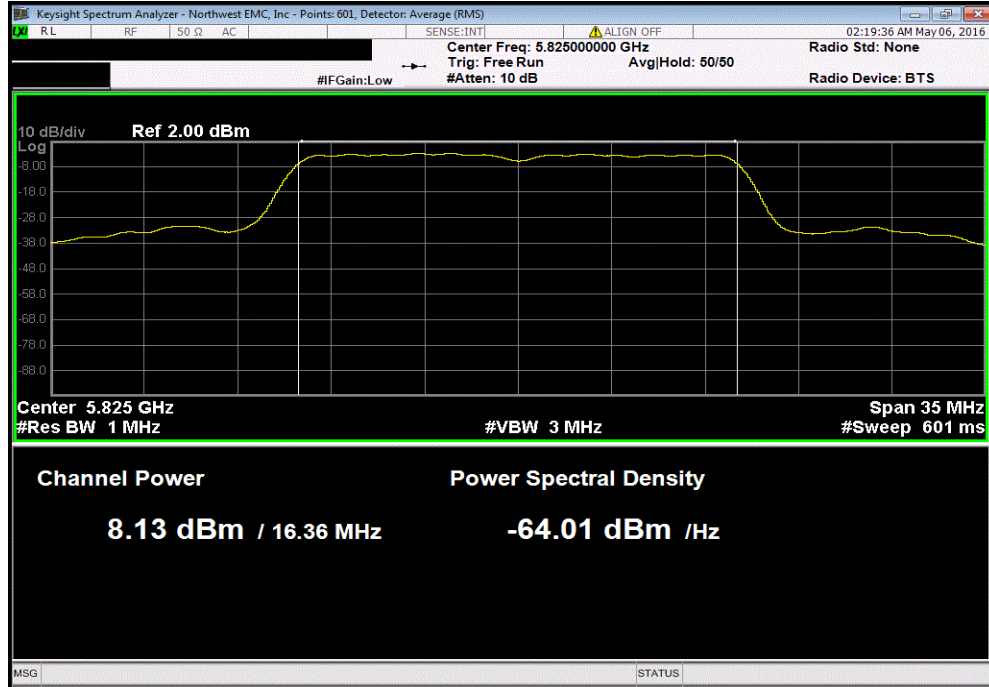

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Cable	ESM Cable Corp.	TT	EV1	NCR	0
Generator - Signal	Keysight	N5182B	TFU	NCR	0
Attenuator	S.M. Electronics	SA26B-20	AWT	NCR	0
Block - DC	Pasternack	PE8210	AME	10/1/2015	12
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2/13/2016	12

TEST DESCRIPTION

The transmit frequencies and data rates listed in the datasheet were measured in each band utilized by the radio. The transmit power was set to its default maximum.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

Per ANSI C63.10, the spectrum analyzer settings were as follows:

-RBW = 100 kHz

-VBW = $\geq 3 \times$ RBW

-Detector = Peak

-Trace mode = max hold

The spectrum analyzer occupied bandwidth measurement function was then used to measure the 6 dB emission bandwidth.

The 99.0% occupied bandwidth was also measured at the same time to be used for setting the channel power integration bandwidth during conducted output power testing.


OCCUPIED BANDWIDTH

EUT: Athena 4XC		Work Order: FOCU0211	
Serial Number: 02EA3100ACAE		Date: 05/05/16	
Customer: Summit Semiconductor LLC		Temperature: 23.9°C	
Attendees: Dave Schilling		Humidity: 40%	
Project: C2PC		Barometric Pres.: 1015.8	
Tested by: Jeff Alcock and Rod Peloquin		Power: 5.0 VDC	
TEST SPECIFICATIONS		Test Method	
FCC 15.407:2016		ANSI C63.10:2013	
COMMENTS			
Testing performed on Antenna Port 1 - U.FL			
DEVIATIONS FROM TEST STANDARD			
Configuration #	2	Signature 	
		Value	Limit (>)
5725 - 5785 MHz Band			
Low Channel, Ch 149 - 5745 MHz			
	802.11(a) 6 Mbps	15.734 MHz	500 kHz
	802.11(a) 18 Mbps	15.734 MHz	500 kHz
	802.11(a) 36 Mbps	15.164 MHz	500 kHz
Mid Channel, Ch 157 - 5785 MHz			
	802.11(a) 6 Mbps	16.288 MHz	500 kHz
	802.11(a) 18 Mbps	15.892 MHz	500 kHz
	802.11(a) 36 Mbps	15.164 MHz	500 kHz
High Channel, Ch 165 - 5825 MHz			
	802.11(a) 6 Mbps	16.297 MHz	500 kHz
	802.11(a) 18 Mbps	15.88 MHz	500 kHz
	802.11(a) 36 Mbps	15.164 MHz	500 kHz
			Result
			Pass
			Pass
			Pass
			Pass
			Pass
			Pass
			Pass

OCCUPIED BANDWIDTH


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps

	Value	Limit	Result
	15.734 MHz	(>) 500 kHz	Pass

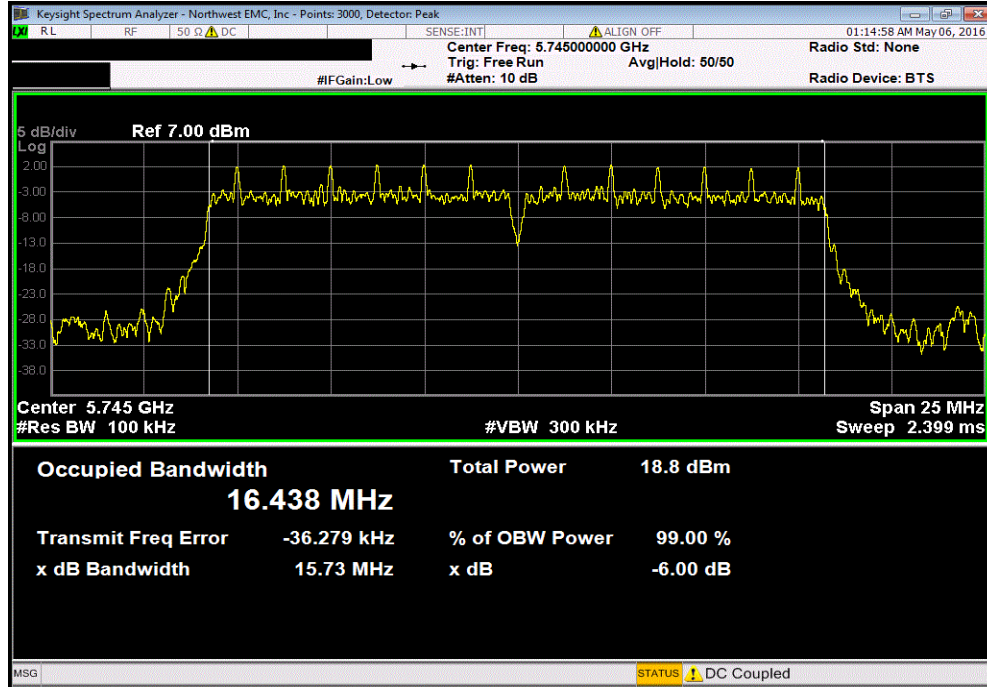

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 18 Mbps


	Value	Limit	Result
	15.734 MHz	(>) 500 kHz	Pass

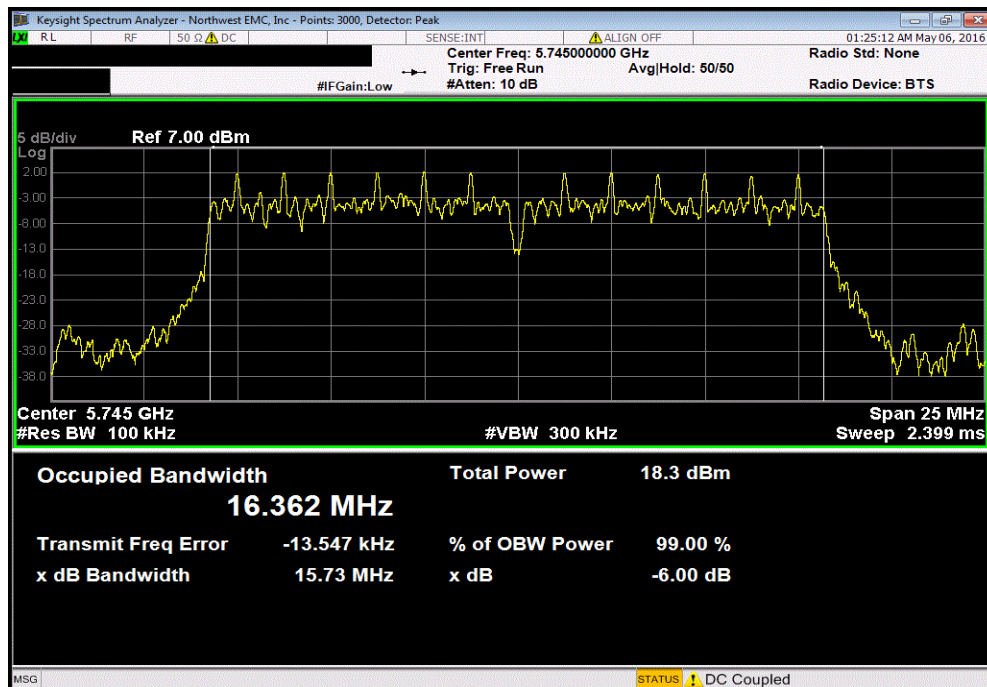

OCCUPIED BANDWIDTH


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps

	Value	Limit	Result
	15.164 MHz	500 kHz	Pass

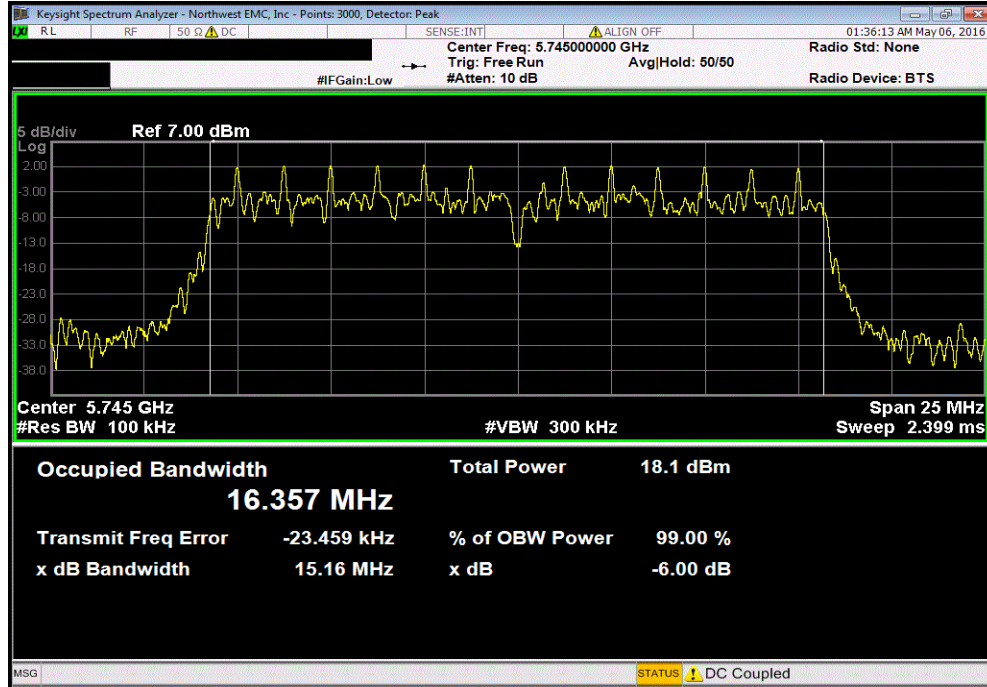


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 6 Mbps

	Value	Limit	Result
	16.288 MHz	500 kHz	Pass

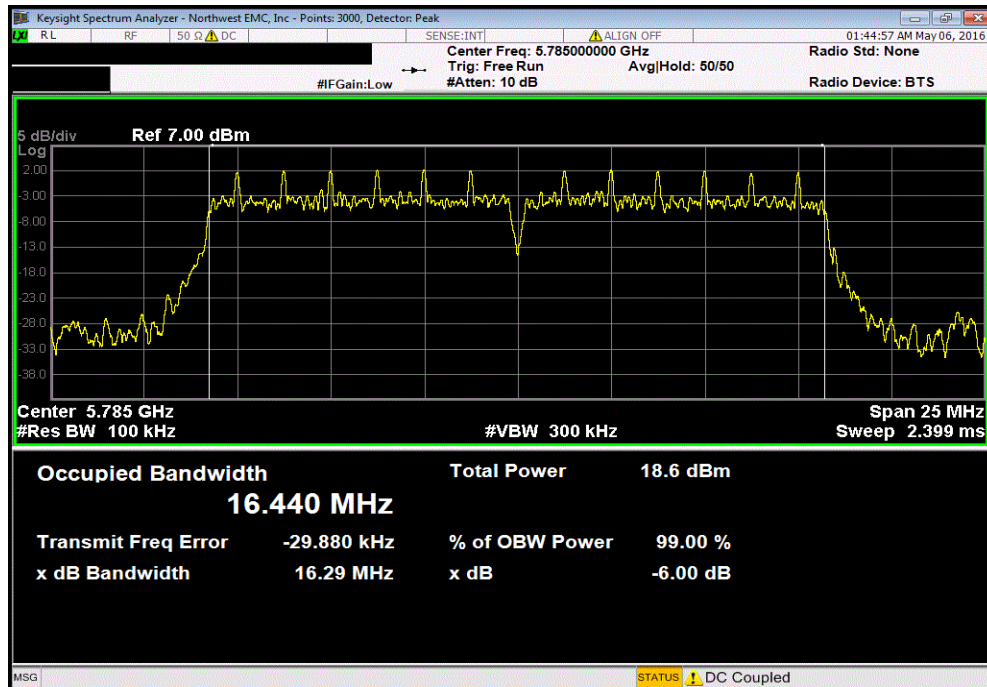


OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 18 Mbps						
				Value	Limit	Result
				15.892 MHz	500 kHz	Pass

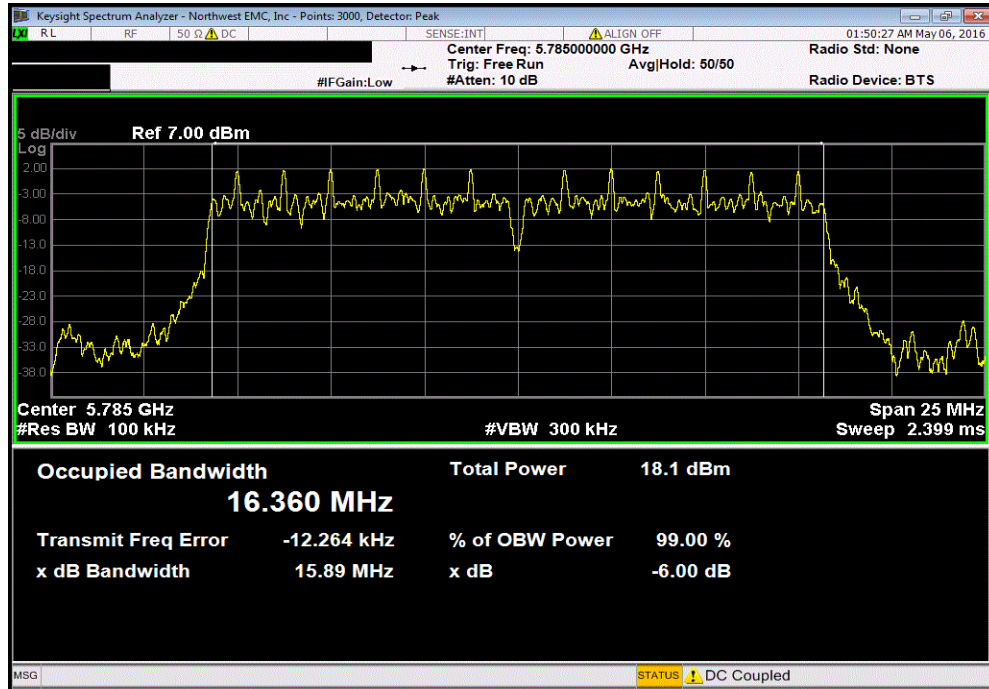


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 36 Mbps						
				Value	Limit	Result
				15.164 MHz	500 kHz	Pass

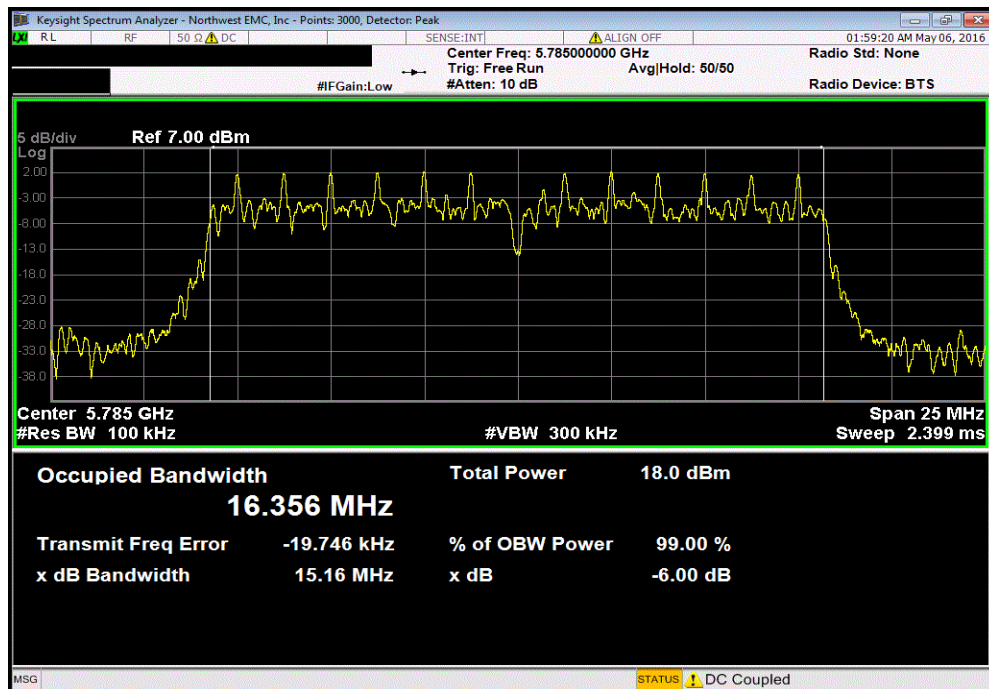

OCCUPIED BANDWIDTH


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 6 Mbps

	Value	Limit	Result
	16.297 MHz	(>) 500 kHz	Pass

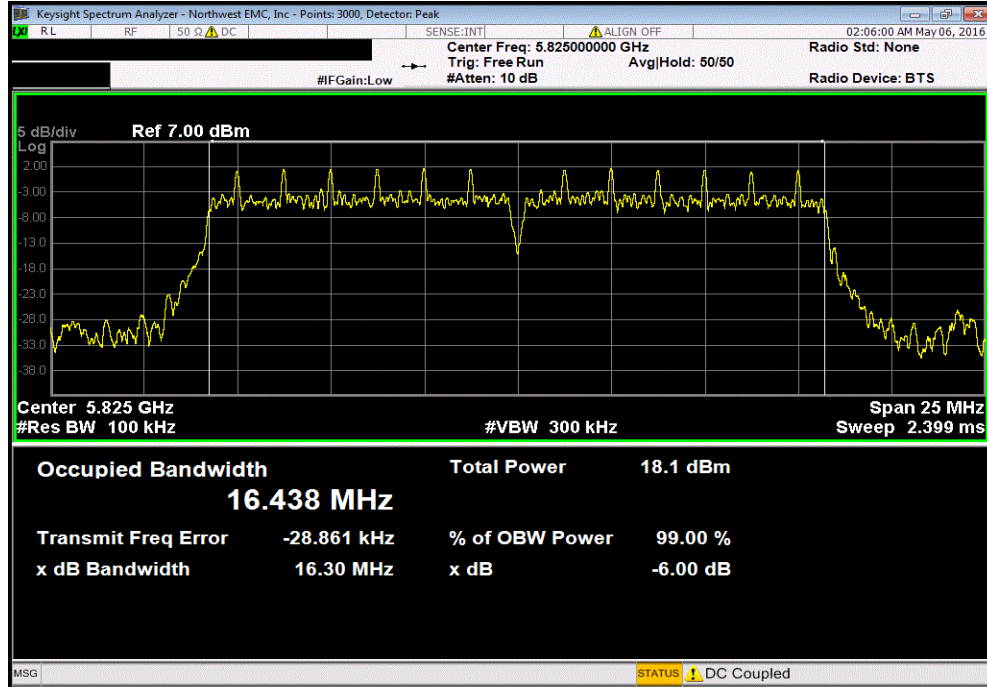


5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 18 Mbps

	Value	Limit	Result
	15.88 MHz	(>) 500 kHz	Pass

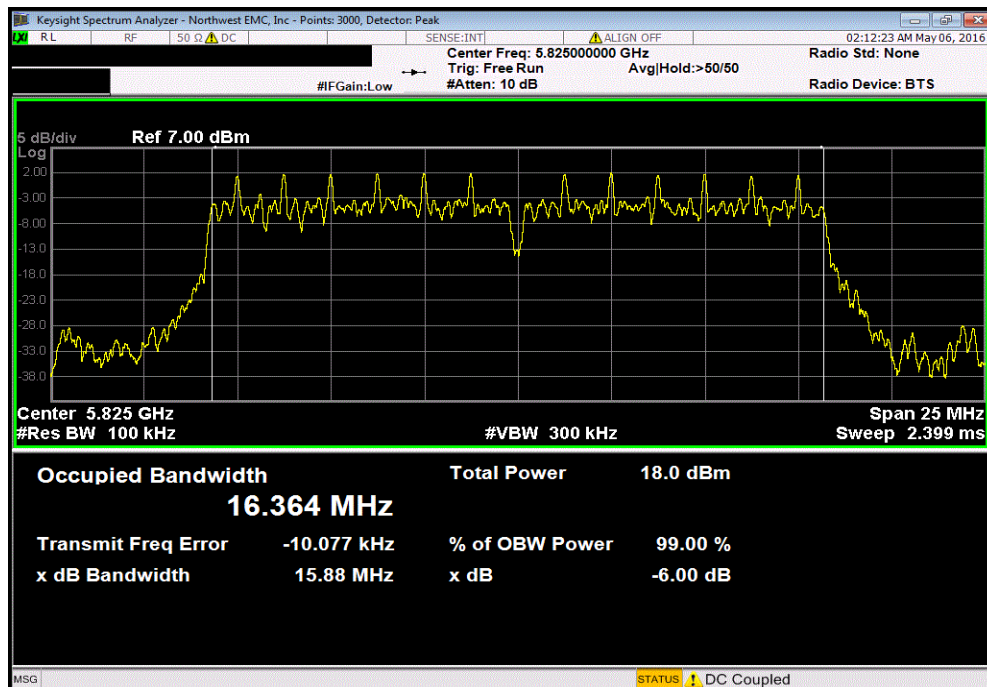

OCCUPIED BANDWIDTH

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 36 Mbps							
Value					Limit (>)		Result
				15.164 MHz	500 kHz	Pass	

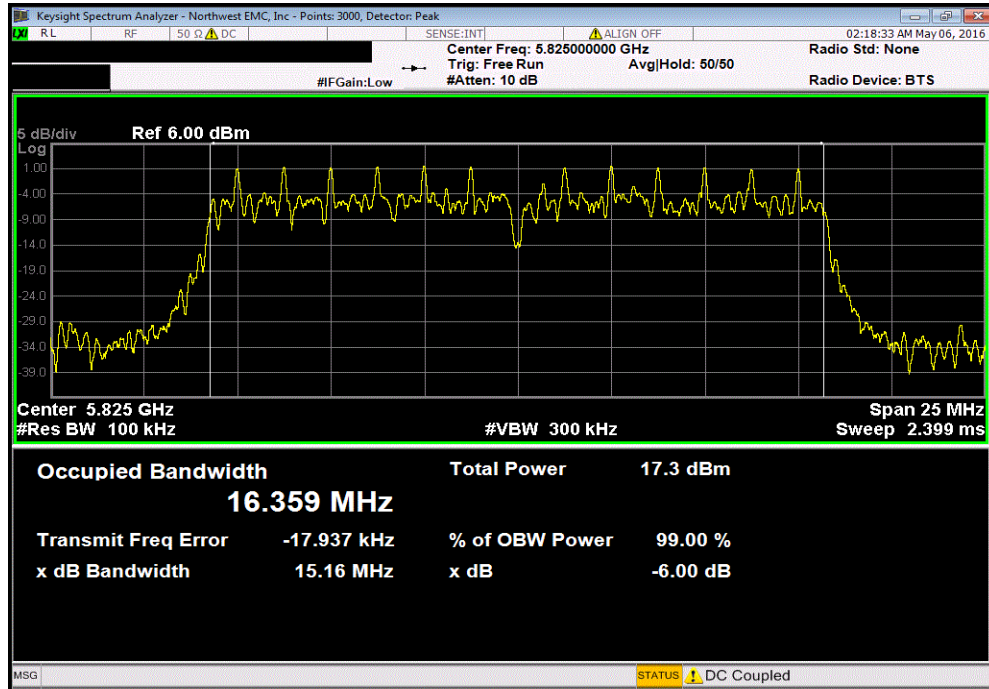

BAND EDGE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Generator - Signal	Keysight	N5182B	TFU	NCR	0
Cable	ESM Cable Corp.	TT	EV1	NCR	0
Block - DC	Pasternack	PE8210	AME	10/1/2015	12
Attenuator	S.M. Electronics	SA26B-20	AWT	NCR	0
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2/13/2016	12

TEST DESCRIPTION

The 99% emission bandwidth of the carrier was measured to ensure that no part of the emission of the carrier operating in a non-DFS band was operating in a band where DFS testing is required. This test is done with the U-NII-1 band (5.2 GHz band) to ensure no portion of the carrier is contained within the U-NII-2A band and with the U-NII-3 band (5.8 GHz band) to ensure no portion of the carrier is contained in the U-NII-2C band.

The transmit frequencies and data rates listed in the datasheet were measured.

The transmit power was set to its default maximum.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

BAND EDGE




XMR 2015.01.14


EUT: Athena 4XC		Work Order: FOCU0211	
Serial Number: 02EA3100ACAE		Date: 05/05/16	
Customer: Summit Semiconductor LLC		Temperature: 23.9°C	
Attendees: Dave Schilling		Humidity: 40%	
Project: C2PC		Barometric Pres.: 1015.8	
Tested by: Jeff Alcock and Rod Peloquin		Power: 5.0 VDC	
Job Site: EV06			
TEST SPECIFICATIONS			
FCC 15.407:2016		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Testing performed on Antenna Port 1 - U.FL			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		OBW	Band Edge
		Within Band	(MHz)
			Result
5725 - 5785 MHz Band			
Low Channel, Ch 149 - 5745 MHz			
802.11(a) 6 Mbps		Yes	5725 Pass
802.11(a) 18 Mbps		Yes	5725 Pass
802.11(a) 36 Mbps		Yes	5725 Pass

BAND EDGE

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps						
OBW			Band Edge		Result	
Within Band			(MHz)			
Yes			5725		Pass	

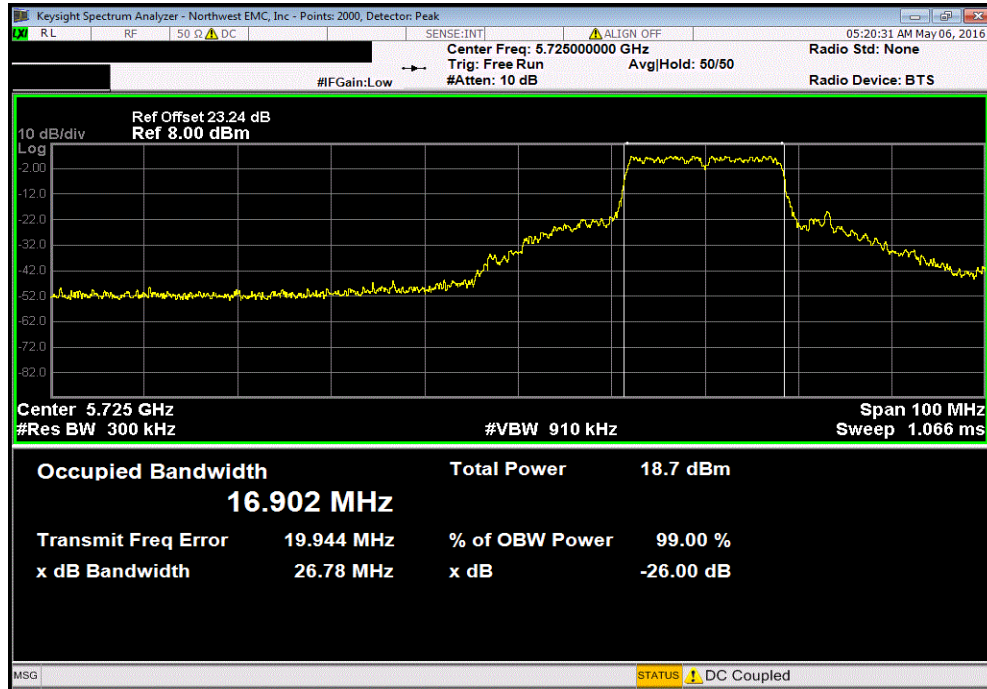


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 18 Mbps						
OBW			Band Edge		Result	
Within Band			(MHz)			
Yes			5725		Pass	

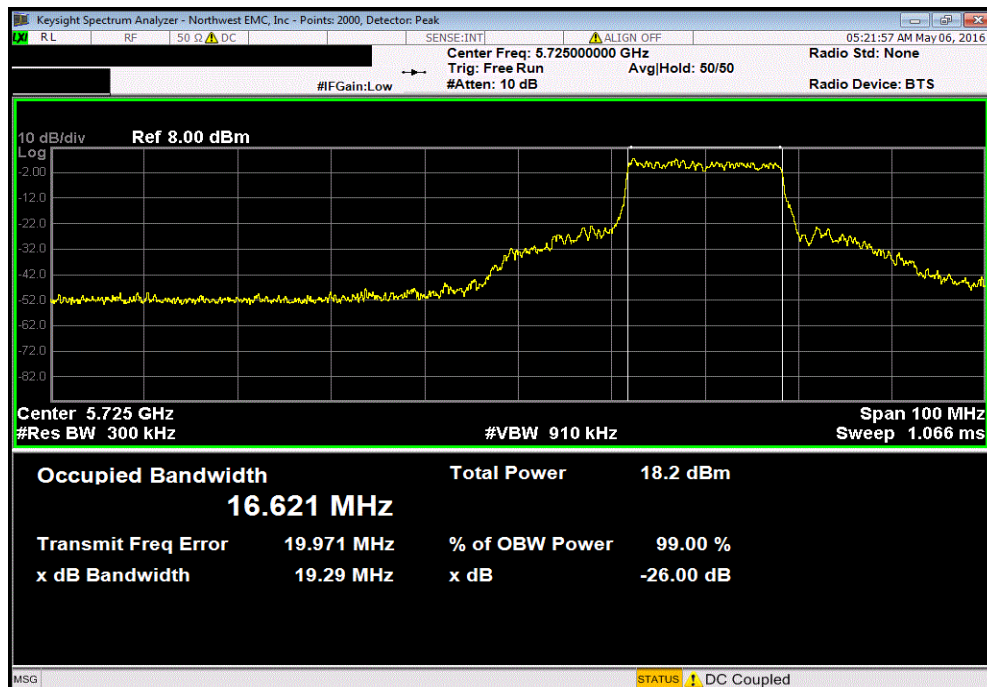

BAND EDGE

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps						
			OBW	Band Edge		
			Within Band	(MHz)	Result	
			Yes	5725	Pass	

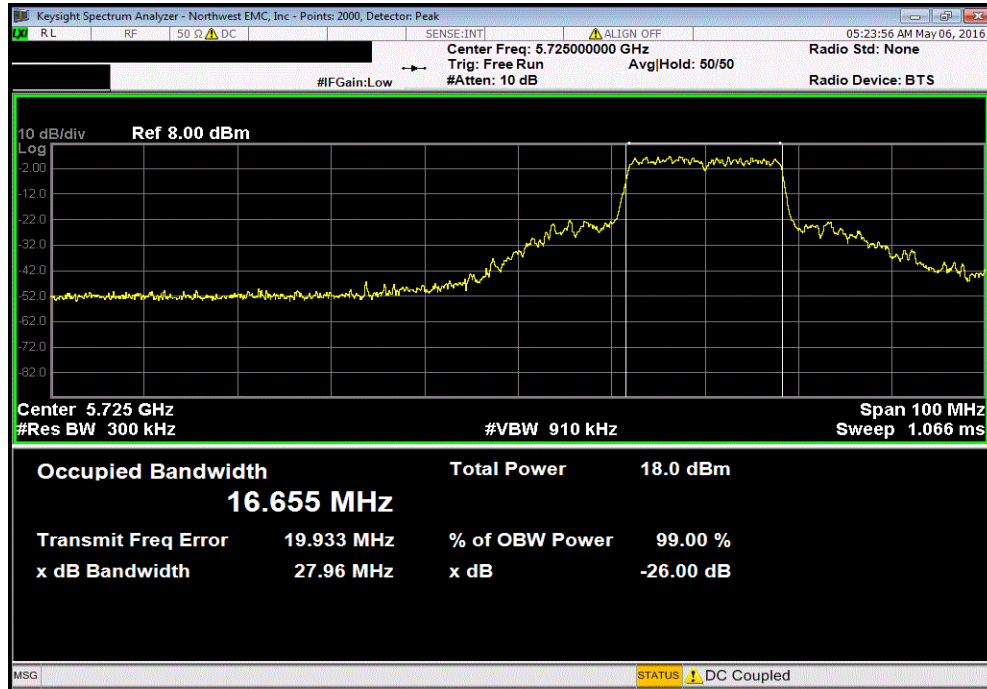

MAXIMUM POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Generator - Signal	Keysight	N5182B	TFU	NCR	0
Block - DC	Pasternack	PE8210	AME	10/1/2015	12
Attenuator	S.M. Electronics	SA26B-20	AWT	NCR	0
Cable	ESM Cable Corp.	TT	EV1	NCR	0
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFP	2/13/2016	12

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum. The radio was operated in the modes as shown in the following data sheets.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

Prior to measuring maximum power spectral density, the emission bandwidth (B) was measured. The method of measuring the emission bandwidth and the associated data are found elsewhere in this test report

The maximum power spectral density was measured using ANSI C63.10, Method SA-2 (RMS detection and trace averaging across the on and off times of the EUT transmission and use of a duty cycle correction factor), consistent with the method used for maximum conducted output power.

The spectrum analyzer settings were set per the guidance as well as the following specifics:

- Resolution Bandwidth of 510 kHz
- RMS Detector
- Trace average 100 traces in power averaging mode

The peak power spectral density (PPSD) was determined to be the highest level found across the emission in the reference bandwidth after 100 sweeps of power averaging (not video averaging).

A duty cycle correction factor was added to the measurement using the results of the formula of $10 \cdot \log(1/D)$ where D is the duty cycle.

MAXIMUM POWER SPECTRAL DENSITY




XMR 2015.01.14


EUT: Athena 4XC		Work Order: FOCU0211	
Serial Number: 02EA3100ACAE		Date: 05/05/16	
Customer: Summit Semiconductor LLC		Temperature: 23.9°C	
Attendees: Dave Schilling		Humidity: 40%	
Project: C2PC		Barometric Pres.: 1015.8	
Tested by: Jeff Alcock and Rod Peloquin		Power: 5.0 VDC	
Job Site: EV06			
TEST SPECIFICATIONS		Test Method	
FCC 15.407:2016		ANSI C63.10:2013	
COMMENTS			
Testing performed on Antenna Port 1 - U.FL			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		Power (dBm/MHz)	Duty Cycle Factor (dB)
		Density (dBm/MHz)	Limit ≤ (dBm / Ref BW)
			Results
5725 - 5785 MHz Band			
Low Channel, Ch 149 - 5745 MHz			
	802.11(a) 6 Mbps	-2.825	1.6
	802.11(a) 18 Mbps	-3.672	3
	802.11(a) 36 Mbps	-4.022	3.9
Mid Channel, Ch 157 - 5785 MHz			
	802.11(a) 6 Mbps	-3.108	1.6
	802.11(a) 18 Mbps	-3.956	3
	802.11(a) 36 Mbps	-4.151	3.9
High Channel, Ch 165 - 5825 MHz			
	802.11(a) 6 Mbps	-3.406	1.7
	802.11(a) 18 Mbps	-3.86	3
	802.11(a) 36 Mbps	-4.561	3.8

MAXIMUM POWER SPECTRAL DENSITY

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 6 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-2.825	1.6	-1.3	30	Pass		

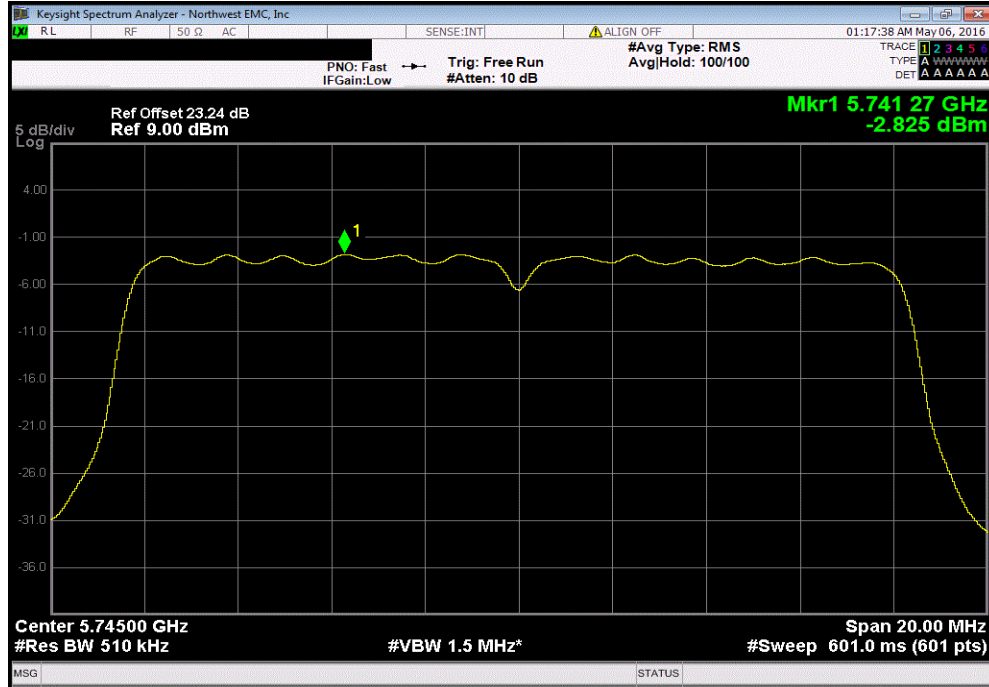


5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 18 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-3.672	3	-0.7	30	Pass		

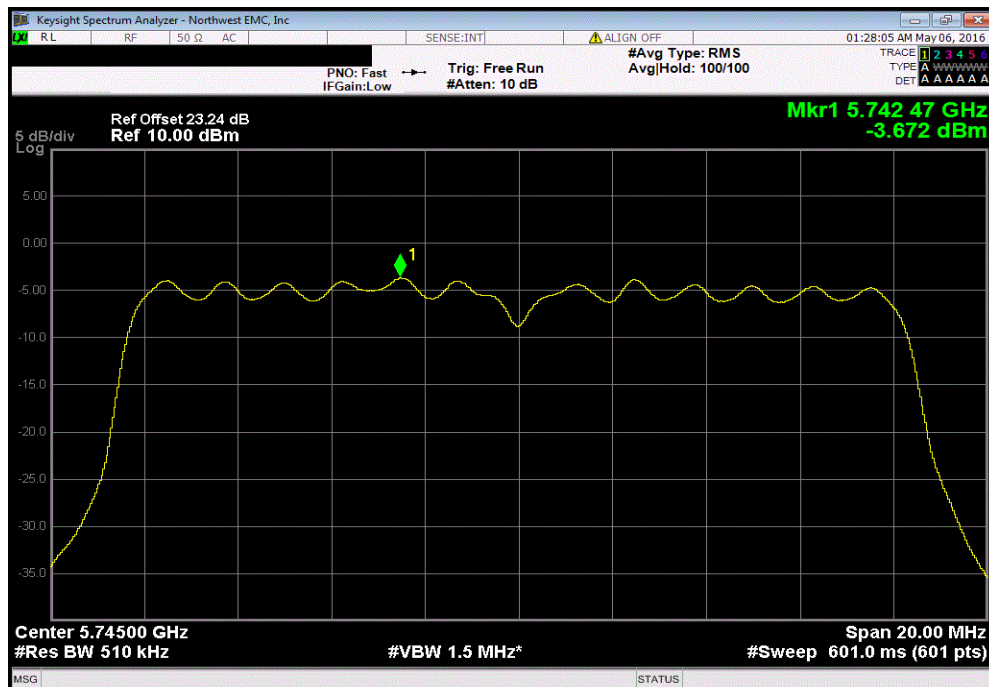


MAXIMUM POWER SPECTRAL DENSITY

5725 - 5785 MHz Band, Low Channel, Ch 149 - 5745 MHz, 802.11(a) 36 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-4.022	3.9	-0.2	30	Pass		

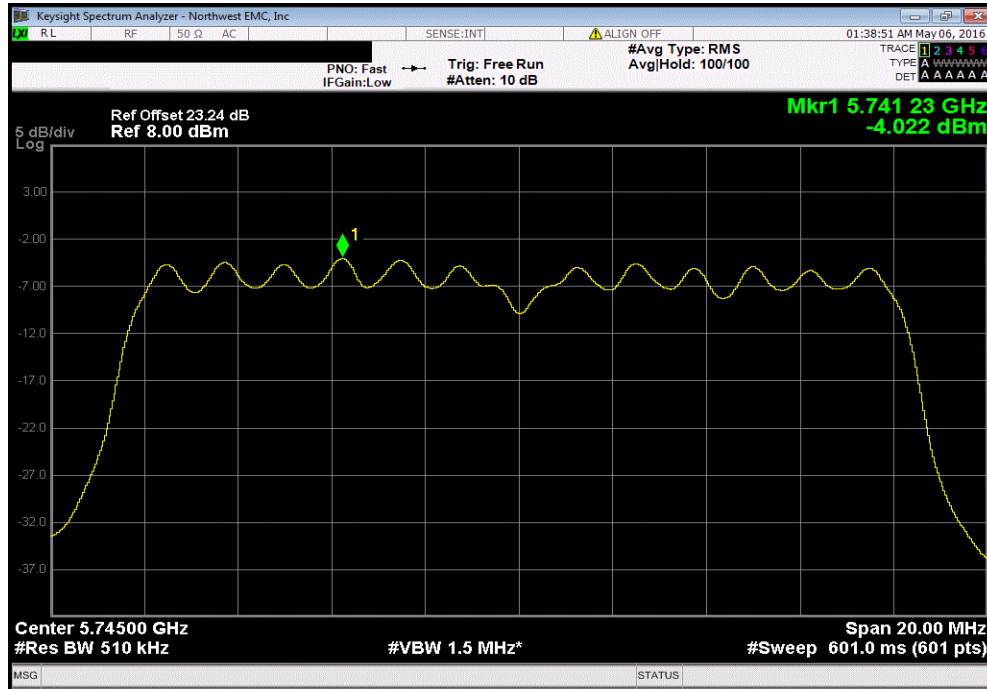


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 6 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-3.108	1.6	-1.5	30	Pass		

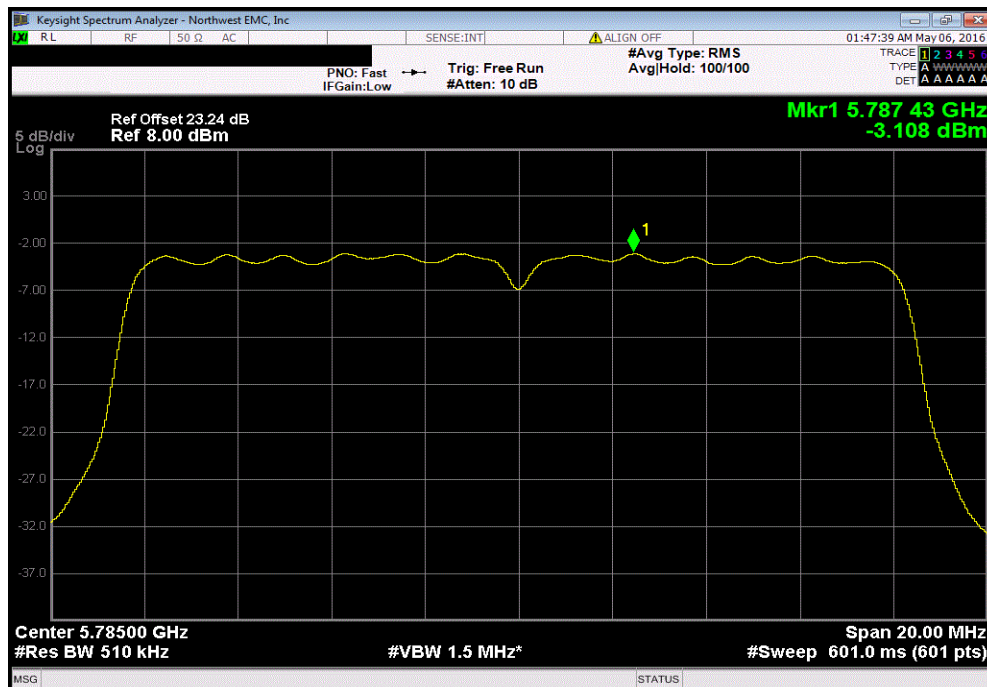


MAXIMUM POWER SPECTRAL DENSITY

5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 18 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-3.956	3	-1	30	Pass		

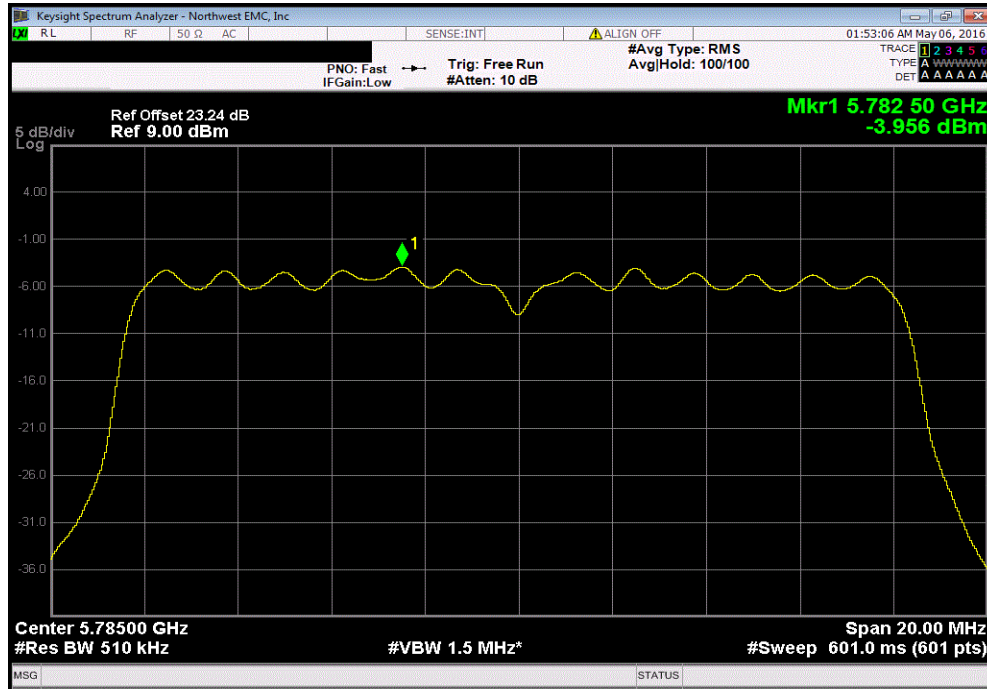


5725 - 5785 MHz Band, Mid Channel, Ch 157 - 5785 MHz, 802.11(a) 36 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-4.151	3.9	-0.3	30	Pass		

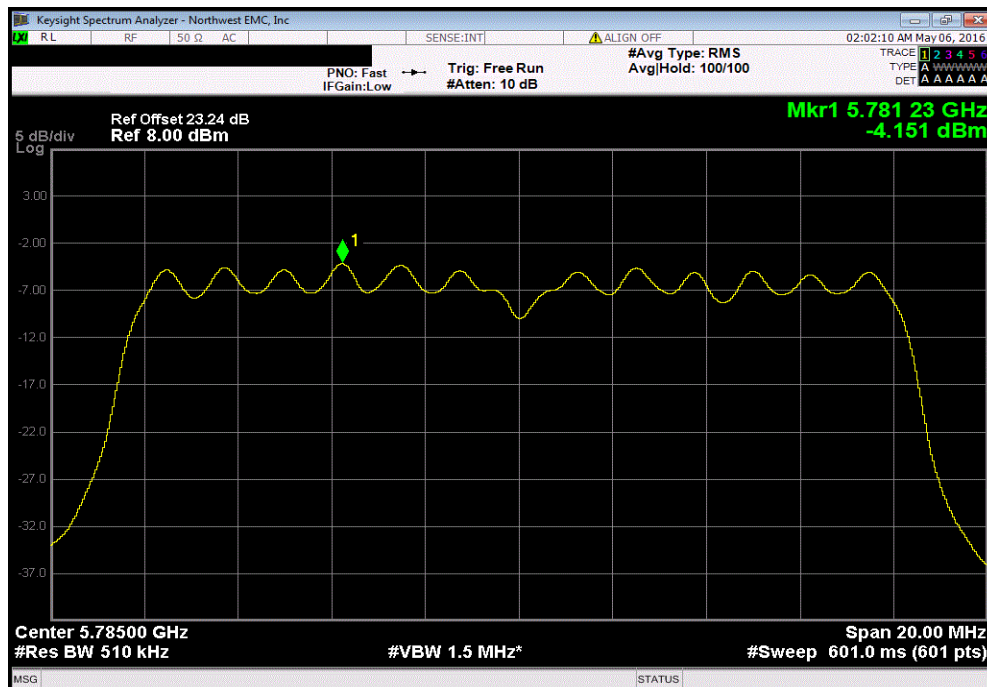


MAXIMUM POWER SPECTRAL DENSITY

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 6 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-3.406	1.7	-1.7	30	Pass		

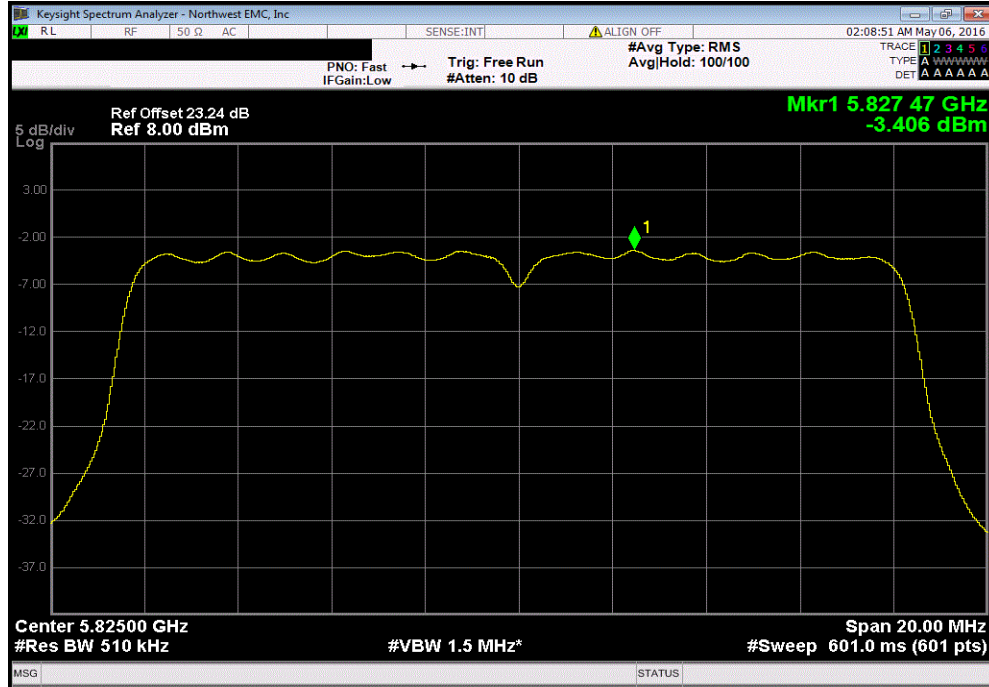

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 18 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ε (dBm / Ref BW)	Results		
-3.86	3	-0.9	30	Pass		

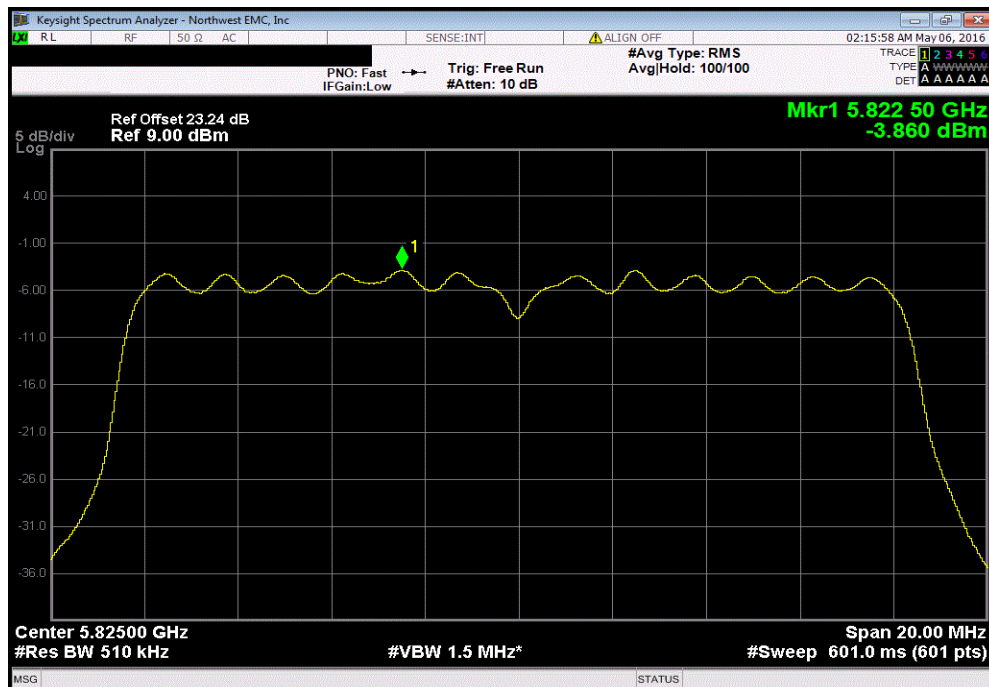

MAXIMUM POWER SPECTRAL DENSITY

5725 - 5785 MHz Band, High Channel, Ch 165 - 5825 MHz, 802.11(a) 36 Mbps						
Power (dBm/MHz)	Duty Cycle Factor (dB)	Density (dBm/MHz)	Limit ± (dBm / Ref BW)	Results		
-4.561	3.8	-0.7	30	Pass		

