

NORTHWEST EMC


Awarepoint Corporation

BLET

FCC 15.247:2016

802.11bg SISO Radio

Report # AWAR0021.2

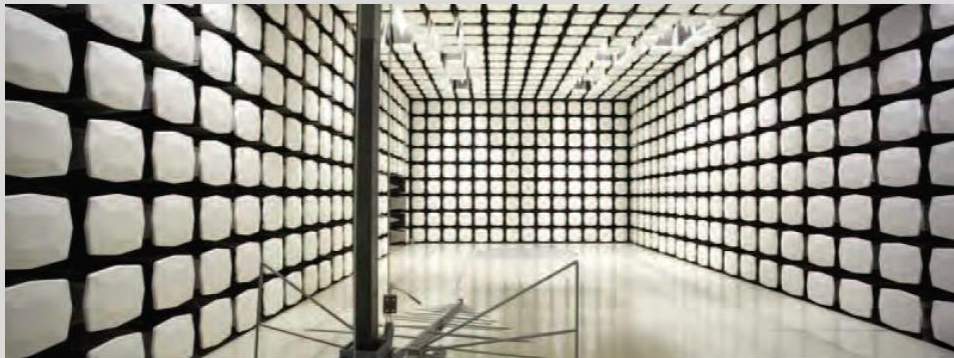

NVLAP Lab Code: 200676-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

CERTIFICATE OF TEST

Last Date of Test: August 9, 2016
Awarepoint Corporation
Model: BLET

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2016	ANSI C63.10:2013, KDB 558074


Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6, 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.2.2.4	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Victor Ratnoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number		Description	Date	Page Number
00		None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ($K=2$) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES

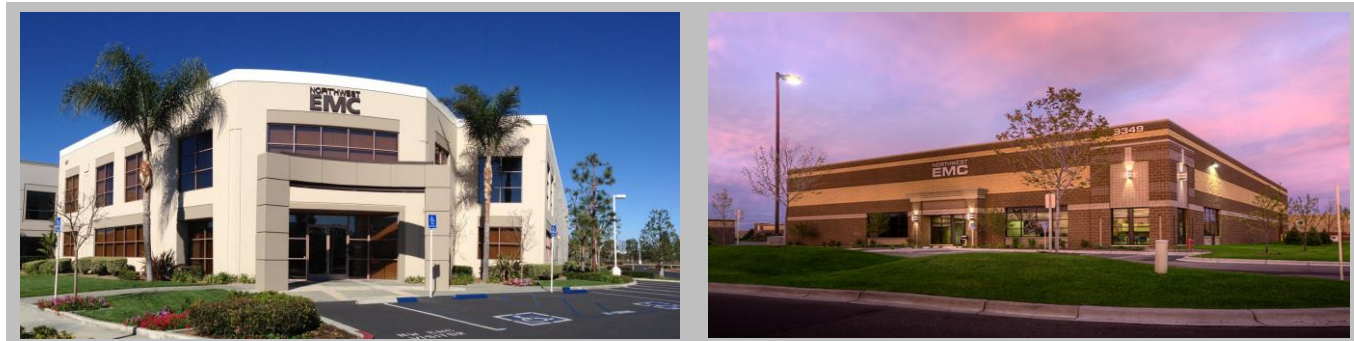


California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157




Test Setup Block Diagrams


Antenna Port Conducted Measurements

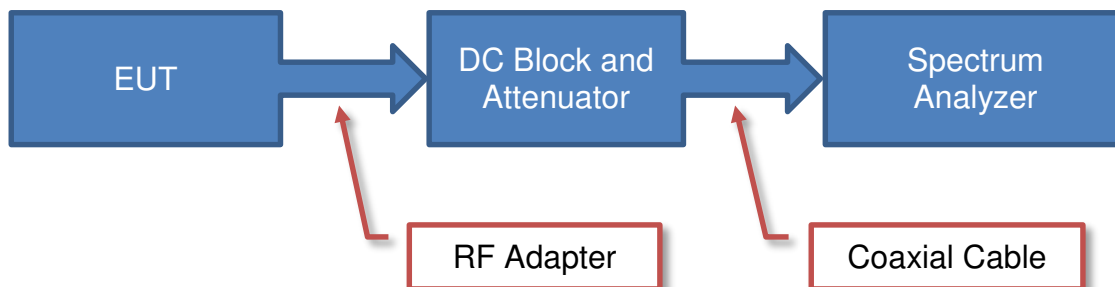

Near Field Test Fixture Measurements

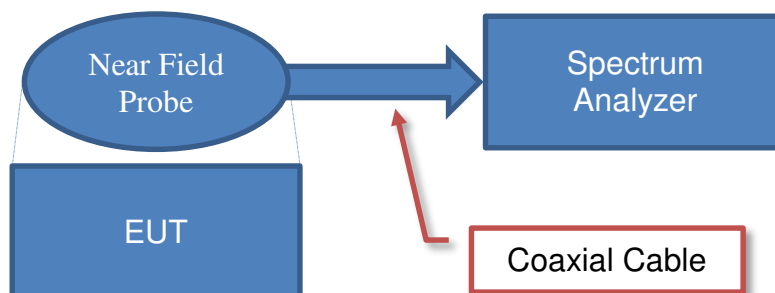

Spurious Radiated Emissions

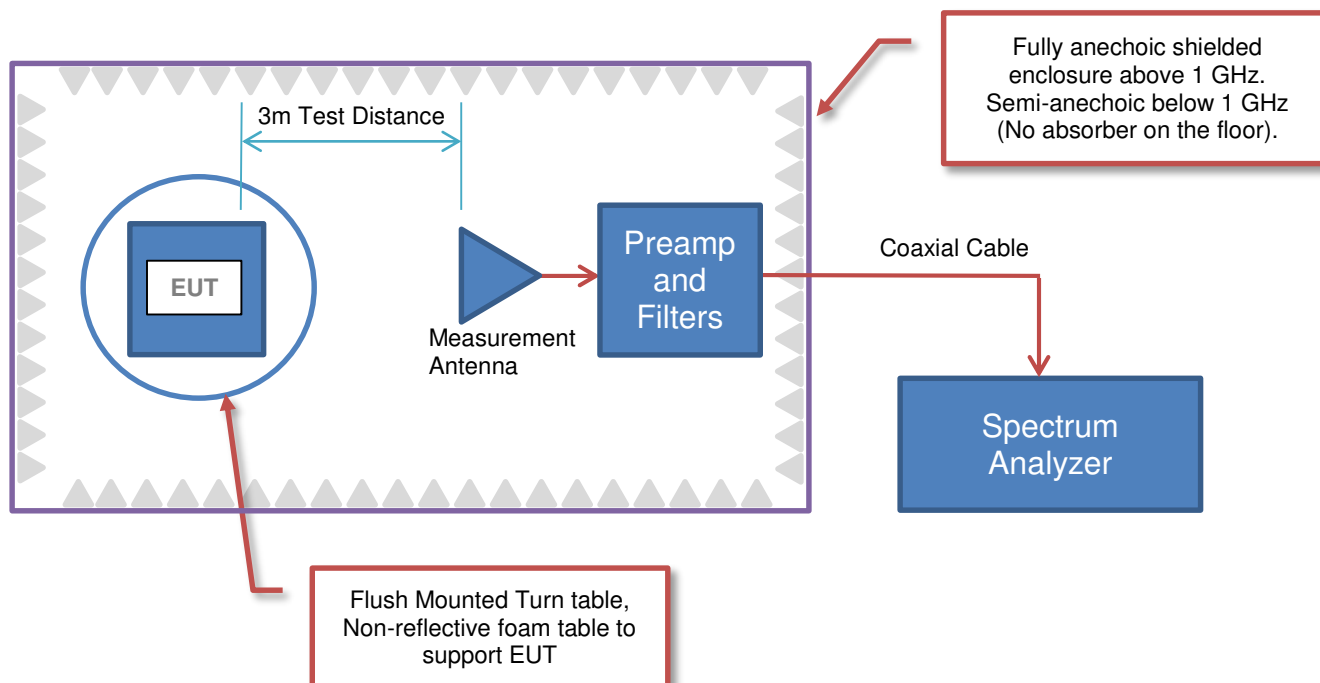

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Awarepoint Corporation
Address:	600 W. Broadway Suite 250
City, State, Zip:	San Diego, CA 92101
Test Requested By:	John Taylor
Model:	BLET
First Date of Test:	July 25, 2016
Last Date of Test:	August 09, 2016
Receipt Date of Samples:	July 25, 2016
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
BLET (BLE Tag): Primarily a Bluetooth Low Energy scanner (Receiver) that measures RSSI of BLE beacons and then periodically connects with a WiFi access point to transmit collected BLE scans for the purpose of location tracking or for configuration and firmware updates.
Testing Objective:
To demonstrate compliance of the 802.11bg SISO radio under FCC 15.247 for operation in the 2.4 GHz band.

CONFIGURATIONS

Configuration AWAR0021- 4

Software/Firmware Running during test	
Description	Version
RadioTool GUI	1.2.5942.19689

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
WiFi and Bluetooth Radio	Awarepoint Corporation	BLET	E358720

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Dell	VOSTRO 3550	FJRVLR1
AC/DC Power Supply	Dell	LA90PS0-00	CN-0DF266-71615-73O-0B34
WiFi Interface Board	Texas Instruments	CC3100BOOST	A8013723

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	.75m	No	AC mains	AC/DC Power Supply
DC Cable	No	1.5m	Yes	AC/DC Power Supply	Laptop
Ribbon Cable	No	0.1m	No	WiFi Interface Board	WiFi and Bluetooth Radio
Micro USB Cable	No	1.0m	No	WiFi Interface Board	Laptop

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	7/25/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	8/9/2016	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	8/9/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	8/9/2016	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	8/9/2016	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	8/9/2016	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	8/9/2016	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting 802.11bg at Low Channel 1(2412MHz), Mid Channel 6(2437MHz), and High Channel 11(2462MHz)

POWER SETTINGS INVESTIGATED

USB Powered

CONFIGURATIONS INVESTIGATED

AWAR0021 - 4

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26000 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - Low Pass	Micro-Tronics	LPM50004	LFC	11/3/2015	12 mo
Attenuator	Coaxicom	66702 3910AF-20	TKI	3/3/2016	12 mo
Cable	Northwest EMC	8-18GHz RE Cables	OCO	8/26/2015	12 mo
Cable	Northwest EMC	18-26GHz RE Cables	OCK	1/6/2016	12 mo
Cable	Northwest EMC	1-8GHz RE Cables	OCJ	8/26/2015	12 mo
Cable	Northwest EMC	10kHz-1GHz RE Cables	OCH	3/3/2016	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	HFM	2/9/2016	12 mo
Antenna - Biconilog	EMCO	3142B	AXK	10/6/2014	24 mo
Amplifier - Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	8/26/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079	AOO	3/3/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AOI	1/6/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AOF	8/31/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOE	8/31/2015	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHT	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHR	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHN	NCR	0 mo
Antenna - Double Ridge	EMCO	3115	AHB	3/21/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	2/9/2016	12 mo

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

SPURIOUS RADIATED EMISSIONS




PSA-ESCI 2016.04.26.1
EmiR5 2016.04.26.1

Work Order:	AWAR0021	Date:	07/25/16	
Project:	None	Temperature:	23.5 °C	
Job Site:	OC10	Humidity:	49.5% RH	
Serial Number:	E358720	Barometric Pres.:	1014 mbar	
Tested by:				Mark Baytan
EUT:	BLET			
Configuration:	4			
Customer:	Awarepoint Corporation			
Attendees:	None			
EUT Power:	USB Powered			
Operating Mode:	Transmitting 802.11bg at Low Channel 1(2412MHz) and High Channel 11(2462MHz)			
Deviations:	None			
Comments:	None			

Test Specifications	FCC 15.247:2016	Test Method	ANSI C63.10:2013
---------------------	-----------------	-------------	------------------

Run #	4	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

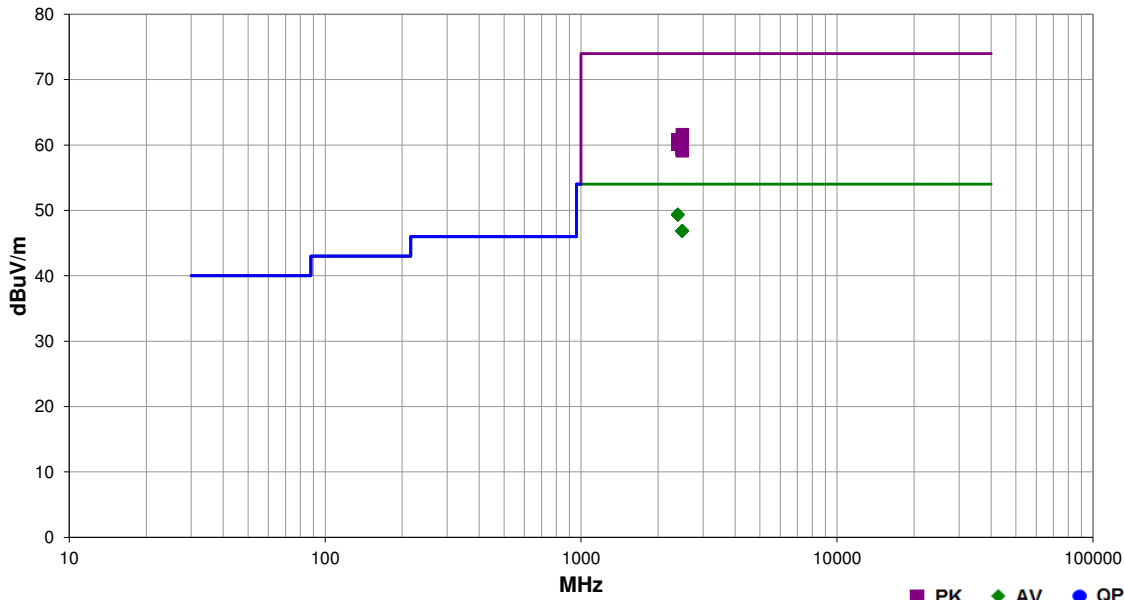

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2389.993	28.1	1.3	1.5	319.0	3.0	20.0	Horz	AV	0.0	49.4	54.0	-4.6	Low Ch 1, 1 Mbps, EUT Horz
2388.023	28.1	1.3	1.5	108.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	Low Ch 1, 1 Mbps, EUT Horz
2388.987	28.1	1.3	2.6	260.0	3.0	20.0	Vert	AV	0.0	49.4	54.0	-4.6	Low Ch 1, 54 Mbps, EUT Horz
2388.487	28.0	1.3	1.5	238.0	3.0	20.0	Horz	AV	0.0	49.3	54.0	-4.7	Low Ch 1, 6 Mbps, EUT Horz
2389.410	28.0	1.3	1.5	294.0	3.0	20.0	Vert	AV	0.0	49.3	54.0	-4.7	Low Ch 1, 6 Mbps, EUT Horz
2388.613	28.0	1.3	1.5	252.0	3.0	20.0	Horz	AV	0.0	49.3	54.0	-4.7	Low Ch 1, 36 Mbps, EUT Horz
2389.250	28.0	1.3	1.5	359.0	3.0	20.0	Vert	AV	0.0	49.3	54.0	-4.7	Low Ch 1, 36 Mbps, EUT Horz
2388.803	28.0	1.3	1.5	298.0	3.0	20.0	Horz	AV	0.0	49.3	54.0	-4.7	Low Ch 1, 54 Mbps, EUT Horz
2484.727	25.1	1.8	1.0	0.0	3.0	20.0	Horz	AV	0.0	46.9	54.0	-7.1	High Ch 11, 6 Mbps, EUT Horz
2485.437	25.1	1.8	1.0	239.0	3.0	20.0	Vert	AV	0.0	46.9	54.0	-7.1	High Ch 11, 6 Mbps, EUT Horz
2484.493	25.1	1.8	1.0	120.0	3.0	20.0	Horz	AV	0.0	46.9	54.0	-7.1	High Ch 11, 6 Mbps, EUT Vert
2483.700	25.1	1.8	1.0	217.0	3.0	20.0	Vert	AV	0.0	46.9	54.0	-7.1	High Ch 11, 6 Mbps, EUT Vert
2484.903	25.1	1.8	1.0	24.0	3.0	20.0	Horz	AV	0.0	46.9	54.0	-7.1	High Ch 11, 6 Mbps, EUT on Side
2485.433	25.1	1.8	1.0	176.0	3.0	20.0	Vert	AV	0.0	46.9	54.0	-7.1	High Ch 11, 6 Mbps, EUT on Side
2483.663	25.0	1.8	1.0	0.0	3.0	20.0	Horz	AV	0.0	46.8	54.0	-7.2	High Ch 11, 1 Mbps, EUT Horz
2485.317	25.0	1.8	1.0	239.0	3.0	20.0	Vert	AV	0.0	46.8	54.0	-7.2	High Ch 11, 1 Mbps, EUT Horz
2485.490	25.0	1.8	1.0	239.0	3.0	20.0	Vert	AV	0.0	46.8	54.0	-7.2	High Ch 11, 11 Mbps, EUT Horz
2485.347	25.0	1.8	1.0	239.0	3.0	20.0	Vert	AV	0.0	46.8	54.0	-7.2	High Ch 11, 36 Mbps, EUT Horz
2485.033	25.0	1.8	1.0	239.0	3.0	20.0	Vert	AV	0.0	46.8	54.0	-7.2	High Ch 11, 54 Mbps, EUT Horz
2485.197	25.0	1.8	1.0	0.0	3.0	20.0	Horz	AV	0.0	46.8	54.0	-7.2	High Ch 11, 11 Mbps, EUT Horz
2484.553	25.0	1.8	1.0	0.0	3.0	20.0	Horz	AV	0.0	46.8	54.0	-7.2	High Ch 11, 36 Mbps, EUT Horz
2485.357	25.0	1.8	1.0	0.0	3.0	20.0	Horz	AV	0.0	46.8	54.0	-7.2	High Ch 11, 54 Mbps, EUT Horz
2485.040	39.8	1.8	1.0	0.0	3.0	20.0	Horz	PK	0.0	61.6	74.0	-12.4	High Ch 11, 6 Mbps, EUT Horz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2389.817	39.5	1.3	1.5	319.0	3.0	20.0	Horz	PK	0.0	60.8	74.0	-13.2	Low Ch 1, 1 Mbps, EUT Horz
2389.030	39.5	1.3	1.5	238.0	3.0	20.0	Horz	PK	0.0	60.8	74.0	-13.2	Low Ch 1, 6 Mbps, EUT Horz
2389.173	39.3	1.3	1.5	252.0	3.0	20.0	Horz	PK	0.0	60.6	74.0	-13.4	Low Ch 1, 36 Mbps, EUT Horz
2388.983	39.3	1.3	1.5	298.0	3.0	20.0	Horz	PK	0.0	60.6	74.0	-13.4	Low Ch 1, 54 Mbps, EUT Horz
2389.123	39.3	1.3	2.6	260.0	3.0	20.0	Vert	PK	0.0	60.6	74.0	-13.4	Low Ch 1, 54 Mbps, EUT Horz
2485.140	38.6	1.8	1.0	239.0	3.0	20.0	Vert	PK	0.0	60.4	74.0	-13.6	High Ch 11, 54 Mbps, EUT Horz
2388.763	39.0	1.3	1.5	359.0	3.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	Low Ch 1, 36 Mbps, EUT Horz
2389.797	38.9	1.3	1.5	294.0	3.0	20.0	Vert	PK	0.0	60.2	74.0	-13.8	Low Ch 1, 6 Mbps, EUT Horz
2483.870	38.3	1.8	1.0	120.0	3.0	20.0	Horz	PK	0.0	60.1	74.0	-13.9	High Ch 11, 6 Mbps, EUT Vert
2484.837	38.3	1.8	1.0	24.0	3.0	20.0	Horz	PK	0.0	60.1	74.0	-13.9	High Ch 11, 6 Mbps, EUT on Side
2485.013	38.3	1.8	1.0	0.0	3.0	20.0	Horz	PK	0.0	60.1	74.0	-13.9	High Ch 11, 1 Mbps, EUT Horz
2484.753	38.3	1.8	1.0	239.0	3.0	20.0	Vert	PK	0.0	60.1	74.0	-13.9	High Ch 11, 11 Mbps, EUT Horz
2389.437	38.8	1.3	1.5	108.0	3.0	20.0	Vert	PK	0.0	60.1	74.0	-13.9	Low Ch 1, 1 Mbps, EUT Horz
2484.813	38.1	1.8	1.0	239.0	3.0	20.0	Vert	PK	0.0	59.9	74.0	-14.1	High Ch 11, 6 Mbps, EUT Horz
2484.507	38.0	1.8	1.0	176.0	3.0	20.0	Vert	PK	0.0	59.8	74.0	-14.2	High Ch 11, 6 Mbps, EUT on Side
2483.953	37.8	1.8	1.0	217.0	3.0	20.0	Vert	PK	0.0	59.6	74.0	-14.4	High Ch 11, 6 Mbps, EUT Vert
2485.290	37.7	1.8	1.0	239.0	3.0	20.0	Vert	PK	0.0	59.5	74.0	-14.5	High Ch 11, 1 Mbps, EUT Horz
2483.587	37.7	1.8	1.0	0.0	3.0	20.0	Horz	PK	0.0	59.5	74.0	-14.5	High Ch 11, 36 Mbps, EUT Horz
2484.393	37.6	1.8	1.0	0.0	3.0	20.0	Horz	PK	0.0	59.4	74.0	-14.6	High Ch 11, 11 Mbps, EUT Horz
2485.350	37.5	1.8	1.0	239.0	3.0	20.0	Vert	PK	0.0	59.3	74.0	-14.7	High Ch 11, 36 Mbps, EUT Horz
2484.330	37.3	1.8	1.0	0.0	3.0	20.0	Horz	PK	0.0	59.1	74.0	-14.9	High Ch 11, 54 Mbps, EUT Horz

SPURIOUS RADIATED EMISSIONS




PSA-ESCI 2016.04.26.1
EmiR5 2016.04.26.1

Work Order:	AWAR0021	Date:	07/25/16	
Project:	None	Temperature:	23.5 °C	
Job Site:	OC10	Humidity:	49.5% RH	
Serial Number:	E358720	Barometric Pres.:	1014 mbar	
Tested by: Mark Baytan				
EUT:	BLET			
Configuration:	4			
Customer:	Awarepoint Corporation			
Attendees:	None			
EUT Power:	USB Powered			
Operating Mode:	Transmitting 802.11bg at Low Channel 1(2412MHz), Mid Channel 6(2437MHz), and High Channel 11(2462MHz)			
Deviations:	None			
Comments:	None			

Test Specifications	FCC 15.247:2016	Test Method	ANSI C63.10:2013
---------------------	-----------------	-------------	------------------

Run #	9	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	---	-------------------	---	-------------------	-----------	---------	------

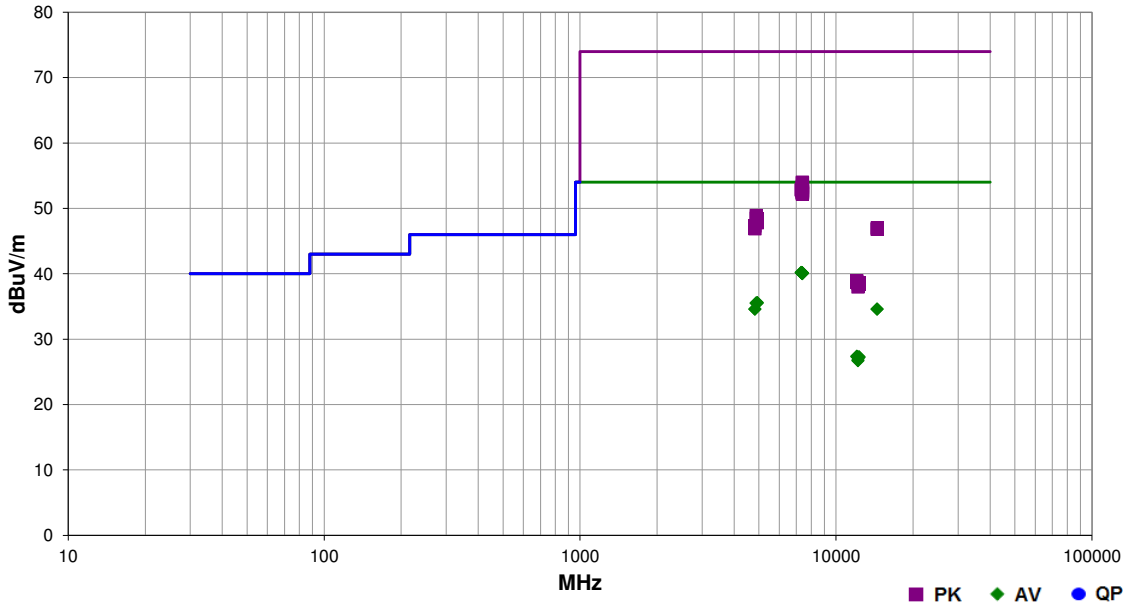

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7309.750	24.0	16.2	1.0	26.0	3.0	0.0	Horz	AV	0.0	40.2	54.0	-13.8	Mid Ch 6, 1 Mbps, EUT Vert
7311.925	24.0	16.2	1.0	254.0	3.0	0.0	Vert	AV	0.0	40.2	54.0	-13.8	Mid Ch 6, 1 Mbps, EUT Horz
7385.215	23.7	16.4	1.0	104.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT Horz
7385.965	23.7	16.4	1.0	126.0	3.0	0.0	Horz	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT Vert
7384.705	23.7	16.4	1.0	31.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT Vert
7385.170	23.7	16.4	2.6	66.0	3.0	0.0	Horz	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT on Side
7385.040	23.7	16.4	1.0	175.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT on Side
7385.700	23.7	16.4	1.0	104.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 11 Mbps, EUT Horz
7385.700	23.7	16.4	1.0	104.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 6 Mbps, EUT Horz
7385.415	23.7	16.4	1.0	104.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 36 Mbps, EUT Horz
7385.255	23.7	16.4	1.0	104.0	3.0	0.0	Vert	AV	0.0	40.1	54.0	-13.9	High Ch 11, 54 Mbps, EUT Horz
7384.930	23.7	16.4	1.0	126.0	3.0	0.0	Horz	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT Vert
7384.660	23.7	16.4	1.0	126.0	3.0	0.0	Horz	AV	0.0	40.1	54.0	-13.9	High Ch 11, 1 Mbps, EUT Vert
7384.810	23.7	16.4	1.0	126.0	3.0	0.0	Horz	AV	0.0	40.1	54.0	-13.9	High Ch 11, 36 Mbps, EUT Vert
7384.645	23.7	16.4	1.0	126.0	3.0	0.0	Horz	AV	0.0	40.1	54.0	-13.9	High Ch 11, 54 Mbps, EUT Vert
7384.920	23.6	16.4	1.0	289.0	3.0	0.0	Horz	AV	0.0	40.0	54.0	-14.0	High Ch 11, 1 Mbps, EUT Horz
4925.405	24.9	10.7	1.0	190.0	3.0	0.0	Vert	AV	0.0	35.6	54.0	-18.4	High Ch 11, 1 Mbps, EUT Horz
4925.500	24.8	10.7	1.3	68.0	3.0	0.0	Horz	AV	0.0	35.5	54.0	-18.5	High Ch 11, 1 Mbps, EUT Vert
4875.300	24.9	10.6	1.0	246.0	3.0	0.0	Horz	AV	0.0	35.5	54.0	-18.5	Mid Ch 6, 1 Mbps, EUT Vert
4875.495	24.9	10.6	1.0	359.0	3.0	0.0	Vert	AV	0.0	35.5	54.0	-18.5	Mid Ch 6, 1 Mbps, EUT Horz
4825.440	24.1	10.5	1.0	155.0	3.0	0.0	Horz	AV	0.0	34.6	54.0	-19.4	Low Ch 1, 1 Mbps, EUT Vert
4825.395	24.1	10.5	1.0	74.0	3.0	0.0	Vert	AV	0.0	34.6	54.0	-19.4	Low Ch 1, 1 Mbps, EUT Horz
14470.980	28.0	6.6	1.5	18.0	3.0	0.0	Horz	AV	0.0	34.6	54.0	-19.4	Low Ch 1, 1Mbps, EUT Vert

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
14470.120	28.0	6.6	1.5	116.0	3.0	0.0	Vert	AV	0.0	34.6	54.0	-19.4	Low Ch 1, 1Mbps, EUT Horz
7385.690	37.6	16.4	1.0	104.0	3.0	0.0	Vert	PK	0.0	54.0	74.0	-20.0	High Ch 11, 11 Mbps, EUT Horz
7386.115	37.5	16.4	1.0	126.0	3.0	0.0	Horz	PK	0.0	53.9	74.0	-20.1	High Ch 11, 54 Mbps, EUT Vert
7387.300	37.0	16.4	1.0	104.0	3.0	0.0	Vert	PK	0.0	53.4	74.0	-20.6	High Ch 11, 6 Mbps, EUT Horz
7386.560	36.8	16.4	1.0	126.0	3.0	0.0	Horz	PK	0.0	53.2	74.0	-20.8	High Ch 11, 36 Mbps, EUT Vert
7384.660	36.7	16.4	1.0	104.0	3.0	0.0	Vert	PK	0.0	53.1	74.0	-20.9	High Ch 11, 54 Mbps, EUT Horz
7384.530	36.5	16.4	1.0	31.0	3.0	0.0	Vert	PK	0.0	52.9	74.0	-21.1	High Ch 11, 1 Mbps, EUT Vert
7312.225	36.7	16.2	1.0	26.0	3.0	0.0	Horz	PK	0.0	52.9	74.0	-21.1	Mid Ch 6, 1 Mbps, EUT Vert
7311.815	36.6	16.2	1.0	254.0	3.0	0.0	Vert	PK	0.0	52.8	74.0	-21.2	Mid Ch 6, 1 Mbps, EUT Horz
7384.760	36.3	16.4	1.0	126.0	3.0	0.0	Horz	PK	0.0	52.7	74.0	-21.3	High Ch 11, 6 Mbps, EUT Vert
7387.275	36.2	16.4	1.0	104.0	3.0	0.0	Vert	PK	0.0	52.6	74.0	-21.4	High Ch 11, 36 Mbps, EUT Horz
7385.160	36.2	16.4	1.0	126.0	3.0	0.0	Horz	PK	0.0	52.6	74.0	-21.4	High Ch 11, 11 Mbps, EUT Vert
7386.585	36.1	16.4	2.6	66.0	3.0	0.0	Horz	PK	0.0	52.5	74.0	-21.5	High Ch 11, 1 Mbps, EUT on Side
7386.475	36.0	16.4	1.0	289.0	3.0	0.0	Horz	PK	0.0	52.4	74.0	-21.6	High Ch 11, 1 Mbps, EUT Horz
7386.455	36.0	16.4	1.0	126.0	3.0	0.0	Horz	PK	0.0	52.4	74.0	-21.6	High Ch 11, 1 Mbps, EUT Vert
7385.805	35.9	16.4	1.0	175.0	3.0	0.0	Vert	PK	0.0	52.3	74.0	-21.7	High Ch 11, 1 Mbps, EUT on Side
7386.290	35.8	16.4	1.0	104.0	3.0	0.0	Vert	PK	0.0	52.2	74.0	-21.8	High Ch 11, 1 Mbps, EUT Horz
4874.010	38.3	10.6	1.0	359.0	3.0	0.0	Vert	PK	0.0	48.9	74.0	-25.1	Mid Ch 6, 1 Mbps, EUT Horz
4874.370	37.9	10.6	1.0	246.0	3.0	0.0	Horz	PK	0.0	48.5	74.0	-25.5	Mid Ch 6, 1 Mbps, EUT Vert
4924.600	37.7	10.7	1.3	68.0	3.0	0.0	Horz	PK	0.0	48.4	74.0	-25.6	High Ch 11, 1 Mbps, EUT Vert
4924.590	37.1	10.7	1.0	190.0	3.0	0.0	Vert	PK	0.0	47.8	74.0	-26.2	High Ch 11, 1 Mbps, EUT Horz
12058.540	35.7	-8.3	1.5	57.0	3.0	0.0	Horz	AV	0.0	27.4	54.0	-26.6	Low Ch 1, 1Mbps, EUT Vert
12307.990	35.2	-7.9	1.5	226.0	3.0	0.0	Vert	AV	0.0	27.3	54.0	-26.7	High Ch 11, 1 Mbps, EUT Horz
12059.660	35.6	-8.3	1.5	79.0	3.0	0.0	Vert	AV	0.0	27.3	54.0	-26.7	Low Ch 1, 1Mbps, EUT Horz
4823.730	36.8	10.5	1.0	155.0	3.0	0.0	Horz	PK	0.0	47.3	74.0	-26.7	Low Ch 1, 1 Mbps, EUT Vert
12308.240	35.1	-7.9	1.5	99.0	3.0	0.0	Horz	AV	0.0	27.2	54.0	-26.8	High Ch 11, 1 Mbps, EUT Vert
14469.690	40.4	6.6	1.5	18.0	3.0	0.0	Horz	PK	0.0	47.0	74.0	-27.0	Low Ch 1, 1Mbps, EUT Vert
4824.355	36.4	10.5	1.0	74.0	3.0	0.0	Vert	PK	0.0	46.9	74.0	-27.1	Low Ch 1, 1 Mbps, EUT Horz
12183.580	34.8	-8.0	1.5	19.0	3.0	0.0	Vert	AV	0.0	26.8	54.0	-27.2	Mid Ch 6, 1 Mbps, EUT Horz
14473.610	40.2	6.6	1.5	116.0	3.0	0.0	Vert	PK	0.0	46.8	74.0	-27.2	Low Ch 1, 1Mbps, EUT Horz
12183.560	34.7	-8.0	1.5	280.0	3.0	0.0	Horz	AV	0.0	26.7	54.0	-27.3	Mid Ch 6, 1 Mbps, EUT Vert
12057.630	47.2	-8.3	1.5	79.0	3.0	0.0	Vert	PK	0.0	38.9	74.0	-35.1	Low Ch 1, 1Mbps, EUT Horz
12059.720	47.0	-8.3	1.5	57.0	3.0	0.0	Horz	PK	0.0	38.7	74.0	-35.3	Low Ch 1, 1Mbps, EUT Vert
12312.060	46.5	-7.9	1.5	99.0	3.0	0.0	Horz	PK	0.0	38.6	74.0	-35.4	High Ch 11, 1 Mbps, EUT Vert
12183.980	46.5	-8.0	1.5	280.0	3.0	0.0	Horz	PK	0.0	38.5	74.0	-35.5	Mid Ch 6, 1 Mbps, EUT Vert
12308.160	46.3	-7.9	1.5	226.0	3.0	0.0	Vert	PK	0.0	38.4	74.0	-35.6	High Ch 11, 1 Mbps, EUT Horz
12184.670	46.0	-8.0	1.5	19.0	3.0	0.0	Vert	PK	0.0	38.0	74.0	-36.0	Mid Ch 6, 1 Mbps, EUT Horz

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.


There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.


If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = 0.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	4	Signature 	
		Pulse Width	Period
		Number of Pulses	Value (%)
		Limit (%)	Results
2400 MHz - 2483.5 MHz Band			
802.11(b) 1 Mbps			
	Low Channel 1, 2412 MHz	985.475 us	1.462 ms
	Low Channel 1, 2412 MHz	N/A	N/A
	Mid Channel 6, 2437 MHz	984.498 us	1.444 ms
	Mid Channel 6, 2437 MHz	N/A	N/A
	High Channel 11, 2462 MHz	981.568 us	1.425 ms
	High Channel 11, 2462 MHz	N/A	N/A
802.11(b) 11 Mbps			
	Low Channel 1, 2412 MHz	261.737 us	626.3 us
	Low Channel 1, 2412 MHz	N/A	N/A
	Mid Channel 6, 2437 MHz	259.828 us	617.5 us
	Mid Channel 6, 2437 MHz	N/A	N/A
	High Channel 11, 2462 MHz	261.682 us	518.1 us
	High Channel 11, 2462 MHz	N/A	N/A
802.11(g) 6 Mbps			
	Low Channel 1, 2412 MHz	147.647 us	265.368 us
	Low Channel 1, 2412 MHz	N/A	N/A
	Mid Channel 6, 2437 MHz	148.468 us	346.776 us
	Mid Channel 6, 2437 MHz	N/A	N/A
	High Channel 11, 2462 MHz	151.21 us	328.731 us
	High Channel 11, 2462 MHz	N/A	N/A
802.11(g) 36 Mbps			
	Low Channel 1, 2412 MHz	35.11 us	176.5 us
	Low Channel 1, 2412 MHz	N/A	N/A
	Mid Channel 6, 2437 MHz	35.354 us	203.077 us
	Mid Channel 6, 2437 MHz	N/A	N/A
	High Channel 11, 2462 MHz	35.31 us	149.416 us
	High Channel 11, 2462 MHz	N/A	N/A
802.11(g) 54 Mbps			
	Low Channel 1, 2412 MHz	27.11 us	200.671 us
	Low Channel 1, 2412 MHz	N/A	N/A
	Mid Channel 6, 2437 MHz	24.68 us	195.347 us
	Mid Channel 6, 2437 MHz	N/A	N/A
	High Channel 11, 2462 MHz	27.31 us	277.777 us
	High Channel 11, 2462 MHz	N/A	N/A

DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
985.475 us	1.462 ms	1	67.4	N/A	N/A	

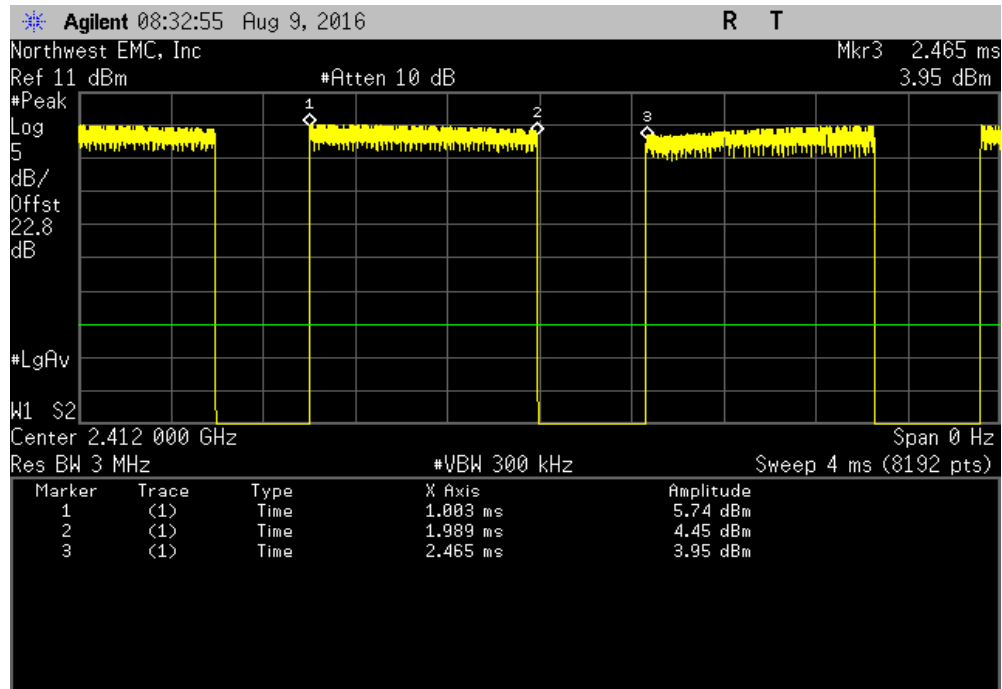


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

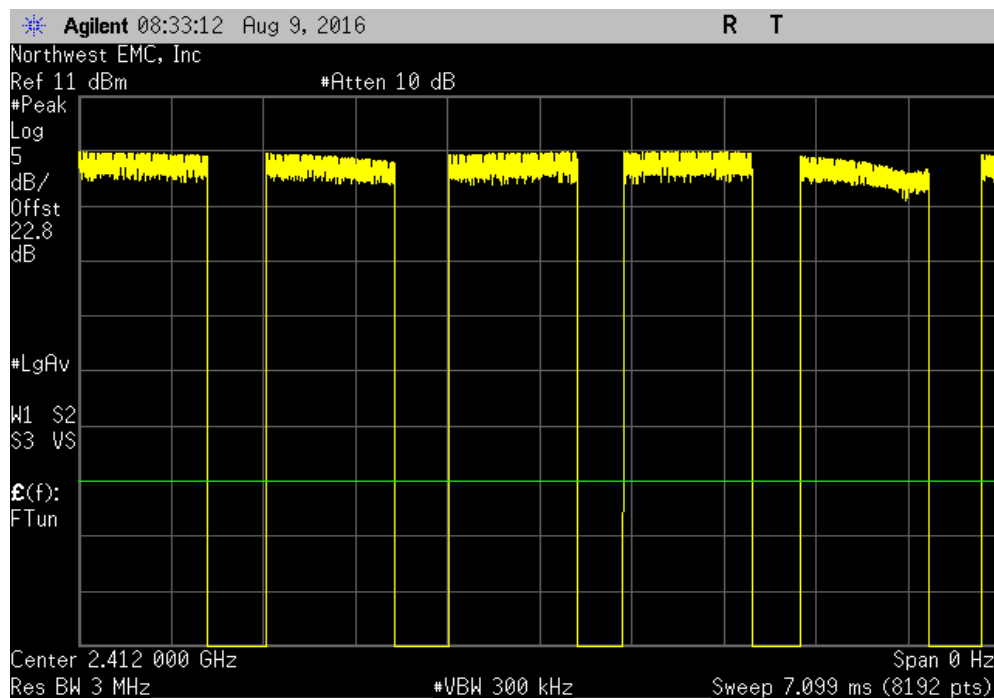


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
984.498 us	1.444 ms	1	68.2	N/A	N/A	

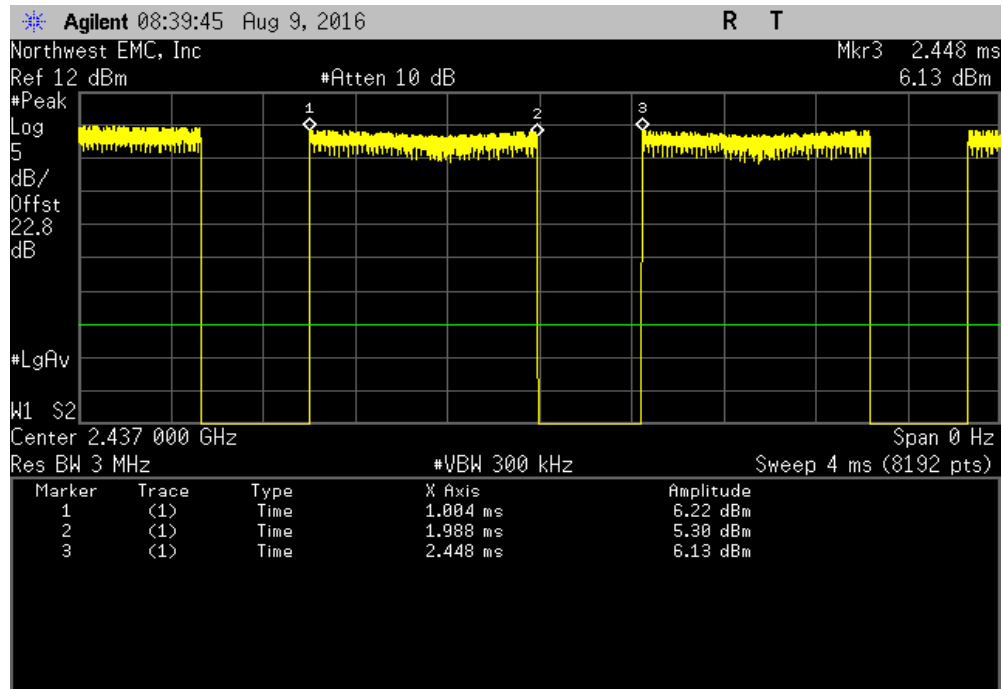


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

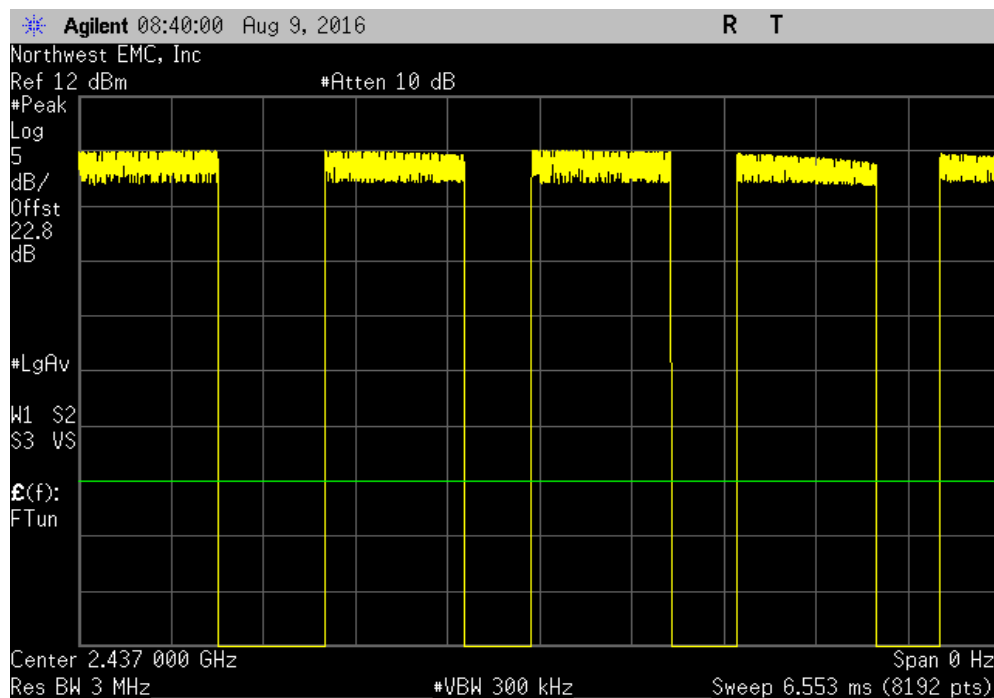


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
981.568 us	1.425 ms	1	68.9	N/A	N/A	

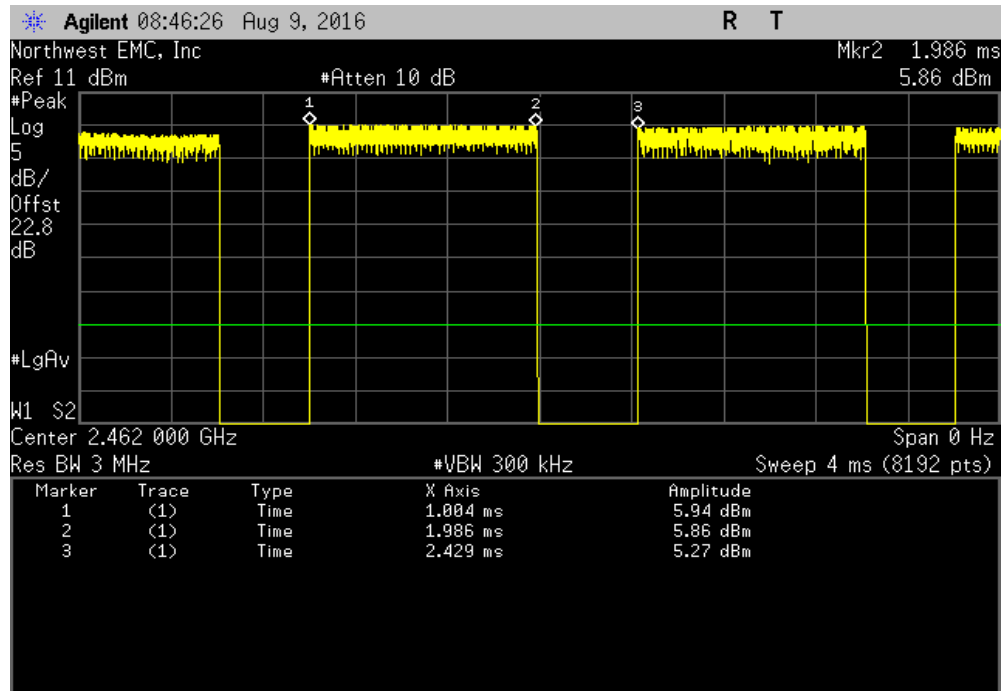


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

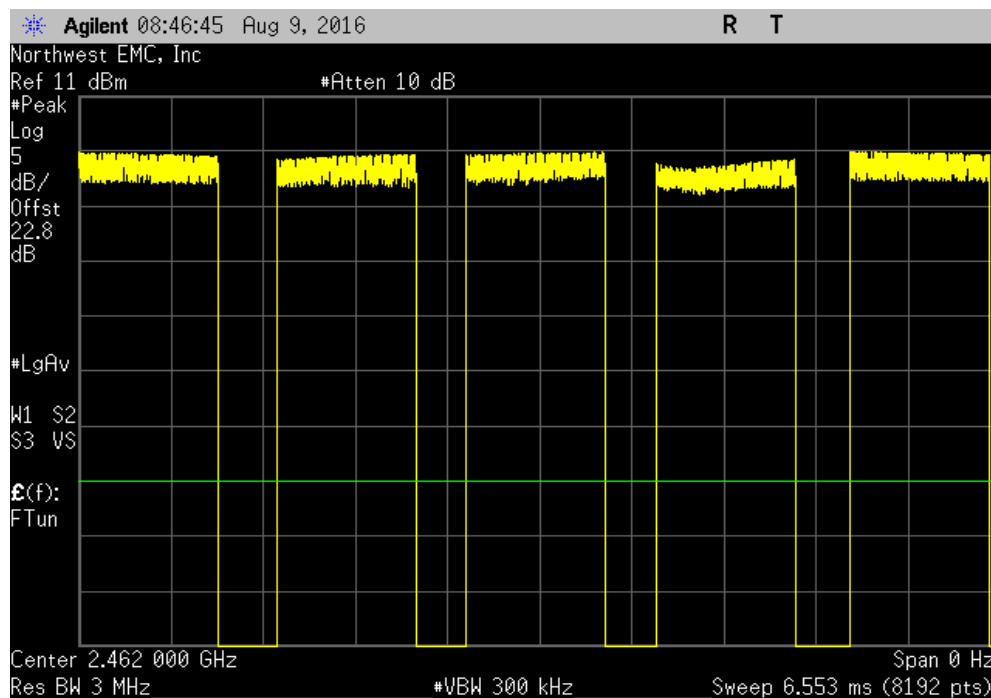


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
261.737 us	626.3 us	1	41.8	N/A	N/A	

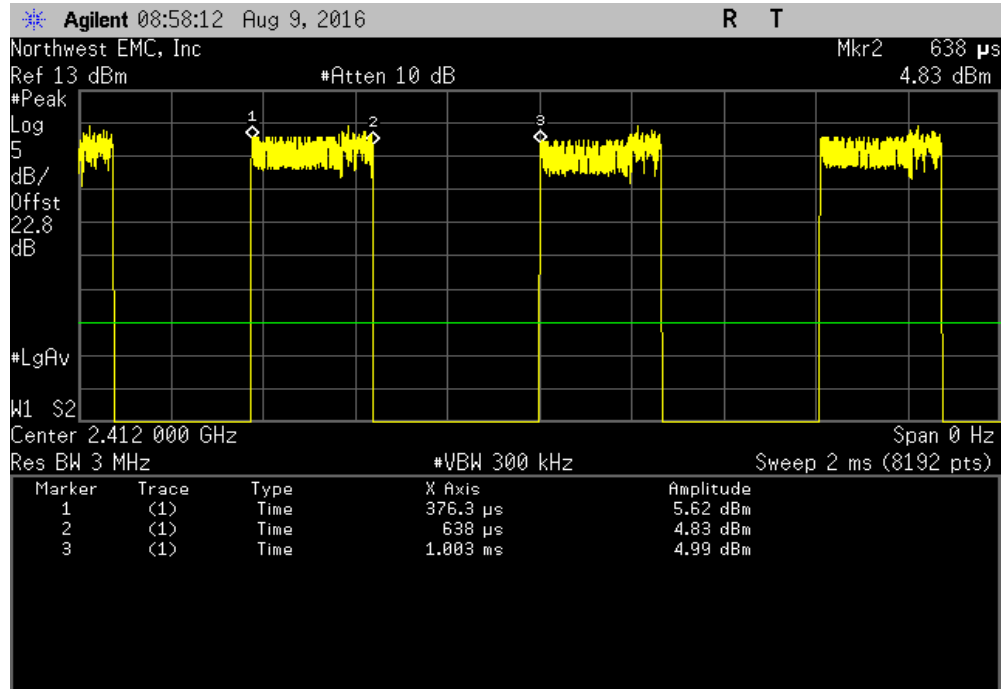


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

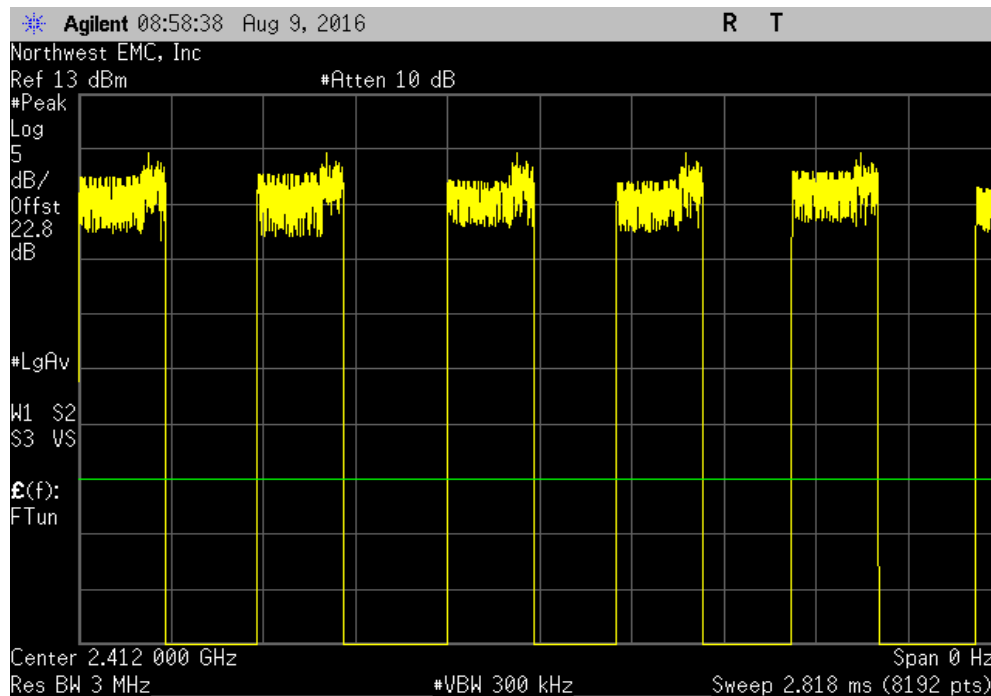


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
259.828 us	617.5 us	1	42.1	N/A	N/A	

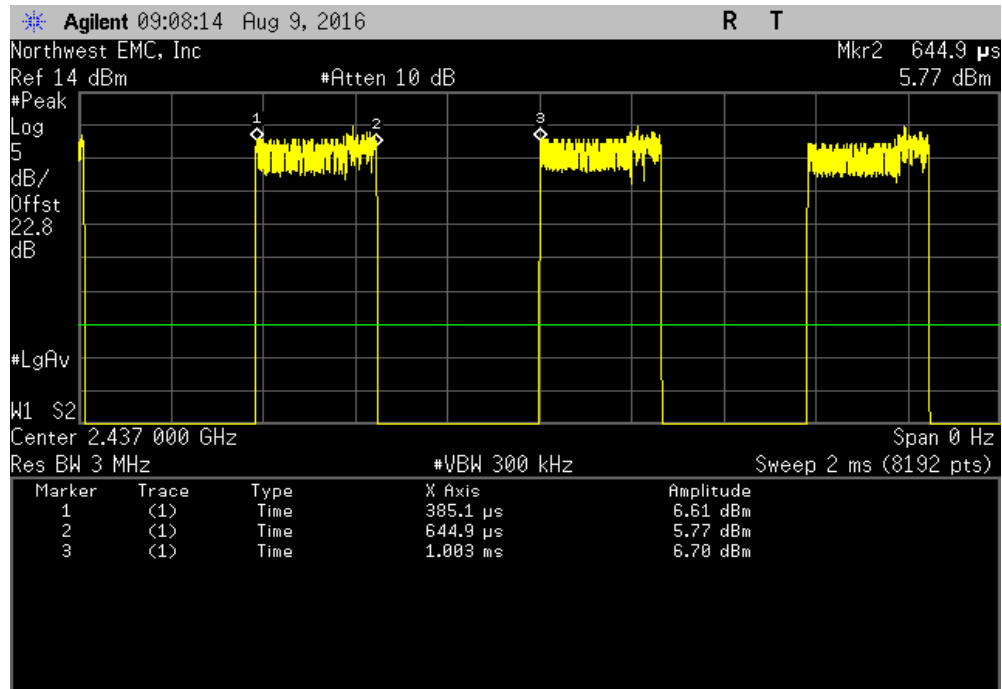


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

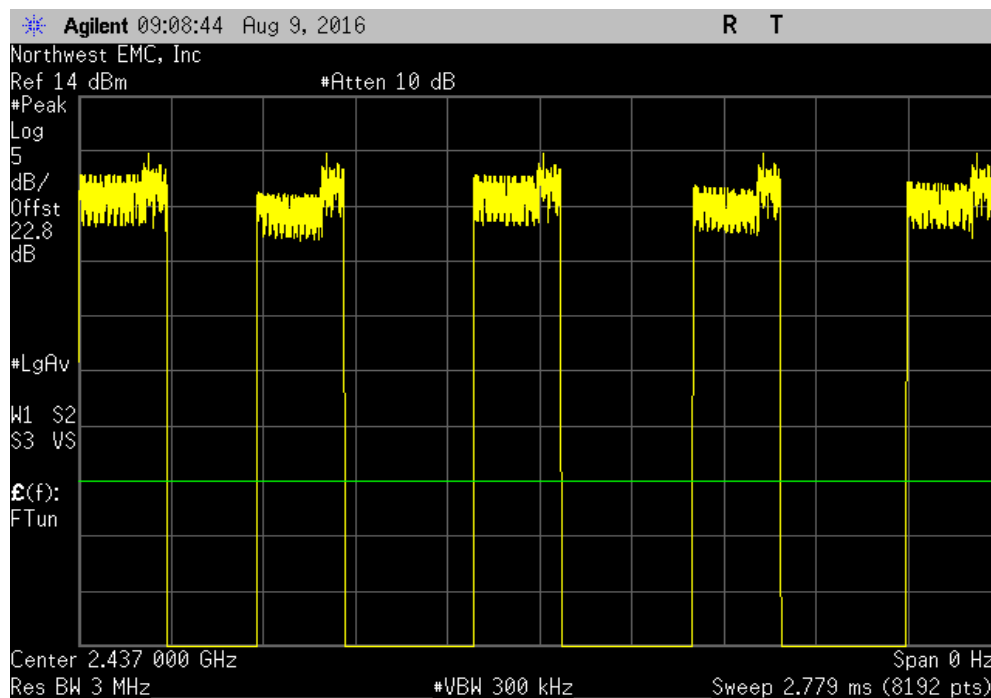


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
261.682 us	518.1 us	1	50.5	N/A	N/A	

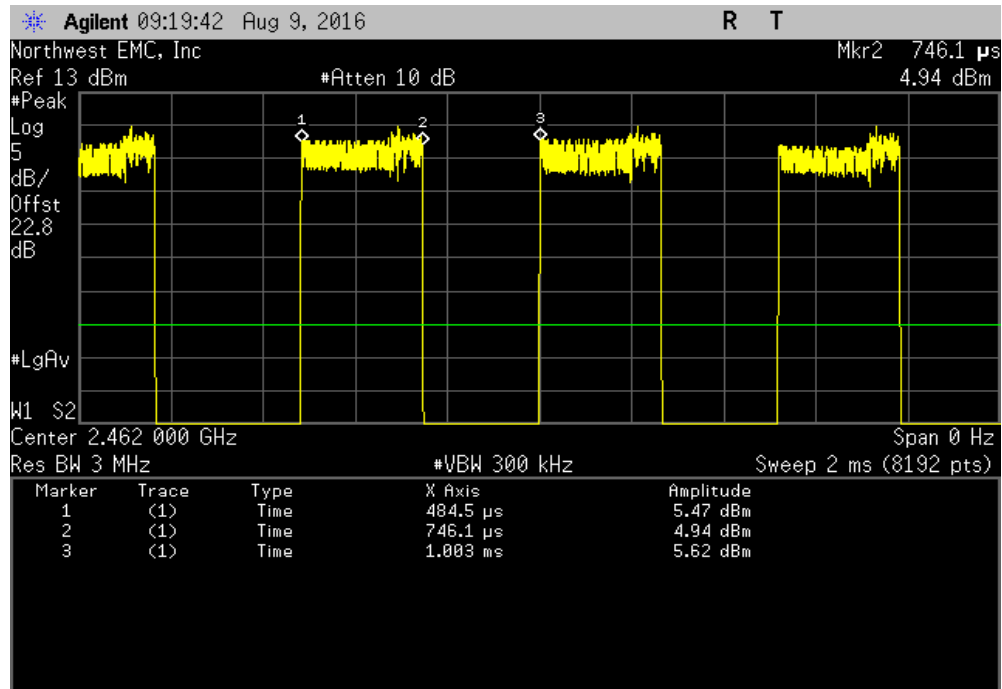


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

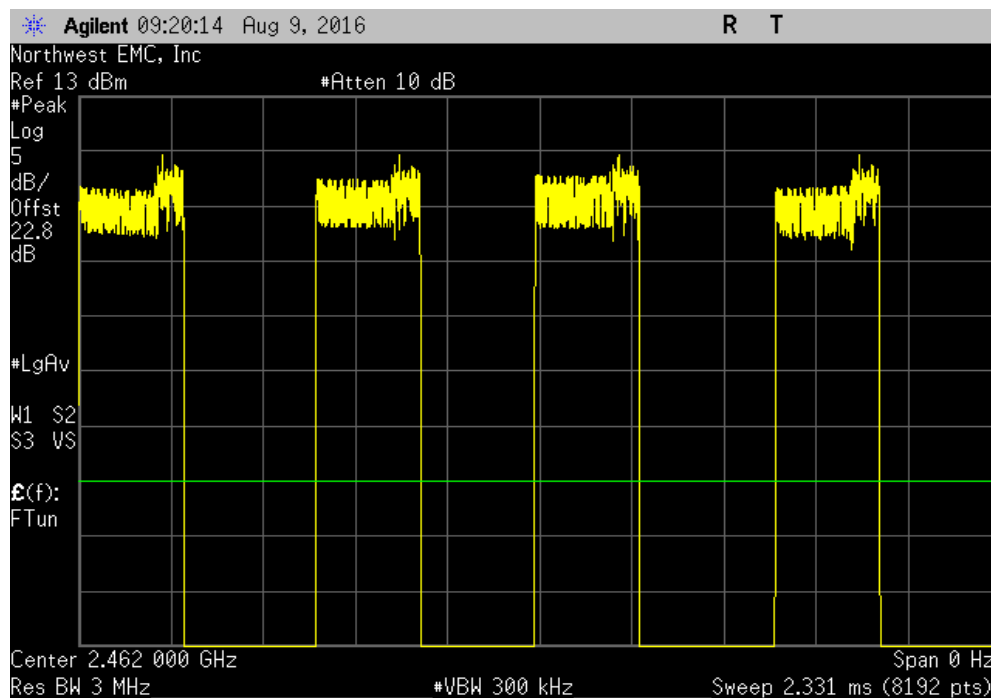


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
147.647 us	265.368 us	1	55.6	N/A	N/A	

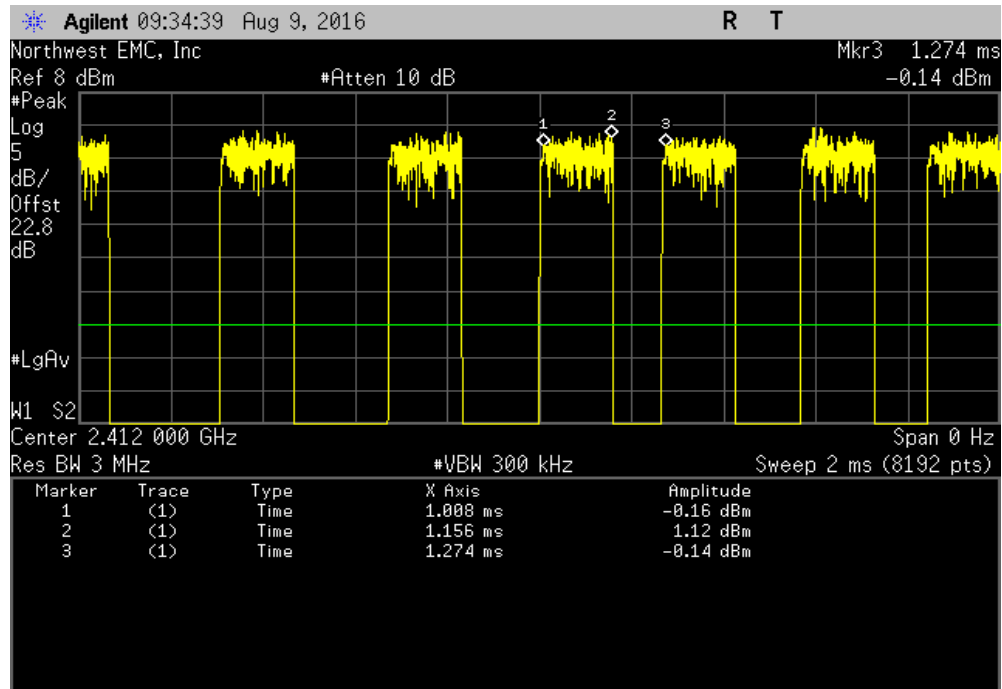


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	4	N/A	N/A	N/A	

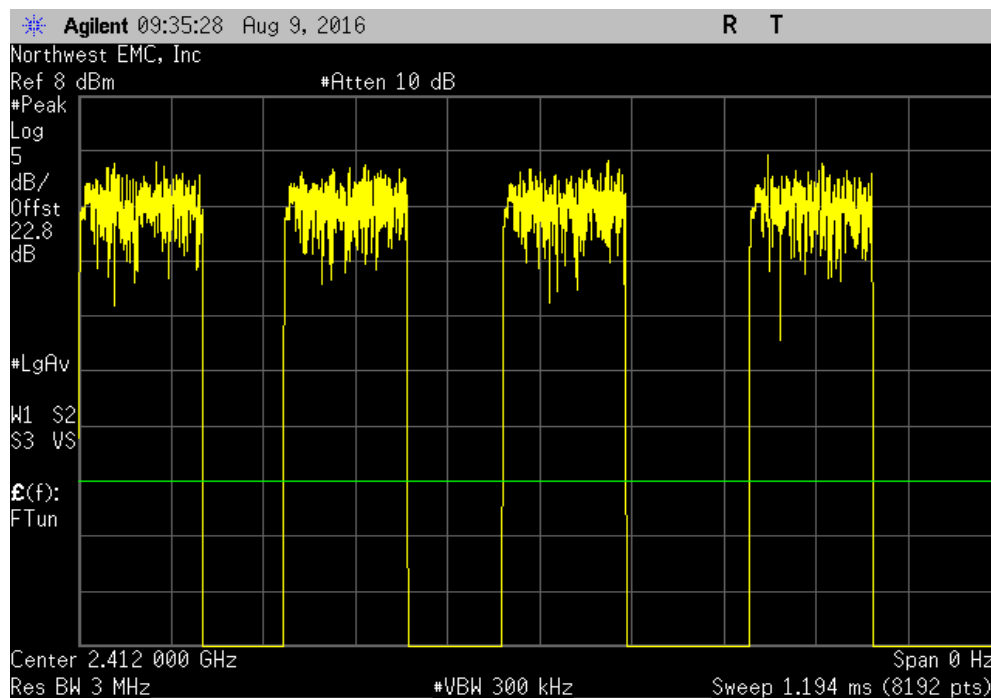


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
148.468 us	346.776 us	1	42.8	N/A	N/A	

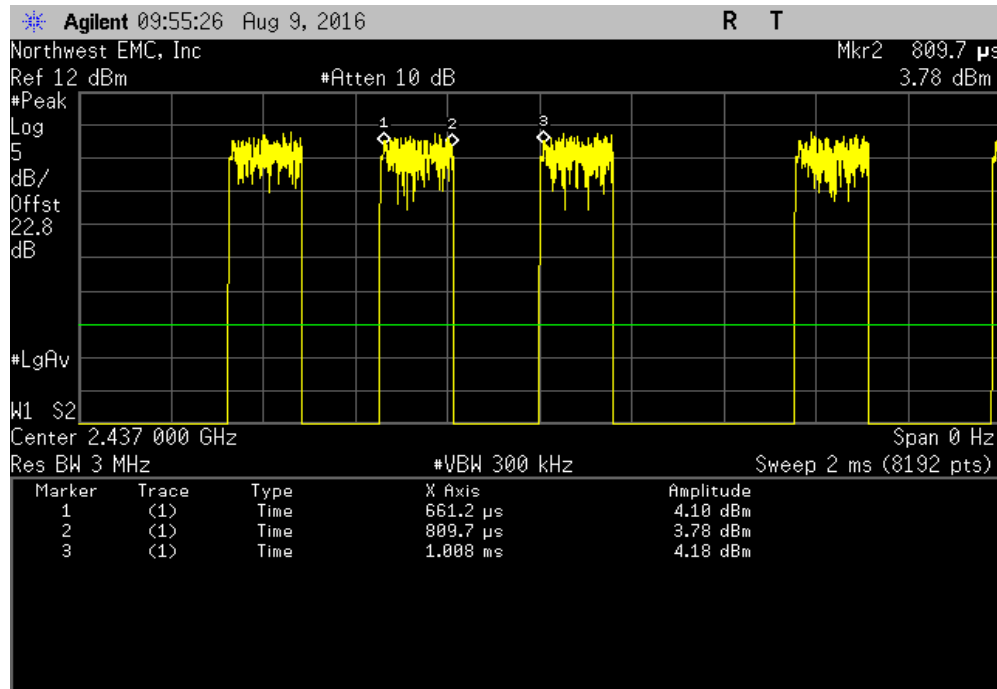


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	4	N/A	N/A	N/A	

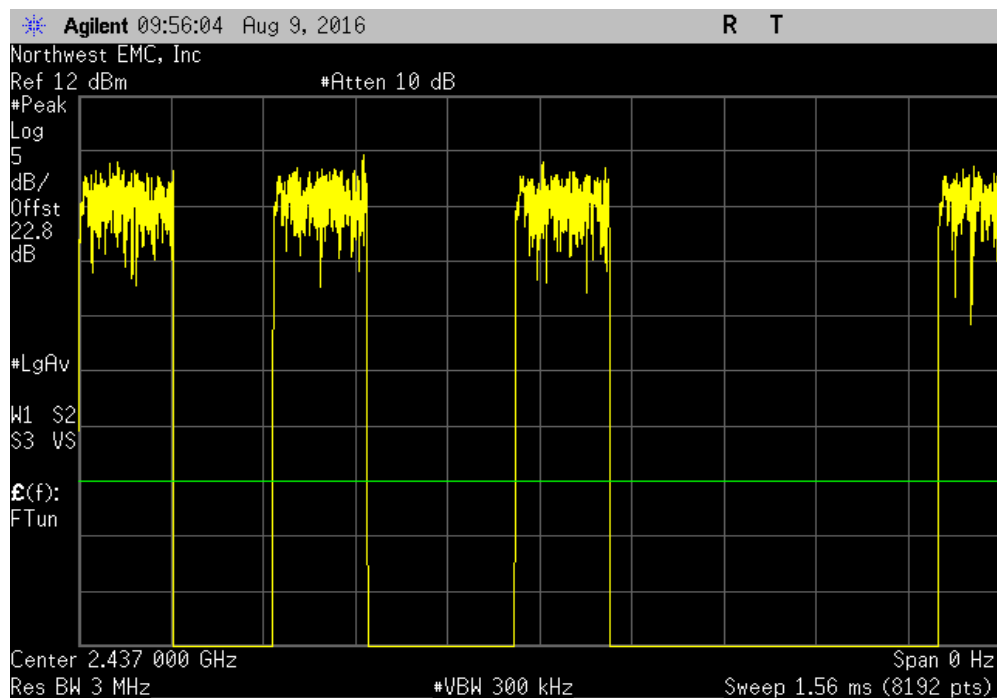


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
151.21 us	328.731 us	1	46	N/A	N/A	

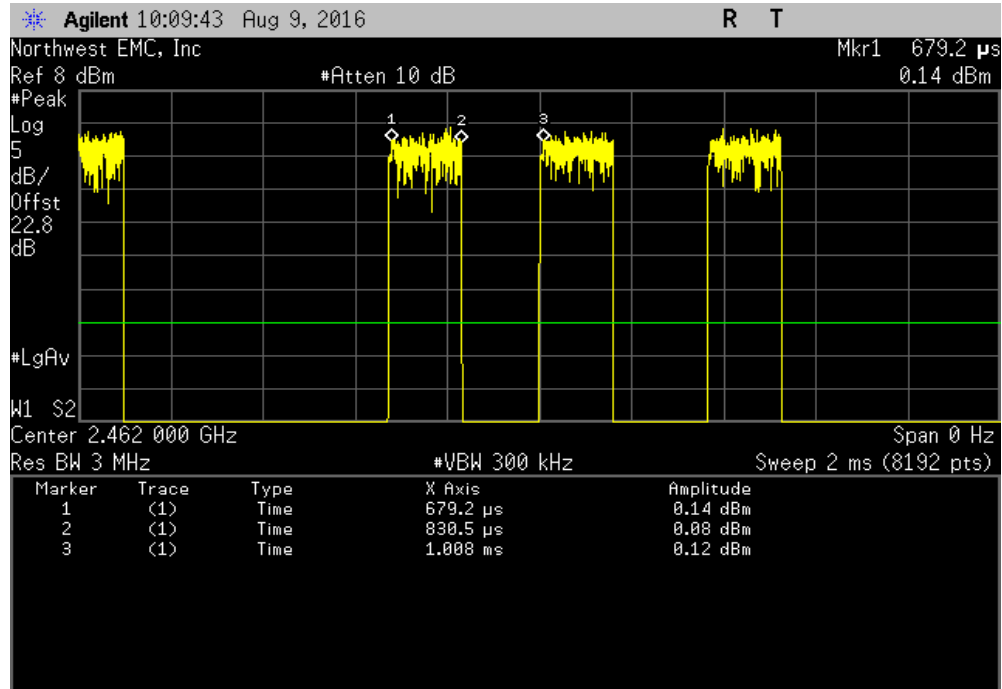


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	4	N/A	N/A	N/A	

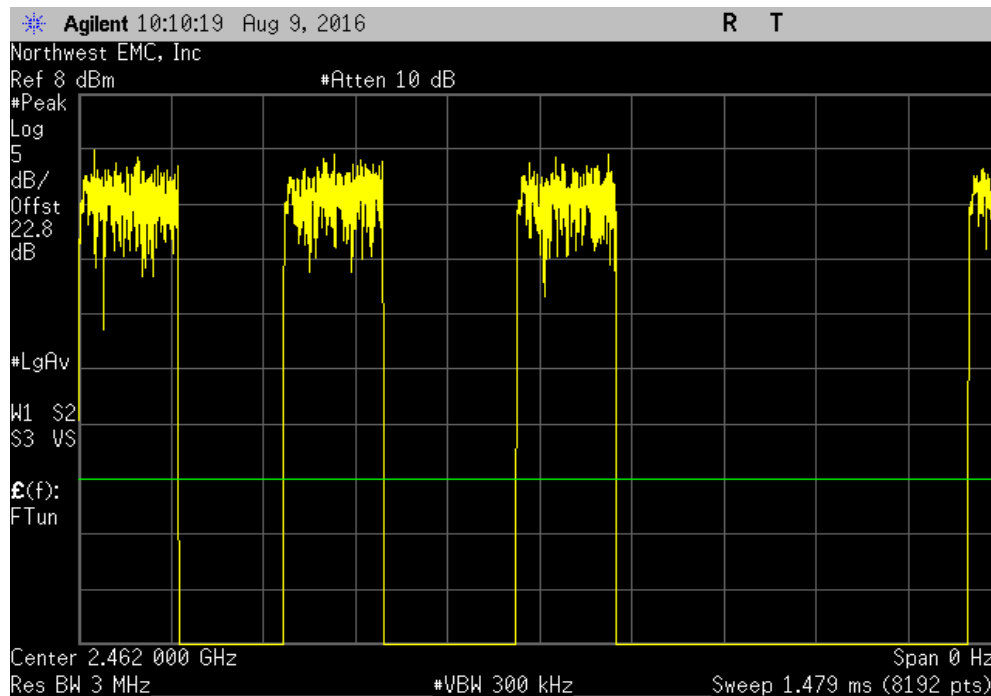


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
35.11 μ s	176.5 μ s	1	19.9	N/A	N/A	

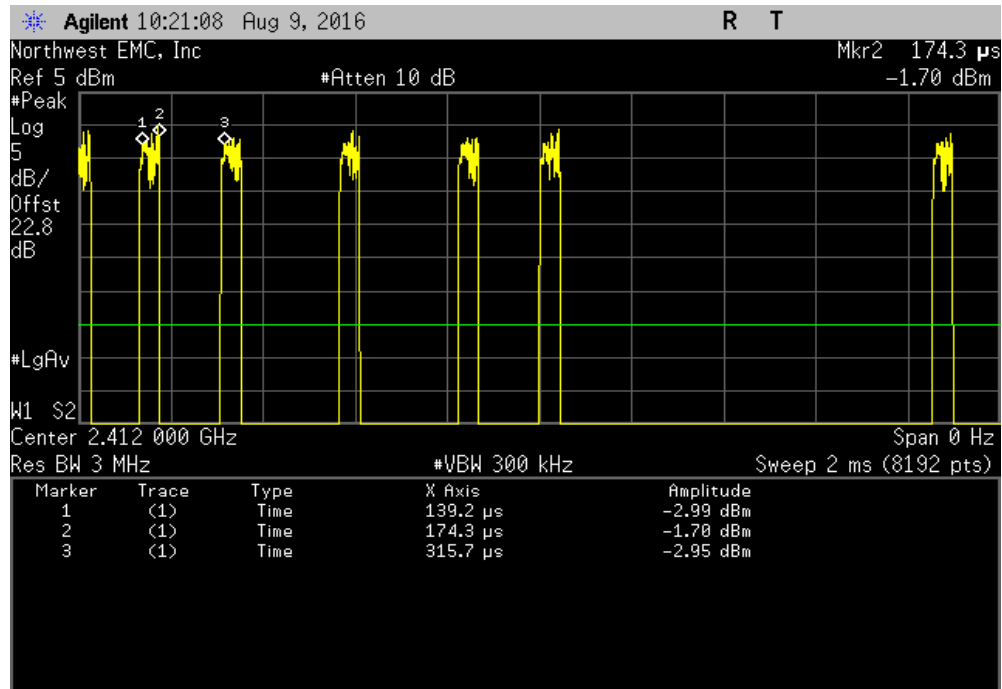


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

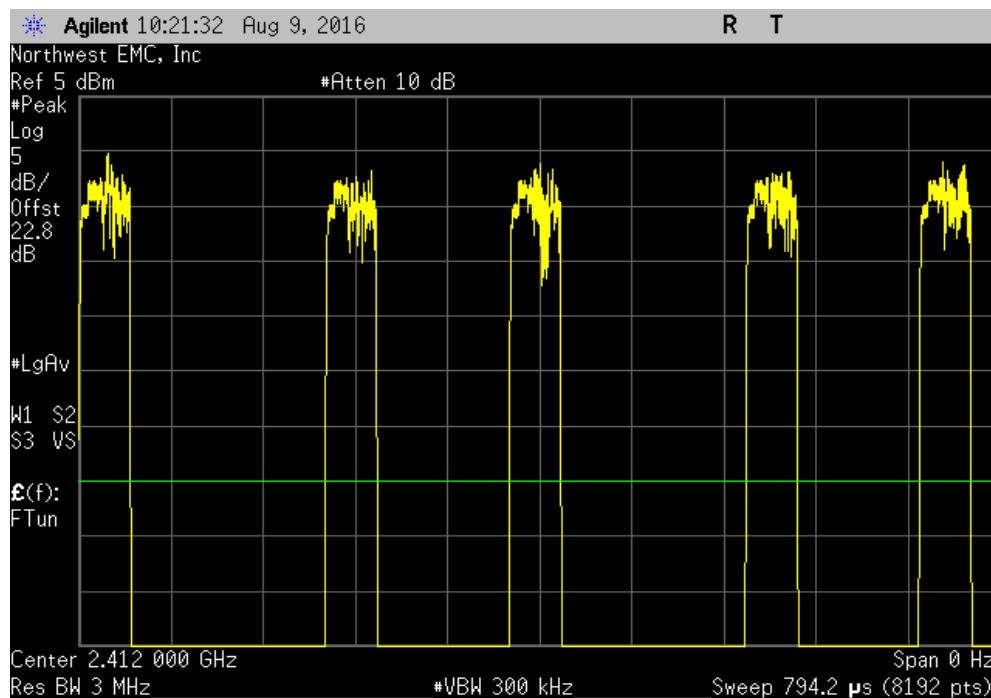


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
35.354 us	203.077 us	1	17.4	N/A	N/A	

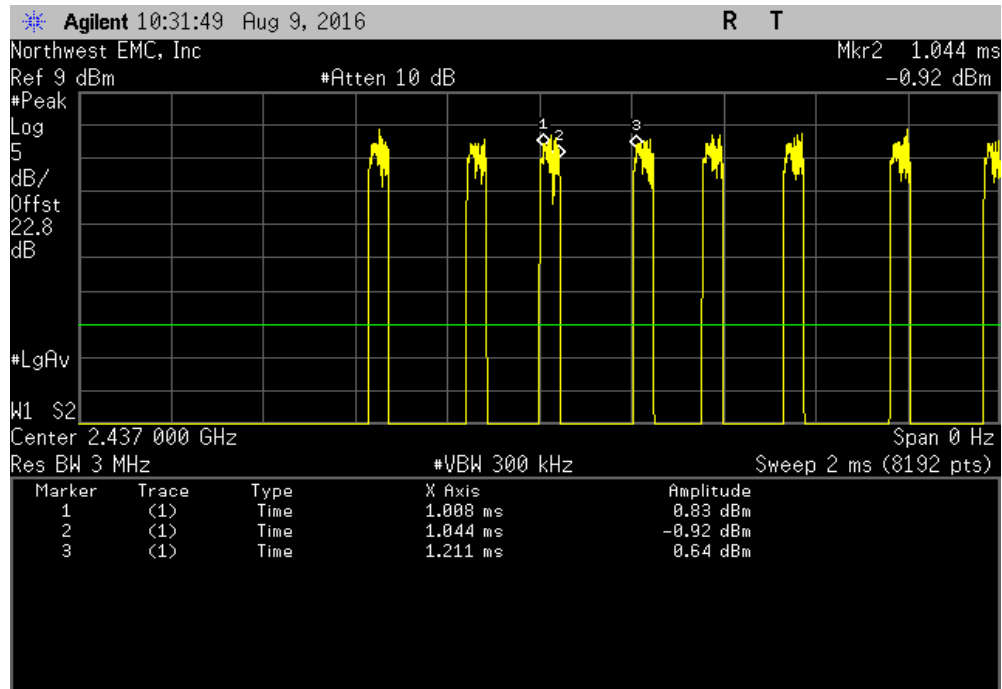


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

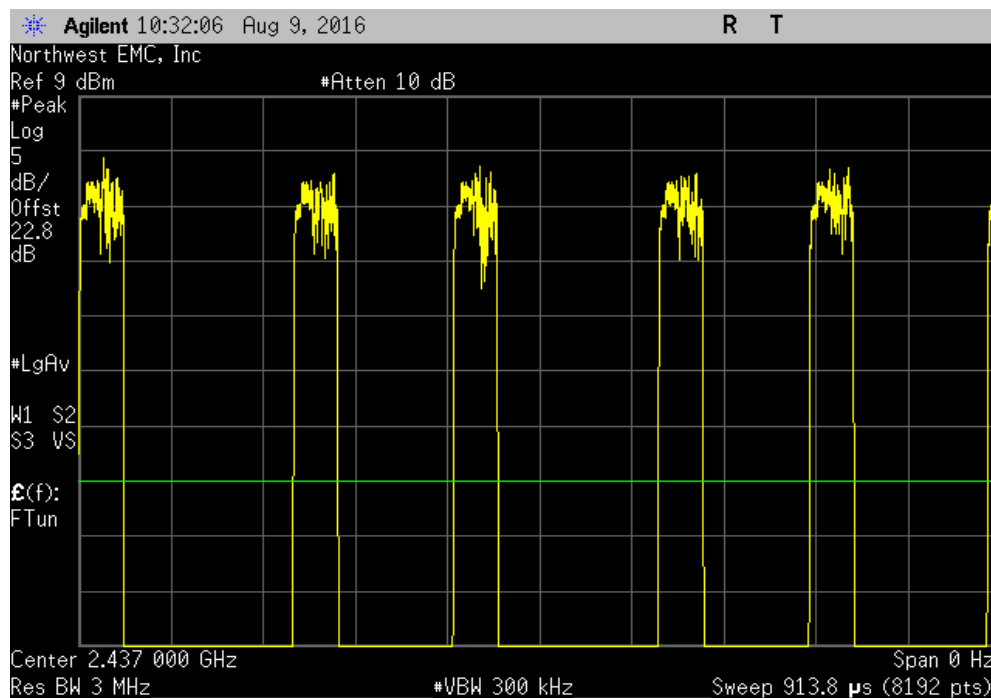


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
35.31 us	149.416 us	1	23.6	N/A	N/A	

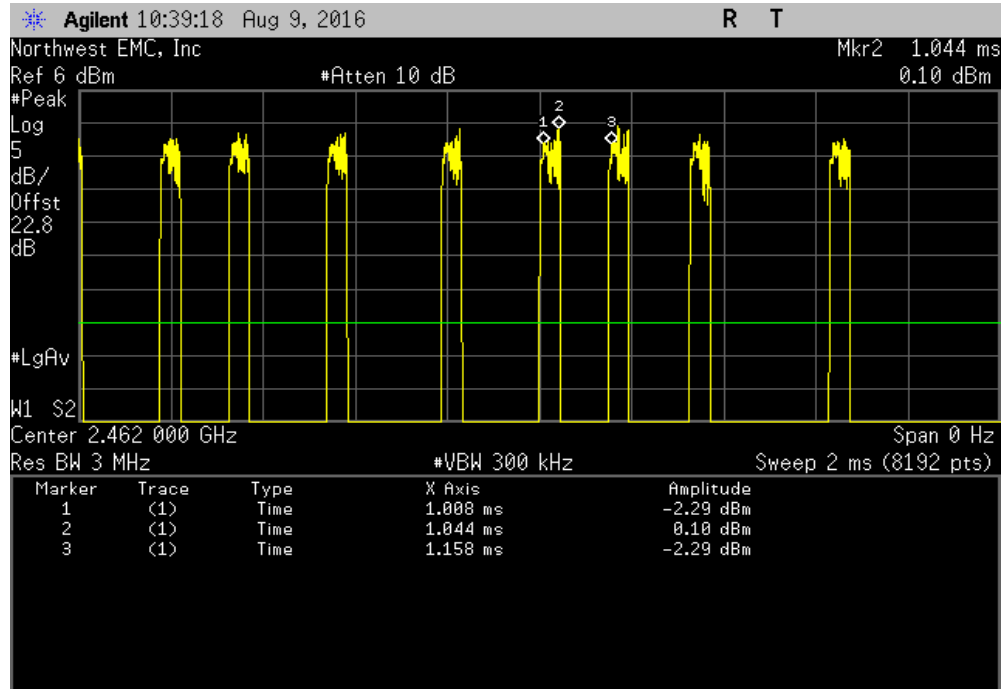


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	4	N/A	N/A	N/A	

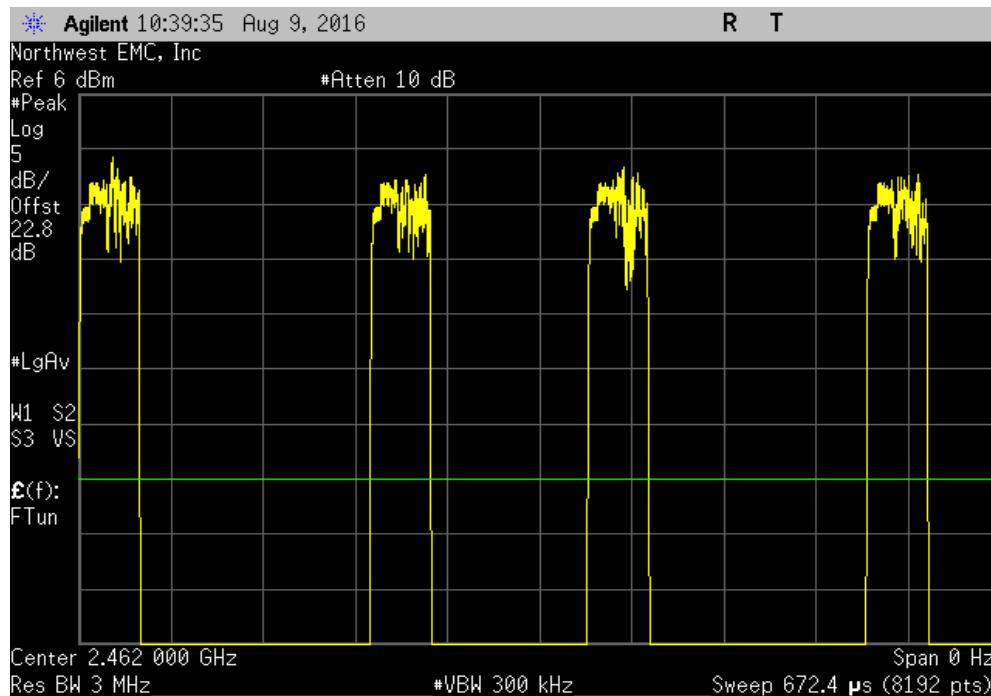


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
27.11 us	200.671 us	1	13.5	N/A	N/A	

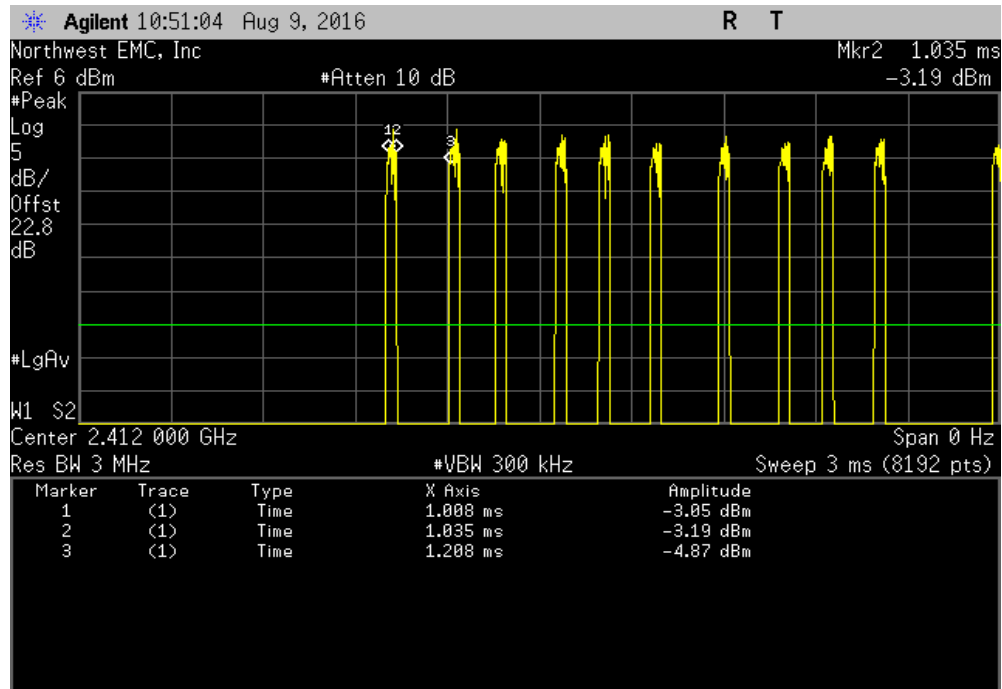


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	6	N/A	N/A	N/A	

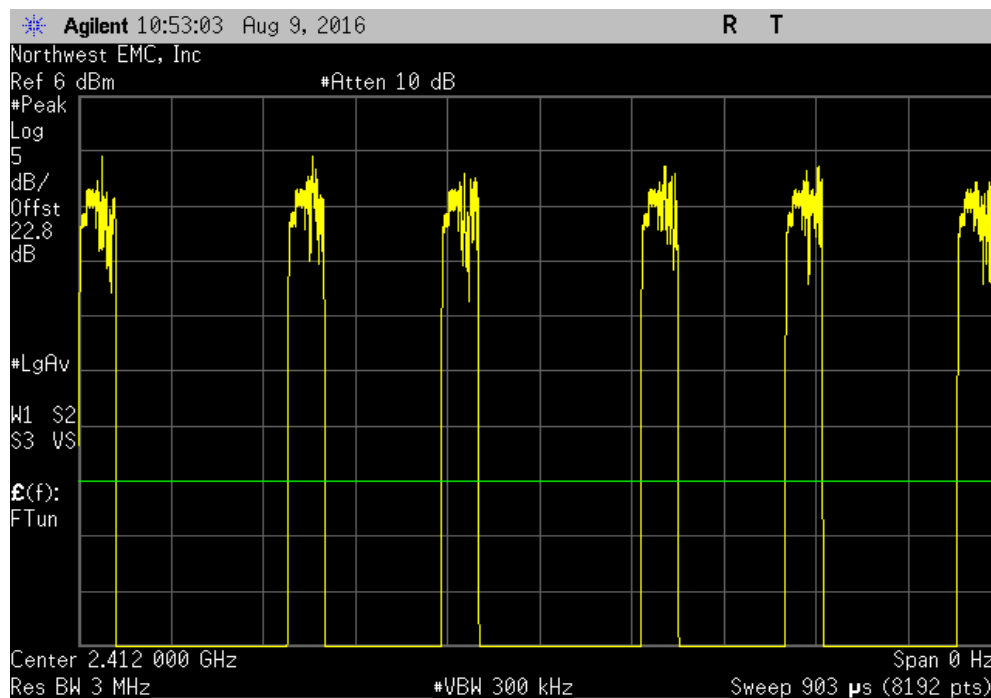


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
24.68 μ s	195.347 μ s	1	12.6	N/A	N/A	

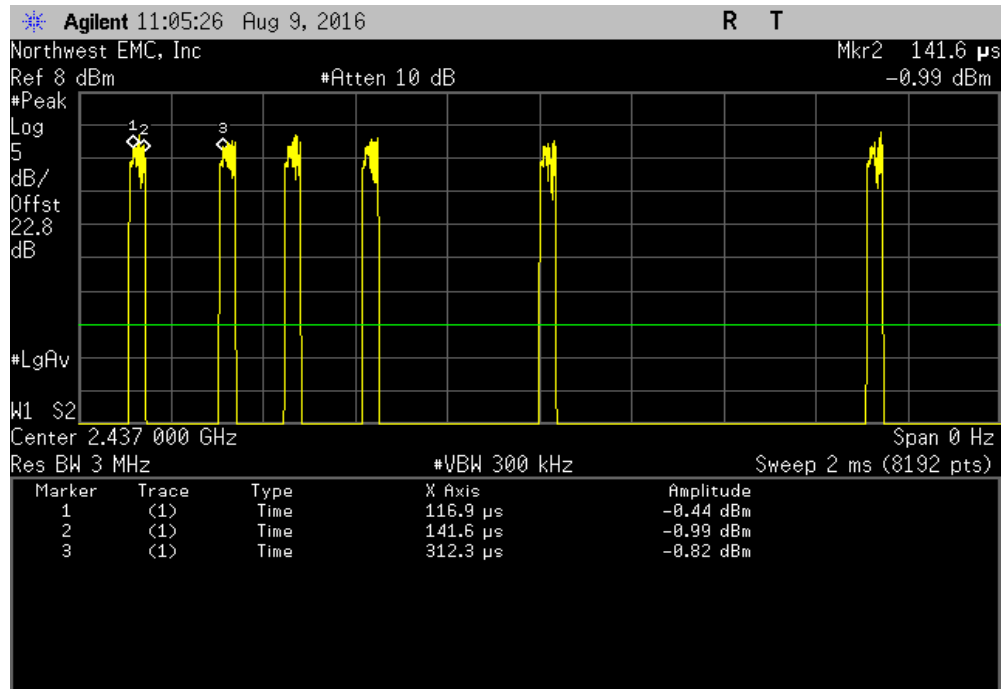


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	4	N/A	N/A	N/A	

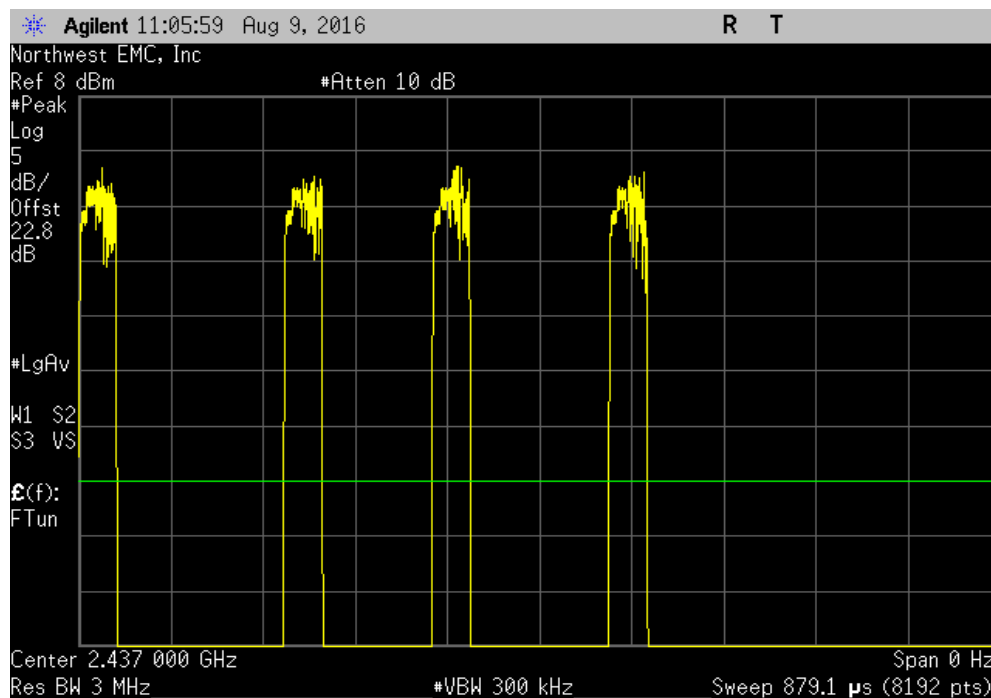


DUTY CYCLE

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
27.31 us	277.777 us	1	9.8	N/A	N/A	

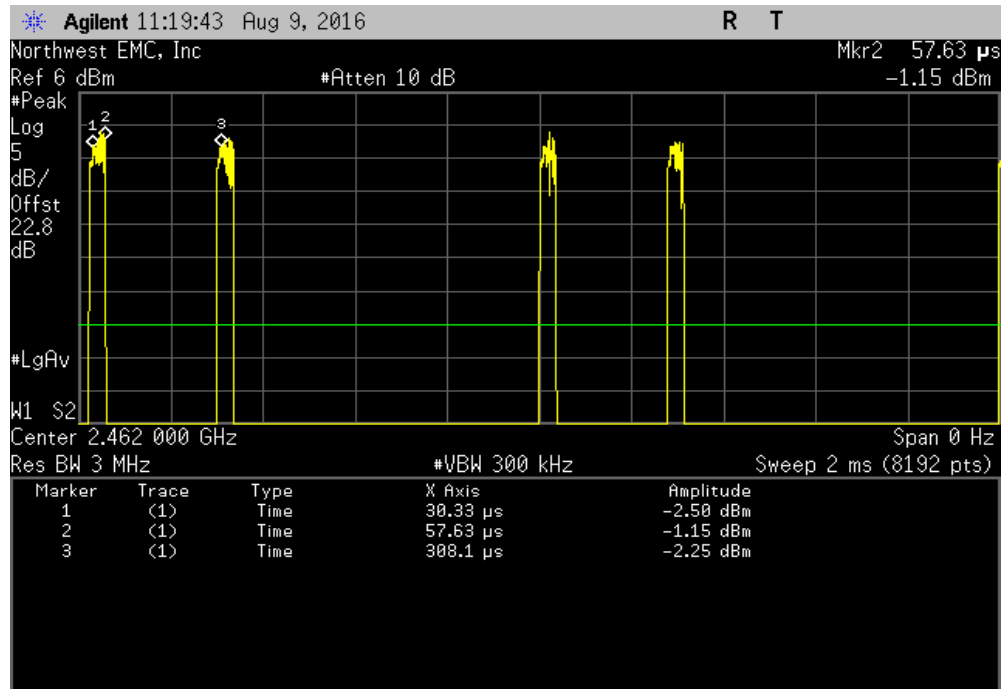

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

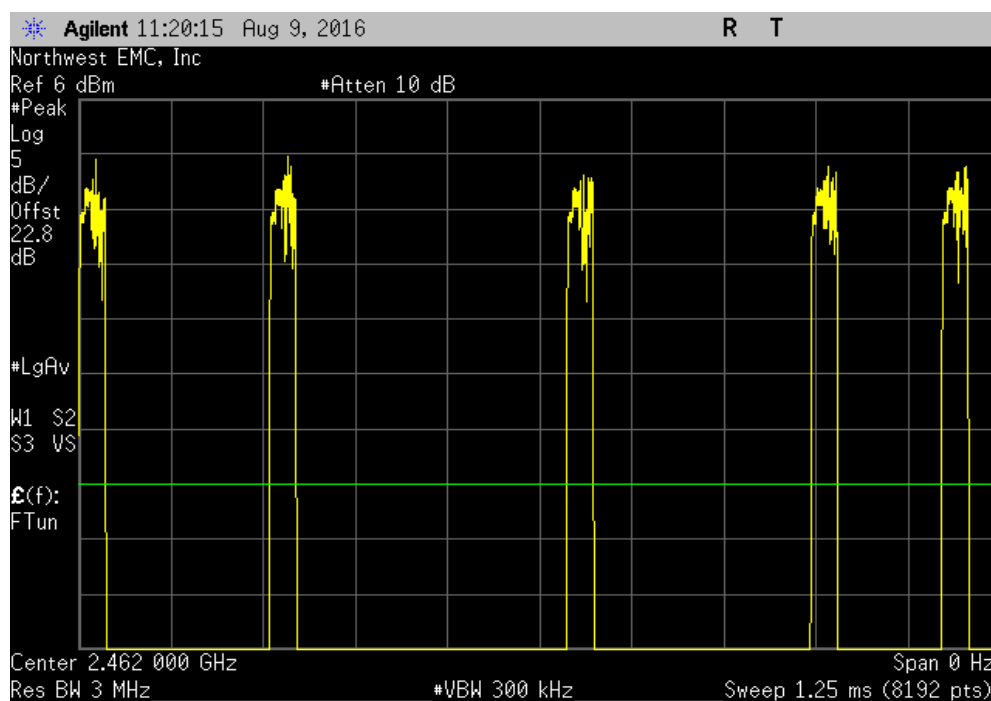

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.


OCCUPIED BANDWIDTH

EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = 0.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	4	Signature 	
		Value	Limit (>)
2400 MHz - 2483.5 MHz Band			
802.11(b) 1 Mbps			
	Low Channel 1, 2412 MHz	8.722 MHz	500 kHz
	Mid Channel 6, 2437 MHz	9.07 MHz	500 kHz
	High Channel 11, 2462 MHz	9.166 MHz	500 kHz
802.11(b) 11 Mbps			
	Low Channel 1, 2412 MHz	9.934 MHz	500 kHz
	Mid Channel 6, 2437 MHz	10.025 MHz	500 kHz
	High Channel 11, 2462 MHz	10.05 MHz	500 kHz
802.11(g) 6 Mbps			
	Low Channel 1, 2412 MHz	15.023 MHz	500 kHz
	Mid Channel 6, 2437 MHz	14.984 MHz	500 kHz
	High Channel 11, 2462 MHz	14.978 MHz	500 kHz
802.11(g) 36 Mbps			
	Low Channel 1, 2412 MHz	16.274 MHz	500 kHz
	Mid Channel 6, 2437 MHz	16.148 MHz	500 kHz
	High Channel 11, 2462 MHz	16.281 MHz	500 kHz
802.11(g) 54 Mbps			
	Low Channel 1, 2412 MHz	16.224 MHz	500 kHz
	Mid Channel 6, 2437 MHz	16.261 MHz	500 kHz
	High Channel 11, 2462 MHz	15.852 MHz	500 kHz

OCCUPIED BANDWIDTH


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz

	Value	Limit	Result
	8.722 MHz	(>) 500 kHz	Pass

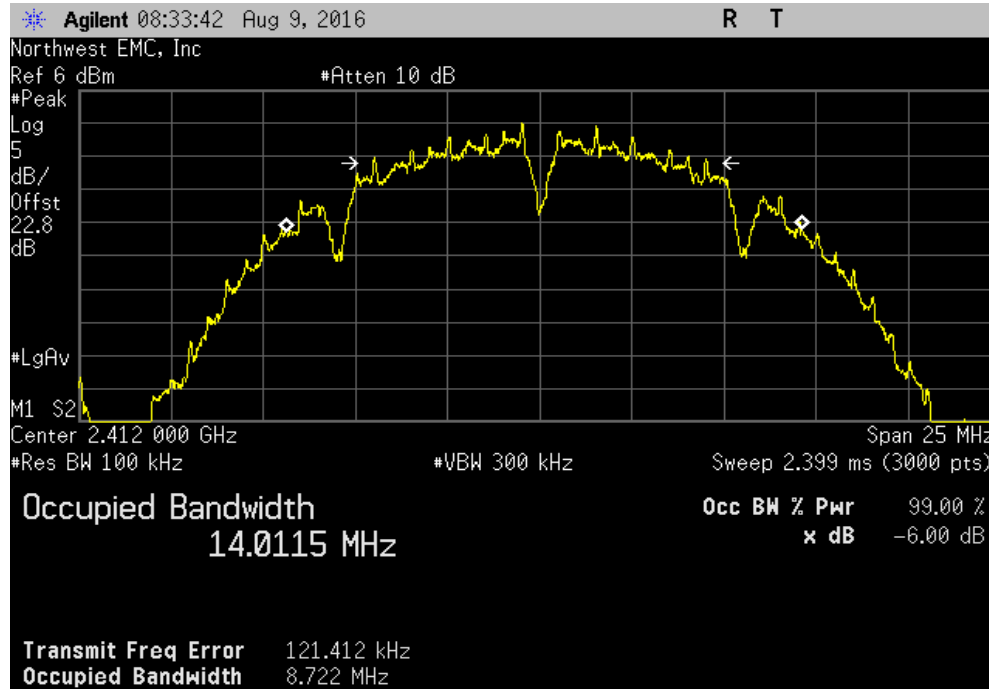


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz

	Value	Limit	Result
	9.07 MHz	(>) 500 kHz	Pass

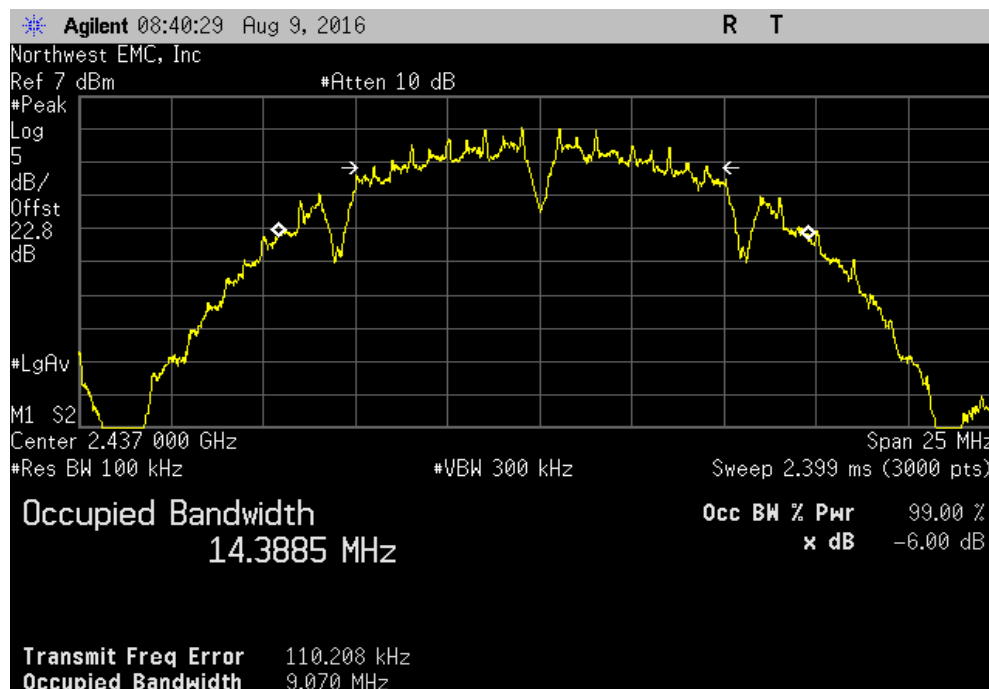


OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
				Value	Limit	Result
				9.166 MHz	500 kHz	Pass

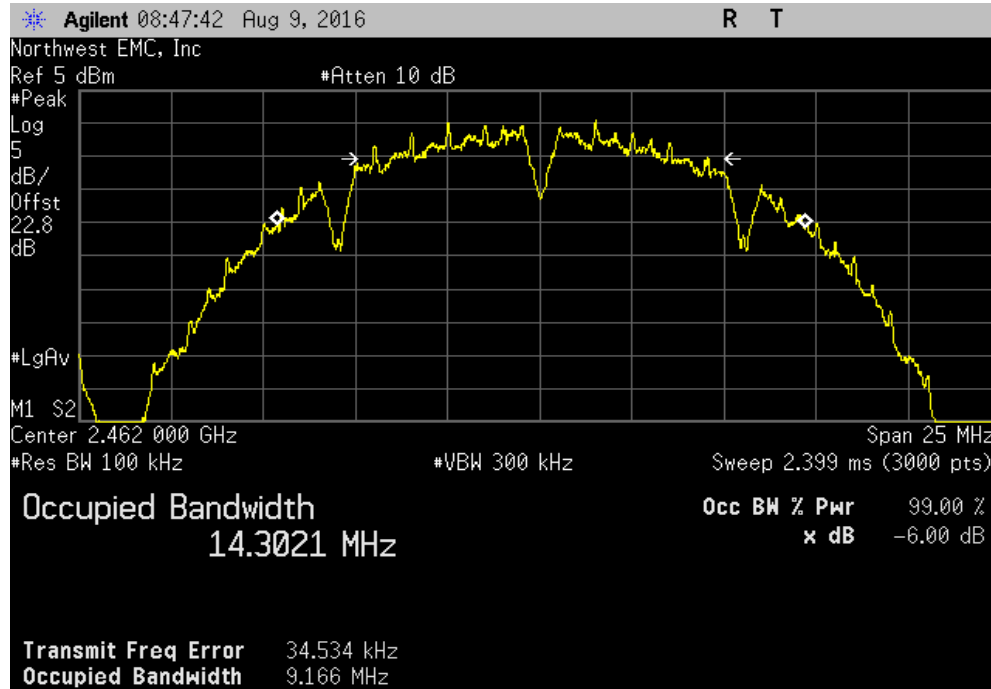


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
				Value	Limit	Result
				9.934 MHz	500 kHz	Pass

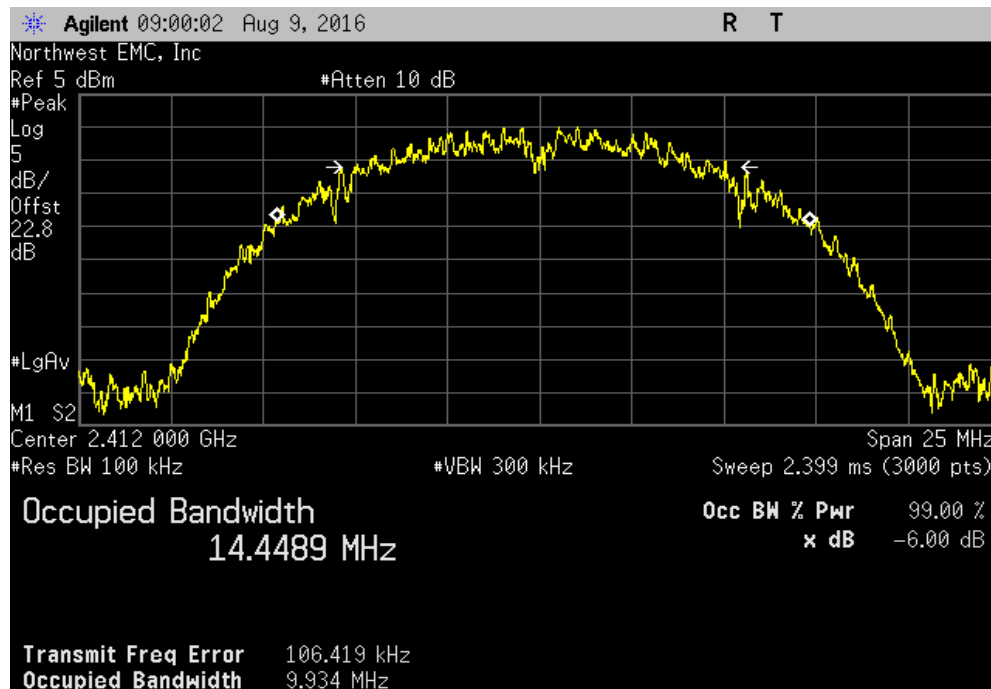


OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
				Value	Limit	Result
				10.025 MHz	500 kHz	Pass

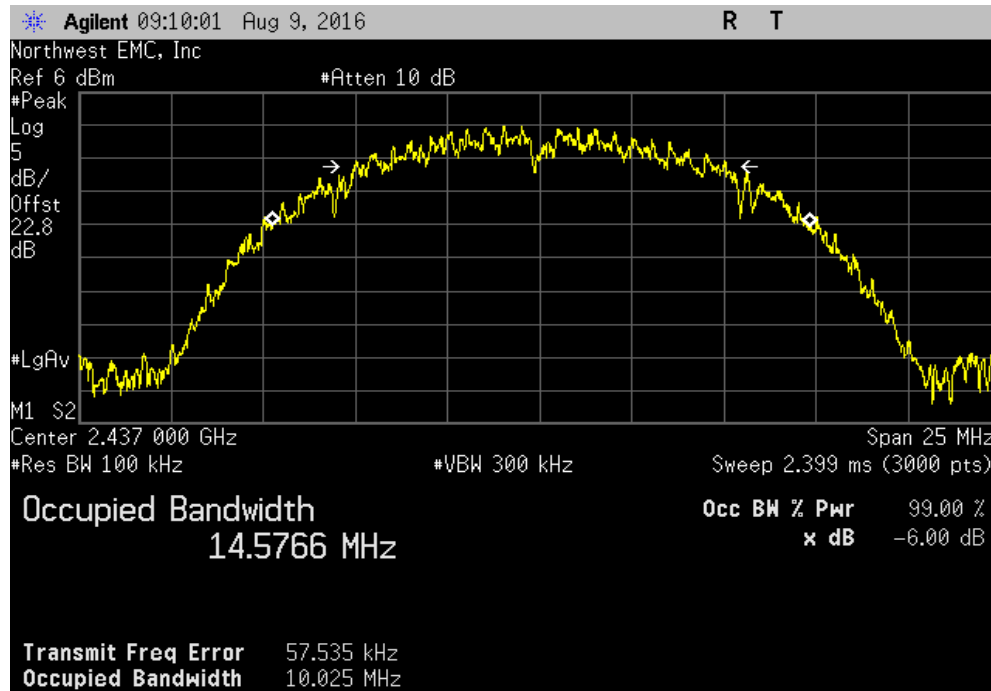


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
				Value	Limit	Result
				10.05 MHz	500 kHz	Pass

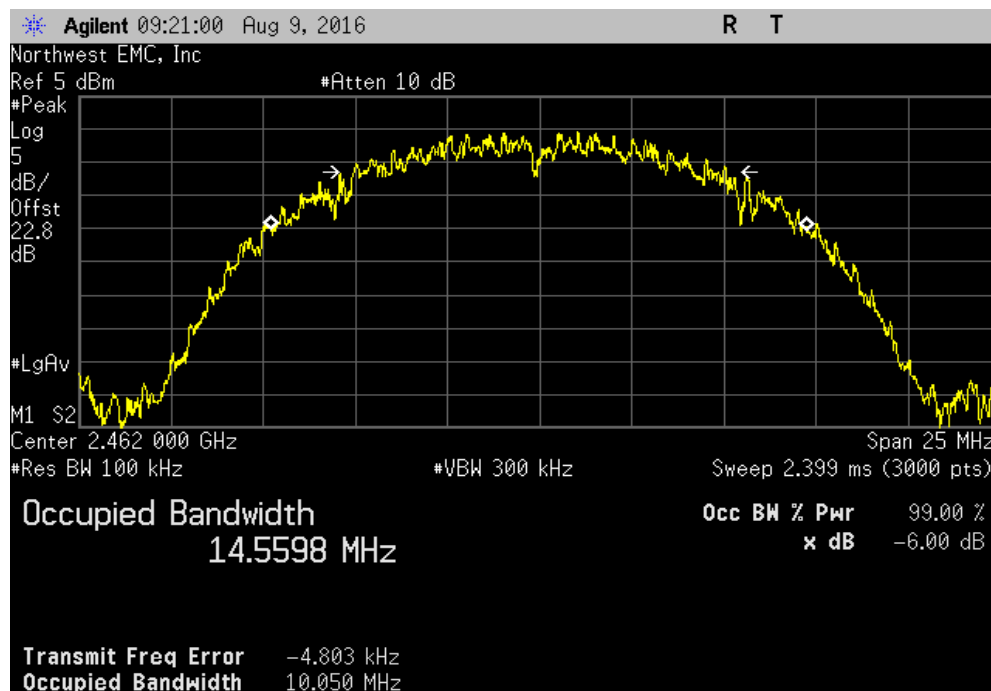

OCCUPIED BANDWIDTH


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz

	Value	Limit	Result
	15.023 MHz	(>) 500 kHz	Pass

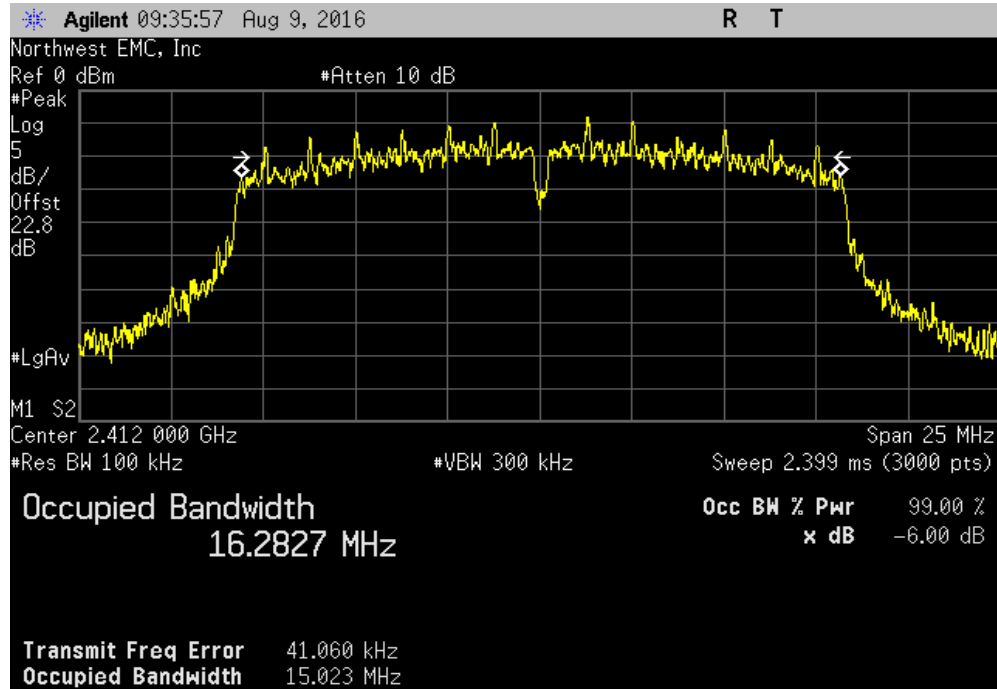


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz

	Value	Limit	Result
	14.984 MHz	(>) 500 kHz	Pass

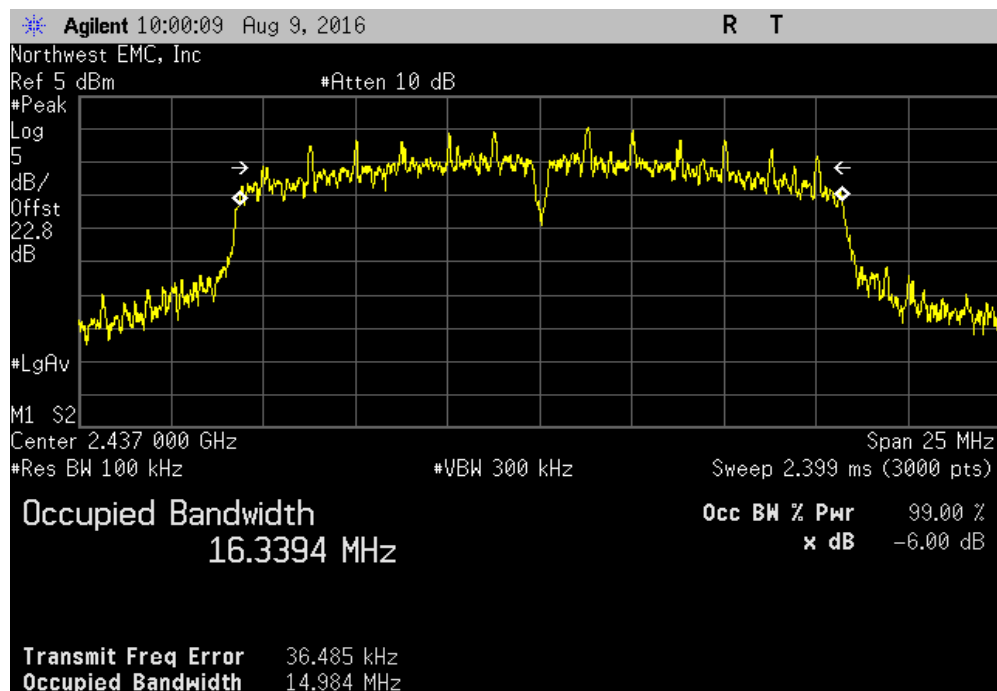


OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
				Value	Limit	Result
				14.978 MHz	500 kHz	Pass

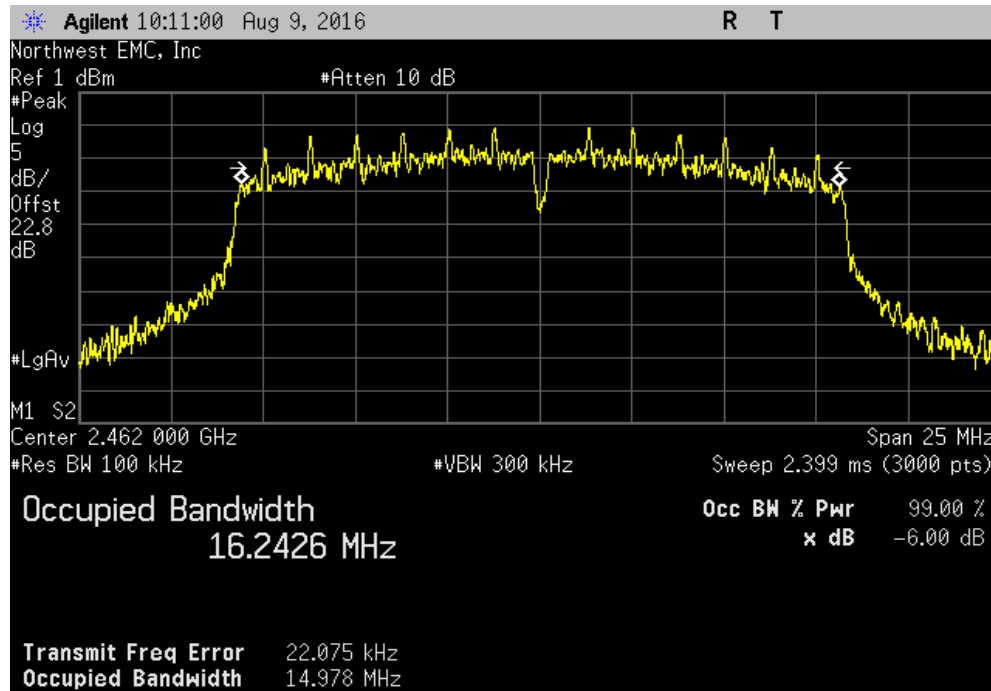


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
				Value	Limit	Result
				16.274 MHz	500 kHz	Pass

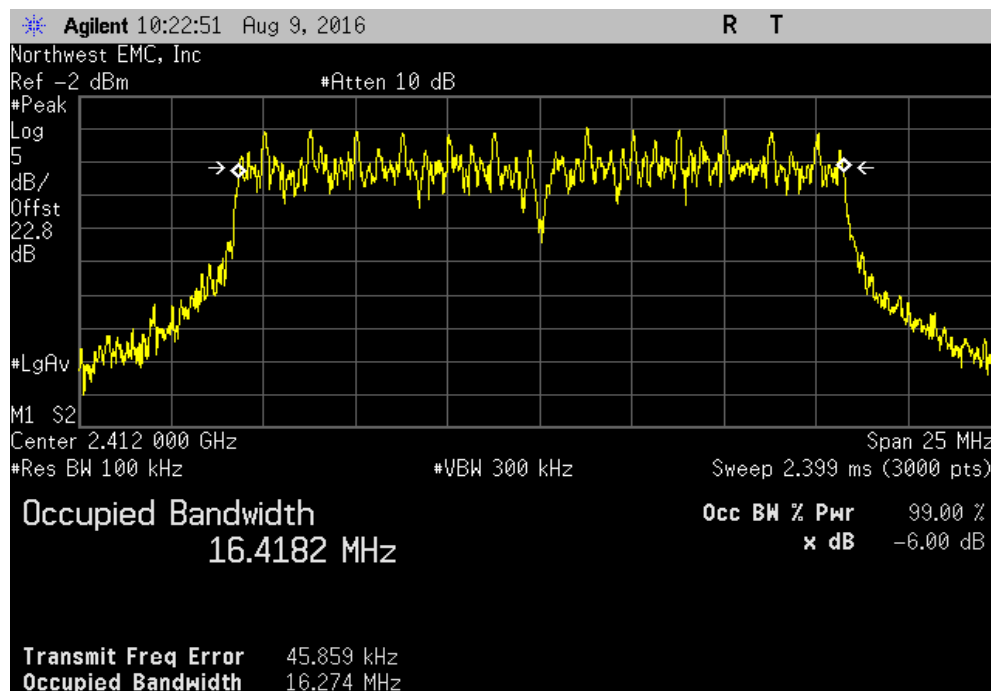


OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
				Value	Limit	Result
				16.148 MHz	500 kHz	Pass

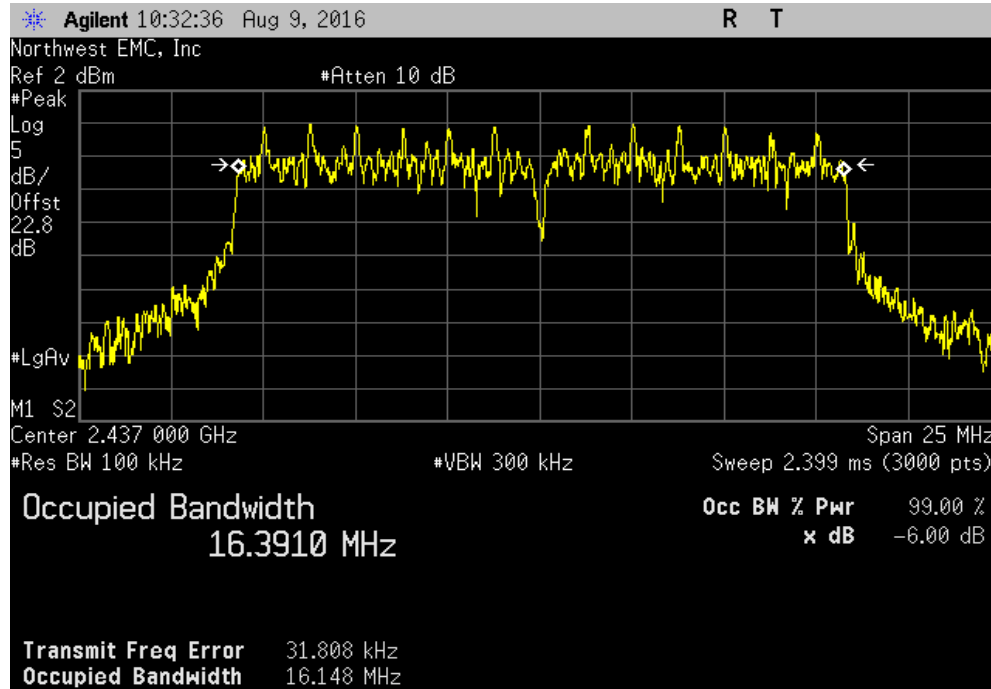


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
				Value	Limit	Result
				16.281 MHz	500 kHz	Pass

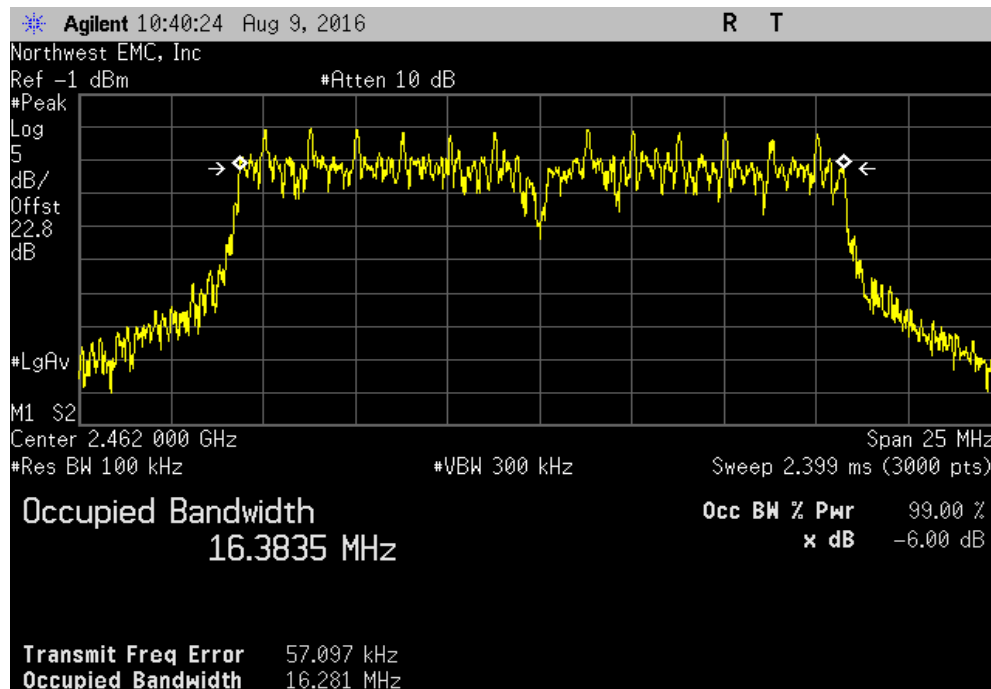


OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
				Value	Limit	Result
				16.224 MHz	500 kHz	Pass

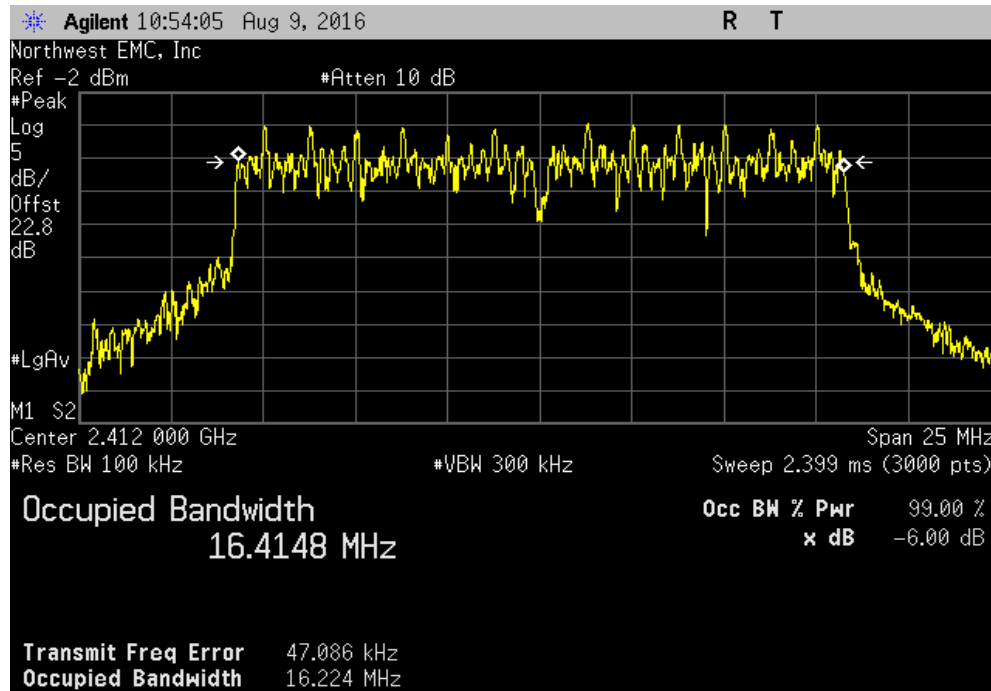


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
				Value	Limit	Result
				16.261 MHz	500 kHz	Pass

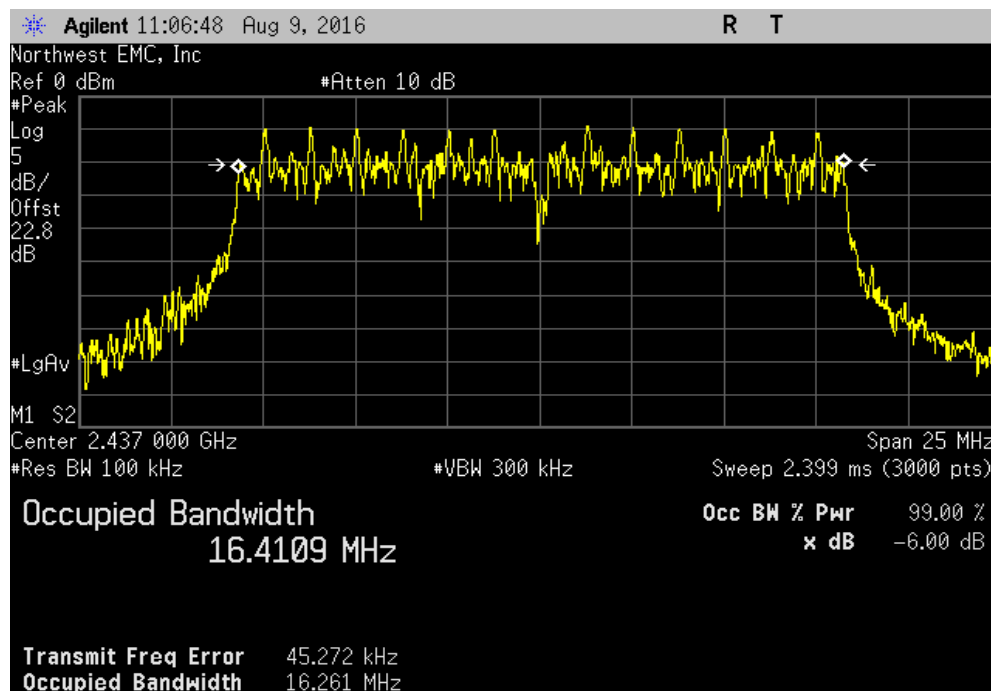

OCCUPIED BANDWIDTH

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
				Value	Limit	Result
				(>)		
				15.852 MHz	500 kHz	Pass

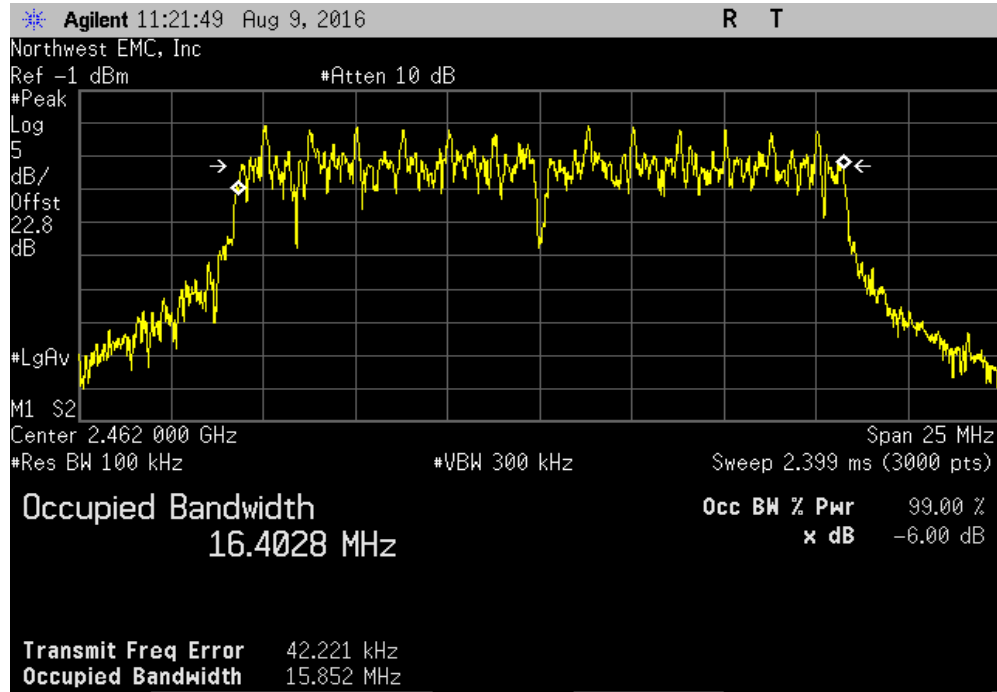

OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The fundamental emission output power (maximum average conducted output power) was measured using the channels and modes as called out on the following data sheets. The transmit power was set to its default maximum.

Prior to measuring output power; the emission bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The method AVGSA-2 in section 11.9.2.2.4 of ANSI C63.10:2013 was used to make the measurement. This method uses trace averaging across ON and OFF times of the EUT transmissions in the spectrum analyzer channel power function using an RMS detector. Following the measurement a duty cycle correction was applied by adding $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.


De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran	Power: USB Powered	Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = 0.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	4	Signature 	
		Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)
		Value (dBm)	Limit (dBm)
			Results
2400 MHz - 2483.5 MHz Band			
802.11(b) 1 Mbps			
	Low Channel 1, 2412 MHz	7.562	1.7
	Mid Channel 6, 2437 MHz	9.332	1.7
	High Channel 11, 2462 MHz	8.294	1.6
802.11(b) 11 Mbps			
	Low Channel 1, 2412 MHz	6.468	3.8
	Mid Channel 6, 2437 MHz	7.405	3.8
	High Channel 11, 2462 MHz	6.447	3
802.11(g) 6 Mbps			
	Low Channel 1, 2412 MHz	0.676	2.5
	Mid Channel 6, 2437 MHz	4.737	3.7
	High Channel 11, 2462 MHz	1.113	3.4
802.11(g) 36 Mbps			
	Low Channel 1, 2412 MHz	-6.667	7
	Mid Channel 6, 2437 MHz	-3.054	7.6
	High Channel 11, 2462 MHz	-6.25	6.3
802.11(g) 54 Mbps			
	Low Channel 1, 2412 MHz	-7.342	8.7
	Mid Channel 6, 2437 MHz	-5.095	9
	High Channel 11, 2462 MHz	-6.971	10.1

OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
7.562	1.7	9.3	30	Pass		

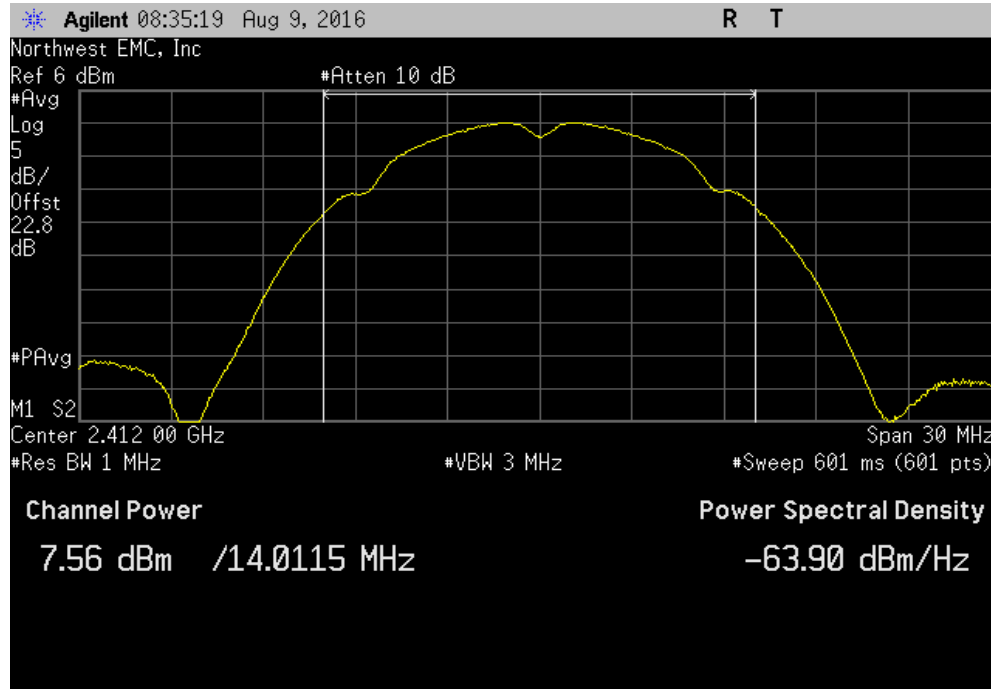


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
9.332	1.7	11	30	Pass		

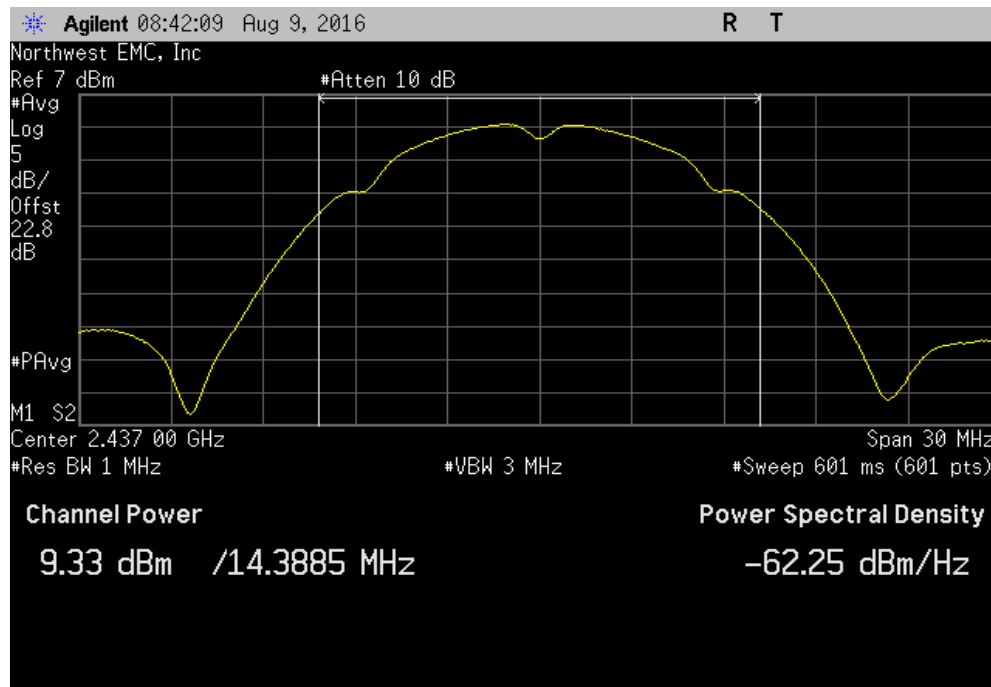


OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
8.294	1.6		9.9	30	Pass	

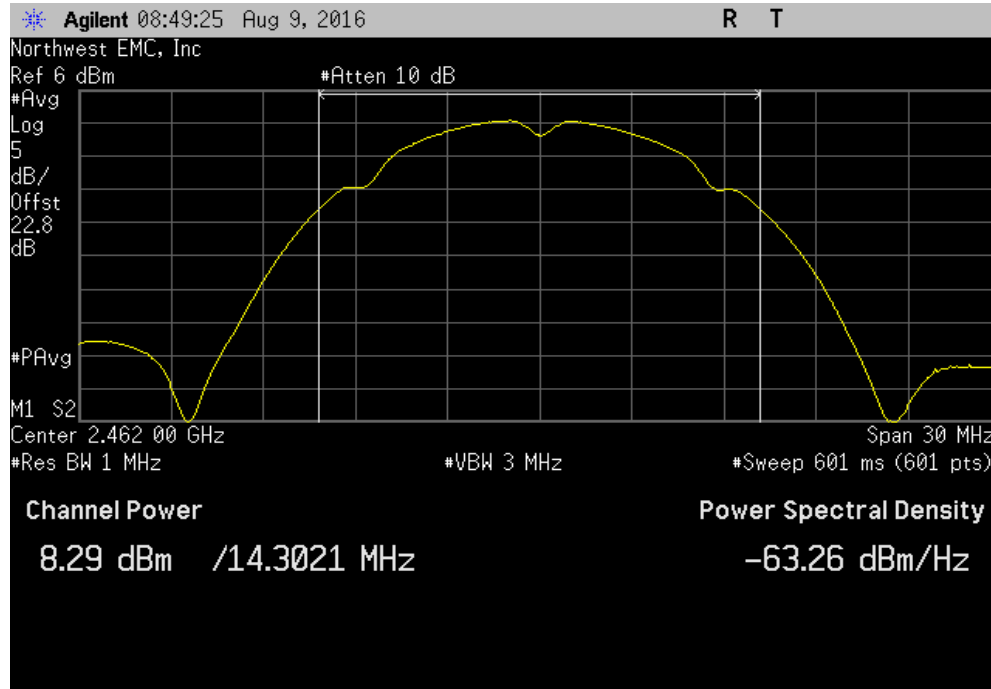


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
6.468	3.8		10.3	30	Pass	

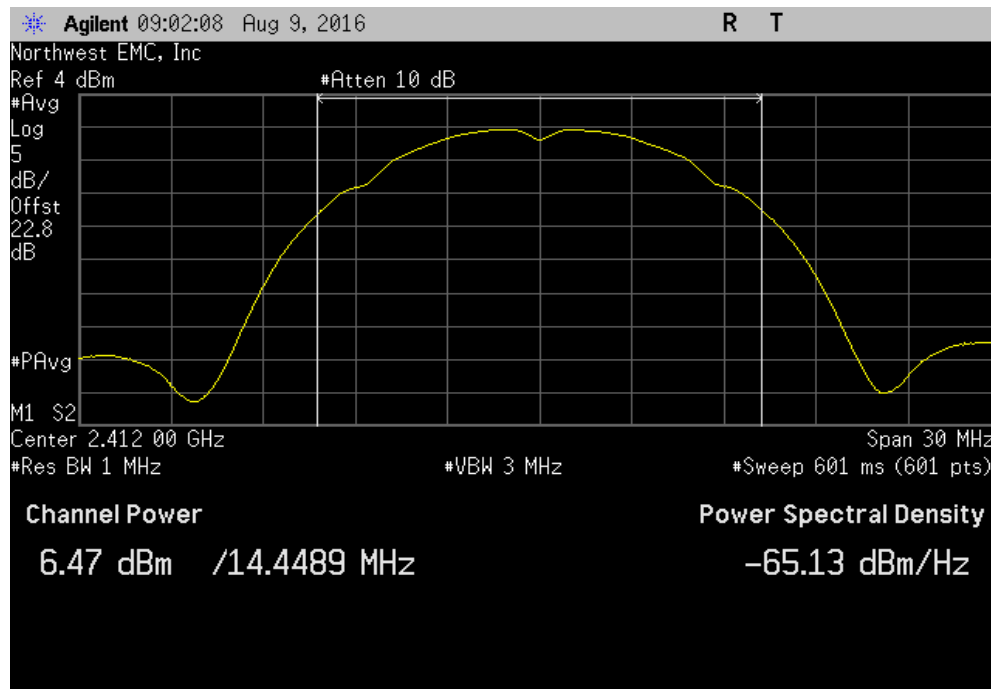


OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
	7.405	3.8	11.2	30	Pass	

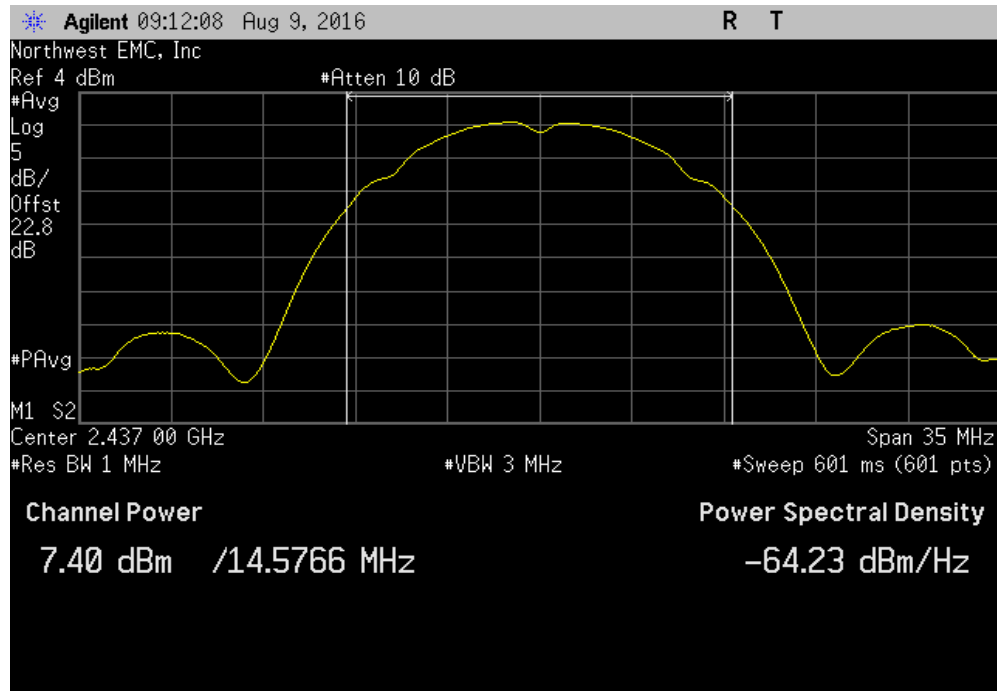


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
	6.447	3	9.4	30	Pass	

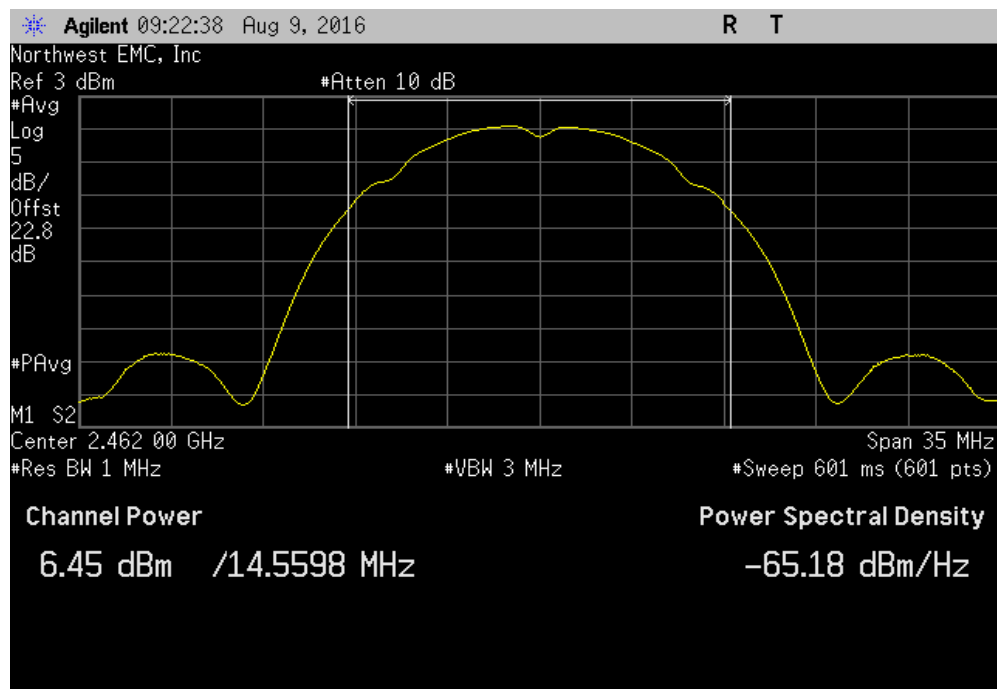


OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
0.676	2.5	3.2	30	Pass		

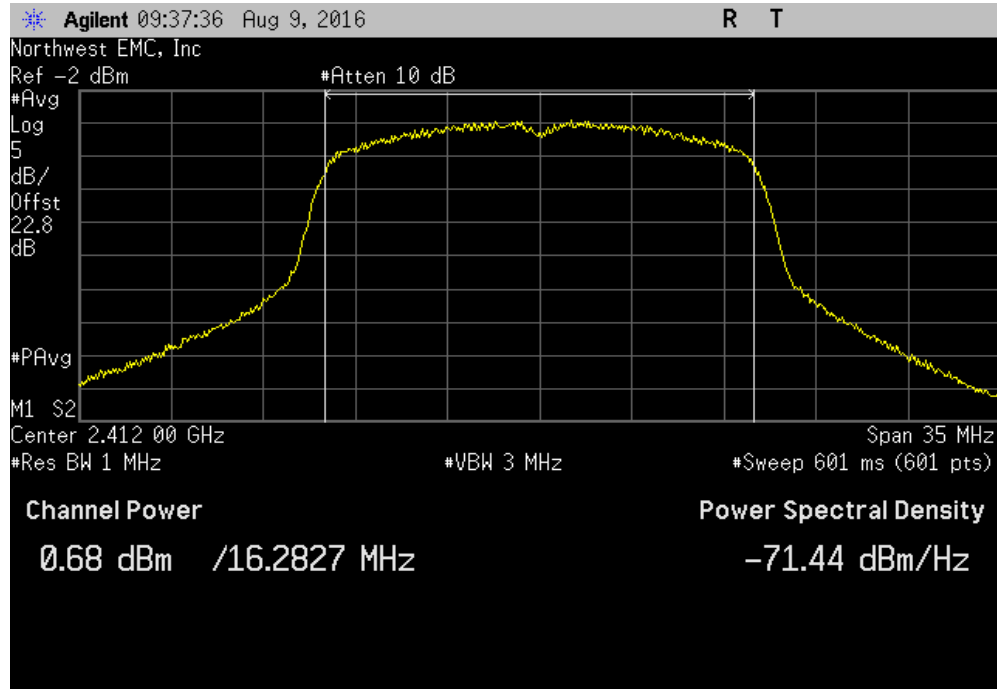


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
4.737	3.7	8.4	30	Pass		

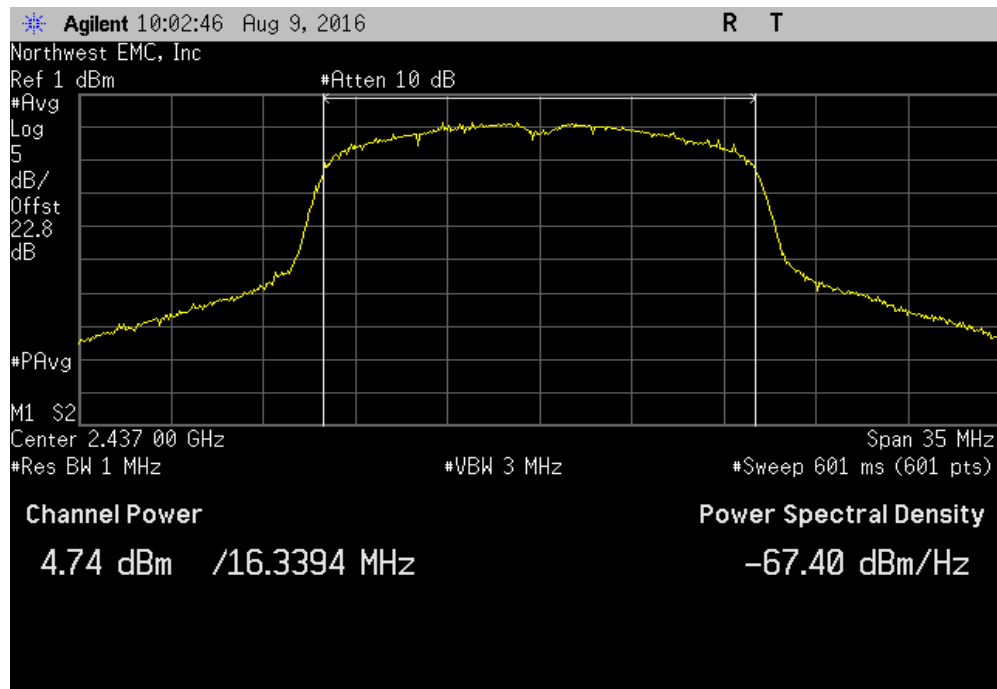


OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
1.113	3.4		4.5	30	Pass	

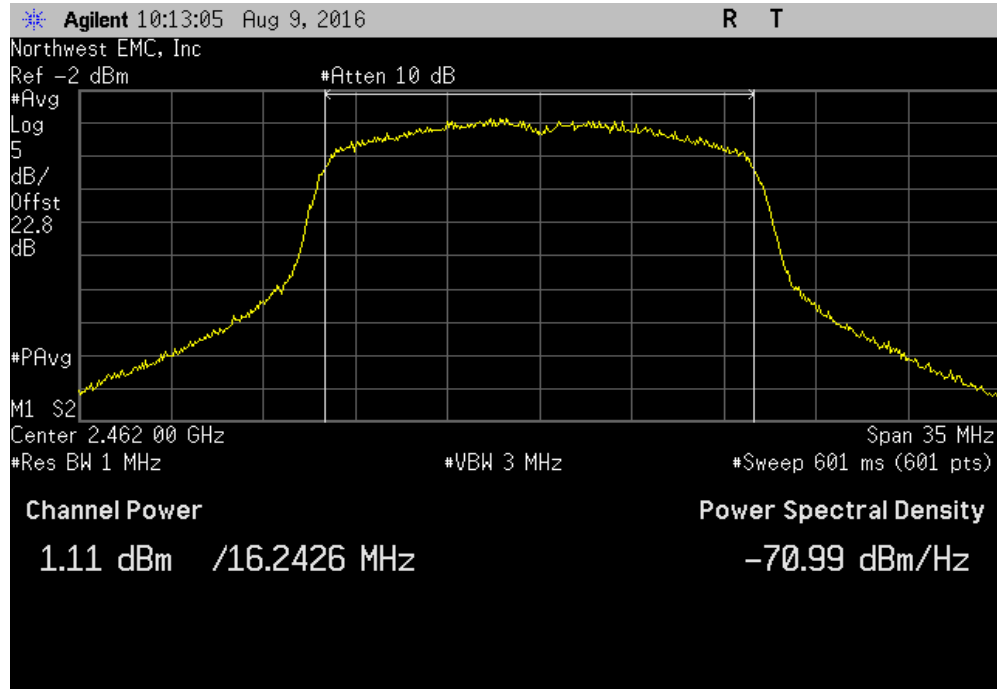


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
-6.667	7		0.3	30	Pass	

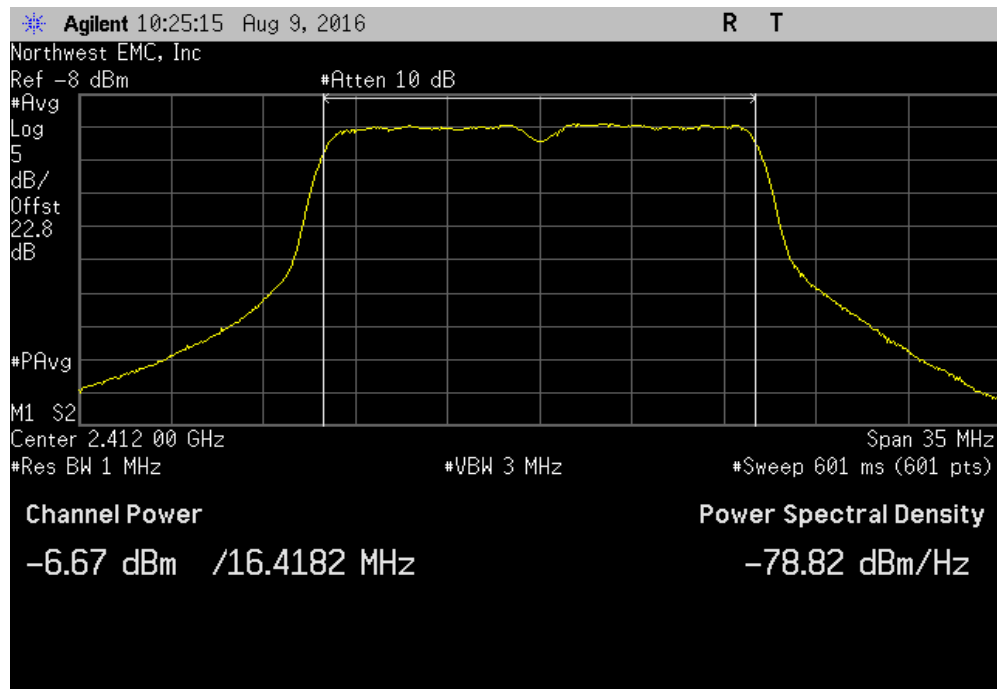


OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
-3.054	7.6	4.5	30	Pass		

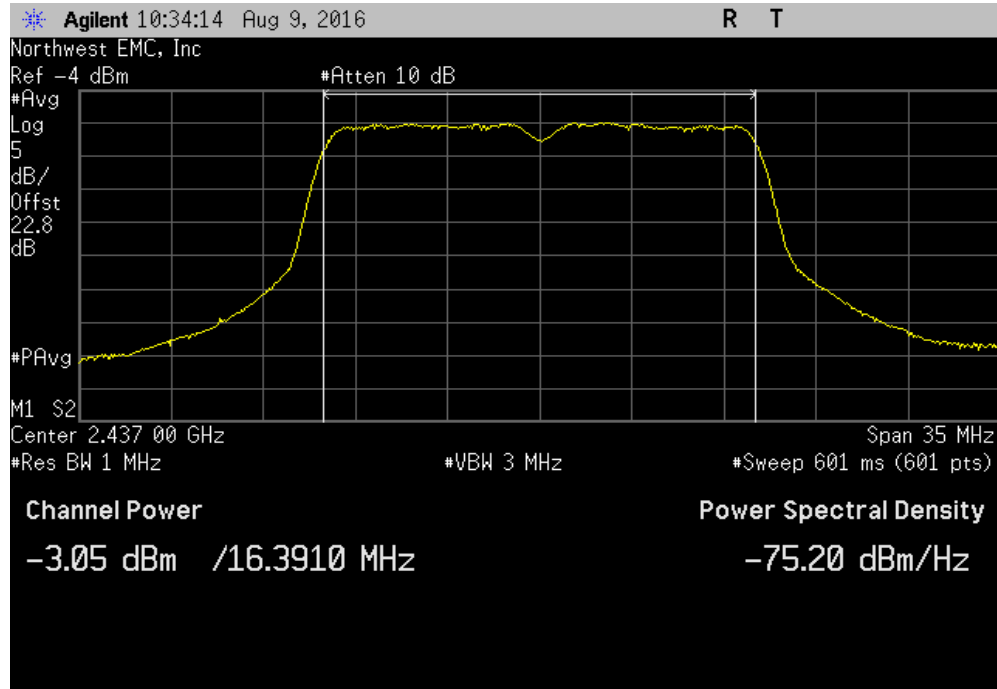


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
-6.25	6.3	0	30	Pass		

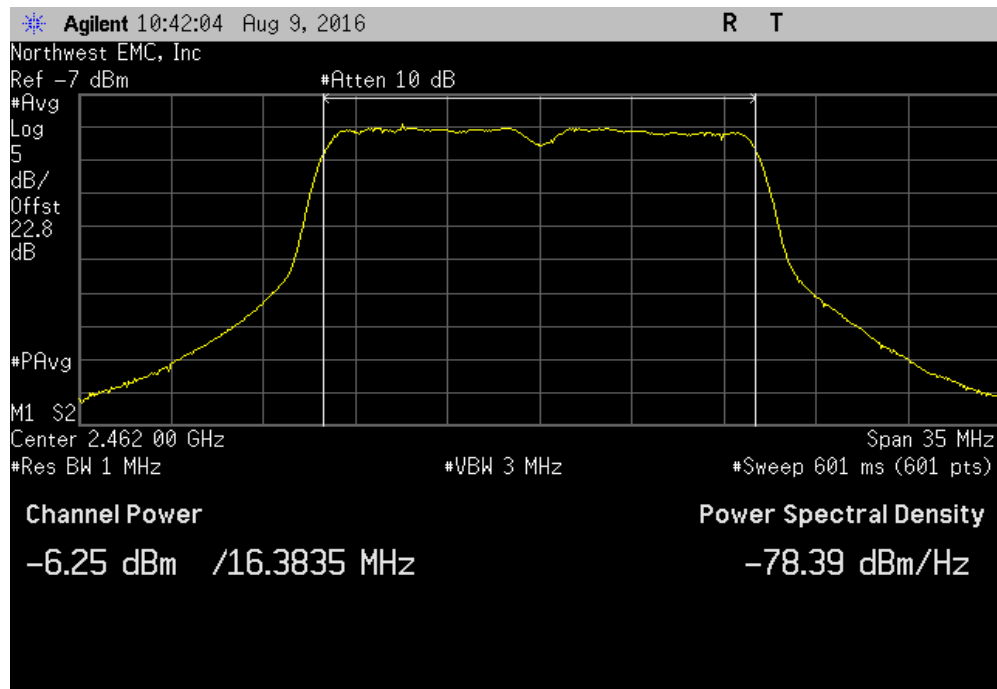


OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
-7.342	8.7	1.4	30	Pass		

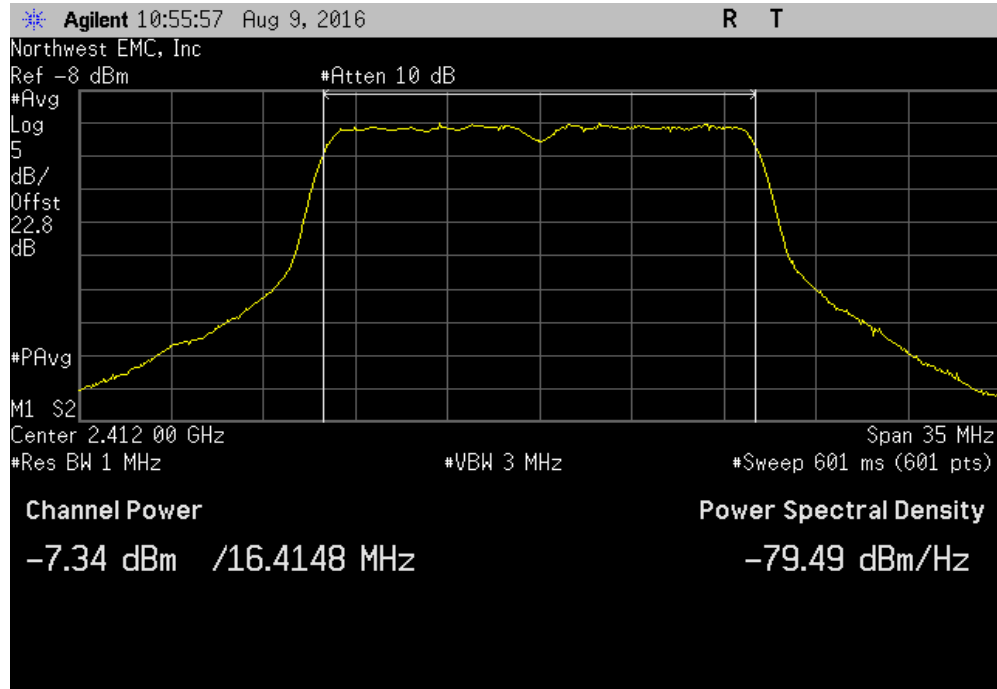


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
Avg Cond	Duty Cycle	Value	Limit	Results		
Pwr (dBm)	Factor (dB)	(dBm)	(dBm)			
-5.095	9	3.9	30	Pass		

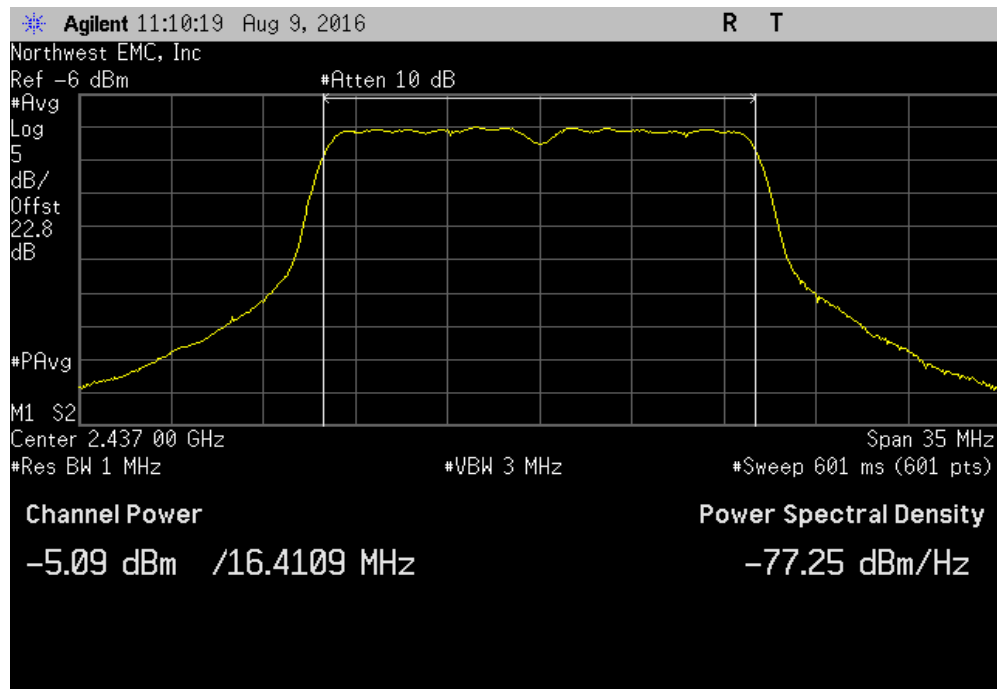

OUTPUT POWER

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Avg Cond	Duty Cycle		Value	Limit	Results	
Pwr (dBm)	Factor (dB)		(dBm)	(dBm)		
-6.971	10.1		3.1	30	Pass	

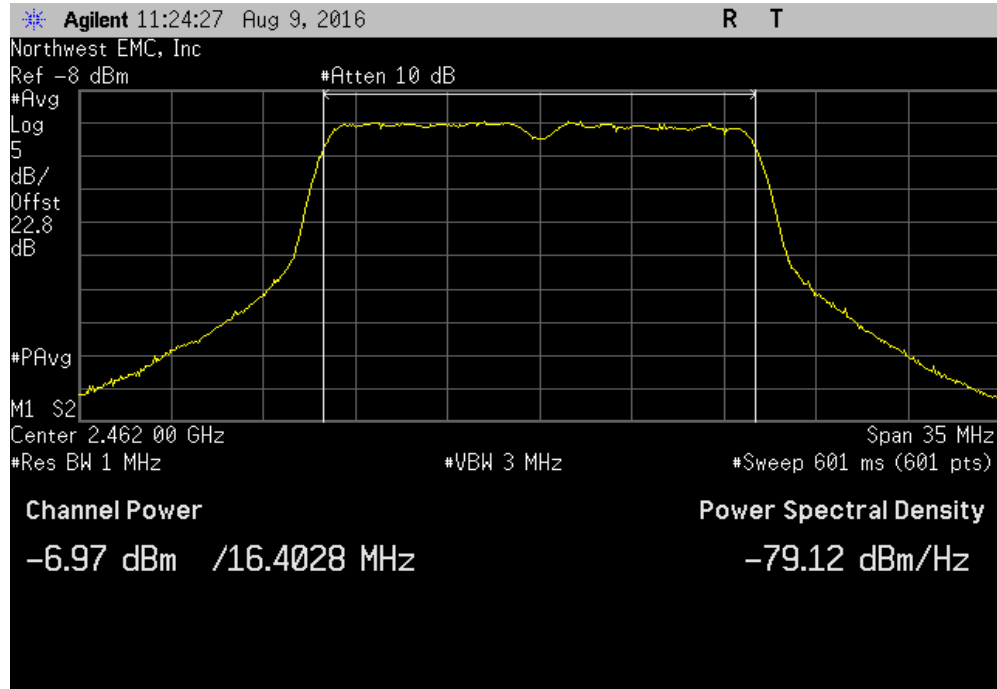

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.


Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = 0.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	4	Signature 	
		Value dBm/3kHz	Limit < dBm/3kHz
2400 MHz - 2483.5 MHz Band			
802.11(b) 1 Mbps			
	Low Channel 1, 2412 MHz	-14.201	8
	Mid Channel 6, 2437 MHz	-13.534	8
	High Channel 11, 2462 MHz	-14.433	8
802.11(b) 11 Mbps			
	Low Channel 1, 2412 MHz	-13.79	8
	Mid Channel 6, 2437 MHz	-13.127	8
	High Channel 11, 2462 MHz	-14.119	8
802.11(g) 6 Mbps			
	Low Channel 1, 2412 MHz	-20.272	8
	Mid Channel 6, 2437 MHz	-15.461	8
	High Channel 11, 2462 MHz	-19.847	8
802.11(g) 36 Mbps			
	Low Channel 1, 2412 MHz	-25.186	8
	Mid Channel 6, 2437 MHz	-21.19	8
	High Channel 11, 2462 MHz	-25.151	8
802.11(g) 54 Mbps			
	Low Channel 1, 2412 MHz	-25.143	8
	Mid Channel 6, 2437 MHz	-23.15	8
	High Channel 11, 2462 MHz	-25.683	8
			Results

POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-14.201	8	Pass			

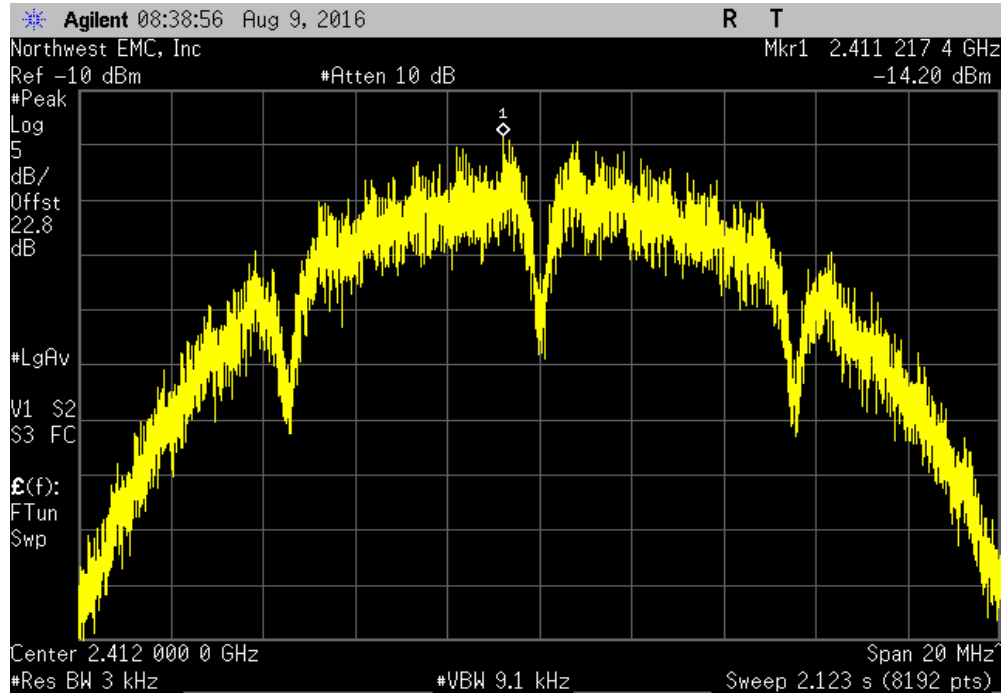


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-13.534	8	Pass			

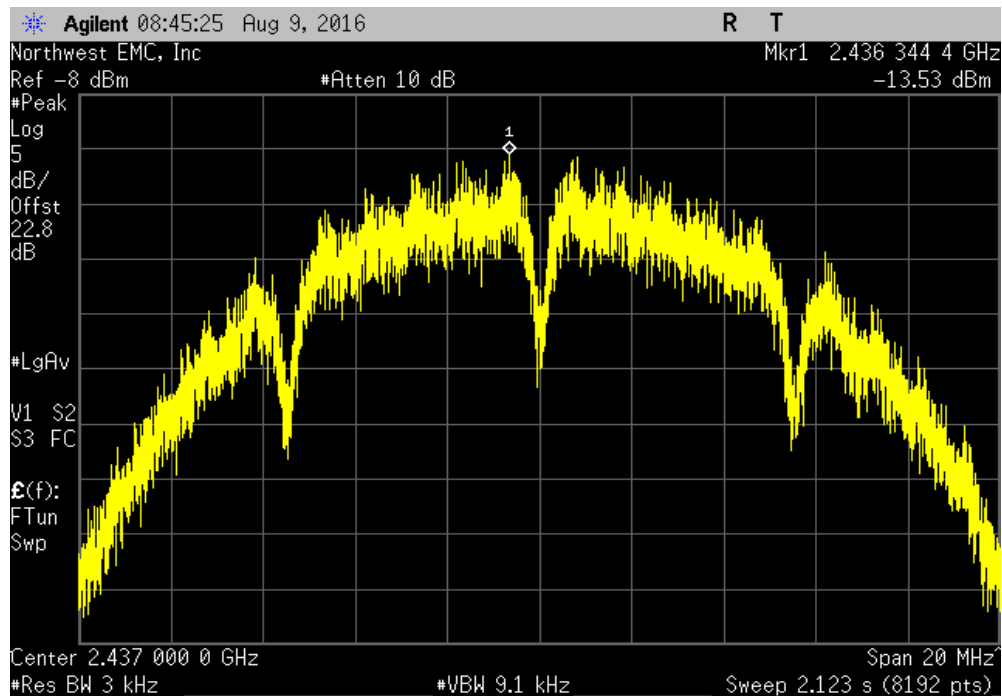


POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-14.433	8	Pass			

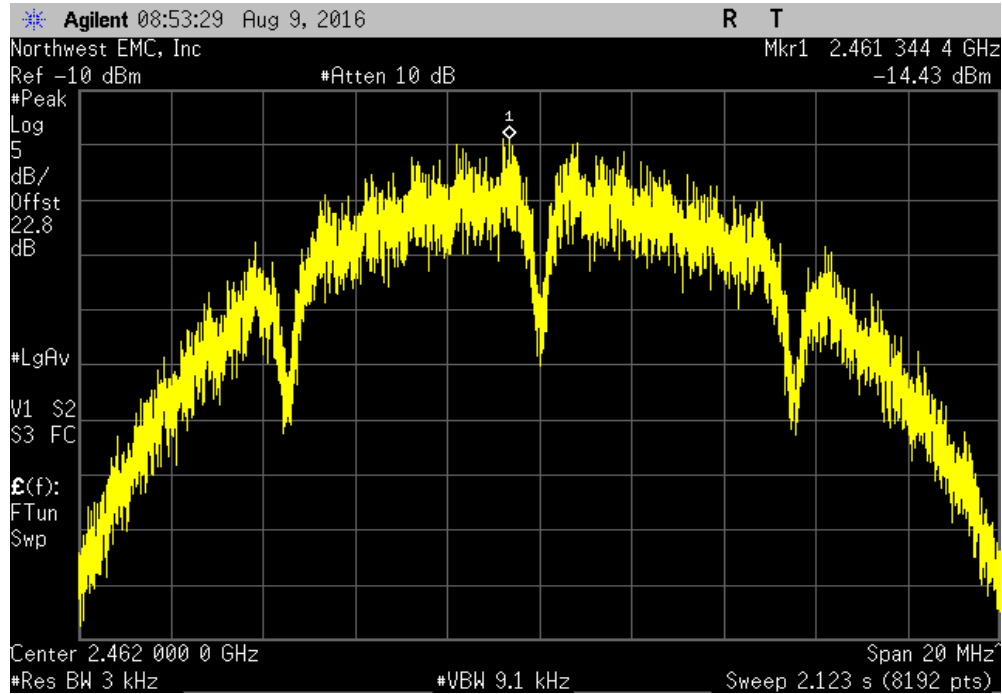


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-13.79	8	Pass			

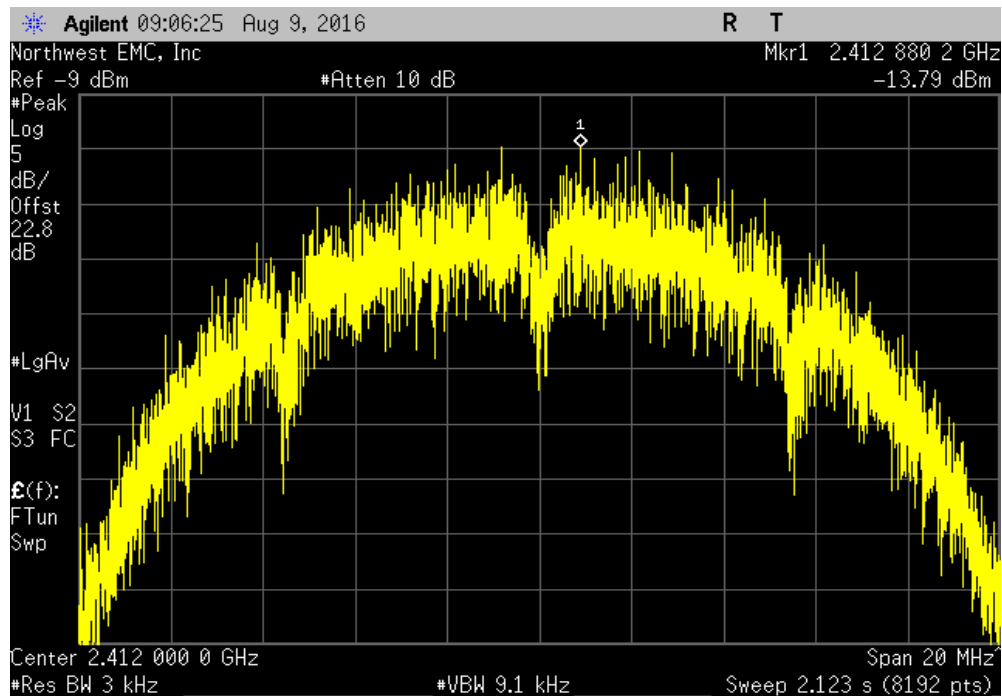


POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-13.127	8	Pass			

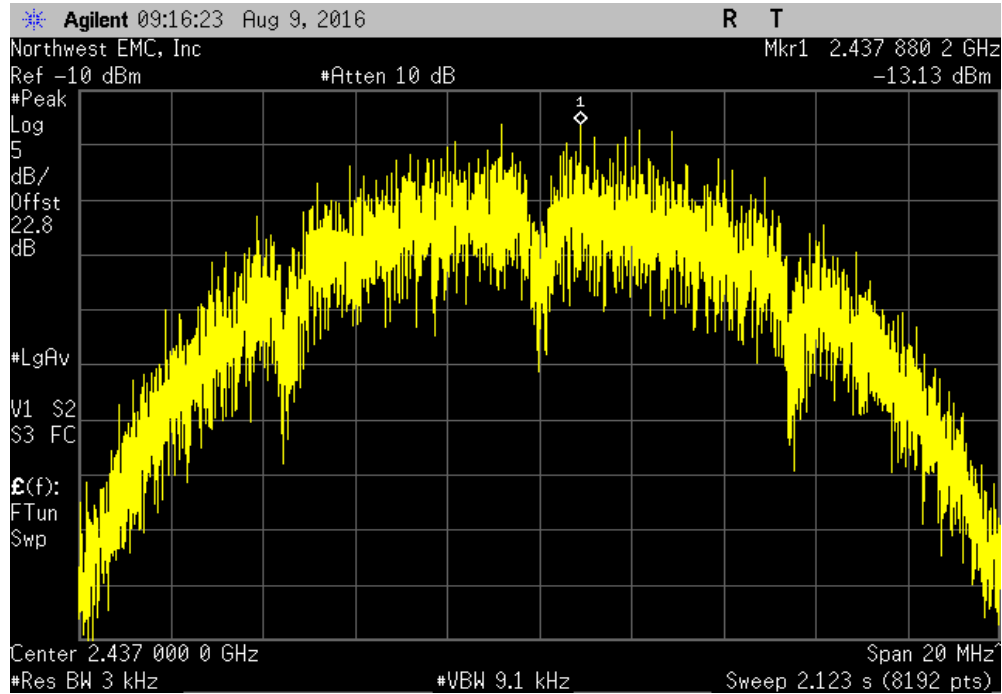


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-14.119	8	Pass			

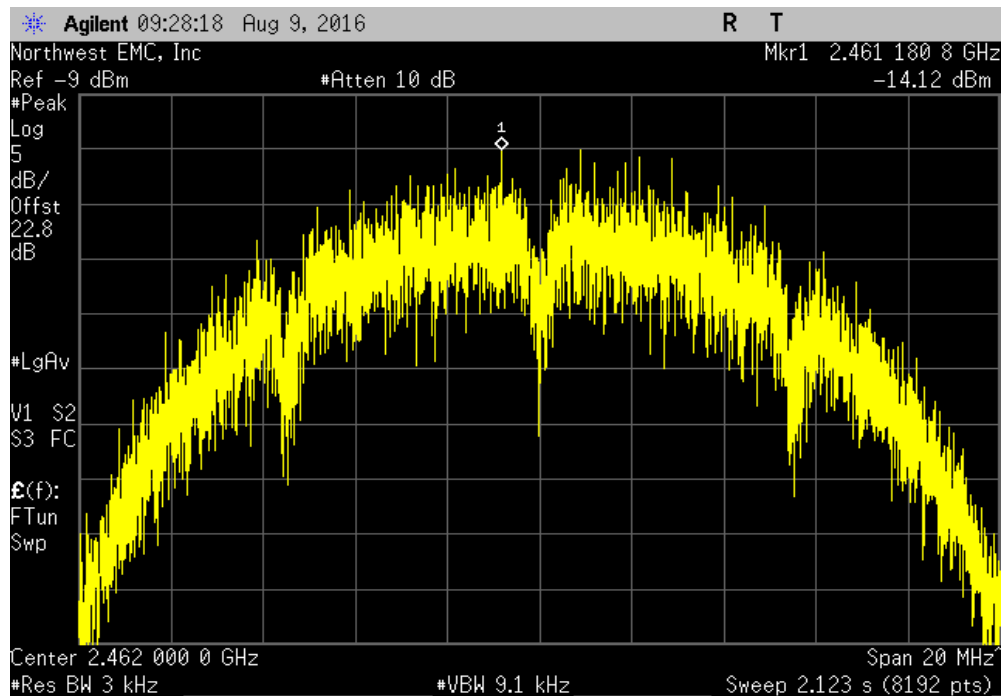

POWER SPECTRAL DENSITY


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz

	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-20.272	8	Pass

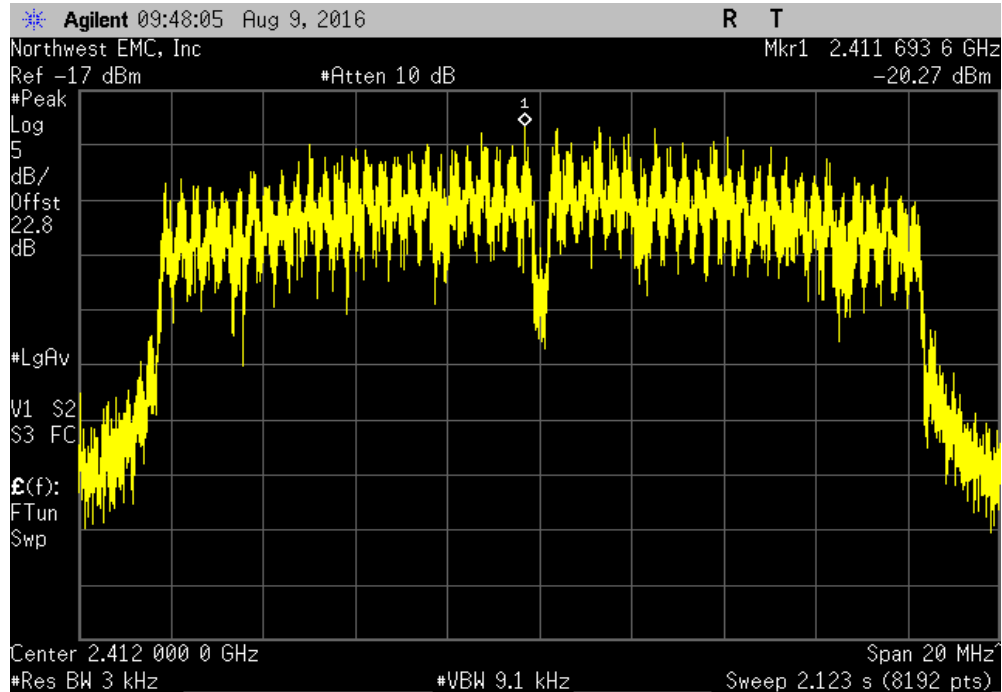


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz

	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-15.461	8	Pass

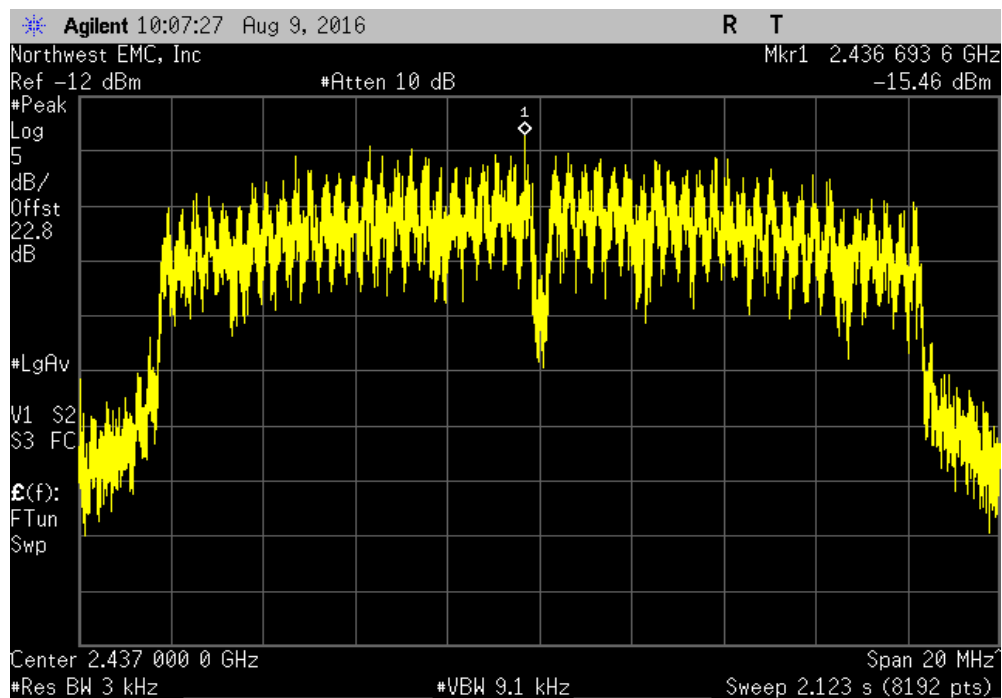


POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-19.847	8	Pass			

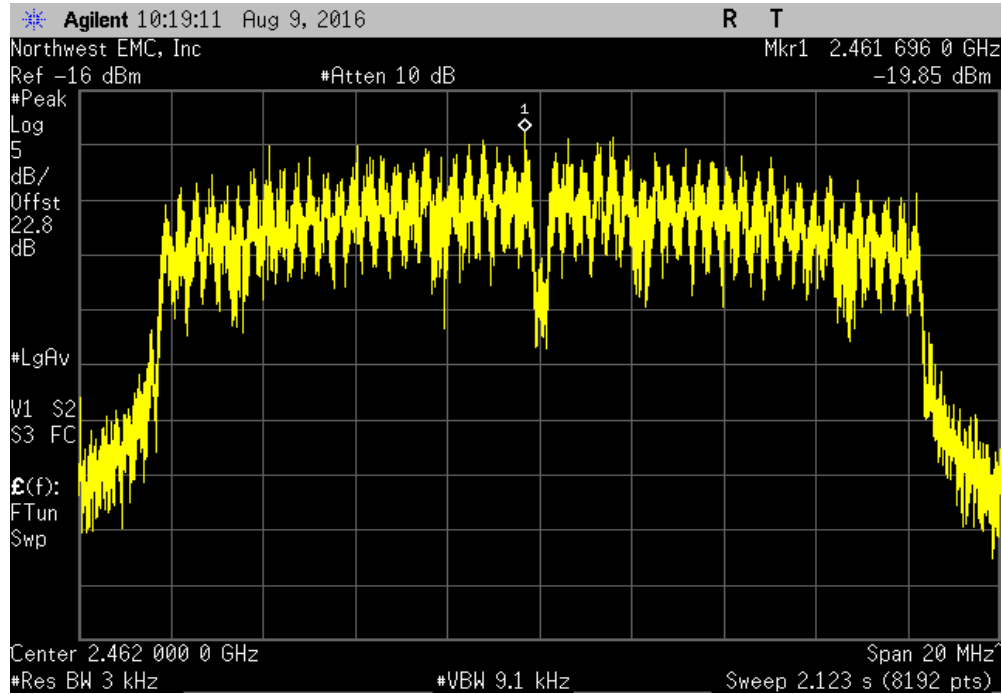


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-25.186	8	Pass			

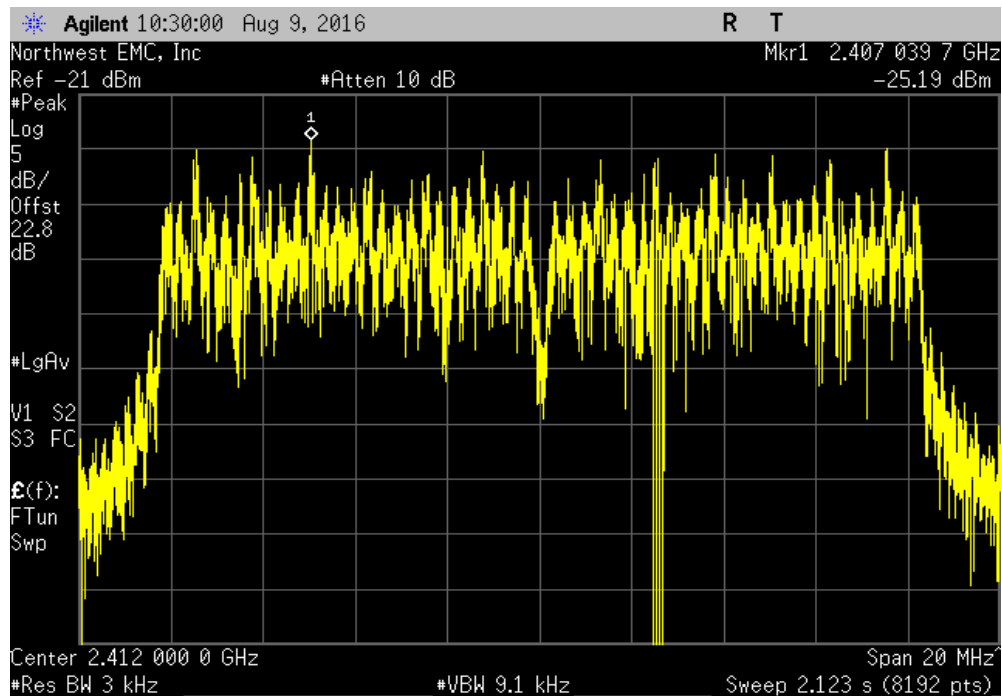


POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-21.19	8	Pass			

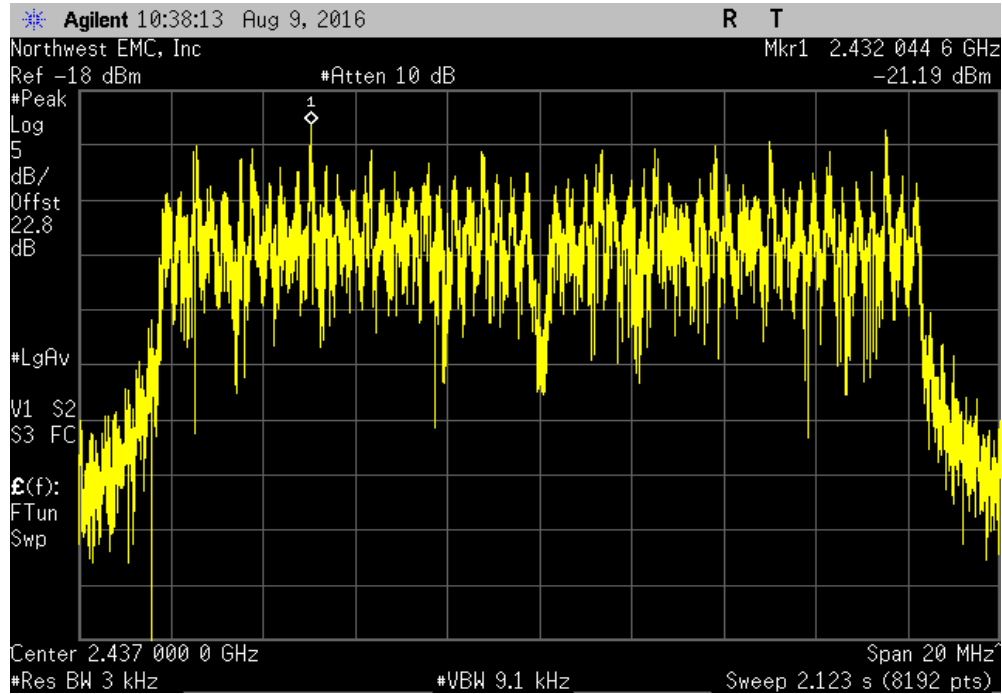


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-25.151	8	Pass			

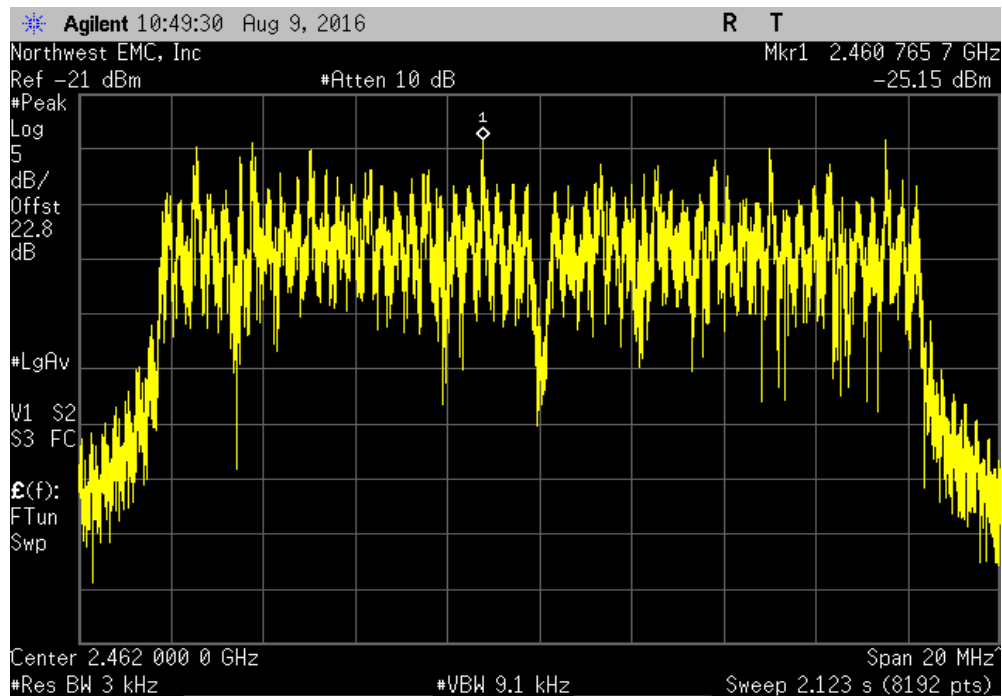


POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-25.143	8	Pass			

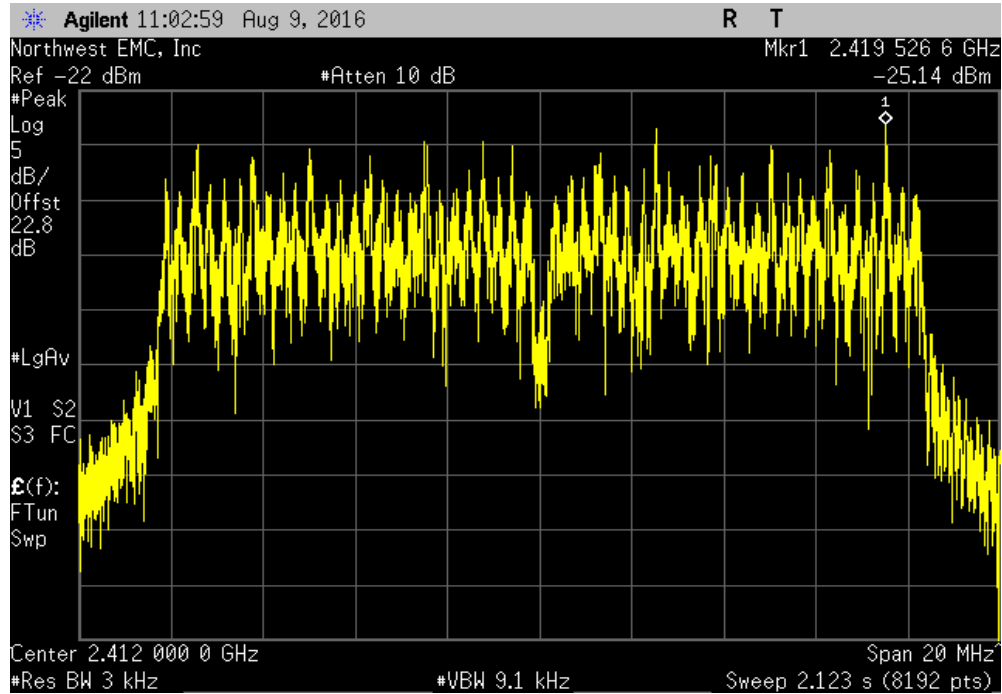


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-23.15	8	Pass			

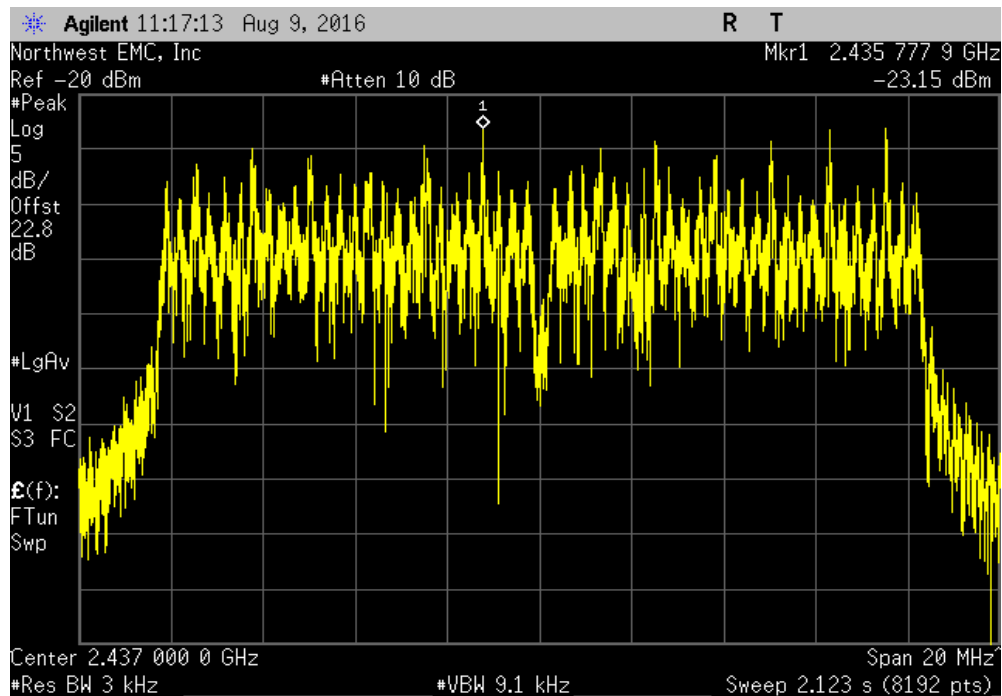

POWER SPECTRAL DENSITY

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
			Value	Limit		
			dBm/3kHz	< dBm/3kHz	Results	
			-25.683	8	Pass	

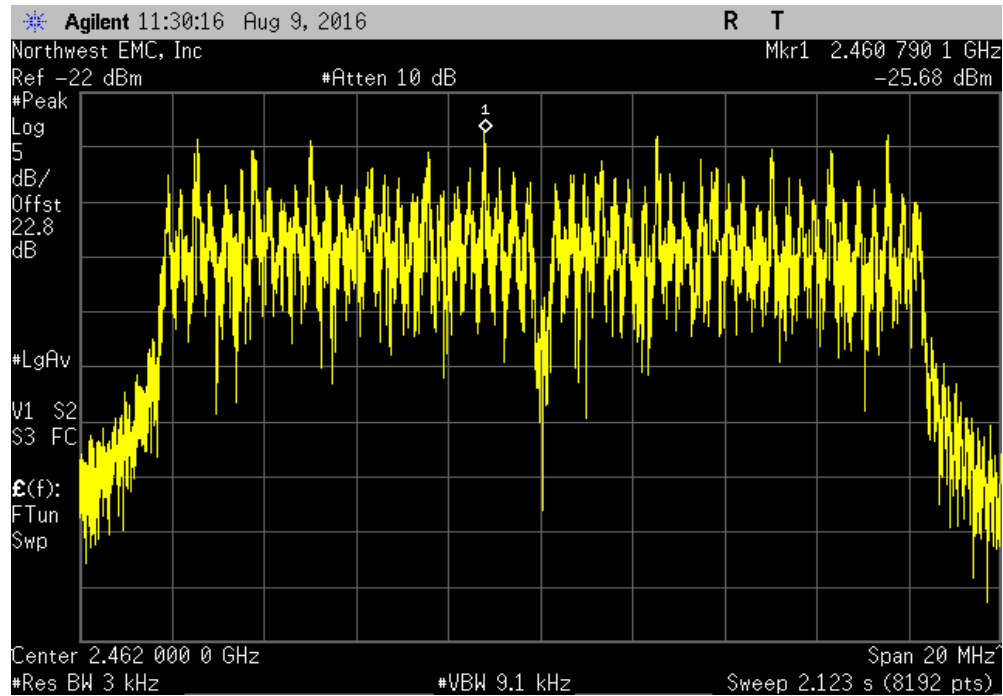

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran	Power: USB Powered	Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = 0.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	4	Signature 	
		Value (dBc)	Limit ≤ (dBc)
2400 MHz - 2483.5 MHz Band			
802.11(b) 1 Mbps			
	Low Channel 1, 2412 MHz	-35.39	-30
	High Channel 11, 2462 MHz	-55.14	-30
802.11(b) 11 Mbps			
	Low Channel 1, 2412 MHz	-34.38	-30
	High Channel 11, 2462 MHz	-52.15	-30
802.11(g) 6 Mbps			
	Low Channel 1, 2412 MHz	-32.46	-30
	High Channel 11, 2462 MHz	-47.91	-30
802.11(g) 36 Mbps			
	Low Channel 1, 2412 MHz	-34.47	-30
	High Channel 11, 2462 MHz	-46.66	-30
802.11(g) 54 Mbps			
	Low Channel 1, 2412 MHz	-32.25	-30
	High Channel 11, 2462 MHz	-46.52	-30
			Result
			Pass
			Pass
			Pass
			Pass
			Pass
			Pass
			Pass

BAND EDGE COMPLIANCE

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-35.39	-30	Pass

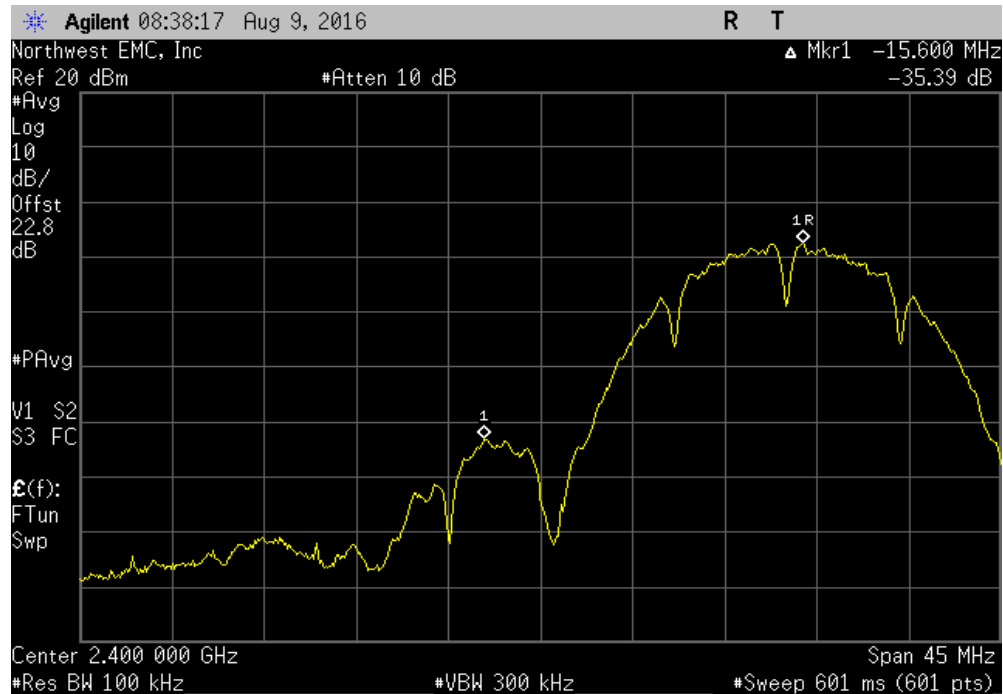


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-55.14	-30	Pass

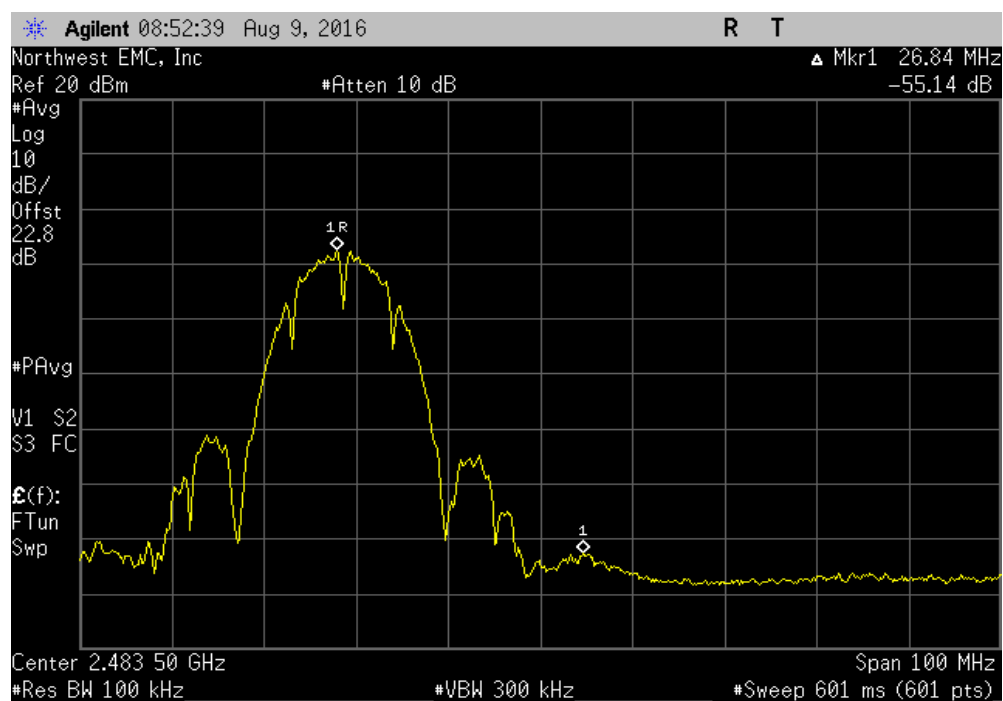


BAND EDGE COMPLIANCE

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-34.38	-30	Pass

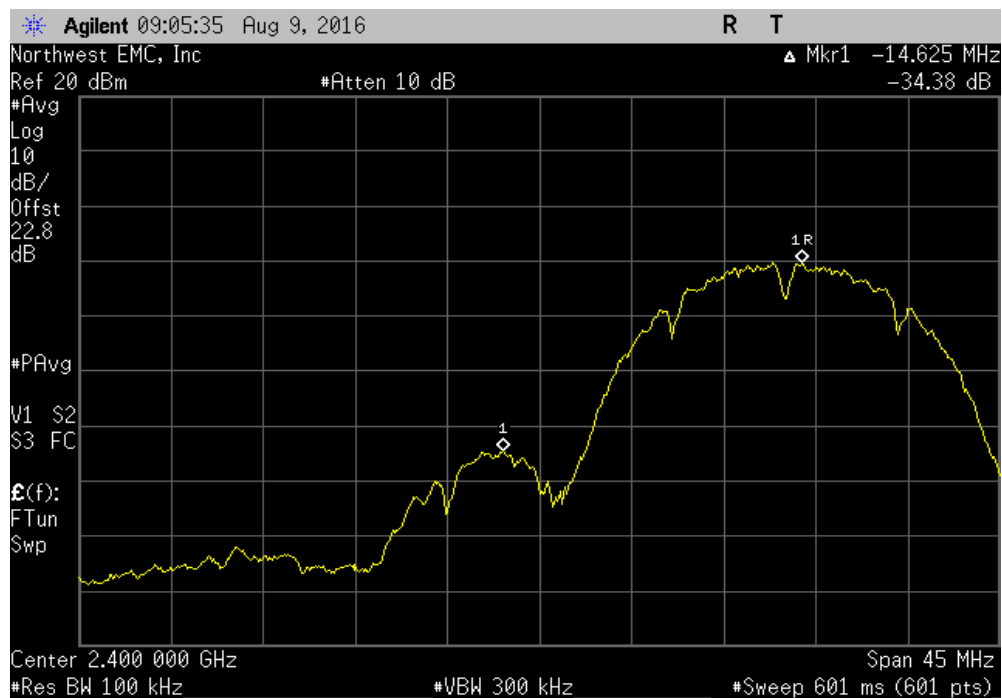


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-52.15	-30	Pass

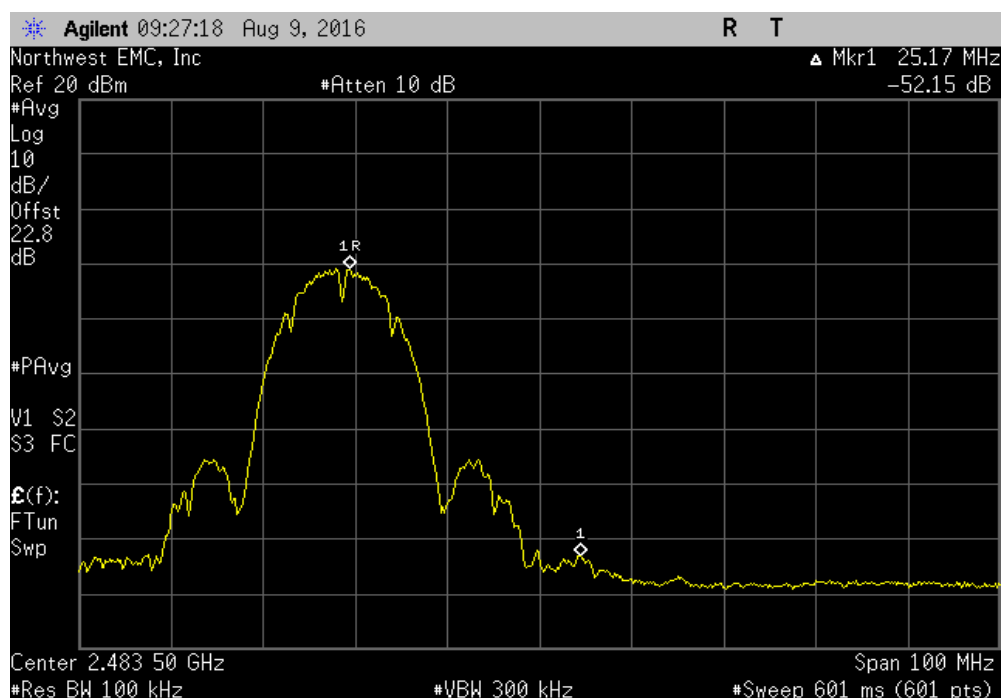


BAND EDGE COMPLIANCE

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-32.46	-30	Pass

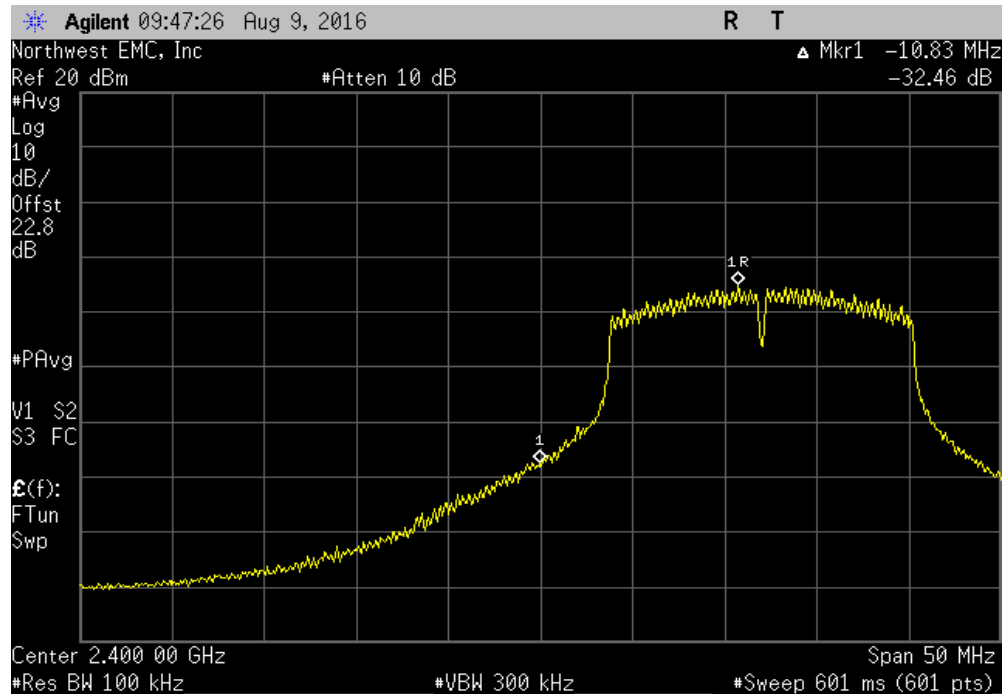


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-47.91	-30	Pass

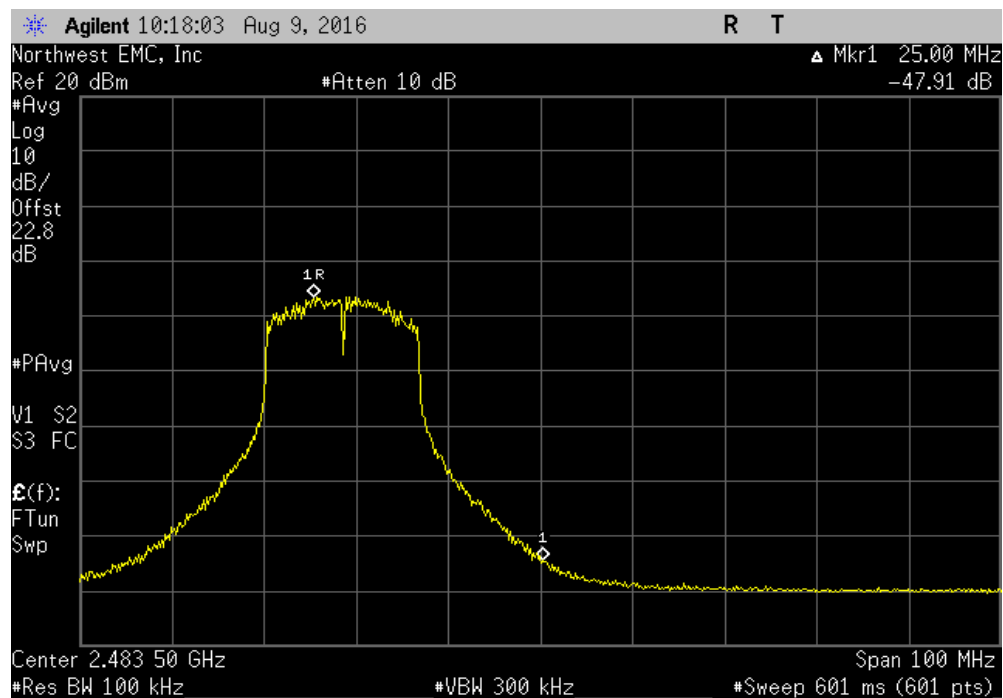


BAND EDGE COMPLIANCE

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-34.47	-30	Pass

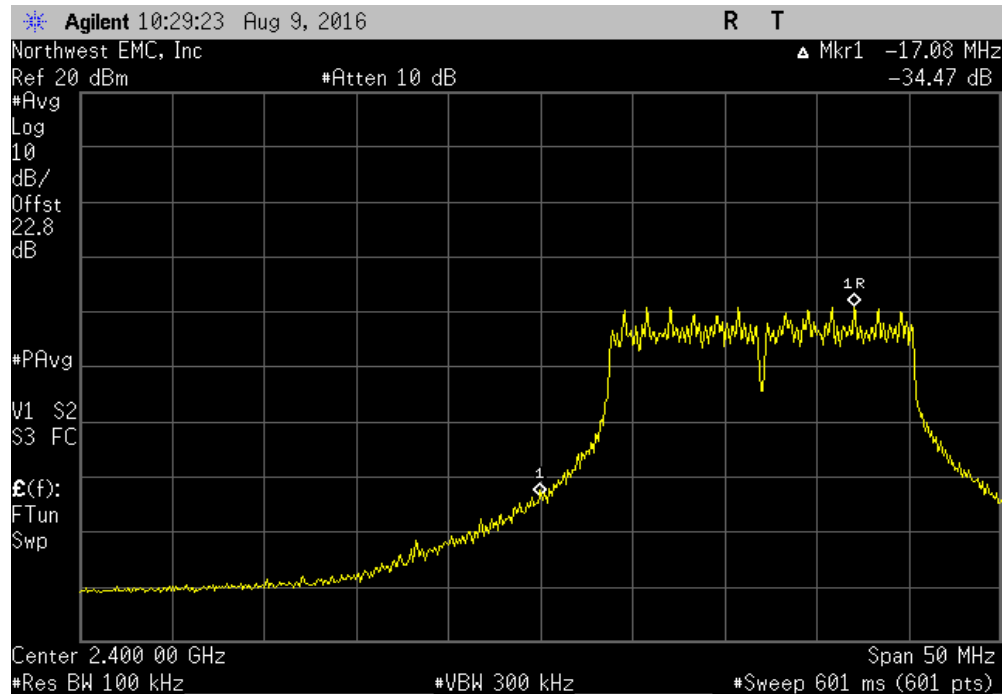


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-46.66	-30	Pass

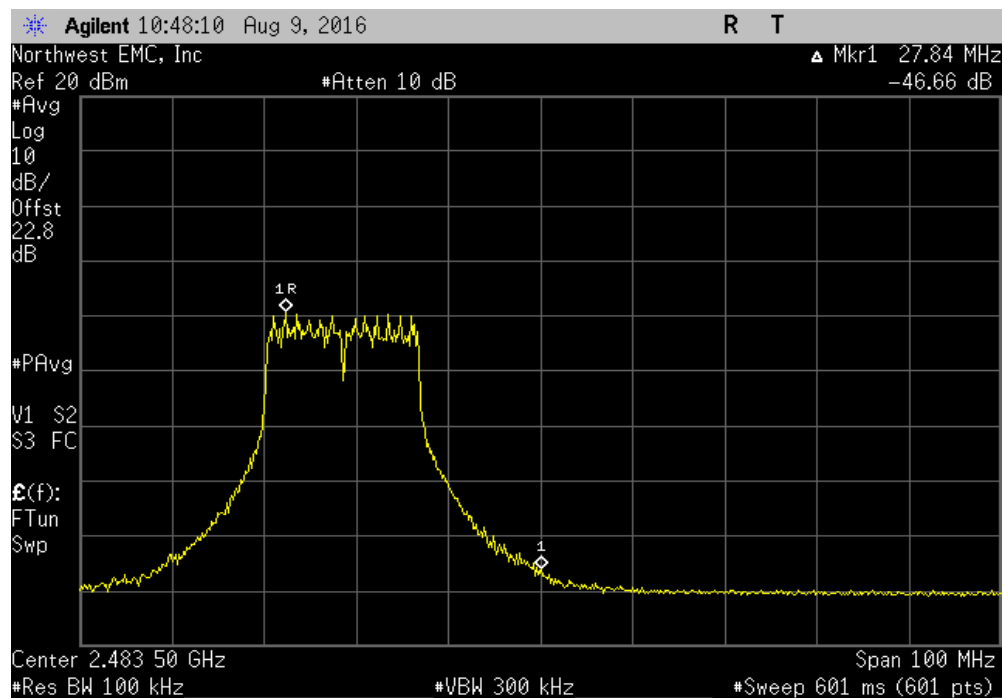

BAND EDGE COMPLIANCE


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz

				Value (dBc)	Limit ≤ (dBc)	Result
				-32.25	-30	Pass

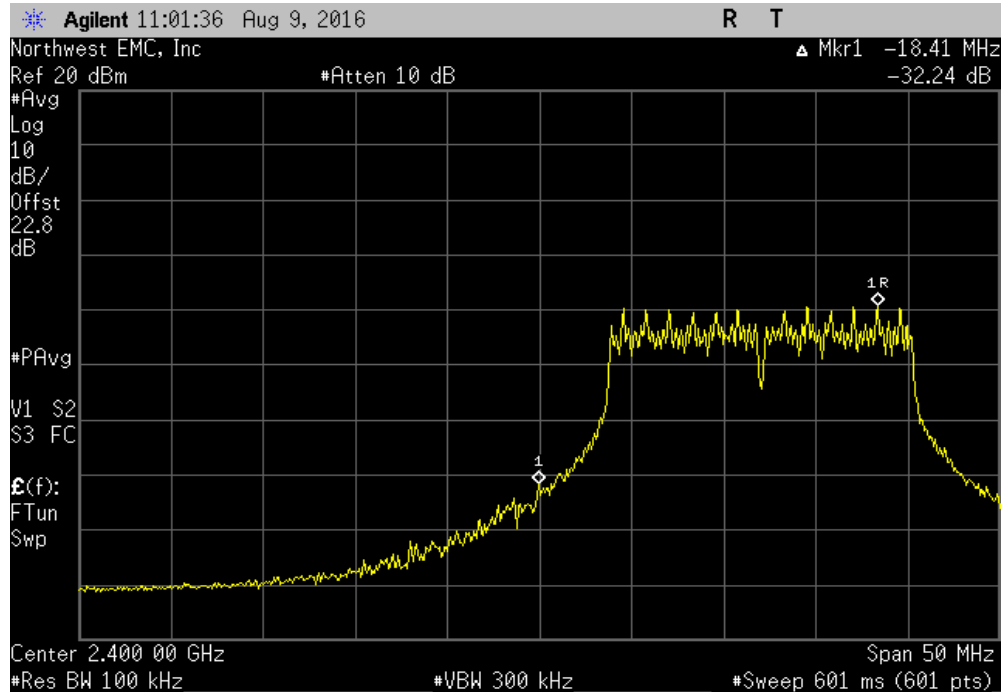

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz

				Value (dBc)	Limit ≤ (dBc)	Result
				-46.52	-30	Pass

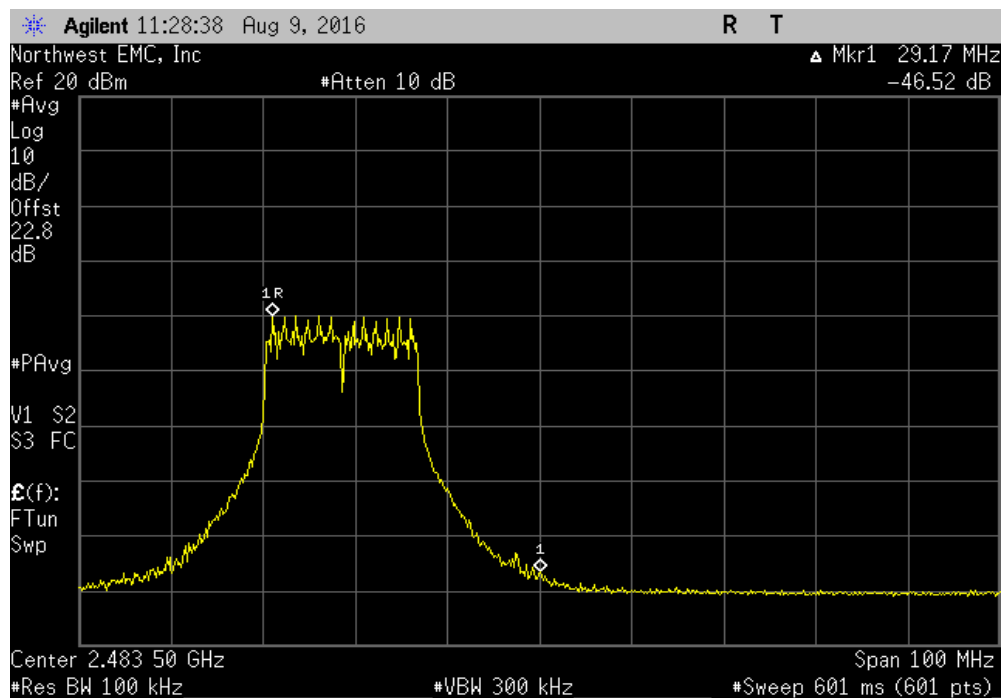

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran	Power: USB Powered	Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = 0.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	4	Signature 	
		Frequency Range	Max Value (dBc)
			Limit ≤ (dBc)
			Result
2400 MHz - 2483.5 MHz Band			
802.11(b) 1 Mbps			
	Low Channel 1, 2412 MHz	Fundamental	N/A
	Low Channel 1, 2412 MHz	30 MHz - 12.5 GHz	-50.37
	Low Channel 1, 2412 MHz	12.5 GHz - 25 GHz	-52.65
	Mid Channel 6, 2437 MHz	Fundamental	N/A
	Mid Channel 6, 2437 MHz	30 MHz - 12.5 GHz	-54.53
	Mid Channel 6, 2437 MHz	12.5 GHz - 25 GHz	-53.37
	High Channel 11, 2462 MHz	Fundamental	N/A
	High Channel 11, 2462 MHz	30 MHz - 12.5 GHz	-53.35
	High Channel 11, 2462 MHz	12.5 GHz - 25 GHz	-53.53
802.11(b) 11 Mbps			
	Low Channel 1, 2412 MHz	Fundamental	N/A
	Low Channel 1, 2412 MHz	30 MHz - 12.5 GHz	-51.79
	Low Channel 1, 2412 MHz	12.5 GHz - 25 GHz	-52.08
	Mid Channel 6, 2437 MHz	Fundamental	N/A
	Mid Channel 6, 2437 MHz	30 MHz - 12.5 GHz	-53.17
	Mid Channel 6, 2437 MHz	12.5 GHz - 25 GHz	-52.78
	High Channel 11, 2462 MHz	Fundamental	N/A
	High Channel 11, 2462 MHz	30 MHz - 12.5 GHz	-51.27
	High Channel 11, 2462 MHz	12.5 GHz - 25 GHz	-51.47
802.11(g) 6 Mbps			
	Low Channel 1, 2412 MHz	Fundamental	N/A
	Low Channel 1, 2412 MHz	30 MHz - 12.5 GHz	-45.82
	Low Channel 1, 2412 MHz	12.5 GHz - 25 GHz	-48.23
	Mid Channel 6, 2437 MHz	Fundamental	N/A
	Mid Channel 6, 2437 MHz	30 MHz - 12.5 GHz	-54.68
	Mid Channel 6, 2437 MHz	12.5 GHz - 25 GHz	-52.39
	High Channel 11, 2462 MHz	Fundamental	N/A
	High Channel 11, 2462 MHz	30 MHz - 12.5 GHz	-52.26
	High Channel 11, 2462 MHz	12.5 GHz - 25 GHz	-48.61
802.11(g) 36 Mbps			
	Low Channel 1, 2412 MHz	Fundamental	N/A
	Low Channel 1, 2412 MHz	30 MHz - 12.5 GHz	-43.66
	Low Channel 1, 2412 MHz	12.5 GHz - 25 GHz	-45.24
	Mid Channel 6, 2437 MHz	Fundamental	N/A
	Mid Channel 6, 2437 MHz	30 MHz - 12.5 GHz	-52.23
	Mid Channel 6, 2437 MHz	12.5 GHz - 25 GHz	-49.22
	High Channel 11, 2462 MHz	Fundamental	N/A
	High Channel 11, 2462 MHz	30 MHz - 12.5 GHz	-49.19
	High Channel 11, 2462 MHz	12.5 GHz - 25 GHz	-46.03
802.11(g) 54 Mbps			
	Low Channel 1, 2412 MHz	Fundamental	N/A
	Low Channel 1, 2412 MHz	30 MHz - 12.5 GHz	-48.55
	Low Channel 1, 2412 MHz	12.5 GHz - 25 GHz	-45.47
	Mid Channel 6, 2437 MHz	Fundamental	N/A
	Mid Channel 6, 2437 MHz	30 MHz - 12.5 GHz	-49.13
	Mid Channel 6, 2437 MHz	12.5 GHz - 25 GHz	-46.59
	High Channel 11, 2462 MHz	Fundamental	N/A
	High Channel 11, 2462 MHz	30 MHz - 12.5 GHz	-49.66
	High Channel 11, 2462 MHz	12.5 GHz - 25 GHz	-46.45

SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

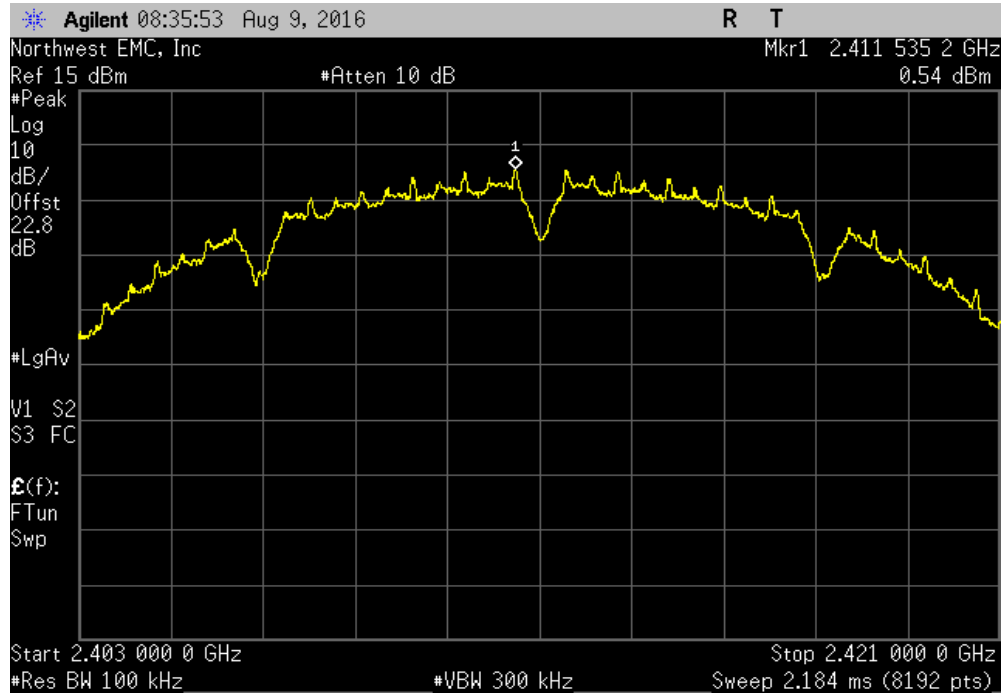


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-50.37		-30	Pass	

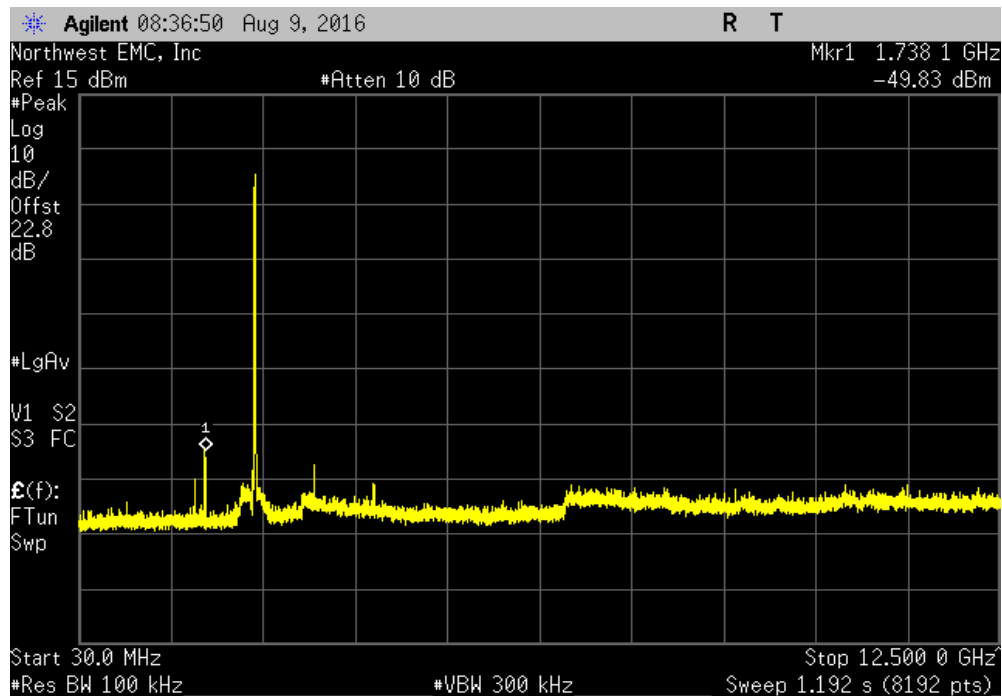


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.65	-30	Pass	

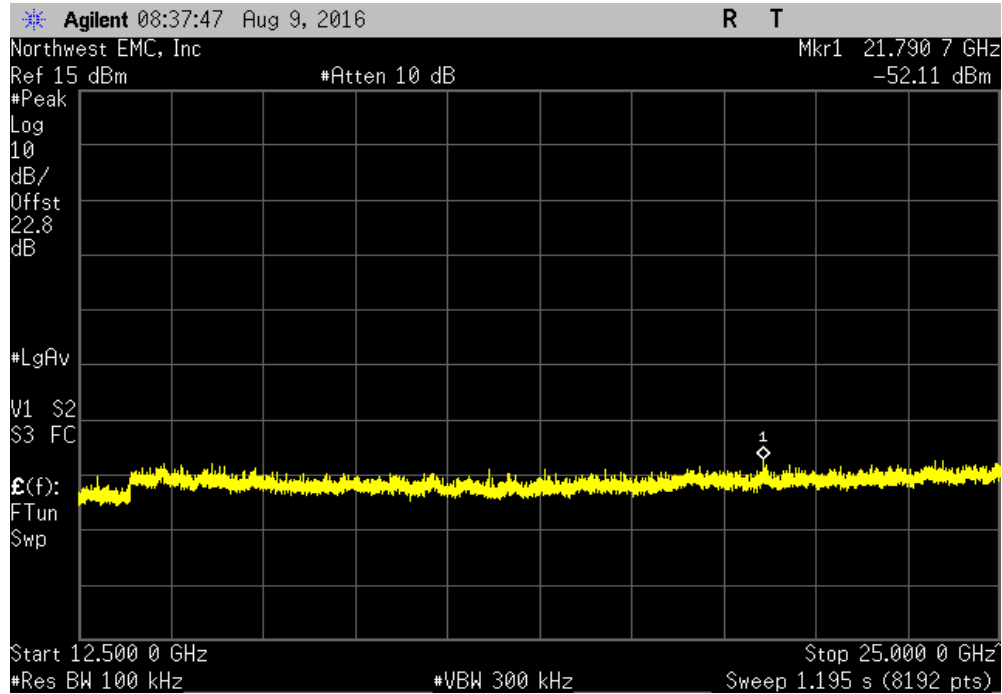


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

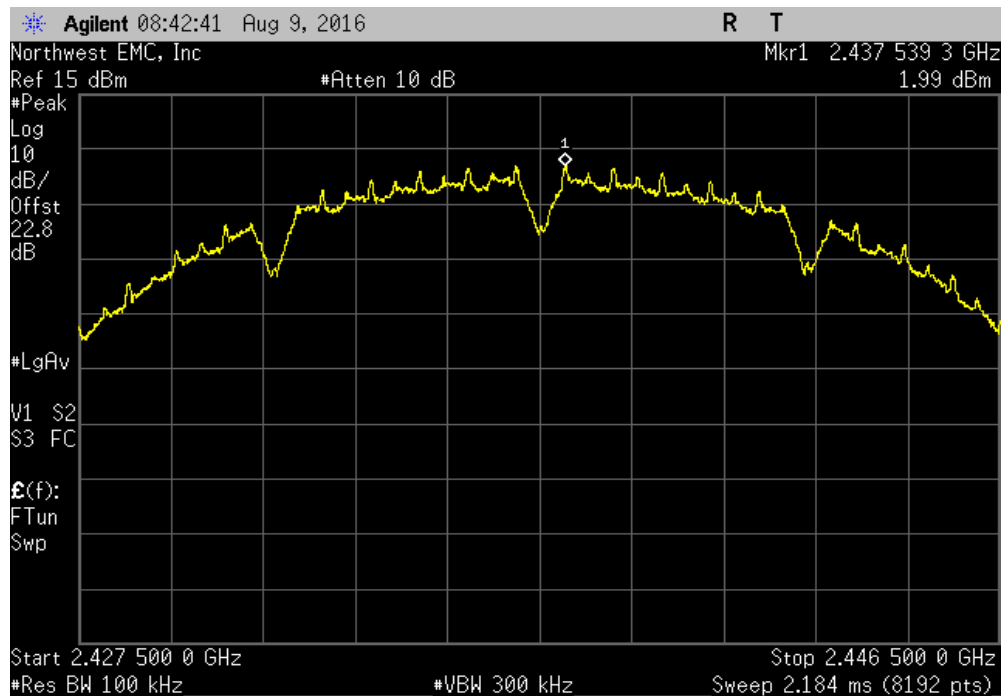


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-54.53	-30	Pass	

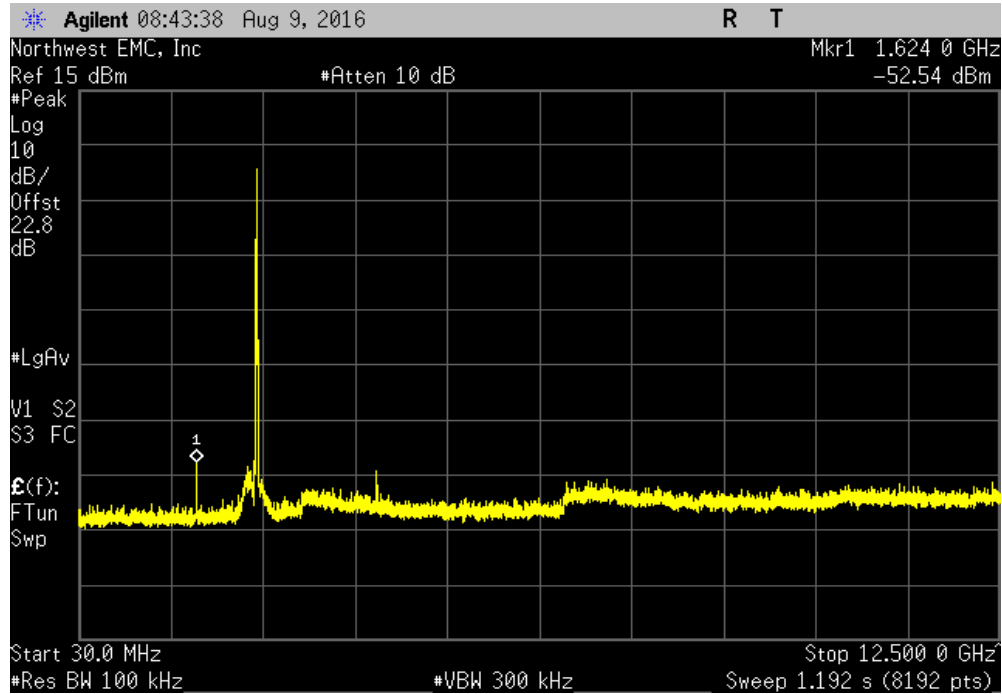


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-53.37	-30	Pass	

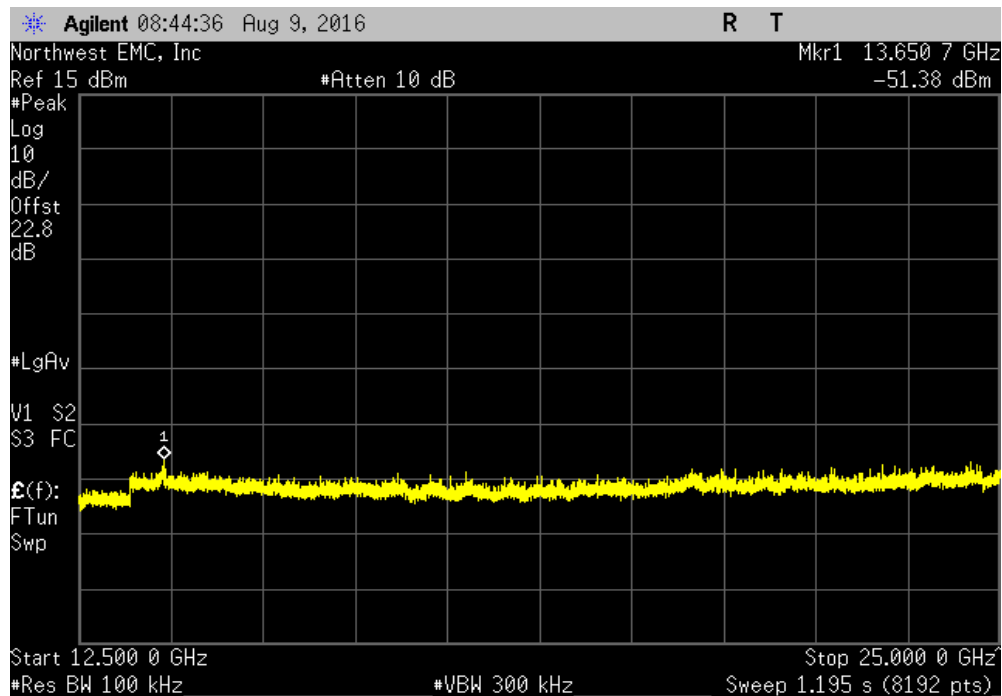


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

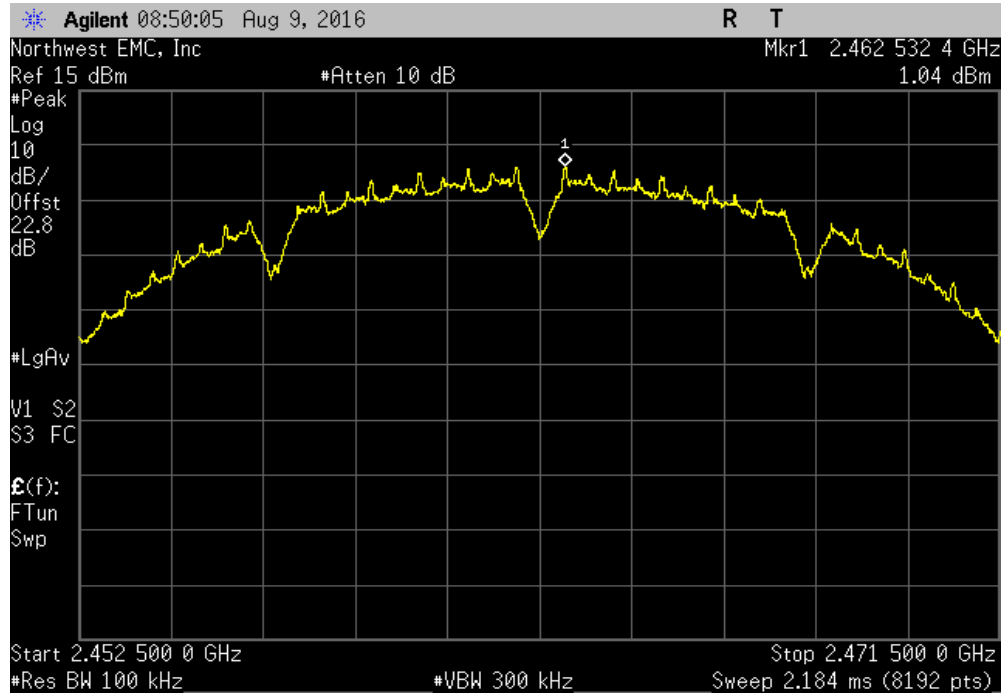


2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-53.35		-30	Pass	

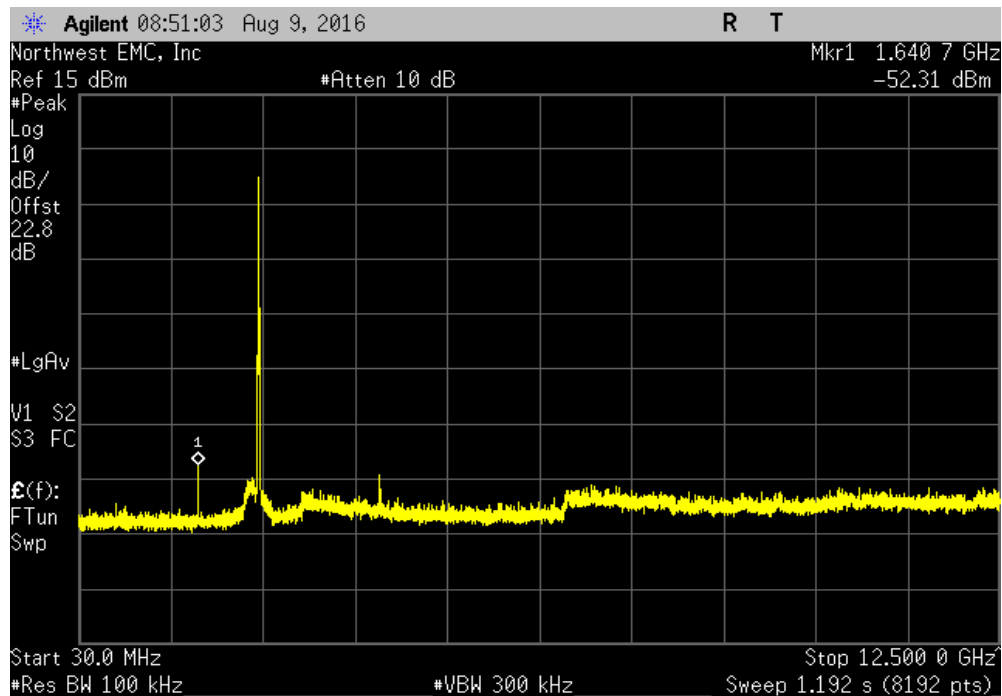


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 1 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-53.53	-30	Pass	

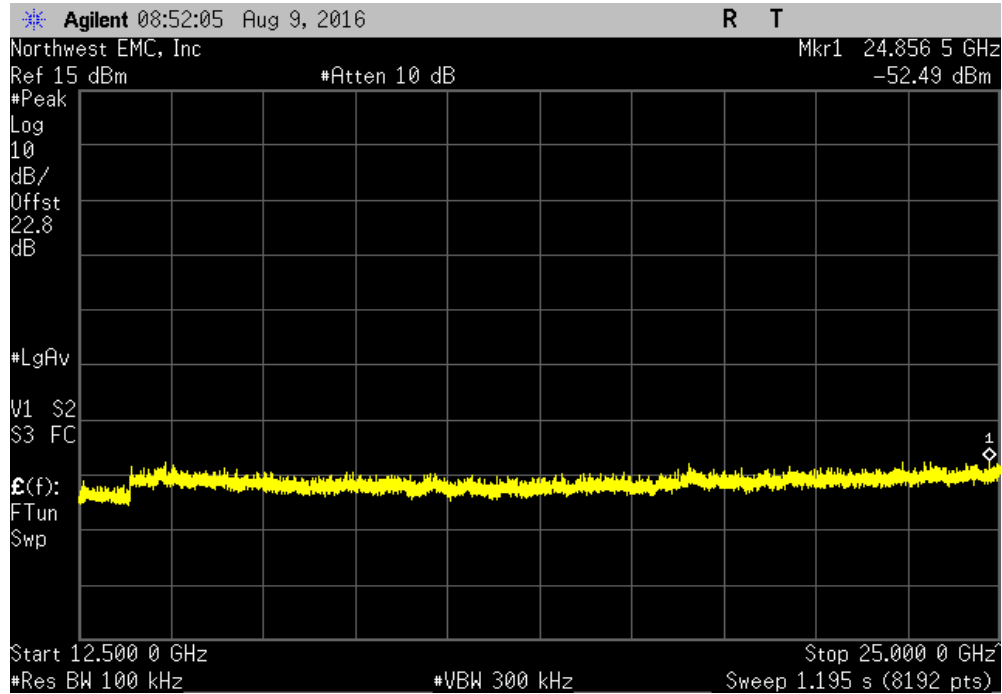


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

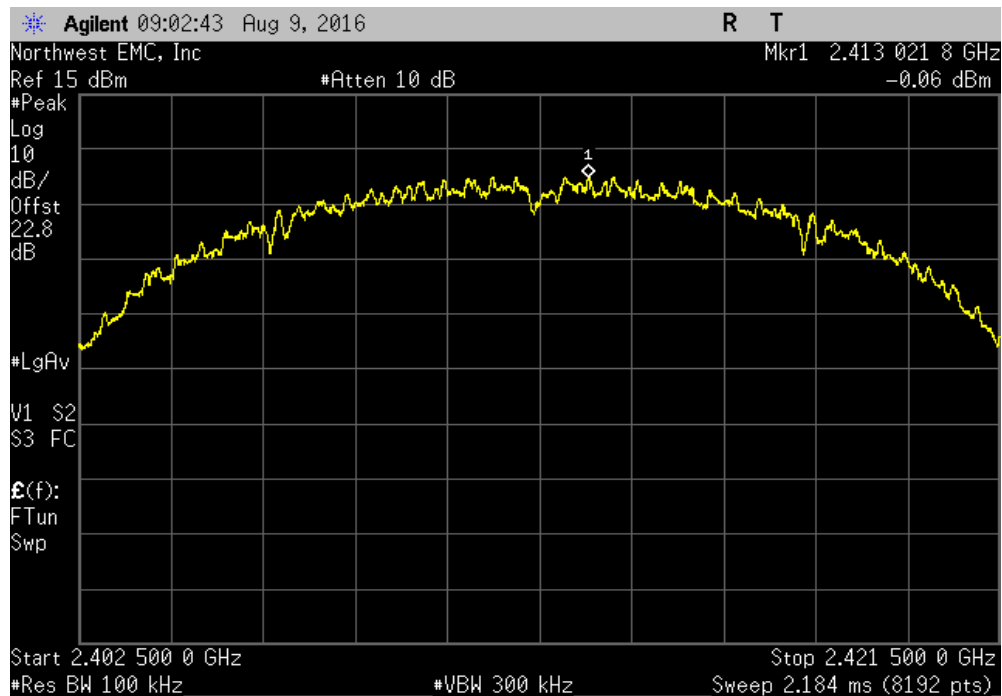


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-51.79	-30	Pass	

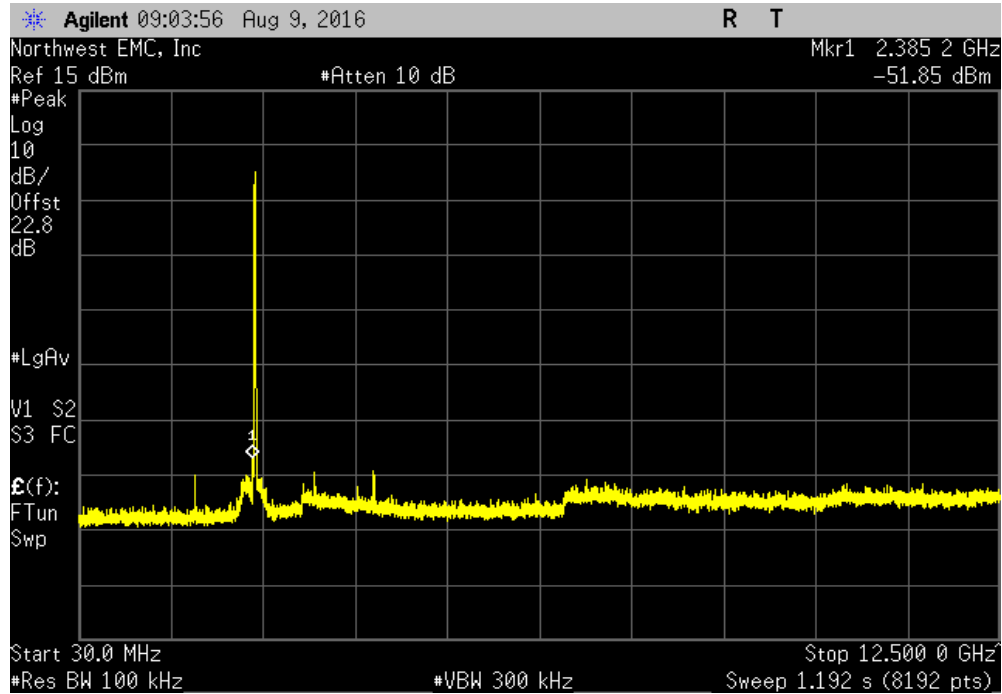


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.08	-30	Pass	

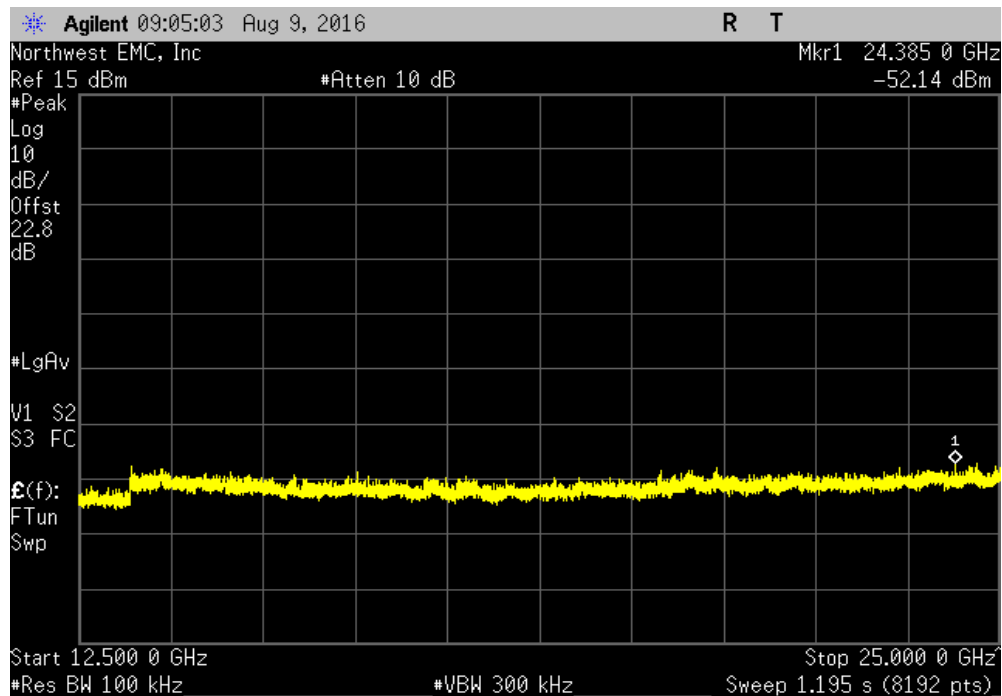


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

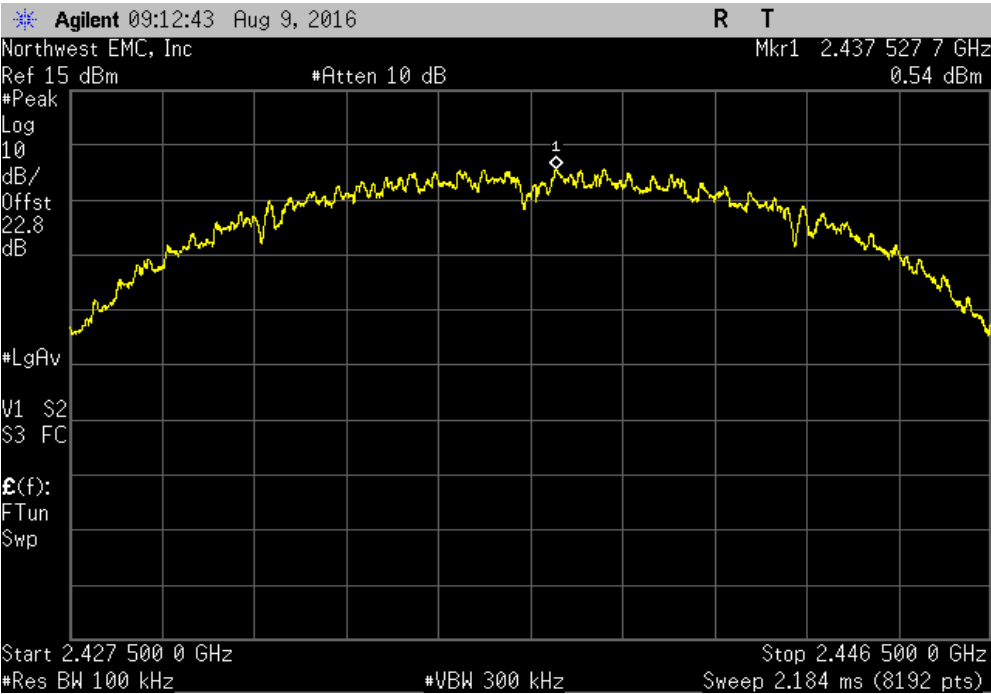


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-53.17		-30	Pass	

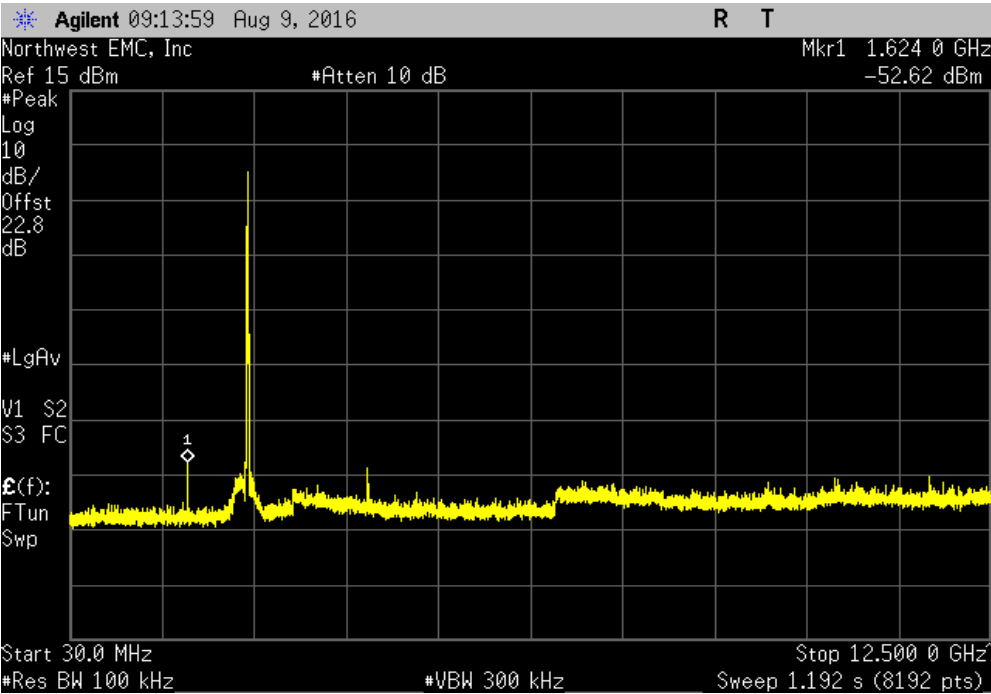


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.78	-30	Pass	

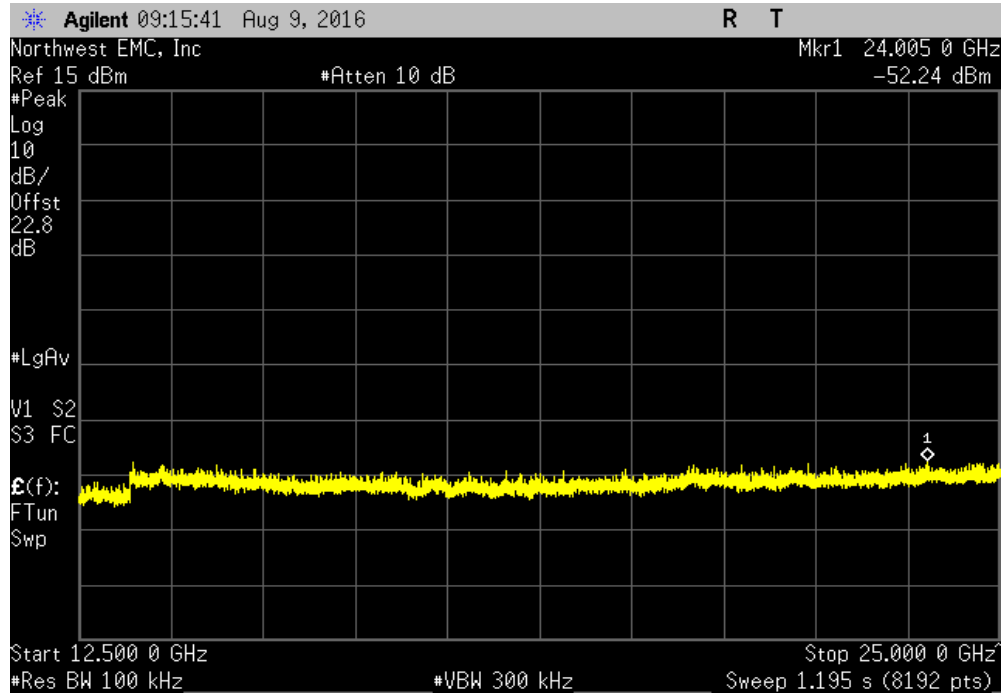


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

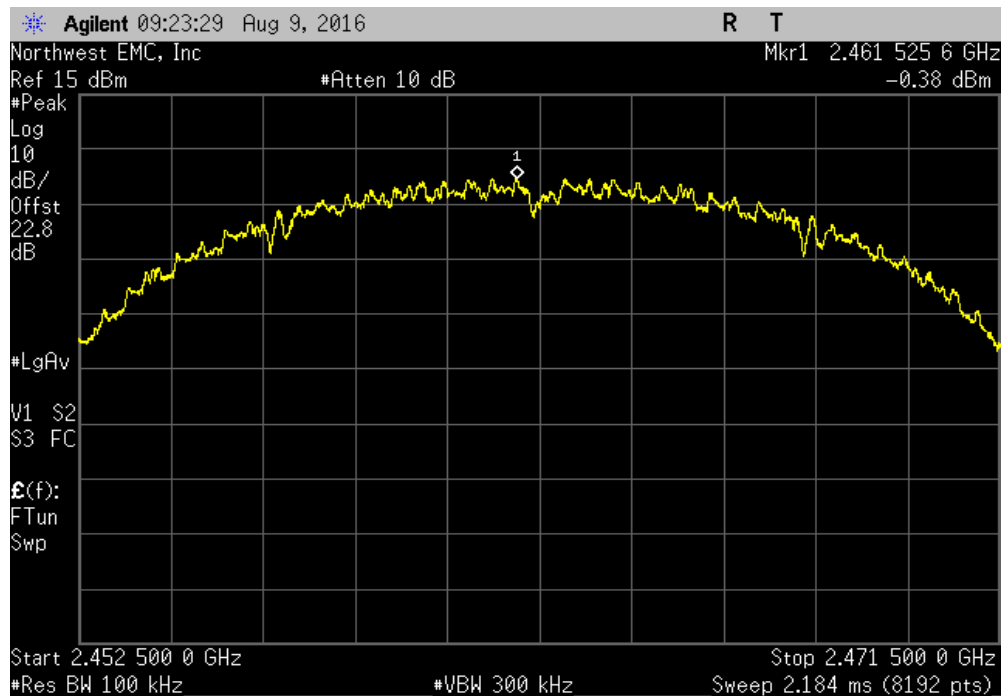


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-51.27	-30	Pass	

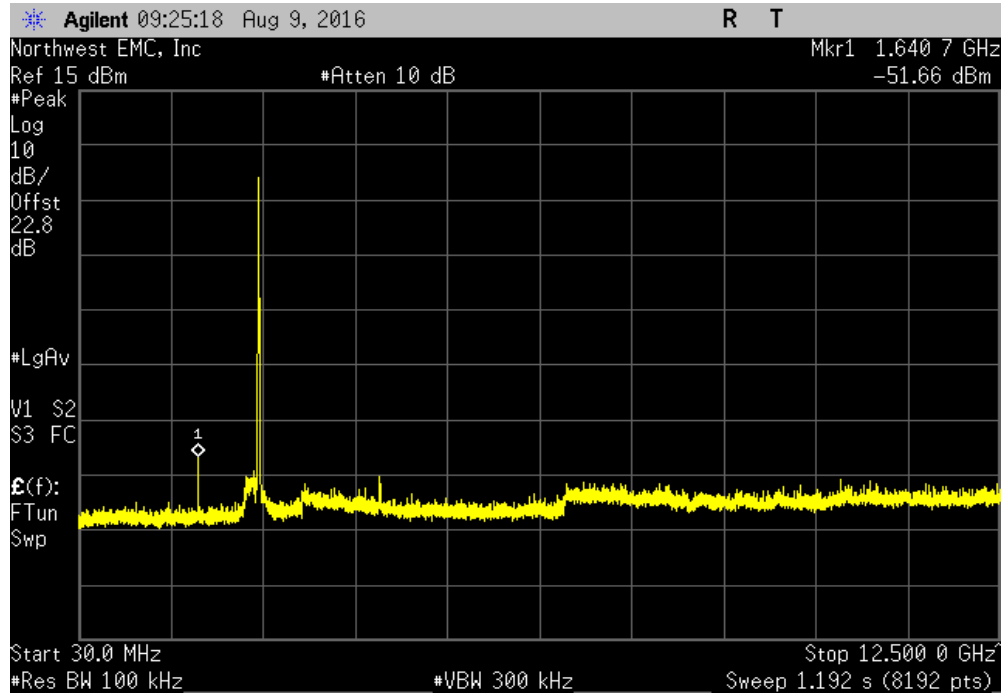


2400 MHz - 2483.5 MHz Band, 802.11(b) 11 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-51.47	-30	Pass	

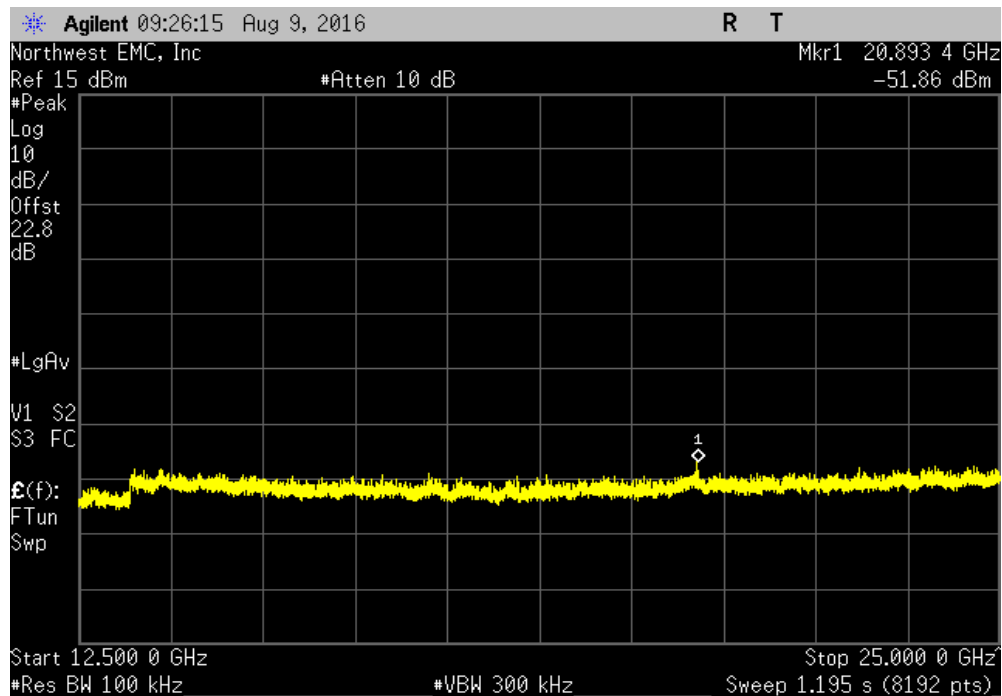


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

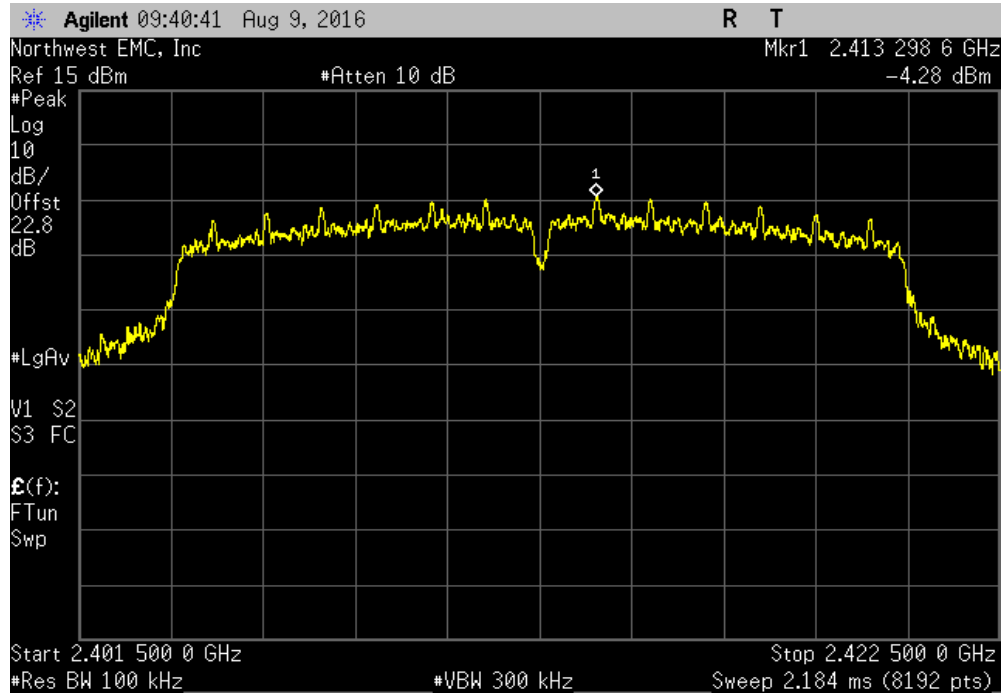


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-45.82		-30	Pass	

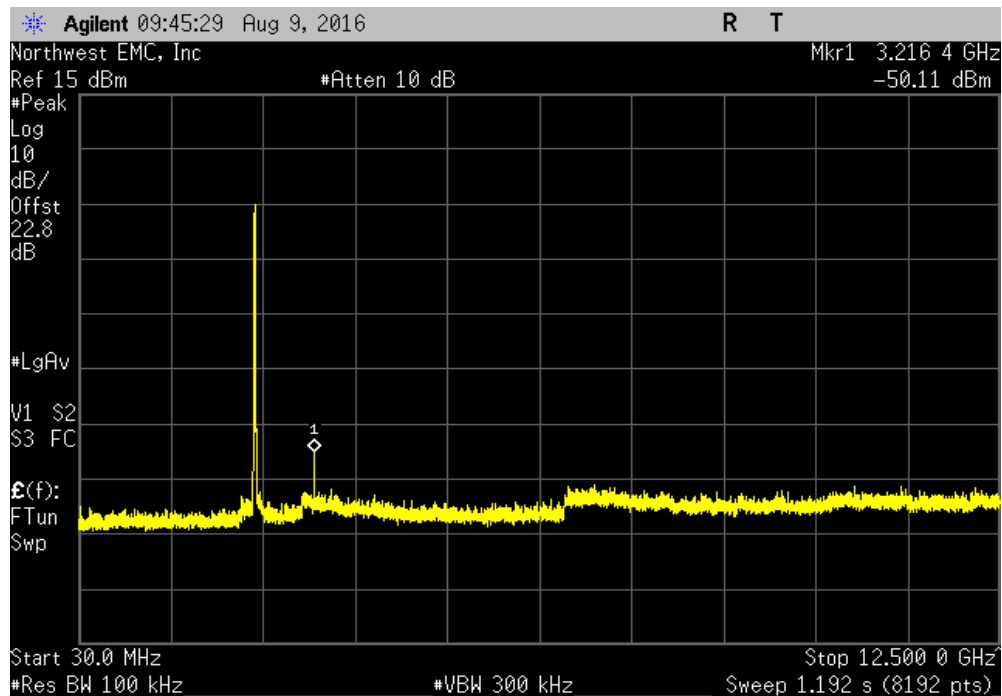


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-48.23	-30	Pass	

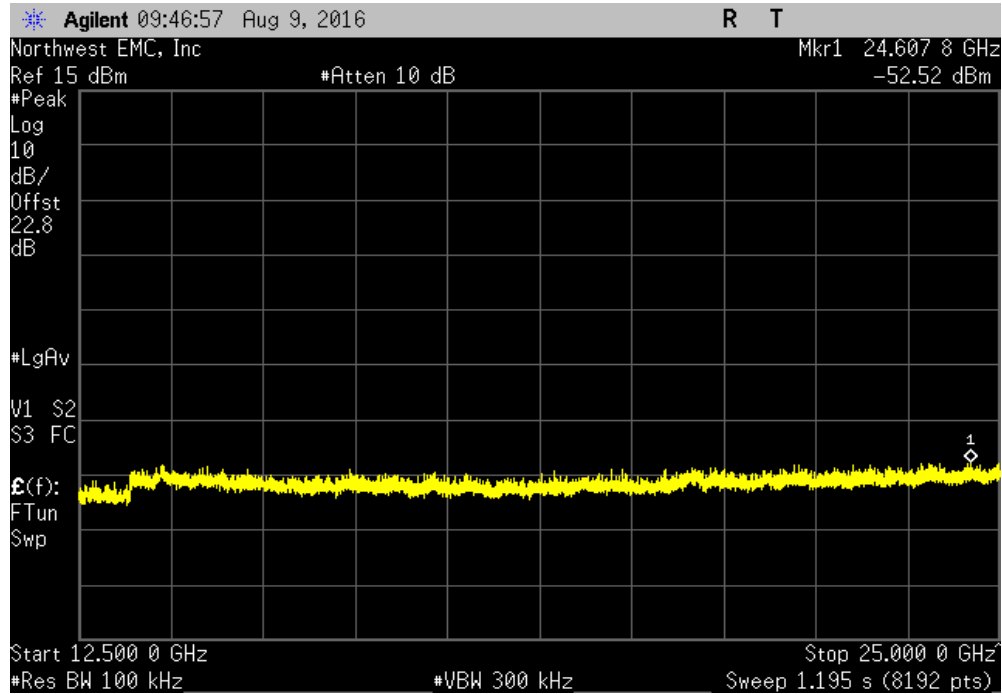


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

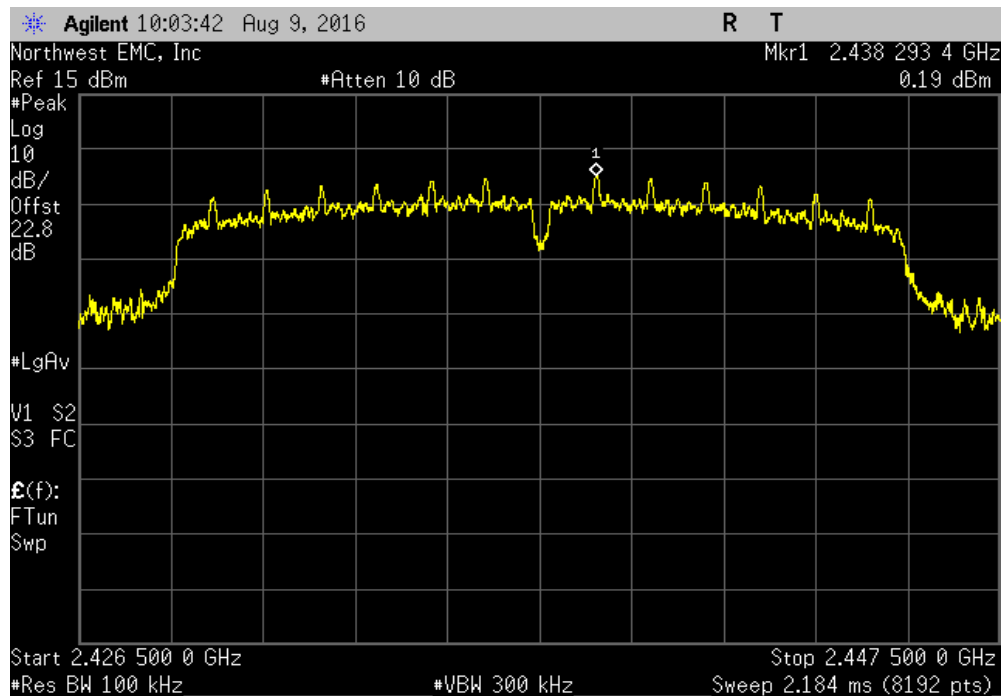


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-54.68	-30	Pass	

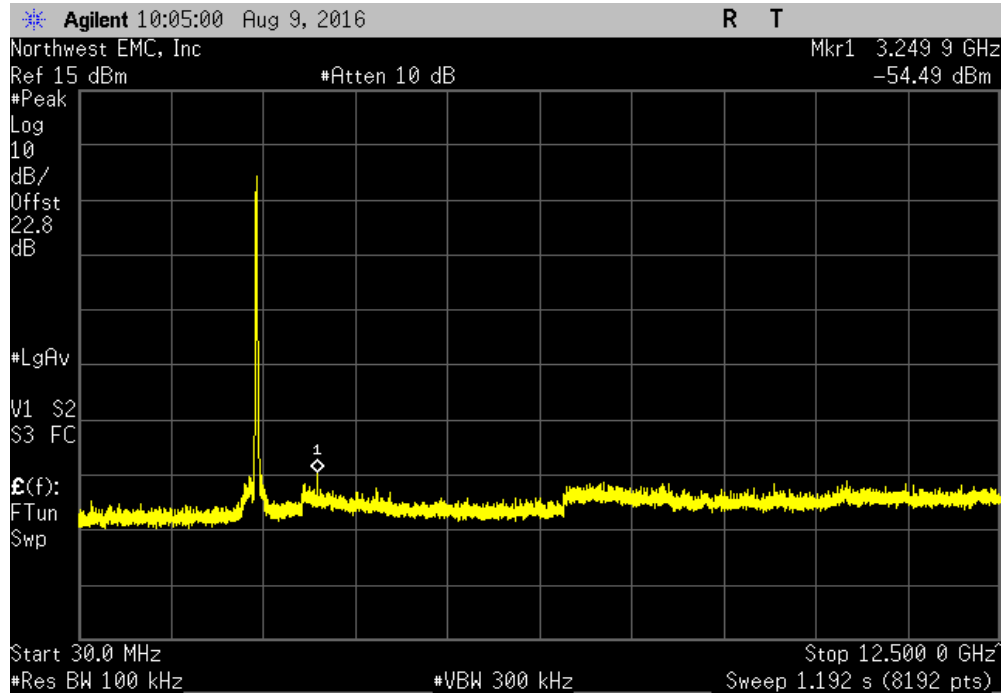


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-52.39	-30	Pass	

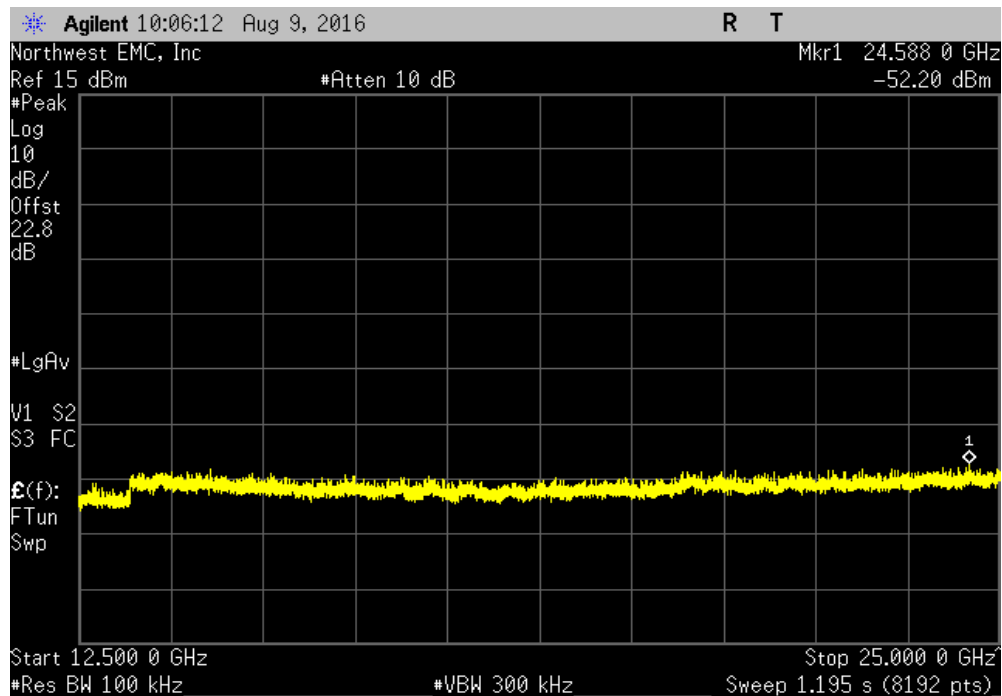


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

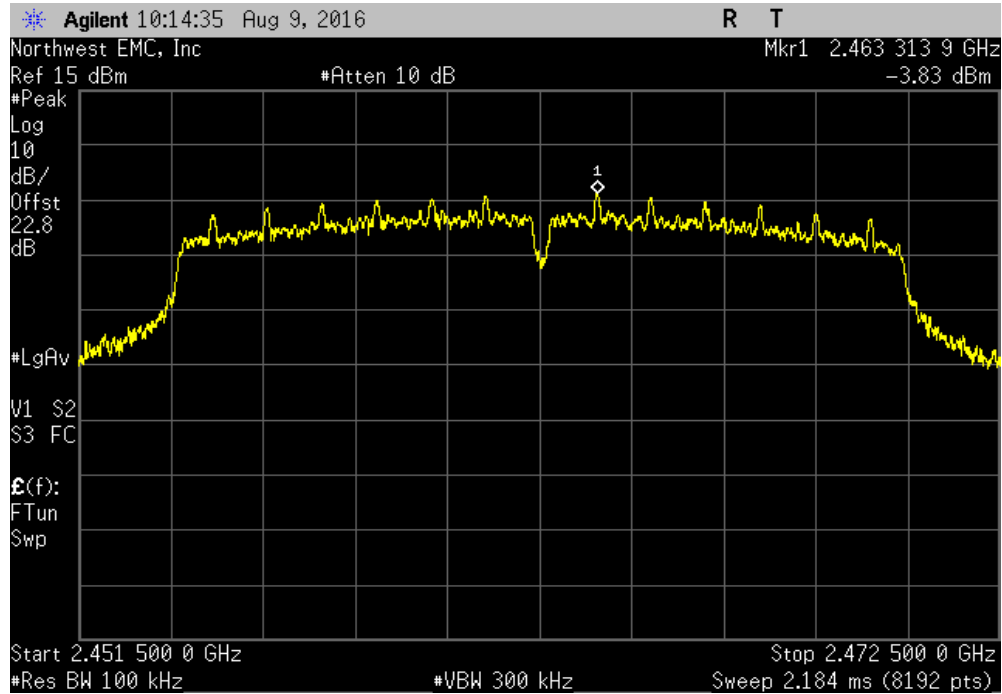


2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-52.26		-30	Pass	

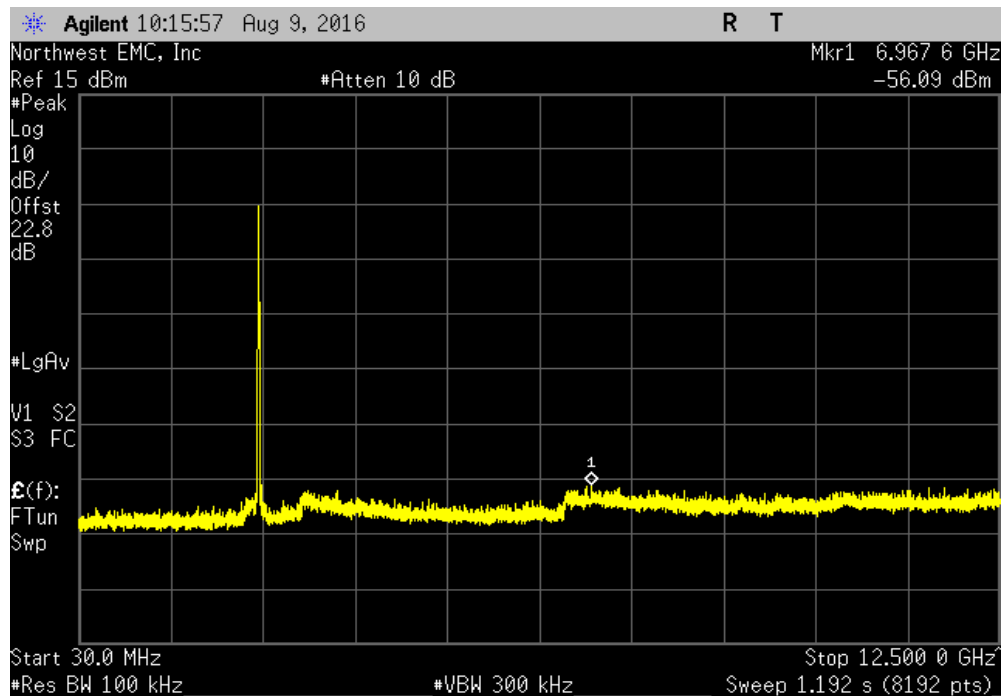


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-48.61	-30	Pass	

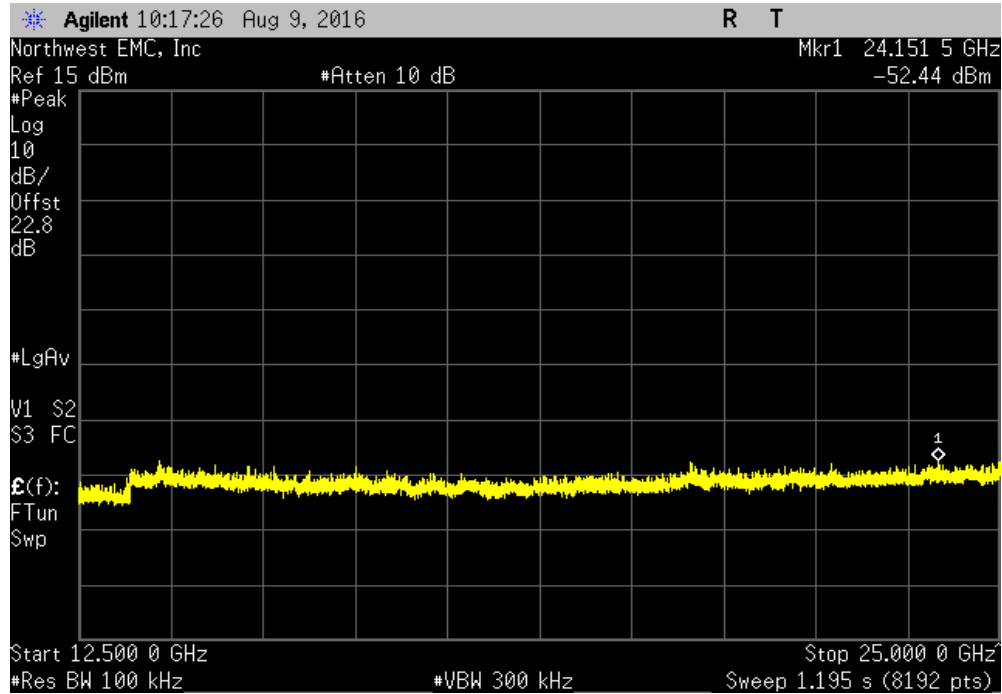


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

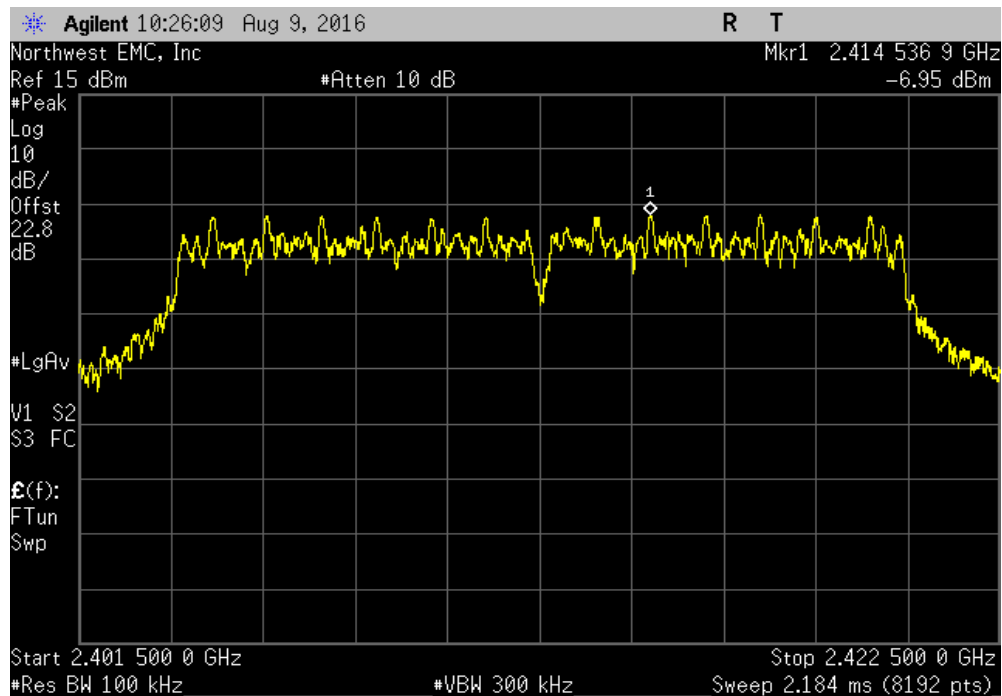


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-43.66	-30	Pass	

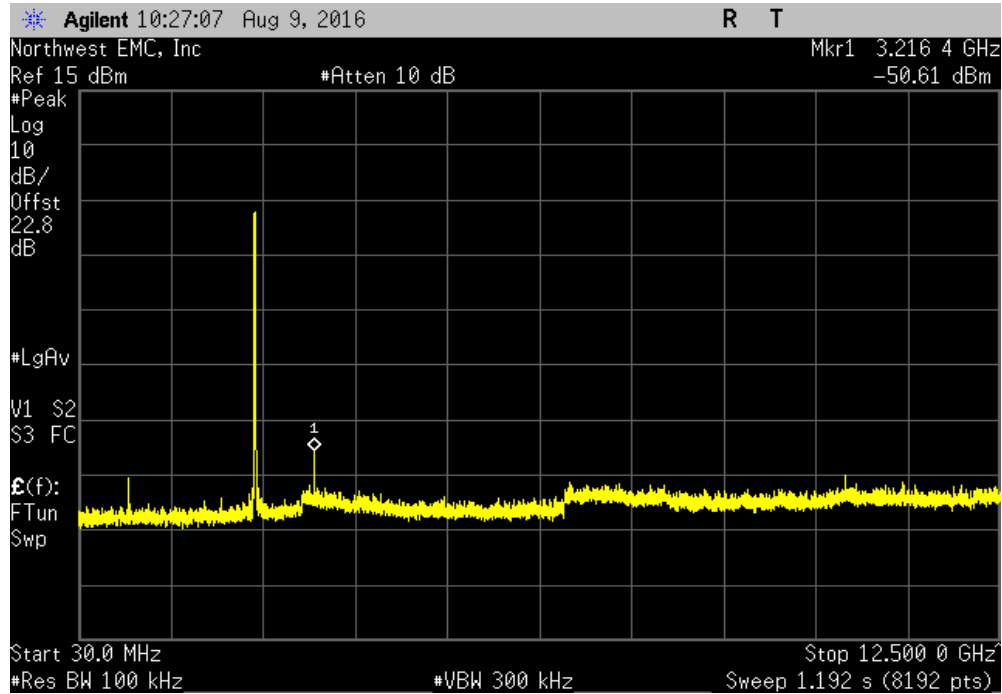


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-45.24	-30	Pass	

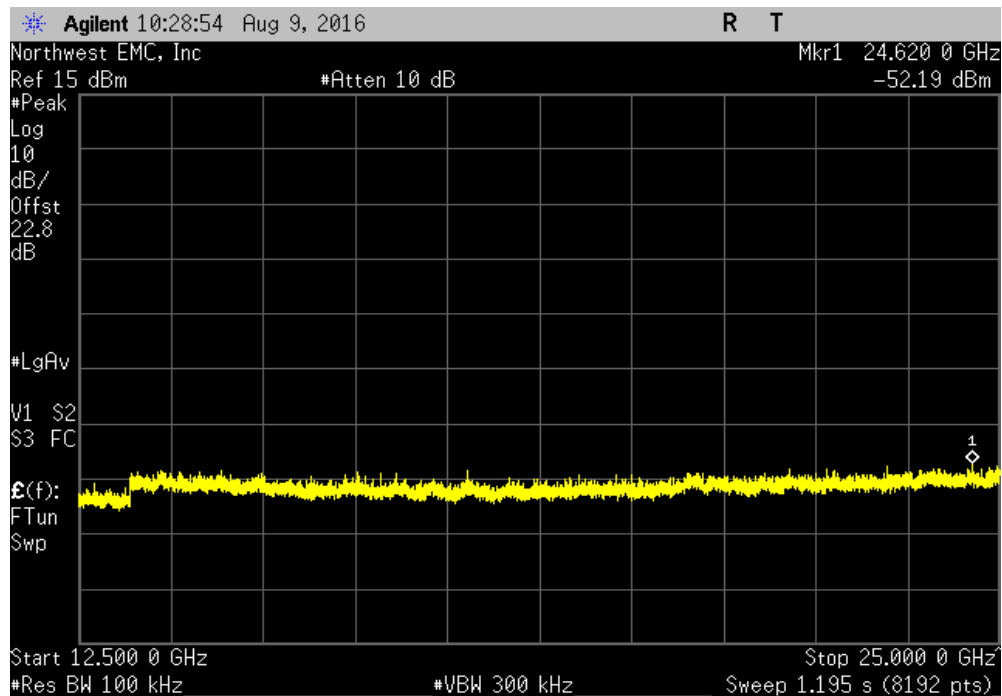


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

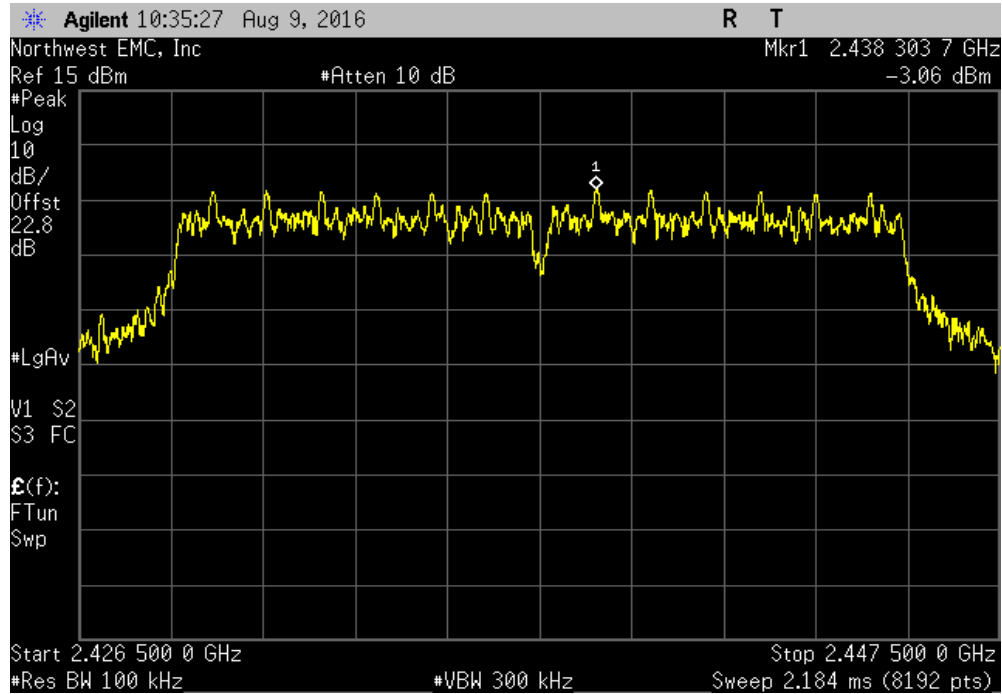


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-52.23		-30	Pass	

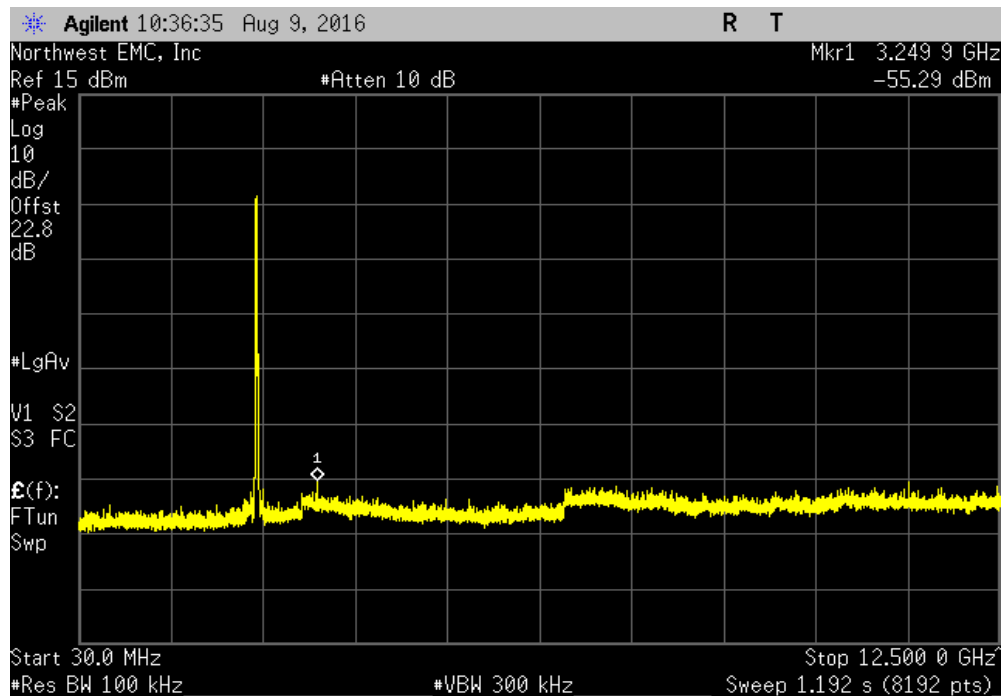


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-49.22	-30	Pass	

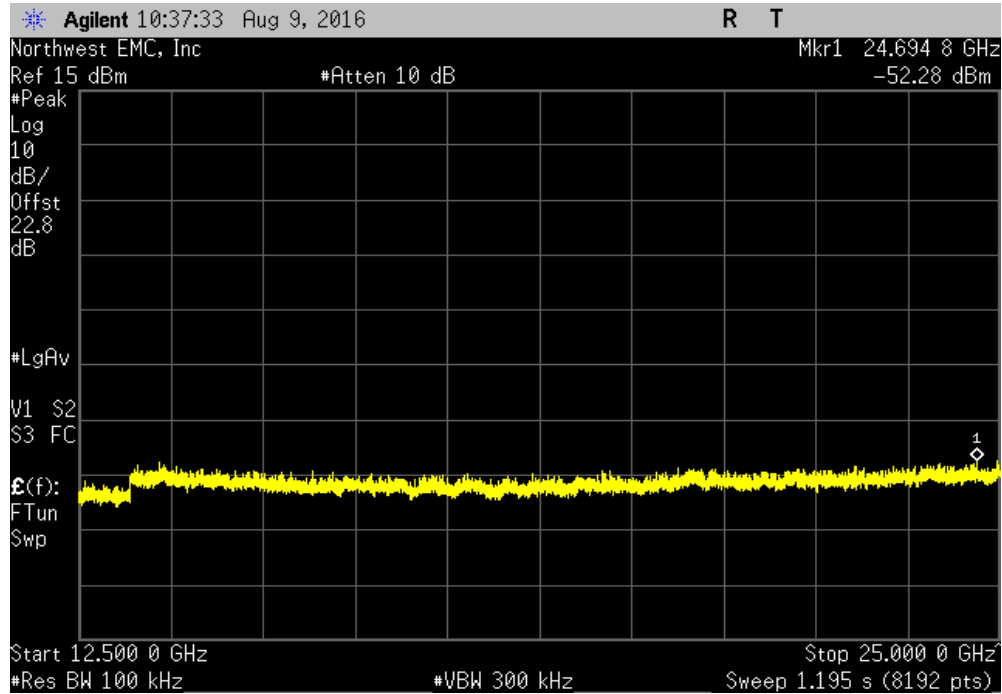


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

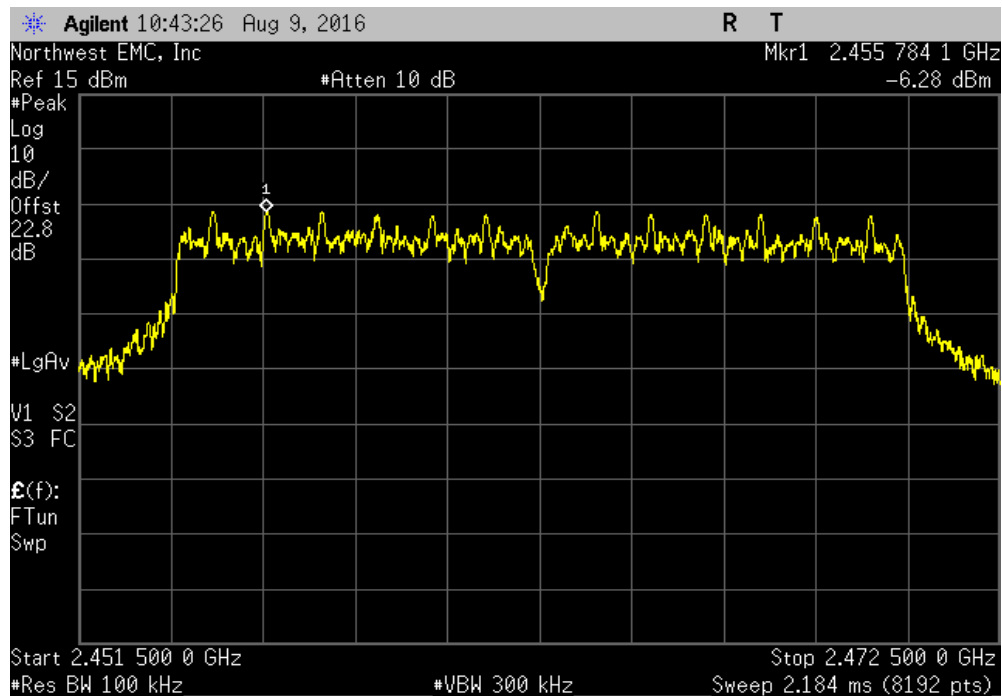


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-49.19	-30	Pass	

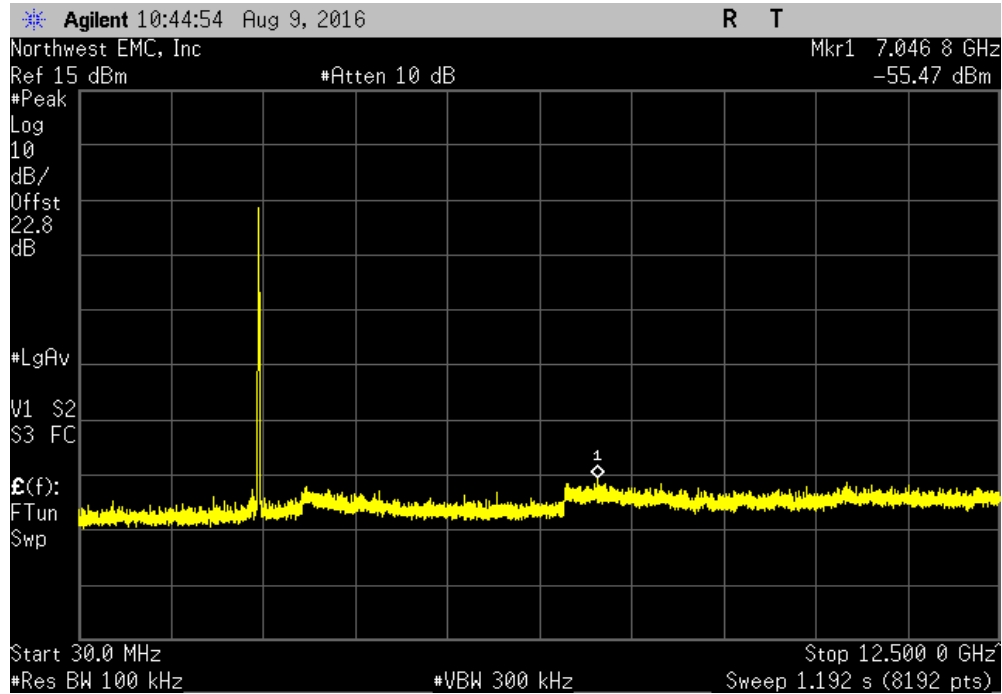


2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, High Channel 11, 2462 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-46.03	-30	Pass	

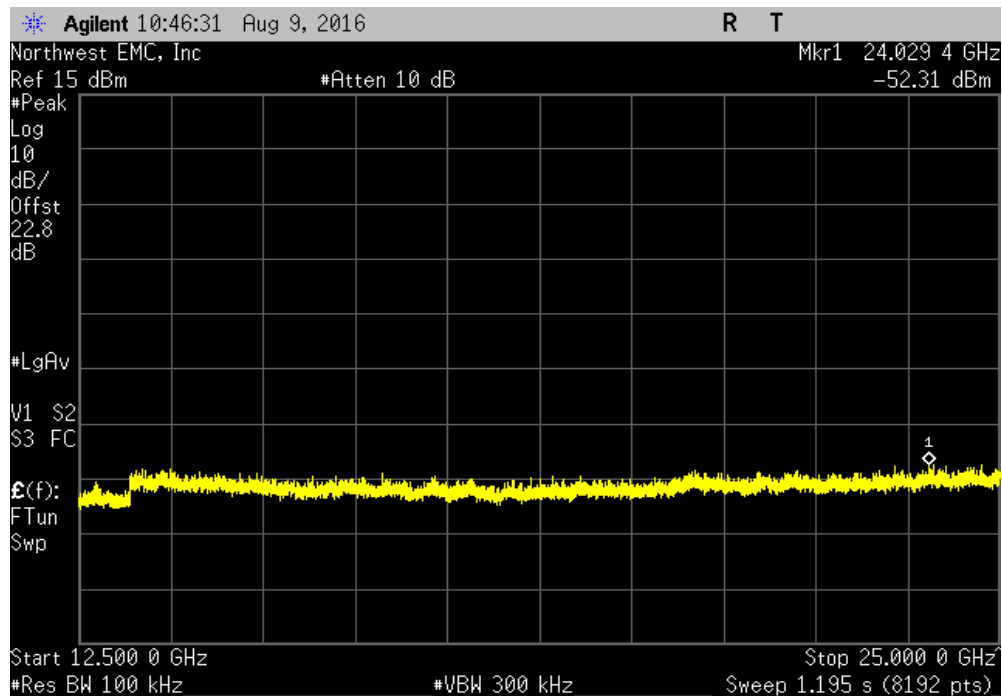


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

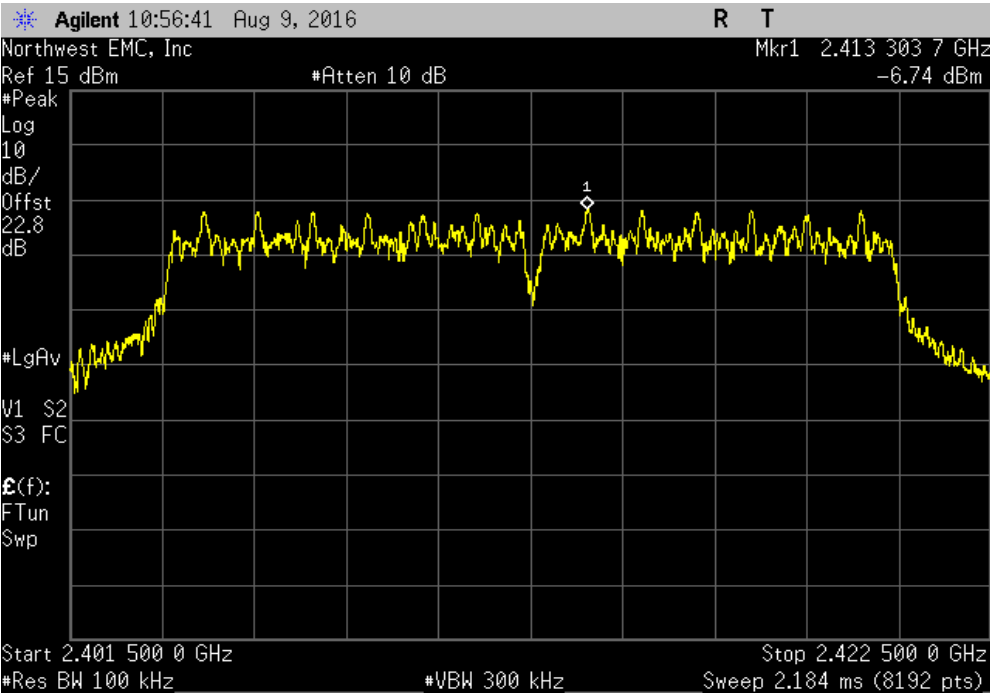


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-48.55		-30	Pass	

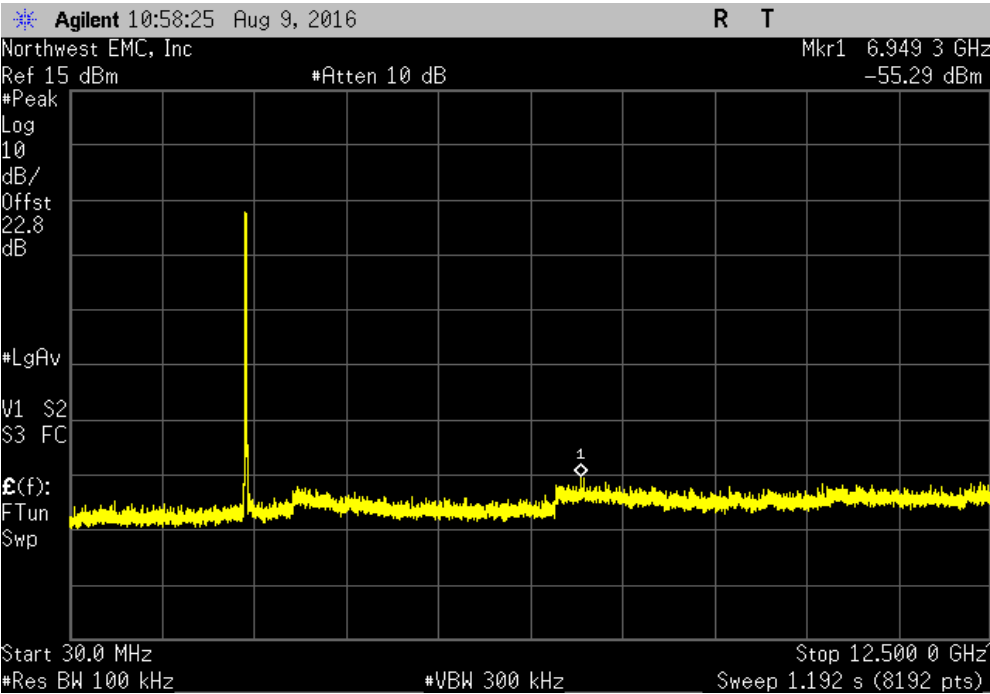


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Low Channel 1, 2412 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-45.47	-30	Pass	

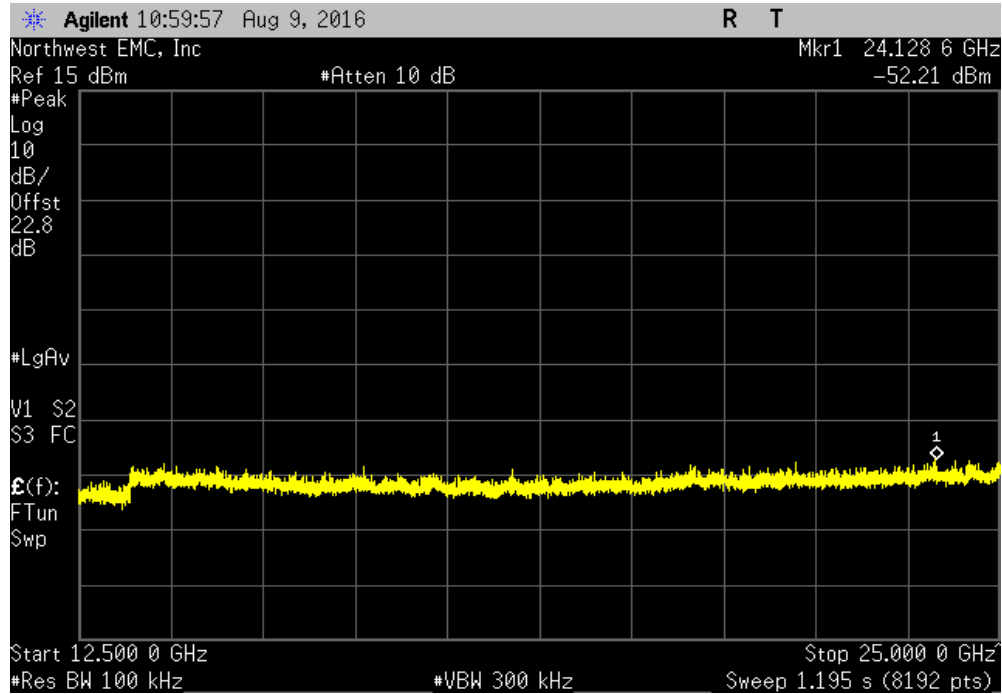


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

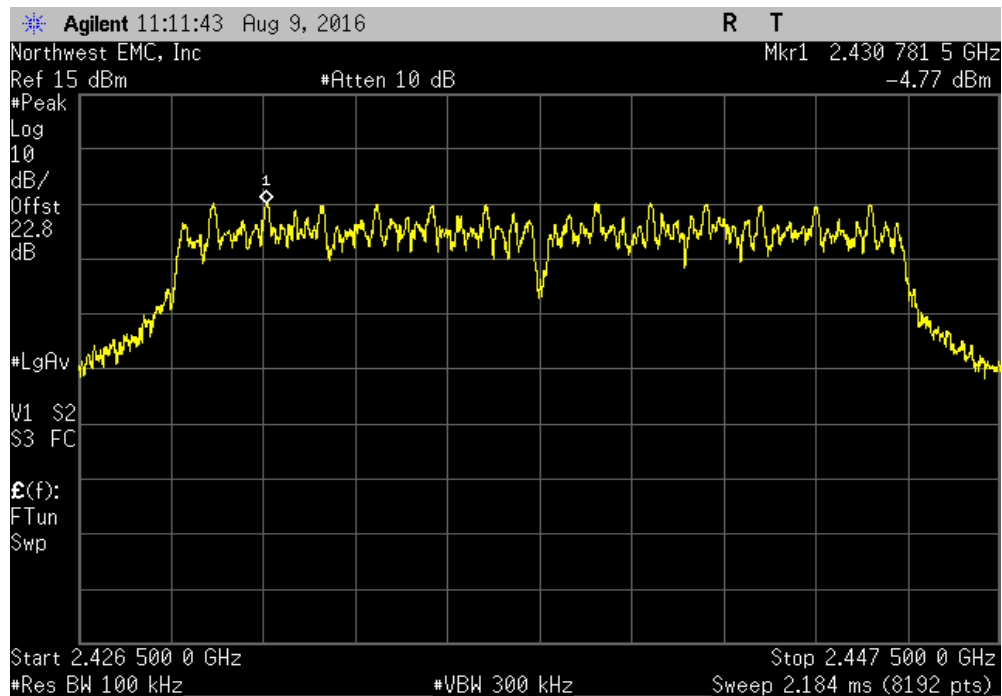


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-49.13	-30	Pass	

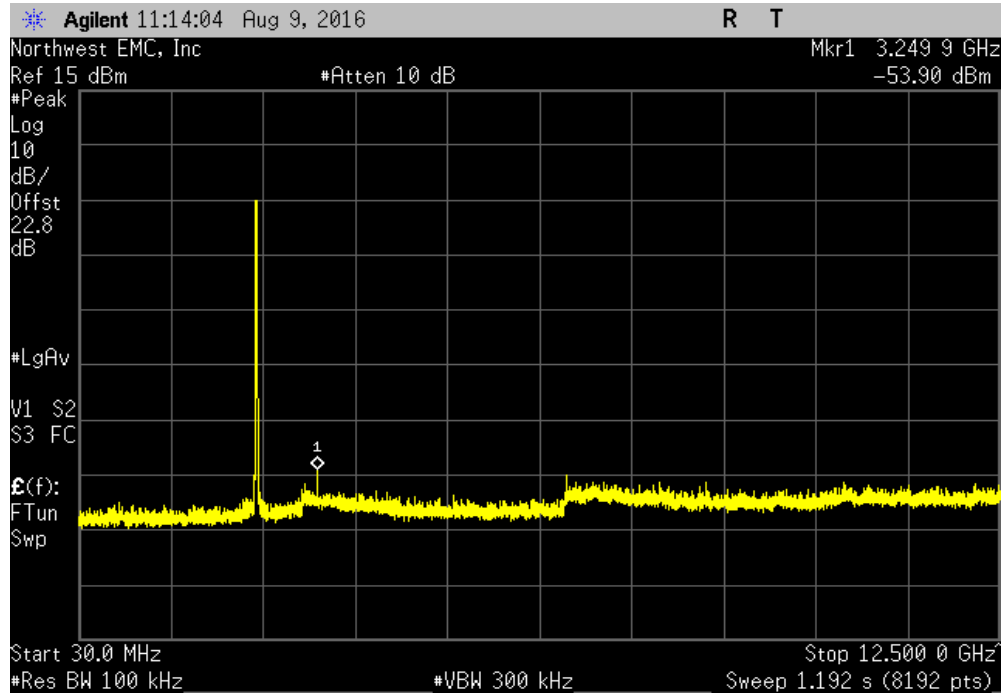


2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Mid Channel 6, 2437 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-46.59	-30	Pass	

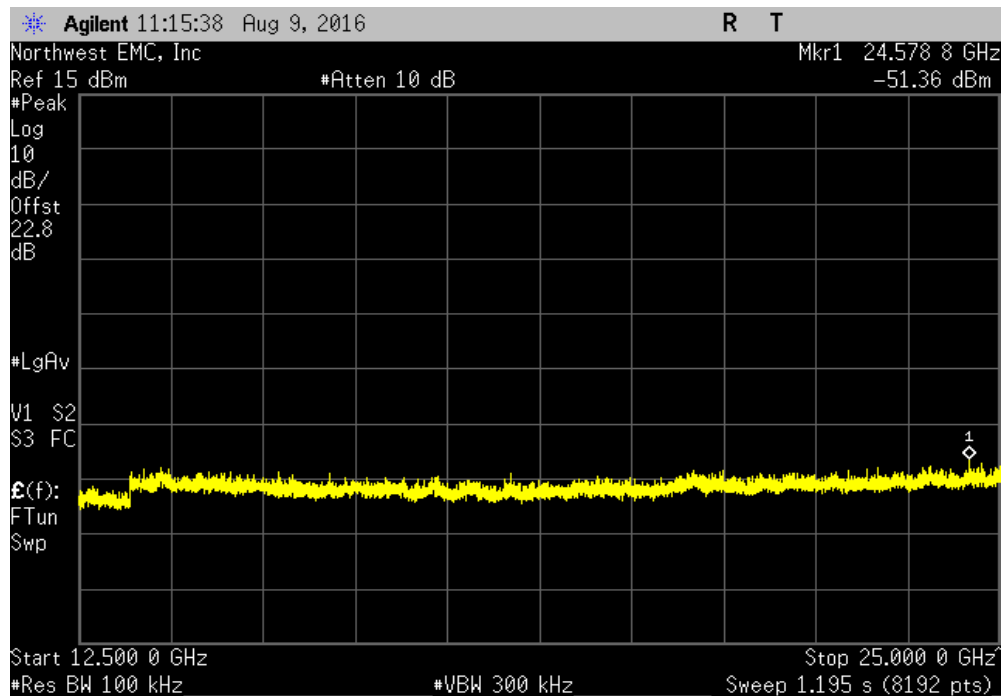


SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
Fundamental		N/A		N/A	N/A	

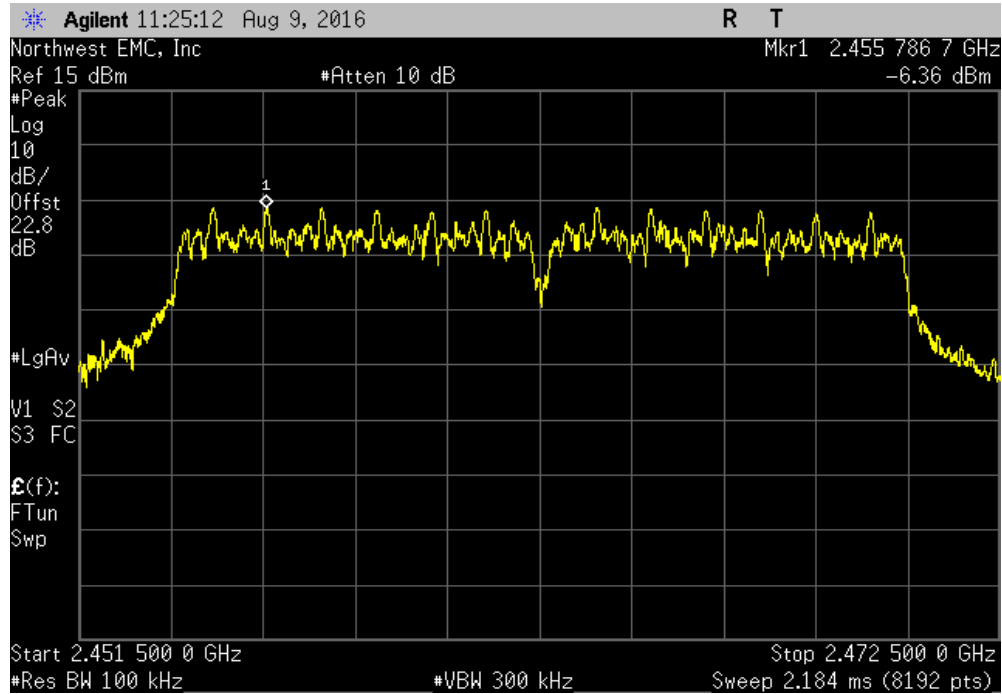

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz						
Frequency Range		Max Value (dBc)		Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-49.66		-30	Pass	

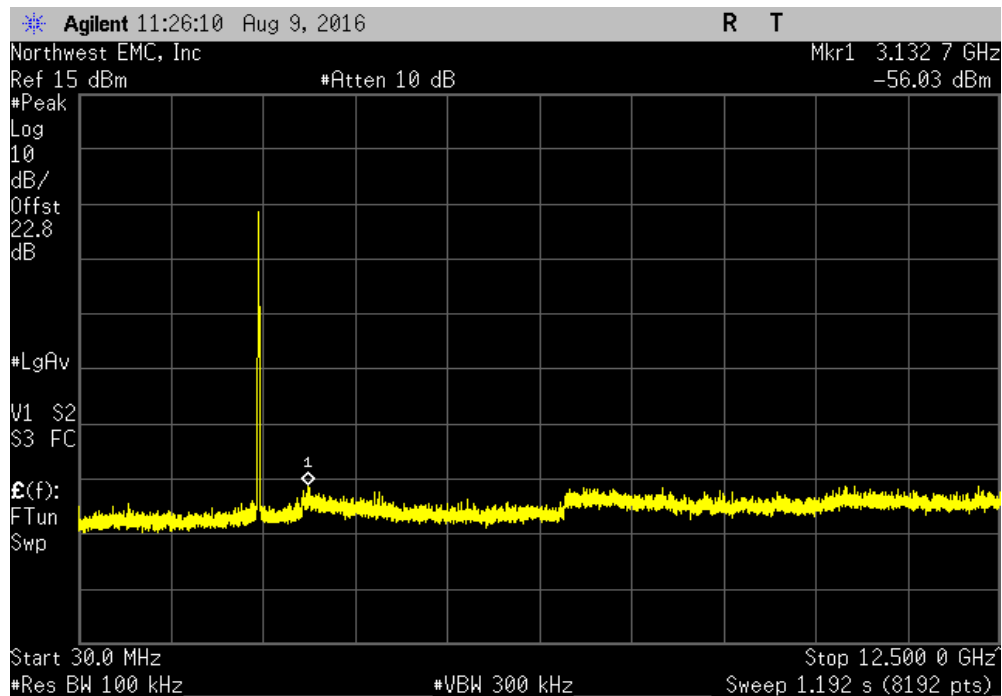

SPURIOUS CONDUCTED EMISSIONS

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, High Channel 11, 2462 MHz				
Frequency	Max Value	Limit	Result	
Range	(dBc)	≤ (dBc)		
12.5 GHz - 25 GHz	-46.45	-30	Pass	

