(802.11a 20M MODE CHAIN B)

LOW CH (802.11a 20M mode chain B)

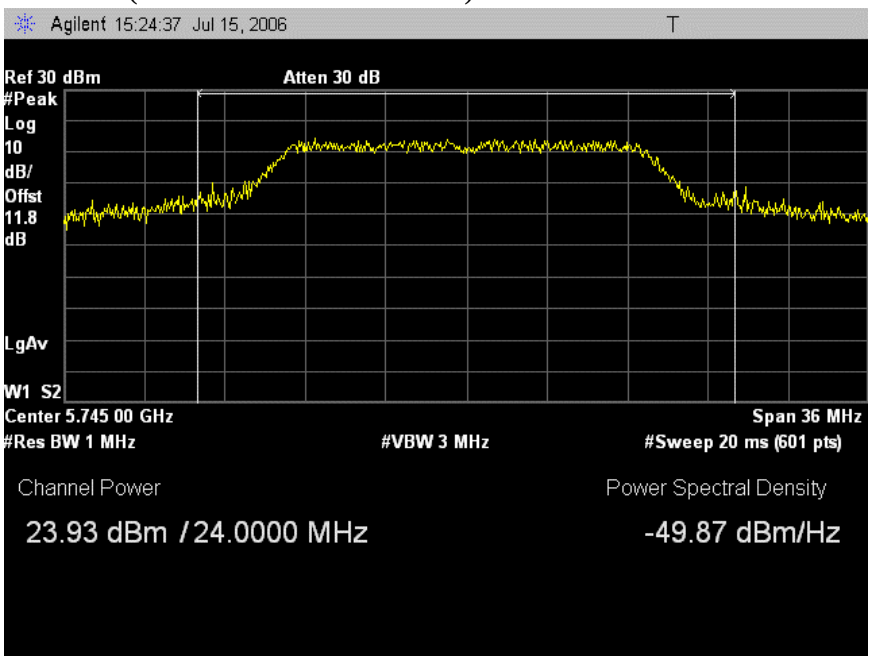

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11a 20M mode chain B)

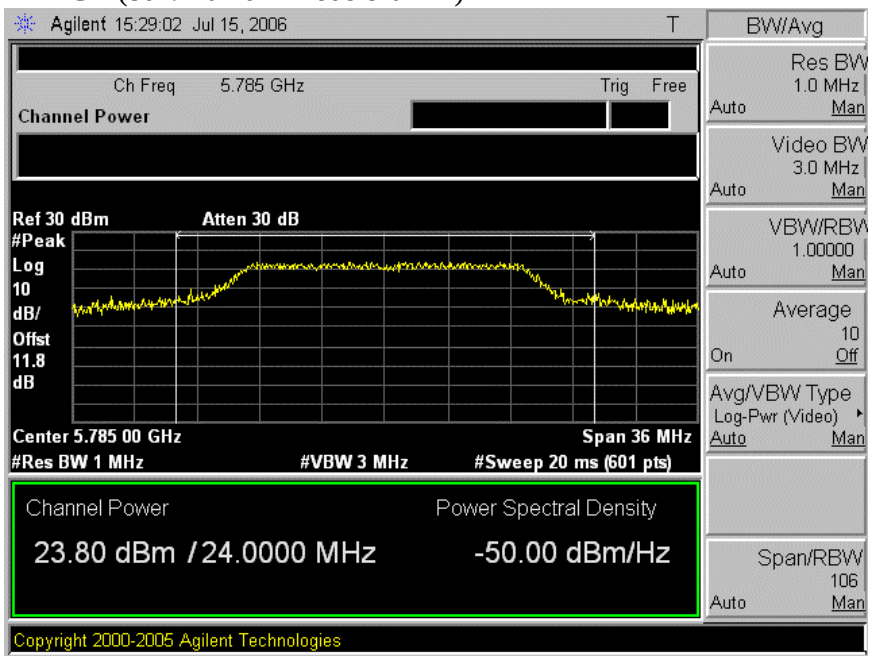

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 20M mode chain B)

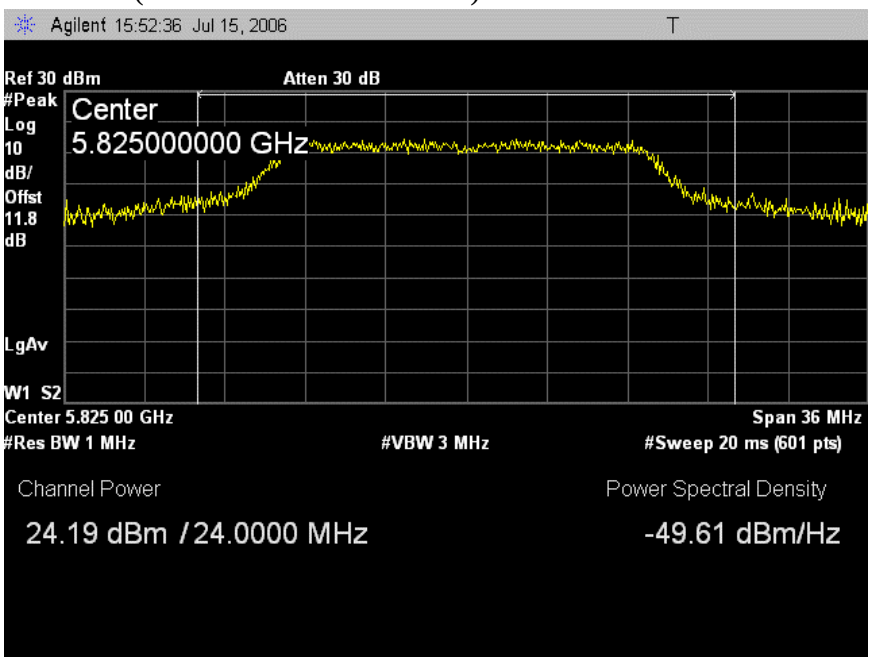

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 40M MODE CHAIN A)

LOW CH (802.11a mode 40M chain A)

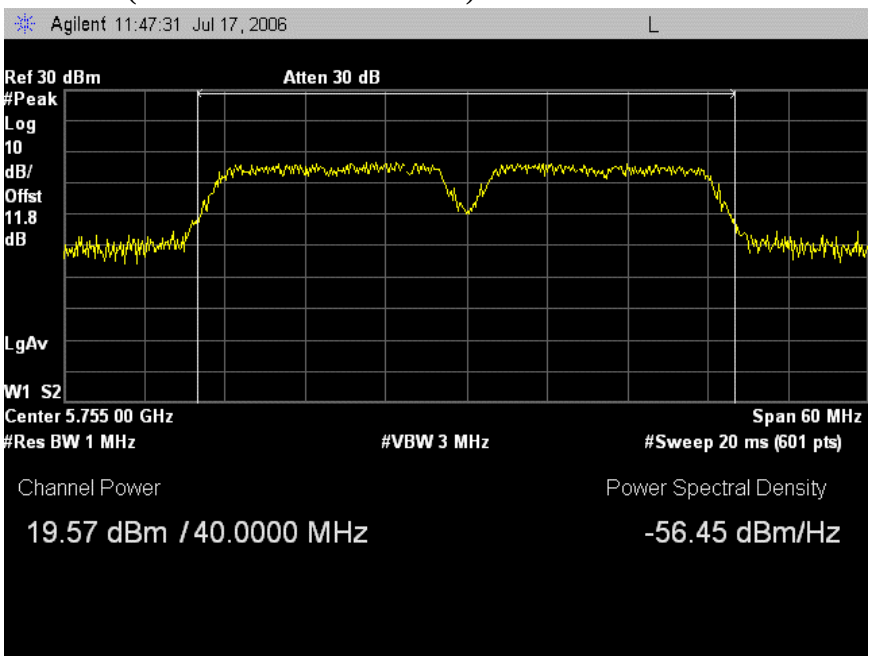

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 40M mode chain A)

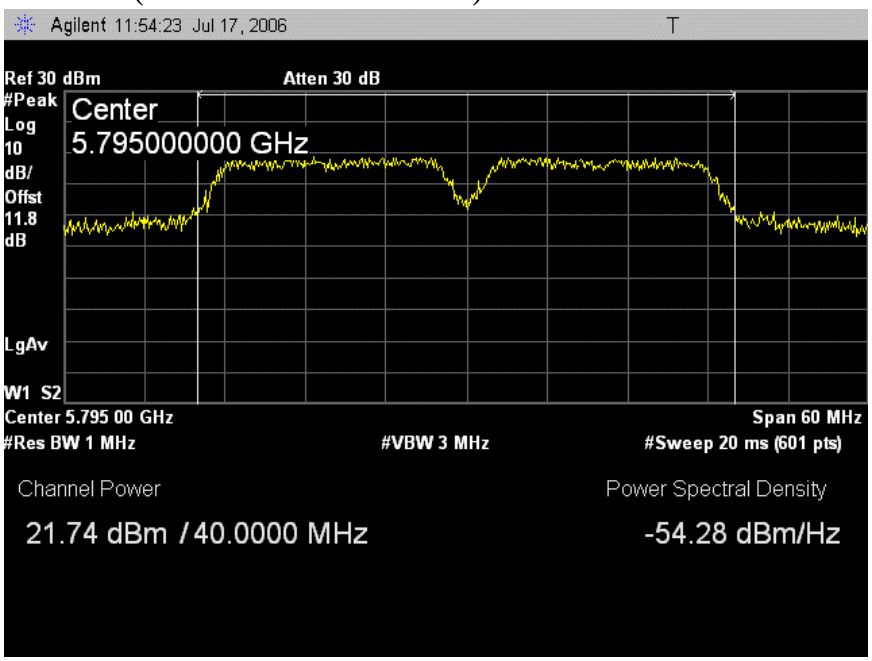

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 40M MODE CHAIN B)

LOW CH (802.11a 40M mode chain B)

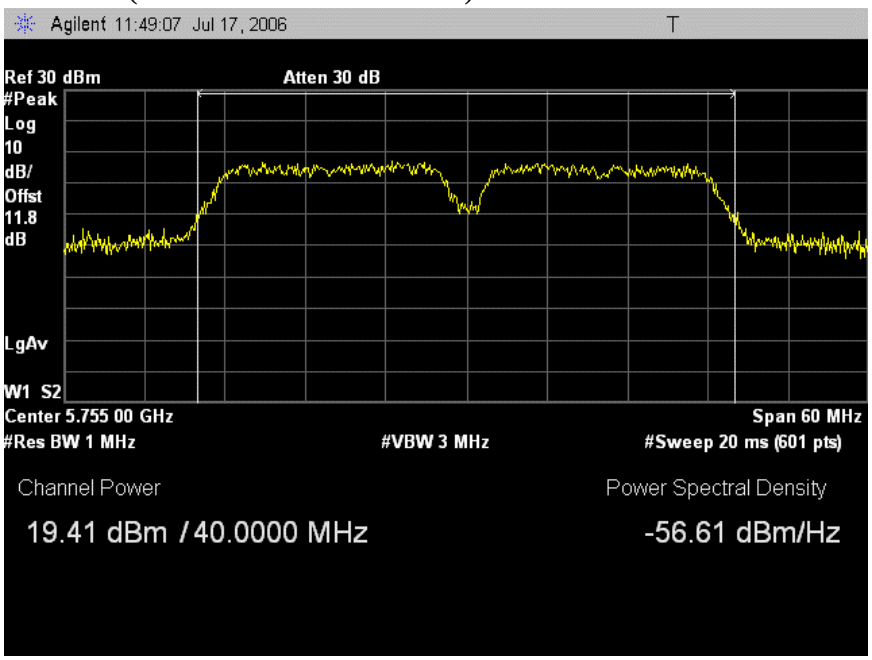

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 40M mode chain B)

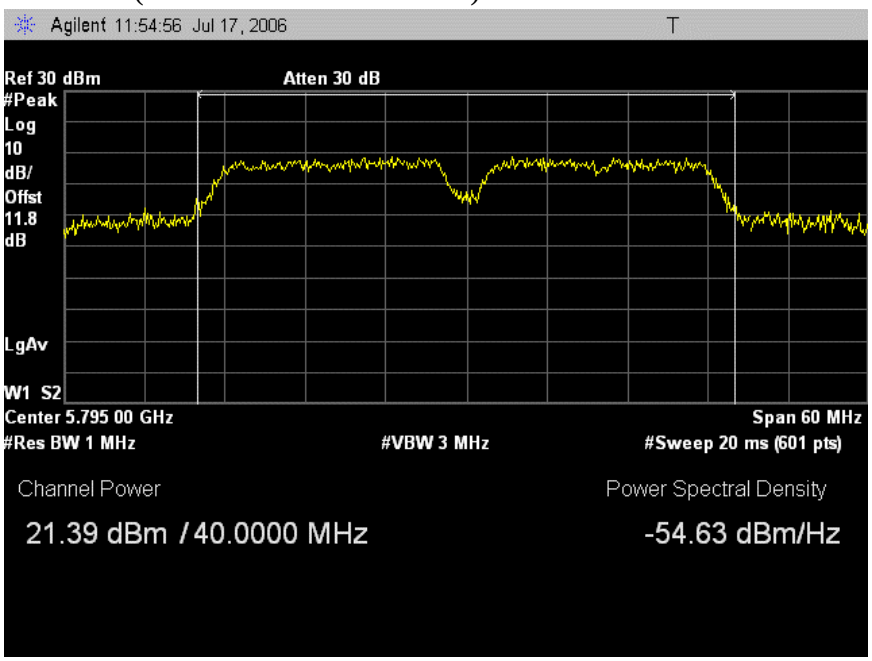

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11n HT20 MODE CHAIN A)

LOW CH (802.11n HT20 mode chain A)

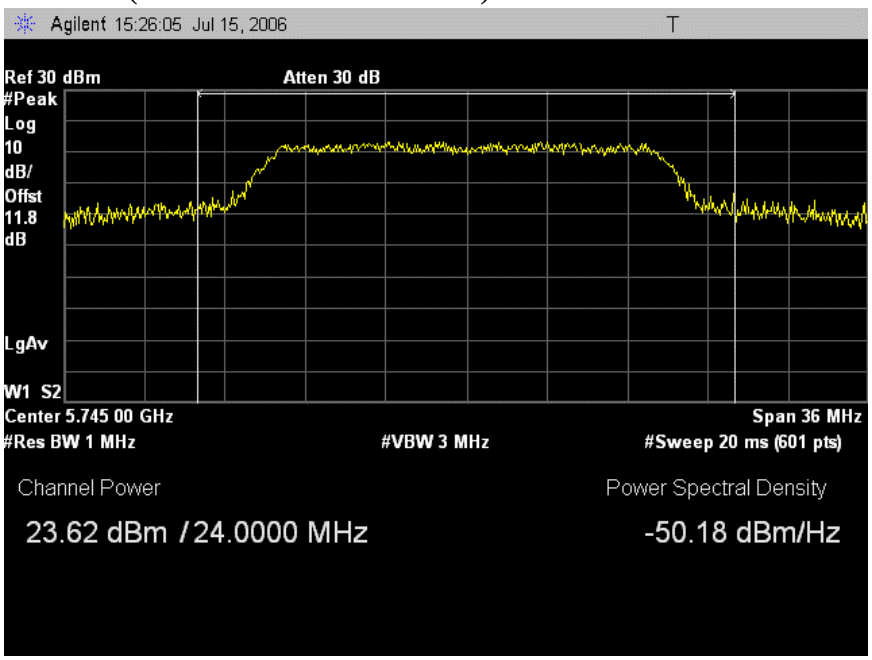

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11n HT20 mode chain A)

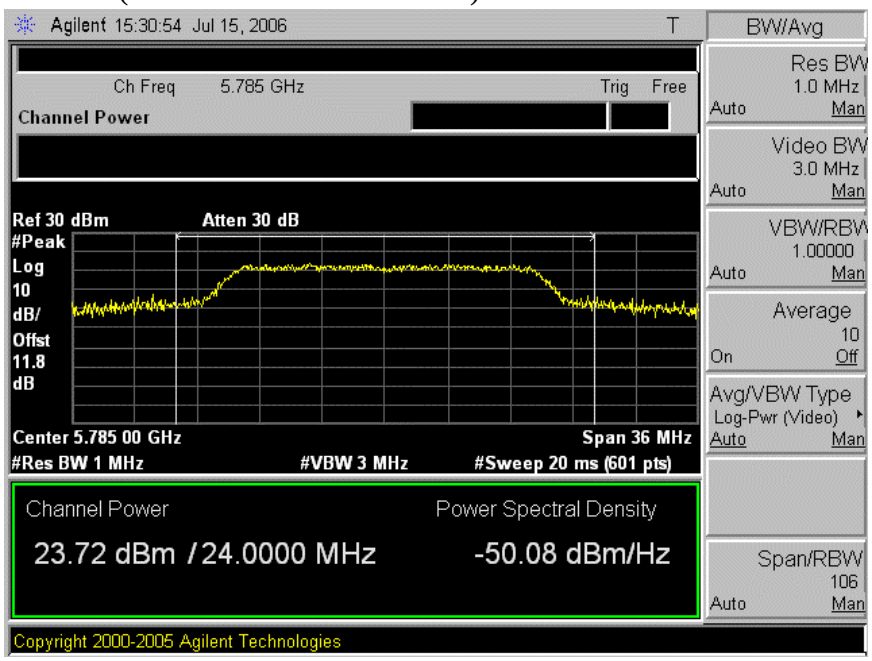

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT20 mode chain A)

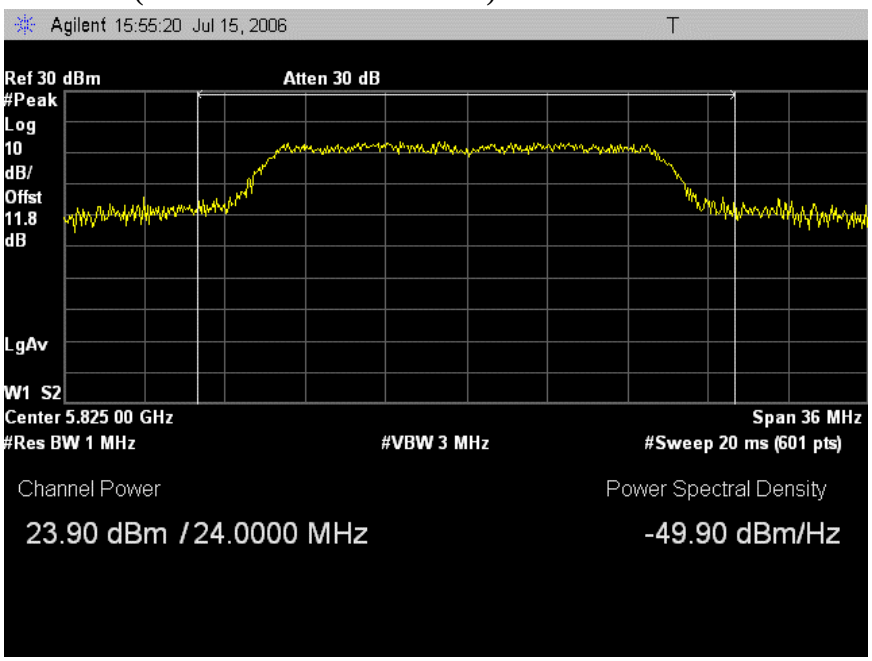

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT20 MODE CHAIN B)

LOW CH (802.11n HT20 mode chain B)

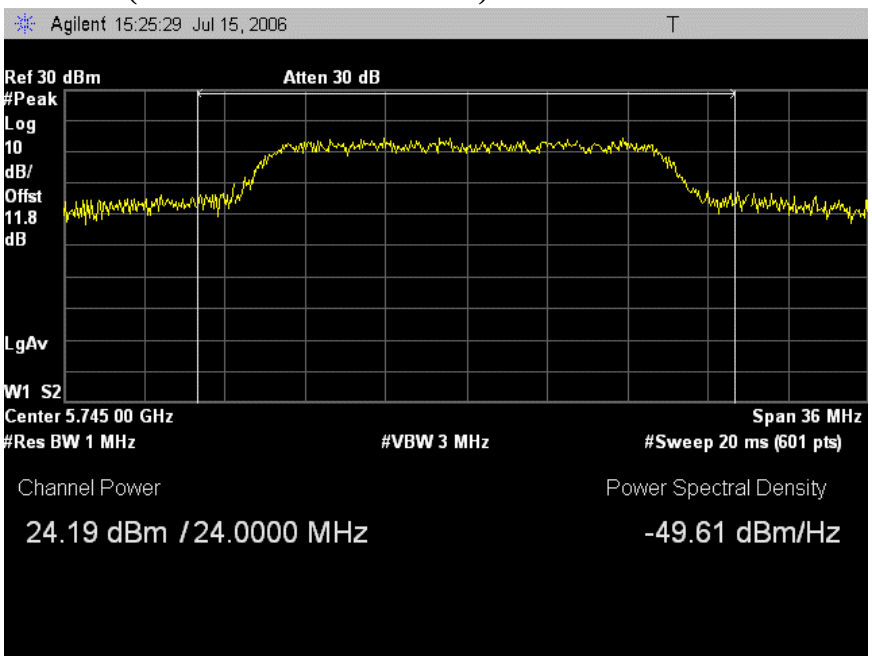

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11n HT20 mode chain B)

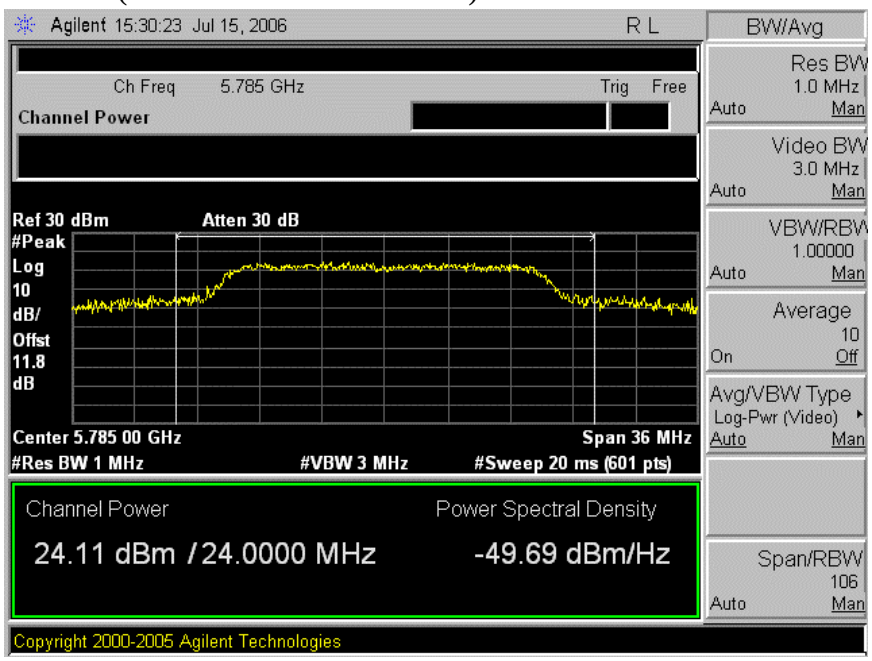

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT20 mode chain B)

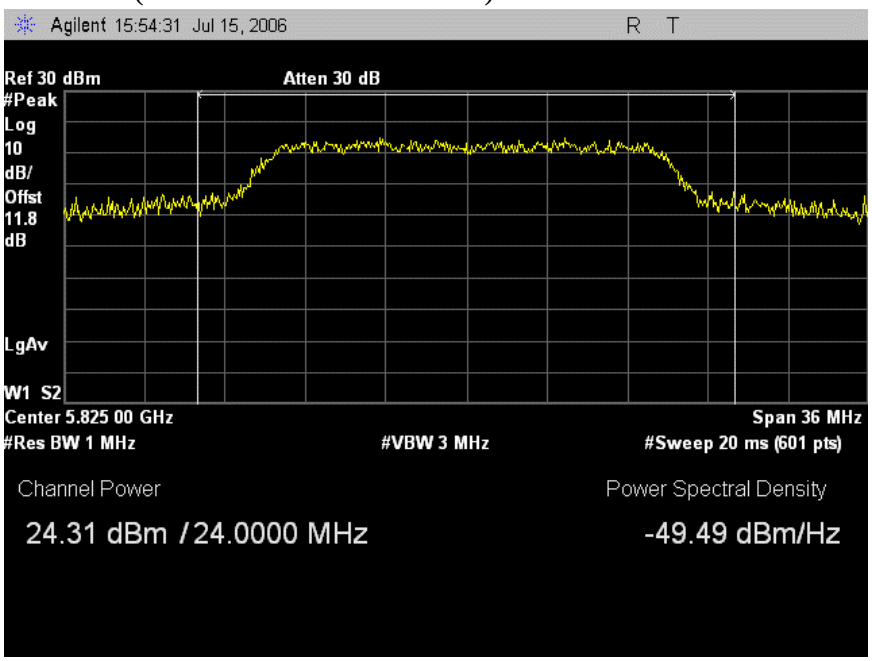

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT40 MODE CHAIN A)

LOW CH (802.11n HT40 mode chain A)

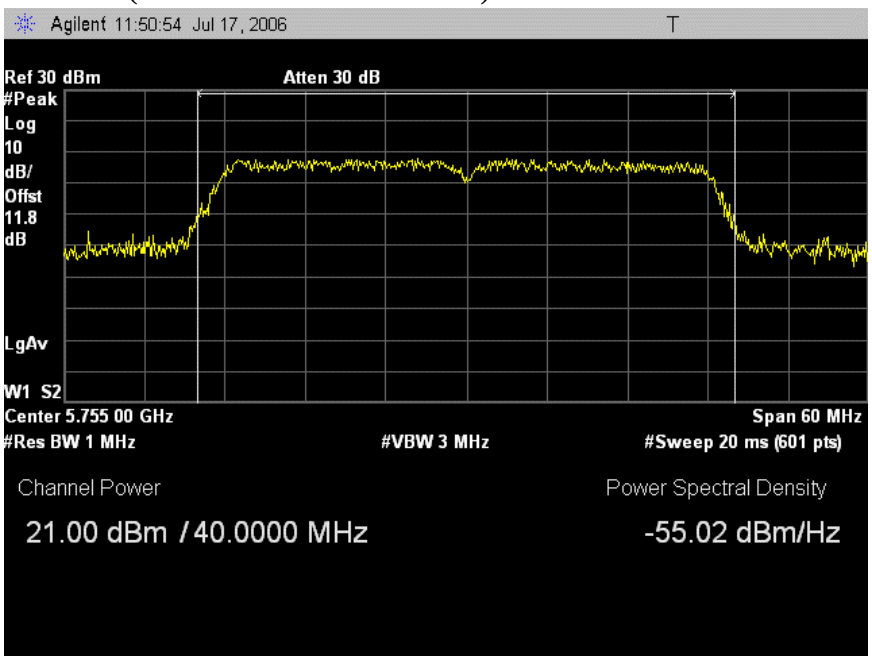

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT40 mode chain A)

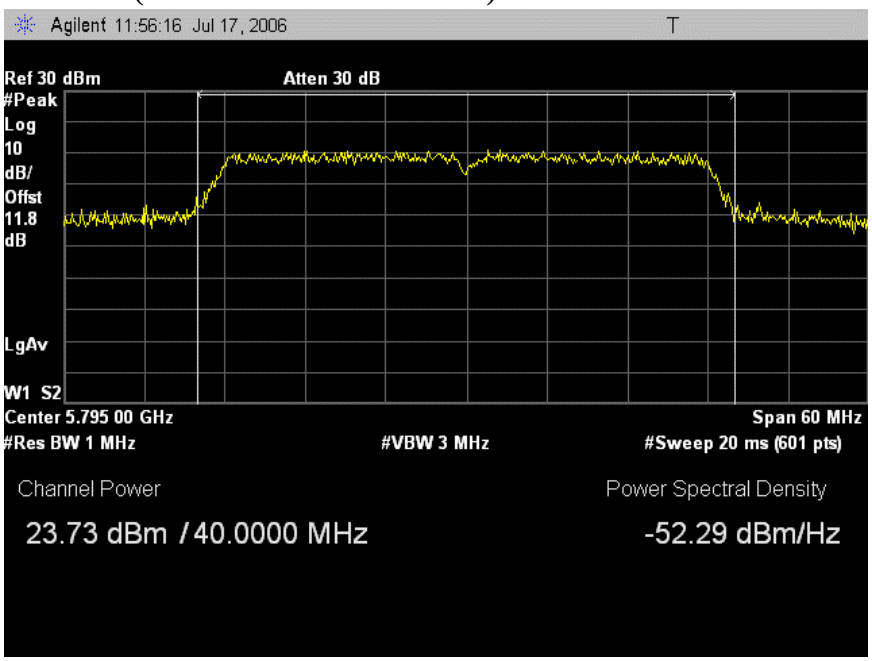

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT40 MODE CHAIN B)

LOW CH (802.11n HT40 mode chain B)

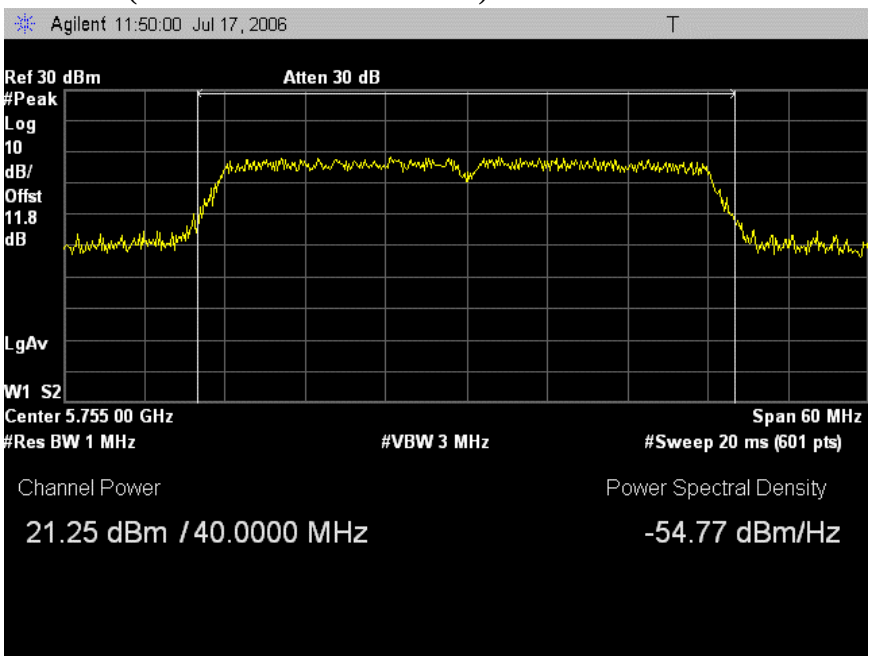

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT40 mode chain B)

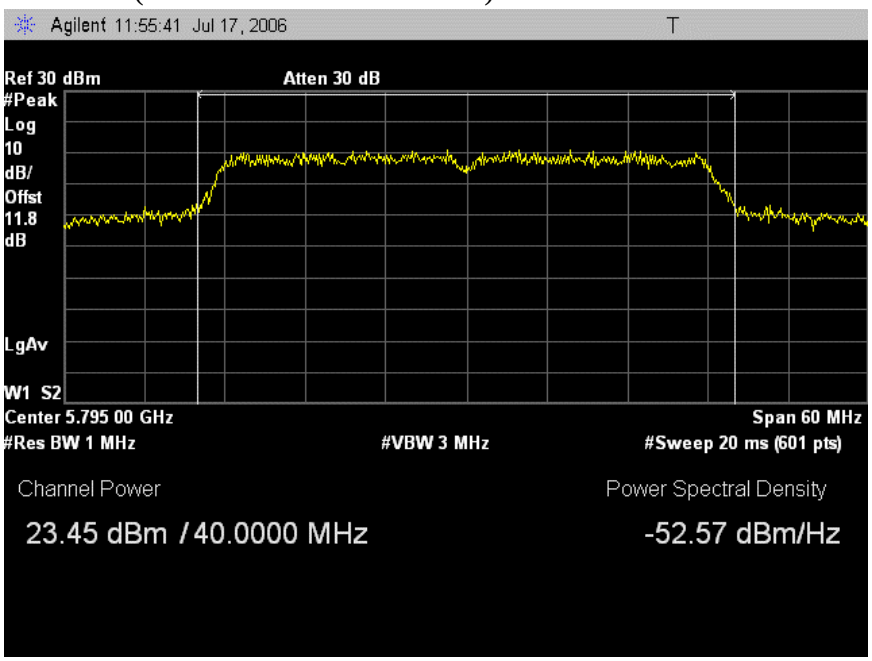

This report shall not be reproduced except in full, without the written approval of CCS.

7.2.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power = 10 log (10^ (Chain 0 Power / 10) + 10^ (Chain 2 Power / 10))

This report shall not be reproduced except in full, without the written approval of CCS.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.8 dB (including 10 dB pad and 1.8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain A (dBm)	Average Power Chain B (dBm)	Average Power Total (dBm)
802.11a 20M Mode				
Low	5745	16.9	17.1	20.0
Middle	5785	16.8	17.0	19.9
High	5825	16.9	17.0	20.0
802.11a 40M Mode				
Low	5755	12.5	12.6	15.6
High	5795	15.0	15.0	18.0
802.11n HT20 Mode				
Low	5745	16.9	17.0	20.0
Middle	5785	16.9	16.9	19.9
High	5825	16.8	16.9	19.8
802.11n HT40 Mode				
Low	5755	14.3	14.4	17.4
High	5795	17.0	16.9	19.9

This report shall not be reproduced except in full, without the written approval of CCS.

7.2.5. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

Each chain is measured separately and the total PPSD is calculated using:

Total PPSD = 10 log (10^ (Chain 0 PPSD / 10) + 10^ (Chain 2 PPSD / 10))

This report shall not be reproduced except in full, without the written approval of CCS.

RESULTS

No non-compliance noted:

Mode Channel	Frequency (MHz)	PPSD Chain A (dBm)	PPSD Chain B (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
802.11a 20M Mode						
Low	5745	-11.20	-12.28	-8.70	8	-16.70
Middle	5785	-10.84	-12.80	-8.70	8	-16.70
High	5825	-11.36	-12.63	-8.94	8	-16.94
802.11a 40M Mode						
Low	5755	-13.85	-15.16	-11.45	8	-19.45
High	5795	-14.42	-15.46	-11.90	8	-19.90
802.11n HT20 Mode						
Low	5745	-11.42	-12.46	-8.90	8	-16.90
Middle	5785	-13.18	-12.46	-9.79	8	-17.79
High	5825	-12.12	-12.98	-9.52	8	-17.52
802.11n HT40 Mode						
Low	5755	-14.49	-14.70	-11.58	8	-19.58
High	5795	-14.16	-14.74	-11.43	8	-19.43

This report shall not be reproduced except in full, without the written approval of CCS.

RESULTS WITH COMBINER

No non-compliance noted:

Mode Channel	Frequency (MHz)	PPSD Using Combiner (dBm)	Limit (dBm)	Margin (dB)
802.11a Mode				
Low	5745	-6.73	8	-14.73
Middle	5785	-7.02	8	-15.02
High	5825	-5.73	8	-13.73
802.11a Mode				
Low	5755	-12.50	8	-20.50
High	5795	-9.40	8	-17.40
802.11n HT20 Mode				
Low	5745	-6.33	8	-14.33
Middle	5785	-7.65	8	-15.65
High	5825	-7.53	8	-15.53
802.11n HT40 Mode				
Low	5755	-10.06	8	-18.06
High	5795	-9.84	8	-17.84

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 20M MODE CHAIN A)

LOW CH (802.11a mode 20M chain A)

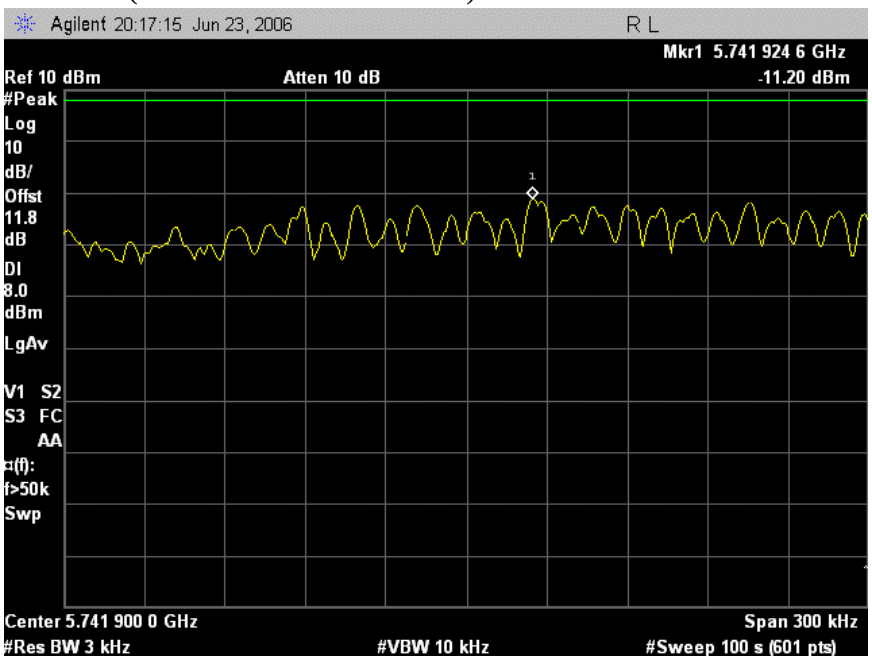

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11a 20M mode chain A)

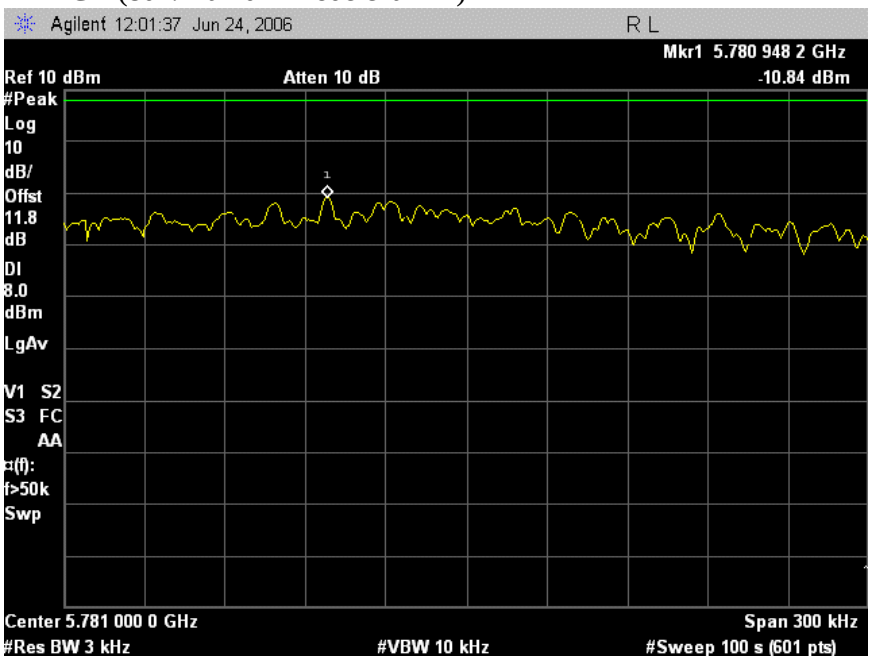

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 20M mode chain A)

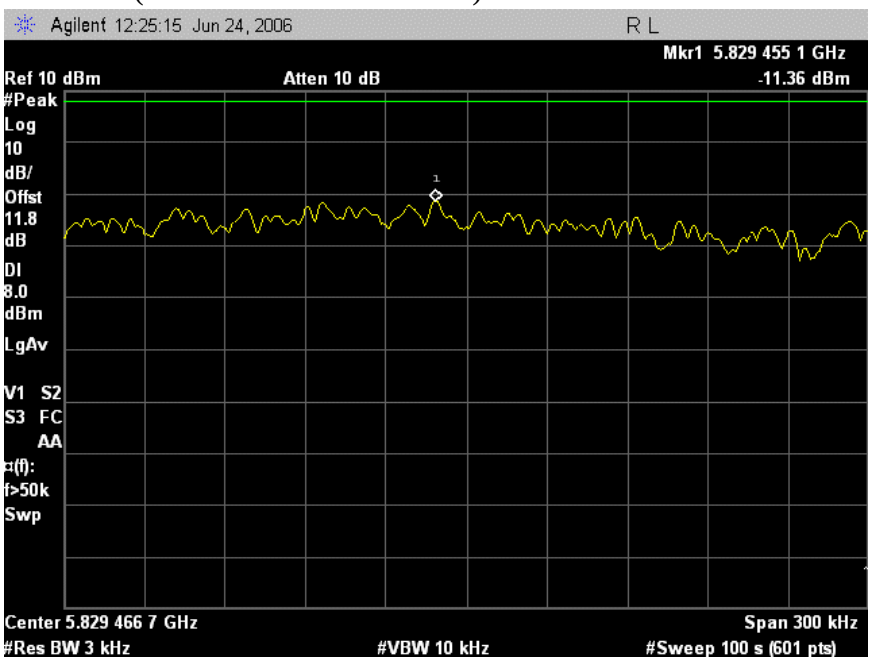

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 20M MODE CHAIN B)

LOW CH (802.11a 20M mode chain B)

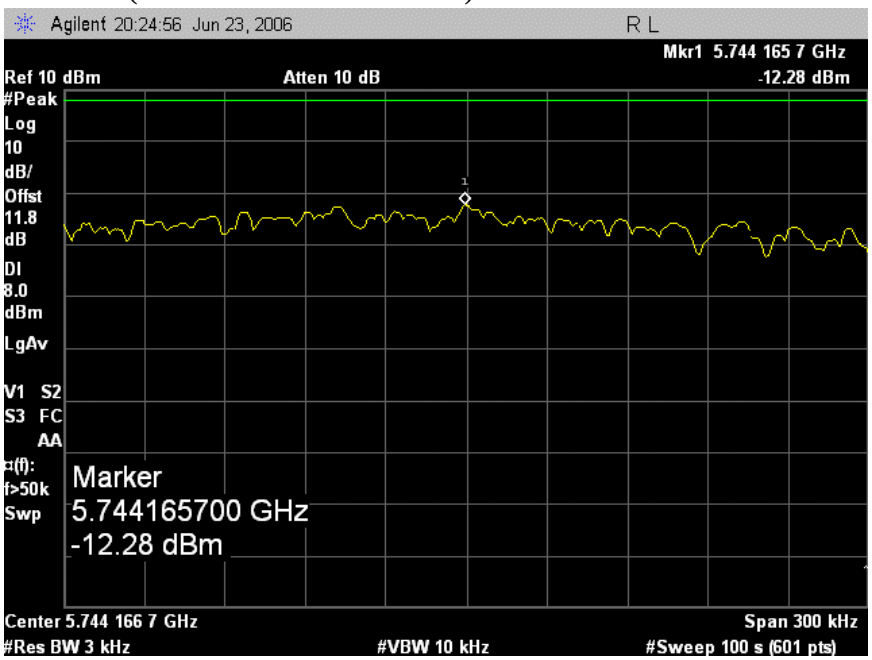

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11a 20M mode chain B)

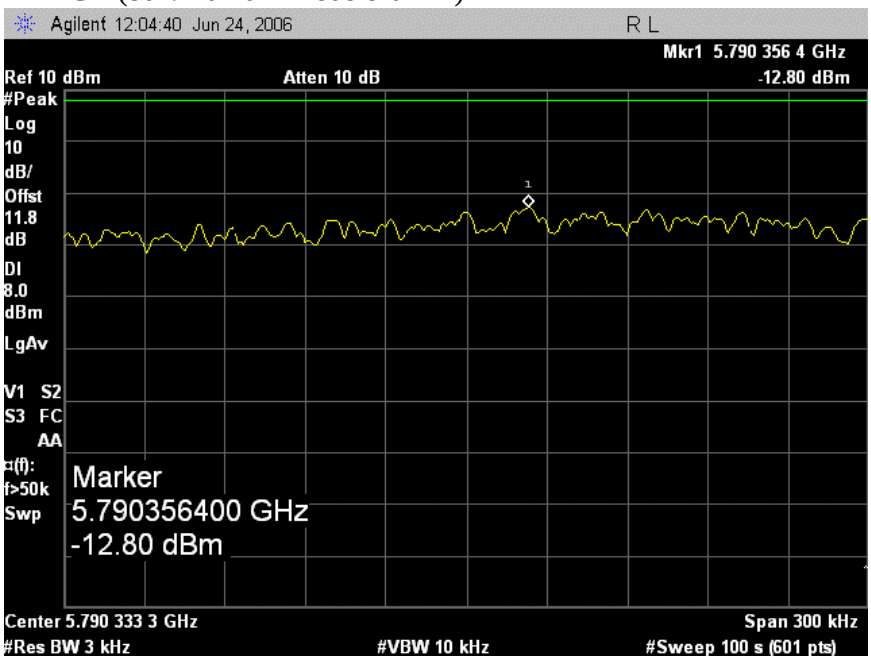

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 20M mode chain B)

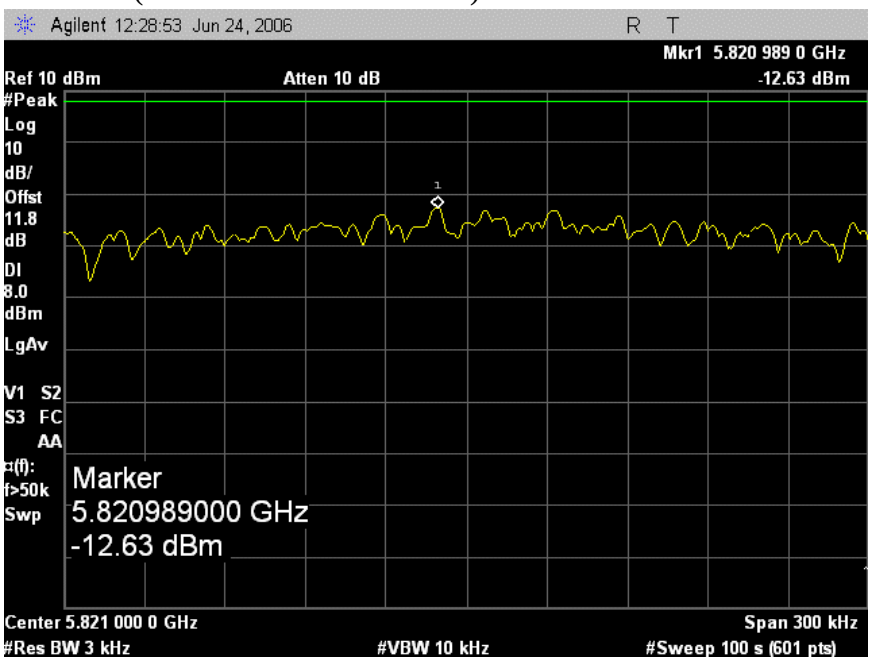

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 40M MODE CHAIN A)

LOW CH (802.11a mode 40M chain A)

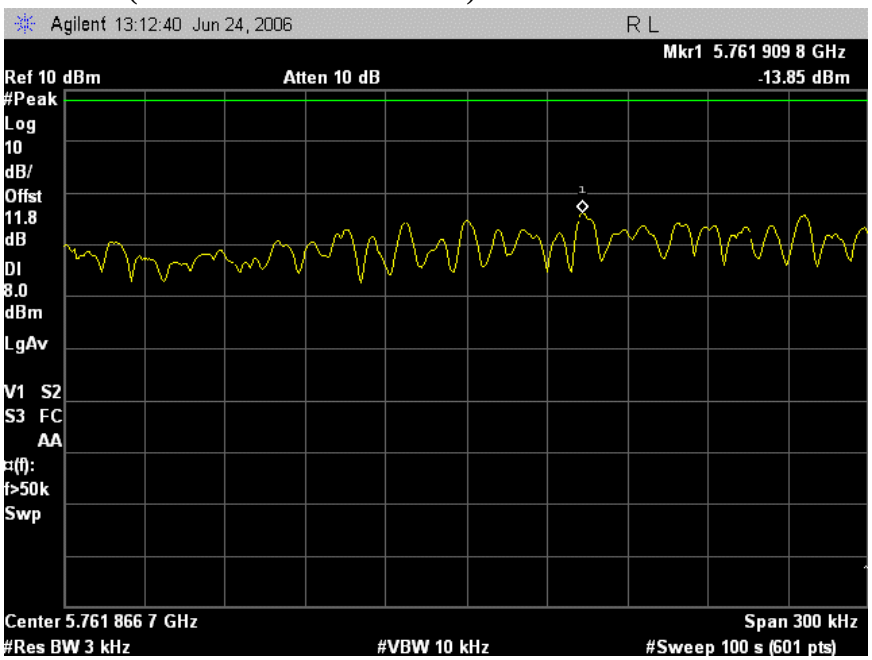

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 40M mode chain A)

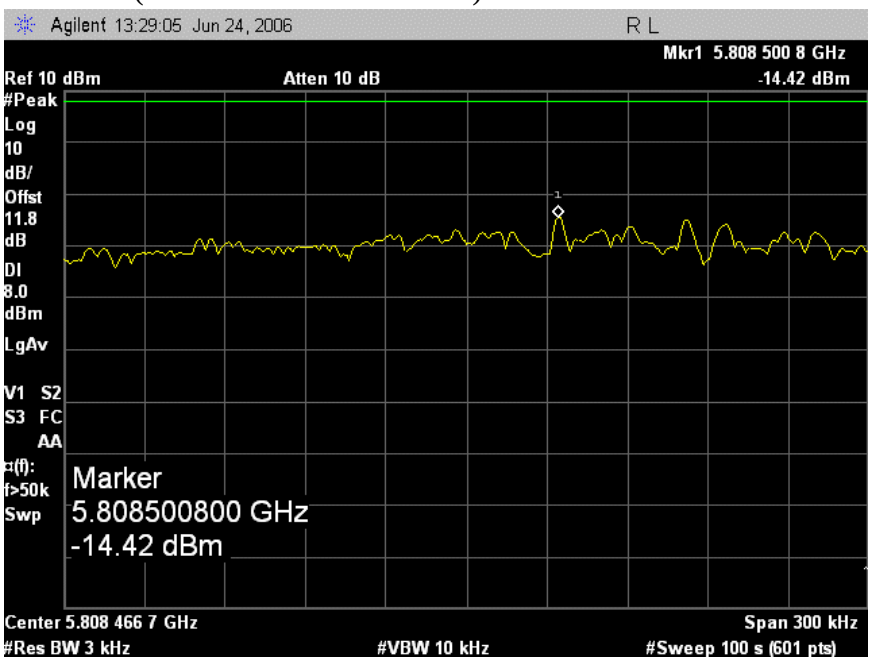

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 40M MODE CHAIN B)

LOW CH (802.11a 40M mode chain B)

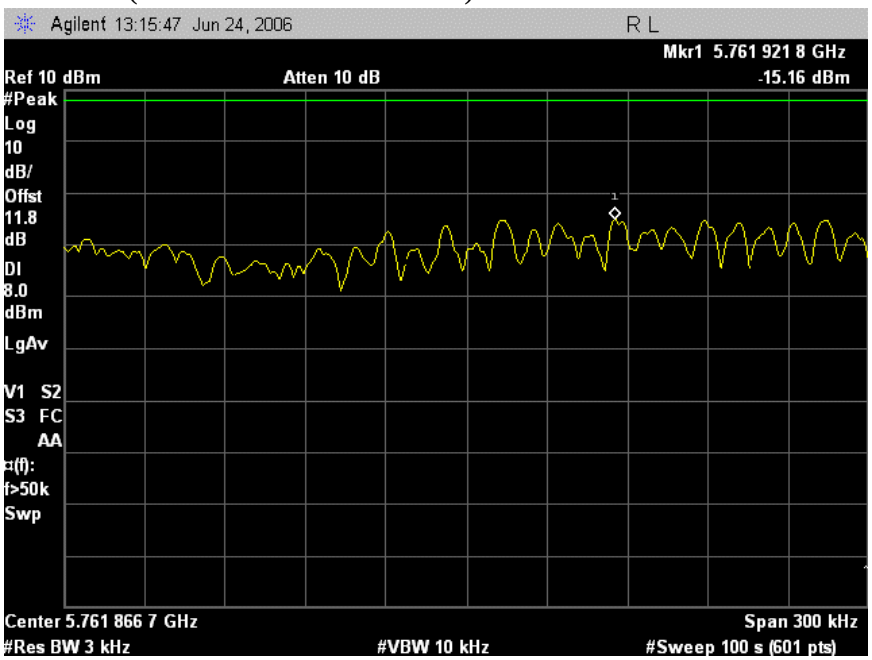

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 40M mode chain B)

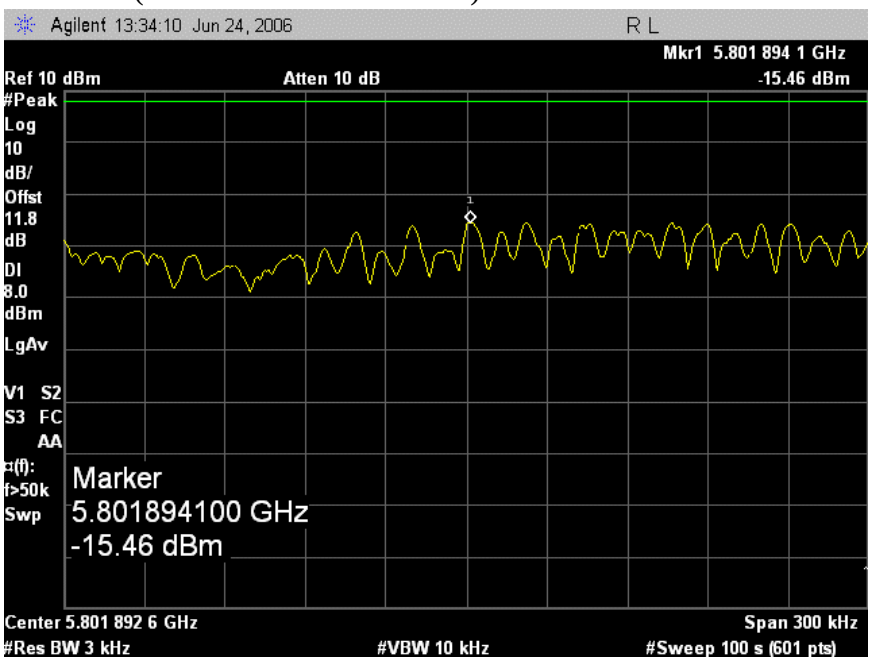

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11n HT20 MODE CHAIN A)

LOW CH (802.11n HT20 mode chain A)

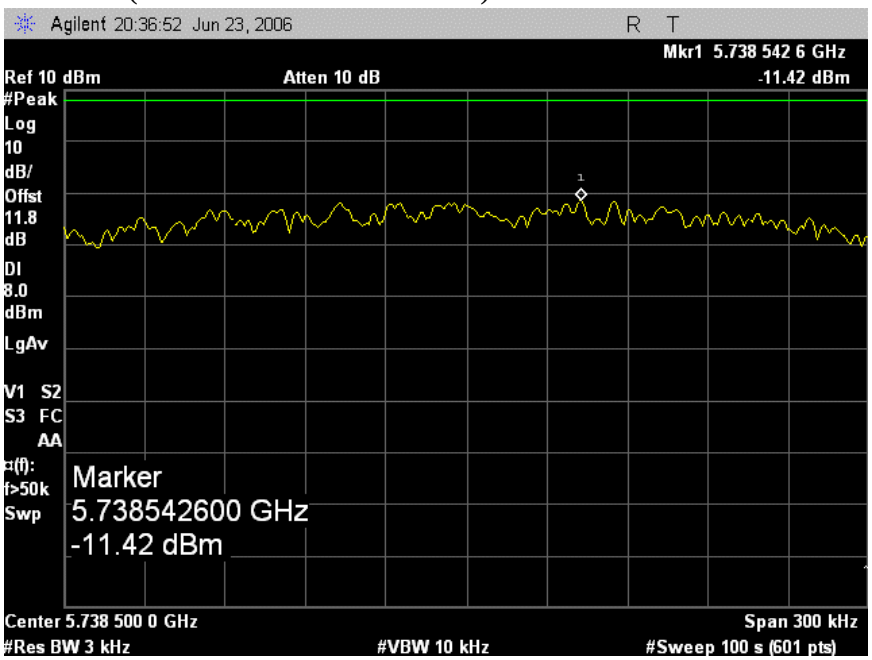

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11n HT20 mode chain A)

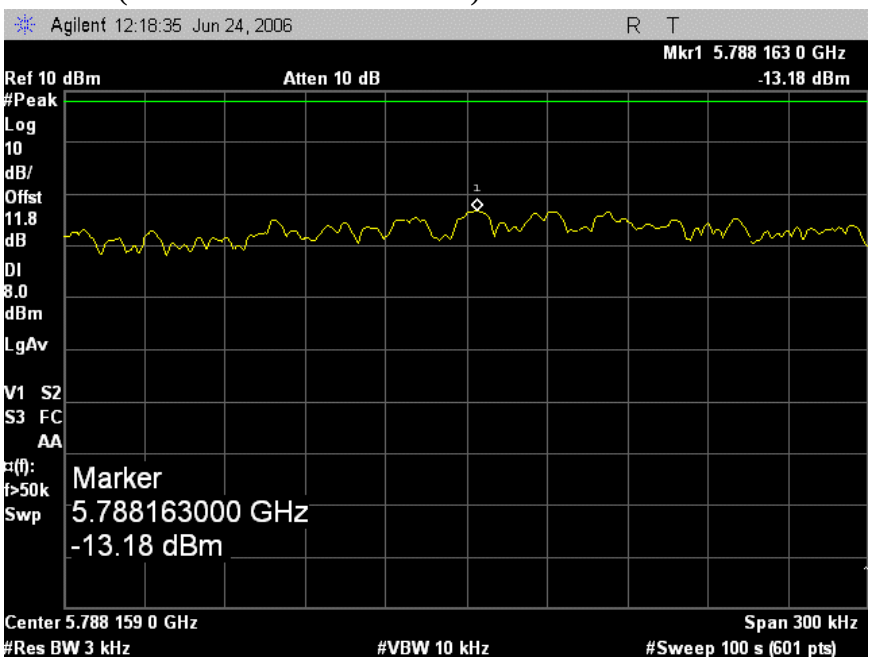

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT20 mode chain A)

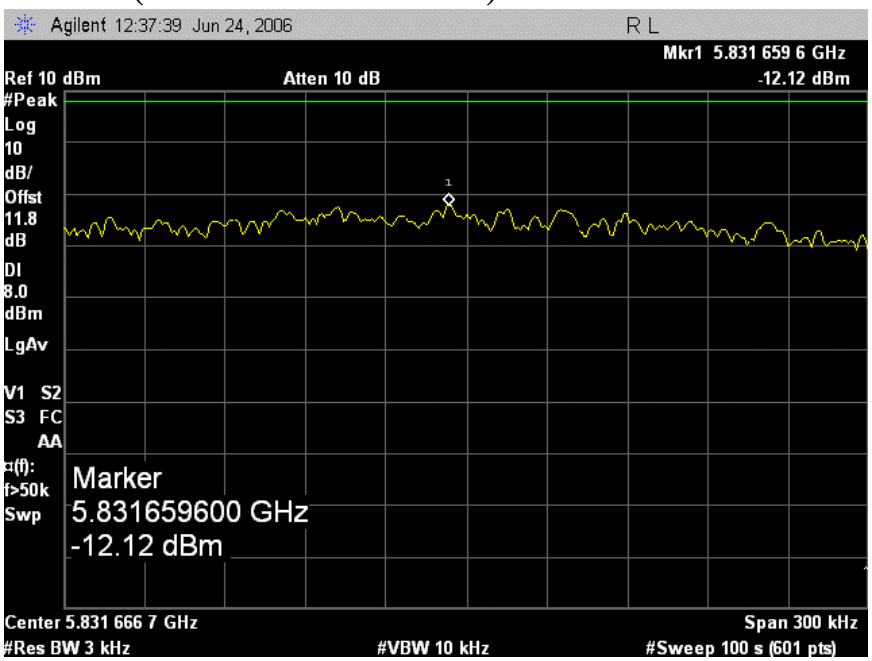

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT20 MODE CHAIN B)

LOW CH (802.11n HT20 mode chain B)

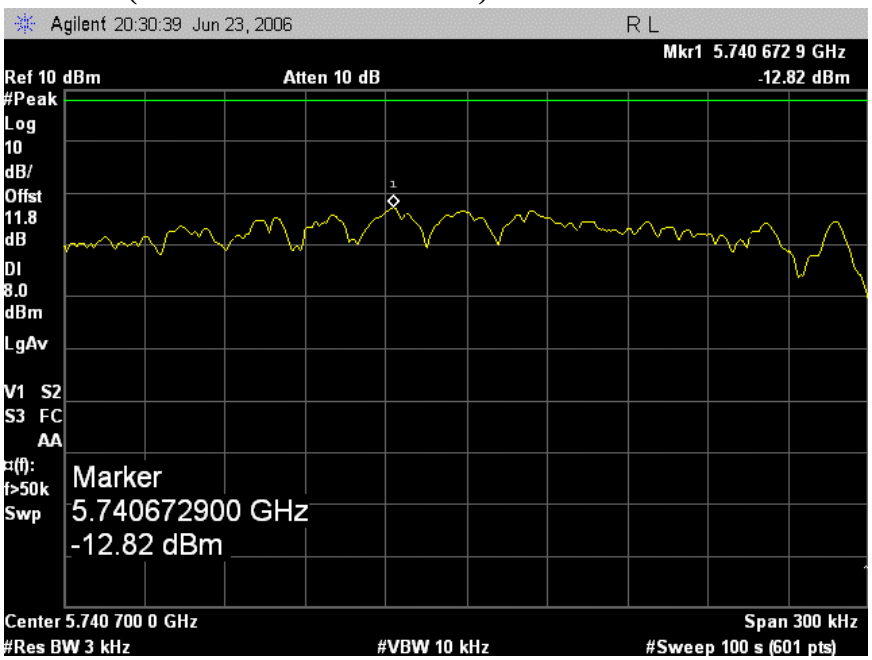

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11n HT20 mode chain B)

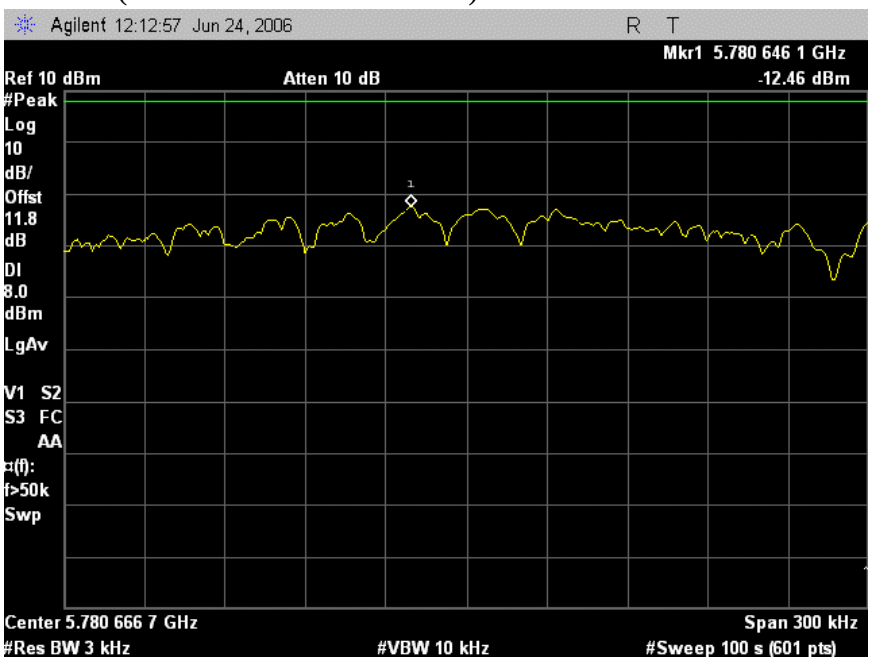

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT20 mode chain B)

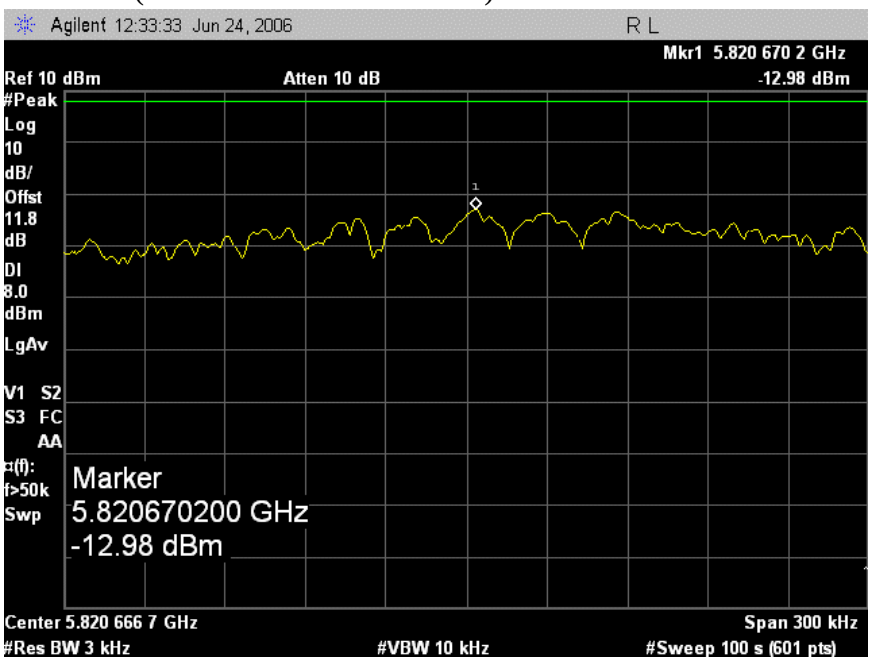

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT40 MODE CHAIN A)

LOW CH (802.11n HT40 mode chain A)

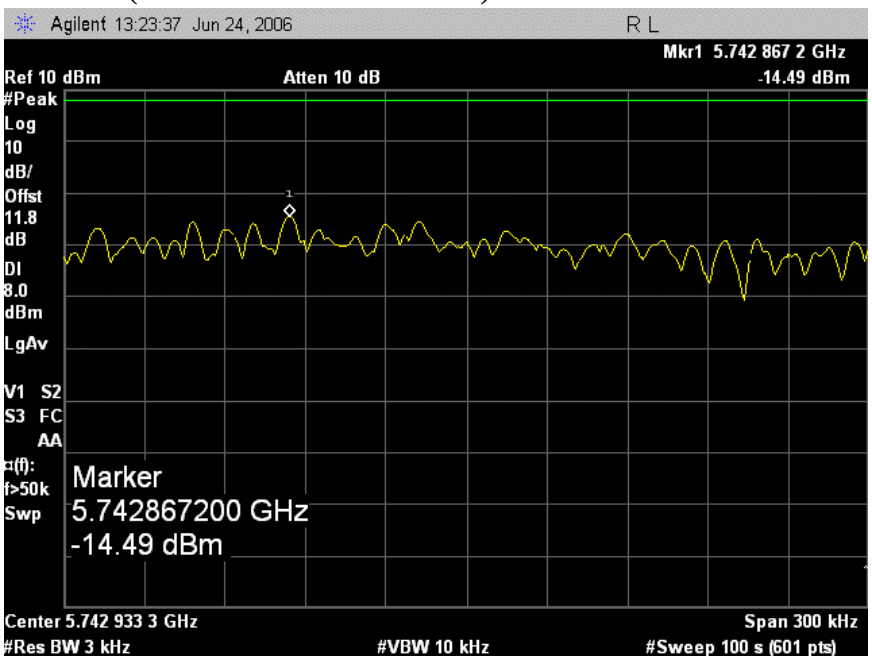

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT40 mode chain A)

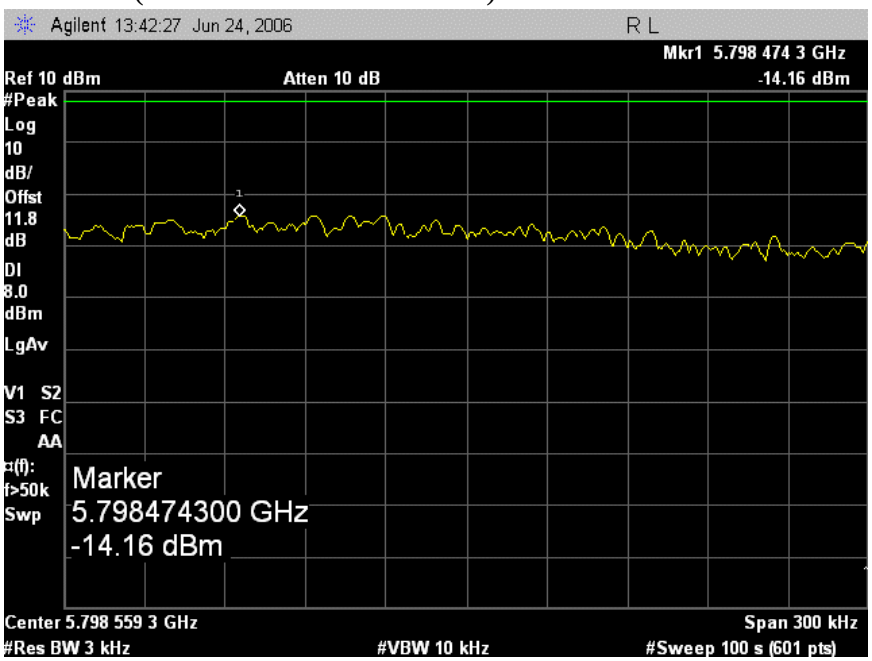

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT40 MODE CHAIN B)

LOW CH (802.11n HT40 mode chain B)

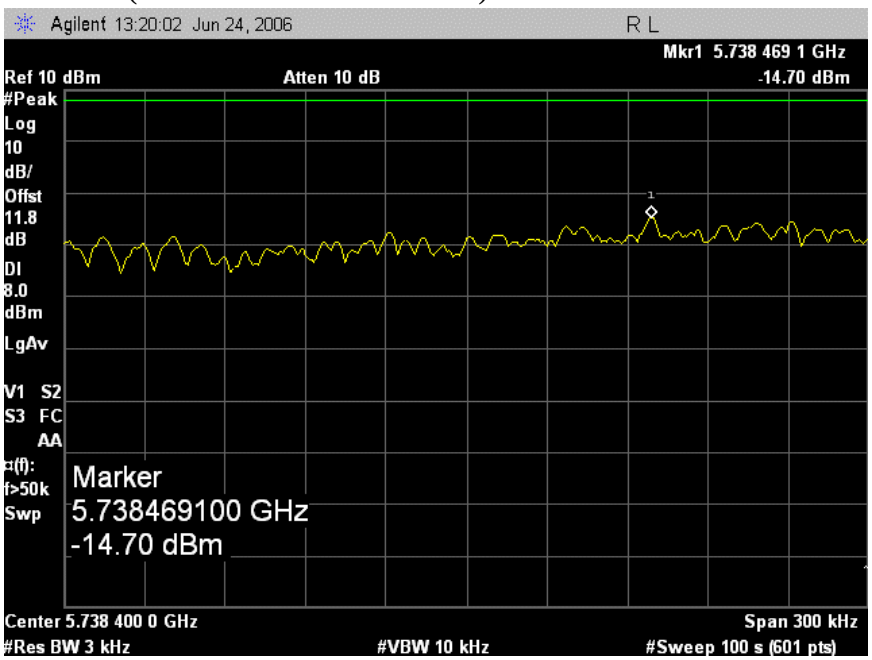

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT40 mode chain B)

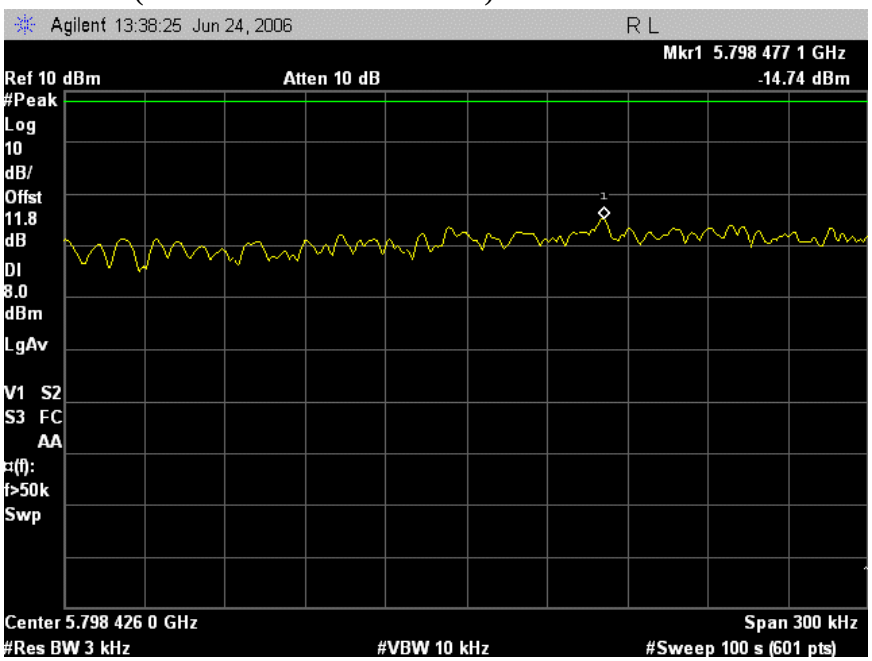

This report shall not be reproduced except in full, without the written approval of CCS.

PLOTS USING COMBINER

(802.11a 20M MODE)

LOW CH (802.11a mode 20M)

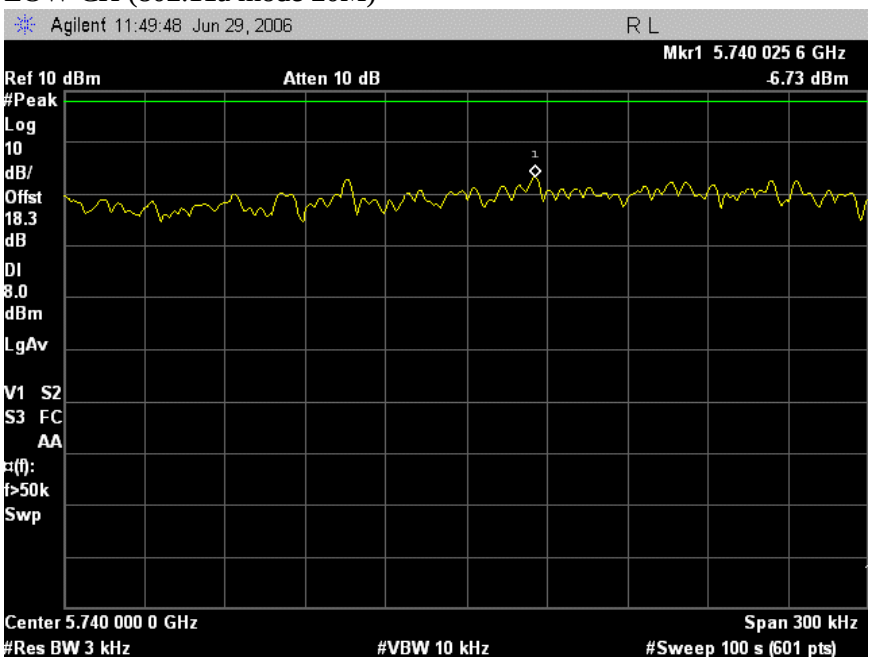

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11a 20M mode)

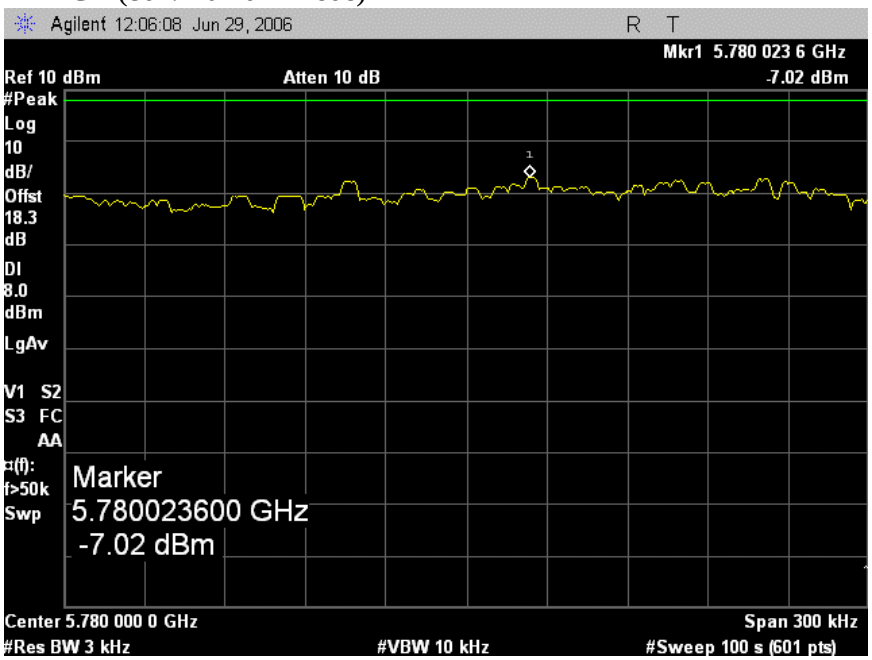

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 20M mode)

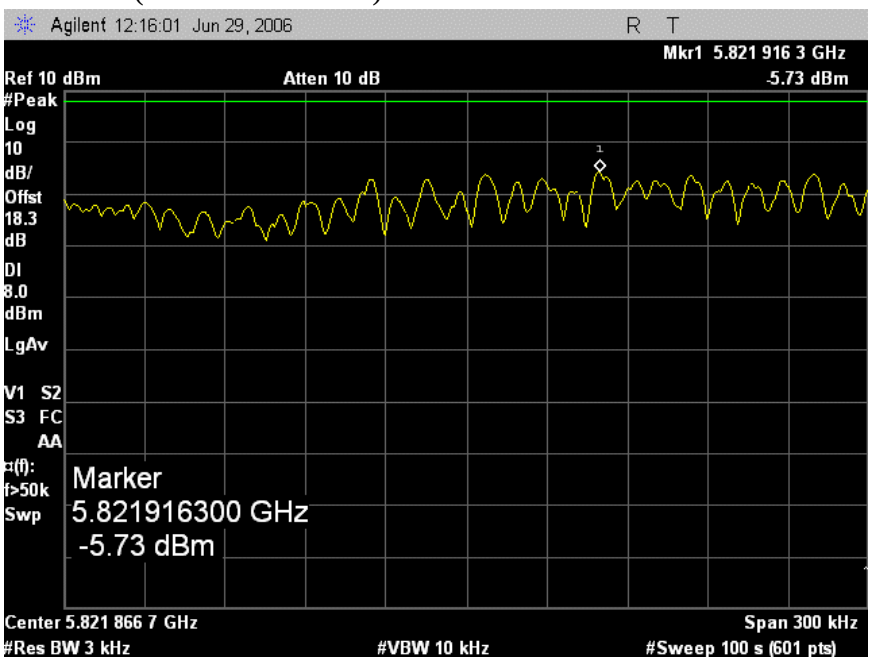

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11a 40M MODE)

LOW CH (802.11a mode 40M)

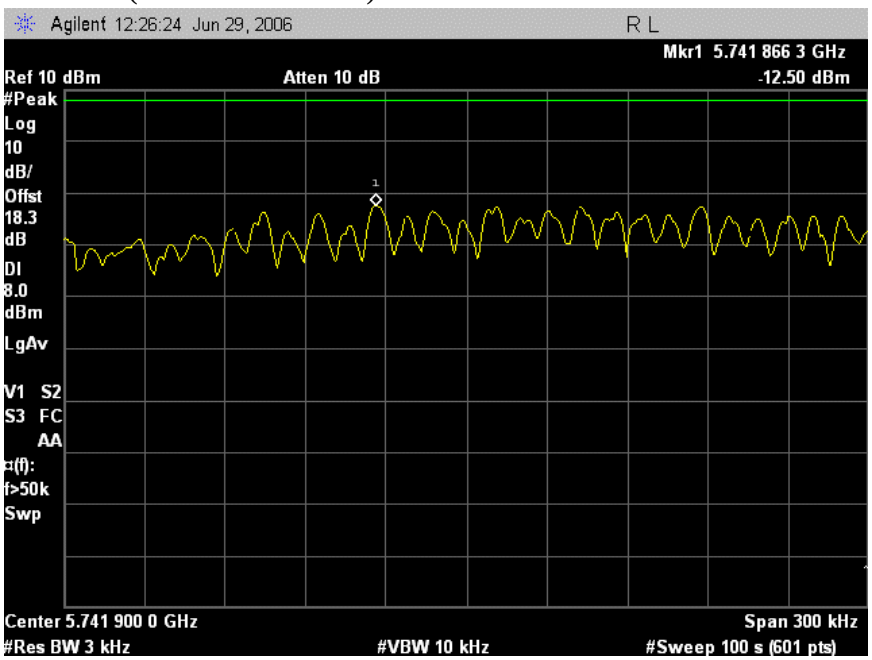

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11a 40M mode)

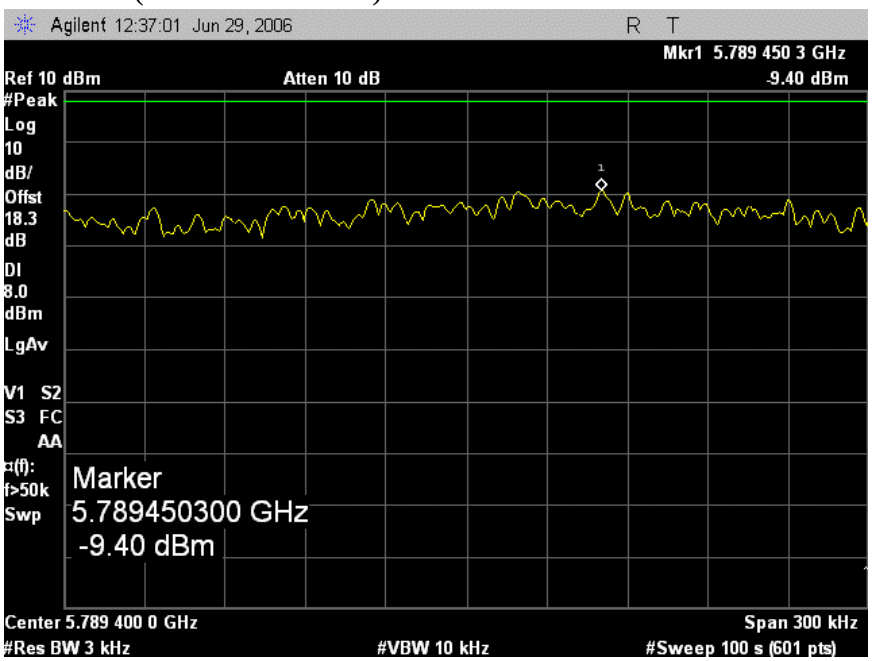

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11n HT20 MODE)

LOW CH (802.11n HT20 mode)

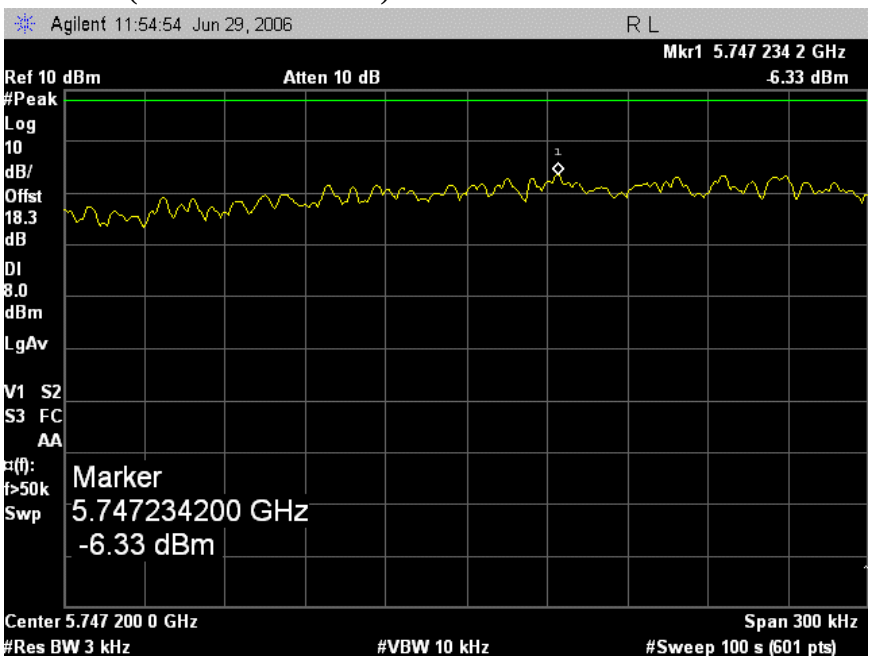

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH (802.11n HT20 mode)

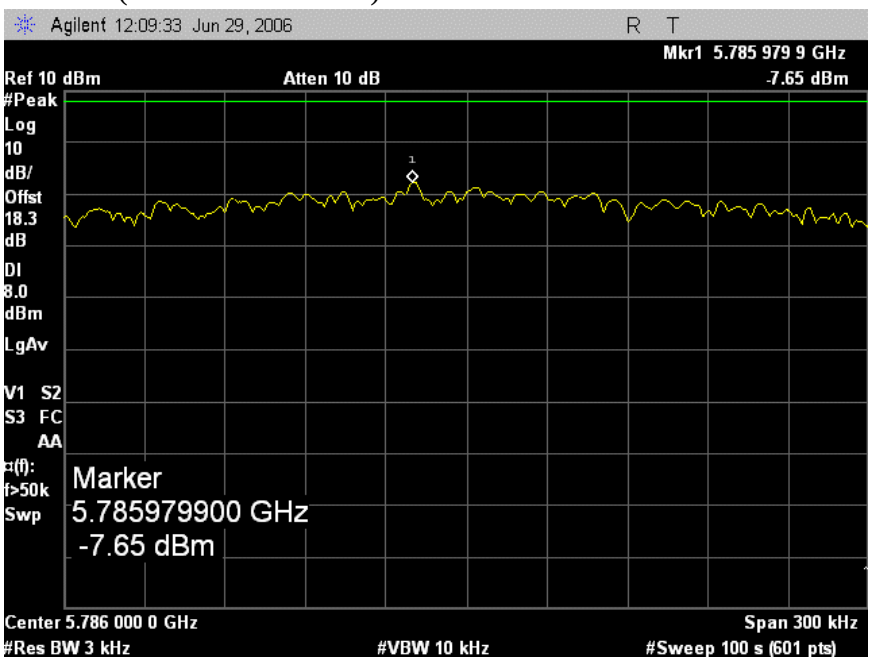

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT20 mode)

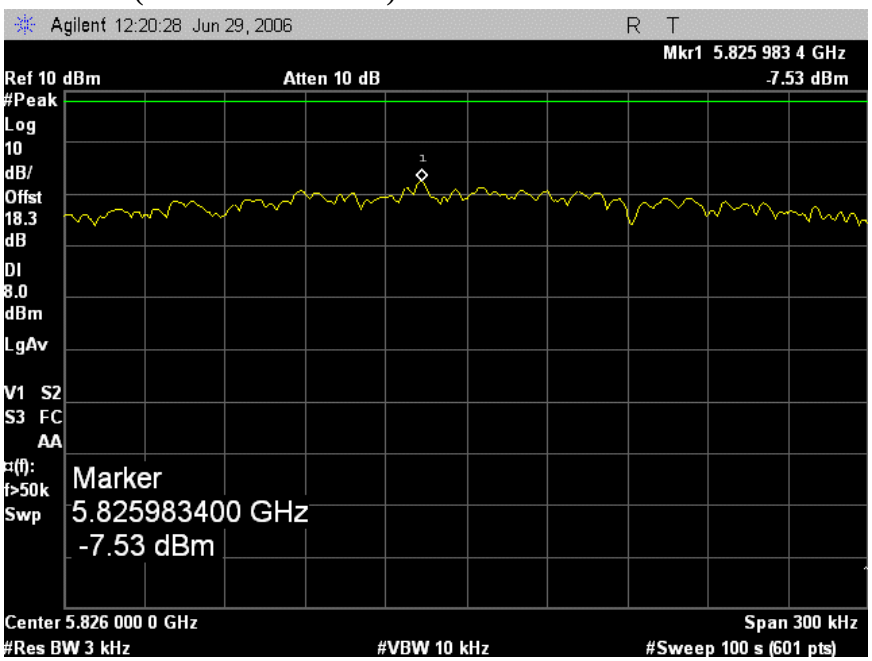

This report shall not be reproduced except in full, without the written approval of CCS.

(802.11 HT40 MODE)

LOW CH (802.11n HT40 mode)

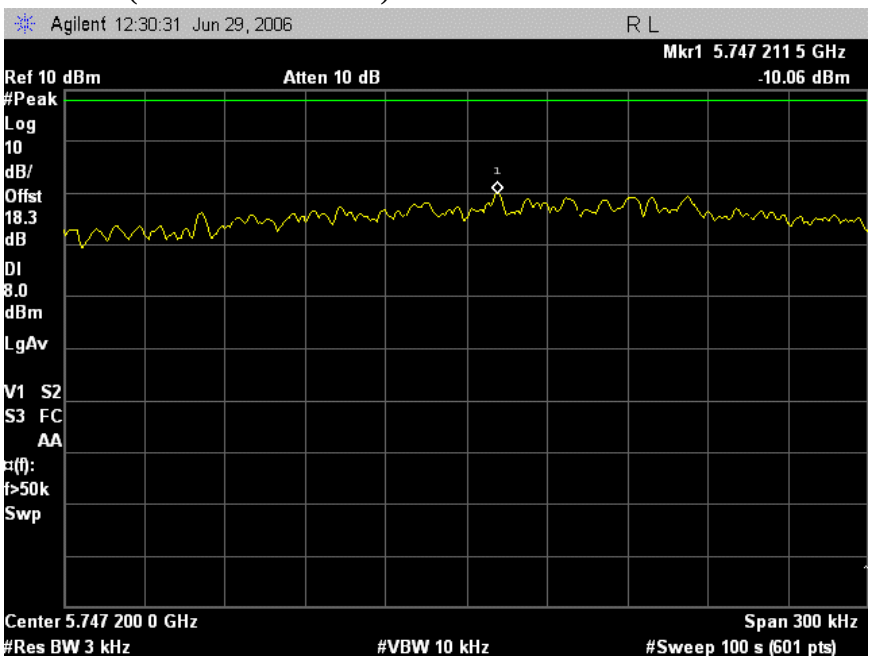

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH (802.11n HT40 mode)

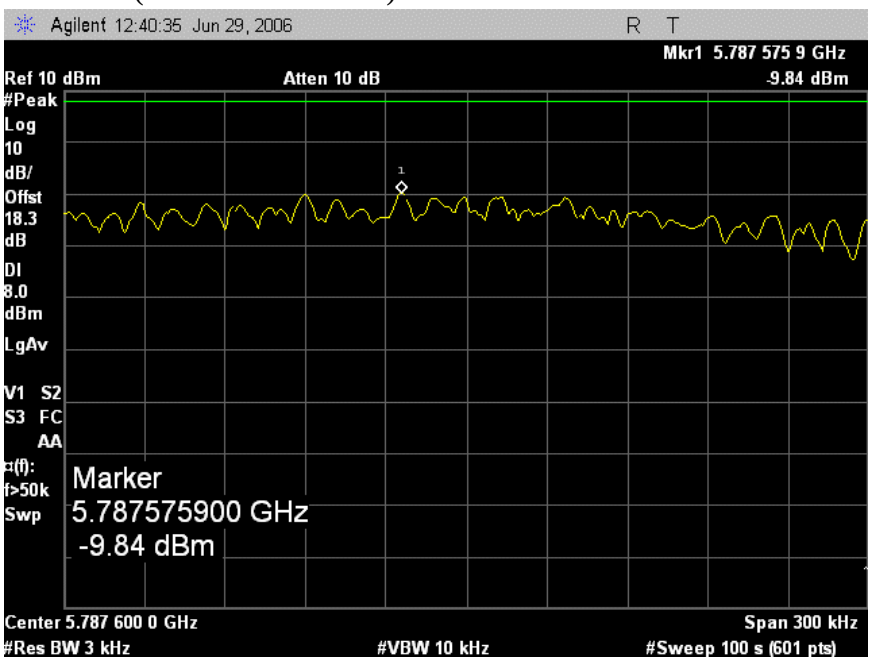

This report shall not be reproduced except in full, without the written approval of CCS.

7.2.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS

No non-compliance noted:

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11a 20M MODE CHAIN A)

LOW CH BANDEDGE (802.11a 20M mode chain A)

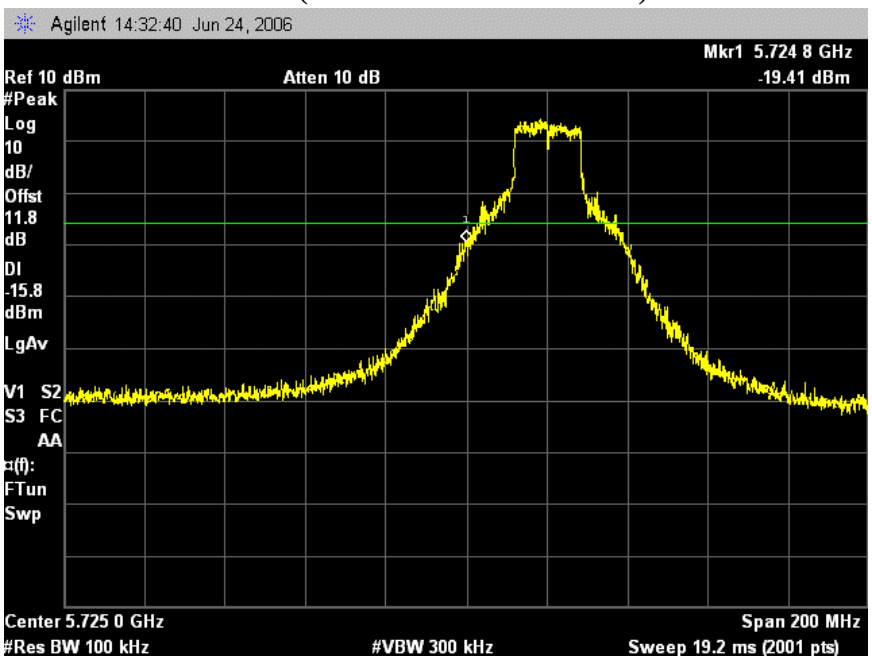

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11a 20M mode chain A)

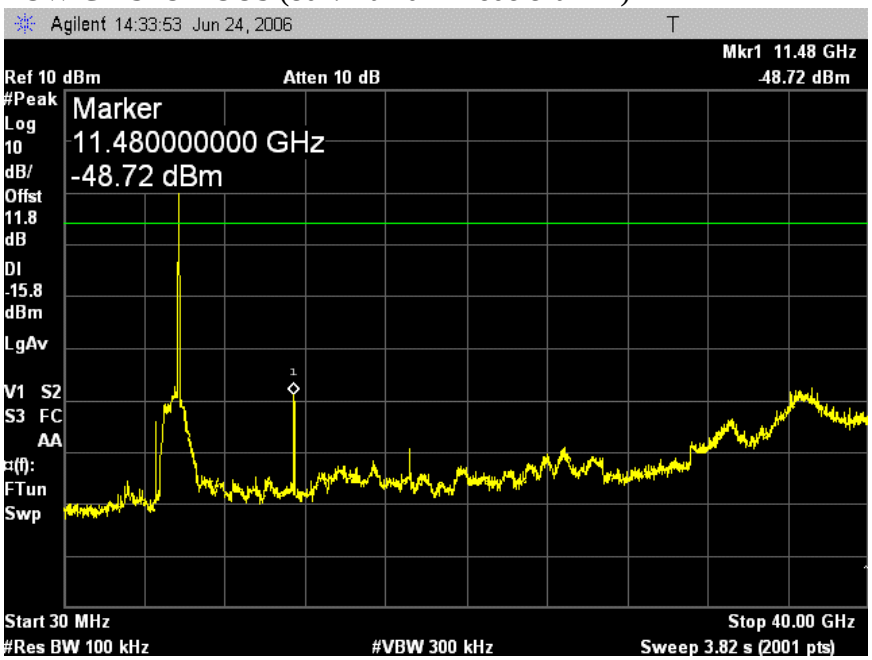

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH REFERENCE (802.11a 20M mode chain A)

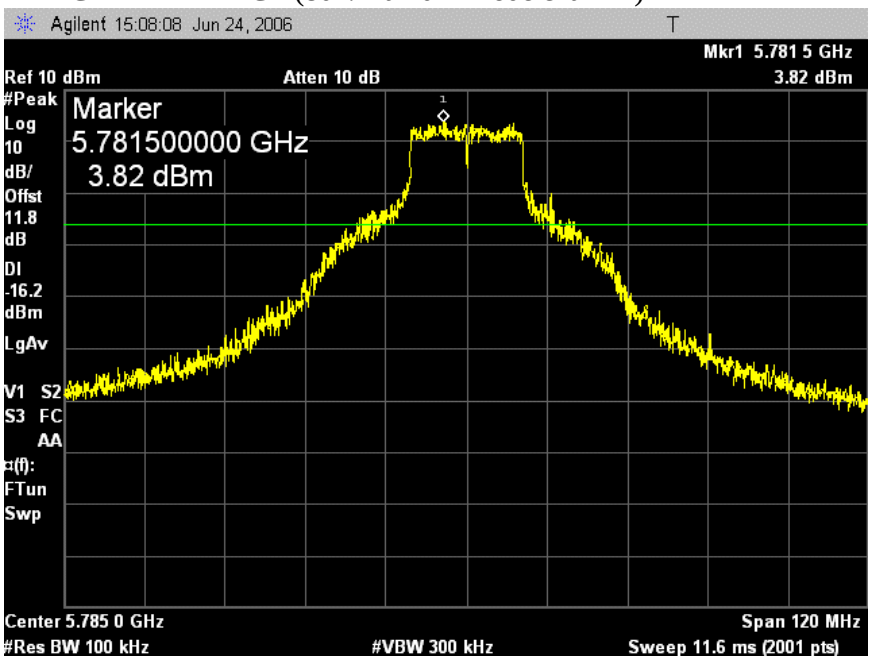

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11a 20M mode chain A)

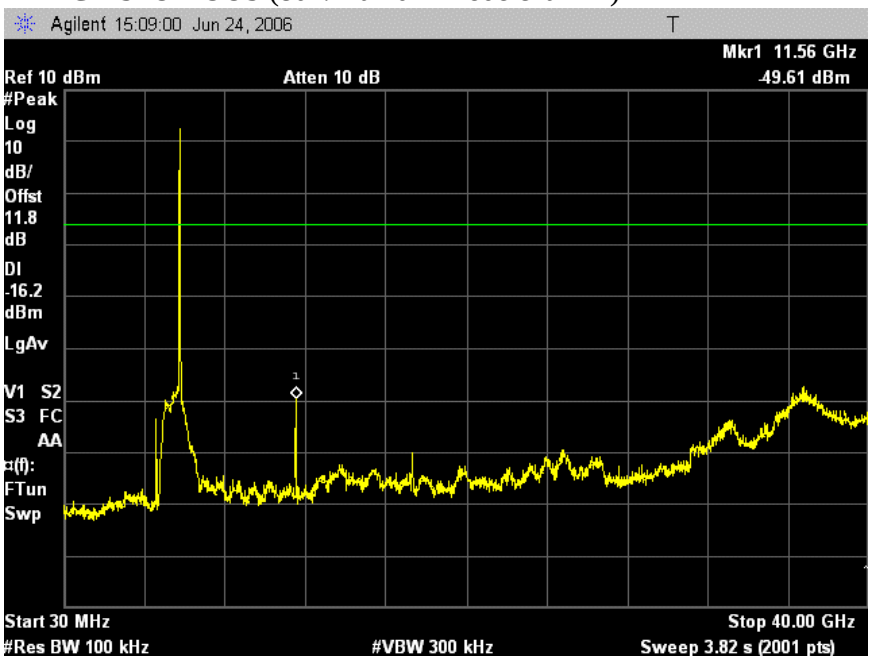

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11a 20M mode chain A)

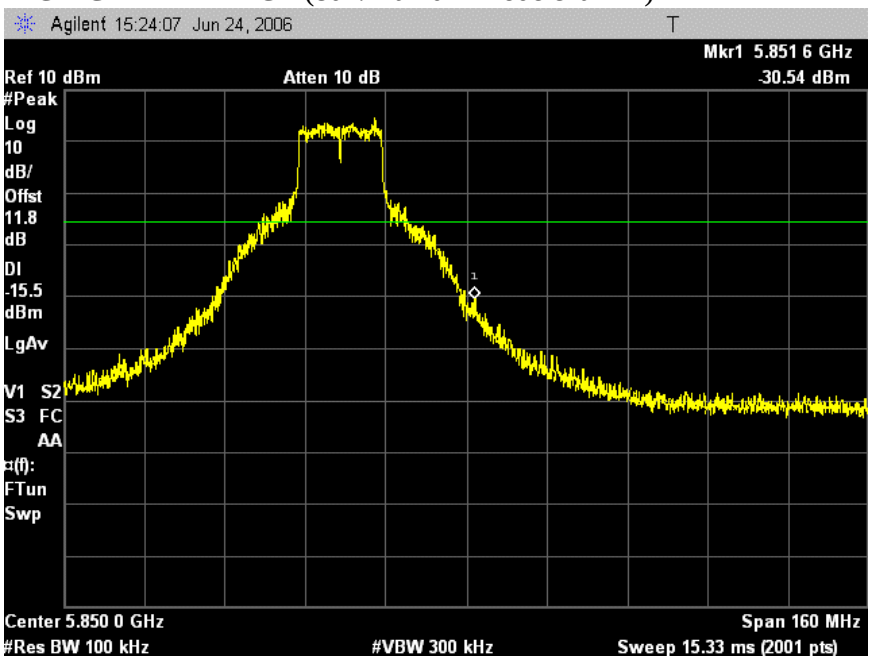

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11a 20M mode chain A)

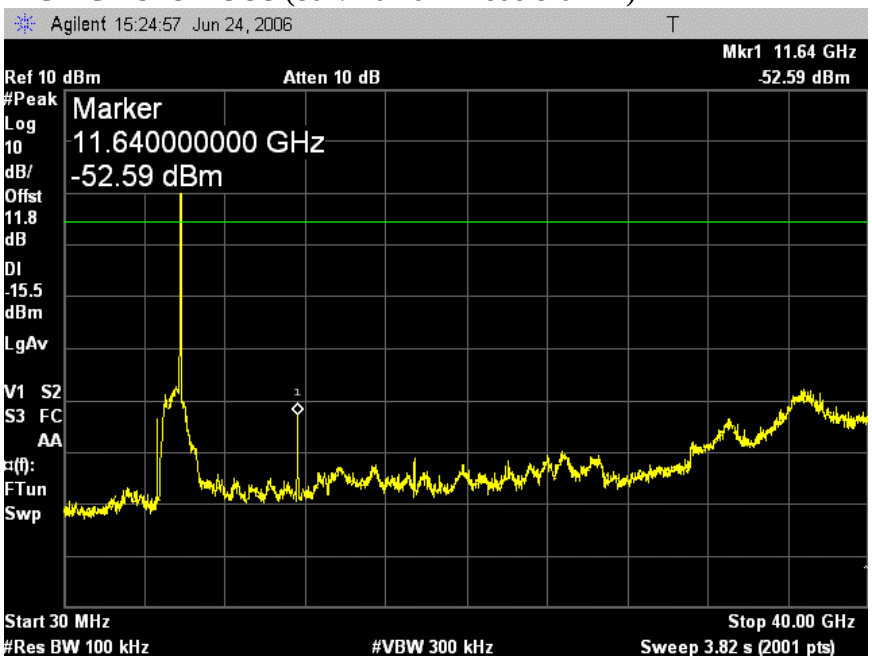

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11a 20M MODE CHAIN B)

LOW CH BANDEDGE (802.11a 20M mode chain B)

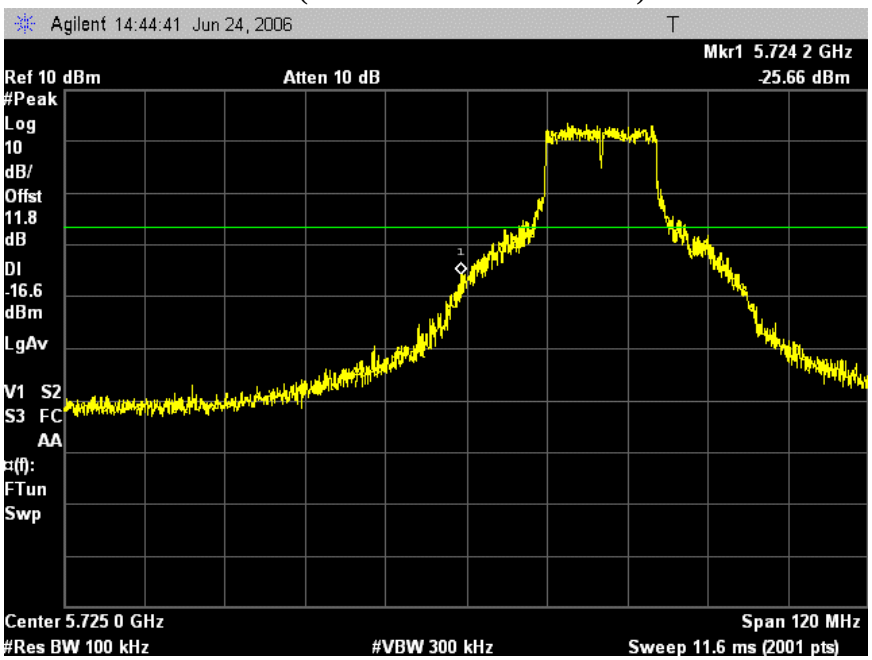

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11a 20M mode chain B)

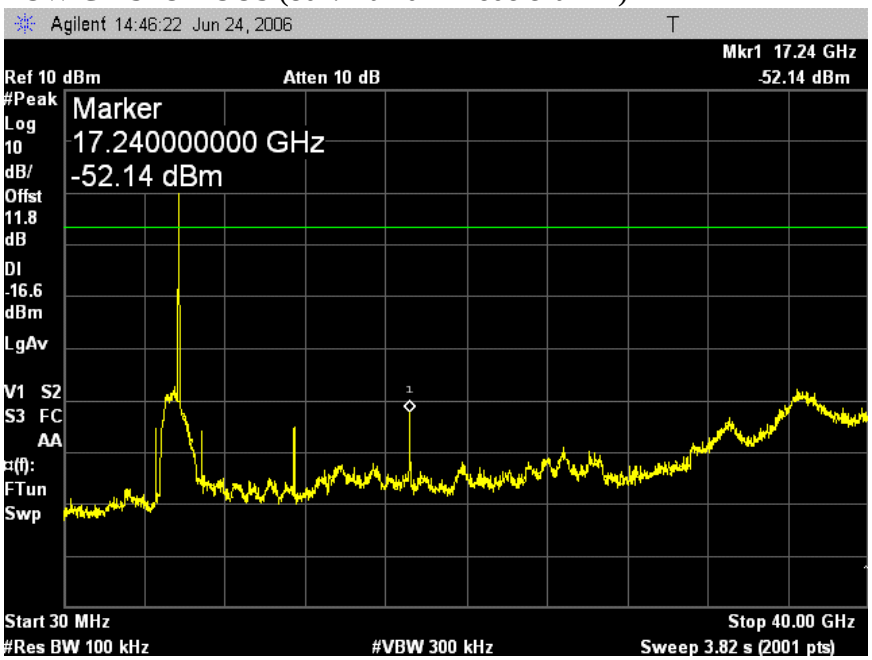

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH REFERENCE (802.11a 20M mode chain B)

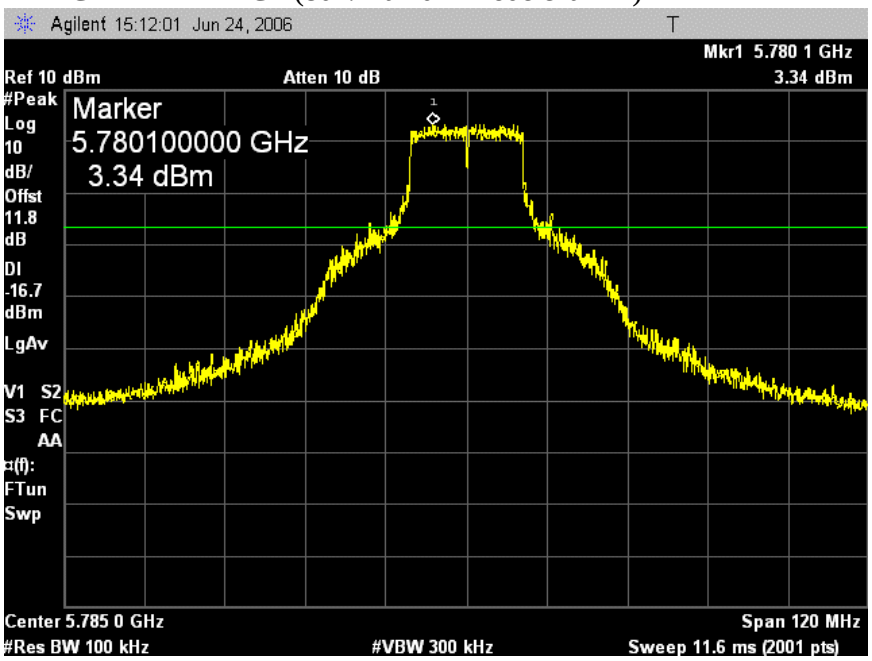

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11a 20M mode chain B)

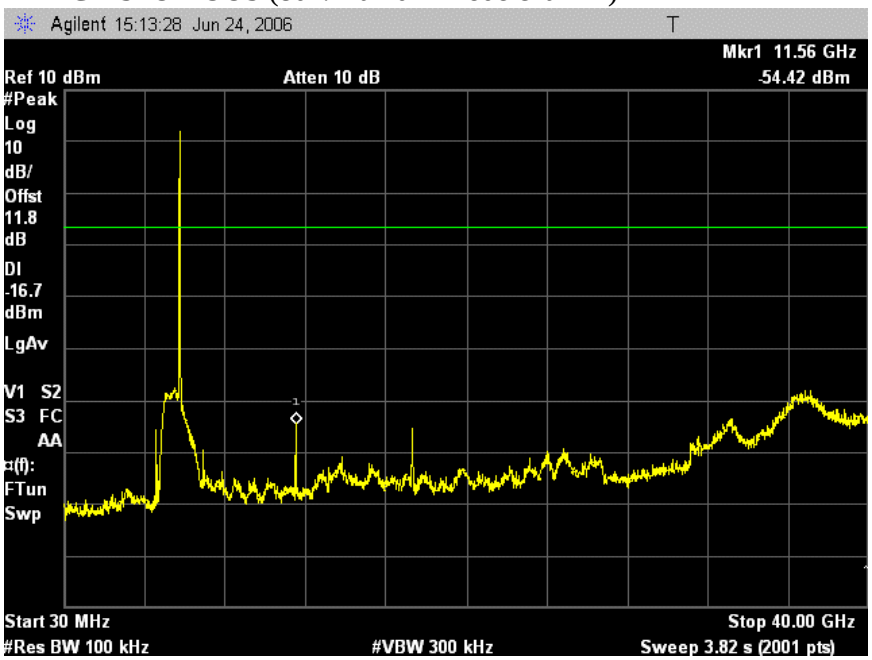

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11a 20M mode chain B)

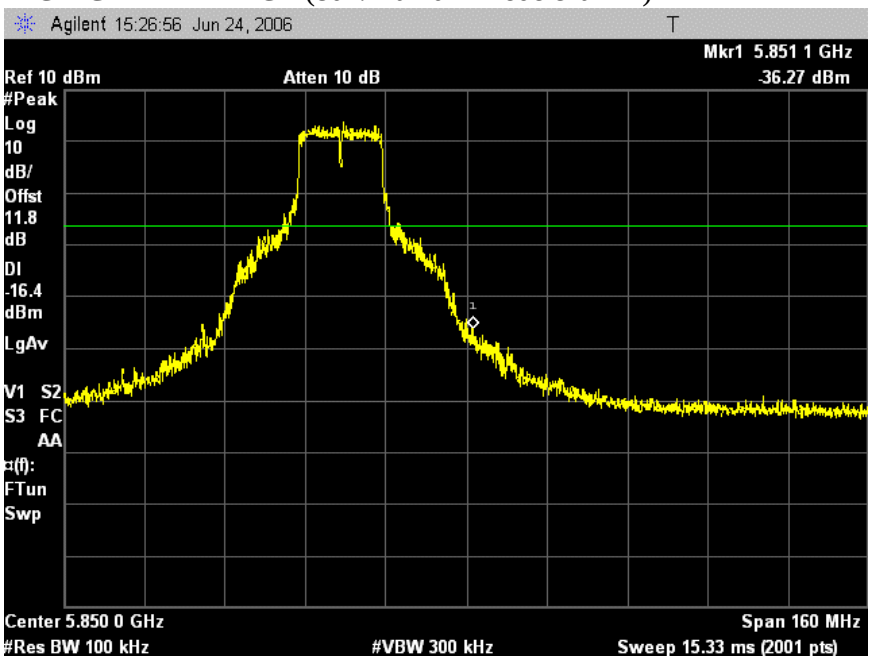

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11a 20M mode chain B)

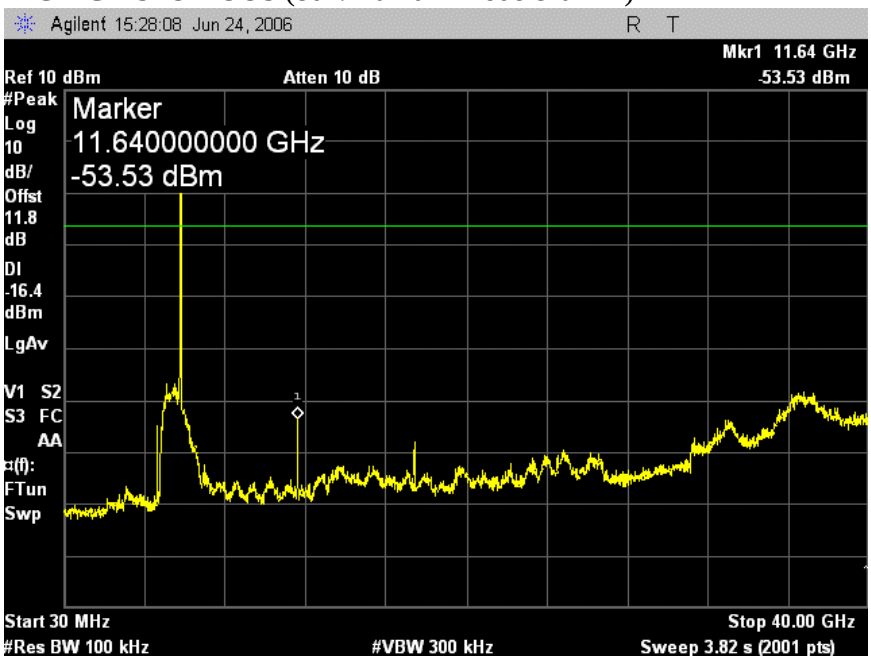

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11a 40M MODE CHAIN A)

LOW CH BANDEDGE (802.11a 40M mode chain A)

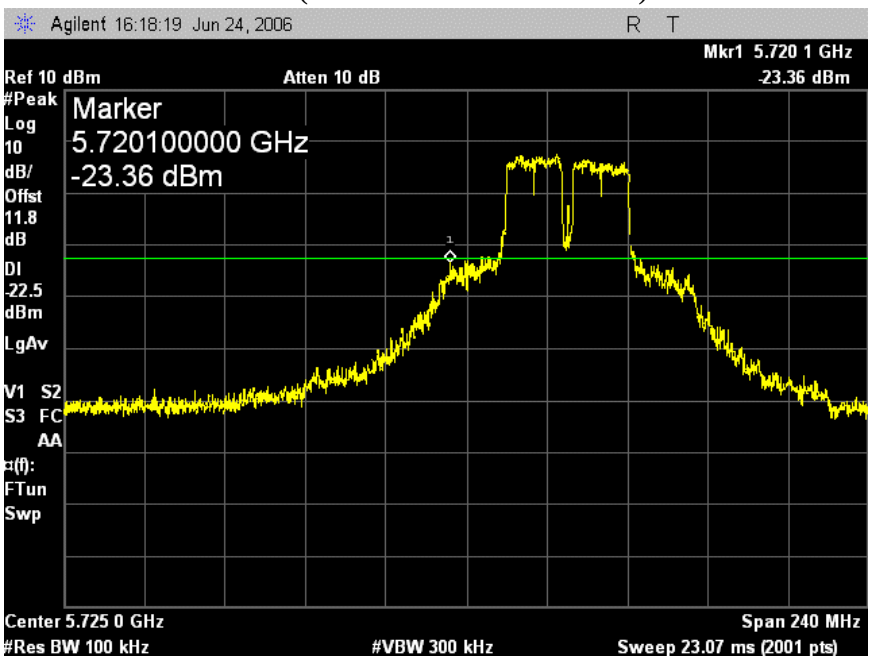

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11a 40M mode chain A)

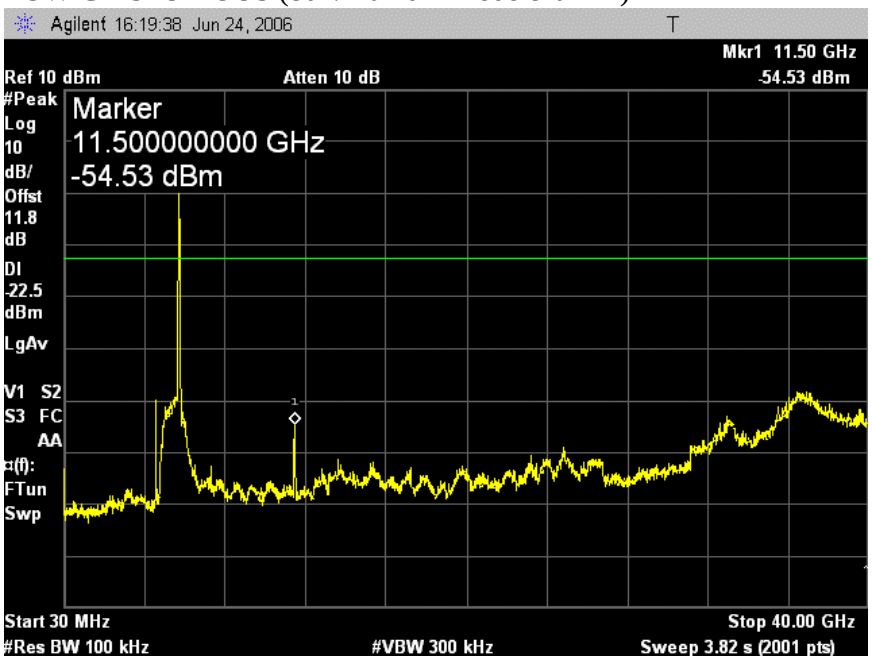

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11a 40M mode chain A)

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11a 40M mode chain A)

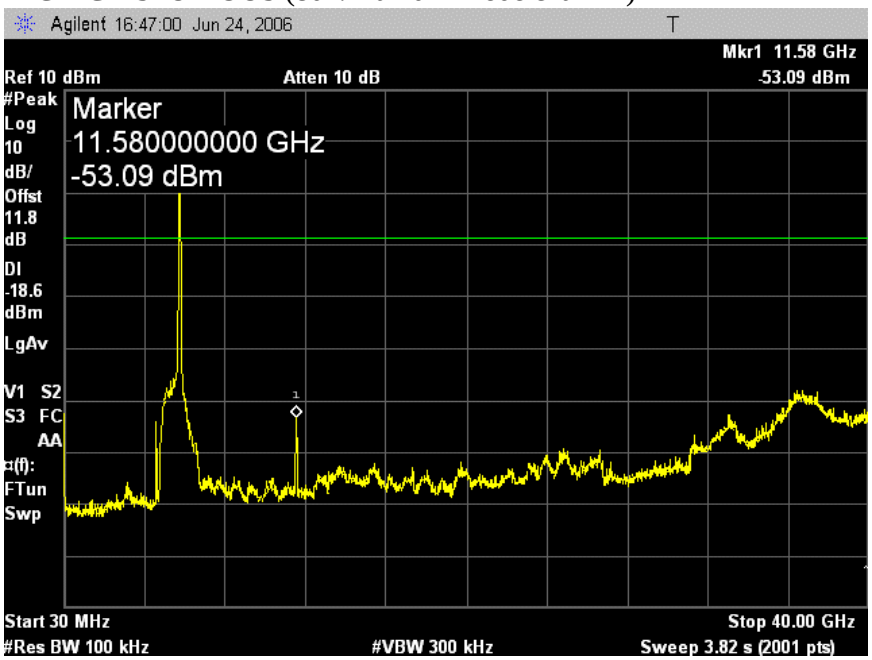

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11a 40M MODE CHAIN B)

LOW CH BANDEDGE (802.11a 40M mode chain B)

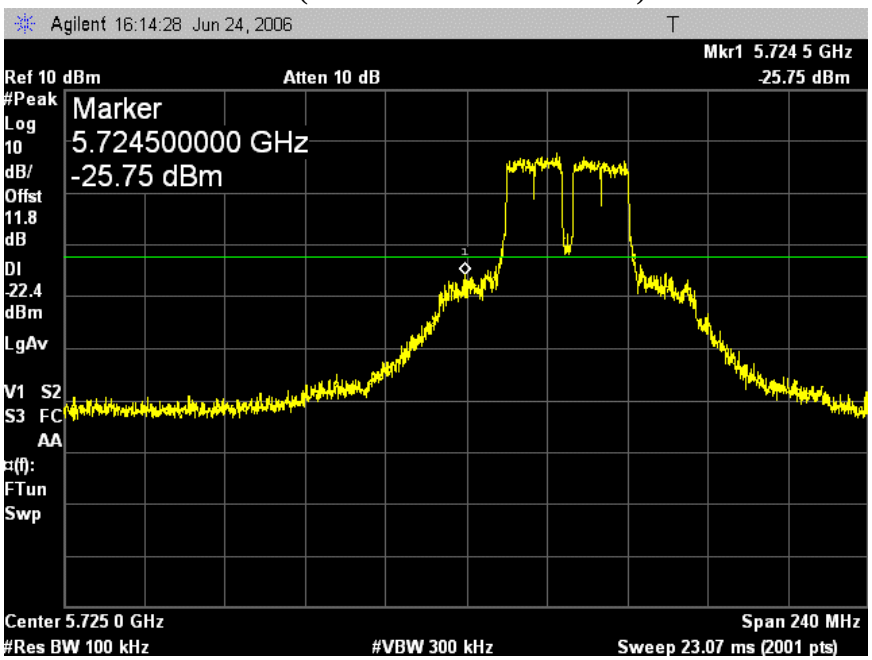

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11a 40M mode chain B)

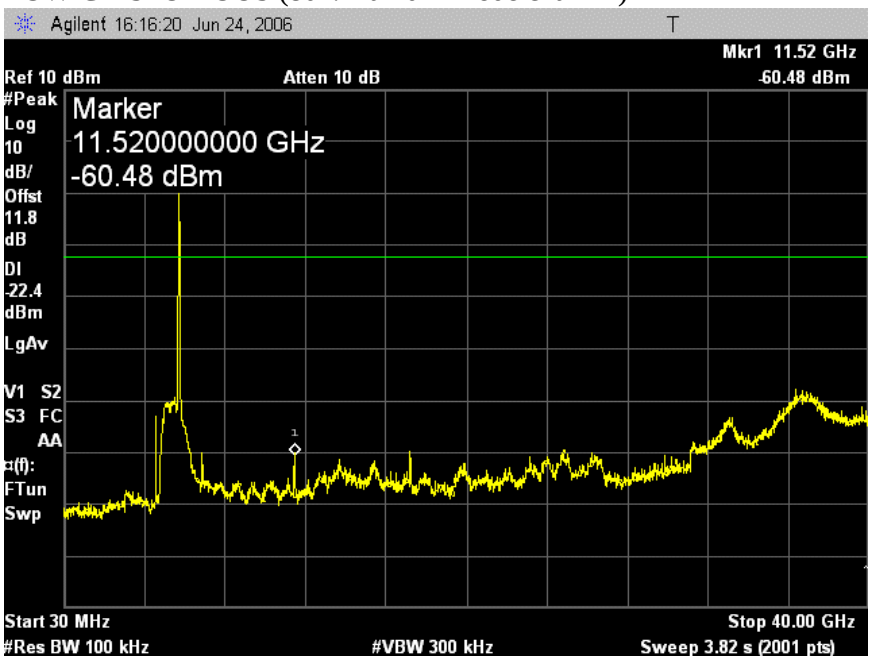

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11a 40M mode chain B)

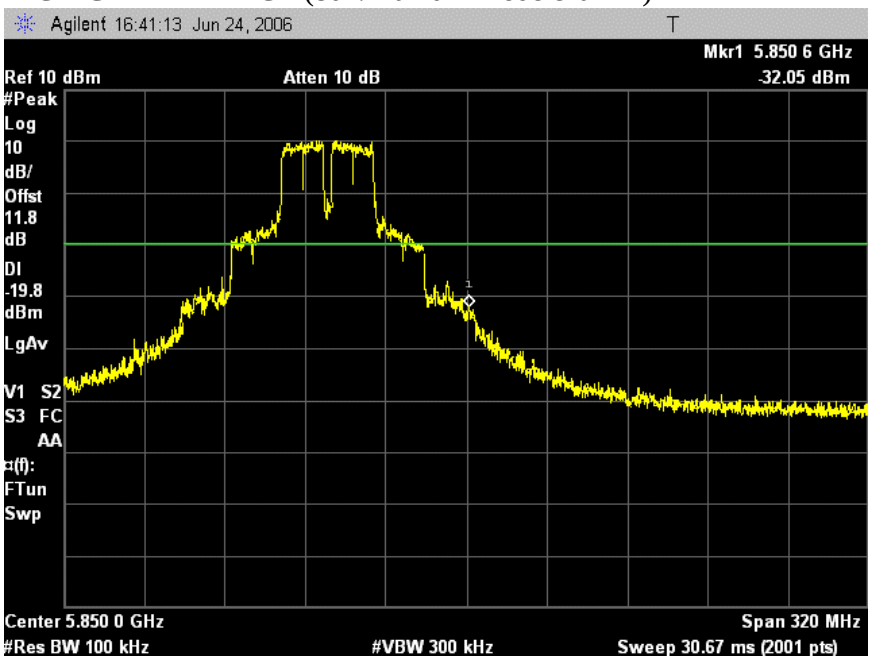

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11a 40M mode chain B)

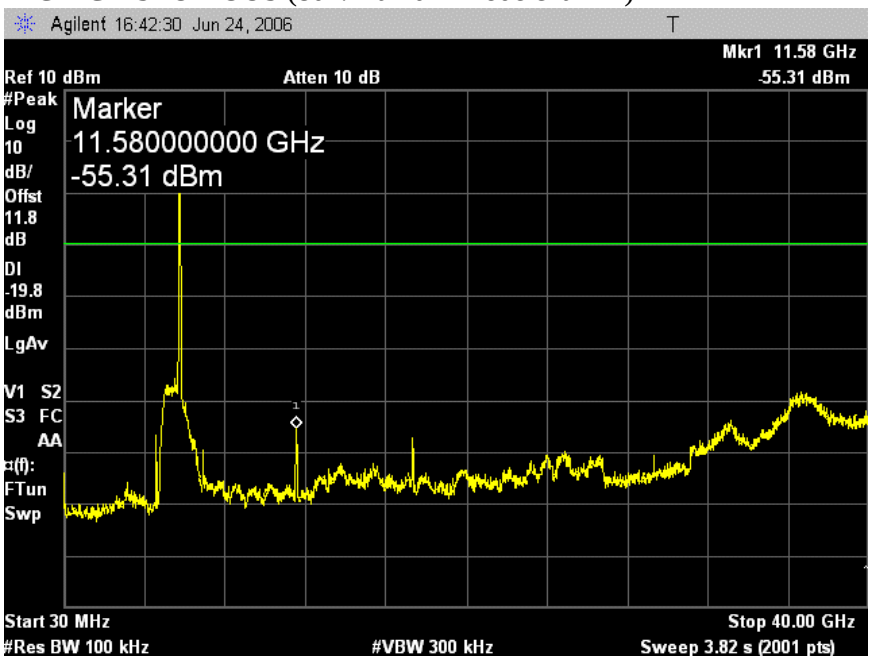

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11n HT20 MODE CHAIN A)

LOW CH BANDEDGE (802.11n HT20 mode chain A)

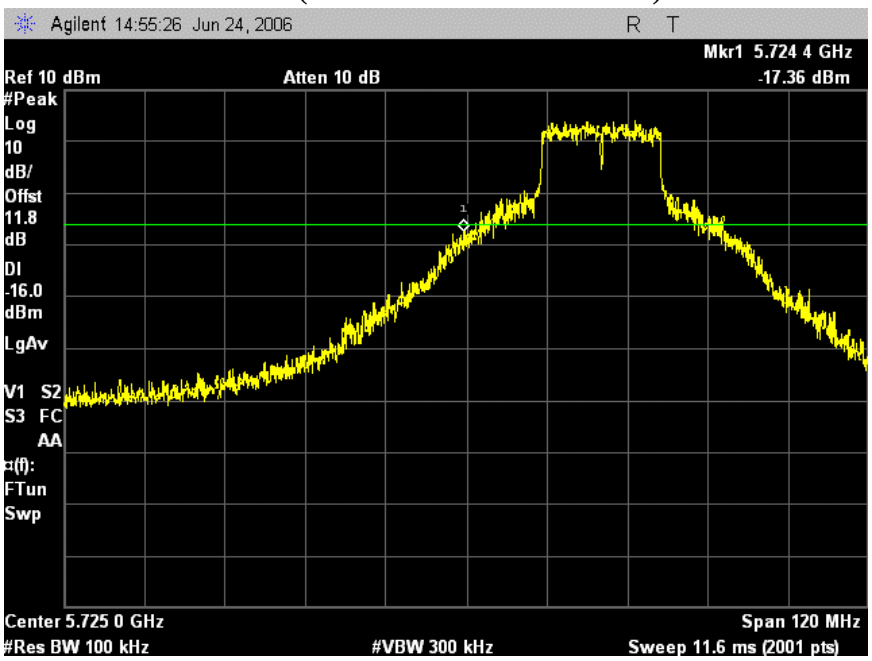

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11n HT20 mode chain A)

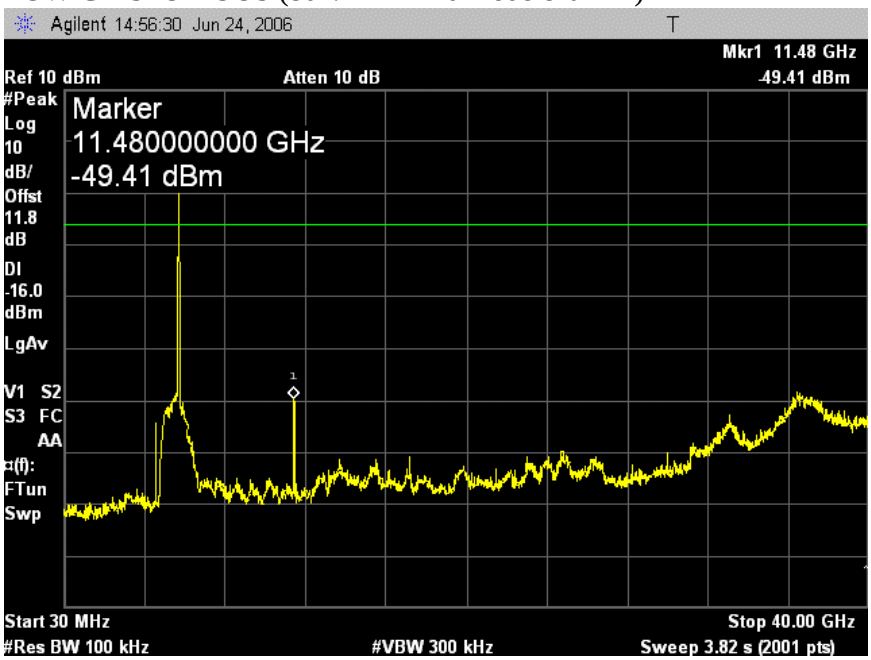

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH REFERENCE (802.11n HT20 mode chain A)

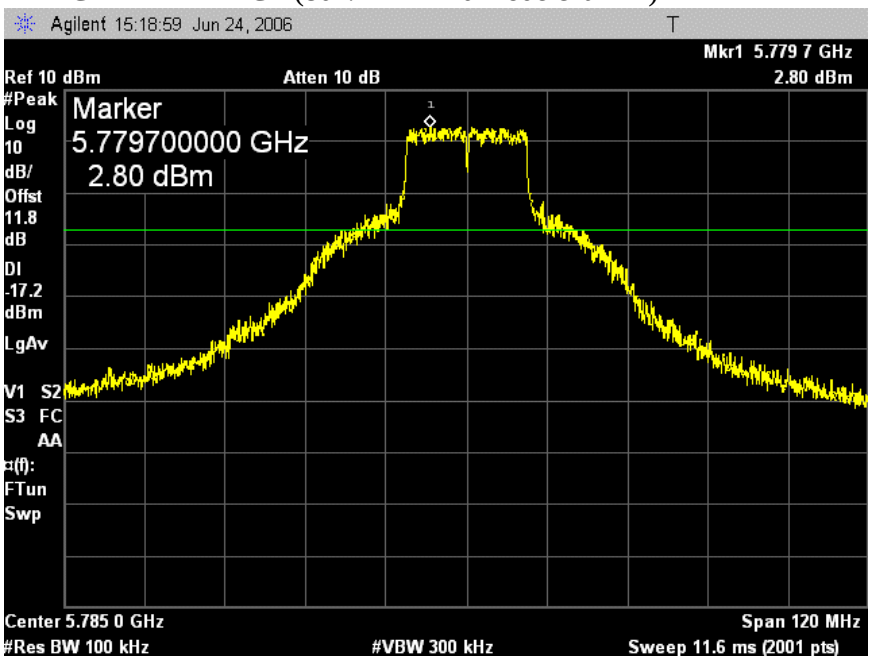

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11n HT20 mode chain A)

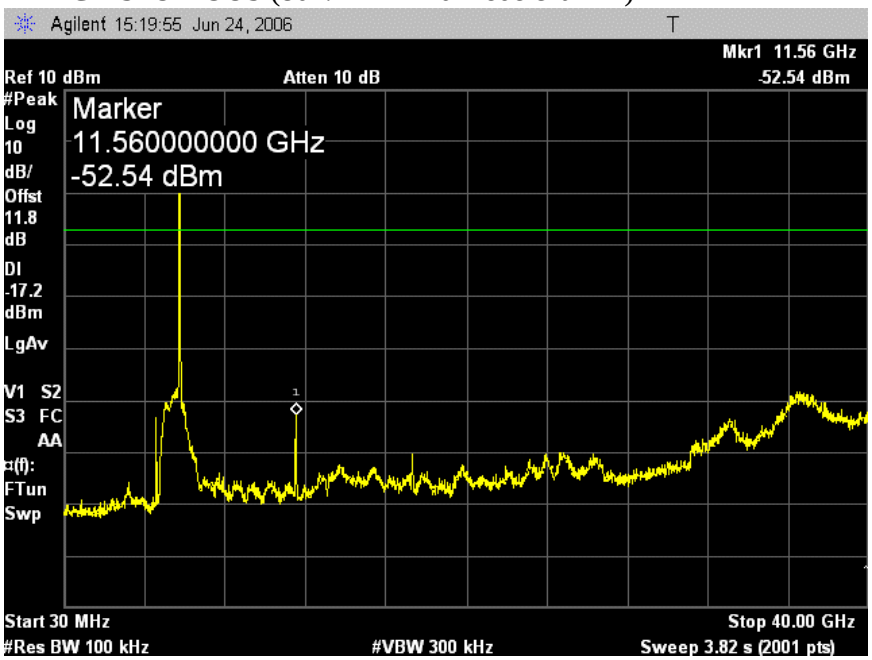

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11n HT20 mode chain A)

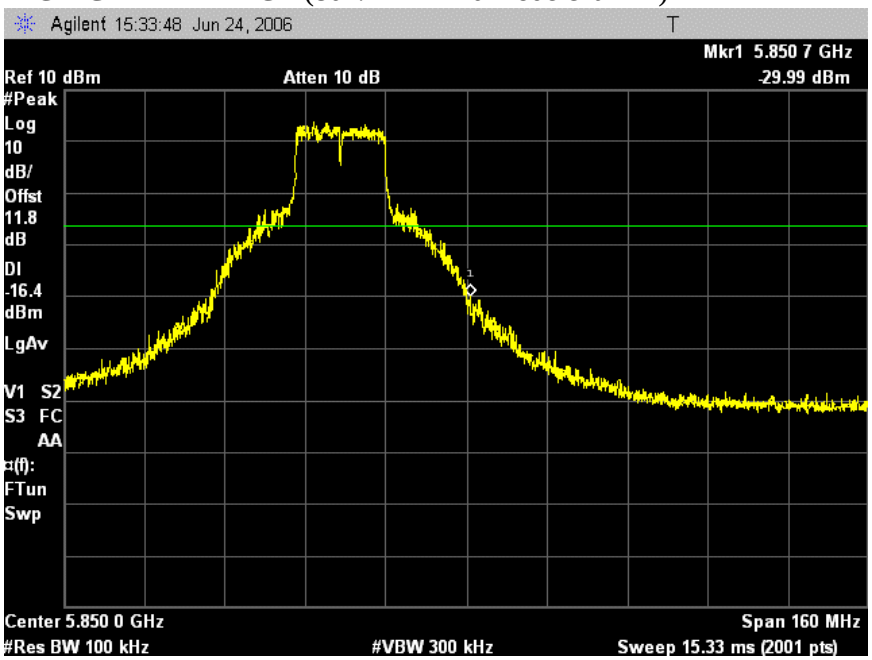

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11n HT20 mode chain A)

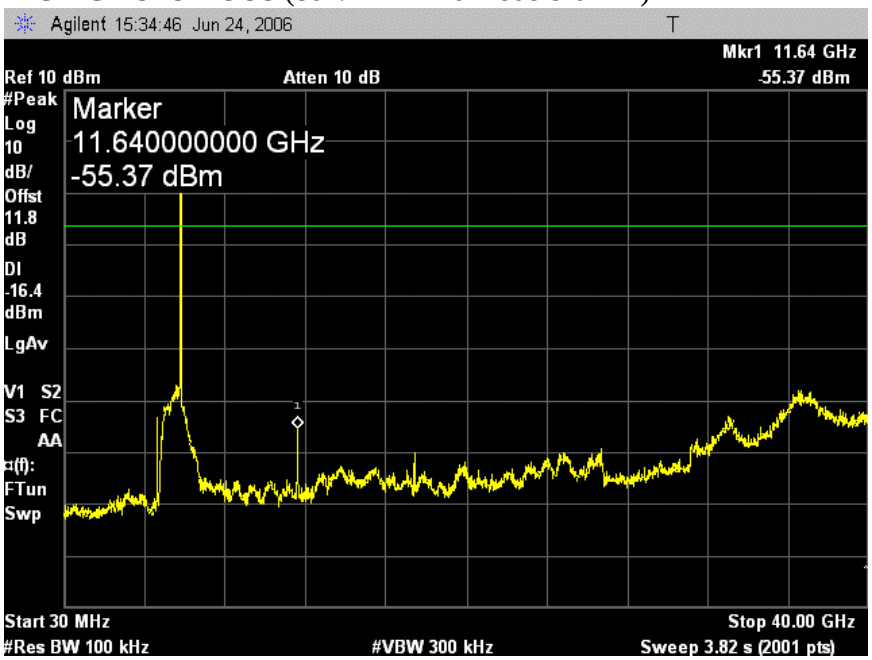

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11 HT20 MODE CHAIN B)

LOW CH BANDEDGE (802.11n HT20 mode chain B)

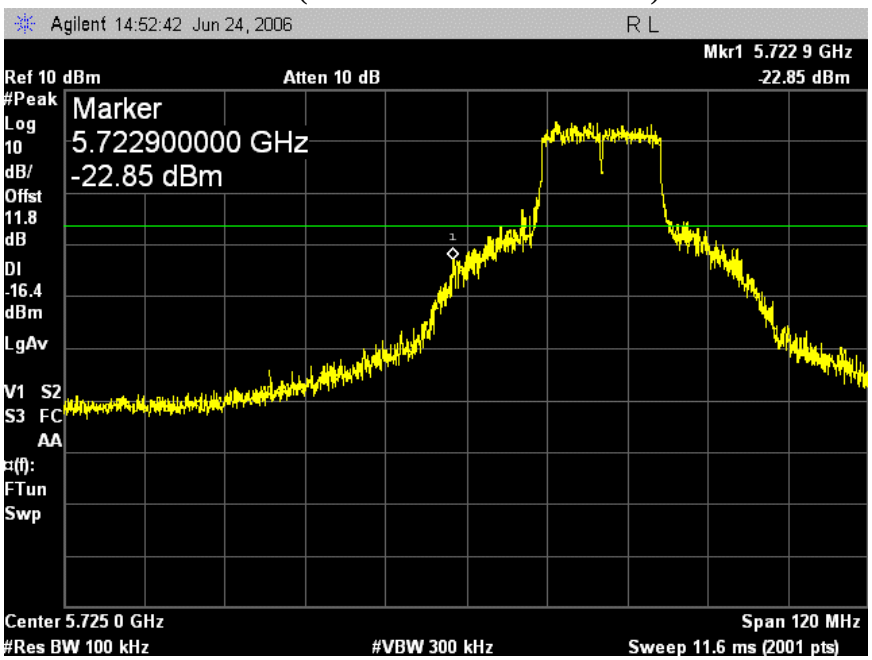

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11n HT20 mode chain B)

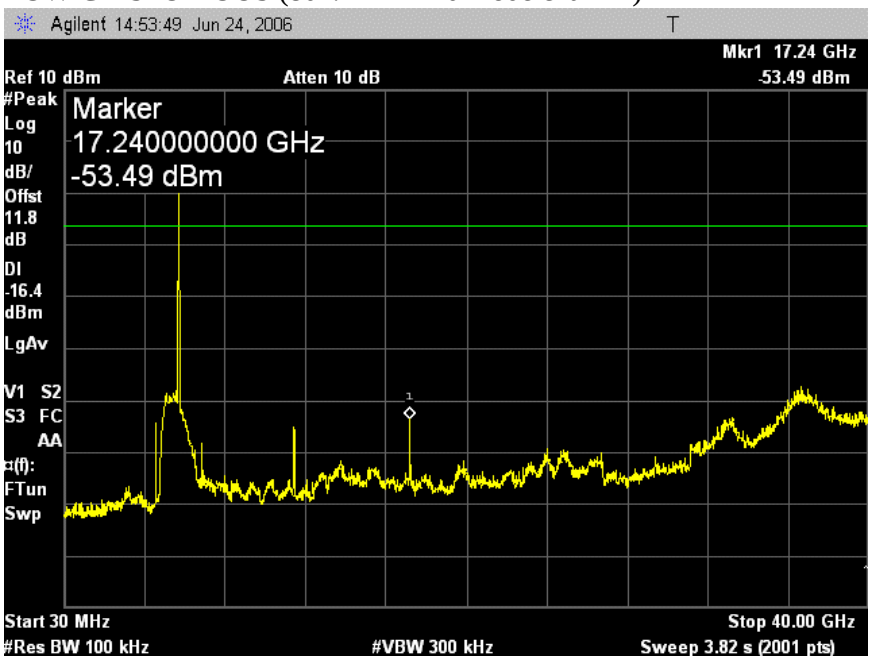

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH REFERENCE (802.11n HT20 mode chain B)

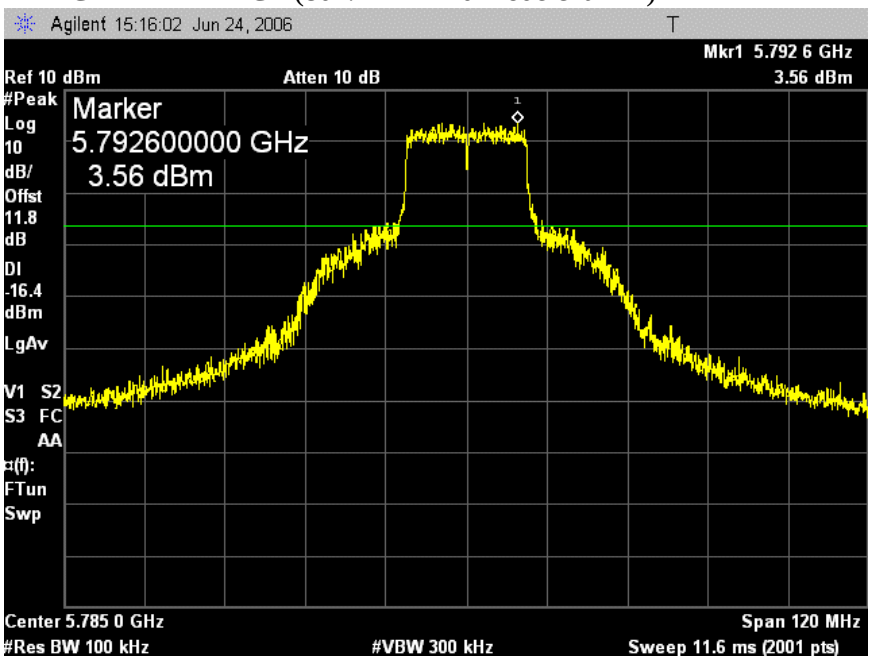

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11n HT20 mode chain B)

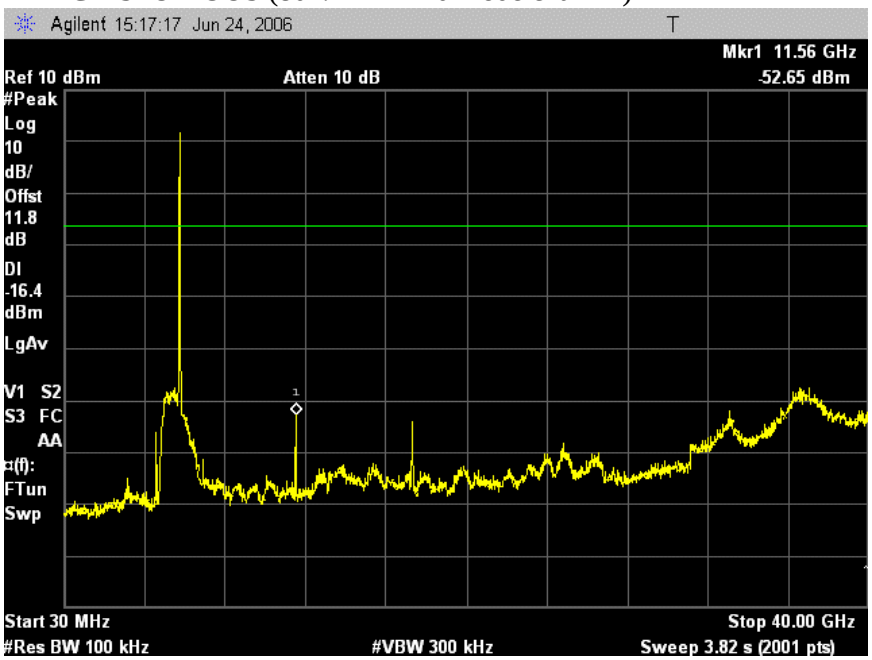

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11n HT20 mode chain B)

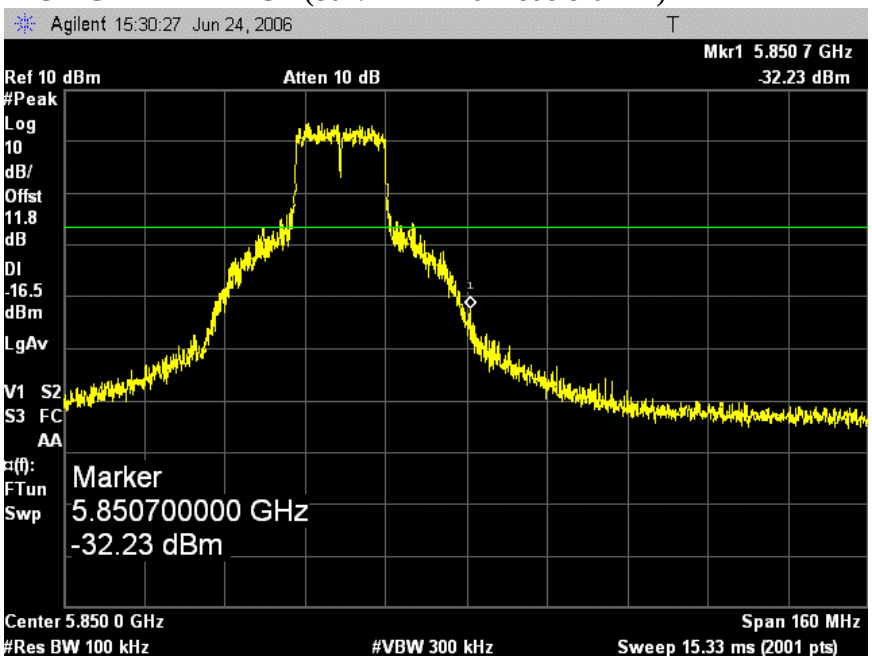

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11n HT20 mode chain B)

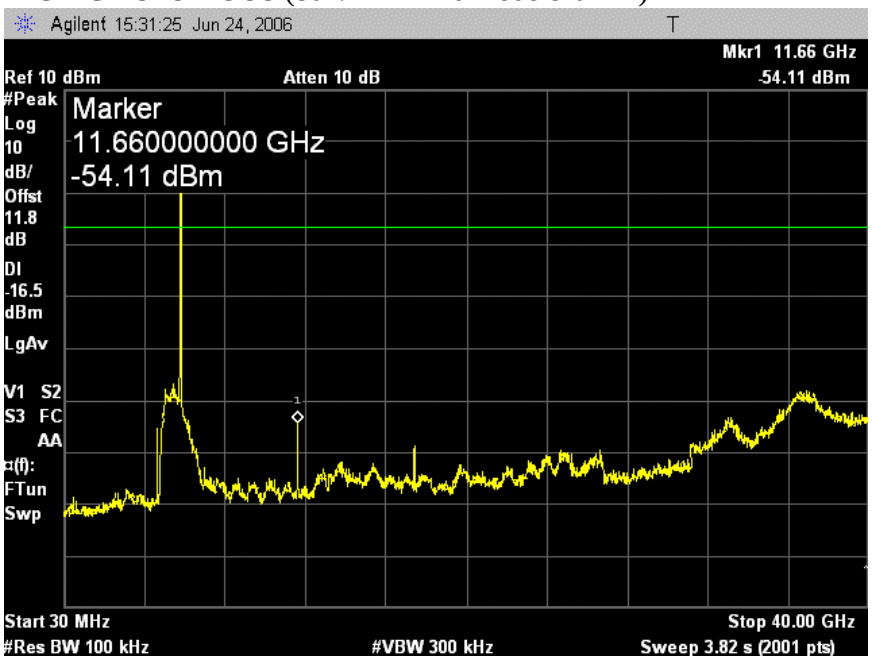

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN A)

LOW CH BANDEDGE (802.11n HT40 mode chain A)

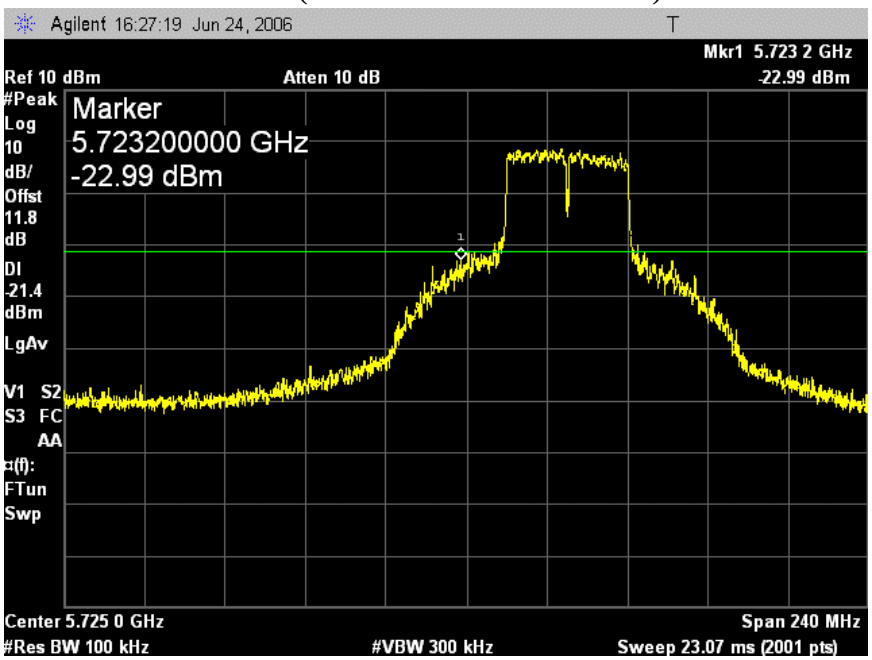

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11n HT40 mode chain A)

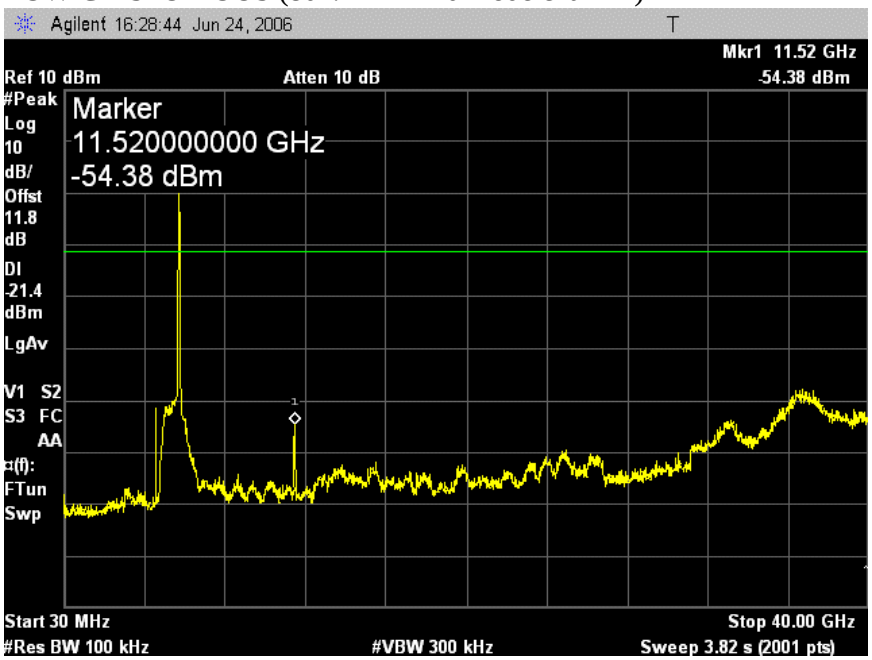

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11n HT40 mode chain A)

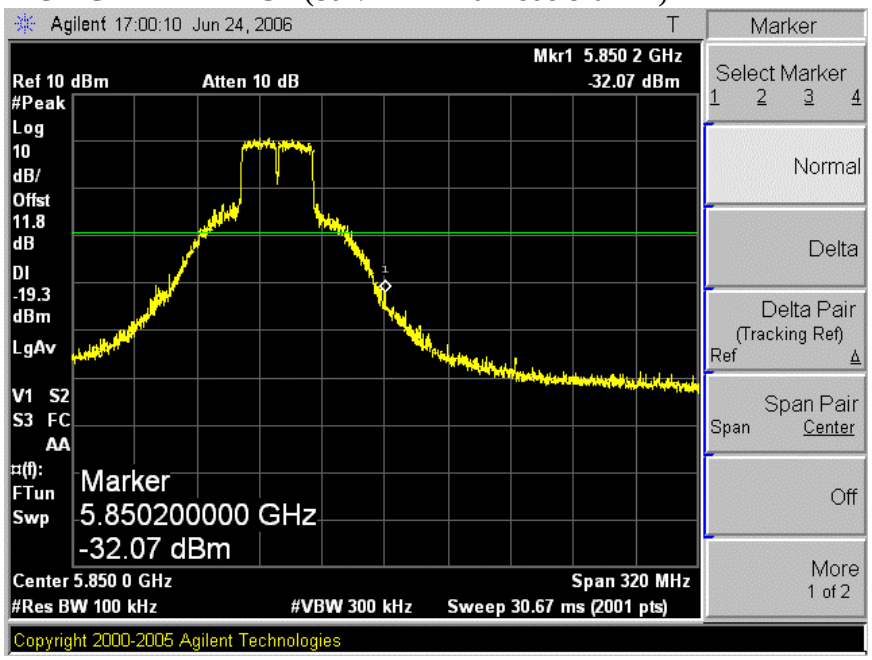

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11n HT40 mode chain A)

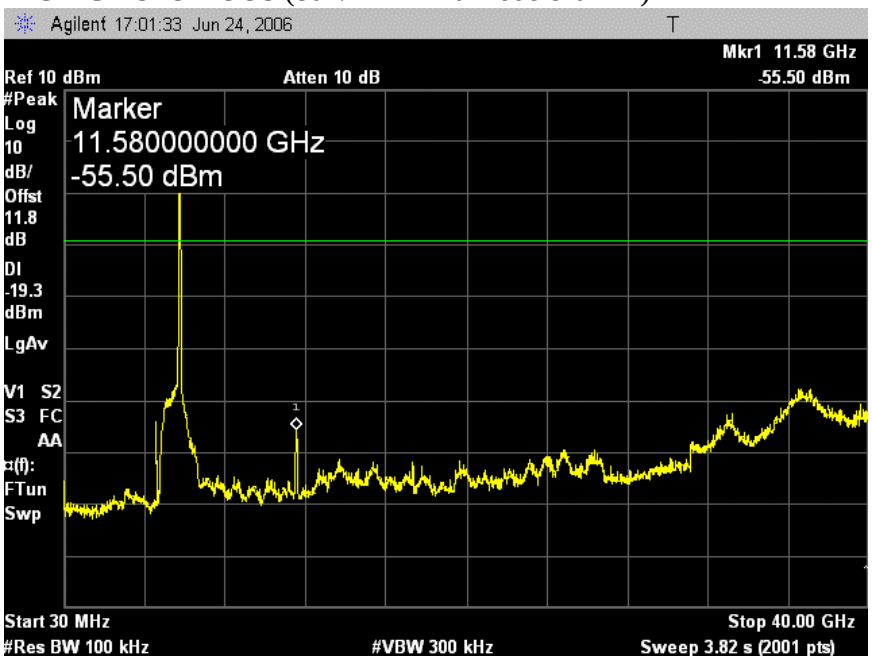

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN B)

LOW CH BANDEDGE (802.11n HT40 mode chain B)

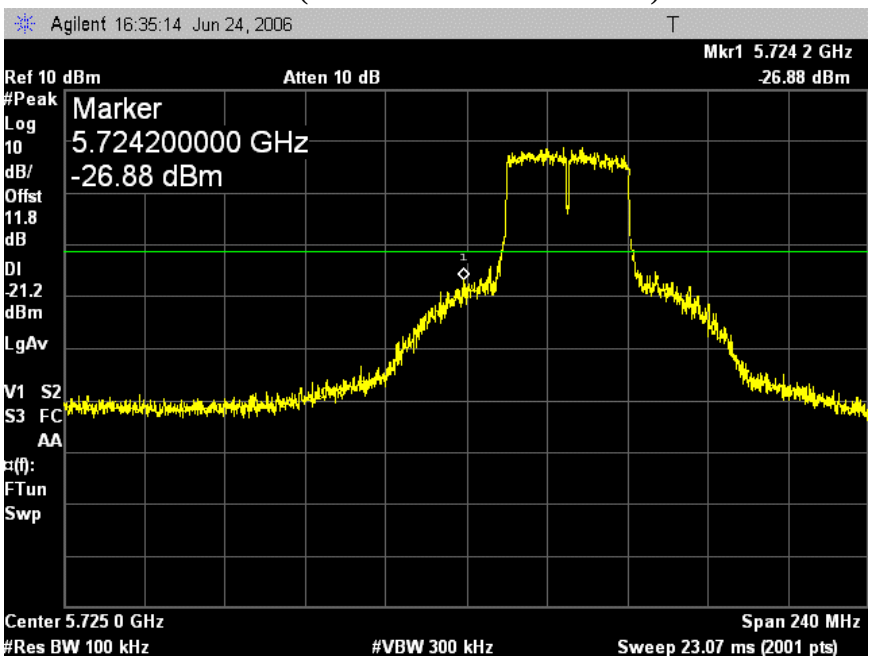

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11n HT40 mode chain B)

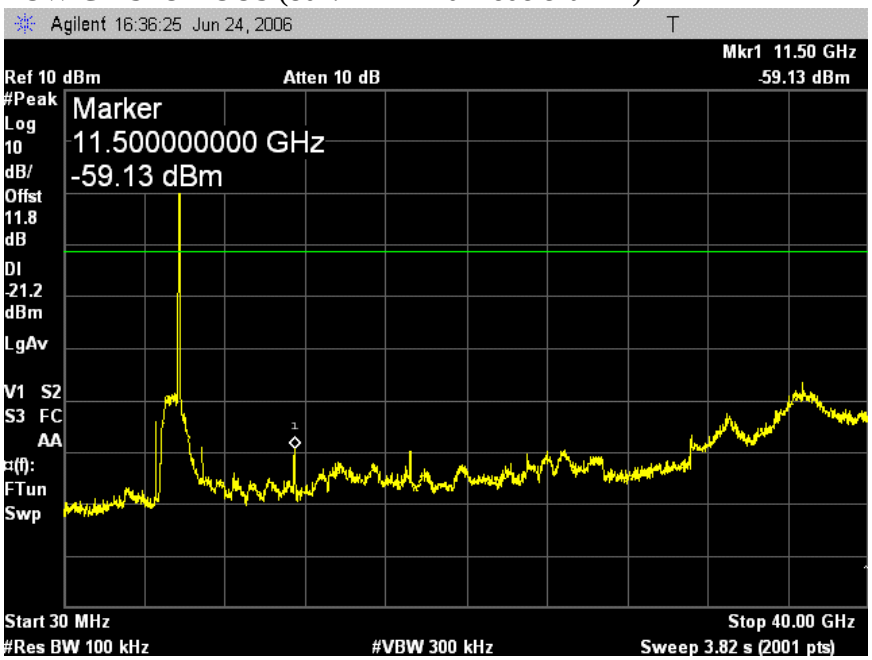

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11n HT40 mode chain B)

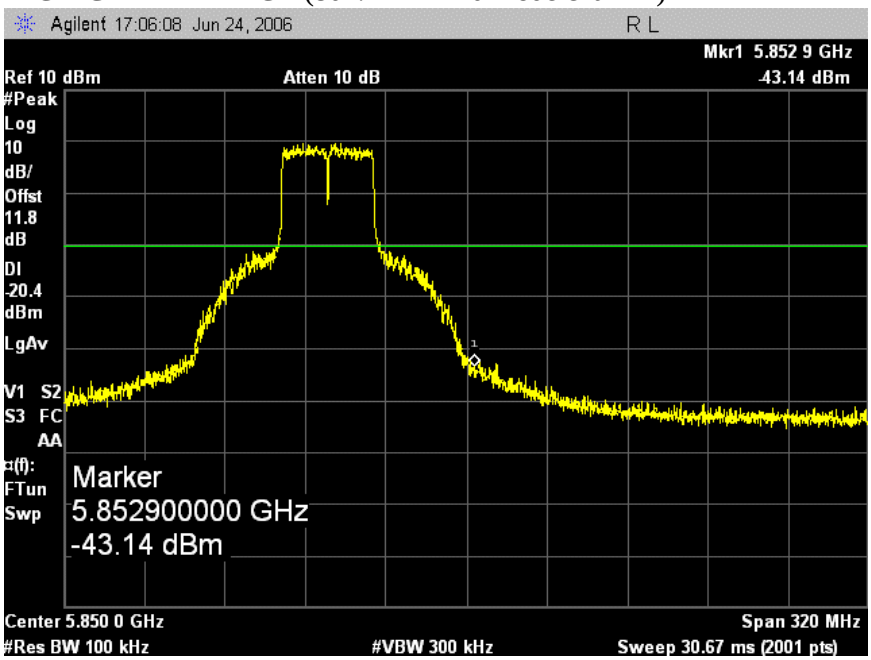

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11n HT40 mode chain B)

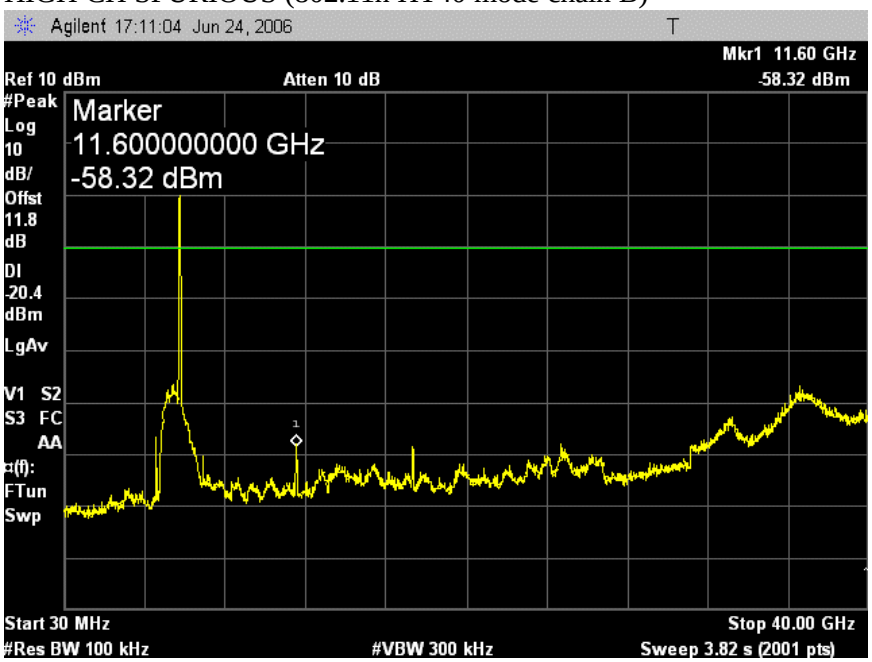

This report shall not be reproduced except in full, without the written approval of CCS.

COMBINED SPURIOUS EMISSIONS (802.11a 20M MODE)

LOW CH BANDEDGE (802.11a 20M mode Combined)

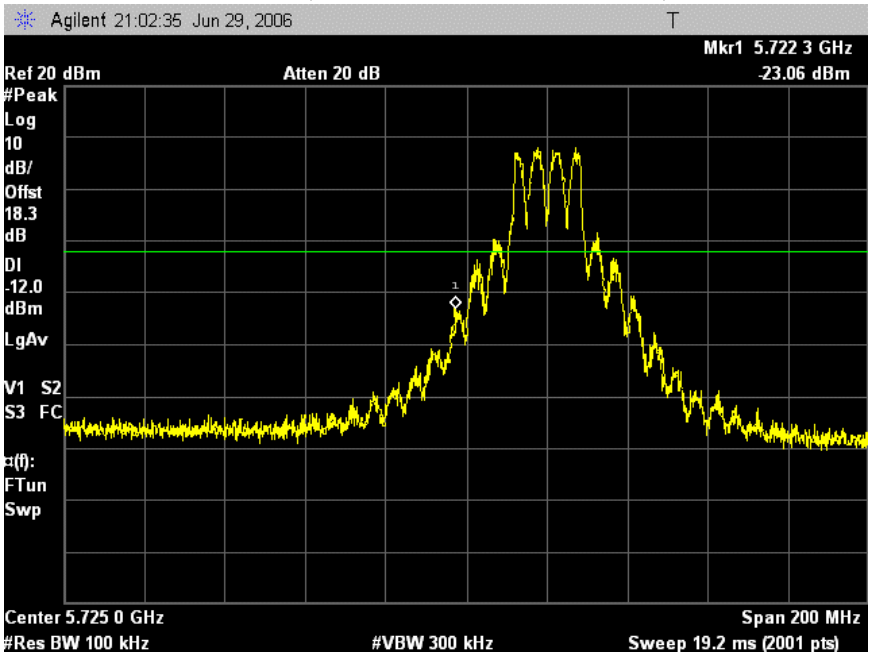

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11a 20M mode Combined)

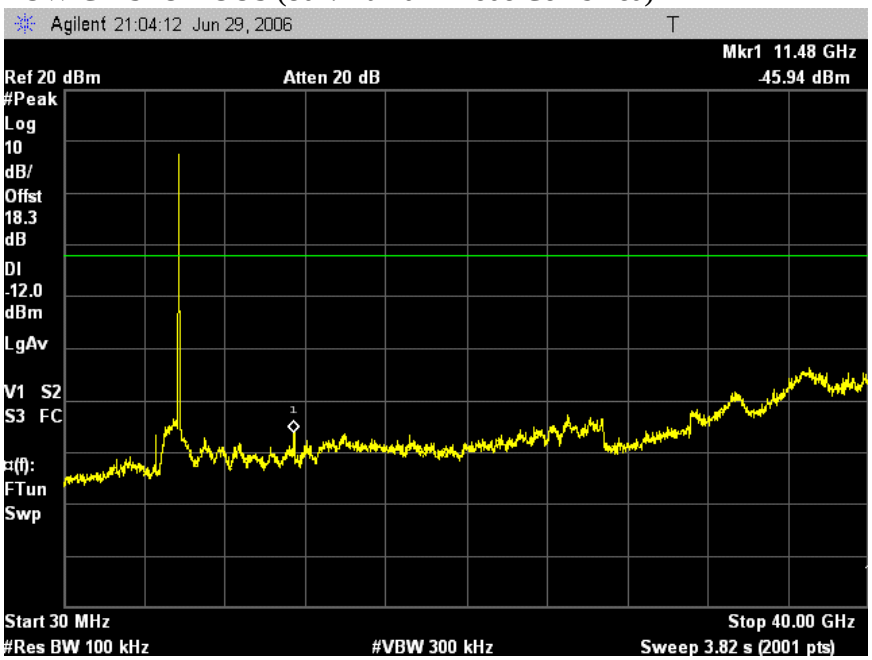

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH REFERENCE (802.11a 20M mode Combined)

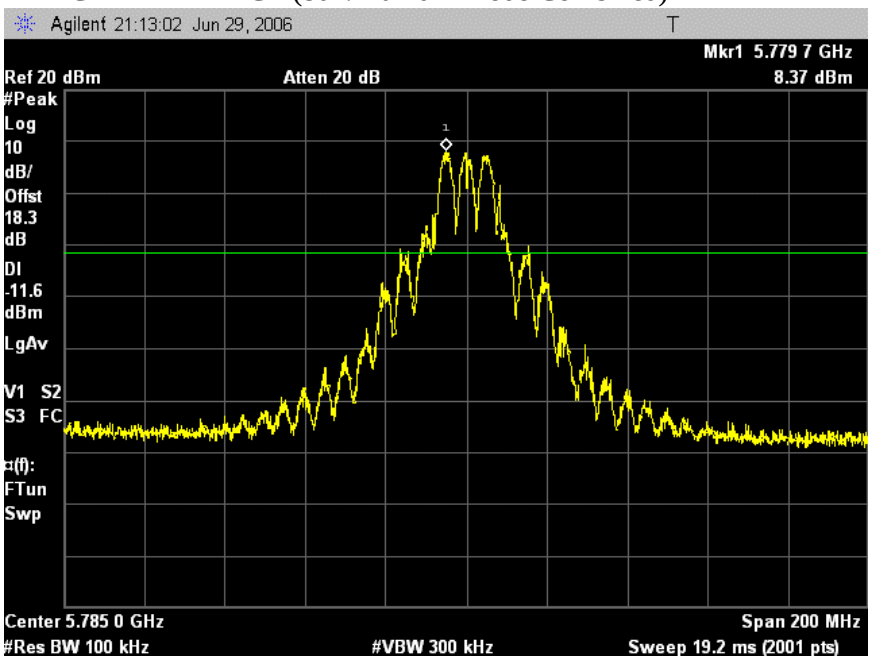

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11a 20M mode Combined)

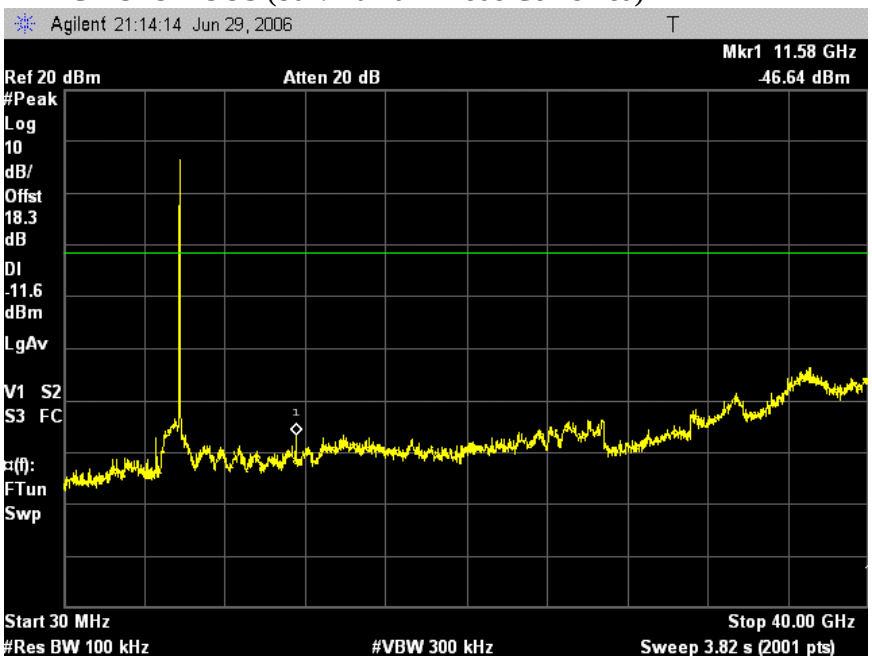

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11a 20M mode Combined)

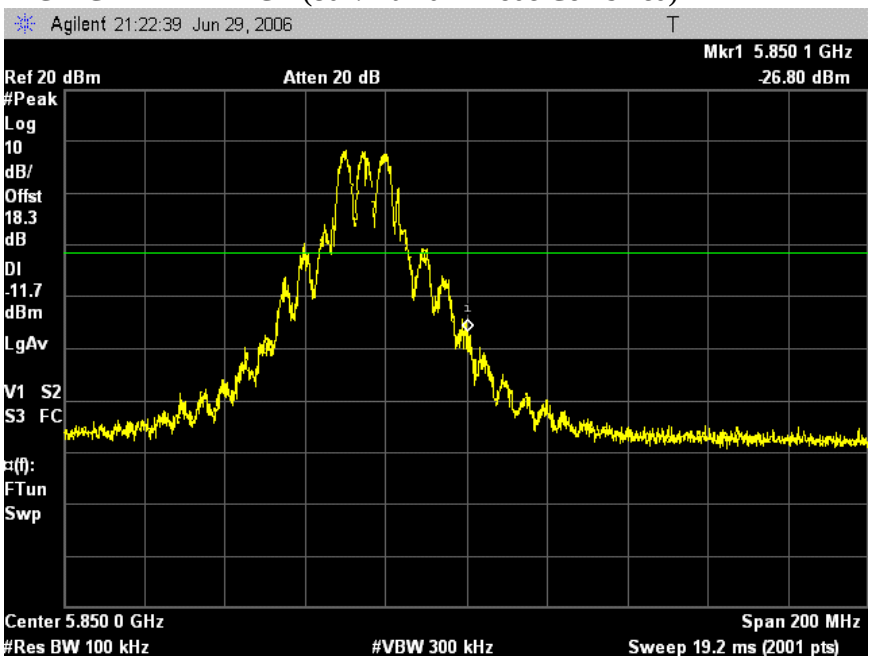

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11a 20M mode Combined)

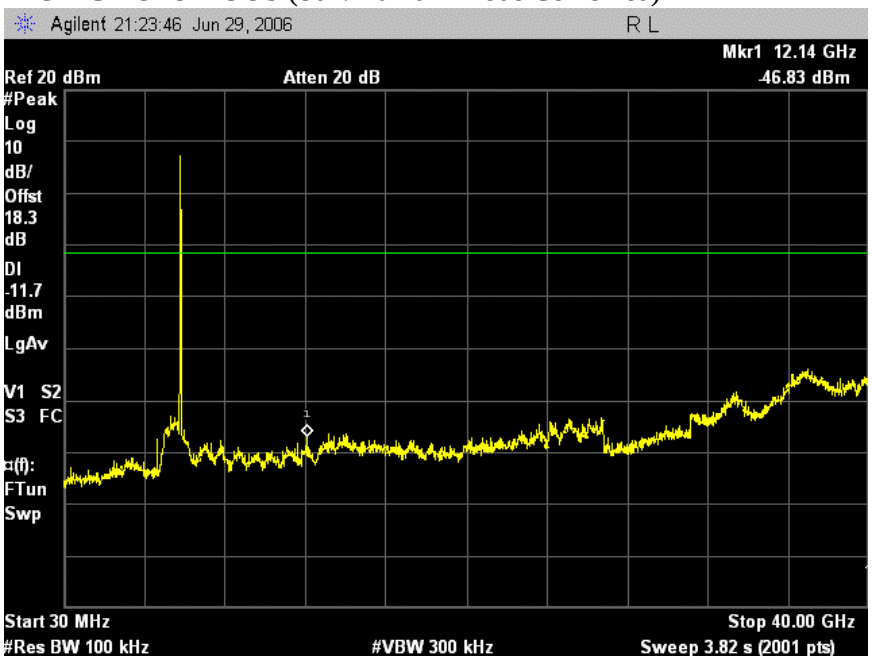

This report shall not be reproduced except in full, without the written approval of CCS.

COMBINED SPURIOUS EMISSIONS (802.11a 40M MODE)

LOW CH BANDEDGE (802.11a 40M mode Combined)

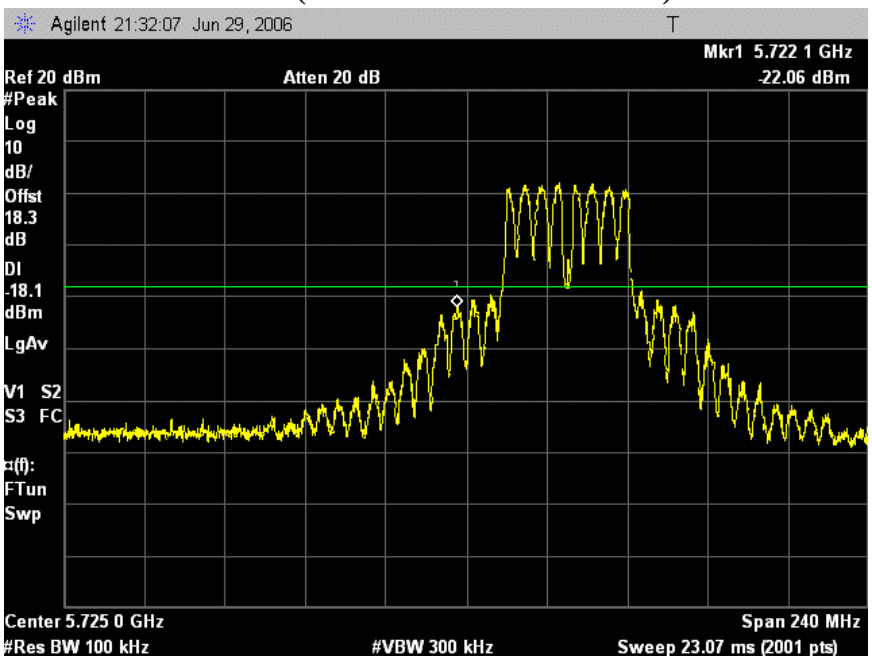

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11a 40M mode Combined)

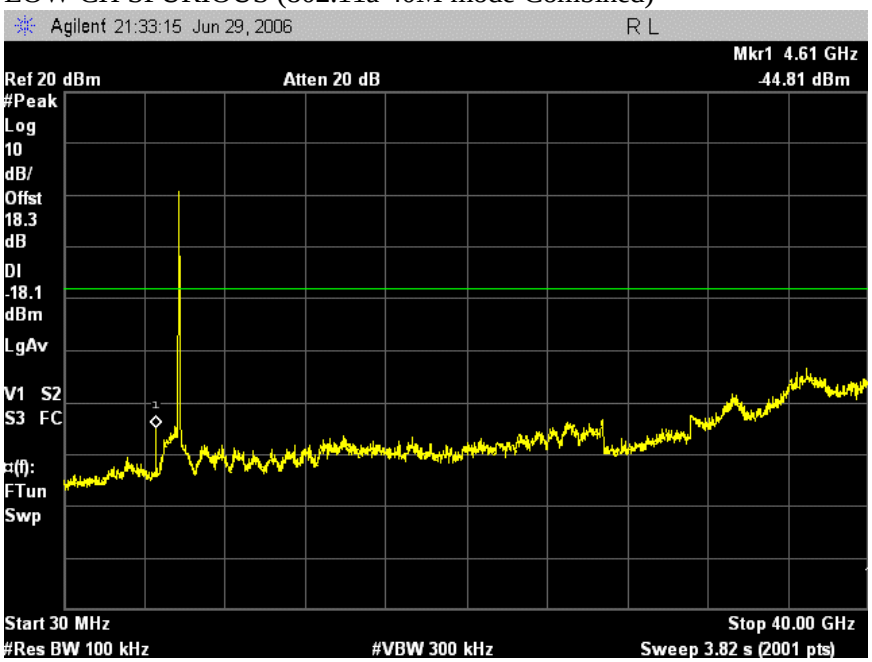

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11a 40M mode Combined)

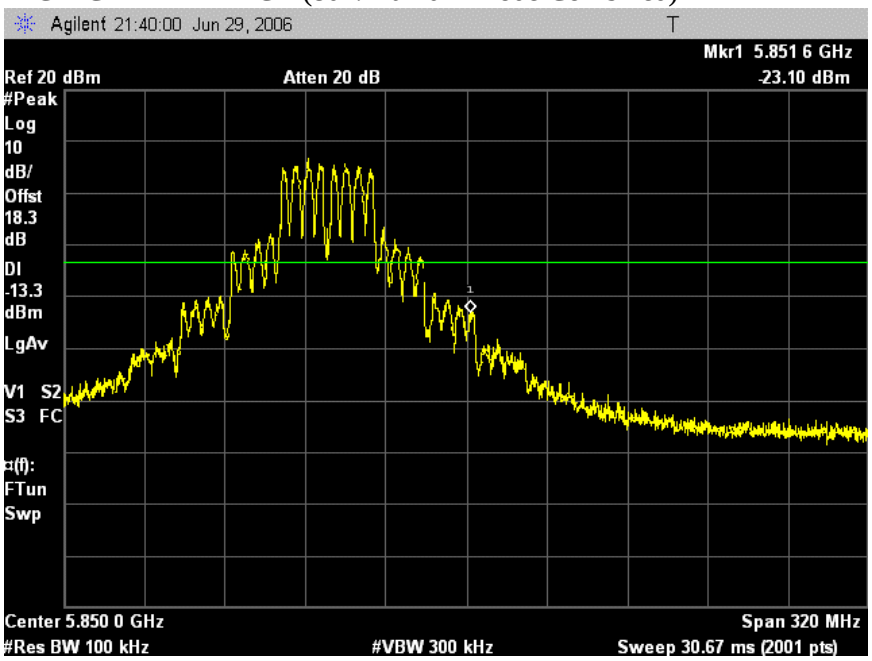

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11a 40M mode Combined)

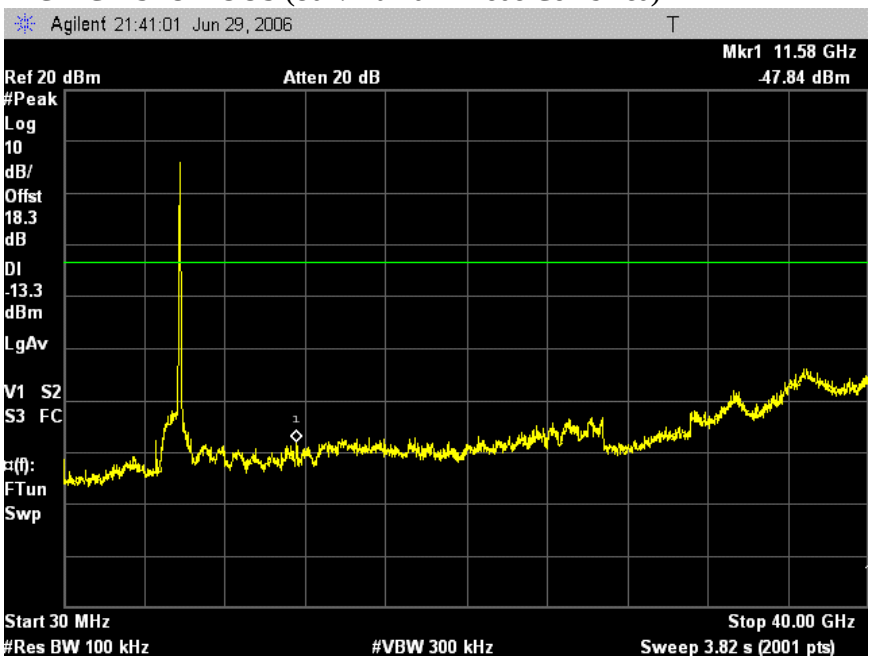

This report shall not be reproduced except in full, without the written approval of CCS.

COMBINED SPURIOUS EMISSIONS (802.11n HT20 MODE)

LOW CH BANDEDGE (802.11n HT20 mode Combined)

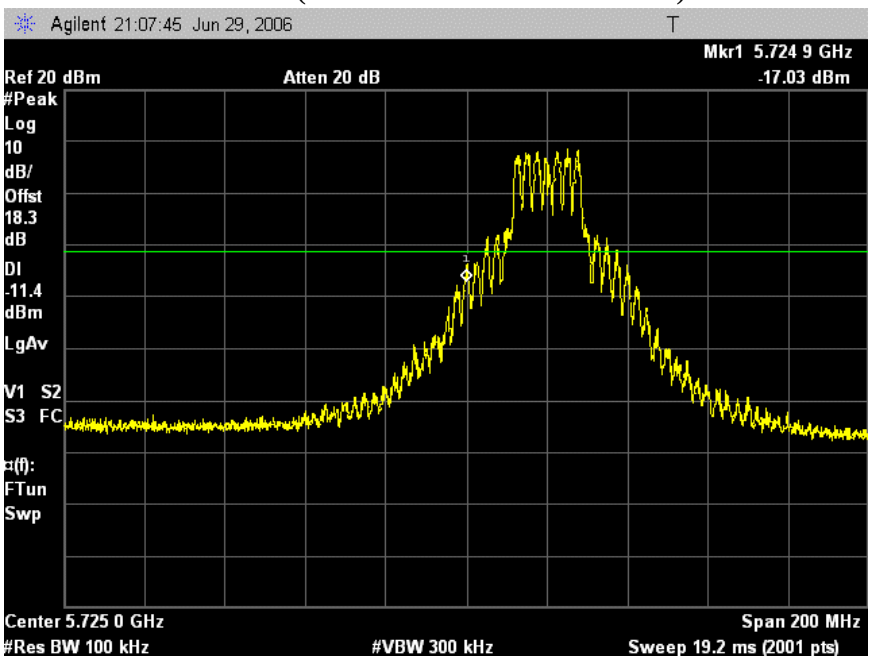

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11n HT20 mode Combined)

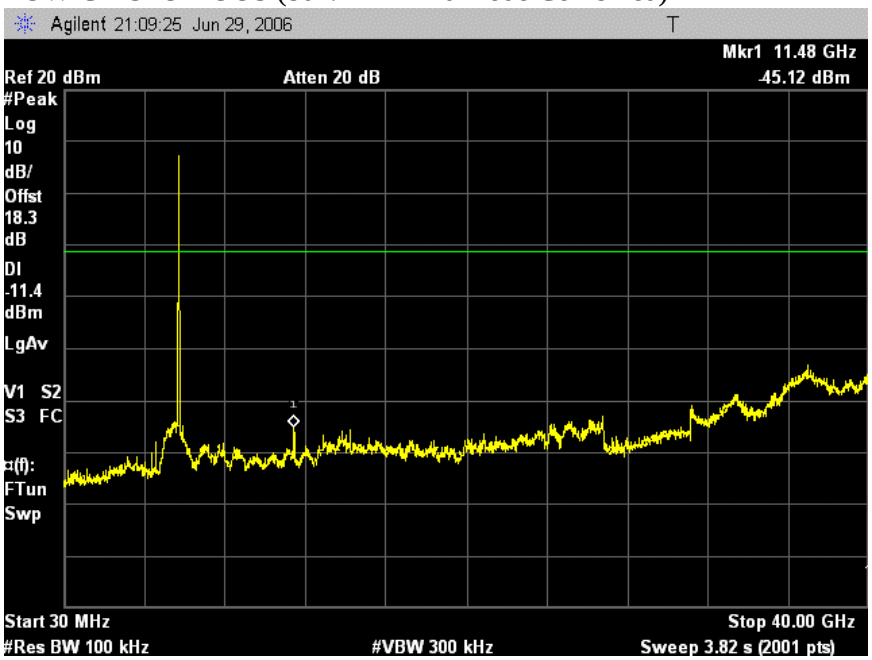

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH REFERENCE (802.11n HT20 mode Combined)

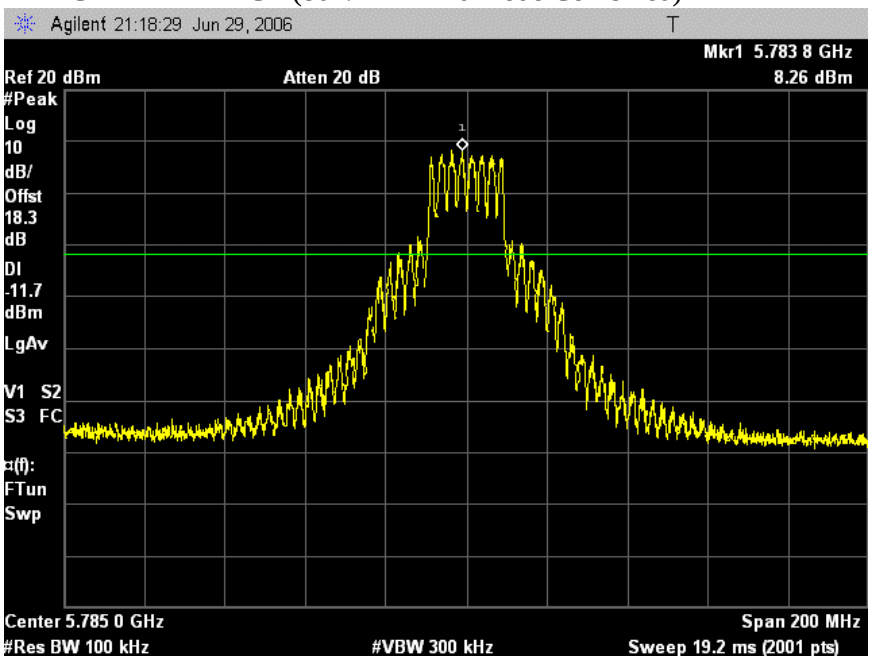

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11n HT20 mode Combined)

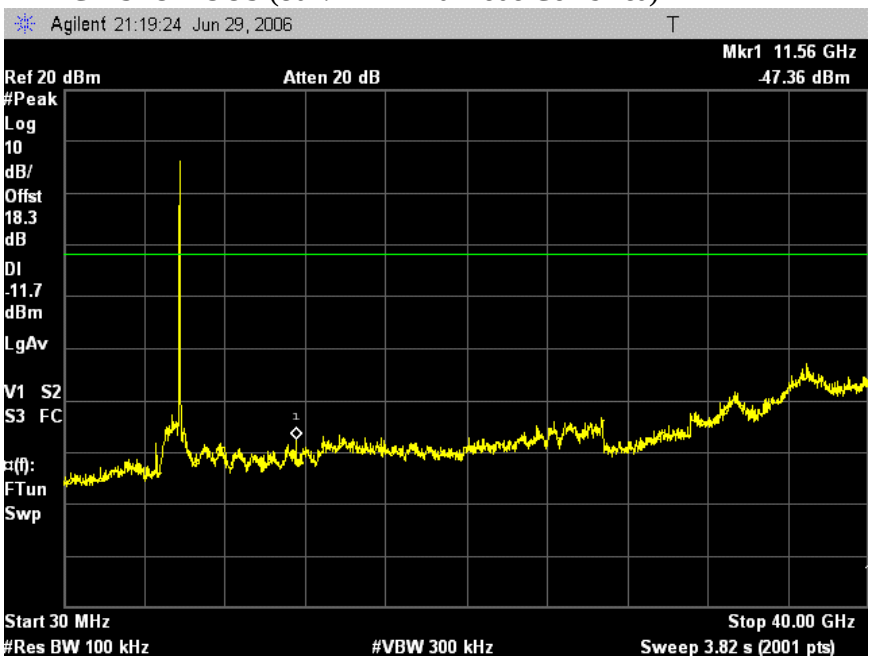

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11n HT20 mode Combined)

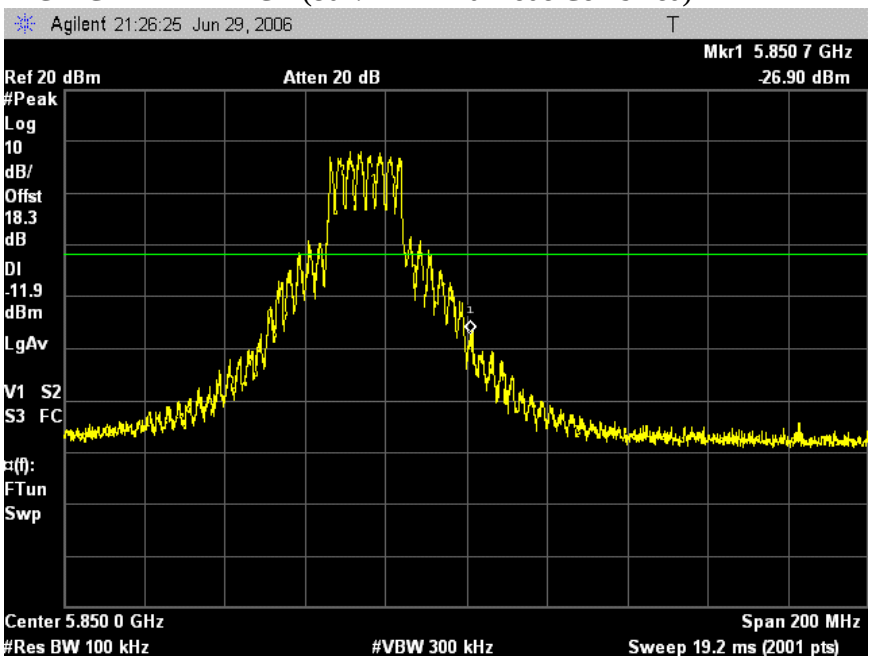

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11n HT20 mode Combined)

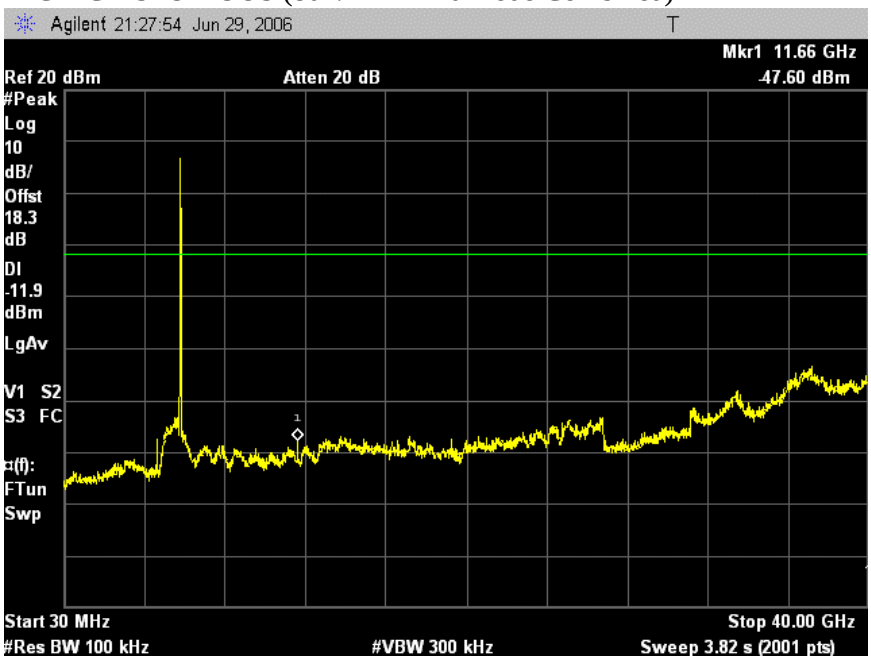

This report shall not be reproduced except in full, without the written approval of CCS.

COMBINED SPURIOUS EMISSIONS (802.11 HT40 MODE)

LOW CH BANDEDGE (802.11n HT40 mode Combined)

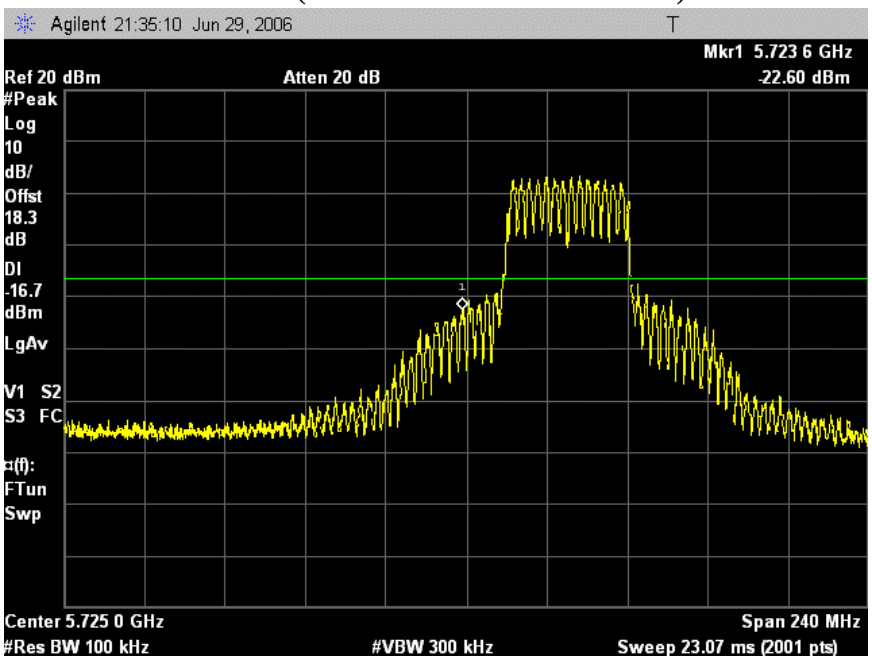

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11n HT40 mode Combined)

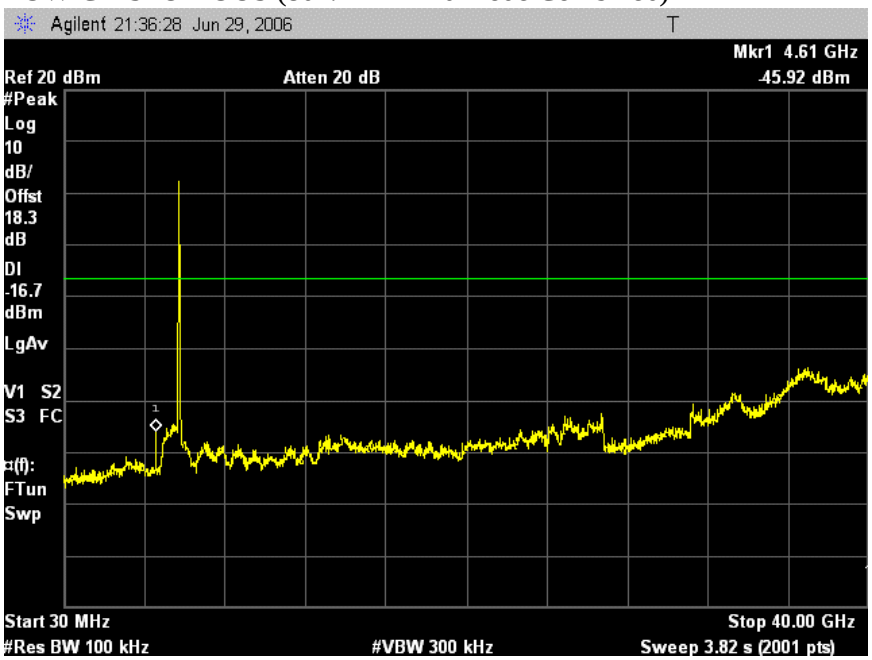

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH BANDEDGE (802.11n HT40 mode Combined)

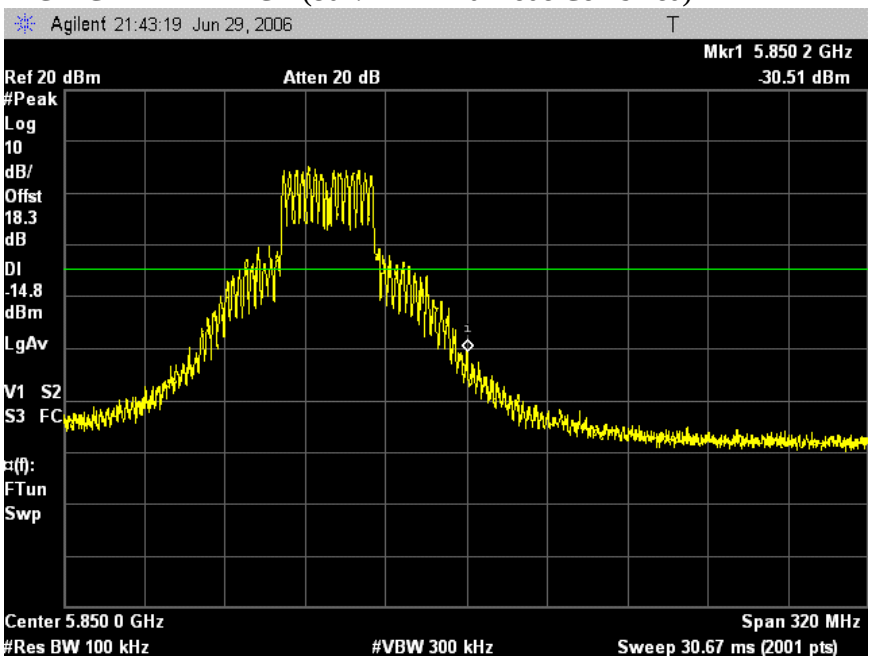

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11n HT40 mode Combined)

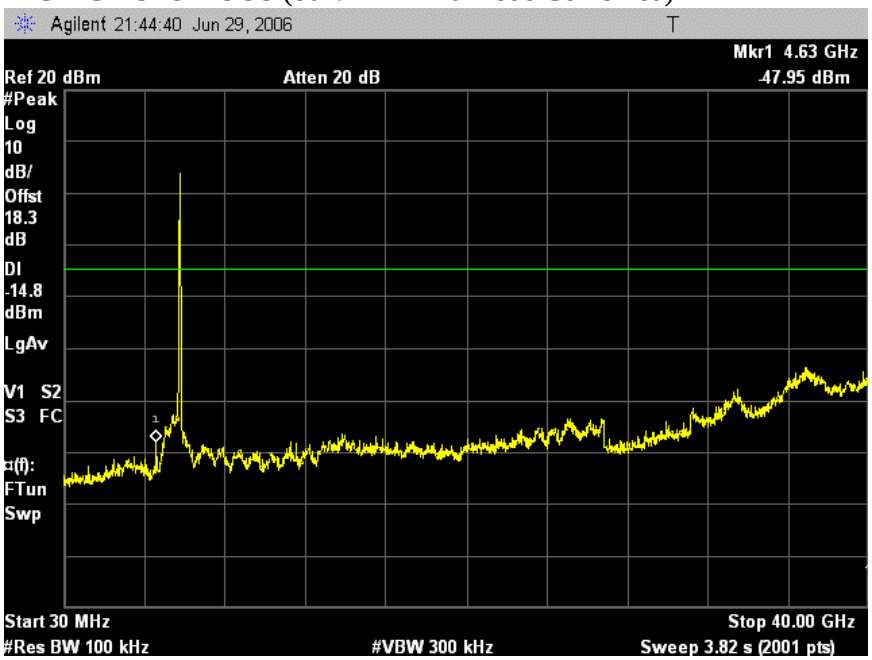

This report shall not be reproduced except in full, without the written approval of CCS.

7.2.7. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz
* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

This report shall not be reproduced except in full, without the written approval of CCS.

CALCULATIONS

Given

$E = \sqrt{(30 * P * G)} / d$

and

$S = E \wedge 2 / 3770$

where

E = Field Strength in Volts/meter
P = Power in Watts
G = Numeric antenna gain
d = Distance in meters
S = Power Density in milliwatts/square centimeter

Combining equations yields:

$S = (30 * P * G) / (3770 * (d \wedge 2))$

Changing to units of Power to mW and Distance to cm, using:

P (W) = P (mW) / 1000 and
d (m) = d (cm) / 100

and substituting the logarithmic form of power and gain using:

P (mW) = 10 ^ (P (dBm) / 10) and
G (numeric) = 10 ^ (G (dBi) / 10)

yields

$S = 0.0795 * 10 \wedge ((P + G) / 10) / (d^2)$

where

d = MPE distance in cm
P = Power in dBm
G = Antenna Gain in dBi
S = Power Density Limit in mW/cm^2

This report shall not be reproduced except in full, without the written approval of CCS.

LIMITS

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm^2

RESULTS

No non-compliance noted:

Band (MHz)	Power Density Limit (mW/cm^2)	Total Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
5725 to 5850	1.0	25.76	4.40	9.08

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

This report shall not be reproduced except in full, without the written approval of CCS.

7.3. RADIATED EMISSIONS

7.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1]0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41			

[1] Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
[2] Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

This report shall not be reproduced except in full, without the written approval of CCS.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

This report shall not be reproduced except in full, without the written approval of CCS.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

This report shall not be reproduced except in full, without the written approval of CCS.

7.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

RESTRICTED BANDEDGE (802.11b MODE, LOW CHANNEL)

1) **FOXCONN ANTENNA**

LOW CHANNEL PEAK (802.11b mode, Horizontal)

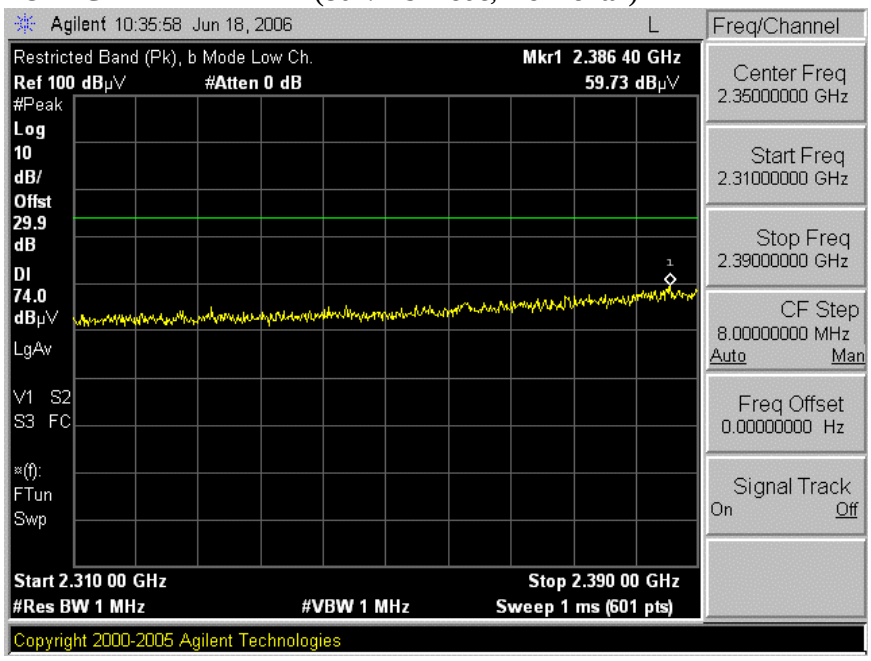

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11b mode, Horizontal)

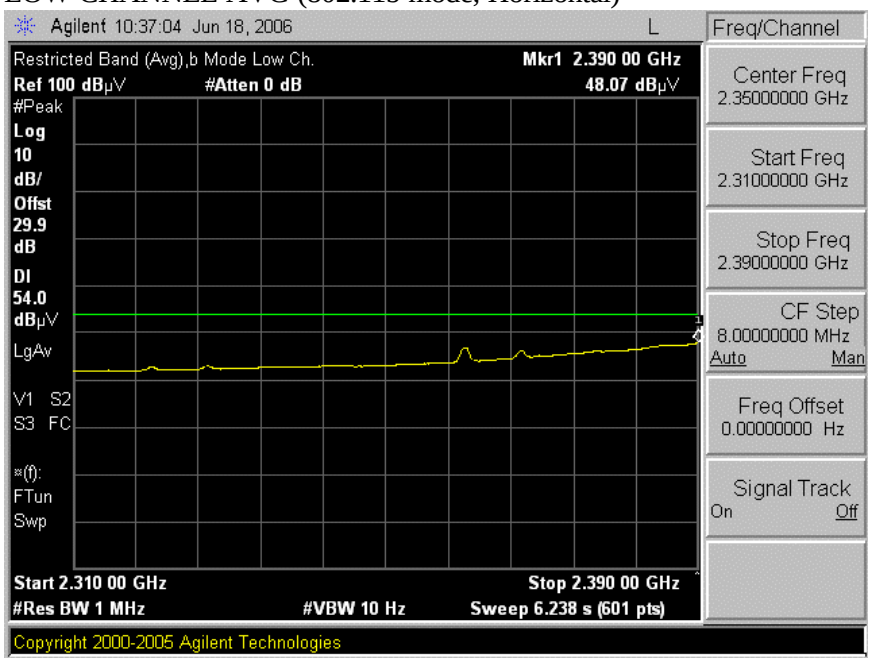

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11b mode, Vertical)

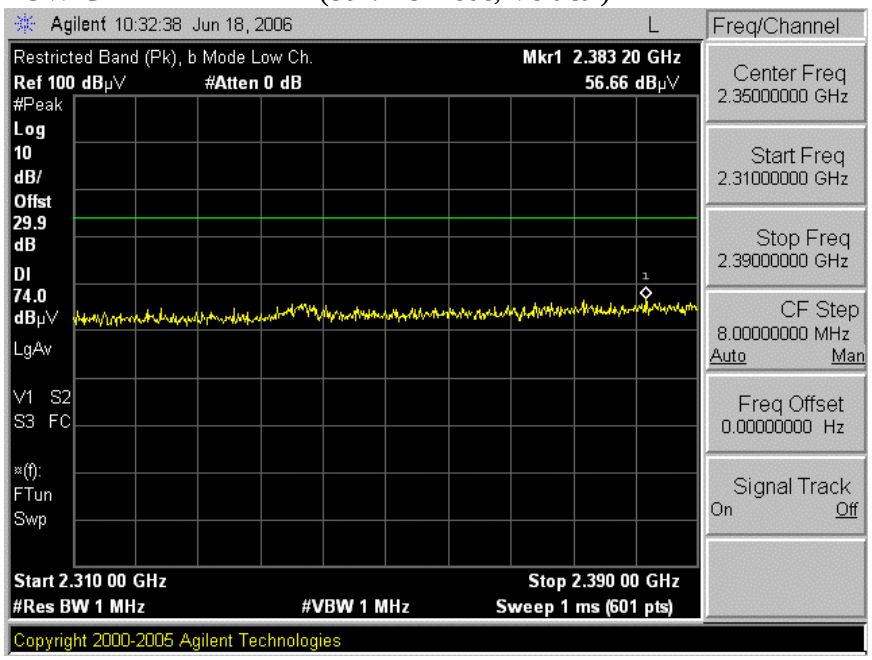

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11b mode, Vertical)

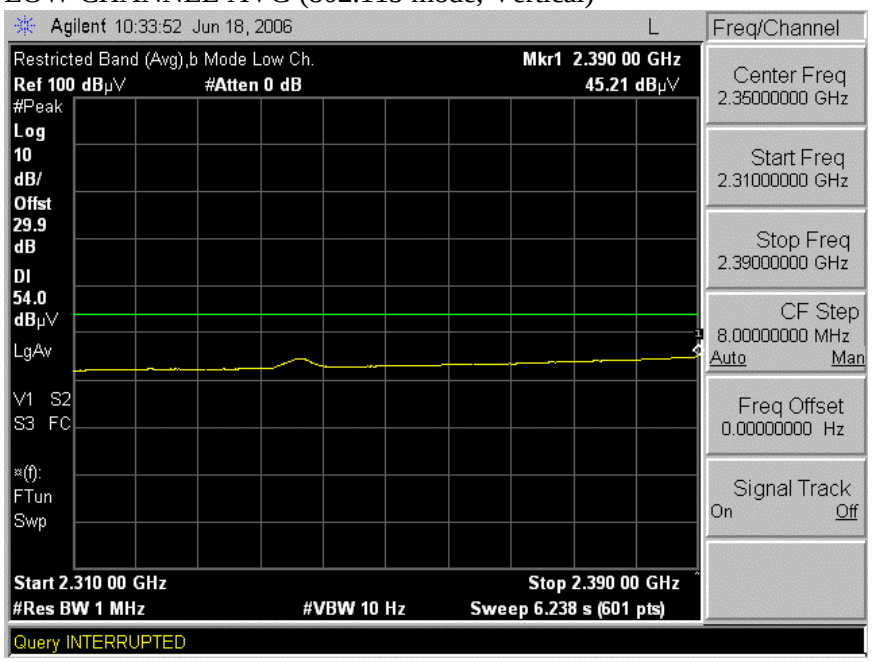

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11b MODE, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11b mode, Horizontal)

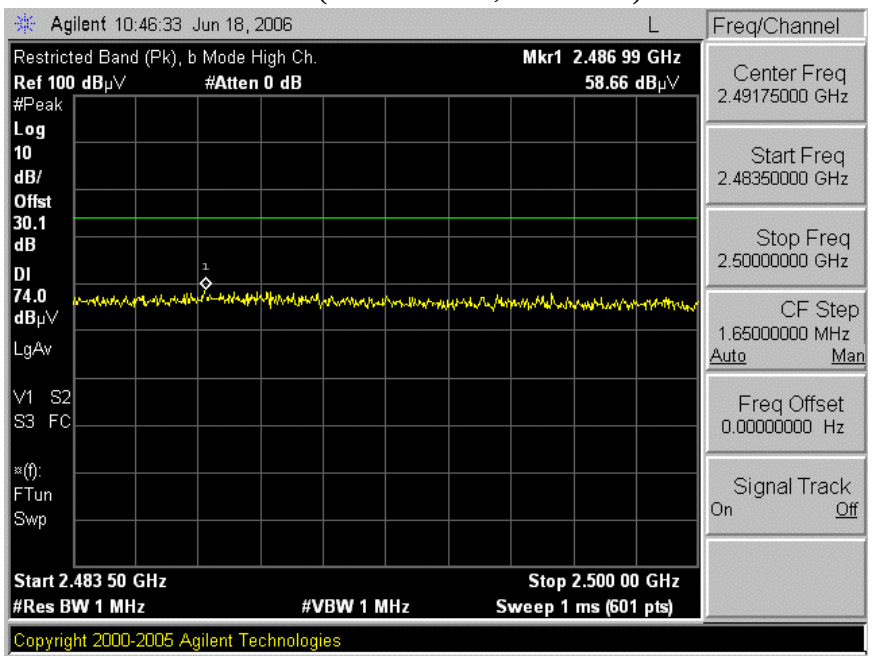

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11b mode, Horizontal)

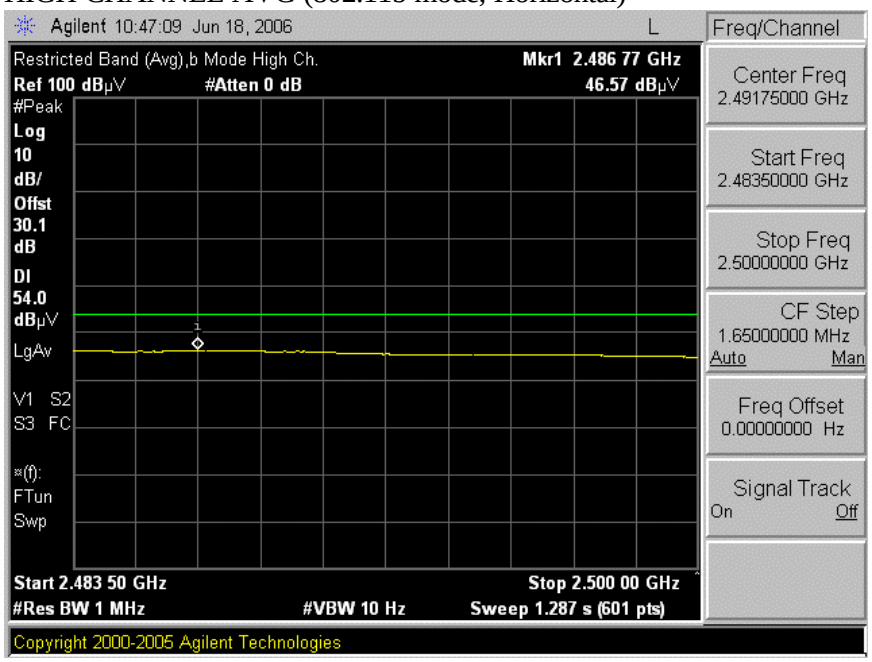

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11b mode, Vertical)

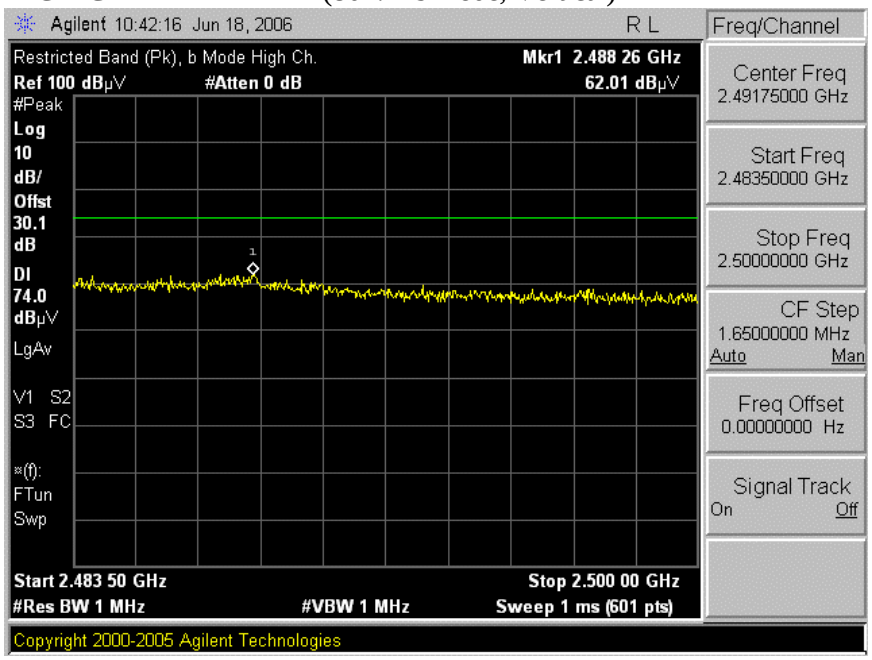

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11b mode, Vertical)

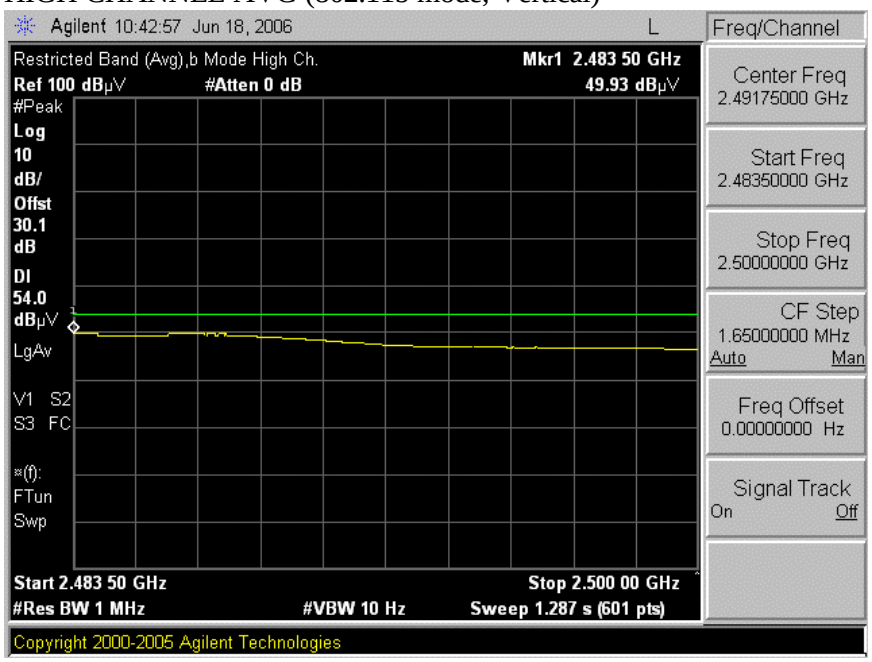

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date:06/17/2006
Test Engineer: THANH NGUYEN
Configuration:EUT , Extender card, Support Laptop.
Mode: Continously Transmitting b mode/ wth Foxconn antenna.

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	T144 Miteq 3008A00931		

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
Thanh 177079008		Thanh 208946003	HPF_4.0GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Tx Ch 1															
4.824	3.0	52.80	40.83	33.3	2.8	-36.5	0.0	0.6	53.0	41.0	74	54	-21.0	-13.0	V
7.236	3.0	47.43	37.35	34.9	3.3	-36.2	0.0	0.6	50.1	40.0	74	54	-23.9	-14.0	V
9.648	3.0	44.24	35.60	36.7	3.7	-37.0	0.0	0.8	48.5	39.9	74	54	-25.5	-14.1	Noise floor
4.824	3.0	55.30	42.55	33.3	2.8	-36.5	0.0	0.6	55.5	42.8	74	54	-18.5	-11.2	H
7.236	3.0	45.45	35.51	34.9	3.3	-36.2	0.0	0.6	48.1	38.2	74	54	-25.9	-15.8	H
9.648	3.0	42.83	31.20	36.7	3.7	-37.0	0.0	0.8	47.1	35.5	74	54	-26.9	-18.5	Noise floor
Tx Ch 6															
4.874	3.0	53.25	40.69	33.4	2.8	-36.5	0.0	0.6	53.5	41.0	74	54	-20.5	-13.0	V
7.311	3.0	52.64	40.02	35.0	3.3	-36.2	0.0	0.6	55.4	42.8	74	54	-18.6	-11.2	V
9.784	3.0	42.78	33.98	36.8	3.7	-37.0	0.0	0.8	47.1	38.3	74	54	-26.9	-15.7	V
12.185	3.0	41.71	31.11	37.6	4.3	-35.4	0.0	0.9	49.2	38.6	74	54	-24.8	-15.4	Noise floor
4.874	3.0	50.27	34.95	33.4	2.8	-36.5	0.0	0.6	50.6	35.2	74	54	-23.4	-18.8	H
7.311	3.0	45.02	33.25	35.0	3.3	-36.2	0.0	0.6	47.8	36.0	74	54	-26.2	-18.0	H
9.784	3.0	50.26	43.20	36.8	3.7	-37.0	0.0	0.8	54.6	47.5	74	54	-19.4	-6.5	H
12.185	3.0	42.75	32.40	37.6	4.3	-35.4	0.0	0.9	50.2	39.9	74	54	-23.8	-14.1	Noise floor
Tx Ch11															
4.924	3.0	51.19	39.44	33.4	2.8	-36.5	0.0	0.6	51.6	39.8	74	54	-22.4	-14.2	V
7.386	3.0	53.14	42.42	35.0	3.3	-36.2	0.0	0.6	55.9	45.2	74	54	-18.1	-8.8	V
9.848	3.0	43.10	31.33	36.8	3.7	-37.0	0.0	0.8	47.4	35.7	74	54	-26.6	-18.3	Noise floor
4.924	3.0	45.44	33.54	33.4	2.8	-36.5	0.0	0.6	45.8	33.9	74	54	-28.2	-20.1	H
7.386	3.0	45.01	32.10	35.0	3.3	-36.2	0.0	0.6	47.8	34.9	74	54	-26.2	-19.1	H
9.848	3.0	43.88	31.38	36.8	3.7	-37.0	0.0	0.8	48.2	35.7	74	54	-25.8	-18.3	Noise floor
No other emissions were detected above 12GHz															

Rev. 5.1.6

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g 20M MODE, LOW CHANNEL)

LOW CHANNEL PEAK (802.11g 20M mode, Horizontal)

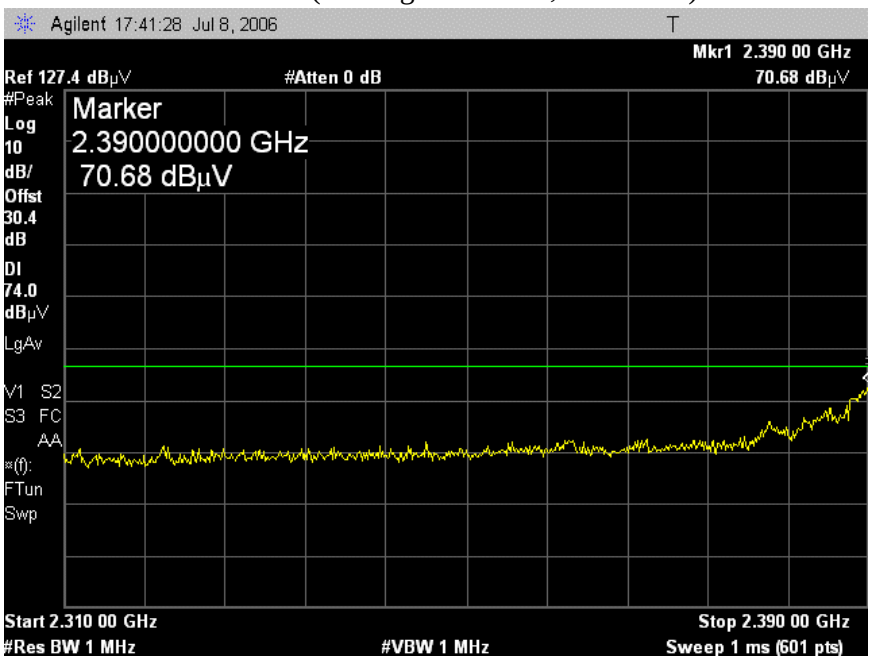

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 20M mode, Horizontal)

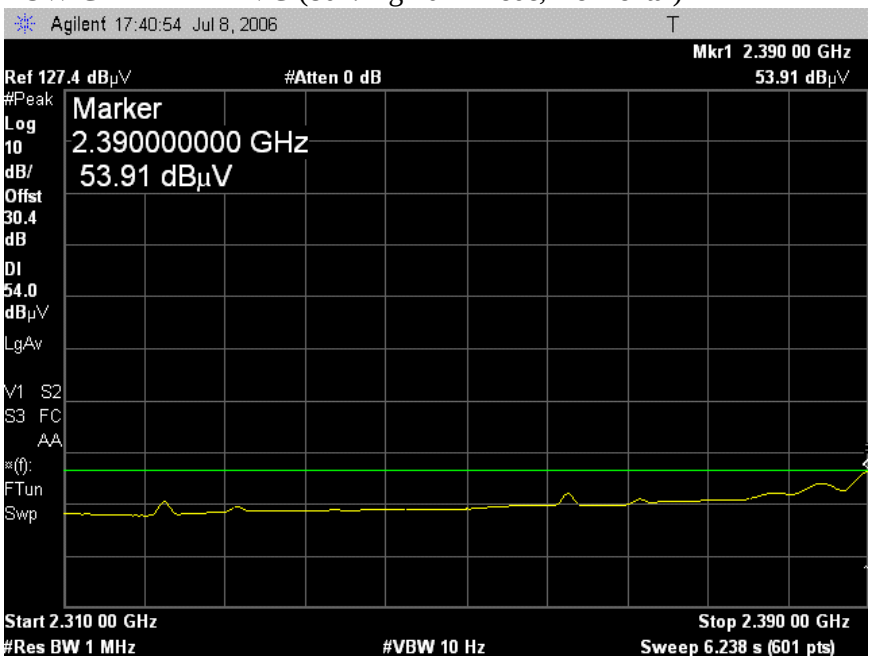

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11g 20M mode, Vertical)

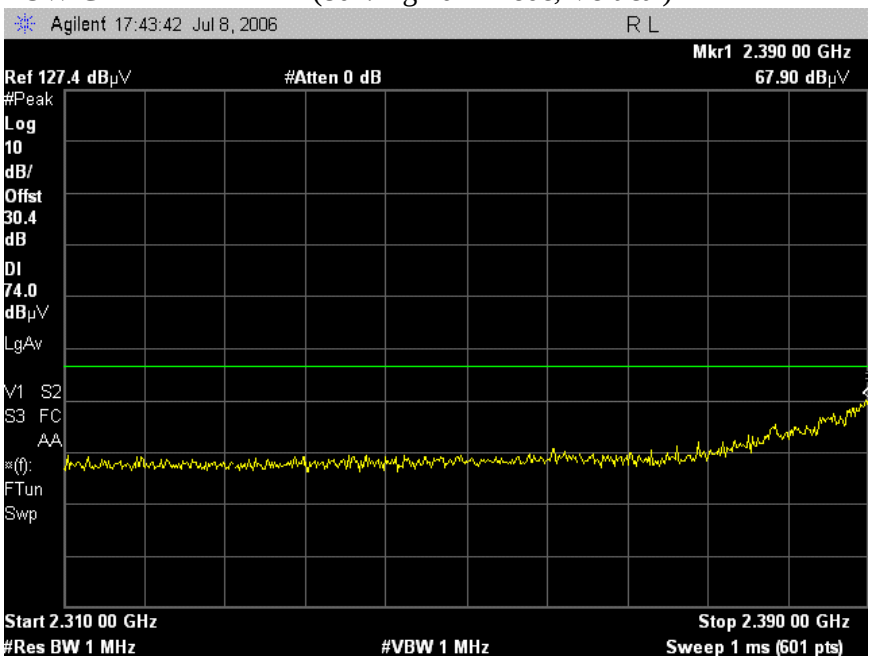

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 20M mode, Vertical)

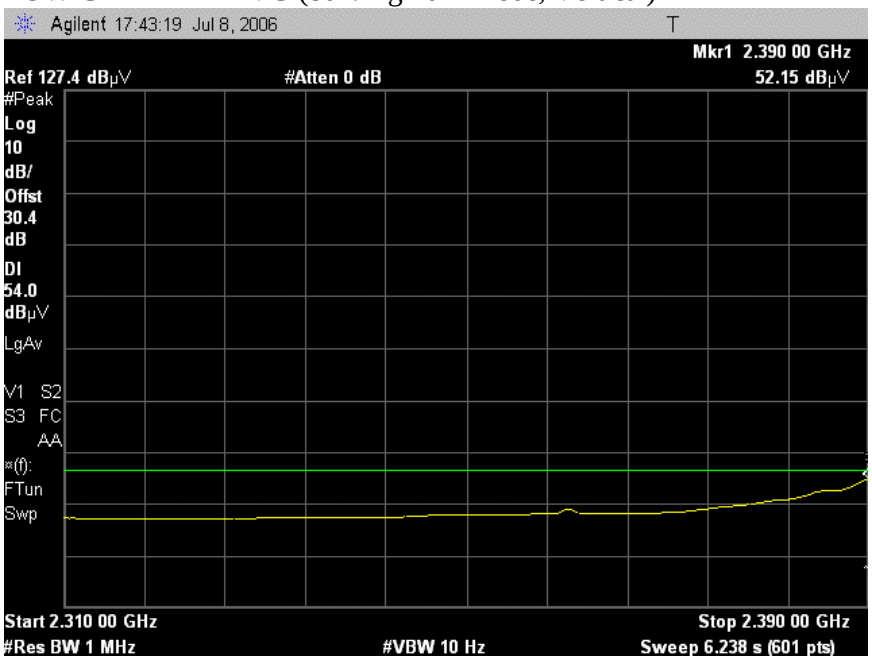

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g 20M MODE, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11g 20M mode, Horizontal)

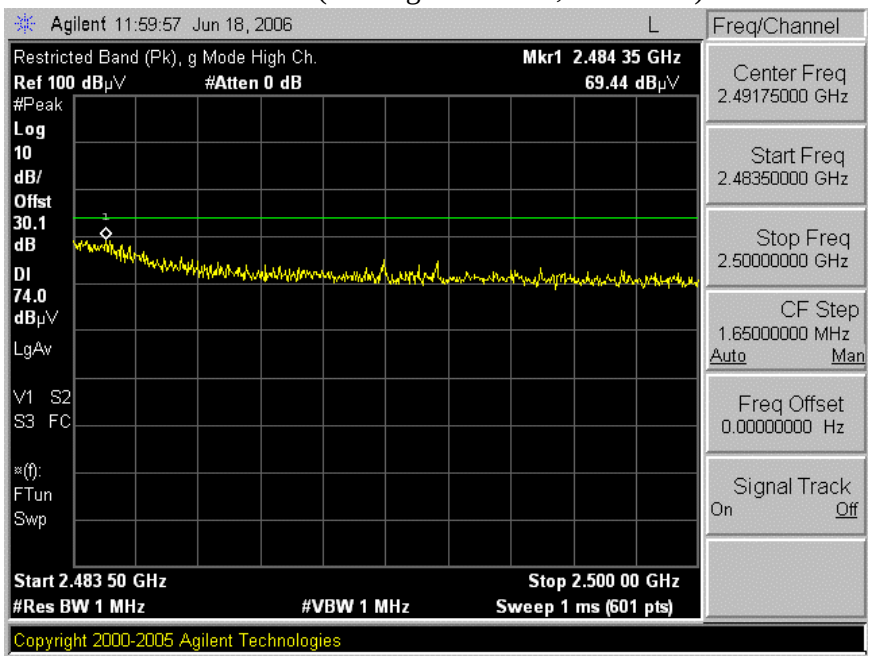

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11g 20M mode, Horizontal)

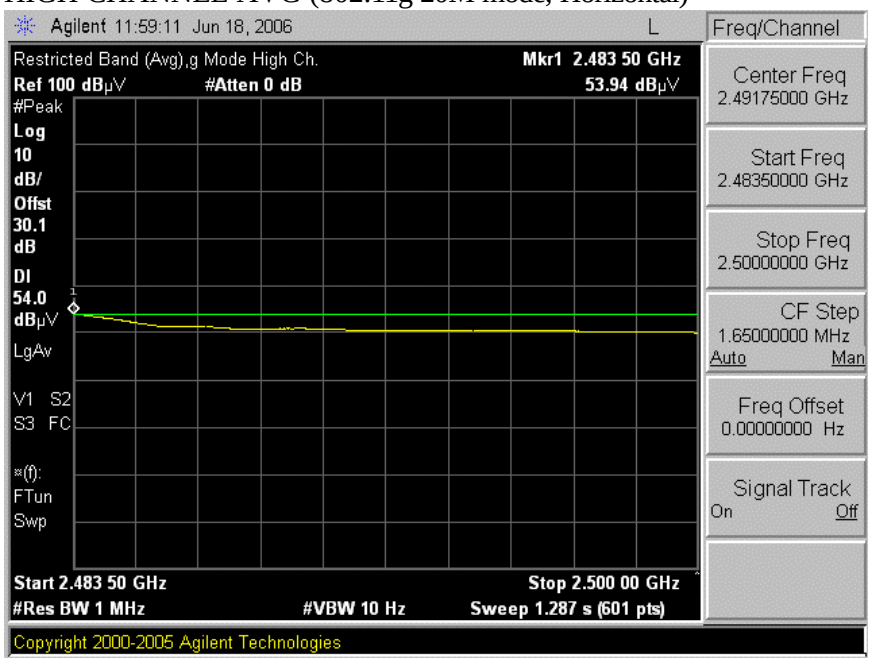

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11g 20M mode, Vertical)

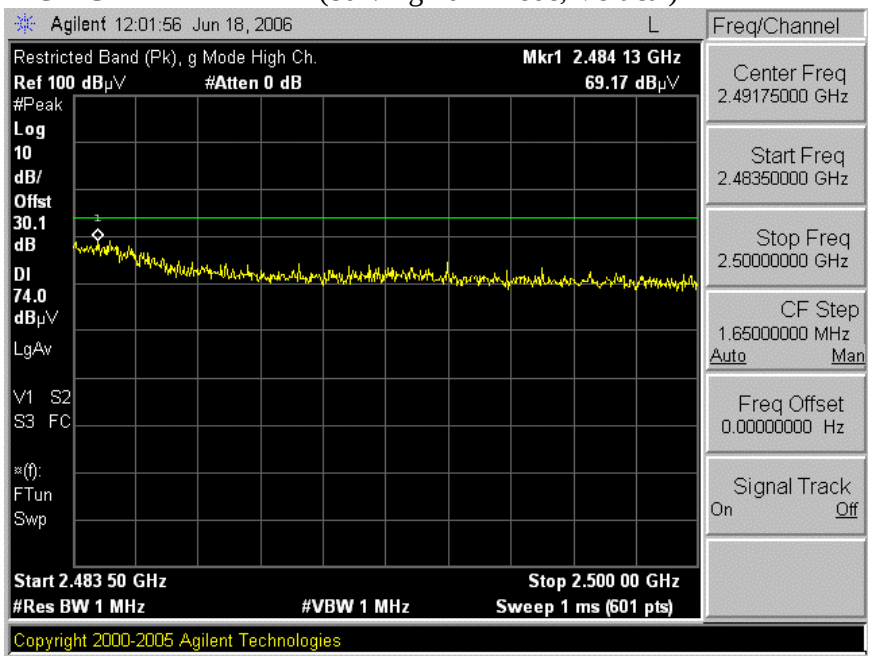

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11g 20M mode, Vertical)

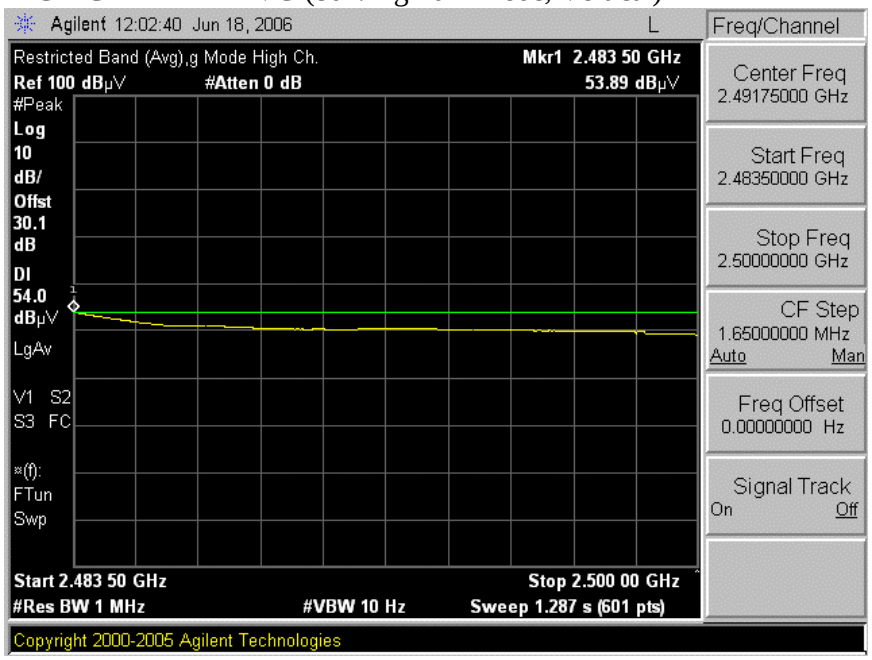

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11g MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/08/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in 11g 20M mode, 54Mbps, w/Foxconn Antenna
EUT S/N: 010

~~Test Equipment~~:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T60; S/N: 2238 @3m	T34 HP 8449B		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001		R_001

~~Peak Measurements~~
RBW=VBW=1MHz
~~Average Measurements~~
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2412 MHz)															
4.824	3.0	47.42	34.52	33.0	4.0	-34.8	0.0	0.0	49.6	36.7	74	54	-24.4	-17.3	V, PowerSetting 63 64
4.824	3.0	50.51	34.23	33.0	4.0	-34.8	0.0	0.0	52.7	36.4	74	54	-21.3	-17.6	H, PowerSetting 63 64
Mid Channel (2437 MHz)															
4.874	3.0	47.80	33.34	33.1	4.0	-34.8	0.0	0.0	50.0	35.6	74	54	-24.0	-18.4	V, PowerSetting 66 66
7.311	3.0	52.06	38.80	35.5	4.6	-34.1	0.0	0.0	58.0	44.8	74	54	-16.0	-9.2	V, PowerSetting 66 66
4.874	3.0	54.74	38.76	33.1	4.0	-34.8	0.0	0.0	57.0	41.0	74	54	-17.0	-13.0	H, PowerSetting 66 66
7.311	3.0	54.67	41.19	35.5	4.6	-34.1	0.0	0.0	60.7	47.2	74	54	-13.3	-6.8	H, PowerSetting 66 66
High Channel (2462 MHz)															
4.924	3.0	48.78	33.71	33.1	4.0	-34.8	0.0	0.0	51.1	36.0	74	54	-22.9	-18.0	V, PowerSetting 17 dBm
7.386	3.0	52.60	38.00	35.6	4.6	-34.1	0.0	0.0	58.7	44.1	74	54	-15.3	-9.9	V, PowerSetting 17 dBm
4.924	3.0	46.49	31.17	33.1	4.0	-34.8	0.0	0.0	48.8	33.5	74	54	-25.2	-20.5	H, PowerSetting 17 dBm
7.386	3.0	45.76	32.72	35.6	4.6	-34.1	0.0	0.0	51.9	38.8	74	54	-22.1	-15.2	H, PowerSetting 17 dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g, 40MHz MODE, LOW CHANNEL)

LOW CHANNEL PEAK (802.11g 40MHz mode, Horizontal)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 40MHz mode, Horizontal)

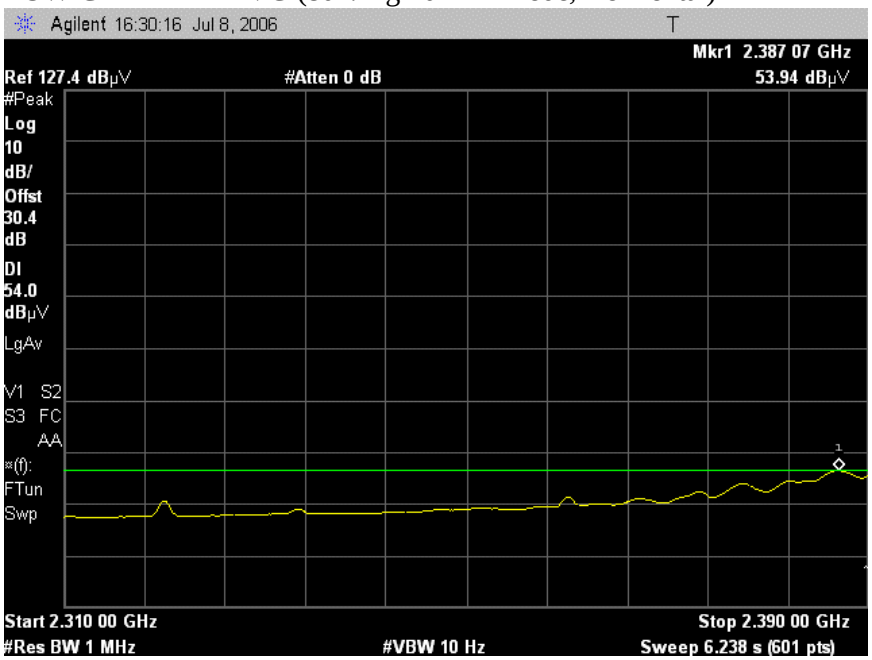

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11g 40MHz mode, Vertical)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 40MHz mode, Vertical)

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g, 40MGHz MODE, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11g 40MHz mode, Horizontal)

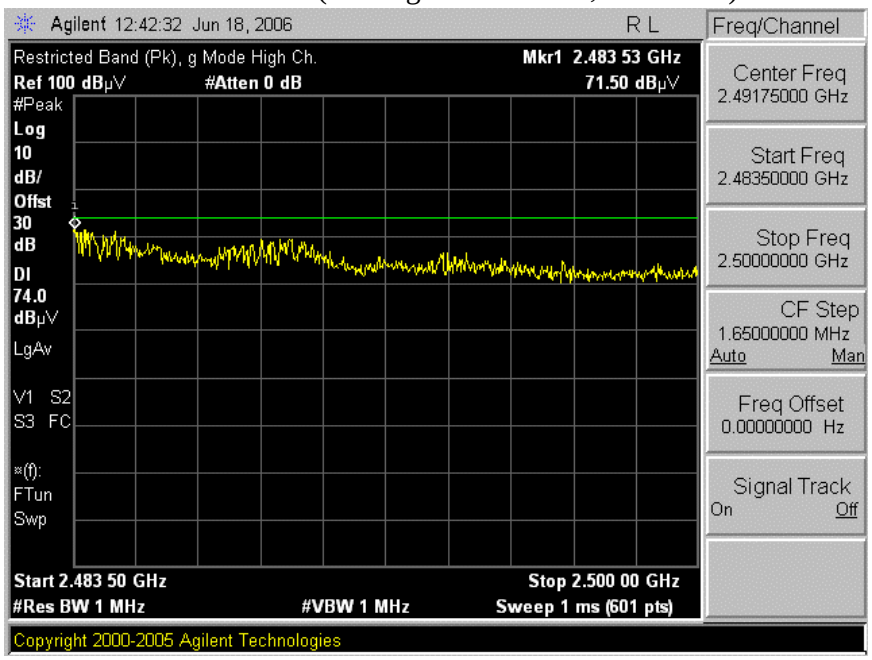

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11 g 40MHz mode, Horizontal)

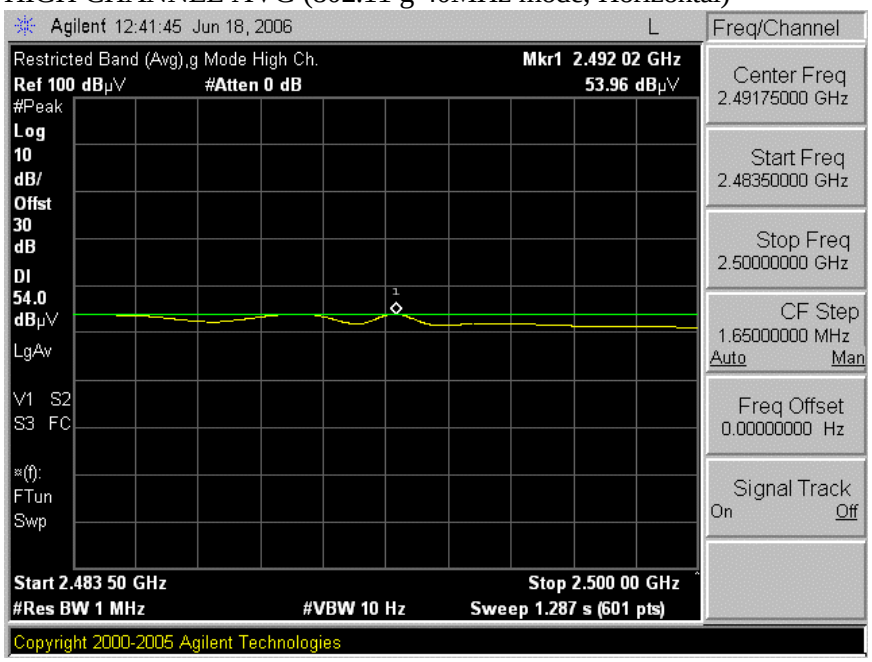

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11 g 40MHz mode, Vertical)

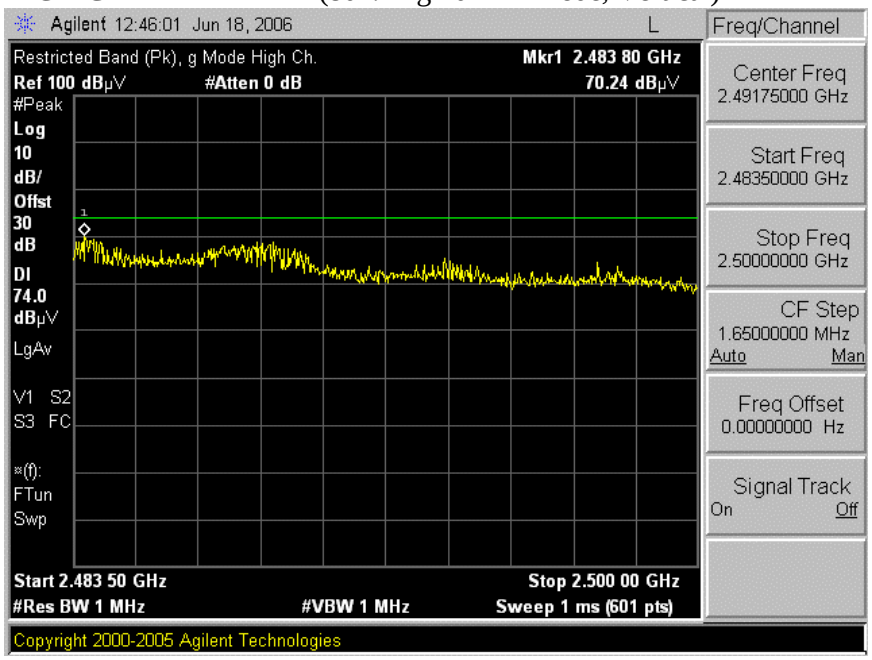

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11g 40MHz mode, Vertical)

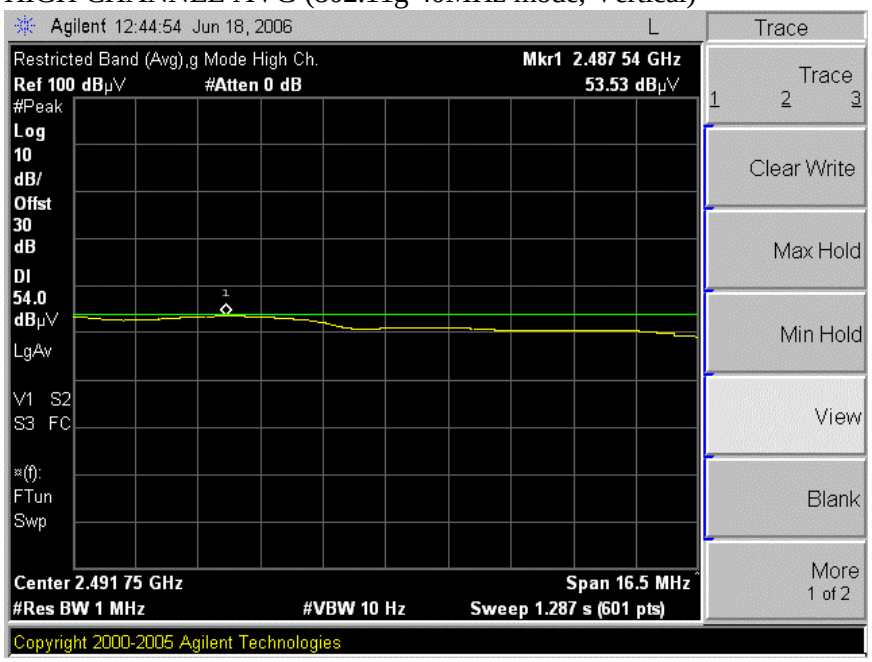

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11g 40MHz mode)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/10/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in 11g 40M mode, 54Mbps, w/Foxconn Antenna
EUT S/N: 010

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T60; S/N: 2238 @3m	T145 Agilent 3008A0 056		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001		R_001

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2422 MHz)															
4.844	3.0	48.25	32.65	33.0	4.0	-34.8	0.0	0.0	50.4	34.8	74	54	-23.6	-19.2	V, PowerSetting 5F 60
7.266	3.0	45.71	33.20	35.4	4.6	-34.7	0.0	0.0	51.1	38.6	74	54	-22.9	-15.4	V, PowerSetting 5F 60
4.844	3.0	43.84	30.60	33.0	4.0	-34.8	0.0	0.0	46.0	32.8	74	54	-28.0	-21.2	H, PowerSetting 5F 60
Mid Channel (2437 MHz)															
4.874	3.0	47.97	33.48	33.1	4.0	-34.9	0.0	0.0	50.2	35.7	74	54	-23.8	-18.3	V, PowerSetting 5E 5E
7.311	3.0	44.89	31.50	35.5	4.6	-34.7	0.0	0.0	50.3	36.9	74	54	-23.7	-17.1	V, PowerSetting 5E 5E
4.874	3.0	46.19	34.34	33.1	4.0	-34.9	0.0	0.0	48.4	36.5	74	54	-25.6	-17.5	H, PowerSetting 5E 5E
7.311	3.0	46.80	33.38	35.5	4.6	-34.7	0.0	0.0	52.2	38.8	74	54	-21.8	-15.2	H, PowerSetting 5E 5E
High Channel (2452 MHz)															
4.904	3.0	42.60	30.00	33.1	4.0	-34.9	0.0	0.0	44.8	32.2	74	54	-29.2	-21.8	V, PowerSetting 15 dBm
7.356	3.0	43.20	30.20	35.5	4.6	-34.6	0.0	0.0	48.7	35.7	74	54	-25.3	-18.3	V, PowerSetting 15 dBm
4.904	3.0	42.70	31.17	33.1	4.0	-34.9	0.0	0.0	44.9	33.4	74	54	-29.1	-20.6	H, PowerSetting 15 dBm
7.356	3.0	42.60	30.30	35.5	4.6	-34.6	0.0	0.0	48.1	35.8	74	54	-25.9	-18.2	H, PowerSetting 15 dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)

LOW CHANNEL PEAK (802.11n mode HT20, Horizontal)

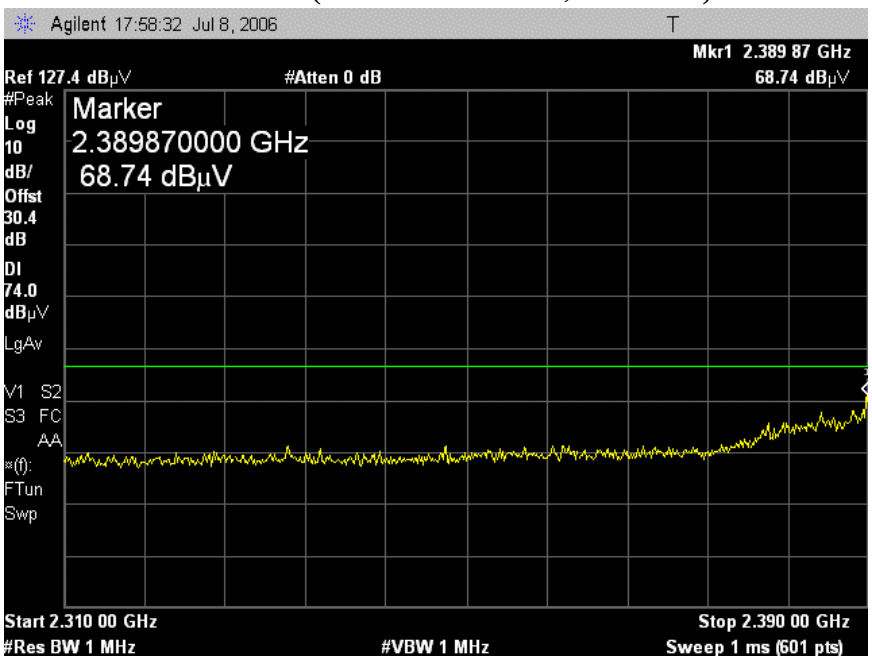

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT20, Horizontal)

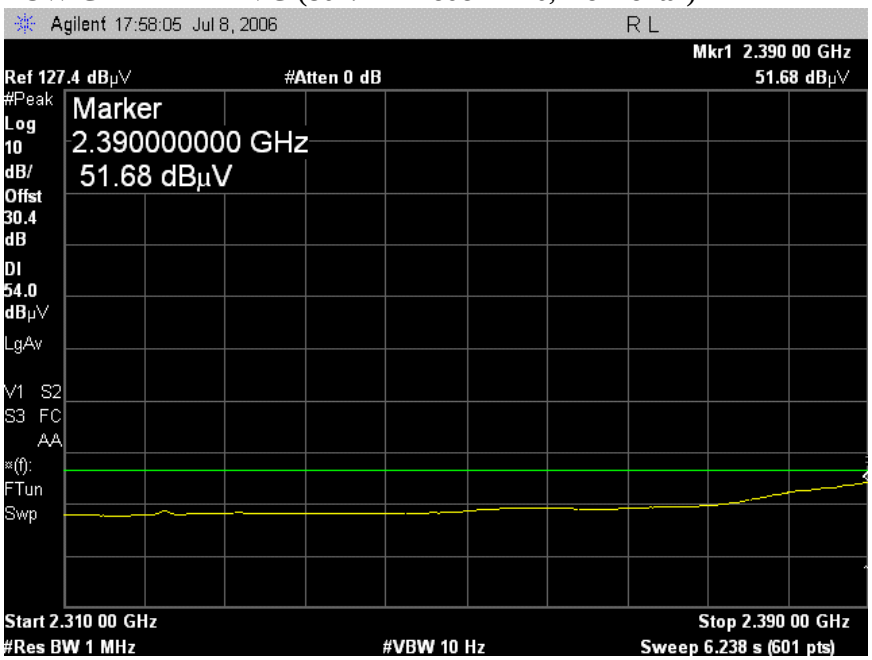

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11n mode H20, Vertical)

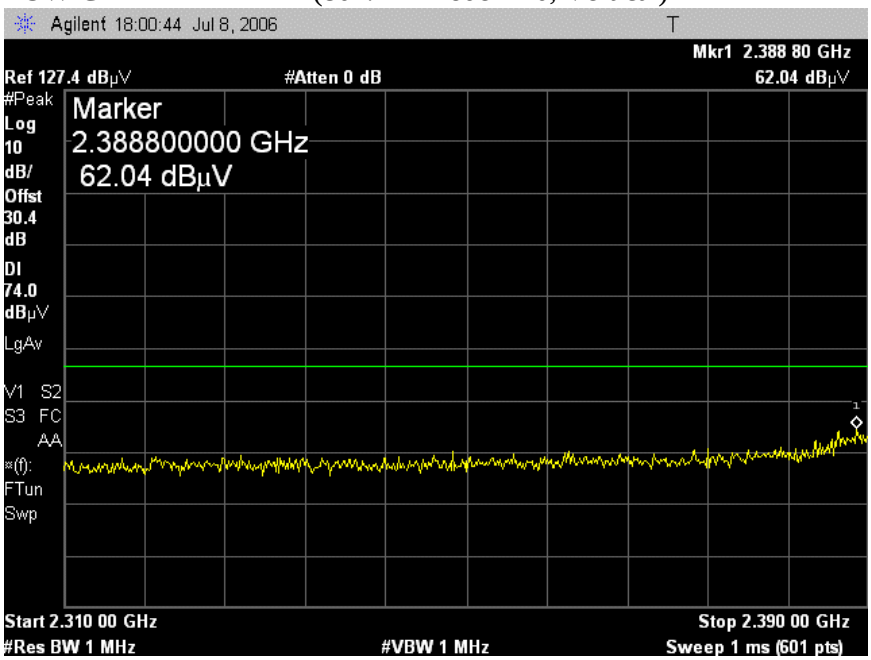

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT20, Vertical)

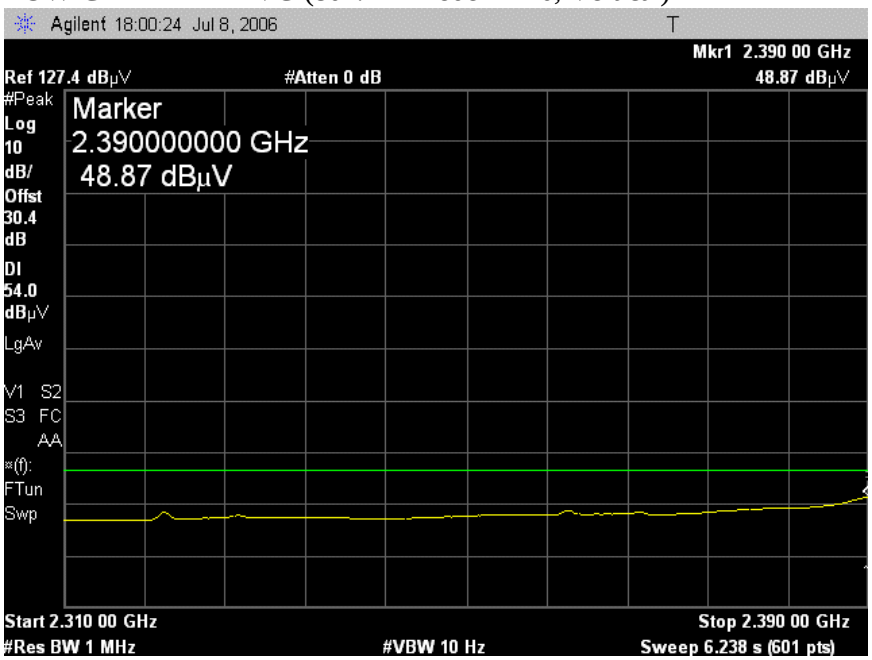

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11n mode HT20, Horizontal)

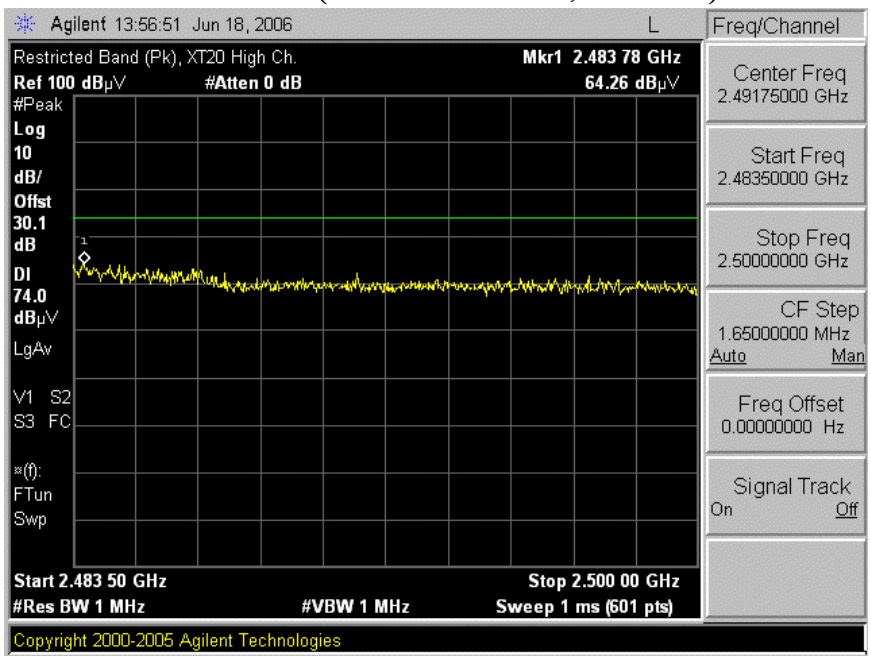

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT20, Horizontal)

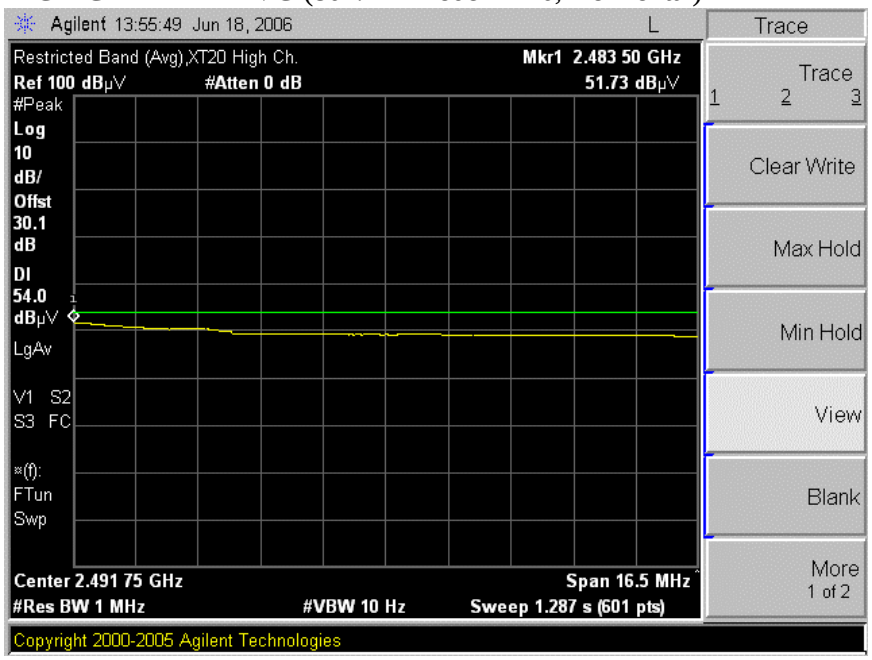

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11n mode HT20, Vertical)

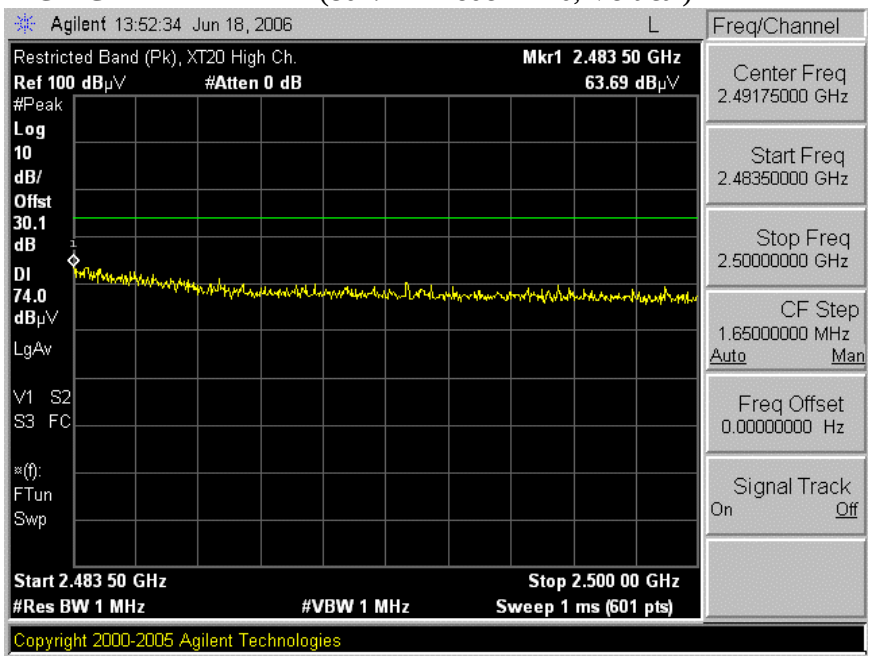

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT20, Vertical)

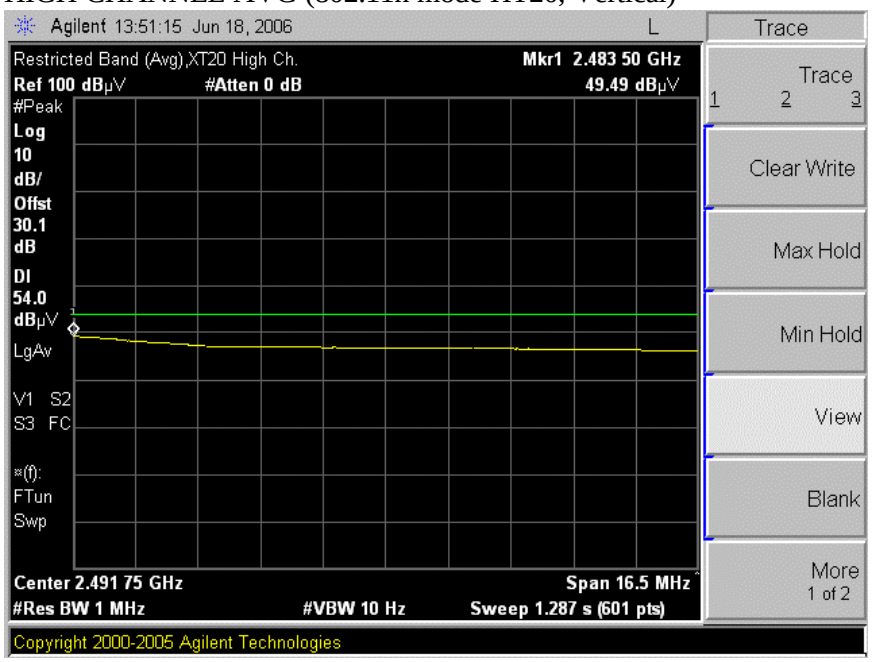

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/08/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in HT 20M mode, MCS11, w/Foxconn Antenna
EUT S/N: 010

~~Test Equipment~~:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T60; S/N: 2238 @3m	T34 HP 8449B		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001		R_001

~~Peak Measurements~~
RBW=VBW=1MHz
~~Average Measurements~~
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2412 MHz)															
4.824	3.0	43.34	30.60	33.0	4.0	-34.8	0.0	0.0	45.5	32.8	74	54	-28.5	-21.2	V, PowerSetting 60 60
4.824	3.0	45.30	31.38	33.0	4.0	-34.8	0.0	0.0	47.5	33.5	74	54	-26.5	-20.5	H, PowerSetting 60 60
Mid Channel (2437 MHz)															
4.874	3.0	47.05	35.36	33.1	4.0	-34.8	0.0	0.0	49.3	37.6	74	54	-24.7	-16.4	V, PowerSetting 64 65
7.311	3.0	50.98	38.29	35.5	4.6	-34.1	0.0	0.0	57.0	44.3	74	54	-17.0	-9.7	V, PowerSetting 64 65
4.874	3.0	53.13	38.04	33.1	4.0	-34.8	0.0	0.0	55.4	40.3	74	54	-18.6	-13.7	H, PowerSetting 64 65
7.311	3.0	52.13	38.71	35.5	4.6	-34.1	0.0	0.0	58.1	44.7	74	54	-15.9	-9.3	H, PowerSetting 64 65
High Channel (2462 MHz)															
4.924	3.0	45.80	31.70	33.1	4.0	-34.8	0.0	0.0	48.1	34.0	74	54	-25.9	-20.0	V, PowerSetting 15 dBm
7.386	3.0	49.60	37.50	35.6	4.6	-34.1	0.0	0.0	55.7	43.6	74	54	-18.3	-10.4	V, PowerSetting 15 dBm
4.924	3.0	42.40	31.50	33.1	4.0	-34.8	0.0	0.0	44.7	33.8	74	54	-29.3	-20.2	H, PowerSetting 15 dBm
7.386	3.0	42.10	30.00	35.6	4.6	-34.1	0.0	0.0	48.2	36.1	74	54	-25.8	-17.9	H, PowerSetting 15 dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)

LOW CHANNEL PEAK (802.11n mode HT40, Horizontal)

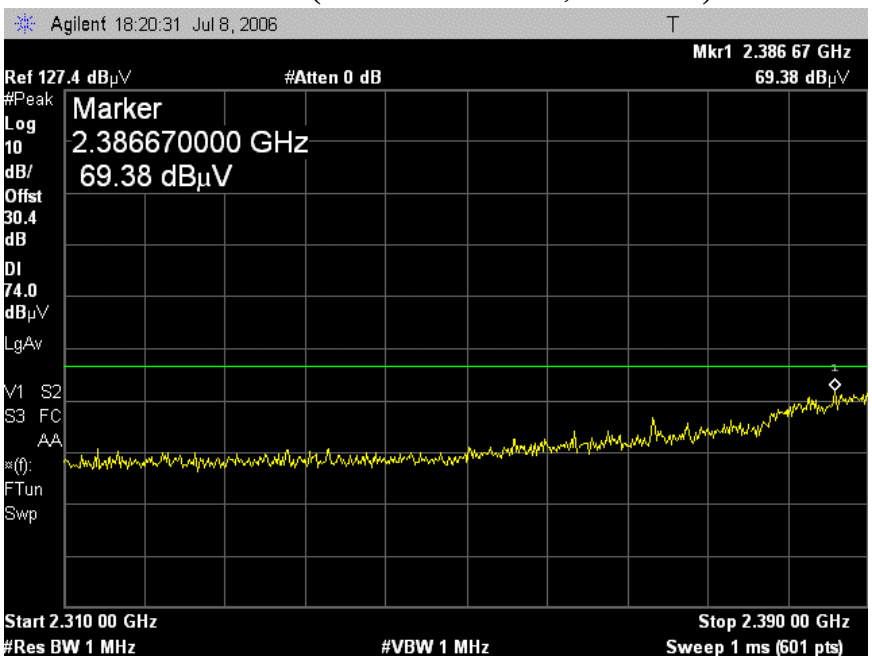

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT40, Horizontal)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11n mode H40, Vertical)

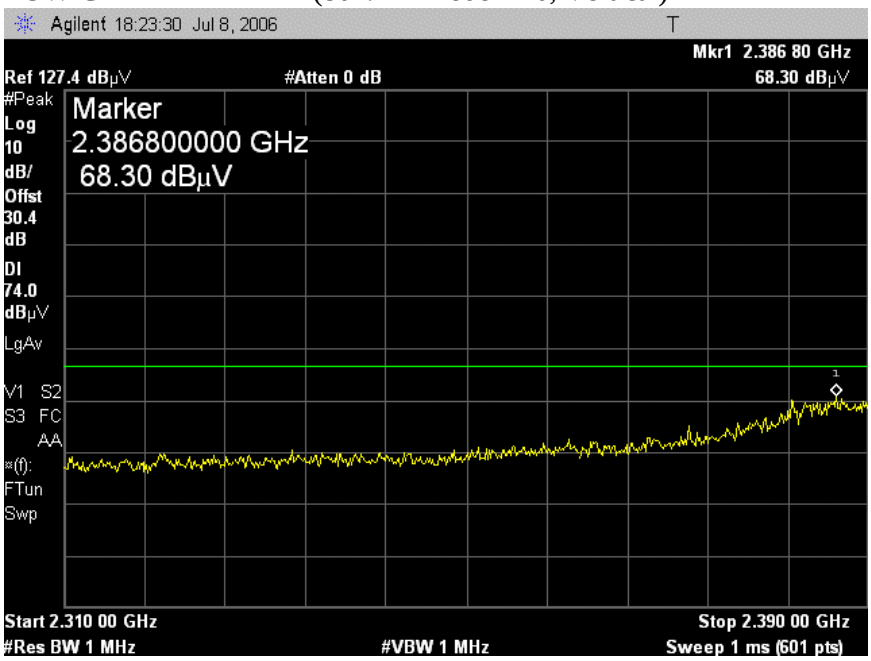

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT40, Vertical)

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11n mode HT40, Horizontal)

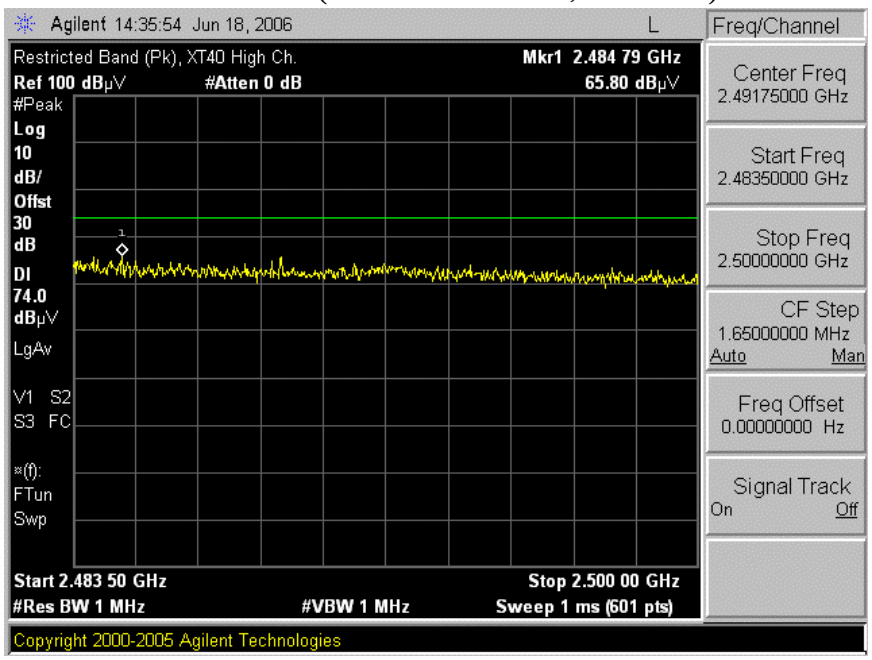

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT40, Horizontal)

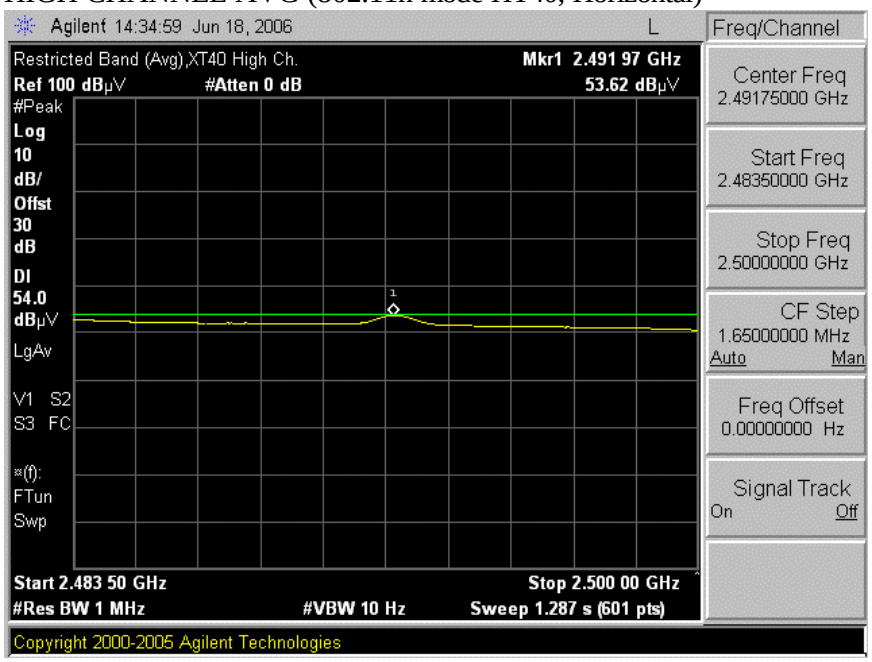

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11n mode HT40, Vertical)

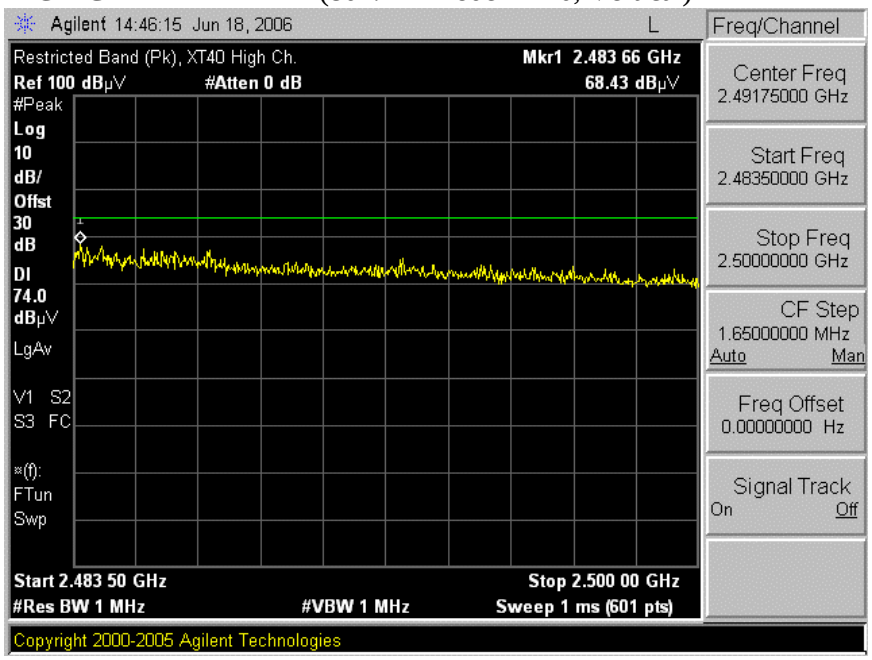

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT40, Vertical)

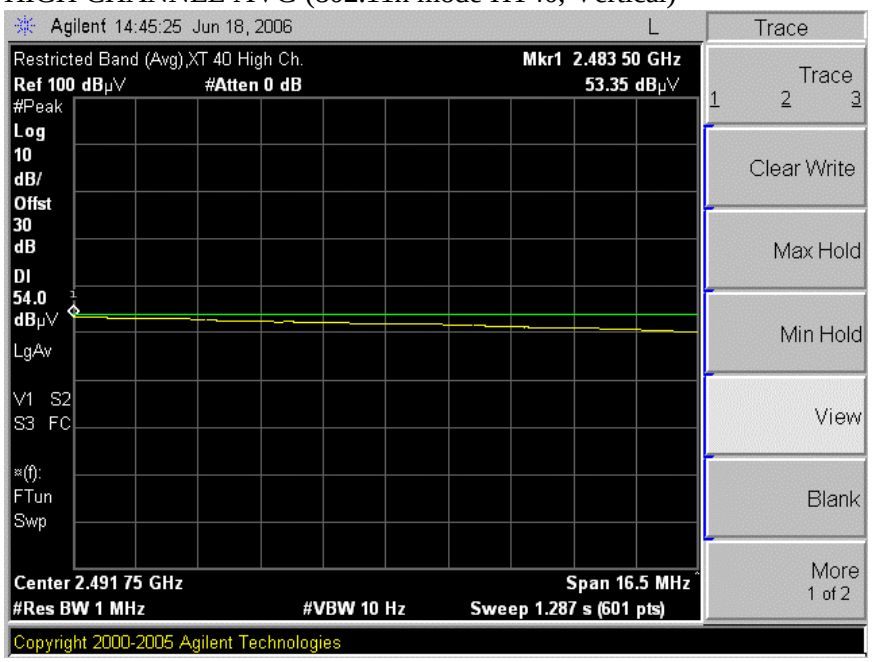

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/10/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in HT 40M mode, MCS15, w/Foxconn Antenna
EUT S/N: 010

~~Test Equipment~~:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T60; S/N: 2238 @3m	T145 Agilent 3008A0056		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001		R_001

~~Peak Measurements~~
RBW=VBW=1MHz
~~Average Measurements~~
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2422 MHz)															
4.844	3.0	49.15	33.45	33.0	4.0	-34.8	0.0	0.0	51.3	35.6	74	54	-22.7	-18.4	V, PowerSetting 62 63
7.266	3.0	45.70	33.50	35.4	4.6	-34.7	0.0	0.0	51.1	38.9	74	54	-22.9	-15.1	V, PowerSetting 62 63
4.844	3.0	44.49	30.90	33.0	4.0	-34.8	0.0	0.0	46.7	33.1	74	54	-27.3	-20.9	H, PowerSetting 62 63
7.266	3.0	43.97	30.40	35.4	4.6	-34.7	0.0	0.0	49.3	35.8	74	54	-24.7	-18.2	H, PowerSetting 62 63
Mid Channel (2437 MHz)															
4.874	3.0	46.80	31.40	33.1	4.0	-34.9	0.0	0.0	49.0	33.6	74	54	-25.0	-20.4	V, PowerSetting 14 dBm
7.311	3.0	41.80	30.00	35.5	4.6	-34.7	0.0	0.0	47.2	35.4	74	54	-26.8	-18.6	V, PowerSetting 14 dBm
4.874	3.0	44.60	30.10	33.1	4.0	-34.9	0.0	0.0	46.8	32.3	74	54	-27.2	-21.7	H, PowerSetting 14 dBm
7.311	3.0	40.50	30.00	35.5	4.6	-34.7	0.0	0.0	45.9	35.4	74	54	-28.1	-18.6	H, PowerSetting 14 dBm
High Channel (2452 MHz)															
4.904	3.0	41.50	29.70	33.1	4.0	-34.9	0.0	0.0	43.7	31.9	74	54	-30.3	-22.1	V, PowerSetting 14 dBm
7.356	3.0	43.20	29.50	35.5	4.6	-34.6	0.0	0.0	48.7	35.0	74	54	-25.3	-19.0	V, PowerSetting 14 dBm
4.904	3.0	42.70	29.50	33.1	4.0	-34.9	0.0	0.0	44.9	31.7	74	54	-29.1	-22.3	H, PowerSetting 14 dBm
7.356	3.0	42.90	30.10	35.5	4.6	-34.6	0.0	0.0	48.4	35.6	74	54	-25.6	-18.4	H, PowerSetting 14 dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

7.3.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

RESTRICTED BANDEDGE (802.11b MODE, LOW CHANNEL)
DUCK ANTENNA

LOW CHANNEL PEAK (802.11b mode, Horizontal)

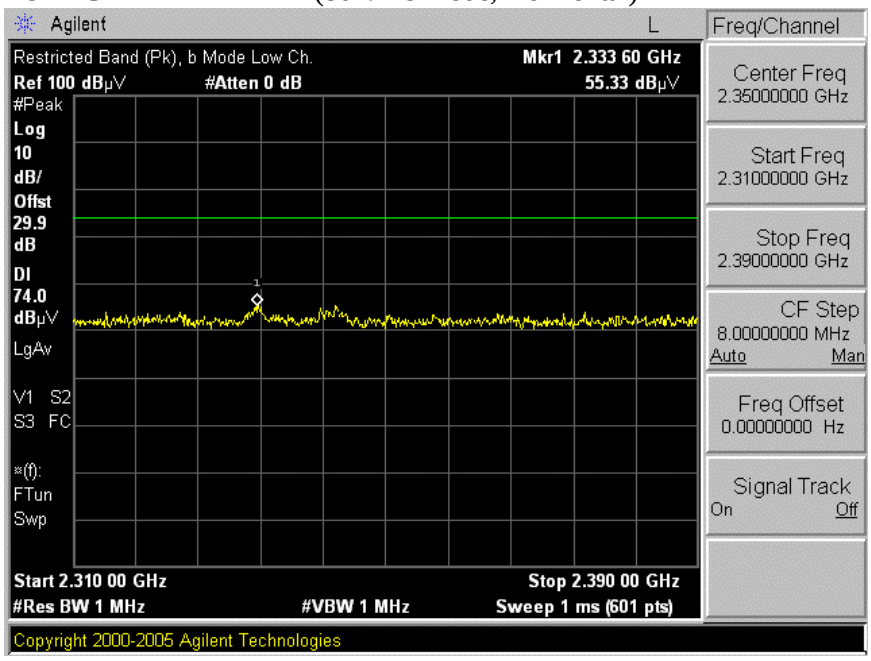

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11b mode, Horizontal)

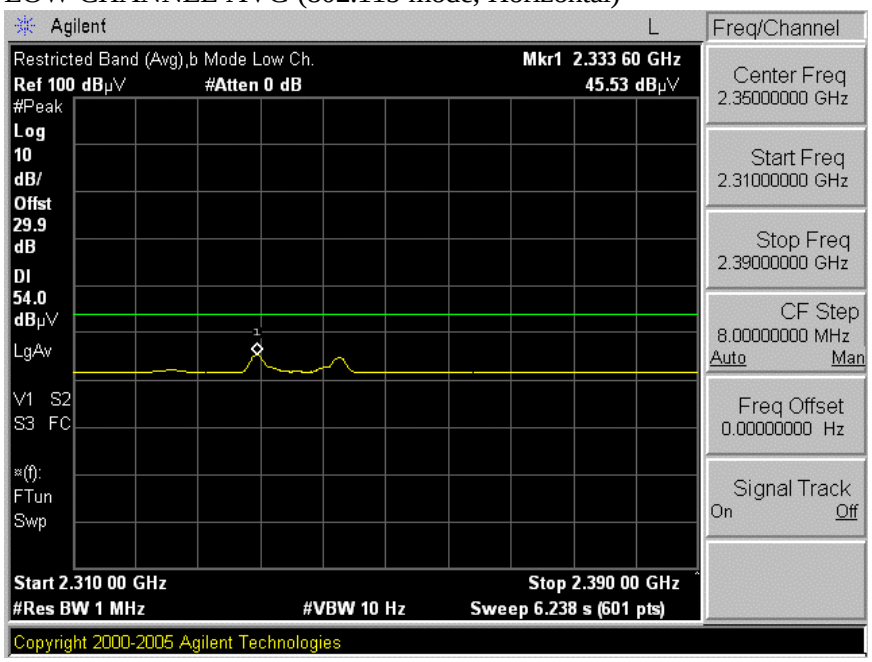

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11b mode, Vertical)

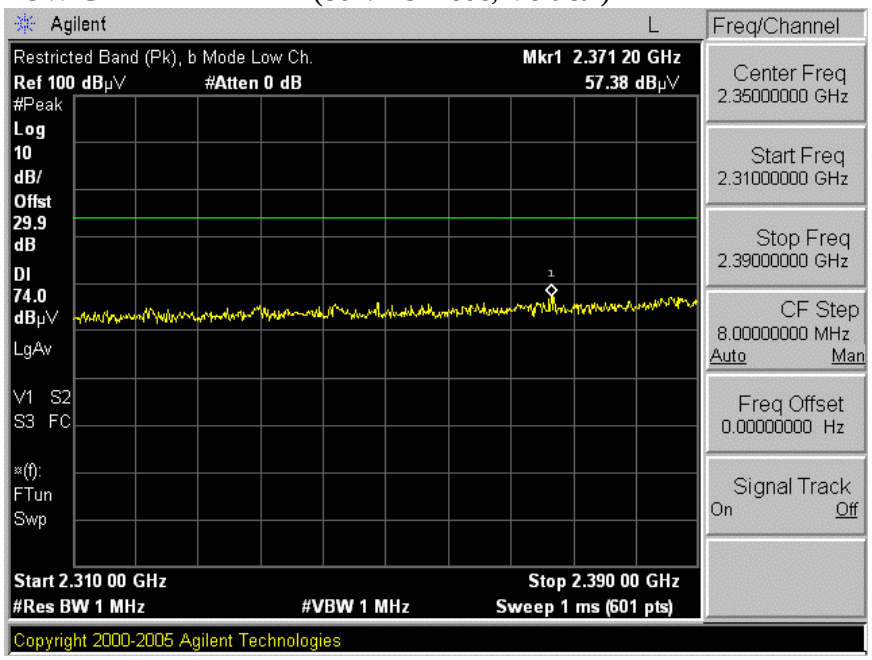

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11b mode, Vertical)

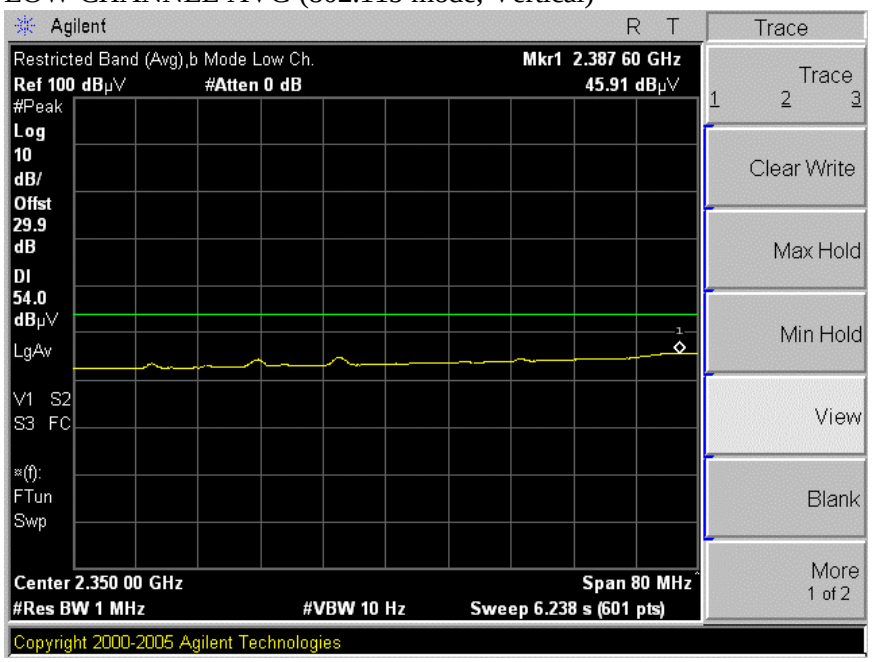

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11b MODE, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11b mode, Horizontal)

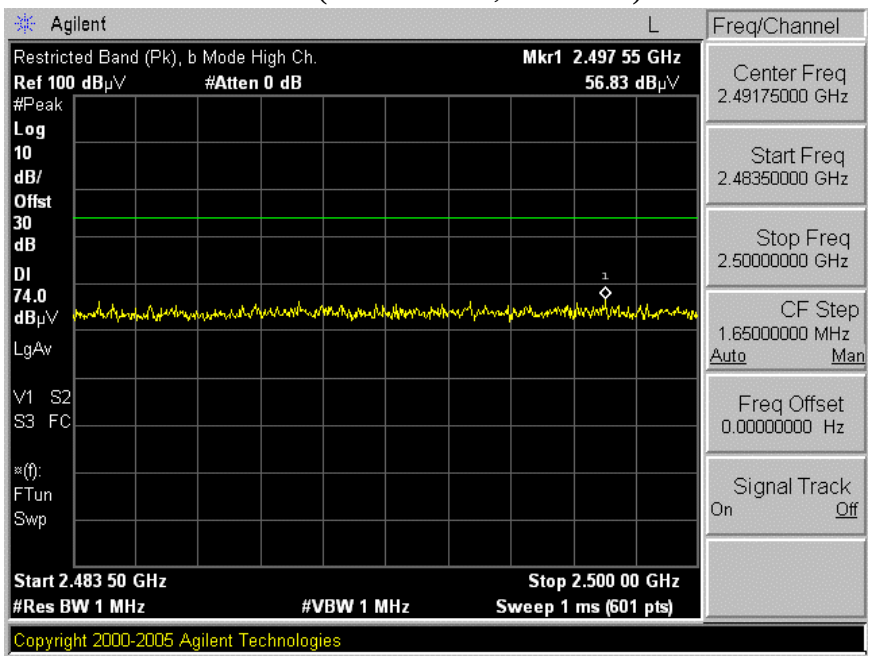

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11b mode, Horizontal)

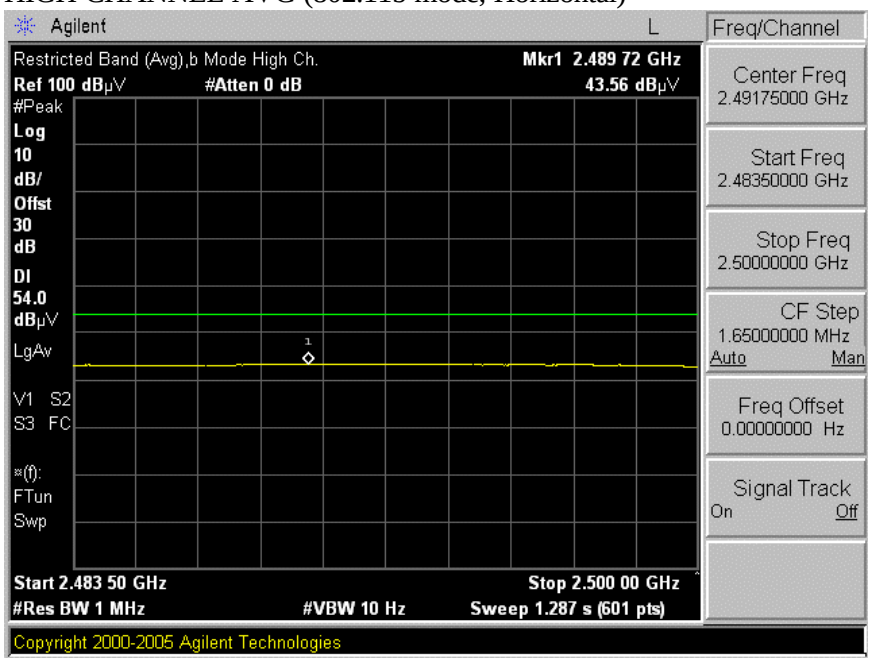

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11b mode, Vertical)

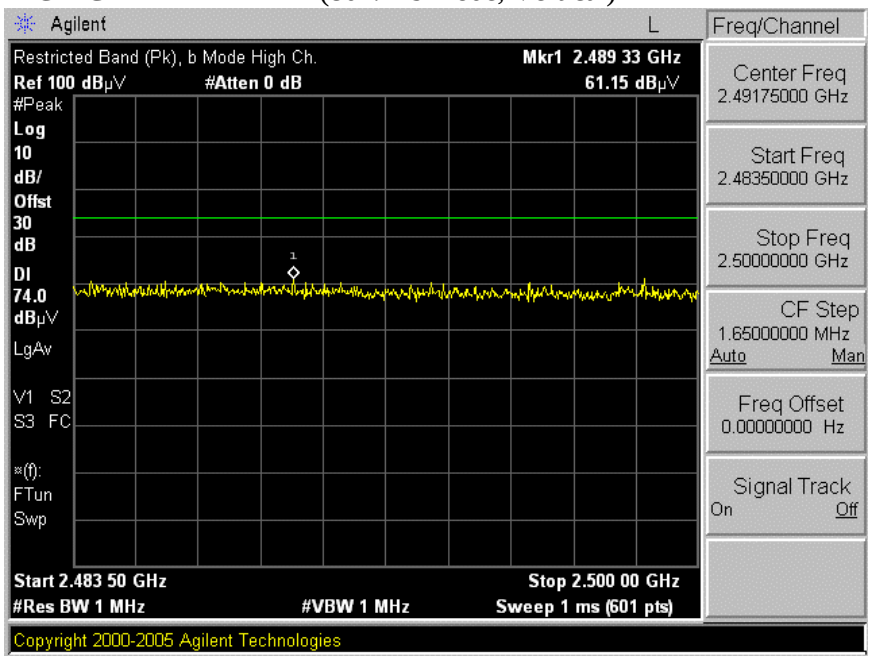

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11b mode, Vertical)

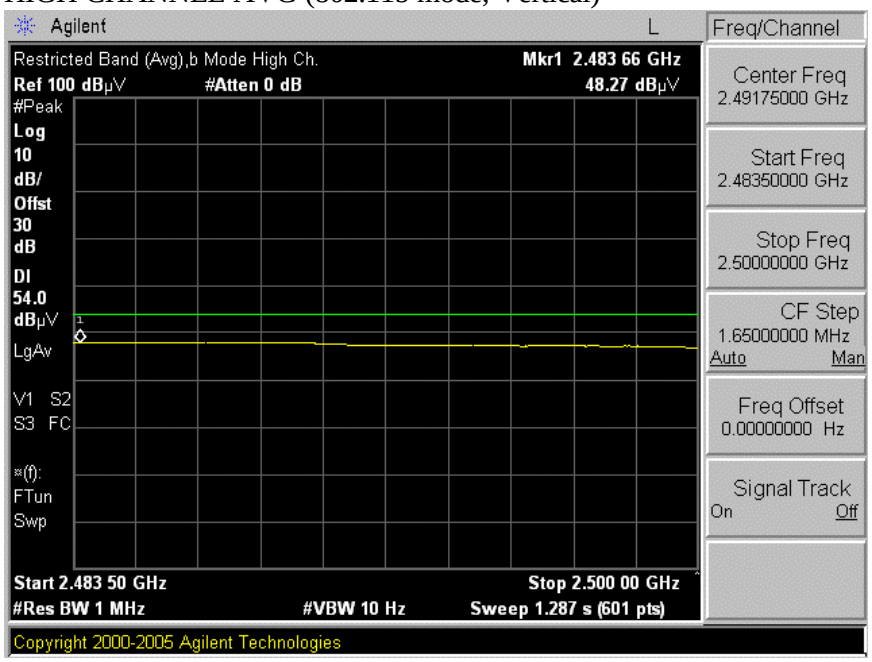

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date:06/17/2006
Test Engineer: THANH NGUYEN
Configuration:EUT , Extender card, Support Laptop.
Mode: Continously Transmitting b mode

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T73; S/N: 6717 @3m	T144 Miteq 3008A00931		

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
Thanh 177079008		Thanh 208946003	HPF_4.0GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Tx Ch 11															
4.924	3.0	47.55	36.05	33.4	2.8	-36.5	0.0	0.6	47.9	36.4	74	54	-26.1	-17.6	V
7.386	3.0	46.83	35.73	35.0	3.3	-36.2	0.0	0.6	49.6	38.5	74	54	-24.4	-15.5	V
9.848	3.0	44.73	35.65	36.8	3.7	-37.0	0.0	0.8	49.1	40.0	74	54	-24.9	-14.0	V
12.310	3.0	44.32	31.70	37.6	4.4	-35.4	0.0	0.9	51.7	39.1	74	54	-22.3	-14.9	Noise floor
4.924	3.0	44.26	31.56	33.4	2.8	-36.5	0.0	0.6	44.6	31.9	74	54	-29.4	-22.1	H
7.386	3.0	42.11	30.66	35.0	3.3	-36.2	0.0	0.6	44.9	33.5	74	54	-29.1	-20.5	Noise floor
Tx Ch 6															
4.874	3.0	47.39	34.53	33.4	2.8	-36.5	0.0	0.6	47.7	34.8	74	54	-26.3	-19.2	V
7.311	3.0	45.60	34.05	35.0	3.3	-36.2	0.0	0.6	48.3	36.8	74	54	-25.7	-17.2	V
9.784	3.0	47.83	41.13	36.8	3.7	-37.0	0.0	0.8	52.2	45.5	74	54	-21.8	-8.5	V
12.185	3.0	43.88	32.26	37.6	4.3	-35.4	0.0	0.9	51.3	39.7	74	54	-22.7	-14.3	Noise floor
4.874	3.0	43.58	31.09	33.4	2.8	-36.5	0.0	0.6	43.9	31.4	74	54	-30.1	-22.6	H
7.311	3.0	44.59	31.28	35.0	3.3	-36.2	0.0	0.6	47.3	34.0	74	54	-26.7	-20.0	H
9.784	3.0	49.12	42.81	36.8	3.7	-37.0	0.0	0.8	53.4	47.1	74	54	-20.6	-6.9	H
12.185	3.0	43.75	31.78	37.6	4.3	-35.4	0.0	0.9	51.2	39.2	74	54	-22.8	-14.8	Noise floor
Tx Ch1															
4.824	3.0	47.03	33.84	33.3	2.8	-36.5	0.0	0.6	47.2	34.1	74	54	-26.8	-19.9	V
7.236	3.0	46.82	33.55	34.9	3.3	-36.2	0.0	0.6	49.5	36.2	74	54	-24.5	-17.8	V
9.648	3.0	44.97	35.27	36.7	3.7	-37.0	0.0	0.8	49.3	39.6	74	54	-24.7	-14.4	V
12.060	3.0	43.83	32.17	37.7	4.3	-35.4	0.0	0.9	51.3	39.7	74	54	-22.7	-14.3	Noise floor
4.824	3.0	46.62	34.16	33.3	2.8	-36.5	0.0	0.6	46.8	34.4	74	54	-27.2	-19.6	H
7.236	3.0	43.71	31.90	34.9	3.3	-36.2	0.0	0.6	46.4	34.6	74	54	-27.6	-19.4	H
9.648	3.0	48.14	40.65	36.7	3.7	-37.0	0.0	0.8	52.4	44.9	74	54	-21.6	-9.1	H
12.060	3.0	44.22	32.01	37.7	4.3	-35.4	0.0	0.9	51.7	39.5	74	54	-22.3	-14.5	Noise floor
No other emissions were detected above 12GHz															

Rev. 5.1.6

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

COMPLIANCE CERTIFICATION SERVICES DOCUMENT NO: CCSUP4031A
561F MONTEREY ROAD, MORGAN HILL, CA 95037 USA TEL: (408) 463-0885 FAX: (408) 463-0888
This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g 20M MODE, LOW CHANNEL)

LOW CHANNEL PEAK (802.11g 20M mode, Horizontal)

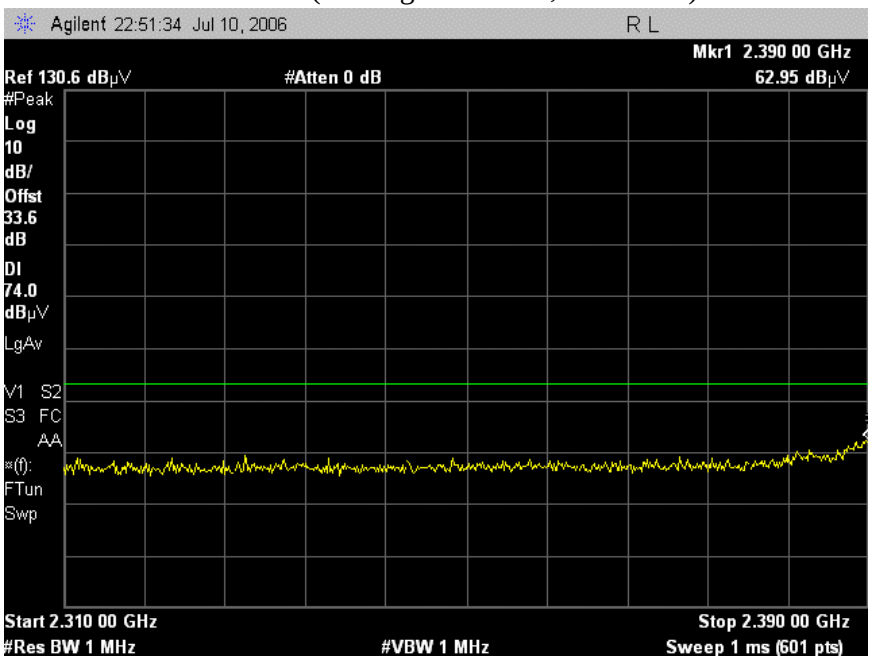

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 20M mode, Horizontal)

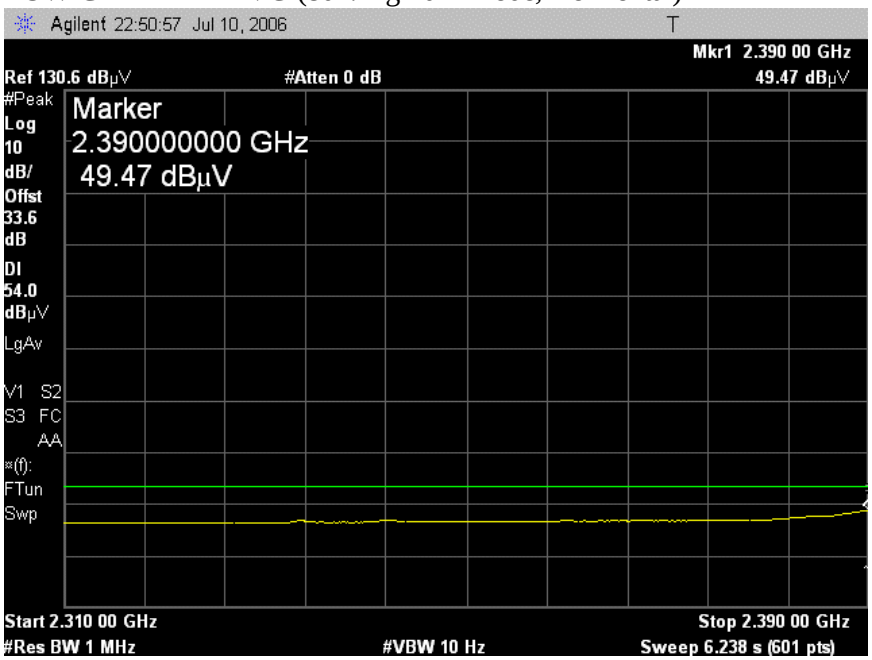

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11g 20M mode, Vertical)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 20M mode, Vertical)

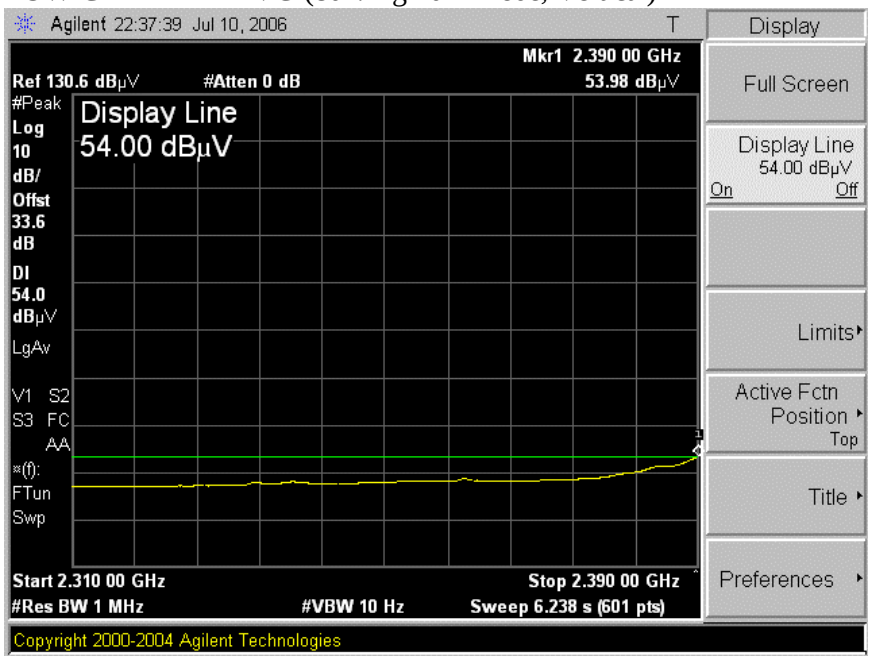

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g 20M MODE, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11g 20M mode, Horizontal)

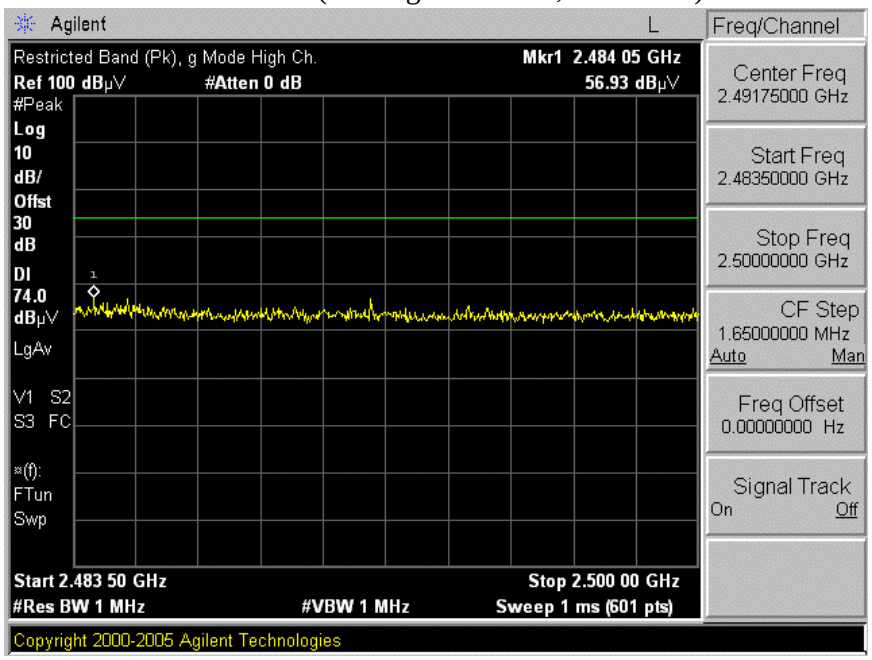

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11g 20M mode, Horizontal)

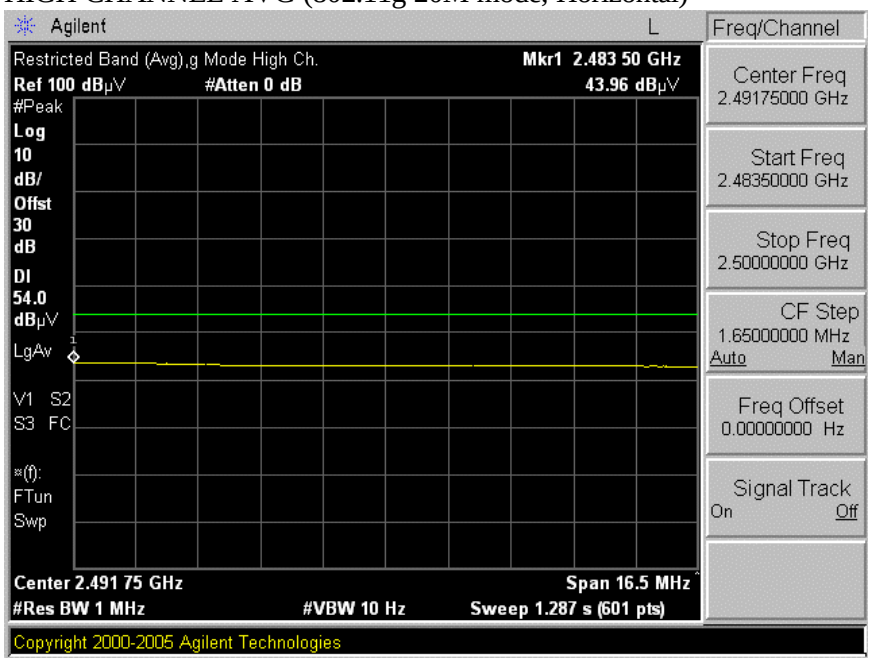

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11g 20M mode, Vertical)

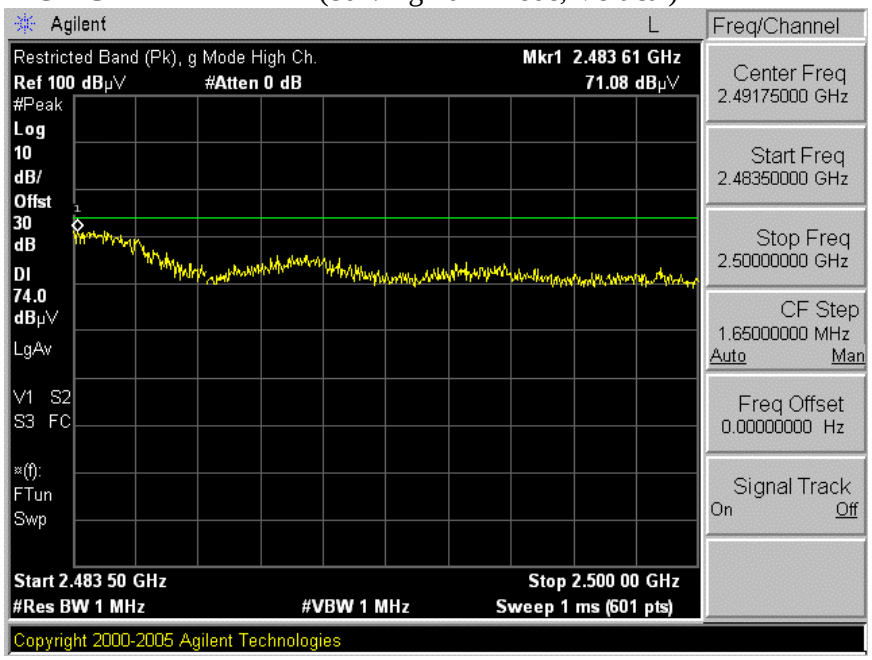

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11g 20M mode, Vertical)

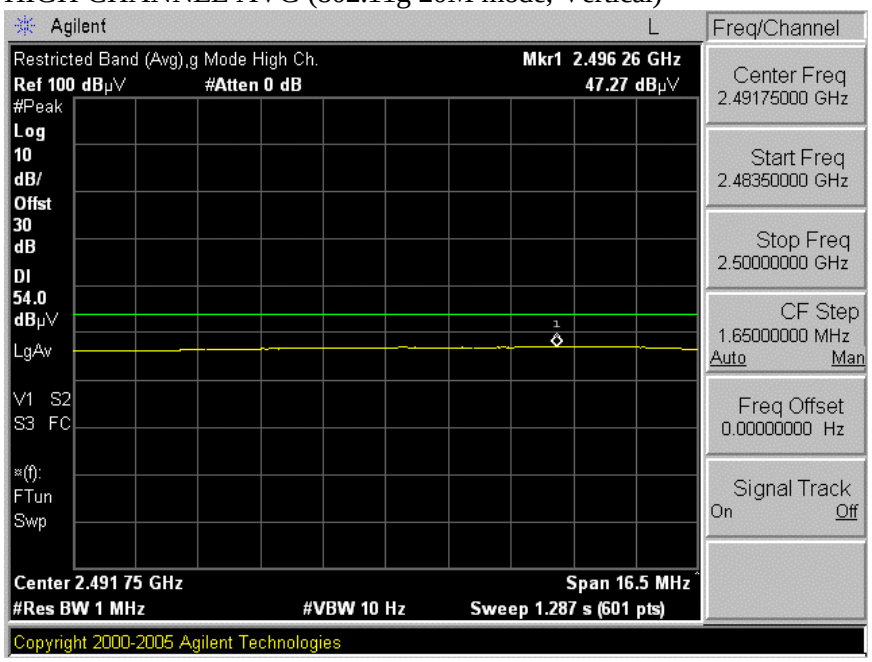

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11g 20M MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/11/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in 11g 20M mode, 54Mbps, w/Duck Antenna
EUT S/N: 010

Test Equipment:

Horn 1-18GHz: T136; M/N: 3117 @3m
Pre-amplifer 1-26GHz: T87 Miteq 924342
Pre-amplifer 26-40GHz:
Horn > 18GHz: T89; ARA 18-26GHz; S/N:1049
2 foot cable:
3 foot cable: Frank 177080001
12 foot cable: Frank 187209001
HPF:
Reject Filter: R_001

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2412 MHz)															
4.824	3.0	58.96	42.90	33.7	4.0	-45.3	0.0	0.0	51.3	35.3	74	54	-22.7	-18.7	V, PowerSetting 61 62
4.824	3.0	52.08	39.60	33.7	4.0	-45.3	0.0	0.0	44.5	32.0	74	54	-29.5	-22.0	H, PowerSetting 61 62
Mid Channel (2437 MHz)															
4.874	3.0	66.85	54.74	33.7	4.0	-45.3	0.0	0.0	59.3	47.1	74	54	-14.7	-6.9	V, PowerSetting 66 66
7.311	3.0	61.53	48.70	35.2	4.6	-43.2	0.0	0.0	58.2	45.3	74	54	-15.8	-8.7	V, PowerSetting 66 66
4.874	3.0	57.09	43.51	33.7	4.0	-45.3	0.0	0.0	49.5	35.9	74	54	-24.5	-18.1	H, PowerSetting 66 66
7.311	3.0	53.64	41.15	35.2	4.6	-43.2	0.0	0.0	50.3	37.8	74	54	-23.7	-16.2	H, PowerSetting 66 66
High Channel (2462 MHz)															
4.924	3.0	55.70	41.00	33.8	4.0	-45.4	0.0	0.0	48.1	33.4	74	54	-25.9	-20.6	V, PowerSetting 16dBm
7.386	3.0	53.20	40.10	35.3	4.6	-43.1	0.0	0.0	50.0	36.9	74	54	-24.0	-17.1	V, PowerSetting 16dBm
4.924	3.0	52.10	41.20	33.8	4.0	-45.4	0.0	0.0	44.5	33.6	74	54	-29.5	-20.4	H, PowerSetting 16dBm
7.386	3.0	52.80	39.40	35.3	4.6	-43.1	0.0	0.0	49.6	36.2	74	54	-24.4	-17.8	H, PowerSetting 16dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g, 40MGHz MODE, LOW CHANNEL)

LOW CHANNEL PEAK (802.11g 40MHz mode, Horizontal)

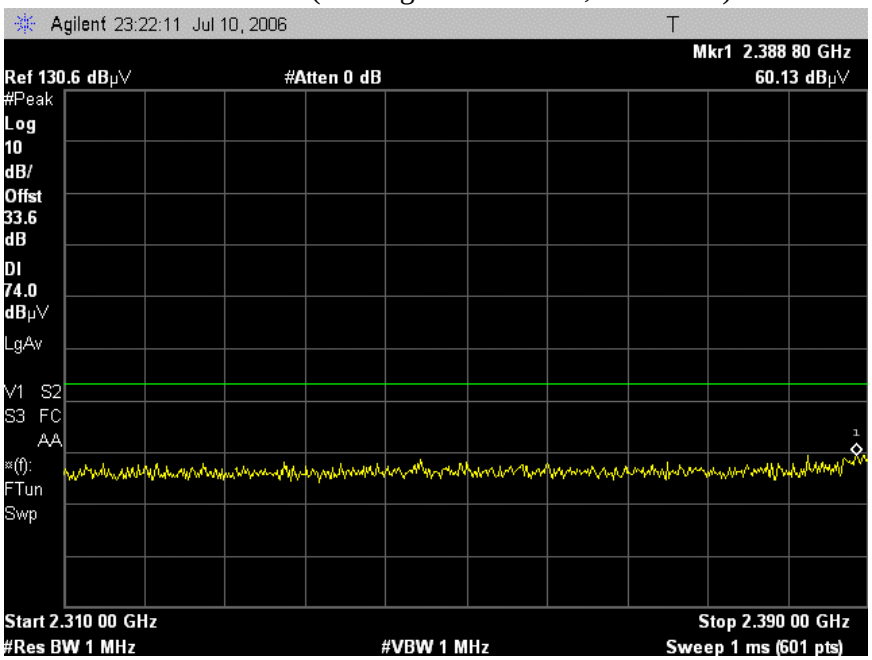

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 40MHz mode, Horizontal)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11g 40MHz mode, Vertical)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11g 40MHz mode, Vertical)

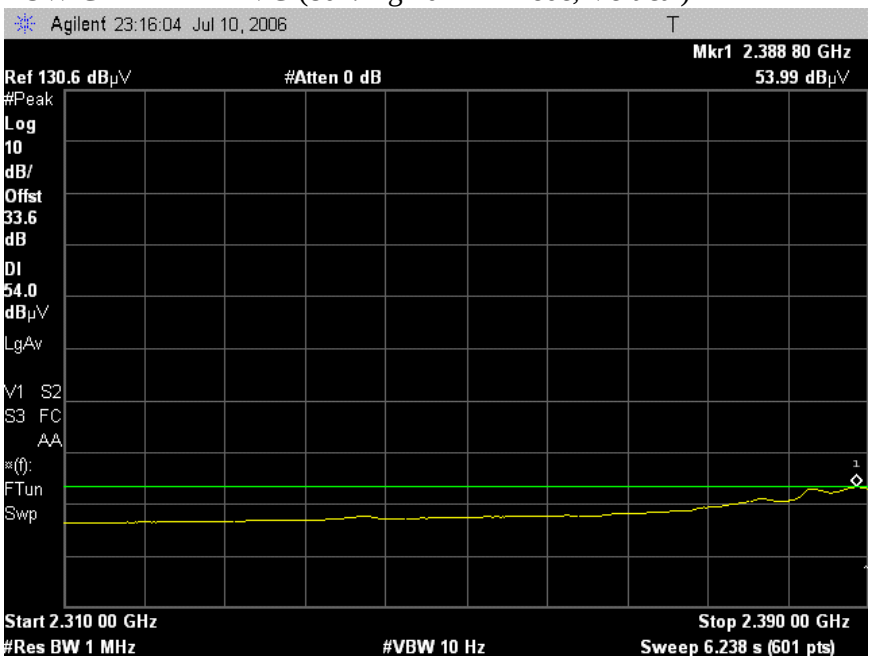

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11g, 40MGHz MODE, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11g 40MHz mode, Horizontal)

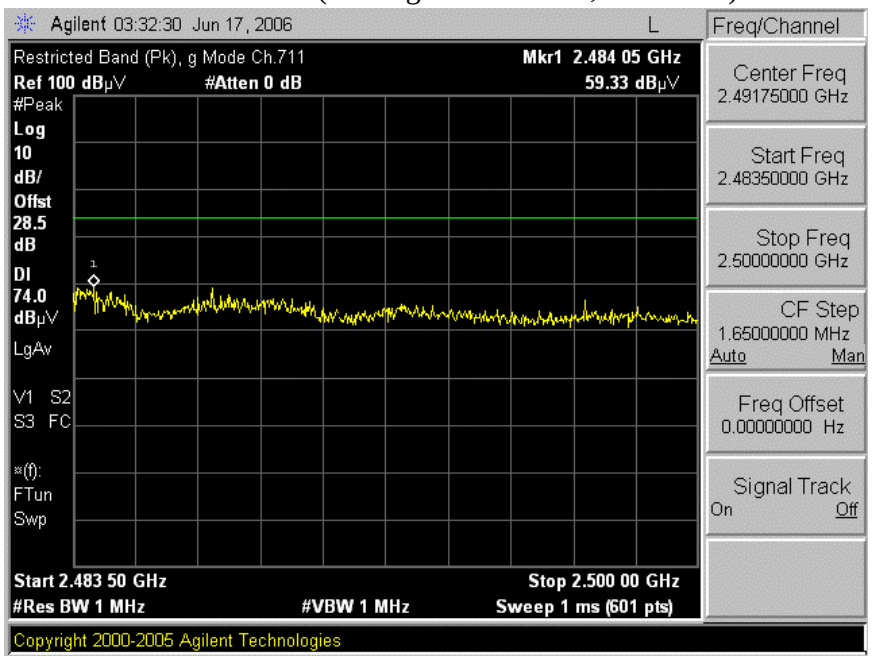

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11 g 40MHz mode, Horizontal)

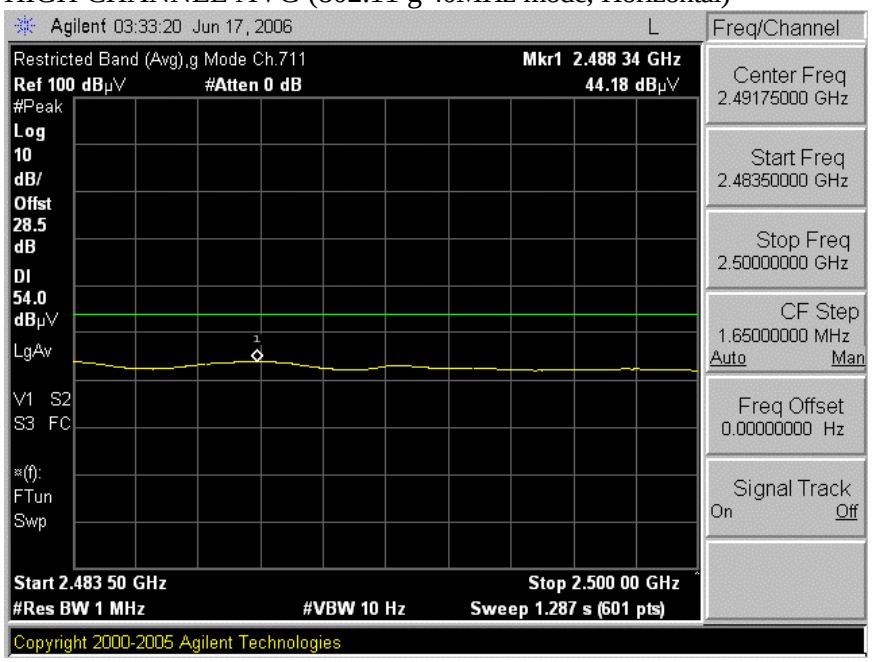

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11 g 40MHz mode, Vertical)

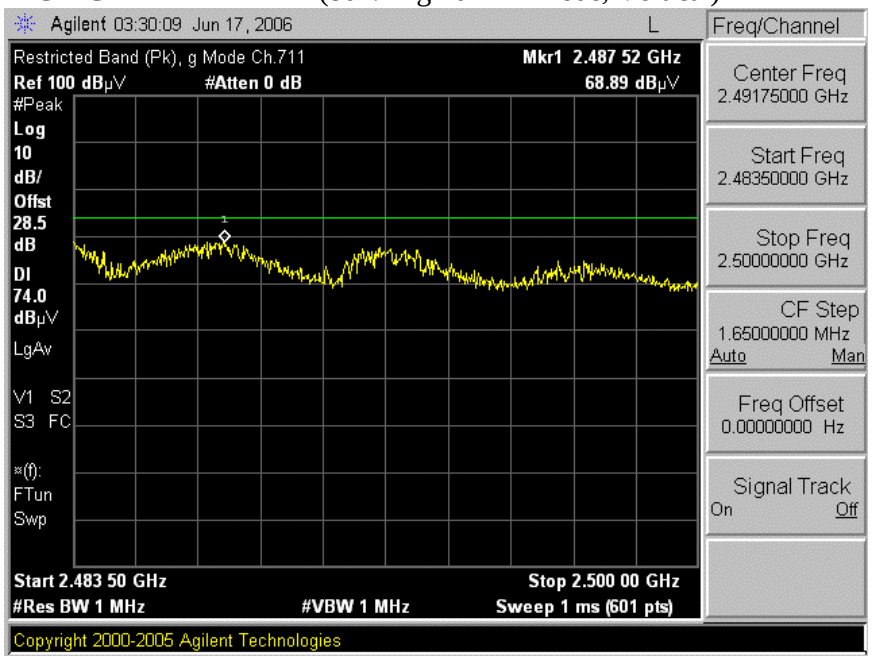

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11g 40MHz mode, Vertical)

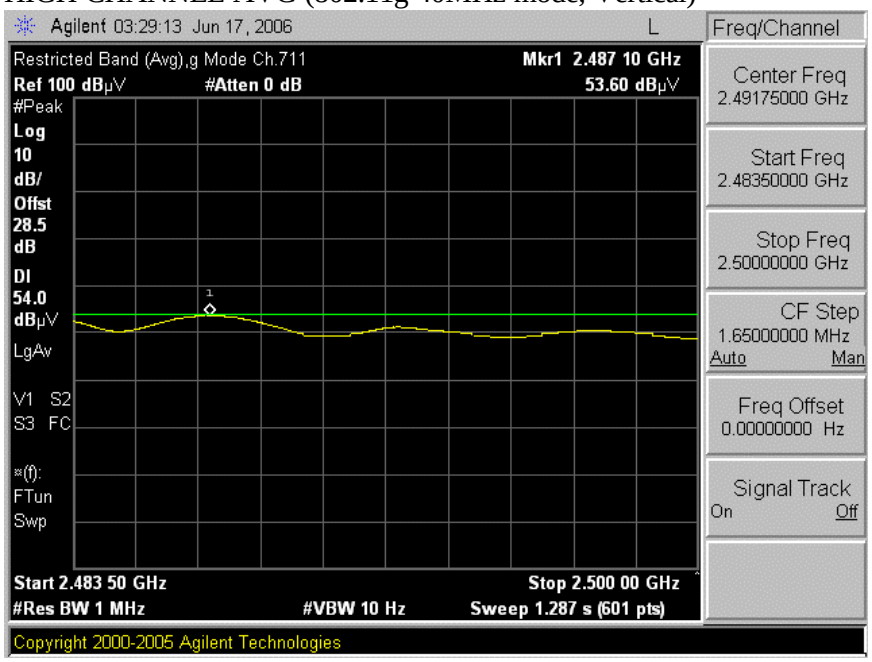

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11g 40MHz mode)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/11/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in 11g 40M mode, 54Mbps, w/Duck Antenna
EUT S/N: 010

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T136; M/N: 3117 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001		R_001

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2422 MHz)															
4.844	3.0	54.20	40.40	33.7	4.0	-45.3	0.0	0.0	46.6	32.8	74	54	-27.4	-21.2	V, PowerSetting 5F 60
7.266	3.0	52.09	39.80	35.2	4.6	-43.3	0.0	0.0	48.6	36.3	74	54	-25.4	-17.7	V, PowerSetting 5F 60
4.844	3.0	52.80	39.30	33.7	4.0	-45.3	0.0	0.0	45.2	31.7	74	54	-28.8	-22.3	H, PowerSetting 5F 60
Mid Channel (2437 MHz)															
4.874	3.0	54.05	40.50	33.7	4.0	-45.3	0.0	0.0	46.5	32.9	74	54	-27.5	-21.1	V, PowerSetting 5E 5E
7.311	3.0	50.98	37.60	35.2	4.6	-43.2	0.0	0.0	47.6	34.2	74	54	-26.4	-19.8	V, PowerSetting 5E 5E
4.874	3.0	51.10	38.70	33.7	4.0	-45.3	0.0	0.0	43.5	31.1	74	54	-30.5	-22.9	H, PowerSetting 5E 5E
7.311	3.0	50.20	37.70	35.2	4.6	-43.2	0.0	0.0	46.8	34.3	74	54	-27.2	-19.7	H, PowerSetting 5E 5E
High Channel (2452 MHz)															
4.904	3.0	54.40	42.00	33.8	4.0	-45.3	0.0	0.0	46.8	34.4	74	54	-27.2	-19.6	V, PowerSetting 15dBm
7.356	3.0	52.30	40.30	35.3	4.6	-43.1	0.0	0.0	49.0	37.0	74	54	-25.0	-17.0	V, PowerSetting 15dBm
4.904	3.0	52.10	41.10	33.8	4.0	-45.3	0.0	0.0	44.5	33.5	74	54	-29.5	-20.5	H, PowerSetting 15dBm
7.356	3.0	51.10	39.00	35.3	4.6	-43.1	0.0	0.0	47.8	35.7	74	54	-26.2	-18.3	H, PowerSetting 15dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)

LOW CHANNEL PEAK (802.11n mode HT20, Horizontal)

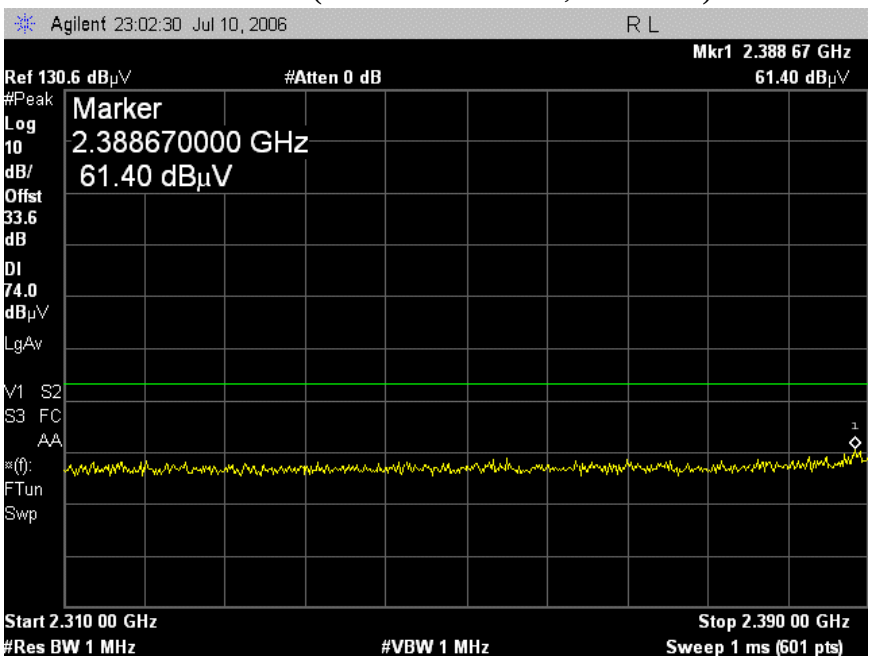

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT20, Horizontal)

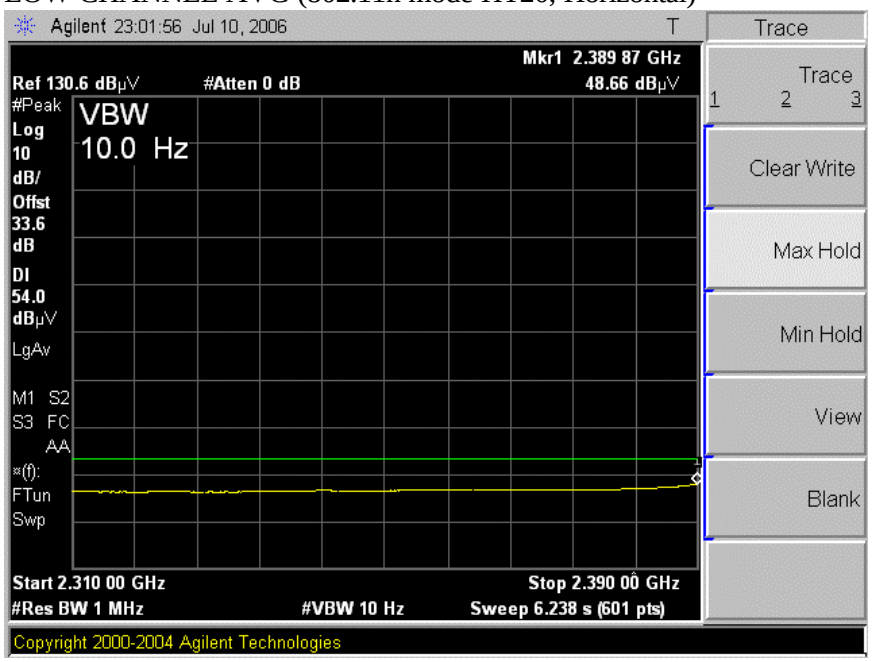

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11n mode H20, Vertical)

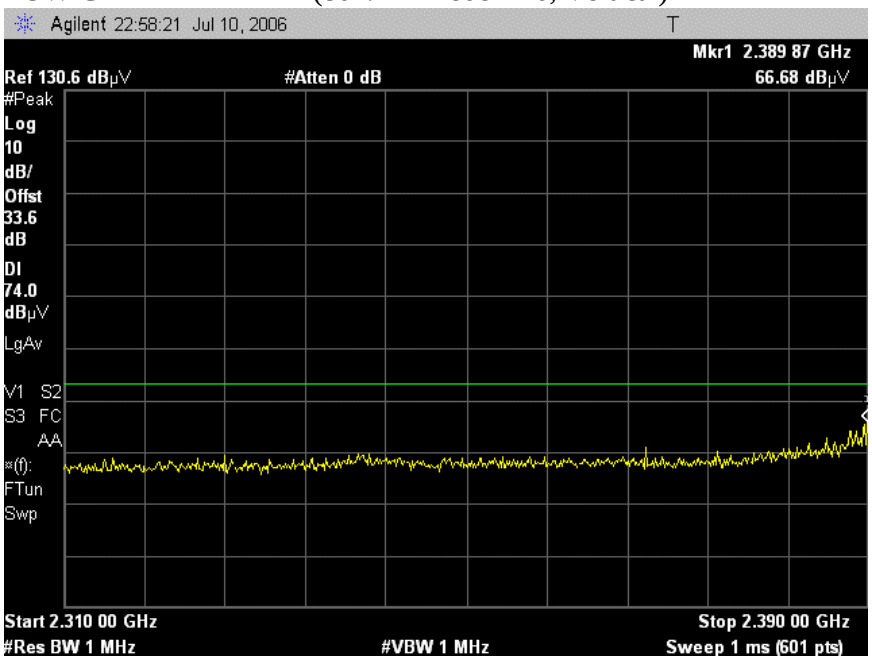

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT20, Vertical)

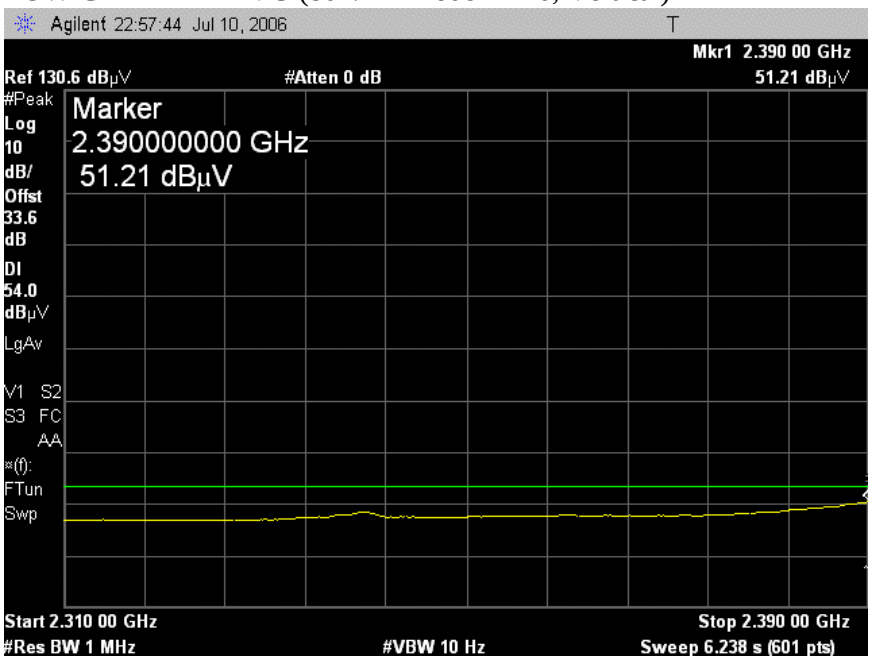

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11n mode HT20, Horizontal)

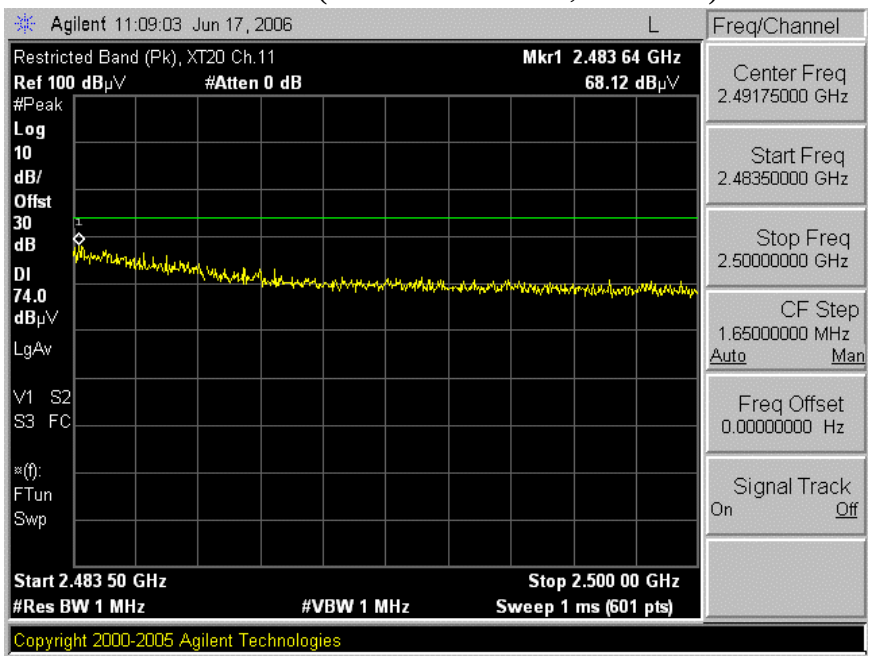

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT20, Horizontal)

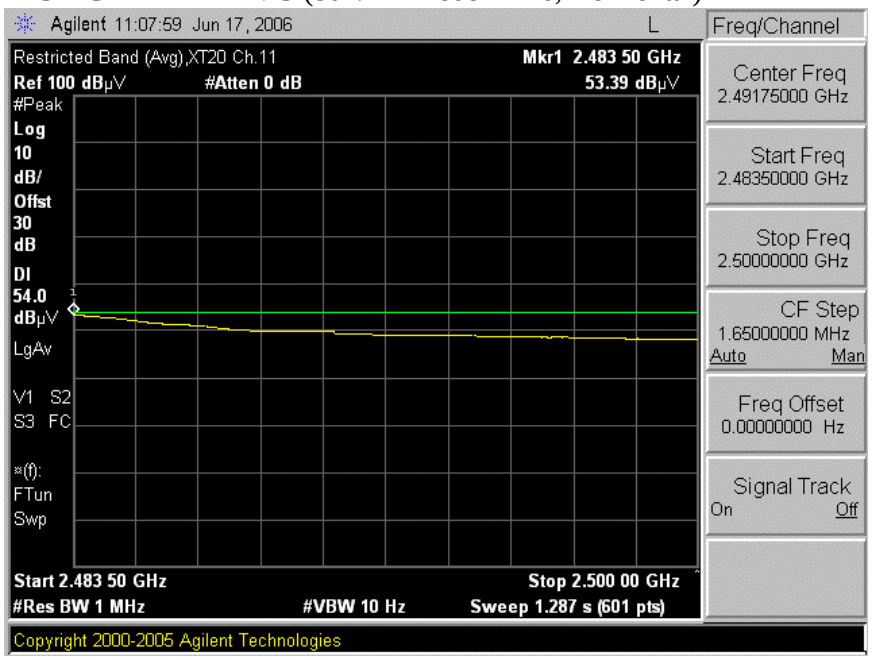

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11n mode HT20, Vertical)

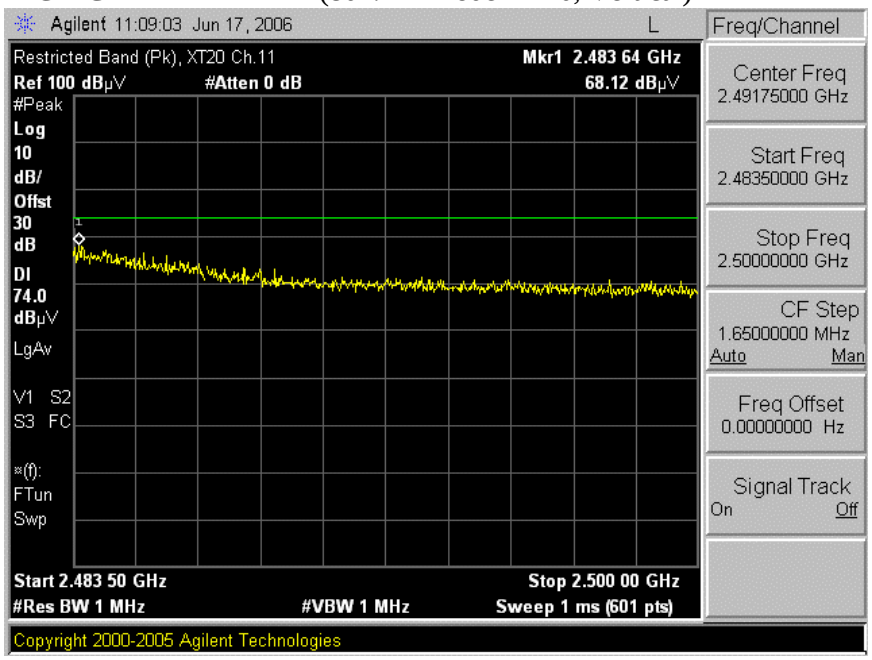

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT20, Vertical)

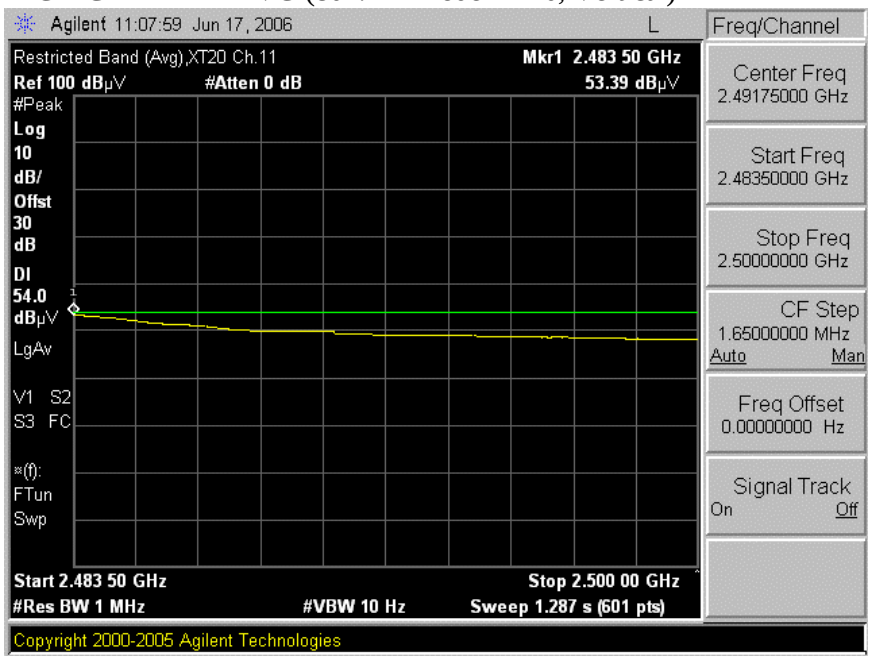

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/11/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in HT 20M mode, MCS11, w/Duck Antenna
EUT S/N: 010

Test Equipment:

Horn 1-18GHz: T136; M/N: 3117 @3m
Pre-amplifer 1-26GHz: T87 Miteq 924342
Pre-amplifer 26-40GHz:
Horn > 18GHz: T89; ARA 18-26GHz; S/N:1049
2 foot cable:
3 foot cable: Frank 177080001
12 foot cable: Frank 187209001
HPF:
Reject Filter: R_001

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2412 MHz)															
4.824	3.0	54.33	40.04	33.7	4.0	-45.3	0.0	0.0	46.7	32.4	74	54	-27.3	-21.6	V, PowerSetting 60 60
4.824	3.0	51.50	38.90	33.7	4.0	-45.3	0.0	0.0	43.9	31.3	74	54	-30.1	-22.7	H, PowerSetting 60 60
Mid Channel (2437 MHz)															
4.874	3.0	65.10	51.90	33.7	4.0	-45.3	0.0	0.0	57.5	44.3	74	54	-16.5	-9.7	V, PowerSetting 64 65
7.311	3.0	58.36	45.90	35.2	4.6	-43.2	0.0	0.0	55.0	42.5	74	54	-19.0	-11.5	V, PowerSetting 64 65
4.874	3.0	52.02	39.50	33.7	4.0	-45.3	0.0	0.0	44.4	31.9	74	54	-29.6	-22.1	H, PowerSetting 64 65
7.311	3.0	51.50	38.70	35.2	4.6	-43.2	0.0	0.0	48.1	35.3	74	54	-25.9	-18.7	H, PowerSetting 64 65
High Channel (2462 MHz)															
4.924	3.0	53.30	42.00	33.8	4.0	-45.4	0.0	0.0	45.7	34.4	74	54	-28.3	-19.6	V, PowerSetting 16dBm
7.386	3.0	51.20	40.10	35.3	4.6	-43.1	0.0	0.0	48.0	36.9	74	54	-26.0	-17.1	V, PowerSetting 16dBm
4.924	3.0	53.60	41.50	33.8	4.0	-45.4	0.0	0.0	46.0	33.9	74	54	-28.0	-20.1	H, PowerSetting 16dBm
7.386	3.0	52.10	39.20	35.3	4.6	-43.1	0.0	0.0	48.9	36.0	74	54	-25.1	-18.0	H, PowerSetting 16dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)

LOW CHANNEL PEAK (802.11n mode HT40, Horizontal)

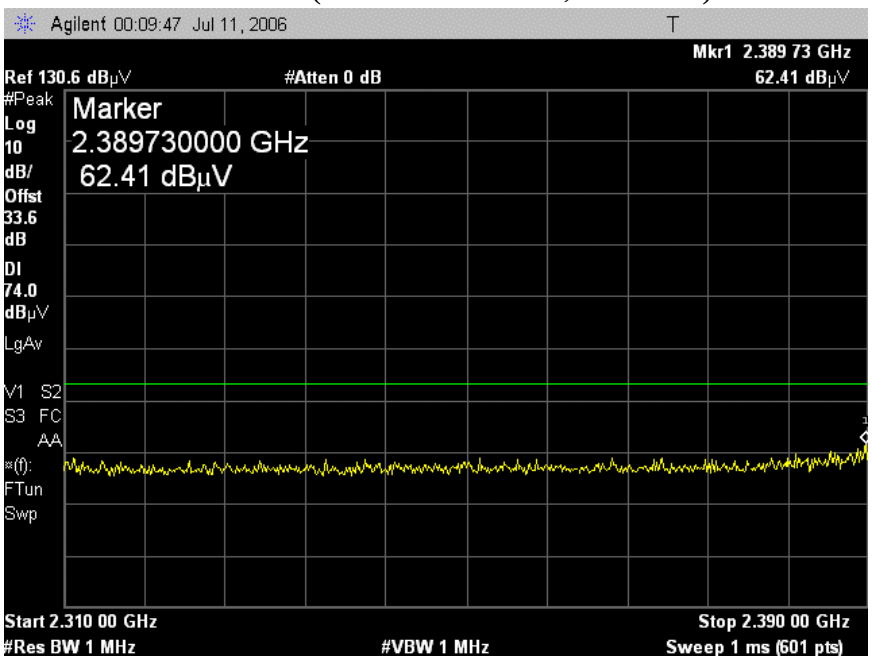

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT40, Horizontal)

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL PEAK (802.11n mode H40, Vertical)

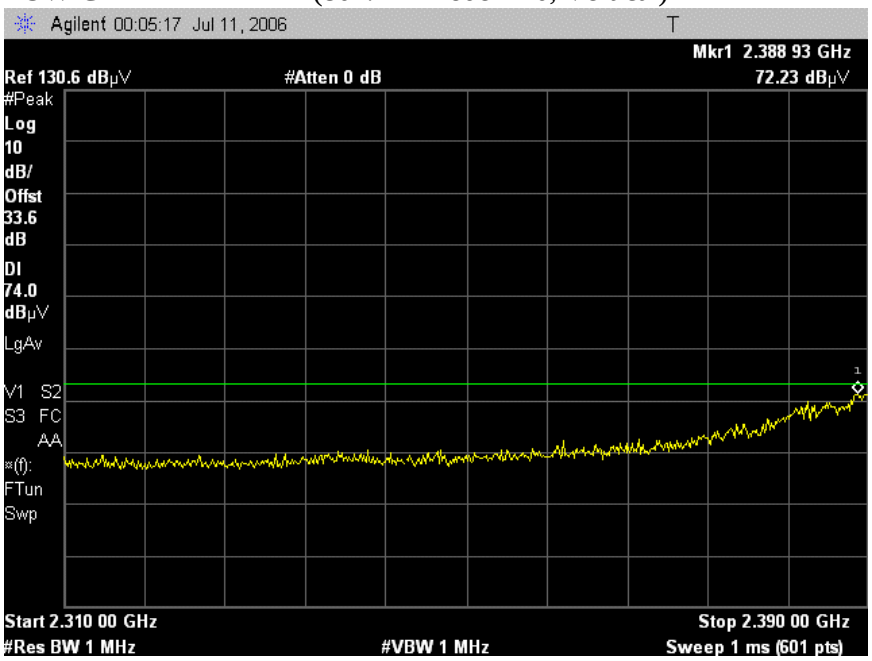

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CHANNEL AVG (802.11n mode HT40, Vertical)

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)

HIGH CHANNEL PEAK (802.11n mode HT40, Horizontal)

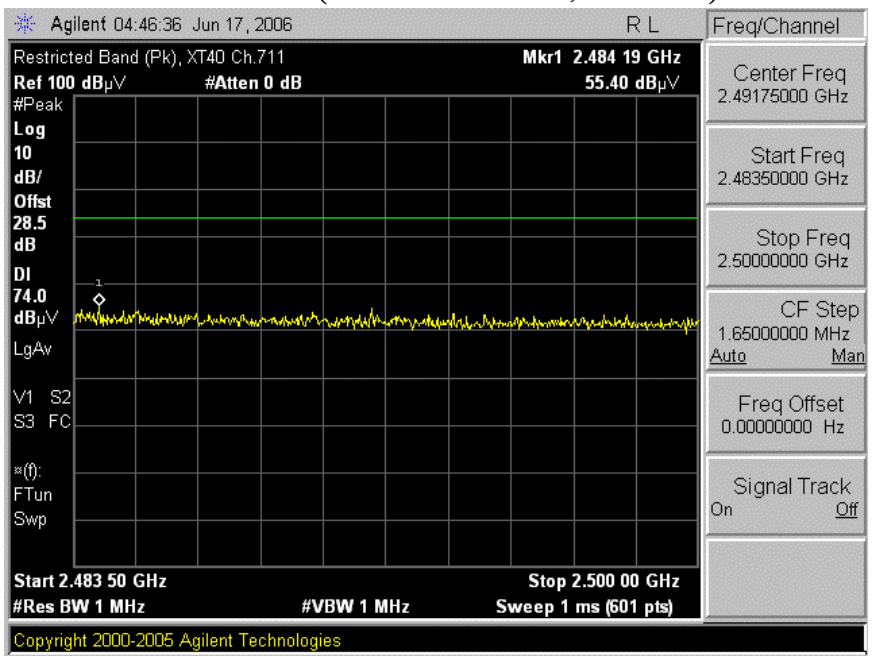

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT40, Horizontal)

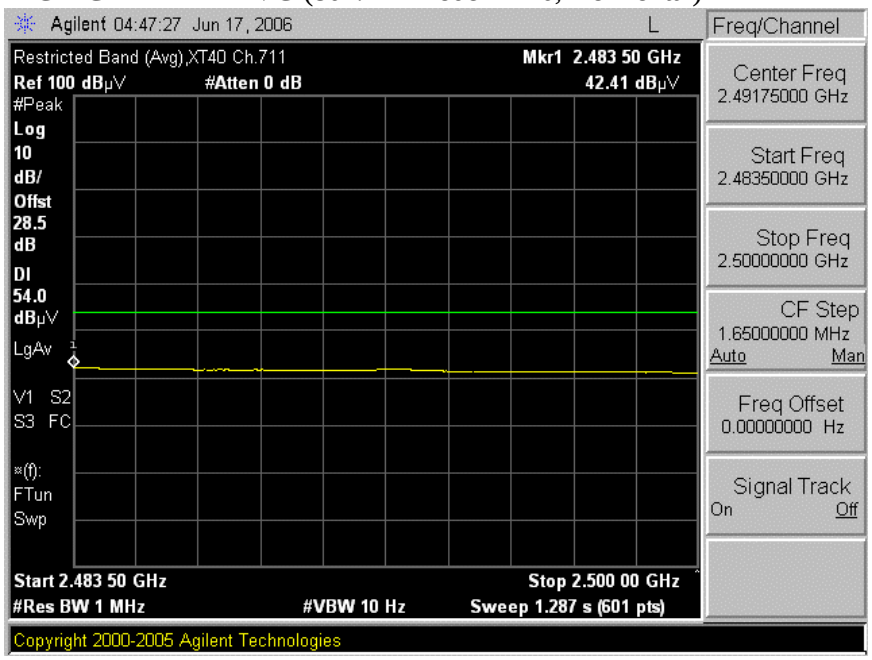

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL PEAK (802.11n mode HT40, Vertical)

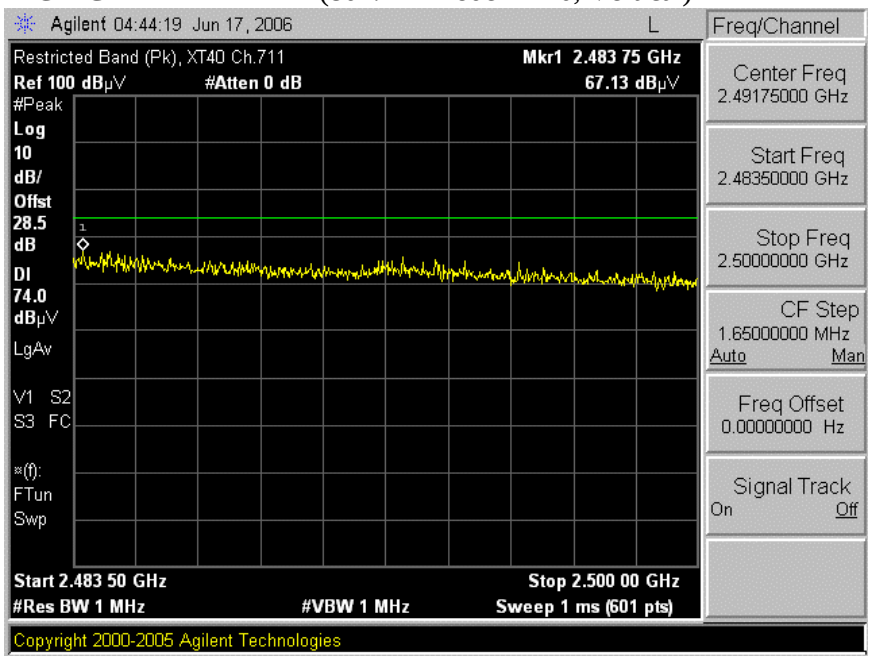

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CHANNEL AVG (802.11n mode HT40, Vertical)

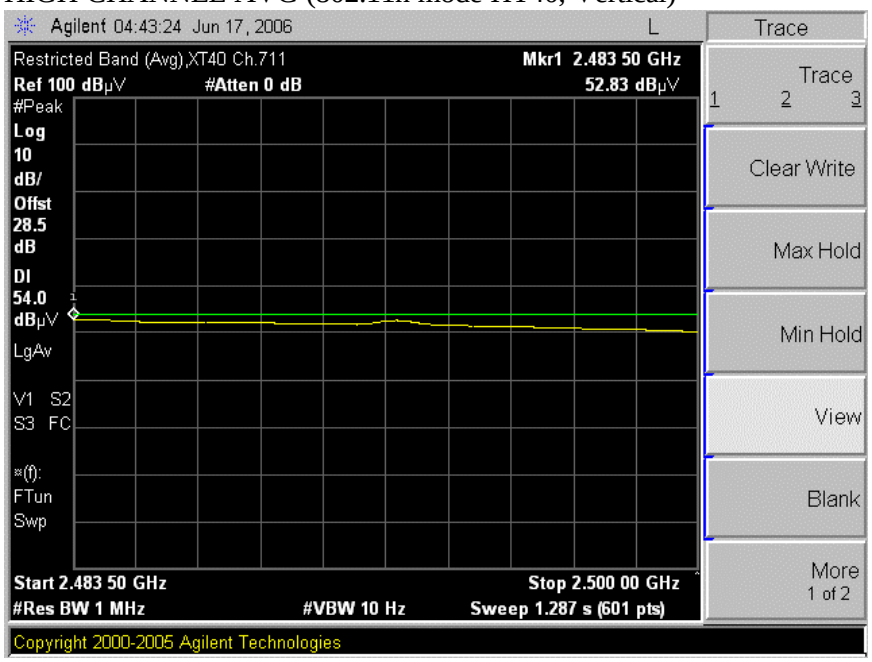

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: MARVELL SEMICONDUCTOR INC.
Project #: 06U10359
Date: 07/11/06
Test Engineer: Frank Ibrahim
Configuration: EUT , Extender card, Support Laptop.
Mode: Continuously Transmitting in HT 40M mode, MCS15, w/Duck Antenna
EUT S/N: 010

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T136; M/N: 3117 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001		R_001

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2422 MHz)															
4.844	3.0	54.92	40.78	33.7	4.0	-45.3	0.0	0.0	47.3	33.2	74	54	-26.7	-20.8	V, PowerSetting 62 63
7.266	3.0	52.48	40.46	35.2	4.6	-43.3	0.0	0.0	49.0	37.0	74	54	-25.0	-17.0	V, PowerSetting 62 63
4.844	3.0	51.60	39.60	33.7	4.0	-45.3	0.0	0.0	44.0	32.0	74	54	-30.0	-22.0	H, PowerSetting 62 63
7.266	3.0	50.70	38.90	35.2	4.6	-43.3	0.0	0.0	47.2	35.4	74	54	-26.8	-18.6	H, PowerSetting 62 63
Mid Channel (2437 MHz)															
4.874	3.0	54.00	40.00	33.7	4.0	-45.3	0.0	0.0	46.4	32.4	74	54	-27.6	-21.6	V, PowerSetting 17dBm
7.311	3.0	51.10	38.20	35.2	4.6	-43.2	0.0	0.0	47.7	34.8	74	54	-26.3	-19.2	V, PowerSetting 17dBm
4.874	3.0	52.50	40.10	33.7	4.0	-45.3	0.0	0.0	44.9	32.5	74	54	-29.1	-21.5	H, PowerSetting 17dBm
7.311	3.0	51.10	39.40	35.2	4.6	-43.2	0.0	0.0	47.7	36.0	74	54	-26.3	-18.0	H, PowerSetting 17dBm
High Channel (2452 MHz)															
4.904	3.0	54.30	42.20	33.8	4.0	-45.3	0.0	0.0	46.7	34.6	74	54	-27.3	-19.4	V, PowerSetting 15dBm
7.356	3.0	52.20	40.20	35.3	4.6	-43.1	0.0	0.0	48.9	36.9	74	54	-25.1	-17.1	V, PowerSetting 15dBm
4.904	3.0	53.30	41.30	33.8	4.0	-45.3	0.0	0.0	45.7	33.7	74	54	-28.3	-20.3	H, PowerSetting 15dBm
7.356	3.0	51.10	39.30	35.3	4.6	-43.1	0.0	0.0	47.8	36.0	74	54	-26.2	-18.0	H, PowerSetting 15dBm

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

This report shall not be reproduced except in full, without the written approval of CCS.

7.3.4. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

Foxconn Antenna

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/24/06
Test Engineer: Frank Ibrahim
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in 11a mode, 20 MHz BW

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T119; S/N: 29301 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001	HPF_7.6GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5745 MHz)															
11.490	3.0	60.9	48.1	37.2	5.2	-39.8	0.0	0.7	64.2	51.5	74	54	-9.8	-2.5	V, Settings 6F 6C
11.490	3.0	57.2	45.5	37.2	5.2	-39.8	0.0	0.7	60.5	48.9	74	54	-13.5	-5.1	H, Settings 6F 6C
Middle Channel (5785 MHz)															
11.570	3.0	57.2	44.2	37.2	5.2	-39.8	0.0	0.7	60.5	47.5	74	54	-13.5	-6.5	V, Settings 6E 6D
11.570	3.0	57.3	44.5	37.2	5.2	-39.8	0.0	0.7	60.6	47.8	74	54	-13.4	-6.2	H, Settings 6E 6D
High Channel (5825 MHz)															
11.650	3.0	56.6	43.1	37.2	5.3	-39.8	0.0	0.7	60.0	46.4	74	54	-14.0	-7.6	V, Settings 70 6D
11.650	3.0	54.3	42.1	37.2	5.3	-39.8	0.0	0.7	57.6	45.5	74	54	-16.4	-8.5	H, Settings 70 6D

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11a 40MHz MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/24/06
Test Engineer: Frank Ibrahim
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in 11a mode, 40 MHz BW

Test Equipment:

Horn 1-18GHz: T119; S/N: 29301 @3m
Pre-amplifer 1-26GHz: T87 Miteq 924342
Pre-amplifer 26-40GHz:
Horn > 18GHz: T89; ARA 18-26GHz; S/N:1049
2 foot cable:
3 foot cable: Frank 177080001
12 foot cable: Frank 187209001
HPF: HPF_7.6GHz
Reject Filter:

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5755 MHz)															
11.510	3.0	52.1	40.6	37.2	5.2	-39.8	0.0	0.7	55.4	43.9	74	54	-18.6	-10.1	V, Settings 65 66
11.510	3.0	52.7	41.6	37.2	5.2	-39.8	0.0	0.7	56.0	44.9	74	54	-18.0	-9.1	H, Settings 65 66
High Channel (5795 MHz)															
11.590	3.0	57.0	45.2	37.2	5.2	-39.8	0.0	0.7	60.3	48.5	74	54	-13.7	-5.5	V, Settings 76 70
11.590	3.0	58.7	45.5	37.2	5.2	-39.8	0.0	0.7	62.0	48.8	74	54	-12.0	-5.2	H, Settings 76 70

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/24/06
Test Engineer: Frank Ibrahim
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in HT mode, 20 MHz BW

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T119; S/N: 29301 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Frank 177080001	Frank 187209001	HPF_7.6GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5745 MHz)															
11.490	3.0	60.5	47.1	37.2	5.2	-39.8	0.0	0.7	63.8	50.4	74	54	-10.2	-3.6	V, Settings 6F 6B
11.490	3.0	58.8	45.5	37.2	5.2	-39.8	0.0	0.7	62.1	48.8	74	54	-11.9	-5.2	H, Settings 6F 6B
Middle Channel (5785 MHz)															
11.570	3.0	56.8	44.8	37.2	5.2	-39.8	0.0	0.7	60.2	48.2	74	54	-13.8	-5.8	V, Settings 6E 6C
11.570	3.0	56.7	44.5	37.2	5.2	-39.8	0.0	0.7	60.1	47.8	74	54	-13.9	-6.2	H, Settings 6E 6C
High Channel (5825 MHz)															
11.650	3.0	57.1	44.2	37.2	5.3	-39.8	0.0	0.7	60.4	47.6	74	54	-13.6	-6.4	V, Settings 6F 6C
11.650	3.0	54.1	42.3	37.2	5.3	-39.8	0.0	0.7	57.4	45.6	74	54	-16.6	-8.4	H, Settings 6F 6C

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/24/06
Test Engineer: Frank Ibrahim
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in HT mode, 40 MHz BW

Test Equipment:

Horn 1-18GHz: T119; S/N: 29301 @3m
Pre-amplifer 1-26GHz: T87 Miteq 924342
Pre-amplifer 26-40GHz:
Horn > 18GHz: T89; ARA 18-26GHz; S/N:1049
2 foot cable:
3 foot cable: Frank 177080001
12 foot cable: Frank 187209001
HPF: HPF_7.6GHz
Reject Filter:

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5755 MHz)															
11.510	3.0	52.4	40.2	37.2	5.2	-39.8	0.0	0.7	55.7	43.6	74	54	-18.3	-10.4	V, Settings 68 68
11.510	3.0	52.8	41.0	37.2	5.2	-39.8	0.0	0.7	56.1	44.3	74	54	-17.9	-9.7	H, Settings 68 68
High Channel (5795 MHz)															
11.590	3.0	56.7	44.7	37.2	5.2	-39.8	0.0	0.7	60.0	48.0	74	54	-14.0	-6.0	V, Settings 71 6D
11.590	3.0	57.4	45.6	37.2	5.2	-39.8	0.0	0.7	60.7	48.9	74	54	-13.3	-5.1	H, Settings 71 6D

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

7.3.5. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

Duck Antenna

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/26/06
Test Engineer: Thanh Nguyen
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in 11a mode, 20 MHz BW

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T119; S/N: 29301 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
Thanh 177079008		Thanh 208946003	HPF_7.6GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5745 MHz)															
11.490	3.0	57.3	46.1	37.2	4.2	-39.8	0.0	0.7	59.6	48.4	74	54	-14.4	-5.6	V, Settings 6F 6C
11.490	3.0	57.2	45.5	37.2	4.2	-39.8	0.0	0.7	59.5	47.8	74	54	-14.5	-6.2	H, Settings 6F 6C
Middle Channel (5785 MHz)															
11.570	3.0	57.2	44.2	37.2	4.2	-39.8	0.0	0.7	59.5	46.5	74	54	-14.5	-7.5	V, Settings 6E 6D
11.570	3.0	57.3	44.5	37.2	4.2	-39.8	0.0	0.7	59.6	46.8	74	54	-14.4	-7.2	H, Settings 6E 6D
High Channel (5825 MHz)															
11.650	3.0	56.6	43.1	37.2	4.2	-39.8	0.0	0.7	58.9	45.4	74	54	-15.1	-8.6	V, Settings 70 6D
11.650	3.0	54.3	42.1	37.2	4.2	-39.8	0.0	0.7	56.6	44.4	74	54	-17.4	-9.6	H, Settings 70 6D

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11a 40MHz MODE)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/26/06
Test Engineer: Thanh Nguyen
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in 11a mode, 40 MHz BW

Test Equipment:

Horn 1-18GHz: T119; S/N: 29301 @3m
Pre-amplifer 1-26GHz: T87 Miteq 924342
Pre-amplifer 26-40GHz: -
Horn > 18GHz: T89; ARA 18-26GHz; S/N:1049

2 foot cable: Thanh 177079008
3 foot cable: -
12 foot cable: Thanh 208946003
HPF: HPF_7.6GHz
Reject Filter: -

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5755 MHz)															
11.510	3.0	58.8	47.5	37.2	4.2	-39.8	0.0	0.7	61.1	49.8	74	54	-12.9	-4.2	V, Settings 65 66
11.510	3.0	58.0	44.4	37.2	4.2	-39.8	0.0	0.7	60.3	46.7	74	54	-13.7	-7.3	H, Settings 65 66
High Channel (5795 MHz)															
11.590	3.0	54.7	42.3	37.2	4.2	-39.8	0.0	0.7	57.0	44.6	74	54	-17.0	-9.4	V, Settings 76 70
11.590	3.0	57.8	46.2	37.2	4.2	-39.8	0.0	0.7	60.1	48.5	74	54	-13.9	-5.5	H, Settings 76 70

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/26/06
Test Engineer: Thanh Nguyen
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in HT mode, 20 MHz BW

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz
T119; S/N: 29301 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
Thanh 177079008		Thanh 208946003	HPF_7.6GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5745 MHz)															
11.490	3.0	57.6	45.3	37.2	4.2	-39.8	0.0	0.7	59.9	47.6	74	54	-14.1	-6.4	V, Settings 6F 6B
11.490	3.0	53.5	40.5	37.2	4.2	-39.8	0.0	0.7	55.7	42.8	74	54	-18.3	-11.2	H, Settings 6F 6B
Middle Channel (5785 MHz)															
11.570	3.0	56.2	42.9	37.2	4.2	-39.8	0.0	0.7	58.5	45.2	74	54	-15.5	-8.8	V, Settings 6E 6C
11.570	3.0	52.1	40.1	37.2	4.2	-39.8	0.0	0.7	54.4	42.4	74	54	-19.6	-11.6	H, Settings 6E 6C
High Channel (5825 MHz)															
11.650	3.0	56.4	42.3	37.2	4.2	-39.8	0.0	0.7	58.7	44.6	74	54	-15.3	-9.4	V, Settings 6F 6C
11.650	3.0	50.5	38.3	37.2	4.2	-39.8	0.0	0.7	52.8	40.6	74	54	-21.2	-13.4	H, Settings 6F 6C

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell
Project #: 06U10359
Date: 06/26/06
Test Engineer: Thanh Nguyen
Configuration: EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)
S/N: 099 (Modified EUT)
Mode: TX ON in HT40 mode, 40 MHz BW

Test Equipment:

Horn 1-18GHz: T119; S/N: 29301 @3m
Pre-amplifer 1-26GHz: T87 Miteq 924342
Pre-amplifer 26-40GHz:
Horn > 18GHz: T89; ARA 18-26GHz; S/N:1049

2 foot cable: Thanh 177079008
3 foot cable:
12 foot cable: Thanh 208946003
HPF: HPF_7.6GHz
Reject Filter:

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5755 MHz)															
11.510	3.0	54.0	43.0	37.2	4.2	-39.8	0.0	0.7	56.3	45.3	74	54	-17.7	-8.7	V, Settings 68 68
11.510	3.0	49.6	38.7	37.2	4.2	-39.8	0.0	0.7	51.9	41.0	74	54	-22.1	-13.0	H, Settings 68 68
High Channel (5795 MHz)															
11.590	3.0	52.3	41.9	37.2	4.2	-39.8	0.0	0.7	54.6	44.2	74	54	-19.4	-9.8	V, Settings 71 6D
11.590	3.0	55.7	44.1	37.2	4.2	-39.8	0.0	0.7	58.0	46.4	74	54	-16.0	-7.6	H, Settings 71 6D

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

This report shall not be reproduced except in full, without the written approval of CCS.

7.3.6. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 7 File#: new.EMI Date: 06-22-2006 Time: 19:22:48
Audix ATC

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Thanh Nguyen
Company: : Marvell Semiconductor
Project #: : 06U10359
Model: : MC85
Configuration: : EUT,Extender card, Laptop .
Mode of Operation: Tx Worst case

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	90.140	21.21	8.79	30.00	43.50	-13.50	Peak
2	135.730	20.64	14.96	35.60	43.50	-7.90	Peak
3	324.880	16.93	16.28	33.21	46.00	-12.79	Peak
4	509.180	15.75	20.36	36.11	46.00	-9.89	Peak
5	727.430	12.38	23.53	35.91	46.00	-10.09	Peak

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 5 File#: new.EMI Date: 06-22-2006 Time: 18:52:34
Audix ATC

Condition: FCC CLASS-B VERTICAL
Test Operator: : Thanh Nguyen
Company: : Marvell Semiconductor
Project #: : 06U10359
Model: : MC85
Configuration: : EUT,Extender card, Laptop .
Mode of Operation: Tx Worst case

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	167.740	17.00	13.51	30.51	43.50	-12.99	Peak
2	221.090	17.62	12.67	30.29	46.00	-15.71	Peak
3	269.590	16.54	14.61	31.15	46.00	-14.85	Peak
4	340.400	15.22	16.64	31.86	46.00	-14.14	Peak
5	470.380	12.87	19.65	32.52	46.00	-13.48	Peak

This report shall not be reproduced except in full, without the written approval of CCS.

7.4. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

This report shall not be reproduced except in full, without the written approval of CCS.

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.20	52.04	--	40.35	0.00	63.53	53.53	-11.49	-13.18	L1
0.54	36.96	--	27.80	0.00	56.00	46.00	-19.04	-18.20	L1
3.53	34.56	--	--	0.00	56.00	46.00	-21.44	-11.44	L1
0.20	48.92	--	37.32	0.00	63.57	53.57	-14.65	-16.25	L2
0.55	34.64	--	27.67	0.00	56.00	46.00	-21.36	-18.33	L2
5.14	36.28	--	--	0.00	60.00	50.00	-23.72	-13.72	L2
6 Worst Data									

This report shall not be reproduced except in full, without the written approval of CCS.

LINE 1 RESULTS

Compliance Certification Services
561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 7 File#: 359_2.4GHz.EMI Date: 06-21-2006 Time: 09:24:32

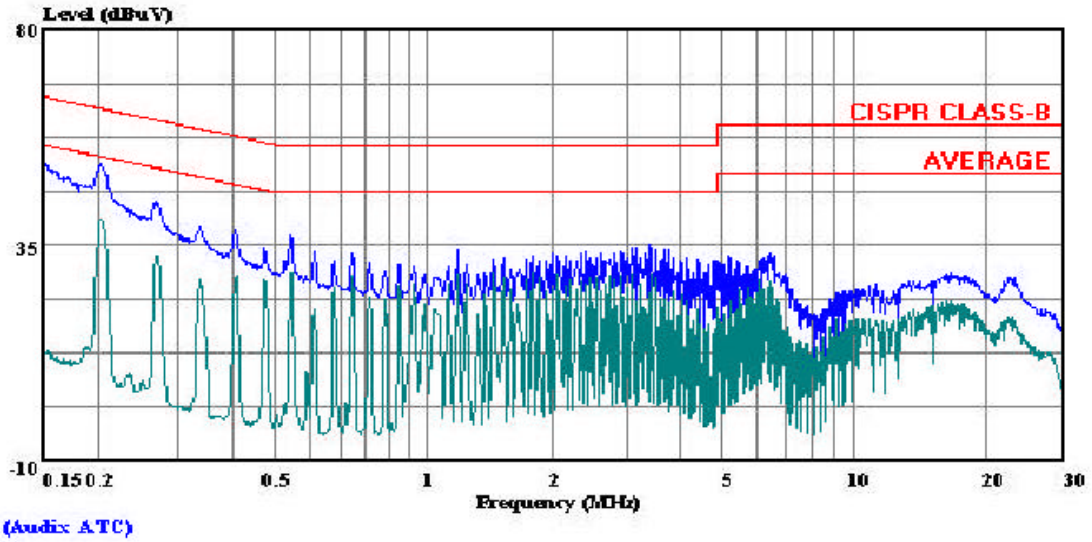

Trace: 5 Ref Trace:

Condition: CISPR CLASS-B
Test Operator : Thanh Nguyen
Project # : 06U10359
Company : Marvell Semiconductor Inc
EUT configuration: EUT, extender card, laptop
EUT mode : Continous Tx worst case
Power Source : 115 VAC, 60 Hz
: Line 1: Peak:(Black), Average:(Green)

This report shall not be reproduced except in full, without the written approval of CCS.

LINE 2 RESULTS

Compliance Certification Services
561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 14 File#: 359_2.4GHz.EMI Date: 06-21-2006 Time: 09:54:03

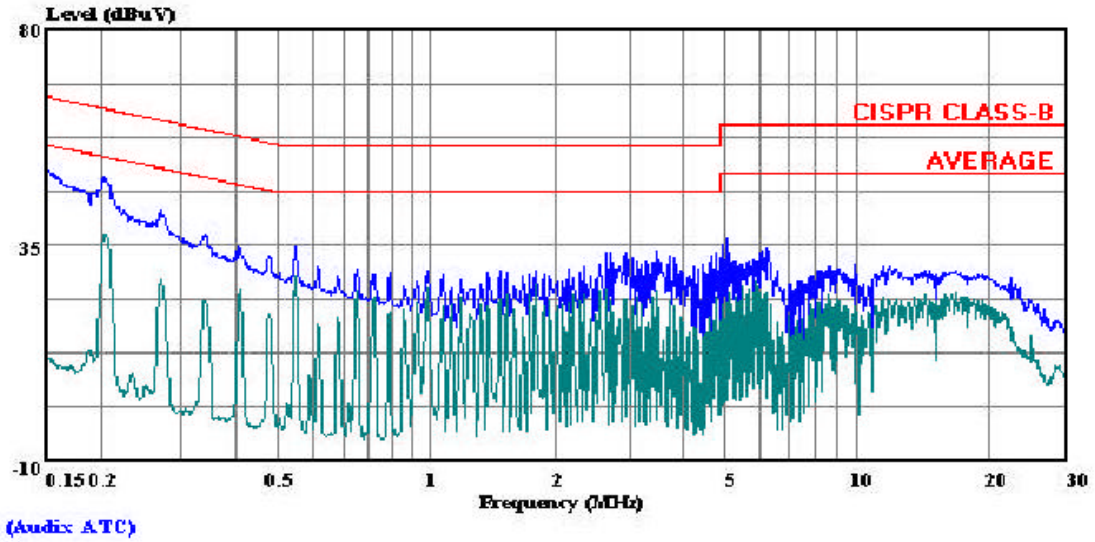

Trace: 12 Ref Trace:

Condition: CISPR CLASS-B
Test Operator : Thanh Nguyen
Project # : 06U10359
Company : Marvell Semiconductor Inc
EUT configuration: EUT, extender card, laptop
EUT mode : Continous Tx worst case
Power Source : 115 VAC, 60 Hz
: Line 2: Peak:(Black), Average:(Green)

This report shall not be reproduced except in full, without the written approval of CCS.