



**FCC CFR47 PART 15 SUBPART E
CERTIFICATION
TEST REPORT**

FOR

MC85 MINI CARD 11b/g/a/n RADIO CARD

MODEL NUMBER: MC85

FCC ID: UAY-MMC85M

REPORT NUMBER: 06U10359-2D

ISSUE DATE: JULY 18, 2006

Prepared for
MARVELL SEMICONDUCTOR, INC.
5488 MARVELL LANE
SANTA CLARA
CALIFORNIA, 95054, USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	7/12/2006	Initial Release	A. Ilarina
B	7/15/2006	- Correct Section 5.2 to be consistent with EWC Specification - Add antenna gain information for 5.2GHz band in Section 5.3. - Clarify description of baseline testing for worst case in Section 5.5. - Updated table and plots section 7.1.1 - Updated table and plots Section 7.1.2 - Updated table Section 7.1.3 - Updated table section 5.2	A. Ilarina
C	7/17/2006	- Change test report title to Part 15 Subpart E. - Update antenna gain information in Section 5.3. - Updated table and plots section 7.1.2 - Updated table section 5.2	A. Ilarina
D	7/18/2006	- Updated section 7.2.2 - Updated section 7.2.3 - Add Frequency Stability Section 7.3	A. Ilarina

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY.....	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. SOFTWARE AND FIRMWARE.....	7
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. MODIFICATIONS.....	7
5.7. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT.....	10
7. LIMITS AND RESULTS.....	11
7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND.....	11
7.1.1. 99% BANDWIDTH AND 26 dB BANDWIDTH.....	11
7.1.2. MAXIMUM POWER.....	37
7.1.3. AVERAGE POWER	63
7.1.4. PEAK POWER SPECTRAL DENSITY	65
7.1.5. PEAK EXCURSION.....	104
7.1.6. CONDUCTED SPURIOUS EMISSIONS.....	130
7.1.7. MAXIMUM PERMISSIBLE EXPOSURE	167
7.2. RADIATED EMISSIONS	170
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	170
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 5150 TO 5350 MHz BAND-Foxconn.....	173
7.2.3. TRANSMITTER ABOVE 1 GHz FOR 5150 TO 5350 MHz BAND- Duck.....	212
7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	251
7.3. FREQUENCY STABILITY.....	253
7.4. POWERLINE CONDUCTED EMISSIONS	254
8. SETUP PHOTOS.....	258

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MARVELL SEMICONDUCTOR, INC.
5488 MARVELL LANE
SANTA CLARA, CA, 95054, USA

EUT DESCRIPTION: MC85 MINI CARD 802.11b/g/a/n RADIO CARD

MODEL: MC85

SERIAL NUMBER: 099; 098; 10

DATE TESTED: JUNE 12-30, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART E	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



ALVIN ILARINA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



FRANK IBRAHIM
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n transceiver.

The radio module is manufactured by Marvell Semiconductor

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
--------------------------	------	-----------------------	----------------------

5150 to 5250 MHz Authorized Band

5180 - 5240	802.11a 20MHz	11.32	13.55
5190 - 5230	802.11a 40MHz	14.93	31.12
5180 - 5240	802.11n HT20	13.53	22.54
5190 - 5230	802.11n HT40	15.90	38.90

5250 to 5350 MHz Authorized Band

5260 - 5320	802.11a 20MHz	17.19	52.36
5270 - 5310	802.11a 40MHz	16.60	45.71
5260 - 5320	802.11n HT20	19.75	94.41
5270 - 5310	802.11n HT40	17.51	56.36

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two antennas for diversity:

- 1) Foxconn Model 820-2032 with a maximum gain of 6.2 dBi @ 5.3GHz band and 4.3 dBi @ 5.15GHz.
- 2) Mega Chip Model QRANTDPLWPS008, Dipole, with a maximum gain of 5.46 dBi @ 5.35 GHz and 2.78 dBi @ 5.15 GHz.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was PCI rev. 1.0.0.0.2, MFG 2.1.0.36

The EUT driver software installed in the Laptop during testing was Marvell Semiconductor, Inc. Labtools rev. 1.0.3.p3.

The board revision of the EUT tested is 1.8.

The test utility software used during testing was PCI.exe.

5.5. WORST-CASE CONFIGURATION AND MODE

The 2x3 configuration was used for all testing in this report.

The worst- case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates for the 2GHz bands are: 11 Mbps for 802.11b; 54Mbps for 802.11g; MCS11 for 802.11n HT20; MCS15 for 802.11n HT40. These are based on baseline testing with this chipset.

The worst-case data rates for the 5GHz bands are: 9 Mbps for 802.11a 20MHz and 802.11a 40MHz; MCS0 for 802.11n HT20 and 802.11n HT40. These are based on baseline testing with this chipset.

All emissions tests were made with the worst-case data rates.

5.6. MODIFICATIONS

There were no modifications made to the revision EUT during the testing.

5.7. DESCRIPTION OF TEST SETUP


SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	IBM	ThinkPad T60	L3-M5371	DoC
Extend PCB	Marvell	N/A	02V20806	N/A

TEST SETUP

The EUT is installed in a host laptop computer via an extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

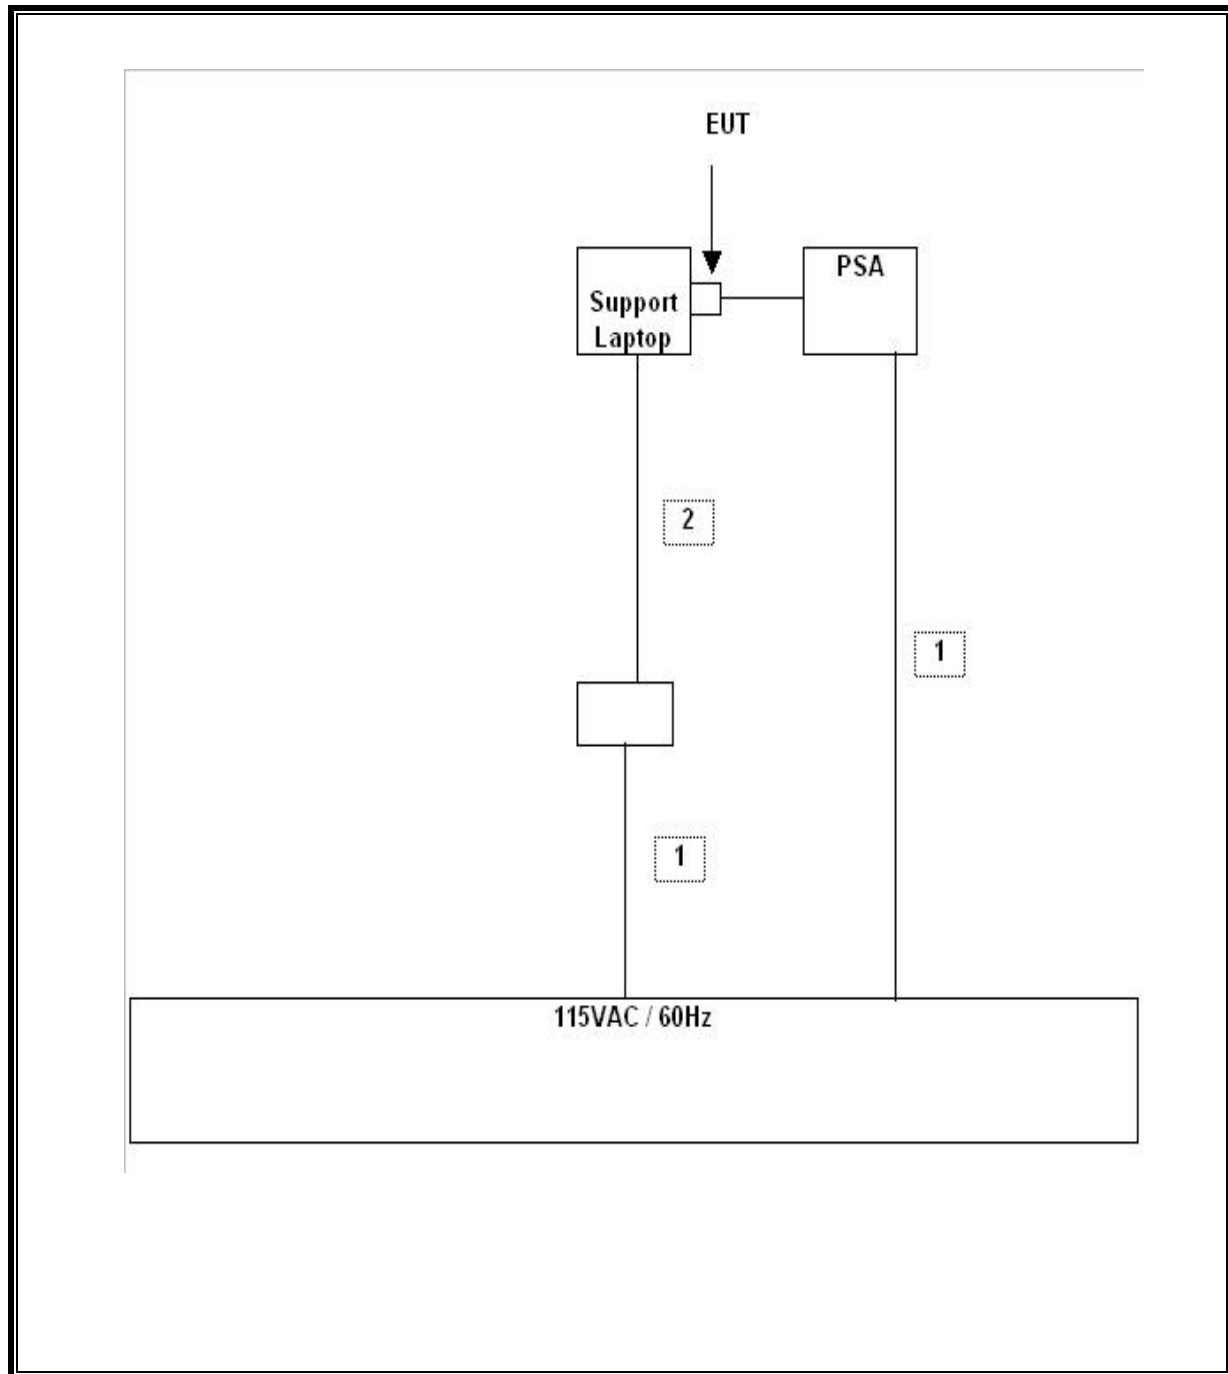

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2005
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/2005
Spectrum Analyzer	HP	E4446A	US42510266	8/25/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	9/12/2005
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2005
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	29800	5/13/2005
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/2004
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/2004
4.0 High Pass Filter	Micro Tronics	HPM13351	3	N/A

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 5150 TO 5350 MHz BAND

7.1.1. 99% BANDWIDTH AND 26 dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth and 26 dB bandwidth functions are utilized.

RESULTS

No non-compliance noted:

Mode Channel	Frequency (MHz)	99% BW Chain A (MHz)	99% BW Chain B (MHz)	26 dB BW Chain A (MHz)	26 dB BW Chain B (MHz)	Worst Case 10 Log B (dB)
--------------	-----------------	----------------------	----------------------	------------------------	------------------------	--------------------------

802.11a 20 MHz Mode

Low	5180	16.5056	16.4909	19.697	19.418	12.94
Middle	5260	16.5350	16.5443	19.746	19.663	12.95
High	5320	16.5441	16.5383	19.935	19.797	13.00

802.11a 40MHz Mode

Low	5180	36.6855	36.6412	39.116	39.232	15.94
Middle	5260	36.7149	36.7529	41.083	47.067	16.73
High	5320	36.6629	36.6069	39.002	38.883	15.91


802.11n HT20 Mode


Low	5180	17.7277	17.6875	19.780	19.713	12.96
Mid	5260	17.8371	17.8382	28.048	29.881	14.75
High	5320	17.7529	17.7364	20.169	20.064	13.05


802.11n HT40 Mode

Low	5190	36.5344	36.5067	38.874	38.937	15.90
Mid	5260	36.5609	36.6182	38.931	40.256	16.05
High	5310	36.5351	36.5120	38.904	39.184	15.93


(802.11a 20M MODE CHAIN A)

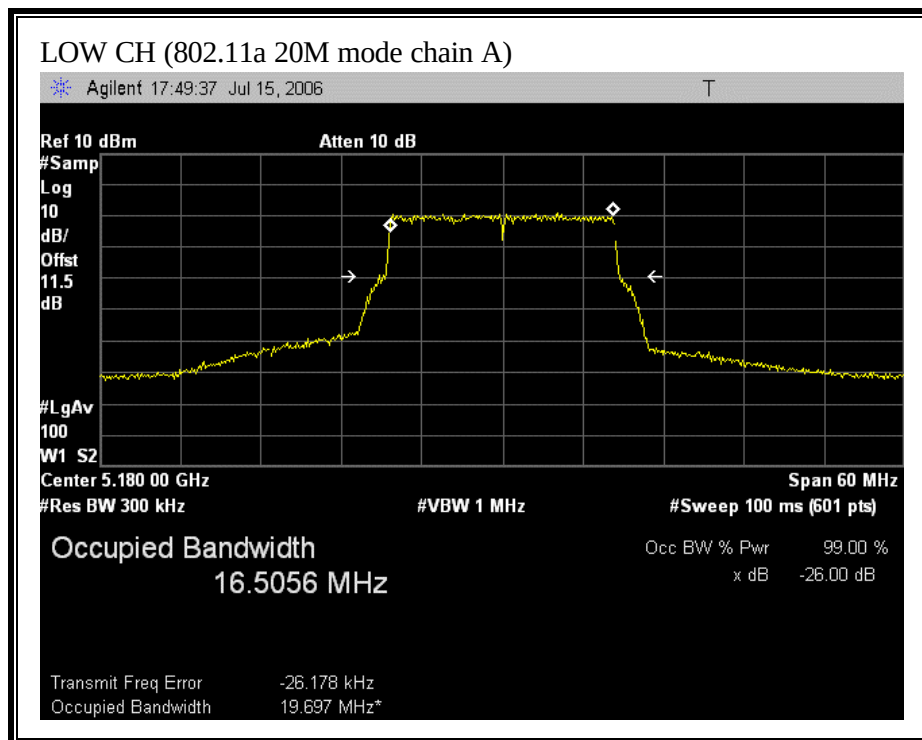


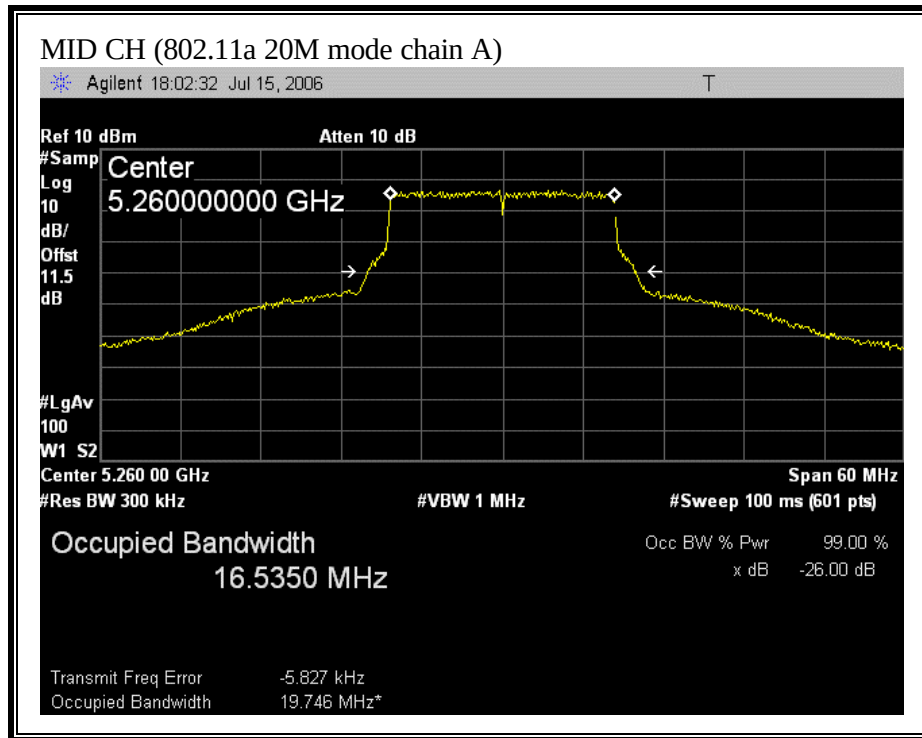


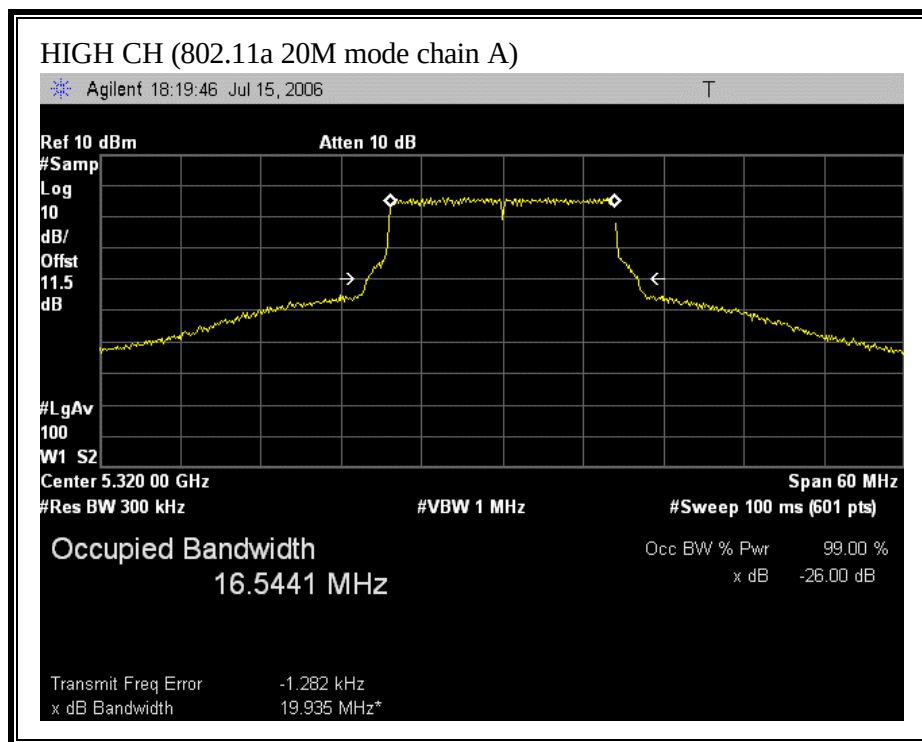


(802.11a 20M MODE CHAIN B)

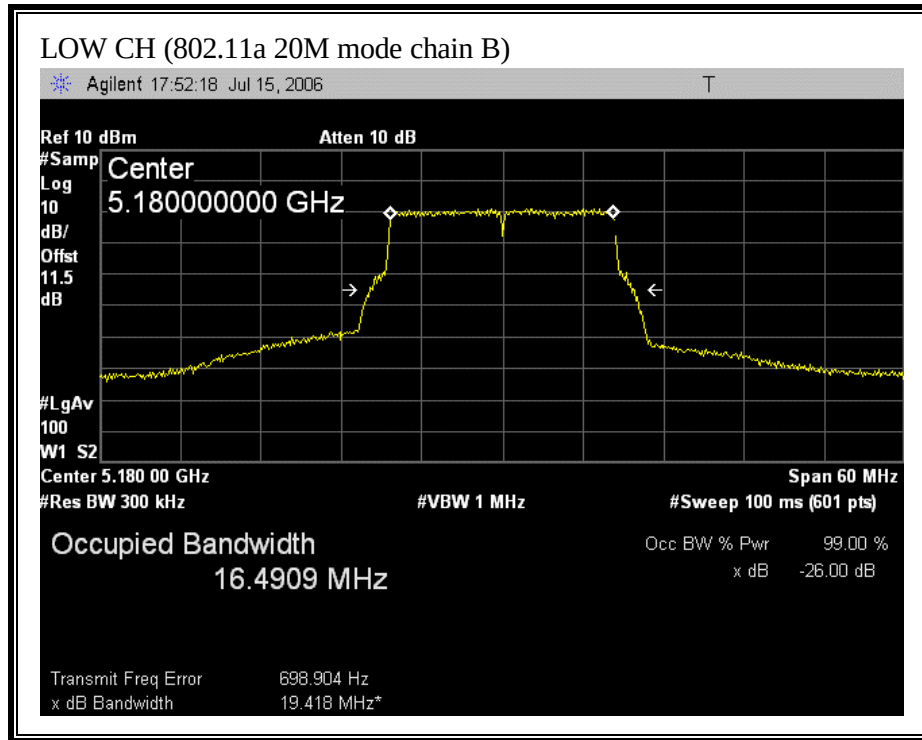


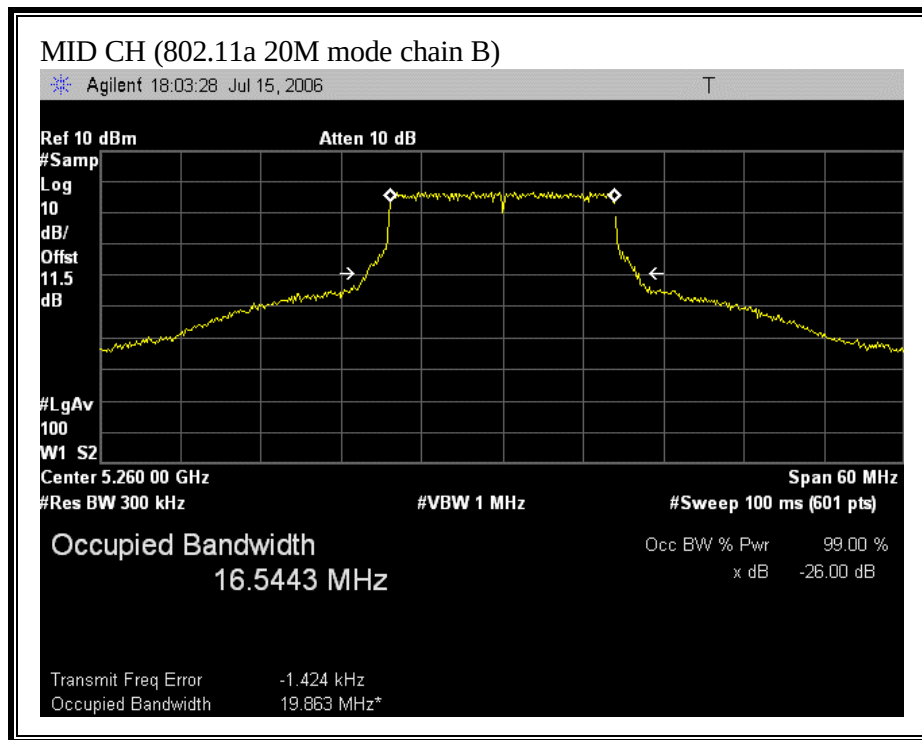


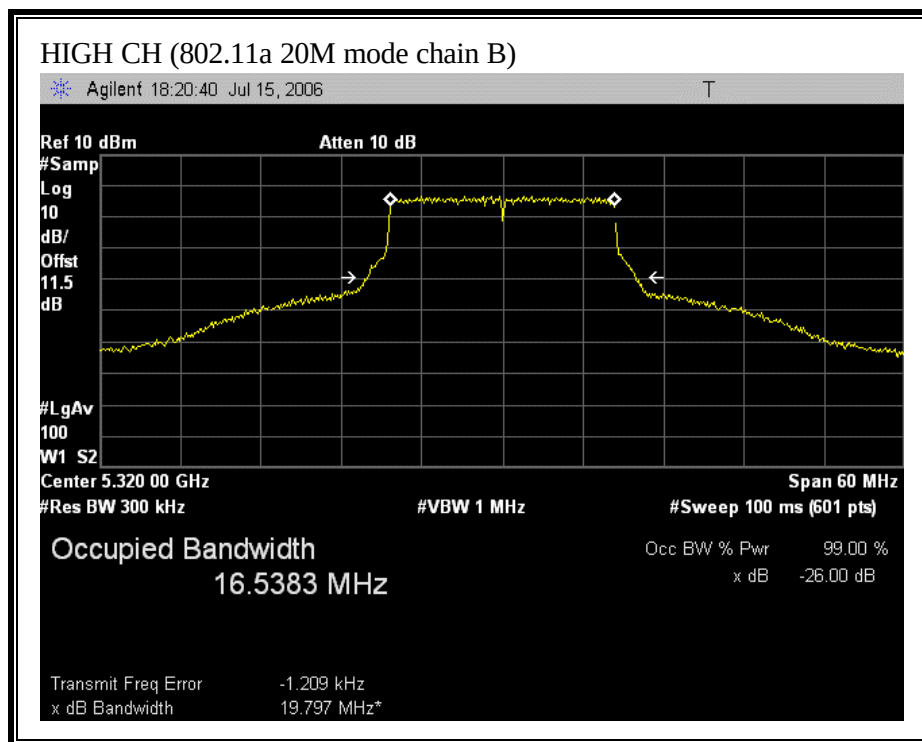


(802.11a 40M MODE CHAIN A)

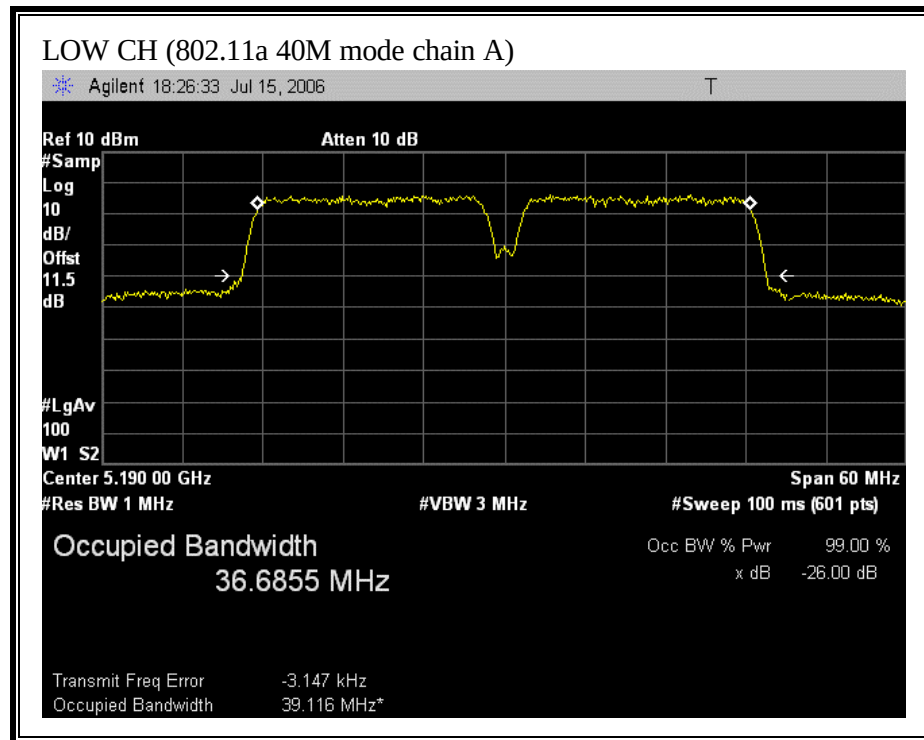


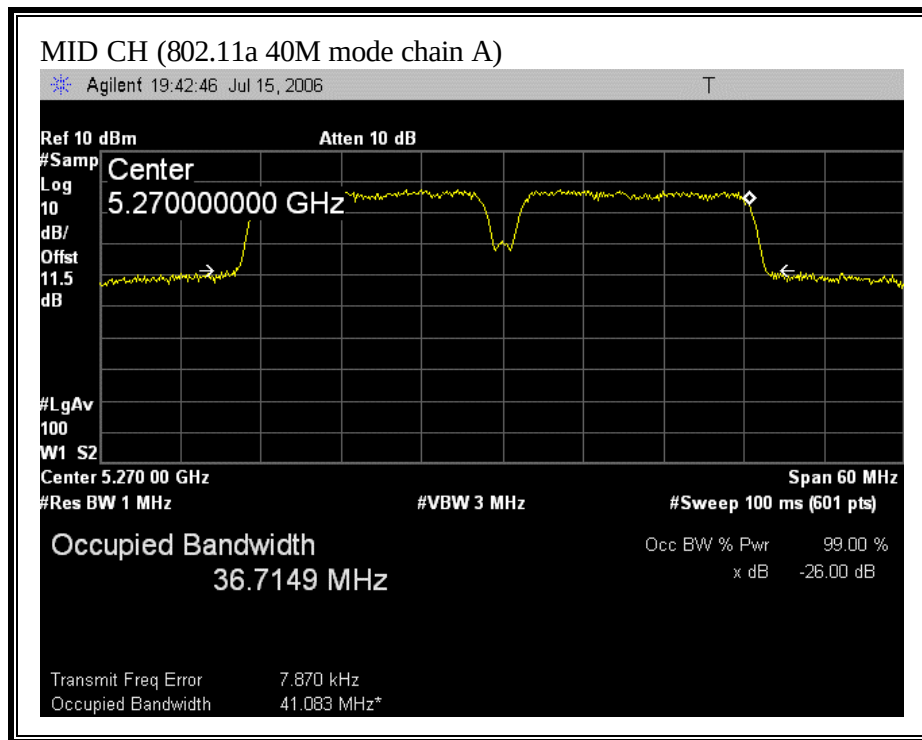


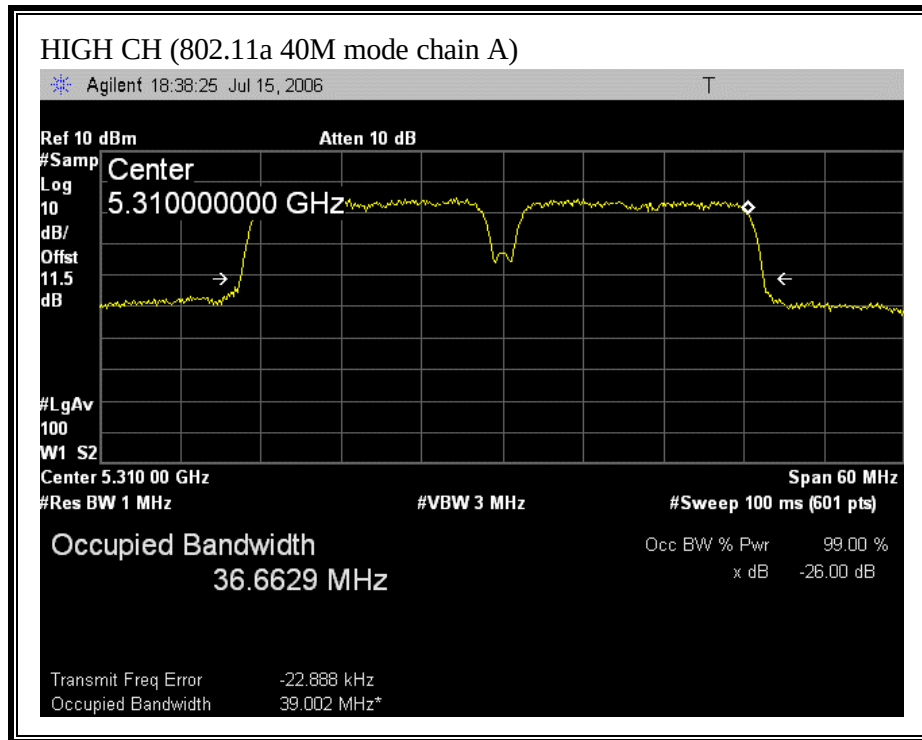


(802.11a 40M MODE CHAIN B)

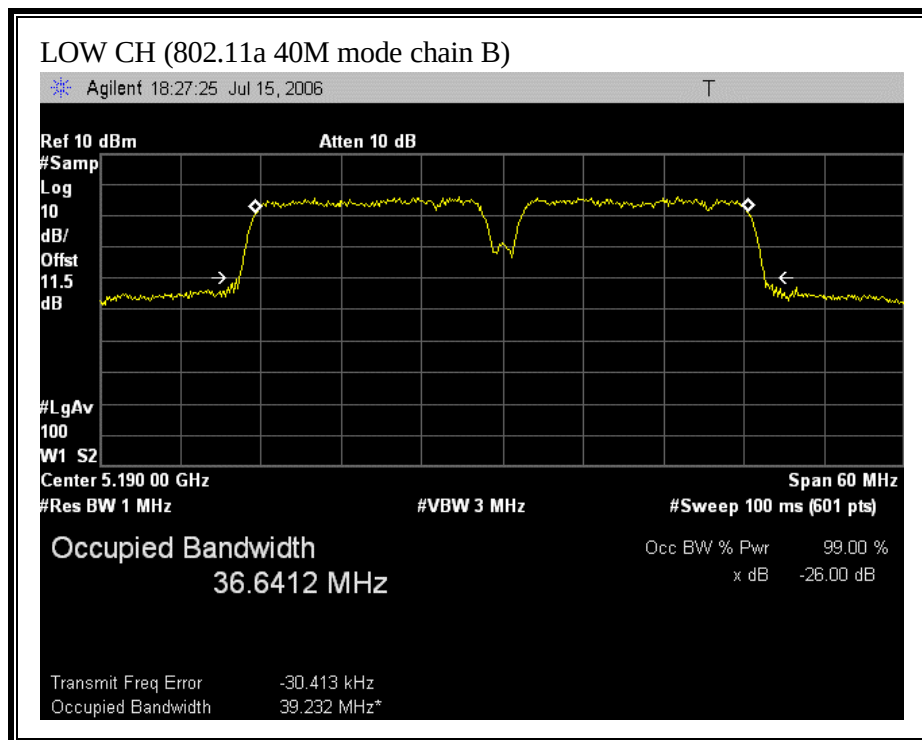


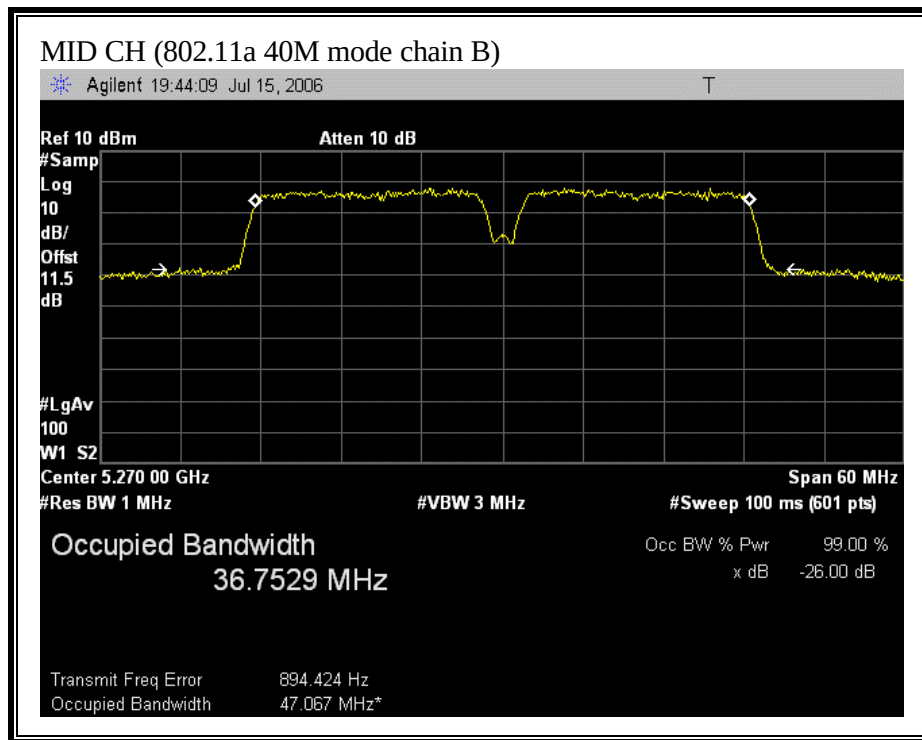


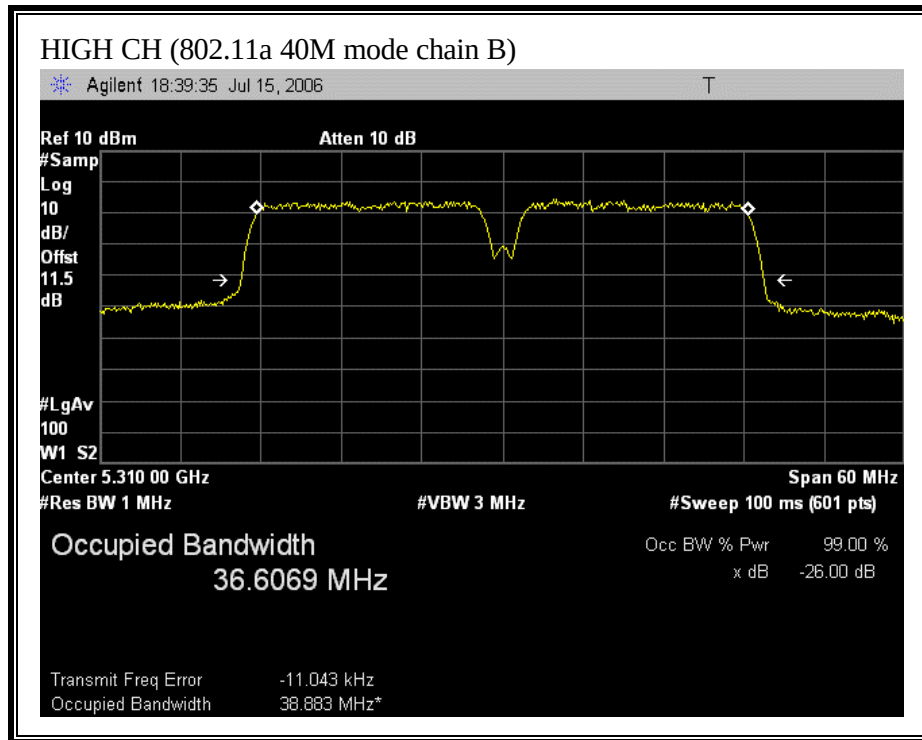


(802.11n HT20 MODE CHAIN A)

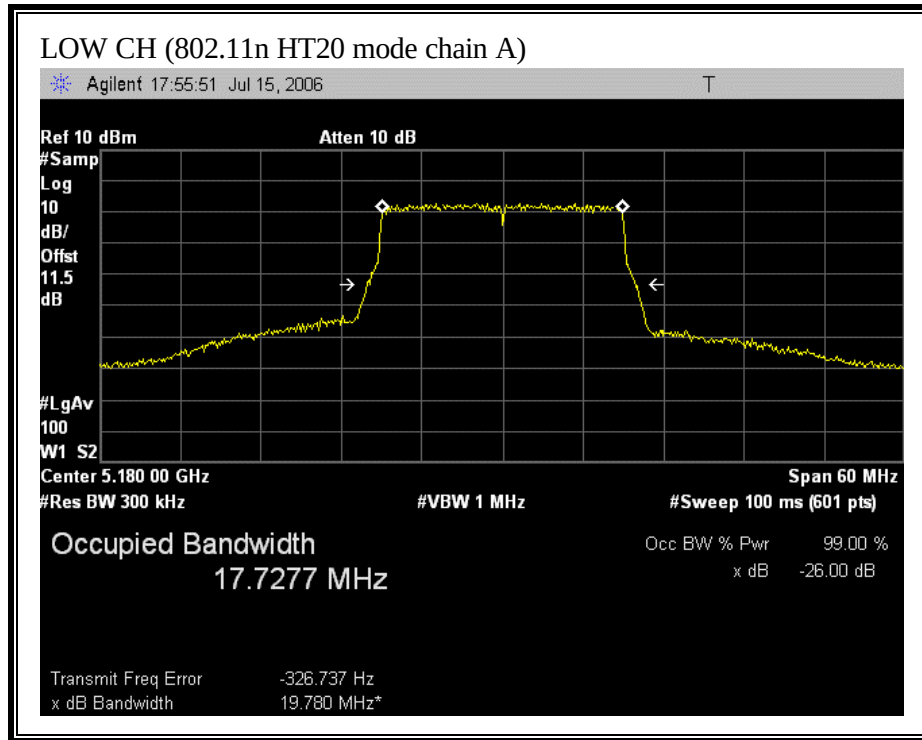


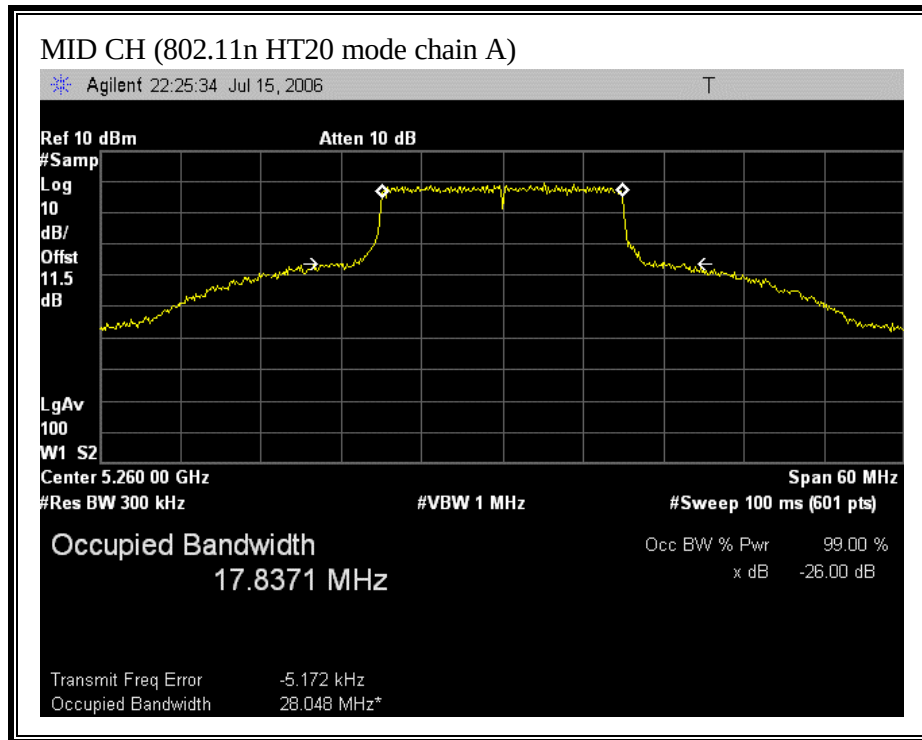


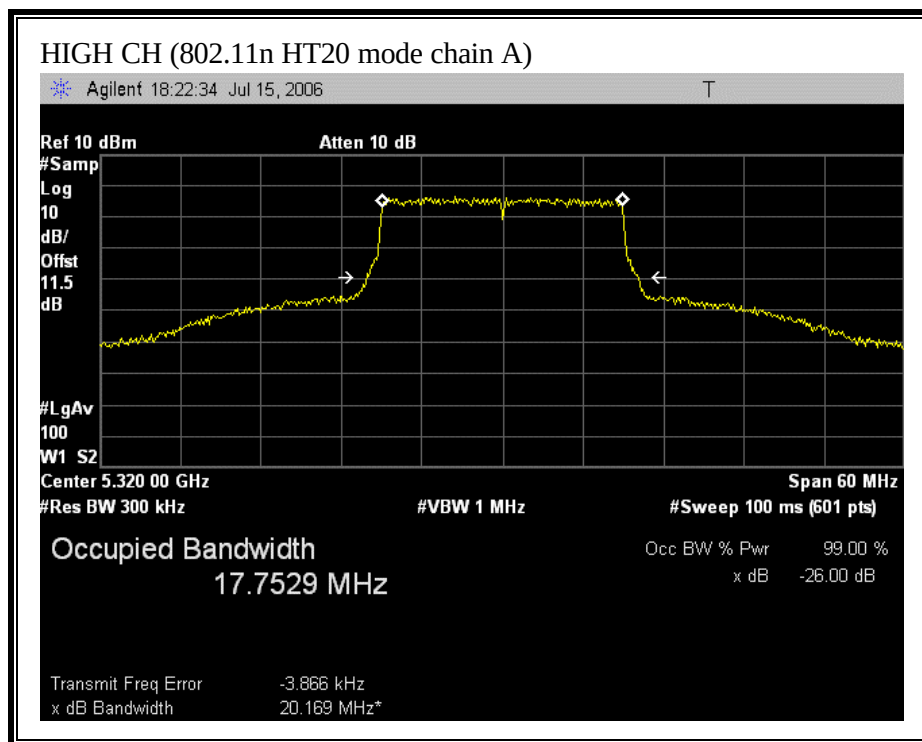


(802.11 HT20 MODE CHAIN B)

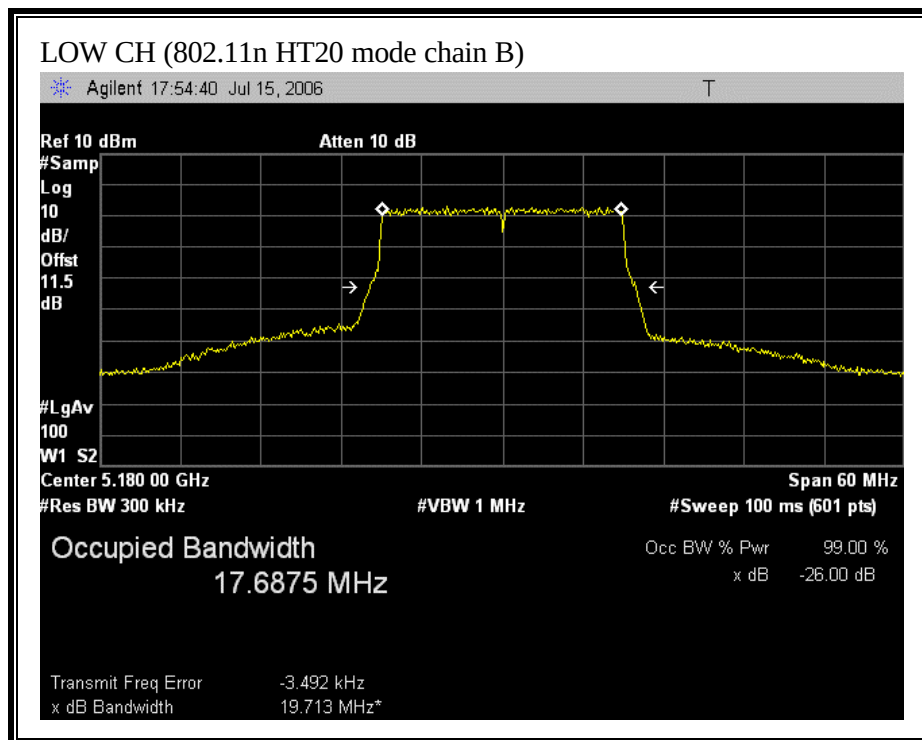


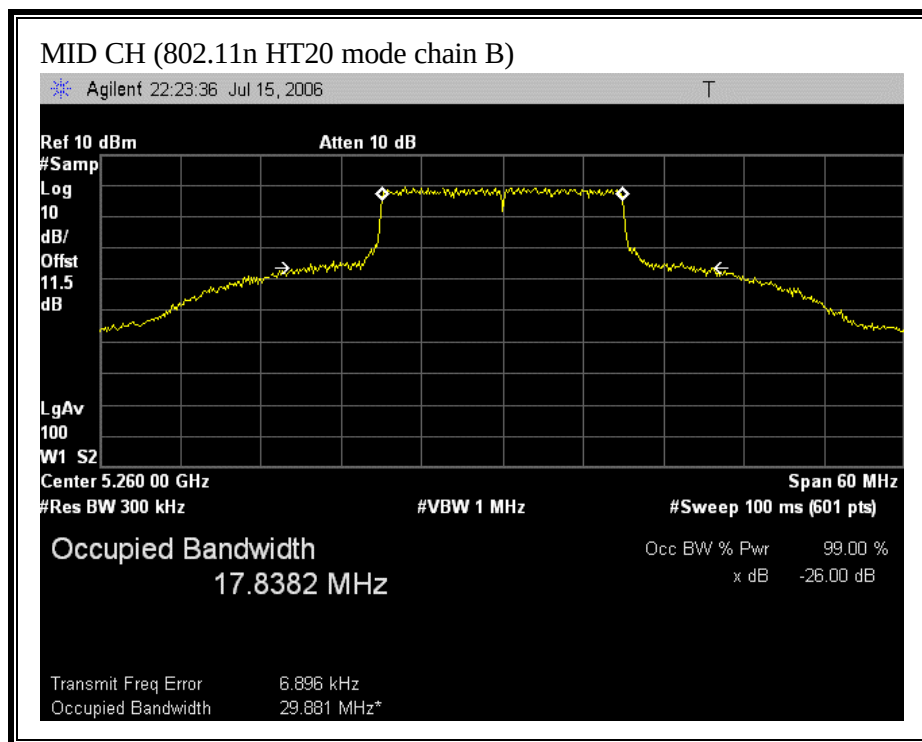


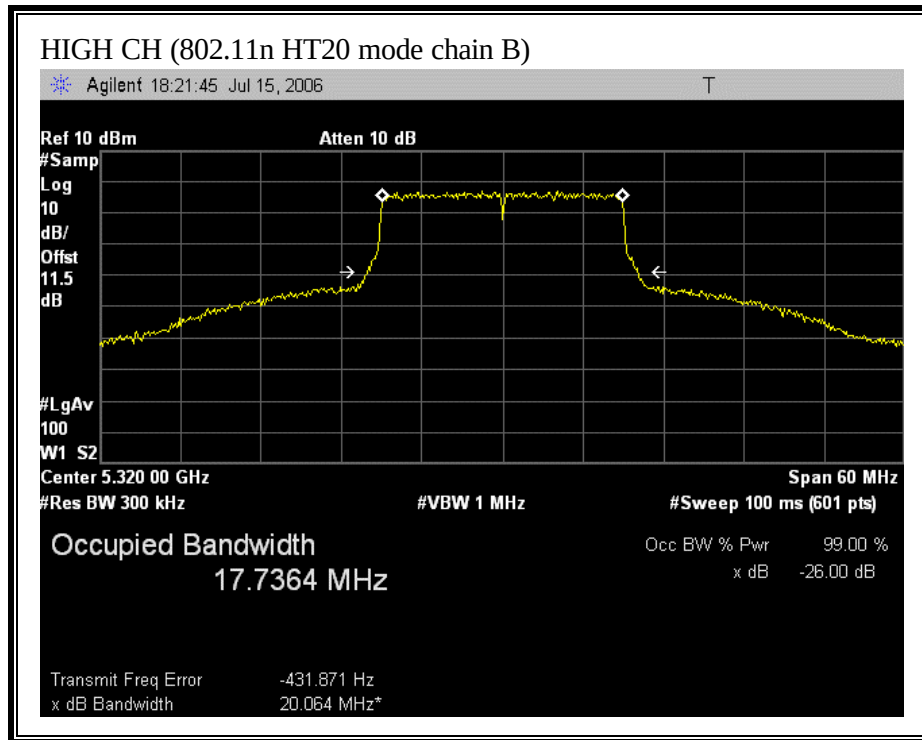


(802.11 HT40 MODE CHAIN A)

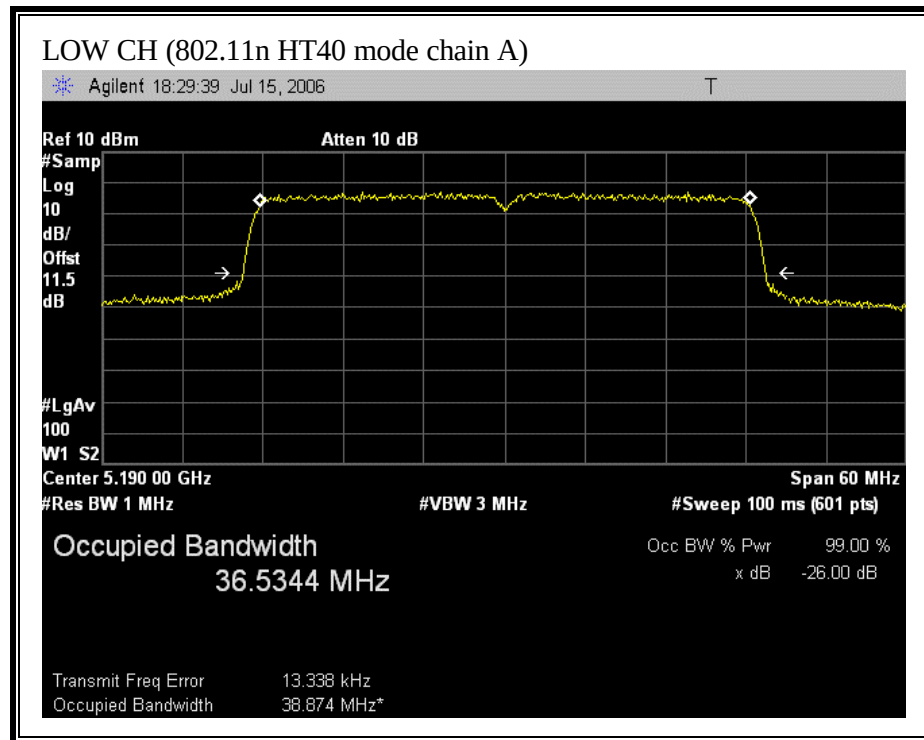


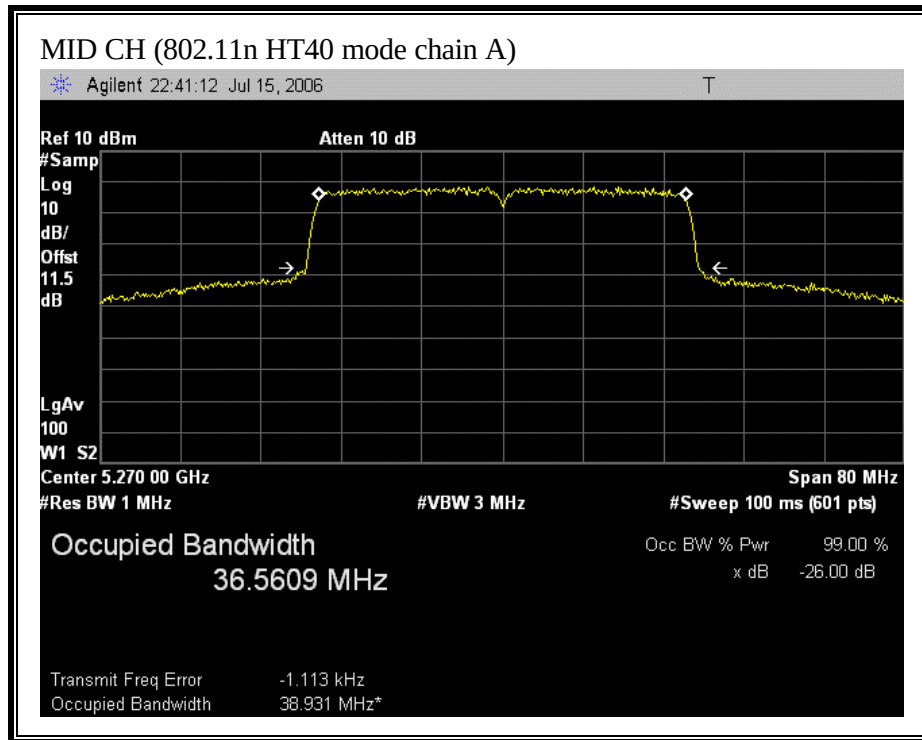


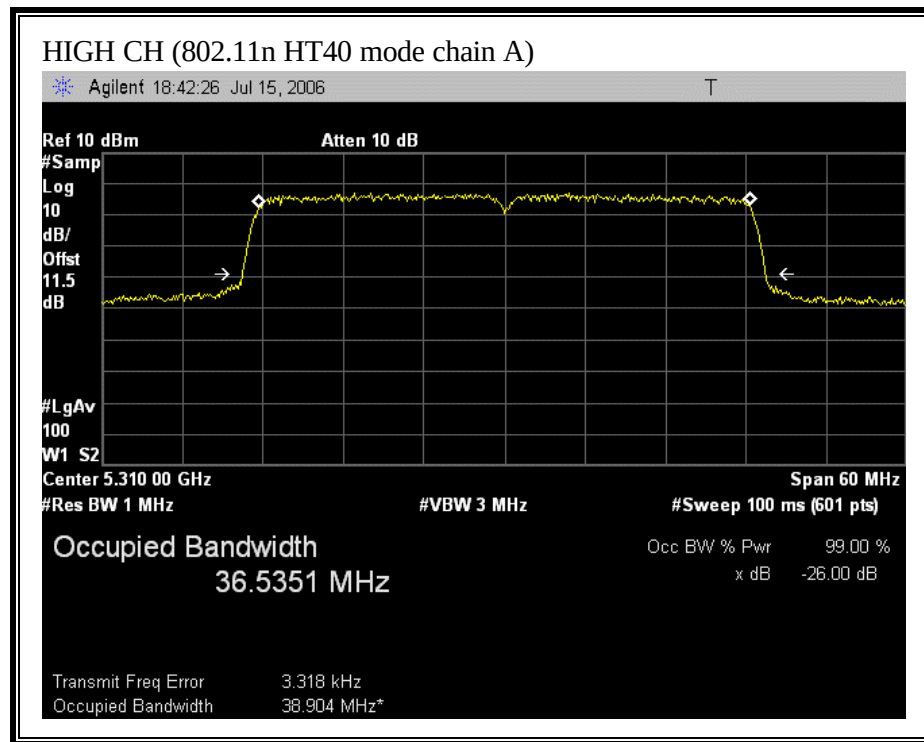

(802.11 HT40 MODE CHAIN B)

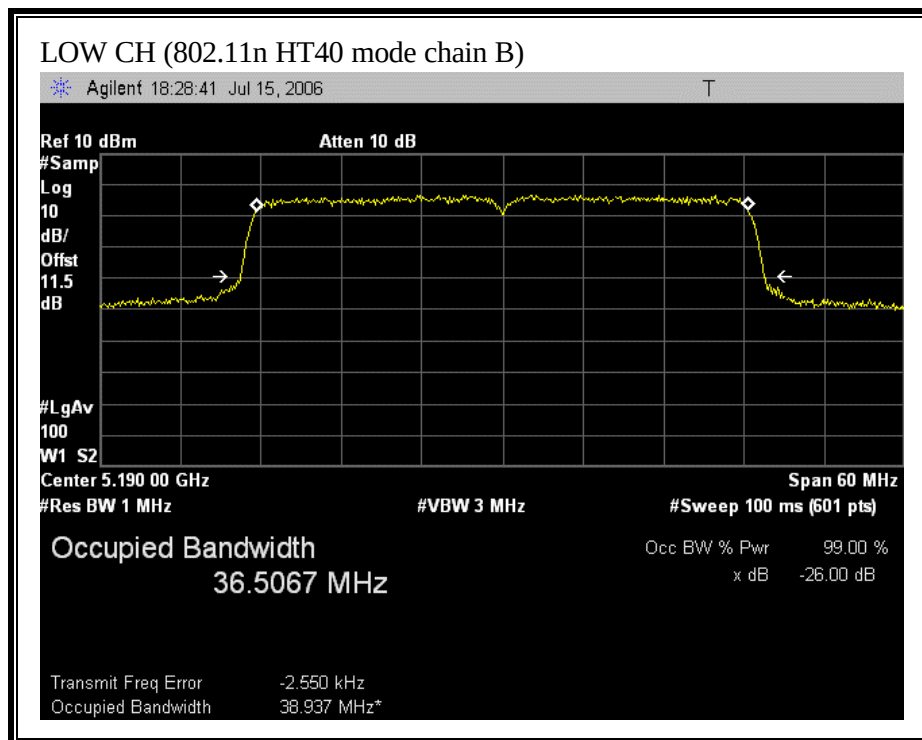

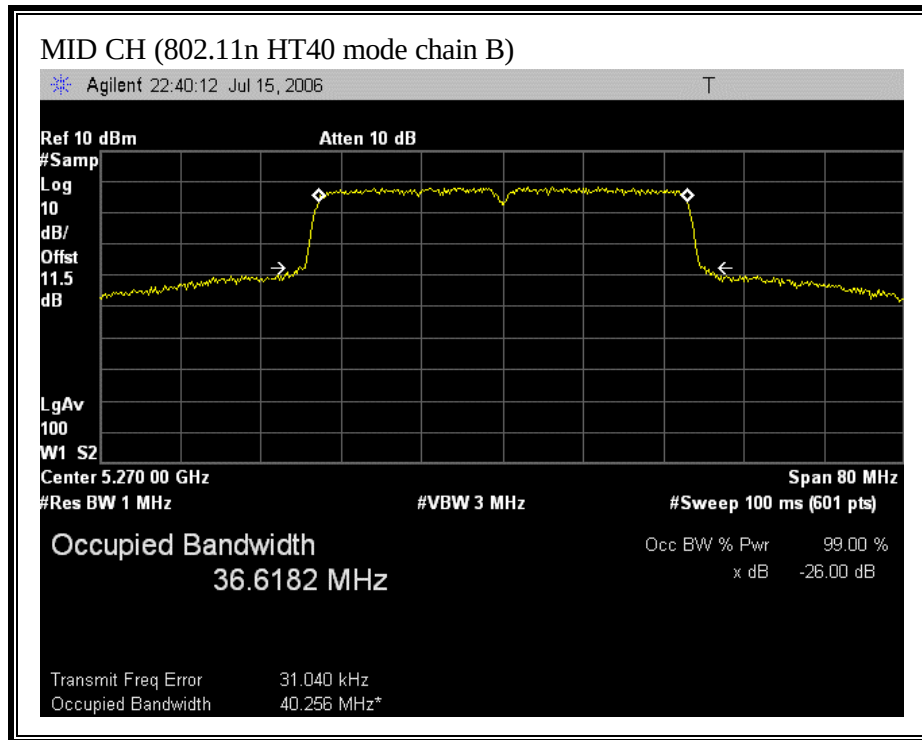

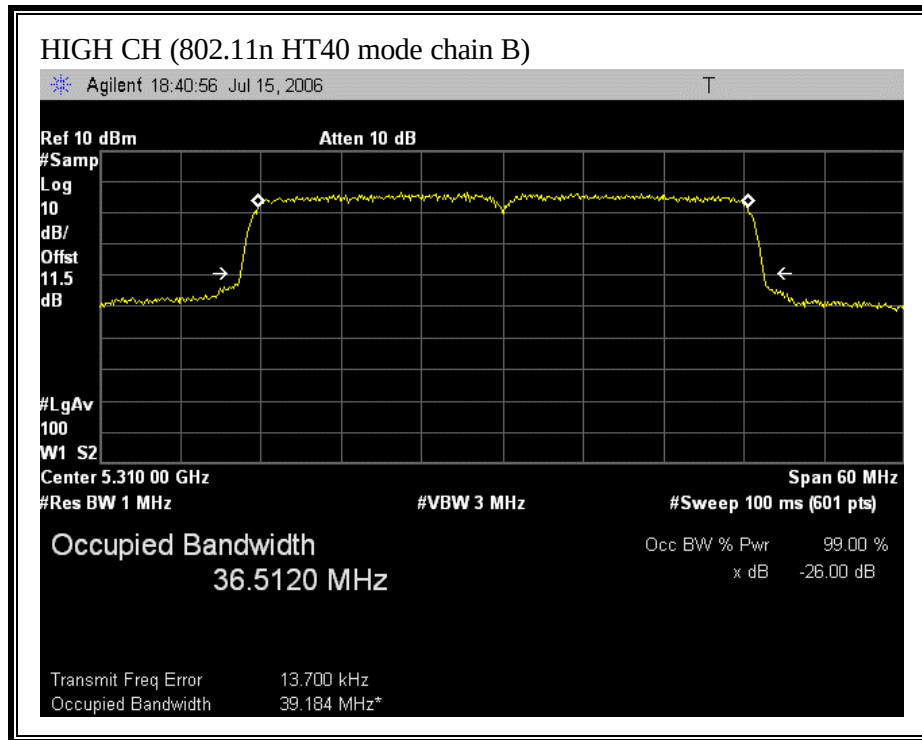

7.1.2. MAXIMUM POWER

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or 4 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{Chain 0 Power} / 10} + 10^{\text{Chain 2 Power} / 10})$

LIMITS AND RESULTS

No non-compliance noted:

5150 to 5250 Band

Fixed Limit (dBm)	17
Antenna Gain (dBi)	4.3
10 Log (# Tx Chains)	3.01
Effective Legacy Gain	7.31

5250 to 5350 Band

Fixed Limit (dBm)	24
Antenna Gain (dBi)	6.2
10 Log (# Tx Chains)	3.01
Effective Legacy Gain	9.21

Mode Chan	Freq (MHz)	10LogB (dBm)	4+10LogB / 11+10LogB Limit (dBm)	Limit (dBm)	Chain A Power (dBm)	Chain B Power (dBm)	Total Power (dBm)	Margin (dB)
------------------	-------------------	---------------------	---	--------------------	----------------------------	----------------------------	--------------------------	--------------------

802.11a 20M Mode

Low	5180	16.47	20.47	15.69	8.31	8.31	11.32	-4.37
Mid	5260	16.48	27.48	20.79	14.13	14.23	17.19	-3.60
High	5320	16.42	27.42	23.80	14.02	14.26	17.15	-6.65

802.11a 40M Mode

Low	5190	20.62	24.62	15.69	12.07	11.76	14.93	-0.76
Mid	5270	20.66	31.66	20.79	13.50	13.68	16.60	-4.19
High	5310	20.65	31.65	23.80	10.73	9.51	13.17	-10.63


802.11n HT20 Mode


Low	5180	16.86	20.86	17.00	10.55	10.49	13.53	-3.47
Mid	5260	16.88	27.88	23.80	16.60	16.88	19.75	-4.05
High	5320	16.86	27.86	23.80	14.24	14.67	17.47	-6.33


802.11n HT40 Mode

Low	5190	19.86	23.86	17.00	12.90	12.88	15.90	-1.10
Mid	5270	19.87	30.87	23.80	14.14	14.83	17.51	-6.29
High	5310	19.9	30.90	23.80	13.25	12.80	16.04	-7.76


(802.11a 20M MODE CHAIN A)

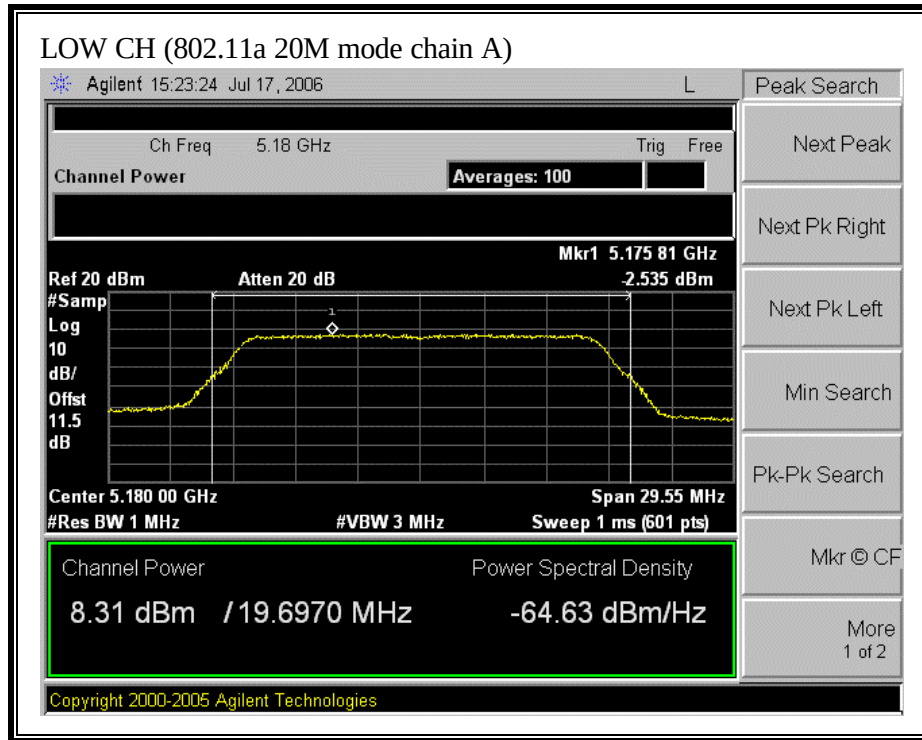


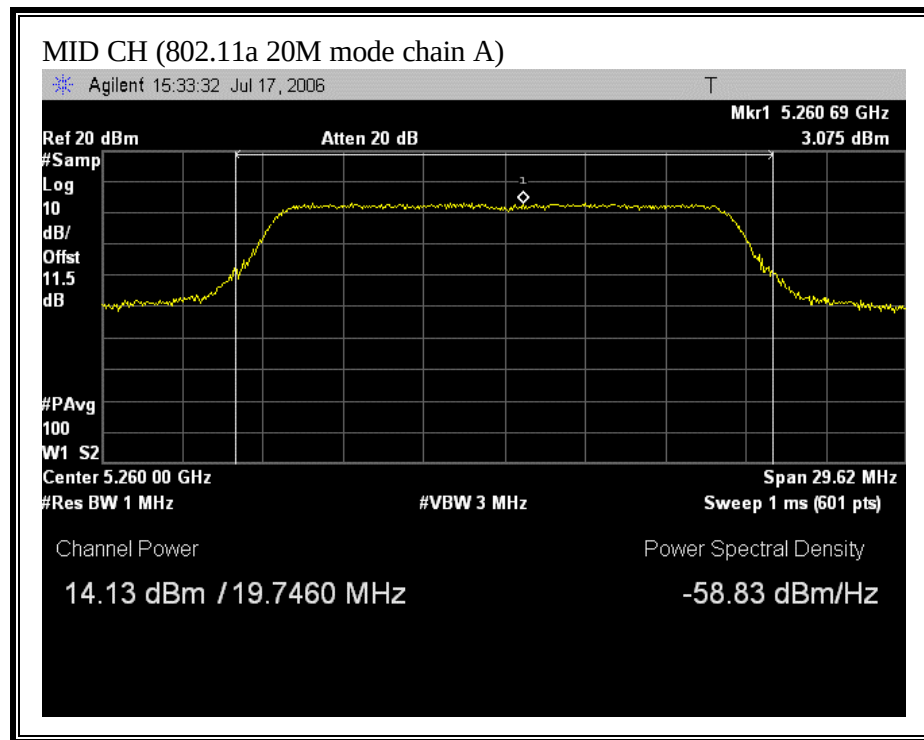


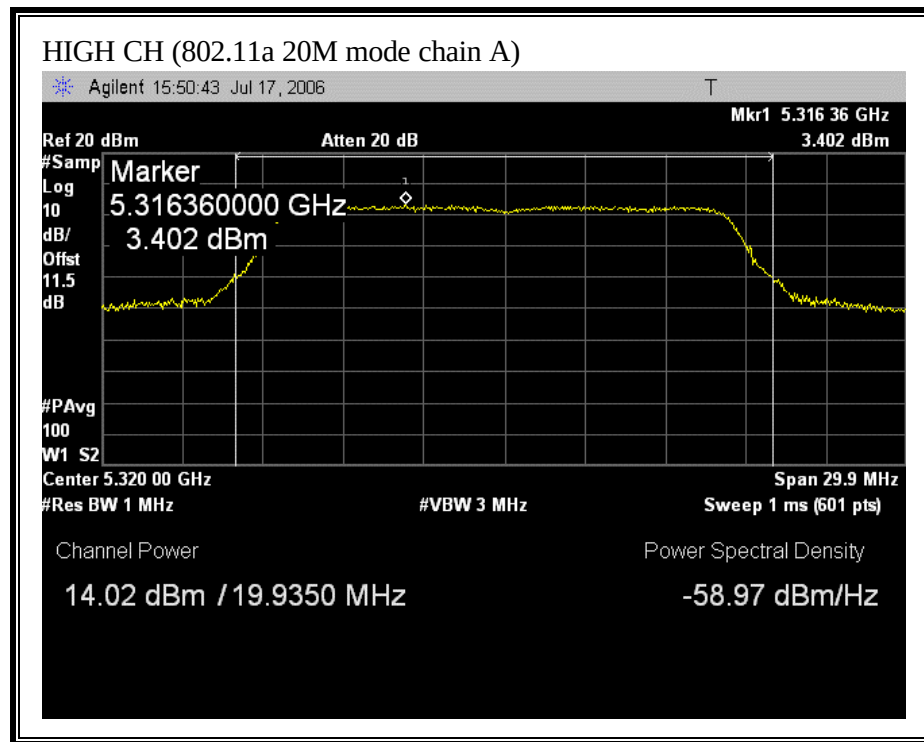


(802.11a 20M MODE CHAIN B)

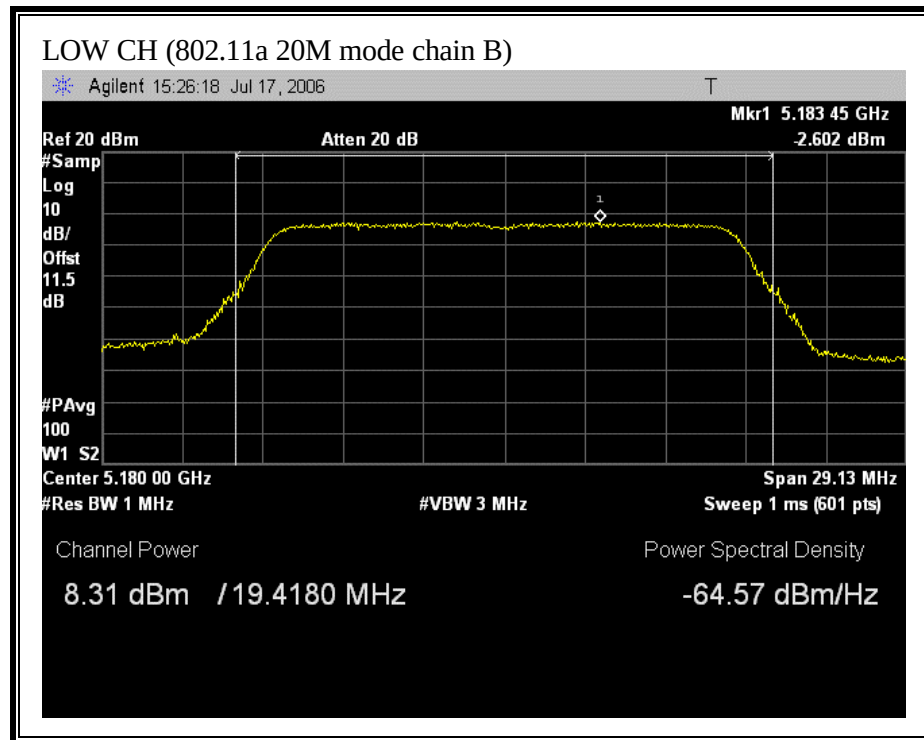


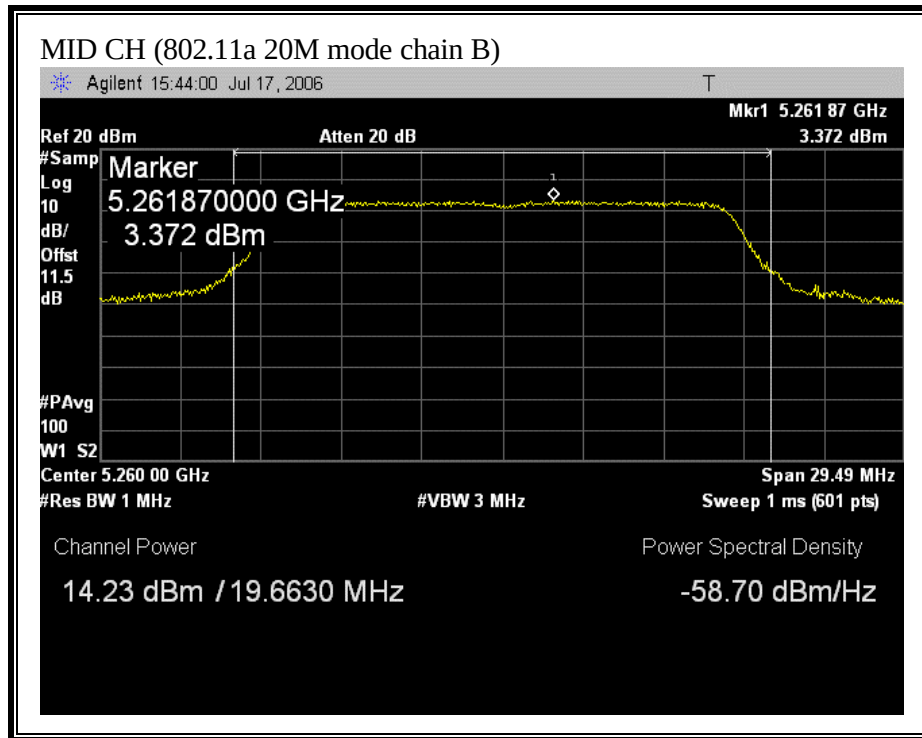


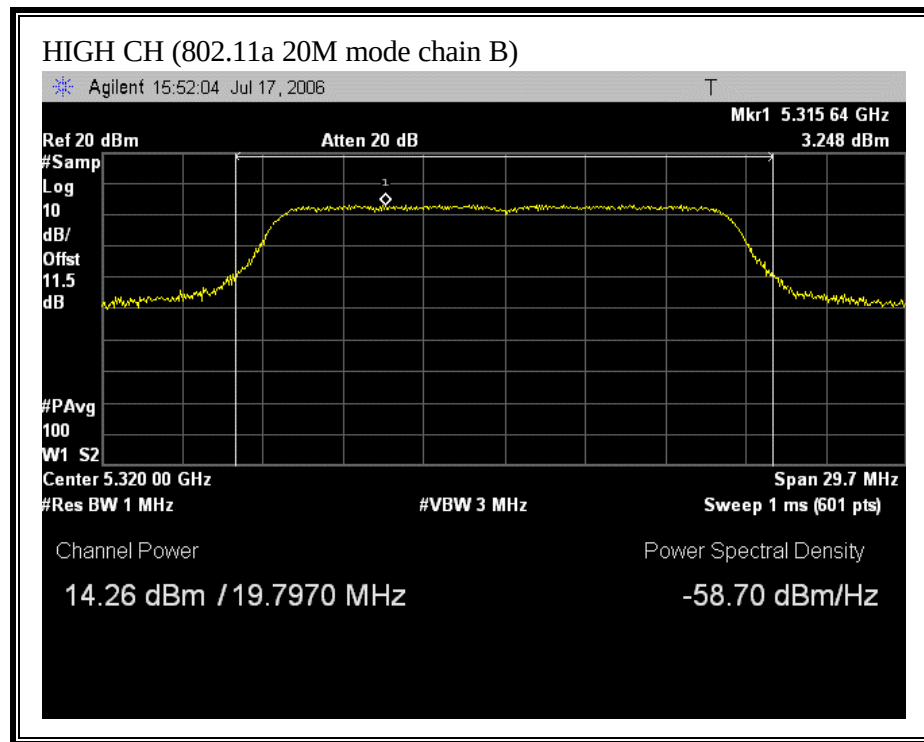


(802.11a 40M MODE CHAIN A)

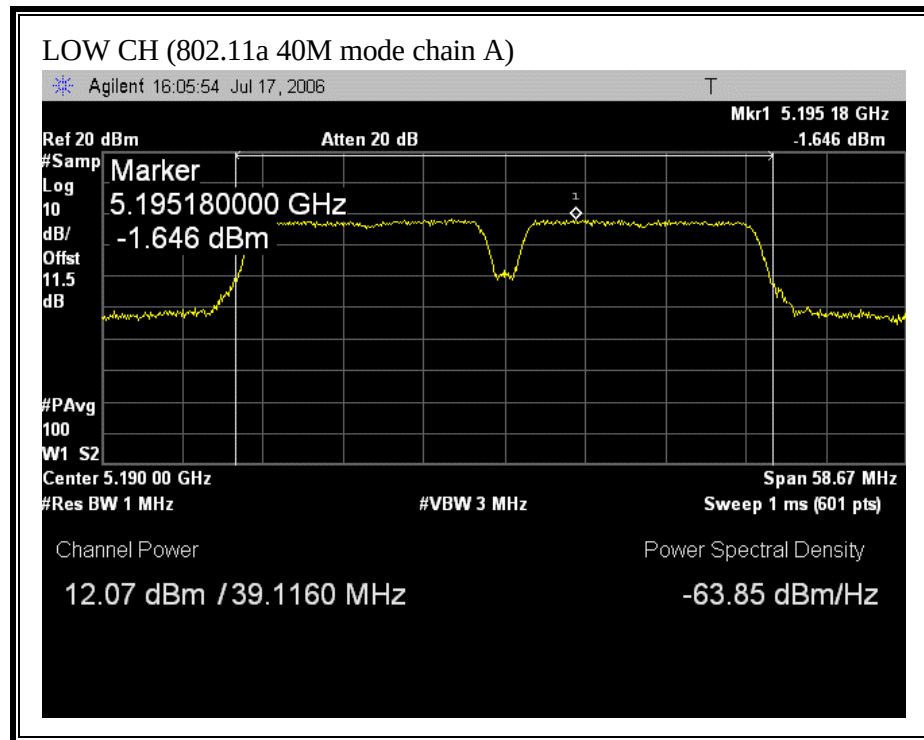


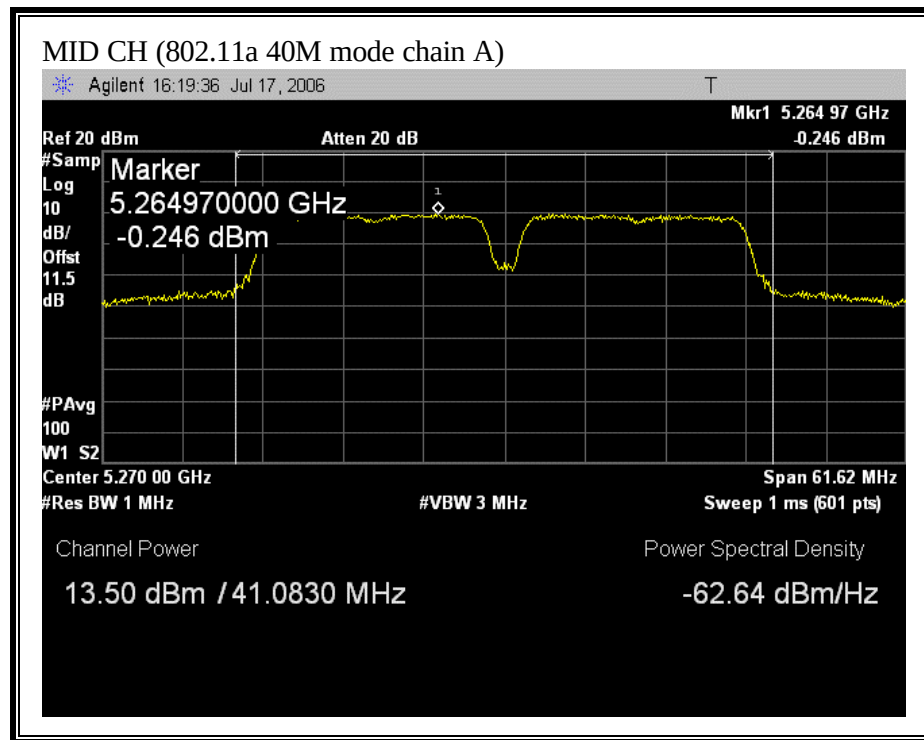


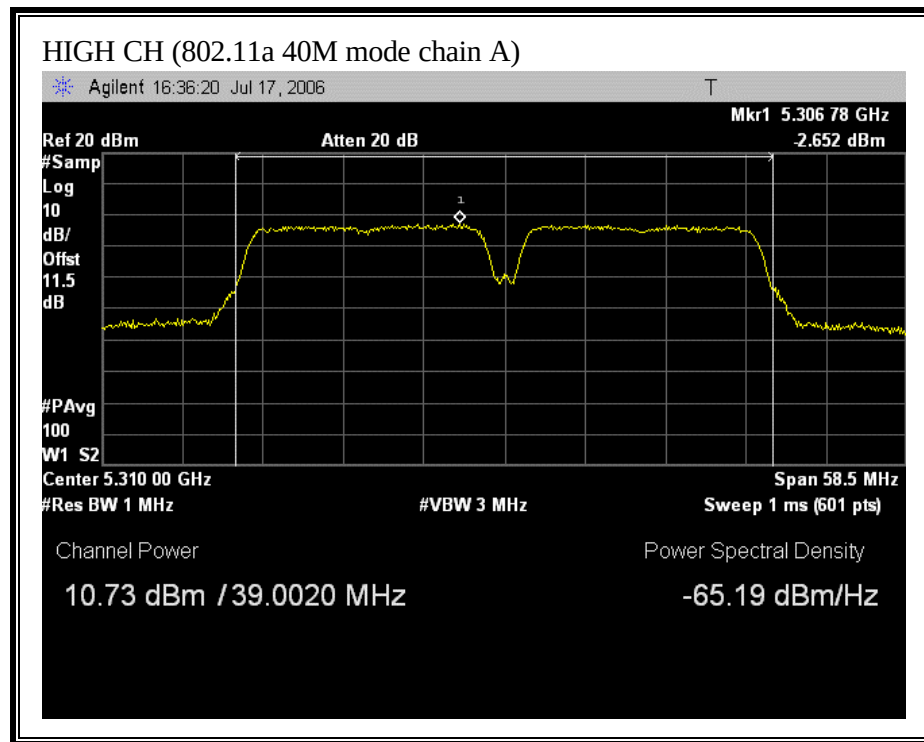


(802.11a 40M MODE CHAIN B)

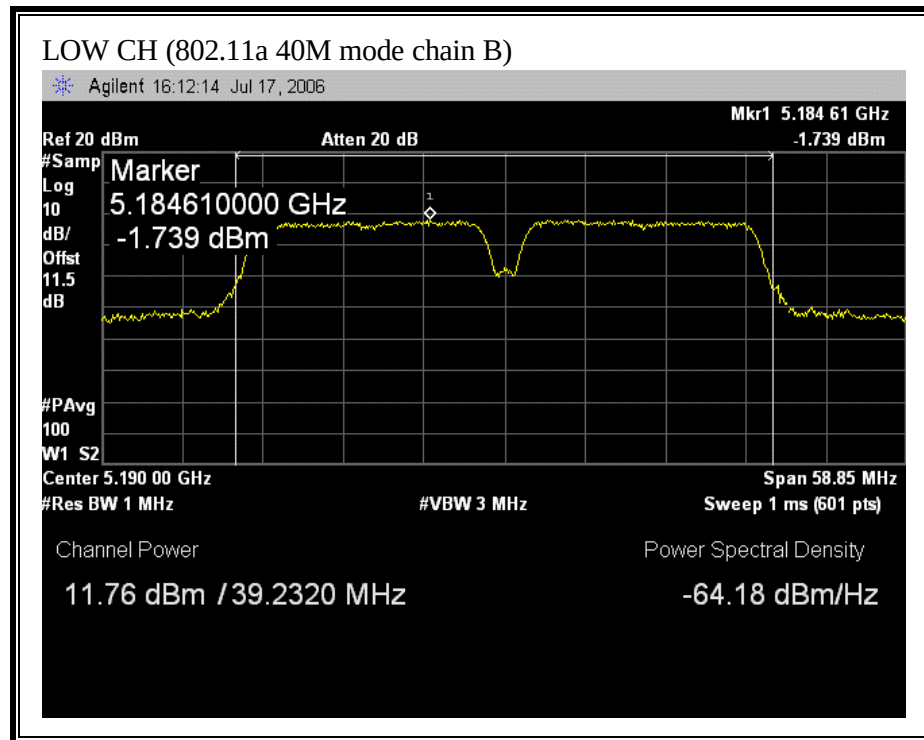


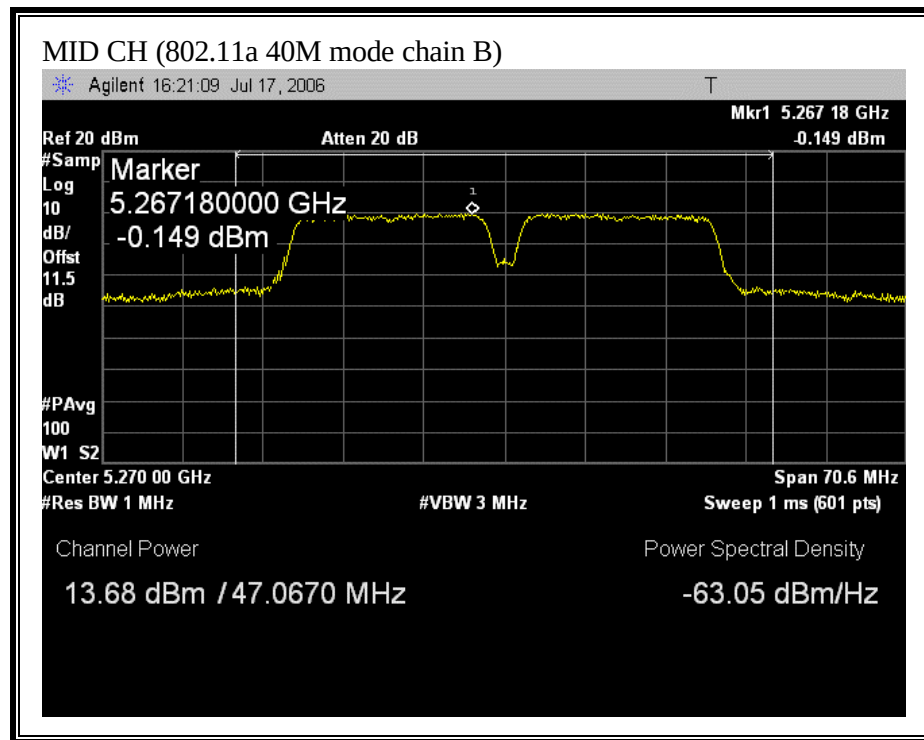


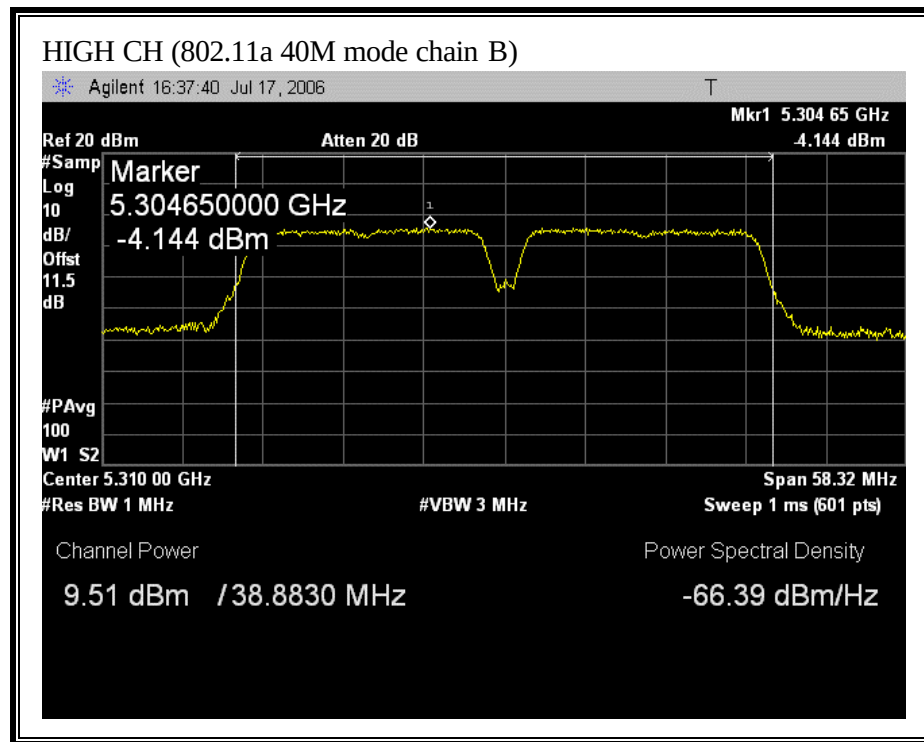


(802.11n HT20 MODE CHAIN A)

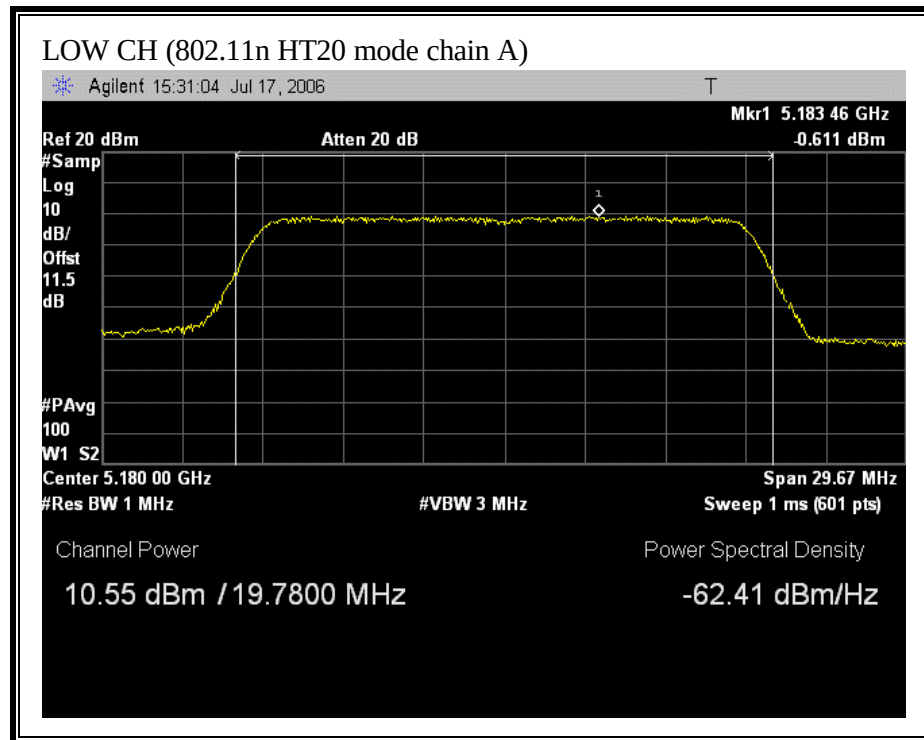


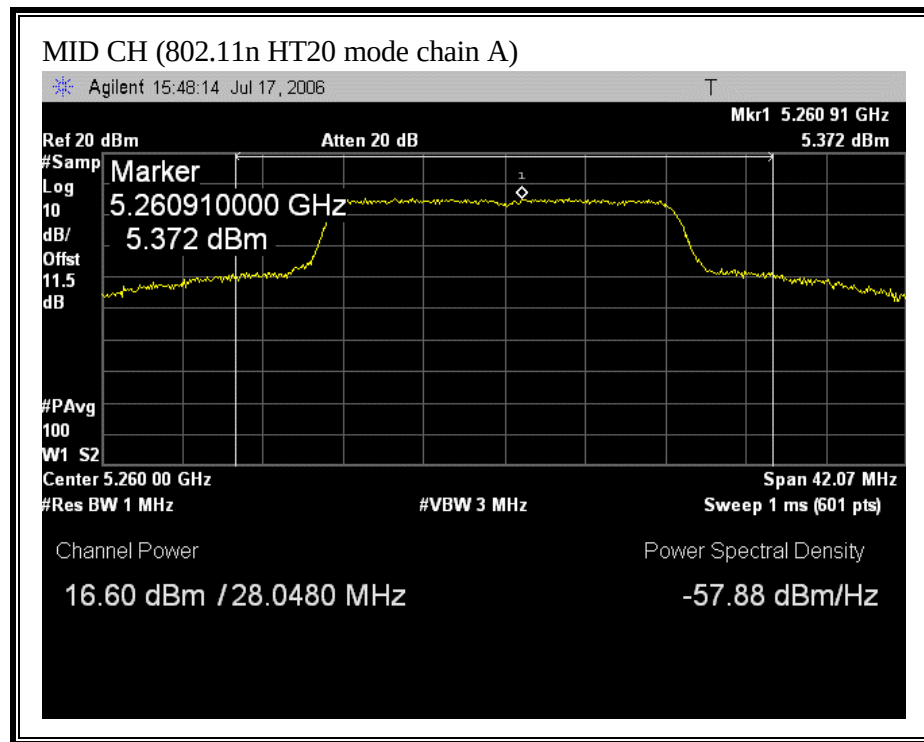


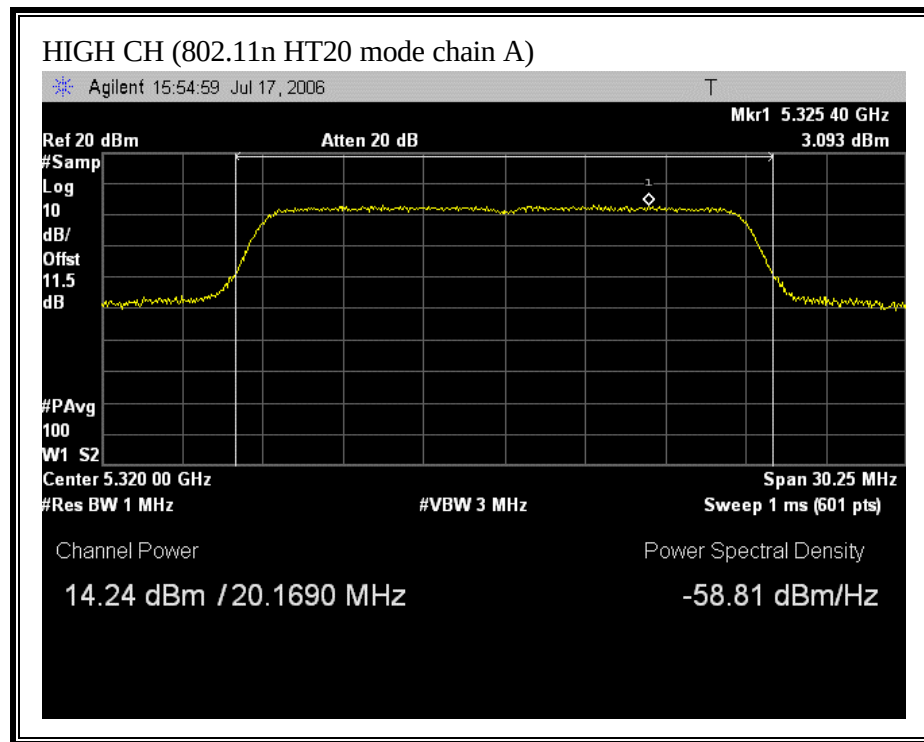


(802.11 HT20 MODE CHAIN B)

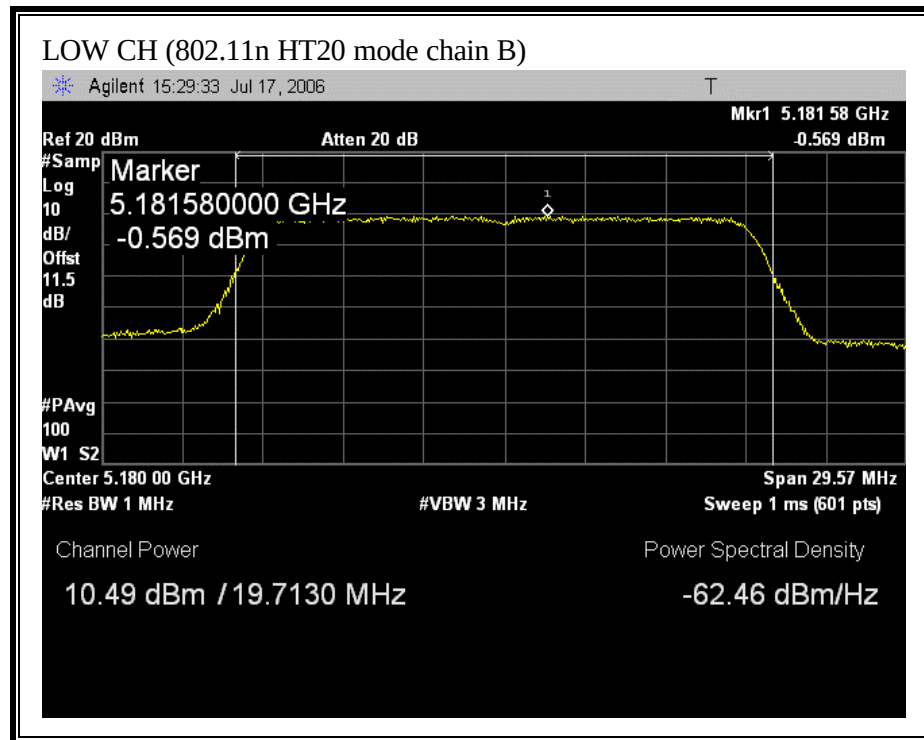


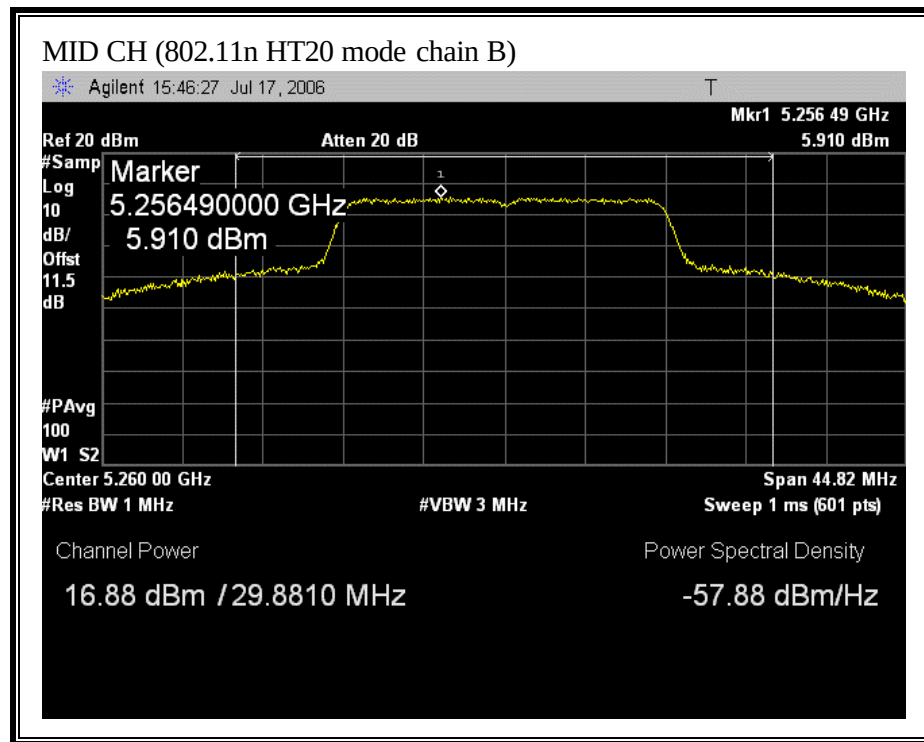


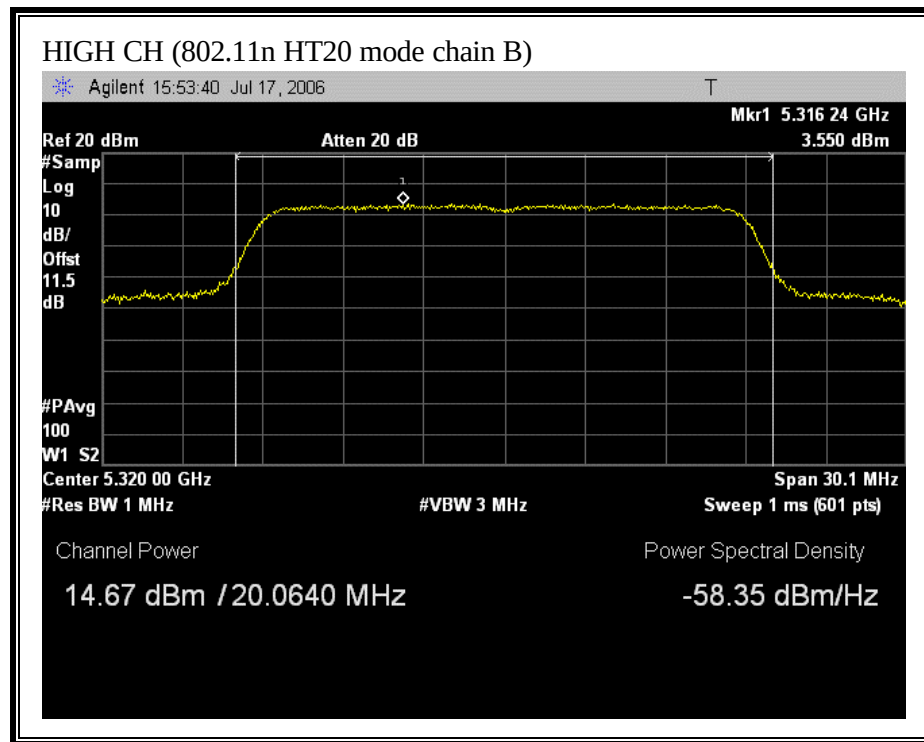


(802.11 HT40 MODE CHAIN A)

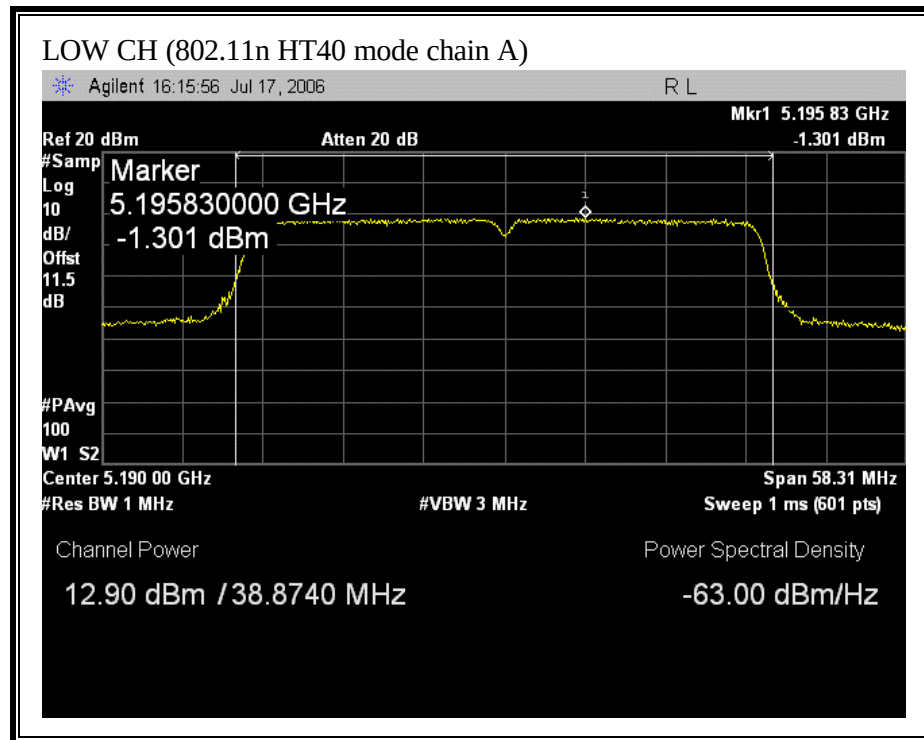


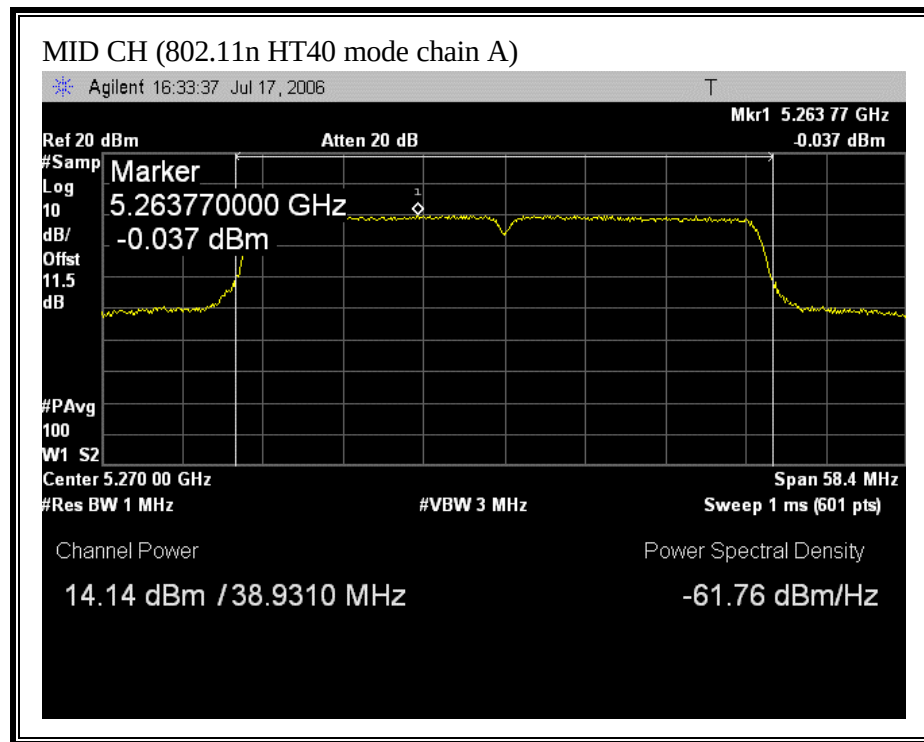


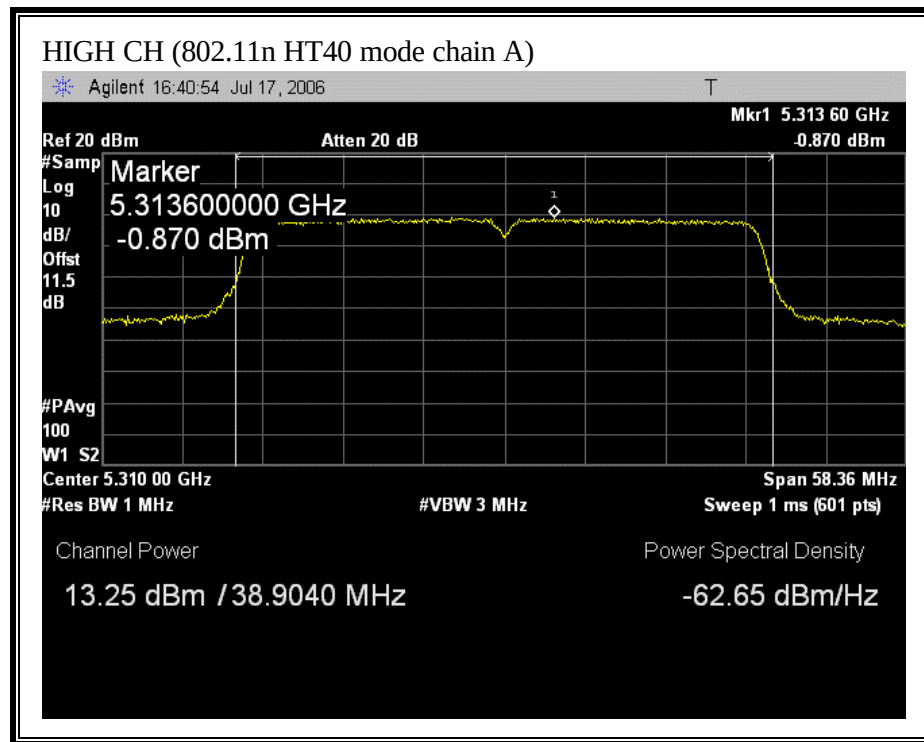

(802.11 HT40 MODE CHAIN B)

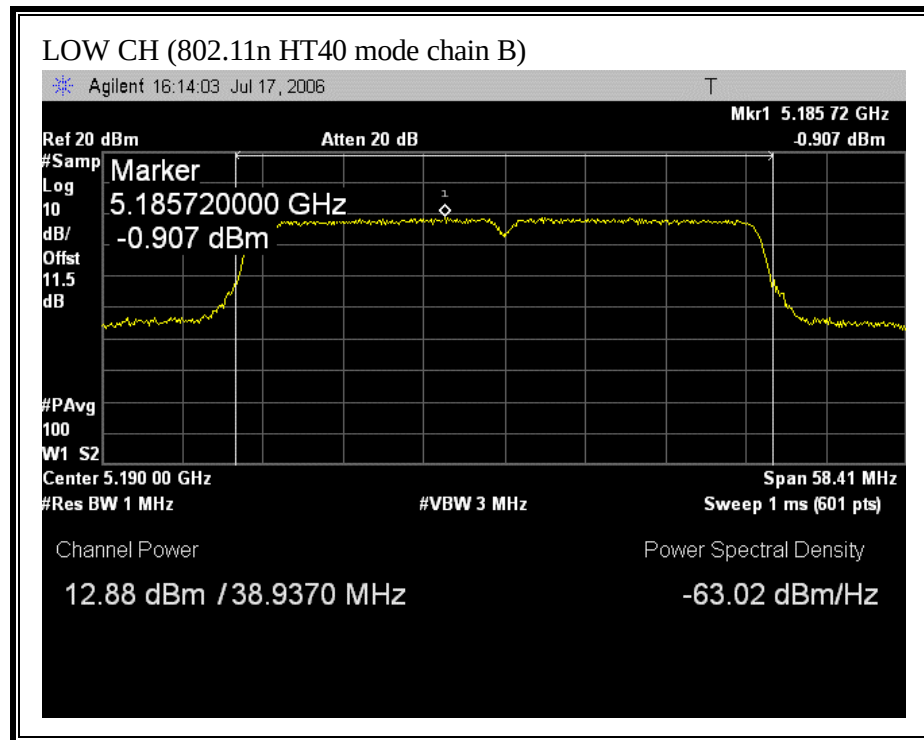

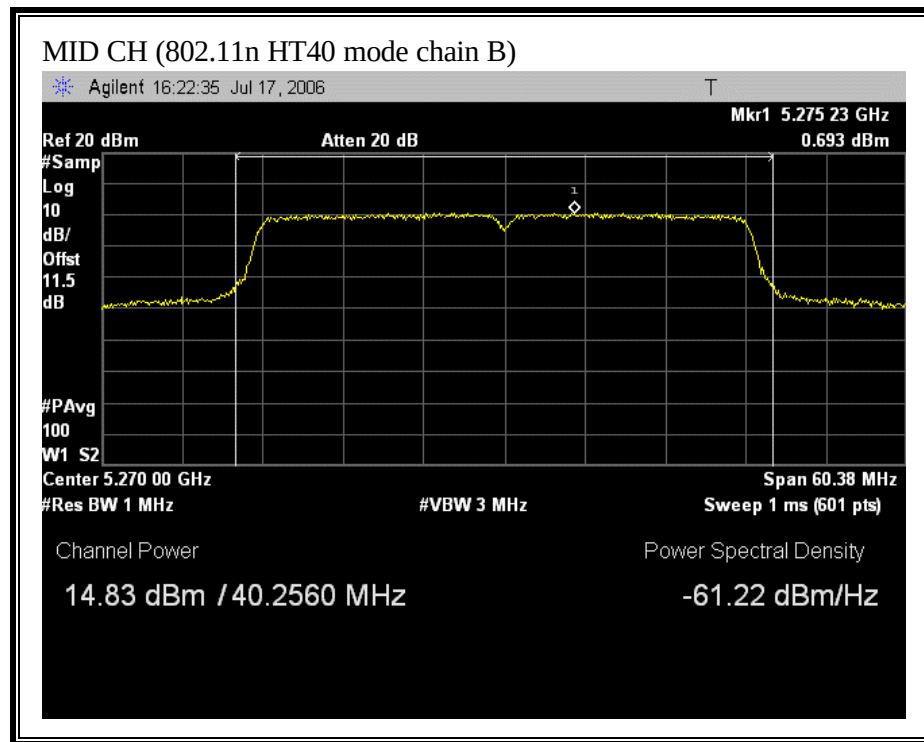

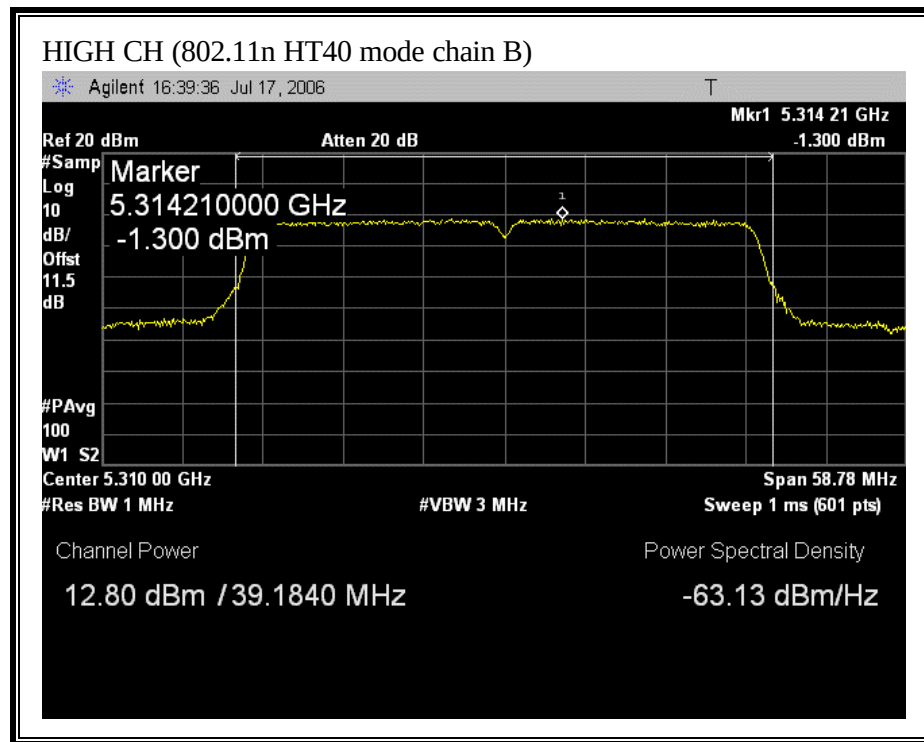

7.1.3. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{Chain 0 Power} / 10} + 10^{\text{Chain 2 Power} / 10})$

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain A (dBm)	Average Power Chain B (dBm)	Average Power Total (dBm)
-------------------------	----------------------------	--	--	--

802.11a 20M Mode

Low	5180	7.91	7.90	10.92
Middle	5260	13.19	13.23	16.22
High	5320	12.88	13.17	16.04

802.11a 40M Mode

Low	5190	11.07	11.10	14.10
Middle	5270	12.40	12.50	15.46
High	5310	9.53	9.20	12.38

802.11n HT20 Mode

Low	5180	9.84	10.04	12.95
Middle	5260	16.20	16.30	19.26
High	5320	13.52	13.50	16.52

802.11n HT40 Mode

Low	5190	12.07	11.75	14.92
Middle	5270	13.40	13.60	16.51
High	5310	11.97	11.78	14.89

7.1.4. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.407 (a) (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407 (a) (1) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

Each chain is measured separately and the total PPSD is calculated using:

Total PPSD = $10 \log (10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 2 PPSD} / 10})$

RESULTS

No non-compliance noted:

5150 to 5250 Band

Antenna Gain (dBi)	4.3
10 Log (# Tx Chains)	3.01
Effective Legacy Gain	7.31

5250 to 5350 Band

Antenna Gain (dBi)	6.2
10 Log (# Tx Chains)	3.01
Effective Legacy Gain	9.21

Mode Channel	Frequency (MHz)	PPSD Chain A (dBm)	PPSD Chain B (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
---------------------	------------------------	---------------------------	---------------------------	-------------------------	--------------------	--------------------

802.11a 20M Mode

Low	5180	-3.923	-3.767	-0.83	2.69	-3.52
Middle	5260	1.651	1.827	4.75	7.79	-3.04
High	5320	0.457	0.920	3.70	7.79	-4.08

802.11a 40M Mode

Low	5190	-3.727	-3.313	-0.50	2.69	-3.19
Middle	5270	2.192	2.880	5.56	7.79	-2.23
High	5310	-5.502	-5.584	-2.53	7.79	-10.32

802.11n HT20 Mode

Low	5180	-2.570	-1.716	0.89	4.00	-3.11
Middle	5260	5.030	4.724	7.89	10.80	-2.91
High	5320	0.442	1.305	3.91	10.80	-6.89

802.11n HT40 Mode

Low	5190	-2.258	-1.764	1.01	4.00	-2.99
Middle	5270	1.814	1.923	4.88	10.80	-5.92
High	5310	-4.177	-4.714	-1.43	10.80	-12.23

RESULTS WITH COMBINER

No non-compliance noted:

5150 to 5250 Band

Antenna Gain (dBi)	4.3
10 Log (# Tx Chains)	3.01
Effective Legacy Gain	7.31

5250 to 5350 Band

Antenna Gain (dBi)	6.2
10 Log (# Tx Chains)	3.01
Effective Legacy Gain	9.21

Mode Channel	Frequency (MHz)	PPSD With Combiner (dBm)	Limit (dBm)	Margin (dB)
---------------------	------------------------	---------------------------------	--------------------	--------------------

802.11a 20M Mode

Low	5180	2.063	2.690	-0.627
Middle	5260	7.491	7.790	-0.299
High	5320	7.198	7.790	-0.592

802.11a 40M Mode

Low	5190	2.463	2.690	-0.227
Middle	5270	6.900	7.790	-0.890
High	5310	-0.144	7.790	-7.934


802.11n HT20 Mode


Low	5180	3.318	4.000	-0.682
Middle	5260	9.497	10.800	-1.303
High	5320	6.638	10.800	-4.162


802.11n HT40 Mode

Low	5190	3.332	4.000	-0.668
Middle	5270	6.425	10.800	-4.375
High	5310	1.083	10.800	-9.717


(802.11a 20M MODE CHAIN A)

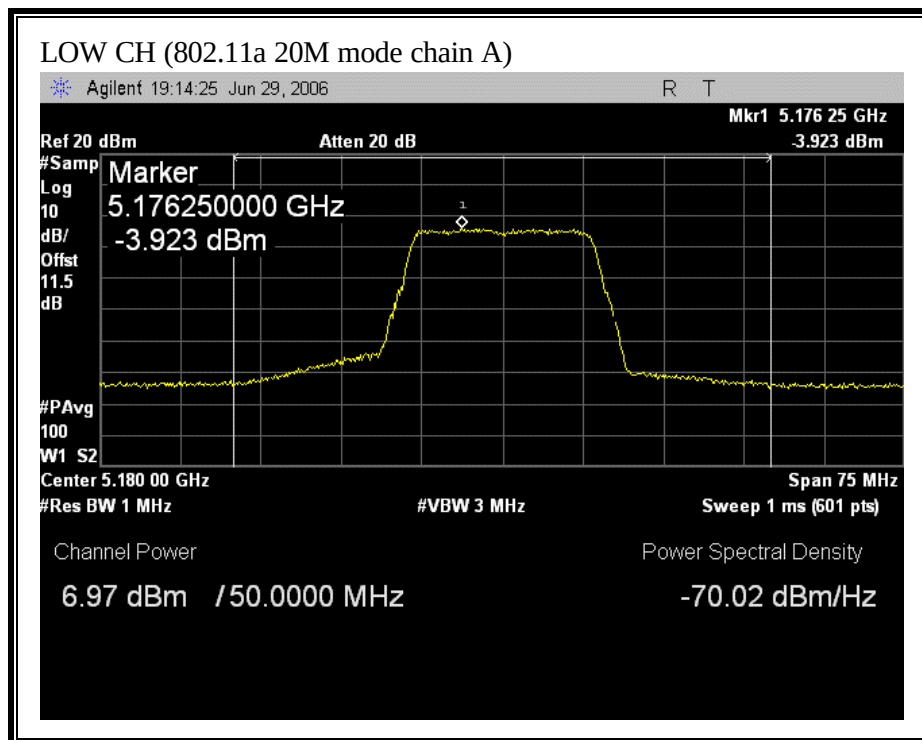


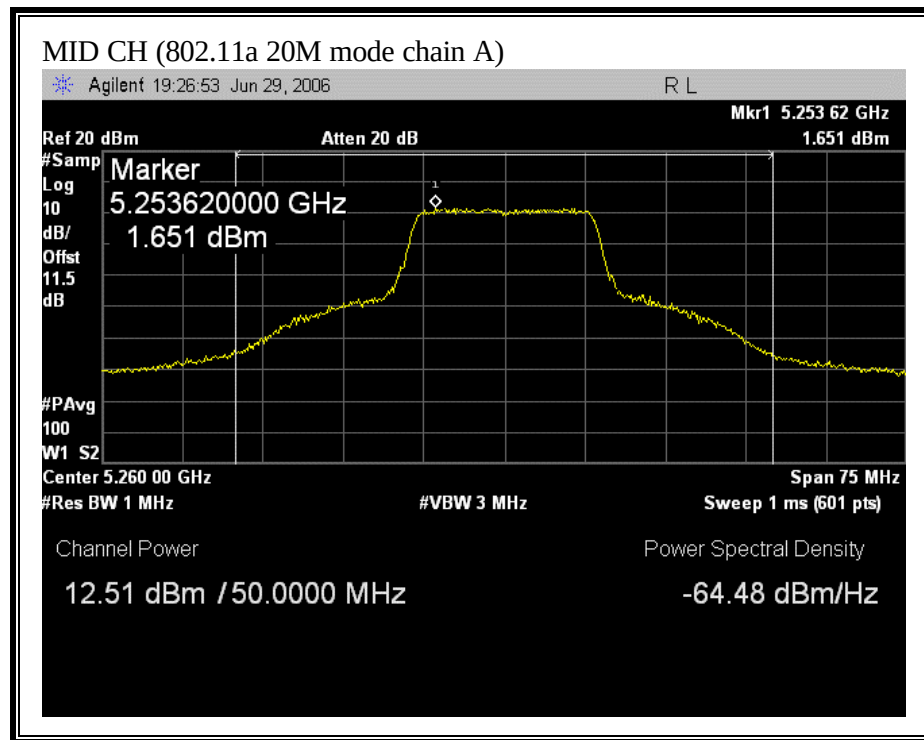


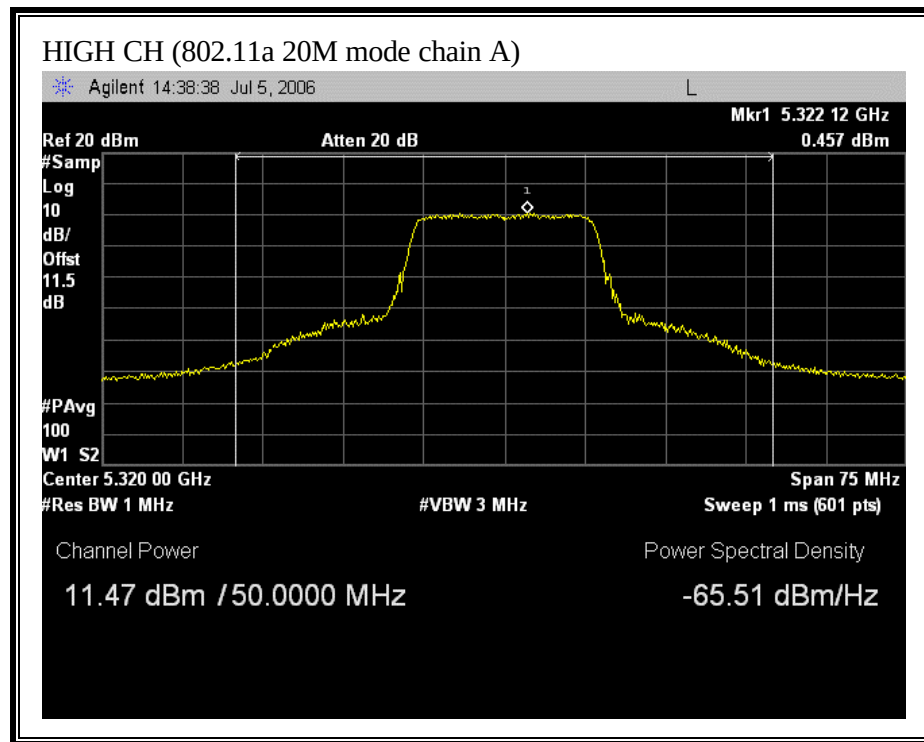


(802.11a 20M MODE CHAIN B)

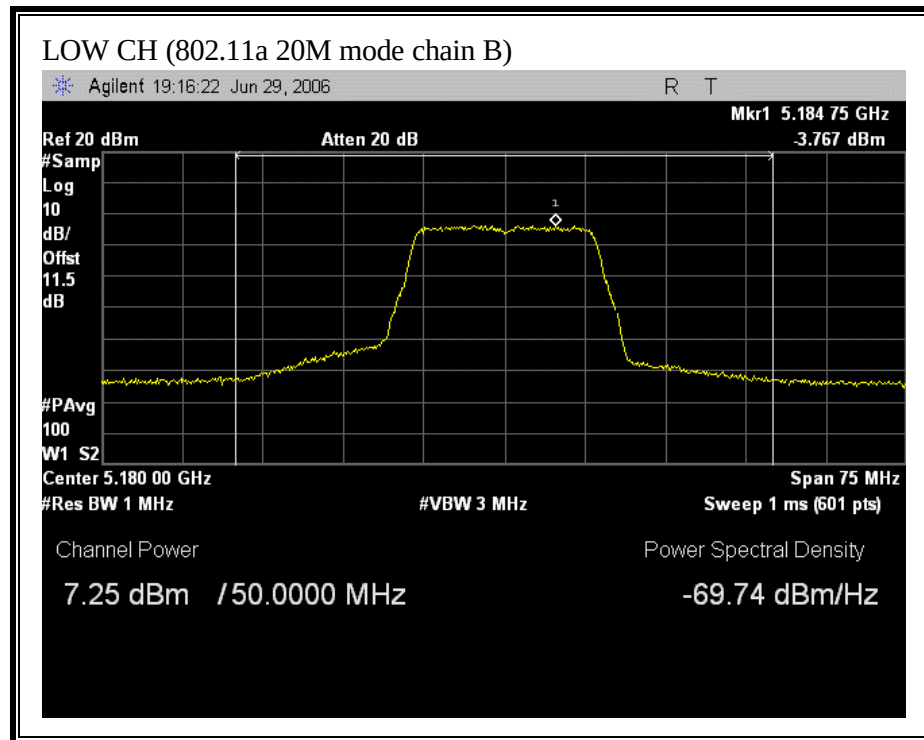


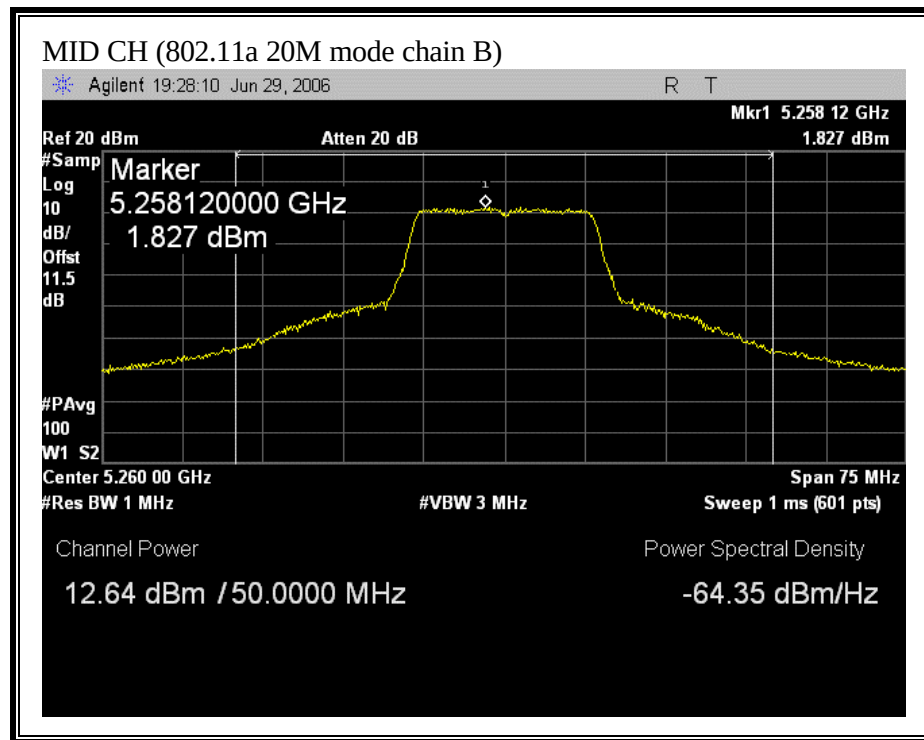


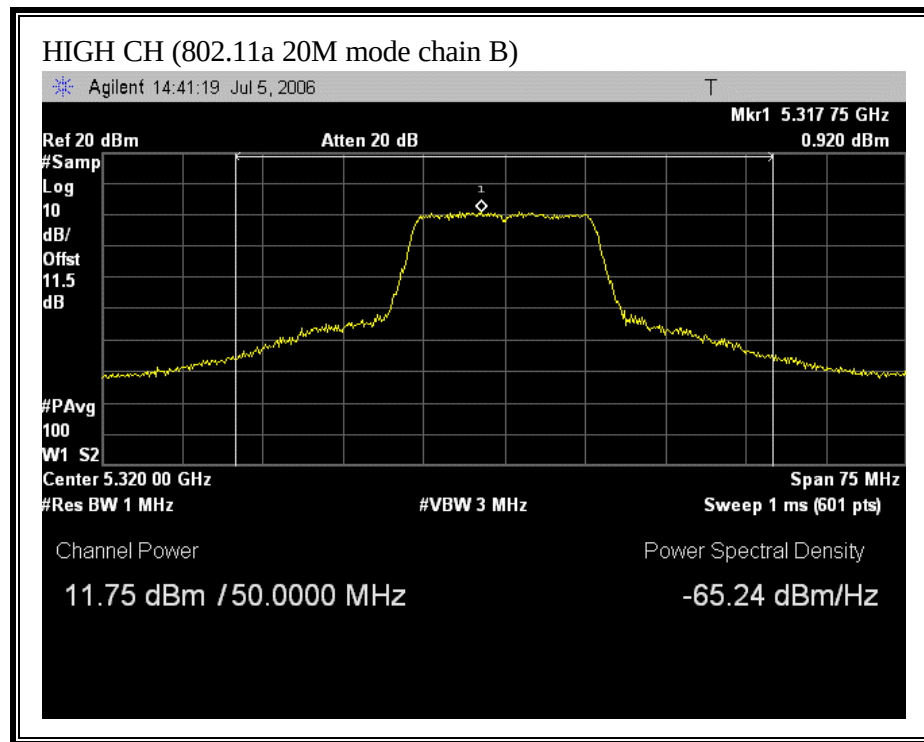


(802.11a 40M MODE CHAIN A)

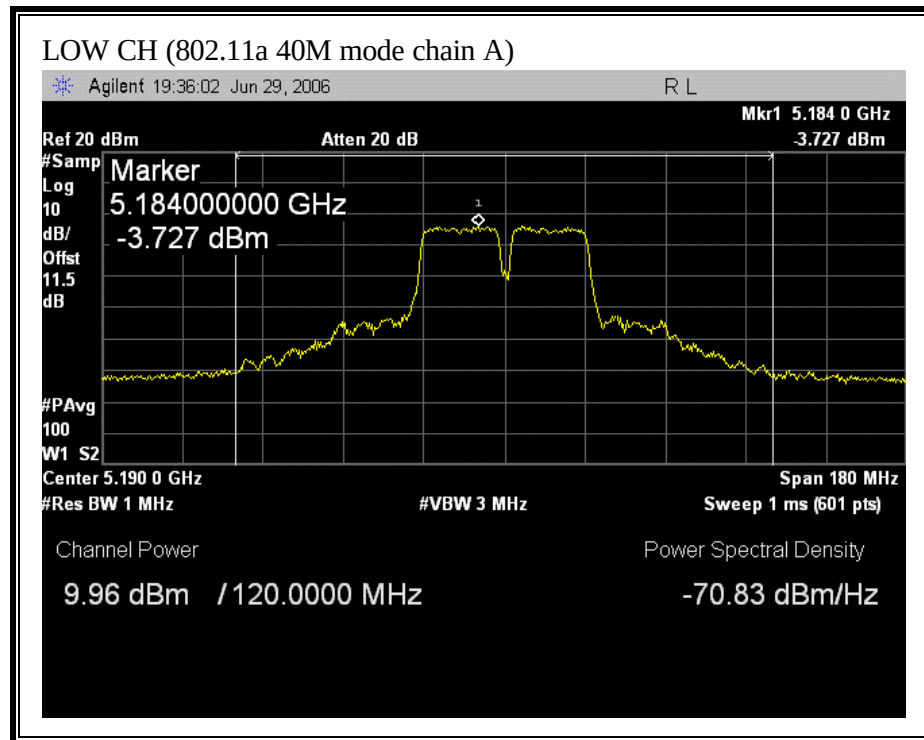


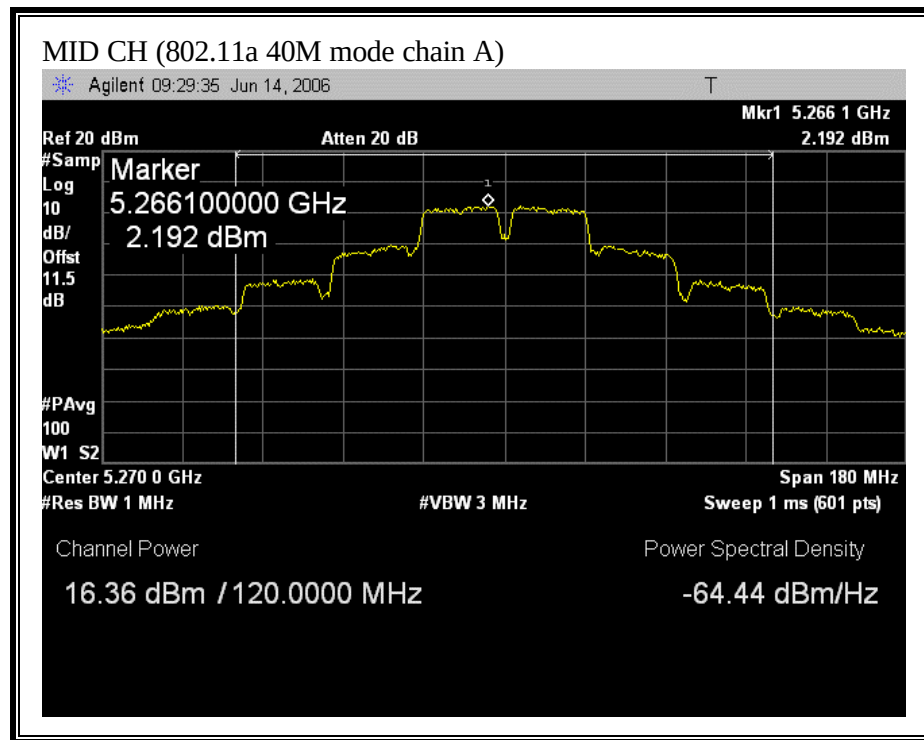


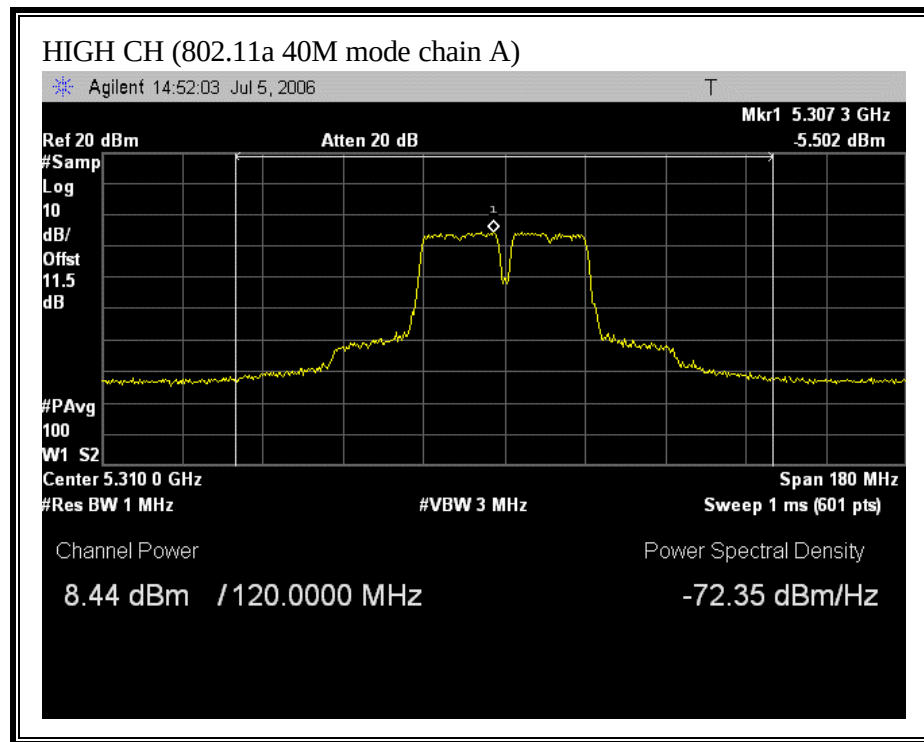


(802.11a 40M MODE CHAIN B)

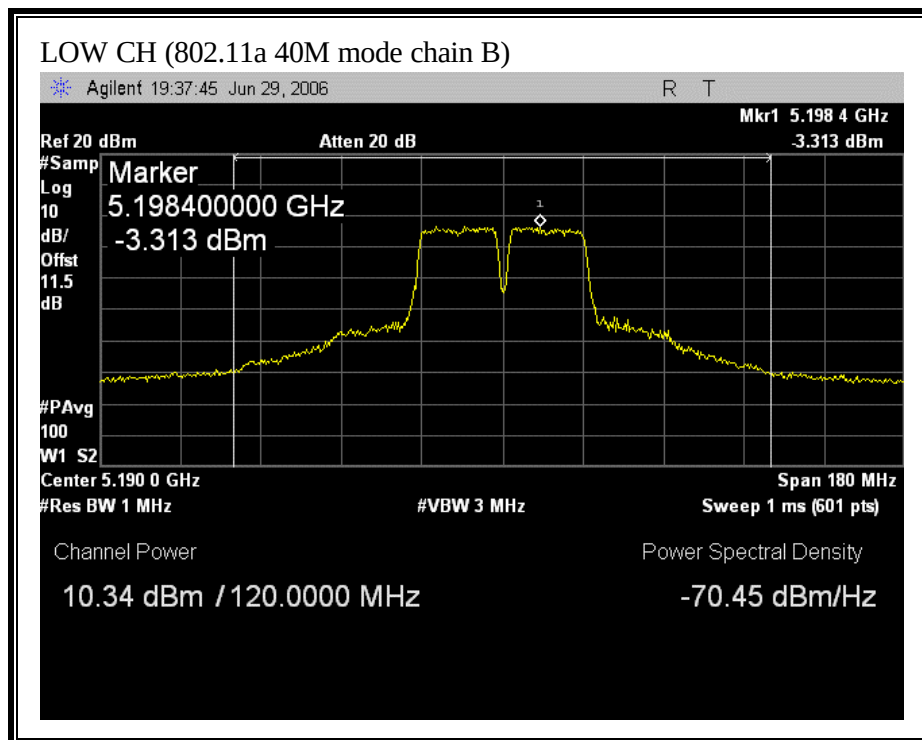


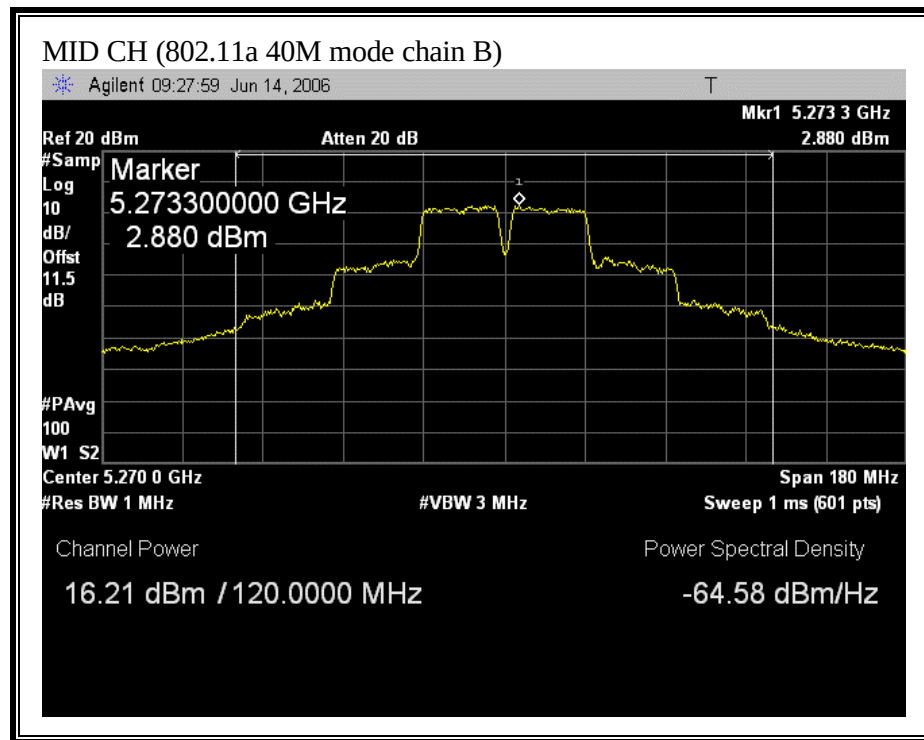


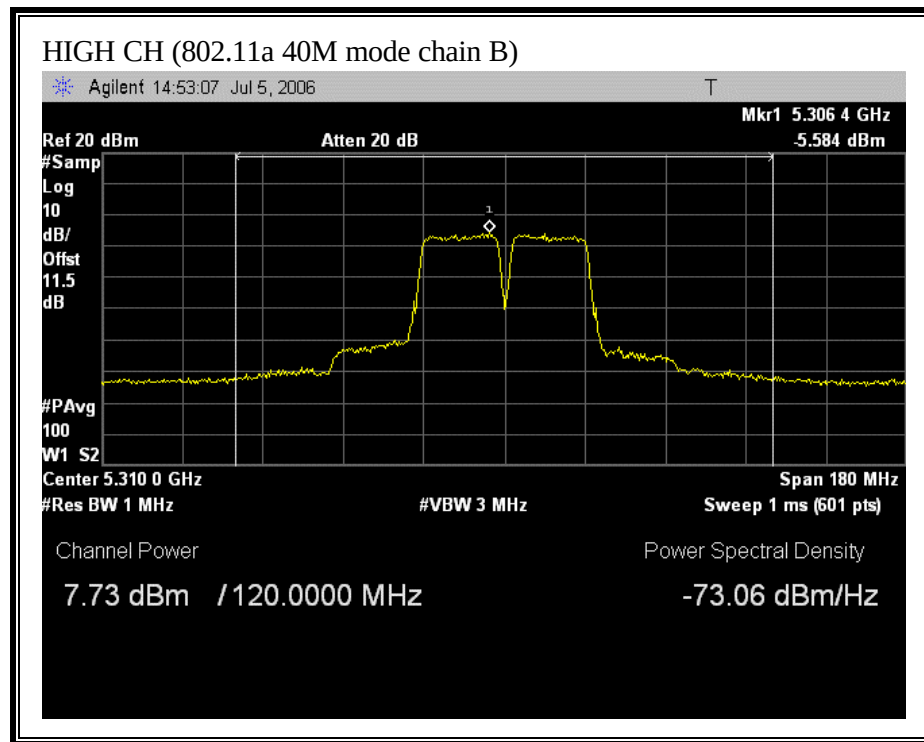


(802.11n HT20 MODE CHAIN A)

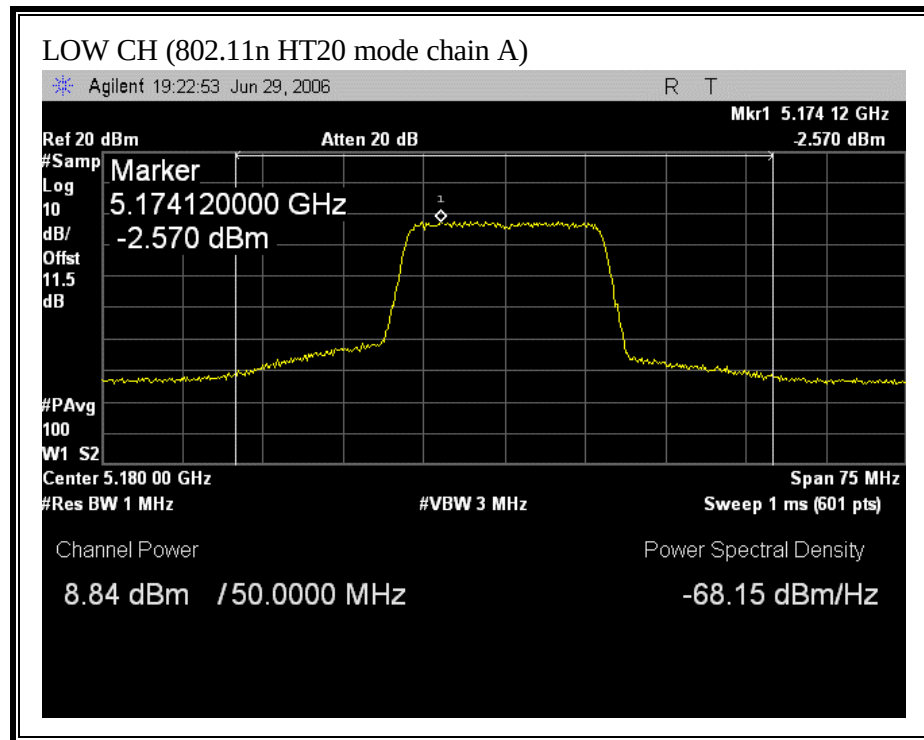


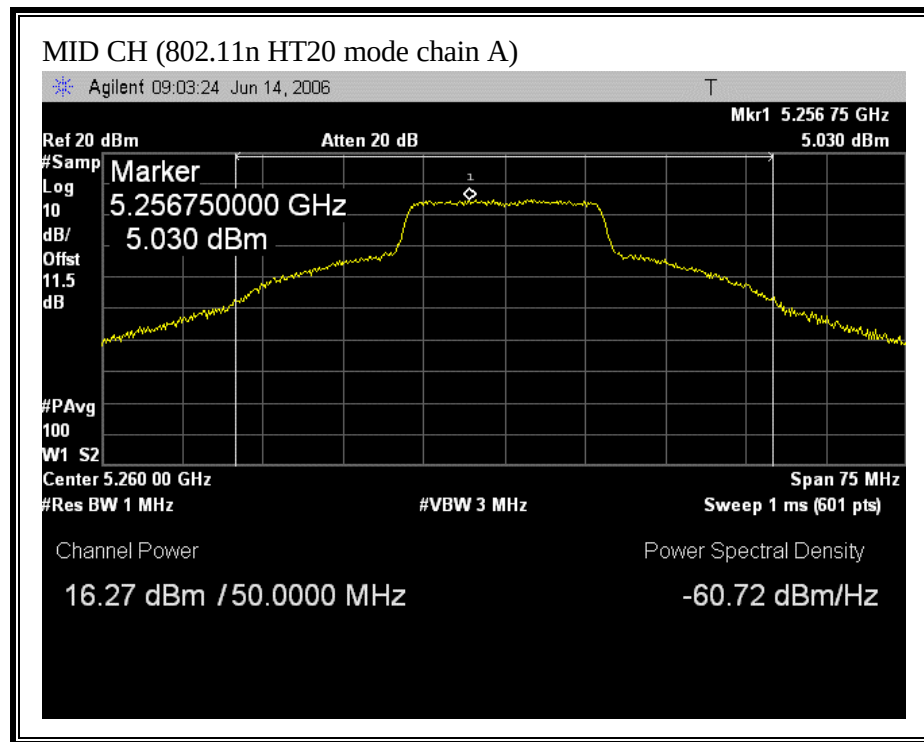


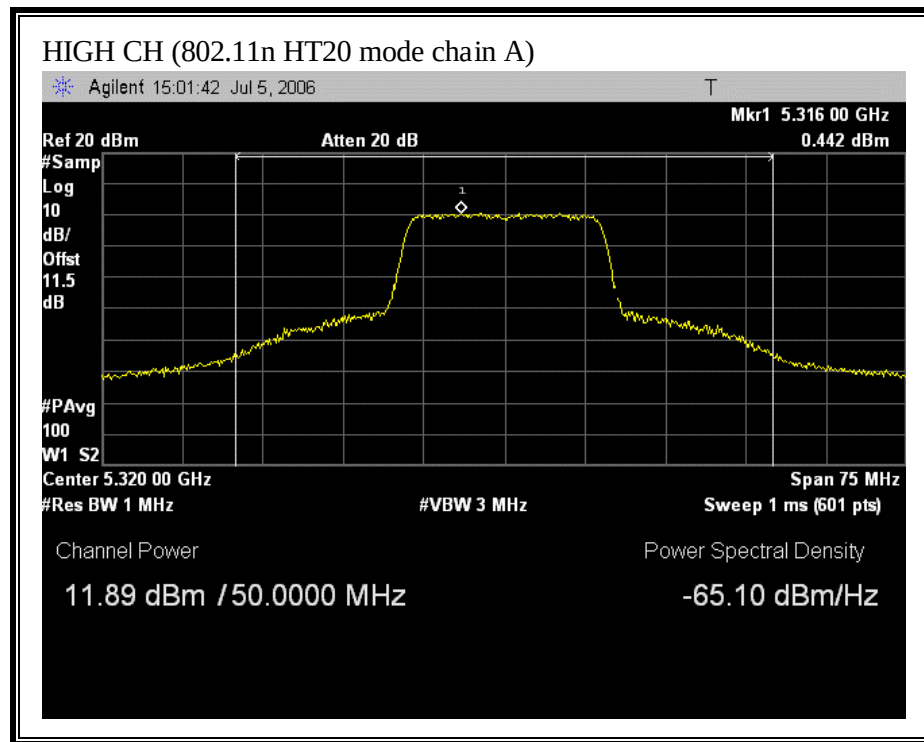


(802.11 HT20 MODE CHAIN B)

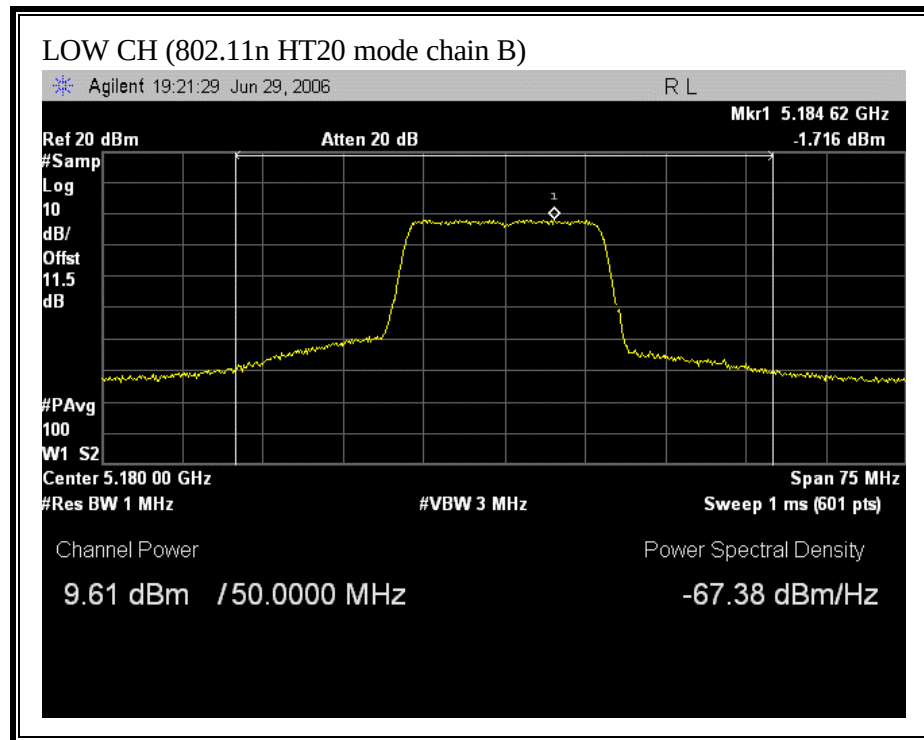


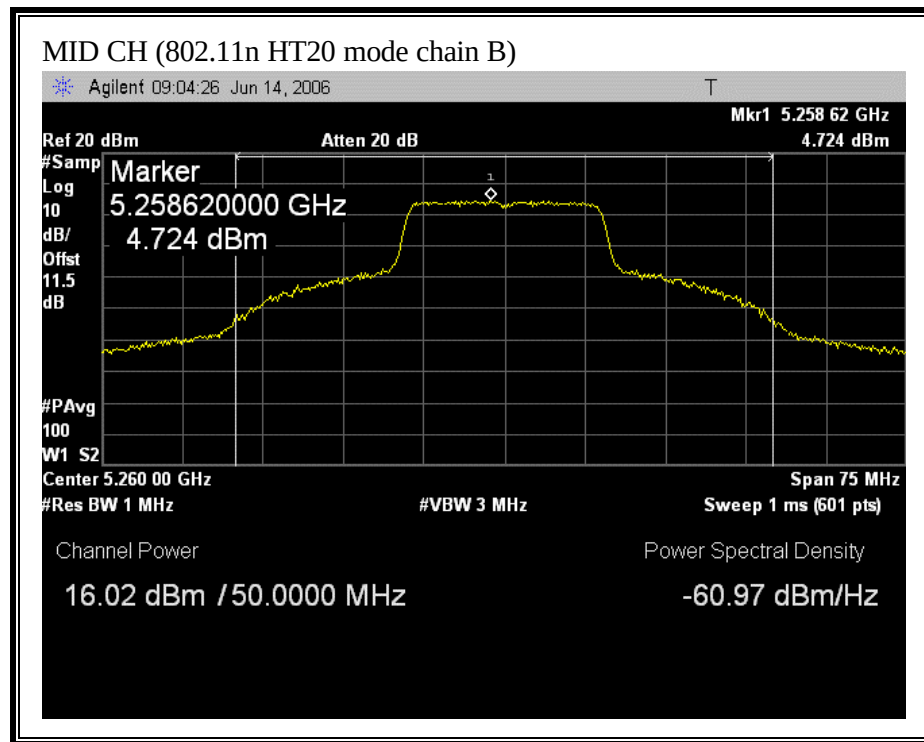


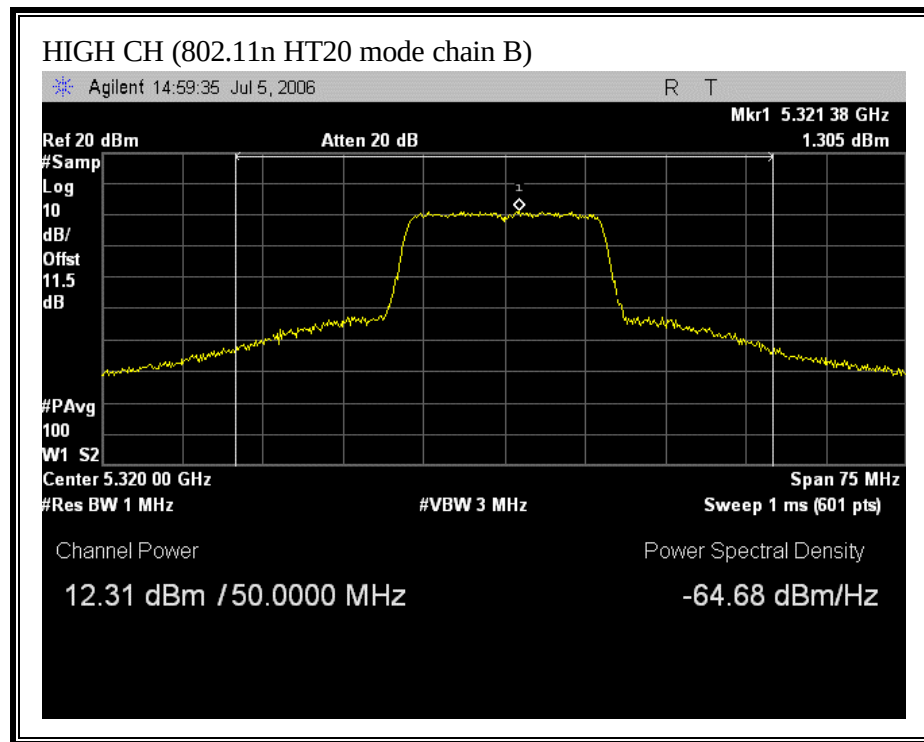


(802.11 HT40 MODE CHAIN A)

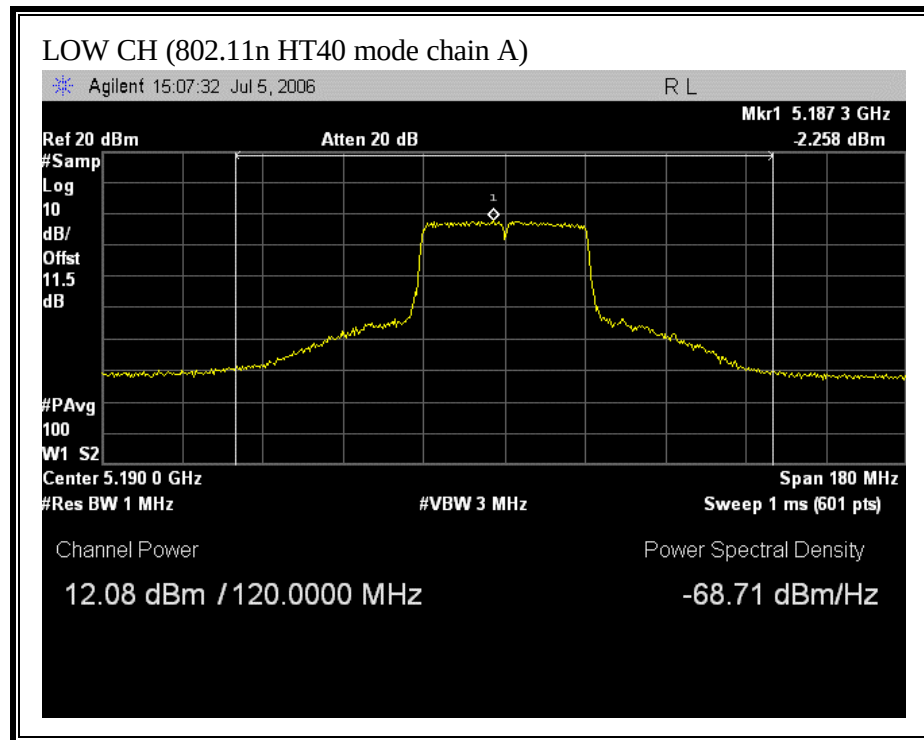


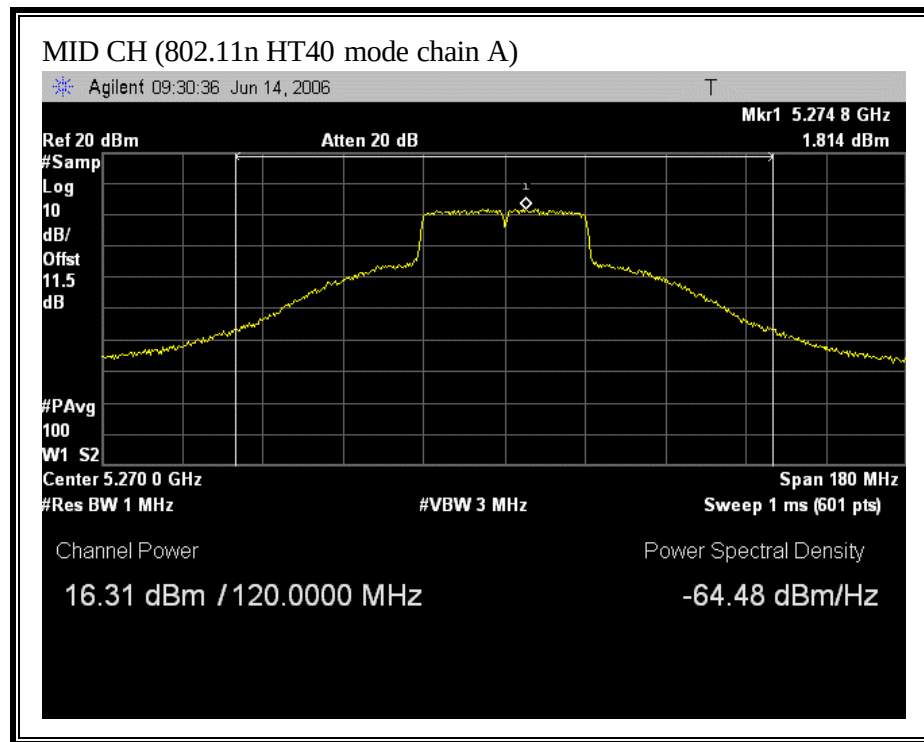


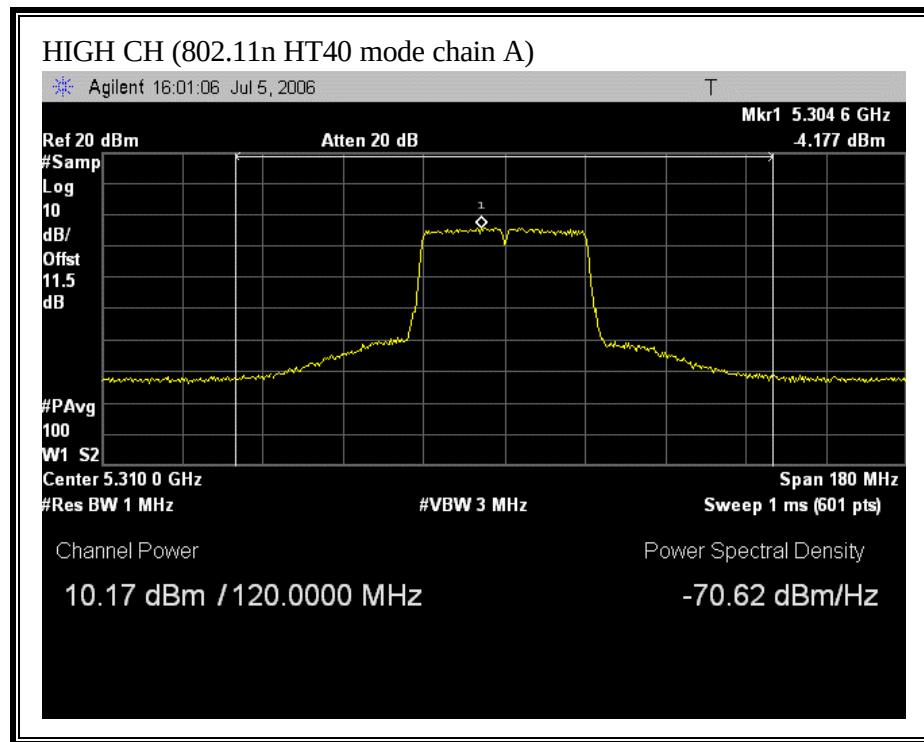

(802.11 HT40 MODE CHAIN B)

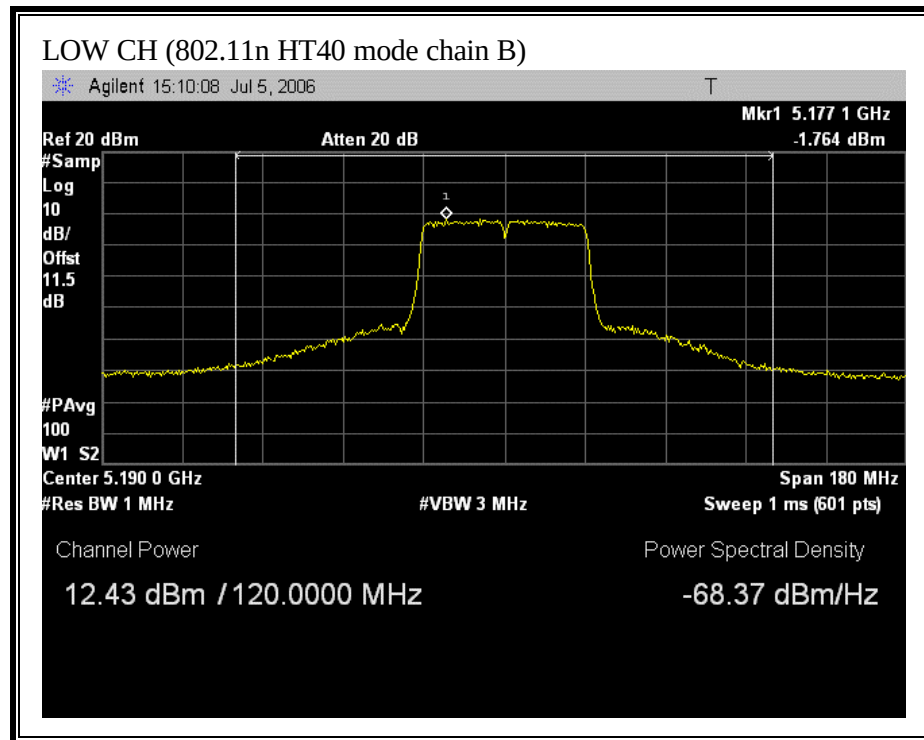


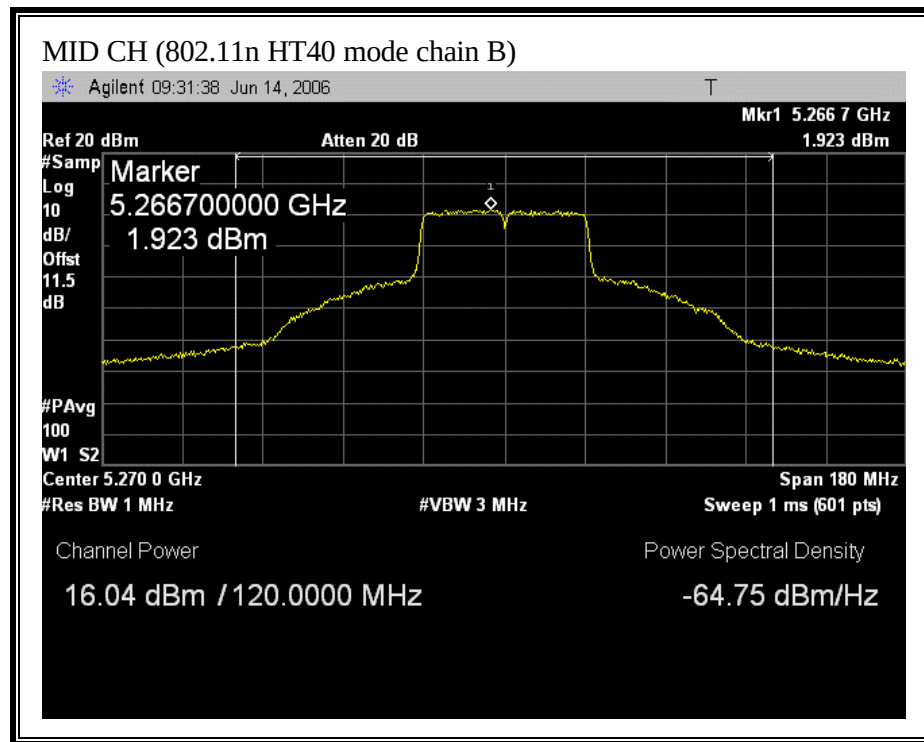


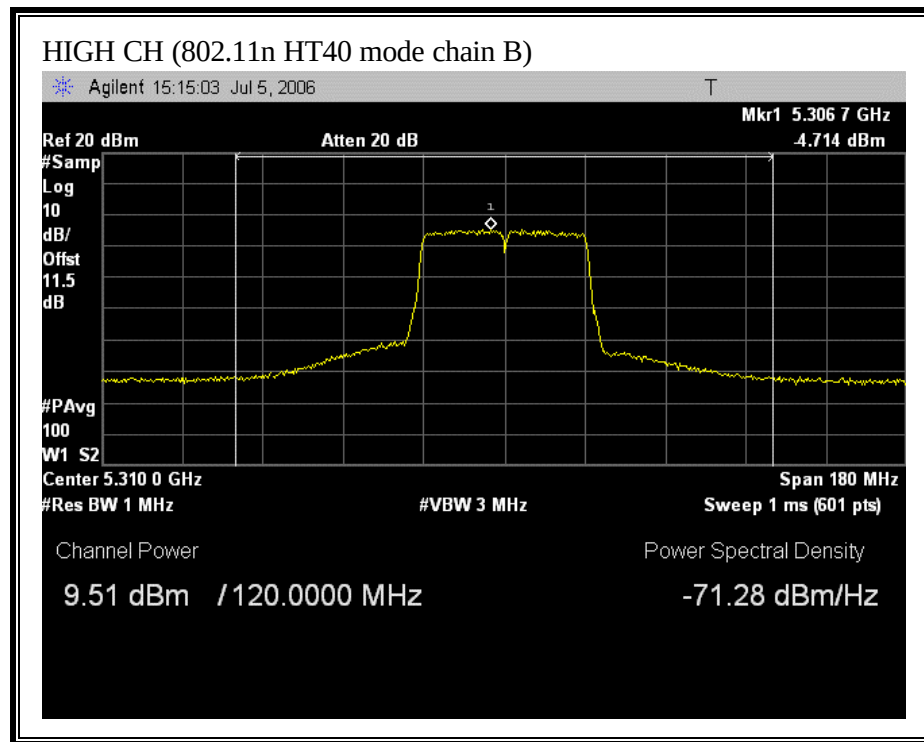



PLOTS USING COMBINER


(802.11a 20M MODE)

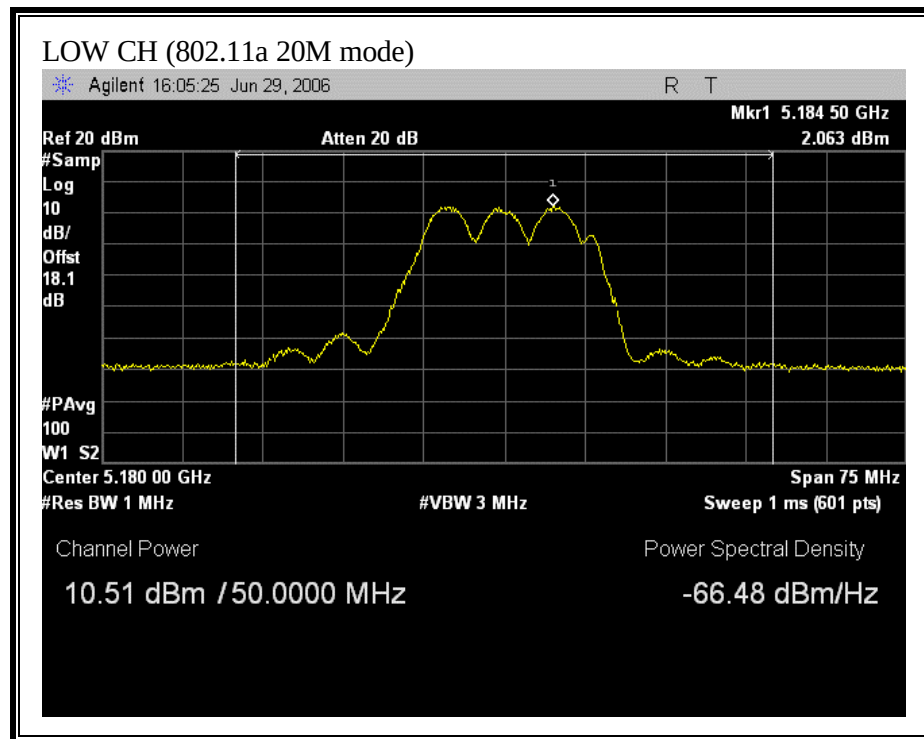

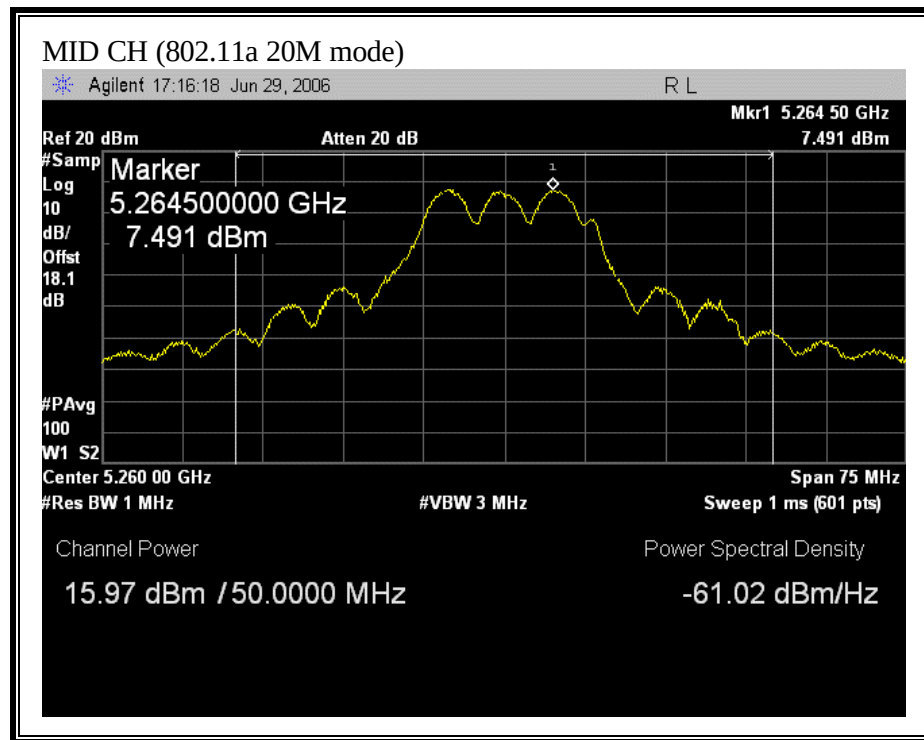


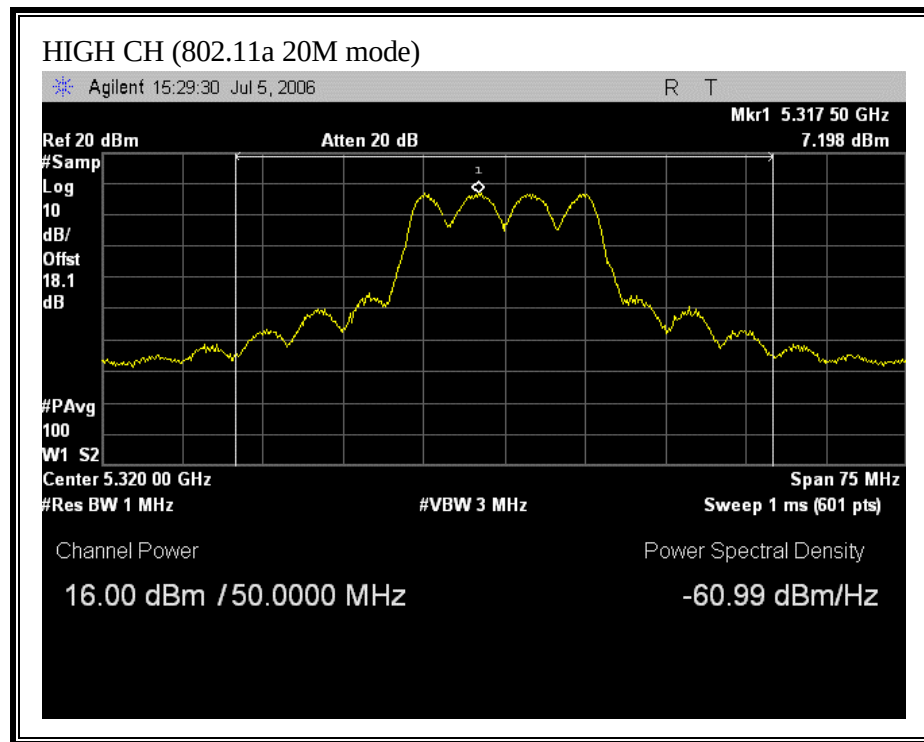


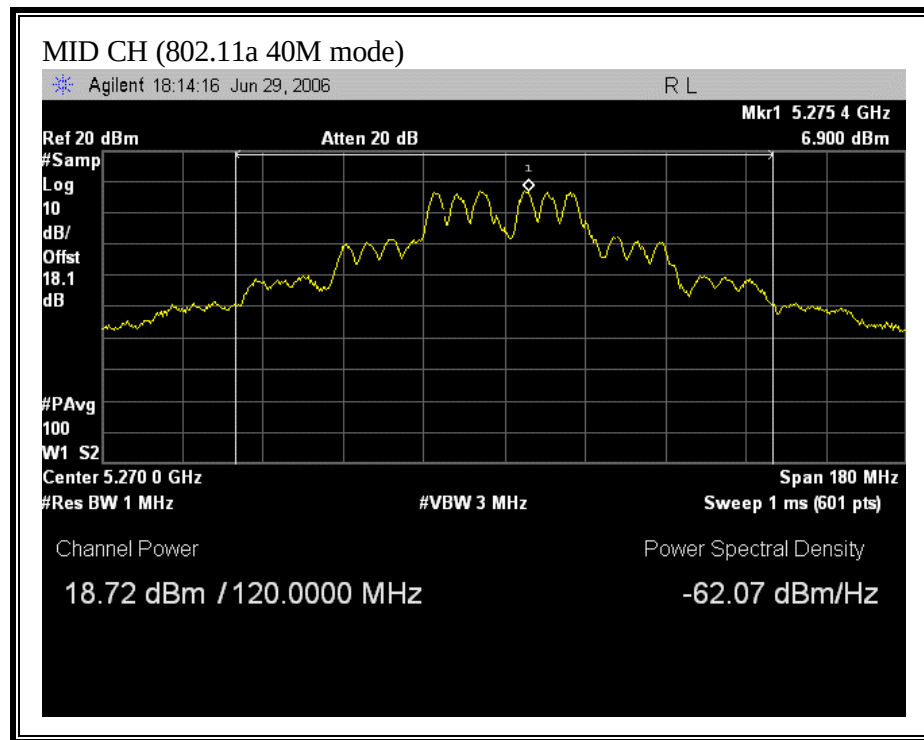


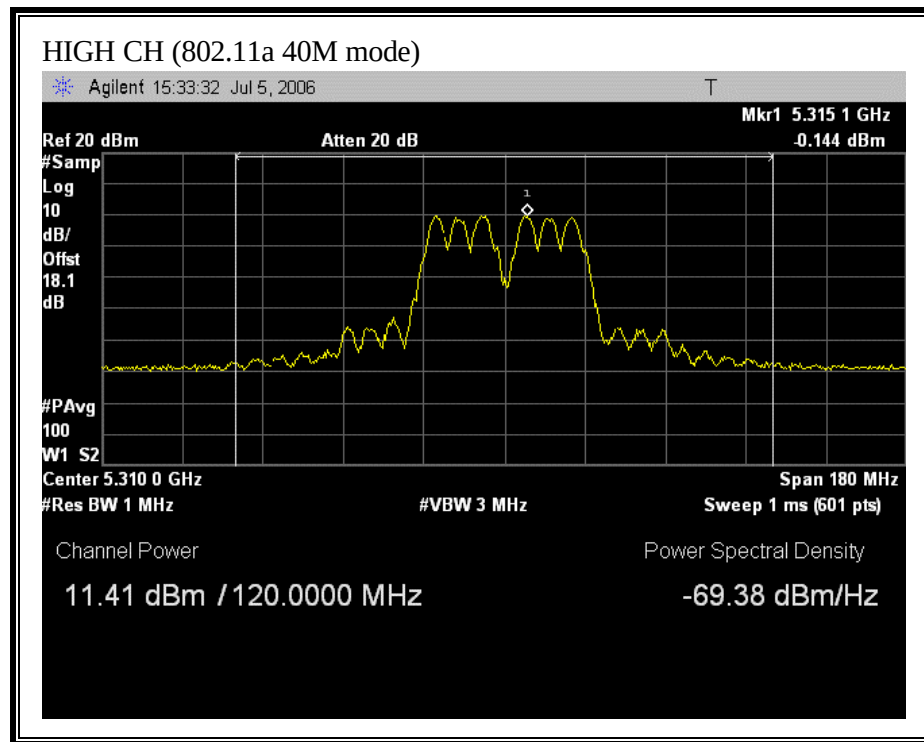


(802.11n HT20 MODE)

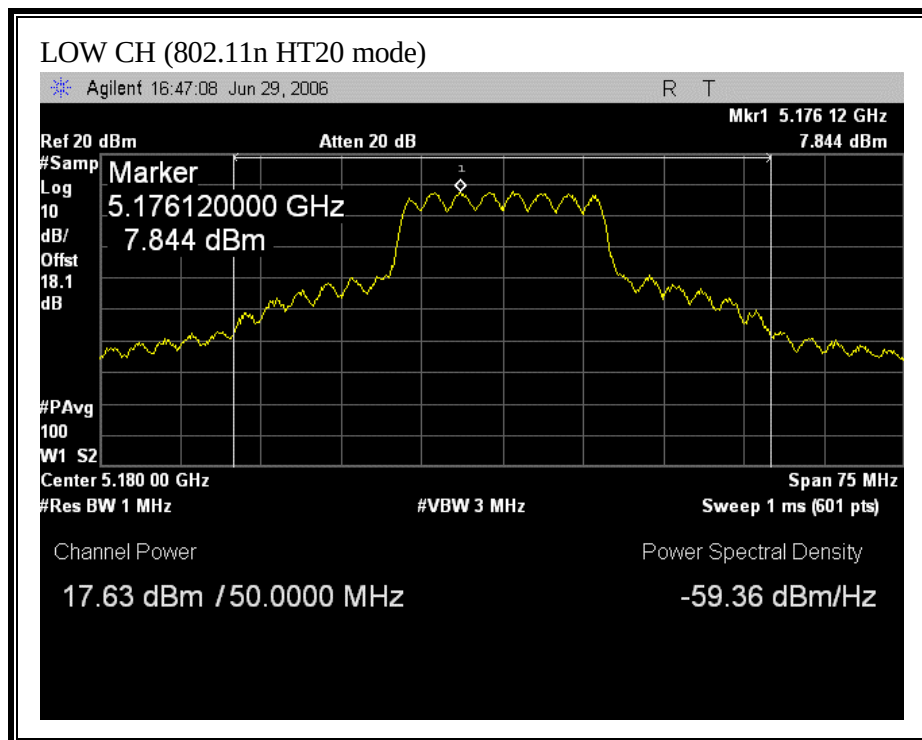


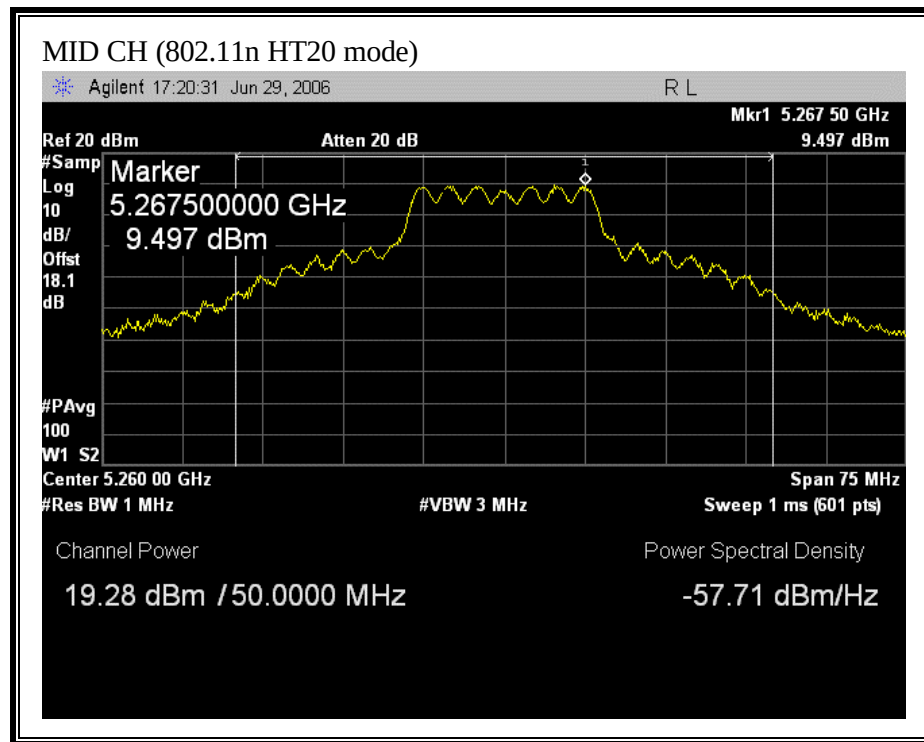


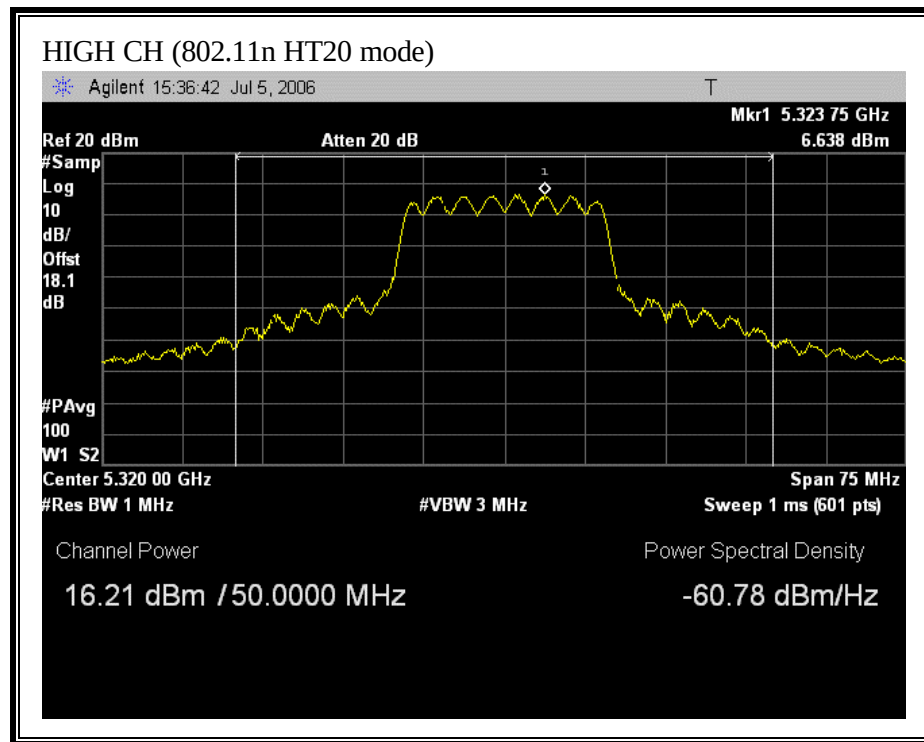

(802.11 HT40 MODE)

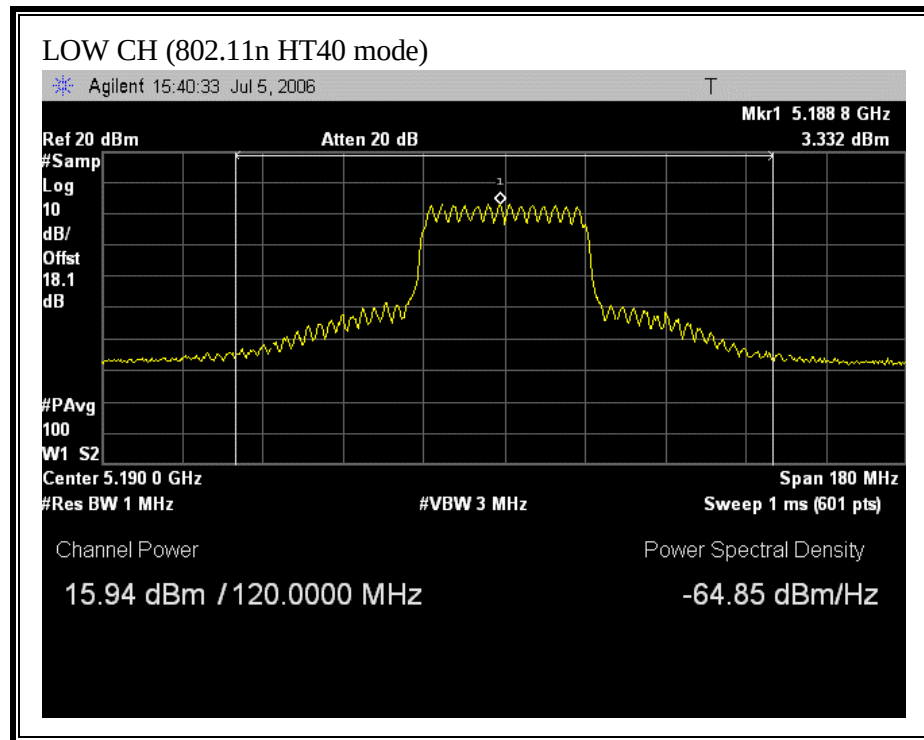

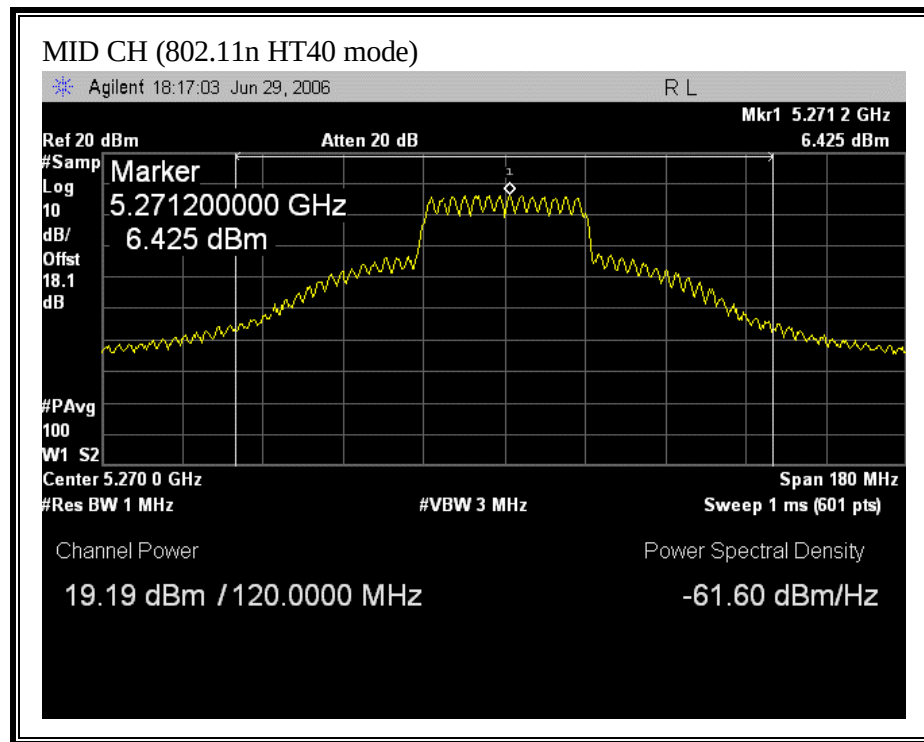

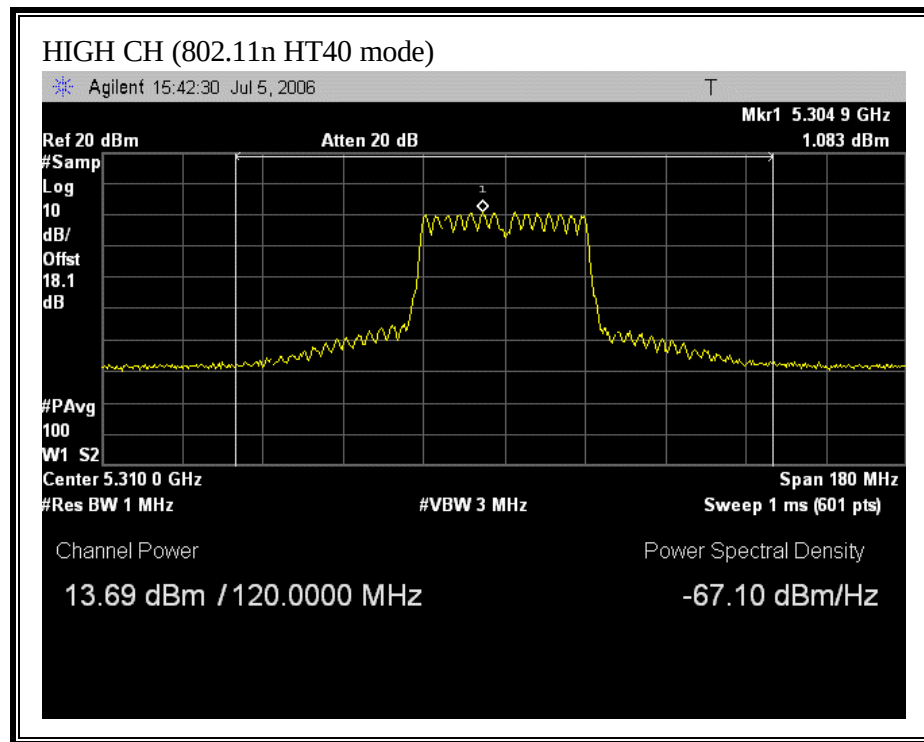

7.1.5. PEAK EXCURSION

LIMIT

§15.407 (a) (6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

RESULTS

No non-compliance noted:

Mode Channel	Frequency (MHz)	Peak Excursion Chain A (dBm)	Peak Excursion Chain B (dBm)	Limit (dBm)	Worst Case Margin (dB)
-------------------------	---------------------------------	---	---	-----------------------------	---

802.11a 20MHz Mode

Low	5180	11.98	10.31	13	-1.02
Middle	5260	11.45	11.28	13	-1.55
High	5320	11.81	11.97	13	-1.03

802.11a 40MHz Mode

Low	5180	12.40	10.42	13	-0.60
Middle	5260	12.55	8.67	13	-0.45
High	5320	12.22	12.23	13	-0.77


802.11n HT20 Mode


Low	5190	10.81	12.27	13	-0.73
Middle	5260	10.40	12.41	13	-0.59
High	5310	11.96	11.14	13	-1.04


802.11n HT40 Mode

Low	5180	10.94	11.67	13	-1.33
Middle	5260	11.77	12.50	13	-0.50
High	5320	12.50	11.21	13	-0.50


(802.11a 20M MODE CHAIN A)

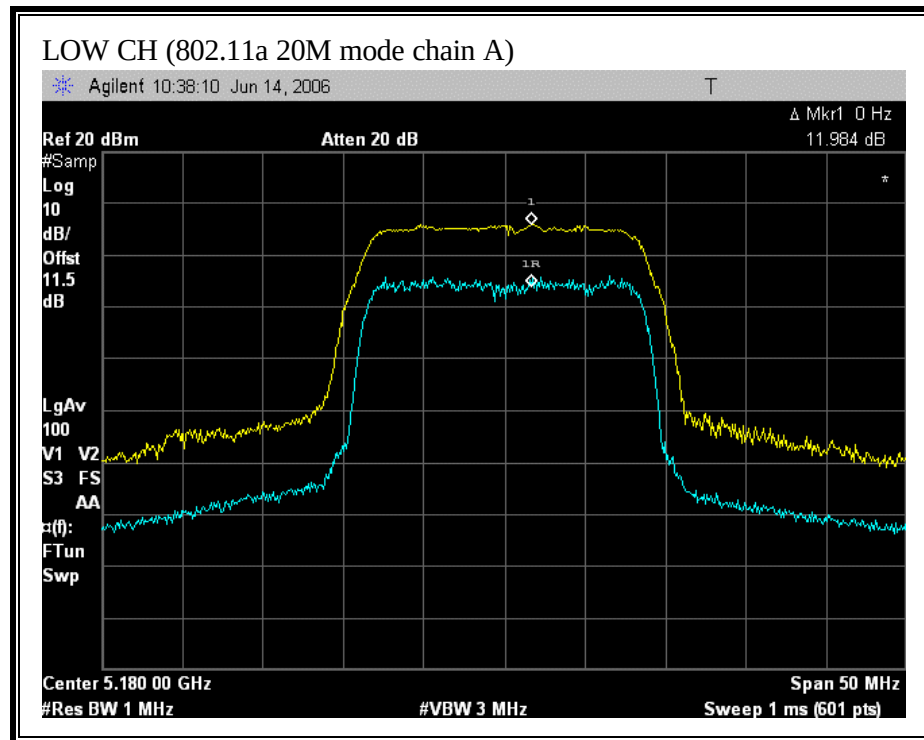


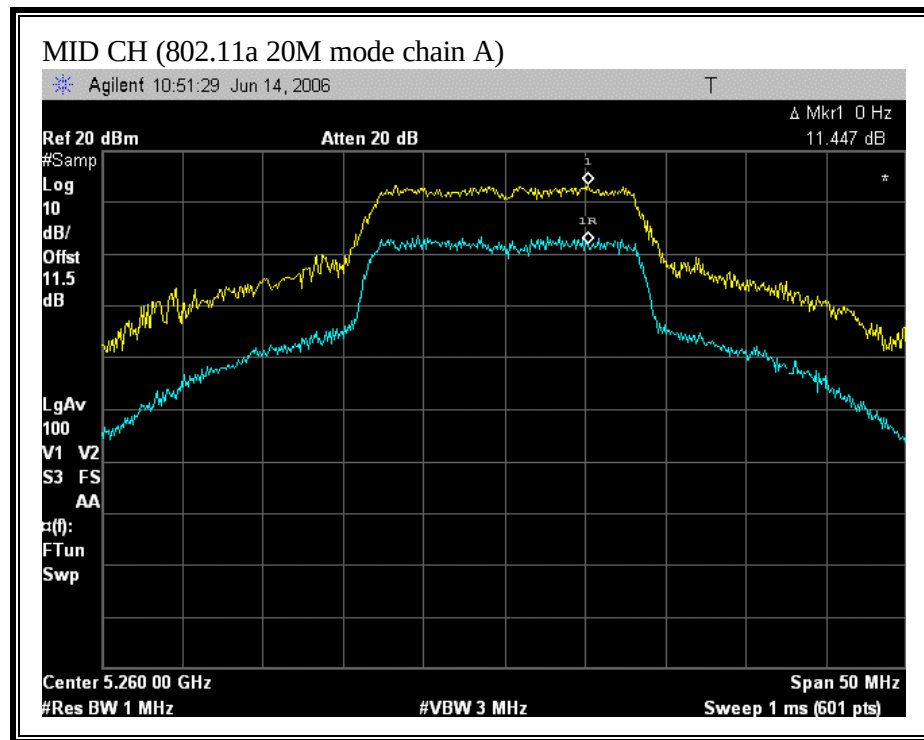


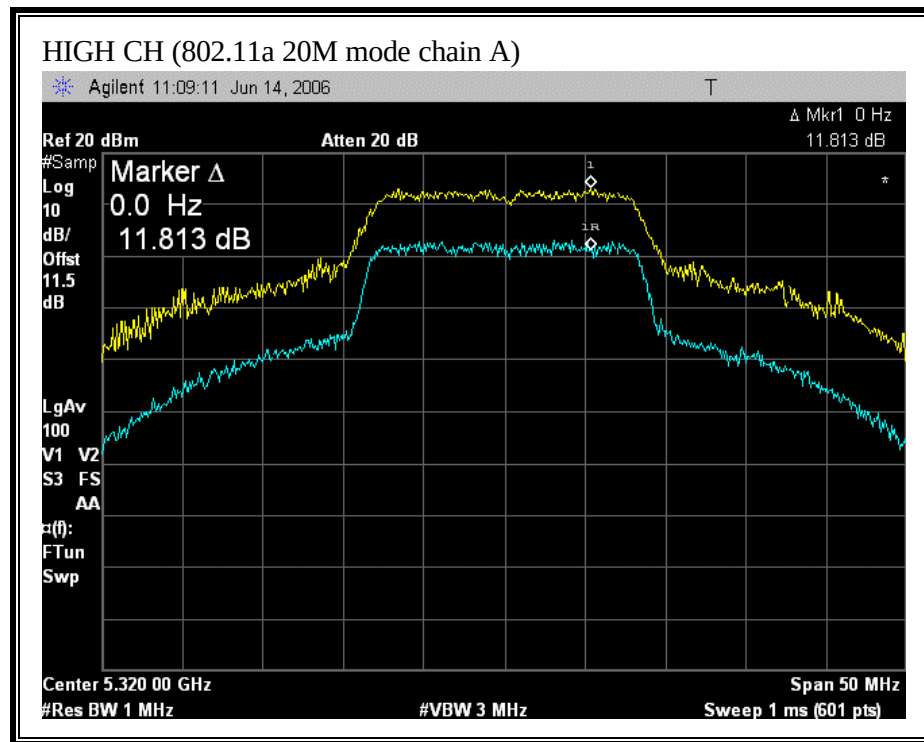


(802.11a 20M MODE CHAIN B)

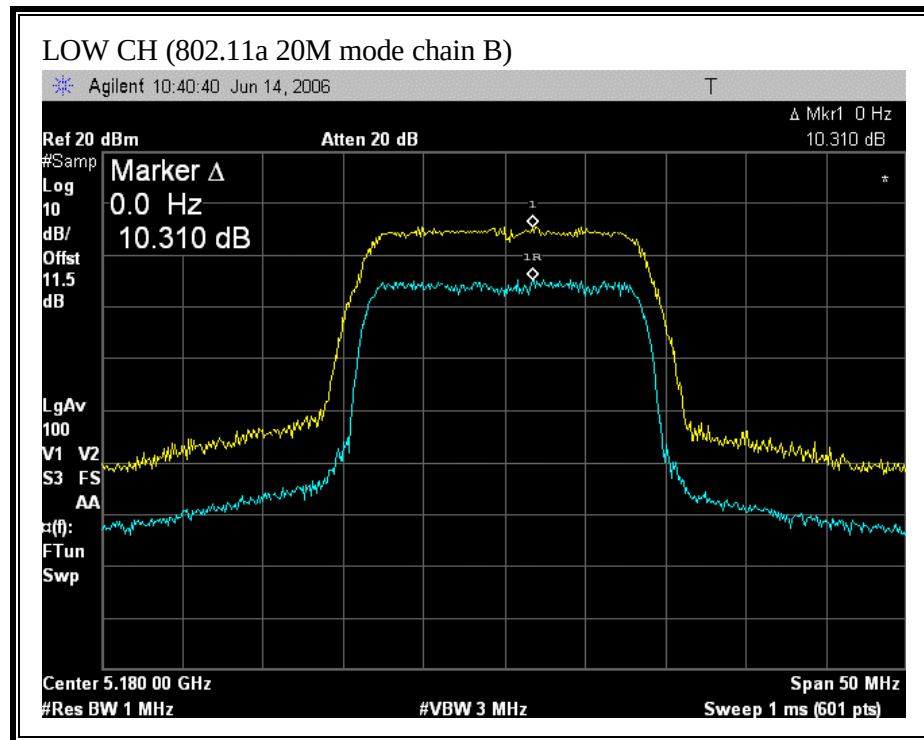


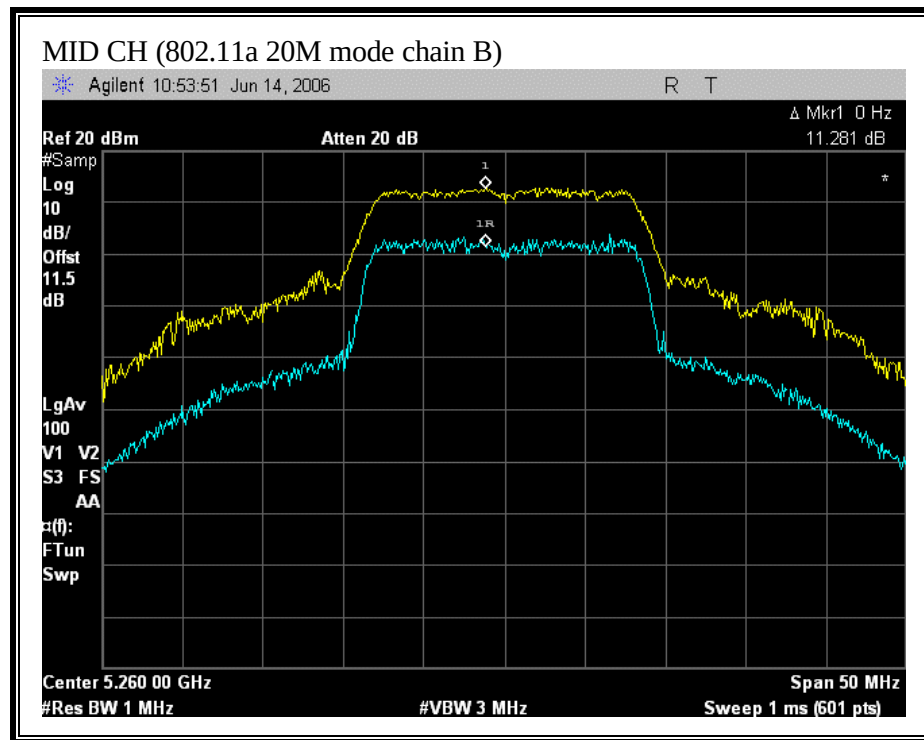


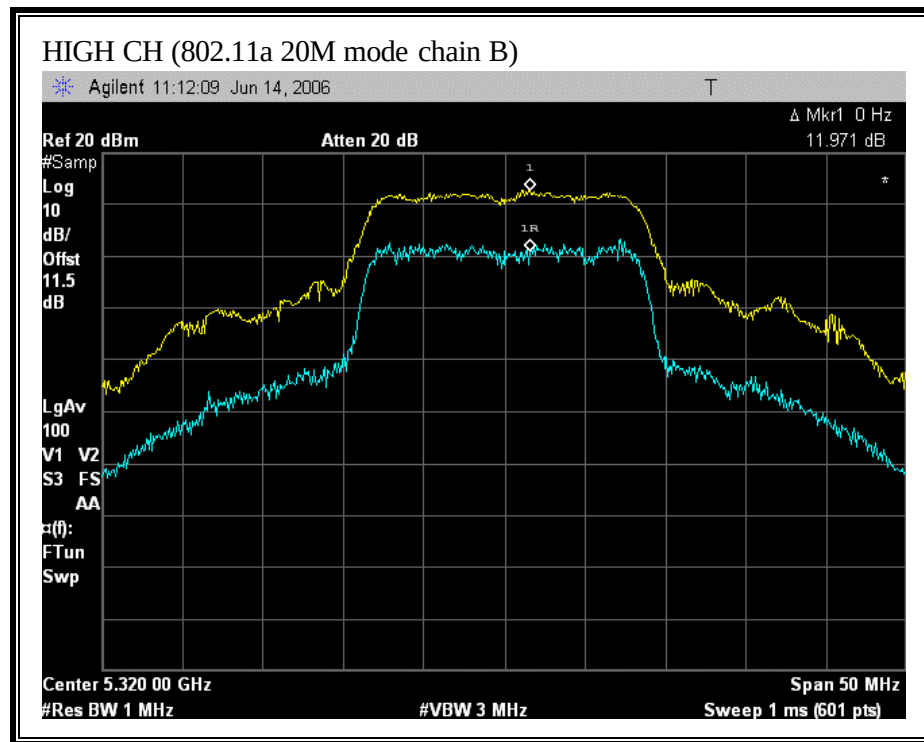


(802.11a 40M MODE CHAIN A)

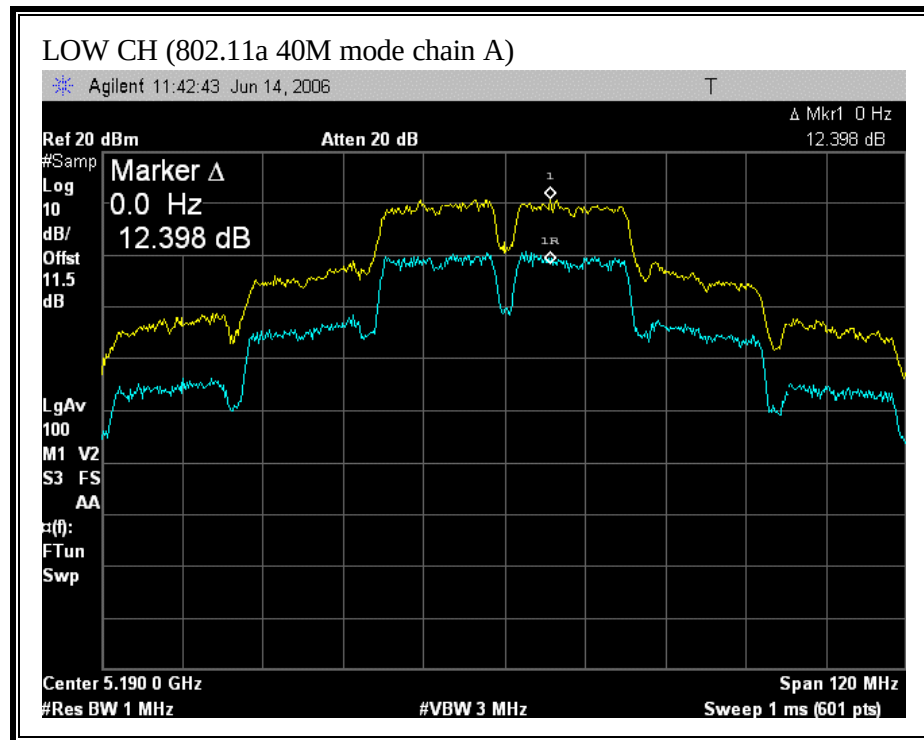


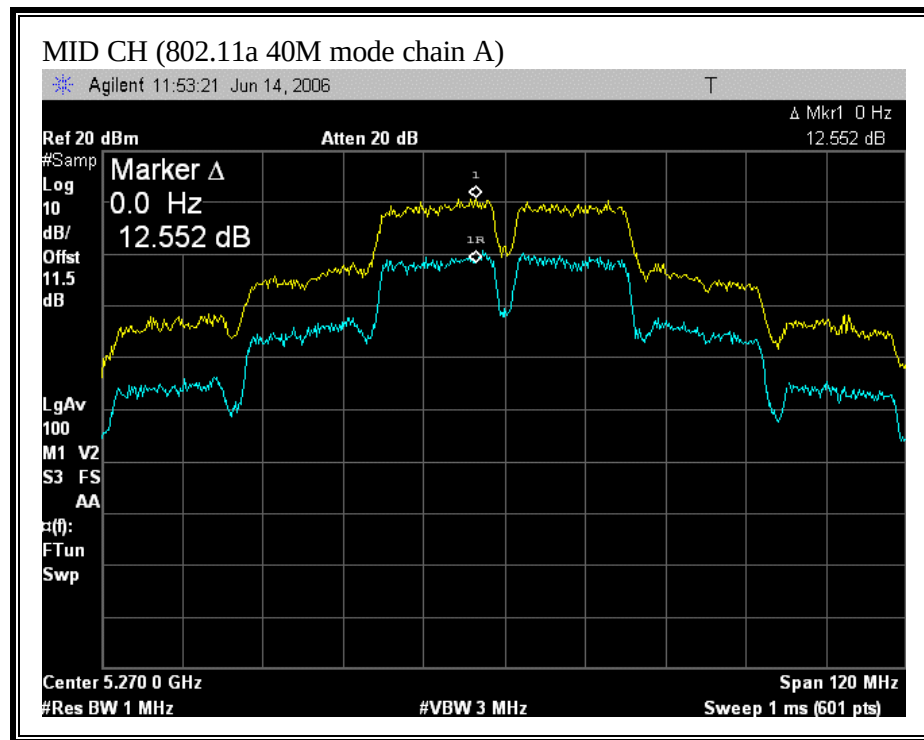


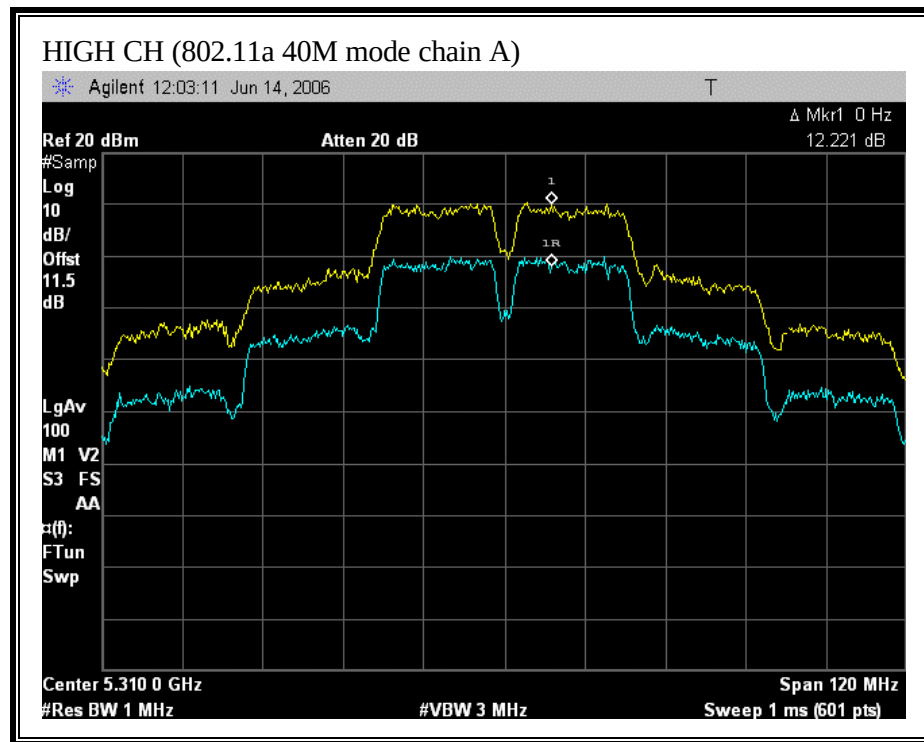


(802.11a 40M MODE CHAIN B)

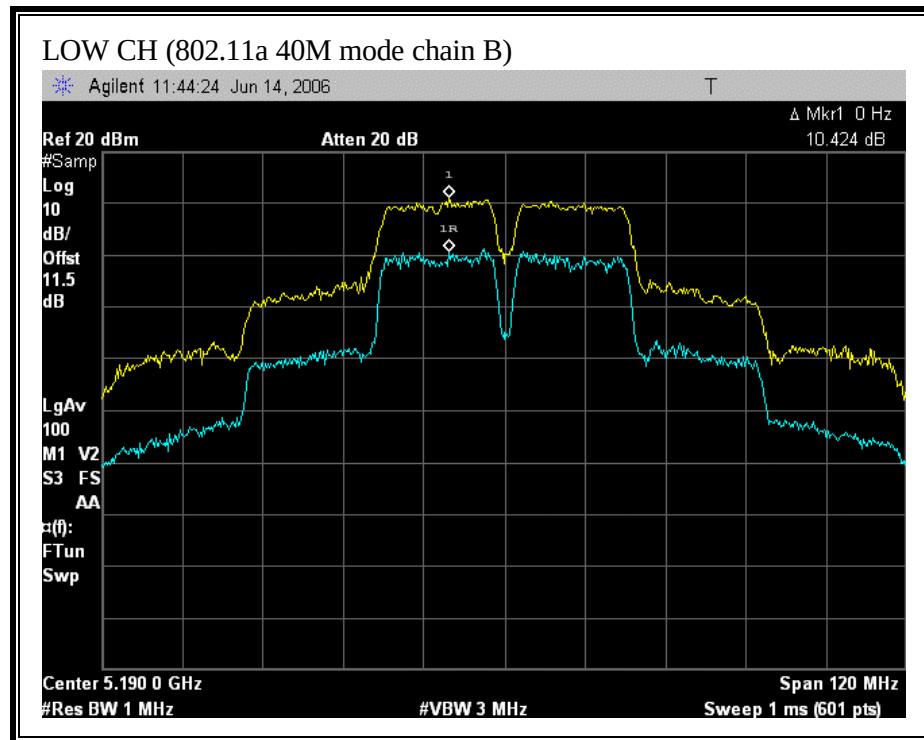


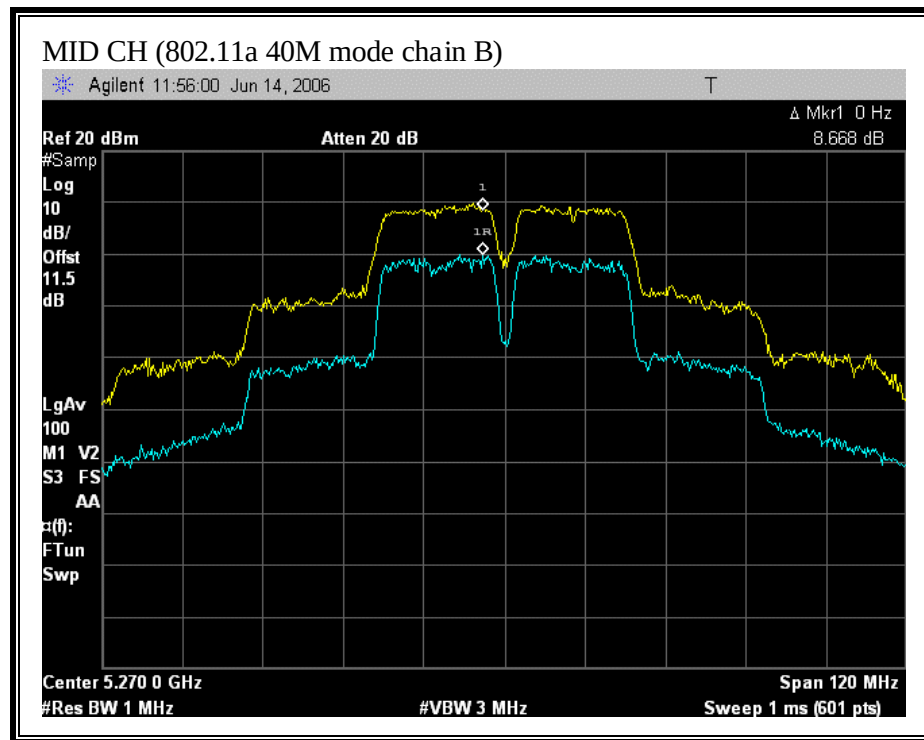


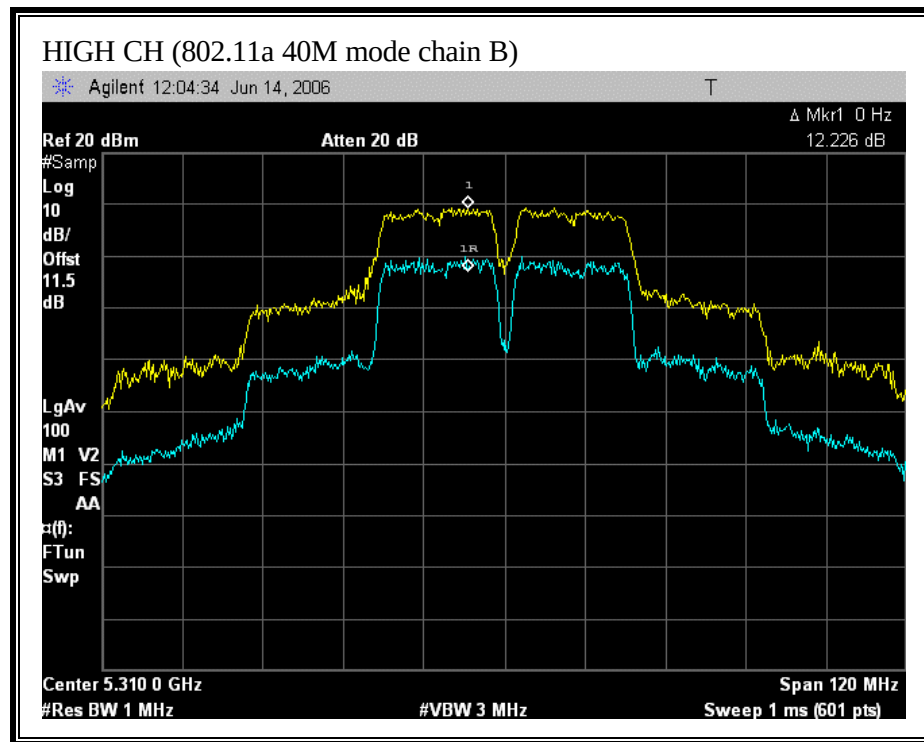


(802.11n HT20 MODE CHAIN A)

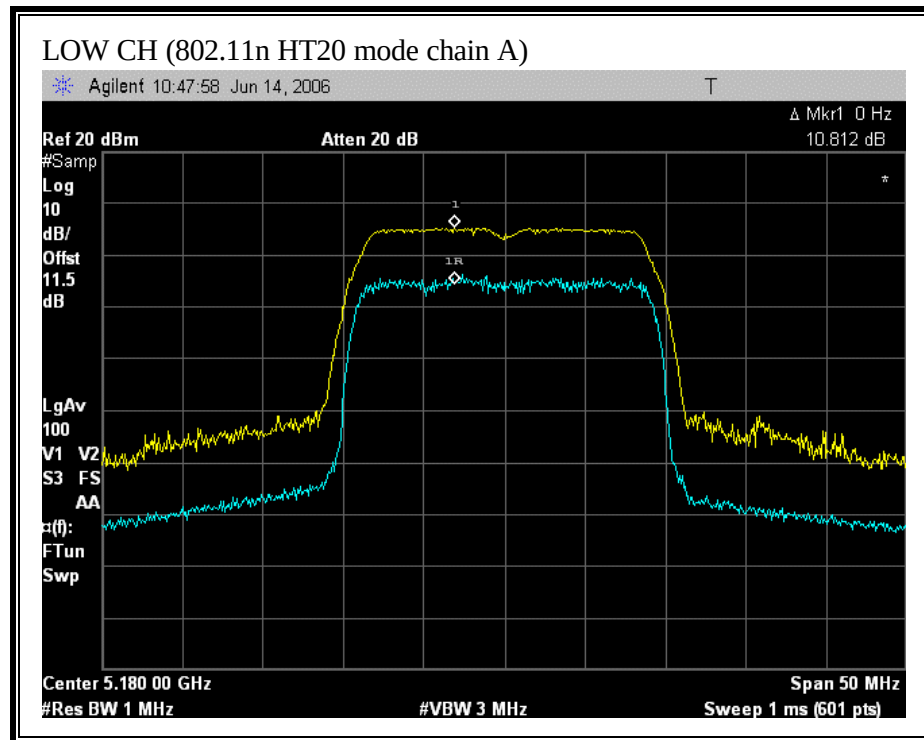


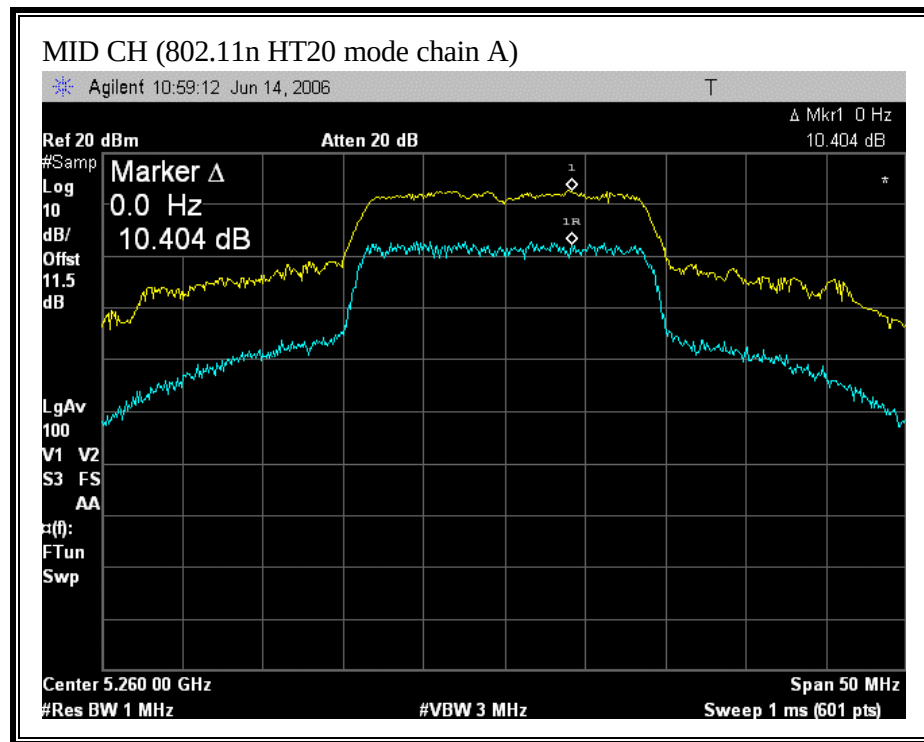


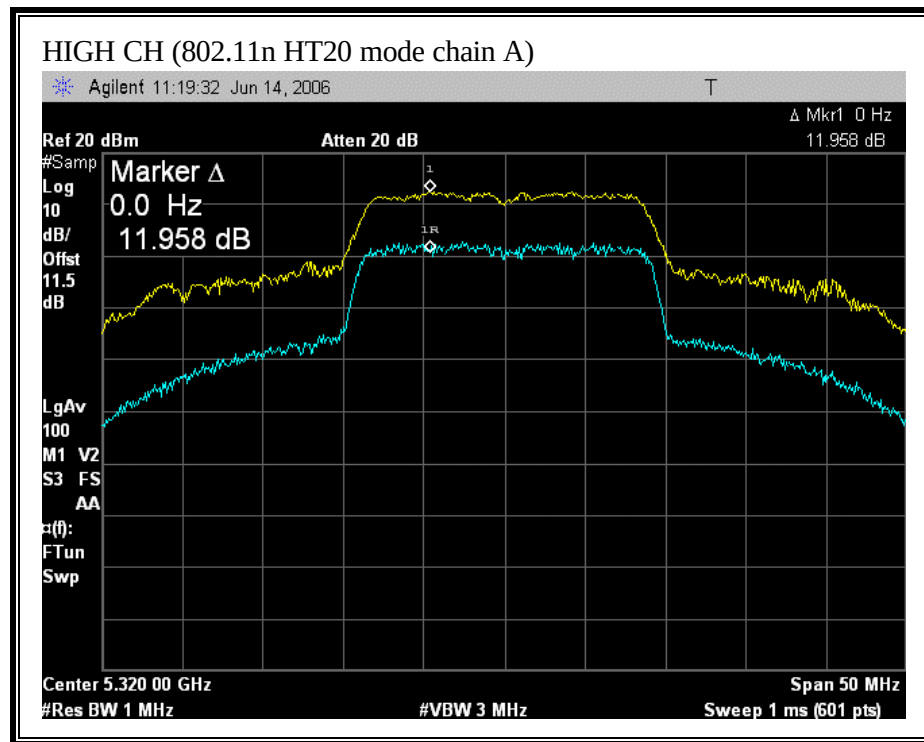


(802.11 HT20 MODE CHAIN B)

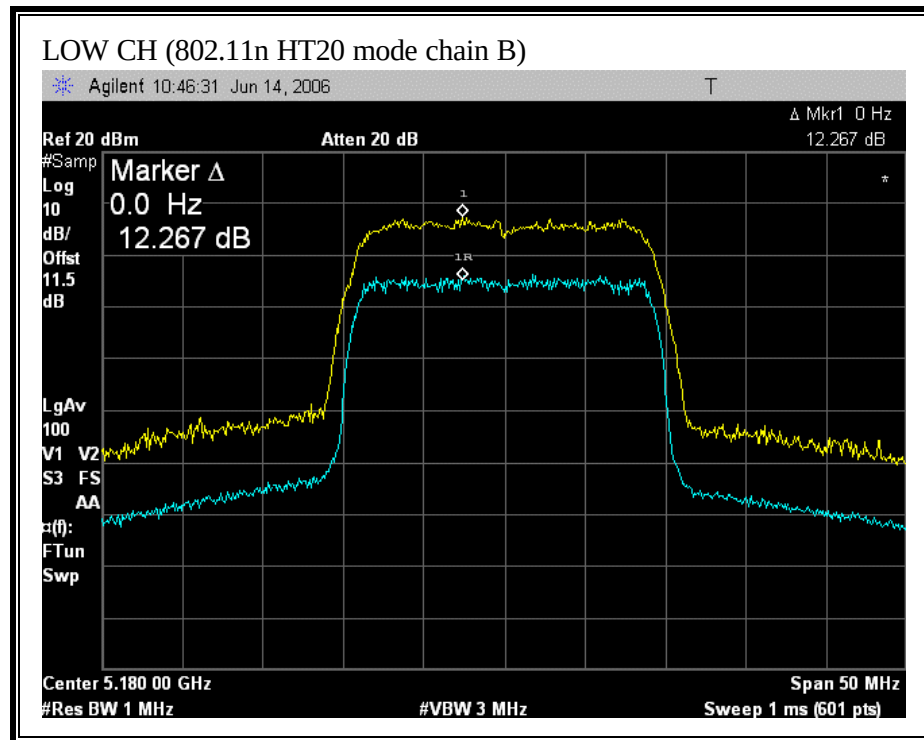


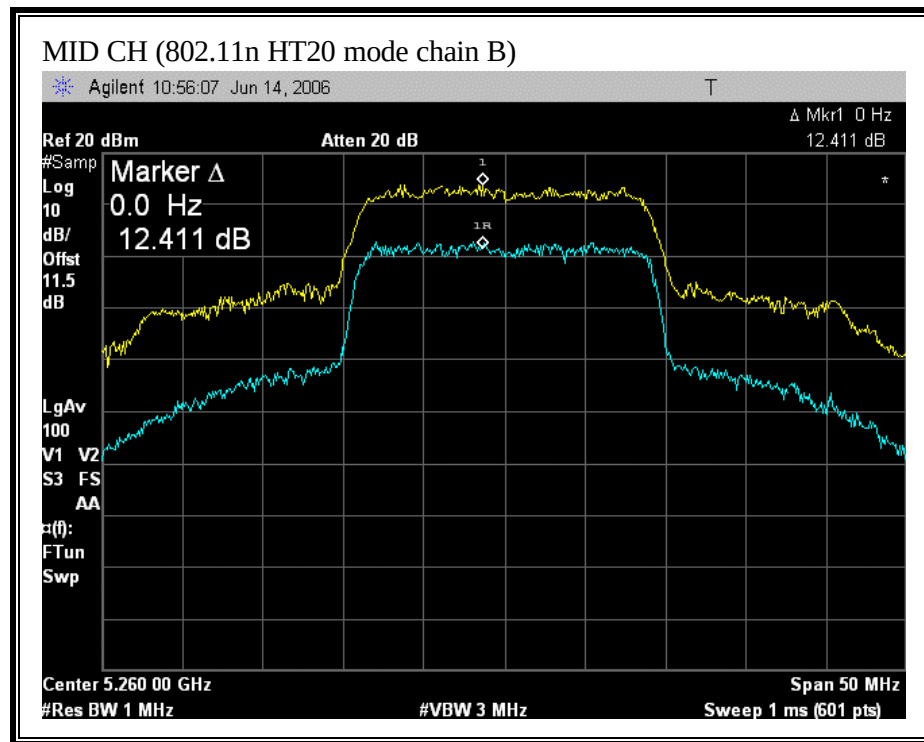


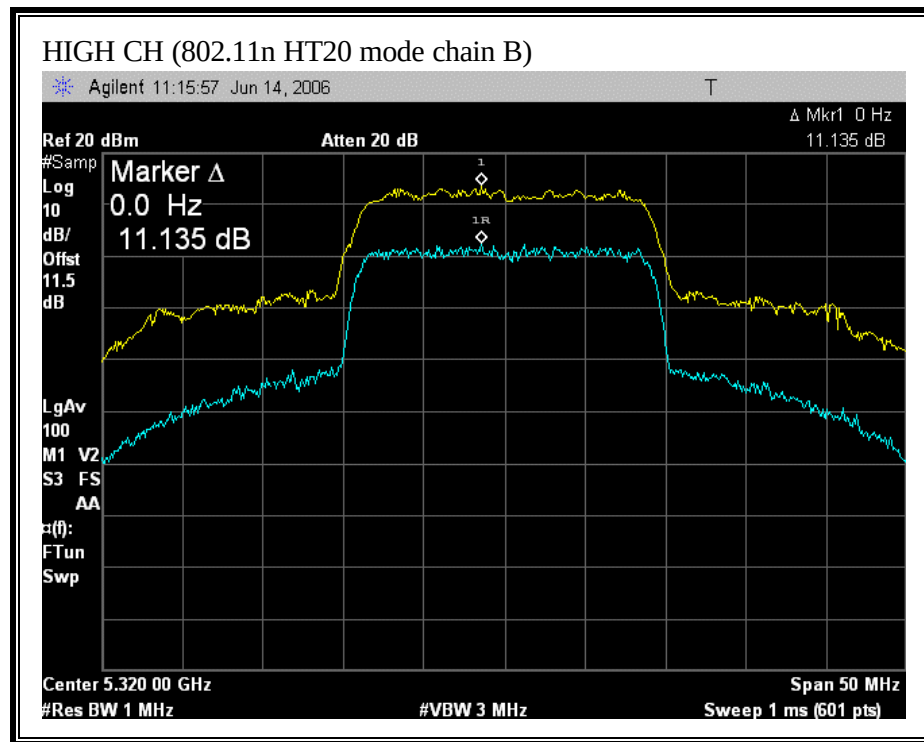


(802.11 HT40 MODE CHAIN A)

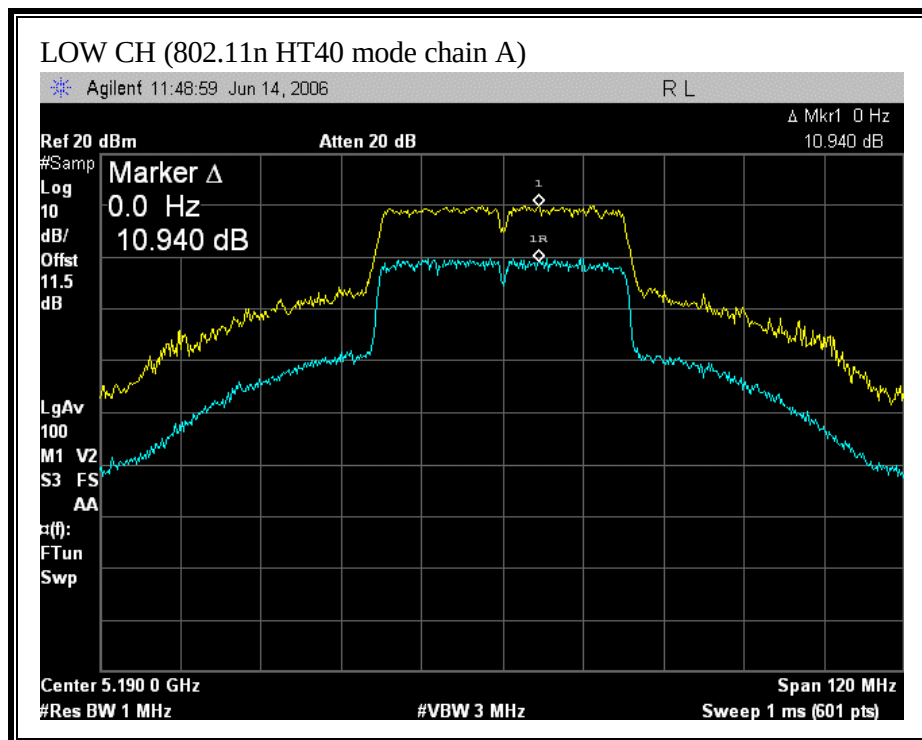


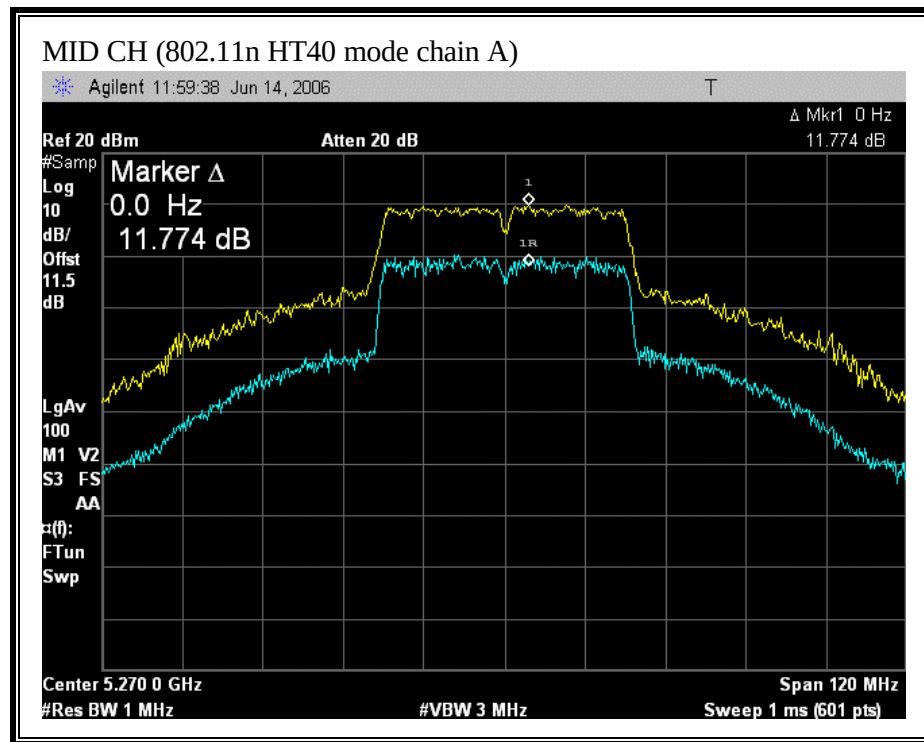


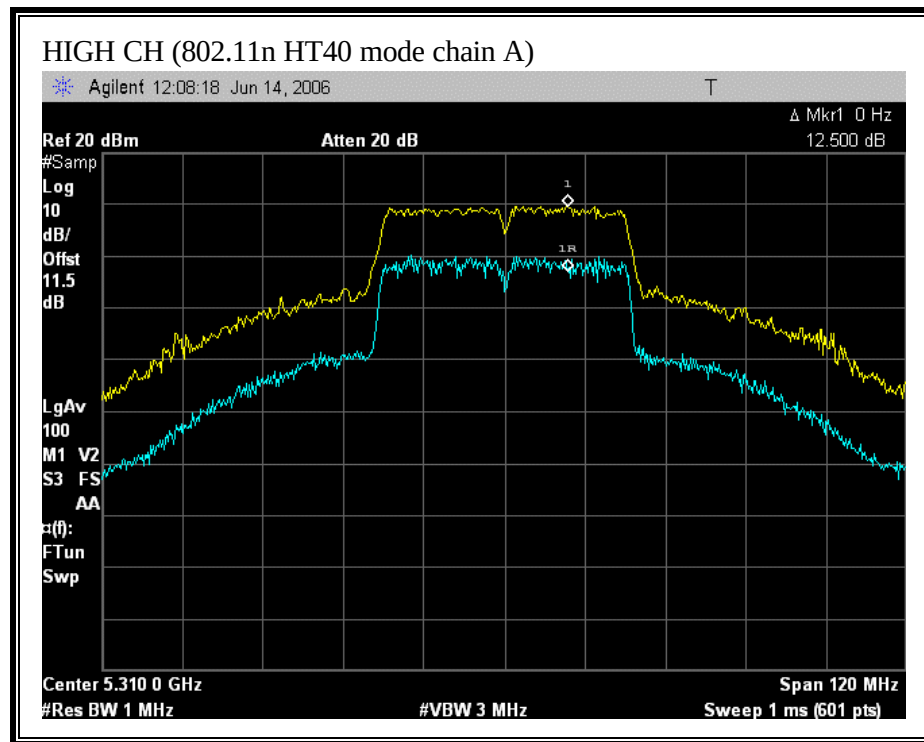

(802.11 HT40 MODE CHAIN B)

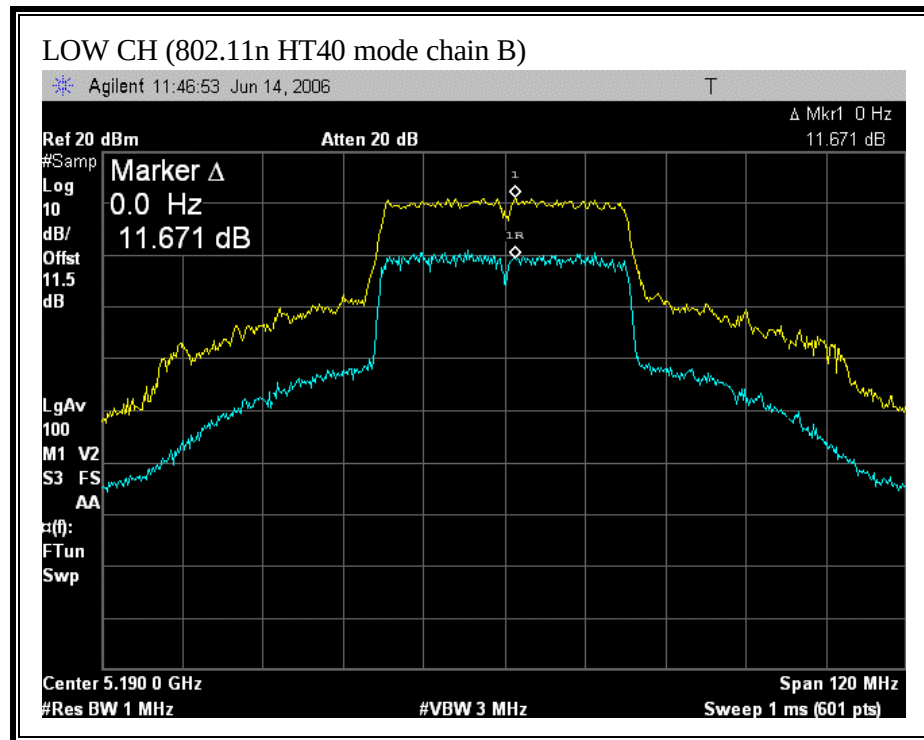

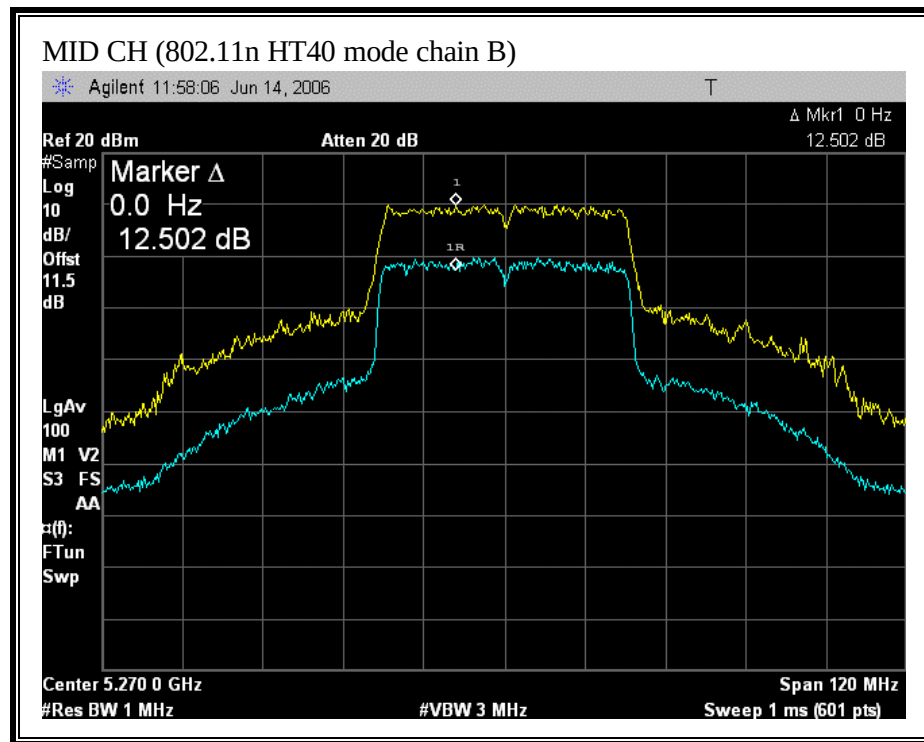

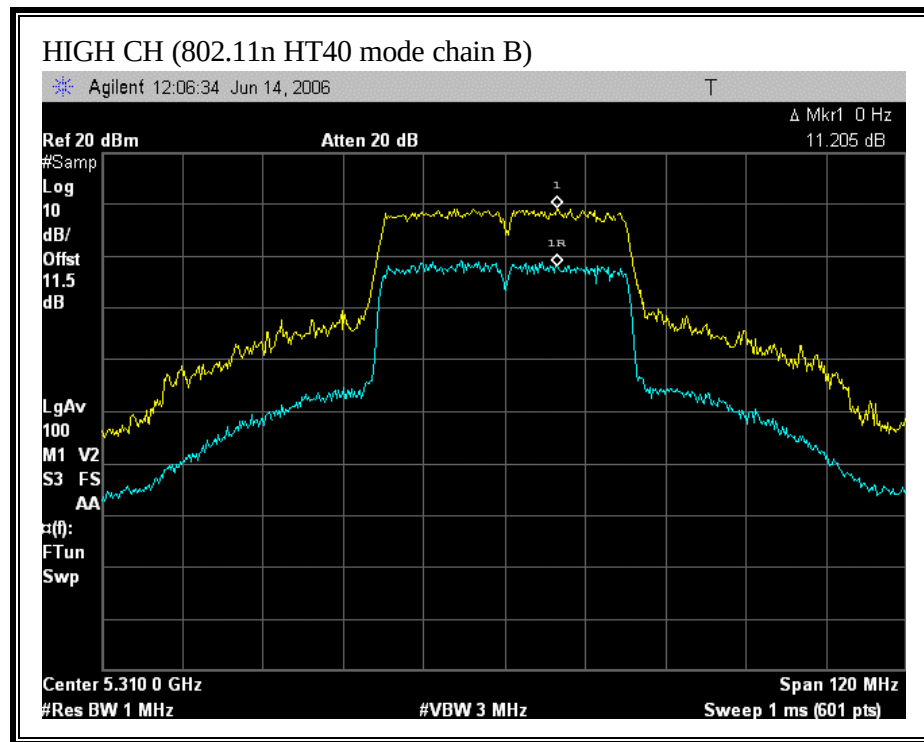

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.407 (b) (1 & 2) For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz.

TEST PROCEDURE

Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.


RESULTS

No non-compliance noted:


SPURIOUS EMISSIONS (802.11a 20M MODE CHAIN A)

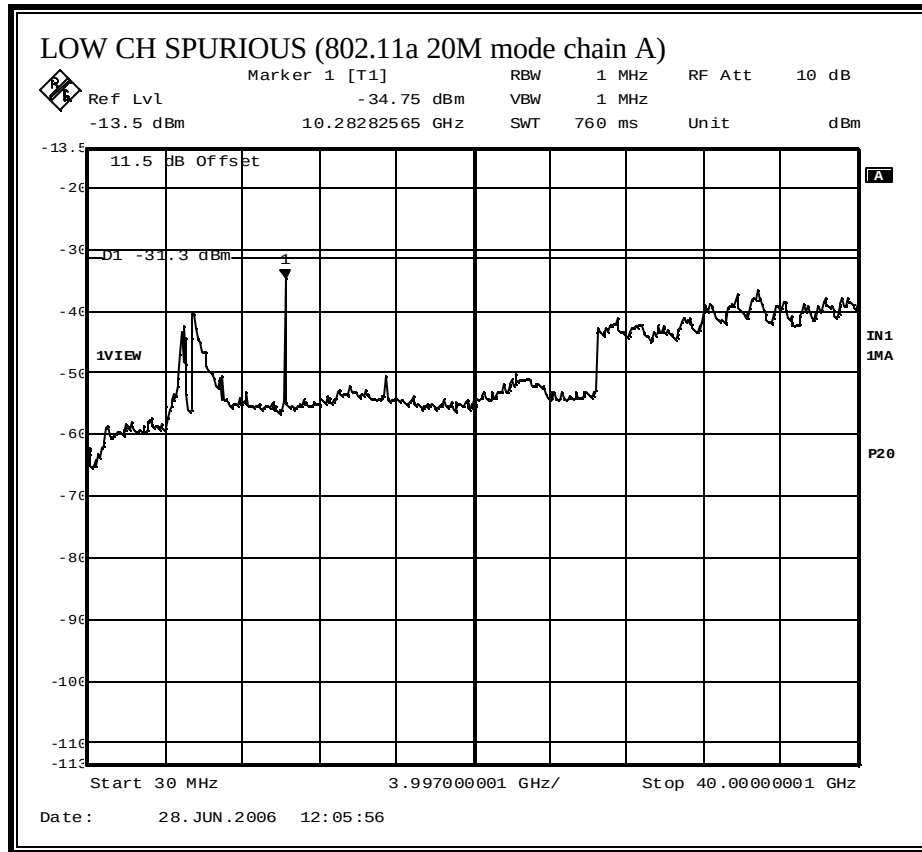


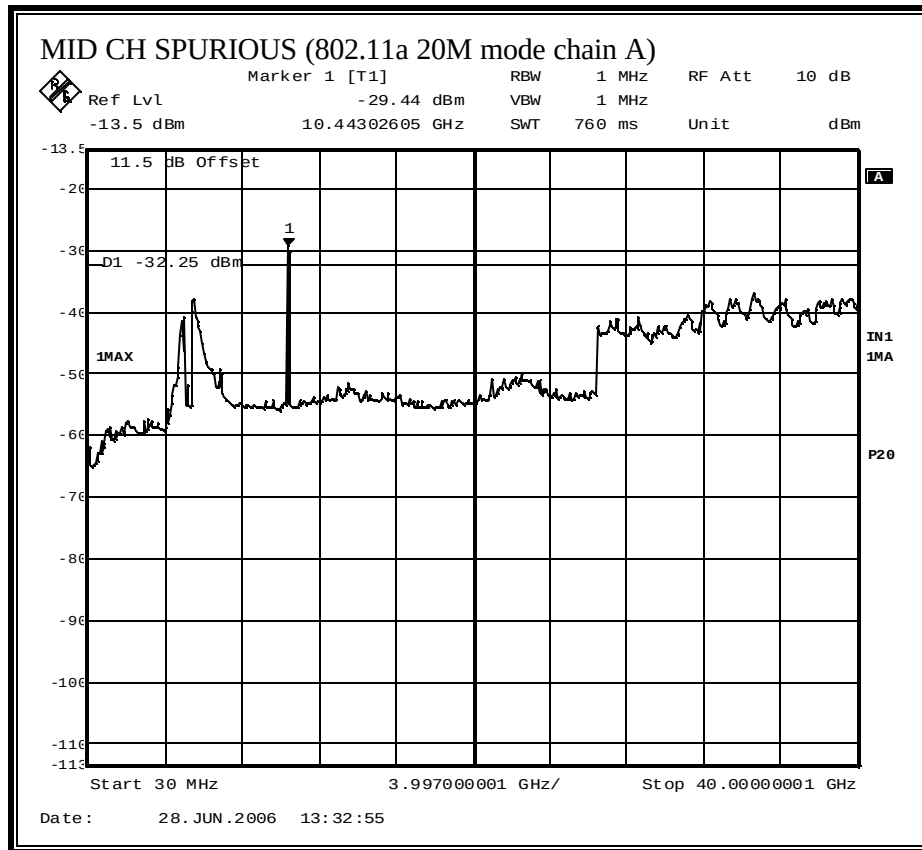


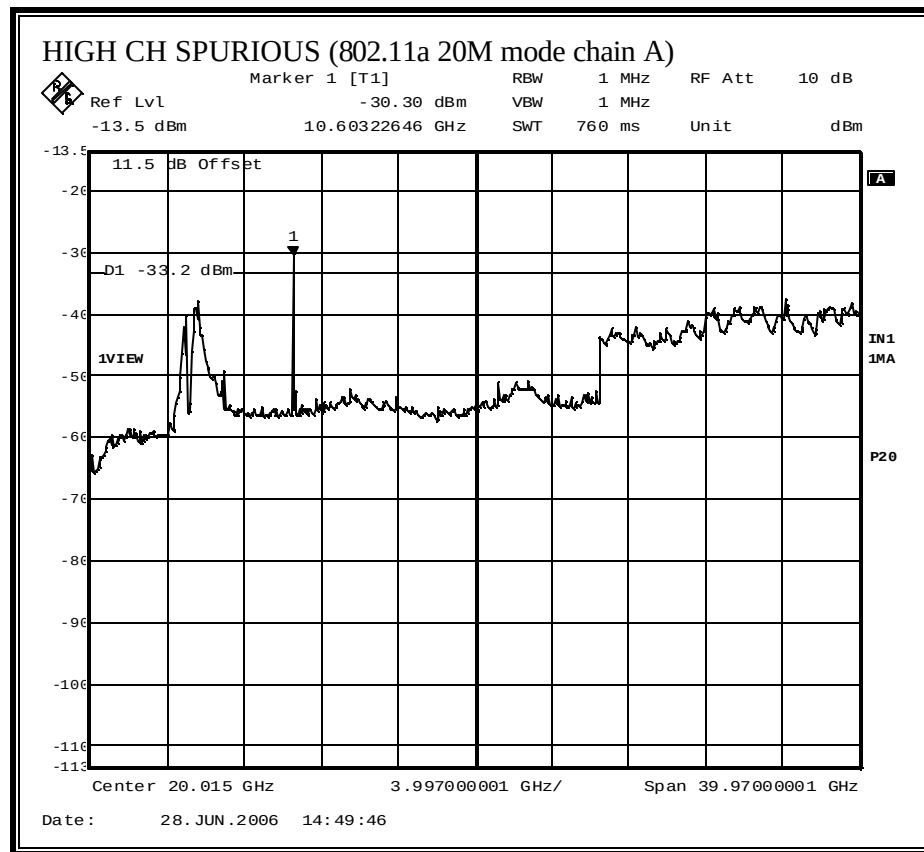


SPURIOUS EMISSIONS (802.11a 20M MODE CHAIN B)

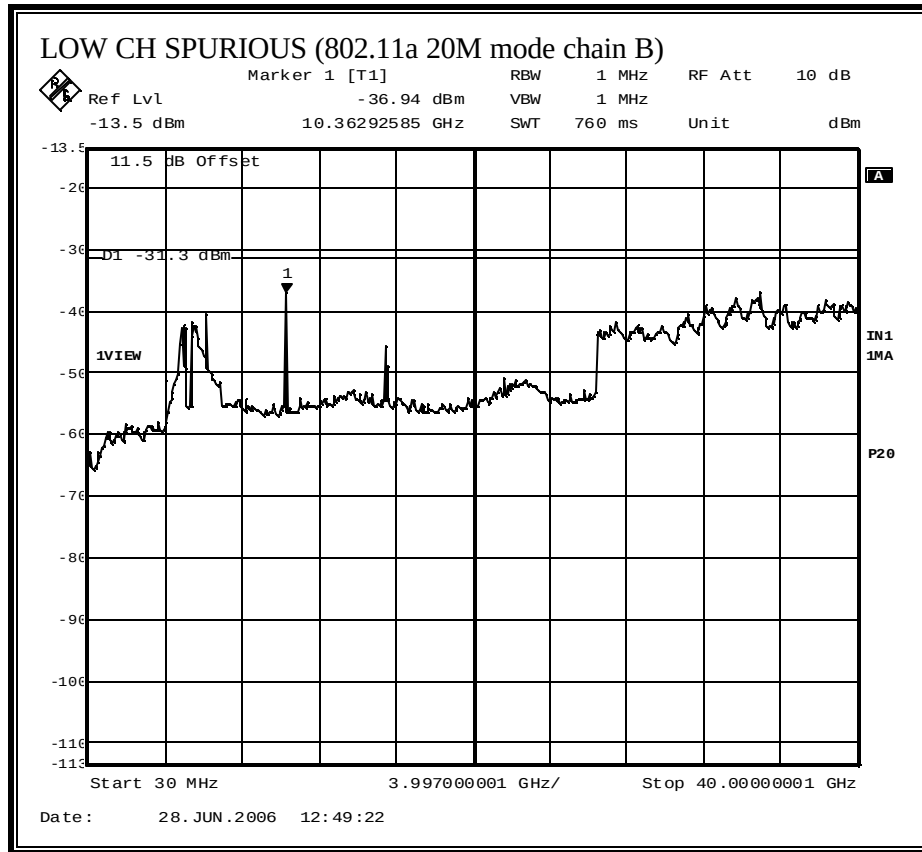


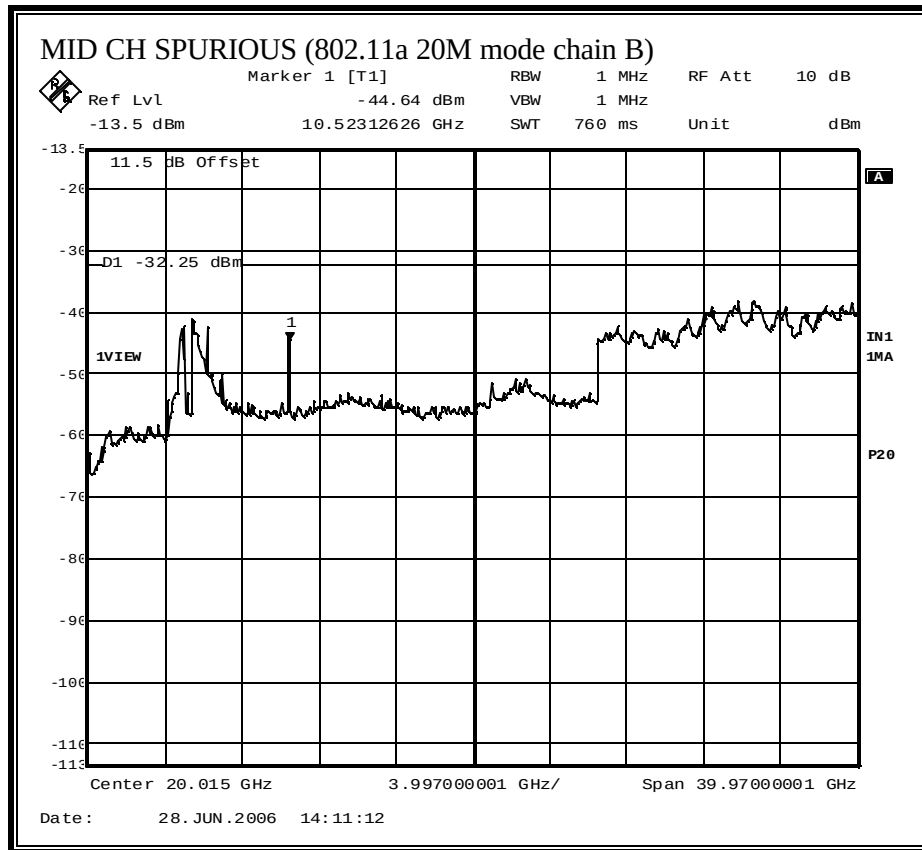


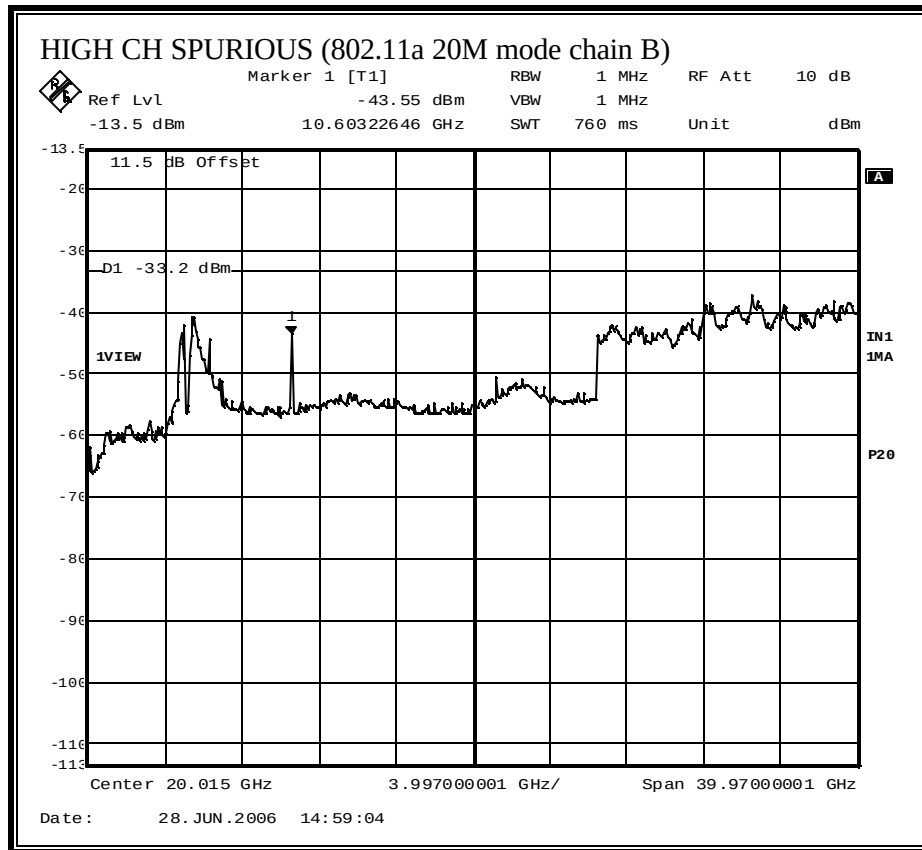


SPURIOUS EMISSIONS (802.11a 40MHz MODE CHAIN A)

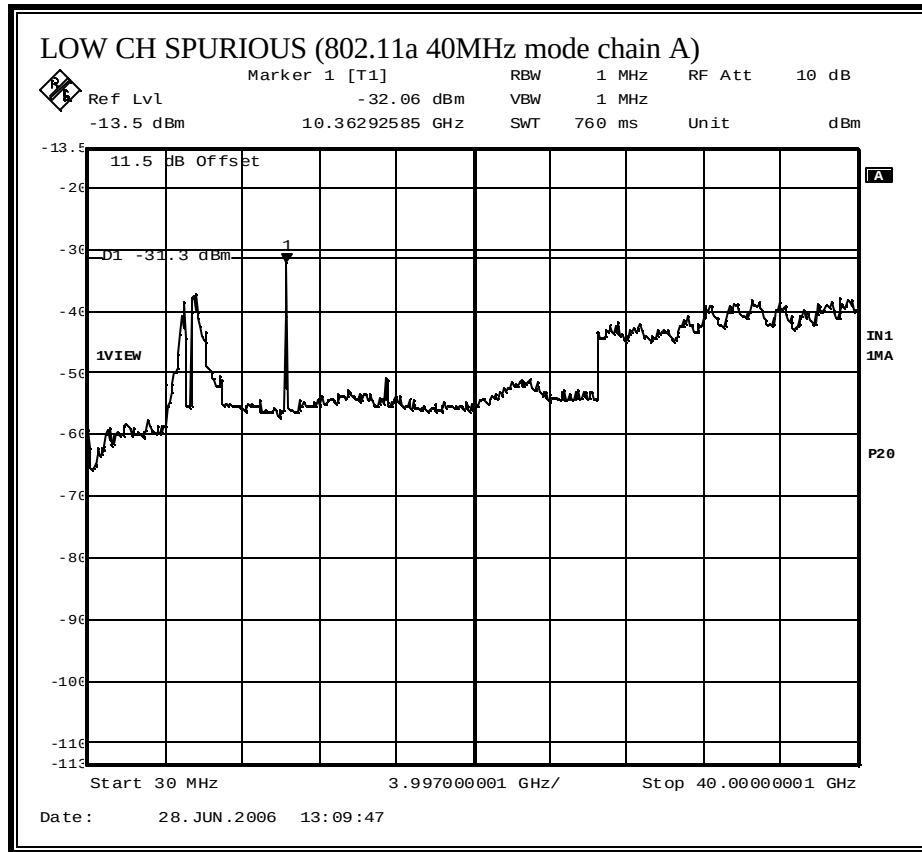


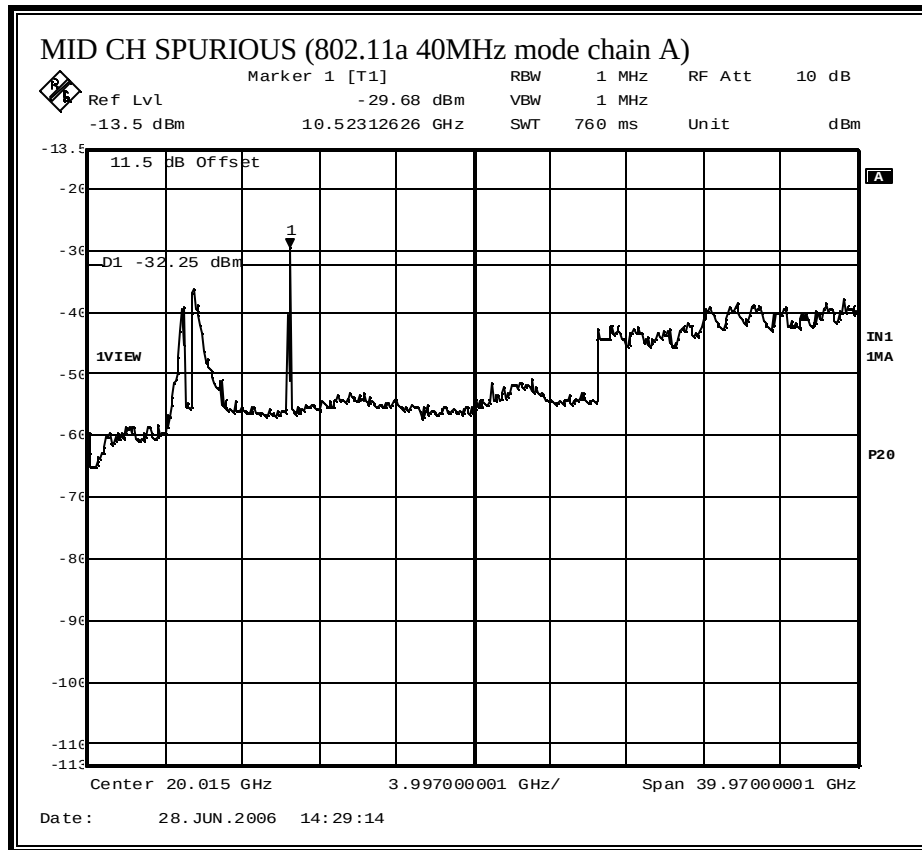


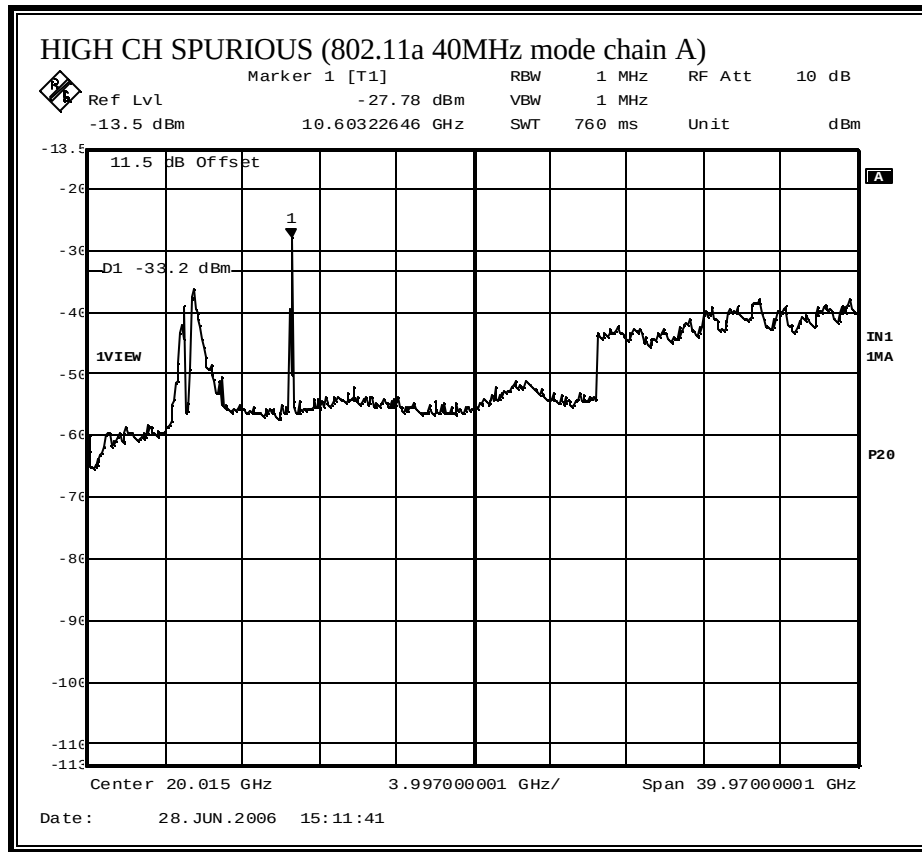


SPURIOUS EMISSIONS (802.11a 40MHz MODE CHAIN B)

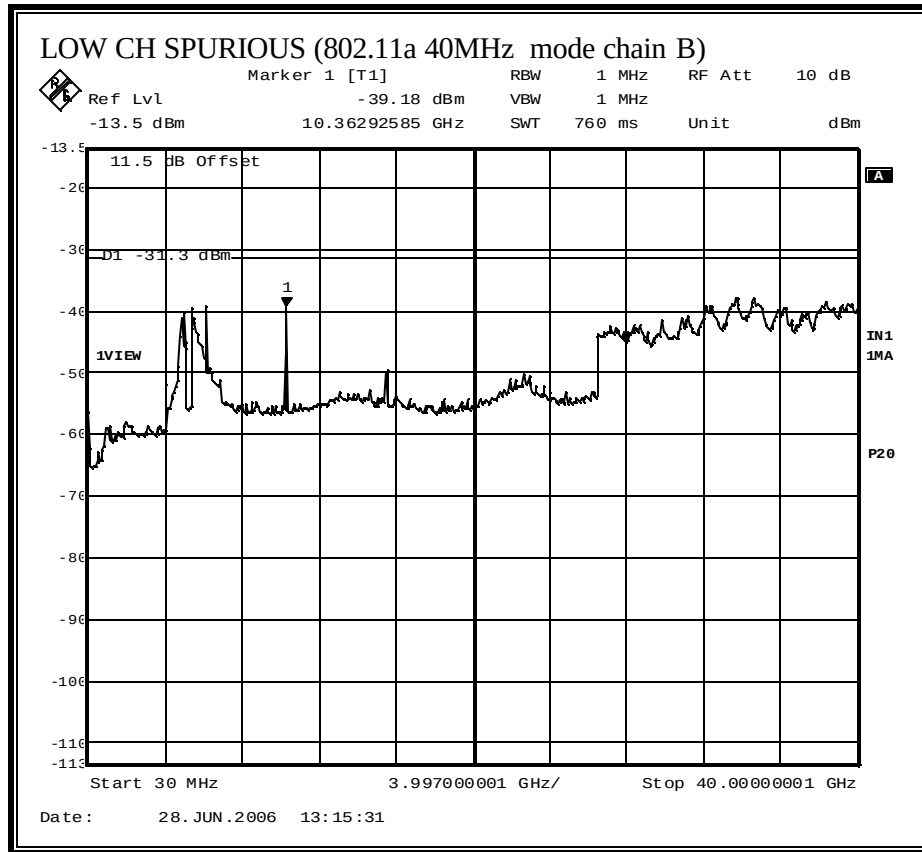


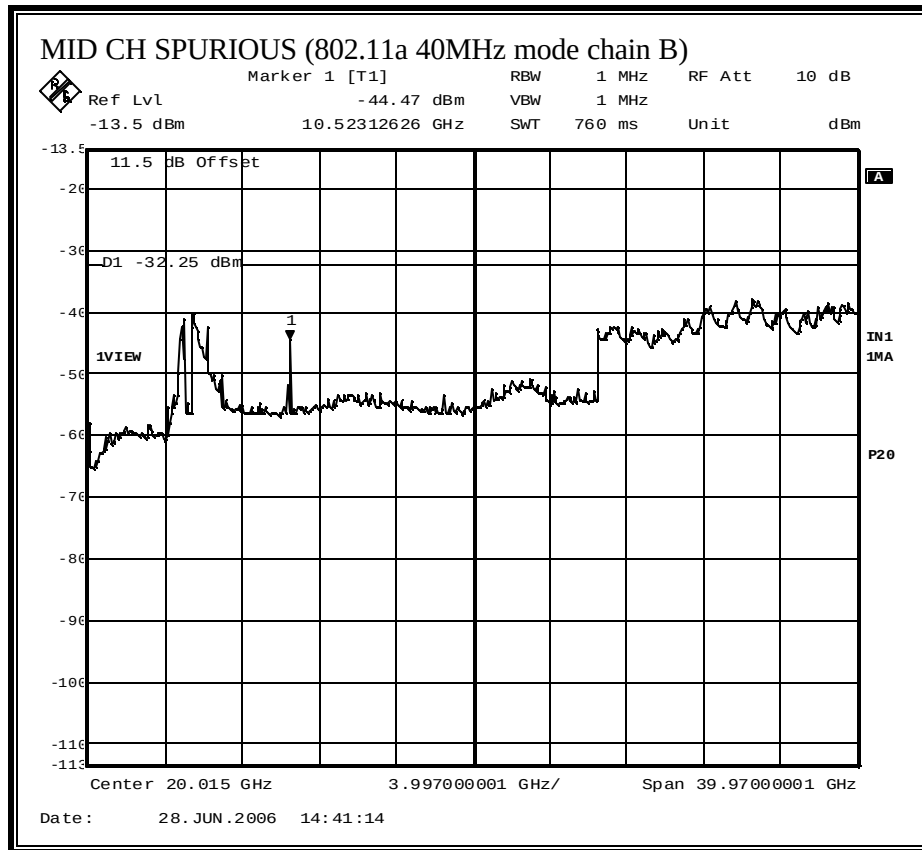


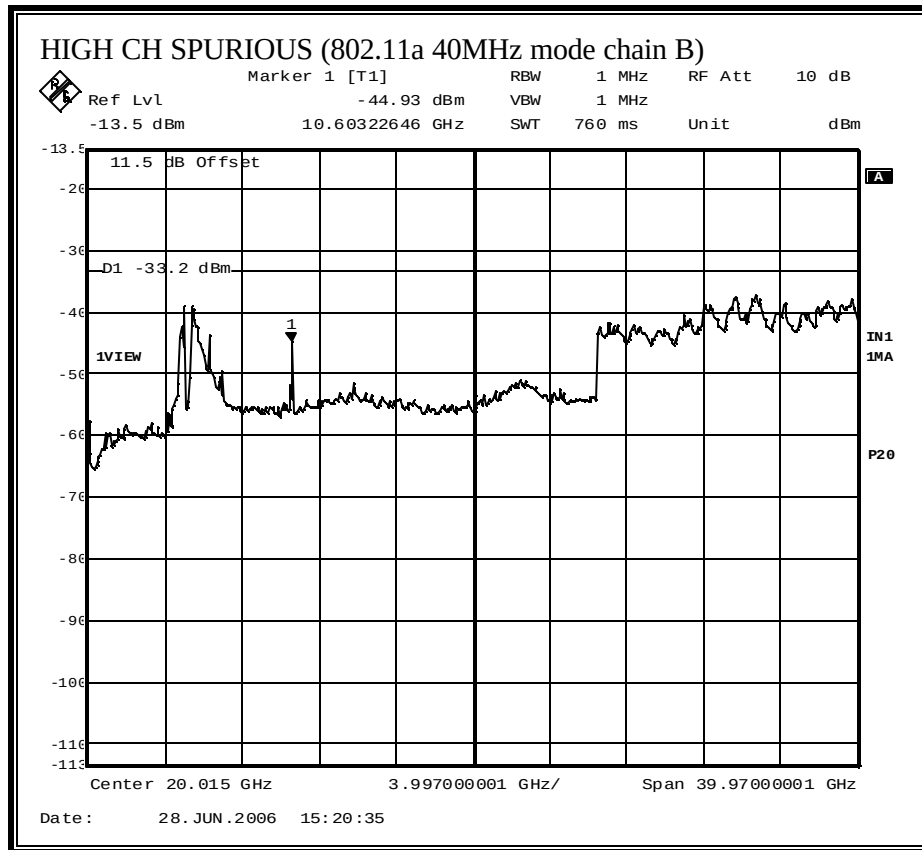


SPURIOUS EMISSIONS (802.11n HT20 MODE CHAIN A)

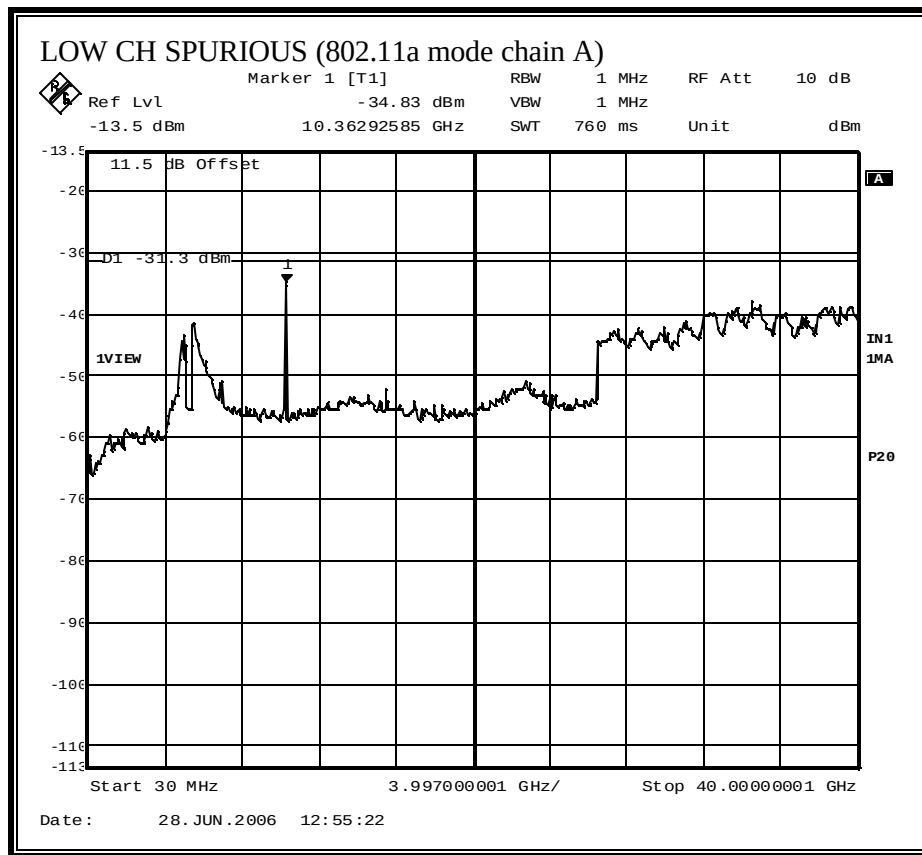


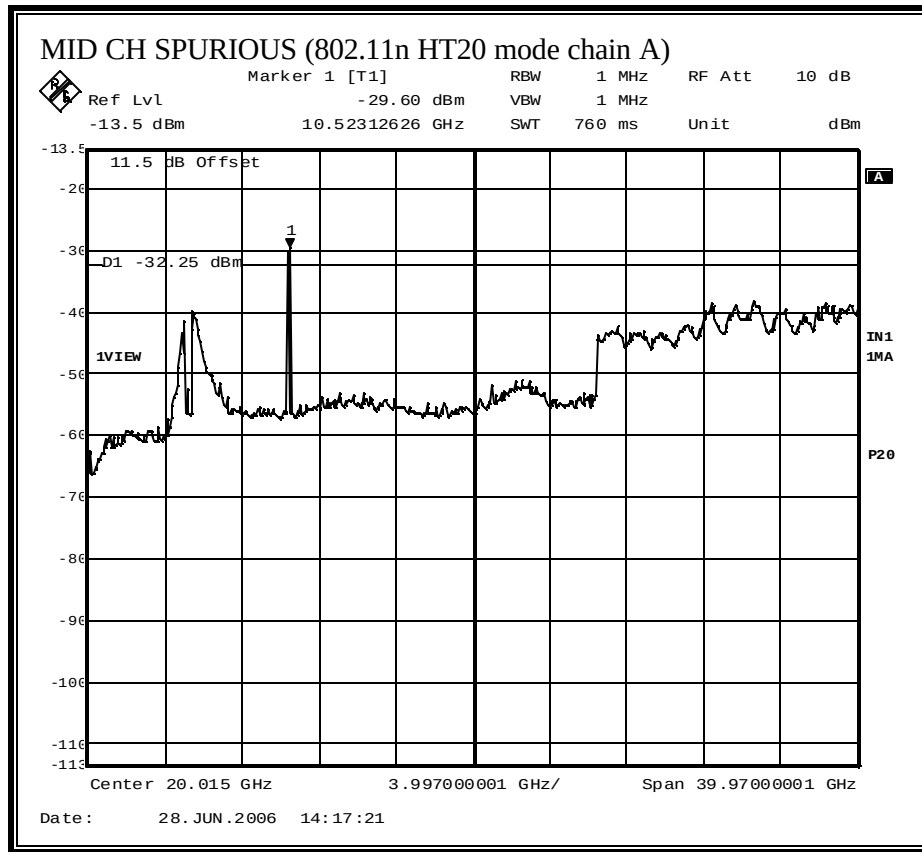


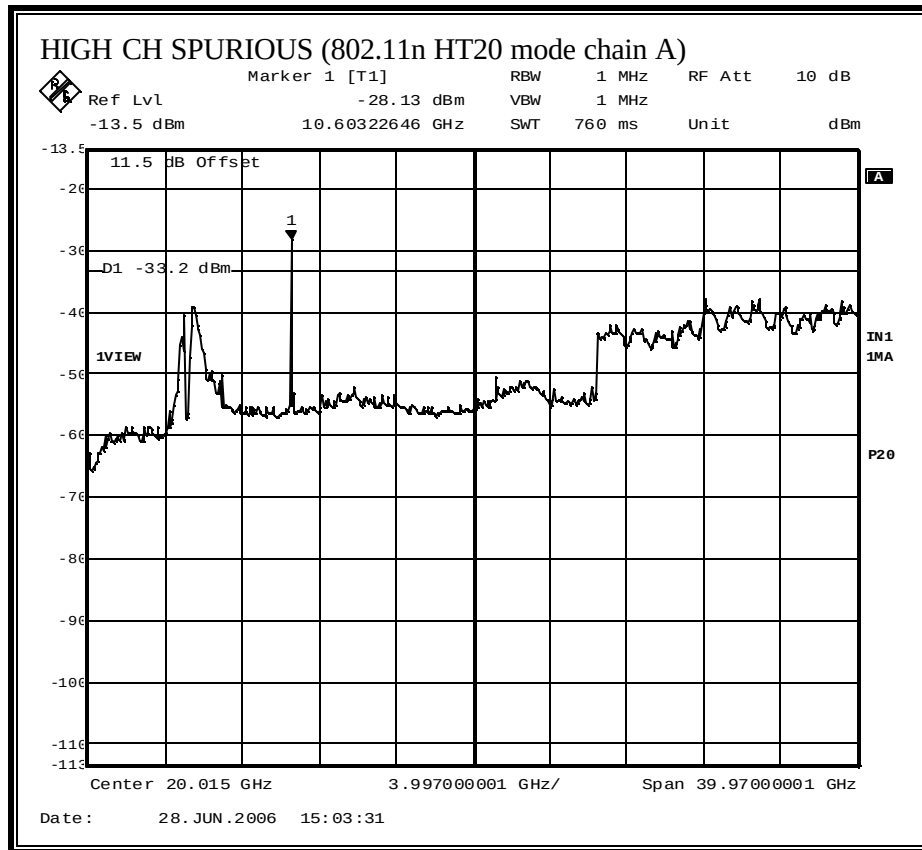


SPURIOUS EMISSIONS (802.11 HT20 MODE CHAIN B)

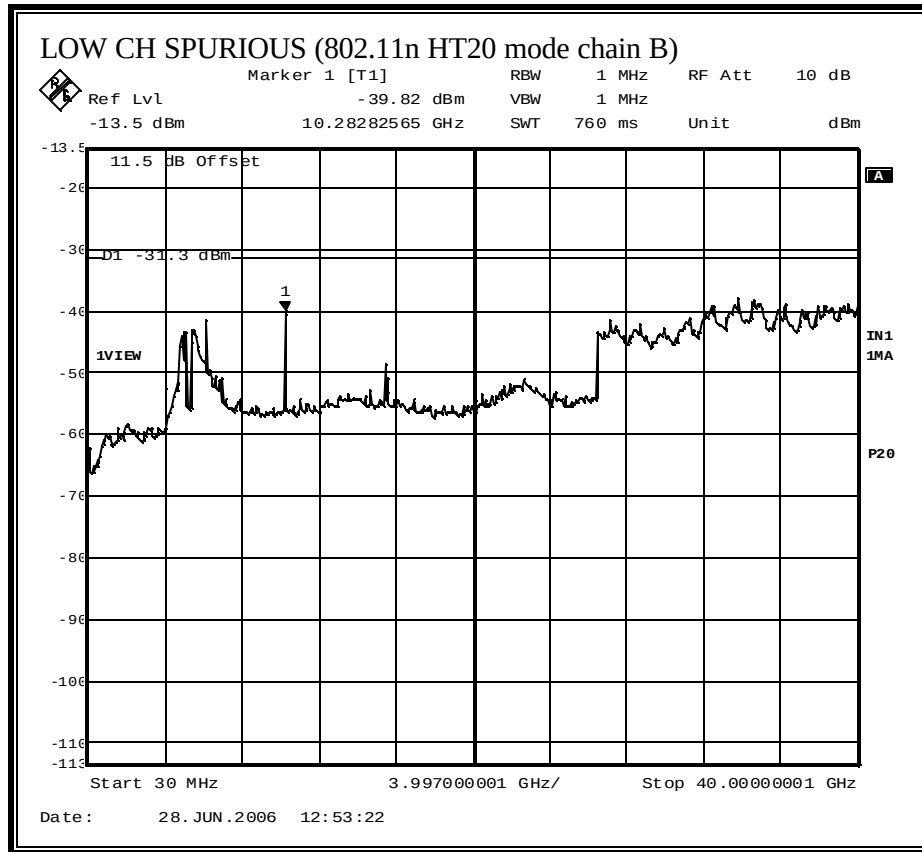


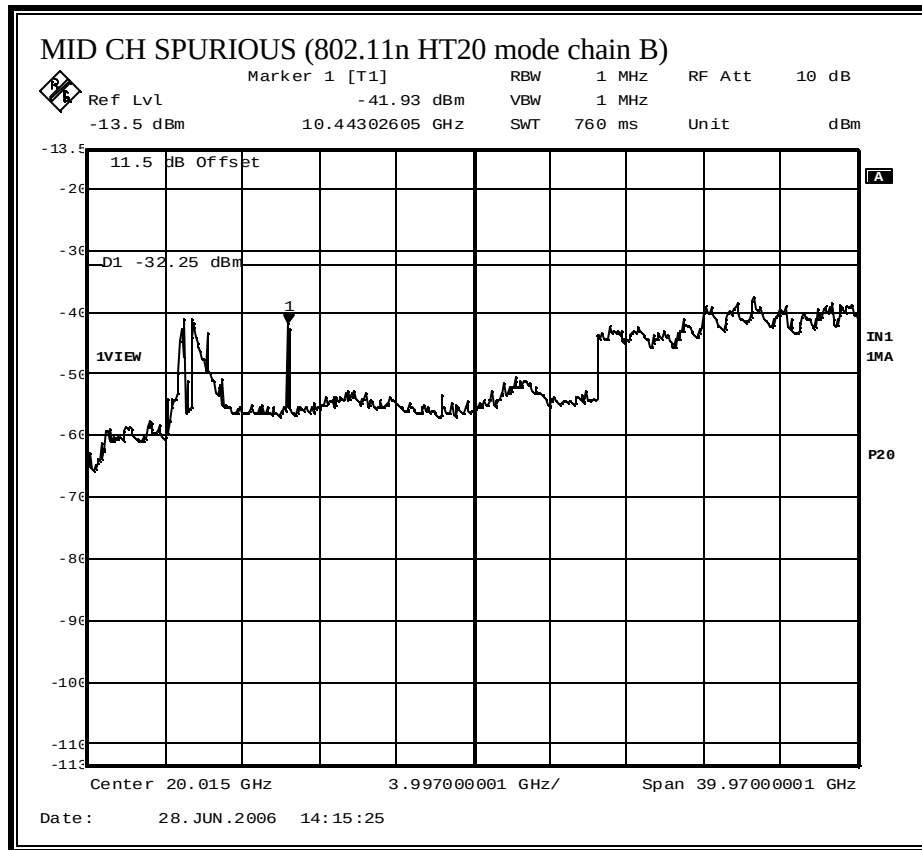


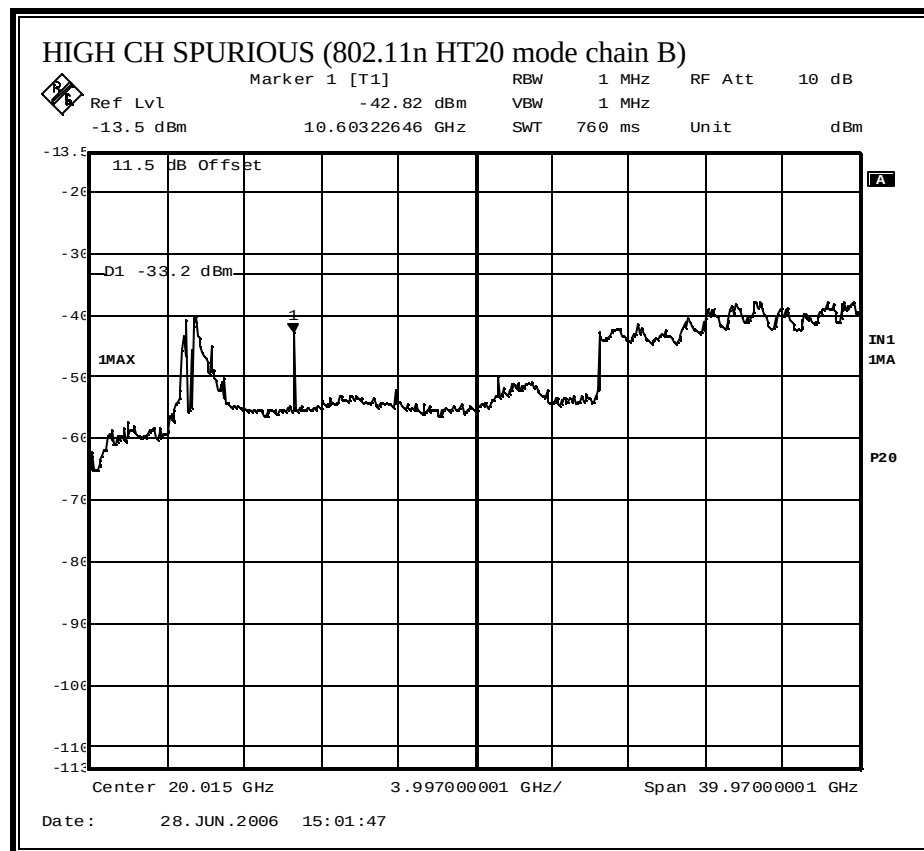


SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN A)

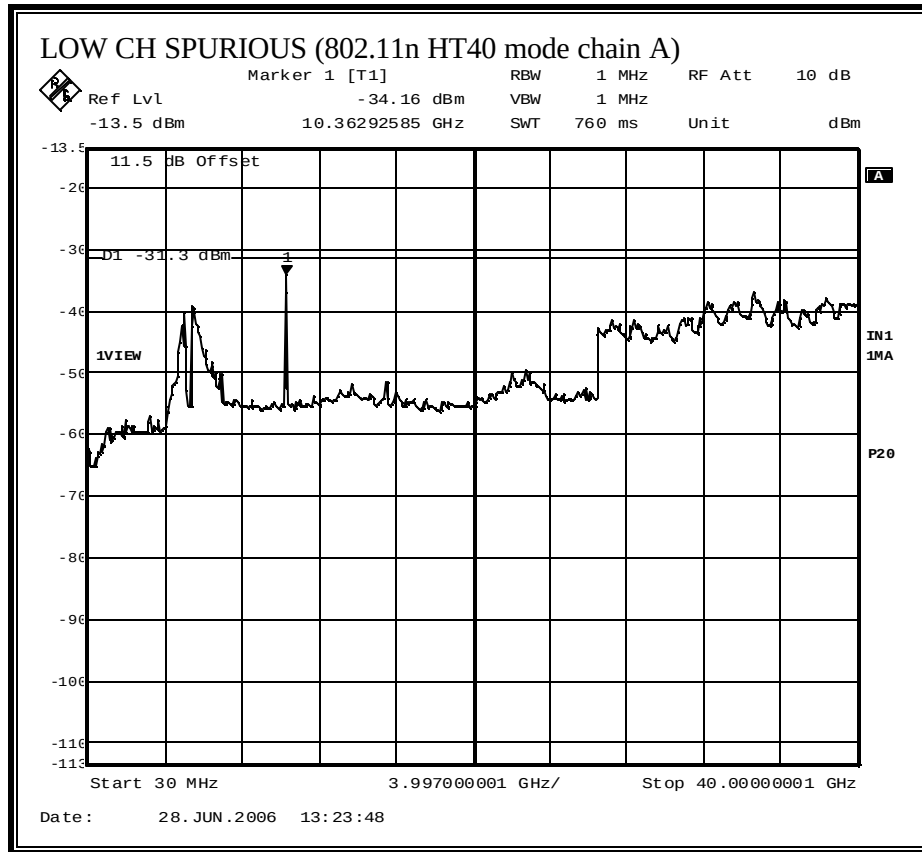


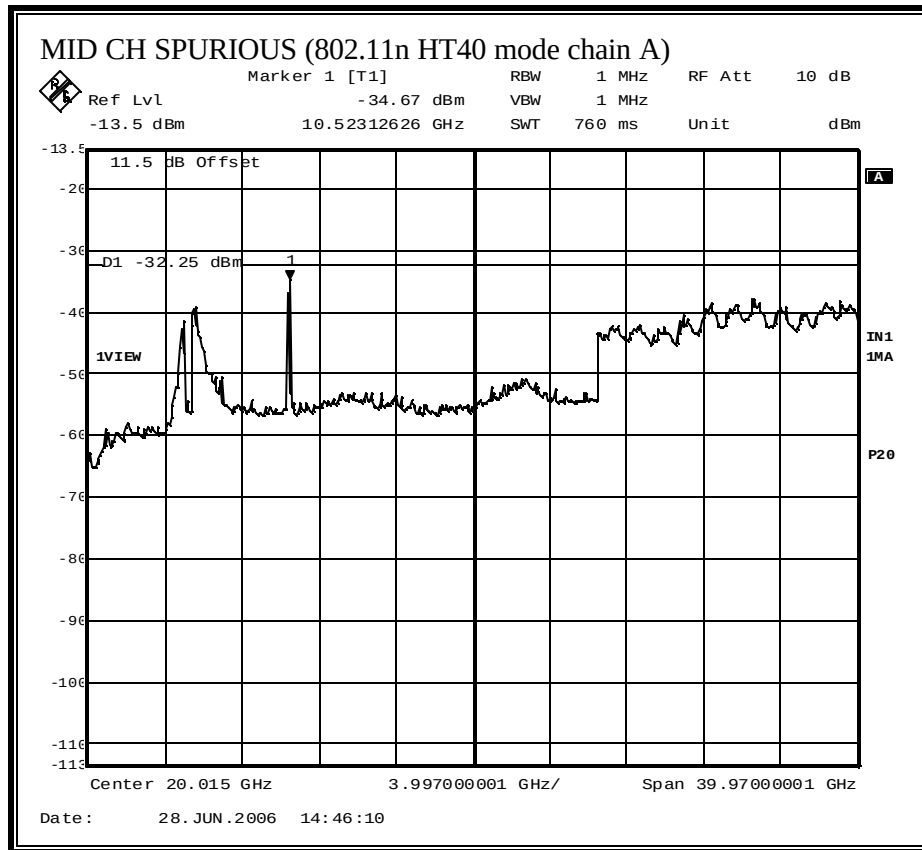


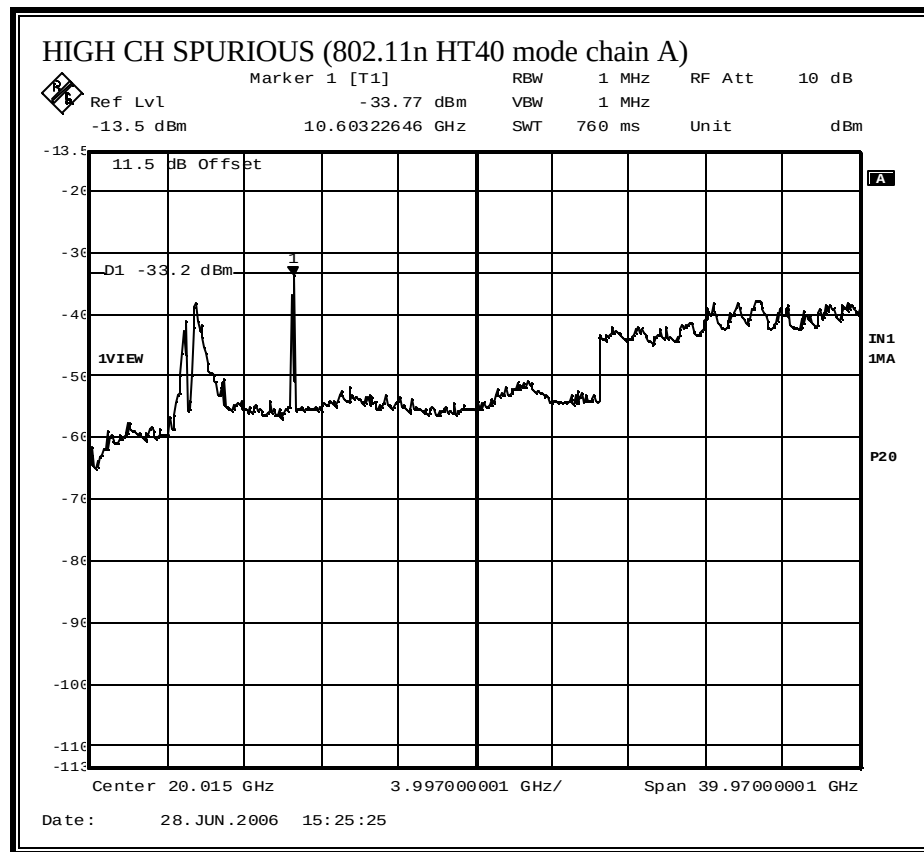

SPURIOUS EMISSIONS (802.11 HT40 MODE CHAIN B)

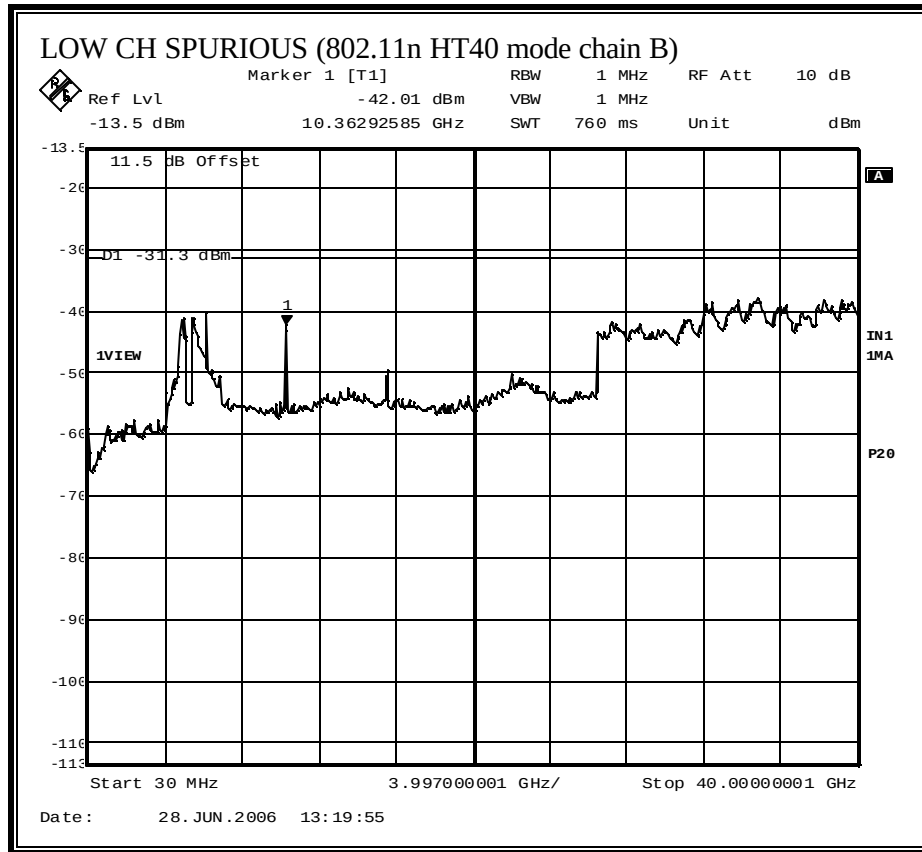


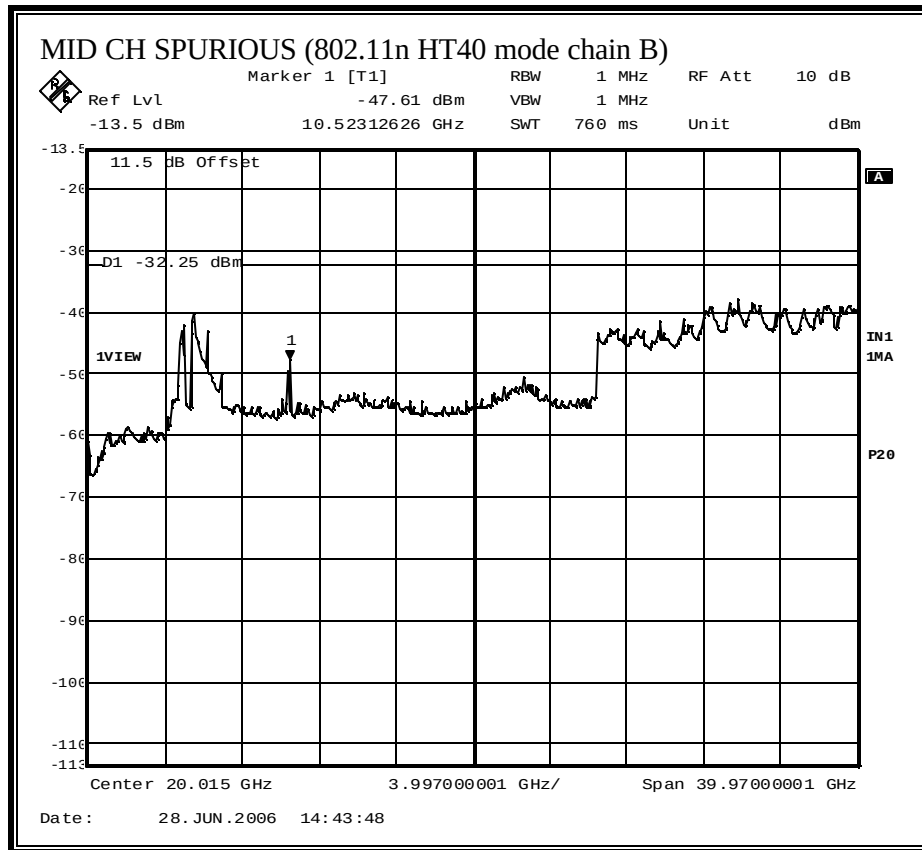


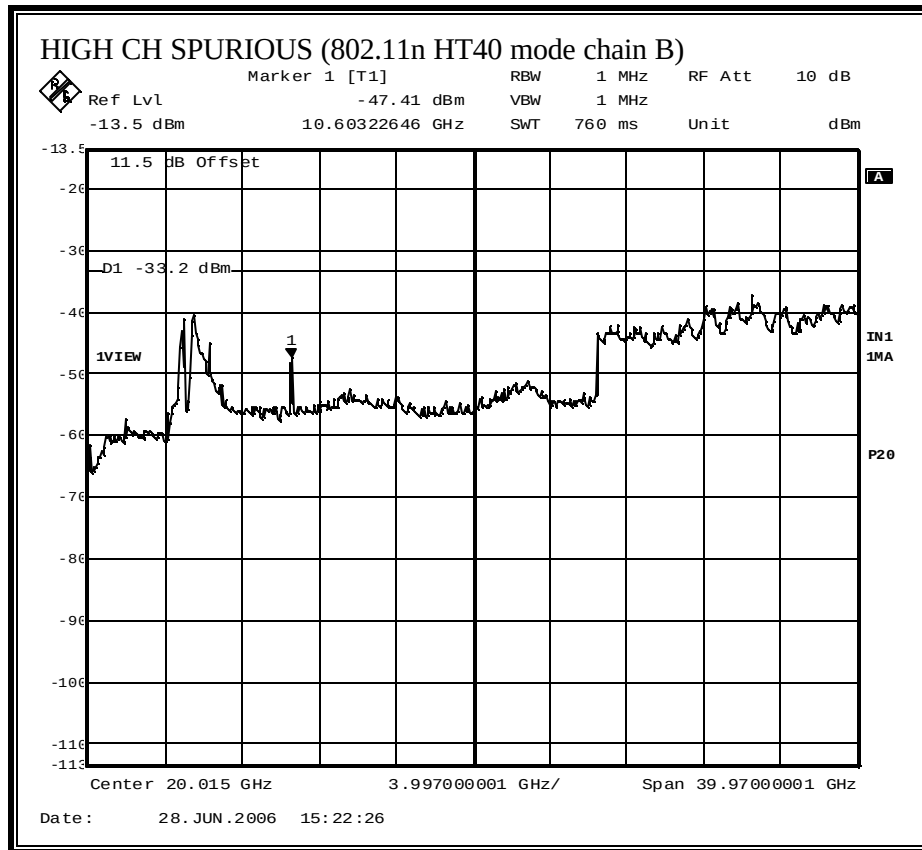


PLOTS USING COMBINER


(802.11a 20M MODE)

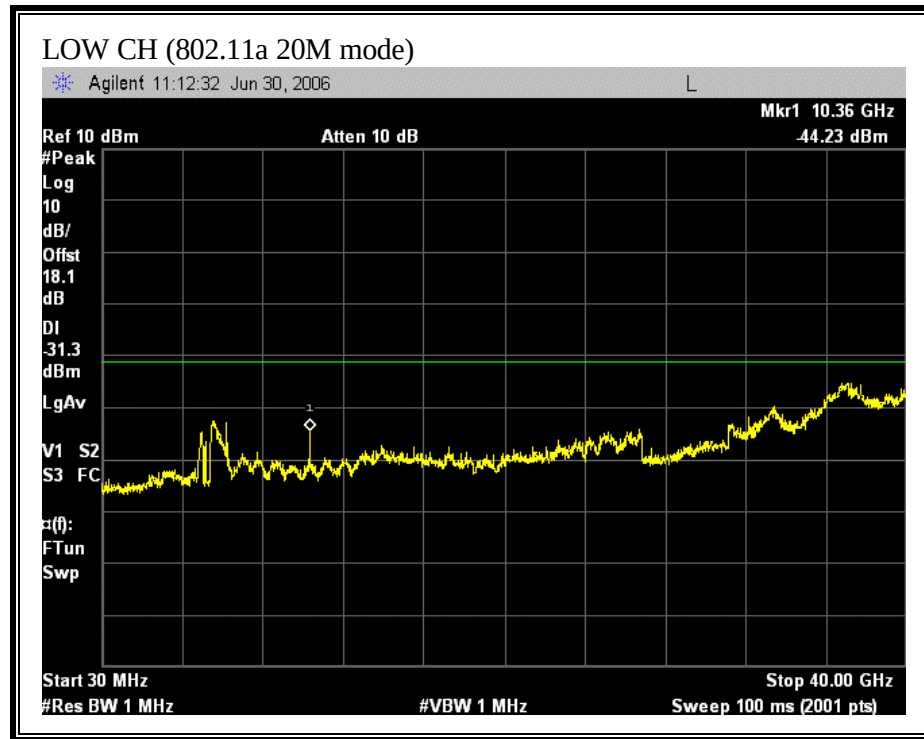


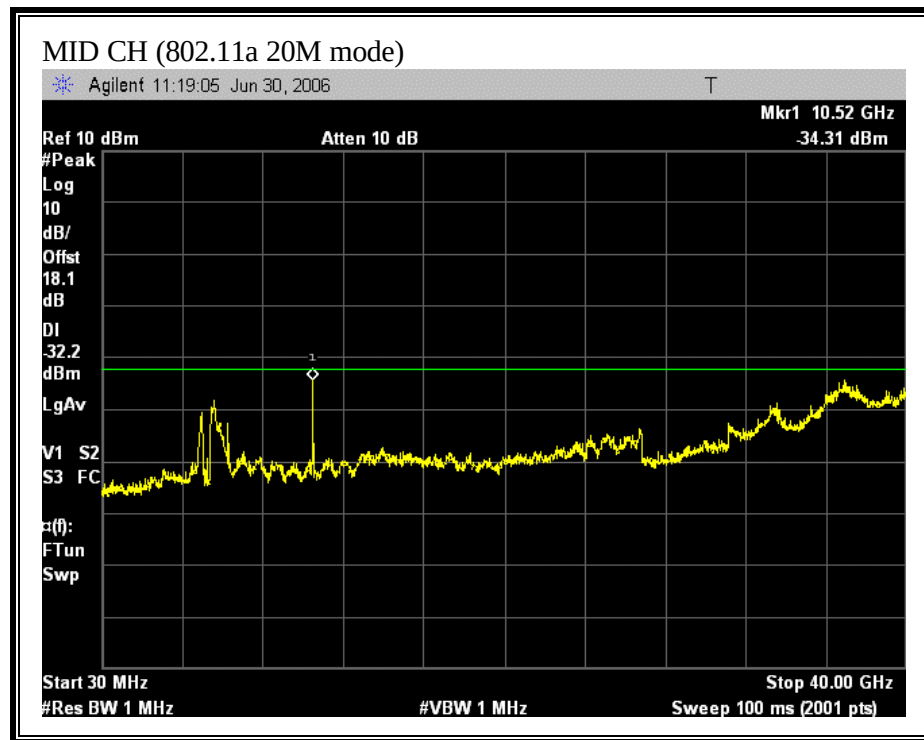


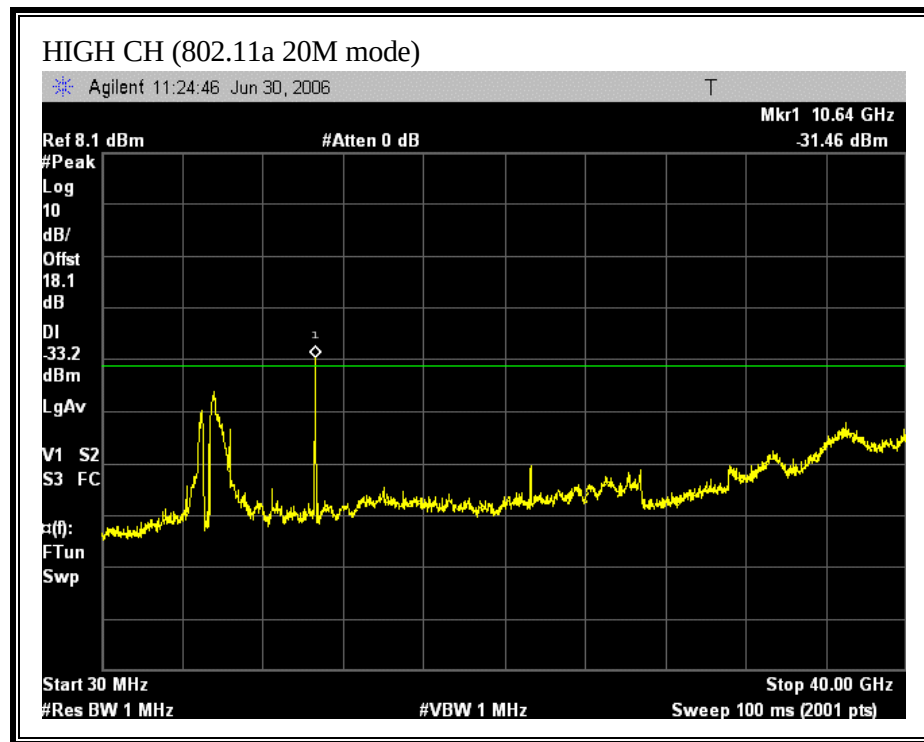


(802.11a 40M MODE)

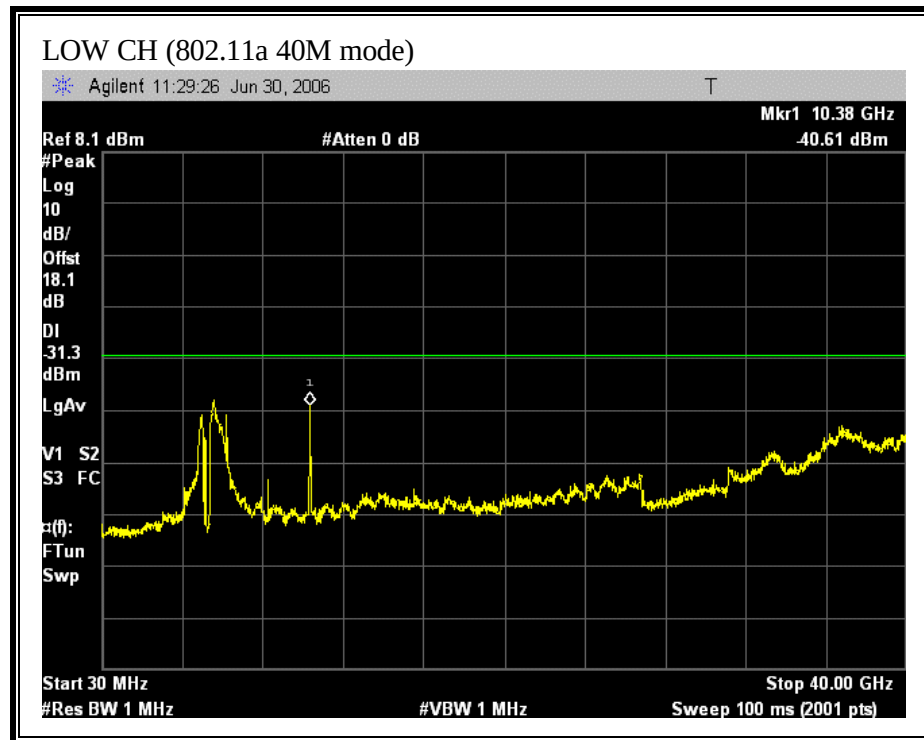


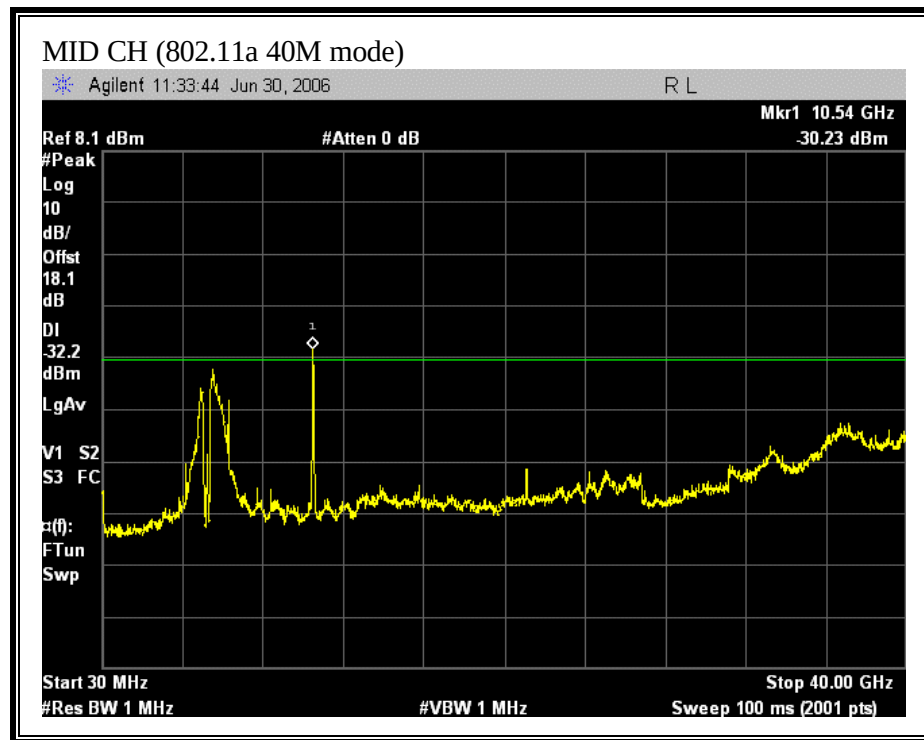


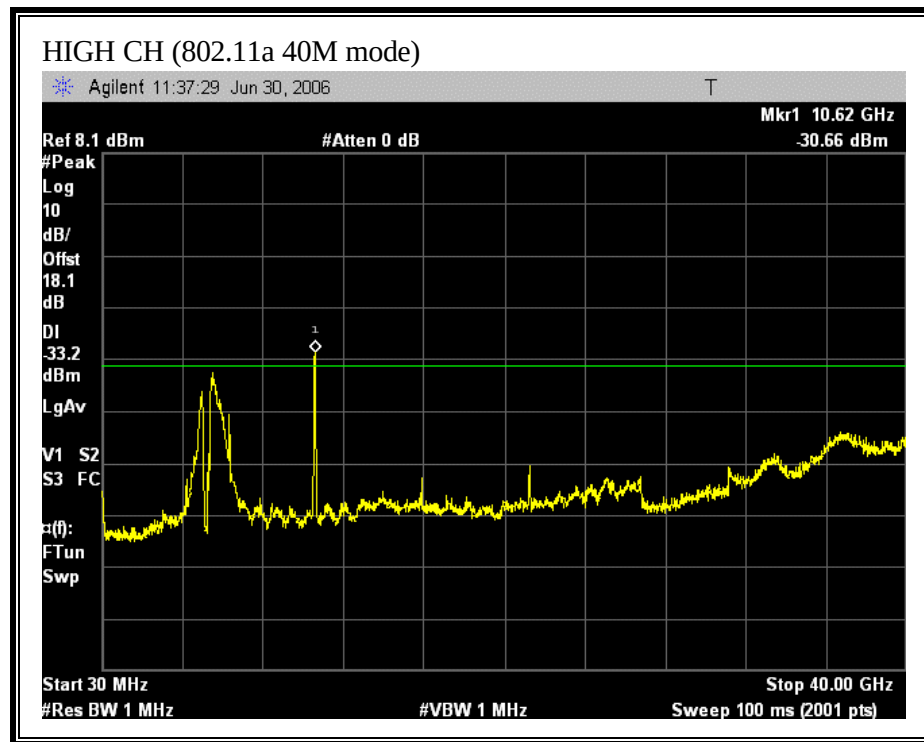


(802.11n HT20 MODE)

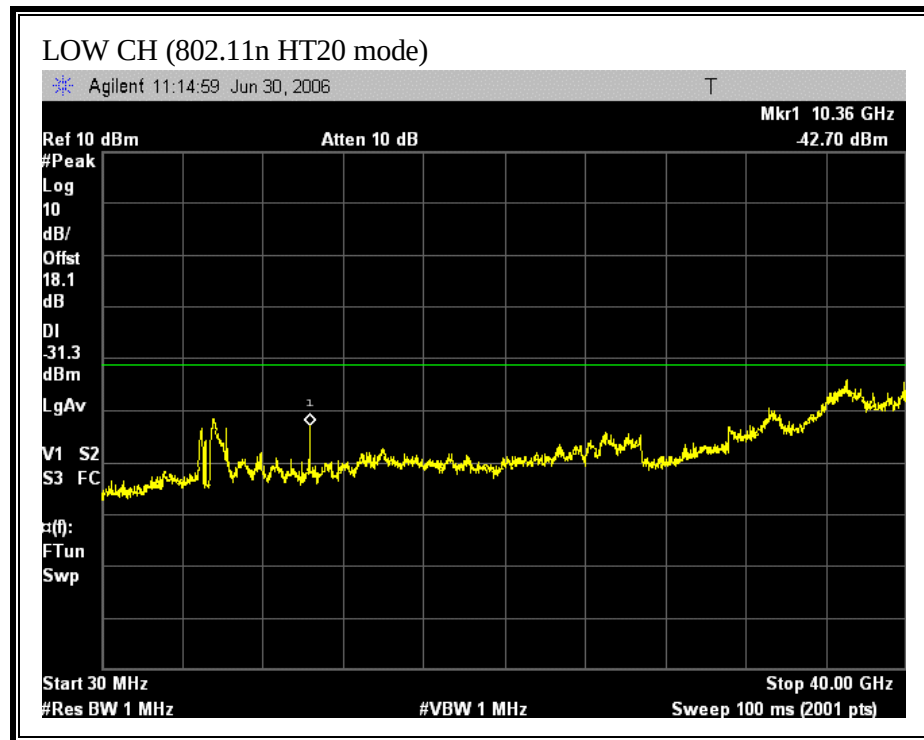


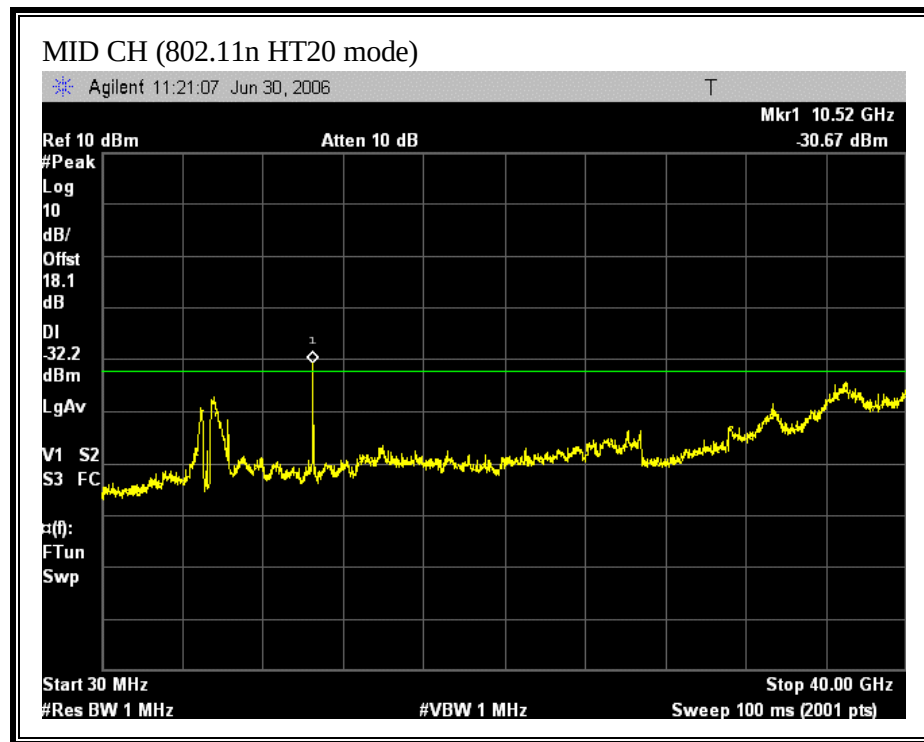


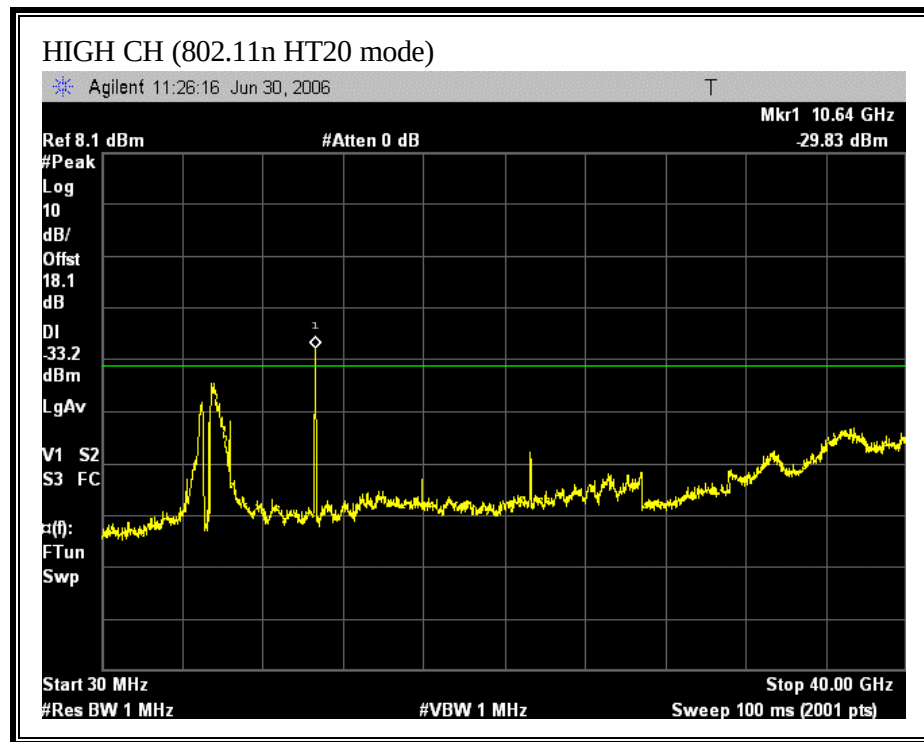

(802.11 HT40 MODE)

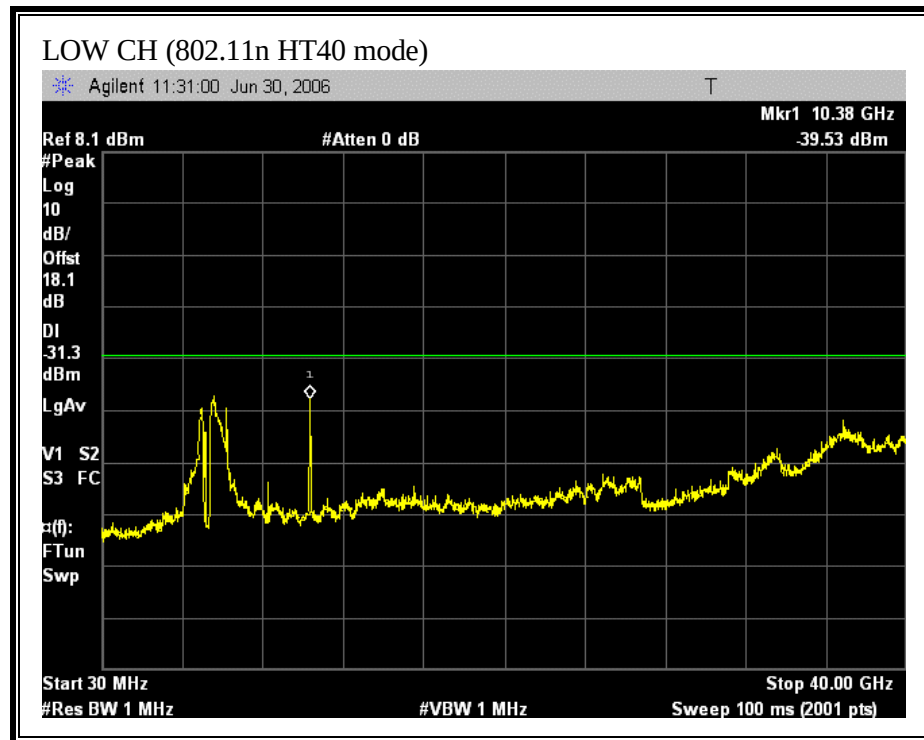

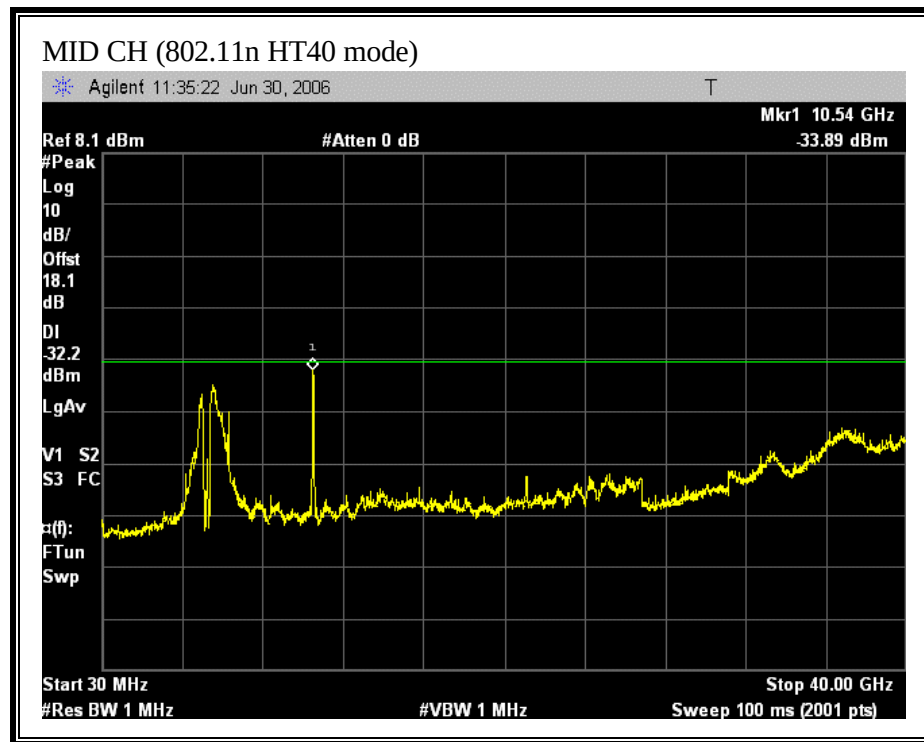

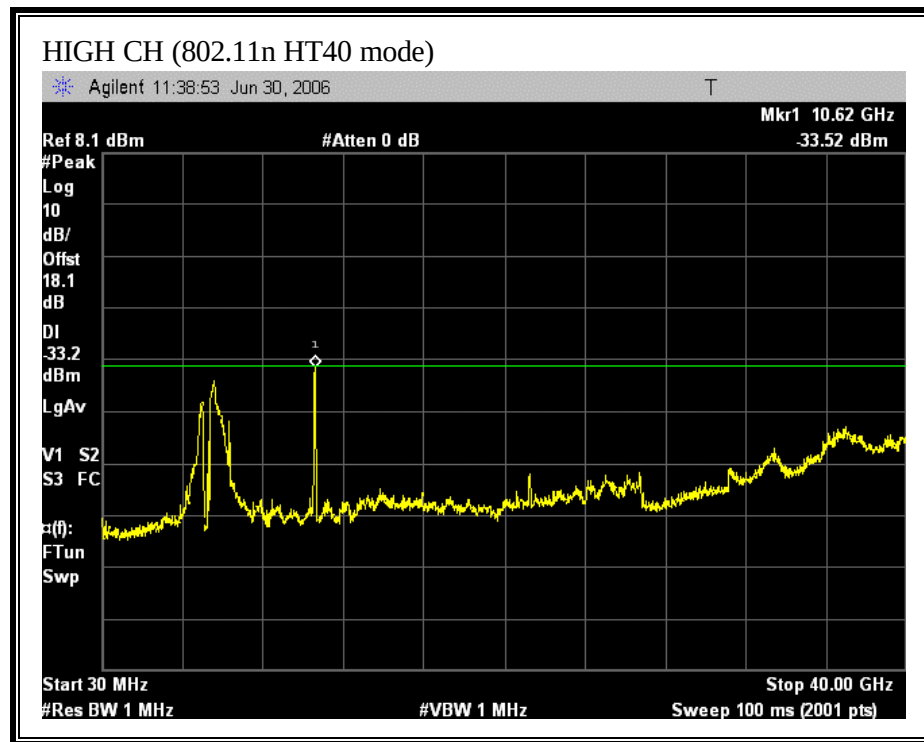

7.1.7. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Band (MHz)	Power Density Limit (mW/cm²)	Total Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
5150 to 5250	1.0	15.76	4.30	2.84
5250 to 5350	1.0	19.27	6.20	5.29

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 5150 TO 5350 MHz BAND– Foxconn


RESTRICTED BANDEGE (802.11a 20M MODE, LOW CHANNEL)

Foxconn Antenna

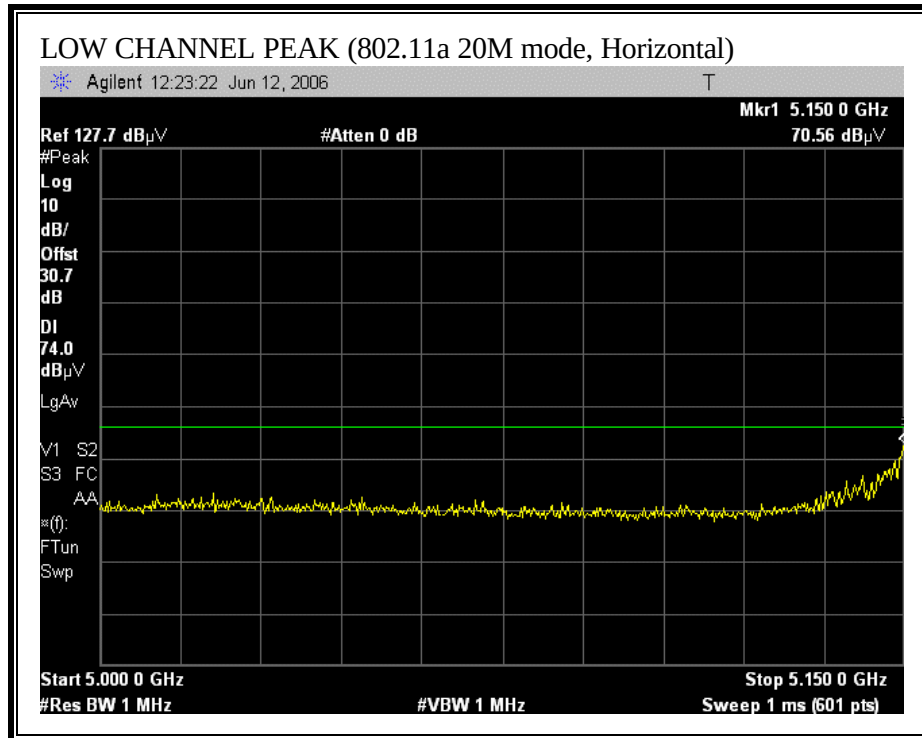


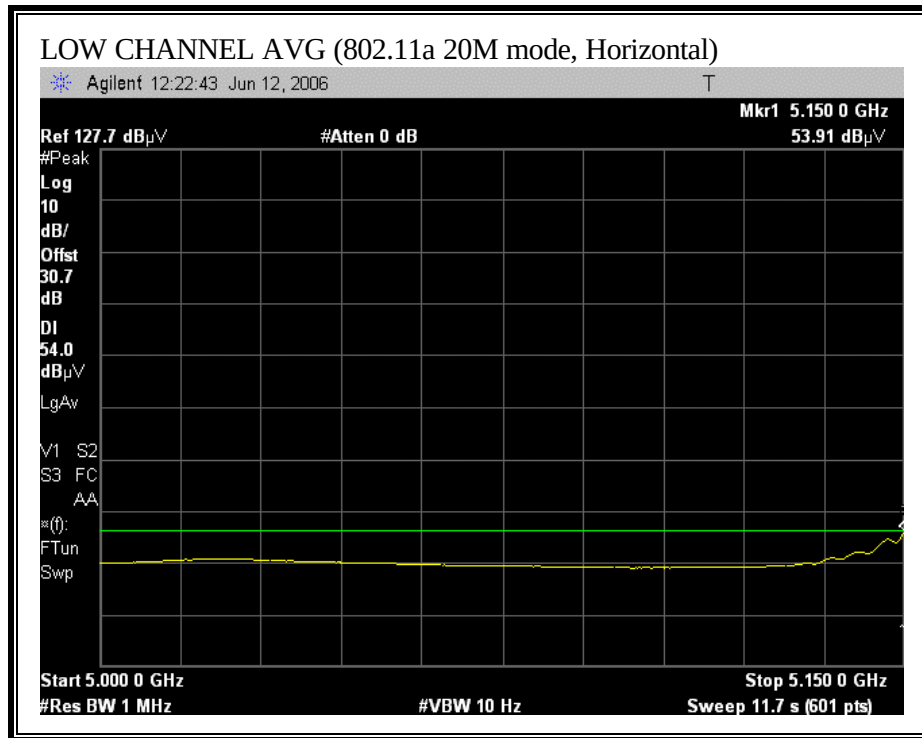


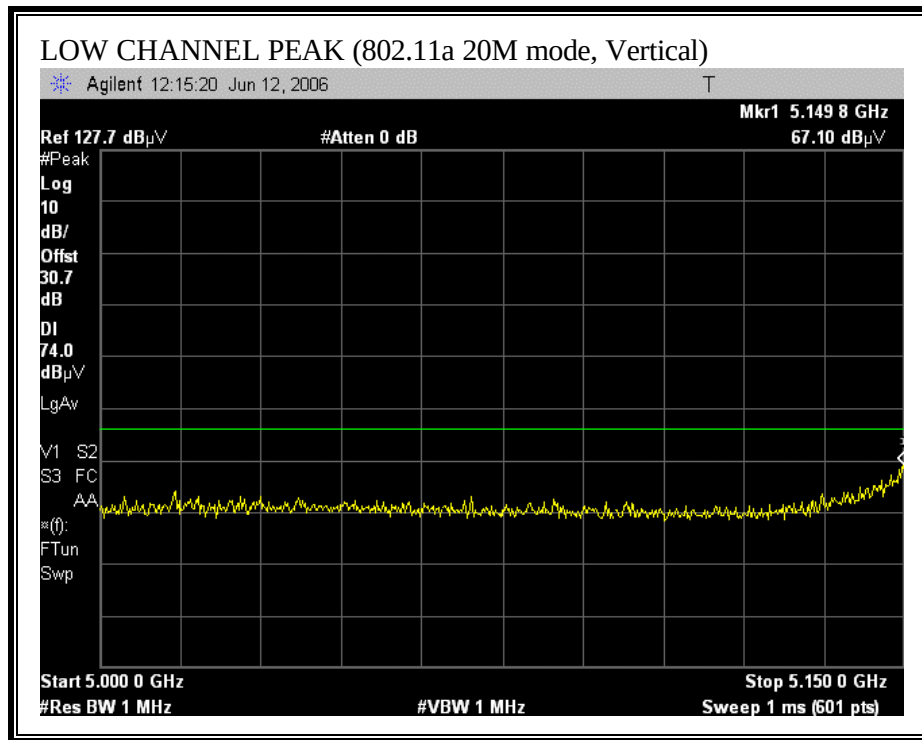


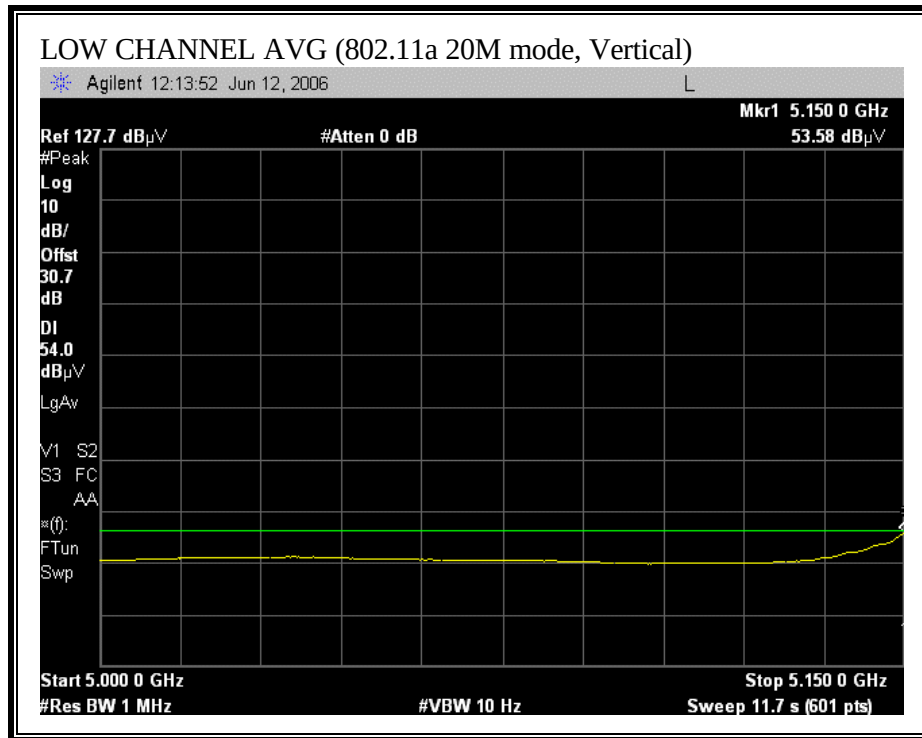


RESTRICTED BANDEDGE (802.11a 20M MODE, HIGH CHANNEL)

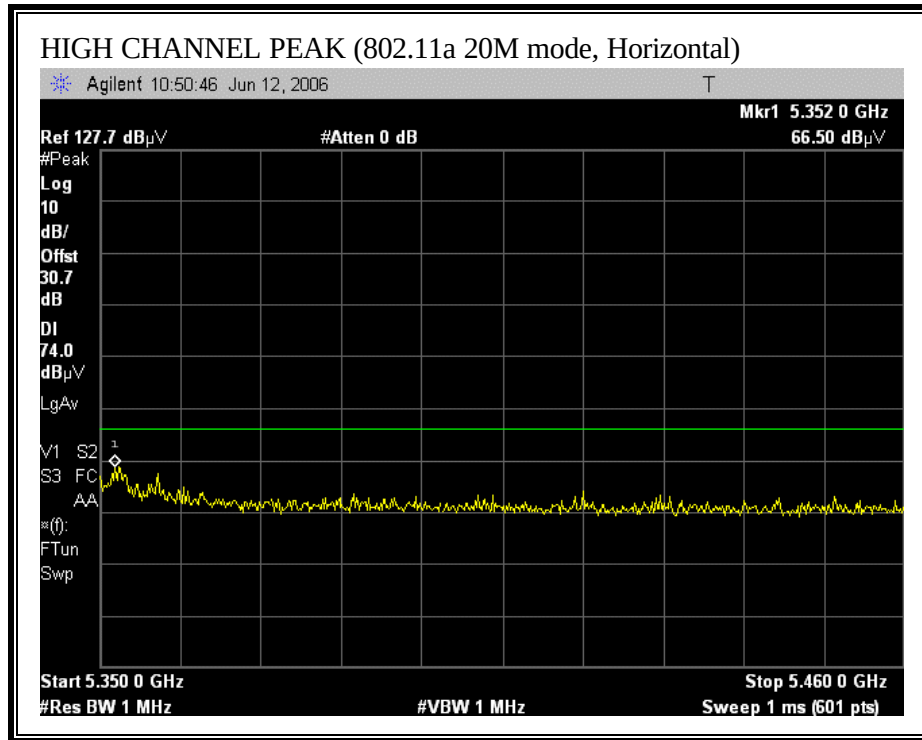

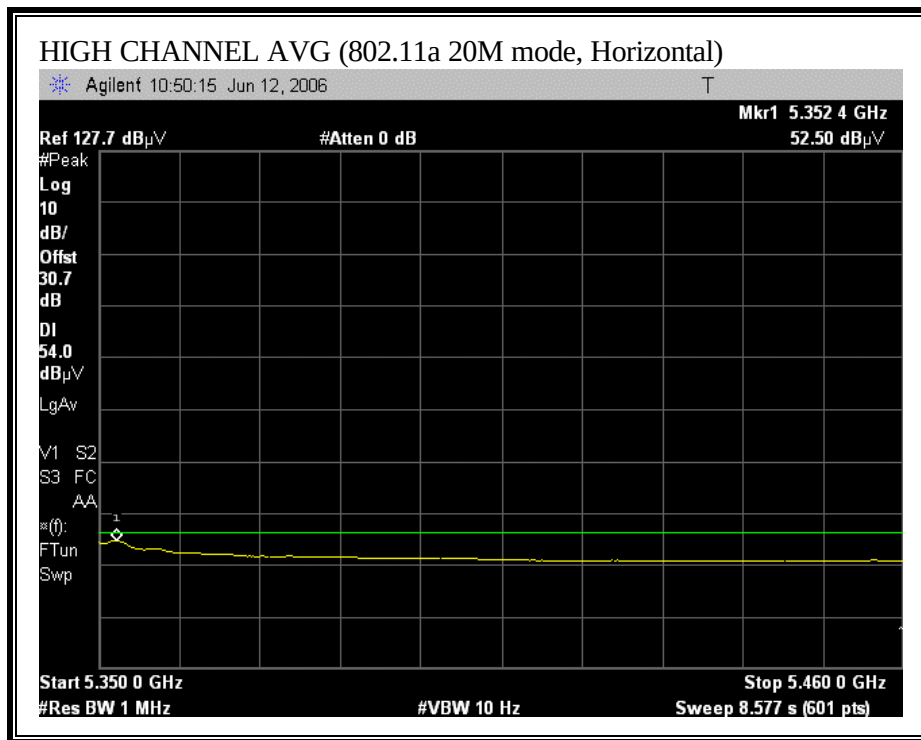

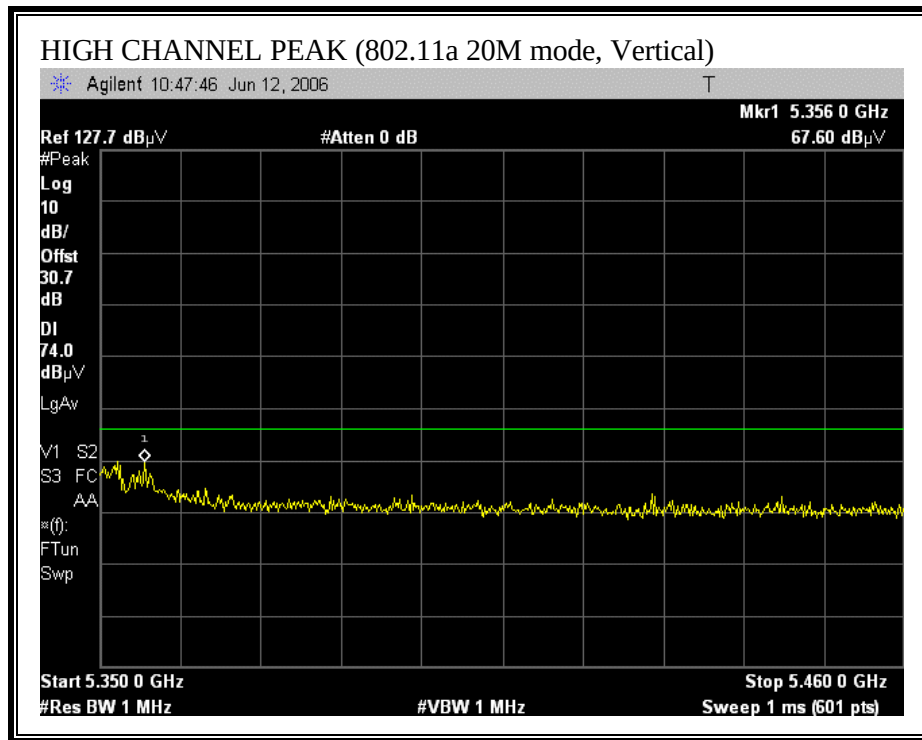

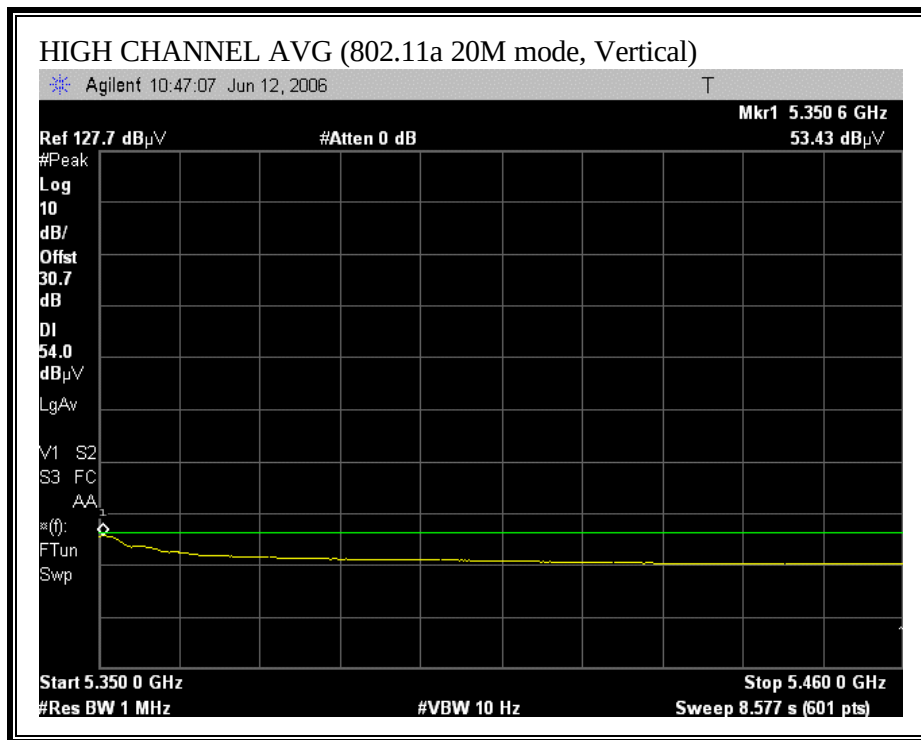


HARMONICS AND SPURIOUS EMISSIONS (802.11a 20M MODE)


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company:		Marvell														
Project #:		06U10359														
Date:		06/21/06														
Test Engineer:		Frank Ibrahim														
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)														
S/N:		099 (Modified EUT)														
Mode:		TX ON in 11a mode, 20 MHz BW														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T73; S/N: 6717 @3m				T145 Agilent 3008A005t								T89; ARA 18-26GHz; S/N:1049				
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
Frank 177080001				Frank 187209001				HPF_7.6GHz								
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Channel (5180 MHz)																
15.540	3.0	50.9	35.8	38.1	6.2	-32.3	0.0	0.7	63.6	48.5	74	54	-10.4	-5.5	V, Settings: 6C 68	
15.540	3.0	48.7	36.0	38.1	6.2	-32.3	0.0	0.7	61.5	48.7	74	54	-12.5	-5.3	H, Settings: 6C 68	
Middle Channel (5260 MHz)																
15.780	3.0	52.9	39.2	37.5	6.3	-32.2	0.0	0.7	65.2	51.5	74	54	-8.8	-2.5	V, Settings: 6E 69	
15.780	3.0	48.8	35.8	37.5	6.3	-32.2	0.0	0.7	61.1	48.1	74	54	-12.9	-5.9	H, Settings: 6E 69	
High Channel (5320 MHz)																
10.640	3.0	57.3	43.3	37.1	5.1	-34.2	0.0	0.8	66.0	52.0	74	54	-8.0	-2.0	V, Settings: 60 5E	
10.640	3.0	55.4	43.3	37.1	5.1	-34.2	0.0	0.8	64.2	52.0	74	54	-9.8	-2.0	H, Settings: 60 5E	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company:		Marvell														
Project #:		06U10359														
Date:		06/28/06														
Test Engineer:		Frank Ibrahim														
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)														
S/N:		099 (Modified EUT)														
Mode:		TX ON in 11a mode, 20 MHz BW														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T73; S/N: 6717 @3m				1145 Agilent 3008A0050												
RF Frequency Cables																
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
				Frank 177080001				Frank 187209001				HPF_7.6GHz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBm	Avg dBm	Pk Lim dBm	Avg Lim dBm	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Middle Channel (5260 MHz)																
10.520	3.0	59.1	46.2	37.1	5.1	-34.4	0.0	0.8	-27.6	-40.5	-7.0	-27.0	-20.6	-13.5	V, Settings: 6E 69	
10.520	3.0	54.3	41.2	37.1	5.1	-34.4	0.0	0.8	-32.4	-45.5	-7.0	-27.0	-25.4	-18.5	H, Settings: 6E 69	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

RESTRICTED BANDEDGE (802.11a 40MHz MODE)

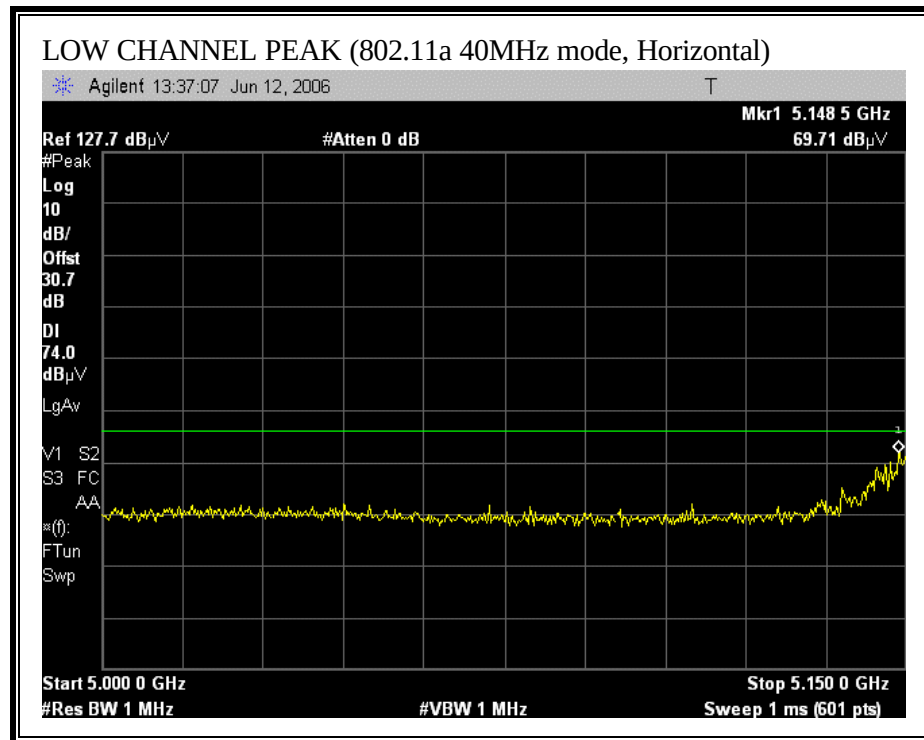


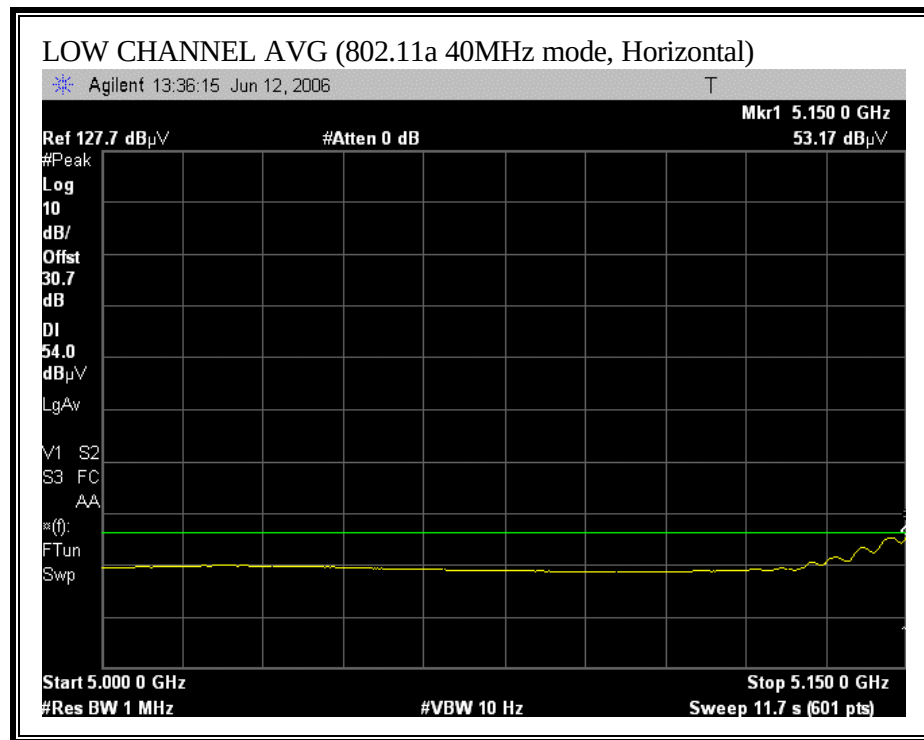


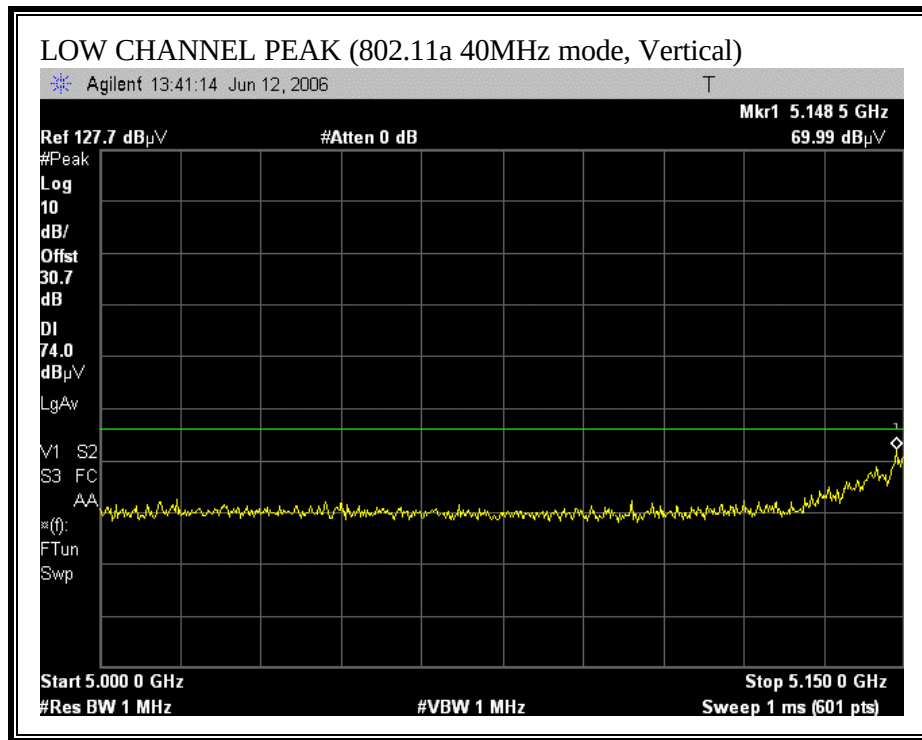


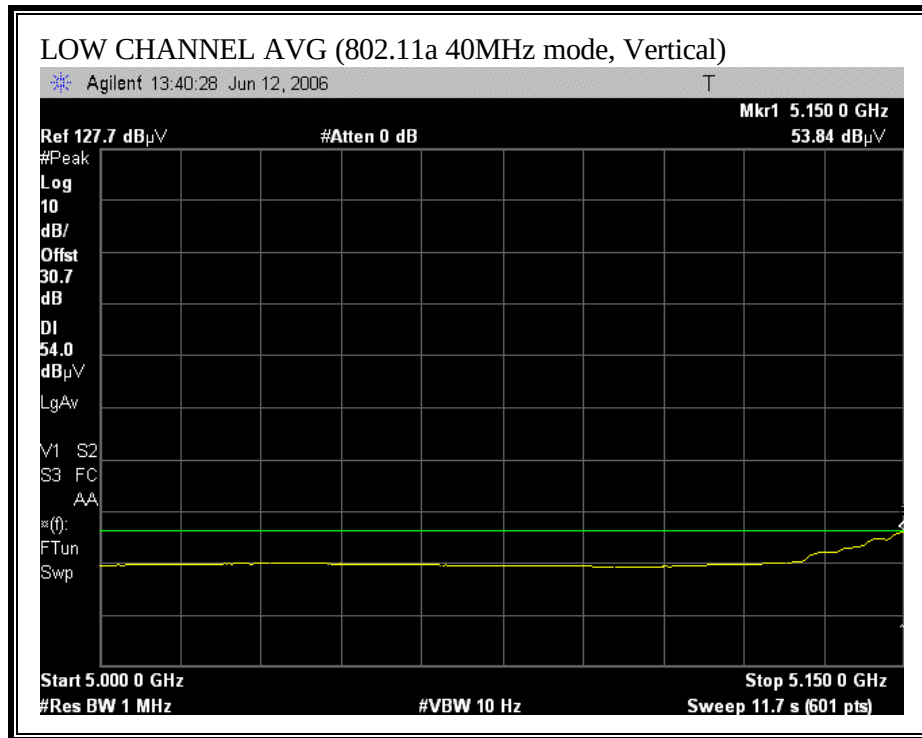


RESTRICTED BANDEDGE (802.11a 40MHz mode, HIGH CHANNEL)

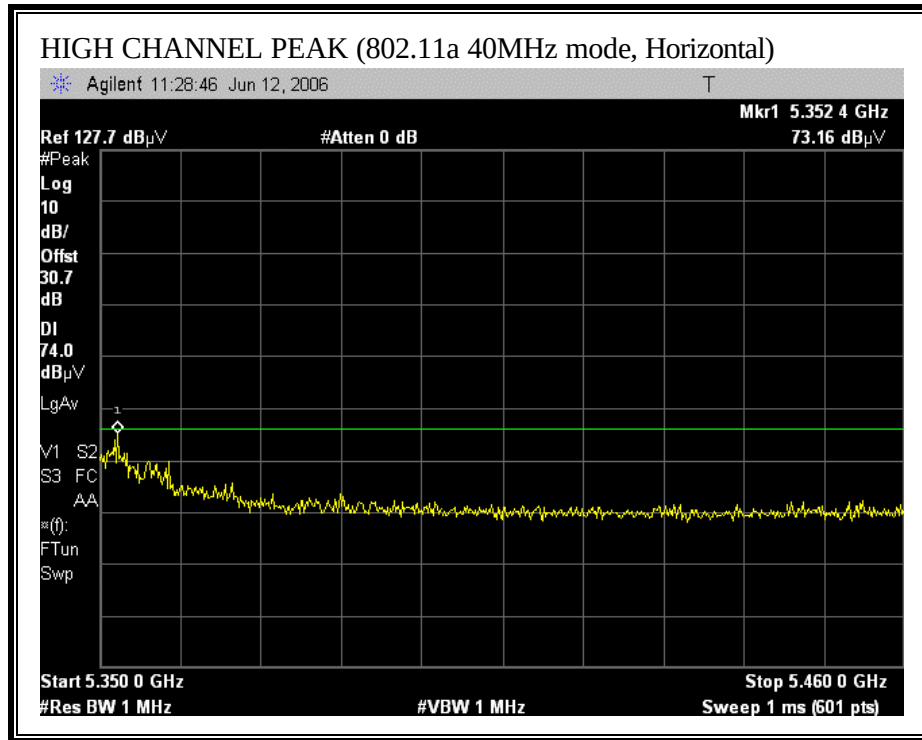

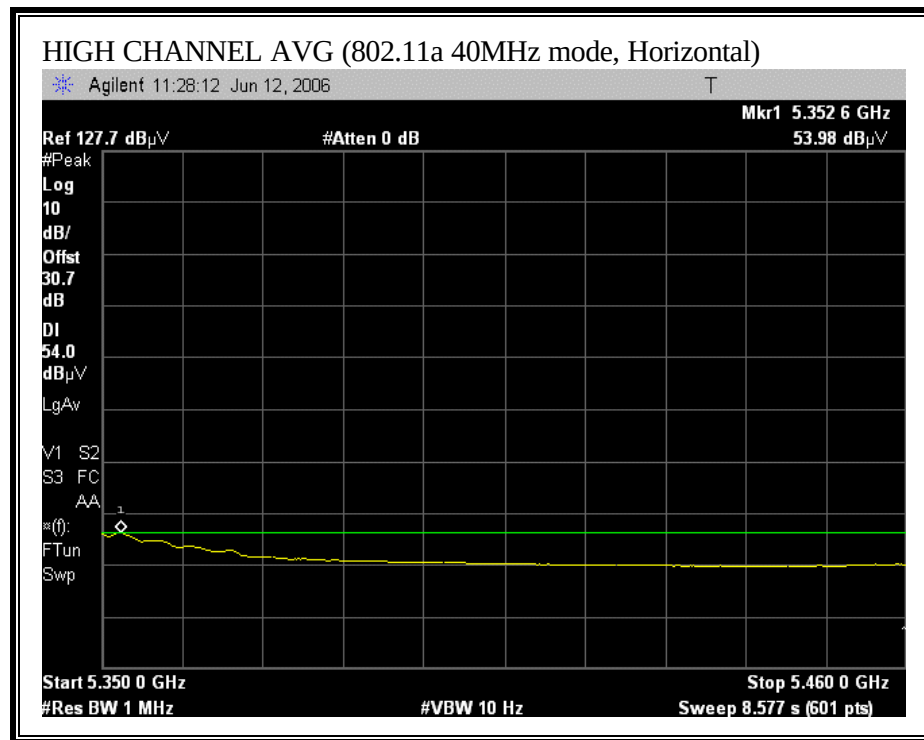

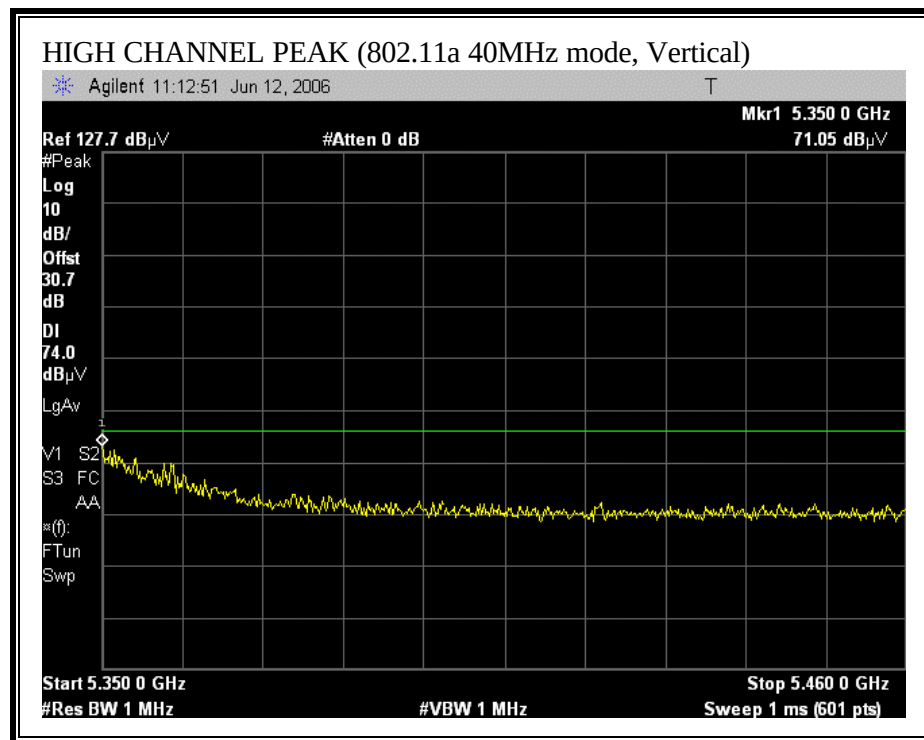

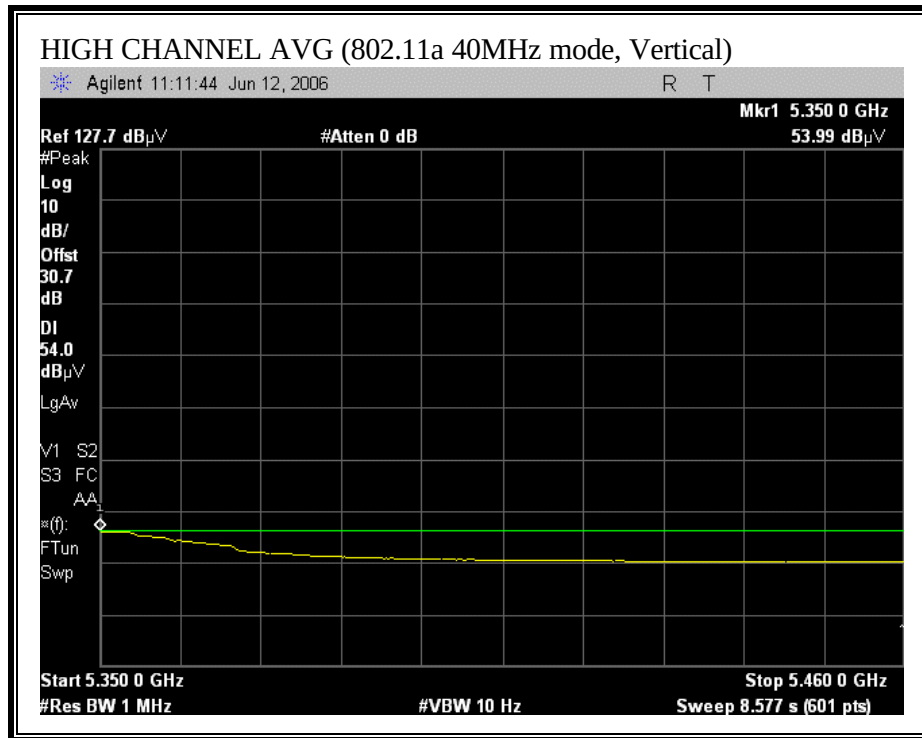


HARMONICS AND SPURIOUS EMISSIONS (802.11a 40MHz MODE)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/21/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)													
S/N:		099 (Modified EUT)													
Mode:		TX ON in 11a mode, 40 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0050								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5190 MHz)															
15.570	3.0	44.7	31.9	38.0	6.2	-32.3	0.0	0.7	57.4	44.5	74	54	-16.6	-9.5	V, Noise Floor, Settings: 60 5F
15.570	3.0	44.9	31.6	38.0	6.2	-32.3	0.0	0.7	57.6	44.3	74	54	-16.4	-9.7	H, Noise Floor, Settings: 60 5F
Middle Channel (5270 MHz)															
15.810	3.0	47.5	34.5	37.4	6.3	-32.2	0.0	0.7	59.7	46.7	74	54	-14.3	-7.3	V, Noise Floor, Settings: 74 6B
15.810	3.0	45.7	32.4	37.4	6.3	-32.2	0.0	0.7	57.9	44.6	74	54	-16.1	-9.4	H, Noise Floor, Settings: 74 6B
High Channel (5310 MHz)															
10.620	3.0	51.0	36.7	37.1	5.1	-34.3	0.0	0.8	59.7	45.4	74	54	-14.3	-8.6	V, Settings: 5B 58
10.620	3.0	50.9	37.7	37.1	5.1	-34.3	0.0	0.8	59.6	46.4	74	54	-14.4	-7.6	H, Settings: 5B 58
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit															


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		Marvell																	
Project #:		06U10359																	
Date:		06/28/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)																	
S/N:		099 (Modified EUT)																	
Mode:		TX ON in 11a mode, 40 MHz BW																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T73; S/N: 6717 @3m				1145 Agilent 3008A0050															
RF Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001				HPF_7.6GHz							
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBm	Avg dBm	Pk Lim dBm	Avg Lim dBm	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Middle Channel (5270 MHz)																			
10.540	3.0	58.3	46.1	37.1	5.1	-34.4	0.0	0.8	-28.3	-40.5	-7.0	-27.0	-21.3	-13.5	V, Settings: 74 6B				
10.540	3.0	53.6	40.8	37.1	5.1	-34.4	0.0	0.8	-33.0	-45.8	-7.0	-27.0	-26.0	-18.8	H, Settings: 74 6B				
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)

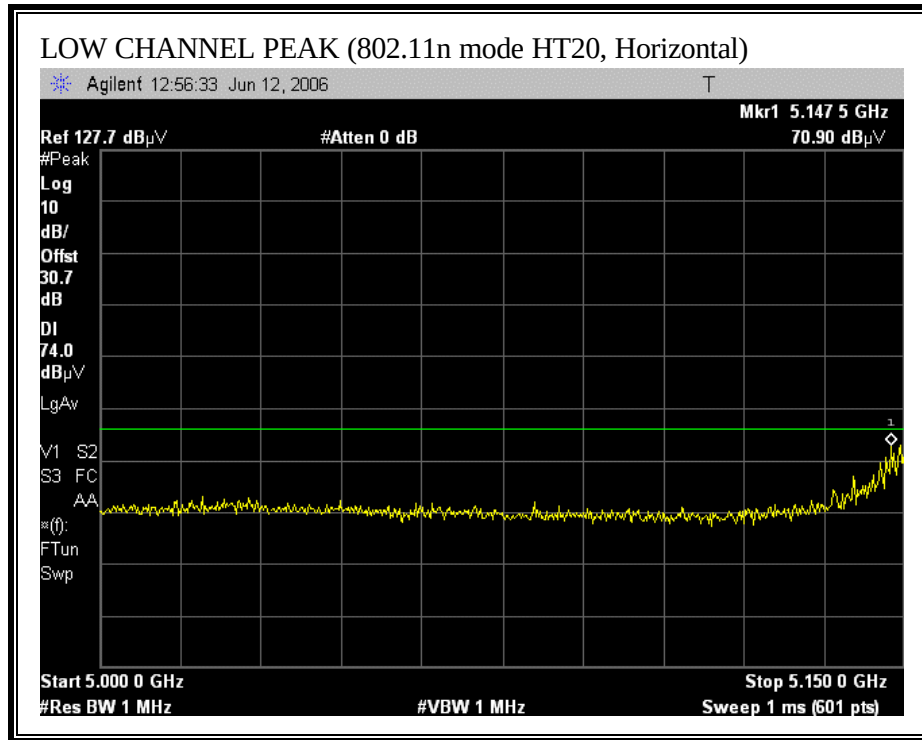


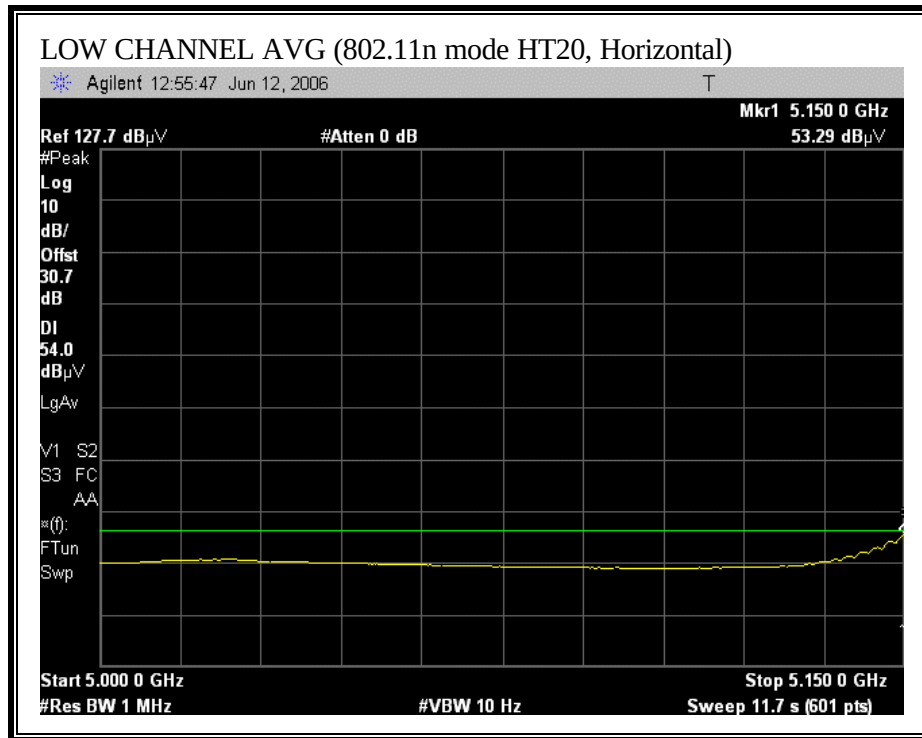


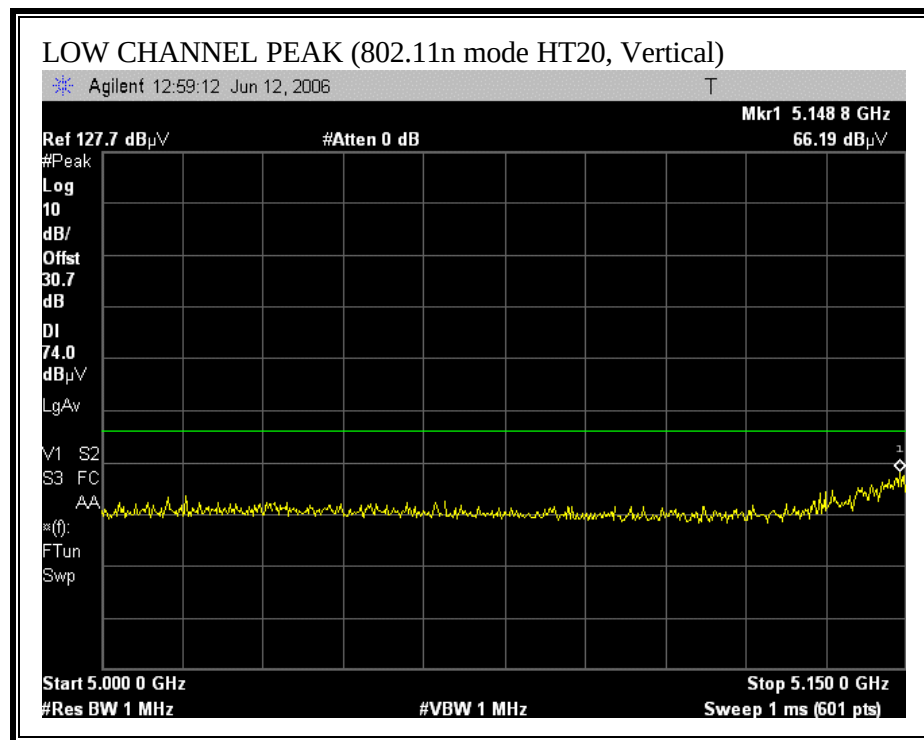


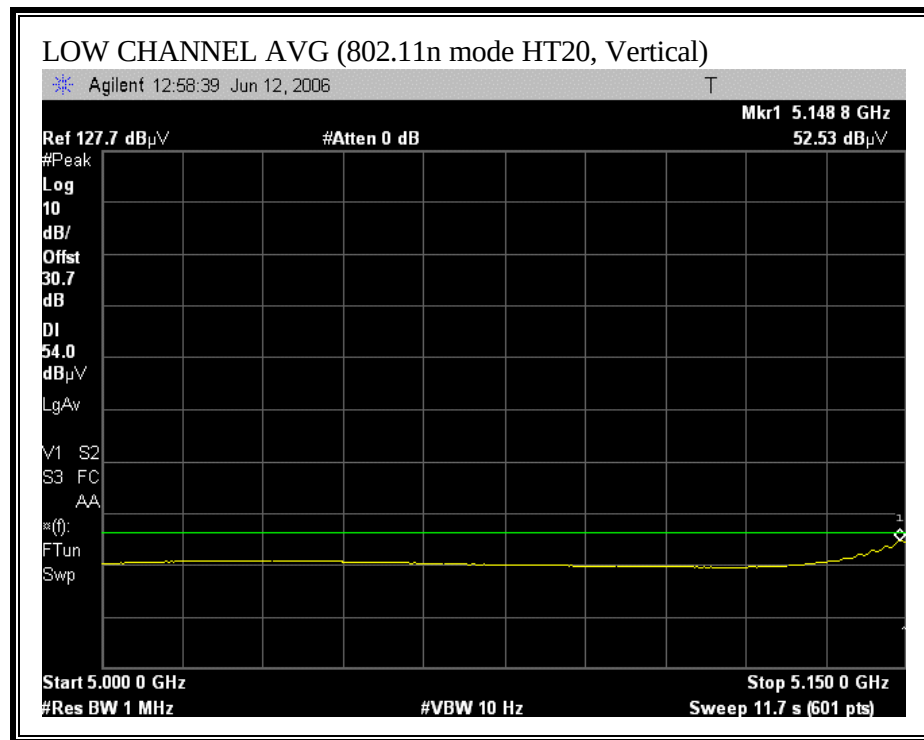


RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)

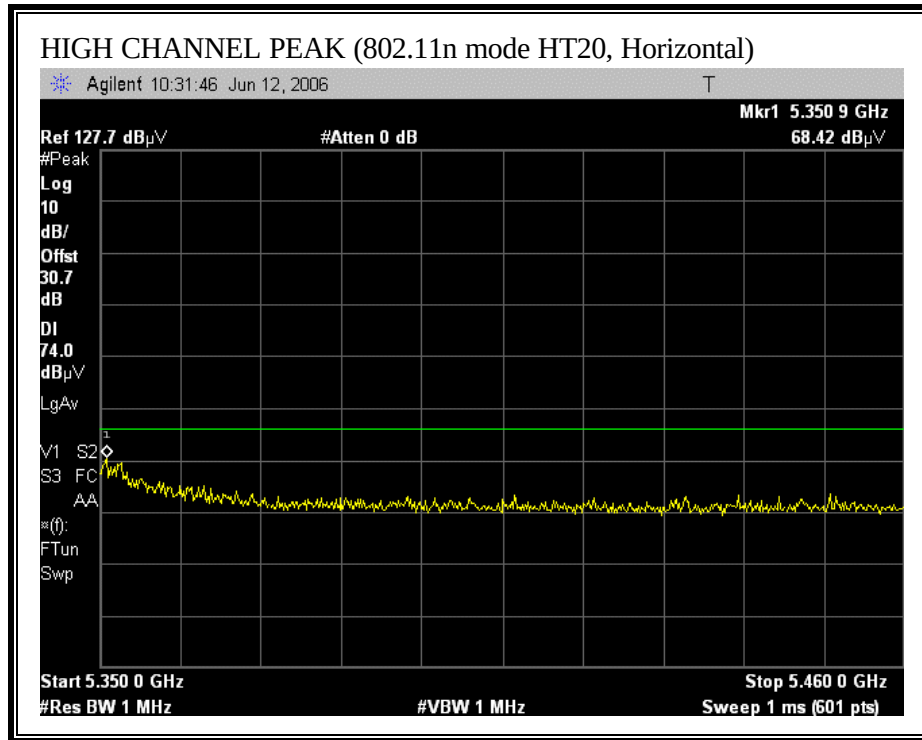

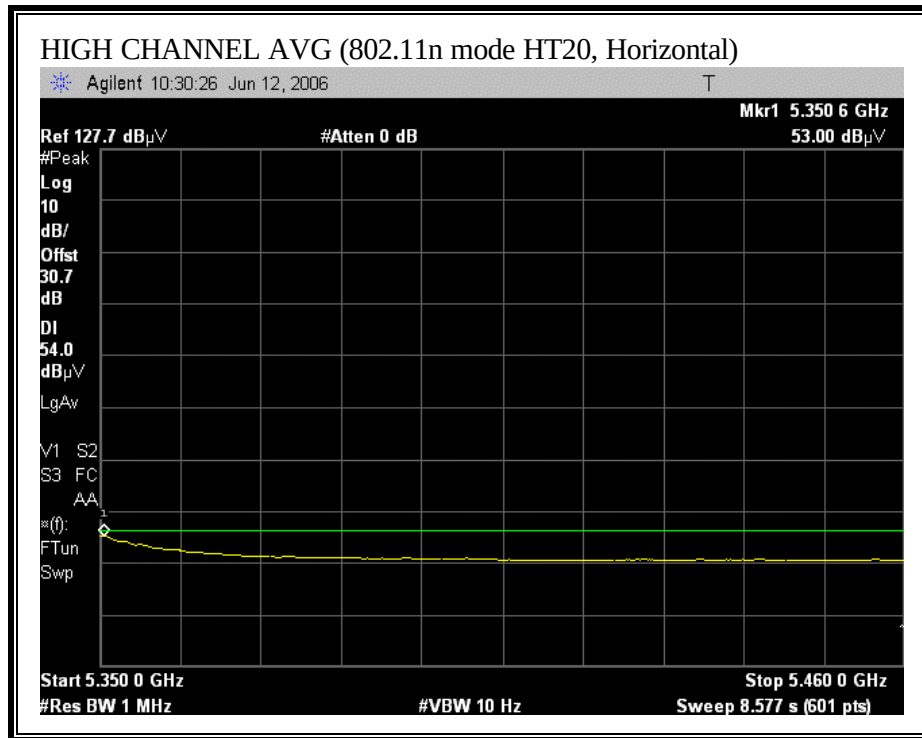

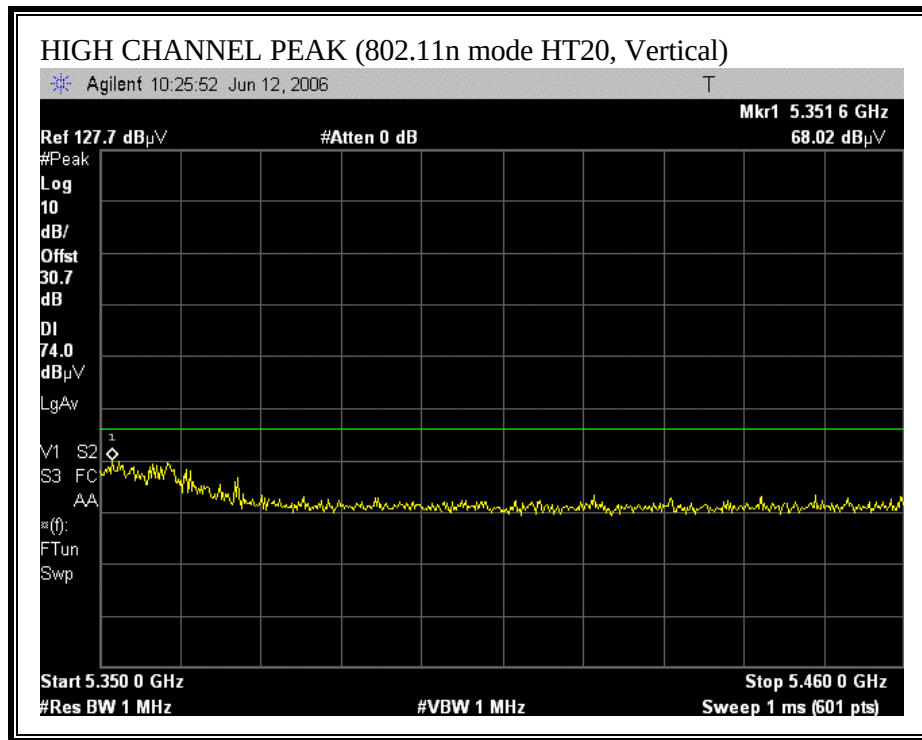

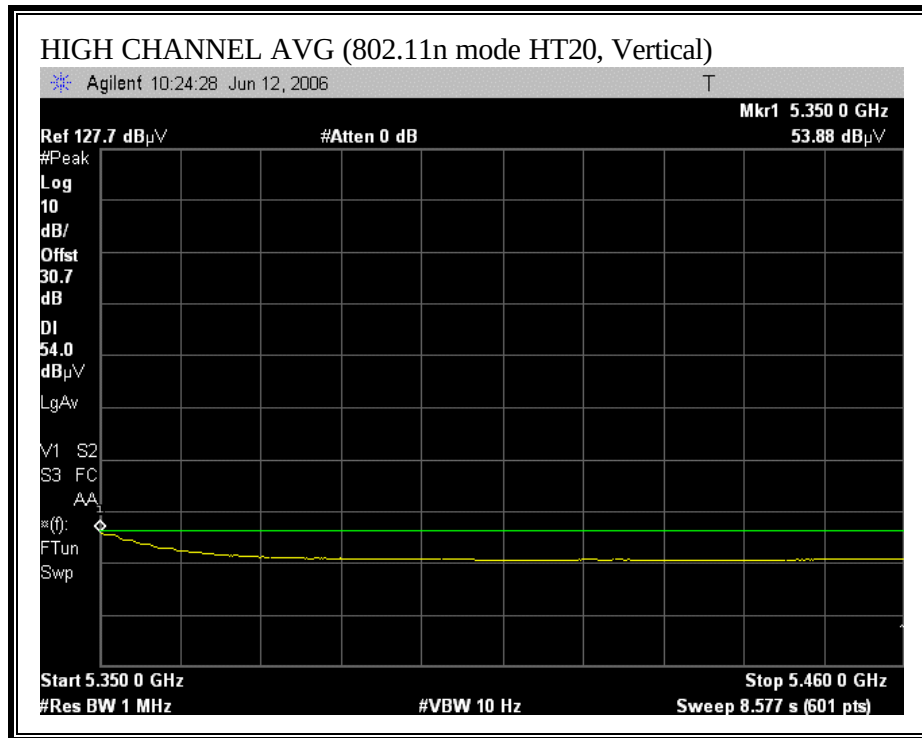


HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/21/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)													
S/N:		099 (Modified EUT)													
Mode:		TX ON in HT mode, 20 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0050								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5180 MHz)															
15.540	3.0	49.2	32.4	38.1	6.2	-32.3	0.0	0.7	61.9	45.2	74	54	-12.1	-8.8	V, Settings: 69 66
15.540	3.0	46.0	32.1	38.1	6.2	-32.3	0.0	0.7	58.8	44.8	74	54	-15.2	-9.2	H, Settings: 69 66
Middle Channel (5260 MHz)															
15.780	3.0	49.1	35.6	37.5	6.3	-32.2	0.0	0.7	61.4	47.9	74	54	-12.6	-6.1	V, Settings: 6E 68
15.780	3.0	46.2	34.4	37.5	6.3	-32.2	0.0	0.7	58.5	46.7	74	54	-15.5	-7.3	H, Settings: 6E 68
High Channel (5320 MHz)															
10.640	3.0	55.6	42.0	37.1	5.1	-34.2	0.0	0.8	64.4	50.7	74	54	-9.6	-3.3	V, Settings: 60 5E
10.640	3.0	55.4	42.5	37.1	5.1	-34.2	0.0	0.8	64.1	51.2	74	54	-9.9	-2.8	H, Settings: 60 5E
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit															


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company:		Marvell														
Project #:		06U10359														
Date:		06/28/06														
Test Engineer:		Frank Ibrahim														
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)														
S/N:		099 (Modified EUT)														
Mode:		TX ON in HT mode, 20 MHz BW														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T73; S/N: 6717 @3m				1145 Agilent 3008A0050												
RF Frequency Cables																
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
				Frank 177080001				Frank 187209001				HPF_7.6GHz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBm	Avg dBm	Pk Lim dBm	Avg Lim dBm	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Middle Channel (5260 MHz)																
10.520	3.0	58.1	45.3	37.1	5.1	-34.4	0.0	0.8	-28.6	-41.4	-7.0	-27.0	-21.6	-14.4	V, Settings: 6E 68	
10.520	3.0	53.5	40.3	37.1	5.1	-34.4	0.0	0.8	-33.2	-46.4	-7.0	-27.0	-26.2	-19.4	H, Settings: 6E 68	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)

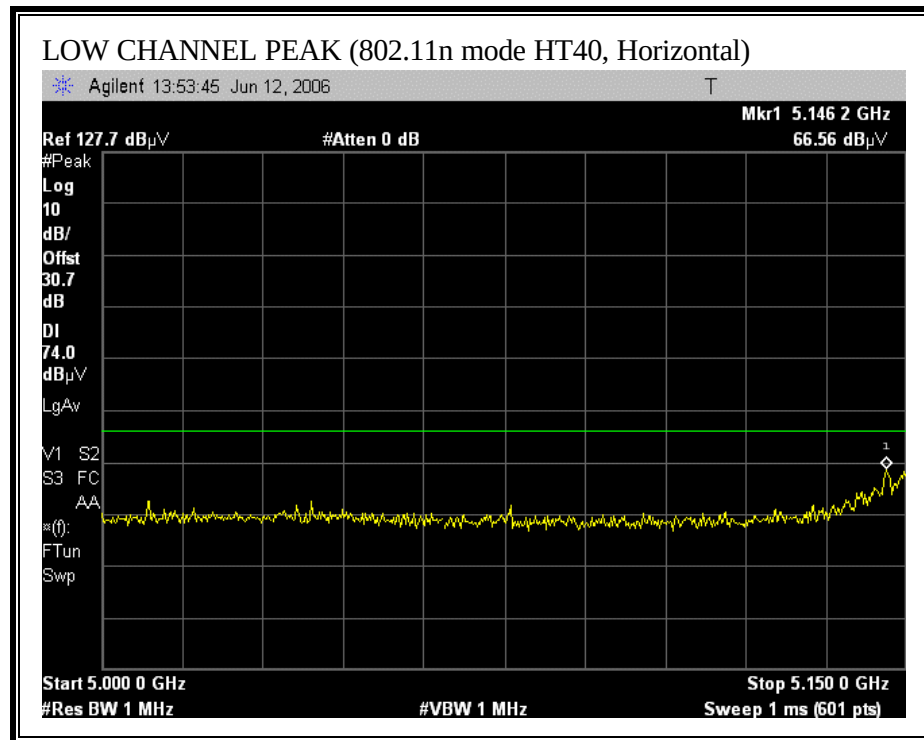


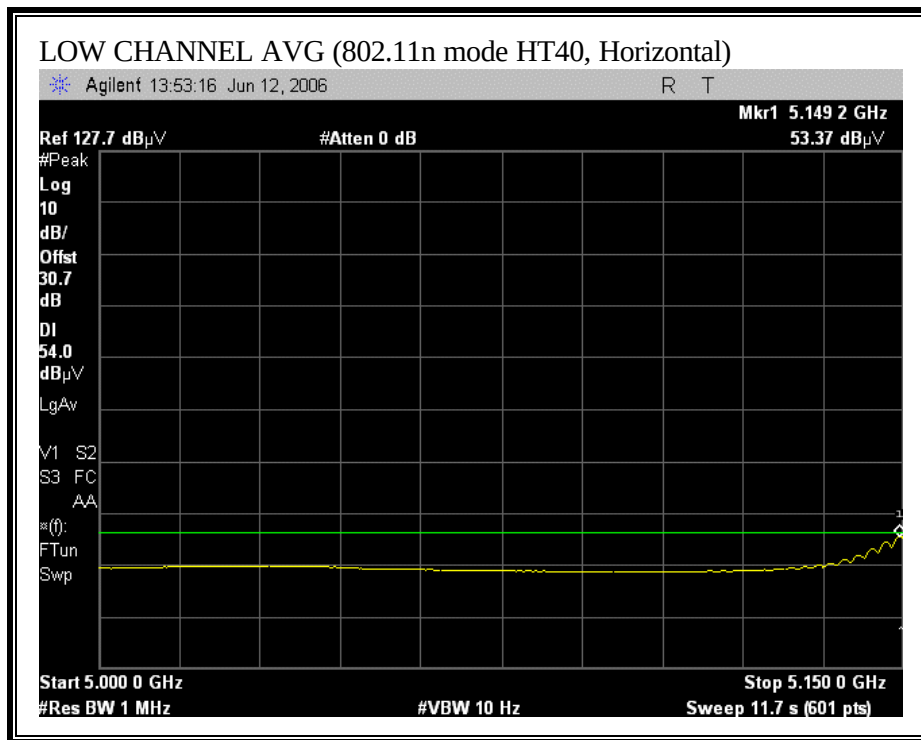


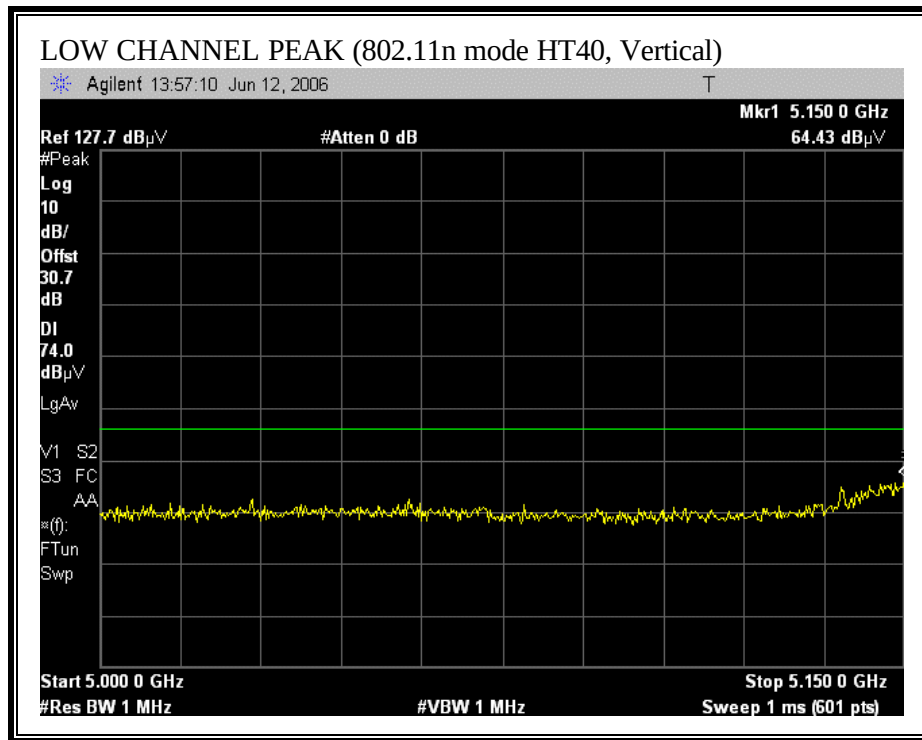


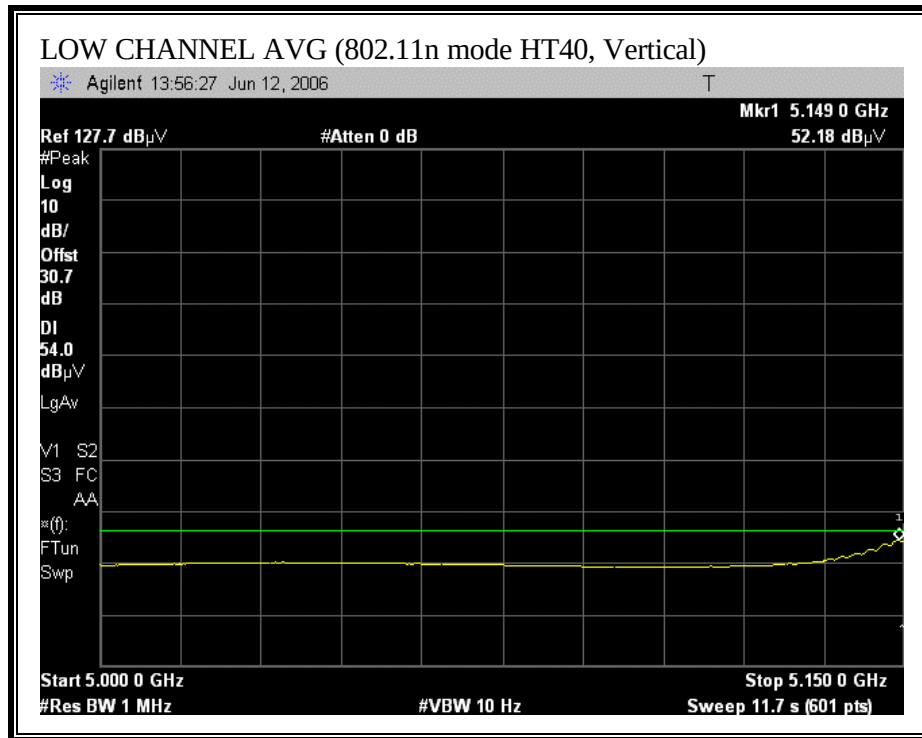


RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)

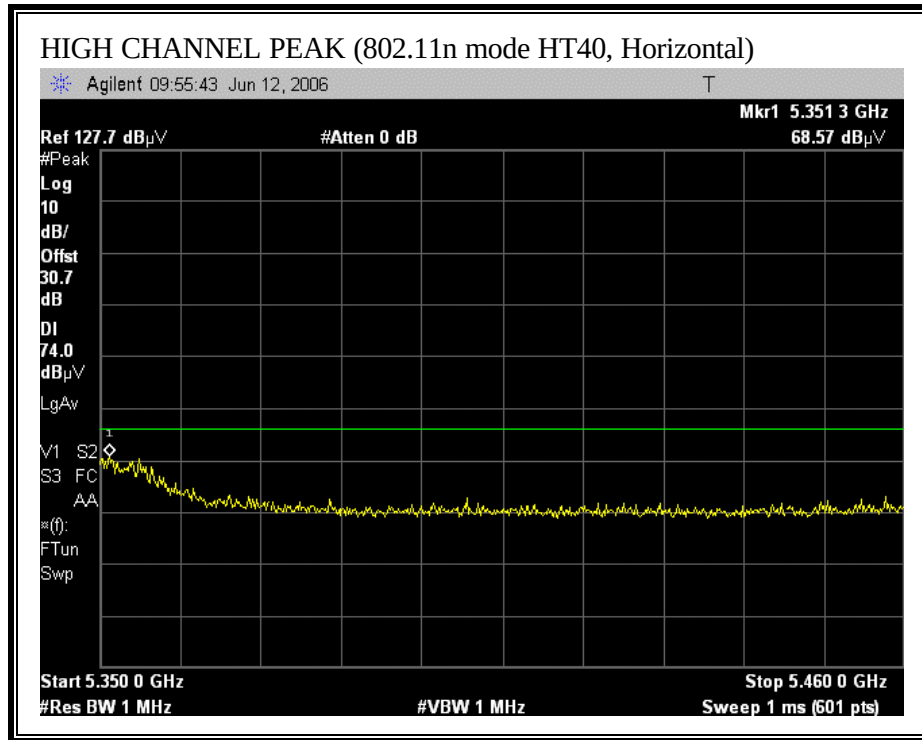

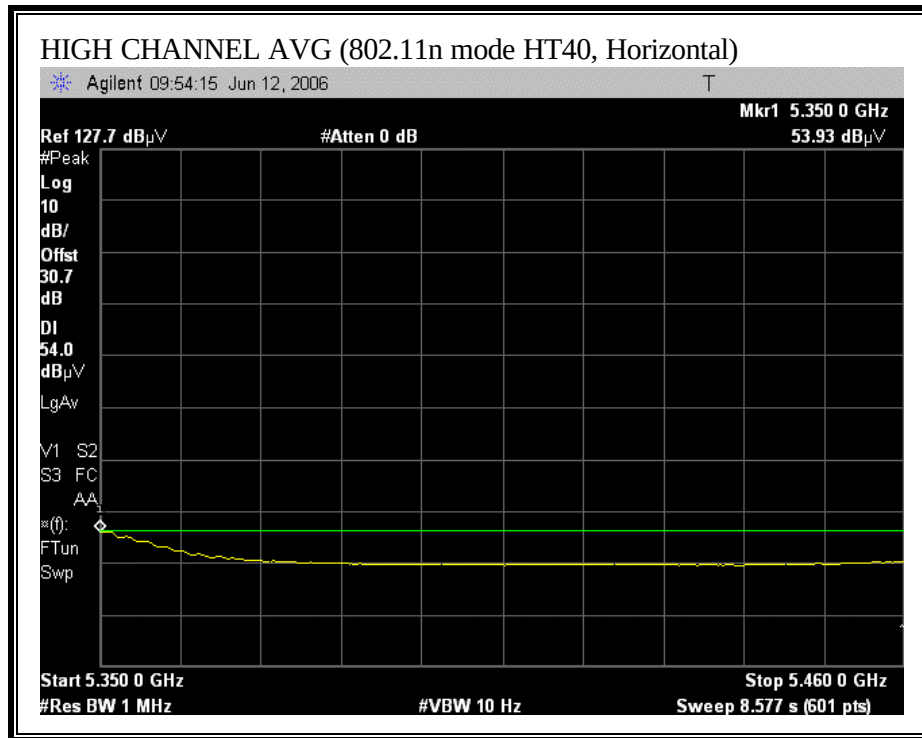

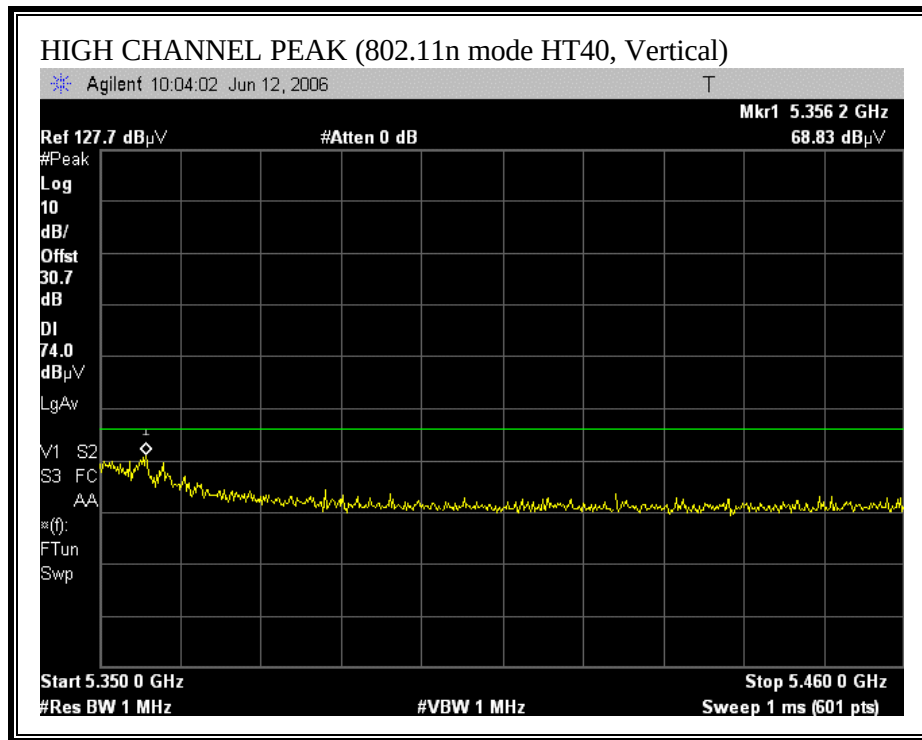

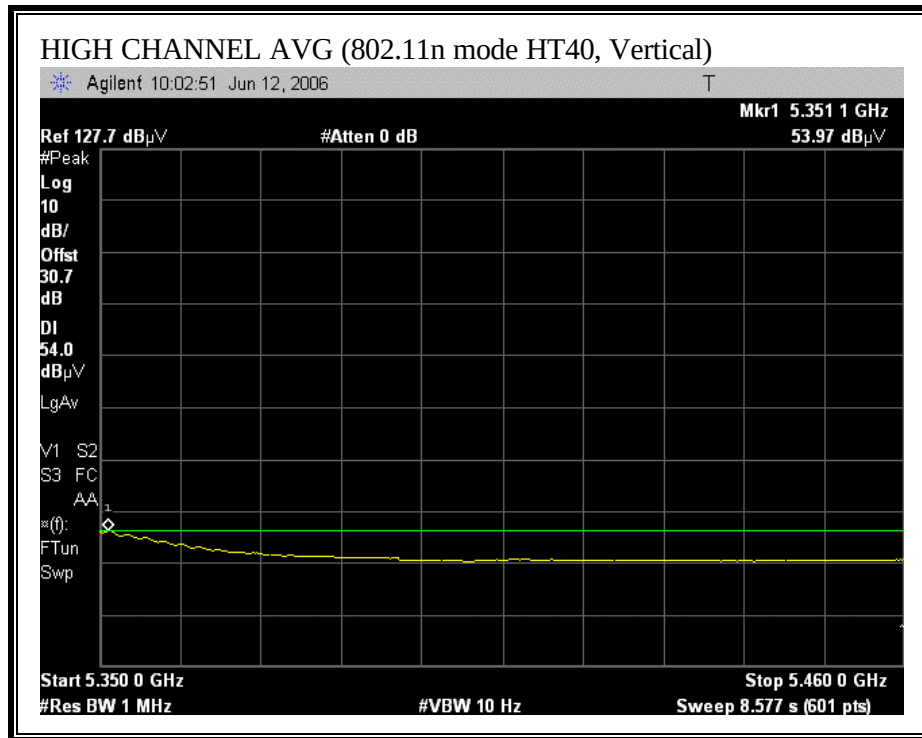

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/21/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX antennas (InputA=4, InputB=1)													
S/N:		099 (Modified EUT)													
Mode:		TX ON in HT mode, 40 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0051								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5190 MHz)															
15.570	3.0	44.4	31.4	38.0	6.2	-32.3	0.0	0.7	57.1	44.1	74	54	-16.9	-9.9	V, Noise Floor, Settings: 61 5F
15.570	3.0	44.5	31.2	38.0	6.2	-32.3	0.0	0.7	57.2	43.9	74	54	-16.8	-10.1	H, Noise Floor, Settings: 61 5F
Middle Channel (5270 MHz)															
15.810	3.0	45.6	33.2	37.4	6.3	-32.2	0.0	0.7	57.8	45.4	74	54	-16.2	-8.6	V, Settings: 6E 69
15.810	3.0	44.6	31.5	37.4	6.3	-32.2	0.0	0.7	56.8	43.7	74	54	-17.2	-10.3	H, Noise Floor, Settings: 6E 69
High Channel (5310 MHz)															
10.620	3.0	46.1	35.0	37.1	5.1	-34.3	0.0	0.8	54.8	43.7	74	54	-19.2	-10.3	V, Settings: 5D 5A
10.620	3.0	45.3	34.7	37.1	5.1	-34.3	0.0	0.8	54.0	43.4	74	54	-20.0	-10.6	H, Noise Floor, Settings: 5D 5A
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit															


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


7.2.3. TRANSMITTER ABOVE 1 GHz FOR 5150 TO 5350 MHz BAND- Duck


RESTRICTED BANDEDGE (802.11a MODE, LOW CHANNEL)

Duck Antenna

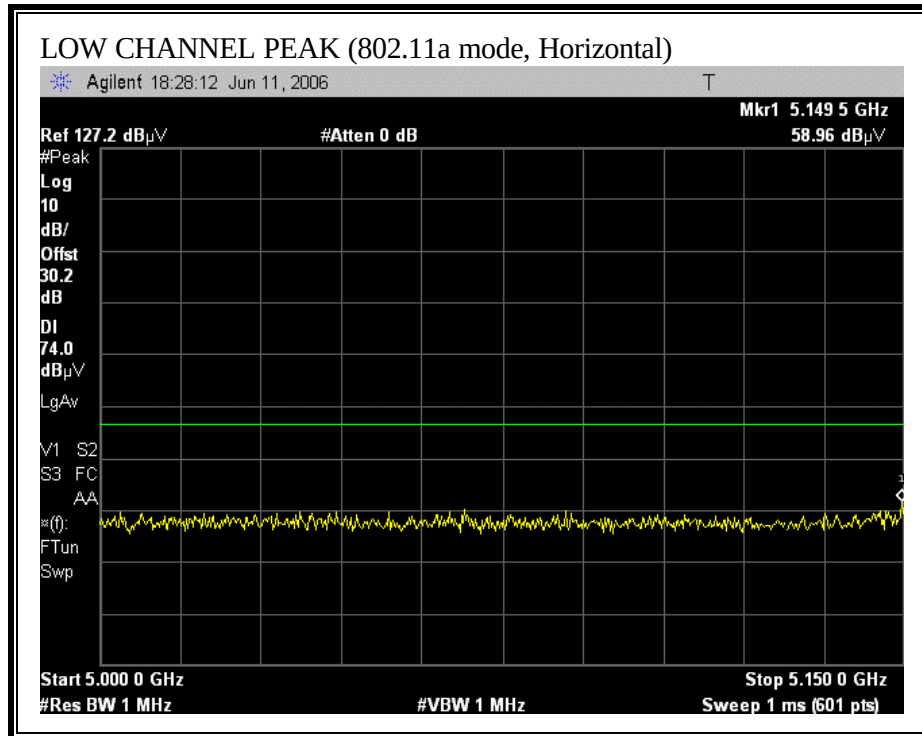


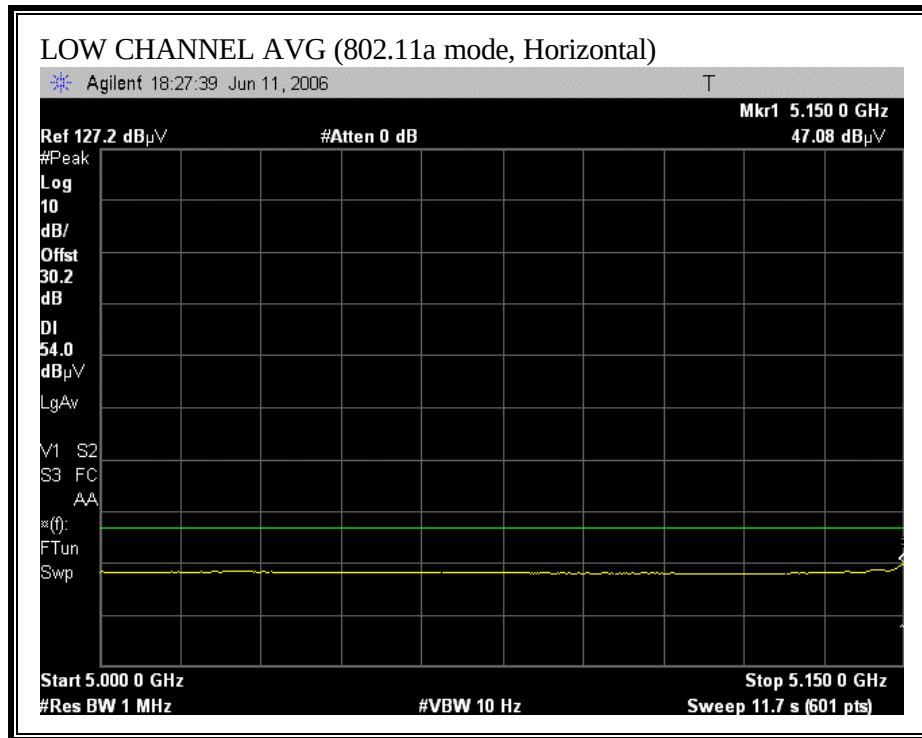


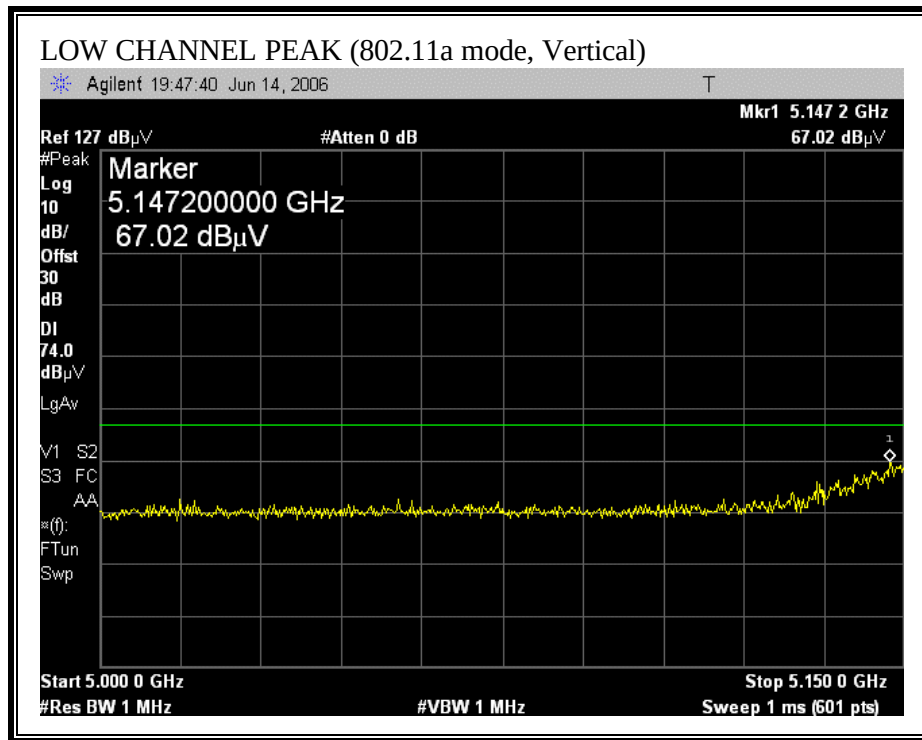


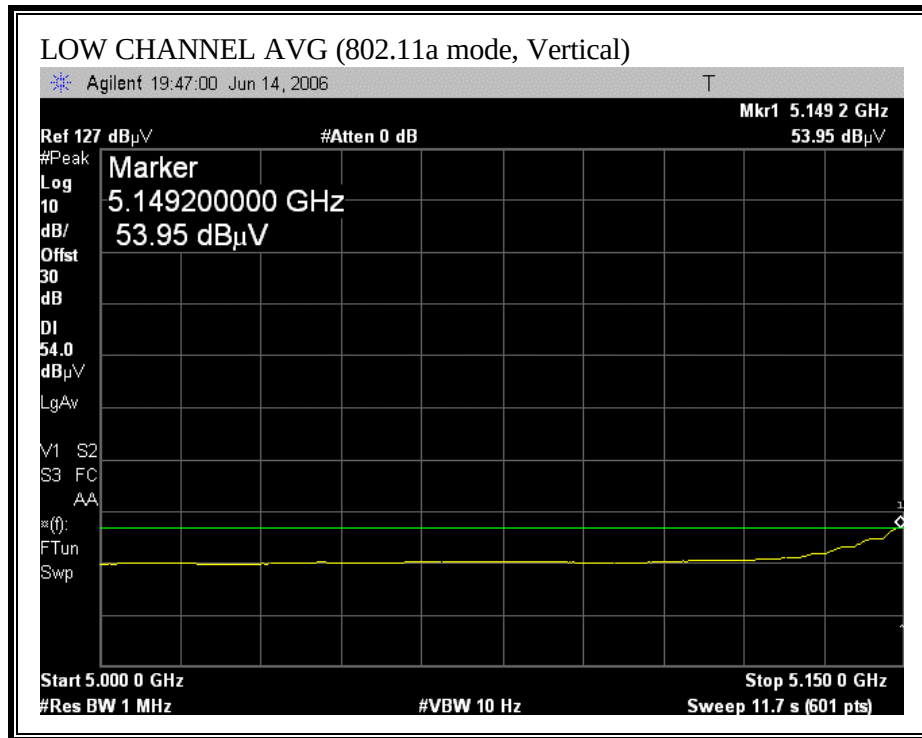


RESTRICTED BANDEDGE (802.11a MODE, HIGH CHANNEL)

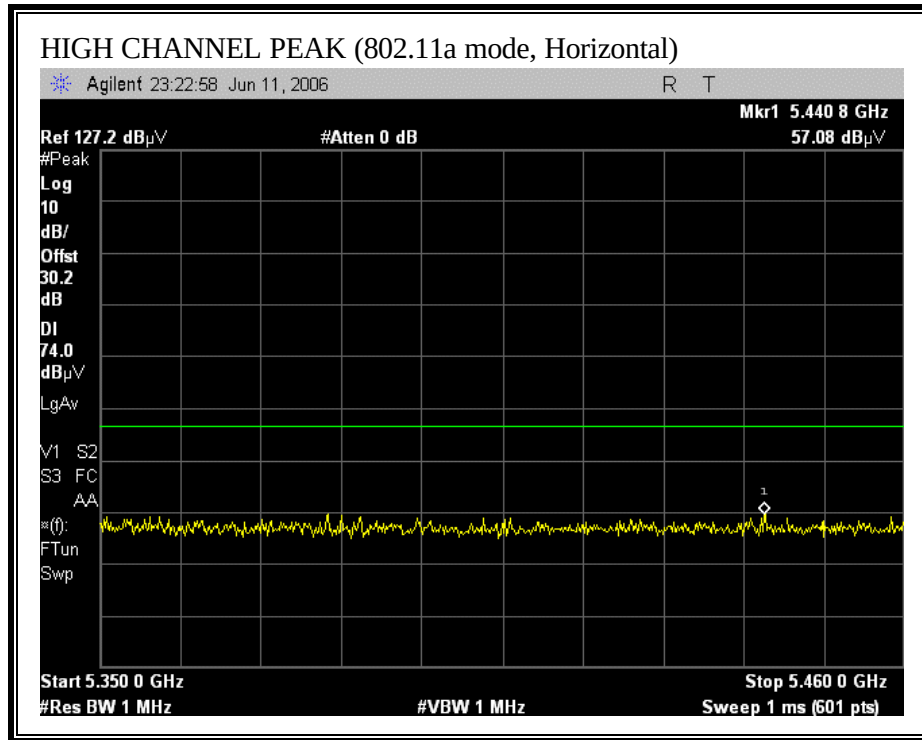

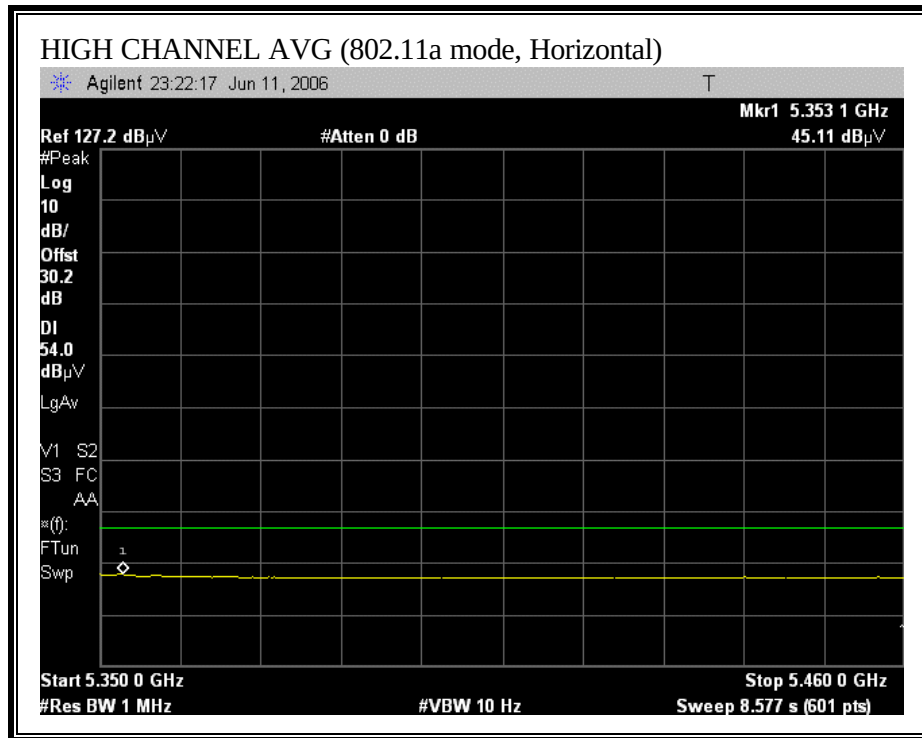

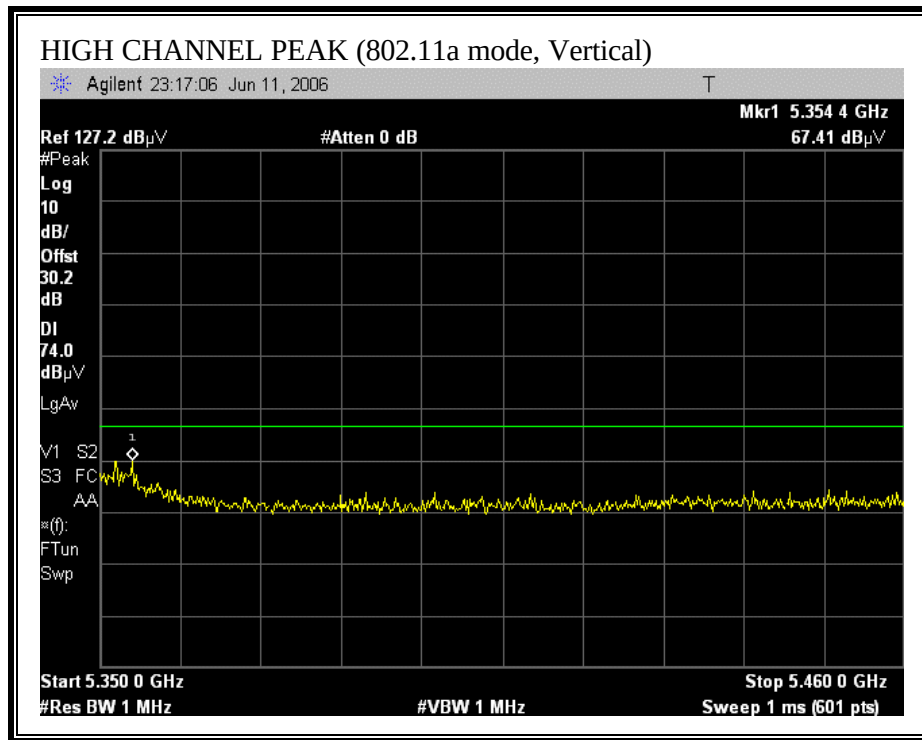

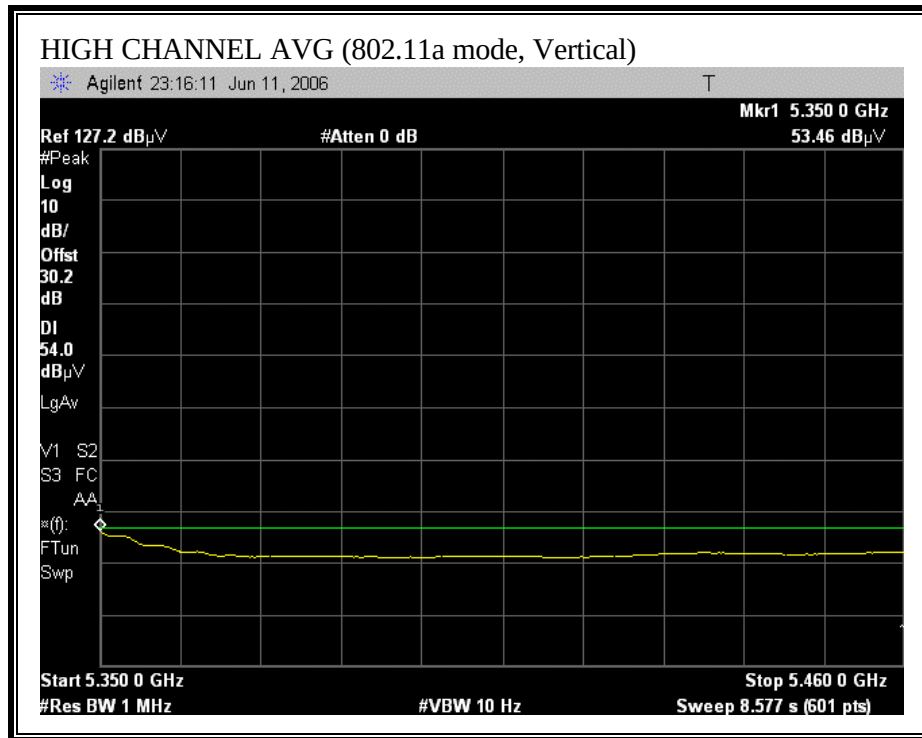


HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/21/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host Laptop PC, EUT connected to two TX Duck antennas													
S/N:		099 (Modified EUT)													
Mode:		TX ON in 11a mode, 20 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0051								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5180 MHz)															
15.540	3.0	50.3	39.1	38.1	6.2	-32.3	0.0	0.7	63.1	51.8	74	54	-10.9	-2.2	V, Settings: 6C 68
15.540	3.0	45.4	31.8	38.1	6.2	-32.3	0.0	0.7	58.1	44.5	74	54	-15.9	-9.5	H, Settings: 6C 68
Middle Channel (5260 MHz)															
15.780	3.0	48.7	36.2	37.5	6.3	-32.2	0.0	0.7	61.0	48.5	74	54	-13.0	-5.5	V, Settings: 6E 69
15.780	3.0	46.5	34.4	37.5	6.3	-32.2	0.0	0.7	58.8	46.7	74	54	-15.2	-7.3	H, Settings: 6E 69
High Channel (5320 MHz)															
10.640	3.0	56.3	44.9	37.1	5.1	-34.2	0.0	0.8	65.0	53.6	74	54	-9.0	-0.4	V, Settings: 68 64
15.960	3.0	46.4	32.8	37.1	6.3	-32.2	0.0	0.7	58.3	44.8	74	54	-15.7	-9.2	V, Settings: 68 64
10.640	3.0	51.1	38.6	37.1	5.1	-34.2	0.0	0.8	59.9	47.3	74	54	-14.1	-6.7	H, Settings: 68 64
15.960	3.0	44.0	31.2	37.1	6.3	-32.2	0.0	0.7	55.9	43.1	74	54	-18.1	-10.9	H, Settings: 68 64
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		Marvell																	
Project #:		06U10359																	
Date:		06/28/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX Duck antennas																	
S/N:		099 (Modified EUT)																	
Mode:		TX ON in 11a mode, 20 MHz BW																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T73; S/N: 6717 @3m				1145 Agilent 3008A0050															
RF Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001				HPF_7.6GHz							
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBm	Avg dBm	Pk Lim dBm	Avg Lim dBm	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Middle Channel (5260 MHz)																			
10.520	3.0	60.7	47.8	37.1	5.1	-34.4	0.0	0.8	-25.9	-38.9	-7.0	-27.0	-18.9	-11.9	V, Settings: 6E 69				
10.520	3.0	55.5	42.3	37.1	5.1	-34.4	0.0	0.8	-31.2	-44.4	-7.0	-27.0	-24.2	-17.4	H, Settings: 6E 69				
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

RESTRICTED BANDEDGE (802.11a 40MHz MODE)

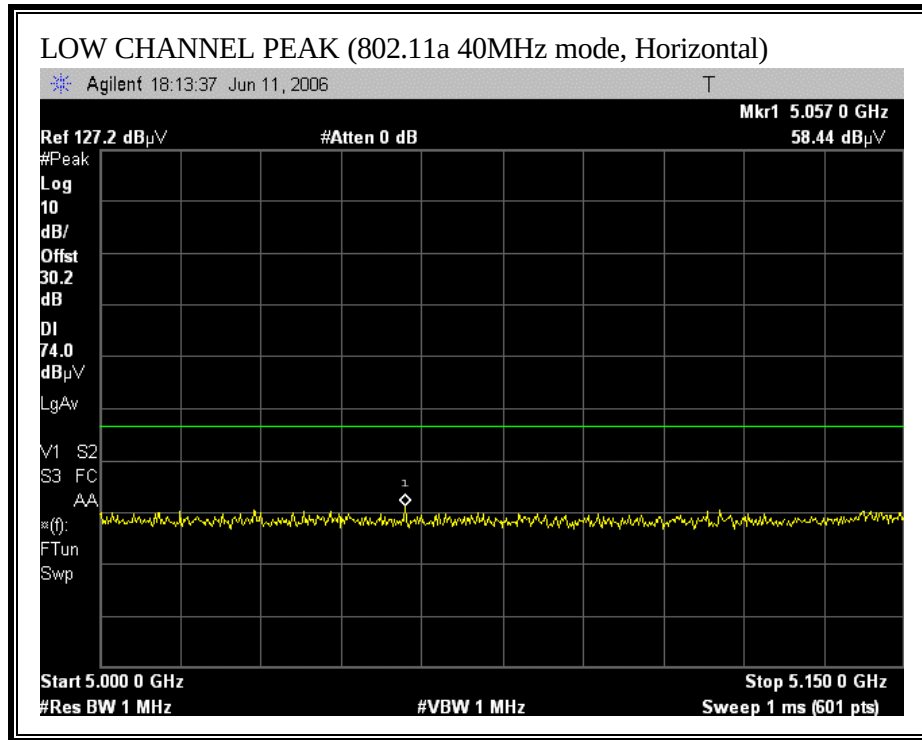


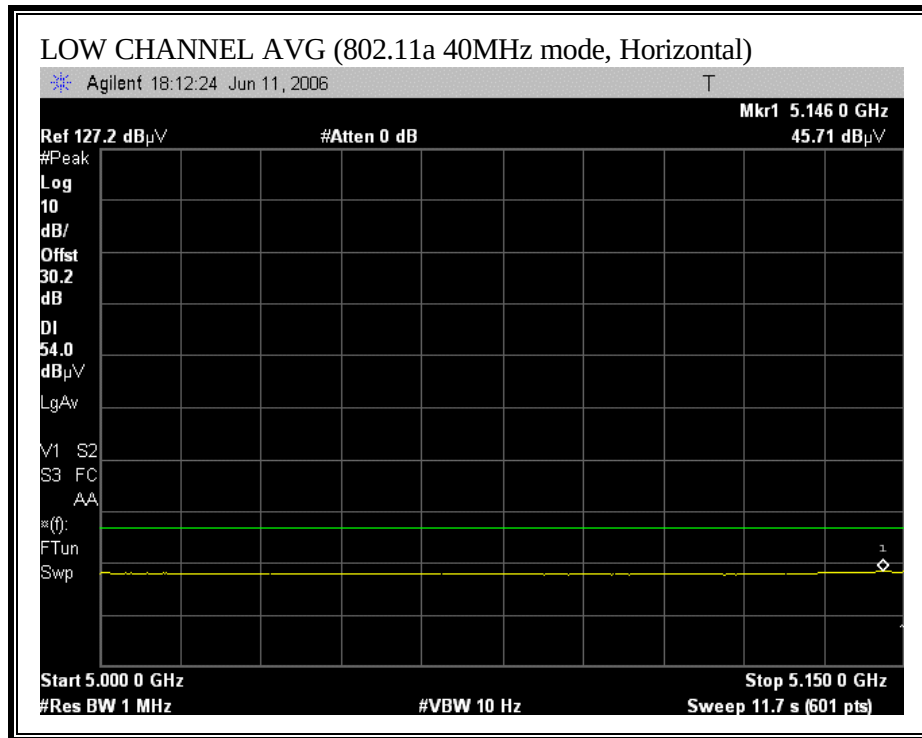


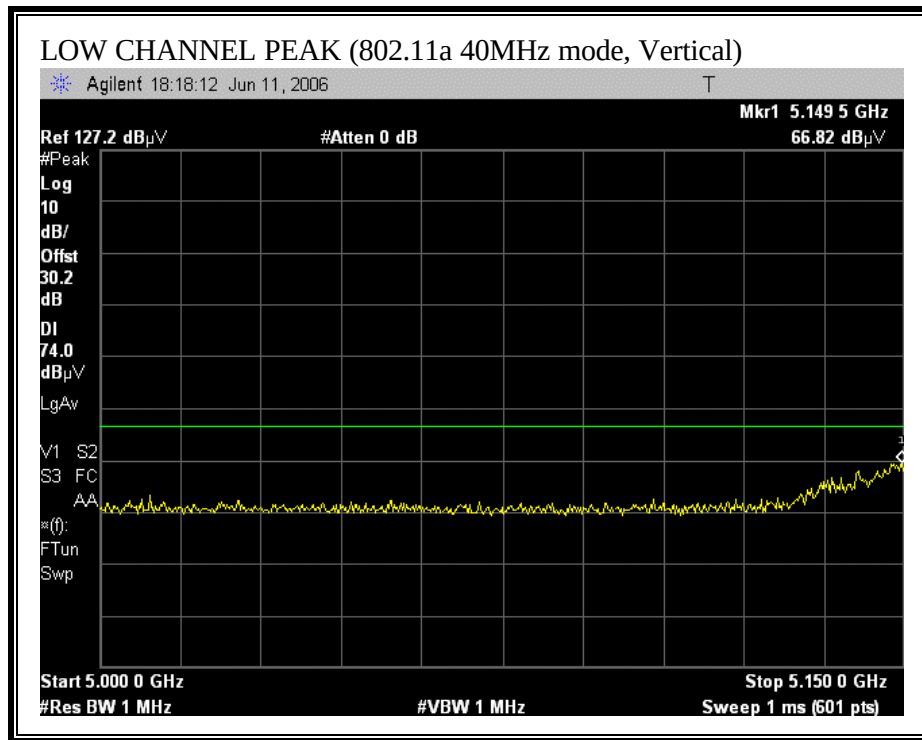


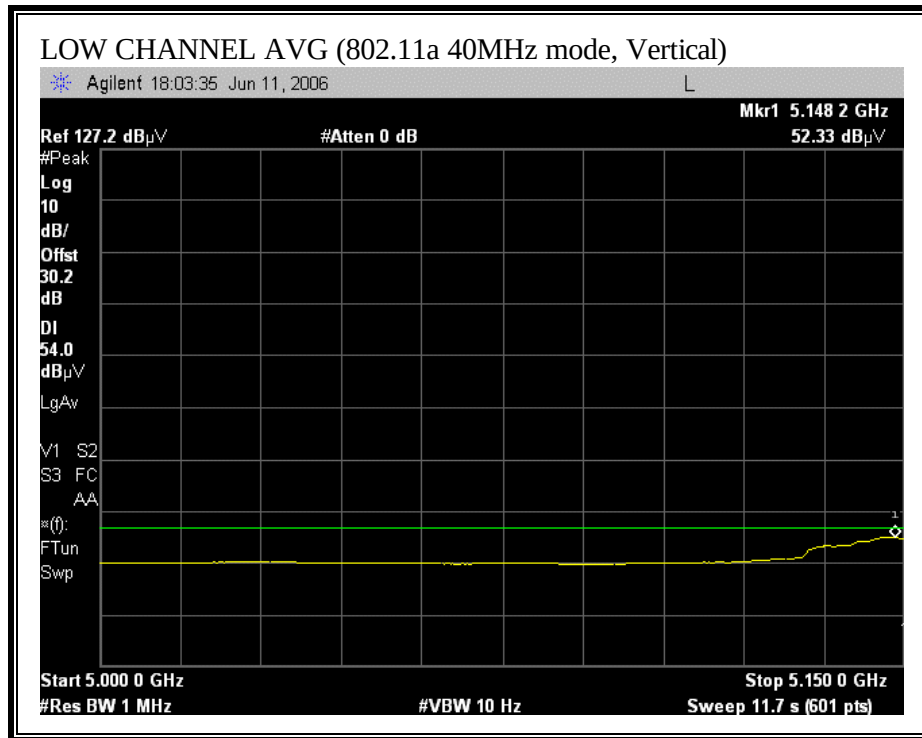


RESTRICTED BANDEDGE (802.11a 40MHz mode, HIGH CHANNEL)

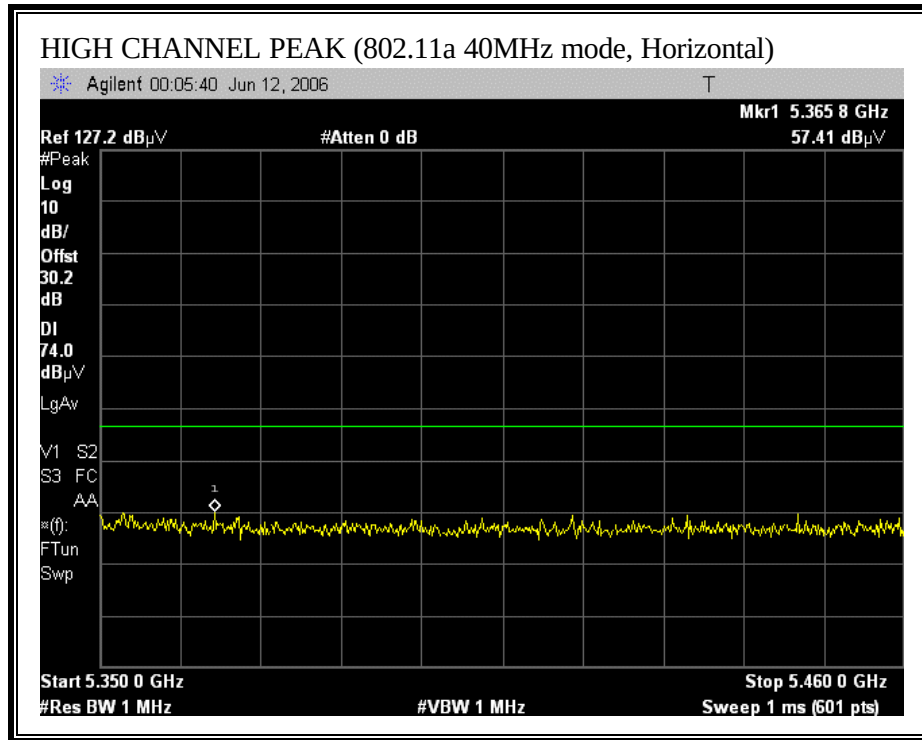

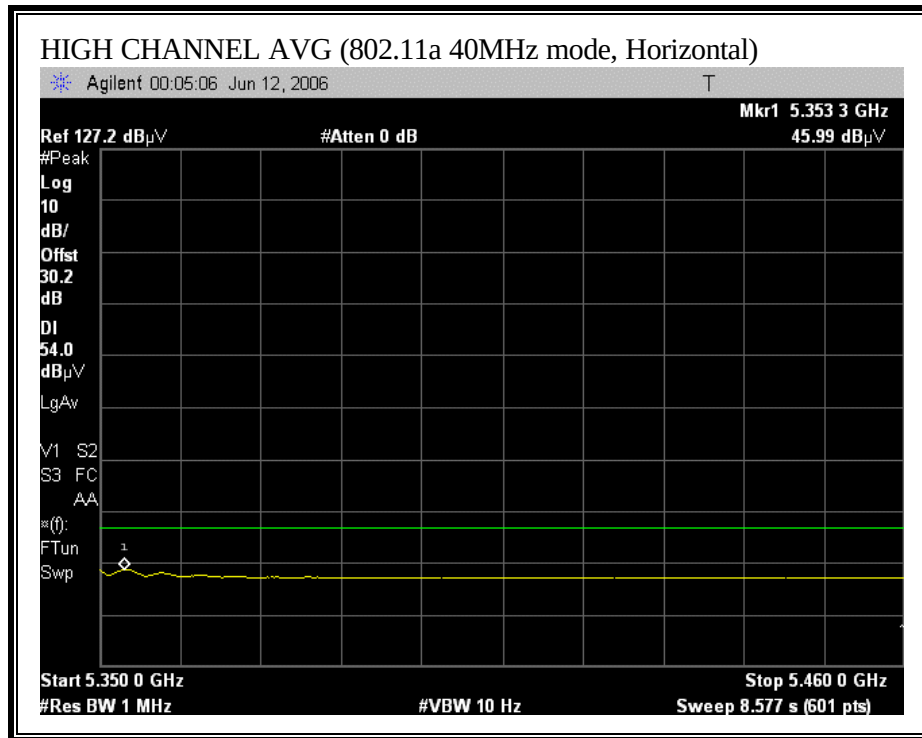

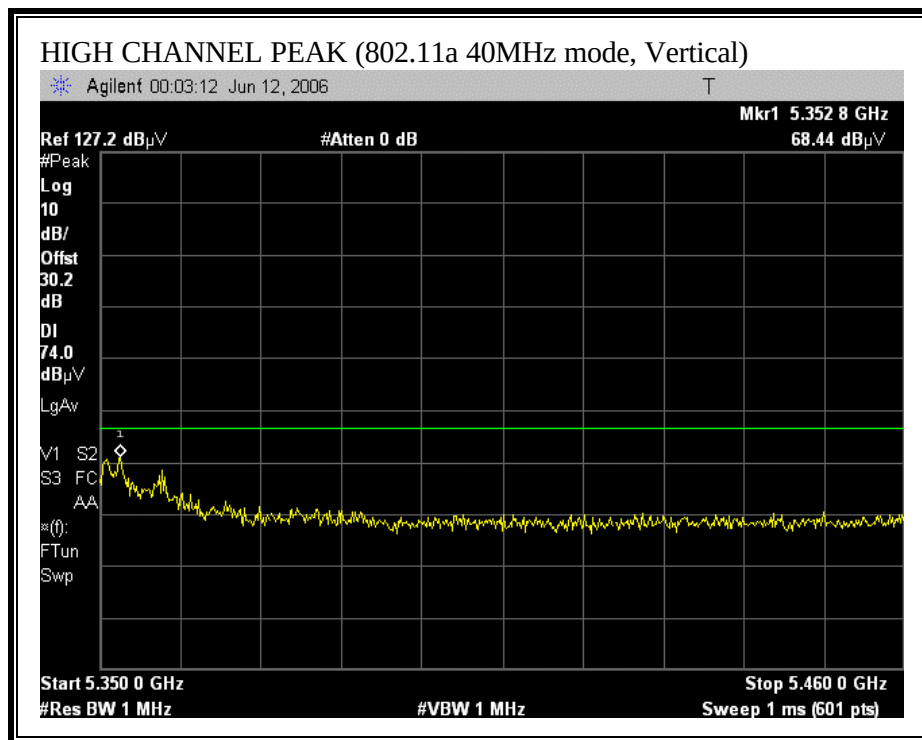

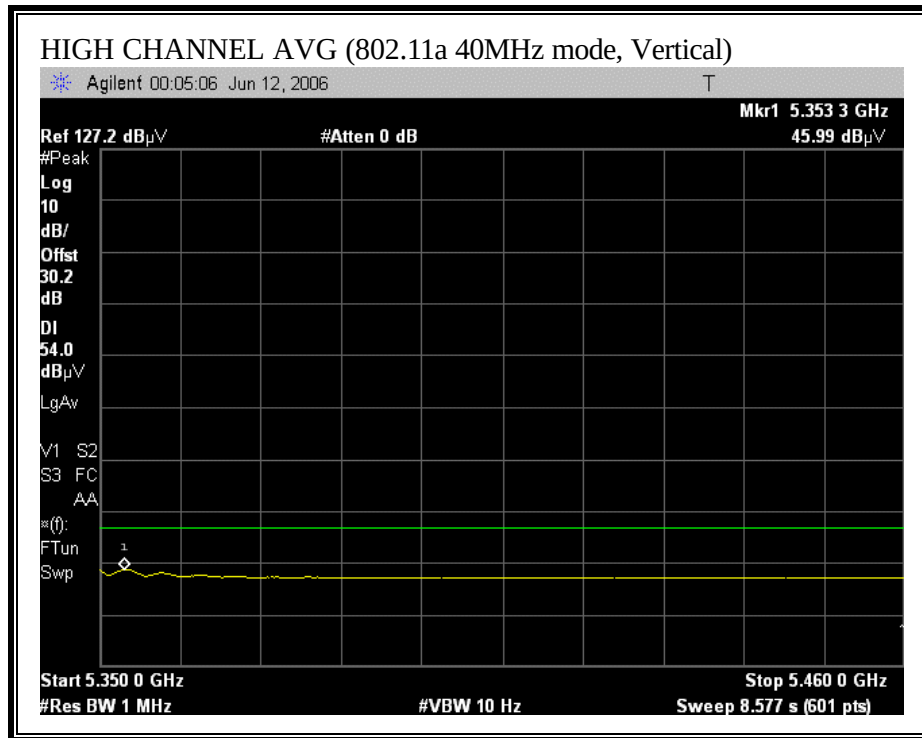


HARMONICS AND SPURIOUS EMISSIONS (802.11a 40MHz MODE)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/21/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX Duck antennas													
S/N:		099 (Modified EUT)													
Mode:		TX ON in 11a mode, 40 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0051								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5190 MHz)															
15.570	3.0	44.3	31.4	38.0	6.2	-32.3	0.0	0.7	57.0	44.1	74	54	-17.0	-9.9	V, Noise Floor, Settings: 5F 5E
15.570	3.0	43.7	30.6	38.0	6.2	-32.3	0.0	0.7	56.4	43.3	74	54	-17.6	-10.7	H, Noise Floor, Settings: 5F 5E
Middle Channel (5270 MHz)															
15.810	3.0	47.0	35.1	37.4	6.3	-32.2	0.0	0.7	59.2	47.3	74	54	-14.8	-6.7	V, Settings: 74 6B
15.810	3.0	43.2	30.9	37.4	6.3	-32.2	0.0	0.7	55.4	43.1	74	54	-18.6	-10.9	H, noise floor, Settings: 74 6B
High Channel (5310 MHz)															
10.620	3.0	48.6	35.7	37.1	5.1	-34.3	0.0	0.8	57.3	44.4	74	54	-16.7	-9.6	V, Settings: 5E 5B
10.620	3.0	44.6	31.2	37.1	5.1	-34.3	0.0	0.8	53.3	39.9	74	54	-20.7	-14.1	H, noise floor, Settings: 5E 5B
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit															


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company:		Marvell														
Project #:		06U10359														
Date:		06/28/06														
Test Engineer:		Frank Ibrahim														
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX Duck antennas														
S/N:		099 (Modified EUT)														
Mode:		TX ON in 11a mode, 40 MHz BW														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T73; S/N: 6717 @3m				T145 Agilent 3008A0050												
RF Frequency Cables																
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
				Frank 177080001				Frank 187209001				HPF_7.6GHz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBm	Avg dBm	Pk Lim dBm	Avg Lim dBm	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Middle Channel (5270 MHz)																
10.540	3.0	59.7	47.0	37.1	5.1	-34.4	0.0	0.8	-27.0	-39.6	-7.0	-27.0	-20.0	-12.6	V, Settings: 74 6B	
10.540	3.0	54.5	42.5	37.1	5.1	-34.4	0.0	0.8	-32.1	-44.1	-7.0	-27.0	-25.1	-17.1	H, Settings: 74 6B	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)

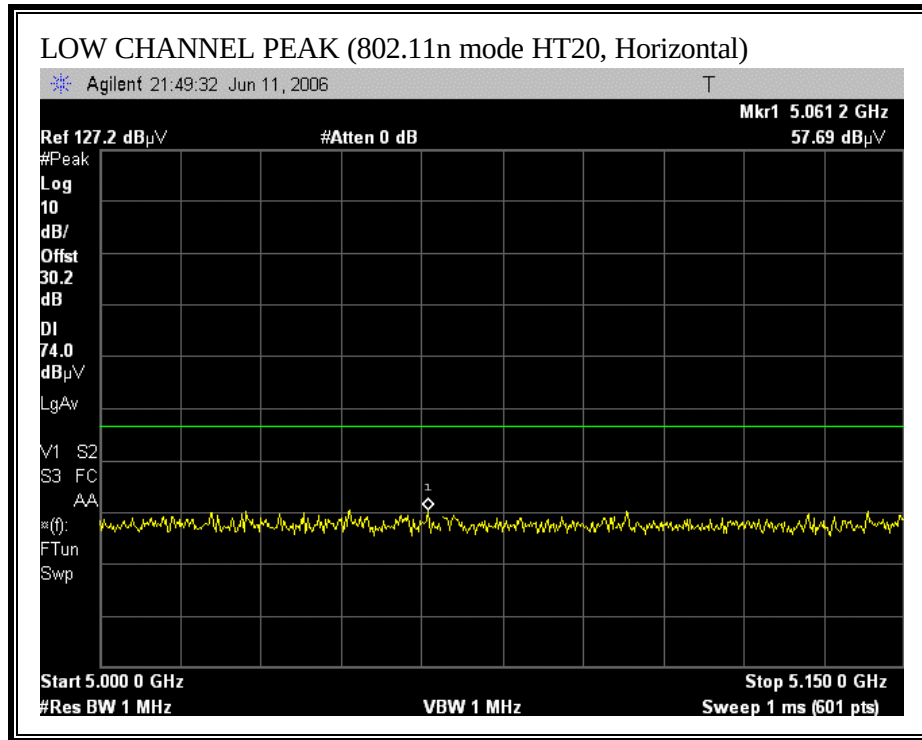


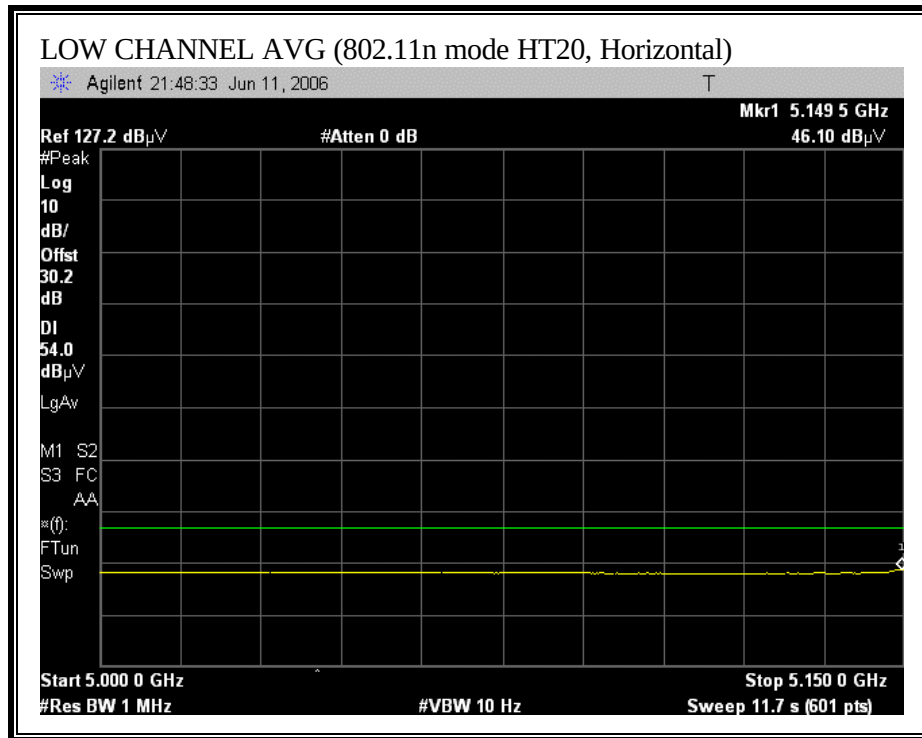


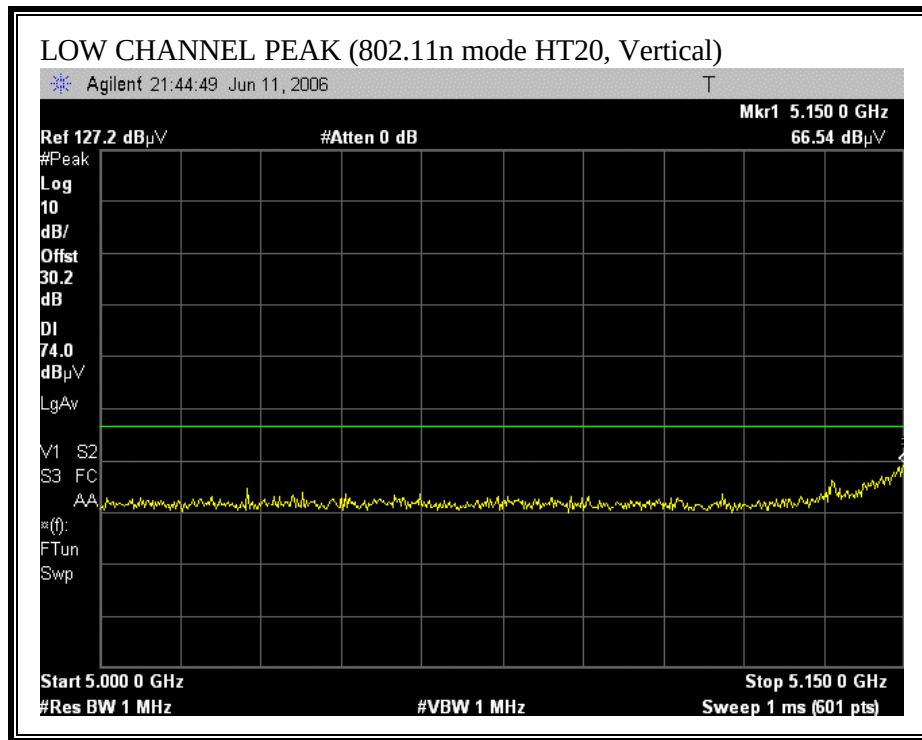


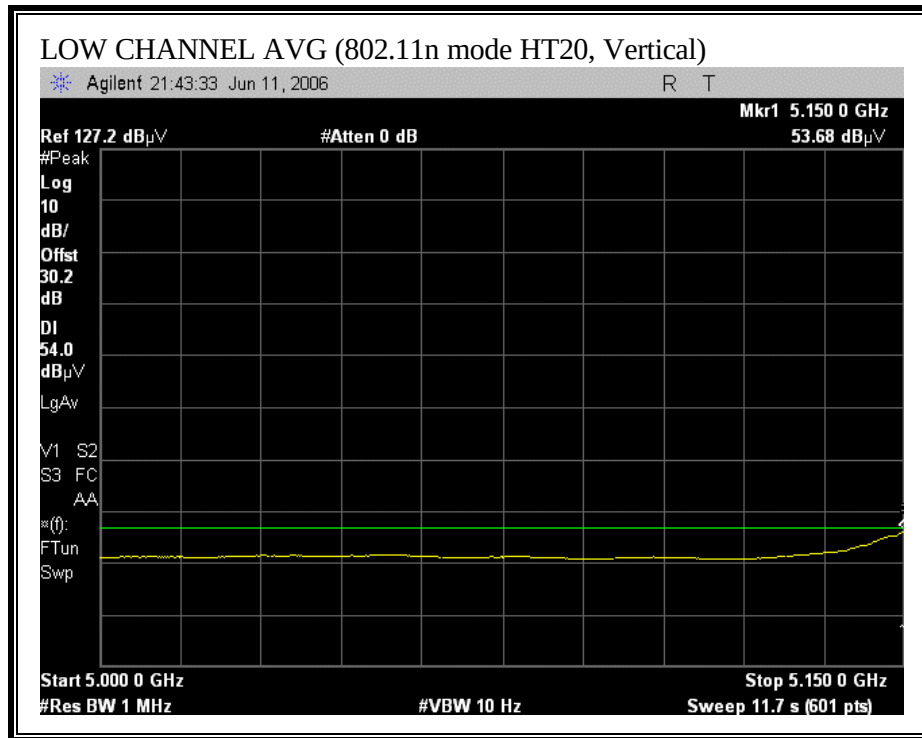


RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)

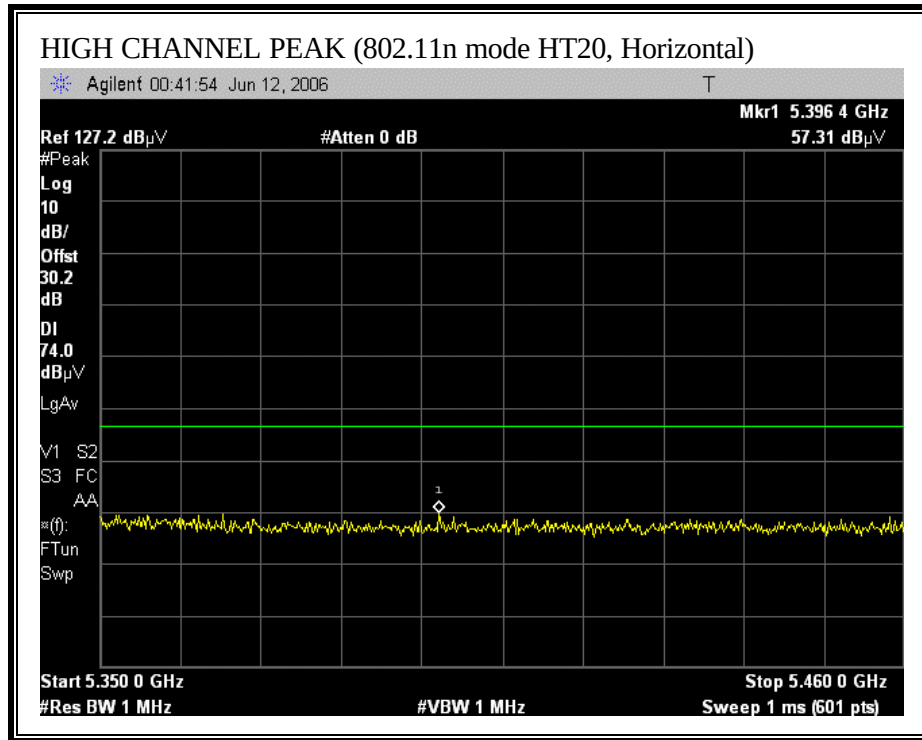

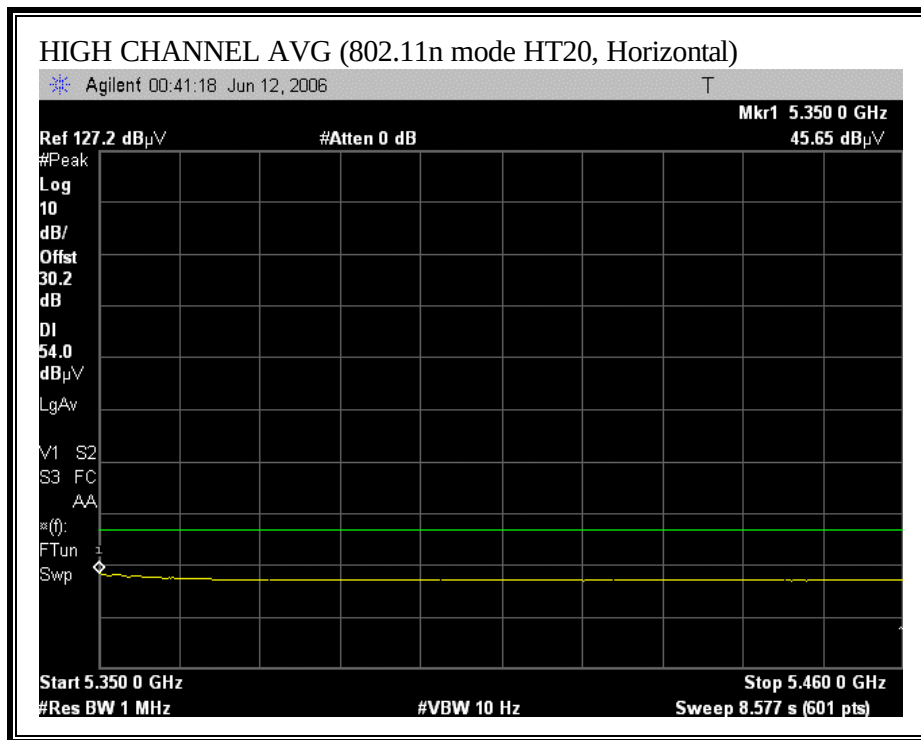

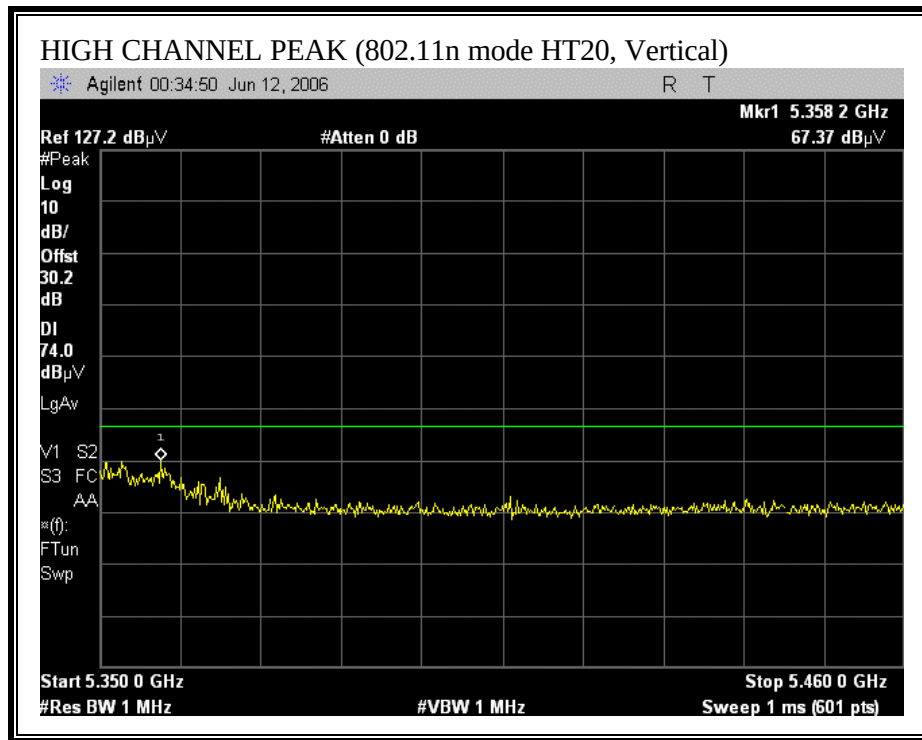

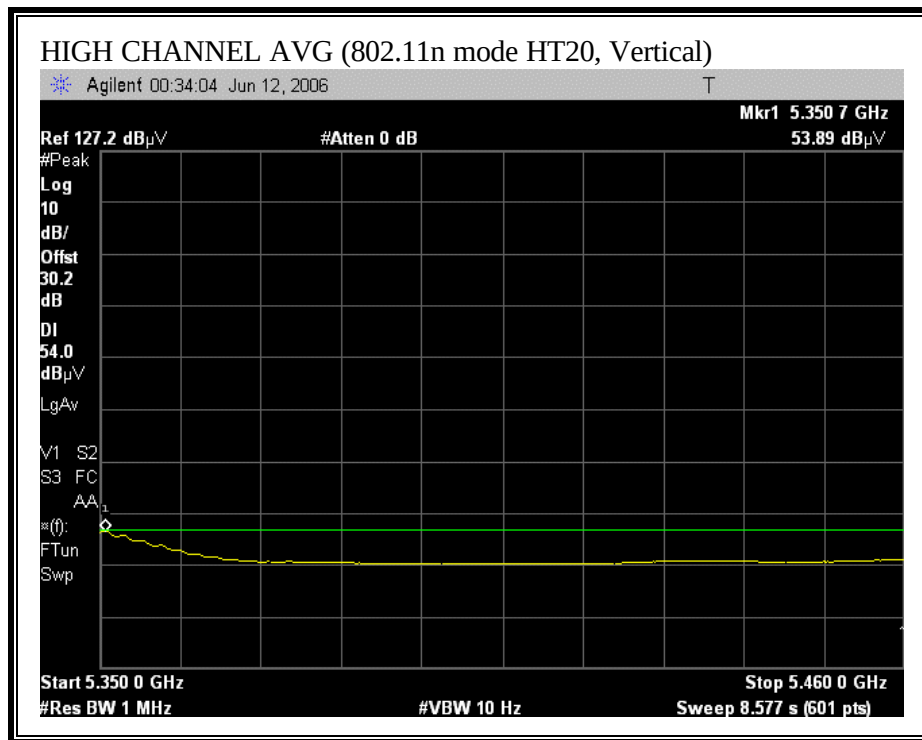


HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/21/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX Duck antennas													
S/N:		099 (Modified EUT)													
Mode:		TX ON in HT mode, 20 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0051								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5180 MHz)															
15.540	3.0	48.0	34.8	38.1	6.2	-32.3	0.0	0.7	60.8	47.5	74	54	-13.2	-6.5	V, Settings: 68 66
15.540	3.0	44.9	31.2	38.1	6.2	-32.3	0.0	0.7	57.7	43.9	74	54	-16.3	-10.1	H, noise floor, Settings: 68 66
Middle Channel (5260 MHz)															
15.780	3.0	49.2	36.8	37.5	6.3	-32.2	0.0	0.7	61.4	49.0	74	54	-12.6	-5.0	V, Settings: 6E 68
15.780	3.0	45.5	31.6	37.5	6.3	-32.2	0.0	0.7	57.7	43.9	74	54	-16.3	-10.1	H, noise floor, Settings: 6E 68
High Channel (5320 MHz)															
10.640	3.0	55.6	42.7	37.1	5.1	-34.2	0.0	0.8	64.3	51.4	74	54	-9.7	-2.6	V, Settings: 64 61
10.640	3.0	48.8	34.9	37.1	5.1	-34.2	0.0	0.8	57.5	43.7	74	54	-16.5	-10.3	H, Settings: 64 61
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit															


EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company:		Marvell														
Project #:		06U10359														
Date:		06/28/06														
Test Engineer:		Frank Ibrahim														
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX Duck antennas														
S/N:		099 (Modified EUT)														
Mode:		TX ON in HT mode, 20 MHz BW														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T73; S/N: 6717 @3m				T145 Agilent 3008A0050												
RF Frequency Cables																
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
				Frank 177080001				Frank 187209001				HPF_7.6GHz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBm	Avg dBm	Pk Lim dBm	Avg Lim dBm	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Middle Channel (5260 MHz)																
10.520	3.0	59.3	46.8	37.1	5.1	-34.4	0.0	0.8	-27.4	-39.9	-7.0	-27.0	-20.4	-12.9	V, Settings: 6E 68	
10.520	3.0	54.4	41.7	37.1	5.1	-34.4	0.0	0.8	-32.3	-44.9	-7.0	-27.0	-25.3	-17.9	H, Settings: 6E 68	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)

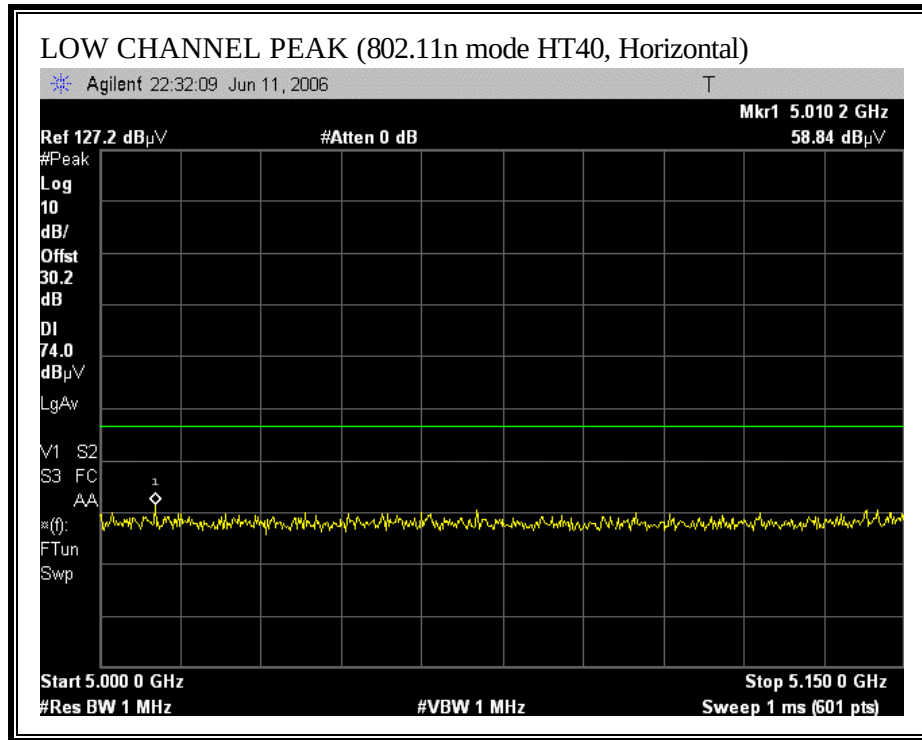


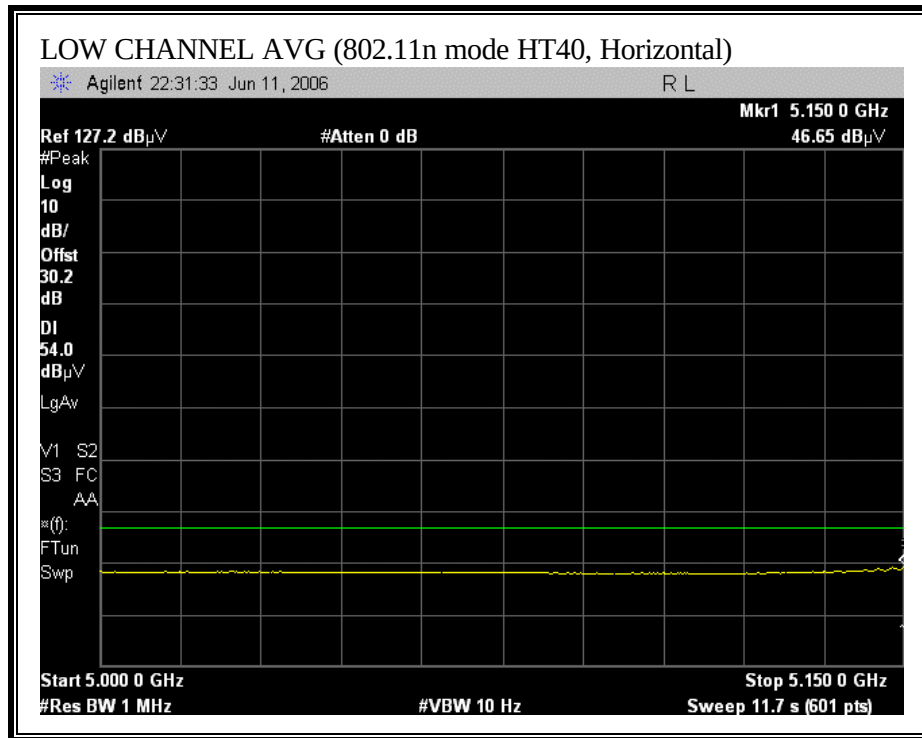


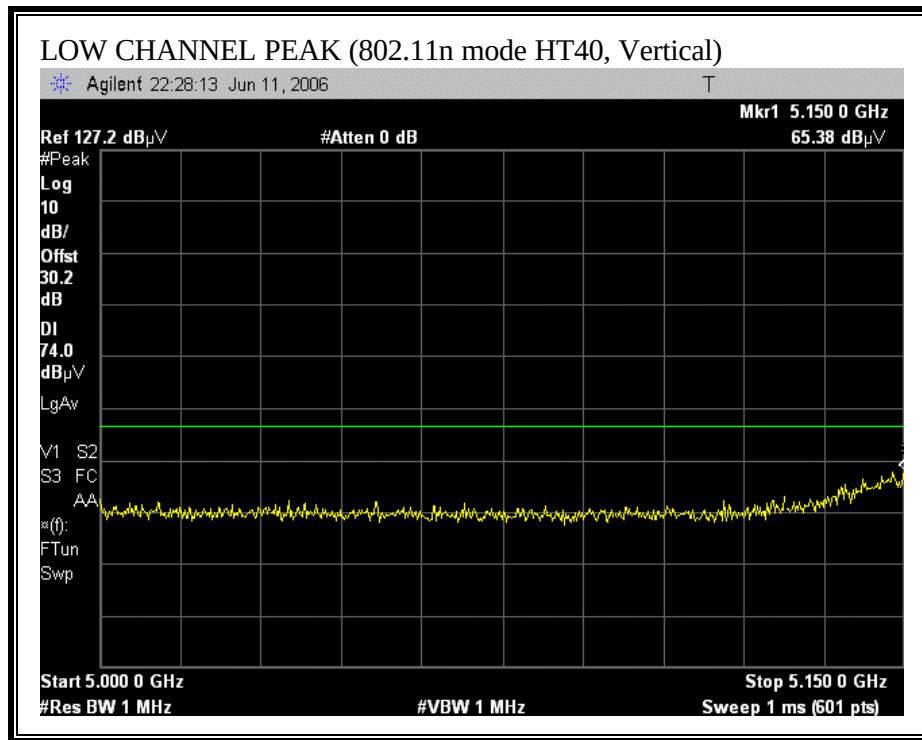


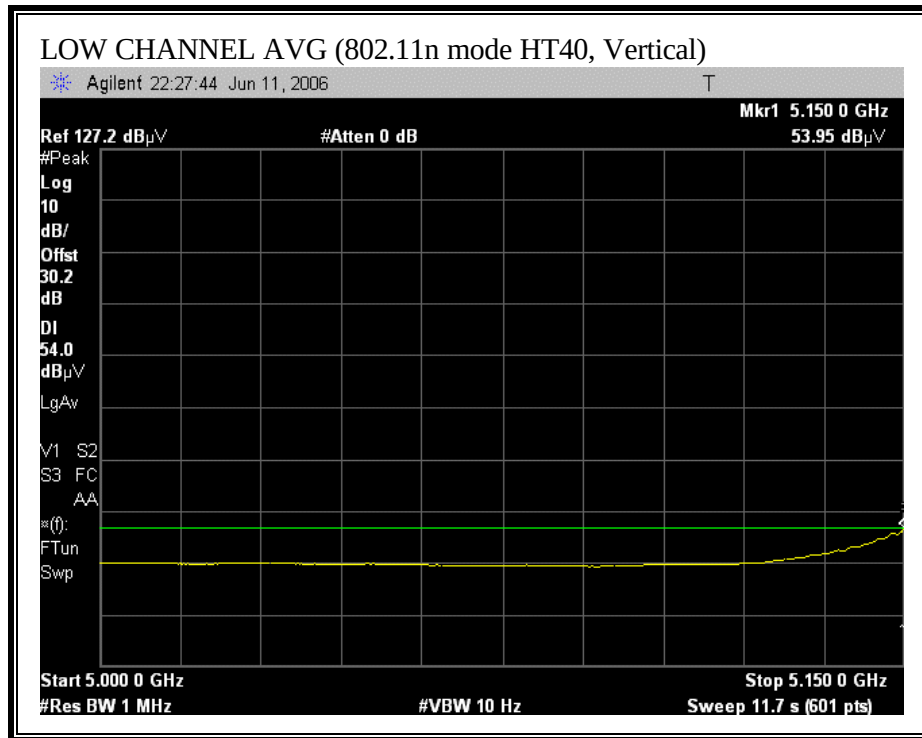


RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)

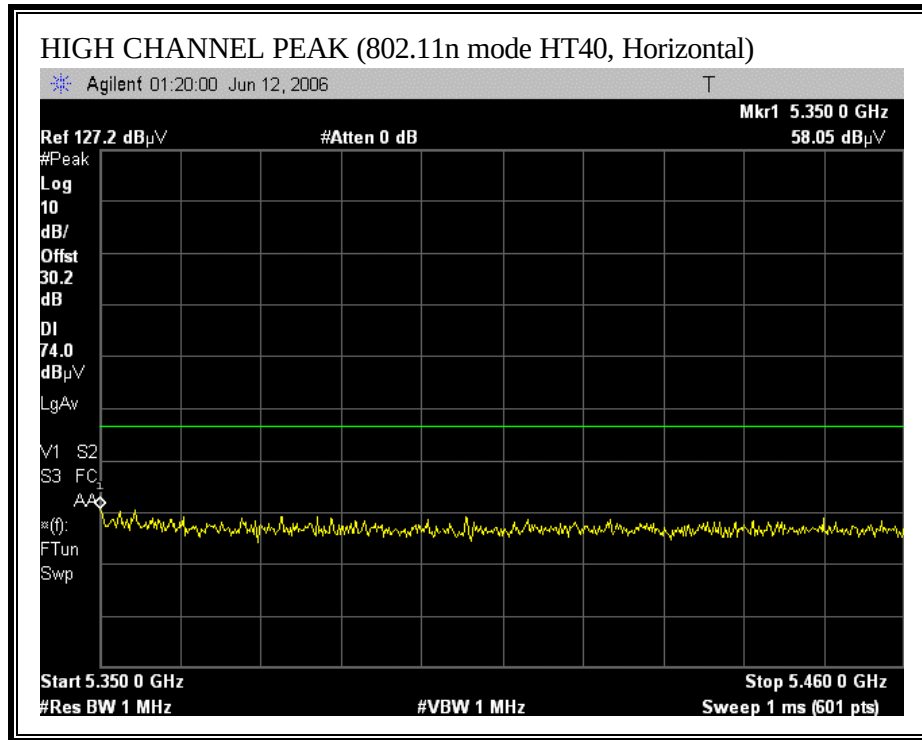

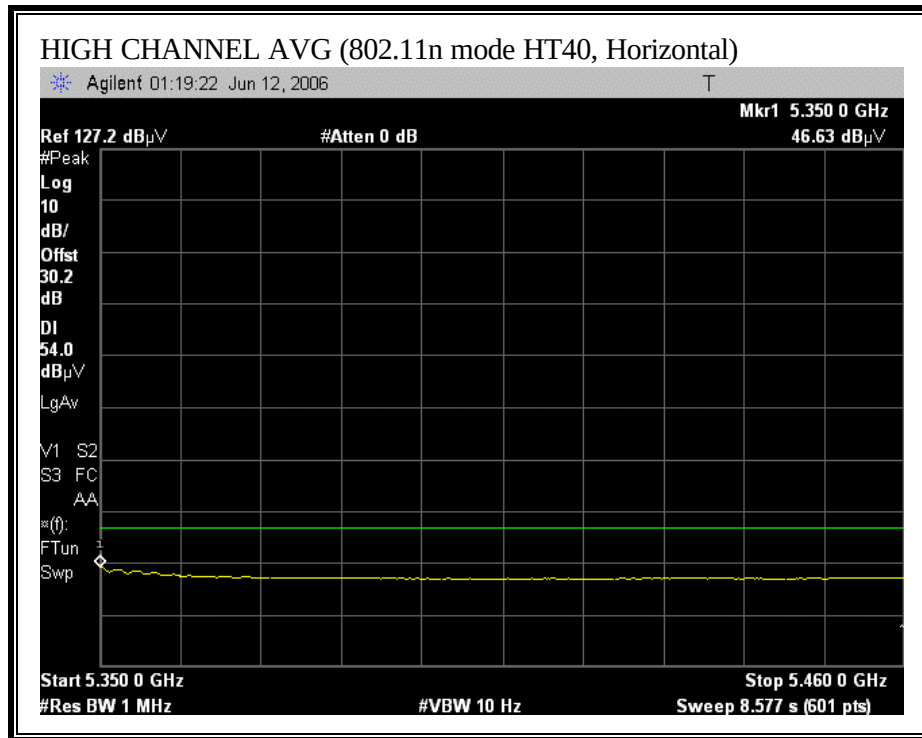

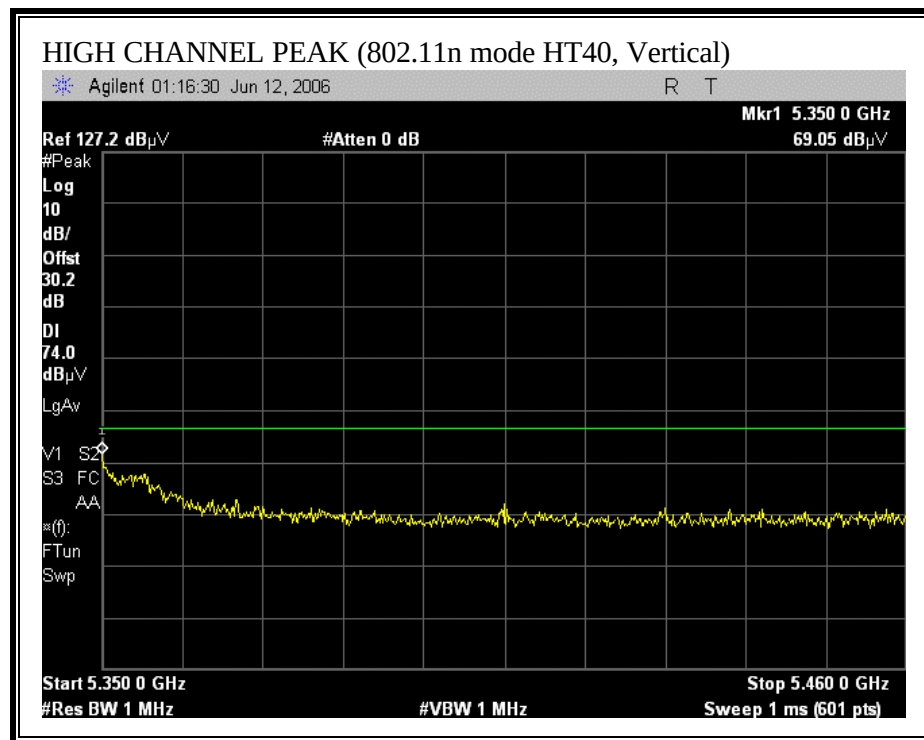

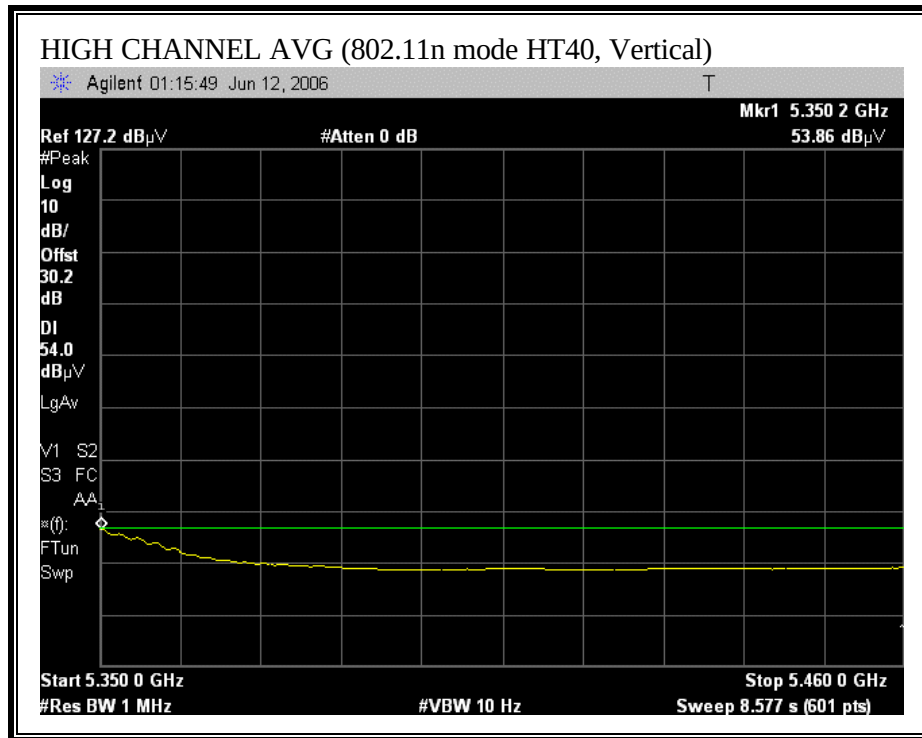

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		Marvell													
Project #:		06U10359													
Date:		06/22/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT connected to Host laptop PC, EUT connected to two TX Duck antennas													
S/N:		099 (Modified EUT)													
Mode:		TX ON in HT mode, 40 MHz BW													
Test Equipment:															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz			
T73; S/N: 6717 @3m				T145 Agilent 3008A0050								T89; ARA 18-26GHz; S/N:1049			
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter	
				Frank 177080001				Frank 187209001				HPF_7.6GHz			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (5190 MHz)															
15.570	3.0	43.9	30.5	38.0	6.2	-32.3	0.0	0.7	56.6	43.2	74	54	-17.4	-10.8	V, Noise Floor, Settings: 62 60
15.570	3.0	43.6	31.0	38.0	6.2	-32.3	0.0	0.7	56.3	43.7	74	54	-17.7	-10.3	H, Noise Floor, Settings: 62 60
Middle Channel (5270 MHz)															
15.810	3.0	46.5	33.9	37.4	6.3	-32.2	0.0	0.7	58.7	46.1	74	54	-15.3	-7.9	V, Settings: 6E 69
15.810	3.0	44.6	30.6	37.4	6.3	-32.2	0.0	0.7	56.8	42.8	74	54	-17.2	-11.2	H, Noise Floor, Settings: 6E 69
High Channel (5310 MHz)															
10.620	3.0	48.7	37.6	37.1	5.1	-34.3	0.0	0.8	57.4	46.3	74	54	-16.6	-7.7	V, Settings: 60 5D
10.620	3.0	46.3	33.1	37.1	5.1	-34.3	0.0	0.8	55.0	41.8	74	54	-19.0	-12.2	H, Settings: 60 5D
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit															

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 7 File#: new.EMI Date: 06-22-2006 Time: 19:22:48
Audix ATC

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Thanh Nguyen
Company: : Marvell Semiconductor
Project #: : 06U10359
Model: : MC85
Configuration: : EUT, Extender card, Laptop .
Mode of Operation: Tx Worst case

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	90.140	21.21	8.79	30.00	43.50	-13.50	Peak
2	135.730	20.64	14.96	35.60	43.50	-7.90	Peak
3	324.880	16.93	16.28	33.21	46.00	-12.79	Peak
4	509.180	15.75	20.36	36.11	46.00	-9.89	Peak
5	727.430	12.38	23.53	35.91	46.00	-10.09	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 5 File#: new.EMI Date: 06-22-2006 Time: 18:52:34
Audix ATC

Condition: FCC CLASS-B VERTICAL
Test Operator: : Thanh Nguyen
Company: : Marvell Semiconductor
Project #: : 06U10359
Model: : MC85
Configuration: : EUT, Extender card, Laptop .
Mode of Operation: Tx Worst case

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	167.740	17.00	13.51	30.51	43.50	-12.99	Peak
2	221.090	17.62	12.67	30.29	46.00	-15.71	Peak
3	269.590	16.54	14.61	31.15	46.00	-14.85	Peak
4	340.400	15.22	16.64	31.86	46.00	-14.14	Peak
5	470.380	12.87	19.65	32.52	46.00	-13.48	Peak

7.3. FREQUENCY STABILITY

LIMIT

§15.407 (g) Manufacturers of UNII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation as specified in the user manual.

TEST PROCEDURE

Frequency stability versus environmental temperature

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

Frequency Stability versus Input Voltage

At room temperature ($25\pm 5^{\circ}\text{C}$), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

RESULTS

Reference Frequency at 20 deg C and 115 VAC

Supply Voltage (VAC)	Temperature (deg C)	Frequency (MHz)	Delta (kHz)	Delta (ppm)
115.00	20	5259.9912	Reference	Reference
115.00	-30	5260.0437	-52.500	-9.981
115.00	50	5259.9924	-1.200	-0.228
97.75	20	5259.9920	-0.800	-0.152
132.25	20	5259.9912	0.000	0.000

7.4. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.20	52.04	--	40.35	0.00	63.53	53.53	-11.49	-13.18	L1
0.54	36.96	--	27.80	0.00	56.00	46.00	-19.04	-18.20	L1
3.53	34.56	--	--	0.00	56.00	46.00	-21.44	-11.44	L1
0.20	48.92	--	37.32	0.00	63.57	53.57	-14.65	-16.25	L2
0.55	34.64	--	27.67	0.00	56.00	46.00	-21.36	-18.33	L2
5.14	36.28	--	--	0.00	60.00	50.00	-23.72	-13.72	L2
6 Worst Data									

LINE 1 RESULTS

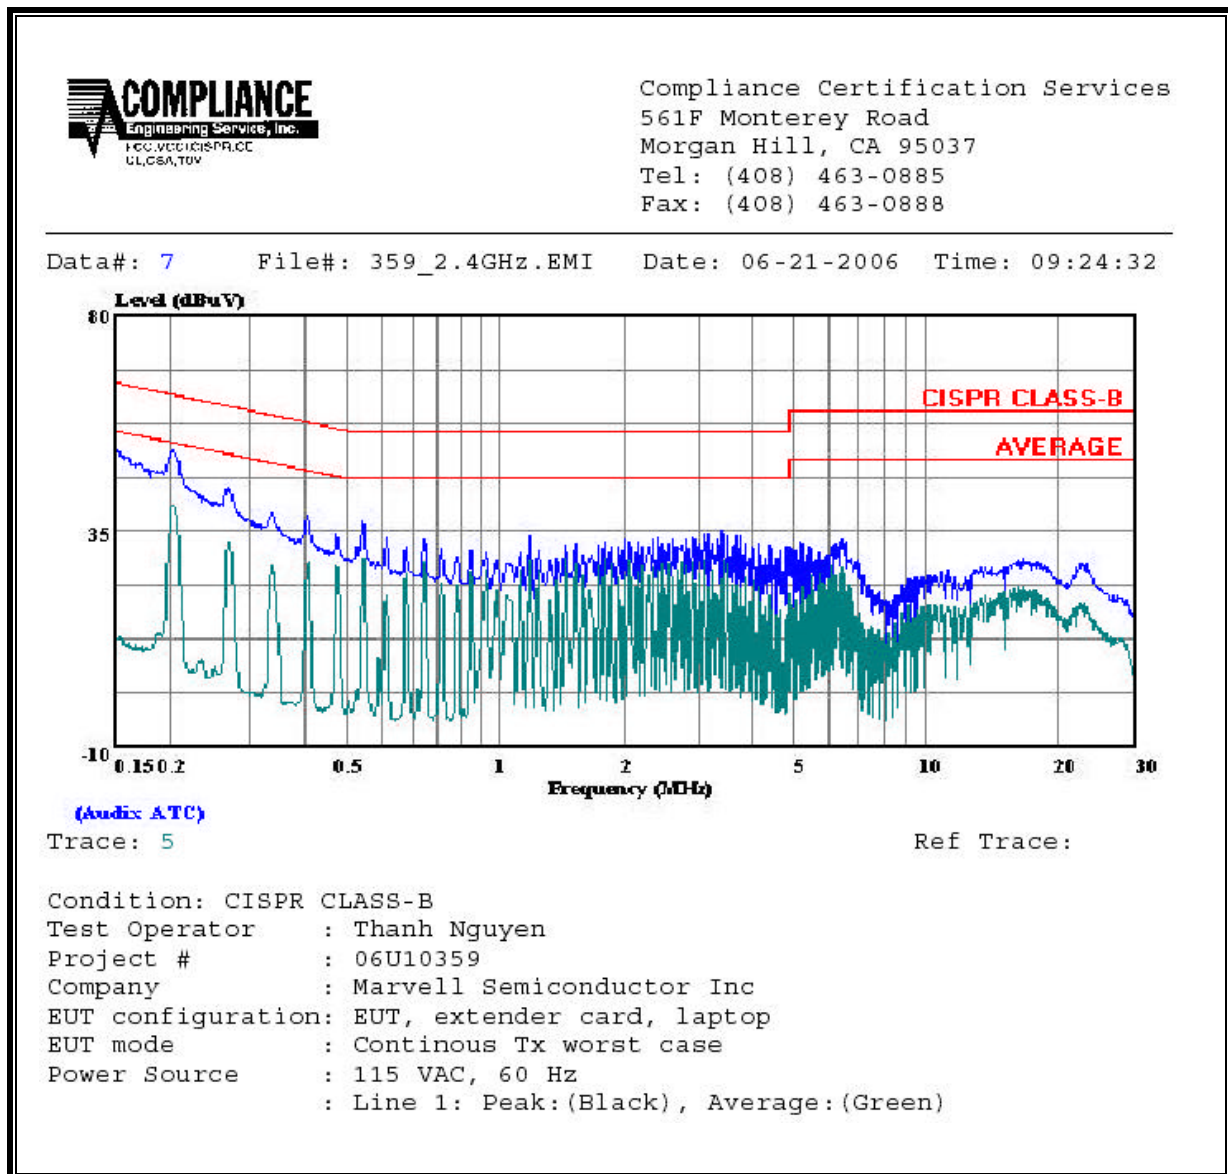

LINE 2 RESULTS

