



**FCC CFR47 PART 15 SUBPART C
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

MC85 MINI CARD 11b/g/a/n RADIO CARD

MODEL NUMBER: MC85P

FCC ID: UAY-MMC85PA

REPORT NUMBER: 06U10412-1

ISSUE DATE: JULY 24, 2006

Prepared for
**MARVELL SEMICONDUCTOR, INC.
5488 MARVELL LANE
SANTA CLARA
CALIFORNIA, 95054, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	7/24/2006	Initial Issue	A. Ilarina

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION	6
5.3. MAXIMUM OUTPUT POWER	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.5. SOFTWARE AND FIRMWARE	7
5.6. WORST-CASE CONFIGURATION AND MODE.....	7
5.7. MODIFICATIONS.....	7
5.8. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1.1. AVERAGE POWER.....	11
7.1.2. MAXIMUM PERMISSIBLE EXPOSURE.....	13
7.1.3. AVERAGE POWER.....	16
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	18
7.2. RADIATED EMISSIONS.....	21
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	21
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	24
7.2.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND	69
7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	73
7.3. POWERLINE CONDUCTED EMISSIONS	77
8. SETUP PHOTOS.....	80

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MARVELL SEMICONDUCTOR, INC.
5488 MARVELL LANE
SANTA CLARA, CA, 95054, USA

EUT DESCRIPTION: MC85 MINI CARD 11b/g/a/n RADIO CARD

MODEL: MC85P

SERIAL NUMBER: 010

DATE TESTED: JULY 3 – JULY 18, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



ALVIN ILARINA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



FRANK IBRAHIM
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n transceiver.

The radio module is manufactured by Marvell Semiconductor.

5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION

Change #1 Adding Laptop PIFA Antenna

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
--------------------------	------	-----------------------	----------------------

2400 to 2483.5 MHz Authorized Band

2412 - 2462	802.11b	25.50	354.81
2412 - 2462	802.11g 20M	27.29	535.80
2412 - 2462	802.11g 40M	23.65	231.74
2412 - 2462	802.11n HT20	26.55	451.86
2422 - 2452	802.11n HT40	24.92	310.46

5725 to 5850 MHz Authorized Band

5745 - 5825	802.11a 20MHz	27.21	526.02
5755 - 5795	802.11a 40MHz	24.58	287.08
5745 - 5825	802.11n HT20	27.12	515.23
5755 - 5795	802.11n HT40	26.60	457.09

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes the following antenna:

1) PIFA manufactured by Apple, maximum gain of -1.6 dBi in the 2.4 GHz band, and 4.06 dBi in the 5.0 GHz band.

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was PCI rev. 1.0.0.0.2, MFG 2.1.0.36

The EUT driver software installed in the Laptop during testing was Marvell Semiconductor, Inc. Labtools rev. 1.0.3.p3.

The board revision of the EUT tested is 1.8.

The test utility software used during testing was PCI.exe.

5.6. WORST-CASE CONFIGURATION AND MODE

The 2x3 configuration was used for all testing in this report.

The worst- case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates for the 2GHz bands are: 11 Mbps for 802.11b; 54Mbps for 802.11g; MCS11 for 802.11n HT20; MCS15 for 802.11n HT40. These are based on baseline testing with this chipset.

The worst-case data rates for the 5GHz bands are: 9 Mbps for 802.11a 20MHz and 802.11a 40MHz; MCS0 for 802.11n HT20 and 802.11n HT40. These are based on baseline testing with this chipset.

All emissions tests were made with the worst-case data rates.

5.7. MODIFICATIONS

There were no modifications made to the revision EUT during the testing.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Apple	A1151	CS01768	DoC
Power Adapter	Apple	A1172	052765-11	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.8m	N/A
2	DC	A	DC	Unshielded	1.8m	N/A

TEST SETUP

The EUT is installed inside a host laptop computer. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

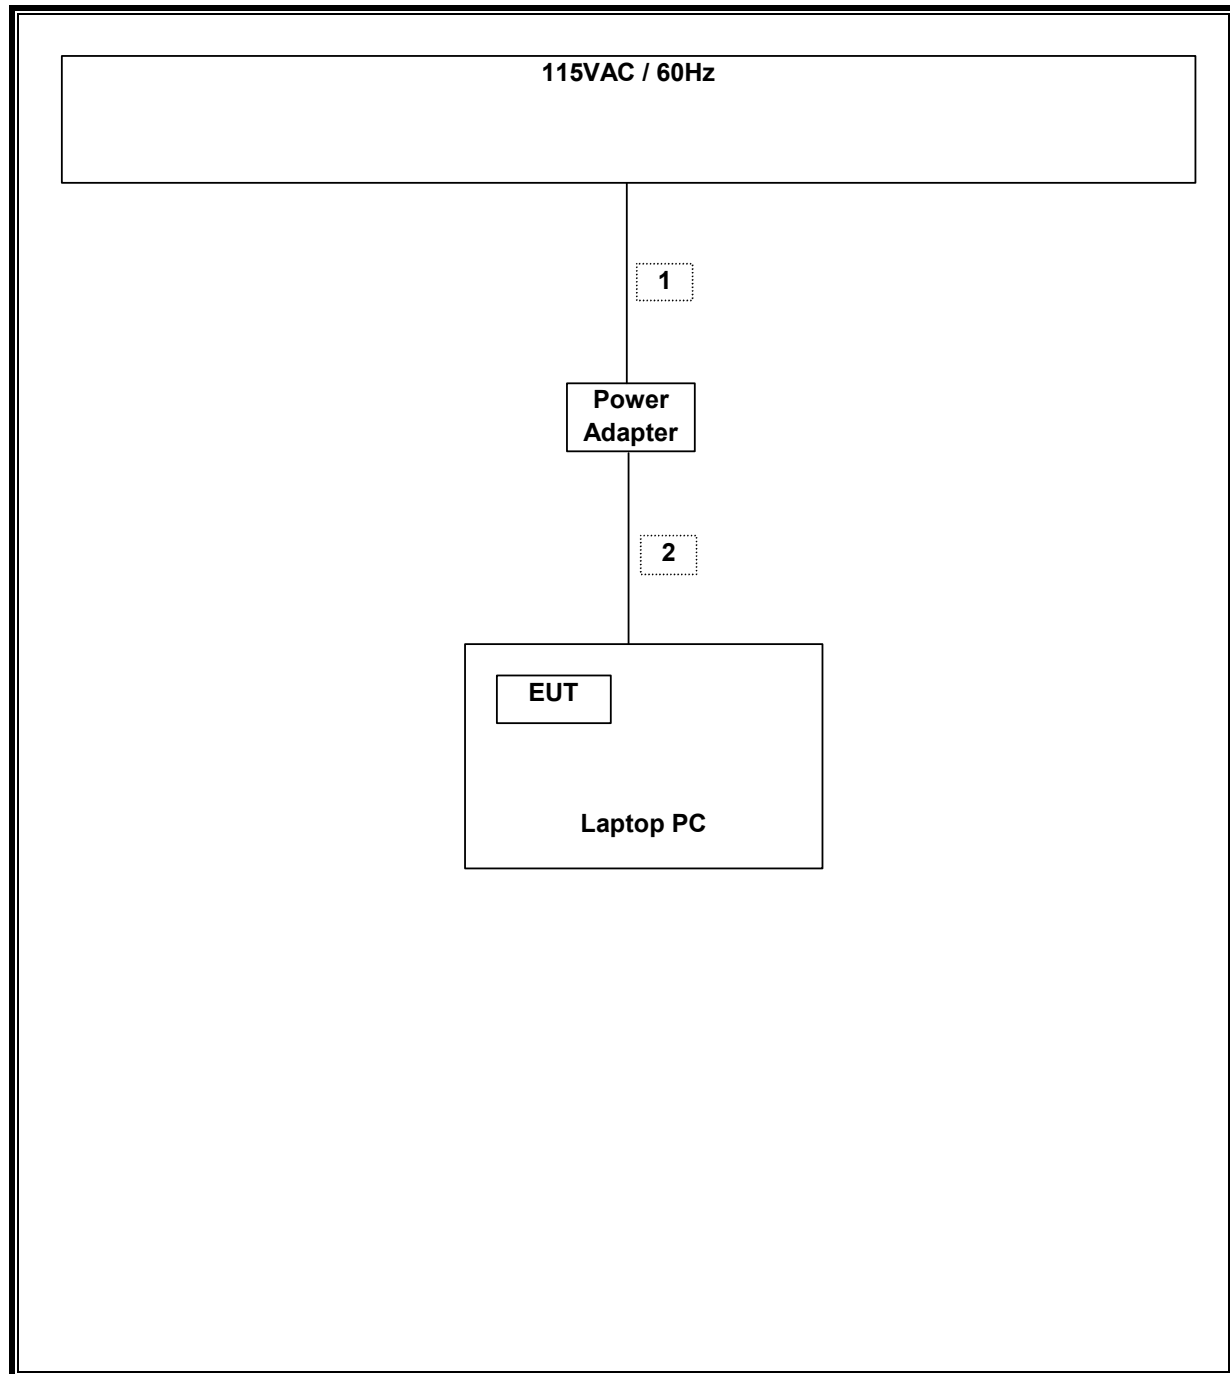

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2007
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/2007
Antenna, Bilog 30 MHz ~ 2 GHz	Sunol Sciences	JB1	A121003	9/3/2006
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/2/2007
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/2/2007
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	4/22/2007
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	9/12/2006
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-SP	924342	9/2/2006
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	4/13/2007
Preamplifier, 26 ~ 40 GHz	Miteq	NSP4000-SP2	924343	8/18/2006
5.15-5.35 GHz Reject Filter	Micro-Tronics	BRC13190	1	CNR
5.725-5.825 GHz Reject Filter	Micro-Tronics	BRC13192	1	CNR
4.0 High Pass Filter	Micro Tronics	HPM13351	3	CNR
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY45300064	12/19/2006

7. LIMITS AND RESULTS

7.1.1. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{(Chain 0 Power / 10)}} + 10^{\text{(Chain 2 Power / 10)}})$

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain A (dBm)	Average Power Chain B (dBm)	Average Power Total (dBm)
-----------------	--------------------	-----------------------------------	-----------------------------------	---------------------------------

802.11b Mode

Low	2412	18.2	17.6	20.9
Middle	2437	18.4	18.0	21.2
High	2462	18.5	18.0	21.3

802.11g 20MHz Mode

Low	2412	15.3	15.4	18.4
Middle	2437	17.5	17.4	20.5
High	2462	16.4	15.2	18.9

802.11g 40MHz Mode

Low	2422	12.5	12.6	15.6
Middle	2437	12.4	11.7	15.1
High	2452	11.6	10.5	14.1

802.11n HT20 Mode

Low	2412	14.8	14.9	17.9
Middle	2437	16.9	16.9	19.9
High	2462	14.1	13.7	16.9

802.11n HT40 Mode

Low	2422	13.9	14.0	17.0
Middle	2437	12.1	12.6	15.3
High	2452	12.4	12.1	15.3

7.1.2. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

Band (MHz)	Power Density Limit (mW/cm²)	Total Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
2400 to 2483.5	1.0	27.29	-1.60	5.43

7.1.3. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{(Chain 0 Power / 10)}} + 10^{\text{(Chain 2 Power / 10)}})$

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.8 dB (including 10 dB pad and 1.8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain A (dBm)	Average Power Chain B (dBm)	Average Power Total (dBm)
-------------------------	----------------------------	--	--	--

802.11a 20M Mode

Low	5745	16.9	17.1	20.0
Middle	5785	16.8	17.0	19.9
High	5825	16.9	17.0	20.0

802.11a 40M Mode

Low	5755	12.5	12.6	15.6
High	5795	15.0	15.0	18.0

802.11n HT20 Mode

Low	5745	16.9	17.0	20.0
Middle	5785	16.9	16.9	19.9
High	5825	16.8	16.9	19.8

802.11n HT40 Mode

Low	5755	14.3	14.4	17.4
High	5795	17.0	16.9	19.9

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

Band (MHz)	Power Density Limit (mW/cm²)	Total Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
5725 to 5850	1.0	27.21	4.40	10.73

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

RESTRICTED BANDEDGE (802.11b MODE, LOW CHANNEL)

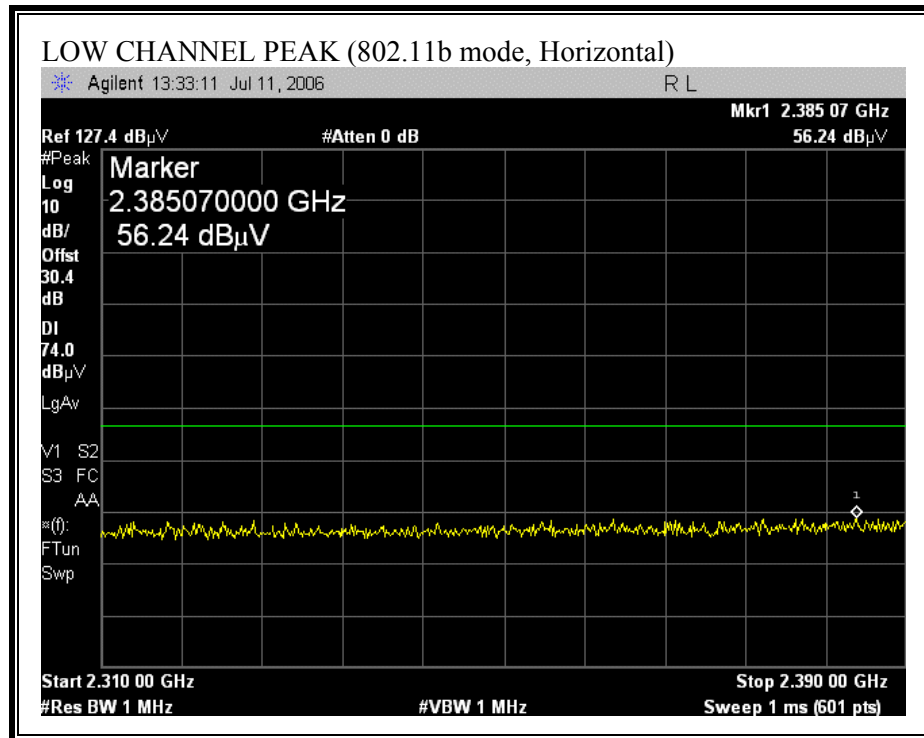


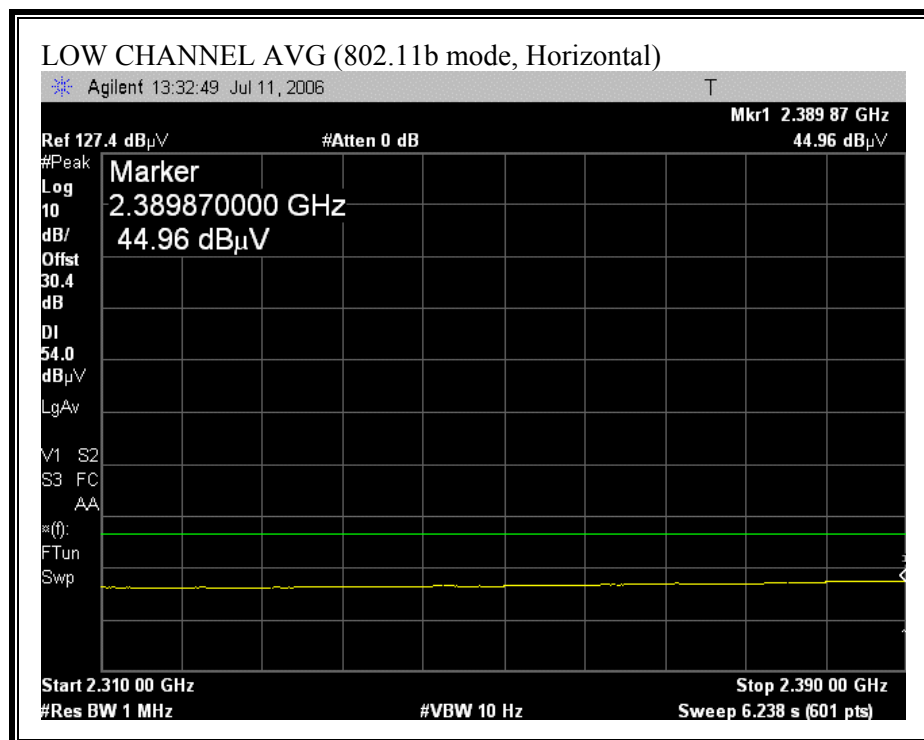


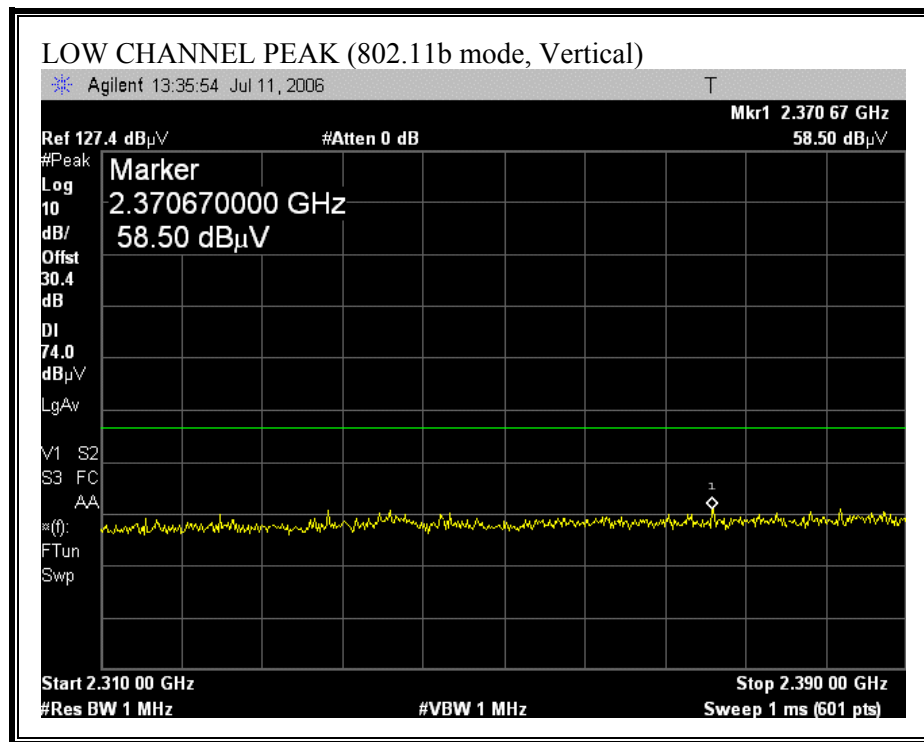


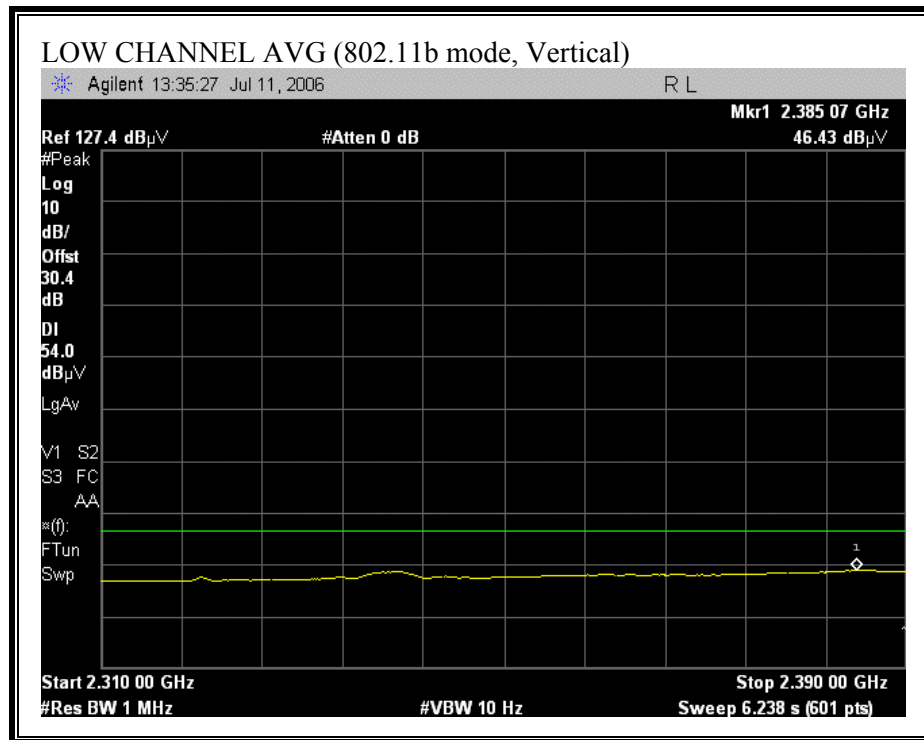


RESTRICTED BANDEDGE (802.11b MODE, HIGH CHANNEL)

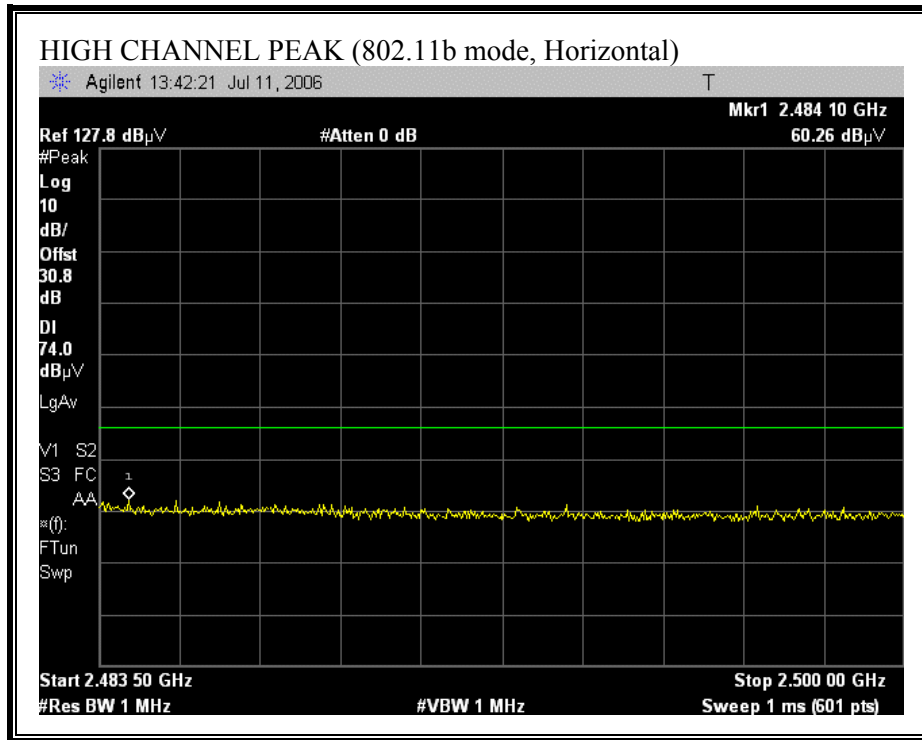

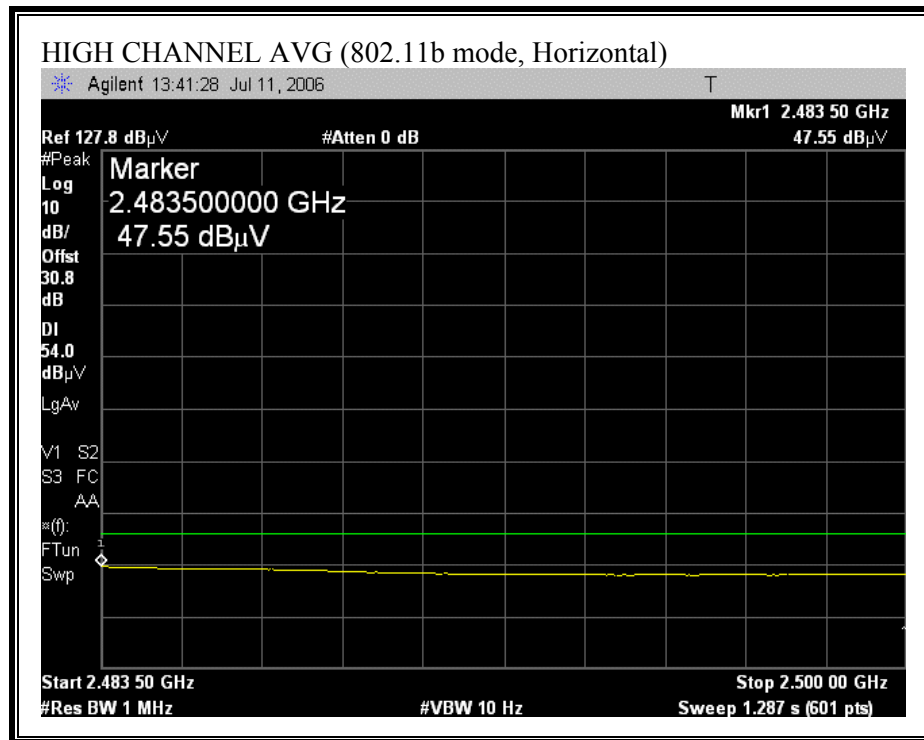

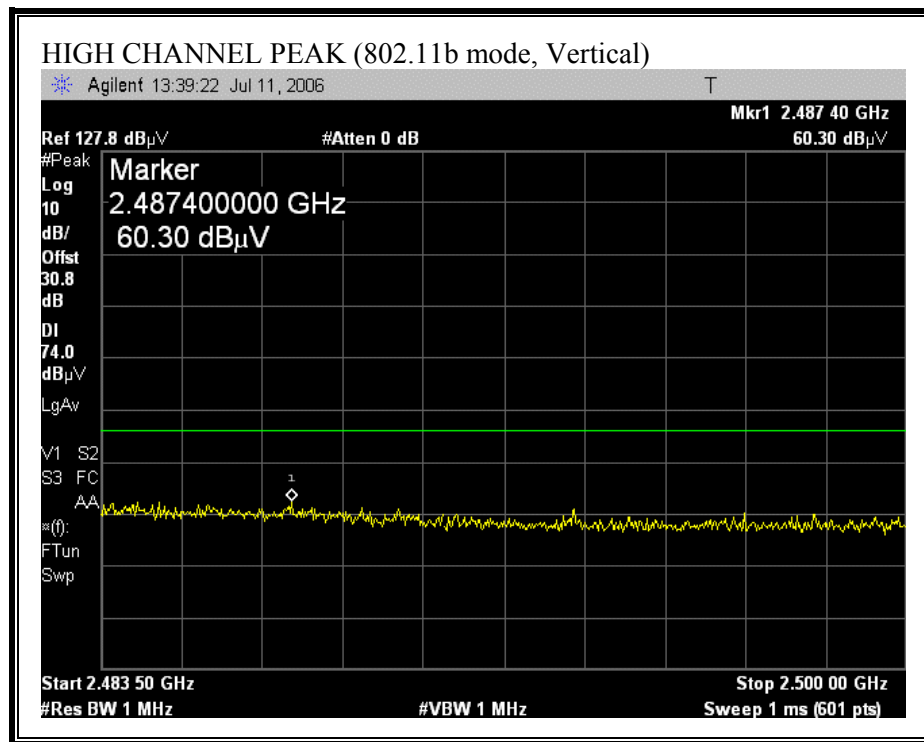

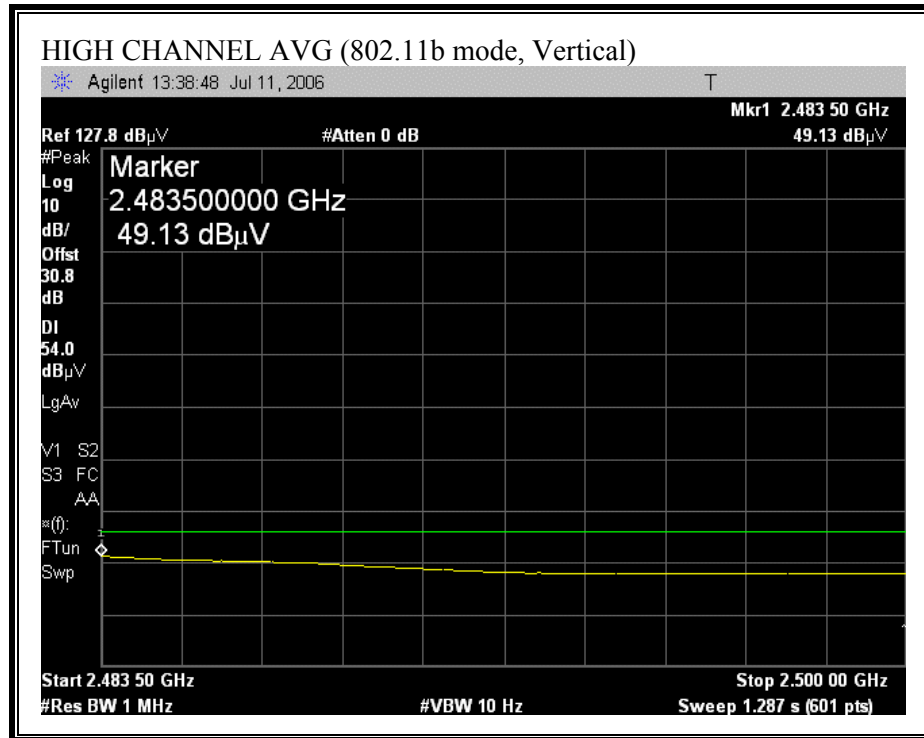



HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)


High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		MARVELL SEMICONDUCTOR INC.																	
Project #:		06U10412																	
Date:		07/14/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC																	
Mode:		Continuously Transmitting in 11b 20M mode, 11Mbps																	
EUT S/N:		010																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049							
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001								R_001			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (2412 MHz)																			
4.824	3.0	52.88	39.20	33.0	4.0	-45.3	0.0	0.0	44.6	30.9	74	54	-29.4	-23.1	V, PowerSetting 5F 5F				
4.824	3.0	52.76	39.60	33.0	4.0	-45.3	0.0	0.0	44.4	31.3	74	54	-29.6	-22.7	H, PowerSetting 5F 5F				
Mid Channel (2437 MHz)																			
4.874	3.0	60.18	48.47	33.1	4.0	-45.3	0.0	0.0	51.9	40.2	74	54	-22.1	-13.8	V, PowerSetting 5F 5F				
7.311	3.0	57.06	43.37	35.5	4.6	-43.2	0.0	0.0	53.9	40.2	74	54	-20.1	-13.8	V, PowerSetting 5F 5F				
4.874	3.0	55.60	42.80	33.1	4.0	-45.3	0.0	0.0	47.3	34.5	74	54	-26.7	-19.5	H, PowerSetting 5F 5F				
7.311	3.0	51.20	39.10	35.5	4.6	-43.2	0.0	0.0	48.1	36.0	74	54	-25.9	-18.0	H, PowerSetting 5F 5F				
High Channel (2462 MHz)																			
4.924	3.0	58.50	45.57	33.1	4.0	-45.4	0.0	0.0	50.3	37.3	74	54	-23.7	-16.7	V, PowerSetting 5F 5D				
7.386	3.0	52.18	41.50	35.6	4.6	-43.1	0.0	0.0	49.3	38.6	74	54	-24.7	-15.4	V, PowerSetting 5F 5D				
4.924	3.0	52.65	40.10	33.1	4.0	-45.4	0.0	0.0	44.4	31.9	74	54	-29.6	-22.1	H, PowerSetting 5F 5D				
7.386	3.0	51.62	39.50	35.6	4.6	-43.1	0.0	0.0	48.7	36.6	74	54	-25.3	-17.4	H, PowerSetting 5F 5D				
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

RESTRICTED BANDEDGE (802.11g 20M MODE, LOW CHANNEL)

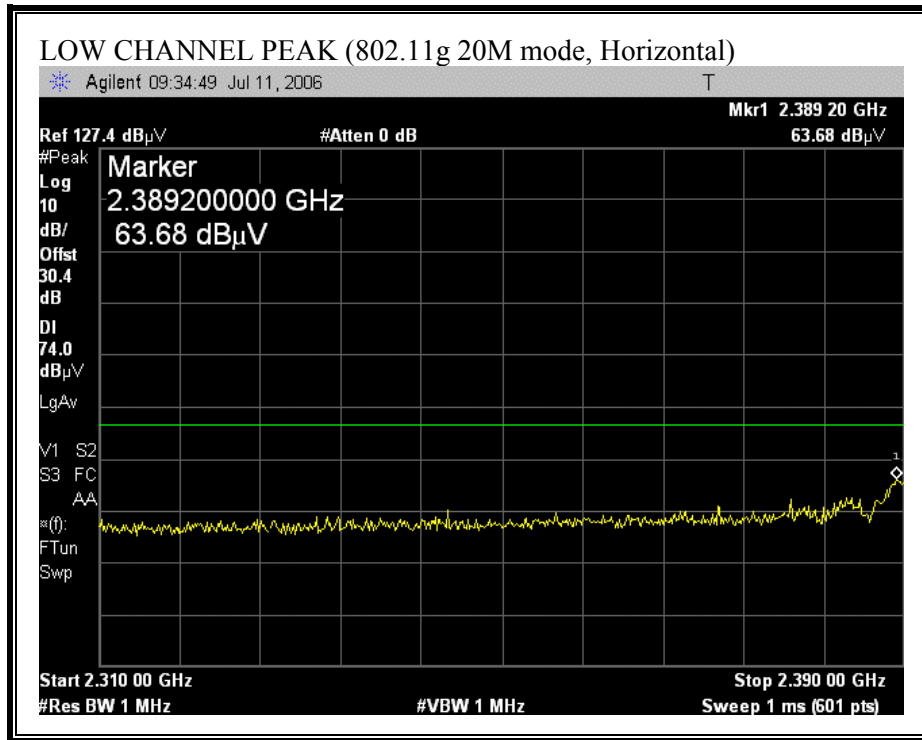


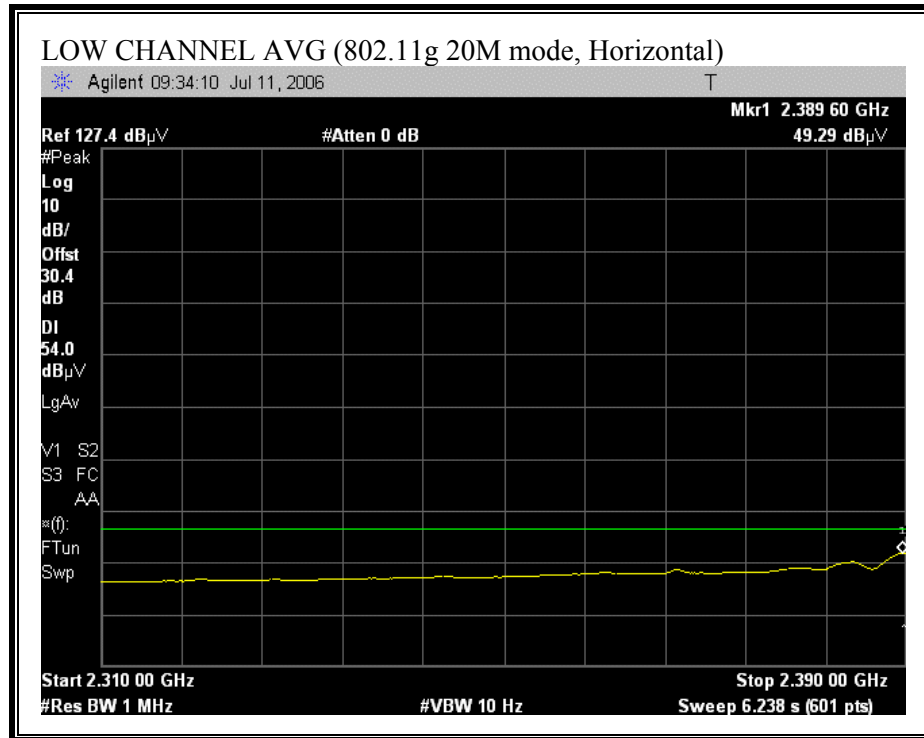


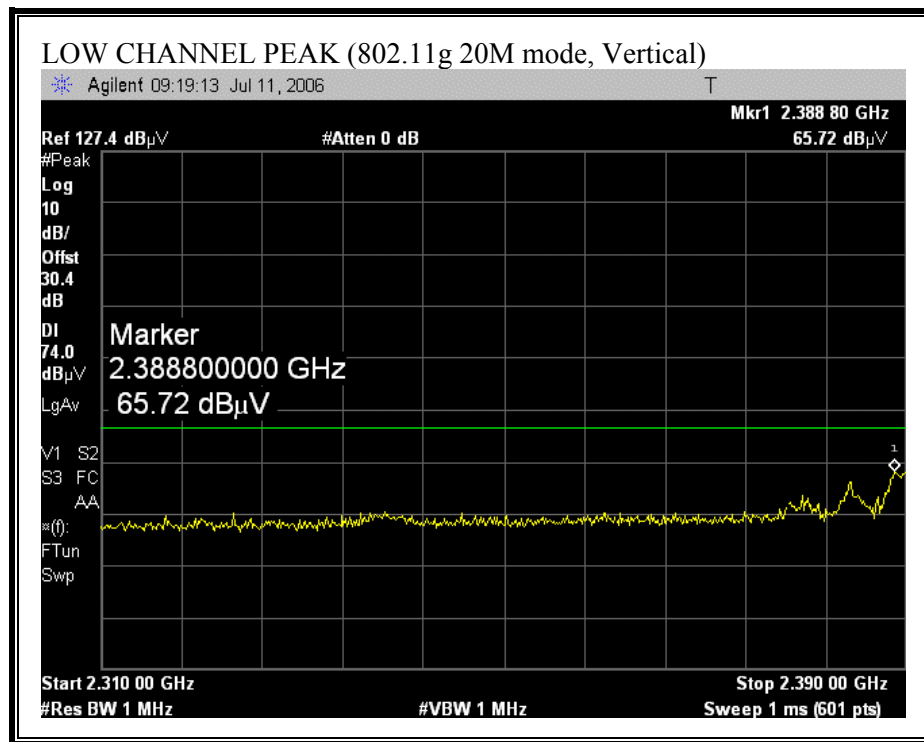


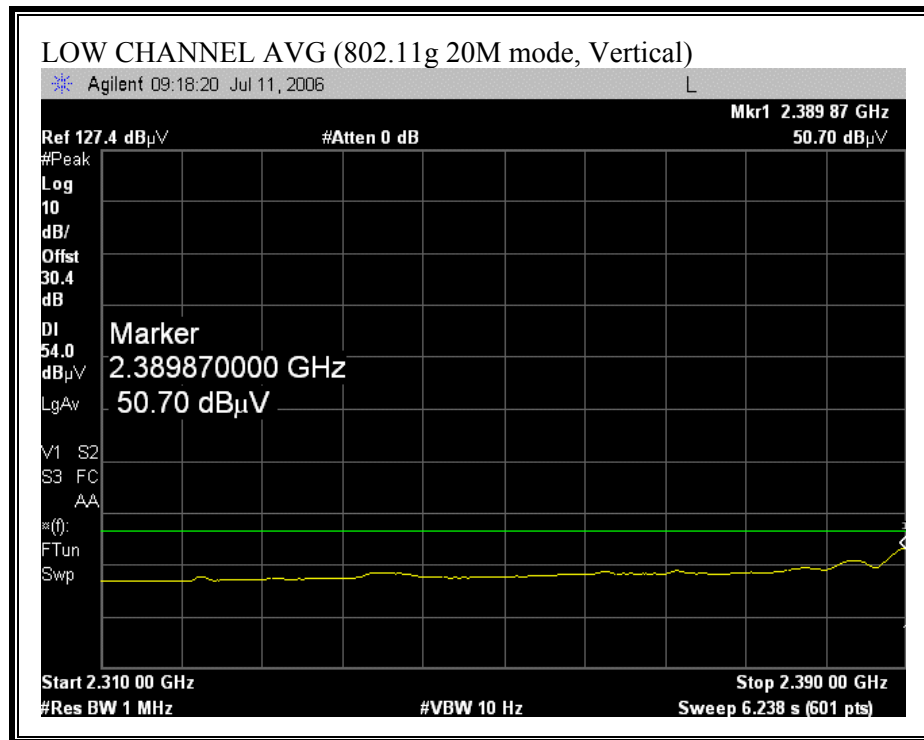


RESTRICTED BANDEDGE (802.11g 20M MODE, HIGH CHANNEL)

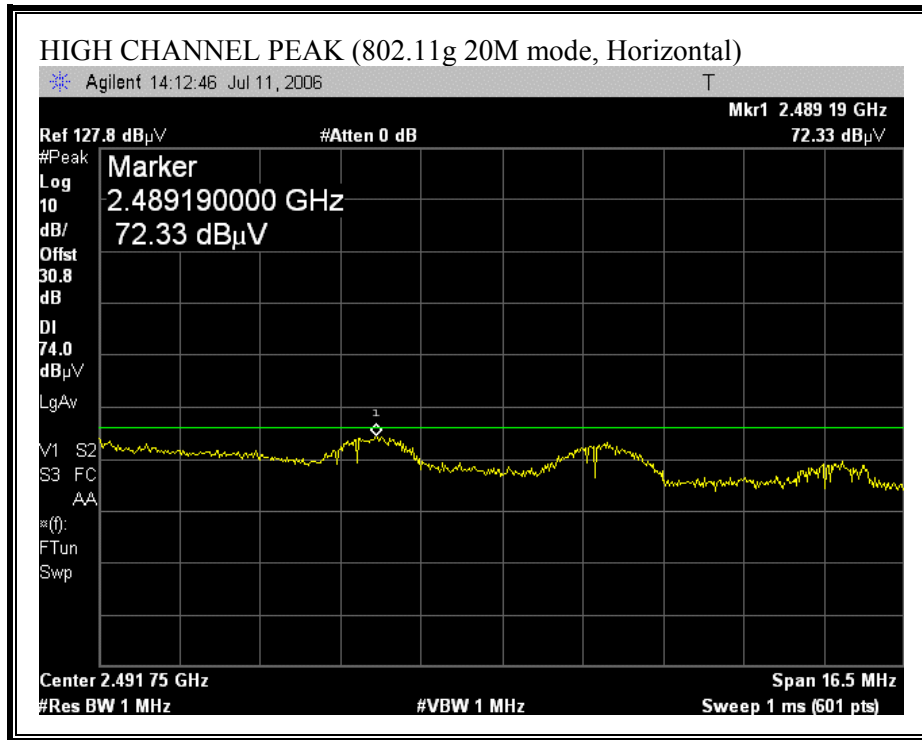

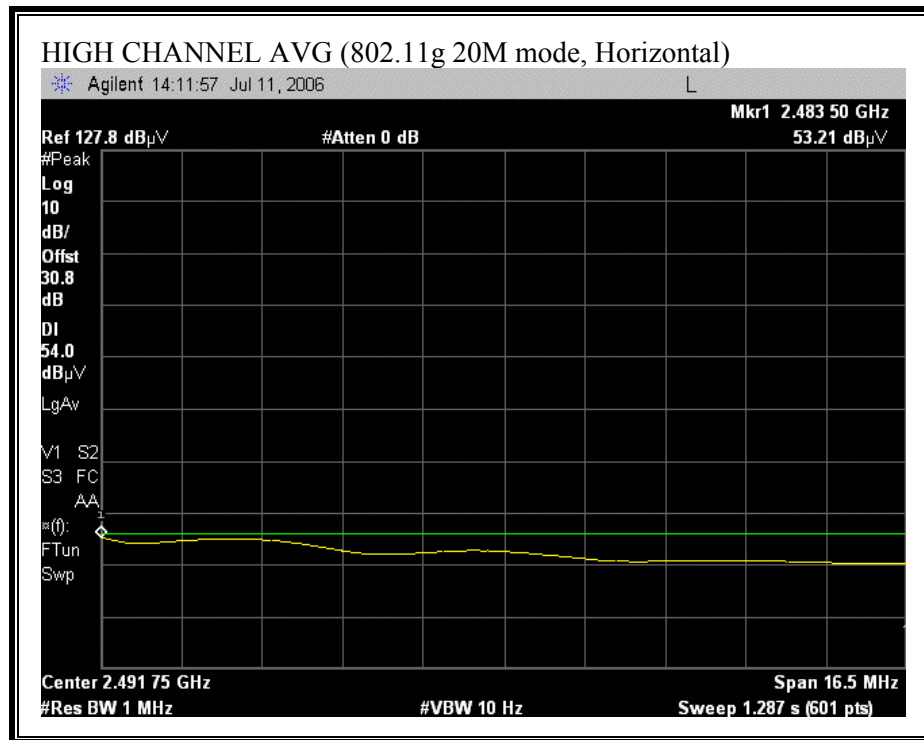

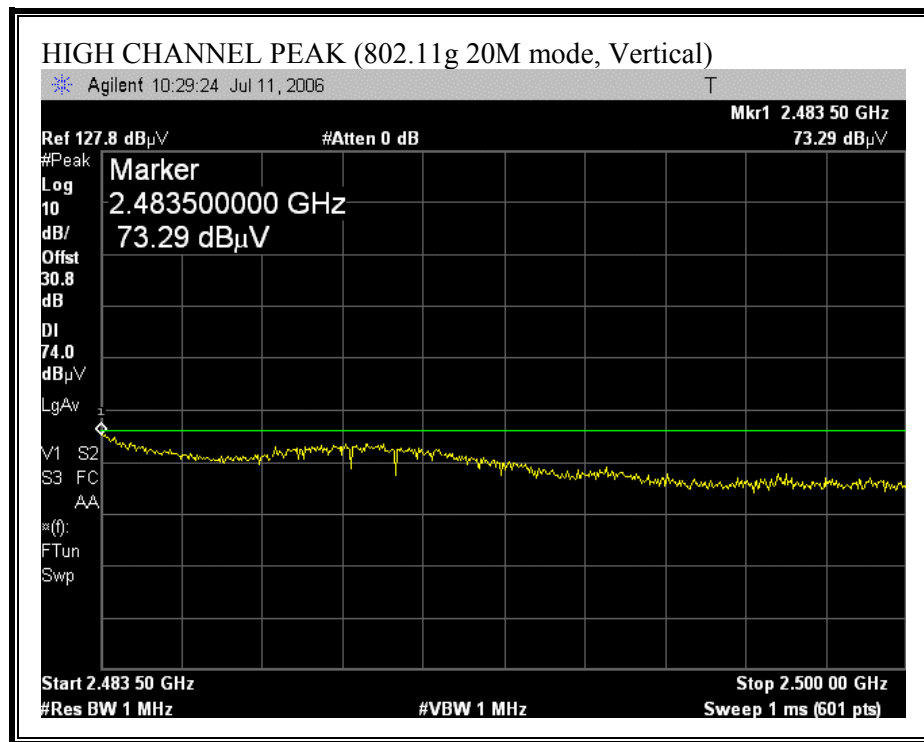

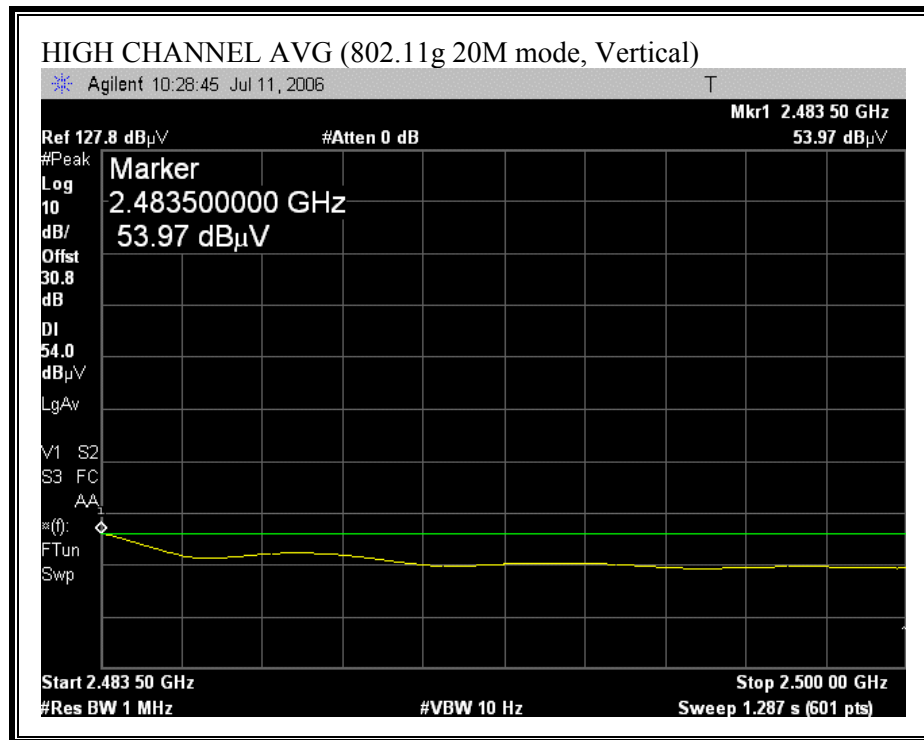



HARMONICS AND SPURIOUS EMISSIONS (802.11g 20M MODE)


High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Company:		MARVELL SEMICONDUCTOR INC.													
Project #:		06U10412													
Date:		07/13/06													
Test Engineer:		Frank Ibrahim													
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC													
Mode:		Continuously Transmitting in 11g 20M mode, 54Mbps													
EUT S/N:		010													
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz									
T60; S/N: 2238 @3m		T87 Miteq 924342				T89; ARA 18-26GHz; S/N:1049									
Hi Frequency Cables															
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz					
		Frank 177080001		Frank 187209001				R_001							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2412 MHz)															
4.824	3.0	53.48	40.10	33.0	4.0	-45.3	0.0	0.0	45.2	31.8	74	54	-28.8	-22.2	V, PowerSetting 61 62
4.824	3.0	53.52	40.20	33.0	4.0	-45.3	0.0	0.0	45.2	31.9	74	54	-28.8	-22.1	H, PowerSetting 61 62
Mid Channel (2437 MHz)															
1.340	3.0	67.06	52.07	26.3	2.3	-44.9	0.0	0.0	50.7	35.8	74	54	-23.3	-18.2	V, PowerSetting 66 66
4.874	3.0	54.52	41.10	33.1	4.0	-45.3	0.0	0.0	46.2	32.8	74	54	-27.8	-21.2	V, PowerSetting 66 66
7.311	3.0	52.70	40.00	35.5	4.6	-43.2	0.0	0.0	49.6	36.9	74	54	-24.4	-17.1	V, PowerSetting 66 66
1.340	3.0	64.03	50.90	26.3	2.3	-44.9	0.0	0.0	47.7	34.6	74	54	-26.3	-19.4	H, PowerSetting 66 66
4.874	3.0	52.05	40.10	33.1	4.0	-45.3	0.0	0.0	43.8	31.8	74	54	-30.2	-22.2	H, PowerSetting 66 66
7.311	3.0	51.05	39.30	35.5	4.6	-43.2	0.0	0.0	47.9	36.2	74	54	-26.1	-17.8	H, PowerSetting 66 66
High Channel (2462 MHz)															
4.924	3.0	54.12	41.99	33.1	4.0	-45.4	0.0	0.0	45.9	33.7	74	54	-28.1	-20.3	V, PowerSetting 61 5F
7.386	3.0	55.18	42.13	35.6	4.6	-43.1	0.0	0.0	52.3	39.2	74	54	-21.7	-14.8	V, PowerSetting 61 5F
4.924	3.0	52.22	39.80	33.1	4.0	-45.4	0.0	0.0	44.0	31.6	74	54	-30.0	-22.4	H, PowerSetting 61 5F
7.386	3.0	51.91	39.50	35.6	4.6	-43.1	0.0	0.0	49.0	36.6	74	54	-25.0	-17.4	H, PowerSetting 61 5F
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

RESTRICTED BANDEDGE (802.11g 40M MODE, LOW CHANNEL)

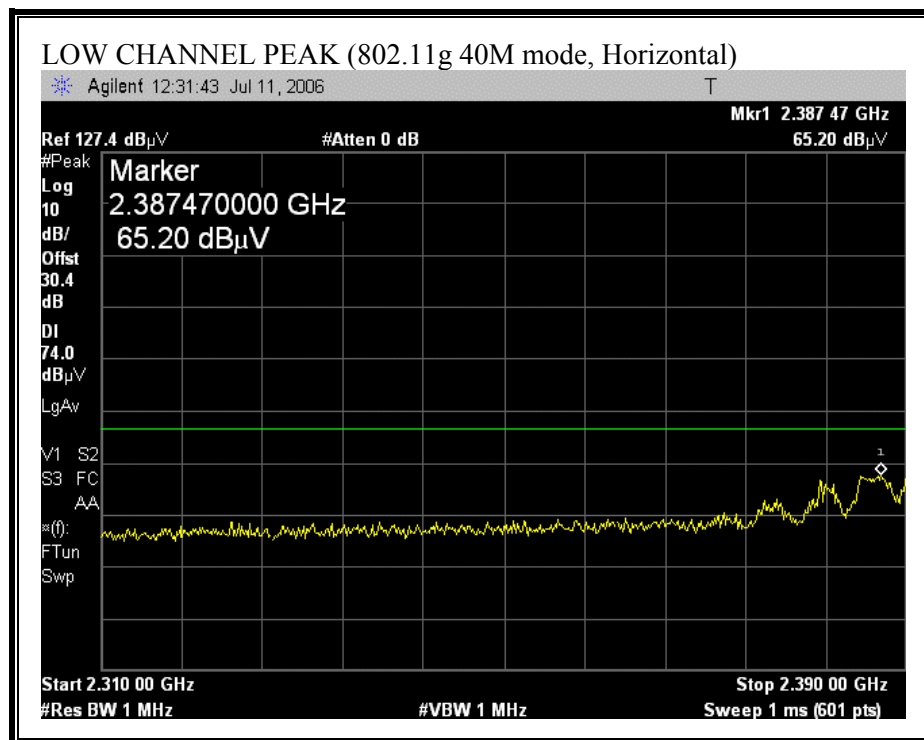


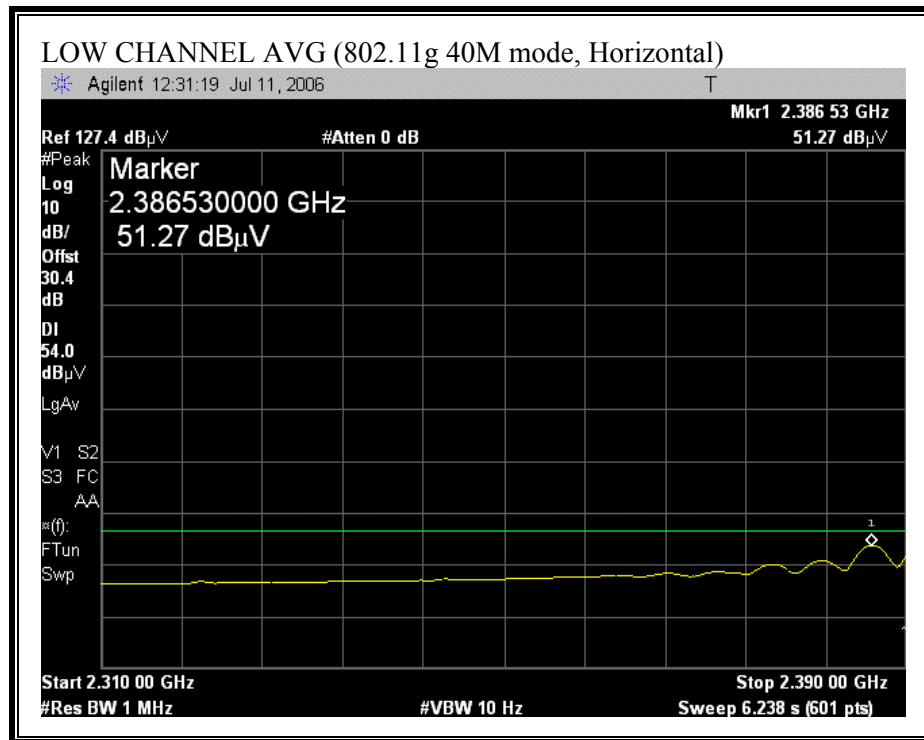


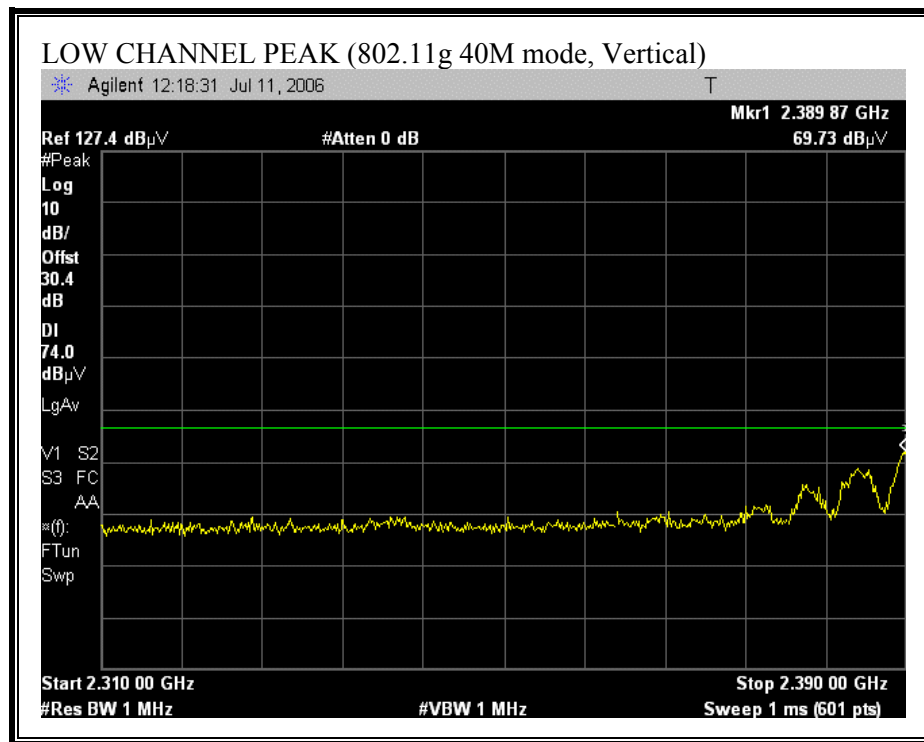


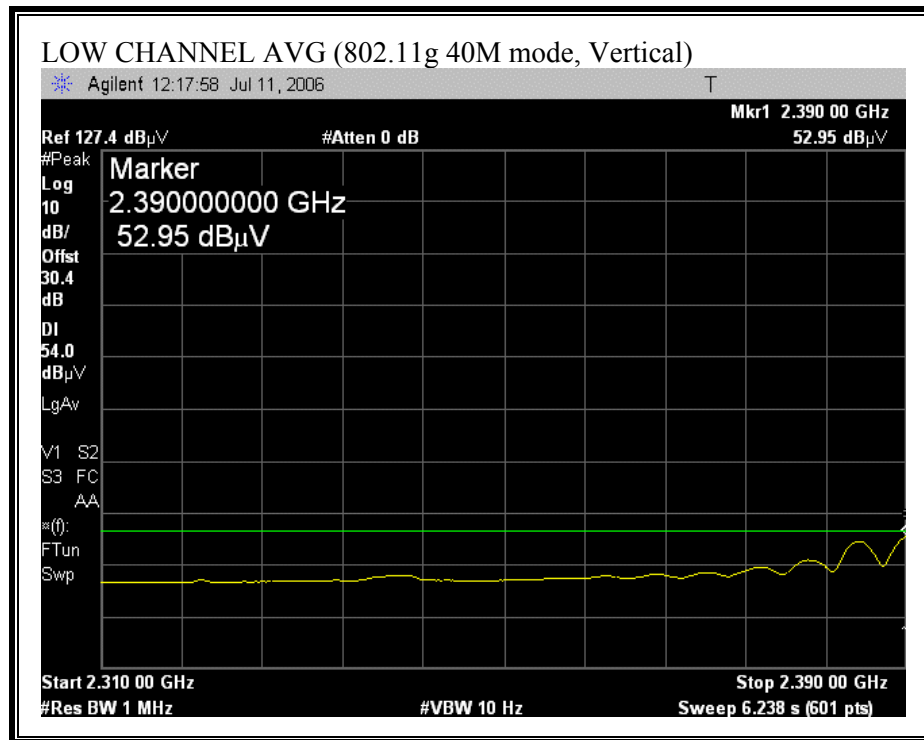


RESTRICTED BANDEDGE (802.11g 40M MODE, HIGH CHANNEL)

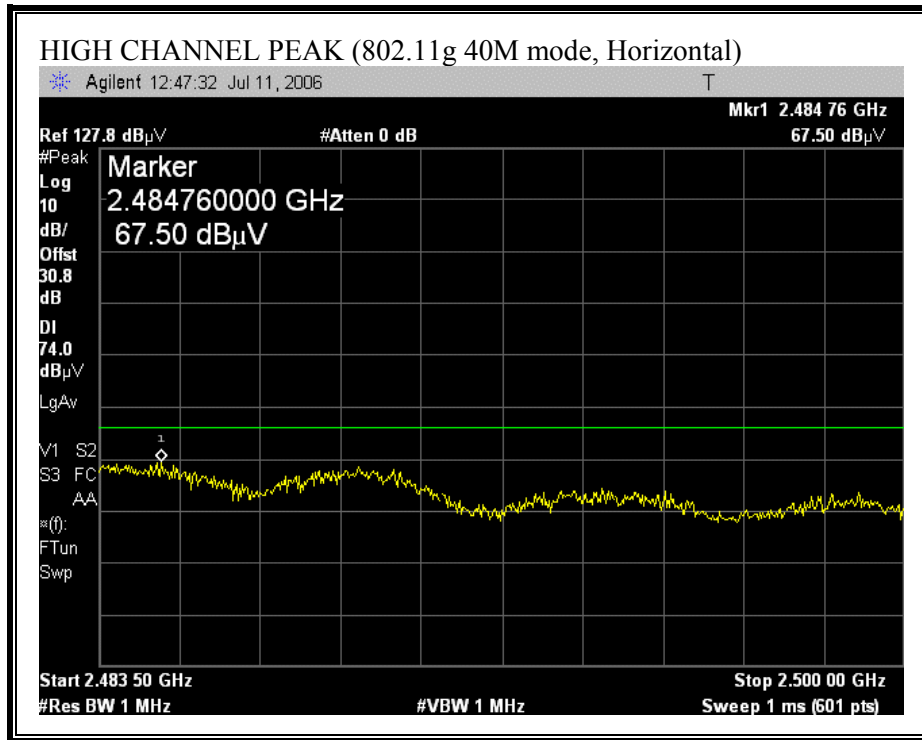

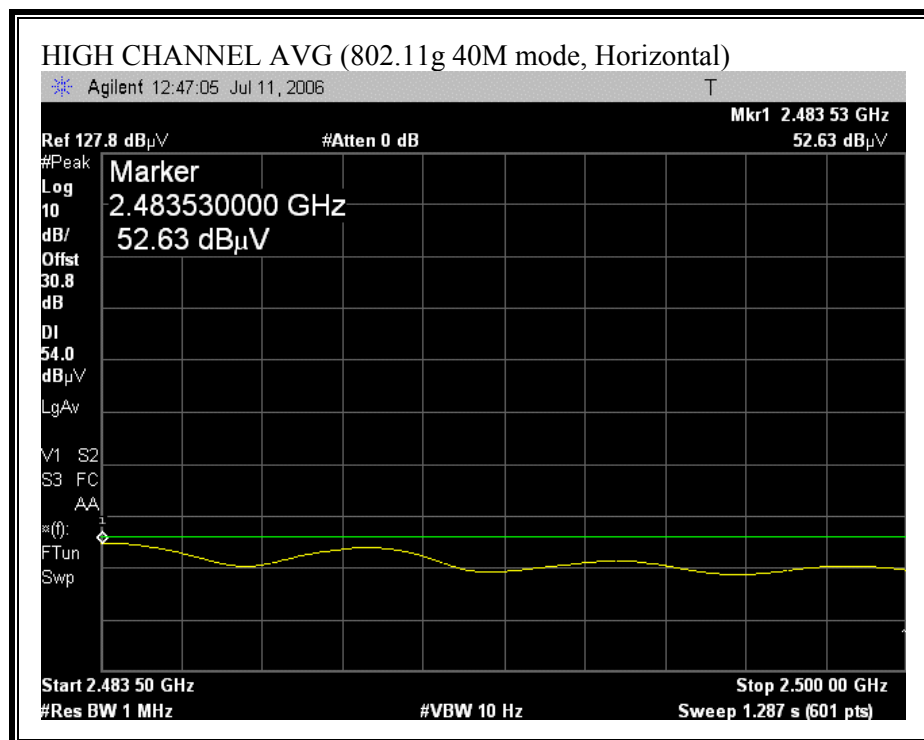

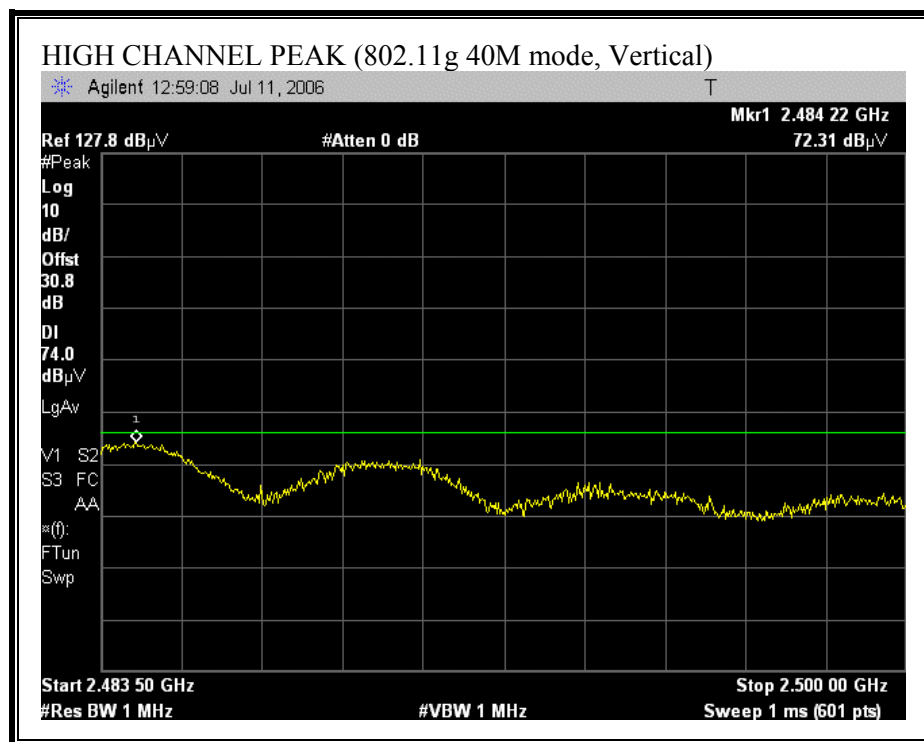

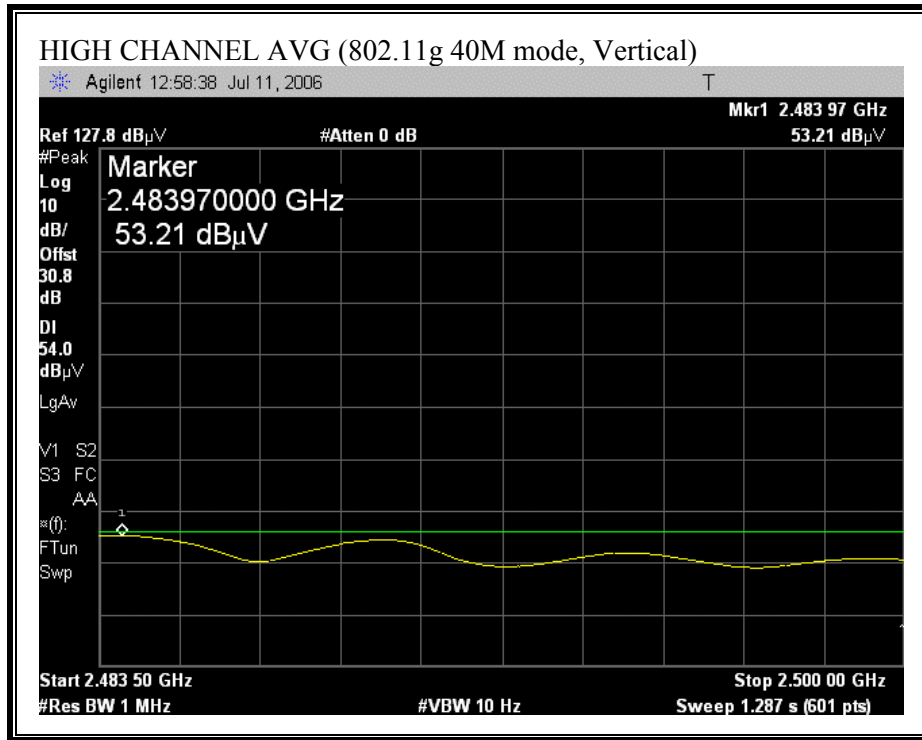



HARMONICS AND SPURIOUS EMISSIONS (802.11g 40M MODE)


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company:		MARVELL SEMICONDUCTOR INC.														
Project #:		06U10412														
Date:		07/13/06														
Test Engineer:		Frank Ibrahim														
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC														
Mode:		Continuously Transmitting in 11g 40M mode, 54Mbps														
EUT S/N:		010														
Test Equipment:																
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz										
T60; S/N: 2238 @3m		T87 Miteq 924342				T89; ARA 18-26GHz; S/N:1049										
Hi Frequency Cables																
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz						
		Frank 177080001		Frank 187209001				R_001								
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Channel (2422 MHz)																
4.844	3.0	51.99	40.10	33.0	4.0	-45.3	0.0	0.0	43.7	31.8	74	54	-30.3	-22.2	V, PowerSetting 5D 5E	
7.266	3.0	52.41	39.80	35.4	4.6	-43.3	0.0	0.0	49.1	36.5	74	54	-24.9	-17.5	V, PowerSetting 5D 5E	
4.844	3.0	52.08	39.50	33.0	4.0	-45.3	0.0	0.0	43.8	31.2	74	54	-30.2	-22.8	H, PowerSetting 5D 5E	
Mid Channel (2437 MHz)																
4.874	3.0	51.86	39.90	33.1	4.0	-45.3	0.0	0.0	43.6	31.6	74	54	-30.4	-22.4	V, PowerSetting 5E 5E	
7.311	3.0	51.63	39.10	35.5	4.6	-43.2	0.0	0.0	48.5	36.0	74	54	-25.5	-18.0	V, PowerSetting 5E 5E	
4.874	3.0	51.90	39.50	33.1	4.0	-45.3	0.0	0.0	43.6	31.2	74	54	-30.4	-22.8	H, PowerSetting 5E 5E	
7.311	3.0	51.38	39.20	35.5	4.6	-43.2	0.0	0.0	48.2	36.1	74	54	-25.8	-17.9	H, PowerSetting 5E 5E	
High Channel (2452 MHz)																
4.904	3.0	51.99	39.00	33.1	4.0	-45.3	0.0	0.0	43.7	30.7	74	54	-30.3	-23.3	V, PowerSetting 5B 59	
7.356	3.0	51.75	39.20	35.5	4.6	-43.1	0.0	0.0	48.8	36.2	74	54	-25.2	-17.8	V, PowerSetting 5B 59	
4.904	3.0	51.86	39.10	33.1	4.0	-45.3	0.0	0.0	43.6	30.8	74	54	-30.4	-23.2	H, PowerSetting 5B 59	
7.356	3.0	51.94	39.40	35.5	4.6	-43.1	0.0	0.0	48.9	36.4	74	54	-25.1	-17.6	H, PowerSetting 5B 59	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)

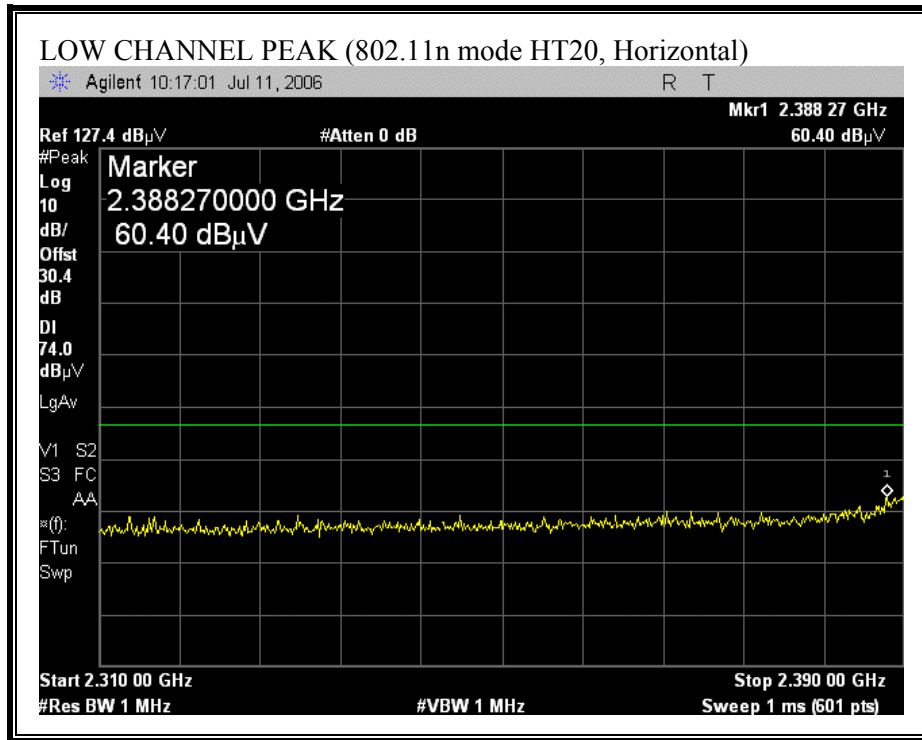


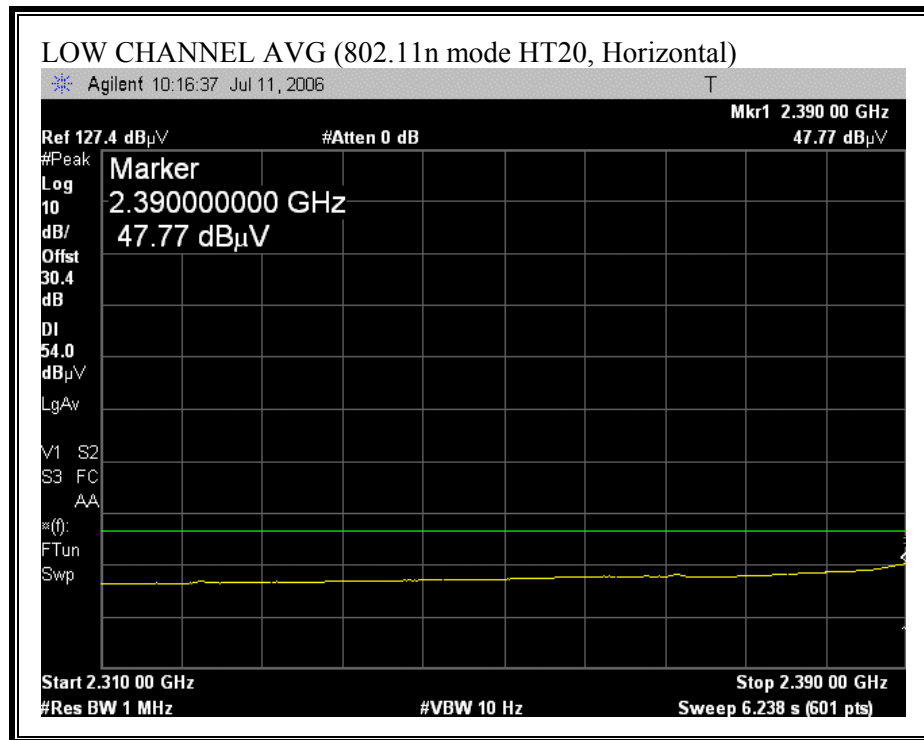


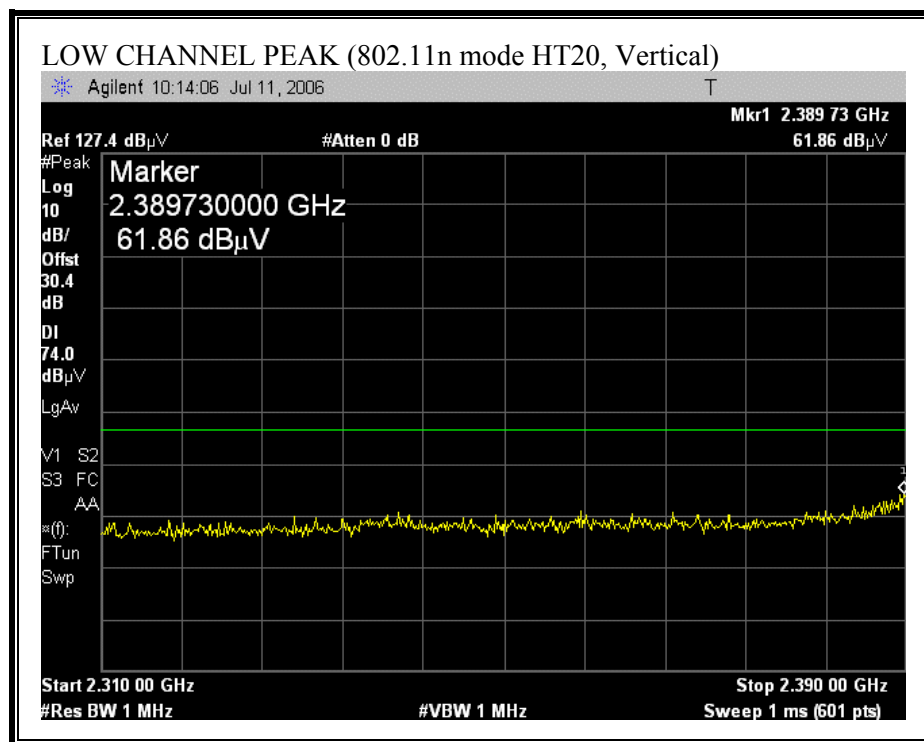


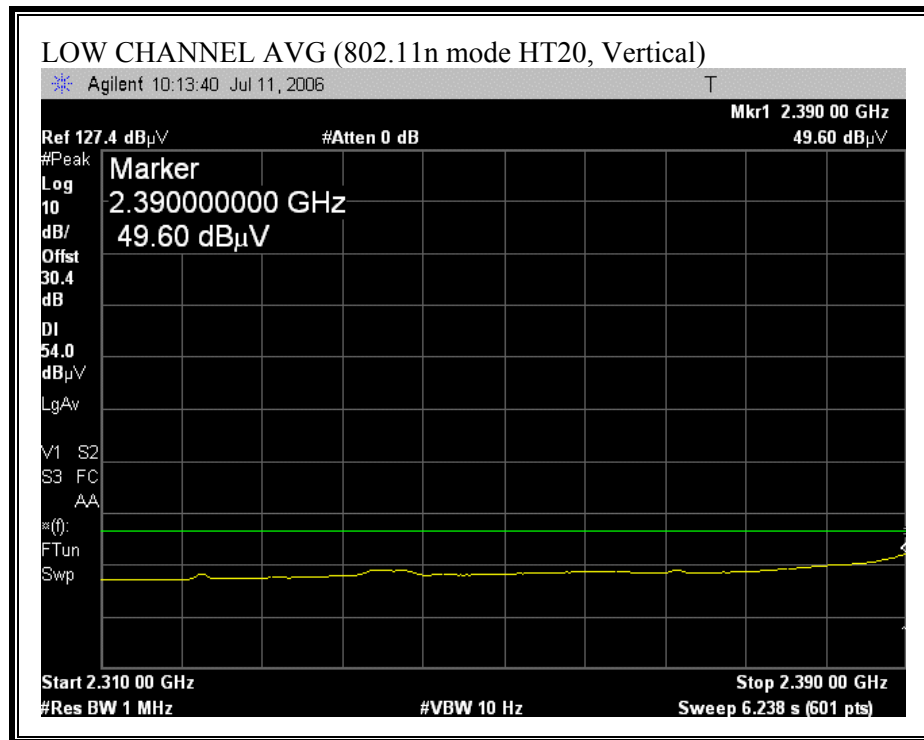


RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)

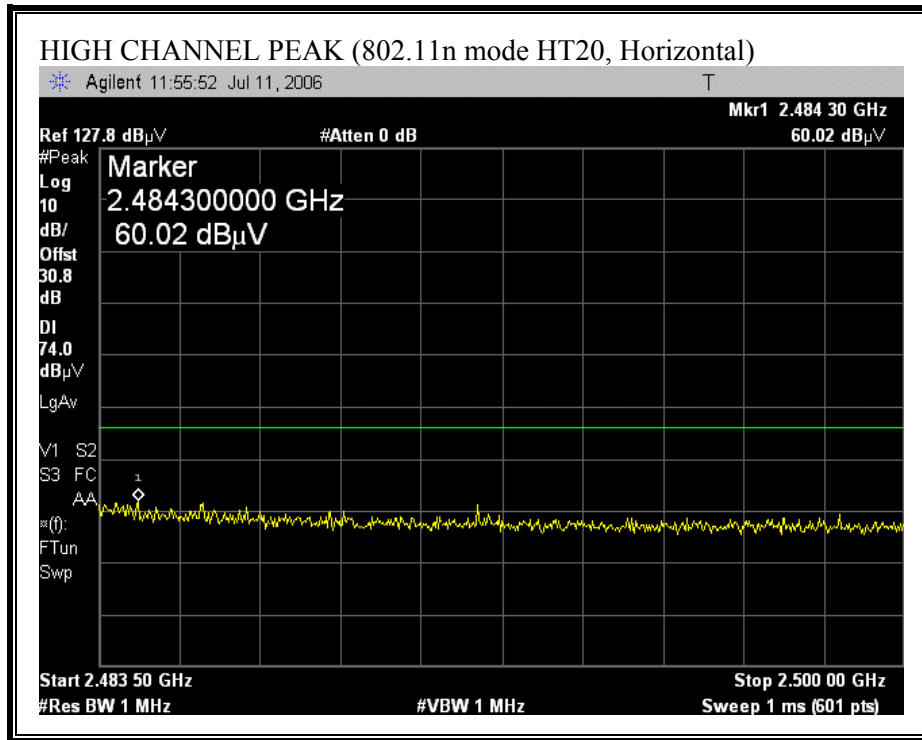

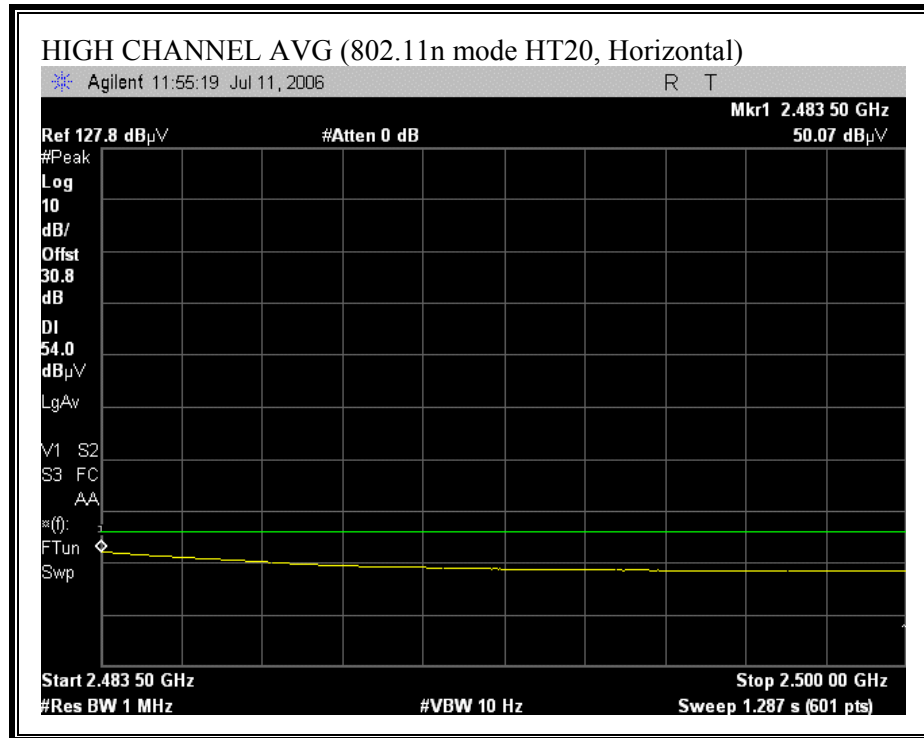

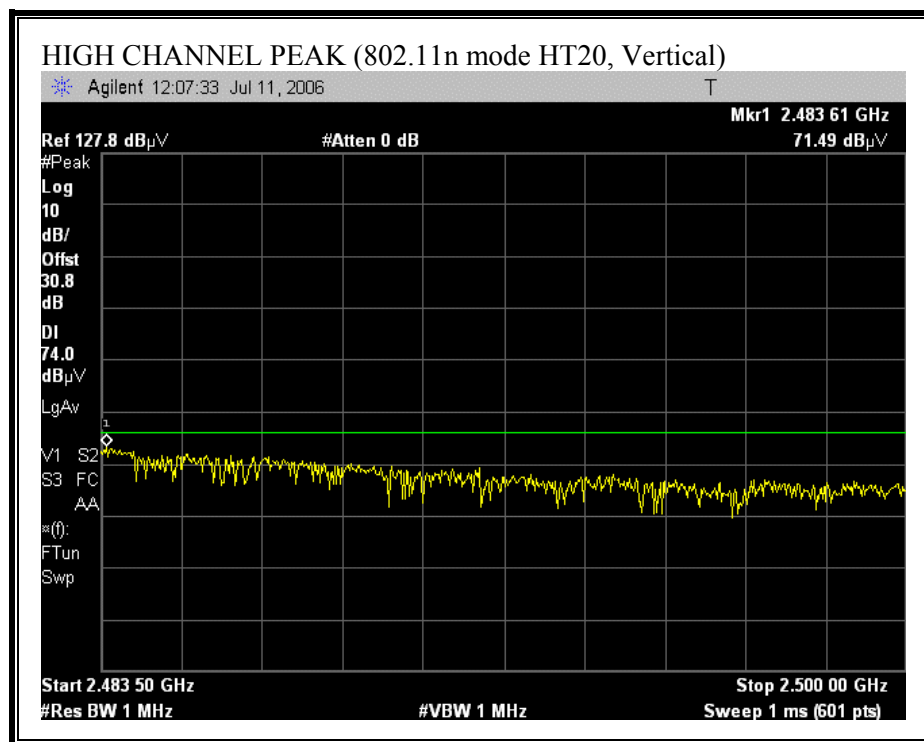

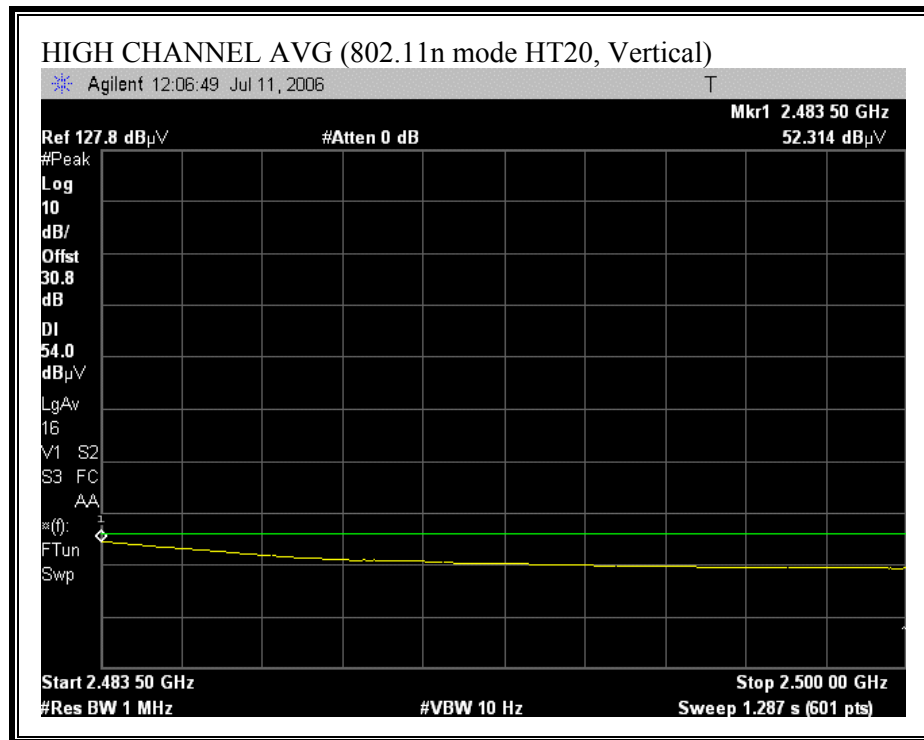



HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)


High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		MARVELL SEMICONDUCTOR INC.																	
Project #:		06U10412																	
Date:		07/13/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC																	
Mode:		Continuously Transmitting in HT 20M mode, MCS11																	
EUT S/N:		010																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049							
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001								R_001			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (2412 MHz)																			
4.824	3.0	52.14	39.50	33.0	4.0	-45.3	0.0	0.0	43.8	31.2	74	54	-30.2	-22.8	V, PowerSetting 60 60				
4.824	3.0	52.09	39.30	33.0	4.0	-45.3	0.0	0.0	43.8	31.0	74	54	-30.2	-23.0	H, PowerSetting 60 60				
Mid Channel (2437 MHz)																			
4.874	3.0	51.30	39.40	33.1	4.0	-45.3	0.0	0.0	43.0	31.1	74	54	-31.0	-22.9	V, PowerSetting 64 65				
7.311	3.0	53.57	41.42	35.5	4.6	-43.2	0.0	0.0	50.4	38.3	74	54	-23.6	-15.7	V, PowerSetting 64 65				
4.874	3.0	51.28	39.30	33.1	4.0	-45.3	0.0	0.0	43.0	31.0	74	54	-31.0	-23.0	H, PowerSetting 64 65				
7.311	3.0	51.07	39.10	35.5	4.6	-43.2	0.0	0.0	47.9	36.0	74	54	-26.1	-18.0	H, PowerSetting 64 65				
High Channel (2462 MHz)																			
4.924	3.0	51.99	39.40	33.1	4.0	-45.4	0.0	0.0	43.7	31.2	74	54	-30.3	-22.8	V, PowerSetting 5D 5C				
7.386	3.0	51.66	39.30	35.6	4.6	-43.1	0.0	0.0	48.8	36.4	74	54	-25.2	-17.6	V, PowerSetting 5D 5C				
4.924	3.0	52.14	39.20	33.1	4.0	-45.4	0.0	0.0	43.9	31.0	74	54	-30.1	-23.0	H, PowerSetting 5D 5C				
7.386	3.0	51.62	39.50	35.6	4.6	-43.1	0.0	0.0	48.7	36.6	74	54	-25.3	-17.4	H, PowerSetting 5D 5C				
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																			


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)

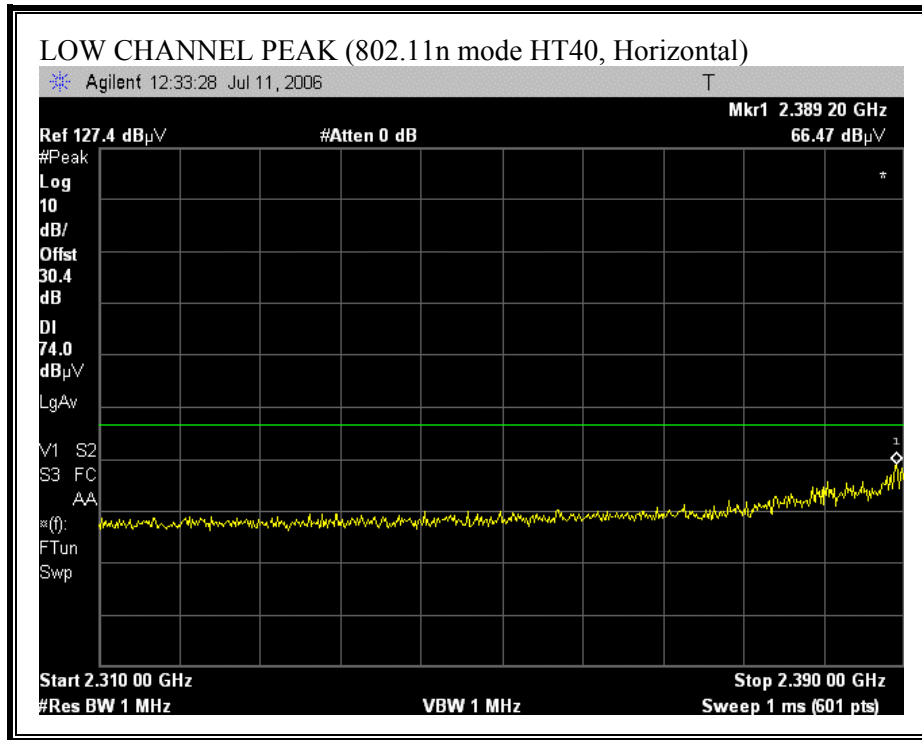


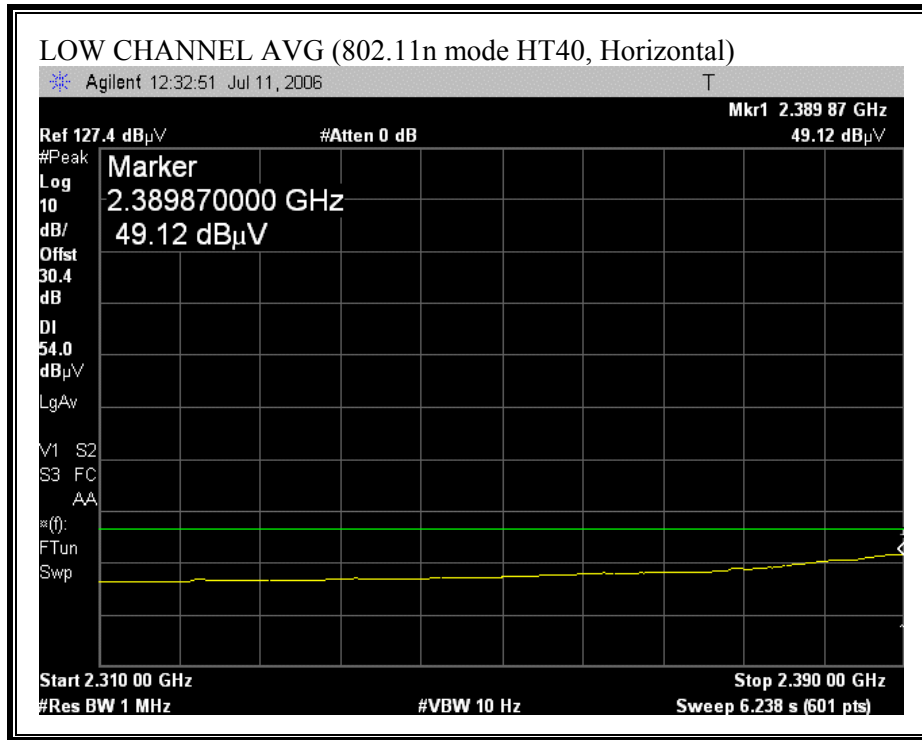


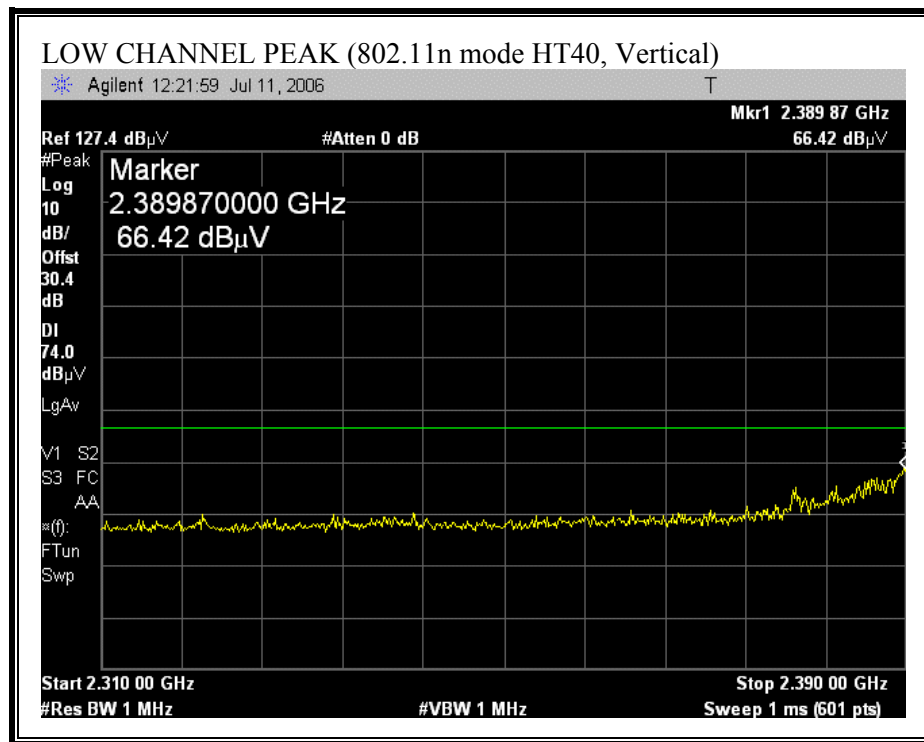


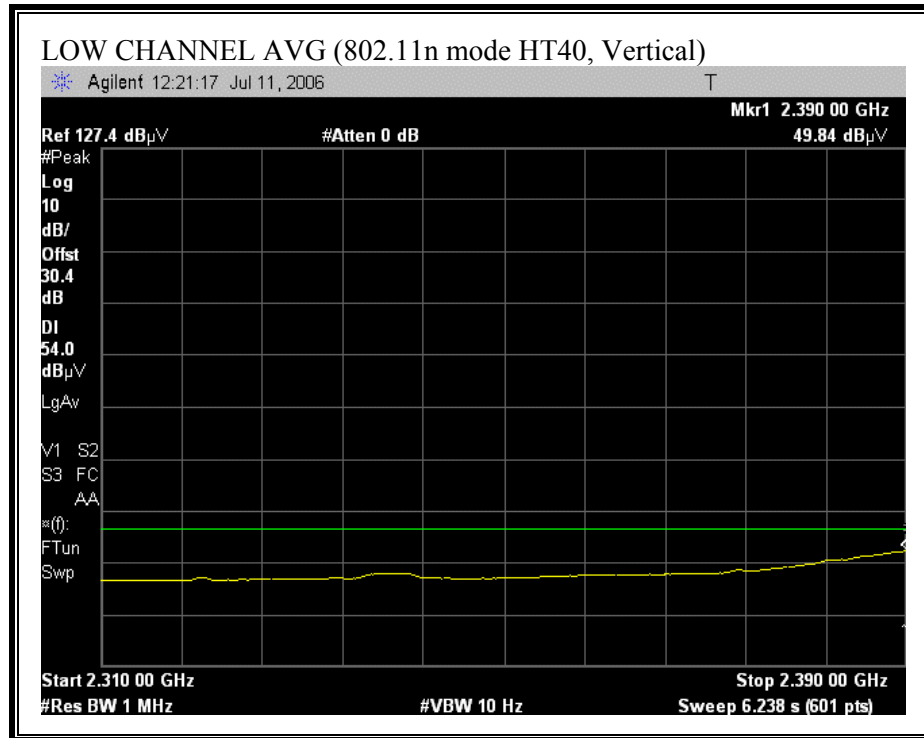


RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)

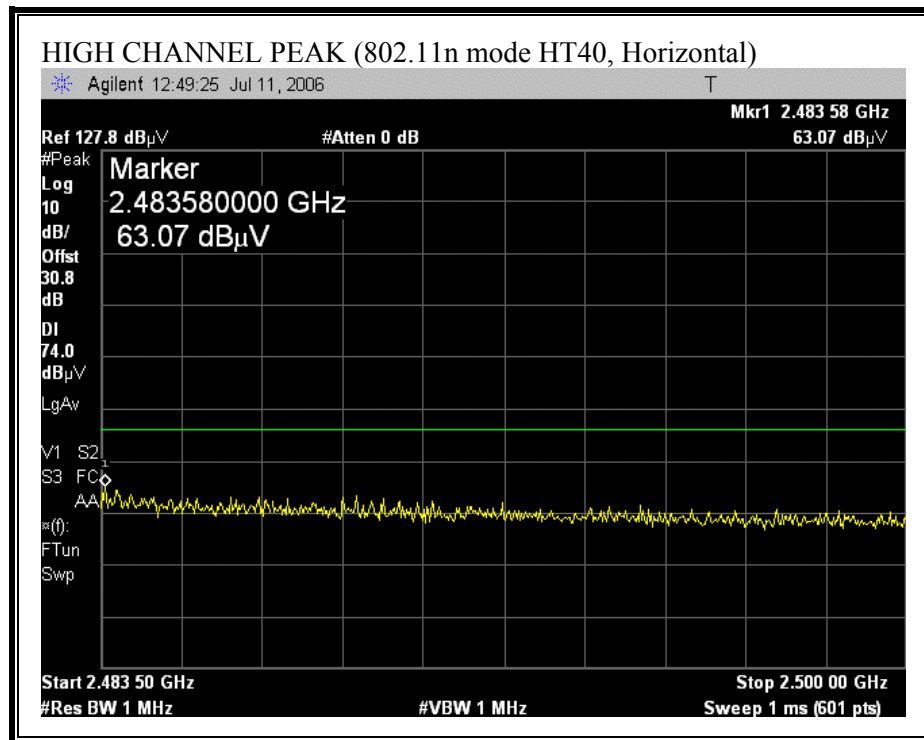

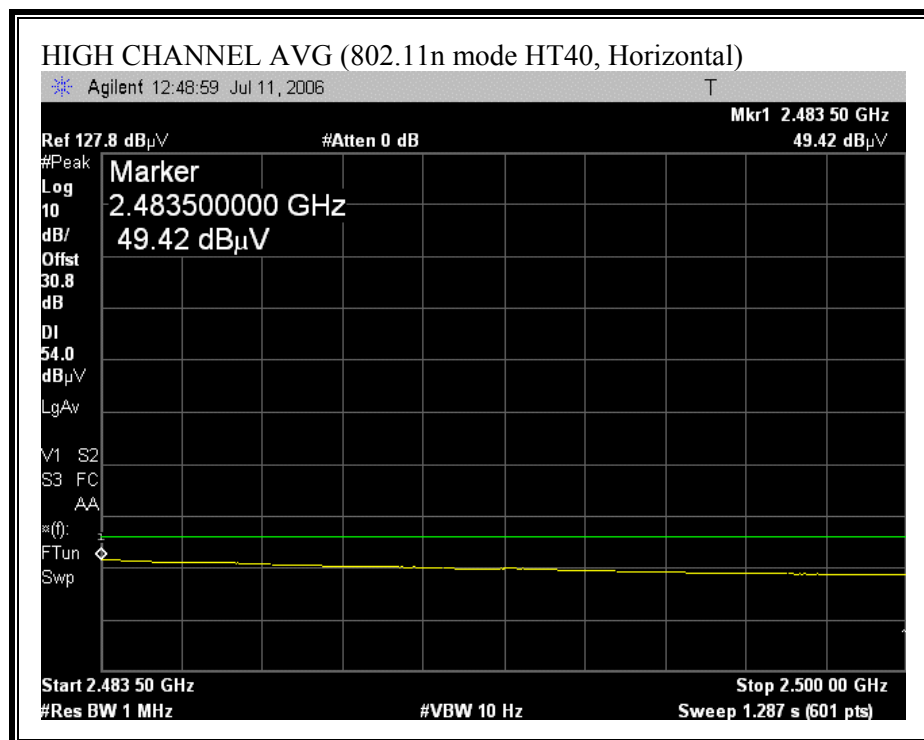

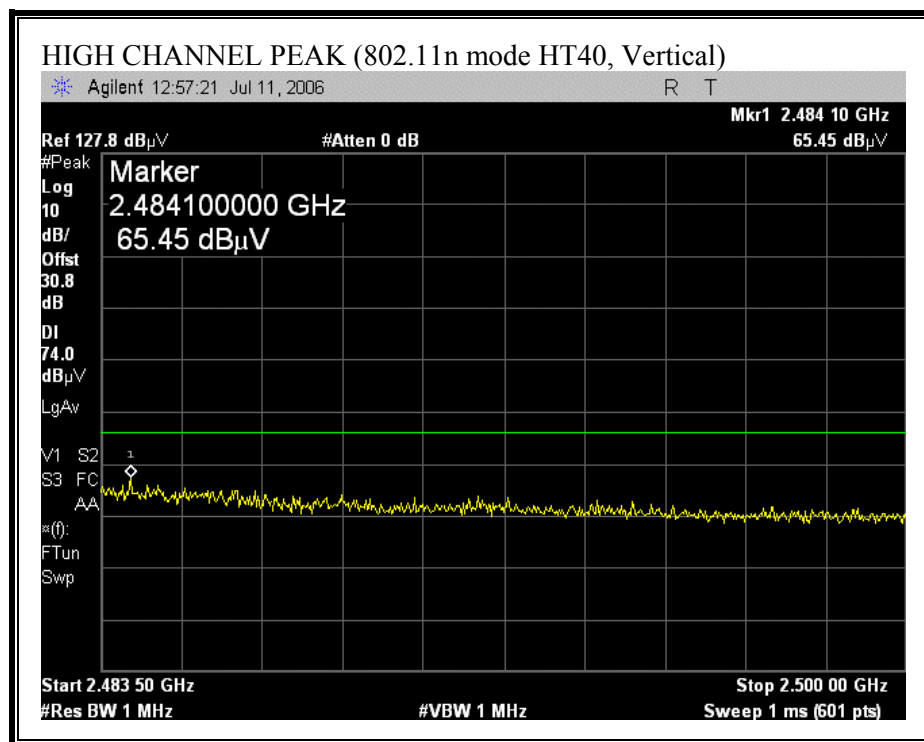

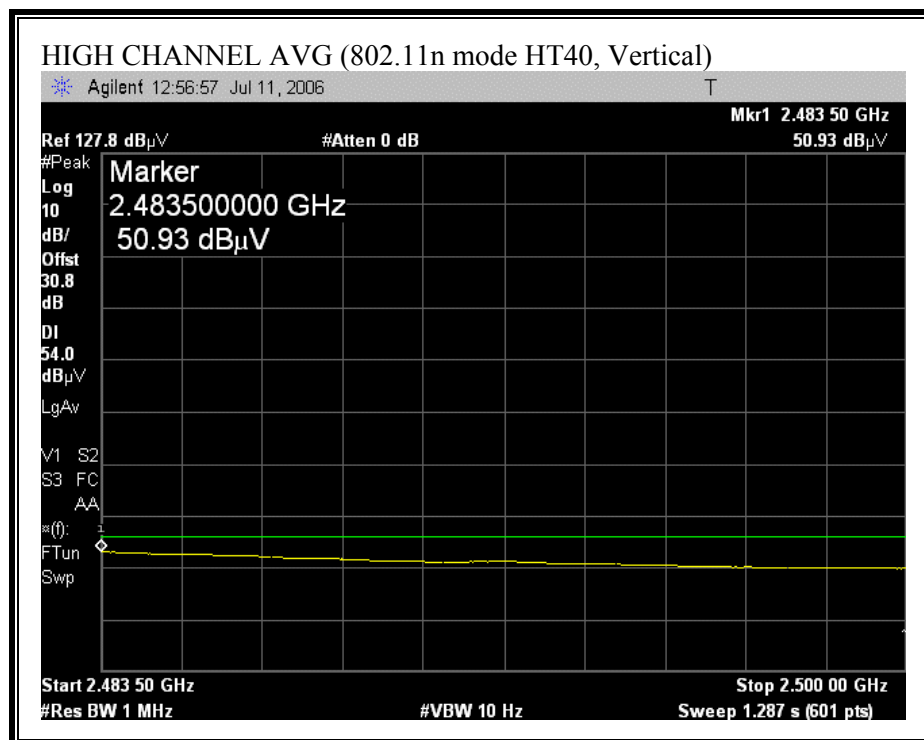

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		MARVELL SEMICONDUCTOR INC.																	
Project #:		06U10412																	
Date:		07/14/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC																	
Mode:		Continuously Transmitting in HT 40M mode, MCS15																	
EUT S/N:		010																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049							
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001								R_001			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (2422 MHz)																			
4.844	3.0	51.05	39.20	33.0	4.0	-45.3	0.0	0.0	42.8	30.9	74	54	-31.2	-23.1	V, PowerSetting 5F 60				
7.266	3.0	51.40	39.20	35.4	4.6	-43.3	0.0	0.0	48.1	35.9	74	54	-25.9	-18.1	V, PowerSetting 5F 60				
4.844	3.0	51.00	39.00	33.0	4.0	-45.3	0.0	0.0	42.7	30.7	74	54	-31.3	-23.3	H, PowerSetting 5F 60				
Mid Channel (2437 MHz)																			
4.874	3.0	51.59	39.70	33.1	4.0	-45.3	0.0	0.0	43.3	31.4	74	54	-30.7	-22.6	V, PowerSetting 5C 5B				
7.311	3.0	50.74	39.30	35.5	4.6	-43.2	0.0	0.0	47.6	36.2	74	54	-26.4	-17.8	V, PowerSetting 5C 5B				
4.874	3.0	52.16	40.20	33.1	4.0	-45.3	0.0	0.0	43.9	31.9	74	54	-30.1	-22.1	H, PowerSetting 5C 5B				
7.311	3.0	50.98	39.10	35.5	4.6	-43.2	0.0	0.0	47.8	36.0	74	54	-26.2	-18.0	H, PowerSetting 5C 5B				
High Channel (2452 MHz)																			
4.904	3.0	51.60	39.40	33.1	4.0	-45.3	0.0	0.0	43.3	31.1	74	54	-30.7	-22.9	V, PowerSetting 5C 5B				
7.356	3.0	50.97	39.10	35.5	4.6	-43.1	0.0	0.0	48.0	36.1	74	54	-26.0	-17.9	V, PowerSetting 5C 5B				
4.904	3.0	51.90	39.50	33.1	4.0	-45.3	0.0	0.0	43.6	31.2	74	54	-30.4	-22.8	H, PowerSetting 5C 5B				
7.356	3.0	51.03	39.40	35.5	4.6	-43.1	0.0	0.0	48.0	36.4	74	54	-26.0	-17.6	H, PowerSetting 5C 5B				
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

7.2.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a 20M MODE)

High Frequency Measurement																	
Compliance Certification Services, Morgan Hill Open Field Site																	
Company:		Marvell															
Project #:		06U10412															
Date:		07/19/06															
Test Engineer:		Frank Ibrahim															
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC															
S/N:		010															
Mode:		Continuously Transmitting in 11a 20M mode, 9Mbps															
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz								
T60; S/N: 2238 @3m			T87 Miteq 924342						T89; ARA 18-26GHz; S/N:1049								
Hi Frequency Cables																	
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz		
			Frank 177080001			Frank 187209001						R_001					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Channel (5745 MHz)																	
11.490	3.0	51.1	39.1	37.4	5.2	-39.8	0.0	0.0	53.9	41.9	74	54	-20.1	-12.1	V, Settings 6B 6E		
11.490	3.0	49.9	38.3	37.4	5.2	-39.8	0.0	0.0	52.8	41.1	74	54	-21.2	-12.9	H, Settings 6B 6E		
Middle Channel (5785 MHz)																	
11.570	3.0	50.4	38.0	37.4	5.2	-39.8	0.0	0.0	53.3	40.8	74	54	-20.7	-13.2	V, Settings 6C 6F		
11.570	3.0	50.4	38.1	37.4	5.2	-39.8	0.0	0.0	53.3	40.9	74	54	-20.7	-13.1	H, Settings 6C 6F		
High Channel (5825 MHz)																	
11.650	3.0	50.9	37.5	37.4	5.3	-39.8	0.0	0.0	53.7	40.3	74	54	-20.3	-13.7	V, Settings 6E 7I		
11.650	3.0	50.5	37.2	37.4	5.3	-39.8	0.0	0.0	53.3	40.0	74	54	-20.7	-14.0	H, Settings 6E 7I		
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

HARMONICS AND SPURIOUS EMISSIONS (802.11a 40M MODE)

High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		Marvell																	
Project #:		06U10412																	
Date:		07/19/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC																	
S/N:		010																	
Mode:		Continuously Transmitting in 11a 40M mode, 9Mbps																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049							
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001								R_001			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (5755 MHz)																			
11.510	3.0	51.0	38.1	37.4	5.2	-39.8	0.0	0.0	53.8	40.9	74	54	-20.2	-13.1	V, Settings 63 65				
11.510	3.0	50.7	7.7	37.4	5.2	-39.8	0.0	0.0	53.5	10.5	74	54	-20.5	-43.5	H, Settings 63 65				
High Channel (5795 MHz)																			
11.590	3.0	50.3	38.6	37.4	5.2	-39.8	0.0	0.0	53.1	41.4	74	54	-20.9	-12.6	V, Settings 6E 71				
11.590	3.0	50.8	38.0	37.4	5.2	-39.8	0.0	0.0	53.6	40.8	74	54	-20.4	-13.2	H, Settings 6E 71				
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement																	
Compliance Certification Services, Morgan Hill Open Field Site																	
Company:		Marvell															
Project #:		06U10412															
Date:		07/19/06															
Test Engineer:		Frank Ibrahim															
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC															
S/N:		010															
Mode:		Continuously Transmitting in HT 20M mode, MCS0															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz					
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049					
Hi Frequency Cables																	
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz	
				Frank 177080001				Frank 187209001						R_001			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Channel (5745 MHz)																	
11.490	3.0	51.6	38.5	37.4	5.2	-39.8	0.0	0.0	54.4	41.3	74	54	-19.6	-12.7	V, Settings 6B 6E		
11.490	3.0	50.7	37.5	37.4	5.2	-39.8	0.0	0.0	53.5	40.3	74	54	-20.5	-13.7	H, Settings 6B 6E		
Middle Channel (5785 MHz)																	
11.570	3.0	50.9	37.8	37.4	5.2	-39.8	0.0	0.0	53.7	40.6	74	54	-20.3	-13.4	V, Settings 6C 6F		
11.570	3.0	50.1	37.5	37.4	5.2	-39.8	0.0	0.0	52.9	40.3	74	54	-21.1	-13.7	H, Settings 6C 6F		
High Channel (5825 MHz)																	
11.650	3.0	51.0	37.2	37.4	5.3	-39.8	0.0	0.0	53.8	40.0	74	54	-20.2	-14.0	V, Settings 6D 70		
11.650	3.0	50.8	37.5	37.4	5.3	-39.8	0.0	0.0	53.6	40.3	74	54	-20.4	-13.7	H, Settings 6D 70		
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement																			
Compliance Certification Services, Morgan Hill Open Field Site																			
Company:		Marvell																	
Project #:		06U10412																	
Date:		07/19/06																	
Test Engineer:		Frank Ibrahim																	
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC																	
S/N:		010																	
Mode:		Continuously Transmitting in HT 40M mode, MCS0																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049							
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001								R_001			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fctr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (5755 MHz)																			
11.510	3.0	50.5	38.6	37.4	5.2	-39.8	0.0	0.0	53.3	41.4	74	54	-20.7	-12.6	V, Settings 66 68				
11.510	3.0	51.0	38.9	37.4	5.2	-39.8	0.0	0.0	53.8	41.7	74	54	-20.2	-12.3	H, Settings 66 68				
High Channel (5795 MHz)																			
11.590	3.0	50.0	37.4	37.4	5.2	-39.8	0.0	0.0	52.8	40.2	74	54	-21.2	-13.8	V, Settings 6E 70				
11.590	3.0	50.5	37.9	37.4	5.2	-39.8	0.0	0.0	53.3	40.7	74	54	-20.7	-13.3	H, Settings 6E 70				
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 4 File#: RAD0717.EMI Date: 07-17-2006 Time: 18:27:49

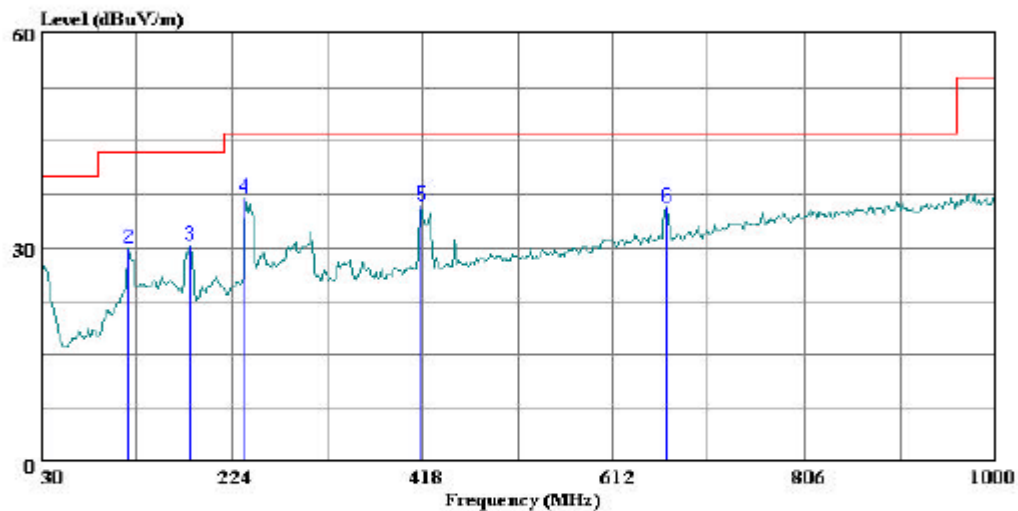

(Auxiliary ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Frank Ibrahim
Company: : Marvell
Project #: : 06U10412
Configuration: : EUT with PIFA Antenna inside Apple
: Laptop PC
Mode of Operation: TX ON in 11b mode, Mid Channel, 11Mbps
S/N : 010

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.000	7.28	20.45	27.73	40.00	-12.27	Peak
2	119.240	14.79	15.05	29.84	43.50	-13.66	Peak
3	182.290	17.29	12.95	30.24	43.50	-13.26	Peak
4	237.580	23.62	13.39	37.01	46.00	-8.99	Peak
5	417.030	17.50	18.47	35.97	46.00	-10.03	Peak
6	667.290	12.99	22.66	35.65	46.00	-10.35	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 2 File#: RAD0717.EMI Date: 07-17-2006 Time: 18:21:25

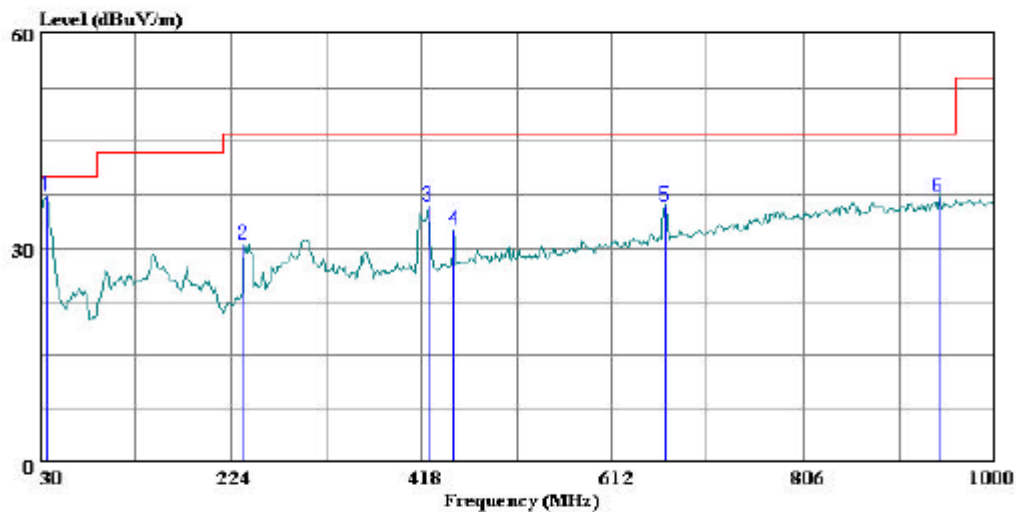

(Auxiliary)

Trace: 1

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : Frank Ibrahim
Company: : Marvell
Project #: : 06U10412
Configuration: : EUT with PIFA Antenna inside Apple
: Laptop PC
Mode of Operation: TX ON in 11b mode, Mid Channel, 11Mbps
S/N : 010

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	35.820	18.71	18.58	37.29	40.00	-2.71	Peak
2	237.580	17.17	13.39	30.56	46.00	-15.44	Peak
3	424.790	17.21	18.64	35.85	46.00	-10.15	Peak
4	450.980	13.31	19.20	32.51	46.00	-13.49	Peak
5	666.320	13.26	22.64	35.91	46.00	-10.09	Peak
6	942.770	10.70	26.43	37.13	46.00	-8.87	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.47	40.28	--	--	0.00	56.58	46.58	-16.30	-6.30	L1
1.38	39.58	--	--	0.00	56.00	46.00	-16.42	-6.42	L1
19.22	40.40	--	--	0.00	60.00	50.00	-19.60	-9.60	L1
0.47	37.38	--	--	0.00	56.58	46.58	-19.20	-9.20	L2
0.76	34.62	--	--	0.00	56.00	46.00	-21.38	-11.38	L2
13.34	43.78	--	--	0.00	60.00	50.00	-16.22	-6.22	L2
6 Worst Data									

LINE 1 AND LINE 2 RESULTS

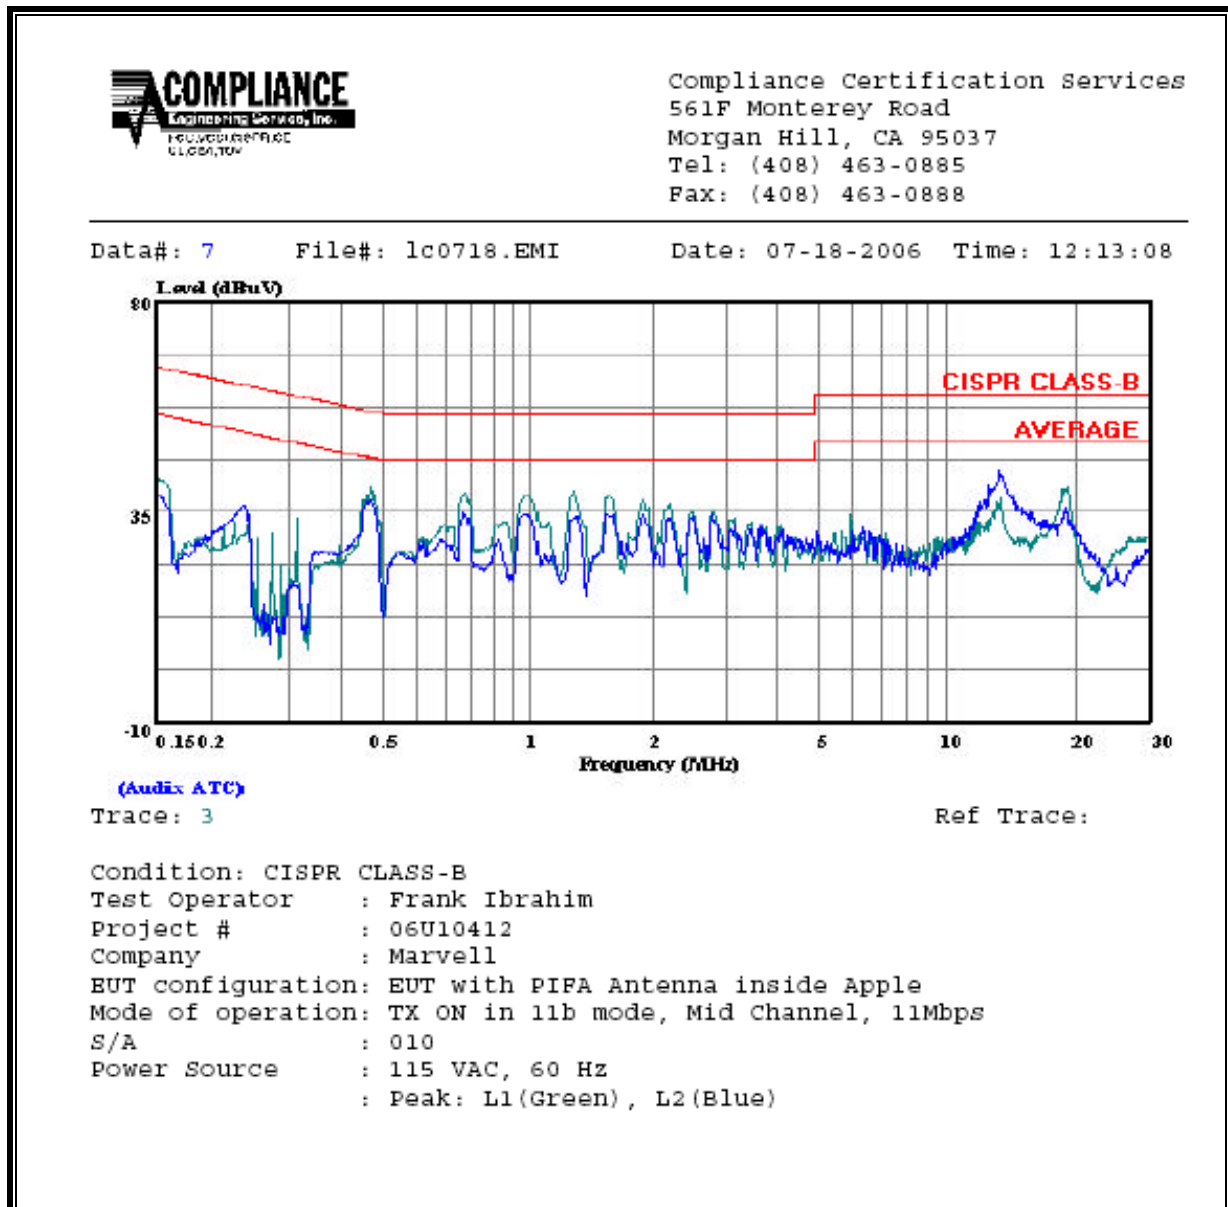

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP



RADIATED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT