

FCC CERTIFICATION RADIO MEASUREMENT TECHNICAL REPORT

On Model Name: Remote Control Switch

Model Number : 2022

Trademark : 

FCC ID : UB52022CHINA

Prepared for NINGBO ALL-RF ELECTRONIC CO., LTD.

According to FCC Part 15 (2006), Subpart C


Test Report #: NIN-0604-0416SH-FCC

Prepared by: Chris Huang

Reviewed by: Harry Zhao

QC Manager: Paul Chen

Test Report Released by:



Paul Chen

2006 June 15

Date

Test Location

Tests performed at EMC Compliance Management Group (China) in a Certified ANSI Semi-Anechoic Chamber and Shielded Room performed testing.

*Test Site Location: Jiangsu Electronic Products
 Supervision & Inspection Institute
 No 107 Ge lane ZhongQiao
 WuXi JiangSu, China
Tel: 86-510-5140037
Fax: 86-510-5105579
Registration Number: 399439*

Accreditation Bodies

EMC Compliance Management Group is a fully accredited Test Laboratory for ITE, ISM and Telecommunications Products.



In compliance with the site registration requirements of Section 2.948 of the FCC Rules to perform EMI measurements for the general public.



Accredited by the National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code # 200068-0.

Table of Contents

<i>DISCLAIMER NOTICE</i>	<i>1</i>
<i>REPRODUCTION CLAUSE</i>	<i>1</i>
<i>OPINIONS AND INTERPRETATIONS</i>	<i>1</i>
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	<i>1</i>
<i>ADMINISTRATIVE DATA</i>	<i>2</i>
<i>EUT DESCRIPTION</i>	<i>2</i>
<i>TEST SUMMARY</i>	<i>3</i>
<i>TEST MODE JUSTIFICATION</i>	<i>4</i>
<i>EUT EXERCISE SOFTWARE</i>	<i>4</i>
<i>EQUIPMENT MODIFICATION</i>	<i>4</i>
<i>TEST SYSTEM DETAILS</i>	<i>5</i>
<i>CONFIGURATION OF TESTED SYSTEM</i>	<i>6</i>
<i>EUT SAMPLE PHOTOS OF 2022</i>	<i>7</i>
<i>ATTACHMENT 1 - ANTENNA REQUIREMENT</i>	<i>11</i>
<i>ATTACHMENT 2 - RESTRICTED BAND OF OPERATION</i>	<i>14</i>
<i>ATTACHMENT 3 - OPERATION MODE</i>	<i>20</i>
<i>ATTACHMENT 4 -FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS</i>	<i>23</i>
<i>ATTACHMENT 5 - BANDWIDTH TEST</i>	<i>33-37</i>

Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from EMC Compliance Management Group, 670 National Ave., Mountain View, CA 94043.

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of EMC Compliance Management Group Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : Remote Control Switch

Model Number : 2022

Trade Mark : 

Date Tested : 2006, May 31

Applicant : NINGBO ALL-RF ELECTRONIC CO., LTD.
No.6, Tongtu RD., Jiangdong District,
Ningbo City, China

Telephone : 86-574-87784581

Fax : 86-574-87770404

Manufacturer : NINGBO ALL-RF ELECTRONIC CO., LTD.
No.6, Tongtu RD., Jiangdong District,
Ningbo City, China

EUT Description

NINGBO ALL-RF ELECTRONIC CO., LTD Model number 2022 (referred to as the EUT in this test report) is a transmitter part of Remote Control Switch. The transmitter is manually operated and has a button. It also has a gear selector which can select from 6 codes. When gear selector of the receiver of power switch is adjusted corresponding with the transmitter, the remote control will be accomplished. The codes don't influence the RF characteristics.

Test Summary

The Electromagnetic Compatibility requirements on TAT-E for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

EMC Test Items			
<i>Reference FCC Part 15 (2006), Subpart C</i>			
Specification	Description	Test Results	Remark
<i>FCC Part 15.203</i>	<i>Antenna Requirement</i>	<i>Compliance</i>	<i>Attachment 1</i>
<i>FCC Part 15.205</i>	<i>Restricted Band of Operation</i>	<i>Compliance</i>	<i>Attachment 2</i>
<i>FCC Part 15.207</i>	<i>Conducted Limits</i>	<i>Test is not applicable, because EUT only employ battery power for operation.</i>	
<i>FCC Part 15.209</i>	<i>Radiated Emission Limits</i>	<i>Compliance</i>	<i>Refer to Attachment 4</i>
<i>FCC Part 15.231</i>	<i>Periodic Operation in the Band 40.66-40.70MHz and above 70MHz</i>	--	--
<i>(a)</i>	<i>Operation Mode</i>	<i>Compliance</i>	<i>Attachment 3</i>
<i>(b)</i>	<i>Field Strength of Fundamental and Spurious Emissions</i>	<i>Compliance</i>	<i>Attachment 4</i>
<i>(c)</i>	<i>Bandwidth</i>	<i>Compliance</i>	<i>Attachment 5</i>

Test Mode Justification

The test modes (Lie, Stand) were done for testing.

Note: Lie mode means let EUT put flat;

Stand mode means let EUT stand up.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

EUT Exercise Software

The device is not programmable and does not use software.

Equipment Modification


Any modifications installed previous to testing by NINGBO ALL-RF ELECTRONIC CO., LTD will be incorporated in each production model sold or leased in United States.

There were no modifications installed by EMC Compliance Management Group (China) test personnel.

Test System Details

EUT	
Model Number:	2022
Trademark::	
Serial Number:	Engineering Sample
Input Voltage:	12V DC (1*12V alkaline battery)
Description:	Remote Control Switch
Manufacturer:	NINGBO ALL-RF ELECTRONIC CO., LTD
Support Equipment	
None	
Cable Description	
None	

Configuration of Tested System

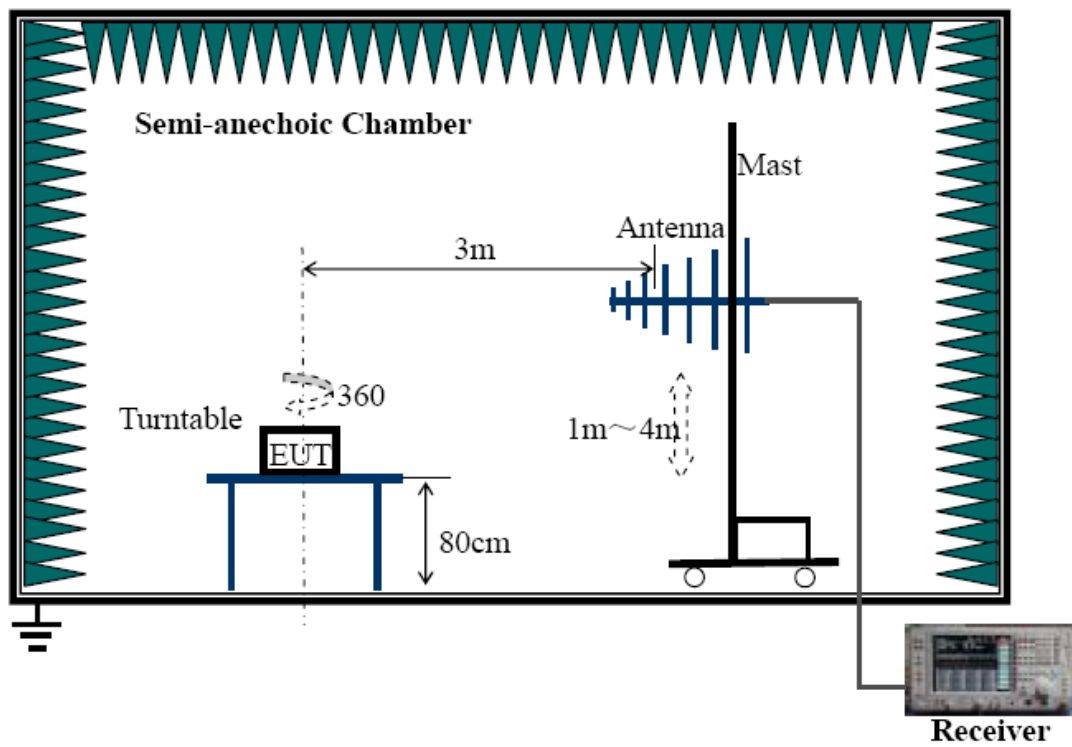

EUT Sample Photos of 2022




Front View




Rear View




Uncovered #1

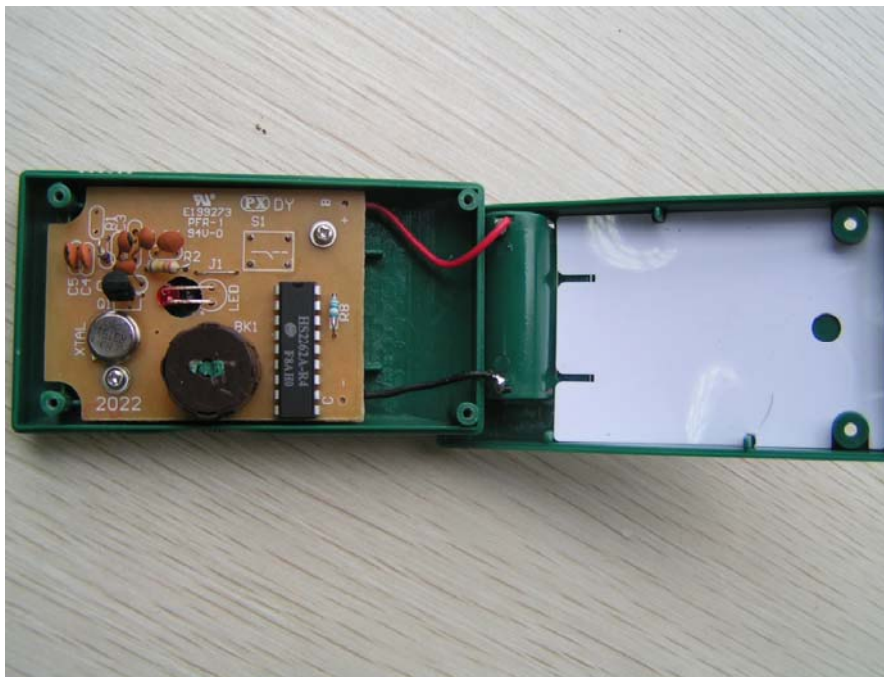


Uncovered #2

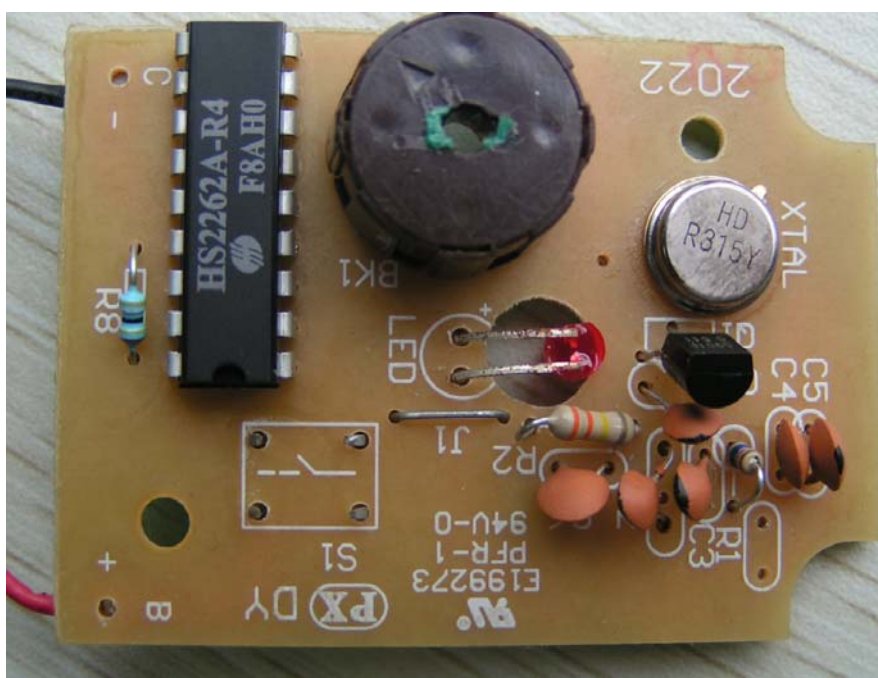

Main Board Front View

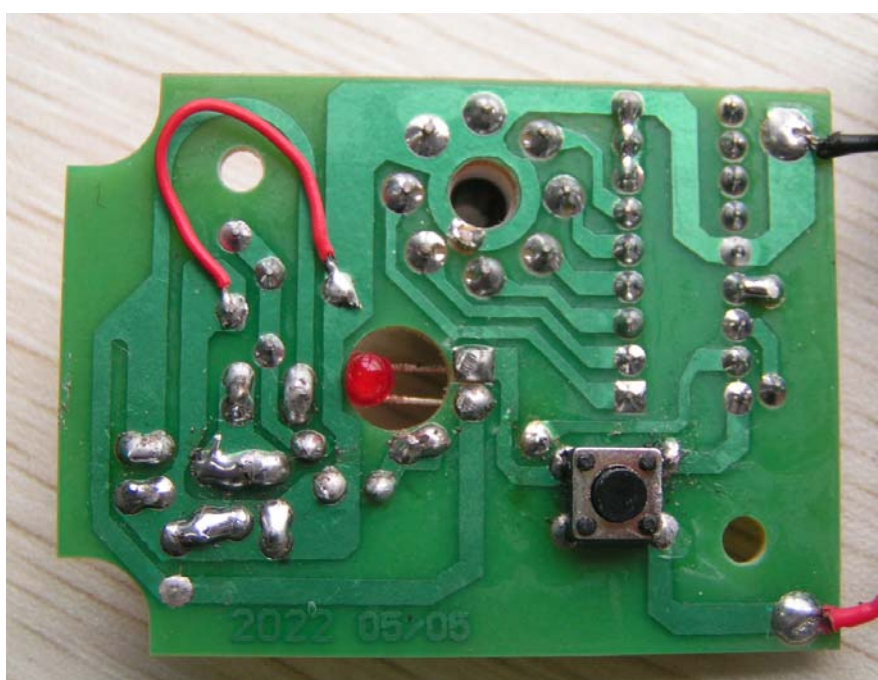

Main Board Back View

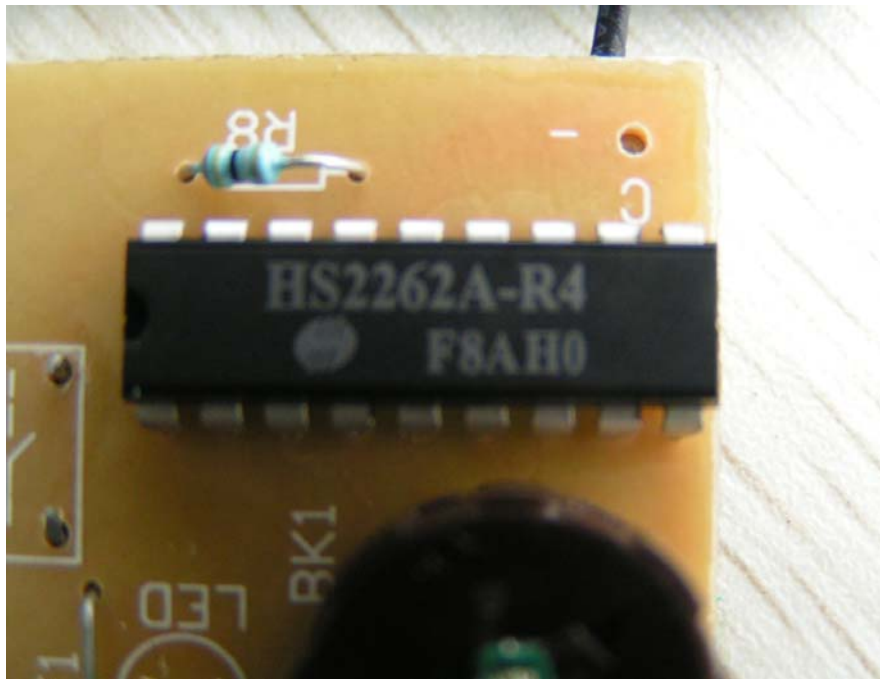


Main Chip View

ATTACHMENT 1 - ANTENNA REQUIREMENT

CLIENT:	NINGBO ALL-RF ELECTRONIC CO., LTD.	TEST STANDARD:	FCC Part 15.203 (2006)
MODEL NUMBER:	2022	PRODUCT:	Remote Control Switch
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	21 °C	HUMIDITY:	55%RH
ATM PRESSURE:	101.8 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2006, May 31
SETUP METHOD:	N/A		
ANTENNA REQUIREMENT:	An intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.		
TEST VOLTAGE:	12V DC (1*12V alkaline battery)		
TEST STATUS:	Normal Operation As Usual		
RESULTS:	The EUT meets the Antenna requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	N/A		

<i>FCC Section</i>	<i>FCC Rules</i>	<i>Conclusion</i>
15.203	<i>Described how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.</i> <i>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</i> <i>● The application (or intended use) of the EUT</i> <i>● The installation requirements of the EUT</i> <i>● The method by which the EUT will be marketed</i>	<i>The RF Device uses an integral antenna without connector.</i>

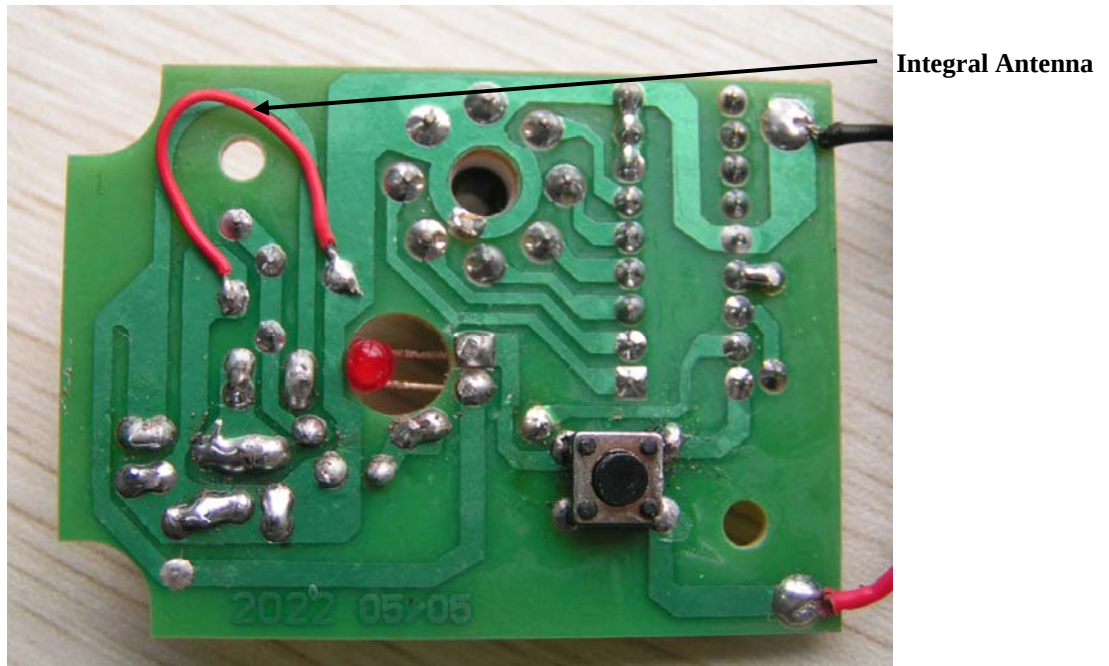

Integral Antenna without Connector View


ATTACHMENT 2 – RESTRICTED BAND OF OPERATION

CLIENT:	NINGBO ALL-RF ELECTRONIC CO., LTD.	TEST STANDARD:	FCC 15.205 (2006)
MODEL NUMBER:	2022	PRODUCT:	Remote Control Switch
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	21 °C	HUMIDITY:	55%RH
ATM PRESSURE:	101.6 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2006, May 31
SETUP METHOD:	ANSI C63.4 - 2003		
RESTRICTED BANDS OF OPERATION REQUIREMENT:	The only spurious emissions are permitted in any of the frequency bands listed below table of next page.		
TESTED RANGE:	30MHz to 5000MHz		
TEST VOLTAGE:	12VDC (1*12V alkaline battery)		
TEST STATUS:	Keep Tx in continuous transmission mode, modulated		
RESULTS:	The EUT meets the restricted bands of operation requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


² Above 38.6

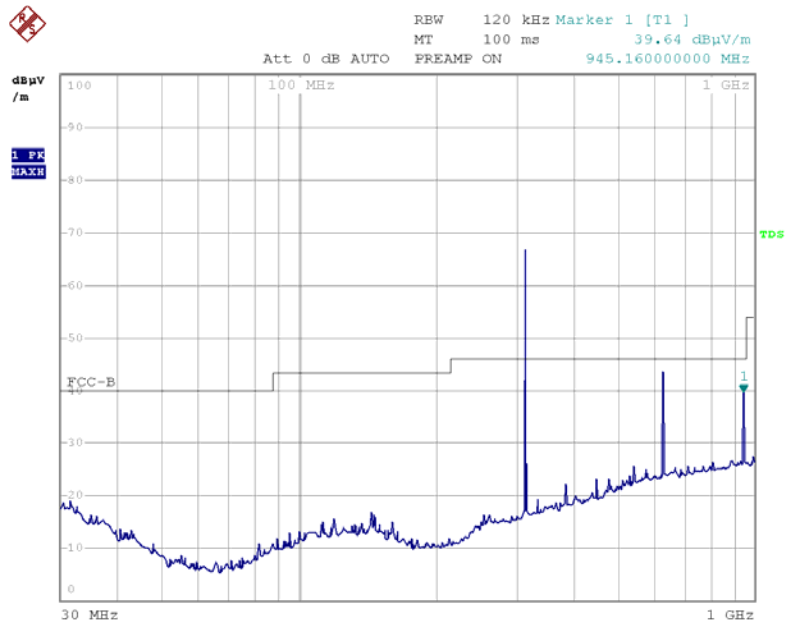

ABC

Date: 31.MAY.2006 12:49:58

Test Data (Below 1GHz)

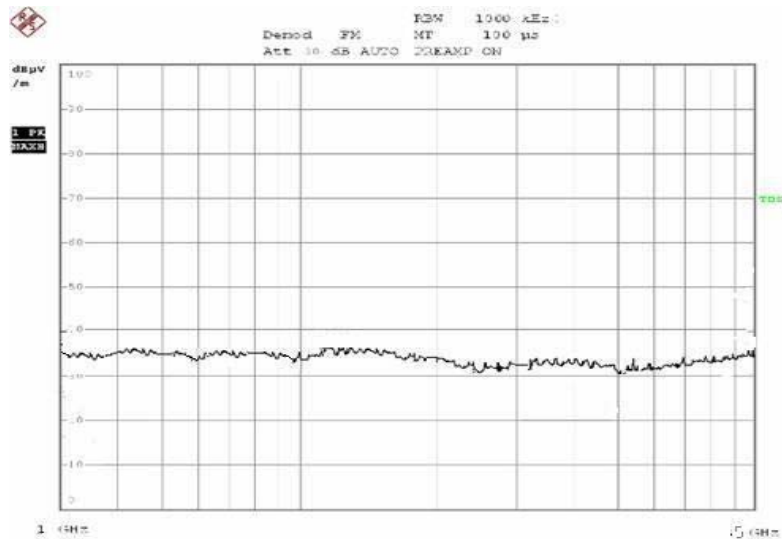


Test Data (Above 1GHz)


Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4440A	US45303119	03/20/06	03/19/07
Bilog Antenna	CHASE	CBL6112	117.0800.20	02/17/06	02/16/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	513	02/10/06	02/09/07
Anechoic Chamber	LINDGREN	FACT-3	601	01/10/06	01/10/07
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Shi-xiting
ENGINEER

REVIEWED BY: Hanyuan
SENIOR ENGINEER

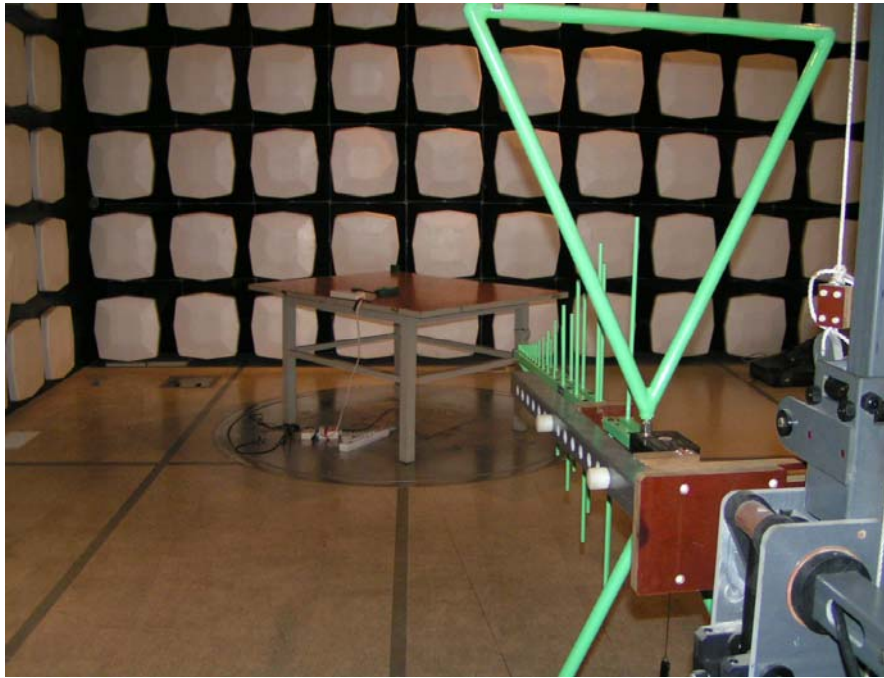

Radiated Emissions Test Set-up (Below 1GHz)

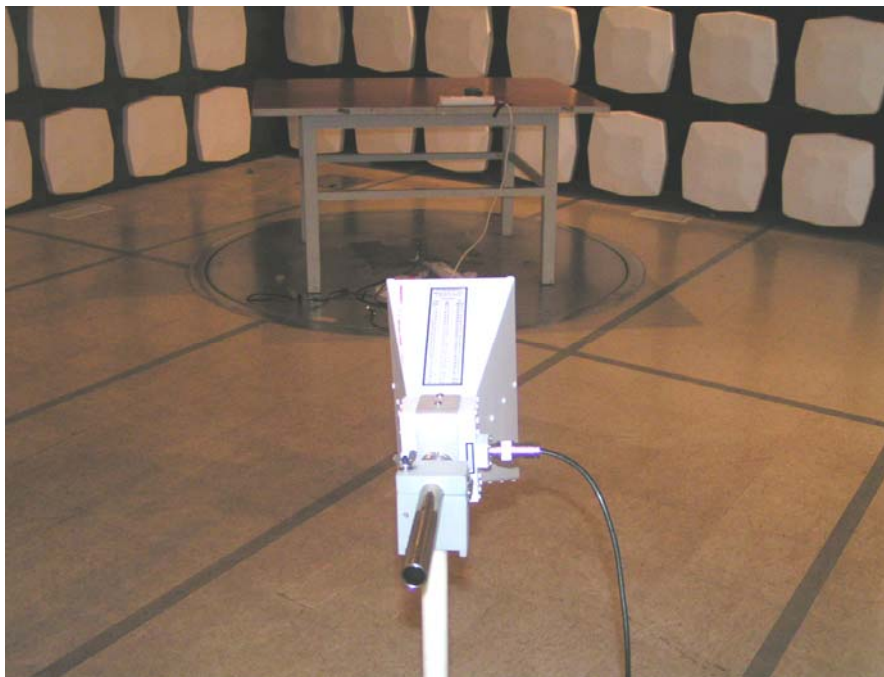

Radiated Emissions Test Set-up (Above 1GHz)

ATTACHMENT 3 – OPERATION MODE

CLIENT:	NINGBO ALL-RF ELECTRONIC CO., LTD.	TEST STANDARD:	FCC Part 15.231 (a) (2006)
MODEL NUMBER:	2022	PRODUCT:	Remote Control Switch
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	21 °C	HUMIDITY:	55%RH
ATM PRESSURE:	101.8 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2006, May 31
SETUP METHOD:	N/A		
OPERATION MODE REQUIREMENT:	(1) A manually operated transmitter shall employ a switch that will automatically the transmitter within not more than 5 seconds of being released. (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation. (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used on security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour. (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.		
TEST VOLTAGE:	12VDC (1*12V alkaline battery)		
TEST STATUS:	Normal Operation As Usual		
RESULTS:	The EUT meets the operation mode requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	N/A		

FCC Section	FCC Rules	Conclusion
15.231 (a)	<i>The provisions of this Section are restricted to periodic operation within the band 40.66 – 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of 15.231 Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:</i> <i>(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released</i> <i>(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.</i> <i>(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used on security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.</i> <i>(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety</i>	<i>The transmitter operates manually and employs a switch that automatically deactivates the transmitter and ceases transmission within 5 seconds after deactivation.</i> <i>The transmitter does not perform periodic transmissions.</i>

	<i>of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.</i>	
--	--	--

ATTACHMENT 4 –FIELD STRENGTH OF FUNDAMENTAL AND SPURIOUS EMISSIONS

CLIENT:	NINGBO ALL-RF ELECTRONIC CO., LTD.	TEST STANDARD:	FCC Part 15.231(b), FCC Part 15.35
MODEL NUMBER:	2022	PRODUCT:	Remote Control Switch
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	21°C	HUMIDITY:	53%RH
ATM PRESSURE:	101.6 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2006, May 31
SETUP METHOD:	ANSI C63.4 : 2003, FCC Part 15.35		
TEST PROCEDURE:	a. The EUT was placed on a rotatable table with 0.8 meters above ground. b. The EUT was set 3 meters from the interference-receiving antenna, which was mounted on the top of a variable height antenna tower. c. The antenna was varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna were set to make measurement. d. For each suspected emission the EUT was arranged to its worst case and then change the antenna tower height (from 1m to 4m) and turn table (from 0 degree to 360 degree) to find the maximum reading. e. If the emission level of the EUT in peak mode was 20 dB lower than the specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be tested using the quasi-peak method in about six maximal points and the results will be reported. f. Broadband antenna (Calibrated antenna) was used as receiving antenna below 1000MHz. Horn antenna were used as receiving antenna above 1000MHz. g. The bandwidth is 120 kHz below 1000 MHz, and 1 MHz above 1000 MHz Explanation of the Correction Factor are given as follows: $FS = RA + AF + CF - AG - DC$ Where: FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Attenuation Factor AG = Amplifier Gain DC = Duty Cycle Correction Factor		

CONTINUE ON THE NEXT PAGE...

TESTED RANGE:	30MHz to 5000MHz
TEST VOLTAGE:	12VDC (1*12V alkaline battery)
TEST STATUS:	Keep Tx in continuous transmission mode, modulated
RESULTS:	The EUT meets the requirements of field strength test. The test results only to the equipment under test provided by client.
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB

Average value of the measured emissions:

Direction	Polarization	Frequency Type	Frequency (MHz)	Field Strength dB(μV/m)	Limit dB(μV/m)	Over Limit dB(μV/m)	Read Level dB(μV)	Factor (dB)	Duty cycle Correction Factor (dB)
Lie	Horizontal	Fundamental	315.08	55.82	75.63	-19.81	74.10	-5.73	12.55
		Spurious	630.16	39.12	55.63	-16.51	59.07	-7.40	12.55
		Spurious	945.24	33.41	55.63	-22.22	47.05	-1.09	12.55
		Spurious	1260.32	34.28	55.63	-21.35	43.96	2.87	12.55
		Spurious	1575.39	36.02	55.63	-19.61	47.84	0.73	12.55
		Spurious	1890.45	31.09	55.63	-24.54	42.75	0.89	12.55
	Vertical	Fundamental	315.08	66.35	75.63	-9.28	84.63	-5.73	12.55
		Spurious	630.16	49.65	55.63	-5.98	69.60	-7.40	12.55
		Spurious	945.24	40.42	55.63	-15.21	54.06	-1.09	12.55
		Spurious	1260.32	34.09	55.63	-21.54	43.77	2.87	12.55
		Spurious	1575.39	35.02	55.63	-20.61	46.84	0.73	12.55
		Spurious	1890.45	32.38	55.63	-23.25	44.04	0.89	12.55
Stand	Horizontal	Fundamental	315.08	63.91	75.63	-11.72	82.19	-5.73	12.55
		Spurious	630.16	38.02	55.63	-17.61	57.97	-7.40	12.55
		Spurious	945.24	31.78	55.63	-23.85	45.42	-1.09	12.55
		Spurious	1260.32	30.88	55.63	-24.75	40.56	2.87	12.55
		Spurious	1575.39	28.91	55.63	-26.72	40.73	0.73	12.55
		Spurious	1890.45	29.01	55.63	-26.62	40.67	0.89	12.55
	Vertical	Fundamental	315.08	62.80	75.63	-12.83	81.08	-5.73	12.55
		Spurious	630.16	39.52	55.63	-16.11	59.47	-7.40	12.55
		Spurious	945.24	36.89	55.63	-18.74	50.53	-1.09	12.55
		Spurious	1260.32	34.44	55.63	-21.19	44.12	2.87	12.55
		Spurious	1575.39	33.90	55.63	-21.73	45.72	0.73	12.55
		Spurious	1890.45	32.19	55.63	-23.44	43.85	0.89	12.55

Peak value of the measured emissions:

Direction	Polarization	Frequency Type	Frequency (MHz)	Read Level dB(μV)	Factor (dB)	Field Strength dB(μV/m)	Limit dB(μV/m)	Over Limit dB(μV/m)
Lie	Horizontal	Fundamental	315.08	74.10	-5.73	68.37	95.63	-27.26
		Spurious	630.16	59.07	-7.40	51.67	75.63	-23.96
		Spurious	945.24	47.05	-1.09	45.96	75.63	-29.67
		Spurious	1260.32	43.96	2.87	46.83	75.63	-28.8
		Spurious	1575.39	47.84	0.73	48.57	75.63	-27.06
		Spurious	1890.45	42.75	0.89	43.64	75.63	-31.99
	Vertical	Fundamental	315.08	84.63	-5.73	78.9	95.63	-16.73
		Spurious	630.16	69.60	-7.40	62.2	75.63	-13.43
		Spurious	945.24	54.06	-1.09	52.97	75.63	-22.66
		Spurious	1260.32	43.77	2.87	46.64	75.63	-28.99
		Spurious	1575.39	46.84	0.73	47.57	75.63	-28.06
		Spurious	1890.45	44.04	0.89	44.93	75.63	-30.7
Stand	Horizontal	Fundamental	315.08	82.19	-5.73	76.46	95.63	-19.17
		Spurious	630.16	57.97	-7.40	50.57	75.63	-25.06
		Spurious	945.24	45.42	-1.09	44.33	75.63	-31.3
		Spurious	1260.32	40.56	2.87	43.43	75.63	-32.2
		Spurious	1575.39	40.73	0.73	41.46	75.63	-34.17
		Spurious	1890.45	40.67	0.89	41.56	75.63	-34.07
	Vertical	Fundamental	315.08	81.08	-5.73	75.35	95.63	-20.28
		Spurious	630.16	59.47	-7.40	52.07	75.63	-23.56
		Spurious	945.24	50.53	-1.09	49.44	75.63	-26.19
		Spurious	1260.32	44.12	2.87	46.99	75.63	-28.64
		Spurious	1575.39	45.72	0.73	46.45	75.63	-29.18
		Spurious	1890.45	43.85	0.89	44.74	75.63	-30.89

Note:

- Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follow:

For fundamental frequency ($F=315.08\text{MHz}$)

Average field Strength of Fundamental (dBuV/m)

$$=20\log(41.6667 \times F - 7083.3333)$$

$$=20\log(41.6667 \times 315.08 - 7083.3333)$$

$$=75.63 \text{ dBuV/m}$$

$$\text{Average field Strength of Spurious (dBuV/m)} = 75.63 - 20 = 55.63 \text{ dBuV/m}$$

According to FCC 15.35(b), maximum permitted peak field strength is 20dB above the maximum permitted average emission limit.

- Field Strength = Read Level + Factor – Duty Cycle Correction Factor

Factor = Antenna Factor + Cable Loss - Preamp Factor

Duty Cycle Correction Factor is calculated by averaging the sum of the pulse train.

Correction factor is measured as follows:

EMC Test Report #: NIN-0604-0416SH-FCC

Prepared for NINGBO ALL-RF ELECTRONIC CO., LTD.


Prepared by EMC Compliance Management Group

Keep the EUT in continuous transmission mode (modulated), and set the spectrum to the fundamental frequency and set the span width to 0 Hz. Then connect a storage oscilloscope to the video output of the spectrum that is used to detect the pulse train. Adjust the oscilloscope settings to observe the pulse train and determine the number and width of the pulses, as well as the period of the train.


Duty Cycle Correction Factor at its maximum value

$$\begin{aligned} \text{Duty Cycle} &= 20 \log(5 * \text{Pulse 1} + 5 * \text{Pulse 2} + 15 * \text{Pulse 3}) / \text{Period} \\ &= 20 \log(5 * 0.6583 + 5 * 0.1895 + 15 * 0.1833) / 29.65 \\ &= 20 \log 0.2357 = 12.55 \text{ dB} \end{aligned}$$


(please refer to the following test graph below)

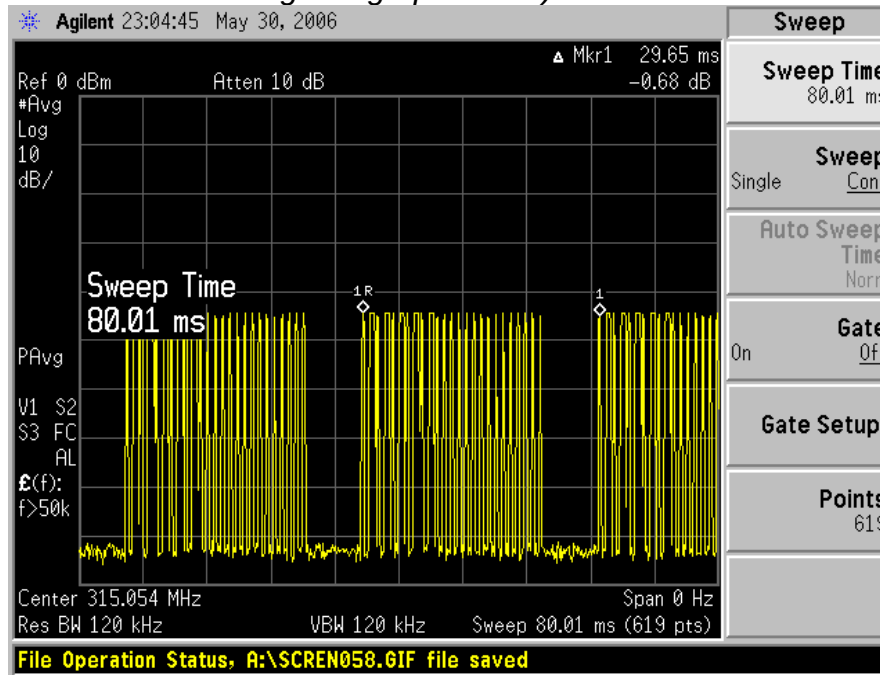


Period=29.65ms

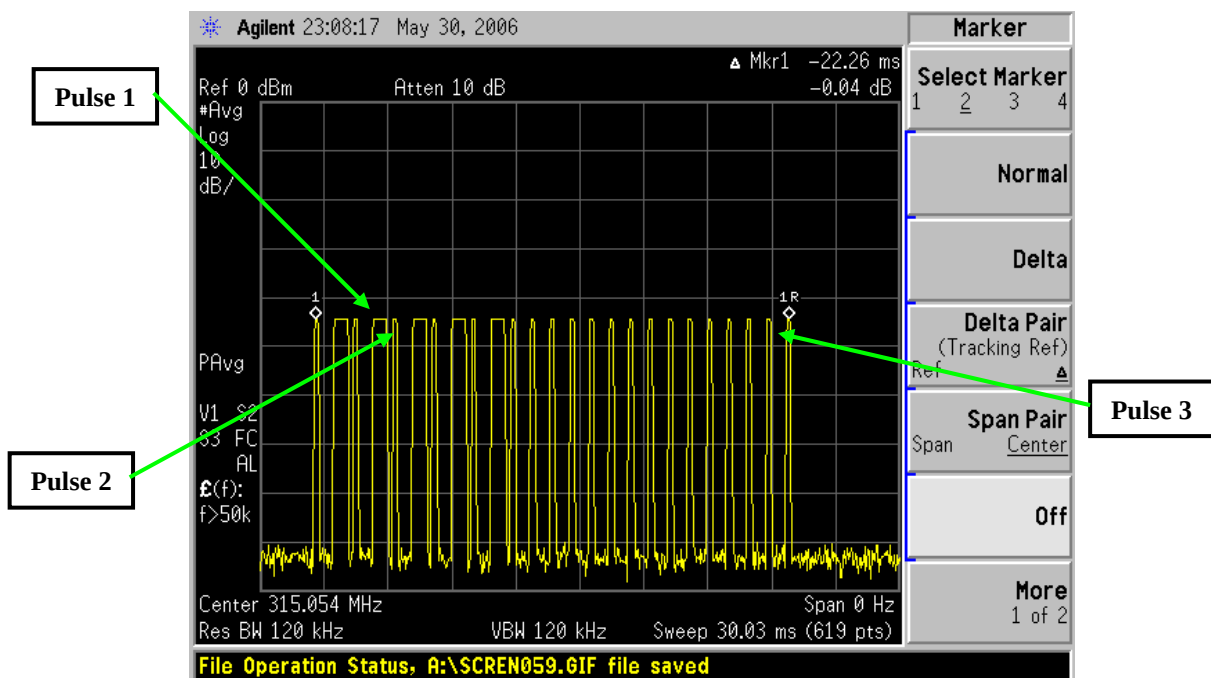


Pulse detail

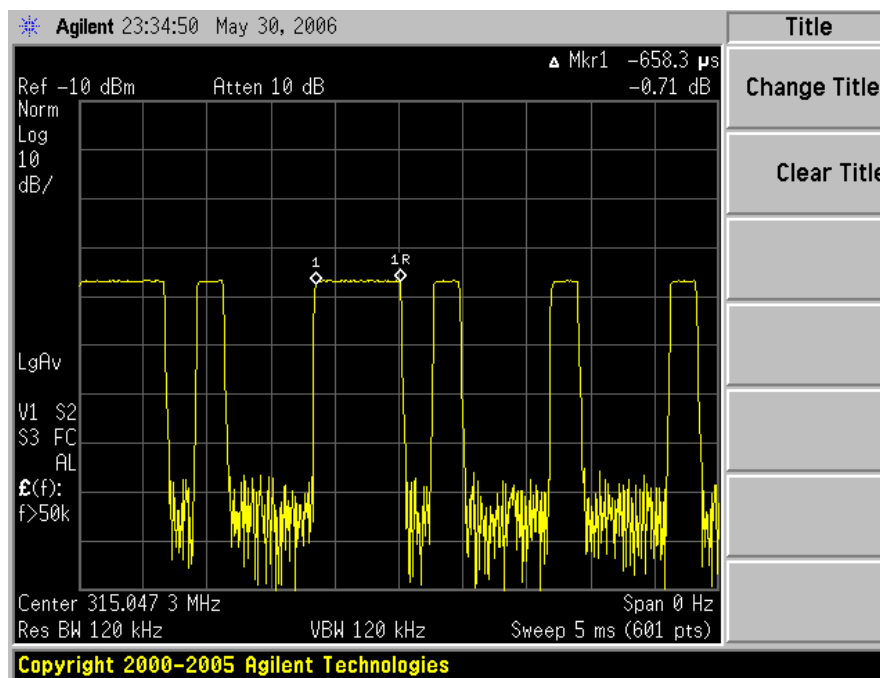

Pulse 1=658.3us

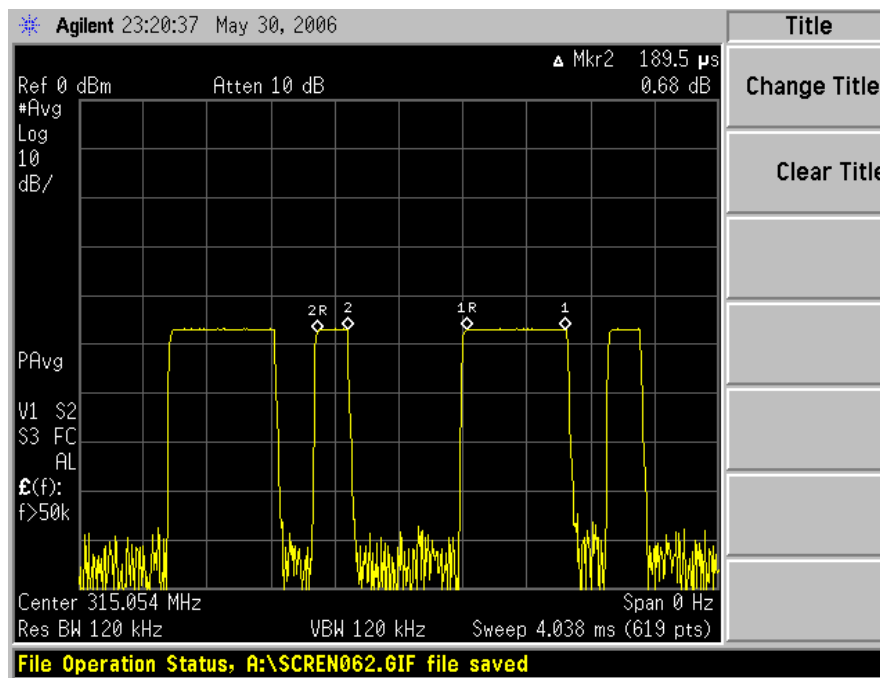

Pulse 2=189.5us

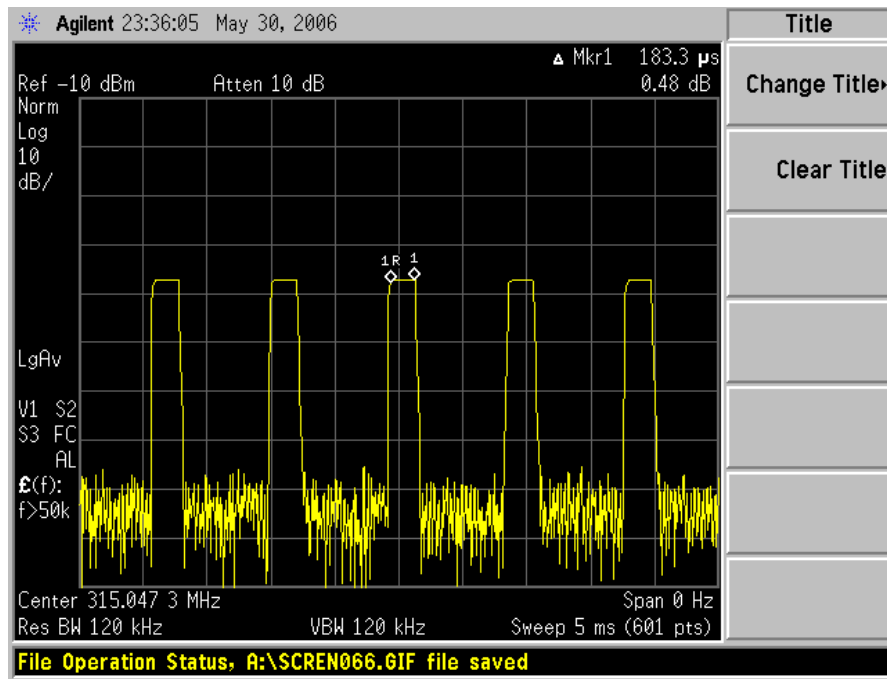


Pulse3=183.3us


Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4440A	US45303119	03/20/06	03/19/07
Bilog Antenna	CHASE	CBL6112	117.0800.20	02/17/06	02/16/07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120 D	513	02/10/06	02/09/07
Anechoic Chamber	LINDGREN	FACT-3	601	01/10/06	01/09/07
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Shi-xiting
ENGINEER


REVIEWED BY: Hangzhan
SENIOR ENGINEER

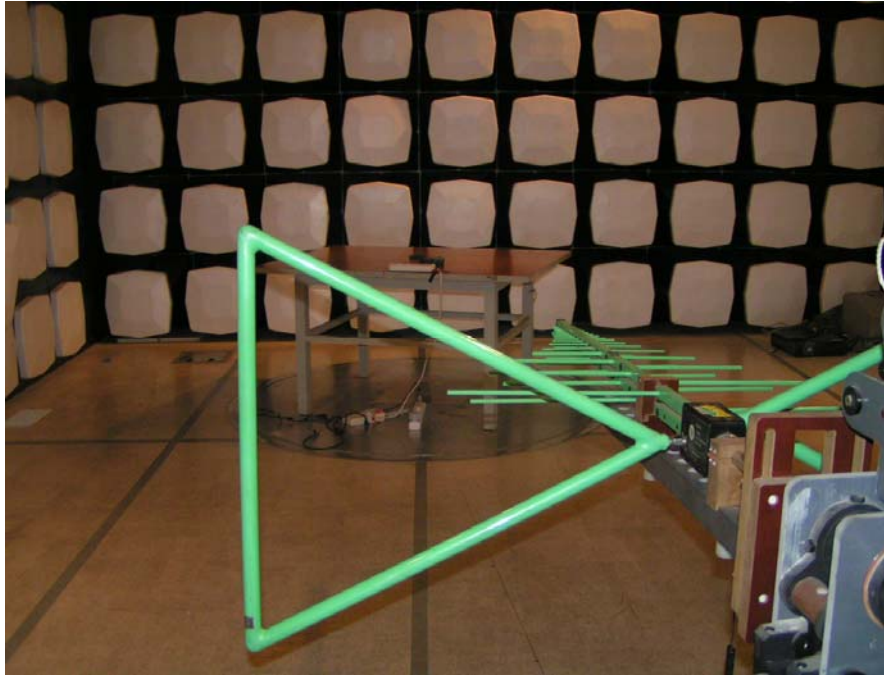

Field Strength Emissions Test Set-up - Front View (Below 1GHz)

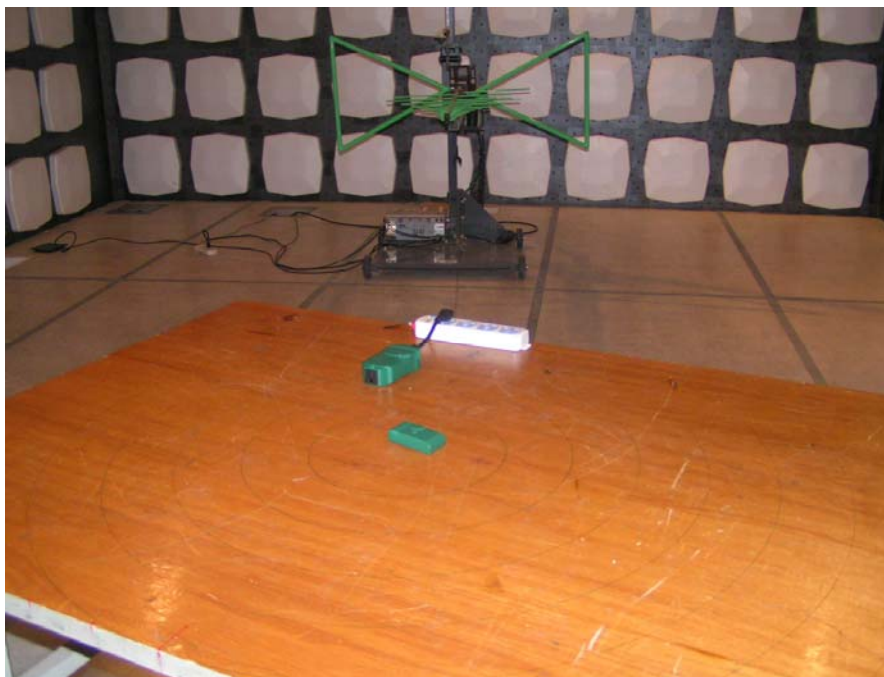

Field Strength Emissions Test Set-up - Rear View (Below 1GHz)

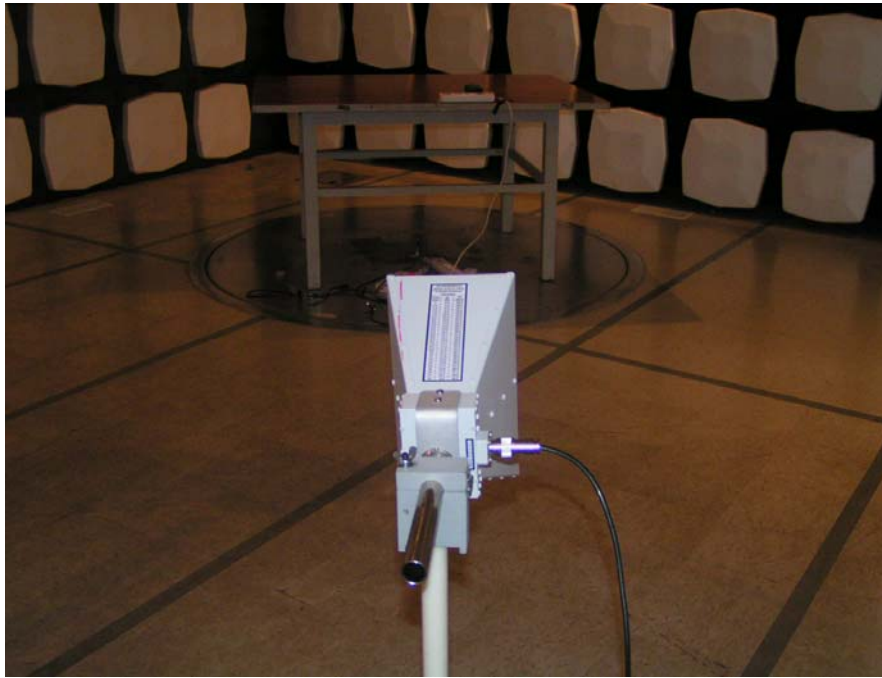

Field Strength Emissions Test Set-up – Front View (Above 1GHz)




Field Strength Emissions Test Set-up – Rear View (Above 1GHz)


ATTACHMENT 5 – BANDWIDTH TEST

CLIENT:	NINGBO ALL-RF ELECTRONIC CO., LTD.	TEST STANDARD:	FCC Part 15.231 (C)
MODEL TESTED:	2022	PRODUCT:	Remote Control Switch
SERIAL NO.:	Engineering Sample	EUT DESIGNATION:	RF Equipment
TEMPERATURE:	21 °C	HUMIDITY:	53%RH
ATM PRESSURE:	101.6 kPa	GROUNDING:	No Grounding
TESTED BY:	Shi Xiting	DATE OF TEST:	2006, May 31
SETUP METHOD:	ANSI C63.4 - 2003		
BANDWIDTH REQUIREMENT:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, The emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.		
TEST VOLTAGE:	12VDC (1*12V alkaline battery)		
TEST STATUS:	Keep Tx in continuous transmission mode, modulated		
RESULTS:	The EUT meets the bandwidth requirement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by EMC Compliance Management Group (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

Test Data (Fundamental Frequency)

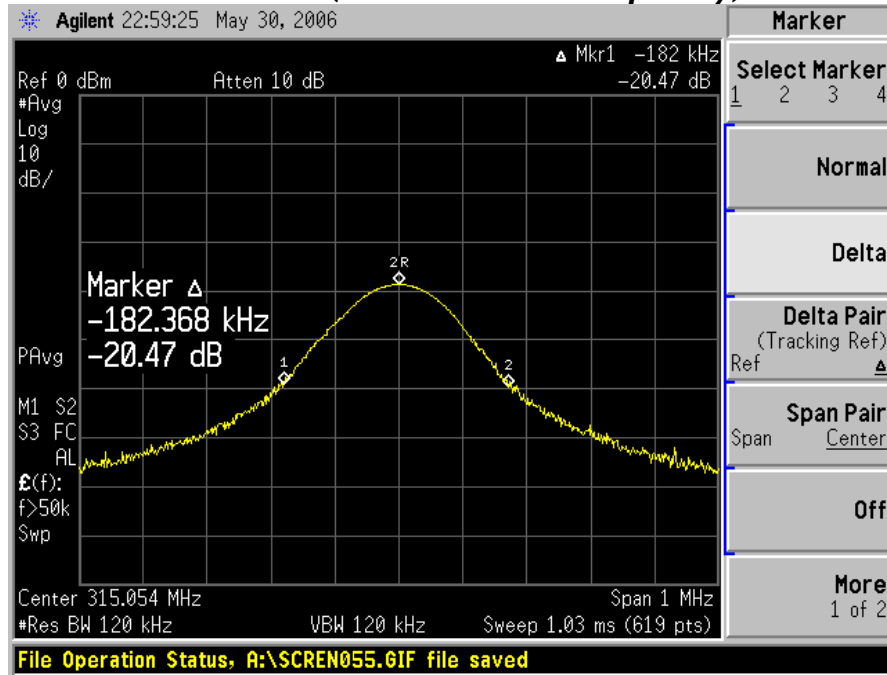

Left 20dB

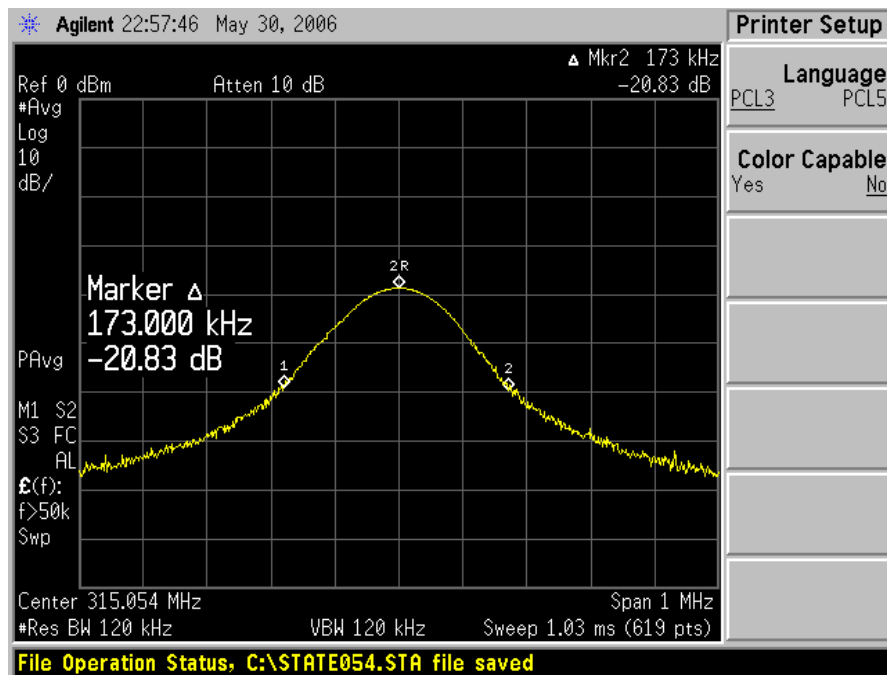

Right 20dB


So, 20dB Bandwidth = 182kHz + 173kHz = 355kHz

Frequency (MHz)			Bandwidth Limit (MHz) ($F_{center} \times 0.25\%$)	Test Result (MHz) ($F_{end}-F_{start}$)	Conclusion
<i>Start</i>	<i>Center</i>	<i>End</i>			
314.872	315.054	315.227	0.7876	0.355	Compliance

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4440A	US45303119	03/20/06	03/19/07
Bilog Antenna	CHASE	CBL6112	117.0800.20	02/17/06	02/16/07
Anechoic Chamber	FACT-3	LINDGREN	601	01/10/06	01/09/07
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.					

SIGNED BY: Shi-xiting
ENGINEER

REVIEWED BY: Hanyuan
QC

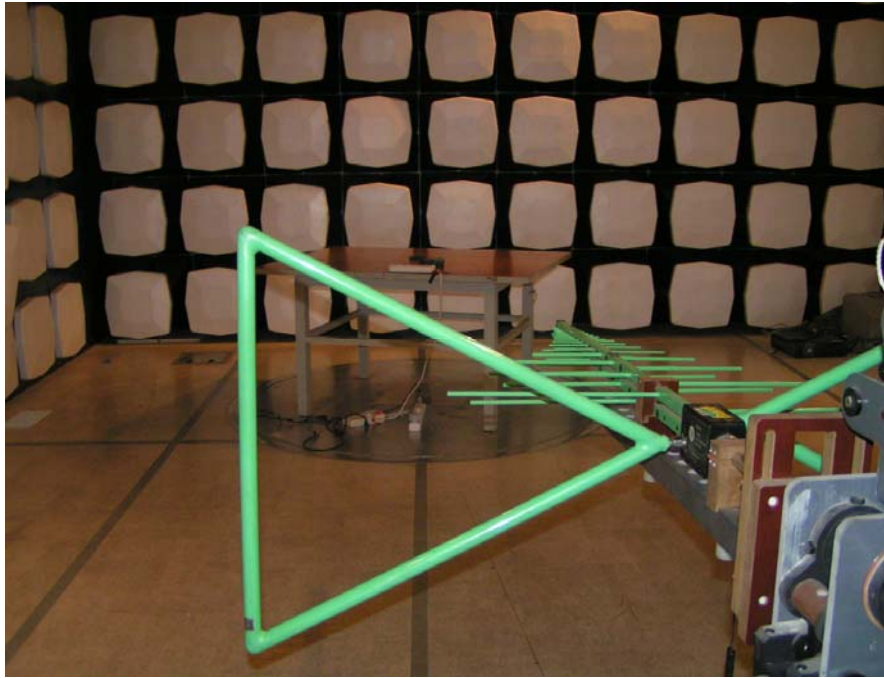

Bandwidth Test Set-up