

FCC REPORT

Applicant: Deliberant LLC

Address of Applicant: 138 Mountain Brook Dr Canton, GA 30115 United States

Equipment Under Test (EUT)

Product Name: Broadband Digital Transmission System

Model No.: DLB 5-15

FCC ID: UB8-DLB515

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 18 Jun., 2014

Date of Test: 18 Jun., to 26 Aug., 2014

Date of report issued: 26 Aug., 2014

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	26 Aug., 2014	Original

Prepared by:

Sera Xiang

Date:

26 Aug., 2014

Report Clerk

Reviewed by:

Wimer Zhang

Date:

26 Aug., 2014

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 LABORATORY FACILITY.....	7
5.5 LABORATORY LOCATION	7
5.6 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 JUSTIFICATION	9
6.2 ANTENNA REQUIREMENT	9
6.3 CONDUCTED EMISSION	10
6.4 CONDUCTED OUTPUT POWER	15
6.5 6dB EBW AND 99% OBW	23
6.6 POWER SPECTRAL DENSITY	29
6.7 BAND EDGE	38
6.7.1 Conducted Emission Method.....	38
6.7.2 Radiated Emission Method.....	42
6.8 SPURIOUS EMISSION	44
6.8.1 Conducted Emission Method.....	44
6.8.2 Radiated Emission Method.....	61
7 TEST SETUP PHOTO	70
8 EUT CONSTRUCTIONAL DETAILS	71

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Deliberant LLC
Address of Applicant:	138 Mountain Brook Dr Canton, GA 30115 United States
Manufacturer/ Factory:	Deliberant LLC
Address of Manufacturer/ Factory:	138 Mountain Brook Dr Canton, GA 30115 United States

5.2 General Description of E.U.T.

Product Name:	Broadband Digital Transmission System
Model No.:	DLB 5-15
Operation Frequency:	5745MHz-5825MHz :802.11a&802.11nHT20 ; 5755MHz-5795MHz :802.11nHT40
Operation mode:	Fixed point-to-point operation MIMO 2x2
Channel numbers:	802.11a/ 802.11n20:5, 802.11n40:2
Channel separation:	802.11a/802.11n20 :20MHz, 802.11n40 :40MHz
Modulation technology: (IEEE 802.11a)	BPSK,QPSK,16-QAM,64-QAM
Modulation technology: (IEEE 802.11n)	BPSK,QPSK,16-QAM,64-QAM
Data speed(IEEE 802.11a)	6MHz,9MHz,12MHz,18MHz,24MHz,36MHz,48MHz,54MHz
Data speed (IEEE 802.11n20):	MCS0: 6.5MHz,MCS1:13MHz,MCS2:19.5MHz,MCS3:26MHz, MCS4:39MHz,MCS5:52MHz,MCS6:58.5MHz,MCS7:65MHz
Data speed (IEEE 802.11n40):	MCS0:15MHz,MCS1:30MHz,MCS2:45MHz,MCS3:60MHz, MCS4:90MHz,MCS5:120MHz,MCS6:135MHz,MCS7:150MHz
Antenna Type:	Panel
Antenna gain:	15 dBi for each antenna
Power supply:	Adapter 1: Model: GRT-240050 Input:100-240V AC,50/60Hz 0.5A Output:24V DC MAX0.5A Adapter 2: Model: AY012E-ZF243 Input:100-240V AC,50/60Hz 0.5A Output:24V DC MAX0.5A

Operation Frequency each of channel

802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz
153	5765MHz	159	5795MHz
157	5785MHz		
161	5805MHz		
165	5825MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11a/802.11n20		802.11n40	
Channel	Frequency	Channel	Frequency
The lowest channel	5745MHz	The lowest channel	5755MHz
The middle channel	5785MHz	The Highest channel	5795MHz
The Highest channel	5825MHz		

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Continuously transmitting mode	Keep the EUT in 100% duty cycle transmitting with modulation in MIMO mode.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n20	6.5 Mbps
802.11n40	13 Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 6 Mbps for 802.11a, 6.5 Mbps for 802.11n20 and 13 Mbps for 802.11n40. All test items for 802.11a and 802.11n were performed in MIMO mode and duty cycle all above 98%, meet the requirements of KDB 558074.

5.4 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● FCC - Registration No.: 817957

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

● IC - Registration No.: 10106A-1

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● CNAS - Registration No.: CNAS L6048

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.5 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282
Fax: +86-755-23116366

5.6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	Aug. 23 2014	Aug. 23 2017
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	CCIS0002	N/A	N/A
3	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 11 2014	Aug. 10 2015
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	May 25 2014	May 24 2015
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 25 2014	May 24 2015
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2014	Mar. 29 2015
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2014	Mar. 31 2015
9	Amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2014	June 08 2015
10	Pre-amplifier (18-40GHz)	A.H System	PAM-1840	GTS219	Apr. 01 2014	Mar. 31 2015
11	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 25 2014	May. 24 2015
12	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2014	Mar. 31 2015
13	Spectrum Analyzer	HP	8564E	CCIS0150	May 24 2014	May 23 2015

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2014	June 08 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2014	May 24 2015
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2014	Mar. 31 2015
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2014	Mar. 31 2015
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data


6.1 Justification

Remark : Because all transmit signals are completely uncorrelated with each other , So Directional gain =15dBi

6.2 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)						
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> <i>This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</i>							
E.U.T Antenna:							
<i>The product is a professionally installed device which has one type of antenna for the application. The antenna information as below table:</i> <table><tr><th>Antenna No.</th><th>Antenna Type</th><th>Antenna Gain (dBi)</th></tr><tr><td>Antenna</td><td>Panel/Internal</td><td>15</td></tr></table> <i>According to above information, the antennas meet the requirements of this section. The details of antenna plots please refer to section 8 of this report.</i>		Antenna No.	Antenna Type	Antenna Gain (dBi)	Antenna	Panel/Internal	15
Antenna No.	Antenna Type	Antenna Gain (dBi)					
Antenna	Panel/Internal	15					


6.3 Conducted Emission

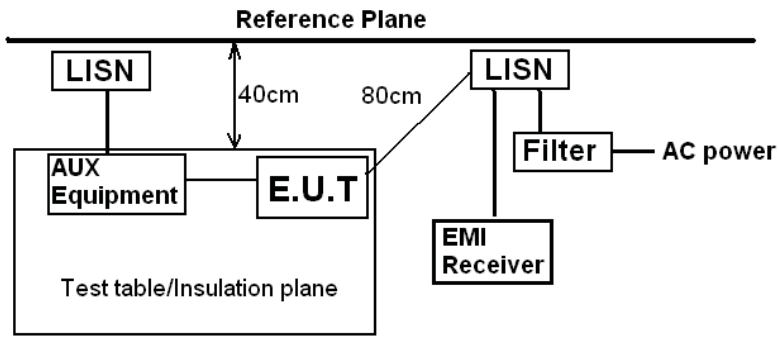Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4: 2003		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). It provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.		
Test setup:	 Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.6 for details		
Test mode:	MIMO mode		
Test results:	Passed		

Measurement Data

Adapter 1: GRT-240050

Line:

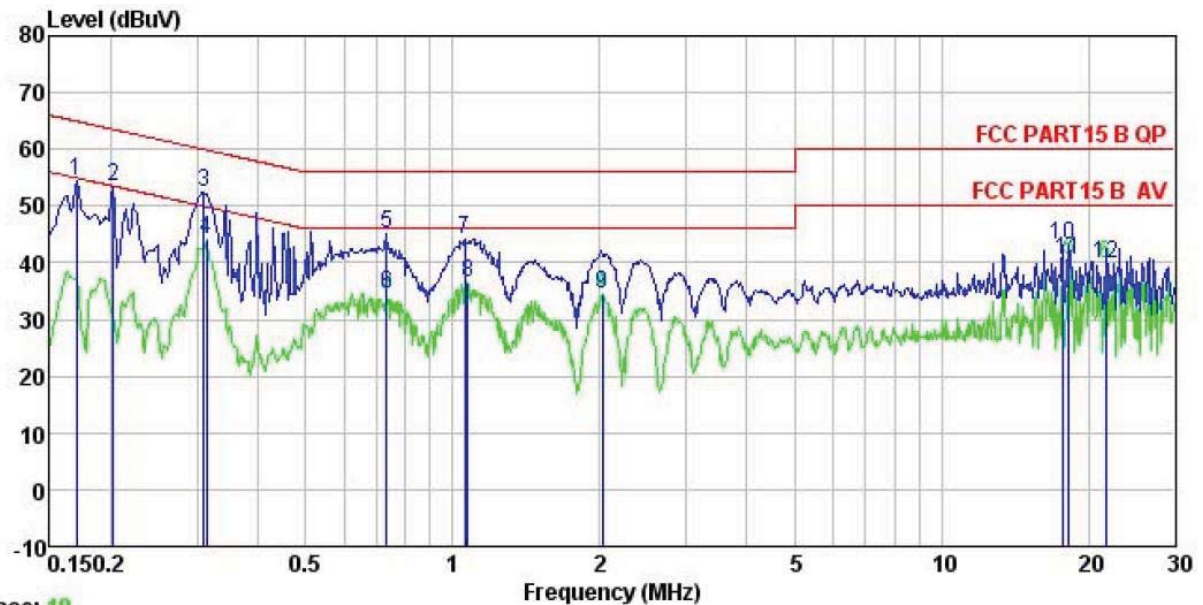


Trace: 19

Site : CCIS Shielding Room
 Condition : ICES-003 QP LISN LINE
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: GRT-240050

	Read	LISN	Cable	Limit	Over	
Freq	Level	Factor	Loss	Line	Limit	Remark
MHz	dBuV	dB	dB	dBuV	dB	
1	0.170	43.48	0.27	10.77	54.52	64.94 -10.42 QP
2	0.202	42.29	0.28	10.76	53.33	63.54 -10.21 QP
3	0.310	41.51	0.26	10.74	52.51	59.97 -7.46 QP
4	0.313	33.00	0.26	10.74	44.00	49.88 -5.88 Average
5	0.731	34.23	0.22	10.78	45.23	56.00 -10.77 QP
6	0.731	23.62	0.22	10.78	34.62	46.00 -11.38 Average
7	1.060	32.90	0.25	10.88	44.03	56.00 -11.97 QP
8	1.071	25.46	0.25	10.88	36.59	46.00 -9.41 Average
9	2.023	23.40	0.26	10.96	34.62	46.00 -11.38 Average
10	17.661	31.89	0.33	10.90	43.12	60.00 -16.88 QP
11	18.232	29.18	0.33	10.91	40.42	50.00 -9.58 Average
12	21.715	28.64	0.40	10.91	39.95	50.00 -10.05 Average

Neutral:

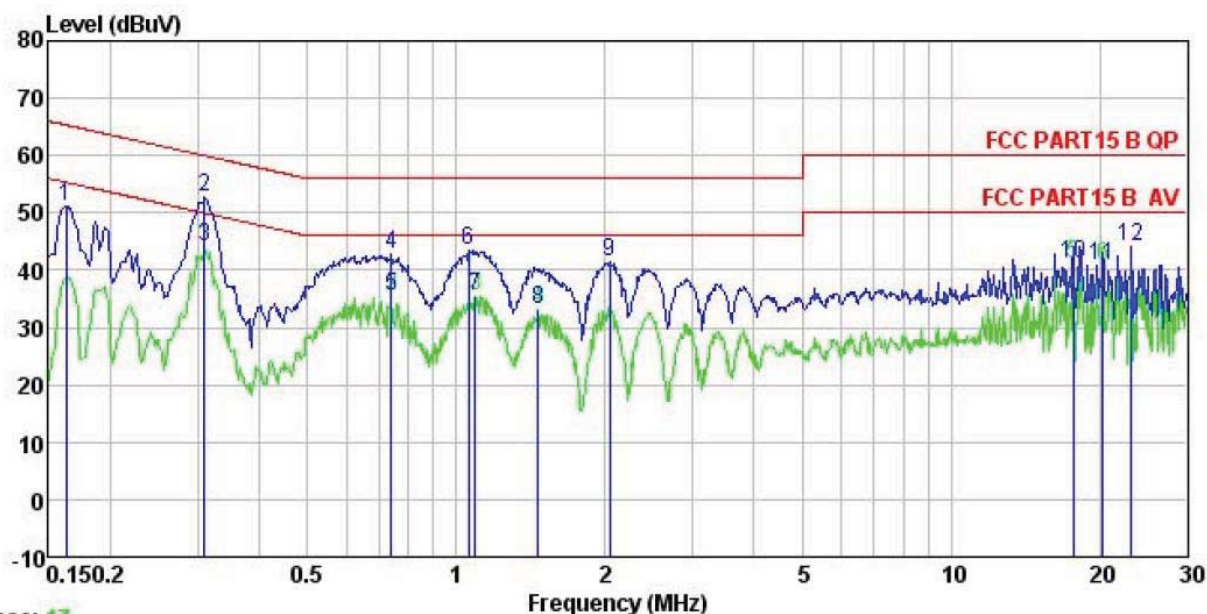

Trace: 17

Site : CCIS Shielding Room
 Condition : ICES-003 QP LISN NEUTRAL
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: GRT-240050


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	40.24	0.25	10.77	51.26	65.34	-14.08	QP
2	0.310	41.69	0.26	10.74	52.69	59.97	-7.28	QP
3	0.310	33.16	0.26	10.74	44.16	49.97	-5.81	Average
4	0.739	31.86	0.19	10.79	42.84	56.00	-13.16	QP
5	0.739	24.66	0.19	10.79	35.64	46.00	-10.36	Average
6	1.060	32.34	0.23	10.88	43.45	56.00	-12.55	QP
7	1.094	24.38	0.23	10.88	35.49	46.00	-10.51	Average
8	1.464	22.04	0.26	10.92	33.22	46.00	-12.78	Average
9	2.044	30.09	0.29	10.96	41.34	56.00	-14.66	QP
10	17.661	30.10	0.26	10.90	41.26	50.00	-8.74	Average
11	20.270	29.61	0.22	10.93	40.76	50.00	-9.24	Average
12	23.140	32.82	0.42	10.89	44.13	60.00	-15.87	QP

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

Adapter 2: AY012E-ZF243

Line:

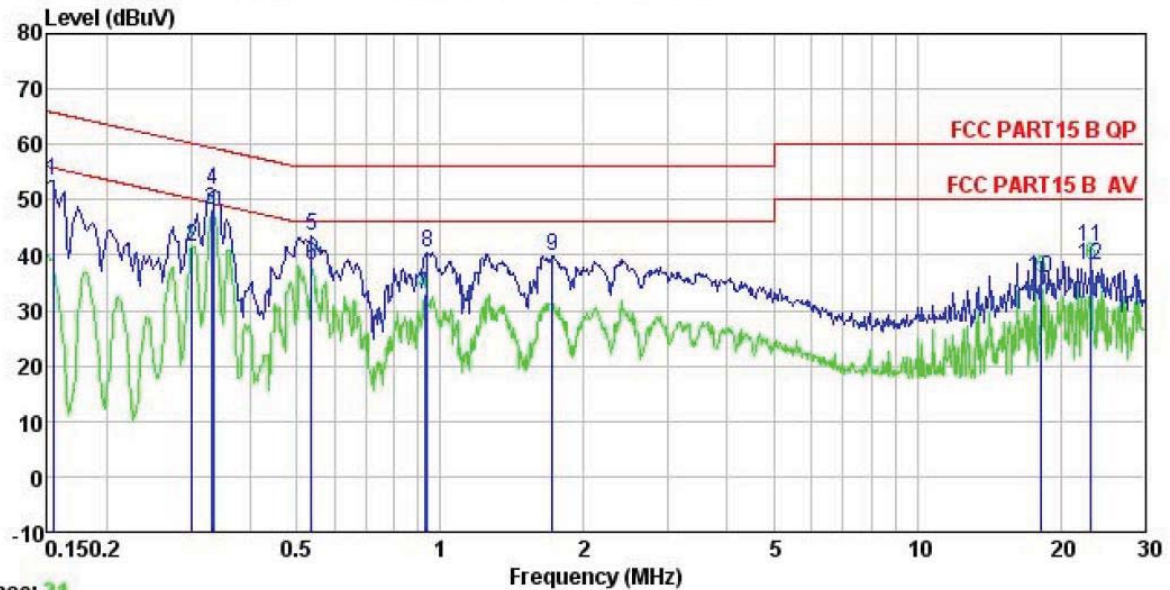


Trace: 21

Site : CCIS Shielding Room
 Condition : ICES-003 QP LISN LINE
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: AY012E-ZF243

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	dBuV	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.154	42.40	0.27	10.78	53.45	65.78	-12.33	QP
2	0.302	30.59	0.26	10.74	41.59	50.19	-8.60	Average
3	0.330	37.11	0.27	10.73	48.11	49.44	-1.33	Average
4	0.334	40.79	0.27	10.73	51.79	59.35	-7.56	QP
5	0.538	32.27	0.28	10.76	43.31	56.00	-12.69	QP
6	0.538	27.04	0.28	10.76	38.08	46.00	-7.92	Average
7	0.928	21.89	0.24	10.85	32.98	46.00	-13.02	Average
8	0.938	29.29	0.24	10.85	40.38	56.00	-15.62	QP
9	1.716	28.60	0.26	10.94	39.80	56.00	-16.20	QP
10	18.232	24.54	0.33	10.91	35.78	50.00	-14.22	Average
11	23.140	30.09	0.46	10.89	41.44	60.00	-18.56	QP
12	23.140	26.68	0.46	10.89	38.03	50.00	-11.97	Average

Neutral:

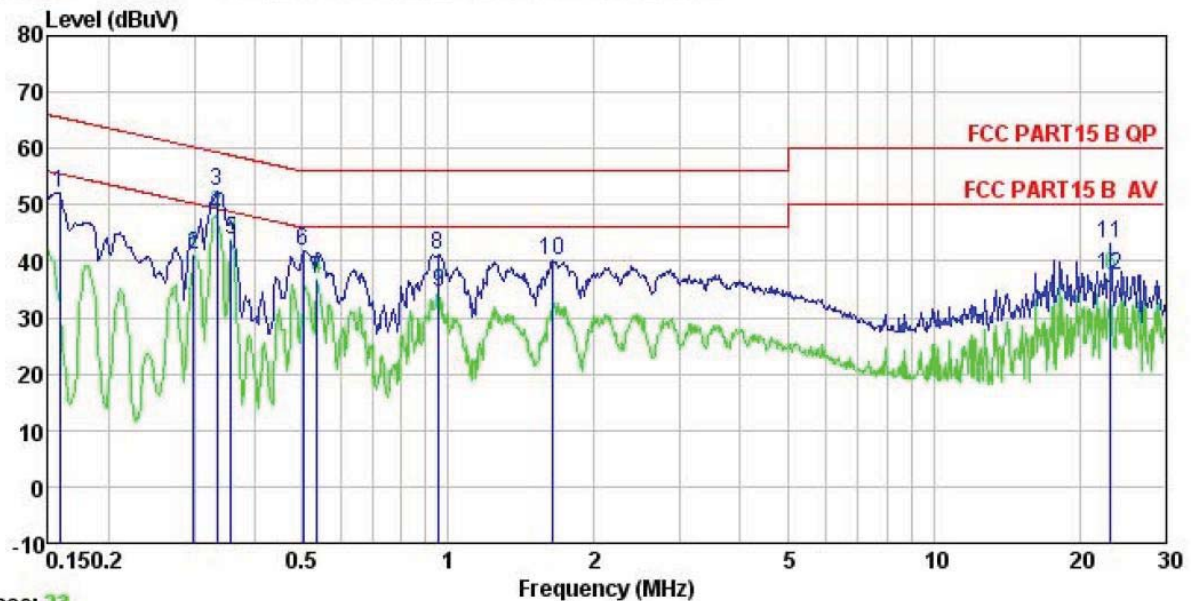

Trace: 23


Site : CCIS Shielding Room
 Condition : ICES-003 QP LISN NEUTRAL
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test Mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Winner
 Remark : POE: AY012E-ZF243

	Read	LISN	Cable	Limit	Over	
Freq	Level	Factor	Loss	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dB	dBuV	dB	
1	0.158	41.09	0.25	10.78	52.12	65.56 -13.44 QP
2	0.299	30.14	0.26	10.74	41.14	50.28 -9.14 Average
3	0.334	41.33	0.26	10.73	52.32	59.35 -7.03 QP
4	0.334	37.25	0.26	10.73	48.24	49.35 -1.11 Average
5	0.358	32.83	0.25	10.73	43.81	48.78 -4.97 Average
6	0.502	30.86	0.29	10.76	41.91	56.00 -14.09 QP
7	0.538	25.73	0.27	10.76	36.76	46.00 -9.24 Average
8	0.953	30.21	0.21	10.86	41.28	56.00 -14.72 QP
9	0.958	23.35	0.21	10.86	34.42	46.00 -11.58 Average
10	1.636	28.95	0.27	10.93	40.15	56.00 -15.85 QP
11	23.140	31.77	0.42	10.89	43.08	60.00 -16.92 QP
12	23.140	26.02	0.42	10.89	37.33	50.00 -12.67 Average

Notes:

- An initial pre-scan was performed on the live and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Cable Loss

6.4 Conducted Output Power

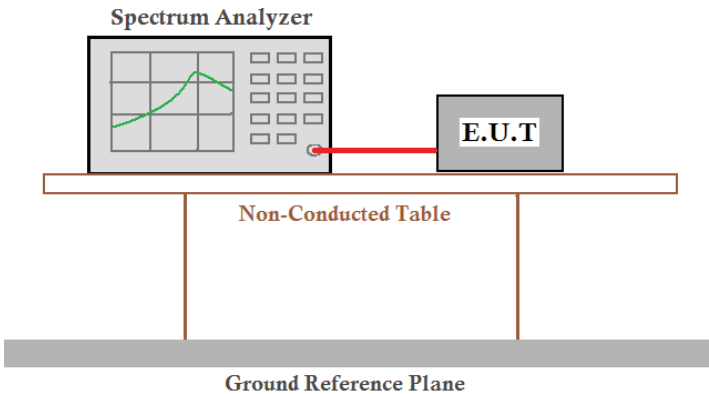Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	20.86	23.79	30.00	Pass
		TX1	20.70			
	Middle	TX0	26.80	29.63	30.00	Pass
		TX1	26.44			
	Highest	TX0	24.35	27.35	30.00	Pass
		TX1	24.33			
802.11n20	Lowest	TX0	18.79	21.70	30.00	Pass
		TX1	18.59			
	Middle	TX0	26.56	29.35	30.00	Pass
		TX1	26.11			
	Highest	TX0	24.88	27.73	30.00	Pass
		TX1	24.55			
802.11n40	Lowest	TX0	18.45	21.50	30.00	Pass
		TX1	18.52			
	Highest	TX0	25.40	28.13	30.00	Pass
		TX1	24.83			

Test plot as follows:


TX0

Test mode:

802.11a




1 RM
MAXH

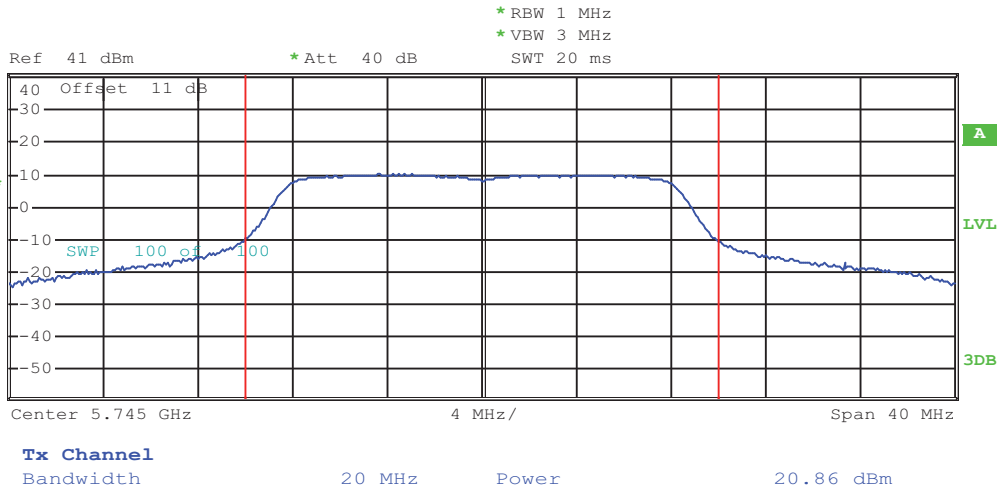

Lowest channel




1 RM
MAXH

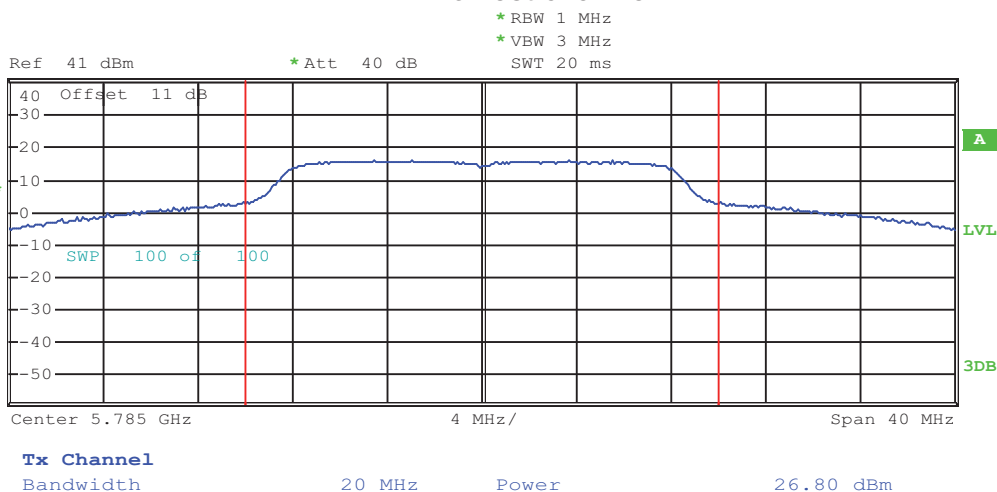

Middle channel



1 RM
MAXH



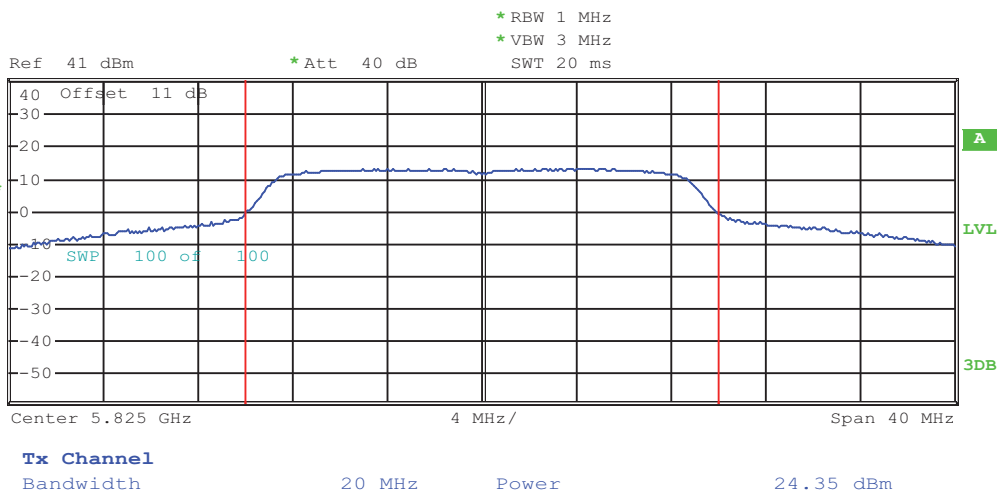


Highest channel

TX0

Test mode:

802.11n20

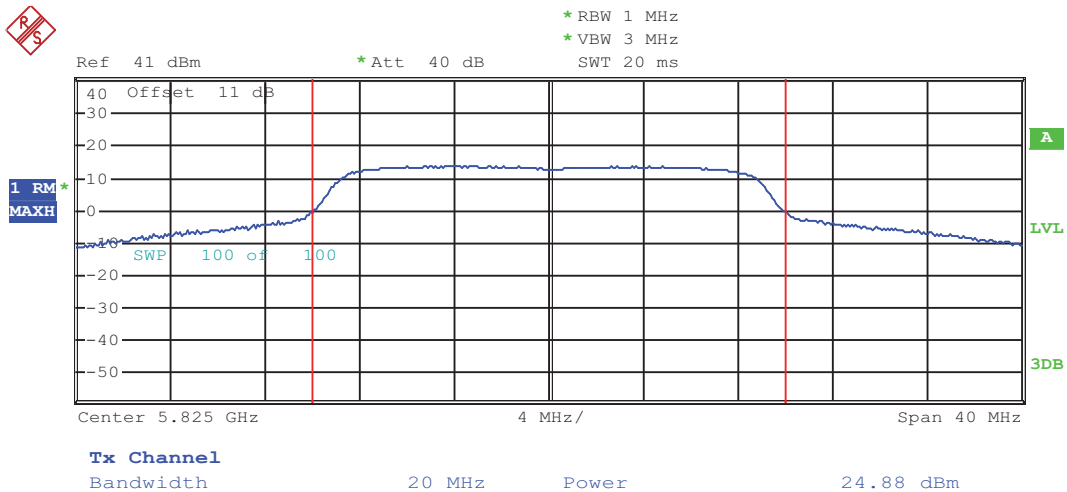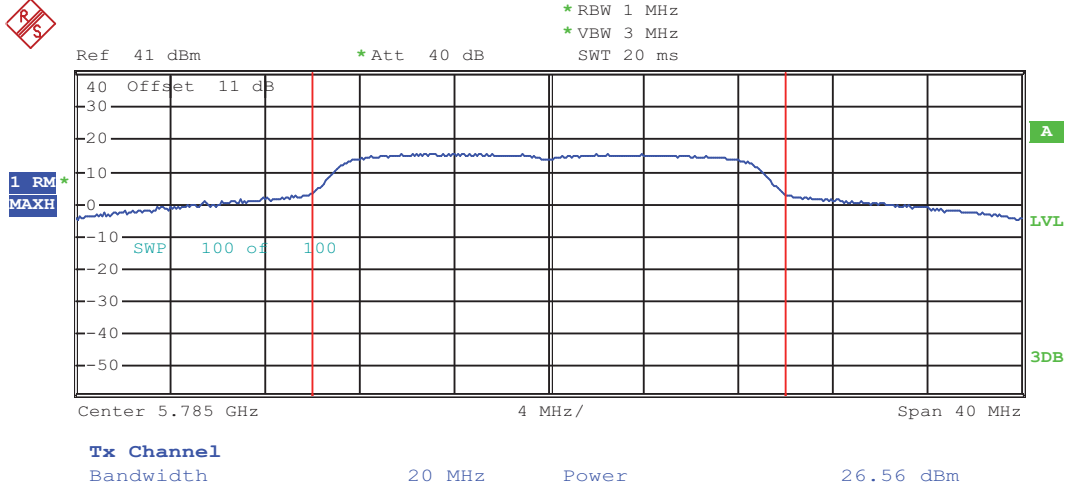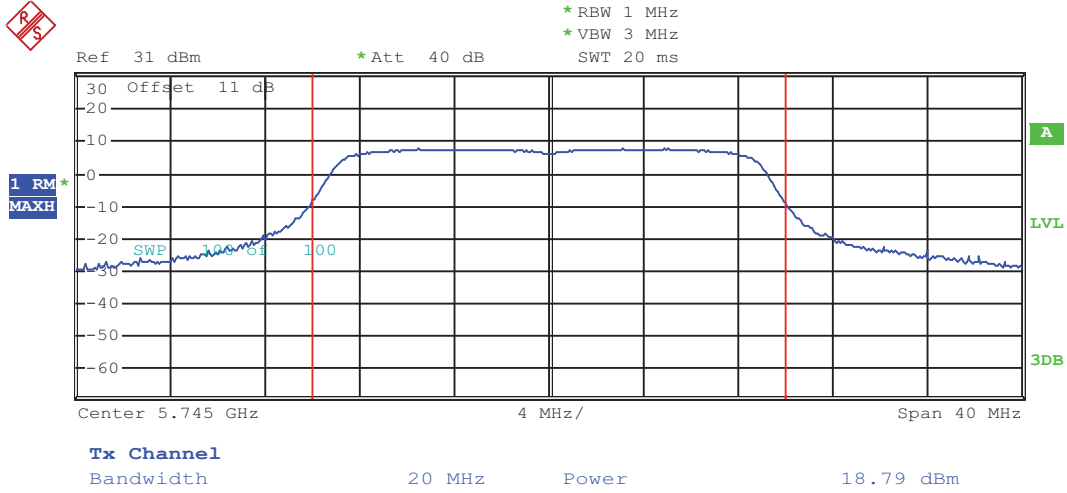

Highest channel


TX0

Test mode:

802.11n40




* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

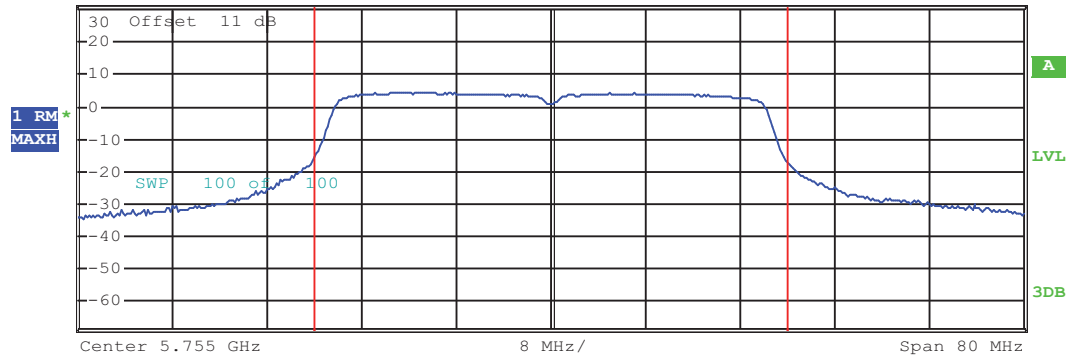

Lowest channel



* RBW 1 MHz
* VBW 3 MHz
SWT 20 ms

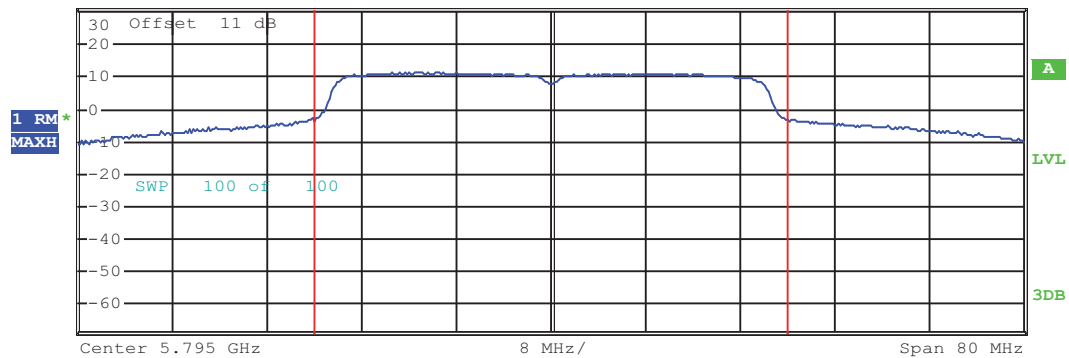


Highest channel


TX1

Test mode:


802.11a

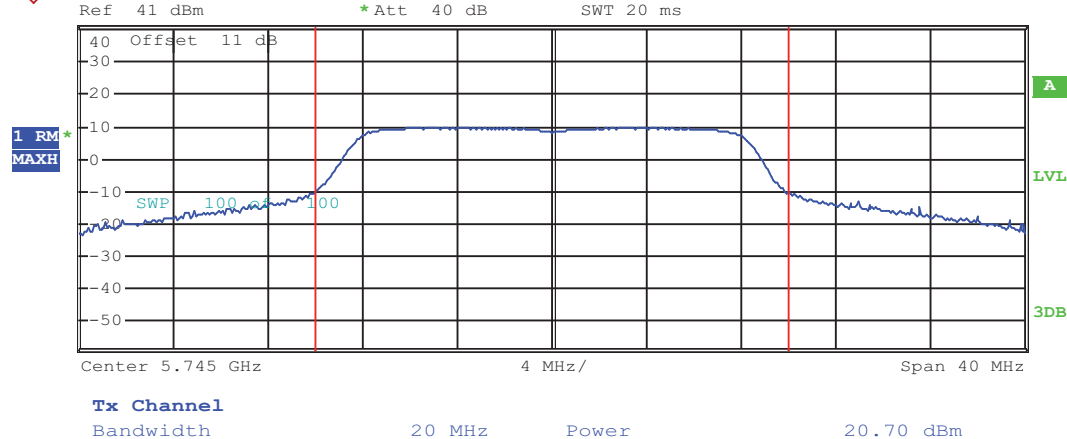

Lowest channel

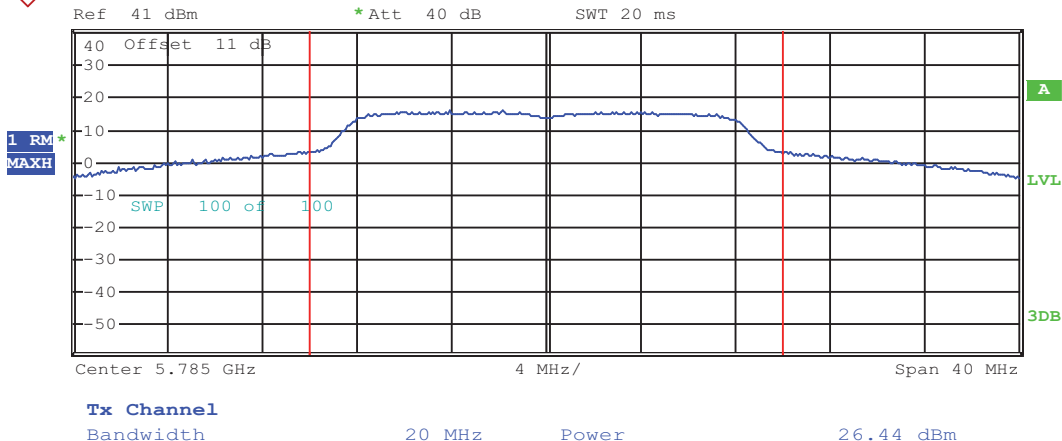

Middle channel

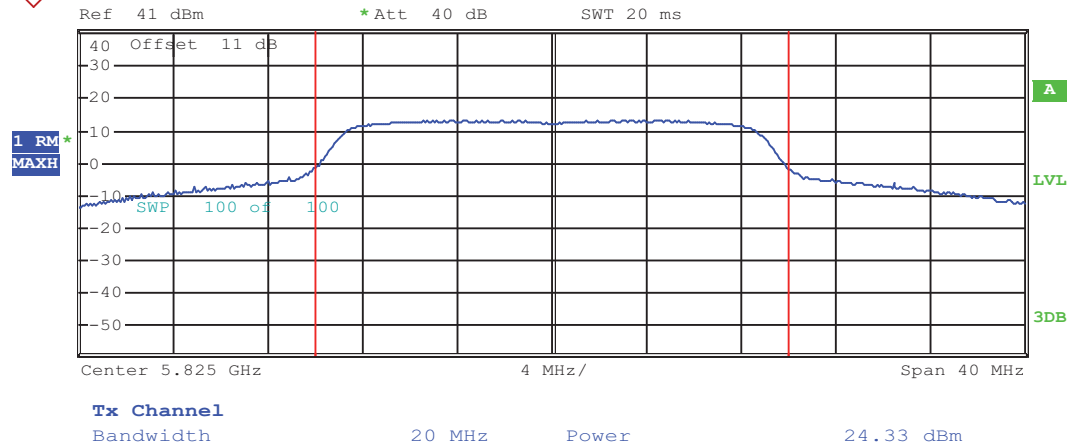

Highest channel


TX1

Test mode:

802.11n20



1 RM
MAXH

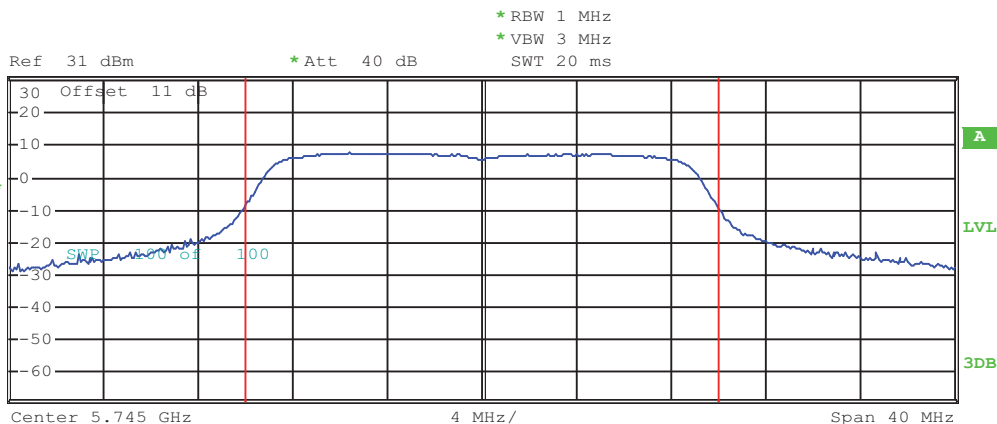

Tx Channel

Bandwidth

20 MHz


Power

18.59 dBm

Lowest channel



1 RM
MAXH

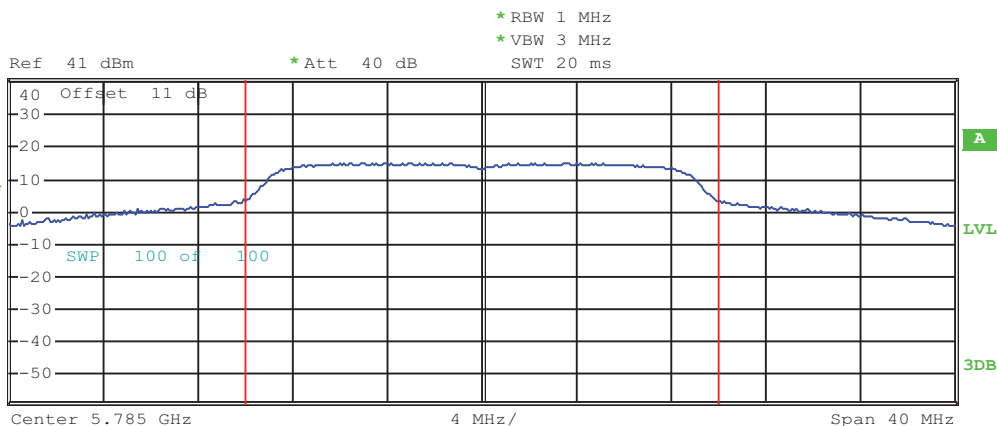

Tx Channel

Bandwidth

20 MHz


Power

26.11 dBm

Middle channel



1 RM
MAXH

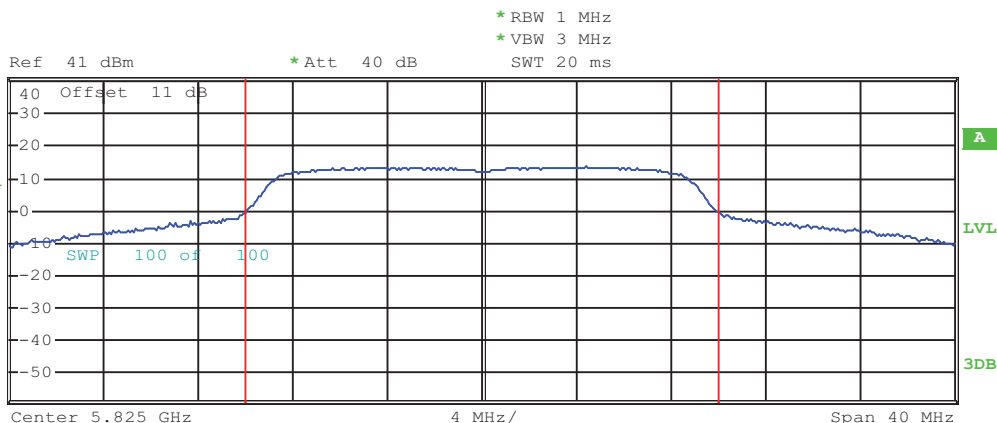

Tx Channel

Bandwidth

20 MHz

Power

24.55 dBm

Highest channel


TX1

Test mode:

802.11n40



1 RM
MAXH

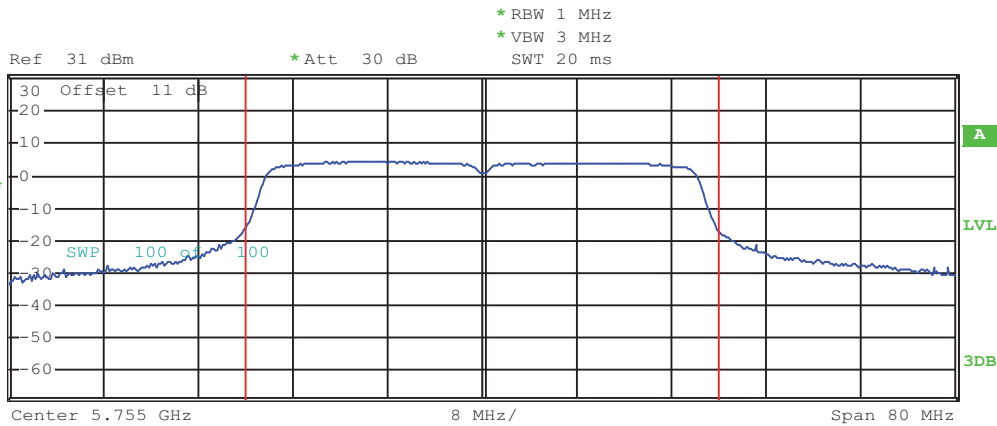


Tx Channel

Bandwidth 40 MHz Power 18.52 dBm

Lowest channel



1 RM
MAXH

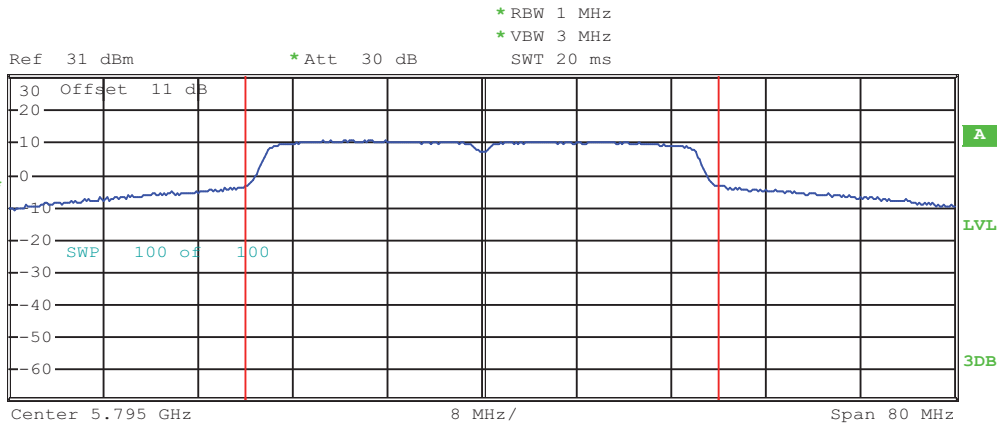


Tx Channel

Bandwidth 40 MHz Power 24.83 dBm

Highest channel

6.5 6dB EBW and 99% OBW

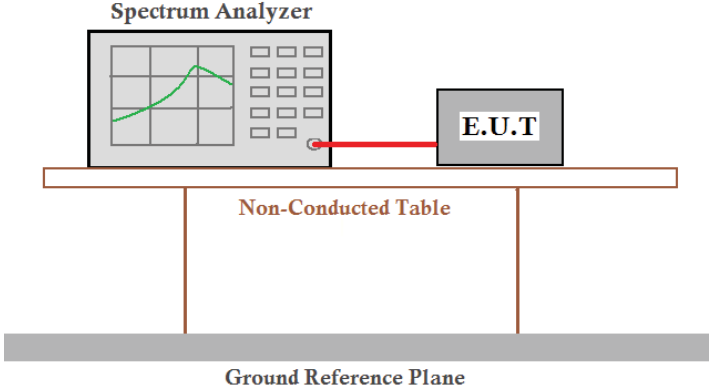Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	>500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

Test CH	6dB EBW (MHz)			Limit(kHz)	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.64	17.76	36.80	>500	Pass
Middle	16.64	17.84	---		
Highest	16.64	17.92	36.80		

Test CH	99% OBW (MHz)			Limit(kHz)	Result
	802.11a	802.11n20	802.11n40		
Lowest	16.64	17.68	36.48	N/A	N/A
Middle	28.56	29.92	---		
Highest	23.52	24.80	50.72		


Test plot as follows:

6 dB EBW Test mode: 802.11a

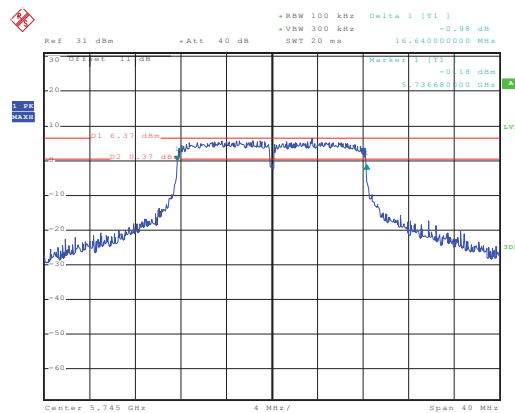


Date: 23.AUG.2014 14:18:23

Lowest channel

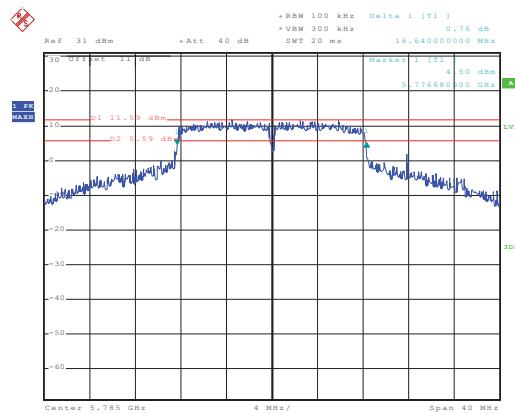

Date: 23.AUG.2014 13:15:03


Middle channel

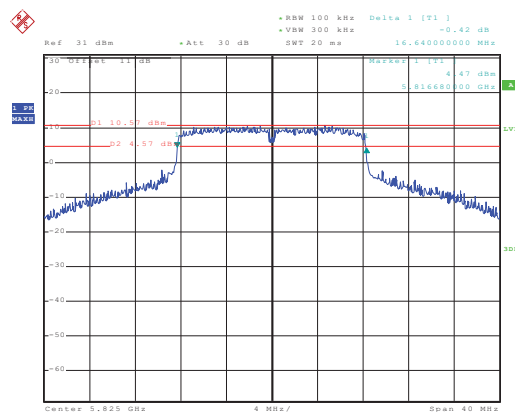

Date: 23.AUG.2014 16:03:08


Highest channel

Test mode: 802.11n20

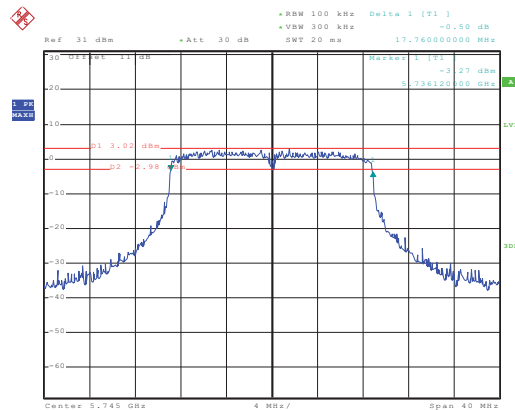


Date: 23.AUG.2014 15:41:57

Lowest channel

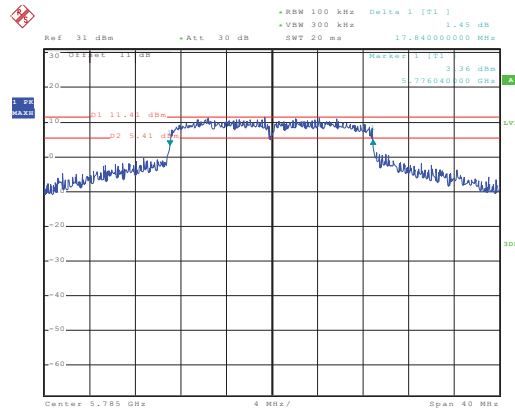

Date: 23.AUG.2014 16:26:21


Middle channel

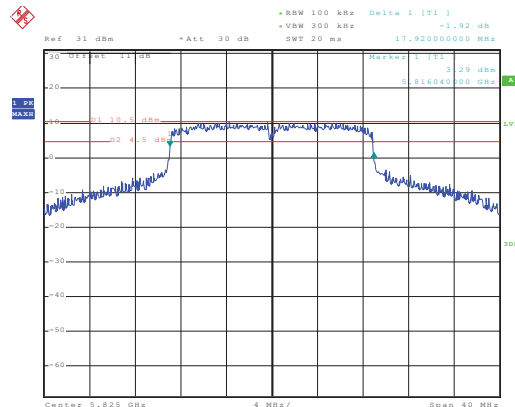

Date: 23.AUG.2014 15:35:44


Highest channel

Test mode: 802.11n40

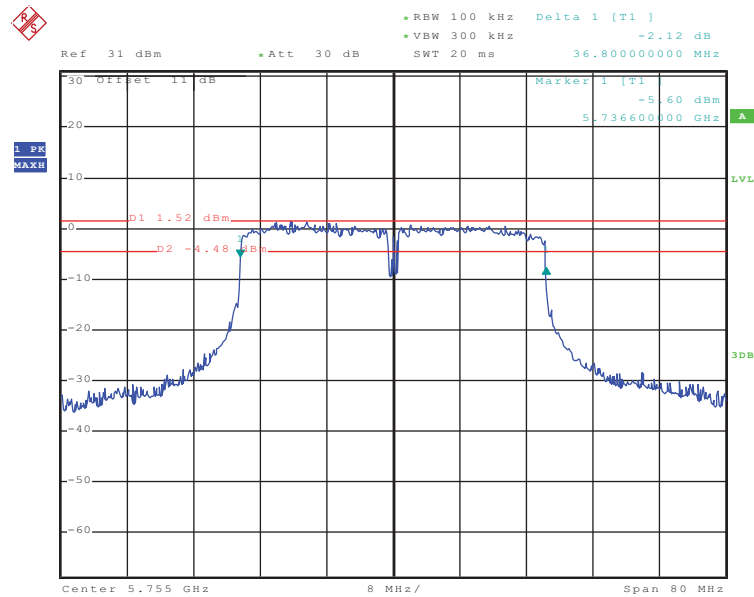

Date: 23.AUG.2014 17:07:10


Lowest channel

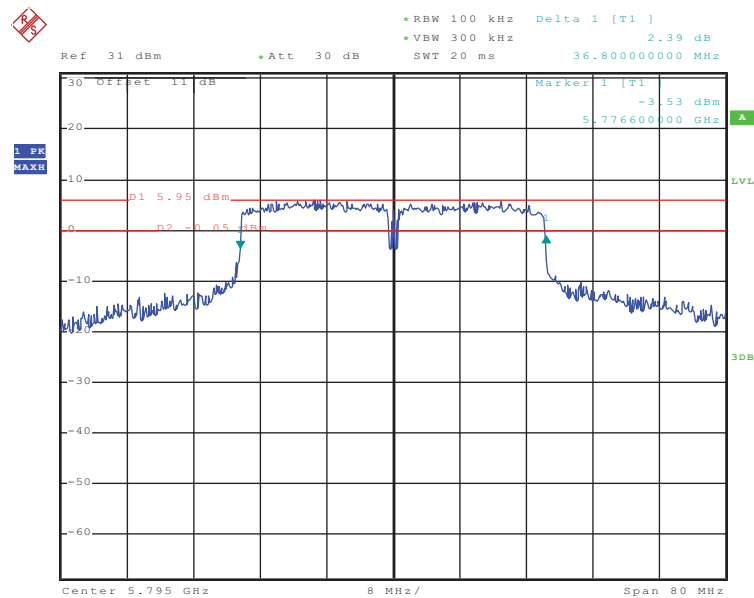

Date: 23.AUG.2014 17:17:01


Highest channel

99% OBW Test mode: 802.11a

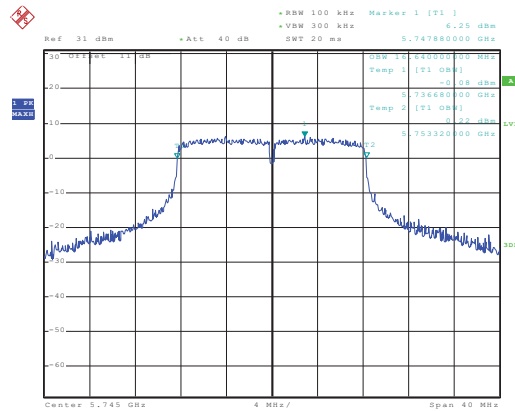


Date: 23.AUG.2014 14:17:40

Lowest channel

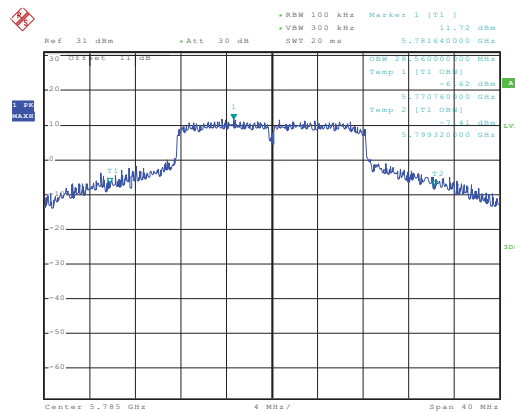

Date: 23.AUG.2014 16:13:38


Middle channel

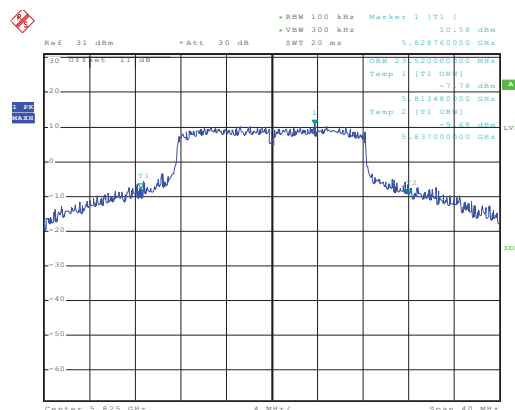

Date: 23.AUG.2014 16:12:12


Highest channel

Test mode: 802.11n20

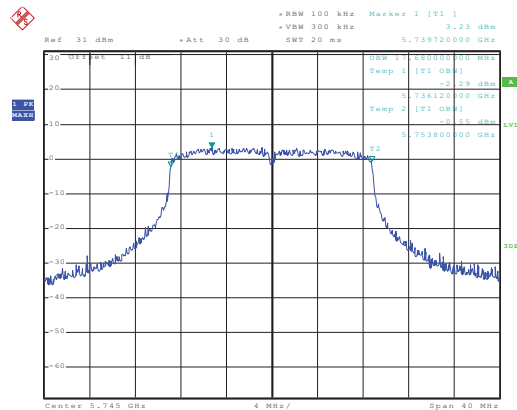


Date: 23.AUG.2014 15:40:40

Lowest channel

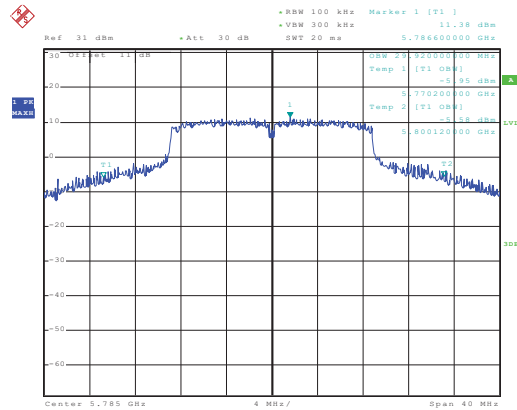

Date: 23.AUG.2014 16:23:54


Middle channel

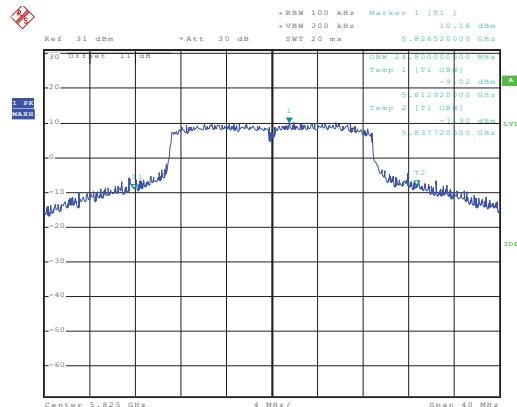

Date: 23.AUG.2014 15:36:44


Highest channel

Test mode: 802.11n40

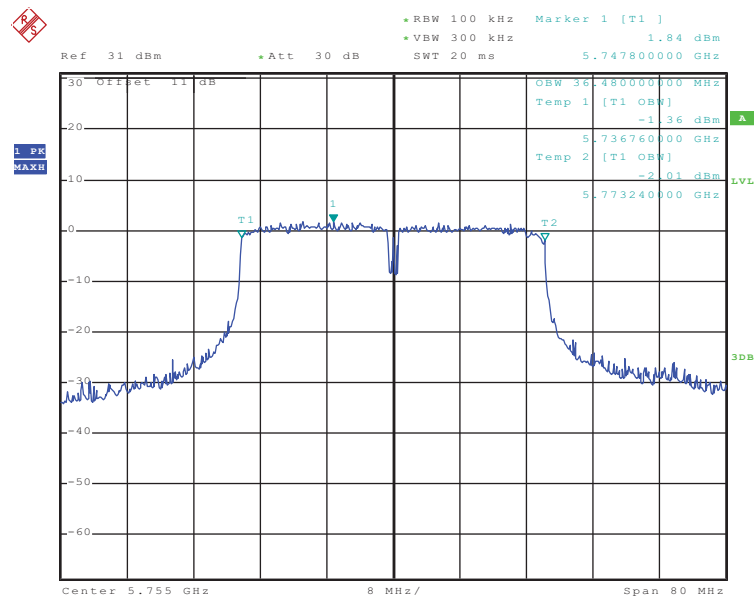

Date: 23.AUG.2014 17:10:33

Lowest channel

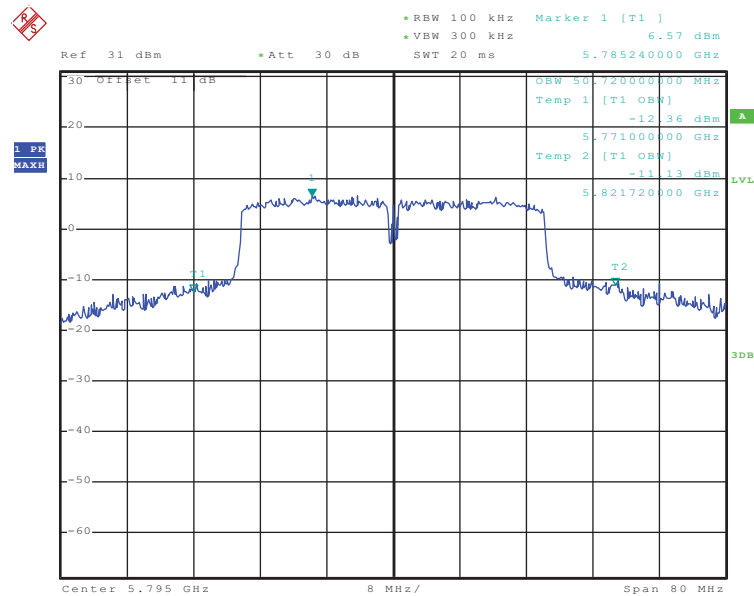


Date: 23.AUG.2014 17:15:44

Highest channel

6.6 Power Spectral Density

Test Requirement:	FCC Part15 C Section 15.247 (e)
-------------------	---------------------------------

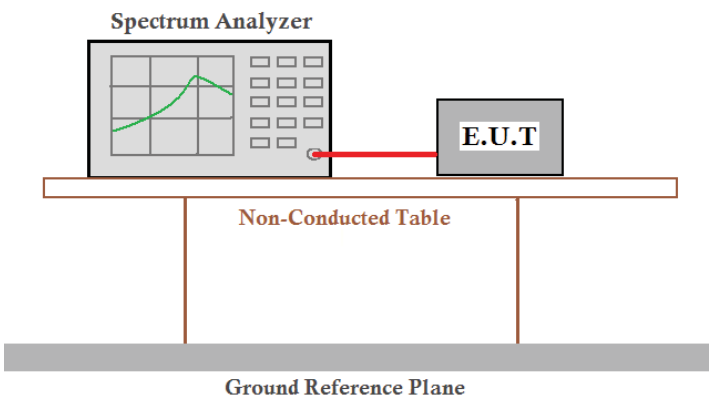Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	8dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

Mode	Test CH	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11a	Lowest	TX0	0.37	2.91	8.00	Pass
		TX1	-0.62			
	Middle	TX0	3.64	6.50	8.00	Pass
		TX1	3.33			
	Highest	TX0	2.71	5.48	8.00	Pass
		TX1	2.22			
802.11n20	Lowest	TX0	-2.95	0.08	8.00	Pass
		TX1	-2.92			
	Middle	TX0	3.54	6.57	8.00	Pass
		TX1	3.58			
	Highest	TX0	2.40	5.54	8.00	Pass
		TX1	2.66			
802.11n40	Lowest	TX0	-5.07	-1.84	8.00	Pass
		TX1	-4.64			
	Highest	TX0	1.84	4.34	8.00	Pass
		TX1	0.75			

Test plot as follows:


TX0

Test mode: 802.11a

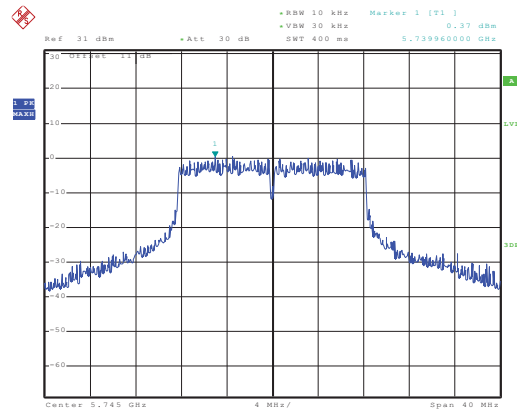


Date: 29.AUG.2014 14:11:51

Lowest channel

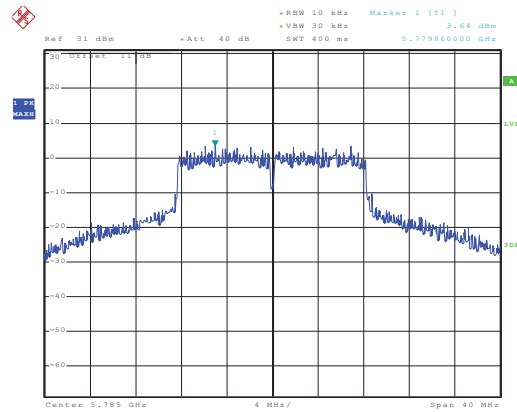

Date: 29.AUG.2014 14:10:16


Middle channel

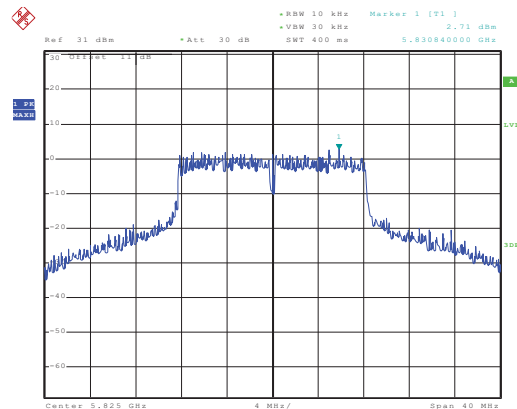

Date: 29.AUG.2014 15:58:56


Highest channel

Test mode: 802.11n20

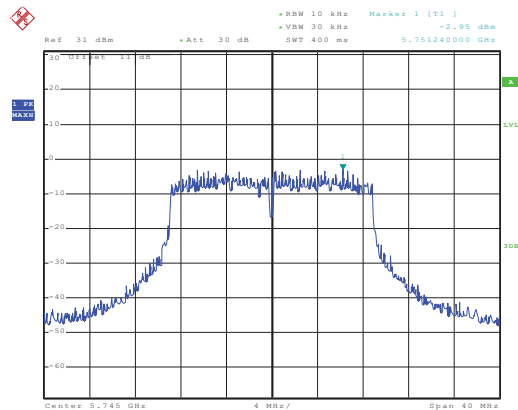


Date: 23.AUG.2014 15:39:12

Lowest channel

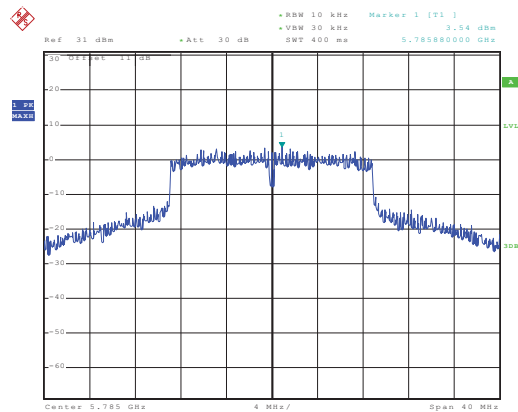

Date: 23.AUG.2014 15:55:10


Middle channel

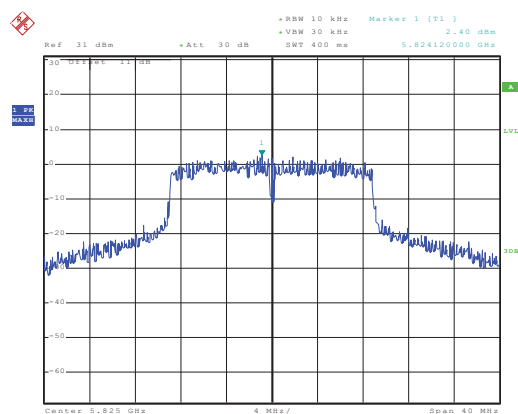

Date: 23.AUG.2014 15:56:10


Highest channel

Test mode: 802.11n40

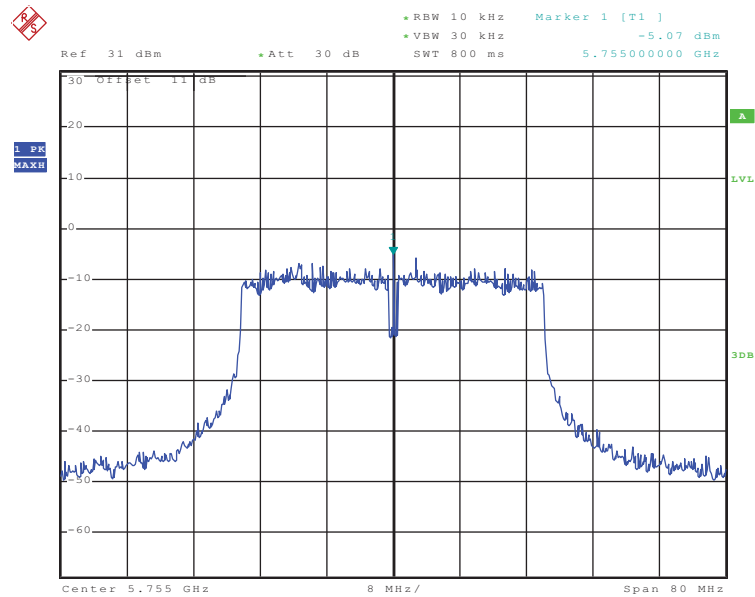

Date: 23.AUG.2014 17:13:26

Lowest channel

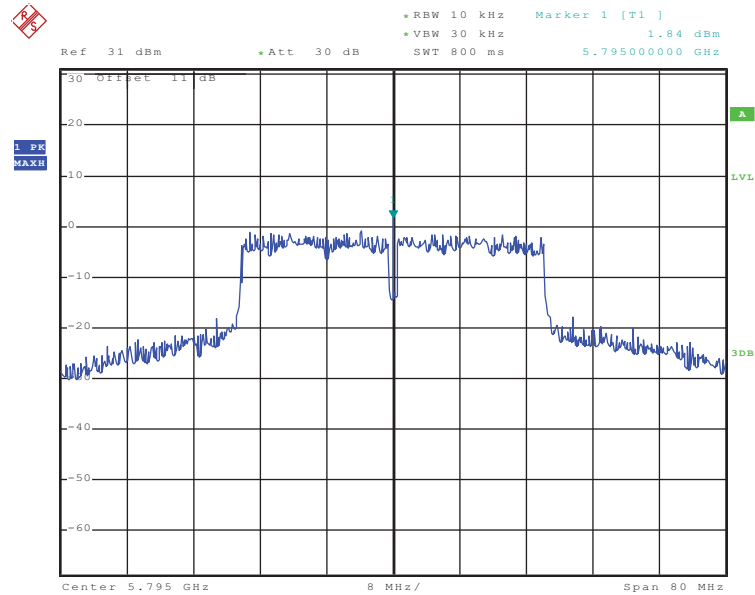


Date: 23.AUG.2014 17:19:01


Highest channel

TX1

Test mode: 802.11a

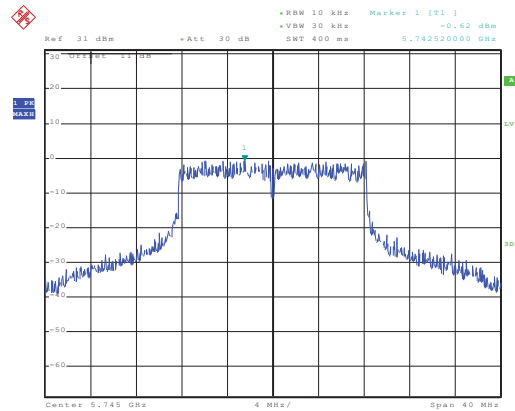


Lowest channel

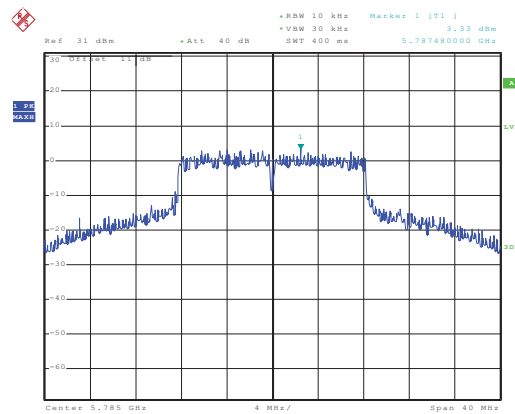

Date: 23.AUG.2014 14:11:16


Middle channel

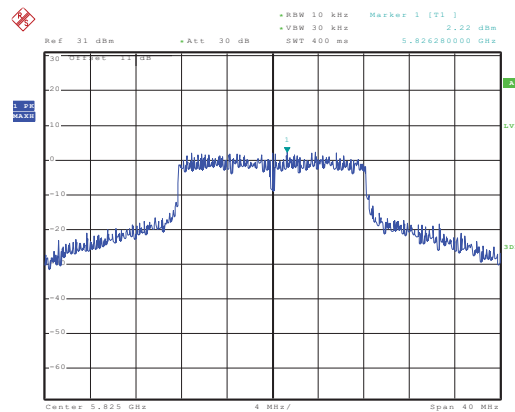

Date: 23.AUG.2014 15:57:26


Highest channel

Test mode: 802.11n20

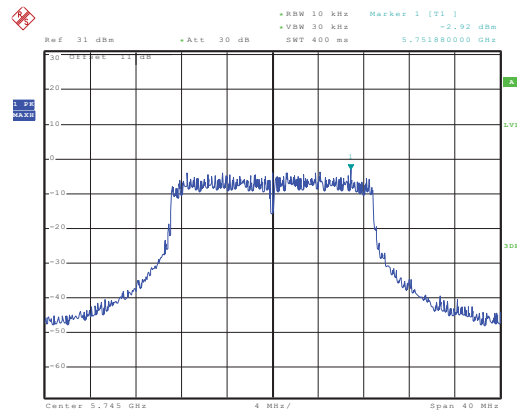


Date: 23.AUG.2014 15:19:48

Lowest channel

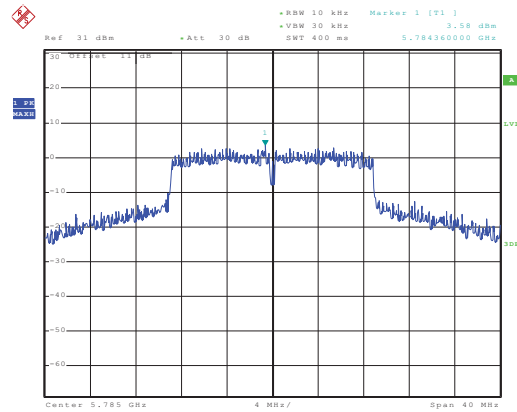

Date: 23.AUG.2014 15:54:07


Middle channel

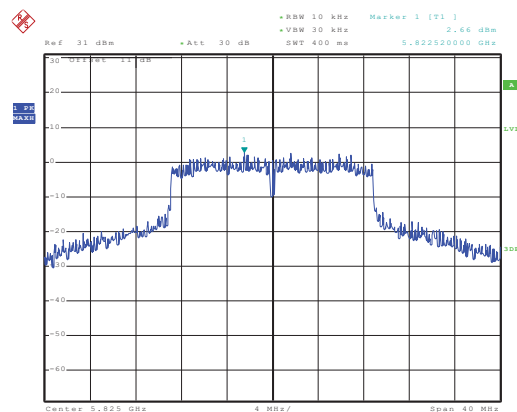

Date: 23.AUG.2014 15:56:40


Highest channel

Test mode: 802.11n40

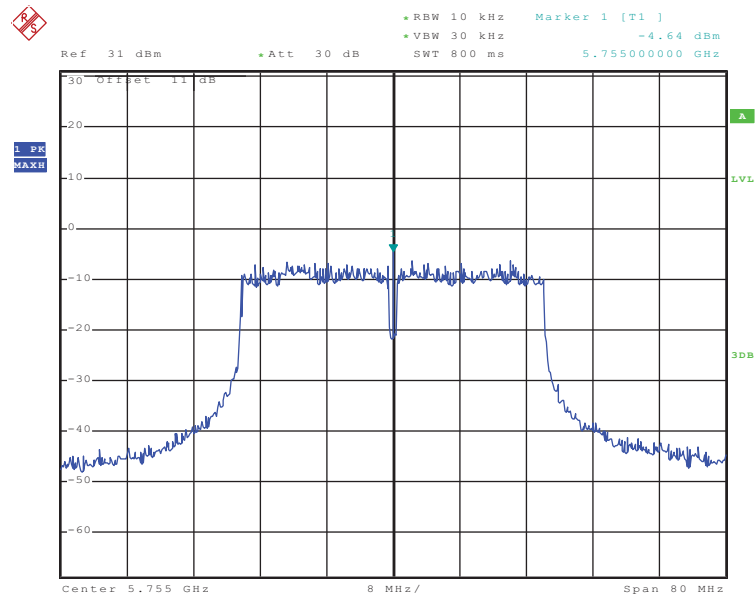

Date: 23.AUG.2014 17:13:56

Lowest channel

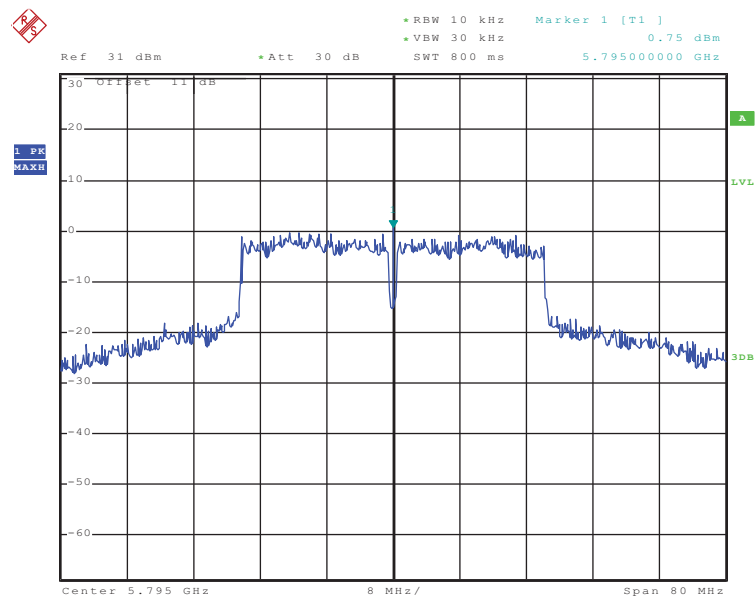


Date: 23.AUG.2014 17:18:30

Highest channel

6.7 Band Edge

6.7.1 Conducted Emission Method

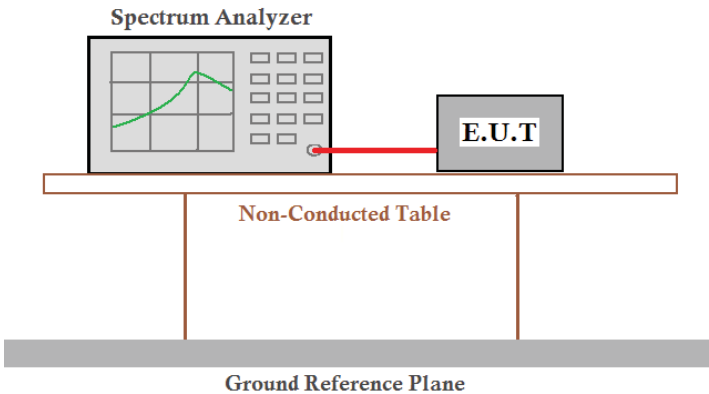
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB 558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

TX0


Test mode:

802.11a

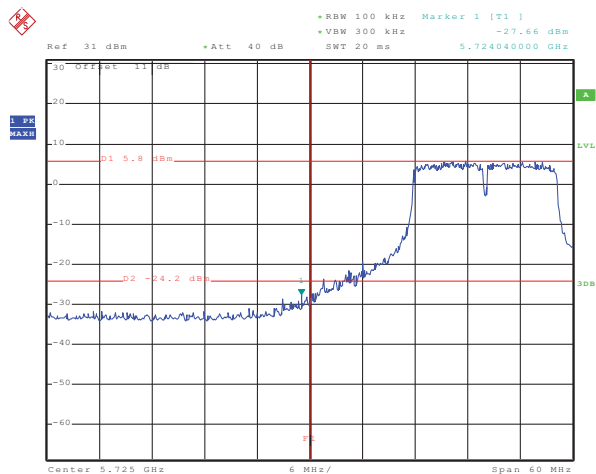

Date: 23.AUG.2014 13:53:48

Lowest channel

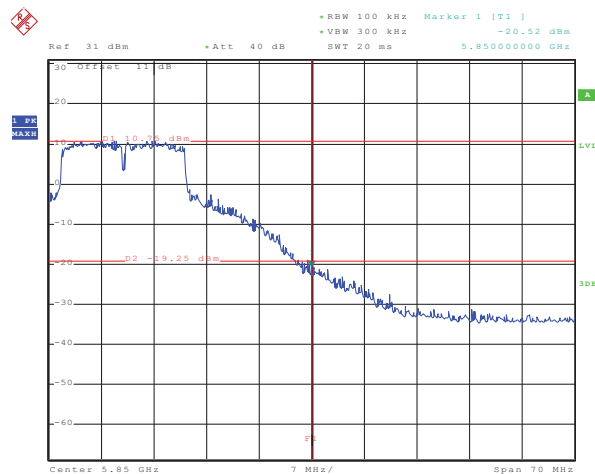


Date: 23.AUG.2014 14:00:04

Highest channel


Test mode:

802.11n20

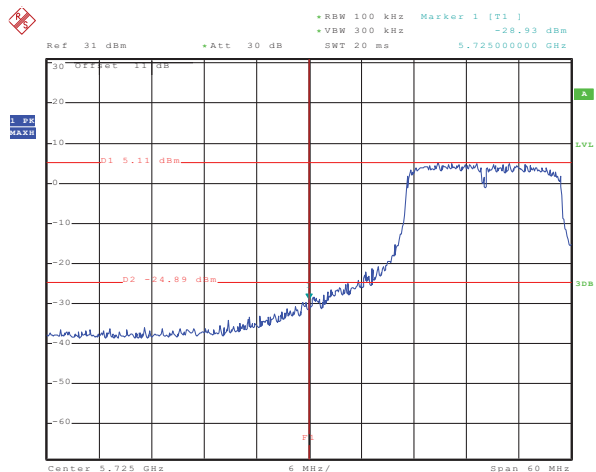

Date: 23.AUG.2014 15:23:45

Lowest channel

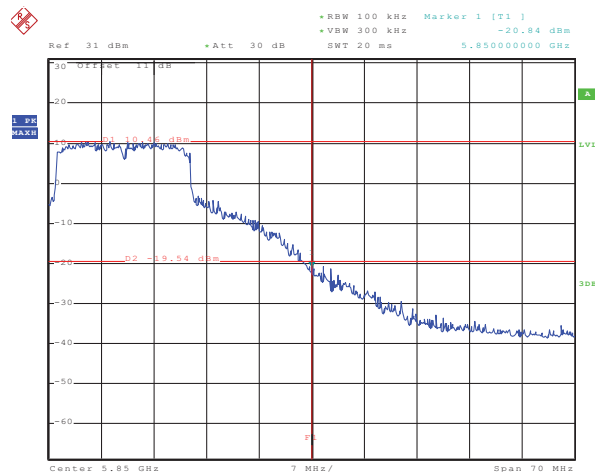


Date: 23.AUG.2014 15:26:23

Highest channel


Test mode:

802.11n40

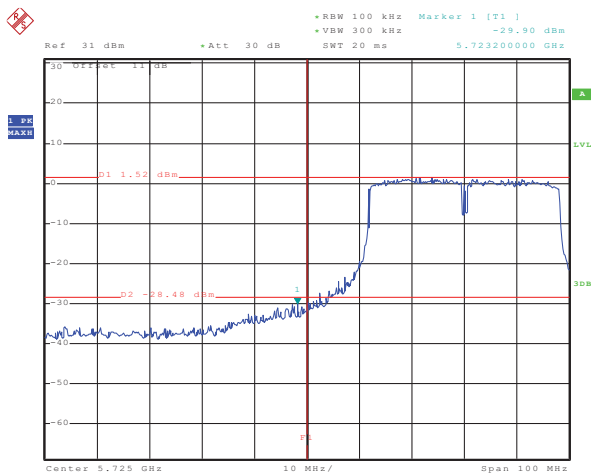

Date: 23.AUG.2014 16:52:33

Lowest channel

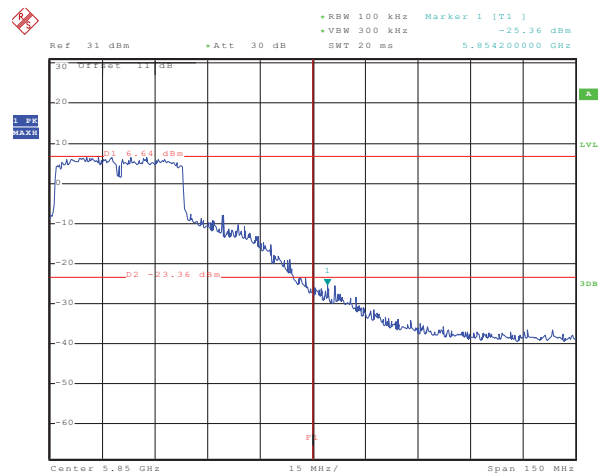


Date: 23.AUG.2014 16:56:46

Highest channel

TX1


Test mode:

802.11a

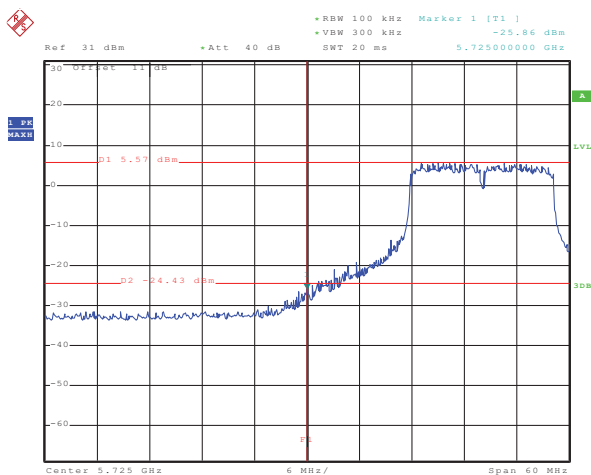

Date: 23.AUG.2014 13:52:05

Lowest channel

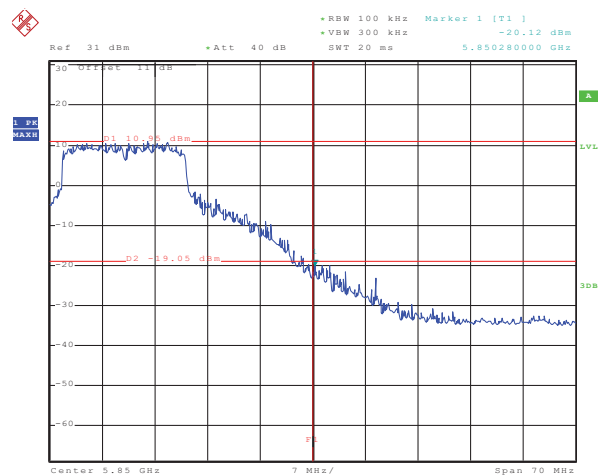


Date: 23.AUG.2014 14:04:29

Highest channel


Test mode:

802.11n20

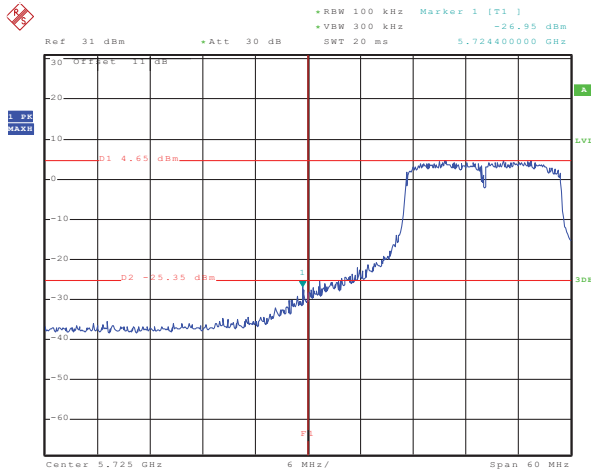

Date: 23.AUG.2014 15:22:29

Lowest channel

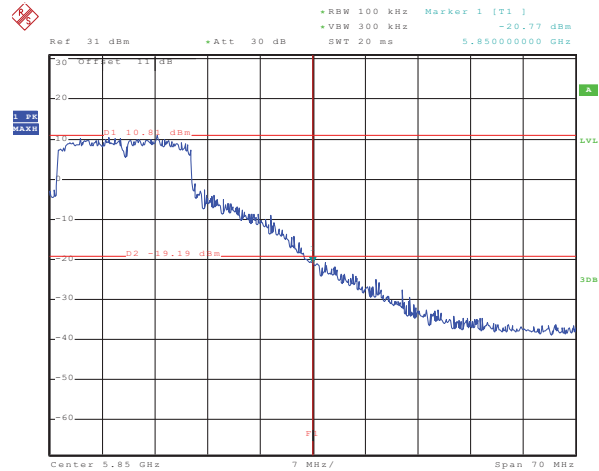


Date: 23.AUG.2014 15:28:14

Highest channel


Test mode:

802.11n40

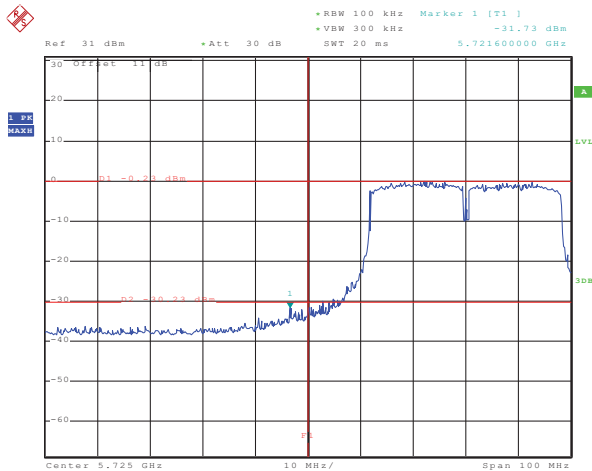

Date: 23.AUG.2014 16:51:32

Lowest channel

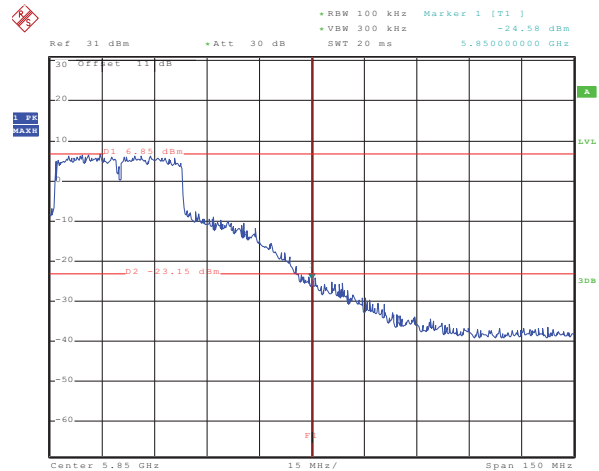

Date: 23.AUG.2014 16:58:14

Highest channel

6.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																		
Test Method:	ANSI C63.4: 2003																		
Test Frequency Range:	5.35 GHz to 5.46 GHz																		
Test site:	Measurement Distance: 3m																		
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark															
Above 1GHz	Peak	1MHz	3MHz	Peak Value															
	Peak	1MHz	10Hz	Average Value															
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.00</td><td>Average Value</td></tr><tr><td>74.00</td><td>Peak Value</td></tr></table>					Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value	74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark																	
Above 1GHz	54.00	Average Value																	
	74.00	Peak Value																	
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																		
Test setup:	The diagram illustrates the test setup for radiated emissions. On the left, an Equipment Under Test (EUT) is placed on a Turn Table at a height of 0.8m. The EUT is positioned 3m away from an Antenna Tower. The Antenna Tower is a vertical structure with a Horn Antenna at a height of 4m. A Spectrum Analyzer is connected to the Antenna Tower via an Amplifier. The distance from the ground to the antenna is 1m.																		
Test Instruments:	Refer to section 5.6 for details																		
Test mode:	Keeping MIMO TX mode																		
Test results:	Passed																		

Test mode: 802.11a			Test channel: Lowest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	48.33	31.78	9.15	40.18	49.08	74.00	-24.93	Horizontal
5460.00	49.65	31.99	9.16	40.23	50.57	74.00	-23.43	Horizontal
5350.00	48.65	31.78	9.15	40.18	49.40	74.00	-24.60	Vertical
5460.00	49.65	31.99	9.16	40.23	50.57	74.00	-23.43	Vertical
Test mode: 802.11a			Test channel: Lowest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.85	31.78	9.15	40.18	38.60	54.00	-15.40	Horizontal
5460.00	38.65	31.99	9.16	40.23	39.57	54.00	-14.43	Horizontal
5350.00	37.54	31.78	9.15	40.18	38.29	54.00	-15.71	Vertical
5460.00	38.65	31.99	9.16	40.23	39.57	54.00	-14.43	Vertical

Test mode: 802.11n-HT20			Test channel: Lowest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	48.65	31.78	9.15	40.18	49.40	74.00	-24.60	Horizontal
5460.00	49.58	31.99	9.16	40.23	50.50	74.00	-23.50	Horizontal
5350.00	48.68	31.78	9.15	40.18	49.43	74.00	-24.57	Vertical
5460.00	49.58	31.99	9.16	40.23	50.50	74.00	-23.50	Vertical
Test mode: 802.11 n-HT20			Test channel: Lowest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.89	31.78	9.15	40.18	38.64	54.00	-15.36	Horizontal
5460.00	38.65	31.99	9.16	40.23	39.57	54.00	-14.43	Horizontal
5350.00	37.65	31.78	9.15	40.18	38.40	54.00	-15.60	Vertical
5460.00	38.54	31.99	9.16	40.23	39.46	54.00	-14.54	Vertical


Test mode: 802.11n-HT40			Test channel: Lowest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	48.65	31.78	9.15	40.18	49.40	74.00	-24.60	Horizontal
5460.00	49.88	31.99	9.16	40.23	50.80	74.00	-23.20	Horizontal
5350.00	48.65	31.78	9.15	40.18	49.40	74.00	-24.60	Vertical
5460.00	49.24	31.99	9.16	40.23	50.16	74.00	-23.84	Vertical
Test mode: 802.11 n-HT40			Test channel: Lowest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5350.00	37.65	31.78	9.15	40.18	38.40	54.00	-15.60	Horizontal
5460.00	38.14	31.99	9.16	40.23	39.06	54.00	-14.94	Horizontal
5350.00	37.47	31.78	9.15	40.18	38.22	54.00	-15.78	Vertical
5460.00	38.94	31.99	9.16	40.23	39.86	54.00	-14.14	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.8 Spurious Emission

6.8.1 Conducted Emission Method

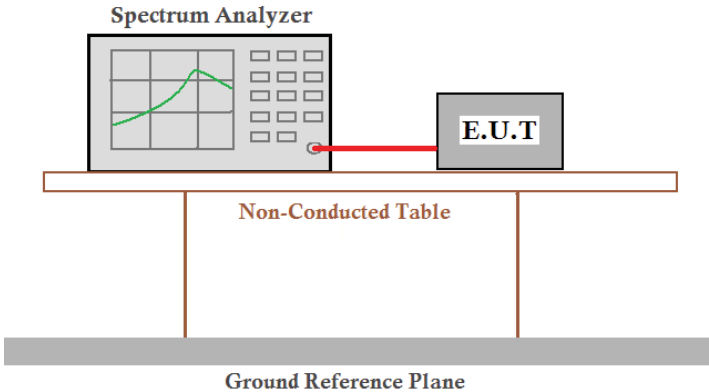Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.6 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Test plot as follows:

Remark: No emission found from 30GHz to 40GHz band , so only reported the worse case.

TX0

Test mode: 802.11a


Lowest channel

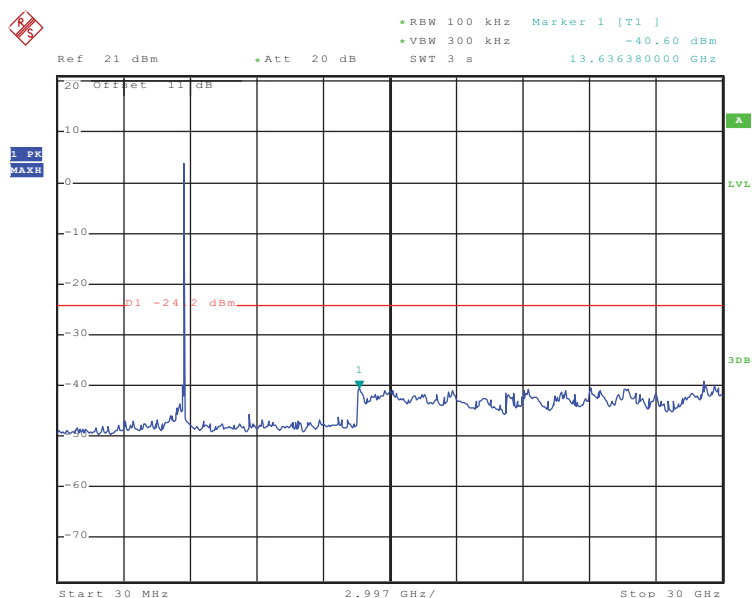

Date: 23.AUG.2014 17:41:51

30MHz~30GHz


Middle channel

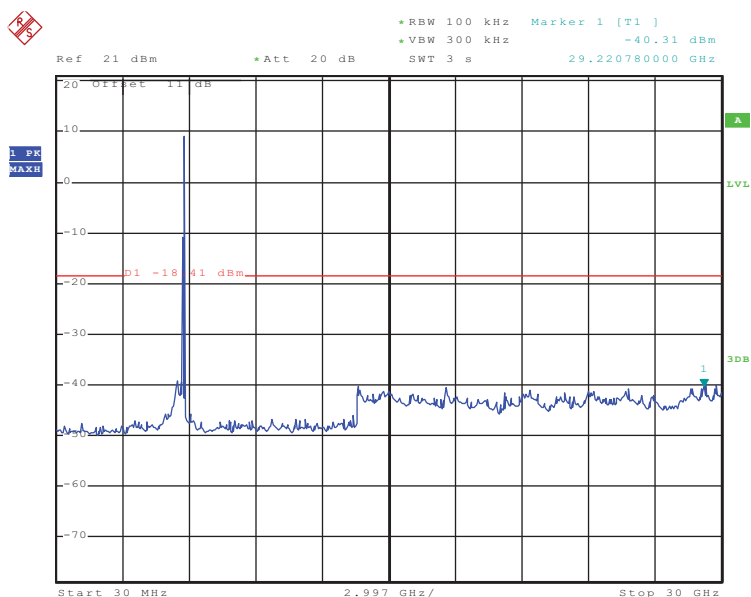

Date: 23.AUG.2014 17:48:28

30MHz~30GHz

Highest channel

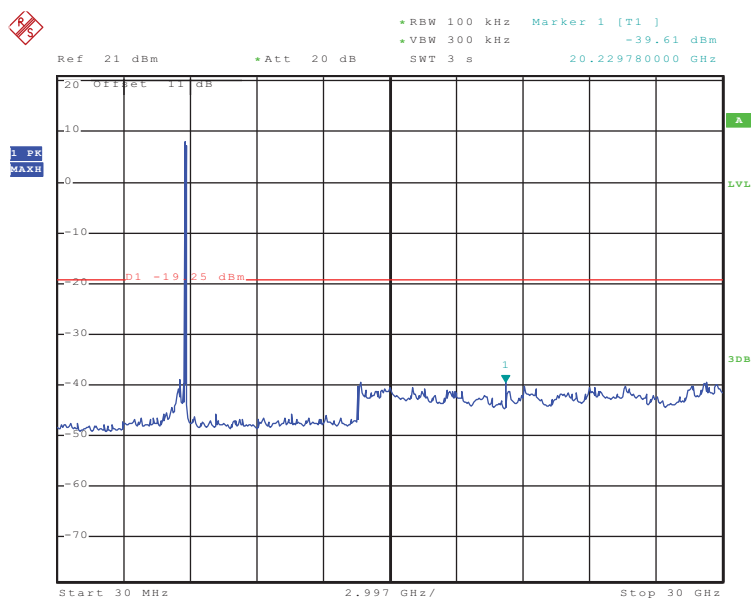


Date: 23.AUG.2014 17:46:33

30MHz~30GHz

Test mode: 802.11n20


Lowest channel

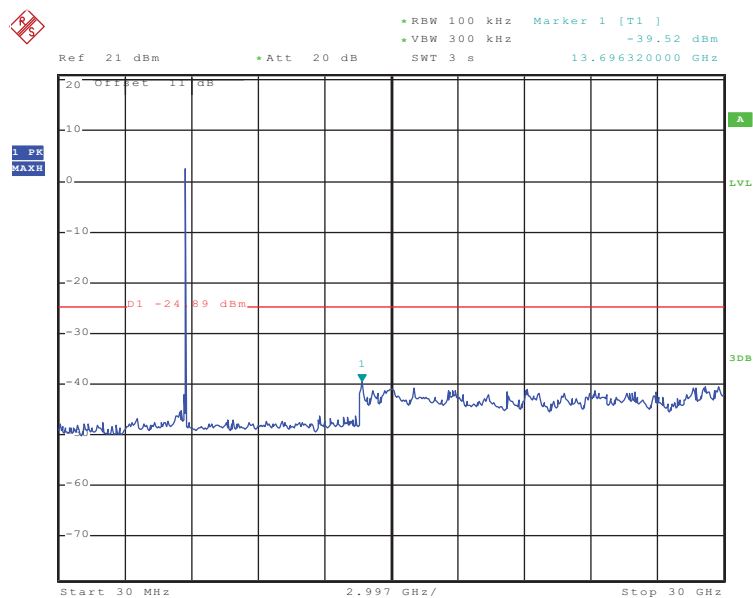

Date: 23.AUG.2014 17:36:34

30MHz~30GHz


Middle channel

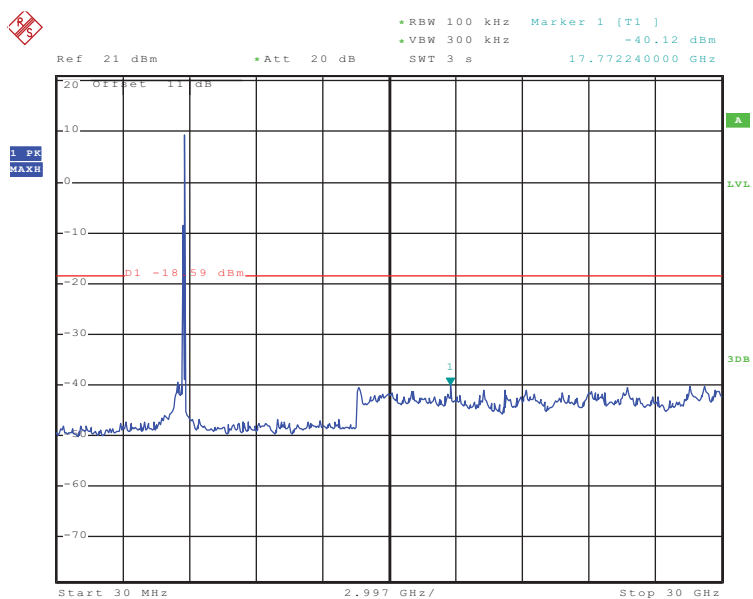

Date: 23.AUG.2014 17:38:48

30MHz~30GHz

Highest channel

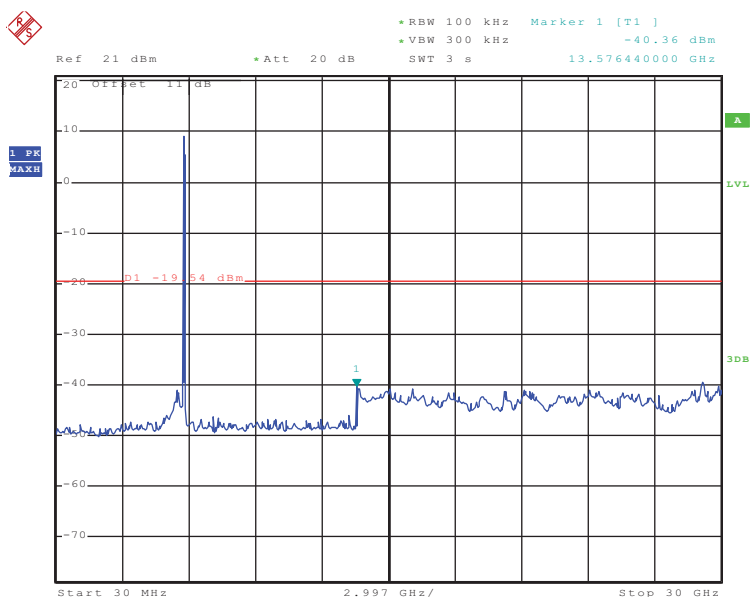


Date: 23.AUG.2014 17:39:30

30MHz~30GHz

Test mode: 802.11n40


Lowest channel

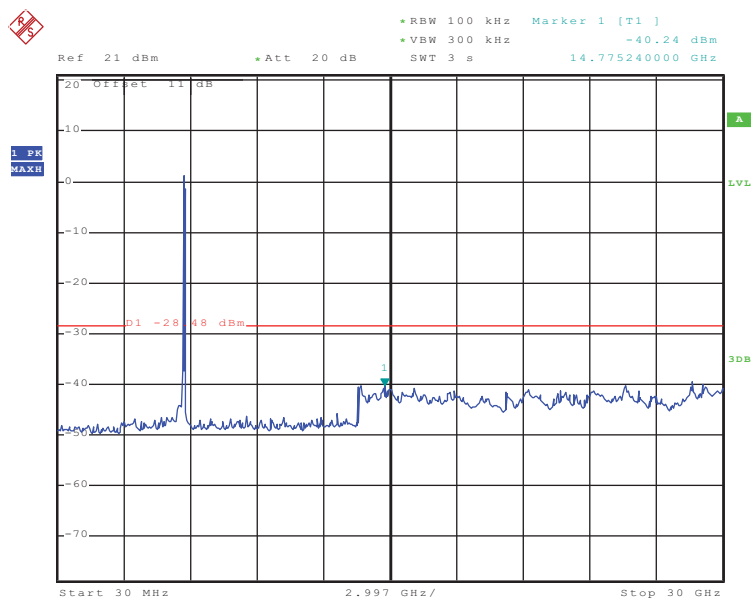

Date: 23.AUG.2014 17:55:07

30MHz~30GHz

Highest channel

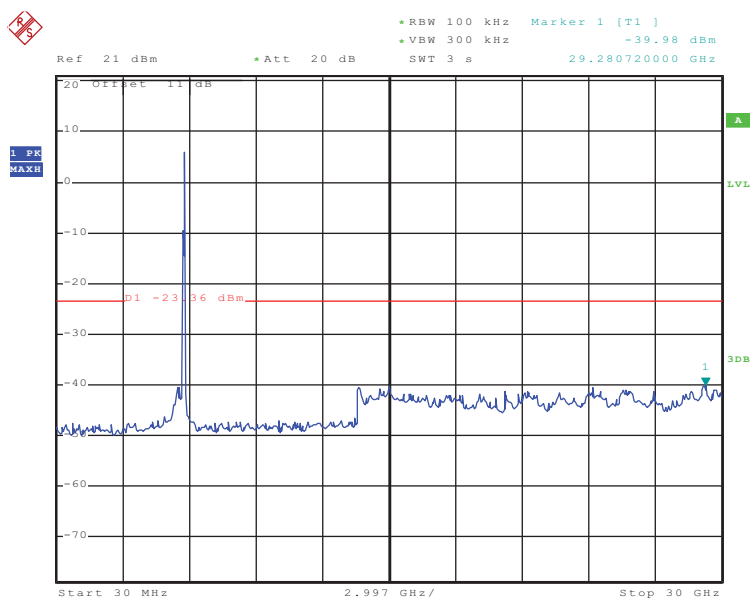


Date: 23.AUG.2014 17:57:25

30MHz~30GHz

TX1

Test mode: 802.11a


Lowest channel

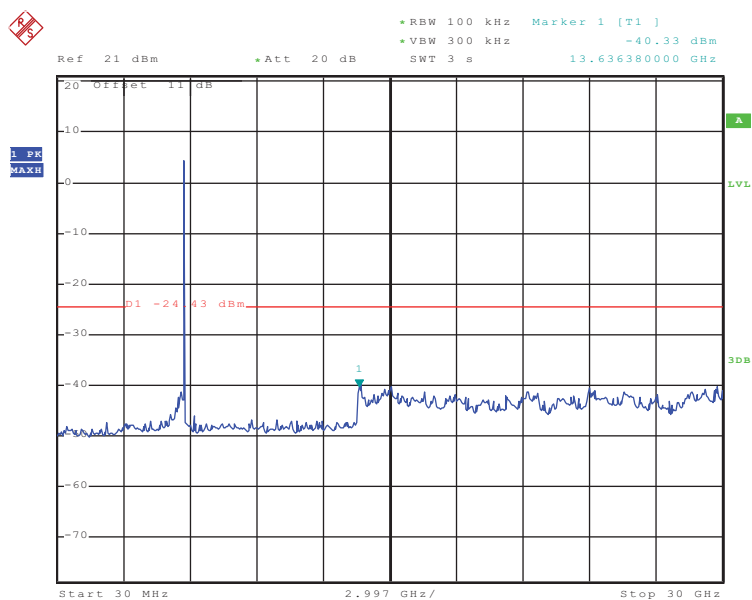

Date: 23.AUG.2014 17:41:01

30MHz~30GHz


Middle channel

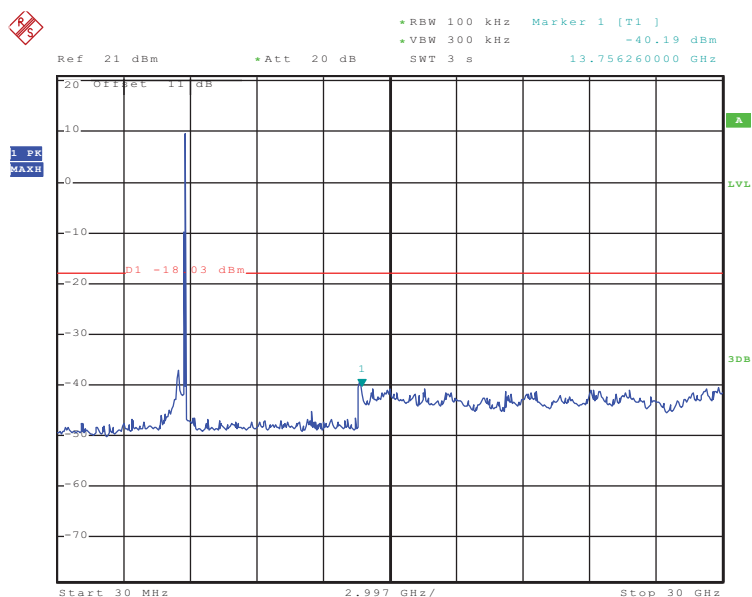

Date: 23.AUG.2014 17:47:52

30MHz~30GHz

Highest channel

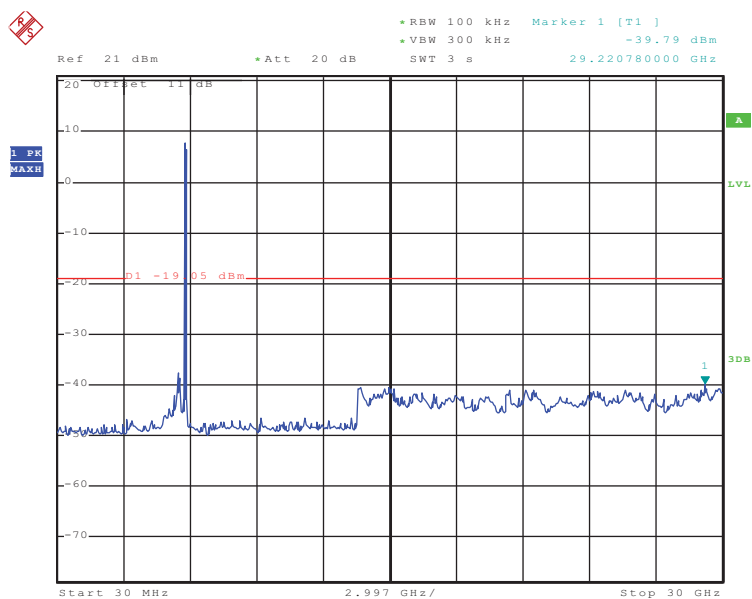


Date: 23.AUG.2014 17:47:16

30MHz~30GHz

Test mode: 802.11n20


Lowest channel

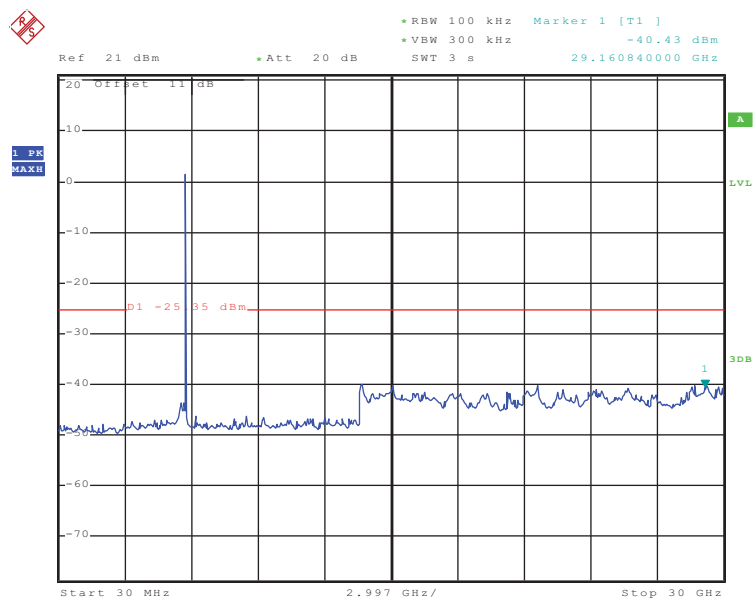

Date: 23.AUG.2014 17:37:29

30MHz~30GHz


Middle channel

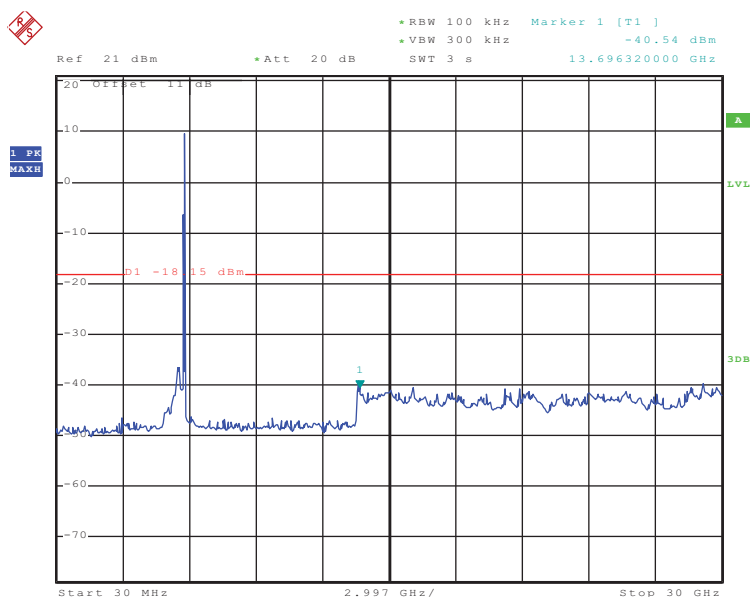

Date: 23.AUG.2014 17:38:12

30MHz~30GHz

Highest channel

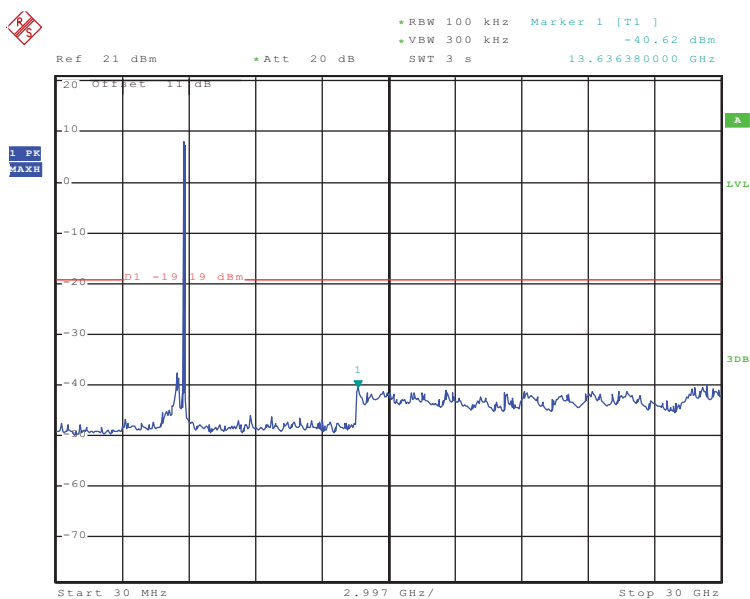


Date: 23.AUG.2014 17:40:09

30MHz~30GHz

Test mode: 802.11n40


Lowest channel

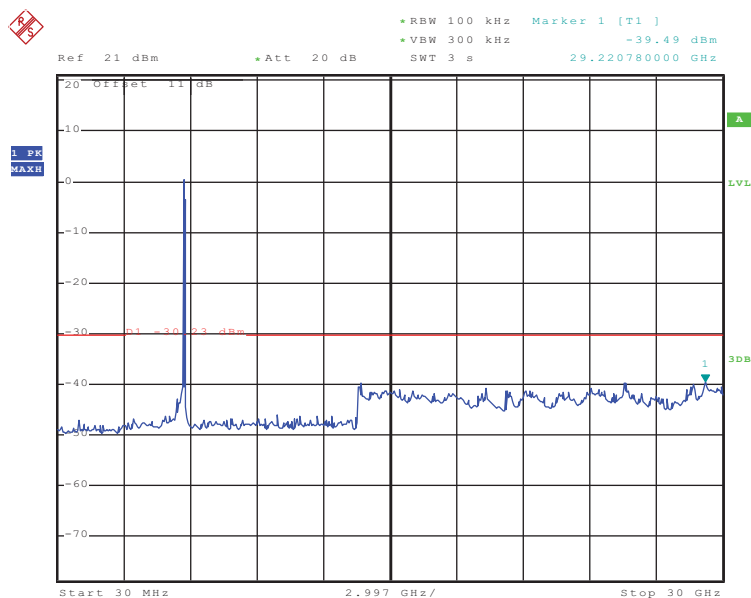

Date: 23.AUG.2014 17:56:03

30MHz~30GHz

Highest channel


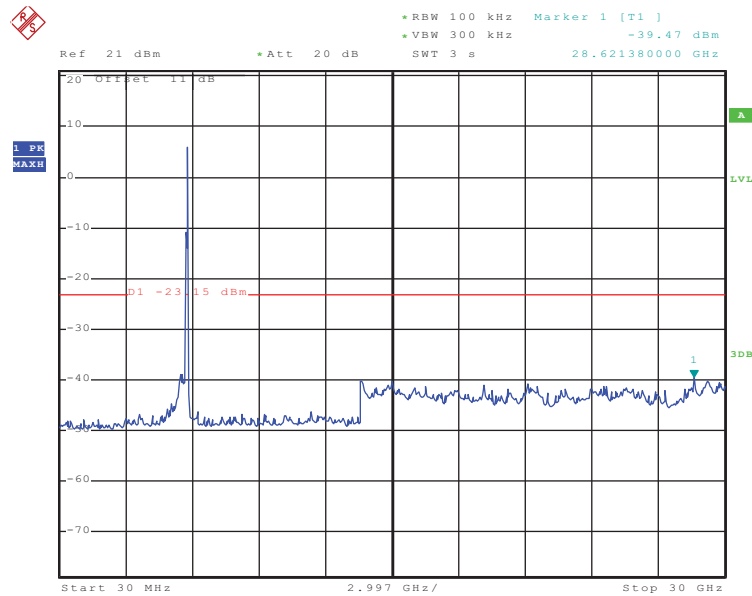


Date: 23.AUG.2014 17:56:44

30MHz~30GHz

6.8.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209 and 15.205																								
Test Method:	ANSI C63.4:2003																								
Test Frequency Range:	30MHz to 40GHz																								
Test site:	Measurement Distance: 3m																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>74.0</td><td>Peak Value</td></tr></table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								

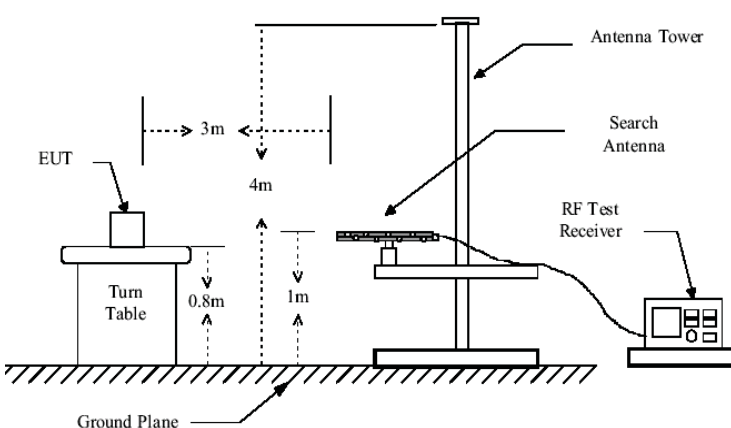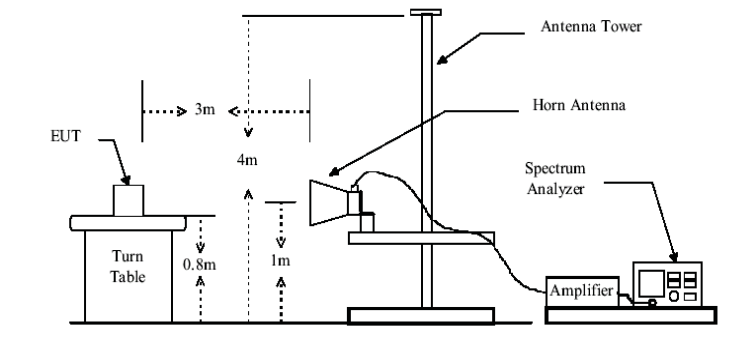Test setup:	Below 1GHz  Above 1GHz 
Test Instruments:	Refer to section 5.6 for details
Test mode:	keeping MIMO TX mode
Test results:	Passed

Below 1GHz

Adapter 1: GRT-240050


Horizontal:

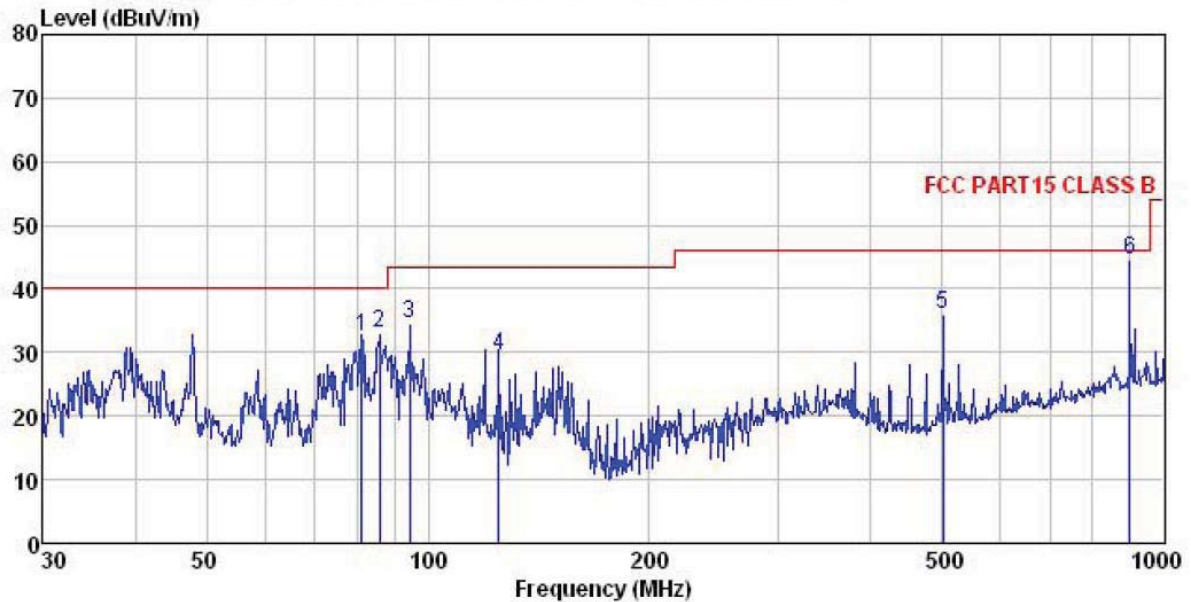

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 479RF
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : POE: GRT-240050

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	81.212	52.33	8.98	0.86	29.63	32.54	40.00	-7.46	QP
2	85.898	51.26	10.60	0.89	29.59	33.16	40.00	-6.84	QP
3	94.428	50.39	12.75	0.93	29.55	34.52	43.50	-8.98	QP
4	125.007	48.09	9.70	1.16	29.36	29.59	43.50	-13.91	QP
5	501.179	45.97	16.63	2.41	28.96	36.05	46.00	-9.95	QP
6	900.147	47.87	21.09	3.35	27.88	44.43	46.00	-1.57	QP

Vertical:

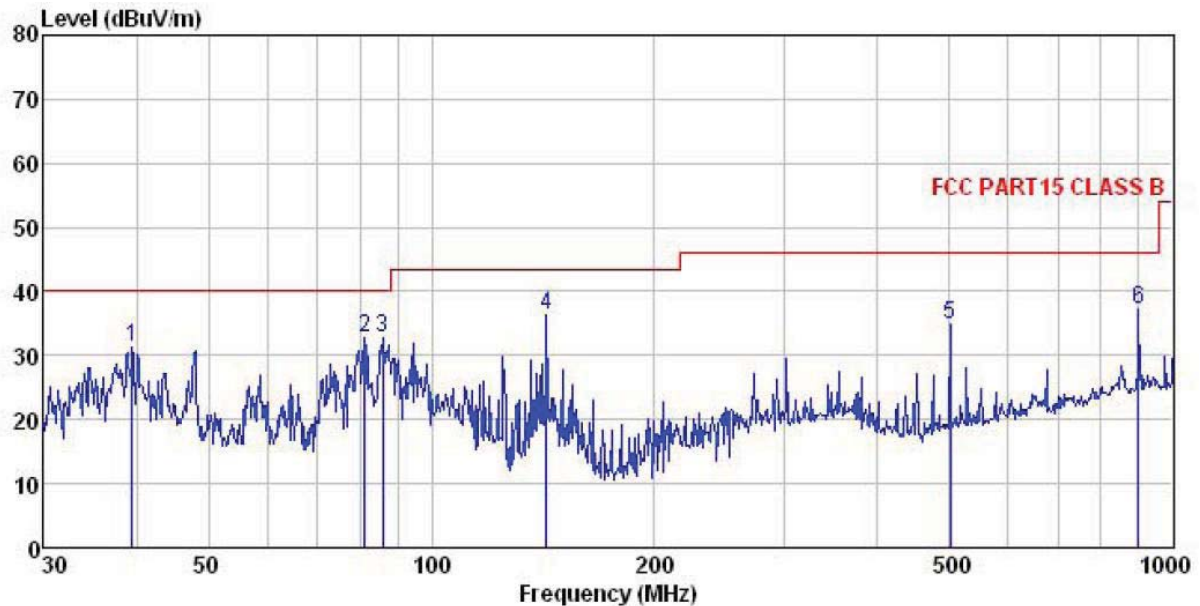


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 479RF
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : POE: GRT-240050

	Freq	ReadAntenna	Cable Preamp		Limit	Over	
		Level Factor	Loss Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
1	39.437	47.18	13.44	0.52	29.91	31.23	40.00 -8.77 QP
2	81.212	52.62	8.98	0.86	29.63	32.83	40.00 -7.17 QP
3	85.898	50.84	10.60	0.89	29.59	32.74	40.00 -7.26 QP
4	142.824	56.14	8.21	1.28	29.26	36.37	43.50 -7.13 QP
5	501.179	44.77	16.63	2.41	28.96	34.85	46.00 -11.15 QP
6	900.147	40.54	21.09	3.35	27.88	37.10	46.00 -8.90 QP

Adapter 2: AY012E-ZF243


Horizontal:

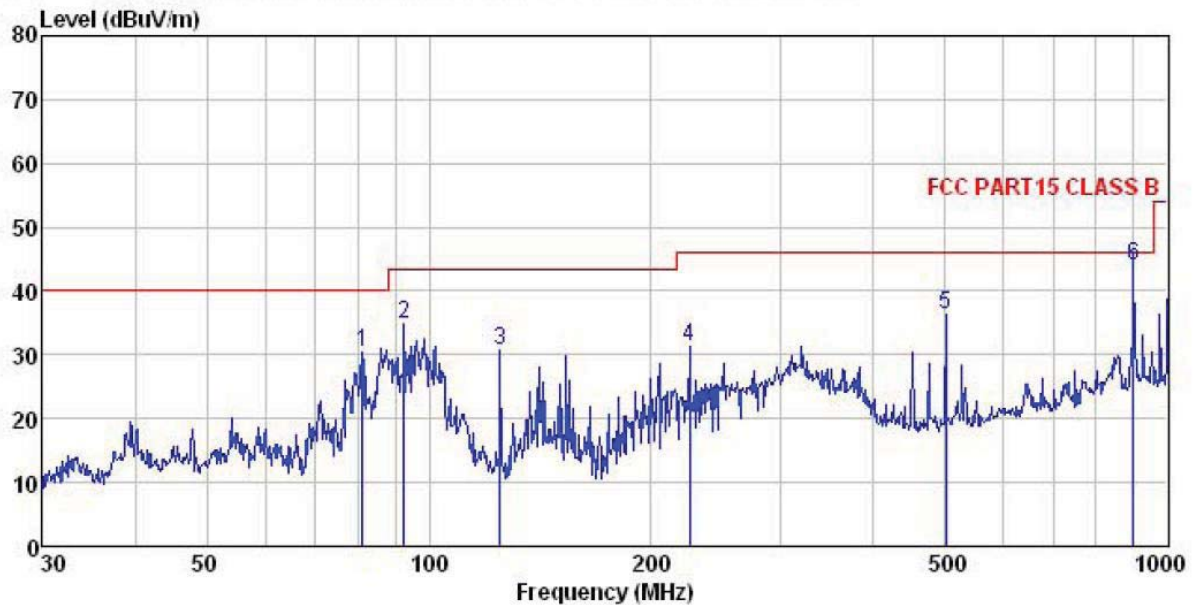

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job No. : 479RF
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : POE: AY012E-ZF243

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	81.212	50.34	8.98	0.86	29.63	30.55	40.00	-9.45 QP
2	92.462	51.08	12.41	0.92	29.56	34.85	43.50	-8.65 QP
3	125.007	49.07	9.70	1.16	29.36	30.57	43.50	-12.93 QP
4	225.308	47.06	11.41	1.51	28.68	31.30	46.00	-14.70 QP
5	501.179	46.28	16.63	2.41	28.96	36.36	46.00	-9.64 QP
6	900.147	47.46	21.09	3.35	27.88	44.02	46.00	-1.98 QP

Vertical:

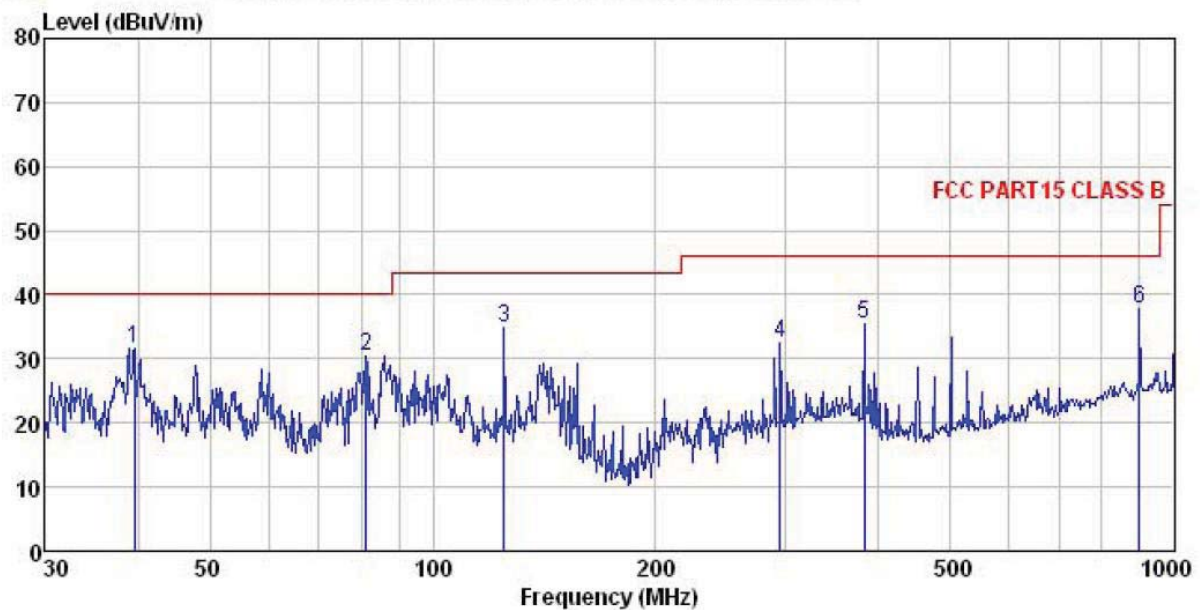

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job No. : 479RF
 EUT : Broadband Digital Transmission System
 Model : DLB 5-15
 Test mode : WIFI TX mode
 Power Rating : AC 120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: Winner
 Remark : POE: AY012E-ZF243

	Freq	ReadAntenna	Cable	Preamplifier	Level	Limit	Over	
	MHz	Level	Factor	Loss Factor	dB	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	39.576	47.57	13.49	0.52	29.90	31.68	40.00	-8.32 QP
2	81.212	50.07	8.98	0.86	29.63	30.28	40.00	-9.72 QP
3	125.007	53.32	9.70	1.16	29.36	34.82	43.50	-8.68 QP
4	294.114	46.18	12.95	1.75	28.46	32.42	46.00	-13.58 QP
5	382.588	47.48	14.68	2.06	28.70	35.52	46.00	-10.48 QP
6	900.147	41.11	21.09	3.35	27.88	37.67	46.00	-8.33 QP

Above 1GHz

Test mode: 802.11a			Test channel: Lowest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.23	40.23	13.81	40.73	51.54	74.00	-22.46	Vertical
11490.00	38.52	40.23	13.81	40.73	51.83	74.00	-22.17	Horizontal
Test mode: 802.11a			Test channel: Lowest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	27.65	40.23	13.81	40.73	40.96	54.00	-13.04	Vertical
11490.00	27.47	40.23	13.81	40.73	40.78	54.00	-13.22	Horizontal

Test mode: 802.11a			Test channel: Middle		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.35	40.17	13.78	40.91	52.39	74.00	-21.61	Vertical
11570.00	39.24	40.17	13.78	40.91	52.28	74.00	-21.72	Horizontal
Test mode: 802.11a			Test channel: Middle		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	28.47	40.17	13.78	40.91	41.51	54.00	-12.49	Vertical
11570.00	28.78	40.17	13.78	40.91	41.82	54.00	-12.18	Horizontal

Test mode: 802.11a			Test channel: Highest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.77	39.75	13.71	41.13	52.10	74.00	-21.90	Vertical
11650.00	39.47	39.75	13.71	41.13	51.80	74.00	-22.20	Horizontal
Test mode: 802.11a			Test channel: Highest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	28.75	39.75	13.71	41.13	41.08	54.00	-12.92	Vertical
11650.00	28.58	39.75	13.71	41.13	40.91	54.00	-13.09	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11n-HT20			Test channel: Lowest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	38.51	40.23	13.81	40.73	51.82	74.00	-22.18	Vertical
11490.00	38.14	40.23	13.81	40.73	51.45	74.00	-22.55	Horizontal
Test mode: 802.11n-HT20			Test channel: Lowest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11490.00	27.53	40.23	13.81	40.73	40.84	54.00	-13.16	Vertical
11490.00	27.59	40.23	13.81	40.73	40.90	54.00	-13.10	Horizontal

Test mode: 802.11n-HT20			Test channel: Middle		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	39.55	40.17	13.78	40.91	52.59	74.00	-21.41	Vertical
11570.00	39.46	40.17	13.78	40.91	52.50	74.00	-21.50	Horizontal
Test mode: 802.11n-HT20			Test channel: Middle		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11570.00	28.36	40.17	13.78	40.91	41.40	54.00	-12.60	Vertical
11570.00	28.47	40.17	13.78	40.91	41.51	54.00	-12.49	Horizontal

Test mode: 802.11n-HT20			Test channel: Highest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	39.28	39.75	13.71	41.13	51.61	74.00	-22.39	Vertical
11650.00	39.48	39.75	13.71	41.13	51.81	74.00	-22.19	Horizontal
Test mode: 802.11n-HT20			Test channel: Highest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11650.00	28.39	39.75	13.71	41.13	40.72	54.00	-13.28	Vertical
11650.00	28.99	39.75	13.71	41.13	41.32	54.00	-12.68	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*” means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11n-HT40			Test channel: Lowest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	38.65	40.25	13.82	40.75	51.97	74.00	-22.03	Vertical
11510.00	38.26	40.25	13.82	40.75	51.58	74.00	-22.42	Horizontal
Test mode: 802.11n-HT40			Test channel: Lowest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11510.00	27.52	40.25	13.82	40.75	40.84	54.00	-13.16	Vertical
11510.00	27.85	40.25	13.82	40.75	41.17	54.00	-12.83	Horizontal

Test mode: 802.11n-HT40			Test channel: Highest		Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	38.65	40.17	13.78	40.91	51.69	74.00	-22.31	Vertical
11590.00	39.15	40.17	13.78	40.91	52.19	74.00	-21.81	Horizontal
Test mode: 802.11n-HT40			Test channel: Highest		Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
11590.00	27.89	40.17	13.78	40.91	40.93	54.00	-13.07	Vertical
11590.00	27.18	40.17	13.78	40.91	40.22	54.00	-13.78	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”*, means average level is not recorded when its peak level is less than average limit.
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*