

Report on the Radio Testing
For
Music Marketing Services Ltd t/a Quail Digital
on
Pro 9 Drive Thru DECT Headset
Report no. TRA-046687-47-00B
17 November 2020

RF914 4.0



Report Number: TRA-046687-47-00B
Issue: B

REPORT ON THE RADIO TESTING OF A
Music Marketing Services Ltd t/a Quail Digital
Pro 9 Drive Thru DECT Headset
WITH RESPECT TO SPECIFICATION
FCC 47CFR 15D

TEST DATE: 5th February - 20th April 2020

Written by: D Winstanley

D Winstanley

Tested by:



Digitally signed by Daniel Winstanley
DN: cn=Daniel Winstanley, o=Element, ou,
email=daniel.winstanley@element.com,
c=GB
Reason: I am the author of this document
Date: 2020.11.17 11:20:13 Z

D Winstanley, S Garwell
Radio Test Engineers

Approved by:



Digitally signed by John Charters
DN: cn=John Charters, o, ou=Element
Materials Technology Ltd.,
email=john.charters@element.com, c=GB
Reason: I am approving this document
Date: 2020.11.17 11:05:44 Z

J Charters
Department manager - Radio

Date: 17 November 2020

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
[2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

RF914 4.0

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	23 October 2020	Original
B	17 November 2020	Antenna Gain updated

2 Summary

TEST REPORT NUMBER: TRA-046687-47-00B

WORKS ORDER NUMBER: TRA-046687-01

PURPOSE OF TEST: USA: Testing of radio frequency equipment per the relevant authorization procedure of chapter 47 of CFR (code of federal regulations) Part 2, subpart J.

TEST SPECIFICATION(S): FCC 47CFR 15D

EQUIPMENT UNDER TEST (EUT): Pro 9 Drive Thru DECT Headset

FCC IDENTIFIER: UDDQP9HS

EUT SERIAL NUMBER: Q801950019, Q801940021

MANUFACTURER/AGENT: Music Marketing Services Ltd t/a Quail Digital

ADDRESS: Unit 6
92 Lots Road
London
SW10 0QD
United Kingdom

CLIENT CONTACT: Stephen Head
☎ 0207 349 2000
✉ stephen.head@quaildigital.com

ORDER NUMBER: 5640

TEST DATE: 5th February - 20th April 2020

TESTED BY: D Winstanley, S Garwell
Element

2.1 Test Summary

TEST/EXAMINATION	Part 15	Result
Coordination with Fixed Microwave Service	15.307 (b)	No Note 1
Antenna Requirement	15.317 15.203	Pass
Modulation Techniques	15.319 (b)	Pass
Conducted AC Powerline	15.315 15.207	No Note 2
Emission Bandwidth	15.323 (a)	Pass
Peak Transmit Power	15.319 (c)	Pass
Power Spectral Density	15.319 (d)	Pass
Antenna Gain	15.319 (e)	Pass
Automatic Discontinuation of Transmission	15.319 (f)	Pass
Radio Frequency Radiation Exposure	15.319 (i)	Pass
Monitoring Thresholds	15.323 (c)(2) 15.323 (c)(9)	Pass
Monitoring of Intended Transmit Window and Maximum Reaction Time	15.323 (c)(1)	Pass
Monitoring Bandwidth	15.323 (c)(7)	Pass
Access Criteria Functional Test	15.323 (c)(6)	Note 3
Duration of Transmission	15.323 (c)(3)	Pass
Connection Acknowledgement	15.323 (c)(4)	Pass
Lower threshold Selected Channel, Power Accuracy, Segment Occupancy	15.323 (c)(5)	Pass
Monitoring Antenna	15.323 (c)(8)	Pass
Duplex Connections	15.323 (c)(10)	Pass
Alternative Monitoring Interval for Co-located Devices	15.323 (c)(11)	Note 4
Fair Access to Spectrum Related to (c)(10) & (c)(11)	15.323 (c)(12)	Note 4
Emission Inside and Outside the Sub-band	15.323 (d)	Pass
Frame Period	15.323 (e)	Pass
Frequency Stability	15.323 (f)	Pass

- Note:
1. Requirement removed April 4th 2005 see public notice DX 05-1005.
 2. The portable part is battery powered only.
 3. The EUT does not transmit control and signalling information.
 4. The EUT does not utilise the provisions of 15.323 (c)(11)

Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record	3
2	Summary	4
2.1	Test Summary	5
3	Contents	7
4	Introduction	9
5	Test Specifications	10
5.1	Normative References	10
5.2	Deviations from Test Standards	10
6	Glossary of Terms	11
7	Equipment Under Test	12
7.1	EUT Identification	12
7.2	System Equipment	12
7.3	EUT Mode of Operation	12
7.3.1	Transmission	12
7.3.2	Reception / Unintentional emissions	12
7.4	EUT Radio Parameters	13
7.4.1	General	13
7.4.2	Antennas	13
7.5	EUT Description	13
8	Modifications	14
9	EUT Test Setup	15
9.1	Block Diagram	15
10	General Technical Parameters	16
10.1	Normal Conditions	16
10.2	Varying Test Conditions	16
11	Antenna Requirements	17
11.1	Definition	17
11.2	Test Limit	17
11.3	Test Result (Attestation)	17
12	Modulation Techniques	18
12.1	Definition	18
12.2	Test Limit	18
12.3	Test Result (Attestation)	18
13	Radio Frequency Radiation Exposure	19
14	Transmitter Emission Bandwidth	20
14.1	Definition	20
14.2	Test Parameters	20
14.3	Test Limit	20
14.4	Test Results	21
15	Peak Transmit Power	23
15.1	Definition	23
15.2	Test Parameters	23
15.3	Test Limit	23
15.4	Test Results	23
16	Power Spectral Density	25
16.1	Definition	25
16.2	Test Parameters	25
16.3	Test Limit	25
17	Antenna Gain	27
17.1	Definition	27
17.2	Test Limit	27
17.3	Test Result (Attestation)	27
18	Automatic Discontinuation of Transmissions	28
18.1	Definition	28
18.2	Test Parameters	28
18.3	Test Limit	28
18.4	Test Results	28
19	Monitoring Thresholds	29
19.1	Definition	29
19.2	Test Parameters	29
19.3	Calculations	29
19.4	Test Limit	29
20	Monitoring of Intended Transmit Window & Maximum Reaction Time	30
20.1	Definition	30
20.2	Test Parameters	30
20.3	Test Method	30
20.4	Test Results	30

21	Monitoring Bandwidth & Antenna	31
21.1	Definition.....	31
21.2	Test Limit	31
21.3	Test Results.....	31
21.3.1	Monitoring Bandwidth	31
21.3.2	Monitoring Antenna.....	31
22	Power Accuracy.....	32
22.1	Definition.....	32
22.2	Test Limit	32
22.3	Test Results.....	32
23	Segment Occupancy	33
23.1	Definition.....	33
23.2	Test Limit	33
23.3	Test Results (Declaration)	33
24	Duration Of Transmission	34
24.1	Definition.....	34
24.2	Test Parameters	34
24.3	Test Limit	34
24.4	Test Results.....	34
25	Connection Acknowledgement	35
25.1	Definition.....	35
25.2	Test Parameters	35
25.3	Test Method.....	35
25.4	Test Results.....	35
26	Least Interfered Channel (LIC) Procedure.....	37
26.1	Definition.....	37
26.2	Test Parameters	37
26.3	Test Method.....	37
26.4	Test Results.....	37
27	Selected Channel Confirmation	38
27.1	Definition.....	38
27.2	Test Parameters	38
27.3	Test Method.....	38
27.4	Test Results.....	38
28	Duplex Connections	39
28.1	Definition.....	39
28.2	Test Parameters	39
28.3	Test Method.....	39
28.4	Test Results.....	39
29	Emissions Inside and Outside the Sub-Band - Conducted	40
29.1	Definition.....	40
29.2	Test Parameters	40
29.3	Test Method.....	40
29.4	Test Results.....	41
30	Emissions Inside and Outside the Sub-Band - Radiated	45
30.1	Definition.....	45
30.2	Test Parameters	45
30.3	Test Limit	45
30.4	Test Method.....	46
30.5	Test Results.....	47
31	Frame Repetition Stability.....	51
31.1	Definition.....	51
31.2	Test Parameters	51
31.3	Test Limit	51
31.4	Test Result	51
32	Frame Period and Jitter	52
32.1	Definition.....	52
32.2	Test Parameters	52
32.3	Test Limit	52
32.4	Test Result	52
33	Frequency Stability	53
33.1	Definition.....	53
33.2	Test Parameters	53
33.3	Test Limit	53
33.4	Test Results.....	53
35	Test Equipment	54
36	Measurement Uncertainty.....	55

4 Introduction

This report TRA-046687-47-00B presents the results of the Radio testing on a Music Marketing Services Ltd t/a Quail Digital, Pro 9 Drive Thru DECT Headset to specification 47CFR15 Radio Frequency Devices.

The testing was carried out for Music Marketing Services Ltd t/a Quail Digital by Element, at the addresses detailed below.

☐	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	☒	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

ISED Registration Number(s):

Element Skelmersdale	3930B
Element Hull	3483A

The test site requirements of ANSI C63.4-2014 are met up to 1 GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Test Specifications

5.1 Normative References

- FCC 47 CFR Ch. I – Part 15 – Radio Frequency Devices.
- ANSI C63.10-2013 – American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
- ANSI C63.4-2014 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- ANSI C63.17-2013 - American National Standard Methods of Measurement of the Electromagnetic and Operational Compatibility of Unlicensed Personal Communications Services (UPCS) Devices
- Industry Canada RSS-213, Issue 3, March 2015 – 2 GHz Licence-Exempt Personal Communications Services (LE-PCS) Devices.
- Industry Canada RSS-Gen, Issue 5, March 2019 – General Requirements for Compliance of Radio Apparatus

5.2 Deviations from Test Standards

There were no deviations from the test standard.

6 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada (now ISED)
ISED	Innovation, Science and Economic Development Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

7 Equipment Under Test

7.1 EUT Identification

- Name: Pro 9 Drive Thru DECT Headset
- Serial Number: Q801950019, Q801940021
- Software Revision: 7194 (Radio)
- Build Level / Revision Number: 1.6.1

7.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

The following Element support equipment was used

Type	–	Digital Radiocommunication Tester
Model	–	CMD60
Reference number	–	RFG433

The following support equipment was provided by the manufacturer

Type	–	HP Laptop
Serial	–	CND9294D2B
Type	–	USB to Serial Adaptor

7.3 EUT Mode of Operation

7.3.1 Transmission

The mode of operation for transmitter tests was as follows...

The EUT was set into transmit mode via a serial interface. A command sequence was used to set the unit transmitting on the required antenna and frequency.

For limited testing the device was also connected to a CMD60 test set

7.3.2 Reception / Unintentional emissions

The mode of operation for receive tests was as follows...

EUT was set to receive on the required channel

7.4 EUT Radio Parameters

7.4.1 General

Band of operation:	1920 MHz – 1930 MHz
Frequency range of operation:	1921.536 MHz – 1928.448 MHz
Modulation type(s):	GFSK
Occupied channel bandwidth(s):	1.55 MHz
Channel spacing:	1.728 MHz
ITU emission designator(s):	F1D
Declared output power(s):	<112 mW
Warning against use of alternative antennas in user manual (yes/no):	Not Applicable
Nominal Supply Voltage:	3.0 Vdc
Location of notice for license exempt use:	Label / user manual / both.
Duty cycle:	8.3 %

7.4.2 Antennas

Type:	1.52 mm diameter inner conductor and dielectric from RG316
Frequency range:	1880 MHz – 1930 MHz
Impedance:	50 Ohms
Gain:	2 dBi
Polarisation:	Omni

7.5 EUT Description

The EUT is a UPCS Headset used are part of the ordering system in a drive through environment.


8 Modifications

No modifications were performed during this assessment.

9 EUT Test Setup

9.1 Block Diagram

The following diagram shows basic EUT interconnections with cable type and cable lengths identified:

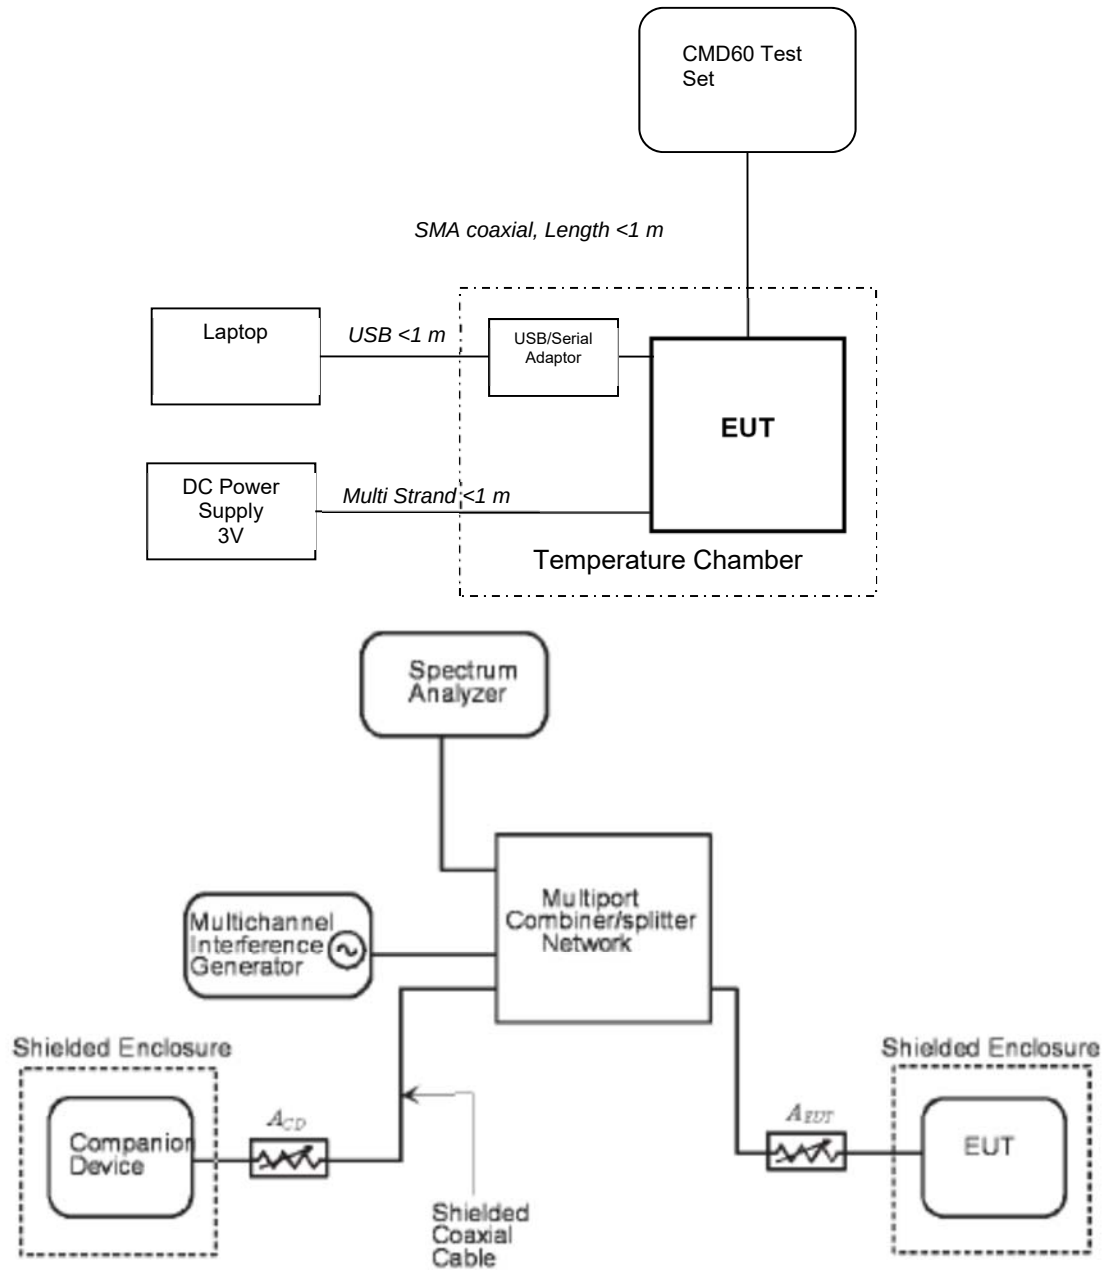

10 General Technical Parameters

10.1 Normal Conditions

The E U T was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was 3.7 V dc from a PSU or 3.7 V dc from Li-ion.

10.2 Varying Test Conditions

Variation of temperature is required to ensure stability of the declared fundamental frequency. During frequency error testing the following variations were made:

	Category	Variation
☒	Standard	-20 to +50 C
☐	Extended	

Variation of supply voltage is required to ensure stability of the declared output power and frequency. During carrier power and frequency error testing the following variations were made:

	Category	Nominal	Variation
☐	Mains	110 V ac +/-2 %	85 % and 115 %
☒	Battery	New battery	Not Applicable

11 Antenna Requirements

11.1 Definition

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

11.2 Test Limit

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

11.3 Test Result (Attestation)

The unit employs an integral antenna arrangement.

12 Modulation Techniques

12.1 Definition

All transmissions must use only digital modulation techniques.

12.2 Test Limit

Attestation of compliance with the digital modulation requirement will be made in accordance with the disclosure statement required by the applicable equipment authorization procedures (see, e.g., 47CFR2).

12.3 Test Result (Attestation)

The Music Marketing Services Ltd t/a Quail Digital UK Limited Pro 9 Drive Thru DECT Headset is an isochronous device operating in the 1920 MHz – 1930 MHz frequency band.

The Music Marketing Services Ltd t/a Quail Digital UK Limited Pro 9 Drive Thru DECT Headset modulation technique is based on DECT technology as described in European standards EN 300 175-2 and EN 300 175-3.

The Music Marketing Services Ltd t/a Quail Digital UK Limited Pro 9 Drive Thru DECT Headset modulation techniques are MC/TDMA/TDD (Multi Carrier / Time Division Multiple Access / Time Division Duplex) using GFSK modulation.

13 Radio Frequency Radiation Exposure

This requirement is covered under an alternative report – test report ELEM0101.

14 Transmitter Emission Bandwidth

14.1 Definition

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

14.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 6.1.3
Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Measurement BW:	20 kHz
Spectrum Analyzer Video BW:	200 kHz
Measurement Span:	3 MHz
Measurement Detector:	Peak

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 42 % RH	20 % RH to 75 % RH (as declared)

14.3 Test Limit

Operation shall be contained within the 1920 MHz to 1930 MHz band. The emission bandwidth shall be less than 2.5 MHz but in no event shall the emission bandwidth be less than 50 kHz.

The emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier centre frequency and one above the carrier centre frequency, that are 26 dB down relative to the maximum level of the modulated carrier.


14.4 Test Results

Test Details: $f_i = 1921.536$ MHz				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1920.843051	1922.202025	1.359	50kHz< Δf <2.5MHz


Test Details: $f_c = 1924.992$ MHz				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1924.299051	1925.654820	1.356	50kHz< Δf <2.5MHz

Test Details: $f_h = 1928.448$ MHz				
ΔP (dBc)	f_l (MHz)	f_h (MHz)	Δf (MHz)	Limit
-26	1927.752487	1929.111462	1.359	50kHz< Δf <2.5MHz


26 dB Emission Bandwidth

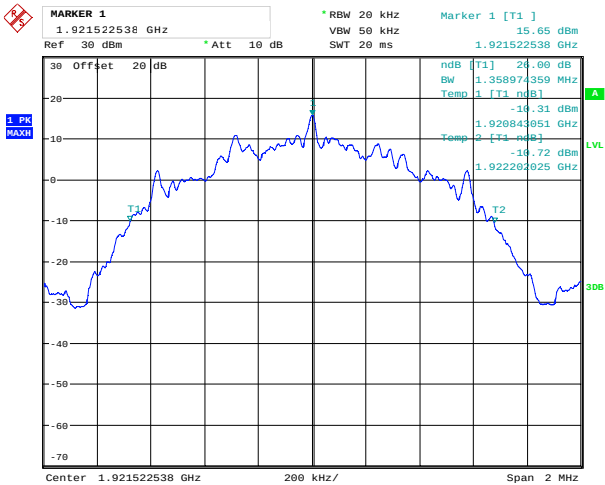

f_i

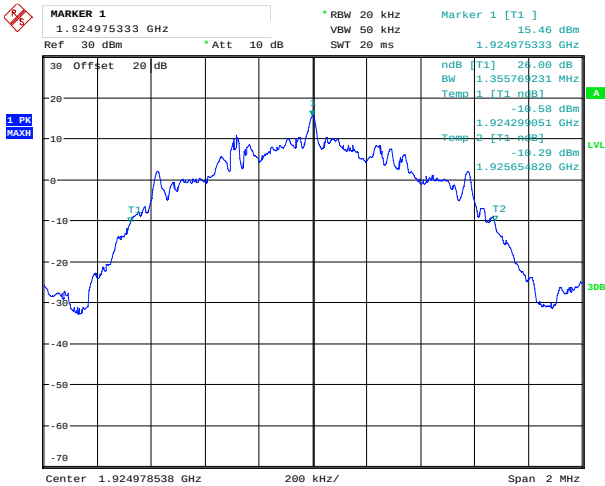

f_c

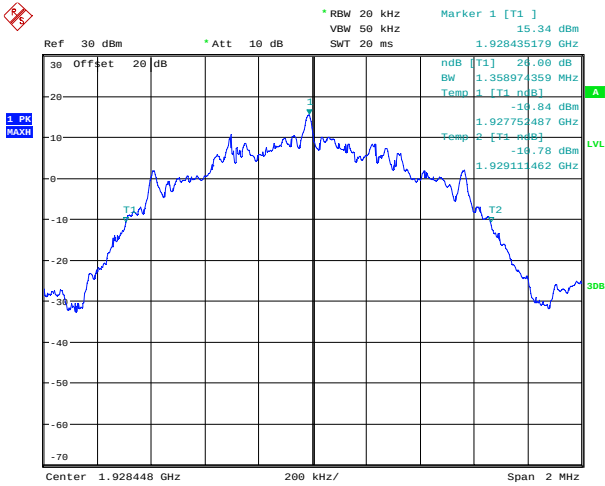

f_h

15 Peak Transmit Power

15.1 Definition

The peak transmit power is the maximum of the RMS power during a transmit burst

15.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 6.1.2
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	Low / Mid / High
EUT Occupied Bandwidths:	1.36 MHz
Measurement BW:	3 MHz
Measurement Span:	Zero Span
Measurement Detector:	RMS

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 42 % RH	20 % RH to 75 % RH (as declared)

15.3 Test Limit

Peak transmit power shall not exceed 100 µW multiplied by the square root of the emission bandwidth in hertz

The limit for Peak Transmit Power (PTP) is calculated using the following formula:

$$PTP = 5 \log_{10} EBW - 10 \text{ dBm}$$

This limit must be corrected to take into account any gain of the antenna greater than 3dBi.
Where: EBW is the transmitter emission bandwidth in Hz as determined in the previous test.

$$EBW = 1.36 \text{ MHz}$$


$$PTP = 5 \log_{10} 1.36 - 10 \text{ dBm}$$

$$PTP = 20.67 \text{ dBm}$$

15.4 Test Results

Frequency (MHz)	Peak Transmit Power (dBm)		Limit (dBm)
	Antenna 0	Antenna 1	
1921.536	17.92	17.74	20.67
1924.992	18.03	17.72	20.67
1928.448	18.13	17.73	20.67


Note: 1. Permanent antenna was replaced with temporary antenna connector to enable conducted measurement.
2. Antenna gain < 3dBi and so correction of the limit is not required.
3. Antenna 0 is used for subsequent measurements at the temporary antenna port.

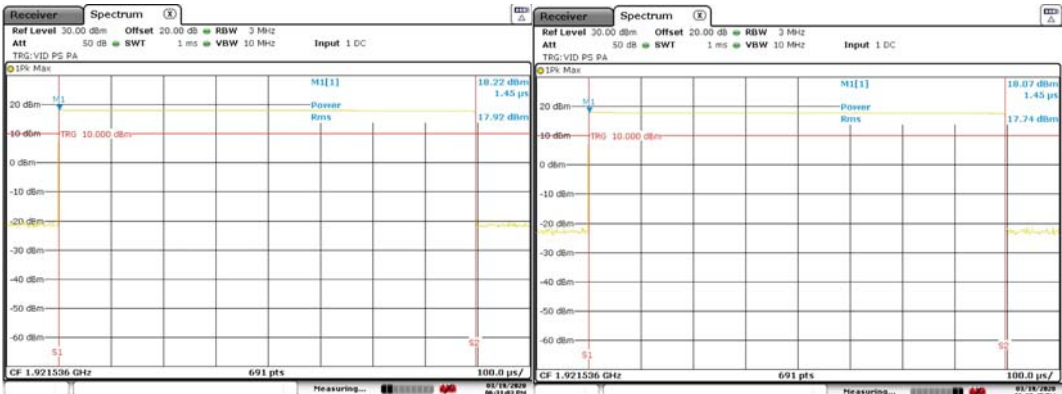

Antenna 0

f_i


Antenna 1

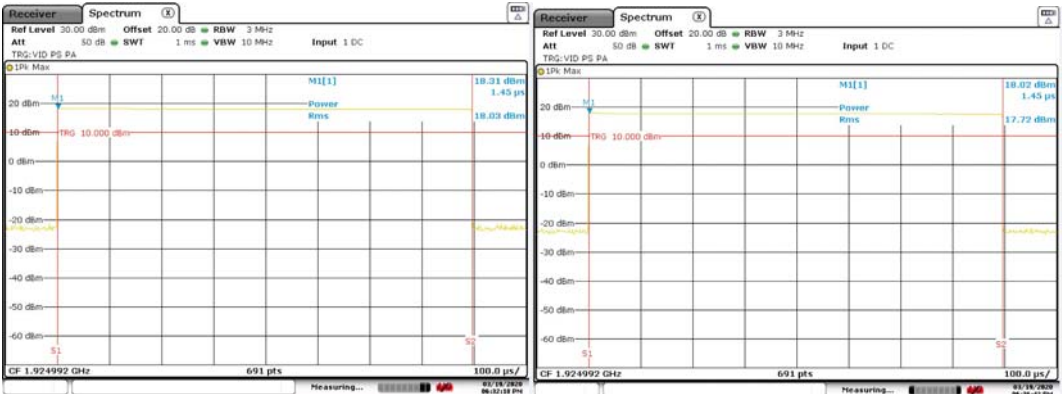

Antenna 0

f_c

Antenna 1

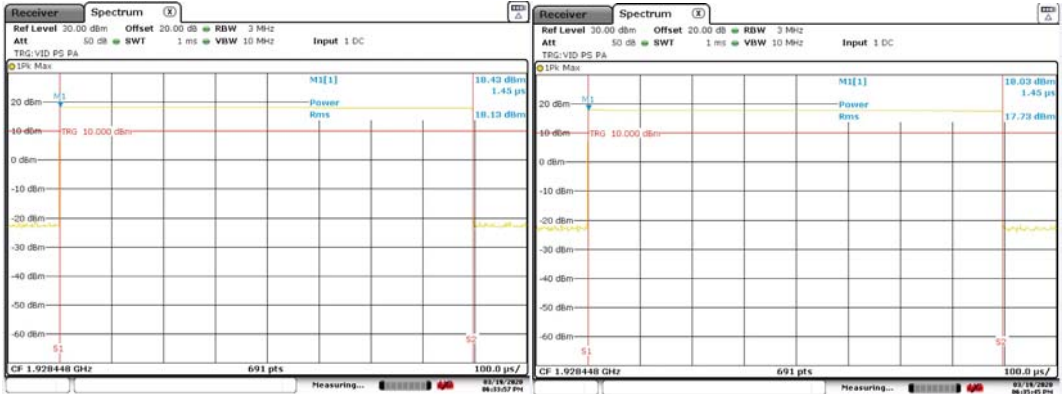

Antenna 0

f_h

Antenna 1

16 Power Spectral Density

16.1 Definition

The power per unit bandwidth.

16.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 6.1.5
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	Low / Mid / High
EUT Occupied Bandwidths:	1.36 MHz
Measurement BW:	3 kHz
Measurement Span:	Zero Span
Measurement Detector:	Sample

Environmental Conditions (Normal Environment)




Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 42 % RH	20 % RH to 75 % RH (as declared)

16.3 Test Limit

The power spectral density shall not exceed 3mW in any 3 kHz bandwidth as measured with a spectrum analyser having a resolution bandwidth of 3 kHz.

Frequency (MHz)	Power Spectral Density (mW/3kHz)	Limit (mW/3kHz)
1921.536	0.84	3
1924.992	0.89	3
1928.448	0.82	3

Note: 1. Permanent antenna was replaced with temporary antenna connector to enable conducted measurement.
2. Antenna gain < 3dBi and so correction of the limit is not required.

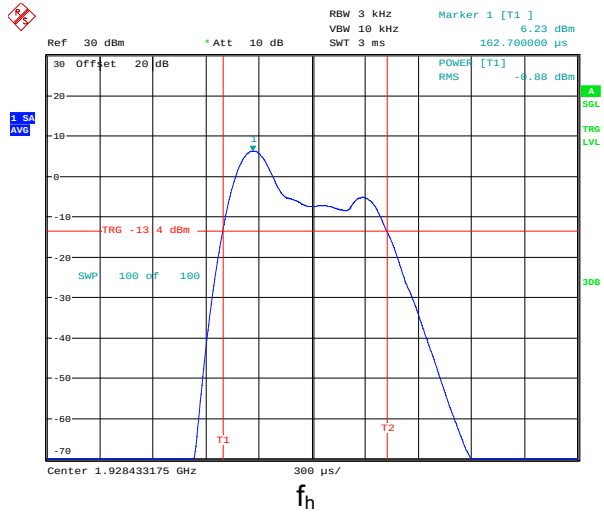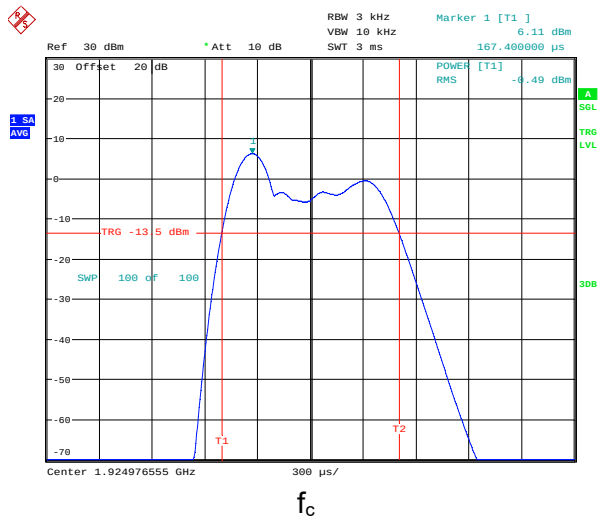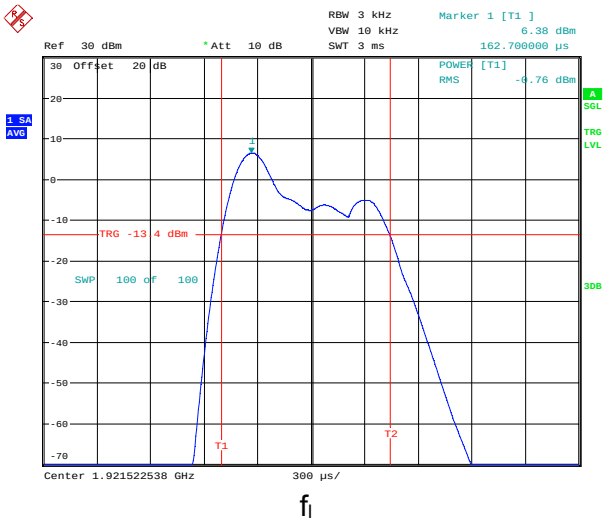

17 Antenna Gain

17.1 Definition

Any directional gain of the antenna exceeding 3dBi has an effect on the limit applied to the measurements taken for the peak transmit power test. If the directional gain of the antenna is less than 3dBi it is not required to be taken into account.

17.2 Test Limit

The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

17.3 Test Result (Attestation)

Maximum Antenna Gain	Exceeds 3dBi by
2 dBi	N/A

Antenna Gain declared by Manufacturer

18 Automatic Discontinuation of Transmissions

18.1 Definition

Automatic discontinuation of transmission means break off of transmissions that are not control and signalling information.

18.2 Test Parameters

Test Location: Element Skelmersdale
 Test Chamber: Radio Lab
 EUT Channels / Frequencies Measured: Mid

Environmental Conditions (Normal Environment)

Temperature: 22 °C +15 °C to +35 °C (as declared)
 Humidity: 42 % RH 20 % RH to 75 % RH (as declared)

18.3 Test Limit

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signalling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

18.4 Test Results

The EUT is a Portable part and as such does not transmit control and signalling information the counterpart device is a fixed part device and does transmit control and signalling information.

Part	Transmits Control and Signalling Information	Equipment Under Test
Fixed Part	X	
Portable Part		X

The following tests were performed after a connection had been established with the counterpart device

Number	Test	Reaction of EUT	Pass / Fail
1	Power removed from EUT	A	Pass
2	Power removed from Companion	C	Pass
3	Hang Up Button Pressed	C	Pass

A – Connection breakdown, Cease of all transmissions.
 B – Connection breakdown, EUT transmits control and signalling information.
 C – Connection breakdown, Counterpart transmits control and signalling information.

19 Monitoring Thresholds

19.1 Definition

The spectrum sharing rules require that EUTs monitor their intended channel (time and spectrum window) prior to transmission to sense RF energy in the channel. If there is RF energy above the monitoring limit threshold the EUT must either defer transmission until the channel is clear or select another clear channel.

19.2 Test Parameters

Measurement standard - Calculation	ANSI C63.17 sub-clause 7.2.1
Calculations	As laid out in ANSI C63.17 sub-clause 4.3.3
Measurement standard	ANSI C63.17 sub-clause 7.3
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab

19.3 Calculations

Calculation of monitoring threshold limits for isochronous devices:

$$\text{Threshold level: } T_L \leq -174 + 10\log_{10}B + M_L + P_{MAX} - P_{EUT} \text{ (dBm)}$$

Where:	B	= Emission bandwidth (Hz)
	M_L	= dBs the threshold may exceed thermal noise
	P_{MAX}	= Output Power Limit (dBm)
	P_{EUT}	= Transmitted power (dBm)

Monitor Threshold	B (Hz)	M_L (dB)	P_{MAX} (dBm)	P_{EUT} (dBm)	Threshold (dBm)
T_L	1358975.00	30.00	20.67	18.13	-80.13

Note: 1. Threshold levels rounded up/down

The threshold level was determined following the procedure as laid out in ANSI C63.17 sub-clause 7.3.1 (a) Frequency administration was used to allow operation on the carrier closest to the centre of the band.

19.4 Test Limit

The EUT must not transmit until the interference level is less than or equal to:

$$\text{Measured Threshold Level} \leq T_L + U_M$$

Where:	T_L	= Calculated threshold level
	U_M	= Margin of uncertainty in threshold measurements (6dB)

Results

Measured Threshold Level	Limit	Pass/Fail
-77.13 dBm	-74.13 dBm	Pass

20 Monitoring of Intended Transmit Window & Maximum Reaction Time

20.1 Definition

The reaction time is the minimum duration of the interference present during the monitoring interval that must be detected by the EUT so as to determine that the monitored time and spectrum window is occupied.

20.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 7.5
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	f1 - 1923.264 MHz ; f2 – 1926.720MHz

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 42 % RH	20 % RH to 75 % RH (as declared)

20.3 Test Method

The EUT was restricted to operation on two channels. The interference generator was fed pulses from the function generator to produce a pulsed carrier of the specified time length and the output of the interference generator was set to the required level. The pulse generator and companion device were synchronized so the position of the pulses corresponded to the time-slot pattern in the frame of the EUT.

For each of the required tests the pulse width and interference level are as below:

Test c)

Apply time-synchronized, pulsed interference on f_1 at the pulsed level $T_L + U_M$ to the receive port of the EUT the width of the pulse the largest of $50\mu\text{s}$ and $50\sqrt{1.25/B} \mu\text{s}$. Additionally apply a CW signal on f_2 at the level T_L to the receive port of the EUT. Verify that the EUT establishes a connection only on f_2 .

Test d)

Apply time-synchronized, pulsed interference on f_1 at the pulsed level $T_L + U_M + 6\text{dB}$ to the receive port of the EUT the width of the pulse the largest of $35\mu\text{s}$ and $35\sqrt{1.25/B}$. Additionally apply a CW signal on f_2 at the level T_L to the receive port of the EUT. Verify that the EUT establishes a connection only on f_2 .

Where B = Emission bandwidth of the EUT in MHz

20.4 Test Results

Test Equation (μs)	Pulse Width (μs)	f_1 Interferer Level (dBm)	f_2 Interferer Level (dBm)	EUT transmission Frequency	Pass/Fail
$50\sqrt{1.25/B}$	$50\mu\text{s}$	$T_L + U_m$	T_L	f_2	Pass
$35\sqrt{1.25/B}$	$35\mu\text{s}$	$T_L + U_m + 6$	T_L	f_2	Pass

- Notes:
1. T_L is the calculated Lower threshold.
 2. U_M is Margin of uncertainty in threshold measurements (6dB).

21 Monitoring Bandwidth & Antenna

21.1 Definition

The methods implemented for checking whether the spectrum is occupied or not.

21.2 Test Limit

ANSI C63.17 sub-clause 7.4 states that if the monitoring is made through the radio receiver used by the EUT for communication the intended bandwidth requirements for the monitoring system are met.

21.3 Test Results

The monitoring bandwidth test was carried out in accordance with ANSI C63.17 sub-clause 7.4.

21.3.1 Monitoring Bandwidth

As declared by the manufacturer the EUT uses the radio receiver used for communication for monitoring therefore the intended bandwidth requirements for the monitoring system are met of ANSI C63.17 sub-clause 7.4 are met.

21.3.2 Monitoring Antenna

The antenna of the EUT used for transmitting is the same antenna that is used for monitoring.

22 Power Accuracy

22.1 Definition

Checks that a power level can be determined within a set margin.

22.2 Test Limit

The power measurement resolution for the previous comparison must be accurate to within 6dB.

22.3 Test Results

The monitoring threshold test covered in Part 15.323 (c)(2) automatically proves that this requirement is met.

23 Segment Occupancy

23.1 Definition

To ensure that any group of devices does not utilise more than a maximum amount of time / spectrum

23.2 Test Limit

No device or group of co-operating devices located within 1 m of each other shall, during any frame period, occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

23.3 Test Results (Declaration)

See manufacture Declaration

From: Tim Whittaker <tim.whittaker@cambridgeconsultants.com>
Sent: 22 October 2020 13:24
To: Stephen Head <stephen.head@quaildigital.com>
Cc: Stephen McBride <Stephen.McBride@quaildigital.com>; Mike Rudin <mike.rudin@cambridgeconsultants.com>
Subject: Re: Quail P3169 FW: TRA-046687 Portable Part (File: P3169)

Hi Stephen

We concur that the declaration describes the system correctly:

15.323(c)(5).4

No device or group of co-operating devices located within 1 m of each other shall, during any frame period, occupy more than 6 MHz of aggregate bandwidth, or alternatively, more than one third of the time and spectrum windows defined by the system.

24 Duration Of Transmission

24.1 Definition

The amount of time a device uses a channel without repeating access criteria

24.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 8.2.2
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1924.992 MHz

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)

24.3 Test Limit

The EUT shall not continue to use the same channel without executing the access criteria at least as often as every 8 hours.

24.4 Test Results

Repetition of Access Criteria	Maximum Transmission Time (Hours:Minutes:Seconds)	Maximum Transmission Time Limit	Pass/Fail
Period	7:09:08	<8 Hours	Pass

25 Connection Acknowledgement

25.1 Definition

To verifies that the two devices communicating over a duplex connection comply with the access criteria.

25.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 8.2.1
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1924.992 MHz

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)


25.3 Test Method

The test was carried out in two parts. The first was to verify that with the companion device off (no initial acknowledgement received) the EUT does not transmit on the same time/spectrum window for more than the limit. The second was to verify that after a connection is broken the EUT terminates its transmission on the current communication channel within 30 seconds or less.


25.4 Test Results

Test	Time Taken (seconds)	Limit (seconds)	Pass/Fail
Transmission on communications channel no acknowledgement received (note 1)	0.379	1	Pass
EUT starting Activation, acknowledgement blocked from companion	0.336	30	Pass
EUT responding to Activation, acknowledgement blocked from companion	28.28	30	Pass


Note: 1. The companion device transmits a beacon signal when acknowledgements are blocked.
2. The EUT does not transmit a control channel.

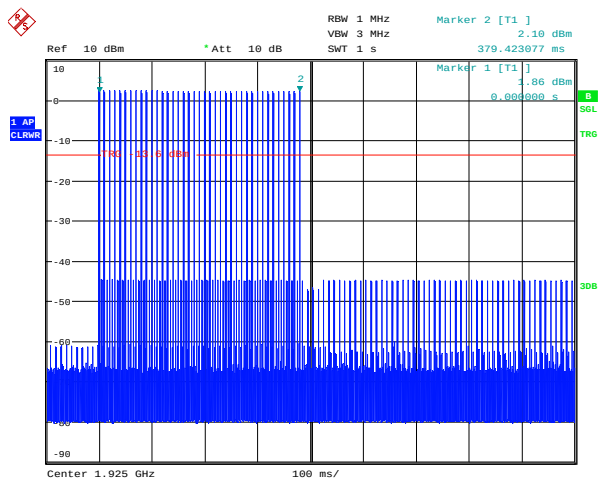

Transmissions on Communications Channel - Initial Acknowledgement Not Received

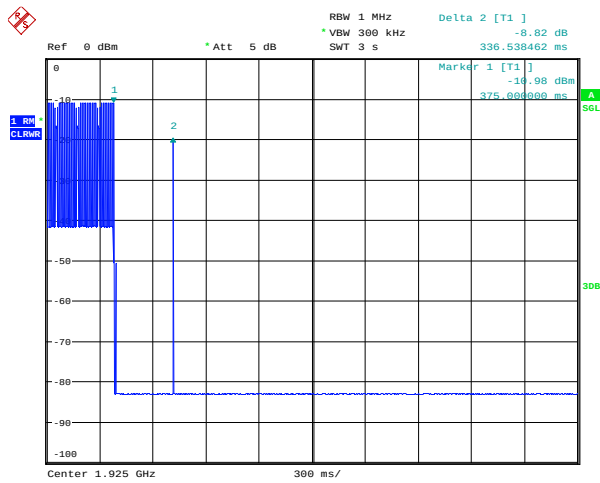

Activating EUT, acknowledgement blocked from companion

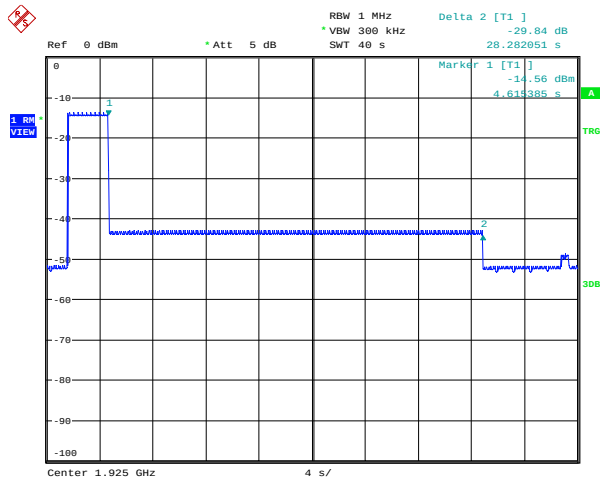

Responding EUT, acknowledgement blocked from companion

26 Least Interfered Channel (LIC) Procedure

26.1 Definition

To determine that an EUT is operating in the LIC mode can properly select the channel with the lowest interference power, within a 6 dB resolution

26.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 7.3.2
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1924.992 MHz (f1) / 1926.720 MHz(f2)

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)

26.3 Test Method

The EUT was restricted to operating on two frequencies only, designated f1 and f2.

Test b)

Interference on f1 was set at $T_L + U_M + 7\text{dB}$ and at $T_L + U_M$ on f2. Initiate communication. The EUT should transmit on f2. Repeat 5 times. If the EUT transmits on f1 the test is failed.

Test c)

Interference on f1 was set at $T_L + U_M$ and at $T_L + U_M + 7\text{dB}$ on f2. Initiate communication. The EUT should transmit on f1. Repeat 5 times. If the EUT transmits on f2 the test is failed.

Test d)

Interference on f1 was set at $T_L + U_M + 1\text{dB}$ and at $T_L + U_M - 6\text{dB}$ on f2. Initiate communication. The EUT should transmit on f2. Repeat 5 times. If the EUT transmits on f1 the test is failed.

Test e)

Interference on f1 was set at $T_L + U_M - 6\text{dB}$ and at $T_L + U_M + 7\text{dB}$ on f2. Initiate communication. The EUT should transmit on f1. Repeat 5 times. If the EUT transmits on f2 the test is failed.

26.4 Test Results

The EUT does not implement the provisions of 47CFR15.323(c)(5) regarding the process of selecting the least interfered channel (LIC). There are fewer than 20 duplex channels offered, 15 carrier-timeslot combinations.

27 Selected Channel Confirmation

27.1 Definition

To determine that an EUT monitors the selected channel immediately prior to transmission. The test described as follows is intended to verify that the EUT makes its channel selection decision on the basis of a recent power level reading

27.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 7.3.3
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1923.264 MHz (f1) / 1926.720 MHz (f2)

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)

27.3 Test Method

The EUT was Restricted to operating on two frequencies only, f1 and f2.

Test a)

Interference is applied on f1 at a level of $T_L + U_M + 20$ dB. Verify a connection is established on f2.

Any connection is terminated.

Test b)

Interference is applied on f2 at a level of $T_L + U_M + 20$ dB and immediately removed from f1 and the EUT is immediately caused to attempt transmission. In this case the EUT should transmit on f1

The test is applied in both single and long slot configurations.

27.4 Test Results

Test	Transmit on f1	Transmit on f2	Wanted Transmit Channel	Pass/Fail
a	No	Yes	f2	Pass
b	Yes	No	f1	Pass

28 Duplex Connections

28.1 Definition

To determine that an EUT monitors the selected channel immediately prior to transmission. The test described as follows is intended to verify that the EUT makes its channel selection decision on the basis of a recent power level reading

28.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 8.3.2
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1924.992 MHz
Interference Free Receive slots:	2 & 3
Interference Free Transmit slots:	10 & 11

Environmental Conditions (Normal Environment)

Temperature: 23 °C	+15 °C to +35 °C (as declared)
Humidity: 44 % RH	20 % RH to 75 % RH (as declared)

28.3 Test Method

Before all tests are carried out any connection is terminated.

Test b)

The system is restricted to operation on one frequency (1924.992 MHz) using administration. Verify that a connection between the EUT and its companion device can be made.

Test c) & d)

Apply interference at a level $T_L + U_M$ to all receive time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M$ to all transmit time slots. Cause the EUT to attempt to establish a connection. If a connection is established the test is failed.

Test e) & f)

Apply interference at a level $T_L + U_M$ to all transmit time slots except one which has interference at least 10dB below T_L . Apply interference at a level $T_L + U_M$ to all receive time slots. Cause the EUT to attempt to establish a connection. If a connection is established the test is failed.

28.4 Test Results

Test	Connection Made	Pass/Fail
b	Yes	Pass
c & d	No	Pass
e & f	No	Pass

29 Emissions Inside and Outside the Sub-Band - Conducted

29.1 Definition

In-Band Emissions

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the operating band that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude in-band and out-of-band emissions.

29.2 Test Parameters

Measurement standard	ANSI C63.17 sub-clause 6.1.6
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1921.536 MHz / 1928.448 MHz

29.3 Test Method


With the EUT setup as per section 9 of this report and connected as per Figure v, the emissions from the EUT were measured on a spectrum analyser.

The measurements were performed with EUT set at its maximum duty. All modulation schemes, data rates and power settings were used to observe the worst case configuration in each bandwidth.


29.4 Test Results

RF carrier set to the lowest carrier defined by the EUT					
Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE & ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz	Not Applicable – Radiated testing performed				
- 1.25 MHz – 2.5 MHz	1918.593	-72.95	20	-52.95	-29.5
- 1.25 MHz	1920.000	-64.96	20	-44.96	-9.5
In-band Emissions	See plot				
+ 1.25 MHz	1930.010	-79.36	20	-59.36	-9.5
+ 1.25 MHz – 2.5 MHz	1931.884	-73.03	20	-53.03	-29.5
> + 2.5MHz	Not Applicable – Radiated testing performed				
Limits	Out-of-Band Emissions From UPCS bandedge		Attenuation (dB) required below Reference power of 112mW		
	± 1.25MHz		30		
	±1.25 MHz – 2.5 MHz		50		
	> ±2.5MHz		60		
	In band Emissions from centre of emission bandwidth		Attenuation (dB) required below permitted peak power for the EUT		
	1B – 2B		30		
	2B – 3B		50		
	3B – UPCS band edge		60		


Emissions inside the Sub-Band RF carrier set to the lowest carrier defined by the EUT

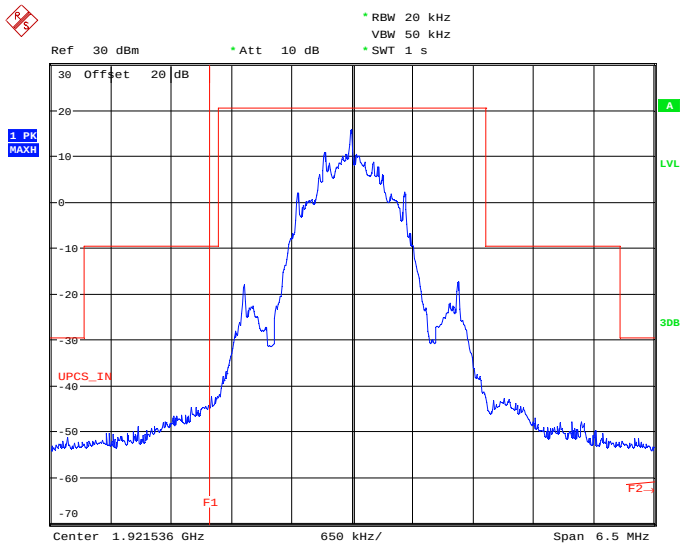

Conducted Emissions outside the Sub-Band RF carrier set to the lowest carrier defined by the EUT

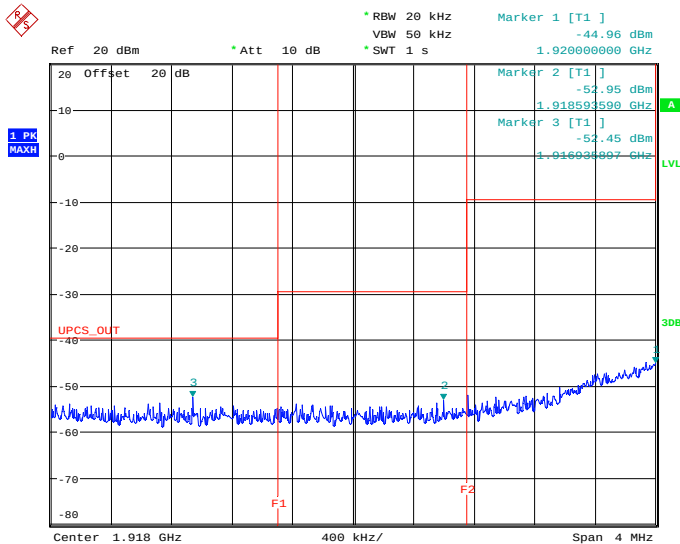

Lower Bandedge - > 2.5MHz

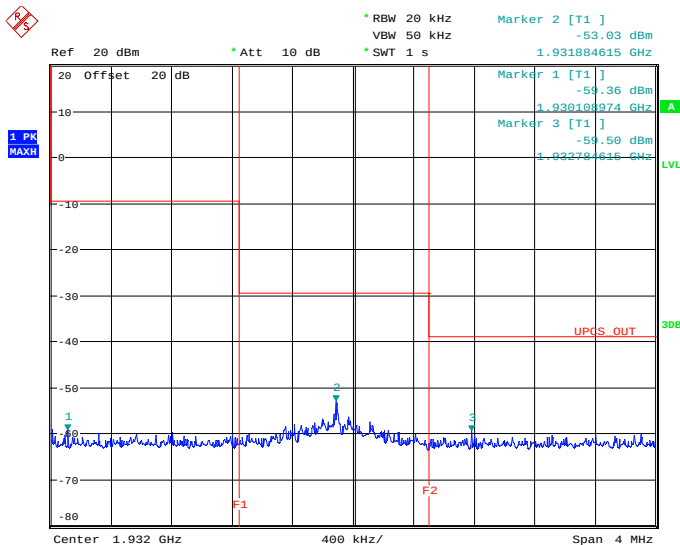

Upper Bandedge - > 2.5MHz

RF carrier set to the highest carrier defined by the EUT					
Out-of-Band Emissions from UPCS bandedge	FREQ. (MHz)	MEAS. Rx. (dBm)	CABLE & ATTEN. LOSS (dB)	EMISSION LEVEL (dBm)	LIMIT (dBm)
> - 2.5MHz	Not Applicable – Radiated testing performed				
- 1.25 MHz – 2.5 MHz	1918.077	-76.23	20	-56.23	-29.5
- 1.25 MHz	1919.942	-79.40	20	-59.40	-9.5
In-band Emissions	See plot				
+ 1.25 MHz	1930.128	-63.49	20	-43.49	-9.5
+ 1.25 MHz – 2.5 MHz	1931.469	-74.41	20	-54.41	-29.5
> + 2.5MHz	Not Applicable – Radiated testing performed				
Limits	Out-of-Band Emissions From UPCS bandedge		Attenuation (dB) required below Reference power of 112mW		
	± 1.25MHz		30		
	±1.25 MHz – 2.5 MHz		50		
	> ±2.5MHz		60		
	In band Emissions from centre of emission bandwidth		Attenuation (dB) required below permitted peak power for the EUT		
	1B – 2B		30		
	2B – 3B		50		
	3B – UPCS band edge		60		

30 Emissions Inside and Outside the Sub-Band - Radiated

30.1 Definition

In-Band Emissions

Emission on a frequency or frequencies immediately outside the necessary bandwidth that results from the modulation process but excluding spurious emissions.

Out-of-band emission.

Emission on a frequency or frequencies immediately outside the operating band that results from the modulation process but excluding spurious emissions.

Spurious emission.

Emission on a frequency or frequencies that are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products, and frequency conversion products, but exclude in-band and out-of-band emissions.

30.2 Test Parameters

Test Standard and Clause:	ANSI C63.17 sub-clause 6.1.6. ANSI C63.10-2013, Clause 6.5 and 6.6
Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
EUT Channels / Frequencies Measured:	Low / High
Deviations From Standard:	None
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: RMS average and Peak

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

30.3 Test Limit

Emissions from license-exempt transmitters shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits for License-Exempt Transmitters at Frequencies above 30 MHz

<i>Frequency (MHz)</i>	<i>Field Strength (μV/m at 3 m)</i>
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

30.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure ii, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver.

Radiated electromagnetic emissions from the EUT are checked first by preview scans. Preview scans for all spectrum and modulation characteristics are checked, using a peak detector and where applicable worst-case determined for function, operation, orientation, etc. for both vertical and horizontal polarisations. Pre-scan plots are shown with a peak detector and 100 kHz RBW.

If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.10 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed, (see EUT setup photographs for more detail).

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Pre-amplifiers and filters are used where required. Care is taken to ensure that test receiver resolution bandwidth, video bandwidth and detector type(s) meet the regulatory requirements.

For both horizontal and vertical polarizations, the EUT is then rotated through 360 degrees in azimuth until the highest emission is detected. At the previously determined azimuth the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected, this maximum value is recorded.

Power values measured on the test receiver / analyzer are converted to field strength, FS, in dB μ V/m at the regulatory distance, using:

$$FS = PR + CL + AF - PA + DC - CF$$

$$\text{Factor} = CL + AF - PA$$

Where,

PR is the power recorded on the receiver / spectrum analyzer in dB μ V;

CL is the cable loss in dB;

AF is the test antenna factor in dB/m;


PA is the pre-amplifier gain in dB (where used);

DC is the duty correction factor in dB (where used, e.g. harmonics of pulsed fundamental);

CF is the distance factor in dB (where measurement distance is different to limit distance);


This field strength value is then compared with the regulatory limit.

Figure ii Test Setup

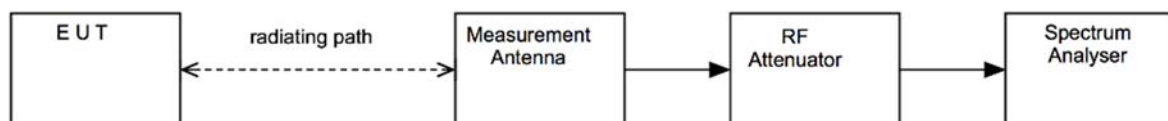


30.5 Test Results


Antenna 0												
RF carrier set to the lowest carrier defined by the EUT												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
165.885	43.1	-11.8	1.0	75.0	3.0	0.0	Vert	QP	0.0	31.3	43.5	-12.2
175.078	40.5	-12.3	1.0	272.0	3.0	0.0	Vert	QP	0.0	28.2	43.5	-15.3
177.138	39.8	-12.3	1.0	104.0	3.0	0.0	Vert	QP	0.0	27.5	43.5	-16.0
30.203	28.2	-4.3	1.5	142.0	3.0	0.0	Vert	QP	0.0	23.9	40.0	-16.1
30.220	28.0	-4.3	1.28	168.9	3.0	0.0	Horz	QP	0.0	23.7	40.0	-16.3
172.024	39.1	-12.2	1.0	240.0	3.0	0.0	Vert	QP	0.0	26.9	43.5	-16.6
3842.993	41.0	2.3	1.0	180.0	3.0	0.0	Horz	AV	0.0	43.3	54.0	-10.7
3843.502	60.2	2.3	1.0	180.0	3.0	0.0	Horz	PK	0.0	62.5	74.0	-11.5
3843.018	38.2	2.3	1.5	215.9	3.0	0.0	Vert	AV	0.0	40.5	54.0	-13.5
3843.677	55.9	2.3	1.5	215.9	3.0	0.0	Vert	PK	0.0	58.2	74.0	-15.8

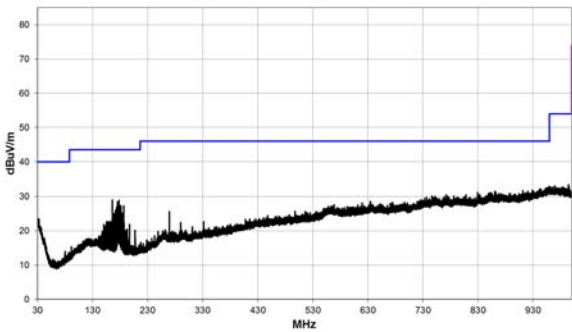


30 MHz – 1000 MHz

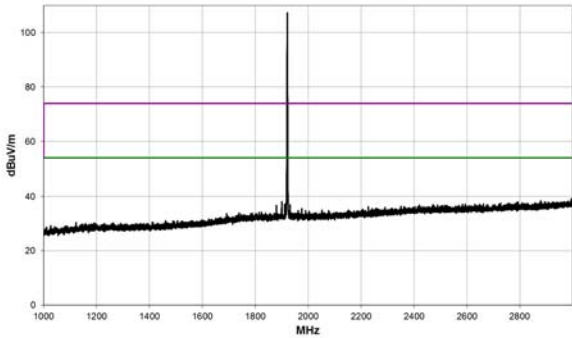


1 GHz – 3 GHz

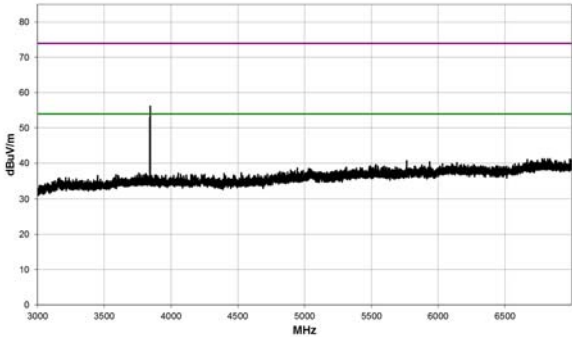

3 GHz – 7 GHz

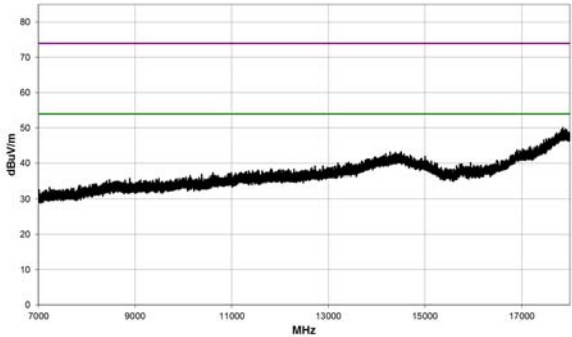


7 GHz – 18 GHz

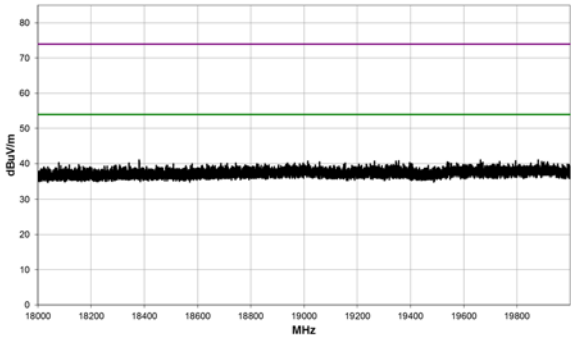


18 GHz – 20 GHz


Antenna 0												
RF carrier set to the highest carrier defined by the EUT												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
165.885	43.1	-11.8	1.0	75.0	3.0	0.0	Vert	QP	0.0	31.3	43.5	-12.2
175.078	40.5	-12.3	1.0	272.0	3.0	0.0	Vert	QP	0.0	28.2	43.5	-15.3
177.138	39.8	-12.3	1.0	104.0	3.0	0.0	Vert	QP	0.0	27.5	43.5	-16.0
30.203	28.2	-4.3	1.5	142.0	3.0	0.0	Vert	QP	0.0	23.9	40.0	-16.1
30.220	28.0	-4.3	1.28	168.9	3.0	0.0	Horz	QP	0.0	23.7	40.0	-16.3
172.024	39.1	-12.2	1.0	240.0	3.0	0.0	Vert	QP	0.0	26.9	43.5	-16.6
3856.777	41.8	2.4	1.06	162.9	3.0	0.0	Horz	AV	0.0	44.2	54.0	-9.8
3856.160	60.8	2.4	1.06	162.9	3.0	0.0	Horz	PK	0.0	63.2	74.0	-10.8
3856.802	37.9	2.4	1.2	210.9	3.0	0.0	Vert	AV	0.0	40.3	54.0	-13.7
3856.477	55.7	2.4	1.2	210.9	3.0	0.0	Vert	PK	0.0	58.1	74.0	-15.9

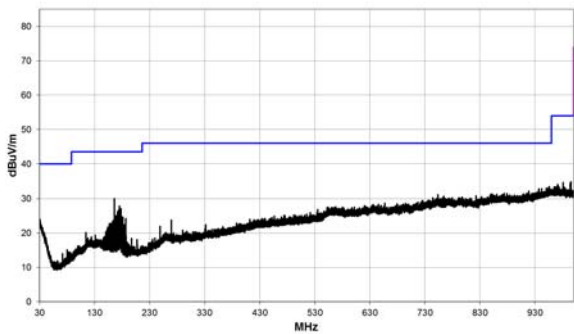


30 MHz – 1000 MHz

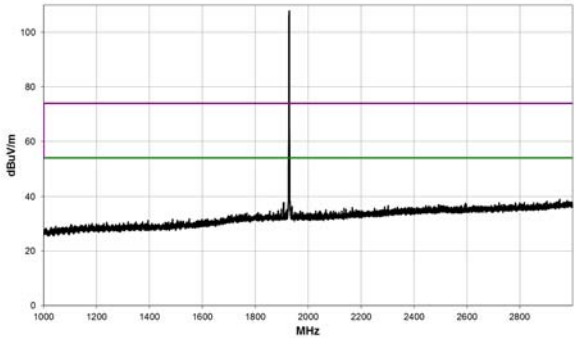


1 GHz – 3 GHz

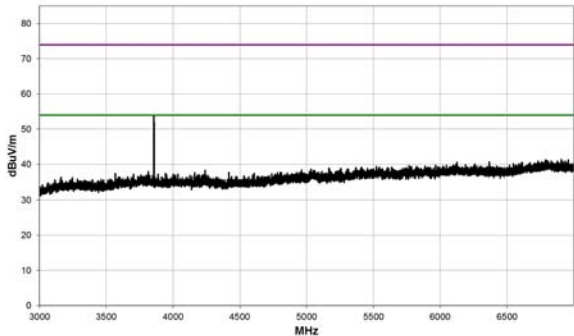

3 GHz – 7 GHz

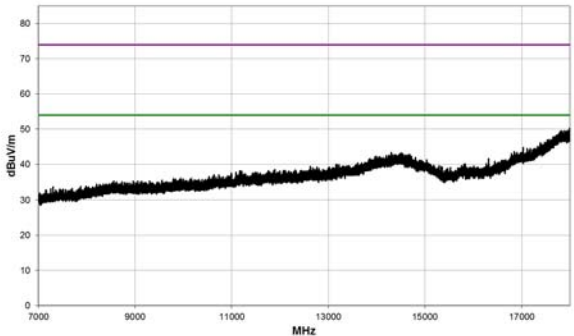


7 GHz – 18 GHz

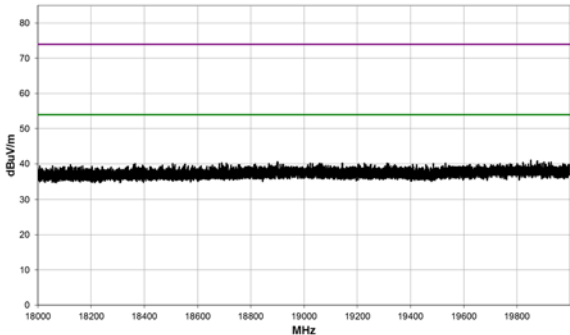


18 GHz – 20 GHz


Antenna 1												
RF carrier set to the lowest carrier defined by the EUT												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
165.866	42.4	-11.8	1.5	164.0	3.0	0.0	Horz	QP	0.0	30.6	43.5	-12.9
178.168	42.0	-12.3	1.27	335.1	3.0	0.0	Horz	QP	0.0	29.7	43.5	-13.8
175.123	41.1	-12.3	1.46	323.0	3.0	0.0	Horz	QP	0.0	28.8	43.5	-14.7
180.218	40.8	-12.4	1.5	149.0	3.0	0.0	Horz	QP	0.0	28.4	43.5	-15.1
32.134	29.9	-5.1	1.5	70.9	3.0	0.0	Horz	QP	0.0	24.8	40.0	-15.2
30.380	28.0	-4.4	1.0	334.9	3.0	0.0	Vert	QP	0.0	23.6	40.0	-16.4
180.209	36.1	-12.4	1.47	84.0	3.0	0.0	Vert	QP	0.0	23.7	43.5	-19.8
3843.053	40.6	1.8	1.0	172.9	3.0	0.0	Horz	AV	0.0	42.4	54.0	-11.6
3843.245	59.7	1.8	1.0	172.9	3.0	0.0	Horz	PK	0.0	61.5	74.0	-12.5
3843.012	38.9	1.8	1.25	214.9	3.0	0.0	Vert	AV	0.0	40.7	54.0	-13.3
3843.495	57.2	1.8	1.25	214.9	3.0	0.0	Vert	PK	0.0	59.0	74.0	-15.0

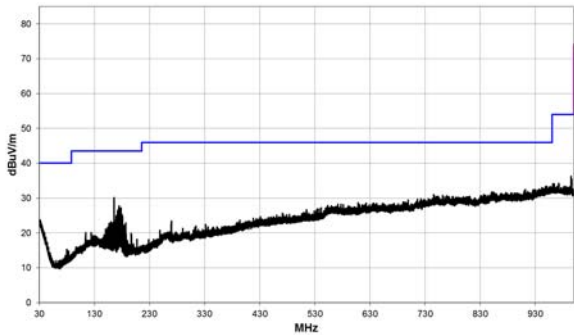


30 MHz – 1000 MHz

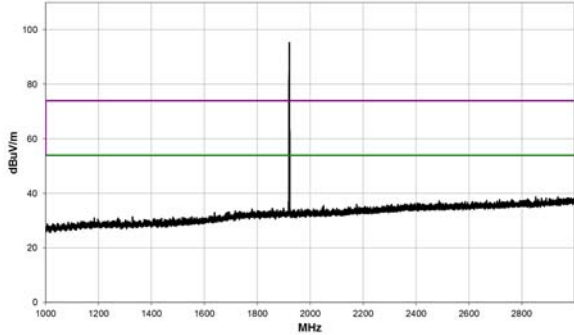


1 GHz – 3 GHz

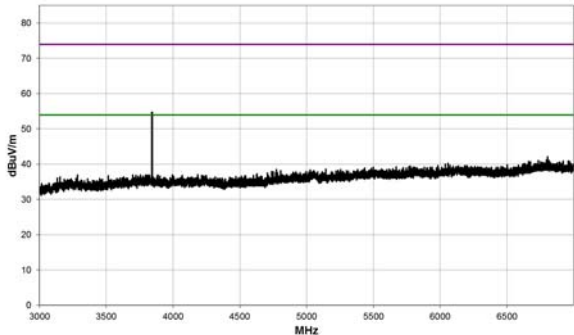

3 GHz – 7 GHz

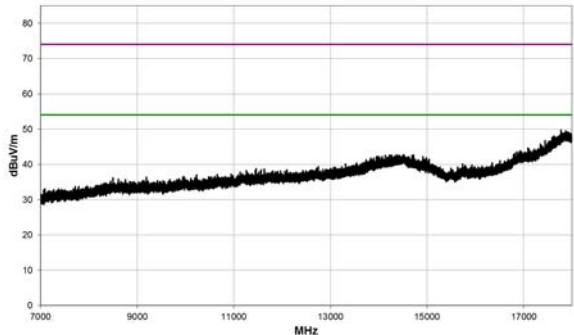


7 GHz – 18 GHz

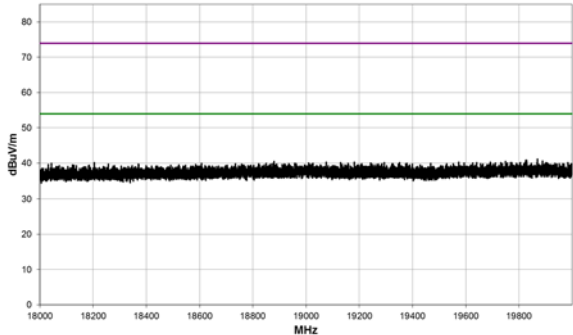


18 GHz – 20 GHz


Antenna 1												
RF carrier set to the Highest carrier defined by the EUT												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
165.866	42.4	-11.8	1.5	164.0	3.0	0.0	Horz	QP	0.0	30.6	43.5	-12.9
178.168	42.0	-12.3	1.27	335.1	3.0	0.0	Horz	QP	0.0	29.7	43.5	-13.8
175.123	41.1	-12.3	1.46	323.0	3.0	0.0	Horz	QP	0.0	28.8	43.5	-14.7
180.218	40.8	-12.4	1.5	149.0	3.0	0.0	Horz	QP	0.0	28.4	43.5	-15.1
32.134	29.9	-5.1	1.5	70.9	3.0	0.0	Horz	QP	0.0	24.8	40.0	-15.2
30.380	28.0	-4.4	1.0	334.9	3.0	0.0	Vert	QP	0.0	23.6	40.0	-16.4
180.209	36.1	-12.4	1.47	84.0	3.0	0.0	Vert	QP	0.0	23.7	43.5	-19.8
3856.685	41.3	2.4	1.06	160.9	3.0	0.0	Horz	AV	0.0	43.7	54.0	-10.3
3856.335	60.5	2.4	1.06	160.9	3.0	0.0	Horz	PK	0.0	62.9	74.0	-11.1
3856.693	37.8	2.4	1.5	111.0	3.0	0.0	Vert	AV	0.0	40.2	54.0	-13.8
3856.560	55.4	2.4	1.5	111.0	3.0	0.0	Vert	PK	0.0	57.8	74.0	-16.2

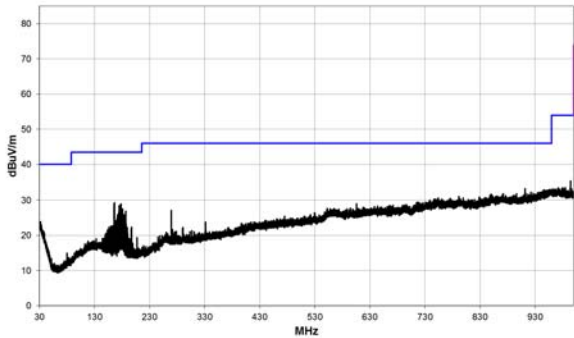


30 MHz – 1000 MHz

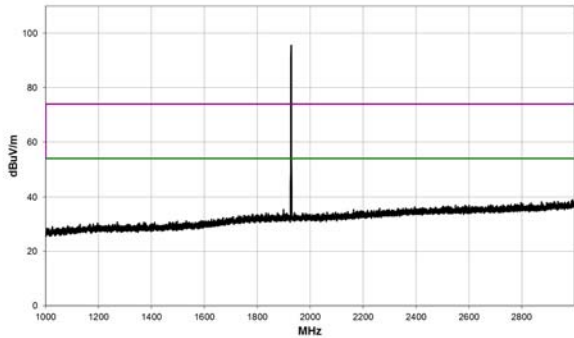


1 GHz – 3 GHz

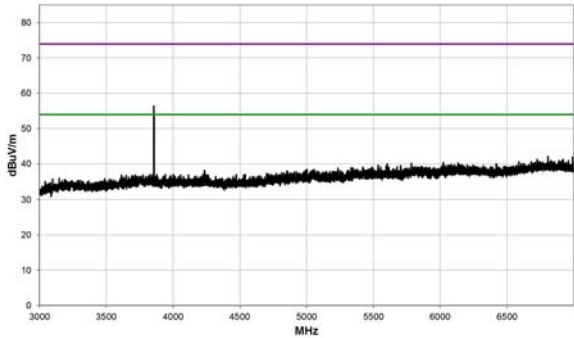

3 GHz – 7 GHz

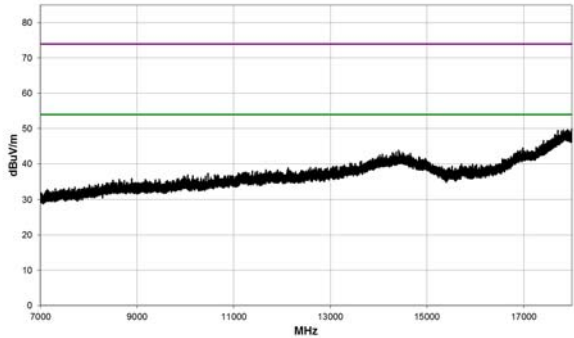

7 GHz – 18 GHz

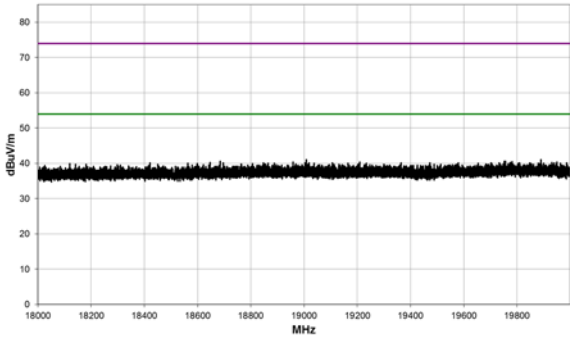

18 GHz – 20 GHz

31 Frame Repetition Stability

31.1 Definition

This is the mean value of the frame repetition rate recorded over 1000 samples.

31.2 Test Parameters

Test Standard and Clause:	ANSI C63.17 sub-clause 6.2.2
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1924.992 MHz
Deviations From Standard:	None

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

31.3 Test Limit

Each device that implements time division for the purpose of maintaining a duplex connection on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 50 parts per million (ppm).

Each device that further divides access in time in order to support multiple communication links on a given frequency carrier shall maintain a frame repetition rate with a frequency stability of at least 10 ppm.

31.4 Test Result

Frame Repetition Stability (ppm)	Limit (ppm)	Pass/Fail
0	±10ppm	PASS

32 Frame Period and Jitter

32.1 Definition

Jitter is the difference in time between the rising edges of consecutive pulses occurring due to time-related, abrupt, spurious variations in the duration of the frame interval

32.2 Test Parameters

Test Standard and Clause:	ANSI C63.17 sub-clause 6.2.3
Test Location:	Element Skelmersdale
Test Chamber:	Radio Lab
EUT Channels / Frequencies Measured:	1924.992 MHz
Deviations From Standard:	None

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

32.3 Test Limit

The jitter introduced at the 2 ends of a communication link shall not exceed 25 µs for any 2 consecutive transmissions.

32.4 Test Result

Maximum Jitter (µs)	3xSD Jitter (µs)	3xSD Jitter (µs)	Frame period (ms)	Limit (µs)		Pass/Fail
				Frame Period (ms)	Jitter (µs)	
0.01	-0.08	0.03	10.00003	20 or 10/X	25	Pass

33 Frequency Stability

33.1 Definition

The accuracy of the transmitted signal, This testing is carried out with the following conditions over 1000 samples.

33.2 Test Parameters

Test Standard and Clause:	ANSI C63.17 sub-clause 6.2.1
Test Location:	Element Skelmersdale
Test Chamber:	Radio Chamber
EUT Channels / Frequencies Measured:	1924.992 MHz

Environmental Conditions (Normal Environment)

Temperature: 22 °C	+15 °C to +35 °C (as declared)
Humidity: 32 % RH	20 % RH to 75 % RH (as declared)

33.3 Test Limit

The carrier frequency stability shall be maintained within ± 10 ppm ($\pm 0.001\%$).

33.4 Test Results

Temperature (°C)	Voltage (Vdc)	Fc (MHz)	offset (kHz)	offset (ppm)	Limit (ppm)
+20	Vnom	1924.992	2	1.04	± 10 ppm
-20	Vnom	1924.992	-1	0.52	± 10 ppm
+55	Vnom	1924.992	-1	0.52	± 10 ppm

Note: 1. The EUT is battery powered therefore voltage variations are not required.
2. Frequency variation relative to EUT operating Frequency.

35 Test Equipment

<i>Equipment Description</i>	<i>Manufacturer</i>	<i>Equipment Type</i>	<i>Element No</i>	<i>Last Cal Calibration</i>	<i>Calibration Period</i>	<i>Due For Calibration</i>
Spectrum Analyser	R&S	FSU46	REF910	2019-10-17	12	2020-10-17
Vector Signal Generator	HP	ESG-D E4433B	REF2195	2019-04-30	12	2020-04-30
Digital Signal Generator	Agilent	ESG D3000A	RFG441			
Temperature Indicator	Fluke	52 Series II	L426	2019-06-28	12	2020-06-28
Temperature Chamber	Votsch	VT 4002	U521	Use L426		
Radiocommunication Tester	R&S	CMD 60	RFG433	2019-07-30	12	2020-07-30
1-18GHz Horn	EMCO	3115	L139	2019-07-16	24	2021-07-16
Pre Amp	Agilent	8449B	L572	2019-10-15	12	2020-10-15
Bilog	Chase	CBL611/A	U573	2019-09-19	24	2021-09-19
Horn 18-26GHz (&U330)*	Flann	20240-20	L300	2018-04-24	24	2020-04-24
Radio Chamber - PP	Rainford EMC	ATS	REF940	2019-12-09	24	2021-12-09
Spectrum Analyser	R&S	FSU26	U405	2019-10-21	12	2020-10-21
Multimeter	Agilent	34405a	REF976	2019-11-21	12	2020-11-21
Power Supply	ISO-Tech	IPS-303DD	U515	Use REF976		

* Equipment was in calibration when used during the test schedule

36 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Frequency Counter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98**