



Product Integrity Laboratory

5151-47th Street, NE
Calgary, Alberta T3J 3R2
Tel: (403) 568-6605
Fax : (403) 568-6970

Certification Test Report
CFR 47 FCC Part 22
Industry Canada RSS 131
Emissions and Frequency Stability only
for
Telcosat

FCC ID # UBLSIU3A
IC ID#: 6548A-SIU3A

Project Code CG-316
(Report CG-316-RA-1-0)

Revision: 1

June 16, 2006

Prepared for: Telcosat

Author: Glen Moore
EMC Manager

Approved by: Nick Kobrosly
Lab Manager

Confidentiality Statement: This report and the information contained herein represent the results of testing articles/products identified and selected by the client. The tests were performed to specifications and/or procedures approved by the client. National Technical Systems ("NTS") makes no representations expressed or implied that such testing fully demonstrates efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article or similar products for a particular purpose. This document shall not be reproduced except in full without written approval from National Technical Systems ("NTS") and the customer.

Report Summary

NTS Canada

Product Integrity Laboratory
5151-47th Street, N.E. Calgary Alberta T3J 3R2

Accreditation Numbers: FCC 101386
IC 46405-3978 File # IC3978-2
Standards Council of Canada Accredited Laboratory No. 440

Applicant: Telcosat Inc
116, 1919 – 27th Avenue NE
Calgary, AB T2E 7A4
Tel: 403-291-4031
Email: carl.bosnyak@telcosat.com

Customer Representative: Carl Bosnyak

EUT Description:

EUT Description	Manufacturer	Model	Revision	Serial Number
Cellular Repeater	Telcosat Inc	RPT900	N/A	2060202

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Test Summary

Appendix	Test/Requirement Description	Deviations* from:			Pass / Fail	Applicable Rule Parts
		Base Standard	Test Basis	NTS Procedure		
A	Radiated Spurious Emissions	No	No	No	PASS	2.1046/90.210e)
B	Powerline AC conducted emissions	No	No	No	PASS	2.1049/90.210e)
C	Frequency Stability	No	No	No	PASS	RSS Gen section 4.3

Test Result: The product presented for testing complied with test requirements as shown above.

Prepared By: _____
Glen Moore
EMC Manager

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Table of Contents

REPORT SUMMARY	2
TEST SUMMARY	3
REGISTER OF REVISIONS	5
1.0 INTRODUCTION	6
1.1 PURPOSE	6
2.0 TEST EUT DESCRIPTION	6
2.1 CONFIGURATION	6
2.1.1 EUT POWER	7
2.2 SUPPORT CABLES	7
2.3 METHOD OF OPERATION DURING TESTS	7
3.0 EUT TEST CONFIGURATION	8
3.1 CONFIGURATION	8
APPENDICES	9
APPENDIX A: RADIATED E-FIELD EMISSIONS – 30 MHZ – 10 GHZ	10
APPENDIX B: CONDUCTED VOLTAGE EMISSIONS – 150 KHZ – 30 MHZ	17
APPENDIX C: FREQUENCY STABILITY	22
APPENDIX D: TEST EQUIPMENT LIST	25
END OF DOCUMENT	28

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

REGISTER OF REVISIONS

Revision	Date	Description of Revisions
1	June 21, 2006	Release

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

1.0 INTRODUCTION

1.1 PURPOSE

The purpose of this document is to describe the tests applied by NTS Canada to demonstrate compliance of the RPT900 to FCC Part 22 and the equivalent sections of Industry Canada's RSS 131

2.0 TEST EUT DESCRIPTION

2.1 CONFIGURATION

Description of EUT

	Name	Model	Revision	Serial Number
EUT	RPT900	RPT900		NA
Classification	Cellular Repeater (Base Station)			
Frequency Range	Uplink 869/894 MHz Downlink 824/894 MHz			
Transmitter duty cycle	100%			
Operating temperature	-30 c to 50 c			
Output power	30.0 dBm – based on two tone			
Functional Description	Cellular repeater			

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

2.1.1 EUT POWER

Voltage	120 VAC or 14.5 VDC
Number of Feeds	1 (1 Hot, 1 Return)
Description	DSC class 2 transformer

2.2 SUPPORT CABLES

Quantity	Model/Type	Routing		Shielded / Unshielded	Description	Cable Length (m)
		From	To			
1	Power	Power Supply	EUT	Unsheilded	Permanent connection to power supply	1.0

2.3 METHOD OF OPERATION DURING TESTS


Unless otherwise noted in the test report the EUT was tested while in a continuous transmit mode. The EUT was tuned to a low, middle, and high channel to perform power, occupied bandwidth, and spurious/harmonic tests. For conducted emissions the device was tuned to its center frequency. While transmitting the EUT was setup to operate at the intended maximum power output available to the end user. For all test cases pre-scans were completed in all modes to determine worst case levels.

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

3.0 EUT TEST CONFIGURATION

3.1 CONFIGURATION

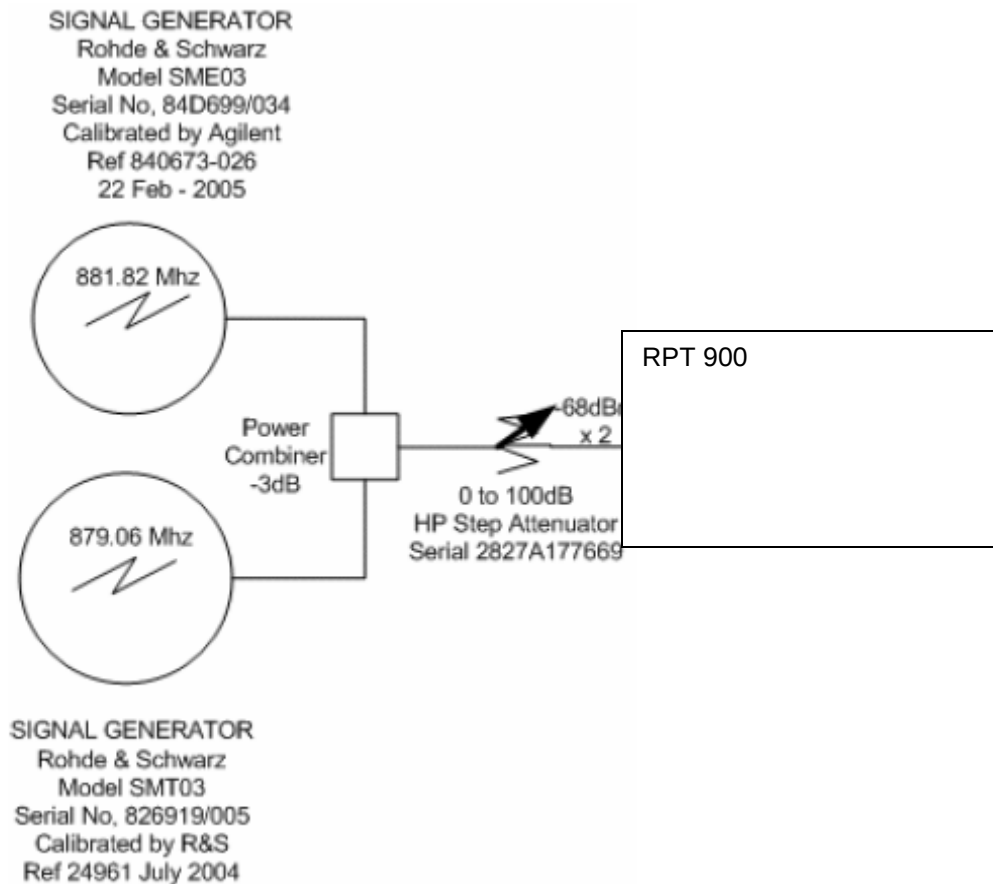

For all tests the repeater was configured as noted above

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

APPENDICES

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

APPENDIX A: RADIATED E-FIELD EMISSIONS – 30 MHZ – 10 GHZ**A.1. Base Standard & Test Basis**

Base Standard	CFR Title 47 – Telecommunications, Chapter I - FCC Part 22 – Public Mobile Services – Subpart H – Cellular Radiotelephone Service RSS-131, Issue 2: July 2003 :Spectrum Management and Telecommunications Policy Radio Standards Specification: Zone Enhancers for the Land Mobile Service
Test Basis	EIA/TIA 603
Test Method	NTS Radiated Emissions Test Method E006R4 NTS Radiated Emissions Signal Substitution Method 30MHz - 20GHz. EMC Test Method 11.0, Revision 01

A.2. Specifications

Frequency	47 CFR FCC Part 22, RSS-131	
	Theoretical Peak @ 3m ¹	ERP ²
MHz	dBμV/m	dBm
30 - 10000	84.3	-13

Note 1: Calculated using: $P_d - (43 + 10 \log(P_w))$

where P_d is the EUT power in dBm and P_w is the EUT power in watts

Note 2: Calculated using: $120 + 20 \log(\sqrt{49.2 \cdot P_w}) / 3$

where P_w is the EUT power in watts

A.3. Measurement Uncertainty

Frequency Range	Measurement Uncertainty (dB)	Expanded Uncertainty (K=2) (dB)
30 MHz – 1 GHz	+2.32/-2.36	+4.65/-4.72
1 GHz – 18 GHz	+3.48/-3.51	+6.96/-7.02

A.4. Deviations

Deviation Number	Time & Date	Description and Justification of Deviation	Deviation Reference			Approval
			Base Standard	Test Basis	NTS Procedure	
None						

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

A.5. Test Results

Compliance Scan Summary

 Product Integrity Laboratory V2.5	Project Number: CG-316		Tester: Glen Moore / Deniz Demirci											
	Model: Telcosat RPT900		Test ID: RE02c-10m-316 RE03-10m-316											
	Comments: Conf01: Uplink tones at 838 Mhz and 839.3 Mhz, Conf02: Downlink tones at 875 Mhz and 876.25 MHz Conf03: Downlink tones at 892.25 Mhz and 894 MHz Conf04: Uplink tones at 824Mhz and 825.25 MHz													
Standard: FCC Part 22		Measurement Distance:		<1GHz 10 meters >1GHz 3 meters										
Configuration / Antenna Polarization	Frequency (MHz)	Measured Level (dBµV)	Measurement Detector	Correction Factors (dB/m)	Emission Level (dBµV/m)	Signal Generator Level (dBm)	Tx Cable Loss (dB)	Tx Antenna Gain (dBi)	Dipole Gain (dBi)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Mast Height (cm)	Turntable Angle (degrees)
Conf01 / Horizontal	766.98	45.63	Q. Peak	-3.26	42.37	-44.50	11.00	5.40	2.15	-52.25	-13.0	39.3	102.5	66.2
Conf02 / Horizontal	766.98	47	Q. Peak	-3.26	43.74	-43.10	11.00	5.40	2.15	-50.85	-13.0	37.9	102	69
Conf03 / Horizontal	6947.43	32.32	Average	40.13	72.45	-32.10	2.67	14.41	2.15	-22.51	-13.0	9.5	115	3
Conf04 / Horizontal	6947.43	30.68	Average	40.13	70.81	-33.80	2.67	14.41	2.15	-24.21	-13.0	11.2	113	4
Conf01 / Vertical	67.61	49.72	Q. Peak	-20.24	29.48	-58.00	3.40	-1.90	2.15	-65.45	-13.0	52.5	204.3	269.5
Conf02 / Vertical	67.61	45.12	Q. Peak	-20.24	24.88	-62.60	3.40	-1.90	2.15	-70.05	-13.0	57.1	192	261
Positive Margin indicates a Pass														

The EUT s in compliance with the limits as specified above. Although a qp detector was used for measurements below 1 GHz, it was verified that the emission was a cw signal, therefore making detector selection irrelevant. Please also note that these signals were 39 dB or more below the limit

A.6. Observations

Note: For measurements from 1GHz - 10 GHz, no LNA was used; therefore measurement system noise floor seems higher

A.7. Sample Calculation

3m Limit = 10m Limit – 20 * log (3/10)

Emission Level = Measured Level + Correction Factors

Margin = Limit – Emission Level

ERP Limit (dBm) = Pd-(43 + 10 log(Pw)) ;where Pd is the EUT power in dBm and Pw is the EUT power in watts

Theoretical ERP Limit (dBuV/m) 120+20log(SQRT(49.2*Pw)/3) ;where Pw is the EUT power in watts

A.8. Test Data & Photographs

The test data collected during this test appear following this page.

A.9. Tested By



This testing was conducted in accordance with the ISO 17025:1999 scope of accreditation, table 1; Quality Manual.

Name: Glen Moore
Function: EMC Manager

Deniz Demirci
EMC Engineer


The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

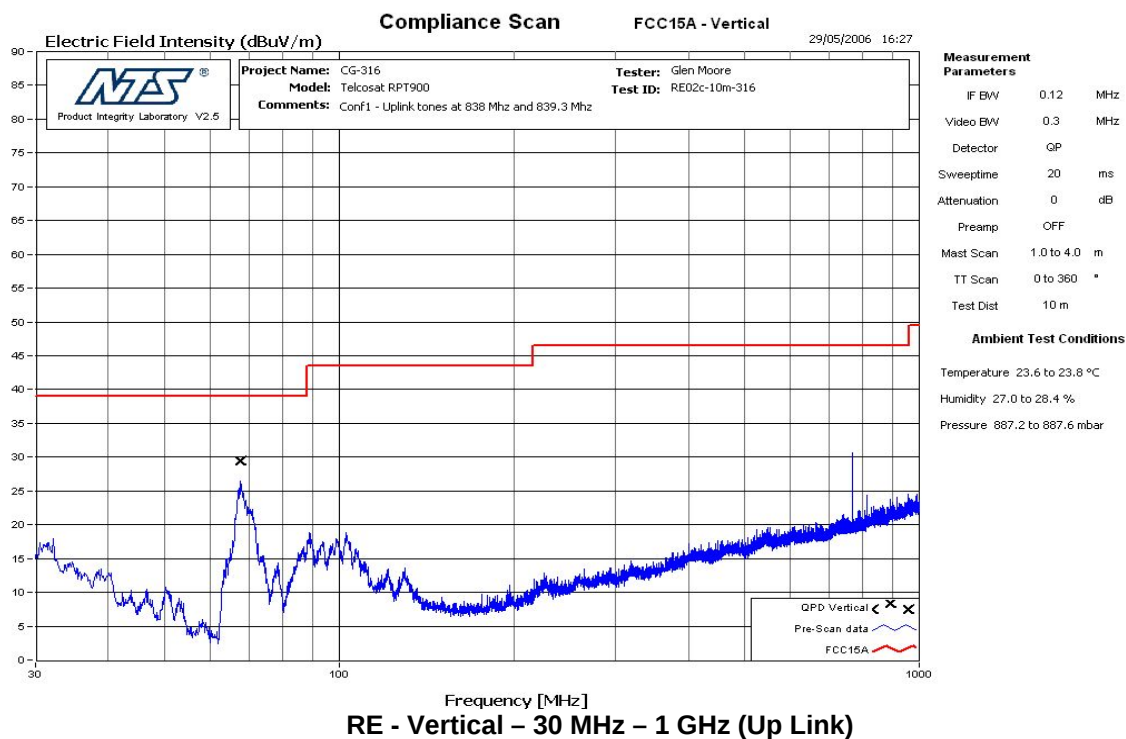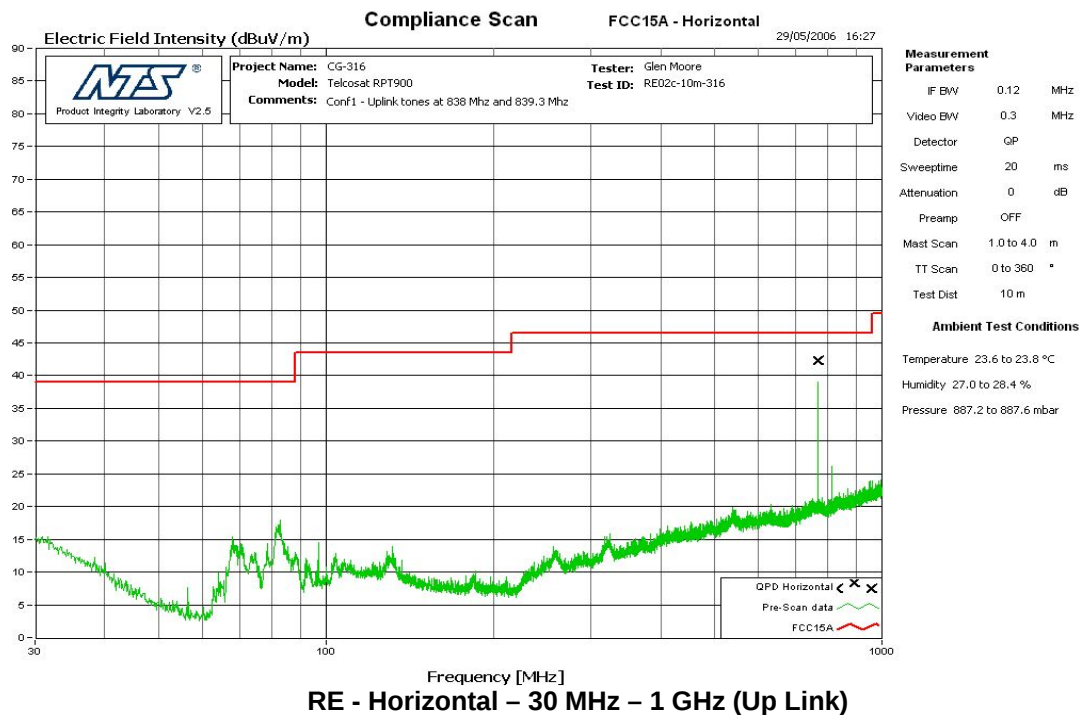


The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

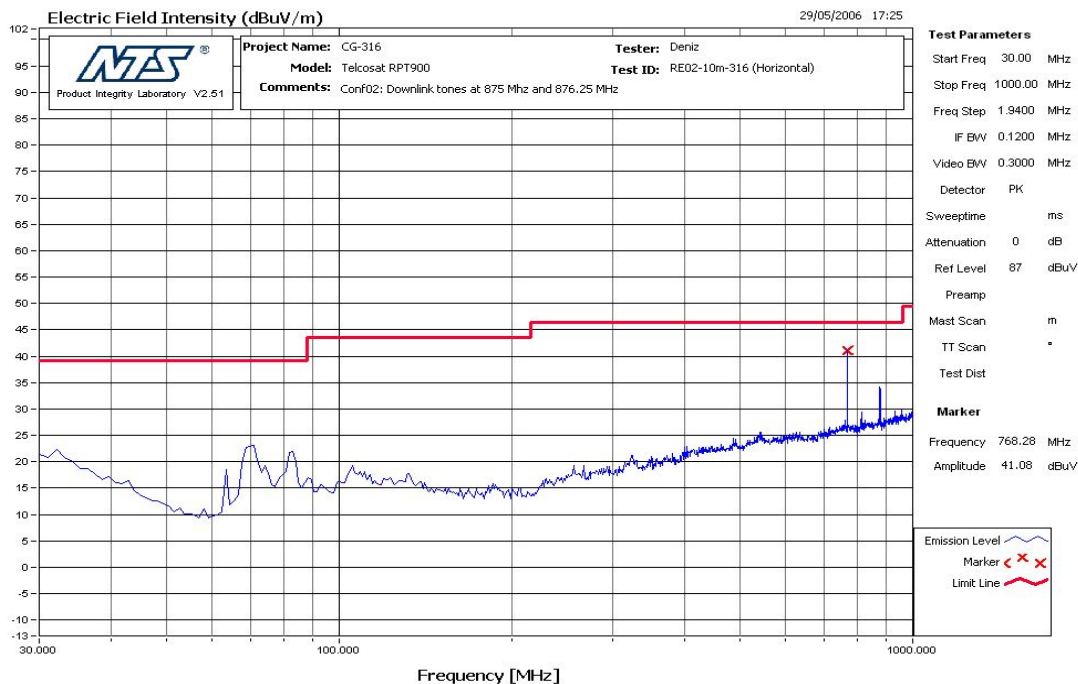


RE - Horizontal – 30 MHz – 1 GHz (Down Link)

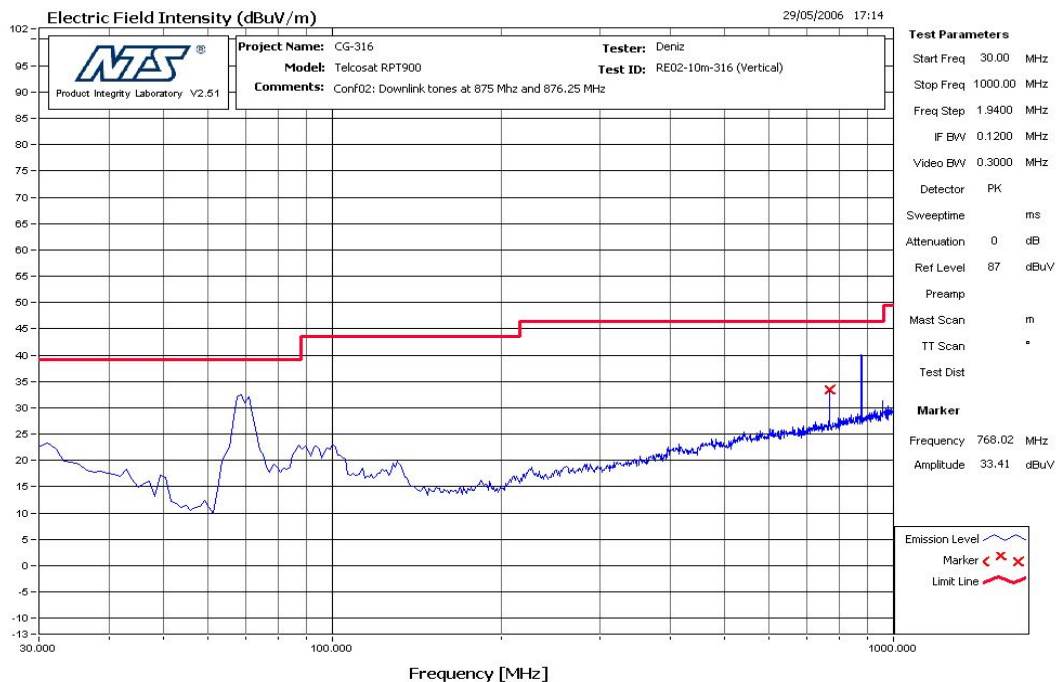


RE - Vertical – 30 MHz – 1 GHz (Down Link)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

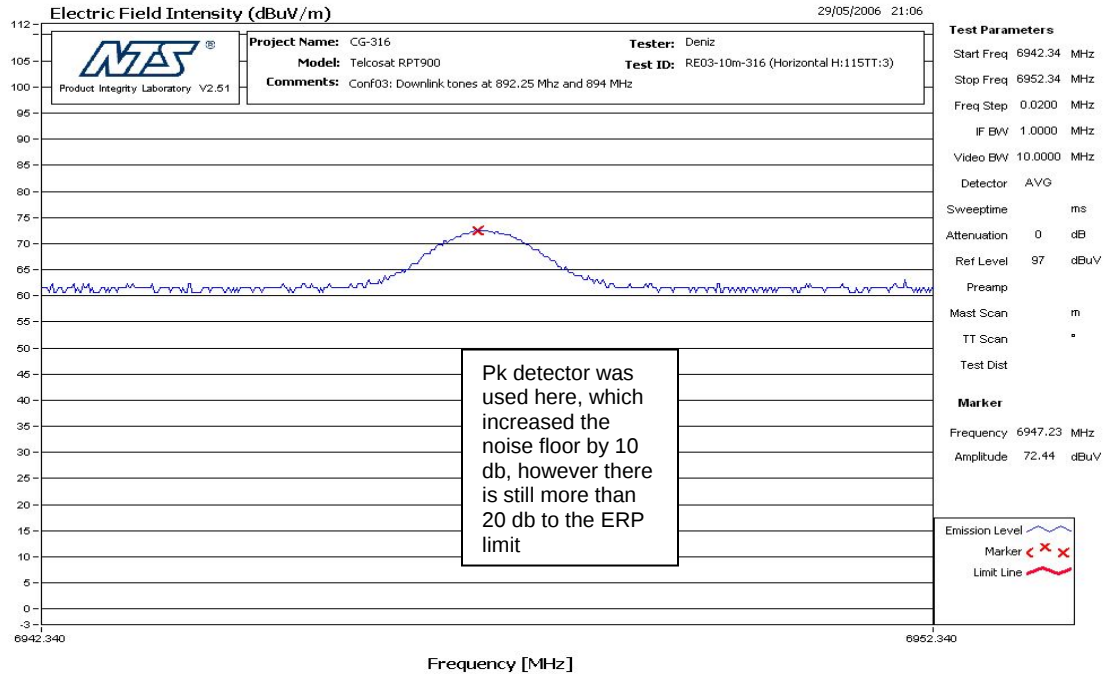


RE - Horizontal – 6947.23 MHz Compliance-scan

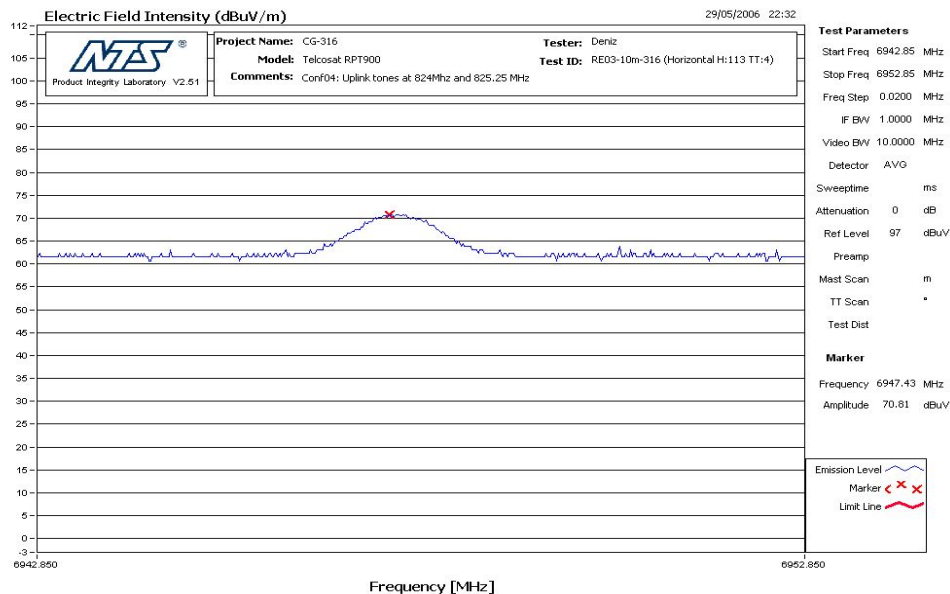

RE - Horizontal – 6947.43 MHz Compliance-scan

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.


NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

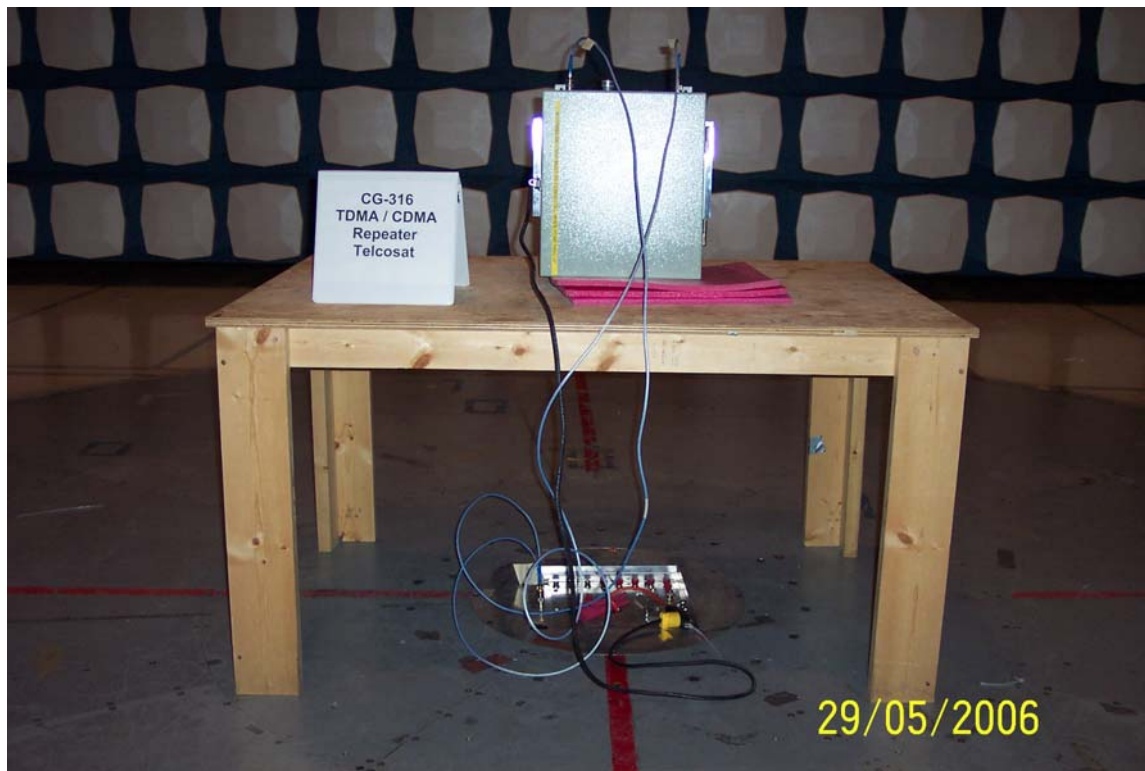

Photograph 1: EUT Set up for Radiated Emissions – Front View

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

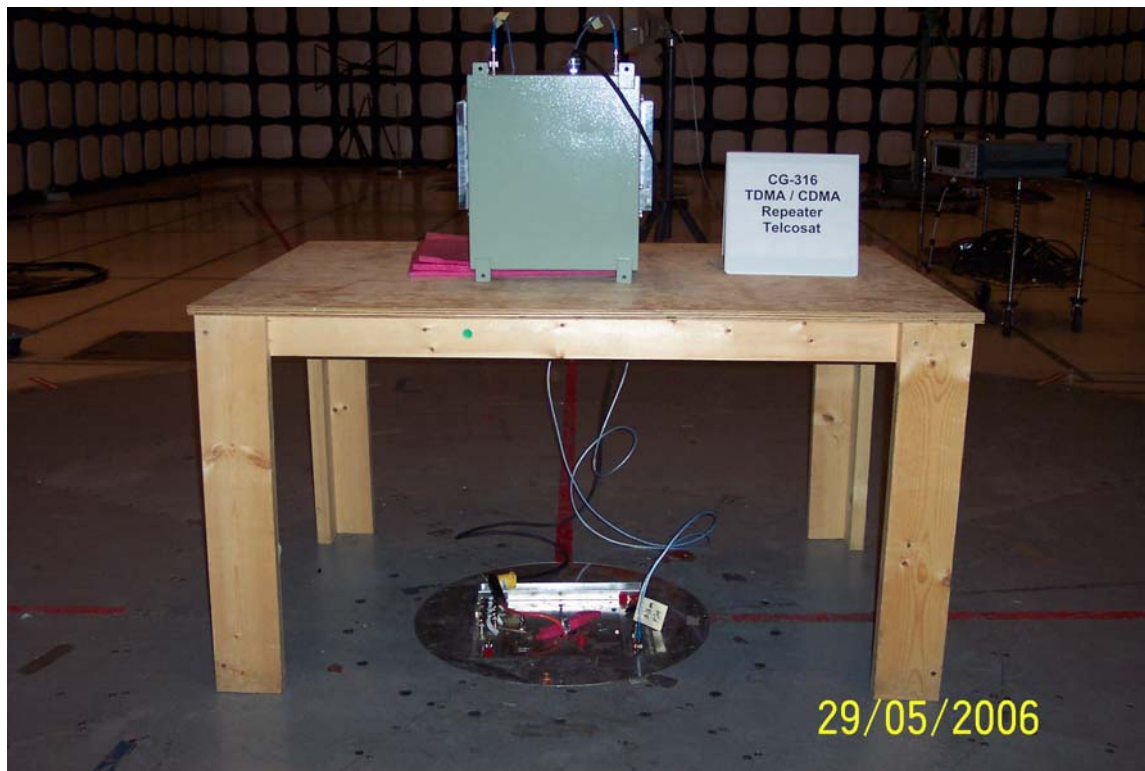

Photograph 2: EUT Set up for Radiated Emissions – Back View

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

APPENDIX B: CONDUCTED VOLTAGE EMISSIONS – 150 KHZ – 30 MHZ**B.1. Base Standard & Test Basis**

Base Standard	RSS-131, Issue 2: July 2003 :Spectrum Management and Telecommunications Policy Radio Standards Specification: Zone Enhancers for the Land Mobile Service RSS Gen, Issue 1 FCC Part 15 Subpart B
Test Basis	ANSI C63.4 2003
Test Method	NTS Conducted Emissions 150kHz – 30MHz Automated Test Method 6.0A R2

B.2. Specifications

Frequency MHz	Class B Limit	
	Quasi-Peak dBμV	Average dBμV
0.150 – 0.500	66 to 56 ¹	56 to 46 ¹
0.500 – 5.00	56	46
5.00 – 30.00	60	50

Note 1: decrease with the logarithm of the frequency

B.3. Measurement Uncertainty

Conducted Emissions	Measurement Uncertainty (dB)	Expanded Uncertainty (K=2) (dB)
150 kHz – 30 MHz	+1.21/-1.33	+2.41/-2.66

B.4. Deviations

Deviation Number	Time & Date	Description and Justification of Deviation	Deviation Reference			Approval
			Base Standard	Test Basis	NTS Procedure	
none						

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

B.5. Test Results



Product Integrity
Laboratory V2.5

Project Number: CG-316
Model: TDMA / CDMA Repeater, Telcosat RPT900
Comments: Conf18: Downlink tones at 875 Mhz and 876.25 MHz with CORCOM 3VQ3 filter

Tester: Deniz Demirci
Test ID: CE02c-10M-316

Standard: FCC15_B

Voltage/Line	Frequency (MHz)	Measurement Detector	Measured Value (dBμV)	Correction Factors (dB)	Emission Level (dBμV)	Limit Detector Type	Limit (dBμV)	Margin (dB)
AC 120V Line1A	0.1526	AV	34.42	11.77	46.19	AV	55.86	9.67
AC 120V Line1A	0.305	AV	23.88	10.85	34.73	AV	50.11	15.38
AC 120V Line1A	0.4514	AV	20.65	10.66	31.31	AV	46.85	15.54
AC 120V Line1A	0.6027	AV	19.33	10.6	29.93	AV	46.00	16.07
AC 120V Line1A	0.7528	AV	22.61	10.59	33.20	AV	46.00	12.80
AC 120V Line1A	2.5583	AV	13.82	10.77	24.59	AV	46.00	21.41
AC 120V NeutralA	0.1526	AV	34.57	11.76	46.33	AV	55.86	9.53
AC 120V NeutralA	0.3054	AV	24.41	10.84	35.25	AV	50.09	14.84
AC 120V NeutralA	0.4577	AV	22.33	10.64	32.97	AV	46.73	13.76
AC 120V NeutralA	0.6033	AV	19.56	10.59	30.15	AV	46.00	15.85
AC 120V NeutralA	0.7537	AV	22.25	10.57	32.82	AV	46.00	13.18
AC 120V NeutralA	2.4284	AV	19.18	10.74	29.92	AV	46.00	16.08
AC 120V Line1A	0.1524	QP	34.85	11.8	46.65	QP	65.87	19.22
AC 120V Line1A	0.4515	QP	24.41	10.66	35.07	QP	56.85	21.78
AC 120V Line1A	0.6048	QP	23.19	10.6	33.79	QP	56.00	22.21
AC 120V Line1A	0.7531	QP	27.87	10.59	38.46	QP	56.00	17.54
AC 120V Line1A	2.2887	QP	23.27	10.74	34.01	QP	56.00	21.99
AC 120V Line1A	2.4346	QP	25.63	10.75	36.38	QP	56.00	19.62
AC 120V NeutralA	0.1526	QP	34.93	11.76	46.69	QP	65.86	19.17
AC 120V NeutralA	0.4525	QP	24.79	10.65	35.44	QP	56.83	21.39
AC 120V NeutralA	0.6036	QP	24.08	10.59	34.67	QP	56.00	21.33
AC 120V NeutralA	0.7544	QP	28.07	10.57	38.64	QP	56.00	17.36
AC 120V NeutralA	2.2958	QP	25.35	10.73	36.08	QP	56.00	19.92
AC 120V NeutralA	2.4269	QP	26.75	10.74	37.49	QP	56.00	18.51

B.6. Modifications Required

A Corcom 3VQ3 AC powerline filter was added to the powerline inside the chassis to achieve compliance

B.7. Sample Calculation

Correction Factor = LISN Correction Factor + Cable Loss

Corrected Value = Measurement + Correction Factor

Margin = Limit – Corrected Emission Level

B.8. Test Data & Photographs

The test data and photographs collected during this test appear following this page.

B.9. Tested By

This testing was conducted in accordance with the ISO 17025:1999 scope of accreditation, table 1; Quality Manual.

Name: Deniz Demirci
Function: EMC Engineer

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970


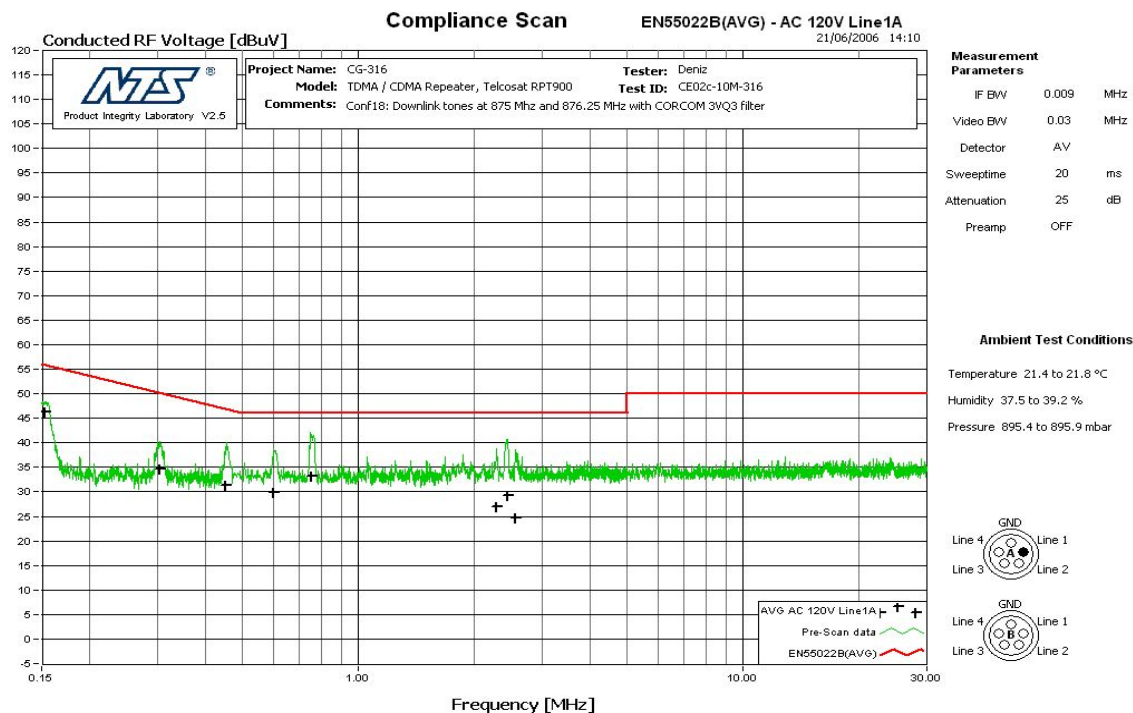


Figure 1: CE - Line 1 - 150 kHz - 30 MHz (Average Detector)

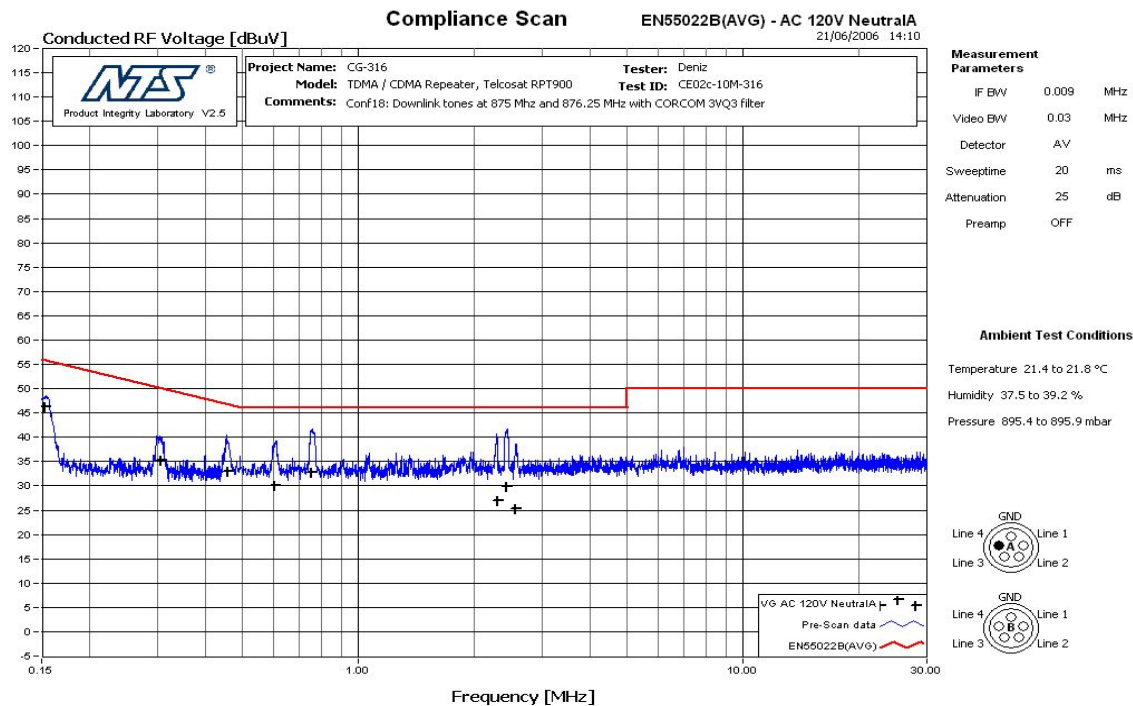

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

Figure 2: CE – Return 1 – 150 kHz – 30 MHz (Average Detector)

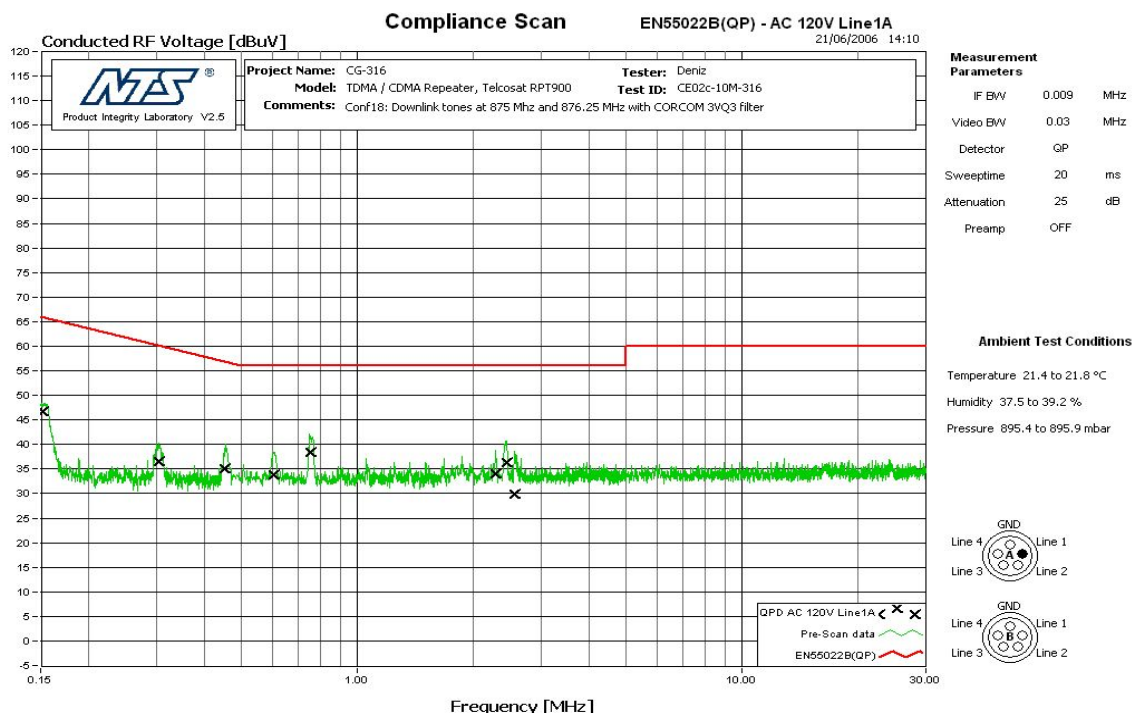


Figure 3: CE – Line 1 – 150 kHz – 30 MHz (Quasi-Peak Detector)


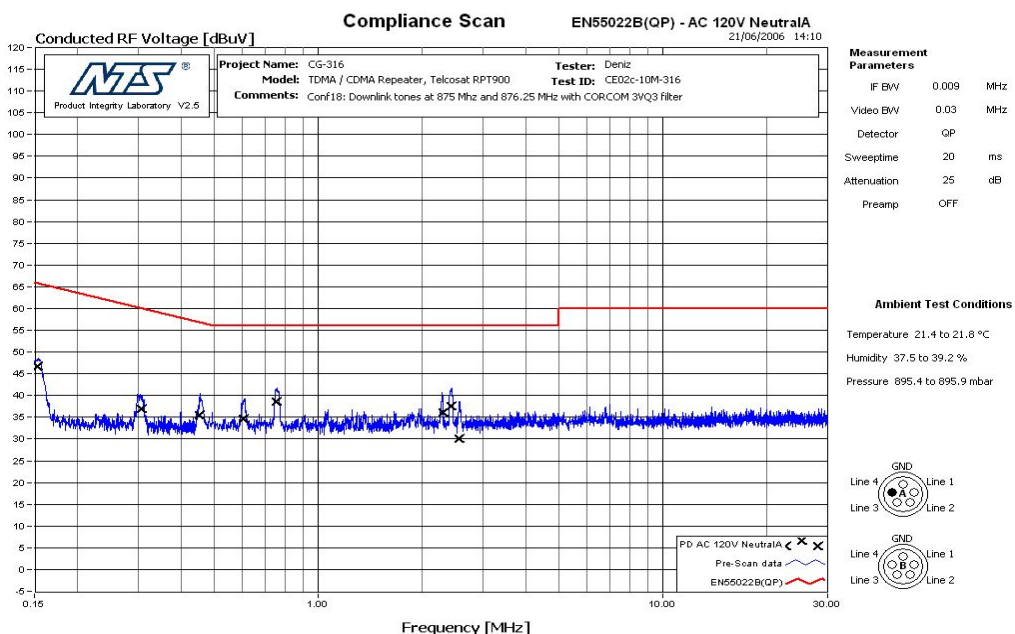


Figure 4: CE – Return 1 – 150 kHz – 30 MHz (Quasi-Peak Detector)

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

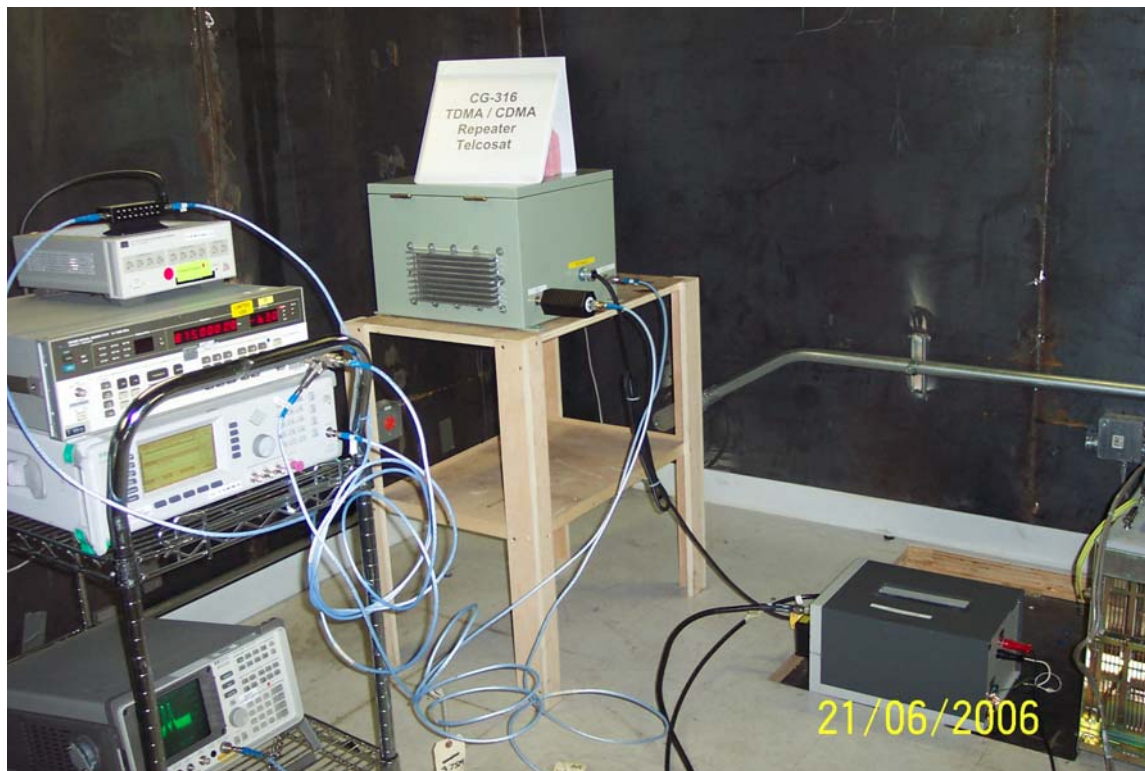

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

APPENDIX C: FREQUENCY STABILITY

C.1. Base Standard & Test Basis

Base Standard	FCC Part 22, RSS 131
Test Basis/Method	RSS 131, FCC Part 22, EIA/TIA 603

C.2. Limits

The frequency stability shall not exceed 1ppm (1KHz)

C.3. Measurement Uncertainty

Expanded Uncertainty (K=2)
+1.11/-1.22

C.4. Test Results

The EUT complies. See data below

Frequency Stability - Uplink

Number of Test	Temperature deg.C	Measured Frequency (Hz)	Drift (Hz)	Pass/Fail	Comments
1	-30	839250002	-2	Pass	
2	-30	839250002	-2	Pass	
3	-30	839250002	-2	Pass	
1	-20	839250002	-2	Pass	
2	-20	839250002	-2	Pass	
3	-20	839250002	-2	Pass	
1	-10	839250002	-2	Pass	
2	-10	839250002	-2	Pass	
3	-10	839250002	-2	Pass	
1	0	839250002	-2	Pass	
2	0	839250002	-2	Pass	
3	0	839250002	-2	Pass	
1	10	839250002	-2	Pass	
2	10	839250002	-2	Pass	
3	10	839250002	-2	Pass	
1	20	839250002	-2	Pass	
2	20	839250002	-2	Pass	
3	20	839250002	-2	Pass	
4	20	839250002	-2	Pass	Input: 101.5 Vac

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

5	20	839250002	-2	Pass	Input: 137.4 Vac
1	30	839250002	-2	Pass	
2	30	839250002	-2	Pass	
3	30	839250002	-2	Pass	
1	40	839250002	-2	Pass	
2	40	839250002	-2	Pass	
3	40	839250002	-2	Pass	
1	50	839250002	-2	Pass	
2	50	839250002	-2	Pass	
3	50	839250002	-2	Pass	


Frequency Stability - Downlink

Number of test	Temperature deg.C	Measured Frequency (Hz)	Drift (Hz)	Pass/Fail	Comments
1	-30	875000006	-6	Pass	
2	-30	875000010	-10	Pass	
3	-30	875000010	-10	Pass	
1	-20	875000006	-6	Pass	
2	-20	875000006	-6	Pass	
3	-20	875000006	-6	Pass	
1	-10	875000006	-6	Pass	
2	-10	875000006	-6	Pass	
3	-10	875000006	-6	Pass	
1	0	875000006	-6	Pass	
2	0	875000006	-6	Pass	
3	0	875000006	-6	Pass	
1	10	875000006	-6	Pass	
2	10	875000006	-6	Pass	
3	10	875000006	-6	Pass	
1	20	875000010	-10	Pass	
2	20	875000010	-10	Pass	
3	20	875000010	-10	Pass	
4	20	875000010	-10	Pass	* Input: 102.2 Vac
5	20	875000010	-10	Pass	* Input: 137.9 Vac
1	30	875000006	-6	Pass	
2	30	875000006	-6	Pass	
3	30	875000006	-6	Pass	
1	40	874999998	2	Pass	
2	40	874999998	2	Pass	
3	40	874999998	2	Pass	
1	50	874999998	2	Pass	
2	50	874999998	2	Pass	
3	50	874999998	2	Pass	

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

C.5. Test Setup diagram

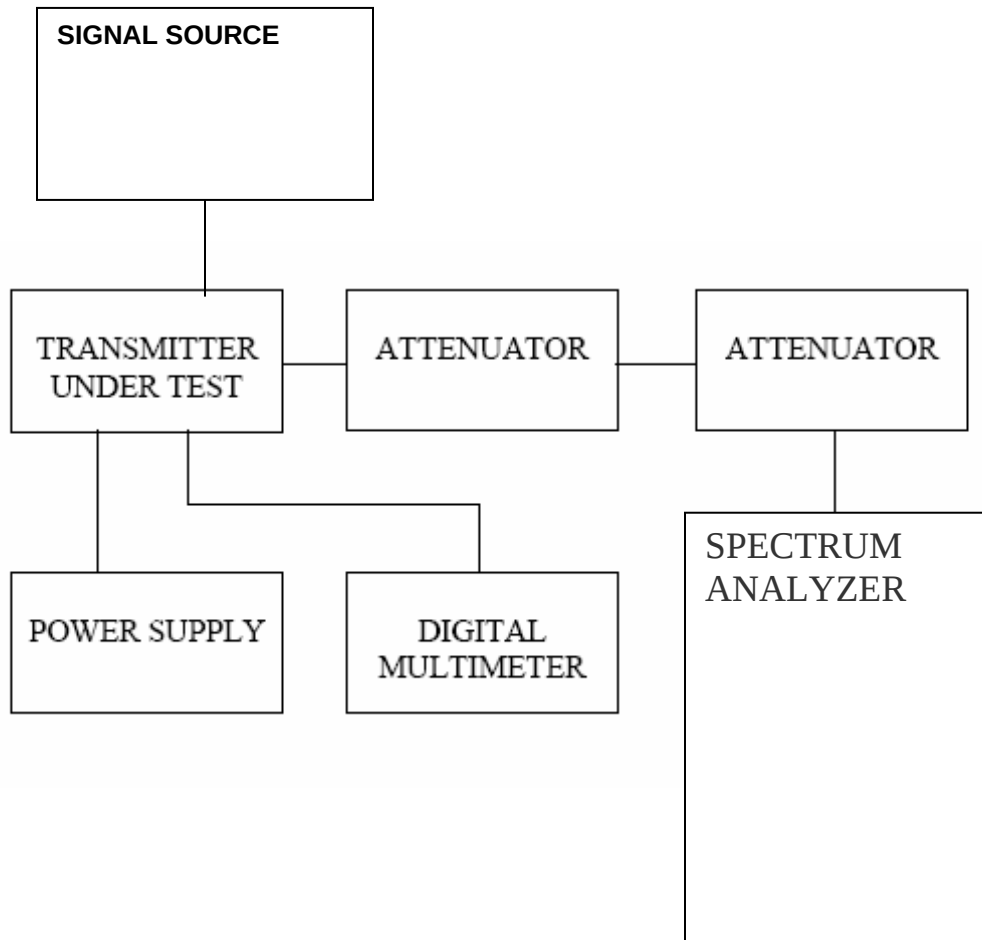

C.6. Tested By

This testing was conducted in accordance with the ISO 17025:1999 scope of accreditation, table 1; Quality Manual.

Name: John Yam
Function: Safety Engineer

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

APPENDIX D: TEST EQUIPMENT LIST**D.1. Conducted Emissions 150 kHz – 30 MHz Measurement Equipment**

Description		Manufacturer	Type/Model	Serial #	Cal Due	Cal Date
10m ANECHOIC CHAMBER						
A LISN Link					07JAN06	07JAN04
-LISN A Switch	☒ A	NA	NA	263177		
-Cable Switch to Limiter	☒ A	NA	NA	263164		
- Cable LISN to Switch	☒ A1	Succoflex	NA	263168	07JAN06	07JAN04
	☐ A2	Succoflex	NA	263169	07JAN06	07JAN04
	☐ A3	Succoflex	NA	263170	07JAN06	07JAN04
	☒ A4	Succoflex	NA	263171	07JAN06	07JAN04
- LISN	☐ A1	EMCO	38100/1SPEC	260454	07JAN06	07JAN04
- LISN	☐ A2	EMCO	38100/1SPEC	260268	07JAN06	07JAN04
- LISN	☐ A3	EMCO	38100/1SPEC	260458	07JAN06	07JAN04
- LISN	☐ A4	EMCO	38100/1SPEC	260265	07JAN06	07JAN04
- Table Top LISN	☒ TT	EMCO	3825	260354	08JAN06	08JAN04
CONTROL ROOM						
Test Receiver		Rohde & Schwarz	ESAI	260110 / 260111	02FEB06	02FEB05
Mast Controller		EMCO	2090	260166	N/A	N/A
Switch Matrix		TDL	SMC-002	260162	07JAN06	07JAN04
Cable Switch Matrix to Receiver		NA	NA	263166	07JAN06	07JAN04
A LISN Link					07JAN06	07JAN04
-LISN A Limiter	☒ A	NA	NA	263178		
-Cable Switch to Limiter	☒ A	NA	NA	263164		

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

D.2. Radiated Emissions 30 MHz – 1 GHz Measurement Equipment

Description	Manufacturer	Type/Model	Asset #	Cal Due	Cal Date
10m ANECHOIC CHAMBER					
Bilog Antenna	☐ Chase	CBL 6111B	260398	09JULY06	09JULY04
	☒ Chase	CBL 6112B	260301		
RF Cable	Suhner Succoflex	Ferrite bead loaded cable	260388	07JAN06	07JAN04
CONTROL ROOM					
Test Receiver	☒ Rohde & Schwarz	ESAI	260110 / 260111	2FEB06	2FEB05
Mast Controller	EMCO	2090	260165	N/A	N/A
Multi Device Controller TT1 (Turntable)	07JAN06	07JAN04		N/A	N/A
RF 10m East site Link				Suhner Succoflex	NA
- Cable 1	Suhner Succoflex	NA	263135		
- Cable 2	Suhner Succoflex	NA	263161		
- Cable 3	Suhner Succoflex	NA	263162		
- Cable 4	TDL	SMC-002	260162		
- Switch Matrix Controller	Hewlett Packard	8447F	260164		
- Amplifier					

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

D.3. Radiated Emissions 1 GHz – 25 GHz and Frequency Stability Measurement Equipment

Description	Manufacturer	Type/Model	Asset #	Cal Due	Cal Date
10m ANECHOIC CHAMBER					
Horn Antenna (Rx) 1 GHz – 18 GHz	EMCO	3115	260092	16Jun06	16JUN04
High pass filter	K&L	11SH10- 3860	263124	08JAN06	08JAN04
High frequency Link				07JAN06	07JAN04
Step Attenuator/Switch (0dB & 10 dB)	HP	11713A	260048 260097		
LNA	Miteq	JSD000121	260477		
Cable from LNA to SA	Succoflex	101PEA	263187		
Spectrum Analyzer 9k- 40GHz	Rohde & Schwarz	FSEK	260104	05APR06	05APR05
LNA DC Power Supply	Xantrex	LXO 30-2	260483	NA	NA
HPIB Extender	HP	37204	260096	N/A	N/A
CONTROL ROOM					
PC with FSEK Manual ctrl S/W	N/A	N/A	N/A	N/A	N/A
HPIB Extender	HP	37204	260168	N/A	N/A
Mast Controller	EMCO	2090	260166	N/A	N/A
Multi Device Controller TT1	EMCO	2090	260165	N/A	N/A
Horn Antenna (Tx)	EMCO	3160	260088	N/A	N/A

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970

END OF DOCUMENT

The test results contained in this report refer exclusively to the product(s) presented for testing. The test results do not cover models or products not referred herein. This test report should not be published or duplicated in whole or part without permission from the testing body and the customer.

NTS Product Integrity Laboratory, 5151-47th Street N.E. Tel: 403-568-6605, Fax: 403-568-6970