

FCC Radio Test Report

FCC ID : UDX-600218020
Equipment : Cisco Wireless 9174E Series Wi-Fi 7 Access Point
Brand Name : CISCO
Model Name : CW9174E
Applicant : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.407

The product was received on May 12, 2025, and testing was started from Jun. 11, 2025 and completed on Aug. 07, 2025. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	18
1.3 Testing Location Information	18
1.4 Measurement Uncertainty	18
2 TEST CONFIGURATION OF EUT.....	19
2.1 Test Channel Mode	19
2.2 The Worst Case Measurement Configuration	25
2.3 Accessories	26
2.4 Support Equipment.....	26
2.5 Test Setup Diagram	28
3 TRANSMITTER TEST RESULT	30
3.1 AC Power-line Conducted Emissions	30
3.2 Emission Bandwidth	32
3.3 Maximum Conducted Output Power	33
3.4 Peak Power Spectral Density.....	35
3.5 Unwanted Emissions.....	37
4 TEST EQUIPMENT AND CALIBRATION DATA	42
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX F. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX G. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	

History of this test report

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.4	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Daniel Hsu

Report Producer: Amber Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5725-5850	a, n (HT20), ac (VHT20), ax (HEW20), be(EHT20)	5745-5825	149-165 [5]
5725-5850	n (HT40), ac (VHT40), ax (HEW40), be(EHT40)	5755-5795	151-159 [2]
5725-5850	ac (VHT80), ax (HEW80), be(EHT80)	5775	155 [1]

Non-Beamforming_Radio 2_1T1S_Full RU

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11a	20	1TX
5.725-5.85GHz	802.11be EHT20	20	1TX
5.725-5.85GHz	802.11be EHT40	40	1TX
5.725-5.85GHz	802.11be EHT80	80	1TX

Non-Beamforming_Radio 2_2T1S_Full RU

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11a	20	2TX(Port 1/3)
5.725-5.85GHz	802.11be EHT20	20	2TX(Port 1/3)
5.725-5.85GHz	802.11be EHT40	40	2TX(Port 1/3)
5.725-5.85GHz	802.11be EHT80	80	2TX(Port 1/3)

Non-Beamforming_Radio 2_4T1S_Full RU

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11a	20	4TX
5.725-5.85GHz	802.11be EHT20	20	4TX
5.725-5.85GHz	802.11be EHT40	40	4TX
5.725-5.85GHz	802.11be EHT80	80	4TX

Non-Beamforming_Radio 2_1T1S_Multi-RU

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT80	80	1TX

Non-Beamforming_Radio 2_2T1S_Multi-RU

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT80	80	2TX(Port 1/3)

Non-Beamforming_Radio 2_4T1S_Multi-RU

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT80	80	4TX

Non-Beamforming_Radio 2_1T1S_Channel Puncturing

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT80	80	1TX

Non-Beamforming_Radio 2_2T1S_Channel Puncturing

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT80	80	2TX(Port 1/3)

Non-Beamforming_Radio 2_4T1S_Channel Puncturing

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT80	80	4TX

Beamforming_Radio 2

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11be EHT20-BF	20	4TX
5.725-5.85GHz	802.11be EHT40-BF	40	4TX
5.725-5.85GHz	802.11be EHT80-BF	80	4TX

**Scan Radio**

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5725-5850	a, n (HT20), ac (VHT20), ax (HEW20)	5745-5825	149-165 [5]

Non-Beamforming_Scan Radio

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11a	20	1TX
5.725-5.85GHz	802.11ax HEW20	20	1TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Evaluated EHT20/EHT40/EHT80 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/HEW20/HEW40/HEW80 mode are the same or lower than EHT20/EHT40/EHT80. (Radio 2)
- ♦ Evaluated HEW20 mode only due to the similar modulation. The power setting of HT20/ VHT20/ HEW20 mode are the same or lower than HEW20. (Scan Radio)

1.1.2 MRU (static preamble puncturing)

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)	5GHz Test CH						
		80	CH42	CH58	CH106	CH122	CH138	CH155	CH171
484+242	1		--	V	--	V	V	V	V
	2		V	V	V	V	V	V	V
	3		V	V	V	V	V	V	V
	4		V	--	V	V	--	V	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)	5GHz Test CH		
		160	CH50	CH114	CH163
996+484	1		--	V	--
	2		V	V	V
	3		V	V	V
	4		V	--	V
996+484+242	1		--	V	V
	2		V	V	V
	3		V	V	V
	4		V	V	V
	5		V	V	V
	6		V	V	V
	7		V	V	V
	8		V	--	V

1.1.3 Worst case of MRU (static preamble puncturing) evaluation procedure

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
5. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 3 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.

1.1.4 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Cisco	C-ANT9101=	Omnidirectional	Octal DART	2.4G+5G+6G+Scan+BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio3_6G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
2	Cisco	C-ANT9102=	Omnidirectional	Octal DART	2.4G+5G+6G+Scan+BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio3_6G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
3	Cisco	C-ANT9103=	Directional Patch	Right angle octal DART	2.4G+5G+6G+Scan+BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio3_6G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
4	Cisco	CW-ANT-T-O2-D8	Omnidirectional	Octal DART	2.4G+5G+6G+BLE&IEEE 802.15.5	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio3_6G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
5	Cisco	CW-ANT-T-D2-D8	Directional Panel	Right angle octal DART	2.4G+5G+6G+BLE&IEEE 802.15.6	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio3_6G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
6	Cisco	MA-ANT-3-C6	Panel Omni	RP-TNC	2.4G+5G+Scan+BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
7	Cisco	MA-ANT-3-D6	Downtilt Panel Omni	RP-TNC	2.4G+5G+Scan+BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*2R BLE&IEEE 802.15.4 1T*1R
8	Cisco	MA-ANT-3-E6	Wide Patch	RP-TNC	2.4G+5G+Scan+BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R



Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
9	Cisco	MA-ANT-3-F6	Narrow Patch	RP-TNC	2.4G+5G+Scan+ BLE&IEEE 802.15.4	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R BLE&IEEE 802.15.4 1T*1R
10	Cisco	AIR-ANT2524 V4C-R/RS=	Ceiling Mount Omni-Directional	RP-TNC	2.4G+5G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R
11	Cisco	AIR-ANT2544 V4M-R/RS	Wall-Mounted Omnidirectional	RP-TNC	2.4G+5G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R
12	Cisco	AIR-ANT2566 P4W-R/RS	4-Element Patch	RP-TNC	2.4G+5G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R
13	Cisco	AIR-ANT2566 D4M-R/RS	Directional Array	RP-TNC	2.4G+5G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R
14	Cisco	AIR-ANT2513 P4M-N	Patch Array	N-Female Bulkhead	2.4G+5G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R
15	Cisco	AIR-ANT2513 P4M-NS	Patch Array	N-Female Bulkhead	2.4G+5G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio4_Scan 1T*1R
16	Cisco	CW-ANT-T-O4 -R	Omnidirectional	Reverse Polarity TNC	2.4G+5G+6G	Radio1_2.4G 2*2 Radio3_2.4G 4*4 Radio2_5G 4*4 Radio3_6G 4*4

Ant.	Gain (dBi)									
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BLE& IEEE 802.15.4
1	2	6	6	6	6	6	6	6	6	3
2	4	4	4	4	4	4	4	4	4	4
3	6	6	6	6	6	6	6	6	6	6
4	3.25	5.63	5.63	5.63	5.63	5.63	5.63	5.63	5.63	3.25
5	6.6	5.7	5.7	5.7	5.7	5.7	5.7	5.7	5.7	6.6
6	4.9	4.9	4.9	4.9	4.9	-	-	-	-	4.9
7	2.9	3.7	3.7	3.7	3.7	-	-	-	-	2.9
8	7	6.3	6.3	6.3	6.3	-	-	-	-	7

Ant.	Gain (dBi)									
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BLE& IEEE 802.15.4
9	11.2	10.8	10.8	10.8	10.8	-	-	-	-	11.2
10	2	4	4	4	4	-	-	-	-	-
11	4	4	4	4	4	-	-	-	-	-
12	6	6	6	6	6	-	-	-	-	-
13	6	6	6	6	6	-	-	-	-	-
14	13	13	13	13	13	-	-	-	-	-
15	13	13	13	13	13	-	-	-	-	-
16	1	2	2	2	2	4	4	4	4	-

Note 1: The EUT has sixteen antennas.

Note 2: Ant. 1 and Ant. 14 (for 2.4G), Ant. 7 and Ant. 14 (for 5G), Ant.2 and Ant.3 (for 6G), Ant.7 and Ant.9 (for IoT), which designated by the manufacturer, was used during the test.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (1TX/2RX) (Radio 1)

Ant. 1~Ant.16 could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was port 1 and it was recorded in this test report.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) (Radio 1)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (1TX/4RX) (Radio 3)

Ant. 1~Ant.16 could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was port 2 and it was recorded in this test report.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/4RX) (Radio 3)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX) (Radio 3)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax mode(1TX/1RX) (Scan Radio)

Ant. 1~Ant.15 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (1TX/4RX) (Radio 2)

Ant. 1~Ant.16 could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was port 3 and it was recorded in this test report.

For IEEE 802.11 a/n/ac/ax/be mode (2TX/4RX) (Radio 2)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) (Radio 2)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax mode (1TX/1RX) (Scan Radio)

Ant. 1~Ant.15 could transmit/receive.

For 6GHz function:

For IEEE 802.11 ax/be mode (1TX/4RX) (Radio 3)

Ant. 1~Ant. 5 could transmit/receive.

Support diversity function and pre-tested on each single chain, the worst case was port 3 and it was recorded in this test report.

For IEEE 802.11 ax/be mode (2TX/4RX) (Radio 3)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 ax/be mode (4TX/4RX) (Radio 3)

Ant. 1~Ant.16 could transmit/receive simultaneously.

For IEEE 802.11 ax mode (1TX/1RX) (Scan Radio)

Ant. 1~Ant.15 could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 1~Ant. 9 could transmit/receive.

For 802.15.4 function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 1~Ant. 9 could transmit/receive.

Note 2: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{BT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{BT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{BT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

1.1.5 Table of Serial Number

Test item	Serial Number
RF	FVH2911ASZD

1.1.6 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter / PoE		
EUT Function	☐ Outdoor AP	☒ Indoor AP	
	☐ Fixed P2P AP	☐ Client	
Beamforming Function	☒ With beamforming	☐ Without beamforming	
Resource Unit	☒ Full RU	☐ Partial RU	
	☒ MRU(static preamble puncturing)	☐ MRU(dynamic preamble puncturing)	
Channel Puncturing	☒ Support	☐ Not support	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

1.1.7 Mode Test Duty Cycle

Non-Beamforming_Radio 2_Downtilt Panel Omni_1T1S_Full RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_1TX(Port3)	0.992	0.03	1.977m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	0.997	0.01	5.453m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_2T1S_Full RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	0.992	0.03	1.978m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_4T1S_Full RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_4TX	0.992	0.03	1.977m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_4TX	0.997	0.01	5.453m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_1T1S_Full RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_1TX(Port3)	0.992	0.03	1.977m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	0.997	0.01	5.453m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_2T1S_Full RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	0.992	0.03	1.978m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX(Port1&Port3)	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_4T1S_Full RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_4TX	0.992	0.03	1.977m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_4TX	0.997	0.01	5.453m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_1T1S_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	0.909	0.41	2.747m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_2T1S_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	0.894	0.49	2.745m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_4T1S_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	0.891	0.5	2.745m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_1T1S_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	0.909	0.41	2.747m	1k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_2T1S_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	0.923	0.35	2.745m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_4T1S_Multi-RU

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	0.82	0.86	1.693m	1k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_1T1S_Channel Puncturing

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX(Port3)	0.997	0.01	5.453m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Downtilt Panel Omni_2T1S_Channel Puncturing

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	0.997	0.01	5.456m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

**Non-Beamforming_Radio 2_Downtilt Panel Omni_4T1S_Channel Puncturing**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	0.997	0.01	5.456m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_1T1S_Channel Puncturing

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	0.997	0.01	5.456m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_2T1S_Channel Puncturing

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	0.997	0.01	5.456m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_Patch Array_4T1S_Channel Puncturing

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	0.997	0.01	5.456m	10

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Scan Radio_Downtilt Panel Omni

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_1TX	0.992	0.03	2.097m	10Hz (DC>=0.98)
802.11ax HEW20_Nss1,(MCS0)_1TX	0.997	0.01	5.446m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Scan Radio_Patch Array

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_1TX	0.992	0.03	2.097m	10Hz (DC>=0.98)
802.11ax HEW20_Nss1,(MCS0)_1TX	0.997	0.01	5.446m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming_Radio 2_Downtilt Panel Omni

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.997	0.01	5.453m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

**Beamforming_Radio 2_Patch Array**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.997	0.01	5.454m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Andy Wang	23.1~23.9°C / 56~62%	08/Jul/2025
Radiated (Co-location)	03CH02-HY	Vasari Huang	23.1~23.7°C / 53~59%	07/Aug/2025
☒ Wenhua 3rd.. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Johnny Yu	23.1~23.7°C / 54~63%	11/Jun/2025~18/Jul/2025
Radiated	03CH24-HY	Andy Wang	22.2~23.3°C / 50~51%	02/Jul/2025~05/Jul/2025

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.44 dB	Confidence levels of 95%
Conducted Output Power	1.48 dB	Confidence levels of 95%
Bandwidth	0.05 MHz	Confidence levels of 95%
Conducted Emission	1.48 dB	Confidence levels of 95%
Power Spectral Density	1.22 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	2.9 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.64 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	5.02 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	5.28 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099.1
------------------------------	--------------------------------------

Non-Beamforming_Radio 2_Downtilt Panel Omni_1T1S_Full RU

Mode	Power Setting
802.11a_Nss1,(6Mbps)_1TX(Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-
5755MHz	19
5795MHz	19
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-
5775MHz	19

Non-Beamforming_Radio 2_Downtilt Panel Omni_2T1S_Full RU

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-
5755MHz	19
5795MHz	19
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-
5775MHz	16.5

**Non-Beamforming_Radio 2_Downtilt Panel Omni_4T1S_Full RU**

Mode	Power Setting
802.11a_Nss1,(6Mbps)_4TX	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT20_Nss1,(MCS0)_4TX	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT40_Nss1,(MCS0)_4TX	-
5755MHz	19
5795MHz	19
802.11be EHT80_Nss1,(MCS0)_4TX	-
5775MHz	18

Non-Beamforming_Radio 2_Patch Array_1T1S_Full RU

Mode	Power Setting
802.11a_Nss1,(6Mbps)_1TX(Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-
5755MHz	19
5795MHz	19
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-
5775MHz	19

Non-Beamforming_Radio 2_Patch Array_2T1S_Full RU

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19



Mode	Power Setting
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-
5755MHz	18
5795MHz	19
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-
5775MHz	14.5

Non-Beamforming_Radio 2_Patch Array_4T1S_Full RU

Mode	Power Setting
802.11a_Nss1,(6Mbps)_4TX	-
5745MHz	17
5785MHz	17
5825MHz	17.5
802.11be EHT20_Nss1,(MCS0)_4TX	-
5745MHz	16.5
5785MHz	17
5825MHz	17
802.11be EHT40_Nss1,(MCS0)_4TX	-
5755MHz	14
5795MHz	15.5
802.11be EHT80_Nss1,(MCS0)_4TX	-
5775MHz	12.5

Non-Beamforming_Radio 2_Downtilt Panel Omni_1T1S_Multi-RU

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	-
5775MHz	17

Non-Beamforming_Radio 2_Downtilt Panel Omni_2T1S_Multi-RU

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	-
5775MHz	13

**Non-Beamforming_Radio 2_Downtilt Panel Omni_4T1S_Multi-RU**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
5775MHz	13.5

Non-Beamforming_Radio 2_Patch Array_1T1S_Multi-RU

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	-
5775MHz	16

Non-Beamforming_Radio 2_Patch Array_2T1S_Multi-RU

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	-
5775MHz	10

Non-Beamforming_Radio 2_Patch Array_4T1S_Multi-RU

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
5775MHz	8.5

Non-Beamforming_Radio 2_Downtilt Panel Omni_1T1S_Channel Puncturing

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX(Port3)	-
5775MHz	17.5

Non-Beamforming_Radio 2_Downtilt Panel Omni_2T1S_Channel Puncturing

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	-
5775MHz	14.5

Non-Beamforming_Radio 2_Downtilt Panel Omni_4T1S_Channel Puncturing

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
5775MHz	15

**Non-Beamforming_Radio 2_Patch Array_1T1S_Channel Puncturing**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX(Port3)	-
5775MHz	16

Non-Beamforming_Radio 2_Patch Array_2T1S_Channel Puncturing

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	-
5775MHz	12.5

Non-Beamforming_Radio 2_Patch Array_4T1S_Channel Puncturing

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
5775MHz	10

Non-Beamforming_Scan Radio_Downtilt Panel Omni

Mode	Power Setting
802.11a_Nss1,(6Mbps)_1TX	-
5745MHz	14
5785MHz	14
5825MHz	14
802.11ax HEW20_Nss1,(MCS0)_1TX	-
5745MHz	14
5785MHz	14
5825MHz	14

Non-Beamforming_Scan Radio_Patch Array

Mode	Power Setting
802.11a_Nss1,(6Mbps)_1TX	-
5745MHz	14
5785MHz	14
5825MHz	14
802.11ax HEW20_Nss1,(MCS0)_1TX	-
5745MHz	14
5785MHz	14
5825MHz	14

**Beamforming_Radio 2_Downtilt Panel Omni**

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5745MHz	19
5785MHz	19
5825MHz	19
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5755MHz	19
5795MHz	19
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5775MHz	18

Beamforming_Radio 2_Patch Array

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5745MHz	11
5785MHz	11
5825MHz	11
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5755MHz	11
5795MHz	11
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5775MHz	10.5

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	PoE Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
1	PoE Mode
Operating Mode > 1GHz	CTX
Orthogonal Planes of EUT	Z Plane
	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated measurement
Operating Mode	CTX
1	R1_2.4G(2*2)(ePA)+R2_5G(4*4)+R3_6G(4*4)+R4_Scan:2.4G+5G+6G(1T*2R)+BT
2	R2_5G(4*4)+R3_2.4G(4*4)(XOR)+R4_Scan:2.4G+5G+6G(1T*2R)+BT
3	R1_2.4G(2*2)(ePA)+R2_5G(4*4)+R3_6G(4*4)+R4_Scan:2.4G+5G+6G(1T*2R)+IEEE 802.15.4
4	R2_5G(4*4)+R3_2.4G(4*4)(XOR)+R4_Scan:2.4G+5G+6G(1T*2R)+IEEE 802.15.4
Refer to Sporton Test Report No.: FA550854 for Co-location RF Exposure Evaluation and Appendix F for Radiated Emission Co-location.	

2.3 Accessories

Accessories				
Low Profile Mounting Bracket	Brand Name	Cisco	Model Name	AIR-AP-BRACKET-1
Ceiling grid clip	Brand Name	Cisco	Model Name	AIR-AP-T-RAIL-R

Reminder: Regarding to more detail and other information, please refer to user manual.

2.4 Support Equipment


Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	8-Port Smart Antenna Connector to PR-TNC connectors 2ft Cable	CISCO	AIR-CAB002-D8-R	-	Provided by Customer
2	SMA Cable * 8	Amphenol RF Asia Ltd	95-668-45449-1	-	Provided by Customer
3	AC Power Cable	Power Sync	PW-GPC180-3	-	-
4	RJ45 Cable	Power sync	CAT-6E-03	-	-
5	PoE	PHIHONG	POE60U-BTA	-	Provided by Customer

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	PoE	PHIHONG	POE60U-BTA	-	Provided by Customer
4	AC Power Cable X2	Power Sync	PW-GPC180-3	-	-
5	SMA Cable	Amphenol RF Asia Ltd	95-668-45449-1	-	Provided by Customer
6	8-Port Smart Antenna Connector to PR-TNC connectors 2ft Cable	CISCO	AIR-CAB002-D8-R	-	Provided by Customer




Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	8-Port Smart Antenna Connector to PR-TNC connectors 2ft Cable	CISCO	AIR-CAB002-D8-R	-	Provided by Customer
2	SMA Cable * 8	Amphenol RF Asia Ltd	95-668-45449-1	-	Provided by Customer
3	RJ45 Cable	Power sync	CAT-6E-03	-	-
4	PoE (Remote)	PHIHONG	POE60U-BTA	-	Provided by Customer
5	AC Power Cable (Remote)	Power Sync	PW-GPC180-3	-	-

2.5 Test Setup Diagram

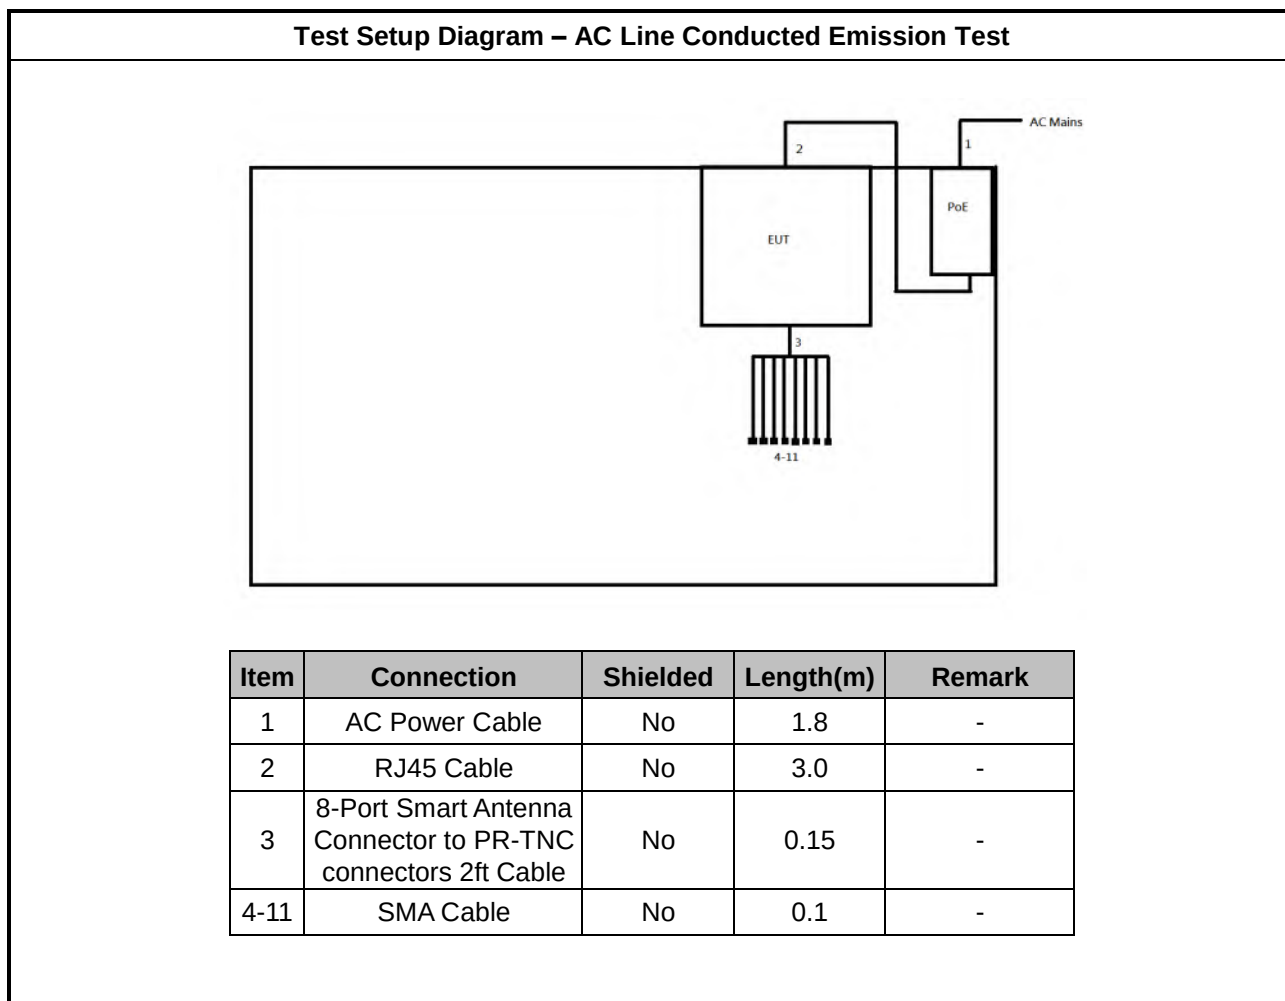

Test Setup Diagram - Radiated Test_PoE Mode

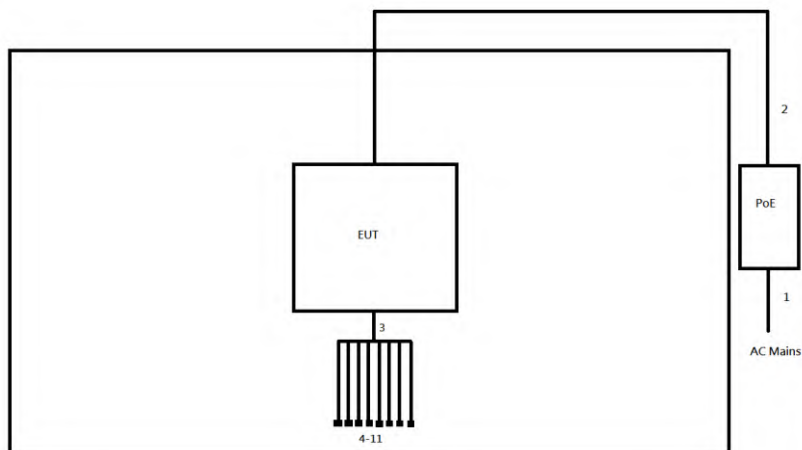

Item	Connection	Shielded	Length(m)	Remark
1	AC Power Cable	No	1.8	-
2	RJ45 Cable	No	3.0	-
3	8-Port Smart Antenna Connector to PR-TNC connectors 2ft Cable	No	0.15	-
4-11	SMA Cable	No	0.1	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

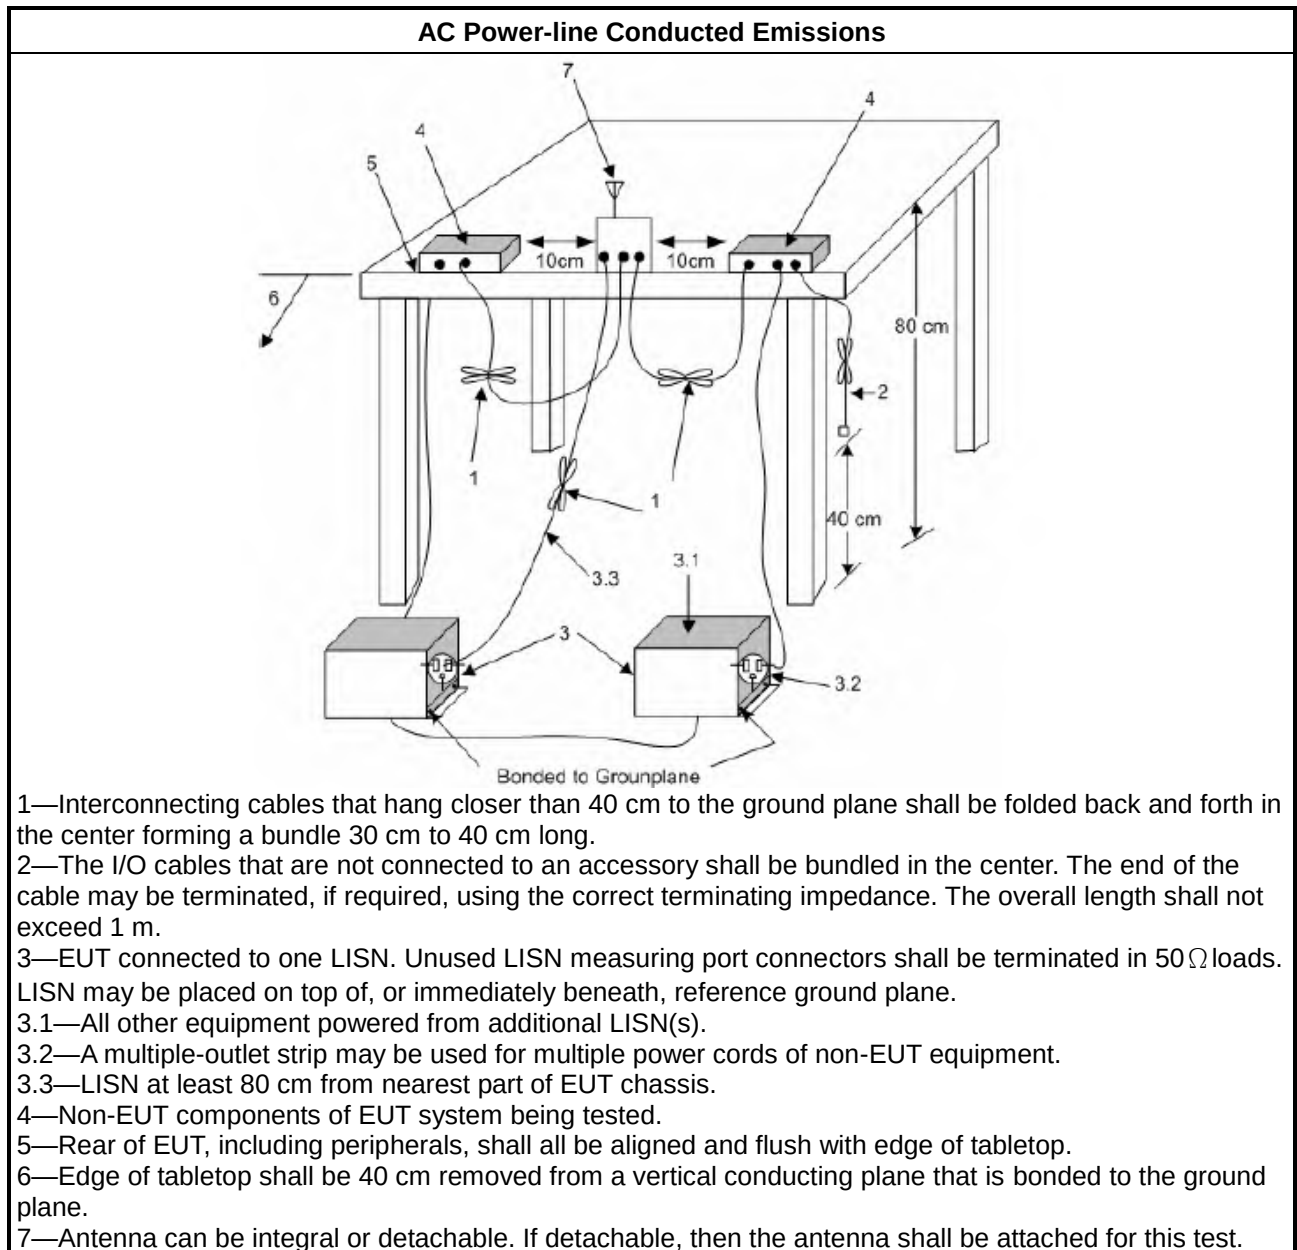

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☐	For the 5.15-5.25 GHz band, N/A
☐	For the 5.25-5.35 GHz band, N/A
☐	For the 5.47-5.725 GHz band, N/A
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

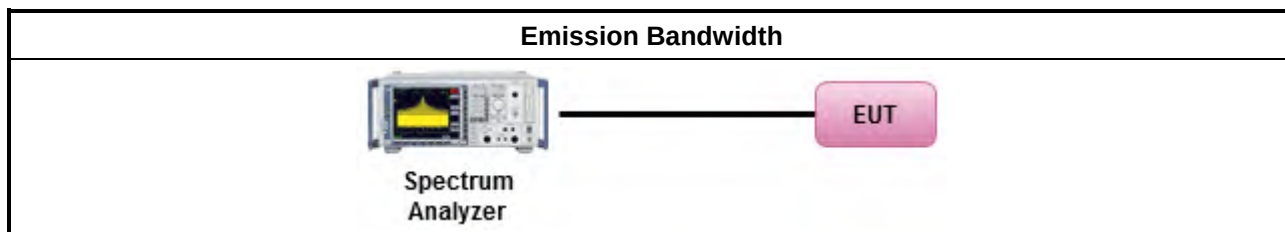

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☐ For the 5.15-5.25 GHz band:	
	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Conducted Output Power	
	Duty cycle $\geq 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

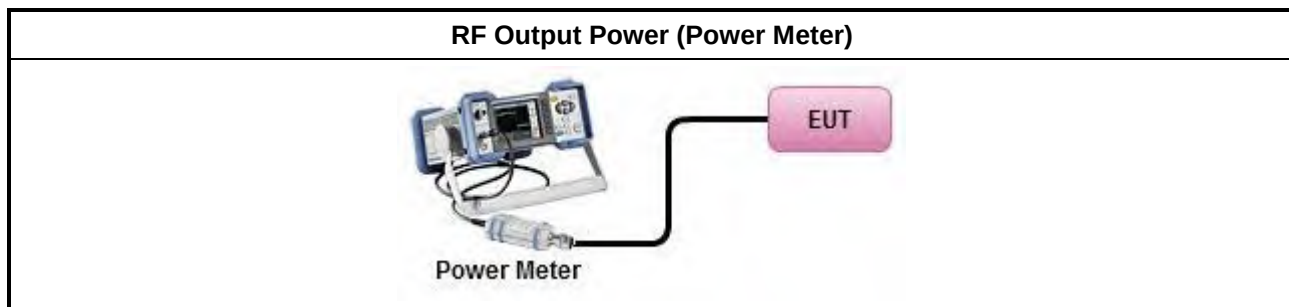

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☐ For the 5.15-5.25 GHz band:	
	Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
Duty cycle ≥ 98%	
☒	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
Duty cycle < 98%	
☒	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$

3.4.4 Test Setup

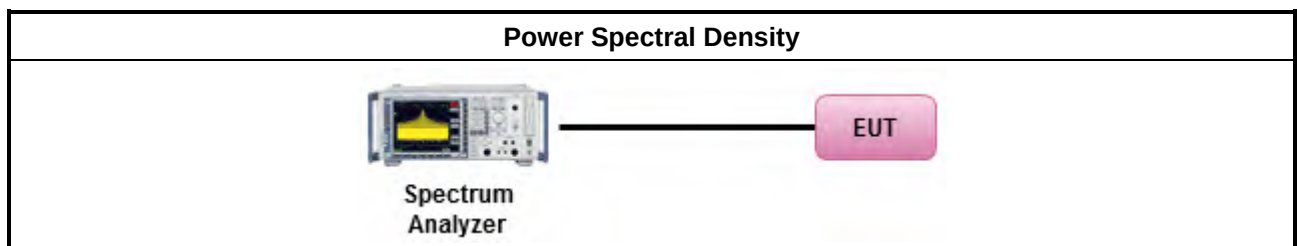

3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
☒	Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.5.2.3), Reduced VBW.
☒	Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.5.2.2), measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	

Test Method	
For conducted and cabinet radiation measurement, refer as KDB 789033, clause G)3).	
	For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	For KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.


Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation


The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.5.5 Test Setup

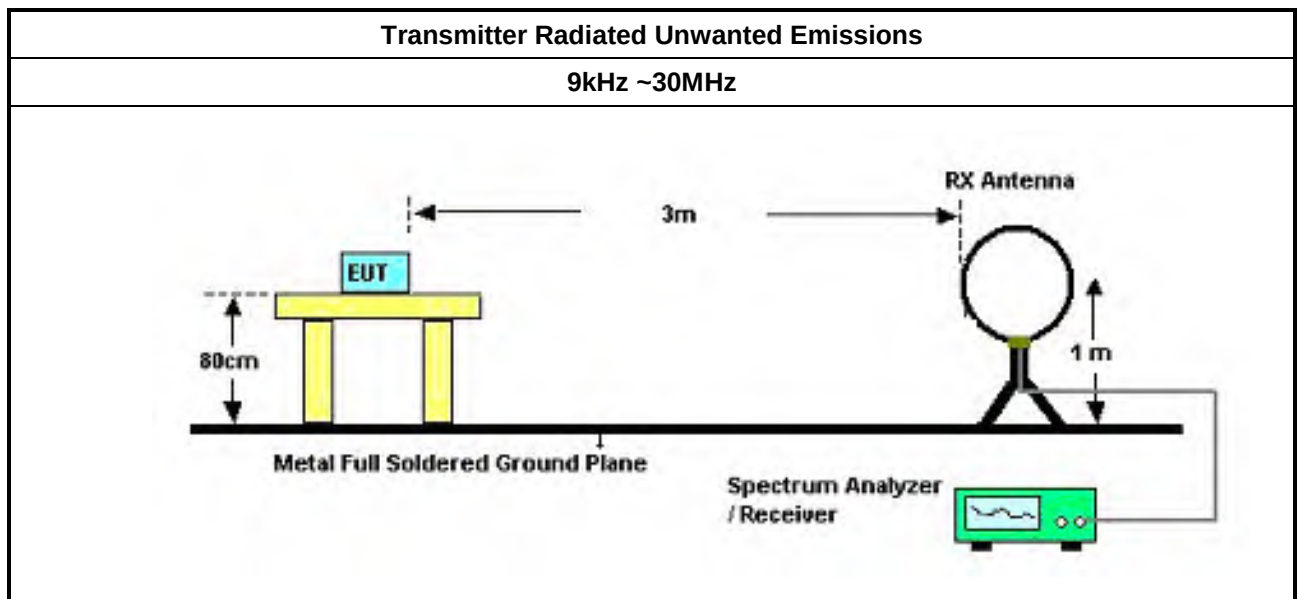

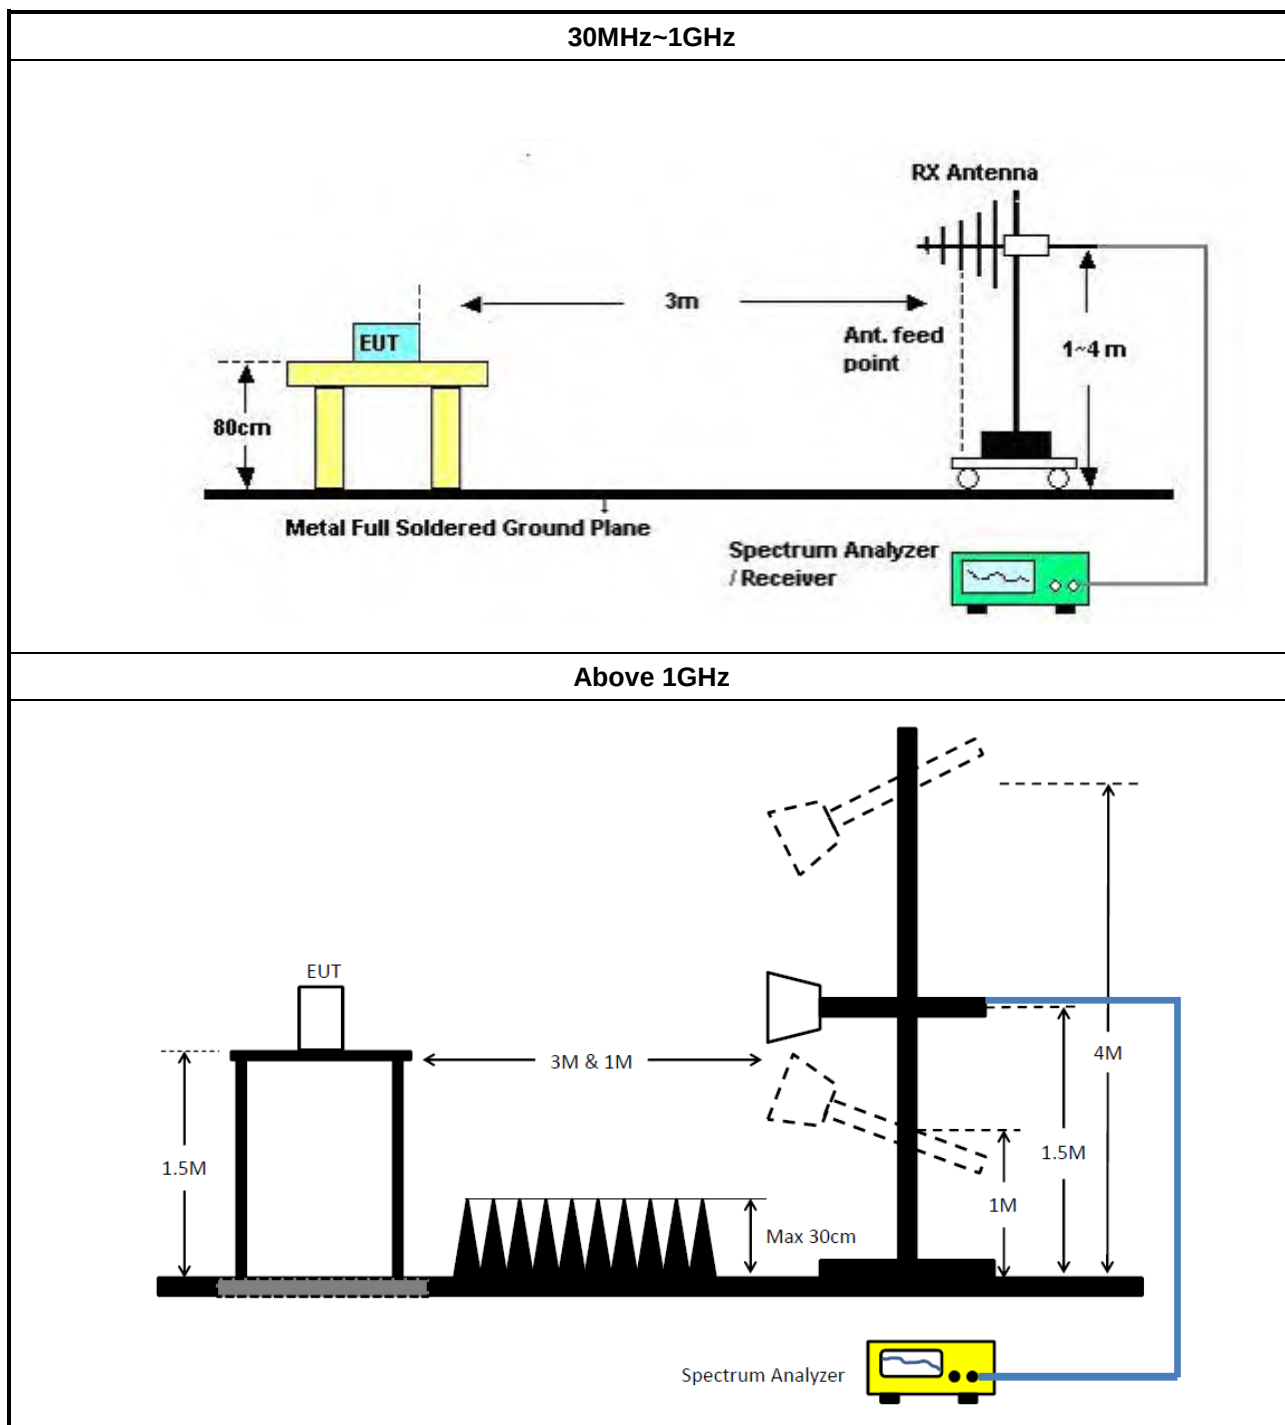

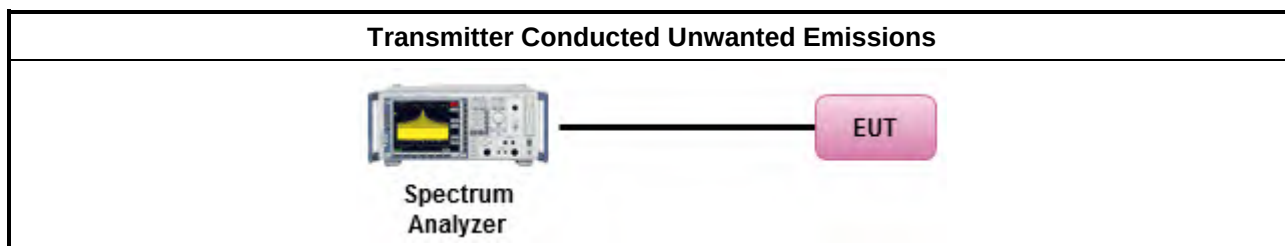

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	21/May/2025	20/May/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	100003	9kHz ~ 30MHz	18/Apr/2025	17/Apr/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	26/Feb/2025	25/Feb/2026
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	17/Oct/2024	16/Oct/2025
Software	Sporton	SENSE-EMI	V5.11.6	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	28/Oct/2024	27/Oct/2025
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	16/Oct/2024	15/Oct/2025
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	28/Mar/2025	27/Mar/2026
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	28/Mar/2025	27/Mar/2026
SENSE-15407_NII	Sporton	V5.11.24	N/A	N/A	N/A	N/A

**Instrument for Radiated Test (03CH24-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	30MHz~1GHz 3m	16/Aug/2024	15/Aug/2025
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	30/Jul/2024	29/Jul/2025
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	06/Dec/2024	05/Dec/2025
Signal Analyzer	ROHDE & SCHWARZ	FSV3044	101345	10Hz~44GHz	27/Aug/2024	26/Aug/2025
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	20/Mar/2025	19/Mar/2026
Bilog Antenna & 6dB Attenuator	TESEQ / Woken	CBL 6112D / 00800N1D01N-06	35376 / 02	30MHz~1GHz	13/Apr/2025	12/Apr/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	15/Aug/2024	14/Aug/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	04/Oct/2024	03/Oct/2025
RF Cable	HUBER+SUHNER	SUOFLEX 104	03CH24-cable-01	9kHz~40GHz	01/Oct/2024	30/Sep/2025
Pre-Amplifier	Aglient	8447D	2944A06292	30MHz~1GHz	08/Apr/2025	07/Apr/2026
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	12/Aug/2024	11/Aug/2025
Amplifier	EM	EM18G40GA	060874	18GHz ~40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.24	N/A	N/A	N/A	N/A

Instrument for Radiated Test (Co-location)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Site V.S.W.R	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz~18GHz 3M	12/Jul/2025	11/Jul/2026
Signal Analyzer	ROHDE & SCHWARZ	FSV3044	101750	10Hz~44GHz	10/Apr/2025	09/Apr/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02268	1GHz~18GHz	23/Sep/2024	22/Sep/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz~40GHz	02/Jul/2025	01/Jul/2026
RF Cable-R03m	HUBER+SUHNER	SUCOFLEX 104	03CH02-cable-04	1GHz~40GHz	17/Jul/2025	16/Jul/2026
Microwave Preamplifier	Agilent	8449B	3008A02373	1GHz~26.5GHz	01/Oct/2024	30/Sep/2025
Microwave Preamplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~40GHz	26/Apr/2025	25/Apr/2026
SENSE-EMI	Sporton	V5.11.9	N/A	N/A	N/A	N/A



Conducted Emissions at Powerline_Non-Beamforming_Radio 2 Appendix A.1


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	47.30	66.00	-18.70	Neutral


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	150.6k	46.19	65.96	-19.77	Line	-
Mode 1	Pass	AV	150.6k	32.82	55.96	-23.14	Line	-
Mode 1	Pass	QP	250.04k	34.29	61.76	-27.47	Line	-
Mode 1	Pass	AV	250.04k	22.67	51.76	-29.09	Line	-
Mode 1	Pass	QP	372.72k	20.89	58.45	-37.56	Line	-
Mode 1	Pass	AV	372.72k	14.63	48.45	-33.82	Line	-
Mode 1	Pass	QP	611.45k	20.09	56.00	-35.91	Line	-
Mode 1	Pass	AV	611.45k	16.33	46.00	-29.67	Line	-
Mode 1	Pass	QP	3.31M	19.80	56.00	-36.20	Line	-
Mode 1	Pass	AV	3.31M	15.34	46.00	-30.66	Line	-
Mode 1	Pass	QP	17.07M	28.65	60.00	-31.35	Line	-
Mode 1	Pass	AV	17.07M	23.14	50.00	-26.86	Line	-
Mode 1	Pass	QP	150k	47.30	66.00	-18.70	Neutral	-
Mode 1	Pass	AV	150k	33.22	56.00	-22.78	Neutral	-
Mode 1	Pass	QP	260.22k	35.30	61.43	-26.13	Neutral	-
Mode 1	Pass	AV	260.22k	24.15	51.43	-27.28	Neutral	-
Mode 1	Pass	QP	356.7k	23.75	58.81	-35.06	Neutral	-
Mode 1	Pass	AV	356.7k	15.51	48.81	-33.30	Neutral	-
Mode 1	Pass	QP	601.76k	24.19	56.00	-31.81	Neutral	-
Mode 1	Pass	AV	601.76k	20.35	46.00	-25.65	Neutral	-
Mode 1	Pass	QP	2.95M	18.15	56.00	-37.85	Neutral	-
Mode 1	Pass	AV	2.95M	15.08	46.00	-30.92	Neutral	-
Mode 1	Pass	QP	16.87M	29.88	60.00	-30.12	Neutral	-
Mode 1	Pass	AV	16.87M	25.55	50.00	-24.45	Neutral	-

Conducted Emissions at Powerline_Mode 1

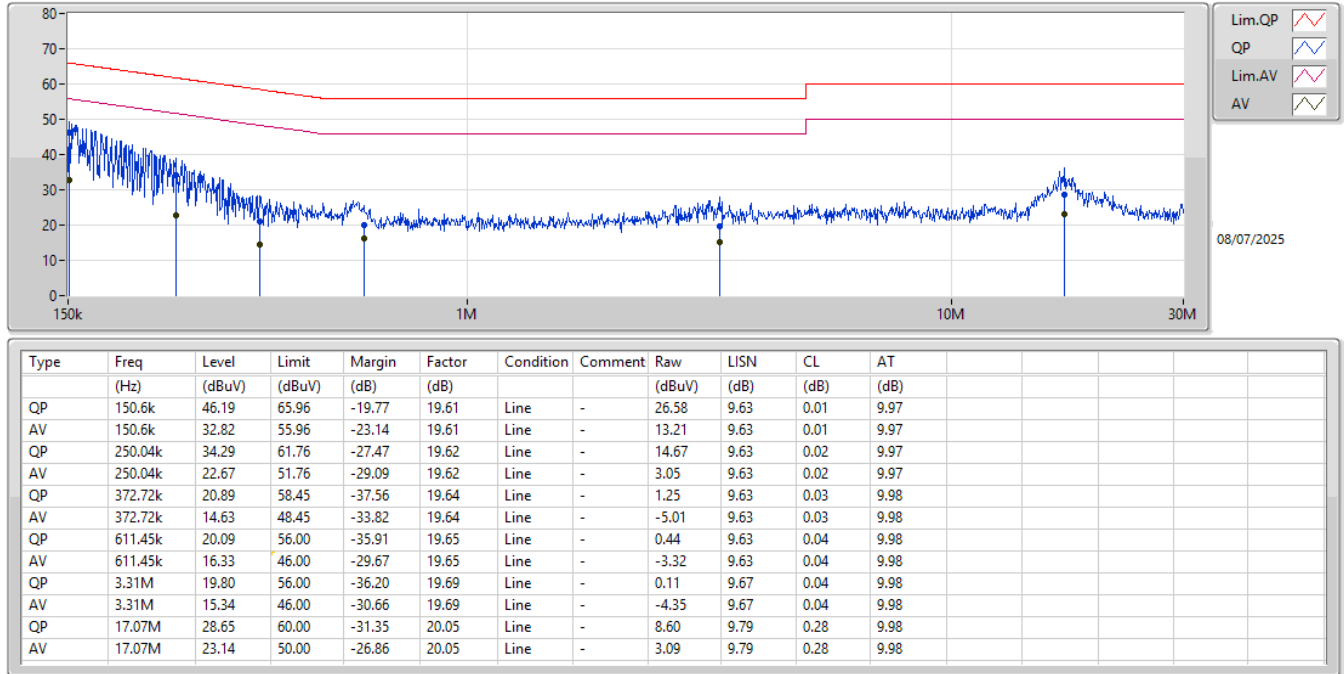

Conducted Emissions at Powerline_Mode 1

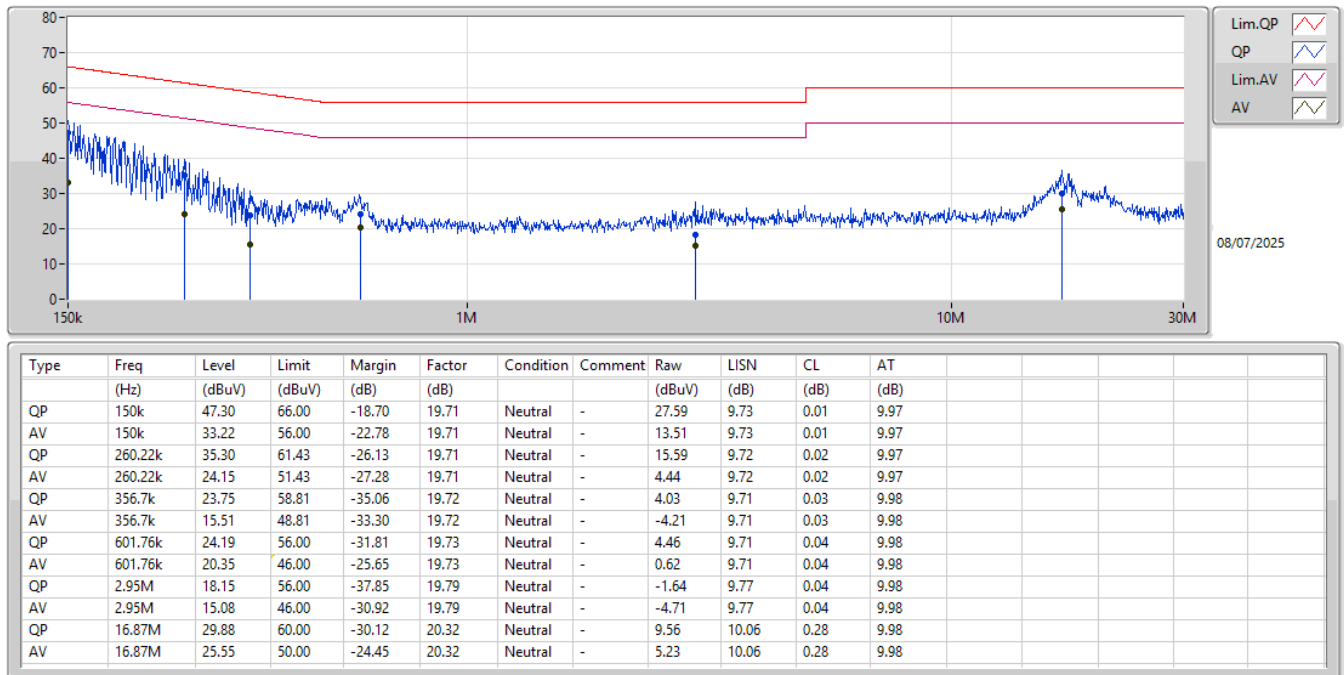



Conducted Emissions at Powerline_Non-Beamforming_ Scan Radio

Appendix A.2


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150k	46.78	66.00	-19.22	Neutral


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition	Comments
Mode 1	Pass	QP	151.81k	46.07	65.90	-19.83	Line	-
Mode 1	Pass	AV	151.81k	33.29	55.90	-22.61	Line	-
Mode 1	Pass	QP	261.26k	33.88	61.39	-27.51	Line	-
Mode 1	Pass	AV	261.26k	22.86	51.39	-28.53	Line	-
Mode 1	Pass	QP	356.7k	23.24	58.81	-35.57	Line	-
Mode 1	Pass	AV	356.7k	15.32	48.81	-33.49	Line	-
Mode 1	Pass	QP	628.77k	16.95	56.00	-39.05	Line	-
Mode 1	Pass	AV	628.77k	14.53	46.00	-31.47	Line	-
Mode 1	Pass	QP	3.31M	20.51	56.00	-35.49	Line	-
Mode 1	Pass	AV	3.31M	15.59	46.00	-30.41	Line	-
Mode 1	Pass	QP	17.56M	29.20	60.00	-30.80	Line	-
Mode 1	Pass	AV	17.56M	22.37	50.00	-27.63	Line	-
Mode 1	Pass	QP	150k	46.78	66.00	-19.22	Neutral	-
Mode 1	Pass	AV	150k	32.74	56.00	-23.26	Neutral	-
Mode 1	Pass	QP	256.1k	35.59	61.56	-25.97	Neutral	-
Mode 1	Pass	AV	256.1k	24.57	51.56	-26.99	Neutral	-
Mode 1	Pass	QP	477.38k	22.90	56.38	-33.48	Neutral	-
Mode 1	Pass	AV	477.38k	18.04	46.38	-28.34	Neutral	-
Mode 1	Pass	QP	606.58k	23.48	56.00	-32.52	Neutral	-
Mode 1	Pass	AV	606.58k	19.17	46.00	-26.83	Neutral	-
Mode 1	Pass	QP	3M	17.67	56.00	-38.33	Neutral	-
Mode 1	Pass	AV	3M	14.82	46.00	-31.18	Neutral	-
Mode 1	Pass	QP	17.56M	28.81	60.00	-31.19	Neutral	-
Mode 1	Pass	AV	17.56M	21.79	50.00	-28.21	Neutral	-

Conducted Emissions at Powerline_Mode 1

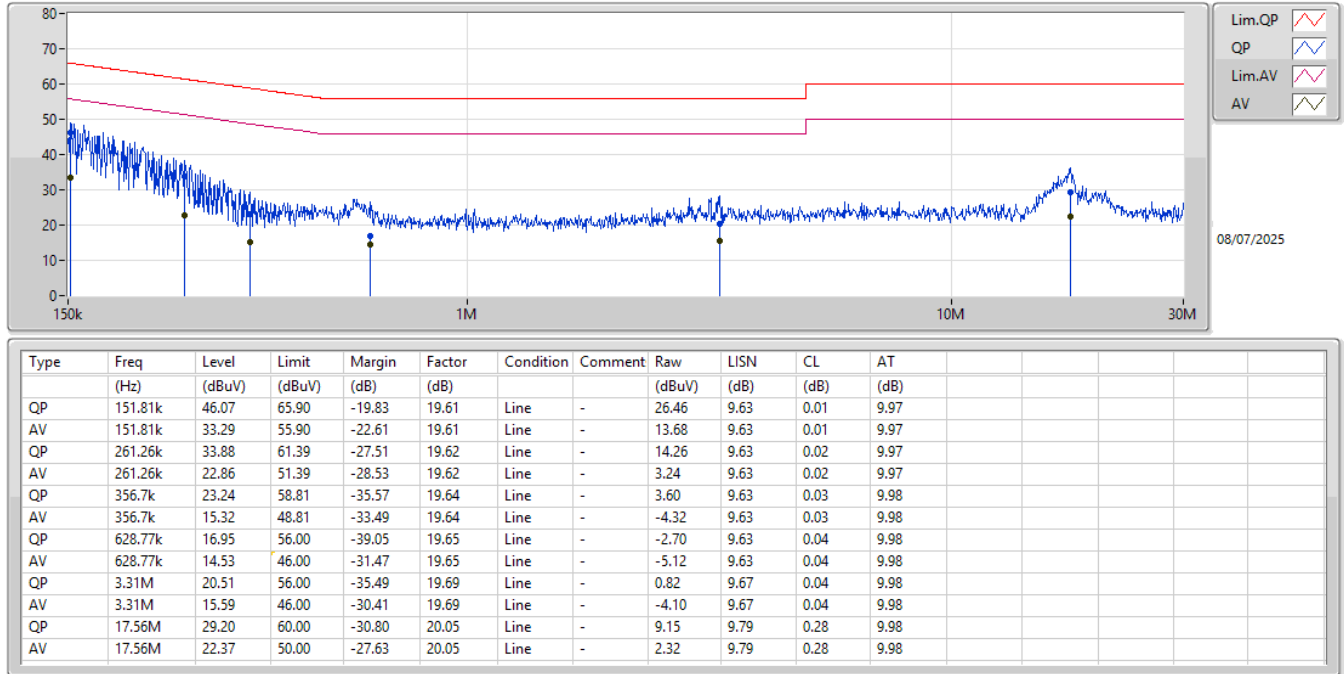

Conducted Emissions at Powerline_Mode 1

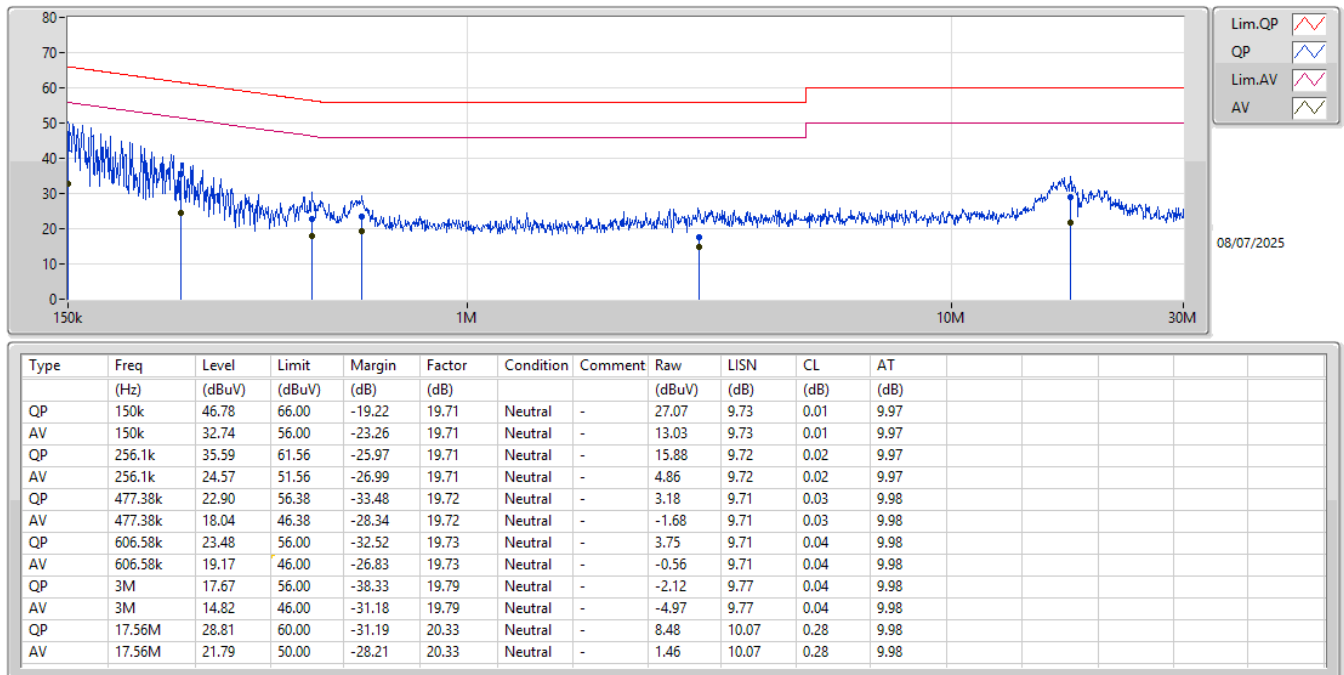



EBW_Non-Beamforming_ Radio 2_Downtilt Panel Omni_1T1S_Full RU

Appendix B.1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	16.5M	16.778M	16M8D1D	16.335M	16.646M
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	19.195M	19.09M	19M1D1D	19.03M	19.015M
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	38.17M	37.931M	37M9D1D	38.06M	37.931M
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	77.88M	77.461M	77M5D1D	77.88M	77.461M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



**EBW_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Full RU**

Appendix B.1

Result

Mode	Result	Limit (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-
5745MHz	Pass	500k	16.5M	16.712M
5785MHz	Pass	500k	16.335M	16.646M
5825MHz	Pass	500k	16.39M	16.778M
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-
5745MHz	Pass	500k	19.195M	19.09M
5785MHz	Pass	500k	19.085M	19.015M
5825MHz	Pass	500k	19.03M	19.09M
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-
5755MHz	Pass	500k	38.17M	37.931M
5795MHz	Pass	500k	38.06M	37.931M
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-
5775MHz	Pass	500k	77.88M	77.461M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

EBW

5745MHz

16/06/2025

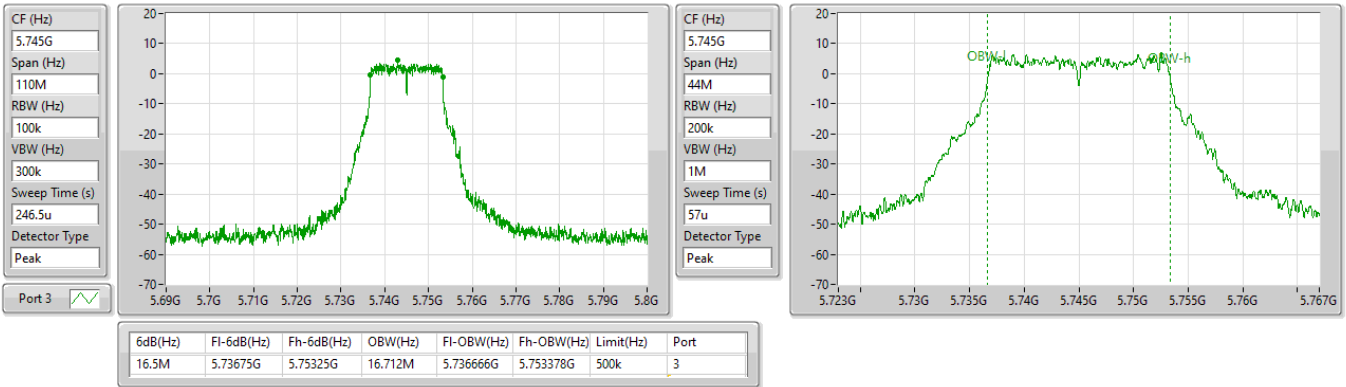


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

EBW

5745MHz

16/06/2025


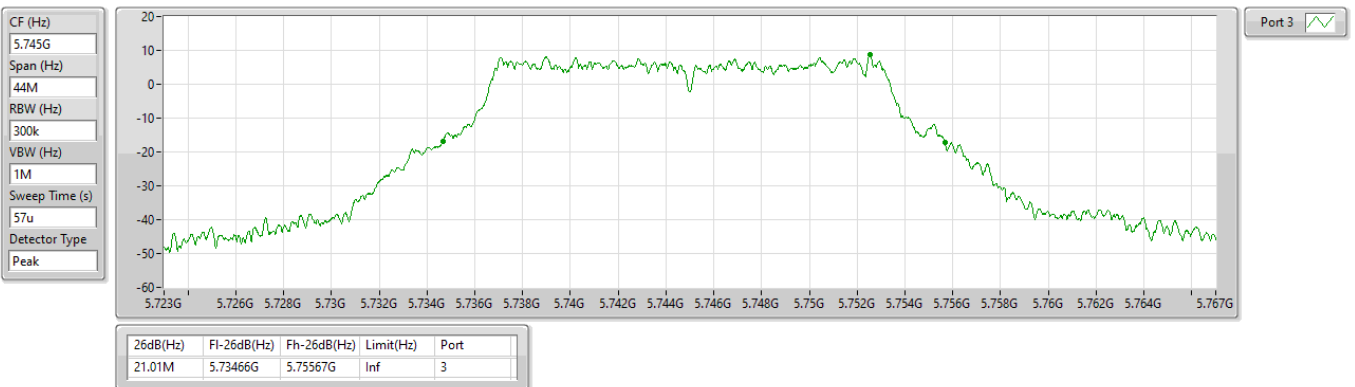


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

EBW

5745MHz

16/06/2025

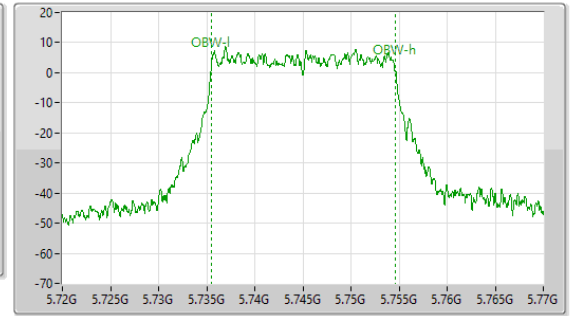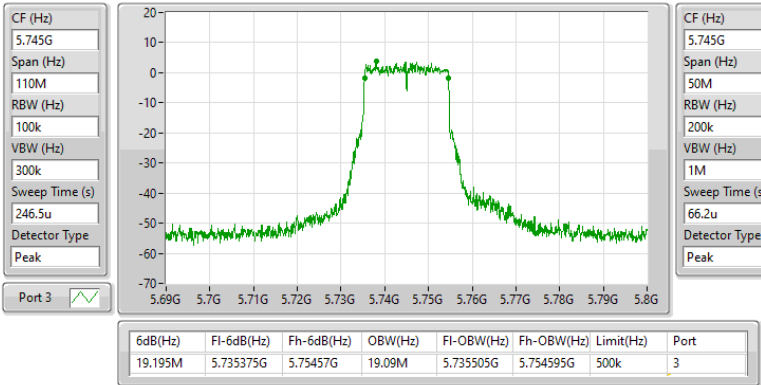


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

EBW

5745MHz

16/06/2025

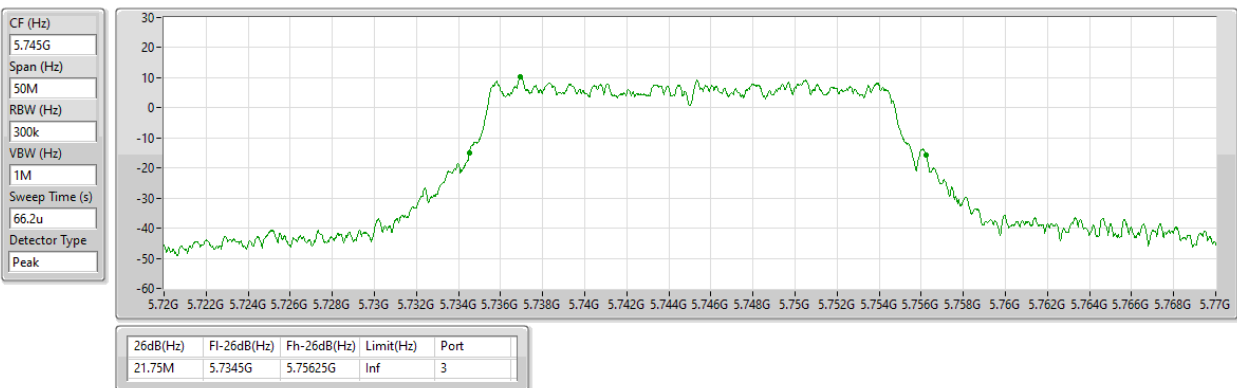


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

EBW

5755MHz

16/06/2025

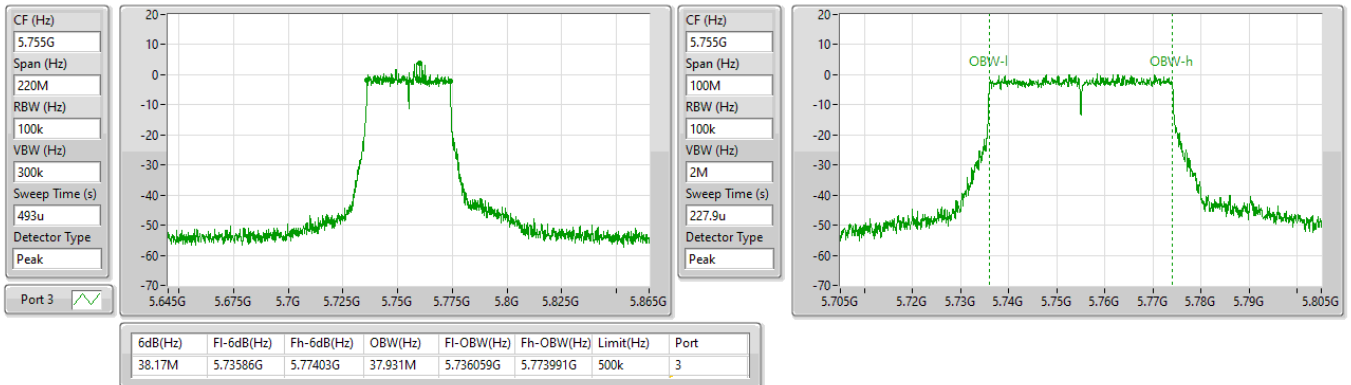


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

EBW

5755MHz

16/06/2025

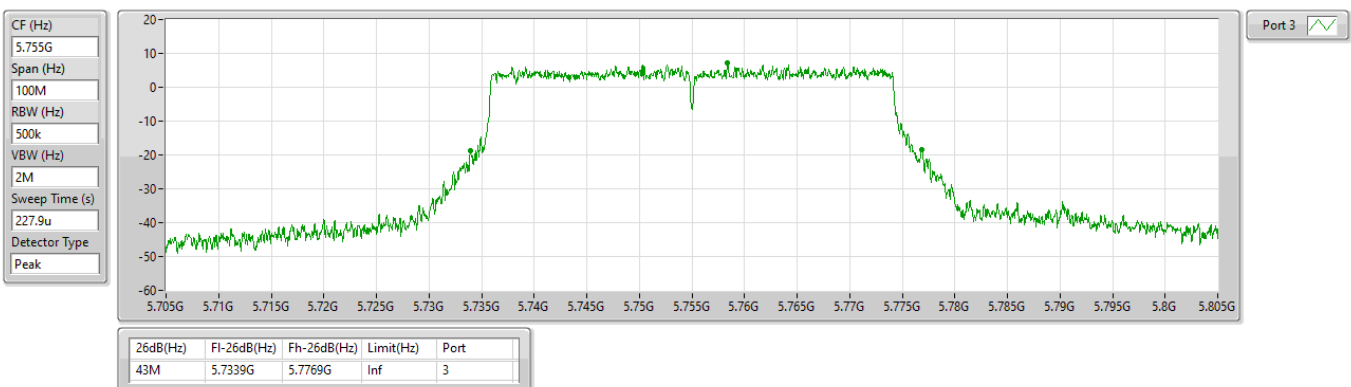


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

EBW

5775MHz

16/06/2025

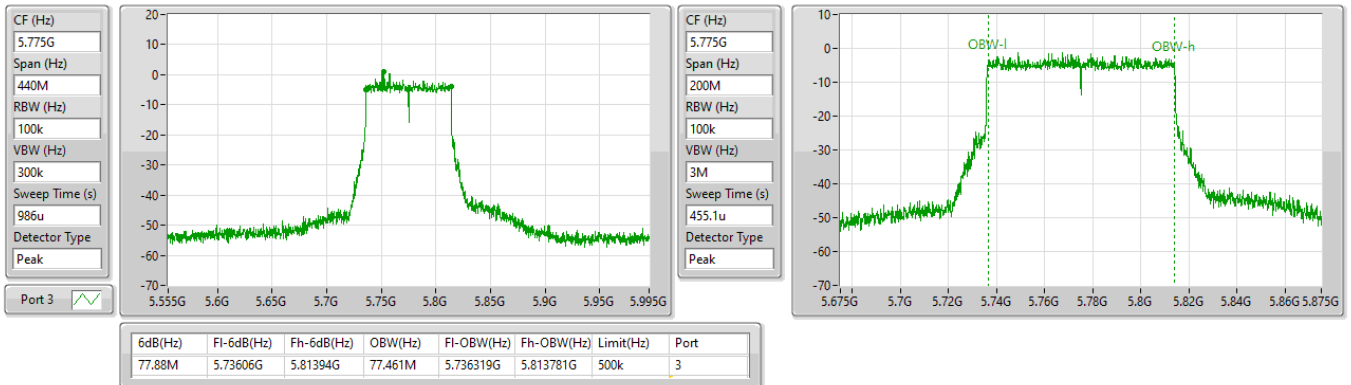


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

EBW

5775MHz

16/06/2025

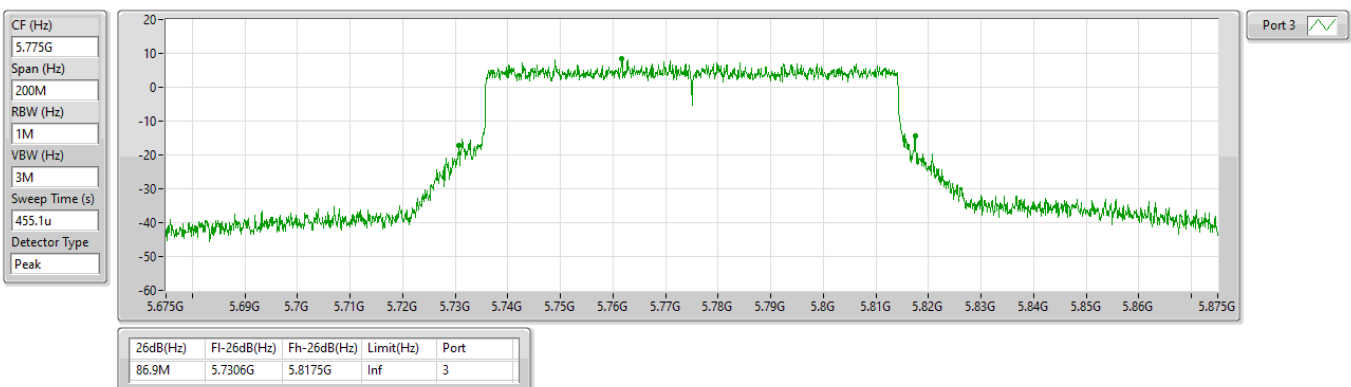



EBW_Non-Beamforming_ Radio 2_Downtilt Panel Omni_2T1S_Full RU

Appendix B.2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	16.555M	16.734M	16M7D1D	16.335M	16.558M
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	19.14M	19.115M	19M1D1D	19.03M	18.991M
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	38.28M	37.981M	38M0D1D	38.06M	37.881M
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	78.32M	77.761M	77M8D1D	77.88M	77.561M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



EBW_Non-Beamforming_ Radio 2_Downtilt Panel Omni_2T1S_Full RU

Appendix B.2

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	500k	16.39M	16.558M	16.39M	16.734M
5785MHz	Pass	500k	16.335M	16.624M	16.445M	16.58M
5825MHz	Pass	500k	16.555M	16.58M	16.39M	16.58M
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	500k	19.14M	19.015M	19.14M	19.04M
5785MHz	Pass	500k	19.14M	18.991M	19.03M	19.04M
5825MHz	Pass	500k	19.03M	19.065M	19.14M	19.115M
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5755MHz	Pass	500k	38.28M	37.981M	38.28M	37.931M
5795MHz	Pass	500k	38.06M	37.881M	38.17M	37.881M
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	500k	77.88M	77.561M	78.32M	77.761M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

EBW

5825MHz

14/06/2025

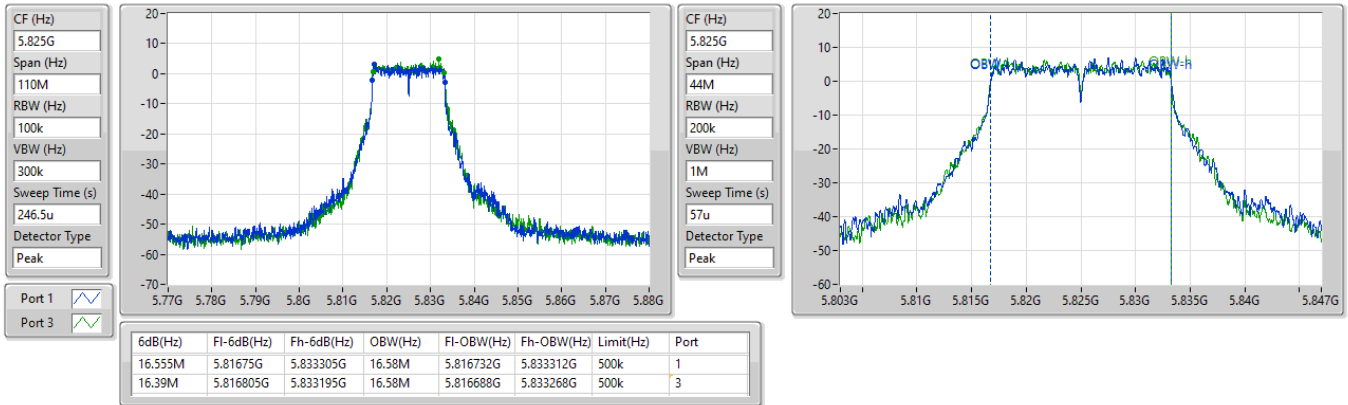


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

EBW

5825MHz

14/06/2025

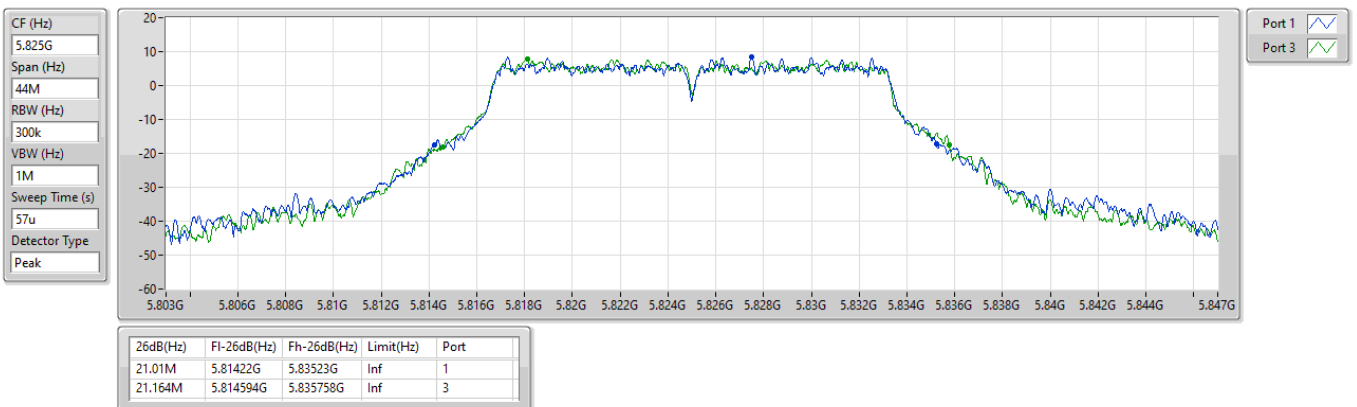


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5745MHz

14/06/2025

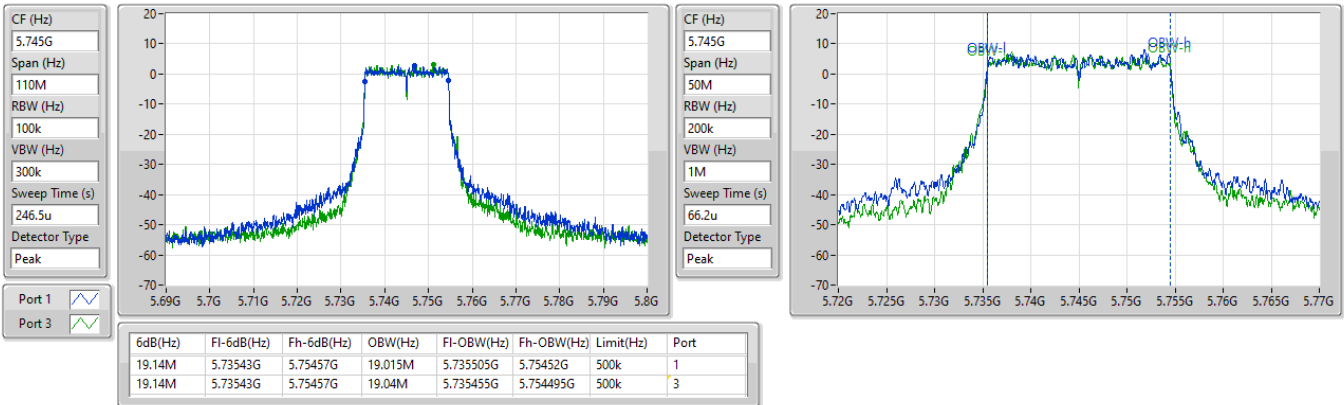


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5745MHz

14/06/2025

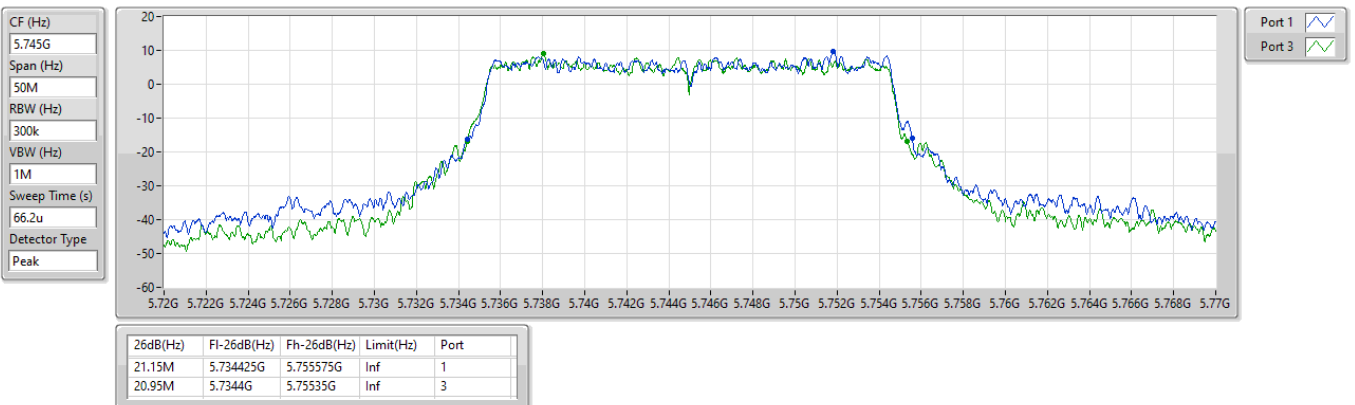


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5755MHz

17/06/2025

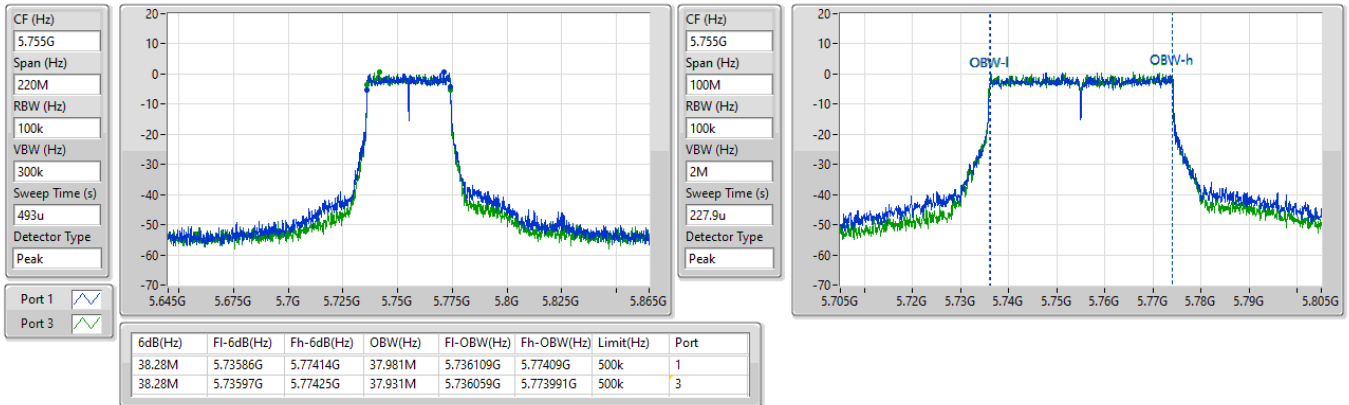


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5755MHz

17/06/2025

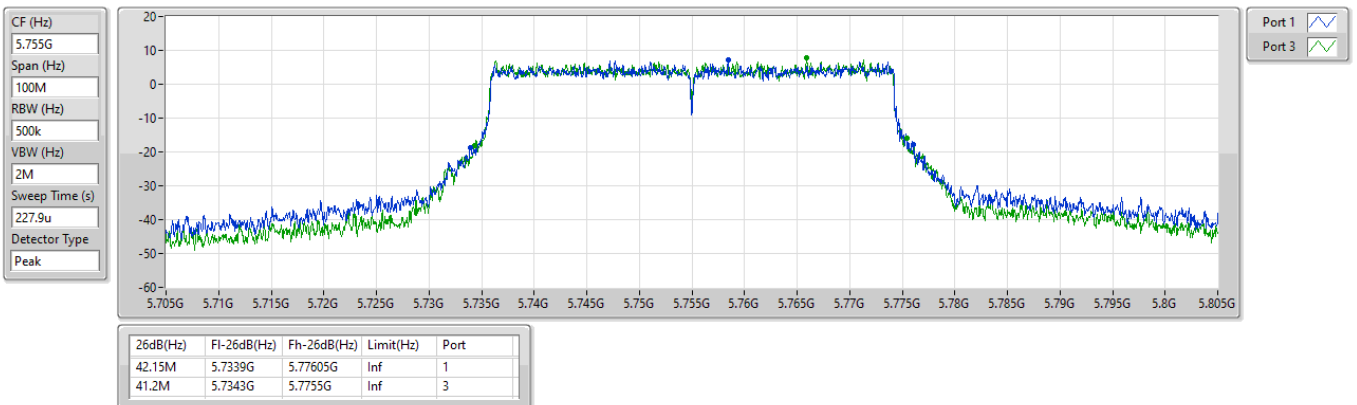


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5775MHz

17/06/2025

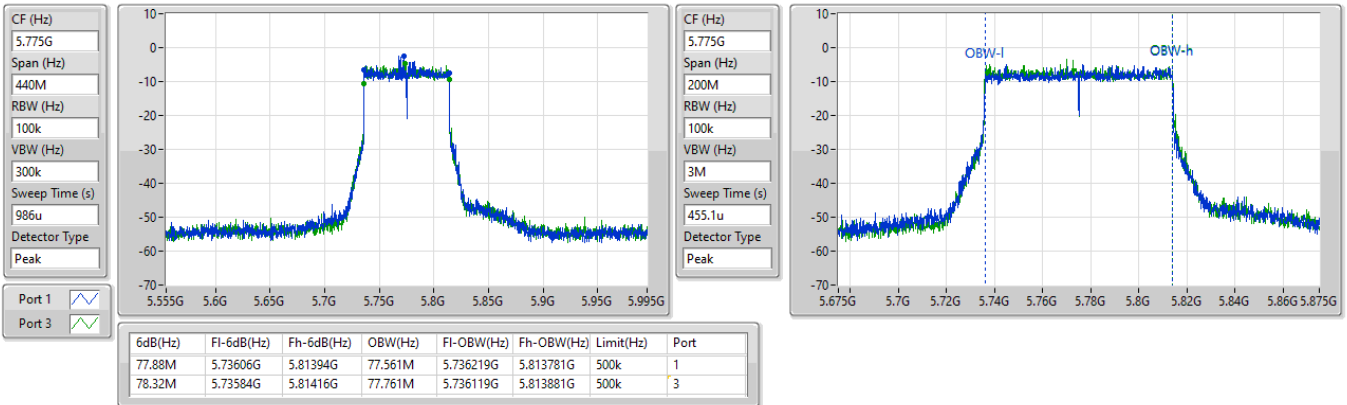


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5775MHz

17/06/2025

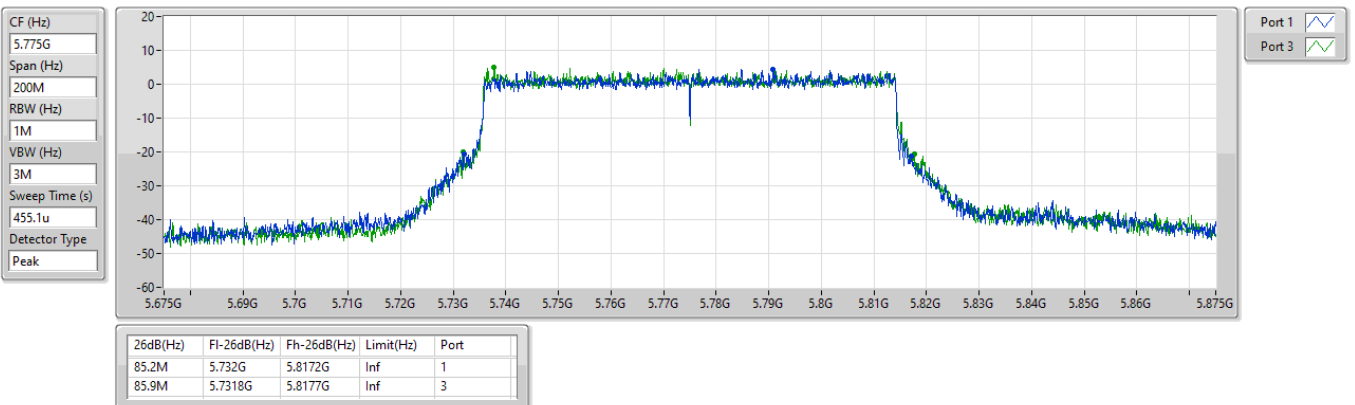



EBW_Non-Beamforming_ Radio 2_Downtilt Panel Omni_4T1S_Full RU

Appendix B.3

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.61M	16.888M	16M9D1D	16.28M	16.558M
802.11be EHT20_Nss1,(MCS0)_4TX	19.195M	19.215M	19M2D1D	19.03M	18.991M
802.11be EHT40_Nss1,(MCS0)_4TX	38.28M	37.981M	38M0D1D	38.06M	37.881M
802.11be EHT80_Nss1,(MCS0)_4TX	78.32M	77.661M	77M7D1D	76.56M	77.461M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



EBW_Non-Beamforming_ Radio 2_Downtilt Panel Omni_4T1S_Full RU

Appendix B.3

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	500k	16.555M	16.69M	16.28M	16.734M	16.39M	16.69M	16.39M	16.888M
5785MHz	Pass	500k	16.61M	16.58M	16.335M	16.558M	16.555M	16.58M	16.39M	16.646M
5825MHz	Pass	500k	16.555M	16.602M	16.28M	16.734M	16.61M	16.734M	16.335M	16.69M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	500k	19.03M	19.215M	19.085M	19.215M	19.14M	18.991M	19.03M	19.14M
5785MHz	Pass	500k	19.085M	19.04M	19.03M	19.04M	19.085M	19.04M	19.195M	19.04M
5825MHz	Pass	500k	19.085M	19.04M	19.085M	19.04M	19.195M	18.991M	19.14M	19.04M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	500k	38.17M	37.931M	38.17M	37.981M	38.06M	37.881M	38.17M	37.981M
5795MHz	Pass	500k	38.17M	37.931M	38.28M	37.931M	38.28M	37.881M	38.28M	37.881M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	500k	78.32M	77.461M	78.1M	77.561M	78.32M	77.561M	76.56M	77.661M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5785MHz

17/06/2025

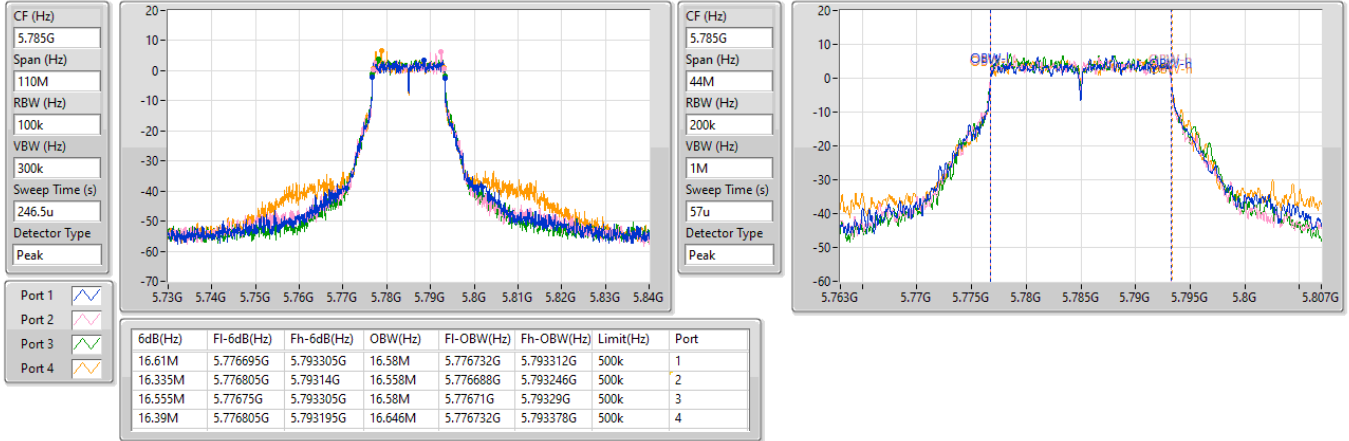


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5785MHz

17/06/2025

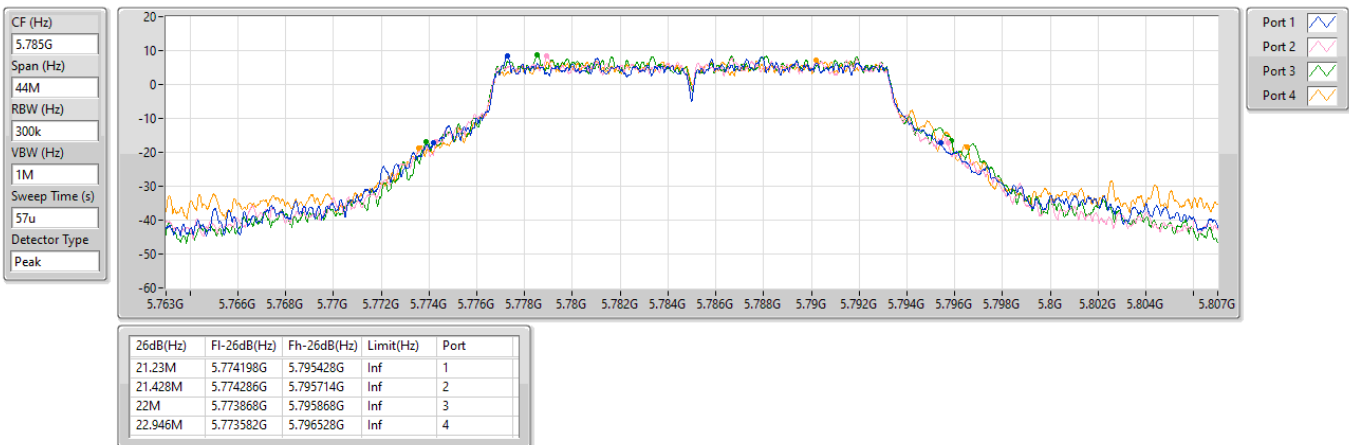




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5785MHz

17/06/2025

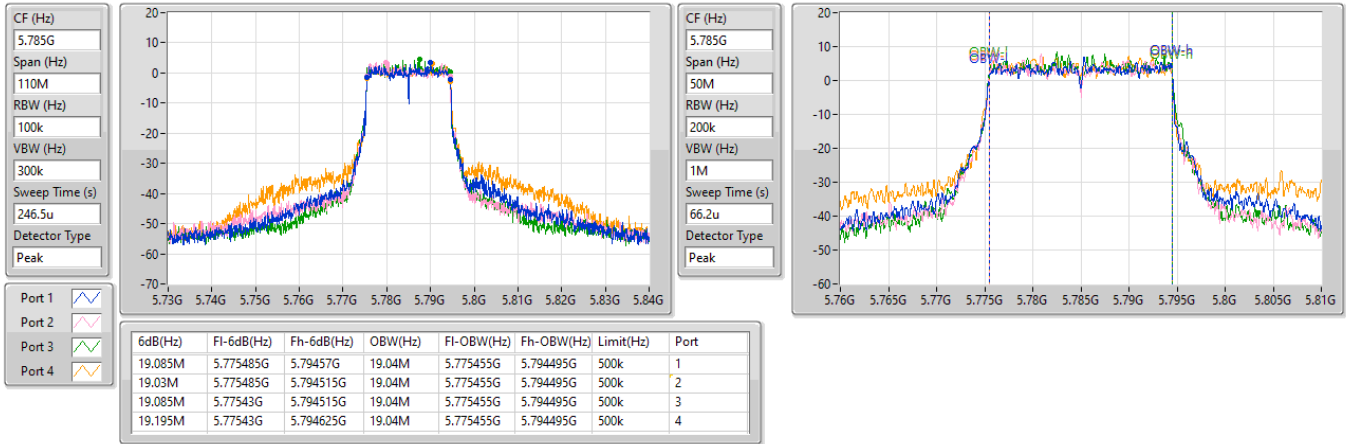


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5785MHz

17/06/2025

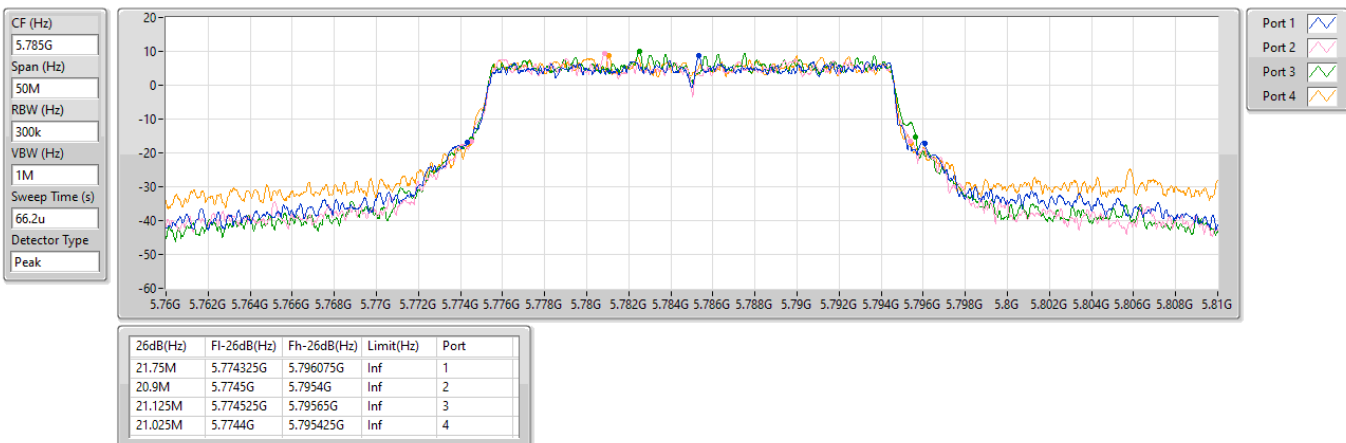


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5795MHz

17/06/2025

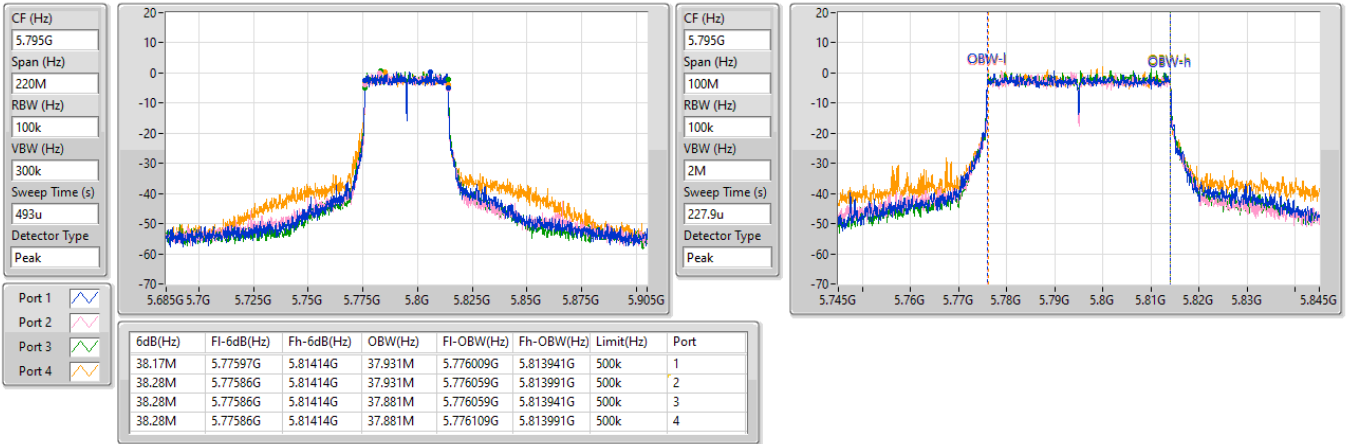


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5795MHz

17/06/2025

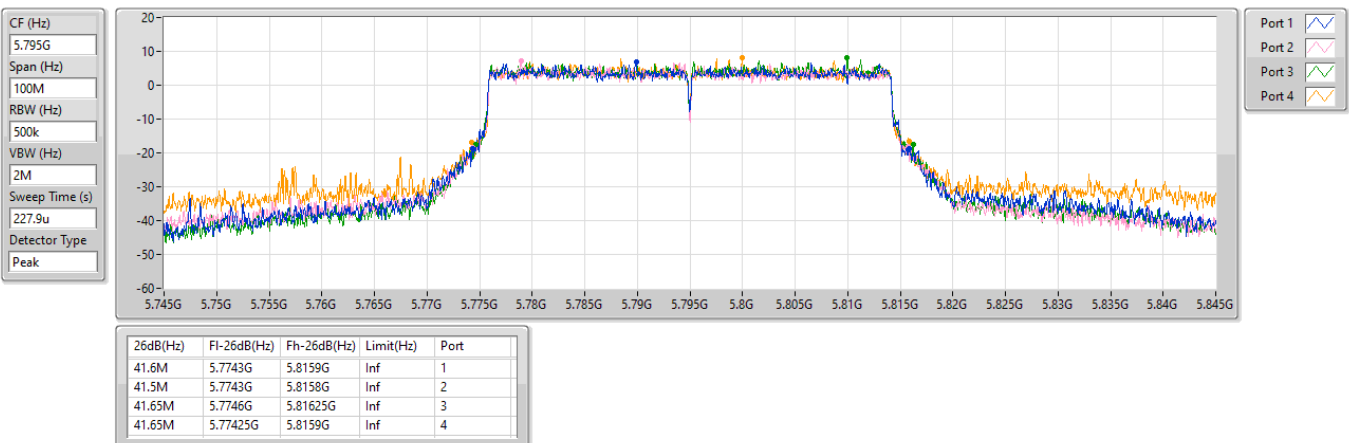


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5775MHz

17/06/2025

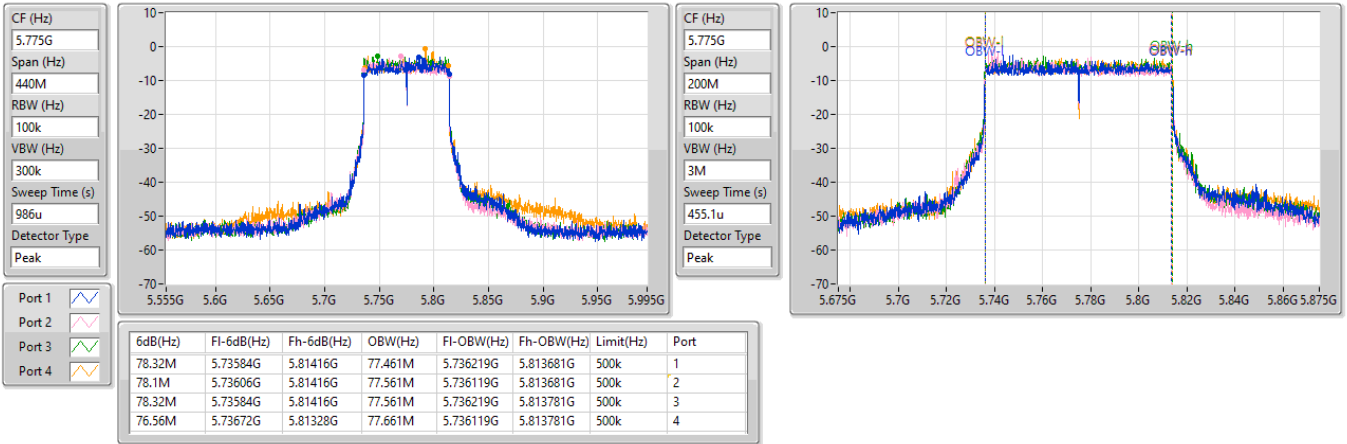


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5775MHz

17/06/2025

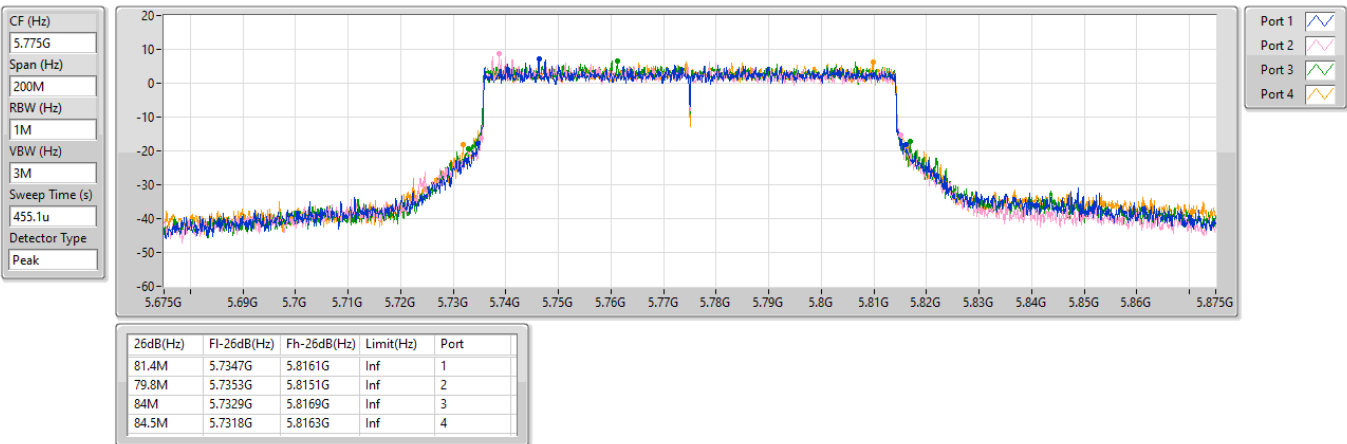



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	16.5M	16.778M	16M8D1D	16.335M	16.646M
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	19.195M	19.09M	19M1D1D	19.03M	19.015M
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	38.17M	37.931M	37M9D1D	38.06M	37.931M
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	77.88M	77.461M	77M5D1D	77.88M	77.461M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

**Result**

Mode	Result	Limit (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-
5745MHz	Pass	500k	16.5M	16.712M
5785MHz	Pass	500k	16.335M	16.646M
5825MHz	Pass	500k	16.39M	16.778M
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-
5745MHz	Pass	500k	19.195M	19.09M
5785MHz	Pass	500k	19.085M	19.015M
5825MHz	Pass	500k	19.03M	19.09M
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-
5755MHz	Pass	500k	38.17M	37.931M
5795MHz	Pass	500k	38.06M	37.931M
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-
5775MHz	Pass	500k	77.88M	77.461M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

EBW

5745MHz

16/06/2025

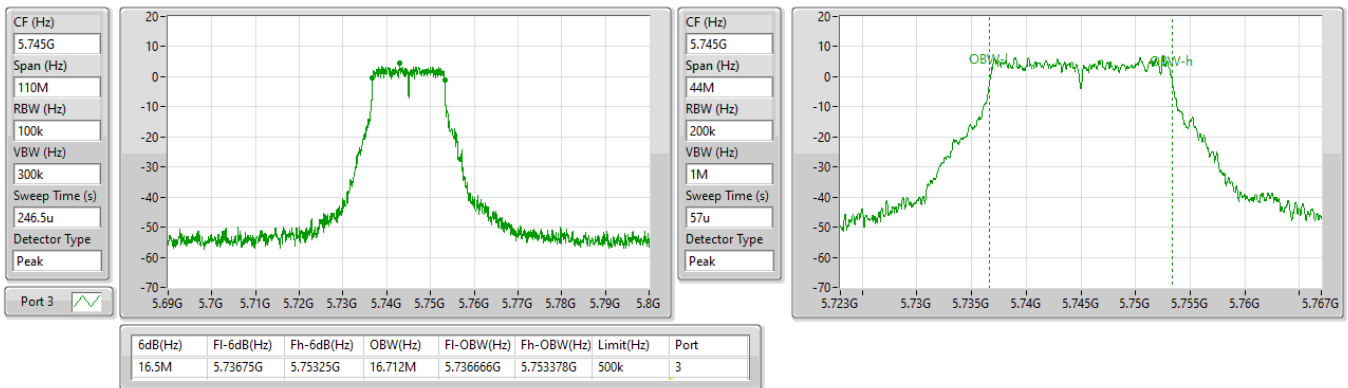


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

EBW

5745MHz

16/06/2025


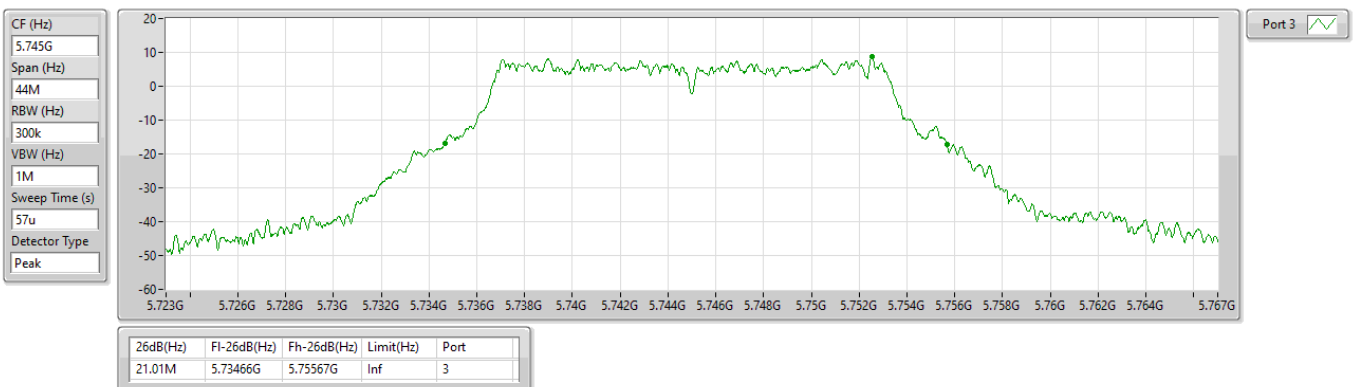


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

EBW

5745MHz

16/06/2025

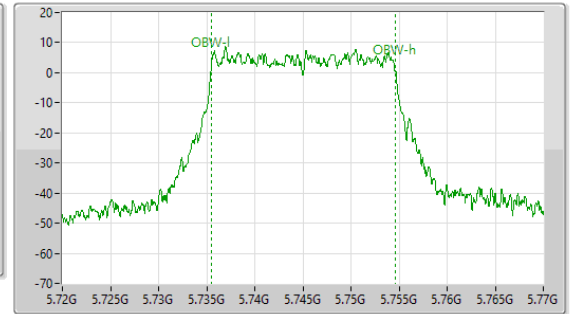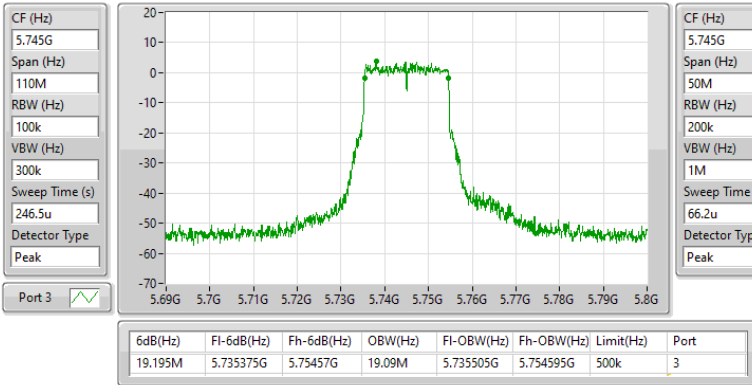


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

EBW

5745MHz

16/06/2025


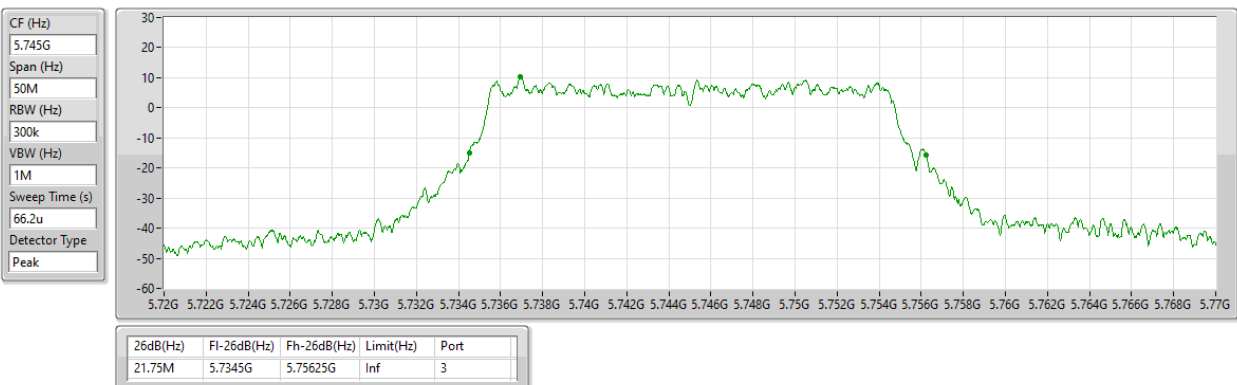


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

EBW

5755MHz

16/06/2025

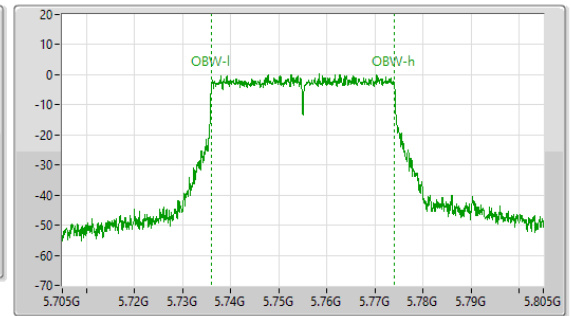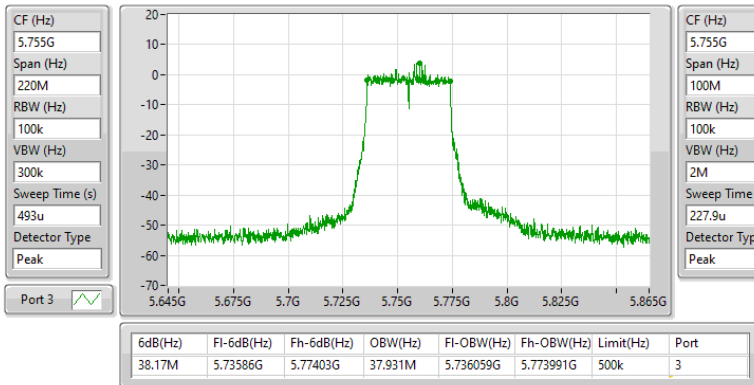


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

EBW

5755MHz

16/06/2025

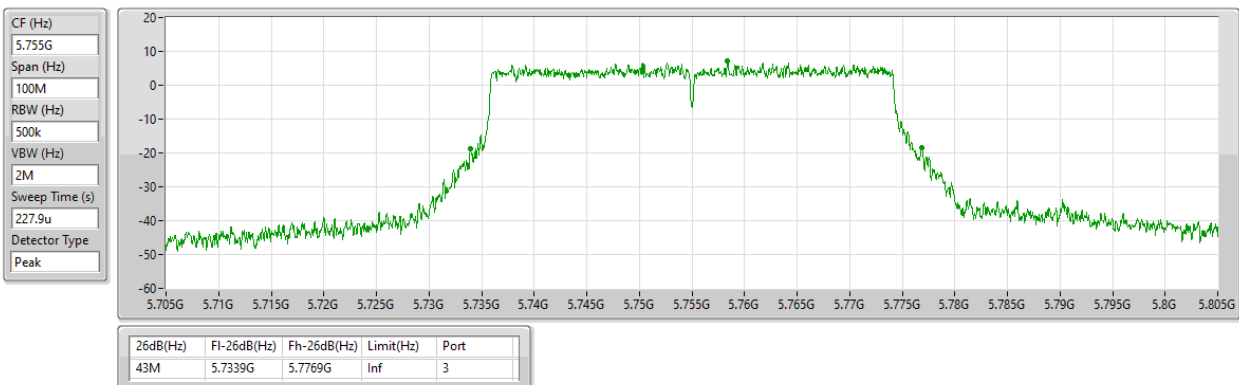


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

EBW

5775MHz

16/06/2025

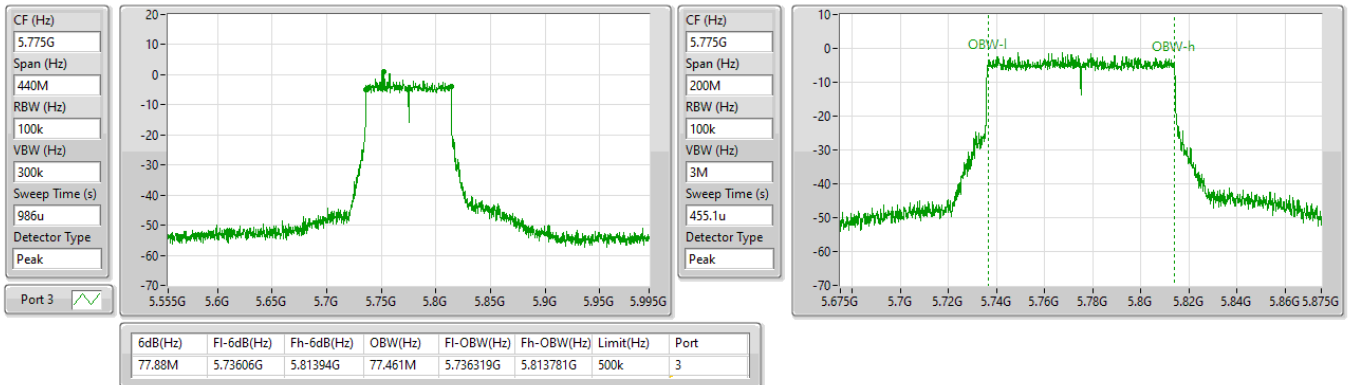


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

EBW

5775MHz

16/06/2025

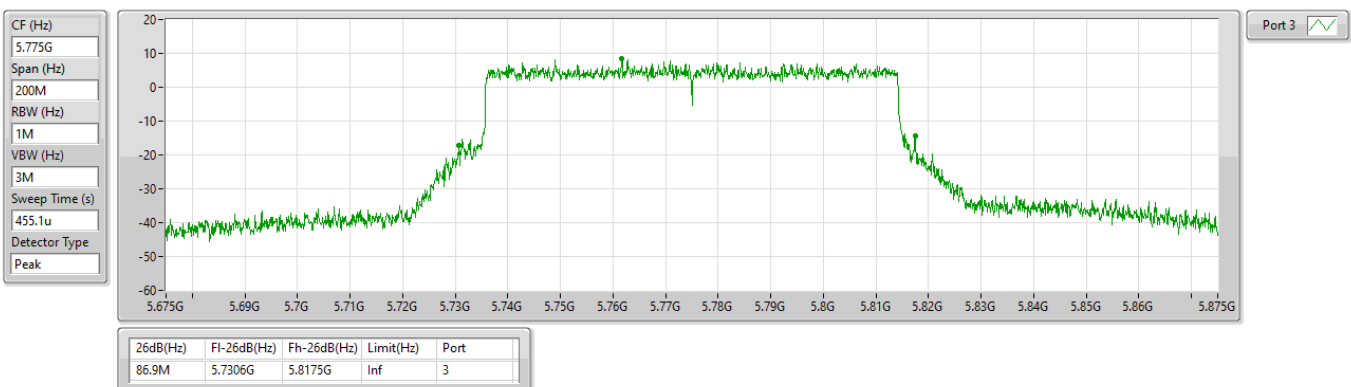



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	16.555M	16.734M	16M7D1D	16.335M	16.558M
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	19.14M	19.115M	19M1D1D	19.03M	18.991M
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	38.28M	37.931M	37M9D1D	38.06M	37.881M
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	78.32M	77.561M	77M6D1D	78.1M	77.561M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	500k	16.39M	16.558M	16.39M	16.734M
5785MHz	Pass	500k	16.335M	16.624M	16.445M	16.58M
5825MHz	Pass	500k	16.555M	16.58M	16.39M	16.58M
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	500k	19.14M	19.015M	19.14M	19.04M
5785MHz	Pass	500k	19.14M	18.991M	19.03M	19.04M
5825MHz	Pass	500k	19.03M	19.065M	19.14M	19.115M
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5755MHz	Pass	500k	38.06M	37.931M	38.28M	37.931M
5795MHz	Pass	500k	38.06M	37.881M	38.17M	37.881M
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	500k	78.32M	77.561M	78.1M	77.561M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

EBW

5825MHz

14/06/2025

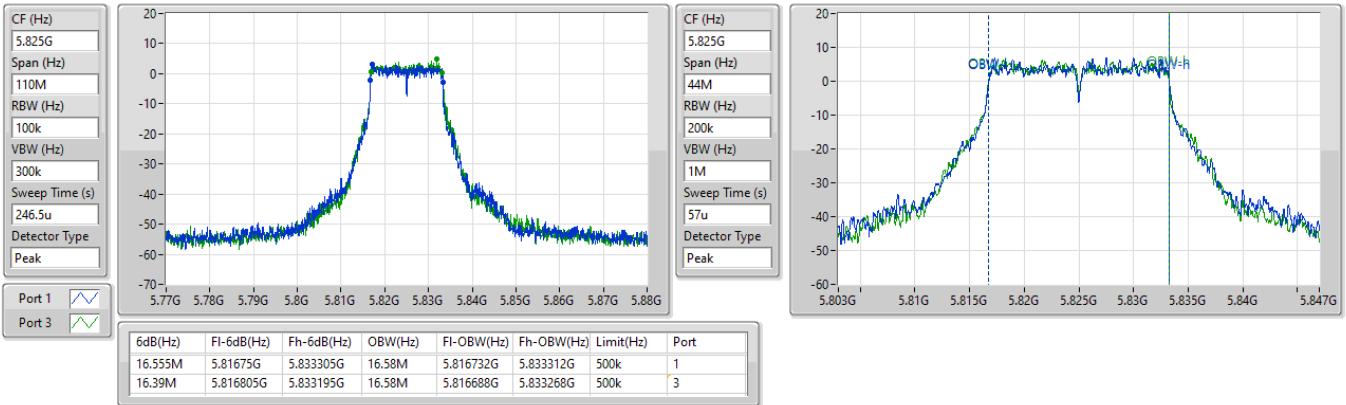


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

EBW

5825MHz

14/06/2025

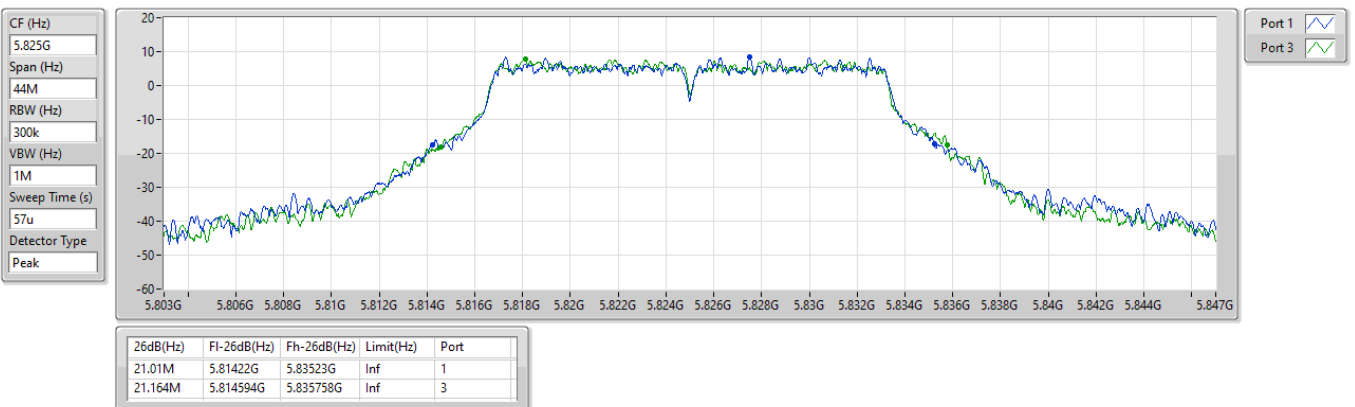


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5745MHz

14/06/2025

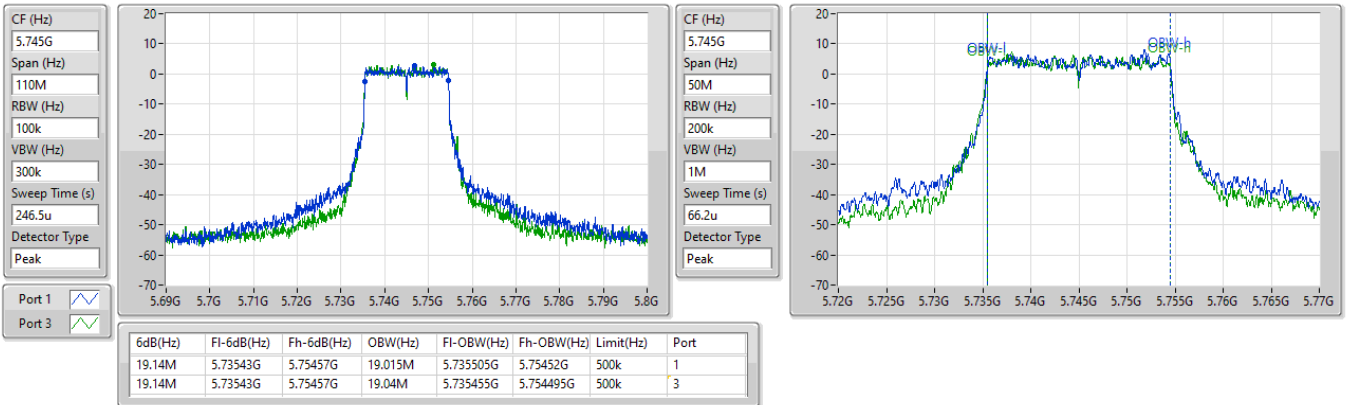


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5745MHz

14/06/2025

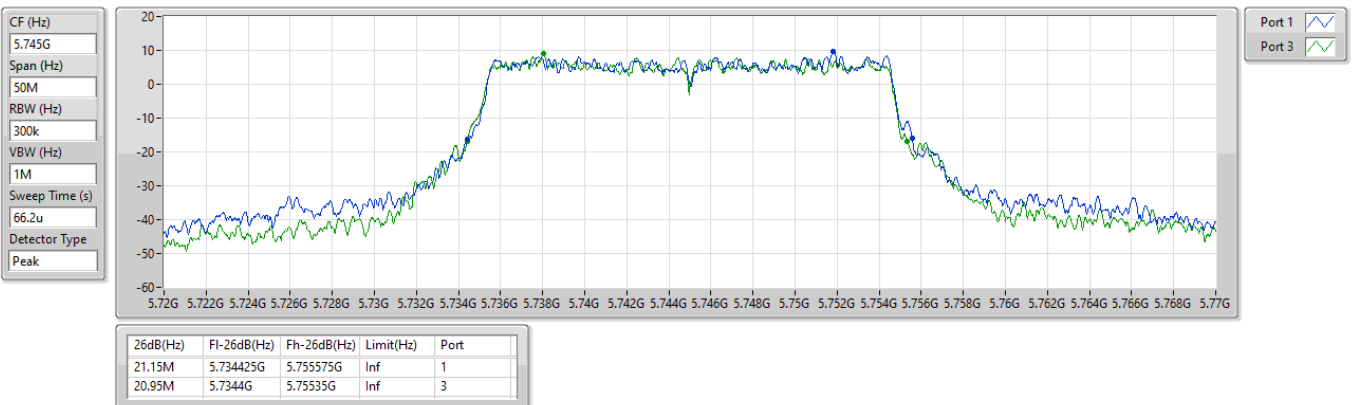


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5755MHz

14/06/2025

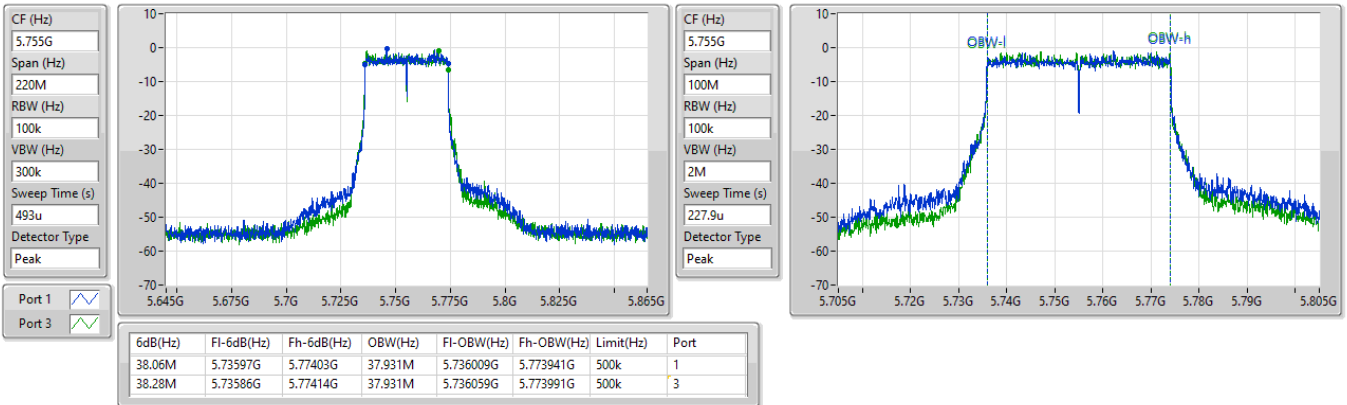


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5755MHz

14/06/2025

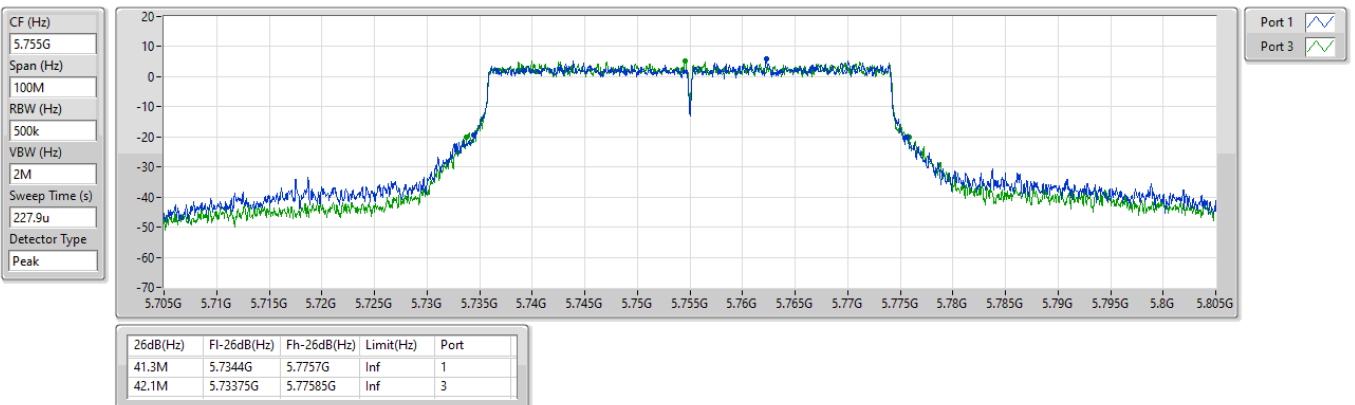


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5775MHz

14/06/2025

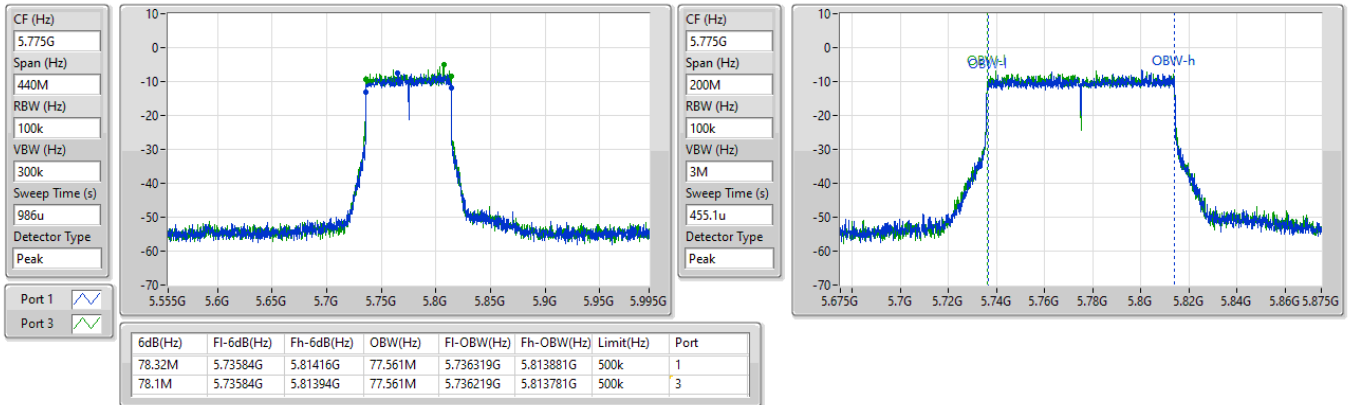


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

EBW

5775MHz

14/06/2025

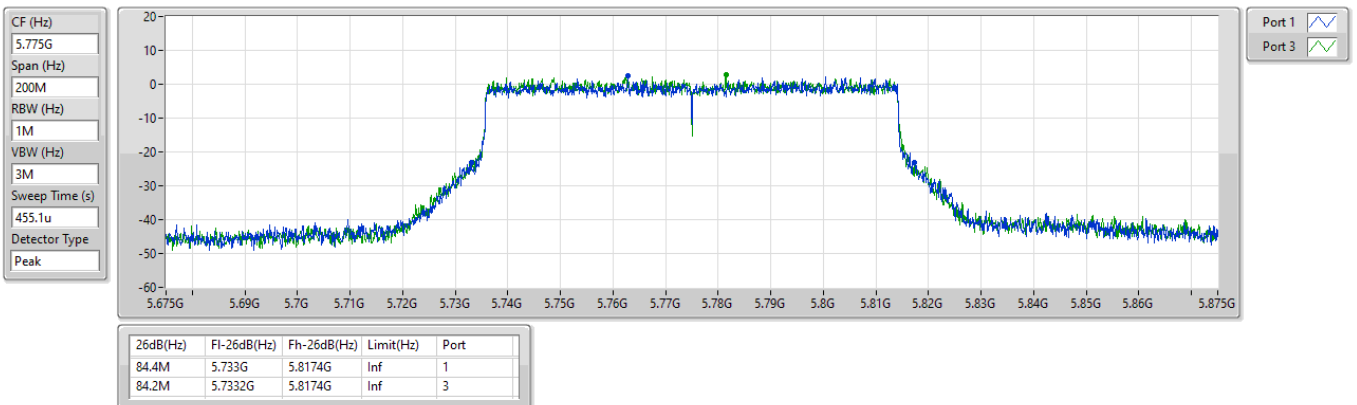



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.555M	16.932M	16M9D1D	16.335M	16.536M
802.11be EHT20_Nss1,(MCS0)_4TX	19.195M	19.29M	19M3D1D	18.205M	18.966M
802.11be EHT40_Nss1,(MCS0)_4TX	38.28M	38.031M	38M0D1D	37.62M	37.831M
802.11be EHT80_Nss1,(MCS0)_4TX	78.32M	77.561M	77M6D1D	77.88M	77.361M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	500k	16.555M	16.712M	16.5M	16.932M	16.335M	16.734M	16.5M	16.602M
5785MHz	Pass	500k	16.39M	16.536M	16.445M	16.844M	16.555M	16.8M	16.5M	16.734M
5825MHz	Pass	500k	16.335M	16.558M	16.5M	16.646M	16.5M	16.822M	16.39M	16.712M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	500k	19.03M	18.991M	19.085M	18.966M	19.14M	18.966M	19.085M	19.065M
5785MHz	Pass	500k	19.085M	18.991M	19.085M	19.29M	19.14M	19.09M	19.14M	19.115M
5825MHz	Pass	500k	18.205M	19.015M	19.195M	19.04M	19.03M	18.966M	19.14M	19.09M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	500k	37.62M	38.031M	37.95M	38.031M	38.06M	37.881M	38.28M	37.981M
5795MHz	Pass	500k	38.17M	37.881M	38.06M	37.831M	38.17M	37.881M	38.28M	37.831M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	500k	78.32M	77.361M	78.32M	77.561M	78.32M	77.561M	77.88M	77.561M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5745MHz

13/06/2025

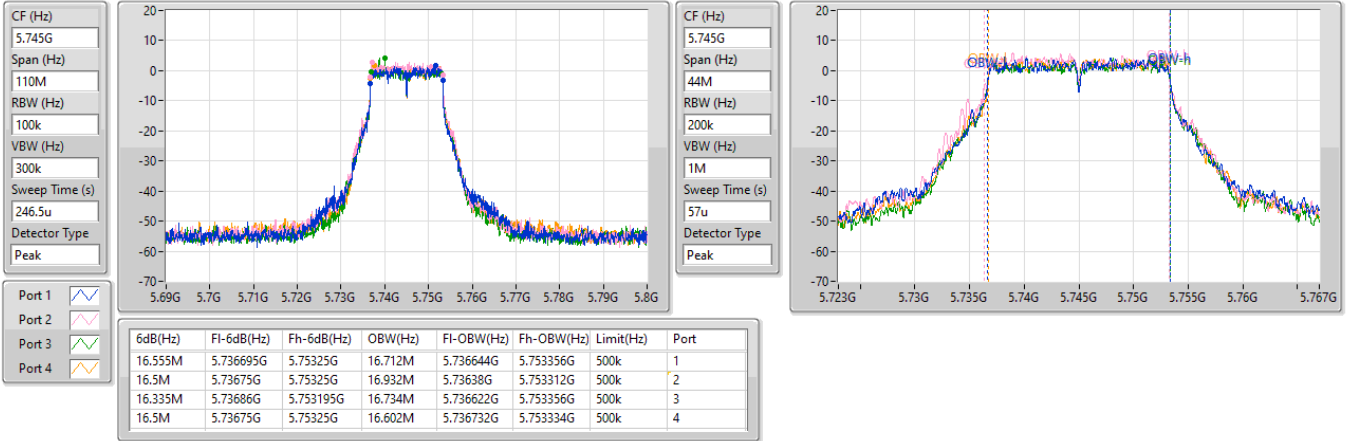


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5745MHz

13/06/2025

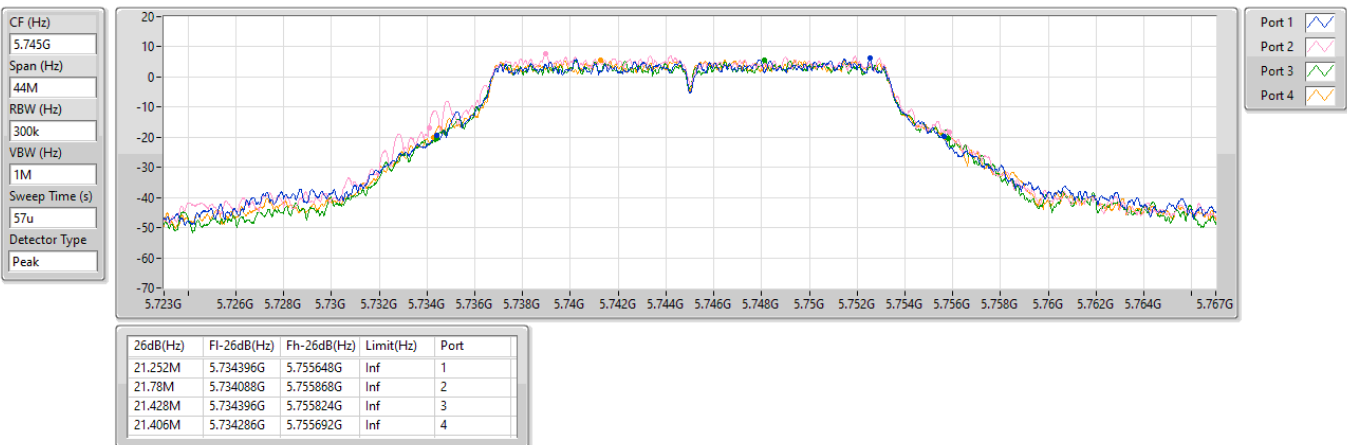


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5825MHz

13/06/2025

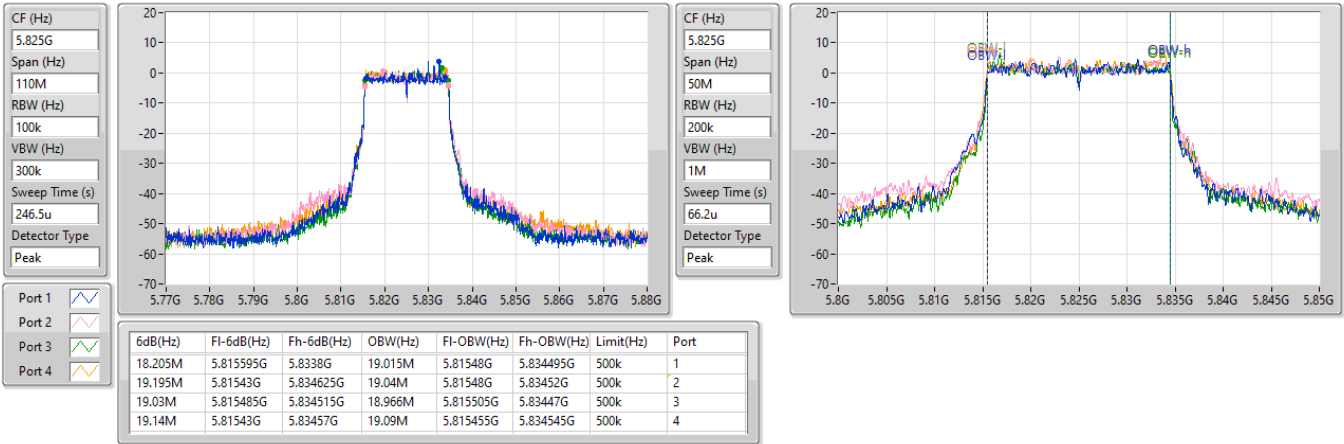


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW


5825MHz

13/06/2025

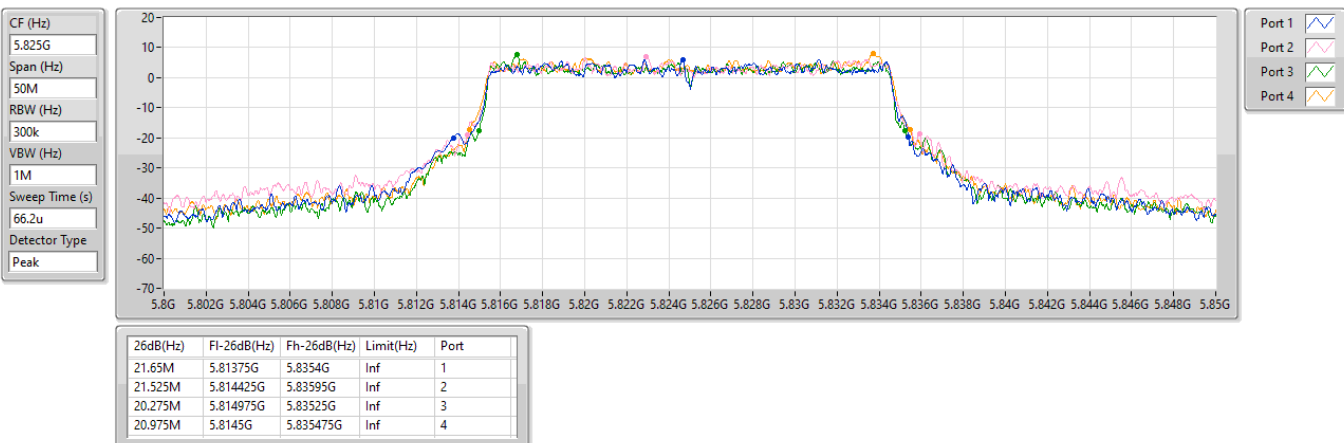


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5755MHz

13/06/2025

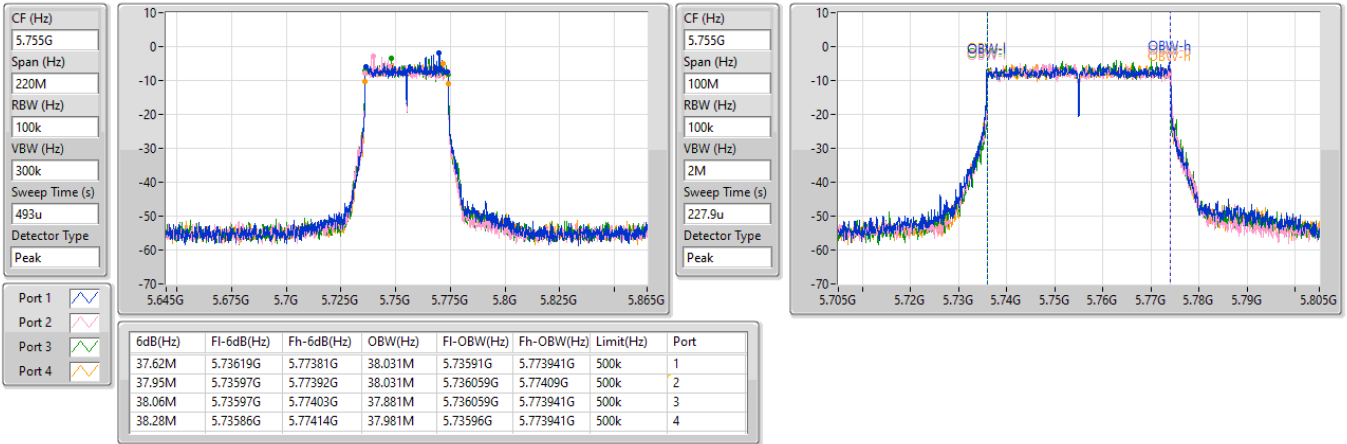
5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5755MHz

13/06/2025

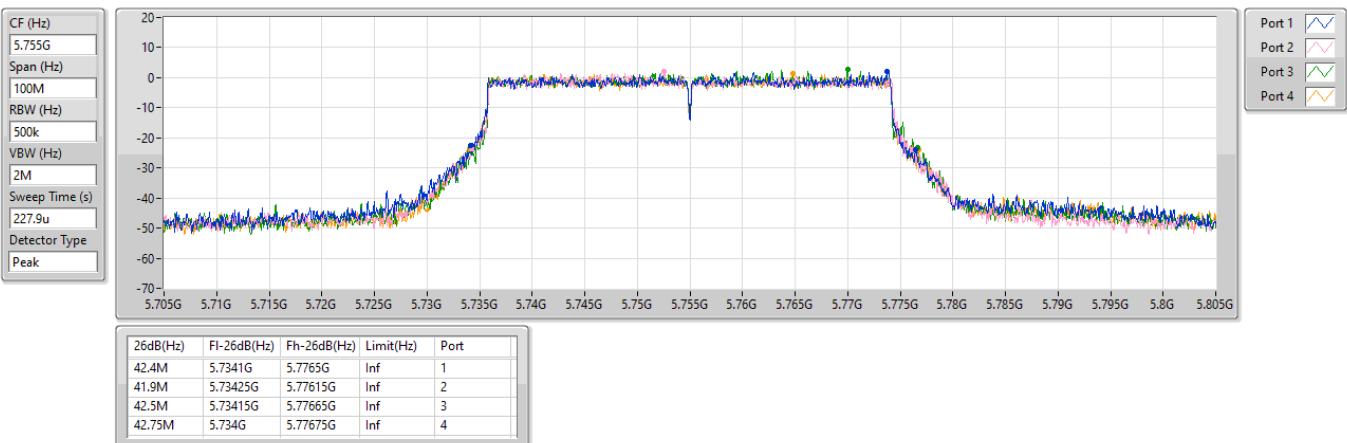


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5775MHz

13/06/2025

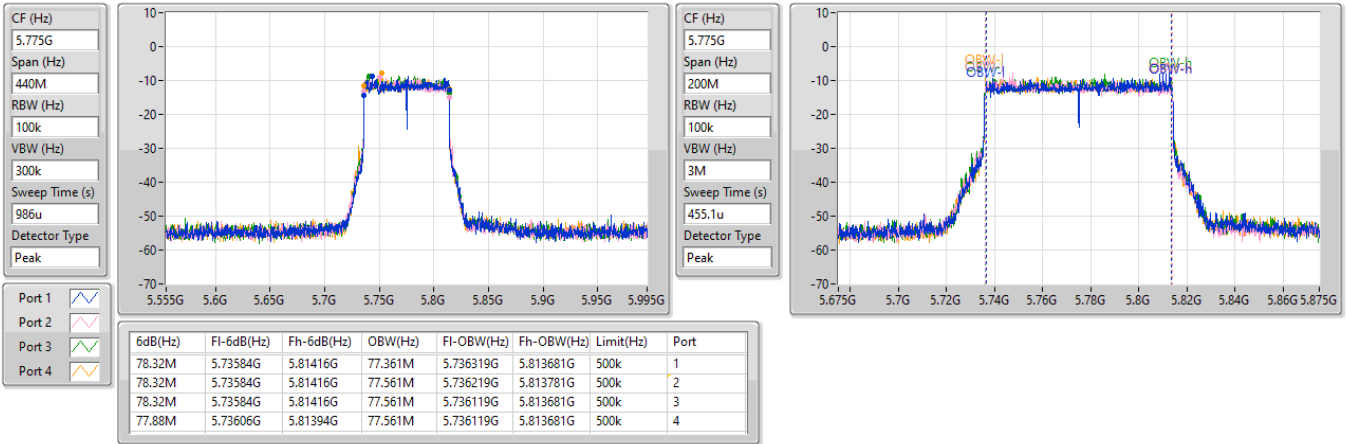


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5775MHz

13/06/2025

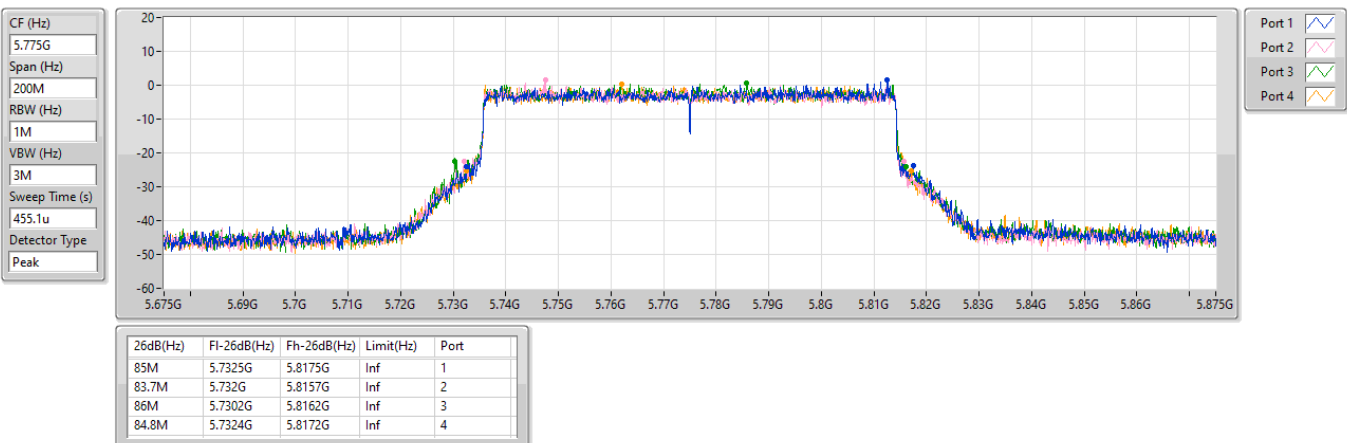

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	16.06M	18.229M	18M2D1D	13.915M	17.437M
802.11ax HEW20_Nss1,(MCS0)_1TX	18.975M	19.14M	19M1D1D	13.09M	19.015M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5745MHz	Pass	500k	16.06M	17.437M
5785MHz	Pass	500k	15.675M	18.229M
5825MHz	Pass	500k	13.915M	17.745M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5745MHz	Pass	500k	18.535M	19.015M
5785MHz	Pass	500k	13.09M	19.14M
5825MHz	Pass	500k	18.975M	19.065M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5745MHz

18/06/2025

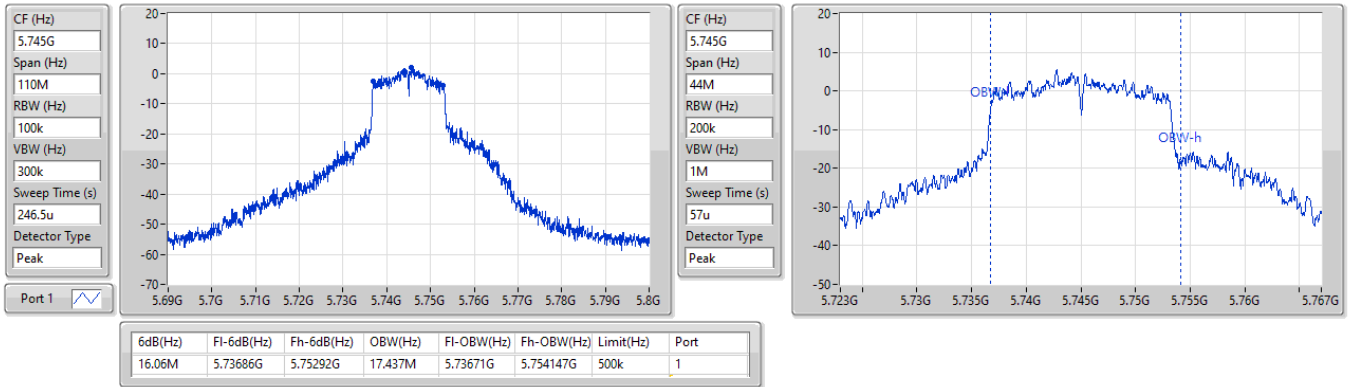


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5745MHz

18/06/2025


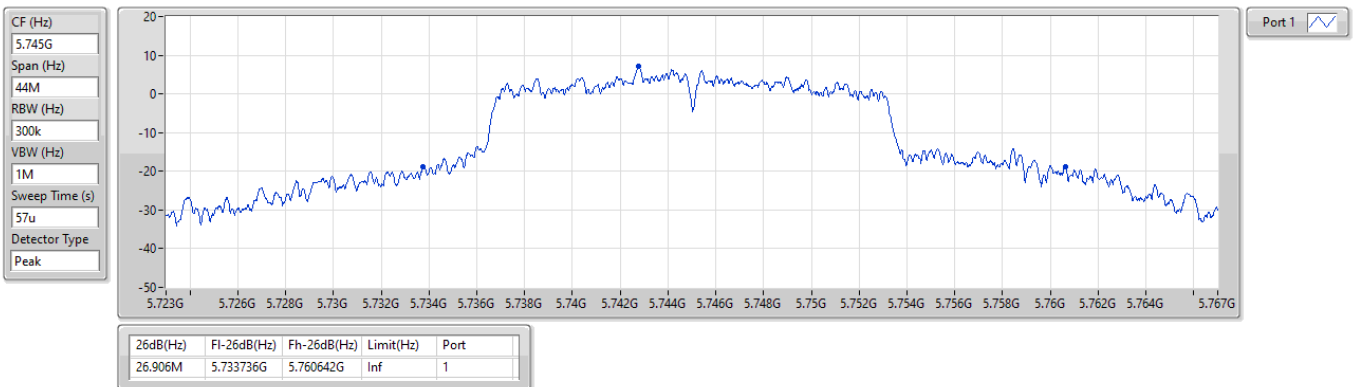


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5825MHz

18/06/2025

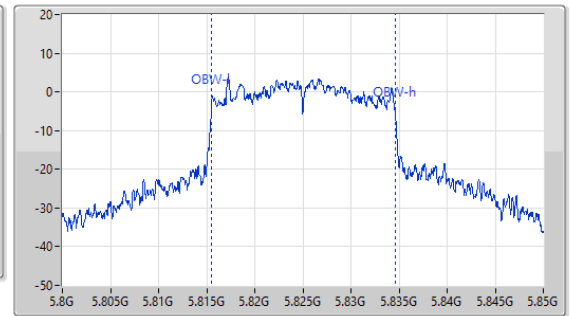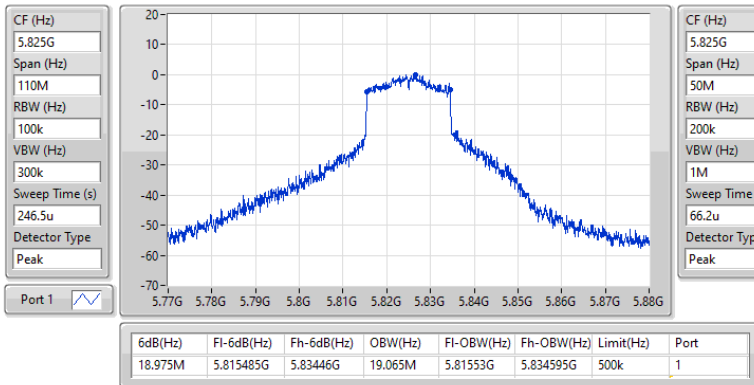


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5825MHz

18/06/2025

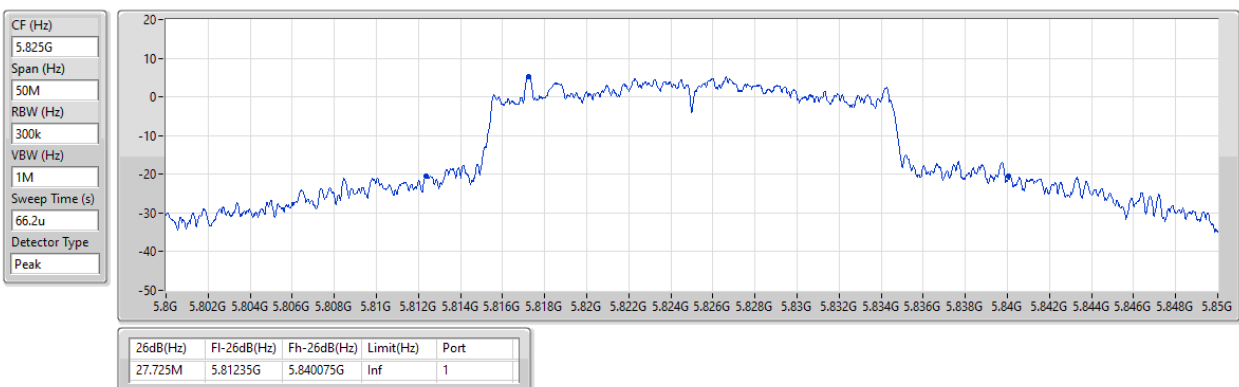

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	16.06M	18.229M	18M2D1D	13.915M	17.437M
802.11ax HEW20_Nss1,(MCS0)_1TX	18.975M	19.14M	19M1D1D	13.09M	19.015M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5745MHz	Pass	500k	16.06M	17.437M
5785MHz	Pass	500k	15.675M	18.229M
5825MHz	Pass	500k	13.915M	17.745M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5745MHz	Pass	500k	18.535M	19.015M
5785MHz	Pass	500k	13.09M	19.14M
5825MHz	Pass	500k	18.975M	19.065M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band


Port X-OBW = Port X 99% occupied bandwidth

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5745MHz

18/06/2025

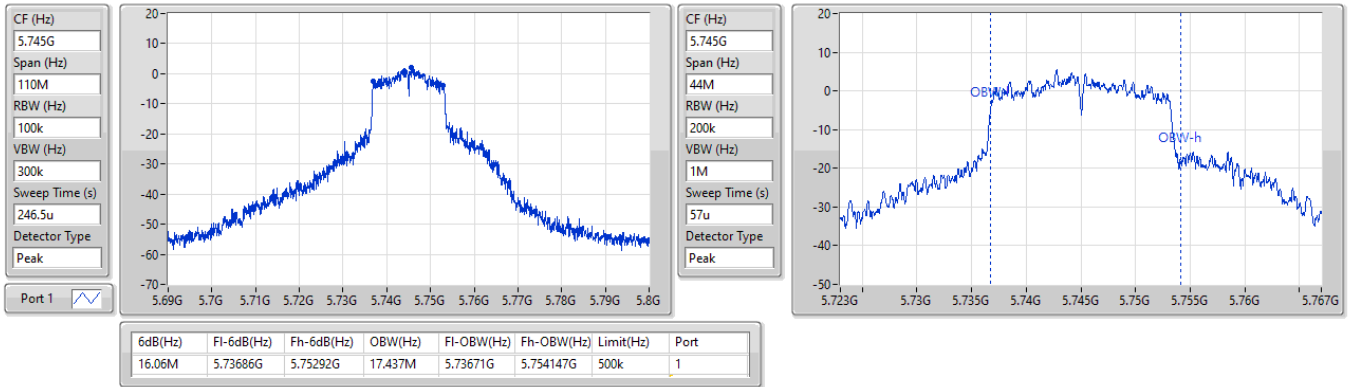


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5745MHz

18/06/2025


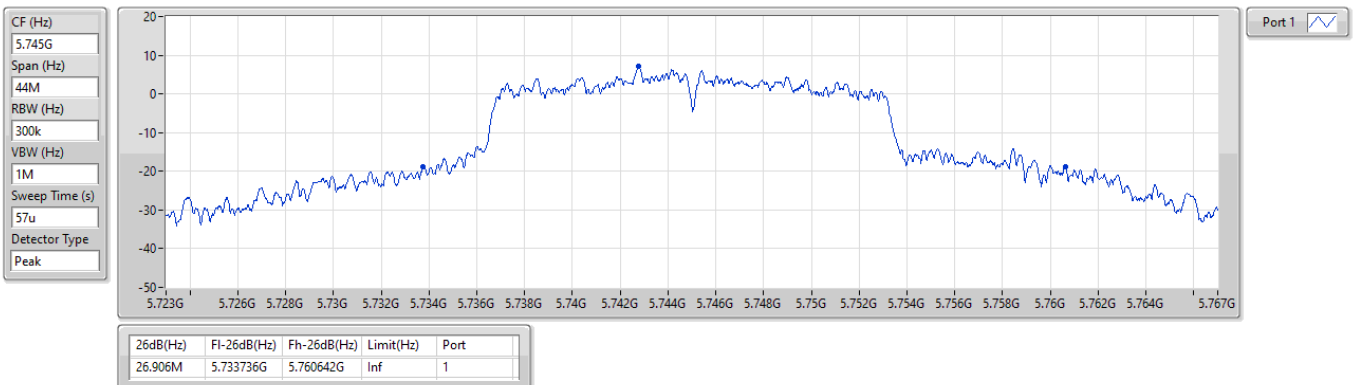


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5825MHz

18/06/2025

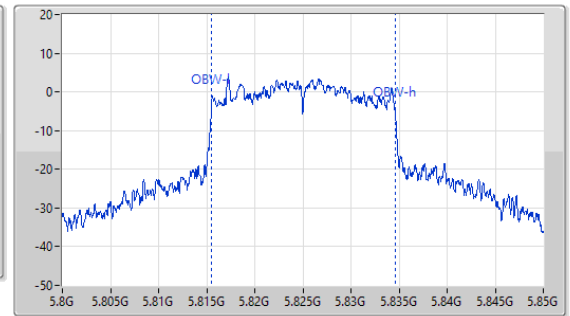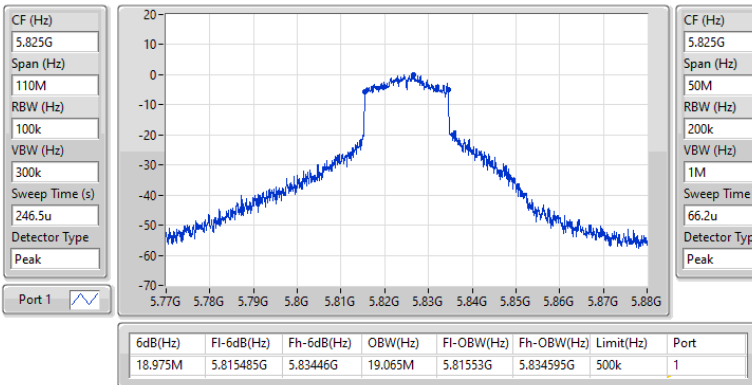


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5825MHz

18/06/2025

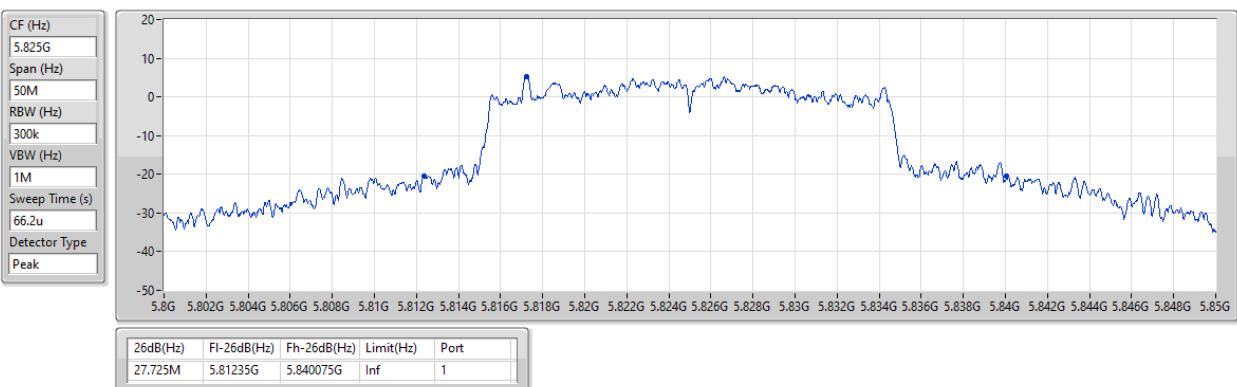



**Average Power_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Full RU**

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	18.34	0.06823
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	18.55	0.07161
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	18.39	0.06902
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	18.50	0.07079



**Average Power_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Full RU**

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 3 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	3.70	18.11	18.11	30.00
5785MHz	Pass	3.70	18.34	18.34	30.00
5825MHz	Pass	3.70	18.09	18.09	30.00
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	3.70	18.23	18.23	30.00
5785MHz	Pass	3.70	18.55	18.55	30.00
5825MHz	Pass	3.70	18.28	18.28	30.00
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5755MHz	Pass	3.70	18.15	18.15	30.00
5795MHz	Pass	3.70	18.39	18.39	30.00
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	3.70	18.50	18.50	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 2_Downtilt Panel Omni_2T1S_Full RU**

Appendix C.2

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	21.23	0.13274
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	21.35	0.13646
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	21.20	0.13183
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	18.61	0.07261



Average Power_Non-Beamforming_ Radio 2_Downtilt Panel Omni_2T1S_Full RU

Appendix C.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 3 (dBm)	Total Power (dBm)	ssPower Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	3.70	18.08	18.23	21.17	30.00
5785MHz	Pass	3.70	18.00	18.43	21.23	30.00
5825MHz	Pass	3.70	17.65	18.19	20.94	30.00
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	3.70	18.29	18.23	21.27	30.00
5785MHz	Pass	3.70	18.11	18.55	21.35	30.00
5825MHz	Pass	3.70	17.76	18.29	21.04	30.00
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5755MHz	Pass	3.70	17.99	18.08	21.05	30.00
5795MHz	Pass	3.70	18.01	18.37	21.20	30.00
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	3.70	15.39	15.80	18.61	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**Average Power_Non-Beamforming_
Radio 2_Downtilt Panel Omni_4T1S_Full RU**

Appendix C.3

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	24.18	0.26182
802.11be EHT20_Nss1,(MCS0)_4TX	24.26	0.26669
802.11be EHT40_Nss1,(MCS0)_4TX	24.13	0.25882
802.11be EHT80_Nss1,(MCS0)_4TX	23.03	0.20091



Average Power_Non-Beamforming_ Radio 2_Downtilt Panel Omni_4T1S_Full RU

Appendix C.3

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	3.70	17.95	18.59	18.02	18.05	24.18	30.00
5785MHz	Pass	3.70	17.74	17.65	18.20	17.70	23.85	30.00
5825MHz	Pass	3.70	17.49	17.63	17.87	18.05	23.79	30.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	3.70	18.02	18.67	18.13	18.10	24.26	30.00
5785MHz	Pass	3.70	17.95	17.74	18.32	17.88	24.00	30.00
5825MHz	Pass	3.70	17.57	17.77	18.14	18.10	23.92	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5755MHz	Pass	3.70	17.93	18.10	18.10	18.29	24.13	30.00
5795MHz	Pass	3.70	17.78	17.72	18.21	17.99	23.95	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	3.70	16.88	16.78	17.37	16.99	23.03	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power_Non-Beamforming_ Radio 2_Patch Array_1T1S_Full RU

Appendix C.4

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	18.34	0.06823
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	18.55	0.07161
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	18.39	0.06902
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	18.50	0.07079



Average Power_Non-Beamforming_ Radio 2_Patch Array_1T1S_Full RU

Appendix C.4

Result

Mode	Result	DG (dBi)	Port 3 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	13.00	18.11	18.11	23.00
5785MHz	Pass	13.00	18.34	18.34	23.00
5825MHz	Pass	13.00	18.09	18.09	23.00
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	13.00	18.23	18.23	23.00
5785MHz	Pass	13.00	18.55	18.55	23.00
5825MHz	Pass	13.00	18.28	18.28	23.00
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5755MHz	Pass	13.00	18.15	18.15	23.00
5795MHz	Pass	13.00	18.39	18.39	23.00
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	13.00	18.50	18.50	23.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power_Non-Beamforming_ Radio 2_Patch Array_2T1S_Full RU

Appendix C.5

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	21.23	0.13274
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	21.35	0.13646
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	21.20	0.13183
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	16.93	0.04932



Average Power_Non-Beamforming_ Radio 2_Patch Array_2T1S_Full RU

Appendix C.5

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 3 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	13.00	18.08	18.23	21.17	23.00
5785MHz	Pass	13.00	18.00	18.43	21.23	23.00
5825MHz	Pass	13.00	17.65	18.19	20.94	23.00
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	13.00	18.29	18.23	21.27	23.00
5785MHz	Pass	13.00	18.11	18.55	21.35	23.00
5825MHz	Pass	13.00	17.76	18.29	21.04	23.00
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5755MHz	Pass	13.00	17.00	16.86	19.94	23.00
5795MHz	Pass	13.00	18.01	18.37	21.20	23.00
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	13.00	13.74	14.09	16.93	23.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power_Non-Beamforming_ Radio 2_Patch Array_4T1S_Full RU

Appendix C.6

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	22.47	0.17660
802.11be EHT20_Nss1,(MCS0)_4TX	22.28	0.16904
802.11be EHT40_Nss1,(MCS0)_4TX	20.67	0.11668
802.11be EHT80_Nss1,(MCS0)_4TX	18.17	0.06561



Average Power_Non-Beamforming_ Radio 2_Patch Array_4T1S_Full RU

Appendix C.6

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	13.00	15.98	17.34	16.02	16.32	22.47	23.00
5785MHz	Pass	13.00	15.87	15.98	16.27	16.13	22.09	23.00
5825MHz	Pass	13.00	15.98	16.44	16.48	16.84	22.47	23.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	13.00	15.80	16.38	15.76	16.03	22.02	23.00
5785MHz	Pass	13.00	16.06	16.19	16.47	16.32	22.28	23.00
5825MHz	Pass	13.00	15.81	16.18	16.20	16.55	22.21	23.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5755MHz	Pass	13.00	13.45	13.29	13.53	13.45	19.45	23.00
5795MHz	Pass	13.00	14.54	14.71	14.73	14.61	20.67	23.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	13.00	12.04	12.08	12.39	12.06	18.17	23.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power_Non-Beamforming_ Scan Radio_Downtilt Panel Omni

Appendix C.7

Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	15.11	0.03243
802.11ax HEW20_Nss1,(MCS0)_1TX	14.87	0.03069



Average Power_Non-Beamforming_ Scan Radio_Downtilt Panel Omni

Appendix C.7

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5745MHz	Pass	3.70	15.02	15.02	30.00
5785MHz	Pass	3.70	15.11	15.11	30.00
5825MHz	Pass	3.70	15.03	15.03	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5745MHz	Pass	3.70	14.78	14.78	30.00
5785MHz	Pass	3.70	14.87	14.87	30.00
5825MHz	Pass	3.70	14.80	14.80	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	15.11	0.03243
802.11ax HEW20_Nss1,(MCS0)_1TX	14.87	0.03069

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5745MHz	Pass	13.00	15.02	15.02	23.00
5785MHz	Pass	13.00	15.11	15.11	23.00
5825MHz	Pass	13.00	15.03	15.03	23.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5745MHz	Pass	13.00	14.78	14.78	23.00
5785MHz	Pass	13.00	14.87	14.87	23.00
5825MHz	Pass	13.00	14.80	14.80	23.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	24.26	0.26669
802.11be EHT40-BF_Nss1,(MCS0)_4TX	24.13	0.25882
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.03	0.20091

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	9.72	18.02	18.67	18.13	18.10	24.26	26.28
5785MHz	Pass	9.72	17.95	17.74	18.32	17.88	24.00	26.28
5825MHz	Pass	9.72	17.57	17.77	18.14	18.10	23.92	26.28
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5755MHz	Pass	9.72	17.93	18.10	18.10	18.29	24.13	26.28
5795MHz	Pass	9.72	17.78	17.72	18.21	17.99	23.95	26.28
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	9.72	16.88	16.78	17.37	16.99	23.03	26.28

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	16.40	0.04365
802.11be EHT40-BF_Nss1,(MCS0)_4TX	16.31	0.04276
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.04	0.04018

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	19.02	10.16	10.77	10.12	10.42	16.40	16.98
5785MHz	Pass	19.02	9.92	10.04	10.37	10.17	16.15	16.98
5825MHz	Pass	19.02	9.70	10.07	10.10	10.45	16.11	16.98
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5755MHz	Pass	19.02	10.30	10.15	10.39	10.33	16.31	16.98
5795MHz	Pass	19.02	9.92	10.10	10.09	9.96	16.04	16.98
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	19.02	9.90	9.97	10.24	9.96	16.04	16.98

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Full RU**

Appendix D.1

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	4.22
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	3.78
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	0.48
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-2.53

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Full RU**

Appendix D.1

Result

Mode	Result	DG (dBi)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	3.70	4.06	4.06	30.00
5785MHz	Pass	3.70	4.22	4.22	30.00
5825MHz	Pass	3.70	3.82	3.82	30.00
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	3.70	3.42	3.42	30.00
5785MHz	Pass	3.70	3.78	3.78	30.00
5825MHz	Pass	3.70	3.30	3.30	30.00
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5755MHz	Pass	3.70	0.22	0.22	30.00
5795MHz	Pass	3.70	0.48	0.48	30.00
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	3.70	-2.53	-2.53	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.




5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

PSD

5785MHz

16/06/2025

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
19.939
Detector Type
RMS

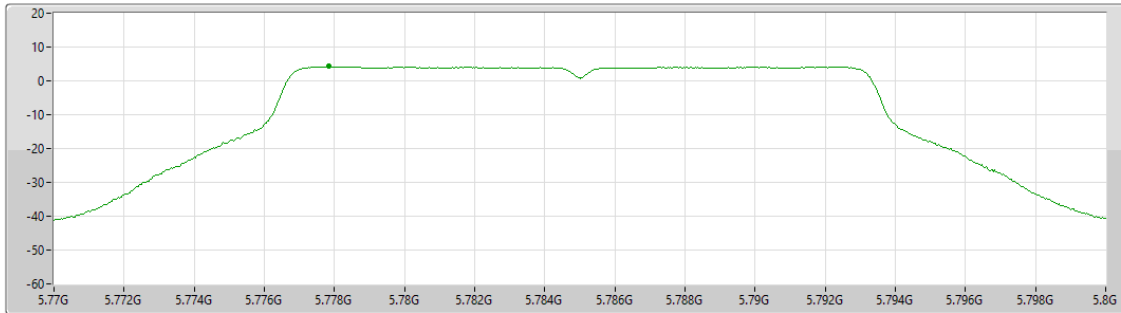

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.22	4.22	-	-	4.22


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

PSD

5785MHz

16/06/2025

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

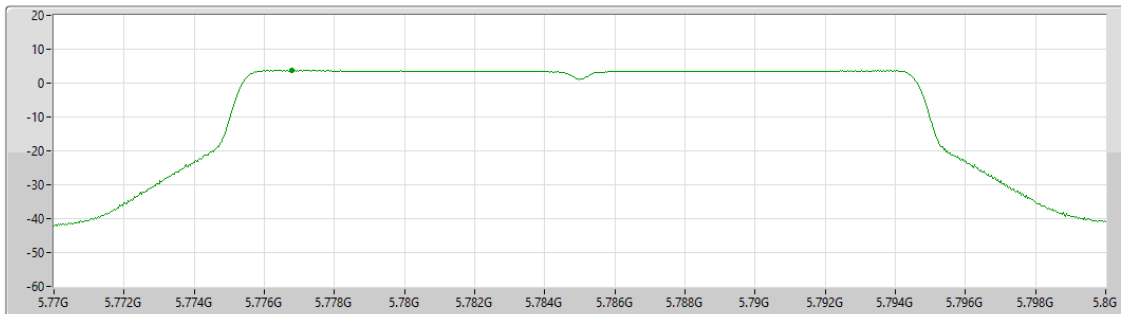

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.78	3.78	-	-	3.78

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

PSD

5795MHz

16/06/2025

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

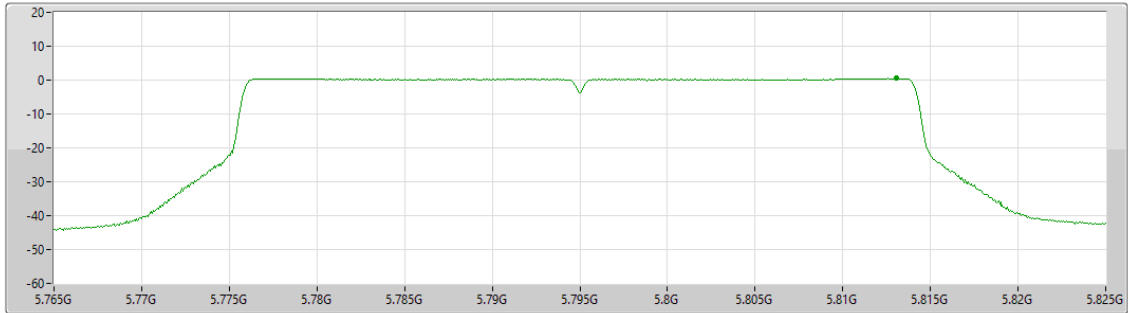

Port 3 

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.48	0.48	-	-	0.48

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

PSD

5775MHz

16/06/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

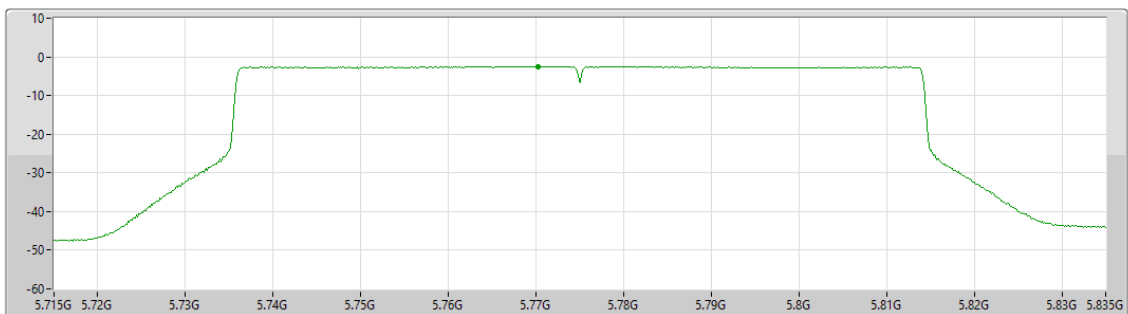

Port 3 

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.53	-2.53	-	-	-2.53



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_2T1S_Full RU**

Appendix D.2

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	6.90
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	6.35
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	3.10
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-2.90

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_2T1S_Full RU**

Appendix D.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	6.71	3.74	3.87	6.80	29.29
5785MHz	Pass	6.71	3.64	4.18	6.90	29.29
5825MHz	Pass	6.71	3.43	3.91	6.58	29.29
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	6.71	3.30	3.30	6.28	29.29
5785MHz	Pass	6.71	3.21	3.58	6.35	29.29
5825MHz	Pass	6.71	2.92	3.34	6.07	29.29
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5755MHz	Pass	6.71	0.11	0.08	3.08	29.29
5795MHz	Pass	6.71	-0.09	0.30	3.10	29.29
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	6.71	-5.94	-5.69	-2.90	29.29

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

PSD

5785MHz

14/06/2025

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
19.94
Detector Type
RMS

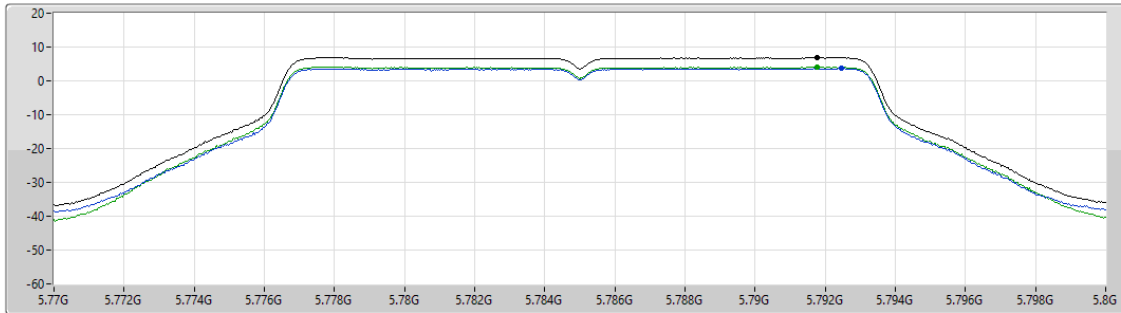

Sum
Port 1
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.90	6.90	3.64	-	4.18


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

PSD

5785MHz

14/06/2025

CF (Hz)
5.785G
Span (Hz)
30M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.745
Detector Type
RMS

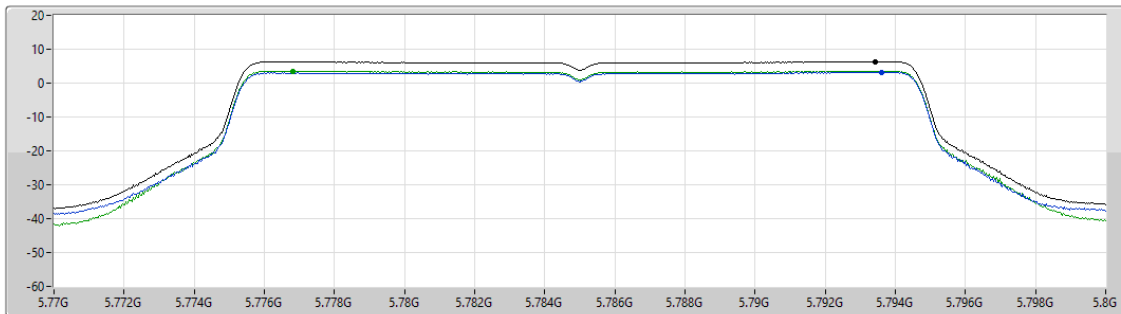

Sum
Port 1
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.35	6.35	3.21	-	3.58

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

PSD

5795MHz

14/06/2025

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

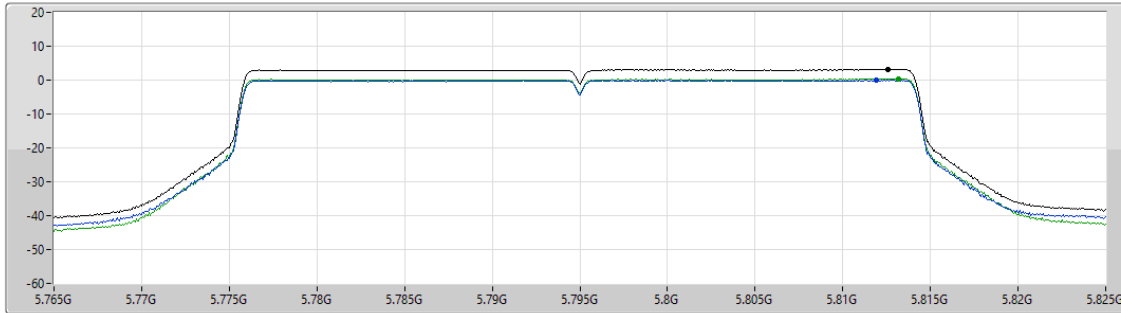

Sum ☒

Port 1 ☒

Port 3 ☒

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.10	3.10	-0.09	-	0.30

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

PSD

5775MHz

17/06/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

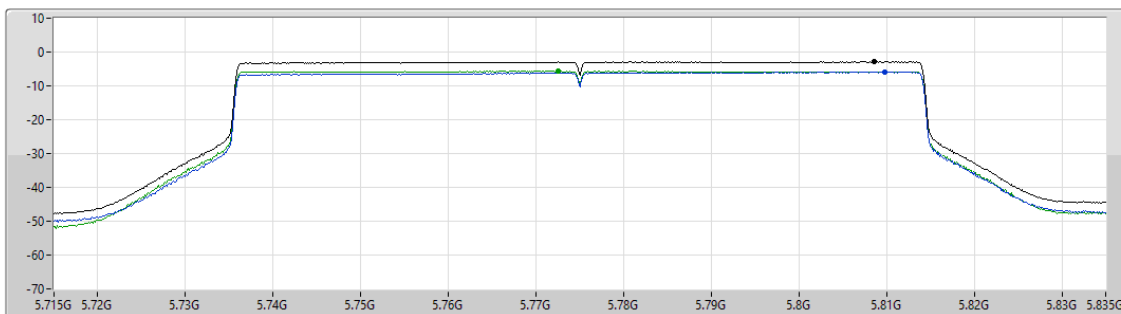

Sum ☒

Port 1 ☒

Port 3 ☒

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.90	-2.90	-5.94	-	-5.69



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_4T1S_Full RU**

Appendix D.3

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_4TX	9.90
802.11be EHT20_Nss1,(MCS0)_4TX	9.25
802.11be EHT40_Nss1,(MCS0)_4TX	5.98
802.11be EHT80_Nss1,(MCS0)_4TX	1.64

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_4T1S_Full RU**

Appendix D.3

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	9.72	3.74	4.59	3.87	3.80	9.90	26.28
5785MHz	Pass	9.72	3.46	3.54	3.98	3.52	9.55	26.28
5825MHz	Pass	9.72	3.19	3.58	3.76	3.83	9.55	26.28
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	9.72	3.15	3.96	3.16	3.14	9.25	26.28
5785MHz	Pass	9.72	3.06	3.02	3.35	2.90	9.00	26.28
5825MHz	Pass	9.72	2.59	3.06	3.17	3.14	8.90	26.28
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5755MHz	Pass	9.72	0.01	0.17	0.05	0.21	5.98	26.28
5795MHz	Pass	9.72	-0.23	-0.24	0.25	-0.06	5.87	26.28
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	9.72	-4.27	-4.14	-3.86	-4.34	1.64	26.28

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;


Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5745MHz

17/06/2025

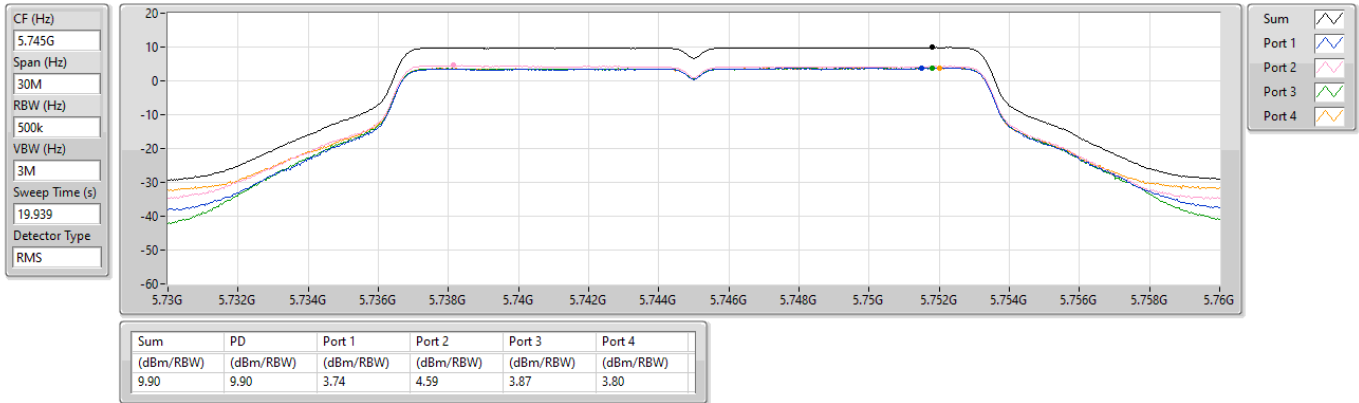


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5745MHz

17/06/2025

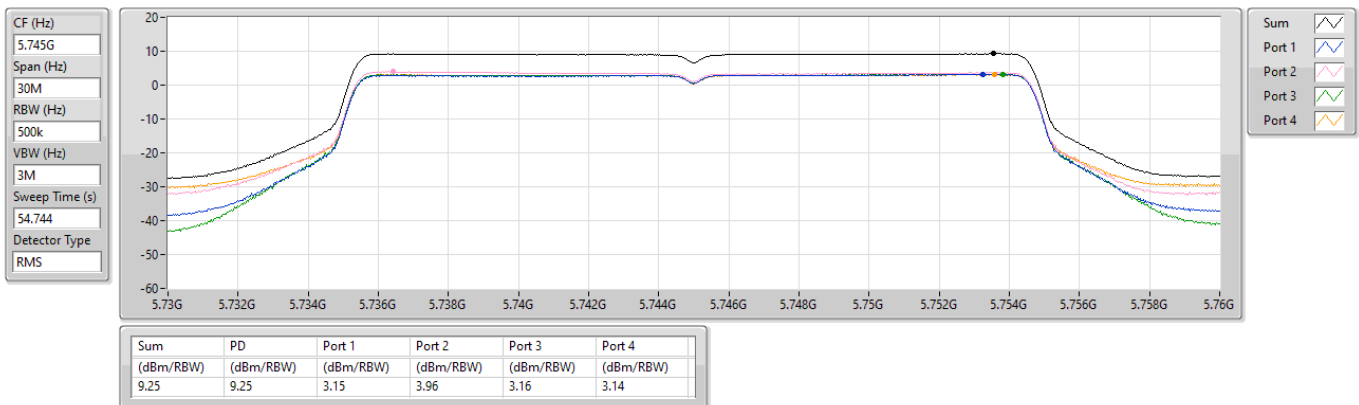


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5755MHz

17/06/2025

CF (Hz)
5.755G
Span (Hz)
60M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

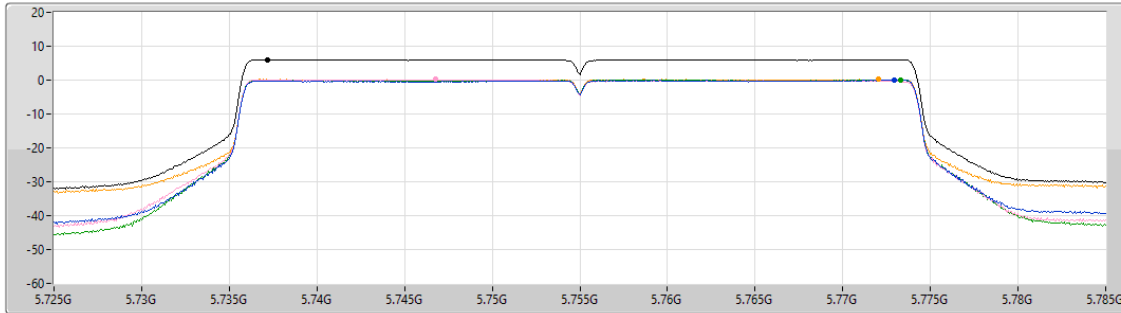

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.98	5.98	0.01	0.17	0.05	0.21


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5775MHz

17/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

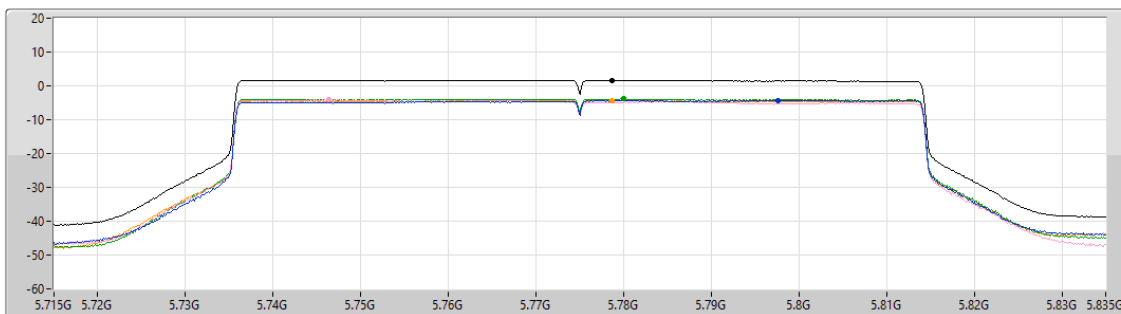

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.64	1.64	-4.27	-4.14	-3.86	-4.34



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	4.22
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	3.78
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	0.48
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-2.53

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

**Result**

Mode	Result	DG (dBi)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	13.00	4.06	4.06	23.00
5785MHz	Pass	13.00	4.22	4.22	23.00
5825MHz	Pass	13.00	3.82	3.82	23.00
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5745MHz	Pass	13.00	3.42	3.42	23.00
5785MHz	Pass	13.00	3.78	3.78	23.00
5825MHz	Pass	13.00	3.30	3.30	23.00
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5755MHz	Pass	13.00	0.22	0.22	23.00
5795MHz	Pass	13.00	0.48	0.48	23.00
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	13.00	-2.53	-2.53	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

PSD

5785MHz

16/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.939

Detector Type
RMS

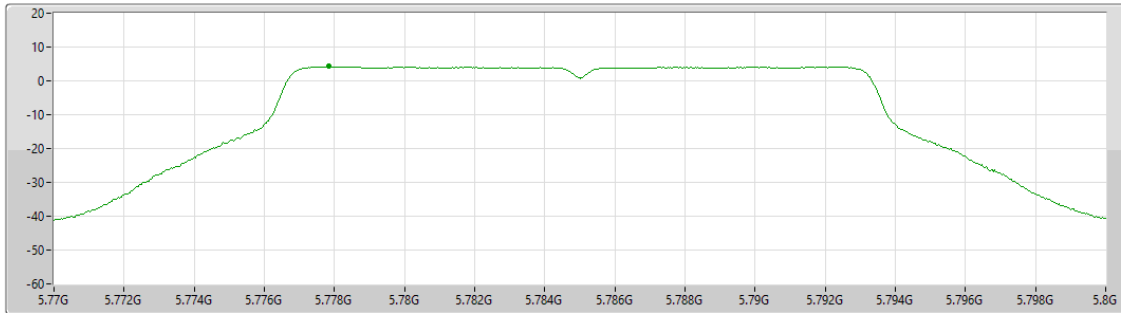

Sum	PD	Port 1	Port 2	Port 3
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
4.22	4.22	-	-	4.22

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

PSD

5785MHz

16/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

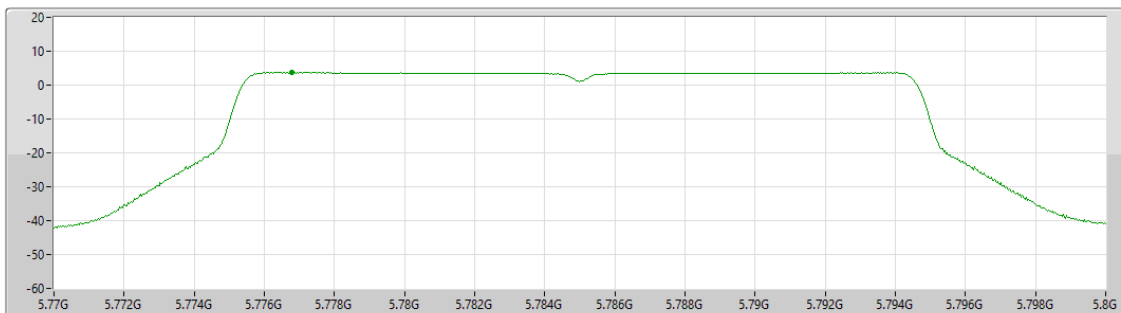

Sum	PD	Port 1	Port 2	Port 3
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
3.78	3.78	-	-	3.78

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

PSD

5795MHz

16/06/2025

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

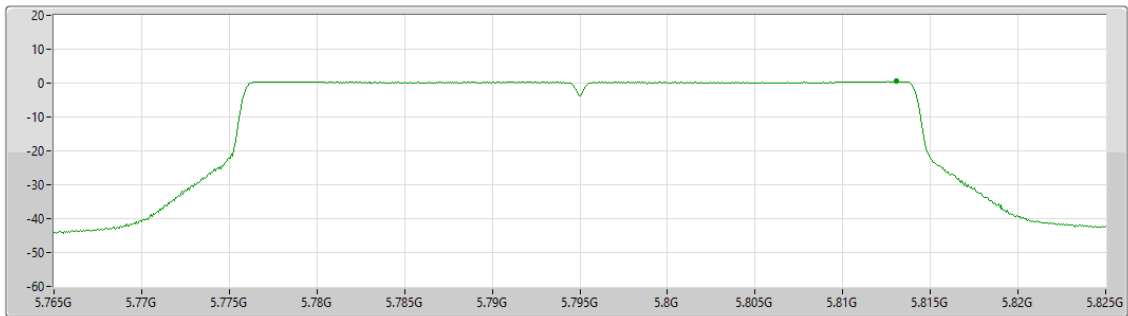

Port 3 

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.48	0.48	-	-	0.48

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

PSD

5775MHz

16/06/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

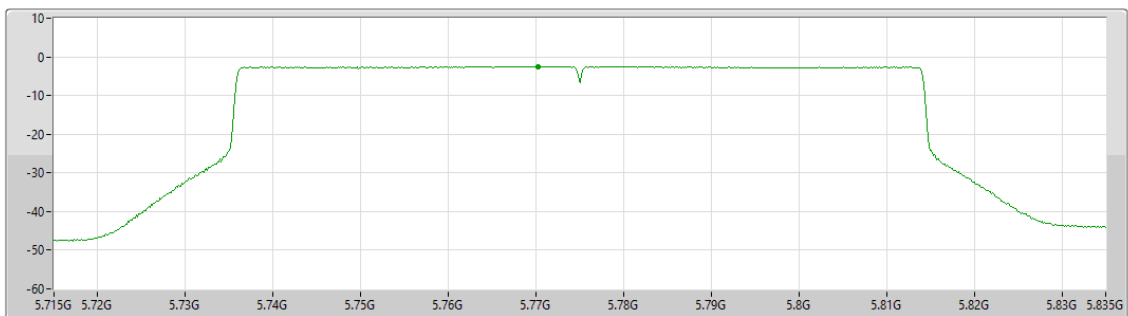

Port 3 

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.53	-2.53	-	-	-2.53



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	6.90
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	6.35
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	3.10
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-5.05

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Patch Array_2T1S_Full RU**

Appendix D.5

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	16.01	3.74	3.87	6.80	19.99
5785MHz	Pass	16.01	3.64	4.18	6.90	19.99
5825MHz	Pass	16.01	3.43	3.91	6.58	19.99
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5745MHz	Pass	16.01	3.30	3.30	6.28	19.99
5785MHz	Pass	16.01	3.21	3.58	6.35	19.99
5825MHz	Pass	16.01	2.92	3.34	6.07	19.99
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5755MHz	Pass	16.01	-1.34	-1.58	1.54	19.99
5795MHz	Pass	16.01	-0.09	0.30	3.10	19.99
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	16.01	-8.08	-7.87	-5.05	19.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

PSD

5785MHz

14/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.94

Detector Type
RMS

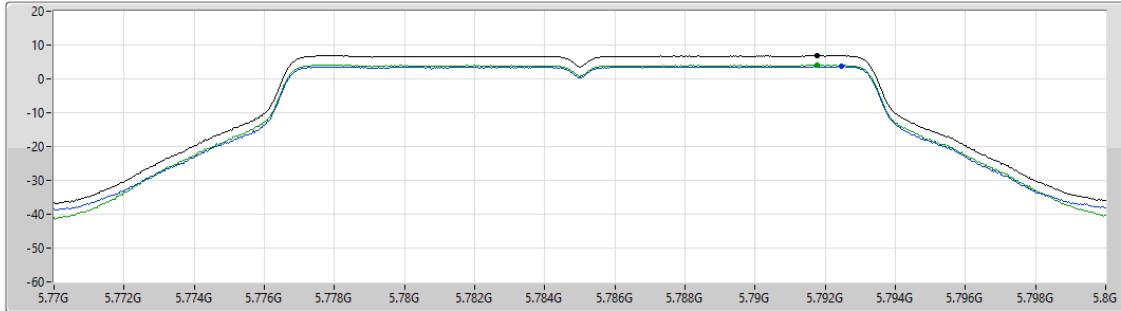

Sum ☒

Port 1 ☒

Port 3 ☒

Sum	PD	Port 1	Port 2	Port 3
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.90	6.90	3.64	-	4.18

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

PSD

5785MHz

14/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

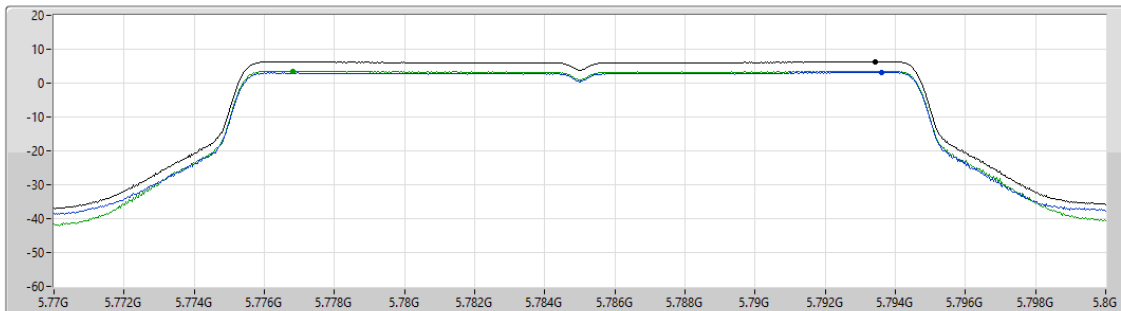

Sum ☒

Port 1 ☒

Port 3 ☒

Sum	PD	Port 1	Port 2	Port 3
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.35	6.35	3.21	-	3.58

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

PSD

5795MHz

14/06/2025

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

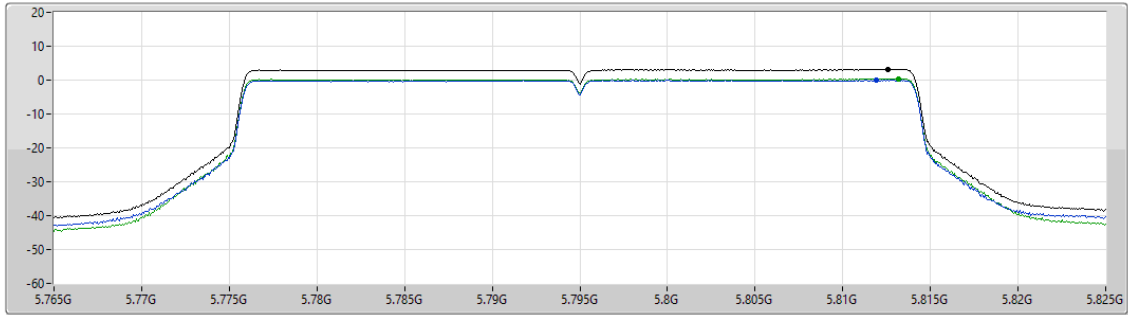

Sum ☒

Port 1 ☐

Port 3 ☐

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.10	3.10	-0.09	-	0.30

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

PSD

5775MHz

14/06/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

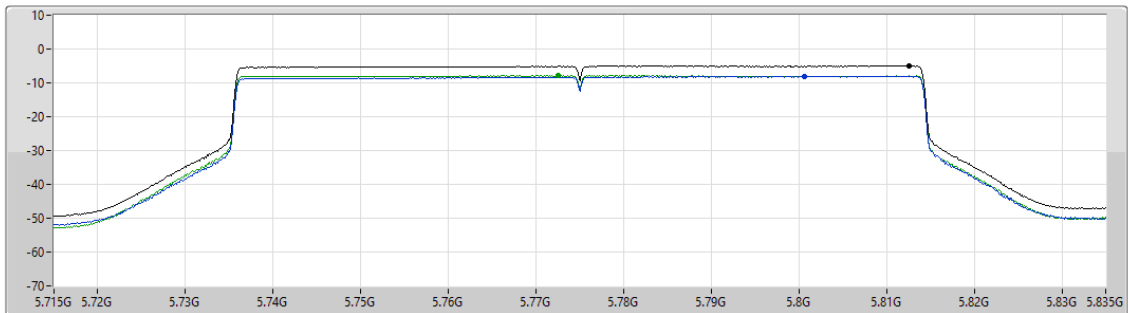

Sum ☒

Port 1 ☐

Port 3 ☐

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.05	-5.05	-8.08	-	-7.87



PSD_Non-Beamforming_ Radio 2_Patch Array_4T1S_Full RU

Appendix D.6

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_4TX	7.98
802.11be EHT20_Nss1,(MCS0)_4TX	7.01
802.11be EHT40_Nss1,(MCS0)_4TX	2.14
802.11be EHT80_Nss1,(MCS0)_4TX	-3.87

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Patch Array_4T1S_Full RU**

Appendix D.6

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	19.02	1.56	3.12	1.53	1.97	7.98	16.98
5785MHz	Pass	19.02	1.39	1.83	1.75	1.62	7.56	16.98
5825MHz	Pass	19.02	1.42	2.05	2.18	2.35	7.94	16.98
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5745MHz	Pass	19.02	0.60	1.35	0.51	0.77	6.74	16.98
5785MHz	Pass	19.02	0.85	1.19	1.27	1.07	7.01	16.98
5825MHz	Pass	19.02	0.54	1.13	1.14	1.34	6.94	16.98
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5755MHz	Pass	19.02	-4.94	-5.24	-5.10	-5.21	0.74	16.98
5795MHz	Pass	19.02	-3.97	-3.69	-3.71	-3.89	2.14	16.98
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	19.02	-9.81	-9.37	-9.58	-9.96	-3.87	16.98


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5745MHz

13/06/2025

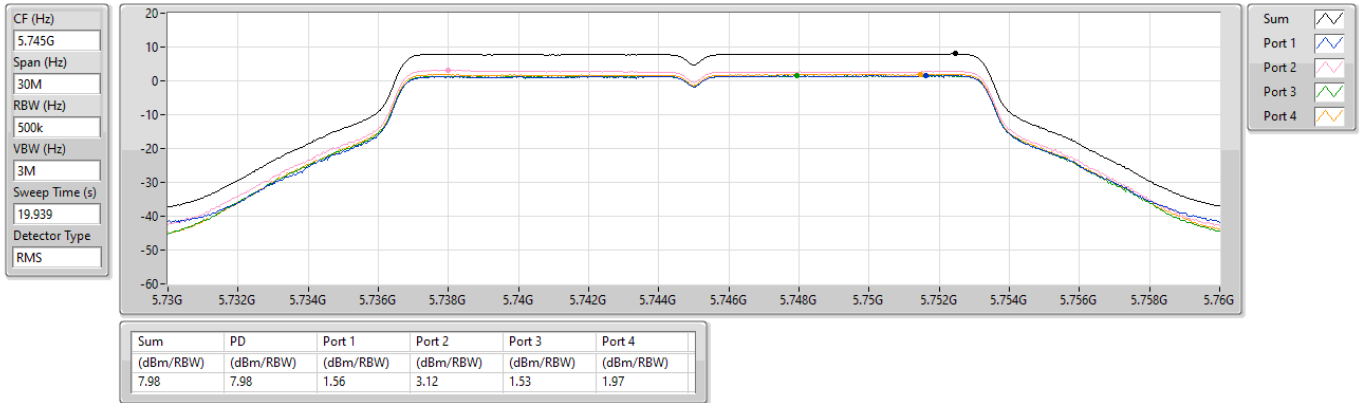


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5785MHz

13/06/2025

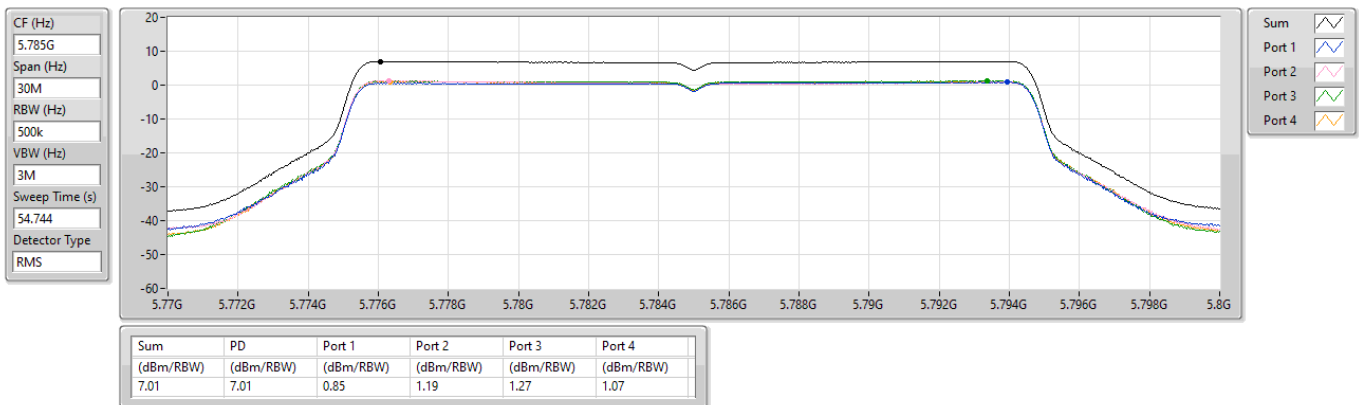

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5795MHz

13/06/2025

CF (Hz)
5.795G


Span (Hz)
60M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

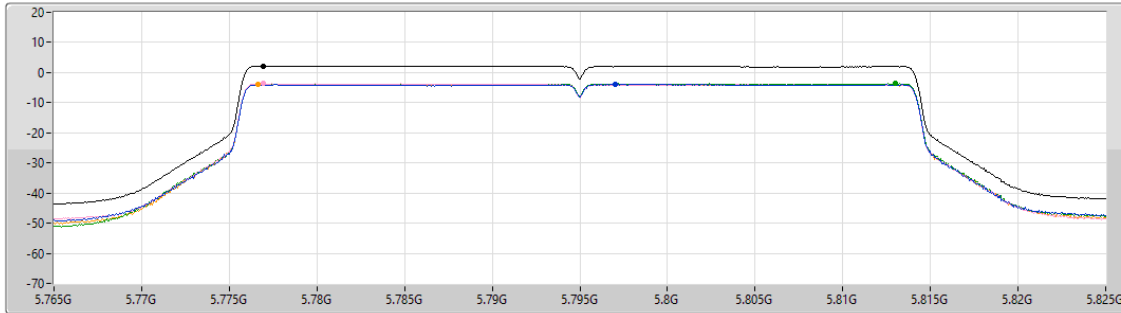

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.14	2.14	-3.97	-3.69	-3.71	-3.89

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5775MHz

13/06/2025

CF (Hz)
5.775G


Span (Hz)
120M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.744

Detector Type
RMS

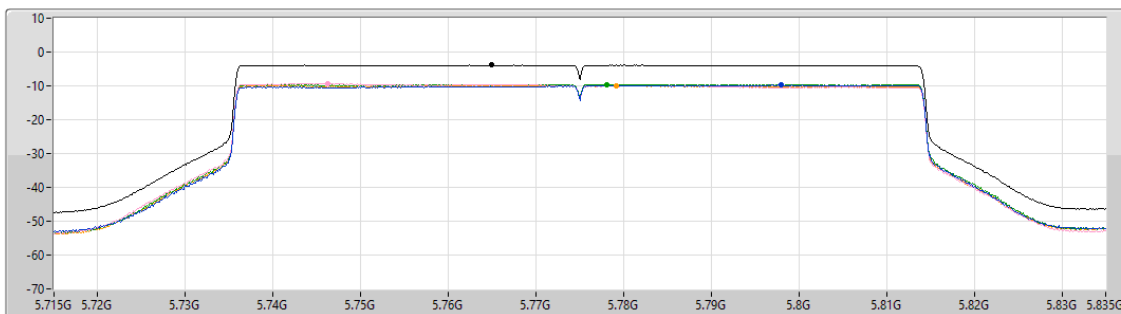

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.87	-3.87	-9.81	-9.37	-9.58	-9.96



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Multi-RU**

Appendix D.7

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	-3.02

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Multi-RU**

Appendix D.7

Result

Mode	Result	DG (dBi)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	3.70	-3.02	-3.02	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)

PSD

5775MHz

28/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
28.342
Detector Type
RMS

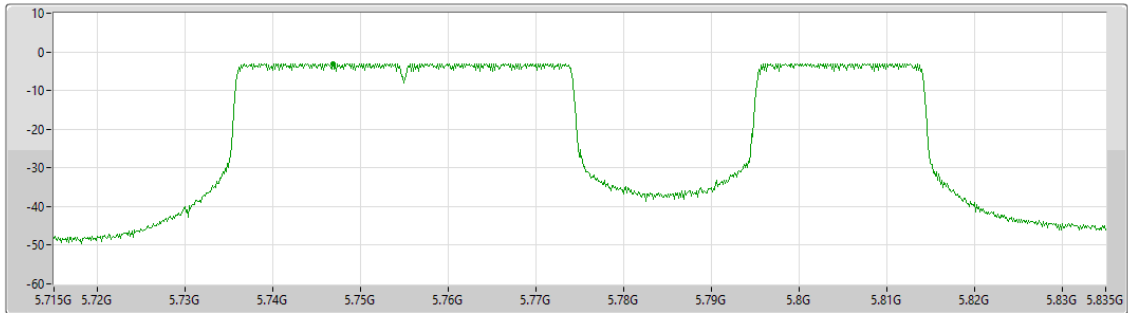

Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.02	-3.02	-	-	-3.02



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_2T1S_Multi-RU**

Appendix D.8

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	-2.97

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_2T1S_Multi-RU**

Appendix D.8

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	6.71	-6.02	-5.87	-2.97	29.29

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)

PSD

5775MHz

28/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
28.337
Detector Type
RMS

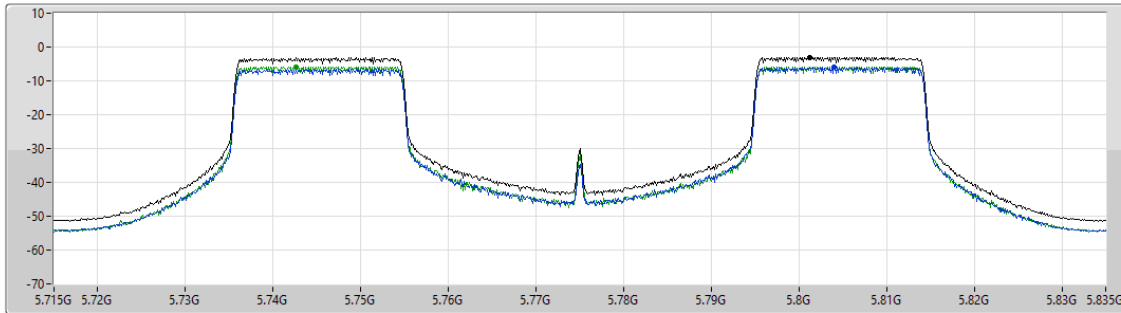

Sum
Port 1
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.97	-2.97	-6.02	-	-5.87



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_4T1S_Multi-RU**

Appendix D.9

Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	1.22

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_4T1S_Multi-RU**

Appendix D.9

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	9.72	-4.57	-4.40	-4.48	-4.87	1.22	26.28

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

PSD

5775MHz

27/06/2025

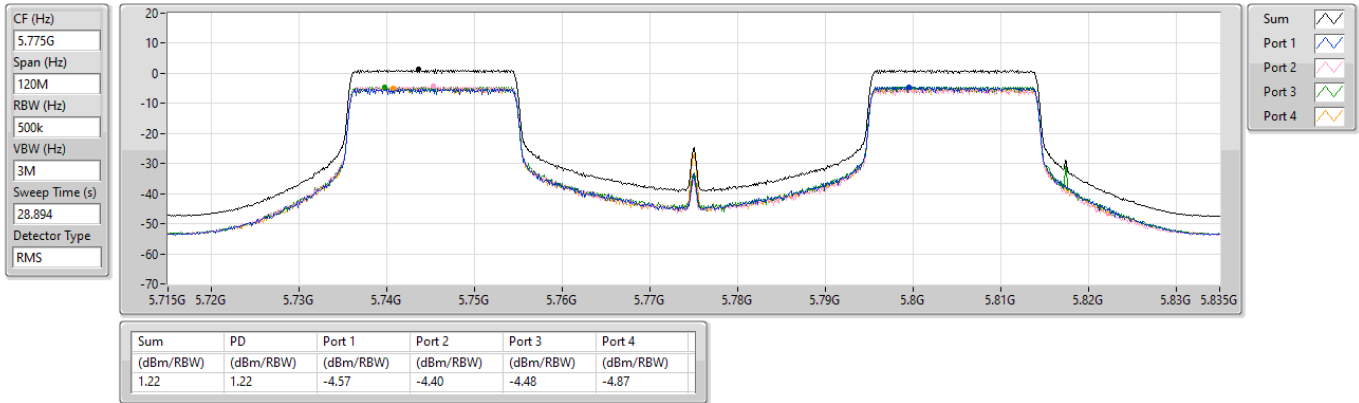



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	-4.01

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;




PSD_Non-Beamforming_Radio 2_Patch Array_1T1S_Multi-RU Appendix D.10

Result

Mode	Result	DG (dBi)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	13.00	-4.01	-4.01	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

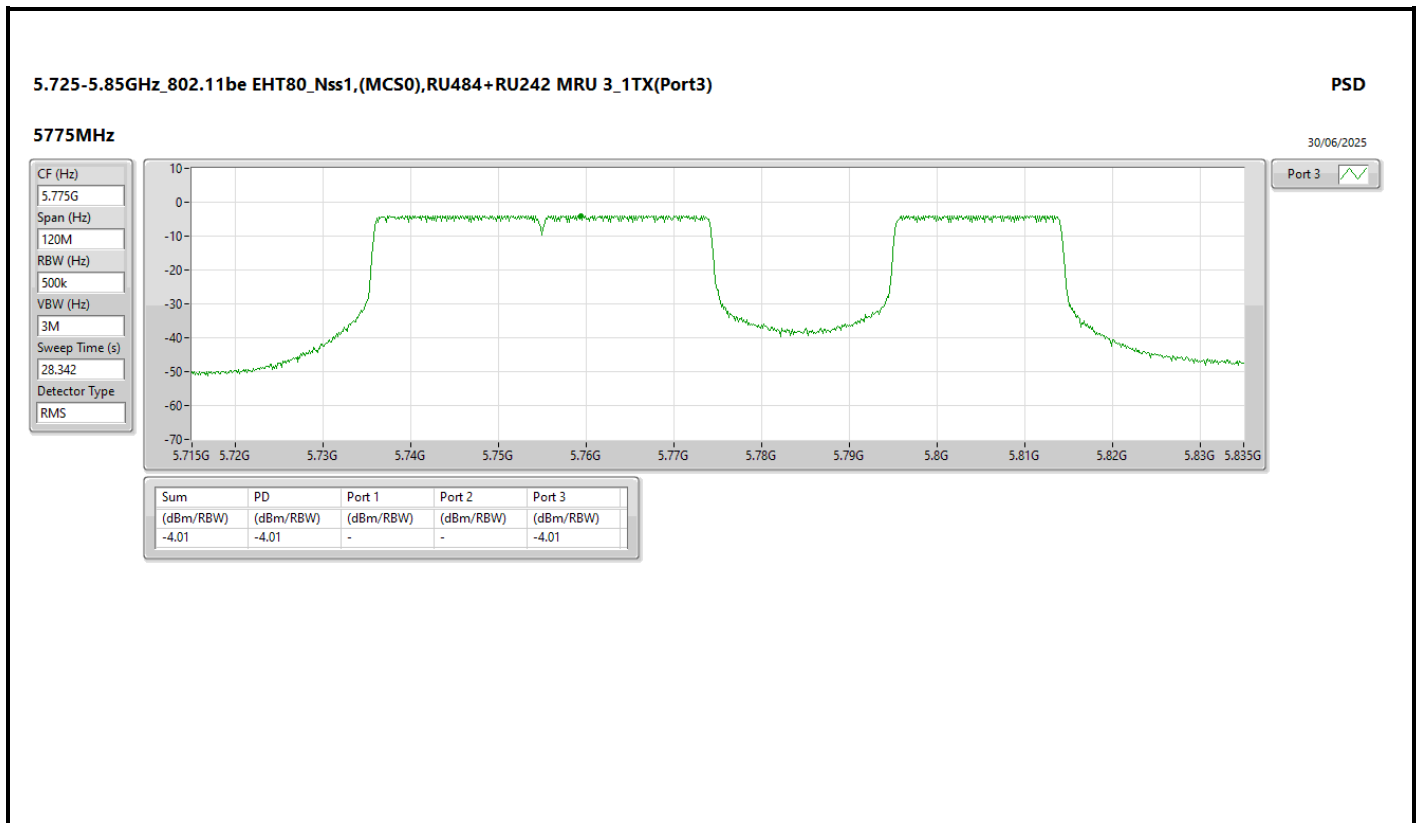



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	-5.13

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



PSD_Non-Beamforming_Radio 2_Patch Array_2T1S_Multi-RU Appendix D.11

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	16.01	-8.02	-8.09	-5.13	19.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX(Port1&Port3)

PSD

5775MHz

30/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
28.322
Detector Type
RMS

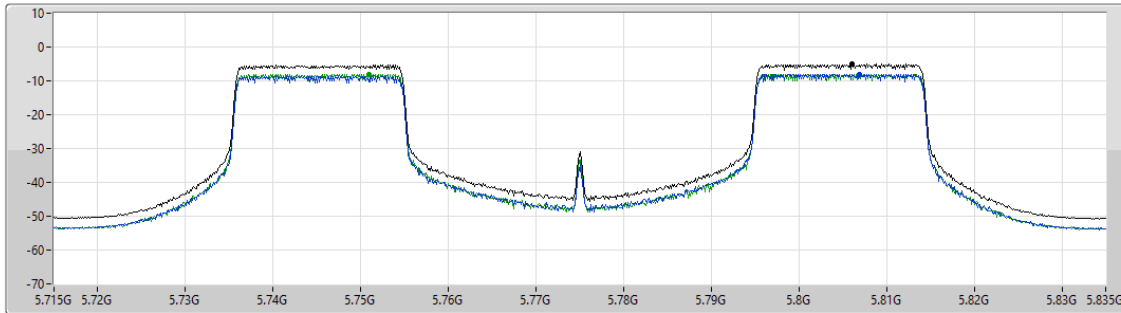

Sum
Port 1
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.13	-5.13	-8.02	-	-8.09



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-5.08

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



PSD_Non-Beamforming_Radio 2_Patch Array_4T1S_Multi-RU Appendix D.12

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	19.02	-10.79	-10.62	-10.86	-10.99	-5.08	16.98

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

PSD

5775MHz

30/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
1.68
Detector Type
RMS

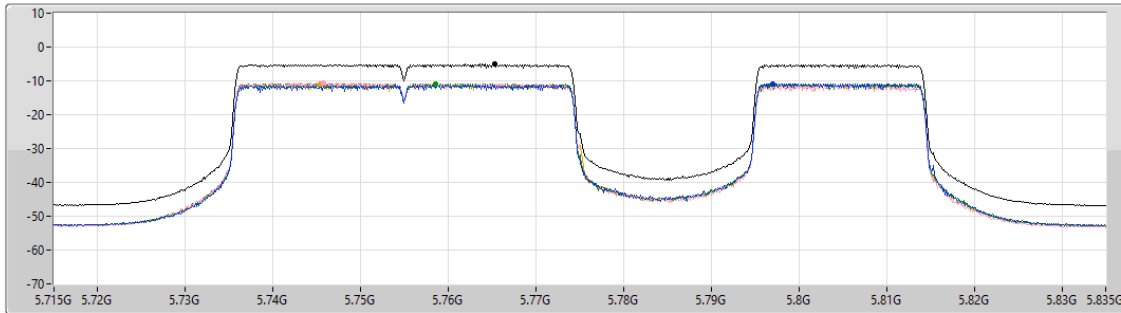

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.08	-5.08	-10.79	-10.62	-10.86	-10.99



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX(Port3)	-2.80

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_1T1S_Channel Puncturing**

Appendix D.13

Result

Mode	Result	DG (dBi)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	3.70	-2.80	-2.80	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX(Port3)

PSD

5775MHz

21/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.739
Detector Type
RMS

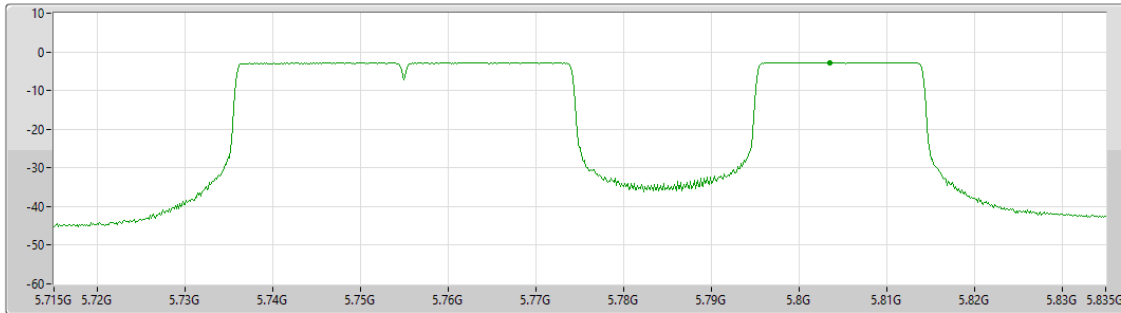

Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.80	-2.80	-	-	-2.80



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	-3.14

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_2T1S_Channel Puncturing**

Appendix D.14

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	6.71	-6.21	-6.03	-3.14	29.29


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)

PSD

5775MHz

20/06/2025

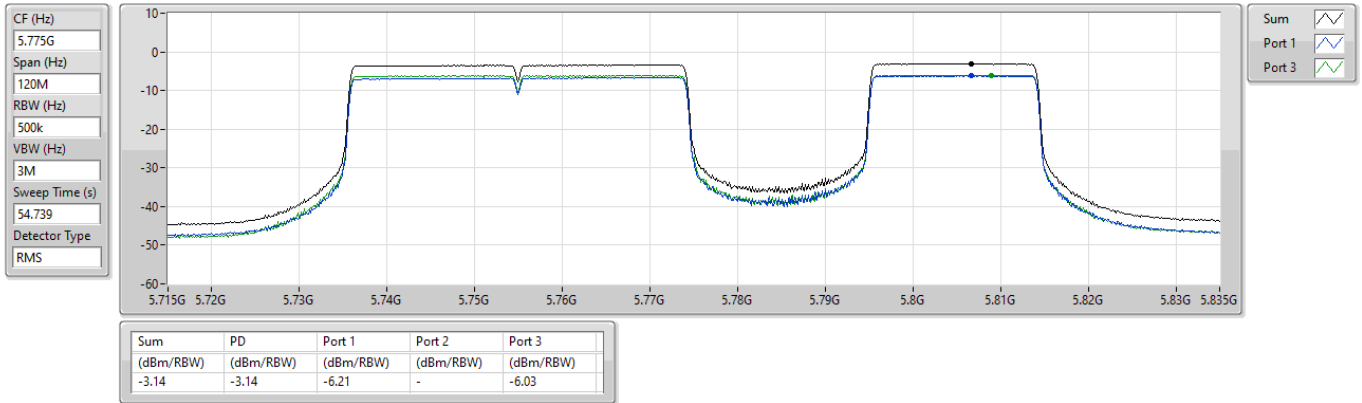



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	0.47

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Downtilt Panel Omni_4T1S_Channel Puncturing**

Appendix D.15

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	9.72	-5.41	-4.93	-5.15	-5.67	0.47	26.28


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP_3_4TX

PSD

5775MHz

20/06/2025

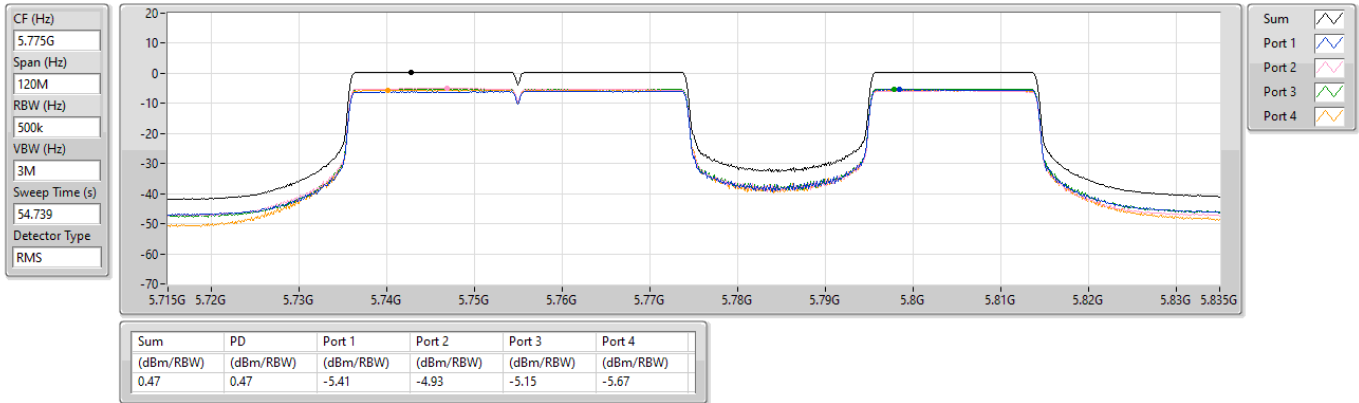



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX(Port3)	-4.65

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Patch Array_1T1S_Channel Puncturing**

Appendix D.16

Result

Mode	Result	DG (dBi)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX(Port3)	-	-	-	-	-
5775MHz	Pass	13.00	-4.65	-4.65	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.




5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX(Port3)

PSD

5775MHz

23/06/2025

CF (Hz)
5.775G
Span (Hz)
120M
RBW (Hz)
500k
VBW (Hz)
3M
Sweep Time (s)
54.744
Detector Type
RMS

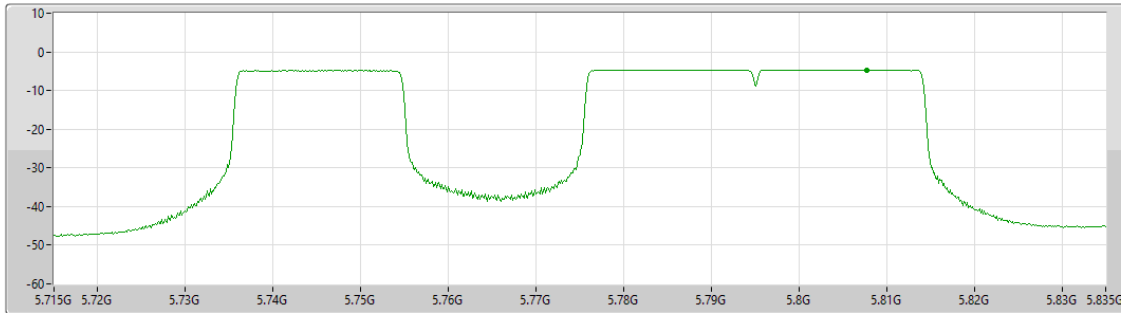

Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.65	-4.65	-	-	-4.65



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	-5.06

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Patch Array_2T1S_Channel Puncturing**

Appendix D.17

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)	-	-	-	-	-	-
5775MHz	Pass	16.01	-8.11	-7.98	-5.06	19.99


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX(Port1&Port3)

PSD

5775MHz

21/06/2025

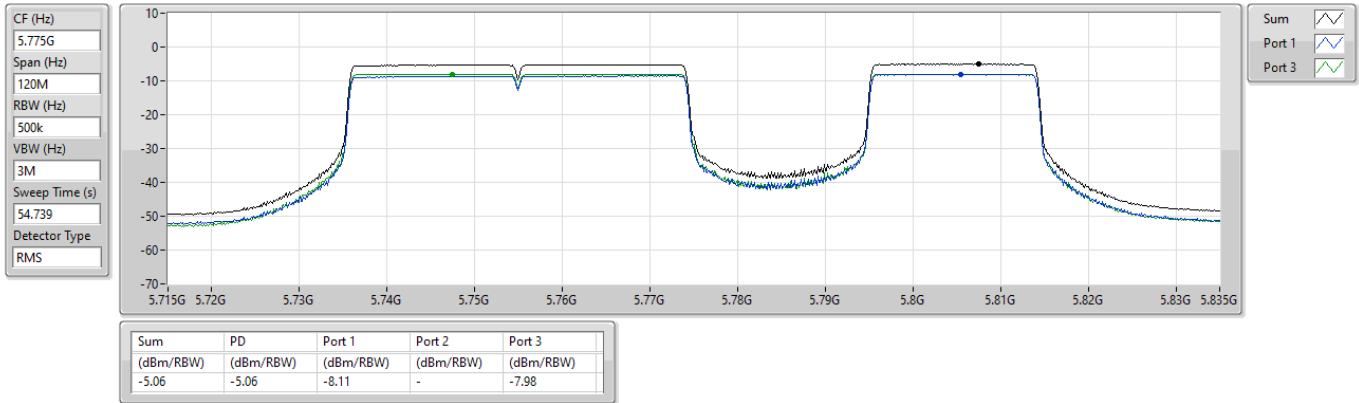



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-4.81

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



**PSD_Non-Beamforming_
Radio 2_Patch Array_4T1S_Channel Puncturing**

Appendix D.18

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-
5775MHz	Pass	19.02	-10.58	-10.40	-10.62	-10.80	-4.81	16.98


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP_2_4TX

PSD

5775MHz

21/06/2025

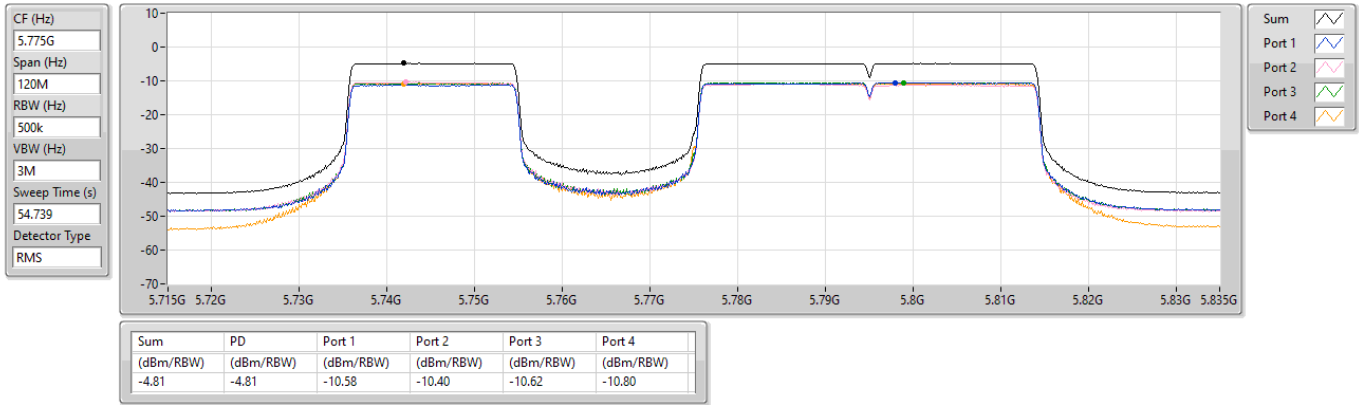



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	2.25
802.11ax HEW20_Nss1,(MCS0)_1TX	1.41

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5745MHz	Pass	3.70	2.16	2.16	30.00
5785MHz	Pass	3.70	2.25	2.25	30.00
5825MHz	Pass	3.70	2.15	2.15	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5745MHz	Pass	3.70	1.35	1.35	30.00
5785MHz	Pass	3.70	1.41	1.41	30.00
5825MHz	Pass	3.70	1.36	1.36	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5785MHz

18/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
21.15

Detector Type
RMS

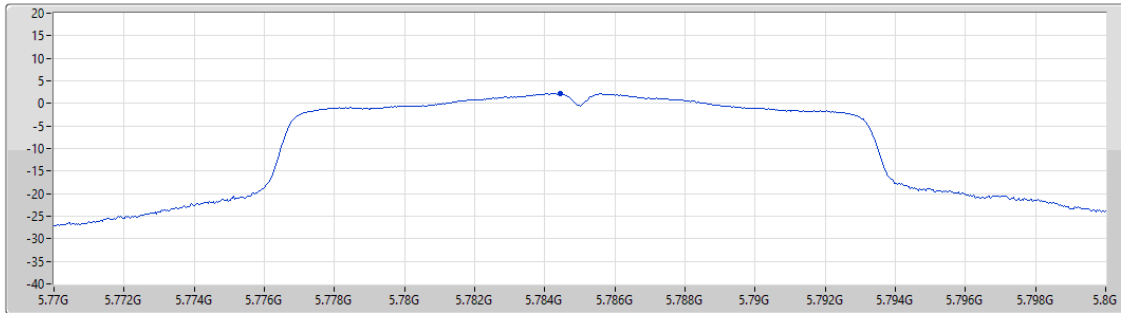

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.25	2.25	2.25

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

5785MHz

18/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.673

Detector Type
RMS

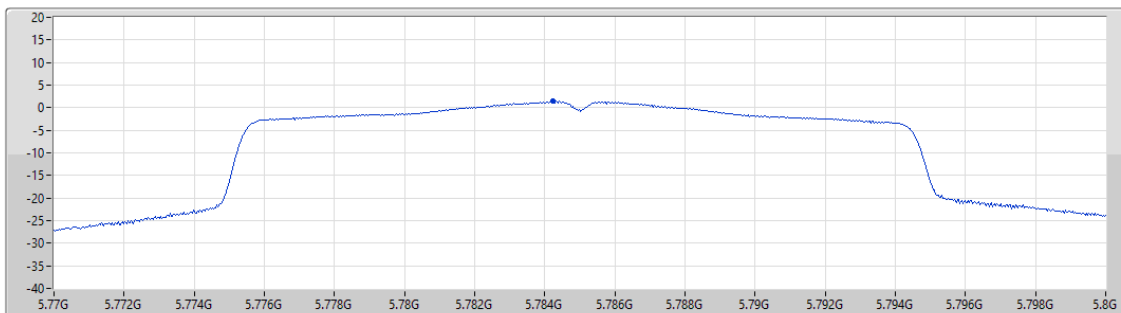

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.41	1.41	1.41



Summary

Mode	PD (dBm/RBW)
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	2.25
802.11ax HEW20_Nss1,(MCS0)_1TX	1.41

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5745MHz	Pass	13.00	2.16	2.16	23.00
5785MHz	Pass	13.00	2.25	2.25	23.00
5825MHz	Pass	13.00	2.15	2.15	23.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5745MHz	Pass	13.00	1.35	1.35	23.00
5785MHz	Pass	13.00	1.41	1.41	23.00
5825MHz	Pass	13.00	1.36	1.36	23.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5785MHz

18/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
21.15

Detector Type
RMS

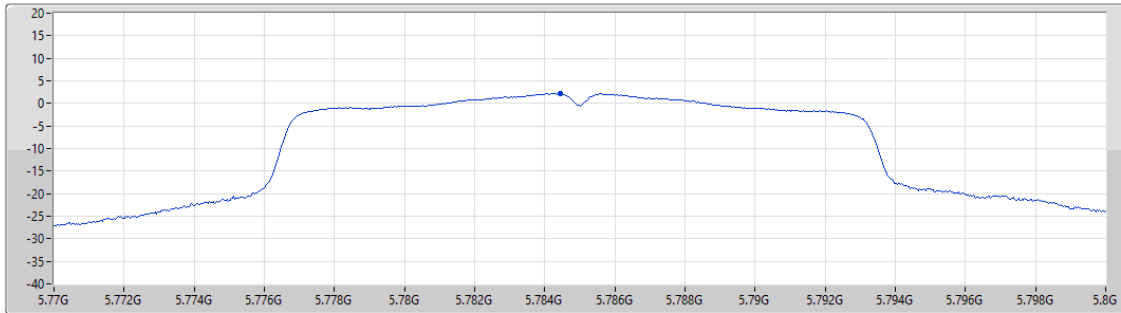

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.25	2.25	2.25

5.725-5.85GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

5785MHz

18/06/2025

CF (Hz)
5.785G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
54.673

Detector Type
RMS

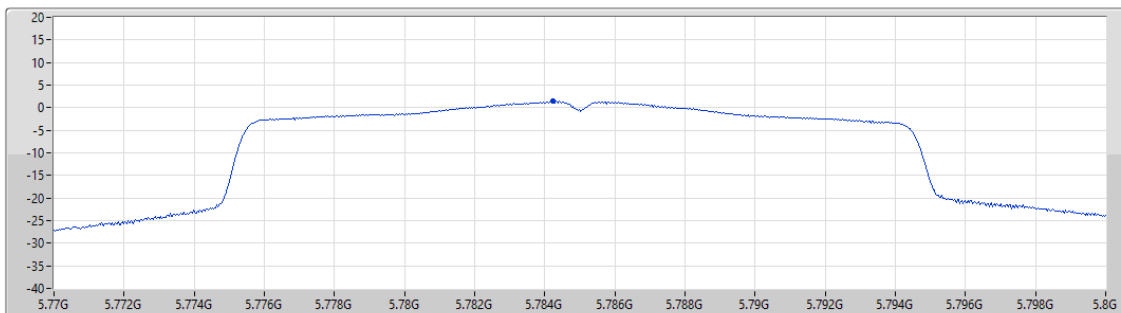

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.41	1.41	1.41



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	PK	33.88M	35.04	40.00	-4.96	3	Vertical	360	1.00

**Result**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5775MHz_PoE	Pass	PK	33.88M	35.04	40.00	-4.96	3	Vertical	360	1.00
5775MHz_PoE	Pass	PK	90.14M	26.84	43.50	-16.66	3	Vertical	360	1.00
5775MHz_PoE	Pass	PK	313.24M	30.28	46.00	-15.72	3	Vertical	360	1.00
5775MHz_PoE	Pass	PK	497.54M	30.10	46.00	-15.90	3	Vertical	360	1.00
5775MHz_PoE	Pass	PK	749.74M	32.32	46.00	-13.68	3	Vertical	360	1.00
5775MHz_PoE	Pass	PK	916.58M	28.58	46.00	-17.42	3	Vertical	360	1.00
5775MHz_PoE	Pass	PK	33.88M	24.93	40.00	-15.07	3	Horizontal	0	1.00
5775MHz_PoE	Pass	PK	90.14M	26.51	43.50	-16.99	3	Horizontal	0	1.00
5775MHz_PoE	Pass	PK	319.06M	31.37	46.00	-14.63	3	Horizontal	0	1.00
5775MHz_PoE	Pass	PK	427.7M	29.27	46.00	-16.73	3	Horizontal	0	1.00
5775MHz_PoE	Pass	PK	495.6M	31.81	46.00	-14.19	3	Horizontal	0	1.00
5775MHz_PoE	Pass	PK	712.88M	31.26	46.00	-14.74	3	Horizontal	0	1.00


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_PoE

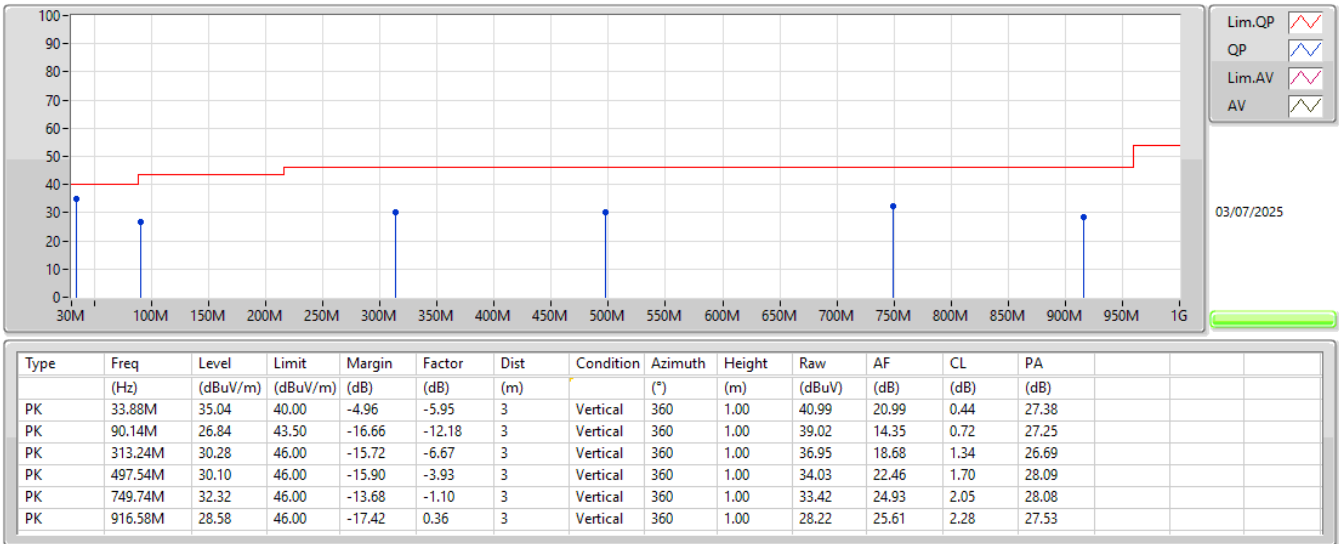

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

5775MHz_PoE

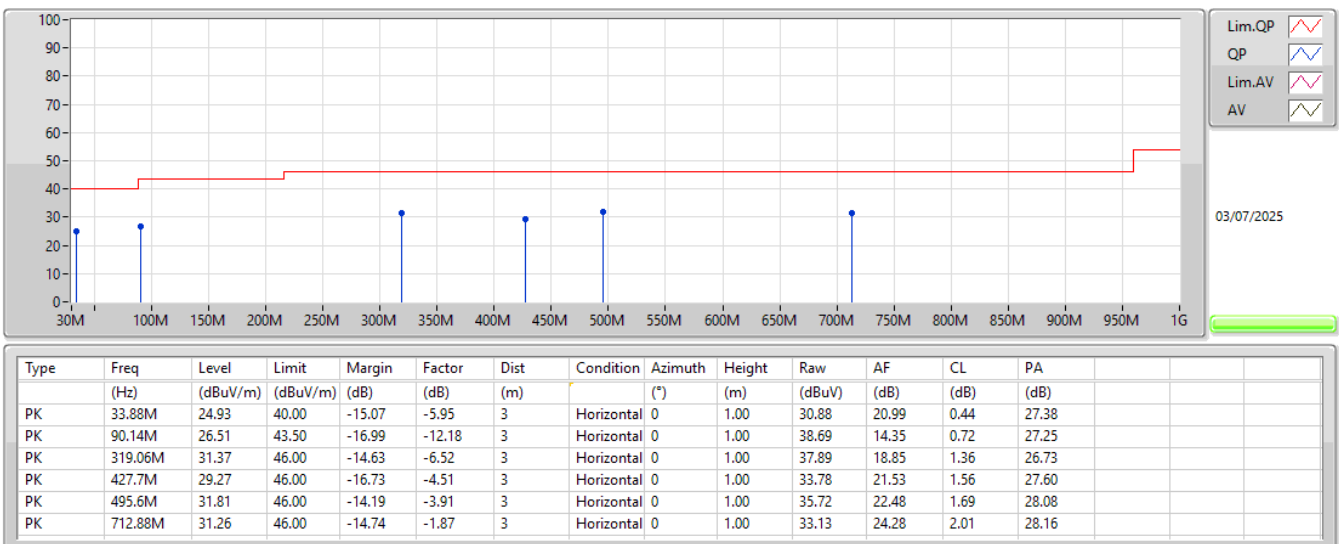



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	11.49556G	38.46	54.00	-15.54	3	Vertical	350	1.16




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	AV	11.49556G	38.46	54.00	-15.54	3	Vertical	350	1.16
5745MHz	Pass	PK	11.49916G	52.78	74.00	-21.22	3	Vertical	350	1.16
5745MHz	Pass	AV	11.4964G	38.45	54.00	-15.55	3	Horizontal	21	1.50
5745MHz	Pass	PK	11.49316G	51.35	74.00	-22.65	3	Horizontal	21	1.50


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

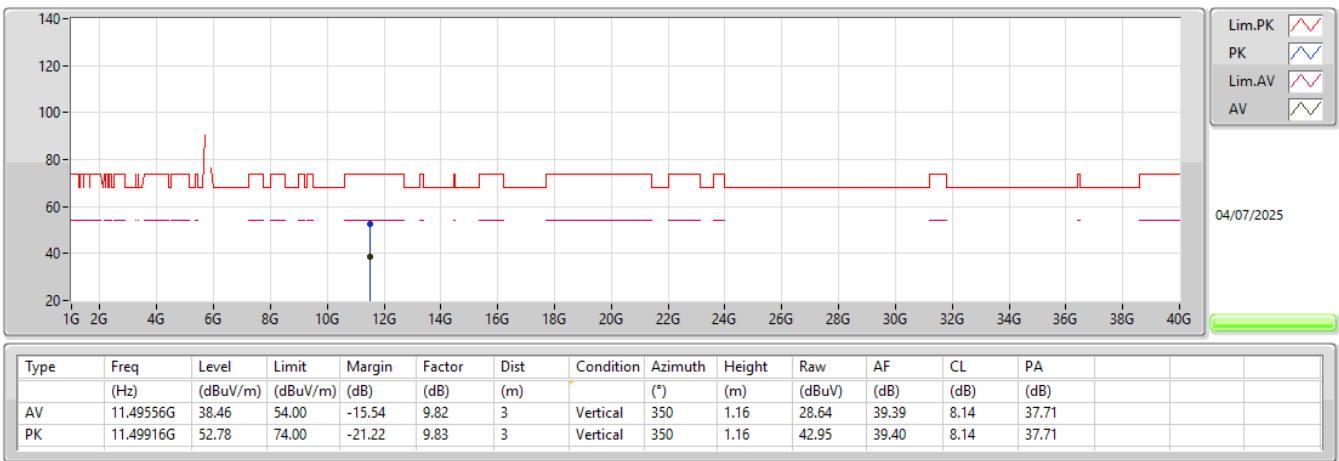

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5745MHz_TX

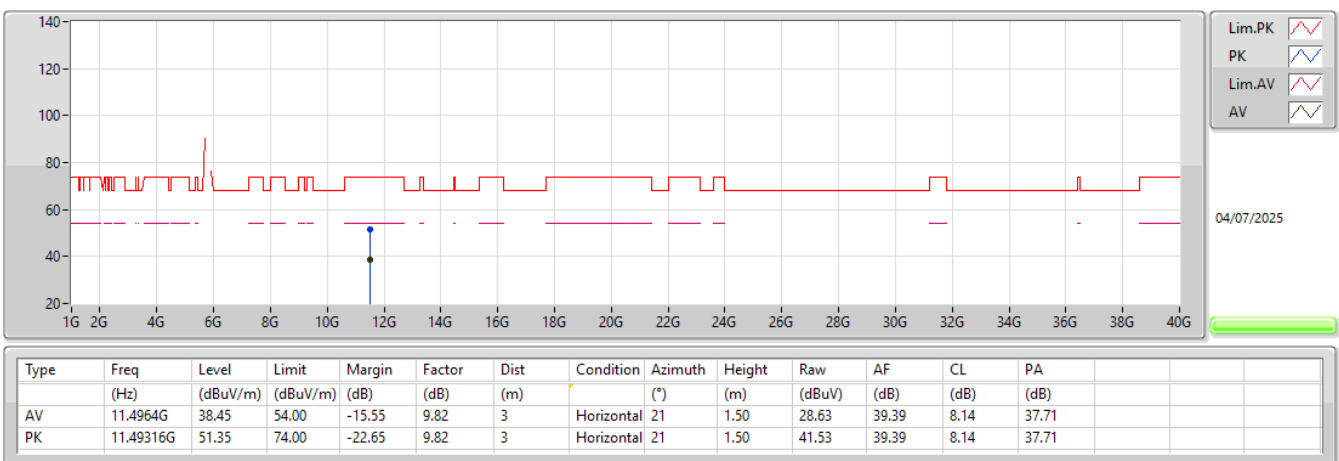

**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	Pass	AV	11.55876G	38.41	54.00	-15.59	3	Vertical	333	2.11

**Result**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	AV	11.55876G	38.41	54.00	-15.59	3	Vertical	333	2.11
5775MHz	Pass	PK	11.5504G	52.64	74.00	-21.36	3	Vertical	333	2.11
5775MHz	Pass	AV	11.54248G	38.41	54.00	-15.59	3	Horizontal	97	1.50
5775MHz	Pass	PK	11.54516G	52.71	74.00	-21.29	3	Horizontal	97	1.50


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5775MHz_TX

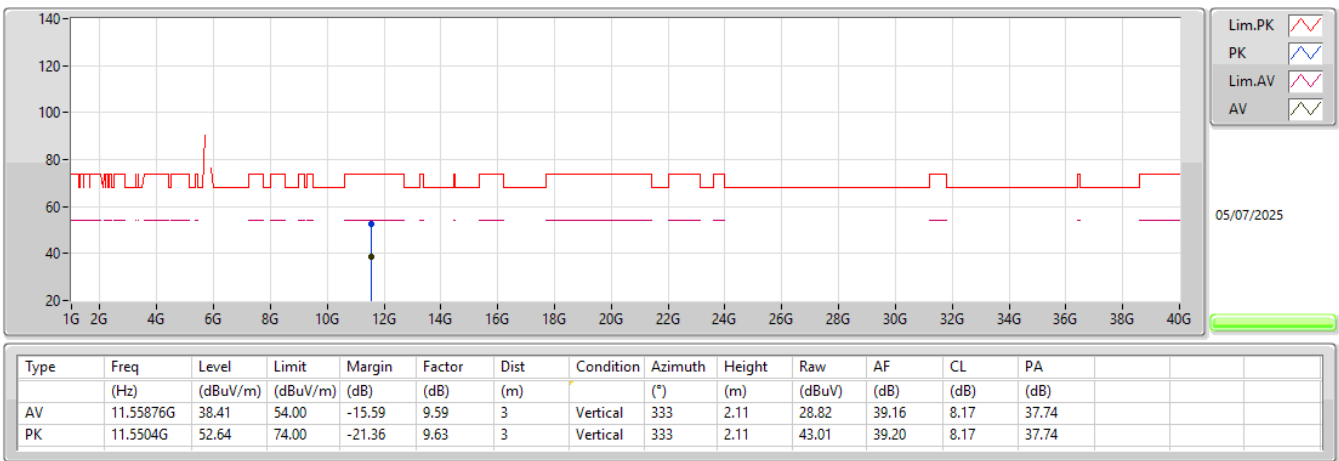

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

5775MHz_TX

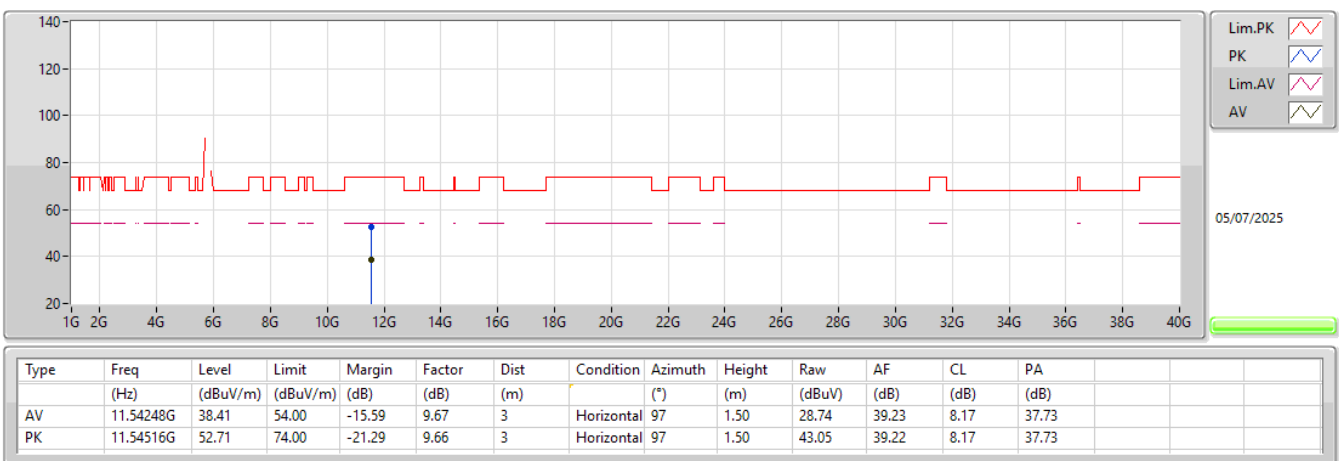



**RSE TX above 1GHz_Non-Beamforming_
Radio 2_Channel Puncturing**

Appendix E.4

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	Pass	AV	11.55896G	38.40	54.00	-15.60	3	Horizontal	108	2.81



**RSE TX above 1GHz_Non-Beamforming_
Radio 2_Channel Puncturing**


Appendix E.4

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	AV	11.55864G	38.38	54.00	-15.62	3	Vertical	87	2.43
5775MHz	Pass	PK	11.5388G	53.36	74.00	-20.64	3	Vertical	87	2.43
5775MHz	Pass	AV	11.55896G	38.40	54.00	-15.60	3	Horizontal	108	2.81
5775MHz	Pass	PK	11.54632G	52.90	74.00	-21.10	3	Horizontal	108	2.81


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX

5775MHz_TX

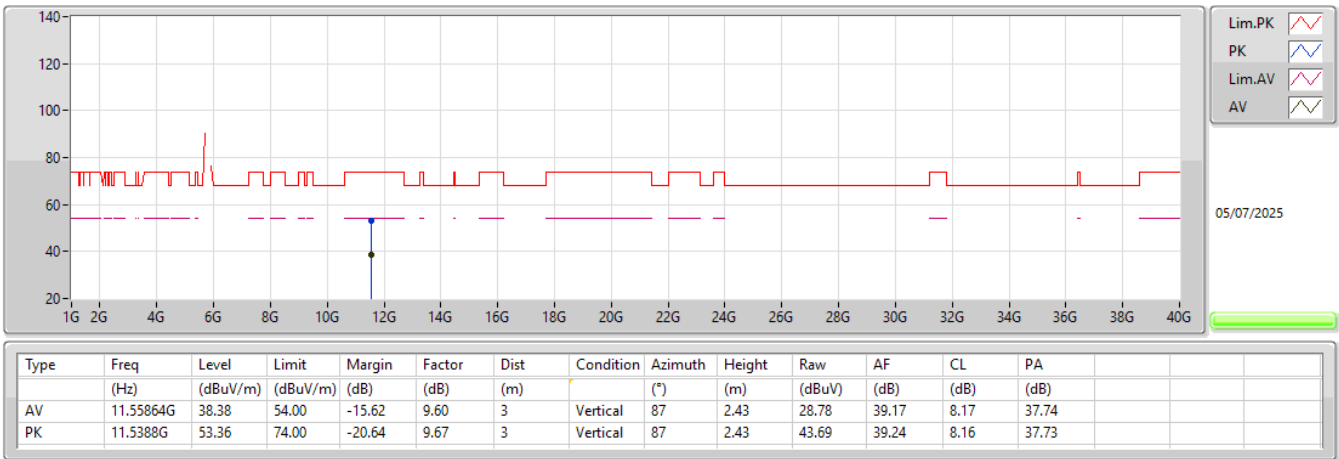

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX

5775MHz_TX

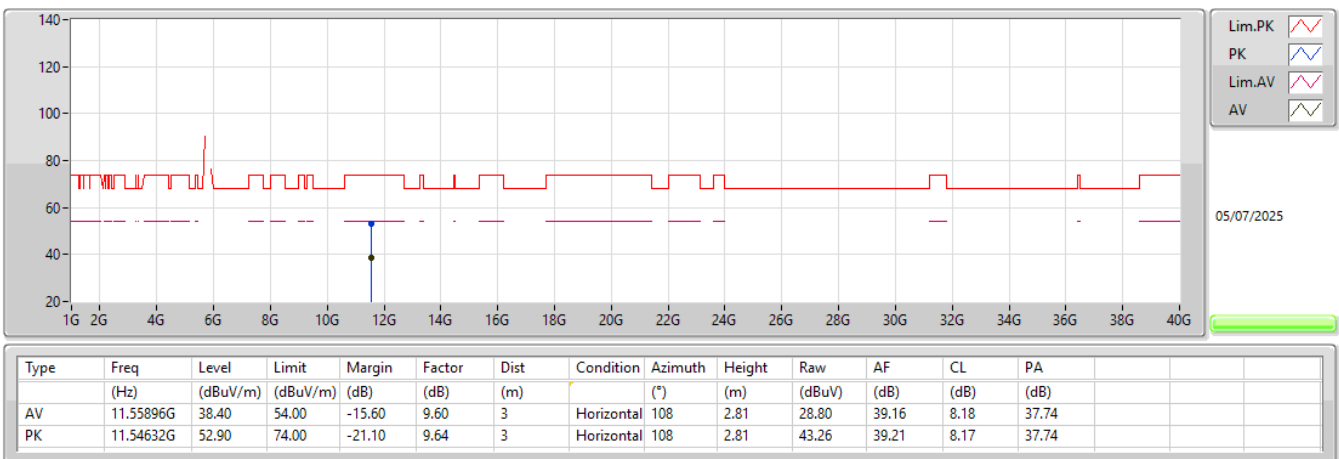



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_1TX	Pass	PK	33.88M	35.95	40.00	-4.05	3	Vertical	0	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5785MHz_PoE	Pass	PK	33.88M	35.95	40.00	-4.05	3	Vertical	0	1.00
5785MHz_PoE	Pass	PK	41.64M	34.49	40.00	-5.51	3	Vertical	0	1.00
5785MHz_PoE	Pass	PK	138.64M	28.06	43.50	-15.44	3	Vertical	0	1.00
5785MHz_PoE	Pass	PK	206.54M	26.71	43.50	-16.79	3	Vertical	0	1.00
5785MHz_PoE	Pass	PK	315.18M	31.48	46.00	-14.52	3	Vertical	0	1.00
5785MHz_PoE	Pass	PK	540.22M	29.75	46.00	-16.25	3	Vertical	0	1.00
5785MHz_PoE	Pass	PK	33.88M	23.71	40.00	-16.29	3	Horizontal	360	1.00
5785MHz_PoE	Pass	PK	138.64M	31.20	43.50	-12.30	3	Horizontal	360	1.00
5785MHz_PoE	Pass	PK	204.6M	33.27	43.50	-10.23	3	Horizontal	360	1.00
5785MHz_PoE	Pass	PK	324.88M	32.84	46.00	-13.16	3	Horizontal	360	1.00
5785MHz_PoE	Pass	PK	392.78M	31.03	46.00	-14.97	3	Horizontal	360	1.00
5785MHz_PoE	Pass	PK	499.48M	32.33	46.00	-13.67	3	Horizontal	360	1.00

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX


5785MHz_PoE

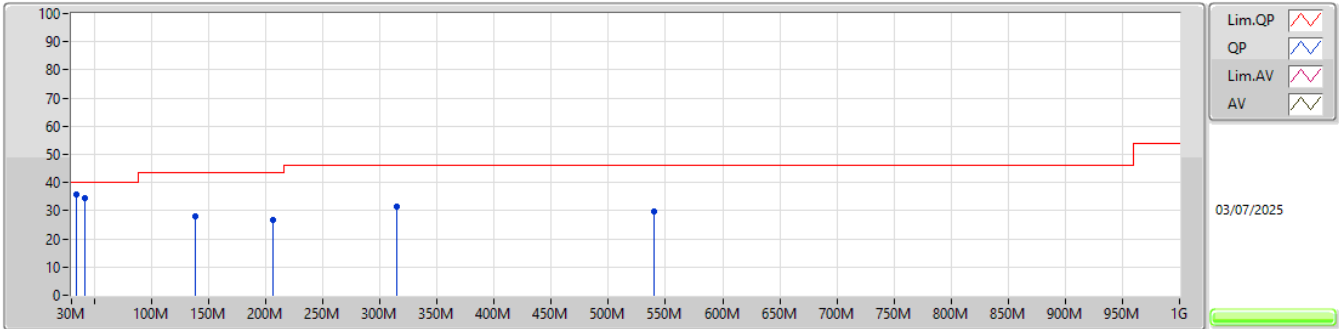

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	33.88M	35.95	40.00	-4.05	-5.95	3	Vertical	0	1.00	41.90	20.99	0.44	27.38
PK	41.64M	34.49	40.00	-5.51	-9.76	3	Vertical	0	1.00	44.25	17.11	0.48	27.35
PK	138.64M	28.06	43.50	-15.44	-9.88	3	Vertical	0	1.00	37.94	16.31	0.90	27.09
PK	206.54M	26.71	43.50	-16.79	-11.27	3	Vertical	0	1.00	37.98	14.39	1.11	26.77
PK	315.18M	31.48	46.00	-14.52	-6.62	3	Vertical	0	1.00	38.10	18.74	1.35	26.71
PK	540.22M	29.75	46.00	-16.25	-2.81	3	Vertical	0	1.00	32.56	23.57	1.73	28.11

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5785MHz_PoE

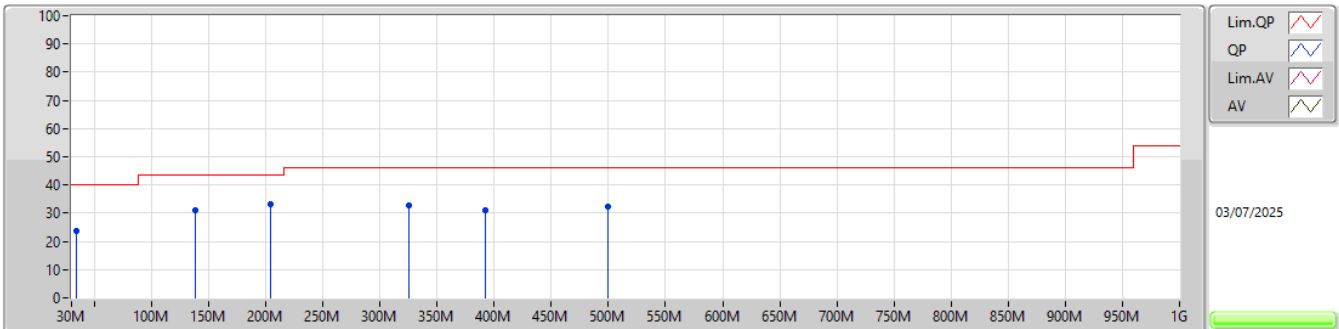

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	33.88M	23.71	40.00	-16.29	-5.95	3	Horizontal	360	1.00	29.66	20.99	0.44	27.38
PK	138.64M	31.20	43.50	-12.30	-9.88	3	Horizontal	360	1.00	41.08	16.31	0.90	27.09
PK	204.6M	33.27	43.50	-10.23	-11.25	3	Horizontal	360	1.00	44.52	14.43	1.10	26.78
PK	324.88M	32.84	46.00	-13.16	-6.51	3	Horizontal	360	1.00	39.35	18.89	1.37	26.77
PK	392.78M	31.03	46.00	-14.97	-5.29	3	Horizontal	360	1.00	36.32	20.55	1.51	27.35
PK	499.48M	32.33	46.00	-13.67	-3.98	3	Horizontal	360	1.00	36.31	22.43	1.70	28.11



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	Pass	AV	11.56024G	38.35	54.00	-15.65	3	Vertical	206	2.45

**Result**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1.(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-
5785MHz	Pass	AV	11.56024G	38.35	54.00	-15.65	3	Vertical	206	2.45
5785MHz	Pass	PK	11.57608G	52.23	74.00	-21.77	3	Vertical	206	2.45
5785MHz	Pass	AV	11.56024G	38.35	54.00	-15.65	3	Horizontal	60	2.15
5785MHz	Pass	PK	11.57616G	51.52	74.00	-22.48	3	Horizontal	60	2.15


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

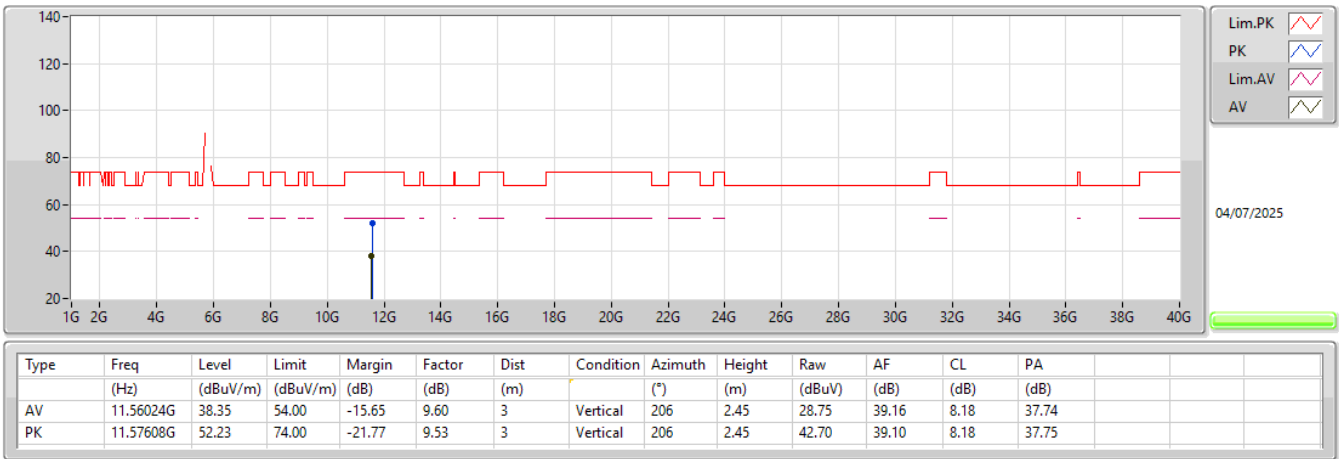

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

5785MHz_TX

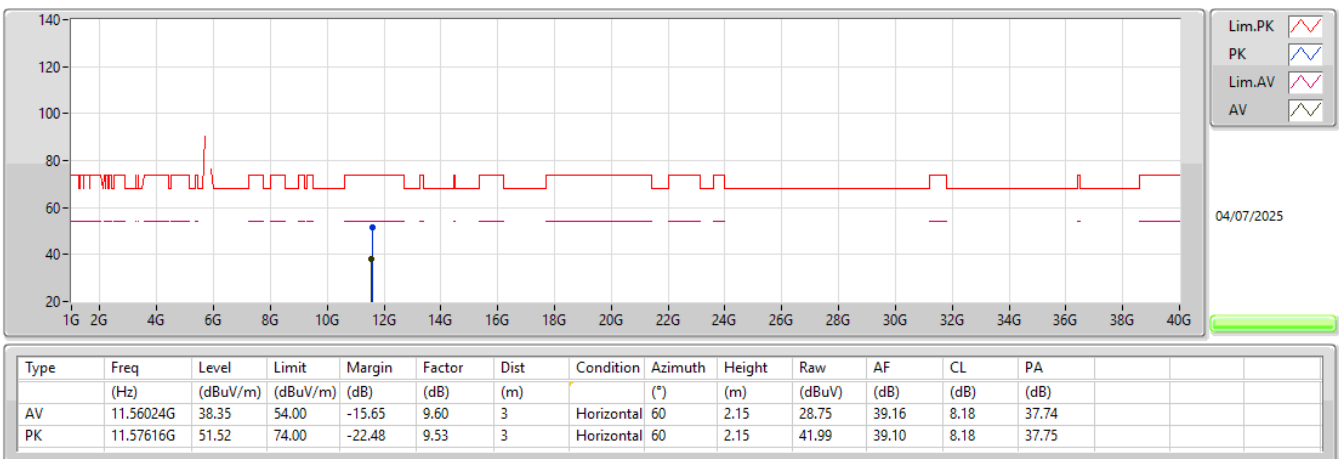



CSE Bandedge_Non-Beamforming_ Radio 2_Downtilt Panel Omni_1T1S_Full RU

Appendix E.7

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	Pass	5.685G	5.89G	PK	5.68551G	3.70	-46.61	-46.61	-42.91	-0.72	-42.19
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	Pass	5.685G	5.89G	PK	5.6851G	3.70	-47.38	-47.38	-43.68	-1.02	-42.66
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	Pass	5.645G	5.93G	PK	5.64785G	3.70	-47.41	-47.41	-43.71	-27.00	-16.71
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	Pass	5.565G	6.01G	PK	5.63665G	3.70	-42.15	-42.15	-38.45	-27.00	-11.45

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Bandedge_Non-Beamforming_ Radio 2_Downtilt Panel Omni_1T1S_Full RU

Appendix E.7

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.68551G	3.70	-46.61	-46.61	-42.91	-0.72	-42.19
5745MHz	Pass	5.685G	5.89G	PK	5.89G	3.70	-51.38	-51.38	-47.68	-1.10	-46.58
5785MHz	Pass	5.685G	5.89G	PK	5.685G	3.70	-51.32	-51.32	-47.62	-1.10	-46.52
5785MHz	Pass	5.685G	5.89G	PK	5.88959G	3.70	-51.33	-51.33	-47.63	-0.80	-46.83
5825MHz	Pass	5.685G	5.89G	PK	5.685G	3.70	-52.27	-52.27	-48.57	-1.10	-47.47
5825MHz	Pass	5.685G	5.89G	PK	5.88877G	3.70	-49.64	-49.64	-45.94	-0.19	-45.75
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.6851G	3.70	-47.38	-47.38	-43.68	-1.02	-42.66
5745MHz	Pass	5.685G	5.89G	PK	5.88969G	3.70	-50.45	-50.45	-46.75	-0.87	-45.88
5785MHz	Pass	5.685G	5.89G	PK	5.68572G	3.70	-49.71	-49.71	-46.01	-0.57	-45.44
5785MHz	Pass	5.685G	5.89G	PK	5.89G	3.70	-51.50	-51.50	-47.80	-1.10	-46.70
5825MHz	Pass	5.685G	5.89G	PK	5.68633G	3.70	-50.58	-50.58	-46.88	-0.11	-46.77
5825MHz	Pass	5.685G	5.89G	PK	5.89G	3.70	-49.28	-49.28	-45.58	-1.10	-44.48
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	5.645G	5.93G	PK	5.64785G	3.70	-47.41	-47.41	-43.71	-27.00	-16.71
5755MHz	Pass	5.645G	5.93G	PK	5.92872G	3.70	-60.05	-60.05	-56.35	-27.00	-29.35
5795MHz	Pass	5.645G	5.93G	PK	5.64913G	3.70	-48.72	-48.72	-45.02	-27.00	-18.02
5795MHz	Pass	5.645G	5.93G	PK	5.92972G	3.70	-61.44	-61.44	-57.74	-27.00	-30.74
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	5.665G	6.01G	PK	5.63665G	3.70	-42.15	-42.15	-38.45	-27.00	-11.45
5775MHz	Pass	5.665G	6.01G	PK	5.9675G	3.70	-59.95	-59.95	-56.25	-27.00	-29.25


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

CSE Bandedge [PK]

5745MHz

02/07/2025

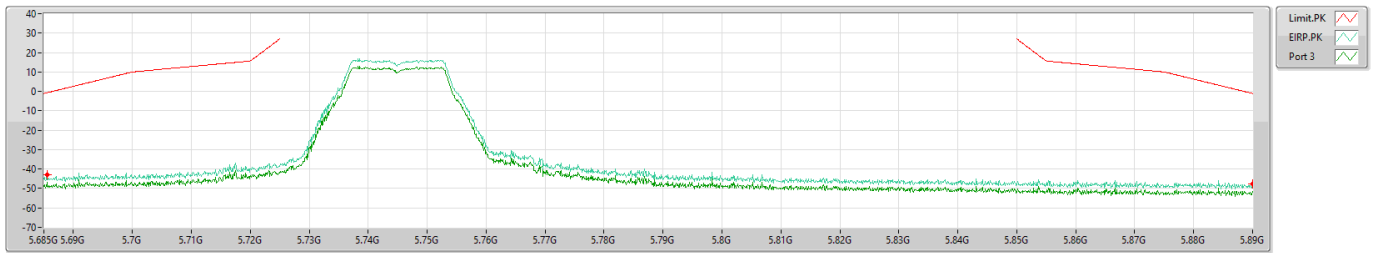


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.685G	5.89G	1M	PK	5.6851G	-42.91	-0.72	-42.19	3.70	-46.61	-	-	-46.61
5.685G	5.89G	1M	PK	5.889G	-47.68	-1.10	-46.58	3.70	-51.38	-	-	-51.38

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

CSE Bandedge [PK]

5745MHz

02/07/2025

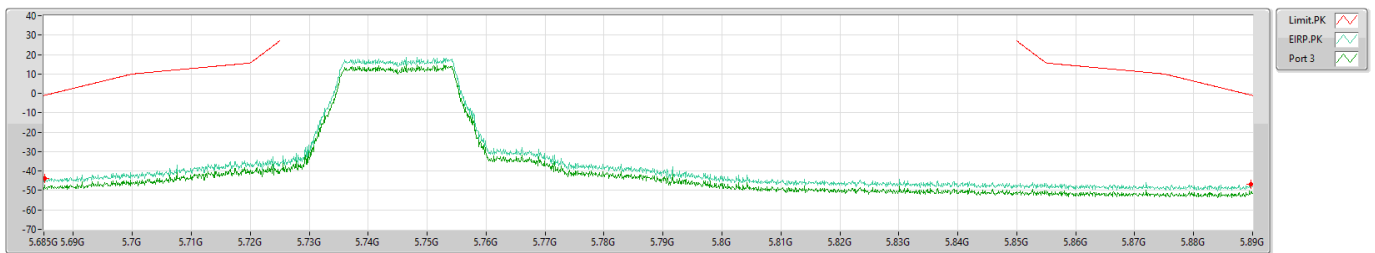


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.685G	5.89G	1M	PK	5.6851G	-43.68	-1.02	-42.66	3.70	-47.38	-	-	-47.38
5.685G	5.89G	1M	PK	5.88969G	-46.75	-0.87	-45.88	3.70	-50.45	-	-	-50.45

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

CSE Bandedge [PK]

5755MHz

02/07/2025

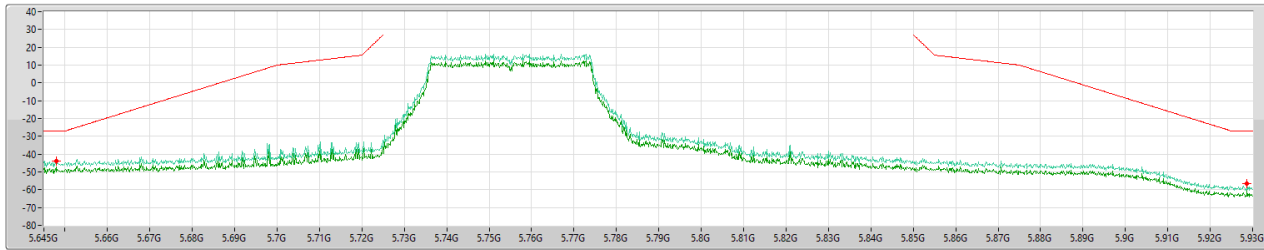


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.645G	5.93G	1M	PK	5.64785G	-43.71	-27.00	-16.71	3.70	-47.41	-	-	-47.41
5.645G	5.93G	1M	PK	5.92872G	-56.35	-27.00	-29.35	3.70	-60.05	-	-	-60.05

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

CSE Bandedge [PK]

5755MHz

02/07/2025

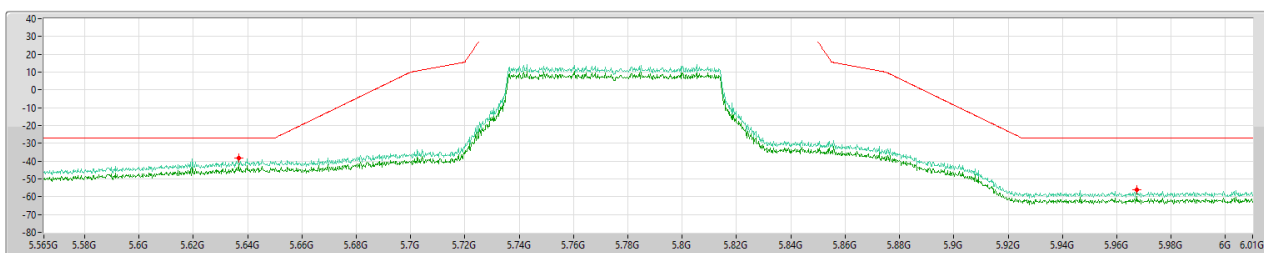

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.565G	6.01G	1M	PK	5.63665G	-38.45	-27.00	-11.45	3.70	-42.15	-	-	-42.15
5.565G	6.01G	1M	PK	5.9675G	-56.25	-27.00	-29.25	3.70	-59.95	-	-	-59.95



CSE Bandedge_Non-Beamforming_ Radio 2_Downtilt Panel Omni_2T1S_Full RU

Appendix E.8

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	Pass	5.685G	5.89G	PK	5.72211G	6.71	-21.50	-17.59	-16.11	-9.40	20.40	-29.80
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	Pass	5.685G	5.89G	PK	5.71985G	6.71	-18.10	-14.55	-12.96	-6.25	15.56	-21.81
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	Pass	5.645G	5.93G	PK	5.64942G	6.71	-39.88	-45.41	-38.81	-32.10	-27.00	-5.10
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	Pass	5.565G	6.01G	PK	5.6471G	6.71	-38.25	-35.69	-33.77	-27.06	-27.00	-0.06

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Bandedge_Non-Beamforming_ Radio 2_Downtilt Panel Omni_2T1S_Full RU

Appendix E.8

Result


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.72211G	6.71	-21.50	-17.59	-16.11	-9.40	20.40	-29.80
5745MHz	Pass	5.685G	5.89G	PK	5.8899G	6.71	-44.21	-45.22	-41.68	-34.97	-1.02	-33.95
5785MHz	Pass	5.685G	5.89G	PK	5.68531G	6.71	-54.13	-52.78	-50.39	-43.68	-0.87	-42.81
5785MHz	Pass	5.685G	5.89G	PK	5.88969G	6.71	-50.61	-50.23	-47.41	-40.70	-0.87	-39.83
5825MHz	Pass	5.685G	5.89G	PK	5.6851G	6.71	-55.14	-53.09	-50.98	-44.27	-1.02	-43.25
5825MHz	Pass	5.685G	5.89G	PK	5.85792G	6.71	-30.30	-26.21	-24.78	-18.07	14.78	-32.85
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.71985G	6.71	-18.10	-14.55	-12.96	-6.25	15.56	-21.81
5745MHz	Pass	5.685G	5.89G	PK	5.88959G	6.71	-46.74	-43.23	-41.63	-34.92	-0.80	-34.12
5785MHz	Pass	5.685G	5.89G	PK	5.6851G	6.71	-53.73	-50.75	-48.98	-42.27	-1.02	-41.25
5785MHz	Pass	5.685G	5.89G	PK	5.88939G	6.71	-51.06	-49.34	-47.11	-40.40	-0.64	-39.76
5825MHz	Pass	5.685G	5.89G	PK	5.68551G	6.71	-54.15	-53.75	-50.94	-44.23	-0.72	-43.51
5825MHz	Pass	5.685G	5.89G	PK	5.85197G	6.71	-14.50	-14.58	-11.53	-4.82	22.50	-27.32
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	5.645G	5.93G	PK	5.64942G	6.71	-39.88	-45.41	-38.81	-32.10	-27.00	-5.10
5755MHz	Pass	5.645G	5.93G	PK	5.9263G	6.71	-46.75	-52.73	-45.77	-39.06	-27.00	-12.06
5795MHz	Pass	5.645G	5.93G	PK	5.64671G	6.71	-48.77	-44.76	-43.31	-36.60	-27.00	-9.60
5795MHz	Pass	5.645G	5.93G	PK	5.92501G	6.71	-51.56	-52.10	-48.81	-42.10	-27.00	-15.10
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	5.565G	6.01G	PK	5.6471G	6.71	-38.25	-35.69	-33.77	-27.06	-27.00	-0.06
5775MHz	Pass	5.565G	6.01G	PK	5.92745G	6.71	-50.94	-49.92	-47.39	-40.68	-27.00	-13.68

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

CSE Bandedge [PK]


5745MHz

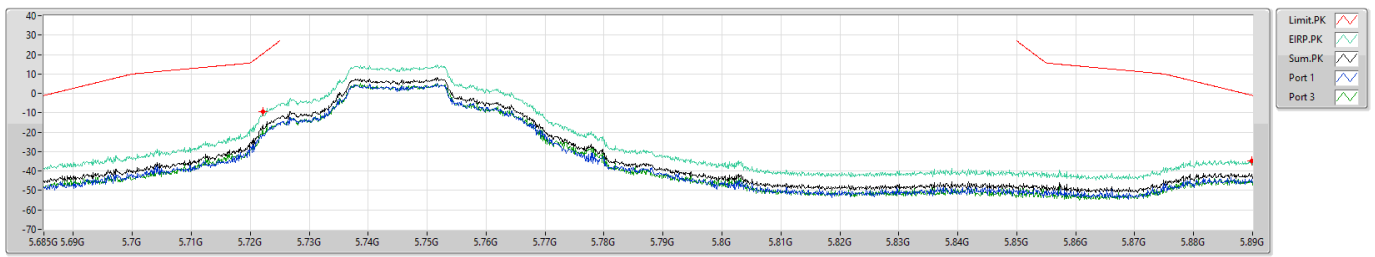

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

CSE Bandedge [PK]

5745MHz

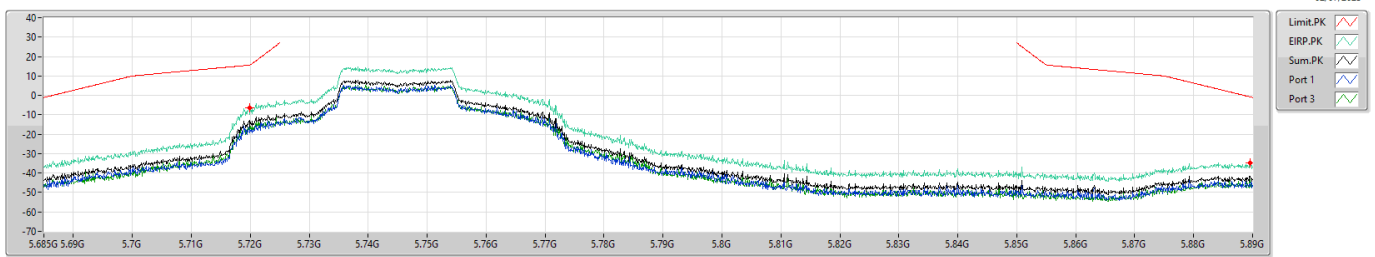


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

CSE Bandedge [PK]

5755MHz

02/07/2025

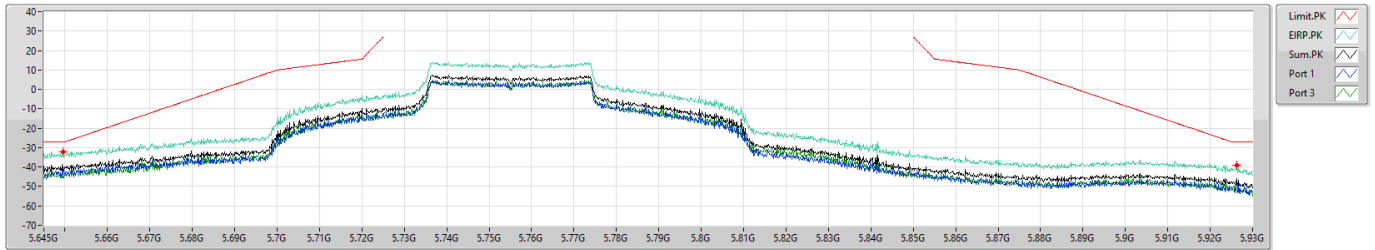


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.645G	5.93G	1M	PK	5.64942G	-32.10	-27.00	-5.10	6.71	-38.81	-39.88	-	-45.41
5.645G	5.93G	1M	PK	5.9263G	-39.06	-27.00	-12.06	6.71	-45.77	-46.75	-	-52.73

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

CSE Bandedge [PK]

5775MHz

02/07/2025

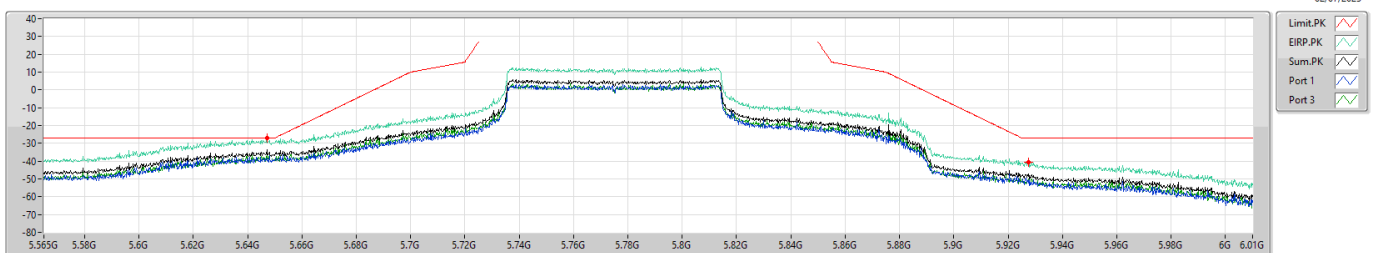

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.565G	6.01G	1M	PK	5.6471G	-27.06	-27.00	-0.06	6.71	-33.77	-38.25	-	-35.69
5.565G	6.01G	1M	PK	5.92745G	-40.68	-27.00	-13.68	6.71	-47.39	-50.94	-	-49.92



CSE Bandedge_Non-Beamforming_ Radio 2_Downtilt Panel Omni_4T1S_Full RU

Appendix E.9

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	5.685G	5.89G	PK	5.71678G	9.72	-38.62	-26.42	-44.65	-26.11	-23.10	-13.38	14.70	-28.08
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	5.685G	5.89G	PK	5.71965G	9.72	-33.64	-21.00	-39.25	-20.29	-17.48	-7.76	15.50	-23.26
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	5.645G	5.93G	PK	5.64643G	9.72	-48.73	-45.55	-49.77	-46.13	-41.18	-31.46	-27.00	-4.46
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	5.565G	6.01G	PK	5.64644G	9.72	-47.80	-48.17	-49.15	-38.53	-37.35	-27.63	-27.00	-0.63

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Bandedge_Non-Beamforming_ Radio 2_Downtilt Panel Omni_4T1S_Full RU

Appendix E.9

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.71678G	9.72	-38.62	-26.42	-44.65	-26.11	-23.10	-13.38	14.70	-28.08
5745MHz	Pass	5.685G	5.89G	PK	5.8899G	9.72	-54.85	-53.59	-51.51	-52.90	-47.02	-37.30	-1.02	-36.28
5785MHz	Pass	5.685G	5.89G	PK	5.68521G	9.72	-52.66	-50.56	-50.12	-53.37	-45.45	-35.73	-0.95	-34.78
5785MHz	Pass	5.685G	5.89G	PK	5.88898G	9.72	-54.61	-51.24	-52.95	-52.85	-46.73	-37.01	-0.34	-36.67
5825MHz	Pass	5.685G	5.89G	PK	5.685G	9.72	-53.08	-52.12	-52.31	-52.44	-46.45	-36.73	-1.10	-35.63
5825MHz	Pass	5.685G	5.89G	PK	5.85782G	9.72	-41.64	-36.46	-41.74	-24.58	-24.15	-14.43	14.81	-29.24
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.71965G	9.72	-33.64	-21.00	-39.25	-20.29	-17.48	-7.76	15.50	-23.26
5745MHz	Pass	5.685G	5.89G	PK	5.88969G	9.72	-53.59	-53.90	-50.47	-50.42	-45.77	-36.05	-0.87	-35.18
5785MHz	Pass	5.685G	5.89G	PK	5.685G	9.72	-53.15	-50.95	-52.12	-51.49	-45.83	-36.11	-1.10	-35.01
5785MHz	Pass	5.685G	5.89G	PK	5.8899G	9.72	-53.00	-52.49	-53.31	-53.02	-46.92	-37.20	-1.02	-36.18
5825MHz	Pass	5.685G	5.89G	PK	5.685G	9.72	-53.17	-51.83	-52.33	-53.95	-46.73	-37.01	-1.10	-35.91
5825MHz	Pass	5.685G	5.89G	PK	5.86058G	9.72	-39.52	-36.97	-41.30	-22.43	-22.15	-12.43	14.04	-26.47
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	5.645G	5.93G	PK	5.64643G	9.72	-48.73	-45.55	-49.77	-46.13	-41.18	-31.46	-27.00	-4.46
5755MHz	Pass	5.645G	5.93G	PK	5.9263G	9.72	-63.73	-61.94	-61.68	-49.99	-49.29	-39.57	-27.00	-12.57
5795MHz	Pass	5.645G	5.93G	PK	5.64628G	9.72	-50.87	-50.98	-48.01	-51.64	-44.11	-34.39	-27.00	-7.39
5795MHz	Pass	5.645G	5.93G	PK	5.92672G	9.72	-61.55	-63.41	-63.02	-48.36	-47.89	-38.17	-27.00	-11.17
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	5.565G	6.01G	PK	5.64644G	9.72	-47.80	-48.17	-49.15	-38.53	-37.35	-27.63	-27.00	-0.63
5775MHz	Pass	5.565G	6.01G	PK	5.92501G	9.72	-62.72	-62.43	-62.79	-37.47	-37.43	-27.71	-27.00	-0.71


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Bandedge [PK]

5745MHz

01/07/2025

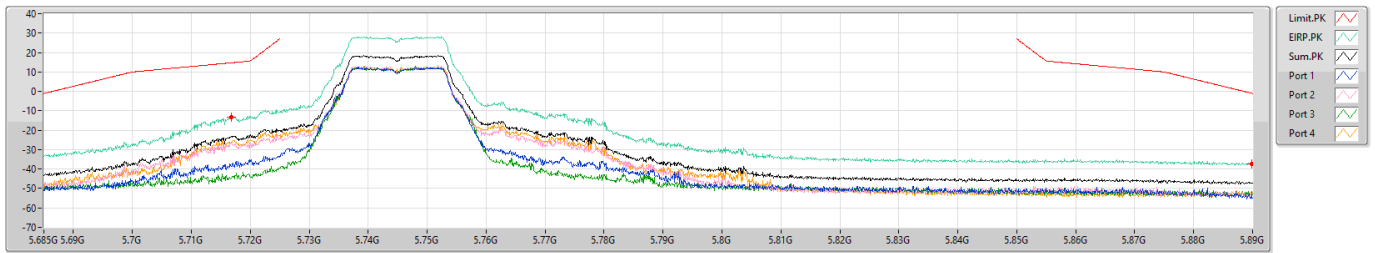


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.685G	5.89G	1M	PK	5.71678G	-13.38	14.70	-28.08	9.72	-23.10	-38.62	-26.42	-44.65	-26.11
5.685G	5.89G	1M	PK	5.8899G	-37.30	-1.02	-36.28	9.72	-47.02	-54.85	-53.59	-51.51	-52.90

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Bandedge [PK]

5745MHz

01/07/2025

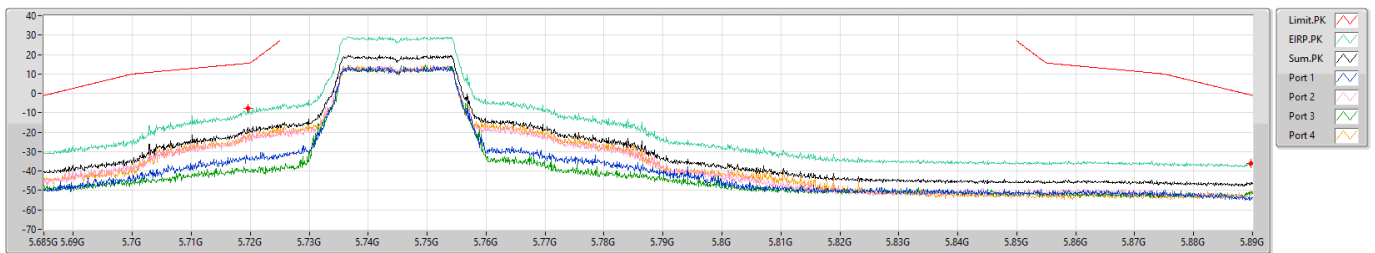


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.685G	5.89G	1M	PK	5.71965G	-7.76	15.50	-23.26	9.72	-17.48	-33.64	-21.00	-39.25	-20.29
5.685G	5.89G	1M	PK	5.88969G	-36.05	-0.87	-35.18	9.72	-45.77	-53.59	-53.90	-50.47	-50.42

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Bandedge [PK]

5755MHz

01/07/2025

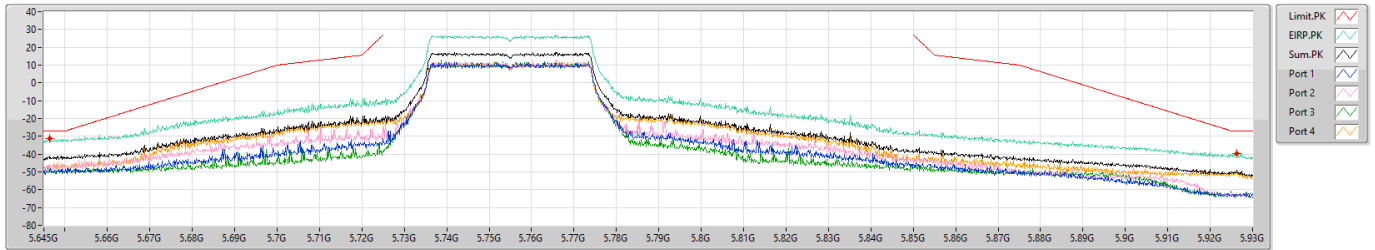


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.645G	5.93G	1M	PK	5.64643G	-31.46	-27.00	-4.46	9.72	-41.18	-48.73	-45.55	-49.77	-46.13
5.645G	5.93G	1M	PK	5.9263G	-39.57	-27.00	-12.57	9.72	-49.29	-63.73	-61.94	-61.68	-49.99

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

CSE Bandedge [PK]

5755MHz

01/07/2025

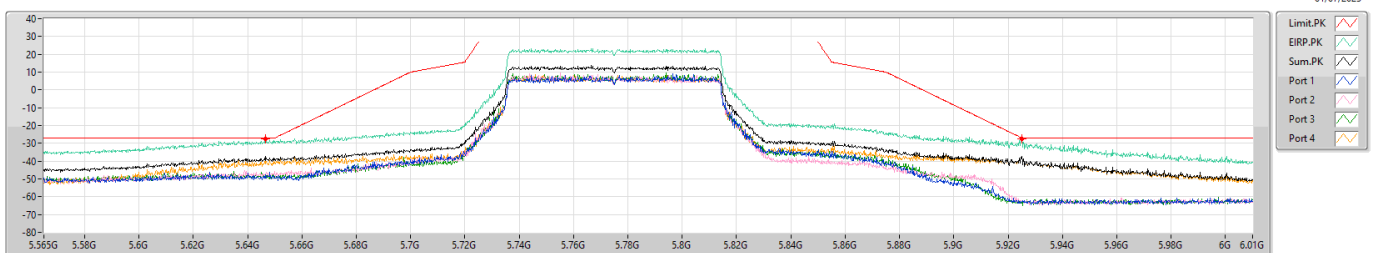

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.565G	6.01G	1M	PK	5.64644G	-27.63	-27.00	-0.63	9.72	-37.35	-47.80	-48.17	-49.15	-38.53
5.565G	6.01G	1M	PK	5.92501G	-27.71	-27.00	-0.71	9.72	-37.43	-62.72	-62.43	-62.79	-37.47



Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX(Port3)	Pass	5.685G	5.89G	PK	5.68551G	13.00	-46.61	-46.61	-33.61	-0.72	-32.89
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	Pass	5.685G	5.89G	PK	5.6851G	13.00	-47.38	-47.38	-34.38	-1.02	-33.36
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	Pass	5.645G	5.93G	PK	5.64785G	13.00	-47.41	-47.41	-34.41	-27.00	-7.41
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	Pass	5.565G	6.01G	PK	5.63665G	13.00	-42.15	-42.15	-29.15	-27.00	-2.15

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Bandedge_Non-Beamforming_ Radio 2_Patch Array_1T1S_Full RU

Appendix E.10

Result


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1,(6Mbps)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.68551G	13.00	-46.61	-46.61	-33.61	-0.72	-32.89
5745MHz	Pass	5.685G	5.89G	PK	5.89G	13.00	-51.38	-51.38	-38.38	-1.10	-37.28
5785MHz	Pass	5.685G	5.89G	PK	5.685G	13.00	-51.32	-51.32	-38.32	-1.10	-37.22
5785MHz	Pass	5.685G	5.89G	PK	5.88959G	13.00	-51.33	-51.33	-38.33	-0.80	-37.53
5825MHz	Pass	5.685G	5.89G	PK	5.685G	13.00	-52.27	-52.27	-39.27	-1.10	-38.17
5825MHz	Pass	5.685G	5.89G	PK	5.88877G	13.00	-49.64	-49.64	-36.64	-0.19	-36.45
802.11be EHT20_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.6851G	13.00	-47.38	-47.38	-34.38	-1.02	-33.36
5745MHz	Pass	5.685G	5.89G	PK	5.88969G	13.00	-50.45	-50.45	-37.45	-0.87	-36.58
5785MHz	Pass	5.685G	5.89G	PK	5.68572G	13.00	-49.71	-49.71	-36.71	-0.57	-36.14
5785MHz	Pass	5.685G	5.89G	PK	5.89G	13.00	-51.50	-51.50	-38.50	-1.10	-37.40
5825MHz	Pass	5.685G	5.89G	PK	5.68633G	13.00	-50.58	-50.58	-37.58	-0.11	-37.47
5825MHz	Pass	5.685G	5.89G	PK	5.89G	13.00	-49.28	-49.28	-36.28	-1.10	-35.18
802.11be EHT40_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	5.645G	5.93G	PK	5.64785G	13.00	-47.41	-47.41	-34.41	-27.00	-7.41
5755MHz	Pass	5.645G	5.93G	PK	5.92872G	13.00	-60.05	-60.05	-47.05	-27.00	-20.05
5795MHz	Pass	5.645G	5.93G	PK	5.64913G	13.00	-48.72	-48.72	-35.72	-27.00	-8.72
5795MHz	Pass	5.645G	5.93G	PK	5.92972G	13.00	-61.44	-61.44	-48.44	-27.00	-21.44
802.11be EHT80_Nss1,(MCS0)_1TX(Port3)	-	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	5.565G	6.01G	PK	5.63665G	13.00	-42.15	-42.15	-29.15	-27.00	-2.15
5775MHz	Pass	5.565G	6.01G	PK	5.9675G	13.00	-59.95	-59.95	-46.95	-27.00	-19.95

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX(Port3)

CSE Bandedge [PK]

5745MHz

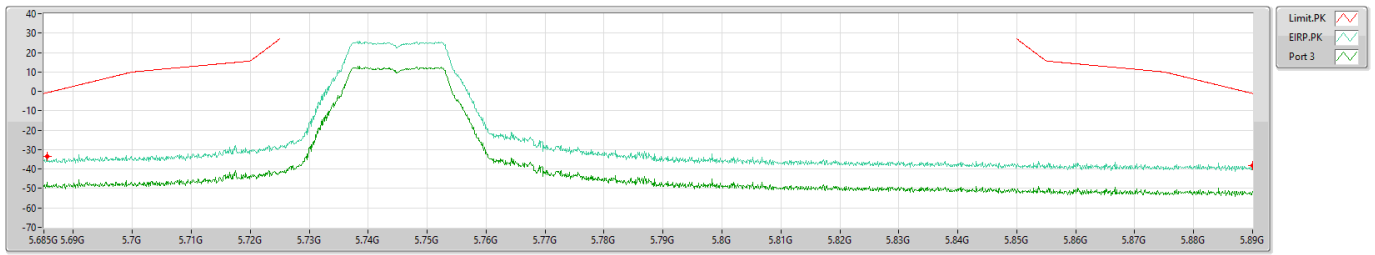


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.685G	5.89G	1M	PK	5.68551G	-33.61	-0.72	-32.89	13.00	-46.61	-	-	-46.61
5.685G	5.89G	1M	PK	5.89G	-38.38	-1.10	-37.28	13.00	-51.38	-	-	-51.38

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX(Port3)

CSE Bandedge [PK]

5745MHz

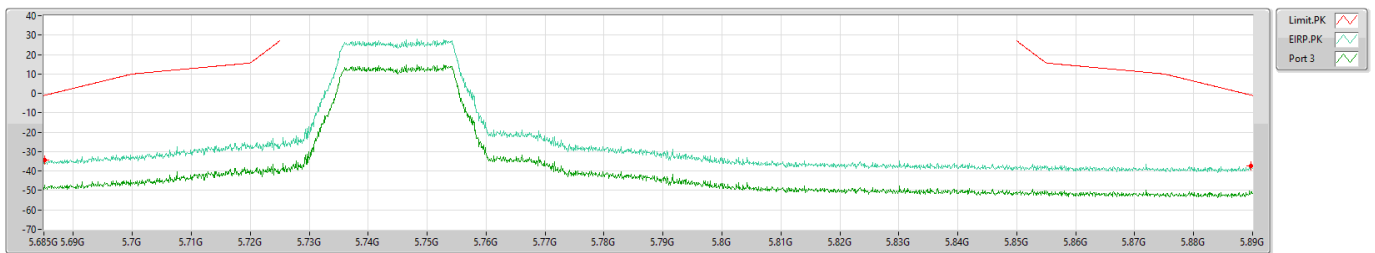


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.685G	5.89G	1M	PK	5.6851G	-34.38	-1.02	-33.36	13.00	-47.38	-	-	-47.38
5.685G	5.89G	1M	PK	5.88969G	-37.45	-0.87	-36.58	13.00	-50.45	-	-	-50.45

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX(Port3)

CSE Bandedge [PK]

5755MHz

02/07/2025

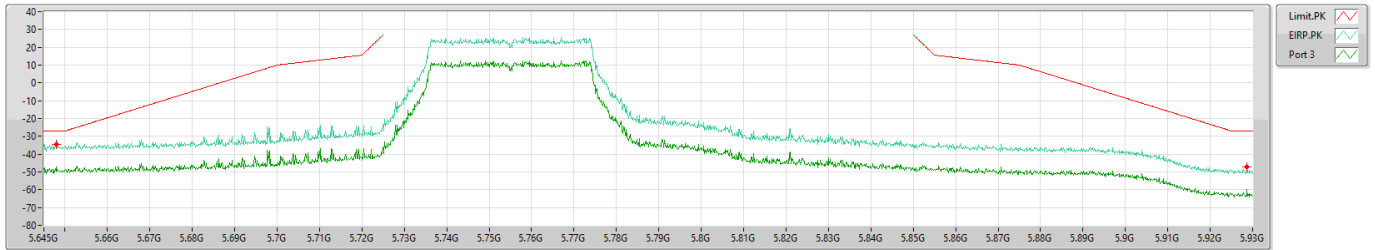


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.645G	5.93G	1M	PK	5.64785G	-34.41	-27.00	-7.41	13.00	-47.41	-	-	-47.41
5.645G	5.93G	1M	PK	5.92872G	-47.05	-27.00	-20.05	13.00	-60.05	-	-	-60.05

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX(Port3)

CSE Bandedge [PK]

5755MHz

02/07/2025

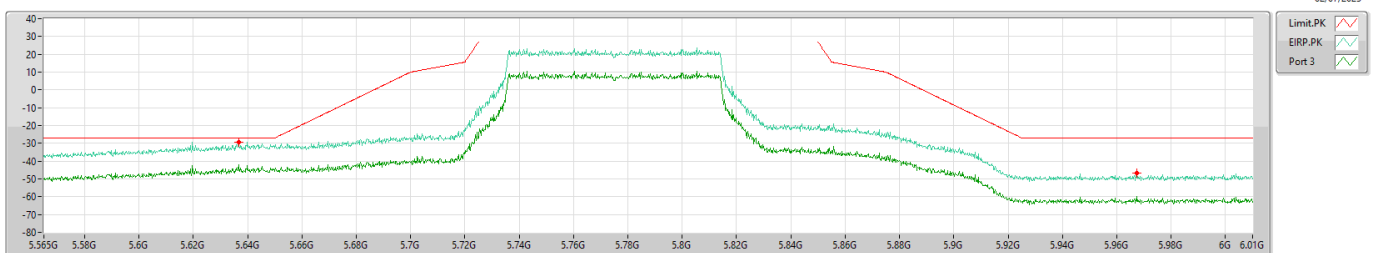

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.565G	6.01G	1M	PK	5.63665G	-29.15	-27.00	-2.15	13.00	-42.15	-	-	-42.15
5.565G	6.01G	1M	PK	5.9675G	-46.95	-27.00	-19.95	13.00	-59.95	-	-	-59.95



Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)	Pass	5.685G	5.89G	PK	5.72211G	16.01	-21.50	-17.59	-16.11	-0.10	20.40	-20.50
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	Pass	5.685G	5.89G	PK	5.71985G	16.01	-18.10	-14.55	-12.96	3.05	15.56	-12.51
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	Pass	5.645G	5.93G	PK	5.64671G	16.01	-48.77	-44.76	-43.31	-27.30	-27.00	-0.30
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	Pass	5.565G	6.01G	PK	5.64199G	16.01	-45.20	-48.91	-43.66	-27.65	-27.00	-0.65

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Bandedge_Non-Beamforming_ Radio 2_Patch Array_2T1S_Full RU

Appendix E.11

Result


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P3 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1,(6Mops)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.72211G	16.01	-21.50	-17.59	-16.11	-0.10	20.40	-20.50
5745MHz	Pass	5.685G	5.89G	PK	5.8899G	16.01	-44.21	-45.22	-41.68	-25.67	-1.02	-24.65
5785MHz	Pass	5.685G	5.89G	PK	5.68531G	16.01	-54.13	-52.78	-50.39	-34.38	-0.87	-33.51
5785MHz	Pass	5.685G	5.89G	PK	5.88969G	16.01	-50.61	-50.23	-47.41	-31.40	-0.87	-30.53
5825MHz	Pass	5.685G	5.89G	PK	5.6851G	16.01	-55.14	-53.09	-50.98	-34.97	-1.02	-33.95
5825MHz	Pass	5.685G	5.89G	PK	5.85792G	16.01	-30.30	-26.21	-24.78	-8.77	14.78	-23.55
802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.71985G	16.01	-18.10	-14.55	-12.96	3.05	15.56	-12.51
5745MHz	Pass	5.685G	5.89G	PK	5.88959G	16.01	-46.74	-43.23	-41.63	-25.62	-0.80	-24.82
5785MHz	Pass	5.685G	5.89G	PK	5.6851G	16.01	-53.73	-50.75	-48.98	-32.97	-1.02	-31.95
5785MHz	Pass	5.685G	5.89G	PK	5.88939G	16.01	-51.06	-49.34	-47.11	-31.10	-0.64	-30.46
5825MHz	Pass	5.685G	5.89G	PK	5.68551G	16.01	-54.15	-53.75	-50.94	-34.93	-0.72	-34.21
5825MHz	Pass	5.685G	5.89G	PK	5.85197G	16.01	-14.50	-14.58	-11.53	4.48	22.50	-18.02
802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	5.645G	5.93G	PK	5.64871G	16.01	-45.29	-48.36	-43.55	-27.54	-27.00	-0.54
5755MHz	Pass	5.645G	5.93G	PK	5.92359G	16.01	-52.10	-49.16	-47.38	-31.37	-25.95	-5.42
5795MHz	Pass	5.645G	5.93G	PK	5.64671G	16.01	-48.77	-44.76	-43.31	-27.30	-27.00	-0.30
5795MHz	Pass	5.645G	5.93G	PK	5.92501G	16.01	-51.56	-52.10	-48.81	-32.80	-27.00	-5.80
802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)	-	-	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	5.665G	6.01G	PK	5.64199G	16.01	-45.20	-48.91	-43.66	-27.65	-27.00	-0.65
5775MHz	Pass	5.665G	6.01G	PK	5.923G	16.01	-54.19	-54.74	-51.45	-35.44	-25.52	-9.92

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX(Port1&Port3)

CSE Bandedge [PK]


5745MHz

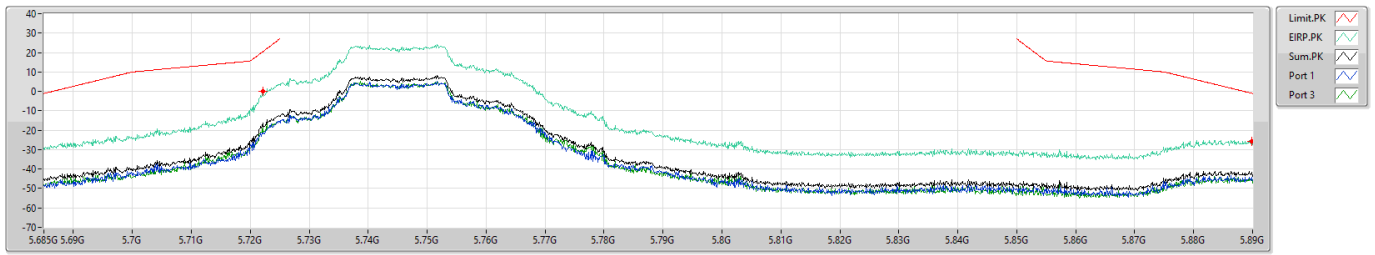

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX(Port1&Port3)

CSE Bandedge [PK]

5745MHz

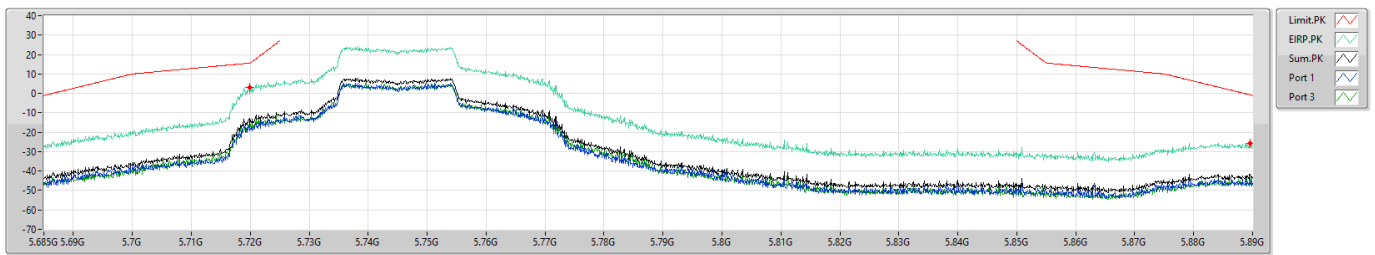


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX(Port1&Port3)

CSE Bandedge [PK]

5795MHz

02/07/2025

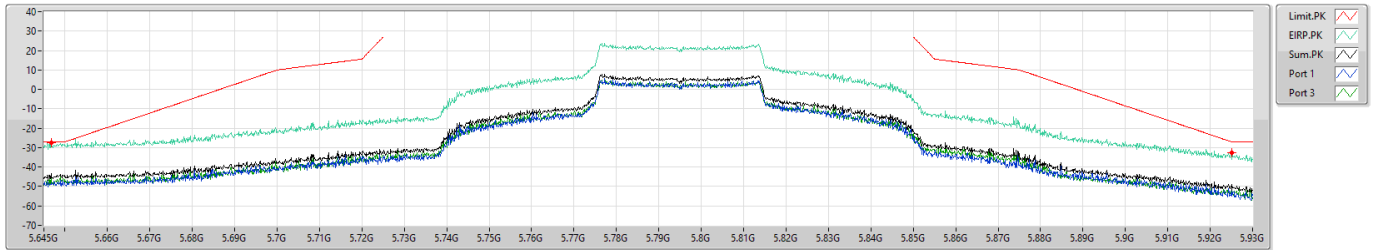


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.645G	5.93G	1M	PK	5.64671G	-27.30	-27.00	-0.30	16.01	-43.31	-48.77	-	-44.76
5.645G	5.93G	1M	PK	5.92501G	-32.80	-27.00	-5.80	16.01	-48.81	-51.56	-	-52.10

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX(Port1&Port3)

CSE Bandedge [PK]

5775MHz

02/07/2025

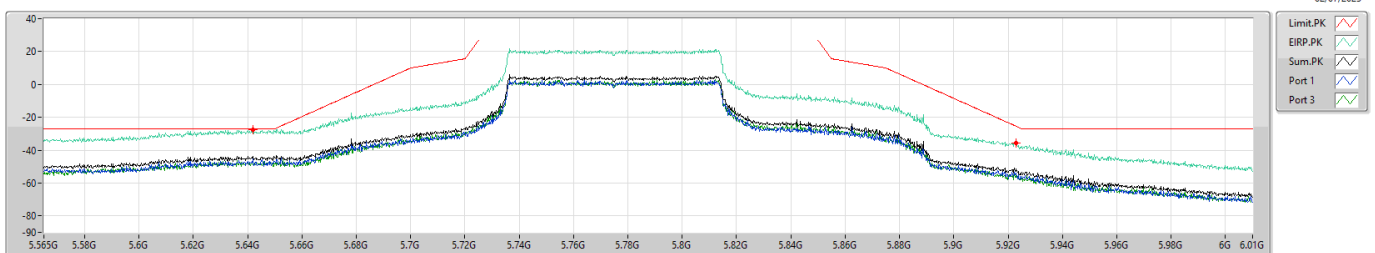

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)
5.565G	6.01G	1M	PK	5.64199G	-27.65	-27.00	-0.65	16.01	-43.66	-45.20	-	-48.91
5.565G	6.01G	1M	PK	5.923G	-35.44	-25.52	-9.92	16.01	-51.45	-54.19	-	-54.74



Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	5.685G	5.89G	PK	5.72303G	19.02	-23.63	-19.71	-22.99	-22.04	-15.80	3.22	22.50	-19.28
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	5.685G	5.89G	PK	5.71944G	19.02	-22.75	-22.35	-27.67	-19.55	-16.21	2.81	15.44	-12.63
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	5.645G	5.93G	PK	5.64999G	19.02	-52.64	-51.98	-51.00	-52.86	-46.04	-27.02	-27.00	-0.02
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	5.565G	6.01G	PK	5.63464G	19.02	-54.61	-53.77	-50.57	-52.51	-46.57	-27.55	-27.00	-0.55

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Bandedge_Non-Beamforming_ Radio 2_Patch Array_4T1S_Full RU

Appendix E.12

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.72303G	19.02	-23.63	-19.71	-22.99	-22.04	-15.80	3.22	22.50	-19.28
5745MHz	Pass	5.685G	5.89G	PK	5.88949G	19.02	-49.09	-47.27	-50.39	-49.56	-42.90	-23.88	-0.72	-23.16
5785MHz	Pass	5.685G	5.89G	PK	5.685G	19.02	-55.77	-53.44	-53.24	-55.18	-48.25	-29.23	-1.10	-28.13
5785MHz	Pass	5.685G	5.89G	PK	5.8899G	19.02	-58.12	-55.10	-54.40	-55.56	-49.57	-30.55	-1.02	-29.53
5825MHz	Pass	5.685G	5.89G	PK	5.6851G	19.02	-55.72	-51.86	-53.55	-55.46	-47.84	-28.82	-1.02	-27.80
5825MHz	Pass	5.685G	5.89G	PK	5.85761G	19.02	-38.03	-34.39	-32.78	-38.83	-29.28	-10.26	14.87	-25.13
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5745MHz	Pass	5.685G	5.89G	PK	5.71944G	19.02	-22.75	-22.35	-27.67	-19.55	-16.21	2.81	15.44	-12.63
5745MHz	Pass	5.685G	5.89G	PK	5.88949G	19.02	-52.70	-51.29	-50.24	-49.41	-44.72	-25.70	-0.72	-24.98
5785MHz	Pass	5.685G	5.89G	PK	5.68551G	19.02	-56.43	-50.23	-54.43	-54.56	-47.24	-28.22	-0.72	-27.50
5785MHz	Pass	5.685G	5.89G	PK	5.88949G	19.02	-57.13	-54.86	-55.32	-54.79	-49.41	-30.39	-0.72	-29.67
5825MHz	Pass	5.685G	5.89G	PK	5.68521G	19.02	-55.67	-52.88	-53.62	-56.18	-48.35	-29.33	-0.95	-28.38
5825MHz	Pass	5.685G	5.89G	PK	5.85095G	19.02	-18.88	-17.79	-14.62	-16.20	-10.55	8.47	24.84	-16.37
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5755MHz	Pass	5.645G	5.93G	PK	5.64956G	19.02	-53.13	-52.67	-52.07	-54.08	-46.91	-27.89	-27.00	-0.89
5755MHz	Pass	5.645G	5.93G	PK	5.92615G	19.02	-68.85	-65.39	-66.64	-53.28	-52.73	-33.71	-27.00	-6.71
5795MHz	Pass	5.645G	5.93G	PK	5.64999G	19.02	-52.64	-51.98	-51.00	-52.86	-46.04	-27.02	-27.00	-0.02
5795MHz	Pass	5.645G	5.93G	PK	5.92957G	19.02	-70.98	-68.42	-69.31	-53.73	-53.39	-34.37	-27.00	-7.37
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5775MHz	Pass	5.565G	6.01G	PK	5.63464G	19.02	-54.61	-53.77	-50.57	-52.51	-46.57	-27.55	-27.00	-0.55
5775MHz	Pass	5.565G	6.01G	PK	5.92923G	19.02	-60.84	-63.63	-60.54	-53.34	-51.69	-32.67	-27.00	-5.67


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Bandedge [PK]

5745MHz

02/07/2025

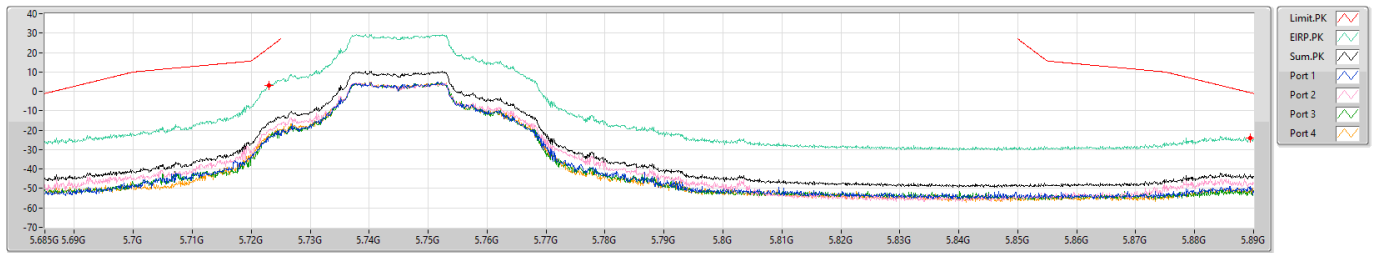


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.685G	5.89G	1M	PK	5.72303G	3.22	22.50	-19.28	19.02	-15.80	-23.63	-19.71	-22.99	-22.04
5.685G	5.89G	1M	PK	5.88949G	-23.88	-0.72	-23.16	19.02	-42.90	-49.09	-47.27	-50.39	-49.56

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Bandedge [PK]

5745MHz

02/07/2025

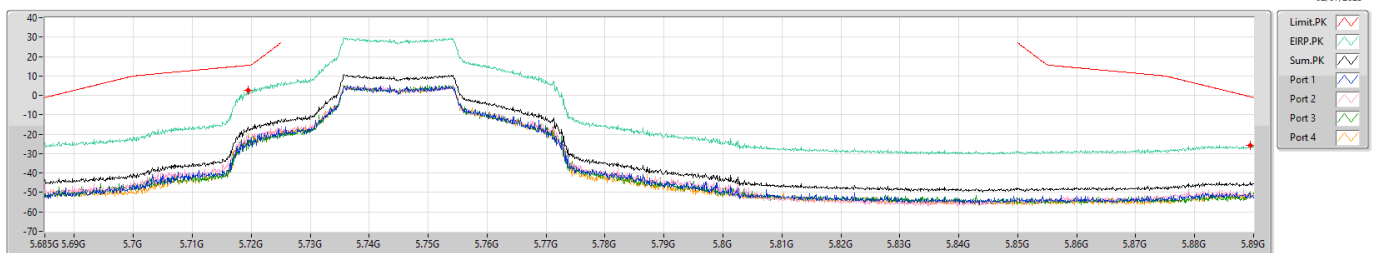


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.685G	5.89G	1M	PK	5.71944G	2.81	15.44	-12.63	19.02	-16.21	-22.75	-22.35	-27.67	-19.55
5.685G	5.89G	1M	PK	5.88949G	-25.70	-0.72	-24.98	19.02	-44.72	-52.70	-51.29	-50.24	-49.41

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Bandedge [PK]

5795MHz

02/07/2025

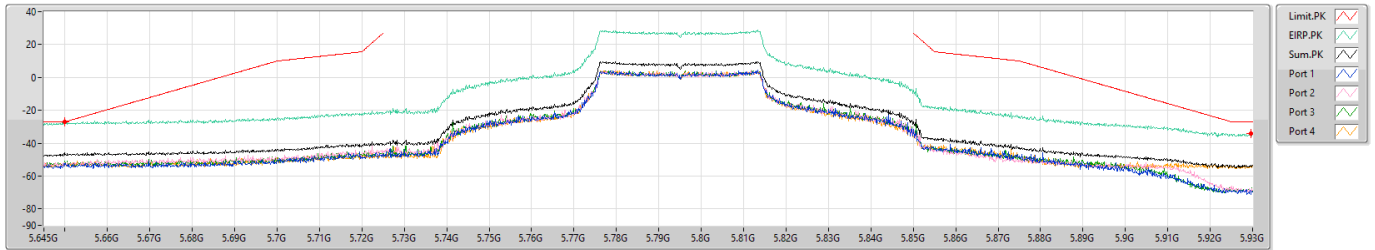


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.645G	5.93G	1M	PK	5.64999G	-27.02	-27.00	-0.02	19.02	-46.04	-52.64	-51.98	-51.00	-52.86
5.645G	5.93G	1M	PK	5.92957G	-34.37	-27.00	-7.37	19.02	-53.39	-70.98	-68.42	-69.31	-53.73

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

CSE Bandedge [PK]

5775MHz

02/07/2025

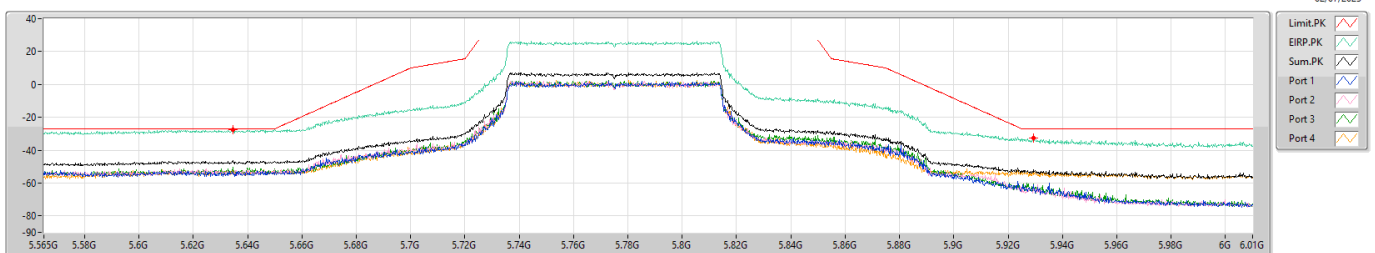

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
5.565G	6.01G	1M	PK	5.63464G	-27.55	-27.00	-0.55	19.02	-46.57	-54.61	-53.77	-50.57	-52.51
5.565G	6.01G	1M	PK	5.92923G	-32.67	-27.00	-5.67	19.02	-51.69	-60.84	-63.63	-60.54	-53.34