




RADIO TEST REPORT

FCC ID : UDX-CW9177I
Equipment : Cisco Wireless 9177D Series Wi-Fi 7 Access Point
Brand Name : CISCO
Model Name : CW9177D
Applicant : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Jan. 05, 2026, and testing was started from Feb. 03, 2026 and completed on Jul. 09, 2026. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

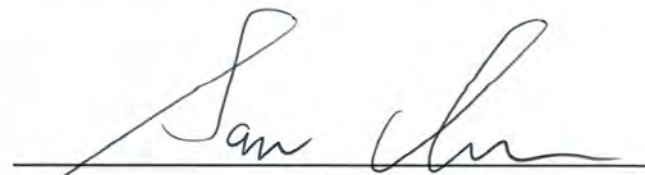
Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	17
1.3 Testing Location Information	17
1.4 Measurement Uncertainty	18
2 Test Configuration of EUT	19
2.1 Test Channel Mode	19
2.2 The Worst Case Measurement Configuration	24
2.3 EUT Operation during Test	27
2.4 Accessories	27
2.5 Support Equipment.....	27
2.6 Test Setup Diagram	29
3 Transmitter Test Result	33
3.1 AC Power-line Conducted Emissions	33
3.2 Emission Bandwidth	35
3.3 Maximum Output Power	36
3.4 Power Spectral Density	39
3.5 Unwanted Emissions.....	42
4 Test Equipment and Calibration Data	47
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Radiated Emission Co-location	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4

Page Number : 3 of 52
Issued Date : Aug. 06, 2026
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.3	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Sophia Shiung



1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5250-5350	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5260-5320	52-64 [4]
5250-5350	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5270-5310	54-62 [2]
5250-5350	ac (VHT80), ax (HEW80), be (EHT80)	5290	58 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]

<Scan Radio 0>

Band	Mode	BWch (MHz)	Nant
5.15-5.35GHz	802.11 ac VHT160, 802.11 ax HEW160	160	2TX/2RX
5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20	20	2TX/2RX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40	40	2TX/2RX
	802.11 ac VHT80, 802.11 ax HEW80	80	2TX/2RX

**<Radio 3>**

Band	Mode	BWch (MHz)	Nant
5.15-5.35GHz	802.11 ac VHT160, 802.11 ax HEW160, 802.11 be EHT160	160	1, 2, 4TX/4RX
	802.11 ac VHT160-BF, 802.11 ax HEW160-BF, 802.11 be EHT160-BF	160	2, 4TX/4RX
5.25-5.35GHz	802.11 a, 802.11 n HT20, 802.11 ac VHT20, 802.11 ax HEW20, 802.11 be EHT20	20	1, 2, 4TX/4RX
	802.11 n HT20-BF, 802.11 ac VHT20-BF, 802.11 ax HEW20-BF, 802.11 be EHT20-BF	20	2, 4TX/4RX
	802.11 n HT40, 802.11 ac VHT40, 802.11 ax HEW40, 802.11 be EHT40	40	1, 2, 4TX/4RX
	802.11 n HT40-BF, 802.11 ac VHT40-BF, 802.11 ax HEW40-BF, 802.11 be EHT40-BF	40	2, 4TX/4RX
	802.11 ac VHT80, 802.11 ax HEW80, 802.11 be EHT80	80	1, 2, 4TX/4RX
	802.11 ac VHT80-BF, 802.11 ax HEW80-BF, 802.11 be EHT80-BF	80	2, 4TX/4RX

MRU (puncturing):
For Multi-RU:

RU-tone	Bandwidth (MHz)			5GHz Test CH
				UNII-2A
	80			CH58
242+242(MCS0)	242		242	V
242+242(MCS4)	242		242	V
484+242(MCS0)	484		242	V
484+242(MCS4)	484		242	V

RU-tone	Bandwidth (MHz)						5GHz Test CH
							UNII-1/2A
	160						CH50
996+484(MCS0)	484				996		V
996+484(MCS4)	484				996		V
484+3x242(MCS0)	484	242		242		242	V
484+3x242(MCS4)	484	242		242		242	V
484+484(MCS0)	484				484		V
484+484(MCS4)	484				484		V

For Puncturing:

RU-tone	Configuration	Bandwidth (MHz)			5GHz Test CH
					UNII-2A
		80			CH58
484+242	1		242	484	V
	2	242		484	V
	3	484		242	V
	4	484	242		--

RU-tone	Configuration	Bandwidth (MHz)						5GHz Test CH
								UNII-1/2A
		160						CH50
996+484	1			484		996		--
	2		484			996		V
	3			996			484	V
	4			996		484		V
996+484+242	1		242	484		996		--
	2	242		484		996		V
	3		484		242	996		V
	4		484		242	996		V
	5			996			242	V
	6			996		242		V
	7			996		484	242	V
	8			996		484	242	V

Note:

- ♦ 11a, HT20, HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80, VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80, HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Worst case of MRU (puncturing) evaluation procedure**

1.	Complete test Full RU BE & PSD.
2.	Measure the PSD of each MRU (puncturing) by conducted method and it is less than the Full RU conducted PSD.
3.	Measure the Band edge emission of each MRU (puncturing) by conducted method and find out the MRU (puncturing) worst case configuration.
4.	Follow step 3 to find the worst MRU (puncturing) configuration and perform radiated BE/RSE testing.
5.	Confirm whether the worst MRU (puncturing) configuration setting in step 3 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU (puncturing) needs to be reduced.

1.1.3 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Cross-polar	Radio (R)
1	WNC	95XPAN15.G13	Dipole	I-Pex	V	R1/3
2	WNC	95XPAN15.G14	Dipole	I-Pex	H	R1/3
3	WNC	95XPAN15.G15	Dipole	I-Pex	V	R1/3
4	WNC	95XPAN15.G16	Dipole	I-Pex	H	R1/3
5	WNC	95XPAN15.G17	Dipole	I-Pex	V	R2
6	WNC	95XPAN15.G18	Dipole	I-Pex	H	R2
7	WNC	95XPAN15.G19	Dipole	I-Pex	V	R2
8	WNC	95XPAN15.G20	Dipole	I-Pex	H	R2
9	WNC	95XPAN15.G21	Dipole	I-Pex	H	R0
10	WNC	95XPAN15.G22	Dipole	I-Pex	V	R0
11	WNC	95XPAN15.G23	PIFA	I-Pex	V	R4
12	WNC	95XPAN15.G12	PIFA	I-Pex	V	R5
13	WNC	81VEAR15.G01	Patch	SMA	V	R5

Ant.	Port / Radio (R)		Composite Gain (dBi)					Ant. Gain above 30 degrees (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 2.4GHz	WLAN 5GHz				WLAN 5GHz
	R1	R3		UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 1
1	1	1	6.6	6.05	6.07	6.48	6.78	1.8
2	2	2	7.82	5.86	6.07	6.44	6.46	0.4
3	3	3	8.06	5.52	5.77	6.54	6.7	2.2
4	4	4	6.2	5.79	6.22	6.49	6.61	1.8

Ant.	Port / Radio (R)		Composite Gain (dBi)					Ant. Gain above 30 degrees (dBi)		
	WLAN 5/6GHz		WLAN 5GHz		WLAN 6GHz			WLAN 6GHz		
	R2		UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7	UNII 5	UNII 6	UNII 7
5	1		5.54	5.95	5.63	5.57	5.81	2.2	2.1	2.1
6	2		6.32	6	5.23	6.38	6.4	0.9	1.1	0.9
7	3		6.53	6.63	7.35	7.9	8.02	0.7	0.2	-0.6
8	4		6.79	7.03	7.46	7.9	8.28	-0.1	-1.3	-1.3

Ant.	Port / Radio (R)	Composite Gain (dBi)							
	WLAN 2.4/5/6GHz	WLAN	WLAN 5GHz				WLAN 6GHz		
	R0	2.4GHz	UNII 1	UNII 2A	UNII 2C	UNII 3	UNII 5	UNII 6	UNII 7
9	1	6.28	6.32	6.45	6.86	7.53	7.43	8.09	8.93
10	2	6.87	6.49	7.06	6.94	7.22	7.74	9.59	9.56

Ant.	Port / Radio (R)		Ant. Gain above 30 degrees (dBi)			
	WLAN 2.4/5/6GHz		WLAN 5GHz	WLAN 6GHz		
	R0		UNII 1	UNII 5	UNII 6	UNII 7
9	1		0.9	-0.9	-2.2	-2.8
10	2		1	0.4	-2	-1.8



Ant.	Port / Radio (R)		Gain (dBi)	
	BT / IEEE 802.15.4	GPS	BT / IEEE 802.15.4	GPS
	R4	R5		
11	1	-	3.4	-
12	-	1	-	3.3
13	-	1	-	2.98

Note 1: The above information was declared by manufacturer.

Note 2: States antenna 6GHz transmission will be restricted per country's regulation.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 2TX:

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ;$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2))^2 / N_{ANT}] \Rightarrow 10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$$

For 4TX:

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,3) = 10^{G3/20} ; NSS1(g1,4) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where;

Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
0	2.4GHz	2TX	6.28	6.87	-	-	6.87	Cross-Polarized Antenna
	5GHz UNII-1	2TX	6.32	6.49	-	-	6.49	
	5GHz UNII-2A	2TX	6.45	7.06	-	-	7.06	
	5GHz UNII-2C	2TX	6.86	6.94	-	-	6.94	
	5GHz UNII-3	2TX	7.53	7.22	-	-	7.53	
	6GHz UNII-5	2TX	7.43	7.74	-	-	7.74	
	6GHz UNII-6	2TX	8.09	9.59	-	-	9.59	
	6GHz UNII-7	2TX	8.93	9.56	-	-	9.56	



Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
1	2.4GHz	2TX	6.60	7.82	-	-	7.82	Cross-Polarized Antenna
		4TX	6.60	7.82	8.06	6.20	10.25	
2	5GHz UNII-2C	2TX	5.54	6.32	-	-	6.32	
		4TX	5.54	6.32	6.53	6.79	9.33	
	5GHz UNII-3	2TX	5.95	6.00	-	-	6.00	
		4TX	5.95	6.00	6.63	7.03	9.44	
	6GHz UNII-5	2TX	5.63	5.23	-	-	5.63	
		4TX	5.63	5.23	7.35	7.46	9.54	
	6GHz UNII-6	2TX	5.57	6.38	-	-	6.38	
		4TX	5.57	6.38	7.90	7.90	10.06	
	6GHz UNII-7	2TX	5.81	6.40	-	-	6.40	
		4TX	5.81	6.40	8.02	8.28	10.26	
3	5GHz UNII-1	2TX	6.05	5.86	-	-	6.05	
		4TX	6.05	5.86	5.52	5.79	8.82	
	5GHz UNII-2A	2TX	6.07	6.07	-	-	6.07	
		4TX	6.07	6.07	5.77	6.22	9.05	
	5GHz UNII-2C	2TX	6.48	6.44	-	-	6.48	
		4TX	6.48	6.44	6.54	6.49	9.50	
	5GHz UNII-3	2TX	6.78	6.46	-	-	6.78	
		4TX	6.78	6.46	6.70	6.61	9.65	

For Antenna Gain above 30 degrees:

Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
2	6G UNII-5	2TX	2.20	0.90	-	-	2.20	Cross-Polarized Antenna
		4TX	2.20	0.90	0.70	-0.10	4.00	
	6G UNII-6	2TX	2.10	1.10	-	-	2.10	
		4TX	2.10	1.10	0.20	-1.30	3.69	
	6G UNII-7	2TX	2.10	0.90	-	-	2.10	
		4TX	2.10	0.90	-0.60	-1.30	3.47	
3	5G UNII-1	2TX	1.80	0.40	-	-	1.80	
		4TX	1.80	0.40	2.20	1.80	4.60	

Note 4: <Scan Radio 0>

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax (2TX/2RX):

Port 1~2 can be used as transmitting/receiving antenna.

Port 1~2 could transmit/receive simultaneously.

**<Radio 1>****For 2.4GHz function:****For IEEE 802.11 b/g/n/VHT/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 2>**For 5GHz function:****For IEEE 802.11 a/n/ac/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

For 6GHz function:**For IEEE 802.11 ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.



<Radio 3>

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be (1TX, 2TX, 4TX/4RX):

1TX:

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 4>

For Bluetooth function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

For IEEE 802.15.4 function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

<Radio 5>

For GPS function (1RX):

Ant. 12~13 can be used as receiving antenna, but only one of them will be used at one time.

**1.1.4 Mode Test Duty Cycle**

<Scan Radio 0>

Indoor use:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a	0.948	0.23	2m	1k
802.11ax HEW20	0.811	0.91	5.475m	300
802.11ax HEW40	0.811	0.91	5.475m	300
802.11ax HEW80	0.811	0.91	5.475m	300
802.11ax HEW160	0.813	0.9	5.475m	300

Outdoor use:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11ax HEW160	0.813	0.9	5.475m	300

<Radio 3>

Full RU Indoor use:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a	0.992	0.03	1.977m	10Hz (DC>=0.98)
802.11be EHT20	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT160	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT20-BF	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT40-BF	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT80-BF	0.997	0.01	5.453m	10Hz (DC>=0.98)
802.11be EHT160-BF	0.997	0.01	5.454m	10Hz (DC>=0.98)

Full RU Outdoor use 1TX:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT160	0.997	0.01	5.454m	10Hz (DC>=0.98)

Full RU Outdoor use 2TX:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT160	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT160-BF	0.997	0.01	5.454m	10Hz (DC>=0.98)

Full RU Outdoor use 4TX:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT160	0.997	0.01	5.454m	10Hz (DC>=0.98)
802.11be EHT160-BF	0.997	0.01	5.454m	10Hz (DC>=0.98)

**Multi-RU:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11be EHT80_Nss 1,(M0),RU484+RU242	0.919	0.37	2.744m	500
802.11be EHT80_Nss 1,(M0),RU242+RU242	0.913	0.4	2.744m	500
802.11be EHT160_Nss 1,(M0),RU996+RU484	0.822	0.85	1.421m	1k
802.11be EHT160_Nss 1,(M0),RU484+3xRU242	0.855	0.68	1.421m	1k
802.11be EHT160_Nss 1,(M0),RU484+RU484	0.799	0.97	1.421m	1k

Puncturing:

Mode	DC	DCF (dB)	T (s)	VBW (Hz) 1/T
802.11be EHT80_Nss 1,(M0),RU484+RU242	0.98	0.09	5.453m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0),RU996+RU484+RU242	0.983	0.07	5.453m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0),RU996+RU484	0.983	0.07	5.453m	10Hz (DC>=0.98)

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

1.1.5 EUT Operational Condition

EUT Power Type	From PoE, adapter or DC power supply (24~56Vdc)			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz for Radio 1, n/ac/ax/be in 5GHz for Radio 2/3 and ax/be in 6GHz for Radio 2.			
Function	☒	Outdoor P2M	☒	Indoor P2M
	☐	Fixed P2P	☐	Client
	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☒	With TPC	☐	Without TPC
Channel Puncturing Function	☒	Supported for Radio 3		
	☒	Unsupported for Radio 0		
Support RU	☒	Full RU for Radio 0, 3	☒	Partial RU for Radio 3
Test Software Version	QSPR x86.exe V6.00.00231.1 & QRCT4 V4.0193.1			
Serial Number	For Others: WTT294903TQ For AC Conduction and Radiated below 1GHz tests: WTT294903U0			

Note: The above information was declared by manufacturer.

1.1.6 Table for SW Information

SW	BW of 5GHz Mode (MHz)	6GHz Mode	Support Function
Catalyst	20/40/80/160	Standard Power Access Point.	AP
			CURWB P2MP Master
		-	CURWB P2MP client with radar detection
Meraki	20/40/80	Standard Power Access Point.	AP

Note 1: The SW Catalyst_AP mode was tested and recorded in this test report.

Note 2: The above information was declared by manufacturer.

1.1.7 Table for Radio Function

Radio (R)	Support Function	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz	BT / IEEE 802.15.4	GPS
			UNII 1~2A	UNII 2C~3			
R0 (Scan Radio)	AP	✓	✓	✓	✓	-	-
	CURWB P2MP Master	-	✓	✓	✓	-	-
	CURWB P2MP client with radar detection	-	✓	✓	-	-	-
R1	AP	✓	-	-	-	-	-
R2	AP & CURWB P2MP Master	-	-	✓	✓	-	-
	CURWB P2MP client with radar detection	-	-	✓	-	-	-
R3 (Note 1)	AP, CURWB P2MP Master & CURWB P2MP client with radar detection	-	✓	✓	-	-	-
R4	AP	-	-	-	-	✓	-
R5	AP	-	-	-	-	-	✓

Note 1: Radio 3 supports operation in 5GHz full band (UNII 1~3) or low band (UNII 1~2A).

Note 2: For WLAN 2.4GHz, R0 and R1 can't operate at the same frequency simultaneously.

For WLAN 5GHz, R0, R2 and R3 can't operate at the same frequency simultaneously.

For WLAN 6GHz, R0 and R2 can't operate at the same frequency simultaneously.

Note 3: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information				
Test Lab. : Sporton International Inc. Hsinchu Laboratory				
Hsinchu ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)				
(TAF: 3787) TEL: 886-3-656-9065 FAX: 886-3-656-9085				
Test site Designation No. TW3787 with FCC.				
Conformity Assessment Body Identifier (CABID) TW3787 with ISCED.				

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH02-CB	Ken Yeh	23.6~24.8 / 61~64	Feb. 18, 2026~ Jun. 13, 2026
Radiated < 1GHz	10CH01-CB	Stim Sung	23~24 / 56~57	Jun. 17, 2026~ Jul. 09, 2026
Radiated > 1GHz (Other tests: For R0)	03CH02-CB	Paul Hu	23.6~24.7 / 59~61	Feb. 03, 2026~ Jul. 06, 2026
	03CH06-CB	Jimmy Huang	24.4~24.6 / 55~58	
Radiated > 1GHz (Other tests: For R3_Full RU)	03CH02-CB	Paul Hu	24.2~24.3 / 58~65	
	03CH03-CB	George Fan	23.7~24.0 / 58~68	
	03CH04-CB	Stim Sung	23.8~24.8 / 60~63	
	03CH05-CB	Lex Lee	23.9~24.9 / 68~69	
	03CH06-CB	Jimmy Huang	23.7~25.0 / 57~61	
Radiated > 1GHz (Other tests: For R3_Multi-RU)	03CH01-CB	Sean Ku	23.9~24.7 / 61~66	
	03CH05-CB	Lex Lee	24.6~25.0 / 60~69	
Radiated > 1GHz (Other tests: For R3_Puncturing)	03CH01-CB	Sean Ku	23.8~24.3 / 57~60	
	03CH04-CB	Stim Sung	24.2~24.3 / 67~68	
Radiated > 1GHz (Co-location)	03CH05-CB	Lex Lee	23.8~24.6 / 56~62	
AC Conduction	CO01-CB	Allen Chung	21~22 / 57~58	Jun. 15, 2026~ Jul. 06, 2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Date: Before May 28, 2026

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.0 dB	Confidence levels of 95%
Bandwidth Measurement	1.0 %	Confidence levels of 95%

Test Date: May 28, 2026~Jun. 30, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	3.8 dB	Confidence levels of 95%
Output Power Measurement	1.5 dB	Confidence levels of 95%
Power Density Measurement	3.5 dB	Confidence levels of 95%
Bandwidth Measurement	1.6 %	Confidence levels of 95%

Test Date: After Jun. 30, 2026

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.3 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

<Scan Radio 0>

Indoor use:

Mode
802.11a_Nss1,(6Mbps)_2TX
5260MHz
5300MHz
5320MHz
802.11ax HEW20_Nss1,(MCS0)_2TX
5260MHz
5300MHz
5320MHz
802.11ax HEW40_Nss1,(MCS0)_2TX
5270MHz
5310MHz
802.11ax HEW80_Nss1,(MCS0)_2TX
5290MHz
802.11ax HEW160_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

Outdoor use:

Mode
802.11ax HEW160_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

**<Radio 3>****Full RU_Indoor use:**

Mode
802.11a_Nss1,(6Mbps)_1TX
5260MHz
5300MHz
5320MHz
802.11be EHT20_Nss1,(MCS0)_1TX
5260MHz
5300MHz
5320MHz
802.11be EHT40_Nss1,(MCS0)_1TX
5270MHz
5310MHz
802.11be EHT80_Nss1,(MCS0)_1TX
5290MHz
802.11be EHT160_Nss1,(MCS0)_1TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11a_Nss1,(6Mbps)_2TX
5260MHz
5300MHz
5320MHz
802.11be EHT20_Nss1,(MCS0)_2TX
5260MHz
5300MHz
5320MHz
802.11be EHT40_Nss1,(MCS0)_2TX
5270MHz
5310MHz
802.11be EHT80_Nss1,(MCS0)_2TX
5290MHz
802.11be EHT160_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11a_Nss1,(6Mbps)_4TX
5260MHz
5300MHz
5320MHz
802.11be EHT20_Nss1,(MCS0)_4TX
5260MHz
5300MHz
5320MHz
802.11be EHT40_Nss1,(MCS0)_4TX
5270MHz
5310MHz
802.11be EHT80_Nss1,(MCS0)_4TX
5290MHz
802.11be EHT160_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz



Mode
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5260MHz
5300MHz
5320MHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5270MHz
5310MHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5290MHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5260MHz
5300MHz
5320MHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5270MHz
5310MHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX
5290MHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

Full RU Outdoor use 1TX:

Mode
802.11be EHT160_Nss1,(MCS0)_1TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

Full RU Outdoor use 2TX:

Mode
802.11be EHT160_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

Full RU Outdoor use 4TX:

Mode
802.11be EHT160_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

**Multi-RU:**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5290MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX
5290MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5290MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
5290MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX
5290MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX
5290MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX
5250MHz Straddle 5.15-5.25GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX
5250MHz Straddle 5.25-5.35GHz

**Puncturing:**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX
5290MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX
5290MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX
5290MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX
5250MHz Straddle 5.15-5.25GHz
5250MHz Straddle 5.25-5.35GHz

Note:

- ♦ For Radio 0: HEW20 / HEW40 / HEW80 / HEW160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 is the same or lower than HEW20 / HEW40 / HEW80 / HEW160.
- ♦ For Radio 3: EHT20 / EHT40 / EHT80 / EHT160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ For Radio 3: The EUT supports non-beamforming and beamforming modes. After evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	EUT + PoE_R0: 2.4GHz
2	EUT + Adapter_R0: 2.4GHz
3	EUT + DC power supply_R0: 2.4GHz
Mode 3 has been evaluated to be the worst case among Mode 1~3, so the measurement for Mode 4~11 will follow this same test mode.	
4	EUT + DC power supply_R0: 5GHz
5	EUT + DC power supply_R0: 6GHz
6	EUT + DC power supply_R1: 2.4GHz
7	EUT + DC power supply_R2: 5GHz
8	EUT + DC power supply_R2: 6GHz
9	EUT + DC power supply_R3: 5GHz
10	EUT + DC power supply_R4: BT
11	EUT + DC power supply_R4: IEEE 802.15.4
For operating, mode 11 is the worst case and it was record in this test report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Output Power
Test Condition	Conducted measurement at transmit chains
Operating Mode	1 R0_Indoor use
	2 R0_Outdoor use
	3 R3_Full RU_Indoor use
	4 R3_Full RU_Outdoor use_1TX
	5 R3_Full RU_Outdoor use_2TX
	6 R3_Full RU_Outdoor use_4TX



The Worst Case Mode for Following Conformance Tests		
Tests Item	Power Spectral Density	
Test Condition	Conducted measurement at transmit chains	
Operating Mode	1	R0_Indoor use
	2	R0_Outdoor use
	3	R3_Full RU_Indoor use
	4	R3_Full RU_Outdoor use_1TX
	5	R3_Full RU_Outdoor use_2TX
	6	R3_Full RU_Outdoor use_4TX
	7	R3_Multi-RU
	8	R3_Puncturing

The Worst Case Mode for Following Conformance Tests		
Tests Item	Unwanted Emissions	
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.	
Operating Mode < 1GHz	CTX	
	“EUT in Z axis” for R4: BT and “EUT in Y axis” for others generated the worst cases at Radiated measurement above 1GHz. Consequently, the measurement will follow these same test modes.	
	1	EUT in Y axis + PoE_R0: 2.4GHz
	2	EUT in Y axis + Adapter_R0: 2.4GHz
	3	EUT in Y axis + DC power supply_R0: 2.4GHz
Mode 1 has been evaluated to be the worst case among Mode 1~3, so the measurement for Mode 4~11 will follow this same test mode.		
	4	EUT in Y axis + PoE_R0: 5GHz
	5	EUT in Y axis + PoE_R0: 6GHz
	6	EUT in Y axis + PoE_R1: 2.4GHz
	7	EUT in Y axis + PoE_R2: 5GHz
	8	EUT in Y axis + PoE_R2: 6GHz
	9	EUT in Y axis + PoE_R3: 5GHz
	10	EUT in Z axis + PoE_R4: BT
	11	EUT in Y axis + PoE_R4: IEEE 802.15.4
For operating, mode 10 is the worst case and it was record in this test report.		



Operating Mode > 1GHz	CTX
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis_R0
2	EUT in Y axis_R3_Full RU
3	EUT in Y axis_R3_Multi-RU
4	EUT in Y axis_R3_Puncturing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
	"EUT in Y axis" generated the worst case at Radiated measurement above 1GHz. Consequently, the measurement will follow this same test mode.
1	EUT in Y axis_R1: 2.4GHz + R3: 5GHz
Refer to Appendix F for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	R0: 2.4GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: BT
2	R0: 2.4GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: IEEE 802.15.4
3	R0: 5GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: BT
4	R0: 5GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: IEEE 802.15.4
5	R0: 6GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: BT
6	R0: 6GHz + R1: 2.4GHz + R2: 6GHz + R3: 5GHz UNII 1~3 + R4: IEEE 802.15.4
7	R0: 2.4GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: BT
8	R0: 2.4GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: IEEE 802.15.4
9	R0: 5GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: BT
10	R0: 5GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: IEEE 802.15.4
11	R0: 6GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: BT
12	R0: 6GHz + R1: 2.4GHz + R2: 5GHz + R3: 5GHz UNII 1~2A + R4: IEEE 802.15.4
Refer to Sporton Test Report No.: FA5D2458AB for Co-location RF Exposure Evaluation.	



Note: The PoEs and adapter were for measurement only and would not be marketed. Their information is listed below:

Equipment	Brand Name	Model Name
PoE 1	DELTA	ADH-65AR P
PoE 2	CISCO	POEO75U-1BT-C-R
Adapter	MW	GS60A48-CIS5UGS60A48-CIS5

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Accessories
M25 cap*4
DC jack cap*1
SMA Sealed cap*1
M25 RJ-45 Cable gland*2
Bracket (Optional)*1

2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Power Supply	MOTECH	LPS-305	N/A
B	Notebook	DELL	E6430	N/A

For Radiated < 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	CISCO	POE75U-1BT-C-R	N/A
B	Notebook	DELL	E6430	N/A

**For Radiated > 1GHz (Other tests):**

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 1	DELTA	ADH-65AR P	N/A
B	Notebook	Lenovo	L440	N/A


For Radiated > 1GHz (Co-location):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 2	CISCO	POEO75U-1BT-C-R	N/A
B	Notebook	Lenovo	L440	N/A
C	WLAN module	Intel	BE200NGW	PD9BE200NG
D	WLAN module	Intel	BE200NGW	PD9BE200NG

For RF Conducted:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	Lenovo	L440	N/A
B	PoE 1	DELTA	ADH-65AR P	N/A

2.6 Test Setup Diagram

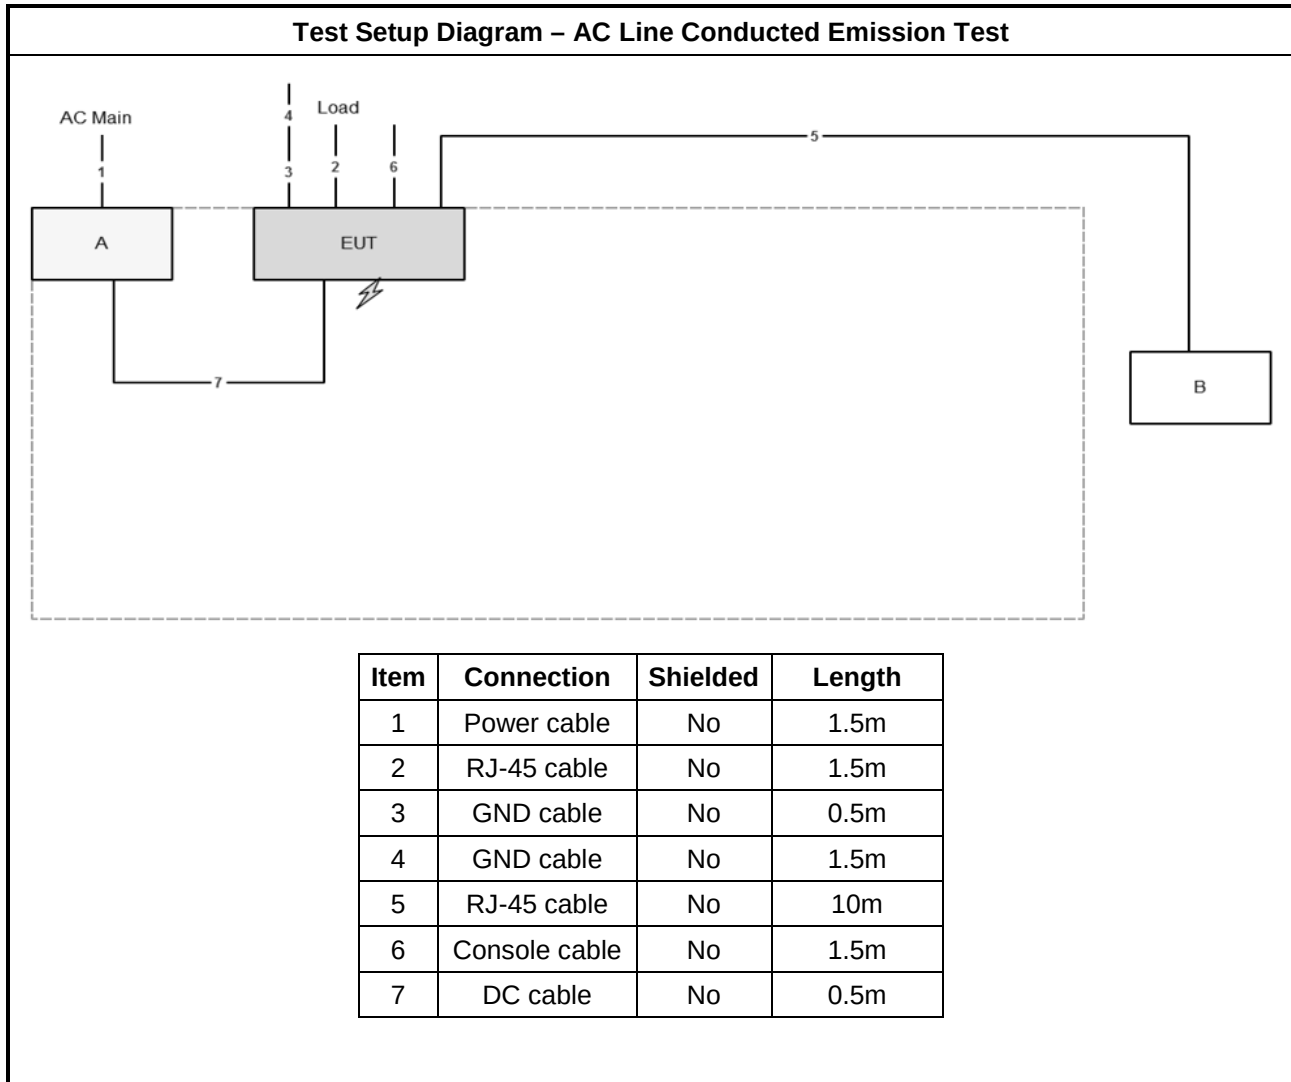


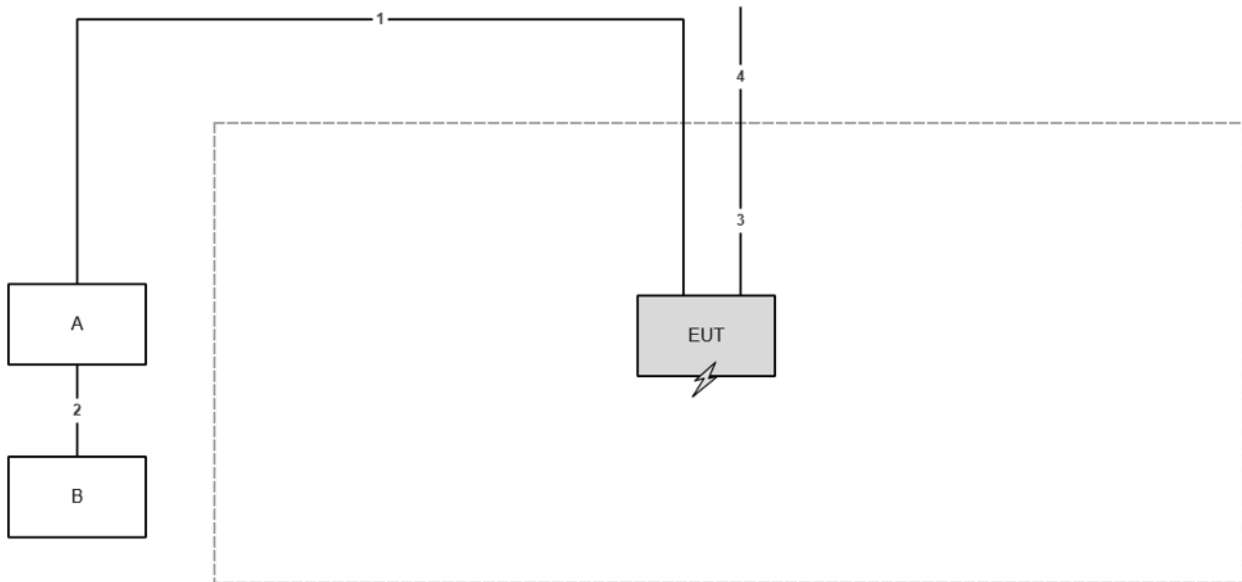Test Setup Diagram - Radiated Test < 1GHz


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	GND cable	No	0.5m
4	GND cable	No	1.5m

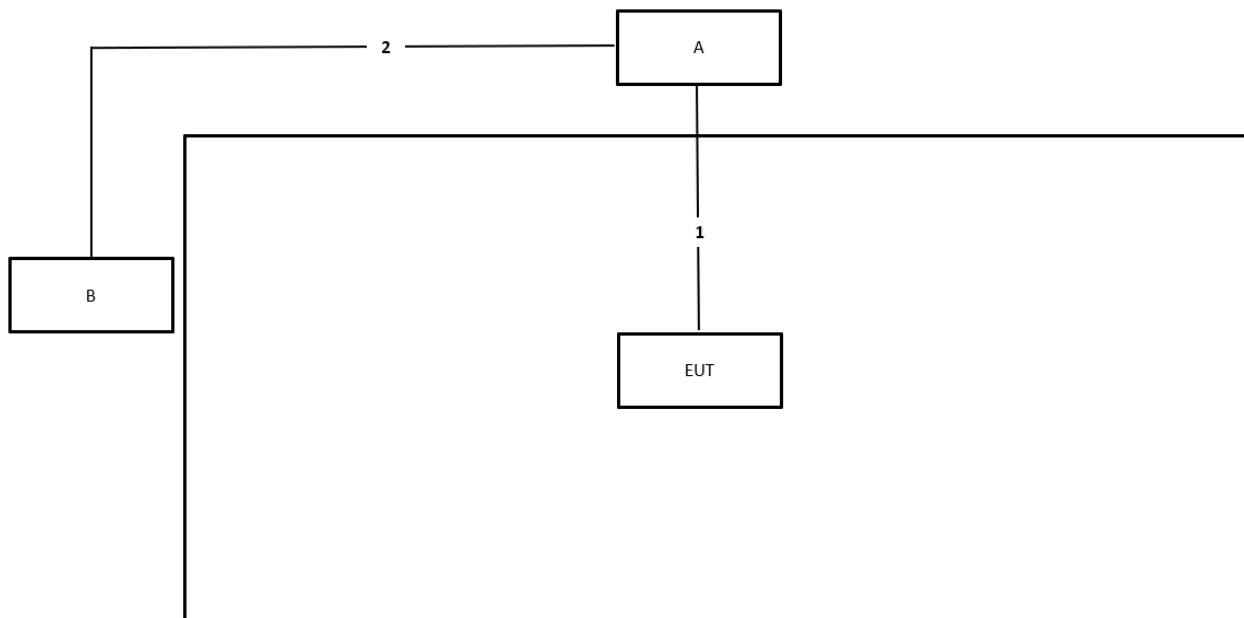Test Setup Diagram - Radiated Test > 1GHz (Other tests)


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m

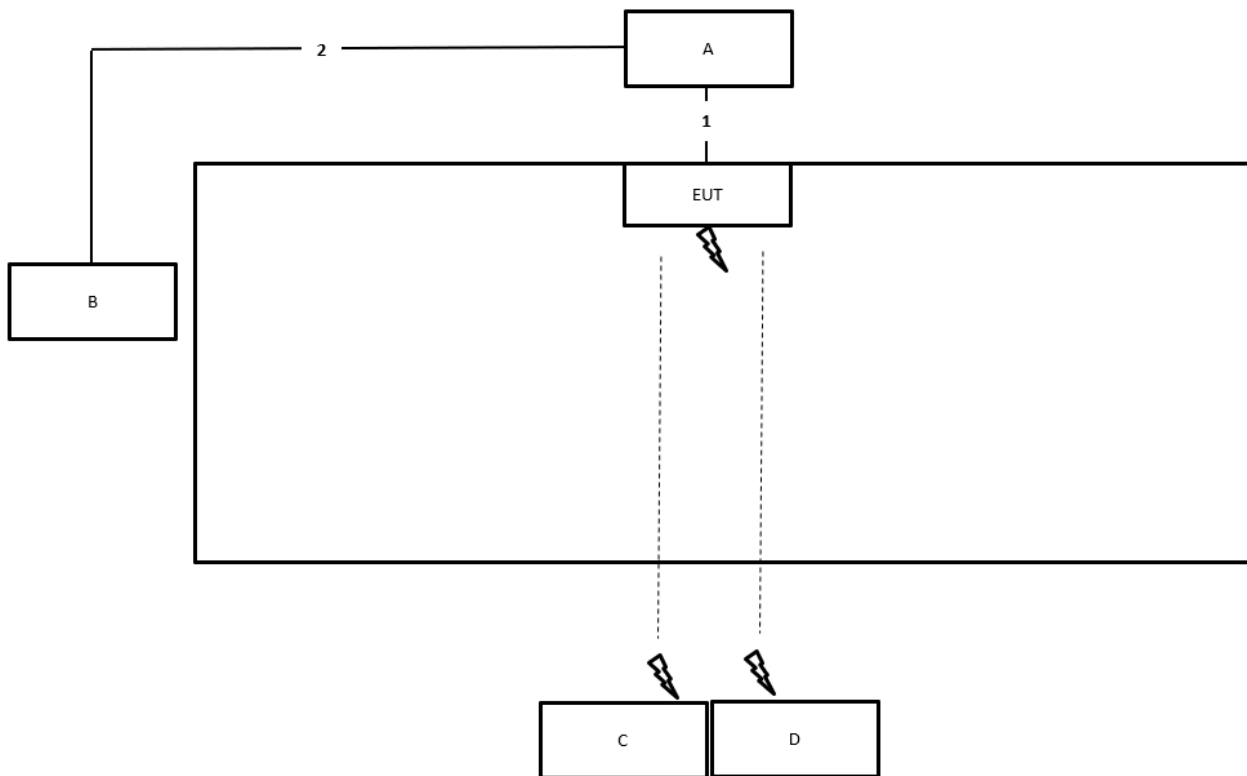Test Setup Diagram - Radiated Test > 1GHz (Co-location)


Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2020, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

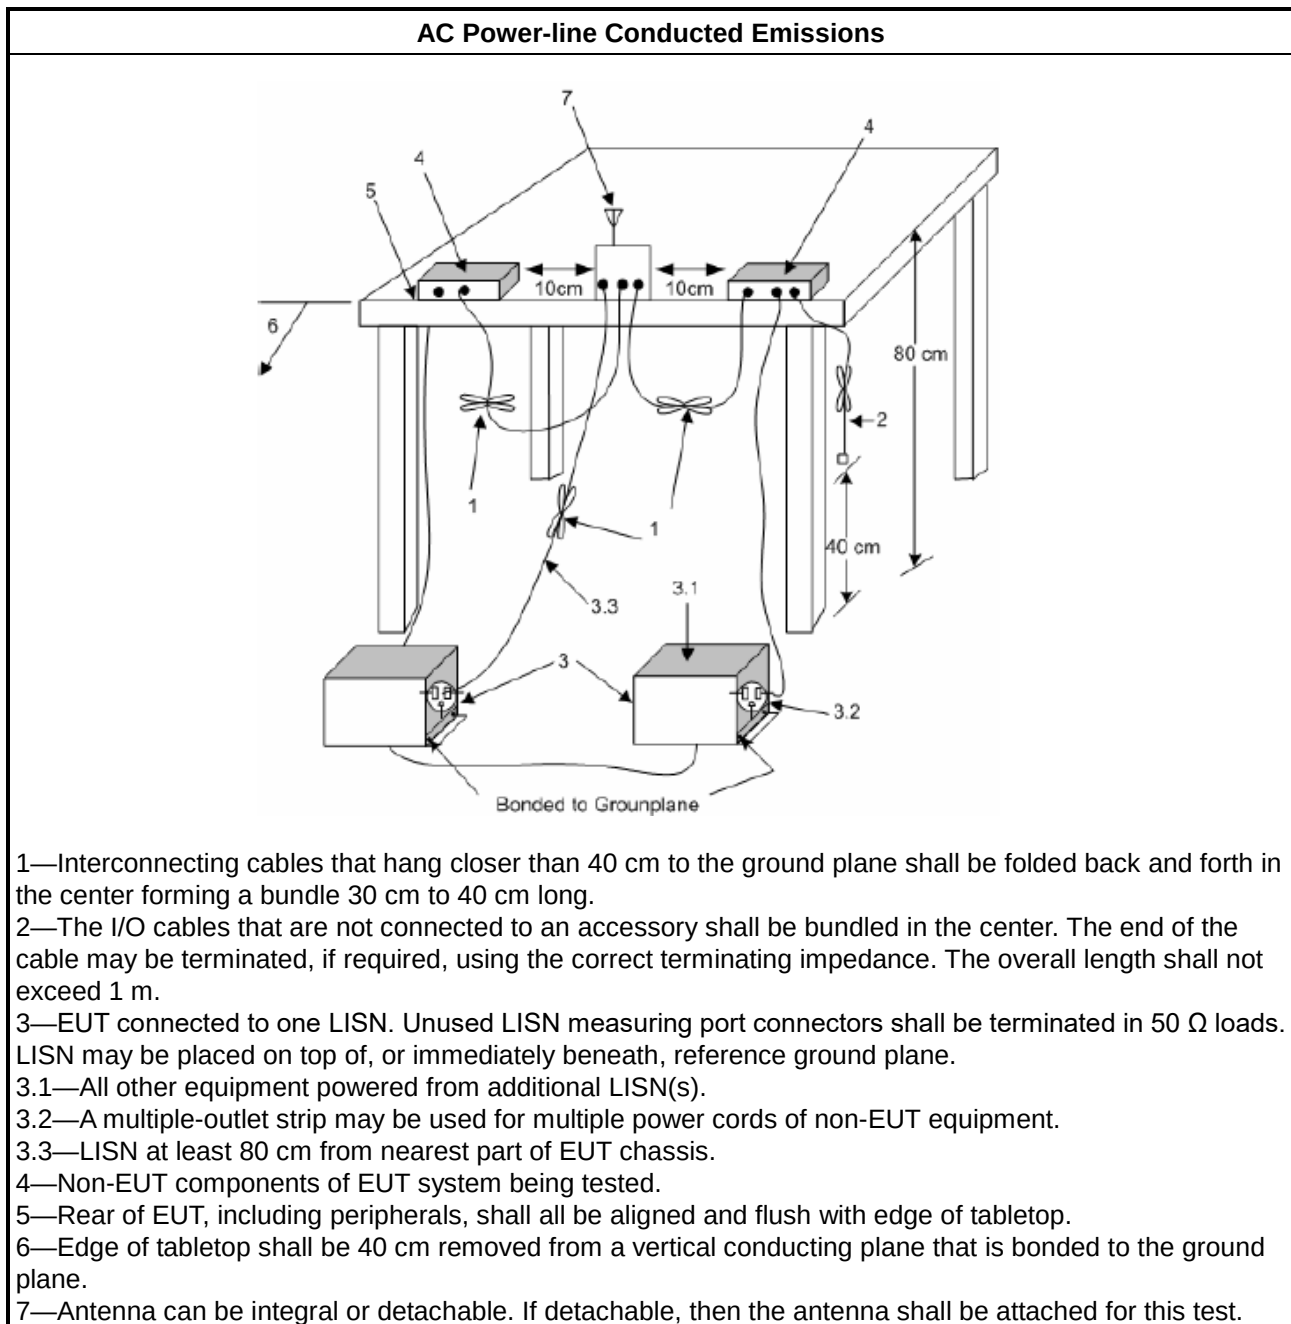

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☐	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth $\geq 500\text{kHz}$.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq 500\text{kHz}$.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

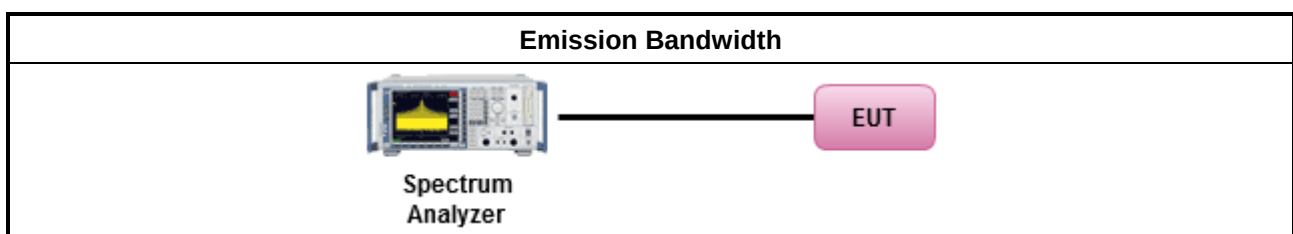

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm] - Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ - Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$. - Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
☐	- For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
☐	- For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz - Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.



☐	For the 5.47-5.725 GHz band:
	- The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10 B$, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. - Equipment with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.
☐	For the 5.725-5.85 GHz band:
	- Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
Maximum Output Power	
	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For Straddle Channels:

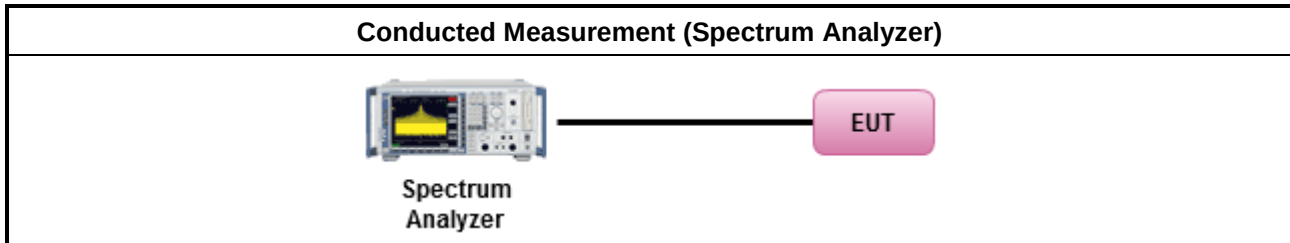

For others:

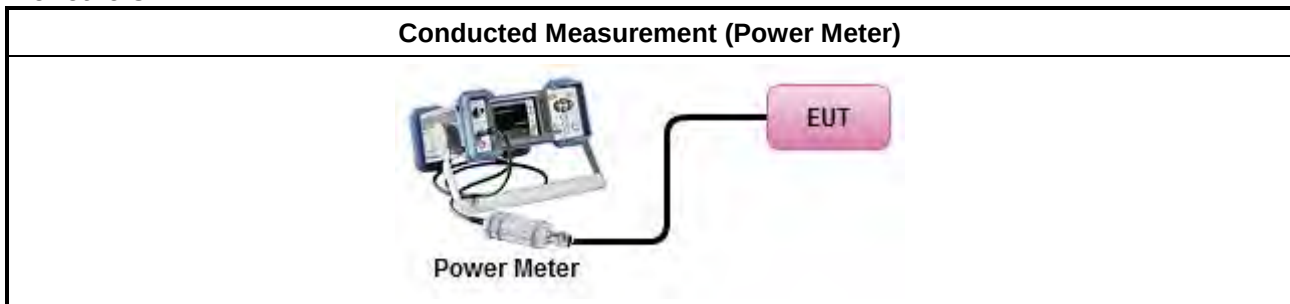

3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	- Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$. - Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$. - Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ-8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ-40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
☐	- Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$. - Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

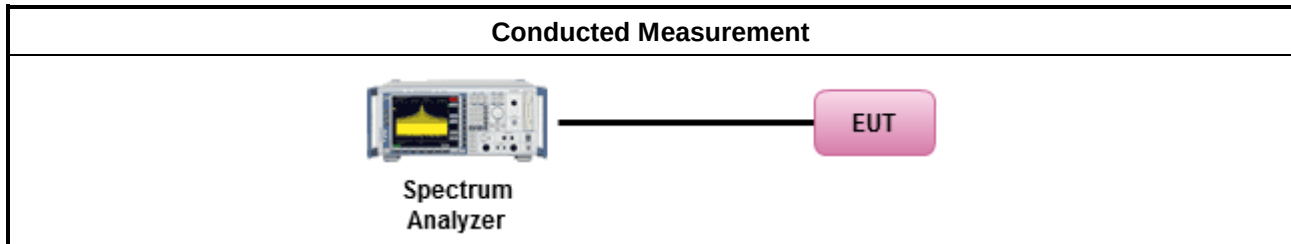

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☐ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☐ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).




3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	


3.5.4 Test Setup

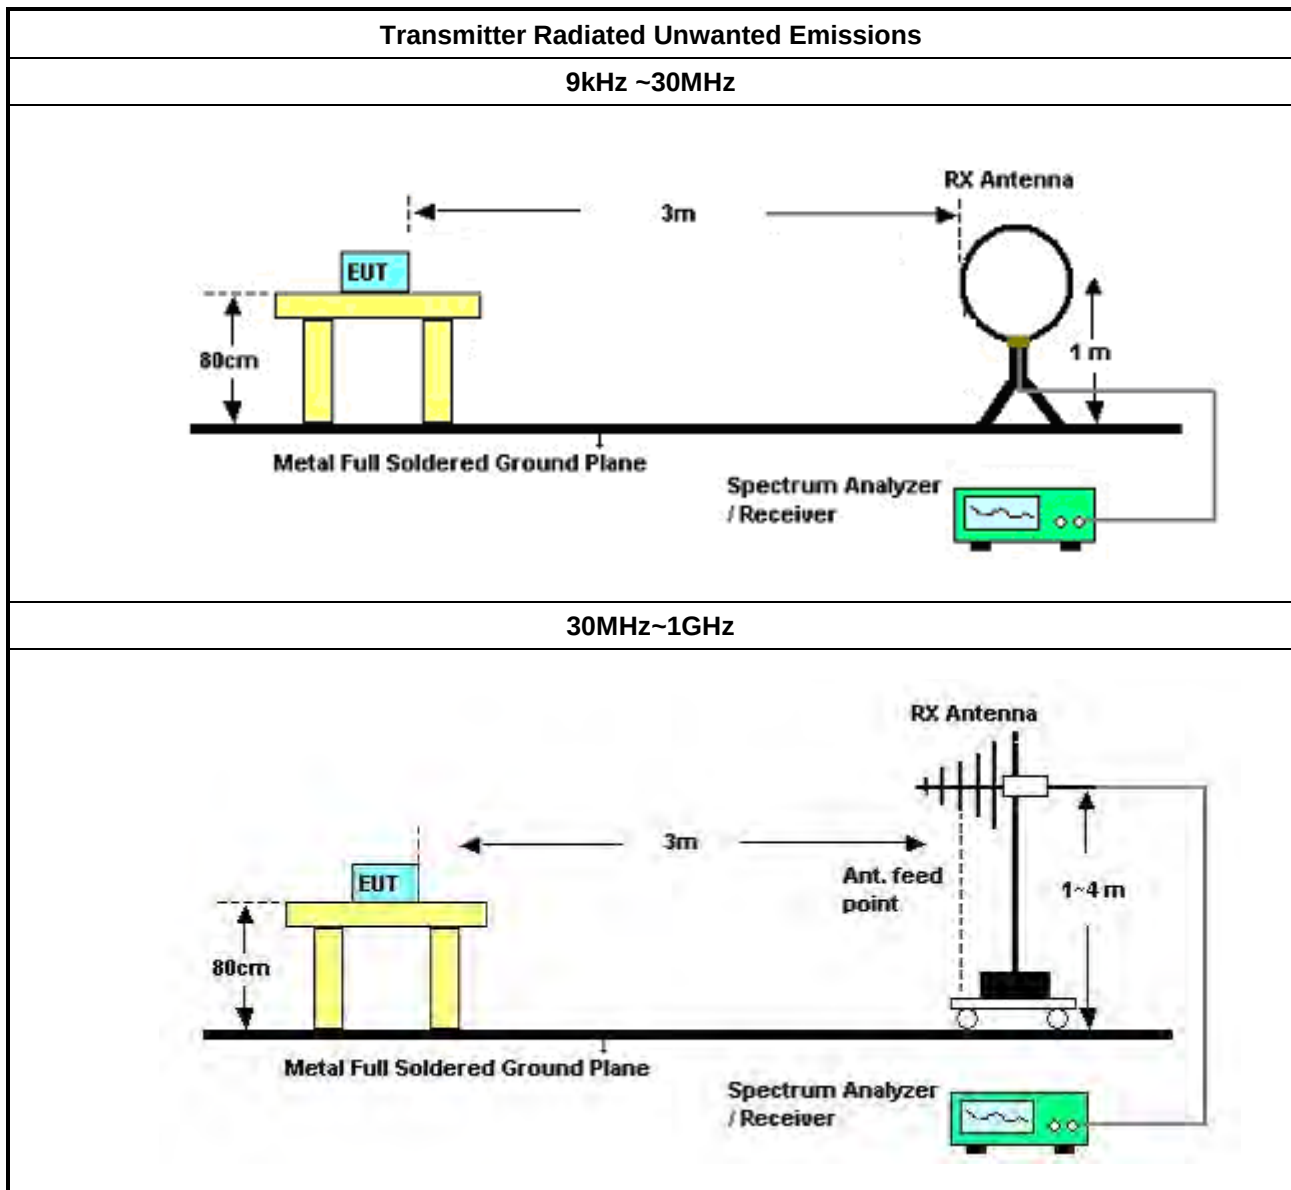


Above 1GHz


Co-location

1,000~18,000 MHz

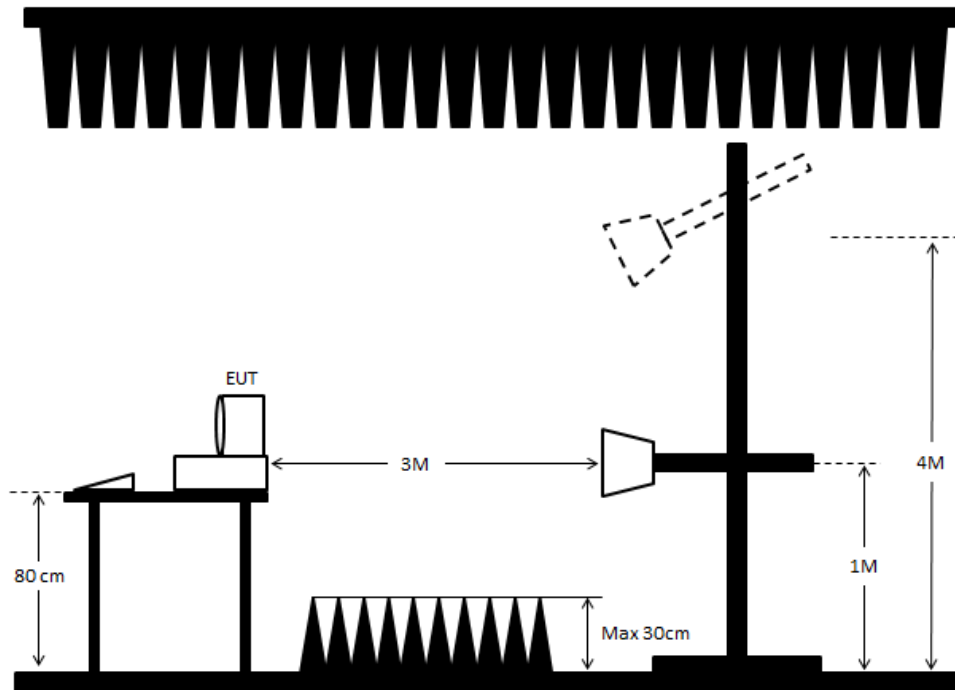

18,000~40,000 MHz

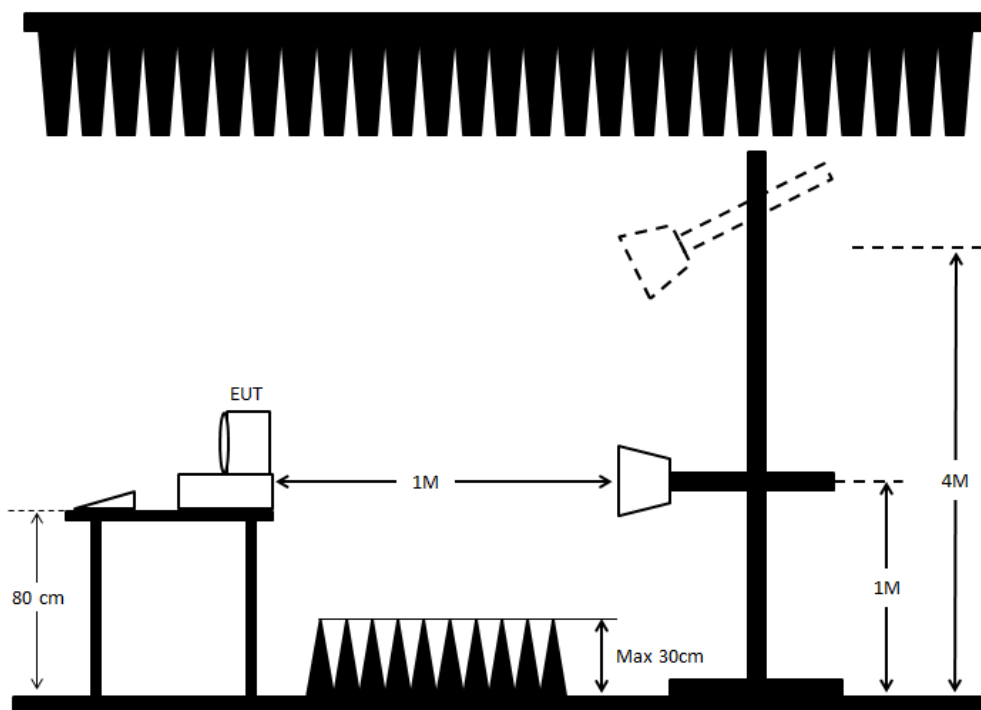

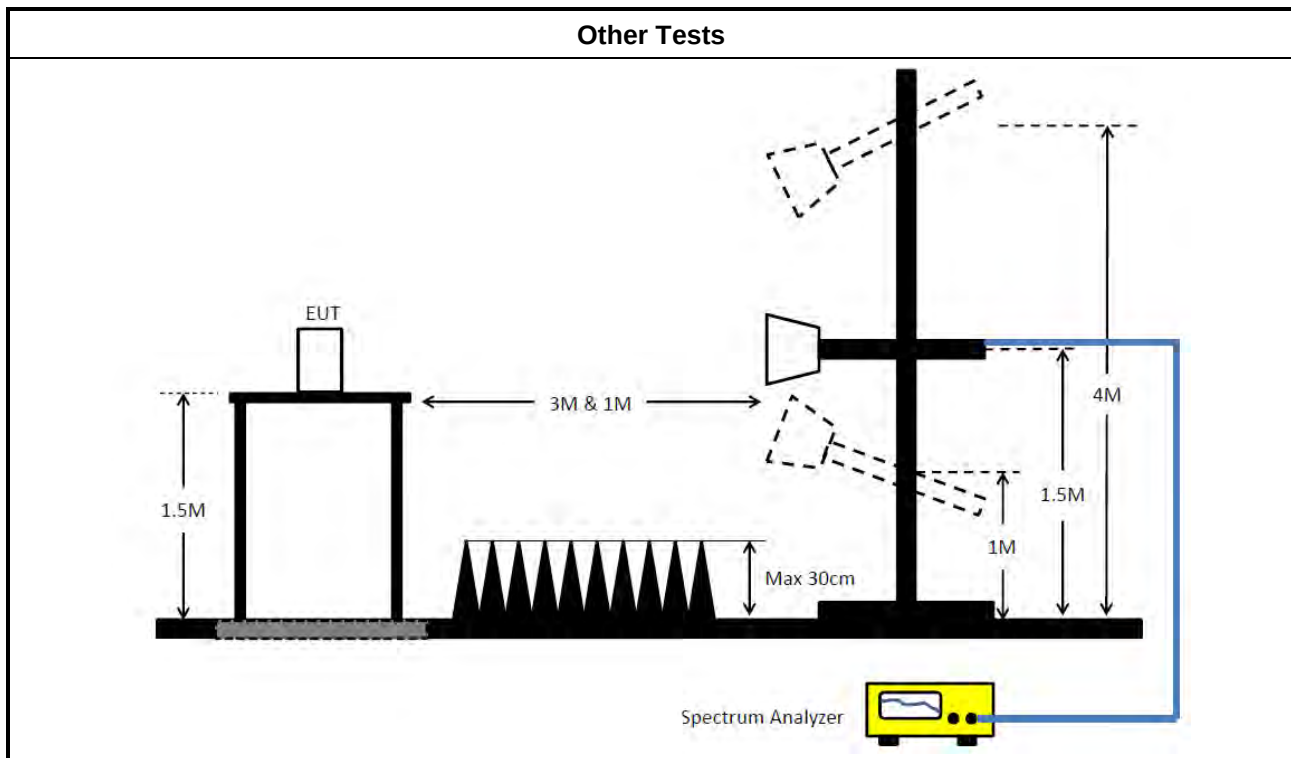

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 12, 2026	Mar. 11, 2027	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 04, 2026	Feb. 03, 2027	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 10, 2026	Apr. 09, 2027	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
COND Cable	Woken	Cable	CO01	9kHz ~ 30MHz	Sep. 14, 2025	Sep. 13, 2026	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 14, 2026	Jan. 13, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 07, 2026	Mar. 06, 2027	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 14, 2025	Oct. 13, 2026	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESR7	103076	9 kHz ~ 7GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (10CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Sep. 03, 2025	Sep. 02, 2026	Radiation (10CH01-CB)
High Cable	TITAN	T318E	High cable01	30MHz ~ 18GHz	Nov. 14, 2025	Nov. 13, 2026	Radiation (10CH01-CB)
Bilog Ant & 6dB Attenuator	SCHWARZBECK & EMCI	VULB 9168 & N-6-06	1469 & AT-N06021	30MHz ~ 1GHz	Jan. 08, 2026	Jan. 07, 2027	Radiation (10CH01-CB)
Amplifier	EM	EM101	060703	10MHz ~ 1GHz	Oct. 15, 2025	Oct. 14, 2026	Radiation (10CH01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 20, 2025	Oct. 19, 2026	Radiation (10CH01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 03, 2025	May 02, 2026	Radiation (03CH01-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH01-CB	1GHz ~18GHz 3m	May 02, 2026	May 01, 2027	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 16, 2025	May 15, 2026	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02121	1GHz ~ 26.5GHz	May 15, 2026	May 14, 2027	Radiation (03CH01-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH01-CB)
Signal Analyzer	R&S	FSV3044	101437	10kHz ~ 44GHz	Dec. 12, 2025	Dec. 11, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH01-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH01-CB)
Test Software	SPORTON	SENSE-15407 _NII	V5.11. 27	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Radiation (03CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 23, 2025	Mar. 22, 2026	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 21, 2026	Mar. 20, 2027	Radiation (03CH02-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~ 18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH02-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH02-CB)
Signal Analyzer	R&S	FSV3044	101536	10kHz ~ 44GHz	Aug. 20, 2025	Aug. 19, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Jun. 18, 2026	Jun. 17, 2027	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 19, 2025	Jun. 18, 2026	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Jun. 18, 2026	Jun. 17, 2027	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH02-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 02, 2025	May 01, 2026	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 01, 2026	Apr. 30, 2027	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 20, 2025	Feb. 19, 2026	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Feb. 06, 2026	Feb. 05, 2027	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH03-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jul. 17, 2025	Jul. 16, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 21, 2025	Feb. 20, 2026	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 13, 2026	Feb. 12, 2027	Radiation (03CH04-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120D-01816	1GHz~18GHz	Dec. 31, 2025	Dec. 30, 2026	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH04-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 11, 2025	Mar. 10, 2026	Radiation (03CH04-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 10, 2026	Mar. 09, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH04-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH04-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 10, 2025	Jun. 09, 2026	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 30, 2026	Mar. 29, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 25, 2025	Apr. 24, 2026	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Apr. 24, 2026	Apr. 23, 2027	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 27, 2025	Sep. 26, 2026	Radiation (03CH05-CB)
Horn Antenna	ETS-Lindgren	3115	00143147	750MHz~18GHz	Nov. 05, 2025	Nov. 04, 2026	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 11, 2025	Mar. 10, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EM	EM01G18GA	60844	1 ~ 18GHz	Mar. 10, 2026	Mar. 09, 2027	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 28, 2025	Jun. 27, 2026	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 27, 2026	Jun. 26, 2027	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH5265	20240911-1	1~ 26.5GHz	Sep. 18, 2025	Sep. 17, 2026	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH5265	20211115-1	1~ 26.5GHz	Jan. 13, 2026	Jan. 12, 2027	Radiation (03CH05-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH05-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 10, 2025	Jun. 09, 2026	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	May 08, 2026	May 07, 2027	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.10	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Aug. 22, 2025	Aug. 21, 2026	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Oct. 07, 2025	Oct. 06, 2026	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 30, 2025	Jul. 29, 2026	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 21, 2025	Nov. 20, 2026	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 27, 2025	Aug. 26, 2026	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Sep. 25, 2025	Sep. 24, 2026	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Nov. 13, 2025	Nov. 12, 2026	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 27	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV3044	101321	9kHz ~ 44GHz	Jul. 01, 2025	Jun. 30, 2026	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Oct. 28, 2025	Oct. 27, 2026	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Oct. 28, 2025	Oct. 27, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)

**RADIO TEST REPORT****Report No. : FR5D2458AM**

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-03	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 18 GHz	Sep. 30, 2025	Sep. 29, 2026	Conducted (TH02-CB)
Switch	SPTCB	SP-SWI	SWI-02	1–18 GHz	Sep. 20, 2025	Sep. 19, 2026	Conducted (TH02-CB)
Test Software	SPORTON	SENSE-15407 _NII	V5.11. 27	5.15GHz- 7.115GHz	N.C.R.	N.C.R.	Conducted (TH02-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 11	Pass	QP	150k	61.87	66.00	-4.13	Line

Mode 11

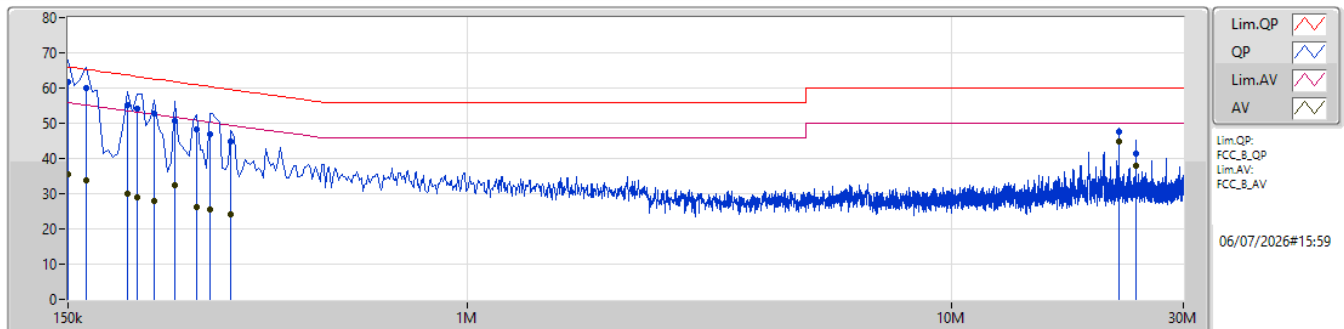

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	61.87	66.00	-4.13	10.06	Line	"Worst"	51.81	0.08	0.10	9.88						
AV	150k	35.38	56.00	-20.62	10.06	Line	-	25.32	0.08	0.10	9.88						
QP	163.5k	59.85	65.27	-5.42	10.01	Line	-	49.84	0.08	0.09	9.84						
AV	163.5k	33.70	55.27	-21.57	10.01	Line	-	23.69	0.08	0.09	9.84						
QP	199.5k	55.01	63.63	-8.62	9.90	Line	-	45.11	0.08	0.06	9.76						
AV	199.5k	29.90	53.63	-23.73	9.90	Line	-	20.00	0.08	0.06	9.76						
QP	208.5k	54.23	63.27	-9.04	9.91	Line	-	44.32	0.08	0.06	9.77						
AV	208.5k	29.11	53.27	-24.16	9.91	Line	-	19.20	0.08	0.06	9.77						
QP	226.5k	52.80	62.58	-9.78	9.94	Line	-	42.86	0.08	0.07	9.79						
AV	226.5k	27.95	52.58	-24.63	9.94	Line	-	18.01	0.08	0.07	9.79						
QP	249k	50.64	61.79	-11.15	9.96	Line	-	40.68	0.08	0.08	9.80						
AV	249k	32.57	51.79	-19.22	9.96	Line	-	22.61	0.08	0.08	9.80						
QP	276k	48.43	60.93	-12.50	10.00	Line	-	38.43	0.08	0.09	9.83						
AV	276k	26.35	50.93	-24.58	10.00	Line	-	16.35	0.08	0.09	9.83						
QP	294k	47.00	60.42	-13.42	10.01	Line	-	36.99	0.08	0.09	9.84						
AV	294k	25.58	50.42	-24.84	10.01	Line	-	15.57	0.08	0.09	9.84						
QP	325.5k	44.86	59.56	-14.70	10.04	Line	-	34.82	0.08	0.10	9.86						
AV	325.5k	24.31	49.56	-25.25	10.04	Line	-	14.27	0.08	0.10	9.86						
QP	22.119M	47.46	60.00	-12.54	11.02	Line	-	36.44	0.30	0.38	10.34						
AV	22.119M	44.86	50.00	-5.14	11.02	Line	-	33.84	0.30	0.38	10.34						
QP	23.964M	41.22	60.00	-18.78	11.03	Line	-	30.19	0.31	0.41	10.31						
AV	23.964M	38.07	50.00	-11.93	11.03	Line	-	27.04	0.31	0.41	10.31						

Mode 11

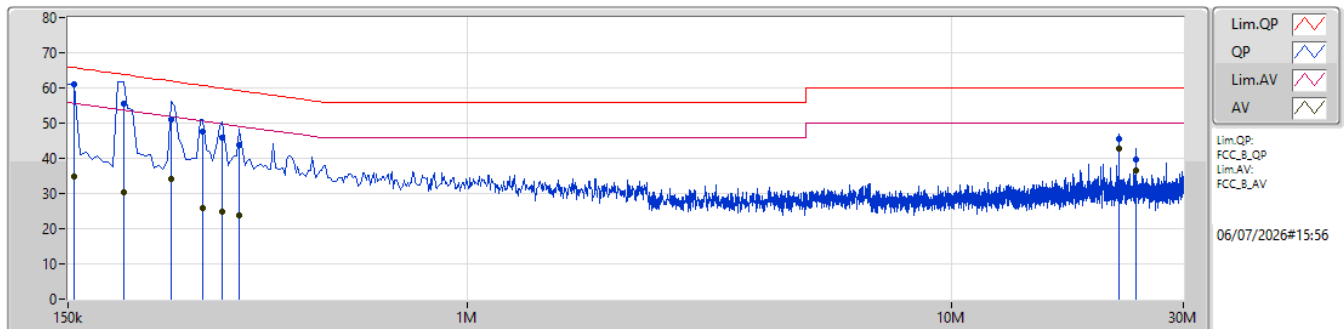

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	154.5k	61.07	65.75	-4.68	10.01	Neutral	"Worst"	51.06	0.06	0.09	9.86						
AV	154.5k	34.75	55.75	-21.00	10.01	Neutral	-	24.74	0.06	0.09	9.86						
QP	195k	55.53	63.82	-8.29	9.89	Neutral	-	45.64	0.06	0.06	9.77						
AV	195k	30.39	53.82	-23.43	9.89	Neutral	-	20.50	0.06	0.06	9.77						
QP	244.5k	51.00	61.95	-10.95	9.94	Neutral	-	41.06	0.06	0.08	9.80						
AV	244.5k	34.26	51.95	-17.69	9.94	Neutral	-	24.32	0.06	0.08	9.80						
QP	285k	47.59	60.67	-13.08	9.98	Neutral	-	37.61	0.06	0.09	9.83						
AV	285k	25.79	50.67	-24.88	9.98	Neutral	-	15.81	0.06	0.09	9.83						
QP	312k	45.92	59.92	-14.00	10.01	Neutral	-	35.91	0.06	0.10	9.85						
AV	312k	24.87	49.92	-25.05	10.01	Neutral	-	14.86	0.06	0.10	9.85						
QP	339k	43.95	59.23	-15.28	10.04	Neutral	-	33.91	0.06	0.11	9.87						
AV	339k	23.76	49.23	-25.47	10.04	Neutral	-	13.72	0.06	0.11	9.87						
QP	22.119M	45.49	60.00	-14.51	11.00	Neutral	-	34.49	0.28	0.38	10.34						
AV	22.119M	42.83	50.00	-7.17	11.00	Neutral	-	31.83	0.28	0.38	10.34						
QP	23.964M	39.57	60.00	-20.43	11.02	Neutral	-	28.55	0.30	0.41	10.31						
AV	23.964M	36.41	50.00	-13.59	11.02	Neutral	-	25.39	0.30	0.41	10.31						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	80.56M	77.12M	77M1D1D	80.24M	76.8M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.975M	16.456M	16M5D1D	18.645M	16.412M
802.11ax HEW20_Nss1,(MCS0)_2TX	20.79M	18.9M	18M9D1D	20.24M	18.825M
802.11ax HEW40_Nss1,(MCS0)_2TX	40.59M	37.8M	37M8D1D	39.38M	37.75M
802.11ax HEW80_Nss1,(MCS0)_2TX	81.4M	77.3M	77M3D1D	80.3M	76.9M
802.11ax HEW160_Nss1,(MCS0)_2TX	81.6M	77.28M	77M3D1D	80.64M	77.04M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	18.81M	16.434M	18.7M	16.456M
5300MHz	Pass	Inf	18.755M	16.412M	18.975M	16.412M
5320MHz	Pass	Inf	18.645M	16.412M	18.975M	16.412M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	Inf	20.24M	18.9M	20.35M	18.875M
5300MHz	Pass	Inf	20.46M	18.9M	20.24M	18.85M
5320MHz	Pass	Inf	20.57M	18.825M	20.79M	18.9M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	Inf	40.59M	37.75M	39.71M	37.8M
5310MHz	Pass	Inf	39.82M	37.75M	39.38M	37.8M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	Inf	81.4M	77.3M	80.3M	76.9M
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	80.56M	76.8M	80.24M	77.12M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.64M	77.28M	81.6M	77.04M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band



Port X-OBW = Port X 99% occupied bandwidth

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5260MHz

21/03/2026

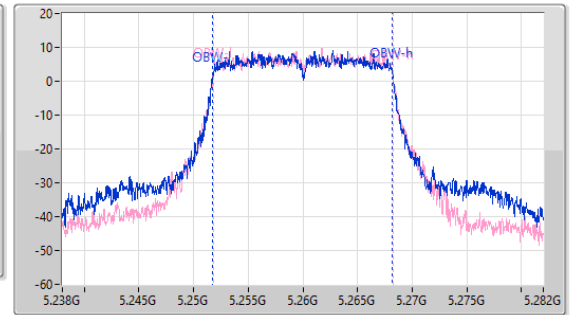
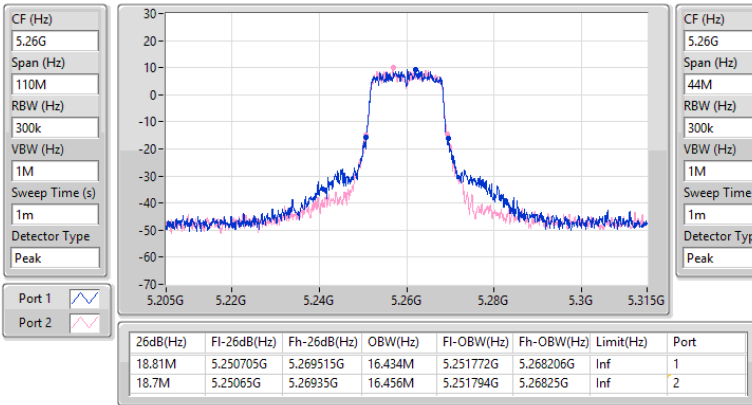


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5300MHz

21/03/2026

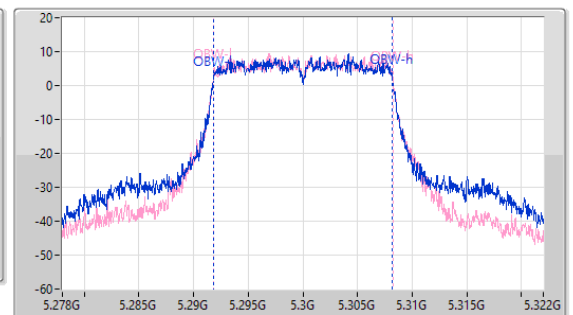
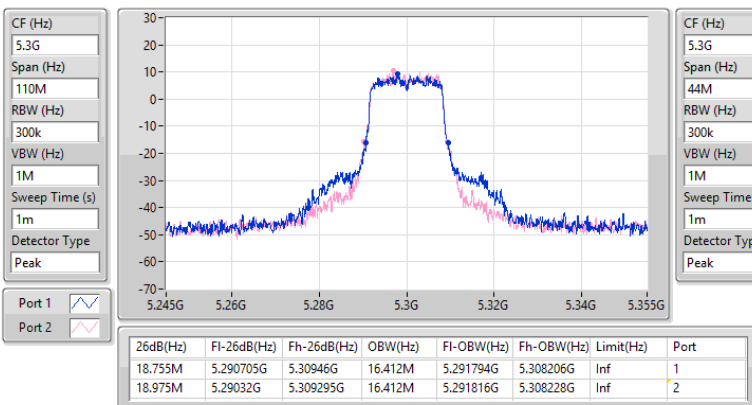


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5320MHz

21/03/2026

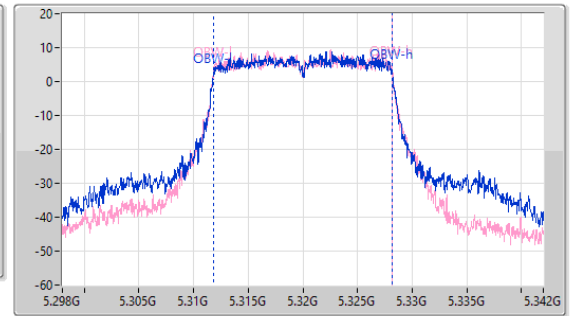
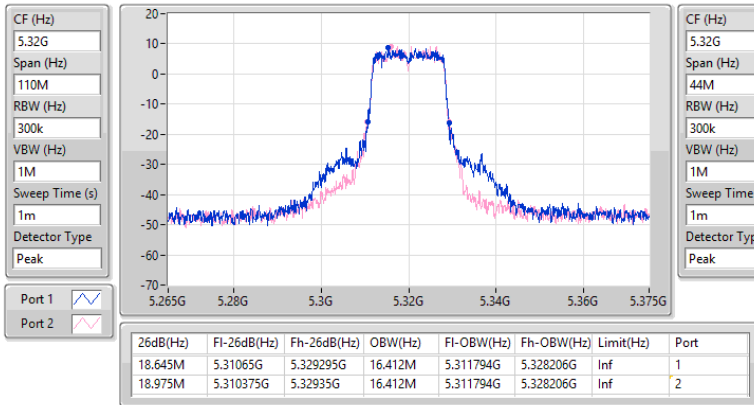


5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

EBW

5260MHz

21/03/2026

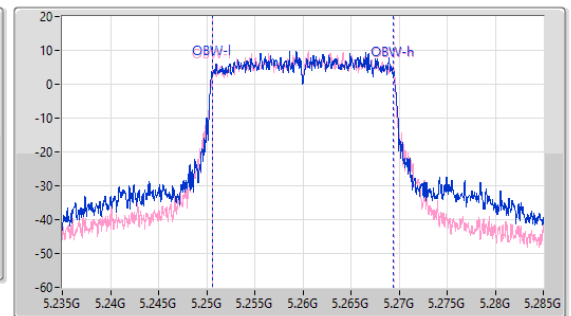
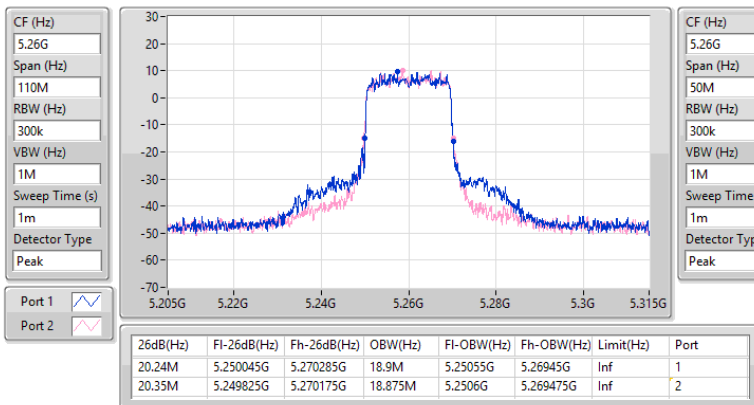


5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

EBW

5300MHz

21/03/2026

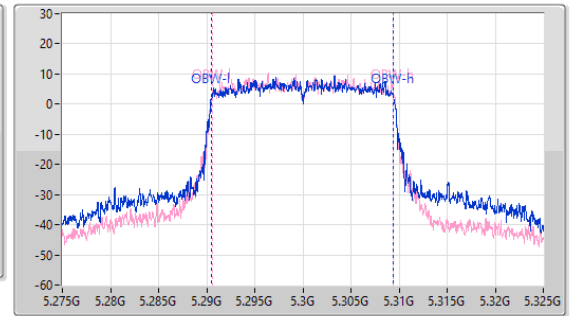
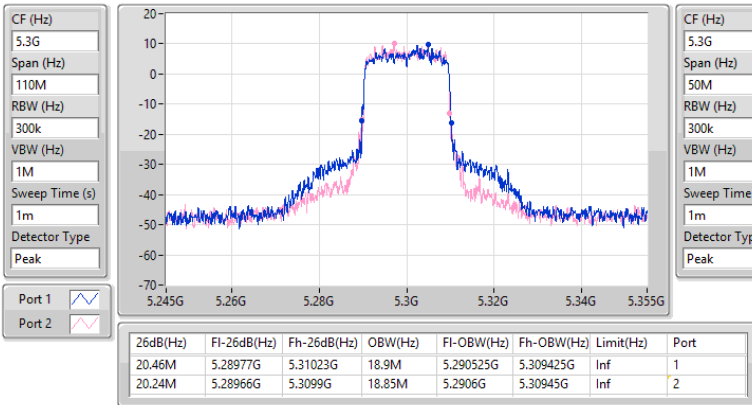


5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

EBW

5320MHz

21/03/2026

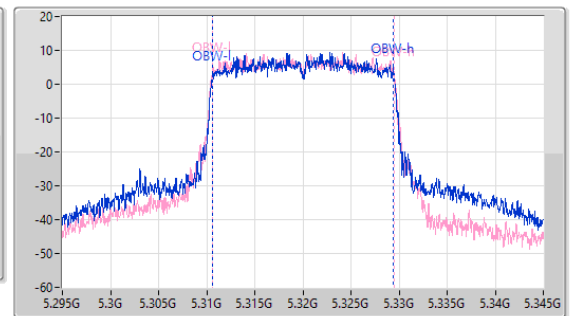
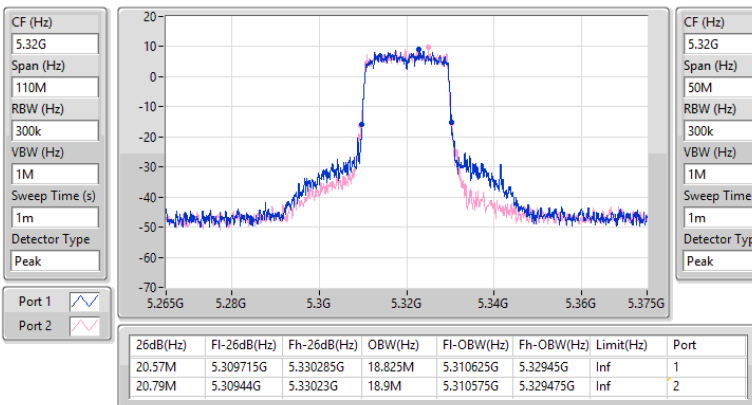


5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

EBW

5270MHz

21/03/2026

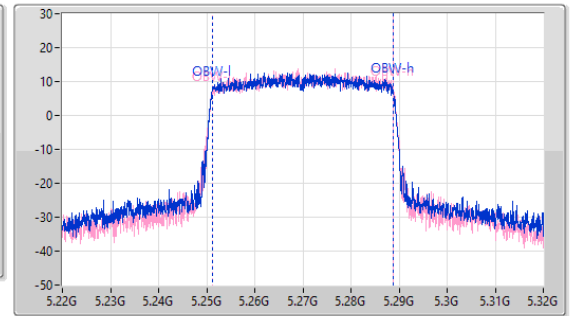
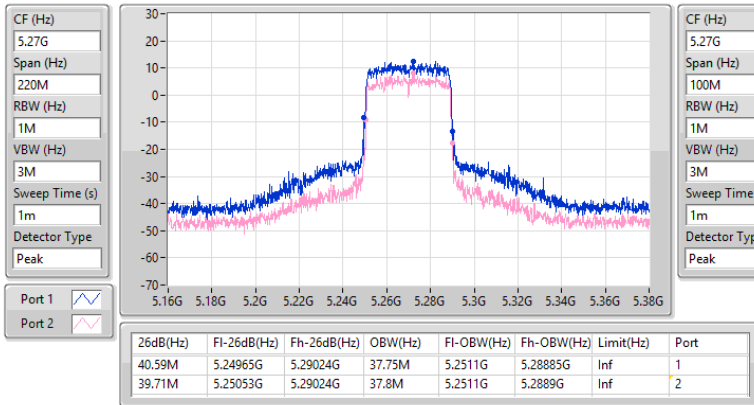


5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

EBW

5310MHz

21/03/2026

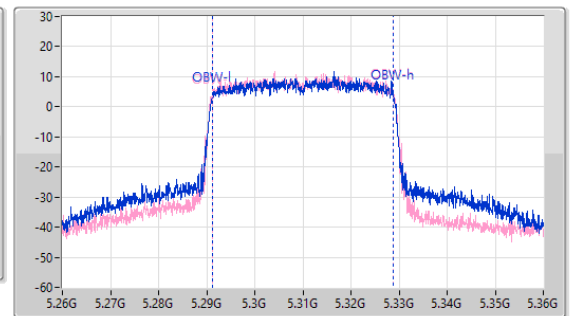
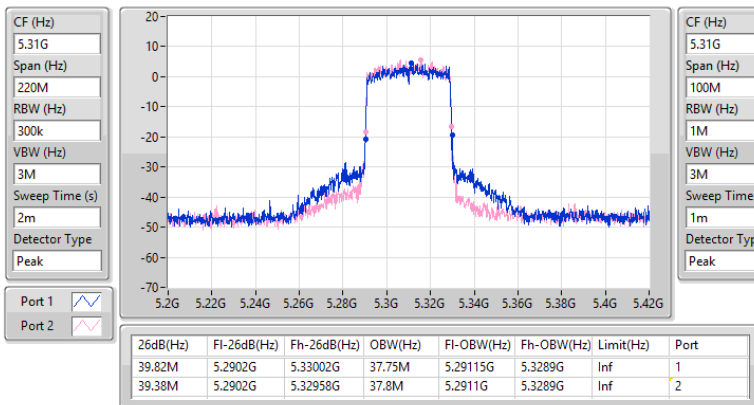


5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

5290MHz

21/03/2026

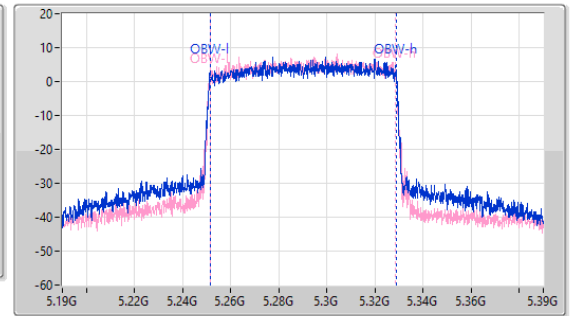
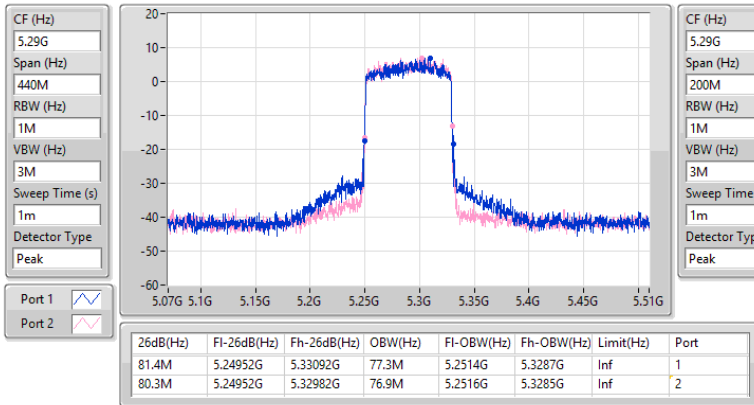


5.15-5.25GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

23/03/2026

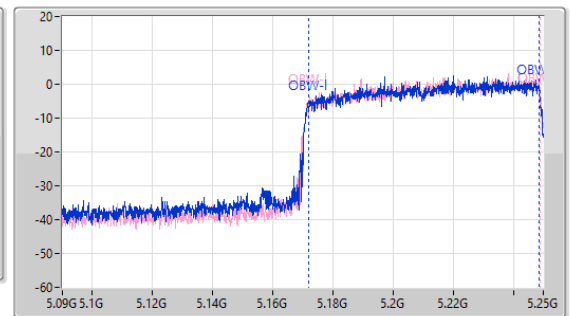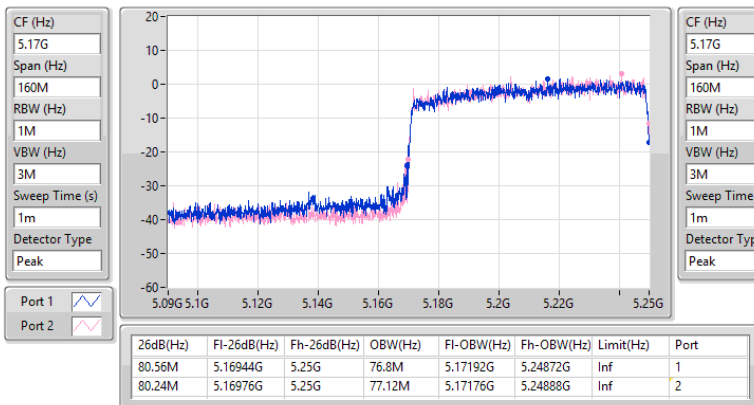


5.25-5.35GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

23/03/2026

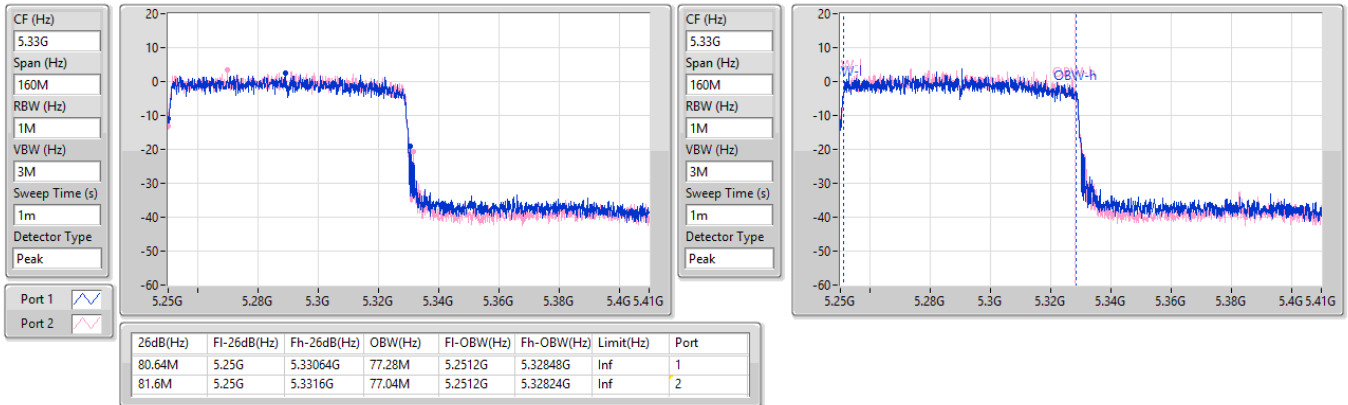

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	80.56M	77.12M	77M1D1D	80.24M	76.8M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	81.6M	77.28M	77M3D1D	80.64M	77.04M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	80.56M	76.8M	80.24M	77.12M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.64M	77.28M	81.6M	77.04M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz 802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

23/03/2026

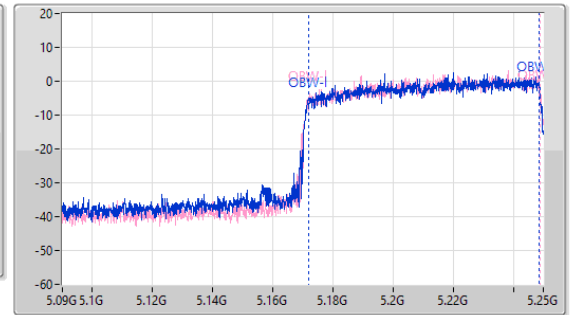
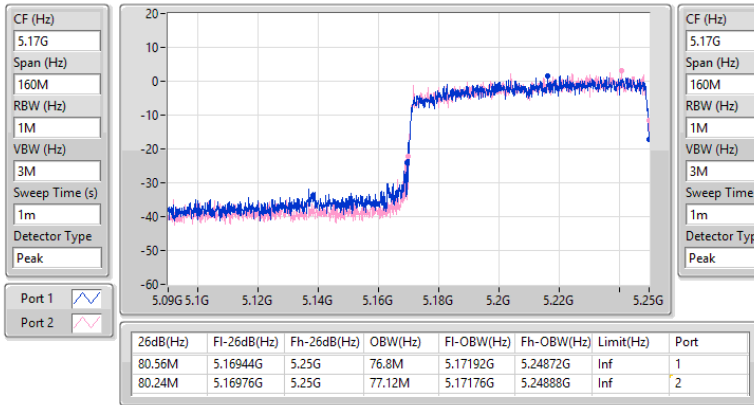


5.25-5.35GHz 802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

23/03/2026

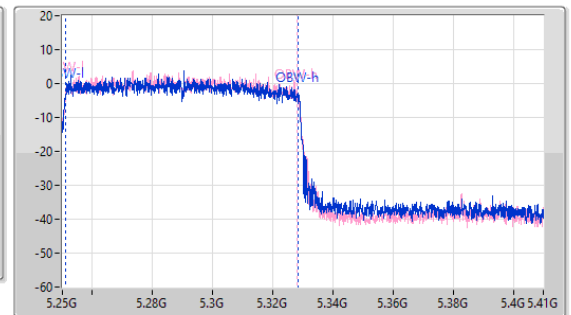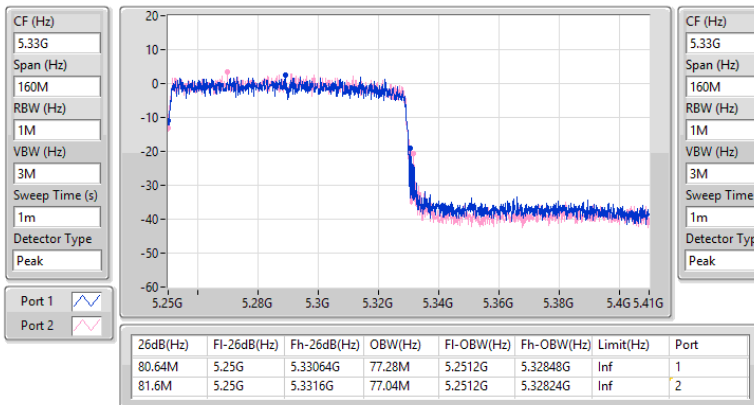

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	83.6M	77.678M	77M7D1D	83.6M	77.678M
802.11be EHT160_Nss1,(MCS0)_2TX	83.92M	77.661M	77M7D1D	83.84M	77.626M
802.11be EHT160_Nss1,(MCS0)_4TX	85.04M	77.769M	77M8D1D	83.52M	77.705M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	27.225M	16.903M	16M9D1D	23.045M	16.834M
802.11a_Nss1,(6Mbps)_2TX	23.925M	16.901M	16M9D1D	22.11M	16.761M
802.11a_Nss1,(6Mbps)_4TX	22.55M	16.78M	16M8D1D	21.505M	16.713M
802.11be EHT20_Nss1,(MCS0)_1TX	22.88M	19.096M	19M1D1D	21.835M	19.068M
802.11be EHT20_Nss1,(MCS0)_2TX	23.925M	19.125M	19M1D1D	21.395M	19.022M
802.11be EHT20_Nss1,(MCS0)_4TX	22.605M	19.059M	19M1D1D	21.725M	19.029M
802.11be EHT40_Nss1,(MCS0)_1TX	43.67M	37.997M	38M0D1D	42.9M	37.986M
802.11be EHT40_Nss1,(MCS0)_2TX	43.45M	38.12M	38M1D1D	42.57M	37.999M
802.11be EHT40_Nss1,(MCS0)_4TX	44.66M	38.129M	38M1D1D	42.02M	37.995M
802.11be EHT80_Nss1,(MCS0)_1TX	88.66M	77.623M	77M6D1D	88.66M	77.623M
802.11be EHT80_Nss1,(MCS0)_2TX	89.1M	77.793M	77M8D1D	86.24M	77.61M
802.11be EHT80_Nss1,(MCS0)_4TX	86.24M	77.838M	77M8D1D	85.36M	77.516M
802.11be EHT160_Nss1,(MCS0)_1TX	86.56M	77.633M	77M6D1D	86.56M	77.633M
802.11be EHT160_Nss1,(MCS0)_2TX	85.44M	77.761M	77M8D1D	84.48M	77.72M
802.11be EHT160_Nss1,(MCS0)_4TX	87.52M	77.764M	77M8D1D	82.88M	77.55M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	27.225M	16.903M						
5300MHz	Pass	Inf	23.98M	16.834M						
5320MHz	Pass	Inf	23.045M	16.895M						
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	22.88M	19.096M						
5300MHz	Pass	Inf	22.66M	19.074M						
5320MHz	Pass	Inf	21.835M	19.068M						
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	Inf	42.9M	37.986M						
5310MHz	Pass	Inf	43.67M	37.997M						
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	Inf	88.66M	77.623M						
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	83.6M	77.678M						
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	86.56M	77.633M						
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	22.935M	16.881M	23.925M	16.901M				
5300MHz	Pass	Inf	23.32M	16.866M	22.495M	16.862M				
5320MHz	Pass	Inf	22.11M	16.78M	23.265M	16.761M				
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	21.395M	19.125M	23.595M	19.104M				
5300MHz	Pass	Inf	23.925M	19.061M	23.485M	19.113M				
5320MHz	Pass	Inf	22.055M	19.022M	22.33M	19.053M				
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	Inf	42.57M	38.109M	42.9M	38.12M				
5310MHz	Pass	Inf	43.45M	38.021M	43.12M	37.999M				
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	Inf	86.24M	77.793M	89.1M	77.61M				
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	83.92M	77.626M	83.84M	77.661M				
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	85.44M	77.761M	84.48M	77.72M				
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	21.835M	16.713M	21.505M	16.745M	21.56M	16.732M	22.33M	16.729M
5300MHz	Pass	Inf	21.835M	16.755M	21.835M	16.76M	21.615M	16.761M	21.89M	16.751M
5320MHz	Pass	Inf	21.615M	16.737M	22.55M	16.765M	21.67M	16.764M	21.78M	16.78M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	Inf	22.55M	19.03M	21.725M	19.044M	22.495M	19.038M	22.605M	19.042M
5300MHz	Pass	Inf	22.22M	19.033M	22.33M	19.056M	21.945M	19.041M	22M	19.049M
5320MHz	Pass	Inf	22M	19.049M	22.275M	19.029M	21.945M	19.041M	21.835M	19.059M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	Inf	44.66M	38.082M	43.34M	38.031M	43.89M	38.04M	43.34M	38.129M
5310MHz	Pass	Inf	42.02M	38.016M	44.11M	38.086M	42.68M	38.014M	43.34M	37.995M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	Inf	85.36M	77.838M	86.02M	77.516M	85.36M	77.785M	86.24M	77.652M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	84.72M	77.705M	83.52M	77.715M	85.04M	77.769M	84.16M	77.712M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	87.52M	77.655M	82.88M	77.607M	84.96M	77.55M	83.76M	77.764M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5260MHz

19/02/2026


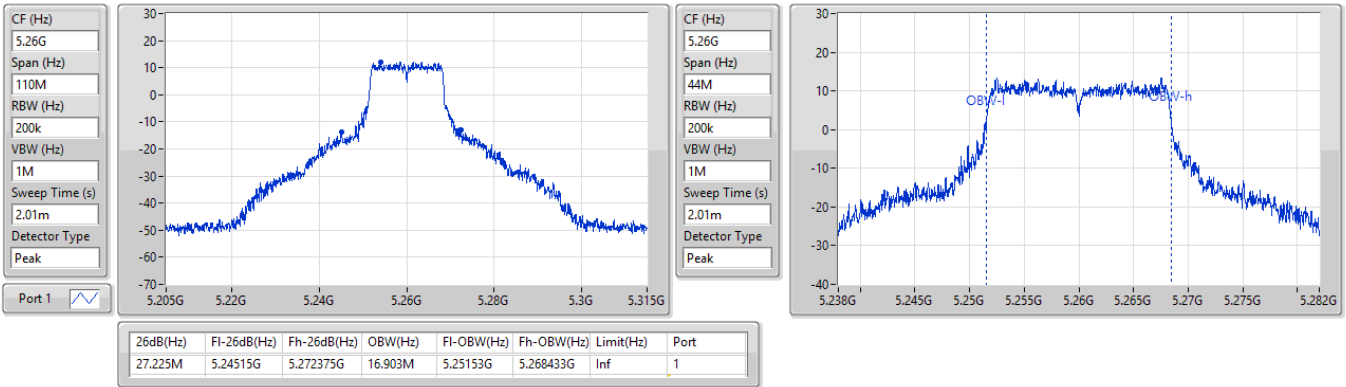

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5300MHz

19/02/2026


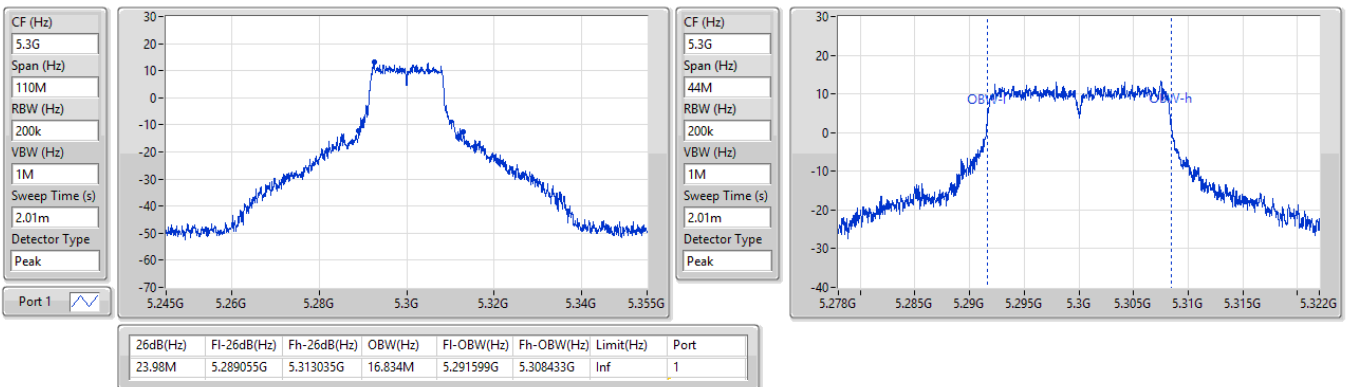


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX
EBW
5320MHz

18/02/2026

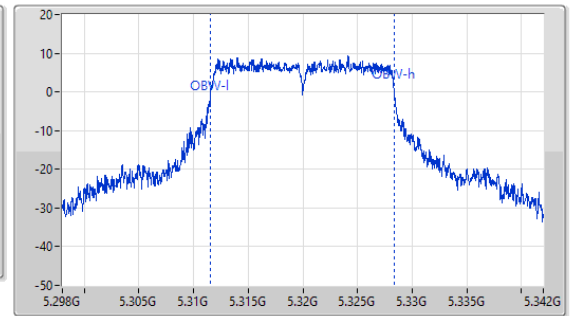
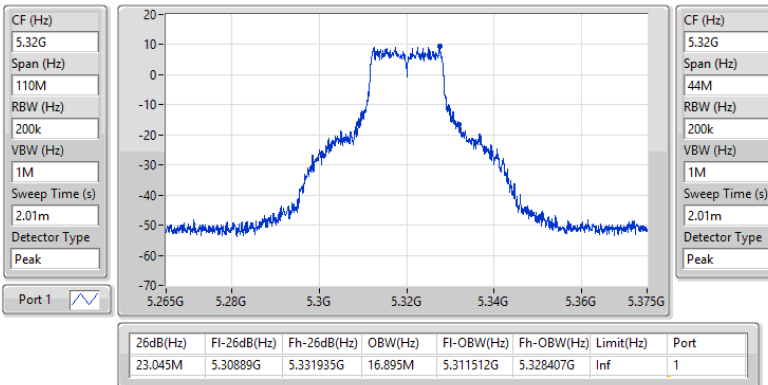

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5260MHz

19/02/2026

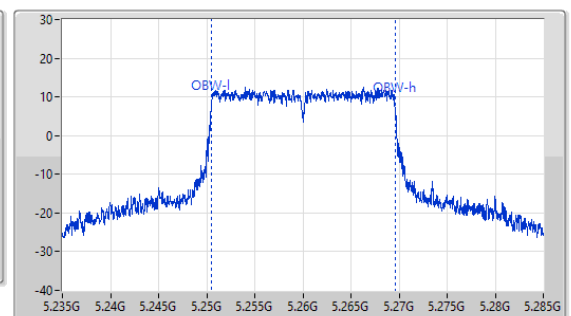
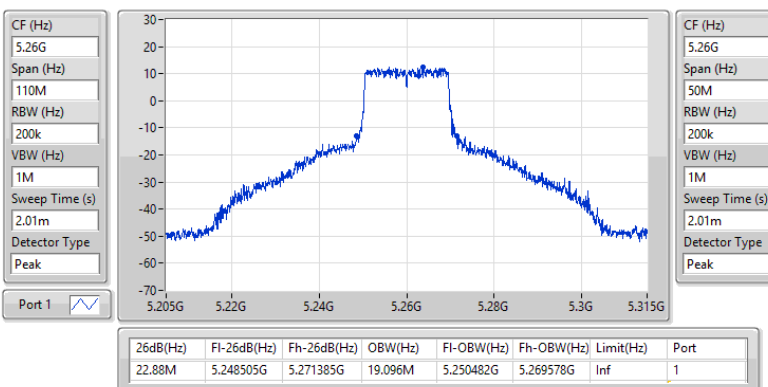


5.25-5.35GHz 802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5300MHz

19/02/2026

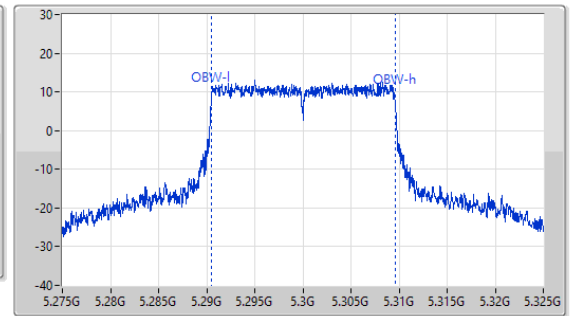
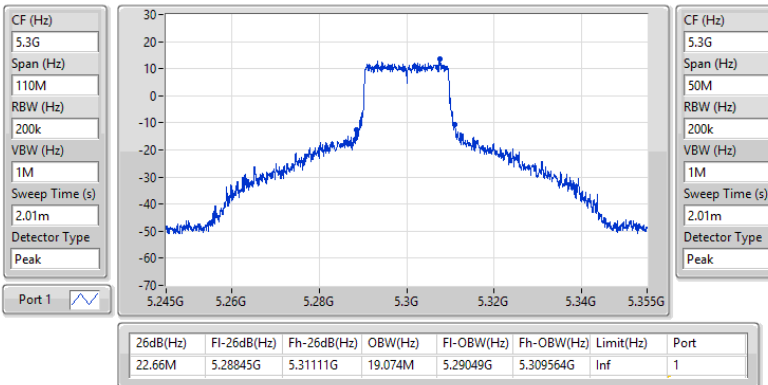

5.25-5.35GHz 802.11be EHT20_Nss1,(MCS0)_1TX
EBW
5320MHz

11/06/2026

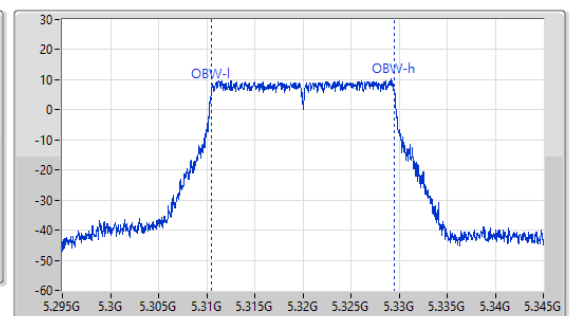
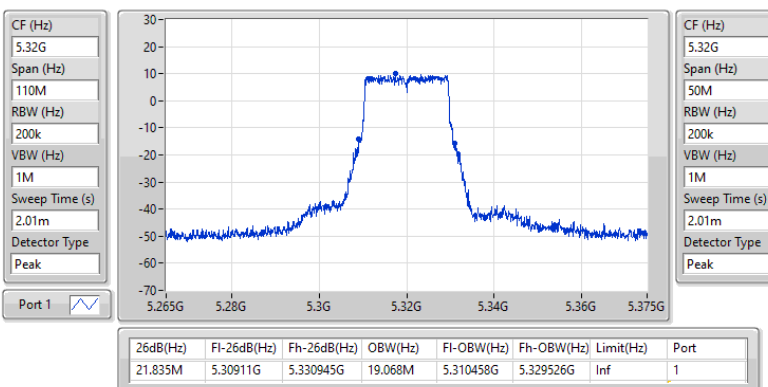


5.25-5.35GHz 802.11be EHT40_Nss1,(MCS0)_1TX
EBW
5270MHz

11/06/2026

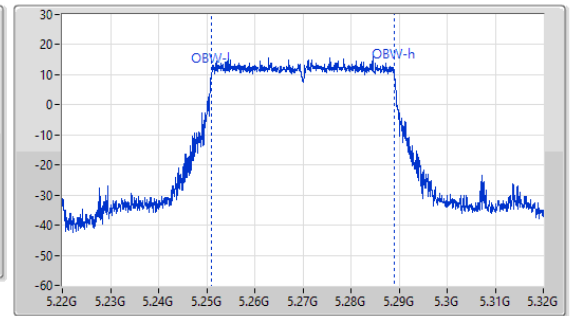
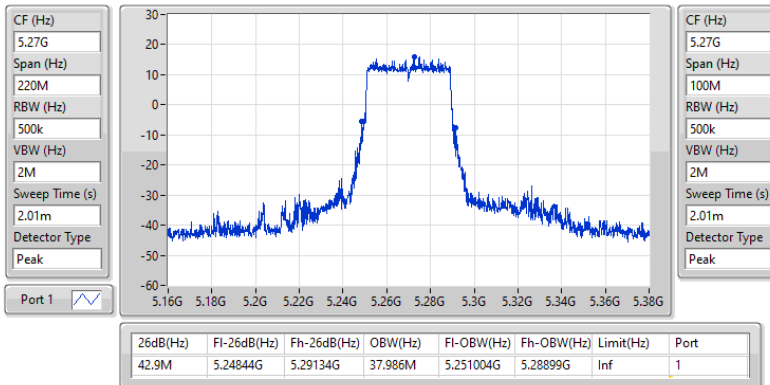

5.25-5.35GHz 802.11be EHT40_Nss1,(MCS0)_1TX
EBW
5310MHz

11/06/2026

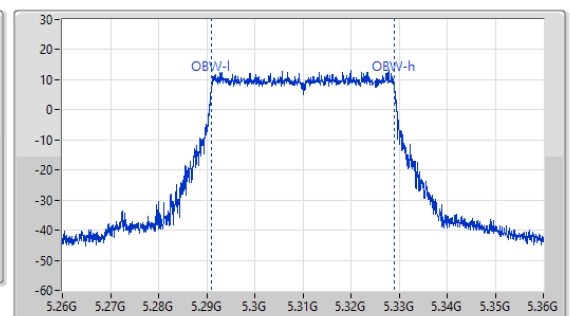
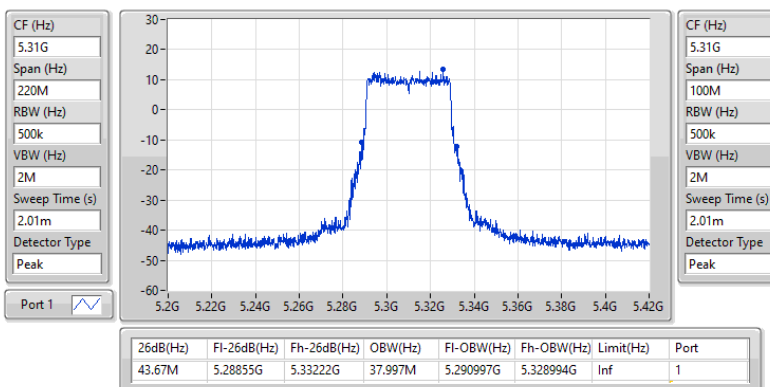


5.25-5.35GHz 802.11be EHT80_Nss1,(MCS0)_1TX
EBW
5290MHz

11/06/2026

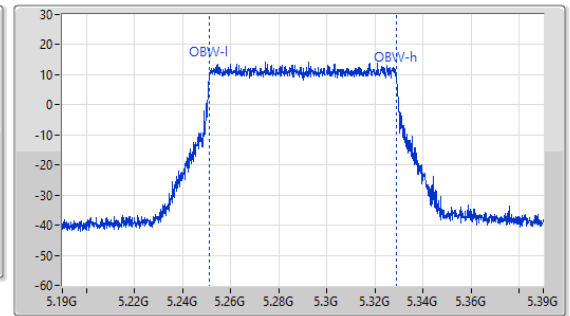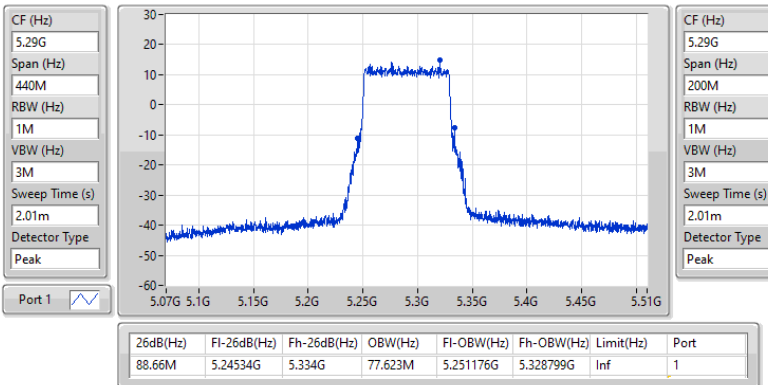
5.15-5.25GHz 802.11be EHT160_Nss1,(MCS0)_1TX
EBW
5250MHz Straddle 5.15-5.25GHz

11/06/2026

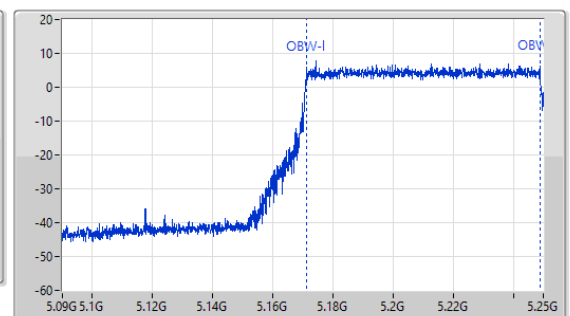
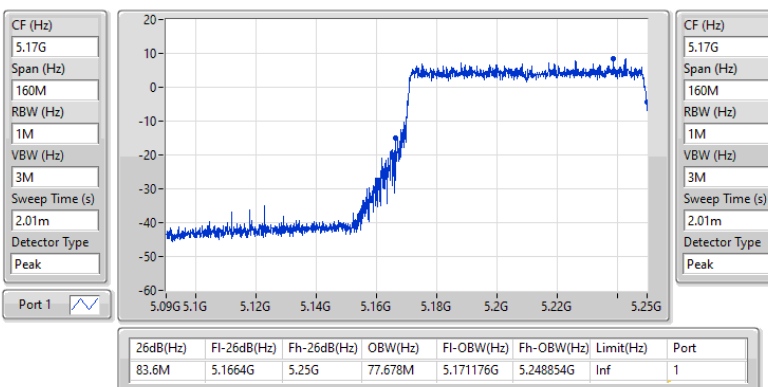


5.25-5.35GHz 802.11b EHT160_Nss1,(MCS0)_1TX

EBW

5250MHz Straddle 5.25-5.35GHz

11/06/2026

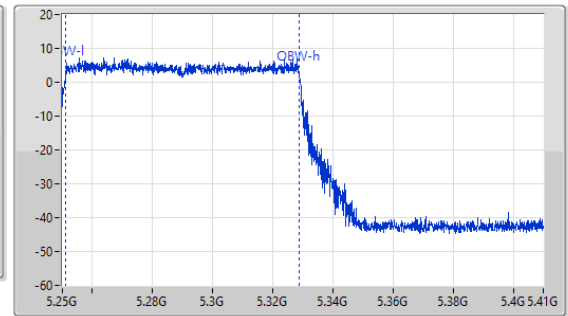
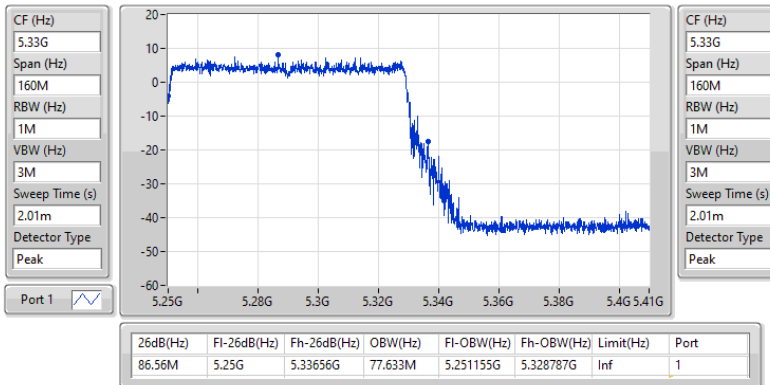


5.25-5.35GHz 802.11a_Nss1,(6Mbps)_2TX

EBW



5260MHz

18/02/2026

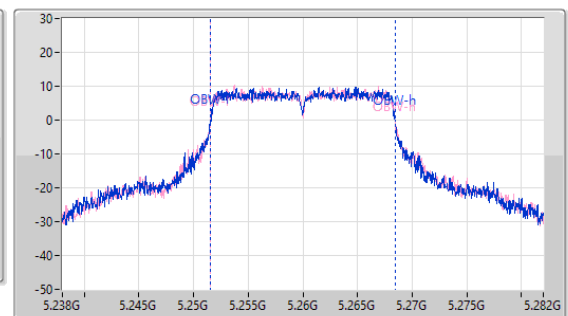
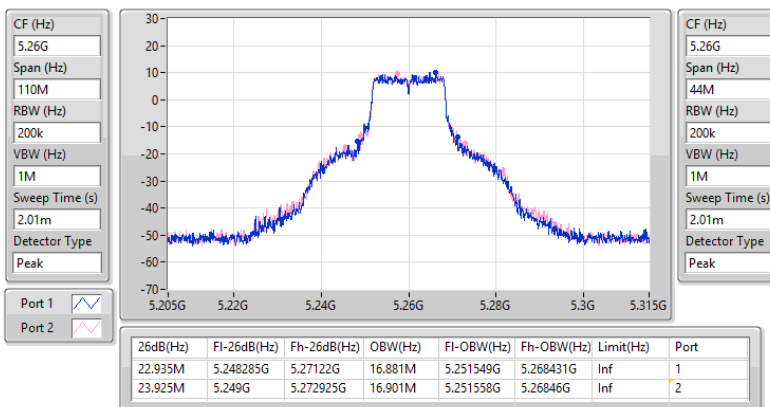


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5300MHz

18/02/2026

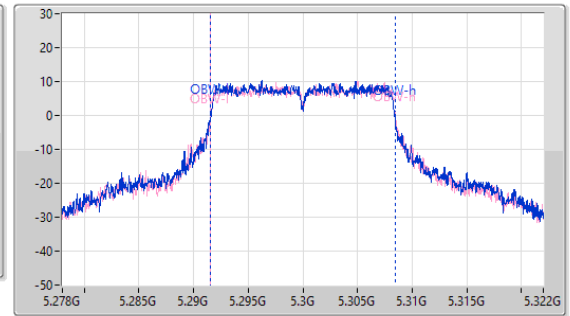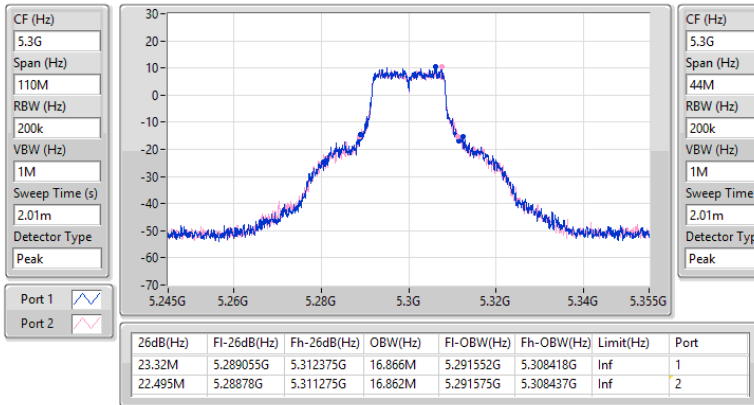
5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX
EBW
5320MHz

18/02/2026

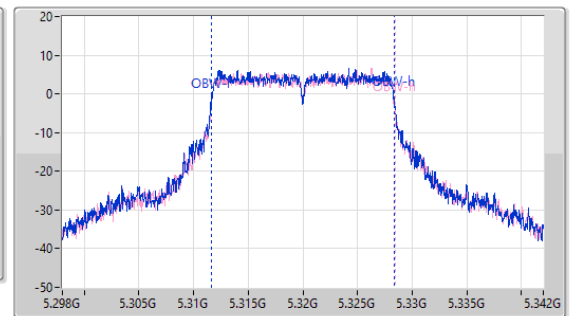
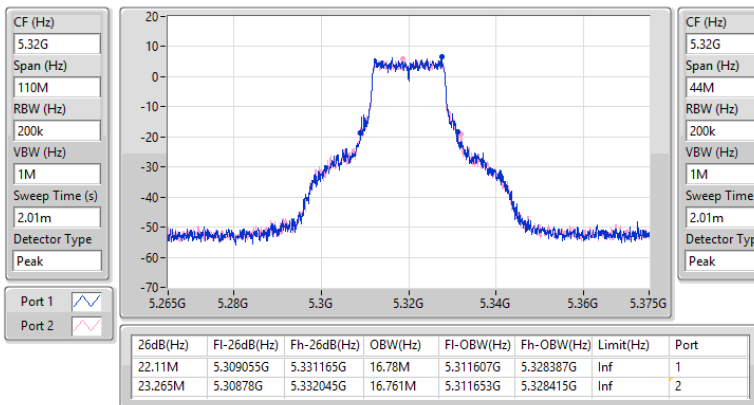


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5260MHz

18/02/2026

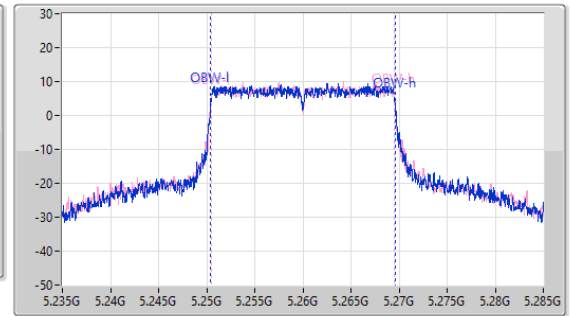
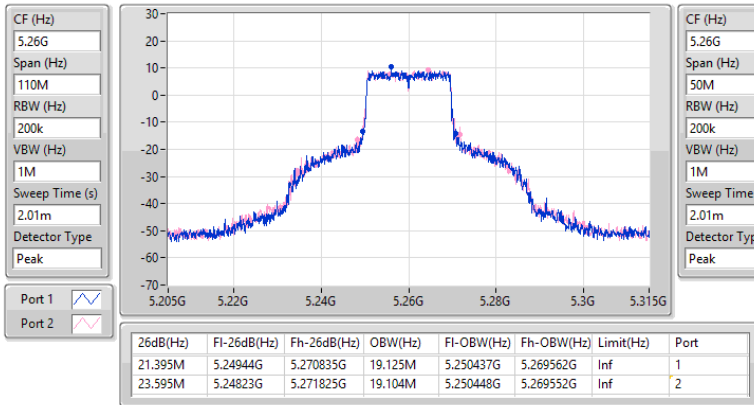


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5300MHz

18/02/2026

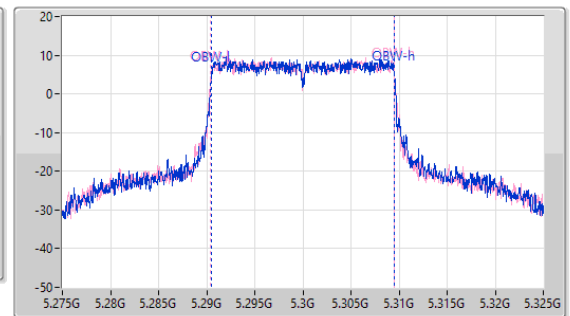
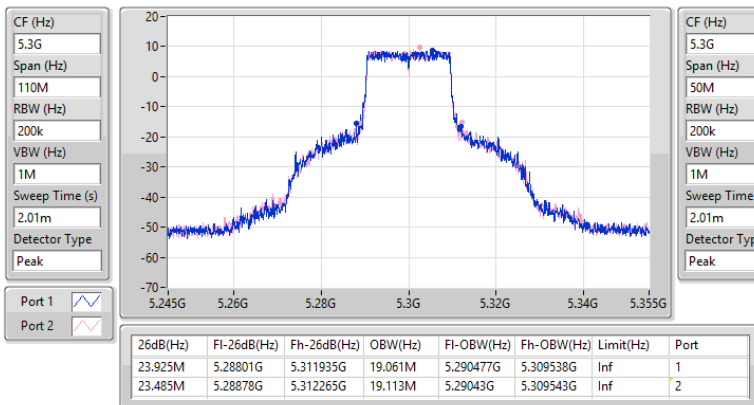


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5320MHz

11/06/2026

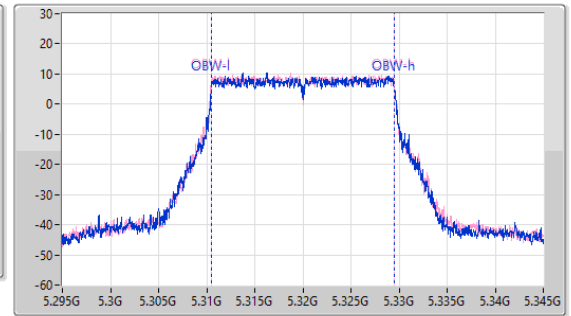
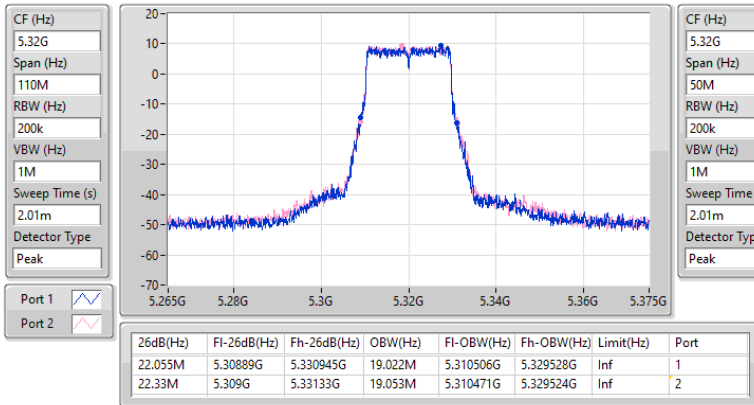


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW


5270MHz

18/02/2026

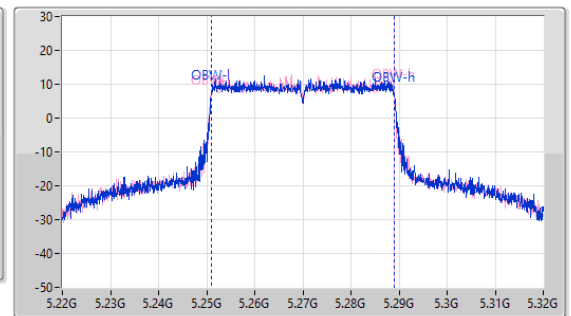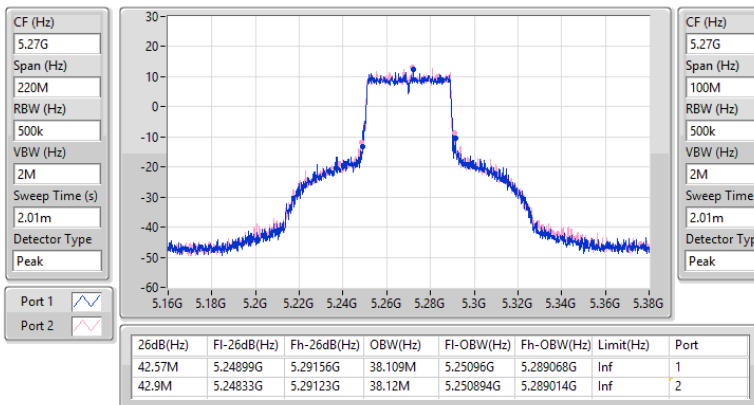


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5310MHz

11/06/2026

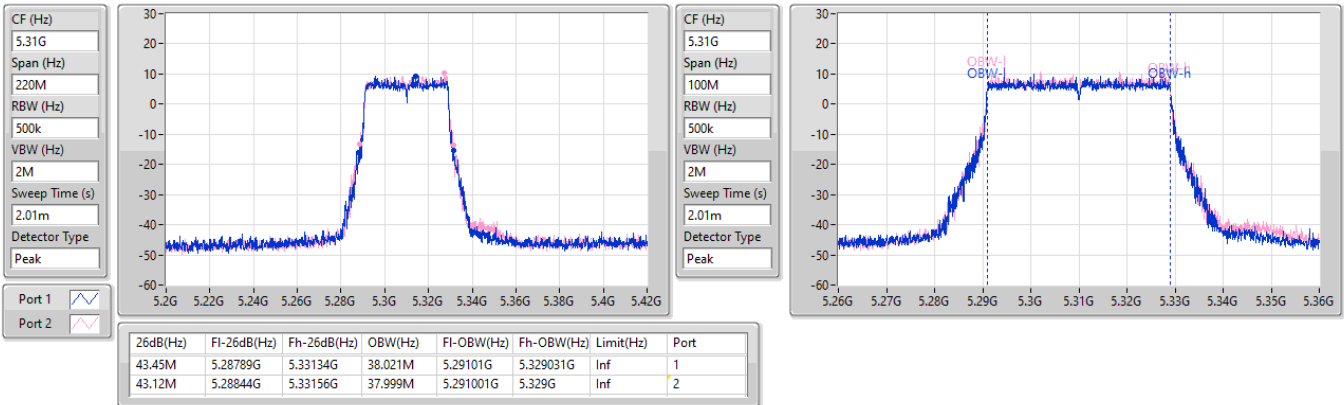
5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5290MHz

11/06/2026


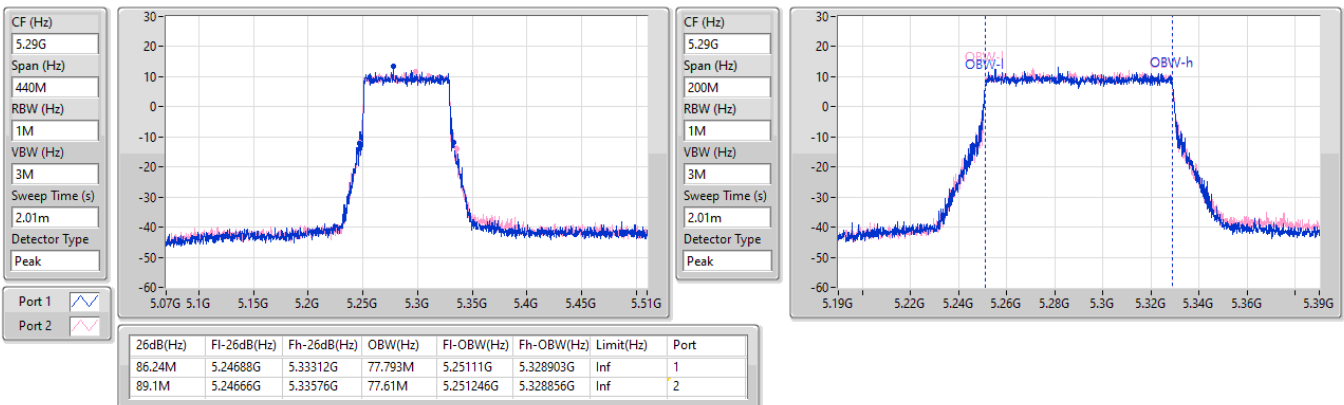


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

11/06/2026

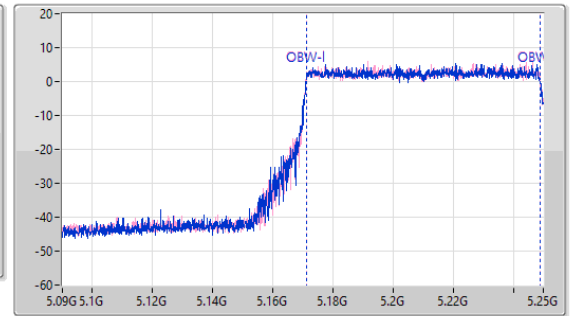
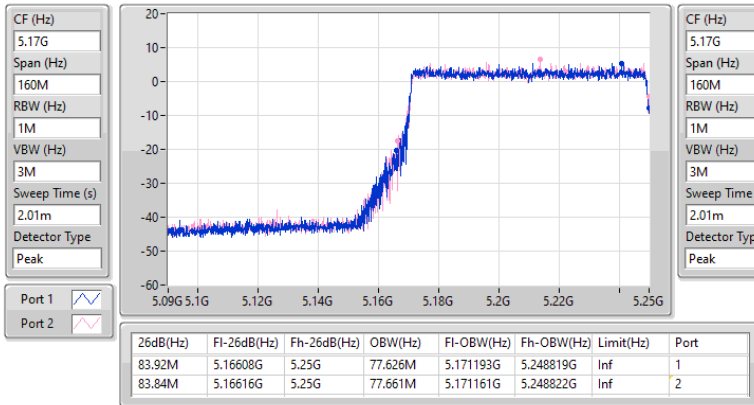


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

11/06/2026

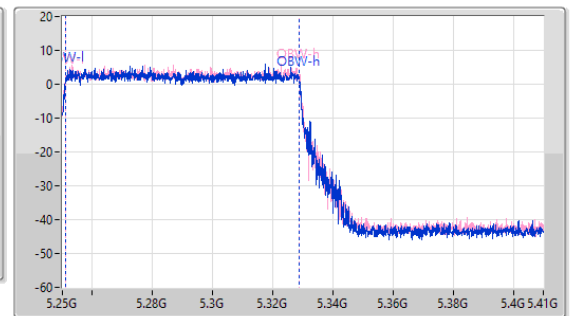
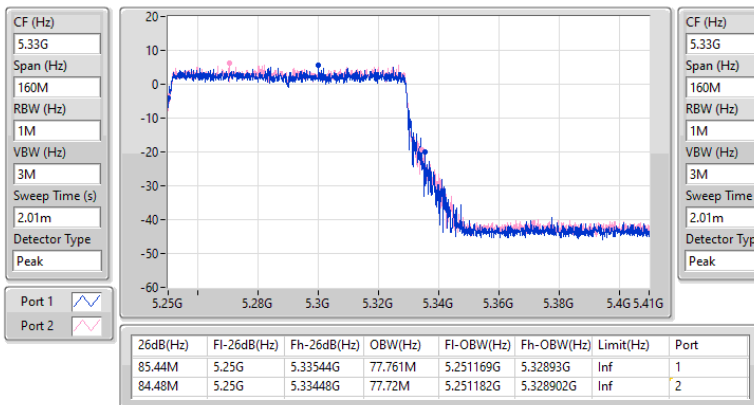


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5260MHz

18/02/2026

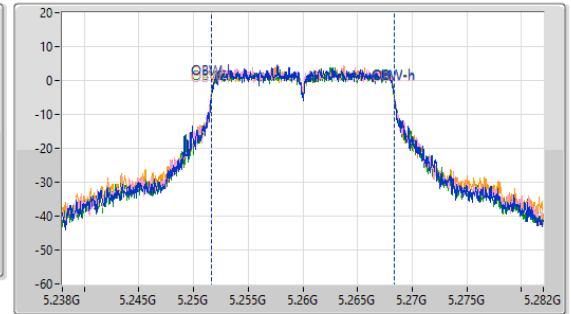
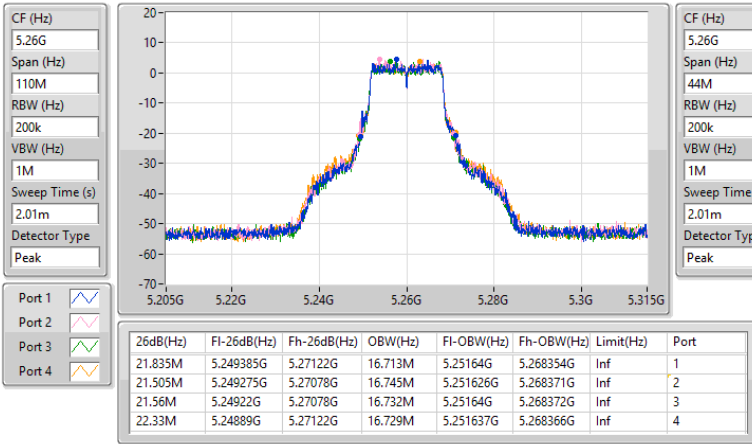


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5300MHz

18/02/2026

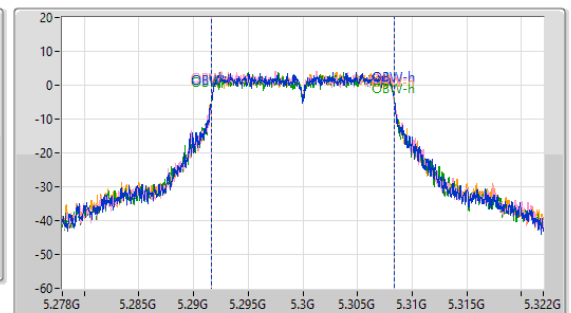
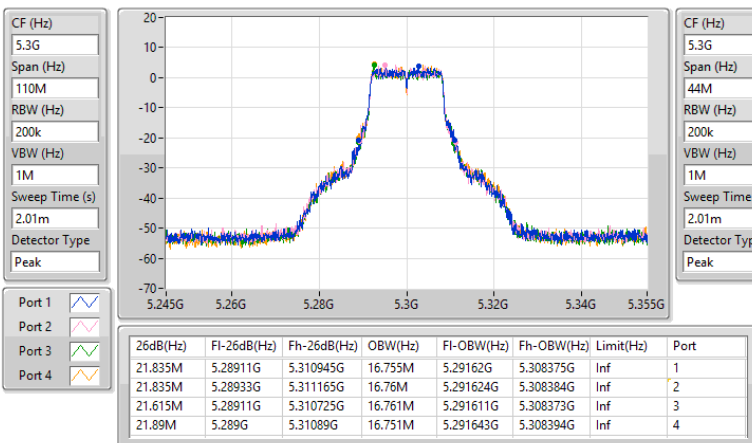


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5320MHz

18/02/2026

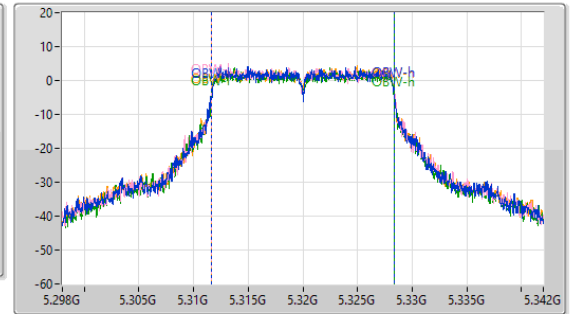
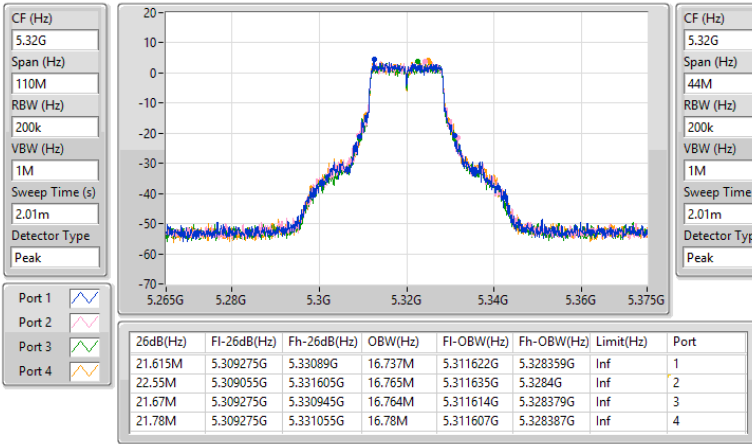


5.25-5.35GHz_802.11be_EHT20_Nss1,(MCS0)_4TX

EBW



5260MHz

18/02/2026

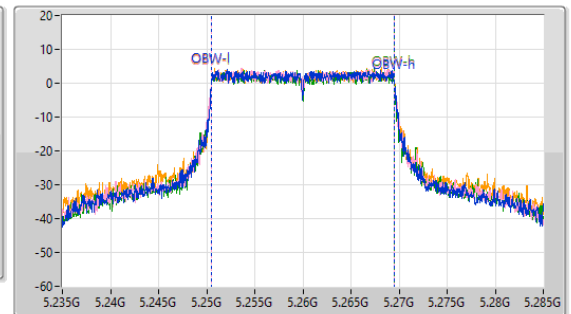
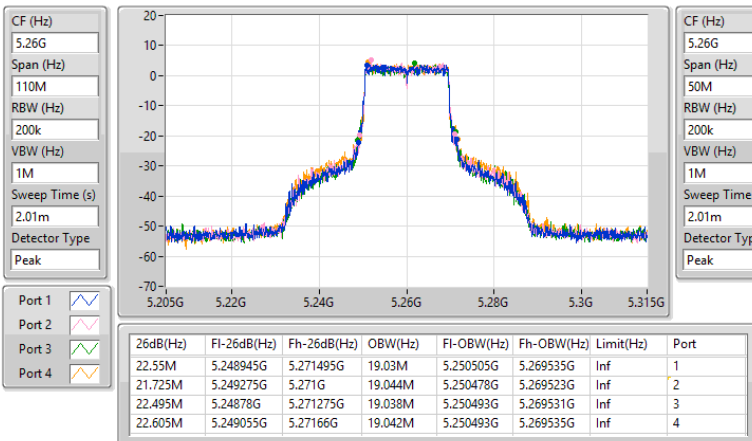


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
5300MHz

18/02/2026

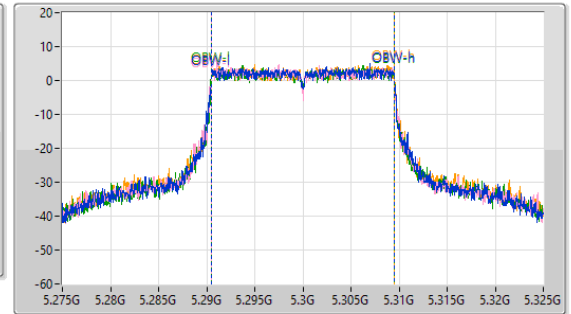
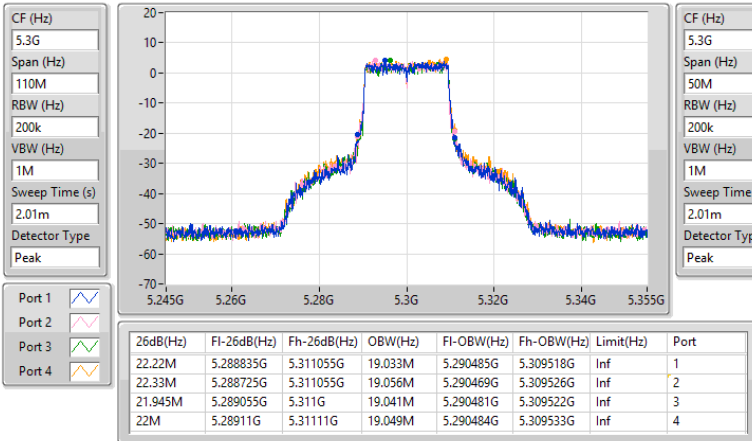

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX
EBW
5320MHz

18/02/2026

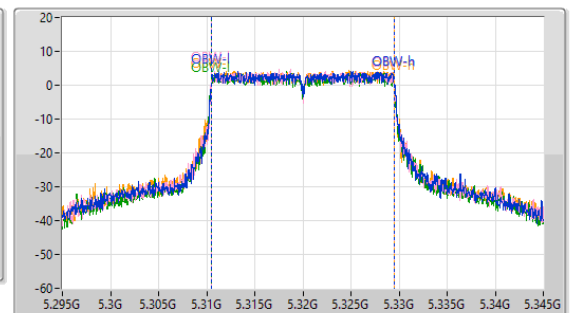
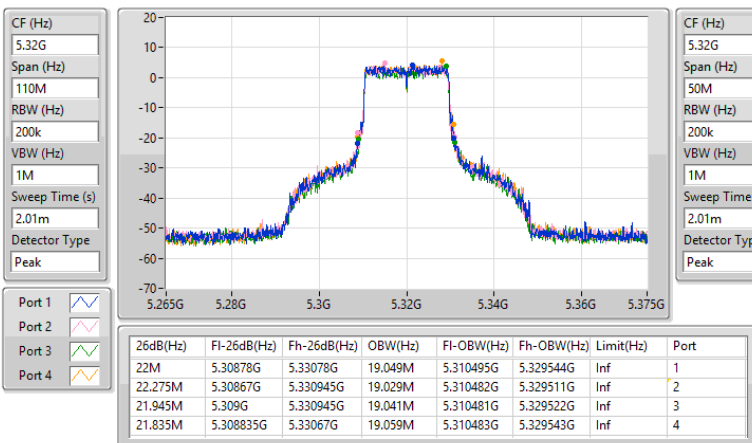


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5270MHz

18/02/2026

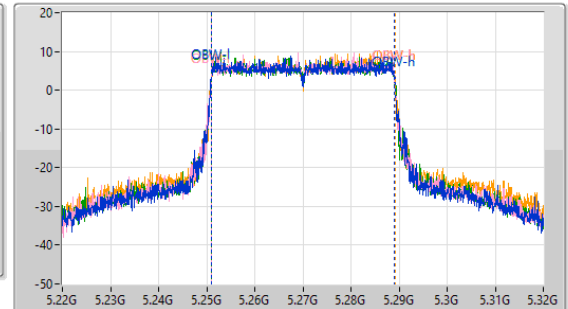
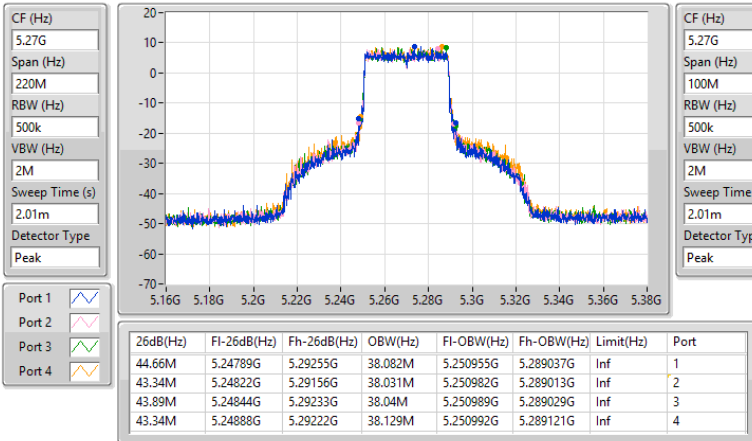

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX
EBW
5310MHz

11/06/2026

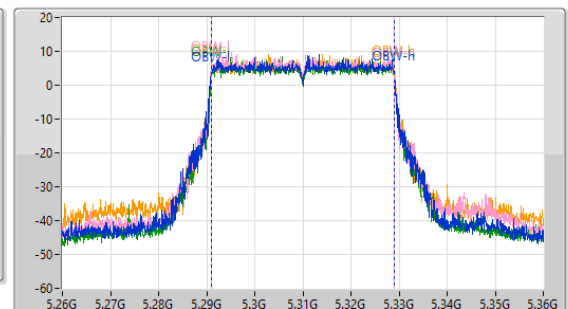
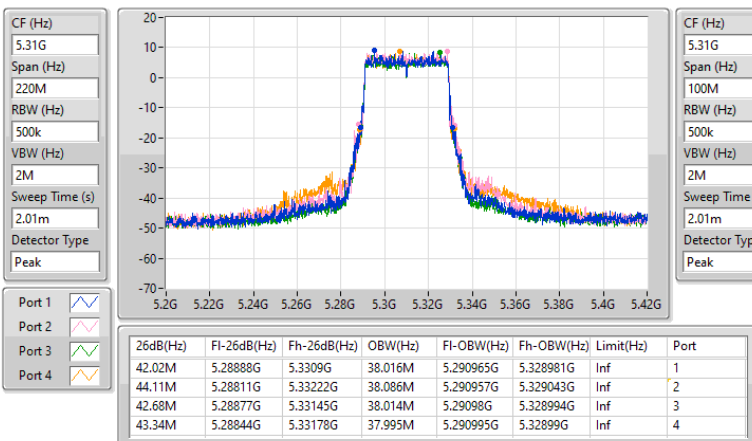


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX
EBW
5290MHz

11/06/2026

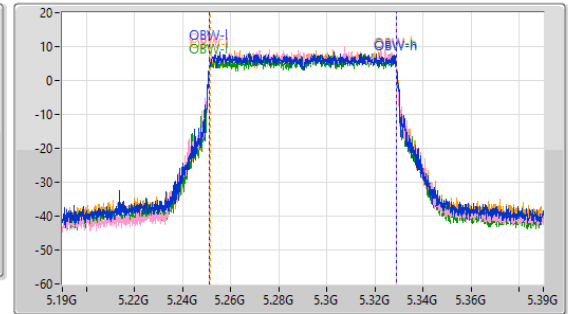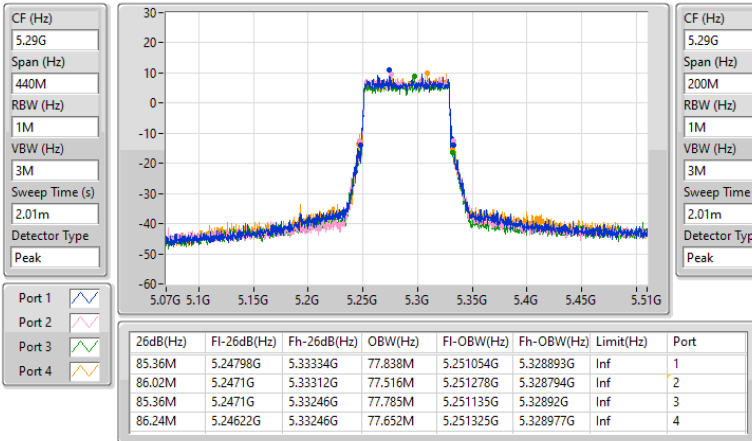
5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX
EBW
5250MHz Straddle 5.15-5.25GHz

11/06/2026

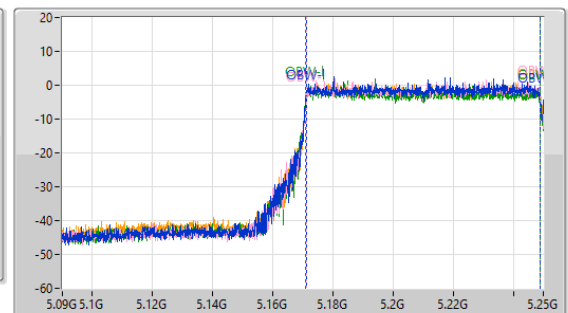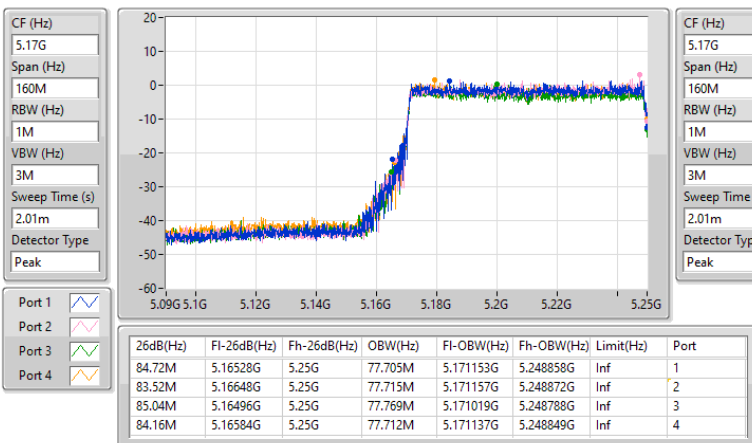


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5250MHz Straddle 5.25-5.35GHz

11/06/2026

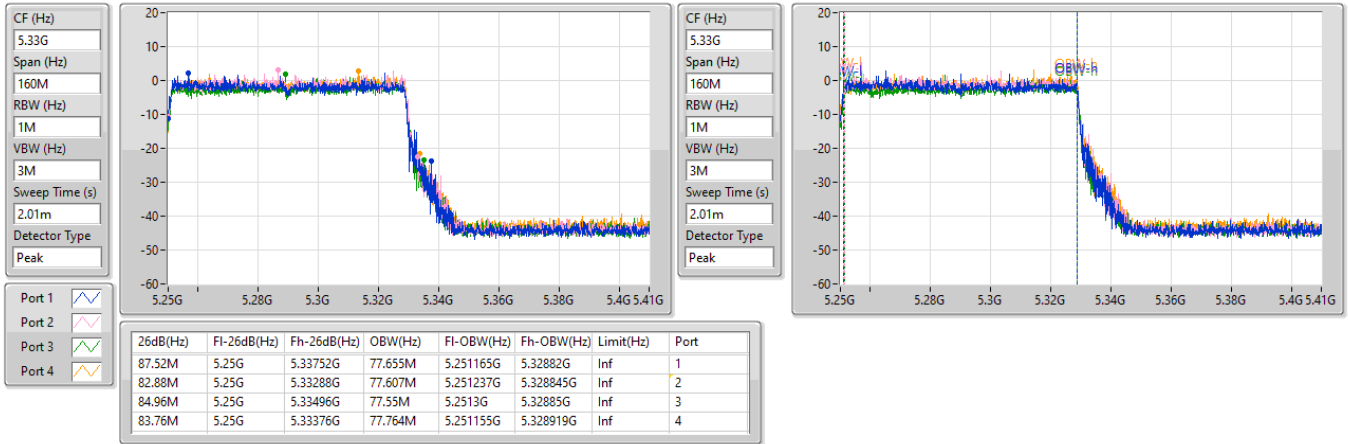

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	84.08M	77.7M	77M7D1D	84.08M	77.7M
5.25-5.35GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	84M	77.737M	77M7D1D	84M	77.737M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


**Result**

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	84.08M	77.7M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	84M	77.737M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX
EBW
5250MHz Straddle 5.15-5.25GHz

12/06/2026

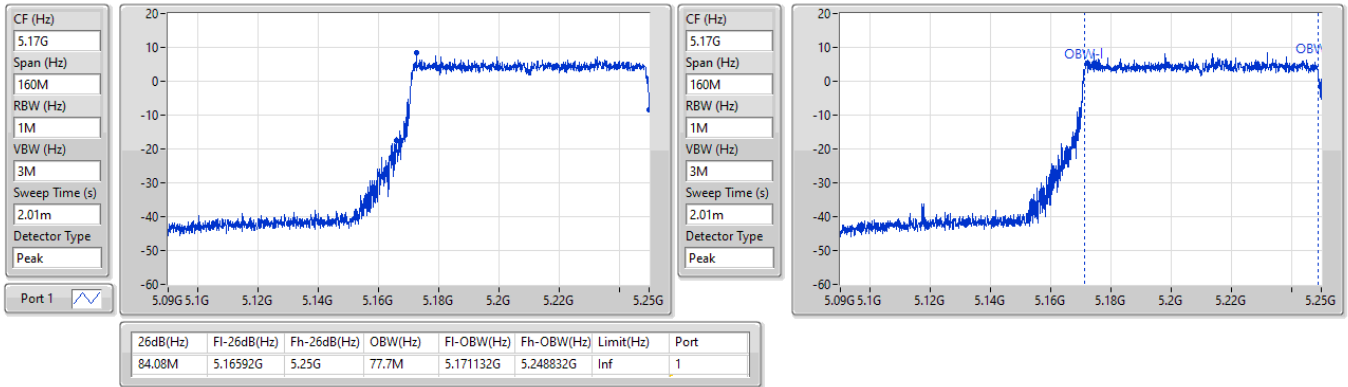
5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX
EBW
5250MHz Straddle 5.25-5.35GHz

12/06/2026

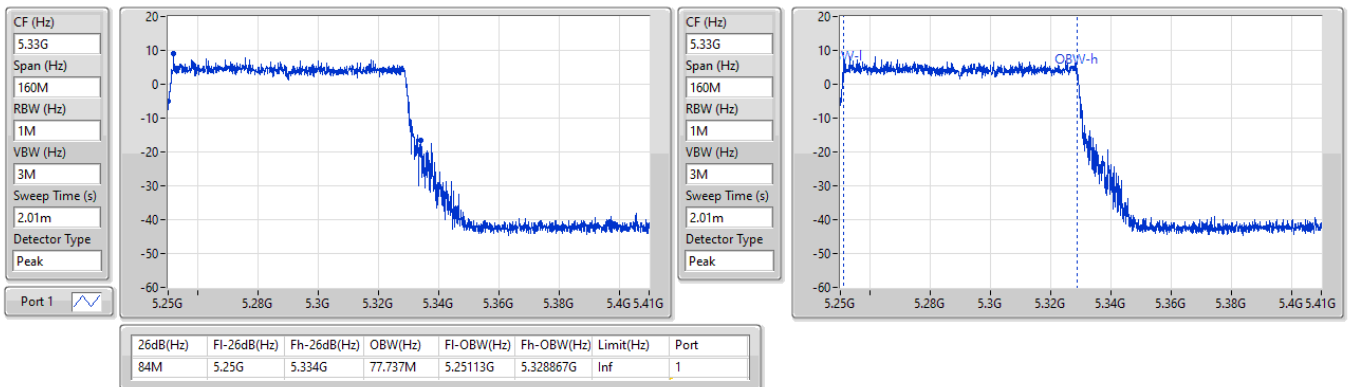

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	84.16M	77.614M	77M6D1D	83.68M	77.614M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	83.2M	77.701M	77M7D1D	82.96M	77.59M
5.25-5.35GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	84.16M	77.662M	77M7D1D	83.92M	77.618M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	84.16M	77.662M	77M7D1D	83.92M	77.618M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	84.16M	77.614M	83.68M	77.614M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	83.92M	77.618M	84.16M	77.662M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	83.2M	77.701M	82.96M	77.59M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	83.92M	77.618M	84.16M	77.662M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz 802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5250MHz Straddle 5.15-5.25GHz

12/06/2026

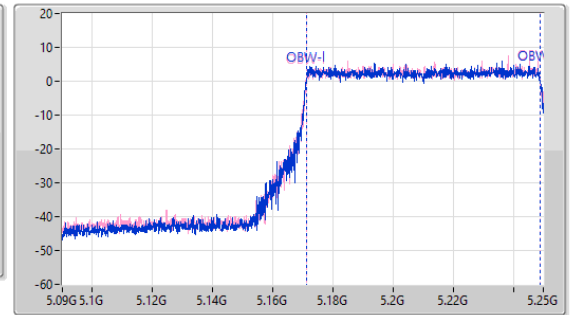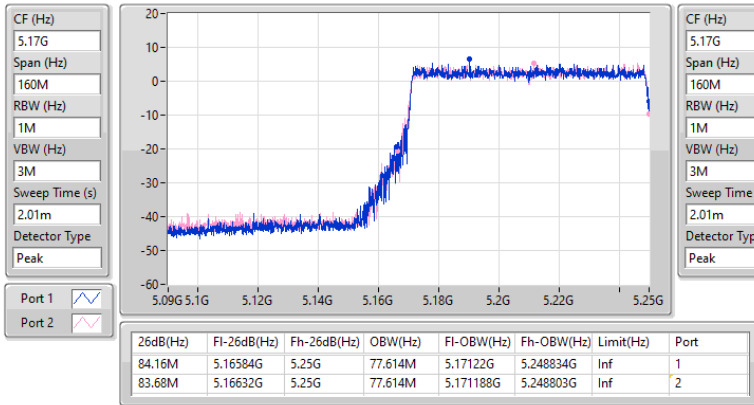
5.25-5.35GHz 802.11be EHT160_Nss1,(MCS0)_2TX
EBW
5250MHz Straddle 5.25-5.35GHz

18/02/2026

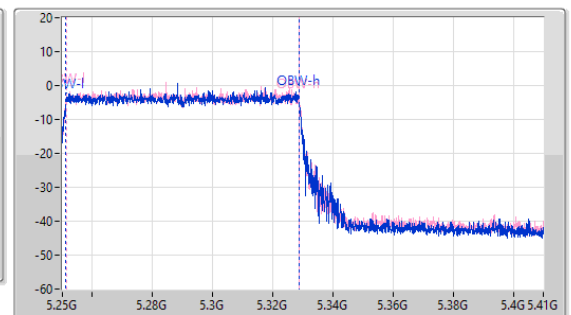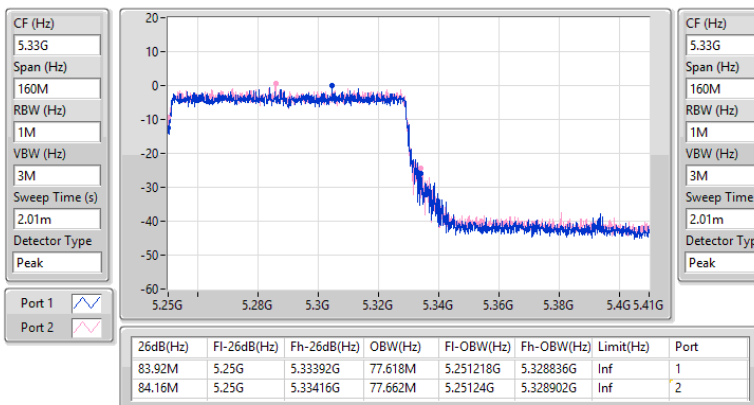

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	84.72M	77.792M	77M8D1D	83.52M	77.621M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	85.52M	77.751M	77M8D1D	83.68M	77.671M
5.25-5.35GHz	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	85.44M	77.648M	77M6D1D	82.72M	77.567M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	86.96M	77.71M	77M7D1D	84.08M	77.612M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	84M	77.621M	83.52M	77.676M	83.6M	77.704M	84.72M	77.792M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	82.72M	77.648M	85.44M	77.567M	84.48M	77.595M	85.12M	77.62M
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	84.4M	77.706M	83.68M	77.751M	84.72M	77.671M	85.52M	77.693M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	86.96M	77.636M	84.08M	77.658M	84.88M	77.612M	85.12M	77.71M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX
EBW
5250MHz Straddle 5.15-5.25GHz

12/06/2026

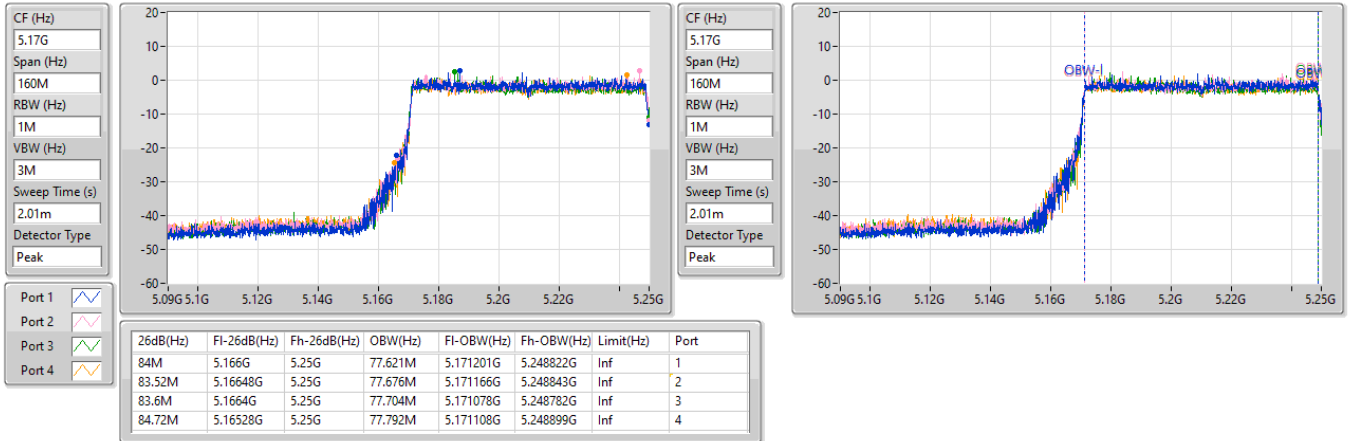
5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX
EBW
5250MHz Straddle 5.25-5.35GHz

12/06/2026

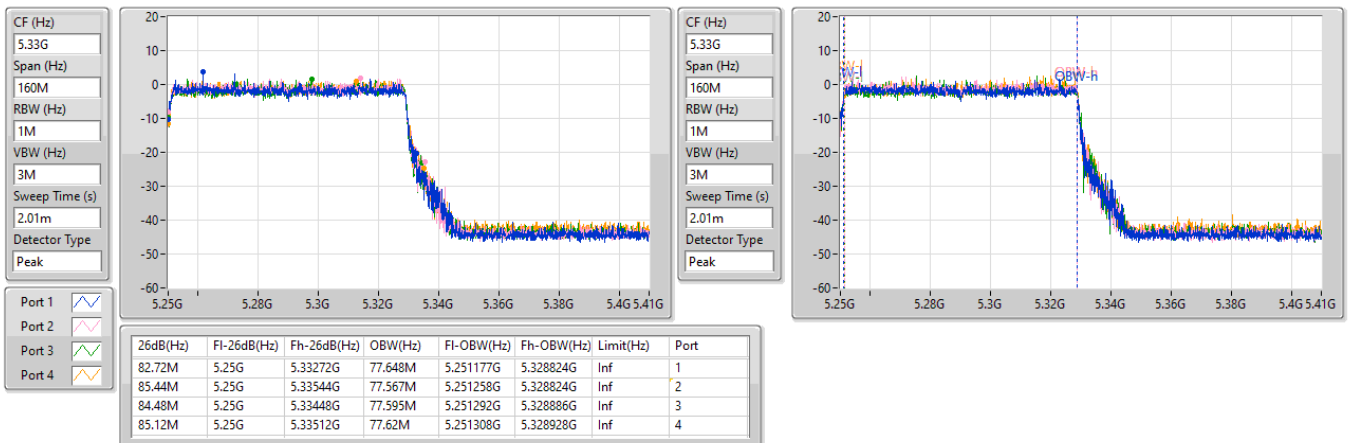

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	13.52	0.02249
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	21.68	0.14723
802.11ax HEW20_Nss1,(MCS0)_2TX	21.56	0.14322
802.11ax HEW40_Nss1,(MCS0)_2TX	22.42	0.17458
802.11ax HEW80_Nss1,(MCS0)_2TX	19.53	0.08974
802.11ax HEW160_Nss1,(MCS0)_2TX	14.37	0.02735

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.06	18.59	18.72	21.67	22.92
5300MHz	Pass	7.06	18.46	18.87	21.68	22.92
5320MHz	Pass	7.06	18.40	18.50	21.46	22.65
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.06	18.50	18.60	21.56	22.92
5300MHz	Pass	7.06	18.23	18.72	21.49	22.92
5320MHz	Pass	7.06	18.26	18.70	21.50	22.92
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	7.06	19.24	19.58	22.42	22.92
5310MHz	Pass	7.06	16.69	17.19	19.96	22.92
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	7.06	16.41	16.62	19.53	22.92
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.49	10.50	10.52	13.52	29.51
5250MHz Straddle 5.25-5.35GHz	Pass	7.06	10.85	11.81	14.37	22.92


DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

23/03/2026

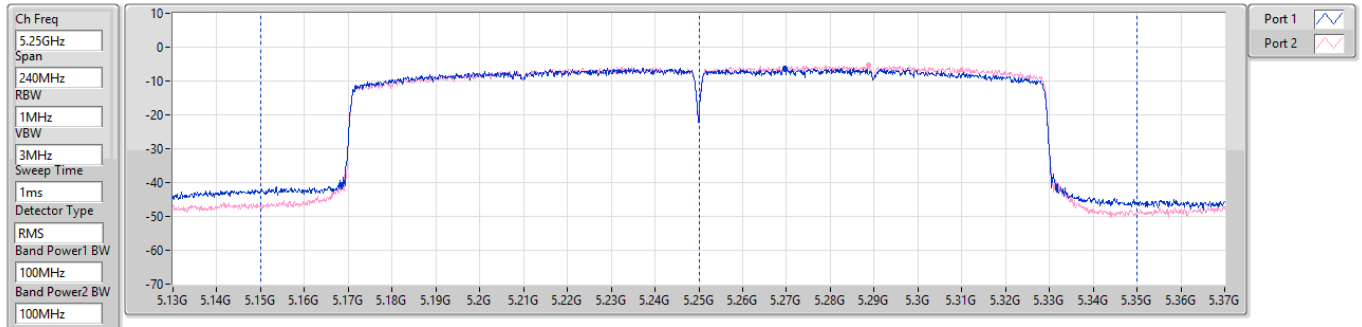

Sum=Total Power
PX=Port X

5150~5250MHz		
Sum(dBm)	P1(dBm)	P2(dBm)
13.52	10.50	10.52

5250~5350MHz		
Sum(dBm)	P1(dBm)	P2(dBm)
14.37	10.85	11.81

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP [Phi 30°] (dBm)	EIRP [Phi 30°] (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	13.52	0.02249	14.52	0.028314
5.25-5.35GHz	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	14.37	0.02735	Inf	Inf



Average Power_Mode 2

Appendix C.2

Result

Mode	Result	DG/Gain [Phi 30°] (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP [Phi 30°] (dBm)	EIRP Limit [Phi 30°] (dBm)
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.49/1.00	10.50	10.52	13.52	29.51	14.52	21.00
5250MHz Straddle 5.25-5.35GHz	Pass	7.06	10.85	11.81	14.37	22.92	Inf	Inf


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

23/03/2026

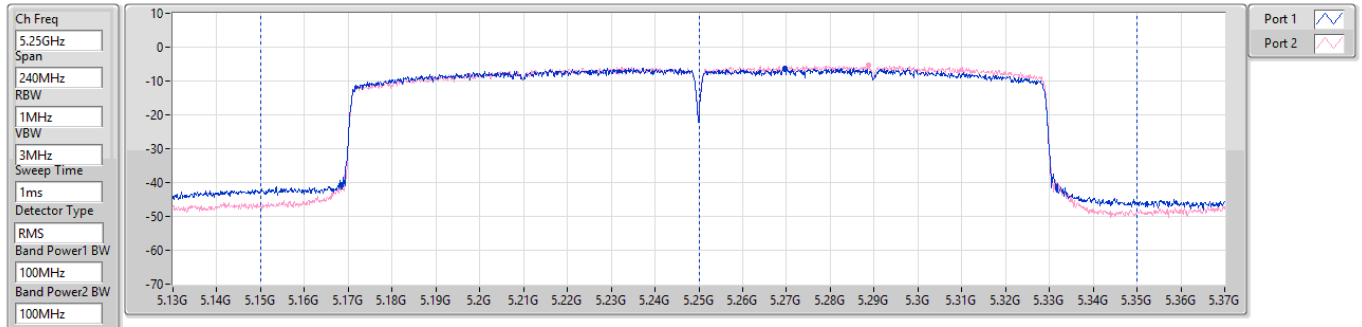

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
13.52	10.50	10.52

5250~5350MHz

Sum(dBm)	P1(dBm)	P2(dBm)
14.37	10.85	11.81

Summary

Mode	Total Power (dBm)	Total Power (W)
5.15-5.25GHz	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	15.87	0.03864
802.11be EHT160_Nss1,(MCS0)_2TX	16.87	0.04864
802.11be EHT160_Nss1,(MCS0)_4TX	15.64	0.03664
802.11be EHT160-BF_Nss1,(MCS0)_2TX	16.87	0.04864
802.11be EHT160-BF_Nss1,(MCS0)_4TX	15.64	0.03664
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	23.68	0.23335
802.11a_Nss1,(6Mbps)_2TX	23.76	0.23768
802.11a_Nss1,(6Mbps)_4TX	21.04	0.12706
802.11be EHT20_Nss1,(MCS0)_1TX	23.87	0.24378
802.11be EHT20_Nss1,(MCS0)_2TX	23.83	0.24155
802.11be EHT20_Nss1,(MCS0)_4TX	21.67	0.14689
802.11be EHT20-BF_Nss1,(MCS0)_2TX	23.83	0.24155
802.11be EHT20-BF_Nss1,(MCS0)_4TX	20.83	0.12106
802.11be EHT40_Nss1,(MCS0)_1TX	23.58	0.22803
802.11be EHT40_Nss1,(MCS0)_2TX	23.65	0.23174
802.11be EHT40_Nss1,(MCS0)_4TX	23.33	0.21528
802.11be EHT40-BF_Nss1,(MCS0)_2TX	23.65	0.23174
802.11be EHT40-BF_Nss1,(MCS0)_4TX	20.60	0.11482
802.11be EHT80_Nss1,(MCS0)_1TX	22.30	0.16982
802.11be EHT80_Nss1,(MCS0)_2TX	23.62	0.23014
802.11be EHT80_Nss1,(MCS0)_4TX	23.42	0.21979
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.62	0.23014
802.11be EHT80-BF_Nss1,(MCS0)_4TX	20.76	0.11912
802.11be EHT160_Nss1,(MCS0)_1TX	15.74	0.03750
802.11be EHT160_Nss1,(MCS0)_2TX	17.02	0.05035
802.11be EHT160_Nss1,(MCS0)_4TX	15.97	0.03954
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.02	0.05035
802.11be EHT160-BF_Nss1,(MCS0)_4TX	15.97	0.03954



Average Power_Mode 3

Appendix C.3

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	23.59				23.59	23.91
5300MHz	Pass	6.07	23.68				23.68	23.91
5320MHz	Pass	6.07	19.90				19.90	23.91
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	23.75				23.75	23.91
5300MHz	Pass	6.07	23.87				23.87	23.91
5320MHz	Pass	6.07	21.64				21.64	23.91
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5270MHz	Pass	6.07	23.58				23.58	23.91
5310MHz	Pass	6.07	21.69				21.69	23.91
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	22.30				22.30	23.91
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	15.87				15.87	29.95
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	15.74				15.74	23.91
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	20.67	20.82			23.76	23.91
5300MHz	Pass	6.07	20.80	20.68			23.75	23.91
5320MHz	Pass	6.07	17.32	17.25			20.30	23.91
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	20.34	20.66			23.51	23.91
5300MHz	Pass	6.07	20.51	20.54			23.54	23.91
5320MHz	Pass	6.07	20.61	21.02			23.83	23.91
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5270MHz	Pass	6.07	20.53	20.74			23.65	23.91
5310MHz	Pass	6.07	18.27	18.97			21.64	23.91
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	20.42	20.79			23.62	23.91
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	13.77	13.95			16.87	29.95
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	13.66	14.33			17.02	23.91
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.22	14.88	15.00	14.67	15.08	20.93	23.76
5300MHz	Pass	6.22	15.02	15.00	14.71	15.07	20.97	23.76
5320MHz	Pass	6.22	15.06	15.14	14.63	15.21	21.04	23.76
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.22	15.55	15.70	15.31	15.81	21.62	23.76
5300MHz	Pass	6.22	15.42	15.58	15.32	15.69	21.53	23.76
5320MHz	Pass	6.22	15.64	15.74	15.23	15.95	21.67	23.76
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5270MHz	Pass	6.22	17.13	17.41	17.23	17.45	23.33	23.76
5310MHz	Pass	6.22	17.16	17.88	16.75	17.34	23.32	23.76
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.22	17.47	17.73	16.83	17.52	23.42	23.76
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	9.81	9.86	9.38	9.39	15.64	29.95
5250MHz Straddle 5.25-5.35GHz	Pass	6.22	9.70	10.22	9.69	10.16	15.97	23.76
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	20.34	20.66			23.51	23.91
5300MHz	Pass	6.07	20.51	20.54			23.54	23.91
5320MHz	Pass	6.07	20.61	21.02			23.83	23.91
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5270MHz	Pass	6.07	20.53	20.74			23.65	23.91
5310MHz	Pass	6.07	18.27	18.97			21.64	23.91



Average Power_Mode 3

Appendix C.3

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	20.42	20.79			23.62	23.91
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	13.77	13.95			16.87	29.95
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	13.66	14.33			17.02	23.91
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	9.05	14.48	14.78	14.22	14.67	20.56	20.93
5300MHz	Pass	9.05	14.64	14.67	14.38	14.73	20.63	20.93
5320MHz	Pass	9.05	14.82	14.93	14.37	15.10	20.83	20.93
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5270MHz	Pass	9.05	14.42	14.70	14.23	14.51	20.49	20.93
5310MHz	Pass	9.05	14.59	15.13	14.12	14.40	20.60	20.93
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	9.05	14.93	15.18	14.29	14.52	20.76	20.93
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	9.81	9.86	9.38	9.39	15.64	27.18
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	9.70	10.22	9.69	10.16	15.97	20.93


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

11/06/2026

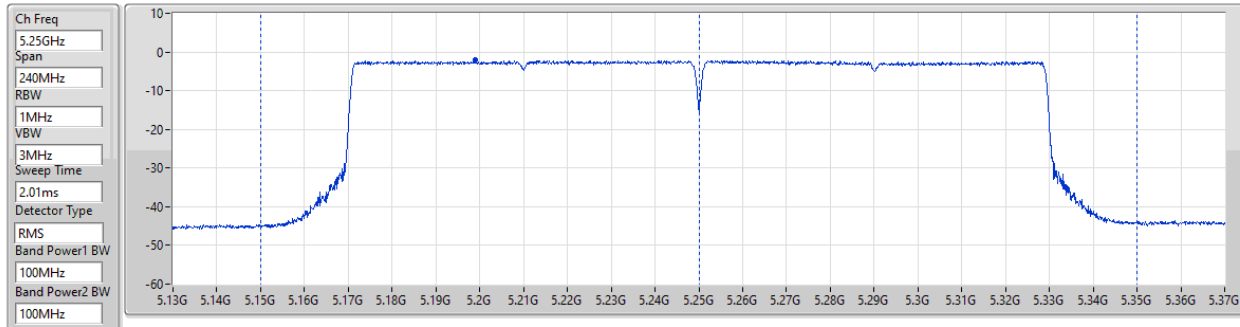

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)
15.87	15.87

5250~5350MHz


Sum(dBm)	P1(dBm)
15.74	15.74

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

11/06/2026

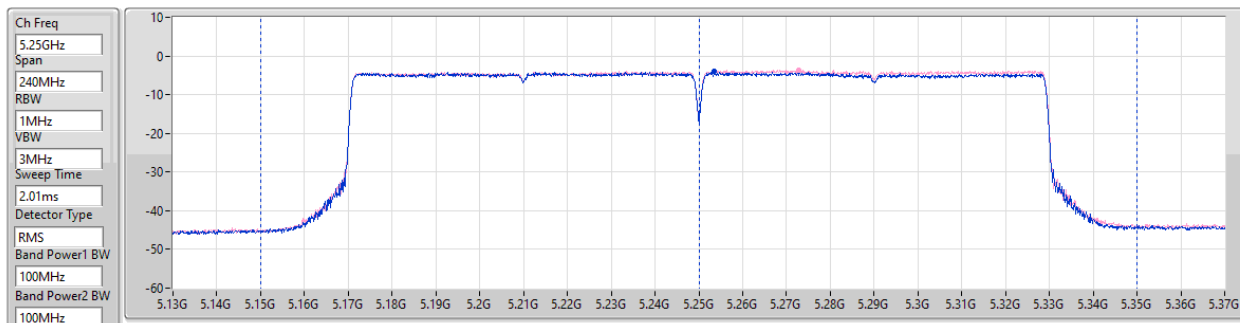


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
16.87	13.77	13.95

5250~5350MHz

Sum(dBm)	P1(dBm)	P2(dBm)
17.02	13.66	14.33

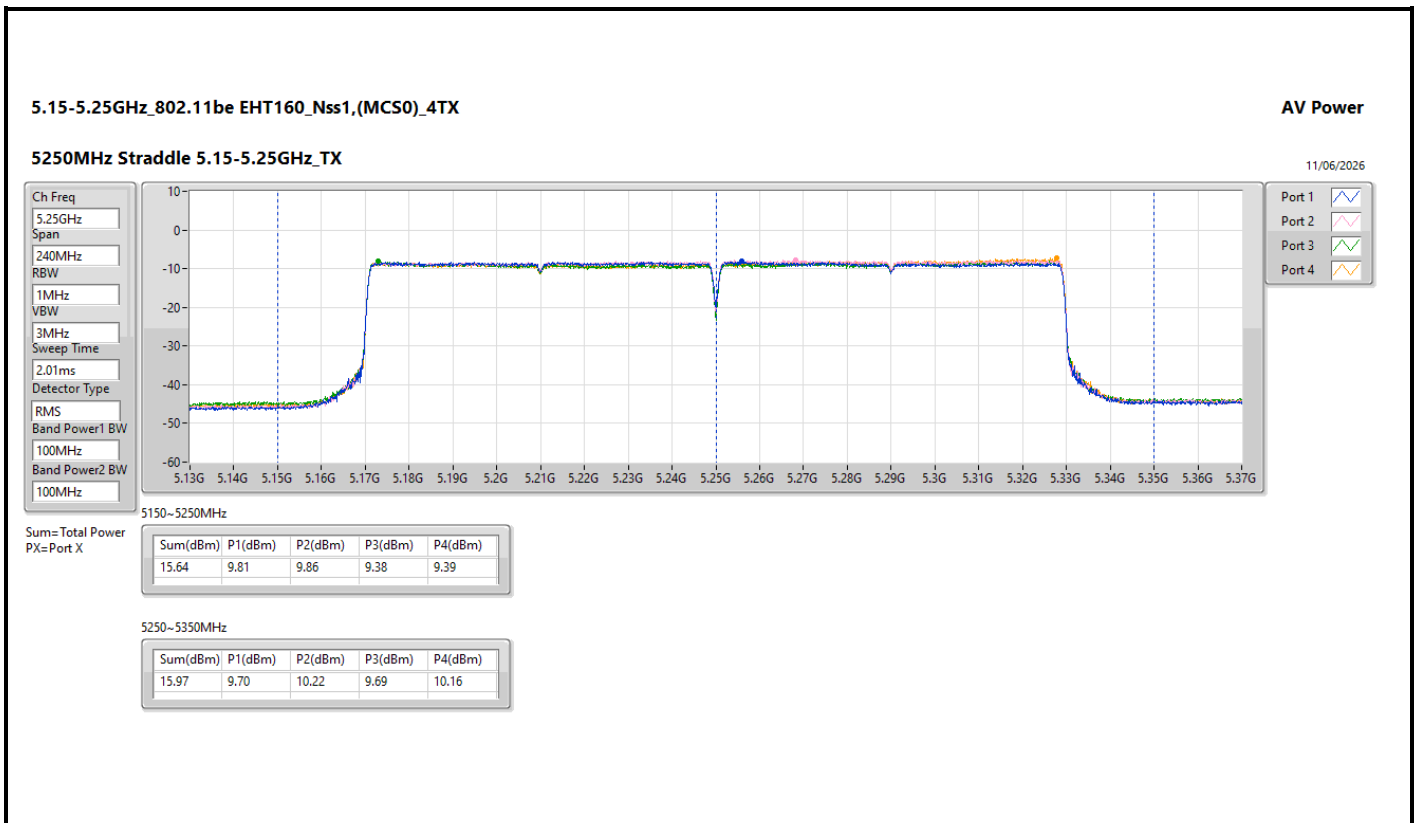

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	16.01	0.03990	22.06/17.81	0.16069/0.060395
5.25-5.35GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	15.87	0.03864	21.94	0.15631




Average Power_Mode 4

Appendix C.4

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05/1.80	16.01	16.01	29.95	22.06/17.81	36.00/21.00
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	15.87	15.87	23.91	21.94	Inf

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

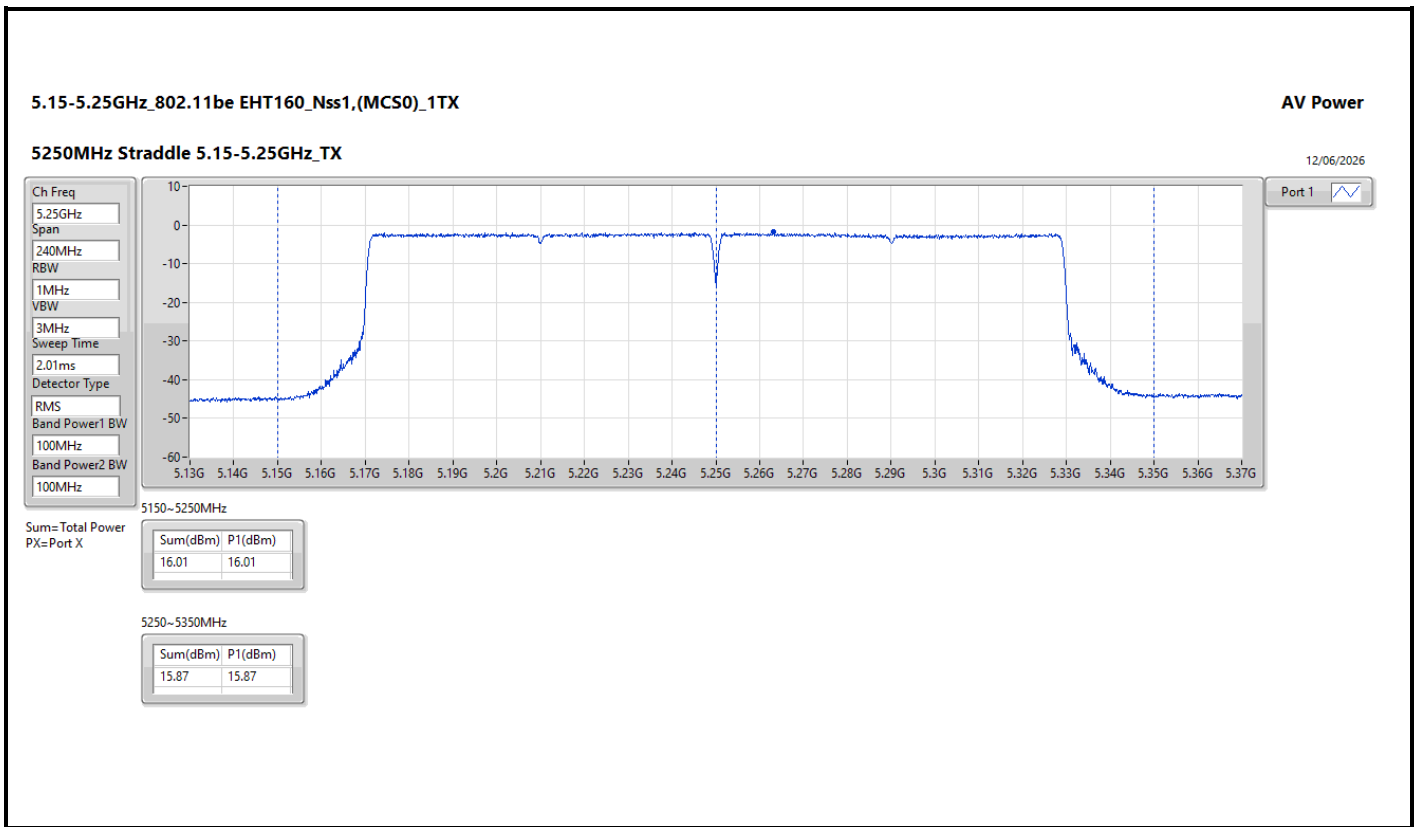

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	16.95	0.04955	23.00/18.75	0.19953/0.074989
802.11be EHT160-BF_Nss1,(MCS0)_2TX	16.95	0.04955	23.00/18.75	0.19953/0.074989
5.25-5.35GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	17.06	0.05082	23.13	0.20559
802.11be EHT160-BF_Nss1,(MCS0)_2TX	17.06	0.05082	23.13	0.20559



Average Power_Mode 5

Appendix C.5

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05/1.80	13.85	14.02	16.95	29.95	23.00/18.75	36.00/21.00
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	13.70	14.38	17.06	23.91	23.13	Inf
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05/1.80	13.85	14.02	16.95	29.95	23.00/18.75	36.00/21.00
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	13.70	14.38	17.06	23.91	23.13	Inf


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

12/06/2026

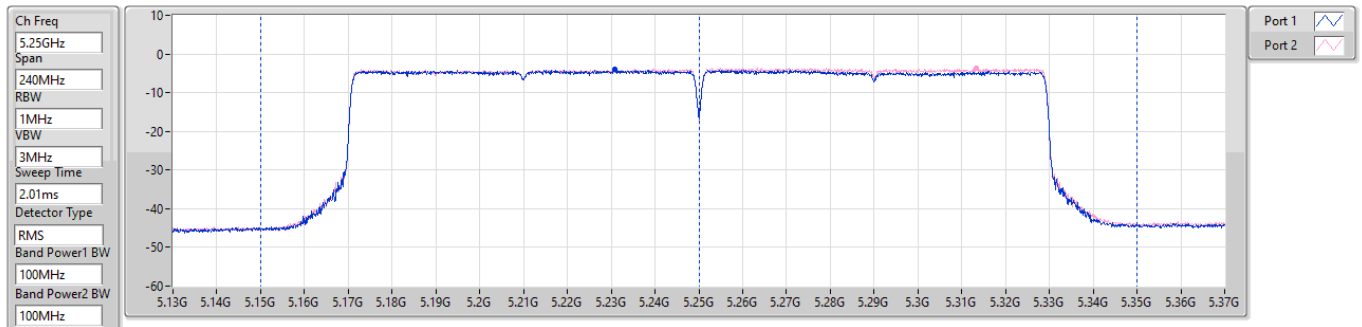

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
16.95	13.85	14.02

5250~5350MHz

Sum(dBm)	P1(dBm)	P2(dBm)
17.06	13.70	14.38

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	15.55	0.03589	21.60/17.75	0.14454/0.059566
802.11be EHT160-BF_Nss1,(MCS0)_4TX	15.55	0.03589	24.37/20.15	0.27353/0.103514
5.25-5.35GHz	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	15.88	0.03873	22.10	0.16218
802.11be EHT160-BF_Nss1,(MCS0)_4TX	15.88	0.03873	24.93	0.31117



Average Power_Mode 6

Appendix C.6

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05/2.20	9.84	9.76	9.27	9.20	15.55	29.95	21.60/17.75	36.00/21.00
5250MHz Straddle 5.25-5.35GHz	Pass	6.22	9.70	10.06	9.59	10.08	15.88	23.76	22.10	Inf
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82/4.60	9.84	9.76	9.27	9.20	15.55	27.18	24.37/20.15	36.00/21.00
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	9.70	10.06	9.59	10.08	15.88	20.93	24.93	Inf


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

12/06/2026

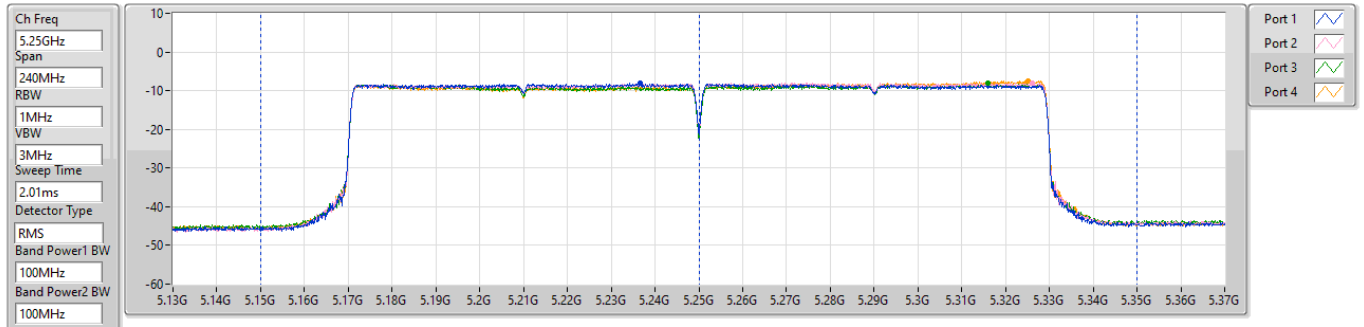

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
15.55	9.84	9.76	9.27	9.20

5250~5350MHz

Sum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
15.88	9.70	10.06	9.59	10.08

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW160_Nss1,(MCS0)_2TX	-3.86
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.90
802.11ax HEW20_Nss1,(MCS0)_2TX	9.83
802.11ax HEW40_Nss1,(MCS0)_2TX	7.79
802.11ax HEW80_Nss1,(MCS0)_2TX	1.79
802.11ax HEW160_Nss1,(MCS0)_2TX	-3.29

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.06	6.83	6.96	9.90	9.94
5300MHz	Pass	7.06	6.63	7.04	9.73	9.94
5320MHz	Pass	7.06	6.64	6.74	9.59	9.94
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5260MHz	Pass	7.06	6.89	7.00	9.83	9.94
5300MHz	Pass	7.06	6.28	6.85	9.52	9.94
5320MHz	Pass	7.06	6.44	6.72	9.47	9.94
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5270MHz	Pass	7.06	4.73	5.05	7.79	9.94
5310MHz	Pass	7.06	1.79	2.69	5.18	9.94
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5290MHz	Pass	7.06	-1.55	-0.74	1.79	9.94
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.49	-6.72	-6.64	-3.86	16.51
5250MHz Straddle 5.25-5.35GHz	Pass	7.06	-6.66	-5.76	-3.29	9.94

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

21/03/2026

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20.395
Detector Type
RMS

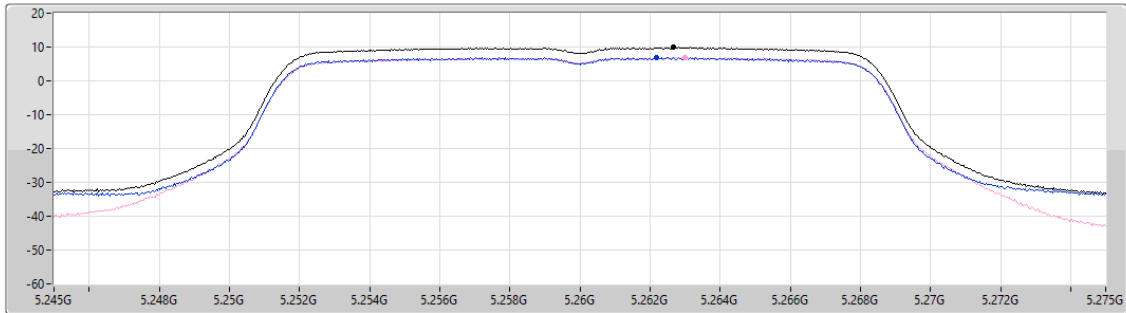

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.90	9.90	6.83	6.96


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

21/03/2026

CF (Hz)
5.3G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
20.395
Detector Type
RMS

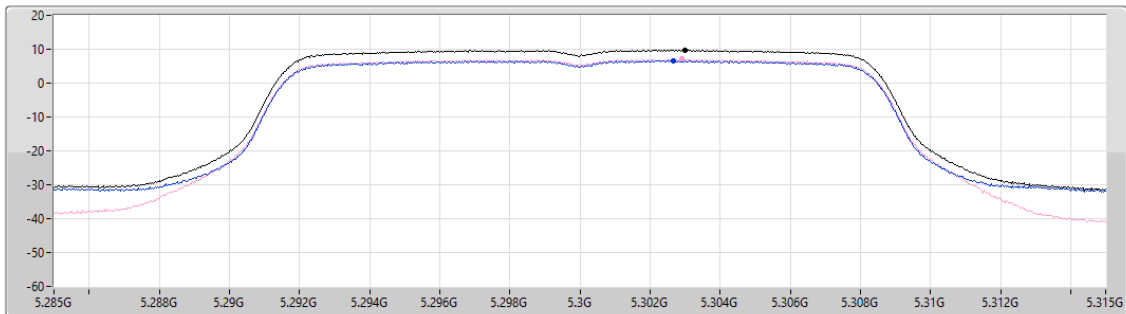

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.73	9.73	6.63	7.04

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

21/03/2026

CF (Hz)
5.32G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20.395

Detector Type
RMS

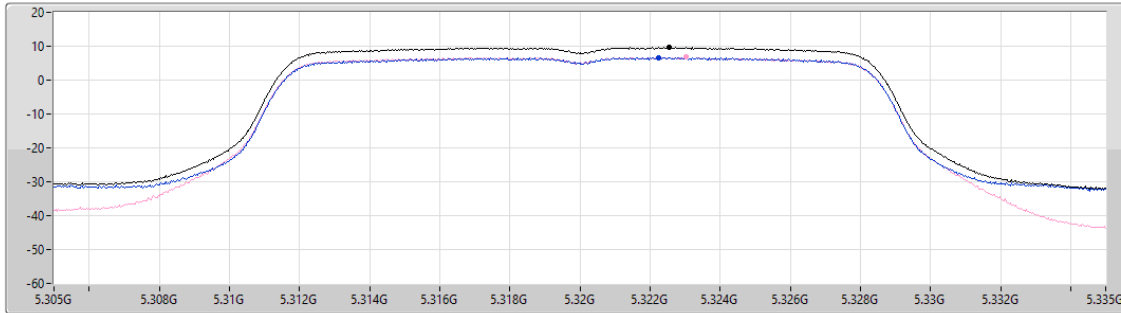

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.59	9.59	6.64	6.74

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5260MHz

23/03/2026

CF (Hz)
5.26G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

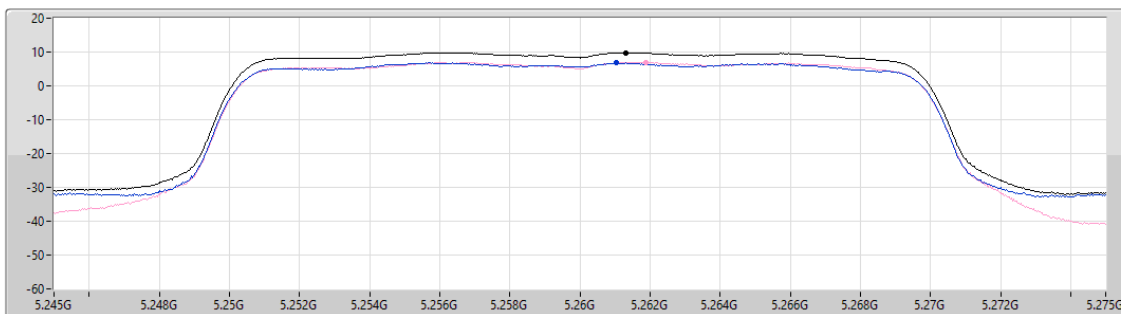

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.83	9.83	6.89	7.00

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5300MHz

23/03/2026

CF (Hz)
5.3G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

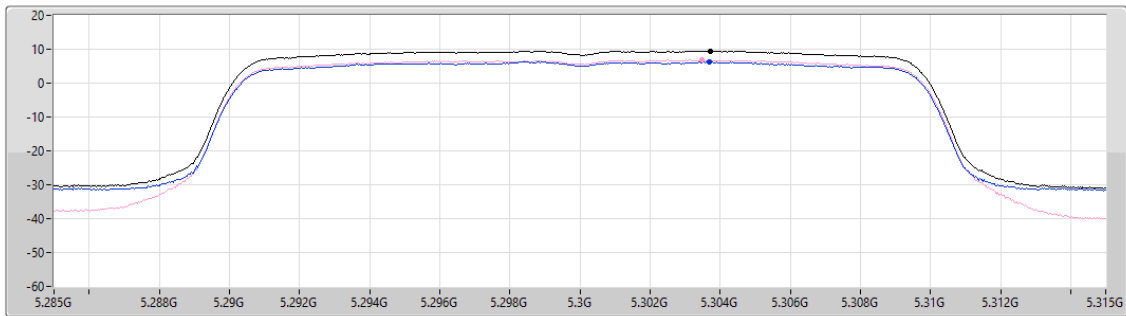

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.52	9.52	6.28	6.85

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5320MHz

23/03/2026

CF (Hz)
5.32G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

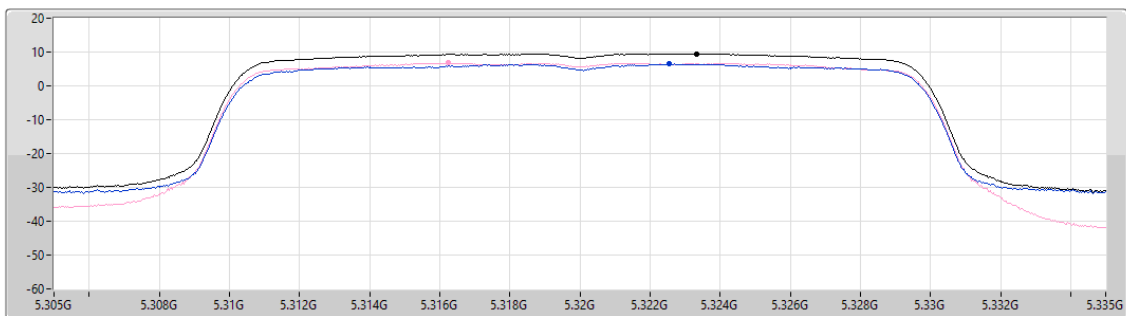

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.47	9.47	6.44	6.72

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

5270MHz

23/03/2026

CF (Hz)
5.27G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

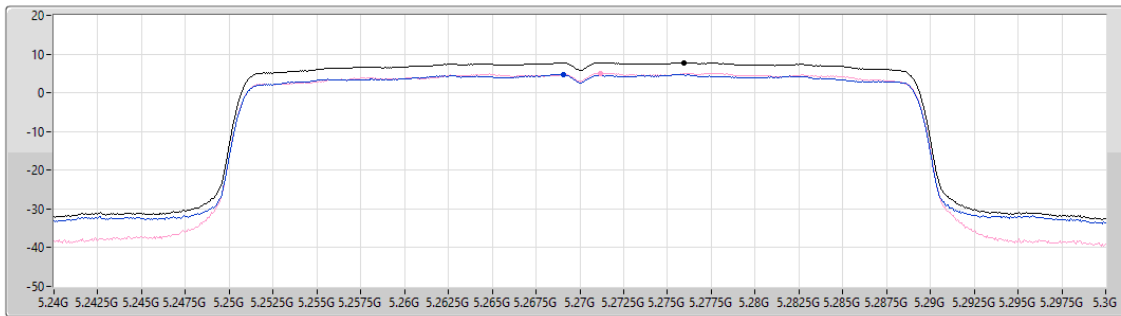

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.79	7.79	4.73	5.05

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

5310MHz

23/03/2026

CF (Hz)
5.31G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

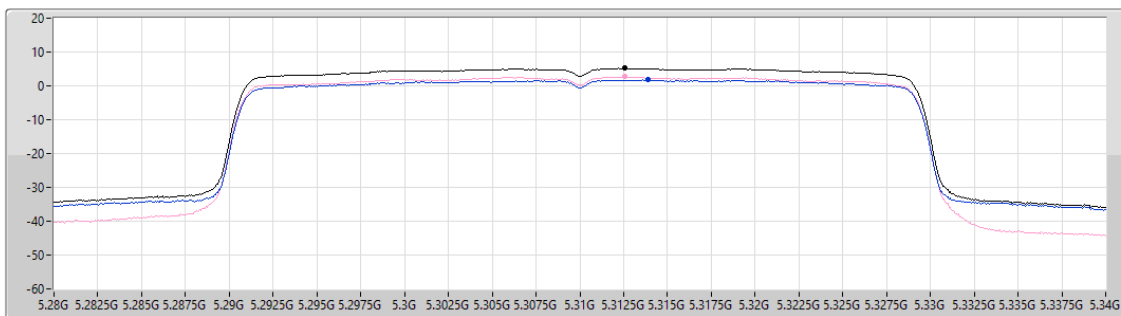

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.18	5.18	1.79	2.69

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5290MHz

23/03/2026

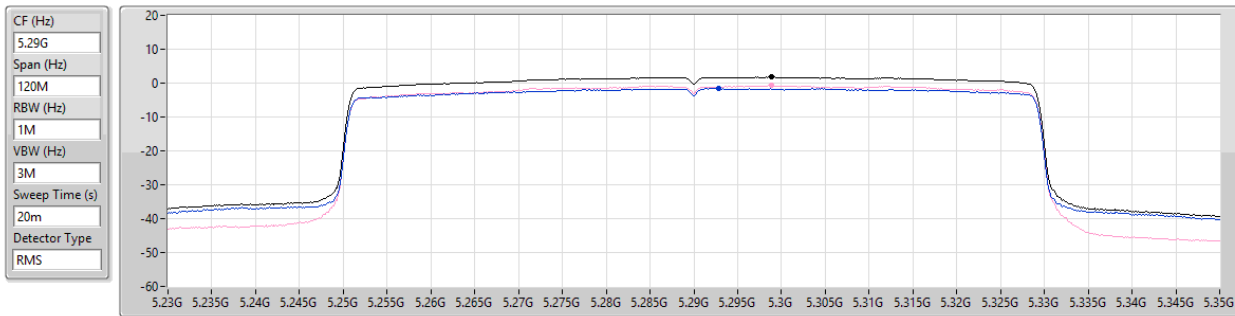


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.79	1.79	-1.55	-0.74

5.15-5.25GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

23/03/2026

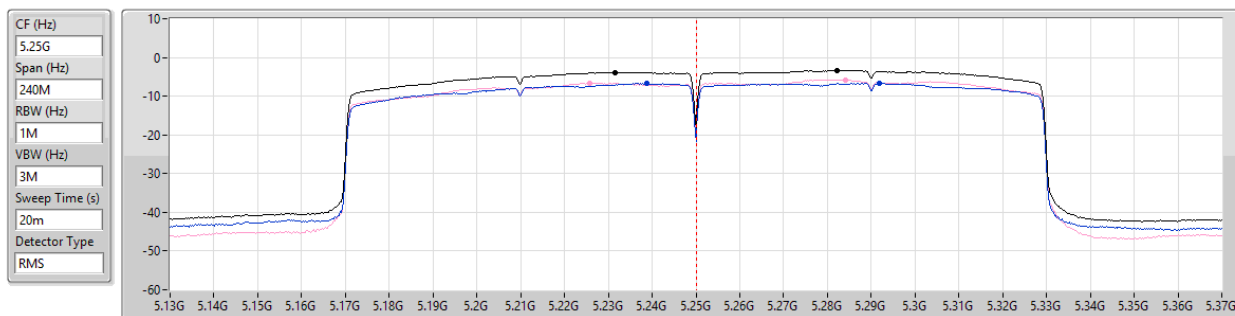

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.86	-3.86	-6.72	-6.64

5150~5250MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.29	-3.29	-6.66	-5.76



Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW160_Nss1,(MCS0)_2TX	-3.86
5.25-5.35GHz	-
802.11ax HEW160_Nss1,(MCS0)_2TX	-3.29


RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.49	-6.72	-6.64	-3.86	16.51
5250MHz Straddle 5.25-5.35GHz	Pass	7.06	-6.66	-5.76	-3.29	9.94

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

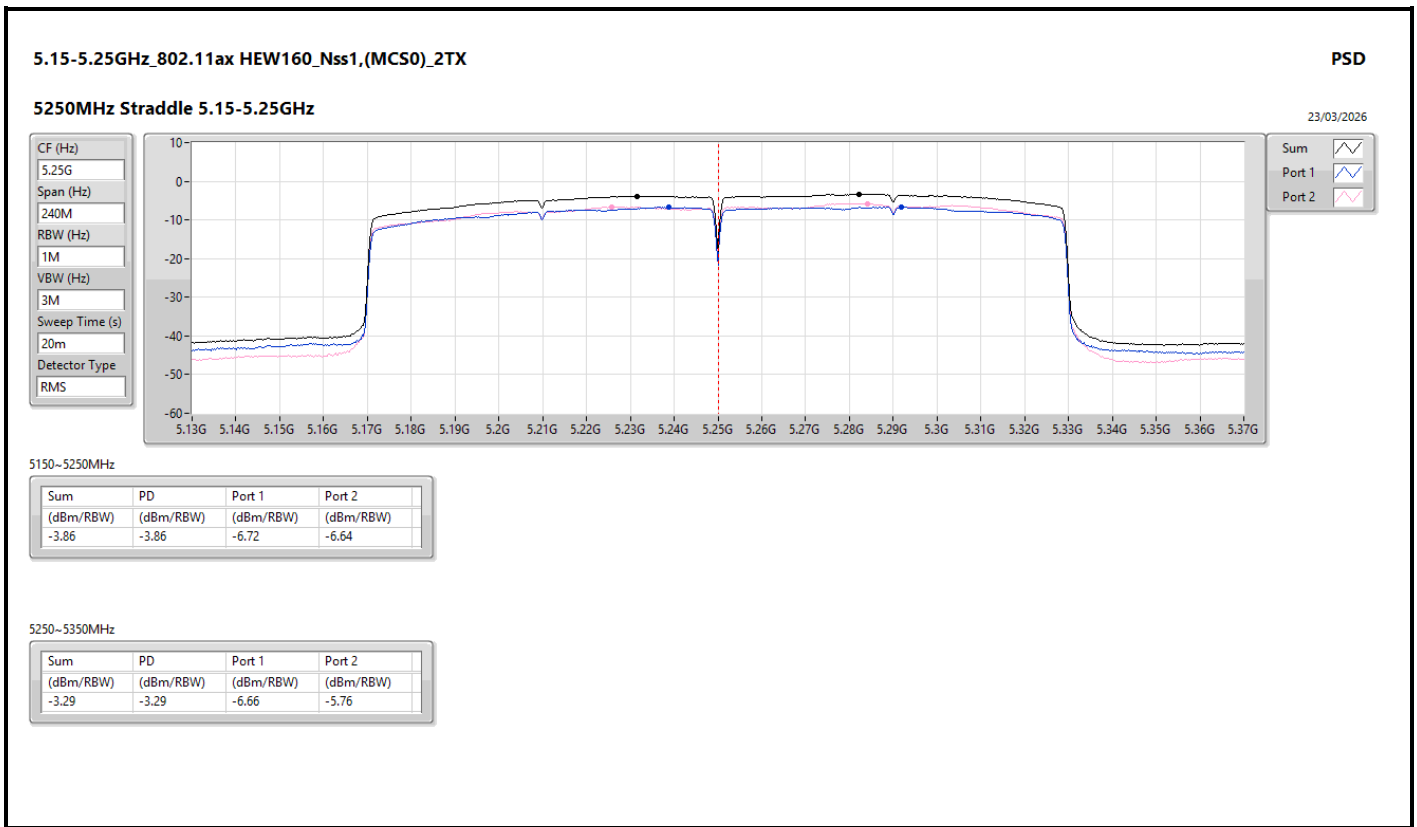

Summary


Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT160_Nss1,(MCS0)_1TX	-4.03
802.11be EHT160_Nss1,(MCS0)_2TX	-2.99
802.11be EHT160_Nss1,(MCS0)_4TX	-4.20
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.50
802.11a_Nss1,(6Mbps)_2TX	10.61
802.11a_Nss1,(6Mbps)_4TX	7.70
802.11be EHT20_Nss1,(MCS0)_1TX	9.99
802.11be EHT20_Nss1,(MCS0)_2TX	9.78
802.11be EHT20_Nss1,(MCS0)_4TX	7.79
802.11be EHT40_Nss1,(MCS0)_1TX	7.53
802.11be EHT40_Nss1,(MCS0)_2TX	6.91
802.11be EHT40_Nss1,(MCS0)_4TX	6.59
802.11be EHT80_Nss1,(MCS0)_1TX	2.24
802.11be EHT80_Nss1,(MCS0)_2TX	3.23
802.11be EHT80_Nss1,(MCS0)_4TX	3.15
802.11be EHT160_Nss1,(MCS0)_1TX	-3.99
802.11be EHT160_Nss1,(MCS0)_2TX	-2.81
802.11be EHT160_Nss1,(MCS0)_4TX	-3.92

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	10.42				10.42	10.93
5300MHz	Pass	6.07	10.50				10.50	10.93
5320MHz	Pass	6.07	6.70				6.70	10.93
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	9.99				9.99	10.93
5300MHz	Pass	6.07	9.93				9.93	10.93
5320MHz	Pass	6.07	7.54				7.54	10.93
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5270MHz	Pass	6.07	7.53				7.53	10.93
5310MHz	Pass	6.07	4.52				4.52	10.93
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	2.24				2.24	10.93
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.03				-4.03	16.95
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-3.99				-3.99	10.93
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	7.53	7.70			10.61	10.93
5300MHz	Pass	6.07	7.61	7.54			10.54	10.93
5320MHz	Pass	6.07	4.08	4.04			7.04	10.93
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5260MHz	Pass	6.07	6.70	6.92			9.78	10.93
5300MHz	Pass	6.07	6.62	6.80			9.69	10.93
5320MHz	Pass	6.07	6.57	6.90			9.73	10.93
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5270MHz	Pass	6.07	3.91	4.00			6.91	10.93
5310MHz	Pass	6.07	0.81	1.59			4.04	10.93
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	0.22	0.47			3.23	10.93
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.05	-5.74			-2.99	16.95
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-5.99	-5.54			-2.81	10.93
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	9.05	1.59	1.80	1.54	2.05	7.68	7.95
5300MHz	Pass	9.05	1.70	1.74	1.46	1.97	7.66	7.95
5320MHz	Pass	9.05	1.62	1.89	1.49	2.10	7.70	7.95
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5260MHz	Pass	9.05	1.70	1.80	1.52	2.15	7.78	7.95
5300MHz	Pass	9.05	1.49	1.78	1.52	2.01	7.62	7.95
5320MHz	Pass	9.05	1.78	1.91	1.39	2.26	7.79	7.95
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5270MHz	Pass	9.05	0.40	0.63	0.48	1.03	6.59	7.95
5310MHz	Pass	9.05	-0.07	0.75	-0.34	0.26	6.13	7.95
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	9.05	-2.70	-2.51	-3.30	-2.39	3.15	7.95
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-10.08	-9.87	-10.12	-10.23	-4.20	14.18
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-9.99	-9.66	-9.98	-9.29	-3.92	7.95

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

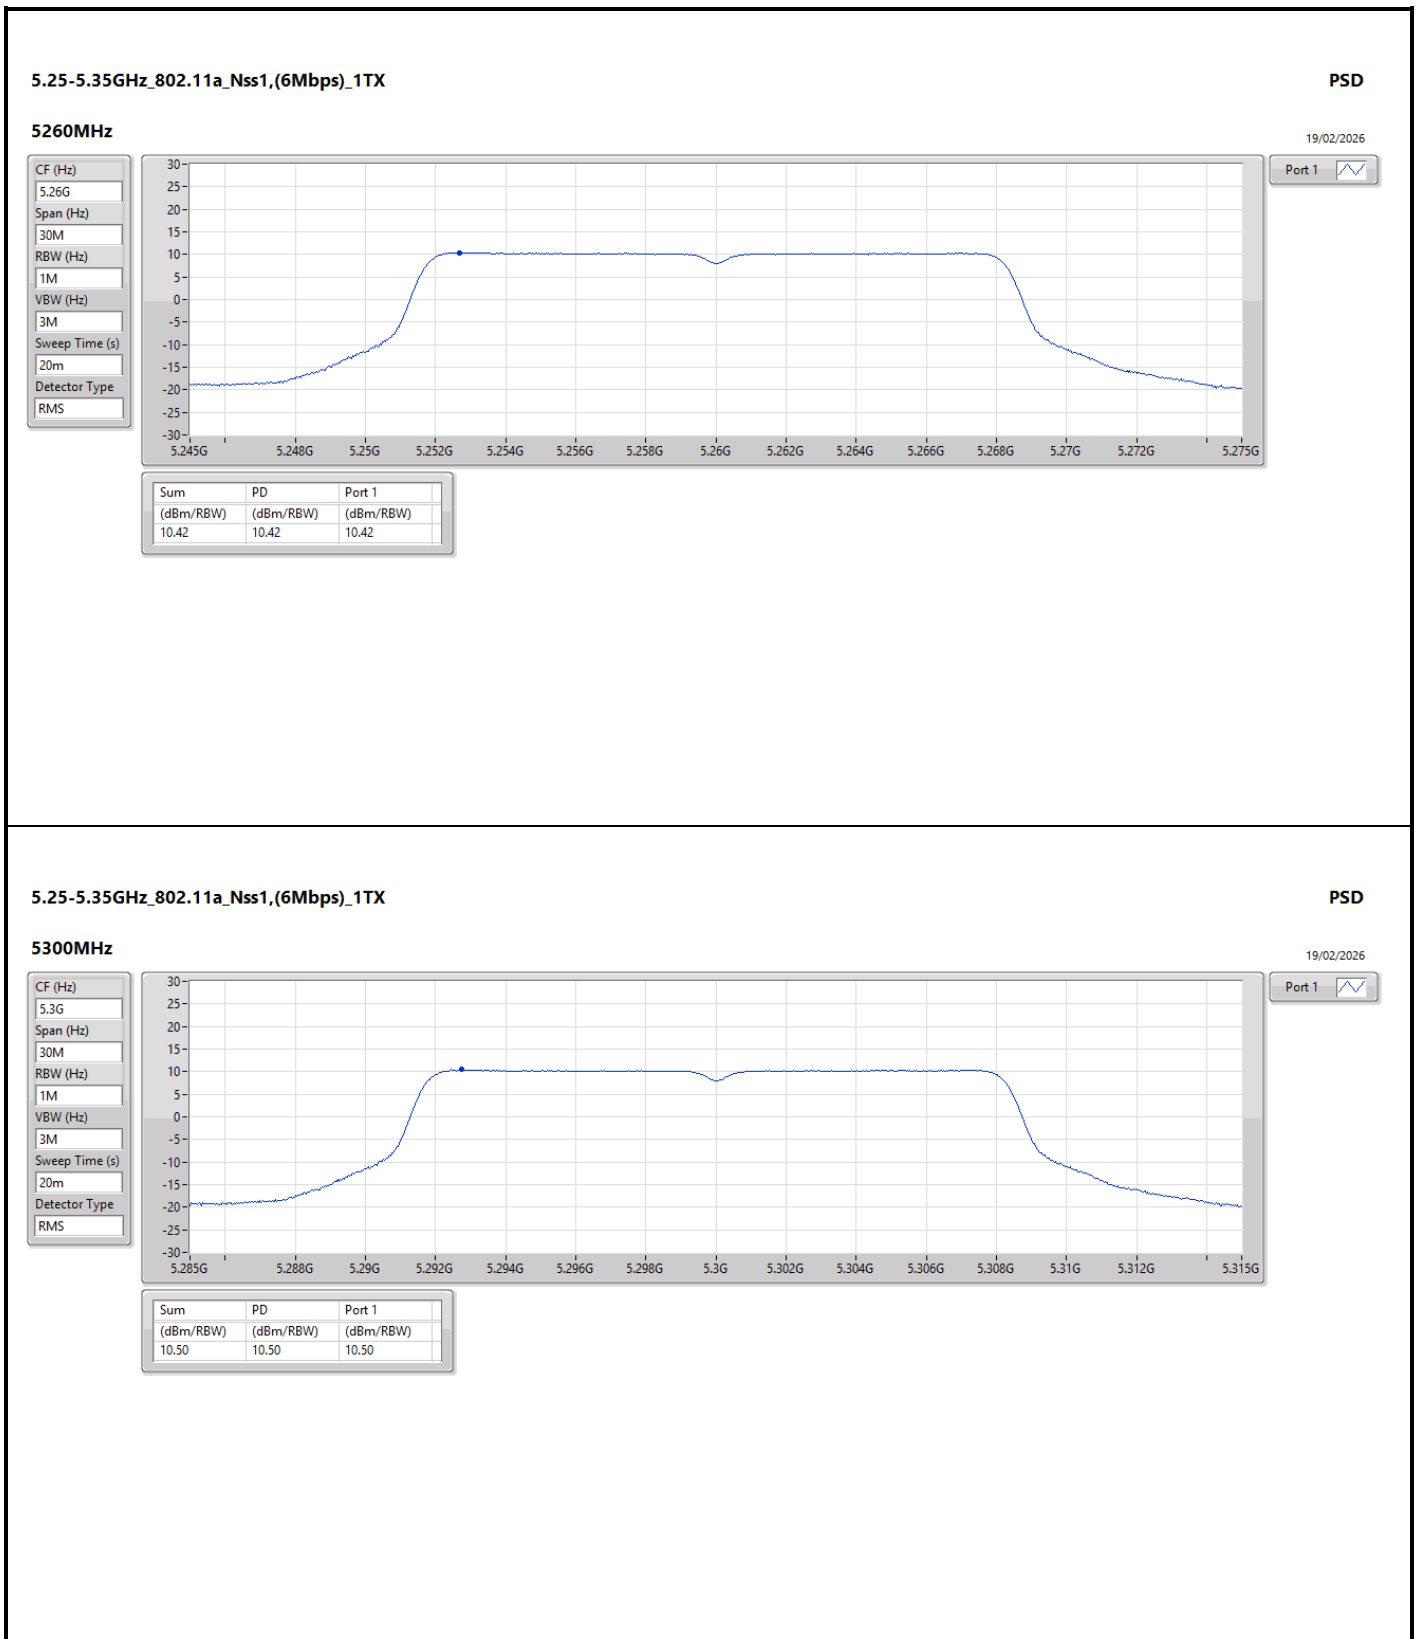
5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX
PSD
5300MHz
19/02/2026

CF (Hz)
5.3G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

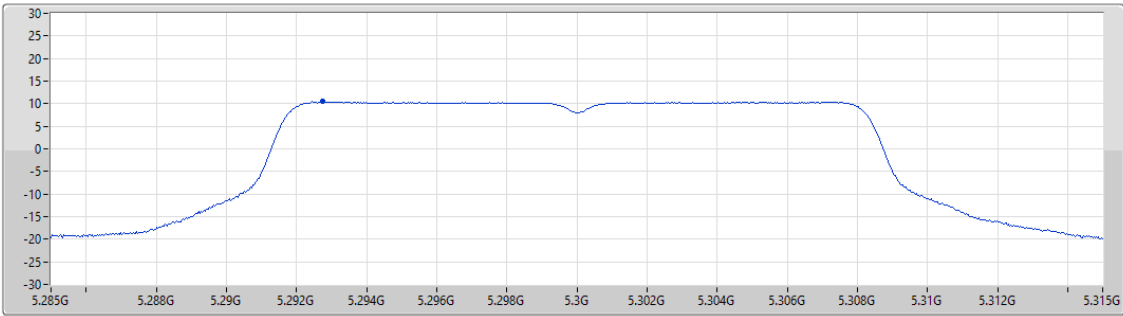

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.50	10.50	10.50


Port 1

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5320MHz

18/02/2026

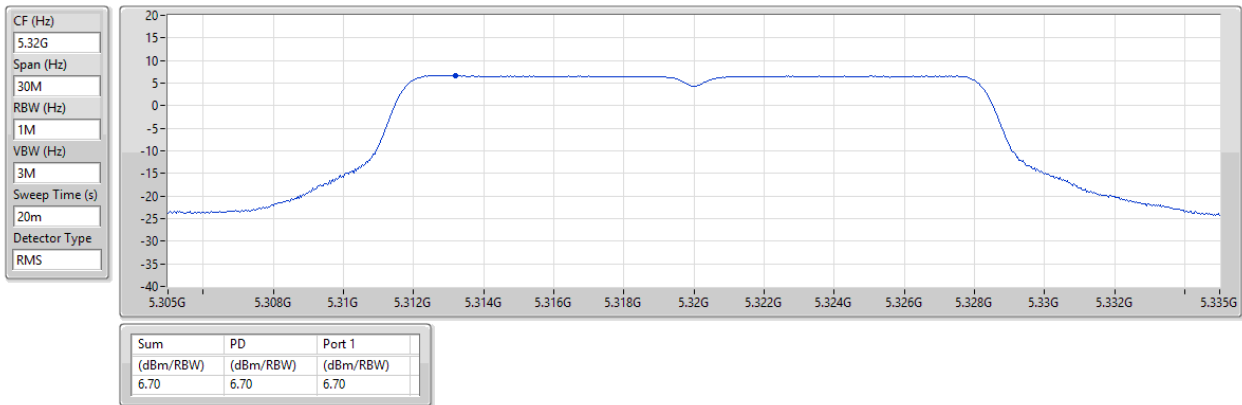


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5260MHz

19/02/2026

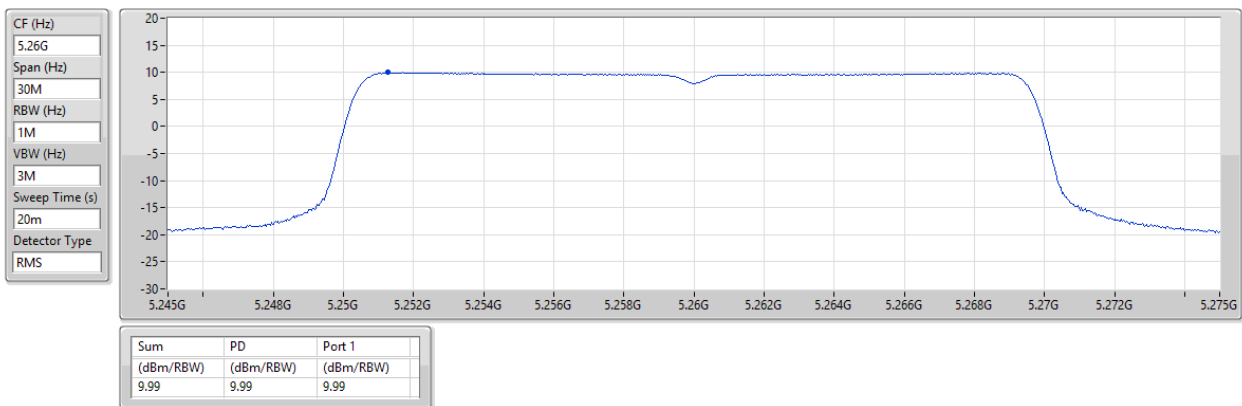


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5300MHz

19/02/2026

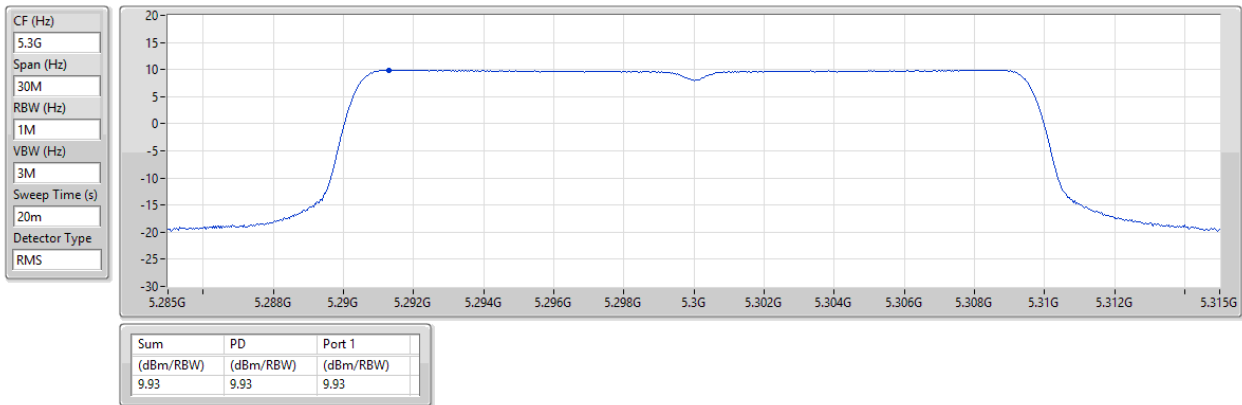


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5320MHz

11/06/2026

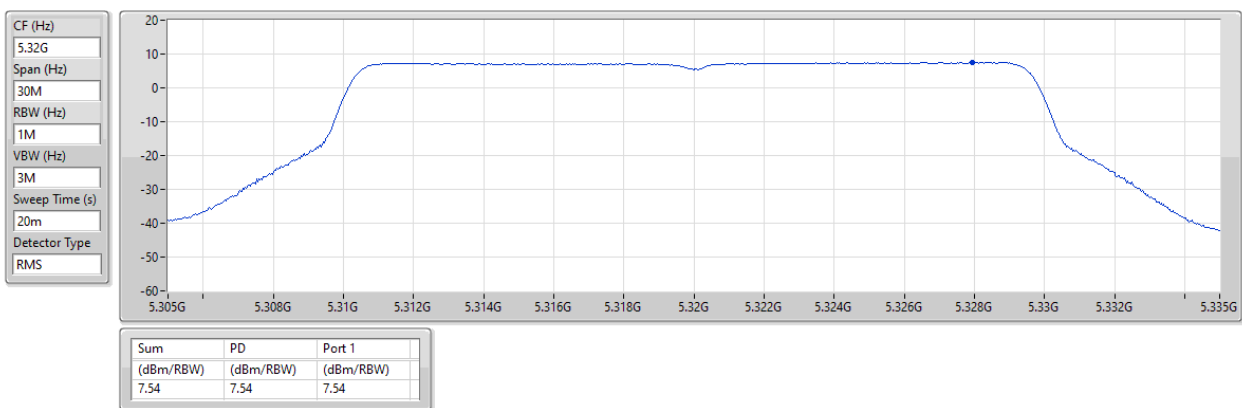


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5270MHz

11/06/2026

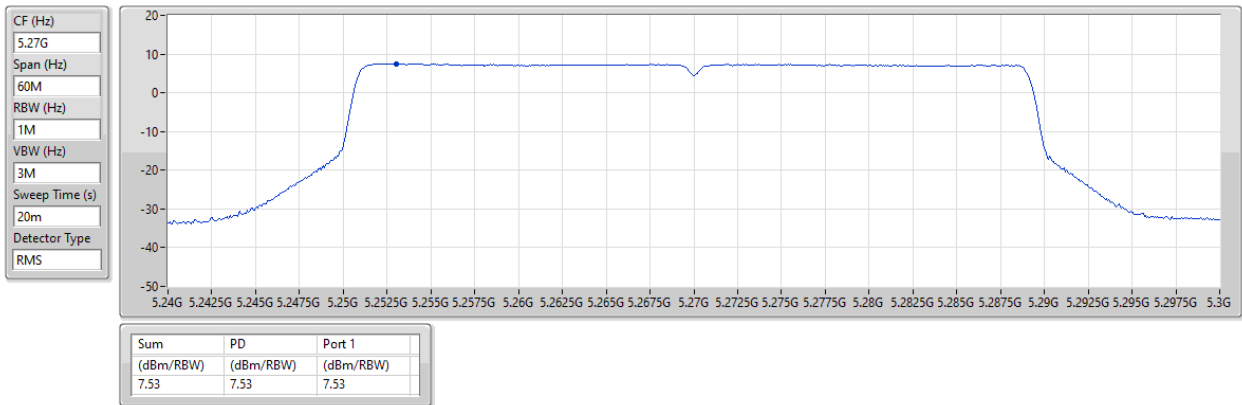


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5310MHz

11/06/2026

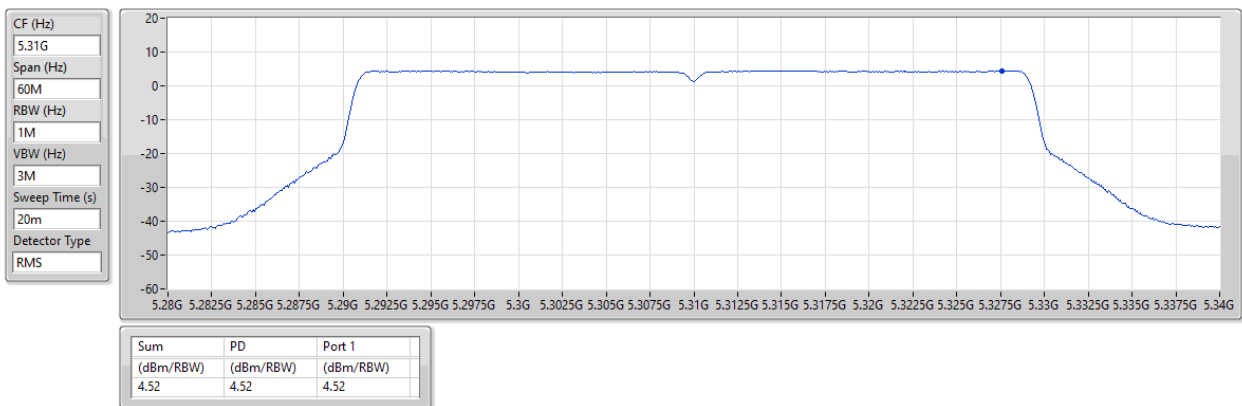


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5290MHz

11/06/2026

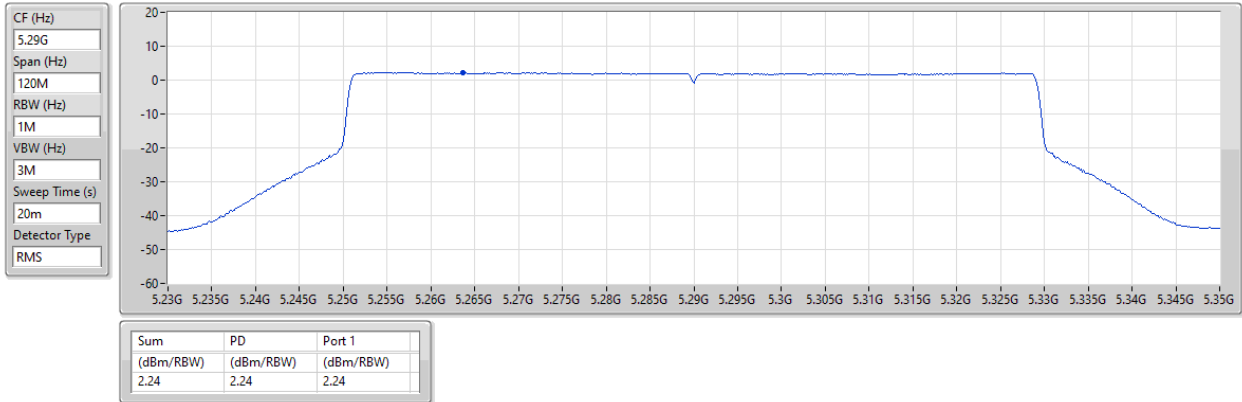


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

11/06/2026

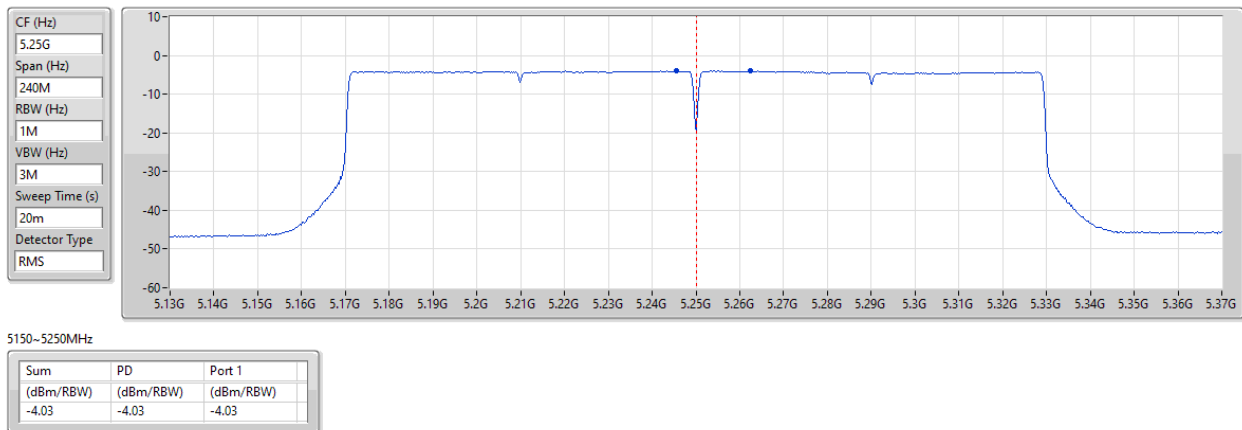

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.99	-3.99	-3.99

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5260MHz

18/02/2026

CF (Hz)
5.26G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

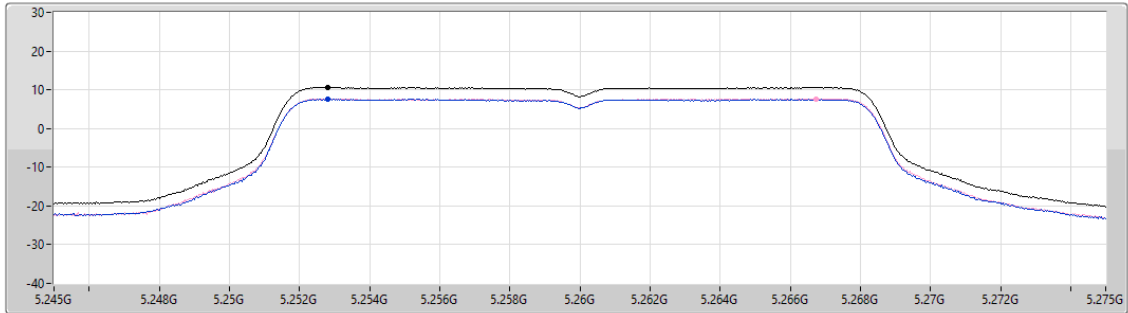

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.61	10.61	7.53	7.70

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

18/02/2026

CF (Hz)
5.3G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

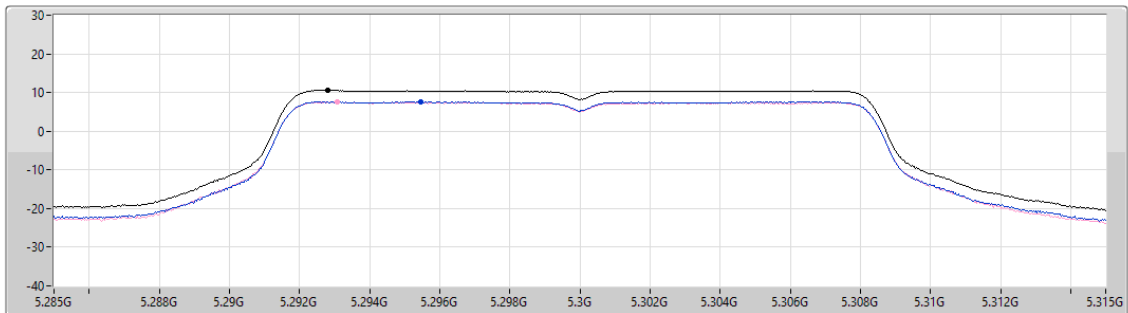

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
10.54	10.54	7.61	7.54

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5320MHz

18/02/2026

CF (Hz)
5.32G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

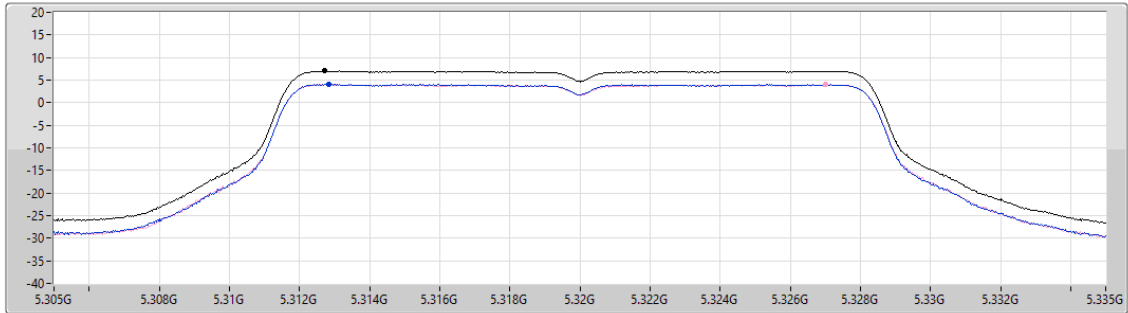

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
7.04	7.04	4.08	4.04

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

18/02/2026

CF (Hz)
5.26G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

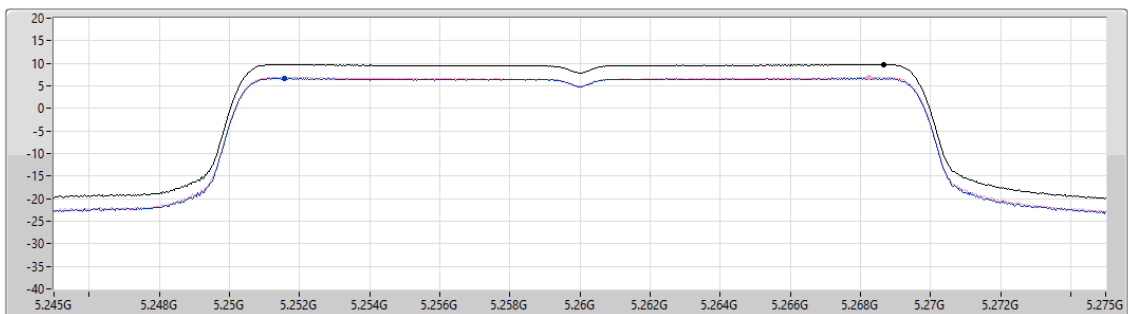

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.78	9.78	6.70	6.92

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5300MHz

18/02/2026

CF (Hz)
5.3G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

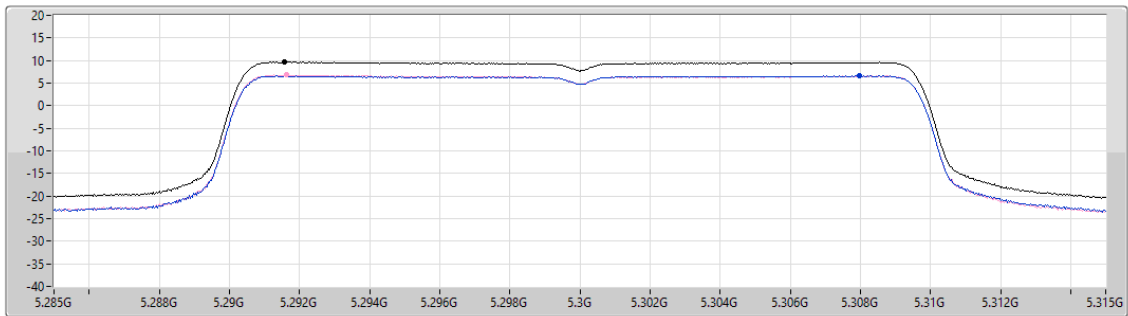

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.69	9.69	6.62	6.80

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5320MHz

11/06/2026

CF (Hz)
5.32G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

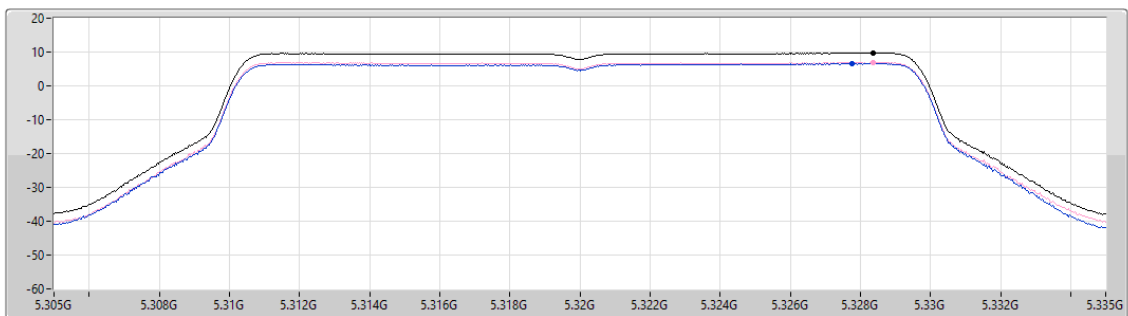

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.73	9.73	6.57	6.90

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

18/02/2026

CF (Hz)
5.27G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

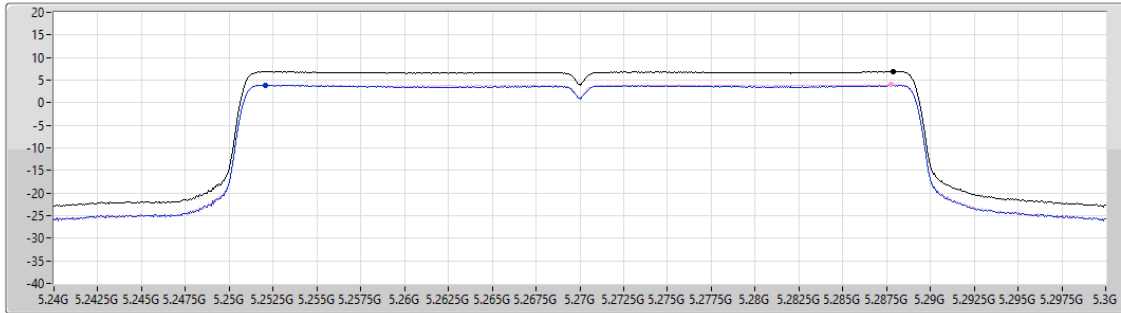

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.91	6.91	3.91	4.00

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5310MHz

11/06/2026

CF (Hz)
5.31G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

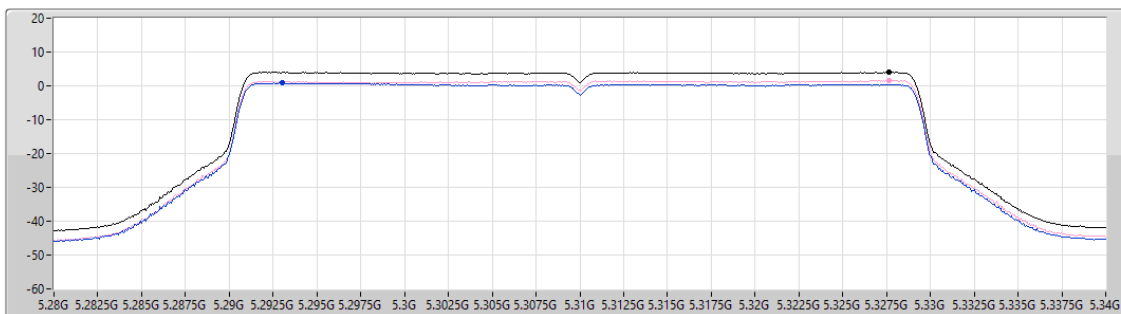

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.04	4.04	0.81	1.59

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

11/06/2026

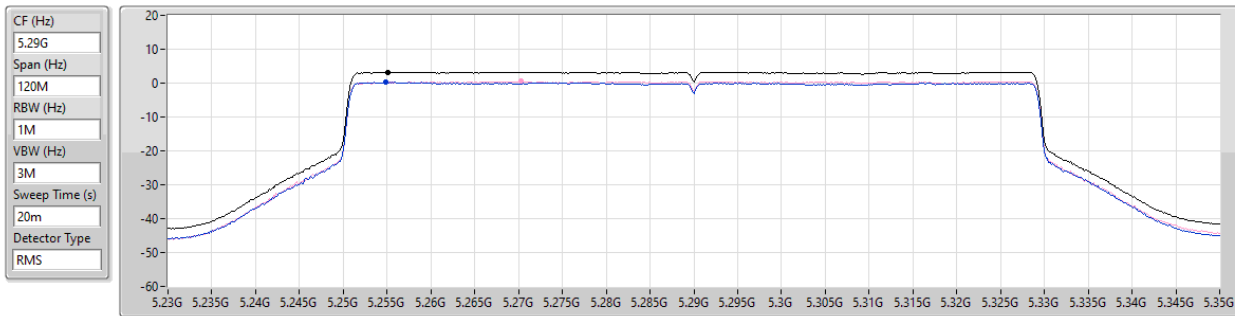


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.23	3.23	0.22	0.47

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

11/06/2026

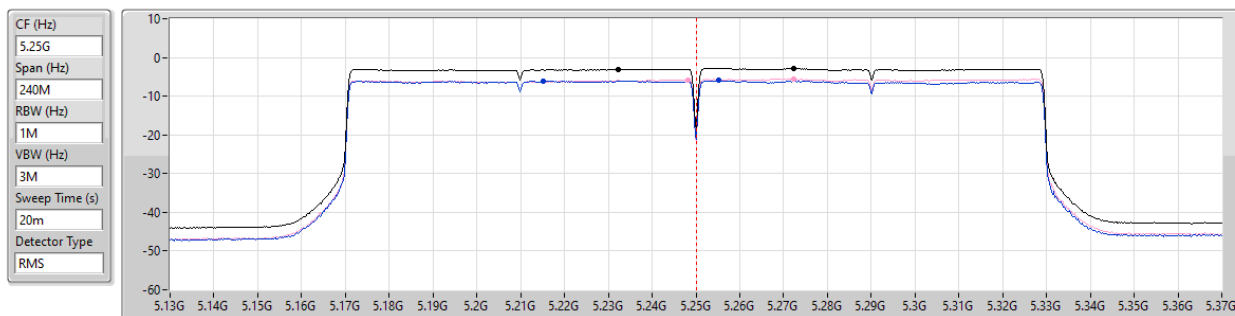

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.99	-2.99	-6.05	-5.74

5250~5350MHz


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.81	-2.81	-5.99	-5.54

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5260MHz

18/02/2026

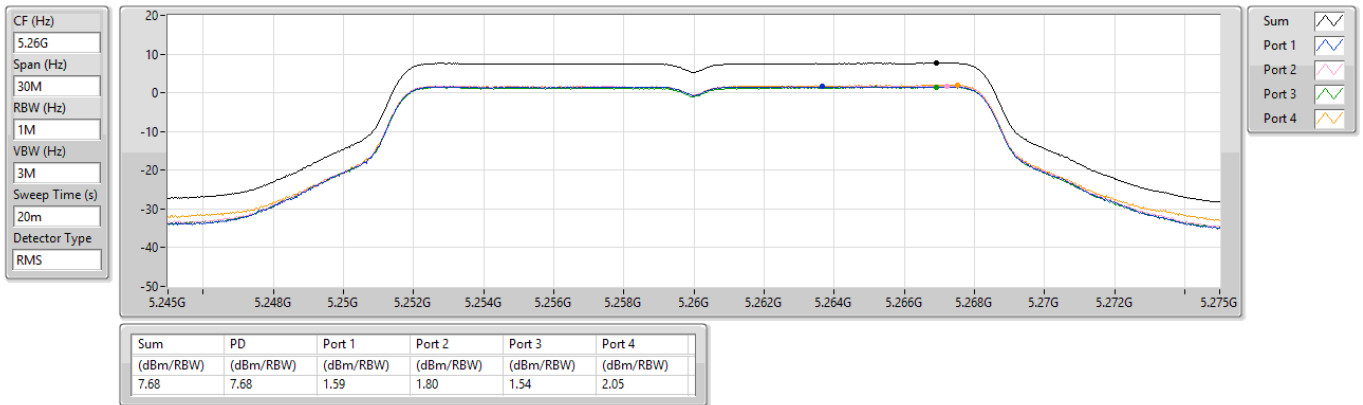


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5300MHz

18/02/2026

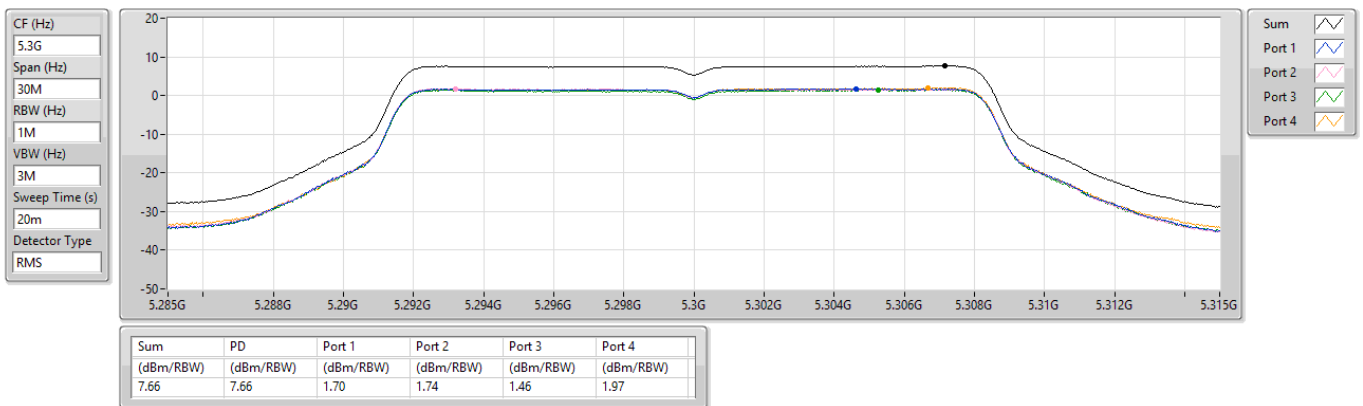


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5320MHz

18/02/2026

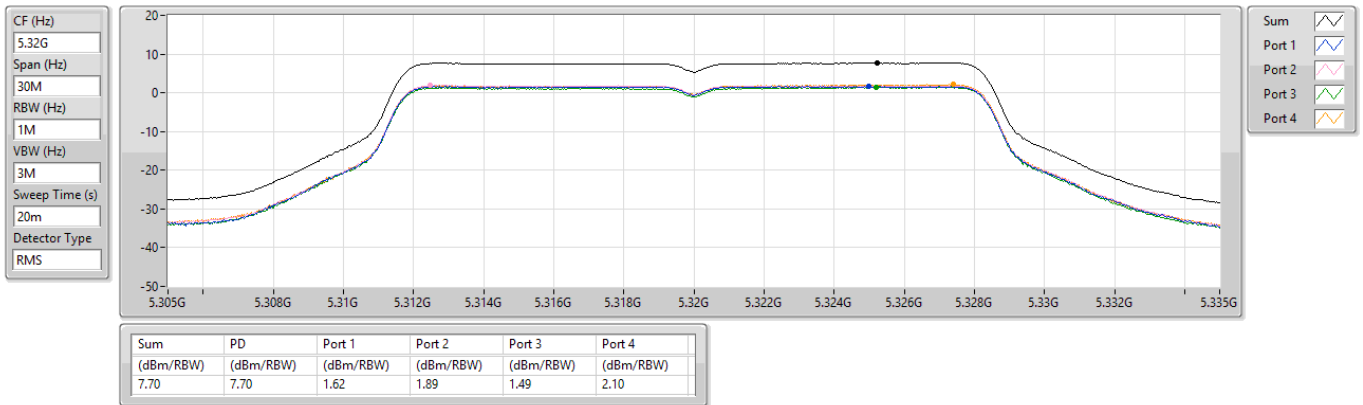


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5260MHz

18/02/2026

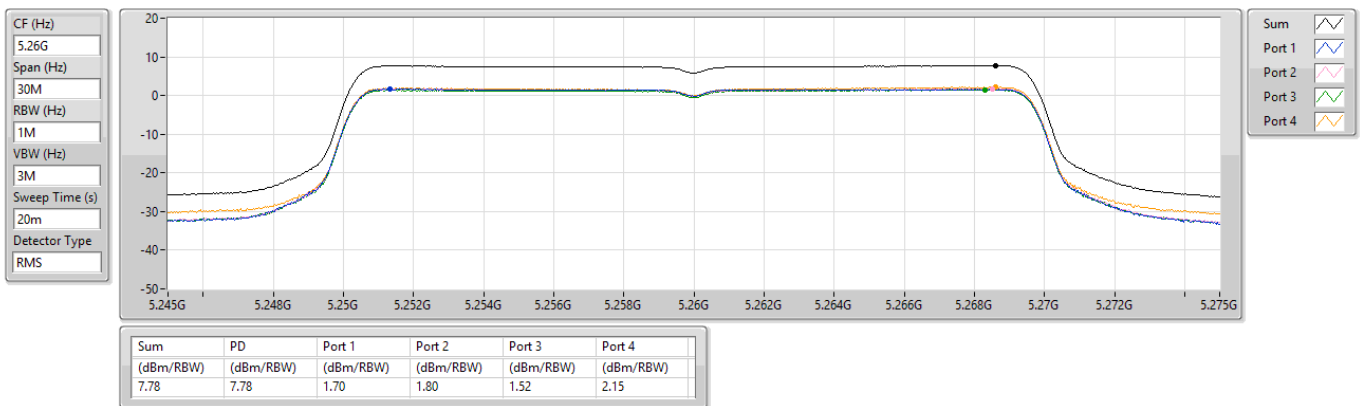


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5300MHz

18/02/2026

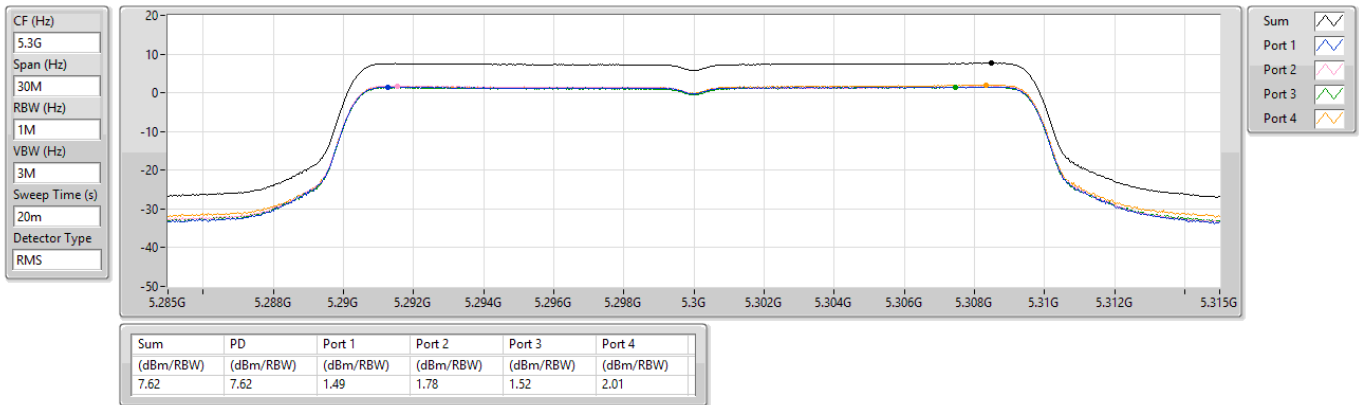


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5320MHz

18/02/2026

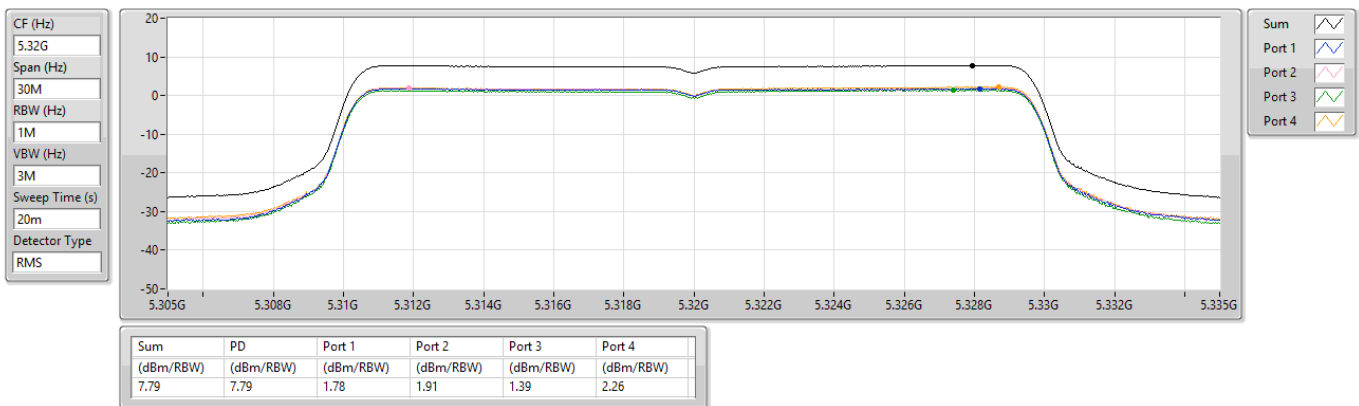


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5270MHz

18/02/2026

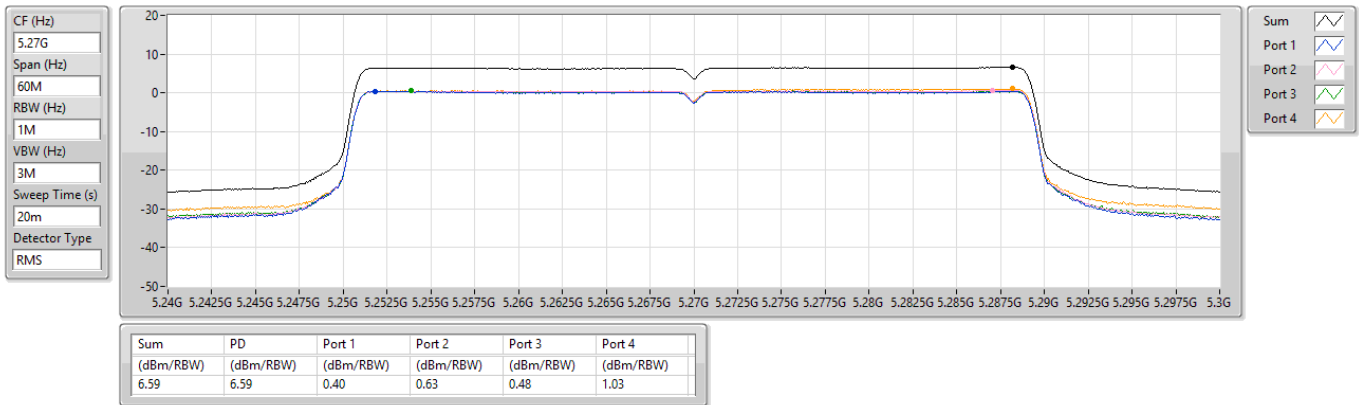


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5310MHz

11/06/2026

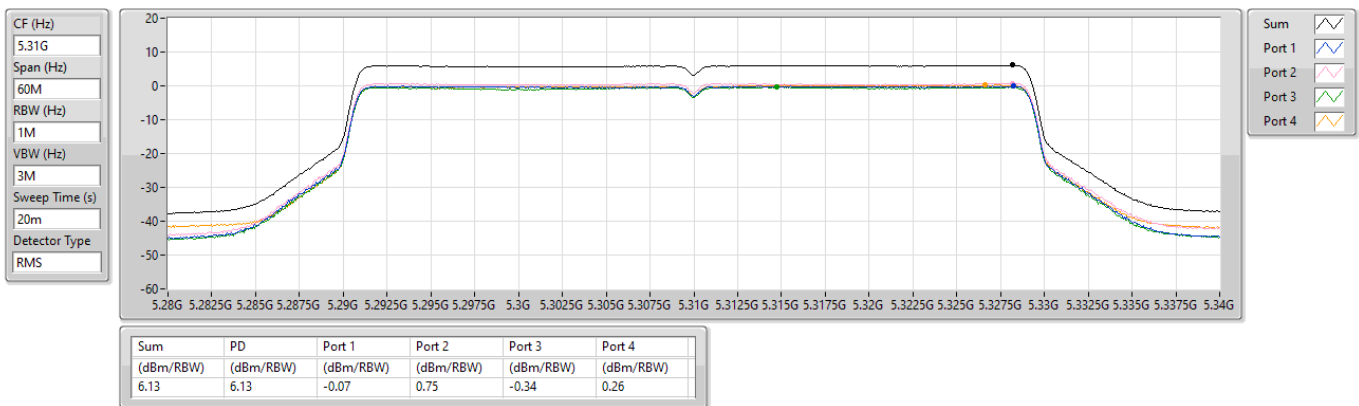


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5290MHz

11/06/2026

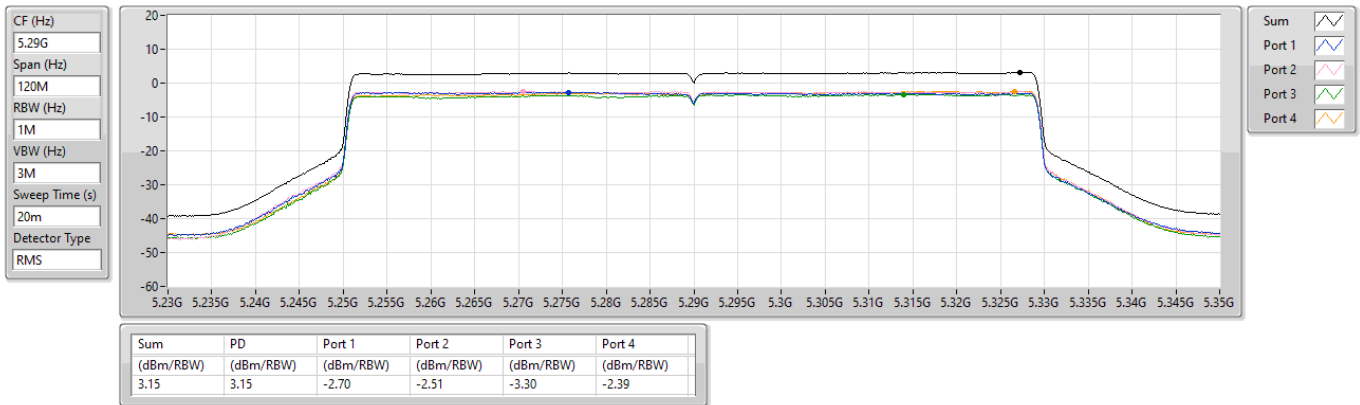


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

11/06/2026

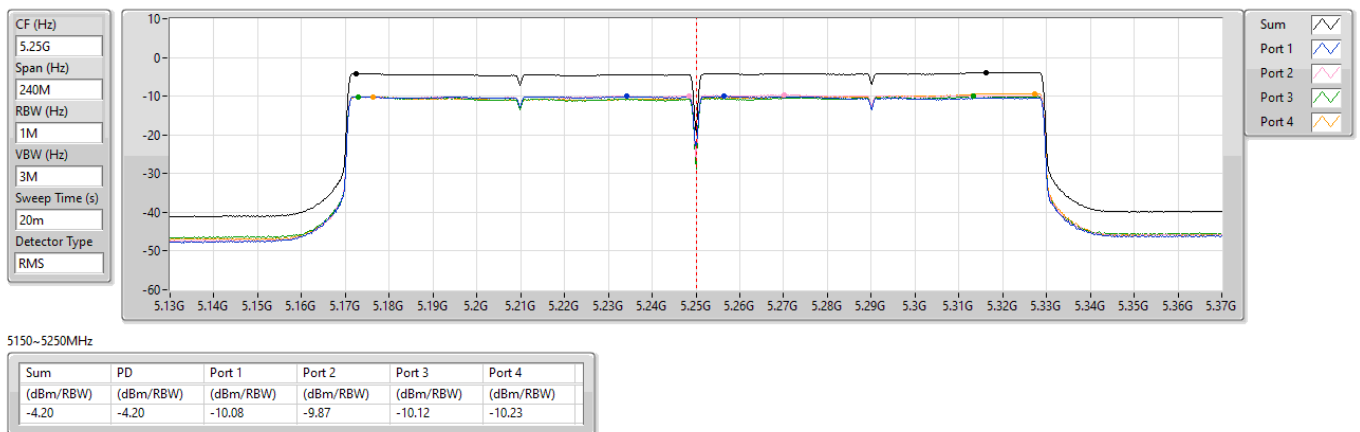

5250~5350MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.92	-3.92	-9.99	-9.66	-9.98	-9.29



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	-4.39	1.66
5.25-5.35GHz	-	-
802.11be EHT160_Nss1,(MCS0)_1TX	-4.41	1.66

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.39	-4.39	16.95	1.66	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-4.41	-4.41	10.93	1.66	Inf


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

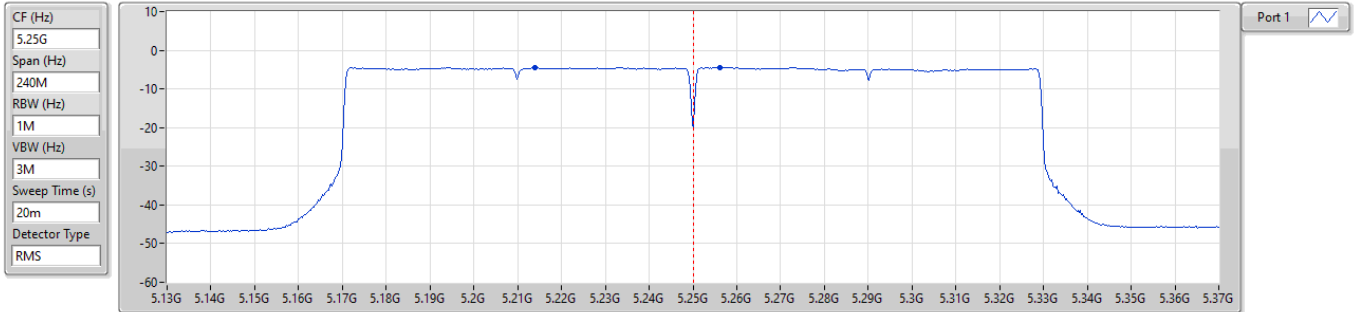

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.39	-4.39	-4.39

5250~5350MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.41	-4.41	-4.41



Summary


Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	-3.52	2.53
5.25-5.35GHz	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	-3.32	2.75

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.57	-6.38	-3.52	16.95	2.53	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-6.41	-6.14	-3.32	10.93	2.75	Inf

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

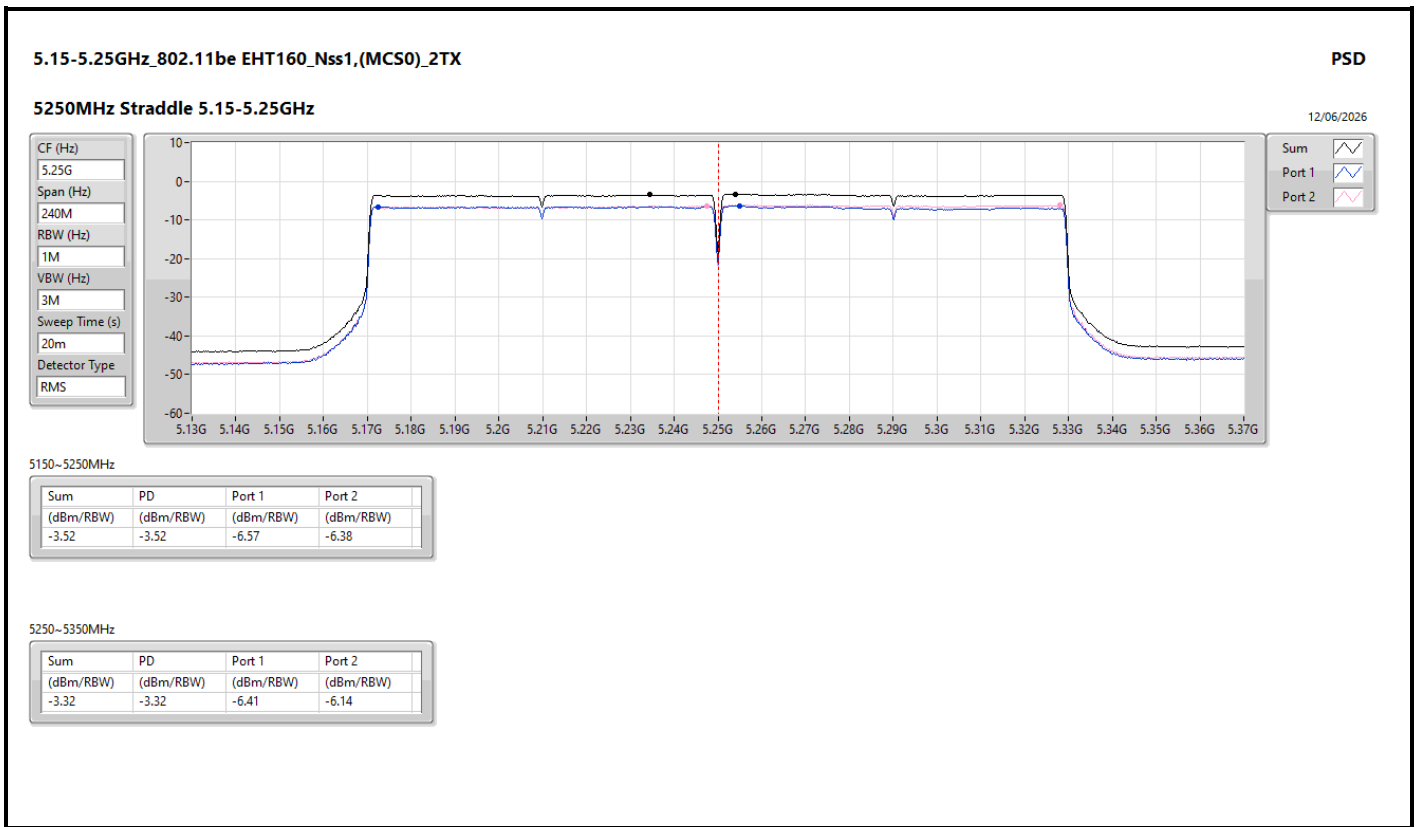



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	-4.78	4.04
5.25-5.35GHz	-	-
802.11be EHT160_Nss1,(MCS0)_4TX	-4.48	4.57

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-10.66	-10.48	-10.70	-10.78	-4.78	14.18	4.04	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-10.60	-10.26	-10.47	-9.96	-4.48	7.95	4.57	Inf


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

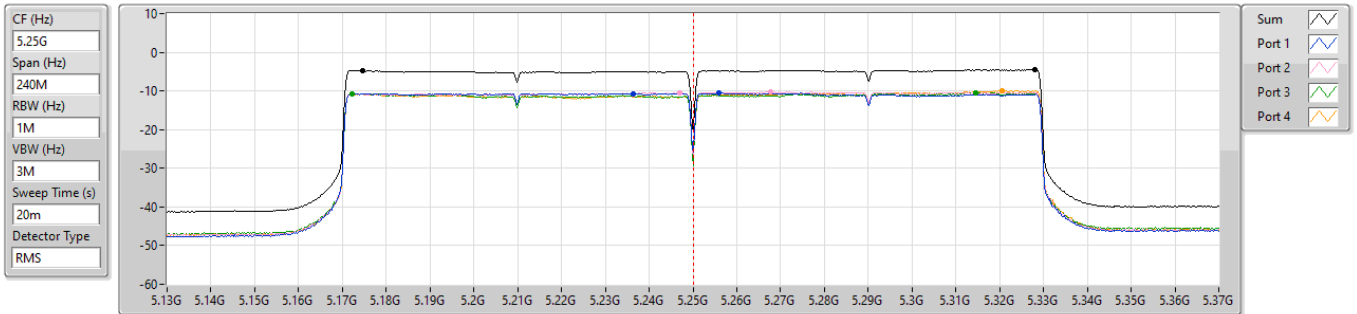

5150~5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.78	-4.78	-10.66	-10.48	-10.70	-10.78

5250~5350MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.48	-4.48	-10.60	-10.26	-10.47	-9.96

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-4.62
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-3.55
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-4.94
5.25-5.35GHz	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	1.68
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	2.44
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	0.90
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	-4.03
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-2.94
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-4.00

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	-1.05	-	-	-	-1.05	10.93
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	1.68	-	-	-	1.68	10.93
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.90	-	-	-	-4.90	16.95
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.62	-	-	-	-4.62	16.95
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.85	-	-	-	-4.85	16.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-4.03	-	-	-	-4.03	10.93
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-4.11	-	-	-	-4.11	10.93
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-4.28	-	-	-	-4.28	10.93
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	-4.89	-5.04	-	-	-2.09	10.93
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	-0.31	-0.43	-	-	2.44	10.93
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.66	-6.60	-	-	-3.78	16.95
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.41	-6.33	-	-	-3.55	16.95
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.61	-6.57	-	-	-3.77	16.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-6.05	-5.89	-	-	-3.12	10.93
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-5.80	-5.84	-	-	-2.94	10.93
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-5.87	-5.80	-	-	-3.04	10.93
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	9.05	-6.44	-6.51	-6.19	-6.06	-0.46	7.95
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	9.05	-4.99	-5.23	-4.85	-4.67	0.90	7.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-11.17	-10.86	-9.90	-11.08	-4.94	14.18
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-11.17	-11.08	-10.45	-11.15	-5.06	14.18
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-11.32	-11.35	-10.81	-11.76	-5.49	14.18
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-10.47	-10.31	-9.00	-9.50	-4.00	7.95
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-10.83	-10.51	-9.59	-9.64	-4.26	7.95
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-10.60	-10.51	-9.58	-10.13	-4.40	7.95


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

PSD

5290MHz

12/06/2026

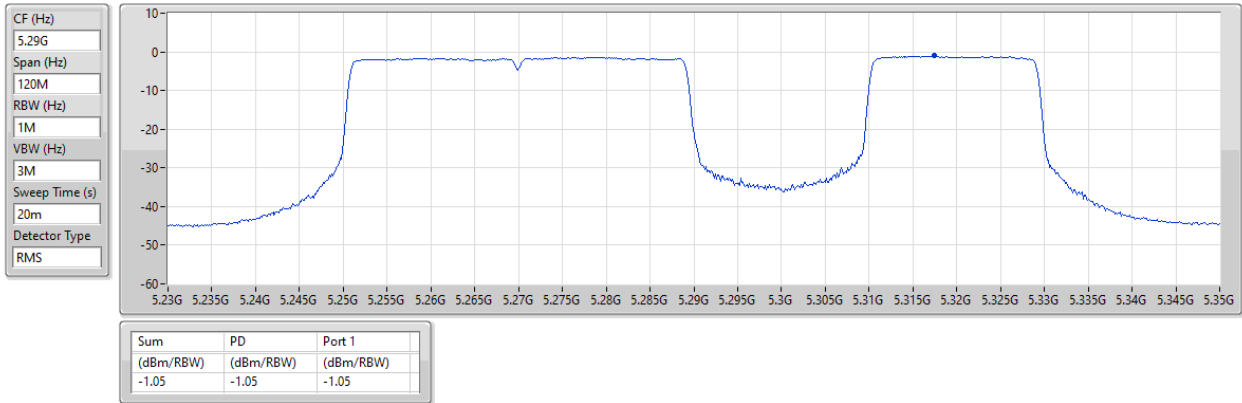


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

PSD

5290MHz

12/06/2026

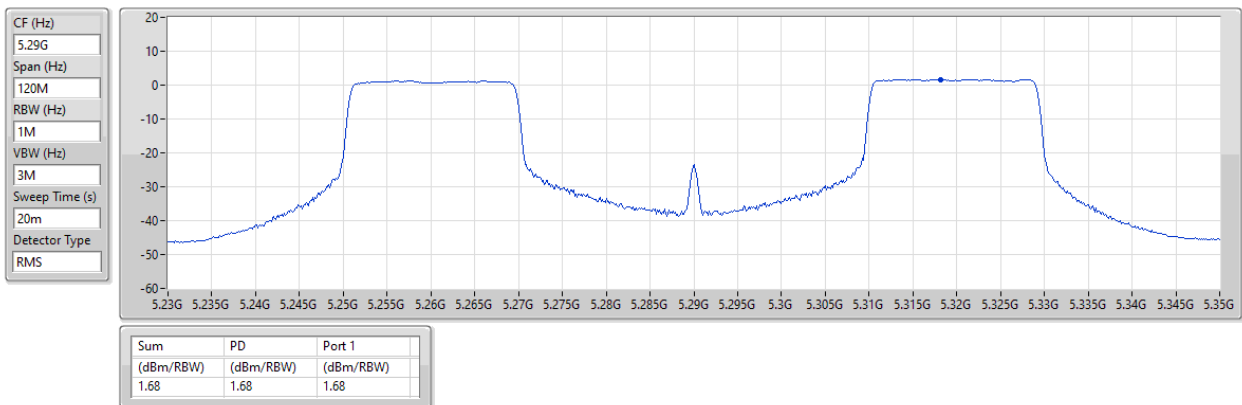


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

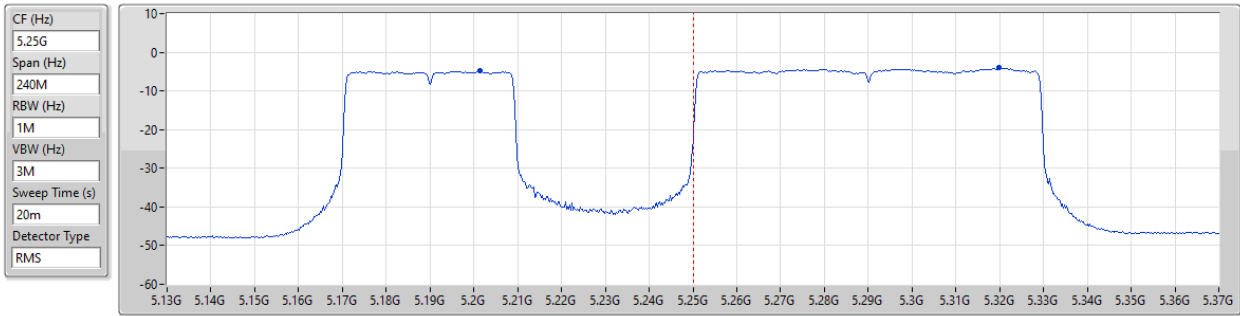

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.90	-4.90	-4.90

5250~5350MHz


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.03	-4.03	-4.03

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

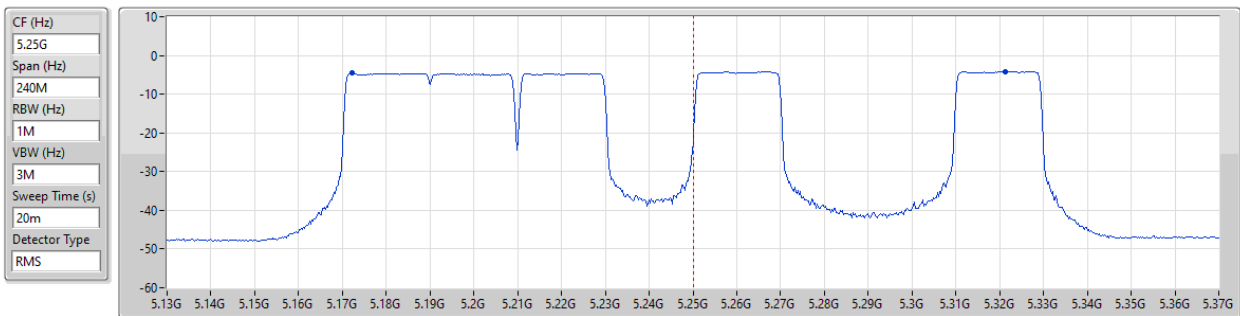

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.62	-4.62	-4.62

5250~5350MHz


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.11	-4.11	-4.11

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

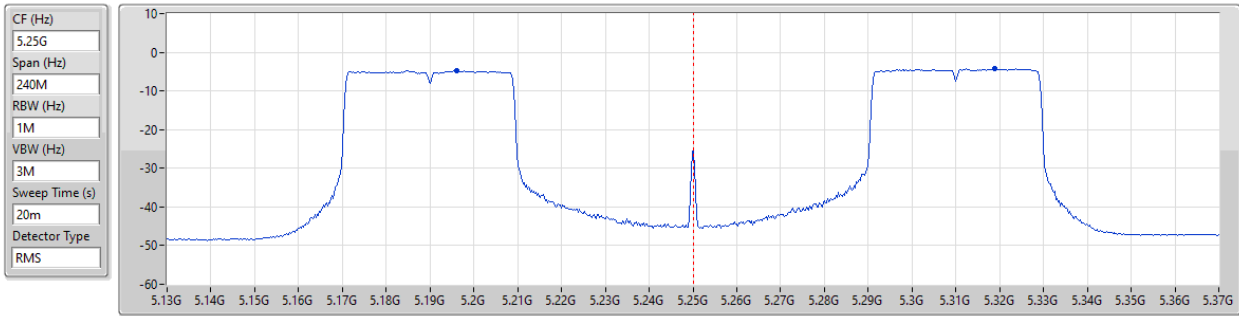

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.85	-4.85	-4.85

5250~5350MHz


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.28	-4.28	-4.28

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5290MHz

12/06/2026

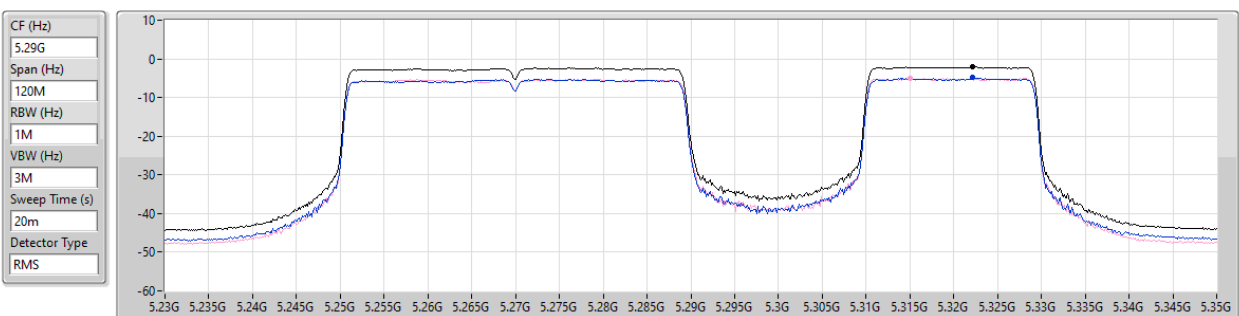


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.09	-2.09	-4.89	-5.04

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5290MHz

12/06/2026

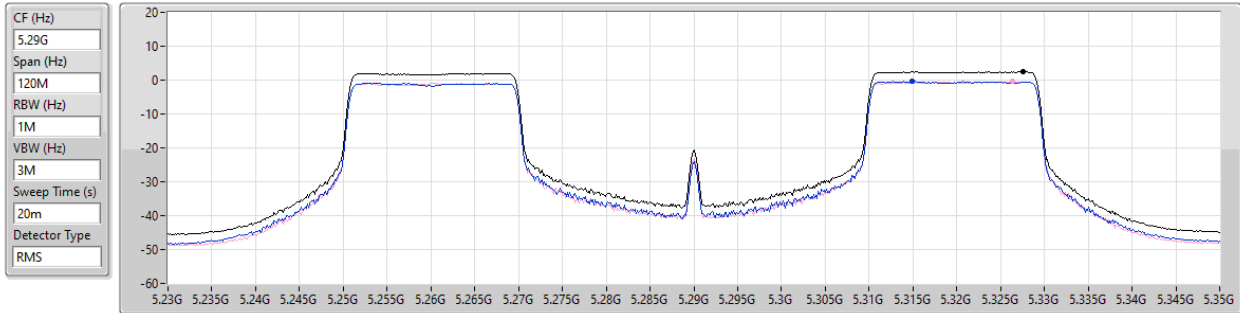


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.44	2.44	-0.31	-0.43

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

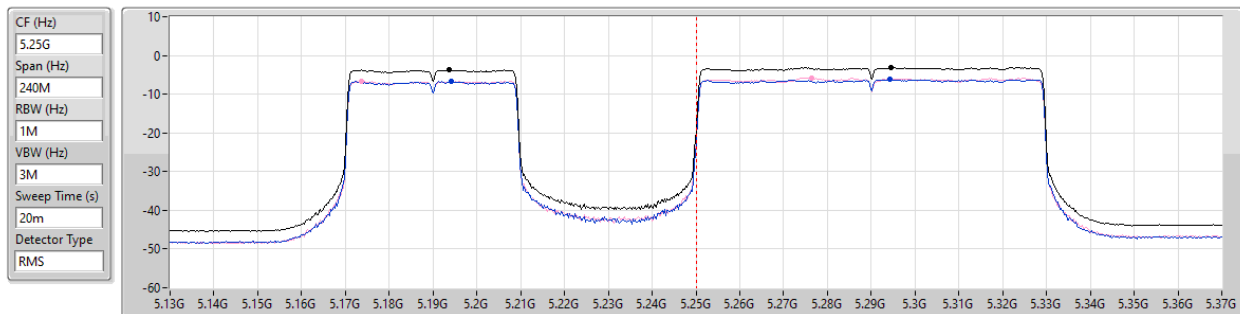

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.78	-3.78	-6.66	-6.60

5150-5350MHz


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.12	-3.12	-6.05	-5.89

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

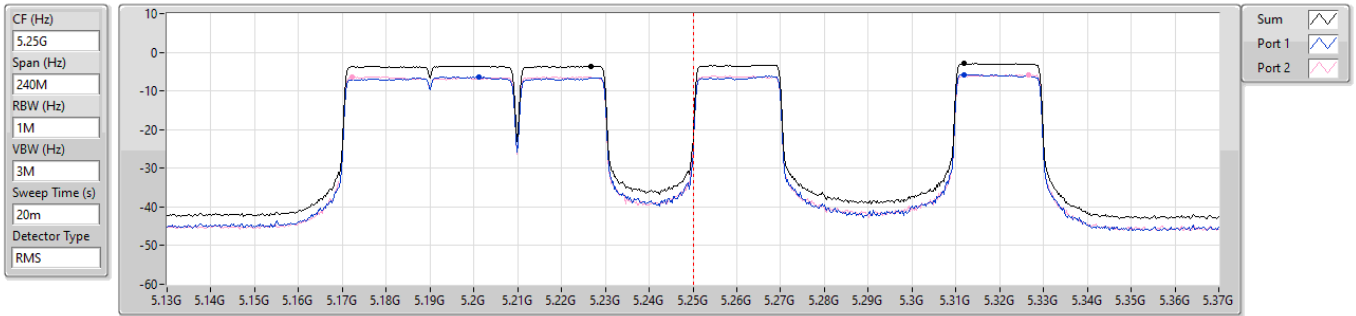

5150~5250MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.55	-3.55	-6.41	-6.33

5250~5350MHz


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.94	-2.94	-5.80	-5.84

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

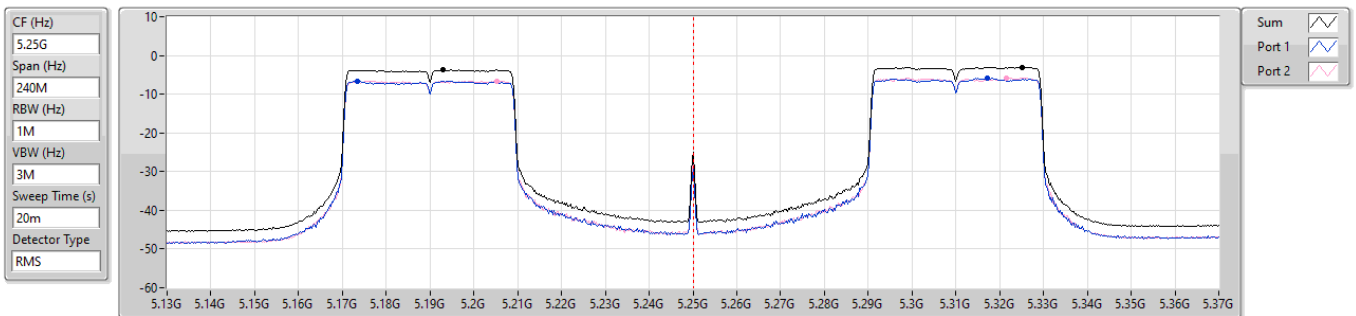

5150~5250MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.77	-3.77	-6.61	-6.57

5250~5350MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.04	-3.04	-5.87	-5.80

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

PSD

5290MHz

12/06/2026

CF (Hz)
5.29G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

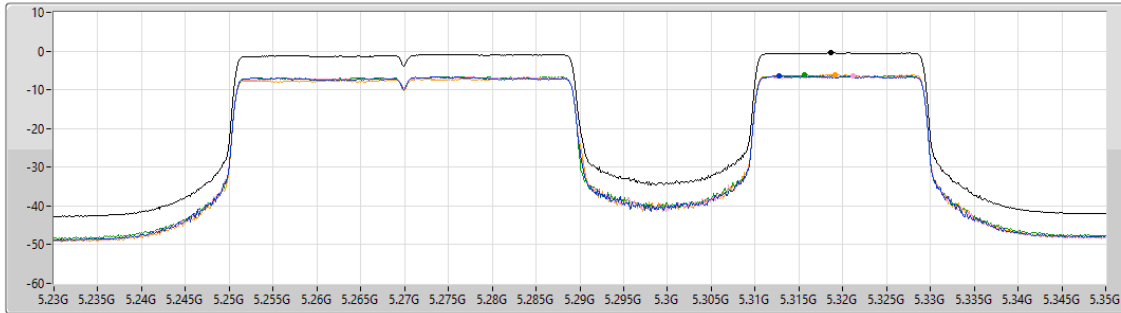

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.46	-0.46	-6.44	-6.51	-6.19	-6.06

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

PSD

5290MHz

12/06/2026

CF (Hz)
5.29G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

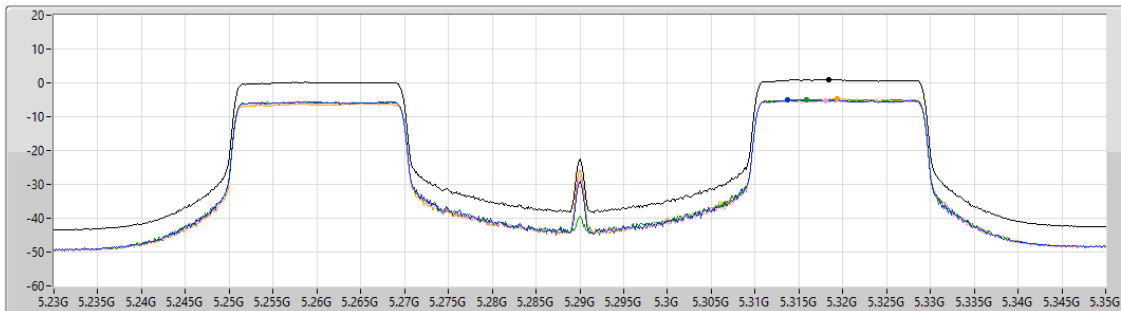

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.90	0.90	-4.99	-5.23	-4.85	-4.67

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

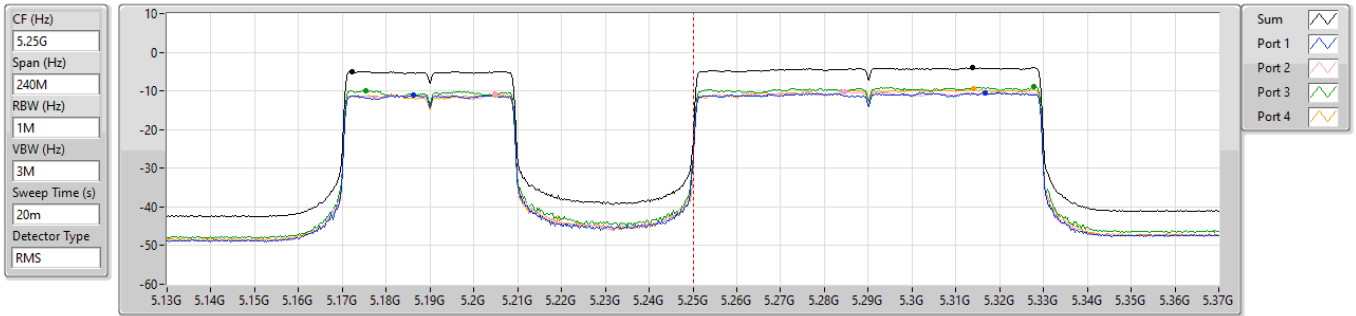

5150~5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.94	-4.94	-11.17	-10.86	-9.90	-11.08

5250~5350MHz


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.00	-4.00	-10.47	-10.31	-9.00	-9.50

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

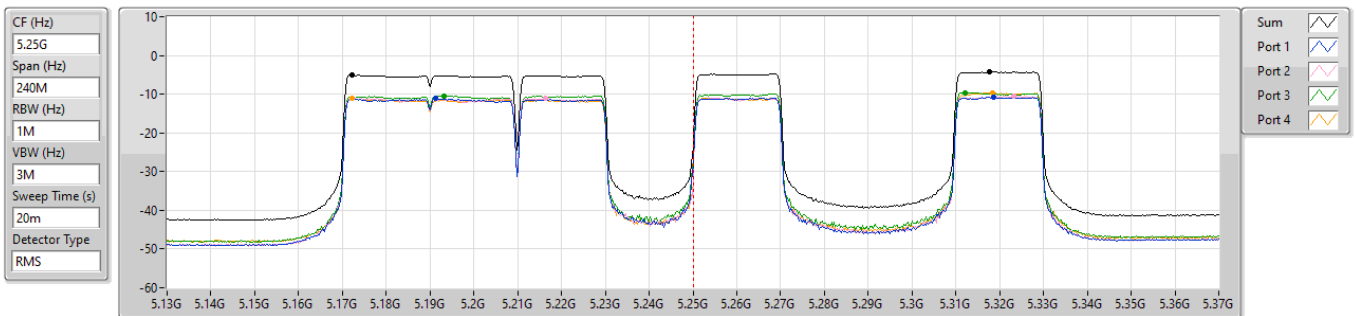

5150~5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.06	-5.06	-11.17	-11.08	-10.45	-11.15

5250~5350MHz


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.26	-4.26	-10.83	-10.51	-9.59	-9.64

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

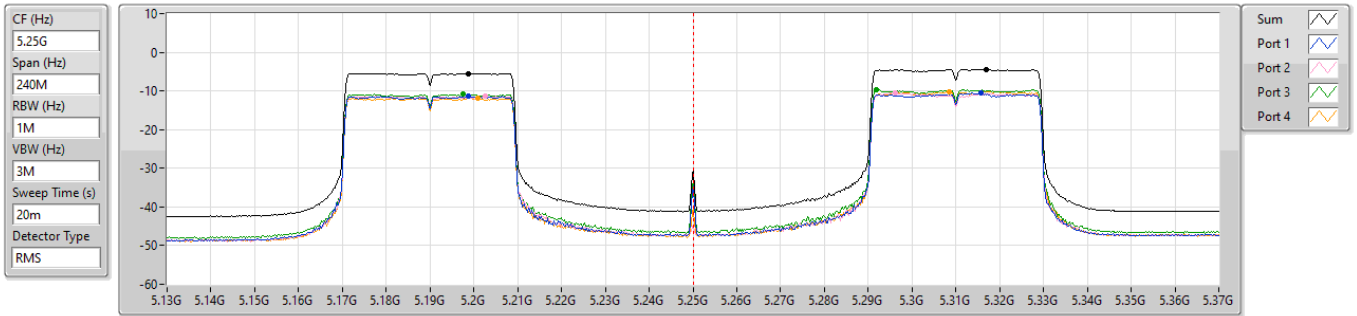

5150~5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.49	-5.49	-11.32	-11.35	-10.81	-11.76

5250~5350MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.40	-4.40	-10.60	-10.51	-9.58	-10.13

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX	-4.16
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-3.38
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-3.56
5.25-5.35GHz	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX	1.31
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	3.15
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	1.02
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX	-3.69
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-2.90
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-2.66

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	1.31				1.31	10.93
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.83				-4.83	16.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-4.16				-4.16	16.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-4.28				-4.28	10.93
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-3.69				-3.69	10.93
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5290MHz	Pass	6.07	0.13	0.25			3.15	10.93
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.35	-6.32			-3.38	16.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	6.05	-6.60	-6.46			-3.65	16.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-5.80	-5.81			-2.90	10.93
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	6.07	-6.11	-5.97			-3.12	10.93
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-
5290MHz	Pass	9.05	-5.19	-4.97	-4.76	-4.65	1.02	7.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-10.37	-9.98	-9.97	-10.21	-4.20	14.18
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.82	-9.69	-9.32	-9.33	-9.61	-3.56	14.18
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-9.74	-9.46	-9.13	-8.74	-3.32	7.95
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	9.05	-9.09	-8.83	-8.49	-8.05	-2.66	7.95


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX

PSD

5290MHz

12/06/2026

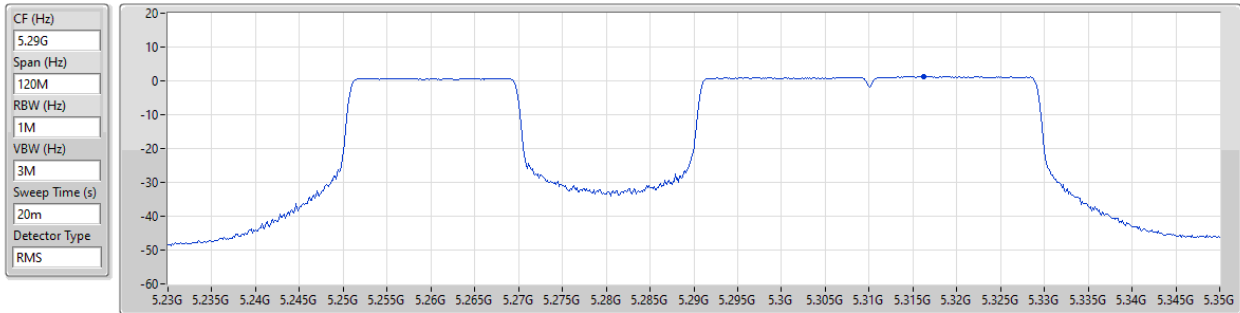


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.31	1.31	1.31

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

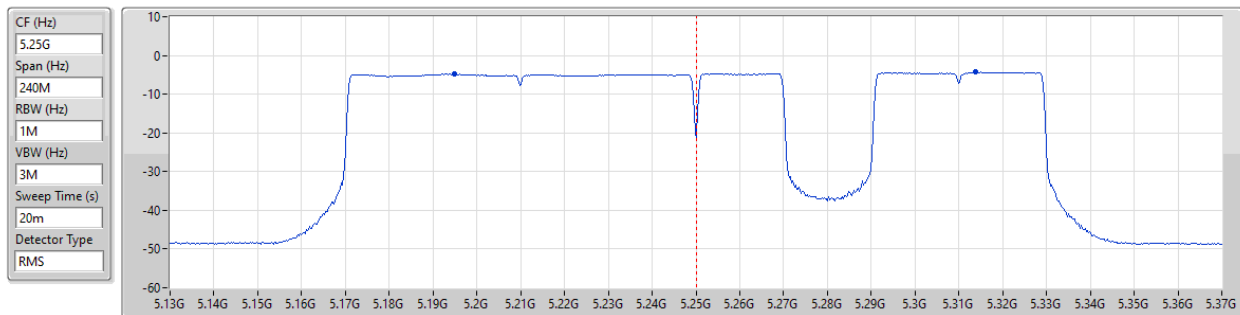

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.83	-4.83	-4.83

5250~5350MHz


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.28	-4.28	-4.28

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_1TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

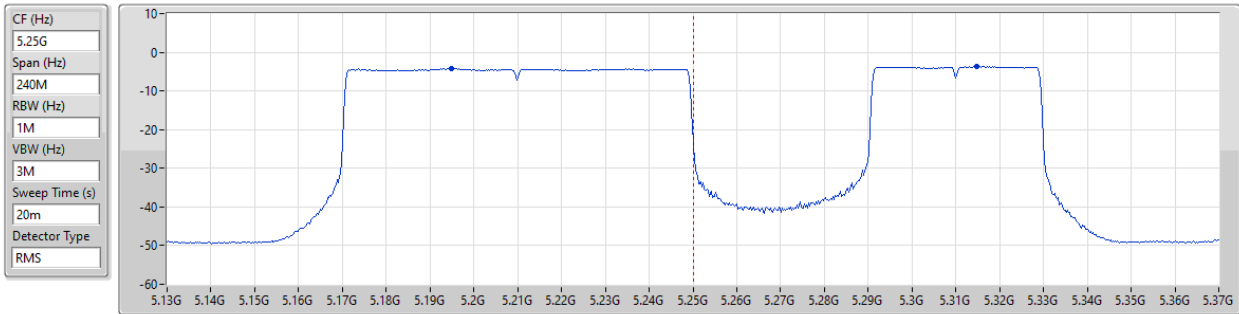

5150~5250MHz

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.16	-4.16	-4.16

5250~5350MHz


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.69	-3.69	-3.69

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

PSD

5290MHz

12/06/2026

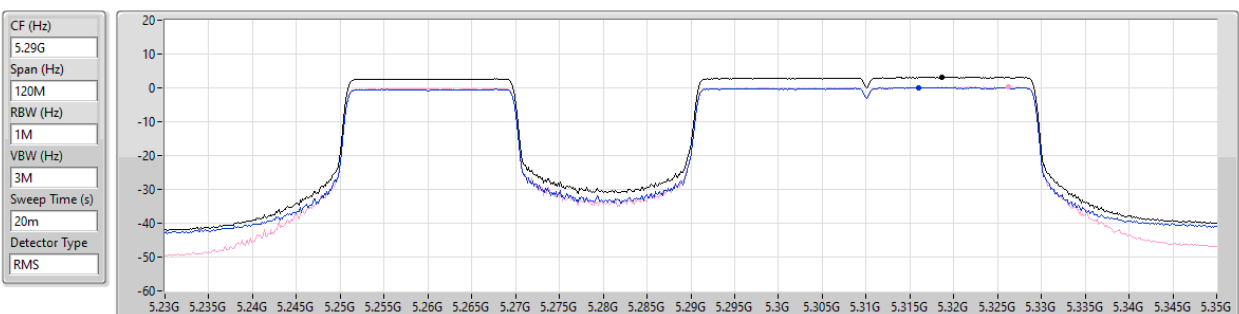


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.15	3.15	0.13	0.25

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP_6_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

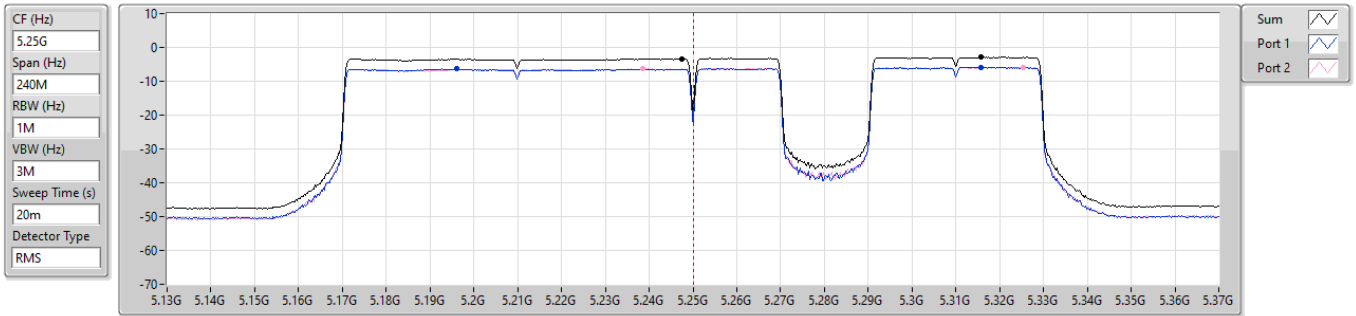

5150~5250MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.38	-3.38	-6.35	-6.32

5250~5350MHz


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.90	-2.90	-5.80	-5.81

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP_3_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

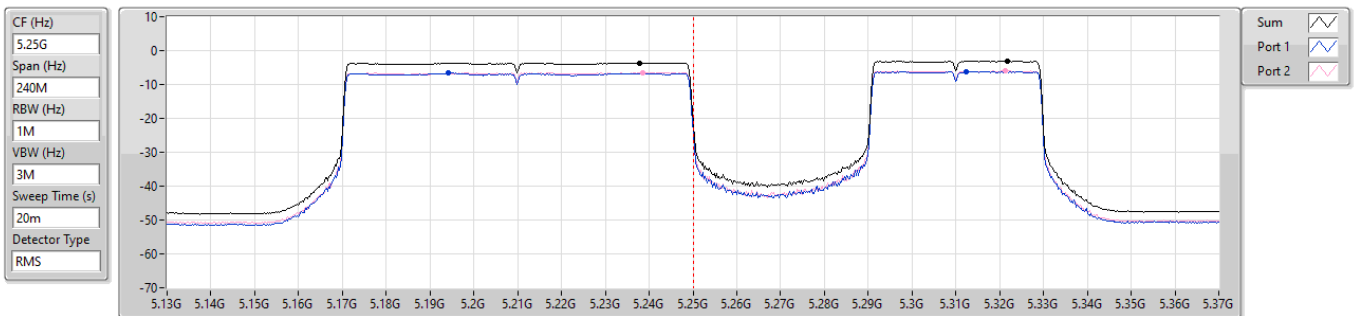

5150~5250MHz

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.65	-3.65	-6.60	-6.46

5250~5350MHz


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.12	-3.12	-6.11	-5.97

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX

PSD

5290MHz

12/06/2026

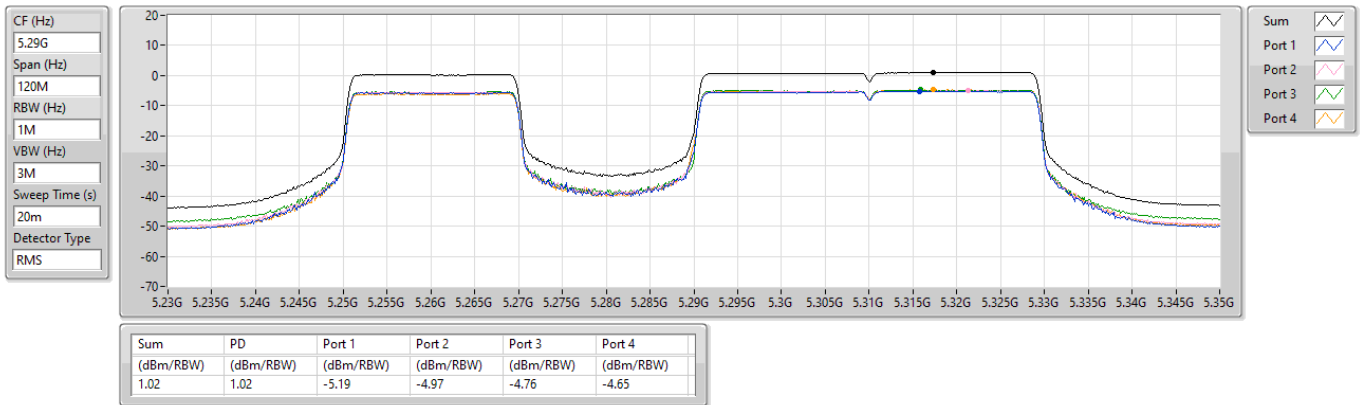


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

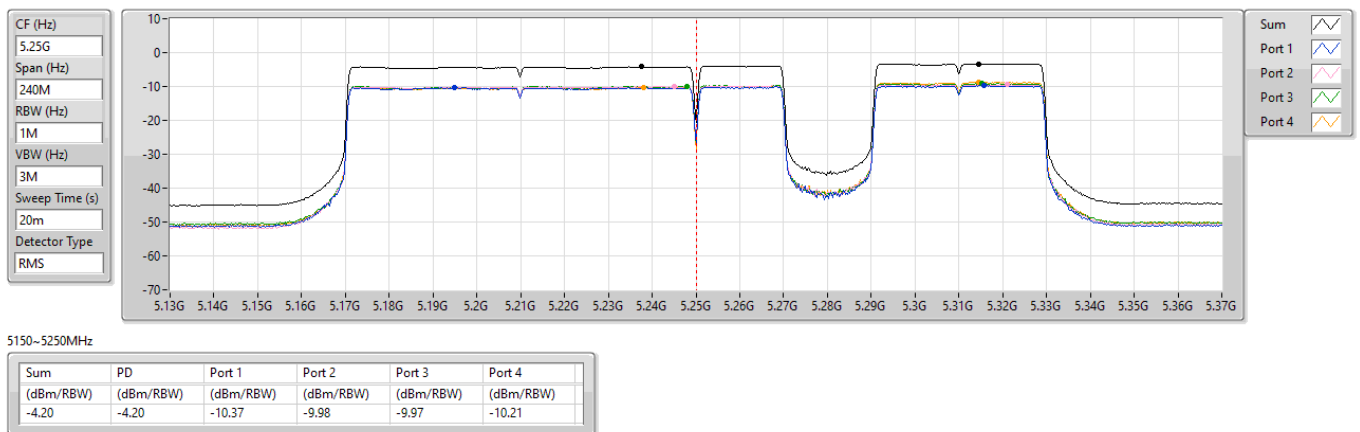

5250~5350MHz


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.32	-3.32	-9.74	-9.46	-9.13	-8.74

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX

PSD

5250MHz Straddle 5.15-5.25GHz

12/06/2026

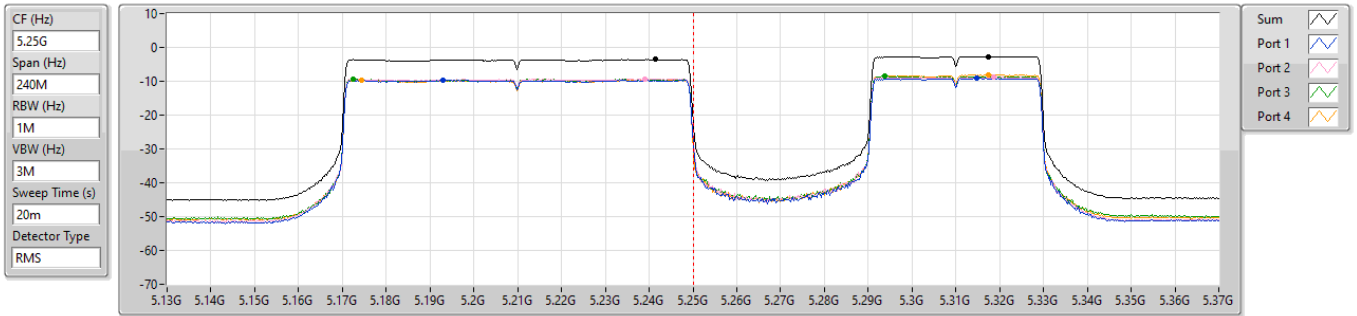

5150-5250MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.56	-3.56	-9.69	-9.32	-9.33	-9.61

5250-5350MHz

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.66	-2.66	-9.09	-8.83	-8.49	-8.05




Radiated Emissions below 1GHz

Appendix E.1

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 10	Pass	PK	47.46M	35.82	40.00	-4.18	Vertical

Mode 10

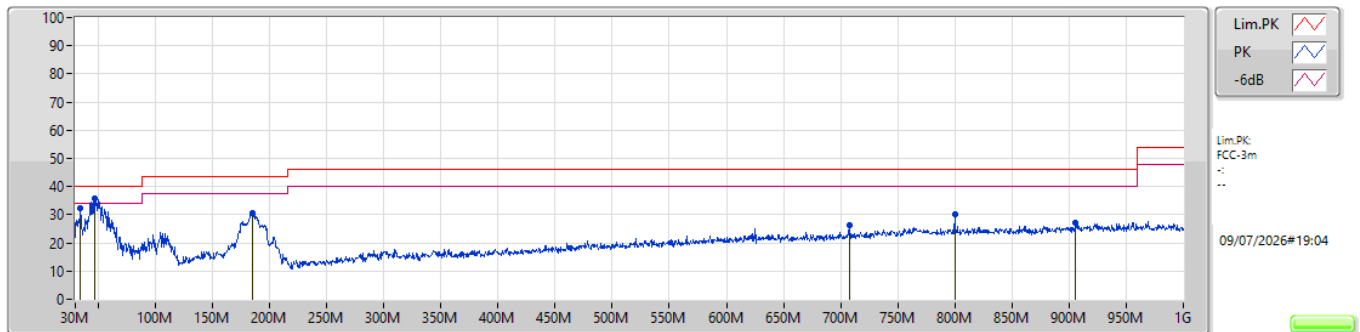

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	34.37M	32.12	40.00	-7.88	-36.57	3	Vertical	167	1.00	-	68.69	18.15	0.15	54.87		
PK	47.46M	35.82	40.00	-4.18	-34.17	3	Vertical	223	1.00	"Worst"	69.99	19.51	0.28	53.96		
PK	184.72M	30.52	43.50	-12.98	-35.12	3	Vertical	29	1.00	-	65.64	16.91	1.57	53.60		
PK	707.55M	26.47	46.00	-19.53	-21.95	3	Vertical	319	2.00	-	48.42	26.92	3.68	52.55		
PK	800.18M	30.07	46.00	-15.93	-19.74	3	Vertical	166	3.00	-	49.81	28.09	4.04	51.87		
PK	905.91M	26.96	46.00	-19.04	-18.04	3	Vertical	87	2.00	-	45.00	29.13	4.58	51.75		

Mode 10

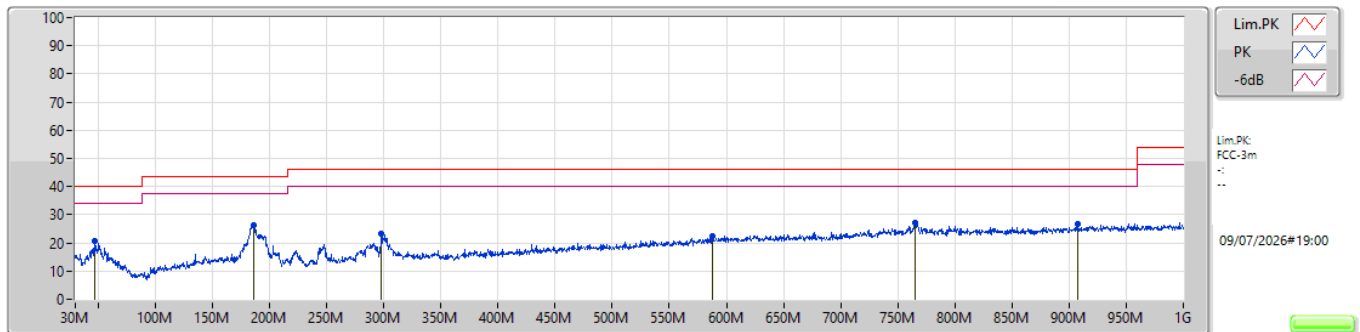

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)		
PK	47.46M	20.88	40.00	-19.12	-34.17	3	Horizontal	174	1.00	-	55.05	19.51	0.28	53.96		
PK	186.17M	26.34	43.50	-17.16	-35.32	3	Horizontal	211	2.00	"Worst"	61.66	16.73	1.58	53.63		
PK	298.21M	23.09	46.00	-22.91	-32.33	3	Horizontal	13	1.00	-	55.42	19.19	2.15	53.67		
PK	587.75M	22.58	46.00	-23.42	-24.34	3	Horizontal	189	3.00	-	46.92	25.32	3.33	52.99		
PK	764.78M	27.36	46.00	-18.64	-20.29	3	Horizontal	334	3.00	-	47.65	27.98	3.88	52.15		
PK	907.37M	26.65	46.00	-19.35	-17.97	3	Horizontal	151	1.00	-	44.62	29.19	4.58	51.74		




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	AV	5.1492G	53.94	54.00	-0.06	3	Horizontal	360	1.93	13

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

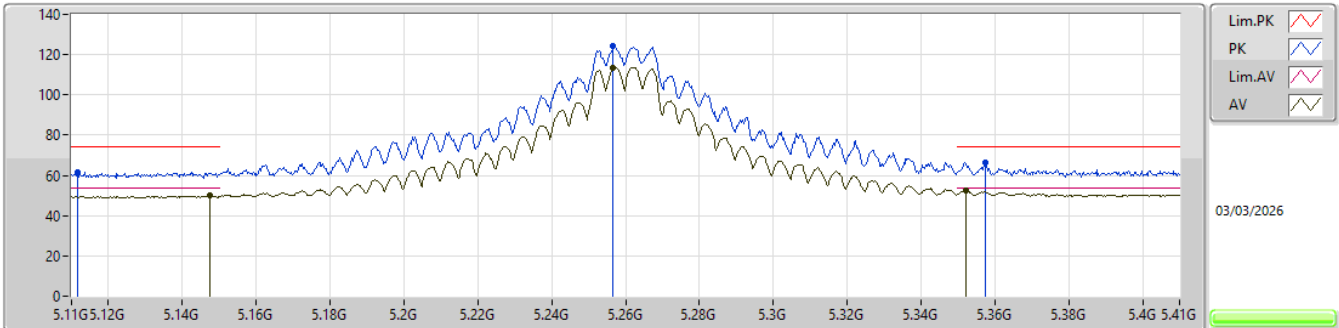


EUT_Y_2TX
SET 28
28
1.30

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1115G	61.59	74.00	-12.41	50.61	3	Vertical	350	1.70	28	33.52	7.57	30.11				
AV	5.1475G	49.90	54.00	-4.10	38.86	3	Vertical	350	1.70	28	33.59	7.58	30.13				
PK	5.2567G	124.05	Inf	-Inf	112.89	3	Vertical	350	1.70	28	33.71	7.63	30.18				
AV	5.2567G	113.71	Inf	-Inf	102.55	3	Vertical	350	1.70	28	33.71	7.63	30.18				
PK	5.3575G	66.63	74.00	-7.37	55.26	3	Vertical	350	1.70	28	33.90	7.71	30.24				
AV	5.3521G	52.70	54.00	-1.30	41.33	3	Vertical	350	1.70	28	33.90	7.70	30.23				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

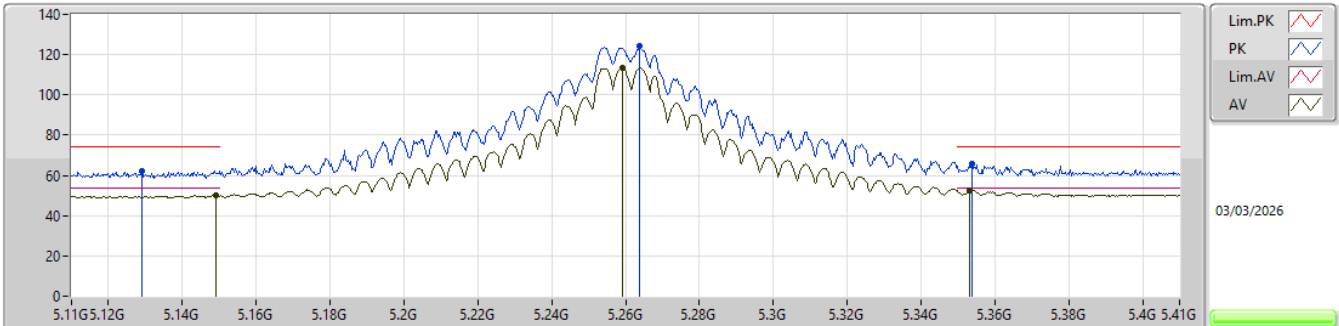


EUT_Y_2TX
SET 28
18\21.5\23\23.5\26.5\28
3.98\3.74\3.79\3.56\2.75\1.37

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1292G	61.99	74.00	-12.01	50.97	3	Horizontal	1	2.02	28	33.56	7.58	30.12			
AV	5.149G	50.12	54.00	-3.88	39.07	3	Horizontal	1	2.02	28	33.60	7.58	30.13			
PK	5.2639G	124.15	Inf	-Inf	112.97	3	Horizontal	1	2.02	28	33.73	7.64	30.19			
AV	5.2591G	113.64	Inf	-Inf	102.47	3	Horizontal	1	2.02	28	33.72	7.63	30.18			
PK	5.3539G	66.01	74.00	-7.99	54.63	3	Horizontal	1	2.02	28	33.90	7.71	30.23			
AV	5.3533G	52.63	54.00	-1.37	41.26	3	Horizontal	1	2.02	28	33.90	7.70	30.23			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

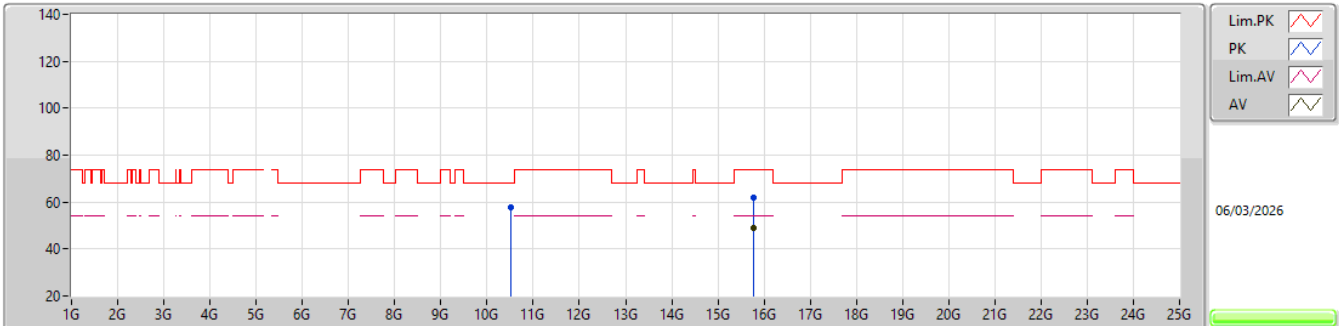


EUT_Y_2TX
SET28

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.50302G	57.54	68.20	-10.66	41.23	3	Vertical	205	1.80	28	39.89	10.72	34.30			
PK	15.7772G	62.14	74.00	-11.86	44.46	3	Vertical	299	1.69	28	38.38	13.75	34.45			
AV	15.77712G	48.88	54.00	-5.12	31.20	3	Vertical	299	1.69	28	38.38	13.75	34.45			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

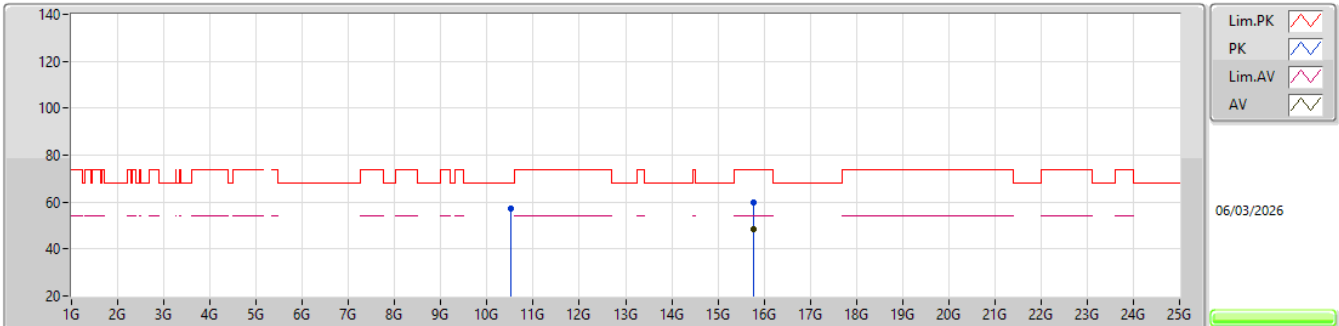


EUT_Y_2TX
SET 28

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.50993G	57.20	68.20	-11.00	40.90	3	Horizontal	112	2.46	28	39.88	10.72	34.30				
PK	15.77912G	59.93	74.00	-14.07	42.26	3	Horizontal	337	1.74	28	38.37	13.75	34.45				
AV	15.77976G	48.52	54.00	-5.48	30.86	3	Horizontal	337	1.74	28	38.36	13.75	34.45				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

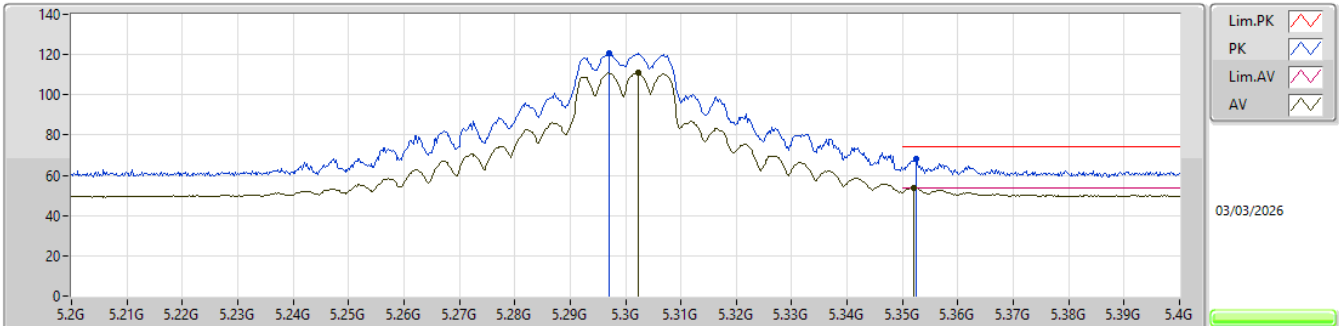


EUT_Y_2TX
SET 24
24
0.08

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.297G	120.81	Inf	-Inf	109.56	3	Vertical	349	1.77	24	33.79	7.66	30.20				
AV	5.3022G	110.88	Inf	-Inf	99.62	3	Vertical	349	1.77	24	33.80	7.67	30.21				
PK	5.3524G	68.38	74.00	-5.62	57.01	3	Vertical	349	1.77	24	33.90	7.70	30.23				
AV	5.352G	53.92	54.00	-0.08	42.55	3	Vertical	349	1.77	24	33.90	7.70	30.23				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

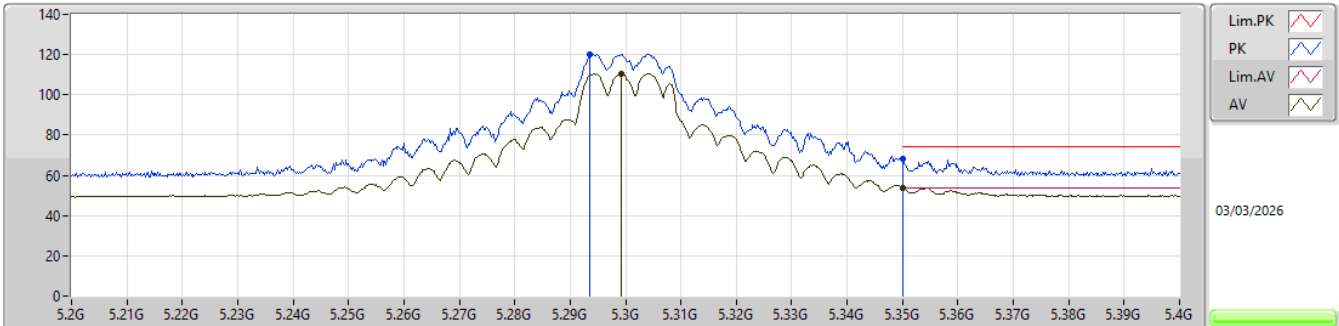


EUT_Y_2TX
SET 24
28\18.5\22.5\24.5\23.5\24
-9.46\4.01\3.04\ -0.69\1.07\0.18

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2936G	120.21	Inf	-Inf	108.96	3	Horizontal	15	1.80	24	33.79	7.66	30.20			
AV	5.2992G	110.62	Inf	-Inf	99.37	3	Horizontal	15	1.80	24	33.80	7.66	30.21			
PK	5.35G	68.20	74.00	-5.80	56.83	3	Horizontal	15	1.80	24	33.90	7.70	30.23			
AV	5.35G	53.82	54.00	-0.18	42.45	3	Horizontal	15	1.80	24	33.90	7.70	30.23			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5300MHz_TX

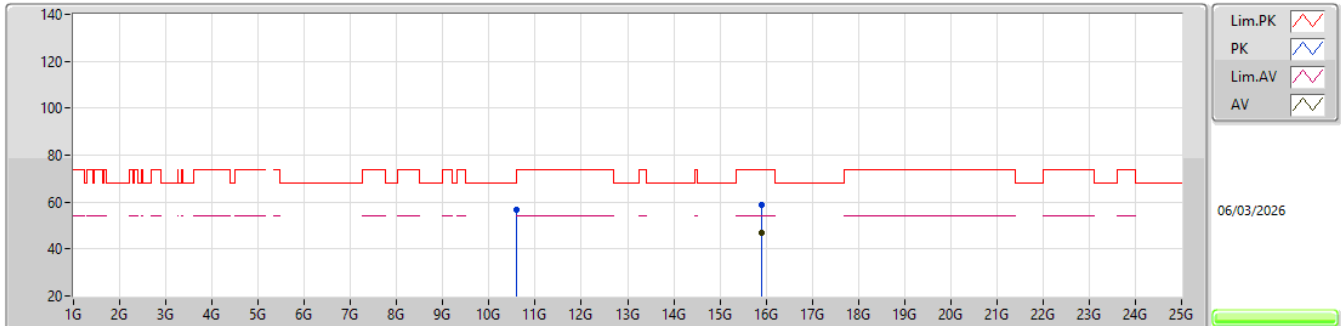EUT_Y_2TX
SET 24

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59353G	56.92	68.20	-11.28	40.61	3	Vertical	31	1.80	24	39.89	10.74	34.32			
PK	15.89433G	58.81	74.00	-15.19	41.24	3	Vertical	27	1.82	24	38.09	13.85	34.37			
AV	15.89936G	46.71	54.00	-7.29	29.13	3	Vertical	27	1.82	24	38.10	13.85	34.37			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

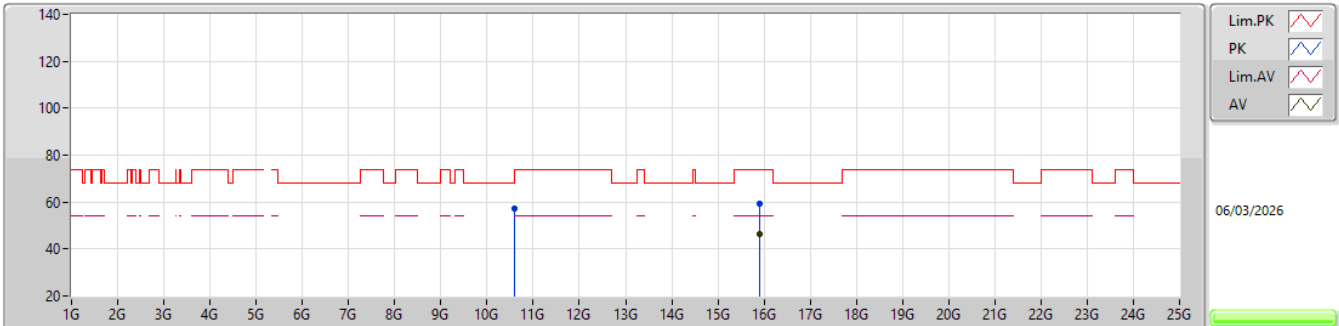


EUT_Y_2TX
SET 24

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.58534G	57.42	68.20	-10.78	41.13	3	Horizontal	242	1.80	24	39.87	10.74	34.32			
PK	15.89253G	59.40	74.00	-14.60	41.84	3	Horizontal	290	2.62	24	38.09	13.84	34.37			
AV	15.89497G	46.59	54.00	-7.41	29.02	3	Horizontal	290	2.62	24	38.09	13.85	34.37			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

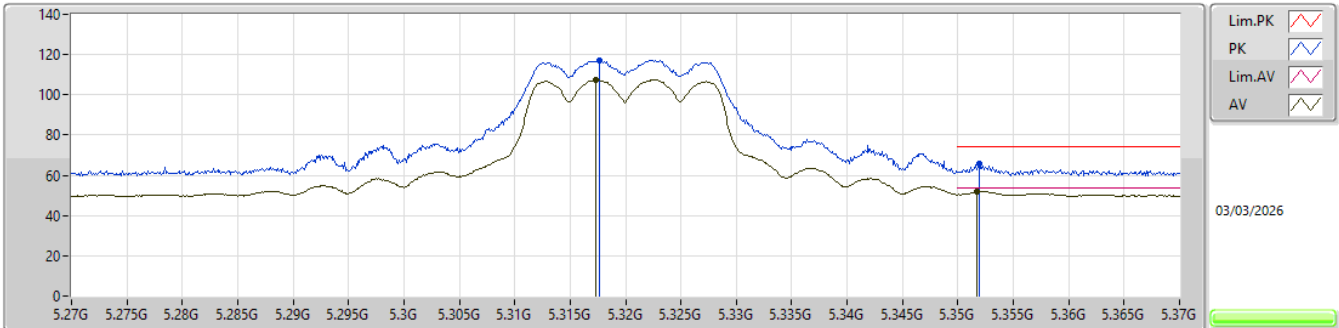


EUT_Y_2TX
SET 20
20
2.03

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3176G	117.34	Inf	-Inf	106.04	3	Vertical	342	1.49	20	33.84	7.68	30.22				
AV	5.3173G	107.39	Inf	-Inf	96.09	3	Vertical	342	1.49	20	33.83	7.68	30.21				
PK	5.3519G	65.59	74.00	-8.41	54.22	3	Vertical	342	1.49	20	33.90	7.70	30.23				
AV	5.3517G	51.97	54.00	-2.03	40.60	3	Vertical	342	1.49	20	33.90	7.70	30.23				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

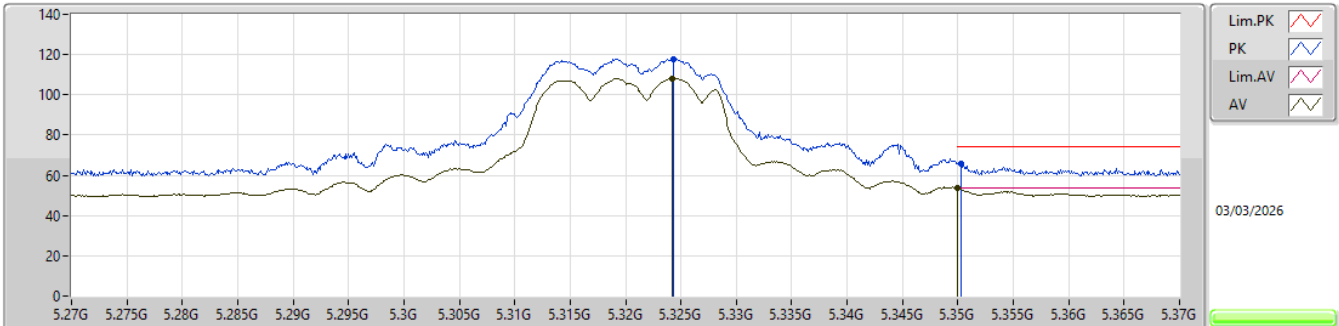


EUT_Y_2TX
SET 20
24\14\19\21.5\20.5\20
-14.01\3.71\2.65\4.76\1.31\0.57

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3243G	117.63	Inf	-Inf	106.32	3	Horizontal	1	1.80	20	33.85	7.68	30.22				
AV	5.3242G	108.12	Inf	-Inf	96.81	3	Horizontal	1	1.80	20	33.85	7.68	30.22				
PK	5.3503G	66.05	74.00	-7.95	54.68	3	Horizontal	1	1.80	20	33.90	7.70	30.23				
AV	5.35G	53.43	54.00	-0.57	42.06	3	Horizontal	1	1.80	20	33.90	7.70	30.23				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5320MHz_TX

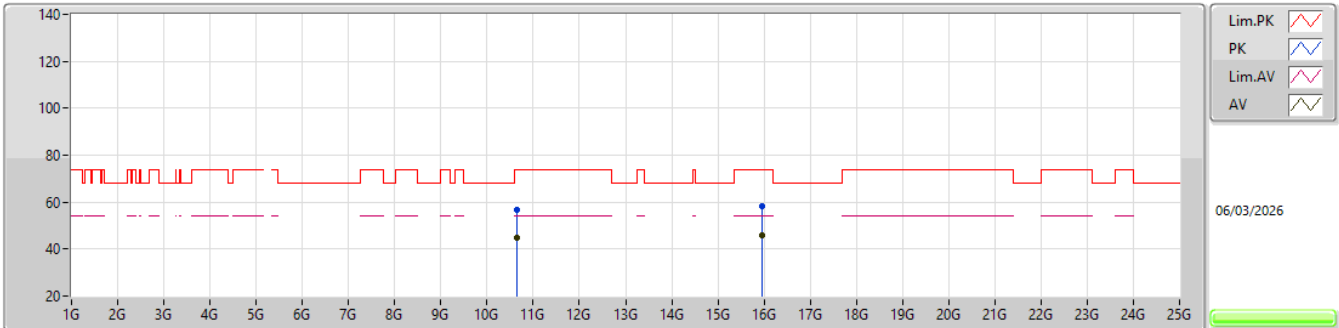EUT_Y_2TX
SET 20

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.65586G	56.52	74.00	-17.48	40.21	3	Vertical	0	1.80	20	39.90	10.75	34.34				
AV	10.65674G	44.79	54.00	-9.21	28.48	3	Vertical	0	1.80	20	39.90	10.75	34.34				
PK	15.95549G	58.21	74.00	-15.79	40.76	3	Vertical	303	1.80	20	37.89	13.89	34.33				
AV	15.96256G	46.05	54.00	-7.95	28.60	3	Vertical	303	1.80	20	37.87	13.90	34.32				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX


5320MHz_TX

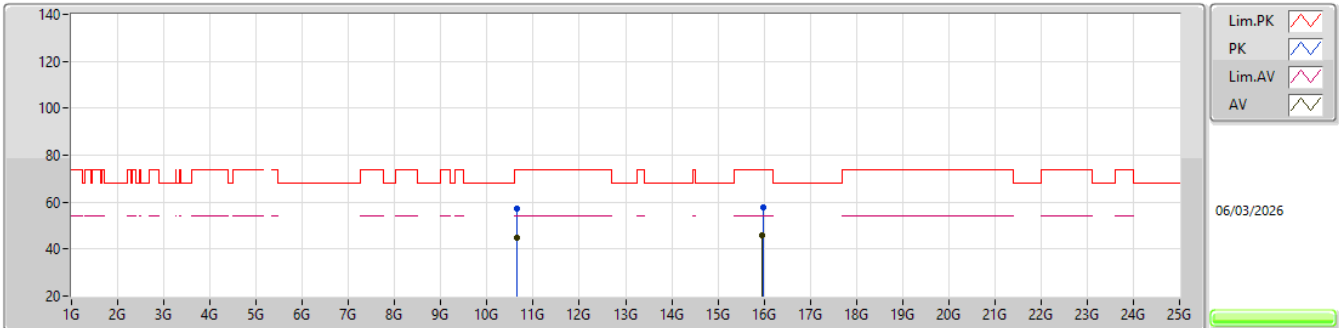EUT_Y_2TX
SET 20

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.64827G	57.17	74.00	-16.83	40.86	3	Horizontal	128	2.92	20	39.90	10.75	34.34			
AV	10.65231G	44.87	54.00	-9.13	28.56	3	Horizontal	128	2.92	20	39.90	10.75	34.34			
PK	15.97926G	57.79	74.00	-16.21	40.35	3	Horizontal	233	2.23	20	37.84	13.91	34.31			
AV	15.96899G	45.81	54.00	-8.19	28.36	3	Horizontal	233	2.23	20	37.86	13.91	34.32			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

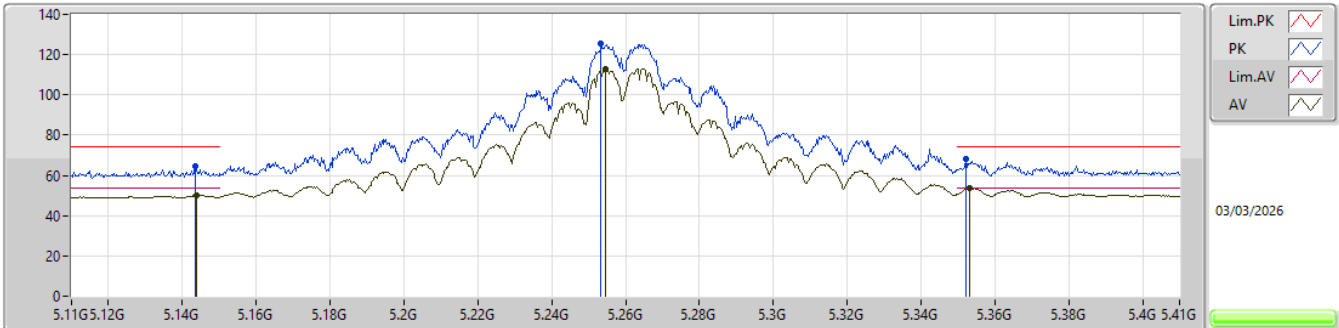


EUT_Y_2TX
SET 28
28
0.25

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1436G	64.62	74.00	-9.38	53.57	3	Vertical	346	1.69	28	33.59	7.58	30.12
AV	5.1439G	50.24	54.00	-3.76	39.19	3	Vertical	346	1.69	28	33.59	7.58	30.12
PK	5.2534G	125.36	Inf	-Inf	114.20	3	Vertical	346	1.69	28	33.71	7.63	30.18
AV	5.2546G	112.97	Inf	-Inf	101.81	3	Vertical	346	1.69	28	33.71	7.63	30.18
PK	5.3521G	68.39	74.00	-5.61	57.02	3	Vertical	346	1.69	28	33.90	7.70	30.23
AV	5.3533G	53.75	54.00	-0.25	42.38	3	Vertical	346	1.69	28	33.90	7.70	30.23

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5260MHz_TX

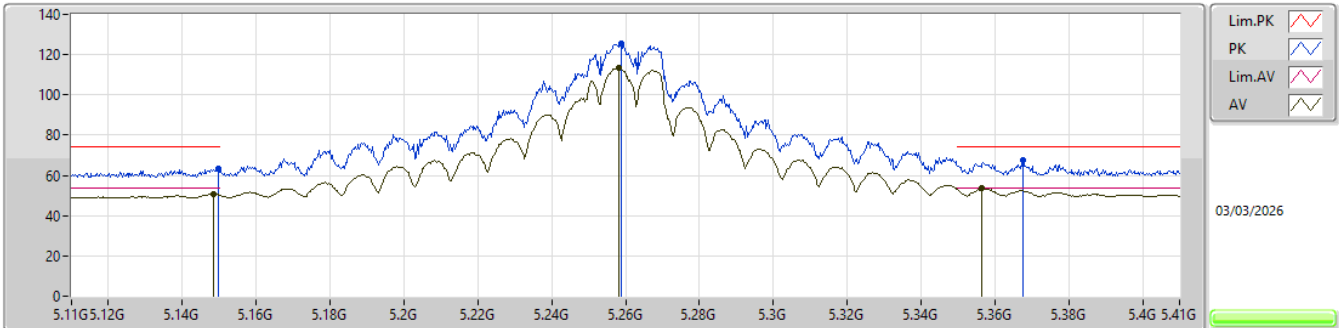


EUT_Y_2TX
SET 28
18\22\26\28
4.32\4.29\2.89\0.56

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1496G	63.52	74.00	-10.48	52.47	3	Horizontal	360	2.04	28	33.60	7.58	30.13			
AV	5.1484G	50.60	54.00	-3.40	39.55	3	Horizontal	360	2.04	28	33.60	7.58	30.13			
PK	5.2588G	125.69	Inf	-Inf	114.52	3	Horizontal	360	2.04	28	33.72	7.63	30.18			
AV	5.2582G	113.22	Inf	-Inf	102.05	3	Horizontal	360	2.04	28	33.72	7.63	30.18			
PK	5.3677G	67.55	74.00	-6.45	56.17	3	Horizontal	360	2.04	28	33.90	7.72	30.24			
AV	5.3566G	53.44	54.00	-0.56	42.07	3	Horizontal	360	2.04	28	33.90	7.71	30.24			

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

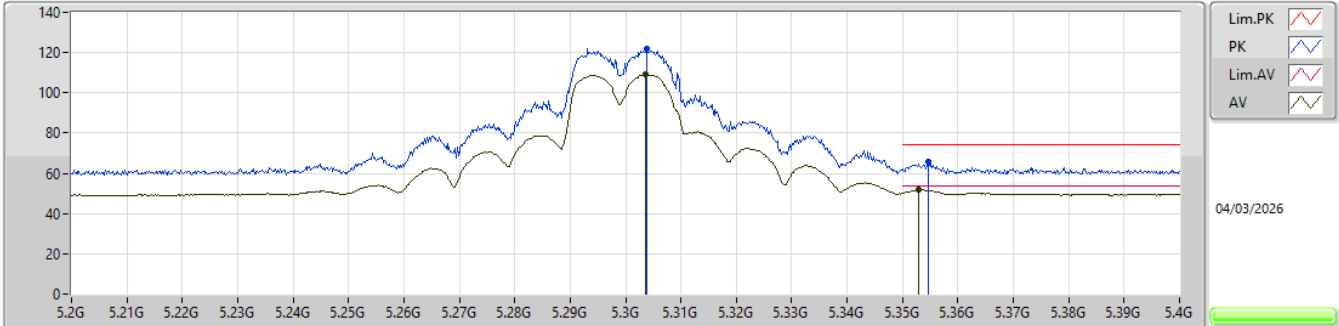


EUT_Y_2TX
SET 22.5
22.5
2.15

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3038G	121.76	Inf	-Inf	110.49	3	Vertical	345	1.76	22.5	33.81	7.67	30.21				
AV	5.3036G	109.10	Inf	-Inf	97.83	3	Vertical	345	1.76	22.5	33.81	7.67	30.21				
PK	5.3546G	65.84	74.00	-8.16	54.46	3	Vertical	345	1.76	22.5	33.90	7.71	30.23				
AV	5.353G	51.85	54.00	-2.15	40.48	3	Vertical	345	1.76	22.5	33.90	7.70	30.23				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5300MHz_TX

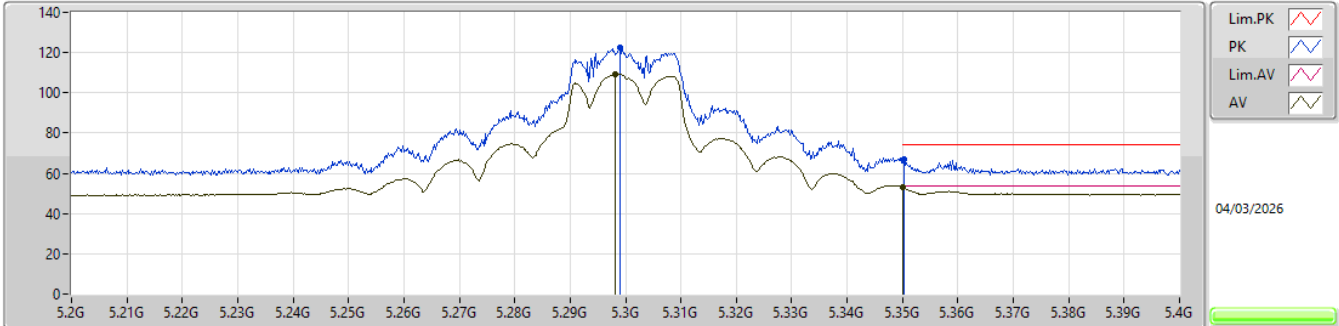


EUT_Y_2TX
SET 22.5
28\18\22\24\23\22.5
-12.90\4.45\2.04\2.82\0.34\0.89

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.299G	122.25	Inf	-Inf	111.00	3	Horizontal	349	1.80	22.5	33.80	7.66	30.21				
AV	5.2982G	109.35	Inf	-Inf	98.10	3	Horizontal	349	1.80	22.5	33.80	7.66	30.21				
PK	5.3502G	66.97	74.00	-7.03	55.60	3	Horizontal	349	1.80	22.5	33.90	7.70	30.23				
AV	5.35G	53.11	54.00	-0.89	41.74	3	Horizontal	349	1.80	22.5	33.90	7.70	30.23				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

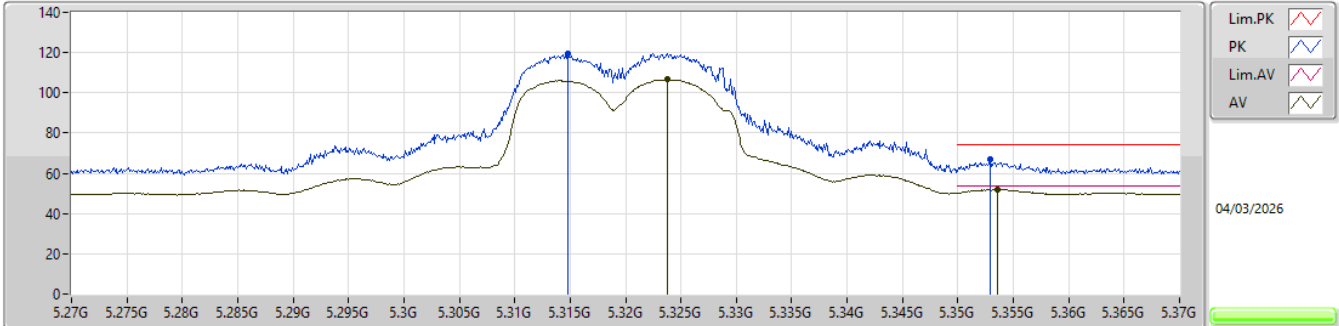


EUT_Y_2TX
SET 19.5
19.5
1.98

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3148G	119.70	Inf	-Inf	108.40	3	Vertical	344	1.74	19.5	33.83	7.68	30.21				
AV	5.3238G	106.65	Inf	-Inf	95.34	3	Vertical	344	1.74	19.5	33.85	7.68	30.22				
PK	5.3529G	66.78	74.00	-7.22	55.41	3	Vertical	344	1.74	19.5	33.90	7.70	30.23				
AV	5.3536G	52.02	54.00	-1.98	40.64	3	Vertical	344	1.74	19.5	33.90	7.71	30.23				

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

5320MHz_TX

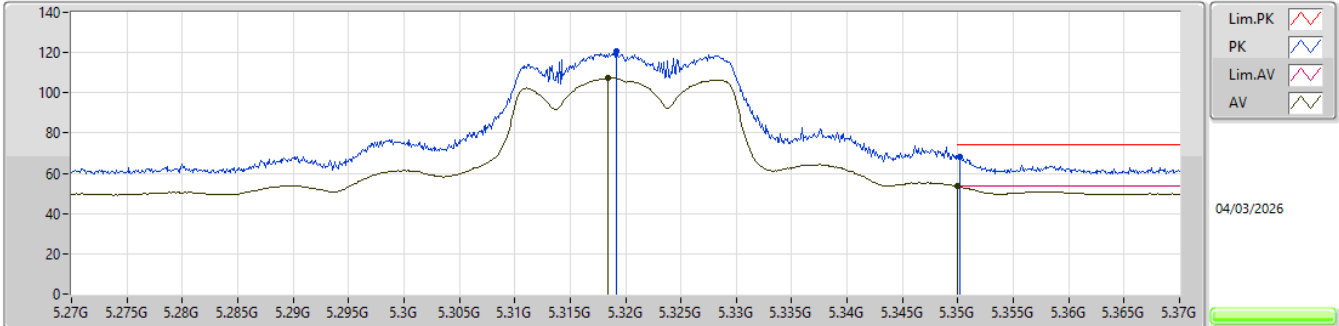


EUT_Y_2TX
SET 19.5
22.5\12.5\16.5\18.5\19.5
-11.47\4.23\3.76\2.78\0.47

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3192G	120.45	Inf	-Inf	109.15	3	Horizontal	360	1.80	19.5	33.84	7.68	30.22			
AV	5.3184G	107.26	Inf	-Inf	95.96	3	Horizontal	360	1.80	19.5	33.84	7.68	30.22			
PK	5.3502G	68.11	74.00	-5.89	56.74	3	Horizontal	360	1.80	19.5	33.90	7.70	30.23			
AV	5.35G	53.53	54.00	-0.47	42.16	3	Horizontal	360	1.80	19.5	33.90	7.70	30.23			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

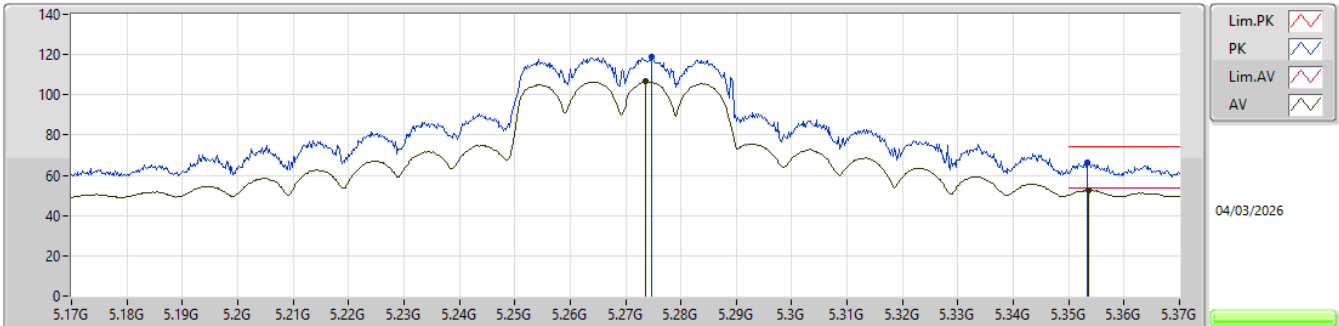


EUT_Y_2TX
SET 21.5
21.5
1.47

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2748G	118.98	Inf	-Inf	107.77	3	Vertical	347	1.77	21.5	33.75	7.65	30.19			
AV	5.2736G	106.54	Inf	-Inf	95.33	3	Vertical	347	1.77	21.5	33.75	7.65	30.19			
PK	5.3534G	66.42	74.00	-7.58	55.04	3	Vertical	347	1.77	21.5	33.90	7.71	30.23			
AV	5.3536G	52.53	54.00	-1.47	41.15	3	Vertical	347	1.77	21.5	33.90	7.71	30.23			

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5270MHz_TX

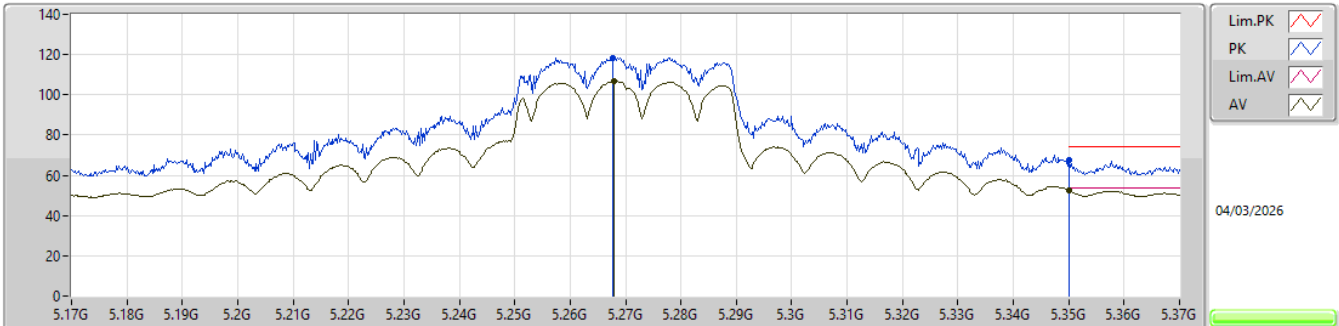


EUT_Y_2TX
SET 21.5
18\22\20\21\21.5
4.40\ -0.07\3.70\2.50\1.20

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2678G	118.53	Inf	-Inf	107.34	3	Horizontal	356	2.01	21.5	33.74	7.64	30.19				
AV	5.268G	107.02	Inf	-Inf	95.83	3	Horizontal	356	2.01	21.5	33.74	7.64	30.19				
PK	5.35G	67.29	74.00	-6.71	55.92	3	Horizontal	356	2.01	21.5	33.90	7.70	30.23				
AV	5.35G	52.80	54.00	-1.20	41.43	3	Horizontal	356	2.01	21.5	33.90	7.70	30.23				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

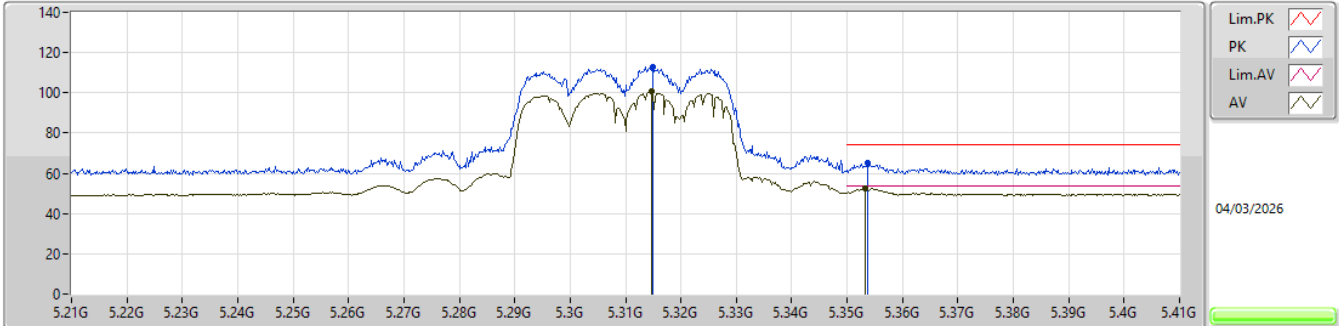


EUT_Y_2TX
SET 16
16
1.58

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.315G	113.00	Inf	-Inf	101.70	3	Vertical	343	1.49	16	33.83	7.68	30.21				
AV	5.3148G	100.71	Inf	-Inf	89.41	3	Vertical	343	1.49	16	33.83	7.68	30.21				
PK	5.3538G	65.46	74.00	-8.54	54.08	3	Vertical	343	1.49	16	33.90	7.71	30.23				
AV	5.3532G	52.42	54.00	-1.58	41.05	3	Vertical	343	1.49	16	33.90	7.70	30.23				

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

5310MHz_TX

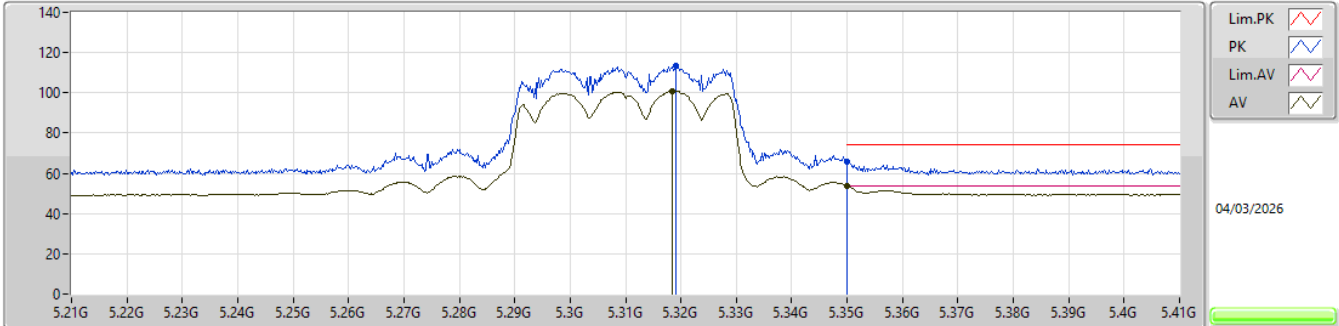


EUT_Y_2TX
SET 16
21.5\11.5\16.5\14\15\15.5\16
-14.12\3.56\0.32\2.17\1.32\0.74\0.28

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.319G	113.27	Inf	-Inf	101.97	3	Horizontal	360	1.80	16	33.84	7.68	30.22			
AV	5.3184G	100.80	Inf	-Inf	89.50	3	Horizontal	360	1.80	16	33.84	7.68	30.22			
PK	5.35G	65.76	74.00	-8.24	54.39	3	Horizontal	360	1.80	16	33.90	7.70	30.23			
AV	5.35G	53.72	54.00	-0.28	42.35	3	Horizontal	360	1.80	16	33.90	7.70	30.23			

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

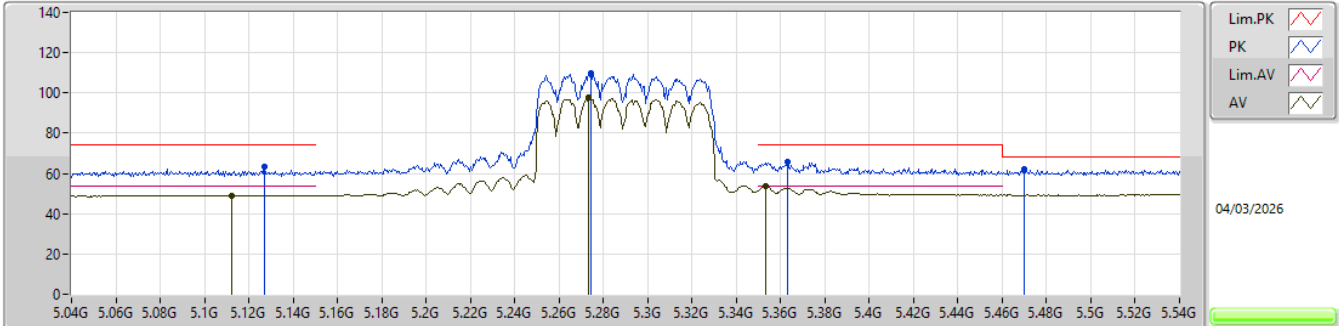


EUT_Y_2TX
SET 15.5
15.5
0.37

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.127G	63.11	74.00	-10.89	52.10	3	Vertical	349	1.80	15.5	33.55	7.58	30.12				
AV	5.1125G	49.07	54.00	-4.93	38.09	3	Vertical	349	1.80	15.5	33.52	7.57	30.11				
PK	5.2745G	110.01	Inf	-Inf	98.80	3	Vertical	349	1.80	15.5	33.75	7.65	30.19				
AV	5.2735G	97.54	Inf	-Inf	86.33	3	Vertical	349	1.80	15.5	33.75	7.65	30.19				
PK	5.363G	65.57	74.00	-8.43	54.20	3	Vertical	349	1.80	15.5	33.90	7.71	30.24				
AV	5.3535G	53.63	54.00	-0.37	42.25	3	Vertical	349	1.80	15.5	33.90	7.71	30.23				
PK	5.47G	61.86	68.20	-6.34	50.43	3	Vertical	349	1.80	15.5	33.94	7.78	30.29				

5.25-5.35GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

5290MHz_TX

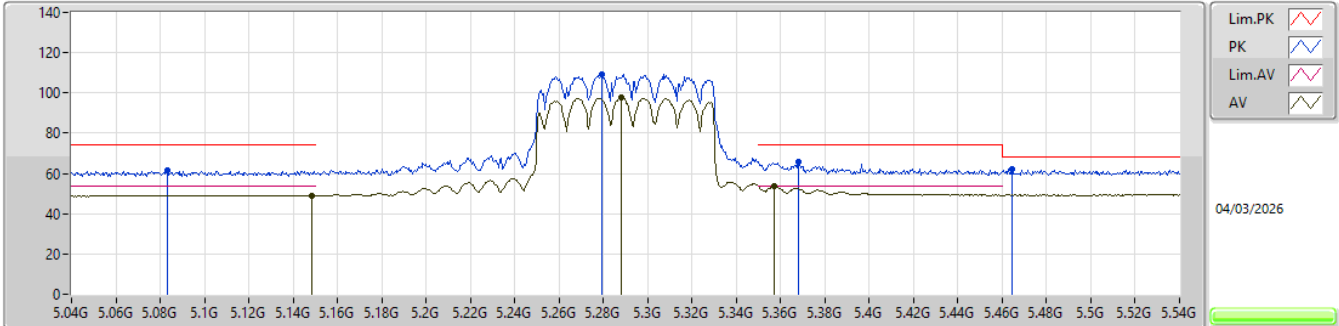


EUT_Y_2TX
SET 15.5
18\14\16\15\15.5
-3.71\2.01\0.50\0.89\0.23

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.0835G	61.65	74.00	-12.35	50.70	3	Horizontal	356	1.90	15.5	33.47	7.57	30.09
AV	5.1485G	49.08	54.00	-4.92	38.03	3	Horizontal	356	1.90	15.5	33.60	7.58	30.13
PK	5.2795G	109.33	Inf	-Inf	98.12	3	Horizontal	356	1.90	15.5	33.76	7.65	30.20
AV	5.288G	97.63	Inf	-Inf	86.39	3	Horizontal	356	1.90	15.5	33.78	7.66	30.20
PK	5.368G	65.62	74.00	-8.38	54.24	3	Horizontal	356	1.90	15.5	33.90	7.72	30.24
AV	5.357G	53.77	54.00	-0.23	42.40	3	Horizontal	356	1.90	15.5	33.90	7.71	30.24
PK	5.4645G	61.99	68.20	-6.21	50.57	3	Horizontal	356	1.90	15.5	33.93	7.78	30.29

5.15-5.25GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

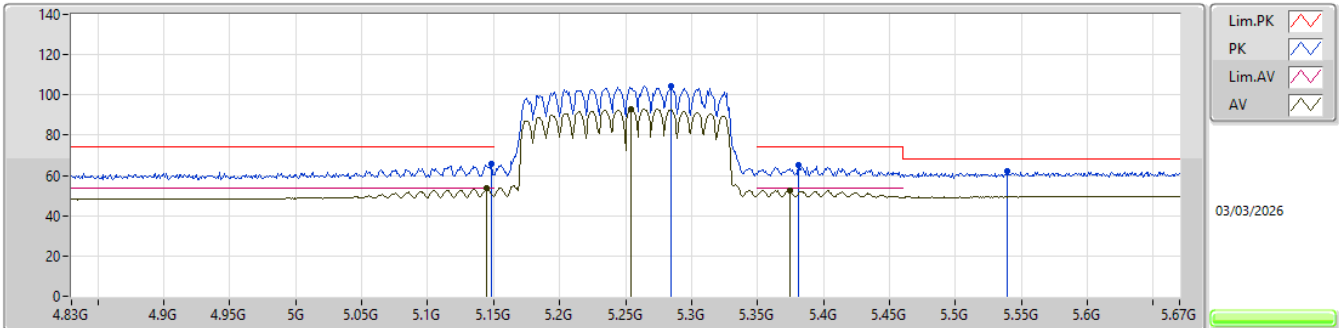


EUT_Y_2TX
SET 13
13
0.59

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.14836G	65.97	74.00	-8.03	54.92	3	Vertical	350	1.68	13	33.60	7.58	30.13			
AV	5.145G	53.41	54.00	-0.59	42.37	3	Vertical	350	1.68	13	33.59	7.58	30.13			
PK	5.28444G	104.67	Inf	-Inf	93.45	3	Vertical	350	1.68	13	33.77	7.65	30.20			
AV	5.2542G	92.96	Inf	-Inf	81.80	3	Vertical	350	1.68	13	33.71	7.63	30.18			
PK	5.38104G	65.05	74.00	-8.95	53.67	3	Vertical	350	1.68	13	33.90	7.73	30.25			
AV	5.37432G	52.43	54.00	-1.57	41.05	3	Vertical	350	1.68	13	33.90	7.72	30.24			
PK	5.5398G	62.08	68.20	-6.12	50.48	3	Vertical	350	1.68	13	34.08	7.82	30.30			

5.15-5.25GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

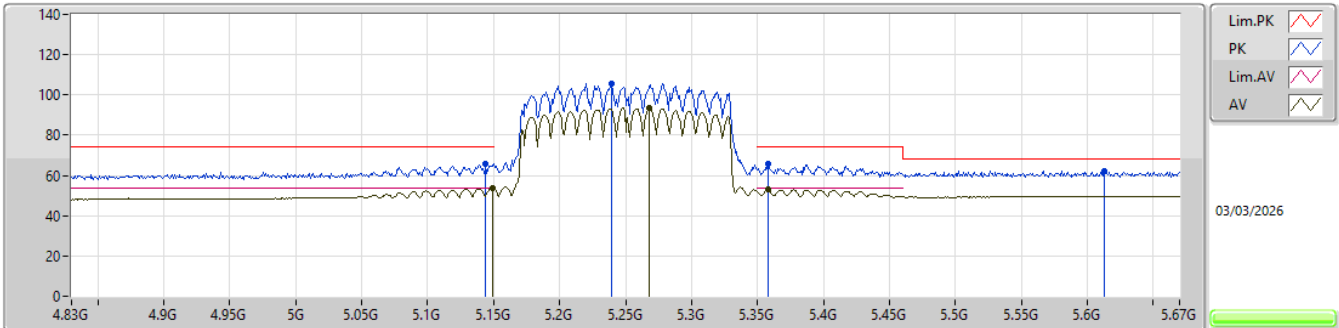

EUT_Y_2TX
SET 13
18\12\15\13.5\13
-5.78\1.64\2.59\1.16\0.06

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.14416G	65.69	74.00	-8.31	54.64	3	Horizontal	360	1.93	13	33.59	7.58	30.12
AV	5.1492G	53.94	54.00	-0.06	42.89	3	Horizontal	360	1.93	13	33.60	7.58	30.13
PK	5.23908G	105.51	Inf	-Inf	94.36	3	Horizontal	360	1.93	13	33.70	7.62	30.17
AV	5.26764G	93.57	Inf	-Inf	82.38	3	Horizontal	360	1.93	13	33.74	7.64	30.19
PK	5.35836G	65.66	74.00	-8.34	54.29	3	Horizontal	360	1.93	13	33.90	7.71	30.24
AV	5.35836G	52.96	54.00	-1.04	41.59	3	Horizontal	360	1.93	13	33.90	7.71	30.24
PK	5.61288G	62.27	68.20	-5.93	50.66	3	Horizontal	360	1.93	13	34.00	7.88	30.27




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	5.353G	53.94	54.00	-0.06	3	Horizontal	13	1.80	22

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

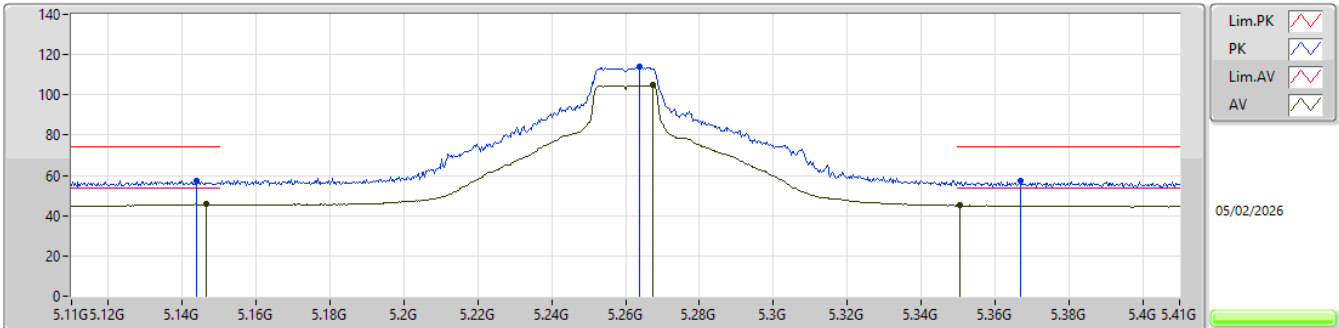


EUT_Y_1TX
SET 26
17.26
9.14\8.34

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1439G	57.22	74.00	-16.78	60.62	3	Vertical	27	2.04	26	32.06	8.39	43.85				
AV	5.1466G	45.66	54.00	-8.34	49.04	3	Vertical	27	2.04	26	32.08	8.39	43.85				
PK	5.2639G	113.88	Inf	-Inf	117.82	3	Vertical	27	2.04	26	31.44	8.44	43.82				
AV	5.2675G	104.85	Inf	-Inf	108.79	3	Vertical	27	2.04	26	31.43	8.44	43.81				
PK	5.3671G	57.44	74.00	-16.56	61.34	3	Vertical	27	2.04	26	31.40	8.48	43.78				
AV	5.3506G	44.97	54.00	-9.03	48.89	3	Vertical	27	2.04	26	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5260MHz_TX

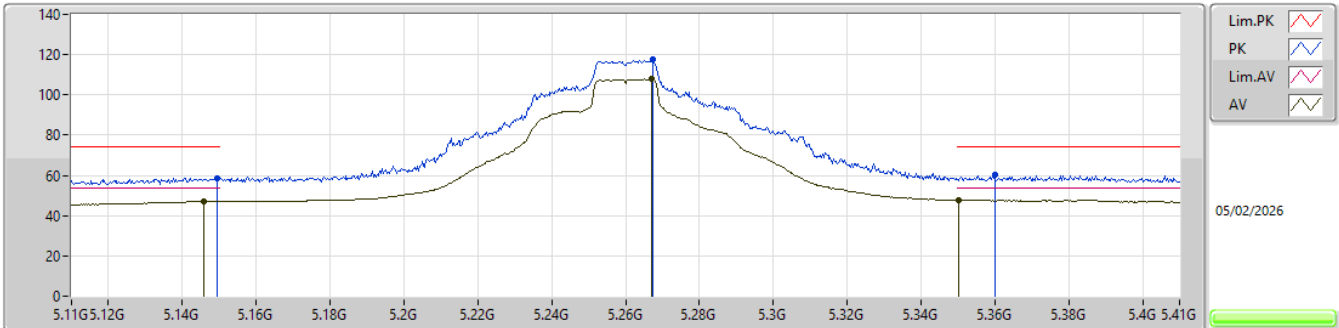


EUT_Y_1TX
SET 26
26
6.29

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1493G	58.83	74.00	-15.17	62.19	3	Horizontal	19	1.80	26	32.10	8.39	43.85			
AV	5.1457G	47.17	54.00	-6.83	50.56	3	Horizontal	19	1.80	26	32.07	8.39	43.85			
PK	5.2675G	117.61	Inf	-Inf	121.55	3	Horizontal	19	1.80	26	31.43	8.44	43.81			
AV	5.2672G	107.99	Inf	-Inf	111.93	3	Horizontal	19	1.80	26	31.43	8.44	43.81			
PK	5.3599G	60.11	74.00	-13.89	64.01	3	Horizontal	19	1.80	26	31.40	8.48	43.78			
AV	5.3503G	47.71	54.00	-6.29	51.63	3	Horizontal	19	1.80	26	31.40	8.47	43.79			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

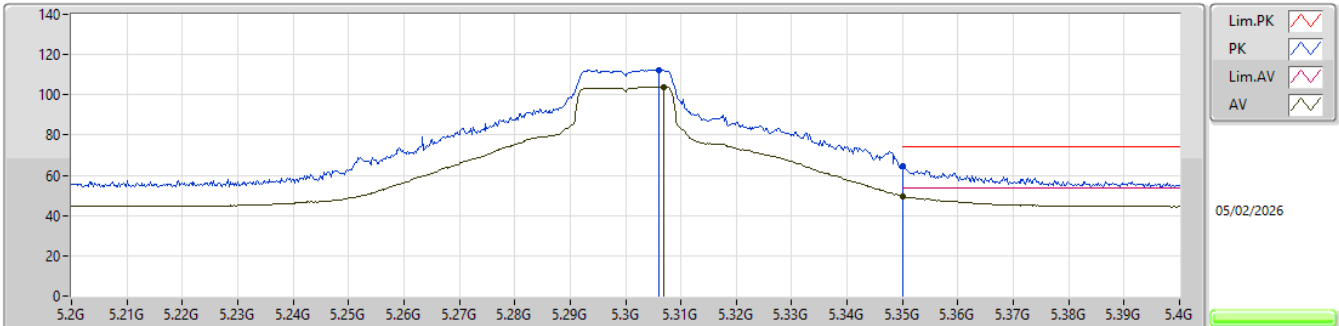


EUT_Y_1TX
SET 25
17.26\16\21\23.5\24.5\25\25.5\25
9.99\ -21.93\10.06\9.24\7.98\5.96\4.38\ -2.90\4.36

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.306G	112.49	Inf	-Inf	116.52	3	Vertical	25	2.06	25	31.31	8.46	43.80				
AV	5.307G	103.81	Inf	-Inf	107.84	3	Vertical	25	2.06	25	31.31	8.46	43.80				
PK	5.35G	64.39	74.00	-9.61	68.31	3	Vertical	25	2.06	25	31.40	8.47	43.79				
AV	5.35G	49.64	54.00	-4.36	53.56	3	Vertical	25	2.06	25	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5300MHz_TX

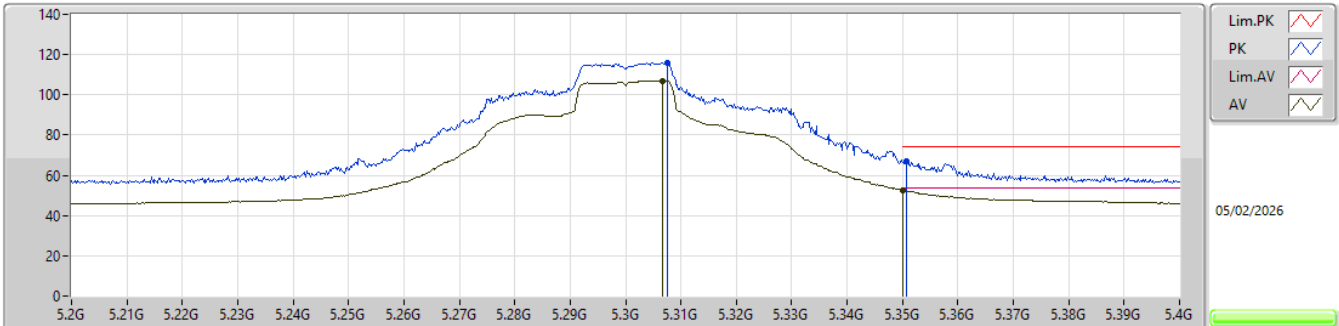


EUT_Y_1TX
SET 24.5
25\23.5\24.5
-1.14\4.94\1.24

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3076G	116.09	Inf	-Inf	120.11	3	Horizontal	1	1.80	24.5	31.32	8.46	43.80			
AV	5.3066G	106.91	Inf	-Inf	110.94	3	Horizontal	1	1.80	24.5	31.31	8.46	43.80			
PK	5.3508G	66.95	74.00	-7.05	70.87	3	Horizontal	1	1.80	24.5	31.40	8.47	43.79			
AV	5.35G	52.76	54.00	-1.24	56.68	3	Horizontal	1	1.80	24.5	31.40	8.47	43.79			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

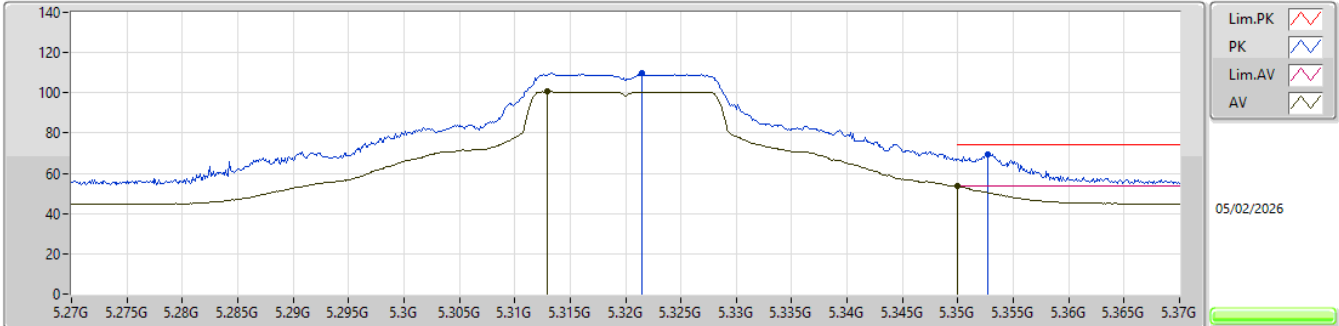


EUT_Y_1TX
SET 21.5
17\26\16\21\23.5\22.5\22\21.5
9.56\ -29.50\9.75\2.82\ -7.86\ -4.39\ -1.84\0.46

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3215G	109.65	Inf	-Inf	113.65	3	Vertical	13	3.00	21.5	31.34	8.46	43.80				
AV	5.3129G	100.63	Inf	-Inf	104.64	3	Vertical	13	3.00	21.5	31.33	8.46	43.80				
PK	5.3527G	69.42	74.00	-4.58	73.34	3	Vertical	13	3.00	21.5	31.40	8.47	43.79				
AV	5.35G	53.54	54.00	-0.46	57.46	3	Vertical	13	3.00	21.5	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

5320MHz_TX

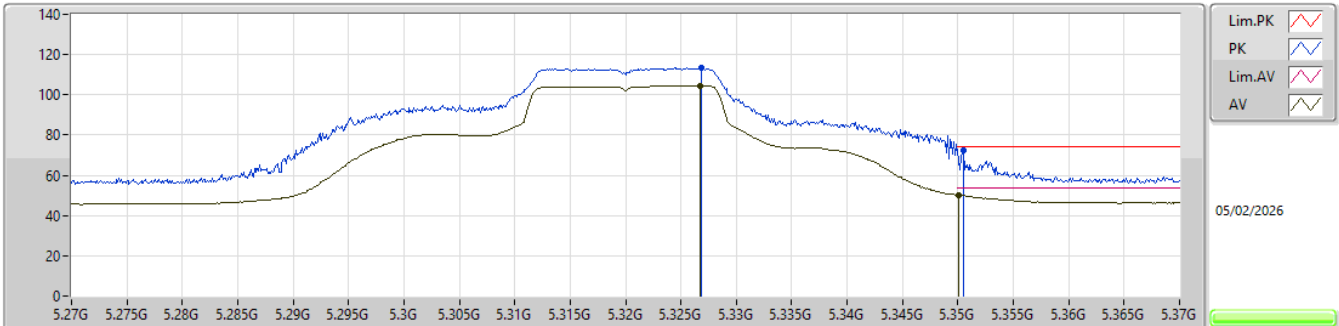


EUT_Y_1TX
SET 19
21.5\11.5\21\16.5\18.5\19.5\19
-12.34\9.52\ -9.88\7.59\4.63\ -3.74\1.63

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3268G	113.65	Inf	-Inf	117.64	3	Horizontal	29	1.80	19	31.35	8.46	43.80			
AV	5.3267G	104.35	Inf	-Inf	108.34	3	Horizontal	29	1.80	19	31.35	8.46	43.80			
PK	5.3505G	72.37	74.00	-1.63	76.29	3	Horizontal	29	1.80	19	31.40	8.47	43.79			
AV	5.3501G	50.22	54.00	-3.78	54.14	3	Horizontal	29	1.80	19	31.40	8.47	43.79			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5260MHz_TX

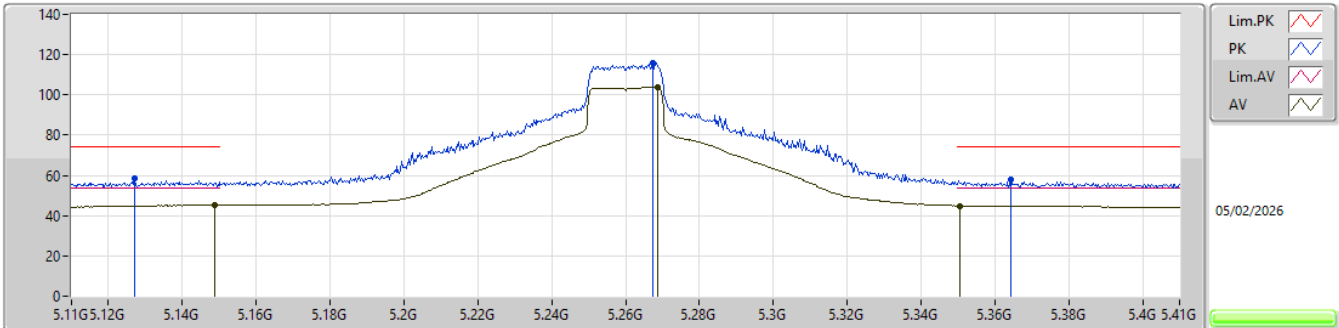


EUT_V_1TX
SET 26
17.26
9.61\8.72

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1271G	58.33	74.00	-15.67	61.85	3	Vertical	27	2.03	26	31.96	8.38	43.86				
AV	5.1487G	45.28	54.00	-8.72	48.65	3	Vertical	27	2.03	26	32.09	8.39	43.85				
PK	5.2675G	115.68	Inf	-Inf	119.62	3	Vertical	27	2.03	26	31.43	8.44	43.81				
AV	5.2687G	103.93	Inf	-Inf	107.87	3	Vertical	27	2.03	26	31.43	8.44	43.81				
PK	5.3644G	57.92	74.00	-16.08	61.82	3	Vertical	27	2.03	26	31.40	8.48	43.78				
AV	5.3506G	44.86	54.00	-9.14	48.78	3	Vertical	27	2.03	26	31.40	8.47	43.79				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5260MHz_TX

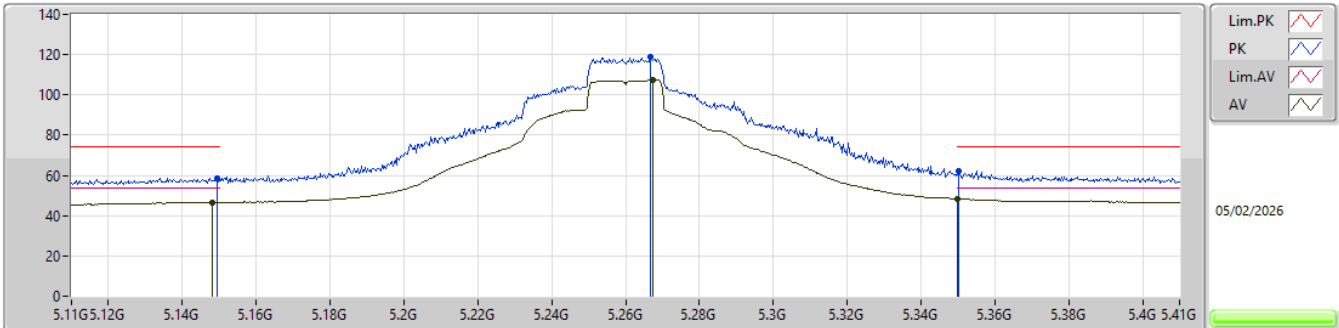


EUT_V_1TX
SET 26
5.52

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1493G	58.46	74.00	-15.54	61.82	3	Horizontal	35	1.80	26	32.10	8.39	43.85			
AV	5.1481G	46.76	54.00	-7.24	50.13	3	Horizontal	35	1.80	26	32.09	8.39	43.85			
PK	5.2666G	118.62	Inf	-Inf	122.56	3	Horizontal	35	1.80	26	31.43	8.44	43.81			
AV	5.2675G	107.37	Inf	-Inf	111.31	3	Horizontal	35	1.80	26	31.43	8.44	43.81			
PK	5.3503G	62.29	74.00	-11.71	66.21	3	Horizontal	35	1.80	26	31.40	8.47	43.79			
AV	5.35G	48.48	54.00	-5.52	52.40	3	Horizontal	35	1.80	26	31.40	8.47	43.79			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5300MHz_TX

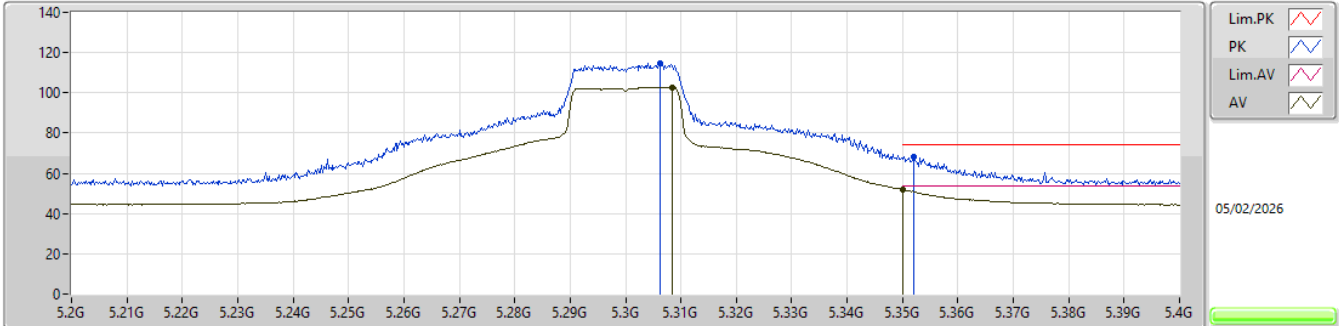


EUT_Y_1TX
SET 24.5
17\26\16\21\23.5\24.5\25\24.5
9.81\22.89\9.53\8.71\5.80\1.03\1.79\2.10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3062G	114.79	Inf	-Inf	118.82	3	Vertical	23	2.12	24.5	31.31	8.46	43.80				
AV	5.3084G	102.56	Inf	-Inf	106.58	3	Vertical	23	2.12	24.5	31.32	8.46	43.80				
PK	5.352G	68.37	74.00	-5.63	72.29	3	Vertical	23	2.12	24.5	31.40	8.47	43.79				
AV	5.35G	51.90	54.00	-2.10	55.82	3	Vertical	23	2.12	24.5	31.40	8.47	43.79				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5300MHz_TX

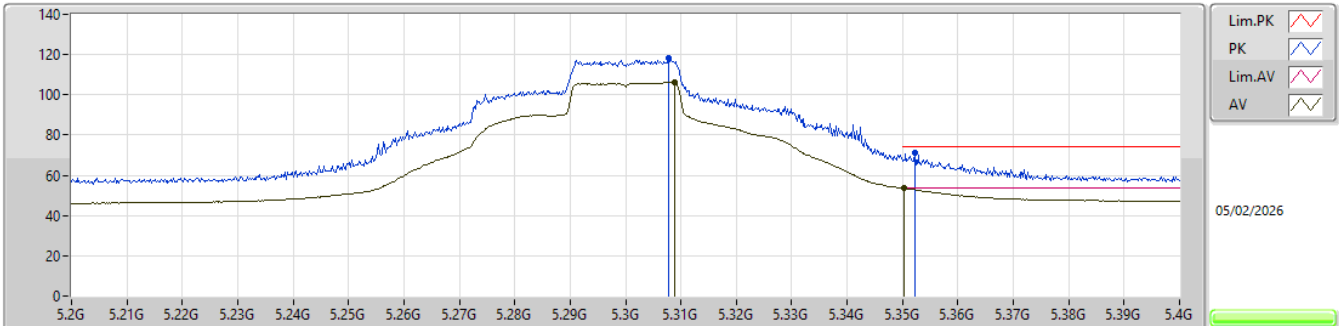


EUT_Y_1TX
SET 23.5
24.5\20\24\22\23\23.5
-4.40\7.41\ -1.85\5.56\2.99\0.31

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3078G	118.19	Inf	-Inf	122.21	3	Horizontal	34	1.80	23.5	31.32	8.46	43.80			
AV	5.3088G	106.06	Inf	-Inf	110.08	3	Horizontal	34	1.80	23.5	31.32	8.46	43.80			
PK	5.3522G	71.15	74.00	-2.85	75.07	3	Horizontal	34	1.80	23.5	31.40	8.47	43.79			
AV	5.3502G	53.69	54.00	-0.31	57.61	3	Horizontal	34	1.80	23.5	31.40	8.47	43.79			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5320MHz_TX

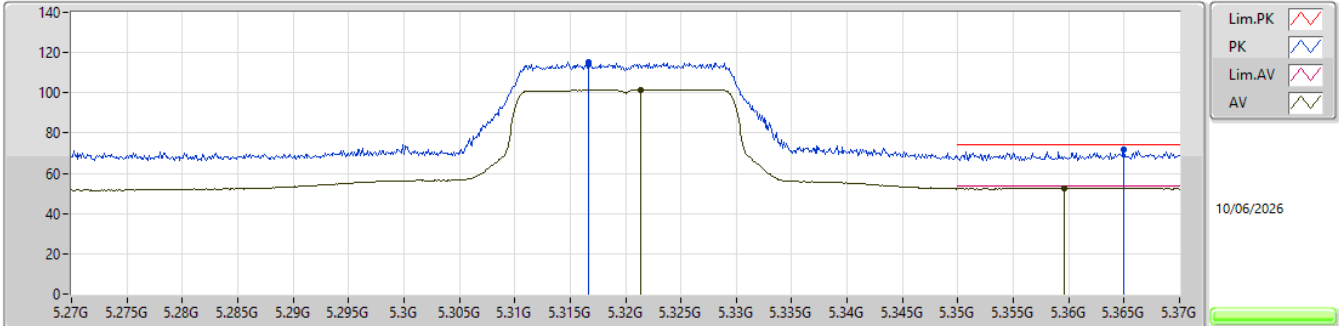


EUT_Y_1TX
SET 23.5
18.5\25.5\17.5\21.5\23.5\24.5\24\23.5
7.34\12.61\7.42\5.64\1.13\6.33\3.09\1.33

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3167G	115.16	Inf	-Inf	108.63	3	Vertical	360	1.80	23.5	33.23	8.35	35.05				
AV	5.3214G	101.56	Inf	-Inf	95.01	3	Vertical	360	1.80	23.5	33.24	8.35	35.04				
PK	5.365G	71.80	74.00	-2.20	65.11	3	Vertical	360	1.80	23.5	33.33	8.39	35.03				
AV	5.3596G	52.67	54.00	-1.33	45.99	3	Vertical	360	1.80	23.5	33.32	8.39	35.03				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

5320MHz_TX

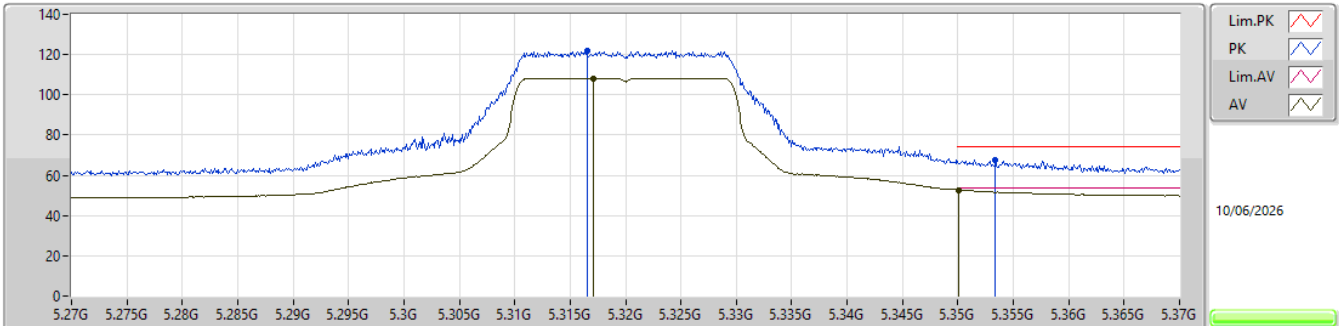


EUT_Y_1TX
SET 21
23.5\17.5\21.5\19.5\20.5\21
-5.69\4.35\0.17\3.76\2.71\1.24

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3165G	122.04	Inf	-Inf	115.51	3	Horizontal	0	1.80	21	33.23	8.35	35.05				
AV	5.3171G	108.25	Inf	-Inf	101.72	3	Horizontal	0	1.80	21	33.23	8.35	35.05				
PK	5.3534G	67.38	74.00	-6.62	60.72	3	Horizontal	0	1.80	21	33.31	8.38	35.03				
AV	5.3501G	52.76	54.00	-1.24	46.11	3	Horizontal	0	1.80	21	33.30	8.38	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5270MHz_TX

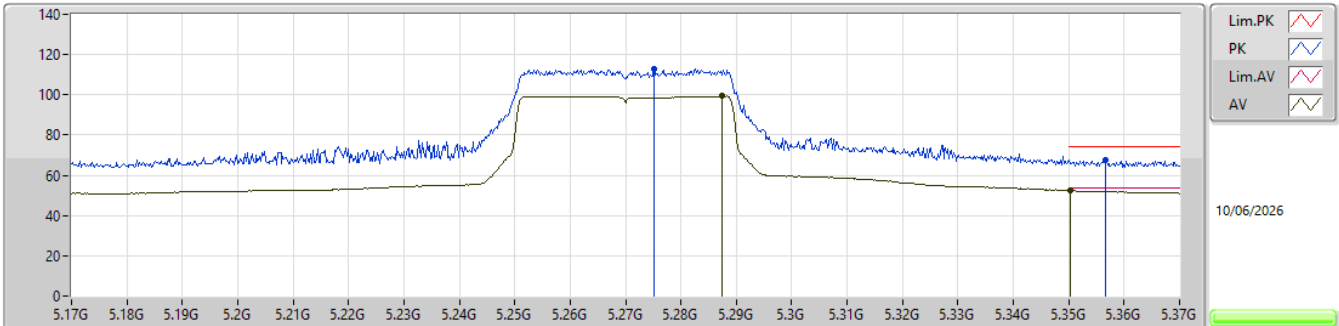


EUT_Y_1TX
SET 24.5
22.5\26\21.5\23.5\24.5\25\24.5
6.84\ -11.04\6.97\5.94\1.58\ -0.91\1.66

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2752G	112.58	Inf	-Inf	106.18	3	Vertical	2	1.80	24.5	33.15	8.31	35.06			
AV	5.2874G	99.32	Inf	-Inf	92.89	3	Vertical	2	1.80	24.5	33.17	8.32	35.06			
PK	5.3566G	67.82	74.00	-6.18	61.16	3	Vertical	2	1.80	24.5	33.31	8.38	35.03			
AV	5.3502G	52.34	54.00	-1.66	45.69	3	Vertical	2	1.80	24.5	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5270MHz_TX

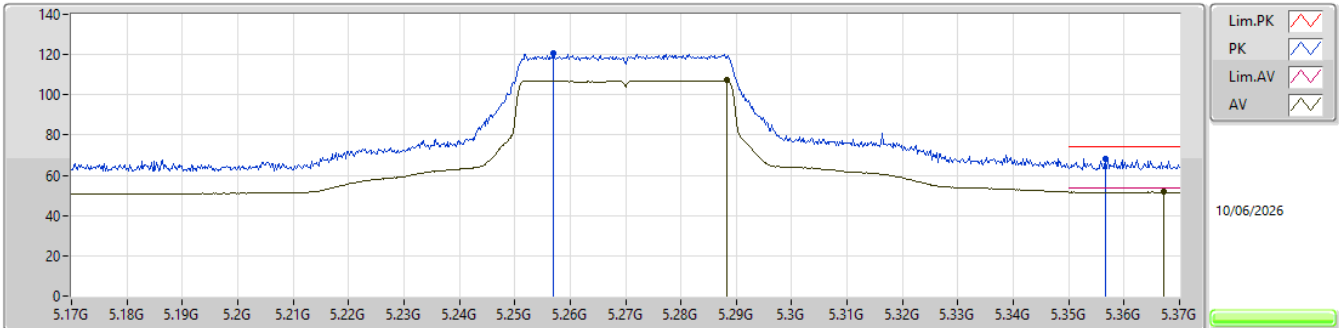


EUT_Y_1TX
SET 23
24.5\18\23\25.5\23
-6.09\5.04\2.25\16.06\2.30

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.257G	120.65	Inf	-Inf	114.31	3	Horizontal	9	1.80	23	33.11	8.30	35.07			
AV	5.2884G	107.15	Inf	-Inf	100.70	3	Horizontal	9	1.80	23	33.18	8.33	35.06			
PK	5.3566G	68.35	74.00	-5.65	61.69	3	Horizontal	9	1.80	23	33.31	8.38	35.03			
AV	5.3672G	51.70	54.00	-2.30	45.01	3	Horizontal	9	1.80	23	33.33	8.39	35.03			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5310MHz_TX

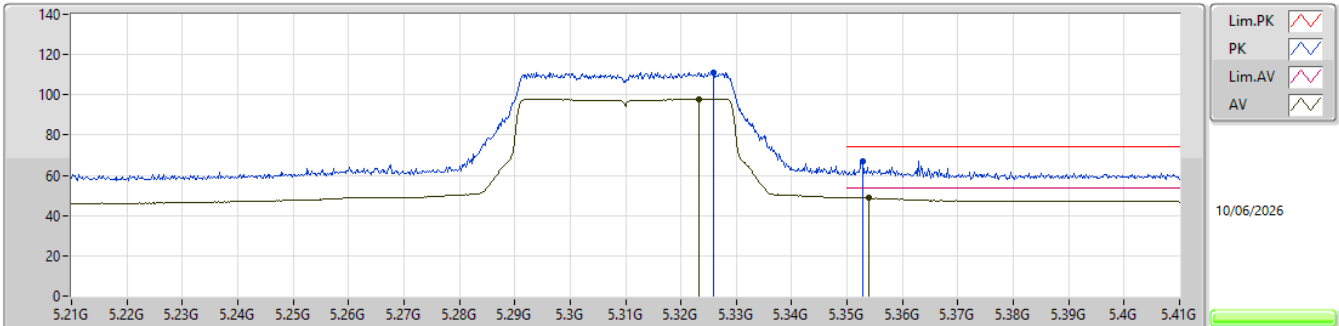


EUT_Y_1TX
SET 22.5
15\22.5\26\24.5\24\21\22.5
7.64\5.57\30.32\9.62\4.17\6.28\5.13

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3258G	111.31	Inf	-Inf	104.74	3	Vertical	0	1.80	22.5	33.25	8.36	35.04				
AV	5.3232G	97.85	Inf	-Inf	91.29	3	Vertical	0	1.80	22.5	33.25	8.35	35.04				
PK	5.3528G	67.11	74.00	-6.89	60.45	3	Vertical	0	1.80	22.5	33.31	8.38	35.03				
AV	5.354G	48.87	54.00	-5.13	42.21	3	Vertical	0	1.80	22.5	33.31	8.38	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

5310MHz_TX

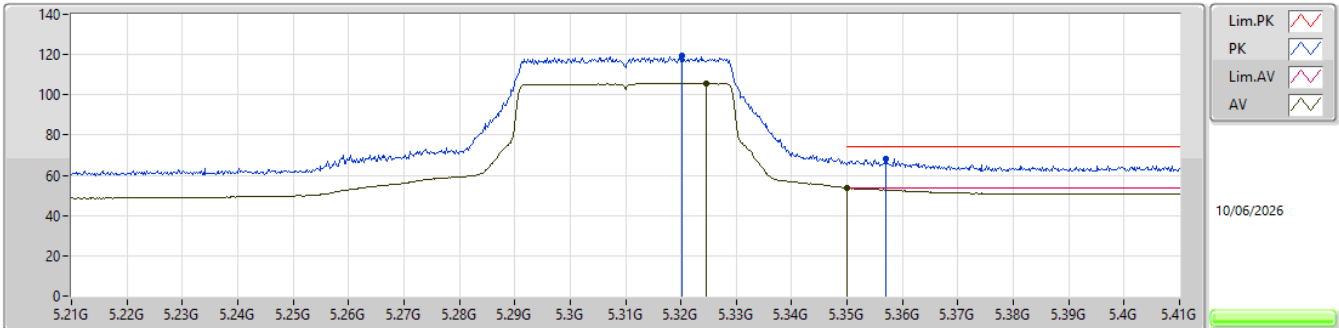


EUT_Y_1TX
SET 21
22.5\19.5\21\21.5\21
-2.79\3.23\0.78\0.98\0.36

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3202G	119.25	Inf	-Inf	112.70	3	Horizontal	358	1.80	21	33.24	8.35	35.04			
AV	5.3246G	105.58	Inf	-Inf	99.01	3	Horizontal	358	1.80	21	33.25	8.36	35.04			
PK	5.357G	68.32	74.00	-5.68	61.66	3	Horizontal	358	1.80	21	33.31	8.38	35.03			
AV	5.35G	53.64	54.00	-0.36	46.99	3	Horizontal	358	1.80	21	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5290MHz_TX

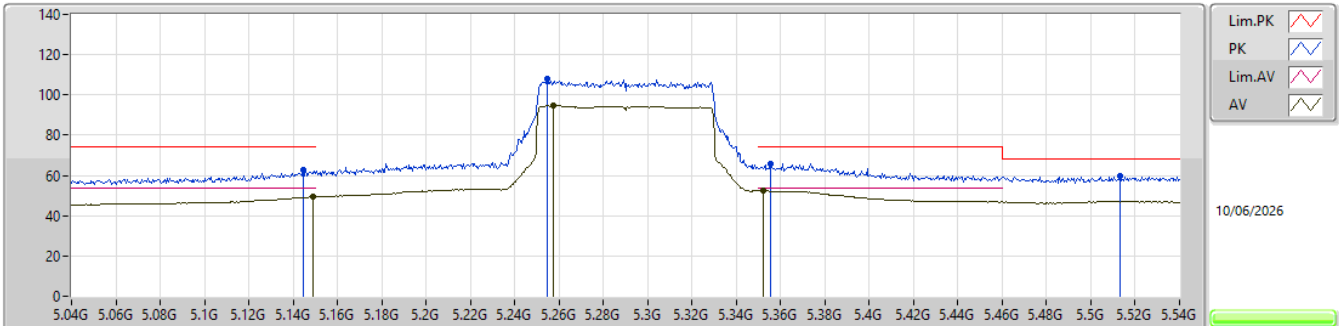


EUT_Y_4TX
SET 23.5
28\18\26.5\22.5\24.5\23.5\24\23.5
-28.41\8.72\28.31\5.01\7.34\1.37\1.71\1.53

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1445G	62.92	74.00	-11.08	57.85	3	Vertical	17	1.80	23.5	31.88	6.91	33.72				
AV	5.149G	49.36	54.00	-4.64	44.27	3	Vertical	17	1.80	23.5	31.90	6.91	33.72				
PK	5.2545G	108.07	Inf	-Inf	103.58	3	Vertical	17	1.80	23.5	31.29	6.95	33.75				
AV	5.2575G	94.60	Inf	-Inf	90.11	3	Vertical	17	1.80	23.5	31.29	6.95	33.75				
PK	5.3555G	66.01	74.00	-7.99	61.48	3	Vertical	17	1.80	23.5	31.31	6.99	33.77				
AV	5.352G	52.47	54.00	-1.53	47.95	3	Vertical	17	1.80	23.5	31.30	6.99	33.77				
PK	5.513G	59.57	68.20	-8.63	54.48	3	Vertical	17	1.80	23.5	31.70	7.20	33.81				

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

5290MHz_TX

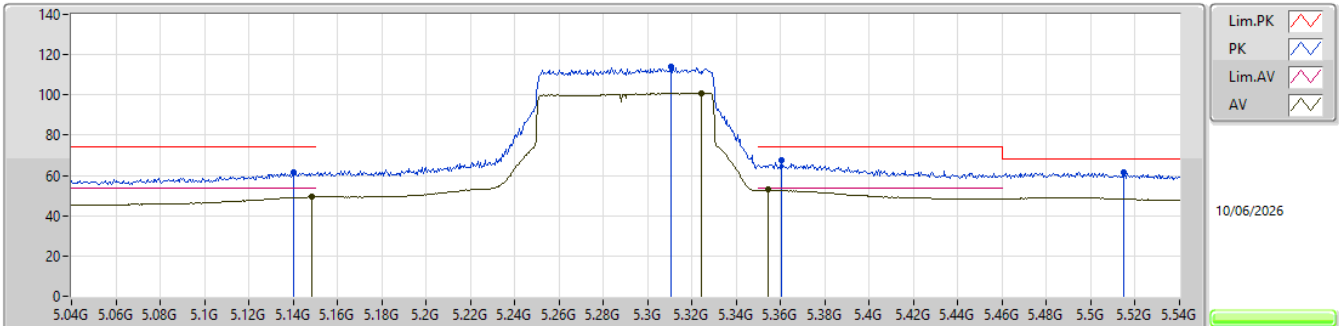


EUT_Y_4TX
SET 21.5
23.5\16.5\24\20.5\22\21.5
-6.96\7.64\11.19\3.34\0.56\1.19

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.14G	61.81	74.00	-12.19	56.77	3	Horizontal	24	1.80	21.5	31.86	6.90	33.72			
AV	5.1485G	49.37	54.00	-4.63	44.29	3	Horizontal	24	1.80	21.5	31.89	6.91	33.72			
PK	5.3105G	113.97	Inf	-Inf	109.54	3	Horizontal	24	1.80	21.5	31.22	6.97	33.76			
AV	5.3245G	100.90	Inf	-Inf	96.43	3	Horizontal	24	1.80	21.5	31.25	6.98	33.76			
PK	5.3605G	67.41	74.00	-6.59	62.87	3	Horizontal	24	1.80	21.5	31.32	6.99	33.77			
AV	5.3545G	52.81	54.00	-1.19	48.28	3	Horizontal	24	1.80	21.5	31.31	6.99	33.77			
PK	5.515G	61.69	68.20	-6.51	56.60	3	Horizontal	24	1.80	21.5	31.70	7.20	33.81			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.15-5.25GHz_TX

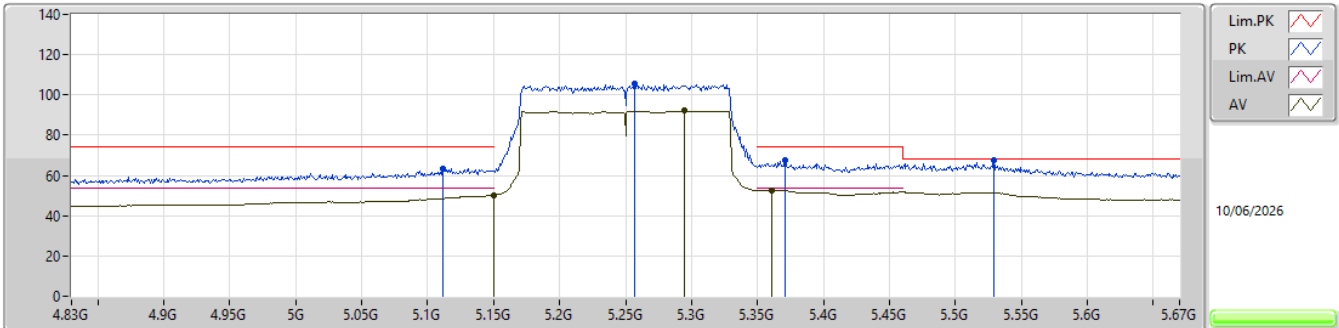


EUT_Y_1TX
SET 22
11.5\18\24\21\22.5\22
6.52\6.37\7.69\3.74\0.29\0.87

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.1114G	63.45	74.00	-10.55	57.54	3	Vertical	8	1.80	22	32.82	8.21	35.12			
AV	5.15G	50.16	54.00	-3.84	44.14	3	Vertical	8	1.80	22	32.90	8.23	35.11			
PK	5.25672G	105.43	Inf	-Inf	99.09	3	Vertical	8	1.80	22	33.11	8.30	35.07			
AV	5.29452G	92.04	Inf	-Inf	85.57	3	Vertical	8	1.80	22	33.19	8.33	35.05			
PK	5.37096G	67.45	74.00	-6.55	60.74	3	Vertical	8	1.80	22	33.34	8.40	35.03			
AV	5.36088G	52.59	54.00	-1.41	45.91	3	Vertical	8	1.80	22	33.32	8.39	35.03			
PK	5.52888G	67.33	68.20	-0.87	59.82	3	Vertical	8	1.80	22	33.96	8.52	34.97			

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.15-5.25GHz_TX

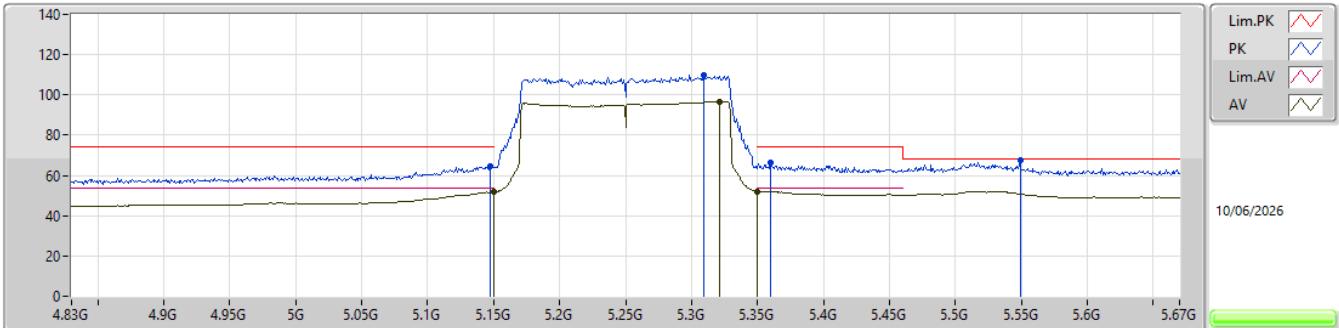


EUT_V_1TX
SET 17.5
22\14.5\18.5\16.5\17.5\18\17.5
-7.42\4.38\1.18\2.19\1.72\0.18\0.80

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.14752G	64.30	74.00	-9.70	58.28	3	Horizontal	5	1.80	17.5	32.90	8.23	35.11				
AV	5.15G	51.79	54.00	-2.21	45.77	3	Horizontal	5	1.80	17.5	32.90	8.23	35.11				
PK	5.30964G	109.74	Inf	-Inf	103.23	3	Horizontal	5	1.80	17.5	33.22	8.34	35.05				
AV	5.3214G	96.62	Inf	-Inf	90.07	3	Horizontal	5	1.80	17.5	33.24	8.35	35.04				
PK	5.36004G	66.22	74.00	-7.78	59.54	3	Horizontal	5	1.80	17.5	33.32	8.39	35.03				
AV	5.35G	51.88	54.00	-2.12	45.23	3	Horizontal	5	1.80	17.5	33.30	8.38	35.03				
PK	5.54904G	67.40	68.20	-0.80	59.83	3	Horizontal	5	1.80	17.5	34.00	8.53	34.96				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

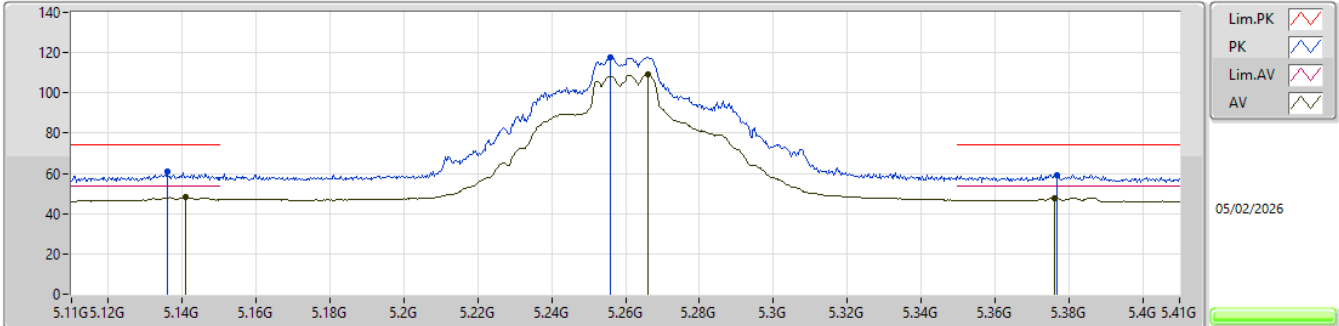


EUT_Y_2TX
SET 24.5
17\25\26\25.5\25\24.5
8.25\6.04\21.47\21.33\20.54\5.96

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1358G	60.84	74.00	-13.16	64.31	3	Vertical	9	1.80	24.5	32.01	8.38	43.86			
AV	5.1409G	48.04	54.00	-5.96	51.45	3	Vertical	9	1.80	24.5	32.05	8.39	43.85			
PK	5.2558G	117.60	Inf	-Inf	121.50	3	Vertical	9	1.80	24.5	31.48	8.44	43.82			
AV	5.266G	109.16	Inf	-Inf	113.09	3	Vertical	9	1.80	24.5	31.44	8.44	43.81			
PK	5.3767G	59.35	74.00	-14.65	63.25	3	Vertical	9	1.80	24.5	31.40	8.48	43.78			
AV	5.3761G	47.95	54.00	-6.05	51.85	3	Vertical	9	1.80	24.5	31.40	8.48	43.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5260MHz_TX

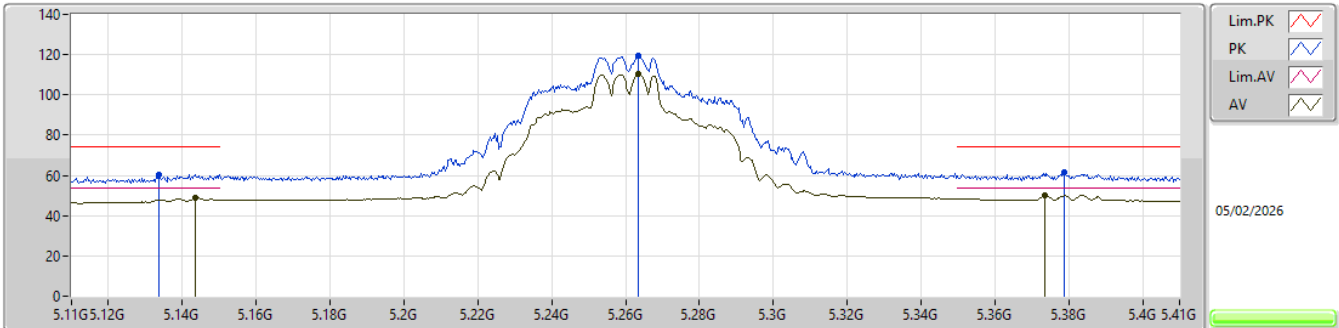


EUT_Y_2TX
SET 24.5
24.5
4.03

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1337G	60.32	74.00	-13.68	63.80	3	Horizontal	4	1.80	24.5	32.00	8.38	43.86				
AV	5.1436G	48.79	54.00	-5.21	52.19	3	Horizontal	4	1.80	24.5	32.06	8.39	43.85				
PK	5.2636G	119.31	Inf	-Inf	123.24	3	Horizontal	4	1.80	24.5	31.45	8.44	43.82				
AV	5.2636G	110.30	Inf	-Inf	114.23	3	Horizontal	4	1.80	24.5	31.45	8.44	43.82				
PK	5.3788G	61.29	74.00	-12.71	65.19	3	Horizontal	4	1.80	24.5	31.40	8.48	43.78				
AV	5.3734G	49.97	54.00	-4.03	53.87	3	Horizontal	4	1.80	24.5	31.40	8.48	43.78				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

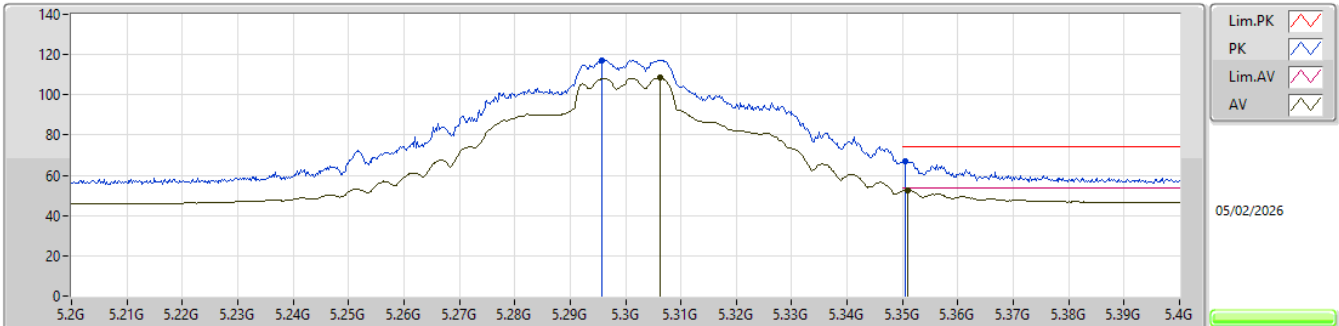


EUT_Y_2TX
SET 24.5
17\26\16\21\23.5\24.5\25\24.5
9.12\ -29.71\9.20\7.64\4.53\1.00\ -1.59\1.20

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2958G	117.27	Inf	-Inf	121.31	3	Vertical	8	1.79	24.5	31.32	8.45	43.81				
AV	5.3062G	108.49	Inf	-Inf	112.52	3	Vertical	8	1.79	24.5	31.31	8.46	43.80				
PK	5.3504G	67.26	74.00	-6.74	71.18	3	Vertical	8	1.79	24.5	31.40	8.47	43.79				
AV	5.351G	52.80	54.00	-1.20	56.72	3	Vertical	8	1.79	24.5	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

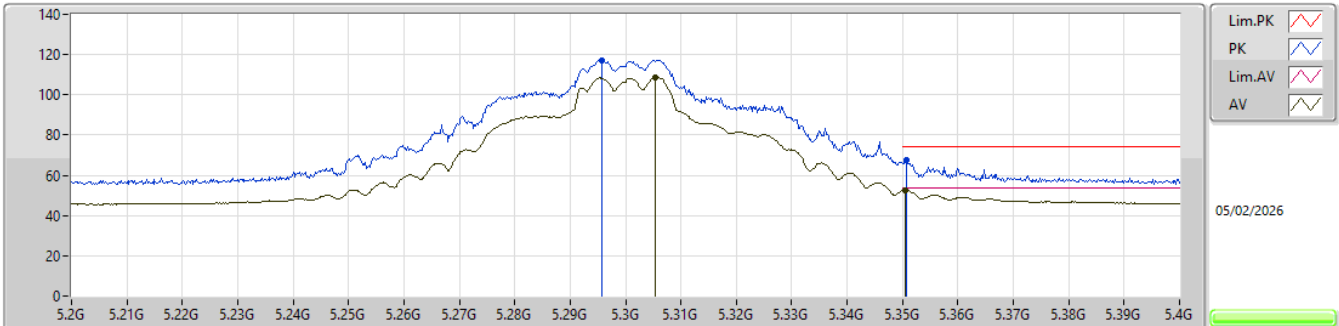


EUT_Y_2TX
SET 24.5
24.5
1.45

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.2958G	117.35	Inf	-Inf	121.39	3	Horizontal	11	2.11	24.5	31.32	8.45	43.81			
AV	5.3054G	108.64	Inf	-Inf	112.67	3	Horizontal	11	2.11	24.5	31.31	8.46	43.80			
PK	5.3508G	67.50	74.00	-6.50	71.42	3	Horizontal	11	2.11	24.5	31.40	8.47	43.79			
AV	5.3504G	52.55	54.00	-1.45	56.47	3	Horizontal	11	2.11	24.5	31.40	8.47	43.79			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

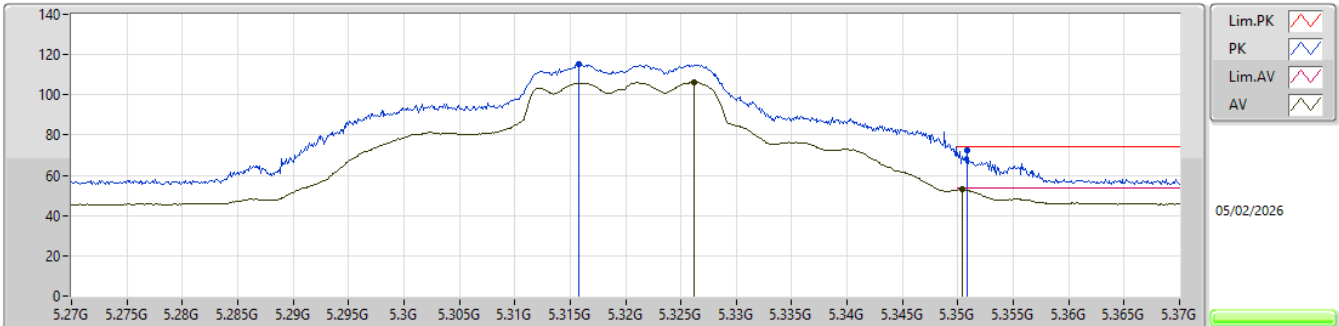


EUT Y_2TX
SET 19.5
17\24\16\20\18\19\19.5
7.32\18.03\7.93\1.87\5.39\2.99\1.02

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3158G	115.24	Inf	-Inf	119.25	3	Vertical	7	1.80	19.5	31.33	8.46	43.80				
AV	5.3262G	106.10	Inf	-Inf	110.09	3	Vertical	7	1.80	19.5	31.35	8.46	43.80				
PK	5.3508G	72.51	74.00	-1.49	76.43	3	Vertical	7	1.80	19.5	31.40	8.47	43.79				
AV	5.3504G	52.98	54.00	-1.02	56.90	3	Vertical	7	1.80	19.5	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5320MHz_TX

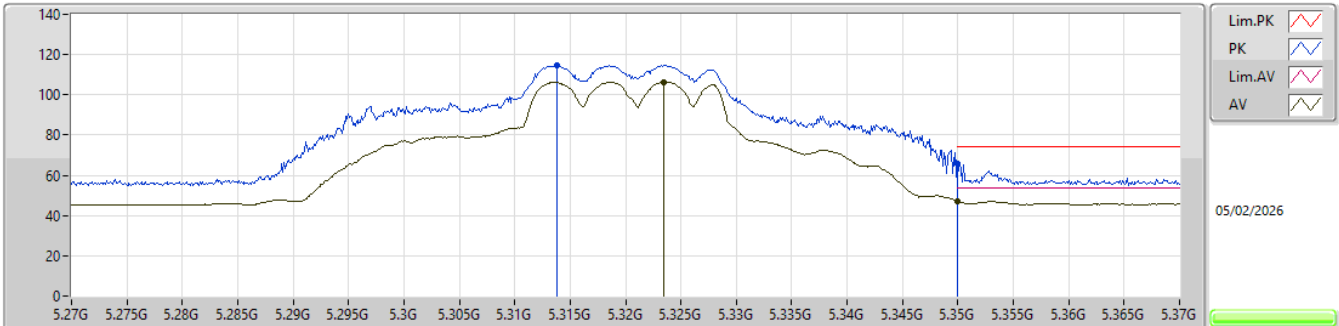


EUT Y_2TX
SET 16.5
19.5\9.5\19\14.5\16.5\17.5\17\16.5
-11.80\9.50\10.23\8.00\6.95\2.87\0.08\6.93

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3138G	114.71	Inf	-Inf	118.72	3	Horizontal	3	1.80	16.5	31.33	8.46	43.80				
AV	5.3235G	106.25	Inf	-Inf	110.24	3	Horizontal	3	1.80	16.5	31.35	8.46	43.80				
PK	5.35G	65.72	74.00	-8.28	69.64	3	Horizontal	3	1.80	16.5	31.40	8.47	43.79				
AV	5.35G	47.07	54.00	-6.93	50.99	3	Horizontal	3	1.80	16.5	31.40	8.47	43.79				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

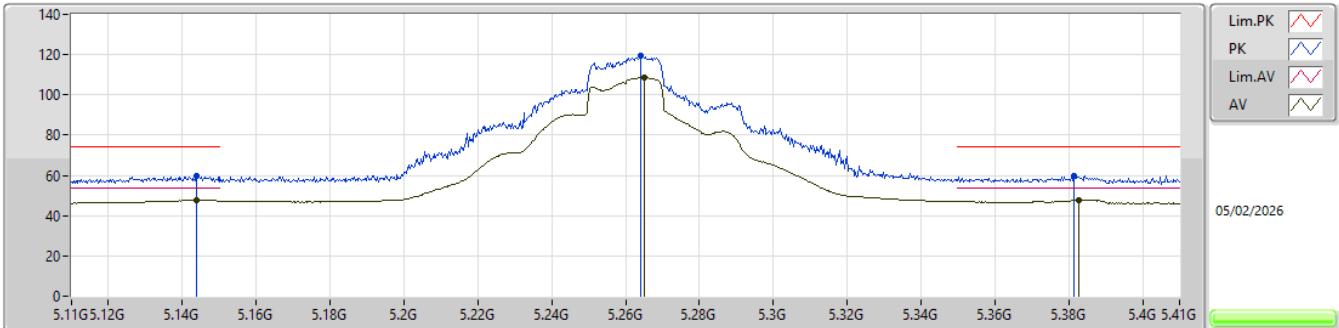


EUT Y_2TX
SET 24.5
17\25\26\25.5\25\24.5
8.03\6.16\22.27\22.27\21.73\6.21

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1439G	59.59	74.00	-14.41	62.99	3	Vertical	8	1.80	24.5	32.06	8.39	43.85				
AV	5.1439G	47.77	54.00	-6.23	51.17	3	Vertical	8	1.80	24.5	32.06	8.39	43.85				
PK	5.2642G	119.32	Inf	-Inf	123.26	3	Vertical	8	1.80	24.5	31.44	8.44	43.82				
AV	5.2651G	108.49	Inf	-Inf	112.43	3	Vertical	8	1.80	24.5	31.44	8.44	43.82				
PK	5.3815G	59.72	74.00	-14.28	63.62	3	Vertical	8	1.80	24.5	31.40	8.48	43.78				
AV	5.3827G	47.79	54.00	-6.21	51.69	3	Vertical	8	1.80	24.5	31.40	8.48	43.78				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

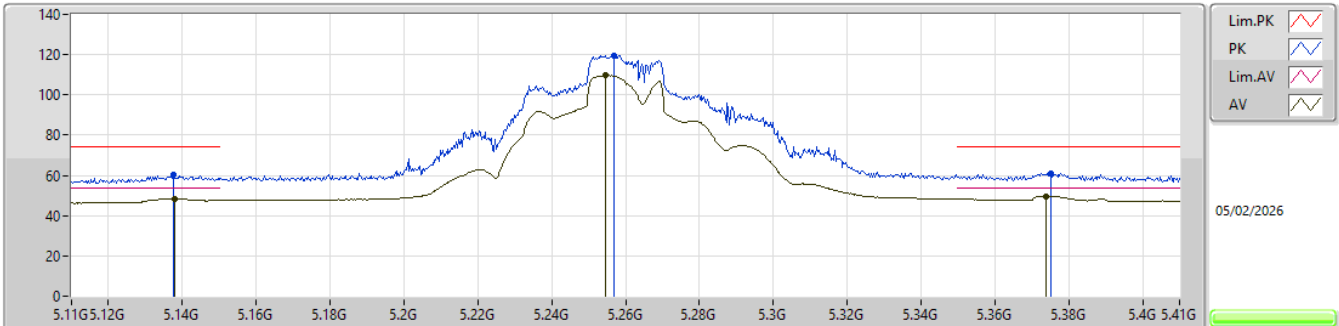


EUT Y_2TX
SET 24.5
24.5
4.25

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1376G	60.44	74.00	-13.56	63.88	3	Horizontal	360	1.80	24.5	32.03	8.39	43.86				
AV	5.1379G	48.45	54.00	-5.55	51.89	3	Horizontal	360	1.80	24.5	32.03	8.39	43.86				
PK	5.257G	119.77	Inf	-Inf	123.68	3	Horizontal	360	1.80	24.5	31.47	8.44	43.82				
AV	5.2546G	109.71	Inf	-Inf	113.61	3	Horizontal	360	1.80	24.5	31.48	8.44	43.82				
PK	5.3752G	60.90	74.00	-13.10	64.80	3	Horizontal	360	1.80	24.5	31.40	8.48	43.78				
AV	5.3737G	49.75	54.00	-4.25	53.65	3	Horizontal	360	1.80	24.5	31.40	8.48	43.78				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

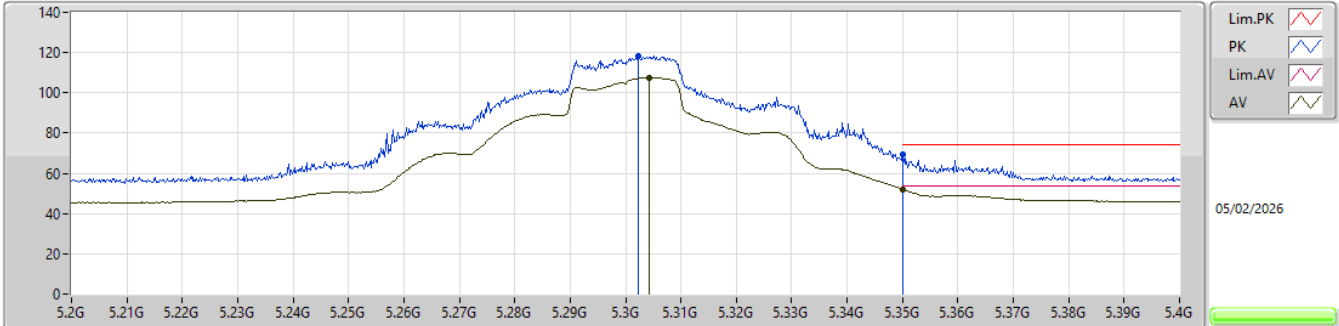


EUT_V_2TX
SET 23.5
17.25.5\16\20.5\22.5\23.5\24\23.5
8.73\ -12.66\8.92\7.69\5.46\1.50\ -0.30\1.85

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3024G	118.15	Inf	-Inf	122.19	3	Vertical	8	1.80	23.5	31.30	8.46	43.80				
AV	5.3042G	107.49	Inf	-Inf	111.52	3	Vertical	8	1.80	23.5	31.31	8.46	43.80				
PK	5.35G	69.55	74.00	-4.45	73.47	3	Vertical	8	1.80	23.5	31.40	8.47	43.79				
AV	5.35G	52.15	54.00	-1.85	56.07	3	Vertical	8	1.80	23.5	31.40	8.47	43.79				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5300MHz_TX

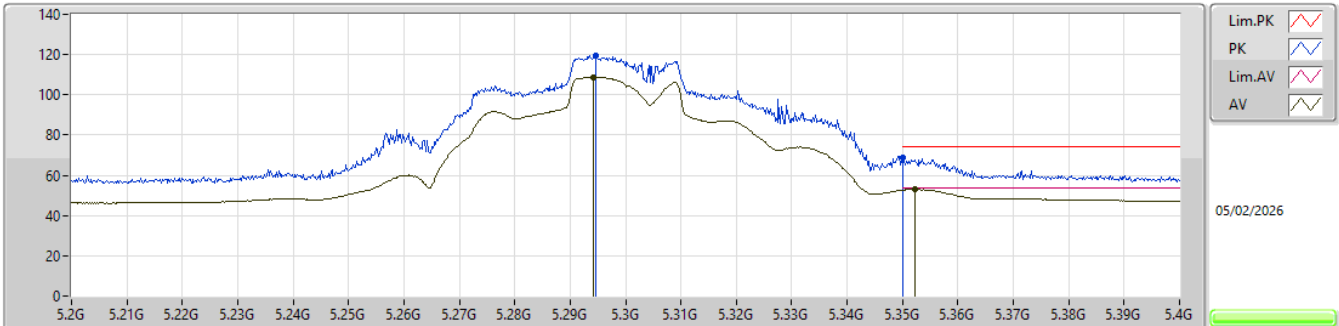


EUT_Y_2TX
SET 23
23.5\21.5\23
-1.62\4.46\0.86

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2946G	119.48	Inf	-Inf	123.52	3	Horizontal	2	1.79	23	31.32	8.45	43.81			
AV	5.2942G	108.78	Inf	-Inf	112.82	3	Horizontal	2	1.79	23	31.32	8.45	43.81			
PK	5.35G	69.08	74.00	-4.92	73.00	3	Horizontal	2	1.79	23	31.40	8.47	43.79			
AV	5.3522G	53.14	54.00	-0.86	57.06	3	Horizontal	2	1.79	23	31.40	8.47	43.79			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

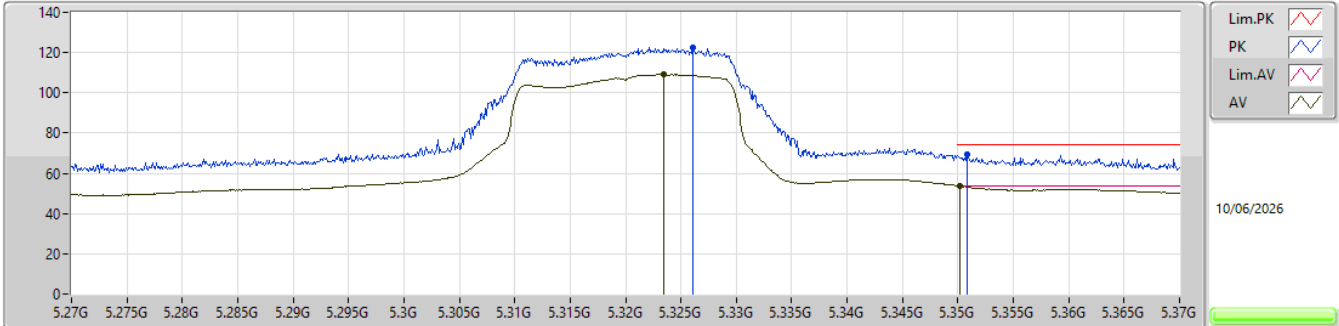


EUT Y_2TX
SET 22
17.5\22
4.78\0.31

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3261G	122.42	Inf	-Inf	115.85	3	Vertical	347	1.80	22	33.25	8.36	35.04			
AV	5.3235G	109.05	Inf	-Inf	102.49	3	Vertical	347	1.80	22	33.25	8.35	35.04			
PK	5.3508G	69.57	74.00	-4.43	62.92	3	Vertical	347	1.80	22	33.30	8.38	35.03			
AV	5.3502G	53.69	54.00	-0.31	47.04	3	Vertical	347	1.80	22	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5320MHz_TX

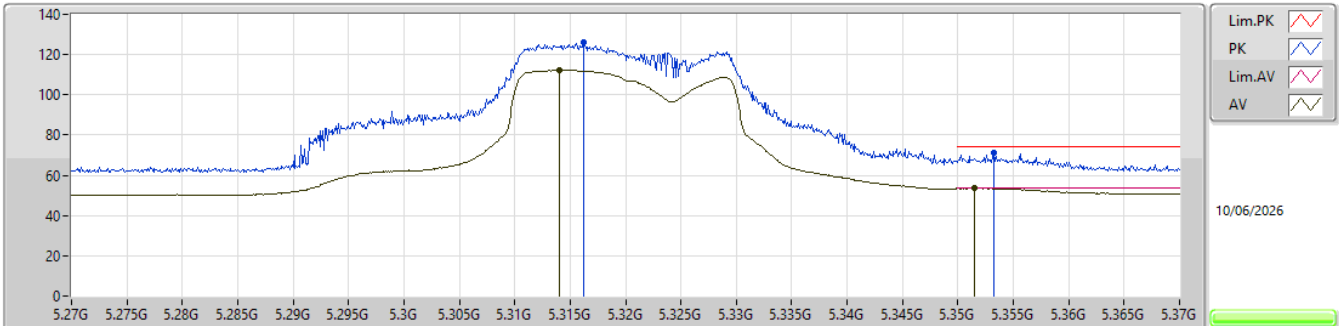


EUT_V_2TX
SET 20.5
22\19\20.5
-2.80\2.05\0.31

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3162G	125.92	Inf	-Inf	119.39	3	Horizontal	345	1.80	20.5	33.23	8.35	35.05				
AV	5.314G	112.20	Inf	-Inf	105.67	3	Horizontal	345	1.80	20.5	33.23	8.35	35.05				
PK	5.3532G	71.15	74.00	-2.85	64.49	3	Horizontal	345	1.80	20.5	33.31	8.38	35.03				
AV	5.3515G	53.69	54.00	-0.31	47.04	3	Horizontal	345	1.80	20.5	33.30	8.38	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

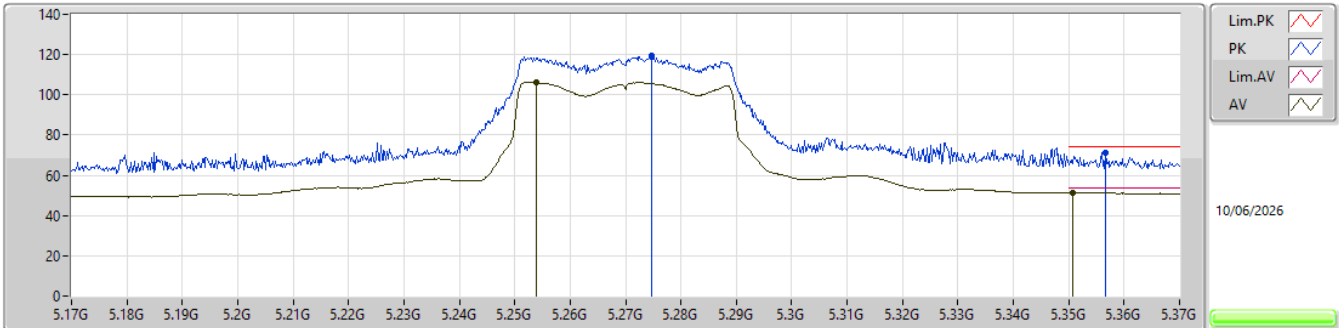


EUT Y_2TX
SET 23
22\26\21\23.5\22.5\23
4.44\ -28.29\4.46\ -1.76\3.99\2.75

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2748G	119.58	Inf	-Inf	113.18	3	Vertical	344	1.80	23	33.15	8.31	35.06			
AV	5.2538G	106.12	Inf	-Inf	99.78	3	Vertical	344	1.80	23	33.11	8.30	35.07			
PK	5.3566G	71.20	74.00	-2.80	64.54	3	Vertical	344	1.80	23	33.31	8.38	35.03			
AV	5.3508G	51.25	54.00	-2.75	44.60	3	Vertical	344	1.80	23	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5270MHz_TX

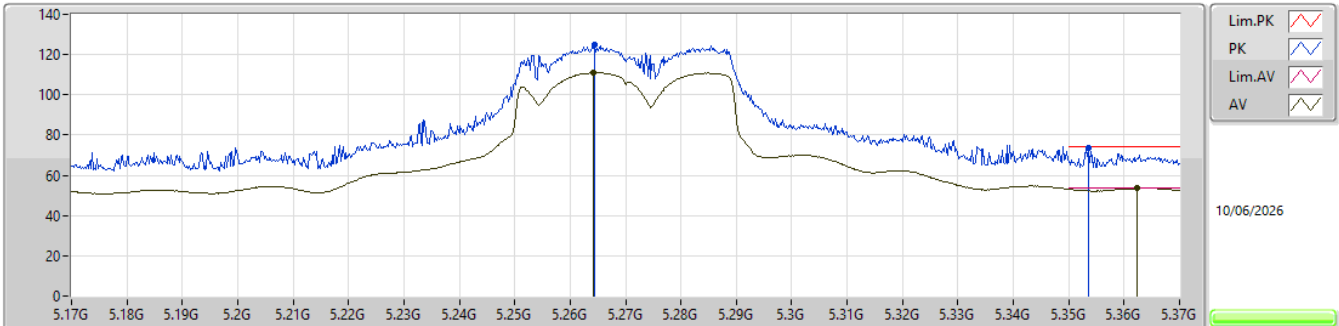


EUT Y_2TX
SET 23
23\23.5\23
0.63\ -2.89\0.25

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2644G	124.97	Inf	-Inf	118.60	3	Horizontal	346	1.80	23	33.13	8.30	35.06				
AV	5.2642G	110.94	Inf	-Inf	104.57	3	Horizontal	346	1.80	23	33.13	8.30	35.06				
PK	5.3536G	73.75	74.00	-0.25	67.09	3	Horizontal	346	1.80	23	33.31	8.38	35.03				
AV	5.3624G	53.68	54.00	-0.32	47.00	3	Horizontal	346	1.80	23	33.32	8.39	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

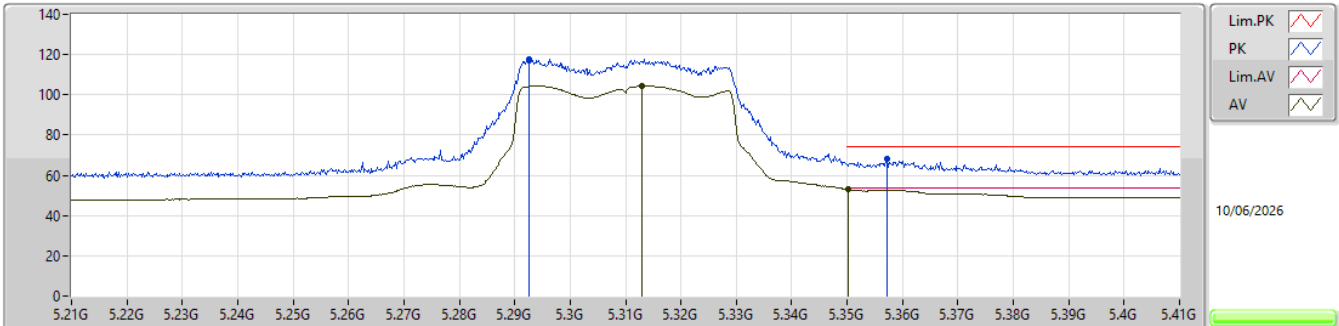


EUT Y_2TX
SET 20.5
8.5\16\20.5\22.5\21.5\21\20.5
7.51\4.96\1.14\3.18\0.70\0.42\0.87

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2926G	117.85	Inf	-Inf	111.38	3	Vertical	346	1.80	20.5	33.19	8.33	35.05				
AV	5.313G	104.42	Inf	-Inf	97.89	3	Vertical	346	1.80	20.5	33.23	8.35	35.05				
PK	5.3572G	68.31	74.00	-5.69	61.65	3	Vertical	346	1.80	20.5	33.31	8.38	35.03				
AV	5.3502G	53.13	54.00	-0.87	46.48	3	Vertical	346	1.80	20.5	33.30	8.38	35.03				

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

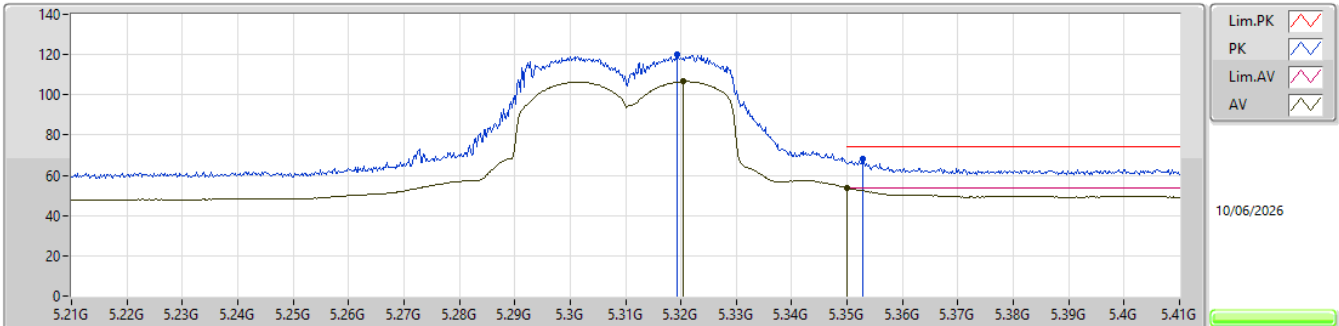


EUT_Y_2TX
SET 17.5
20.5\14.5\19\17\18\17.5
-5.82\4.96\2.04\1.31\0.93\0.26

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3194G	120.20	Inf	-Inf	113.66	3	Horizontal	9	1.80	17.5	33.24	8.35	35.05			
AV	5.3204G	106.57	Inf	-Inf	100.02	3	Horizontal	9	1.80	17.5	33.24	8.35	35.04			
PK	5.3528G	68.35	74.00	-5.65	61.69	3	Horizontal	9	1.80	17.5	33.31	8.38	35.03			
AV	5.35G	53.74	54.00	-0.26	47.09	3	Horizontal	9	1.80	17.5	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

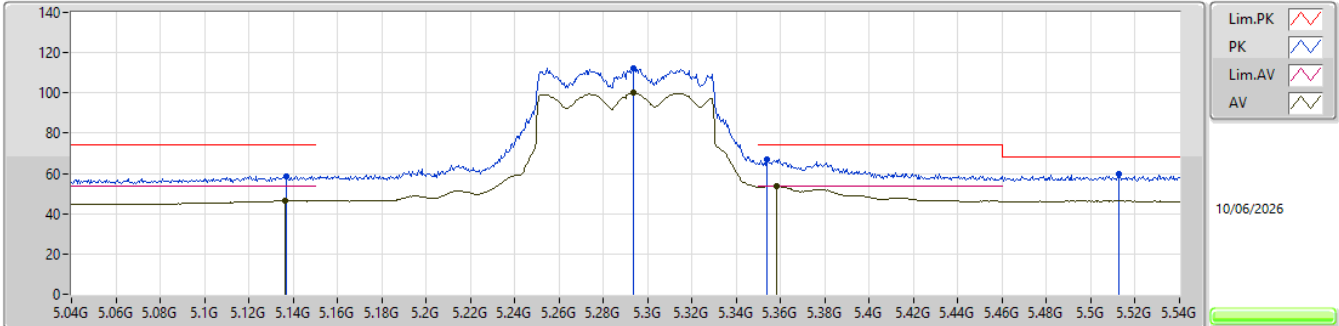


EUT_V_2TX
SET 20.5
17\19.5\20.5\21\20.5
2.80\2.95\0.91\1.87\0.11

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.137G	58.80	74.00	-15.20	53.77	3	Vertical	357	1.74	20.5	31.85	6.90	33.72				
AV	5.1365G	46.49	54.00	-7.51	41.46	3	Vertical	357	1.74	20.5	31.85	6.90	33.72				
PK	5.2935G	112.08	Inf	-Inf	107.66	3	Vertical	357	1.74	20.5	31.21	6.97	33.76				
AV	5.2935G	99.93	Inf	-Inf	95.51	3	Vertical	357	1.74	20.5	31.21	6.97	33.76				
PK	5.354G	66.94	74.00	-7.06	62.41	3	Vertical	357	1.74	20.5	31.31	6.99	33.77				
AV	5.358G	53.89	54.00	-0.11	49.35	3	Vertical	357	1.74	20.5	31.32	6.99	33.77				
PK	5.5125G	59.97	68.20	-8.23	54.88	3	Vertical	357	1.74	20.5	31.70	7.20	33.81				

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

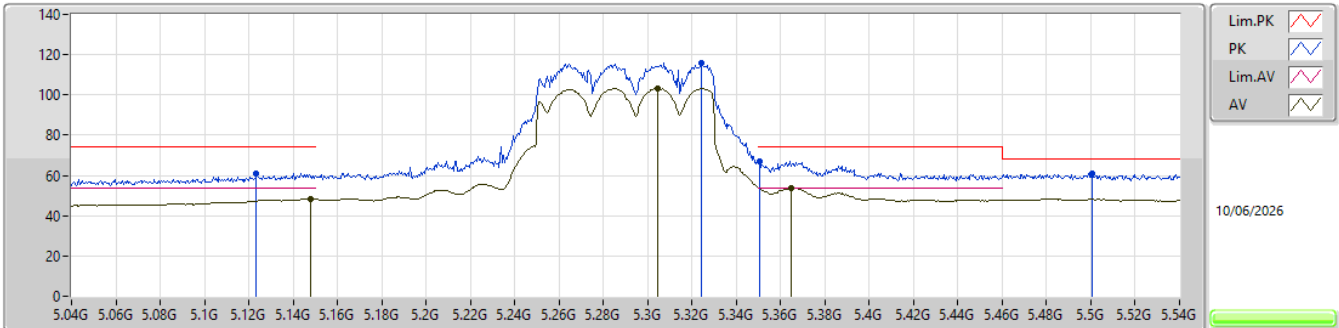


EUT_V_2TX
SET 19.5
20.5\17.5\21.5\19.5
-2.57\4.39\ -5.72\0.26

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1235G	60.99	74.00	-13.01	56.01	3	Horizontal	351	1.80	19.5	31.79	6.90	33.71				
AV	5.148G	48.29	54.00	-5.71	43.21	3	Horizontal	351	1.80	19.5	31.89	6.91	33.72				
PK	5.3245G	115.89	Inf	-Inf	111.42	3	Horizontal	351	1.80	19.5	31.25	6.98	33.76				
AV	5.3045G	103.25	Inf	-Inf	98.83	3	Horizontal	351	1.80	19.5	31.21	6.97	33.76				
PK	5.3505G	66.88	74.00	-7.12	62.36	3	Horizontal	351	1.80	19.5	31.30	6.99	33.77				
AV	5.365G	53.74	54.00	-0.26	49.18	3	Horizontal	351	1.80	19.5	31.33	7.00	33.77				
PK	5.5005G	61.24	68.20	-6.96	56.17	3	Horizontal	351	1.80	19.5	31.70	7.18	33.81				

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

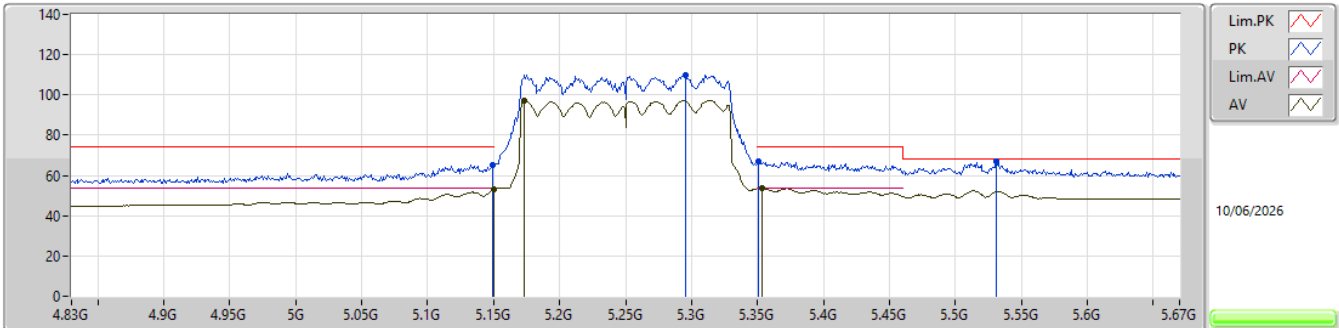


EUT_V_2TX
SET 18.5
8.5\15\18\19.5\19\18.5
6.57\3.94\0.88\1.60\0.26\0.16

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1492G	65.22	74.00	-8.78	59.20	3	Vertical	354	1.80	18.5	32.90	8.23	35.11				
AV	5.15G	52.95	54.00	-1.05	46.93	3	Vertical	354	1.80	18.5	32.90	8.23	35.11				
AV	5.17272G	97.16	Inf	-Inf	91.12	3	Vertical	354	1.80	18.5	32.90	8.24	35.10				
PK	5.29536G	110.00	Inf	-Inf	103.53	3	Vertical	354	1.80	18.5	33.19	8.33	35.05				
PK	5.3508G	67.04	74.00	-6.96	60.39	3	Vertical	354	1.80	18.5	33.30	8.38	35.03				
AV	5.35332G	53.84	54.00	-0.16	47.18	3	Vertical	354	1.80	18.5	33.31	8.38	35.03				
PK	5.5314G	66.90	68.20	-1.30	59.38	3	Vertical	354	1.80	18.5	33.96	8.52	34.96				

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.15-5.25GHz_TX

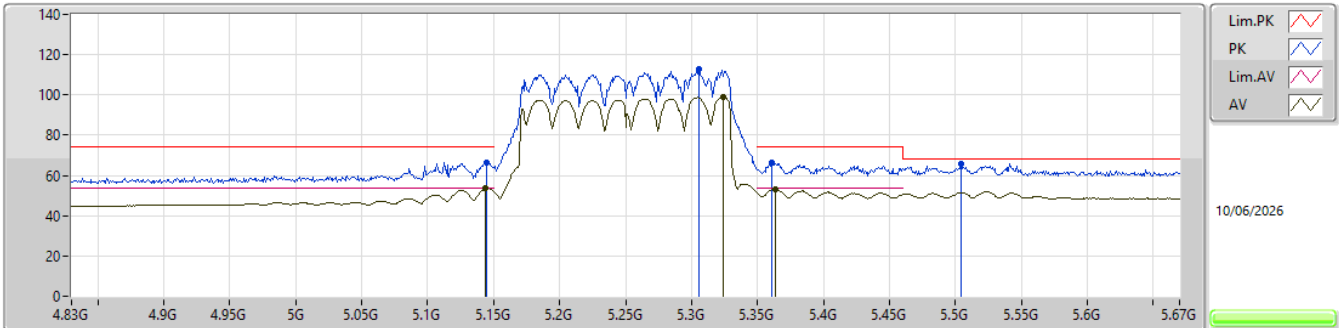


EUT_V_2TX
SET 15.5
18.5\14.5\16.5\15.5
-3.82\1.74\0.21\0.26

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA					
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)					
PK	5.145G	66.41	74.00	-7.59	60.40	3	Horizontal	354	1.80	15.5	32.89	8.23	35.11					
AV	5.14416G	53.74	54.00	-0.26	47.73	3	Horizontal	354	1.80	15.5	32.89	8.23	35.11					
PK	5.30544G	112.56	Inf	-Inf	106.06	3	Horizontal	354	1.80	15.5	33.21	8.34	35.05					
AV	5.32392G	99.00	Inf	-Inf	92.43	3	Horizontal	354	1.80	15.5	33.25	8.36	35.04					
PK	5.36088G	66.43	74.00	-7.57	59.75	3	Horizontal	354	1.80	15.5	33.32	8.39	35.03					
AV	5.3634G	53.30	54.00	-0.70	46.61	3	Horizontal	354	1.80	15.5	33.33	8.39	35.03					
PK	5.50452G	65.63	68.20	-2.57	58.20	3	Horizontal	354	1.80	15.5	33.91	8.50	34.98					

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

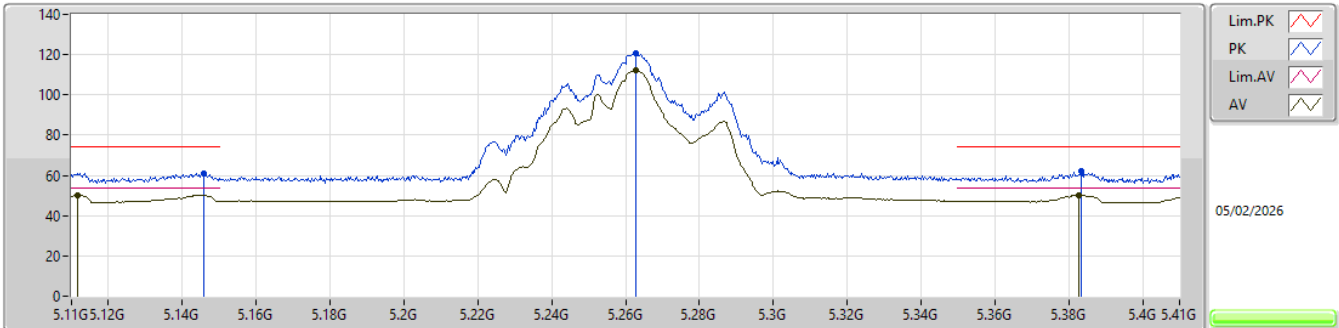


EUT_Y_4TX
SET 23
17\23\26\24.5\24\21\22.5\23
6.45\3.88\22.25\15.21\14.73\4.48\3.91\3.87

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	5.1457G	61.20	74.00	-12.80	64.59	3	Vertical	10	1.80	23	32.07	8.39	43.85
AV	5.1118G	50.13	54.00	-3.87	53.75	3	Vertical	10	1.80	23	31.87	8.37	43.86
PK	5.2627G	120.46	Inf	-Inf	124.39	3	Vertical	10	1.80	23	31.45	8.44	43.82
AV	5.2627G	112.14	Inf	-Inf	116.07	3	Vertical	10	1.80	23	31.45	8.44	43.82
PK	5.3833G	61.87	74.00	-12.13	65.77	3	Vertical	10	1.80	23	31.40	8.48	43.78
AV	5.3827G	50.10	54.00	-3.90	54.00	3	Vertical	10	1.80	23	31.40	8.48	43.78

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5260MHz_TX

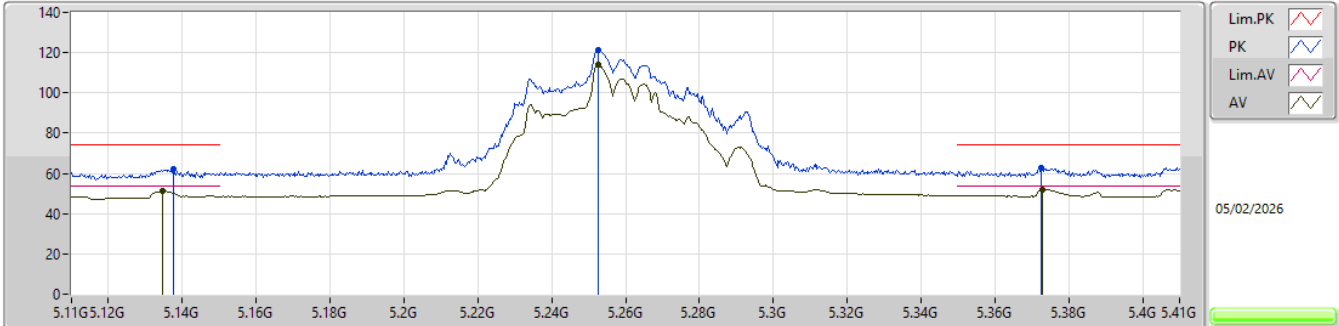


EUT_Y_4TX
SET 23
23
1.82

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.1376G	61.96	74.00	-12.04	65.40	3	Horizontal	19	1.97	23	32.03	8.39	43.86			
AV	5.1346G	51.05	54.00	-2.95	54.52	3	Horizontal	19	1.97	23	32.01	8.38	43.86			
PK	5.2525G	121.39	Inf	-Inf	125.28	3	Horizontal	19	1.97	23	31.49	8.44	43.82			
AV	5.2525G	114.10	Inf	-Inf	117.99	3	Horizontal	19	1.97	23	31.49	8.44	43.82			
PK	5.3725G	62.90	74.00	-11.10	66.80	3	Horizontal	19	1.97	23	31.40	8.48	43.78			
AV	5.3728G	52.18	54.00	-1.82	56.08	3	Horizontal	19	1.97	23	31.40	8.48	43.78			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

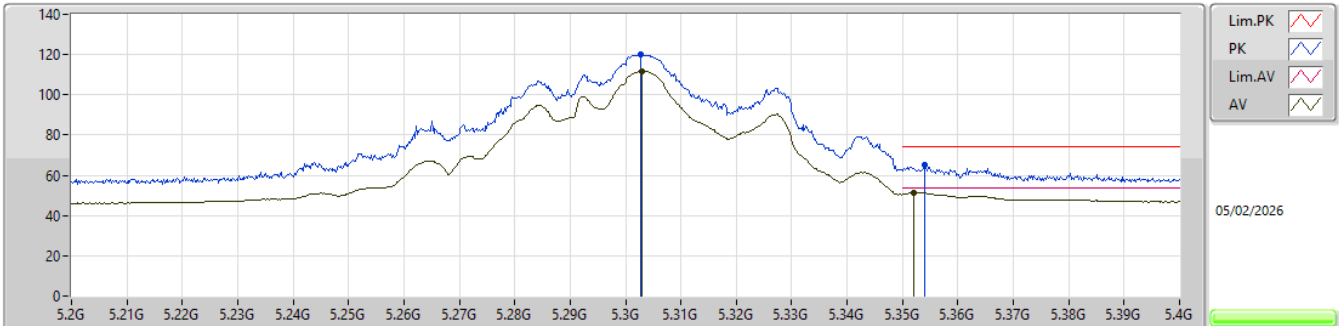


EUT_Y_4TX
SET 24
17\25.5\16\20.5\22.5\23.5\24\24.5\24
8.56\ -20.42\8.68\7.24\5.91\4.29\2.84\ -5.56\2.65

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3028G	120.09	Inf	-Inf	124.12	3	Vertical	13	1.80	24	31.31	8.46	43.80				
AV	5.303G	111.79	Inf	-Inf	115.82	3	Vertical	13	1.80	24	31.31	8.46	43.80				
PK	5.354G	65.21	74.00	-8.79	69.13	3	Vertical	13	1.80	24	31.40	8.47	43.79				
AV	5.352G	51.35	54.00	-2.65	55.27	3	Vertical	13	1.80	24	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5300MHz_TX

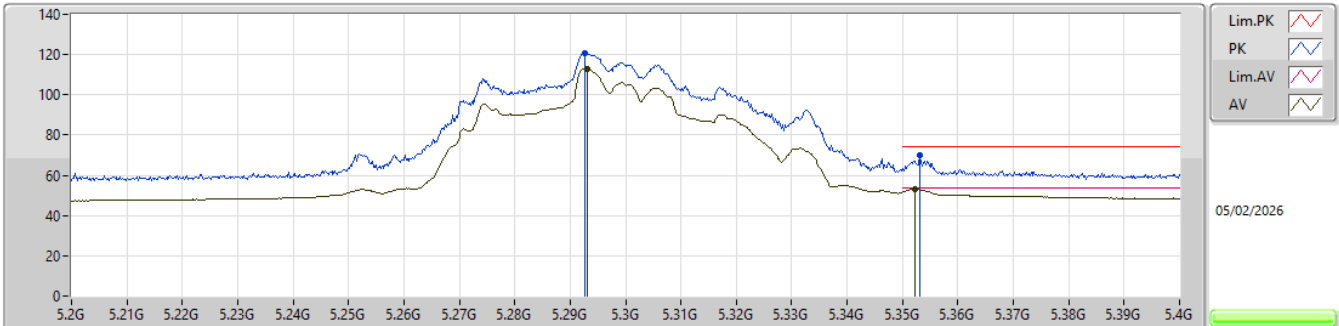


EUT_Y_4TX
SET 22.5
24\20\23.5\22\22.5\23\22.5
-3.61\4.63\2.43\1.98\0.79\0.59\0.73

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.2926G	120.77	Inf	-Inf	124.80	3	Horizontal	8	1.80	22.5	31.33	8.45	43.81			
AV	5.293G	113.13	Inf	-Inf	117.16	3	Horizontal	8	1.80	22.5	31.33	8.45	43.81			
PK	5.3532G	69.85	74.00	-4.15	73.77	3	Horizontal	8	1.80	22.5	31.40	8.47	43.79			
AV	5.3522G	53.27	54.00	-0.73	57.19	3	Horizontal	8	1.80	22.5	31.40	8.47	43.79			

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

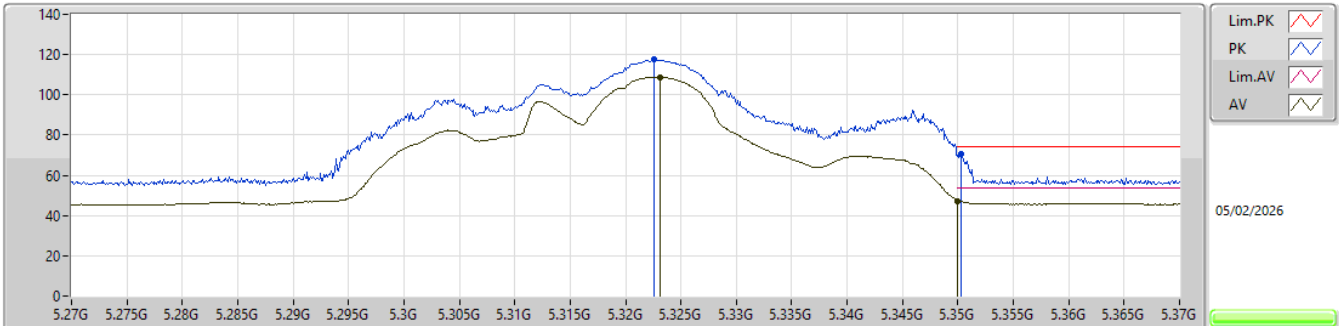


EUT_Y_4TX
SET 17
17\19\16\17.5\17
2.17\4.47\6.60\2.38\3.31

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3226G	117.68	Inf	-Inf	121.67	3	Vertical	11	1.80	17	31.35	8.46	43.80				
AV	5.3231G	108.77	Inf	-Inf	112.76	3	Vertical	11	1.80	17	31.35	8.46	43.80				
PK	5.3503G	70.69	74.00	-3.31	74.61	3	Vertical	11	1.80	17	31.40	8.47	43.79				
AV	5.35G	47.00	54.00	-7.00	50.92	3	Vertical	11	1.80	17	31.40	8.47	43.79				

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

5320MHz_TX

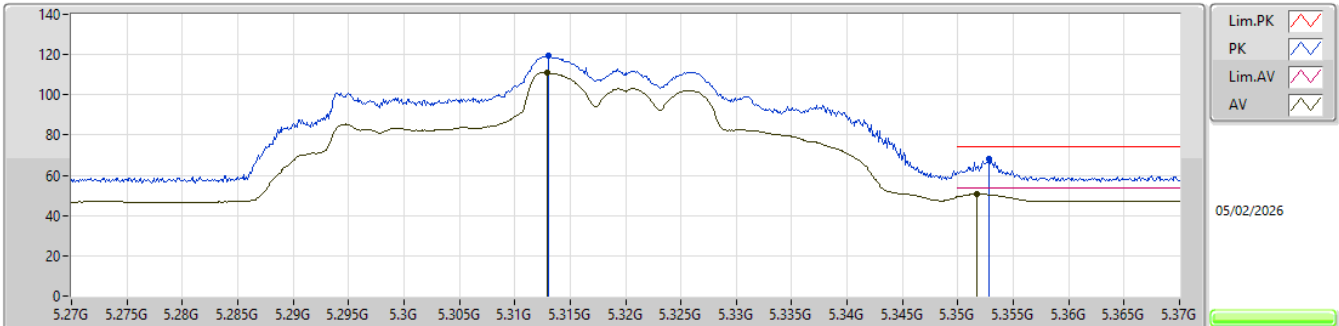


EUT Y_4TX
SET 17
17
3.08

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	5.313G	119.50	Inf	-Inf	123.51	3	Horizontal	15	1.80	17	31.33	8.46	43.80			
AV	5.3129G	111.03	Inf	-Inf	115.04	3	Horizontal	15	1.80	17	31.33	8.46	43.80			
PK	5.3528G	68.02	74.00	-5.98	71.94	3	Horizontal	15	1.80	17	31.40	8.47	43.79			
AV	5.3517G	50.92	54.00	-3.08	54.84	3	Horizontal	15	1.80	17	31.40	8.47	43.79			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

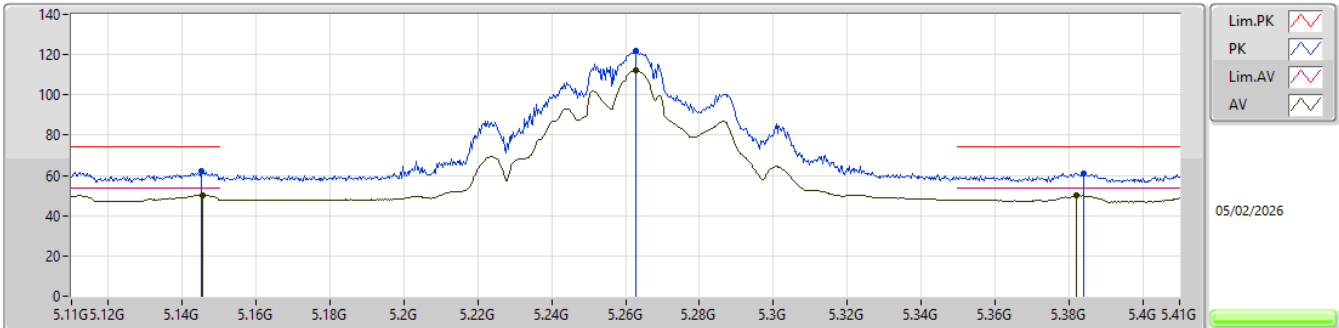


EUT_Y_4TX
SET 23.5
17\23.5\26\25\24.5\21.5\23\23.5
6.69\4.13\22.74\21.98\15.77\4.50\4.20\3.79

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.1451G	61.86	74.00	-12.14	65.25	3	Vertical	11	1.80	23.5	32.07	8.39	43.85				
AV	5.1454G	50.21	54.00	-3.79	53.60	3	Vertical	11	1.80	23.5	32.07	8.39	43.85				
PK	5.2627G	121.63	Inf	-Inf	125.56	3	Vertical	11	1.80	23.5	31.45	8.44	43.82				
AV	5.2627G	112.07	Inf	-Inf	116.00	3	Vertical	11	1.80	23.5	31.45	8.44	43.82				
PK	5.3839G	61.20	74.00	-12.80	65.10	3	Vertical	11	1.80	23.5	31.40	8.48	43.78				
AV	5.3821G	49.86	54.00	-4.14	53.76	3	Vertical	11	1.80	23.5	31.40	8.48	43.78				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

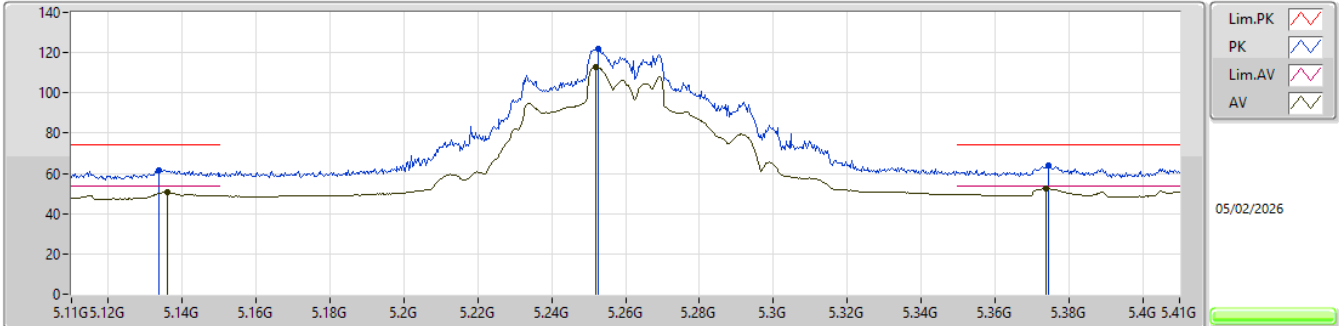


EUT Y_4TX
SET 23.5
23.5
1.65

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	5.1337G	61.63	74.00	-12.37	65.11	3	Horizontal	2	1.80	23.5	32.00	8.38	43.86				
AV	5.1358G	50.65	54.00	-3.35	54.12	3	Horizontal	2	1.80	23.5	32.01	8.38	43.86				
PK	5.2525G	121.83	Inf	-Inf	125.72	3	Horizontal	2	1.80	23.5	31.49	8.44	43.82				
AV	5.2519G	112.58	Inf	-Inf	116.47	3	Horizontal	2	1.80	23.5	31.49	8.44	43.82				
PK	5.3746G	63.81	74.00	-10.19	67.71	3	Horizontal	2	1.80	23.5	31.40	8.48	43.78				
AV	5.374G	52.35	54.00	-1.65	56.25	3	Horizontal	2	1.80	23.5	31.40	8.48	43.78				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

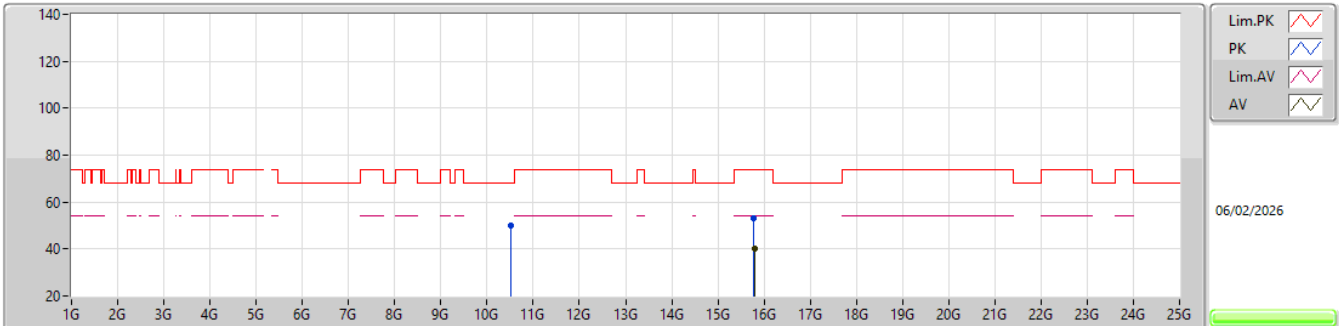


EUT_Y_4TX
SET 23.5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.5156G	50.01	68.20	-18.19	42.96	3	Vertical	56	1.80	23.5	38.83	11.80	43.58			
PK	15.78164G	53.32	74.00	-20.68	43.97	3	Vertical	116	2.06	23.5	37.97	14.54	43.16			
AV	15.78871G	40.24	54.00	-13.76	30.90	3	Vertical	116	2.06	23.5	37.95	14.55	43.16			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5260MHz_TX

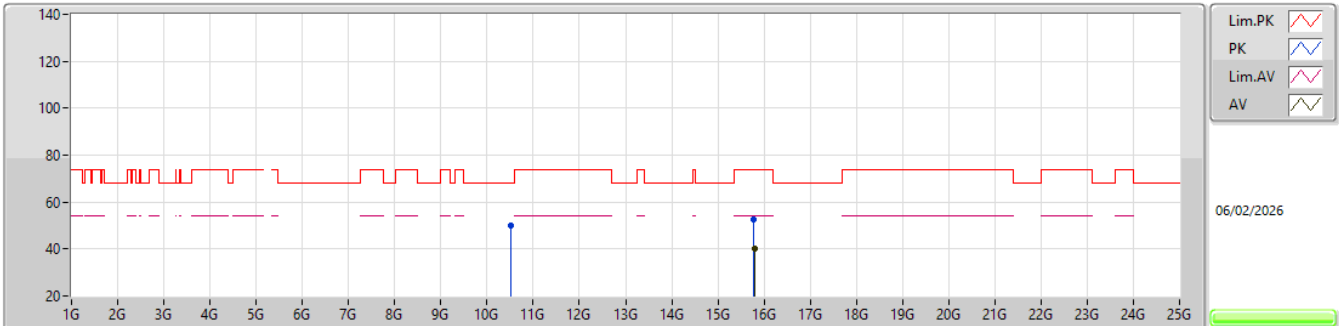


EUT_Y_4TX
SET 23.5

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.52544G	49.96	68.20	-18.24	42.88	3	Horizontal	326	1.80	23.5	38.85	11.81	43.58			
PK	15.77517G	52.67	74.00	-21.33	43.29	3	Horizontal	284	2.23	23.5	38.00	14.54	43.16			
AV	15.79818G	40.16	54.00	-13.84	30.87	3	Horizontal	284	2.23	23.5	37.91	14.55	43.17			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

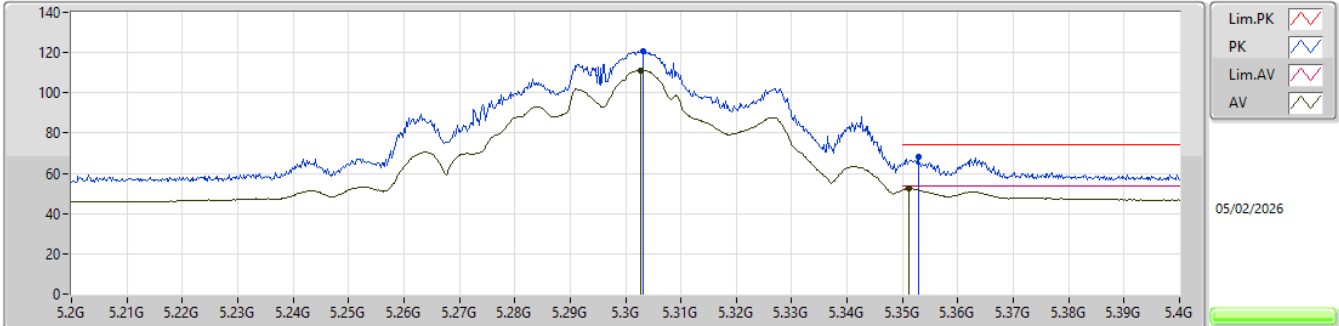


EUT_Y_4TX
SET 23
17\25\16\20.5\22.5\23.5\23
8.45\ -21.36\8.62\6.82\3.44\ -0.31\1.64

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.3032G	120.58	Inf	-Inf	124.61	3	Vertical	10	1.80	23	31.31	8.46	43.80				
AV	5.3028G	111.20	Inf	-Inf	115.23	3	Vertical	10	1.80	23	31.31	8.46	43.80				
PK	5.3528G	68.26	74.00	-5.74	72.18	3	Vertical	10	1.80	23	31.40	8.47	43.79				
AV	5.3512G	52.36	54.00	-1.64	56.28	3	Vertical	10	1.80	23	31.40	8.47	43.79				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

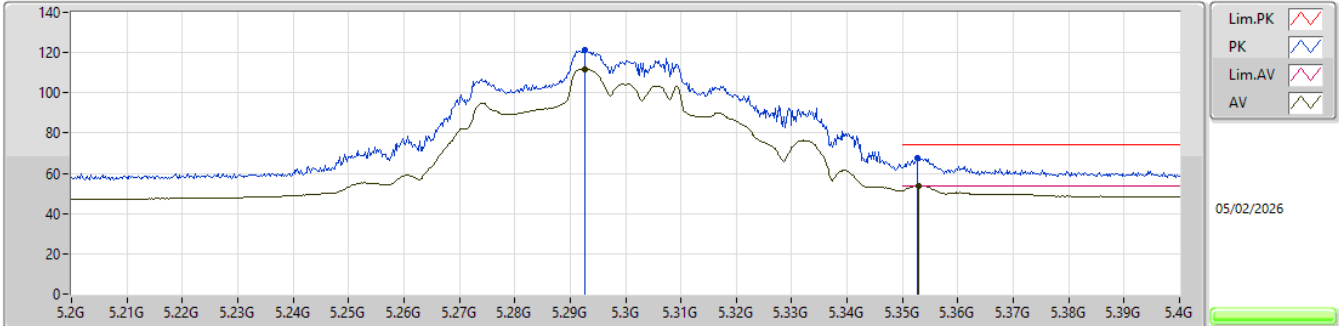


EUT_Y_4TX
SET 22
23\18.5\22.5\20.5\21.5\22
-4.16\5.09\1.99\3.26\1.56\0.06

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA				
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)				
PK	5.2926G	121.18	Inf	-Inf	125.21	3	Horizontal	13	1.80	22	31.33	8.45	43.81				
AV	5.2926G	111.89	Inf	-Inf	115.92	3	Horizontal	13	1.80	22	31.33	8.45	43.81				
PK	5.3526G	67.31	74.00	-6.69	71.23	3	Horizontal	13	1.80	22	31.40	8.47	43.79				
AV	5.353G	53.94	54.00	-0.06	57.86	3	Horizontal	13	1.80	22	31.40	8.47	43.79				

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX


5300MHz_TX

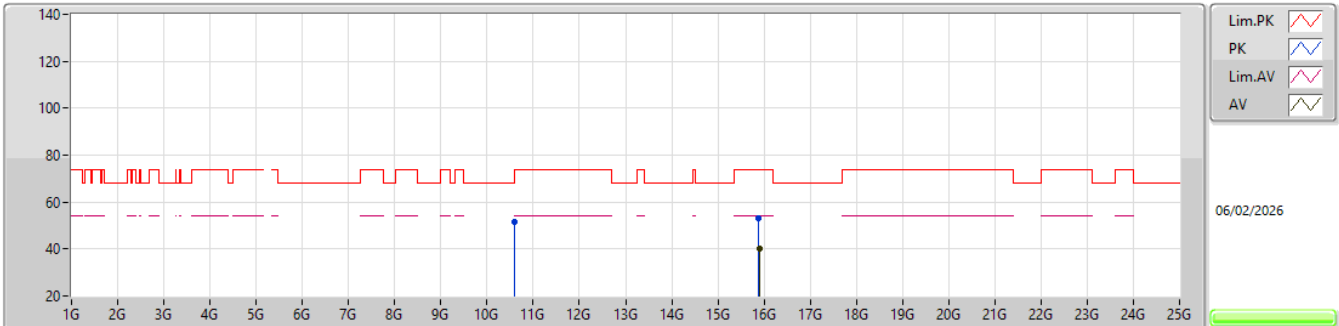EUT_Y_4TX
SET 22

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.59564G	51.64	68.20	-16.56	44.19	3	Vertical	328	1.80	22	39.17	11.86	43.58			
PK	15.88526G	53.11	74.00	-20.89	43.78	3	Vertical	70	2.61	22	37.94	14.59	43.20			
AV	15.91754G	40.07	54.00	-13.93	30.79	3	Vertical	70	2.61	22	37.89	14.60	43.21			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5300MHz_TX

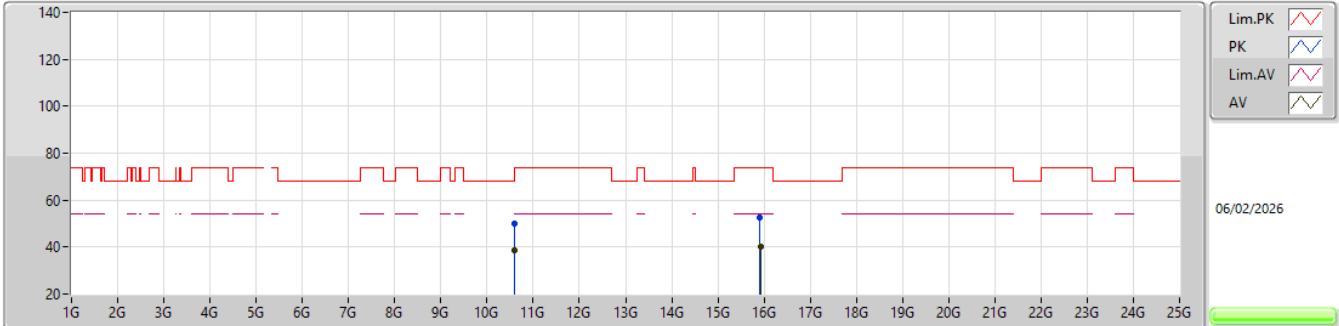


EUT_Y_4TX
SET 22

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)			
PK	10.60008G	50.19	74.00	-23.81	42.71	3	Horizontal	344	1.80	22	39.20	11.86	43.58			
AV	10.60068G	38.54	54.00	-15.46	31.06	3	Horizontal	344	1.80	22	39.20	11.86	43.58			
PK	15.91606G	52.56	74.00	-21.44	43.27	3	Horizontal	77	1.80	22	37.90	14.60	43.21			
AV	15.91946G	39.98	54.00	-14.02	30.71	3	Horizontal	77	1.80	22	37.88	14.60	43.21			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

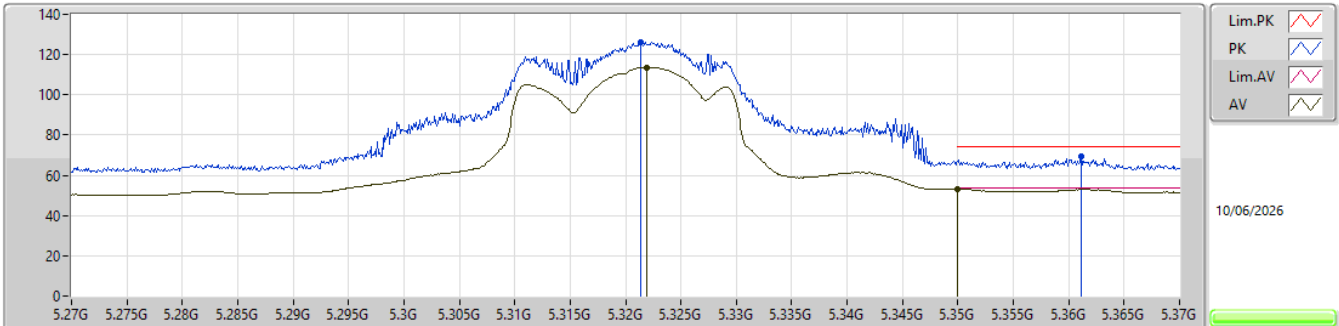


EUT Y_4TX
SET 21
16\21.5\19\20\20.5\21
5.68\0.14\4.18\2.21\1.41\0.65

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3214G	126.11	Inf	-Inf	119.56	3	Vertical	348	1.80	21	33.24	8.35	35.04			
AV	5.3219G	113.72	Inf	-Inf	107.17	3	Vertical	348	1.80	21	33.24	8.35	35.04			
PK	5.3611G	69.37	74.00	-4.63	62.69	3	Vertical	348	1.80	21	33.32	8.39	35.03			
AV	5.35G	53.35	54.00	-0.65	46.70	3	Vertical	348	1.80	21	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

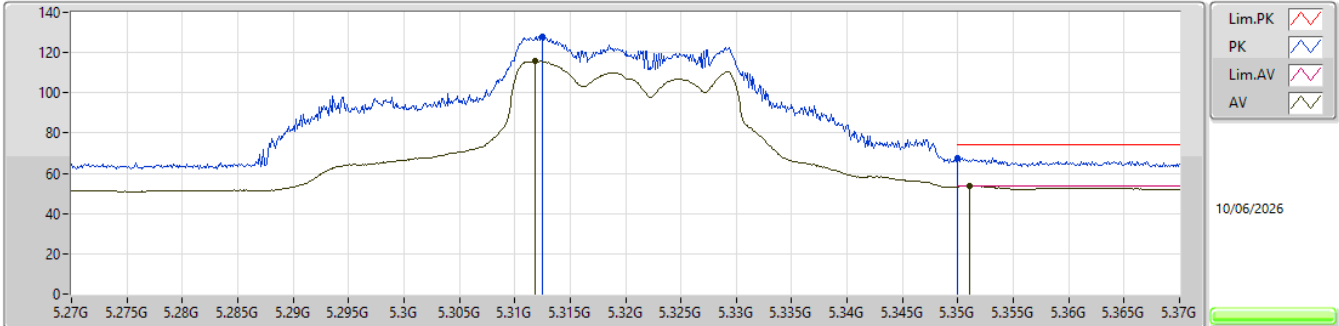


EUT_Y_4TX
SET 19
21\16\18.5\19.5\19
-4.76\2.08\0.90\0.65\0.34

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA			
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)			
PK	5.3125G	127.72	Inf	-Inf	121.19	3	Horizontal	345	1.80	19	33.23	8.35	35.05			
AV	5.3118G	115.84	Inf	-Inf	109.32	3	Horizontal	345	1.80	19	33.22	8.35	35.05			
PK	5.35G	67.76	74.00	-6.24	61.11	3	Horizontal	345	1.80	19	33.30	8.38	35.03			
AV	5.3511G	53.66	54.00	-0.34	47.01	3	Horizontal	345	1.80	19	33.30	8.38	35.03			

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

5320MHz_TX

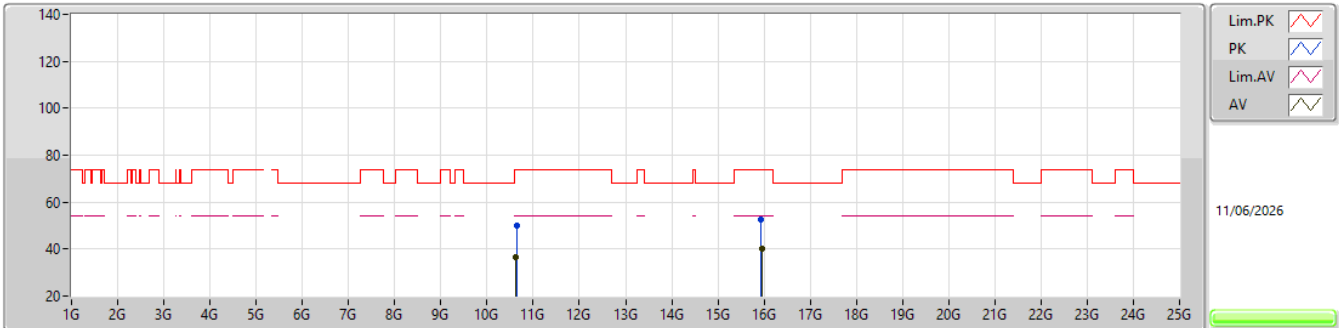

EUT_Y_4TX
SET 19

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)				
PK	10.65742G	49.97	74.00	-24.03	44.38	3	Vertical	268	1.36	-	39.30	11.90	45.61				
AV	10.6247G	36.51	54.00	-17.49	30.92	3	Vertical	268	1.36	-	39.25	11.88	45.54				
PK	15.94226G	52.43	74.00	-21.57	42.98	3	Vertical	55	2.08	-	38.63	14.61	43.79				
AV	15.96284G	40.02	54.00	-13.98	30.71	3	Vertical	55	2.08	-	38.52	14.62	43.83				