

Q90R2 Radar Sensor Manual

Preliminary



Original Instructions
p/n: 237883 Rev. 1
March 20, 2024

© Banner Engineering Corp. All rights reserved.

Contents

Chapter 1

Models	3
Overview	3
Features and Indicators	4
Banner Sensor Tool	4

Chapter 2 Installation Instructions

Sensor Orientation	5
Wiring	5
Mount the Device	5

Chapter 3 Specifications

FCC Part 15 Class A for Intentional Radiators	7
Industry Canada Statement for Intentional Radiators	7
Dimensions	8

Chapter 4 Accessories

Cordsets	9
Brackets	10

Chapter 5 Product Support

Repairs	11
Contact Us	11
Banner Engineering Corp. Software Copyright Notice	11
Banner Engineering Corp Limited Warranty	11

Chapter Contents


Models 3

Overview 3

Features and Indicators..... 4

Banner Sensor Tool..... 4

Chapter 1



- FMCW radar detects moving and stationary objects
- Adjustable sensing field—ignores objects beyond setpoint
- Easy setup and configuration of range, sensitivity, and output using the Banner Radar Configuration Software
- Sensing functions are immune to wind, fog, steam, and temperature changes and resistant to rain and snow
- Compact, rugged IP69K housing withstands harsh environments
- Highly configurable field of view enables precision positioning and control
- Reliable detection across a broad vertical and horizontal field of view



WARNING:

- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

IMPORTANT: To satisfy RF exposure requirements, this device and its antenna must operate with a separation distance of at least 20 cm from all persons.

Models


Models	Detection Range	Supply Voltage	Telecom Approved	Output
Q90R2-12040-6KDQ	0.15 m to 20 m (0.5 ft to 65.6 ft)	10 V DC to 30 V DC	US, Canada, Europe	Dual discrete (NPN/PNP, PFM, and IO-Link)

Overview

The Q90R2 is an industrial radar sensor that uses high-frequency radio waves from its internal antenna to detect and measure distance to objects in its field of view.

The Q90R2 detects a wide variety of materials including metal, liquids, or organic materials. Use the supplied software, IO-Link, or a remote input wire to configure the sensor to sense objects within a specified distance while ignoring objects beyond this distance (background suppression). Or configure the sensor to indicate the presence or absence of objects at a specific (or "taught") distance or range of distances (retroreflective).

Features and Indicators

		LED	Color	Description
	1	Power	Green	Power ON
	2	Signal Strength	Green	Signal strength indication
	3	Output 1	Amber	Discrete output 1 status
	4	Output 2	Amber	Discrete output 2 status

Banner Sensor Tool



Use the Banner Sensor Tool software to:

- Set up the sensor in 3 easy steps: set the switch point distance, signal strength threshold, and response time
- Easily monitor device status via the software
- Visualize the application in real-time
- Make adjustments to sensor settings on the fly

For more information, visit www.bannerengineering.com/us/en/products/sensors/software/radar-configuration.html.

Chapter Contents

Sensor Orientation

Wiring

Mount the Device

5

5

5

Chapter 2

Installation Instructions

Sensor Orientation

Correct sensor-to-object orientation is important to ensure proper sensing.
Minimize the tilt angle of a target relative to the sensor. The target should be tilted less than half of the beam angle.

Wiring

Quick disconnect wiring diagrams are functionally identical.

Dual Discrete Output

bn (1)

bu (3)

bk (4)

wh (2)

gy (5)

+

10-30 V DC

-

D1_Out*/IO-Link

D2_Out*/PFM**

Input

Load

Load

Key:


1 = Brown

2 = White

3 = Blue

4 = Black

5 = Gray (Connect for use with remote input or Banner Radar Configuration software)



* Push-Pull output. User-configurable PNP/NPN setting.

** Pulse Frequency Modulation

NOTE: Banner recommends that the shield wire (quick-disconnect cordsets only) be connected to earth ground or dc common. Shielded cordsets are recommended for all quick-disconnect models.

Mount the Device

1. If a bracket is needed, mount the device onto the bracket.
2. Mount the device (or the device and the bracket) to the machine or equipment at the desired location. Do not tighten the mounting screws at this time.
3. Check the device alignment.
4. Tighten the mounting screws to secure the device (or the device and the bracket) in the aligned position.

Chapter Contents

FCC Part 15 Class A for Intentional Radiators	7
Industry Canada Statement for Intentional Radiators	7
Dimensions.....	8

Chapter 3 Specifications

Response Speed	Fast	Medium	Slow
Response time	48 ms	132 ms	240 ms
Max Velocity	9 m/s	9 m/s	4.5 m/s
Velocity resolution	0.5 m/s	0.25 m/s	0.15 m/s

Operating Principle

Frequency-modulated continuous-wave (FMCW) radar

Operating Frequency

60 GHz to 61.5 GHz

Transmitting Power

peak E.I.R.P: <20 dBm

mean E.I.R.P <20 dBm

Field of View

Horizontal: $\pm 60^\circ$

Vertical: $\pm 20^\circ$

Distance

0.15 m to 20 m (0.5 ft to 65.6 ft)

Distance Resolution

0.1 m

Supply Voltage (Vcc)

10 V DC to 30 V DC

Use only with a suitable Class 2 power supply (UL) or Limited Power Supply (CE)

Power and Current Consumption, exclusive of load

Power consumption: < 2.4 W

Current consumption: <100 mA at 24 V DC

Supply Protection Circuitry

Protected against reverse polarity and transient overvoltages

Delay at Power-up

< 2 s

Output Configuration

Discrete Output 1 (Black Wire): IO-Link, push/pull output, configurable PNP or NPN output

Discrete Output 2 (White Wire): Configurable PNP or NPN, or Pulse Frequency Modulated (PFM) output

Output Protection

Protected against output short-circuit

Remote Input

Allowable Input Voltage Range: 0 to Vsupply

Active High (internal weak pull-down): High state > (Vsupply - 2.25 V) at 2 mA maximum

Active Low (internal weak pull-up): Low state < 2.25 V at 2 mA maximum

Indicators

Power LED: Green, power on

Signal Strength LED:

Green Flash: weak signal

Green Solid: 4× threshold

Output LEDs: Amber, target within taught analog span/ discrete output status

Construction

Housing: Aluminum

Window: Polycarbonate

Connections

Integral M12 quick disconnect

Models with a quick disconnect require a mating cordset

Vibration and Mechanical Shock

All models meet MIL-STD-202G, Method 201A (Vibration: 10 Hz to 60 Hz, 0.06 inch (1.52 mm) double amplitude, 2 hours each along X, Y and Z axes) requirements. Also meets IEC 60947-5-2 (Shock: 30G 11 ms duration, half sine wave) requirements. Method 213B conditions H&I. Shock: 75G with device operating; 100G for non-operation

Operating Temperature

Standard model: -40°C to $+65^\circ\text{C}$ (-40°F to $+149^\circ\text{F}$)

Temperature Effect

± 10 mm from -40°C to $+65^\circ\text{C}$ (-40°F to $+149^\circ\text{F}$)

Environmental Rating

IP67 per IEC60529

IEC IP69K per BS/ISO 20653:2013

Country of Origin

USA

Certifications



Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



Turck Banner LTD Blenheim House
Blenheim Court
Wickford, Essex SS11 8YT
GREAT BRITAIN



ETSI EN 305 550 V2.1.0

ETSI EN 305 550-1 V.1.2.1

ETSI EN 305 550-2 V.1.2.1

FCC ID: UE3Q90R2-6

IC: 7044A-Q90R26

Install where not accessible by unauthorized personnel.

The device shall only be accessible for adjustment, programming, or maintenance.

The device was evaluated for IK08 impact energy in accordance with IEC 62262.

Advanced Capabilities



Output Ratings

Analog Outputs:

- **Current Output (Q90R....-I.. models):** 1 kΩ maximum load resistance at 24 V; maximum load resistance = $[(V_{cc} - 4.5)/0.02 \Omega]$
- **Voltage Output (Q90R....-U.. models):** 2.5 kΩ minimum load resistance
- **Current rating** = 50 mA maximum each

Black wire specifications per configuration		
IO-Link Push/Pull	Output High	$\geq V_{supply} - 2.5 \text{ V}$
	Output Low	$\leq 2.5 \text{ V}$
PNP	Output High	$\geq V_{supply} - 2.5 \text{ V}$
	Output Low	$\leq 1 \text{ V}$ (loads $\leq 1 \text{ Meg}\Omega$)
NPN	Output High	$\geq V_{supply} - 2.5 \text{ V}$
	Output Low	$\leq 2.5 \text{ V}$

White wire specifications per configuration		
PNP	Output High	$\geq V_{supply} - 2.5 \text{ V}$
	Output Low	$\leq 2.5 \text{ V}$ (loads $\leq 70 \text{ k}\Omega$)
NPN	Output High	$\geq V_{supply} - 2.5 \text{ V}$
	Output Low	$\leq 2.5 \text{ V}$

FCC Part 15 Class A for Intentional Radiators

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Industry Canada Statement for Intentional Radiators

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

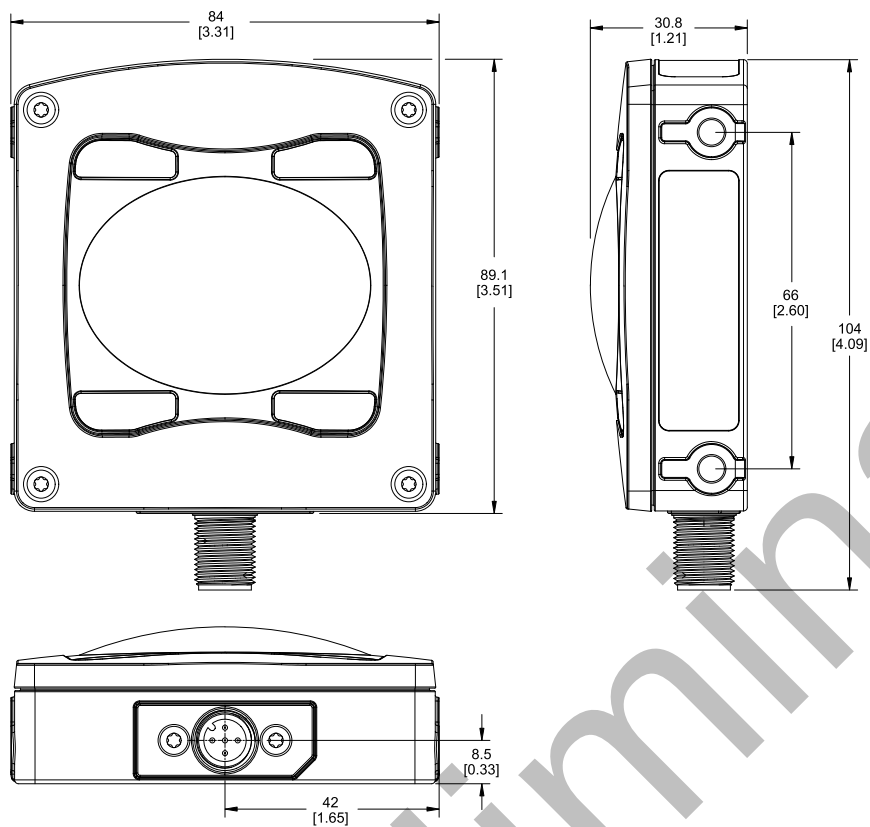
Cet appareil contient des émetteurs/récepteurs exemptés de licence conformes à la norme Innovation, Sciences, et Développement économique Canada. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage.

2. L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Dimensions




All measurements are listed in millimeters [inches], unless noted otherwise.



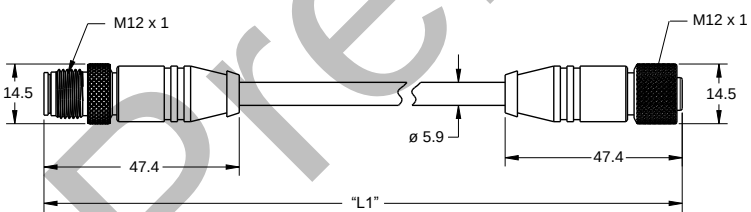




Chapter Contents	
Cordsets	9
Brackets	10

Chapter 4 Accessories

Cordsets

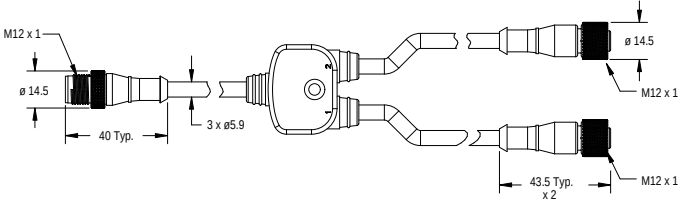
5-Pin Threaded M12 Cordsets with Shield—Single Ended				
Model	Length	Style	Dimensions	Pinout (Female)
MQDEC2-506	2 m (6.56 ft)	Straight		 1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray
MQDEC2-506RA	2 m (6.56 ft)	Right-Angle		

5-Pin Male Threaded and 5-Pin Female Quick Disconnect M12 Cordset with Shield—Double Ended				
Model	Length "L1"	Style	Pinout (Male)	Pinout (Female)
MQDEC3-503SS	0.91 m (2.99 ft)	Female Straight/Male Straight		
MQDEC3-506SS	1.83 m (6 ft)			
			1 = Brown 2 = White 3 = Blue	4 = Black 5 = Gray

5-Pin Threaded M12 Splitter Cordset with Flat Junction				
Model	Trunk (Male)	Branches (Female)	Pinout (Male)	Pinout (Female)
CSB-M1251M1251B	0.3 m (0.98 ft)	0.3 m (0.98 ft)		



Continued on page 10

Continued from page 9

5-Pin Threaded M12 Splitter Cordset with Flat Junction				
Model	Trunk (Male)	Branches (Female)	Pinout (Male)	Pinout (Female)
			1 = Brown 2 = White 3 = Blue	4 = Black 5 = Gray

NOTE: The splitter in the PRO-KIT has two male and one female connectors. The CSB-M1251M1251B splitter has one male and two female connectors. Use the CSB-M1251M1251B to connect the sensor to power and a one of the Banner Pro lights with the Pulse Pro output.

Brackets

SMBAMSQ90R - Adjustable mounting bracket 14-Gauge 304 stainless steel - M6 × 1 mounting hardware included	
SMBRAQ90R - Right-angle mounting bracket 14-Gauge 304 stainless steel - M6 × 1 mounting hardware included	
SMBMAG3 3.2 inch diameter magnet with 95 lbs pull force - Use with LMBWLC90PT, SMBAMS70AS, SMBAMSQ90R bracket - Hardware for mounting to bracket included	

NOTE: Use SMBMAG3 with SMBAMSQ90R.

Chapter Contents

Repairs	11
Contact Us	11
Banner Engineering Corp. Software Copyright Notice	11
Banner Engineering Corp Limited Warranty	11

Chapter 5 Product Support

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

You may be asked to provide the configuration file and the data log file (.cfg) to aid in troubleshooting.

Contact Us

Banner Engineering Corp. headquarters is located at: 9714 Tenth Avenue North | Minneapolis, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp. Software Copyright Notice

© Banner Engineering Corp., All Rights Reserved.

<https://www.bannerengineering.com/us/en/company/terms-and-conditions.html>

Disclaimer of Warranties. This software is provided "AS-IS." To the maximum extent permitted by applicable law, Banner, its affiliates, and its channel partners disclaim all warranties, expressed or implied, including any warranty that the software is fit for a particular purpose, title, merchantability, data loss, non-interference with or non-infringement of any intellectual property rights, or the accuracy, reliability, quality or content in or linked to the services. Banner and its affiliates and channel partners do not warrant that the services are secure, free from bugs, viruses, interruption, errors, theft or destruction. If the exclusions for implied warranties do not apply to you, any implied warranties are limited to 60 days from the date of first use of this software.

Limitation of Liability and Indemnity. Banner, its affiliates and channel partners are not liable for indirect, special, incidental, punitive or consequential damages, damages relating to corruption, security, loss or theft of data, viruses, spyware, loss of business, revenue, profits, or investment, or use of software or hardware that does not meet Banner minimum systems requirements. The above limitations apply even if Banner and its affiliates and channel partners have been advised of the possibility of such damages. This Agreement sets forth the entire liability of Banner, its affiliates and your exclusive remedy with respect to the software use.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

Preliminary



[LinkedIn](#)



[Twitter](#)



[Facebook](#)

