RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.79621	56.95	PK-U	34.1	-48.5	0	42.55	-	-	74	-31.45	-	-	87	104	H
	* ** 4.79627	44.93	ADV	34.1	-48.5	.24	30.77	54	-23.23	-	-	-	-	87	104	H
5	* ** 4.56456	57.74	PK-U	34.1	-49.3	0	42.54	-	-	74	-31.46	-	-	197	104	V
	* ** 4.56637	45.07	ADV	34.1	-49.3	.24	30.11	54	-23.89	-	-	-	-	197	104	V
3	* ** 12.39344	51.47	PK-U	39	-40	0	50.47	-	-	74	-23.53	-	-	226	102	H
	* ** 12.39074	38.64	ADV	39	-40	.24	37.88	54	-16.12	-	-	-	-	226	102	H
4	* ** 16.06182	50.9	PK-U	41.3	-36.4	0	55.8	-	-	74	-18.2	-	-	315	385	H
	* ** 16.06142	38.33	ADV	41.3	-36.5	.24	43.37	54	-10.63	-	-	-	-	315	385	H
7	* ** 11.34326	54.27	PK-U	38	-43	0	49.27	-	-	74	-24.73	-	-	16	397	V
	* ** 11.34283	40.79	ADV	38	-43	.24	36.03	54	-17.97	-	-	-	-	16	397	V
8	* ** 17.76251	49.68	PK-U	41.6	-33.6	0	57.68	-	-	74	-16.32	-	-	248	397	V
	* ** 17.76414	37.5	ADV	41.5	-33.8	.24	45.44	54	-8.56	-	-	-	-	248	397	V
2	7.01319	58.75	PK-U	35.7	-47.8	0	46.65	-	-	-	-	68.2	-21.55	63	397	H
6	7.01335	59.76	PK-U	35.7	-47.8	0	47.66	-	-	-	-	68.2	-20.54	238	393	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

MID CHANNEL RESULTS

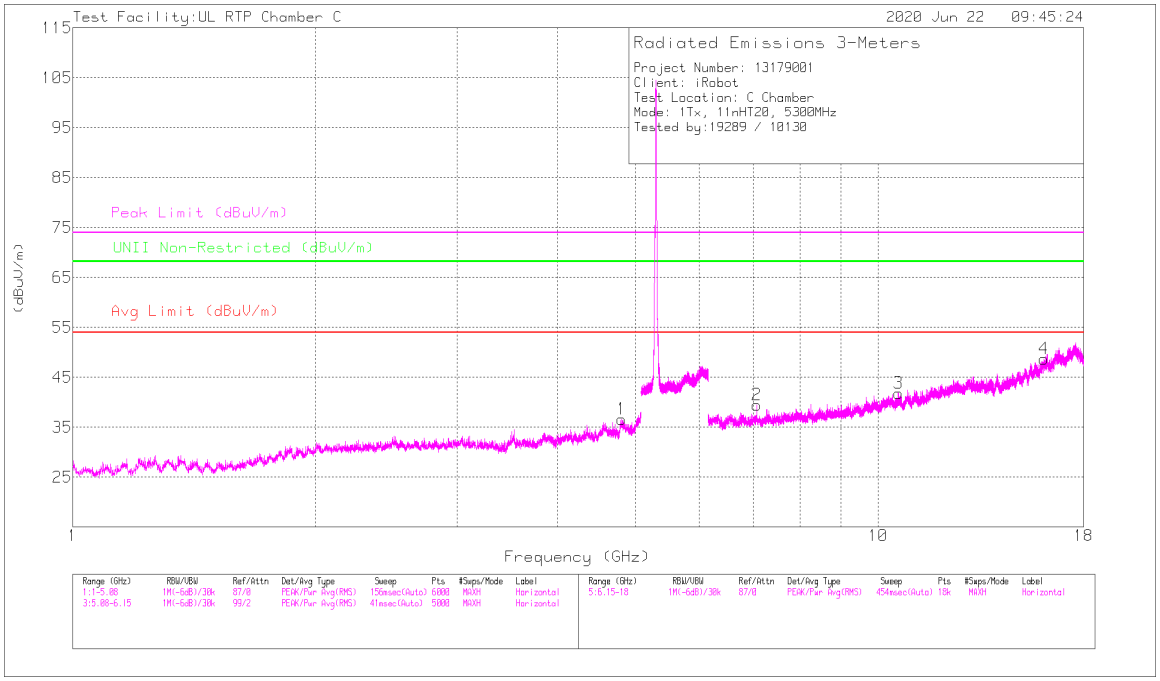

HORIZONTAL

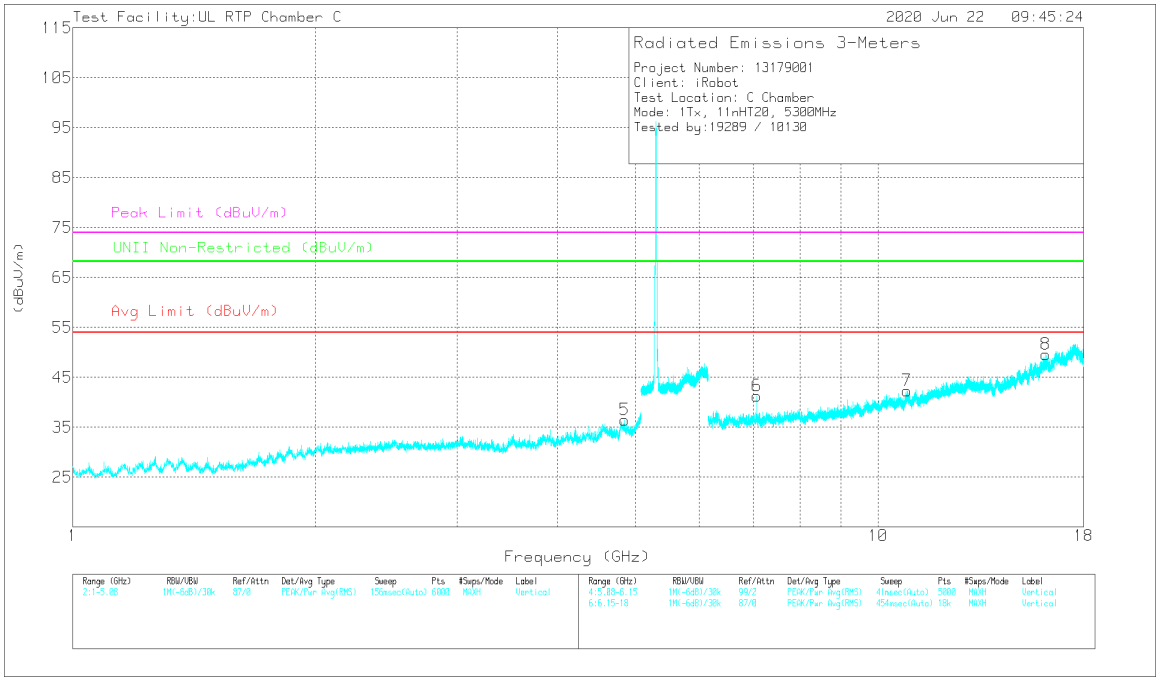

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.80571	56.05	PK-U	34.1	-48.8	0	41.35	-	-	74	-32.65	-	-	0	102	H
	* ** 4.8049	43.07	ADV	34.1	-48.8	.24	28.61	54	-25.39	-	-	-	-	0	102	H
5	* ** 4.8492	57.47	PK-U	34	-49.2	0	42.27	-	-	74	-31.73	-	-	360	102	V
	* ** 4.84862	44.23	ADV	34	-49.2	.24	29.27	54	-24.73	-	-	-	-	360	102	V
3	* ** 10.6034	54.52	PK-U	37.5	-43.9	0	48.12	-	-	74	-25.88	-	-	330	131	H
	* ** 10.60339	41.48	ADV	37.5	-43.9	.24	35.32	54	-18.68	-	-	-	-	330	131	H
4	* ** 16.07864	51.72	PK-U	41.3	-36.6	0	56.42	-	-	74	-17.58	-	-	100	115	H
	* ** 16.07823	38.1	ADV	41.3	-36.6	.24	43.04	54	-10.96	-	-	-	-	100	115	H
7	* ** 10.86039	52.32	PK-U	37.7	-42.1	0	47.92	-	-	74	-26.08	-	-	125	104	V
	* ** 10.86031	39.56	ADV	37.7	-42.1	.24	35.4	54	-18.6	-	-	-	-	125	104	V
8	* ** 16.1393	52.47	PK-U	41.3	-38	0	55.77	-	-	74	-18.23	-	-	83	362	V
	* ** 16.13903	39.16	ADV	41.3	-38	.24	42.7	54	-11.3	-	-	-	-	83	362	V
6	7.06652	58.43	PK-U	35.7	-46.5	0	47.63	-	-	-	-	68.2	-20.57	312	388	V
2	7.06655	57.59	PK-U	35.7	-46.5	0	46.79	-	-	-	-	68.2	-21.41	55	397	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

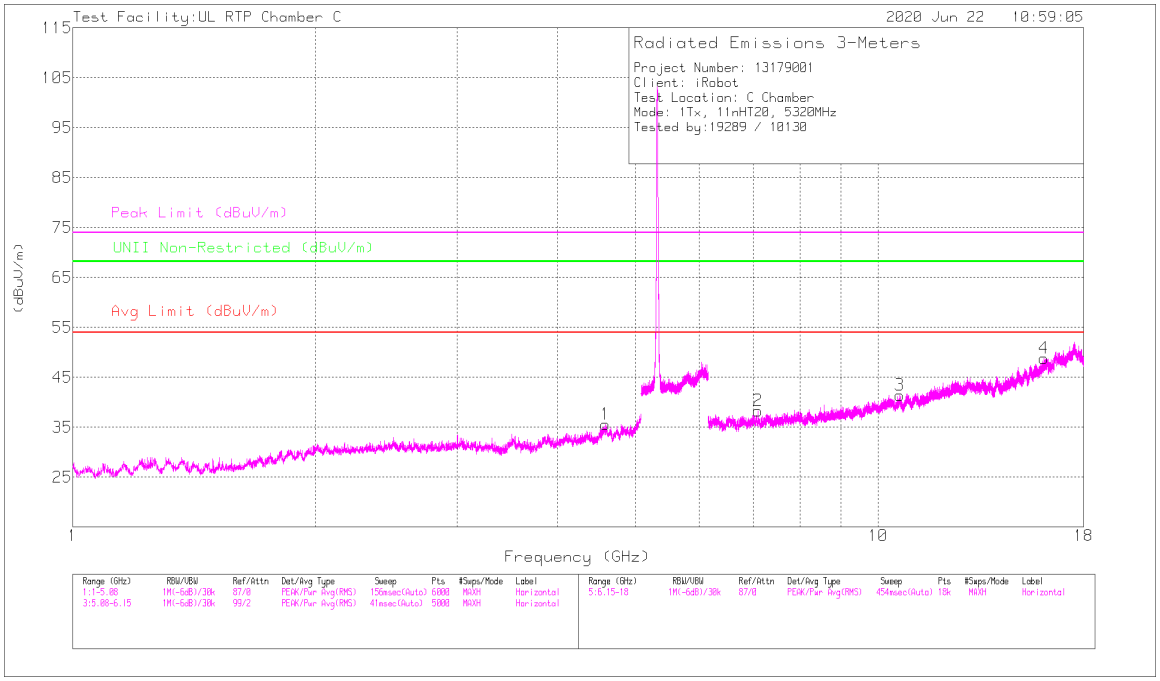

HORIZONTAL

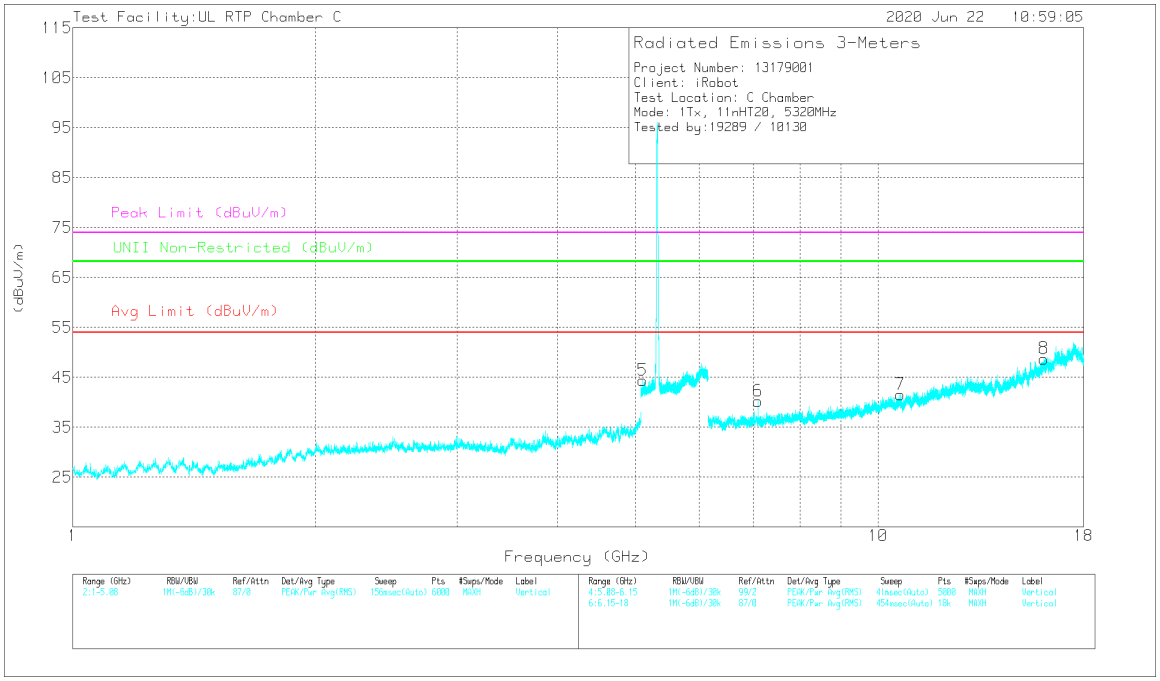

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.58864	57.93	PK-U	34.1	-49.8	0	42.23	-	-	74	-31.77	-	-	150	102	H
	* ** 4.58881	44.43	ADV	34.1	-49.8	.24	28.97	54	-25.03	-	-	-	-	150	102	H
5	* ** 5.10364	31.82	PK-U	34.2	-15.7	0	50.32	-	-	74	-23.68	-	-	23	145	V
	* ** 5.10376	18.38	ADV	34.2	-15.7	.24	37.12	54	-16.88	-	-	-	-	23	145	V
3	* ** 10.64538	54.88	PK-U	37.5	-43.1	0	49.28	-	-	74	-24.72	-	-	346	107	H
	* ** 10.64499	41.08	ADV	37.5	-43.1	.24	35.72	54	-18.28	-	-	-	-	346	107	H
4	* ** 16.07465	51.25	PK-U	41.3	-36.4	0	56.15	-	-	74	-17.85	-	-	305	182	H
	* ** 16.07419	37.83	ADV	41.3	-36.3	.24	43.07	54	-10.93	-	-	-	-	305	182	H
7	* ** 10.66464	52.34	PK-U	37.5	-43.2	0	46.64	-	-	74	-27.36	-	-	186	150	V
	* ** 10.66281	39.52	ADV	37.5	-43.3	.24	33.96	54	-20.04	-	-	-	-	186	150	V
8	* ** 16.0604	50.58	PK-U	41.3	-36.5	0	55.38	-	-	74	-18.62	-	-	337	266	V
	* ** 16.06131	37.55	ADV	41.3	-36.5	.24	42.59	54	-11.41	-	-	-	-	337	266	V
6	7.093	57.53	PK-U	35.7	-46.7	0	46.53	-	-	-	-	68.2	-21.67	115	398	V
2	7.09351	56.22	PK-U	35.7	-46.7	0	45.22	-	-	-	-	68.2	-22.98	43	269	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

10.1.7. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX External Antenna MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

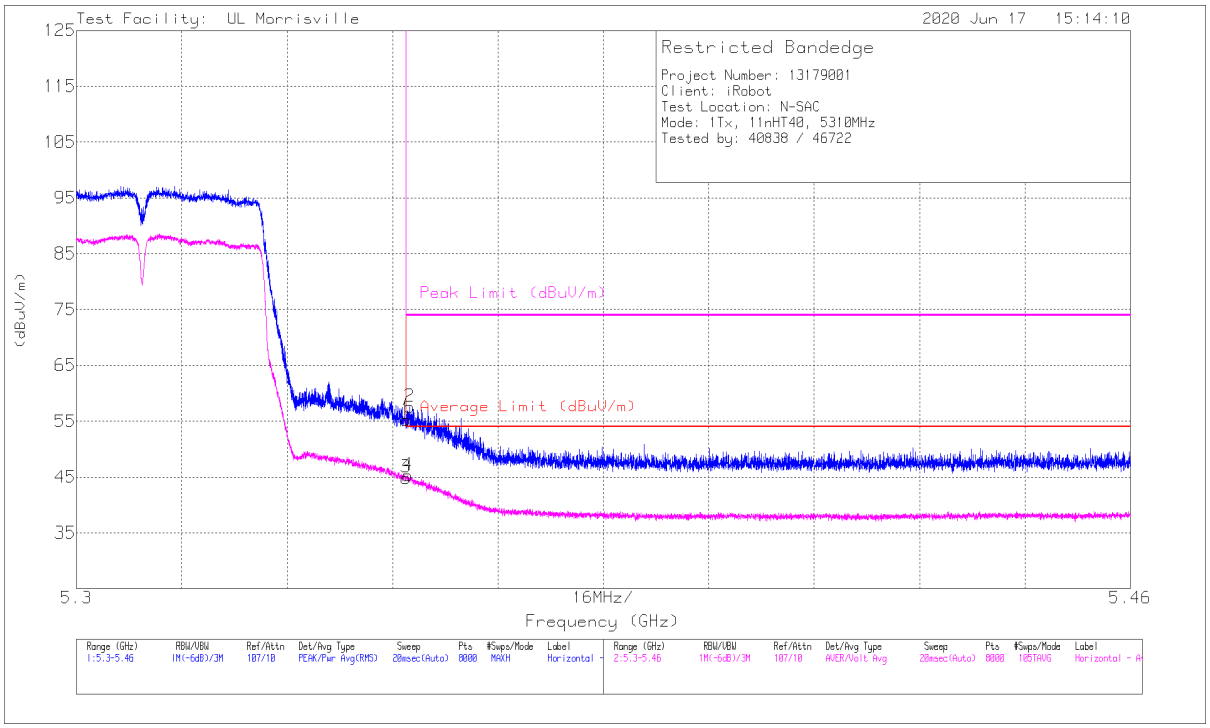

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	42.94	Pk	34.4	-22.1	0	55.24	-	-	74	-18.76	125	169	H
2	* ** 5.35059	45.32	Pk	34.4	-22.1	0	57.62	-	-	74	-16.38	125	169	H
3	* ** 5.35001	32.09	ADV	34.4	-22.1	.47	44.86	54	-9.14	-	-	125	169	H
4	* ** 5.35033	32.49	ADV	34.4	-22.1	.47	45.26	54	-8.74	-	-	125	169	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

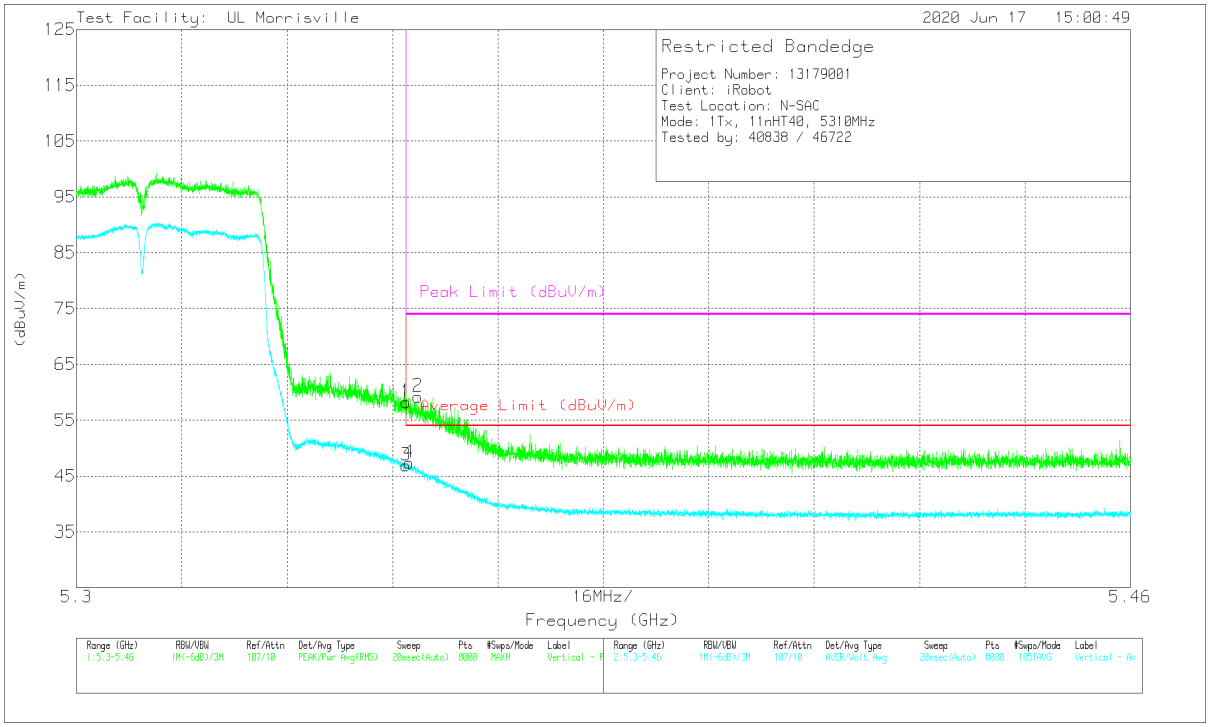

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	45.94	Pk	34.4	-22.1	0	58.24	-	-	74	-15.76	1	206	V
2	* ** 5.35183	46.94	Pk	34.4	-22.1	0	59.24	-	-	74	-14.76	1	206	V
3	* ** 5.35001	34.12	ADV	34.4	-22.1	.47	46.89	54	-7.11	-	-	1	206	V
4	* ** 5.35049	34.58	ADV	34.4	-22.1	.47	47.35	54	-6.65	-	-	1	206	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

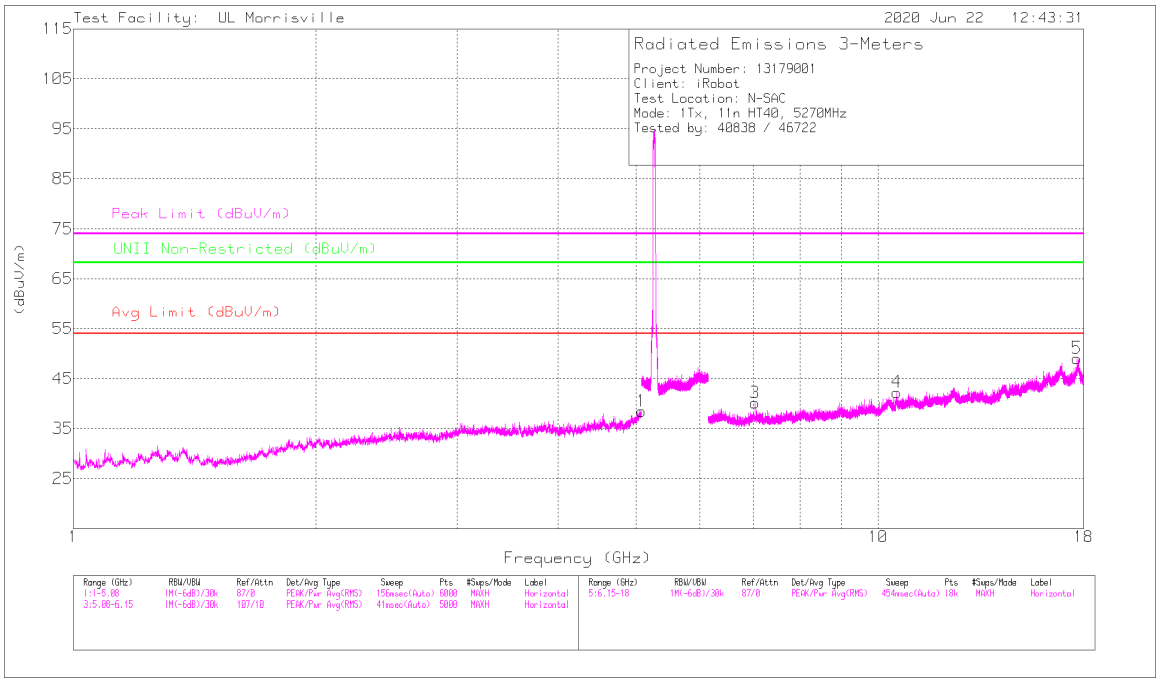

HORIZONTAL

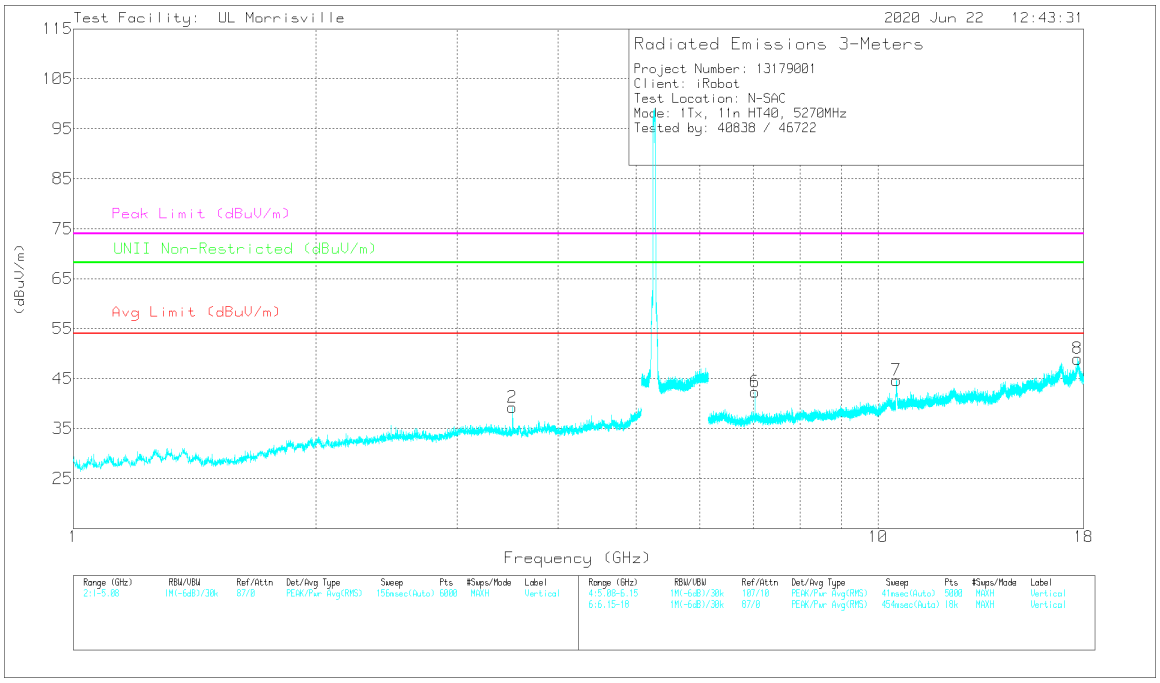

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.07903	40.77	PK-U	34.3	-29.1	0	45.97	-	-	74	-28.03	-	-	301	227	H
	* ** 5.07819	27.53	ADV	34.2	-29.2	.47	33.00	54	-21.00	-	-	-	-	301	227	H
2	* ** 3.51333	44.43	PK-U	33	-32.7	0	44.73	-	-	74	-29.27	-	-	100	223	V
	* ** 3.51332	36.32	ADV	33	-32.7	.47	37.09	54	-16.91	-	-	-	-	100	223	V
3	7.02663	40.12	PK-U	35.7	-28.9	0	46.92	-	-	-	-	68.2	-21.28	322	329	H
6	7.02667	40.51	PK-U	35.7	-28.9	0	47.31	-	-	-	-	68.2	-20.89	41	265	V
7	10.53761	37.96	PK-U	37.6	-25.8	0	49.76	-	-	-	-	68.2	-18.44	82	291	V
4	10.54088	36.97	PK-U	37.6	-25.8	0	48.77	-	-	-	-	68.2	-19.43	17	128	H
5	17.67063	34.61	PK-U	41.7	-21.3	0	55.01	-	-	-	-	68.2	-13.19	48	400	H
8	17.68829	33.83	PK-U	41.8	-20.8	0	54.83	-	-	-	-	68.2	-13.37	76	255	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

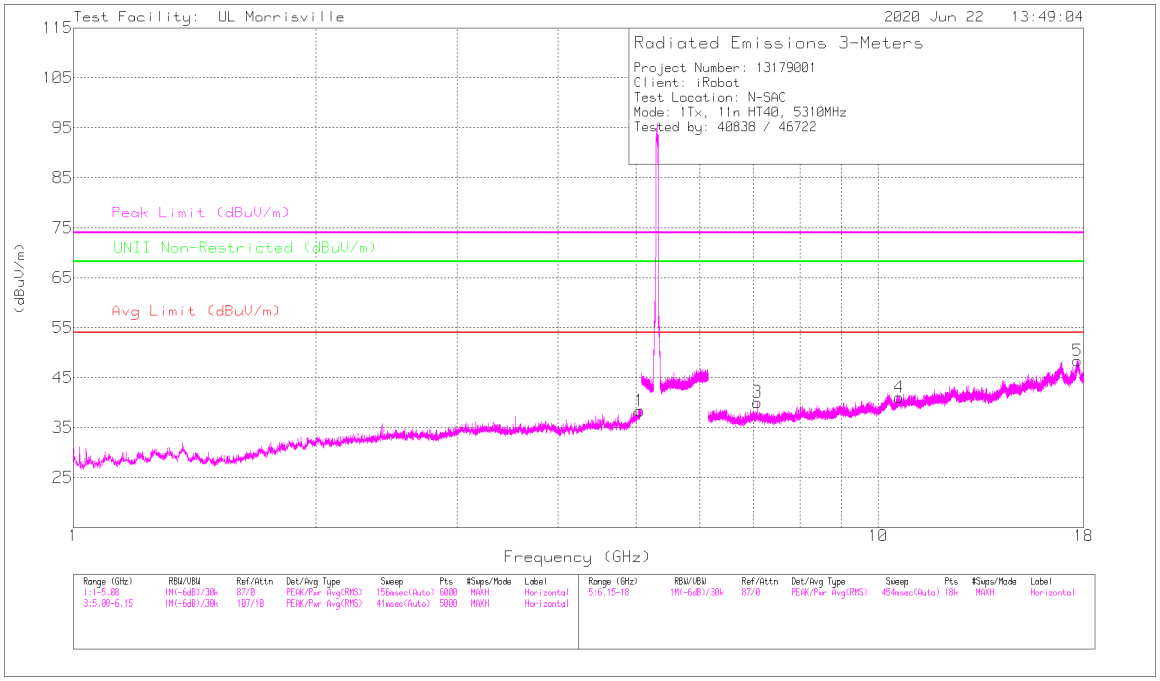

HORIZONTAL

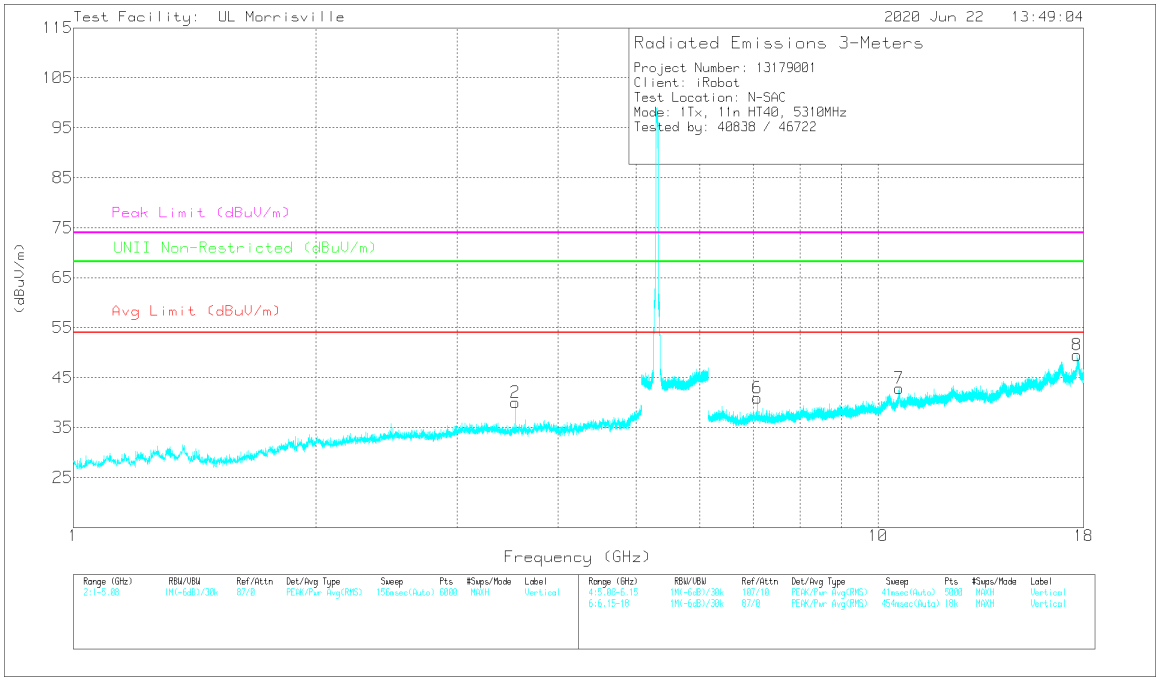

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.05975	40.57	PK-U	34.2	-30.3	0	44.47	-	-	74	-29.53	-	-	219	327	H
	* ** 5.05956	28.21	ADV	34.1	-30.3	.47	32.48	54	-21.52	-	-	-	-	219	327	H
2	* ** 3.53999	44.53	PK-U	33.1	-32.3	0	45.33	-	-	74	-28.67	-	-	55	269	V
	* ** 3.53999	37.37	ADV	33.1	-32.3	.47	38.64	54	-15.36	-	-	-	-	55	269	V
4	* ** 10.61636	35.31	PK-U	37.7	-25.2	0	47.81	-	-	74	-26.19	-	-	67	234	H
	* ** 10.61691	21.89	ADV	37.7	-25.2	.47	34.86	54	-19.14	-	-	-	-	67	234	H
7	* ** 10.61987	37.24	PK-U	37.7	-25.1	0	49.84	-	-	74	-24.16	-	-	198	334	V
	* ** 10.61989	24.74	ADV	37.7	-25.1	.47	37.81	54	-16.19	-	-	-	-	198	334	V
3	7.07988	39.63	PK-U	35.7	-29.4	0	45.93	-	-	-	-	68.2	-22.27	125	381	H
6	7.08016	40.78	PK-U	35.7	-29.4	0	47.08	-	-	-	-	68.2	-21.12	13	353	V
8	17.66861	34.48	PK-U	41.8	-21.4	0	54.88	-	-	-	-	68.2	-13.32	108	200	V
5	17.68073	34.44	PK-U	41.7	-21.1	0	55.04	-	-	-	-	68.2	-13.16	219	190	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

1TX PCB Antenna MODE

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

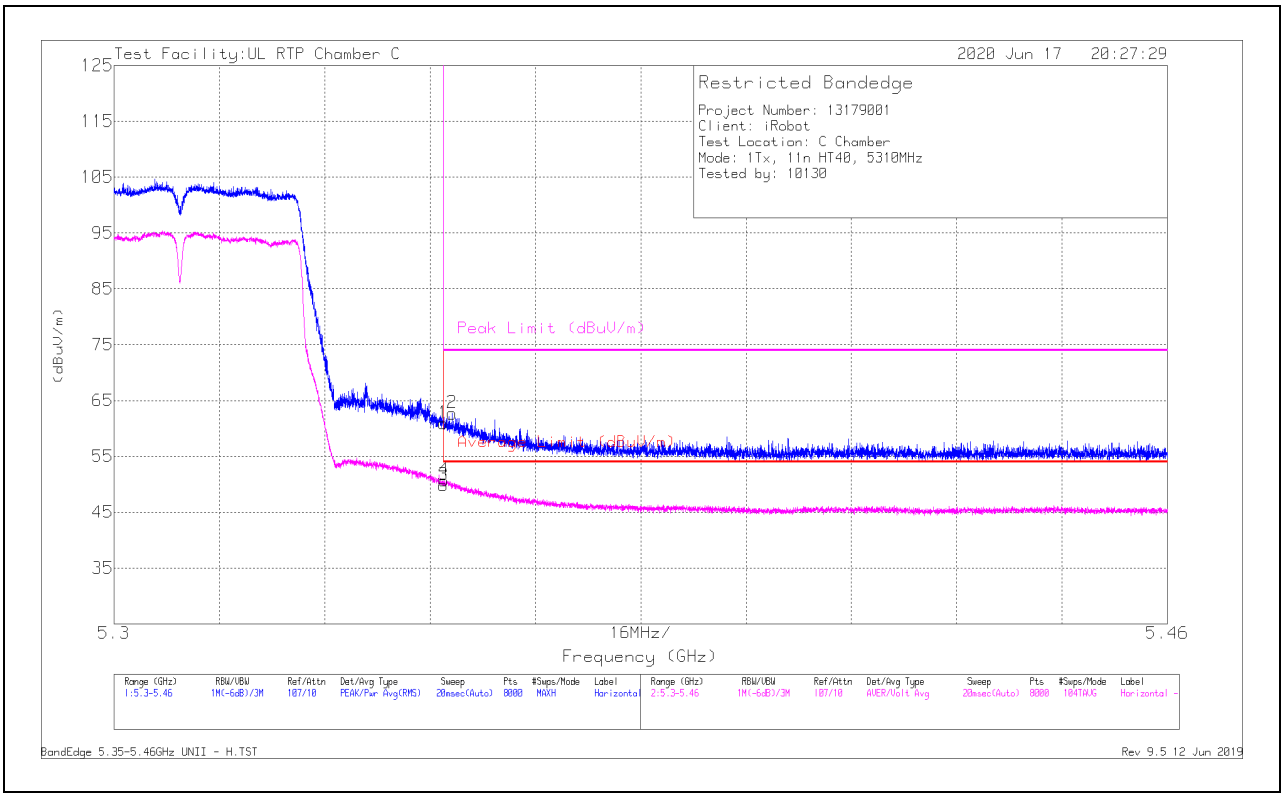

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	41.71	Pk	34.6	-15.4	0	60.91	-	-	74	-13.09	93	114	H
2	* ** 5.35137	43.51	Pk	34.6	-15.4	0	62.71	-	-	74	-11.29	93	114	H
3	* ** 5.35001	30.2	ADV	34.6	-15.4	.47	49.87	54	-4.13	-	-	93	114	H
4	* ** 5.35009	31.06	ADV	34.6	-15.4	.47	50.73	54	-3.27	-	-	93	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

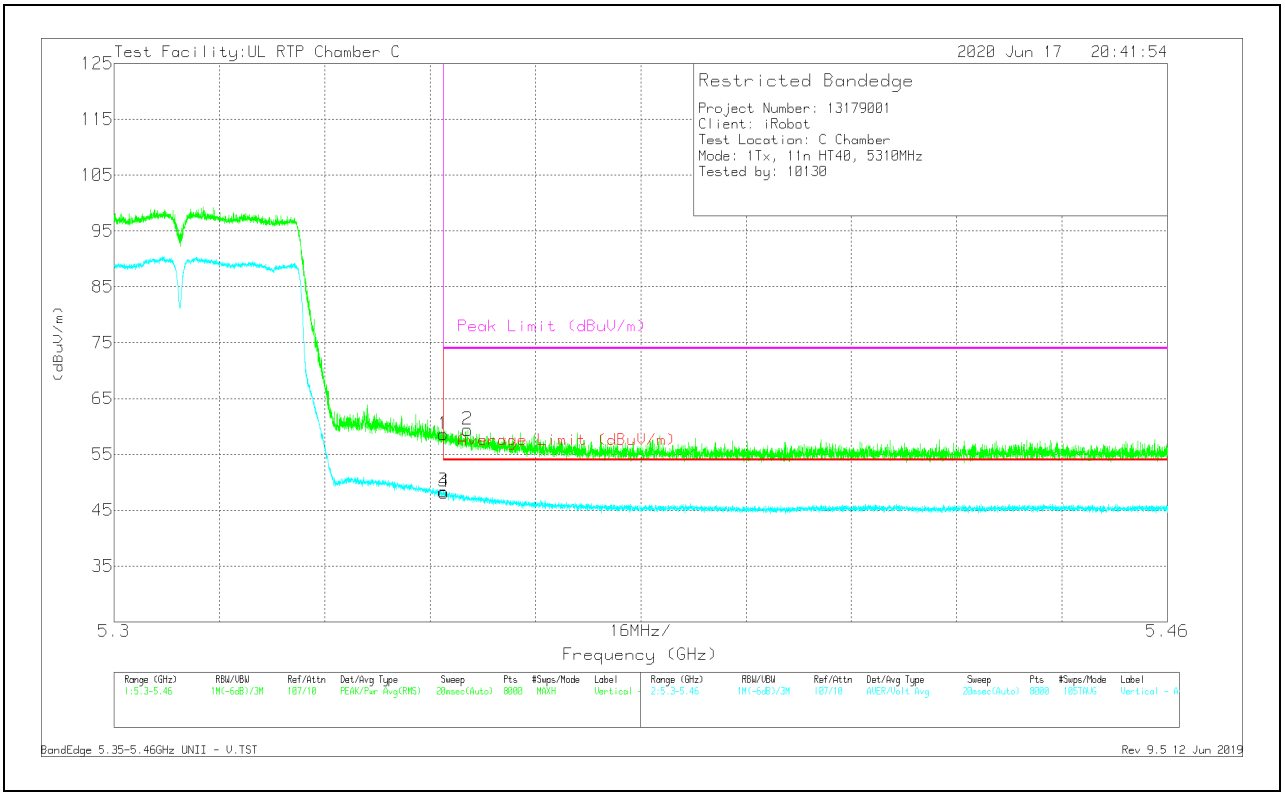

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35001	39.39	Pk	34.6	-15.4	0	58.59	-	-	74	-15.41	248	267	V
2	* ** 5.35369	40.2	Pk	34.6	-15.4	0	59.4	-	-	74	-14.6	248	267	V
3	* ** 5.35001	28.73	ADV	34.6	-15.4	.47	48.4	54	-5.6	-	-	248	267	V
4	* ** 5.35011	28.53	ADV	34.6	-15.4	.47	48.2	54	-5.8	-	-	248	267	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

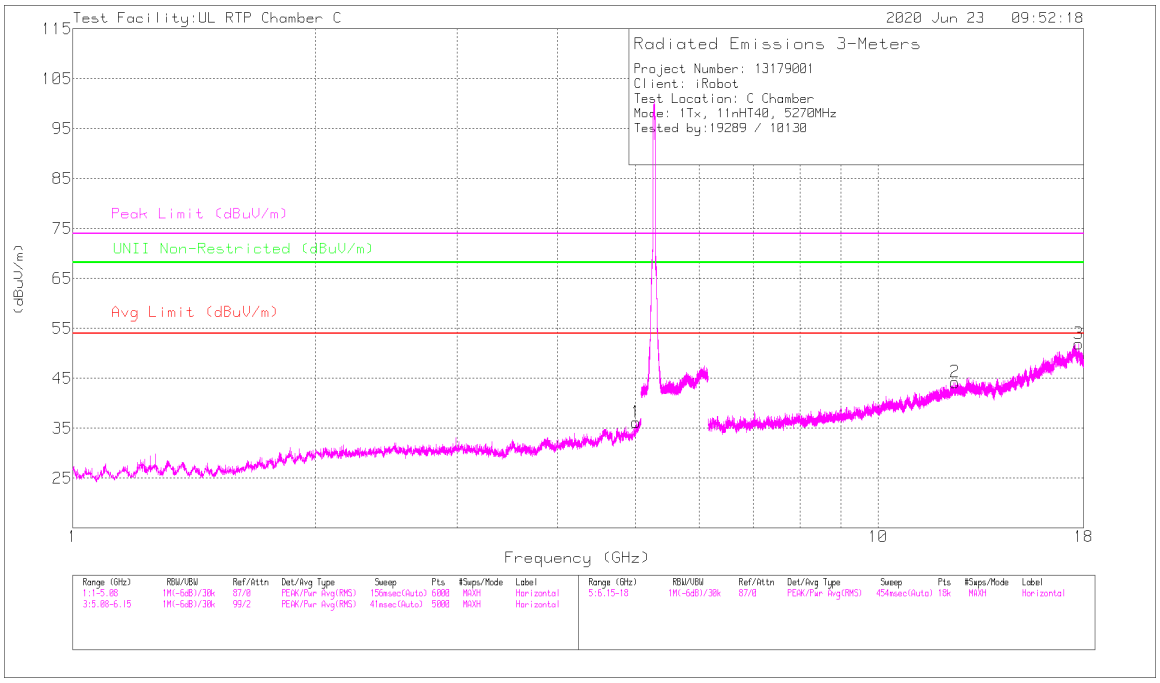

HORIZONTAL

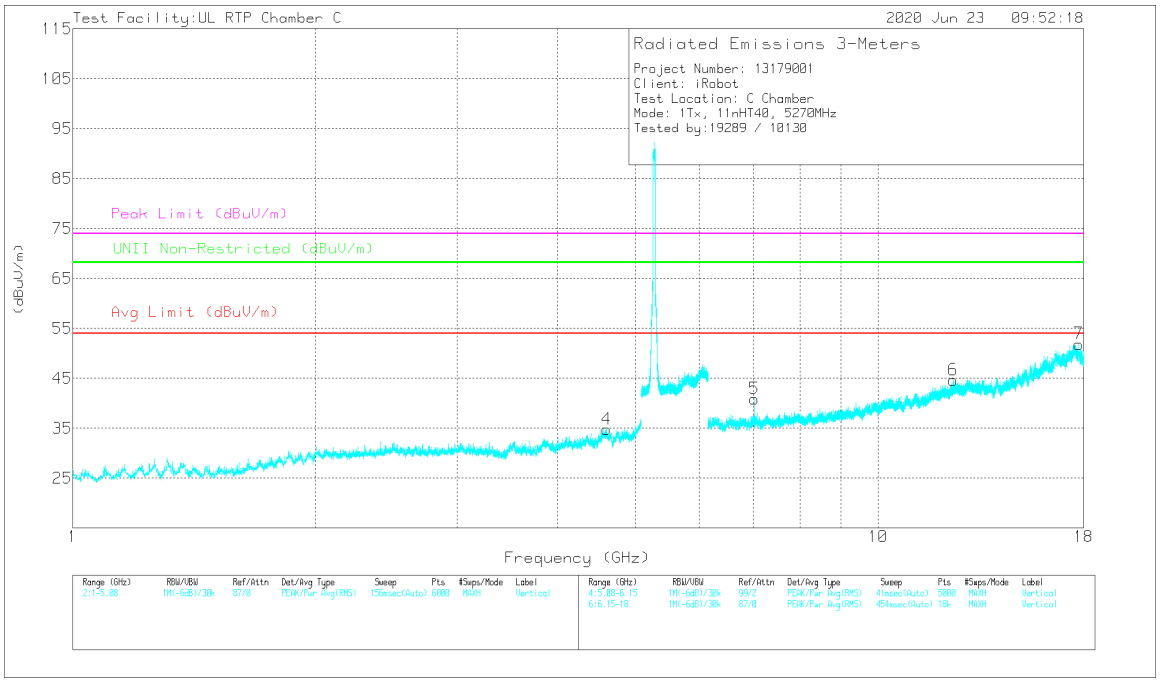

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.00737	55.77	PK-U	34.1	-47.8	0	42.07	-	-	74	-31.93	-	-	153	102	H
	* ** 5.0069	42.78	ADV	34.1	-47.8	.47	29.55	54	-24.45	-	-	-	-	153	102	H
4	* ** 4.60643	56.93	PK-U	34.2	-49.7	0	41.43	-	-	74	-32.57	-	-	34	102	V
	* ** 4.60624	43.82	ADV	34.2	-49.7	.47	28.79	54	-25.21	-	-	-	-	34	102	V
2	* ** 12.46369	53.56	PK-U	39	-41.2	0	51.36	-	-	74	-22.64	-	-	220	147	H
	* ** 12.46406	39.07	ADV	39	-41.2	.47	37.34	54	-16.66	-	-	-	-	220	147	H
3	* ** 17.75727	49.93	PK-U	41.6	-33.5	0	58.03	-	-	74	-15.97	-	-	353	242	H
	* ** 17.75672	36.75	ADV	41.6	-33.6	.47	45.22	54	-8.78	-	-	-	-	353	242	H
6	* ** 12.40483	51.51	PK-U	39	-40.2	0	50.31	-	-	74	-23.69	-	-	350	129	V
	* ** 12.40488	38.33	ADV	39	-40.2	.47	37.6	54	-16.4	-	-	-	-	350	129	V
7	* ** 17.74022	49.13	PK-U	41.6	-33.6	0	57.13	-	-	74	-16.87	-	-	67	297	V
	* ** 17.73971	36.35	ADV	41.6	-33.6	.47	44.82	54	-9.18	-	-	-	-	67	297	V
5	7.02661	58.59	PK-U	35.7	-47.5	0	46.79	-	-	-	-	68.2	-21.41	235	303	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

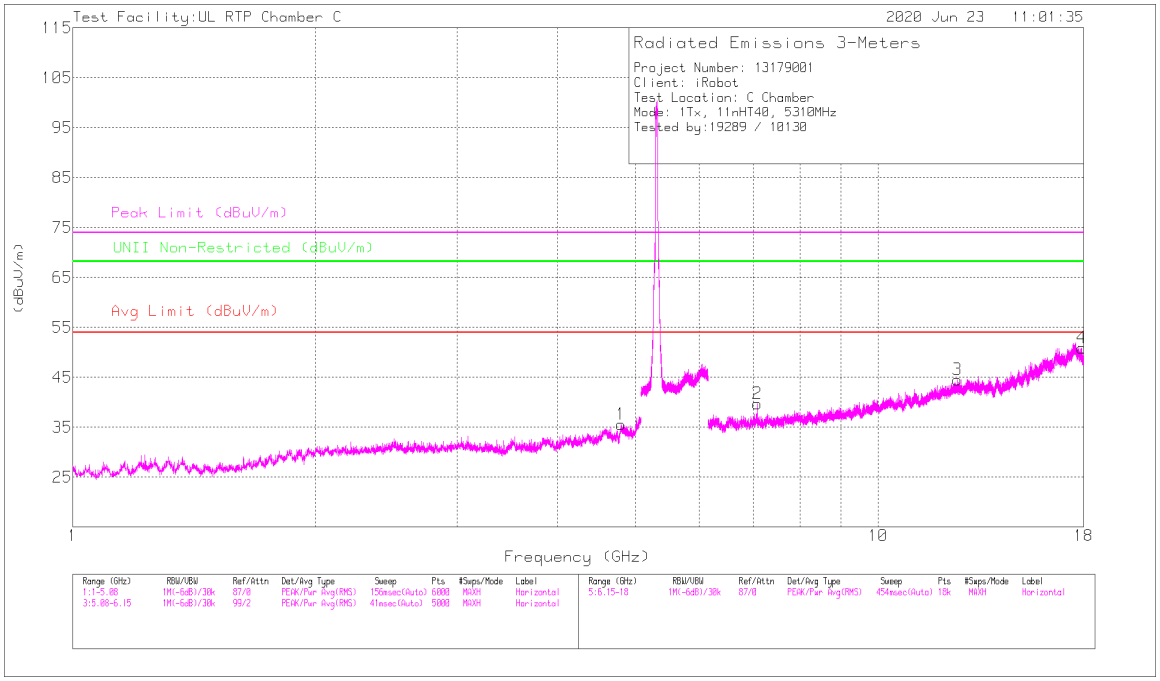

HORIZONTAL

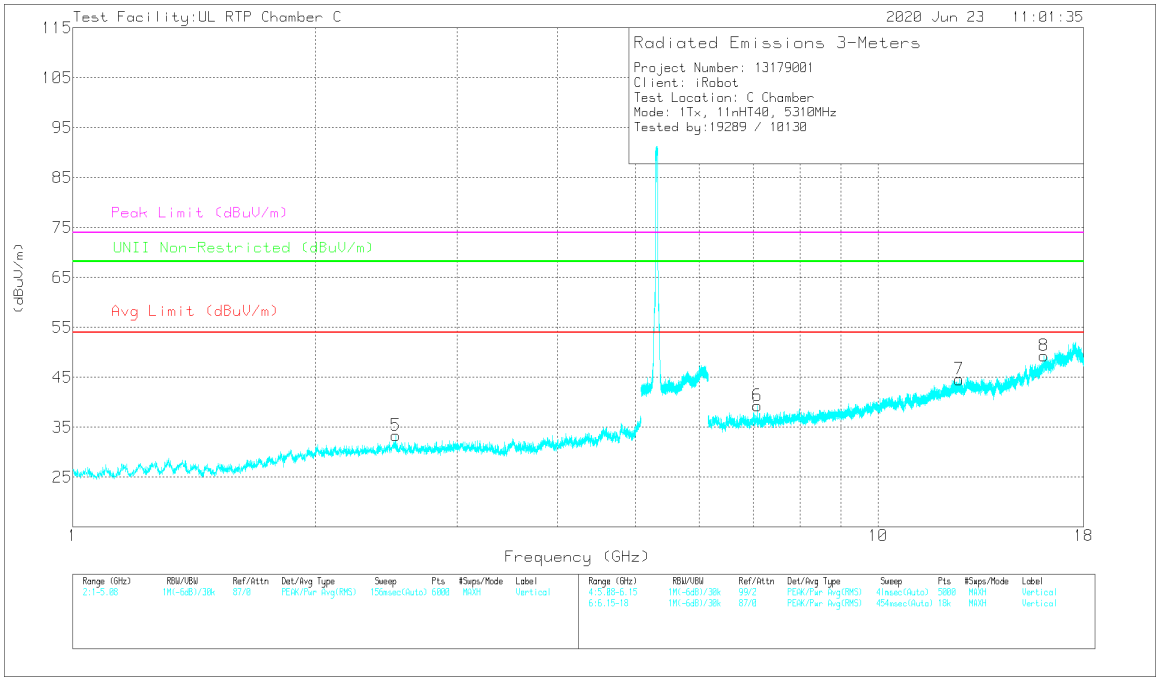

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.79671	54.99	PK-U	34.1	-48.5	0	40.59	-	-	74	-33.41	-	-	299	102	H
	* ** 4.79658	41.96	ADV	34.1	-48.5	.47	28.03	54	-25.97	-	-	-	-	299	102	H
5	** 2.51716	59.13	PK-U	32.7	-52.2	0	39.63	-	-	74	-34.37	68.2	-28.57	106	340	V
	** 2.51686	46.12	ADV	32.7	-52.2	.47	27.09	54	-26.91	-	-	-	-	106	340	V
3	* ** 12.55449	52.56	PK-U	39.1	-40.6	0	51.06	-	-	74	-22.94	-	-	35	294	H
	* ** 12.5542	39.01	ADV	39.1	-40.6	.47	37.98	54	-16.02	-	-	-	-	35	294	H
4	* ** 17.91927	50.18	PK-U	41.4	-34.6	0	56.98	-	-	74	-17.02	-	-	174	334	H
	* ** 17.92001	36.9	ADV	41.4	-34.6	.47	44.17	54	-9.83	-	-	-	-	174	334	H
7	* ** 12.62419	51.26	PK-U	39.2	-40.6	0	49.86	-	-	74	-24.14	-	-	360	175	V
	* ** 12.62399	38.31	ADV	39.2	-40.6	.47	37.38	54	-16.62	-	-	-	-	360	175	V
8	* ** 16.07223	50.89	PK-U	41.3	-36.4	0	55.79	-	-	74	-18.21	-	-	139	133	V
	* ** 16.07264	37.69	ADV	41.3	-36.4	.47	43.06	54	-10.94	-	-	-	-	139	133	V
2	7.07985	56.12	PK-U	35.7	-46.5	0	45.32	-	-	-	-	68.2	-22.88	164	123	H
6	7.07993	57.26	PK-U	35.7	-46.5	0	46.46	-	-	-	-	68.2	-21.74	297	110	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

10.1.8. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX External Antenna MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

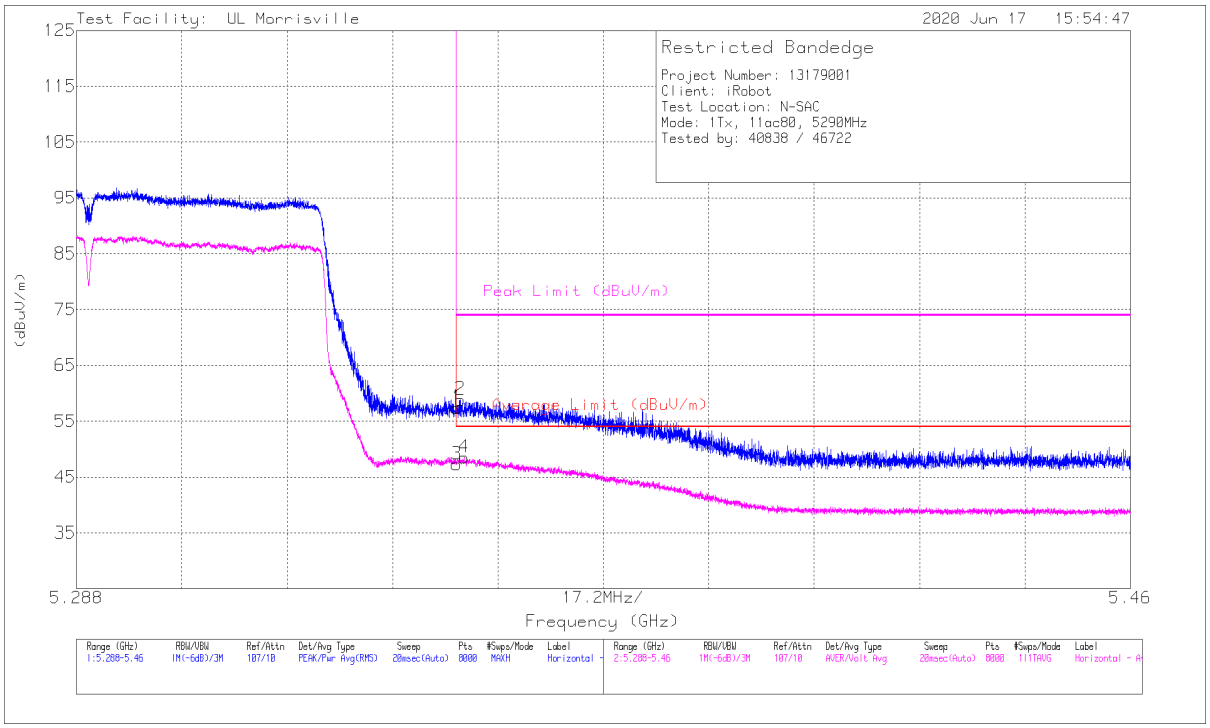

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	45.08	Pk	34.4	-22.1	0	57.38	-	-	74	-16.62	44	103	H
2	* ** 5.3507	46.57	Pk	34.4	-22.1	0	58.87	-	-	74	-15.13	44	103	H
3	* ** 5.35002	34.02	ADV	34.4	-22.1	.91	47.23	54	-6.77	-	-	44	103	H
4	* ** 5.35131	35.21	ADV	34.4	-22.1	.91	48.42	54	-5.58	-	-	44	103	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

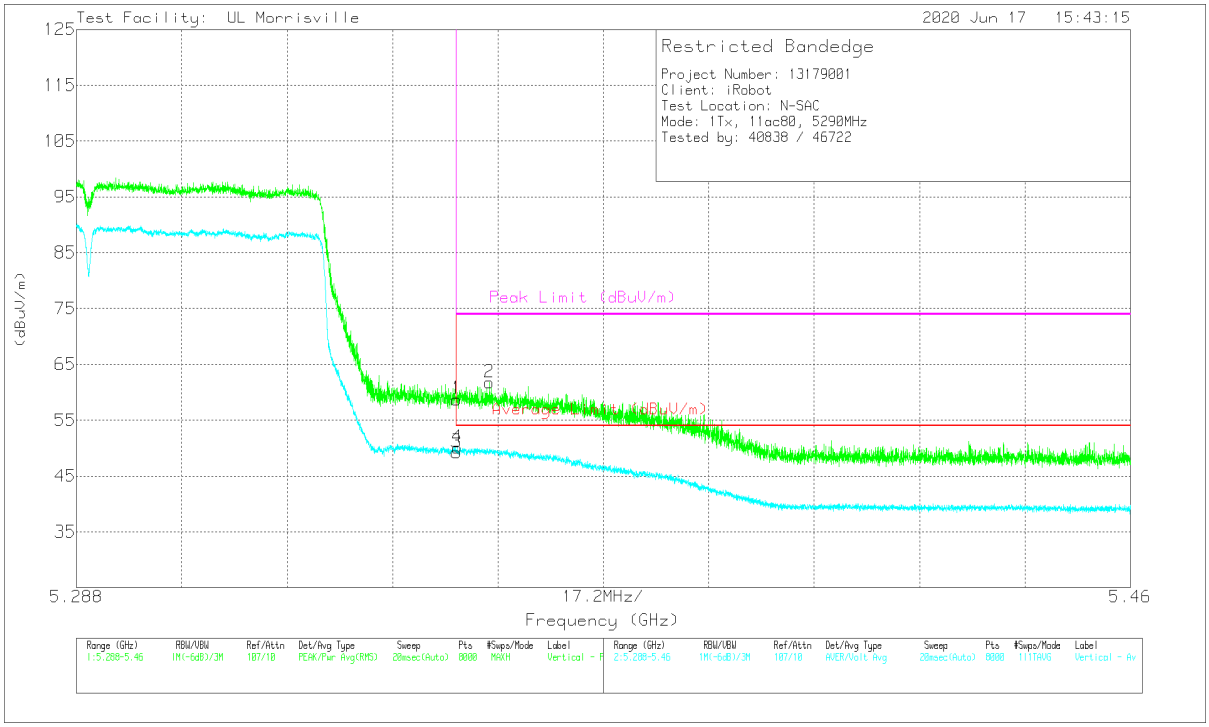

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	46.46	Pk	34.4	-22.1	0	58.76	-	-	74	-15.24	335	243	V
2	* ** 5.35541	49.47	Pk	34.4	-22.1	0	61.77	-	-	74	-12.23	335	243	V
3	* ** 5.35002	36.02	ADV	34.4	-22.1	.91	49.23	54	-4.77	-	-	335	243	V
4	* ** 5.35014	36.86	ADV	34.4	-22.1	.91	50.07	54	-3.93	-	-	335	243	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

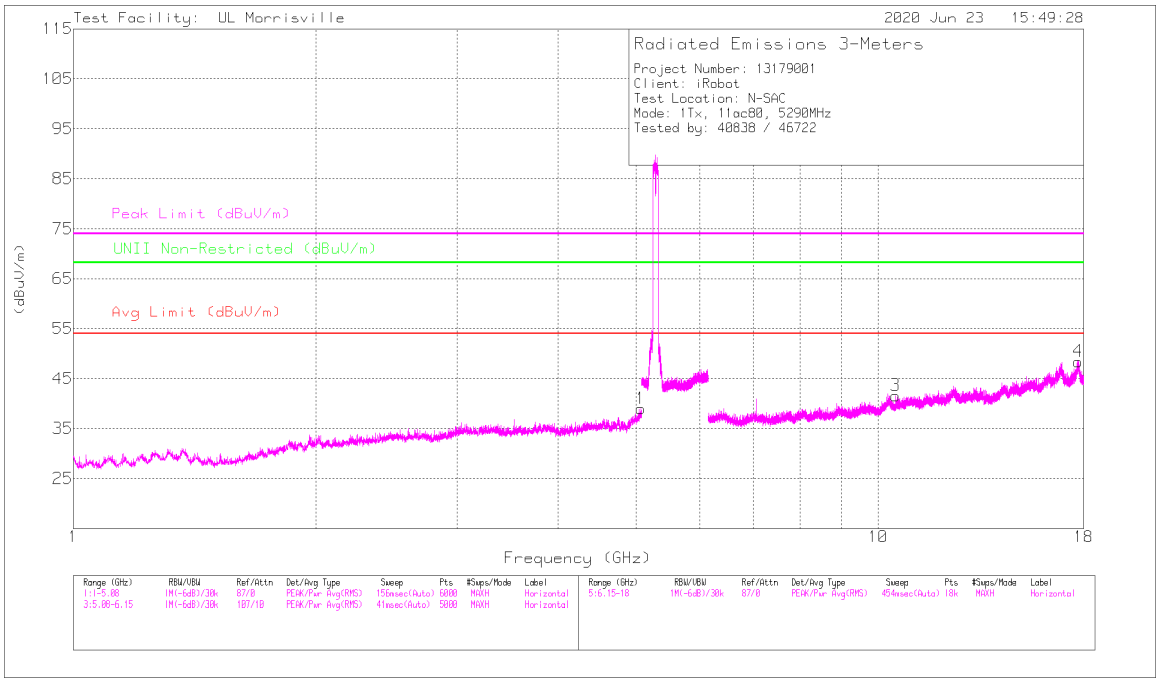

HORIZONTAL

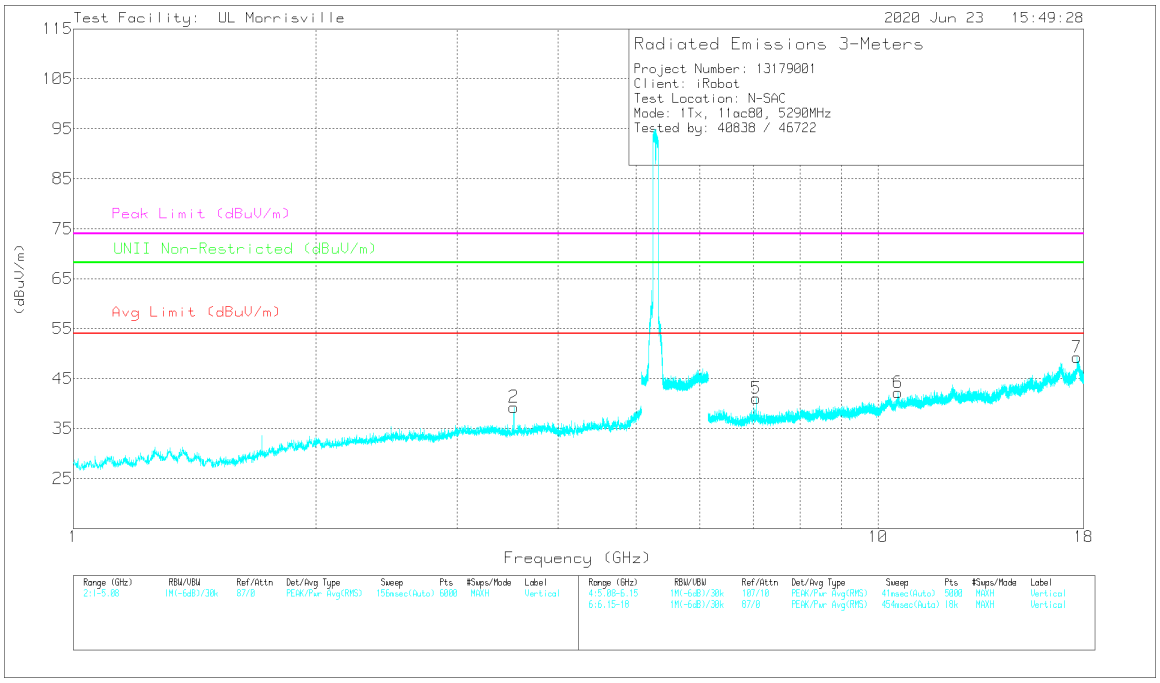

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.07604	40.25	PK-U	34.2	-29.3	0	45.15	-	-	74	-28.85	-	-	124	181	H
	* ** 5.07333	27.46	ADV	34.2	-29.5	.91	33.07	54	-20.93	-	-	-	-	124	181	H
2	* ** 3.52663	44.77	PK-U	33	-32.6	0	45.17	-	-	74	-28.83	-	-	64	264	V
	* ** 3.52662	38.07	ADV	33	-32.6	.91	39.38	54	-14.62	-	-	-	-	64	264	V
4	* ** 17.71423	33.46	PK-U	41.6	-20.2	0	54.86	-	-	74	-19.14	-	-	360	136	H
	* ** 17.71323	20.67	ADV	41.6	-20.2	.91	42.98	54	-11.02	-	-	-	-	360	136	H
5	7.0532	40.17	PK-U	35.6	-29.2	0	46.57	-	-	-	-	68.2	-21.63	292	106	V
3	10.51667	34.89	PK-U	37.6	-26.1	0	46.39	-	-	-	-	68.2	-21.81	261	298	H
6	10.57967	35.28	PK-U	37.6	-25	0	47.88	-	-	-	-	68.2	-20.32	290	302	V
7	17.67436	32.55	PK-U	41.7	-21.2	0	53.05	-	-	-	-	68.2	-15.15	253	166	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

1TX PCB Antenna MODE

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

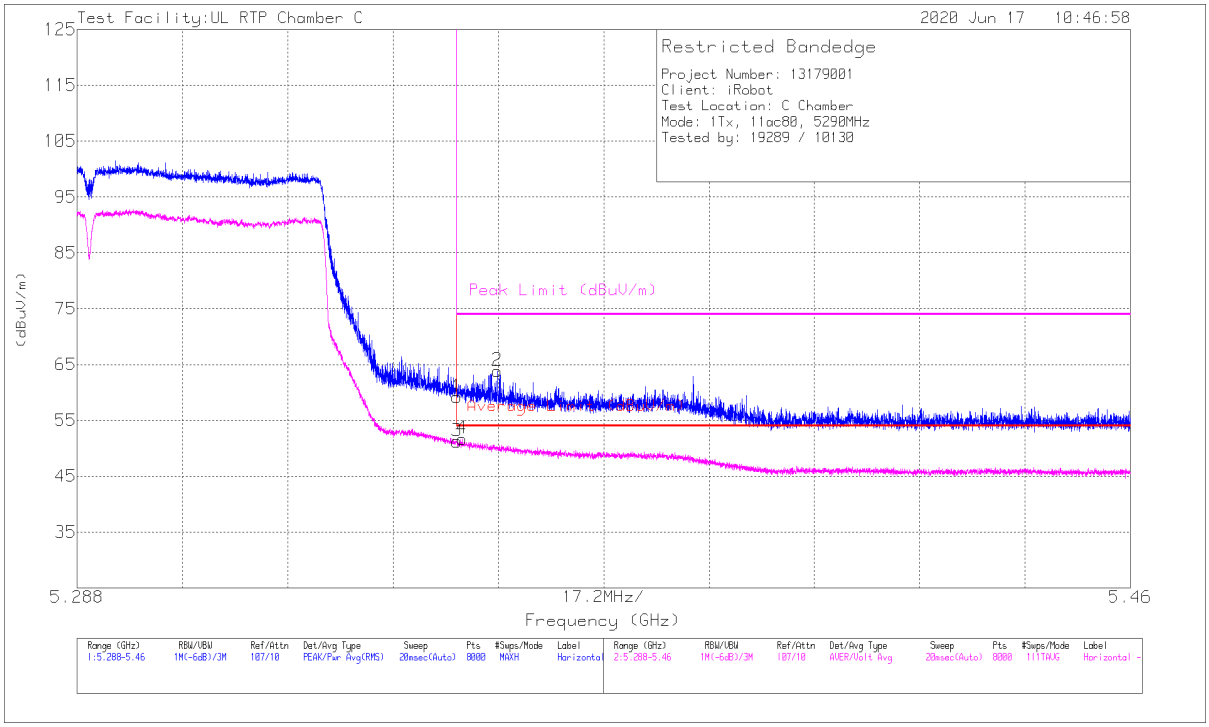

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	39.99	Pk	34.6	-15.4	0	59.19	-	-	74	-14.81	355	99	H
2	* ** 5.3566	44.56	Pk	34.6	-15.3	0	63.86	-	-	74	-10.14	355	99	H
3	* ** 5.35002	31.13	ADV	34.6	-15.4	.91	51.24	54	-2.76	-	-	355	99	H
4	* ** 5.3509	31.61	ADV	34.6	-15.4	.91	51.72	54	-2.28	-	-	355	99	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

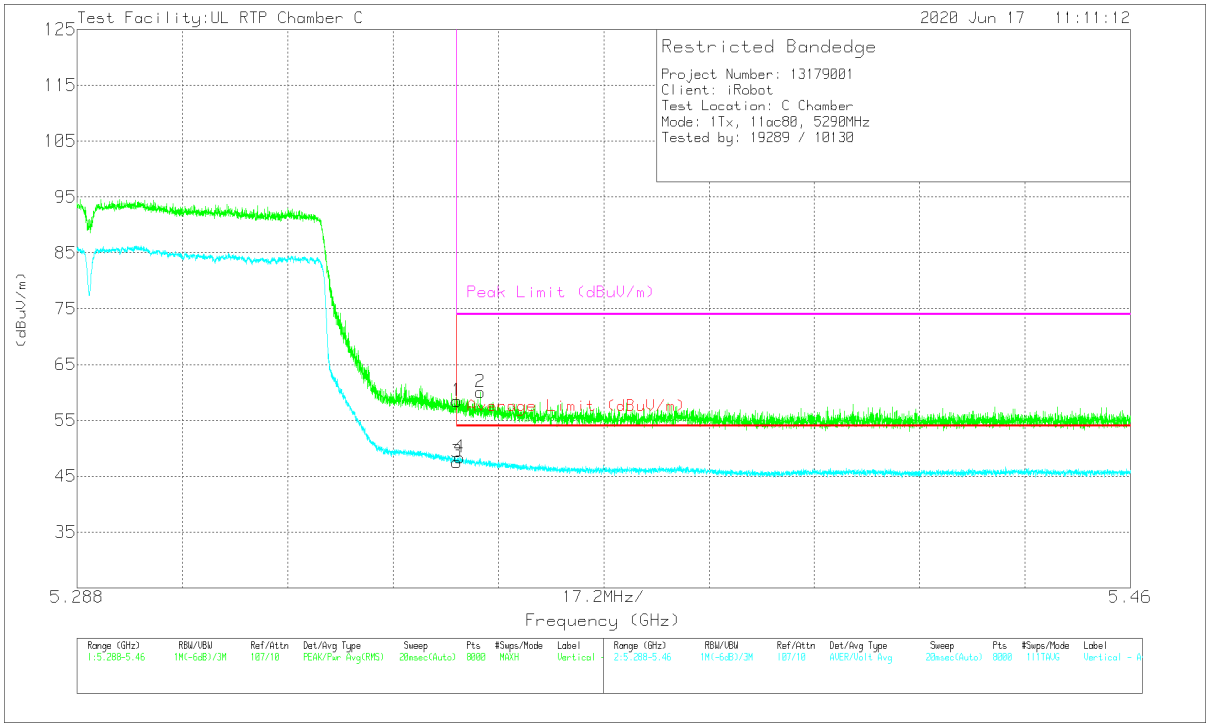

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.35002	39.27	Pk	34.6	-15.4	0	58.47	-	-	74	-15.53	113	275	V
2	* ** 5.35386	40.86	Pk	34.6	-15.4	0	60.06	-	-	74	-13.94	113	275	V
3	* ** 5.35002	27.39	ADV	34.6	-15.4	.91	47.5	54	-6.5	-	-	113	275	V
4	* ** 5.35051	28.24	ADV	34.6	-15.4	.91	48.35	54	-5.65	-	-	113	275	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

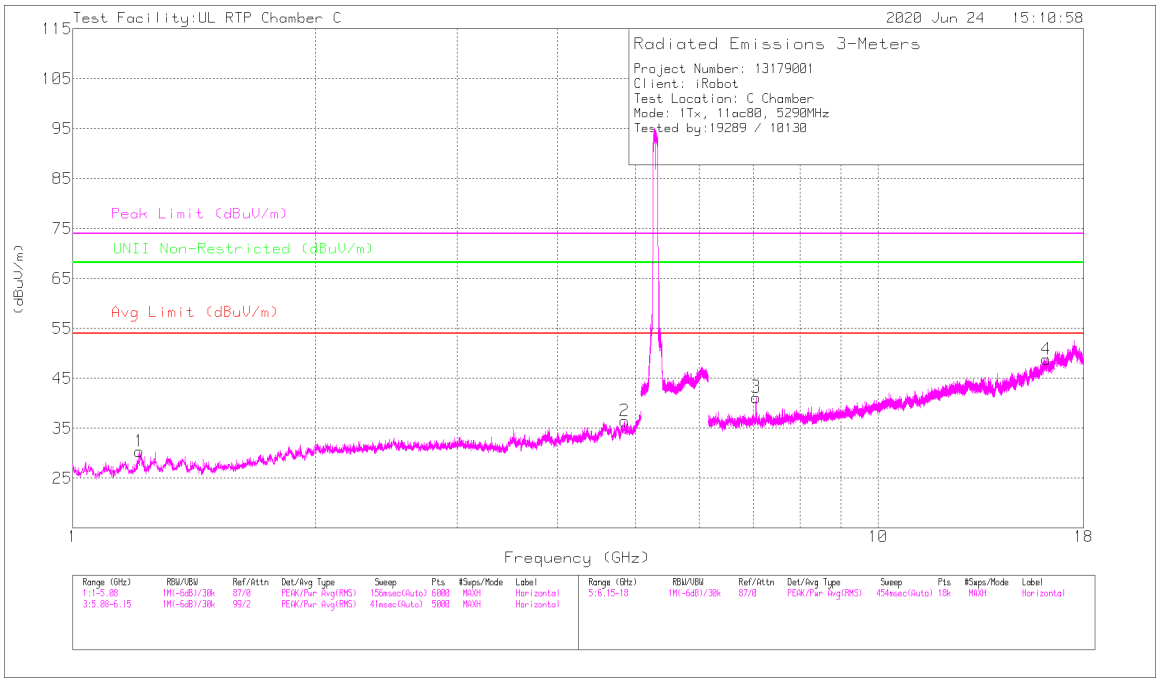

HORIZONTAL

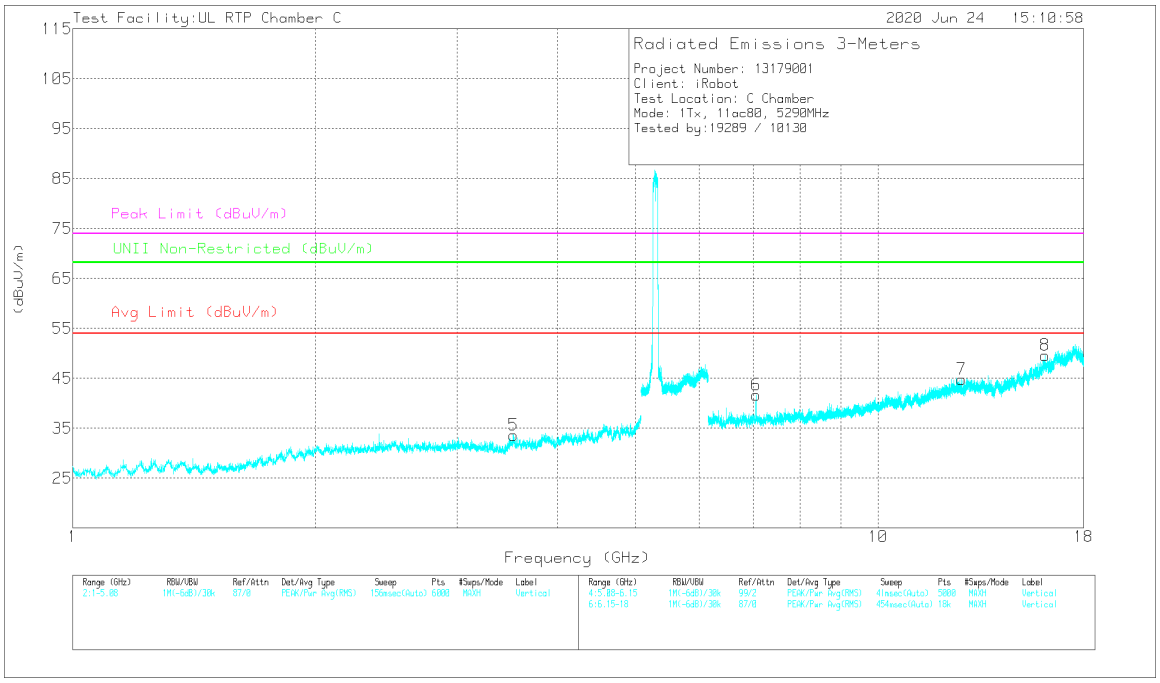

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.20931	64.6	PK-U	28.2	-55.3	0	37.5	-	-	74	-36.5	-	-	178	102	H
	* ** 1.20963	54.14	ADV	28.2	-55.3	.91	27.95	54	-26.05	-	-	-	-	178	102	H
2	* ** 4.84419	56.75	PK-U	34	-49.2	0	41.55	-	-	74	-32.45	-	-	244	102	H
	* ** 4.84363	43.78	ADV	34	-49.1	.91	29.59	54	-24.41	-	-	-	-	244	102	H
5	* ** 3.52706	55.79	PK-U	33.6	-49.5	0	39.89	-	-	74	-34.11	-	-	29	110	V
	* ** 3.52681	42.74	ADV	33.6	-49.5	.91	27.75	54	-26.25	-	-	-	-	29	110	V
4	* ** 16.18175	51.6	PK-U	41.3	-37.5	0	55.4	-	-	74	-18.6	-	-	193	203	H
	* ** 16.18169	38.53	ADV	41.3	-37.5	.91	43.24	54	-10.76	-	-	-	-	193	203	H
7	* ** 12.69393	51.63	PK-U	39.3	-40	0	50.93	-	-	74	-23.07	-	-	329	229	V
	* ** 12.69375	38.52	ADV	39.3	-40	.91	38.73	54	-15.27	-	-	-	-	329	229	V
8	* ** 16.1371	51.5	PK-U	41.3	-37.9	0	54.9	-	-	74	-19.1	-	-	298	106	V
	* ** 16.13703	38.67	ADV	41.3	-37.9	.91	42.98	54	-11.02	-	-	-	-	298	106	V
6	7.05328	58.48	PK-U	35.7	-46.6	0	47.58	-	-	-	-	68.2	-20.62	295	102	V
3	7.05331	58.02	PK-U	35.7	-46.6	0	47.12	-	-	-	-	68.2	-21.08	160	102	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

10.1.9. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

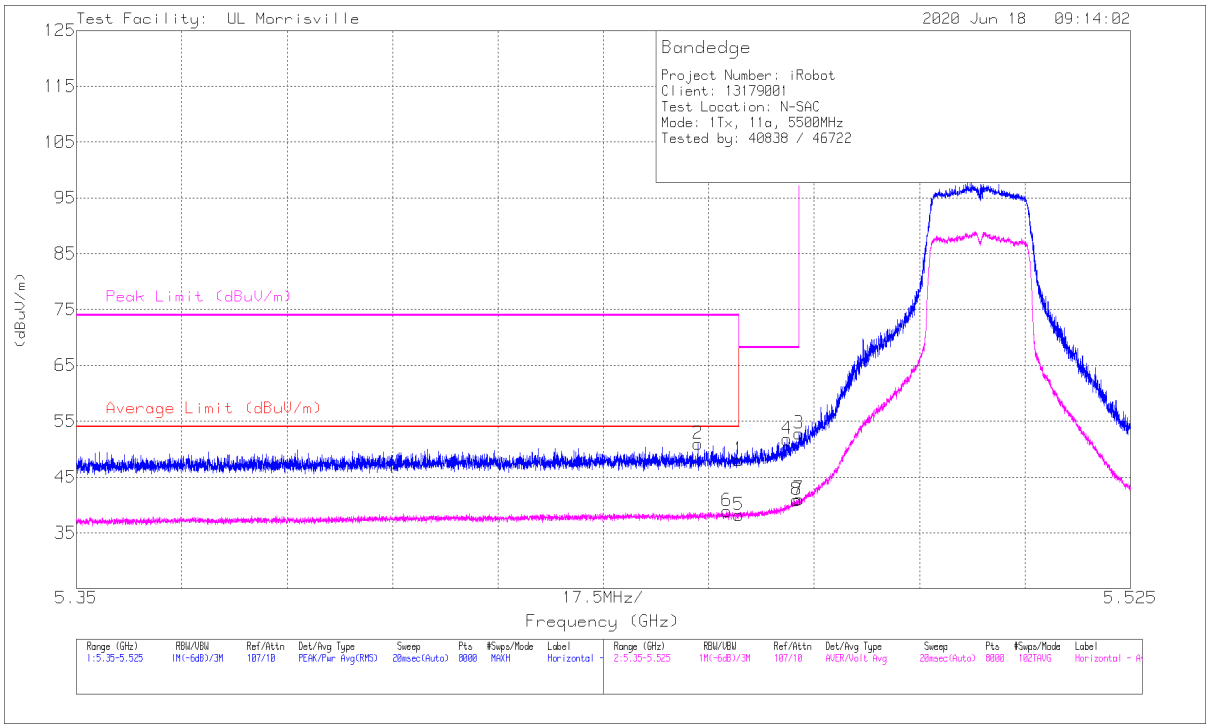

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	35.67	Pk	34.4	-22	0	48.07	-	-	74	-25.93	5	368	H
2	* ** 5.4532	38.65	Pk	34.3	-22	0	50.95	-	-	74	-23.05	5	368	H
5	* ** 5.45998	25.55	ADV	34.4	-22	.23	38.18	54	-15.82	-	-	5	368	H
6	* ** 5.45795	26.29	ADV	34.4	-22	.23	38.92	54	-15.08	-	-	5	368	H
4	5.46794	39.37	Pk	34.4	-22	0	51.77	-	-	68.2	-16.43	5	368	H
8	5.46959	28.24	ADV	34.4	-22	.23	40.87	-	-	-	-	5	368	H
3	5.46998	40.29	Pk	34.4	-21.9	0	52.79	-	-	68.2	-15.41	5	368	H
7	5.46998	28.32	ADV	34.4	-21.9	.23	41.05	-	-	-	-	5	368	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

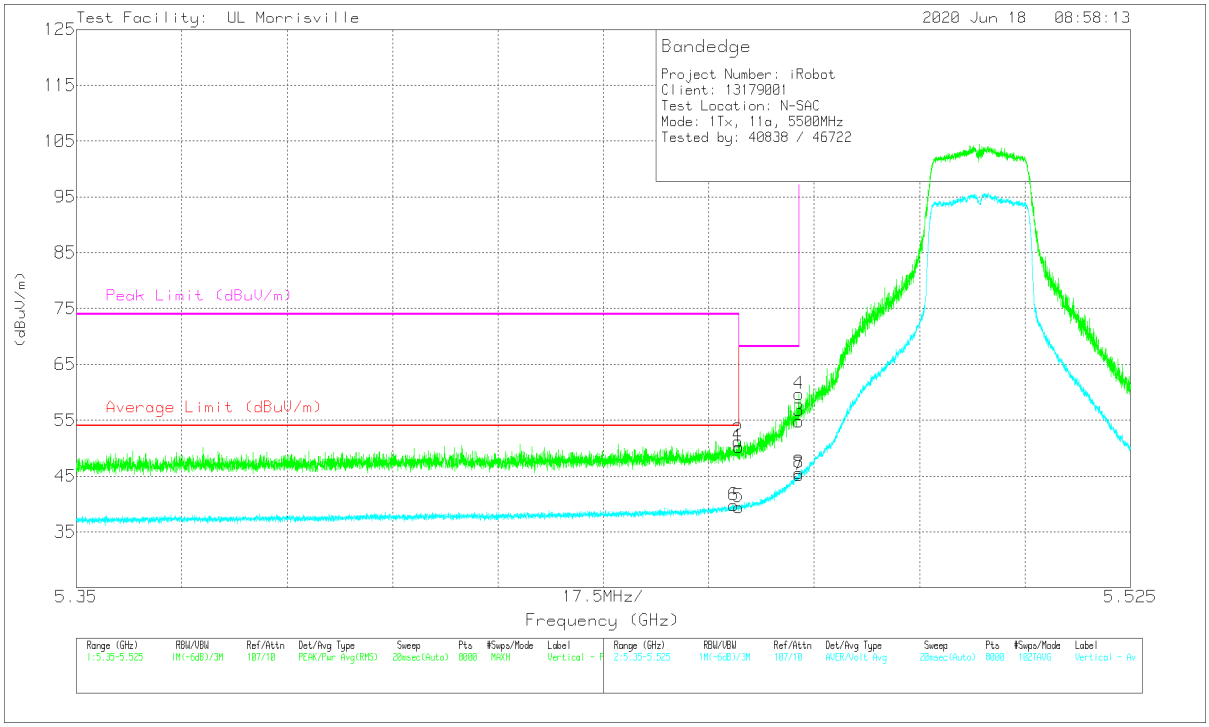

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.82	Pk	34.4	-22	0	50.22	-	-	74	-23.78	96	112	V
2	* ** 5.45989	38.84	Pk	34.4	-22	0	51.24	-	-	74	-22.76	96	112	V
5	* ** 5.45998	26.81	ADV	34.4	-22	.23	39.44	54	-14.56	-	-	96	112	V
6	* ** 5.45913	27.12	ADV	34.4	-22	.23	39.75	54	-14.25	-	-	96	112	V
4	5.46991	47.28	Pk	34.4	-22	0	59.68	-	-	68.2	-8.52	96	112	V
8	5.46996	32.84	ADV	34.4	-21.9	.23	45.57	-	-	-	-	96	112	V
3	5.46998	42.34	Pk	34.4	-21.9	0	54.84	-	-	68.2	-13.36	96	112	V
7	5.46998	32.41	ADV	34.4	-21.9	.23	45.14	-	-	-	-	96	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

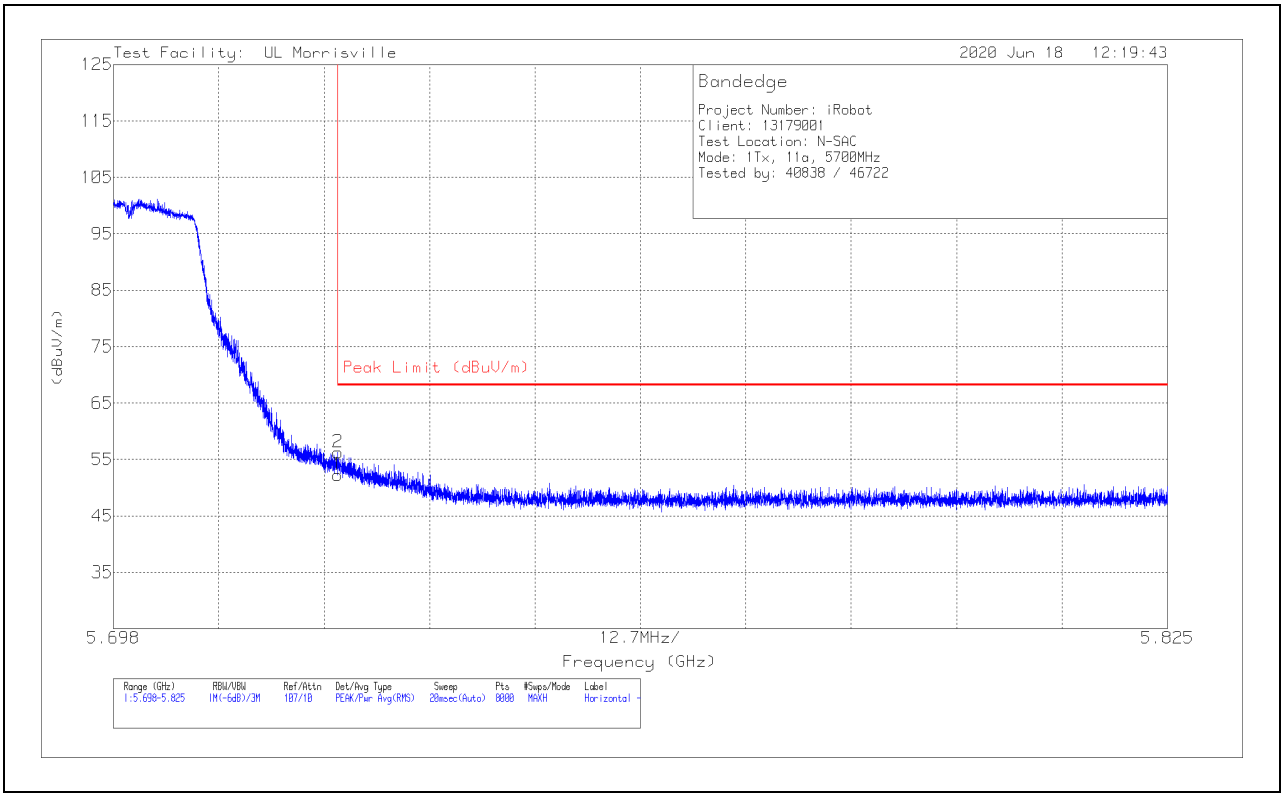

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.46	Pk	34.6	-21.8	0	52.26	68.2	-15.94	44	355	H
2	5.72505	43.48	Pk	34.6	-21.8	0	56.28	68.2	-11.92	44	355	H

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

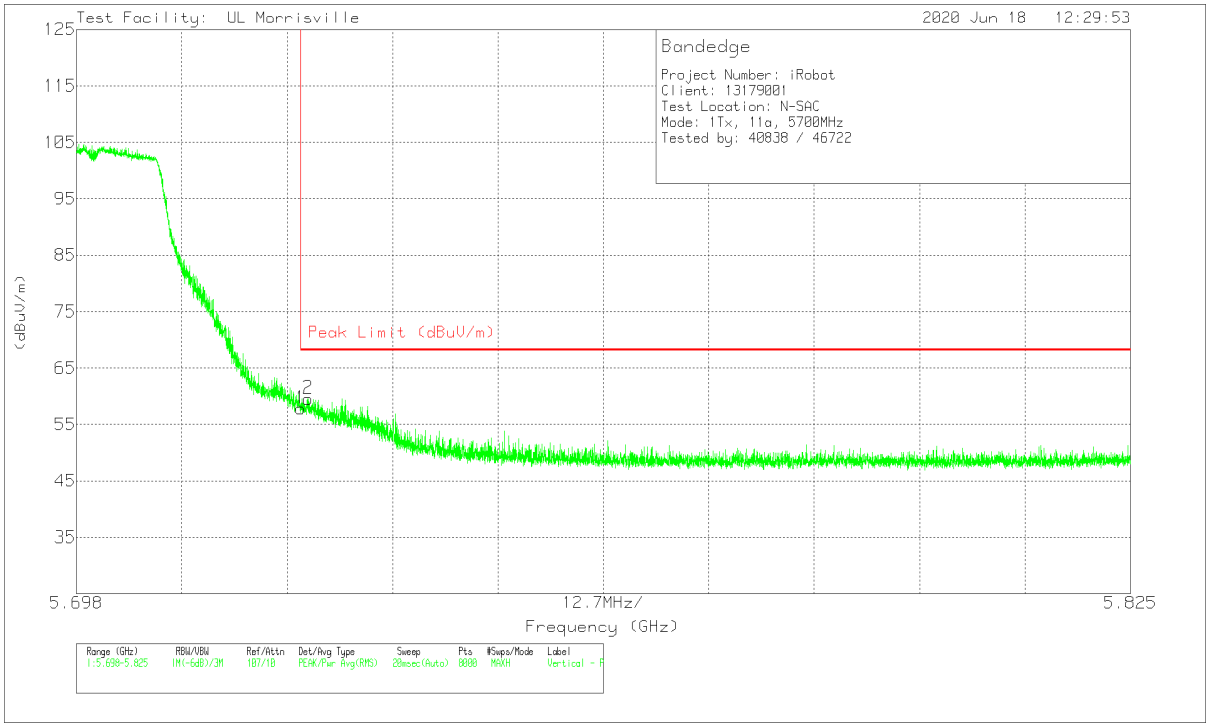

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	45.04	Pk	34.6	-21.8	0	57.84	68.2	-10.36	328	98	V
2	5.7259	46.79	Pk	34.6	-21.8	0	59.59	68.2	-8.61	328	98	V

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

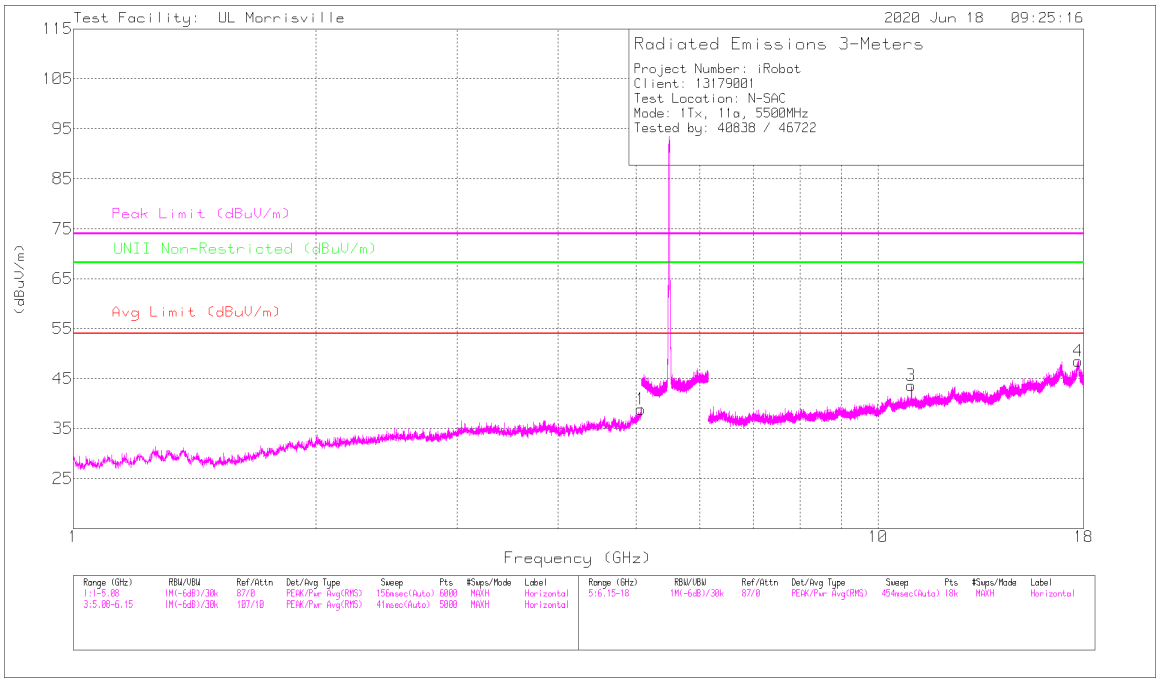

HORIZONTAL

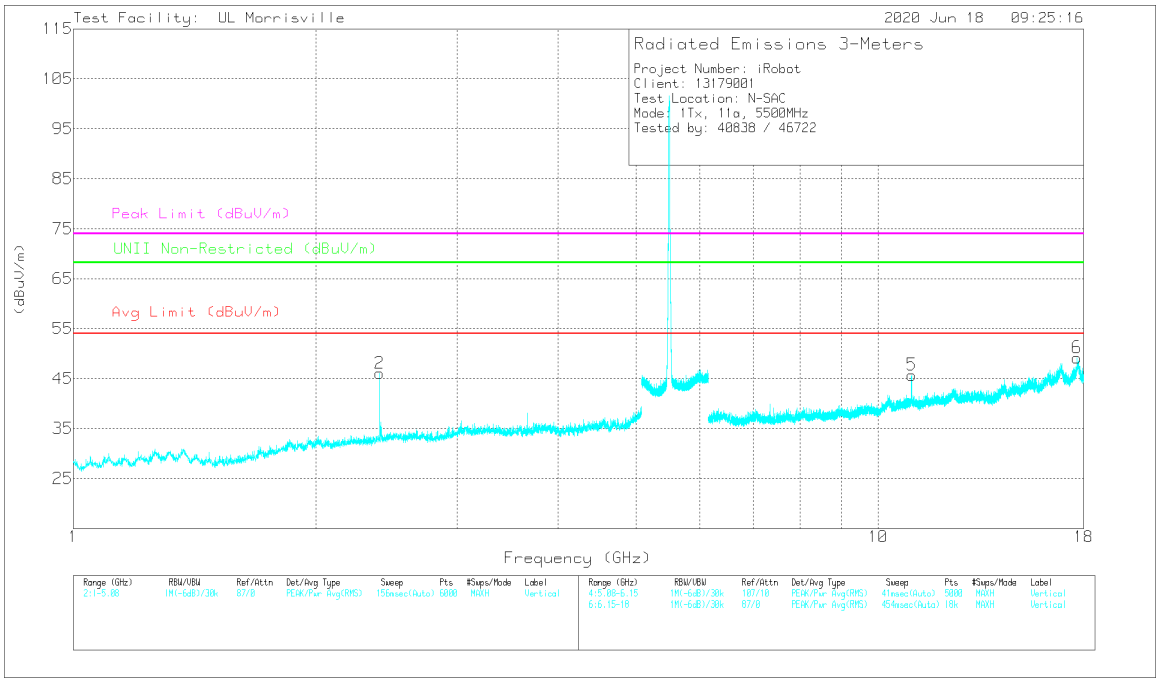

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.07542	40.62	PK-U	34.2	-29.4	0	45.42	-	-	74	-28.58	-	-	307	244	H
	* ** 5.07343	27.49	ADV	34.2	-29.5	.23	32.42	54	-21.58	-	-	-	-	307	244	H
3	* ** 10.99857	37.52	PK-U	37.9	-24.9	0	50.52	-	-	74	-23.48	-	-	5	109	H
	* ** 10.99873	24.55	ADV	37.9	-24.9	.23	37.78	54	-16.22	-	-	-	-	5	109	H
4	* ** 17.73126	32.9	PK-U	41.6	-19.7	0	54.8	-	-	74	-19.2	-	-	9	144	H
	* ** 17.73263	20.43	ADV	41.7	-19.7	.23	42.66	54	-11.34	-	-	-	-	9	144	H
5	* ** 11.00292	39.05	PK-U	37.9	-25	0	51.95	-	-	74	-22.05	-	-	241	210	V
	* ** 11.00294	26.06	ADV	37.9	-25	.23	39.19	54	-14.81	-	-	-	-	241	210	V
2	2.40184	50.82	PK-U	31.9	-33.6	0	49.12	-	-	-	-	68.2	-19.08	165	131	V
6	17.66532	34.54	PK-U	41.7	-21.6	0	54.64	-	-	-	-	68.2	-13.56	8	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

MID CHANNEL RESULTS

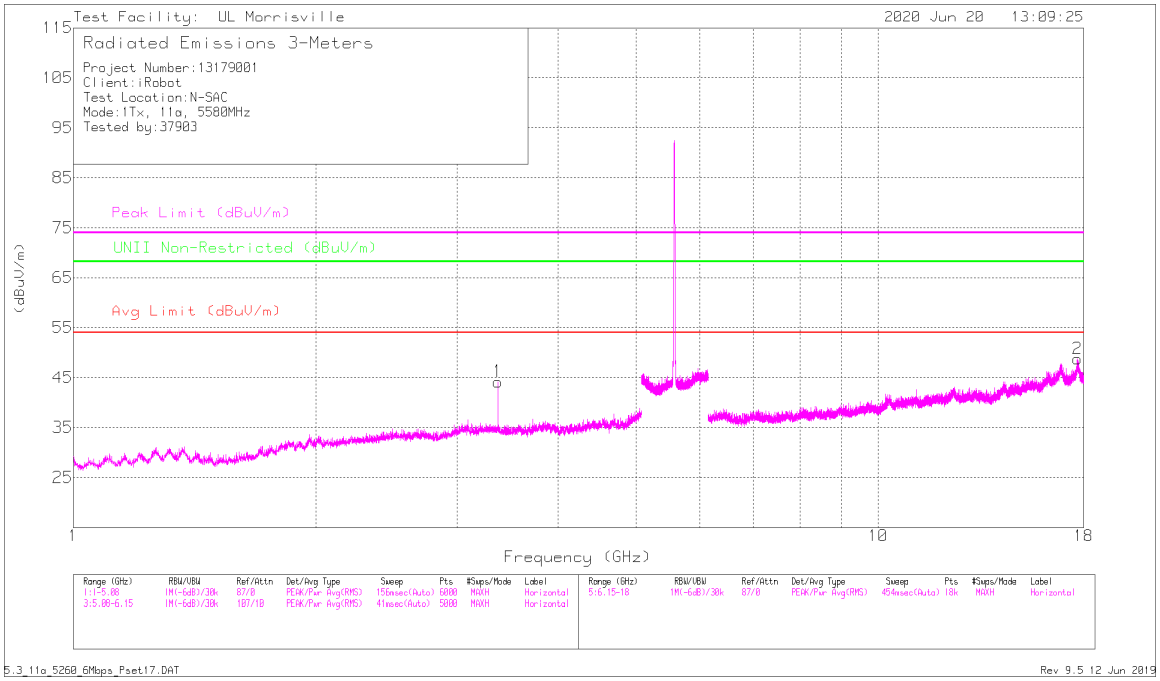

HORIZONTAL

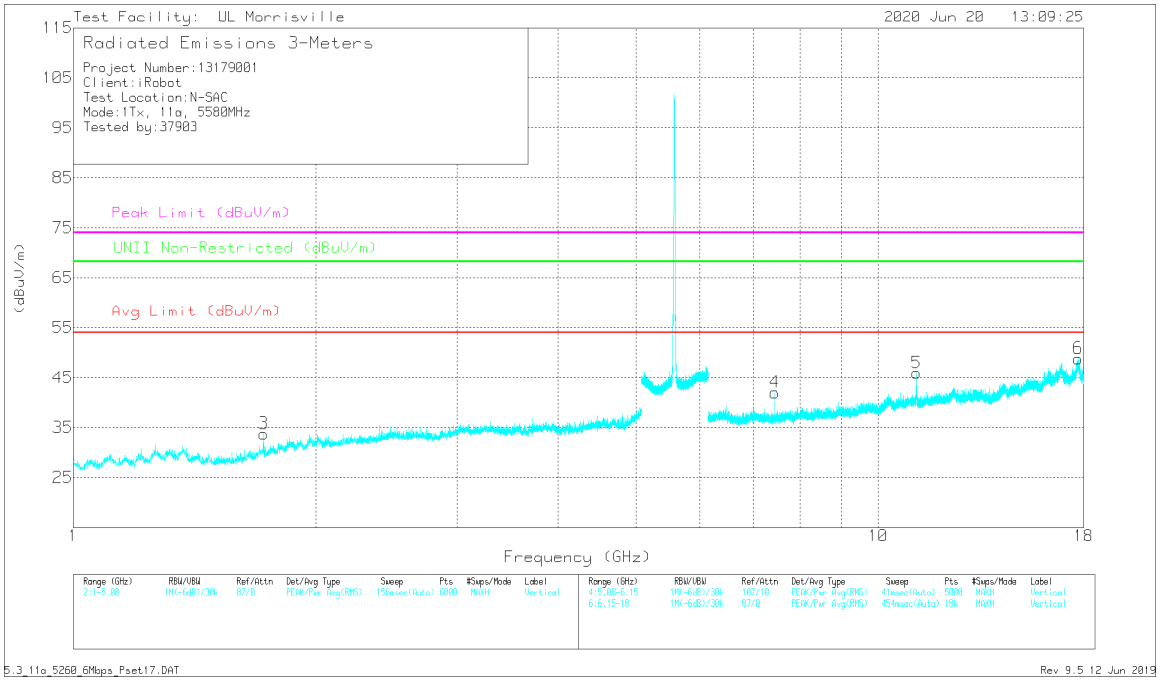

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	** 1.72493	48.65	PK-U	29.4	-34.9	0	43.15	-	-	74	-30.85	68.2	-25.05	41	212	V
	** 1.72433	29.87	ADV	29.5	-34.9	.23	24.70	54	-29.3	-	-	-	-	41	212	V
4	* ** 7.43999	39.87	PK-U	35.7	-28.7	0	46.87	-	-	74	-27.13	-	-	213	102	V
	* ** 7.43998	31.73	ADV	35.7	-28.7	.23	38.96	54	-15.04	-	-	-	-	213	102	V
5	* ** 11.16038	40.25	PK-U	37.9	-25.5	0	52.65	-	-	74	-21.35	-	-	294	218	V
	* ** 11.16028	26.07	ADV	37.9	-25.5	.23	38.70	54	-15.30	-	-	-	-	294	218	V
6	* ** 17.71879	34.12	PK-U	41.6	-20	0	55.72	-	-	74	-18.28	-	-	238	120	V
	* ** 17.71849	20.65	ADV	41.6	-20	.23	42.48	54	-11.52	-	-	-	-	238	120	V
1	3.37227	41.96	PK-U	33.1	-32.1	0	42.96	-	-	-	-	68.2	-25.24	258	380	H
2	17.6844	34.41	PK-U	41.7	-21	0	55.11	-	-	-	-	68.2	-13.09	108	181	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

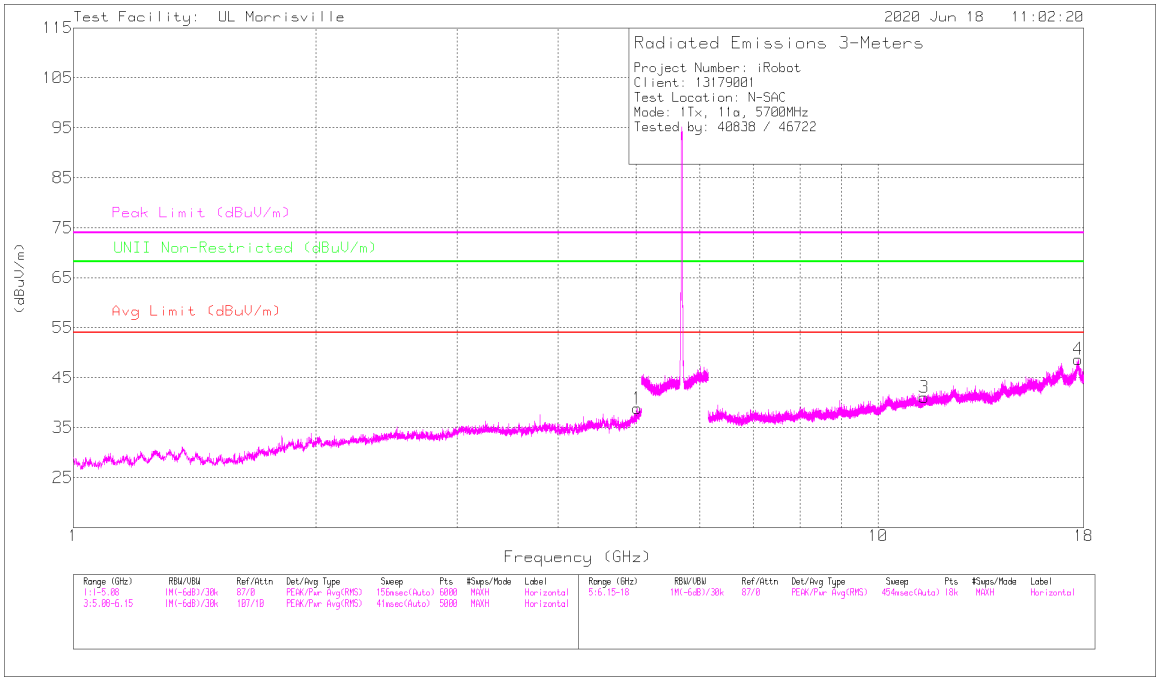

HORIZONTAL

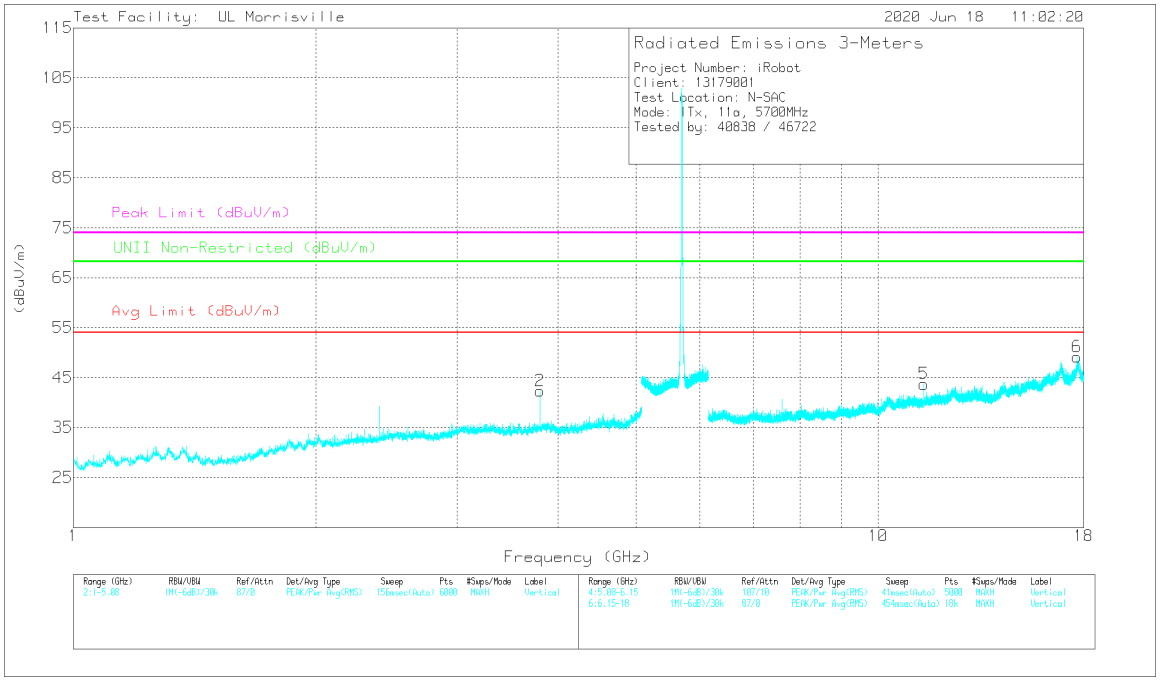

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.0161	39.98	PK-U	34.2	-30.3	0	43.88	-	-	74	-30.12	-	-	11	315	H
	* ** 5.01736	27.7	ADV	34.2	-30.3	.23	31.83	54	-22.17	-	-	-	-	11	315	H
2	* ** 3.80018	44.08	PK-U	33.6	-32.3	0	45.38	-	-	74	-28.62	-	-	54	106	V
	* ** 3.80003	36.75	ADV	33.6	-32.3	.23	38.28	54	-15.72	-	-	-	-	54	106	V
3	* ** 11.40706	36	PK-U	38.1	-25.4	0	48.7	-	-	74	-25.3	-	-	289	114	H
	* ** 11.40501	23.22	ADV	38.1	-25.4	.23	36.15	54	-17.85	-	-	-	-	289	114	H
4	* ** 17.72567	34.02	PK-U	41.7	-19.8	0	55.92	-	-	74	-18.08	-	-	95	393	H
	* ** 17.72613	20.89	ADV	41.7	-19.8	.23	43.02	54	-10.98	-	-	-	-	95	393	H
5	* ** 11.39957	36.51	PK-U	38.1	-25.5	0	49.11	-	-	74	-24.89	-	-	2	337	V
	* ** 11.39998	26.59	ADV	38.1	-25.5	.23	39.42	54	-14.58	-	-	-	-	2	337	V
6	17.67214	34.25	PK-U	41.7	-21.3	0	54.65	-	-	-	-	68.2	-13.55	178	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

CHANNEL 144 RESULTS

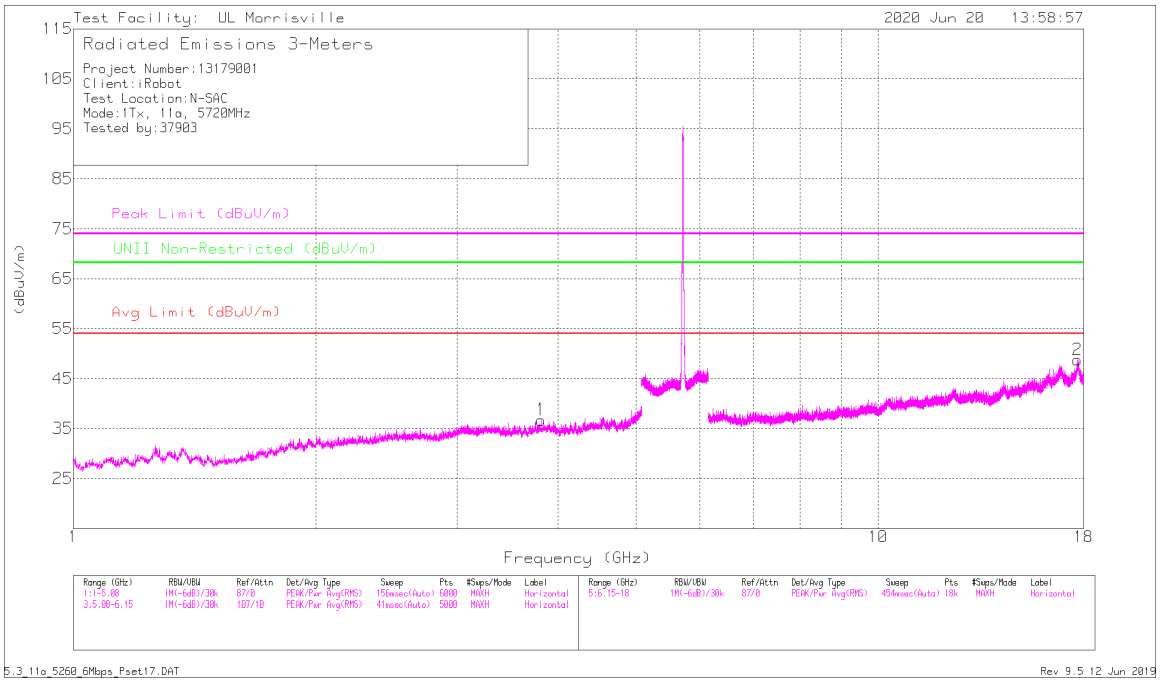

HORIZONTAL

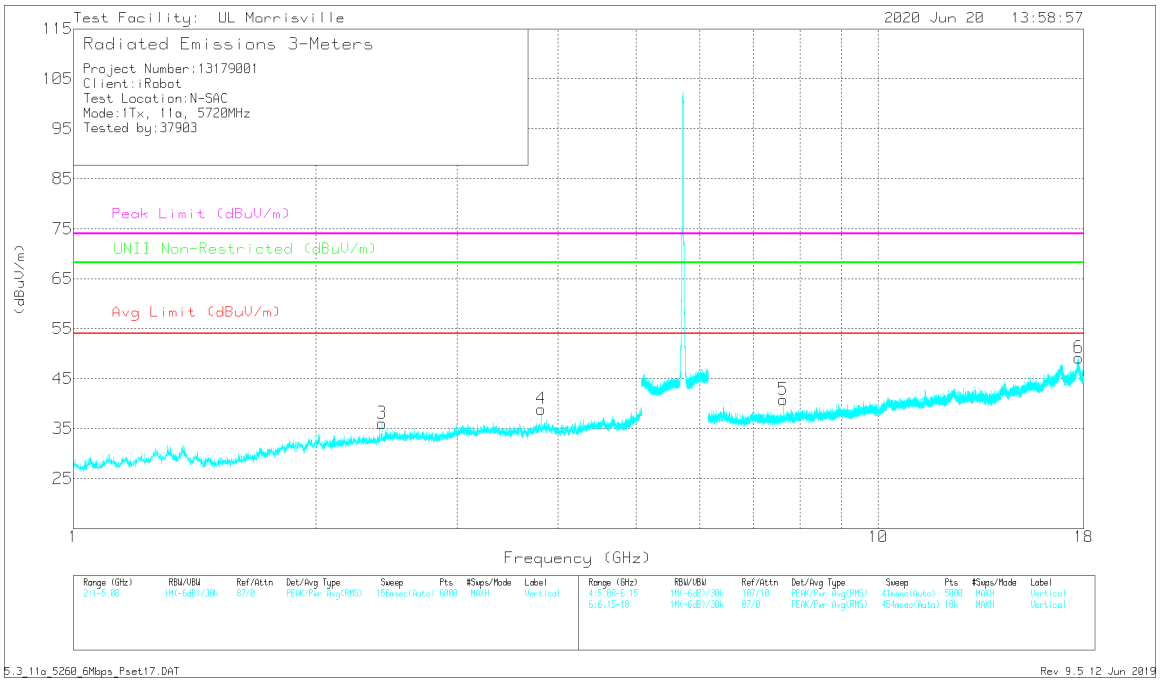

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.81334	43.17	PK-U	33.6	-32.1	0	44.67	-	-	74	-29.33	-	-	77	131	H
	* ** 3.81338	31.5	ADV	33.6	-32.1	.23	33.23	54	-20.77	-	-	-	-	77	131	H
4	* ** 3.8131	44.32	PK-U	33.6	-32.1	0	45.82	-	-	74	-28.18	-	-	40	102	V
	* ** 3.81331	36	ADV	33.6	-32.1	.23	37.73	54	-16.27	-	-	-	-	40	102	V
5	* ** 7.62651	40.06	PK-U	35.8	-28.6	0	47.26	-	-	74	-26.74	-	-	198	102	V
	* ** 7.62671	31.19	ADV	35.8	-28.6	.23	38.62	54	-15.38	-	-	-	-	198	102	V
6	* ** 17.74165	33.3	PK-U	41.7	-19.8	0	55.2	-	-	74	-18.8	-	-	17	233	V
	* ** 17.74144	20.3	ADV	41.7	-19.8	.23	42.43	54	-11.57	-	-	-	-	17	233	V
3	2.41864	44.67	PK-U	31.9	-33.5	0	43.07	-	-	-	-	68.2	-25.13	10	207	V
2	17.69263	34.31	PK-U	41.7	-20.7	0	55.31	-	-	-	-	68.2	-12.89	94	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

1TX PCB Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

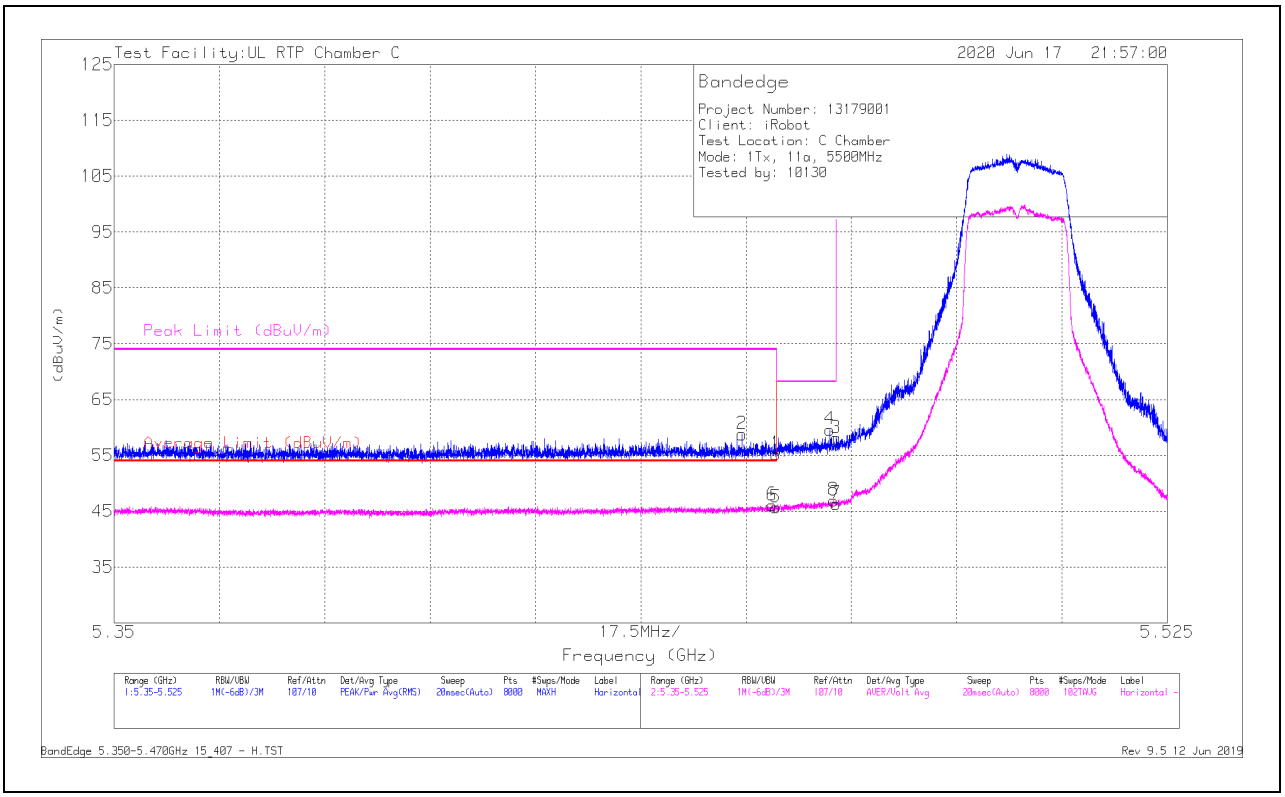

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	36.24	Pk	34.6	-15.6	0	55.24	-	-	74	-18.76	85	148	H
2	* ** 5.45431	39.8	Pk	34.6	-15.6	0	58.8	-	-	74	-15.2	85	148	H
5	* ** 5.45998	26.46	ADV	34.6	-15.6	.23	45.69	54	-8.31	-	-	85	148	H
6	* ** 5.4593	26.83	ADV	34.6	-15.6	.23	46.06	54	-7.94	-	-	85	148	H
4	5.46895	40.43	Pk	34.6	-15.4	0	59.63	-	-	68.2	-8.57	85	148	H
8	5.46952	27.52	ADV	34.6	-15.4	.23	46.95	-	-	-	-	85	148	H
3	5.46998	38.88	Pk	34.6	-15.4	0	58.08	-	-	68.2	-10.12	85	148	H
7	5.46998	26.93	ADV	34.6	-15.4	.23	46.36	-	-	-	-	85	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

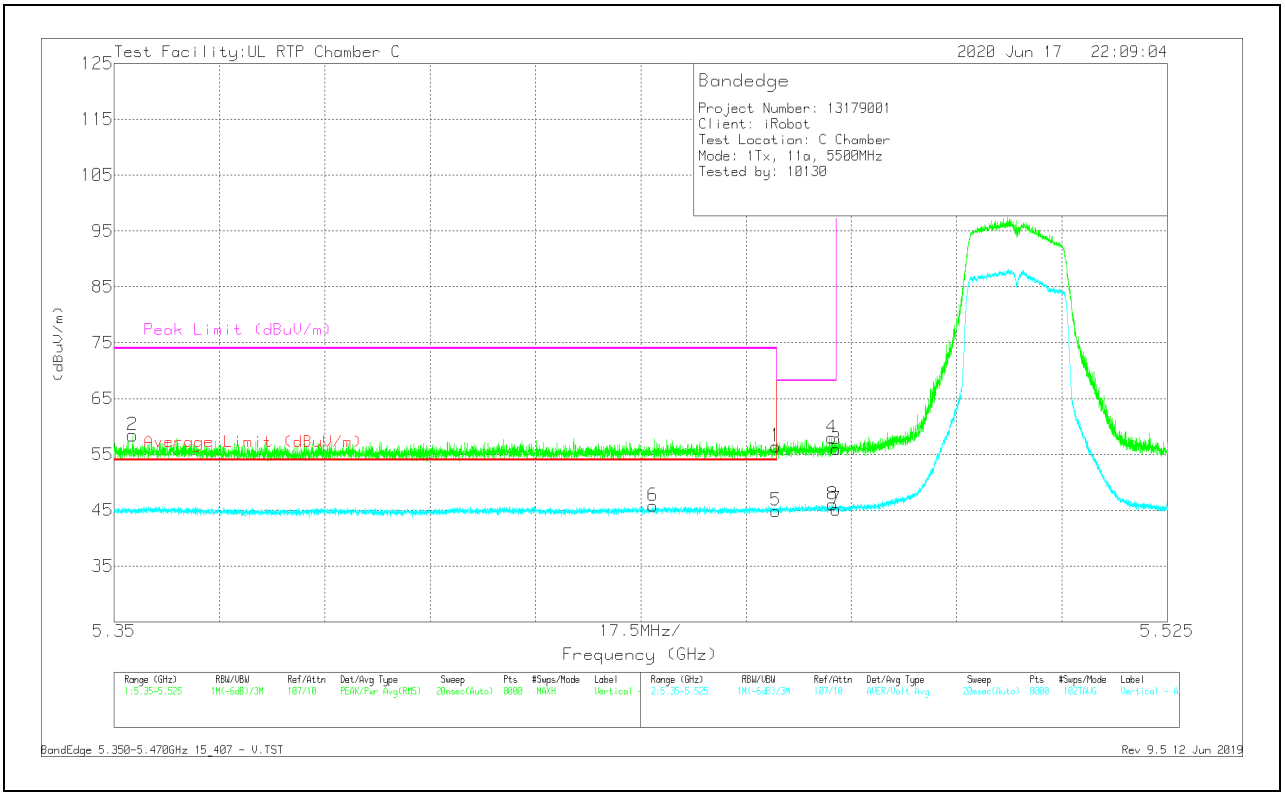

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.44	Pk	34.6	-15.6	0	56.44	-	-	74	-17.56	118	357	V
2	* ** 5.35306	39.24	Pk	34.6	-15.4	0	58.44	-	-	74	-15.56	118	357	V
5	* ** 5.45998	25.67	ADV	34.6	-15.6	.23	44.9	54	-9.1	-	-	118	357	V
6	* ** 5.43948	26.37	ADV	34.6	-15.4	.23	45.8	54	-8.2	-	-	118	357	V
4	5.46926	38.77	Pk	34.6	-15.4	0	57.97	-	-	68.2	-10.23	118	357	V
8	5.46939	26.6	ADV	34.6	-15.4	.23	46.03	-	-	-	-	118	357	V
3	5.46998	36.71	Pk	34.6	-15.4	0	55.91	-	-	68.2	-12.29	118	357	V
7	5.46998	25.74	ADV	34.6	-15.4	.23	45.17	-	-	-	-	118	357	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

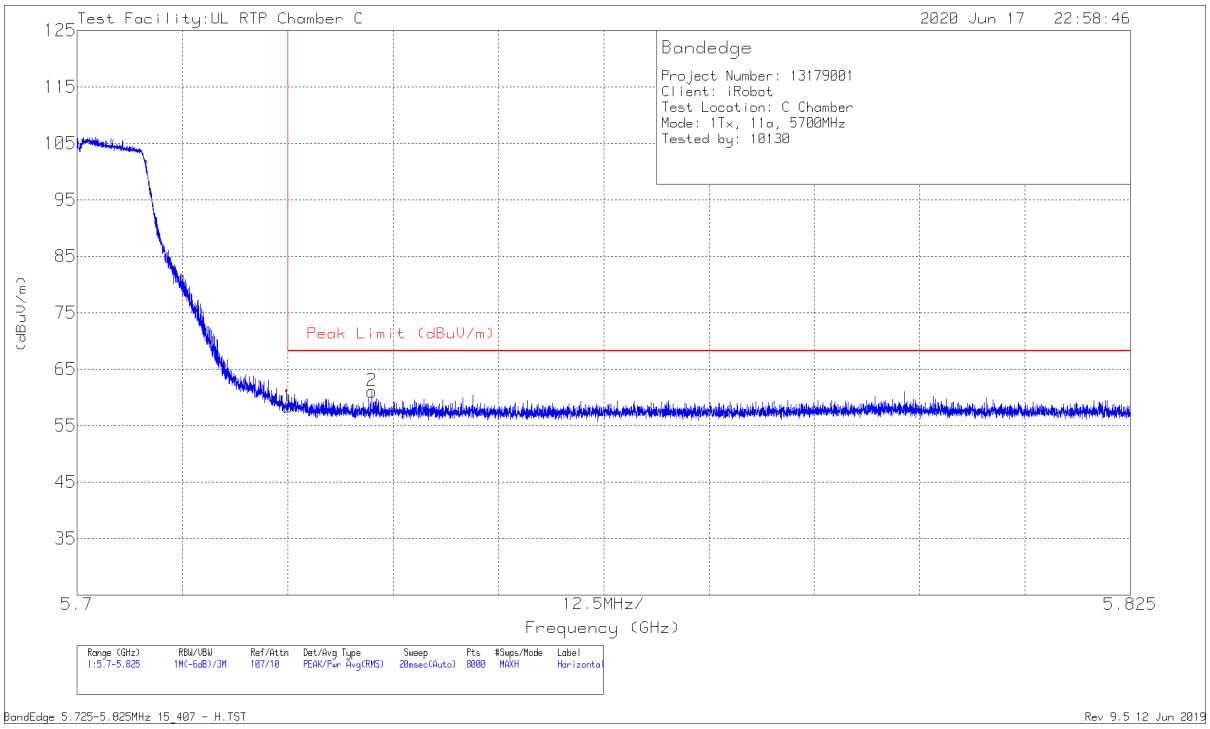

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.55	Pk	34.6	-14.8	0	58.35	68.2	-9.85	126	132	H
2	5.73497	40.99	Pk	34.7	-14.6	0	61.09	68.2	-7.11	126	132	H

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

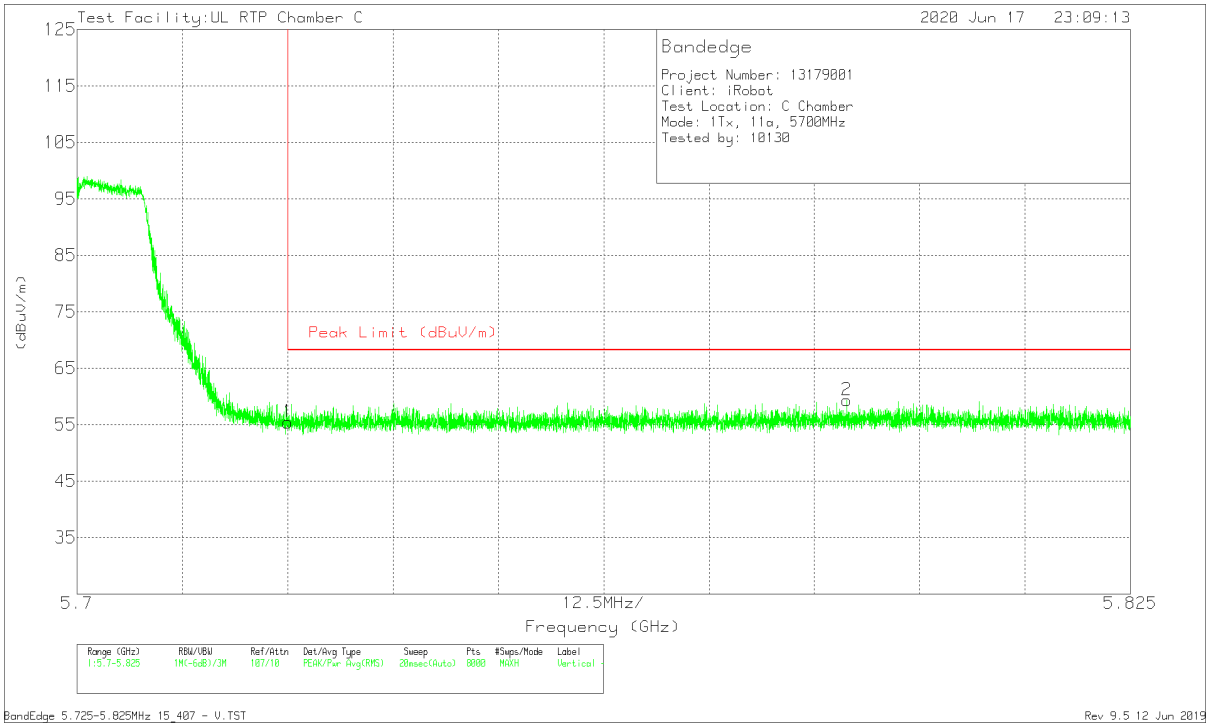

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.62	Pk	34.6	-14.8	55.42	68.2	-12.78	198	284	V
2	5.79132	38.92	Pk	34.8	-14.4	59.32	68.2	-8.88	198	284	V

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

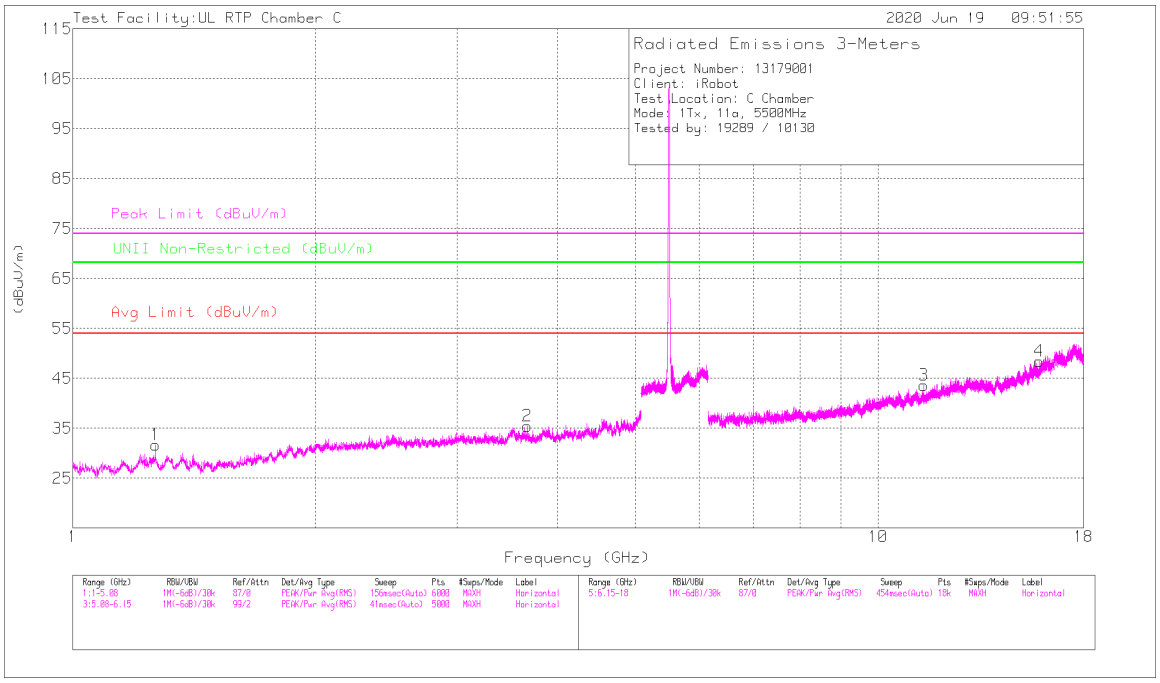

HORIZONTAL

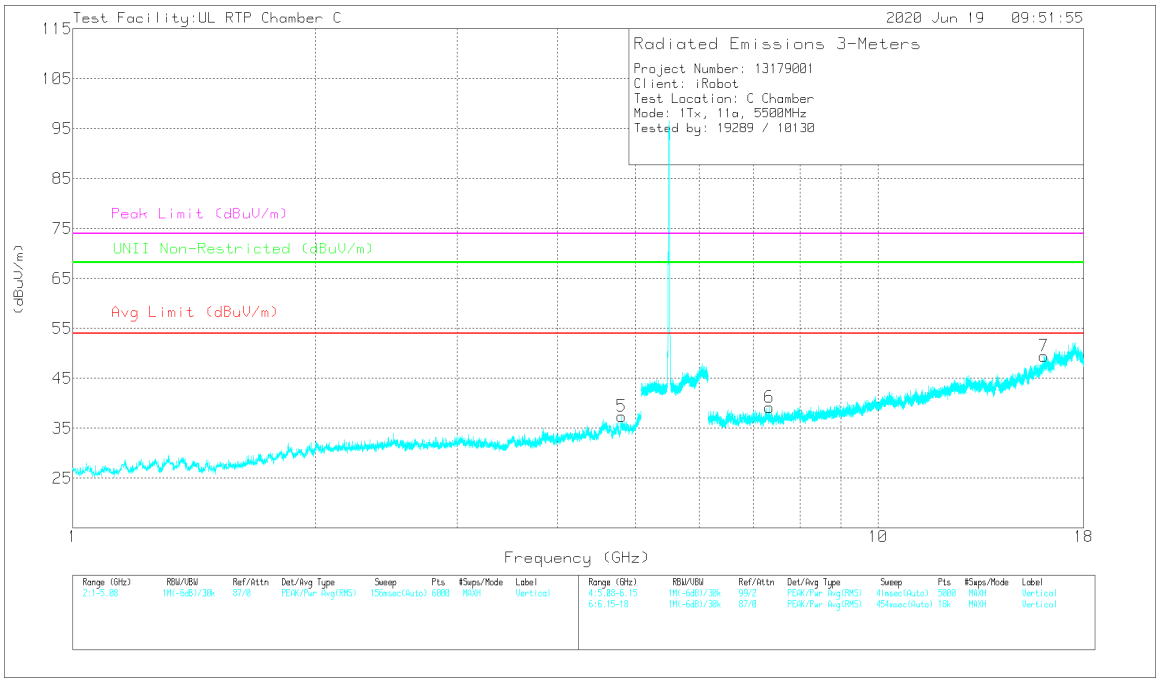

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.26708	64.33	PK-U	28.5	-55.3	0	37.53	-	-	74	-36.47	-	-	220	102	H
	* 1.2672	53.87	ADV	28.5	-55.3	.23	27.3	54	-26.7	-	-	-	-	220	102	H
2	* ** 3.66666	56.69	PK-U	33.2	-49.5	0	40.39	-	-	74	-33.61	-	-	159	102	H
	* ** 3.66663	46.03	ADV	33.2	-49.5	.23	29.96	54	-24.04	-	-	-	-	159	102	H
5	* ** 4.80721	56.33	PK-U	34.1	-48.8	0	41.63	-	-	74	-32.37	-	-	322	102	V
	* ** 4.80712	43.48	ADV	34.1	-48.8	.23	29.01	54	-24.99	-	-	-	-	322	102	V
3	* ** 11.40705	52.14	PK-U	38	-42	0	48.14	-	-	74	-25.86	-	-	268	102	H
	* ** 11.40752	39.36	ADV	38	-42	.23	35.59	54	-18.41	-	-	-	-	268	102	H
4	* ** 15.85507	50.52	PK-U	40.9	-37.5	0	53.92	-	-	74	-20.08	-	-	40	118	H
	* ** 15.85708	37.87	ADV	40.9	-37.6	.23	41.4	54	-12.6	-	-	-	-	40	118	H
6	* ** 7.3332	57.46	PK-U	35.7	-47.3	0	45.86	-	-	74	-28.14	-	-	145	103	V
	* ** 7.33334	46.65	ADV	35.7	-47.3	.23	35.28	54	-18.72	-	-	-	-	145	103	V
7	* ** 16.08205	51.14	PK-U	41.3	-36.8	0	55.64	-	-	74	-18.36	-	-	342	283	V
	* ** 16.08382	37.93	ADV	41.3	-36.8	.23	42.66	54	-11.34	-	-	-	-	342	283	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

MID CHANNEL RESULTS

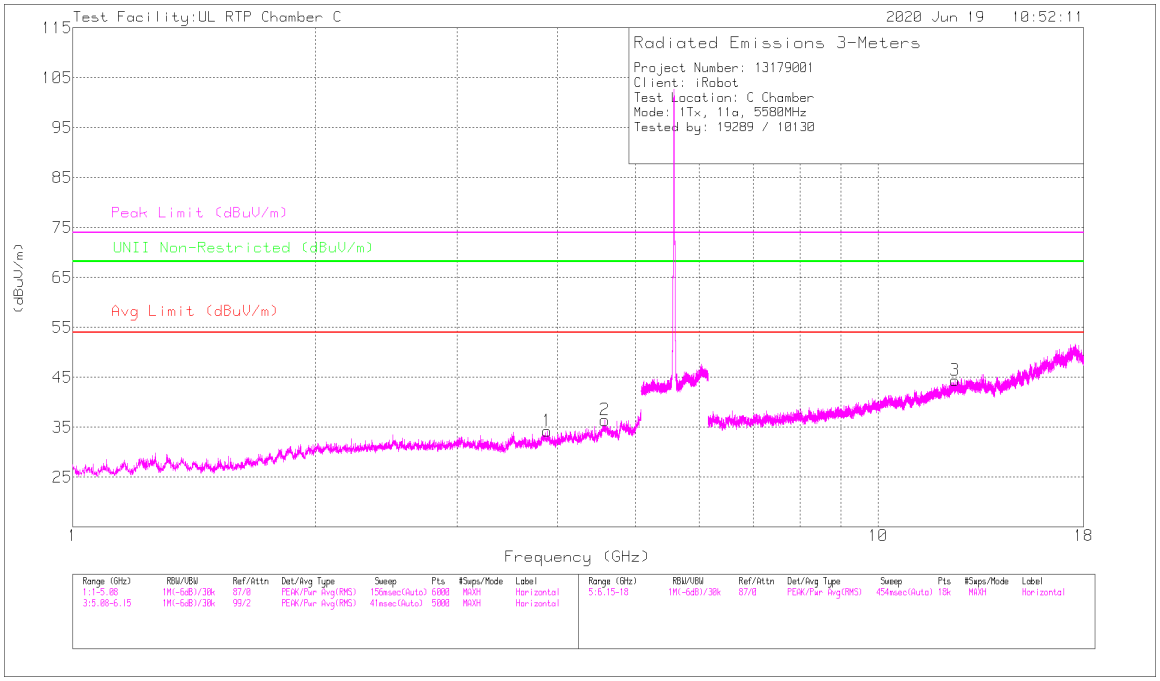

HORIZONTAL

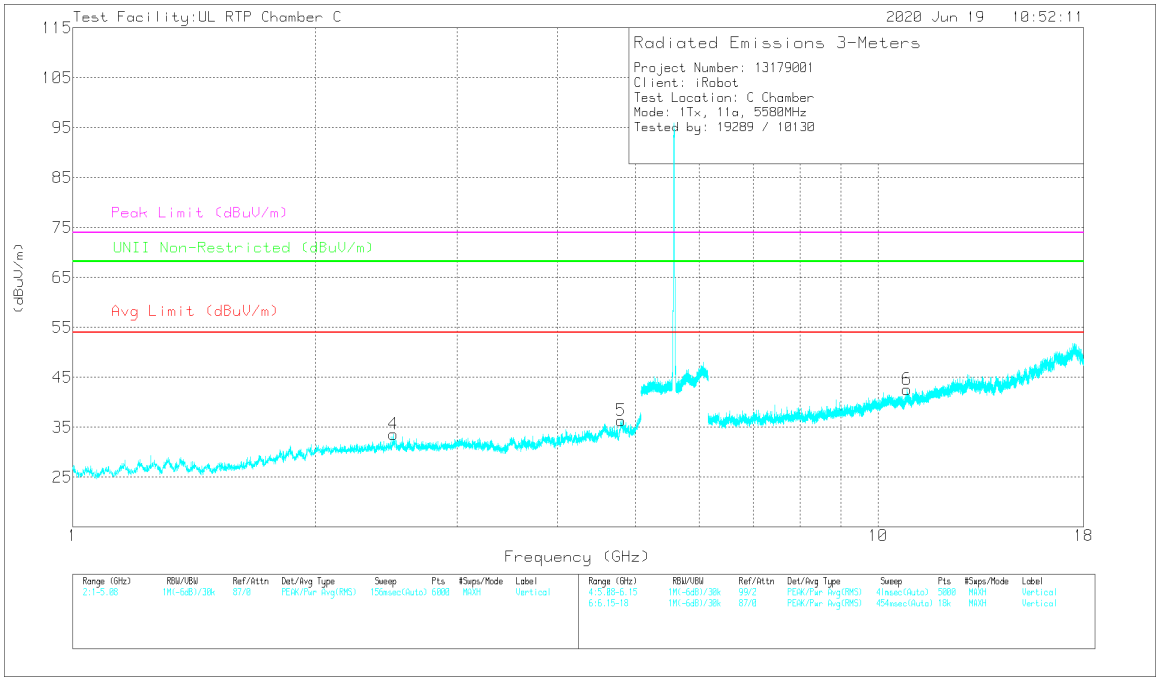

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.88529	56.54	PK-U	33.5	-49.7	0	40.34	-	-	74	-33.66	-	-	251	102	H
	* ** 3.88547	43.35	ADV	33.5	-49.7	.23	27.38	54	-26.62	-	-	-	-	251	102	H
2	* ** 4.57875	57.92	PK-U	34.1	-49.7	0	42.32	-	-	74	-31.68	-	-	144	102	H
	* ** 4.57932	44.34	ADV	34.1	-49.7	.23	28.97	54	-25.03	-	-	-	-	144	102	H
4	** 2.50345	58.91	PK-U	32.7	-52	0	39.61	-	-	-	-	68.2	-28.59	100	209	V
	** 2.50149	45.96	ADV	32.7	-52.1	.23	26.79	-	-	-	-	-	-	100	209	V
5	* ** 4.79715	56.48	PK-U	34.1	-48.6	0	41.98	-	-	74	-32.02	-	-	101	102	V
	* ** 4.79729	43.67	ADV	34.1	-48.6	.23	29.4	54	-24.6	-	-	-	-	101	102	V
3	* ** 12.45634	52.08	PK-U	39	-41	0	50.08	-	-	74	-23.92	-	-	89	166	H
	* ** 12.4564	39.01	ADV	39	-41	.23	37.24	54	-16.76	-	-	-	-	89	166	H
6	* ** 10.86806	52.81	PK-U	37.7	-42.3	0	48.21	-	-	74	-25.79	-	-	5	115	V
	* ** 10.86794	39.66	ADV	37.7	-42.3	.23	35.29	54	-18.71	-	-	-	-	5	115	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

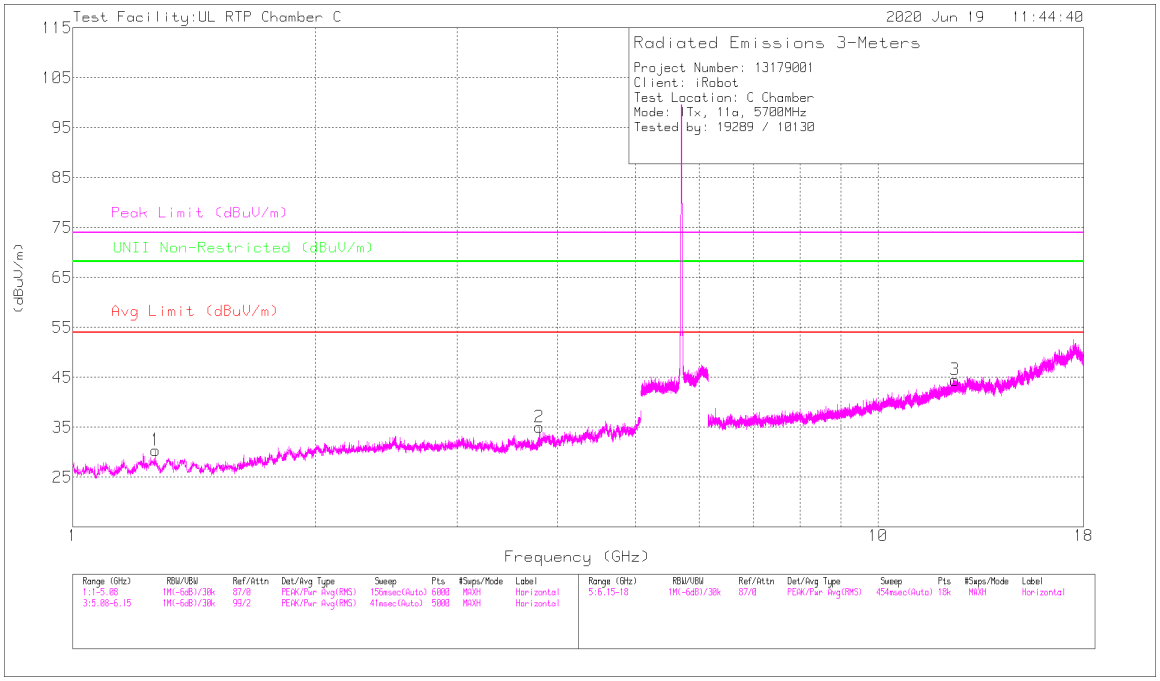

HORIZONTAL

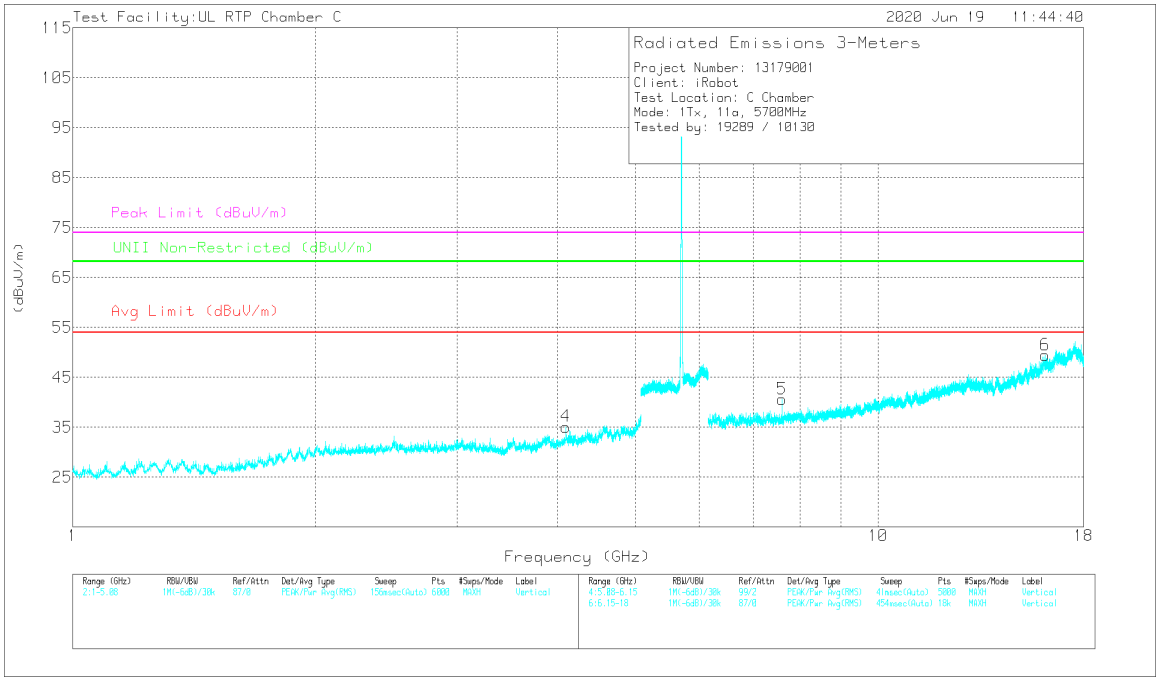

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.26716	63.98	PK-U	28.5	-55.3	0	37.18	-	-	74	-36.82	-	-	230	102	H
	* 1.26721	53.76	ADV	28.5	-55.3	.23	27.19	54	-26.81	-	-	-	-	230	102	H
2	* ** 3.80001	57.75	PK-U	33.6	-49.8	0	41.55	-	-	74	-32.45	-	-	149	102	H
	* ** 3.80002	47.89	ADV	33.6	-49.8	.23	31.92	54	-22.08	-	-	-	-	149	102	H
4	* ** 4.09631	56.44	PK-U	33.5	-49.9	0	40.04	-	-	74	-33.96	-	-	164	102	V
	* ** 4.09549	43.46	ADV	33.5	-50	.23	27.19	54	-26.81	-	-	-	-	164	102	V
3	* ** 12.46984	53.15	PK-U	39	-41	0	51.15	-	-	74	-22.85	-	-	312	112	H
	* ** 12.46955	39.7	ADV	39	-41	.23	37.93	54	-16.07	-	-	-	-	312	112	H
5	* ** 7.59991	57.22	PK-U	35.8	-46.7	0	46.32	-	-	74	-27.68	-	-	337	102	V
	* ** 7.59995	49.09	ADV	35.8	-46.7	.23	38.42	54	-15.58	-	-	-	-	337	102	V
6	* ** 16.12363	50.8	PK-U	41.3	-37.3	0	54.8	-	-	74	-19.2	-	-	259	102	V
	* ** 16.12491	38.43	ADV	41.3	-37.3	.23	42.66	54	-11.34	-	-	-	-	259	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

CHANNEL 144 RESULTS

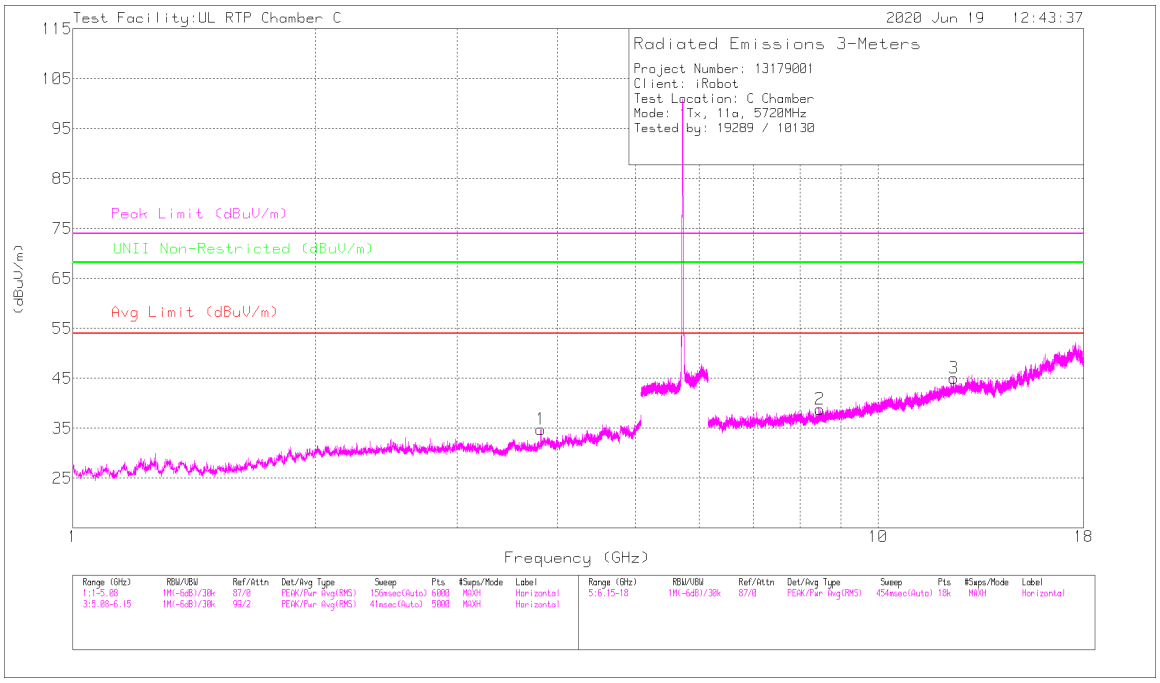

HORIZONTAL

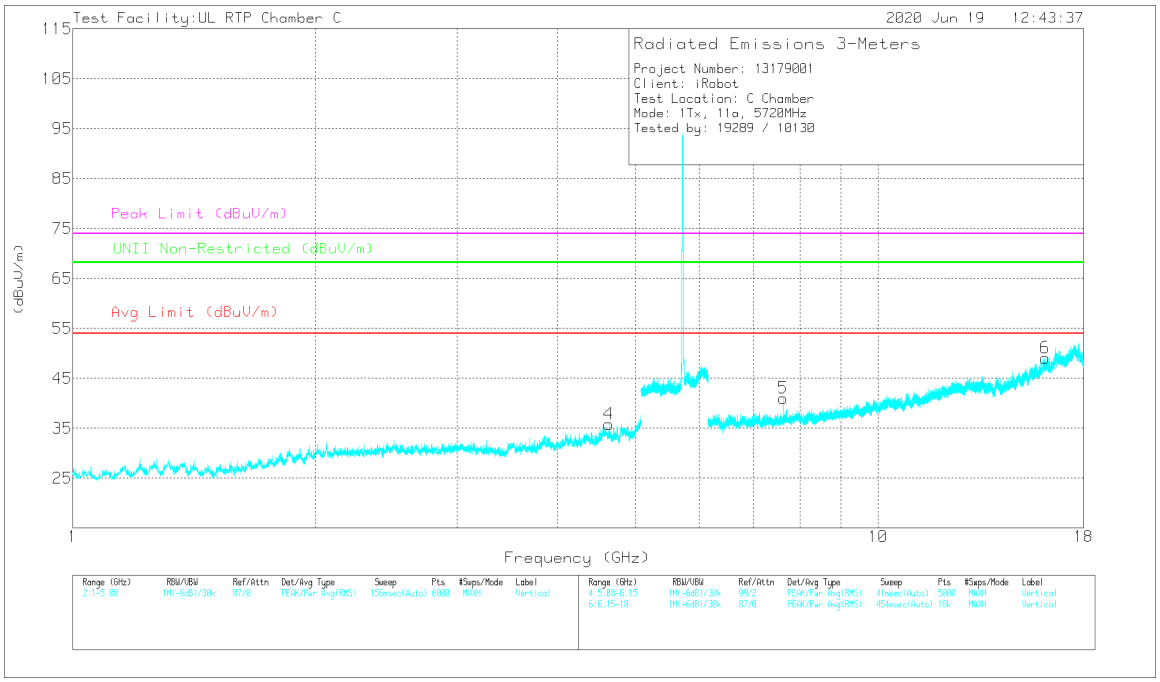

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.8134	57.79	PK-U	33.6	-49.5	0	41.89	-	-	74	-32.11	-	-	157	103	H
	* ** 3.81331	48.19	ADV	33.6	-49.5	.23	32.52	54	-21.48	-	-	-	-	157	103	H
4	* ** 4.6309	55.51	PK-U	34.1	-49.2	0	40.41	-	-	74	-33.59	-	-	9	102	V
	* ** 4.63023	43.11	ADV	34.1	-49.3	.23	28.14	54	-25.86	-	-	-	-	9	102	V
2	* ** 8.47512	54.11	PK-U	35.8	-45.8	0	44.11	-	-	74	-29.89	-	-	291	102	H
	* ** 8.47474	41.24	ADV	35.8	-45.8	.23	31.47	54	-22.53	-	-	-	-	291	102	H
3	* ** 12.41245	51.74	PK-U	39	-40	0	50.74	-	-	74	-23.26	-	-	163	293	H
	* ** 12.41208	38.63	ADV	39	-40	.23	37.86	54	-16.14	-	-	-	-	163	293	H
5	* ** 7.62679	56.67	PK-U	35.8	-46.4	0	46.07	-	-	74	-27.93	-	-	360	304	V
	* ** 7.62662	46.84	ADV	35.8	-46.4	.23	36.47	54	-17.53	-	-	-	-	360	304	V
6	* ** 16.13163	51.47	PK-U	41.3	-37.8	0	54.97	-	-	74	-19.03	-	-	198	242	V
	* ** 16.13062	38.73	ADV	41.3	-37.7	.23	42.56	54	-11.44	-	-	-	-	198	242	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

10.1.10. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

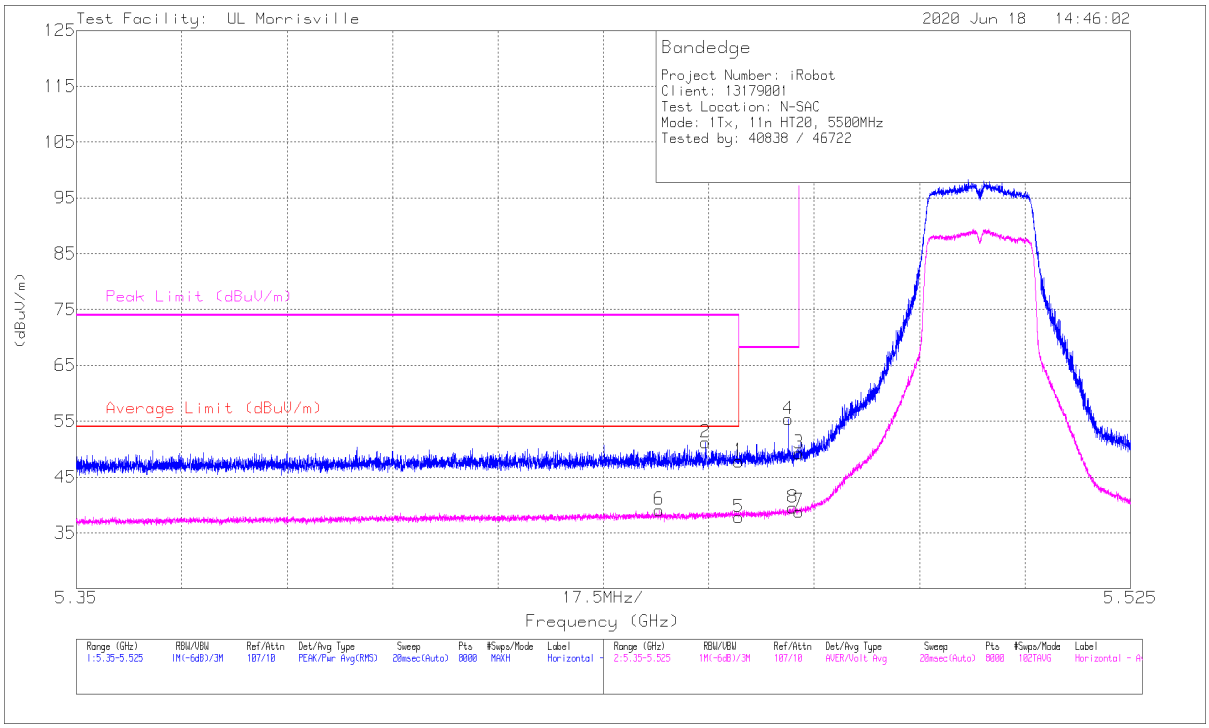

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	35.43	Pk	34.4	-22	0	47.83	-	-	74	-26.17	54	107	H
2	* ** 5.45449	38.8	Pk	34.4	-22	0	51.2	-	-	74	-22.8	54	107	H
5	* ** 5.45998	25.18	ADV	34.4	-22	.24	37.82	54	-16.18	-	-	54	107	H
6	* ** 5.44677	26.56	ADV	34.3	-22	.24	39.1	54	-14.9	-	-	54	107	H
4	5.46819	42.98	Pk	34.4	-22	0	55.38	-	-	68.2	-12.82	54	107	H
8	5.46897	26.91	ADV	34.4	-22	.24	39.55	-	-	-	-	54	107	H
3	5.46998	36.77	Pk	34.4	-21.9	0	49.27	-	-	68.2	-18.93	54	107	H
7	5.46998	26.09	ADV	34.4	-21.9	.24	38.83	-	-	-	-	54	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

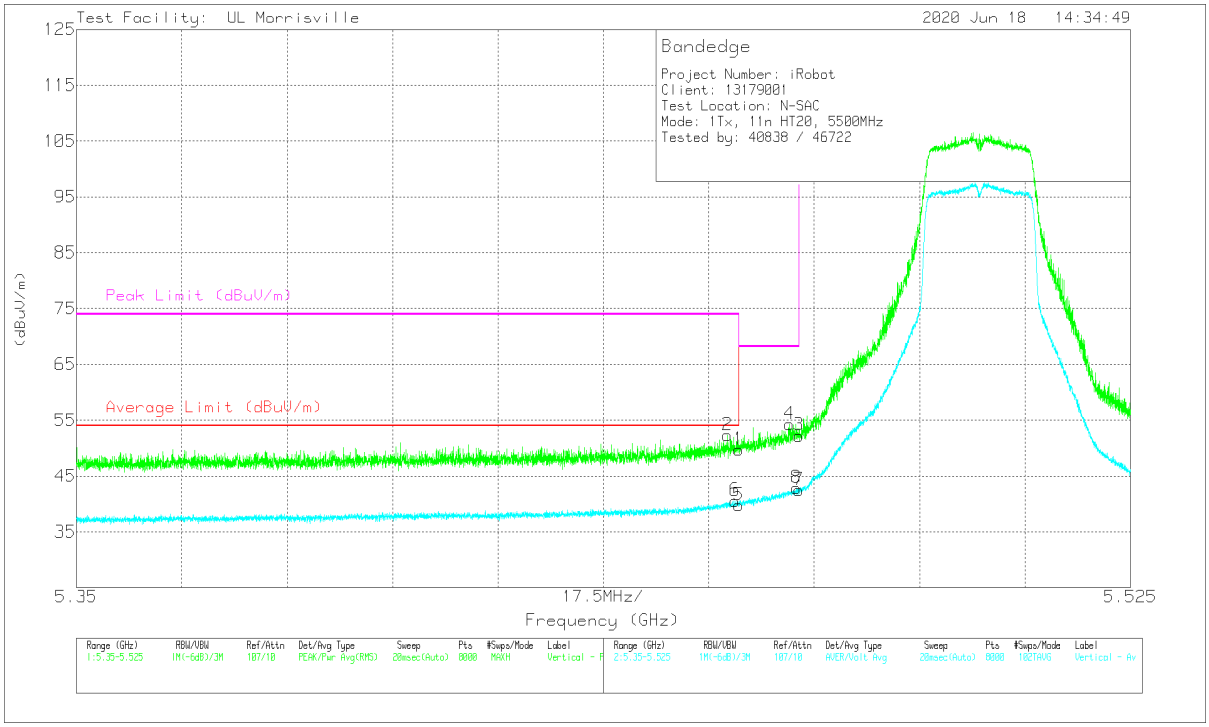

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.32	Pk	34.4	-22	0	49.72	-	-	74	-24.28	29	116	V
2	* ** 5.45808	39.91	Pk	34.4	-22	0	52.31	-	-	74	-21.69	29	116	V
5	* ** 5.45998	27.13	ADV	34.4	-22	.24	39.77	54	-14.23	-	-	29	116	V
6	* ** 5.45932	27.92	ADV	34.4	-22	.24	40.56	54	-13.44	-	-	29	116	V
4	5.46838	41.85	Pk	34.4	-22	0	54.25	-	-	68.2	-13.95	29	116	V
8	5.46952	30.19	ADV	34.4	-22	.24	42.83	-	-	-	-	29	116	V
3	5.46998	39.75	Pk	34.4	-21.9	0	52.25	-	-	68.2	-15.95	29	116	V
7	5.46998	29.72	ADV	34.4	-21.9	.24	42.46	-	-	-	-	29	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

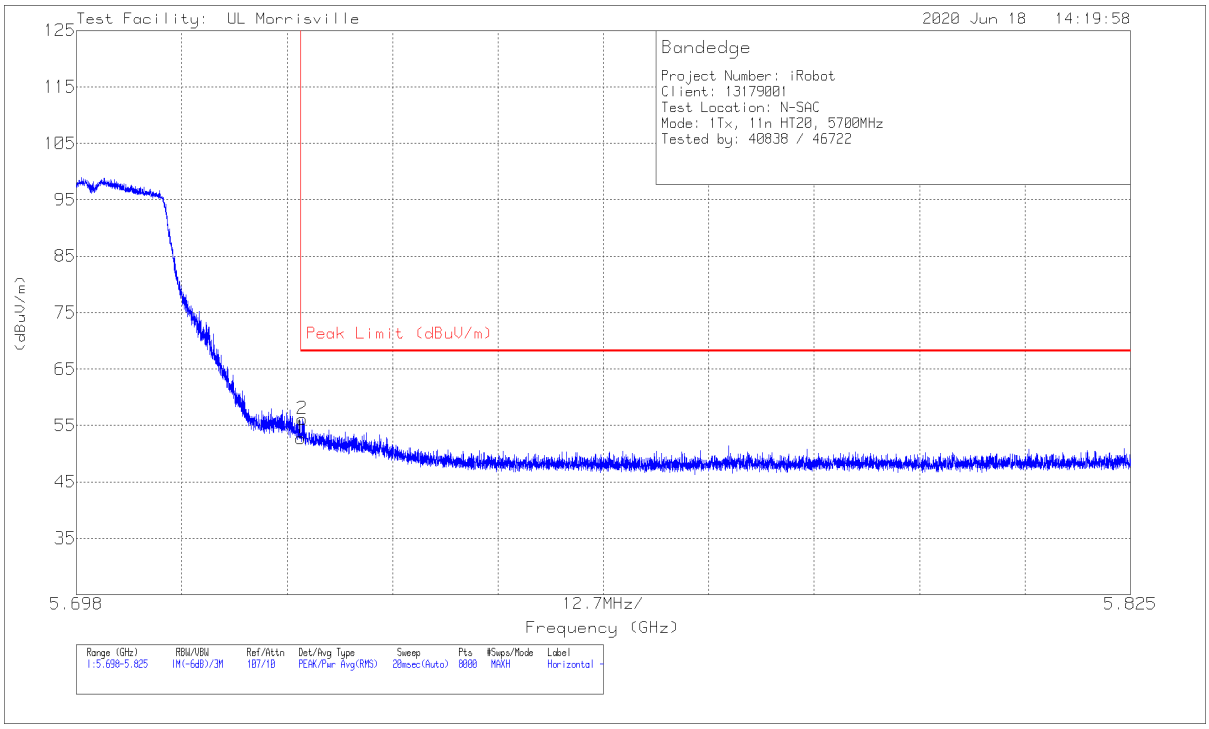

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	39.98	Pk	34.6	-21.8	0	52.78	68.2	-15.42	5	110	H
2	5.72521	43.33	Pk	34.6	-21.8	0	56.13	68.2	-12.07	5	110	H

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

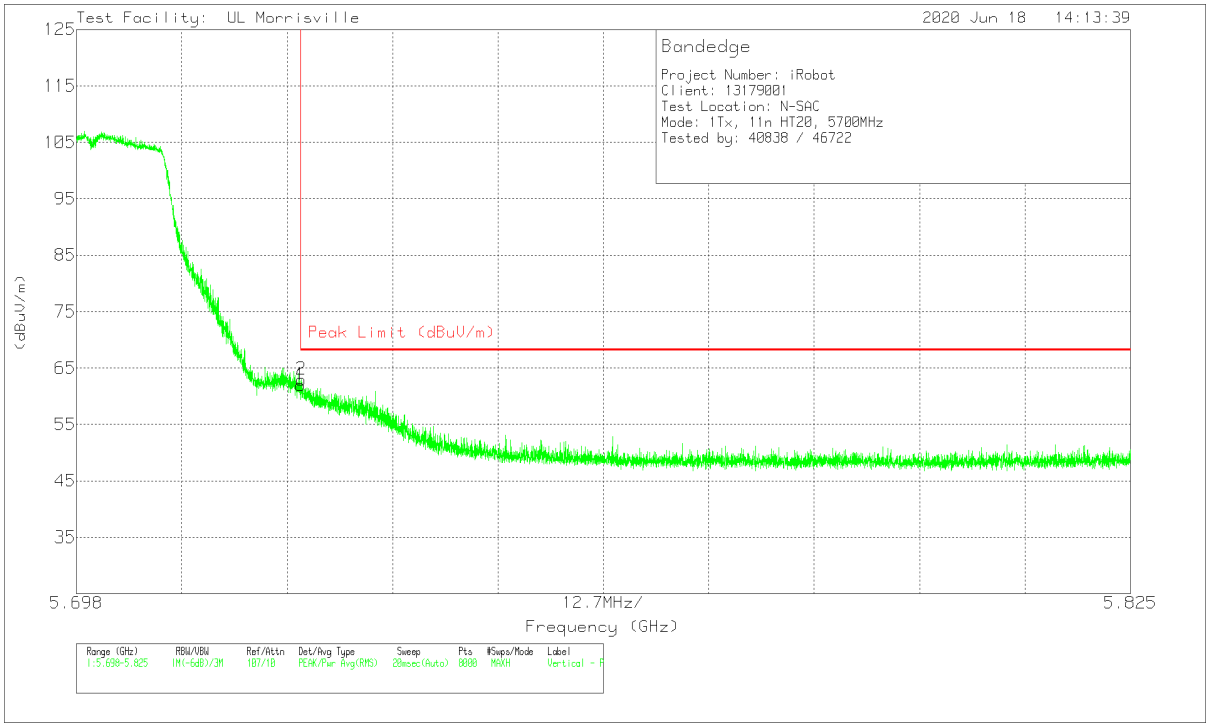

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72501	49.16	Pk	34.6	-21.8	0	61.96	68.2	-6.24	5	110	V
2	5.72509	50.11	Pk	34.6	-21.8	0	62.91	68.2	-5.29	5	110	V

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

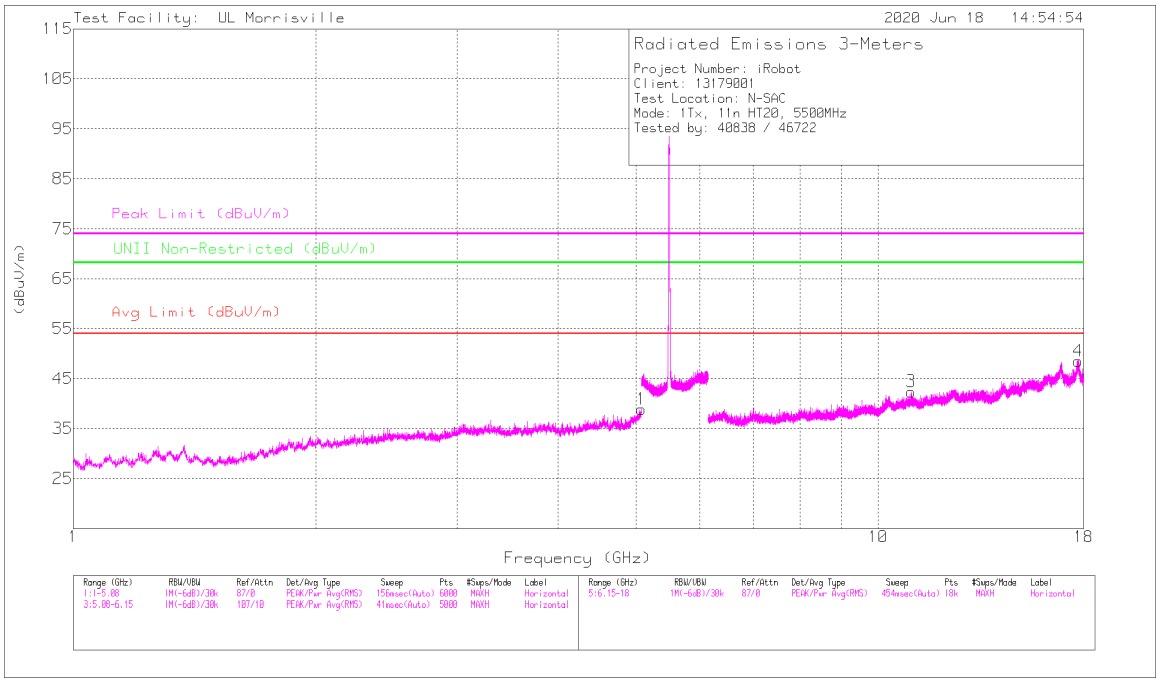

HORIZONTAL

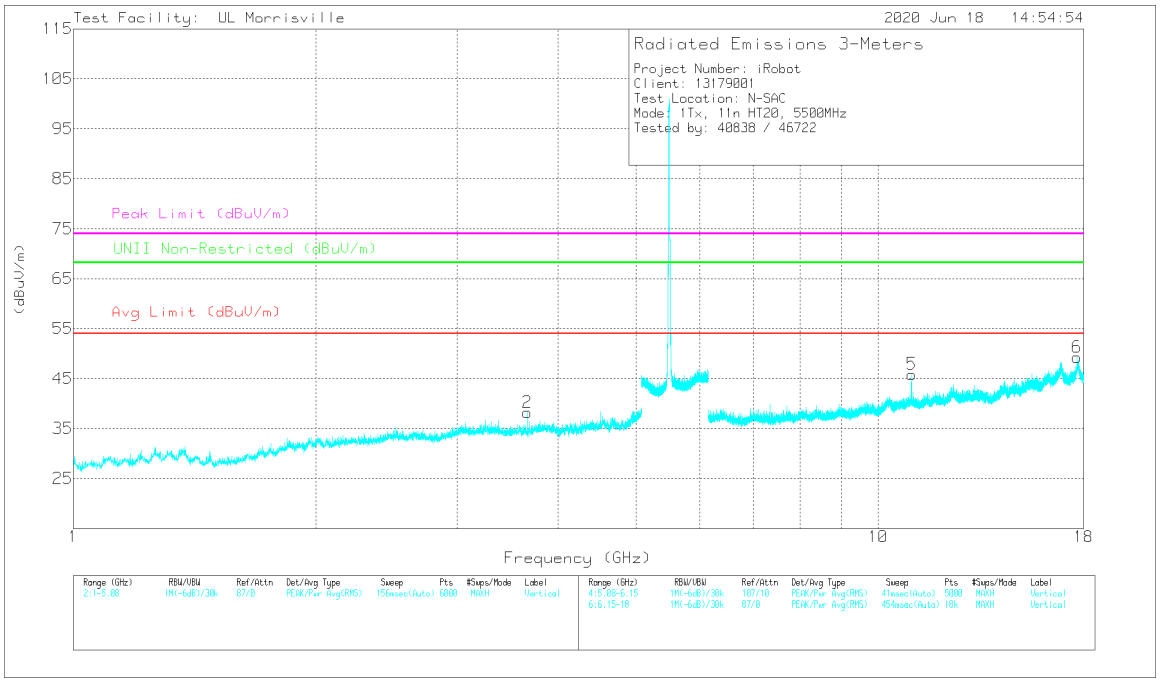

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.07548	40.88	PK-U	34.2	-29.4	0	45.68	-	-	74	-28.32	-	-	176	169	H
	* ** 5.07746	27.46	ADV	34.2	-29.2	.24	32.7	54	-21.3	-	-	-	-	176	169	H
2	* ** 3.66679	42.4	PK-U	33	-32	0	43.4	-	-	74	-30.6	-	-	83	134	V
	* ** 3.66672	33.86	ADV	33	-32	.24	35.1	54	-18.9	-	-	-	-	83	134	V
3	* ** 11.00033	37.05	PK-U	37.9	-25	0	49.95	-	-	74	-24.05	-	-	0	121	H
	* ** 11.00009	24.19	ADV	37.9	-25	.24	37.33	54	-16.67	-	-	-	-	0	121	H
4	* ** 17.7313	34.03	PK-U	41.6	-19.7	0	55.93	-	-	74	-18.07	-	-	260	149	H
	* ** 17.73014	21.07	ADV	41.7	-19.7	.24	43.31	54	-10.69	-	-	-	-	260	149	H
5	* ** 11.00312	40.71	PK-U	37.9	-25	0	53.61	-	-	74	-20.39	-	-	243	225	V
	* ** 11.00149	26.14	ADV	37.9	-25	.24	39.28	54	-14.72	-	-	-	-	243	225	V
6	17.66301	35.6	PK-U	41.7	-21.7	0	55.6	-	-	-	-	68.2	-12.6	0	162	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

MID CHANNEL RESULTS

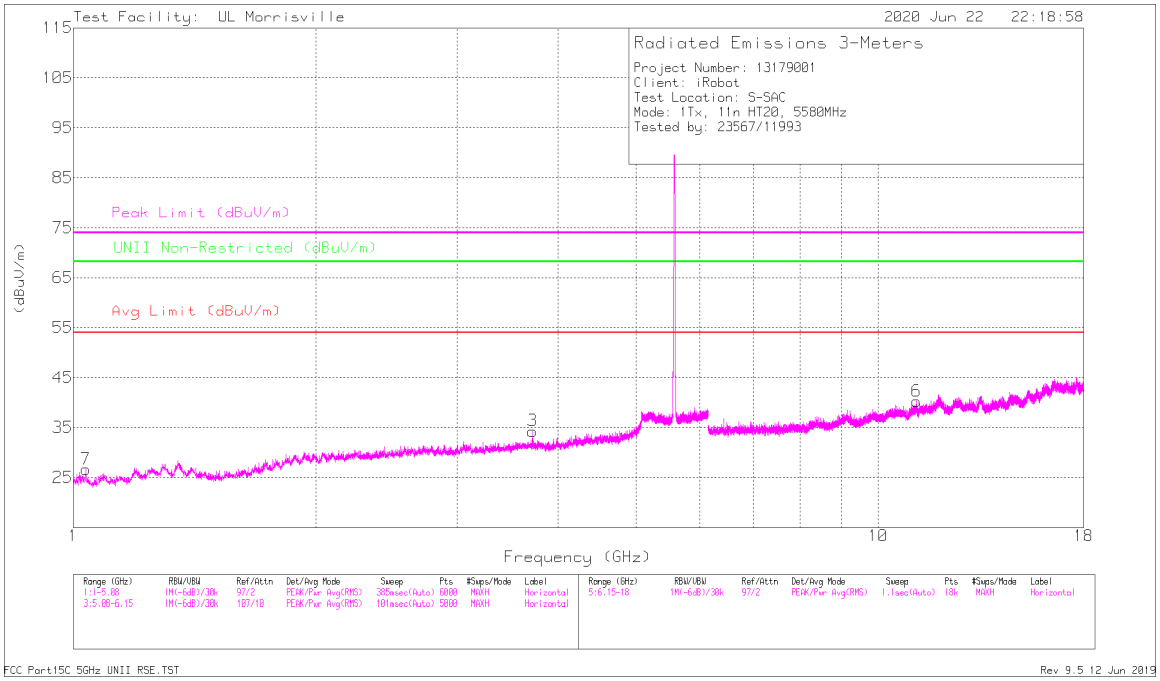

HORIZONTAL

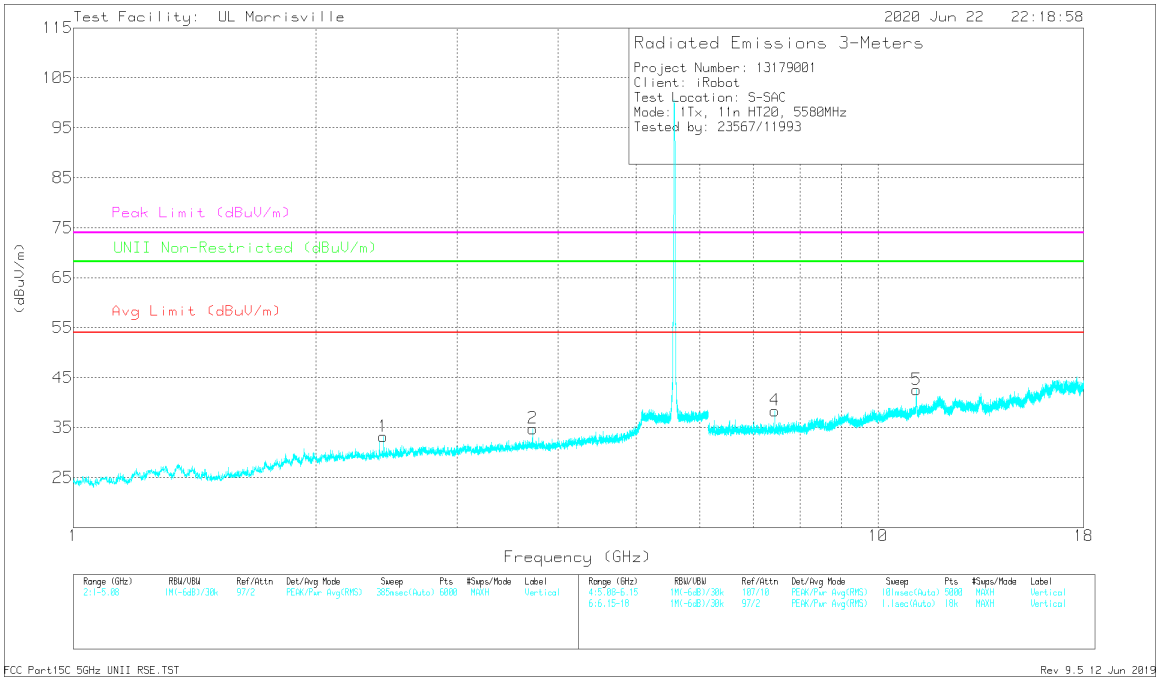

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0078 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* ** 3.71986	40.01	PK-U	33.2	-32.2	0	41.01	-	-	74	-32.99	-	-	93	140	H
	* ** 3.71997	31.39	ADV	33.2	-32.2	.24	32.63	54	-21.37	-	-	-	-	93	140	H
7	* ** 1.03661	41.57	PK-U	27	-35.3	0	33.27	-	-	74	-40.73	-	-	189	254	H
	* ** 1.0368	32.39	ADV	27	-35.3	.24	24.33	54	-29.67	-	-	-	-	189	254	H
2	* ** 3.71994	39.91	PK-U	33.2	-32.2	0	40.91	-	-	74	-33.09	-	-	111	109	V
	* ** 3.72001	32.78	ADV	33.2	-32.2	.24	34.02	54	-19.98	-	-	-	-	111	109	V
6	* ** 11.1613	35.81	PK-U	37.9	-24.7	0	49.01	-	-	74	-24.99	-	-	78	126	H
	* ** 11.16002	25.08	ADV	37.9	-24.7	.24	38.52	54	-15.48	-	-	-	-	78	126	H
4	* ** 7.43989	38.54	PK-U	35.6	-28.1	0	46.04	-	-	74	-27.96	-	-	72	104	V
	* ** 7.43998	31.51	ADV	35.6	-28.1	.24	39.25	54	-14.75	-	-	-	-	72	104	V
5	* ** 11.15712	37.52	PK-U	37.9	-24.6	0	50.82	-	-	74	-23.18	-	-	328	221	V
	* ** 11.15497	26.03	ADV	37.9	-24.6	.24	39.57	54	-14.43	-	-	-	-	328	221	V
1	2.42598	42.07	PK-U	32.1	-34.2	0	39.97	-	-	-	-	68.2	-28.23	24	119	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

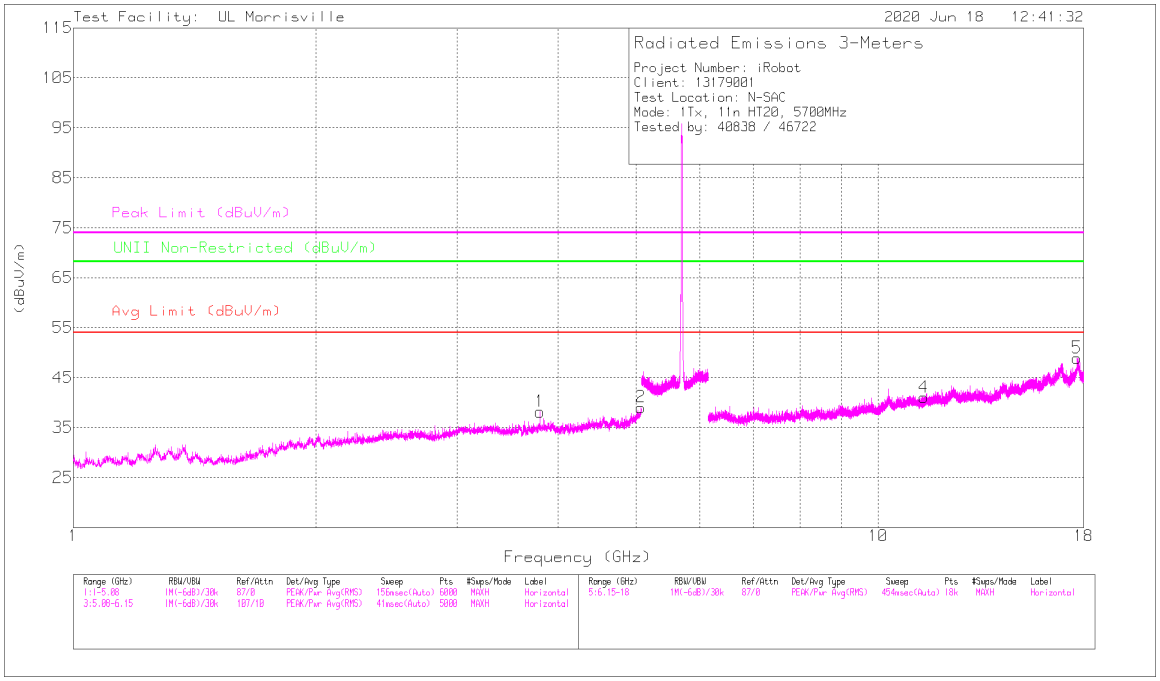

HORIZONTAL

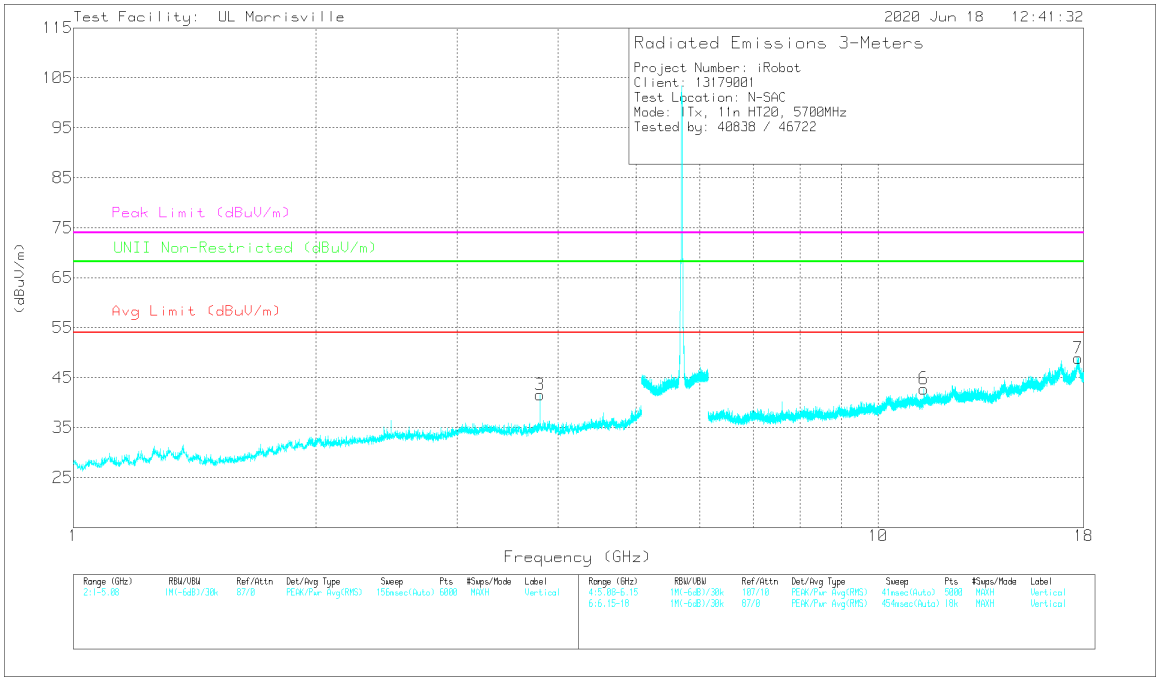

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.80009	41.99	PK-U	33.6	-32.3	0	43.29	-	-	74	-30.71	-	-	141	385	H
	* ** 3.79996	31.91	ADV	33.6	-32.3	.24	33.45	54	-20.55	-	-	-	-	141	385	H
2	* ** 5.0756	40.04	PK-U	34.2	-29.4	0	44.84	-	-	74	-29.16	-	-	172	231	H
	* ** 5.07327	27.61	ADV	34.2	-29.5	.24	32.55	54	-21.45	-	-	-	-	172	231	H
3	* ** 3.79989	45.43	PK-U	33.6	-32.3	0	46.73	-	-	74	-27.27	-	-	64	270	V
	* ** 3.79995	37.4	ADV	33.6	-32.3	.24	38.94	54	-15.06	-	-	-	-	64	270	V
4	* ** 11.39396	35.11	PK-U	38.1	-25.4	0	47.81	-	-	74	-26.19	-	-	120	113	H
	* ** 11.39555	22.63	ADV	38.1	-25.4	.24	35.57	54	-18.43	-	-	-	-	120	113	H
6	* ** 11.40069	39.55	PK-U	38.1	-25.5	0	52.15	-	-	74	-21.85	-	-	244	225	V
	* ** 11.39983	27.42	ADV	38.1	-25.5	.24	40.26	54	-13.74	-	-	-	-	244	225	V
7	* ** 17.72375	32.69	PK-U	41.7	-19.8	0	54.59	-	-	74	-19.41	-	-	41	242	V
	* ** 17.72389	20.4	ADV	41.7	-19.8	.24	42.54	54	-11.46	-	-	-	-	41	242	V
5	17.66724	34.61	PK-U	41.7	-21.5	0	54.81	-	-	-	-	68.2	-13.39	109	224	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

CHANNEL 144 RESULTS

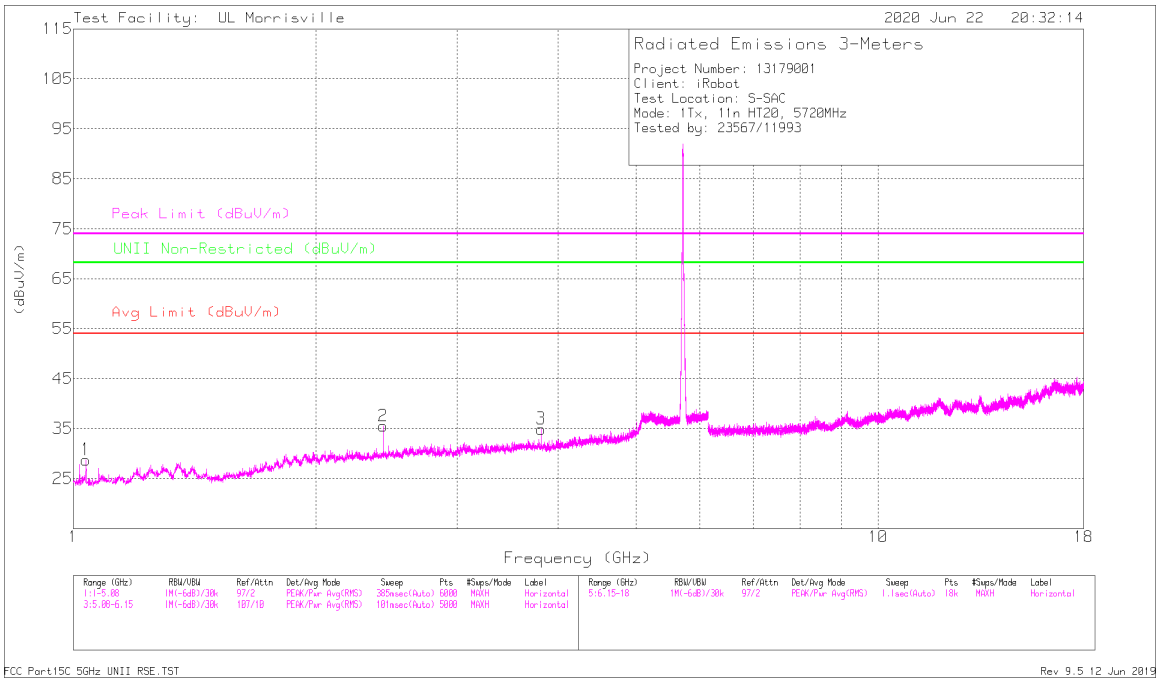

HORIZONTAL

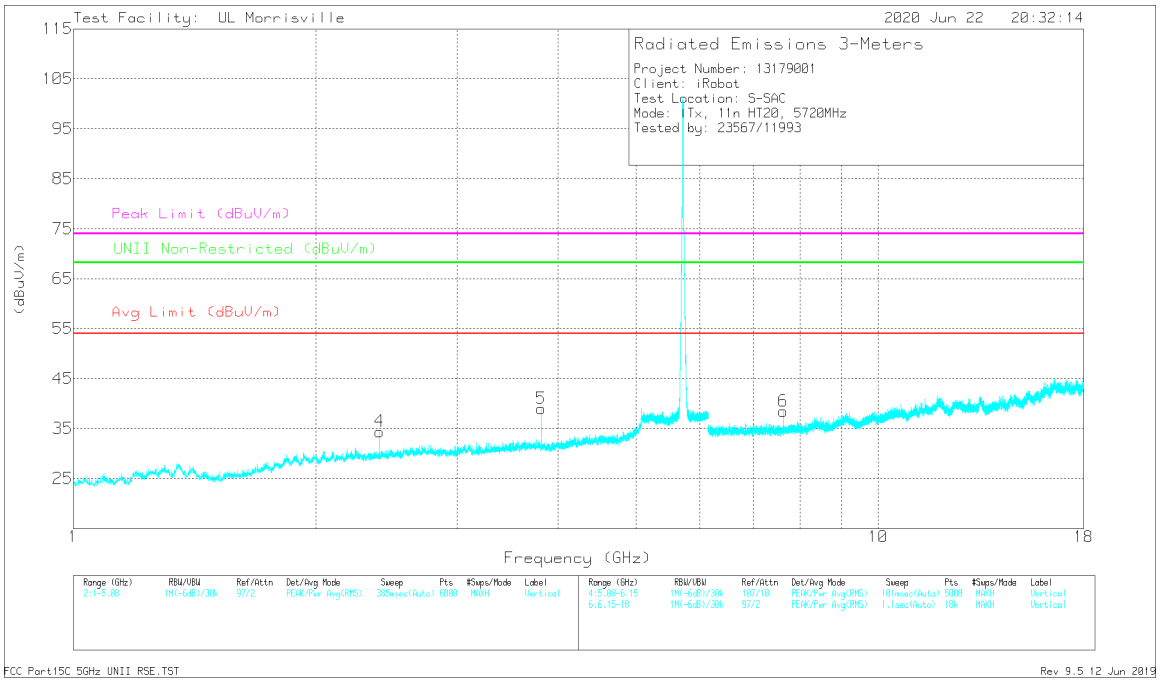

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0078 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.03688	42.99	PK-U	27	-35.3	0	34.69	-	-	74	-39.31	-	-	51	254	H
	* ** 1.03682	33.64	ADV	27	-35.3	.24	25.58	54	-28.42	-	-	-	-	51	254	H
3	* ** 3.81321	40.72	PK-U	33.2	-32.5	0	41.42	-	-	74	-32.58	-	-	90	148	H
	* ** 3.81332	33.37	ADV	33.2	-32.5	.24	34.31	54	-19.69	-	-	-	-	90	148	H
5	* ** 3.81329	41.44	PK-U	33.2	-32.5	0	42.14	-	-	74	-31.86	-	-	120	114	V
	* ** 3.81332	35.59	ADV	33.2	-32.5	.24	36.53	54	-17.47	-	-	-	-	120	114	V
6	* ** 7.62653	36.56	PK-U	35.7	-27.9	0	44.36	-	-	74	-29.64	-	-	266	125	V
	* ** 7.62664	30.31	ADV	35.7	-27.9	.24	38.35	54	-15.65	-	-	-	-	266	125	V
4	2.40187	40.99	PK-U	32	-34.1	0	38.89	-	-	-	-	68.2	-29.31	186	318	V
2	2.42624	42.78	PK-U	32.1	-34.2	0	40.68	-	-	-	-	68.2	-27.52	89	182	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

1TX PCB Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

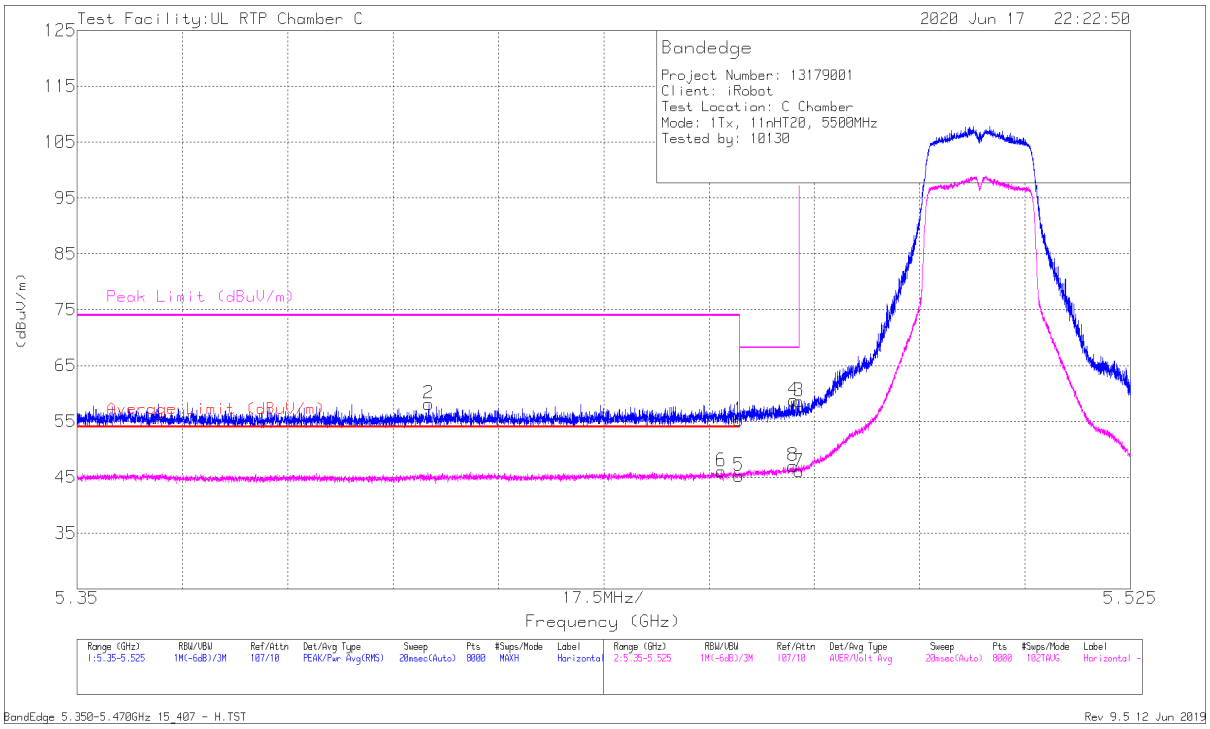

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	36.23	Pk	34.6	-15.6	0	55.23	-	-	74	-18.77	91	135	H
2	* ** 5.40841	38.87	Pk	34.6	-15.3	0	58.17	-	-	74	-15.83	91	135	H
5	* ** 5.45998	26.01	ADV	34.6	-15.6	.24	45.25	54	-8.75	-	-	91	135	H
6	* ** 5.45703	26.84	ADV	34.6	-15.6	.24	46.08	54	-7.92	-	-	91	135	H
8	5.46897	27.63	ADV	34.6	-15.4	.24	47.07	-	-	-	-	91	135	H
4	5.46904	39.59	Pk	34.6	-15.4	0	58.79	-	-	68.2	-9.41	91	135	H
3	5.46998	39.43	Pk	34.6	-15.4	0	58.63	-	-	68.2	-9.57	91	135	H
7	5.46998	26.6	ADV	34.6	-15.4	.24	46.04	-	-	-	-	91	135	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

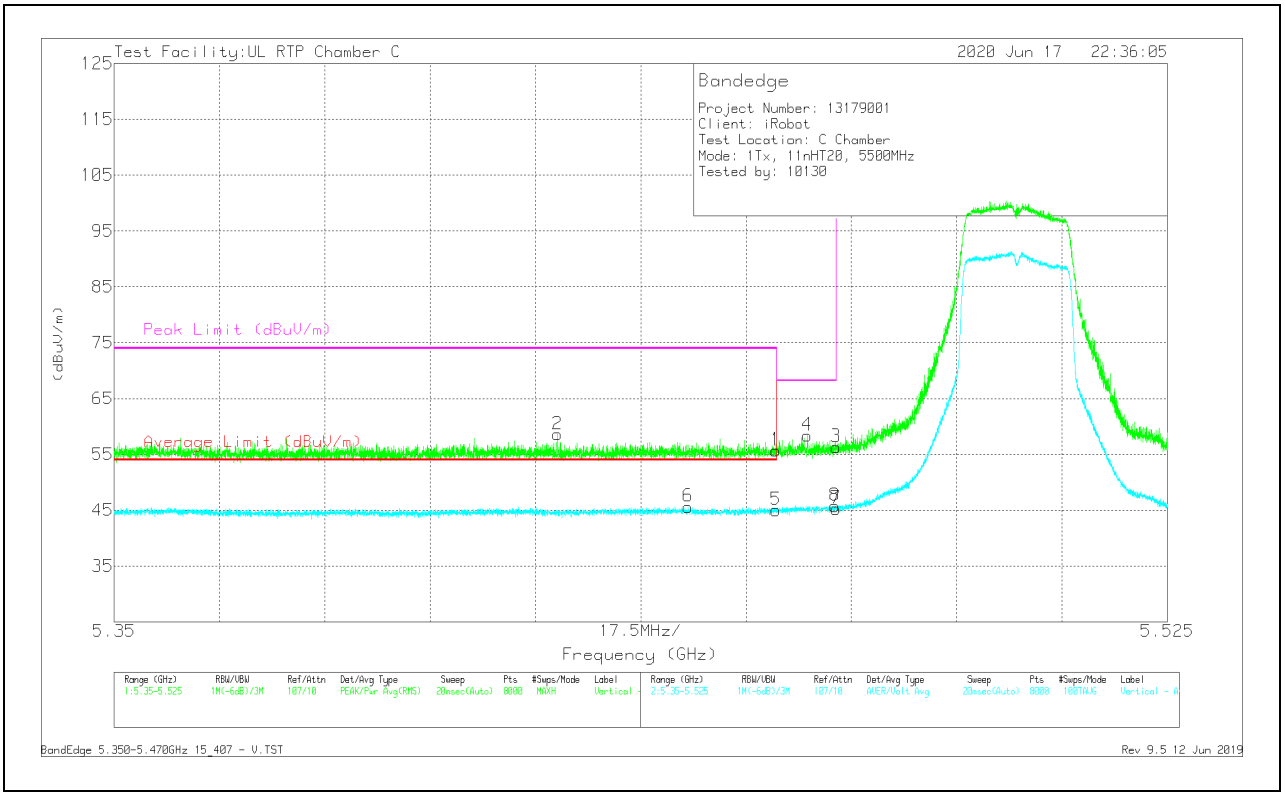

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	36.72	Pk	34.6	-15.6	0	55.72	-	-	74	-18.28	205	248	V
2	* ** 5.42364	39.48	Pk	34.6	-15.5	0	58.58	-	-	74	-15.42	205	248	V
5	* ** 5.45998	25.8	ADV	34.6	-15.6	.24	45.04	54	-8.96	-	-	205	248	V
6	* ** 5.44534	26.28	ADV	34.6	-15.5	.24	45.62	54	-8.38	-	-	205	248	V
4	5.46517	39.2	Pk	34.6	-15.4	0	58.4	-	-	68.2	-9.8	205	248	V
8	5.46972	26.33	ADV	34.6	-15.4	.24	45.77	-	-	-	-	205	248	V
3	5.46998	37.12	Pk	34.6	-15.4	0	56.32	-	-	68.2	-11.88	205	248	V
7	5.46998	25.85	ADV	34.6	-15.4	.24	45.29	-	-	-	-	205	248	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

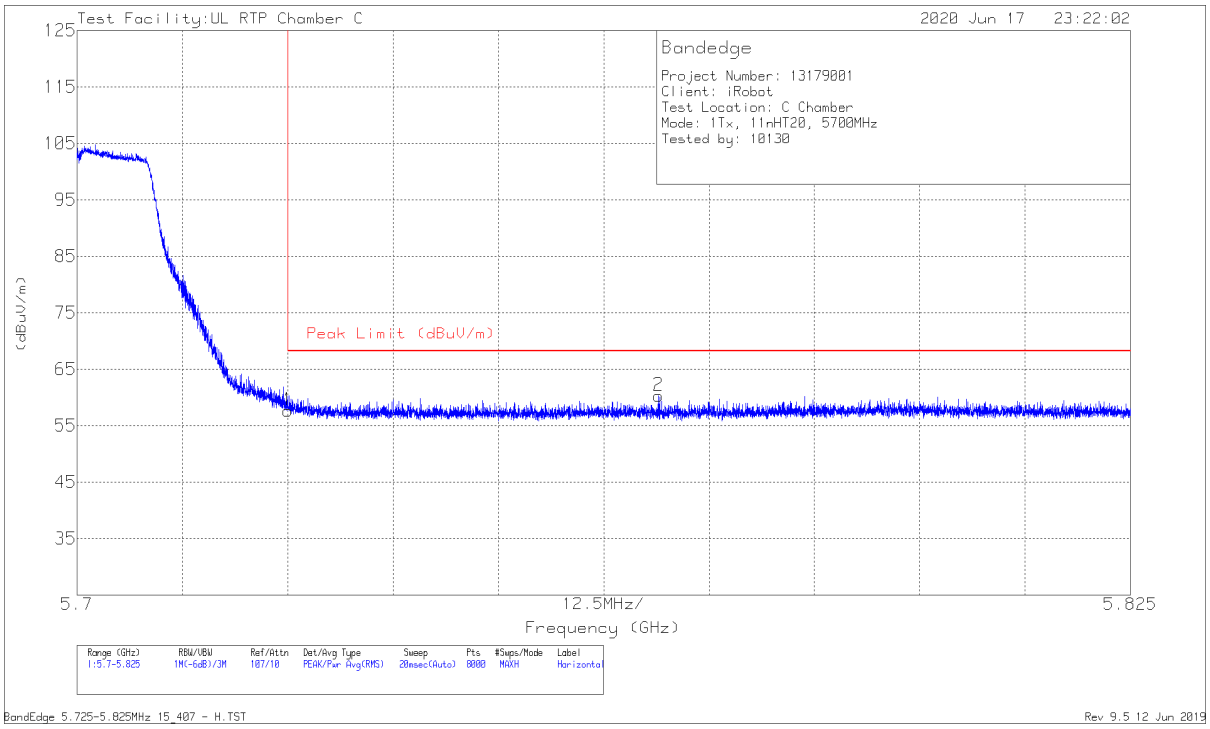

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.89	Pk	34.6	-14.8	57.69	68.2	-10.51	63	300	H
2	5.76902	40.23	Pk	34.7	-14.6	60.33	68.2	-7.87	63	300	H

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

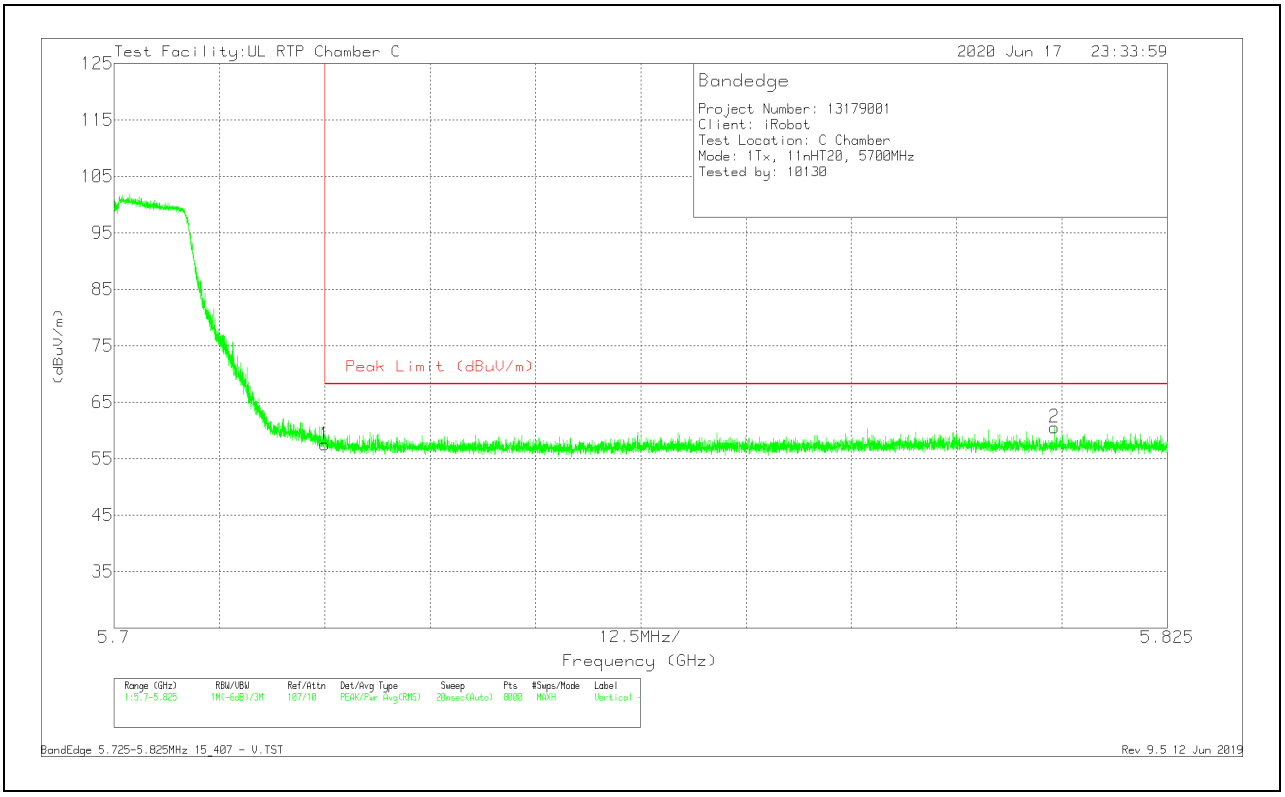

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.7	Pk	34.6	-14.8	57.5	68.2	-10.7	250	294	V
2	5.81159	39.93	Pk	34.9	-14.3	60.53	68.2	-7.67	250	294	V

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

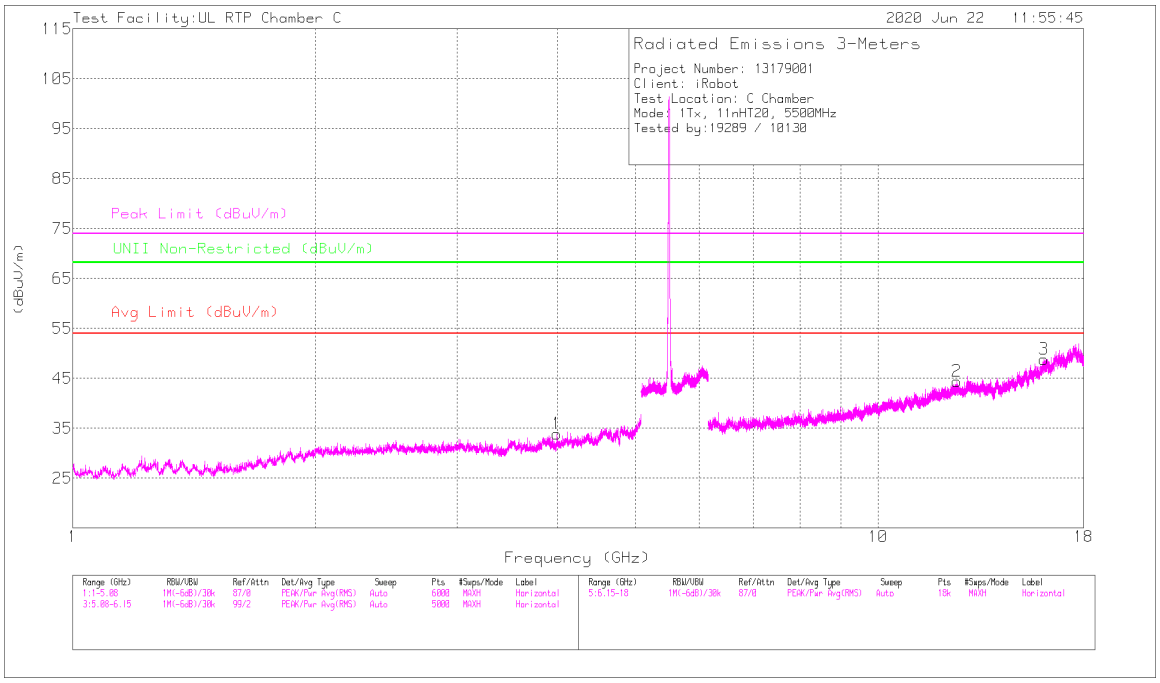

HORIZONTAL

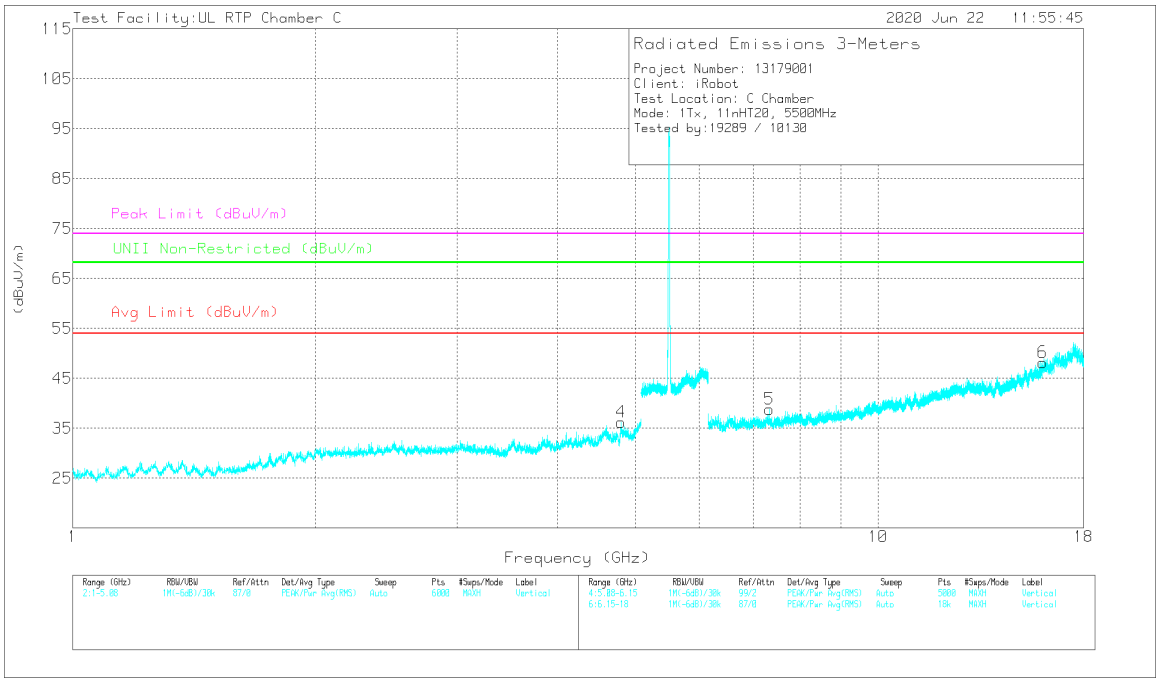

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.99358	54.57	PK-U	33.4	-49.1	0	38.87	-	-	74	-35.13	-	-	255	102	H
	* ** 3.99415	41.69	ADV	33.4	-49.1	.24	26.23	54	-27.77	-	-	-	-	255	102	H
4	* ** 4.80021	55.22	PK-U	34.1	-48.8	0	40.52	-	-	74	-33.48	-	-	70	102	V
	* ** 4.80033	43.24	ADV	34.1	-48.8	.24	28.78	54	-25.22	-	-	-	-	70	102	V
2	* ** 12.52931	52.11	PK-U	39.1	-41	0	50.21	-	-	74	-23.79	-	-	31	155	H
	* ** 12.52969	39.24	ADV	39.1	-41	.24	37.58	54	-16.42	-	-	-	-	31	155	H
3	* ** 16.07154	49.67	PK-U	41.3	-36.4	0	54.57	-	-	74	-19.43	-	-	155	140	H
	* ** 16.07319	37.75	ADV	41.3	-36.3	.24	42.99	54	-11.01	-	-	-	-	155	140	H
5	* ** 7.33323	58.05	PK-U	35.7	-47.3	0	46.45	-	-	74	-27.55	-	-	301	299	V
	* ** 7.33333	48.95	ADV	35.7	-47.3	.24	37.59	54	-16.41	-	-	-	-	301	299	V
6	* ** 16.01372	50.71	PK-U	41.2	-36.8	0	55.11	-	-	74	-18.89	-	-	253	360	V
	* ** 16.01518	38.14	ADV	41.2	-36.8	.24	42.78	54	-11.22	-	-	-	-	253	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

MID CHANNEL RESULTS

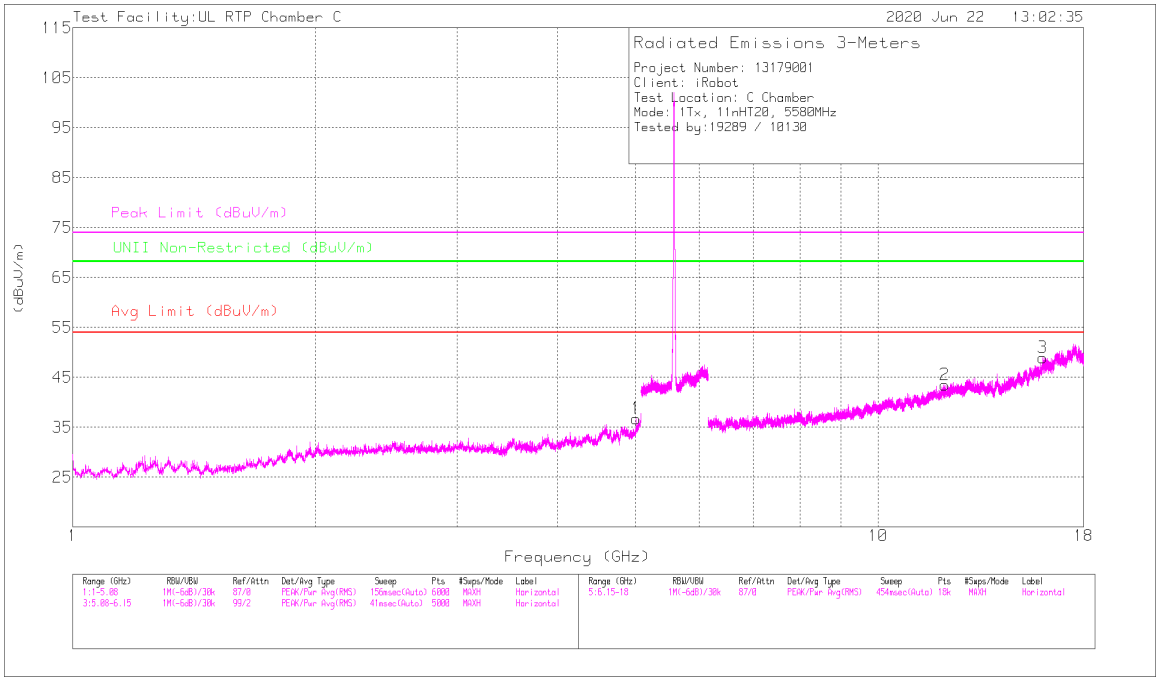

HORIZONTAL

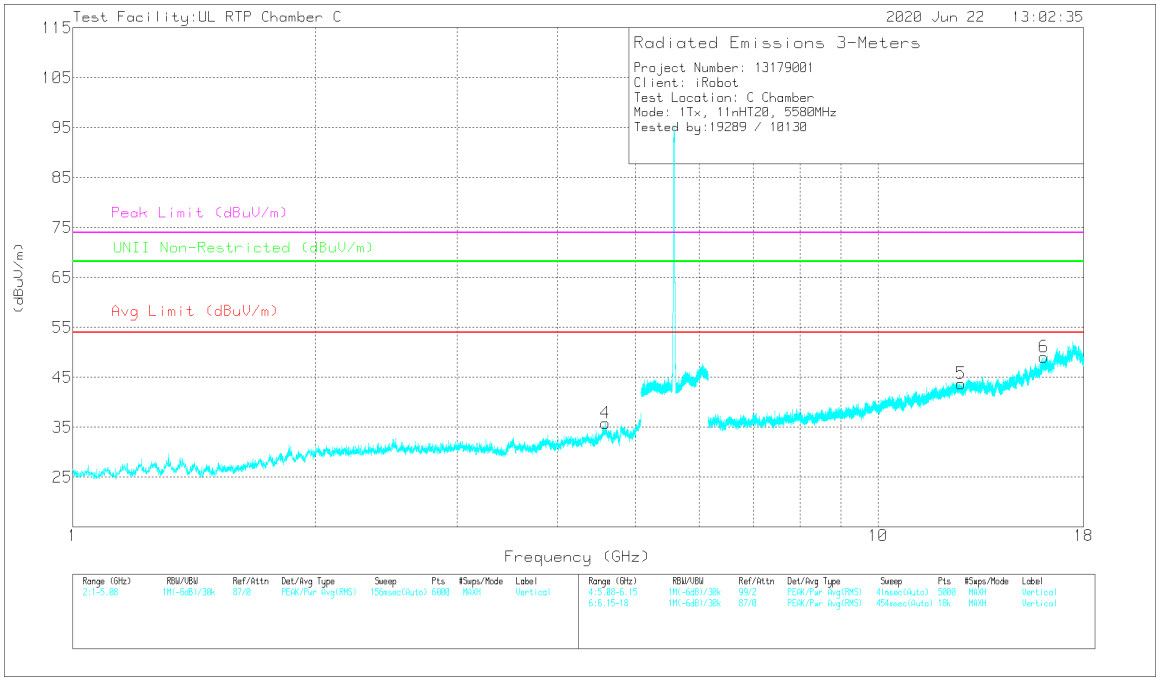

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.00747	55.24	PK-U	34.1	-47.8	0	41.54	-	-	74	-32.46	-	-	66	102	H
	* ** 5.00657	42.78	ADV	34.1	-47.8	.24	29.32	54	-24.68	-	-	-	-	66	102	H
4	* ** 4.58759	57.88	PK-U	34.1	-49.8	0	42.18	-	-	74	-31.82	-	-	188	102	V
	* ** 4.58745	44.04	ADV	34.1	-49.8	.24	28.58	54	-25.42	-	-	-	-	188	102	V
2	* ** 12.10783	51.69	PK-U	38.9	-41.2	0	49.39	-	-	74	-24.61	-	-	122	102	H
	* ** 12.10791	38.53	ADV	38.9	-41.2	.24	36.47	54	-17.53	-	-	-	-	122	102	H
3	* ** 16.00961	51.27	PK-U	41.2	-37.1	0	55.37	-	-	74	-18.63	-	-	281	286	H
	* ** 16.00993	37.97	ADV	41.2	-37.1	.24	42.31	54	-11.69	-	-	-	-	281	286	H
5	* ** 12.68462	51.28	PK-U	39.3	-40	0	50.58	-	-	74	-23.42	-	-	101	162	V
	* ** 12.68503	37.93	ADV	39.3	-40.1	.24	37.37	54	-16.63	-	-	-	-	101	162	V
6	* ** 16.07356	50.59	PK-U	41.3	-36.3	0	55.59	-	-	74	-18.41	-	-	82	351	V
	* ** 16.07341	37.96	ADV	41.3	-36.3	.24	43.2	54	-10.8	-	-	-	-	82	351	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

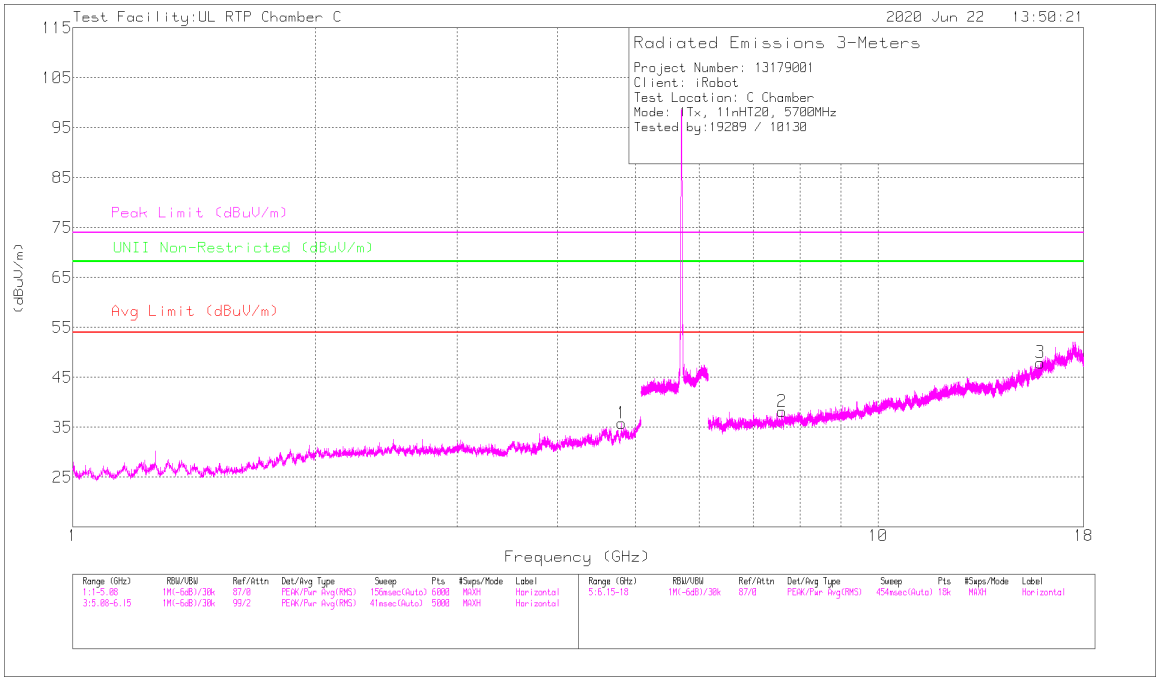

HORIZONTAL

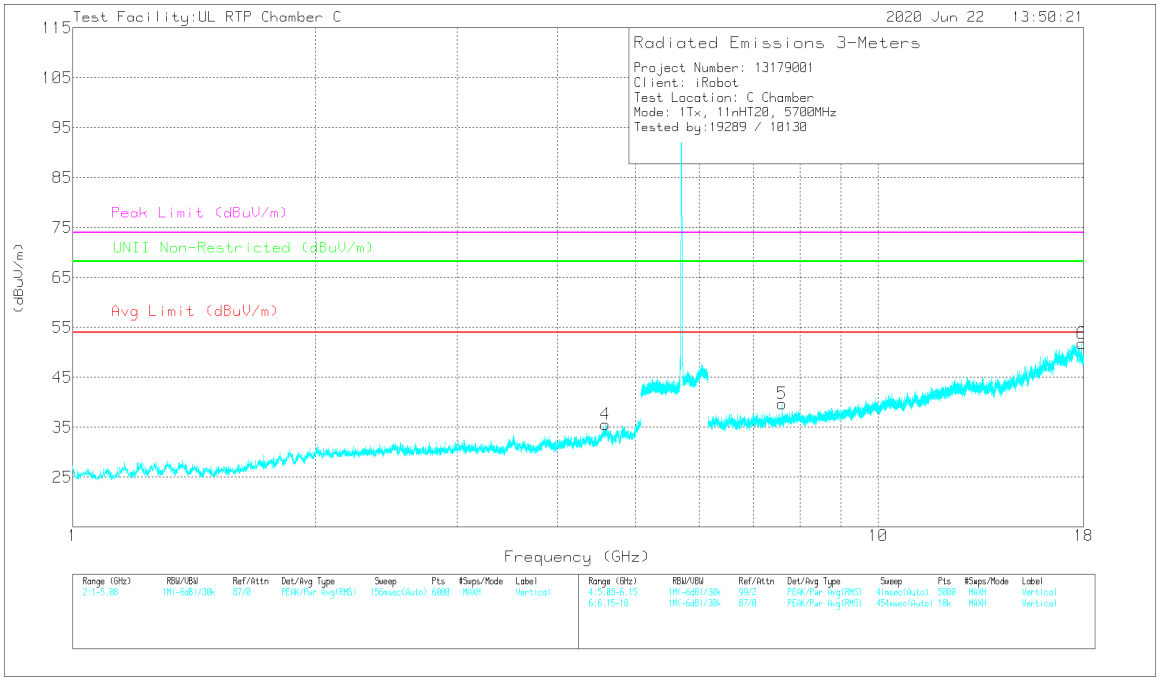

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.80633	55.1	PK-U	34.1	-48.8	0	40.4	-	-	74	-33.6	-	-	164	102	H
	* ** 4.80634	41.85	ADV	34.1	-48.8	.24	27.39	54	-26.61	-	-	-	-	164	102	H
4	* ** 4.58915	56.63	PK-U	34.1	-49.8	0	40.93	-	-	74	-33.07	-	-	145	102	V
	* ** 4.58847	43.71	ADV	34.1	-49.8	.24	28.25	54	-25.75	-	-	-	-	145	102	V
2	* ** 7.6	56.27	PK-U	35.8	-46.7	0	45.37	-	-	74	-28.63	-	-	123	102	H
	* ** 7.59997	45.12	ADV	35.8	-46.7	.24	34.46	54	-19.54	-	-	-	-	123	102	H
3	* ** 15.90484	51.72	PK-U	41	-37.2	0	55.52	-	-	74	-18.48	-	-	253	315	H
	* ** 15.90523	37.89	ADV	41	-37.2	.24	41.93	54	-12.07	-	-	-	-	253	315	H
5	* ** 7.5999	57.13	PK-U	35.8	-46.7	0	46.23	-	-	74	-27.77	-	-	1	312	V
	* ** 7.59995	47.83	ADV	35.8	-46.7	.24	37.17	54	-16.83	-	-	-	-	1	312	V
6	* ** 17.91552	50	PK-U	41.4	-34.4	0	57	-	-	74	-17	-	-	125	100	V
	* ** 17.91528	36.77	ADV	41.4	-34.4	.24	44.01	54	-9.99	-	-	-	-	125	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

CHANNEL 144 RESULTS

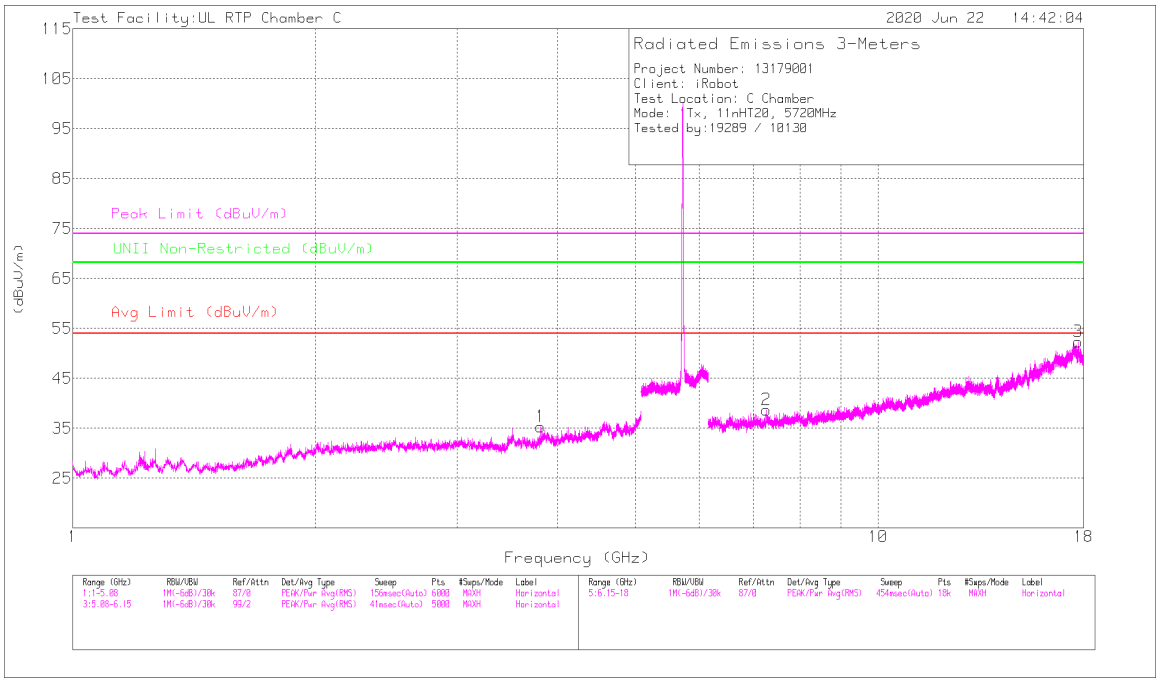

HORIZONTAL

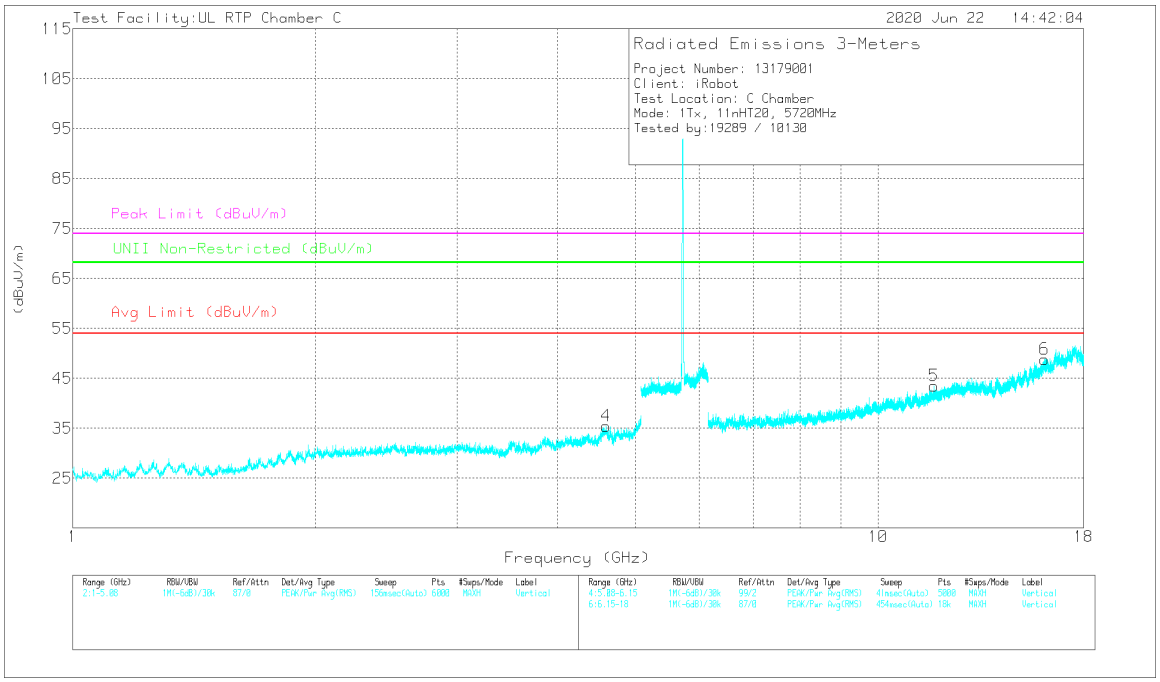

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 3.81349	56.55	PK-U	33.6	-49.5	0	40.65	-	-	74	-33.35	-	-	149	102	H
	* ** 3.81336	47.48	ADV	33.6	-49.5	.24	31.82	54	-22.18	-	-	-	-	149	102	H
4	* ** 4.5975	57.33	PK-U	34.2	-49.7	0	41.83	-	-	74	-32.17	-	-	347	102	V
	* ** 4.5974	43.97	ADV	34.2	-49.7	.24	28.71	54	-25.29	-	-	-	-	347	102	V
2	* ** 7.27097	54.77	PK-U	35.7	-46.5	0	43.97	-	-	74	-30.03	-	-	72	102	H
	* ** 7.27181	41.58	ADV	35.7	-46.4	.24	31.12	54	-22.88	-	-	-	-	72	102	H
3	* ** 17.73209	49.4	PK-U	41.6	-33.5	0	57.5	-	-	74	-16.5	-	-	0	351	H
	* ** 17.73246	36.66	ADV	41.6	-33.5	.24	45	54	-9	-	-	-	-	0	351	H
5	* ** 11.73976	52.71	PK-U	38.5	-41.9	0	49.31	-	-	74	-24.69	-	-	129	327	V
	* ** 11.74089	39.71	ADV	38.5	-42	.24	36.45	54	-17.55	-	-	-	-	129	327	V
6	* ** 16.08937	50.18	PK-U	41.3	-36.9	0	54.58	-	-	74	-19.42	-	-	233	183	V
	* ** 16.08981	37.58	ADV	41.3	-36.9	.24	42.22	54	-11.78	-	-	-	-	233	183	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

10.1.11. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.6 GHz BAND

1TX External Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

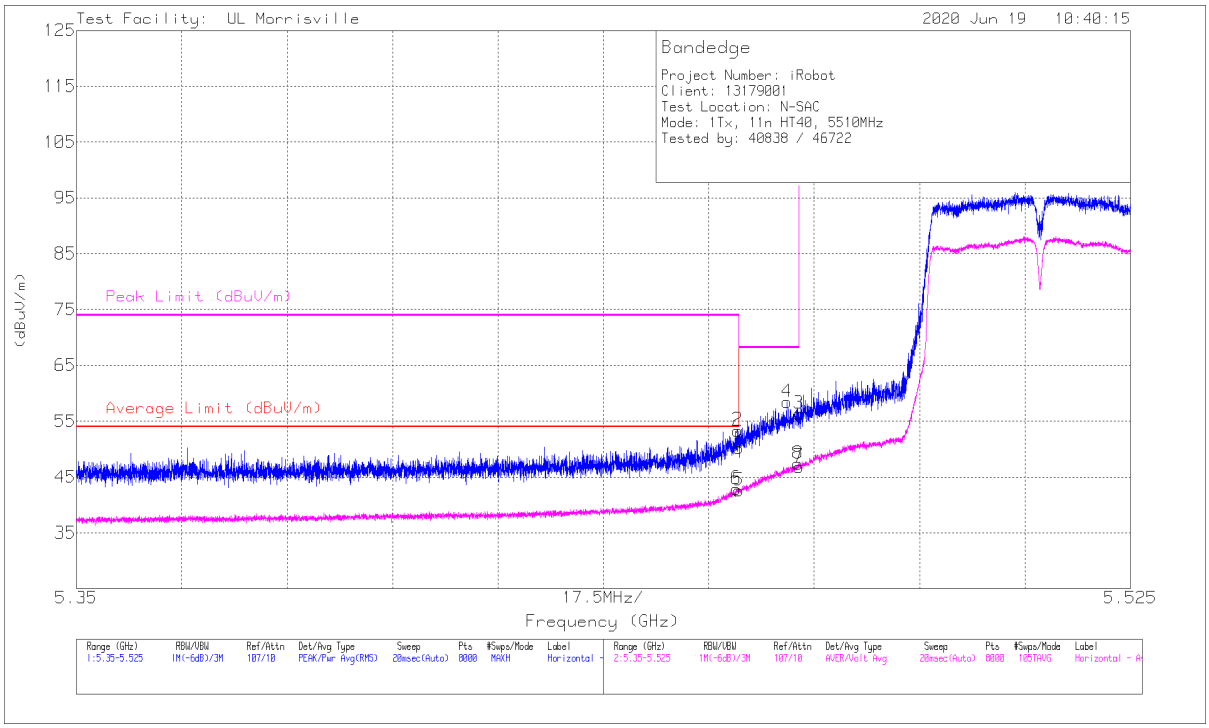

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.79	Pk	34.4	-22	0	50.19	-	-	74	-23.81	49	108	H
2	* ** 5.45981	40.95	Pk	34.4	-22	0	53.35	-	-	74	-20.65	49	108	H
5	* ** 5.45998	29.73	ADV	34.4	-22	.47	42.60	54	-11.40	-	-	49	108	H
6	* ** 5.45952	30.01	ADV	34.4	-22	.47	42.88	54	-11.12	-	-	49	108	H
4	5.46797	46.06	Pk	34.4	-22	0	58.46	-	-	68.2	-9.74	49	108	H
8	5.4698	34.49	ADV	34.4	-22	.47	47.36	-	-	-	-	49	108	H
3	5.46998	43.86	Pk	34.4	-21.9	0	56.36	-	-	68.2	-11.84	49	108	H
7	5.46998	33.85	ADV	34.4	-21.9	.47	46.82	-	-	-	-	49	108	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

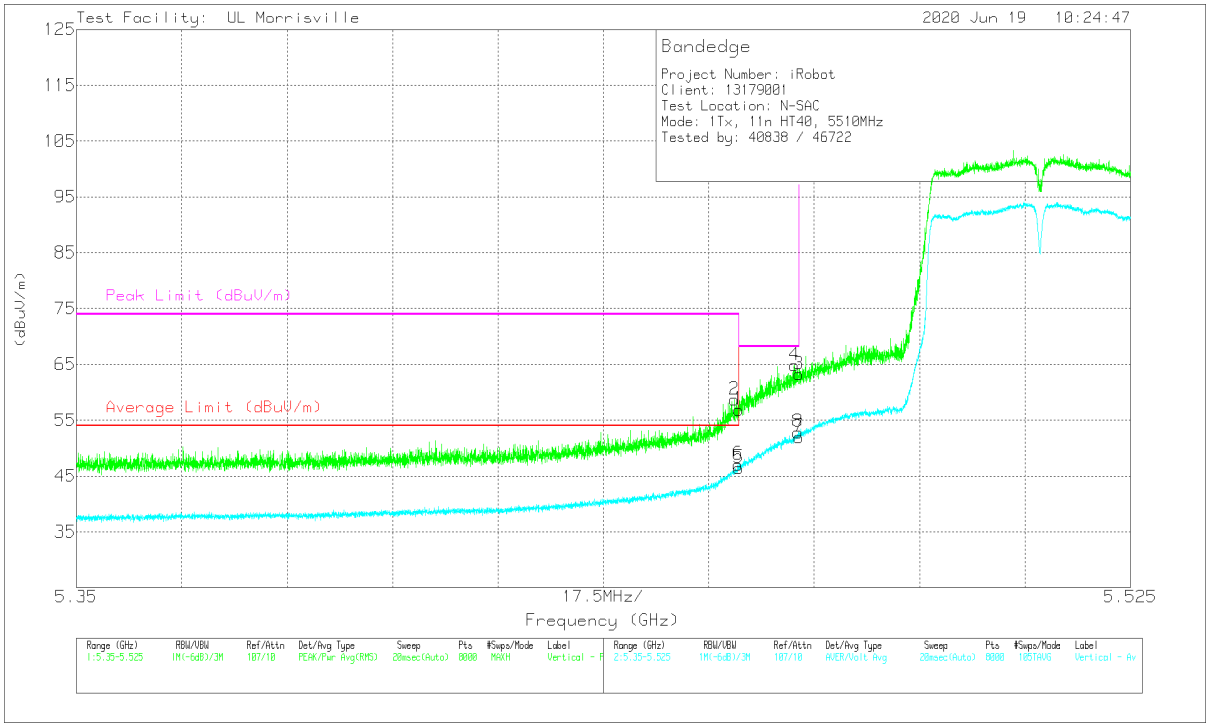

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	44.5	Pk	34.4	-22	0	56.9	-	-	74	-17.1	30	102	V
2	* ** 5.45924	46.31	Pk	34.4	-22	0	58.71	-	-	74	-15.29	30	102	V
5	* ** 5.45998	33.57	ADV	34.4	-22	.47	46.44	54	-7.56	-	-	30	102	V
6	* ** 5.45983	34.2	ADV	34.4	-22	.47	47.07	54	-6.93	-	-	30	102	V
4	5.46921	52.44	Pk	34.4	-22	0	64.84	-	-	68.2	-3.36	30	102	V
8	5.4698	39.98	ADV	34.4	-22	.47	52.86	-	-	-	-	30	102	V
3	5.46998	50.77	Pk	34.4	-21.9	0	63.27	-	-	68.2	-4.93	30	102	V
7	5.46998	39.02	ADV	34.4	-21.9	.47	52	-	-	-	-	30	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

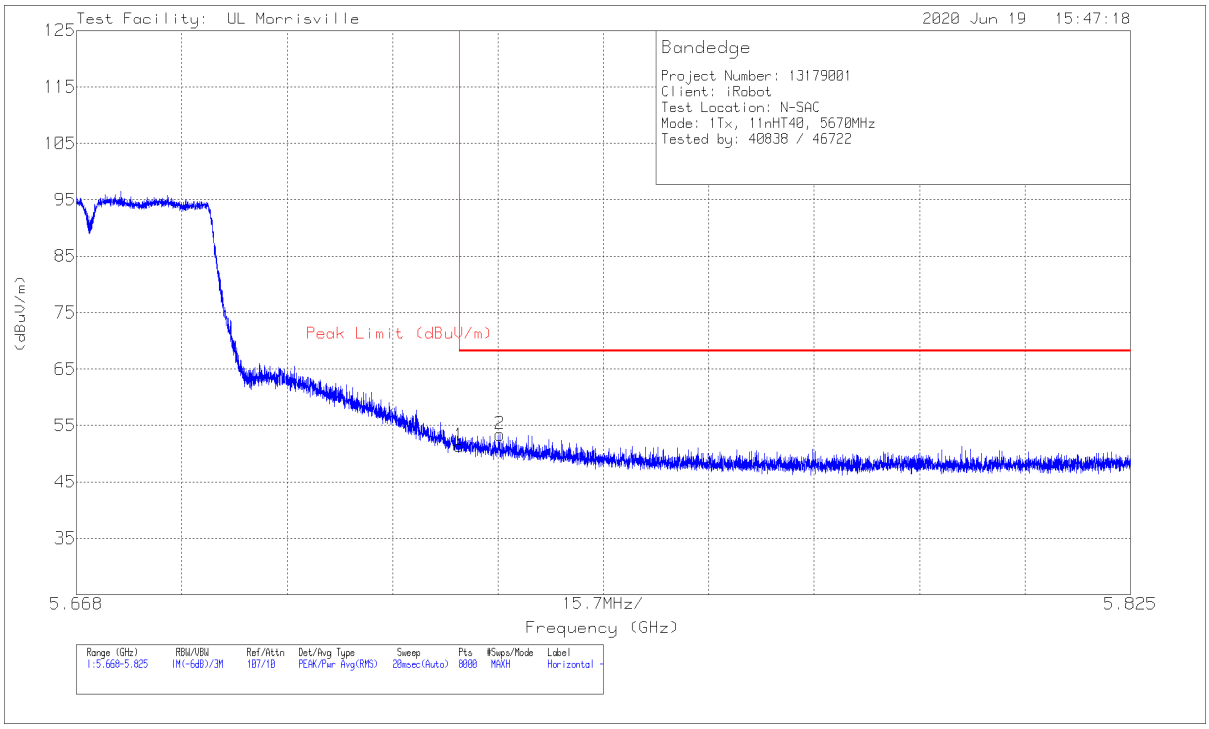

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	38.61	Pk	34.6	-21.8	0	51.41	68.2	-16.79	45	112	H
2	5.73108	40.51	Pk	34.7	-21.8	0	53.41	68.2	-14.79	45	112	H

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

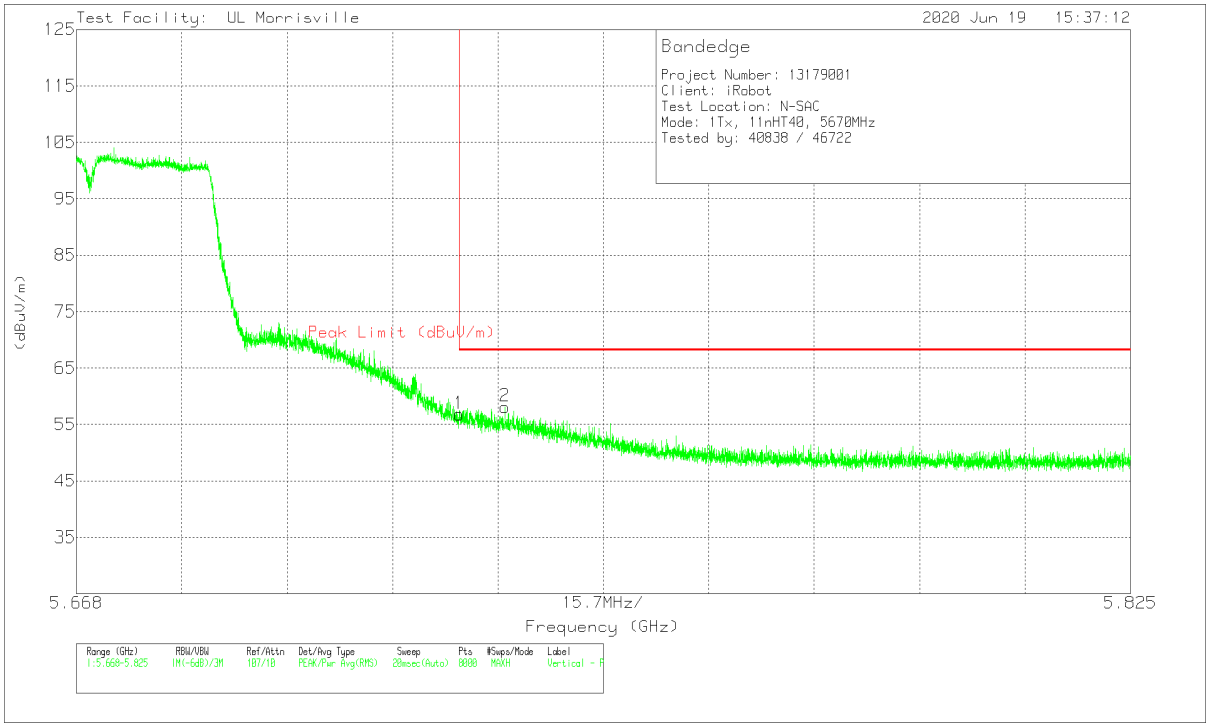

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	44.01	Pk	34.6	-21.8	0	56.81	68.2	-11.39	290	105	V
2	5.73183	45.24	Pk	34.7	-21.8	0	58.14	68.2	-10.06	290	105	V

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

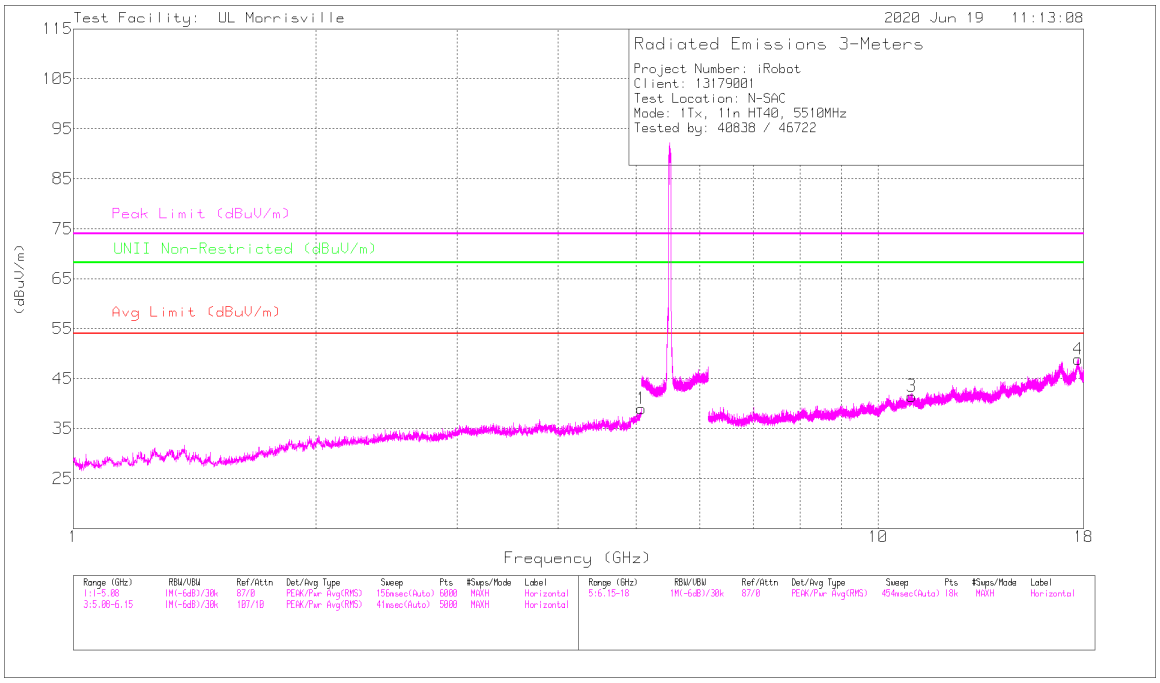

HORIZONTAL

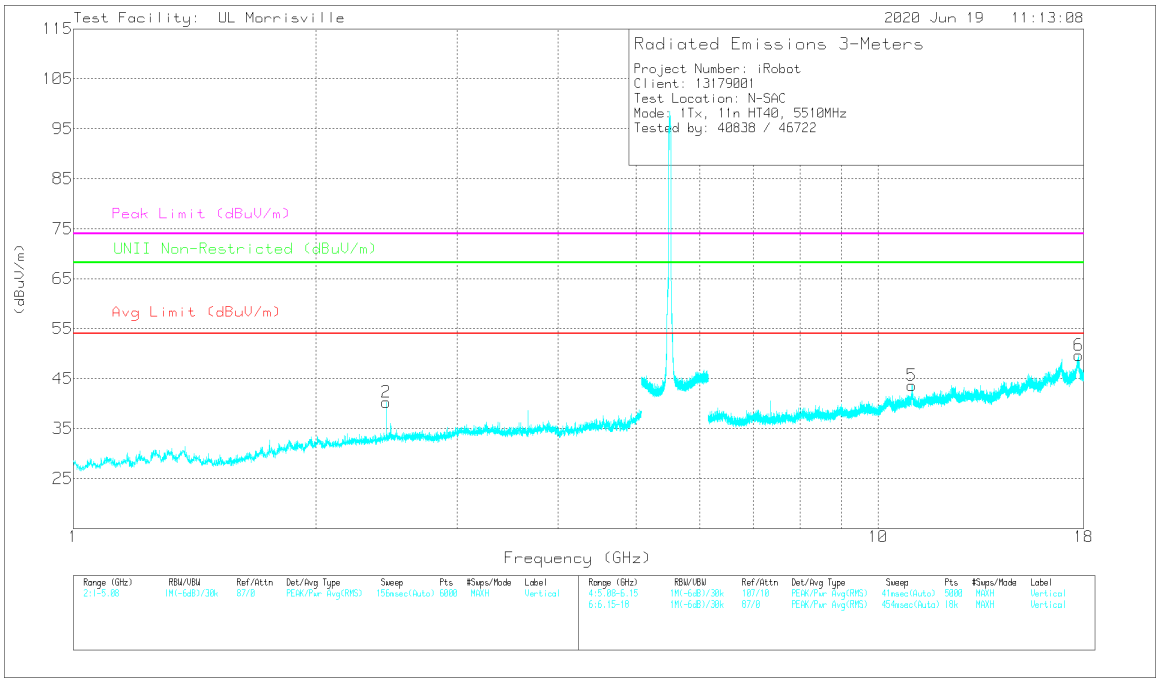

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.07557	40.39	PK-U	34.2	-29.4	0	45.19	-	-	74	-28.81	-	-	187	134	H
	* ** 5.07544	27.36	ADV	34.2	-29.4	.47	32.63	54	-21.37	-	-	-	-	187	134	H
3	* ** 11.01105	35.15	PK-U	37.9	-25.2	0	47.85	-	-	74	-26.15	-	-	41	120	H
	* ** 11.01325	22.67	ADV	37.9	-25.2	.47	35.84	54	-18.16	-	-	-	-	41	120	H
4	* ** 17.7374	33.32	PK-U	41.7	-19.7	0	55.32	-	-	74	-18.68	-	-	16	400	H
	* ** 17.7378	21.05	ADV	41.7	-19.7	.47	43.52	54	-10.48	-	-	-	-	16	400	H
5	* ** 11.00996	37.16	PK-U	37.9	-25.2	0	49.86	-	-	74	-24.14	-	-	133	192	V
	* ** 11.01024	23.82	ADV	37.9	-25.2	.47	36.99	54	-17.01	-	-	-	-	133	192	V
6	* ** 17.74002	33.64	PK-U	41.7	-19.8	0	55.54	-	-	74	-18.46	-	-	254	129	V
	* ** 17.743	21.2	ADV	41.7	-19.8	.47	43.57	54	-10.43	-	-	-	-	254	129	V
2	2.44652	42.68	PK-U	32.1	-33.6	0	41.18	-	-	-	-	68.2	-27.02	221	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

MID CHANNEL RESULTS

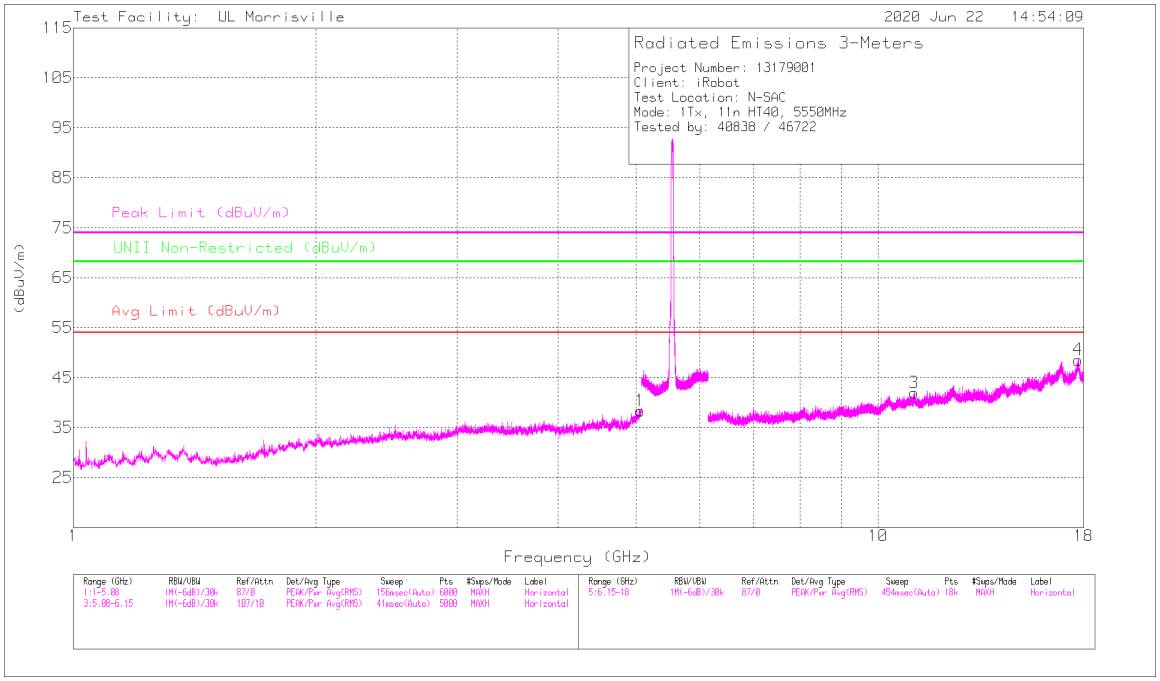

HORIZONTAL

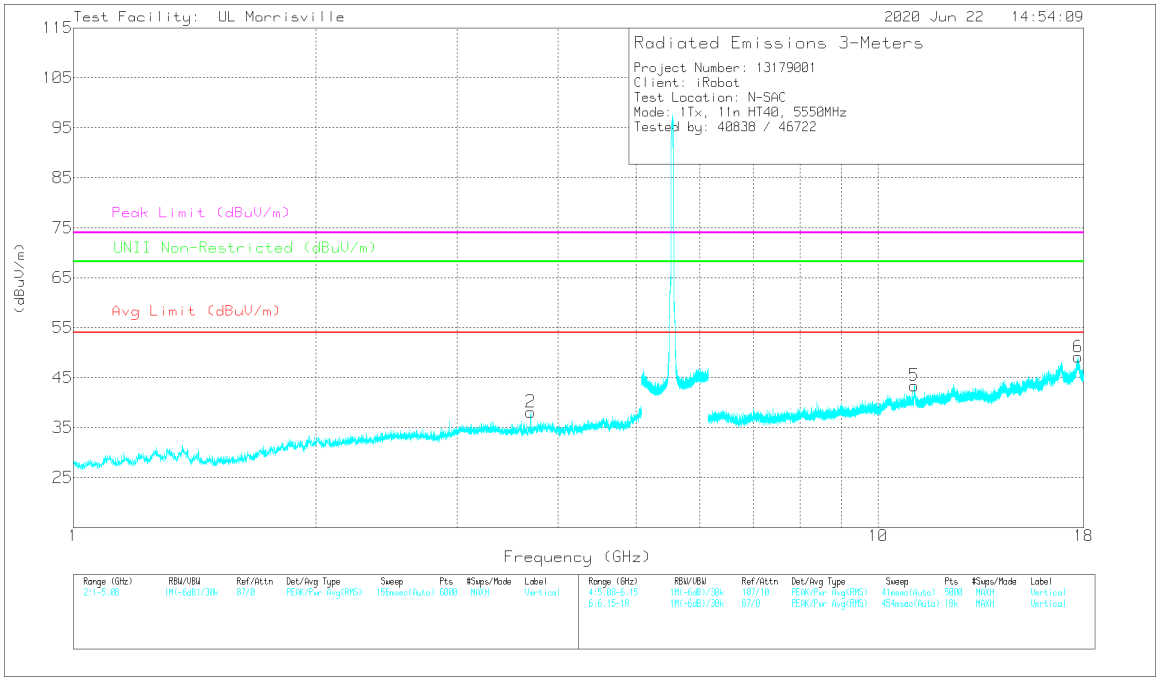

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.06108	40.45	PK-U	34.2	-30.2	0	44.45	-	-	74	-29.55	-	-	81	335	H
	* ** 5.06104	28.04	ADV	34.2	-30.2	.47	32.51	54	-21.49	-	-	-	-	81	335	H
2	* ** 3.70002	43.5	PK-U	33.1	-32.2	0	44.4	-	-	74	-29.6	-	-	50	273	V
	* ** 3.69999	34.7	ADV	33.1	-32.2	.47	36.07	54	-17.93	-	-	-	-	50	273	V
3	* ** 11.08932	35.08	PK-U	37.9	-25.4	0	47.58	-	-	74	-26.42	-	-	221	383	H
	* ** 11.09047	22.4	ADV	37.9	-25.4	.47	35.37	54	-18.63	-	-	-	-	221	383	H
4	* ** 17.72731	33.81	PK-U	41.7	-19.7	0	55.81	-	-	74	-18.19	-	-	239	234	H
	* ** 17.72704	20.86	ADV	41.7	-19.7	.47	43.33	54	-10.67	-	-	-	-	239	234	H
5	* ** 11.08722	37.1	PK-U	37.9	-25.4	0	49.6	-	-	74	-24.4	-	-	230	254	V
	* ** 11.08772	24.48	ADV	37.9	-25.4	.47	37.45	54	-16.55	-	-	-	-	230	254	V
6	* ** 17.72647	33.65	PK-U	41.7	-19.8	0	55.55	-	-	74	-18.45	-	-	9	189	V
	* ** 17.72627	20.11	ADV	41.7	-19.8	.47	42.48	54	-11.52	-	-	-	-	9	189	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

HIGH CHANNEL RESULTS

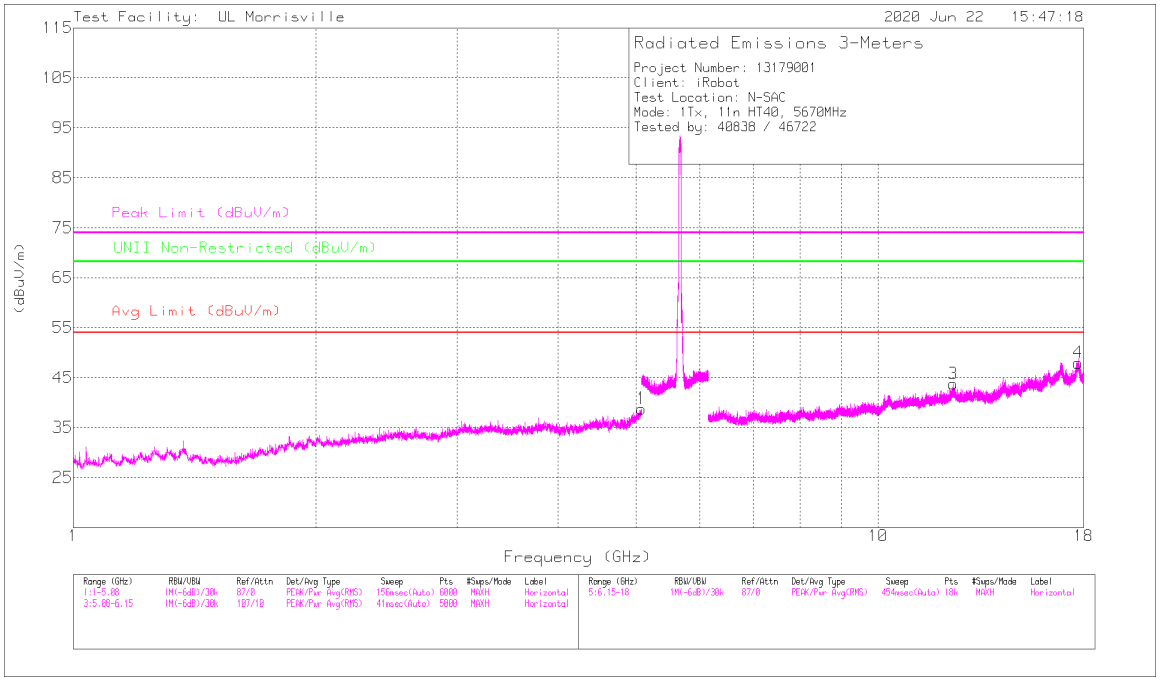

HORIZONTAL

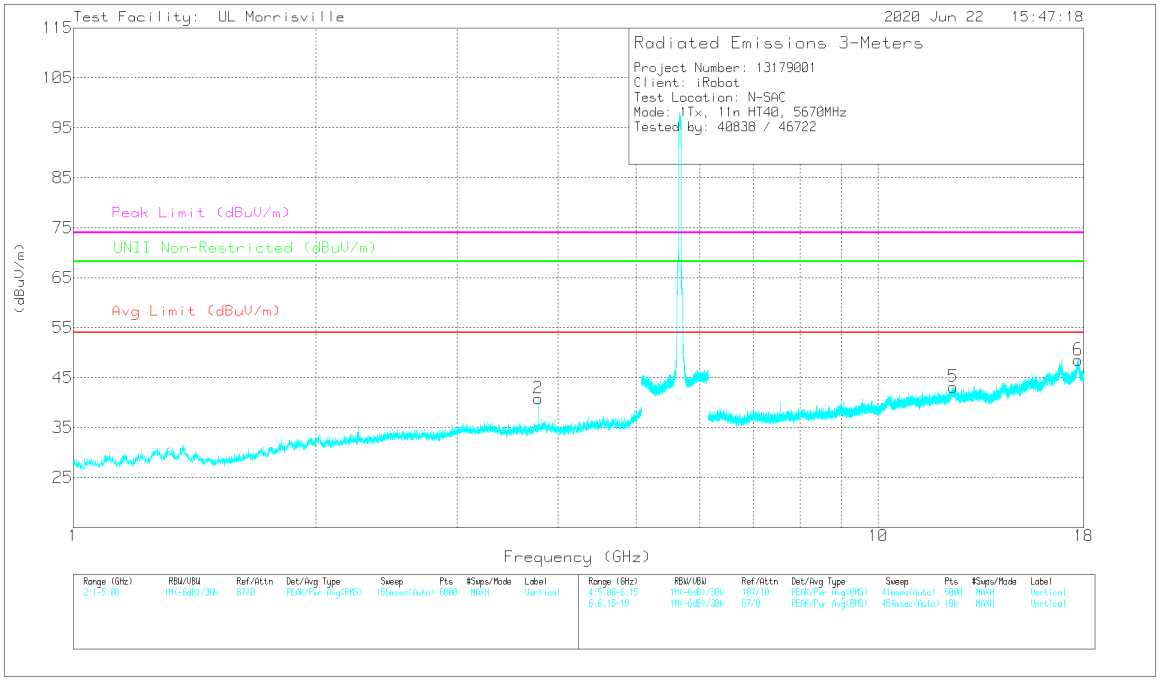

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0072 dB(/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.07919	40.57	PK-U	34.3	-29.1	0	45.77	-	-	74	-28.23	-	-	319	258	H
	* ** 5.07931	27.5	ADV	34.3	-29.1	.47	33.17	54	-20.83	-	-	-	-	319	258	H
2	* ** 3.78006	44.43	PK-U	33.5	-32.5	0	45.43	-	-	74	-28.57	-	-	53	246	V
	* ** 3.77999	37.72	ADV	33.5	-32.5	.47	39.19	54	-14.81	-	-	-	-	53	246	V
3	* ** 12.40449	34.59	PK-U	38.9	-24.3	0	49.19	-	-	74	-24.81	-	-	223	390	H
	* ** 12.40258	22.07	ADV	38.9	-24.3	.47	37.14	54	-16.86	-	-	-	-	223	390	H
4	* ** 17.72694	33.2	PK-U	41.7	-19.7	0	55.2	-	-	74	-18.8	-	-	159	151	H
	* ** 17.72648	20.67	ADV	41.7	-19.8	.47	43.04	54	-10.96	-	-	-	-	159	151	H
5	* ** 12.40261	34.87	PK-U	38.9	-24.3	0	49.47	-	-	74	-24.53	-	-	314	217	V
	* ** 12.40028	22.17	ADV	38.9	-24.3	.47	37.24	54	-16.76	-	-	-	-	314	217	V
6	* ** 17.73171	31.89	PK-U	41.6	-19.7	0	53.79	-	-	74	-20.21	-	-	191	169	V
	* ** 17.73262	19.44	ADV	41.7	-19.7	.47	41.91	54	-12.09	-	-	-	-	191	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

CHANNEL 142 RESULTS

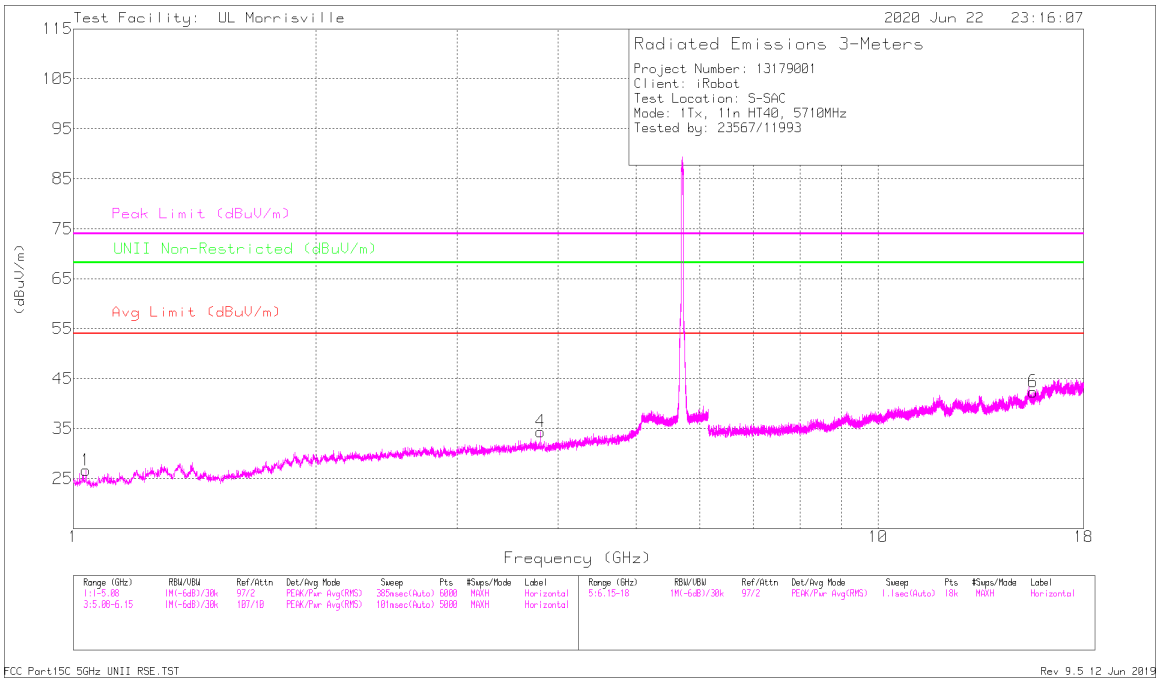

HORIZONTAL

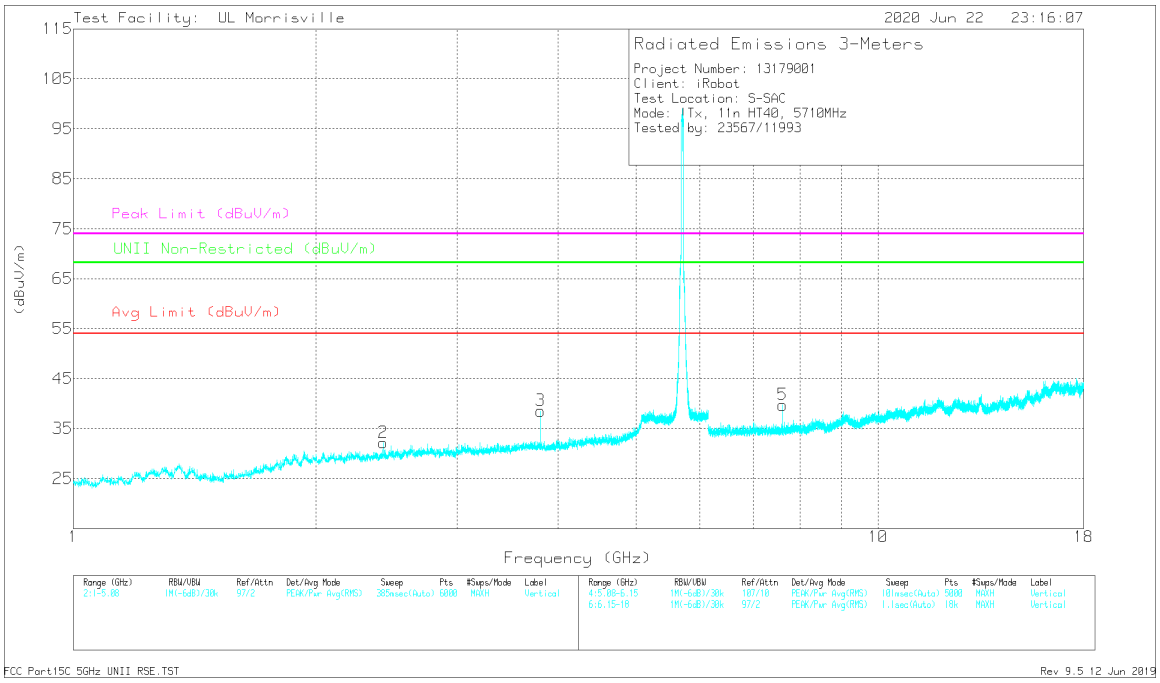

VERTICAL

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA
TEL:(919) 549-1400

This report shall not be reproduced except in full, without the written approval of UL LLC.

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0078 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 1.03669	42.18	PK-U	27	-35.3	0	33.88	-	-	74	-40.12	-	-	15	165	H
	* ** 1.03681	31.49	ADV	27	-35.3	.47	23.66	54	-30.34	-	-	-	-	15	165	H
4	* ** 3.80669	40.37	PK-U	33.3	-32.8	0	40.87	-	-	74	-33.13	-	-	92	155	H
	* ** 3.80665	33.63	ADV	33.3	-32.8	.47	34.60	54	-19.40	-	-	-	-	92	155	H
3	* ** 3.80656	42.16	PK-U	33.3	-32.8	0	42.66	-	-	74	-31.34	-	-	121	105	V
	* ** 3.80665	36.82	ADV	33.3	-32.8	.47	37.79	54	-16.21	-	-	-	-	121	105	V
6	* ** 15.58657	32.5	PK-U	40	-24.3	0	48.2	-	-	74	-25.8	-	-	317	140	H
	* ** 15.58727	22.01	ADV	40	-24.3	.47	38.18	54	-15.82	-	-	-	-	317	140	H
5	* ** 7.61322	37.61	PK-U	35.6	-28	0	45.21	-	-	74	-28.79	-	-	262	101	V
	* ** 7.61329	30.31	ADV	35.6	-28	.47	38.38	54	-15.62	-	-	-	-	262	101	V
2	2.4261	40.95	PK-U	32.1	-34.2	0	38.85	-	-	-	-	68.2	-29.35	113	306	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
PK-U - Maximum Peak
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

1TX PCB Antenna MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

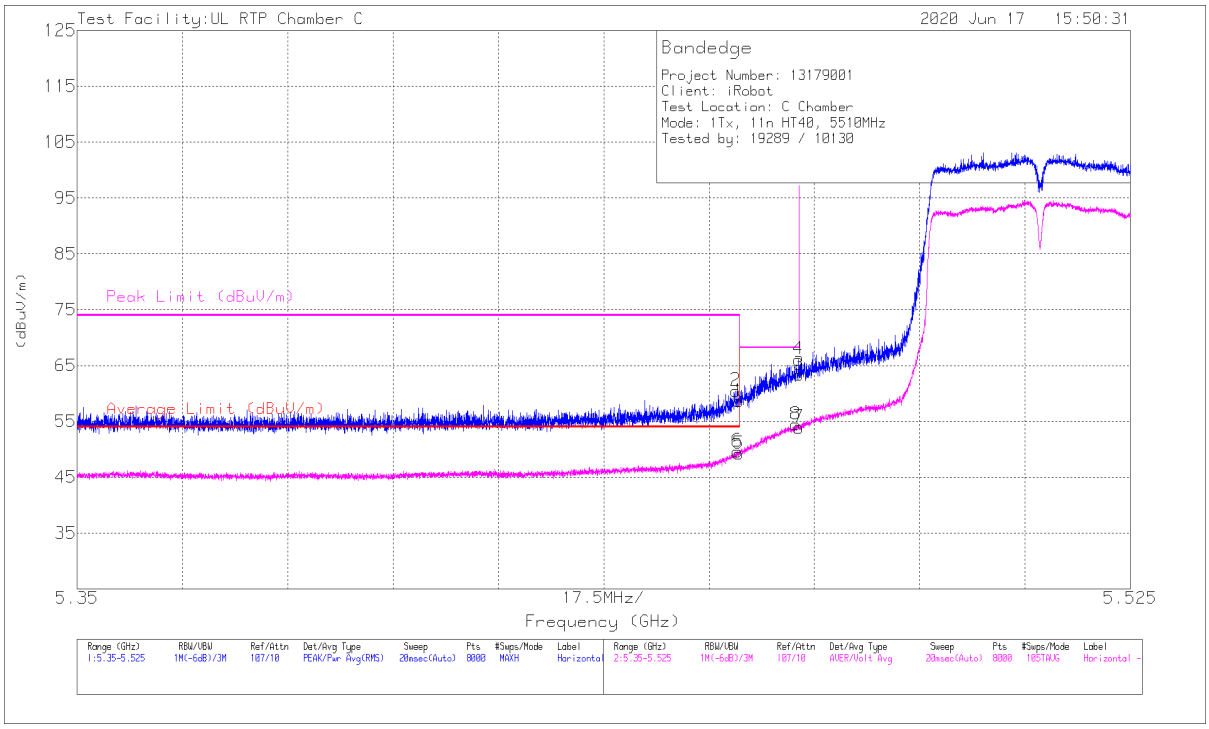

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	39.58	Pk	34.6	-15.6	0	58.58	-	-	74	-15.42	327	107	H
2	* ** 5.45946	41.44	Pk	34.6	-15.6	0	60.44	-	-	74	-13.56	327	107	H
5	* ** 5.45998	29.73	ADV	34.6	-15.6	.47	49.2	54	-4.8	-	-	327	107	H
6	* ** 5.4597	30.15	ADV	34.6	-15.6	.47	49.62	54	-4.38	-	-	327	107	H
8	5.46939	34.76	ADV	34.6	-15.4	.47	54.43	-	-	-	-	327	107	H
4	5.46983	46.89	Pk	34.6	-15.4	0	66.09	-	-	68.2	-2.11	327	107	H
3	5.46998	44.2	Pk	34.6	-15.4	0	63.4	-	-	68.2	-4.8	327	107	H
7	5.46998	34.25	ADV	34.6	-15.4	.47	53.92	-	-	-	-	327	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

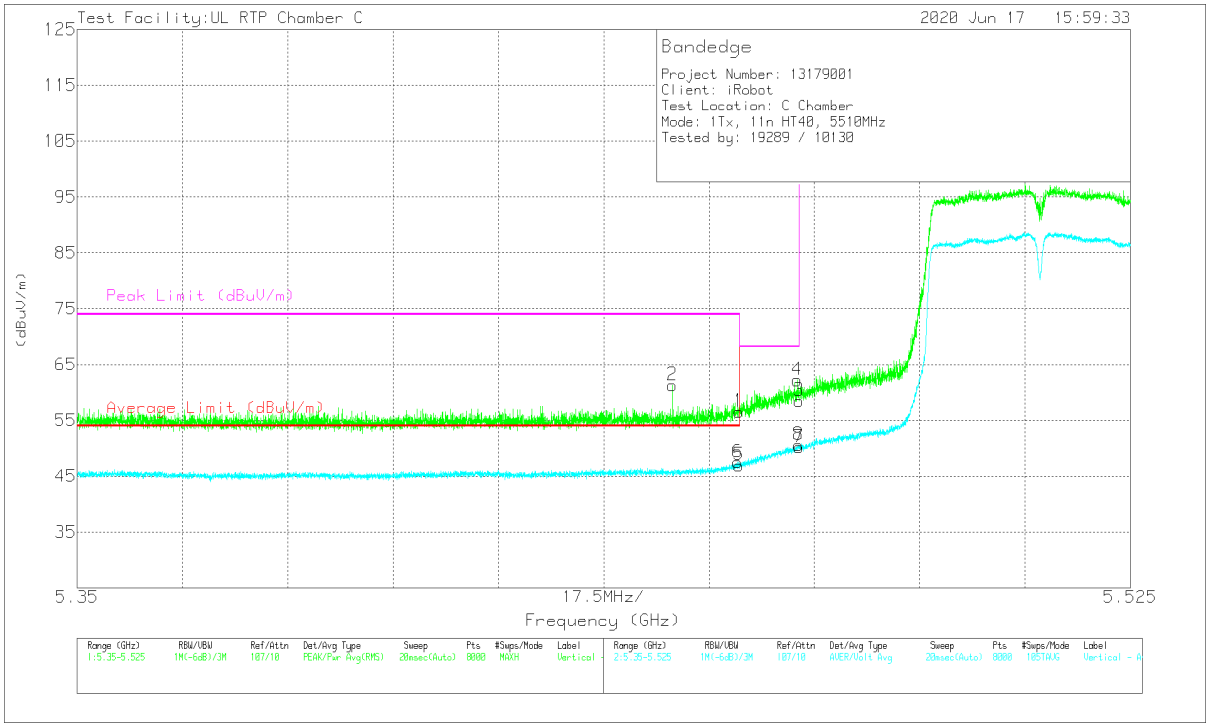

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 5.45998	37.57	Pk	34.6	-15.6	0	56.57	-	-	74	-17.43	100	298	V
2	* ** 5.44891	42.3	Pk	34.6	-15.6	0	61.3	-	-	74	-12.7	100	298	V
5	* ** 5.45998	27.5	ADV	34.6	-15.6	.47	46.97	54	-7.03	-	-	100	298	V
6	* ** 5.45972	28.04	ADV	34.6	-15.6	.47	47.51	54	-6.49	-	-	100	298	V
4	5.46963	43.02	Pk	34.6	-15.4	0	62.22	-	-	68.2	-5.98	100	298	V
8	5.46983	30.92	ADV	34.6	-15.4	.47	50.59	-	-	-	-	100	298	V
3	5.46998	39.29	Pk	34.6	-15.4	0	58.49	-	-	68.2	-9.71	100	298	V
7	5.46998	30.51	ADV	34.6	-15.4	.47	50.18	-	-	-	-	100	298	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
** - indicates frequency in Taiwan NCC LP0002 Restricted Band
Pk - Peak detector
ADV - Linear Voltage Average

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

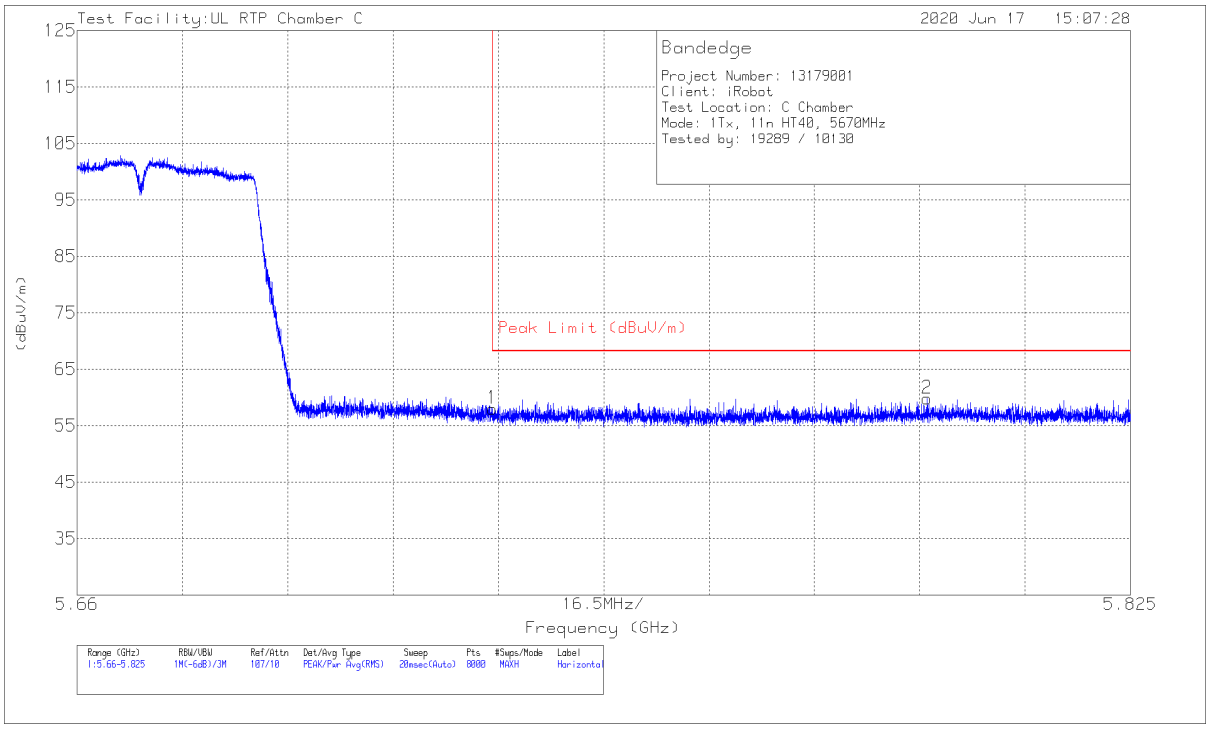

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	38.21	Pk	34.6	-14.8	58.01	68.2	-10.19	2	143	H
2	5.79315	39.31	Pk	34.8	-14.3	59.81	68.2	-8.39	2	143	H

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.

VERTICAL RESULT

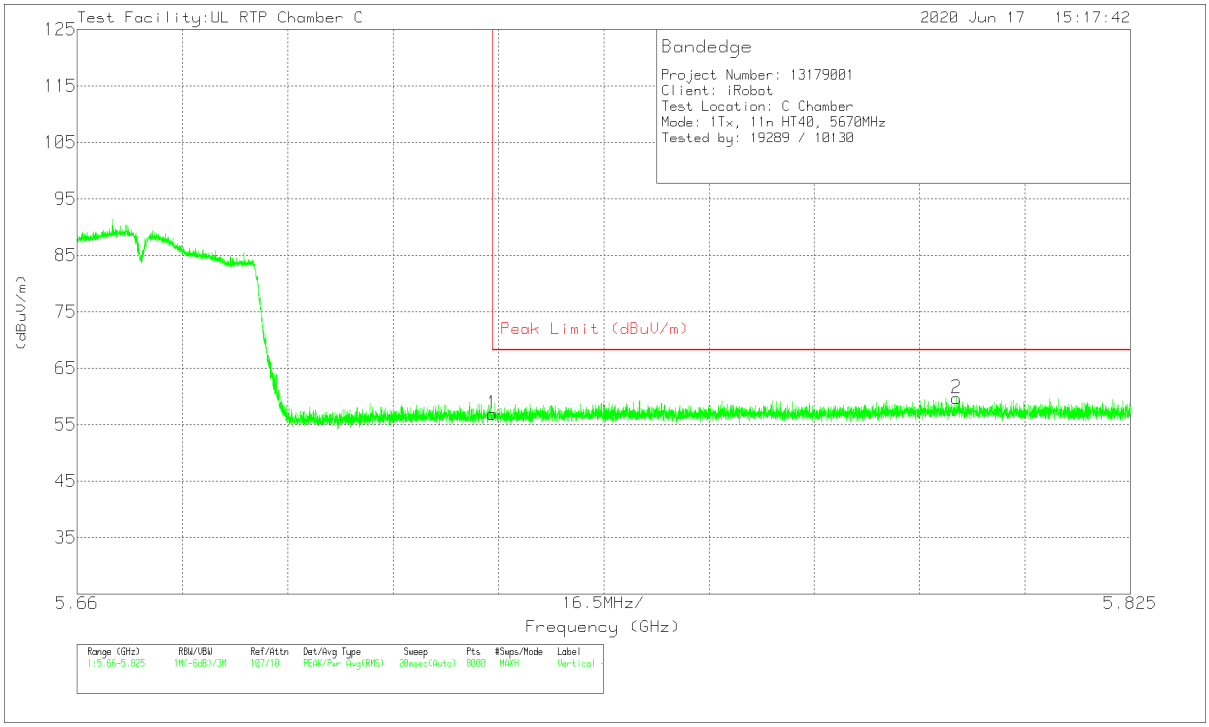

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AT0062 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.72502	37.14	Pk	34.6	-14.8	56.94	68.2	-11.26	352	154	V
2	5.79775	39.1	Pk	34.8	-14.2	59.7	68.2	-8.5	352	154	V

Pk - Peak detector

UL LLC
12 Laboratory Dr., RTP, NC 27709, USA TEL:(919) 549-1400
This report shall not be reproduced except in full, without the written approval of UL LLC.