FCC TEST REPORT

REPORT NO.: RF950803H02
MODEL NO.: LGSF3000
RECEIVED: Aug. 03, 2006
TESTED: Aug. 10 to Sep. 12 , 2006
ISSUED: Sep. 15, 2006

APPLICANT: LITE-In Tech. Co., LTD

ADDRESS: 4F., No. 20, Lane 50, Sec. 3, Nangang Rd.,
Taipei 115,Taiwan (R.O.C)

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

0536

No. 2177-01

TABLE OF CONTENTS

1 CERTIFICATION....4
2 SUMMARY OF TEST RESULTS....5
3 GENERAL INFORMATION....6
3.1 GENERAL DESCRIPTION OF EUT....6
3.2 DESCRIPTION OF TEST MODES....9
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL....10
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS....12
3.5 DESCRIPTION OF SUPPORT UNITS....13
3.6 CONFIGURATION OF SYSTEM UNDER TEST....14
4 TEST PROCEDURES AND RESULTS....15
4.1 CONDUCTED EMISSION MEASUREMENT....15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT....15
4.1.2 TEST INSTRUMENTS....15
4.1.3 TEST PROCEDURES....16
4.1.4 DEVIATION FROM TEST STANDARD....16
4.1.5 TEST SETUP....17
4.1.6 EUT OPERATING CONDITIONS....17
4.1.7 TEST RESULTS-MODE 1....18
4.1.8 TEST RESULTS-MODE 2....20
4.1.9 TEST RESULTS-MODE 3....22
4.1.10 TEST RESULTS-MODE 4....24
4.1.11 TEST RESULTS-MODE 5....26
4.2 NUMBER OF HOPPING FREQUENCY USED....28
4.2.1 LIMIT OF HOPPING FREQUENCY USED....30
4.2.2 TEST INSTRUMENTS....30
4.2.3 TEST PROCEDURES....31
4.2.4 DEVIATION FROM TEST STANDARD....31
4.2.5 TEST SETUP....32
4.2.6 TEST RESULTS....32
4.3 DWELL TIME ON EACH CHANNEL....34
4.3.1 LIMIT OF DWELL TIME USED....34
4.3.2 TEST INSTRUMENTS....34
4.3.3 TEST PROCEDURES....35
4.3.4 DEVIATION FROM TEST STANDARD....35
4.3.5 TEST SETUP....35
4.3.6 TEST RESULTS....36
4.4 CHANNEL BANDWIDTH....40
4.4.1 TEST INSTRUMENTS....40
4.4.2 TEST PROCEDURE....41
4.4.3 DEVIATION FROM TEST STANDARD....41
4.4.4 TEST SETUP....41
4.4.5 EUT OPERATING CONDITION....41

4.4.6 TEST RESULTS 42
4.5 HOPPING CHANNEL SEPARATION 45
4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION 45
4.5.2 TEST INSTRUMENTS 45
4.5.3 TEST PROCEDURES 46
4.5.4 DEVIATION FROM TEST STANDARD 46
4.5.5 TEST SETUP 46
4.5.6 TEST RESULTS 47
4.6 MAXIMUM PEAK OUTPUT POWER 50
4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT 50
4.6.2 INSTRUMENTS 50
4.6.3 TEST PROCEDURES 51
4.6.4 DEVIATION FROM TEST STANDARD 51
4.6.5 TEST SETUP 52
4.6.6 EUT OPERATING CONDITION 52
4.6.7 TEST RESULTS 53
4.7 RADIATED EMISSION MEASUREMENT 56
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT 56
4.7.2 TEST INSTRUMENTS 57
4.7.3 TEST PROCEDURES 58
4.7.4 DEVIATION FROM TEST STANDARD 58
4.7.5 TEST SETUP 59
4.7.6 TEST RESULTS 60
4.8 BAND EDGES MEASUREMENT 64
4.8.1 LIMITS OF BAND EDGES MEASUREMENT 64
4.8.2 TEST INSTRUMENTS 64
4.8.3 TEST PROCEDURE 64
4.8.4 DEVIATION FROM TEST STANDARD 64
4.8.5 EUT OPERATING CONDITION 65
4.8.6 TEST RESULTS 65
4.9 ANTENNA REQUIREMENT 67
4.9.1 STANDARD APPLICABLE 67
4.9.2 ANTENNA CONNECTED CONSTRUCTION 67
5 PHOTOGRAPHS OF THE TEST CONFIGURATION 68
6 INFORMATION ON THE TESTING LABORATORIES 71

1 CERTIFICATION

PRODUCT :	Bluetooth GPS Receiver
BRAND NAME :	Lite-in
MODEL NO. :	LGSF3000
APPLICANT :	LITE-In Tech. Co., LTD
TESTED DATE:	Aug. 10 to Sep. 12 , 2006
TEST ITEM :	MASS-PRODUCTION
STANDARDS :	47 CFR Part 15, Subpart C (Section 15.247), ANSI C63.4-2003

The above equipment (Model: LGSF3000) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : _____ , **DATE:** Sep. 15, 2006
(Midoli Peng)

TECHNICAL ACCEPTANCE : _____ , **DATE:** Sep. 15, 2006
Responsible for RF
(Hank Chung)

APPROVED BY : _____ , **DATE:** Sep. 15, 2006
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	**Test Type and Limit**	**Result**	**REMARK**
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is –12.12dB at 0.455 MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or two-thirds of 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is –0.1dB at 2496.00MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth GPS Receiver
MODEL NO.	LGSF3000
FCC ID	UH6-LGSF3000
POWER SUPPLY	3.7VDC from battery or DC 5V from power adapter or DC 5V from Car Charger
MODULATION TYPE	GFSK
MODULATION TECHNOLOGY	FHSS
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	3.451 mW
ANTENNA TYPE	For Bluetooth: built-in ceramic antenna, Gain 2dBi (typical) For GPS: internal passive antenna MMCX connect to internal antenna
DATA CABLE	USB cable (1.5m/Unshielded /Brand name : CHENTAI) USB cable (1.2m/Unshielded/Brand name : Semdicar)
I/O PORTS	USB port x1
ASSOCIATED DEVICES	Car Charger x 2 Li-ion Battery x 1 Power adapter x 2 USB Data Cable x 2

NOTE:

1. The EUT consist of Bluetooth device and GPS receiver.
2. This test report was prepared for Bluetooth device.

3. The EUT could be supplied with Li-ion 3.7V battery or the following power adapter and Car Charger:

Adapter 1:	
Brand:	CHENTAI
Model No.:	CT-0505WU
Input power :	100-240V, 0.15A, 50-60Hz
Output power :	5.0V, 1.0A, 5.0W
Adapter 2:	
Brand:	Semdicar Technology Corporation
Model No.:	TC-FU-USB
Input power :	100-240V, 0.15A, 50-60Hz
Output power :	5.0V, 1.0A
Car Charger 1:	
Brand:	CHENTAI
Model No.:	CC-0103
Input power :	12V-24V
Output power :	DC 5.0V 850mA
Car Charger 2:	
Brand:	Semdicar Technology Corporation
Model No.:	M027060
Input power :	12V-24V
Output power :	DC 5.0V 850mA
Battery 2:	
Brand:	Helix
Model No.:	HXE-W01
Rating:	3.7V, 1100mAh

4. The EUT was pre-tested in chamber as the following test modes:

For transmitter radiated emissions	
Test Mode	**Power source**
Mode A	With Battery
Mode B	With Adapter 1
Mode C	With Adapter 2
Mode D	**With Battery + Adapter 1**
Mode E	With Battery + Adapter 2
Mode F	With Car Charger 1
Mode G	With Car Charger 2
Mode H	With Battery + Car Charger 1
Mode I	With Battery + Car Charger 2
Mode J	With Battery + USB cable 1
Mode K	With Battery + USB cable 2
Mode L	With DC from Notebook computer

The worst transmitter radiated emissions was found in Mode D. The final test was executed under test mode with highest emission and recorded in this report individually.

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

NOTE:
The EUT was tested with the following modes:

For AC power conducted emission	
Test Mode	**Power source**
Mode 1	With Adapter 1
Mode 2	With Adapter 2
Mode 3	With Battery + Adapter 1
Mode 4	With Battery + Adapter 2
Mode 5	With USB cable 1
Mode 6	With USB cable 2
For other tests	
Test Mode	**Power source**
Mode 1	With Battery + Adapter 1

3.3 Test Mode Applicability and tested channel detail

EUT CONFIGURE MODE	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where **PLC:** Power Line Conducted Emission **RE<1G:** Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz **APCM:** Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	78	FHSS	GFSK	DH5

RADIATED EMISSION TEST (BELOW 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	78	FHSS	GFSK	DH5

RADIATED EMISSION TEST (ABOVE 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 78	FHSS	GFSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types.

☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
0 to 78	0, 39, 78	FHSS	GFSK	DH5

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth GPS Receiver. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	Notebook Computer	DELL	PP19L	CN-OHC416-70166-5CA-0448	PIW632500516610

No.	Signal cable description
1	NA

Note: 1. All power cords of the above support units are unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

For conducted emission (Mode 1~4):
For other test modes:

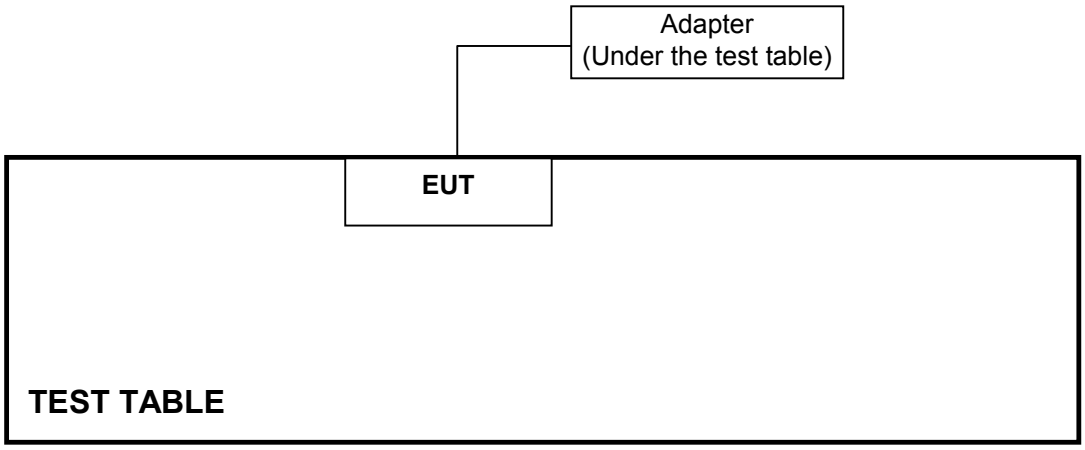

For conducted emission (Mode 5):

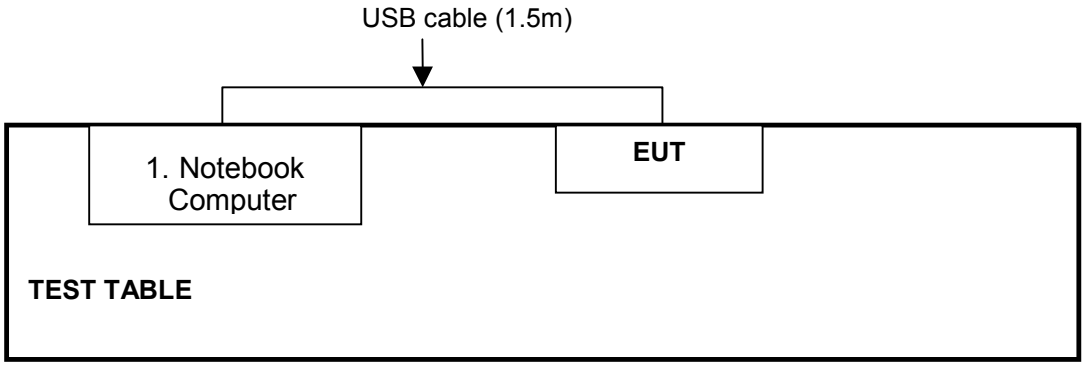

For conducted emission (Mode 6):

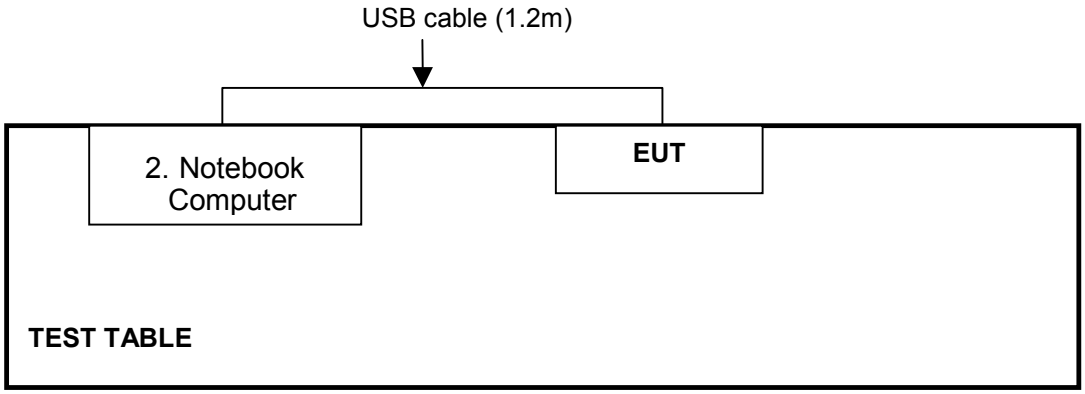

NOTE: 1. Please refer to the photos of test configuration in Item 5 also.

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*Test Receiver	ESCS 30	847124/029	Dec. 15, 2006
*Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 10, 2006
*Line-Impedance Stabilization Network(for Peripheral)	KNW-407	8/1395/12	Jul. 19, 2007
* RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2006
*Terminator	50	2	Oct. 08, 2006
*Software	ADT_Cond_V7.3.2	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3 The VCCI Con B Registration No. is C-2193.
4 * = These equipment are used for the final measurement.
5 The measurement uncertainty is 2.26 dB, which is calculated as per the document CISPR 16-4 This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.1.3 TEST PROCEDURES

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

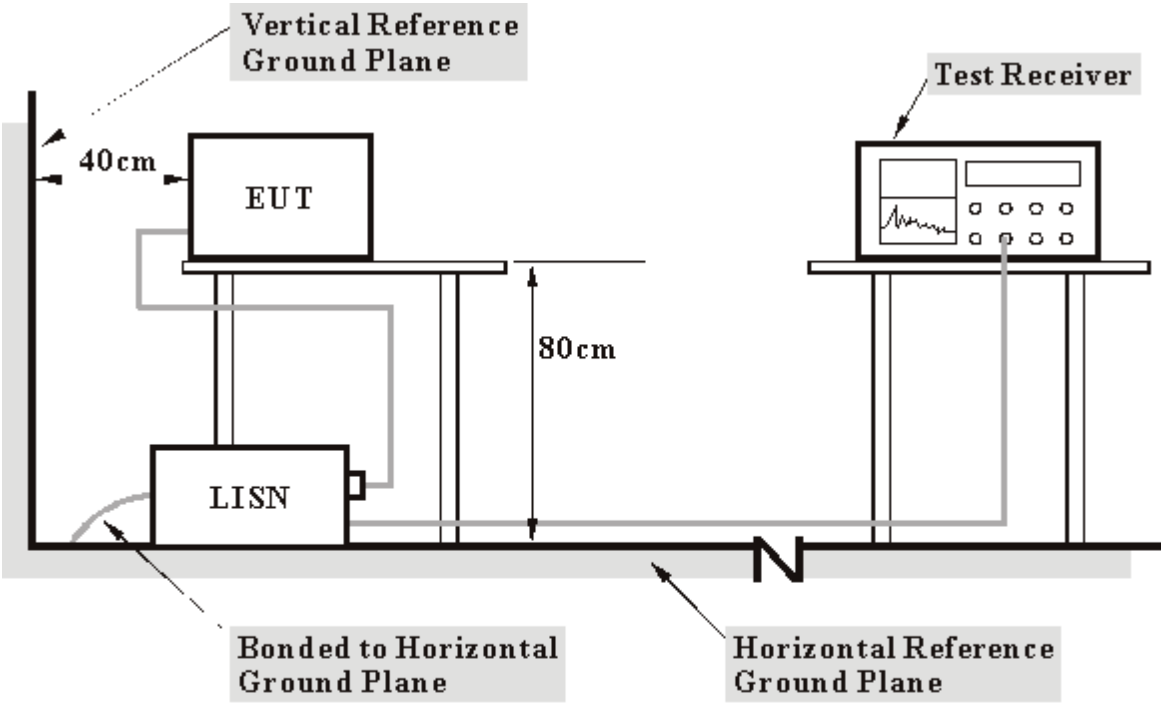

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

For conducted emission (Mode 1~4):
For other test modes:

a. Set the EUT under transmission / receiver condition continuously at specific channel frequency.

For conducted emission (Mode 5~6):

a. Placed the EUT on the testing table.

b. The support unit 1 (Notebook computer) ran a test program “Blue test” to enable EUT under transmission condition continuously at specific channel frequency.

4.1.7 TEST RESULTS-MODE 1

TEST MODE	Mode 1	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62%RH, 960 hPa	**TESTED BY**	Sky Liao

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.240	9.60	33.75	-	43.35	-	62.10	52.10	-18.75	-
2	0.548	9.60	29.63	-	39.23	-	56.00	46.00	-16.77	-
3	0.724	9.60	27.37	-	36.97	-	56.00	46.00	-19.03	-
4	0.963	9.60	23.98	-	33.58	-	56.00	46.00	-22.42	-
5	1.482	9.65	23.32	-	32.97	-	56.00	46.00	-23.03	-
6	2.263	9.70	20.60	-	30.30	-	56.00	46.00	-25.70	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

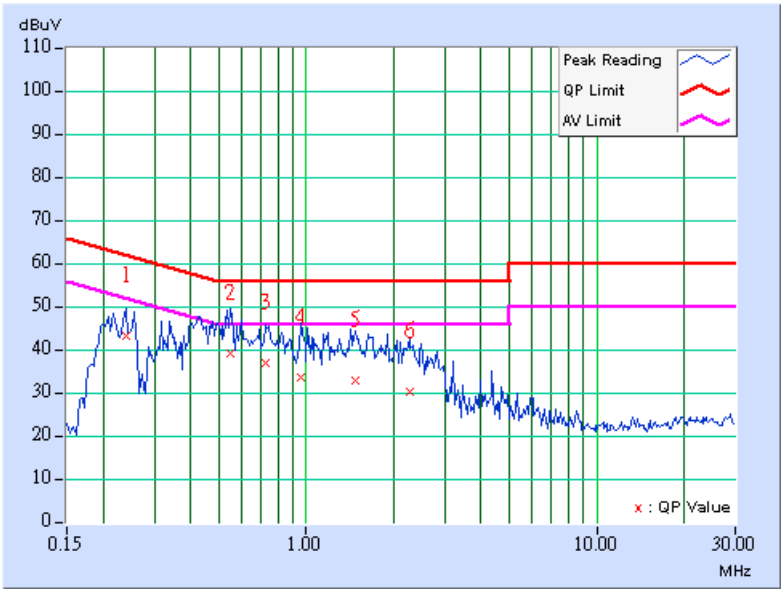

TEST MODE	Mode 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62%RH, 960 hPa	TESTED BY	Sky Liao

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.244	9.60	32.94	-	42.54	-	61.97	51.97	-19.43	-
2	0.423	9.60	32.61	-	42.21	-	57.38	47.38	-15.17	-
3	0.603	9.60	29.69	-	39.29	-	56.00	46.00	-16.71	-
4	0.873	9.60	26.77	-	36.37	-	56.00	46.00	-19.63	-
5	1.529	9.65	24.74	-	34.39	-	56.00	46.00	-21.61	-
6	2.216	9.70	22.23	-	31.93	-	56.00	46.00	-24.07	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

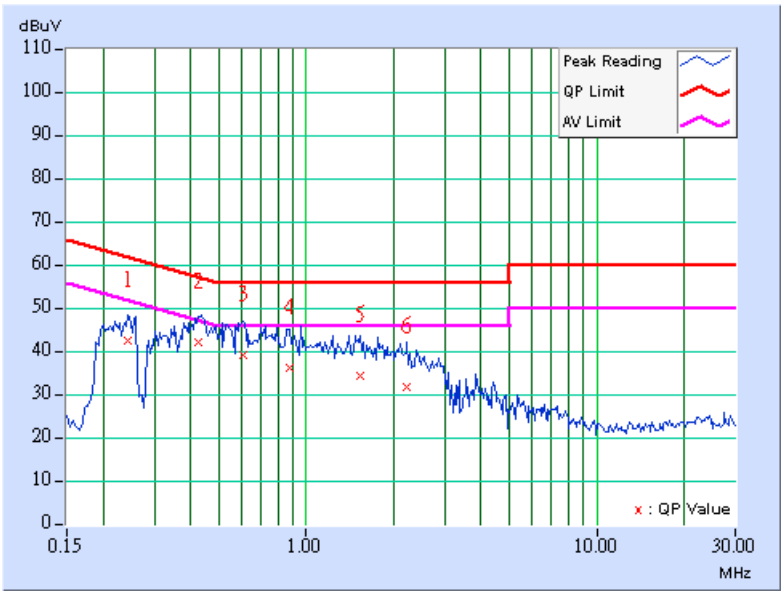

4.1.8 TEST RESULTS-MODE 2

TEST MODE	Mode 2	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 960 hPa	**TESTED BY**	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	9.60	17.59	-	27.19	-	66.00	56.00	-38.81	-
2	0.240	9.60	25.94	-	35.54	-	62.10	52.10	-26.56	-
3	0.689	9.60	20.81	-	30.41	-	56.00	46.00	-25.59	-
4	1.525	9.65	12.75	-	22.40	-	56.00	46.00	-33.60	-
5	6.523	9.78	4.07	-	13.85	-	60.00	50.00	-46.15	-
6	7.508	9.82	4.05	-	13.87	-	60.00	50.00	-46.13	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

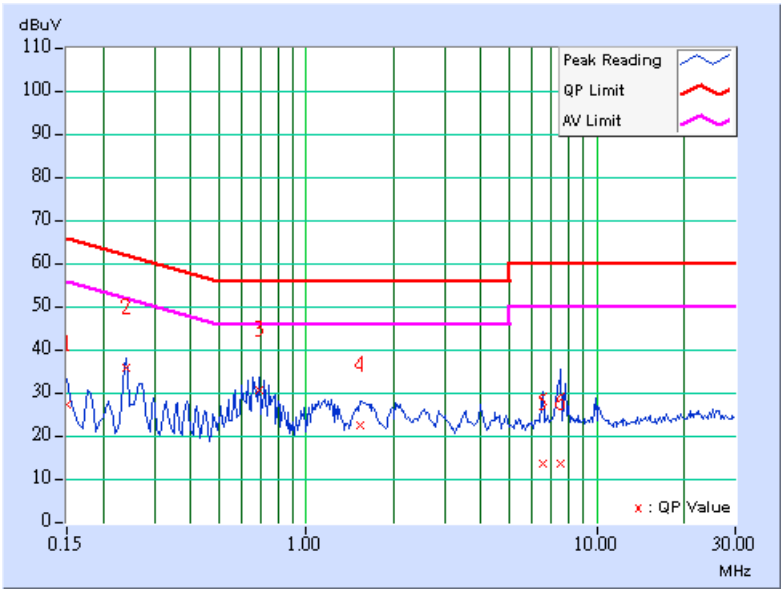

TEST MODE	Mode 2	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 960 hPa	TESTED BY	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	9.60	23.11	-	32.71	-	64.61	54.61	-31.90	-
2	0.240	9.60	26.85	-	36.45	-	62.10	52.10	-25.65	-
3	0.568	9.60	21.88	-	31.48	-	56.00	46.00	-24.52	-
4	1.166	9.62	22.59	-	32.21	-	56.00	46.00	-23.79	-
5	1.615	9.66	21.94	-	31.60	-	56.00	46.00	-24.40	-
6	2.541	9.70	18.09	-	27.79	-	56.00	46.00	-28.21	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

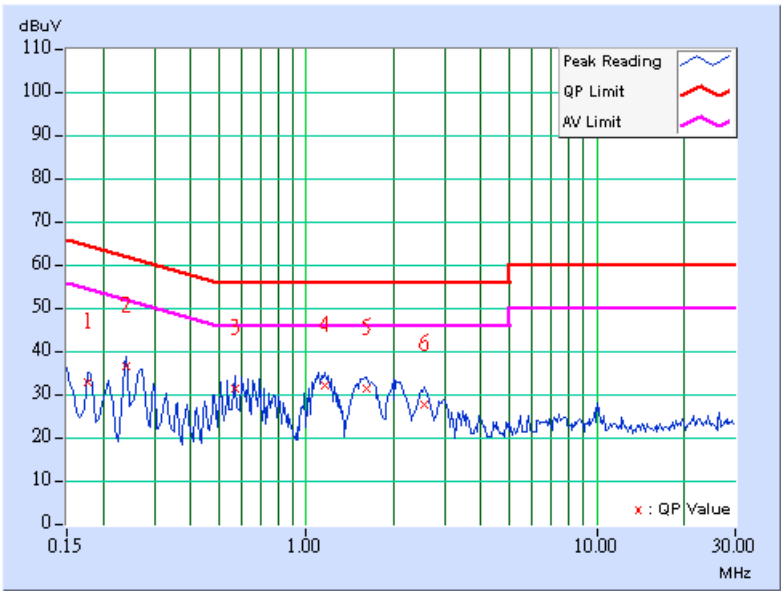

4.1.9 TEST RESULTS-MODE 3

TEST MODE	Mode 3	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62%RH, 960 hPa	**TESTED BY**	Sky Liao

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	9.60	35.41	-	45.01	-	62.66	52.66	-17.65	-
2	0.345	9.60	30.52	-	40.12	-	59.07	49.07	-18.95	-
3	**0.455**	**9.60**	**35.07**	**-**	**44.67**	**-**	**56.79**	**46.79**	**-12.12**	**-**
4	0.896	9.60	29.05	-	38.65	-	56.00	46.00	-17.35	-
5	1.361	9.64	28.18	-	37.82	-	56.00	46.00	-18.18	-
6	2.021	9.70	25.21	-	34.91	-	56.00	46.00	-21.09	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

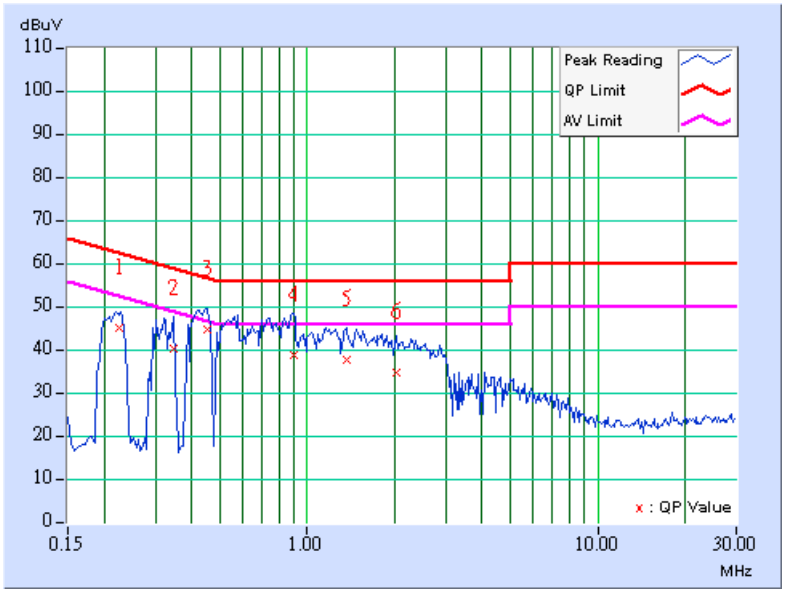

TEST MODE	Mode 3	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 62%RH, 960 hPa	TESTED BY	Sky Liao

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	9.60	33.85	-	43.45	-	62.66	52.66	-19.21	-
2	0.318	9.60	30.59	-	40.19	-	59.76	49.76	-19.57	-
3	0.416	9.60	33.17	-	42.77	-	57.54	47.54	-14.77	-
4	0.537	9.60	31.91	-	41.51	-	56.00	46.00	-14.49	-
5	0.845	9.60	27.19	-	36.79	-	56.00	46.00	-19.21	-
6	1.486	9.65	24.41	-	34.06	-	56.00	46.00	-21.94	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

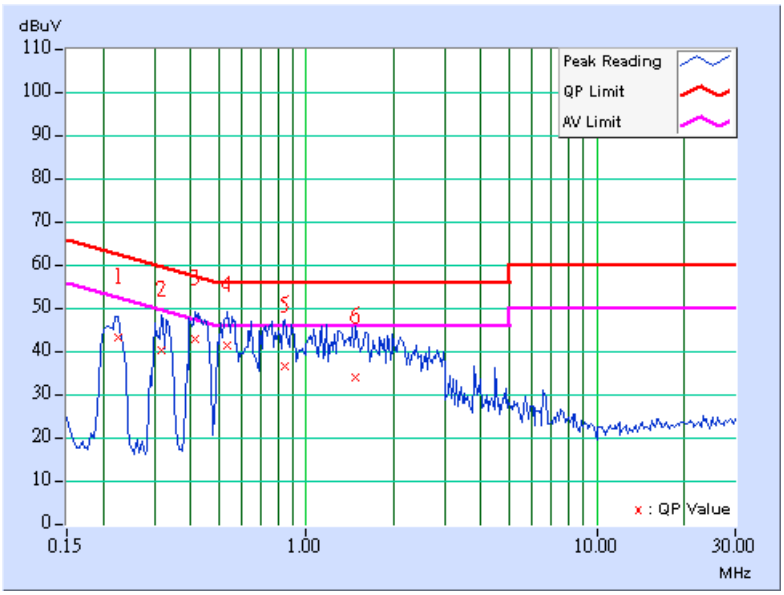

4.1.10 TEST RESULTS-MODE 4

TEST MODE	Mode 4	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 960 hPa	**TESTED BY**	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	9.60	16.39	-	25.99	-	66.00	56.00	-40.01	-
2	0.240	9.60	25.65	-	35.25	-	62.10	52.10	-26.85	-
3	0.689	9.60	20.09	-	29.69	-	56.00	46.00	-26.31	-
4	1.552	9.66	13.00	-	22.66	-	56.00	46.00	-33.34	-
5	6.422	9.78	4.63	-	14.41	-	60.00	50.00	-45.59	-
6	7.742	9.82	3.45	-	13.27	-	60.00	50.00	-46.73	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

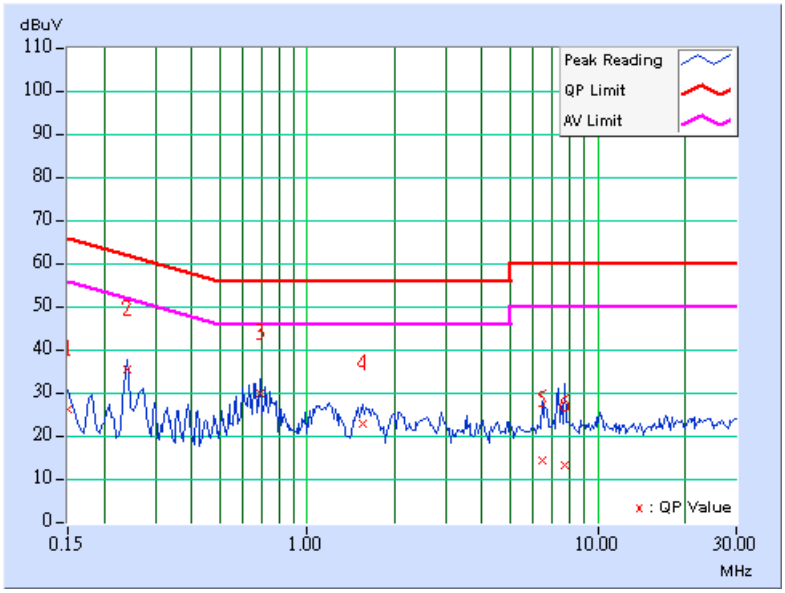

TEST MODE	Mode 4	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 960 hPa	TESTED BY	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	9.60	22.99	-	32.59	-	66.00	56.00	-33.41	-
2	0.240	9.60	26.79	-	36.39	-	62.10	52.10	-25.71	-
3	0.271	9.60	23.22	-	32.82	-	61.08	51.08	-28.26	-
4	0.568	9.60	21.66	-	31.26	-	56.00	46.00	-24.74	-
5	1.166	9.62	22.45	-	32.07	-	56.00	46.00	-23.93	-
6	2.033	9.70	21.04	-	30.74	-	56.00	46.00	-25.26	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

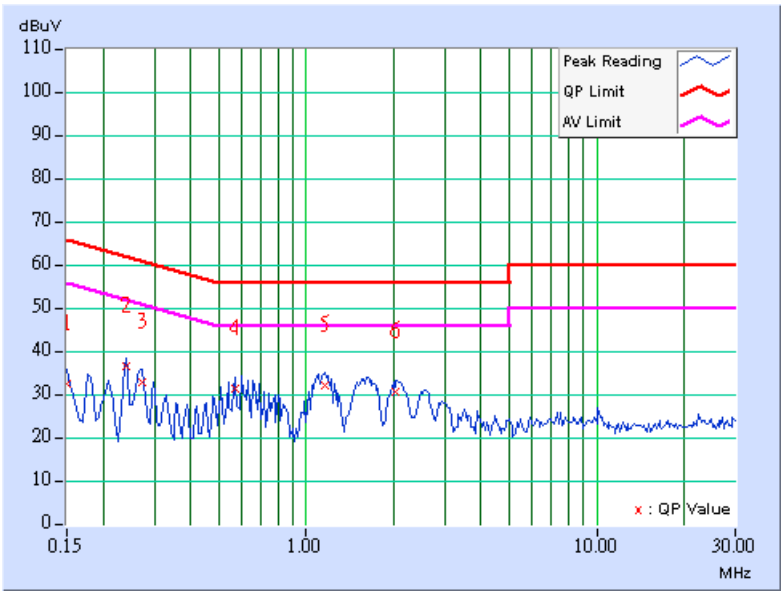

4.1.11 TEST RESULTS-MODE 5

TEST MODE	Mode 5	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 960 hPa	**TESTED BY**	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	9.60	35.48	-	45.08	-	65.79	55.79	-20.71	-
2	0.177	9.60	34.62	-	44.22	-	64.61	54.61	-20.39	-
3	0.220	9.60	28.88	-	38.48	-	62.81	52.81	-24.33	-
4	1.728	9.67	19.61	-	29.28	-	56.00	46.00	-26.72	-
5	2.978	9.70	17.61	-	27.31	-	56.00	46.00	-28.69	-
6	3.719	9.70	22.06	-	31.76	-	56.00	46.00	-24.24	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

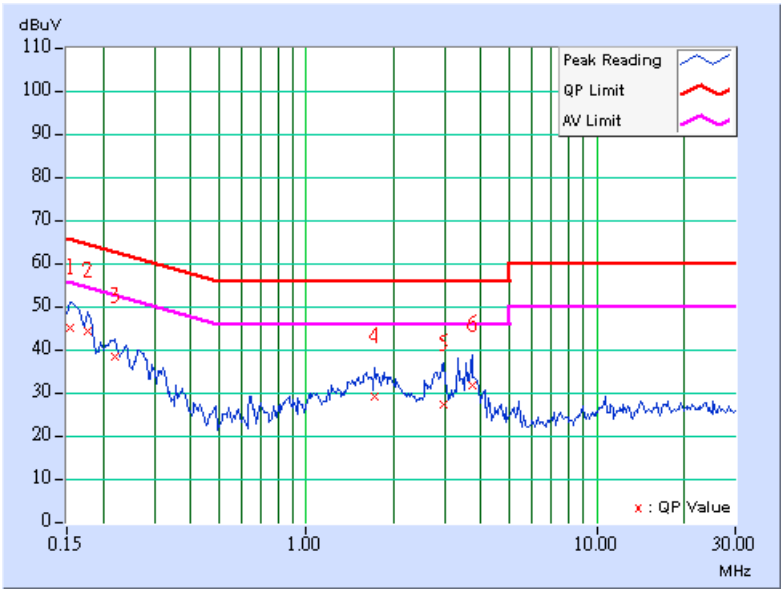

TEST MODE	Mode 5	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	27 deg. C, 59%RH, 960 hPa	TESTED BY	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	9.60	39.02	-	48.62	-	65.58	55.58	-16.96	-
2	0.216	9.60	32.38	-	41.98	-	62.96	52.96	-20.98	-
3	0.271	9.60	28.75	-	38.35	-	61.08	51.08	-22.73	-
4	0.322	9.60	25.71	-	35.31	-	59.66	49.66	-24.35	-
5	2.818	9.70	16.33	-	26.03	-	56.00	46.00	-29.97	-
6	3.684	9.70	23.02	-	32.72	-	56.00	46.00	-23.28	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

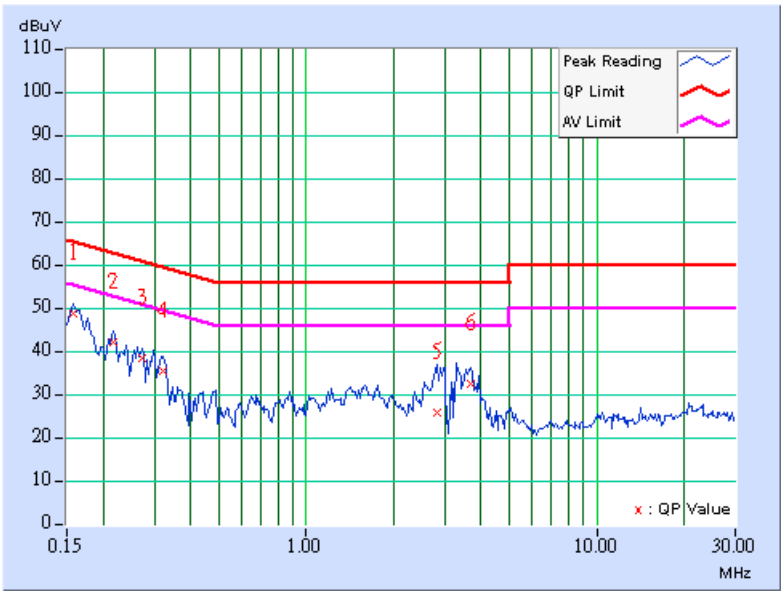

4.1.12 TEST RESULTS-MODE 6

TEST MODE	Mode 6	**6dB BANDWIDTH**	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**PHASE**	Line (L)
ENVIRONMENTAL CONDITIONS	22 deg. C, 80%RH, 960 hPa	**TESTED BY**	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	9.60	35.48	-	45.08	-	65.79	55.79	-20.71	-
2	0.177	9.60	34.20	-	43.80	-	64.61	54.61	-20.81	-
3	0.220	9.60	28.77	-	38.37	-	62.81	52.81	-24.44	-
4	1.728	9.67	20.30	-	29.97	-	56.00	46.00	-26.03	-
5	2.978	9.70	18.65	-	28.35	-	56.00	46.00	-27.65	-
6	3.719	9.70	22.19	-	31.89	-	56.00	46.00	-24.11	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

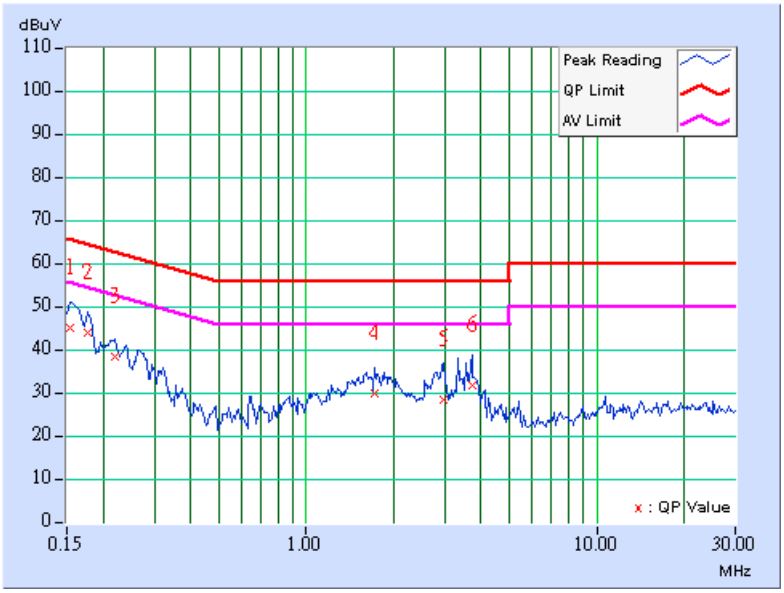

TEST MODE	Mode 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	22 deg. C, 60%RH, 960 hPa	TESTED BY	Tony Chen

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	9.60	39.02	-	48.62	-	65.58	55.58	-16.96	-
2	0.216	9.60	33.28	-	42.88	-	62.96	52.96	-20.08	-
3	0.271	9.60	29.76	-	39.36	-	61.08	51.08	-21.72	-
4	0.322	9.60	26.20	-	35.80	-	59.66	49.66	-23.86	-
5	2.818	9.70	17.35	-	27.05	-	56.00	46.00	-28.95	-
6	3.684	9.70	24.02	-	33.72	-	56.00	46.00	-22.28	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

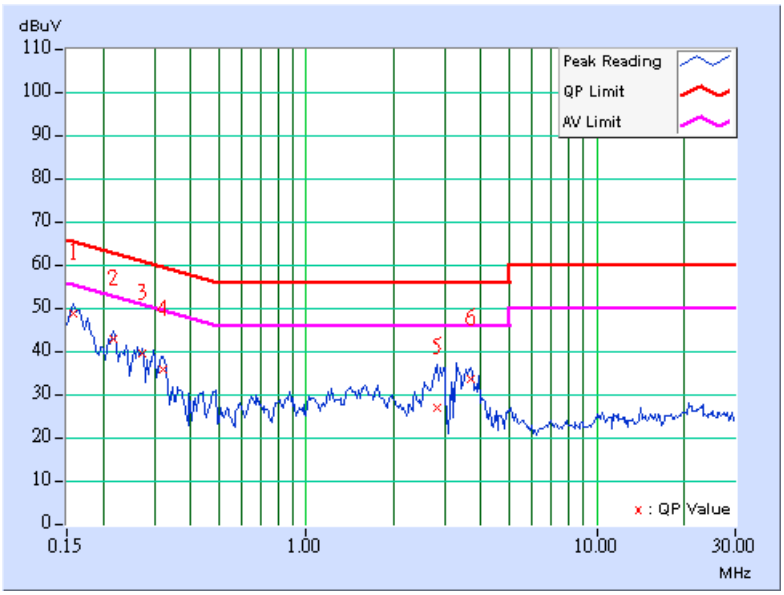

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2006

Note:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP



4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

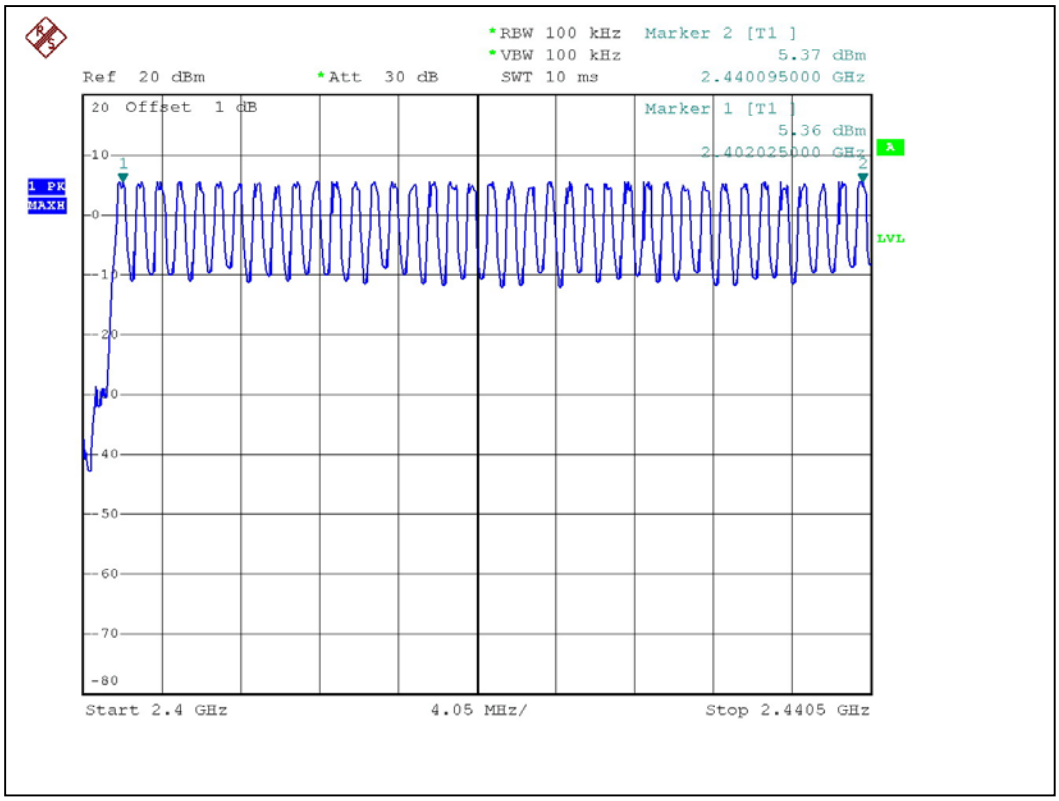
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 2 [T1]
5.37 dBm
2.440095000 GHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
Marker 1 [T1]
5.36 dBm
2.402025000 GHz
1 PK
MAXH
LVL
Start 2.4 GHz
4.05 MHz/
Stop 2.4405 GHz

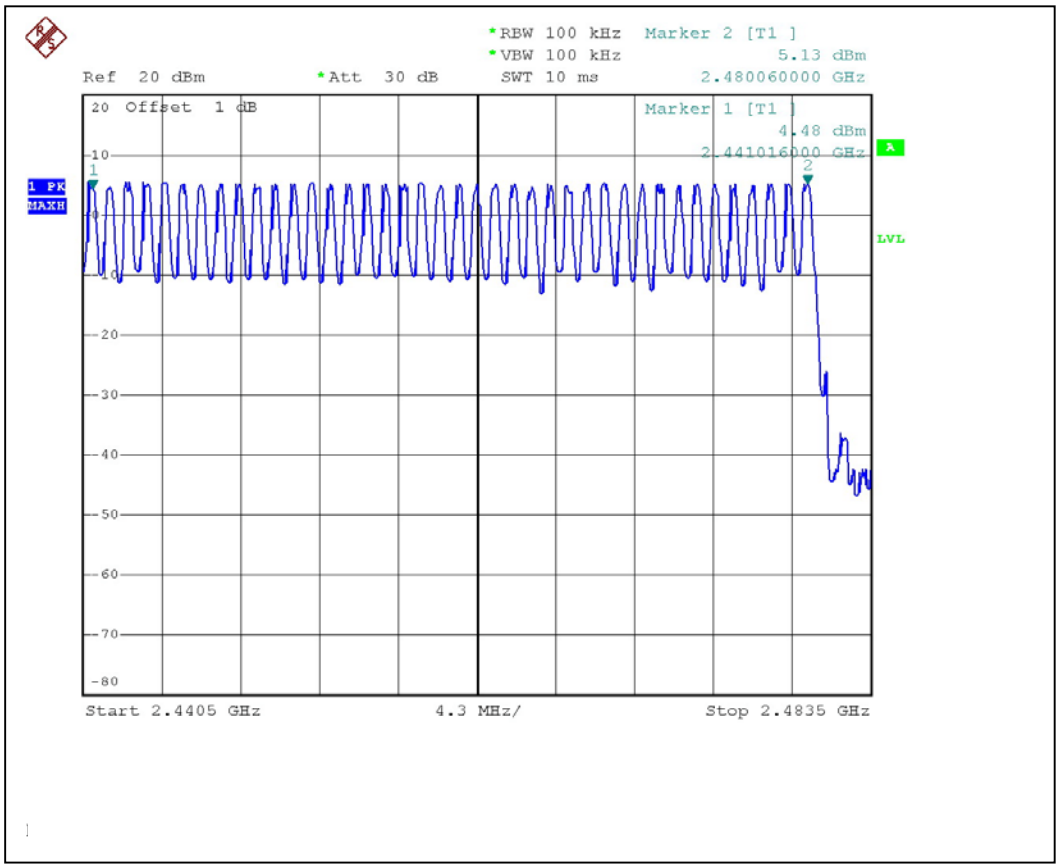
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 2 [T1]
5.13 dBm
2.480060000 GHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
Marker 1 [T1]
4.48 dBm
2.441016000 GHz
1 PK
MAXH
LVL
Start 2.4405 GHz
4.3 MHz/
Stop 2.4835 GHz

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2006

Note:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

4.3.6 TEST RESULTS

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	51 (times / 5 sec) *6.32=322.32 times	0.45	145.04	400
DH3	25 (times / 5 sec) *6.32=158.00 times	1.71	270.18	400
DH5	17 (times / 5 sec) *6.32=107.44 times	2.99	321.46	400

Test plots of the transmitting time slot are shown on next three pages.

DH1

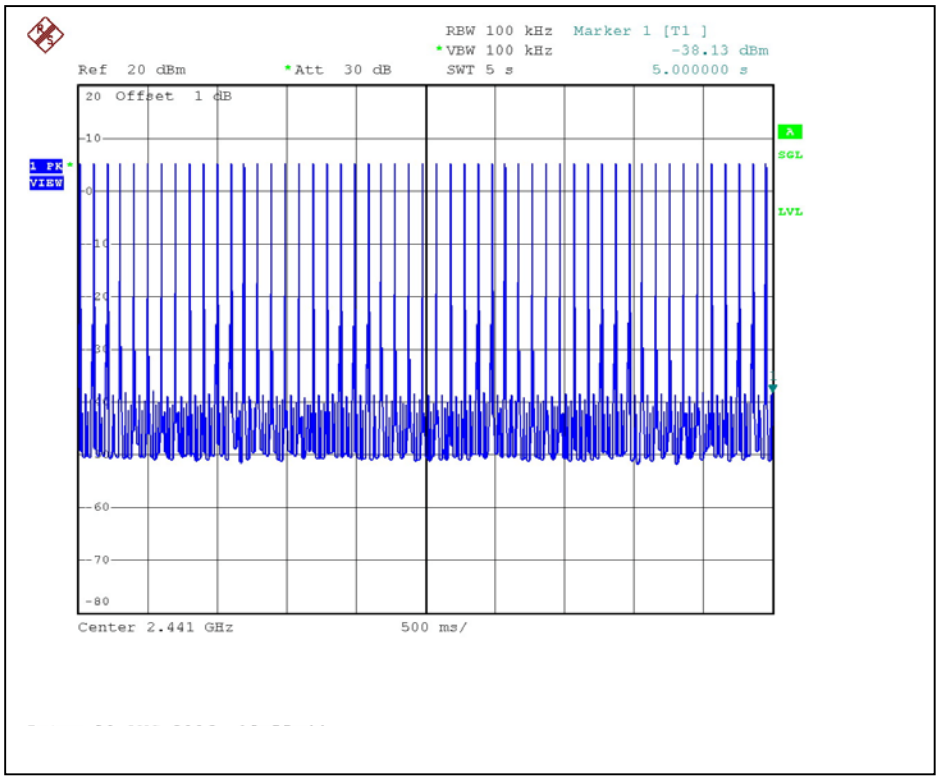
RBW 100 kHz
Marker 1 [T1]
VBW 100 kHz
-38.13 dBm
Ref 20 dBm
Att 30 dB
SWT 5 s
5.000000 s
20 Offset 1 dB
1 PK
VIEW
A
SGL
LVL
Center 2.441 GHz
500 ms/

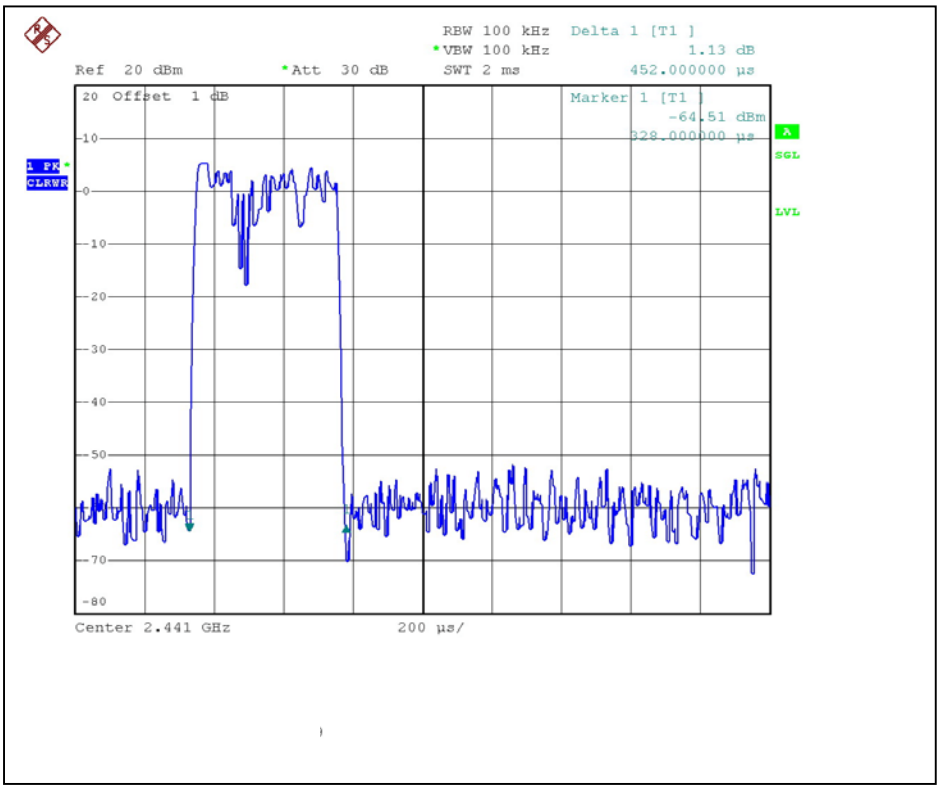
RBW 100 kHz
Delta 1 [T1]
VBW 100 kHz
1.13 dB
Ref 20 dBm
Att 30 dB
SWT 2 ms
452.000000 µs
20 Offset 1 dB
Marker 1 [T1]
-64.51 dBm
328.000000 µs
1 PK
CLRWR
A
SGL
LVL
Center 2.441 GHz
200 µs/

DH3

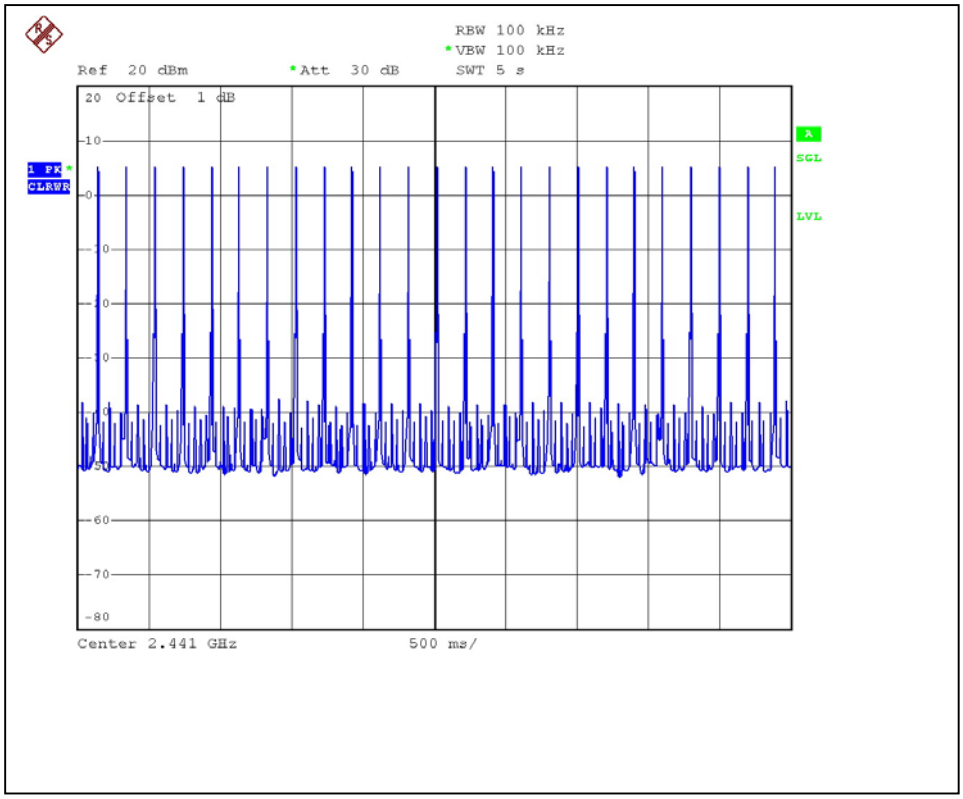
RBW 100 kHz
VBW 100 kHz
Ref 20 dBm
Att 30 dB
SWT 5 s
20 Offset 1 dB
1 PK
CLRWR
A
SGL
LVL
Center 2.441 GHz
500 ms/

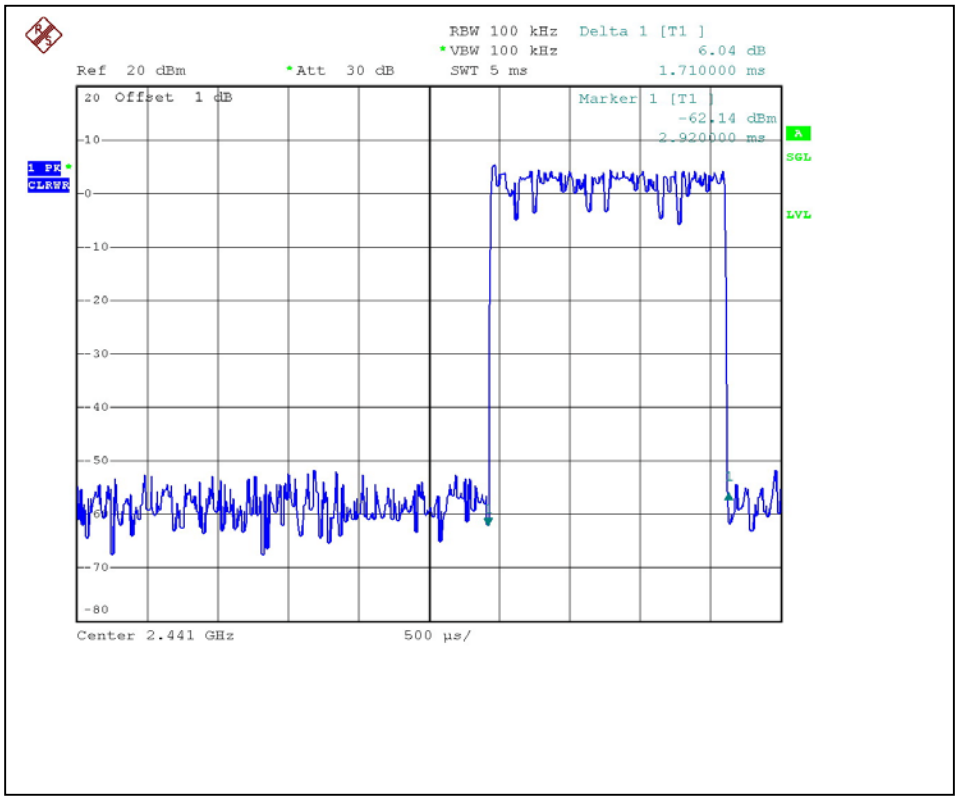
RBW 100 kHz
Delta 1 [T1]
VBW 100 kHz
6.04 dB
Ref 20 dBm
Att 30 dB
SWT 5 ms
1.710000 ms
20 Offset 1 dB
Marker 1 [T1]
-62.14 dBm
2.920000 ms
1 PK
CLRWR
A
SGL
LVL
Center 2.441 GHz
500 µs/

DH5

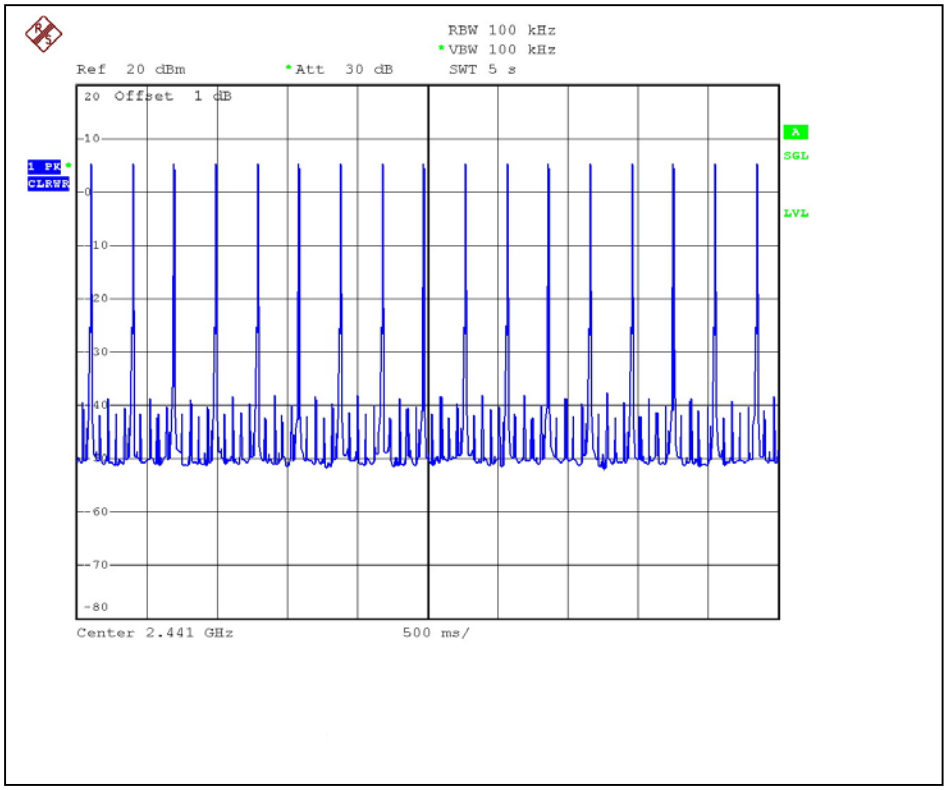
RBW 100 kHz
VBW 100 kHz
Ref 20 dBm
Att 30 dB
SWT 5 s
20 Offset 1 dB
1 PK
CLRWR
A
SGL
LVL
Center 2.441 GHz
500 ms/

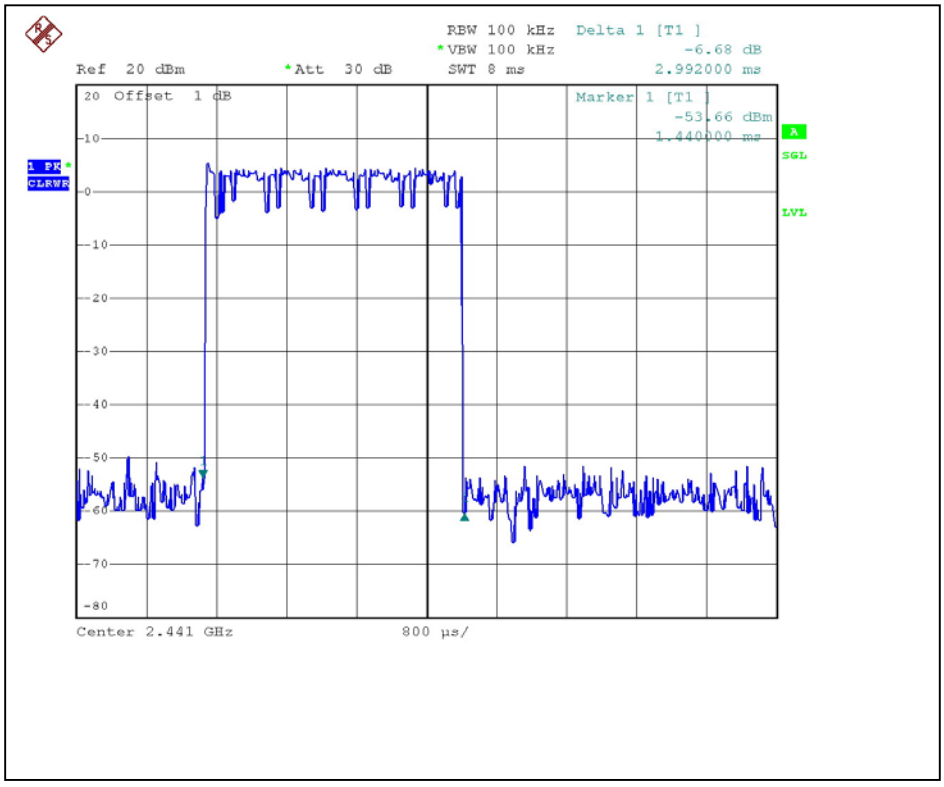
RBW 100 kHz
Delta 1 [T1]
VBW 100 kHz
-6.68 dB
Ref 20 dBm
Att 30 dB
SWT 8 ms
2.992000 ms
20 Offset 1 dB
Marker 1 [T1]
-53.66 dBm
1.440000 ms
1 PK
CLRWR
A
SGL
LVL
Center 2.441 GHz
800 µs/

4.4 CHANNEL BANDWIDTH

4.4.1 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2006

Note:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4.4 TEST SETUP

4.4.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.6 TEST RESULTS

ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 960 hPa	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)
0	2402	875
39	2441	885
78	2480	875

Channel 0

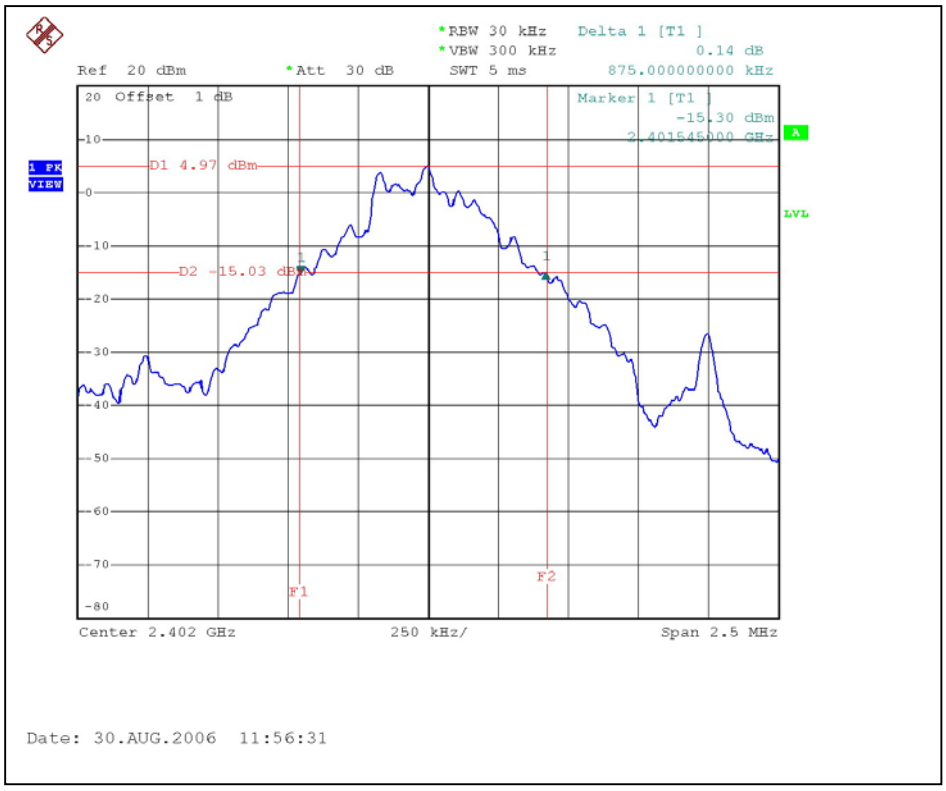

Channel 39

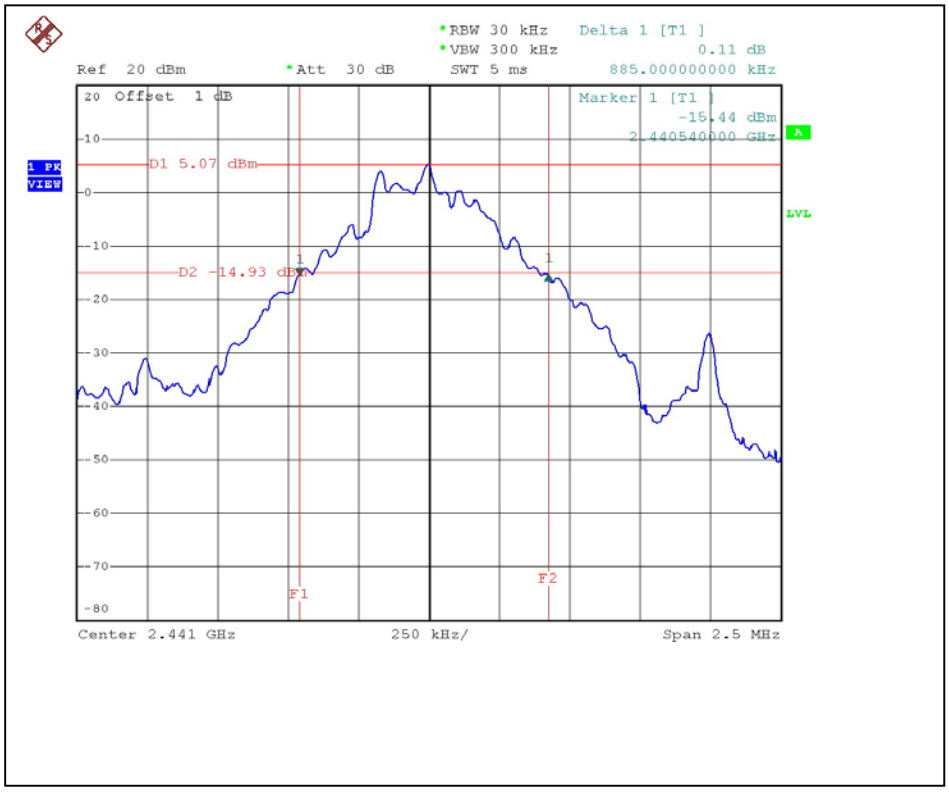

Channel 78

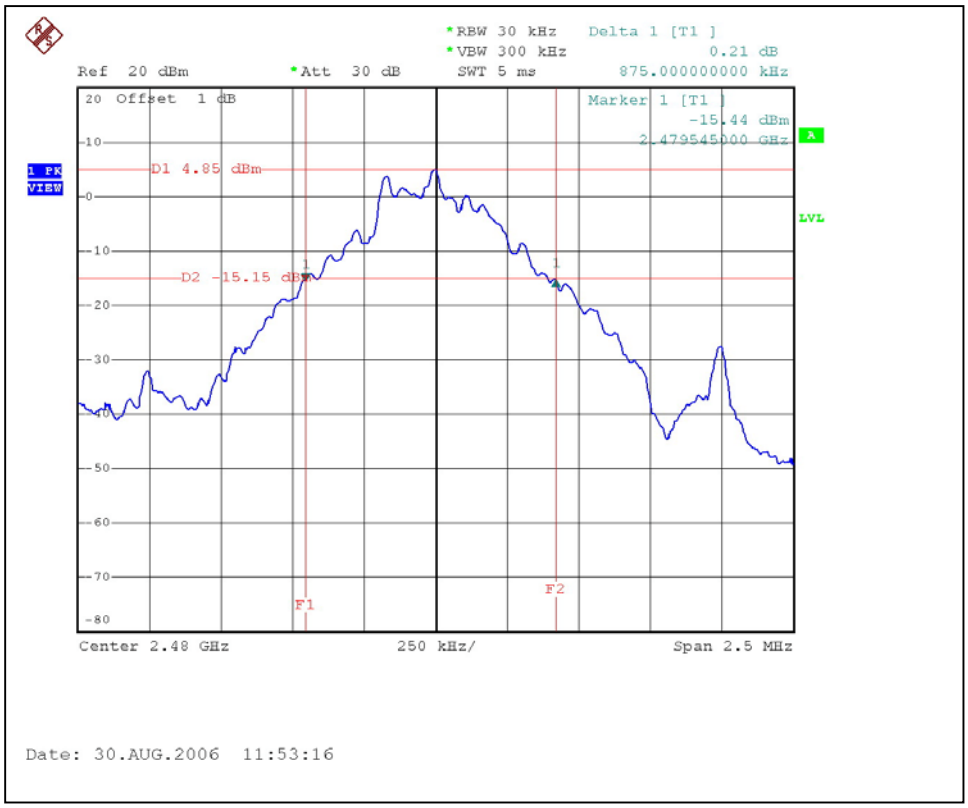
*RBW 30 kHz
*VBW 300 kHz
SWT 5 ms
Delta 1 [T1]
0.21 dB
875.000000000 kHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
Marker 1 [T1]
-15.44 dBm
2.479545000 GHz
1 PK
VIEW
A
LVL
D1 4.85 dBm
D2 -15.15 dBm
F1
F2
Center 2.48 GHz
250 kHz/
Span 2.5 MHz
Date: 30.AUG.2006 11:53:16

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2006

Note:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 TEST RESULTS

ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 960 hPa	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz
TESTED BY	Sky Liao		

Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1.000MHz	583	PASS
39	2441	1.000MHz	590	PASS
78	2480	1.000MHz	583	PASS

The minimum limit is two-thirds of 20dB bandwidth. Test results please refer to next three pages.

Channel 0

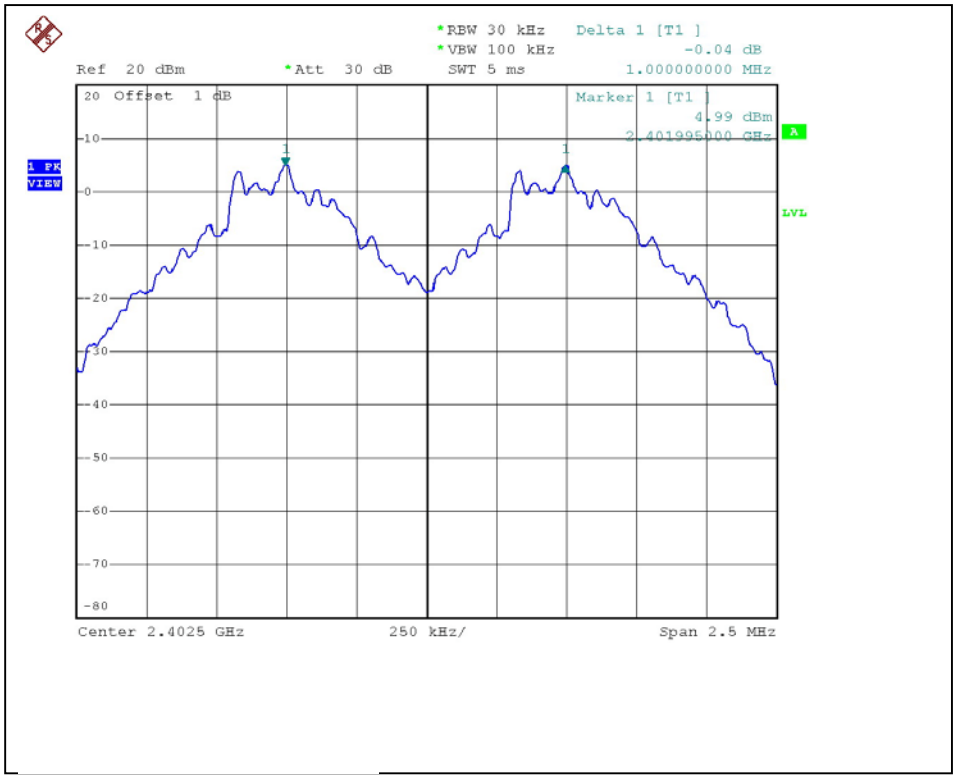

Channel 39

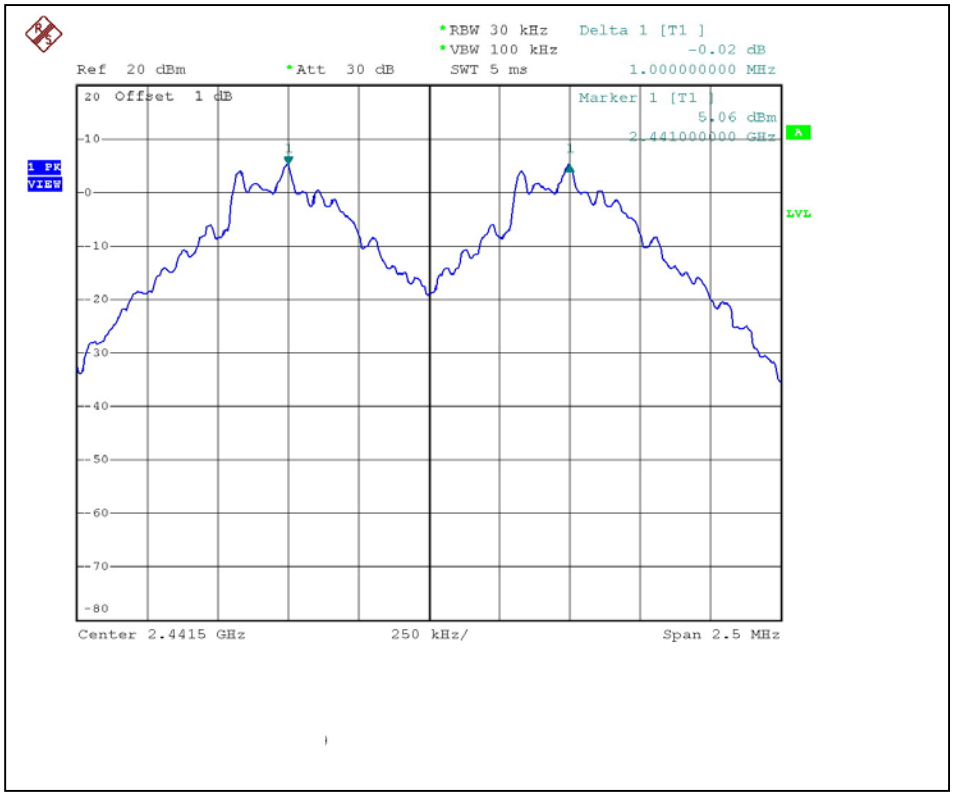

Channel 78

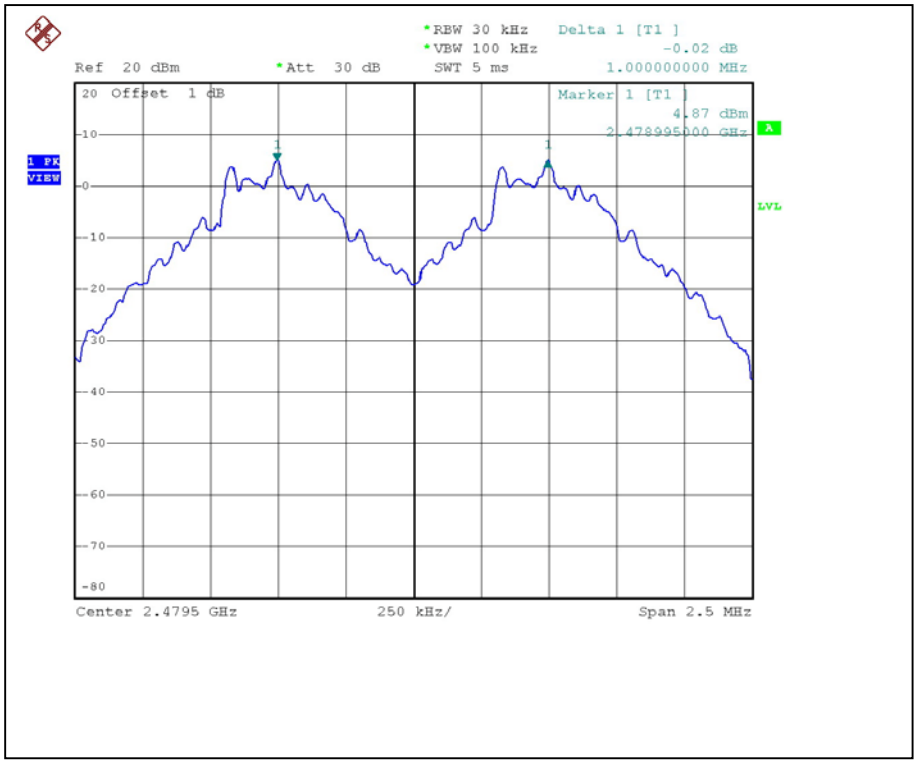
*RBW 30 kHz
*VBW 100 kHz
SWT 5 ms
Delta 1 [T1]
-0.02 dB
1.000000000 MHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
Marker 1 [T1]
4.87 dBm
2.478995000 GHz
1 PK
VIEW
A
LVL
10
0
-10
-20
-30
-40
-50
-60
-70
-80
Center 2.4795 GHz
250 kHz/
Span 2.5 MHz

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 125mW.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2006

Note:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS

ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 960 hPa	**INPUT POWER (SYSTEM)**	120Vac, 60 Hz
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	3.412	5.33	125	PASS
39	2441	3.451	5.38	125	PASS
78	2480	3.304	5.19	125	PASS

Channel 0

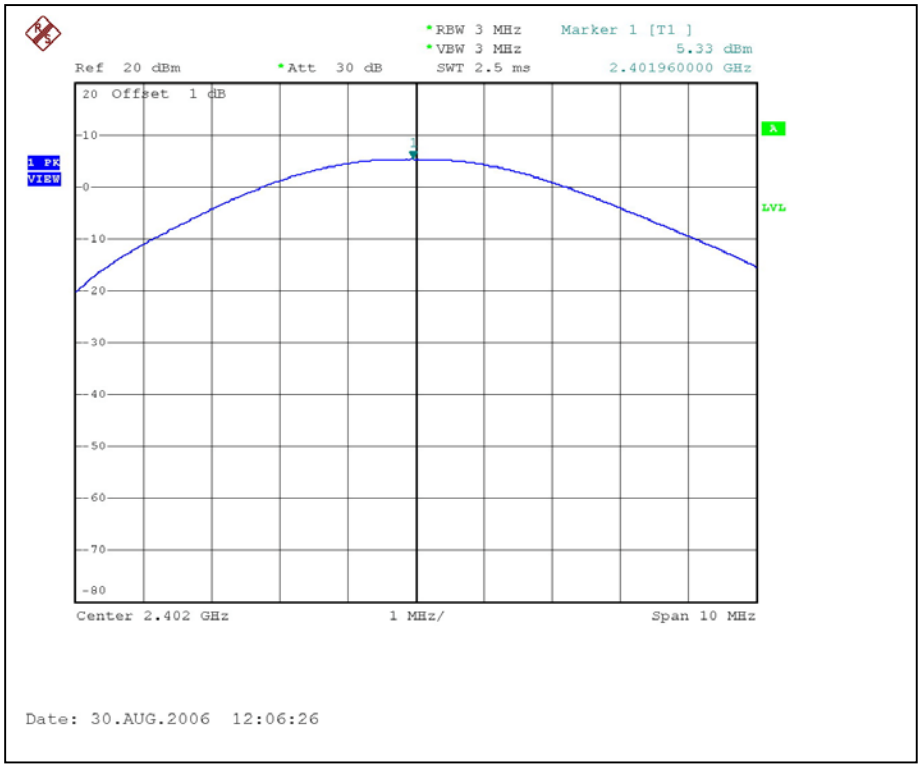

Channel 39

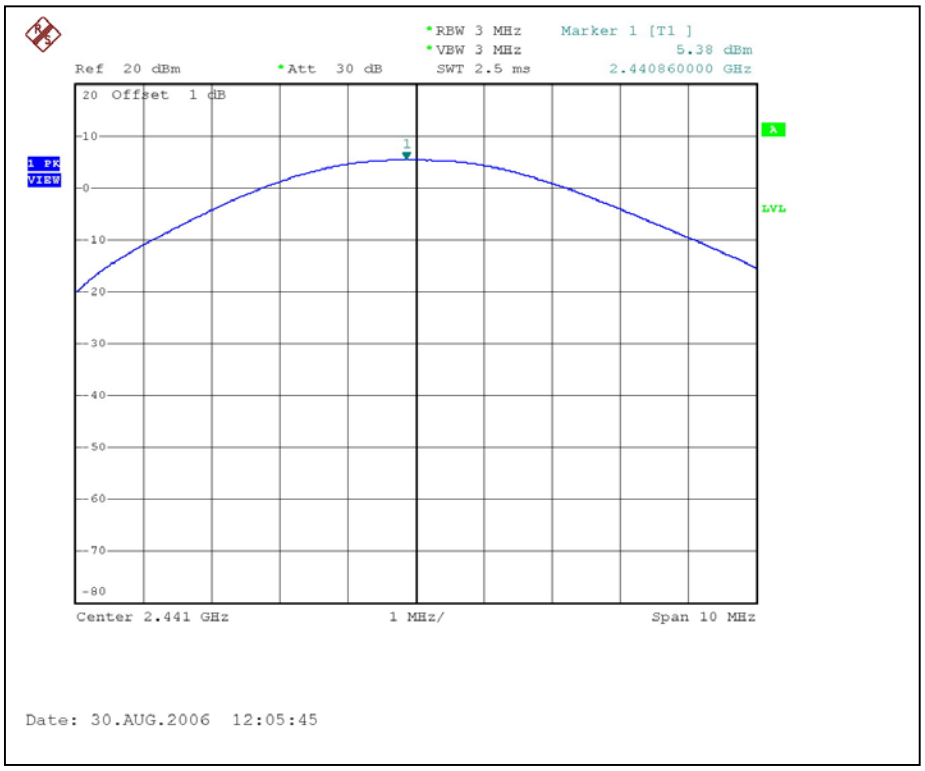

Channel 78

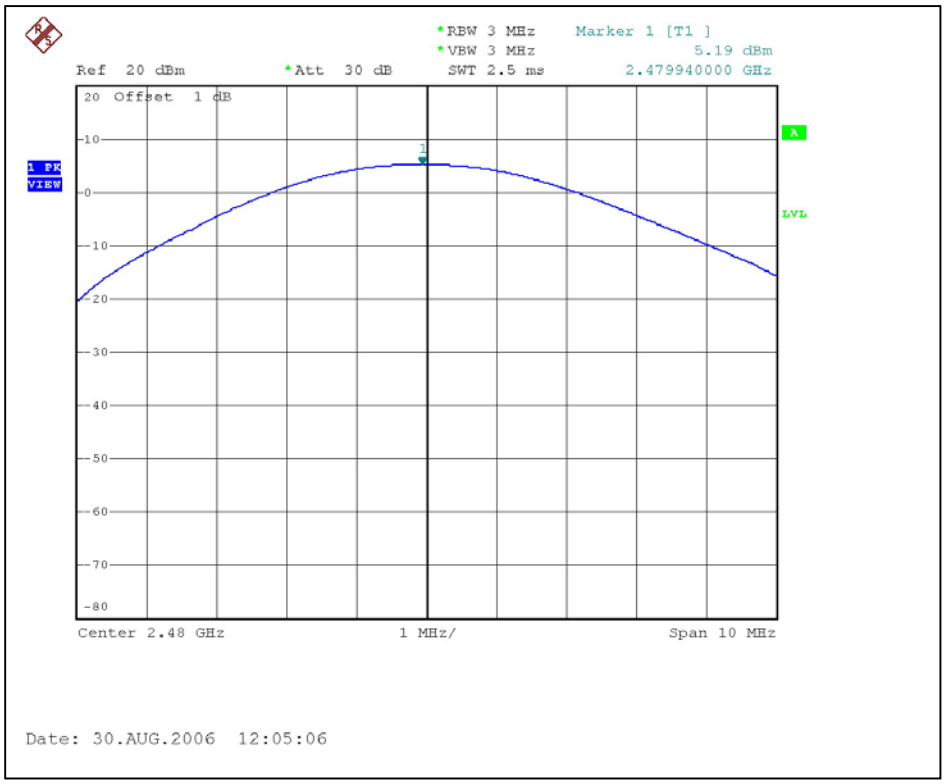
*RBW 3 MHz
*VBW 3 MHz
SWT 2.5 ms
Marker 1 [T1]
5.19 dBm
2.479940000 GHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
1 PK VIEW
A
LVL
10
0
-10
-20
-30
-40
-50
-60
-70
-80
Center 2.48 GHz
1 MHz/
Span 10 MHz
Date: 30.AUG.2006 12:05:06

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2007
HP Pre_Amplifier	8449B	3008A01922	Oct. 02, 2006
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 19, 2006
CHASE Broadband Antenna	VULB9168	138	Dec. 11, 2006
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 27, 2006
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 05, 2007
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 16. 2006
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1GHz	Jul. 15, 2007
Software	ADT_Radiated_V 5.14	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna)and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.
7. The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Radiated emissions (30MHz-1GHz)	2.98 dB
Radiated emissions (1GHz ~18GHz)	2.21 dB
Radiated emissions (18GHz ~40GHz)	1.88 dB

4.7.3 TEST PROCEDURES

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

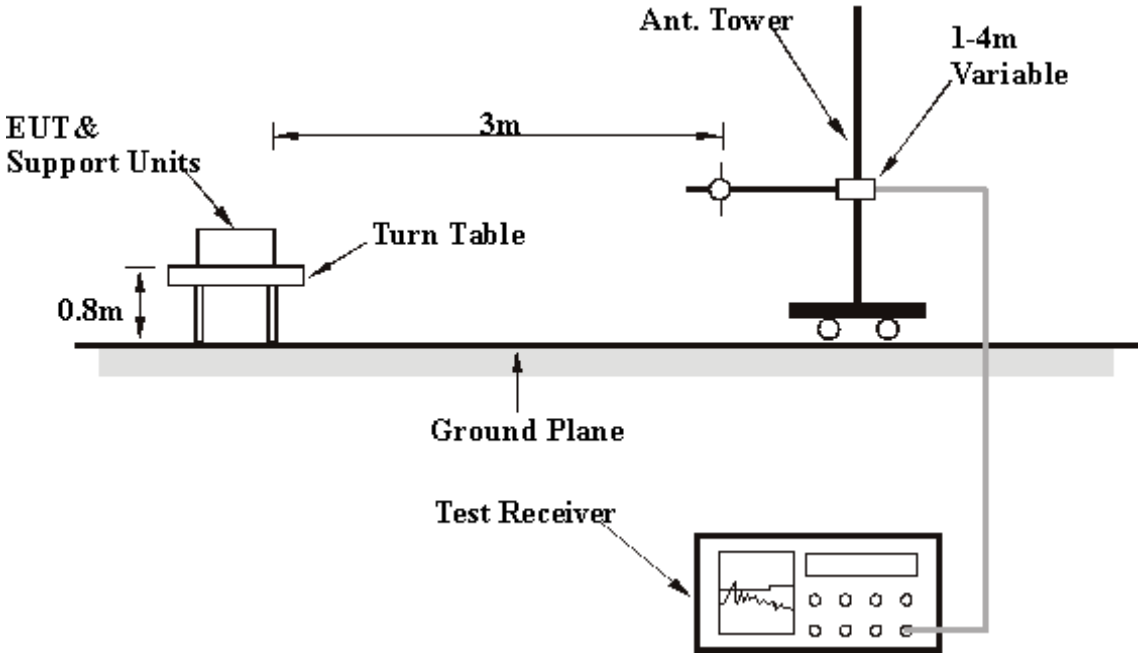

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

CHANNEL	78	**FREQUENCY RANGE**	Below 1GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 66%RH, 960 hPa	**TESTED BY**	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.02	18.30 QP	43.50	-25.20	1.20 H	170	6.50	11.80
2	240.01	22.40 QP	46.00	-23.60	1.35 H	1	9.00	13.30
3	383.99	22.30 QP	46.00	-23.70	1.25 H	186	3.80	18.50
4	479.99	20.50 QP	46.00	-25.50	1.36 H	349	-0.70	21.20
5	528.03	24.60 QP	46.00	-21.40	1.44 H	243	2.10	22.60
6	600.03	25.30 QP	46.00	-20.70	1.26 H	72	0.80	24.50
7	720.03	28.20 QP	46.00	-17.80	1.16 H	83	1.70	26.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	20.40 QP	43.50	-23.10	1.00 V	227	8.50	11.80
2	239.99	22.70 QP	46.00	-23.30	1.00 V	21	9.30	13.30
3	383.99	20.60 QP	46.00	-25.40	1.00 V	126	2.10	18.50
4	479.98	25.60 QP	46.00	-20.40	1.00 V	1	4.30	21.20
5	527.98	29.10 QP	46.00	-16.90	1.11 V	10	6.50	22.60
6	600.01	26.10 QP	46.00	-19.90	1.05 V	196	1.60	24.50
7	720.01	27.20 QP	46.00	-18.80	1.00 V	1	0.70	26.40

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

CHANNEL	Channel 0	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65%RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1062.00	54.50 PK	74.00	-19.50	1.02 H	25	25.30	29.20
1	1062.00	24.50 AV	54.00	-29.50	1.02 H	25	-4.70	29.20
2	2386.00	56.30 PK	74.00	-17.70	1.10 H	28	24.50	31.80
2	2386.00	26.30 AV	54.00	-27.70	1.10 H	28	-5.50	31.80
3	2390.00	45.10 PK	74.00	-28.90	1.23 H	32	13.20	31.90
3	2390.00	15.10 AV	54.00	-38.90	1.23 H	32	-16.80	31.90
4	*2402.00	100.10 PK			1.05 H	201	68.20	31.90
4	*2402.00	70.10 AV			1.05 H	201	38.20	31.90
5	4804.00	64.20 PK	74.00	-9.80	1.20 H	222	28.20	36.00
5	4804.00	34.20 AV	54.00	-19.80	1.20 H	222	-1.80	36.00
6	7206.00	52.20 PK	74.00	-21.80	1.65 H	258	10.60	41.50
6	7206.00	22.20 AV	54.00	-31.80	1.65 H	258	-19.40	41.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	20.90 PK	74.00	-53.10	1.20 V	25	-9.10	30.00
1	1602.00	50.90 AV	54.00	-3.10	1.20 V	25	20.90	30.00
2	2386.00	55.10 PK	74.00	-18.90	1.15 V	253	23.30	31.80
2	2386.00	25.10 AV	54.00	-28.90	1.15 V	253	-6.70	31.80
3	2390.00	45.40 PK	74.00	-28.60	1.20 V	2	13.60	31.90
3	2390.00	15.40 AV	54.00	-38.60	1.20 V	2	-16.40	31.90
4	*2402.00	99.90 PK			1.01 V	2	68.00	31.90
4	*2402.00	69.90 AV			1.01 V	2	37.00	31.90
5	4804.00	57.60 PK	74.00	-16.40	1.02 V	25	21.60	36.00
5	4804.00	27.60 AV	54.00	-26.40	1.02 V	25	-8.40	36.00
6	7206.00	52.90 PK	74.00	-21.10	1.11 V	2	11.30	41.50
6	7206.00	22.90 AV	54.00	-31.10	1.11 V	2	-18.70	41.50

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.Therefore, the duty cycle be equal to: 20log(3.125/100)= -30dB
7. Average value = peak reading –20log(duty cycle)

CHANNEL	Channel 39	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65%RH, 960 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	54.40 PK	74.00	-19.60	1.54 H	24	24.40	30.00
1	1628.00	24.40 AV	54.00	-29.60	1.54 H	24	-5.60	30.00
2	*2441.00	99.70 PK			1.20 H	21	67.70	32.00
2	*2441.00	69.70 AV			1.20 H	21	37.70	32.00
3	4882.00	67.20 PK	74.00	-6.80	1.20 H	2	30.90	36.20
3	4882.00	37.20 AV	54.00	-16.80	1.20 H	2	0.90	36.20
4	7323.00	51.80 PK	74.00	-22.20	1.25 H	25	9.90	41.80
4	7323.00	21.80 AV	54.00	-32.20	1.25 H	25	-20.10	41.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	53.30 PK	74.00	-20.70	1.47 V	54	23.30	30.00
1	1628.00	23.30 AV	54.00	-30.70	1.47 V	54	-6.70	30.00
2	*2441.00	97.30 PK			1.01 V	2	65.30	32.00
2	*2441.00	67.30 AV			1.01 V	2	35.30	32.00
3	4882.00	63.50 PK	74.00	-10.50	1.52 V	24	27.20	36.20
3	4882.00	32.50 AV	54.00	-21.50	1.52 V	24	-3.80	36.20
4	7323.00	51.20 PK	74.00	-22.80	1.20 V	3	9.30	41.80
4	7323.00	21.20 AV	54.00	-32.80	1.20 V	3	-20.70	41.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.Therefore, the duty cycle be equal to: 20log(3.125/100)= -30dB
7. Average value = peak reading –20log(duty cycle)

CHANNEL	Channel 78	**FREQUENCY RANGE**	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	**DETECTOR FUNCTION**	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65%RH, 960 hPa	**TESTED BY**	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	55.70 PK	74.00	-18.30	1.52 H	25	25.70	30.00
1	1653.00	25.70 AV	54.00	-28.30	1.52 H	25	-4.30	30.00
2	*2480.00	100.00 PK			1.11 H	2	67.80	32.20
2	*2480.00	70.00 AV			1.11 H	2	37.80	32.20
3	2483.50	51.10 PK	74.00	-22.90	1.23 H	65	18.90	32.20
3	2483.50	21.10 AV	54.00	-32.90	1.23 H	65	-11.10	32.20
4	2484.00	52.90 PK	74.00	-21.10	1.12 H	24	20.70	32.20
4	2484.00	22.90 AV	54.00	-31.10	1.12 H	24	-9.30	32.20
5	2496.00	53.90 PK	74.00	-20.10	1.32 H	65	21.70	32.20
5	**2496.00**	**53.90 AV**	**54.00**	**-0.10**	**1.32 H**	**65**	**21.70**	**32.20**
6	4960.00	69.70 PK	74.00	-4.30	1.43 H	32	33.20	36.40
6	4960.00	39.70 AV	54.00	-14.30	1.43 H	32	3.20	36.40
7	7440.00	53.40 PK	74.00	-20.60	1.00 H	21	11.20	42.20
7	7440.00	23.40 AV	54.00	-30.60	1.00 H	21	-18.80	42.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.00	52.80 PK	74.00	-21.20	1.01 V	25	22.80	30.00
1	1653.00	22.80 AV	54.00	-31.20	1.01 V	25	-7.20	30.00
2	*2480.00	100.40 PK			1.00 V	21	68.20	32.20
2	*2480.00	70.40 AV			1.00 V	21	38.20	32.20
3	2483.50	50.50 PK	74.00	-23.50	1.47 V	25	18.30	32.20
3	2483.50	20.50 AV	54.00	-33.50	1.47 V	25	-11.70	32.20
4	2484.00	53.40 PK	74.00	-20.60	1.11 V	25	21.20	32.20
4	2484.00	23.40 AV	54.00	-30.60	1.11 V	25	-8.80	32.20
5	2496.00	53.10 PK	74.00	-20.90	1.23 V	65	20.90	32.20
5	2496.00	23.10 AV	54.00	-30.90	1.23 V	65	-9.10	32.20
6	4960.00	64.10 PK	74.00	-9.90	1.50 V	2	27.60	36.40
6	4960.00	34.10 AV	54.00	-19.90	1.50 V	2	-2.40	36.40
7	7440.00	53.70 PK	74.00	-20.30	1.32 V	25	11.50	42.20
7	7440.00	23.70 AV	54.00	-30.30	1.32 V	25	-18.50	42.20

REMARKS:
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625*5 per 247 ms per channel.Therefore, the duty cycle be equal to: 20log(3.125/100)= -30dB
7. Average value = peak reading –20log(duty cycle)

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2006

Note:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):
The band edge emission plot on the following page show 54.99dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2 is 100.10dBuV/m, so the maximum field strength in restrict band is 100.10-54.99=45.11dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot on the following page shows 49.89dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.2 is 100.40dBuV/m, so the maximum field strength in restrict band is 100.40-49.89=50.51dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):
Average value = 45.11-30.00=15.11dBuV/m, which is under 54dBuV/m limit.
*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: 20log(3.125/100)= -30 dB. Average value = peak reading – 30.00.

Average value = 50.51-30.00=20.51dBuV/m, which is under 54dBuV/m limit.
*The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon Bluetooth theory the transmitter is on 0.625 * 5 per 296.25 ms per channel. Therefore, the duty cycle be equal to: 20log(3.125/100)= -30 dB. Average value = peak reading – 30.00.

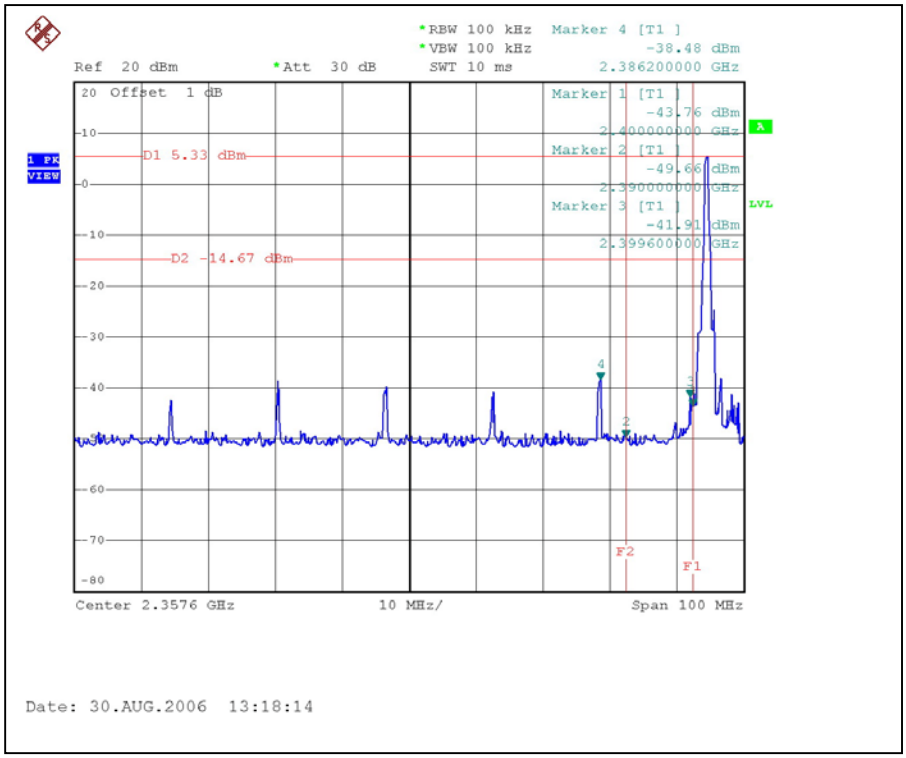
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 4 [T1]
-38.48 dBm
2.386200000 GHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
Marker 1 [T1]
-43.76 dBm
2.400000000 GHz
Marker 2 [T1]
-49.66 dBm
2.390000000 GHz
Marker 3 [T1]
-41.91 dBm
2.399600000 GHz
D1 5.33 dBm
D2 -14.67 dBm
1 PK VIEW
LVL
F2
F1
Center 2.3576 GHz
10 MHz/
Span 100 MHz
Date: 30.AUG.2006 13:18:14

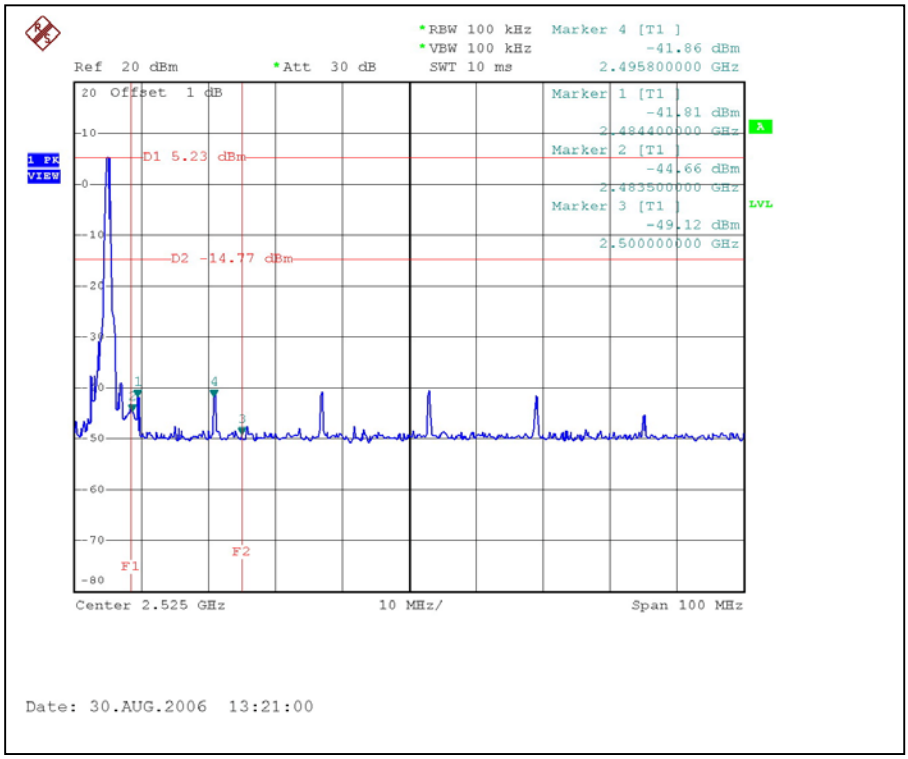
*RBW 100 kHz
*VBW 100 kHz
SWT 10 ms
Marker 4 [T1]
-41.86 dBm
2.495800000 GHz
Ref 20 dBm
*Att 30 dB
20 Offset 1 dB
Marker 1 [T1]
-41.81 dBm
2.484400000 GHz
Marker 2 [T1]
-44.66 dBm
2.483500000 GHz
Marker 3 [T1]
-49.12 dBm
2.500000000 GHz
D1 5.23 dBm
D2 -14.77 dBm
1 PK VIEW
LVL
F1
F2
Center 2.525 GHz
10 MHz/
Span 100 MHz
Date: 30.AUG.2006 13:21:00

4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is as following.

for Bluetooth
For Bluetooth: built-in ceramic antenna, Gain 2dBi (typical)

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST (Mode 1~4)

CONDUCTED EMISSION TEST (Mode 5~6)

RADIATED EMISSION TEST

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw
Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.