

Certification Exhibit

**FCC ID: UIDDG1670
IC: 6670A-DG1670**

**FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210**

ACS Project Number: 12-0356

**Manufacturer: Arris International, Inc.
Model: DG1670A, DG1660A**

Label Information



Figure 1: Label Placement

PROPRIETARY
NOTICE

THE CONTENTS OF THIS MATERIAL ARE CONFIDENTIAL AND PROPRIETARY TO ARRIS AND SHOULD NOT BE USED, REPRODUCED, PUBLISHED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS AUTHORIZATION OF ARRIS.

REVISIONS

ZONE	REV	DESCRIPTION	DATE	REVISED BY	APPROVED BY
	A	RELEASE PER EB-08122	09/21/12	SW	CR
	B	RELEASE PER EB-08515	04/05/13	JFN	CR
	C	RELEASE PER EB-08515	07/17/13	JFN	CR

NOTES:

- MATERIAL: SEE BOM FOR MATERIAL APPLICATION.
- ALL LABEL CORNERS: 0.8mm RADIUS.
- PRE-PRINTED COLORS: BACKGROUND: ARRIS CHARCOAL GRAY; TEXT AND GRAPHICS: WHITE AS NOTED WITH CROSS HATCHING
- FACTORY PRINTING: BACKGROUND: WHITE; TEXT AND BARCODE: BLACK
- TYPE: ARIAL REGULAR; TEXT HEIGHT: 6 POINT MINIMUM.
- ALL LABEL MARKINGS MUST COMPLY WITH ARDO00454 - MARKING REQUIREMENTS FOR ARRIS BROADBAND PRODUCTS.
- BARCODE SYMBOLOGY TO BE CODE 128 FORMAT AND SHOULD BE A MINIMUM HEIGHT OF 3.7MMM.


ARRIS LOGO TYPE SHOWN IS FOR POSITION ONLY
USE ARRIS APPROVED CAMERA
READY ART PER QMS0075/7.1

BACKGROUND COLOR: ARRIS
CHARCOAL GRAY
TEXT AND GRAPHICS: WHITE

REGULATORY MARKS ARE
FOR REFERENCE ONLY
USE AGENCY APPROVED CAMERA
READY ART

BACKGROUND COLOR:
WHITE

PRE-PRINTED LABEL

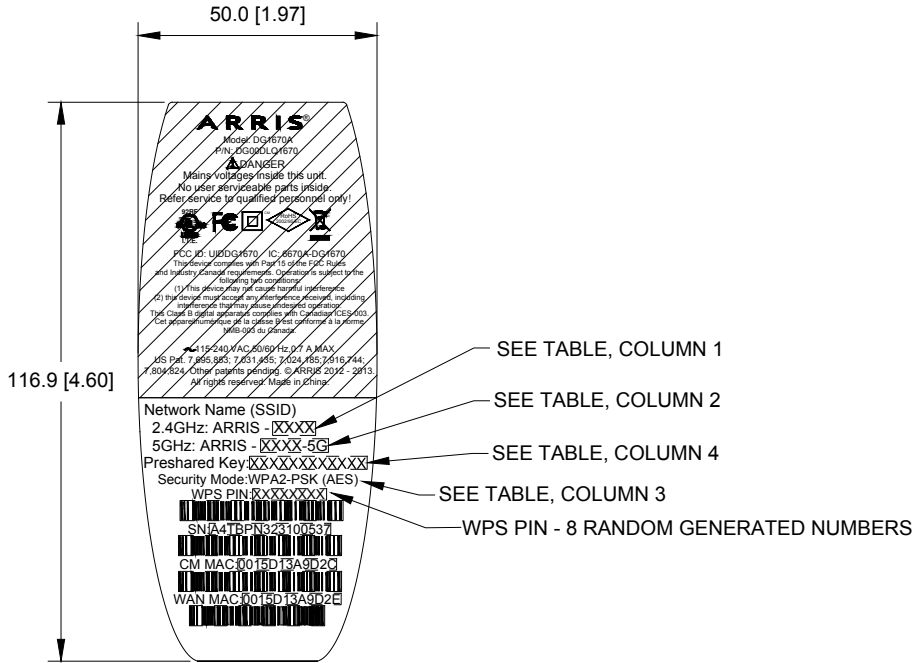

FACTORY PRINTED LABEL

LABEL INFORMATION					
Model	2.4G Field	5G Field	2.4/5G WiFi Radio Decoder	Security Mode Field	Network or Pre-Shared Key Fields
	1	2		3	4
Time Warner	"DG1670AXX"	"DG1670AXX-5G"	"XX" ("XX" = LAST 2 CHARACTERS OF CMAC ADDRESS). Use for 2.4G and 5G field descriptions	"WPA2-PSK (AES)"	"DG1670AXXXXXX" ("XXXXXX")= last six digits of CMAC address). Use field description "Pre-Shared Key"
ARRIS	"ARRIS-XXXX"	"ARRIS-XXXX-5G"	"XXXX" ("XXXX" = LAST 4 CHARACTERS OF CMAC ADDRESS). Use for 2.4G and 5G field descriptions	"WPA2-PSK (AES)"	"XXXXXXXXXXXXX" ("XXXXXXXXXXXXX")= last 12 digits of S/N). Use field description "Pre-Shared Key"

METRIC

• UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETERS TOLERANCES ARE:
• DECIMALS ANGLES
X ± I X ± I°
.X ± .I
• INTERPRET DRAWINGS PER ANSI Y14.5M - 1994 AND ARRIS QMS0019

DO NOT SCALE DRAWING

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE. ANY HARDCOPY OF THIS DOCUMENT IS AN UNCONTROLLED COPY.

APPROVALS

DRAWN SW

CHECKED

APPROVED CR

THIRD ANGLE PROJECTION

ARRIS

3871 LAKEFIELD DR, SUITE 30
SUWANEE, GA 30024-1242

TITLE
LABEL, REGULATORY,
DG1670A

SIZE B DWG NO. ARMP08520DWG

SCALE 1:1

REV. C

SHEET 1 OF 1

4

3

2

1

PROPRIETARY
NOTICE


THE CONTENTS OF THIS MATERIAL ARE CONFIDENTIAL AND PROPRIETARY TO ARRIS AND SHOULD NOT BE USED, REPRODUCED, PUBLISHED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS AUTHORIZATION OF ARRIS.

REVISIONS					
ZONE	REV	DESCRIPTION	DATE	REVISED BY	APPROVED BY
	A	RELEASE PER EB-08494	03/27/13	-	CR
	B	RELEASE PER EB-08515	04/05/13	JFN	CR
	C	RELEASE PER EB-08776	07/17/13	JFN	CR

- NOTES:
1. MATERIAL: SEE BOM FOR MATERIAL APPLICATION.
 2. ALL LABEL CORNERS: 0.8mm RADIUS.
 3. PRE-PRINTED COLORS: BACKGROUND: ARRIS CHARCOAL GRAY; TEXT AND GRAPHICS: WHITE AS NOTED WITH CROSS HATCHING
 4. FACTORY PRINTING: BACKGROUND: WHITE; TEXT AND BARCODE: BLACK
 5. TYPE: ARIAL REGULAR; TEXT HEIGHT: 6 POINT MINIMUM.
 6. ALL LABEL MARKINGS MUST COMPLY WITH ARDO00454 - MARKING REQUIREMENTS FOR ARRIS BROADBAND PRODUC
 7. BARCODE SYMBOLOGY TO BE CODE 128 FORMAT AND SHOULD BE A MINIMUM HEIGHT OF 3.7MMM.

ARRIS LOGO TYPE
SHOWN IS FOR POSITION ONLY
USE ARRIS APPROVED CAMERA
READY ART PER QMS0075/7.1


BACKGROUND COLOR: ARRIS
CHARCOAL GRAY
TEXT AND GRAPHICS: WHITE

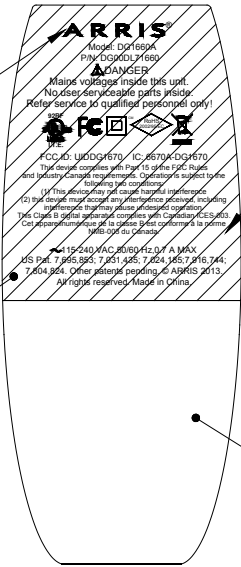

REGULATORY MARKS ARE
FOR REFERENCE ONLY
USE AGENCY APPROVED CAMERA
READY ART

BACKGROUND COLOR:
WHITE

PRE-PRINTED LABEL

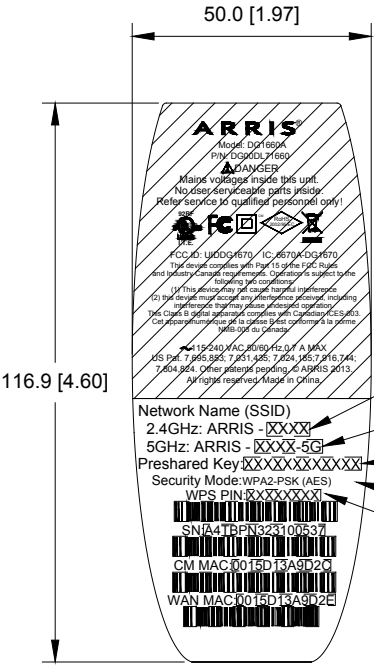

SEE TABLE, COLUMN 1

SEE TABLE, COLUMN 2

SEE TABLE, COLUMN 4

SEE TABLE, COLUMN 3

WPS PIN - 8 RANDOM GENERATED NUMBERS

LABEL INFORMATION					
Model	2.4G Field	5G Field	2.4/5G WiFi Radio Decoder	Security Mode Field	Network or Pre-Shared Key Fields
	1	2		3	4
ARRIS	"ARRIS-XXXX"	"ARRIS-XXXX-5G"	"XXXX" ("XXXX" = LAST 4 CHARACTERS OF CMAC ADDRESS). Use for 2.4G and 5G field descriptions	"WPA2-PSK (AES)"	"XXXXXXXXXXXXX"("XXXXXXXXXXXXX")= last 12 digits of S/N). Use field description "Pre-Shared Key"

METRIC

• UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE MILLIMETERS TOLERANCES ARE:
• DECIMALS ANGLES
X ±.1 X ±.1°
• INTERPRET DRAWINGS PER ANSI Y14.5M - 1994 AND ARRIS QMS0019

DO NOT SCALE DRAWING

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE. ANY HARDCOPY OF THIS DOCUMENT IS AN UNCONTROLLED COPY.

APPROVALS
DRAWN JFN
CHECKED
APPROVED CR
THIRD ANGLE PROJECTION

ARRIS

3871 LAKEFIELD DR, SUITE 300
SUWANEE, GA 30024-1242

TITLE
LABEL, REGULATORY,
DG1660A

SIZE B
DWG NO. ARMP08721DWG
SCALE 1:1

REV C
SHEET 1 OF 1