



Sercomm Internal Antenna

Preliminary Data Sheet

P/N: 617210DX

SerComm Confidential

(c) COPYRIGHT SerComm Corporation
All Rights Reserved, 2009.

This document contains information of a proprietary nature. **ALL INFORMATION CONTAINED HEREIN SHALL BE KEPT IN STRICT CONFIDENTIAL.** None of this information shall be divulged to persons other than SerComm employees authorized by the nature of their duties to receive information, or individuals and organizations authorized by SerComm in accordance with existing policy regarding release of company information.

SerComm Corporation

8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C
Tel: 886-2-26553988
Fax: 886-2-26553966
[http: //www.sercomm.com.tw](http://www.sercomm.com.tw)

SerComm (Suzhou) R&D Center

NO. 26, Xinghai Street, Suzhou Industrial Park, Jiangsu, China
Tel: 86-512-67612332
Fax: 86-512-67612331

Revision History

REV.	Date	Author	Description
REV 0	2014/02/24	Miles	Approval

Sercomm Corporation			
Antenna Engineer Checked	Mechanical Engineer Checked	R&D Manager Checked	R&D Director Checked
<i>Miles Chu</i>	<i>Bruce Lee</i>	<i>Jerry Liu</i>	<i>Kevin_cw Tseng</i>

1. Antenna Specifications.....	0
1.1 Electrical Properties	2
1.2 Physical Properties	2
2. Product Drawing	3
3. Performance Test Report	4
3.1 Test Facility.....	4
3.2 Return Loss.....	5
3.3 Radiation Pattern	6
3.4 Gain & Efficiency.....	8
4.Layout Guide & Footprint.....	9

1. Antenna Specifications


1.1 Electrical Properties

Application	(1) WiFi 802.11n/a
Antenna Type	PIFA
Frequency Range (MHz)	5150MHz ~ 5850MHz
Return Loss (dB)	Used for device > 10dB Free space > 10dB
Peak Gain (dBi)	>4.72dBi
Efficiency (%)	> 60%
Polarization	Linear polarization
Feed Impedance (ohm)	50Ω
Cable Type	Φ1.13mm
Cable Loss	0.3dB
Connector	I-pex

1.2 Physical Properties

Antenna Dimensions	13.3(L) x 11.8(W) x 10.8(H) (mm ³)
Antenna Weight	1g
Operating Temperature	- 40°C ~ + 75°C
Storage Temperature	- 40°C ~ + 75°C
Humidity Range	0% to 95% non-condensing


2. Product Drawing

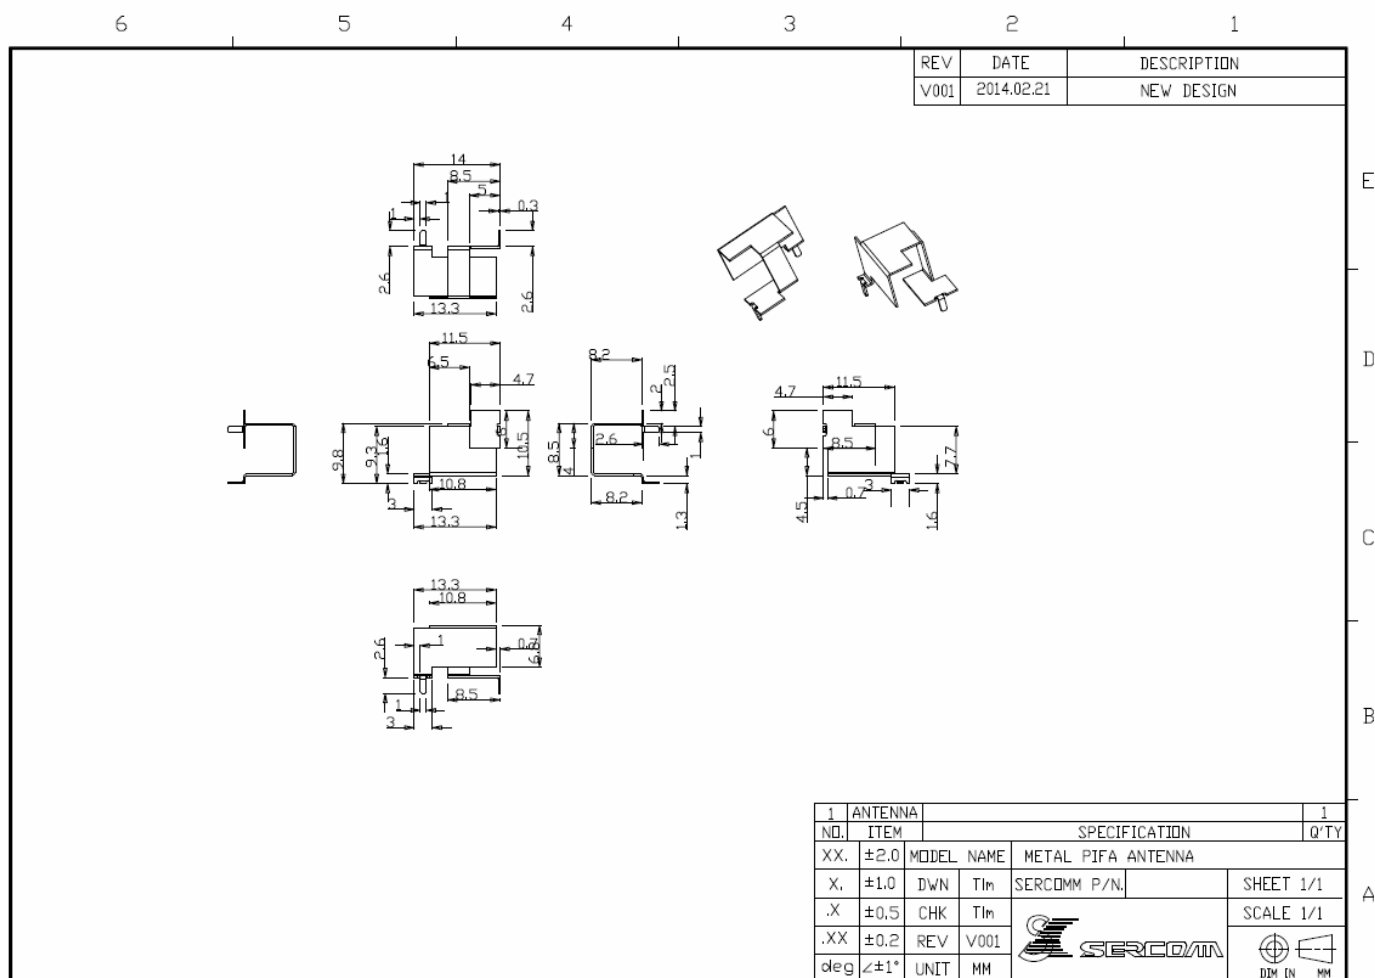


3. Performance Test Report

3.1 Test Facility


Network analyzer and standard 3D anechoic chamber are used for antenna performance test.

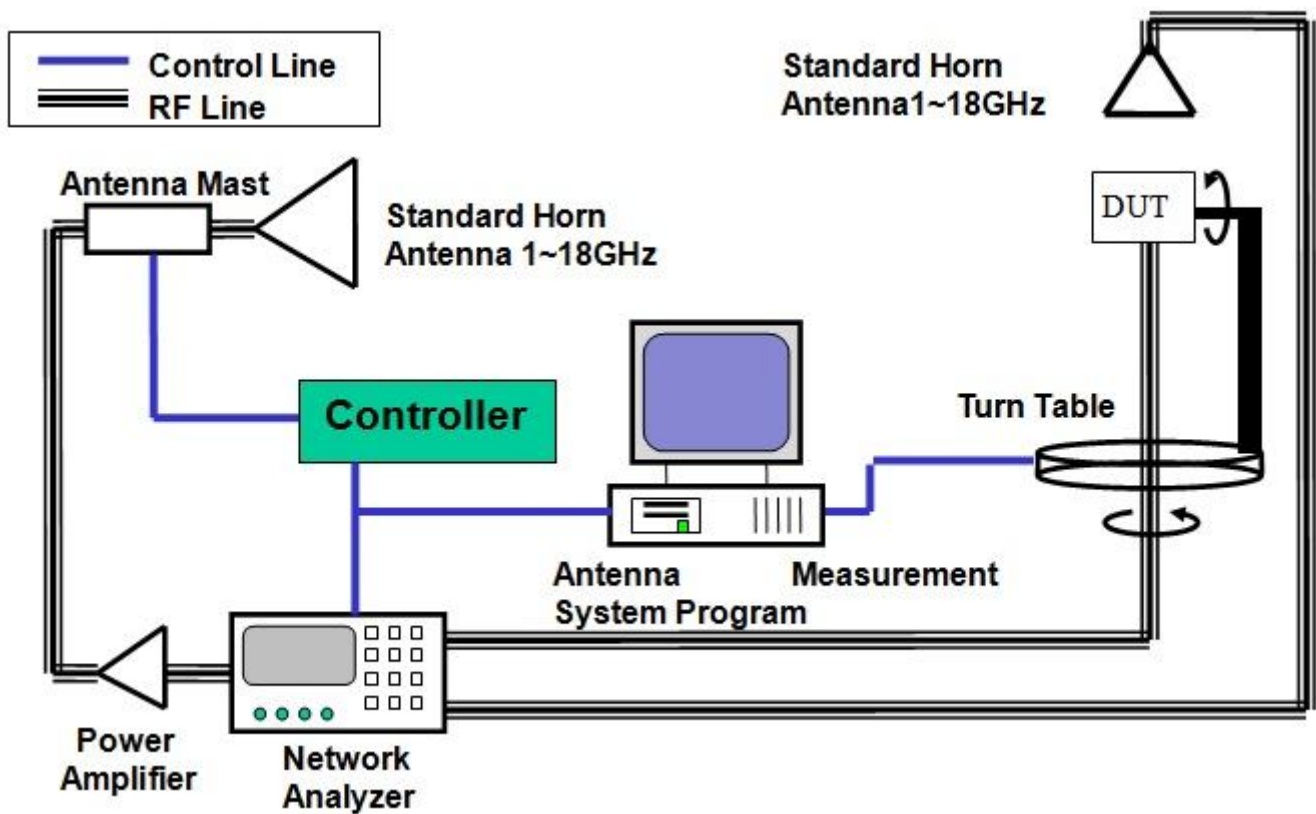


The measurement plane of the antenna is defined as below.

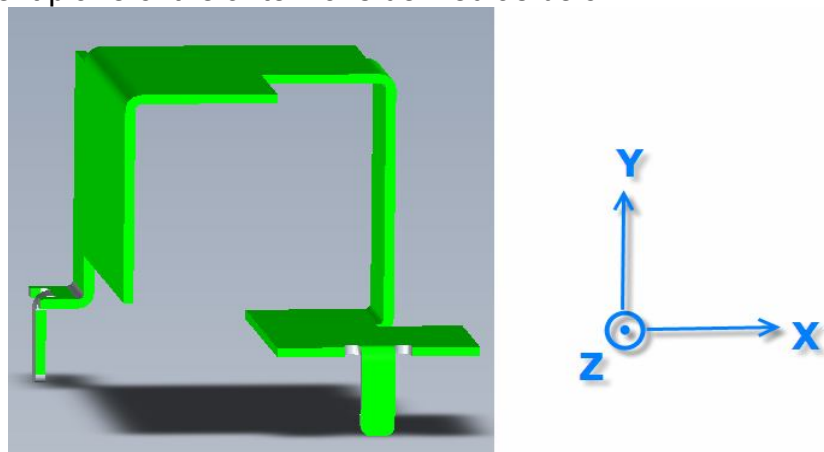


3.2 Return Loss

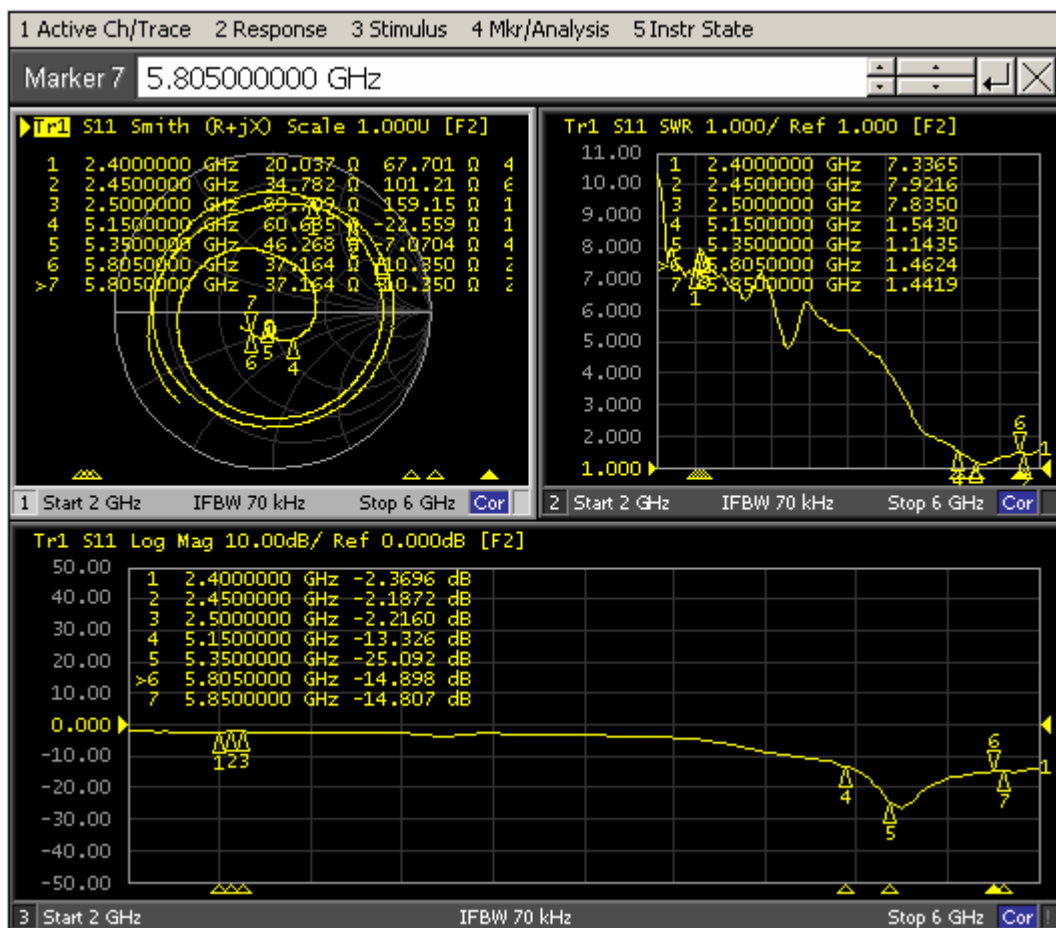


3.3 Radiation Pattern

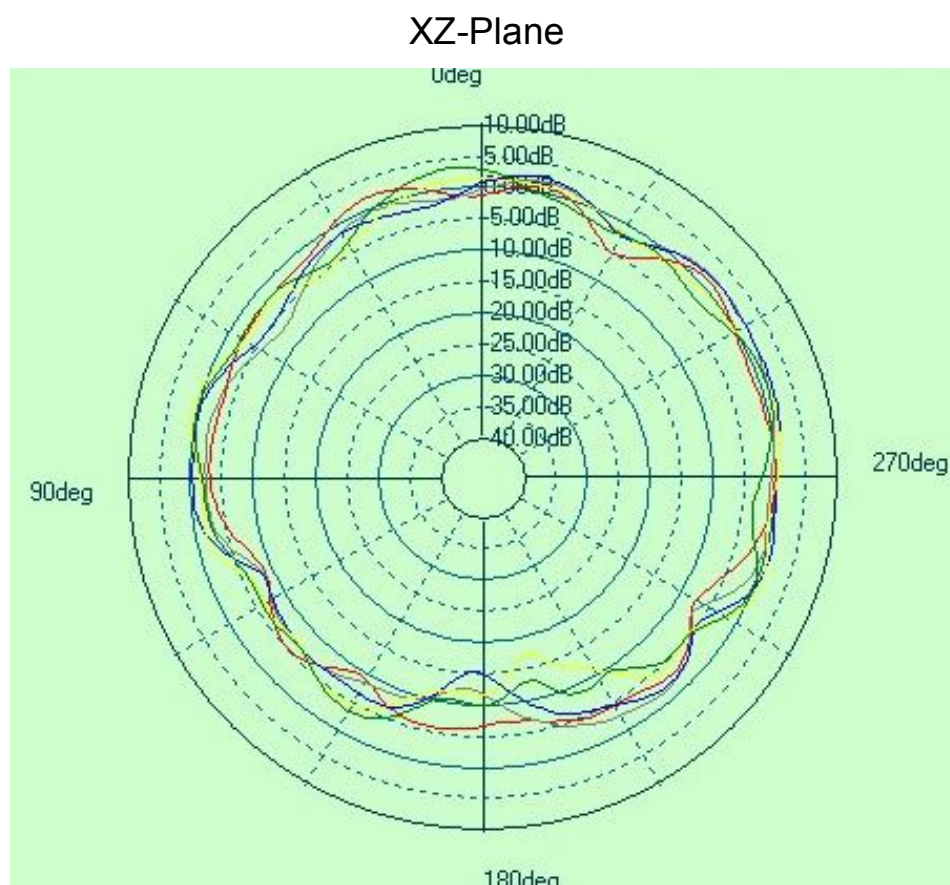

YZ-Plane

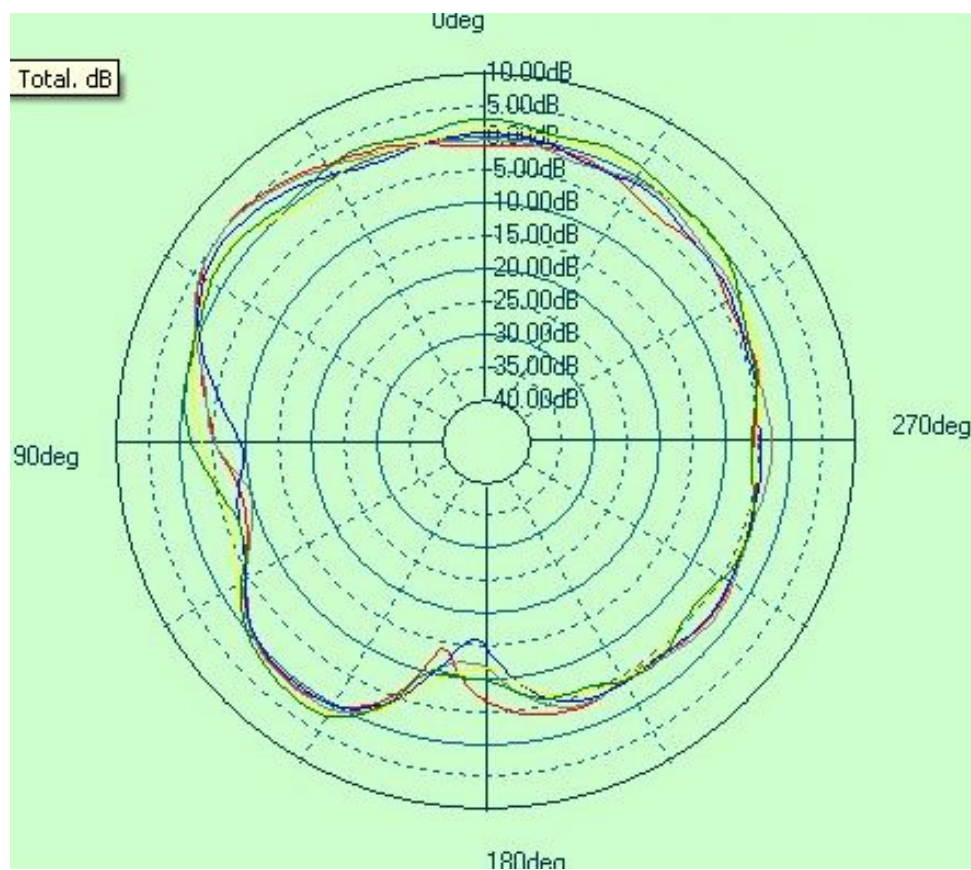

XY-Plane

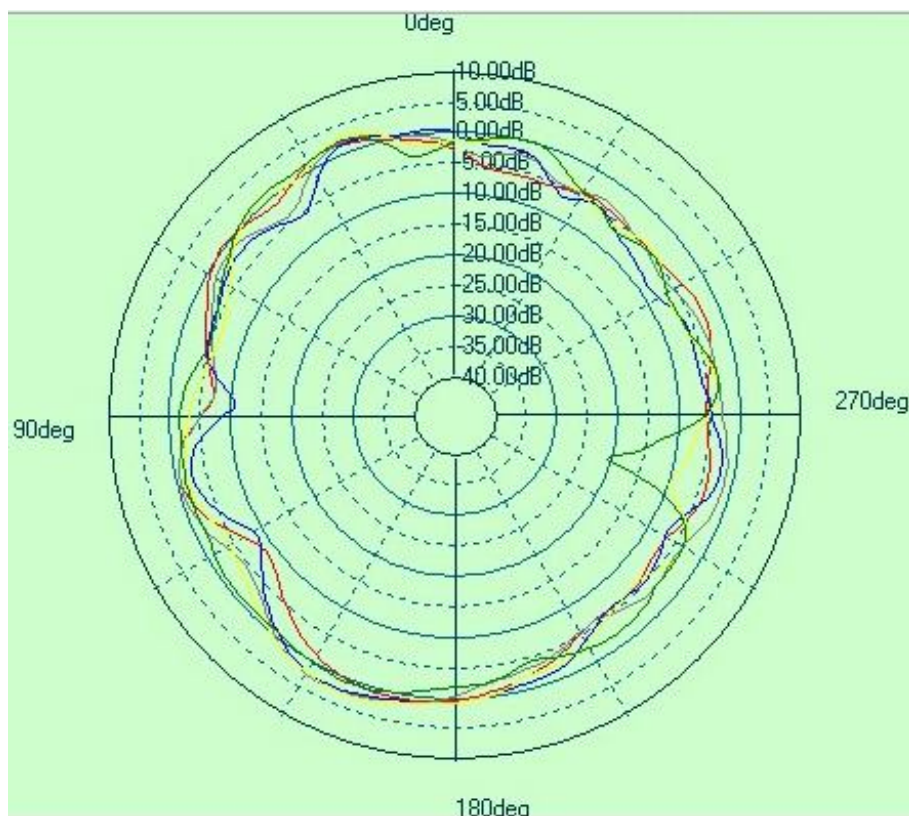




2D Average Gain

XZ-plane 2D Avg. Gain (dBi)	YZ-plane 2D Avg. Gain (dBi)	XY-plane 2D Avg. Gain (dBi)
-2.87	-2.46	-3.07


3.4 Gain & Efficiency

Frequency (MHz)	Gain (dBi)	Efficiency (%)	3D Avg. Gain (dB)
5150 MHz	5.13	63.5	-1.97
5350 MHz	5.06	63.7	-1.96
5725 MHz	5.10	65.3	-1.85
5850 MHz	5.01	63.6	-1.97

4. Layout Guide & Footprint

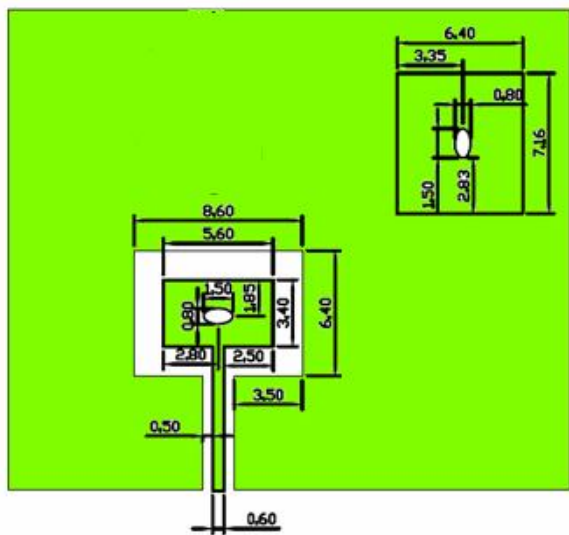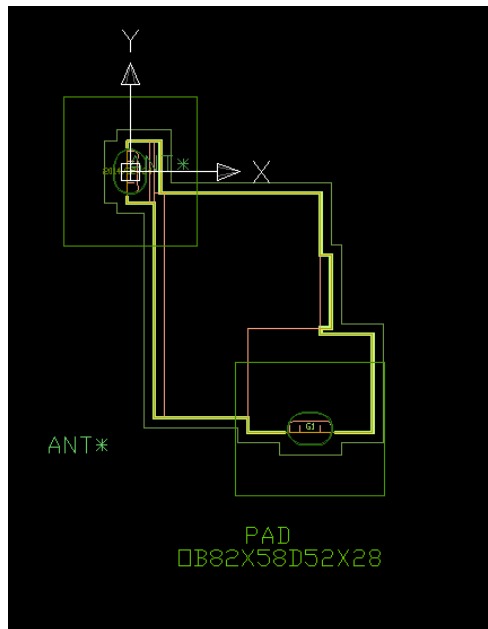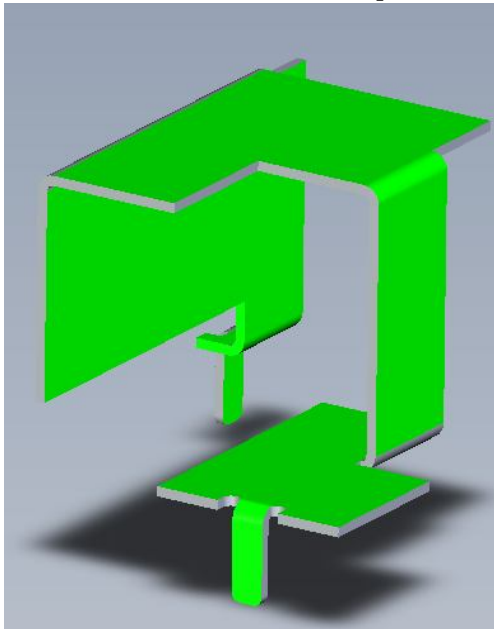

(TOP)

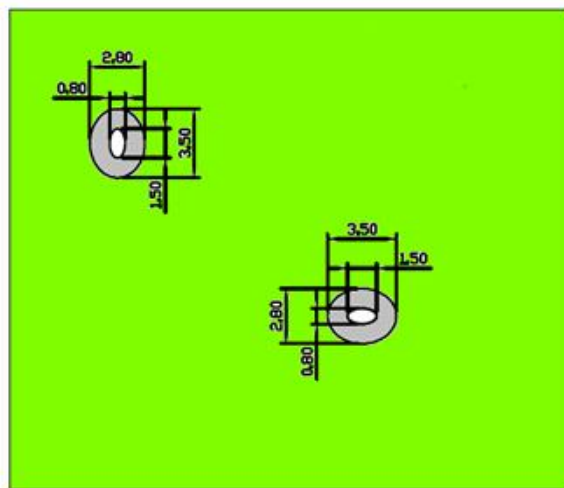

(BOTTOM)