

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                                                                       |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |   |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                                                                       |

## DECLARATION OF COMPLIANCE

### SAR RF EXPOSURE EVALUATION - FCC / IC C1PC

|                        |                          |                                                        |               |                                       |     |                             |
|------------------------|--------------------------|--------------------------------------------------------|---------------|---------------------------------------|-----|-----------------------------|
| TEST LAB INFORMATION   | Name                     | CELLTECH LABS INC.                                     |               |                                       |     |                             |
|                        | Address                  | 21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada     |               |                                       |     |                             |
| TEST LAB ACCREDITATION | Type                     | ISO / IEC 17025                                        | Accreditation | A2LA Test Lab Certificate No. 2470.01 |     |                             |
| APPLICANT INFORMATION  | Name                     | NAUTIC DEVICES INC.                                    |               |                                       |     |                             |
|                        | Address                  | 12 Bram Ct., Unit 10, Brampton, Ontario L6W 3V1 Canada |               |                                       |     |                             |
| STANDARDS APPLIED      | FCC                      | 47 CFR §2.1093                                         |               |                                       | IC  | Health Canada Safety Code 6 |
| PROCEDURES APPLIED     | FCC                      | KDB 447498 D01v05r01, KDB 865664 D01v01r02             |               |                                       | IC  | RSS102 Issue 4              |
|                        | FCC                      | KDB 865664 D02v01r01, KDB 643646 D01v01r01             |               |                                       | IEC | 62209-1:2005                |
|                        | IEEE                     | IEEE 1528-2013                                         |               |                                       | IEC | 62209-2:2010                |
| DEVICE CLASSIFICATION  | FCC                      | Licensed Non-Broadcast Transmitter Body                |               |                                       |     |                             |
| DEVICE DESCRIPTION     | Wireless Portable Phone  |                                                        |               |                                       |     |                             |
| APPLICATION TYPE       | New Certification        |                                                        |               |                                       |     |                             |
| DATE(S) OF EVALUATION  | January 19, 21, 23, 2014 |                                                        |               | SAMPLES RECEIVED                      |     |                             |

#### Devices Tested

| FCC ID   | IC Certification | Model        | Duty Cycle | Modes of Operation | Frequency Range | Manufacturer's Rated Output Power |
|----------|------------------|--------------|------------|--------------------|-----------------|-----------------------------------|
| UJW-4000 | 6695A-4000       | Yapalong4000 | 8.3 %      | FSK and GFSK       | 902 – 928 MHz   | 25.79 dBm                         |

#### Antennas Tested

| Description        | Frequency Range (MHz) | Model  | Gain | Part Number     | Output Voltage | Capacity (mAh) |
|--------------------|-----------------------|--------|------|-----------------|----------------|----------------|
| ¼ wave dipole whip | 902-928 MHz           | JCG110 | 2dbi | Lithium Polymer | 3.7V           |                |

#### Batteries Tested

#### Body-Worn Accessories Tested

| Part Number | Description | Part Number | Description |
|-------------|-------------|-------------|-------------|
| -           | Belt-Clip   | -           | none        |

#### Audio Accessories Tested

#### EVALUATION RESULTS


|                                 |      |       |      |    |                  |                                           |
|---------------------------------|------|-------|------|----|------------------|-------------------------------------------|
| Maximum SAR Level Evaluated FCC | Body | 0.093 | W/kg | 1g | 8.3% Duty Factor | General Population/ UnControlled Exposure |
| Maximum SAR Level Evaluated IC  | Body | 0.116 |      |    |                  |                                           |
| FCC / IC Spatial Peak SAR Limit | Body | 1.6   | W/kg | 1g | 8.3% Duty Factor | General Population/ UnControlled Exposure |

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada Safety Code 6 for the General Population / Uncontrolled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 4, IEEE Standard 1528-2003 and International Standard IEC 62209-2:2010. All measurements were performed in accordance with the SAR system manufacturer recommendations.

\*\*\*\*\* This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. \*\*\*\*\*

The results and statements contained in this report pertain only to the device(s) evaluated

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

|                         |                                                                                     |                  |                 |                    |
|-------------------------|-------------------------------------------------------------------------------------|------------------|-----------------|--------------------|
| Test Report Approved By |  | Art Voss, P.Eng. | Senior Engineer | Celltech Labs Inc. |
|-------------------------|-------------------------------------------------------------------------------------|------------------|-----------------|--------------------|

|                         |                         |                                                                                                                      |              |               |            |              |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|--------------|---------------|------------|--------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000     | IC ID:        | 6695A-4000 |              |
| DUT Type:               | Wireless Portable Phone | Models:                                                                                                              | Yapalong4000 | 902 – 928 MHz |            |              |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |              |               |            | Page 1 of 39 |

| TABLE OF CONTENTS                                 |    |
|---------------------------------------------------|----|
| 1.0 INTRODUCTION                                  | 4  |
| 2.0 SAR MEASUREMENT SYSTEM                        | 4  |
| 3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS        | 5  |
| 4.0 FLUID DIELECTRIC PARAMETERS                   | 7  |
| 5.0 SAR MEASUREMENT SUMMARY                       | 8  |
| 6.0 SAR SCALING                                   | 9  |
| 7.0 DETAILS OF SAR EVALUATION                     | 10 |
| 8.0 SAR EVALUATION PROCEDURES                     | 10 |
| 9.0 SYSTEM VERIFICATION                           | 11 |
| 10.0 SIMULATED EQUIVALENT TISSUES                 | 12 |
| 11.0 SAR LIMITS                                   | 12 |
| 12.0 ROBOT SYSTEM SPECIFICATIONS                  | 13 |
| 13.0 PROBE SPECIFICATION (ET3DV6)                 | 14 |
| 14.0 PHANTOM                                      | 14 |
| 15.0 DEVICE HOLDER                                | 14 |
| 16.0 TEST EQUIPMENT LIST                          | 15 |
| 17.0 MEASUREMENT UNCERTAINTIES (IC)               | 16 |
| 18.0 REFERENCES                                   | 17 |
| APPENDIX A - SAR MEASUREMENT PLOTS                | 18 |
| APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS       | 27 |
| APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS | 30 |
| APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS     | 32 |
| APPENDIX E - DIPOLE CALIBRATION                   | 37 |
| APPENDIX F - PROBE CALIBRATION                    | 38 |
| APPENDIX G - PHANTOM CERTIFICATE OF CONFORMITY    | 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |   |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                                                                        |

Test Lab Certificate No. 2470.01

| REVISION HISTORY |                 |                |              |
|------------------|-----------------|----------------|--------------|
| REVISION NO.     | DESCRIPTION     | IMPLEMENTED BY | RELEASE DATE |
| 1.0              | Initial Release | Art Voss       | 28 Jan 2014  |

| TEST REPORT SIGN-OFF |                    |               |                    |
|----------------------|--------------------|---------------|--------------------|
| DEVICE TESTED BY     | REPORT PREPARED BY | QA REVIEW BY  | REPORT APPROVED BY |
| Art Voss             | Cheri Frangiadakis | Glen Westwell | Art Voss           |

|                         |                                                                                                                      |                |                     |                      |                   |              |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|--------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |              |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |              |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 3 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |


Test Lab Certificate No. 2470.01

## 1.0 INTRODUCTION

This measurement report demonstrates that the Nautic Devices Inc. Model: Yapalong4000 Wireless Portable Phone complies with the SAR (Specific Absorption Rate) RF exposure requirements FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The measurement procedures described in FCC KDB 865664 (see reference [3]), IC RSS-102 Issue 4 (see reference [4]), IEEE Standard 1528-2013 (see reference [5]) and IEC Standard 62209-2:2010 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (joystick), and remote control is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

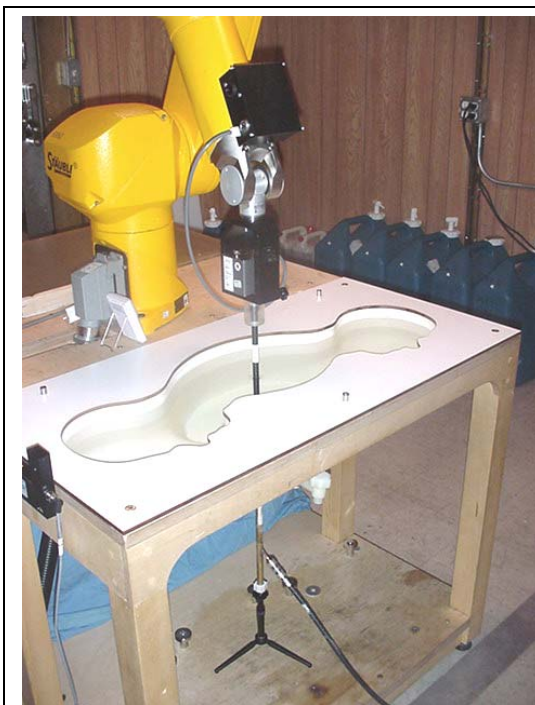

**DASY4 System with SAM Twin Phantom V4.0C**



**DASY4 Measurement Server**

|                         |                                                                                                                      |                |              |               |               |              |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|--------------|---------------|---------------|--------------|
| <b>Applicant:</b>       | Nautic Devices Inc.                                                                                                  | <b>FCC ID:</b> | UJW-4000     | <b>IC ID:</b> | 6695A-4000    |              |
| <b>DUT Type:</b>        | Wireless Portable Phone                                                                                              | <b>Models:</b> | Yapalong4000 |               | 902 – 928 MHz |              |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |              |               |               | Page 4 of 39 |


### 3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

| MEASURED RF CONDUCTED OUTPUT POWER LEVELS |                       |           |
|-------------------------------------------|-----------------------|-----------|
| Test Freq.                                | Conducted Power (dBm) |           |
| MHz                                       | Measured              | Max Rated |
| 903.401                                   | 25.38                 | 27        |
| 914.651                                   | 25.79                 | 27        |
| 926.651                                   | 25.44                 | 27        |

**Notes**


- The test channels were selected in accordance with the procedures specified in FCC KDB 447498 (see reference [8]).
- The RF conducted output power levels of the DUT were measured by Celltech Labs prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with requirements of FCC 47 CFR §2.1046 (see reference [13]) and IC RSS-Gen (see reference [14]).

#### 903.401 MHz

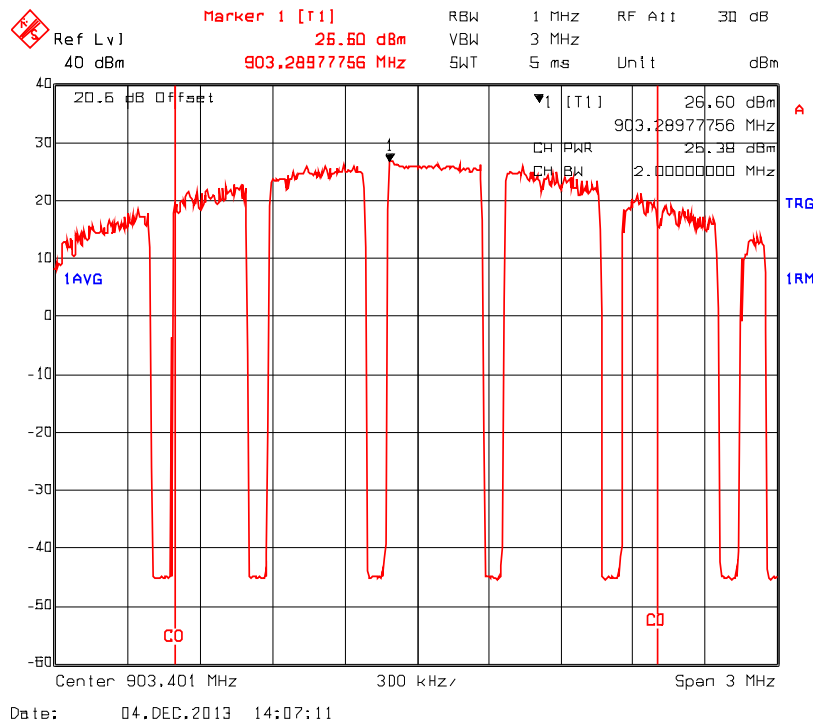


|                                                                                  |                                              |                                                    |                                            |                                                                                    |
|----------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------|
|  | Date(s) of Evaluation<br>January 19-23, 2014 | Test Report Serial No.<br>01282014UJW-1279         | Test Report Revision No.<br>1.0            |  |
|                                                                                  | Test Report Issue Date<br>28 Jan 2014        | Description of Test(s)<br>Specific Absorption Rate | RF Exposure Category<br>General Population |                                                                                    |

## 914.651 MHz

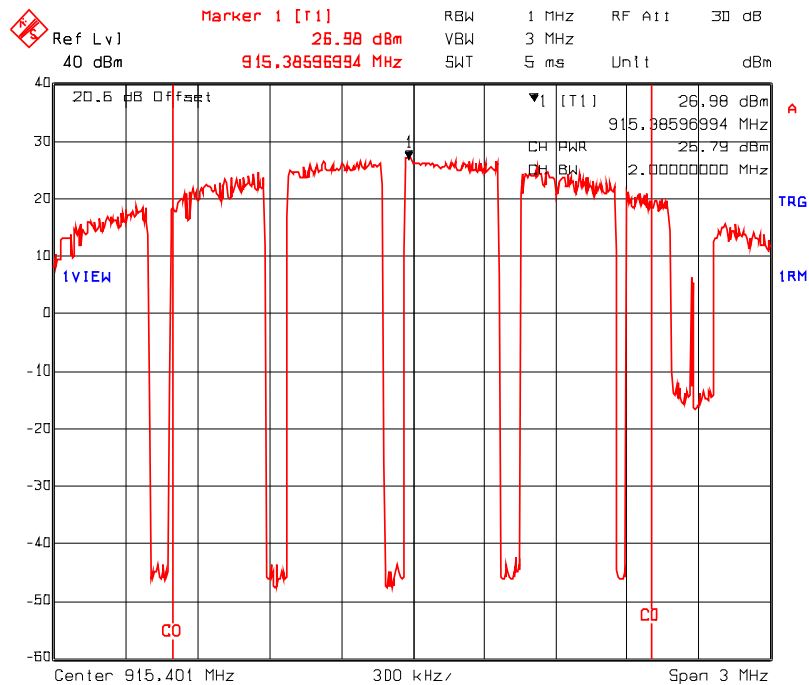

Date: 04.DEC.2013 14:13:20

## 926.651 MHz

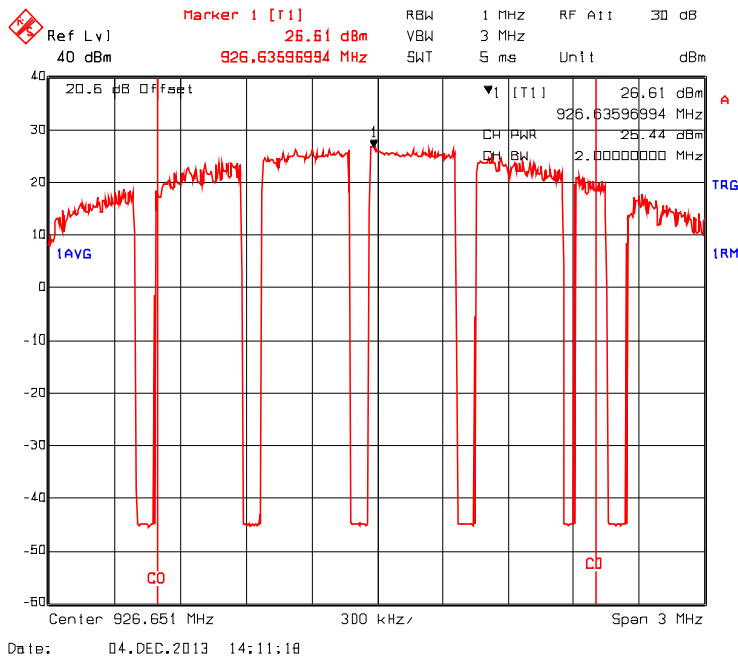

Date: 04.DEC.2013 14:11:18

|                         |                                                                                                                      |         |          |              |               |              |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|---------|----------|--------------|---------------|--------------|
| Applicant:              | Nautic Devices Inc.                                                                                                  | FCC ID: | UJW-4000 | IC ID:       | 6695A-4000    |              |
| DUT Type:               | Wireless Portable Phone                                                                                              |         | Models:  | Yapalong4000 | 902 – 928 MHz |              |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |         |          |              |               | Page 6 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## 4.0 FLUID DIELECTRIC PARAMETERS

| FLUID DIELECTRIC PARAMETERS |        |                    |          |          |                        |                        |
|-----------------------------|--------|--------------------|----------|----------|------------------------|------------------------|
| Date: 01/19,21,23/2014      |        | Frequency: 835 MHz |          |          | Tissue: Body           |                        |
| Freq                        | Test_e | Test_s             | Target_e | Target_s | Deviation Permittivity | Deviation Conductivity |
| 735.000                     | 54.66  | 0.92               | 55.59    | 0.96     | -1.67%                 | -4.17%                 |
| 745.000                     | 53.95  | 0.92               | 55.55    | 0.96     | -2.88%                 | -4.17%                 |
| 755.000                     | 54.42  | 0.93               | 55.51    | 0.96     | -1.96%                 | -3.12%                 |
| 765.000                     | 54.35  | 0.95               | 55.47    | 0.96     | -2.02%                 | -1.04%                 |
| 775.000                     | 54.19  | 0.97               | 55.43    | 0.97     | -2.24%                 | 0.00%                  |
| 785.000                     | 54.04  | 0.99               | 55.39    | 0.97     | -2.44%                 | 2.06%                  |
| 795.000                     | 54.25  | 0.98               | 55.36    | 0.97     | -2.01%                 | 1.03%                  |
| 805.000                     | 54.06  | 0.99               | 55.32    | 0.97     | -2.28%                 | 2.06%                  |
| 815.000                     | 53.65  | 0.99               | 55.28    | 0.97     | -2.95%                 | 2.06%                  |
| 825.000                     | 53.40  | 1.00               | 55.24    | 0.97     | -3.33%                 | 3.09%                  |
| 835.000                     | 53.80  | 1.02               | 55.20    | 0.97     | -2.54%                 | 5.15%                  |
| 845.000                     | 53.52  | 1.03               | 55.17    | 0.98     | -2.99%                 | 5.10%                  |
| 855.000                     | 53.21  | 1.04               | 55.14    | 0.99     | -3.50%                 | 5.05%                  |
| 865.000                     | 53.15  | 1.05               | 55.11    | 1.01     | -3.56%                 | 3.96%                  |
| 875.000                     | 53.20  | 1.07               | 55.08    | 1.02     | -3.41%                 | 4.90%                  |
| 885.000                     | 52.97  | 1.07               | 55.05    | 1.03     | -3.78%                 | 3.88%                  |
| 895.000                     | 52.89  | 1.07               | 55.02    | 1.04     | -3.87%                 | 2.88%                  |
| 903.401*                    | 53.22  | 1.08               | 55.00    | 1.05     | -3.24%                 | 2.86%                  |
| 905.000                     | 53.28  | 1.08               | 55.00    | 1.05     | -3.13%                 | 2.86%                  |
| 914.651*                    | 52.88  | 1.10               | 55.00    | 1.06     | -3.85%                 | 3.74%                  |
| 915.000                     | 52.87  | 1.10               | 55.00    | 1.06     | -3.87%                 | 3.77%                  |
| 925.000                     | 52.94  | 1.11               | 54.98    | 1.06     | -3.71%                 | 4.72%                  |
| 926.651*                    | 52.95  | 1.11               | 54.98    | 1.06     | -3.68%                 | 4.87%                  |
| 935.000                     | 52.50  | 1.12               | 54.96    | 1.07     | -4.48%                 | 4.67%                  |

\*interpolated using DASY4 software

| Test Date | Fluid Type | Ambient Temperature | Fluid Temperature | Fluid Depth | Atmospheric Pressure | Relative Humidity | $\rho$ (Kg/m <sup>3</sup> ) |
|-----------|------------|---------------------|-------------------|-------------|----------------------|-------------------|-----------------------------|
| Jan 19    | 835 Body   | 25°C                | 23.3°C            | ≥ 15 cm     | 102.6 kPa            | 15%               | 1000                        |
| Jan 21    | 835 Body   | 26°C                | 23.0°C            | ≥ 15 cm     | 103.4 kPa            | 12%               | 1000                        |
| Jan 23    | 835 Body   | 26°C                | 23.0°C            | ≥ 15 cm     | 103.4 kPa            | 14%               | 1000                        |

|                         |                         |                                                                                                                      |          |              |               |              |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|--------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |              |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |              |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 7 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## 5.0 SAR MEASUREMENT SUMMARY

### BODY-WORN SAR EVALUATION SUMMARY

| Test Date           | Plot #                                                                                                                                                                     | Freq.   | Test Mode                   | Crest Factor | Accessories attached to DUT |       | Spacing (cm) |              | Measured Conducted Power          | SAR Drift During Test | Measured SAR (1g) W/kg) |       |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------------------|--------------|-----------------------------|-------|--------------|--------------|-----------------------------------|-----------------------|-------------------------|-------|
|                     |                                                                                                                                                                            |         |                             |              |                             |       | Duty Cycle   |              |                                   |                       |                         |       |
|                     |                                                                                                                                                                            | MHz     |                             |              | Body                        | Audio | DUT          | Antenna      |                                   |                       | dBm                     | dB    |
| Jan 21              | B1                                                                                                                                                                         | 903.401 | FSK                         | 1.18         | Belt-Clip                   | -     | 1.0          | 1.5          | 25.38                             | -0.877                | 0.785                   | 0.065 |
| Jan 21              | B2                                                                                                                                                                         | 914.651 | FSK                         | 1.18         | Belt-Clip                   | -     | 1.0          | 1.5          | 25.79                             | -0.525                | 0.790                   | 0.066 |
| Jan 21              | B3                                                                                                                                                                         | 926.651 | FSK                         | 1.18         | Belt-Clip                   | -     | 1.0          | 1.5          | 25.44                             | -0.524                | 0.690                   | 0.058 |
| Jan 23              | B4                                                                                                                                                                         | 903.401 | GFSK                        | 1.18         | Belt-Clip                   | -     | 1.0          | 1.5          | 25.38                             | -0.576                | 0.797                   | 0.066 |
| Jan 23              | B5                                                                                                                                                                         | 914.651 | GFSK                        | 1.18         | Belt-Clip                   | -     | 1.0          | 1.5          | 25.79                             | -0.954                | 0.849                   | 0.071 |
| Jan 23              | B6                                                                                                                                                                         | 926.651 | GFSK                        | 1.18         | Belt-Clip                   | -     | 1.0          | 1.5          | 25.44                             | -0.669                | 0.727                   | 0.061 |
| SAR SAFETY LIMIT(S) |                                                                                                                                                                            |         |                             |              |                             |       | BODY         | SPATIAL PEAK | RF EXPOSURE CATEGORY              |                       |                         |       |
| FCC 47 CFR 2.1093   |                                                                                                                                                                            |         | Health Canada Safety Code 6 |              |                             |       | 1.6 W/kg     | 1g average   | General Population / Uncontrolled |                       |                         |       |
| Notes               |                                                                                                                                                                            |         |                             |              |                             |       |              |              |                                   |                       |                         |       |
| 1.                  | Detailed measurement data and plot showing the maximum SAR location of the DUT is reported in Appendix A.                                                                  |         |                             |              |                             |       |              |              |                                   |                       |                         |       |
| 2.                  | The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluation.                                                                          |         |                             |              |                             |       |              |              |                                   |                       |                         |       |
| 3.                  | The Lithium-Polymer battery installed in the DUT was fully charged prior to the SAR evaluation.                                                                            |         |                             |              |                             |       |              |              |                                   |                       |                         |       |
| 4.                  | The fluid temperature remained within +/-2°C from the dielectric parameter measurement to the completion of the SAR test.                                                  |         |                             |              |                             |       |              |              |                                   |                       |                         |       |
| 5.                  | The dielectric parameters of the simulated tissue mixture were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C). |         |                             |              |                             |       |              |              |                                   |                       |                         |       |
| 6.                  | Phantom: SAM Twin Phantom v4.0c                                                                                                                                            |         |                             |              |                             |       |              |              |                                   |                       |                         |       |

|                         |                         |                                                                                                                      |          |              |               |  |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|--|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |  |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |  |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               |  |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## 6.0 SAR SCALING

### SCALING OF MAXIMUM SAR LEVELS TO MANUFACTURER'S TUNE-UP TOLERANCE SPECIFICATION

| Plot                       | Test Freq.<br>(MHz) | Test Mode | Crest Factor | Cond. Power | Drift  | SAR Level 1g<br>(8.3% d/f) | Scaling up to Manuf.<br>Upper Tol. Power Spec. | Scaled SAR<br>(8.3% d/f)<br>1g (W/kg) |
|----------------------------|---------------------|-----------|--------------|-------------|--------|----------------------------|------------------------------------------------|---------------------------------------|
|                            |                     |           |              | Watts       | dB     | W/kg                       |                                                |                                       |
| FCC (scaled without drift) |                     |           |              |             |        |                            |                                                |                                       |
| B5                         | 914.651             | GFSK      | 1.18         | 25.79       | -0.954 | 0.071                      | 27 dB                                          | 0.093                                 |
| IC (with drift)            |                     |           |              |             |        |                            |                                                |                                       |
| B5                         | 914.651             | GFSK      | 1.18         | 25.79       | -0.954 | 0.071                      | 27 dB                                          | 0.116                                 |

#### Notes:

1. Only the highest SAR values for face and body per frequency band are scaled.
2. The resulting value is the reported SAR.
3. The scaled SAR levels are below the FCC/IC Occupational SAR Limit of 8.0 W/kg.
4. IC requires that the reported SAR also be scaled for the measured drift, therefore the above table calculates the SAR separately for IC.

|                         |                         |                                                                                                                      |          |              |               |              |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|--------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |              |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |              |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 9 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## 7.0 DETAILS OF SAR EVALUATION

- The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 (see reference [8]).
- Each SAR evaluation was performed with a fully charged battery.
- The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR drift was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data tables.
- The fluid temperature was measured prior to and after the SAR evaluations. The fluid temperature remained within +/- 2°C during the SAR evaluations.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
- The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
- The DUT was evaluated for SAR in accordance with the procedures described in FCC KDB 643646 D01v01 (see reference [9]).

## 8.0 SAR EVALUATION PROCEDURES

- The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
  - For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 30 mm x 30 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 10 of 39 |

|                                                                                  |                                              |                                                    |                                            |                                                                                    |
|----------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------|
|  | Date(s) of Evaluation<br>January 19-23, 2014 | Test Report Serial No.<br>01282014UJW-1279         | Test Report Revision No.<br>1.0            |  |
|                                                                                  | Test Report Issue Date<br>28 Jan 2014        | Description of Test(s)<br>Specific Absorption Rate | RF Exposure Category<br>General Population |                                                                                    |


Test Lab Certificate No. 2470.01

## 9.0 SYSTEM VERIFICATION

Prior to the SAR evaluations, system checks were performed with a planar phantom and SPEAG 835 MHz dipole (see Appendix B) in accordance with the procedures described in IEEE Standard 1528-2013 (see reference [5]) and IEC Standard 62209-2:2010 (see reference [6]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E).

### SYSTEM PERFORMANCE CHECK EVALUATIONS

| Test Date | Equiv. Tissue | SAR 1g (W/kg)                                                                                                                                                                                                |       |       | Dielectric Constant $\epsilon_r$ |       |       | Conductivity $\sigma$ (mho/m) |       |       | $\rho$ (Kg/m <sup>3</sup> ) | Amb. Temp. (°C) | Fluid Temp. (°C) | Fluid Depth (cm) | Humid. (%) | Barom. Press. (kPa) |
|-----------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|----------------------------------|-------|-------|-------------------------------|-------|-------|-----------------------------|-----------------|------------------|------------------|------------|---------------------|
|           | Freq. (MHz)   | SPEAG Target                                                                                                                                                                                                 | Meas. | Dev.  | SPEAG Target                     | Meas. | Dev.  | SPEAG Target                  | Meas. | Dev.  |                             |                 |                  |                  |            |                     |
| Jan 19    | Body 835      | 2.47 $\pm 10\%$                                                                                                                                                                                              | 2.5   | +1.2% | 55.2 $\pm 5\%$                   | 53.8  | -2.5% | 0.97 $\pm 5\%$                | 1.02  | +5.2% | 1000                        | 25              | 23.3             | $\geq 15$        | 15         | 102.6               |
| Notes     | 1.            | The target SAR values are the measured values from the SAR system manufacturer's dipole calibration (see Appendix E).                                                                                        |       |       |                                  |       |       |                               |       |       |                             |                 |                  |                  |            |                     |
|           | 2.            | The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).                                                                              |       |       |                                  |       |       |                               |       |       |                             |                 |                  |                  |            |                     |
|           | 3.            | The fluid temperature was measured prior to and after the system performance check evaluations. The fluid temperature remained within $\pm 2^\circ\text{C}$ during the system performance check evaluations. |       |       |                                  |       |       |                               |       |       |                             |                 |                  |                  |            |                     |
|           | 4.            | The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).                          |       |       |                                  |       |       |                               |       |       |                             |                 |                  |                  |            |                     |

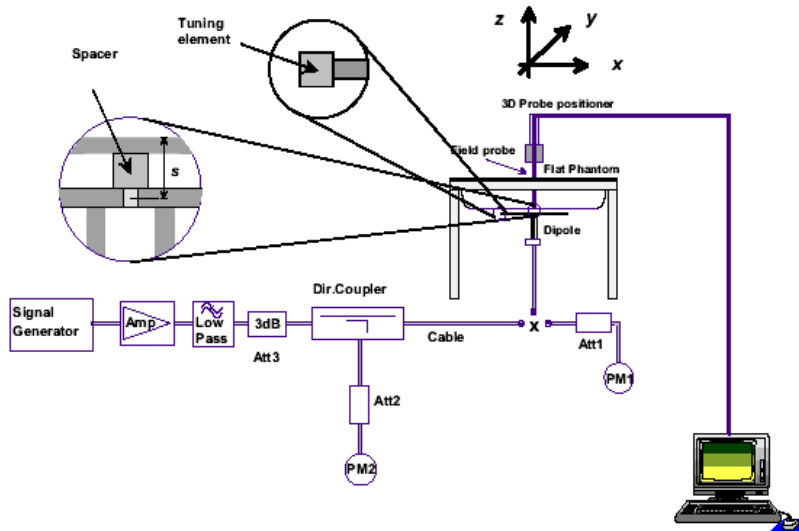

System Performance Check Measurement Setup (IEEE Standard 1528-2013)



SPEAG 835 MHz Validation Dipole Setup

|                         |                         |                                                                                                                      |          |              |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|---------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |               |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 11 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                                                                                                           |

## 10.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2013 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [7]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

| SIMULATED TISSUE MIXTURES |             |                             |         |                             |         |
|---------------------------|-------------|-----------------------------|---------|-----------------------------|---------|
| INGREDIENT                | Water       | 835 MHz Head Tissue Mixture | 40.71 % | 835 MHz Body Tissue Mixture | 53.79 % |
|                           | Sugar       |                             | 56.63 % |                             | 45.13 % |
|                           | Salt        |                             | 1.48 %  |                             | 0.98 %  |
|                           | HEC         |                             | 0.99 %  |                             | --      |
|                           | Bactericide |                             | 0.19 %  |                             | 0.10 %  |

## 11.0 SAR LIMITS

| SAR RF EXPOSURE LIMITS                                                                                                                                                                         |                             |                                              |                                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------------------------------------------|--------------------------------------|
| FCC 47 CFR 2.1093                                                                                                                                                                              | Health Canada Safety Code 6 | (General Population / Uncontrolled Exposure) | (Occupational / Controlled Exposure) |
| Spatial Average<br>(averaged over the whole body)                                                                                                                                              |                             | 0.08 W/kg                                    | 0.4 W/kg                             |
| Spatial Peak<br>(averaged over any 1 g of tissue)                                                                                                                                              |                             | 1.6 W/kg                                     | 8.0 W/kg                             |
| Spatial Peak<br>(hands/wrists/feet/ankles averaged over 10 g)                                                                                                                                  |                             | 4.0 W/kg                                     | 20.0 W/kg                            |
| The Spatial Average value of the SAR averaged over the whole body.                                                                                                                             |                             |                                              |                                      |
| The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.                              |                             |                                              |                                      |
| The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.                            |                             |                                              |                                      |
| Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.                              |                             |                                              |                                      |
| Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure. |                             |                                              |                                      |

|                         |                         |                                                                                                                      |          |              |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|---------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |               |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 12 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                                                                                                           |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                                                                                                           |

## 12.0 ROBOT SYSTEM SPECIFICATIONS

|                                                        |                                                                                   |
|--------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b><u>Specifications</u></b>                           |                                                                                   |
| <b>Positioner</b>                                      | Stäubli Unimation Corp. Robot Model: RX60L                                        |
| <b>Repeatability</b>                                   | 0.02 mm                                                                           |
| <b>No. of axis</b>                                     | 6                                                                                 |
| <b><u>Data Acquisition Electronic (DAE) System</u></b> |                                                                                   |
| <b><u>Cell Controller</u></b>                          |                                                                                   |
| <b>Processor</b>                                       | AMD Athlon XP 2400+                                                               |
| <b>Clock Speed</b>                                     | 2.0 GHz                                                                           |
| <b>Operating System</b>                                | Windows XP Professional                                                           |
| <b><u>Data Converter</u></b>                           |                                                                                   |
| <b>Features</b>                                        | Signal Amplifier, multiplexer, A/D converter, and control logic                   |
| <b>Software</b>                                        | Measurement Software: DASY4, V4.7 Build 80                                        |
|                                                        | Postprocessing Software: SEMCAD, V1.8 Build 186                                   |
| <b>Connecting Lines</b>                                | Optical downlink for data and status info., Optical uplink for commands and clock |
| <b><u>DASY4 Measurement Server</u></b>                 |                                                                                   |
| <b>Function</b>                                        | Real-time data evaluation for field measurements and surface detection            |
| <b>Hardware</b>                                        | PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM                              |
| <b>Connections</b>                                     | COM1, COM2, DAE, Robot, Ethernet, Service Interface                               |
| <b><u>E-Field Probe</u></b>                            |                                                                                   |
| <b>Model</b>                                           | ET3DV6                                                                            |
| <b>Serial No.</b>                                      | 1590                                                                              |
| <b>Construction</b>                                    | Triangular core fiber optic detection system                                      |
| <b>Frequency</b>                                       | 10 MHz to 6 GHz                                                                   |
| <b>Linearity</b>                                       | ±0.2 dB (30 MHz to 3 GHz)                                                         |
| <b><u>Phantom 1</u></b>                                |                                                                                   |
| <b>Type</b>                                            | SAM V4.0C                                                                         |
| <b>Shell Material</b>                                  | Fiberglass                                                                        |
| <b>Thickness</b>                                       | 2.0 ±0.1 mm                                                                       |
| <b>Volume</b>                                          | Approx. 25 liters                                                                 |

|                         |                                |                                                                                                                      |                     |                      |                   |               |
|-------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>     | <b>FCC ID:</b>                                                                                                       | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b> | <b>Models:</b>                                                                                                       | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                     |                      |                   | Page 13 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                                                                       |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |   |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                                                                       |

Test Lab Certificate No. 2470.01

### 13.0 PROBE SPECIFICATION (ET3DV6)

|                 |                                                                                                                                                          |                                                                                     |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Construction:   | Symmetrical design with triangular core;<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, glycol) |  |
| Calibration:    | In air from 10 MHz to 2.5 GHz<br>In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$ )                                   |                                                                                     |
| Frequency:      | 10 MHz to $> 6$ GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)                                                                                           |                                                                                     |
| Directivity:    | $\pm 0.2$ dB in head tissue (rotation around probe axis)<br>$\pm 0.4$ dB in head tissue (rotation normal to probe axis)                                  |                                                                                     |
| Dynamic Range:  | $5 \mu\text{W/g}$ to $> 100 \text{ mW/g}$ ; Linearity: $\pm 0.2$ dB                                                                                      |                                                                                     |
| Surface Detect: | $\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces                                                                     |                                                                                     |
| Dimensions:     | Overall length: 330 mm; Tip length: 16 mm;<br>Body diameter: 12 mm; Tip diameter: 6.8 mm<br>Distance from probe tip to dipole centers: 2.7 mm            |                                                                                     |
| Application:    | General dosimetry up to 3 GHz; Compliance tests of mobile phone                                                                                          | <b>ET3DV6 E-Field Probe</b>                                                         |

### 14.0 PHANTOM

|                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <p>The SAM Twin Phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (<math>\pm 0.2</math> mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections. See Appendix H for specifications of the SAM Twin Phantom V4.0C.</p> |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <b>SAM Twin Phantom V4.0C</b>                                                        |

### 15.0 DEVICE HOLDER

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of <math>65^\circ</math>. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p> |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <b>Device Holder</b>                                                                  |

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 14 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## 16.0 TEST EQUIPMENT LIST

| TEST EQUIPMENT |                                          | ASSET NO. | SERIAL NO. | DATE CALIBRATED | CALIBRATION INTERVAL |
|----------------|------------------------------------------|-----------|------------|-----------------|----------------------|
| USED           | DESCRIPTION                              |           |            |                 |                      |
| x              | Schmid & Partner DASY4 System            | -         | -          | -               | -                    |
| x              | -DASY4 Measurement Server                | 00158     | 1078       | CNR             | CNR                  |
| x              | -Robot                                   | 00046     | 599396-01  | CNR             | CNR                  |
| x              | -DAE4                                    | 00019     | 353        | 19-Apr-12       | Biennial             |
| x              | -ET3DV6 E-Field Probe                    | 00017     | 1590       | 24-Apr-13       | Annual               |
| x              | -D835V2 Validation Dipole                | 00217     | 4d075      | 20-Apr-12       | Triennial            |
| x              | SPEAG SAM Twin Phantom V4.0C             | 00154     | 1033       | CNR             | CNR                  |
| x              | HP 85070C Dielectric Probe Kit           | 00033     | none       | CNR             | CNR                  |
| x              | Gigatronics 8652A Power Meter            | 00007     | 1835272    | 03-May-12       | Biennial             |
| x              | Gigatronics 80701A Power Sensor          | 00014     | 1833542    | 03-May-12       | Biennial             |
| x              | Gigatronics 80334A Power Sensor          | -         | 1837001    | 03-May-12       | Biennial             |
| x              | HP 8753ET Network Analyzer               | 00134     | US39170292 | 26-Apr-12       | Biennial             |
| x              | Rohde & Schwarz SMR20 Signal Generator   | 00006     | 100104     | 02-May-12       | Biennial             |
| x              | Amplifier Research 5S1G4 Power Amplifier | 00106     | 26235      | CNR             | CNR                  |
| Abbr.          | CNR = Calibration Not Required           |           |            |                 |                      |

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 15 of 39 |

|                                                                                  |                                              |                                                    |                                            |                                                                                                                                                                       |
|----------------------------------------------------------------------------------|----------------------------------------------|----------------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Date(s) of Evaluation<br>January 19-23, 2014 | Test Report Serial No.<br>01282014UJW-1279         | Test Report Revision No.<br>1.0            |   |
|                                                                                  | Test Report Issue Date<br>28 Jan 2014        | Description of Test(s)<br>Specific Absorption Rate | RF Exposure Category<br>General Population |                                                                                                                                                                       |

Test Lab Certificate No. 2470.01

## 17.0 MEASUREMENT UNCERTAINTIES (IC)

### UNCERTAINTY BUDGET FOR DEVICE EVALUATION (IEC 62209-2:2010)

| Source of Uncertainty                                                    | IEC 62209-2 Section | Tolerance / Uncertainty $\pm\%$ | Probability Distribution | Divisor     | ci 1g | ci 10g | Standard Uncertainty $\pm\%$ (1g) | Standard Uncertainty $\pm\%$ (10g) | $V_i$ or $V_{eff}$ |
|--------------------------------------------------------------------------|---------------------|---------------------------------|--------------------------|-------------|-------|--------|-----------------------------------|------------------------------------|--------------------|
| <b>Measurement System</b>                                                |                     |                                 |                          |             |       |        |                                   |                                    |                    |
| Probe Calibration (835 MHz)                                              | 7.2.2.1             | 6.0                             | Normal                   | 1           | 1     | 1      | 6.0                               | 6.0                                | $\infty$           |
| Isotropy                                                                 | 7.2.2.2             | 4.7                             | Rectangular              | 1.732050808 | 1     | 1      | 2.7                               | 2.7                                | $\infty$           |
| Boundary Effect                                                          | 7.2.2.6             | 1                               | Rectangular              | 1.732050808 | 1     | 1      | 0.6                               | 0.6                                | $\infty$           |
| Linearity                                                                | 7.2.2.3             | 4.7                             | Rectangular              | 1.732050808 | 1     | 1      | 2.7                               | 2.7                                | $\infty$           |
| Detection Limits                                                         | 7.2.2.5             | 1                               | Rectangular              | 1.732050808 | 1     | 1      | 0.6                               | 0.6                                | $\infty$           |
| Readout Electronics                                                      | 7.2.2.7             | 0.3                             | Normal                   | 1           | 1     | 1      | 0.3                               | 0.3                                | $\infty$           |
| Response Time                                                            | 7.2.2.8             | 0.8                             | Rectangular              | 1.732050808 | 1     | 1      | 0.5                               | 0.5                                | $\infty$           |
| Integration Time                                                         | 7.2.2.9             | 2.6                             | Rectangular              | 1.732050808 | 1     | 1      | 1.5                               | 1.5                                | $\infty$           |
| RF Ambient Conditions                                                    | 7.2.4.5             | 3                               | Rectangular              | 1.732050808 | 1     | 1      | 1.7                               | 1.7                                | $\infty$           |
| Probe Positioner Mechanical Restrictions                                 | 7.2.3.1             | 0.4                             | Rectangular              | 1.732050808 | 1     | 1      | 0.2                               | 0.2                                | $\infty$           |
| Probe Positioning wrt Phantom Shell                                      | 7.2.3.3             | 2.9                             | Rectangular              | 1.732050808 | 1     | 1      | 1.7                               | 1.7                                | $\infty$           |
| Post-processing                                                          | 7.2.5               | 1                               | Rectangular              | 1.732050808 | 1     | 1      | 0.6                               | 0.6                                | $\infty$           |
| <b>Test Sample Related</b>                                               |                     |                                 |                          |             |       |        |                                   |                                    |                    |
| Test Sample Positioning                                                  | 7.2.3.4.3           | 2.9                             | Normal                   | 1           | 1     | 1      | 2.9                               | 2.9                                | 12                 |
| Device Holder Uncertainty                                                | 7.2.3.4.2           | 3.6                             | Normal                   | 1           | 1     | 1      | 3.6                               | 3.6                                | 8                  |
| Drift of Output Power (meas. SAR drift)                                  | 7.2.2.10            | 0                               | Rectangular              | 1.732050808 | 1     | 1      | 0.0                               | 0.0                                | $\infty$           |
| <b>Phantom and Tissue Parameters</b>                                     |                     |                                 |                          |             |       |        |                                   |                                    |                    |
| Phantom Uncertainty                                                      | 7.2.3.2             | 4                               | Rectangular              | 1.732050808 | 1     | 1      | 2.3                               | 2.3                                | $\infty$           |
| SAR Correction Algorithm for deviations in permittivity and conductivity | 7.2.4.3             | 1.9                             | Normal                   | 1           | 1     | 0.81   | 1.9                               | 1.54                               | $\infty$           |
| Liquid Conductivity (measured)                                           | 7.2.4.3             | 14.43                           | Normal                   | 1           | 0.78  | 0.71   | 11.3                              | 10.2                               | $\infty$           |
| Liquid Permittivity (measured)                                           | 7.2.4.3             | 4.17                            | Normal                   | 1           | 0.23  | 0.26   | 1.0                               | 1.1                                | $\infty$           |
| Liquid Permittivity - temp. uncertainty                                  | 7.2.4.4             | 1                               | Rectangular              | 1.732050808 | 0.78  | 0.71   | 0.5                               | 0.4                                | $\infty$           |
| Liquid Conductivity - temp. uncertainty                                  | 7.2.4.4             | 0.25                            | Rectangular              | 1.732050808 | 0.23  | 0.26   | 0.0                               | 0.0                                | $\infty$           |
| <b>Combined Standard Uncertainty</b>                                     | <b>7.3.1</b>        |                                 | <b>RSS</b>               |             |       |        | <b>14.77</b>                      | <b>13.98</b>                       |                    |
| <b>Expanded Uncertainty (95% Confidence Interval)</b>                    | <b>7.3.2</b>        |                                 | <b>k=2</b>               |             |       |        | <b>29.55</b>                      | <b>27.97</b>                       |                    |

Measurement Uncertainty Table in accordance with International Standard IEC 62209-2:2010

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 16 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## 18.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission, Office of Engineering and Technology - "SAR Measurement Requirements for 100 MHz to 6 GHz"; KDB 865664 D01v01r01: May 2013.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 4: March 2010.
- [5] IEEE Standard 1528-2013 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] International Standard IEC 62209-2 Edition 1.0 2010-03 - "Human exposure to radio frequency fields from hand-held & body-mounted wireless communication devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".
- [7] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v05r01: May 2013.
- [9] Federal Communications Commission, Office of Engineering and Technology - "SAR Test Reduction Considerations for Occupational PTT Radios", KDB 643646 D01v01r01: April 2011.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [12] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [13] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.
- [14] Industry Canada - "General Requirements and Information for the Certification of Radiocommunication Equipment", Radio Standards Specification RSS-Gen Issue 3: December 2010.

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 17 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## APPENDIX A - SAR MEASUREMENT PLOTS

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 18 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## Plot B1

Date Tested: 01/21/2014

**DUT: Yapalong; Type: FSK/GFSK; Serial: Not Specified**

Program Notes: 21 Jan 2014, Ambient Temp: 26C; Fluid Temp: 23.0C; Barometric Pressure: 103.4 kPa; Humidity: 12%

Communication System: CW

Frequency: 903.4 MHz; Duty Cycle: 1:1.18

Medium: M835 Medium parameters used (interpolated):  $f = 903.4 \text{ MHz}$ ;  $\sigma = 1.08 \text{ mho/m}$ ;  $\epsilon_r = 53.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body 903.401MHz FSK, Crest = 1.18, Belt Clip 2/Area Scan (8x19x1):** Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.938 mW/g

**Body 903.401MHz FSK, Crest = 1.18, Belt Clip 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 29.3 V/m; Power Drift = -0.877 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.785 mW/g; SAR(10 g) = 0.519 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.845 mW/g

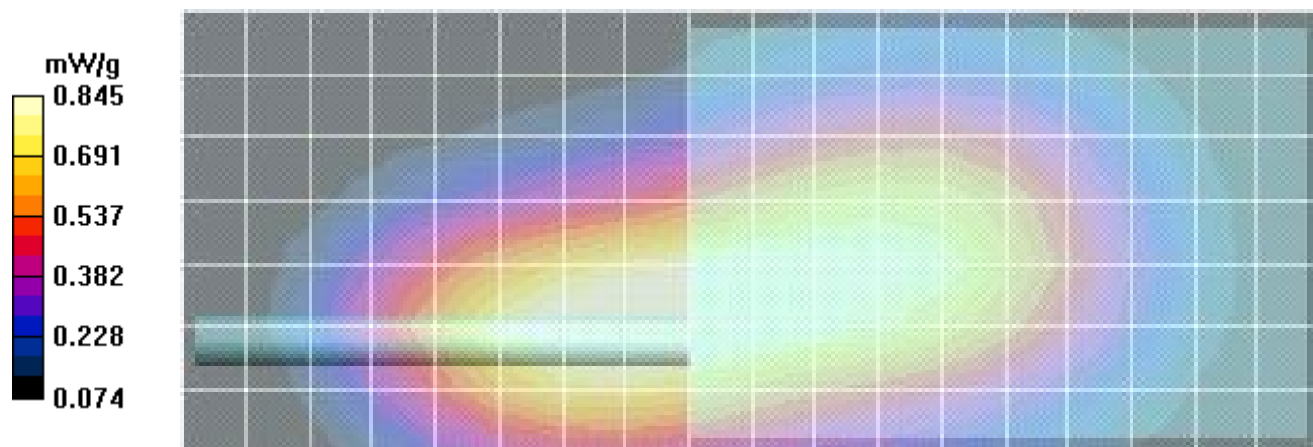

|                         |                         |                                                                                                                      |          |              |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|---------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |               |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 19 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                       |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                       |

## Plot B2

Date Tested: 01/21/2014

**DUT: Yapalong; Type: FSK/GFSK; Serial: Not Specified**

Program Notes: 21 Jan 2014, Ambient Temp: 26C; Fluid Temp: 23.0C; Barometric Pressure: 103.4 kPa; Humidity: 12%

Communication System: CW

Frequency: 914.651 MHz; Duty Cycle: 1:1.18

Medium: M835 Medium parameters used:  $f = 915 \text{ MHz}$ ;  $\sigma = 1.1 \text{ mho/m}$ ;  $\epsilon_r = 52.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body 914.651MHz FSK, Crest = 1.18, Belt Clip/Area Scan (8x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
Maximum value of SAR (measured) = 0.930 mW/g


**Body 914.651MHz FSK, Crest = 1.18, Belt Clip/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 28.3 V/m; Power Drift = -0.525 dB

Peak SAR (extrapolated) = 1.16 W/kg


**SAR(1 g) = 0.790 mW/g; SAR(10 g) = 0.526 mW/g**

Maximum value of SAR (measured) = 0.850 mW/g

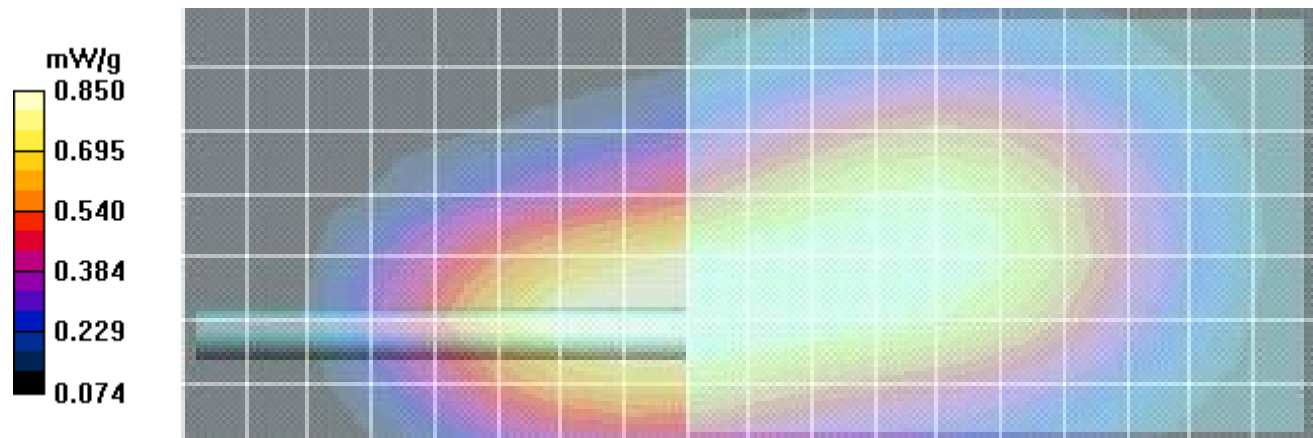


|                         |                                                                                                                      |         |          |              |               |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|---------|----------|--------------|---------------|---------------|
| Applicant:              | Nautic Devices Inc.                                                                                                  | FCC ID: | UJW-4000 | IC ID:       | 6695A-4000    |               |
| DUT Type:               | Wireless Portable Phone                                                                                              |         | Models:  | Yapalong4000 | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |         |          |              |               | Page 20 of 39 |

## SAR vs Time

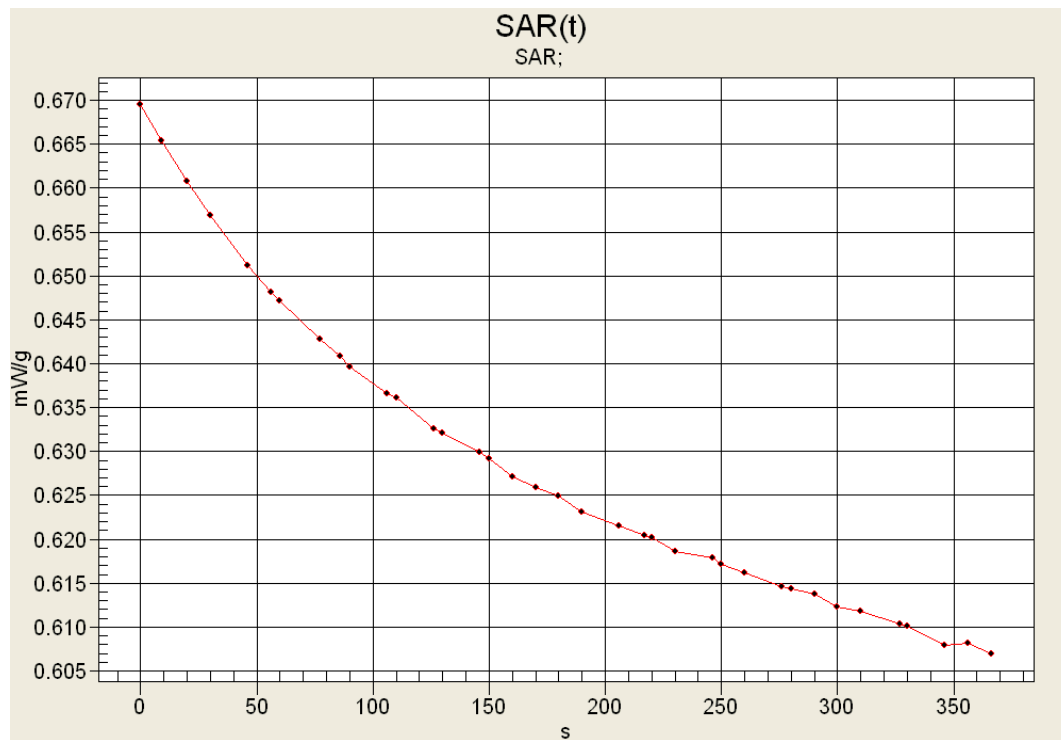

## Z-Scan

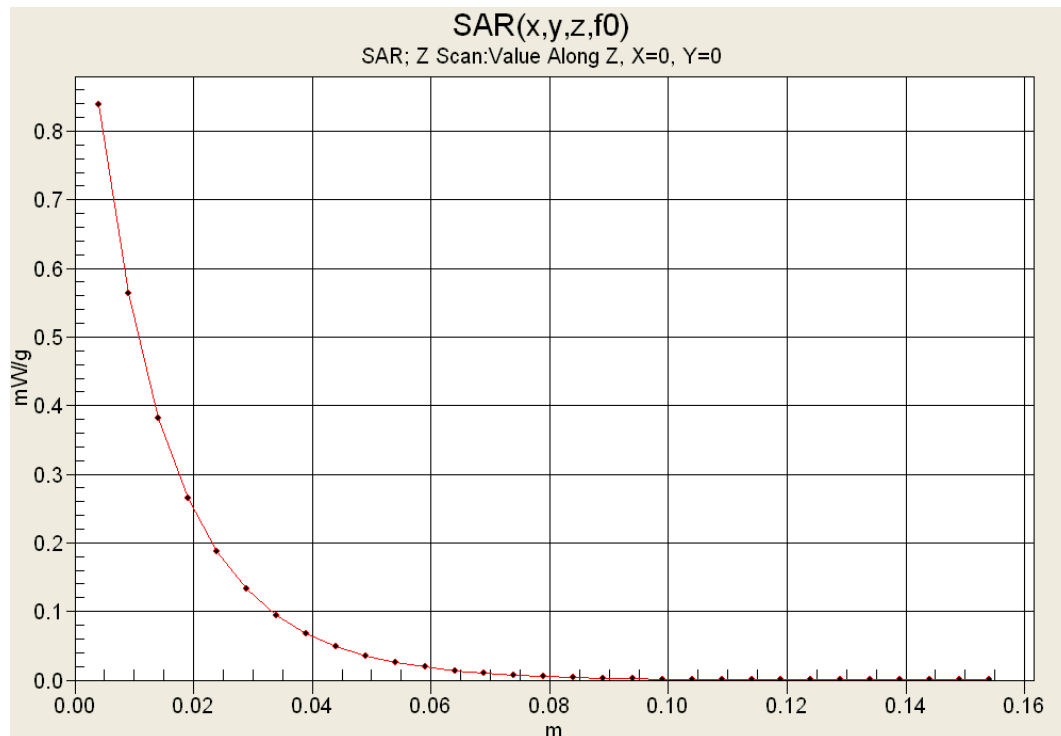

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

### Plot B3

Date Tested: 01/21/2014

**DUT: Yapalong; Type: FSK/GFSK; Serial: Not Specified**

Program Notes: 21 Jan 2014, Ambient Temp: 26C; Fluid Temp: 23.0C; Barometric Pressure: 103.4 kPa; Humidity: 12%

Communication System: CW

Frequency: 926.651 MHz; Duty Cycle: 1:1.18

Medium: M835 Medium parameters used (interpolated):  $f = 926.651 \text{ MHz}$ ;  $\sigma = 1.11 \text{ mho/m}$ ;  $\epsilon_r = 52.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body 926.651MHz FSK, Crest = 1.18, Belt Clip/Area Scan (8x19x1):** Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.787 mW/g

**Body 926.651MHz FSK, Crest = 1.18, Belt Clip/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 26.5 V/m; Power Drift = -0.524 dB

Peak SAR (extrapolated) = 0.931 W/kg

**SAR(1 g) = 0.690 mW/g; SAR(10 g) = 0.488 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.731 mW/g

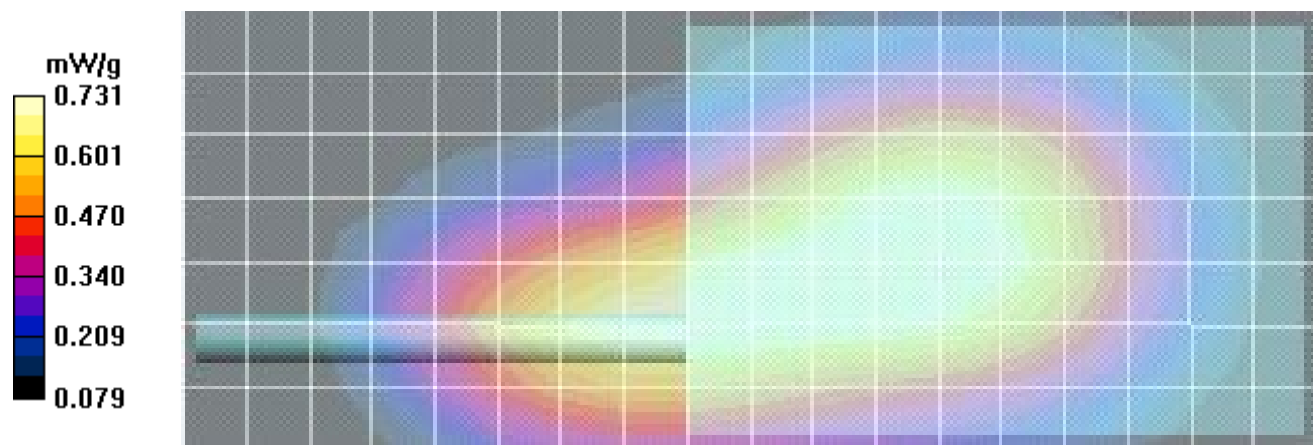

|                         |                                                                                                                      |                |              |               |               |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|--------------|---------------|---------------|---------------|
| <b>Applicant:</b>       | Nautic Devices Inc.                                                                                                  | <b>FCC ID:</b> | UJW-4000     | <b>IC ID:</b> | 6695A-4000    |               |
| <b>DUT Type:</b>        | Wireless Portable Phone                                                                                              | <b>Models:</b> | Yapalong4000 |               | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |              |               |               | Page 22 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## Plot B4

Date Tested: 01/23/2014

**DUT: Yapalong; Type: FSK/GFSK; Serial: Not Specified**

Program Notes: 23 Jan 2014, Ambient Temp: 26C; Fluid Temp: 23.0C; Barometric Pressure: 103.4 kPa; Humidity: 14%

Communication System: CW

Frequency: 903.4 MHz; Duty Cycle: 1:1.18

Medium: M835 Medium parameters used (interpolated):  $f = 903.4 \text{ MHz}$ ;  $\sigma = 1.08 \text{ mho/m}$ ;  $\epsilon_r = 53.2$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body 903.401MHz GFSK, Crest = 1.18, Belt Clip 2/Area Scan (8x19x1):** Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.893 mW/g

**Body 903.401MHz GFSK, Crest = 1.18, Belt Clip 2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 23.2 V/m; Power Drift = -0.576 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.797 mW/g; SAR(10 g) = 0.519 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.857 mW/g

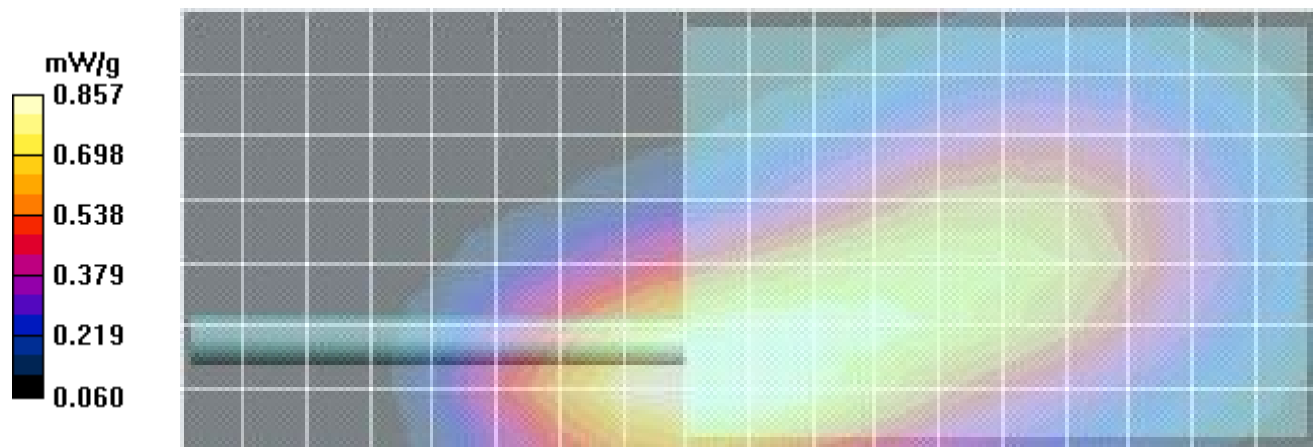

|                         |                         |                                                                                                                      |          |              |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|---------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |               |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 23 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## Plot B5

Date Tested: 01/23/2014

**DUT: Yapalong; Type: FSK/GFSK; Serial: Not Specified**

Program Notes: 23 Jan 2014, Ambient Temp: 26C; Fluid Temp: 23.0C; Barometric Pressure: 103.4 kPa; Humidity: 14%

Communication System: CW

Frequency: 914.651 MHz; Duty Cycle: 1:1.18

Medium: M835 Medium parameters used:  $f = 915 \text{ MHz}$ ;  $\sigma = 1.1 \text{ mho/m}$ ;  $\epsilon_r = 52.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body 914.651MHz GFSK, Crest = 1.18, Belt Clip/Area Scan (8x19x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
Maximum value of SAR (measured) = 1.02 mW/g


**Body 914.651MHz GFSK, Crest = 1.18, Belt Clip/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.4 V/m; Power Drift = -0.954 dB

Peak SAR (extrapolated) = 1.24 W/kg


**SAR(1 g) = 0.849 mW/g; SAR(10 g) = 0.553 mW/g**

Maximum value of SAR (measured) = 0.915 mW/g

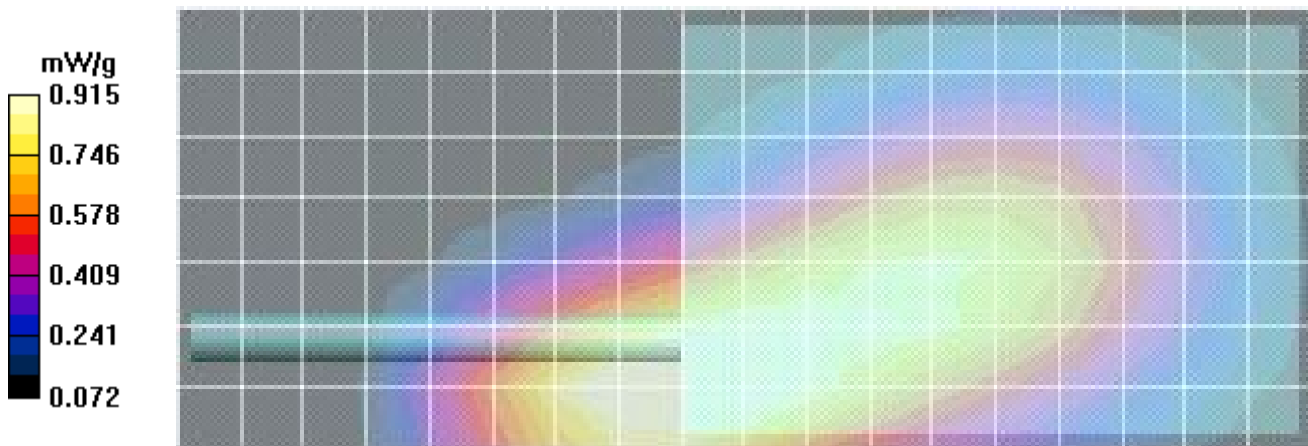


|                         |                         |                                                                                                                      |                |               |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------|---------------|---------------|
| <b>Applicant:</b>       | Nautic Devices Inc.     | <b>FCC ID:</b>                                                                                                       | UJW-4000       | <b>IC ID:</b> | 6695A-4000    |               |
| <b>DUT Type:</b>        | Wireless Portable Phone |                                                                                                                      | <b>Models:</b> | Yapalong4000  | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |               |               | Page 24 of 39 |

## SAR vs Time

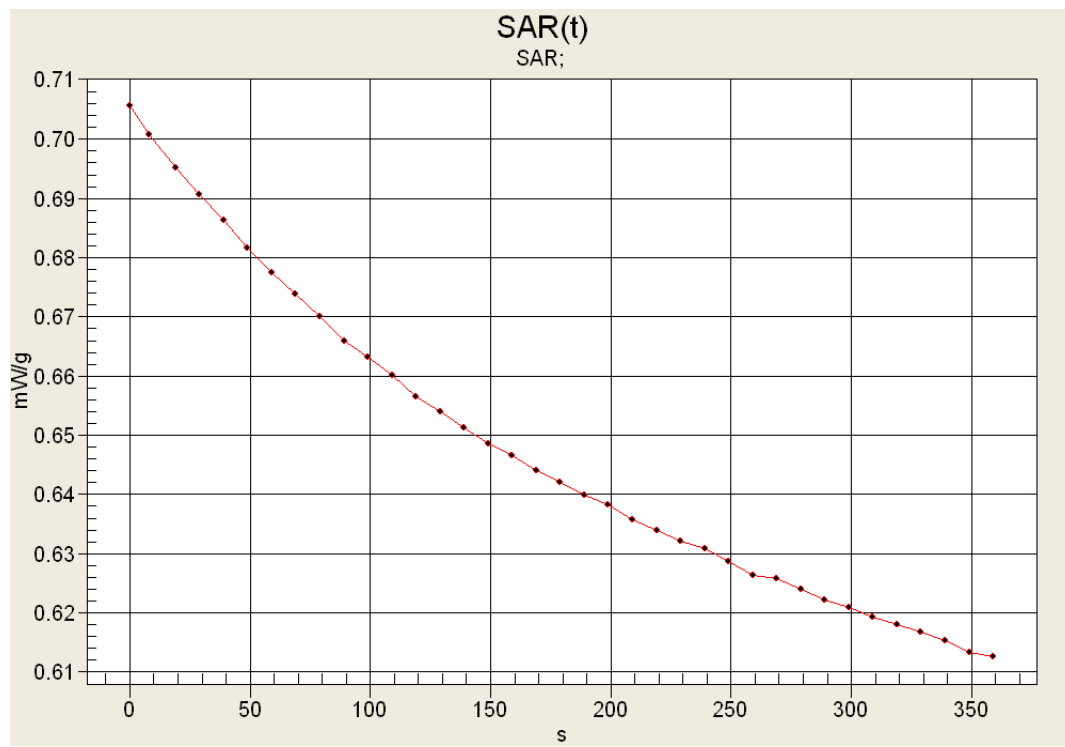

## Z-Scan

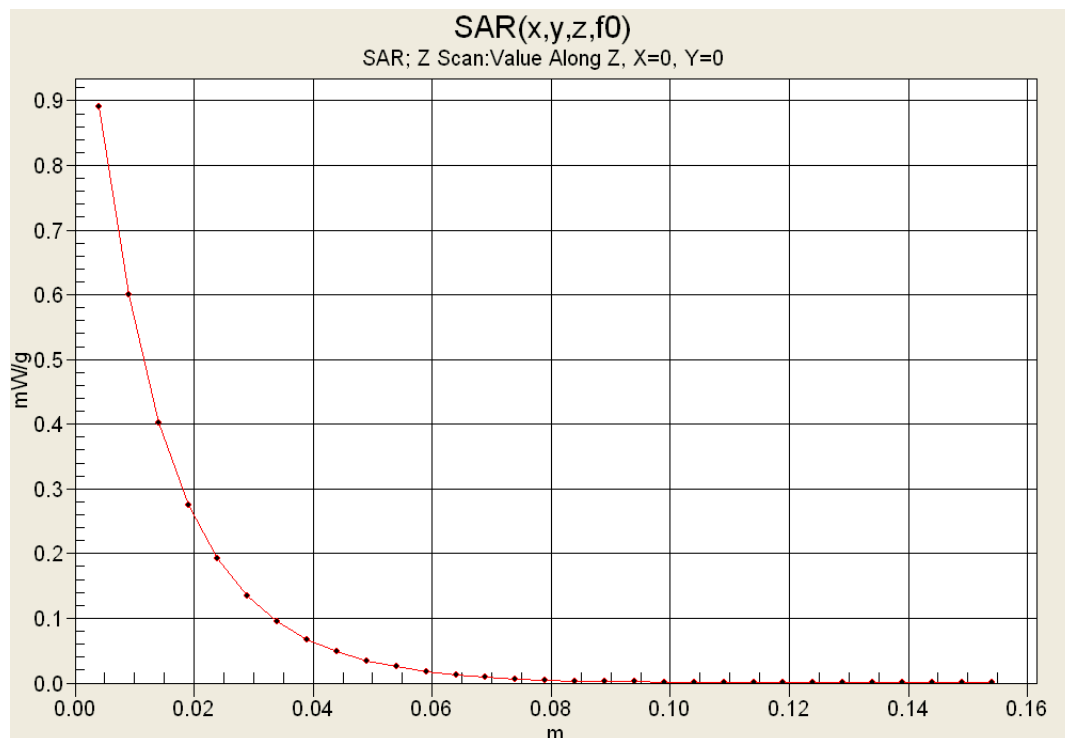

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## Plot B6

Date Tested: 01/23/2014

**DUT: Yapalong; Type: FSK/GFSK; Serial: Not Specified**

Program Notes: 23 Jan 2014, Ambient Temp: 26C; Fluid Temp: 23.0C; Barometric Pressure: 103.4 kPa; Humidity: 14%

Communication System: CW

Frequency: 926.651 MHz; Duty Cycle: 1:1.18

Medium: M835 Medium parameters used (interpolated):  $f = 926.651 \text{ MHz}$ ;  $\sigma = 1.11 \text{ mho/m}$ ;  $\epsilon_r = 52.9$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Body 926.651MHz GFSK, Crest = 1.18, Belt Clip/Area Scan (8x19x1):** Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.806 mW/g

**Body 926.651MHz GFSK, Crest = 1.18, Belt Clip/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 23.4 V/m; Power Drift = -0.669 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.474 mW/g**

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.784 mW/g

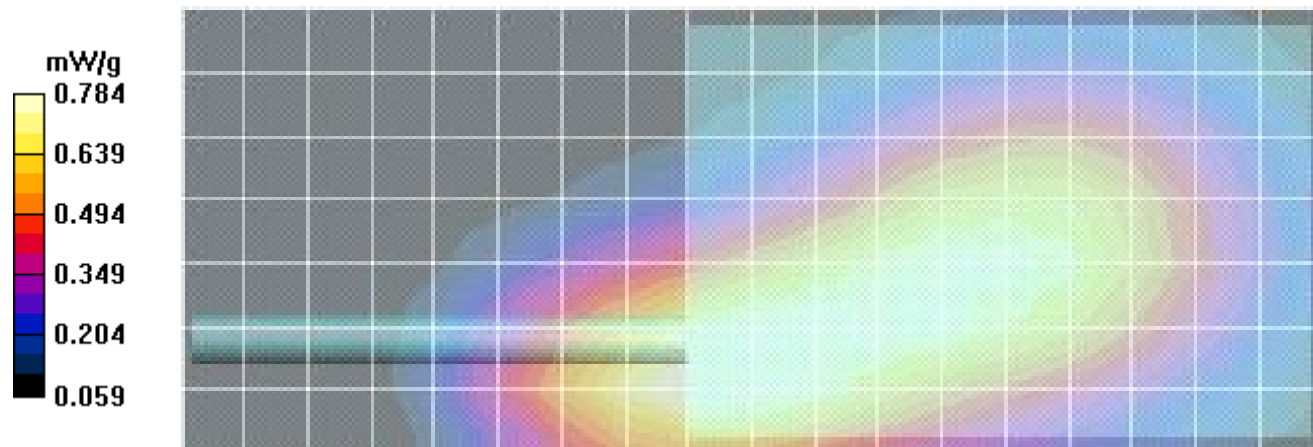

|                         |                         |                                                                                                                      |          |              |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------|--------------|---------------|---------------|
| Applicant:              | Nautic Devices Inc.     | FCC ID:                                                                                                              | UJW-4000 | IC ID:       | 6695A-4000    |               |
| DUT Type:               | Wireless Portable Phone |                                                                                                                      | Models:  | Yapalong4000 | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |          |              |               | Page 26 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## APPENDIX B - SYSTEM PERFORMANCE CHECK PLOTS

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 27 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## System Performance Check - 835 MHz Body

Date Tested: 01/19/2014

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d075; Calibrated: 04/20/2012**

Program Notes: 19 Jan 2014, Ambient Temp: 25C; Fluid Temp: 23.3C; Barometric Pressure: 102.6 kPa; Humidity: 15%

Procedure Notes:

Communication System: CW

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M835 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 1.02 \text{ mho/m}$ ;  $\epsilon_r = 53.8$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(6.67, 6.67, 6.67); Calibrated: 24/04/2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 19/04/2012
- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Head d=15mm Pin=250mW/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.62 mW/g


**Head d=15mm Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.9 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 3.64 W/kg


**SAR(1 g) = 2.5 mW/g; SAR(10 g) = 1.65 mW/g**

Maximum value of SAR (measured) = 2.71 mW/g

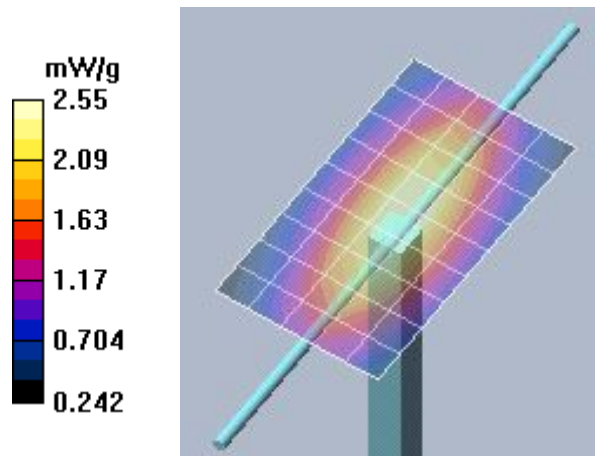

|                         |                         |                                                                                                                      |                |               |               |               |
|-------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------|---------------|---------------|
| <b>Applicant:</b>       | Nautic Devices Inc.     | <b>FCC ID:</b>                                                                                                       | UJW-4000       | <b>IC ID:</b> | 6695A-4000    |               |
| <b>DUT Type:</b>        | Wireless Portable Phone |                                                                                                                      | <b>Models:</b> | Yapalong4000  | 902 – 928 MHz |               |
| 2013 Celltech Labs Inc. |                         | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |               |               | Page 28 of 39 |

## Z-Scan

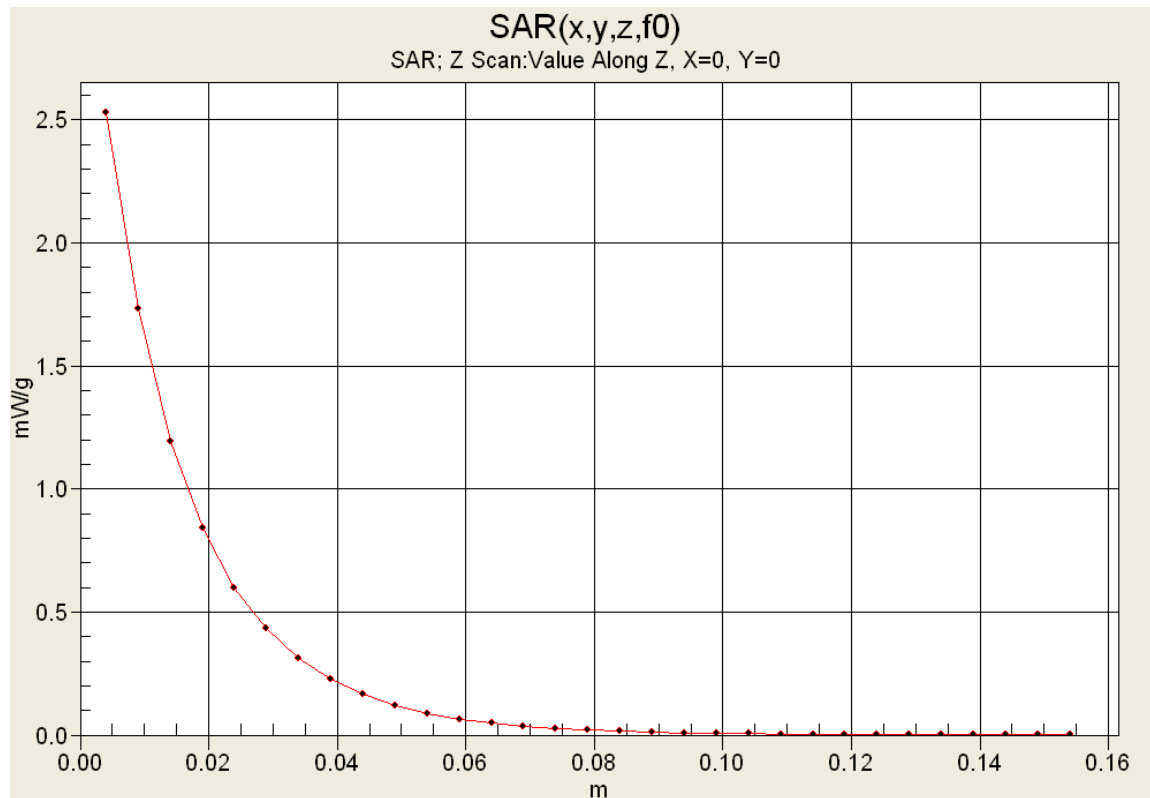

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 30 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

### 835 MHz Body

\*\*\*\*\*

Celltech Labs Inc,  
Test Result for UIM Dielectric Parameter  
19/Jan/2014  
Frequency(GHz)  
FCC\_eB FCC Limits for Body Epsilon  
FCC\_sB FCC Limits for Body Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

| Freq   | FCC_eB | FCC_sB | Test_e | Test_s |
|--------|--------|--------|--------|--------|
| 0.7350 | 55.59  | 0.96   | 54.66  | 0.92   |
| 0.7450 | 55.55  | 0.96   | 53.95  | 0.92   |
| 0.7550 | 55.51  | 0.96   | 54.42  | 0.93   |
| 0.7650 | 55.47  | 0.96   | 54.35  | 0.95   |
| 0.7750 | 55.43  | 0.97   | 54.19  | 0.97   |
| 0.7850 | 55.39  | 0.97   | 54.04  | 0.99   |
| 0.7950 | 55.36  | 0.97   | 54.25  | 0.98   |
| 0.8050 | 55.32  | 0.97   | 54.06  | 0.99   |
| 0.8150 | 55.28  | 0.97   | 53.65  | 0.99   |
| 0.8250 | 55.24  | 0.97   | 53.40  | 1.00   |
| 0.8350 | 55.20  | 0.97   | 53.80  | 1.02   |
| 0.8450 | 55.17  | 0.98   | 53.52  | 1.03   |
| 0.8550 | 55.14  | 0.99   | 53.21  | 1.04   |
| 0.8650 | 55.11  | 1.01   | 53.15  | 1.05   |
| 0.8750 | 55.08  | 1.02   | 53.20  | 1.07   |
| 0.8850 | 55.05  | 1.03   | 52.97  | 1.07   |
| 0.8950 | 55.02  | 1.04   | 52.89  | 1.07   |
| 0.9050 | 55.00  | 1.05   | 53.28  | 1.08   |
| 0.9150 | 55.00  | 1.06   | 52.87  | 1.10   |
| 0.9250 | 54.98  | 1.06   | 52.94  | 1.11   |
| 0.9350 | 54.96  | 1.07   | 52.50  | 1.12   |

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 31 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 32 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS




**Body-worn SAR Configuration Test Setup with Belt-Clip**

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 33 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                                                                       |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |   |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                                                                       |

Test Lab Certificate No. 2470.01

## BODY-WORN SAR TEST SETUP PHOTOGRAPHS

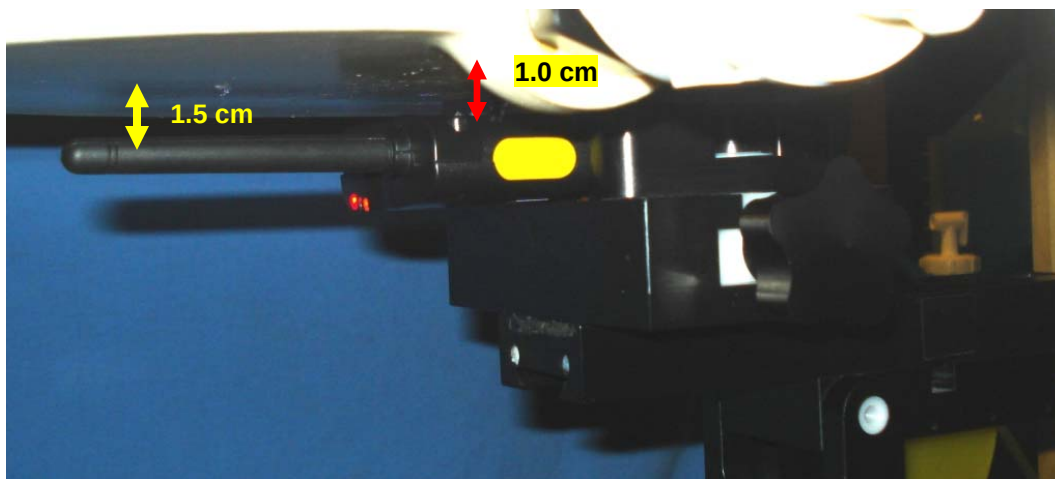

Body-worn SAR Configuration

|                         |                                                                                                                      |                |              |                      |            |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|--------------|----------------------|------------|---------------|
| <b>Applicant:</b>       | Nautic Devices Inc.                                                                                                  | <b>FCC ID:</b> | UJW-4000     | <b>IC ID:</b>        | 6695A-4000 |               |
| <b>DUT Type:</b>        | Wireless Portable Phone                                                                                              | <b>Models:</b> | Yapalong4000 | <b>902 – 928 MHz</b> |            |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |              |                      |            | Page 34 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## DUT PHOTOGRAPHS



Front Side



Back Side



Left Side



Right Side

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 35 of 39 |


|                                                                                  |                                                     |                                                           |                                                   |                                                                                                                        |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                                                        |



Bottom Side



Top Side

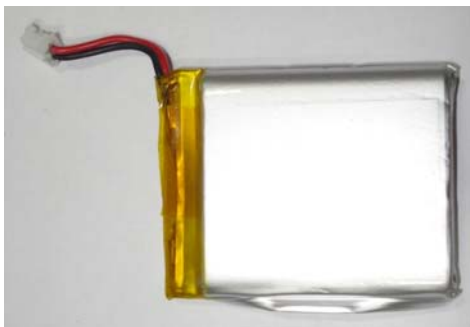

Lithium Polymer Battery



Device Used for Measuring Conducted Power

|                         |                                |                                                                                                                      |                     |                      |                   |               |
|-------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>     | <b>FCC ID:</b>                                                                                                       | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b> | <b>Models:</b>                                                                                                       | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                     |                      |                   | Page 36 of 39 |

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## APPENDIX E - DIPOLE CALIBRATION

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 37 of 39 |

|                                                                                  |                                            |                                 |                                                                                                                        |
|----------------------------------------------------------------------------------|--------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------|
|  | <u>Date:</u><br>Aug 19, 2013               | <u>Revision No.</u><br>Rev. 1.1 | <br>Test Lab Certificate No. 2470.01 |
|                                                                                  | <b>835 MHz Dipole Extended Calibration</b> |                                 |                                                                                                                        |

Dipole: D835V2  
Serial Number: 4d075  
Last Calibrated: Apr. 20, 2012

| Antenna Parameters with Head TSL     |                          |                       |                                  |                       |                     |                       |
|--------------------------------------|--------------------------|-----------------------|----------------------------------|-----------------------|---------------------|-----------------------|
|                                      | Impedance<br>Real (ohms) | Deviation<br>from cal | Impedance<br>Imaginary<br>(ohms) | Deviation<br>from cal | Return Loss<br>(dB) | Deviation<br>from Cal |
| <b>Last Calibration</b>              | 51.4                     | -                     | -4.6                             | -                     | -26.5               | -                     |
| <b>Extended Cal<br/>Aug 14, 2013</b> | 50.9                     | 0.5                   | -3.6                             | 1.0                   | -28.4               | 7.2%                  |
|                                      |                          |                       |                                  |                       |                     |                       |

| Antenna Parameters with Body TSL      |                          |                                 |                                  |                                 |                     |                              |
|---------------------------------------|--------------------------|---------------------------------|----------------------------------|---------------------------------|---------------------|------------------------------|
|                                       | Impedance<br>Real (ohms) | Deviation<br>from cal<br>(ohms) | Impedance<br>Imaginary<br>(ohms) | Deviation<br>from cal<br>(ohms) | Return Loss<br>(dB) | Deviation<br>from Cal<br>(%) |
| <b>Last Calibration</b>               | 46.8                     | -                               | -6.2                             | -                               | -22.8               | -                            |
| <b>Extended Cal<br/>Aug. 19, 2013</b> | 45.9                     | 0.9                             | -6.3                             | 0.1                             | -22.2               | 2.6%                         |
|                                       |                          |                                 |                                  |                                 |                     |                              |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **D835V2-4d075\_Apr12**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d075**

Calibration procedure(s) **QA CAL-05.v8**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **April 20, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)     | Scheduled Calibration |
|-----------------------------|--------------------|--------------------------------|-----------------------|
| Power meter EPM-442A        | GB37480704         | 05-Oct-11 (No. 217-01451)      | Oct-12                |
| Power sensor HP 8481A       | US37292783         | 05-Oct-11 (No. 217-01451)      | Oct-12                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 27-Mar-12 (No. 217-01530)      | Apr-13                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 27-Mar-12 (No. 217-01533)      | Apr-13                |
| Reference Probe ES3DV3      | SN: 3205           | 30-Dec-11 (No. ES3-3205_Dec11) | Dec-12                |
| DAE4                        | SN: 601            | 04-Jul-11 (No. DAE4-601_Jul11) | Jul-12                |

| Secondary Standards       | ID #             | Check Date (in house)             | Scheduled Check        |
|---------------------------|------------------|-----------------------------------|------------------------|
| Power sensor HP 8481A     | MY41092317       | 18-Oct-02 (in house check Oct-11) | In house check: Oct-13 |
| RF generator R&S SMT-06   | 100005           | 04-Aug-99 (in house check Oct-11) | In house check: Oct-13 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (in house check Oct-11) | In house check: Oct-12 |

|                |                |                       |           |
|----------------|----------------|-----------------------|-----------|
|                | Name           | Function              | Signature |
| Calibrated by: | Israe El-Naouq | Laboratory Technician |           |
| Approved by:   | Katja Pokovic  | Technical Manager     |           |

Issued: April 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.8.1     |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 15 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 41.1 $\pm$ 6 % | 0.90 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                  |
| SAR measured                                                | 250 mW input power | 2.36 mW / g                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>9.42 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 1.55 mW / g                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>6.19 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 54.5 $\pm$ 6 % | 1.01 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                  |
| SAR measured                                                | 250 mW input power | 2.47 mW / g                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>9.56 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 1.62 mW / g                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>6.31 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.4 $\Omega$ - 4.6 j $\Omega$ |
| Return Loss                          | - 26.5 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.8 $\Omega$ - 6.2 j $\Omega$ |
| Return Loss                          | - 22.8 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.395 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | November 09, 2007 |

## DASY5 Validation Report for Head TSL

Date: 20.04.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d075**

Communication System: CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.9 \text{ mho/m}$ ;  $\epsilon_r = 41.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.07, 6.07, 6.07); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.890 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.477 mW/g


**SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.55 mW/g**

Maximum value of SAR (measured) = 2.74 mW/g

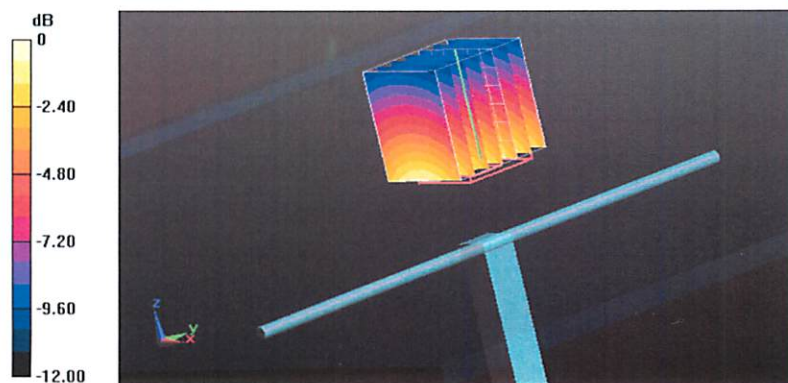

0 dB = 2.74 mW/g = 8.76 dB mW/g

Impedance Measurement Plot for Head TSL

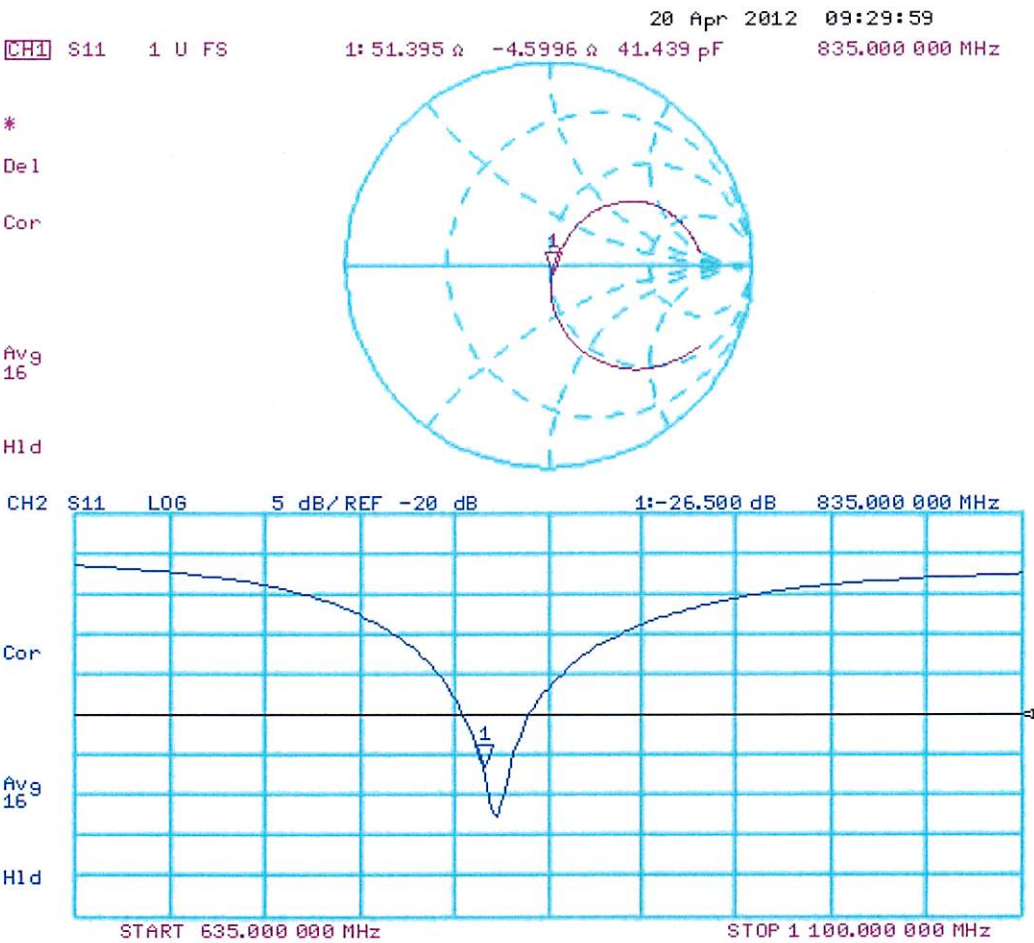

## DASY5 Validation Report for Body TSL

Date: 19.04.2012

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d075**

Communication System: CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 1.01 \text{ mho/m}$ ;  $\epsilon_r = 54.5$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.02, 6.02, 6.02); Calibrated: 30.12.2011;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.07.2011
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.1(838); SEMCAD X 14.6.5(6469)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 55.283 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.580 mW/g


**SAR(1 g) = 2.47 mW/g; SAR(10 g) = 1.62 mW/g**

Maximum value of SAR (measured) = 2.87 mW/g

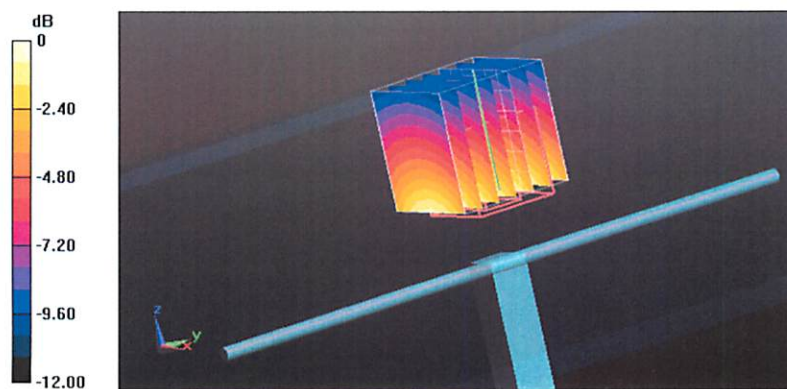

0 dB = 2.87 mW/g = 9.16 dB mW/g

## Impedance Measurement Plot for Body TSL

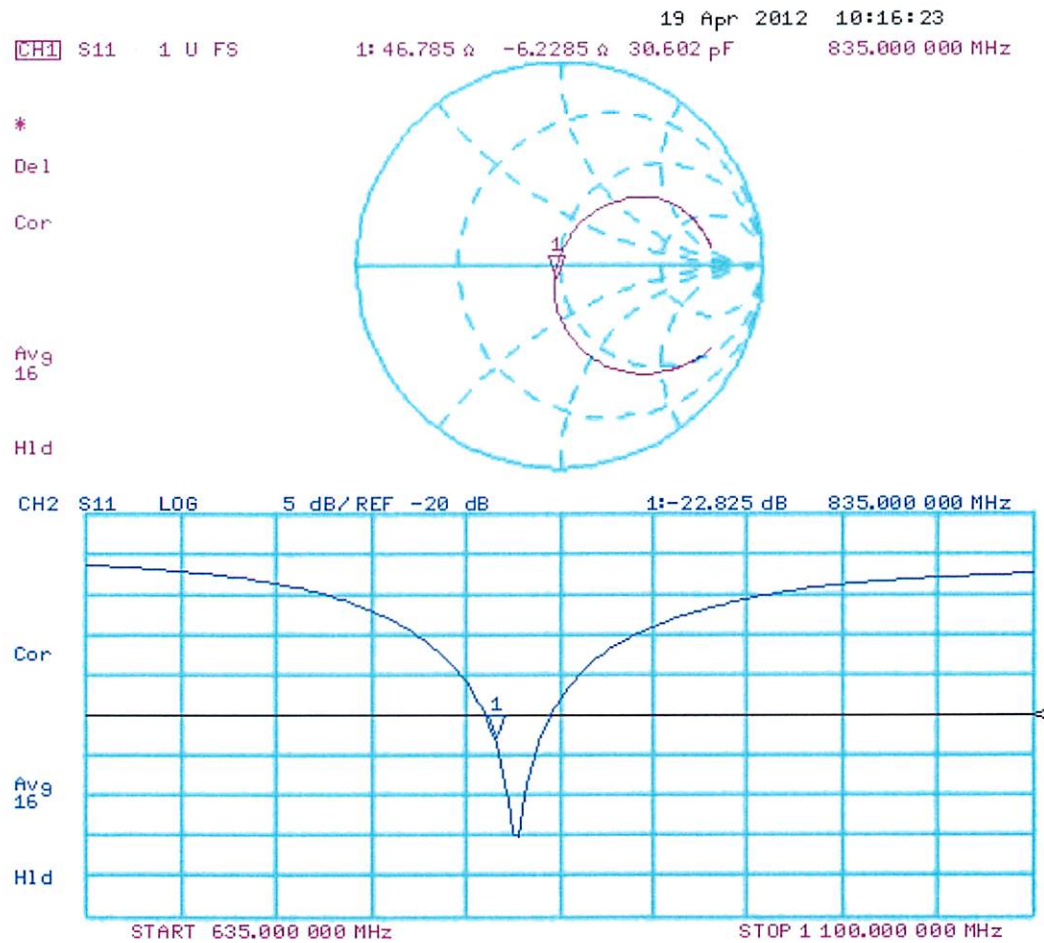

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## APPENDIX F - PROBE CALIBRATION

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 38 of 39 |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590\_Apr13**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **April 24, 2013**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Power sensor E4412A        | MY41498087      | 04-Apr-13 (No. 217-01733)         | Apr-14                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 04-Apr-13 (No. 217-01737)         | Apr-14                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-13 (No. 217-01735)         | Apr-14                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 04-Apr-13 (No. 217-01738)         | Apr-14                 |
| Reference Probe ES3DV2     | SN: 3013        | 28-Dec-12 (No. ES3-3013_Dec12)    | Dec-13                 |
| DAE4                       | SN: 660         | 31-Jan-13 (No. DAE4-660_Jan13)    | Jan-14                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-15 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-12) | In house check: Oct-13 |

|                                                                                                                 | Name            | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|-----------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Claudio Leubler | Laboratory Technician |           |
| Approved by:                                                                                                    | Katja Pokovic   | Technical Manager     |           |
| Issued: April 27, 2013                                                                                          |                 |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                 |                       |           |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1590

Manufactured: March 19, 2001  
Calibrated: April 24, 2013

**Calibrated for DASY/EASY Systems**  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Basic Calibration Parameters

|                                                    | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|----------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V/m})^2$ ) <sup>A</sup> | 1.73     | 1.85     | 1.61     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                              | 94.7     | 99.4     | 88.0     |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 186.7    | $\pm 2.7 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 151.0    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 171.2    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 450                  | 43.5                               | 0.87                            | 7.53    | 7.53    | 7.53    | 0.21  | 2.23       | ± 13.4 %    |
| 750                  | 41.9                               | 0.89                            | 7.24    | 7.24    | 7.24    | 0.25  | 3.00       | ± 12.0 %    |
| 835                  | 41.5                               | 0.90                            | 6.84    | 6.84    | 6.84    | 0.26  | 3.00       | ± 12.0 %    |
| 900                  | 41.5                               | 0.97                            | 6.68    | 6.68    | 6.68    | 0.28  | 3.00       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|-------|------------|-------------|
| 450                  | 56.7                               | 0.94                            | 7.98    | 7.98    | 7.98    | 0.13  | 2.14       | ± 13.4 %    |
| 750                  | 55.5                               | 0.96                            | 6.84    | 6.84    | 6.84    | 0.31  | 2.49       | ± 12.0 %    |
| 835                  | 55.2                               | 0.97                            | 6.67    | 6.67    | 6.67    | 0.29  | 2.67       | ± 12.0 %    |
| 900                  | 55.0                               | 1.05                            | 6.63    | 6.63    | 6.63    | 0.26  | 3.00       | ± 12.0 %    |

<sup>C</sup> Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

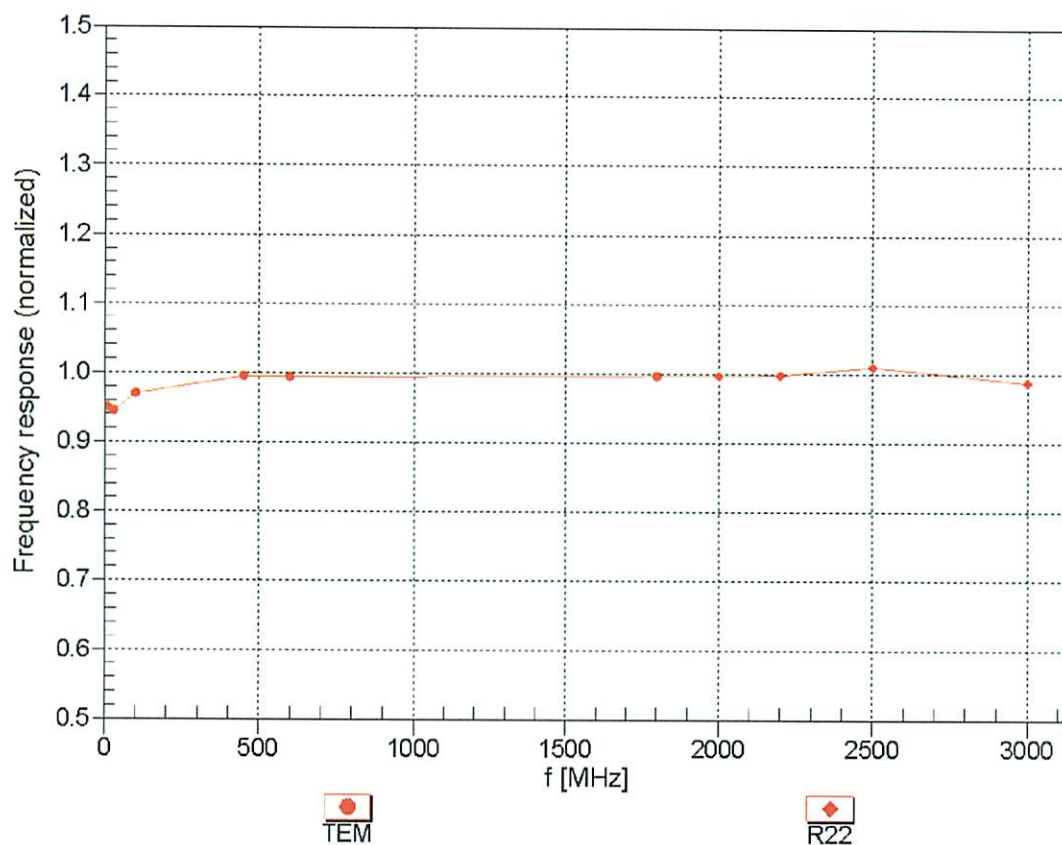



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz, TEM

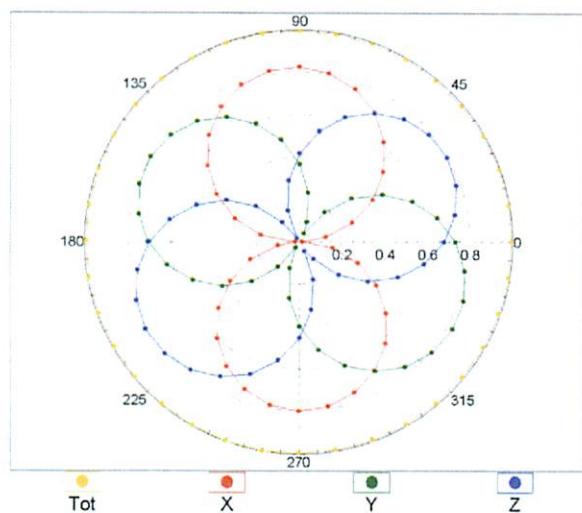


f=1800 MHz, R22

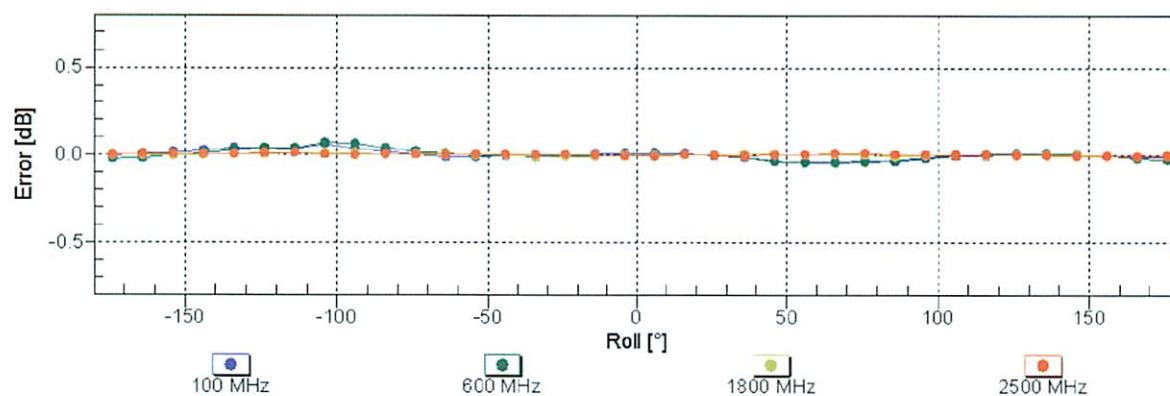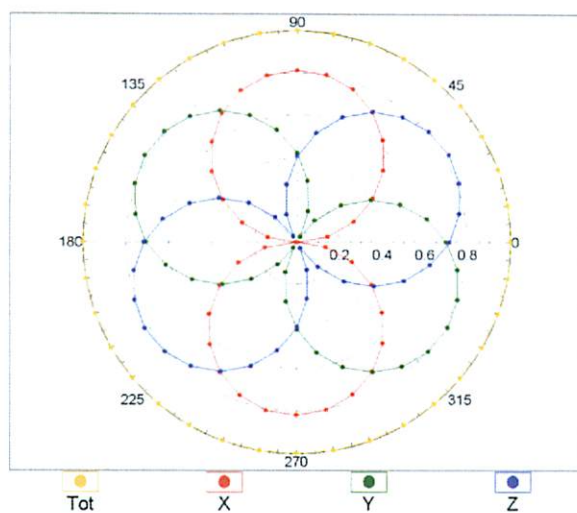


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f = 900 \text{ MHz}$ )

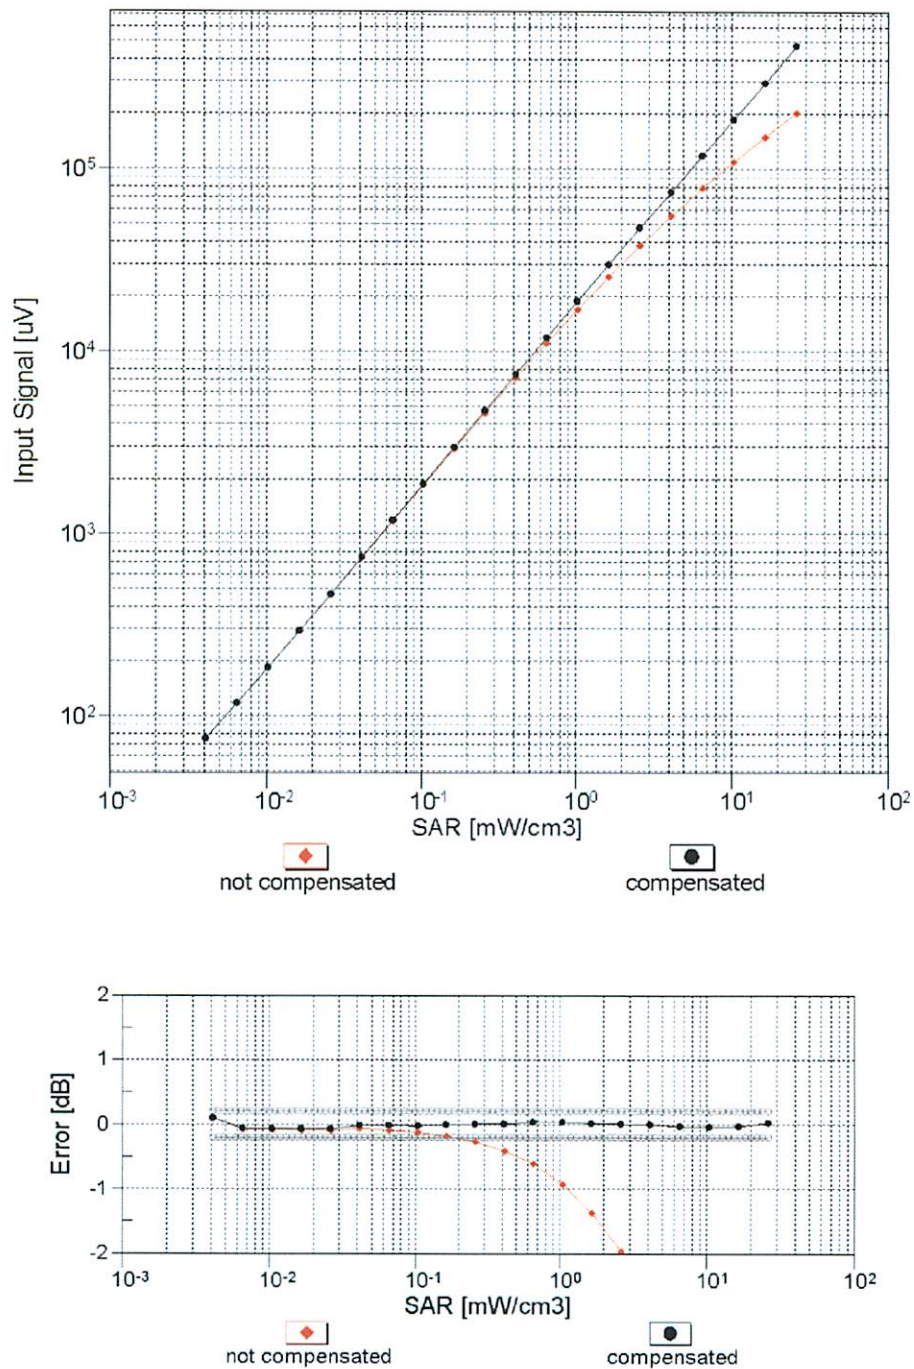



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

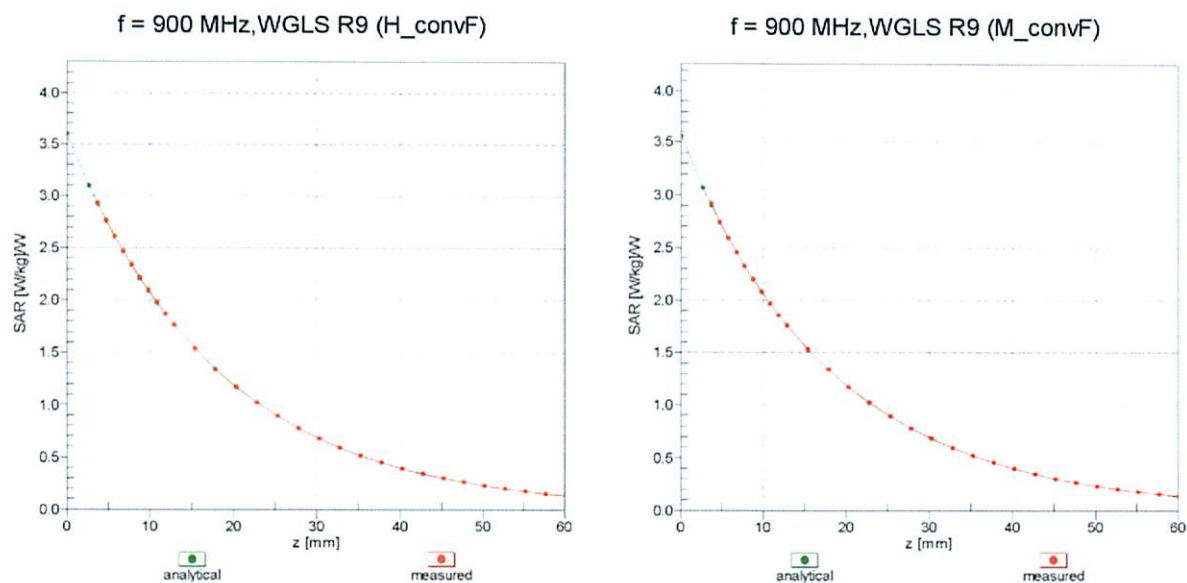

## Deviation from Isotropy in Liquid

Error ( $\phi$ ,  $\theta$ ),  $f = 900 \text{ MHz}$

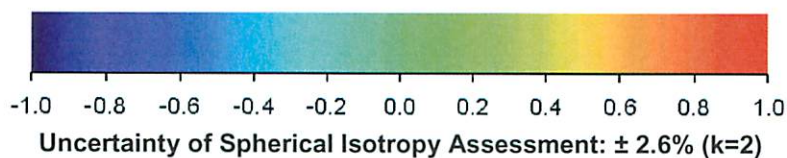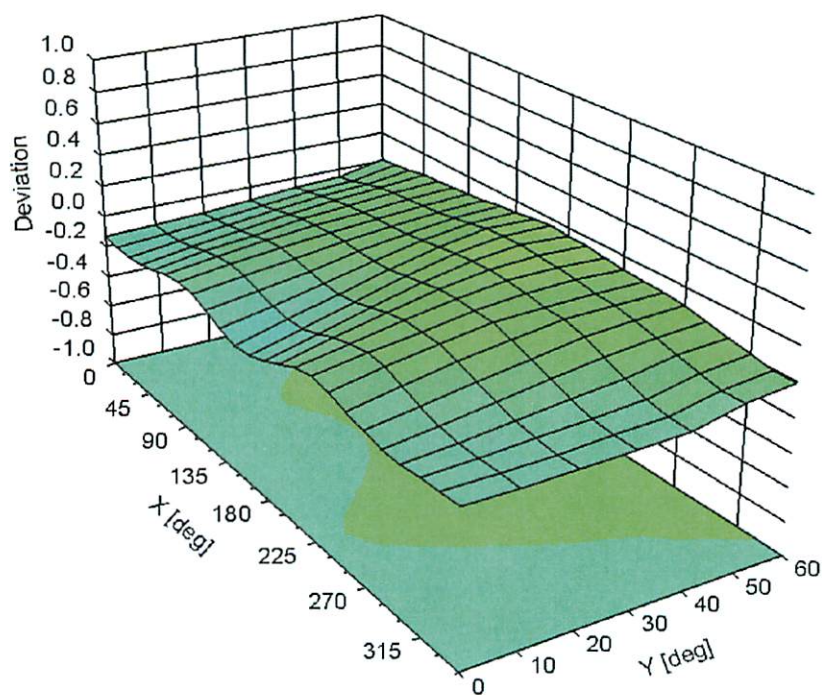

## DASY/EASY - Parameters of Probe: ET3DV6 - SN:1590

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 6          |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 6.8 mm     |
| Probe Tip to Sensor X Calibration Point       | 2.7 mm     |
| Probe Tip to Sensor Y Calibration Point       | 2.7 mm     |
| Probe Tip to Sensor Z Calibration Point       | 2.7 mm     |
| Recommended Measurement Distance from Surface | 4 mm       |

## **Additional Conversion Factors**

**for Dosimetric E-Field Probe**

Type:

**ET3DV6**

Serial Number:

**1590**

Place of Assessment:

**Zurich**

Date of Assessment:

**April 29, 2013**

Probe Calibration Date:

**April 24, 2013**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 450, 835 and 900 MHz.

Assessed by:



## Dosimetric E-Field Probe ET3DV6 SN:1590

Conversion factor ( $\pm$  standard deviation)

150  $\pm$  50 MHz      *ConvF*      9.31  $\pm$  10%

$\epsilon_r = 52.3 \pm 5\%$   
 $\sigma = 0.76 \pm 5\%$  mho/m  
 (head tissue)

300  $\pm$  50 MHz      *ConvF*      8.36  $\pm$  9%

$\epsilon_r = 45.3 \pm 5\%$   
 $\sigma = 0.87 \pm 5\%$  mho/m  
 (head tissue)

150  $\pm$  50 MHz      *ConvF*      8.65  $\pm$  10%

$\epsilon_r = 61.9 \pm 5\%$   
 $\sigma = 0.80 \pm 5\%$  mho/m  
 (body tissue)

300  $\pm$  50 MHz      *ConvF*      8.41  $\pm$  9%

$\epsilon_r = 58.2 \pm 5\%$   
 $\sigma = 0.92 \pm 5\%$  mho/m  
 (body tissue)

### Important Note:

**For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.**

**Please see also DASY Manual.**

|                                                                                  |                                                     |                                                           |                                                   |                                                                                    |
|----------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------|------------------------------------------------------------------------------------|
|  | <u>Date(s) of Evaluation</u><br>January 19-23, 2014 | <u>Test Report Serial No.</u><br>01282014UJW-1279         | <u>Test Report Revision No.</u><br>1.0            |  |
|                                                                                  | <u>Test Report Issue Date</u><br>28 Jan 2014        | <u>Description of Test(s)</u><br>Specific Absorption Rate | <u>RF Exposure Category</u><br>General Population |                                                                                    |

Test Lab Certificate No. 2470.01

## APPENDIX G - PHANTOM CERTIFICATE OF CONFORMITY

|                         |                                                                                                                      |                |                     |                      |                   |               |
|-------------------------|----------------------------------------------------------------------------------------------------------------------|----------------|---------------------|----------------------|-------------------|---------------|
| <b>Applicant:</b>       | <b>Nautic Devices Inc.</b>                                                                                           | <b>FCC ID:</b> | <b>UJW-4000</b>     | <b>IC ID:</b>        | <b>6695A-4000</b> |               |
| <b>DUT Type:</b>        | <b>Wireless Portable Phone</b>                                                                                       | <b>Models:</b> | <b>Yapalong4000</b> | <b>902 – 928 MHz</b> |                   |               |
| 2013 Celltech Labs Inc. | This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc. |                |                     |                      |                   | Page 39 of 39 |

# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Certificate of conformity / First Article Inspection

|                       |                                                                          |
|-----------------------|--------------------------------------------------------------------------|
| Item                  | SAM Twin Phantom V4.0                                                    |
| Type No               | QD 000 P40 BA                                                            |
| Series No             | TP-1002 and higher                                                       |
| Manufacturer / Origin | Untersee Composites<br>Hauptstr. 69<br>CH-8559 Fruthwilen<br>Switzerland |

### Tests

The series production process used allows the limitation to test of first articles.  
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test                 | Requirement                                                                             | Details                                                              | Units tested                 |
|----------------------|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------------|
| Shape                | Compliance with the geometry according to the CAD model.                                | IT'IS CAD File (*)                                                   | First article,<br>Samples    |
| Material thickness   | Compliant with the requirements according to the standards                              | 2mm +/- 0.2mm in specific areas                                      | First article,<br>Samples    |
| Material parameters  | Dielectric parameters for required frequencies                                          | 200 MHz – 3 GHz<br>Relative permittivity < 5<br>Loss tangent < 0.05. | Material sample<br>TP 104-5  |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards | Liquid type HSL 1800 and others according to the standard.           | Pre-series,<br>First article |

### Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9


(\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp



**Schmid & Partner  
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79