FCC Test Report

Report No.: RFBHJP-WTW-P21010398-1

FCC ID: UK7-DW13

Test Model: DW13F1, DW13F2, DW13M1 (refer to section 3.1 for more details)

Received Date: Jan. 15, 2021

Test Date: Feb. 02, 2021 ~ Feb. 25, 2021

Issued Date: Apr. 28, 2021

Applicant: Fossil Group, Inc.

Address: 901 S. Central Expressway, Richardson, Tx 75080, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / Designation Number: 788550 / TW0003

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record **4**

1 Certificate of Conformity **5**

2 Summary of Test Results **6**

2.1 Measurement Uncertainty 6
2.2 Modification Record 6

3 General Information **7**

3.1 General Description of EUT 7
3.2 Description of Test Modes 8
3.2.1 Test Mode Applicability and Tested Channel Detail 9
3.3 Duty Cycle of Test Signal 11
3.4 Description of Support Units 12
3.4.1 Configuration of System under Test 12
3.5 General Description of Applied Standards and References 13

4 Test Types and Results **14**

4.1 Radiated Emission and Bandedge Measurement 14
4.1.1 Limits of Radiated Emission and Bandedge Measurement 14
4.1.2 Test Instruments 15
4.1.3 Test Procedures 16
4.1.4 Deviation from Test Standard 16
4.1.5 Test Set Up 17
4.1.6 EUT Operating Conditions 18
4.1.7 Test Results 19
4.2 Conducted Emission Measurement 27
4.2.1 Limits of Conducted Emission Measurement 27
4.2.2 Test Instruments 27
4.2.3 Test Procedures 27
4.2.4 Deviation from Test Standard 28
4.2.5 Test Setup 28
4.2.6 EUT Operating Conditions 28
4.2.7 Test Results 29
4.3 6 dB Bandwidth Measurement 33
4.3.1 Limits of 6 dB Bandwidth Measurement 33
4.3.2 Test Setup 33
4.3.3 Test Instruments 33
4.3.4 Test Procedure 33
4.3.5 Deviation from Test Standard 33
4.3.6 EUT Operating Conditions 33
4.3.7 Test Results 34
4.4 Occupied Bandwidth Measurement 36
4.4.1 Test Setup 36
4.4.2 Test Instruments 36
4.4.3 Test Procedure 36
4.4.4 Deviation from Test Standard 36
4.4.5 EUT Operating Conditions 36
4.4.6 Test Results 37
4.5 Conducted Output Power Measurement 39
4.5.1 Limits of Conducted Output Power Measurement 39
4.5.2 Test Setup 39
4.5.3 Test Instruments 39
4.5.4 Test Procedures 39
4.5.5 Deviation from Test Standard 39
4.5.6 EUT Operating Conditions 39
4.5.7 Test Results 40

4.6 Power Spectral Density Measurement 41
4.6.1 Limits of Power Spectral Density Measurement 41
4.6.2 Test Setup 41
4.6.3 Test Instruments 41
4.6.4 Test Procedure 41
4.6.5 Deviation from Test Standard 41
4.6.6 EUT Operating Condition 41
4.6.7 Test Results 42
4.7 Conducted Out of Band Emission Measurement 44
4.7.1 Limits of Conducted Out of Band Emission Measurement 44
4.7.2 Test Setup 44
4.7.3 Test Instruments 44
4.7.4 Test Procedure 44
4.7.5 Deviation from Test Standard 44
4.7.6 EUT Operating Condition 44
4.7.7 Test Results 45

Annex A- Band Edge Measurement 49

5 Pictures of Test Arrangements 51

Appendix – Information of the Testing Laboratories 52

Release Control Record

Issue No.	Description	Date Issued
RFBHJP-WTW-P21010398-1	Original Release	Apr. 28, 2021

1 Certificate of Conformity

Product: Smart Watch

Test Model: DW13F1, DW13F2, DW13M1 (refer to section 3.1 for more details)

Sample Status: Identical Prototype

Applicant: Fossil Group, Inc.

Test Date: Feb. 02, 2021 ~ Feb. 25, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Vera Huang , **Date:** Apr. 28, 2021

Vera Huang / Specialist

Approved by : , **Date:** Apr. 28, 2021

Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	**Test Item**	**Result**	**Remarks**
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -16.24 dB at 0.61000 MHz.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -7.11 dB at 33.88 MHz.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Smart Watch
Test Model	DW13F1, DW13F2, DW13M1
Status of EUT	Identical Prototype
Power Supply Rating	5.0 Vdc (adapter or host equipment) 3.88 Vdc (Li-ion battery)
Modulation Type	GFSK
Transfer Rate	LE 4.0: 1 Mbps LE 5.0: 2 Mbps
Operating Frequency	2402 ~ 2480 MHz
Number of Channel	40
Output Power	LE 4.0: 4.375 mW LE 5.0: 4.426 mW
Antenna Type	Refer to Note as below
Antenna Connector	N/A
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:

1. All models are listed as below. Only model: DW13F1 as a representative for final test.

Model	Antenna Type	Antenna Gain (dBi) 2.4G / BT	Difference
DW13F1	PIFA	-5.25	All models are electrically identical, different antenna gain due to enclosure, and different model names are for marketing purpose.
DW13F2	PIFA	-6.82	
DW13M1	PIFA	-5.37	

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Charging Dock	Simula	CB407D-6040-202	Voltage Rating: 5V
Battery	Lishen	DAGP382427SA	3.88 Vdc, 300 mAh

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1 Test Mode Applicability and Tested Channel Detail

<LE 4.0>

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
A	√	-	-	√	EUT + Adapter
B	-	-	-	-	EUT + Notebook

Where **RE≥1G:** Radiated Emission above 1 GHz **RE<1G:** Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
Note: "-"means no effect.

Radiated Emission Test (Above 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A	0 to 39	0, 19, 39	GFSK	1

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
A	0 to 39	0, 19, 39	GFSK	1

<LE 5.0>

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT + Adapter
B	-	-	√	-	EUT + Notebook

Where **RE≥1G:** Radiated Emission above 1 GHz **RE<1G:** Radiated Emission below 1 GHz
PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
Note: "-"means no effect.

Radiated Emission Test (Above 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	2

Radiated Emission Test (Below 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	2

Power Line Conducted Emission Test:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	2

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	2

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Cookie Ku
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim Chen
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Tim Chen
APCM	25 deg. C, 60 % RH	3.88 Vdc	Ivan Tseng

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.

<LE 4.0>

Duty cycle = 0.382/0.632 = 0.604, Duty factor = 10 * log(1/0.604) = 2.19

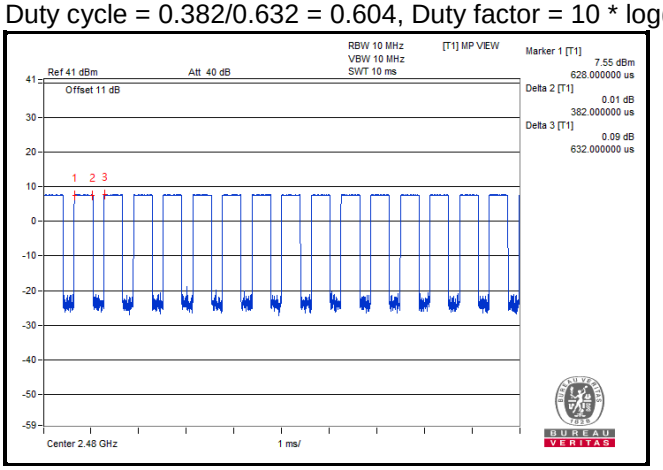

<LE 5.0>

Duty cycle = 0.195/0.634 = 0.308, Duty factor = 10 * log(1/0.308) = 5.12

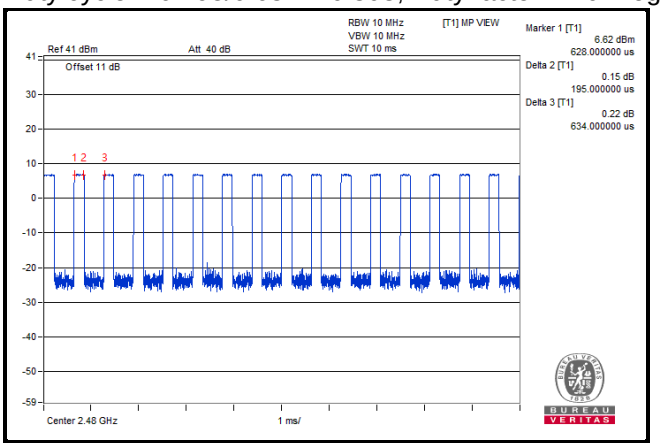

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	ASUS	AD827M	NA	NA	--
B	Notebook	DELL	Inspiron 14R	8LRKKW1	NA	--

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Charging Cable	1	0.85	N	0	Provided by client

3.4.1 Configuration of System under Test

Mode A

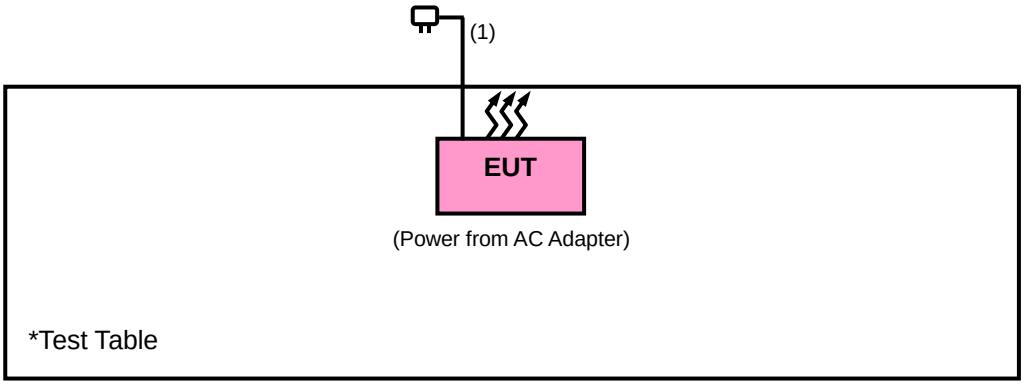

Mode B

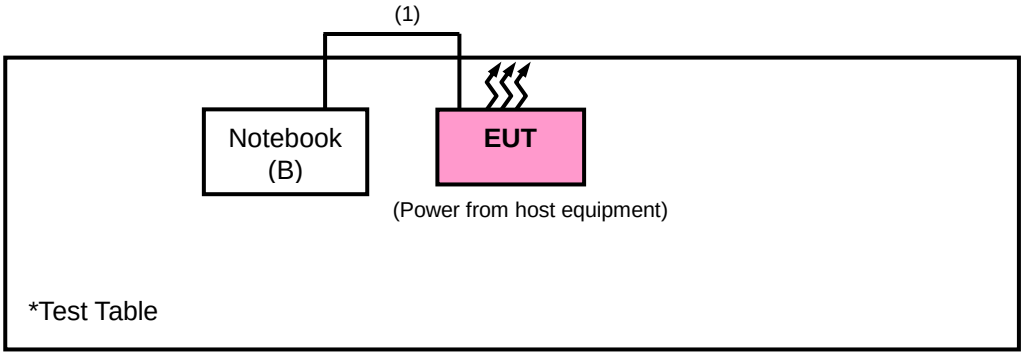

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart C (15.247)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 07, 2020	Dec. 06, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100980	Apr. 20, 2020	Apr. 19, 2021
			Apr. 14, 2021	Apr. 13, 2022
Signal Analyzer Keysight	N9010A	MY56070348	Sep. 16, 2020	Sep. 15, 2021
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 16, 2020	Apr. 15, 2021
			Apr. 12, 2021	Apr. 11, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 22, 2020	Nov. 21, 2021
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 06, 2020	Nov. 05, 2021
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
			Apr. 13, 2021	Apr. 12, 2022
Loop Antenna	EM-6879	269	Sep. 17, 2020	Sep. 16, 2021
Preamplifier EMCI	EMC001340	980201	Oct. 21, 2020	Oct. 20, 2021
Preamplifier EMCI	EMC 012645	980115	Oct. 07, 2020	Oct. 06, 2021
Preamplifier EMCI	EMC 330H	980112	Oct. 07, 2020	Oct. 06, 2021
Power Meter Anritsu	ML2495A	1012010	Sep. 01, 2020	Aug. 31, 2021
Power Sensor Anritsu	MA2411B	1315050	Sep. 01, 2020	Aug. 31, 2021
RF Coaxial Cable EMCI	EMC104-SM-SM-8000	171005	Oct. 07, 2020	Oct. 06, 2021
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1000(140807)	Oct. 07, 2020	Oct. 06, 2021
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 07, 2020	Oct. 06, 2021
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

4.1.3 Test Procedures

For Radiated Emission below 30 MHz

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

For Radiated Emission above 30 MHz

a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is ≥ 1/T (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz. (LE4.0: RBW = 1 MHz, VBW = 3 kHz ; LE5.0: RBW = 1 MHz, VBW = 5.6 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard

No deviation.

4.1.5 Test Set Up

<Radiated Emission below 30 MHz>

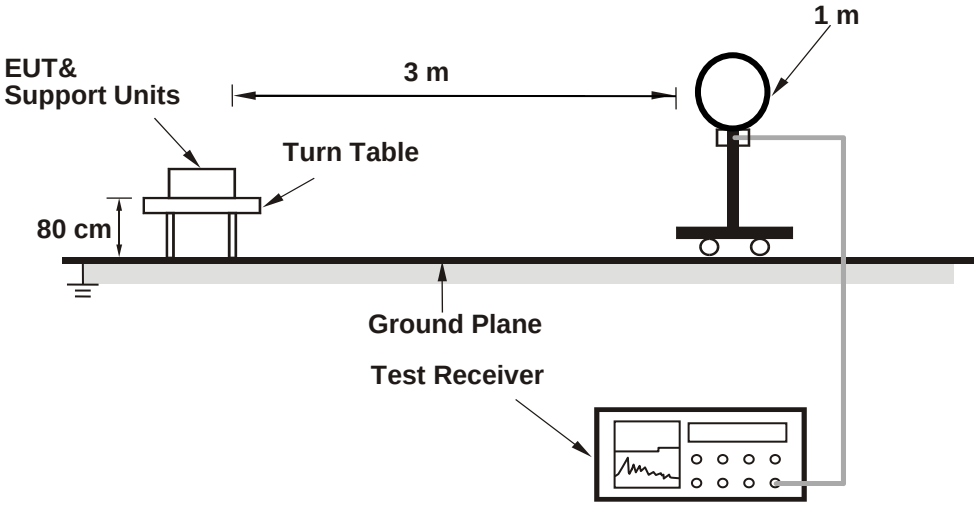

<Radiated Emission 30 MHz to 1 GHz>

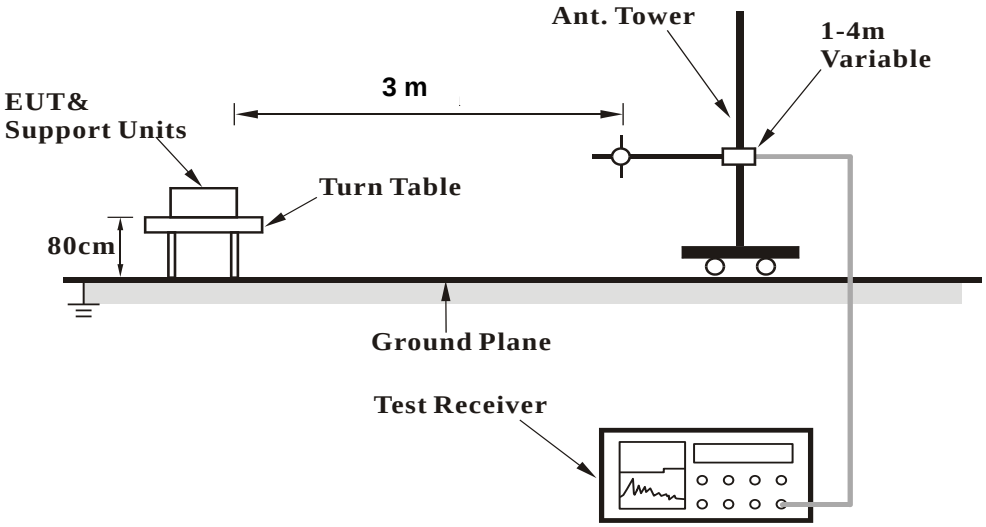

<Radiated Emission above 1 GHz>

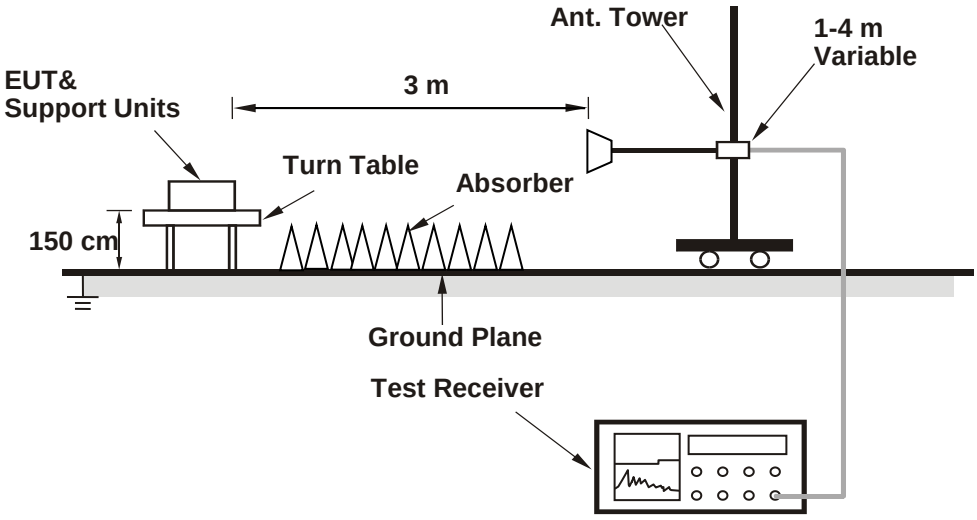

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

a. Placed the EUT on the testing table.

b. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data:

<LE 4.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 0	**Frequency Range**	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Cookie Ku

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	35.47	42.52	-7.05	54	-18.53	141	18	Average
2390	45.38	52.43	-7.05	74	-28.62	141	18	Peak
2402	97.21	104.26	-7.05	------	------	141	18	Average
2402	97.98	105.03	-7.05	------	------	141	18	Peak
4804	33.04	48.85	-15.81	54	-20.96	129	127	Average
4804	40.22	56.03	-15.81	74	-33.78	129	127	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	35.54	42.59	-7.05	54	-18.46	289	343	Average
2390	45.29	52.34	-7.05	74	-28.71	289	343	Peak
2402	91.4	98.45	-7.05	------	------	289	343	Average
2402	92.14	99.19	-7.05	------	------	289	343	Peak
4804	32.37	48.18	-15.81	54	-21.63	157	227	Average
4804	39.51	55.32	-15.81	74	-34.49	157	227	Peak

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. 2402 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 19	**Frequency Range**	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Cookie Ku

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	35.6	42.65	-7.05	54	-18.4	158	18	Average
2390	45.8	52.85	-7.05	74	-28.2	158	18	Peak
2440	96.85	103.85	-7	------	------	158	18	Average
2440	97.52	104.52	-7	------	------	158	18	Peak
2483.5	35.42	42.28	-6.86	54	-18.58	158	18	Average
2483.5	44.97	51.83	-6.86	74	-29.03	158	18	Peak
4880	32.13	48.07	-15.94	54	-21.87	195	240	Average
4880	39.27	55.21	-15.94	74	-34.73	195	240	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	35.36	42.41	-7.05	54	-18.64	285	345	Average
2390	45.58	52.63	-7.05	74	-28.42	285	345	Peak
2440	90.15	97.15	-7	------	------	285	345	Average
2440	90.52	97.52	-7	------	------	285	345	Peak
2483.5	35.34	42.2	-6.86	54	-18.66	285	345	Average
2483.5	44.54	51.4	-6.86	74	-29.46	285	345	Peak
4880	30.98	46.92	-15.94	54	-23.02	279	154	Average
4880	38.13	54.07	-15.94	74	-35.87	279	154	Peak

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. 2440 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	**Frequency Range**	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Cookie Ku

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2480	97.44	104.3	-6.86	------	------	133	17	Average
2480	98.15	105.01	-6.86	------	------	133	17	Peak
2483.5	36.24	43.1	-6.86	54	-17.76	133	17	Average
2483.5	48.57	55.43	-6.86	74	-25.43	133	17	Peak
4960	32.28	47.98	-15.7	54	-21.72	299	182	Average
4960	39.41	55.11	-15.7	74	-34.59	299	182	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2480	91.35	98.21	-6.86	------	------	308	318	Average
2480	91.76	98.62	-6.86	------	------	308	318	Peak
2483.5	35.66	42.52	-6.86	54	-18.34	308	318	Average
2483.5	45.32	52.18	-6.86	74	-28.68	308	318	Peak
4960	31.95	47.65	-15.7	54	-22.05	212	306	Average
4960	39.09	54.79	-15.7	74	-34.91	212	306	Peak

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. 2480 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

<LE 5.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 0	**Frequency Range**	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Cookie Ku

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	36.32	43.37	-7.05	54	-17.68	140	18	Average
2390	45.95	53	-7.05	74	-28.05	140	18	Peak
2402	96.16	103.21	-7.05	------	------	140	18	Average
2402	98.12	105.17	-7.05	------	------	140	18	Peak
4804	32.81	48.62	-15.81	54	-21.19	284	49	Average
4804	40.03	55.84	-15.81	74	-33.97	284	49	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	36.13	43.18	-7.05	54	-17.87	290	17	Average
2390	45.1	52.15	-7.05	74	-28.9	290	17	Peak
2402	89.29	96.34	-7.05	------	------	290	17	Average
2402	91.17	98.22	-7.05	------	------	290	17	Peak
4804	32.19	48	-15.81	54	-21.81	194	311	Average
4804	39.26	55.07	-15.81	74	-34.74	194	311	Peak

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. 2402 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 19	**Frequency Range**	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Cookie Ku

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	36.15	43.2	-7.05	54	-17.85	158	18	Average
2390	45.44	52.49	-7.05	74	-28.56	158	18	Peak
2440	95.94	102.94	-7	------	------	158	18	Average
2440	97.67	104.67	-7	------	------	158	18	Peak
2483.5	36.13	42.99	-6.86	54	-17.87	158	18	Average
2483.5	44.91	51.77	-6.86	74	-29.09	158	18	Peak
4880	32.37	48.31	-15.94	54	-21.63	234	177	Average
4880	39.55	55.49	-15.94	74	-34.45	234	177	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2390	36.32	43.37	-7.05	54	-17.68	320	295	Average
2390	44.95	52	-7.05	74	-29.05	320	295	Peak
2440	90.01	97.01	-7	------	------	320	295	Average
2440	91.78	98.78	-7	------	------	320	295	Peak
2483.5	36.02	42.88	-6.86	54	-17.98	320	295	Average
2483.5	44.6	51.46	-6.86	74	-29.4	320	295	Peak
4880	31.29	47.23	-15.94	54	-22.71	145	328	Average
4880	38.41	54.35	-15.94	74	-35.59	145	328	Peak

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. 2440 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	**Frequency Range**	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Cookie Ku

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2480	94.71	101.57	-6.86	------	------	103	338	Average
2480	96.47	103.33	-6.86	------	------	103	338	Peak
2483.5	36.81	43.67	-6.86	54	-17.19	103	338	Average
2483.5	50.06	56.92	-6.86	74	-23.94	103	338	Peak
4960	33.41	49.11	-15.7	54	-20.59	149	256	Average
4960	40.6	56.3	-15.7	74	-33.4	149	256	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
2480	88.82	95.68	-6.86	------	------	309	294	Average
2480	90.61	97.47	-6.86	------	------	309	294	Peak
2483.5	36.21	43.07	-6.86	54	-17.79	309	294	Average
2483.5	45.7	52.56	-6.86	74	-28.3	309	294	Peak
4960	33.89	49.59	-15.7	54	-20.11	283	74	Average
4960	41.07	56.77	-15.7	74	-32.93	283	74	Peak

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. 2480 MHz: Fundamental frequency.
3. The emission levels of other frequencies were very low against the limit.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:

<LE 5.0>

EUT Test Condition		Measurement Detail	
Channel	Channel 39	**Frequency Range**	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	**Detector Function**	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	**Tested By**	Tim Chen

Horizontal

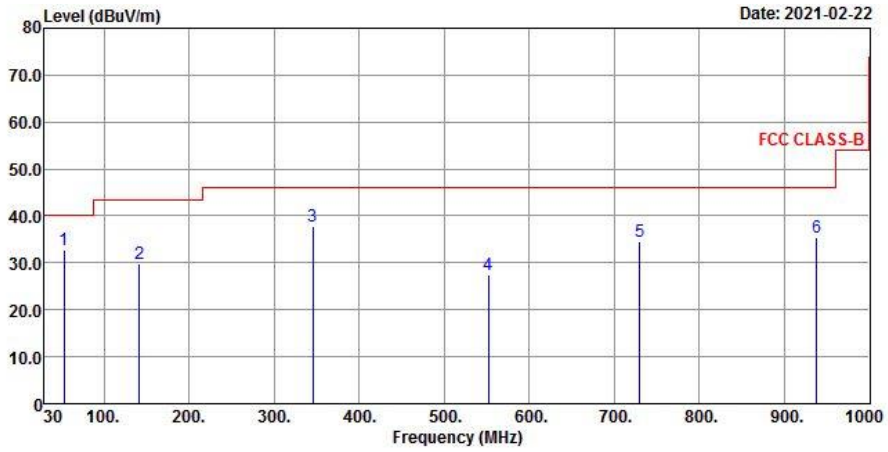

Vertical

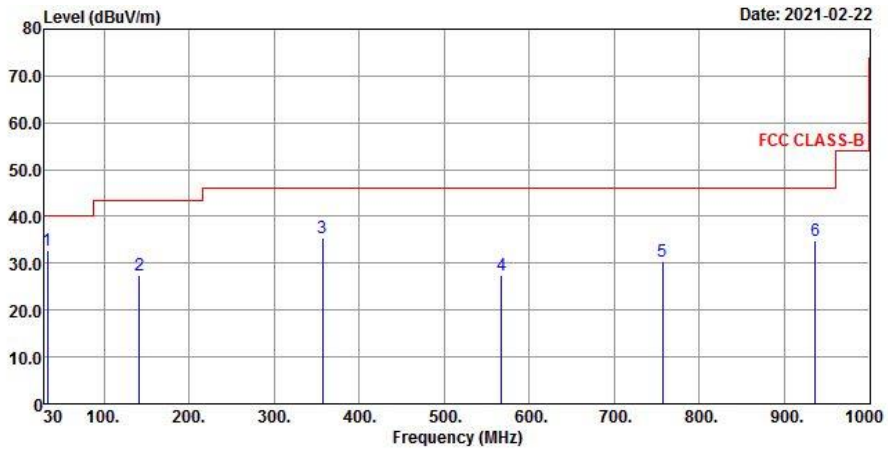

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
53.28	32.68	45.25	-12.57	40	-7.32	133	159	QP
141.55	29.93	42.53	-12.6	43.5	-13.57	221	104	QP
345.25	37.86	48.06	-10.2	46	-8.14	178	320	QP
551.86	27.54	31.85	-4.31	46	-18.46	174	165	QP
730.34	34.59	35.05	-0.46	46	-11.41	158	264	QP
937.92	35.28	32.24	3.04	46	-10.72	324	119	QP
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	**Emission Level (dBuV/m)**	**Read Level (dBuV)**	**Factor (dB/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (cm)**	**Table Angle (Degree)**	**Remark**
33.88	**32.89**	**45.96**	**-13.07**	**40**	**-7.11**	**100**	**230**	**QP**
141.55	27.54	40.14	-12.6	43.5	-15.96	274	84	QP
356.89	35.45	45.26	-9.81	46	-10.55	298	161	QP
567.38	27.36	31.18	-3.82	46	-18.64	102	325	QP
756.53	30.53	30.29	0.24	46	-15.47	235	187	QP
935.98	34.77	31.77	3	46	-11.23	155	199	QP

Remarks:

1. Emission Level = Read Level + Factor
   Margin value = Emission level – Limit value
2. The emission levels of other frequencies were very low against the limit.

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 04, 2020	Dec. 03, 2021
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 16, 2021	Jan. 15, 2022
V-LISN/AMN SCHWARZBECK (EUT)	NNLK 8121	8121-731	Apr. 20, 2020	Apr. 19, 2021
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 28, 2020	Aug. 27, 2021
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-12040.
4. Test Date: 2021/02/20

4.2.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz - 30 MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

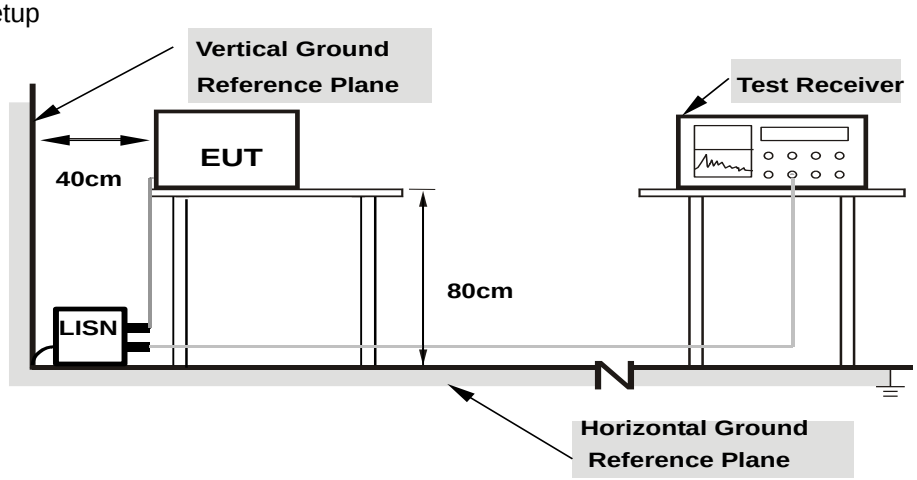

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.2.6 EUT Operating Conditions

a. Placed the EUT on the testing table.
b. Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23℃, 67%RH
Tested by	Tim Chen	Test Date	2021/2/20
Test Mode	Mode A		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	10.09	27.98	6.46	38.07	16.55	65.36	55.36	-27.29	-38.81
2	0.46200	10.20	15.47	4.20	25.67	14.40	56.66	46.66	-30.99	-32.26
3	1.37800	10.33	4.15	0.50	14.48	10.83	56.00	46.00	-41.52	-35.17
4	3.13400	10.43	6.79	0.05	17.22	10.48	56.00	46.00	-38.78	-35.52
5	6.21000	10.61	9.17	0.75	19.78	11.36	60.00	50.00	-40.22	-38.64
6	11.51400	10.90	13.05	1.97	23.95	12.87	60.00	50.00	-36.05	-37.13

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

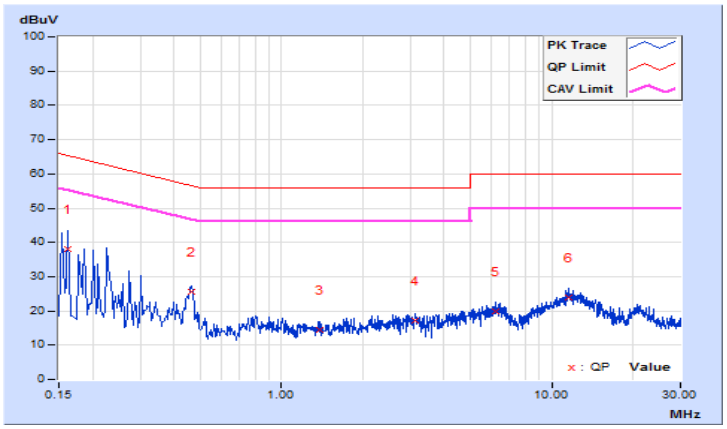

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23℃, 67%RH
Tested by	Tim Chen	Test Date	2021/2/20
Test Mode	Mode A		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16190	10.08	27.96	5.76	38.04	15.84	65.37	55.37	-27.33	-39.53
2	0.30200	10.15	11.69	0.12	21.84	10.27	60.19	50.19	-38.35	-39.92
3	1.16200	10.30	9.31	0.41	19.61	10.71	56.00	46.00	-36.39	-35.29
4	3.01800	10.40	10.33	4.23	20.73	14.63	56.00	46.00	-35.27	-31.37
5	6.75000	10.56	15.87	3.34	26.43	13.90	60.00	50.00	-33.57	-36.10
6	17.26600	10.98	10.11	1.36	21.09	12.34	60.00	50.00	-38.91	-37.66

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

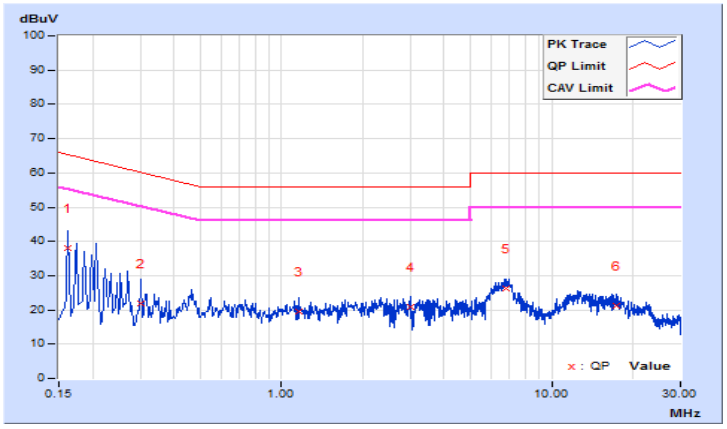

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23℃, 67%RH
Tested by	Tim Chen	Test Date	2021/2/20
Test Mode	Mode B		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16535	10.05	31.43	7.02	41.48	17.07	65.19	55.19	-23.71	-38.12
2	0.33400	10.08	18.64	1.76	28.72	11.84	59.35	49.35	-30.63	-37.51
3	**0.61000**	**10.11**	**29.65**	**11.29**	**39.76**	**21.40**	**56.00**	**46.00**	**-16.24**	**-24.60**
4	2.30600	10.21	24.07	12.65	34.28	22.86	56.00	46.00	-21.72	-23.14
5	7.77800	10.50	18.17	8.01	28.67	18.51	60.00	50.00	-31.33	-31.49
6	19.15000	11.03	16.56	6.91	27.59	17.94	60.00	50.00	-32.41	-32.06

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

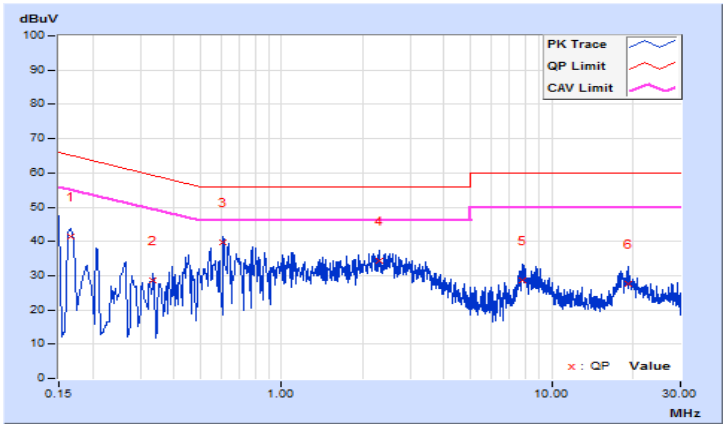

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	23℃, 67%RH
Tested by	Tim Chen	Test Date	2021/2/20
Test Mode	Mode B		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15400	10.04	34.70	9.82	44.74	19.86	65.78	55.78	-21.04	-35.92
2	0.27000	10.05	19.35	7.08	29.40	17.13	61.12	51.12	-31.72	-33.99
3	0.62600	10.11	27.61	13.36	37.72	23.47	56.00	46.00	-18.28	-22.53
4	2.39400	10.20	21.84	10.36	32.04	20.56	56.00	46.00	-23.96	-25.44
5	9.40600	10.47	19.20	8.88	29.67	19.35	60.00	50.00	-30.33	-30.65
6	18.73800	10.77	22.60	10.07	33.37	20.84	60.00	50.00	-26.63	-29.16

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

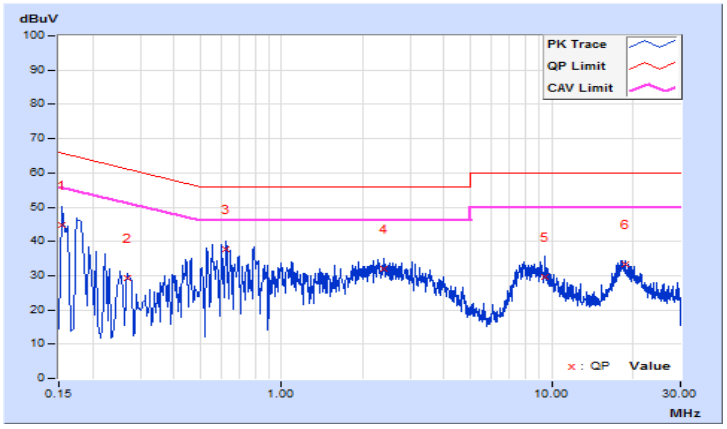

4.3 6 dB Bandwidth Measurement

4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

a. Set resolution bandwidth (RBW) = 100 kHz
b. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
c. Trace mode = max hold.
d. Sweep = auto couple.
e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

<LE 4.0>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.67	0.5	Pass
19	2440	0.67	0.5	Pass
39	2480	0.67	0.5	Pass

Spectrum Plot of Worst Value

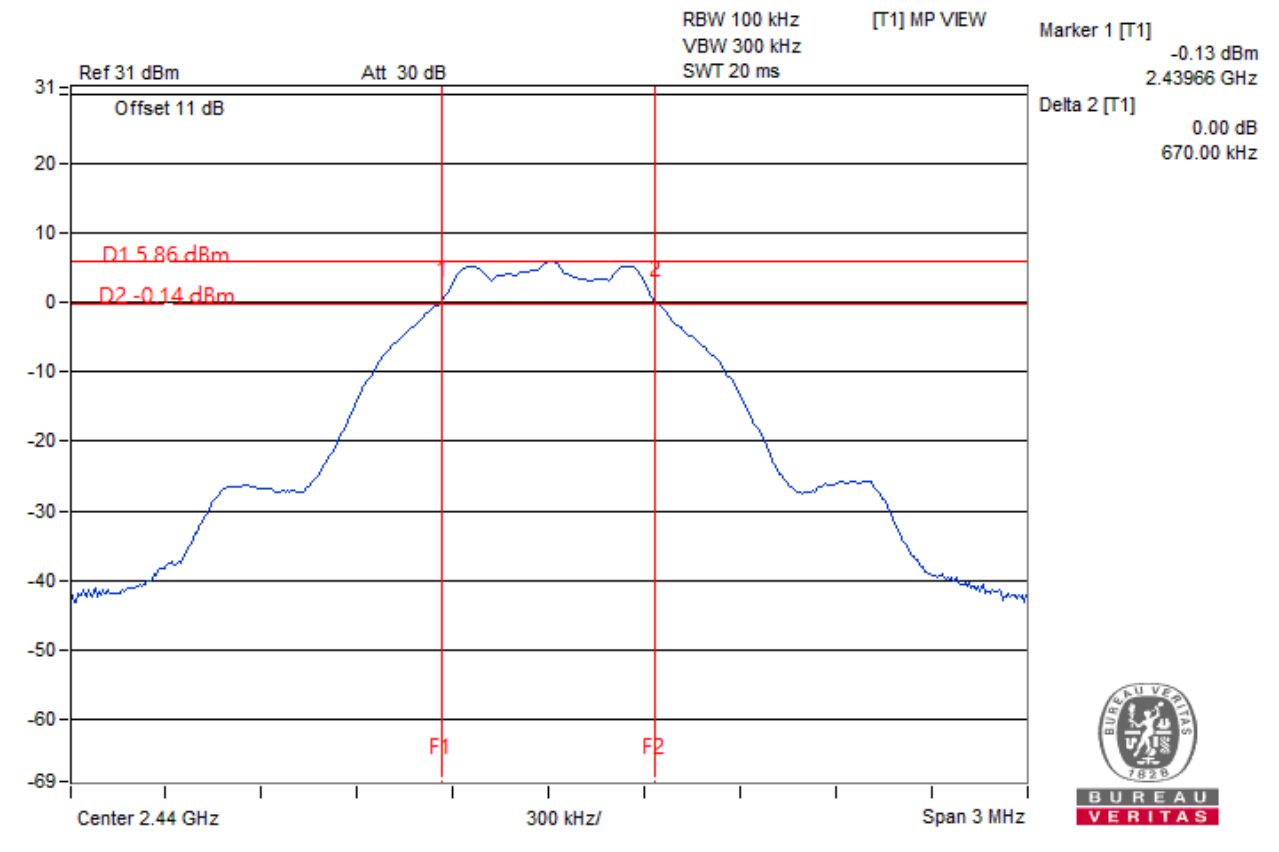

<LE 5.0>

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.15	0.5	Pass
19	2440	1.17	0.5	Pass
39	2480	1.15	0.5	Pass

Spectrum Plot of Worst Value

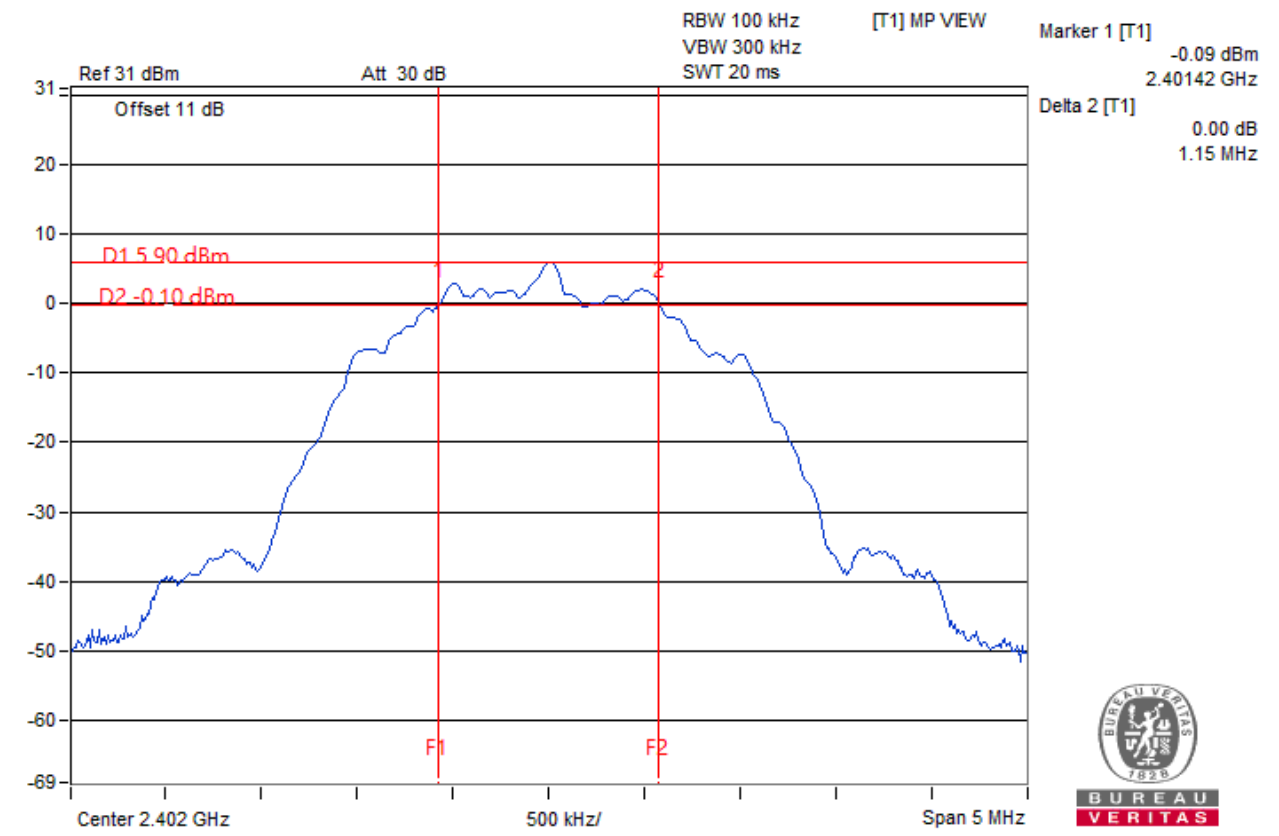

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

<LE 4.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.03	Pass
19	2440	1.03	Pass
39	2480	1.03	Pass

Spectrum Plot of Worst Value

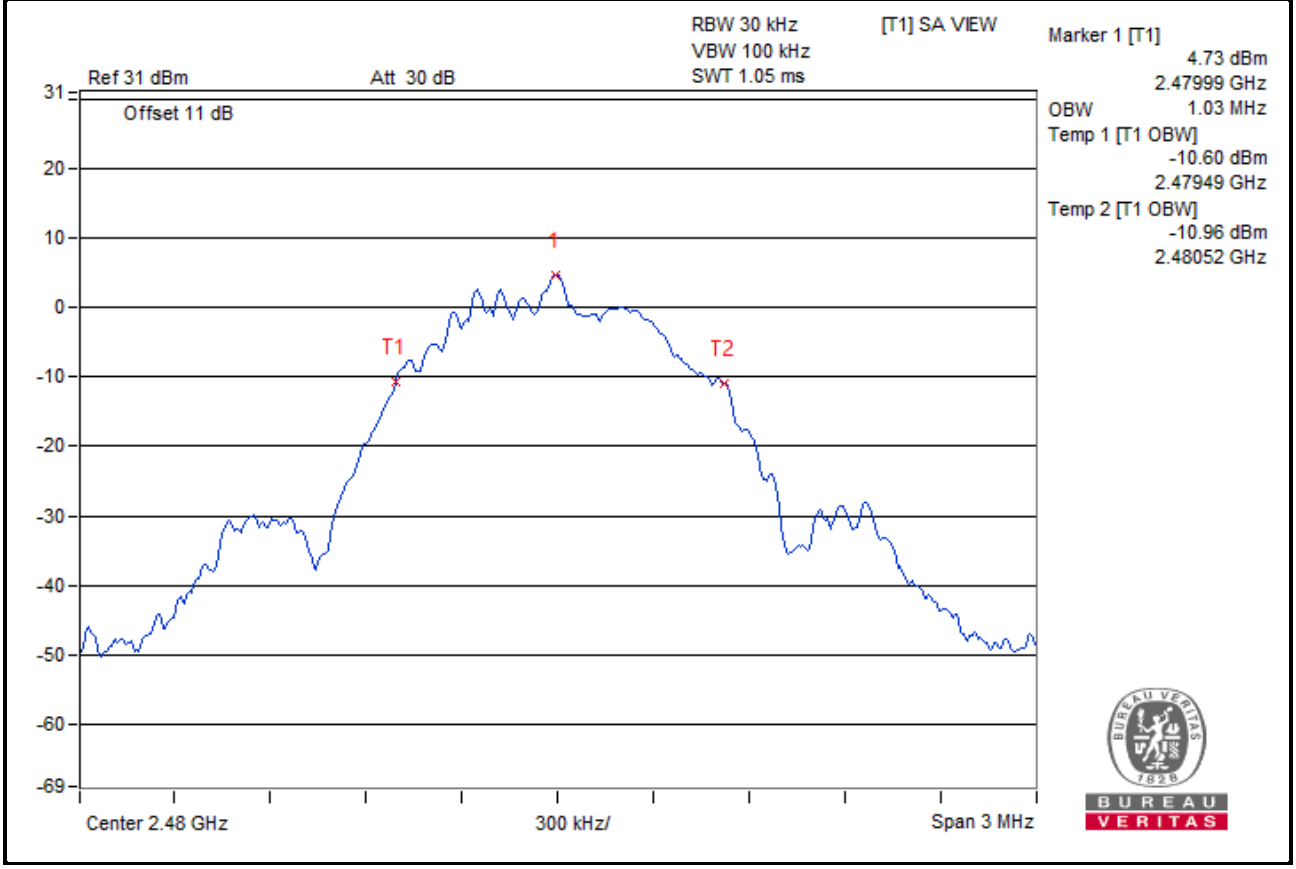

<LE 5.0>

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	2.03	Pass
19	2440	2.03	Pass
39	2480	2.03	Pass

Spectrum Plot of Worst Value

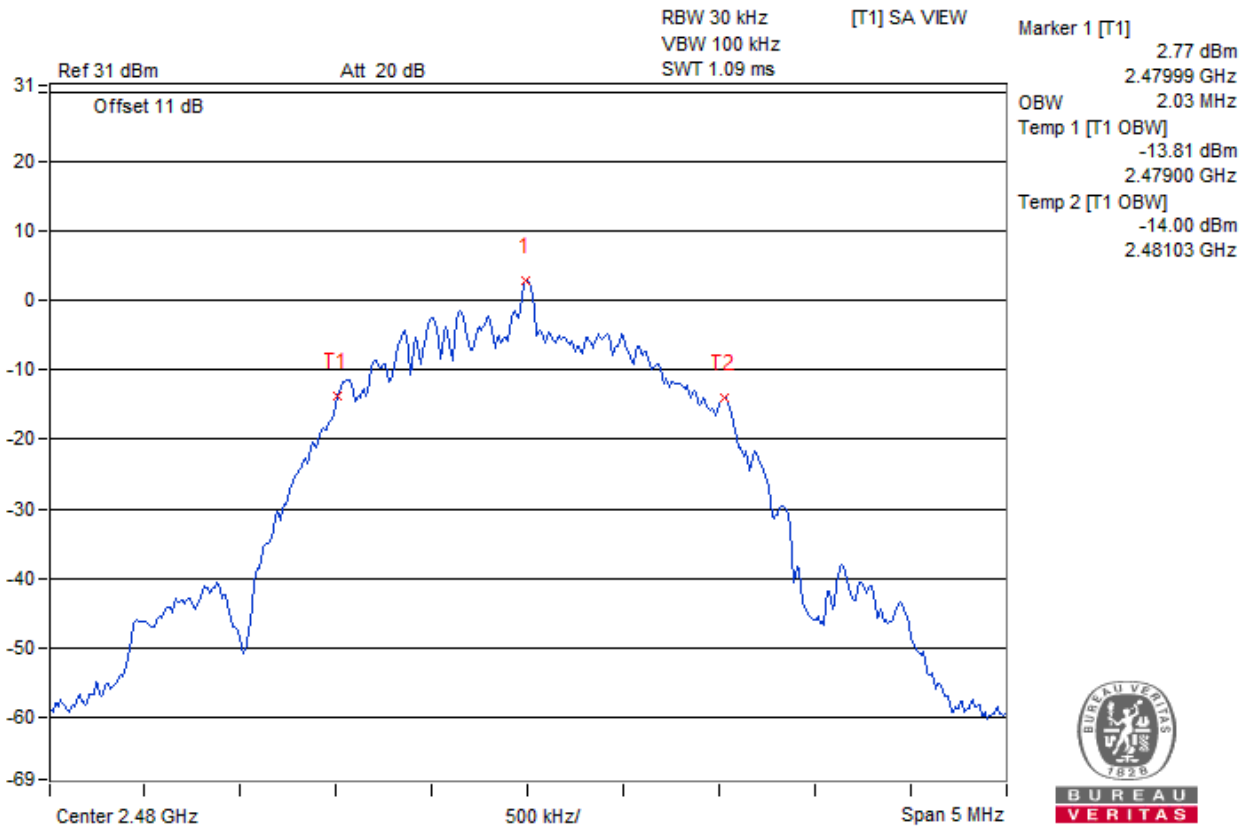

4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

4.5.2 Test Setup

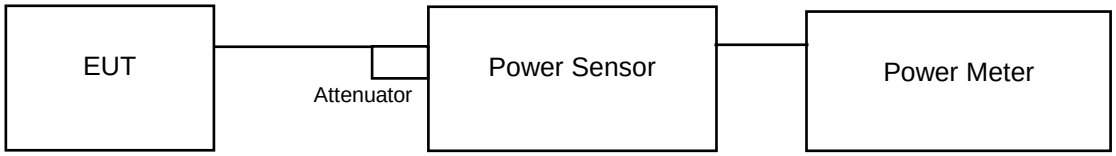

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

<LE 4.0>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	**4.375**	6.41	4.256	6.29	1000	Pass
19	2440	2.838	4.53	2.754	4.40	1000	Pass
39	2480	4.064	6.09	3.963	5.98	1000	Pass

<LE 5.0>

Channel	Freq. (MHz)	Peak Power		Average Power		Power Limit (mW)	Pass / Fail
		(mW)	(dBm)	(mW)	(dBm)		
0	2402	**4.426**	6.46	4.074	6.10	1000	Pass
19	2440	3.048	4.84	2.793	4.46	1000	Pass
39	2480	4.345	6.38	4.018	6.04	1000	Pass

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

a. Set analyzer center frequency to DTS channel center frequency.
b. Set the span to 1.5 times the DTS bandwidth.
c. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
d. Set the VBW ≥ 3 × RBW.
e. Detector = peak.
f. Sweep time = auto couple.
g. Trace mode = max hold.
h. Allow trace to fully stabilize.
i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.6.7 Test Results

<LE 4.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-7.63	8	Pass
19	2440	-8.86	8	Pass
39	2480	-7.32	8	Pass

Spectrum Plot of Worst Value

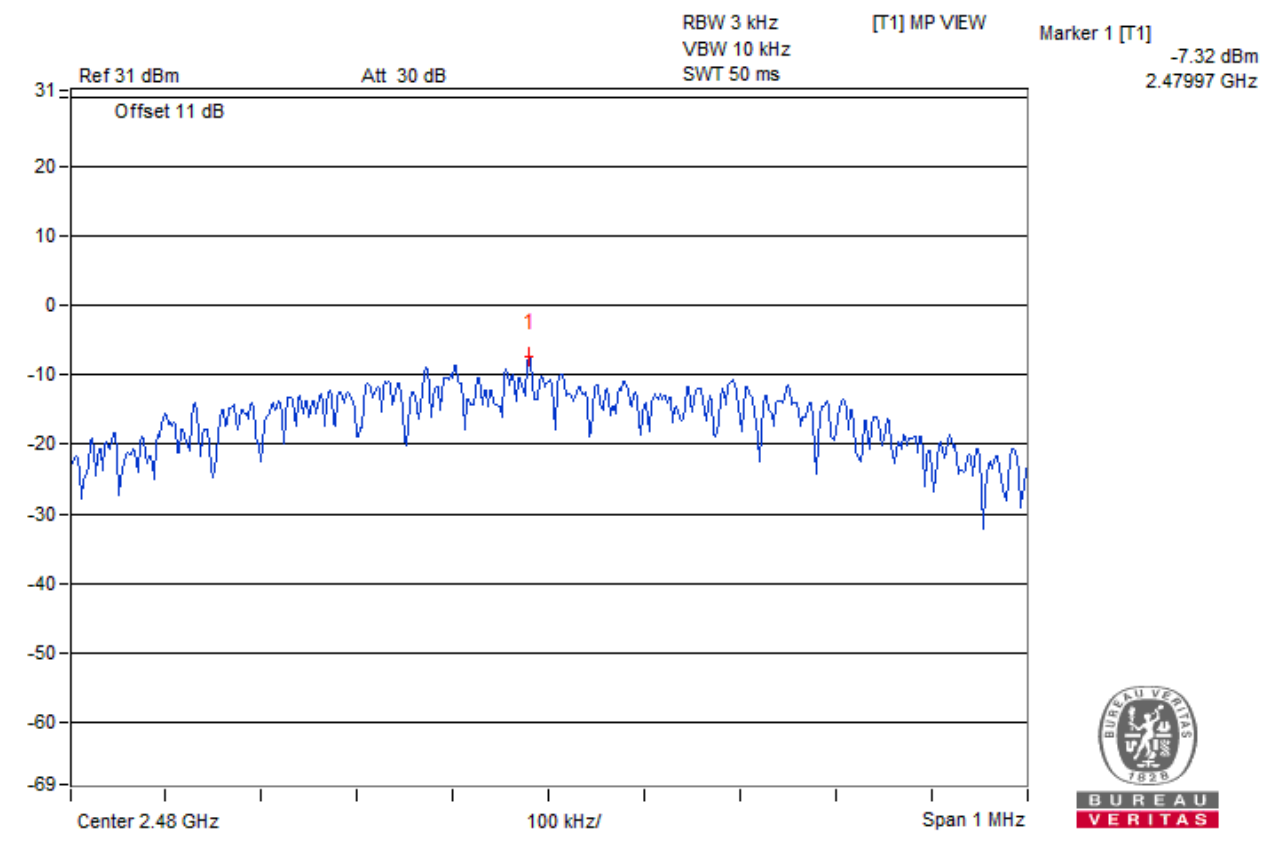

<LE 5.0>

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	2402	-12.50	8	Pass
19	2440	-13.69	8	Pass
39	2480	-12.03	8	Pass

Spectrum Plot of Worst Value

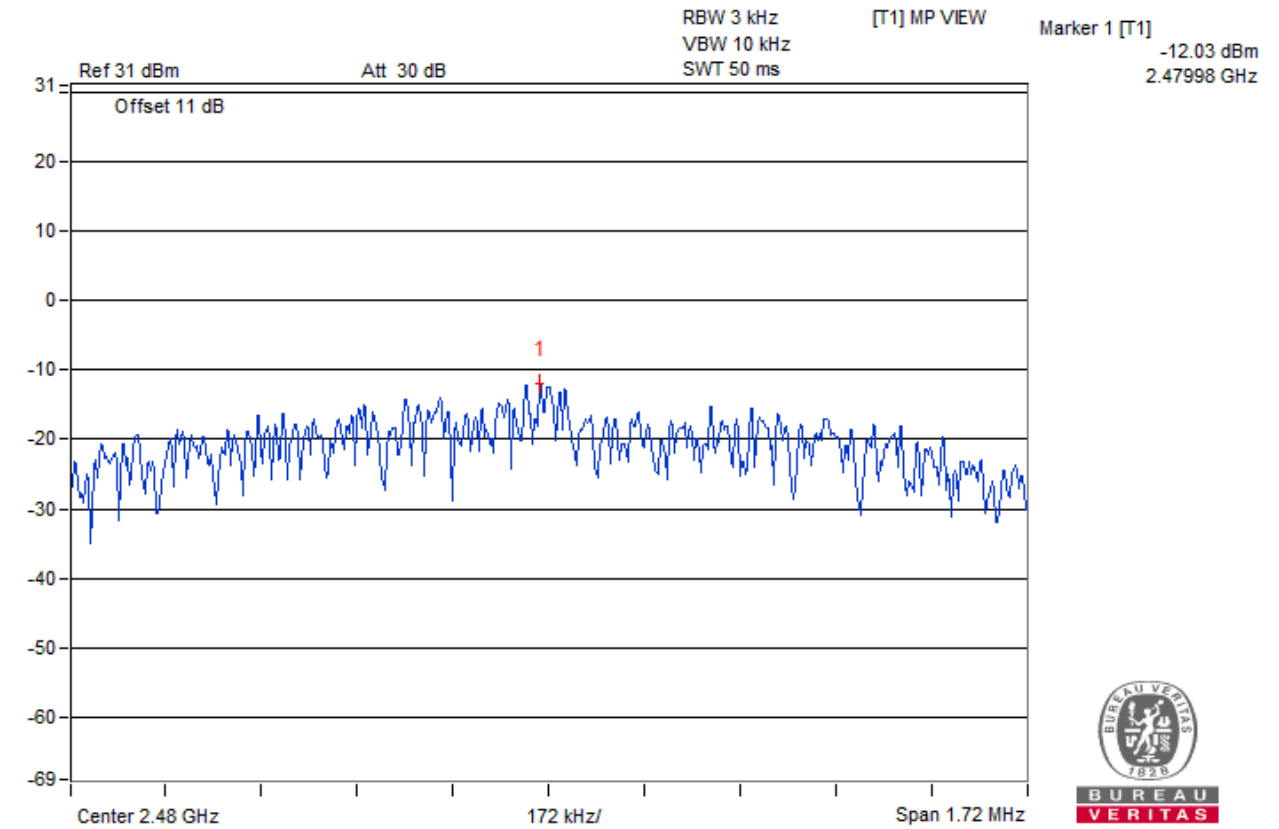

4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below –20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW ≥ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW ≥ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

<LE 4.0>

Ch 0

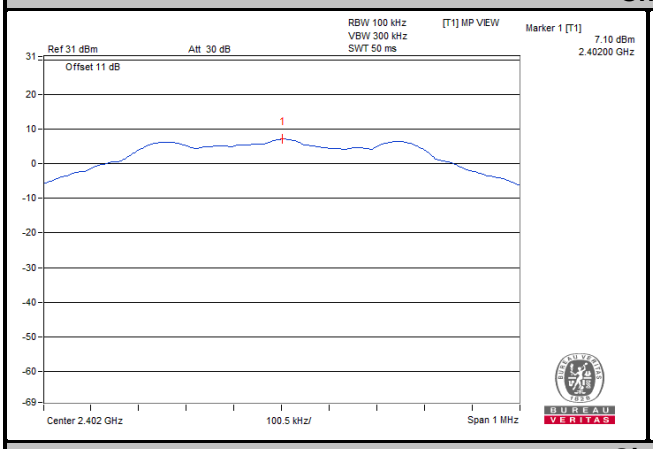

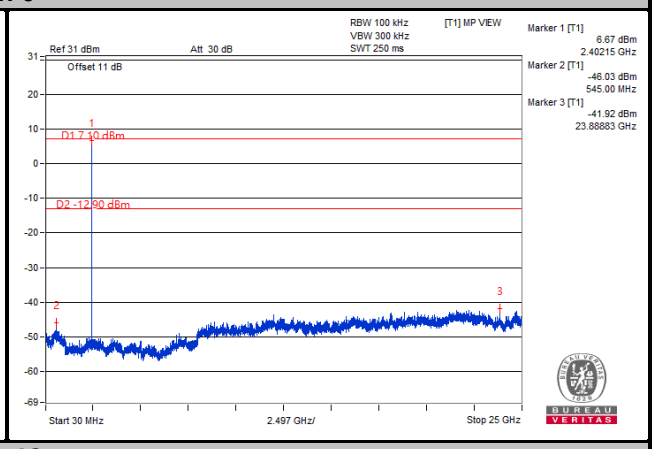

Ch 19

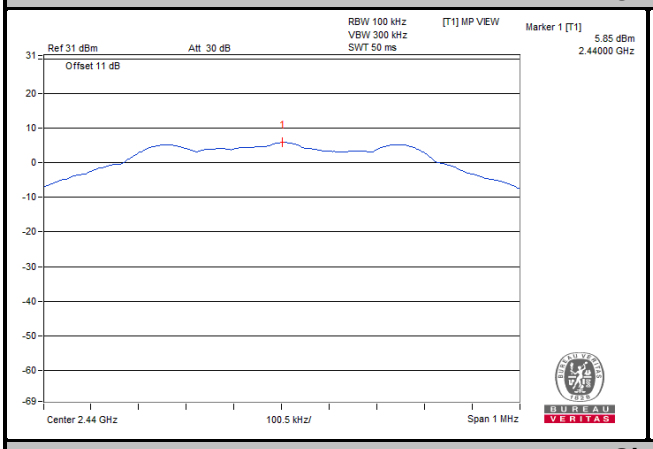

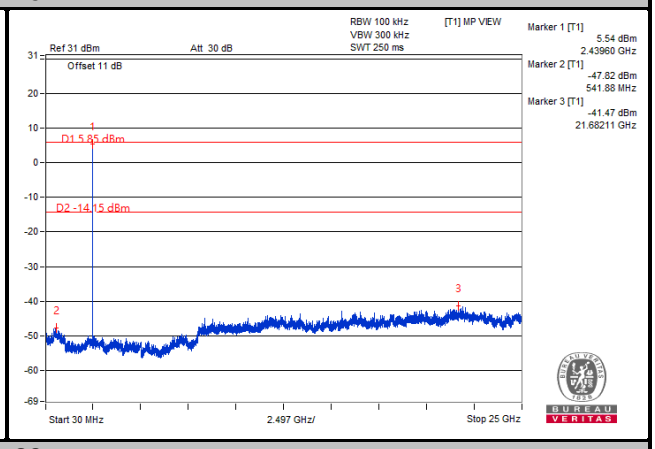

Ch 39

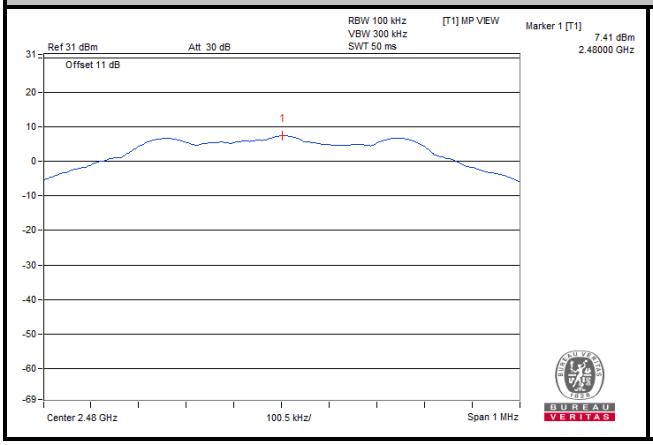

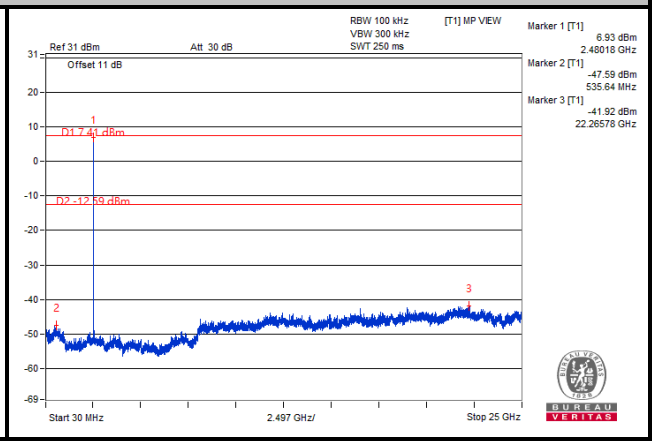

Ch 0 Band Edge	Ch 39 Band Edge
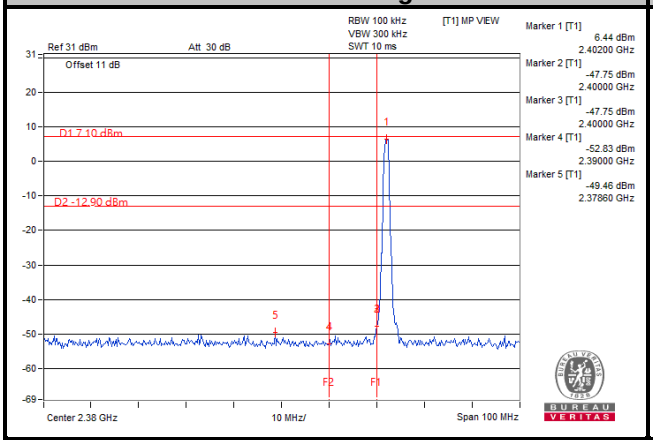	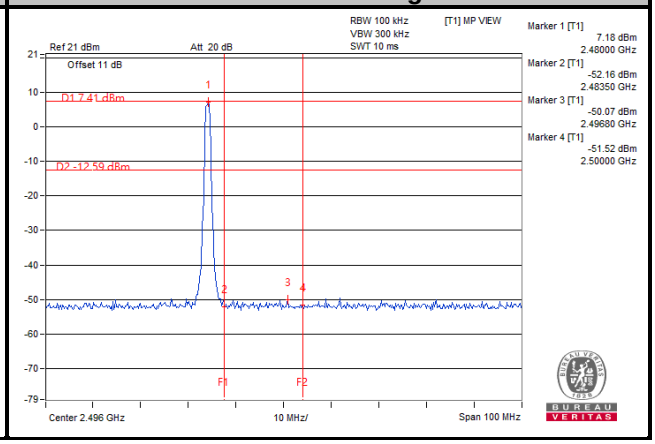

<LE 5.0>

Ch 0

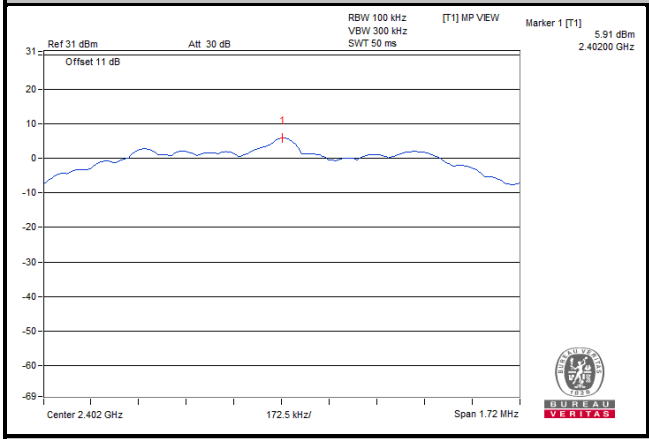

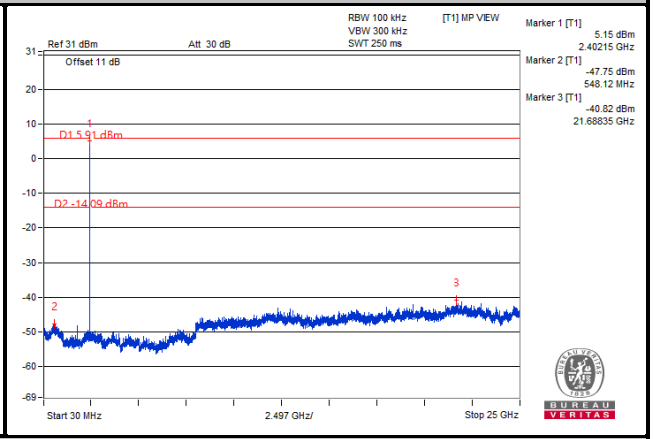

Ch 19

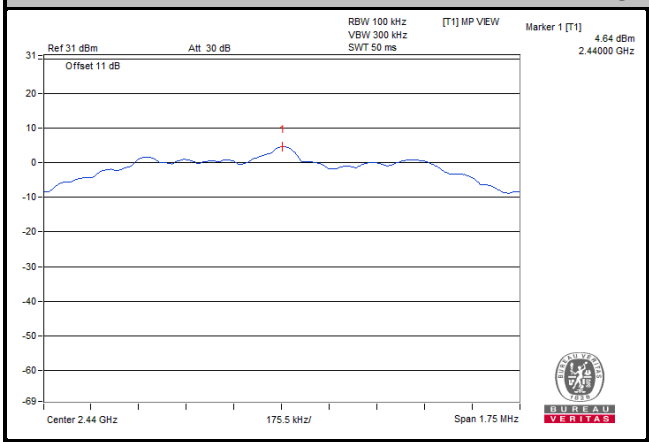

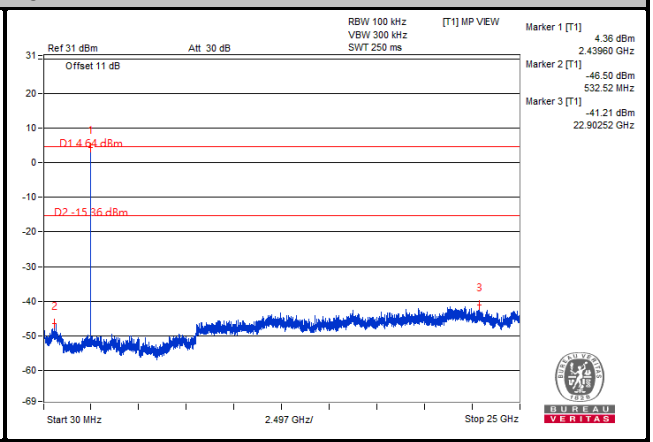

Ch 39

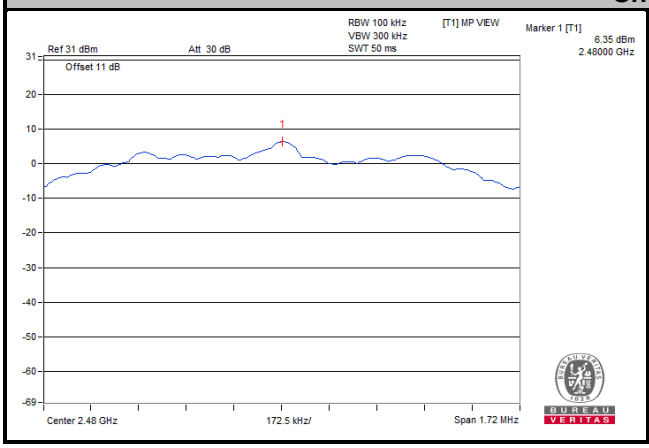

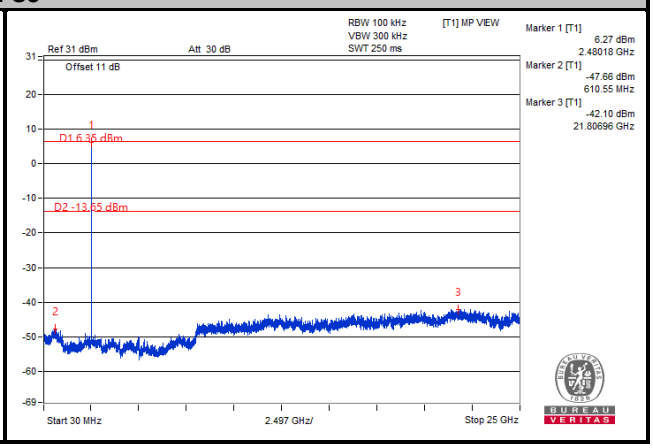

Ch 0 Band Edge	Ch 39 Band Edge
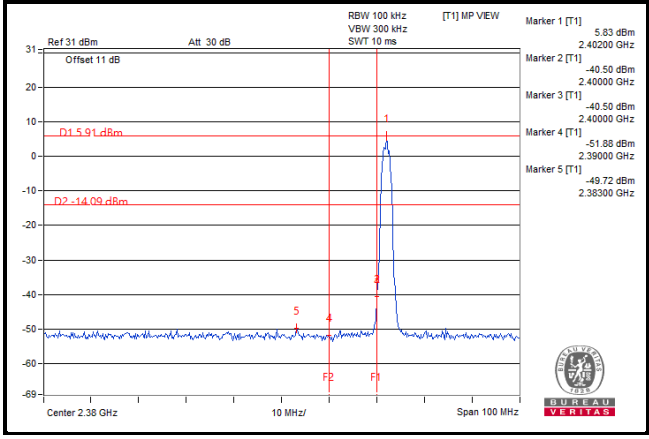	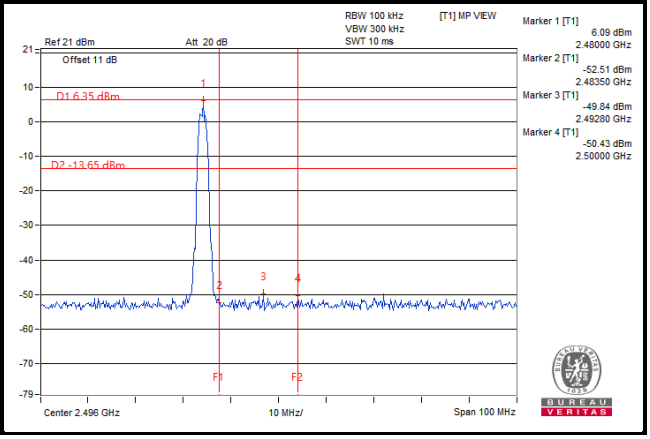

Annex A- Band Edge Measurement

<LE 4.0>

Ch 0

Peak

Horizontal

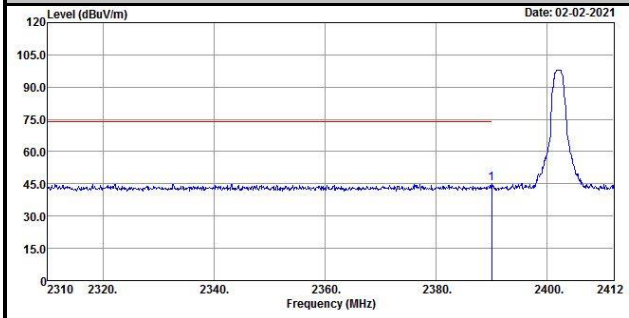

Vertical

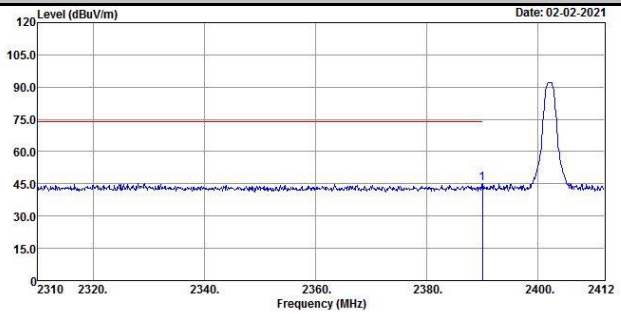

Average

Horizontal

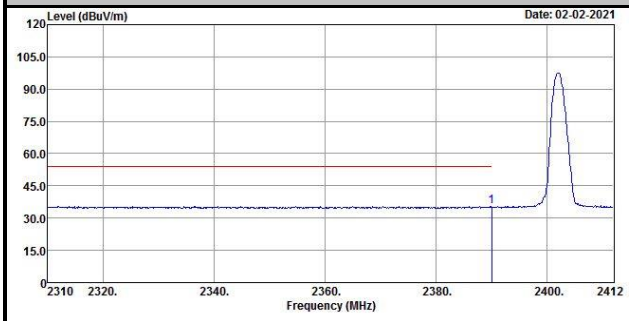

Vertical

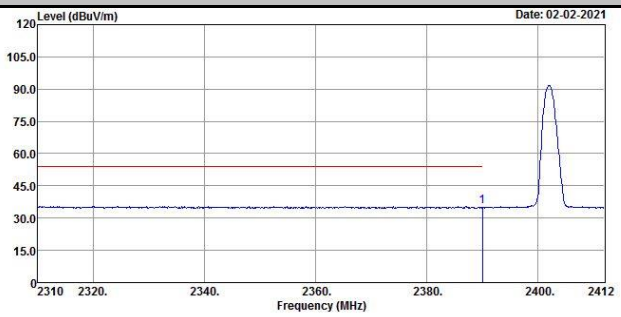

Ch 39

Peak

Horizontal

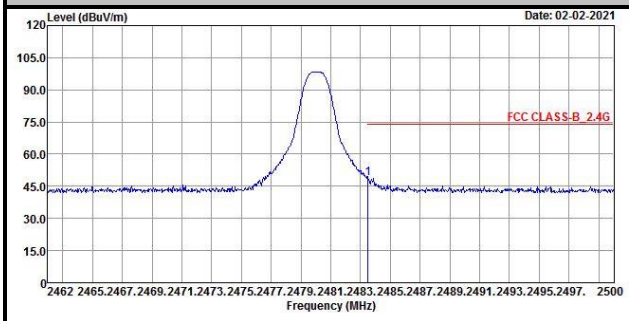

Vertical

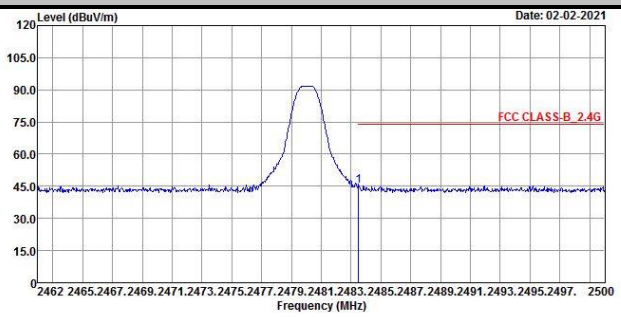

Average

Horizontal

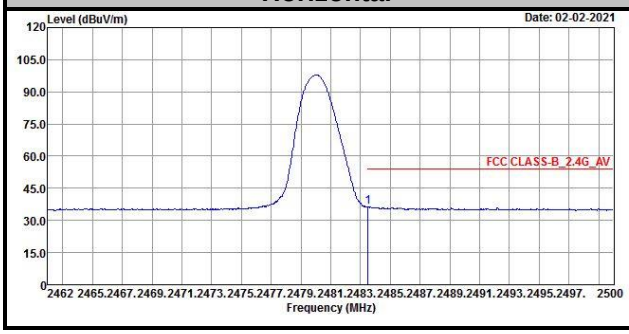

Vertical

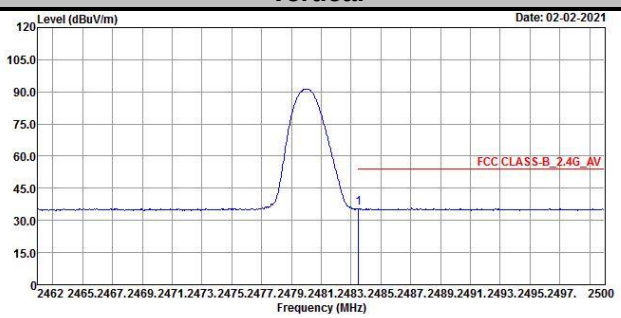

<LE 5.0>

Ch 0

Peak

Horizontal

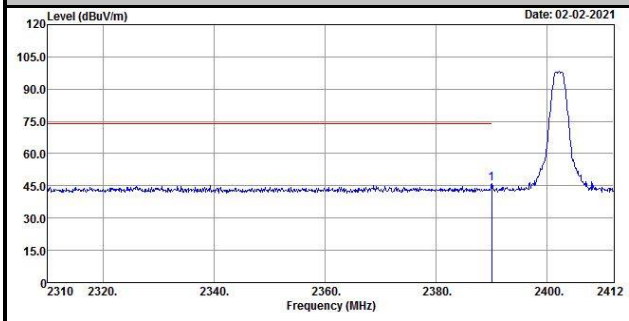

Vertical

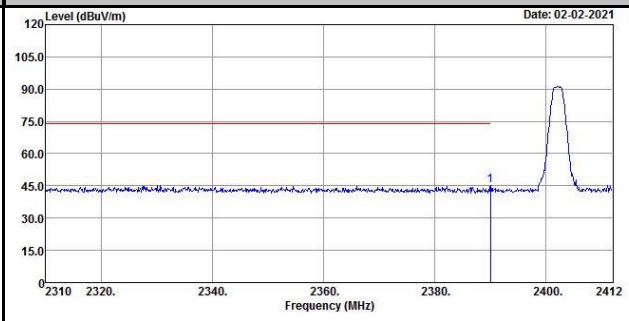

Average

Horizontal

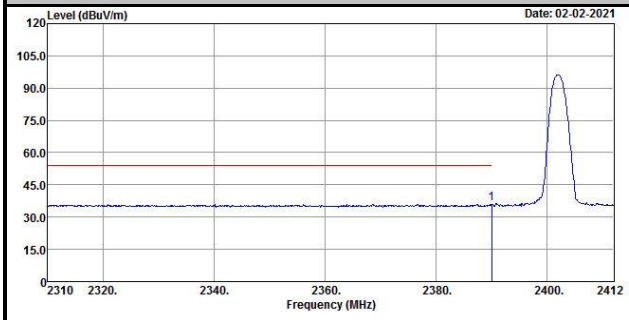

Vertical

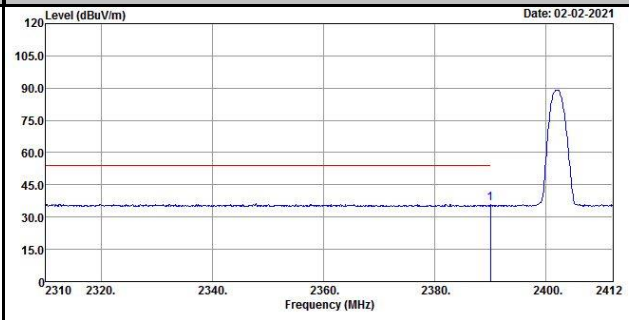

Ch 39

Peak

Horizontal

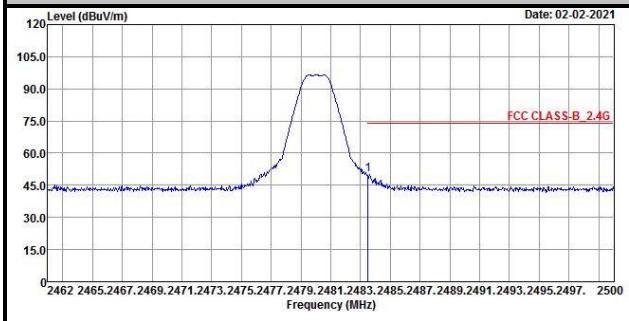

Vertical

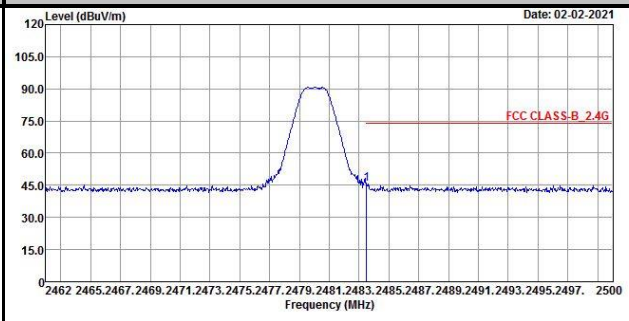

Average

Horizontal

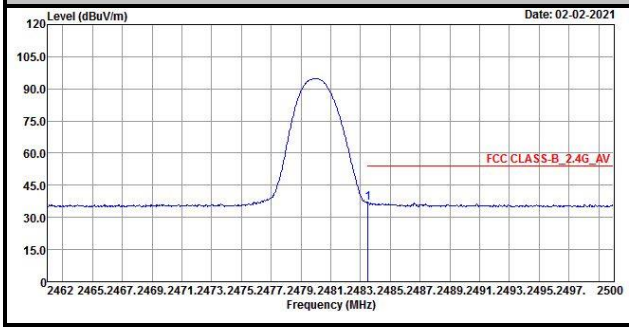

Vertical

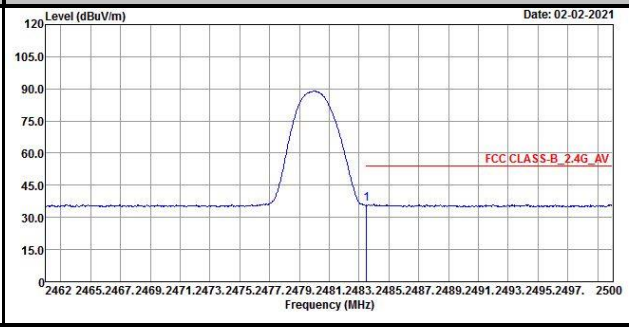

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab
Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com
Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---