




Installation guide

XS4 Mini ANSI with cylindrical latch

SALTO
inspired access

- Eng **Installation guide**
F **Guide d'installation**
E **Guía de instalación**


C i 250xx.. series
C i 260xx..
Model: C20M

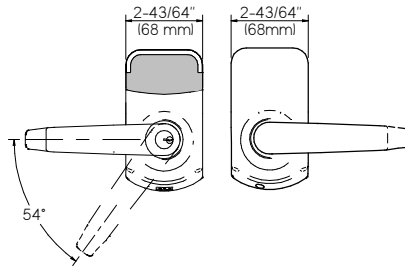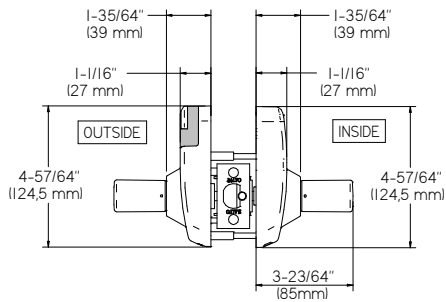

CLUTCH + OVERRIDE MOD.



TORX 20 (X2)




PH2 (X2)




TORX 20 (X1)




PH2 (X2)



TORX 20x12 (X4)
Self tapping screws




BOLT (Depending
on door thickness)



TOOL (X1)

Outside lever

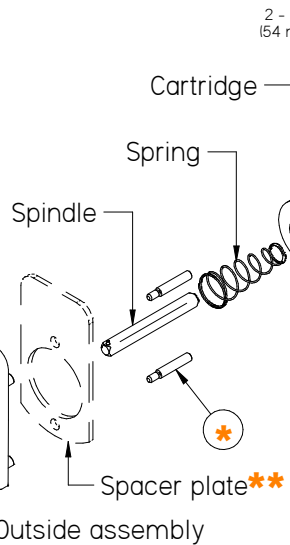


Cartridge

Spring

Spindle

Spacer plate**

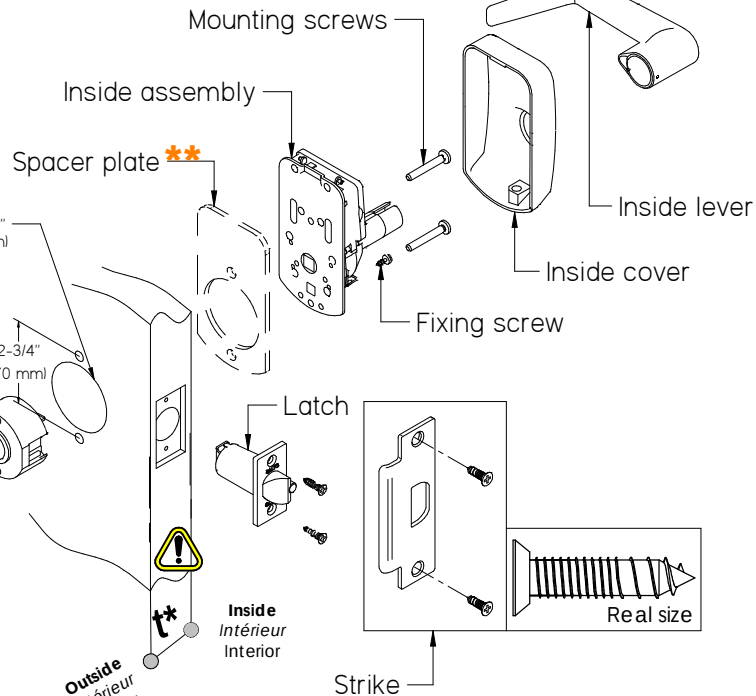

Mounting screws

Inside assembly

Spacer plate**

2 - 1/8" (54 mm)

2 - 3/4" (170 mm)

Latch

Fixing screw

Inside lever

Inside cover

Inside
Intérieur
Interior

Strike

Real size

- (*) Only for door thickness > 2-3/8" (60mm).
(*) Seulement pour portes d'épaisseur > 2-3/8" (60mm).
(*) Solo para grosor de puerta > 2-3/8" (60mm).

- (**) Only for door thickness: 1-1/4" + 1-3/8" order
(**) Seulement pour portes d'épaisseur: 30 + 35 mm commander
(**) Solo para grosor de puerta: 30 + 35 mm pedir

SP226233.02-BM





- (**) Only for door thickness: 1-3/8" + 1-9/16" order
(**) Seulement pour portes d'épaisseur: 35 + 40 mm commander
(**) Solo para grosor de puerta: 35 + 40 mm pedir

SP226233.01-BM

For door preparation, see: 4DS00004 or 4DS00005
Pour préparation de la porte, voir: 4DS00004 ou 4DS00005.
Para mecanizado de puerta, ver: 4DS00004 ó 4DS00005.

Eng Select handing F Choisir le sens de la bêteille E Seleccione mano

OPTION 1: Ci 250 xx series

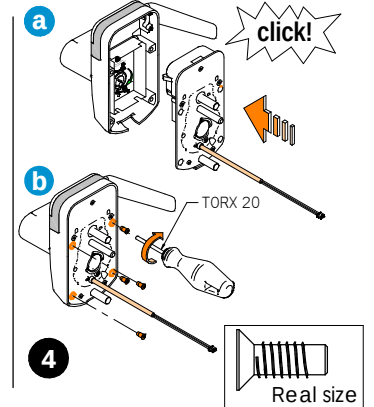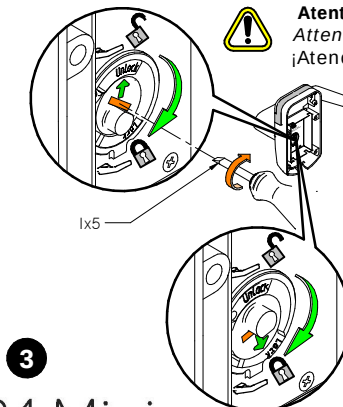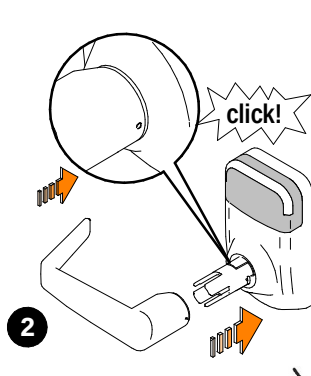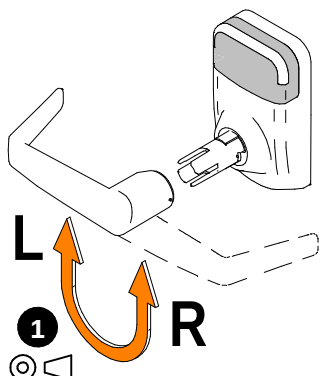


Installation guide


XS4 Mini ANSI with cylindrical latch

SALTO
inspired access

OPTION 2: Ci 260 xx WITH OVERRIDE

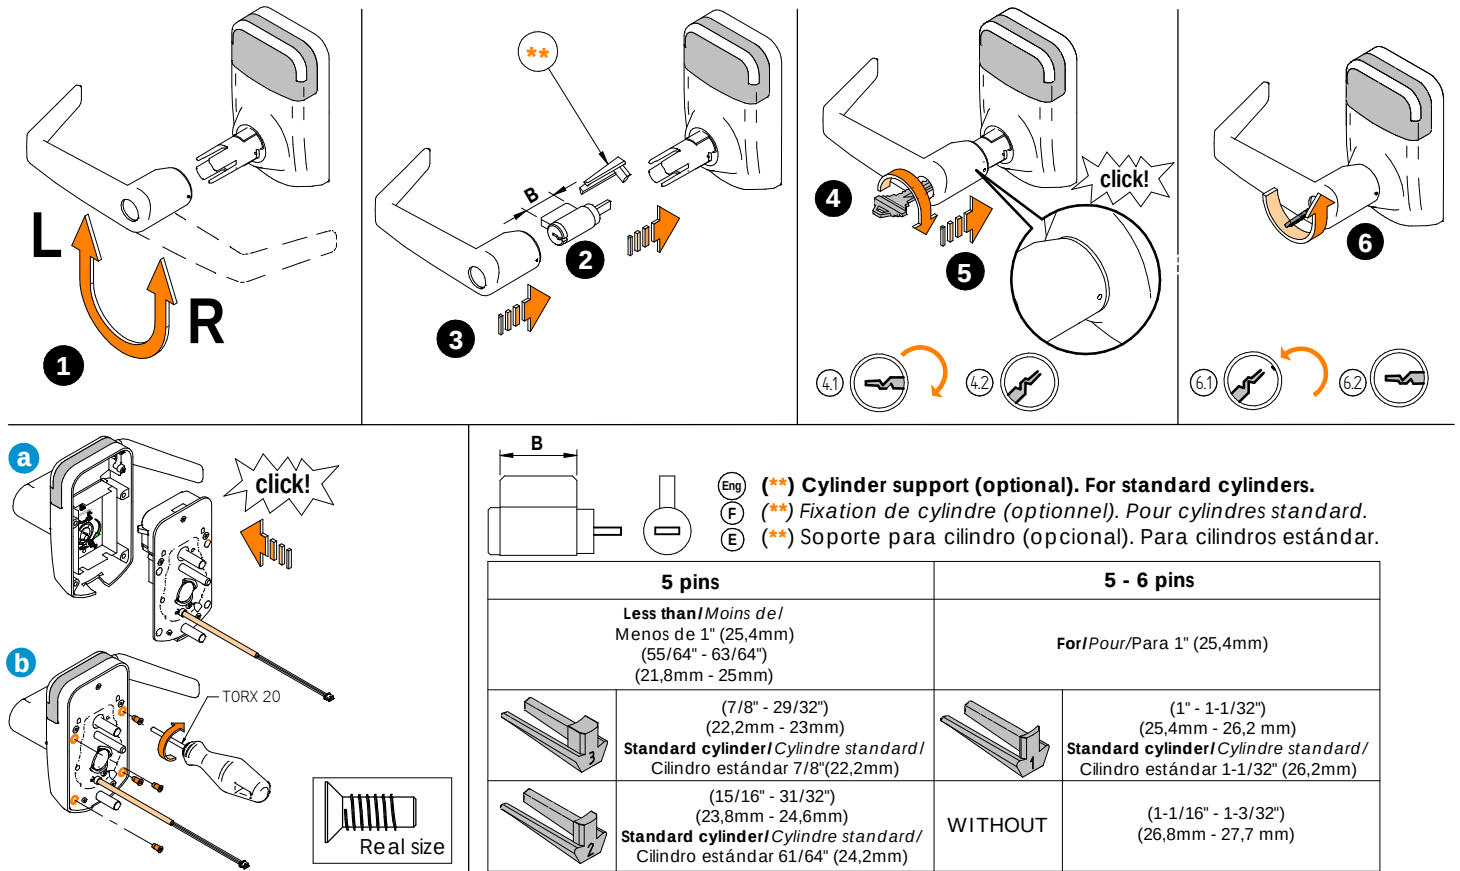

Eng Installation F Installation E Instalación


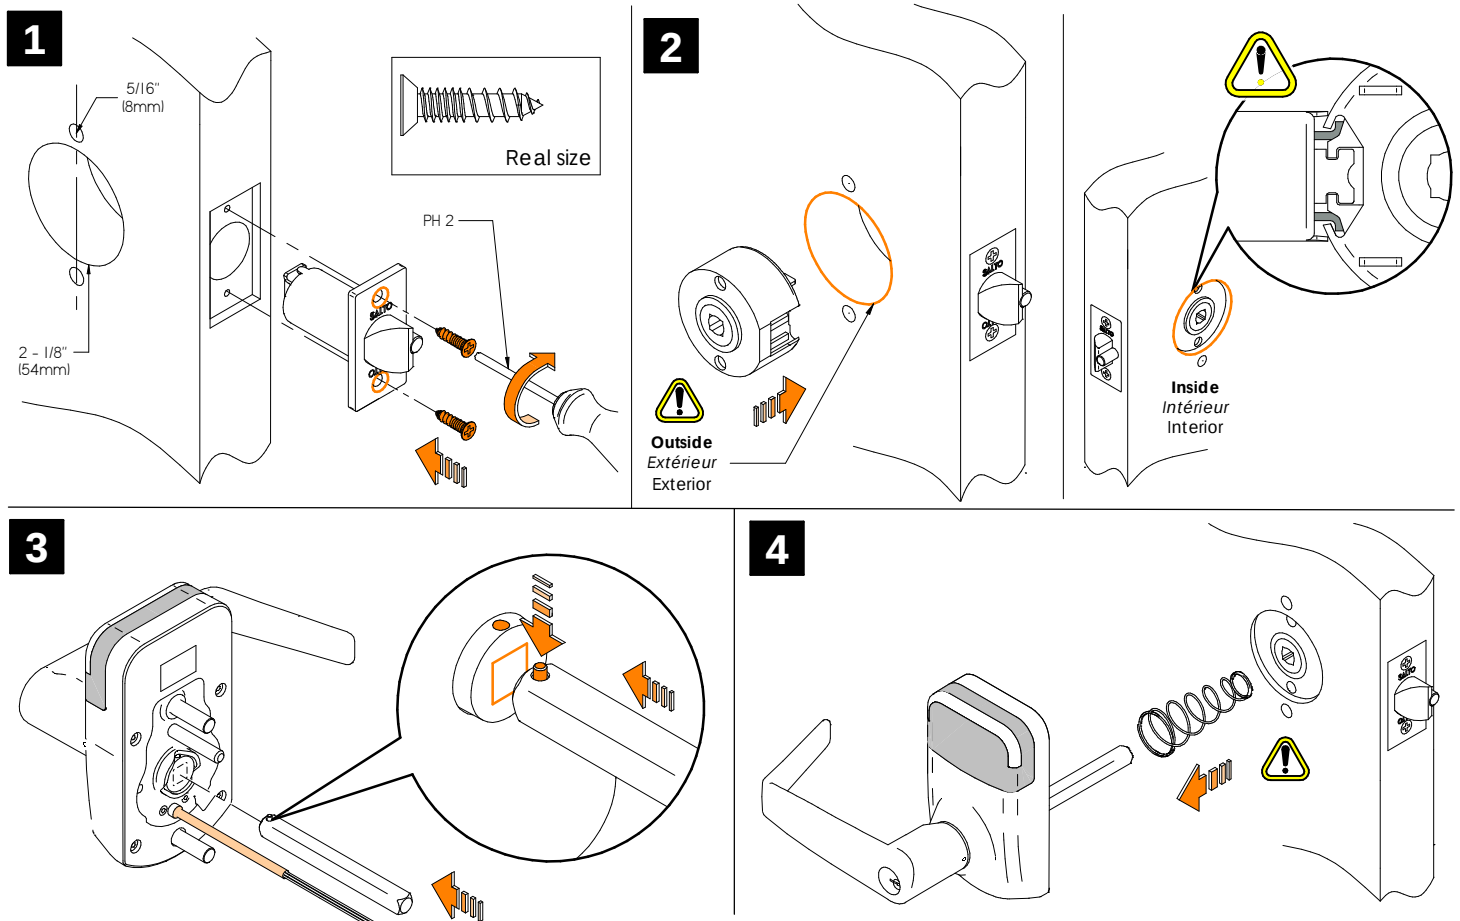


Installation guide




XS4 Mini ANSI with cylindrical latch

SALTO
inspiredaccess


5

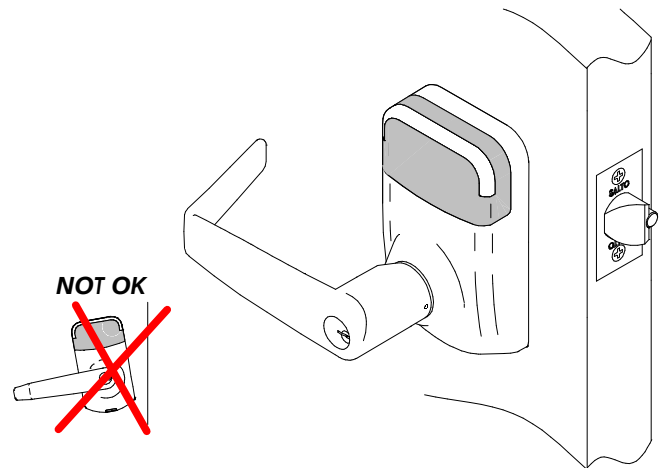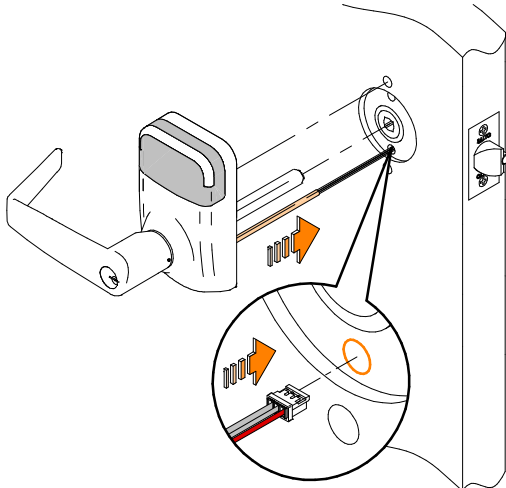


6

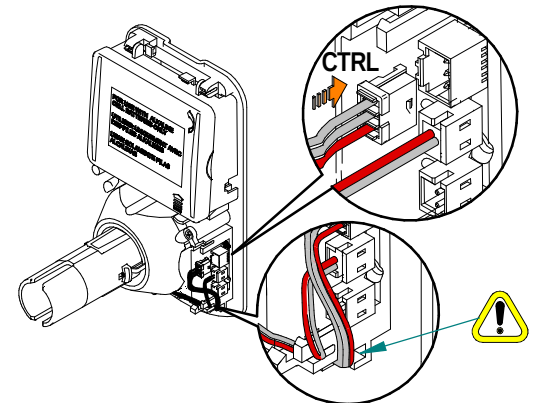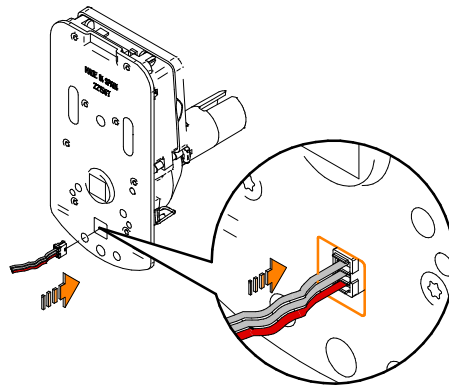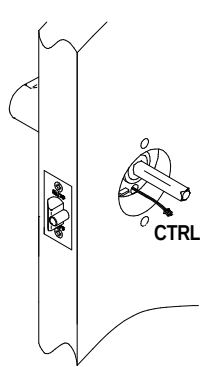


7

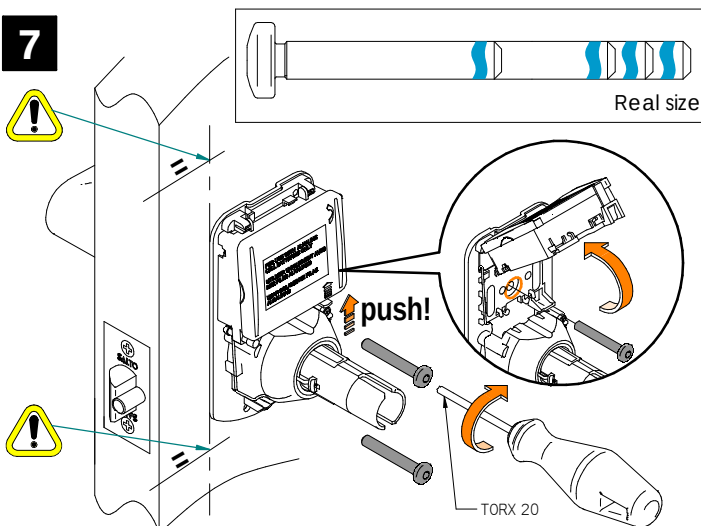


8

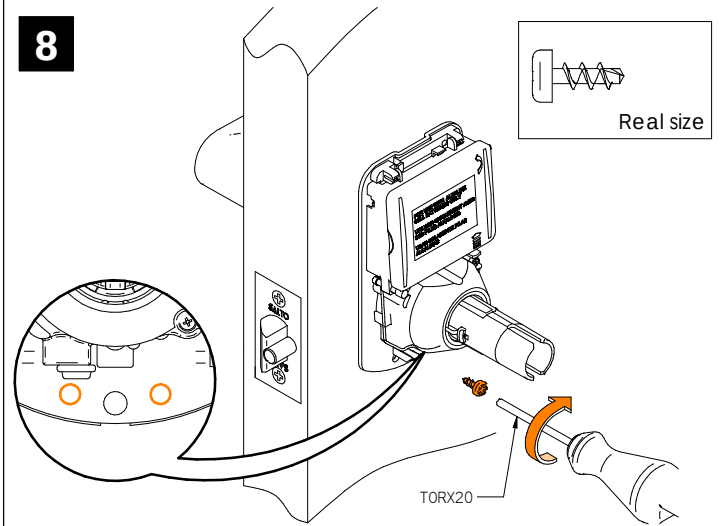

9

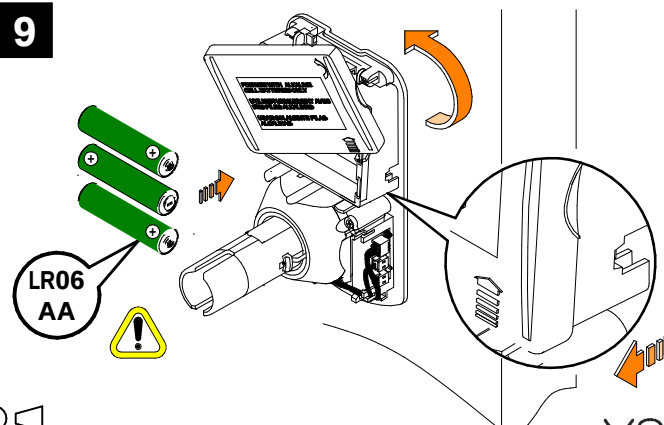

10

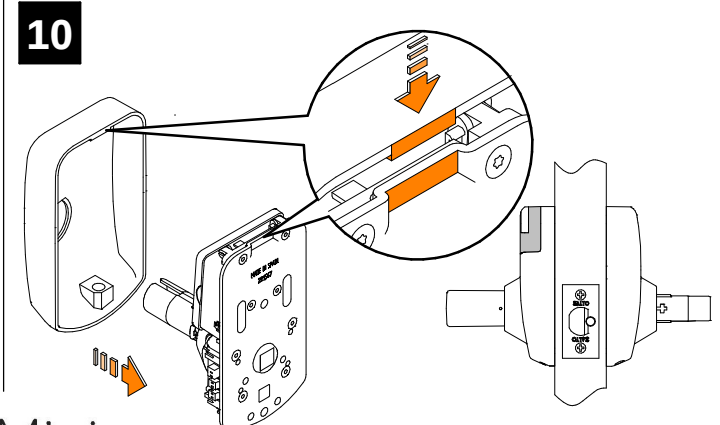


Installation guide


XS4 Mini ANSI with cylindrical latch

SALTO
inspired access

11


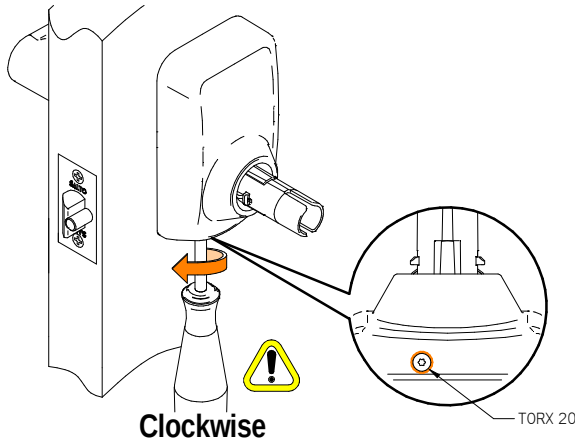


12

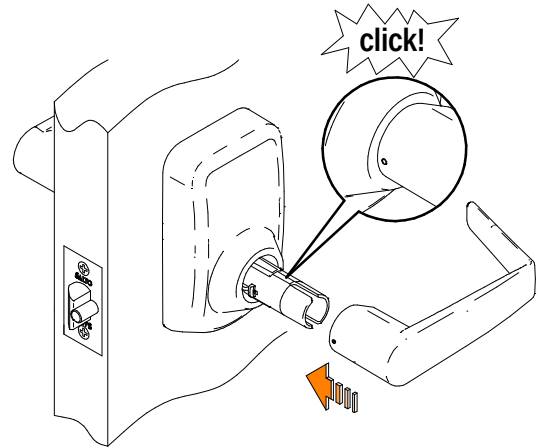





Eng Door detector **F** Détecteur de porte **E** Detector de puerta

! Only for models with door detector/Uniquement pour les modèles avec détecteur de porte/Solo para modelos con detector de puerta.

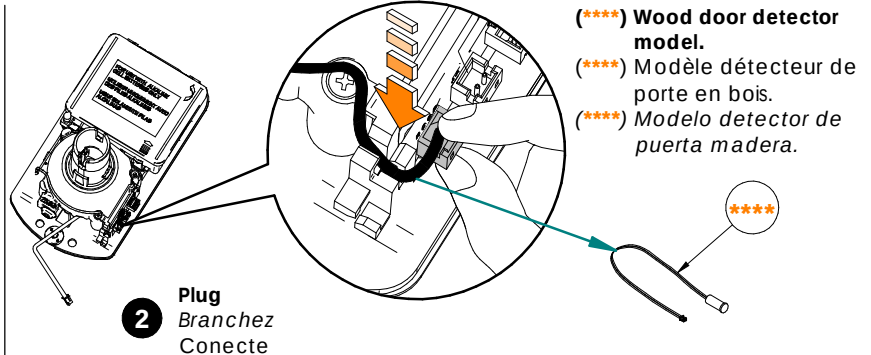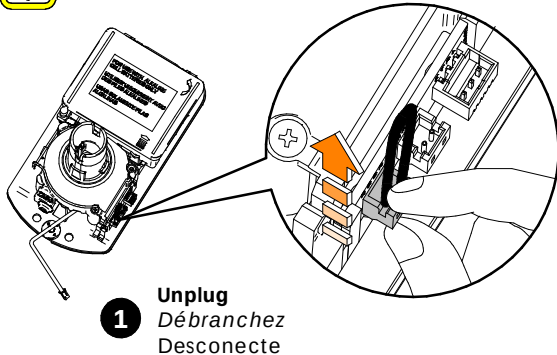

For installation, see: 225469. / Pour installation, voir: 225469. / Para instalación, ver. 225469.

Eng Battery change **F** Remplacer les piles **E** Sustitución de las pilas

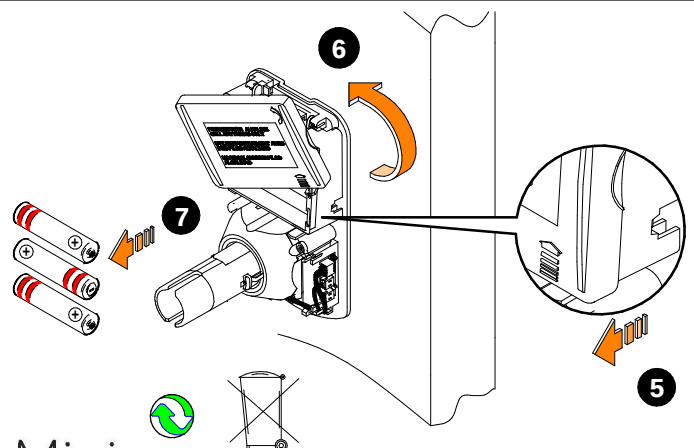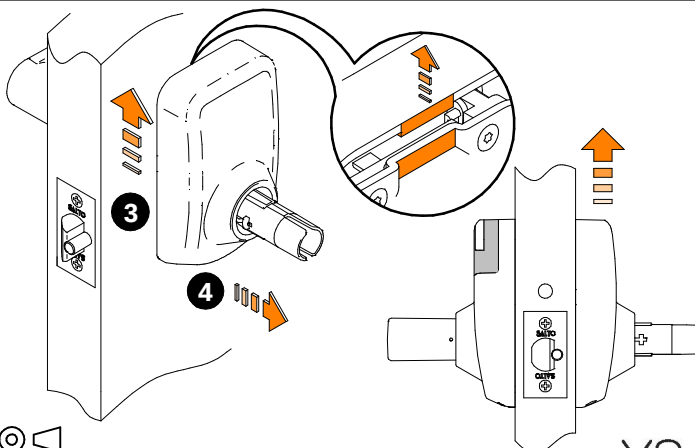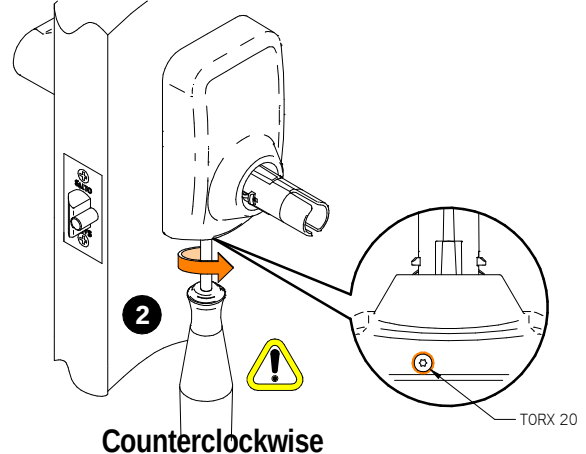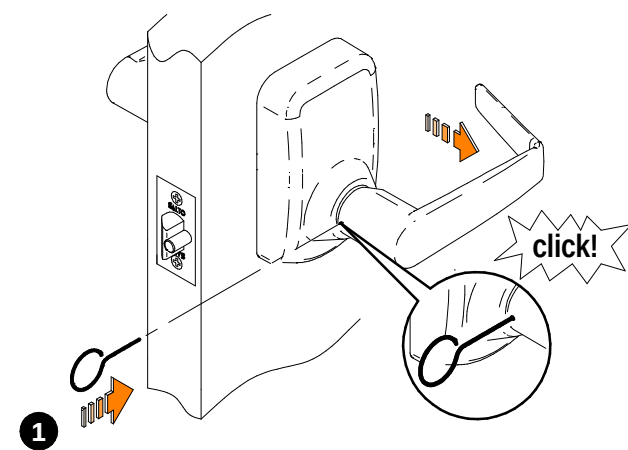

XS4 Mini
© 2022 SALTO Systems S.L.

All contents current at time of publication.
SALTO Systems S.L. reserves the right to change availability of any item in this catalog, its design, construction, and/or materials.

4/4 225155-ED.1- 28/02/2022