

FCC TEST REPORT

For

Innovation First, Inc.

VEXnet SERVER

Test Model: 210-8909-000

Prepared for	:	Innovation First, Inc.
Address	:	1519 INT.30 W, Greenville Texas 75402, United States
Prepared by	:	Guangzhou LCS Compliance Testing Laboratory Ltd.
Address	:	No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China
Tel	:	(+86) 020-39166689
Fax	:	(+86) 020-39166619
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	June 04, 2026
Number of tested samples	:	2
Sample No.	:	C260604002-1, C260604002-2
Serial number	:	Prototype
Date of Test	:	June 04, 2026 ~ July 16, 2026
Date of Report	:	July 17, 2026

FCC TEST REPORT
FCC CFR 47 PART 15E (15.407)**Report Reference No.** : LCSC06046019EC

Date of Issue : July 17, 2026

Testing Laboratory Name : Guangzhou LCS Compliance Testing Laboratory Ltd.Address : No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou,
Guangdong, ChinaTesting Location/ Procedure : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □**Applicant's Name** : Innovation First, Inc.

Address : 1519 INT.30 W, Greenville Texas 75402, United States

Test Specification

Standard : FCC CFR 47 PART 15E (15.407)

Test Report Form No. : TRF-4-E-149 A/0

TRF Originator : Guangzhou LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Guangzhou LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Guangzhou LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Guangzhou LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : VEXnet SERVER

Trade Mark : N/A

Test Model : 210-8909-000


Ratings : Please Refer to Page 6

Result : PASS**Supervised by:**

Lifeng Le/ Administrator

Compiled by:

Justin Zhu/ Technique Director

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. :	LCSC06046019EC	<u>July 17, 2026</u> Date of issue
--------------------------	-----------------------	---------------------------------------

Test Model.....	: 210-8909-000
EUT.....	: VEXnet SERVER
Applicant.....	: Innovation First, Inc.
Address.....	: 1519 INT.30 W, Greenville Texas 75402, United States
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Innovation First, Inc.
Address.....	: 1519 INT.30 W, Greenville Texas 75402, United States
Telephone.....	: /
Fax.....	: /
Factory.....	: /
Address.....	: /
Telephone.....	: /
Fax.....	: /

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 17, 2026	Initial Issue	---

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	7
1.3 EXTERNAL I/O CABLE	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
1.6. MEASUREMENT UNCERTAINTY	8
1.7. DESCRIPTION OF TEST MODES	8
1.8. CHANNEL LIST AND FREQUENCY	9
2. TEST METHODOLOGY	10
2.1. EUT CONFIGURATION	10
2.2. EUT EXERCISE	10
2.3. GENERAL TEST PROCEDURES	10
2.4. TEST SAMPLE	10
3. SYSTEM TEST CONFIGURATION	11
3.1. JUSTIFICATION	11
3.2. EUT EXERCISE SOFTWARE	11
3.3. SPECIAL ACCESSORIES	11
3.4. BLOCK DIAGRAM/SCHEMATICS	11
3.5. EQUIPMENT MODIFICATIONS	11
3.6. TEST SETUP	11
4. SUMMARY OF TEST RESULTS	12
5. TEST RESULT	13
5.1. 26DB OCCUPIED BANDWIDTH MEASUREMENT	13
5.2. 99% OCCUPIED BANDWIDTH MEASUREMENT	14
5.3. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	15
5.4. POWER SPECTRAL DENSITY MEASUREMENT	17
5.5. RADIATED EMISSIONS MEASUREMENT	19
5.6. POWER LINE CONDUCTED EMISSIONS	39
5.7 EMISSIONS IN RESTRICTED BANDS	44
5.8. FREQUENCY STABILITY	99
5.9. ON TIME AND DUTY CYCLE	100
5.10. ANTENNA REQUIREMENTS	101
6. LIST OF MEASURING EQUIPMENTS	102
7. TEST SETUP PHOTOGRAPHS OF EUT	103
8. EXTERIOR PHOTOGRAPHS OF THE EUT	103
9. INTERIOR PHOTOGRAPHS OF THE EUT	103

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: VEXnet SERVER
Test Model	: 210-8909-000
Hardware Version	: /
Software Version	: /
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz~2462MHz
Channel Spacing	: 5MHz
Channel Number	: 11 Channels for 20MHz bandwidth (2412~2462MHz) 7 Channels for 40MHz bandwidth (2422~2452MHz)
Modulation Type	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: Ant1: FPC Antenna, 2.73dBi(Max.) Ant2: FPC Antenna, 2.73dBi(Max.)
WIFI(5.2G Band)	:
Frequency Range	: 5180MHz~5240MHz, 5250MHz~5250MHz
Channel Number	: 4 Channels for 20MHz bandwidth(5180MHz~5240MHz) 2 channels for 40MHz bandwidth(5190MHz~5230MHz) 1 channels for 80MHz bandwidth(5210MHz) 1 channels for 160MHz bandwidth(5250MHz)
Modulation Type	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: Ant1: FPC Antenna, 3.54dBi(Max.) Ant2: FPC Antenna, 3.54dBi(Max.) Ant3: FPC Antenna, 3.54dBi(Max.)
WIFI(5.3G Band)	:
Frequency Range	: 5260MHz~5320MHz
Channel Number	: 4 Channels for 20MHz bandwidth(5260MHz~5320MHz) 2 channels for 40MHz bandwidth(5270MHz~5310MHz) 1 channels for 80MHz bandwidth(5290MHz) 1 channels for 160MHz bandwidth(5250MHz)
Modulation Type	: IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: Ant1: FPC Antenna, 3.54dBi(Max.) Ant2: FPC Antenna, 3.54dBi(Max.) Ant3: FPC Antenna, 3.54dBi(Max.)
WIFI(5.5G Band)	:
Frequency Range	: 5500MHz~5700MHz
Channel Number	: 11 Channels for 20MHz bandwidth(5500MHz~5700MHz) 5 Channels for 40MHz bandwidth(5510MHz~5670MHz) 2 Channels for 80MHz bandwidth(5530MHz, 5610MHz) 1 channels for 160MHz bandwidth(5570MHz)

Modulation Type : IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : Ant1: FPC Antenna, 3.54dBi(Max.)
 Ant2: FPC Antenna, 3.54dBi(Max.)
 Ant3: FPC Antenna, 3.54dBi(Max.)

WIFI(5.8G Band) :

Frequency Range : 5745MHz~5825MHz

Channel Number : 5 channels for 20MHz bandwidth(5745MHz~5825MHz)
 2 channels for 40MHz bandwidth(5755MHz~5795MHz)
 1 channels for 80MHz bandwidth(5775MHz)

Modulation Type : IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
 IEEE 802.11ax: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : Ant1: FPC Antenna, 3.54dBi(Max.)
 Ant2: FPC Antenna, 3.54dBi(Max.)
 Ant3: FPC Antenna, 3.54dBi(Max.)

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.

1.2. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN JIAKEYUAN INDUSTRY CO., LTD	Power Supply	JKY16U-PD30 W-C	---	FCC

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
USB2.0 Port	1	N/A
PD 12V Port	1	N/A
LAN Port	2	N/A

1.4. Description of Test Facility

Site Description

EMC Lab. : CNAS Registration Number is L11555
 A2LA Certificate Number: 5099.01
 FCC Designation Number is CN1379
 Test Firm Registration Number: 729882

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63 10-2020 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	±3.10dB	(1)
	:	30MHz~200MHz	±2.96dB	(1)
	:	200MHz~1000MHz	±3.10dB	(1)
	:	1GHz~26.5GHz	±3.80dB	(1)
	:	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	±1.63dB	(1)
Power disturbance	:	30MHz~300MHz	±1.60dB	(1)
Output power	:	1GHz-40GHz	±0.57dB	(1)
Power Spectral Density	:	1GHz-40GHz	±1.2dB	(1)
Occupied Channel Bandwidth	:	1GHz-40GHz	±5%	(1)
Conducted RF Spurious Emission	:	9kHz-40GHz	±1.80dB	(1)
Emissions in Restricted Bands	:	1GHz-40GHz	±2.47dB	(1)
Frequency Stability	:	1GHz-40GHz	±25Hz	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case at AC 120V/60Hz.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was determined to be IEEE 802.11ax HE20 MIMO mode (High Channel).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was determined to be IEEE 802.11ax HE20 MIMO mode (High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11a Mode: 6 Mbps, OFDM.

IEEE 802.11n HT20 Mode: MCS0, OFDM.

IEEE 802.11n HT40 Mode: MCS0, OFDM.

IEEE 802.11ac VHT20 Mode: MCS0

IEEE 802.11ac VHT40 Mode: MCS0, OFDM.

IEEE 802.11ac VHT80 Mode: MCS0, OFDM.

IEEE 802.11ac VHT160 Mode: MCS0, OFDM.

IEEE 802.11ax HE20 Mode: HE1MCS0, RU242, OFDM, OFDMA.

IEEE 802.11ax HE40 Mode: HE1MCS0, RU484, OFDM, OFDMA.

IEEE 802.11ax HE80 Mode: HE1MCS0, RU996, OFDM, OFDMA.

IEEE 802.11ax HE160 Mode: HE1MCS0, RU996, OFDM, OFDMA.

Note: for 802.11ax mode, all RU are tested, and only the worst RU (full RU) are recorded in the report.

Antenna & Bandwidth

Antenna	Chain1 (Ant1)				Chain2 (Ant2)				Chain3 (Ant3)				Simultaneously
Bandwidth (MHz)	20	40	80	160	20	40	80	160	20	40	80	160	/
IEEE 802.11a	☒	☐	☐	☐	☒	☐	☐	☐	☒	☐	☐	☐	☐
IEEE 802.11n	☒	☒	☐	☐	☒	☒	☐	☐	☒	☒	☐	☐	☒
IEEE 802.11ac	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
IEEE 802.11ax	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

1.8. Channel List and Frequency

U-NI-2A

Frequency Band	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
5250-5350MHz	50	5250	58	5290
	52	5260	60	5300
	54	5270	62	5310
	56	5280	64	5320
For IEEE 802.11a/n HT20/ac VHT20/ax HE20, Channel 52, 60 and 64 were tested. For IEEE 802.11n HT40/ac VHT40/ax HE40, Channel 54 and 62 were tested. For IEEE 802.11ac VHT80/ax HE80, Channel 58 was tested. For IEEE 802.11ac VHT160/ ax HE160, Channel 50 was tested.				

U-NI-2C

Frequency Band	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
5470-5725MHz	100	5500	118	5590
	102	5510	120	5600
	104	5520	122	5610
	106	5530	124	5620
	108	5540	126	5630
	110	5550	128	5640
	112	5560	132	5660
	114	5570	134	5670
	116	5580	136	5680
	--	--	140	5700
For IEEE 802.11a/n HT20/ac VHT20/ax HE20, Channel 100, 116 and 140 were tested. For IEEE 802.11n HT40/ac VHT40/ax HE40, Channel 102, 110 and 134 were tested. For IEEE 802.11ac VHT80/ax HE80, Channel 106, 122 were tested. For IEEE 802.11ac VHT160/ax HE160, Channel 114 was tested.				

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Guangzhou LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB789033 D02 General UNII Test Procedures New Rules v02r01 and KDB 662911 D01 Multiple Transmitter Output v02r01 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2020 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2020.

2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(C260604002-1)	Engineer sample – continuous transmit
Sample 2(C260604002-2)	Normal sample – Intermittent transmit

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software provided by application.

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Guangzhou LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart E			
FCC Rules	Description of Test	Result	Remark
§15.407(a)	26dB Bandwidth	Compliant	Appendix C.1 & Appendix D.1
§15.407(a)	Maximum Conducted Output Power	Compliant	Appendix C.2 & Appendix D.2
§15.407(a)	Power Spectral Density	Compliant	Appendix C.3 & Appendix D.3
§15.209, §15.407(b)	Radiated Emissions	Compliant	Note 1
§15.207(a)	AC Conducted Emissions	Compliant	Note 1
§15.209, §15.407(b)	Emissions in Restricted Bands	Compliant	Appendix C.4 & Appendix D.4
§15.407(g)	Frequency Stability	Compliant	Appendix C.5 & Appendix D.5
/	On Time and Duty Cycle	/	Only reported; Appendix C.6 & Appendix D.6
§15.203	Antenna Requirements	Compliant	Note 1
§15.407 §2.1091	RF Exposure	Compliant	Note 2

Remark:

1. Note 1 – Test results inside test report;
2. Note 2 – Test results in other test report (RF Exposure Evaluation);

5. TEST RESULT

5.1. 26dB Occupied Bandwidth Measurement

5.1.1. Standard Applicable

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

5.1.2. Measuring Instruments and Setting


Please refer to equipment list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span	> 26dB Bandwidth
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.1.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The RBW = 1% - 3% of occupied bandwidth, VBW = 3*RBW;
3. Measured the spectrum width with power higher than 26dB below carrier.

5.1.4. Test Setup Layout

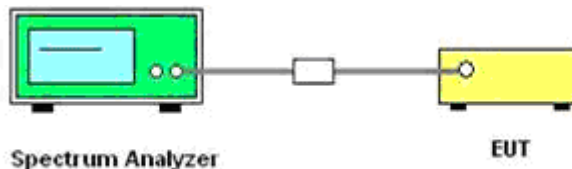

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test Result of 26dB Occupied Bandwidth

PASS

Please refer to Appendix C.1 & Appendix D.1

Remark:

1. Measured 26dB bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ax HE20, IEEE 802.11ac VHT40, IEEE 802.11ax HE40, IEEE 802.11ac VHT80, IEEE 802.11ax HE80, IEEE 802.11ac VHT160, IEEE 802.11ax HE160;

5.2. 99% Occupied Bandwidth Measurement

5.2.1. Standard Applicable

According to §2.1049: The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

5.2.2. Measuring Instruments and Setting


Please refer to equipment list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Set RBW = 1%~5% OBW; VBW $\geq$ 3*RBW;
3. Measured the 99% occupied bandwidth by related function of the spectrum analyzer.

5.2.4. Test Setup Layout

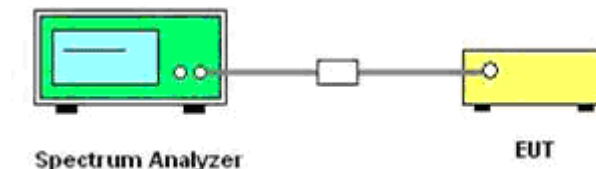

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of 99% Occupied Spectrum Bandwidth

Not Applicable

Remark:

1. Measured 99% bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ax HE20, IEEE 802.11ac VHT40, IEEE 802.11ax HE40, IEEE 802.11ac VHT80, IEEE 802.11ax HE80, IEEE 802.11ac VHT160, IEEE 802.11ax HE160.

5.3. Maximum Conducted Output Power Measurement

5.3.1. Standard Applicable

(1) For the band 5.25-5.35 GHz and 5.47-5.725 GHz

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the power meter.


5.3.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Section 3 (a) Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
 - The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

5.3.4. Test Setup Layout

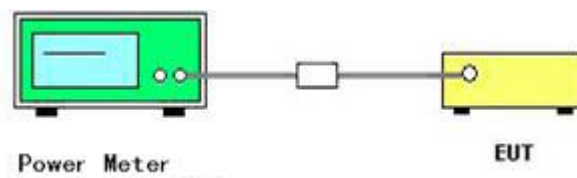

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Maximum Conducted Output Power

Limits

5.3GWIFI

Mode	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Antenna 3 Gain (dBi)	Directional Gain (dBi)	Power Limit (dBm)
IEEE 802.11a	3.54	3.54	3.54	/	24
IEEE 802.11n/ac/ax MIMO	3.54	3.54	3.54	8.31	24

Note: Directional Gain=3.54+10*Log(3)

5.5GWIFI

Mode	Antenna 1 Gain (dBi)	Antenna 2 Gain (dBi)	Antenna 3 Gain (dBi)	Directional Gain (dBi)	Power Limit (dBm)
IEEE 802.11a	3.54	3.54	3.54	/	24
IEEE 802.11n/ac/ax MIMO	3.54	3.54	3.54	8.31	24

Note: Directional Gain=3.54+10*Log(3)

PASS

Please refer to Appendix C.2 & Appendix D.2

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at MIMO mode 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ac VHT40, IEEE 802.11ac VHT80, IEEE 802.11ac VHT160, IEEE 802.11ax HE20, IEEE 802.11ax HE40, IEEE 802.11ax HE80, IEEE 802.11ax HE160;
4. Report conducted power = Measured conducted average power + Duty Cycle factor;
5. For power measurements on IEEE 802.11 devices;
 Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$;
 Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;
 Array Gain = $5 \log (NANT/NSS)$ dB or 3 dB, whichever is less, for 20-MHz channel widths with NANT ≥ 5 .

5.4. Power Spectral Density Measurement

5.4.1. Standard Applicable

For the band 5.25-5.35 GHz and 5.47-5.725 GHz

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


5.4.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.4.3. Test Procedures

- 1). The transmitter was connected directly to a Spectrum Analyzer through a directional coupler.
- 2). The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3). Set the RBW = 1MHz.
- 4). Set the VBW $\geq$ 3MHz
- 5). Span=Encompass the entire emissions bandwidth (EBW) of the signal (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 6). Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- 7). Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- 8). Set detector = power averaging (rms).
- 9). Sweep time = auto couple.
- 10). Trace mode = max hold.
- 11). Allow trace to fully stabilize.
- 12). Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively).
- 13). Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25%.
- 14). Use the peak marker function to determine the maximum power level in any 1MHz band segment within the fundamental EBW.

5.4.4. Test Setup Layout

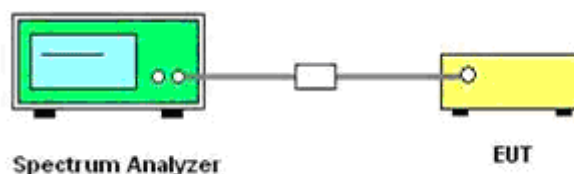

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of Power Spectral Density

Limits

5.3GWIFI

Mode	Antenna 1 Gain (dBi)	Antenna2 Gain (dBi)	Antenna3 Gain (dBi)	Directional Gain (dBi)	PSD Limit (dBm)
IEEE 802.11a	3.54	3.54	3.54	/	11
IEEE 802.11n/ac/ax MIMO	3.54	3.54	3.54	8.31	8.69

Note: Directional Gain=3.54+10*Log(3)

5.5GWIFI

Mode	Antenna 1 Gain (dBi)	Antenna2 Gain (dBi)	Antenna3 Gain (dBi)	Directional Gain (dBi)	PSD Limit (dBm)
IEEE 802.11a	3.54	3.54	3.54	/	11
IEEE 802.11n/ac/ax MIMO	3.54	3.54	3.54	8.31	8.69

Note: Directional Gain=3.54+10*Log(3)

PASS

Please refer to Appendix C.3 & Appendix D.3

Remark

1. Measured power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ax HE20, IEEE 802.11ac VHT40, IEEE 802.11ax HE40, IEEE 802.11ac VHT80, IEEE 802.11ax HE80, IEEE 802.11ac VHT160, IEEE 802.11ax HE160;
4. Report conducted PSD = Measured conducted average power + Duty Cycle factor;

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m at 3m).

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.5.4. Test Setup Layout

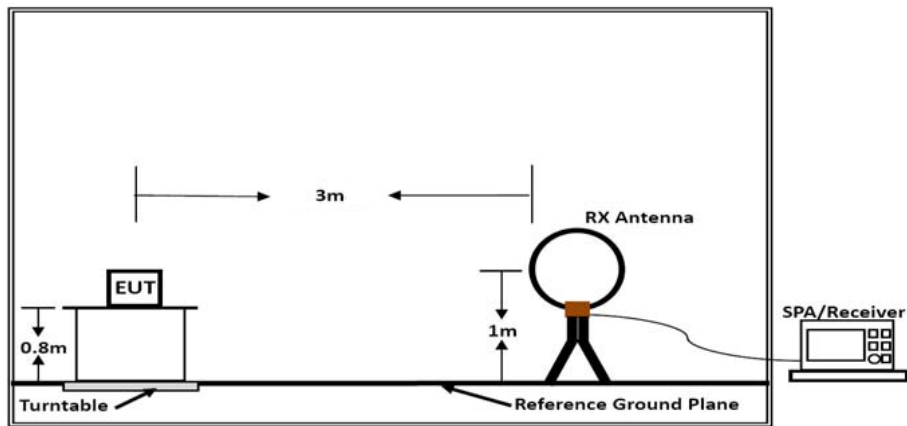

Below 30MHz

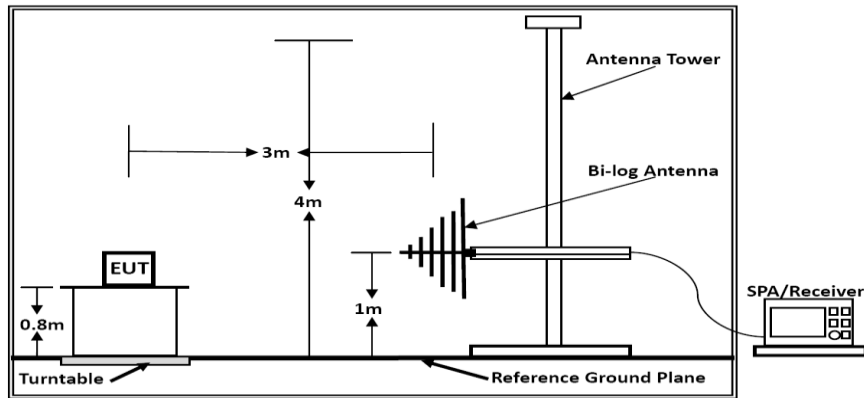

Below 1GHz

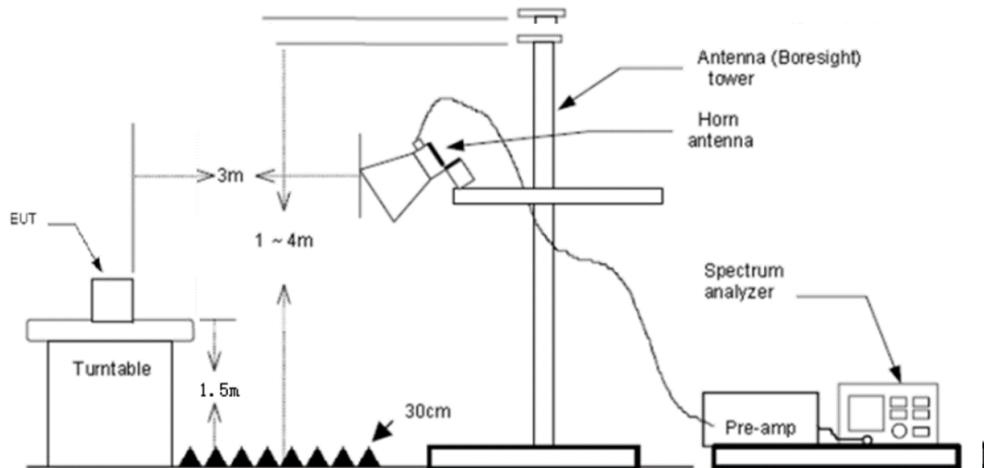

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{FS (dBuV/m)} = \text{RA (dBuV)} + \text{AF (dB/m)} + \text{CL (dB)} - \text{AG (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

5.5.7. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	24.3℃	Humidity	51.6%
Test Engineer	Zhang hai	Configurations	IEEE 802.11a/n/ac/ax

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dB)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.3℃	Humidity	51.6%
Test Engineer	Zhang hai	Configurations	IEEE 802.11a/n/ac/ax

All models were pretested and only the worst modes and channels were recorded in this report.


Test result for IEEE 802.11ax HE20 MIMO mode (High Channel) (Ant1+Ant2+Ant3)

5.3G

Horizontal

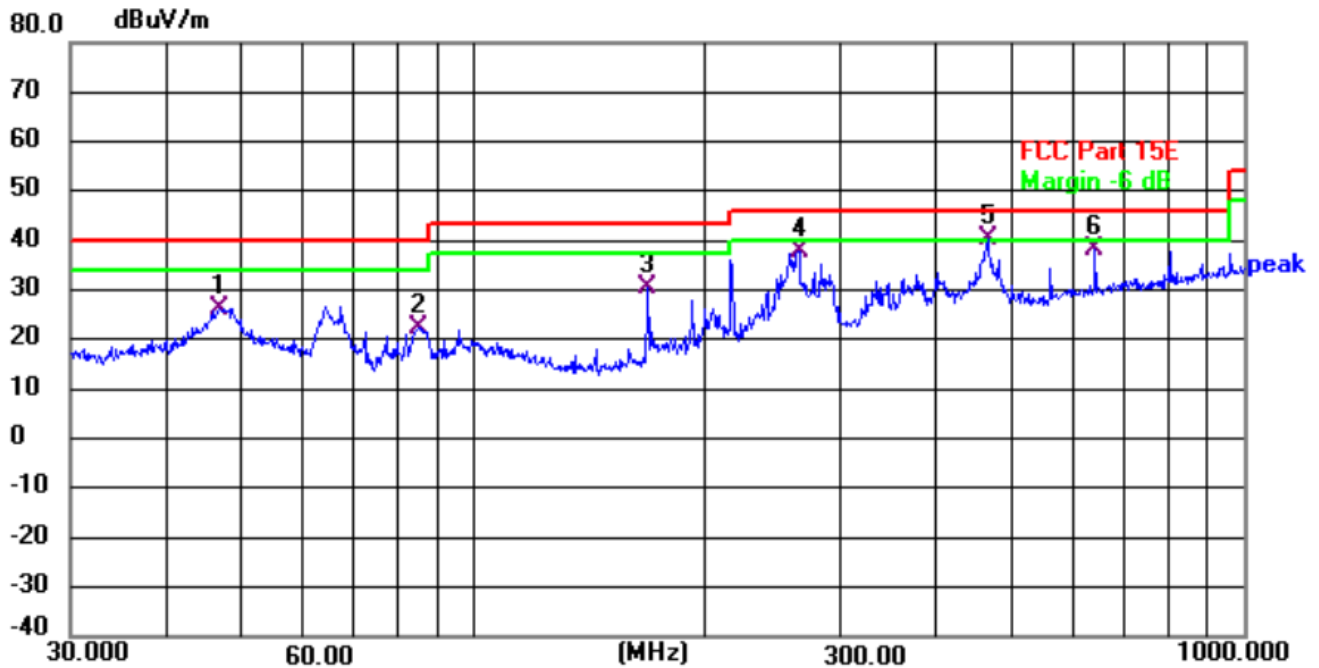


Vertical

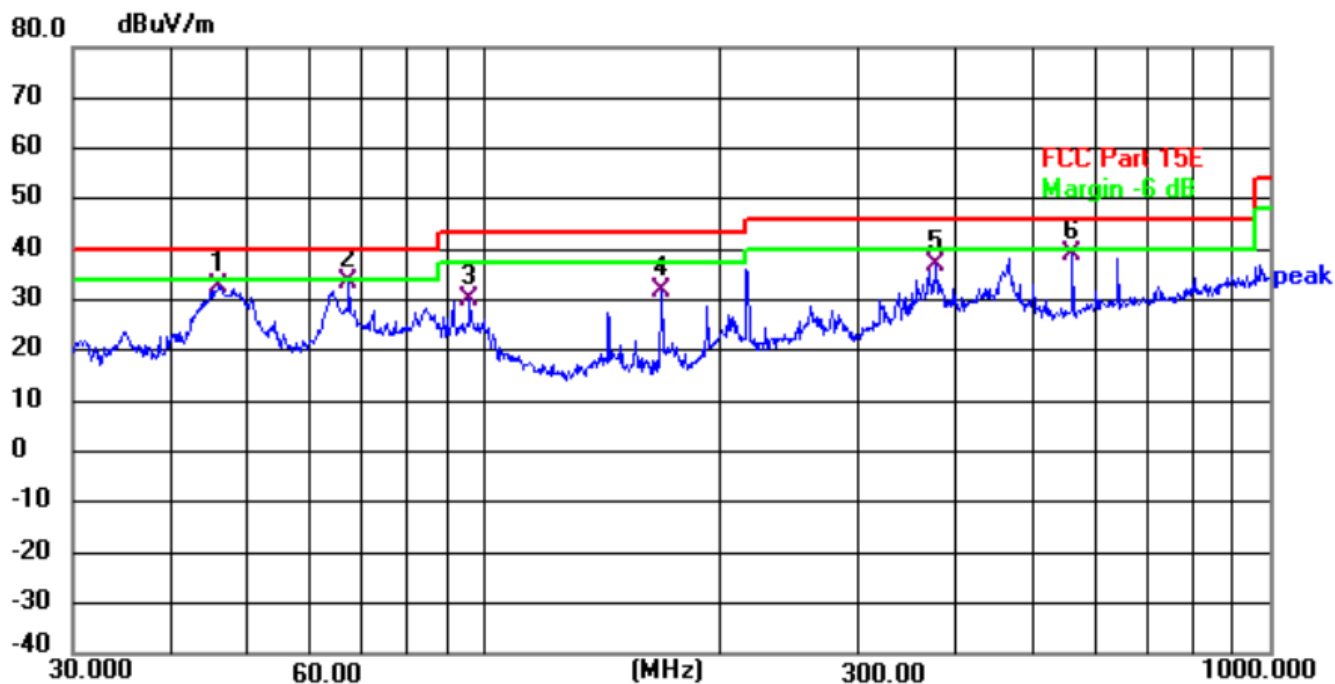

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		46.1779	11.81	20.76	32.57	40.00	-7.43	QP	
2	*	67.4382	15.72	17.81	33.53	40.00	-6.47	QP	
3		96.0985	11.78	18.48	30.26	43.50	-13.24	QP	
4		168.4137	15.50	16.49	31.99	43.50	-11.51	QP	
5		377.2590	12.97	23.84	36.81	46.00	-9.19	QP	
6		560.6928	11.43	27.67	39.10	46.00	-6.90	QP	


5.5G

Horizontal

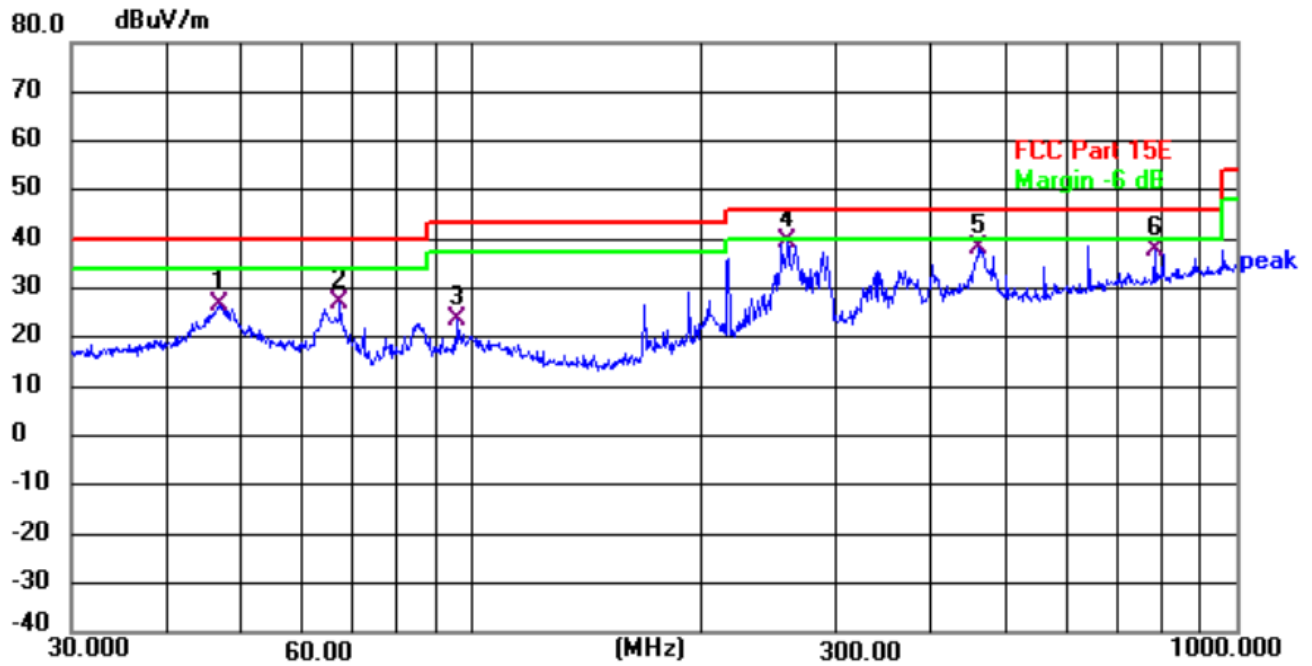

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		46.8302	6.13	20.71	26.84	40.00	-13.16	QP	
2		67.4382	9.24	17.81	27.05	40.00	-12.95	QP	
3		96.0985	5.19	18.48	23.67	43.50	-19.83	QP	
4	*	259.2338	18.76	20.94	39.70	46.00	-6.30	QP	
5		460.7271	12.76	25.53	38.29	46.00	-7.71	QP	
6		782.3453	6.37	31.31	37.68	46.00	-8.32	QP	

Vertical

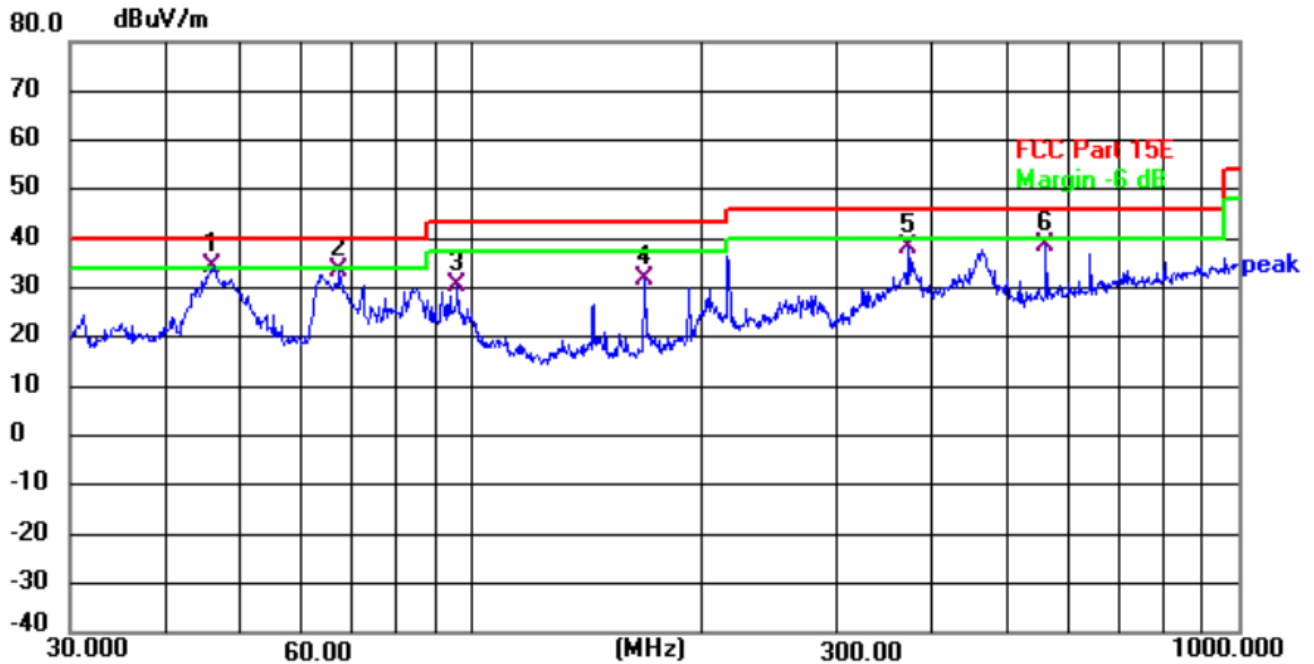

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	46.1779	13.44	20.76	34.20	40.00	-5.80	QP	
2		67.4382	15.50	17.81	33.31	40.00	-6.69	QP	
3		96.0985	12.22	18.48	30.70	43.50	-12.80	QP	
4		168.4137	15.41	16.49	31.90	43.50	-11.60	QP	
5		372.0045	14.35	23.75	38.10	46.00	-7.90	QP	
6		560.6928	11.06	27.67	38.73	46.00	-7.27	QP	

Note: (1). Pre-scan all modes and recorded the worst case results in this report IEEE 802.11ax HE20 MIMO mode (High Channel)

2). Emission level (dBuV/m) = 20 log Emission level (uV/m). Margin= Level-limit;

3). Factor=Antenan Factor+Cable Loss-Pre Factor;Level=Reading+Factor.

5.5.9. Results for Radiated Emissions (1 – 40 GHz)

Note: All the modes have been tested and recorded worst mode in the report.

UNII Band 2A

a mode-ant 1-the worst

Channel 52 / 5260 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.78	40.36	34.22	36.83	10.53	48.28	68.20	-19.92	Peak	Horizontal
15.78	35.63	34.22	36.83	10.53	43.55	54.00	-10.45	Average	Horizontal
15.78	43.36	33.83	36.83	10.53	50.89	68.20	-17.31	Peak	Vertical
15.78	34.55	33.83	36.83	10.53	42.08	54.00	-11.92	Average	Vertical

Channel 60 / 5300 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.90	41.61	34.22	36.83	10.53	49.53	68.20	-18.67	Peak	Horizontal
15.90	33.51	34.22	36.83	10.53	41.43	54.00	-12.57	Average	Horizontal
15.90	44.84	33.83	36.83	10.53	52.37	68.20	-15.83	Peak	Vertical
15.90	29.51	33.83	36.83	10.53	37.04	54.00	-16.96	Average	Vertical

Channel 64 / 5320 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.96	48.40	34.22	36.83	10.53	56.32	68.20	-11.88	Peak	Horizontal
15.96	36.93	34.22	36.83	10.53	44.85	54.00	-9.15	Average	Horizontal
15.96	50.53	33.83	36.83	10.53	58.06	68.20	-10.14	Peak	Vertical
15.96	28.14	33.83	36.83	10.53	35.67	54.00	-18.33	Average	Vertical

IEEE 802.11n HT20 MIMO**Channel 52 / 5260 MHz**

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.78	48.63	34.22	36.83	10.53	56.55	68.20	-11.65	Peak	Horizontal
15.78	36.88	34.22	36.83	10.53	44.80	54.00	-9.20	Average	Horizontal
15.78	43.62	33.83	36.83	10.53	51.15	68.20	-17.05	Peak	Vertical
15.78	32.17	33.83	36.83	10.53	39.70	54.00	-14.30	Average	Vertical

Channel 60 / 5300 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.90	49.62	34.22	36.83	10.53	57.54	68.20	-10.66	Peak	Horizontal
15.90	32.10	34.22	36.83	10.53	40.02	54.00	-13.98	Average	Horizontal
15.90	49.52	33.83	36.83	10.53	57.05	68.20	-11.15	Peak	Vertical
15.90	28.48	33.83	36.83	10.53	36.01	54.00	-17.99	Average	Vertical

Channel 64 / 5320 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.96	47.57	34.22	36.83	10.53	55.49	68.20	-12.71	Peak	Horizontal
15.96	35.94	34.22	36.83	10.53	43.86	54.00	-10.14	Average	Horizontal
15.96	41.46	33.83	36.83	10.53	48.99	68.20	-19.21	Peak	Vertical
15.96	38.36	33.83	36.83	10.53	45.89	54.00	-8.11	Average	Vertical

*IEEE 802.11ac VHT20 MIMO**Channel 52 / 5260 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.78	50.28	34.22	36.83	10.53	58.20	68.20	-10.00	Peak	Horizontal
15.78	33.39	34.22	36.83	10.53	41.31	54.00	-12.69	Average	Horizontal
15.78	41.35	33.83	36.83	10.53	48.88	68.20	-19.32	Peak	Vertical
15.78	36.79	33.83	36.83	10.53	44.32	54.00	-9.68	Average	Vertical

Channel 60 / 5300 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.90	45.40	34.22	36.83	10.53	53.32	68.20	-14.88	Peak	Horizontal
15.90	34.55	34.22	36.83	10.53	42.47	54.00	-11.53	Average	Horizontal
15.90	42.34	33.83	36.83	10.53	49.87	68.20	-18.33	Peak	Vertical
15.90	35.48	33.83	36.83	10.53	43.01	54.00	-10.99	Average	Vertical

Channel 64 / 5320 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.96	43.60	34.22	36.83	10.53	51.52	68.20	-16.68	Peak	Horizontal
15.96	37.76	34.22	36.83	10.53	45.68	54.00	-8.32	Average	Horizontal
15.96	45.49	33.83	36.83	10.53	53.02	68.20	-15.18	Peak	Vertical
15.96	33.79	33.83	36.83	10.53	41.32	54.00	-12.68	Average	Vertical

*IEEE 802.11ax HE20 MIMO**Channel 52 / 5260 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.78	43.61	34.22	36.83	10.53	51.53	68.20	-16.67	Peak	Horizontal
15.78	34.48	34.22	36.83	10.53	42.40	54.00	-11.60	Average	Horizontal
15.78	42.02	33.83	36.83	10.53	49.55	68.20	-18.65	Peak	Vertical
15.78	36.02	33.83	36.83	10.53	43.55	54.00	-10.45	Average	Vertical

Channel 60 / 5300 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.90	47.85	34.22	36.83	10.53	55.77	68.20	-12.43	Peak	Horizontal
15.90	35.90	34.22	36.83	10.53	43.82	54.00	-10.18	Average	Horizontal
15.90	41.68	33.83	36.83	10.53	49.21	68.20	-18.99	Peak	Vertical
15.90	28.96	33.83	36.83	10.53	36.49	54.00	-17.51	Average	Vertical

Channel 64 / 5320 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.96	44.83	34.22	36.83	10.53	52.75	68.20	-15.45	Peak	Horizontal
15.96	33.18	34.22	36.83	10.53	41.10	54.00	-12.90	Average	Horizontal
15.96	40.25	33.83	36.83	10.53	47.78	68.20	-20.42	Peak	Vertical
15.96	32.14	33.83	36.83	10.53	39.67	54.00	-14.33	Average	Vertical

*IEEE 802.11n HT40 MIMO**Channel 54 / 5270 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.81	50.65	34.22	36.83	10.53	58.57	68.20	-9.63	Peak	Horizontal
15.81	30.08	34.22	36.83	10.53	38.00	54.00	-16.00	Average	Horizontal
15.81	40.60	33.83	36.83	10.53	48.13	68.20	-20.07	Peak	Vertical
15.81	34.89	33.83	36.83	10.53	42.42	54.00	-11.58	Average	Vertical

Channel 62 / 5310 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.93	47.69	34.22	36.83	10.53	55.61	68.20	-12.59	Peak	Horizontal
15.93	38.67	34.22	36.83	10.53	46.59	54.00	-7.41	Average	Horizontal
15.93	50.96	33.83	36.83	10.53	58.49	68.20	-9.71	Peak	Vertical
15.93	32.89	33.83	36.83	10.53	40.42	54.00	-13.58	Average	Vertical

*IEEE 802.11ac VHT40 MIMO**Channel 54 / 5270 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.81	44.10	34.22	36.83	10.53	52.02	68.20	-16.18	Peak	Horizontal
15.81	28.14	34.22	36.83	10.53	36.06	54.00	-17.94	Average	Horizontal
15.81	47.91	33.83	36.83	10.53	55.44	68.20	-12.76	Peak	Vertical
15.81	34.77	33.83	36.83	10.53	42.30	54.00	-11.70	Average	Vertical

Channel 62 / 5310 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.93	40.04	34.22	36.83	10.53	47.96	68.20	-20.24	Peak	Horizontal
15.93	35.85	34.22	36.83	10.53	43.77	54.00	-10.23	Average	Horizontal
15.93	43.36	33.83	36.83	10.53	50.89	68.20	-17.31	Peak	Vertical
15.93	29.77	33.83	36.83	10.53	37.30	54.00	-16.70	Average	Vertical

*IEEE 802.11ax HE40 MIMO**Channel 54 / 5270 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.81	47.72	34.22	36.83	10.53	55.64	68.20	-12.56	Peak	Horizontal
15.81	29.41	34.22	36.83	10.53	37.33	54.00	-16.67	Average	Horizontal
15.81	40.10	33.83	36.83	10.53	47.63	68.20	-20.57	Peak	Vertical
15.81	29.68	33.83	36.83	10.53	37.21	54.00	-16.79	Average	Vertical

Guangzhou LCS Compliance Testing Laboratory Ltd.

Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China

Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Channel 62 / 5310 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.93	40.24	34.22	36.83	10.53	48.16	68.20	-20.04	Peak	Horizontal
15.93	29.60	34.22	36.83	10.53	37.52	54.00	-16.48	Average	Horizontal
15.93	42.64	33.83	36.83	10.53	50.17	68.20	-18.03	Peak	Vertical
15.93	38.21	33.83	36.83	10.53	45.74	54.00	-8.26	Average	Vertical

*IEEE 802.11ac VHT80 MIMO**Channel 58 / 5290 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.87	47.91	34.22	36.83	10.53	55.83	68.20	-12.37	Peak	Horizontal
15.87	36.24	34.22	36.83	10.53	44.16	54.00	-9.84	Average	Horizontal
15.87	42.28	33.83	36.83	10.53	49.81	68.20	-18.39	Peak	Vertical
15.87	38.46	33.83	36.83	10.53	45.99	54.00	-8.01	Average	Vertical

*IEEE 802.11ax HEW80 MIMO**Channel 58 / 5290 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.87	47.34	34.22	36.83	10.53	55.26	68.20	-12.94	Peak	Horizontal
15.87	28.94	34.22	36.83	10.53	36.86	54.00	-17.14	Average	Horizontal
15.87	41.53	33.83	36.83	10.53	49.06	68.20	-19.14	Peak	Vertical
15.87	35.74	33.83	36.83	10.53	43.27	54.00	-10.73	Average	Vertical

*IEEE 802.11ac VHT160 MIMO**Channel 50 / 5250 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.87	42.20	34.22	36.83	10.53	50.12	68.20	-18.08	Peak	Horizontal
15.87	37.36	34.22	36.83	10.53	45.28	54.00	-8.72	Average	Horizontal
15.87	45.90	33.83	36.83	10.53	53.43	68.20	-14.77	Peak	Vertical
15.87	32.80	33.83	36.83	10.53	40.33	54.00	-13.67	Average	Vertical

*IEEE 802.11ax HEW160 MIMO**Channel 50 / 5250 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
15.87	40.59	34.22	36.83	10.53	48.51	68.20	-19.69	Peak	Horizontal
15.87	36.02	34.22	36.83	10.53	43.94	54.00	-10.06	Average	Horizontal
15.87	46.03	33.83	36.83	10.53	53.56	68.20	-14.64	Peak	Vertical
15.87	29.18	33.83	36.83	10.53	36.71	54.00	-17.29	Average	Vertical

UNII Band 2C*a mode-ant 1-the worst**Channel 100 / 5500 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.50	43.37	34.22	36.83	10.53	51.29	68.20	-16.91	Peak	Horizontal
16.50	32.22	34.22	36.83	10.53	40.14	54.00	-13.86	Average	Horizontal
16.50	49.39	33.83	36.83	10.53	56.92	68.20	-11.28	Peak	Vertical
16.50	36.20	33.83	36.83	10.53	43.73	54.00	-10.27	Average	Vertical

Channel 116 / 5580 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.74	42.44	34.22	36.83	10.53	50.36	68.20	-17.84	Peak	Horizontal
16.74	28.14	34.22	36.83	10.53	36.06	54.00	-17.94	Average	Horizontal
16.74	48.10	33.83	36.83	10.53	55.63	68.20	-12.57	Peak	Vertical
16.74	31.14	33.83	36.83	10.53	38.67	54.00	-15.33	Average	Vertical

Channel 140 / 5700 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.10	46.52	34.22	36.83	10.53	54.44	68.20	-13.76	Peak	Horizontal
17.10	31.84	34.22	36.83	10.53	39.76	54.00	-14.24	Average	Horizontal
17.10	40.04	33.83	36.83	10.53	47.57	68.20	-20.63	Peak	Vertical
17.10	36.98	33.83	36.83	10.53	44.51	54.00	-9.49	Average	Vertical

*IEEE 802.11n HT20 MIMO**Channel 100 / 5500 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.50	46.23	34.22	36.83	10.53	54.15	68.20	-14.05	Peak	Horizontal
16.50	36.75	34.22	36.83	10.53	44.67	54.00	-9.33	Average	Horizontal
16.50	44.58	33.83	36.83	10.53	52.11	68.20	-16.09	Peak	Vertical
16.50	34.29	33.83	36.83	10.53	41.82	54.00	-12.18	Average	Vertical

Channel 116 / 5580 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.74	41.93	34.22	36.83	10.53	49.85	68.20	-18.35	Peak	Horizontal
16.74	29.18	34.22	36.83	10.53	37.10	54.00	-16.90	Average	Horizontal
16.74	49.54	33.83	36.83	10.53	57.07	68.20	-11.13	Peak	Vertical
16.74	35.69	33.83	36.83	10.53	43.22	54.00	-10.78	Average	Vertical

Channel 140 / 5700 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.10	41.06	34.22	36.83	10.53	48.98	68.20	-19.22	Peak	Horizontal
17.10	30.82	34.22	36.83	10.53	38.74	54.00	-15.26	Average	Horizontal
17.10	49.01	33.83	36.83	10.53	56.54	68.20	-11.66	Peak	Vertical
17.10	34.47	33.83	36.83	10.53	42.00	54.00	-12.00	Average	Vertical

*IEEE 802.11ac VHT20 MIMO**Channel 100 / 5500 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.50	50.38	34.22	36.83	10.53	58.30	68.20	-9.90	Peak	Horizontal
16.50	31.16	34.22	36.83	10.53	39.08	54.00	-14.92	Average	Horizontal
16.50	40.89	33.83	36.83	10.53	48.42	68.20	-19.78	Peak	Vertical
16.50	32.25	33.83	36.83	10.53	39.78	54.00	-14.22	Average	Vertical

Channel 116 / 5580 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.74	42.18	34.22	36.83	10.53	50.10	68.20	-18.10	Peak	Horizontal
16.74	30.29	34.22	36.83	10.53	38.21	54.00	-15.79	Average	Horizontal
16.74	48.19	33.83	36.83	10.53	55.72	68.20	-12.48	Peak	Vertical
16.74	33.80	33.83	36.83	10.53	41.33	54.00	-12.67	Average	Vertical

Channel 140 / 5700 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.10	48.41	34.22	36.83	10.53	56.33	68.20	-11.87	Peak	Horizontal
17.10	38.54	34.22	36.83	10.53	46.46	54.00	-7.54	Average	Horizontal
17.10	42.85	33.83	36.83	10.53	50.38	68.20	-17.82	Peak	Vertical
17.10	36.82	33.83	36.83	10.53	44.35	54.00	-9.65	Average	Vertical

*IEEE 802.11ax HE20 MIMO**Channel 100 / 5500 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.50	49.45	34.22	36.83	10.53	57.37	68.20	-10.83	Peak	Horizontal
16.50	33.23	34.22	36.83	10.53	41.15	54.00	-12.85	Average	Horizontal
16.50	46.02	33.83	36.83	10.53	53.55	68.20	-14.65	Peak	Vertical
16.50	30.64	33.83	36.83	10.53	38.17	54.00	-15.83	Average	Vertical

Channel 116 / 5580 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.74	48.37	34.22	36.83	10.53	56.29	68.20	-11.91	Peak	Horizontal
16.74	37.16	34.22	36.83	10.53	45.08	54.00	-8.92	Average	Horizontal
16.74	45.16	33.83	36.83	10.53	52.69	68.20	-15.51	Peak	Vertical
16.74	30.67	33.83	36.83	10.53	38.20	54.00	-15.80	Average	Vertical

Channel 140 / 5700 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.10	43.46	34.22	36.83	10.53	51.38	68.20	-16.82	Peak	Horizontal
17.10	29.85	34.22	36.83	10.53	37.77	54.00	-16.23	Average	Horizontal
17.10	44.83	33.83	36.83	10.53	52.36	68.20	-15.84	Peak	Vertical
17.10	35.61	33.83	36.83	10.53	43.14	54.00	-10.86	Average	Vertical

*IEEE 802.11n HT40 MIMO**Channel 102 / 5510 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.53	40.05	34.22	36.83	10.53	47.97	68.20	-20.23	Peak	Horizontal
16.53	36.47	34.22	36.83	10.53	44.39	54.00	-9.61	Average	Horizontal
16.53	50.59	33.83	36.83	10.53	58.12	68.20	-10.08	Peak	Vertical
16.53	38.01	33.83	36.83	10.53	45.54	54.00	-8.46	Average	Vertical

Channel 110 / 5550 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.65	49.37	34.22	36.83	10.53	57.29	68.20	-10.91	Peak	Horizontal
16.65	28.54	34.22	36.83	10.53	36.46	54.00	-17.54	Average	Horizontal
16.65	41.22	33.83	36.83	10.53	48.75	68.20	-19.45	Peak	Vertical
16.65	28.53	33.83	36.83	10.53	36.06	54.00	-17.94	Average	Vertical

Channel 134 / 5670 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.01	43.25	34.22	36.83	10.53	51.17	68.20	-17.03	Peak	Horizontal
17.01	29.12	34.22	36.83	10.53	37.04	54.00	-16.96	Average	Horizontal
17.01	43.55	33.83	36.83	10.53	51.08	68.20	-17.12	Peak	Vertical
17.01	29.24	33.83	36.83	10.53	36.77	54.00	-17.23	Average	Vertical

*IEEE 802.11ac VHT40 MIMO**Channel 102 / 5510 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.53	45.16	34.22	36.83	10.53	53.08	68.20	-15.12	Peak	Horizontal
16.53	35.31	34.22	36.83	10.53	43.23	54.00	-10.77	Average	Horizontal
16.53	43.98	33.83	36.83	10.53	51.51	68.20	-16.69	Peak	Vertical
16.53	36.27	33.83	36.83	10.53	43.80	54.00	-10.20	Average	Vertical

Channel 110 / 5550 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.65	50.43	34.22	36.83	10.53	58.35	68.20	-9.85	Peak	Horizontal
16.65	28.04	34.22	36.83	10.53	35.96	54.00	-18.04	Average	Horizontal
16.65	46.75	33.83	36.83	10.53	54.28	68.20	-13.92	Peak	Vertical
16.65	38.81	33.83	36.83	10.53	46.34	54.00	-7.66	Average	Vertical

Channel 134 / 5670 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.01	48.70	34.22	36.83	10.53	56.62	68.20	-11.58	Peak	Horizontal
17.01	32.60	34.22	36.83	10.53	40.52	54.00	-13.48	Average	Horizontal
17.01	42.43	33.83	36.83	10.53	49.96	68.20	-18.24	Peak	Vertical
17.01	36.03	33.83	36.83	10.53	43.56	54.00	-10.44	Average	Vertical

*IEEE 802.11ax HE40 MIMO)**Channel 102 / 5510 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.53	40.60	34.22	36.83	10.53	48.52	68.20	-19.68	Peak	Horizontal
16.53	30.34	34.22	36.83	10.53	38.26	54.00	-15.74	Average	Horizontal
16.53	43.20	33.83	36.83	10.53	50.73	68.20	-17.47	Peak	Vertical
16.53	28.46	33.83	36.83	10.53	35.99	54.00	-18.01	Average	Vertical

Channel 110 / 5550 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.65	43.92	34.22	36.83	10.53	51.84	68.20	-16.36	Peak	Horizontal
16.65	34.90	34.22	36.83	10.53	42.82	54.00	-11.18	Average	Horizontal
16.65	46.95	33.83	36.83	10.53	54.48	68.20	-13.72	Peak	Vertical
16.65	36.68	33.83	36.83	10.53	44.21	54.00	-9.79	Average	Vertical

Channel 134 / 5670 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.01	47.33	34.22	36.83	10.53	55.25	68.20	-12.95	Peak	Horizontal
17.01	28.35	34.22	36.83	10.53	36.27	54.00	-17.73	Average	Horizontal
17.01	46.31	33.83	36.83	10.53	53.84	68.20	-14.36	Peak	Vertical
17.01	30.38	33.83	36.83	10.53	37.91	54.00	-16.09	Average	Vertical

*IEEE 802.11ac VHT80 MIMO**Channel 106 / 5530 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.59	48.12	34.22	36.83	10.53	56.04	68.20	-12.16	Peak	Horizontal
16.59	33.82	34.22	36.83	10.53	41.74	54.00	-12.26	Average	Horizontal
16.59	48.55	33.83	36.83	10.53	56.08	68.20	-12.12	Peak	Vertical
16.59	30.13	33.83	36.83	10.53	37.66	54.00	-16.34	Average	Vertical

Channel 122 / 5610 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.83	48.85	34.22	36.83	10.53	56.77	68.20	-11.43	Peak	Horizontal
16.83	37.51	34.22	36.83	10.53	45.43	54.00	-8.57	Average	Horizontal
16.83	46.07	33.83	36.83	10.53	53.60	68.20	-14.60	Peak	Vertical
16.83	32.88	33.83	36.83	10.53	40.41	54.00	-13.59	Average	Vertical

*IEEE 802.11ax HE80**Channel 106 / 5530 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.59	42.17	34.22	36.83	10.53	50.09	68.20	-18.11	Peak	Horizontal
16.59	38.43	34.22	36.83	10.53	46.35	54.00	-7.65	Average	Horizontal
16.59	41.90	33.83	36.83	10.53	49.43	68.20	-18.77	Peak	Vertical
16.59	34.75	33.83	36.83	10.53	42.28	54.00	-11.72	Average	Vertical

Channel 122 / 5610 MHz

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.83	45.95	34.22	36.83	10.53	53.87	68.20	-14.33	Peak	Horizontal
16.83	36.54	34.22	36.83	10.53	44.46	54.00	-9.54	Average	Horizontal
16.83	50.70	33.83	36.83	10.53	58.23	68.20	-9.97	Peak	Vertical
16.83	32.54	33.83	36.83	10.53	40.07	54.00	-13.93	Average	Vertical

*IEEE 802.11ac VHT160 MIMO**Channel 114 / 5570 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.59	44.48	34.22	36.83	10.53	52.40	68.20	-15.80	Peak	Horizontal
16.59	28.42	34.22	36.83	10.53	36.34	54.00	-17.66	Average	Horizontal
16.59	41.92	33.83	36.83	10.53	49.45	68.20	-18.75	Peak	Vertical
16.59	37.10	33.83	36.83	10.53	44.63	54.00	-9.37	Average	Vertical

*IEEE 802.11ax HE160 MIMO**Channel 114 / 5570 MHz*

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
16.59	47.80	34.22	36.83	10.53	55.72	68.20	-12.48	Peak	Horizontal
16.59	32.65	34.22	36.83	10.53	40.57	54.00	-13.43	Average	Horizontal
16.59	48.10	33.83	36.83	10.53	55.63	68.20	-12.57	Peak	Vertical
16.59	30.12	33.83	36.83	10.53	37.65	54.00	-16.35	Average	Vertical

Notes:

- 1). Measuring frequencies from 9 KHz ~ 40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz ~ 40GHz were made with an instrument using Peak detector mode.
- 3). 26~40GHz at least have 20dB margin. No recording in the test report.
- 4). Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5). $\text{Margin} = \text{Reading level} + \text{Factor} - \text{Limit}$
- 6). Pre-scan all modes and recorded the worst case results in this report IEEE 802.11ax HE20 MIMO mode (High Channel).

5.6. Power Line Conducted Emissions


5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

5.6.2 Block Diagram of Test Setup

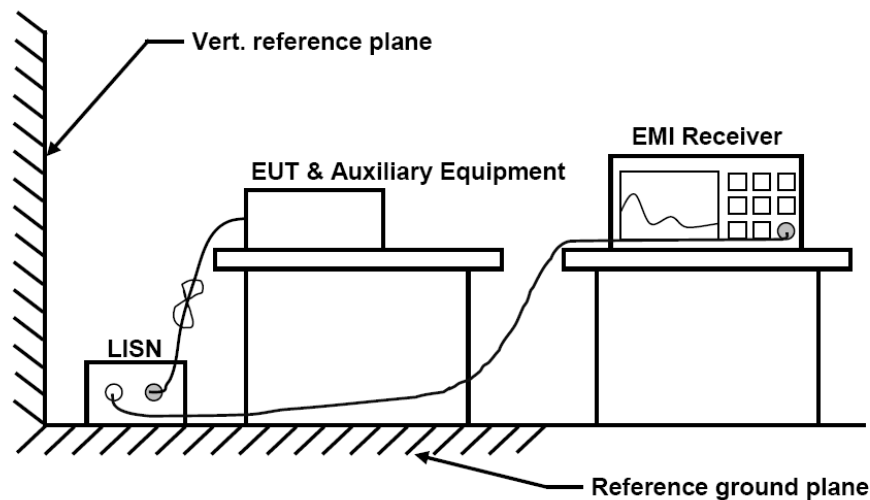

5.6.3 Disturbance Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dB}\mu\text{V)} = RA \text{ (dB}\mu\text{V)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

5.6.4 Test Results

Temperature	24.2°C	Humidity	55.1%
Test Engineer	Zhang hai	Configurations	IEEE 802.11a/n/ac/ax


PASS.

The test data please refer to following page.


AC Conducted Emission @ AC 120V/60Hz @ IEEE 802.11ax HE20 MIMO mode (High Channel)
(Ant1+Ant2+Ant3) (worst case)

5.3G

Line

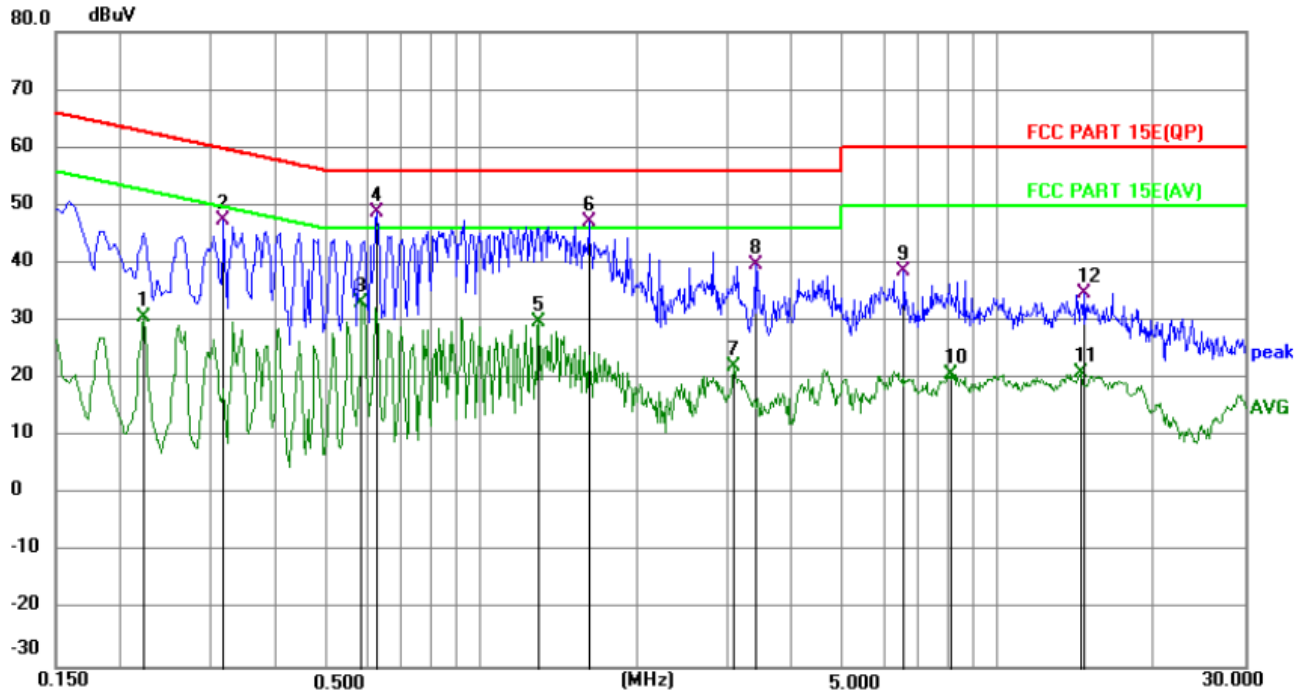


No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2220	20.61	10.10	30.71	52.74	-22.03	AVG	
2		0.3165	37.40	10.14	47.54	59.80	-12.26	QP	
3		0.5865	23.07	10.09	33.16	46.00	-12.84	AVG	
4	*	0.6270	38.63	10.10	48.73	56.00	-7.27	QP	
5		1.2930	19.68	10.23	29.91	46.00	-16.09	AVG	
6		1.6170	36.93	10.23	47.16	56.00	-8.84	QP	
7		3.0884	11.85	10.18	22.03	46.00	-23.97	AVG	
8		3.3854	29.42	10.17	39.59	56.00	-16.41	QP	
9		6.5625	28.24	10.29	38.53	60.00	-21.47	QP	
10		8.0970	10.53	10.32	20.85	50.00	-29.15	AVG	
11		14.4644	10.69	10.40	21.09	50.00	-28.91	AVG	
12		14.7390	24.48	10.40	34.88	60.00	-25.12	QP	

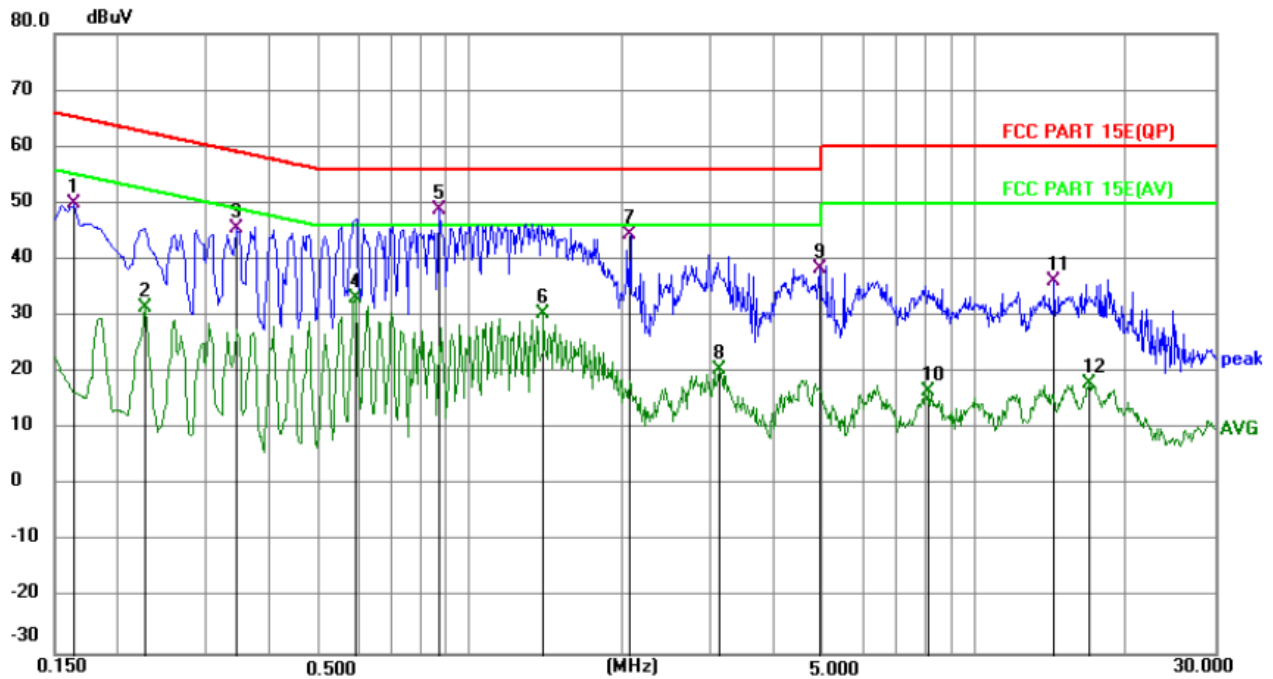Neutral


No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1635	39.67	10.10	49.77	65.28	-15.51	QP	
2		0.2265	21.31	10.12	31.43	52.58	-21.15	AVG	
3		0.3435	35.45	10.08	45.53	59.12	-13.59	QP	
4		0.5910	22.93	10.08	33.01	46.00	-12.99	AVG	
5	*	0.8700	38.80	10.10	48.90	56.00	-7.10	QP	
6		1.4010	20.14	10.19	30.33	46.00	-15.67	AVG	
7		2.0803	34.25	10.21	44.46	56.00	-11.54	QP	
8		3.1154	10.32	10.23	20.55	46.00	-25.45	AVG	
9		4.9515	28.15	10.23	38.38	56.00	-17.62	QP	
10		8.1195	6.26	10.24	16.50	50.00	-33.50	AVG	
11		14.4150	25.67	10.38	36.05	60.00	-23.95	QP	
12		16.9035	7.57	10.38	17.95	50.00	-32.05	AVG	

5.5G

Line

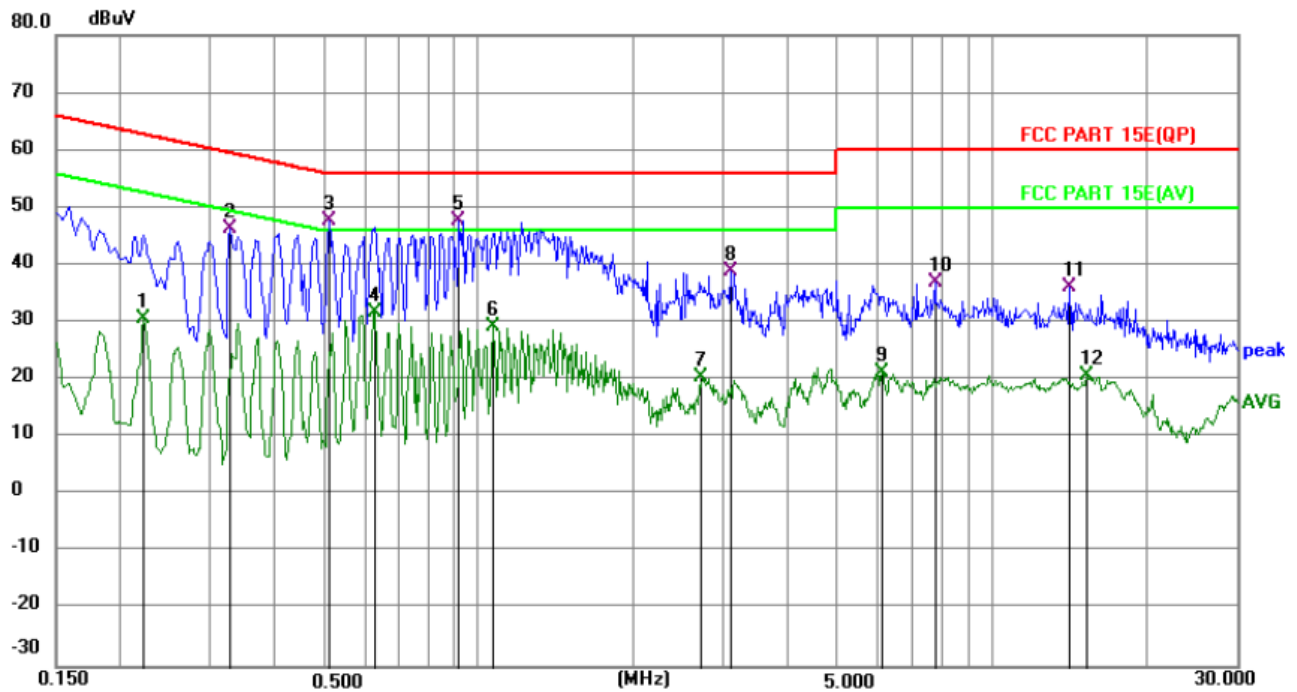

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2220	20.53	10.10	30.63	52.74	-22.11	AVG	
2	0.3255	36.07	10.12	46.19	59.57	-13.38	QP	
3 *	0.5100	37.70	10.07	47.77	56.00	-8.23	QP	
4	0.6270	21.61	10.10	31.71	46.00	-14.29	AVG	
5	0.9150	37.46	10.19	47.65	56.00	-8.35	QP	
6	1.0680	19.14	10.22	29.36	46.00	-16.64	AVG	
7	2.7239	10.35	10.21	20.56	46.00	-25.44	AVG	
8	3.1020	28.63	10.18	38.81	56.00	-17.19	QP	
9	6.0900	10.93	10.29	21.22	50.00	-28.78	AVG	
10	7.7504	26.58	10.31	36.89	60.00	-23.11	QP	
11	14.1675	25.85	10.40	36.25	60.00	-23.75	QP	
12	15.3734	10.42	10.40	20.82	50.00	-29.18	AVG	

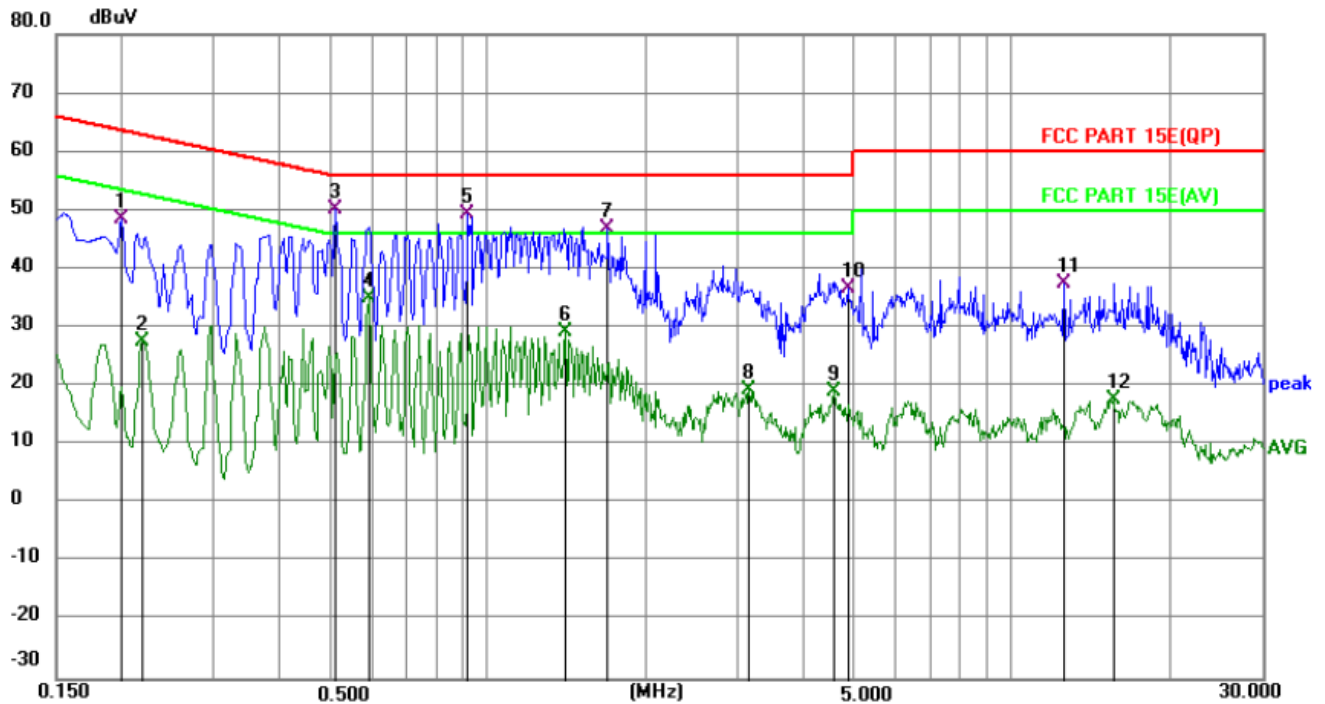Neutral

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1995	38.43	10.14	48.57	63.63	-15.06	QP	
2		0.2174	17.57	10.13	27.70	52.92	-25.22	AVG	
3	*	0.5100	39.96	10.07	50.03	56.00	-5.97	QP	
4		0.5910	24.90	10.08	34.98	46.00	-11.02	AVG	
5		0.9150	39.36	10.10	49.46	56.00	-6.54	QP	
6		1.4054	19.20	10.20	29.40	46.00	-16.60	AVG	
7		1.6980	36.65	10.21	46.86	56.00	-9.14	QP	
8		3.1425	9.03	10.23	19.26	46.00	-26.74	AVG	
9		4.5824	8.83	10.23	19.06	46.00	-26.94	AVG	
10		4.8570	26.57	10.23	36.80	56.00	-19.20	QP	
11		12.5655	27.22	10.34	37.56	60.00	-22.44	QP	
12		15.5534	7.33	10.39	17.72	50.00	-32.28	AVG	

***Note: Pre-scan all modes and recorded the worst case results in this report IEEE 802.11ax HE20 MIMO mode (High Channel) .

Measurement = Reading + Correct Factor, Margin = Measurement – Limit,

Correct Factor=Lisn Factor+Cable Factor+Insertion loss of Pulse Limiter.


5.7 Emissions in Restricted Bands

5.7.1 Limit

According to §15.407 (b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (a) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (b) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (c) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (d) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (e) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (f) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (g) The provisions of §15.205 apply to intentional radiators operating under this section.
- (h) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

5.7.2 Test Configuration

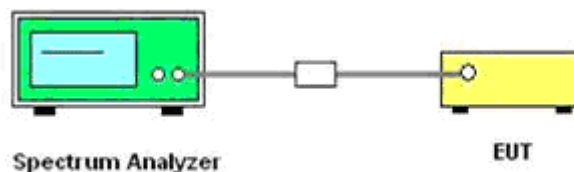

5.7.3 Test Procedure

According to KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section G: Unwanted Emission Measurement

1. Unwanted Emissions in the Restricted Bands

- a) For all measurements, follow the requirements in section II.G.3. "General Requirements for Unwanted Emissions Measurements."
- b) At frequencies below 1000 MHz, use the procedure described in section II.G.4. "Procedure for Unwanted Emissions Measurements below 1000 MHz."
- c) At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in sections II.G.5. and II.G.6, respectively, must satisfy the respective peak and average limits. If all peak measurements satisfy the average limit, then average measurements are not

required.

- d) For conducted measurements above 1000 MHz, EIRP shall be computed as specified in section II.G.3.b) and then field strength shall be computed as follows (see KDB Publication 412172):
 - i) $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and d = distance at which field strength limit is specified in the rules;
 - ii) $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters
 - e) For conducted measurements below 1000 MHz, the field strength shall be computed as specified in d), above, and then an additional 4.7 dB shall be added as an upper bound on the field strength that would be observed on a test range with a ground plane for frequencies between 30 MHz and 1000 MHz, or an additional 6 dB shall be added for frequencies below 30 MHz.
2. Unwanted Emissions that fall Outside of the Restricted Bands
- a) For all measurements, follow the requirements in section II.G.3. "General Requirements for Unwanted Emissions Measurements."
 - b) At frequencies below 1000 MHz, use the procedure described in section II.G.4. "Procedure for Unwanted Emissions Measurements below 1000 MHz."
 - c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in section II.G.5., "Procedure for Unwanted Maximum Unwanted Emissions Measurements Above 1000 MHz."
 - d) Section 15.407(b) (1-3) specifies the unwanted emissions limit for the U-NII-1 and 2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz dBm/MHz peak emission limit.
 - i) Section 15.407(b) (4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b) (4) (i). An alternative to the band emissions mask is specified in Section 15.407(b) (4) (ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.
 - e) If radiated measurements are performed, field strength is then converted to EIRP as follows:
 - i) $\text{EIRP} = ((E \times d)^2) / 30$
Where:
 - E is the field strength in V/m;
 - d is the measurement distance in meters;
 - EIRP is the equivalent isotopically radiated power in watts;
 - ii) Working in dB units, the above equation is equivalent to:
 $\text{EIRP} [\text{dBm}] = E [\text{dB}\mu\text{V/m}] + 20 \log(d [\text{meters}]) - 104.77$
 - iii) Or, if d is 3 meters:
 $\text{EIRP} [\text{dBm}] = E [\text{dB}\mu\text{V/m}] - 95.23$
- 3) Radiated versus Conducted Measurements.
- The unwanted emission limits in both the restricted and non-restricted bands are based on radiated measurements; however, as an alternative, antenna-port conducted measurements in conjunction with cabinet emissions tests will be permitted to demonstrate compliance provided that the following steps are performed:
- (i) Cabinet emissions measurements. A radiated test shall be performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna.
 - (ii) Impedance matching. Conducted tests shall be performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
 - (iii) EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.³ However, for devices that operate in multiple bands using the same transmit antenna, the highest gain of the antenna within the operating band nearest to the out-of-band frequency being measured may be used in lieu of the overall highest gain when measuring emissions at frequencies within 20% of the absolute frequency at the nearest edge of that band, but in no case shall a value less than 2 dBi be selected.
 - (iv) EIRP adjustments for multiple outputs. For devices with multiple outputs occupying the same or overlapping frequency ranges in the same band (e.g., MIMO or beamforming devices), compute the

total EIRP as follows:

- Compute EIRP for each output, as described in (iii), above.
 - Follow the procedures specified in KDB Publication 662911 for summing emissions across the outputs or adjusting emission levels measured on individual outputs by $10 \log(N_{\text{ANT}})$, where N_{ANT} is the number of outputs.
 - Add the array gain term specified in KDB Publication 662911 for out-of-band and spurious signals.
 - (v) Direction of maximum emission.
- For all radiated emissions tests, measurements shall correspond to the direction of maximum emission level for each measured emission (see ANSI C63.10 for guidance).

5.7.4 Test Results

PASS

*Please refer to Appendix C.54 & Appendix D.4
Please refer to below for Radiated*

Remark:

1. *Measured Undesirable emission at difference data rate for each mode and recorded worst case for each mode;*
2. *Test results including cable loss;*
3. *Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20, IEEE 802.11ax HE20, IEEE 802.11ac VHT40, IEEE 802.11ax HE40, IEEE 802.11ac VHT80, IEEE 802.11ax HE80, IEEE 802.11ac VHT160, IEEE 802.11ax HE160;*
4. *Covert Radiated E Level At 3m = Conducted average power + Directional Gain + $104.77 - 20 \cdot \log(3)$;*

PASS


Please refer to Appendix A.7

Remark:

- 1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 6.5Mbps at IEEE 802.11ax HE20; 13.5Mbps at IEEE 802.11ax HE40; 6.5Mbps at IEEE 802.11be EHT20; 13.5Mbps at IEEE 802.11be EHT40.
- 4). "—"means that the fundamental frequency not for 15.209 limits requirement.

3046019EC

Horizontal

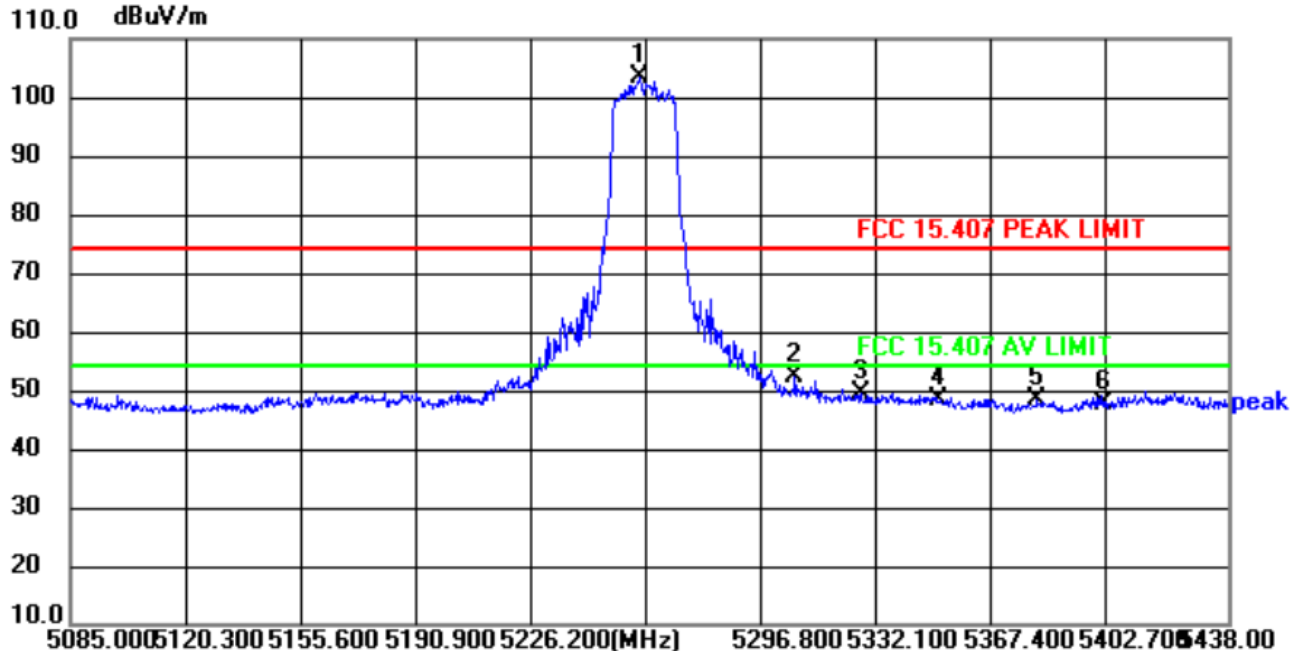

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
-----	-----	-------	---------------	----------------	-------------	-------	------


5.7.5 Test Results

PASS

Please refer to Appendix A.7


Remark:

- 1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 6.5Mbps at IEEE 802.11ax HE20; 13.5Mbps at IEEE 802.11ax HE40; 6.5Mbps at IEEE 802.11be EHT20; 13.5Mbps at IEEE 802.11be EHT40.
- 4). "—"means that the fundamental frequency not for 15.209 limits requirement.

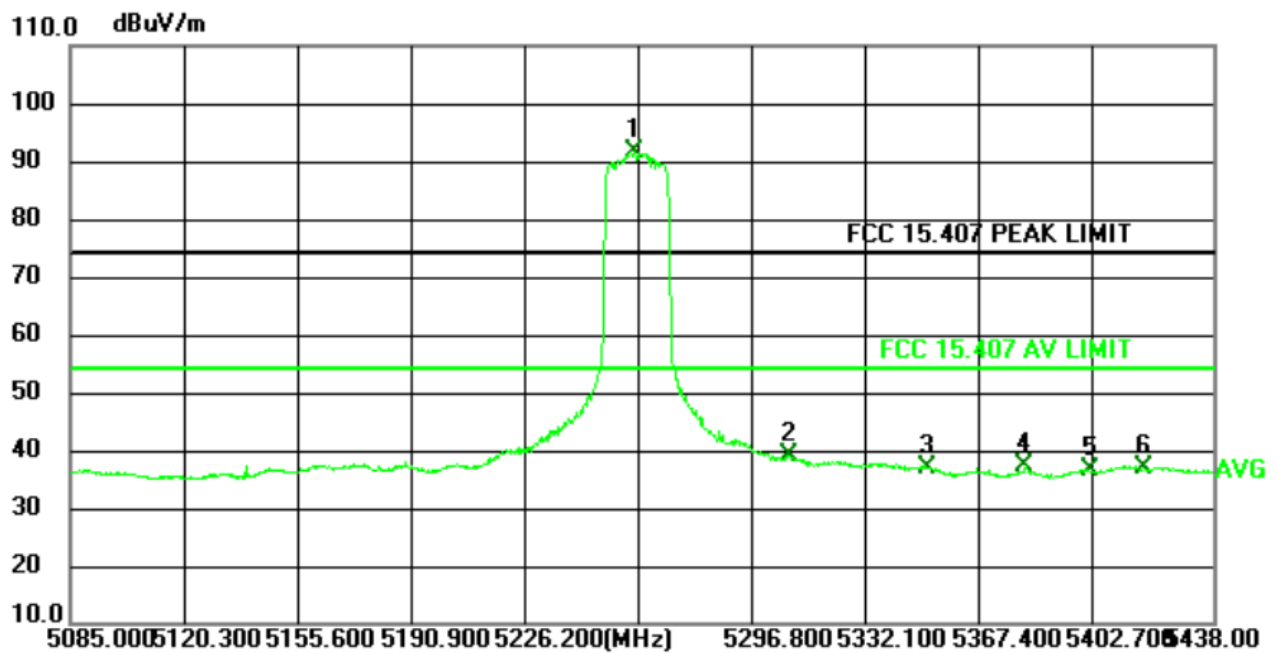


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5259.029	83.81	7.92	91.73	54.00	37.73	AVG	
2		5307.037	30.71	8.22	38.93	54.00	-15.07	AVG	
3		5350.000	28.57	8.48	37.05	54.00	-16.95	AVG	
4		5380.000	28.53	8.67	37.20	54.00	-16.80	AVG	
5		5400.000	27.77	8.79	36.56	54.00	-17.44	AVG	
6		5416.820	28.07	8.90	36.97	54.00	-17.03	AVG	

Vertical

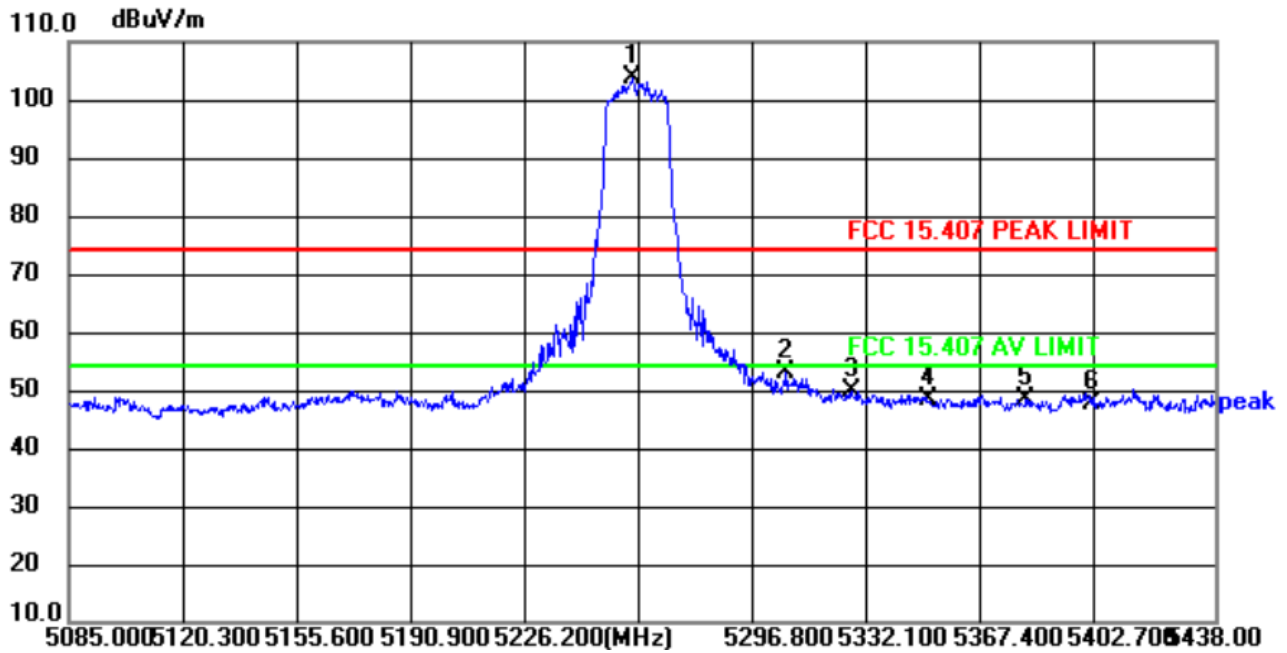

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5258.676	95.86	7.92	103.78	74.00	29.78	peak	
2		5305.978	44.99	8.21	53.20	74.00	-20.80	peak	
3		5326.099	41.46	8.34	49.80	74.00	-24.20	peak	
4		5350.000	39.89	8.48	48.37	74.00	-25.63	peak	
5		5380.000	39.68	8.67	48.35	74.00	-25.65	peak	
6		5400.000	38.98	8.79	47.77	74.00	-26.23	peak	

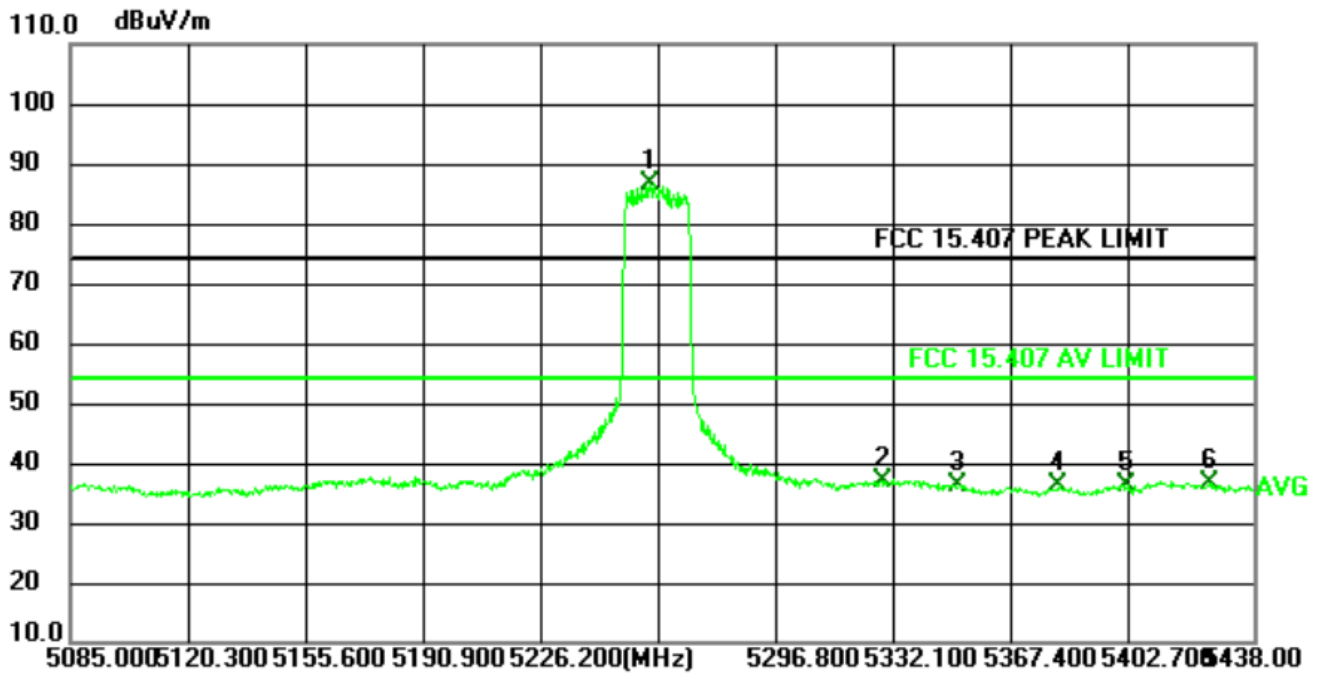


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5257.970	78.54	8.02	86.56	54.00	32.56	AVG	
2		5327.158	28.68	8.44	37.12	54.00	-16.88	AVG	
3		5350.000	27.83	8.58	36.41	54.00	-17.59	AVG	
4		5380.000	27.59	8.77	36.36	54.00	-17.64	AVG	
5		5400.000	27.23	8.89	36.12	54.00	-17.88	AVG	
6		5424.939	27.59	9.04	36.63	54.00	-17.37	AVG	

Remark:


- 1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.
- 2). Test results including cable loss;
- 3). Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 6.5Mbps at IEEE 802.11ax HE20; 13.5Mbps at IEEE 802.11ax HE40; 6.5Mbps at IEEE 802.11be EHT20; 13.5Mbps at IEEE 802.11be EHT40.
- 4). "—" means that the fundamental frequency not for 15.209 limits requirement.

3046019EC

Horizontal

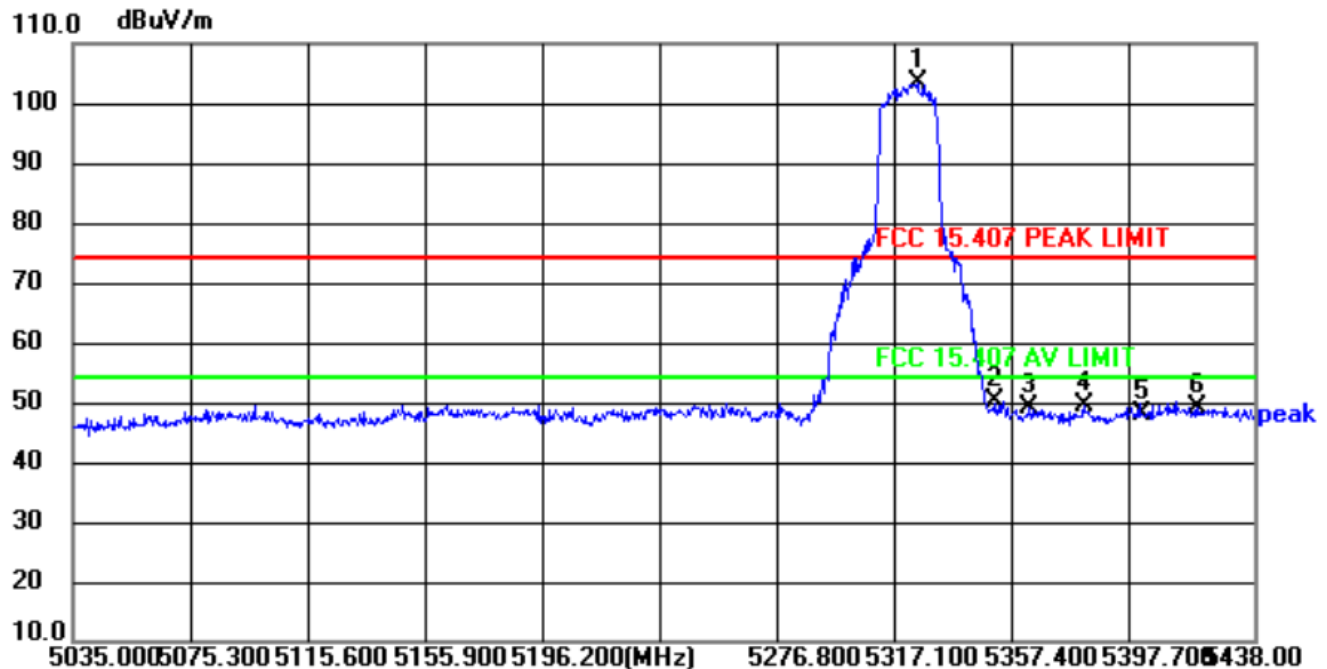


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5323.145	94.90	8.32	103.22	74.00	29.22	peak	
2		5350.000	41.55	8.48	50.03	74.00	-23.97	peak	
3		5361.430	40.58	8.55	49.13	74.00	-24.87	peak	
4		5380.000	40.79	8.67	49.46	74.00	-24.54	peak	
5		5400.000	39.39	8.79	48.18	74.00	-25.82	peak	
6		5419.059	40.19	8.91	49.10	74.00	-24.90	peak	

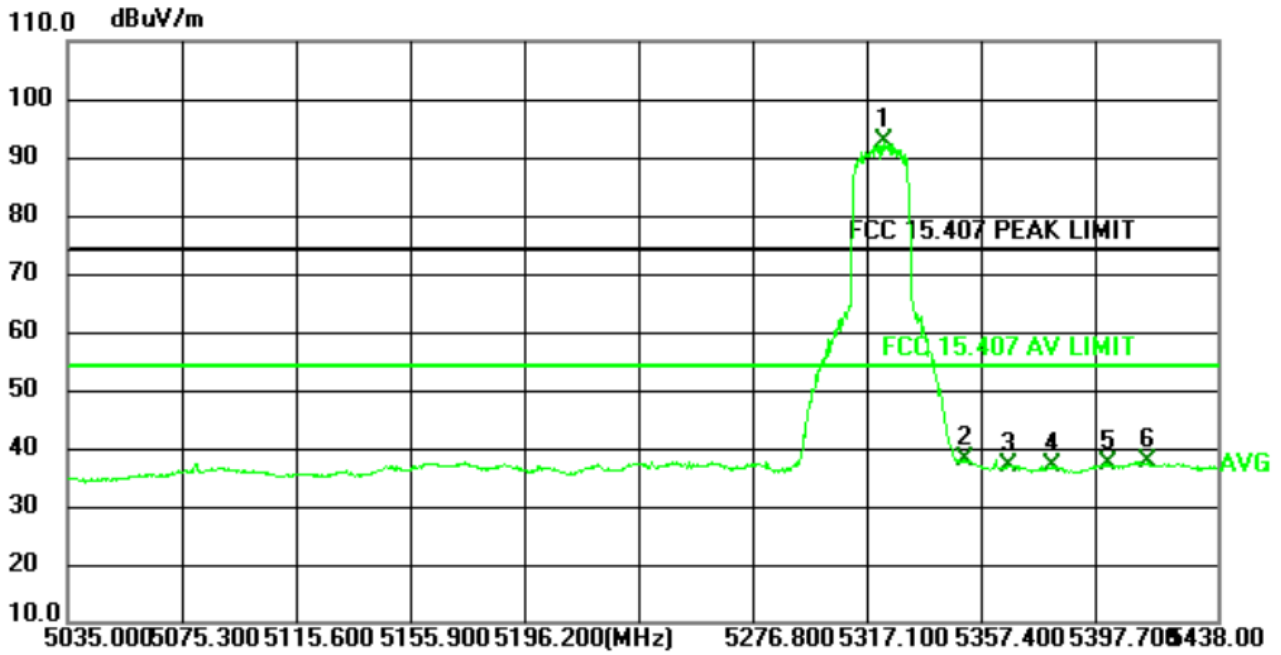


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5321.533	84.47	8.30	92.77	54.00	38.77	AVG	
2		5350.000	29.59	8.48	38.07	54.00	-15.93	AVG	
3		5365.057	28.54	8.58	37.12	54.00	-16.88	AVG	
4		5380.000	28.17	8.67	36.84	54.00	-17.16	AVG	
5		5400.000	28.62	8.79	37.41	54.00	-16.59	AVG	
6		5413.820	28.67	8.88	37.55	54.00	-16.45	AVG	

Vertical

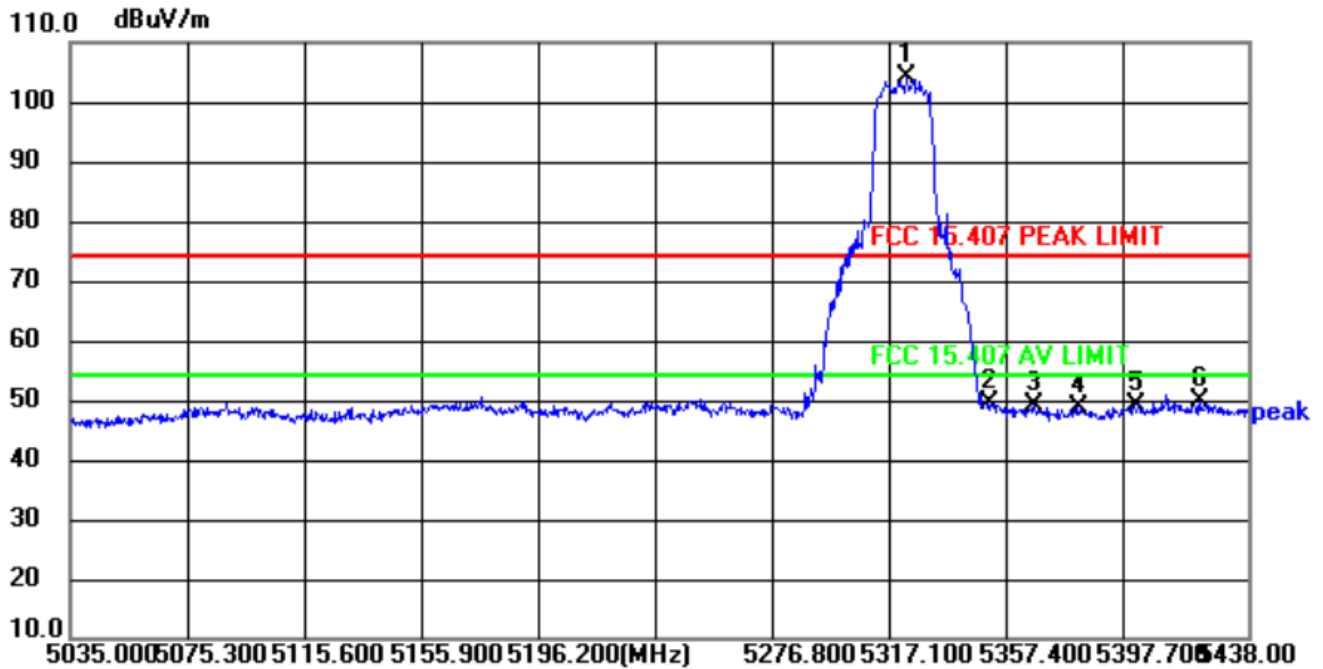

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5321.533	95.57	8.40	103.97	74.00	29.97	peak	
2		5350.000	40.81	8.58	49.39	74.00	-24.61	peak	
3		5365.057	40.30	8.67	48.97	74.00	-25.03	peak	
4		5380.000	39.96	8.77	48.73	74.00	-25.27	peak	
5		5400.000	40.04	8.89	48.93	74.00	-25.07	peak	
6		5421.477	40.94	9.02	49.96	74.00	-24.04	peak	

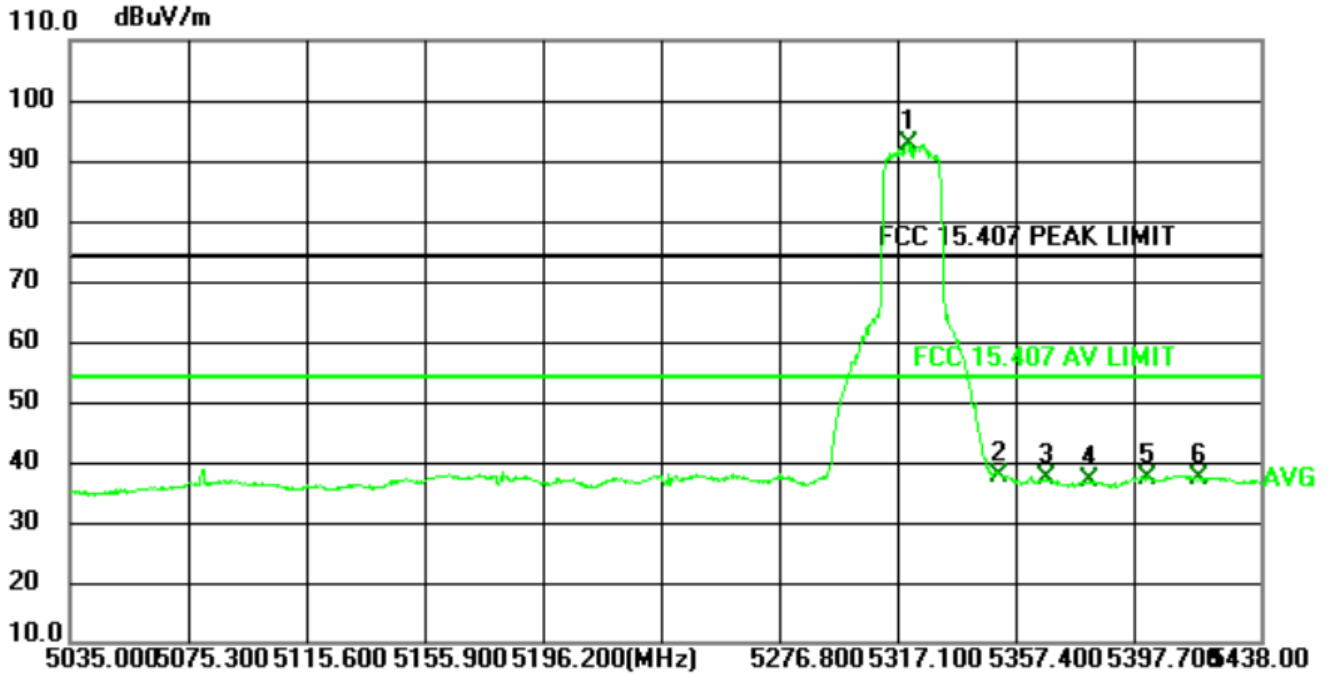

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5319.518	84.31	8.40	92.71	54.00	38.71	AVG	
2		5350.000	29.27	8.58	37.85	54.00	-16.15	AVG	
3		5365.863	28.49	8.68	37.17	54.00	-16.83	AVG	
4		5380.000	28.03	8.77	36.80	54.00	-17.20	AVG	
5		5400.000	28.56	8.89	37.45	54.00	-16.55	AVG	
6		5417.044	28.47	9.00	37.47	54.00	-16.53	AVG	

Remark:

1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.


2). Test results including cable loss;

3046019EC

3). Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 6.5Mbps at IEEE 802.11ax HE20; 13.5Mbps at IEEE 802.11ax HE40; 6.5Mbps at IEEE 802.11be EHT20; 13.5Mbps at IEEE 802.11be EHT40.

4). "—"means that the fundamental frequency not for 15.209 limits requirement.

Horizontal

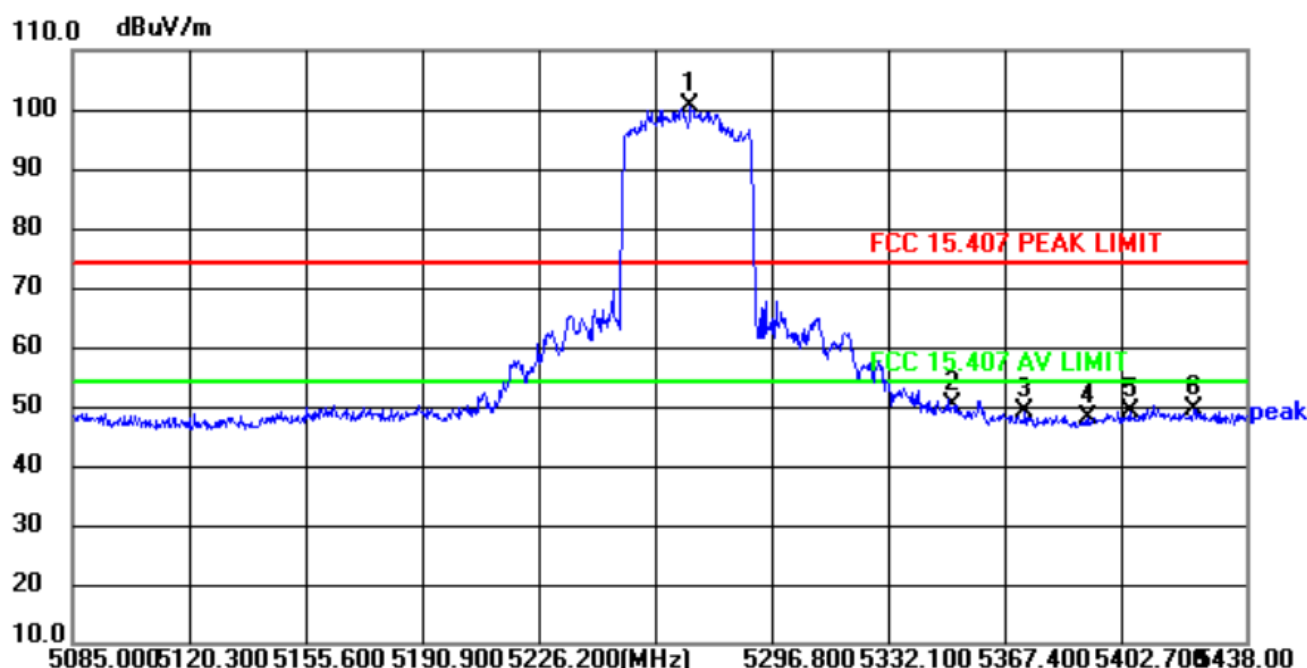

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
-----	-----	-------	---------------	----------------	-------------	-------	------

5.7.5 Test Results

PASS

Please refer to Appendix A.7

Remark:

1). Measured Band edge measurement for radiated emission at difference data rate for each mode and recorded worst case for each mode.

2). Test results including cable loss;

3). Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 6.5Mbps at IEEE 802.11ax HE20; 13.5Mbps at IEEE 802.11ax HE40; 6.5Mbps at IEEE 802.11be EHT20; 13.5Mbps at IEEE 802.11be EHT40.

4). "—"means that the fundamental frequency not for 15.209 limits requirement.