

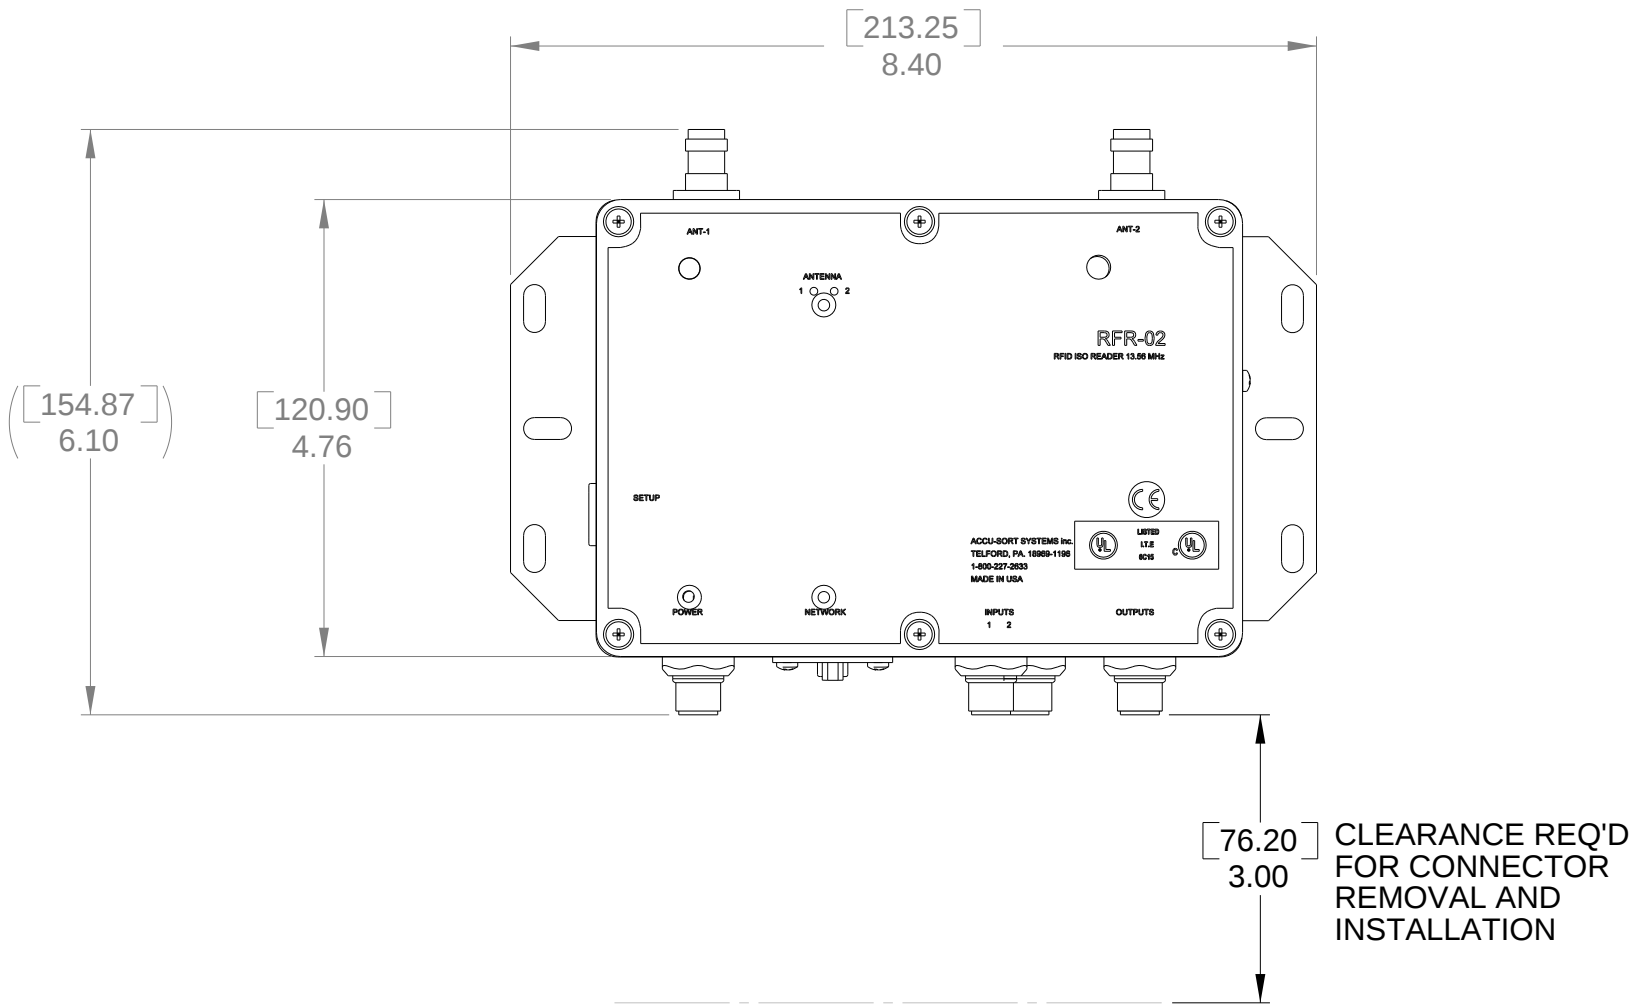
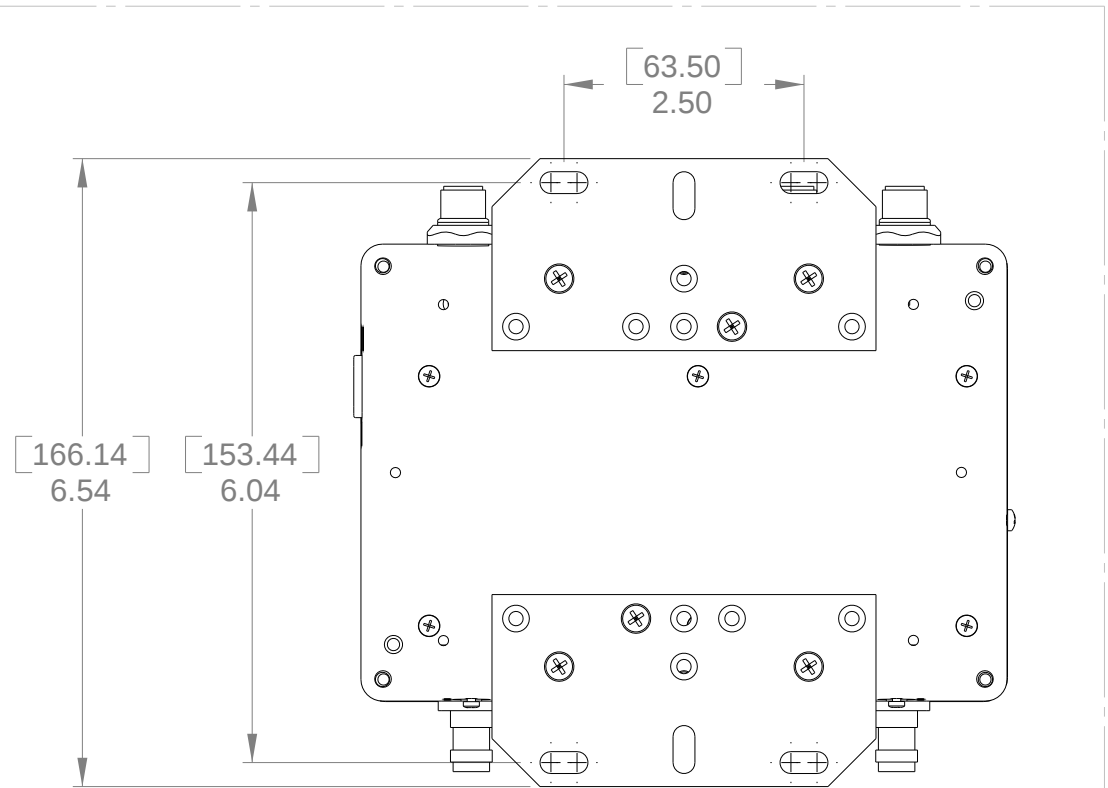
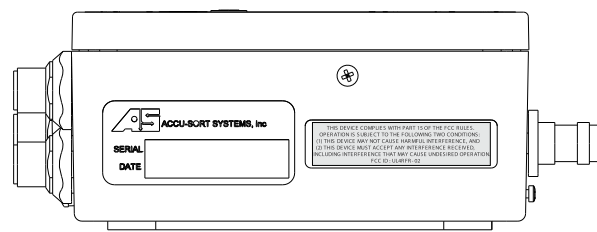


NOTES:
1. UNIT WEIGHT: 2.3 LBS
2. POWER: SEE TABLE 1.
3. ENVIRONMENT:
OPERATING: 32-122 DEG F, 10-90% RH, NON-CONDENSING
STORAGE: 14-140 DEG F, 10-90% RH, NON-CONDENSING


REVISION			
REV	ECO	BY	DATE
2	ECO 06-914	CDG/TCS	10.05.05

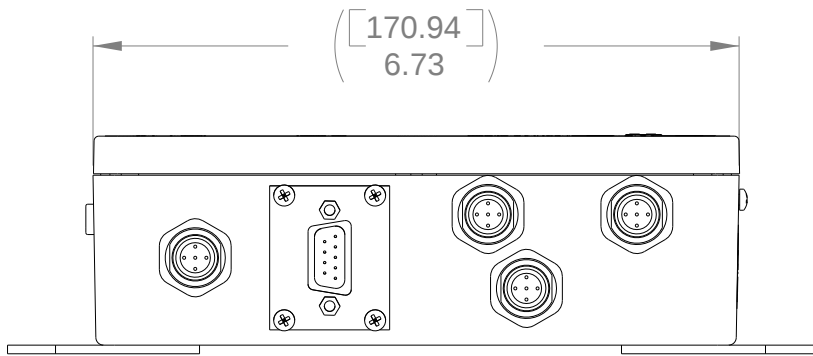

CLEARANCE REQ'D
FOR CONNECTOR
REMOVAL AND
INSTALLATION

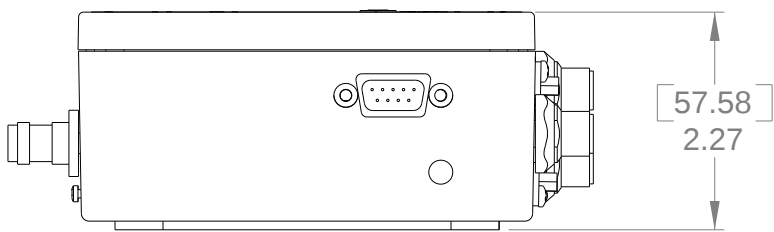

ALTERNATE MOUNTING
USE 4X #10-32 OR M6
FASTENERS TO MOUNT

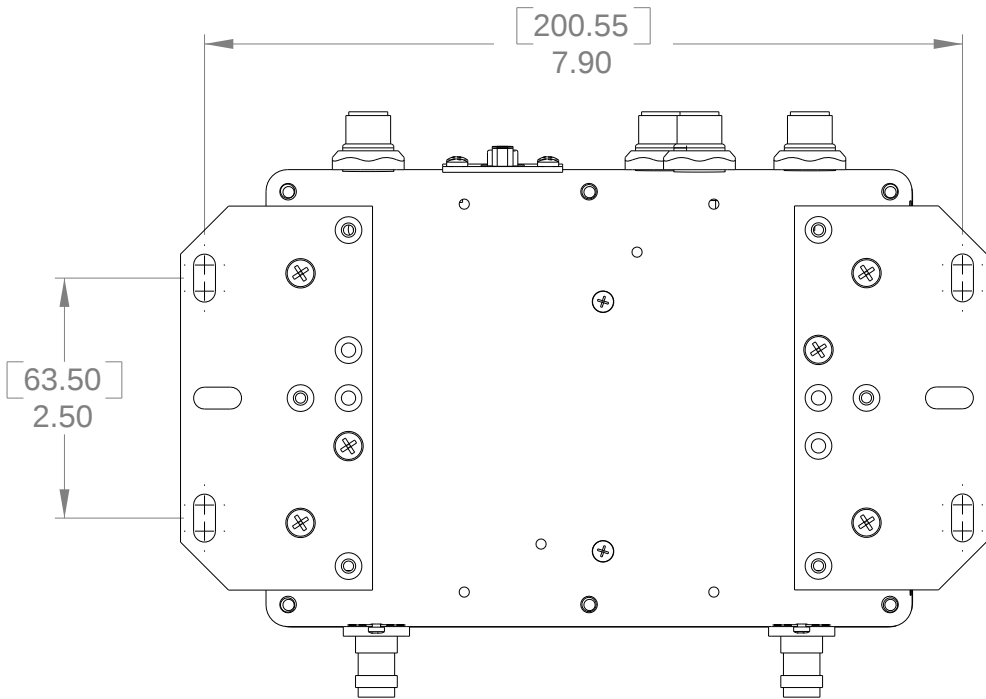

STANDARD MOUNTING
USE 4X #10-32 OR M6
FASTENERS TO MOUNT

TABLE 1			
PART NUMBER	POWER INPUT	ANT 1 ACTIVE	ANT 2 ACTIVE
1000053245	10-30VDC		
	28 VDC	120MA	150MA
	24 VDC	140MA	170MA
	12 VDC	240MA	300MA
1000052365	12VDC	190MA	240MA

PART NO. 0106103000

THIS IS NOT A CONTROLLED COPY UNLESS
STAMPED "CONTROLLED COPY" IN RED

THIS DOCUMENT IS PROVIDED FOR A
SPECIFIC PURPOSE AND THE DISCLOSED
INFORMATION REMAINS OUR PROPERTY.
IT MAY NOT BE DISCLOSED, COPIED,
OR REPRODUCED, EXCEPT FOR THE
SPECIFIC PURPOSE, WITHOUT ACCU-SORT'S
PRIOR APPROVAL. THIS NOTICE MUST
APPEAR ON ANY COPY OR REPRODUCTION
OF THIS DOCUMENT.
© 2004, ACCU-SORT SYSTEMS, INC.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES [MILLIMETERS]
ALL ANGLES ARE 90°
ALL C-CINKS ARE 82°
ALL BEND RELIEFS TO SUIT
TOLERANCES:
INCH [METRIC]
.X01000 [X02.500]
.XX00200 [XX00.500]
.XXX00050 [XXX00.130]
.XXXX00005 [XXXX00.013]
FRACTIONS 01/4
FT., IN 01"
REMOVE SHARP EDGES AND BURRS



DRAWN TWJ DATE 10.21.03
CHKD RH DATE 10.21.03
ENGR RH DATE 10.21.03
DEPT. MECH ENG
E- N/A
CUSTOMER N/A
CONTRACT # N/A



ACCU-SORT® SYSTEMS, inc.
TELFORD, PA 18969 USA

MECHANICAL SPECIFICATION
RFR-02 - RFID

SIZE C CAGE CODE 53830 DWG. NO. 106103
SCALE NONE CAD SYS. SOLIDWORKS SHEET 1 OF 1