

Measurement Results

No.1-3180/21-01-02_Annex_OBW_PSD

Test logging

This document is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Test/s performed:

Thomas Vogler
Lab Manager
Radio Labs

Meheza Walla
Lab Manager
Radio Labs

Table of Content

EUT Information	3
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	4
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	7
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	10
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	13
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	16
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	19
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	22
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	25
Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz	28
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	31
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	34
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	37
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	40
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	43
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	46
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	49
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	52
Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz	55
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	58
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	61
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	64
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	67
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	70
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	73
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	76
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	79
Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz	82

EUT Information

EUT DEFINITION

Manufacturer	ifm electronic gmbh
Type	R1D200 (TR23)
Serial Number	000000000097
Setup Number	1.0
Version SW	NI
Version FW	NI
Version HW	NI
Comment 1	
Comment 2	
Temperature [°C] Min	-40
Temperature [°C] Nom	20
Temperature [°C] Max	85
Voltage [V] Min	10
Voltage [V] Nom	24
Voltage [V] Max	30

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	07.03.2023 17:14:47
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	nom
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

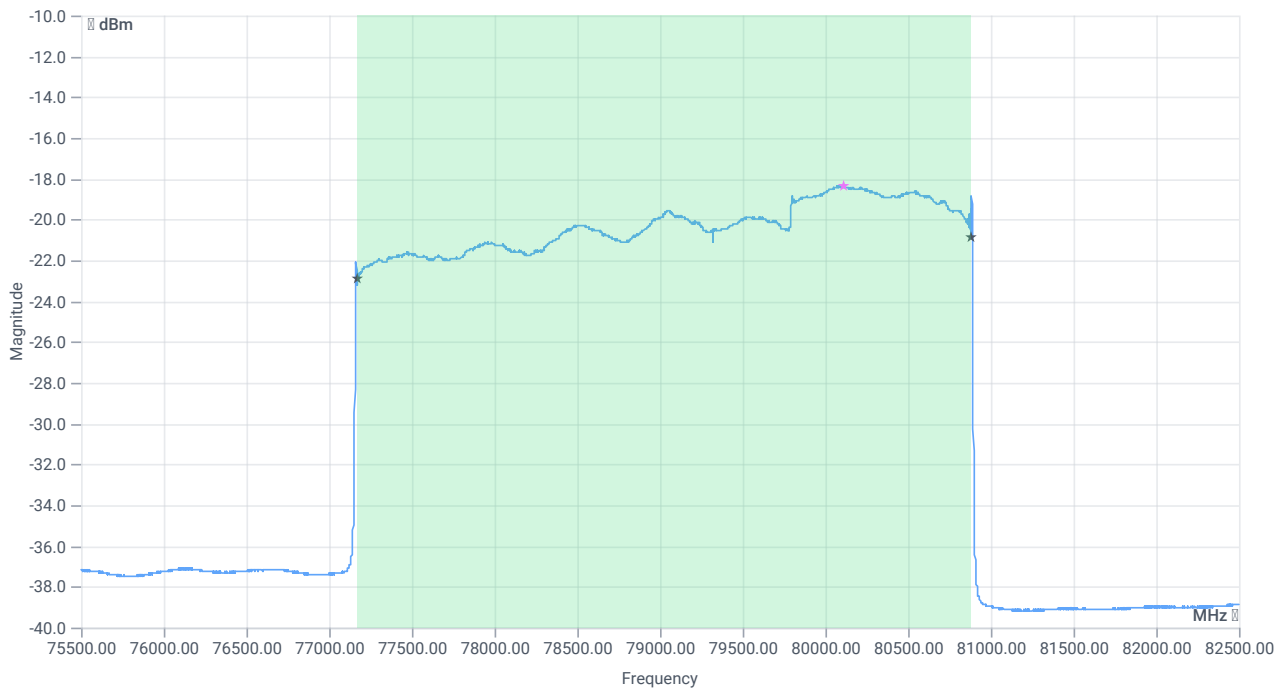

BW 99PCT

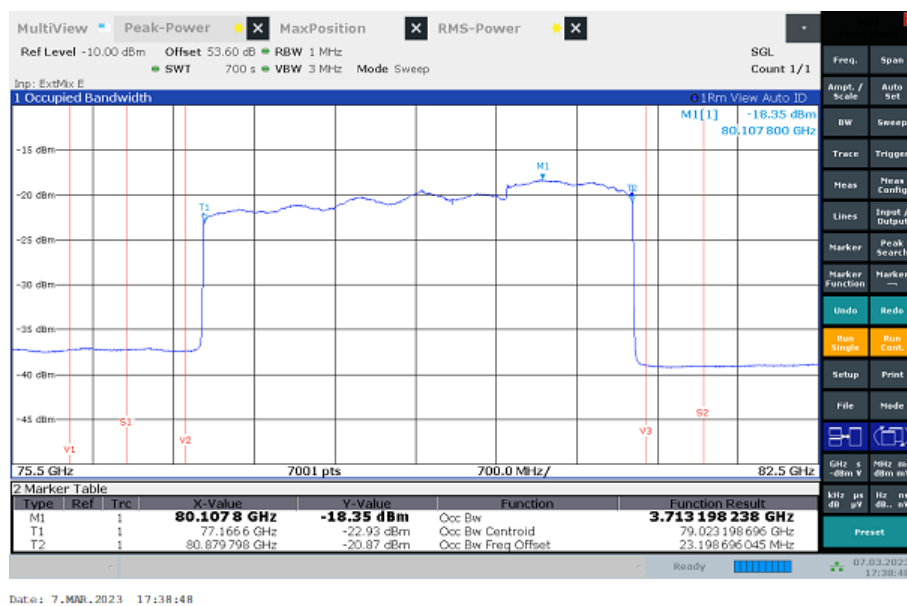

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

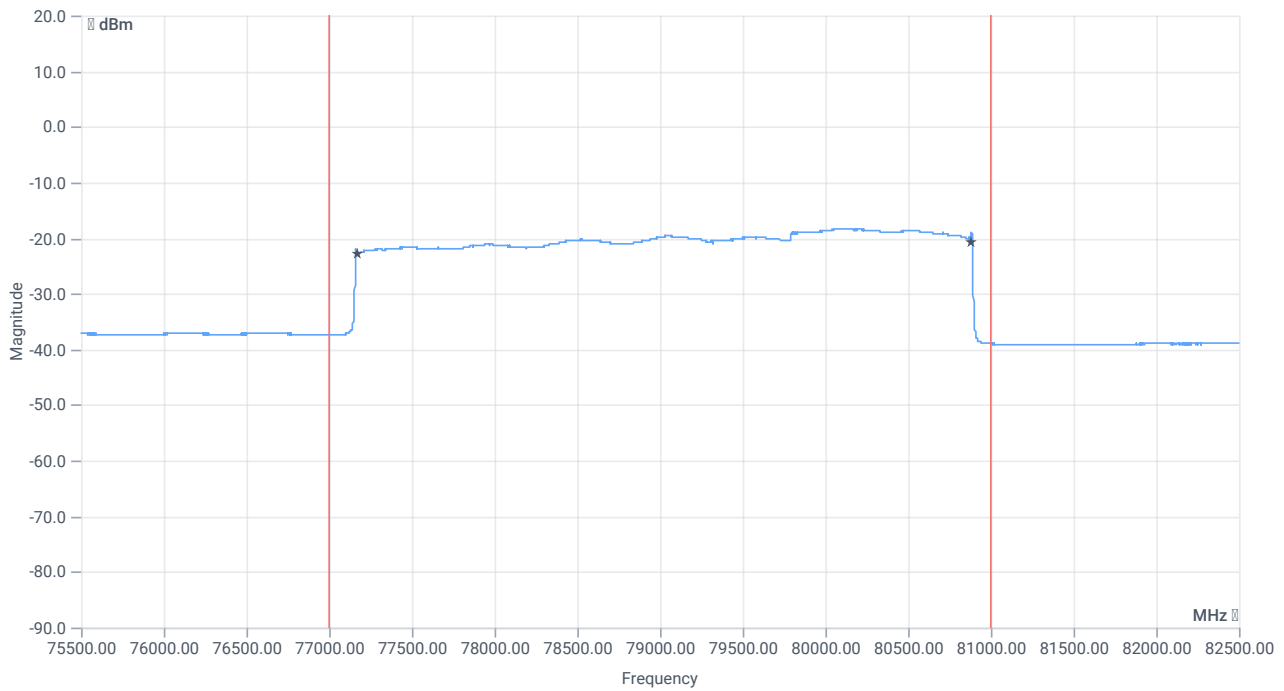

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3713.20	MHz	INFO
T1 99%	77000.00	---	77166.60	MHz	PASS
T2 99%	---	81000.00	80879.80	MHz	PASS
Max value @ 80107.8 MHz	---	---	-18.35	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	07.03.2023 17:42:48
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	nom
Voltage	min
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

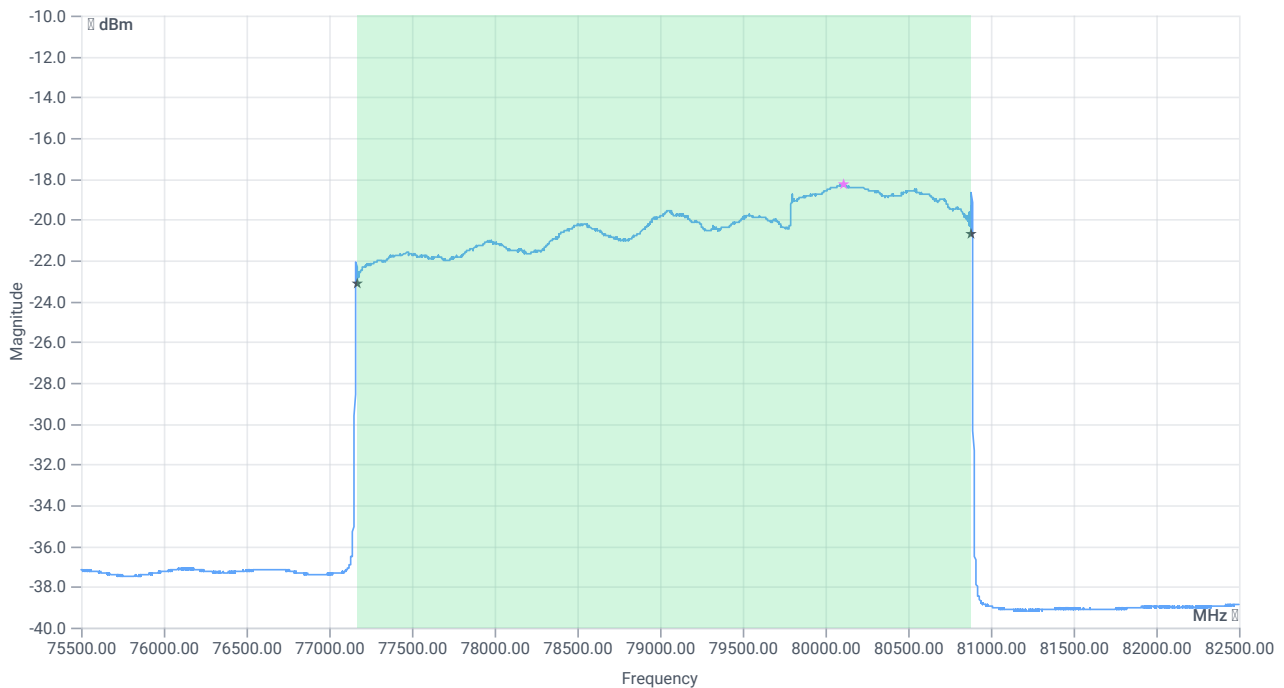

BW 99PCT

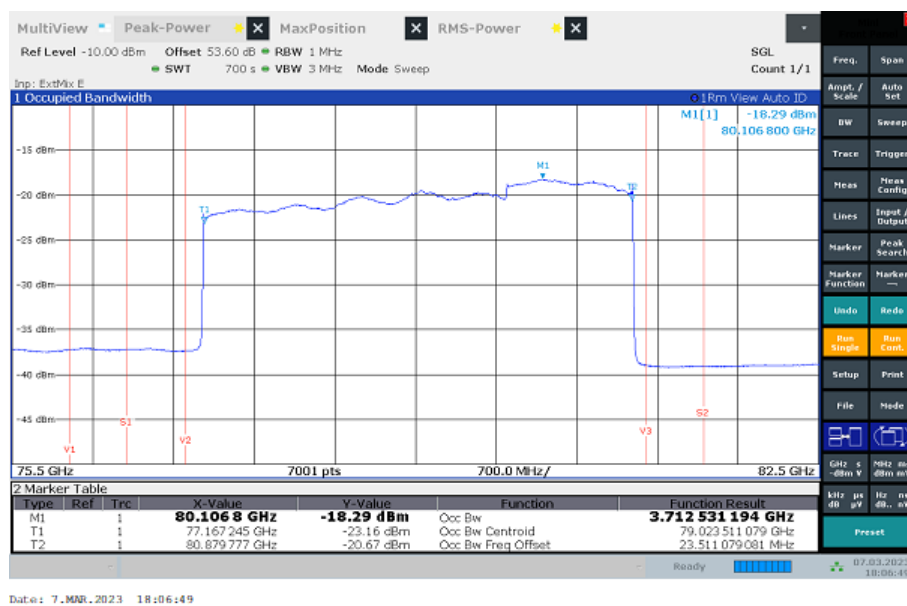

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

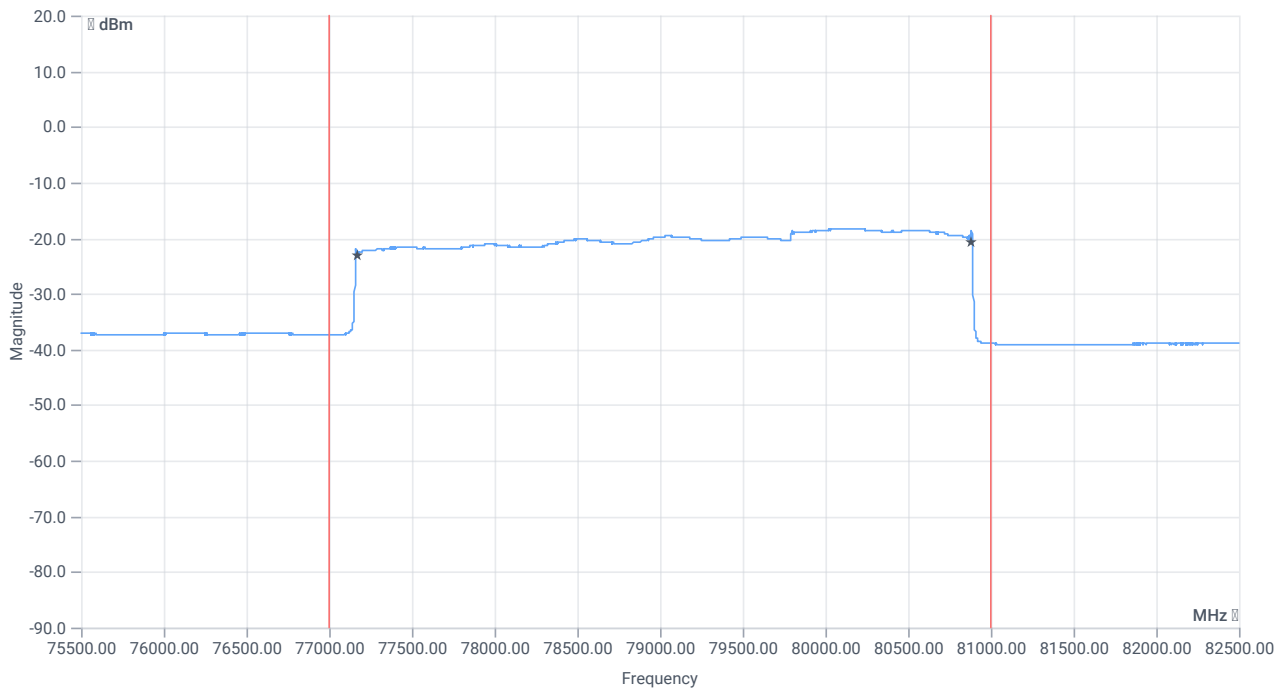

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3712.53	MHz	INFO
T1 99%	77000.00	---	77167.25	MHz	PASS
T2 99%	---	81000.00	80879.78	MHz	PASS
Max value @ 80106.8 MHz	---	---	-18.29	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	07.03.2023 18:10:50
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	nom
Voltage	max
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

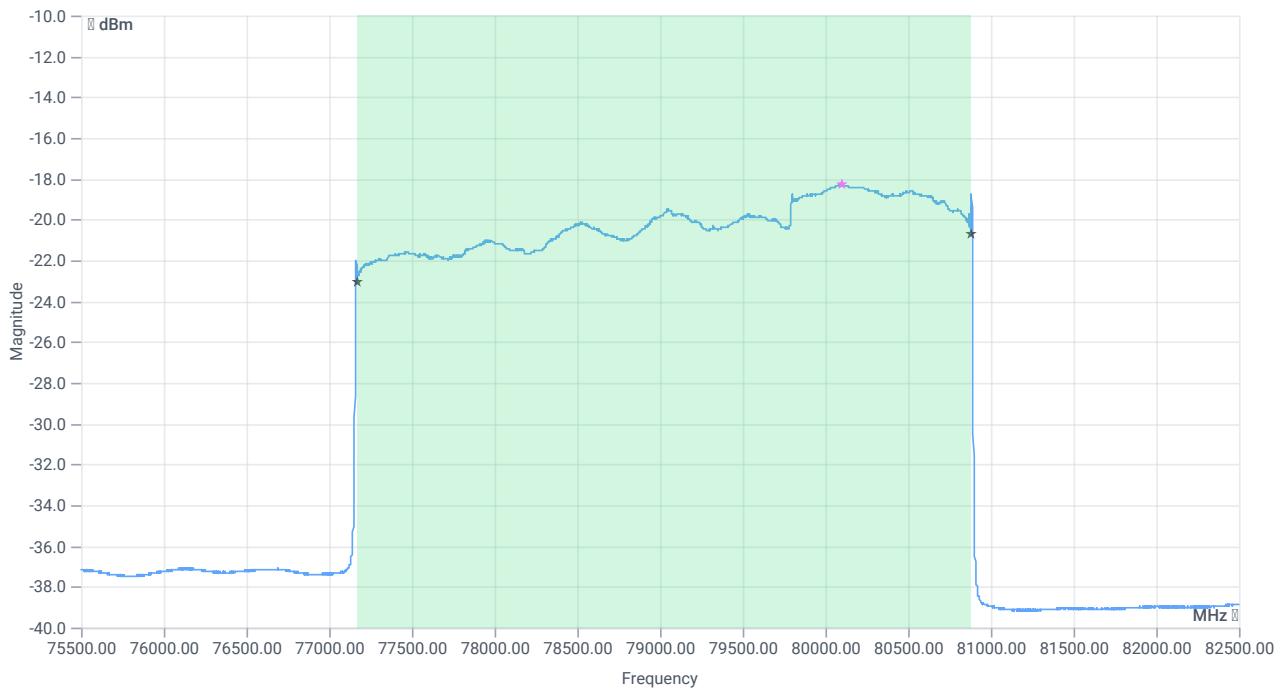

BW 99PCT

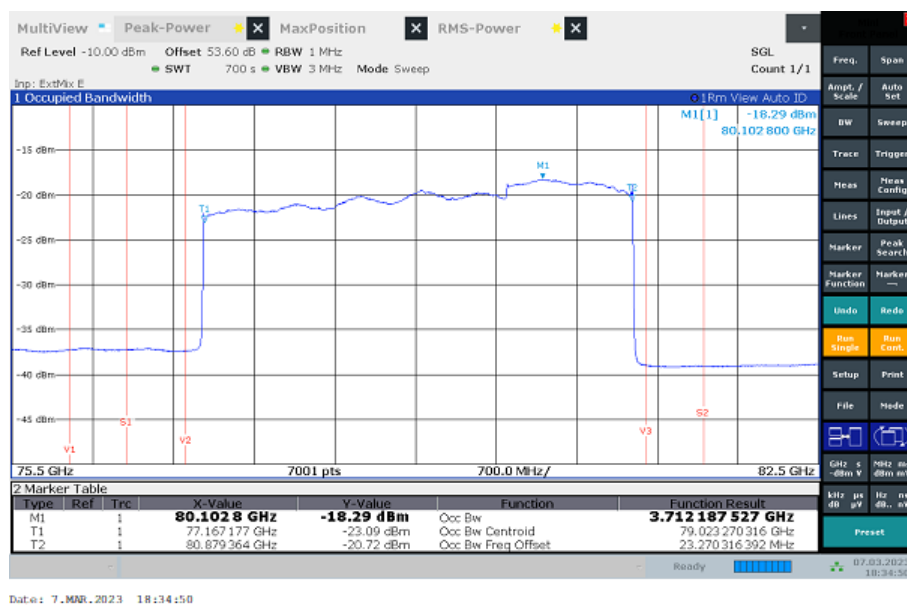

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

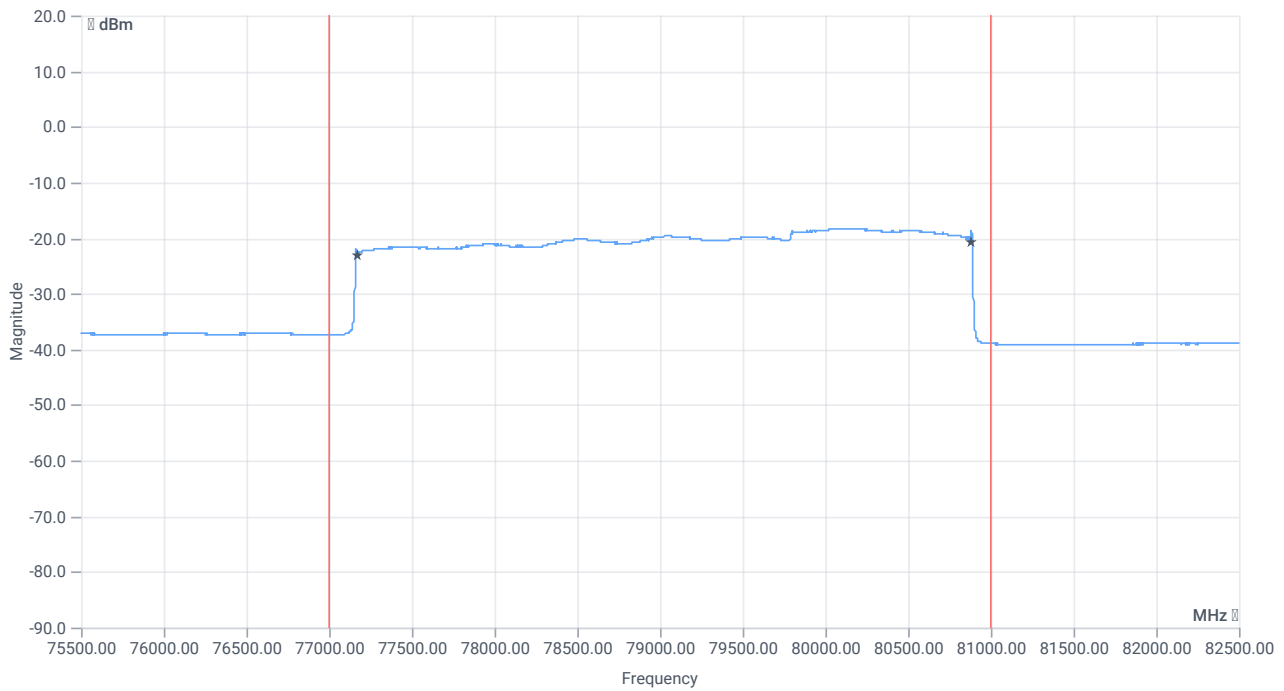

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3712.19	MHz	INFO
T1 99%	77000.00	---	77167.18	MHz	PASS
T2 99%	---	81000.00	80879.36	MHz	PASS
Max value @ 80102.8 MHz	---	---	-18.29	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	07.03.2023 19:27:09
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	min
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment

Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

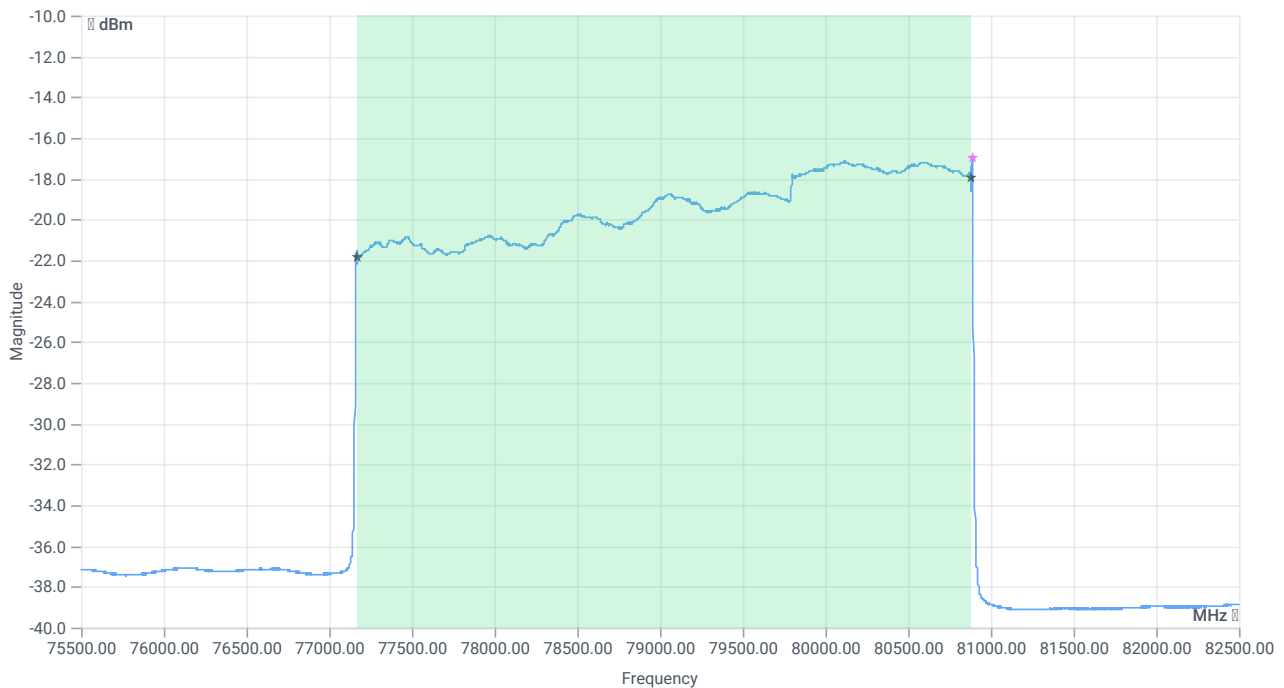

BW 99PCT



Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

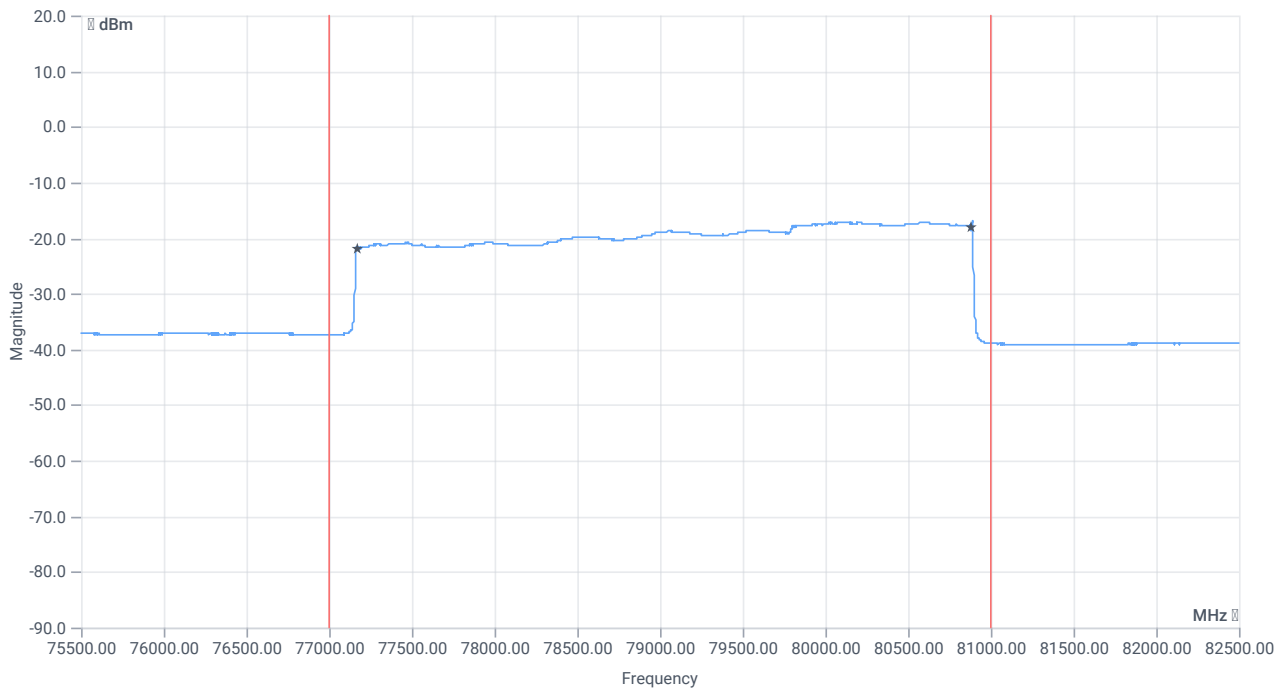

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3709.30	MHz	INFO
T1 99%	77000.00	---	77173.88	MHz	PASS
T2 99%	---	81000.00	80883.18	MHz	PASS
Max value @ 80885.7 MHz	---	---	-17.00	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	07.03.2023 20:41:53
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	min
Voltage	min
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment

Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

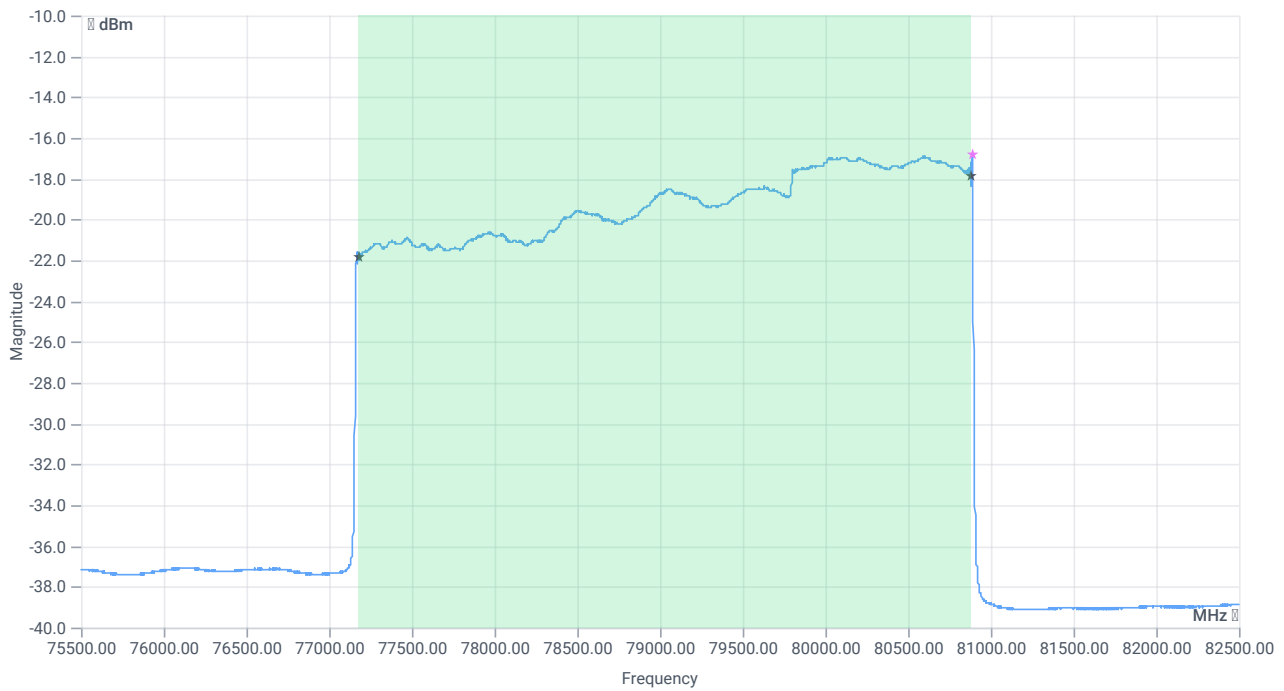

BW 99PCT



Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

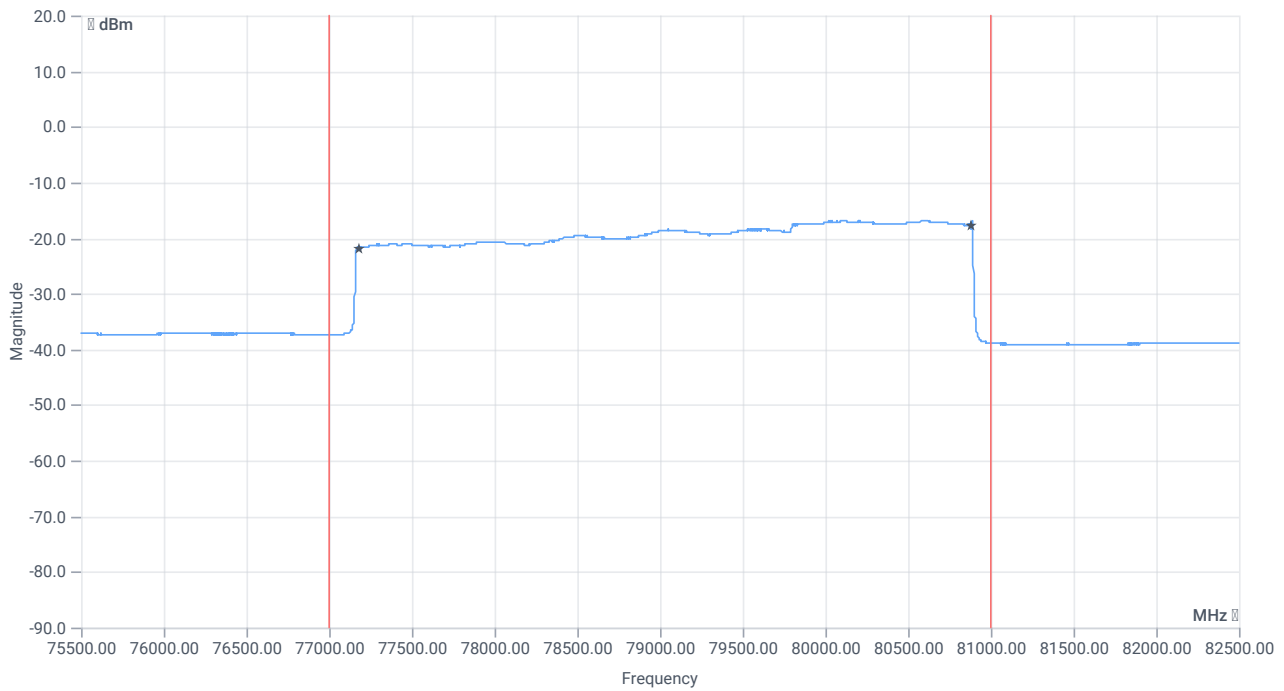

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3706.95	MHz	INFO
T1 99%	77000.00	---	77176.11	MHz	PASS
T2 99%	---	81000.00	80883.05	MHz	PASS
Max value @ 80885.7 MHz	---	---	-16.83	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	07.03.2023 21:09:56
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	min
Voltage	max
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

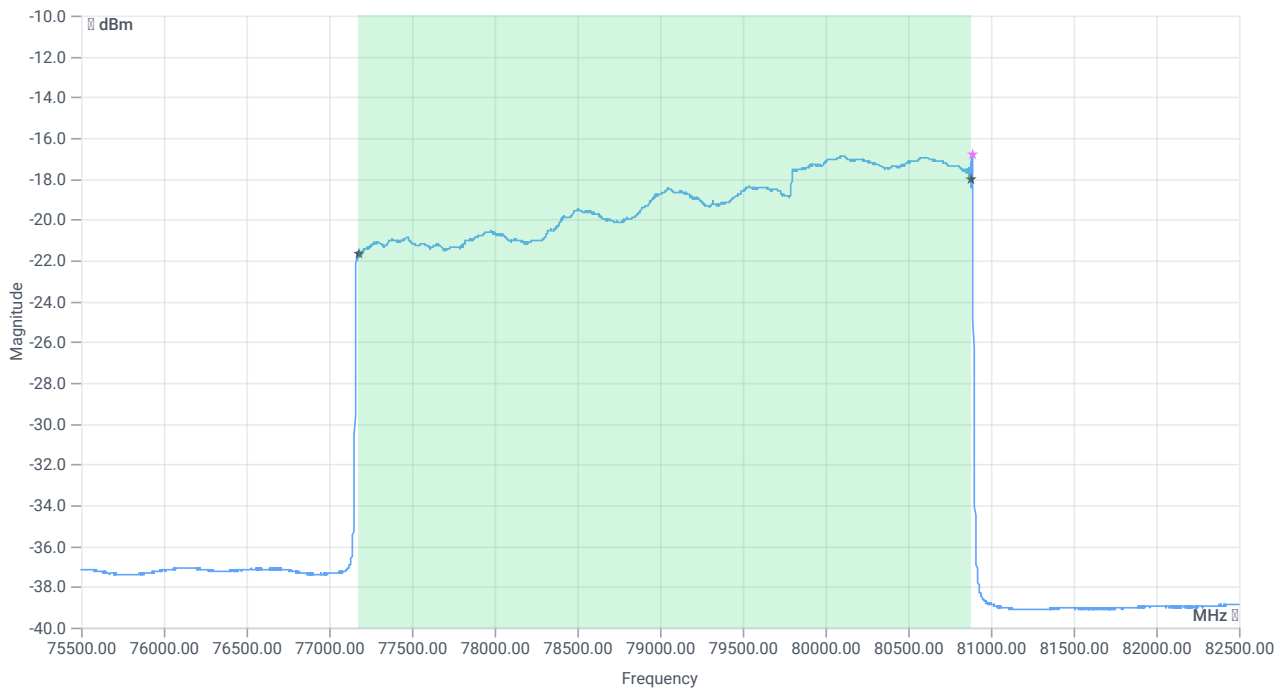

BW 99PCT

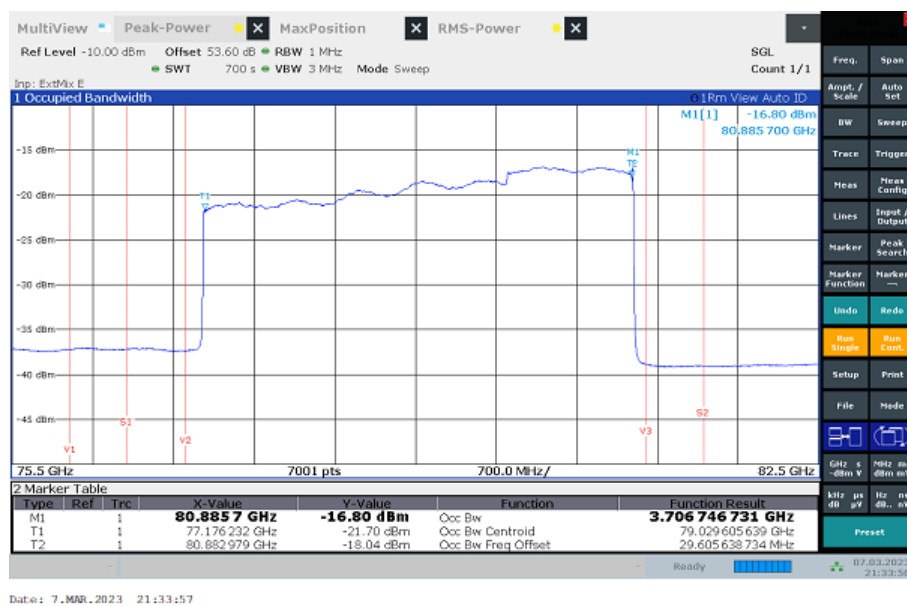

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

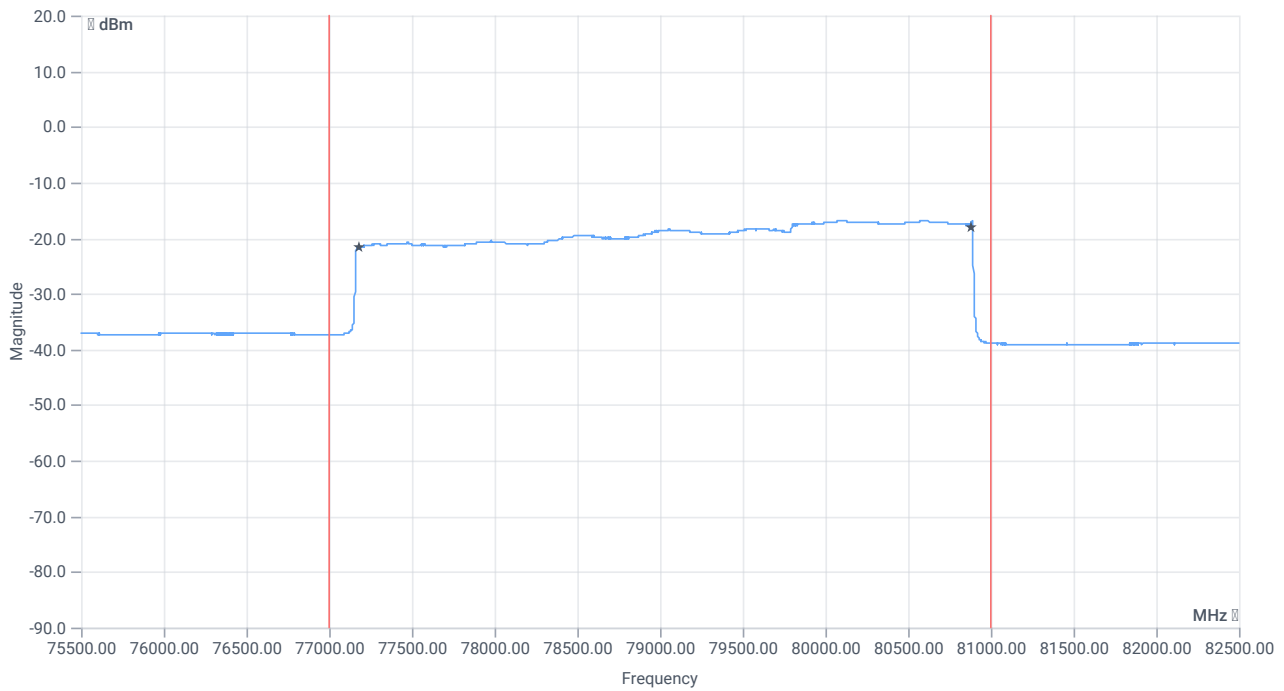

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3706.75	MHz	INFO
T1 99%	77000.00	---	77176.23	MHz	PASS
T2 99%	---	81000.00	80882.98	MHz	PASS
Max value @ 80885.7 MHz	---	---	-16.80	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	09.03.2023 15:12:27
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	max
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

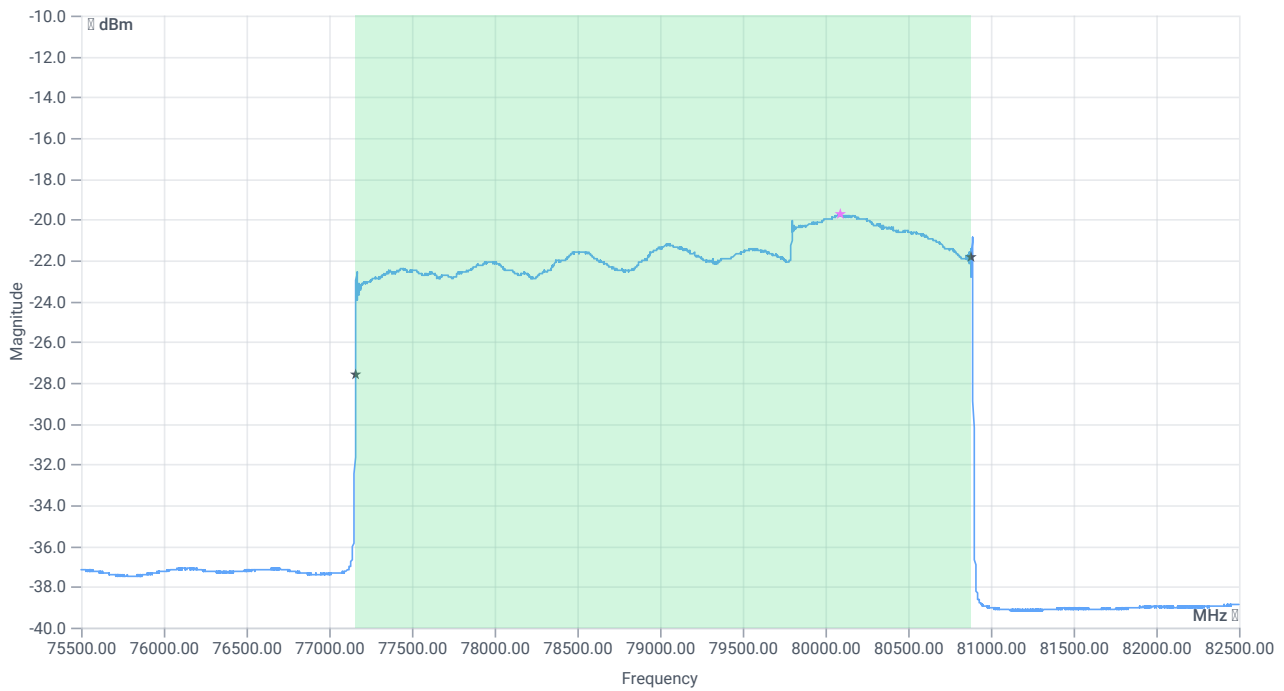

BW 99PCT

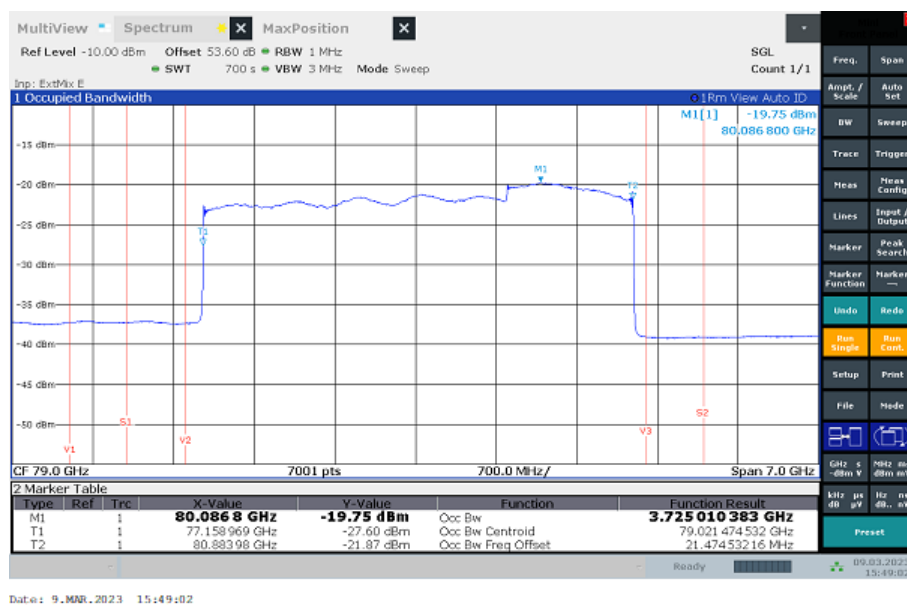

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

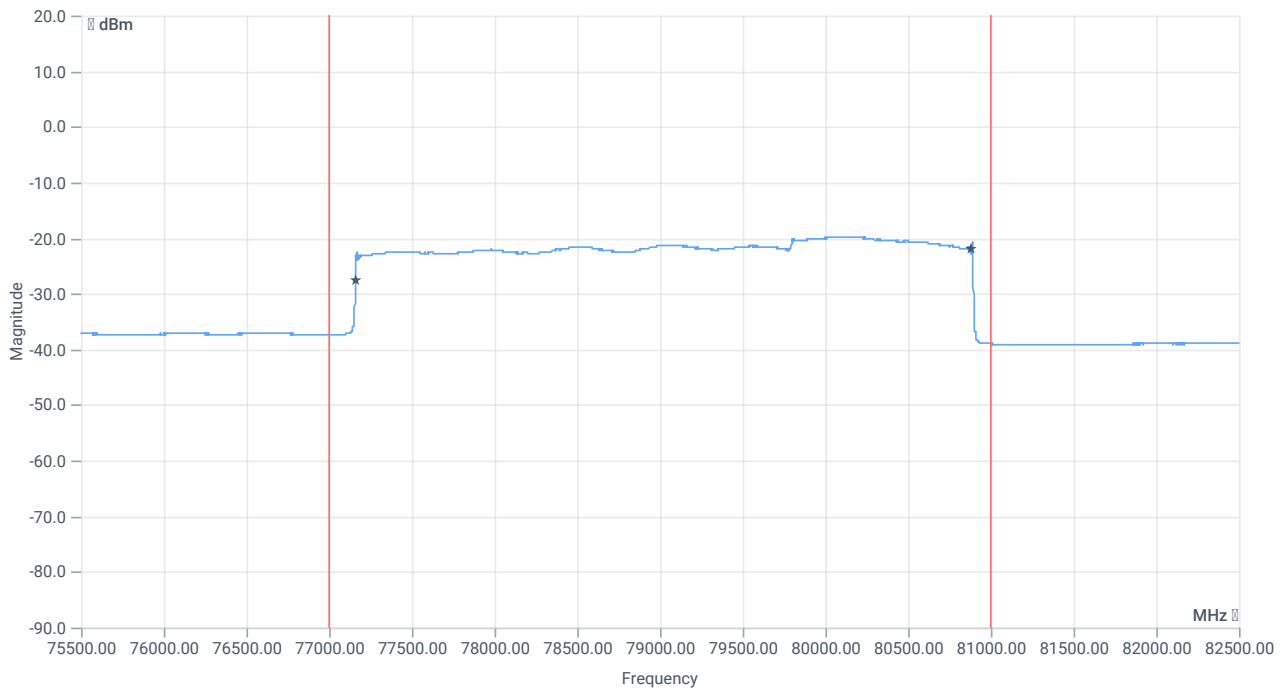

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3725.01	MHz	INFO
T1 99%	77000.00	---	77158.97	MHz	PASS
T2 99%	---	81000.00	80883.98	MHz	PASS
Max value @ 80086.8 MHz	---	---	-19.75	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	08.03.2023 09:59:57
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	max
Voltage	min
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

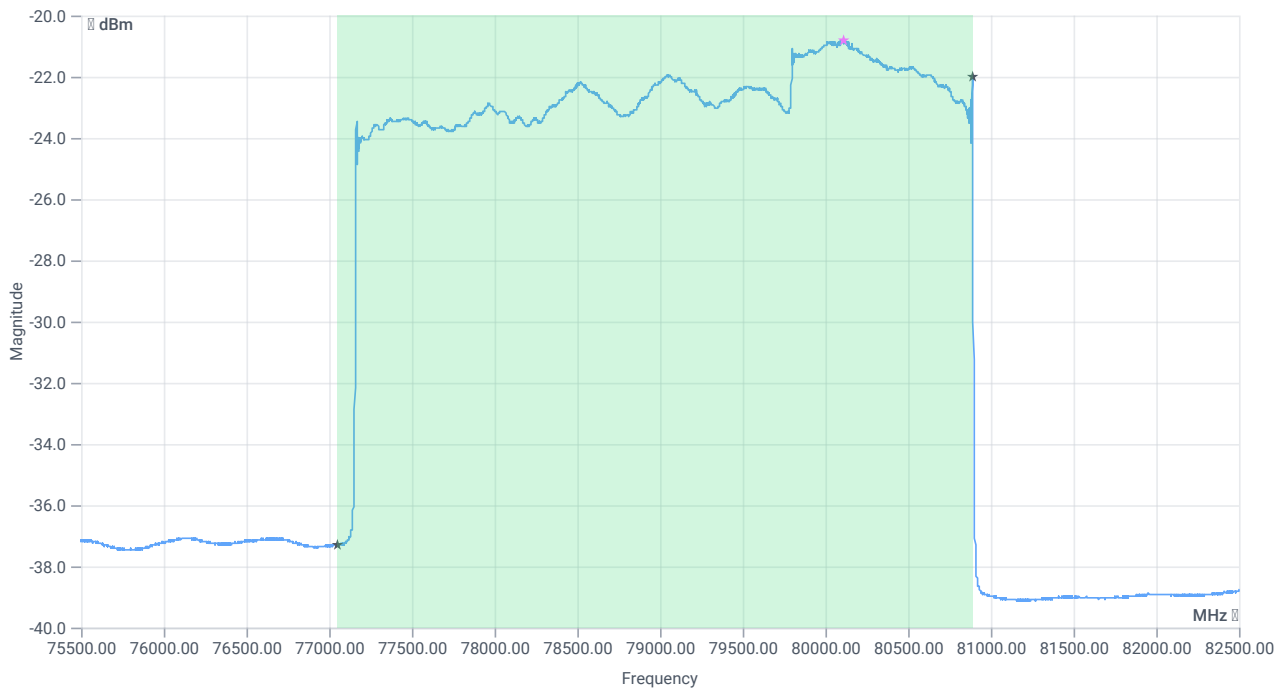

BW 99PCT

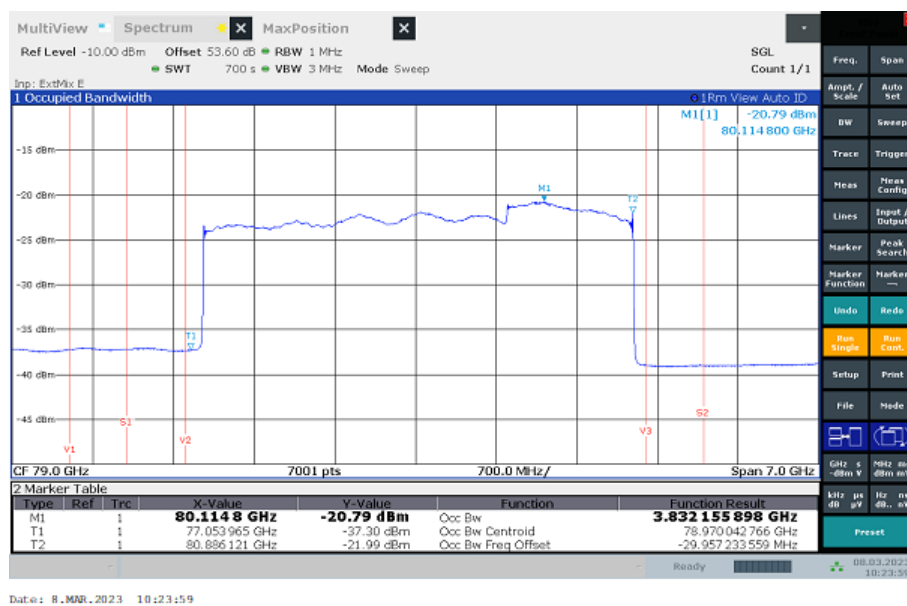

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

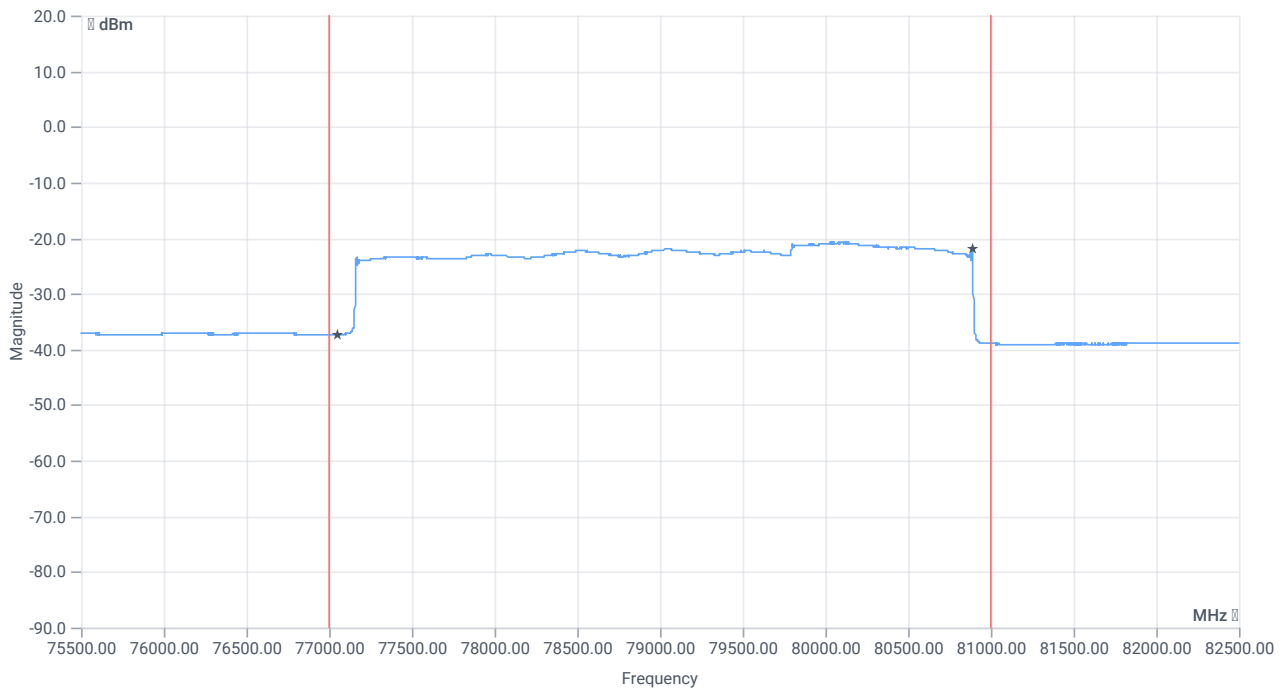

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3832.16	MHz	INFO
T1 99%	77000.00	---	77053.96	MHz	PASS
T2 99%	---	81000.00	80886.12	MHz	PASS
Max value @ 80114.8 MHz	---	---	-20.79	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz

Test References

TC Start	08.03.2023 10:27:58
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Normal

Test Parameter


Switched Path	none
Temperature	max
Voltage	max
Additional Information	Cycle Time: 100ms Mode: Normal

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

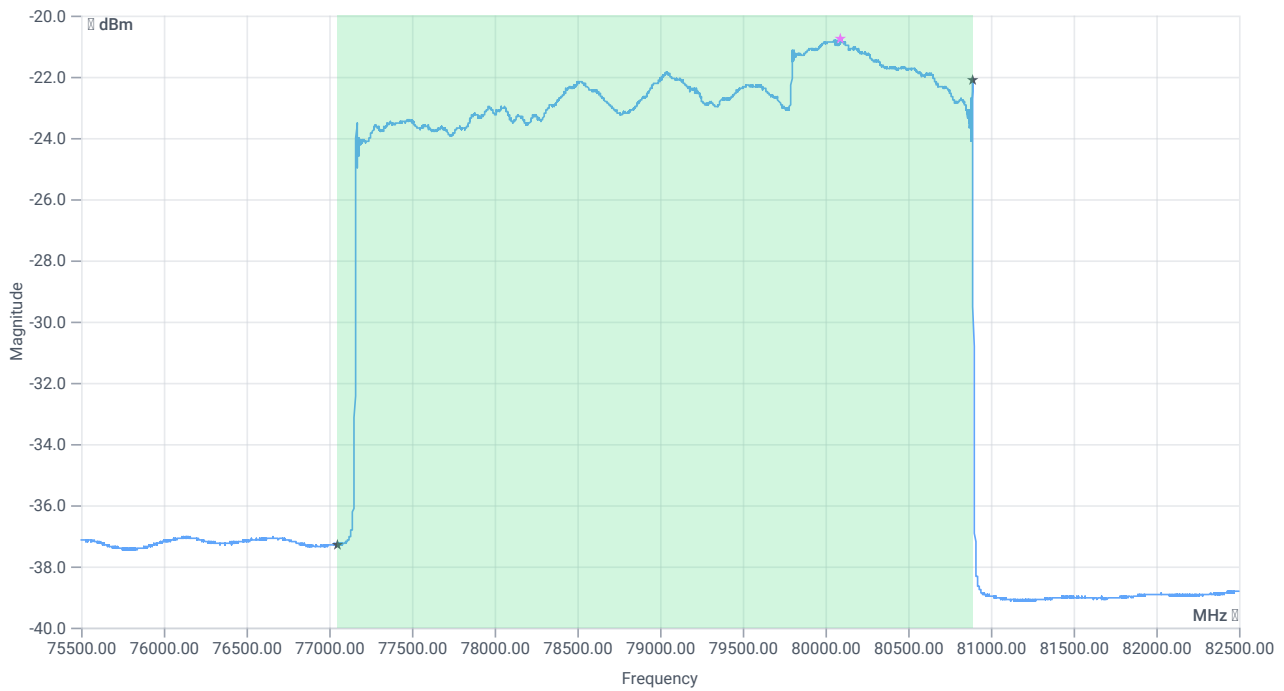

BW 99PCT

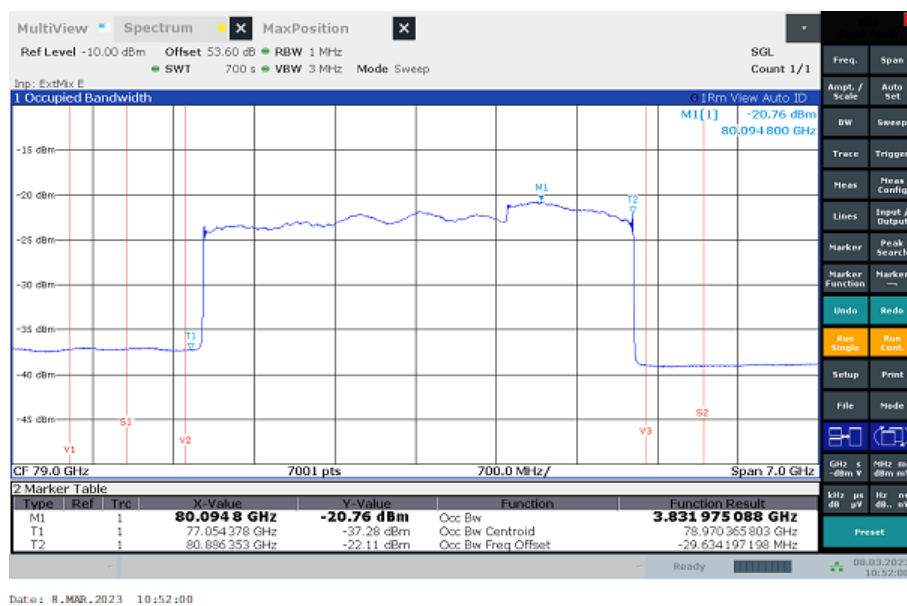

Systems EN # Bandwidth 99pct ~ Mode: Normal 77000-81000 MHz 99PCT

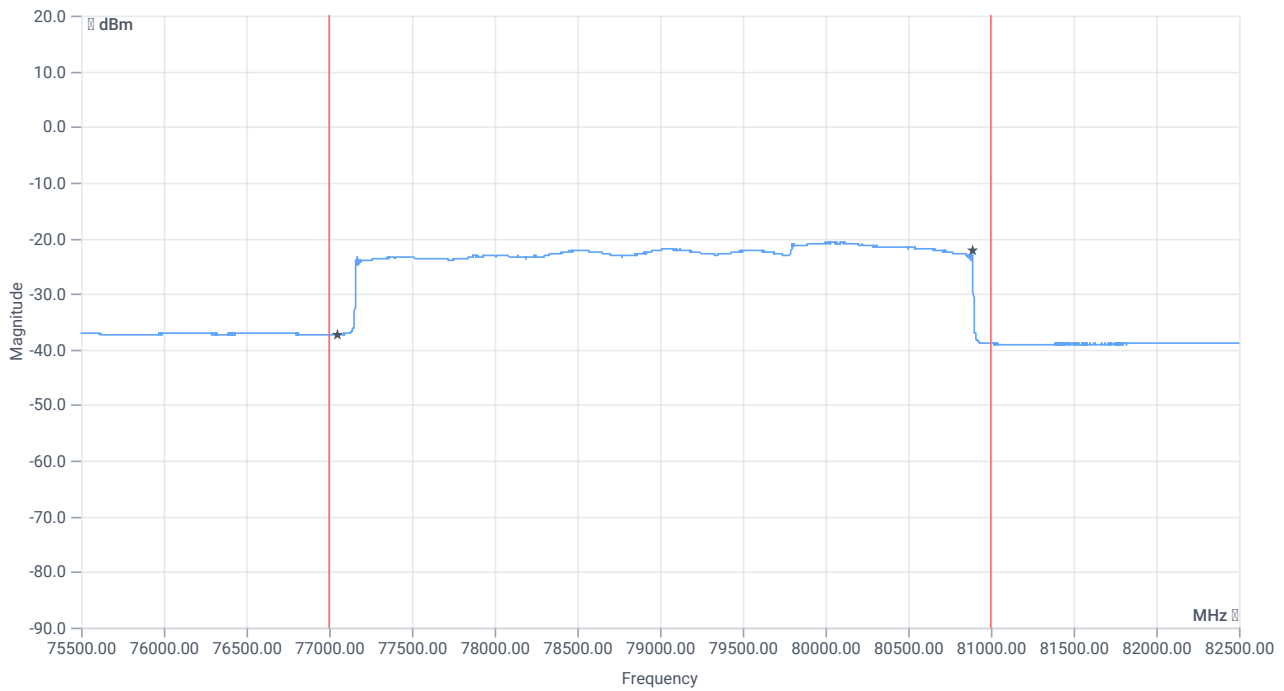

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3831.98	MHz	INFO
T1 99%	77000.00	---	77054.38	MHz	PASS
T2 99%	---	81000.00	80886.35	MHz	PASS
Max value @ 80094.8 MHz	---	---	-20.76	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 12:47:54
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	nom
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

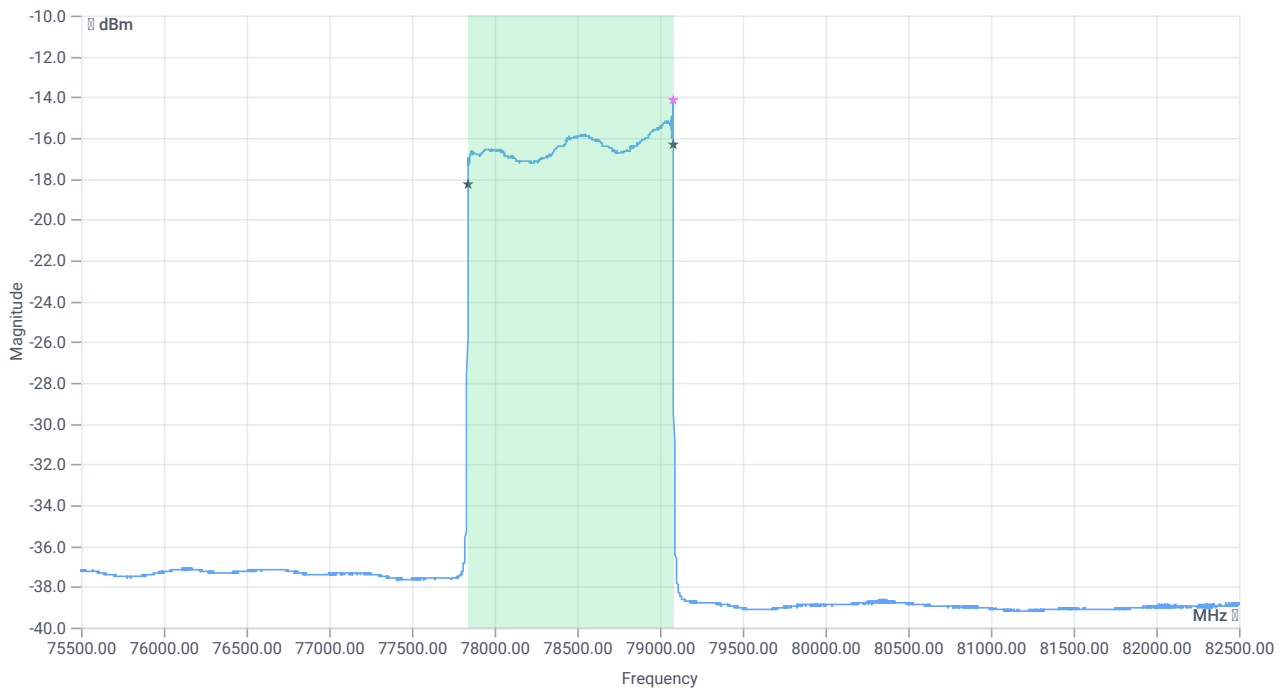

BW 99PCT

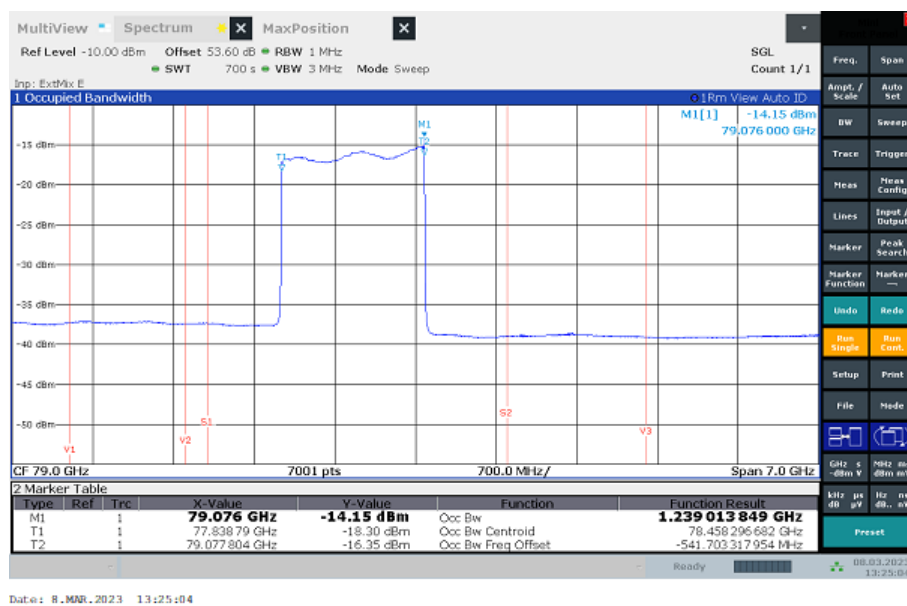

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

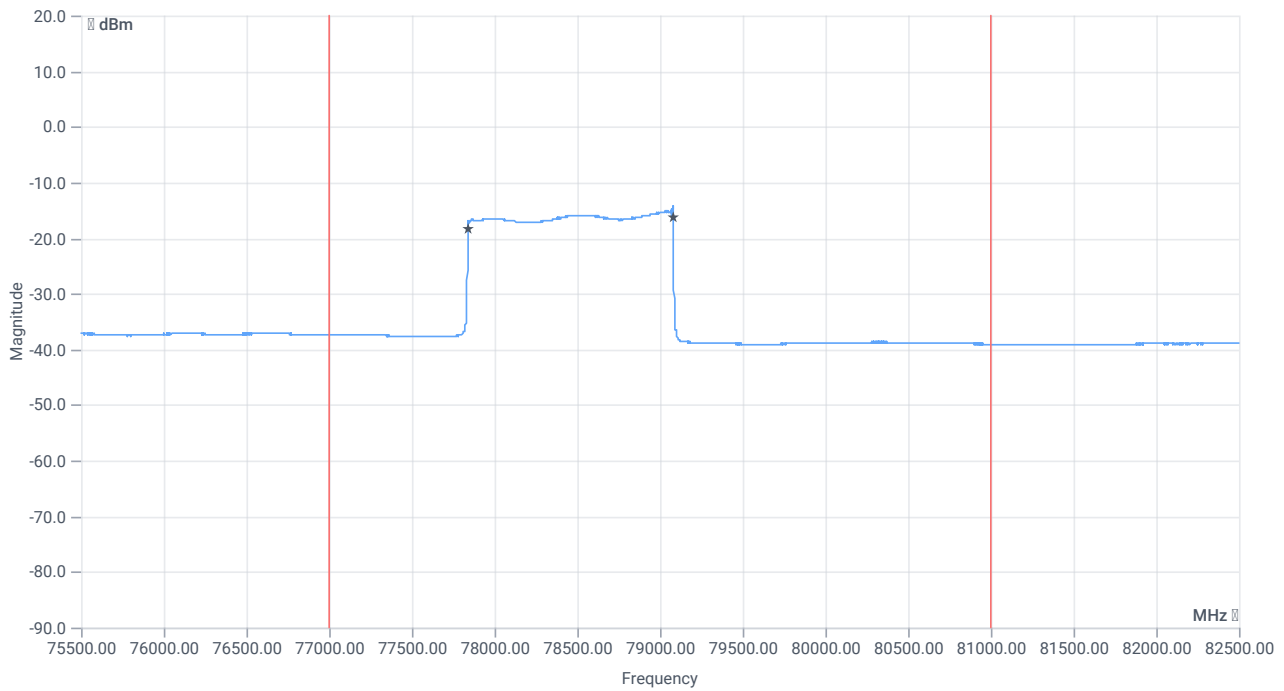

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1239.01	MHz	INFO
T1 99%	77000.00	---	77838.79	MHz	PASS
T2 99%	---	81000.00	79077.80	MHz	PASS
Max value @ 79076 MHz	---	---	-14.15	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 13:29:03
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	nom
Voltage	min
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

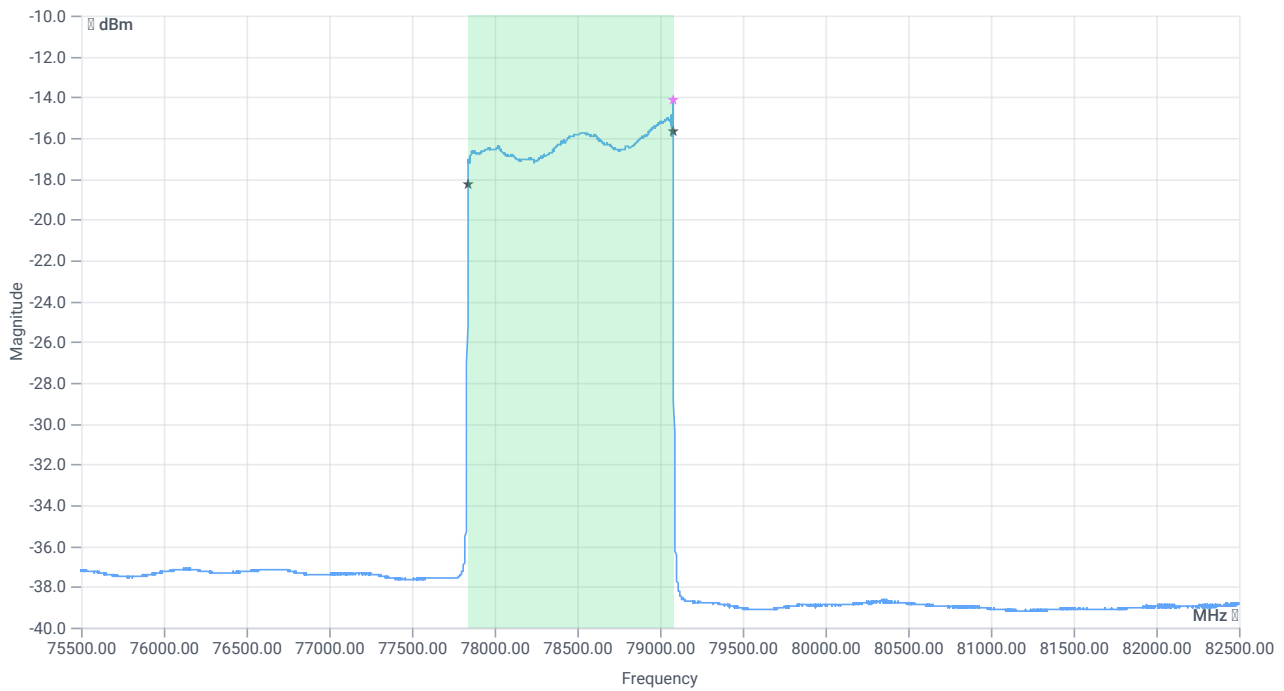

BW 99PCT

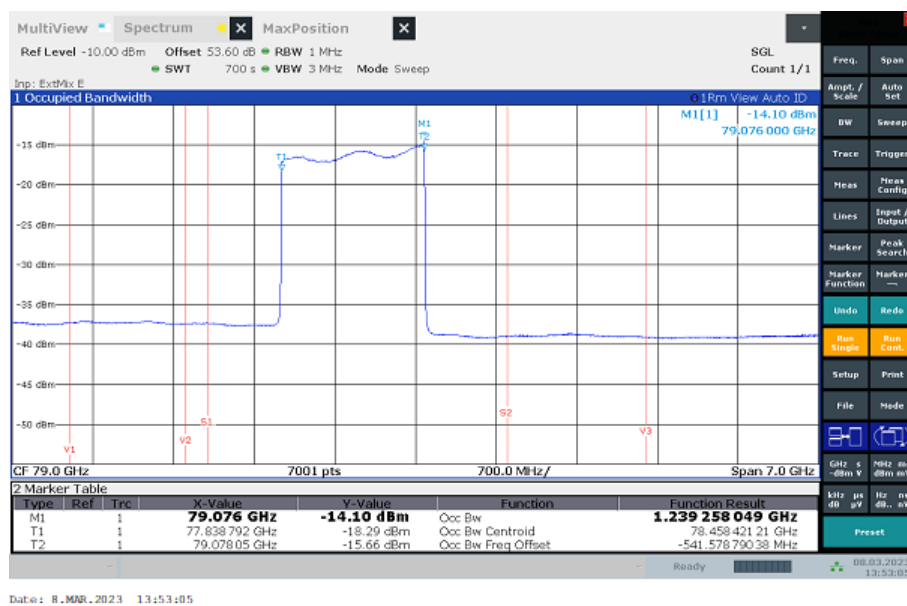

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

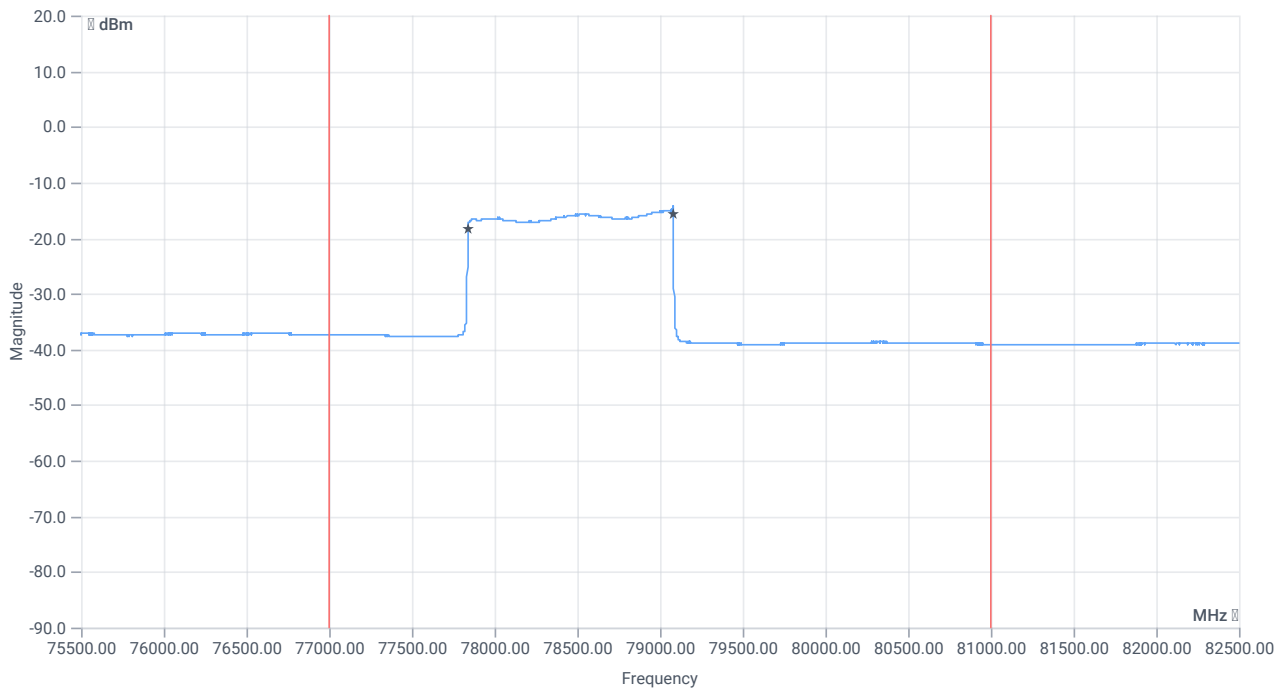

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1239.26	MHz	INFO
T1 99%	77000.00	---	77838.79	MHz	PASS
T2 99%	---	81000.00	79078.05	MHz	PASS
Max value @ 79076 MHz	---	---	-14.10	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 13:57:04
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	nom
Voltage	max
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

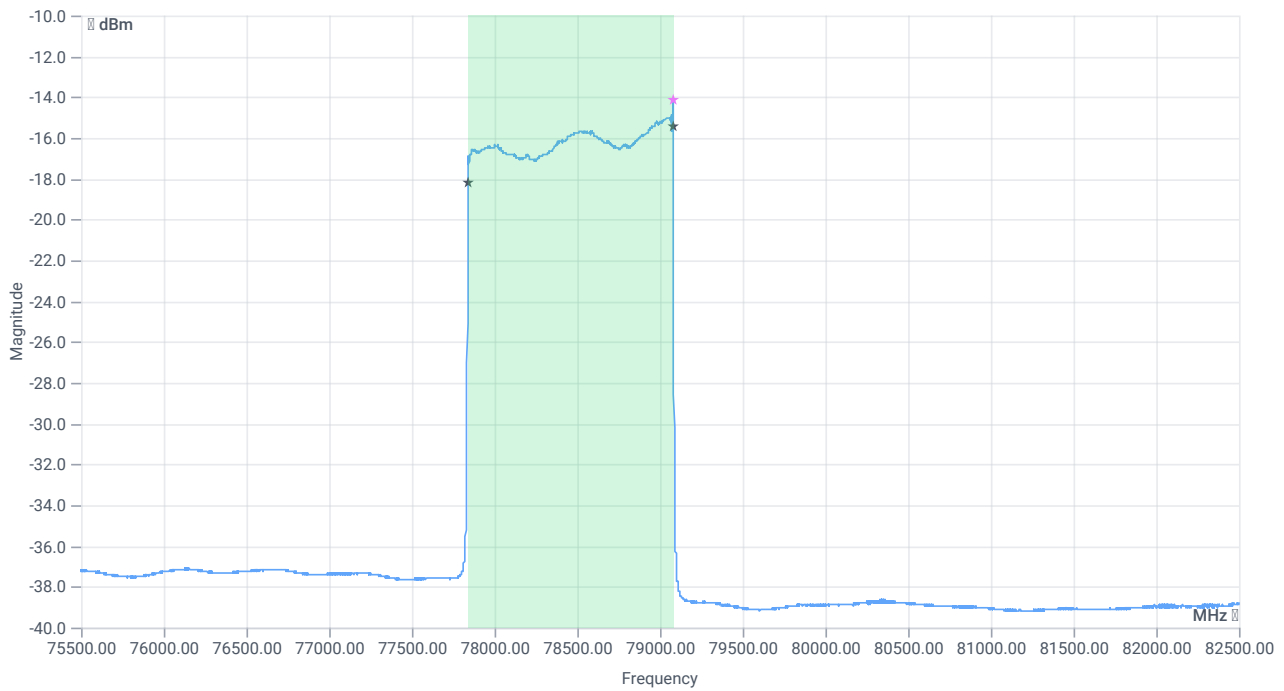

BW 99PCT

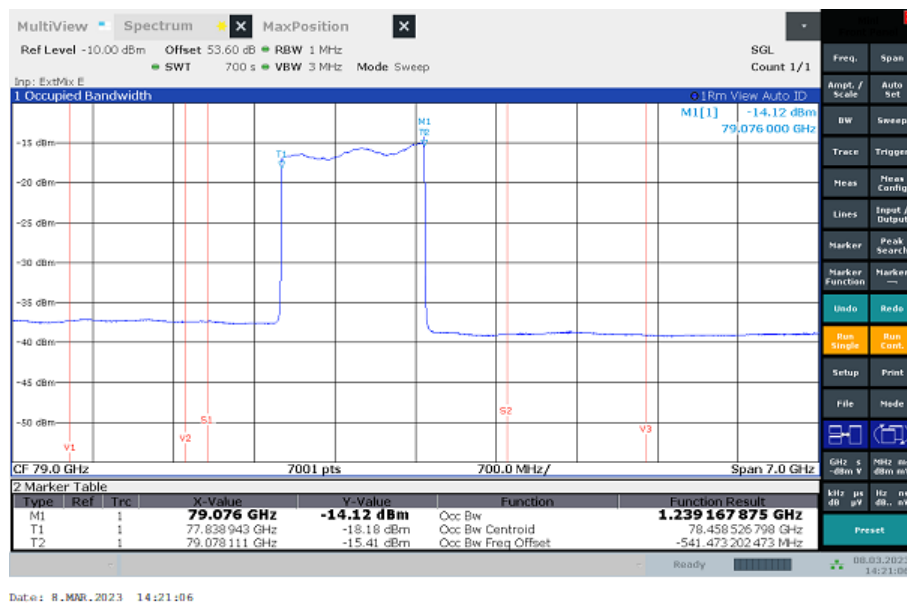

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

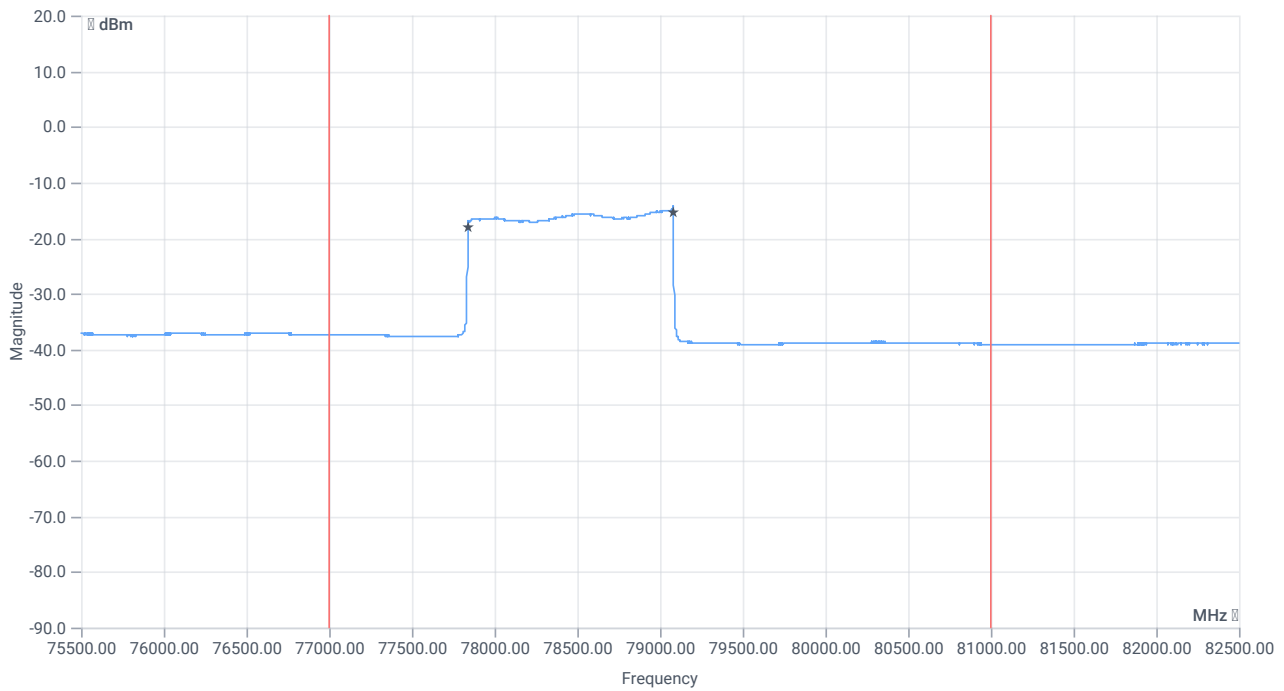

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1239.17	MHz	INFO
T1 99%	77000.00	---	77838.94	MHz	PASS
T2 99%	---	81000.00	79078.11	MHz	PASS
Max value @ 79076 MHz	---	---	-14.12	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 14:25:05
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	min
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

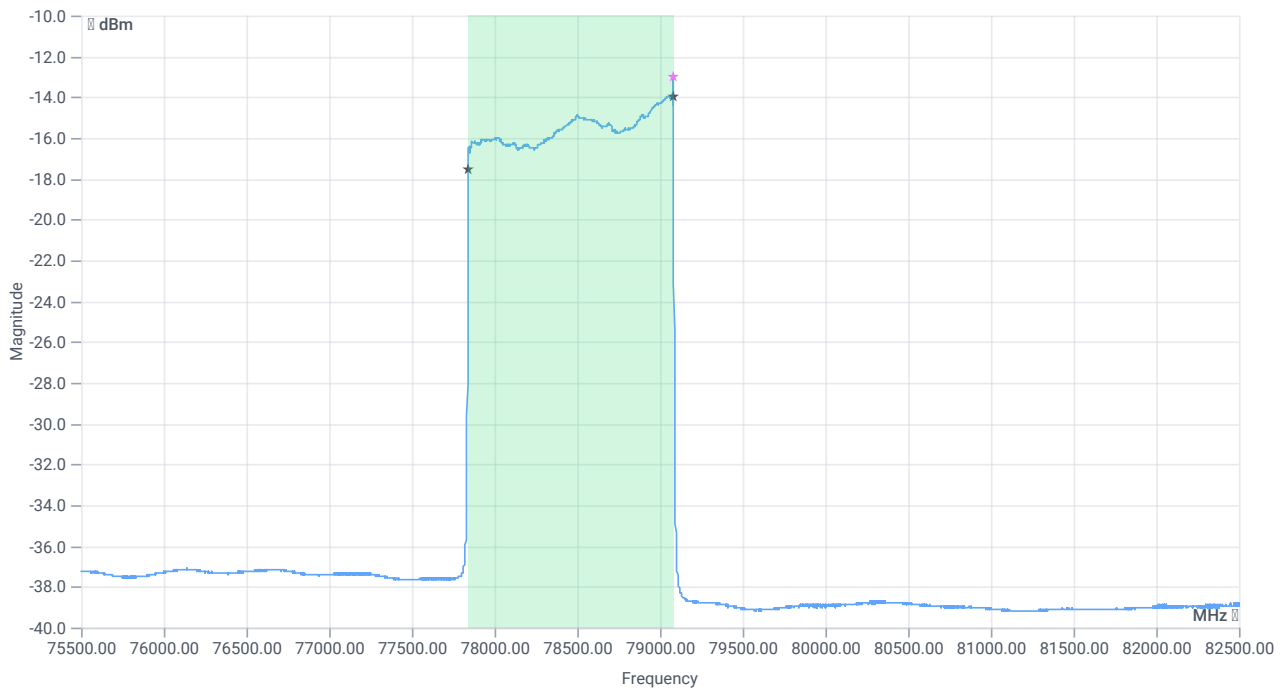

BW 99PCT

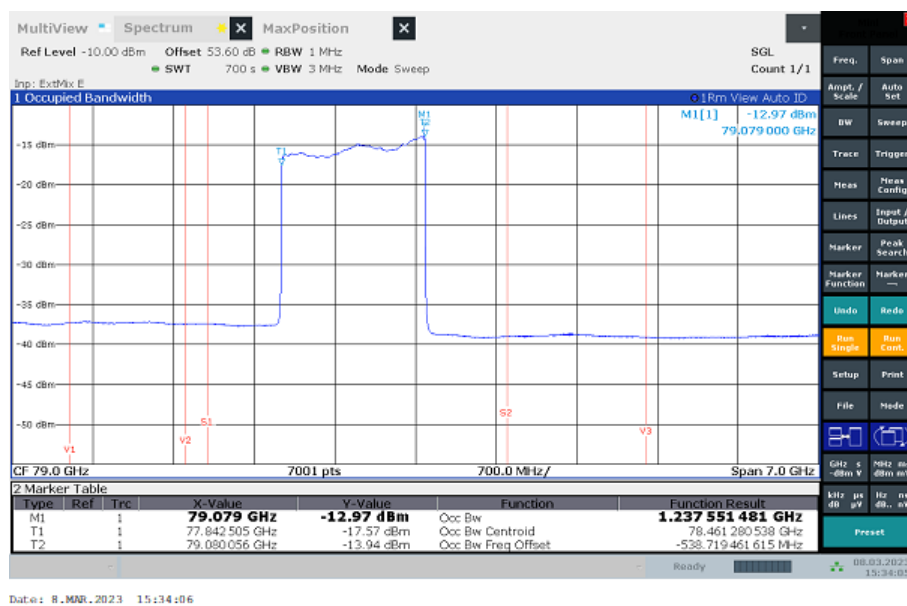

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

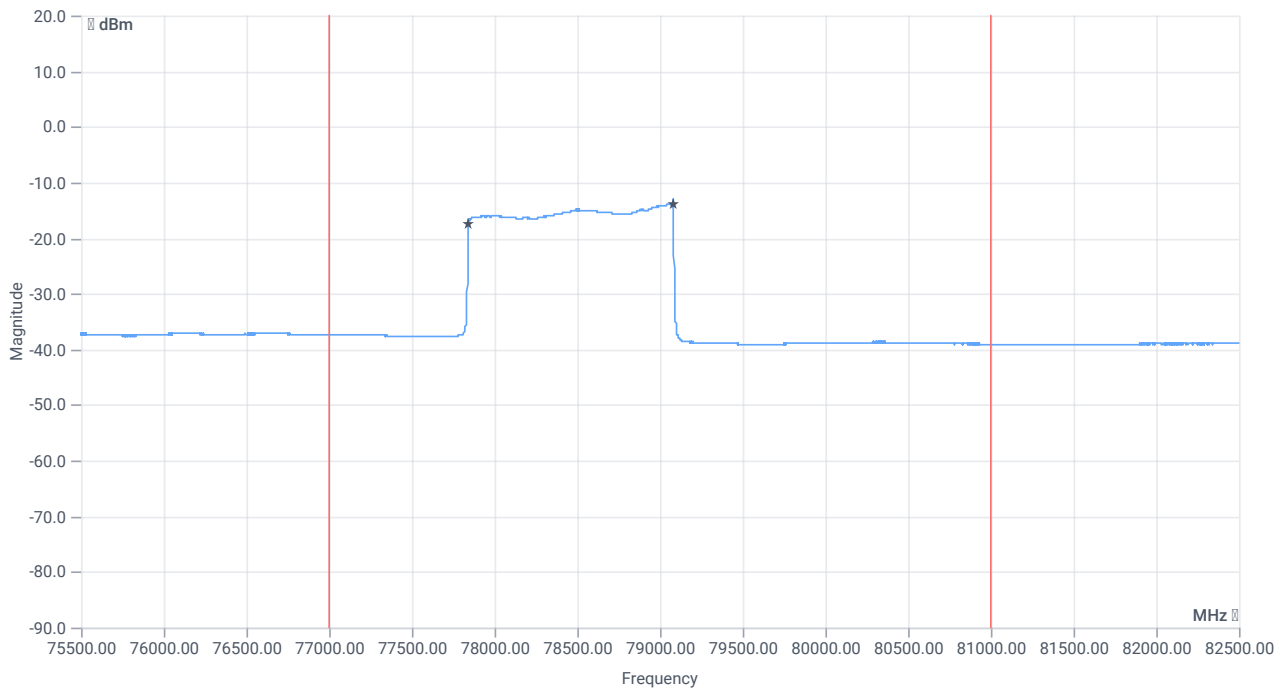

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1237.55	MHz	INFO
T1 99%	77000.00	---	77842.50	MHz	PASS
T2 99%	---	81000.00	79080.06	MHz	PASS
Max value @ 79079 MHz	---	---	-12.97	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 15:38:05
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	min
Voltage	min
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

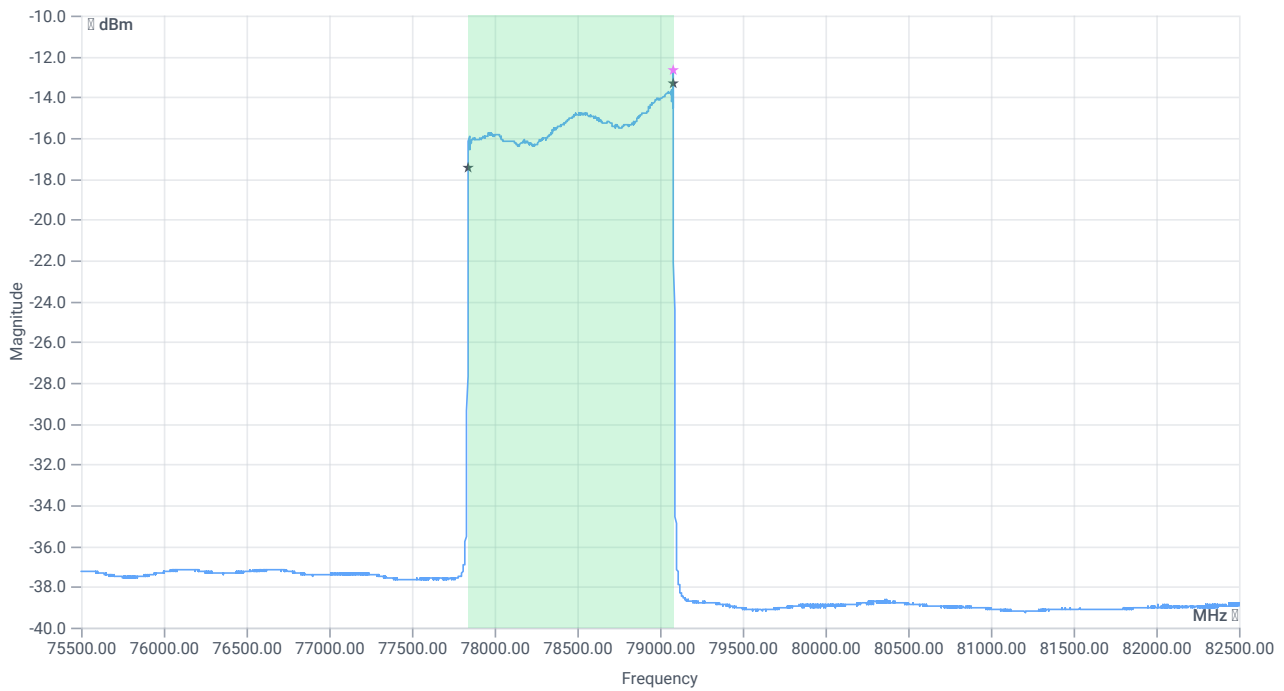

BW 99PCT

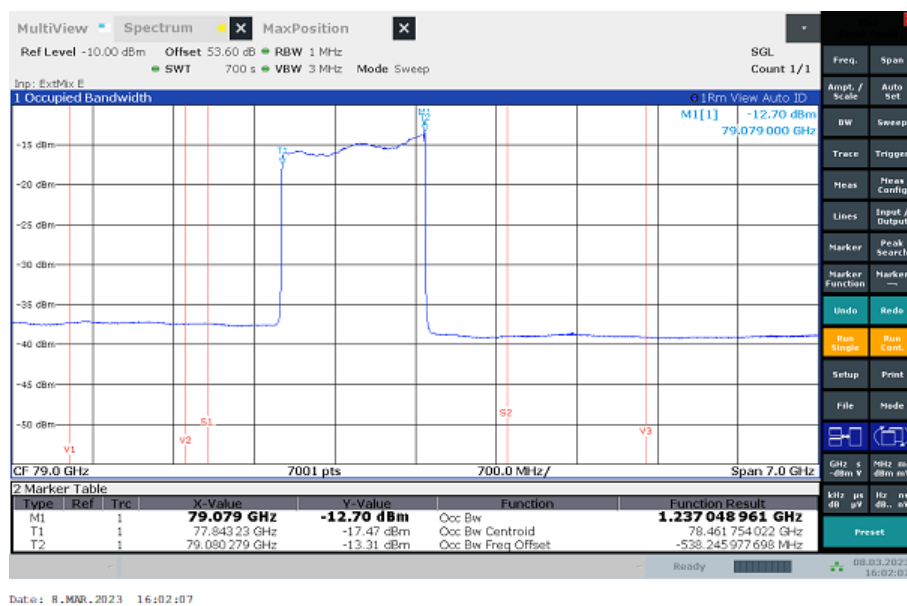

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

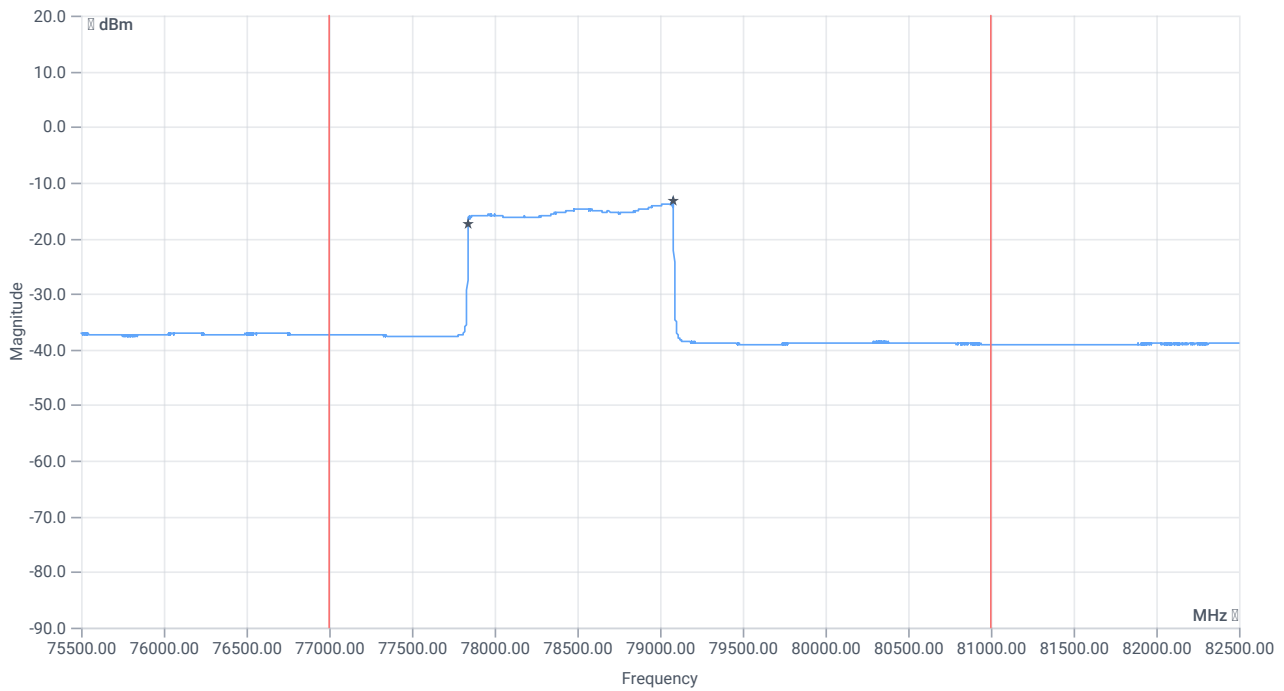

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1237.05	MHz	INFO
T1 99%	77000.00	---	77843.23	MHz	PASS
T2 99%	---	81000.00	79080.28	MHz	PASS
Max value @ 79079 MHz	---	---	-12.70	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 16:06:06
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	min
Voltage	max
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

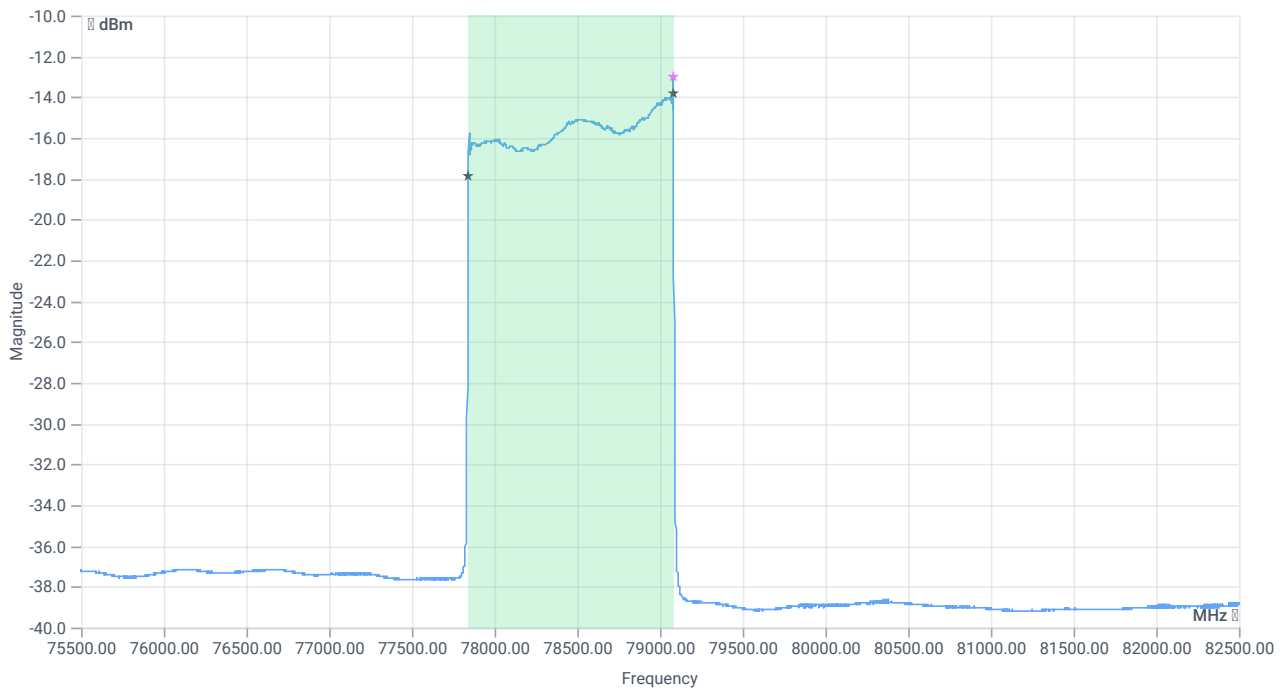

BW 99PCT

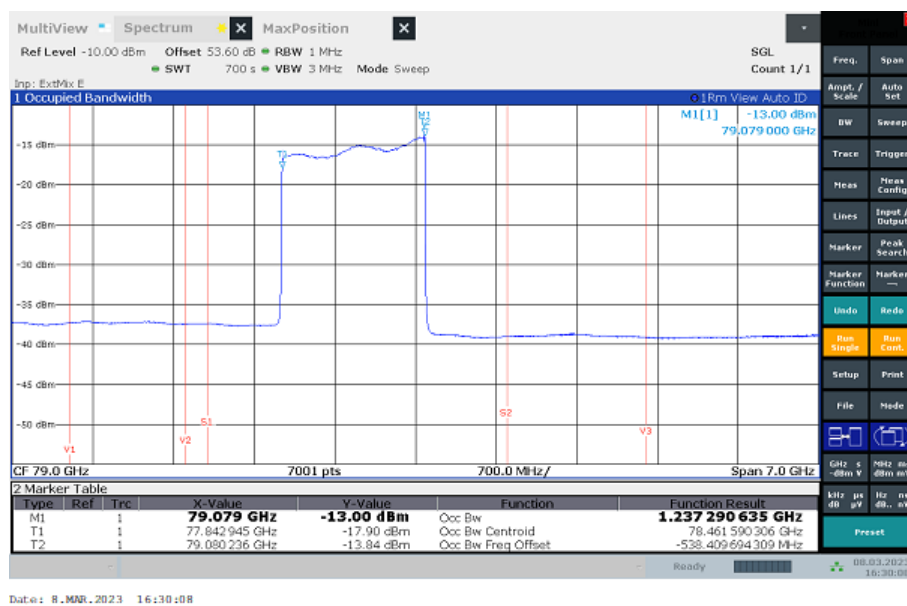

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

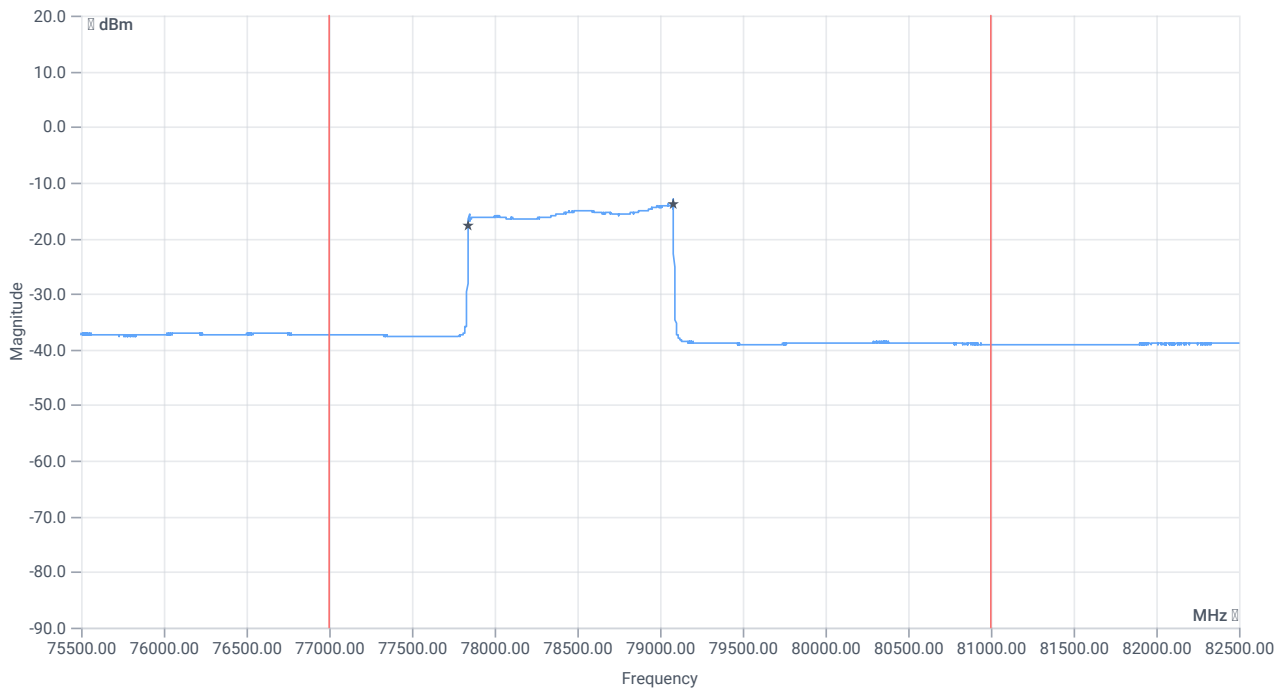

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1237.29	MHz	INFO
T1 99%	77000.00	---	77842.94	MHz	PASS
T2 99%	---	81000.00	79080.24	MHz	PASS
Max value @ 79079 MHz	---	---	-13.00	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 16:34:08
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	max
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

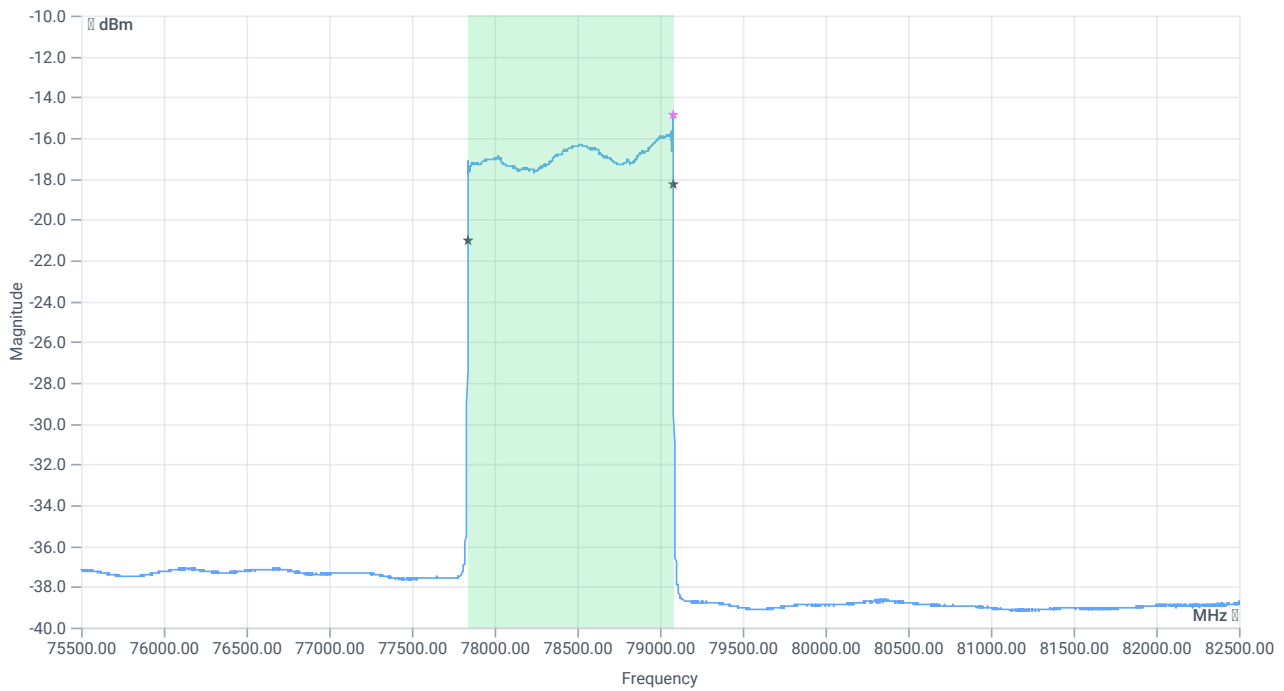

BW 99PCT

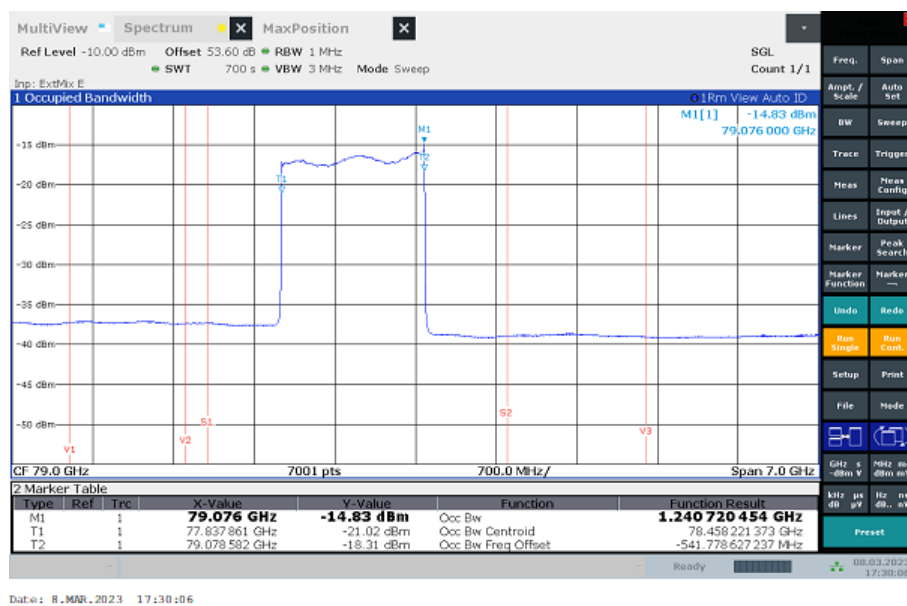

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

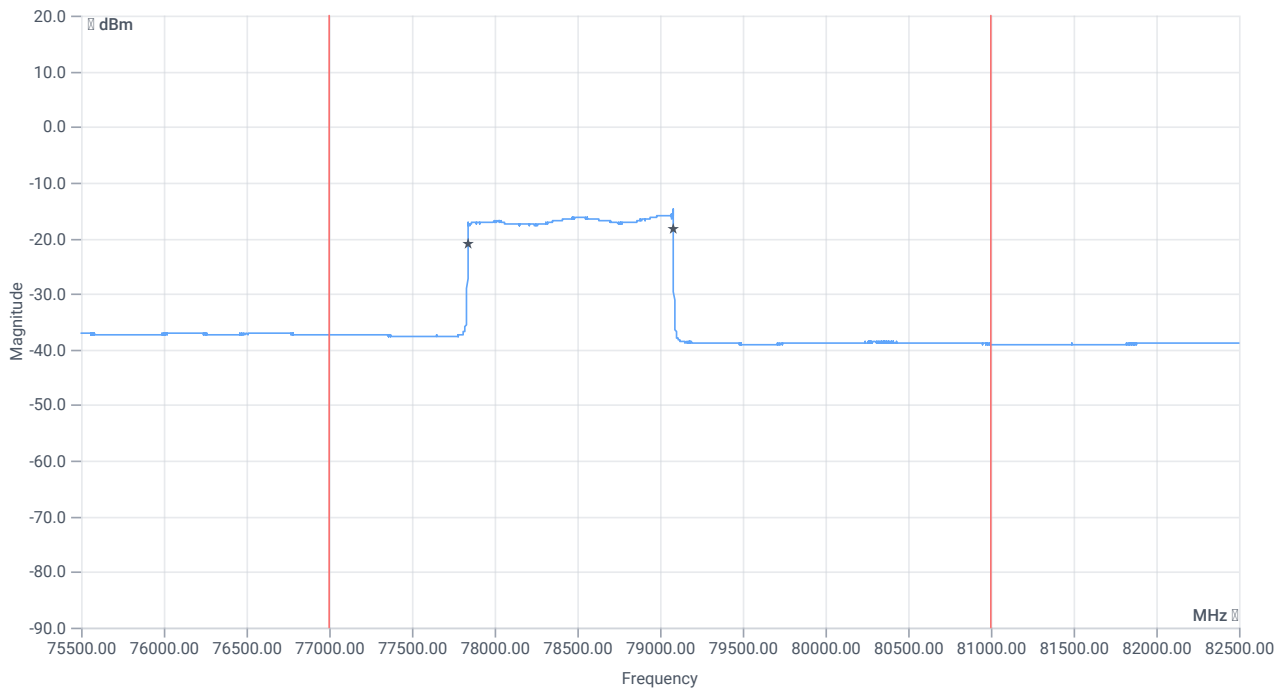

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1240.72	MHz	INFO
T1 99%	77000.00	---	77837.86	MHz	PASS
T2 99%	---	81000.00	79078.58	MHz	PASS
Max value @ 79076 MHz	---	---	-14.83	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 17:34:06
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	max
Voltage	min
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

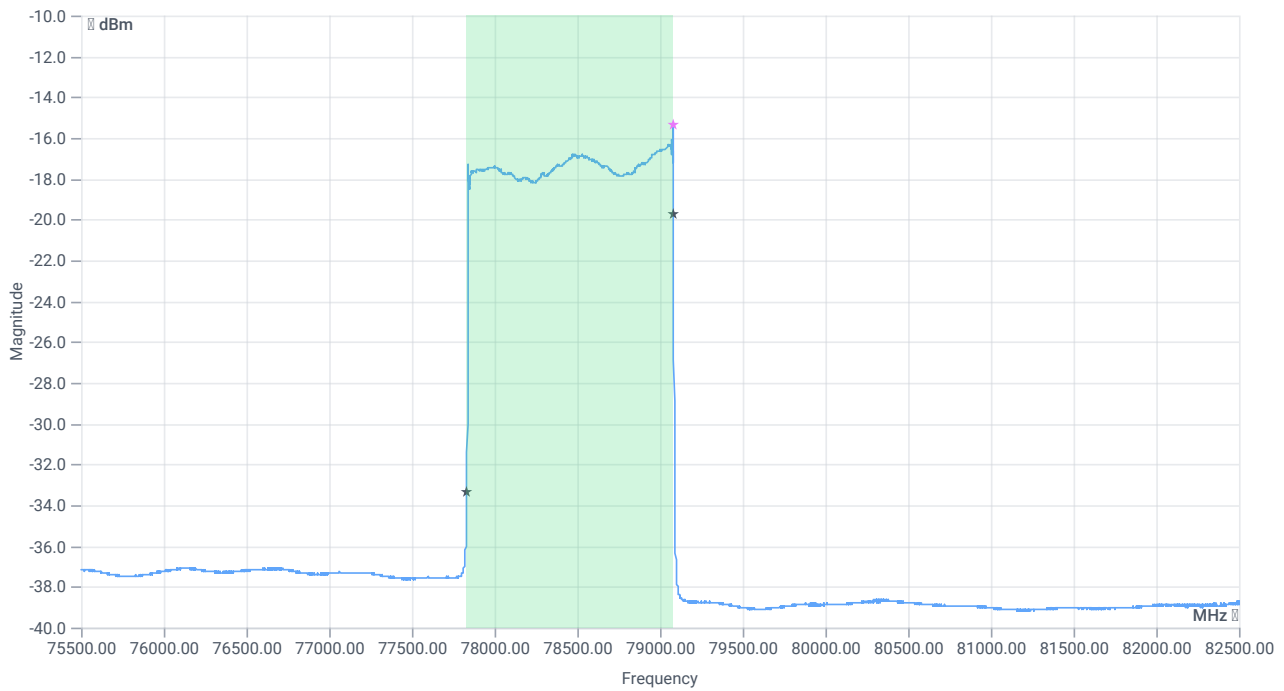

BW 99PCT

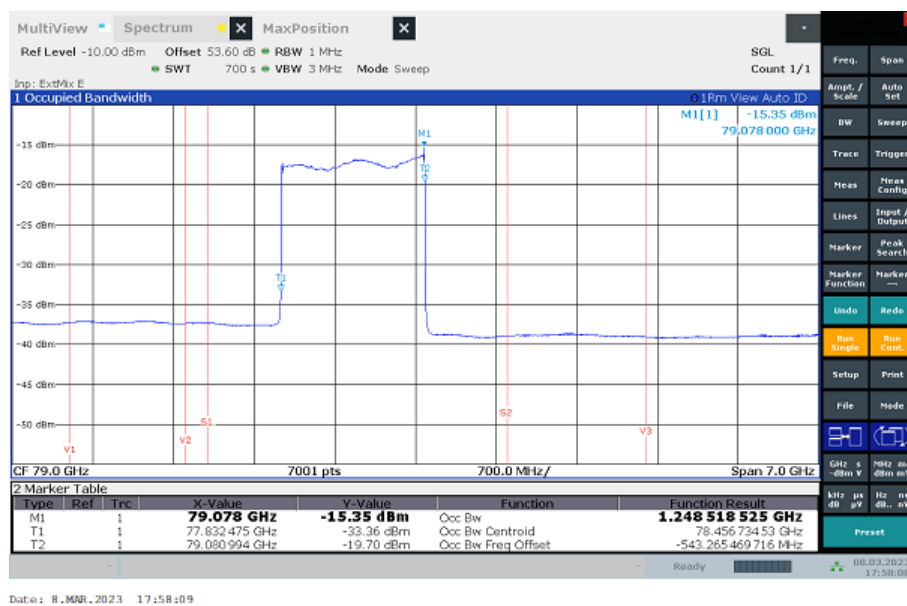

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

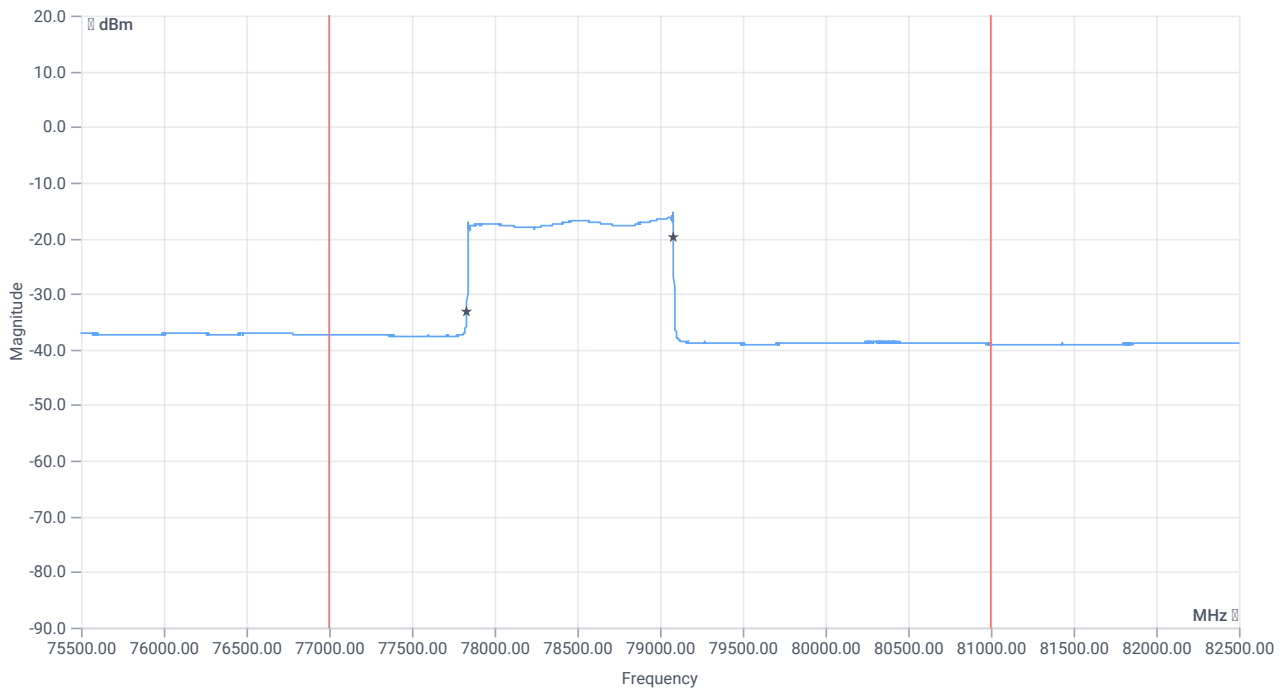

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1248.52	MHz	INFO
T1 99%	77000.00	---	77832.48	MHz	PASS
T2 99%	---	81000.00	79080.99	MHz	PASS
Max value @ 79078 MHz	---	---	-15.35	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz

Test References

TC Start	08.03.2023 18:02:09
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: High

Test Parameter


Switched Path	none
Temperature	max
Voltage	max
Additional Information	Cycle Time: 100ms Mode: High

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

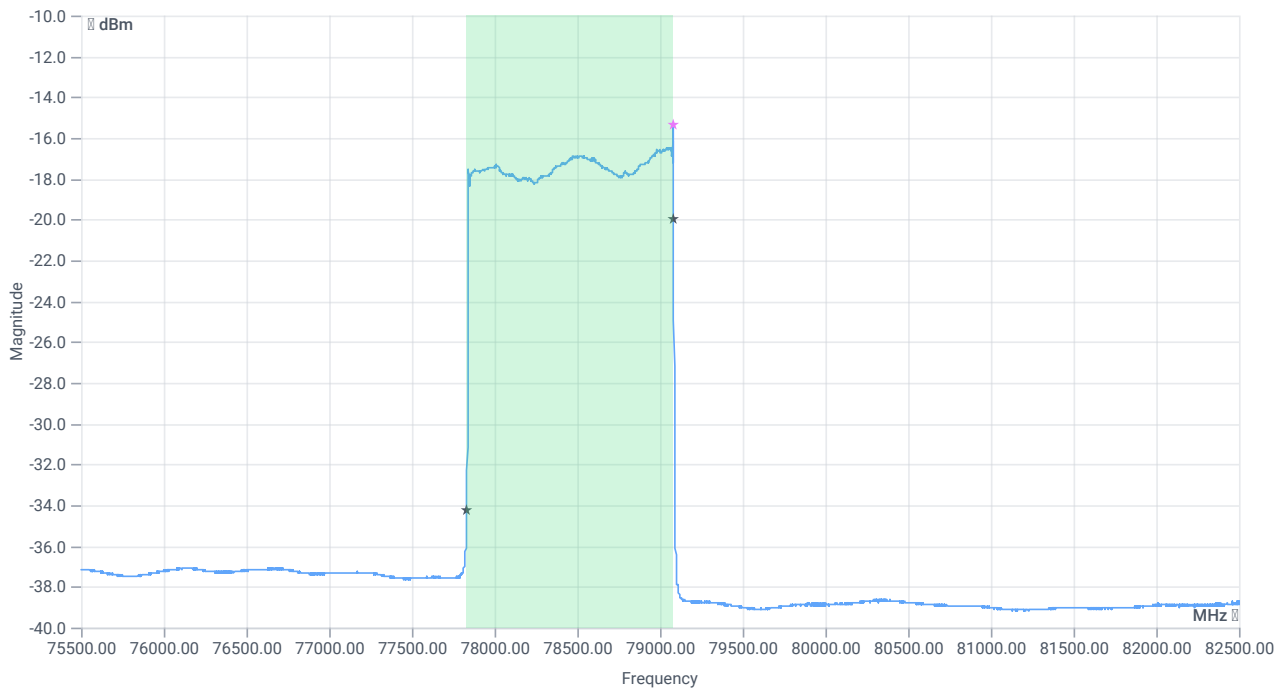

BW 99PCT

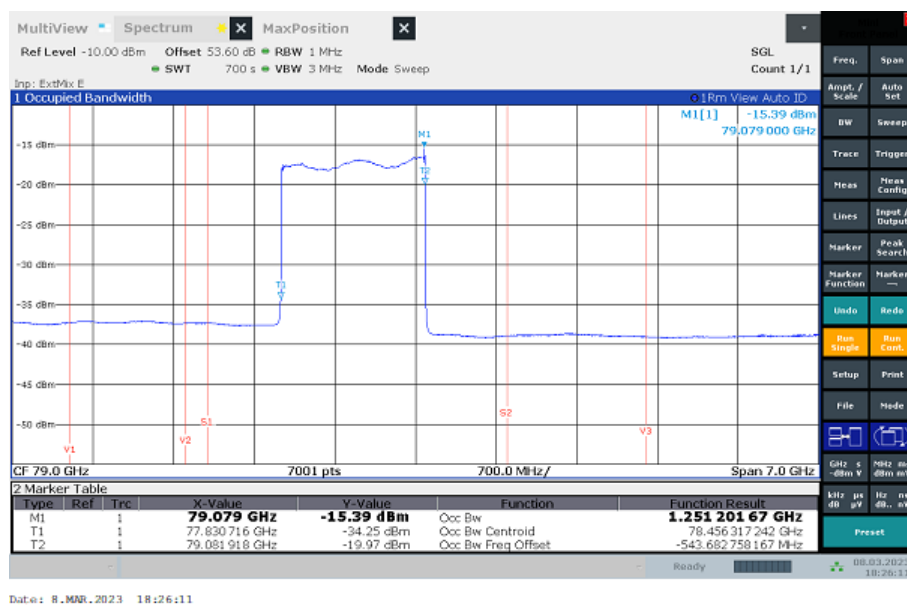

Systems EN # Bandwidth 99pct ~ Mode: High 77000-81000 MHz 99PCT

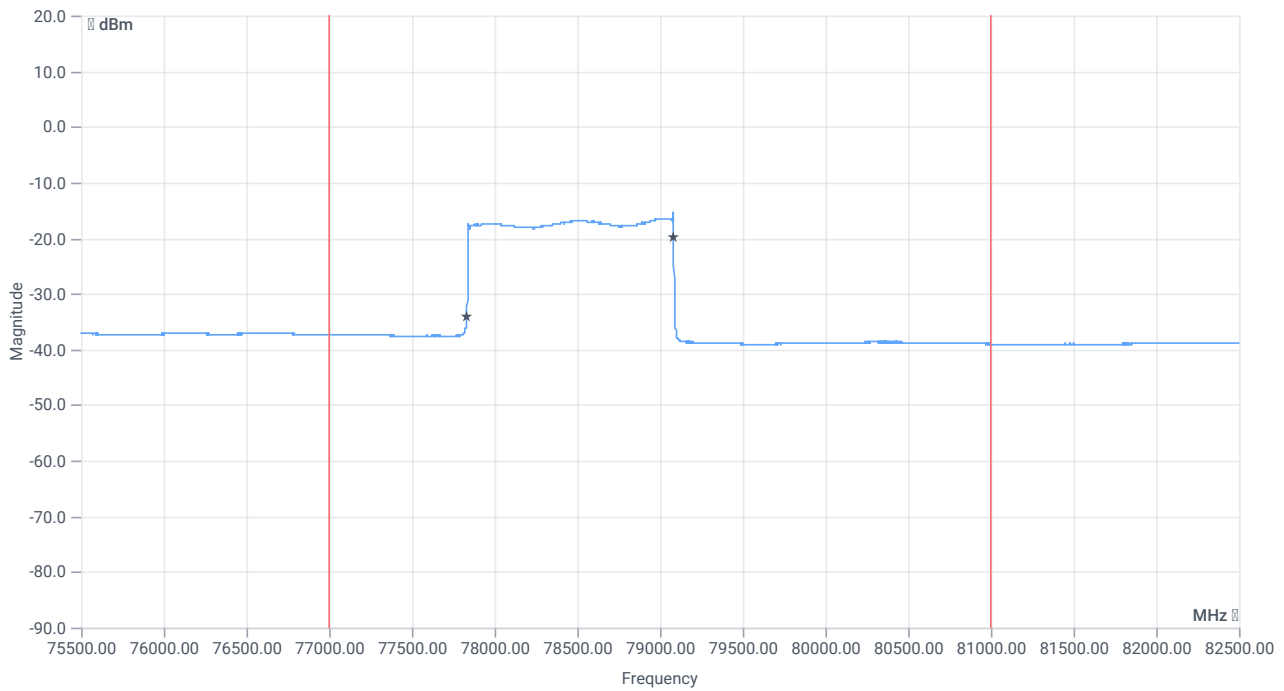

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1251.20	MHz	INFO
T1 99%	77000.00	---	77830.72	MHz	PASS
T2 99%	---	81000.00	79081.92	MHz	PASS
Max value @ 79079 MHz	---	---	-15.39	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 08:58:25
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	nom
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

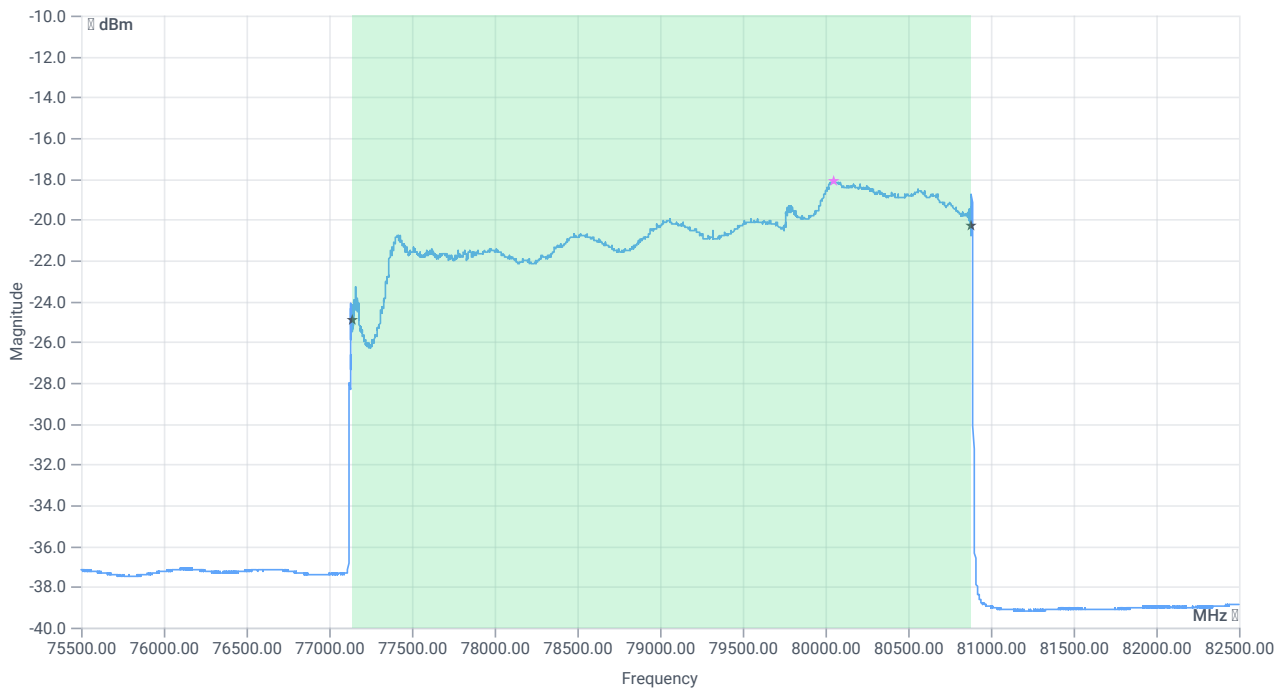

BW 99PCT

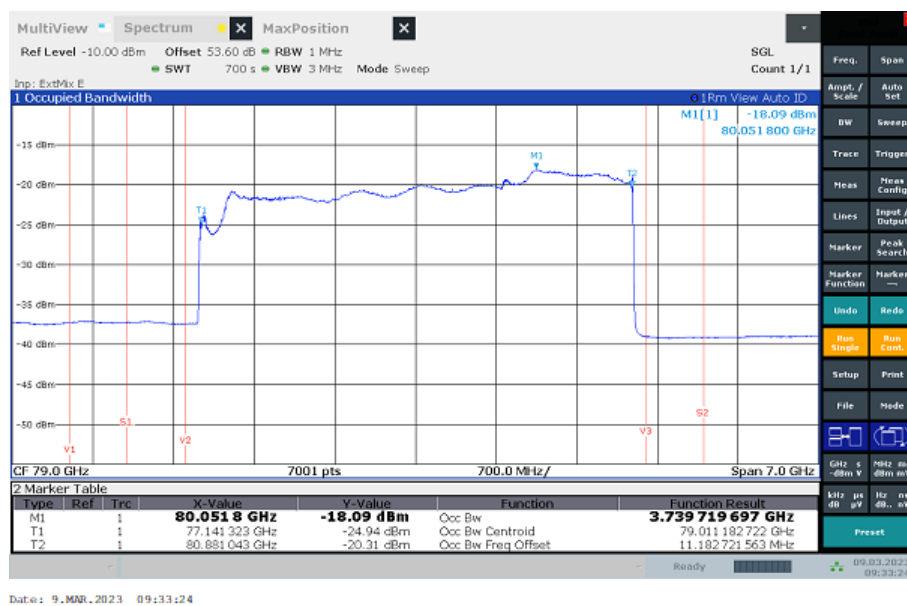

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

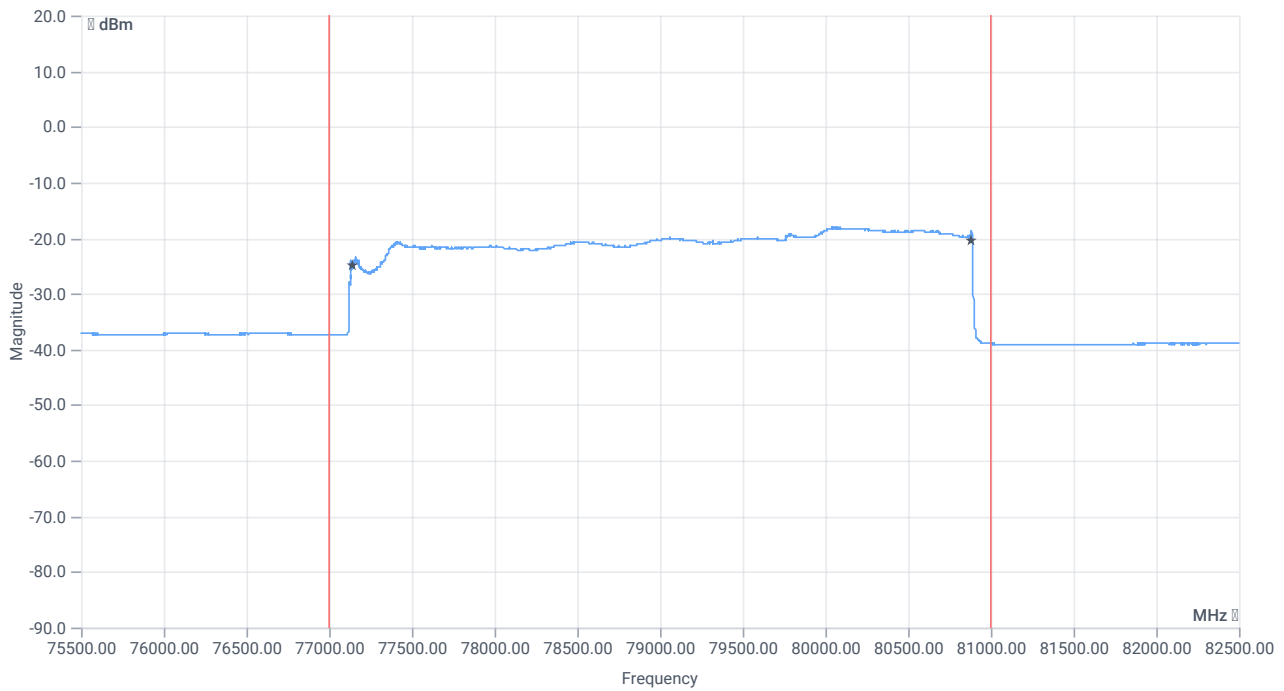

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3739.72	MHz	INFO
T1 99%	77000.00	---	77141.32	MHz	PASS
T2 99%	---	81000.00	80881.04	MHz	PASS
Max value @ 80051.8 MHz	---	---	-18.09	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 09:37:21
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	nom
Voltage	min
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

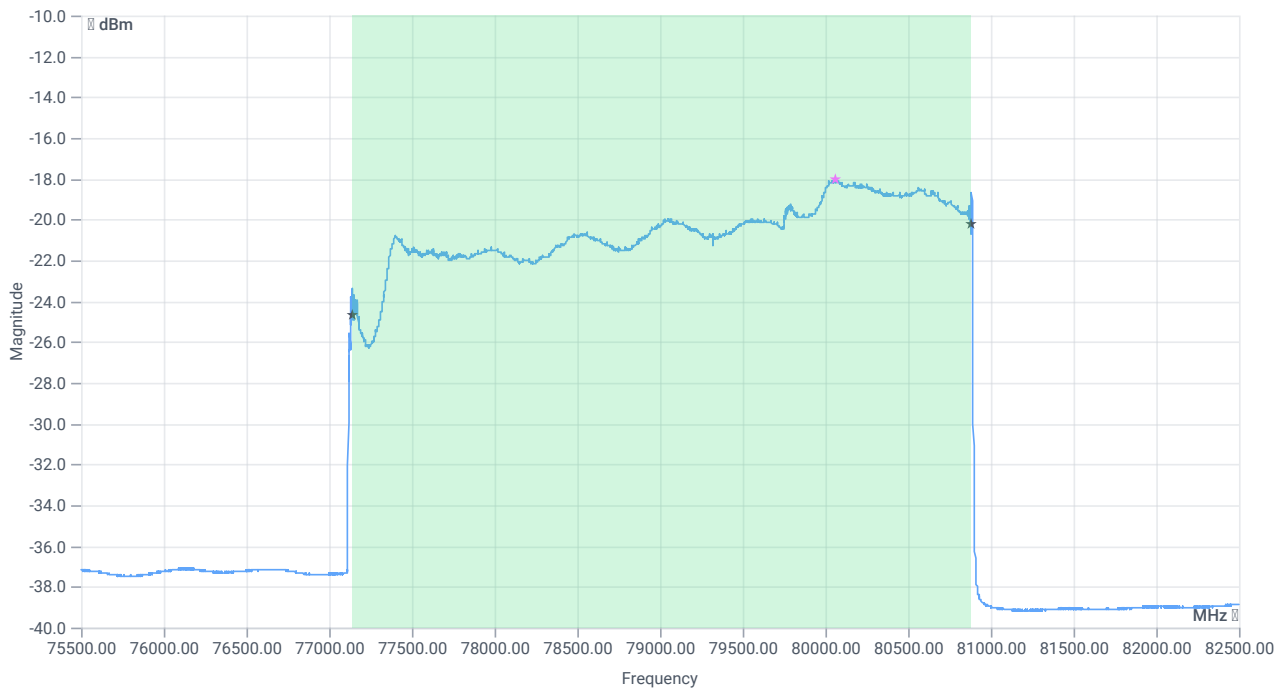

BW 99PCT

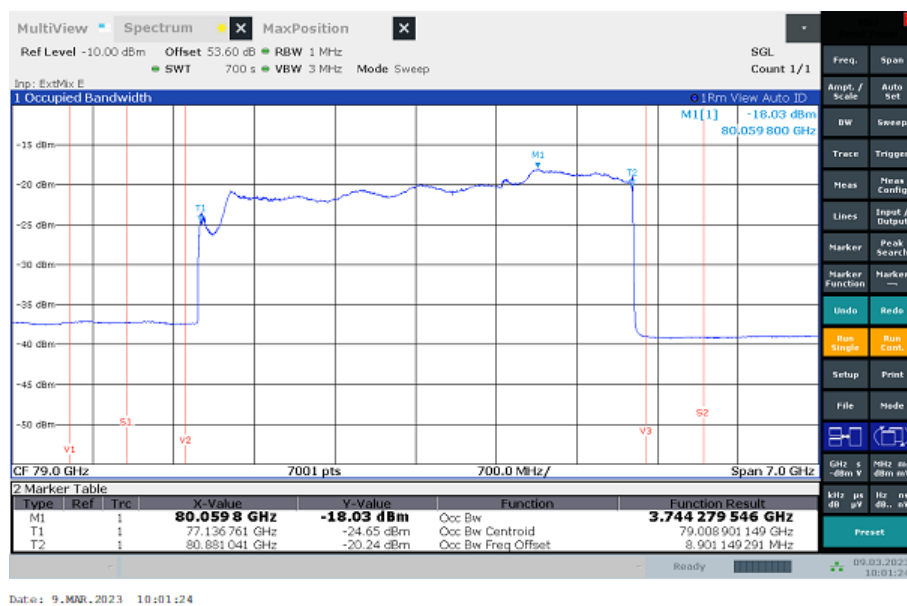

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

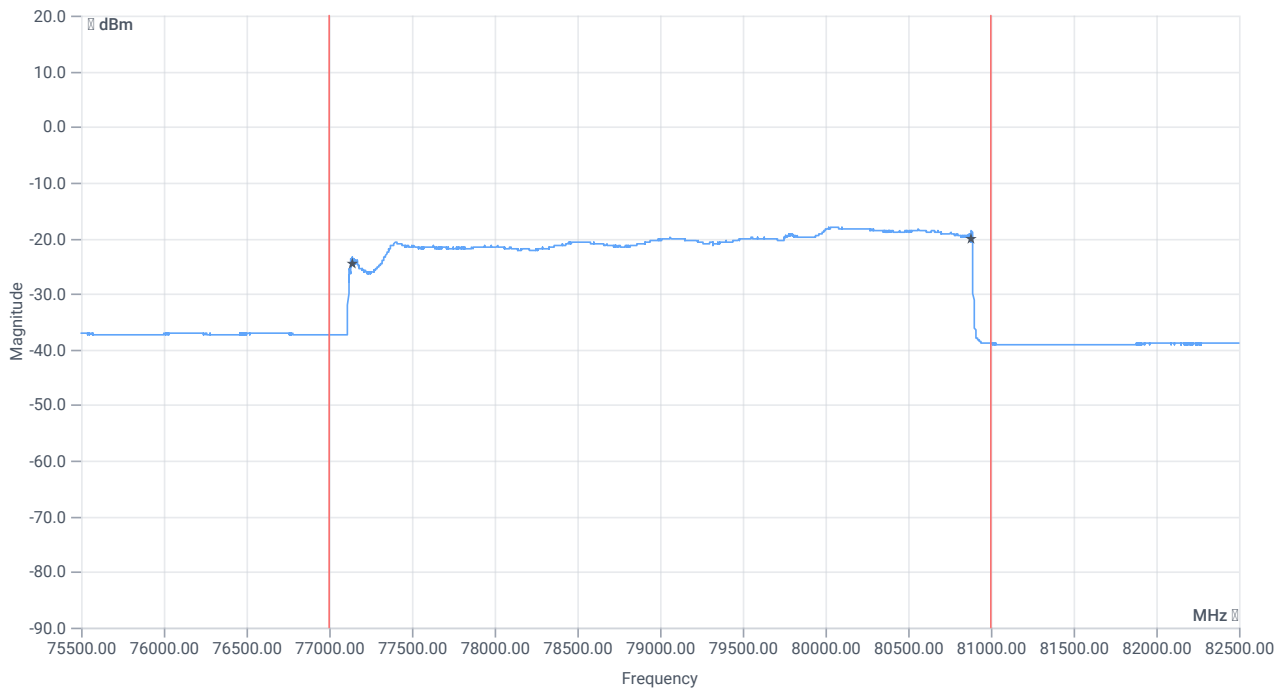

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3744.28	MHz	INFO
T1 99%	77000.00	---	77136.76	MHz	PASS
T2 99%	---	81000.00	80881.04	MHz	PASS
Max value @ 80059.8 MHz	---	---	-18.03	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 10:05:22
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	nom
Voltage	max
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

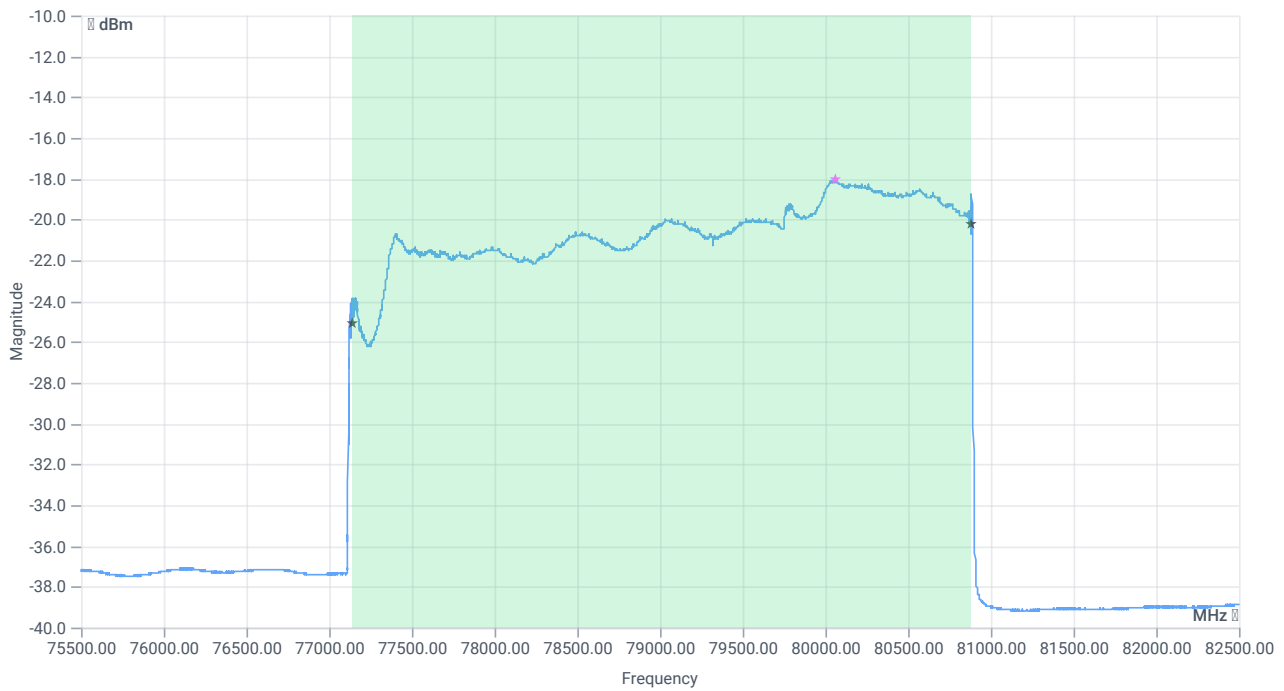

BW 99PCT

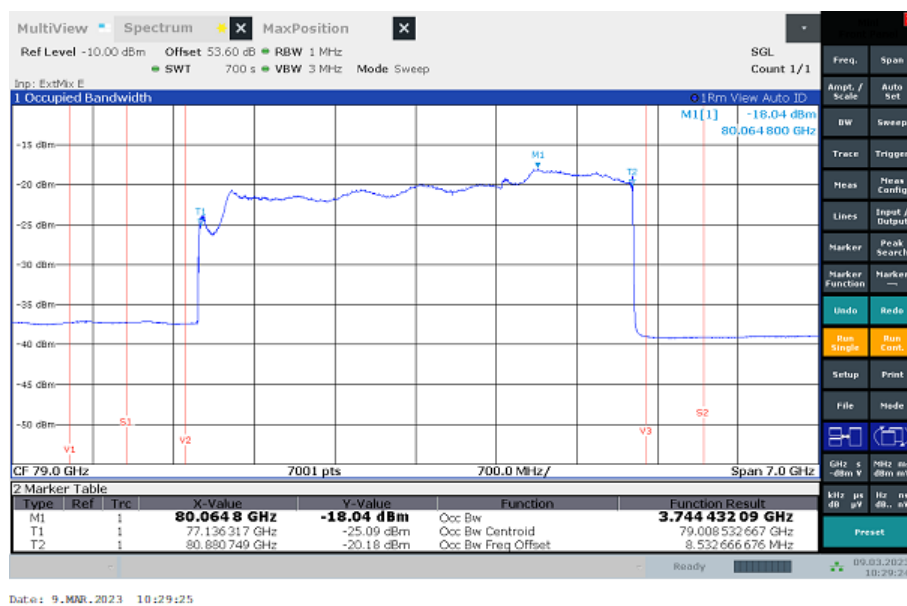

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

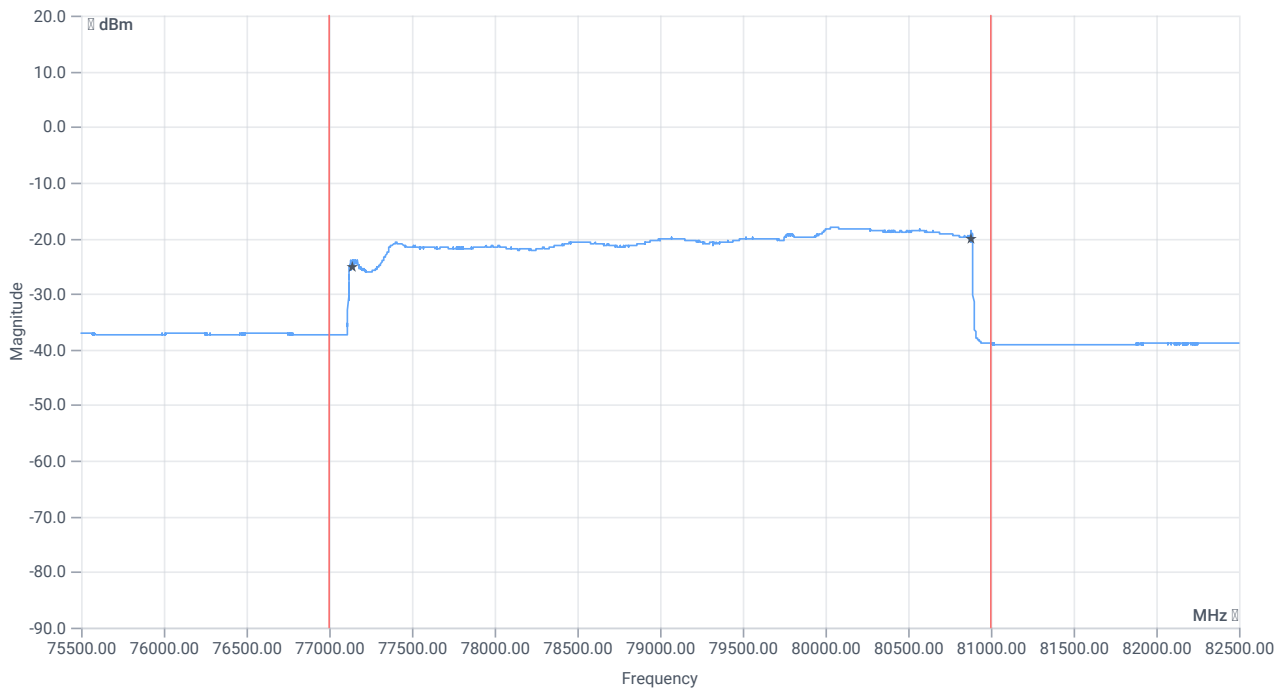

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3744.43	MHz	INFO
T1 99%	77000.00	---	77136.32	MHz	PASS
T2 99%	---	81000.00	80880.75	MHz	PASS
Max value @ 80064.8 MHz	---	---	-18.04	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 10:33:22
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	min
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

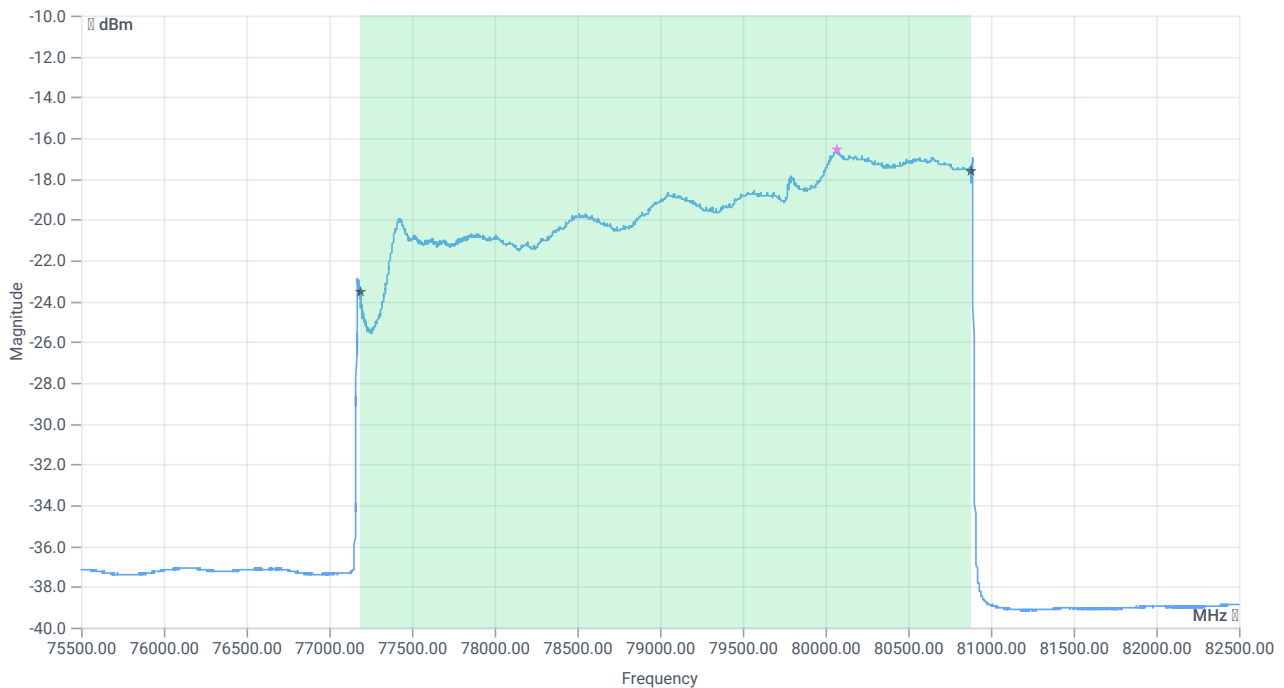

BW 99PCT

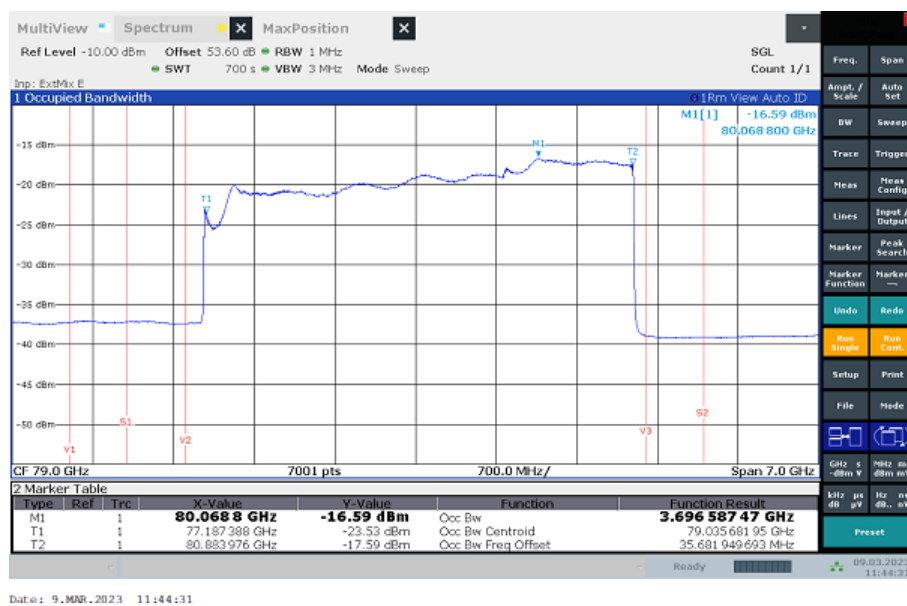

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

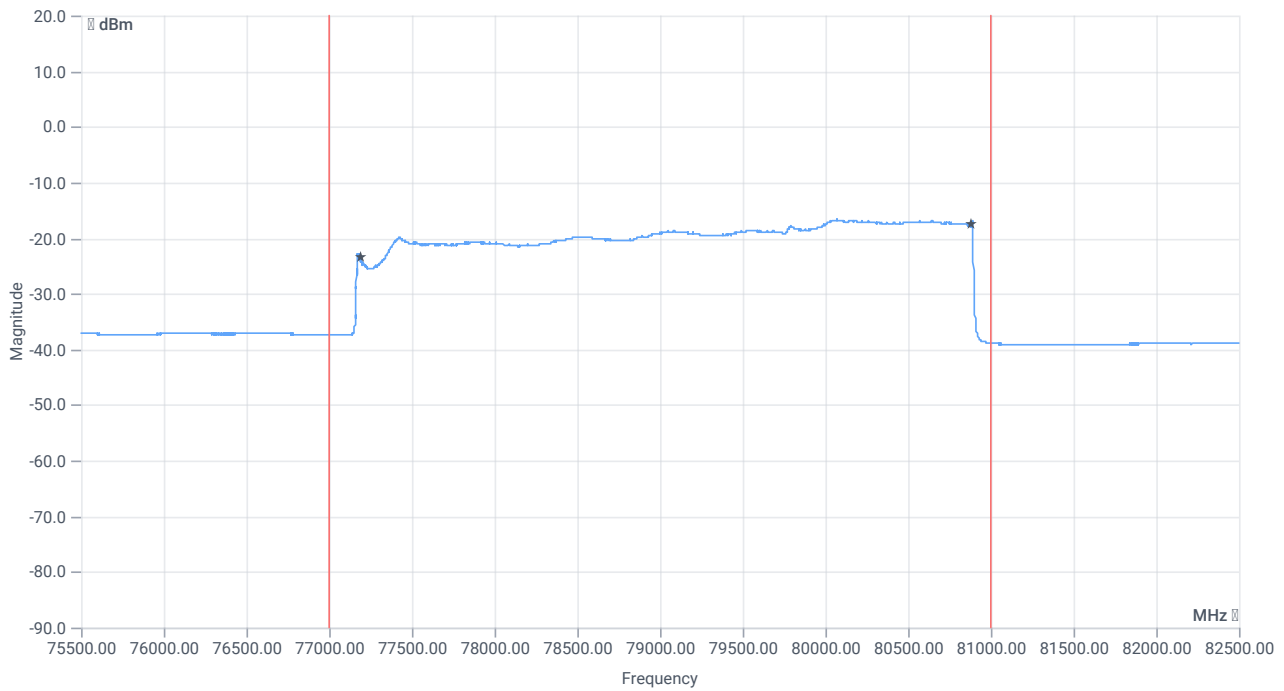

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3696.59	MHz	INFO
T1 99%	77000.00	---	77187.39	MHz	PASS
T2 99%	---	81000.00	80883.98	MHz	PASS
Max value @ 80068.8 MHz	---	---	-16.59	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 11:48:29
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	min
Voltage	min
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

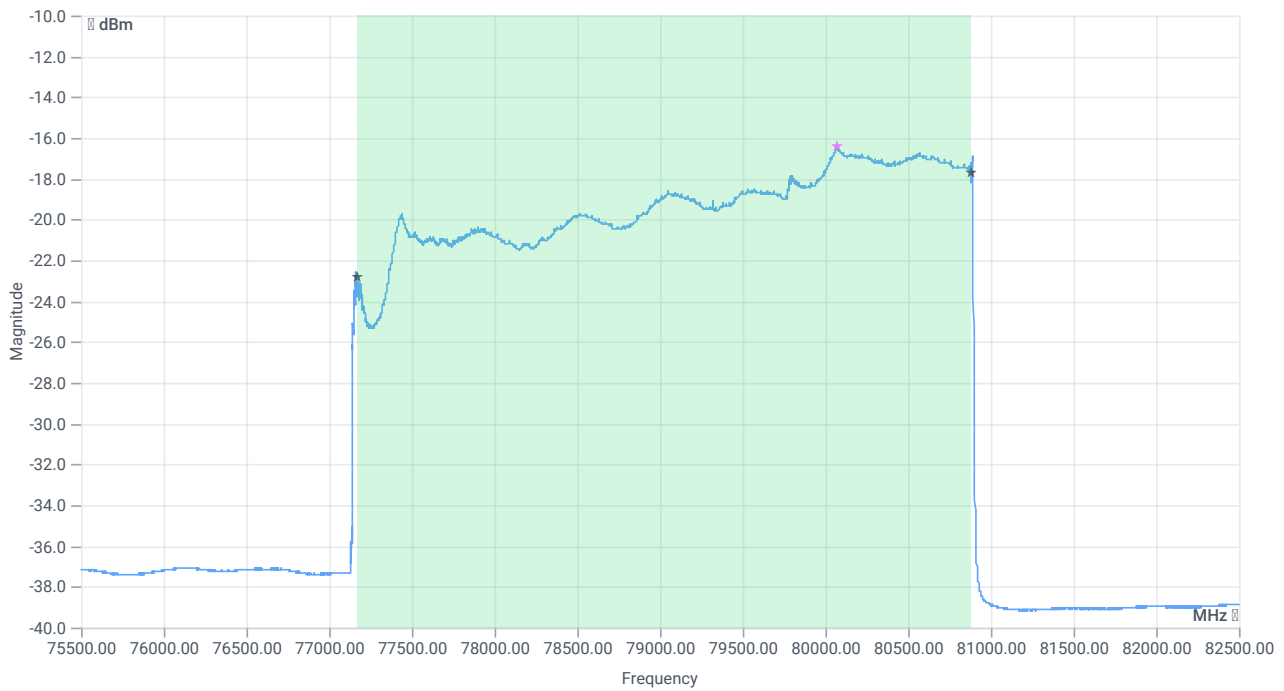

BW 99PCT

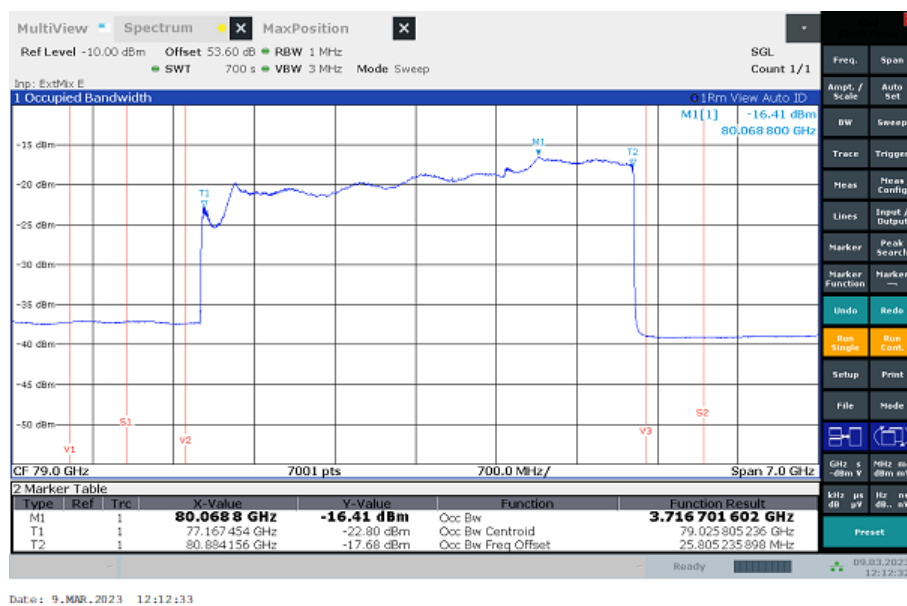

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

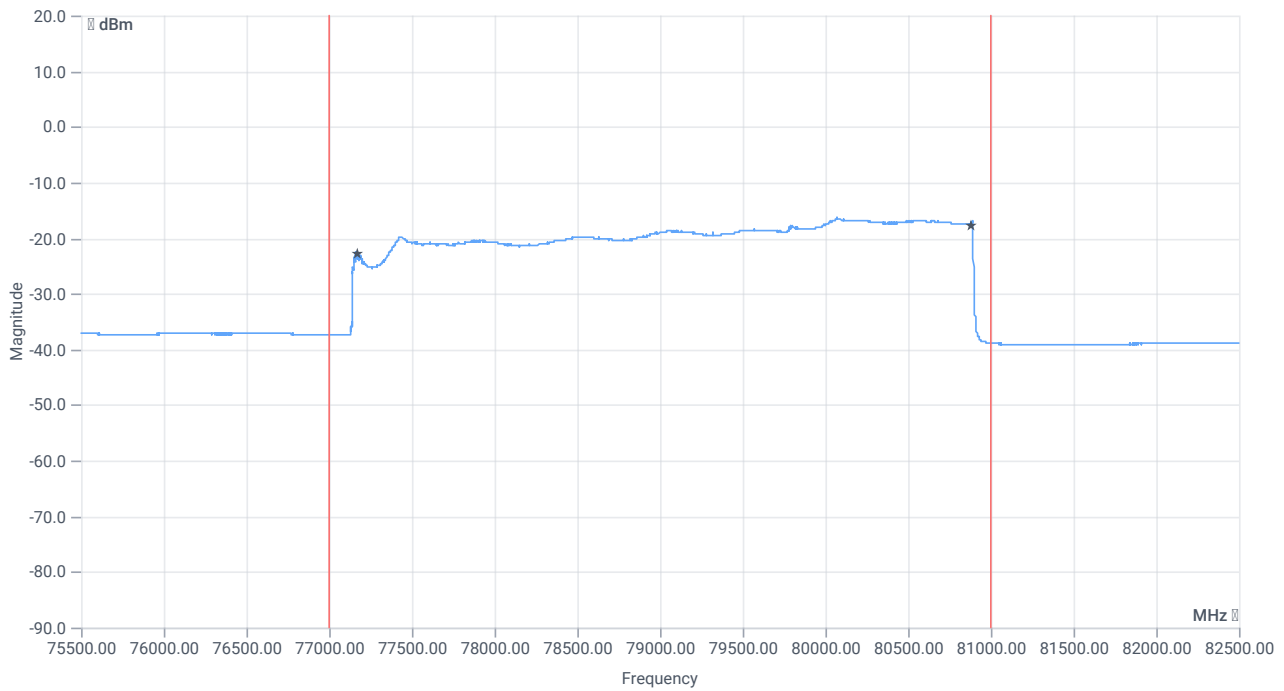

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3716.70	MHz	INFO
T1 99%	77000.00	---	77167.45	MHz	PASS
T2 99%	---	81000.00	80884.16	MHz	PASS
Max value @ 80068.8 MHz	---	---	-16.41	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 12:16:30
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	min
Voltage	max
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

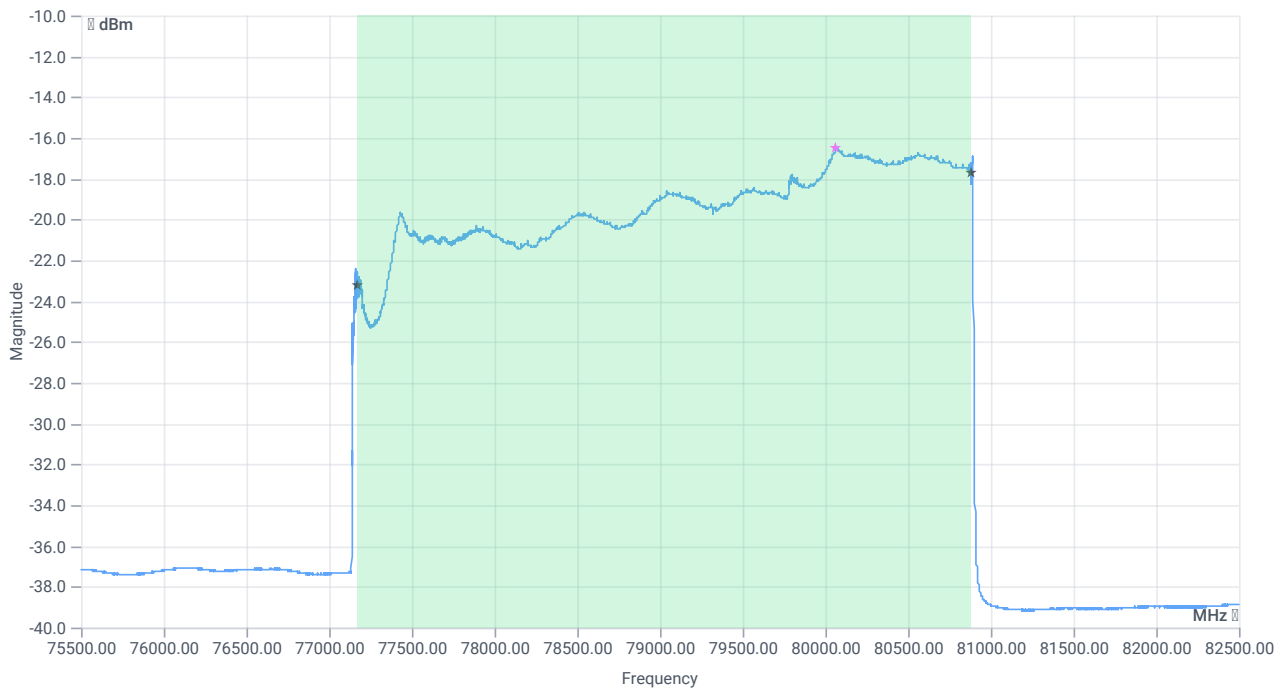

BW 99PCT

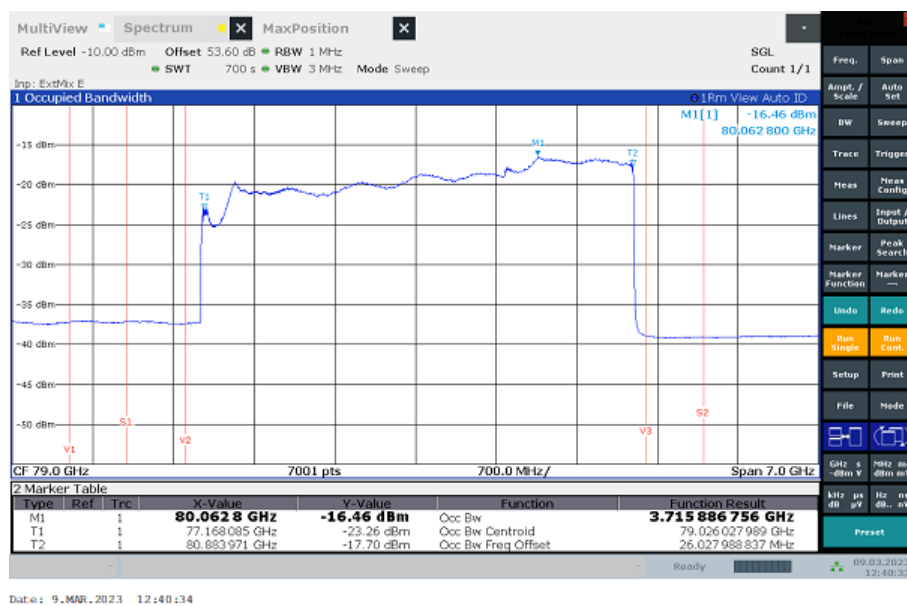

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

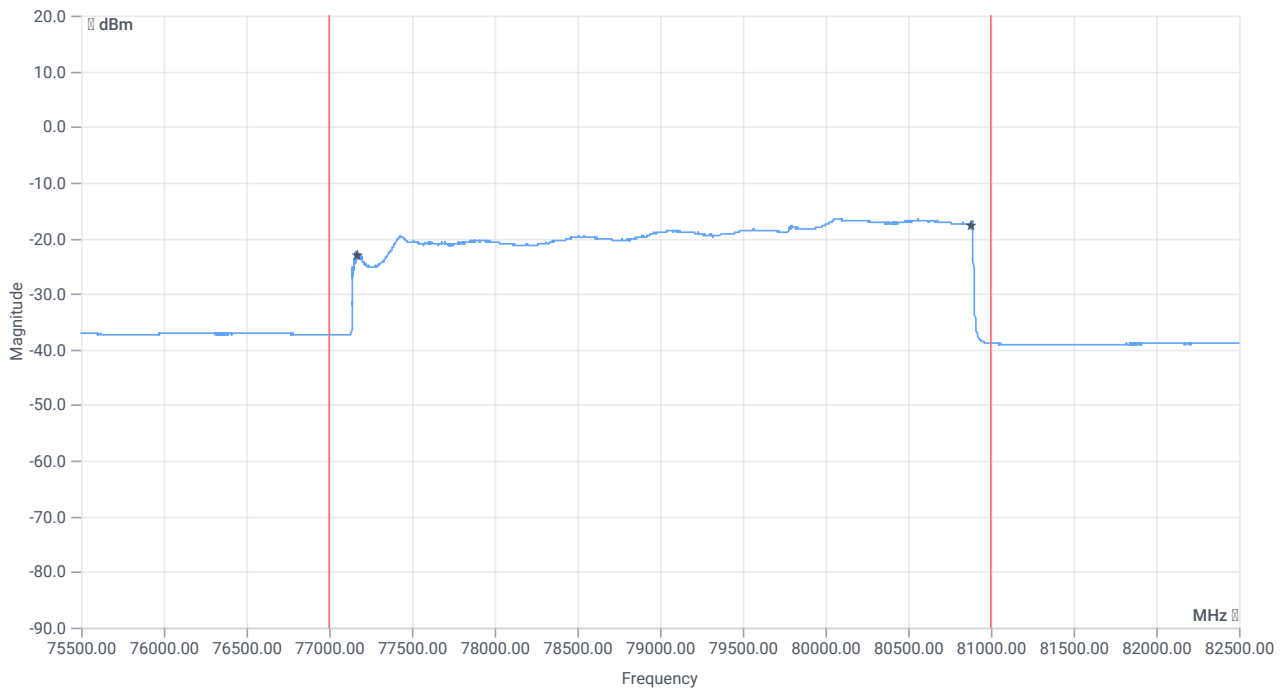

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3715.89	MHz	INFO
T1 99%	77000.00	---	77168.08	MHz	PASS
T2 99%	---	81000.00	80883.97	MHz	PASS
Max value @ 80062.8 MHz	---	---	-16.46	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 12:44:32
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	max
Voltage	nom
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

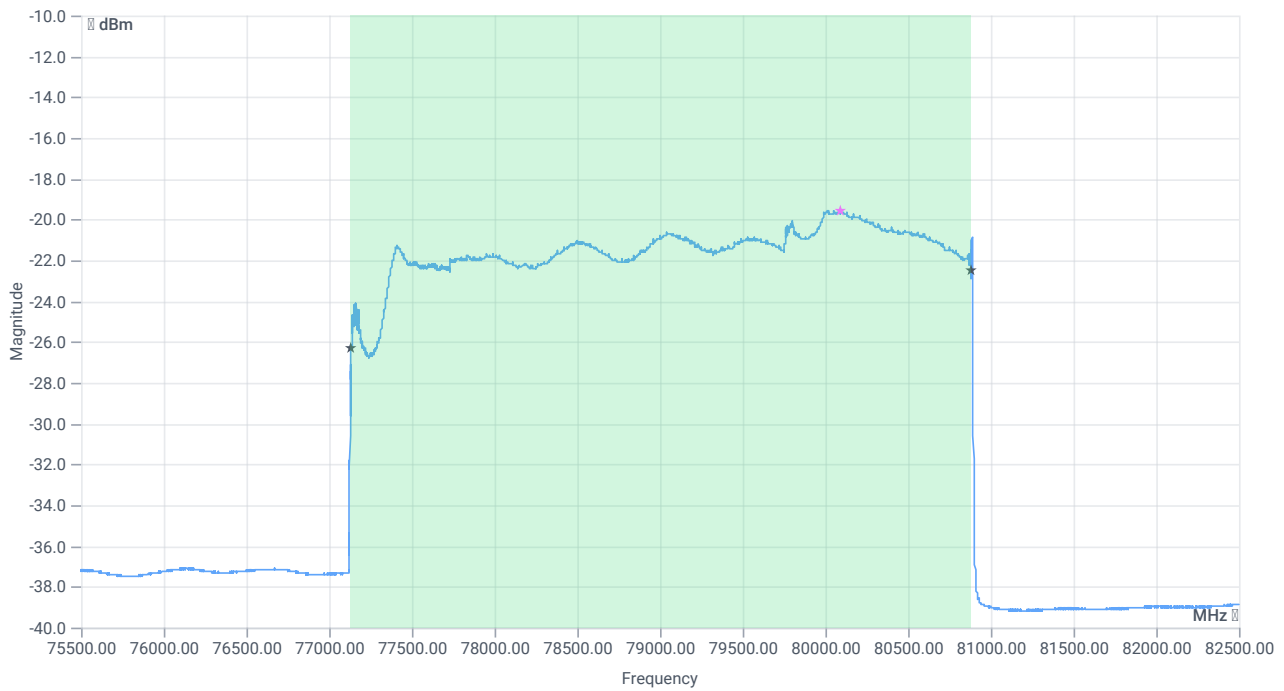

BW 99PCT

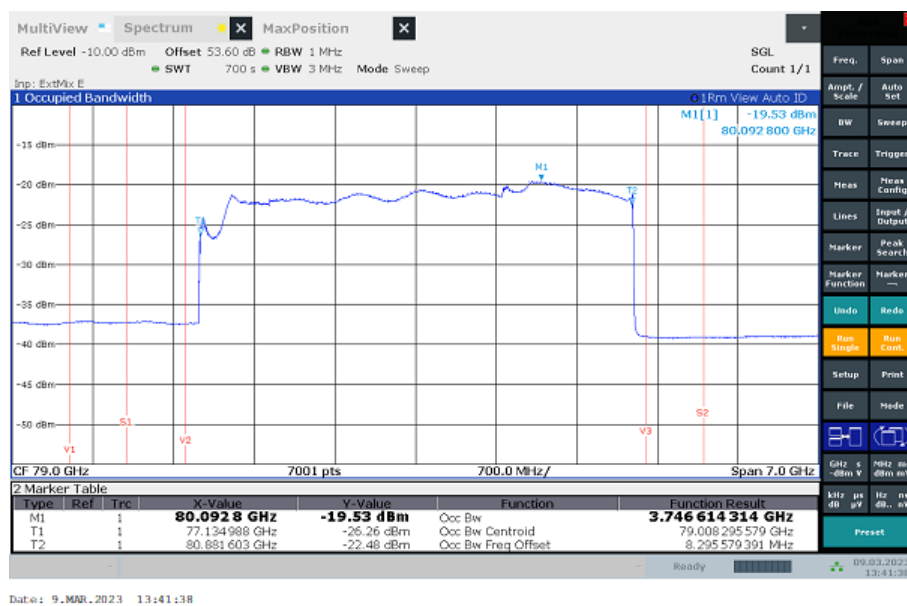

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

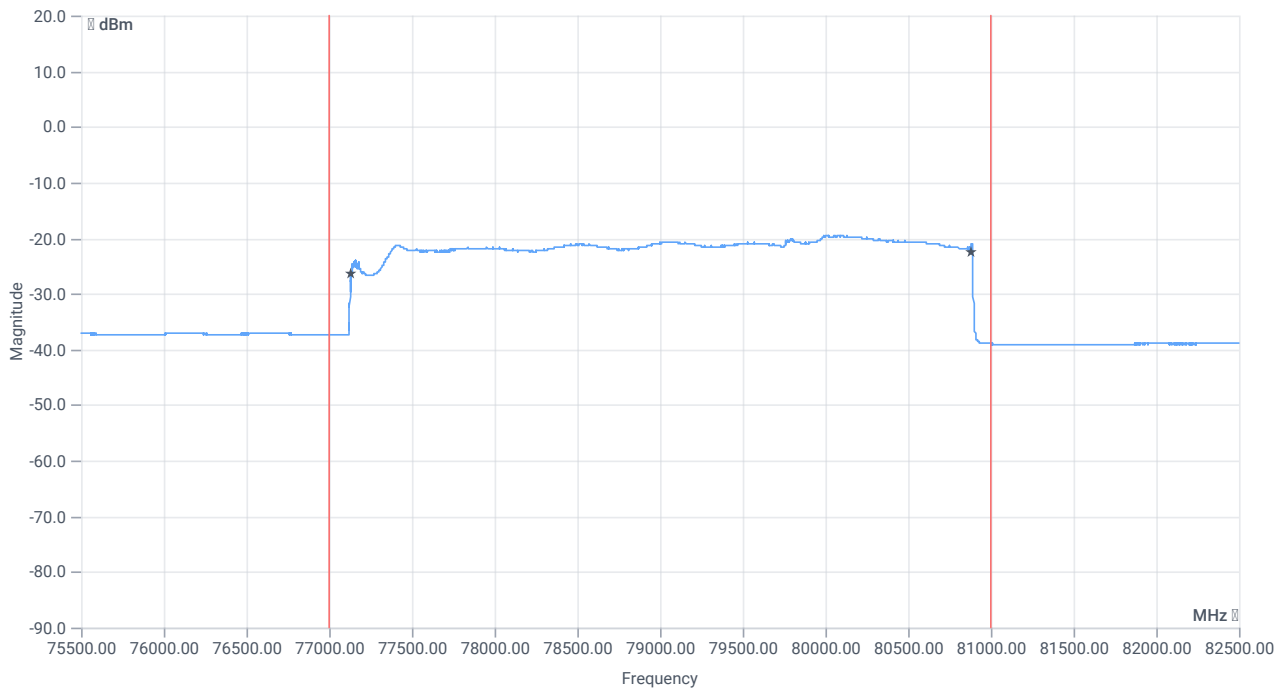

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3746.61	MHz	INFO
T1 99%	77000.00	---	77134.99	MHz	PASS
T2 99%	---	81000.00	80881.60	MHz	PASS
Max value @ 80092.8 MHz	---	---	-19.53	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 13:45:36
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	max
Voltage	min
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

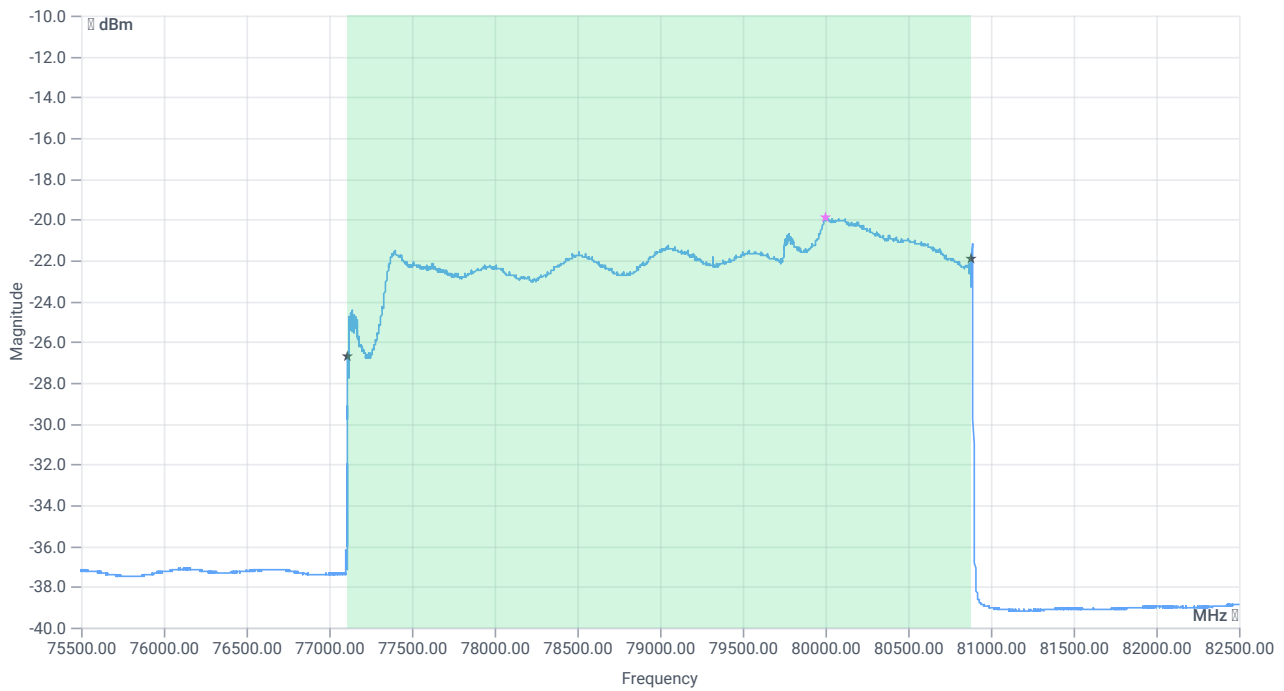

BW 99PCT

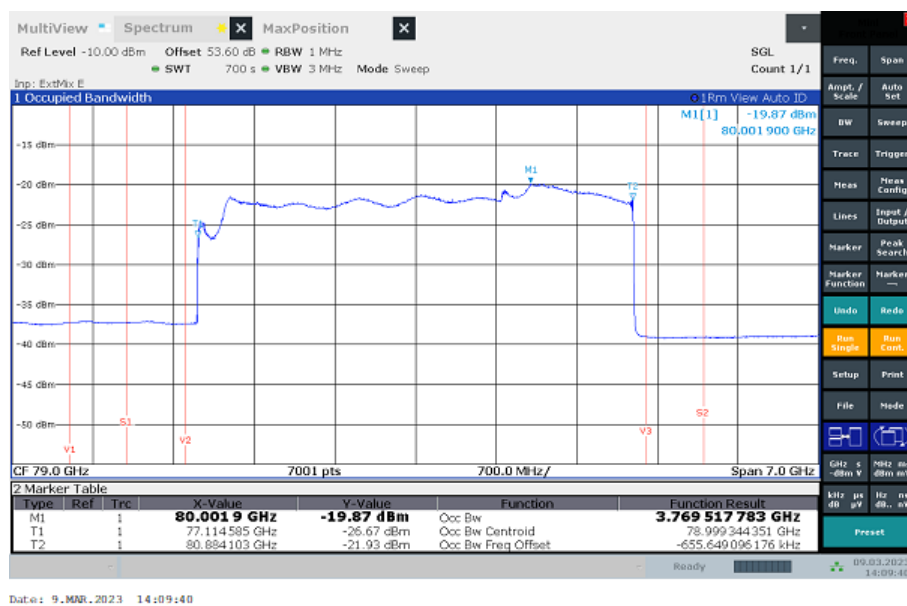

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

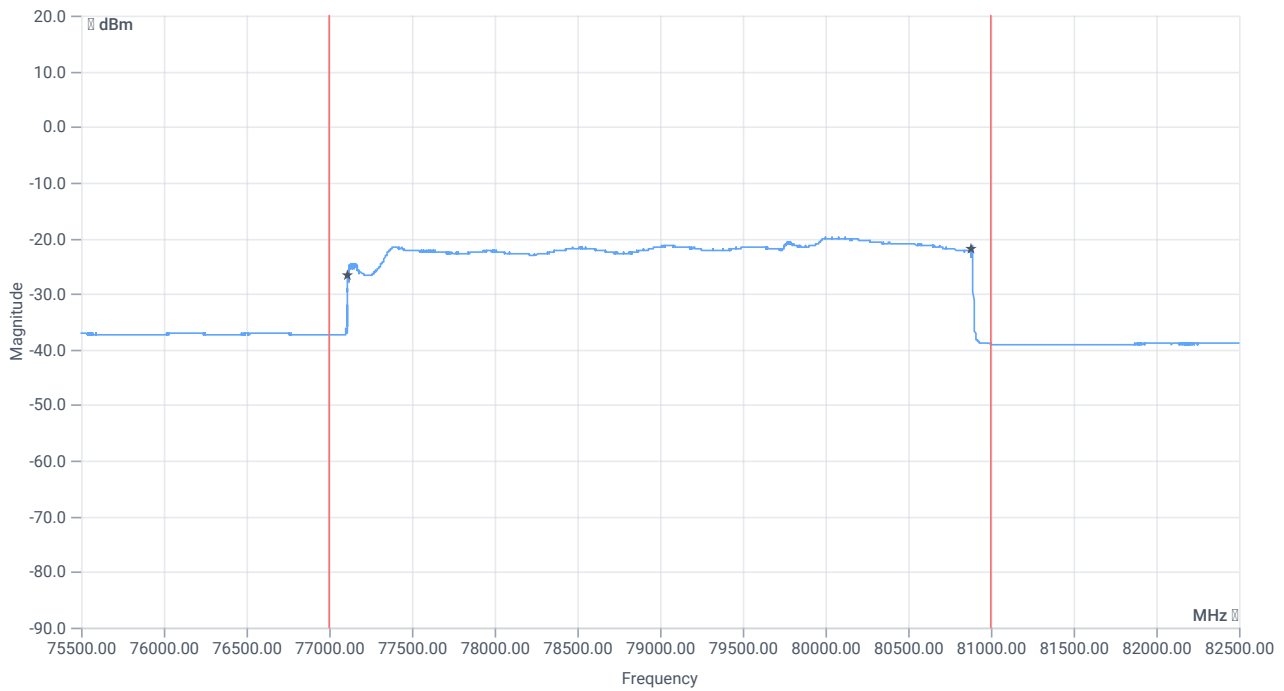

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3769.52	MHz	INFO
T1 99%	77000.00	---	77114.59	MHz	PASS
T2 99%	---	81000.00	80884.10	MHz	PASS
Max value @ 80001.9 MHz	---	---	-19.87	dBm	INFO

Verdict

PASS

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz

Test References

TC Start	09.03.2023 14:13:39
Ambit Temp [°C] Humidity [rel%]	not enabled not enabled
System Version	3.5.0.9
Test Specification	Systems EN -
Test Method	
TC Version	0.0.1
My Description	Systems EN Bandwidth 99pct
Add. Information	Cycle Time: 100ms Mode: Fast

Test Parameter


Switched Path	none
Temperature	max
Voltage	max
Additional Information	Cycle Time: 100ms Mode: Fast

Test Equipment


Signal analyzer,Rohde&Schwarz,FSW-50,1331.5003K50/101560,5.00SP3
Power supply,Agilent Technologies,N5767A,US26F7337F,A.05.06,REV:E
Climatic box,CTS T40/50,58566046820010,NI

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-10.00 53.6 0
Start [MHz] Stop [MHz]	75500.000 82500.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: Time [ms] Count Points per Section Type	700000 1 7001 SWE

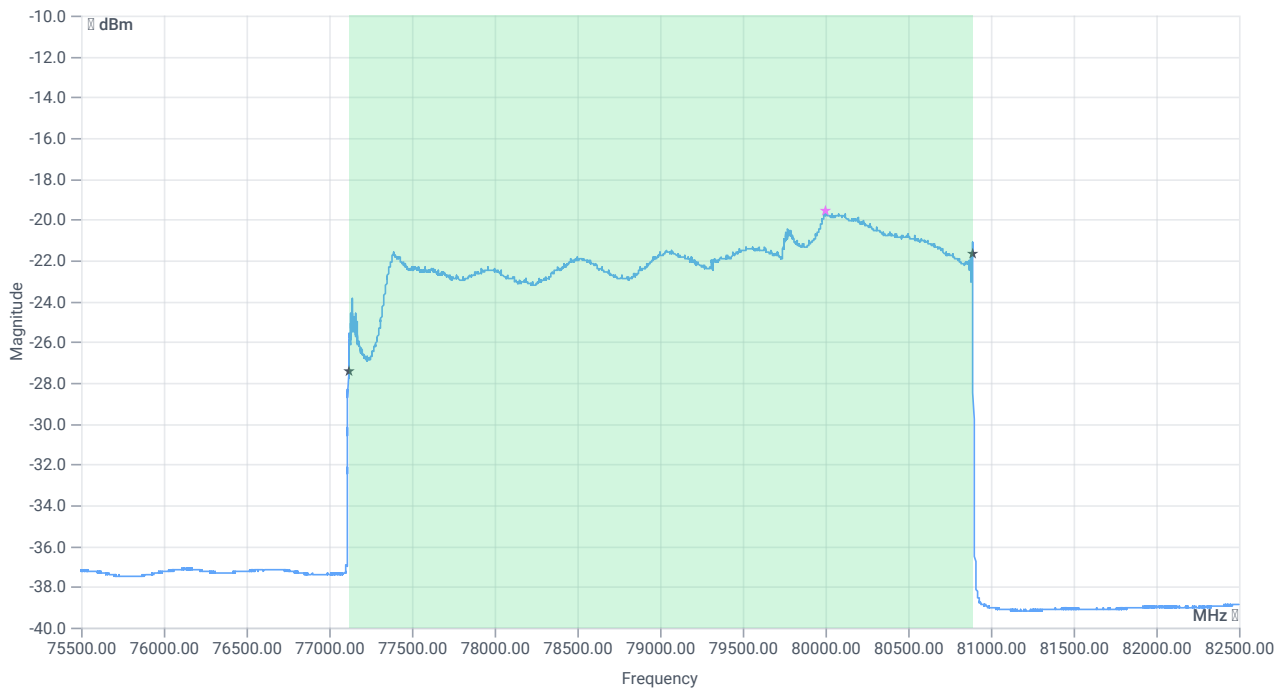

BW 99PCT

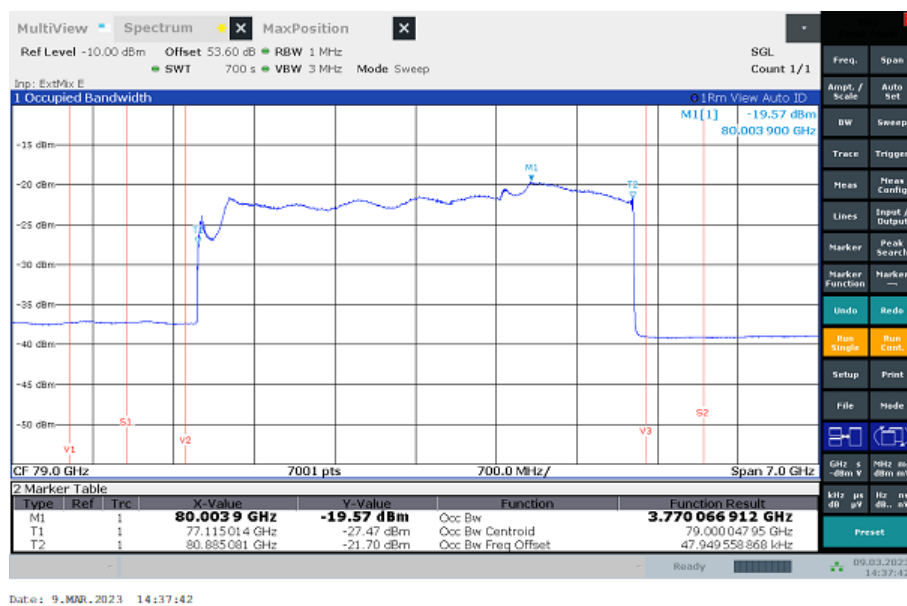

Systems EN # Bandwidth 99pct ~ Mode: Fast 77000-81000 MHz 99PCT

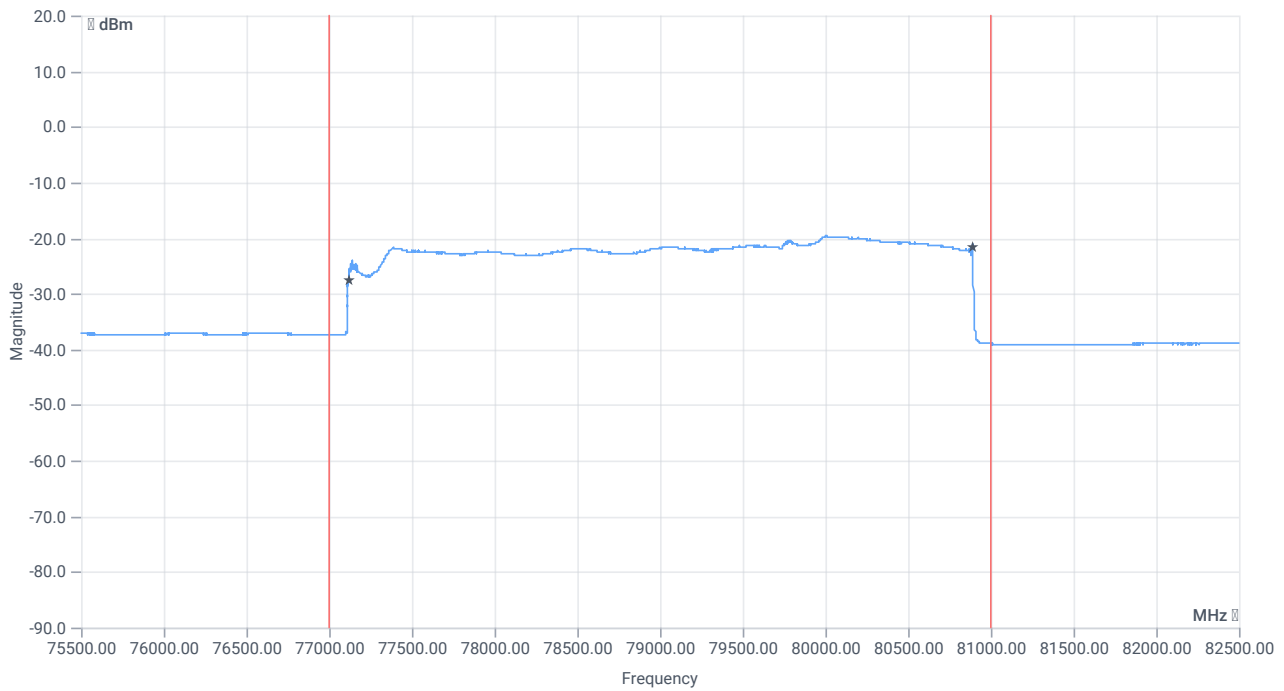

BW within Band 99PCT

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	3770.07	MHz	INFO
T1 99%	77000.00	---	77115.01	MHz	PASS
T2 99%	---	81000.00	80885.08	MHz	PASS
Max value @ 80003.9 MHz	---	---	-19.57	dBm	INFO

Verdict

PASS

- END OF DOCUMENT -