


MATERIAL: Topcoated silver gloss polyester thermal transfer label stock

FINISH: Coated, gloss, 1-color pre-print, black reverse imaging

ADHESIVE: High-strength permanent acrylic

GRAPHICS: Use graphic file 150-00100-DWG Label Certification, ER-SF1, LTE, Cellular.eps

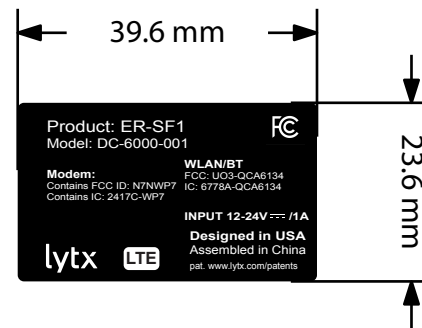

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION		MATERIAL SPECIFICATION	QTY REQD	
PARTS LIST				lytx Label Certification, ER-SF1, LTE, Cellular		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: DECIMALS >0.5 TO <=40 ±0.1MM >40 TO <=80 ±0.2MM >80 TO <=120 ±0.3MM ANGLES ±0.5 °		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE				
		APPROVALS DATE				
		DRAWN SRS	01/06/17			
MATERIAL		CHECKED	SIZE DWG. NO. A 150-00100-DWG A REV.			
FINISH		RESP ENG SRS				01/06/17
DO NOT SCALE DRAWING		MFG ENG				
		QUAL ENG	SCALE 1:1	CAD FILE: Draw1.SLDRW	SHEET 1 OF 1	